



No. DAT-P-114/01-10

# TEST REPORT

No. SAR2005001

|              |                                                  |
|--------------|--------------------------------------------------|
| Test name    | Electromagnetic Field (Specific Absorption Rate) |
| Product      | GSM Triple Frequency Mobile Station              |
| Model        | T538                                             |
| Client       | TCL Mobile Communication Co., Ltd.               |
| Type of test | Entrusted                                        |

Telecommunication Metrology Center  
of Ministry of Information Industry



## **GENERAL TERMS**

1. The test report is invalid if not marked with “exclusive stamp for the test report” or the stamp of the test center.
2. Any copy of the test report is invalid if not re-marked with the “exclusive stamp for the test report” or the stamp of the test center.
3. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
4. The test report is invalid if there is any evidence of erasure and/or falsification.
5. If there is any dissidence for the test report, please file objection to the test center within 15 days from the date of receiving the test report.
6. Normally, entrust test is only responsible for the samples that have undergone the test.
7. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permissions of the test center.

Address: No. 52, Huayuanbei Road, Beijing, P. R. China

Post code: 100083

Cable: 04282

Telephone: +86 10 62302041

Fax: +86 10 62304793

**Telecommunication Metrology Center  
of Ministry of Information Industry**


No. SAR2005001

Page 3 of 60


**GENERAL SUMMARY**

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                               |                                    |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------------------------------------|
| <b>Product</b>                 | GSM Triple Frequency Mobile Station                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>Model</b>                  | T538                               |
| <b>Client</b>                  | TCL Mobile Communication Co., Ltd.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>Manufacturer</b>           | TCL Mobile Communication Co., Ltd. |
| <b>Type of test</b>            | Entrusted                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>Arrival Date of sample</b> | December 17, 2004                  |
| <b>Place of sampling</b>       | (Blank)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Carrier of the samples</b> | Luo Jian                           |
| <b>Quantity of the samples</b> | One                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>Date of product</b>        | (Blank)                            |
| <b>Base of the samples</b>     | (Blank)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Items of test</b>          | SAR                                |
| <b>Series number</b>           | 354883000008632                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                               |                                    |
| <b>Standard(s)</b>             | <p><b>EN 50360–2001:</b> Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.</p> <p><b>EN 50361–2001:</b> Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.</p> <p><b>IEC 62209 Draft:</b> Procedure to Determine the Specific Absorption Rate(SAR) for Hand-hold Mobile Phone (Part 2)</p> <p><b>ANSI C95.1–1999:</b> IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz</p> <p><b>OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01):</b> Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.</p> <p><b>IEEE 1528–2003:</b> Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.</p> |                               |                                    |
| <b>Conclusion</b>              | <p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.</p> <p>General Judgment: <b>Pass</b></p> <p style="text-align: right;">(Stamp)<br/><b>Date of issue: January 10, 2005</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                               |                                    |
| <b>Comment</b>                 | <p>TX Freq. Band: 1850-1910 MHz (PCS)</p> <p>Max. Power: 1 Watt (PCS)</p> <p>Antenna Character: 21mm</p> <p>The test result only responds to the measured sample.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                               |                                    |


Approved by

  
(Lu Bingsong)

Revised by

  
(Wang Hongbo)

Performed by

  
(Qi Dianyuan)

---

**TABLE OF CONTENT**

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| <b>1 COMPETENCE AND WARRANTIES .....</b>                               | <b>5</b>  |
| <b>2 GENERAL CONDITIONS.....</b>                                       | <b>5</b>  |
| <b>3 DESCRIPTION OF EUT.....</b>                                       | <b>5</b>  |
| 3.1 ADDRESSING INFORMATION RELATED TO EUT.....                         | 5         |
| 3.2 CONSTITUENTS OF EUT .....                                          | 6         |
| 3.3 GENERAL DESCRIPTION.....                                           | 7         |
| <b>4 OPERATIONAL CONDITIONS DURING TEST .....</b>                      | <b>7</b>  |
| 4.1 SCHEMATIC TEST CONFIGURATION.....                                  | 7         |
| 4.2 SAR MEASUREMENT SET-UP.....                                        | 7         |
| 4.3 DASY4 E-FIELD PROBE SYSTEM.....                                    | 8         |
| 4.4 E-FIELD PROBE CALIBRATION .....                                    | 9         |
| 4.5 OTHER TEST EQUIPMENT .....                                         | 10        |
| 4.5.1 DEVICE HOLDER FOR TRANSMITTERS .....                             | 10        |
| 4.5.2 PHANTOM.....                                                     | 10        |
| 4.6 EQUIVALENT TISSUES.....                                            | 10        |
| 4.7 SYSTEM SPECIFICATIONS .....                                        | 11        |
| 4.7.1 ROBOTIC SYSTEM SPECIFICATIONS .....                              | 11        |
| <b>5 CHARACTERISTICS OF THE TEST .....</b>                             | <b>11</b> |
| 5.1 APPLICABLE LIMIT REGULATIONS .....                                 | 11        |
| 5.2 APPLICABLE MEASUREMENT STANDARDS.....                              | 12        |
| 5.3 CHARACTER OF THE TEST.....                                         | 12        |
| <b>6 LABORATORY ENVIRONMENT .....</b>                                  | <b>12</b> |
| <b>7 TEST RESULTS .....</b>                                            | <b>12</b> |
| 7.1 DIELECTRIC PERFORMANCE .....                                       | 12        |
| 7.2 SYSTEM VALIDATION.....                                             | 13        |
| 7.3 SUMMARY OF MEASUREMENT RESULTS (HEAD, PCS 1900 MHz BAND) .....     | 13        |
| 7.4 SUMMARY OF MEASUREMENT RESULTS (BODY-WORN, PCS 1900 MHz BAND)..... | 14        |
| 7.5 CONCLUSION .....                                                   | 15        |
| <b>8 MEASUREMENT UNCERTAINTY .....</b>                                 | <b>15</b> |
| <b>9 MAIN TEST INSTRUMENTS.....</b>                                    | <b>16</b> |
| <b>10 TEST PERIOD .....</b>                                            | <b>17</b> |
| <b>11 TEST LOCATION.....</b>                                           | <b>17</b> |
| <b>ANNEX A : MEASUREMENT PROCESS .....</b>                             | <b>18</b> |
| <b>ANNEX B : TEST LAYOUT .....</b>                                     | <b>19</b> |
| <b>ANNEX C: GRAPH RESULTS .....</b>                                    | <b>24</b> |
| <b>ANNEX D SYSTEM VALIDATION RESULTS.....</b>                          | <b>60</b> |

## **1 COMPETENCE AND WARRANTIES**

**Telecommunication Metrology Center of Ministry of Information Industry** is a test laboratory accredited by DAR (DATech) – Deutschen Akkreditierungs Rat (Deutsche Akkreditierungsstelle Technik) for the tests indicated in the Certificate No. **DAT-P-114/01-10**.

**Telecommunication Metrology Center of Ministry of Information Industry** is a test laboratory accredited by CNAL – China National Accreditation Committee for Laboratories, for the tests indicated in the Certificate No. **L0442**.

Telecommunication Metrology Center of Ministry of Information Industry is a test laboratory competent to carry out the tests described in this test report.

**Telecommunication Metrology Center of Ministry of Information Industry** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at **Telecommunication Metrology Center of Ministry of Information Industry** at the time of execution of the test.

**Telecommunication Metrology Center of Ministry of Information Industry** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test.

## **2 GENERAL CONDITIONS**

- 2.1 This report only refers to the item that has undergone the test.
- 2.2 This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.
- 2.3 This document is only valid if complete; no partial reproduction can be made without written approval of Telecommunication Metrology Center of Ministry of Information Industry.
- 2.4 This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Telecommunication Metrology Center of Ministry of Information Industry and the Accreditation Bodies, if it applies.

## **3 DESCRIPTION OF EUT**

### **3.1 Addressing Information Related to EUT**

**Table 1: Applicant (The Client)**

|                 |                                                                           |
|-----------------|---------------------------------------------------------------------------|
| Name or Company | TCL Mobile Communication Co., Ltd.                                        |
| Address/Post    | No.23 Zone, Zhongkai High-technology Development Zone, Huizhou, Guangdong |
| City            | Huizhou                                                                   |
| Postal Code     | 516006                                                                    |
| Country         | China                                                                     |
| Telephone       | +86 752 2636729                                                           |

**Telecommunication Metrology Center  
of Ministry of Information Industry**

No. SAR2005001

Page 6 of 60

|     |                 |
|-----|-----------------|
| Fax | +86 752 2636525 |
|-----|-----------------|

**Table 2: Manufacturer**

|                 |                                                                        |
|-----------------|------------------------------------------------------------------------|
| Name or Company | TCL Mobile Communication Co., Ltd.                                     |
| Address/Post    | 23 Zone, Zhongkai High-technology Development Zone, Huizhou, Guangdong |
| City            | Huizhou                                                                |
| Postal Code     | 516006                                                                 |
| Country         | China                                                                  |
| Telephone       | +86 752 2636729                                                        |
| Fax             | +86 752 2636525                                                        |

### 3.2 Constituents of EUT

**Table 3: Constituents of Samples**

| Description     | Model       | Serial Number   | Manufacturer                            |
|-----------------|-------------|-----------------|-----------------------------------------|
| Handset         | T538        | 354883000008632 | TCL Mobile Communication Co., Ltd.      |
| Lithium Battery | GC06-1LB550 | /               | TCL Hyper-Power Batteries Inc.          |
| AC/DC Adapter   | WYS-036     | /               | Huizhou Weiyeshun Electronics Co., Ltd. |



**Figure 1: Constituents of the sample (Lithium Battery is in the Handset)**

### **3.3 General Description**

Equipment Under Test (EUT) is a model of GSM Phase II portable Mobile Station (MS) with non-integrated antenna. It consists of Handset and normal options: Lithium Battery and AC/DC Adapter as Table 3 and Fig.1.

The sample undergoing test was selected by the Client.

Components list please refer to documents of the manufacturer.

## **4 OPERATIONAL CONDITIONS DURING TEST**

### **4.1 Schematic Test Configuration**

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established. Upon the client's request, only the band of PCS 1900 MHz will be tested and the result will be showed in this report. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 512, 661 and 810 respectively in the case of PCS 1900 MHz. The EUT is commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

### **4.2 SAR Measurement Set-up**

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than  $\pm 0.02\text{mm}$ . Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

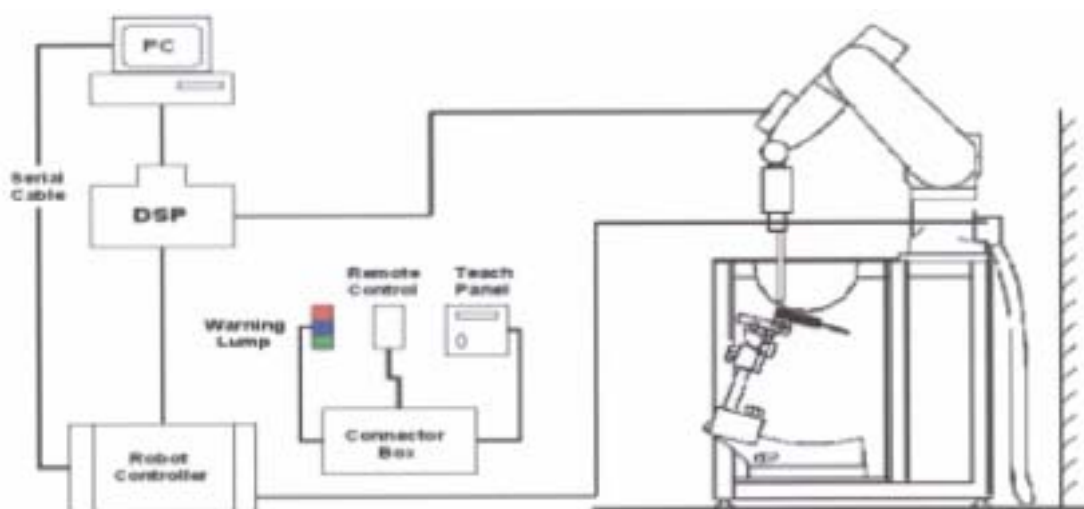


Figure 2. SAR Lab Test Measurement Set-up

The DAE3 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

### 4.3 Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ .

#### ET3DV6 Probe Specification

|              |                                                                                                                                                                                                                                                     |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction | <p>Symmetrical design with triangular core</p> <p>Built-in optical fiber for surface detection System(ET3DV6 only)</p> <p>Built-in shielding against static charges</p> <p>PEEK enclosure material(resistant to organic solvents, e.q., glycol)</p> |
| Calibration  | <p>In air from 10 MHz to 2.5 GHz</p> <p>In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz and 1.8GHz (accuracy<math>\pm 8\%</math>)</p> <p>Calibration for other liquids and frequencies upon request</p>                      |
| Frequency    | 10 MHz to > 6 GHz; Linearity: $\pm 0.2\text{ dB}$                                                                                                                                                                                                   |



Figure 3. ET3DV6 E-field Probe

|                   |                                                                                                                                             |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
|                   | (30 MHz to 3 GHz)                                                                                                                           |
| Directivity       | ±0.2 dB in brain tissue (rotation around probe axis)<br>±0.4 dB in brain tissue (rotation normal probe axis)                                |
| Dynamic Range     | 5u W/g to > 100mW/g; Linearity: ±0.2dB                                                                                                      |
| Surface Detection | ±0.2 mm repeatability in air and clear liquids<br>over diffuse reflecting surface(ET3DV6 only)                                              |
| Dimensions        | Overall length: 330mm<br>Tip length: 16mm<br>Body diameter: 12mm<br>Tip diameter: 6.8mm<br>Distance from probe tip to dipole centers: 2.7mm |
| Application       | General dosimetry up to 3GHz<br>Compliance tests of mobile phones<br>Fast automatic scanning in arbitrary phantoms                          |



**Figure 4. ET3DV6 E-field probe**

#### 4.4 E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than ± 10%. The spherical isotropy was evaluated and found to be better than ± 0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

Or

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density (kg/m<sup>3</sup>).

## 4.5 Other Test Equipment

### 4.5.1 Device Holder for Transmitters

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Figure 5. Device Holder

### 4.5.2 Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

|                 |                                 |
|-----------------|---------------------------------|
| Shell Thickness | 2±0.1 mm                        |
| Filling Volume  | Approx. 20 liters               |
| Dimensions      | 810 x 1000 x 500 mm (H x L x W) |
| Available       | Special                         |

## 4.6 Equivalent Tissues

The liquid used for the frequency range of 800-2000 MHz consisted of water, sugar, salt and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 4 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528.



Figure 6. Generic Twin Phantom

**Table 4. Composition of the Head Tissue Equivalent Matter**

| MIXTURE %                             | FREQUENCY 1850-1910MHz                  |
|---------------------------------------|-----------------------------------------|
| Water                                 | 55.242                                  |
| Glycol monobutyl                      | 44.452                                  |
| Salt                                  | 0.306                                   |
| Dielectric Parameters<br>Target Value | f=1900MHz $\epsilon=40.0$ $\sigma=1.40$ |

**Table 5. Composition of the Body Tissue Equivalent Matter**

| MIXTURE %                             | FREQUENCY 1900MHz                       |
|---------------------------------------|-----------------------------------------|
| Water                                 | 69.91                                   |
| Glycol monobutyl                      | 29.96                                   |
| Salt                                  | 0.13                                    |
| Dielectric Parameters<br>Target Value | f=1900MHz $\epsilon=53.3$ $\sigma=1.52$ |

## 4.7 System Specifications

### 4.7.1 Robotic System Specifications

#### Specifications

**Positioner:** Stäubli Unimation Corp. Robot Model: RX90L

**Repeatability:**  $\pm 0.02$  mm

**No. of Axis:** 6

#### Data Acquisition Electronic (DAE) System

##### Cell Controller

**Processor:** Pentium III

**Clock Speed:** 800 MHz

**Operating System:** Windows 2000

##### Data Converter

**Features:** Signal Amplifier, multiplexer, A/D converter, and control logic

**Software:** DASY4 software

**Connecting Lines:** Optical downlink for data and status info.

Optical uplink for commands and clock

## 5 CHARACTERISTICS OF THE TEST

### 5.1 Applicable Limit Regulations

**EN 50360–2001:** Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the maximum exposure limit of **2.0 W/kg** as averaged over any 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

**ANSI C95.1–1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

## 5.2 Applicable Measurement Standards

**EN 50361–2001:** Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

**IEC 62209 Draft :** Procedure to Determine the Specific Absorption Rate(SAR) for Hand-held Mobile Phone (Part 2)

**OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.**

**IEEE 1528–2003:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

They specify the measurement method for demonstration of compliance with the SAR limits for such equipments.

## 5.3 Character of the Test

Handsets that are held on the side of a person's head next to the ear have been tested using realistic-shaped head phantoms.

Since it may be used for body-worn situation, the mobile phone is test with the flat phantom to simulate this case.

# 6 LABORATORY ENVIRONMENT

**Table 6: The Ambient Conditions during EMF Test**

|                                                                                                                                                                                                 |                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Temperature                                                                                                                                                                                     | Min. = 15 °C, Max. = 30 °C |
| Relative humidity                                                                                                                                                                               | Min. = 30%, Max. = 70%     |
| Ground system resistance                                                                                                                                                                        | < 0.5 $\Omega$             |
| Ambient noise is checked and found very low and in compliance with requirement of standards.<br>Reflection of surrounding objects is minimized and in compliance with requirement of standards. |                            |

# 7 TEST RESULTS

## 7.1 Dielectric Performance

**Table 7: Dielectric Performance of Head Tissue Simulating Liquid**

|                                                                                                                     |           |                         |                             |
|---------------------------------------------------------------------------------------------------------------------|-----------|-------------------------|-----------------------------|
| Measurement is made at temperature 22.5 °C and relative humidity 49%.<br>Liquid temperature during the test: 21.4°C |           |                         |                             |
| /                                                                                                                   | Frequency | Permittivity $\epsilon$ | Conductivity $\sigma$ (S/m) |
| Target value                                                                                                        | 1900 MHz  | 40.0                    | 1.40                        |
| Measurement value<br>(Average of 10 tests)                                                                          | 1900 MHz  | 40.1                    | 1.41                        |

**Table 8: Dielectric Performance of Body Tissue Simulating Liquid**

| Measurement is made at temperature 22.6 °C and relative humidity 51%.<br>Liquid temperature during the test: 22.0°C |           |                         |                             |
|---------------------------------------------------------------------------------------------------------------------|-----------|-------------------------|-----------------------------|
| /                                                                                                                   | Frequency | Permittivity $\epsilon$ | Conductivity $\sigma$ (S/m) |
| <b>Target value</b>                                                                                                 | 1900 MHz  | 53.30                   | 1.52                        |
| <b>Measurement value<br/>(Average of 10 tests)</b>                                                                  | 1900 MHz  | 52.9                    | 1.54                        |

## 7.2 System Validation

**Table 9: System Validation**

| Measurement is made at temperature 23.3 °C, relative humidity 47%, input power 250 mW.<br>Liquid temperature during the test: 22.6°C |           |                     |                         |                          |                             |
|--------------------------------------------------------------------------------------------------------------------------------------|-----------|---------------------|-------------------------|--------------------------|-----------------------------|
| Liquid parameters                                                                                                                    |           | Frequency           | Permittivity $\epsilon$ |                          | Conductivity $\sigma$ (S/m) |
|                                                                                                                                      |           | 1900 MHz            | 40.1                    |                          | 1.41                        |
| Verification results                                                                                                                 | Frequency | Target value (W/kg) |                         | Measurement value (W/kg) |                             |
|                                                                                                                                      |           | 10 g Average        | 1 g Average             | 10 g Average             | 1 g Average                 |
|                                                                                                                                      | 1900 MHz  | 5.31                | 10.1                    | 4.91                     | 9.8                         |

## 7.3 Summary of Measurement Results (Head, PCS 1900 MHz Band)

**Table 10: SAR Values (PCS 1900 MHz Band, head)**

| Temperature: 22 °C, humidity: 50%.<br>Liquid temperature during the test: 22.2°C |                              |                |                                                       |
|----------------------------------------------------------------------------------|------------------------------|----------------|-------------------------------------------------------|
| Limit of SAR (W/kg)                                                              | 10 g<br>Average              | 1 g<br>Average | Conducted Power<br>before/after each<br>test<br>(dBm) |
|                                                                                  | 2.0                          | 1.6            |                                                       |
| Test Case                                                                        | Measurement Result<br>(W/kg) |                |                                                       |
|                                                                                  | 10 g<br>Average              | 1 g<br>Average |                                                       |
| Left hand, Touch cheek, Top frequency                                            | 0.484                        | 0.888          | 29.41/29.52                                           |
| Left hand, Touch cheek, Mid frequency                                            | 0.473                        | 0.867          | 29.88/29.79                                           |
| Left hand, Touch cheek, Bottom frequency                                         | 0.497                        | 0.900          | 29.68/29.72                                           |
| Left hand, Tilt 15 Degree, Top frequency                                         | 0.526                        | 0.958          | 29.42/29.38                                           |
| Left hand, Tilt 15 Degree, Mid frequency                                         | 0.518                        | 0.931          | 29.79/29.87                                           |

**Telecommunication Metrology Center  
of Ministry of Information Industry**

No. SAR2005001

Page 14 of 60

|                                              |       |       |                    |
|----------------------------------------------|-------|-------|--------------------|
| Left hand, Tilt 15 Degree, Bottom frequency  | 0.550 | 0.980 | <b>29.53/29.65</b> |
| Right hand, Touch cheek, Top frequency       | 0.529 | 1.04  | <b>29.45/29.41</b> |
| Right hand, Touch cheek, Mid frequency       | 0.481 | 0.933 | <b>29.66/29.52</b> |
| Right hand, Touch cheek, Bottom frequency    | 0.490 | 0.941 | <b>29.87/29.68</b> |
| Right hand, Tilt 15 Degree, Top frequency    | 0.626 | 1.25  | <b>29.54/29.46</b> |
| Right hand, Tilt 15 Degree, Mid frequency    | 0.554 | 1.1   | <b>29.90/29.96</b> |
| Right hand, Tilt 15 Degree, Bottom frequency | 0.554 | 1.1   | <b>29.74/29.72</b> |

#### 7.4 Summary of Measurement Results (Body-Worn, PCS 1900 MHz Band)

**Table 11: SAR Values (PCS 1900 MHz Band, body-worn)**

| Temperature: 22 °C, humidity: 50%.                      |                              |                |                                                       |
|---------------------------------------------------------|------------------------------|----------------|-------------------------------------------------------|
| Liquid temperature during the test: 22.2°C              |                              |                |                                                       |
| Limit of SAR (W/kg)                                     | 10 g<br>Average              | 1 g<br>Average | Conducted Power<br>before/after each<br>test<br>(dBm) |
|                                                         | 2.0                          | 1.6            |                                                       |
| Test Case                                               | Measurement Result<br>(W/kg) |                |                                                       |
|                                                         | 10 g<br>Average              | 1 g<br>Average |                                                       |
| Display of EUT towards the phantom, Top<br>Frequency    | 0.177                        | 0.283          | 29.31/29.55                                           |
| Display of EUT towards the phantom, Mid<br>Frequency    | 0.190                        | 0.301          | 29.89/29.88                                           |
| Display of EUT towards the phantom, Bottom<br>Frequency | 0.209                        | 0.330          | 29.47/29.36                                           |
| Display of EUT towards the ground, Top<br>frequency     | 0.247                        | 0.392          | 29.71/29.42                                           |
| Display of EUT towards the ground, Mid<br>frequency     | 0.262                        | 0.417          | 29.86/29.84                                           |

|                                                     |       |       |                    |
|-----------------------------------------------------|-------|-------|--------------------|
| Display of EUT towards the ground, Bottom frequency | 0.283 | 0.452 | <b>29.64/29.65</b> |
|-----------------------------------------------------|-------|-------|--------------------|

## 7.5 Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

## 8 Measurement Uncertainty

| No.                      | Error source                                    | Type | Uncertainty Value (%) | Probability Distribution | k          | $c_i$        | Standard Uncertainty (%) $u_i$ (%) | Degree of freedom $V_{eff}$ or $v_i$ |
|--------------------------|-------------------------------------------------|------|-----------------------|--------------------------|------------|--------------|------------------------------------|--------------------------------------|
| 1                        | System repetivity                               | A    | 0.5                   | N                        | 1          | 1            | 0.5                                | 9                                    |
| Measurement system       |                                                 |      |                       |                          |            |              |                                    |                                      |
| 2                        | - probe calibration                             | B    | 7                     | N                        | 2          | 1            | 3.5                                | $\infty$                             |
| 3                        | - axial isotropy of the probe                   | B    | 4.7                   | R                        | $\sqrt{3}$ | $\sqrt{0.5}$ | 4.3                                | $\infty$                             |
| 4                        | - hemisphere isotropy of the probe              | B    | 9.4                   | R                        | $\sqrt{3}$ | $\sqrt{0.5}$ |                                    |                                      |
| 5                        | - spatial resolution                            | B    | 0                     | R                        | $\sqrt{3}$ | 1            | 0                                  | $\infty$                             |
| 6                        | - boundary effect                               | B    | 11.0                  | R                        | $\sqrt{3}$ | 1            | 6.4                                | $\infty$                             |
| 7                        | - probe linearity                               | B    | 4.7                   | R                        | $\sqrt{3}$ | 1            | 2.7                                | $\infty$                             |
| 8                        | - detection limit                               | B    | 1.0                   | R                        | $\sqrt{3}$ | 1            | 0.6                                | $\infty$                             |
| 9                        | - electronic readout                            | B    | 1.0                   | N                        | 1          | 1            | 1.0                                | $\infty$                             |
| 10                       | - RF interference                               | B    | 3.0                   | R                        | $\sqrt{3}$ | 1            | 1.73                               | $\infty$                             |
| 11                       | - probe mechanical positioning constraint       | B    | 0.4                   | R                        | $\sqrt{3}$ | 1            | 0.2                                | $\infty$                             |
| 12                       | - matching between probe and phantom references | B    | 2.9                   | R                        | $\sqrt{3}$ | 1            | 1.7                                | $\infty$                             |
| 13                       | - SAR interpolation and extrapolation           | B    | 3.9                   | R                        | $\sqrt{3}$ | 1            | 2.3                                | $\infty$                             |
| Uncertainties of the DUT |                                                 |      |                       |                          |            |              |                                    |                                      |
| 14                       | - position of the DUT                           | A    | 4.9                   | N                        | 1          | 1            | 4.9                                | 5                                    |

**Telecommunication Metrology Center  
of Ministry of Information Industry**

No. SAR2005001

Page 16 of 60

|                                                       |                                                  |                                             |      |   |            |     |      |          |
|-------------------------------------------------------|--------------------------------------------------|---------------------------------------------|------|---|------------|-----|------|----------|
| 15                                                    | - holder of the DUT                              | A                                           | 6.1  | N | 1          | 1   | 6.1  | 5        |
| 16                                                    | - drift of the output power                      | B                                           | 5.0  | R | $\sqrt{3}$ | 1   | 2.9  | $\infty$ |
| physical parameters                                   |                                                  |                                             |      |   |            |     |      |          |
| 17                                                    | - phantom shell                                  | B                                           | 1.0  | R | $\sqrt{3}$ | 1   | 0.6  | $\infty$ |
| 18                                                    | - liquid conductivity<br>(deviation from target) | B                                           | 5.0  | R | $\sqrt{3}$ | 0.6 | 1.7  | $\infty$ |
| 19                                                    | - liquid conductivity(measurement error)         | B                                           | 10.0 | R | $\sqrt{3}$ | 0.6 | 3.4  | $\infty$ |
| 20                                                    | - liquid permittivity(deviation from target)     | B                                           | 5.0  | R | $\sqrt{3}$ | 0.6 | 1.7  | $\infty$ |
| 21                                                    | - liquid permittivity(measurement error)         | B                                           | 5.0  | R | $\sqrt{3}$ | 0.6 | 1.7  | $\infty$ |
| Combined standard uncertainty                         |                                                  | $u'_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$ |      |   |            |     | 13.5 | 88.7     |
| Expanded uncertainty<br>(confidence interval of 95 %) |                                                  | $u_e = 2u_c$                                |      | N | k=2        |     | 27   |          |

## 9 MAIN TEST INSTRUMENTS

**Table 13: List of Main Instruments**

| No. | Name                   | Type           | Serial Number | Calibration Date         | Valid Period |
|-----|------------------------|----------------|---------------|--------------------------|--------------|
| 01  | Network analyzer       | HP 8753C       | 3146A01905    | August 18,2003           | One year     |
| 02  | Dielectric Probe Kit   | Agilent 85070C | US99360113    | No Calibration Requested |              |
| 03  | Power meter            | HP 436A        | 2101A11858    | August 19,2003           | One year     |
| 04  | Power sensor           | HP 8481H       | 2349A07289    |                          |              |
| 05  | Signal Generator       | MG 3633A       | M73386        | No Calibration Requested |              |
| 06  | Amplifier              | AT 50S1G4A     | 26549         | No Calibration Requested |              |
| 07  | Validation Kit 835MHz  | SPEAG D 835V2  | 443           | September 3, 2003        | Two years    |
| 08  | Validation Kit 900MHz  | SPEAG D 900V2  | 125           | September 3, 2003        | Two years    |
| 09  | Validation Kit 1800MHz | SPEAG D 1800V2 | 2d010         | September 3, 2003        | Two years    |
| 10  | Validation Kit 1900MHz | 1900 V2        | 541           | September 3, 2003        | Two years    |
| 11  | BTS                    | CMU 200        | 100680        | September 13, 2003       | One year     |
| 12  | E-field Probe          | SPEAG ET3DV6   | 1738          | December 9, 2002         | Two years    |
| 13  | DAE                    | SPEAG DAE3     | 589           | October 21 2003          | Two years    |

## **10 TEST PERIOD**

The test is performed from January 4, 2005 to January 5, 2005.

## **11 TEST LOCATION**

The test is performed at  
Radio Communication & Electromagnetic Compatibility Laboratory of  
Telecommunication Metrology Center of  
Ministry of Information Industry of  
The People's Republic of China

**\*\*\*END OF REPORT BODY\*\*\***

## **ANNEX A : MEASUREMENT PROCESS**

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point was measured and was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20 mm x 20 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point, a volume of 32 mm x 32 mm x 34 mm was assessed by measuring 7 x 7x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.

c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.

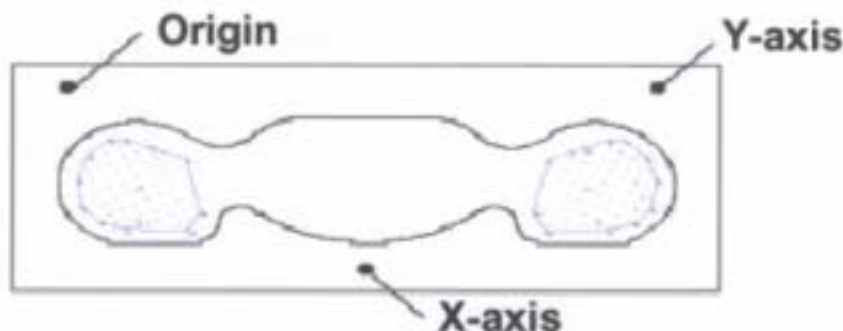


Figure 2 SAR Measurement Points in Area Scan

**ANNEX B : TEST LAYOUT**



Picture 1 Specific Absorption Rate Test Layout



Picture 2 Left Hand Touch Cheek Position



Picture 3 Left Hand Tilt 15° Position



Picture 4 Right Hand Touch Cheek Position




Picture 5 Right Hand Tilt 15° Position




Picture 6 Flat Phantom -- Body-worn Position (toward phantom, the distance from handset to the bottom of the Phantom is 1.5cm)



Picture 7 Flat Phantom -- Body-worn Position (toward ground, the distance from handset to the bottom of the Phantom is 1.5cm)

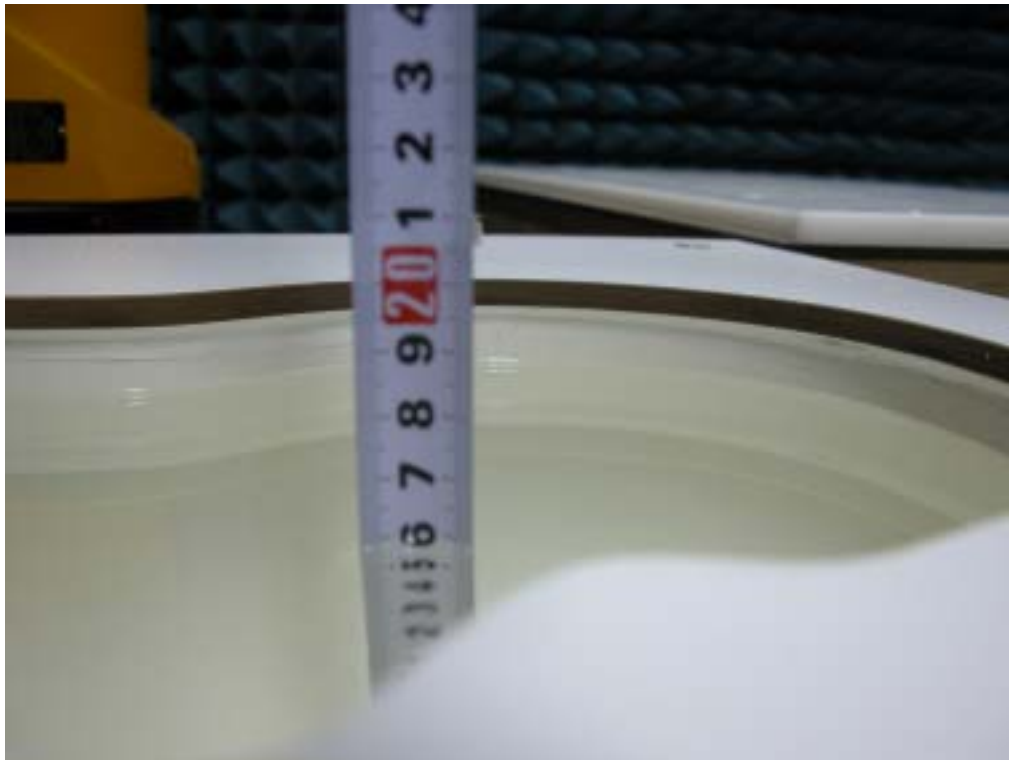

Picture 8 Liquid depth in the Head Phantom (Head, 1900MHz)

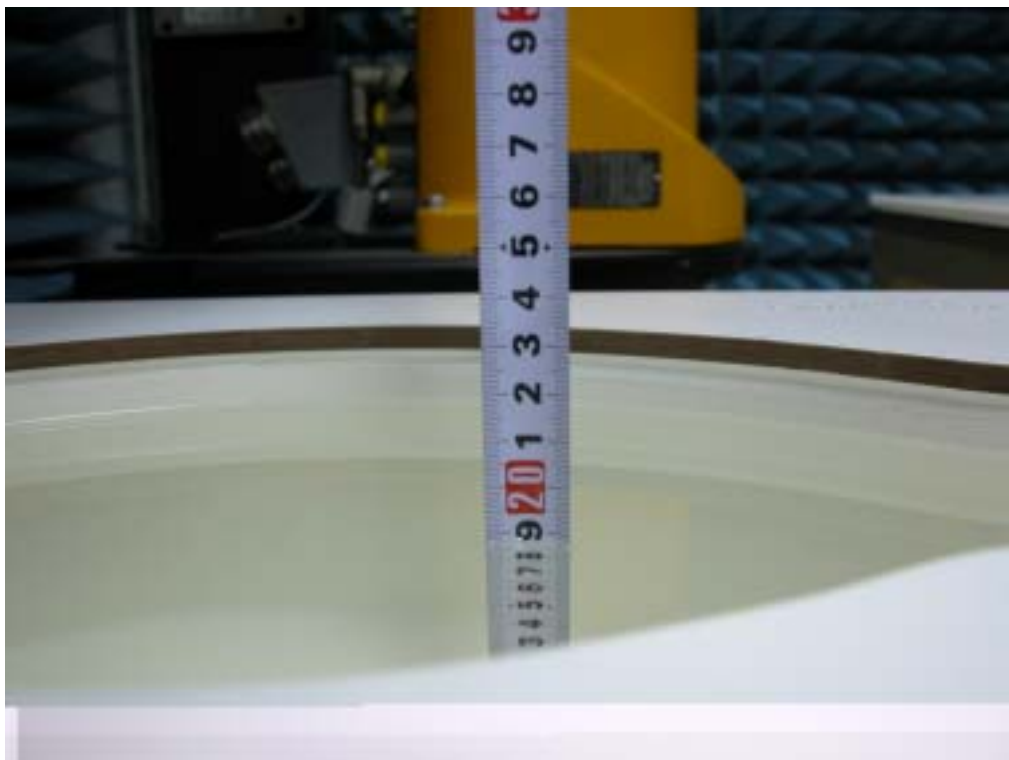

Picture 9 Liquid depth in the Flat Phantom (Body 1900MHz)

## ANNEX C: GRAPH RESULTS

### 1900 Left Cheek Low

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek Low/Area Scan (51x81x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 25.7 V/m; Power Drift = -0.006 dB

Maximum value of SAR (interpolated) = 0.996 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.7 V/m; Power Drift = -0.006 dB

Maximum value of SAR (measured) = 0.934 mW/g

Peak SAR (extrapolated) = 1.62 W/kg

**SAR(1 g) = 0.900 mW/g; SAR(10 g) = 0.497 mW/g**

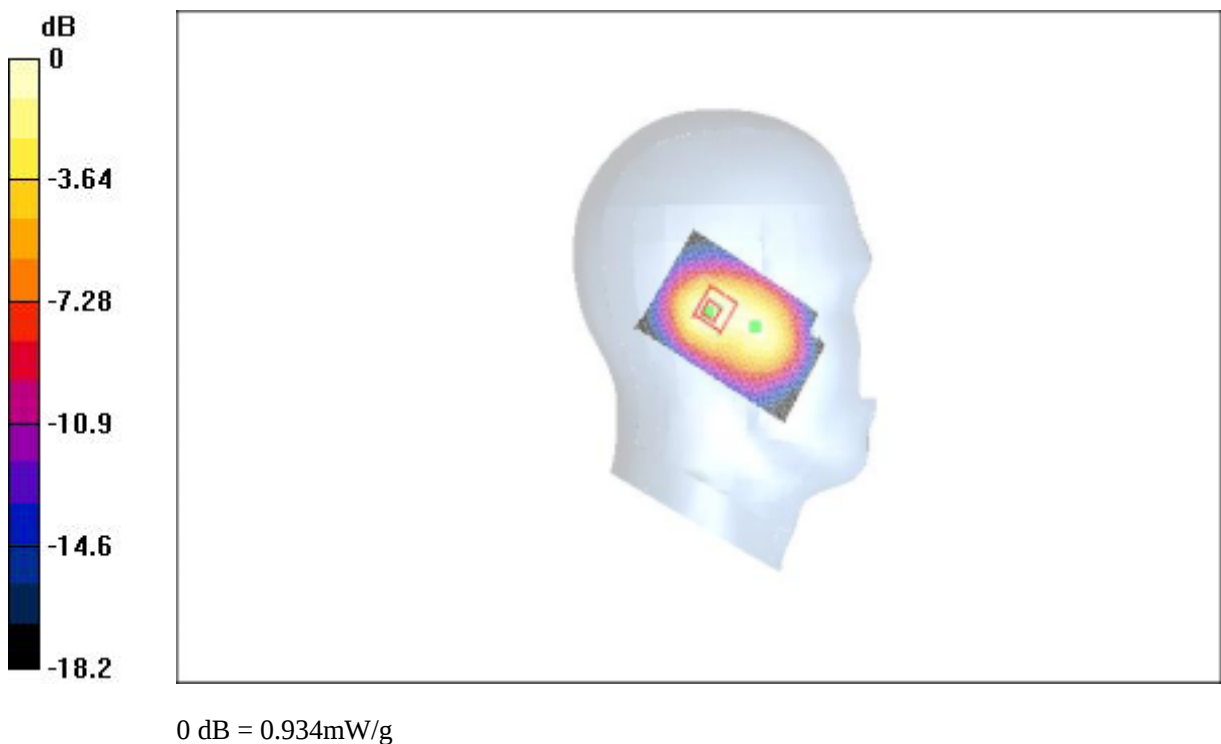


Fig. 1 Left Hand Touch Cheek 1900MHz CH512

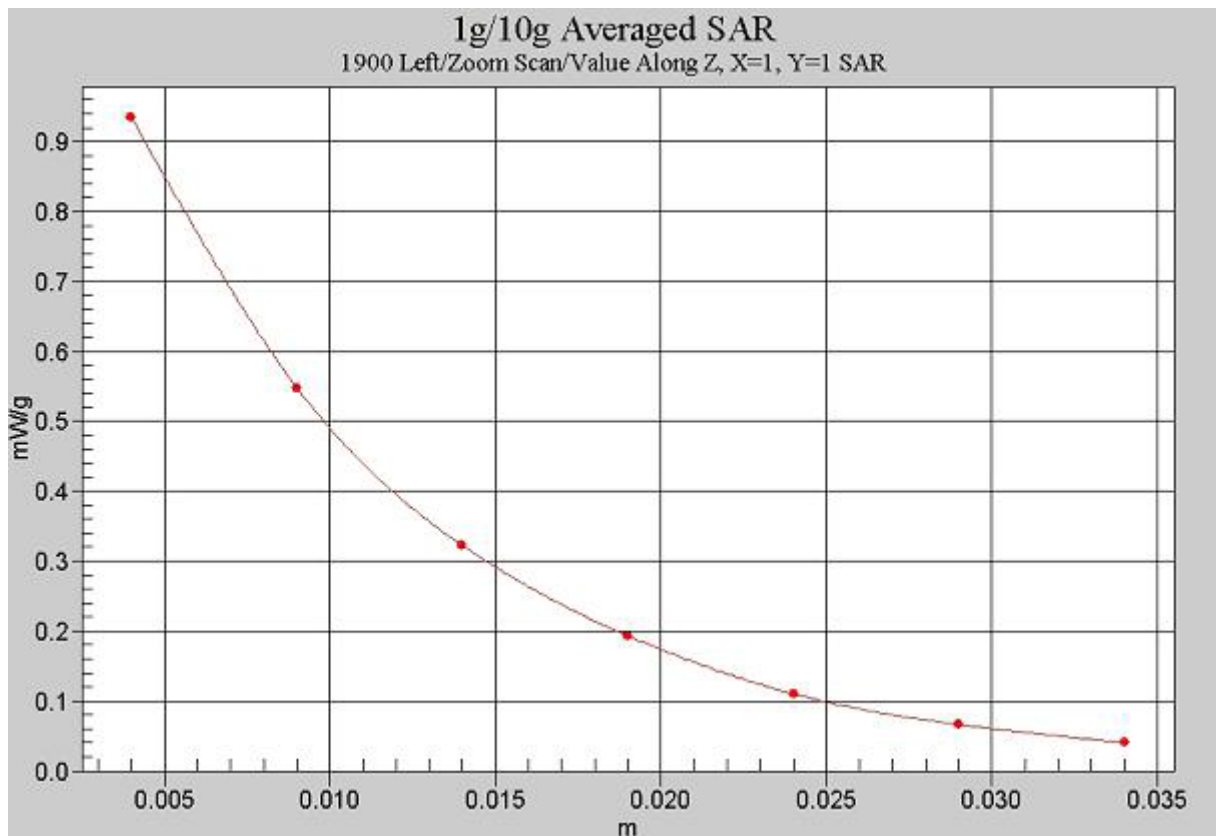


Fig. 2 Z-Scan at power reference point (Left Hand Touch Cheek 1900MHz CH512)

**PCS 1900 Left Cheek Middle**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek Middle/Area Scan (51x81x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 24.9 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.975 mW/g


**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.9 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 0.902 mW/g

Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 0.867 mW/g; SAR(10 g) = 0.473 mW/g**

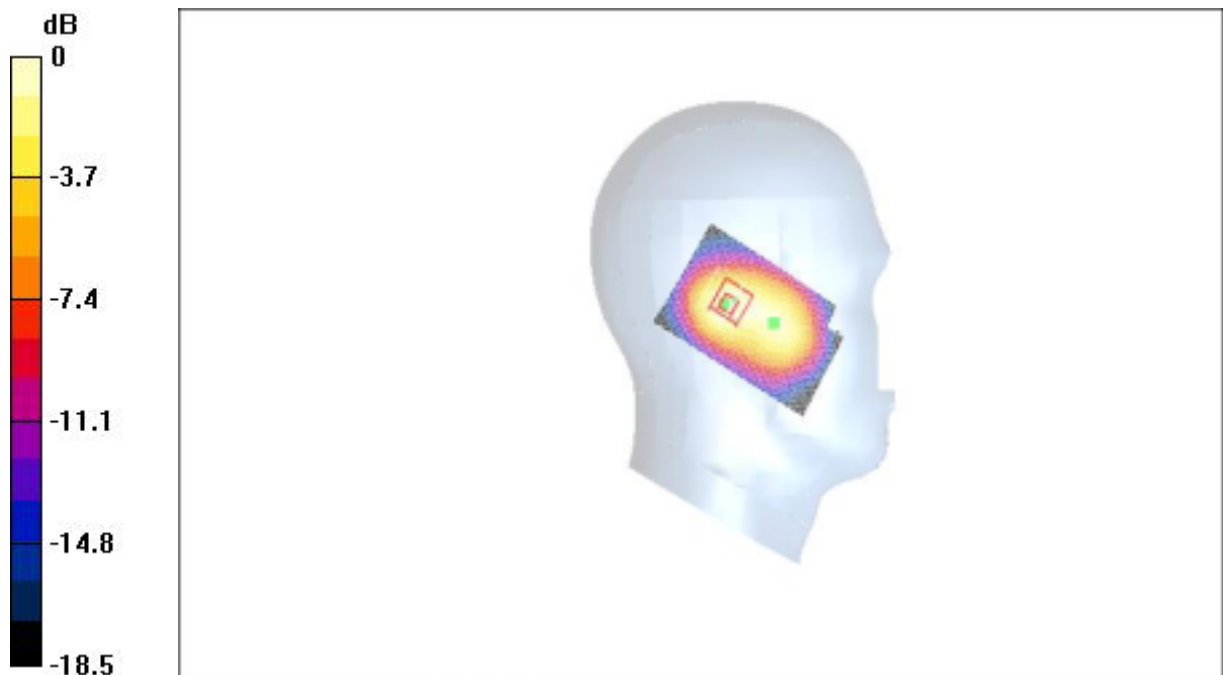

0 dB = 0.902mW/g

**Fig. 3 Left Hand Touch Cheek 1900MHz CH661**

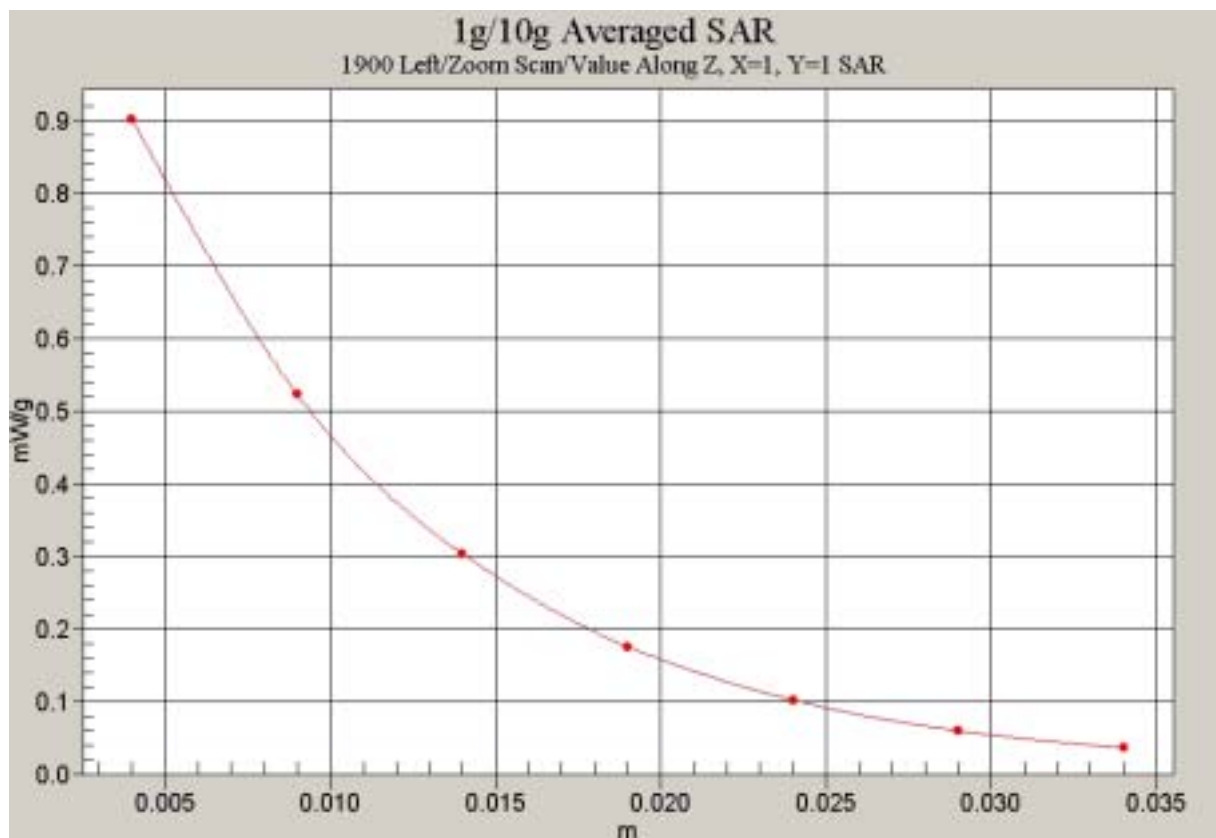


Fig. 4 Z-Scan at power reference point (Left Hand Touch Cheek 1900MHz CH661)

**PCS 1900 Left Cheek High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek High/Area Scan (51x81x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 25.2 V/m; Power Drift = 0.2 dB

Maximum value of SAR (interpolated) = 1.01 mW/g


**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.2 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.921 mW/g

Peak SAR (extrapolated) = 1.6 W/kg

**SAR(1 g) = 0.888 mW/g; SAR(10 g) = 0.484 mW/g**

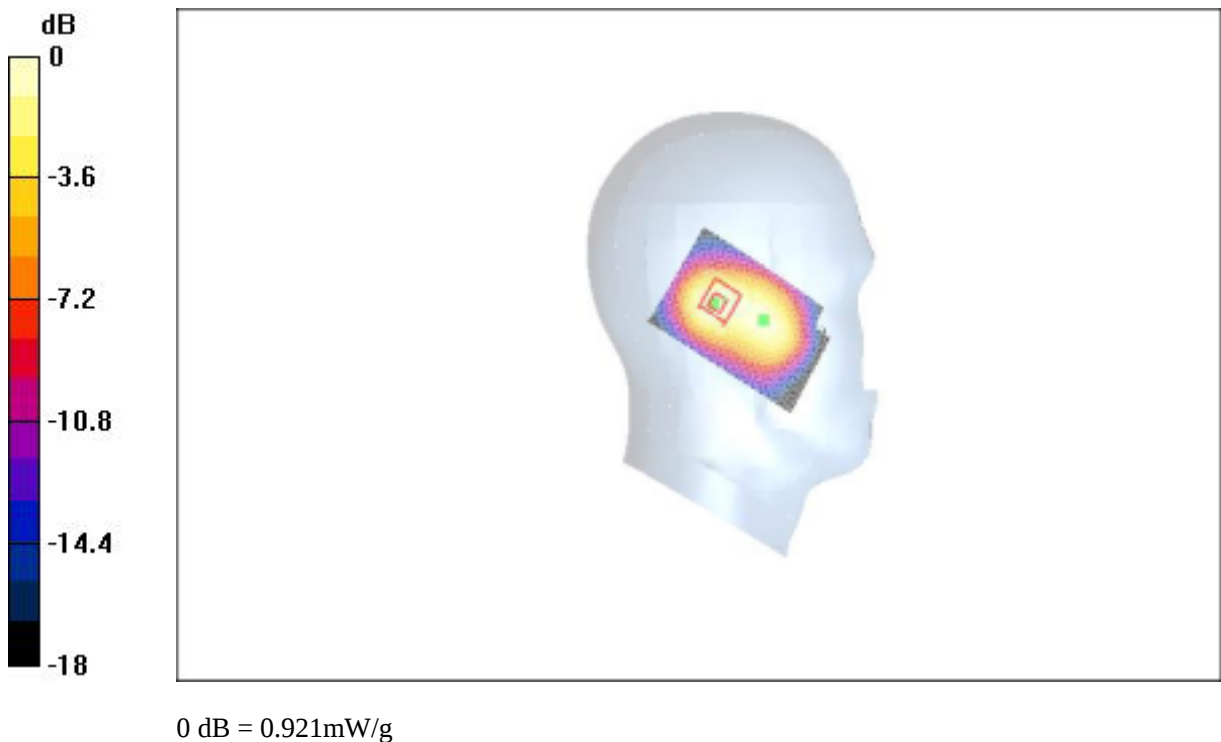

**Fig. 5 Left Hand Touch Cheek 1900MHz CH810**

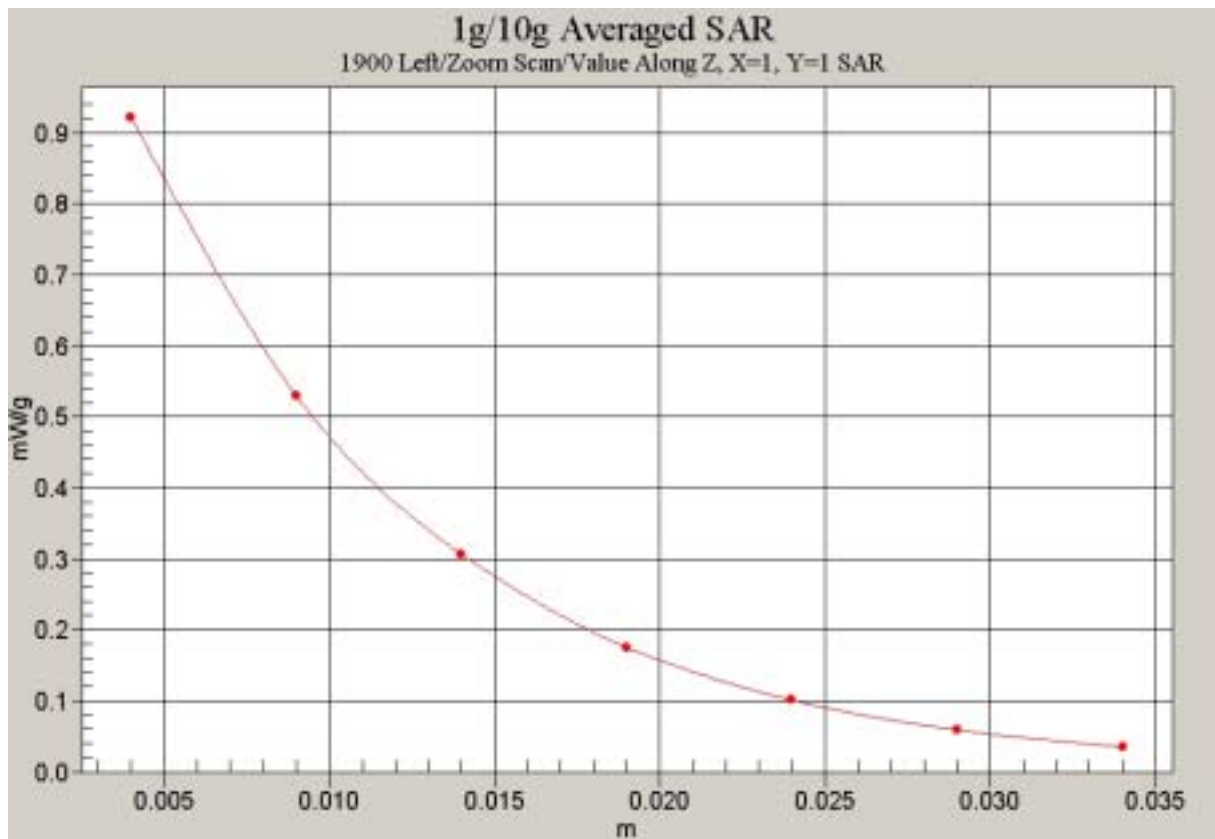


Fig. 6 Z-Scan at power reference point (Left Hand Touch Cheek 1900MHz CH810)

**PCS 1900 Left Tilt Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt Low/Area Scan (51x81x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 28 V/m; Power Drift = -0.008 dB

Maximum value of SAR (interpolated) = 1.12 mW/g


**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28 V/m; Power Drift = -0.008 dB

Maximum value of SAR (measured) = 1.02 mW/g

Peak SAR (extrapolated) = 1.7 W/kg

**SAR(1 g) = 0.980 mW/g; SAR(10 g) = 0.550 mW/g**

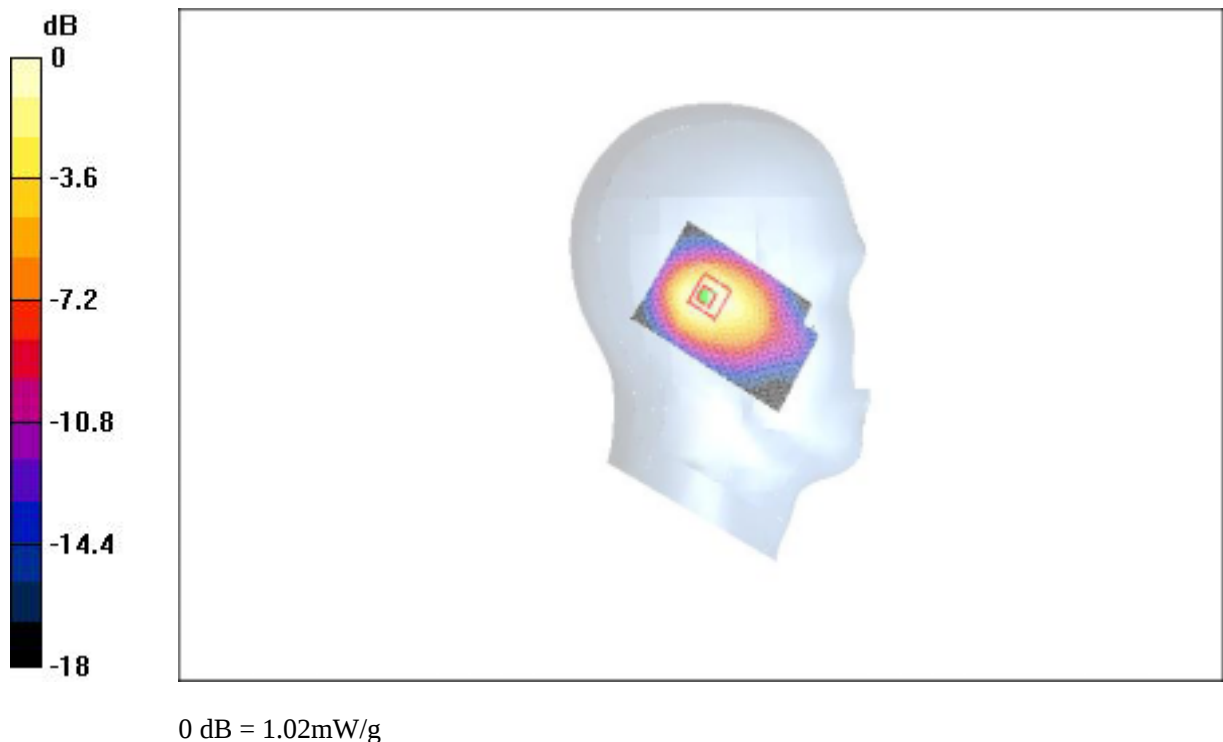

**Fig. 7 Left Hand Tilt 15° 1900MHz CH512**

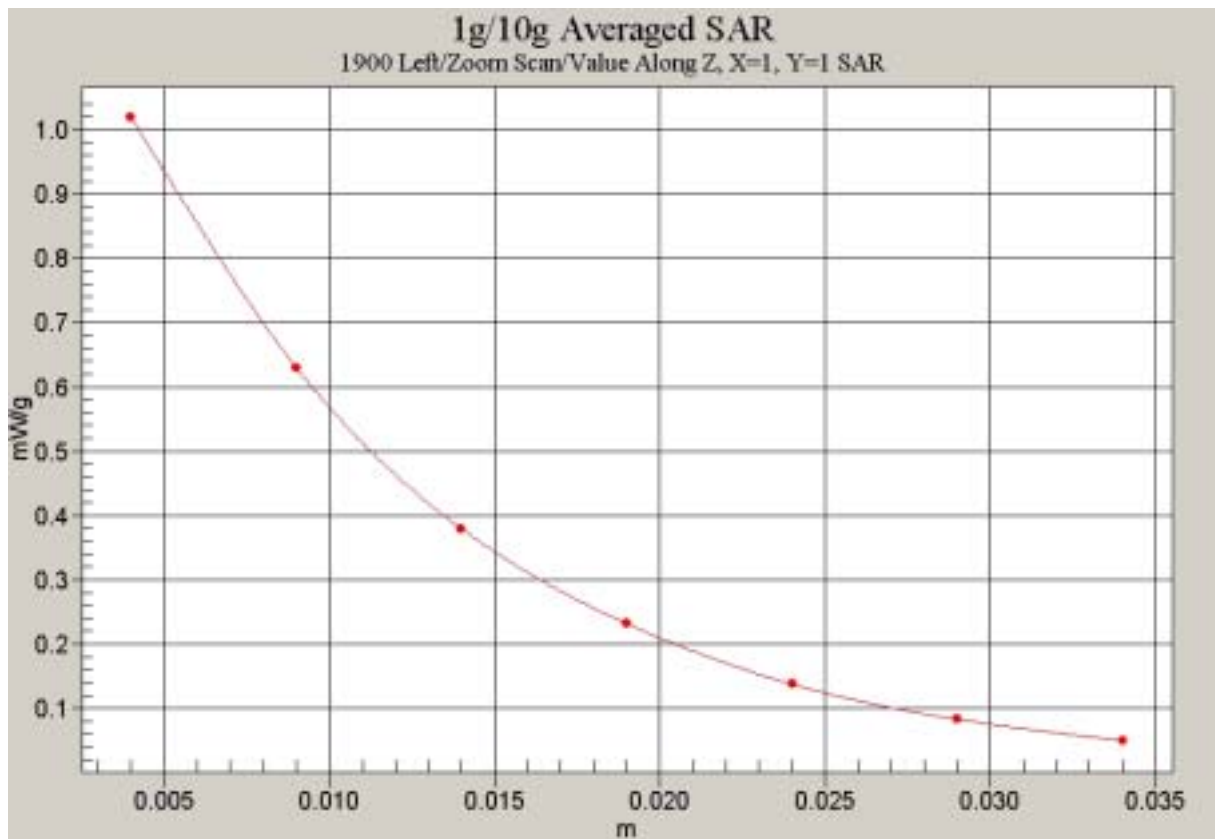


Fig. 8 Z-Scan at power reference point (Left Hand Tilt 15° 1900MHz CH512)

**PCS 1900 Left Tilt Middle**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt Middle/Area Scan (51x81x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 27.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 1.08 mW/g


**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.941 mW/g

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.931 mW/g; SAR(10 g) = 0.518 mW/g**

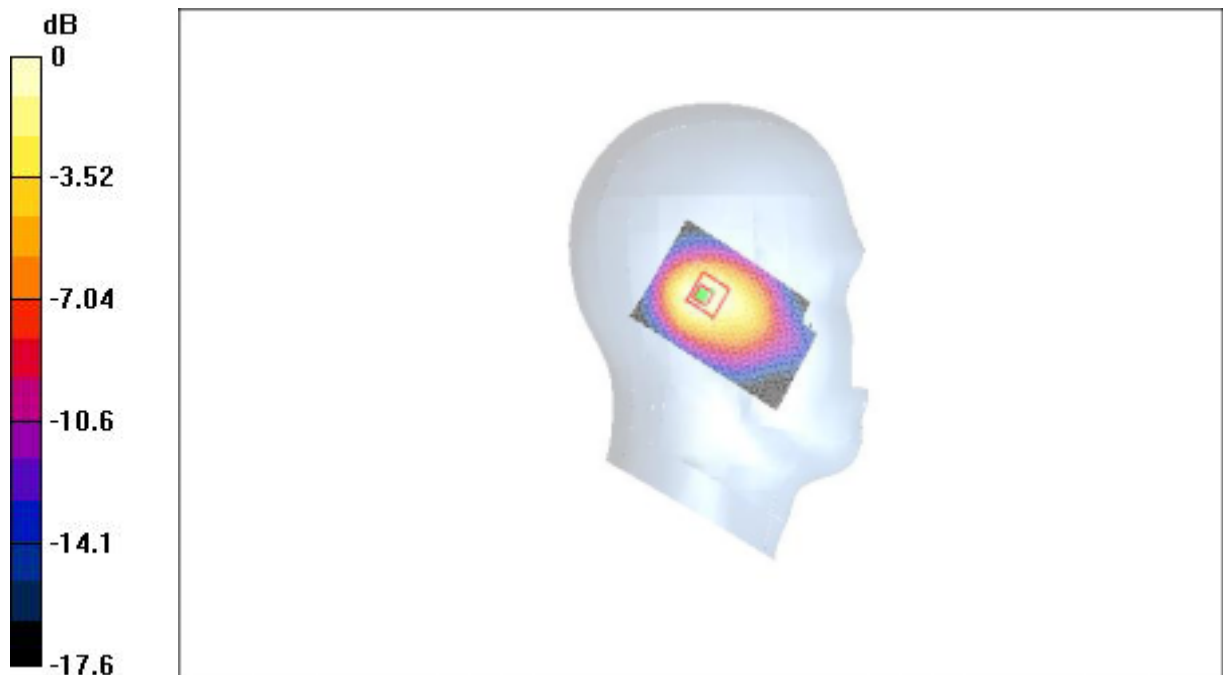

0 dB = 0.941mW/g

**Fig. 9 Left Hand Tilt 15° 1900MHz CH661**

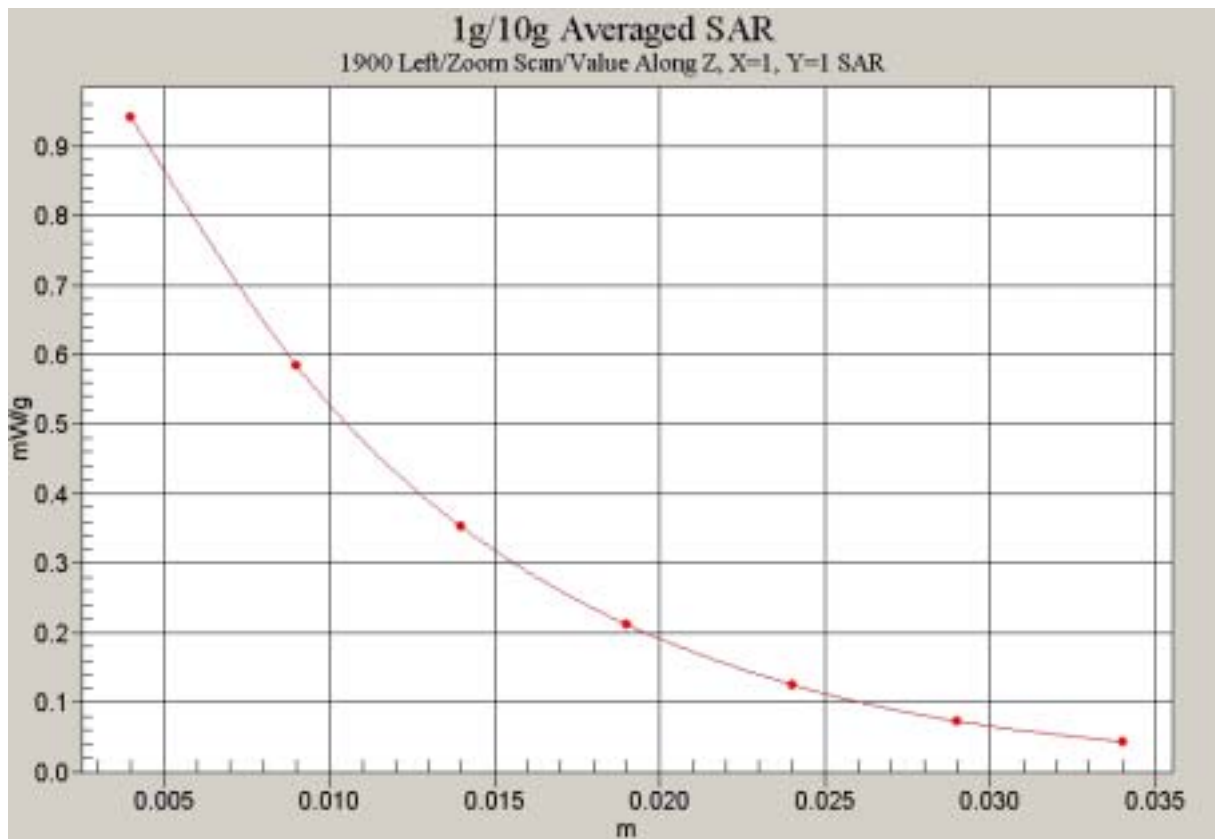


Fig. 10 Z-Scan at power reference point (Left Hand Tilt 15° 1900MHz CH661)

**PCS 1900 Left Tilt High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt High/Area Scan (51x81x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 27.2 V/m; Power Drift = -0.0009 dB

Maximum value of SAR (interpolated) = 1.11 mW/g


**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.2 V/m; Power Drift = -0.0009 dB

Maximum value of SAR (measured) = 0.993 mW/g

Peak SAR (extrapolated) = 1.72 W/kg

**SAR(1 g) = 0.958 mW/g; SAR(10 g) = 0.526 mW/g**

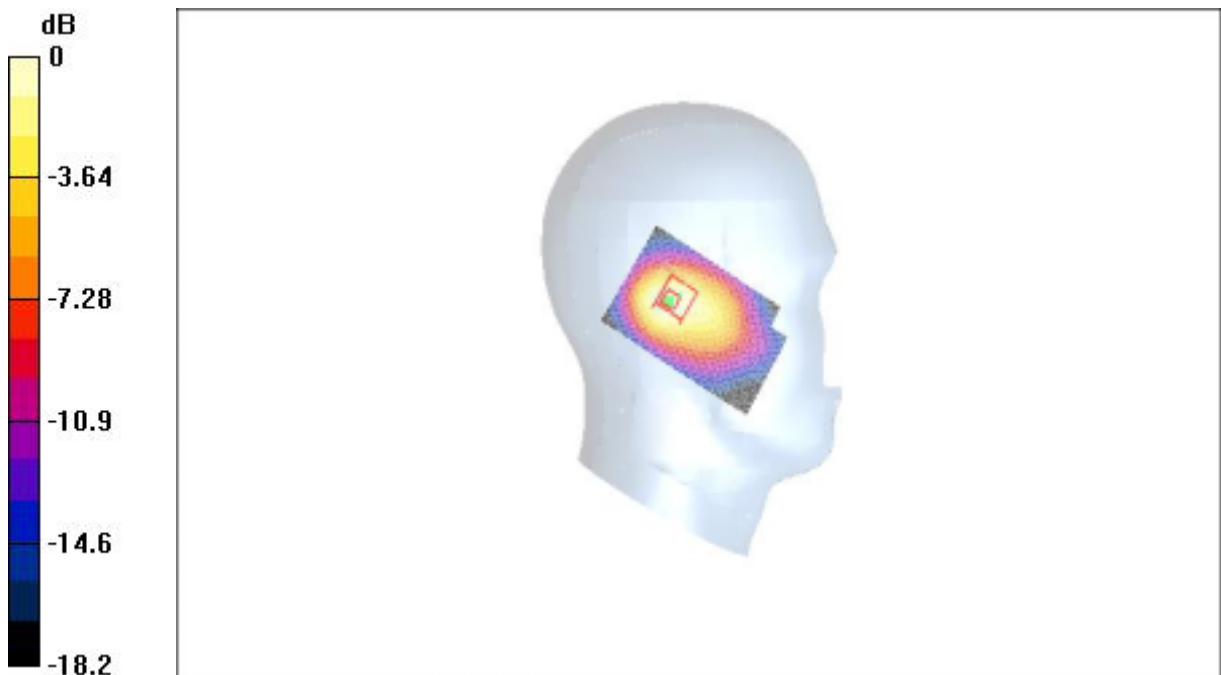

0 dB = 0.993mW/g

**Fig. 11 Left Hand Tilt 15° 1900MHz CH810**

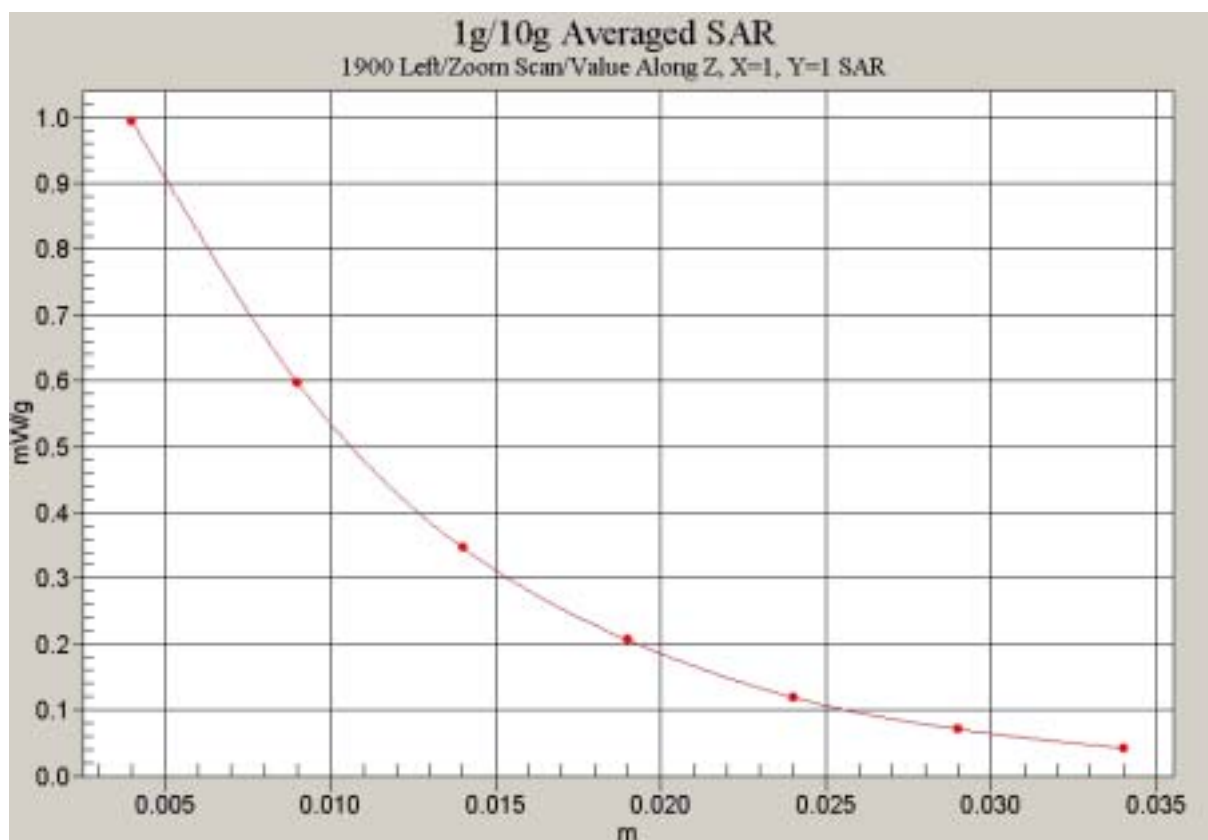


Fig. 12 Z-Scan at power reference point (left Hand Tilt 15° 1900MHz CH810)

**PCS 1900 Right Cheek Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek Low/Area Scan (51x81x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 22 V/m; Power Drift = -0.004 dB

Maximum value of SAR (interpolated) = 1.06 mW/g


**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22 V/m; Power Drift = -0.004 dB

Maximum value of SAR (measured) = 0.929 mW/g

Peak SAR (extrapolated) = 1.78 W/kg

**SAR(1 g) = 0.941 mW/g; SAR(10 g) = 0.490 mW/g**

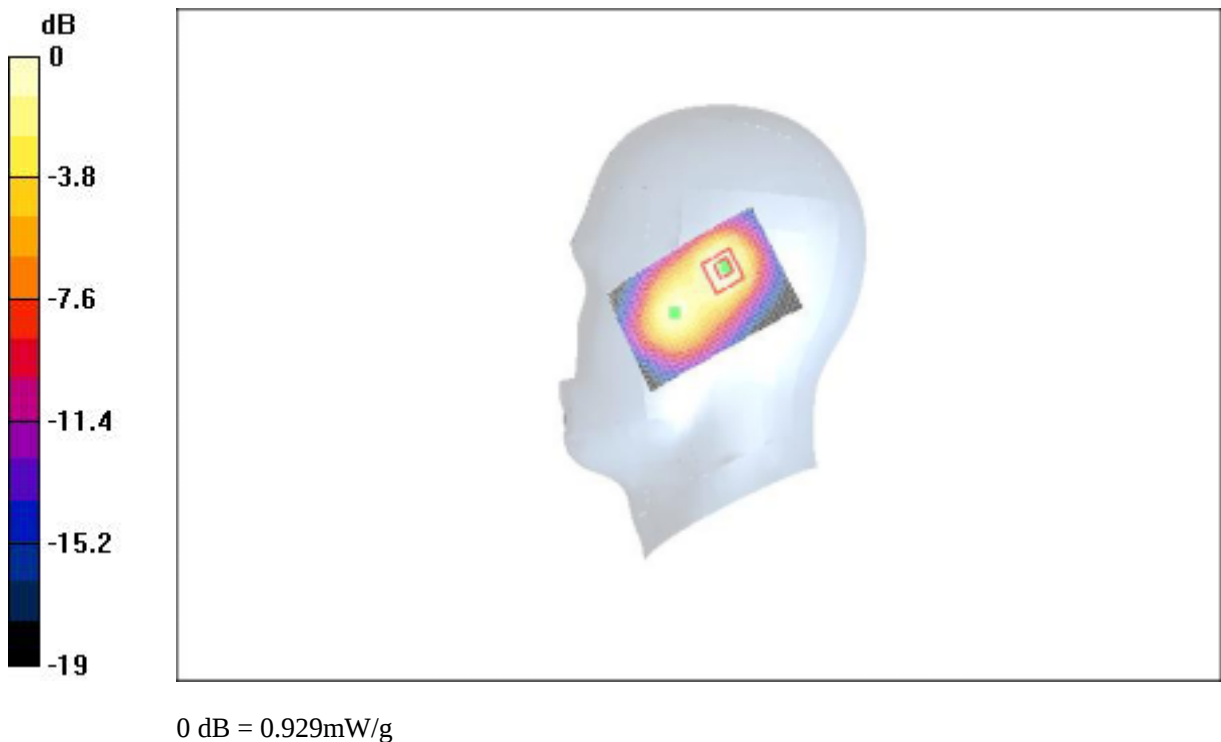

**Fig. 13 Right Hand Touch Cheek 1900MHz CH512**

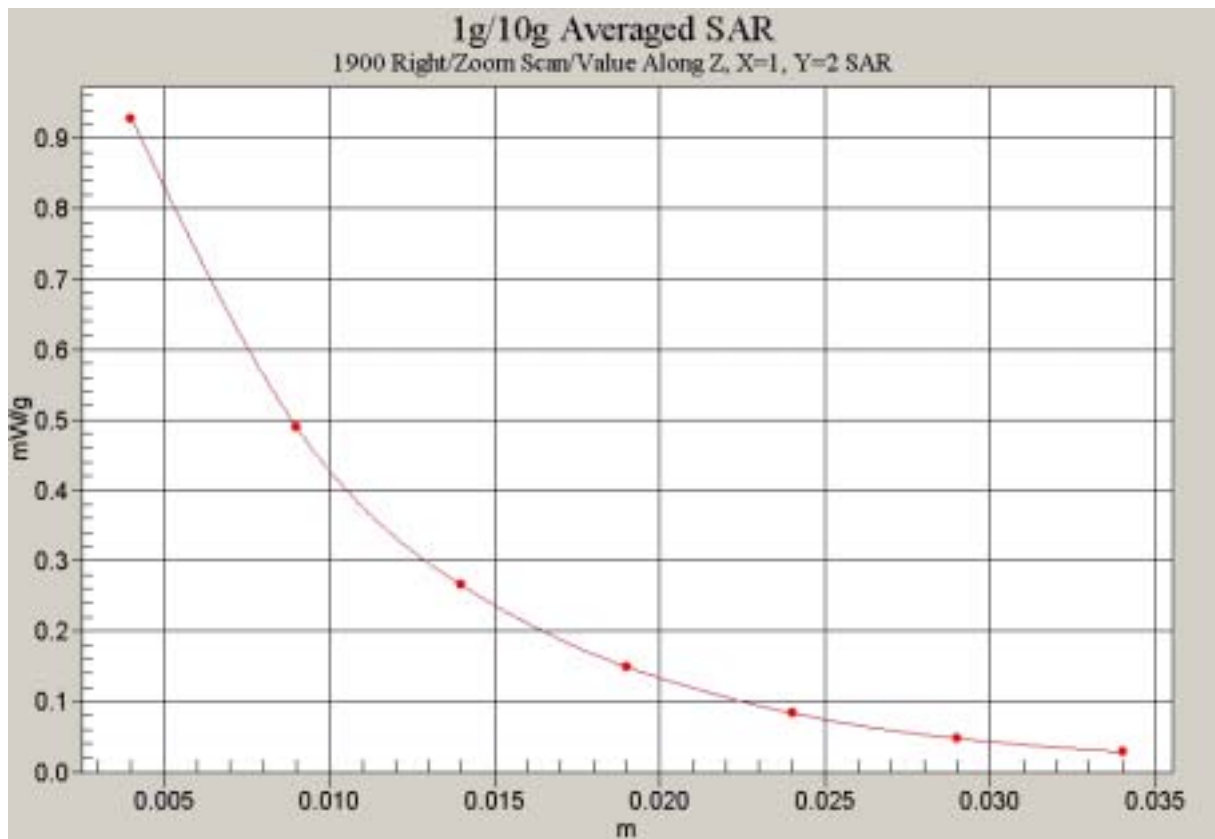


Fig. 14 Z-Scan at power reference point (Right Hand Touch Cheek 1800MHz CH512)

**PCS 1900 Right Cheek Middle**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek Middle/Area Scan (51x81x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 21.4 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 1.04 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.4 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.906 mW/g

Peak SAR (extrapolated) = 1.81 W/kg

**SAR(1 g) = 0.933 mW/g; SAR(10 g) = 0.481 mW/g**



0 dB = 0.906mW/g

**Fig. 15 Right Hand Touch Cheek 1900MHz CH661**

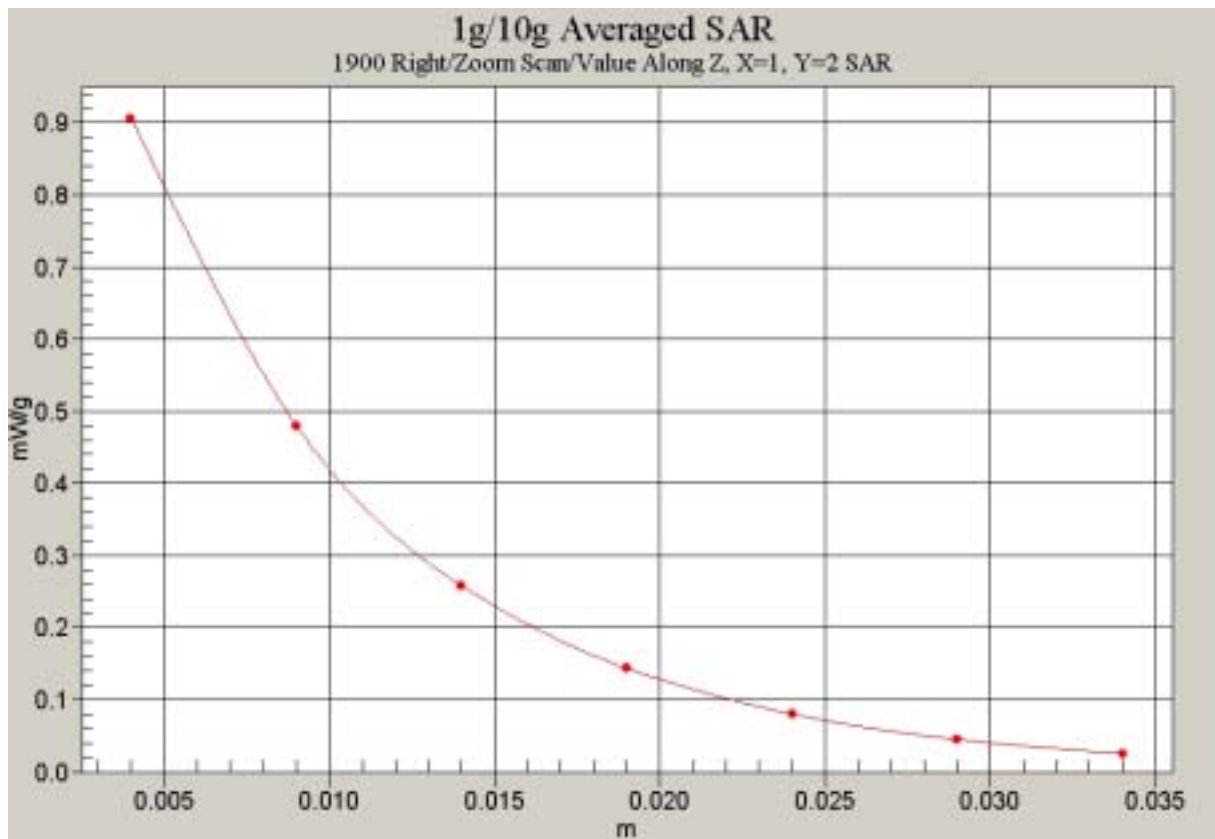


Fig. 16 Z-Scan at power reference point (Right Hand Touch Cheek 1900MHz CH661)

**PCS 1900 Right Cheek High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek High/Area Scan (51x81x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 22.1 V/m; Power Drift = 0.006 dB

Maximum value of SAR (interpolated) = 1.15 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.1 V/m; Power Drift = 0.006 dB

Maximum value of SAR (measured) = 1 mW/g

Peak SAR (extrapolated) = 2.04 W/kg

**SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.529 mW/g**

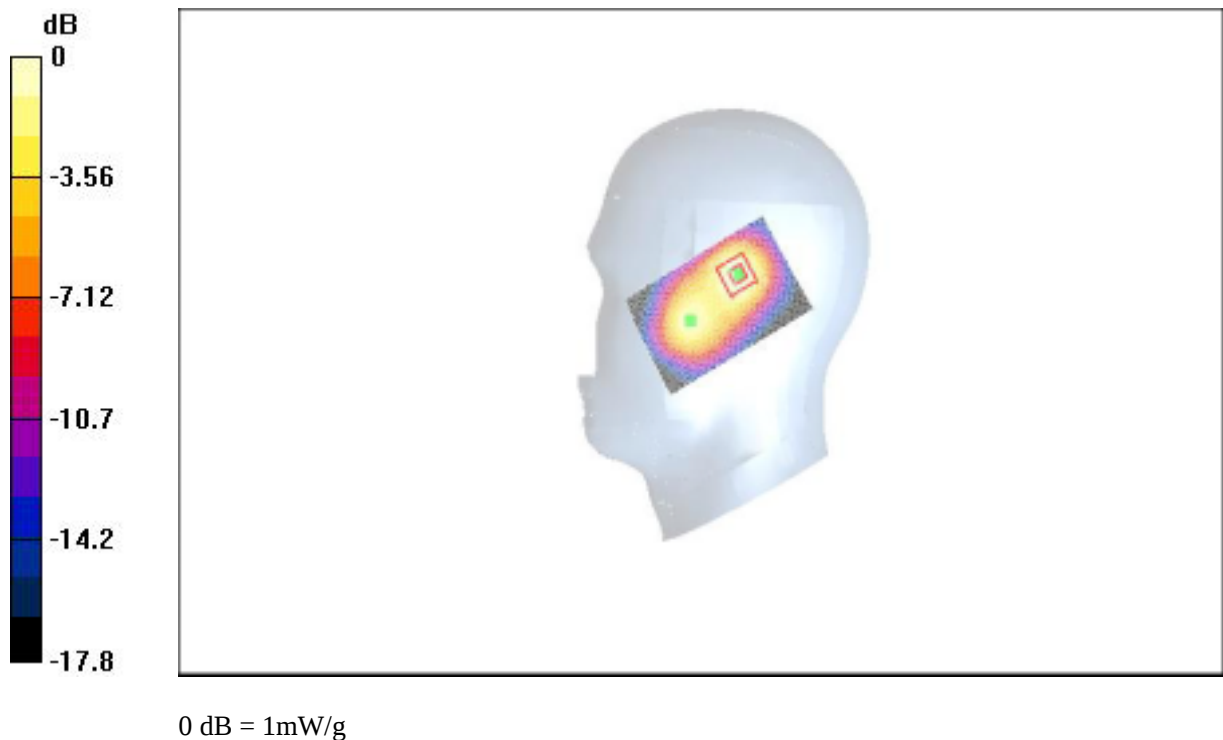


Fig. 17 Right Hand Touch Cheek 1900MHz CH810

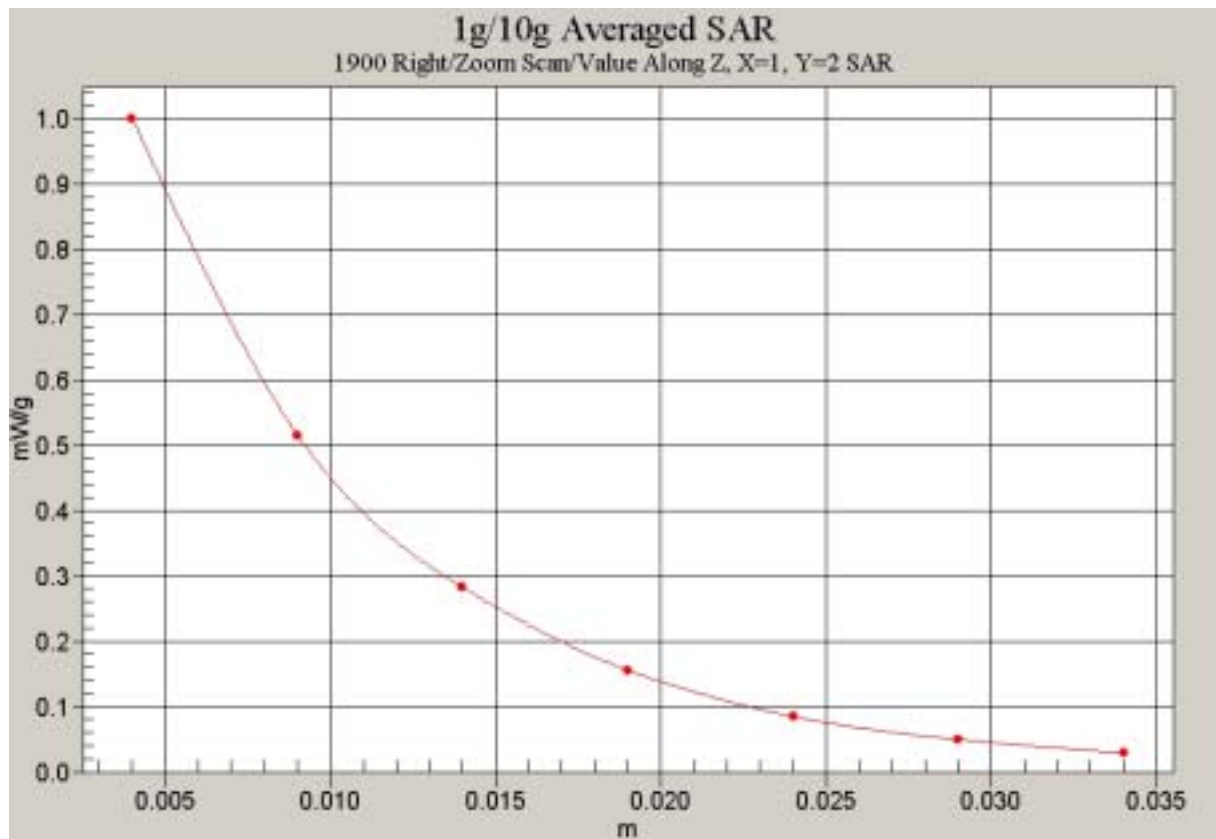


Fig. 18 Z-Scan at power reference point (Right Hand Touch Cheek 1900MHz CH810)

**PCS 1900 Right Tilt Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt Low/Area Scan (51x81x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 23.5 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 1.24 mW/g


**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.5 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.08 mW/g

Peak SAR (extrapolated) = 2.14 W/kg

**SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.554 mW/g**

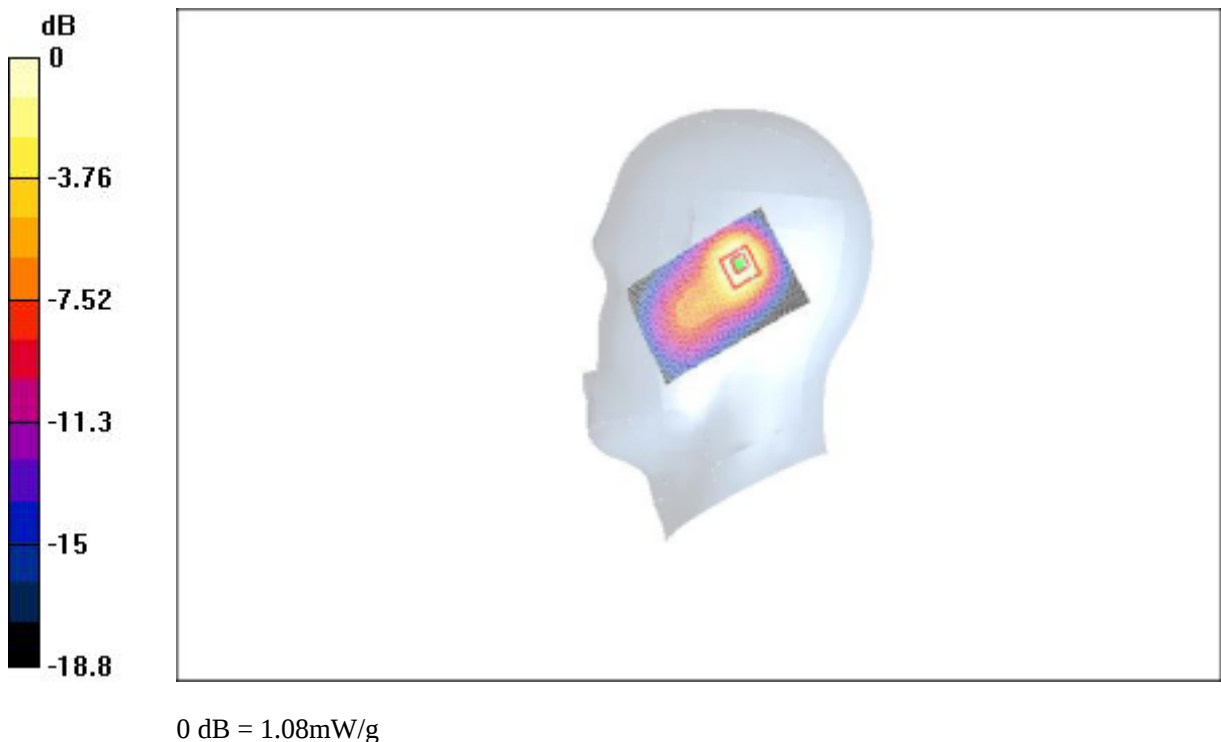

**Fig. 19 Right Hand Tilt 15° 1900MHz CH512**

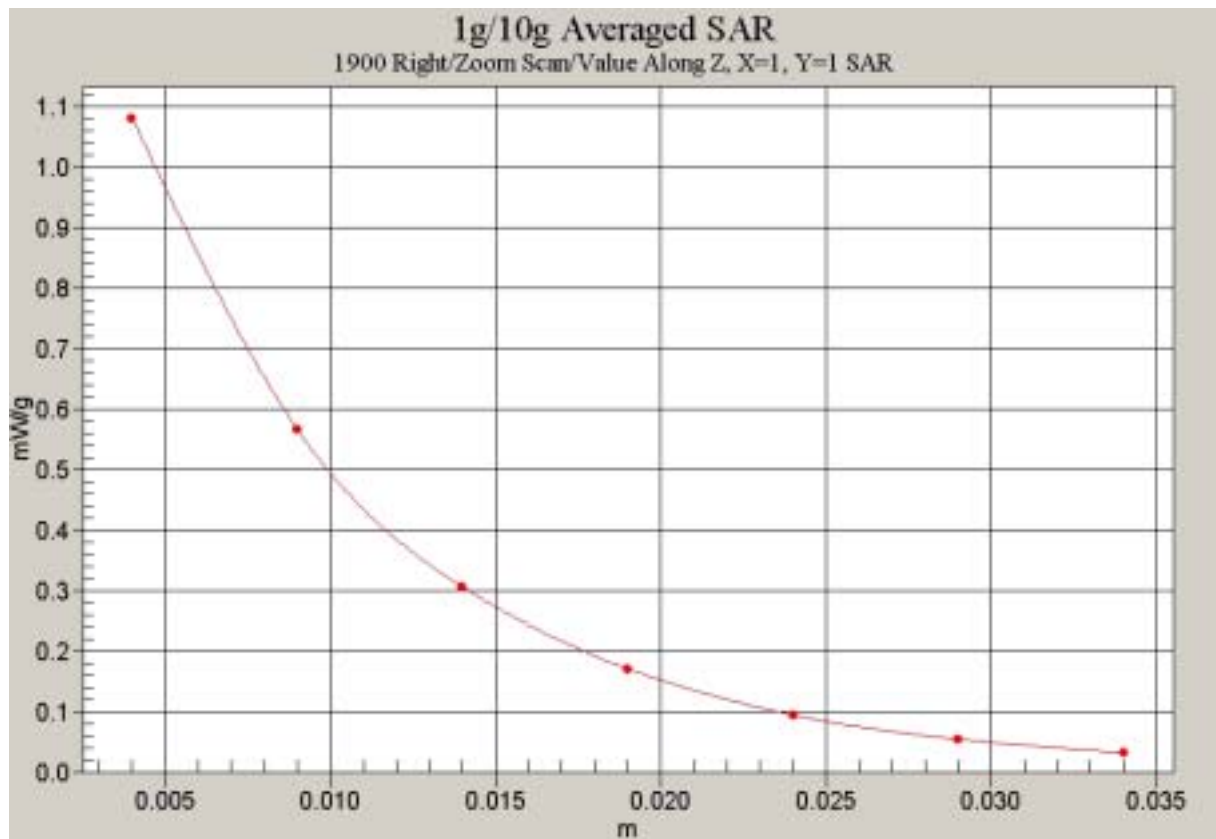


Fig. 20 Z-Scan at power reference point (Right Hand Tilt 15° 1900MHz CH512)

**PCS 1900 Right Tilt Middle**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt Middle/Area Scan (51x81x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 23.2 V/m; Power Drift = -0.01 dB

Maximum value of SAR (interpolated) = 1.22 mW/g


**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.2 V/m; Power Drift = -0.01 dB

Maximum value of SAR (measured) = 1.1 mW/g

Peak SAR (extrapolated) = 2.17 W/kg

**SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.554 mW/g**

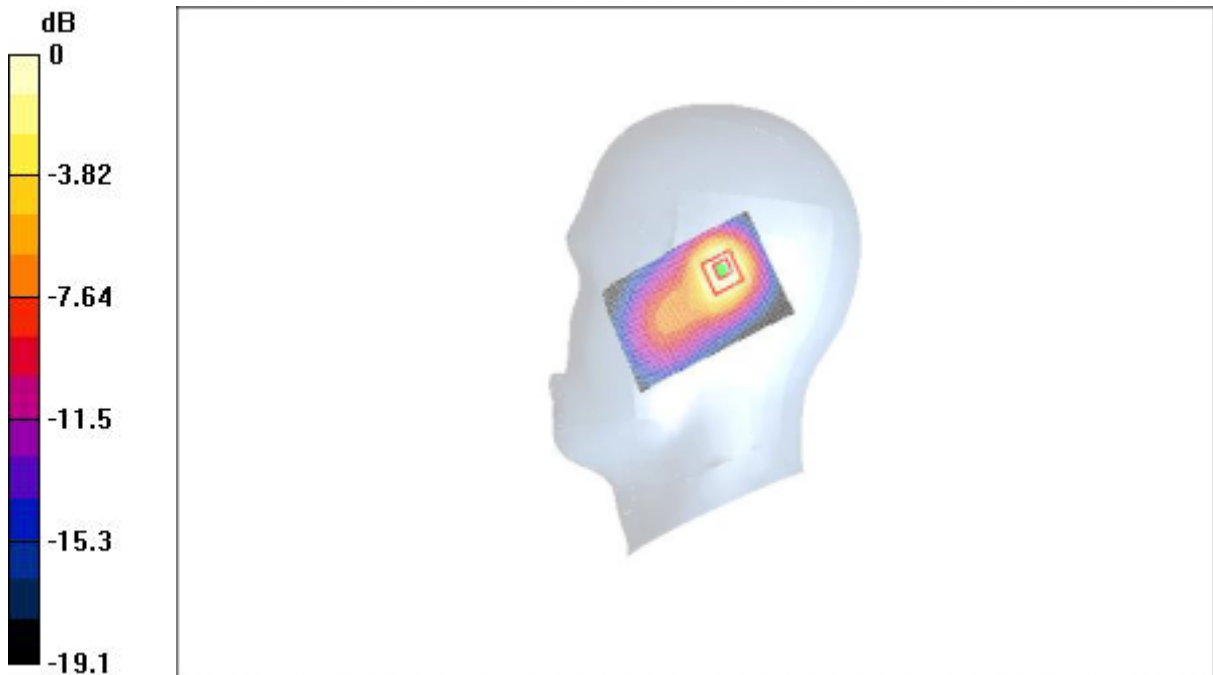

0 dB = 1.1mW/g

**Fig. 21 Right Hand Tilt 15° 1900MHz CH661**

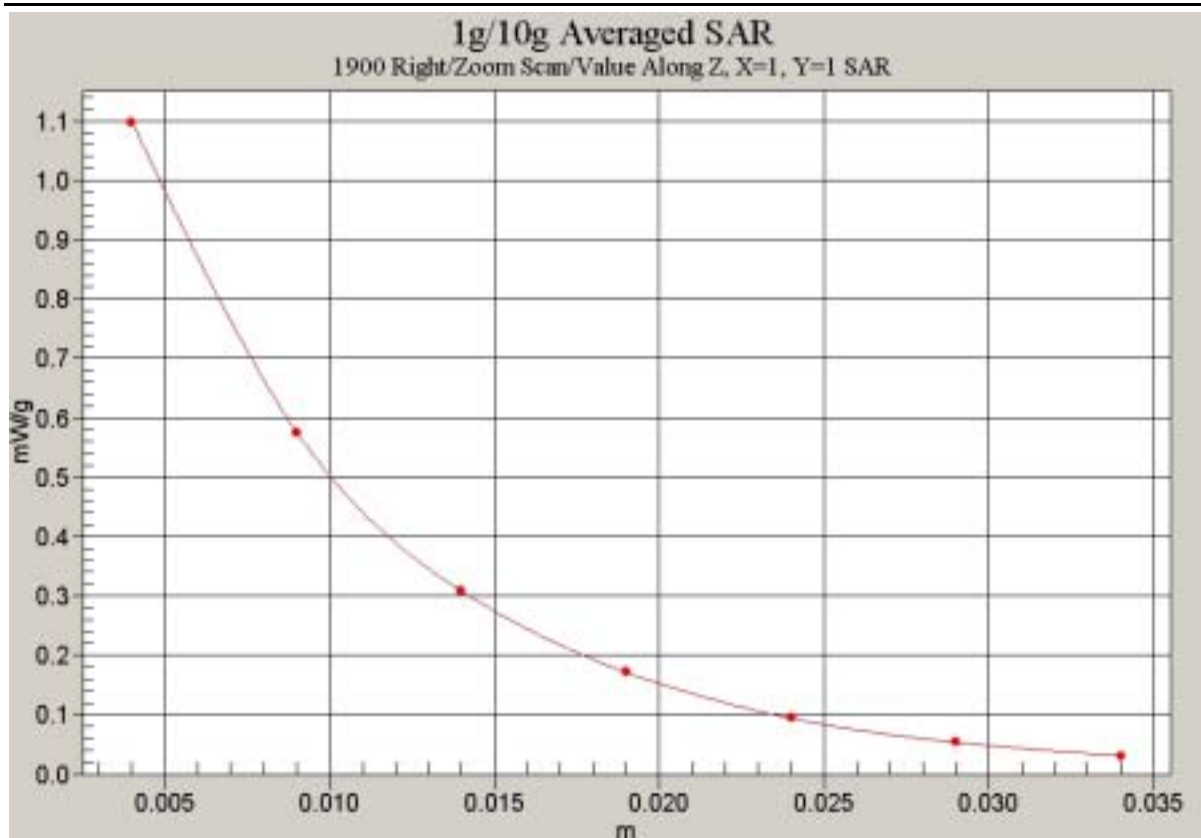


Fig. 22 Z-Scan at power reference point (Right Hand Tilt 15° 1900MHz CH661)

**PCS 1900 Right Tilt High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt High/Area Scan (51x81x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 24.2 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 1.38 mW/g


**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.2 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.26 mW/g

Peak SAR (extrapolated) = 2.45 W/kg

**SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.626 mW/g**

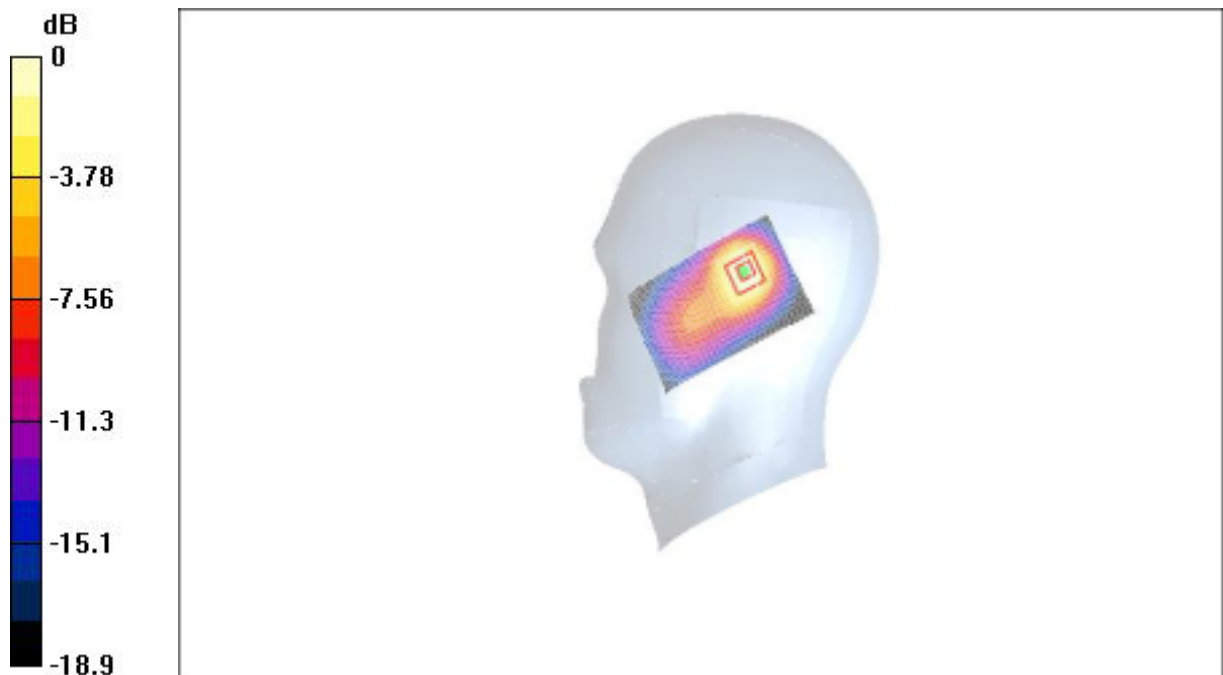

0 dB = 1.26mW/g

**Fig. 23 Right Hand Tilt 15° 1900MHz CH810**

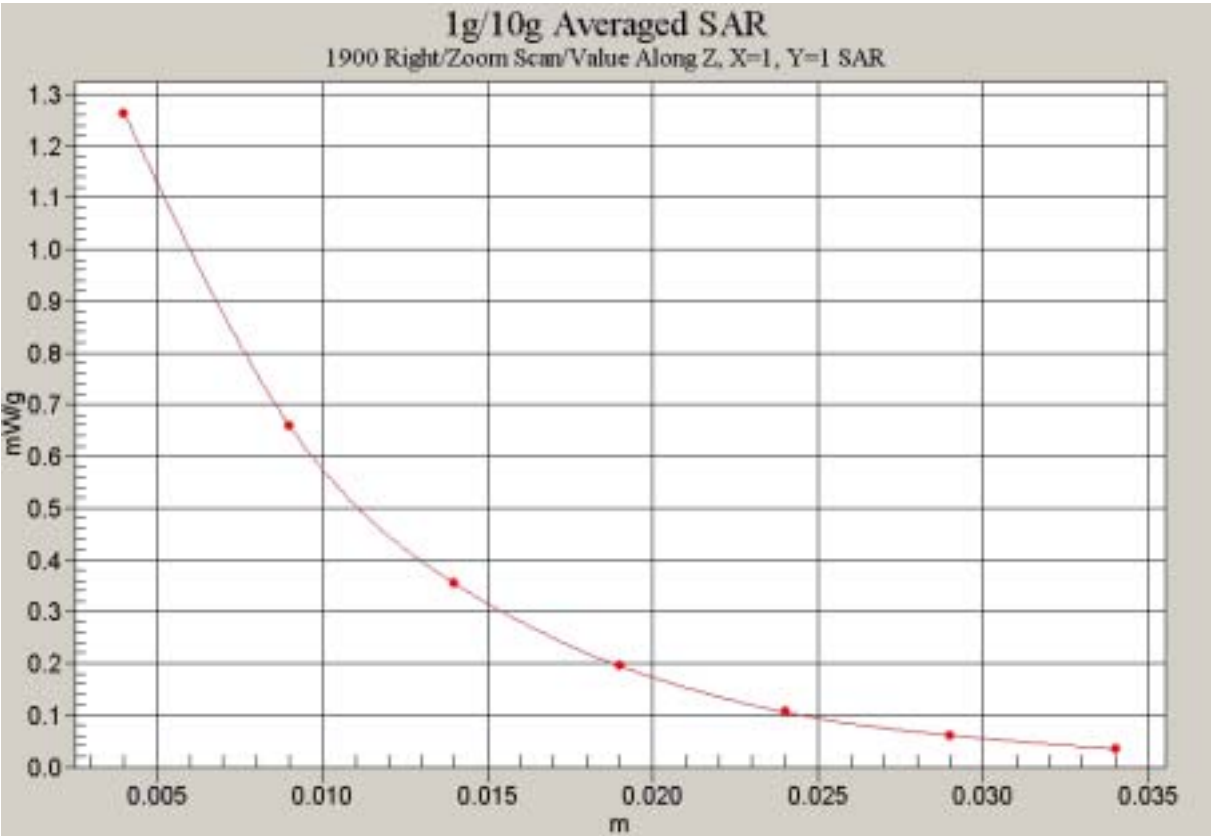


Fig. 24 Z-Scan at power reference point (Right Hand Tilt 15° 1900MHz CH810)

**PCS 1900 Body Toward Phantom Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Toward Phantom Low/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 12.6 V/m; Power Drift = 0.003 dB

Maximum value of SAR (interpolated) = 0.352 mW/g


**Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = 0.003 dB

Maximum value of SAR (measured) = 0.339 mW/g

Peak SAR (extrapolated) = 0.509 W/kg

**SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.209 mW/g**

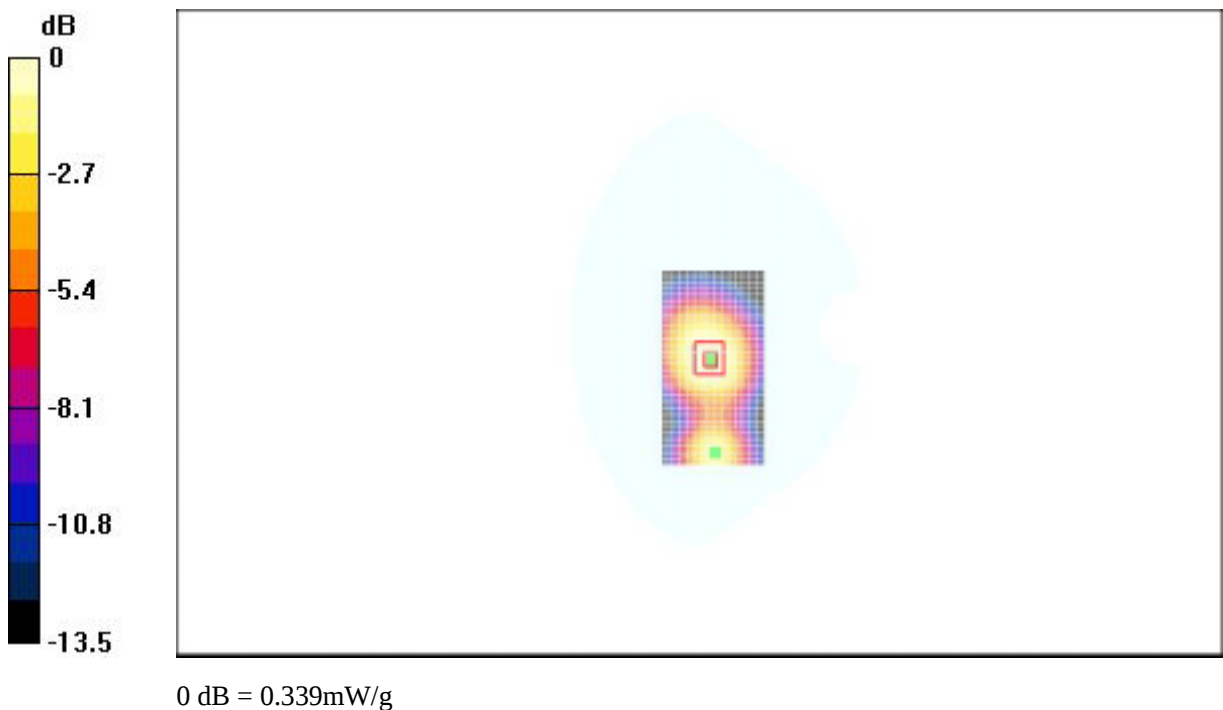

**Fig. 25 Flat Phantom Body-worn Position 1900MHz CH512 with the display of the handset towards the phantom**

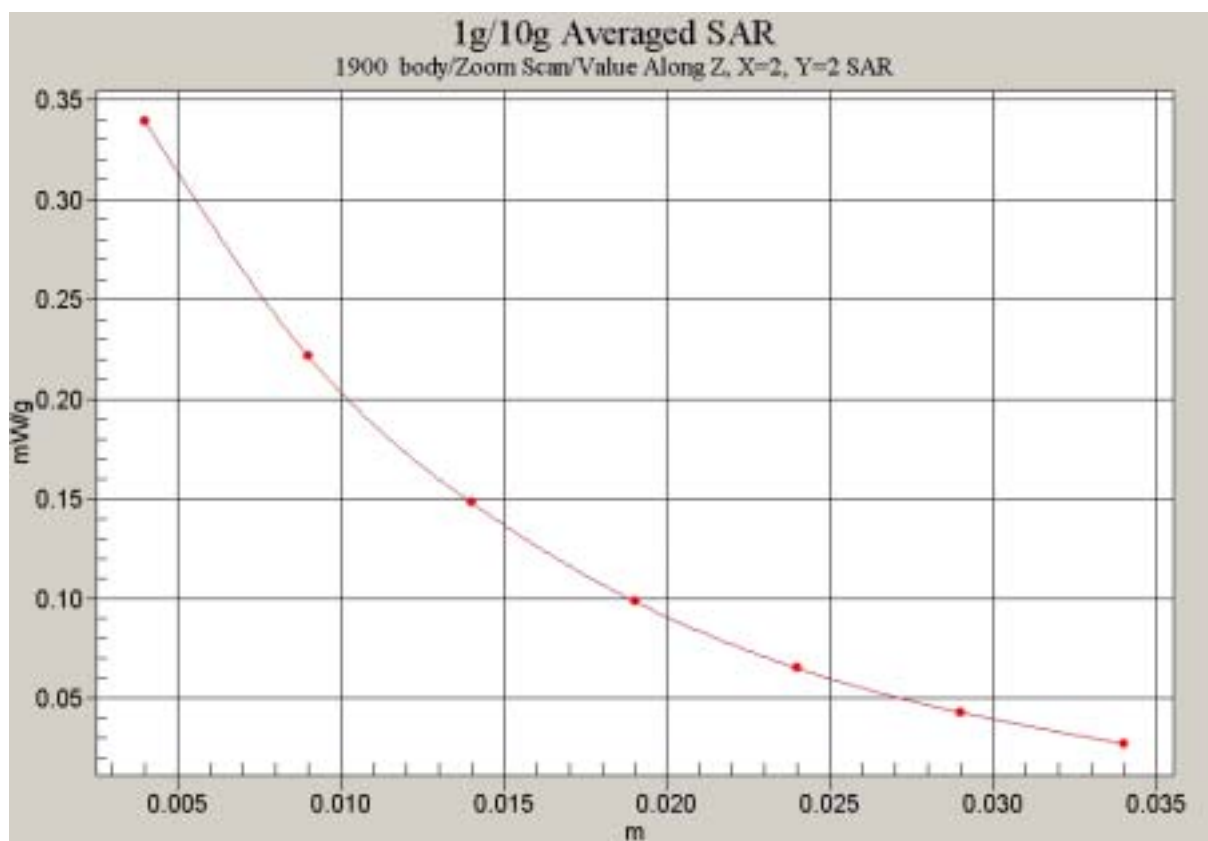


Fig. 26 Z-Scan at power reference point (Flat Phantom 1900MHz CH512 with the display of the handset towards the phantom)

**PCS 1900 Body Toward Phantom Middle**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Toward Phantom Middle/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 11.8 V/m; Power Drift = 0.006 dB

Maximum value of SAR (interpolated) = 0.324 mW/g


**Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = 0.006 dB

Maximum value of SAR (measured) = 0.319 mW/g

Peak SAR (extrapolated) = 0.470 W/kg

**SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.190 mW/g**

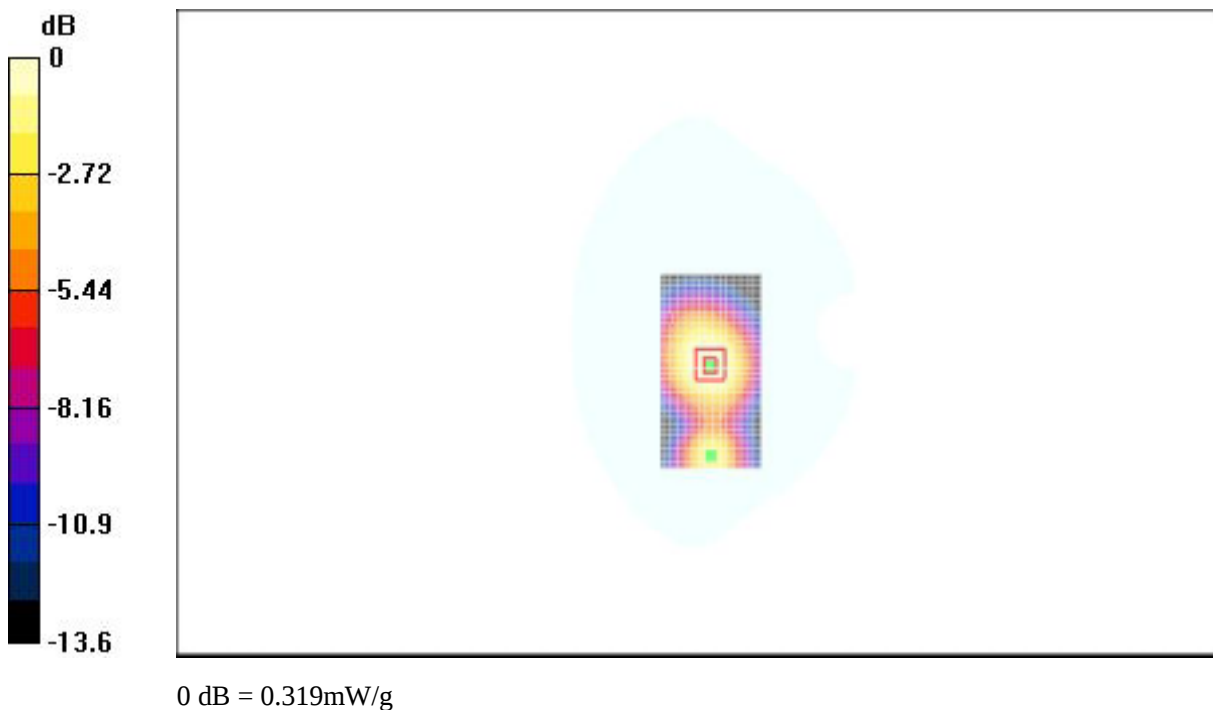

**Fig. 27 Flat Phantom Body-worn Position 1900MHz CH661 with the display of the handset towards the phantom**

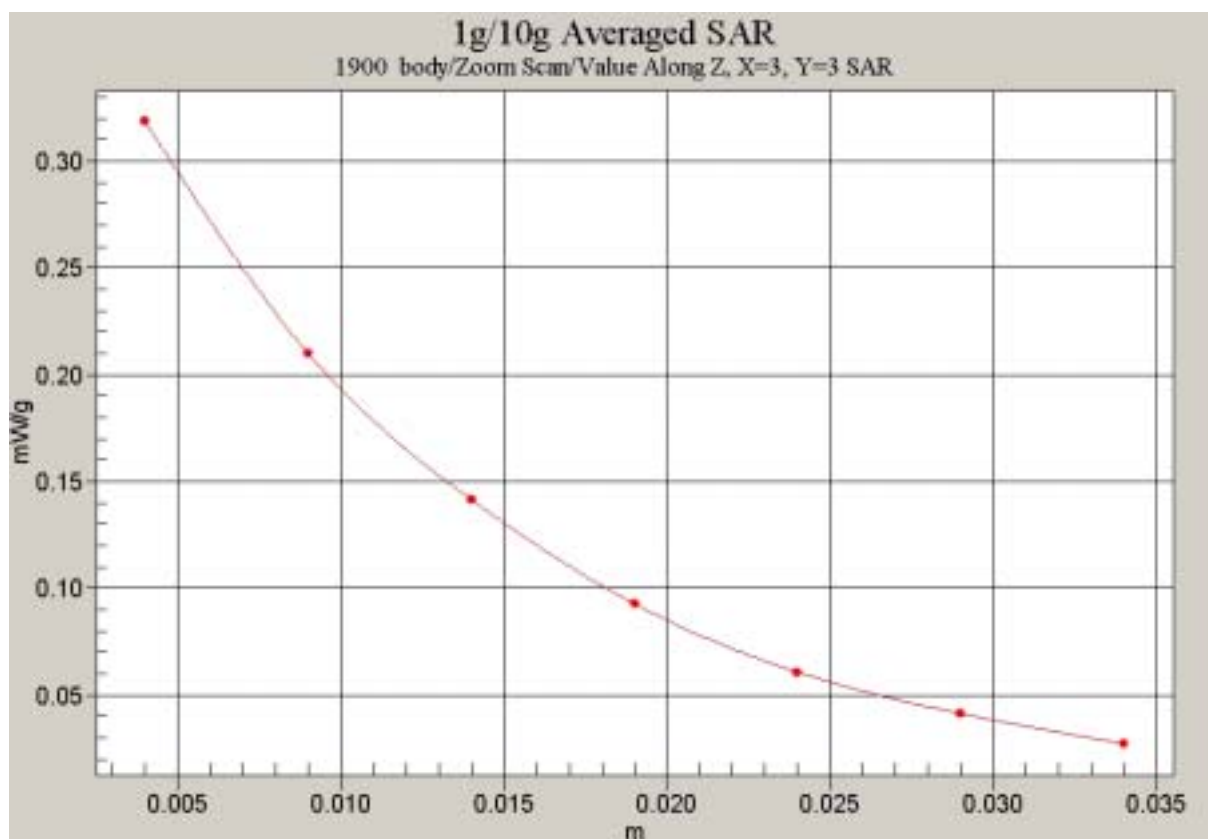


Fig. 28 Z-Scan at power reference point (Flat Phantom 1900MHz CH661 with the display of the handset towards the phantom)

**PCS 1900 Body Toward Phantom High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Toward Phantom High/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 11.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.309 mW/g


**Toward Phantom High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.304 mW/g

Peak SAR (extrapolated) = 0.445 W/kg

**SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.177 mW/g**

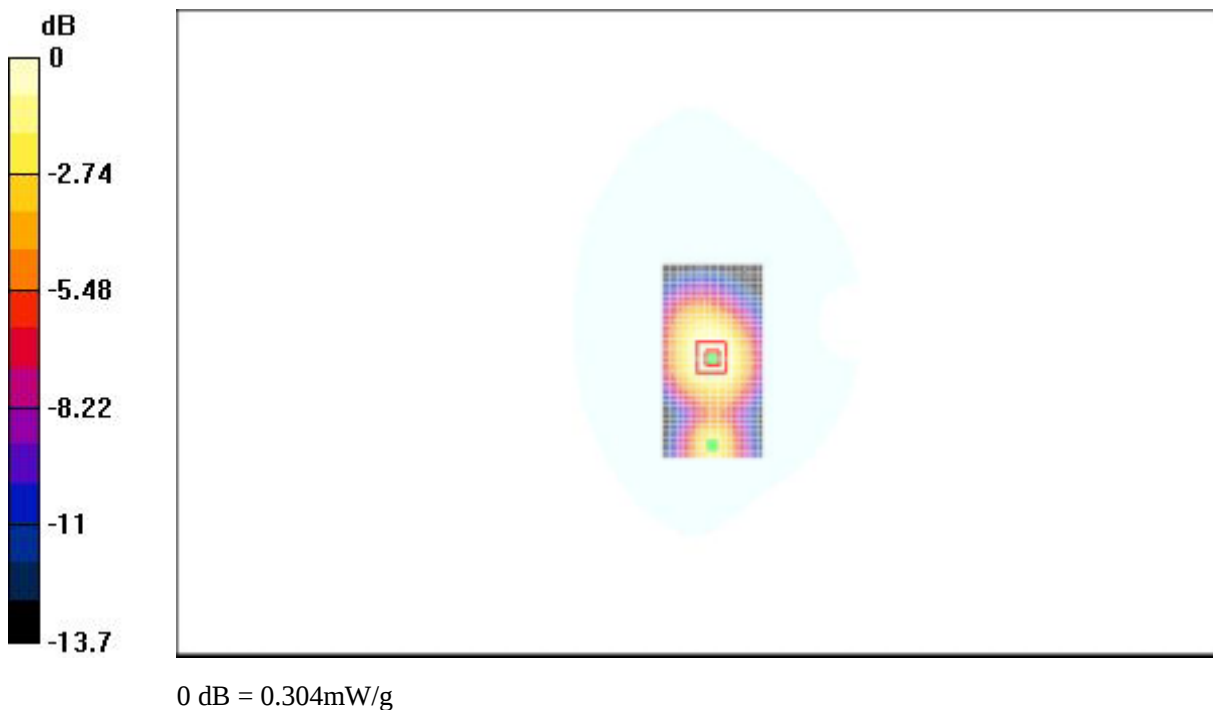

**Fig. 29 Flat Phantom Body-worn Position 1900MHz CH810 with the display of the handset towards the phantom**

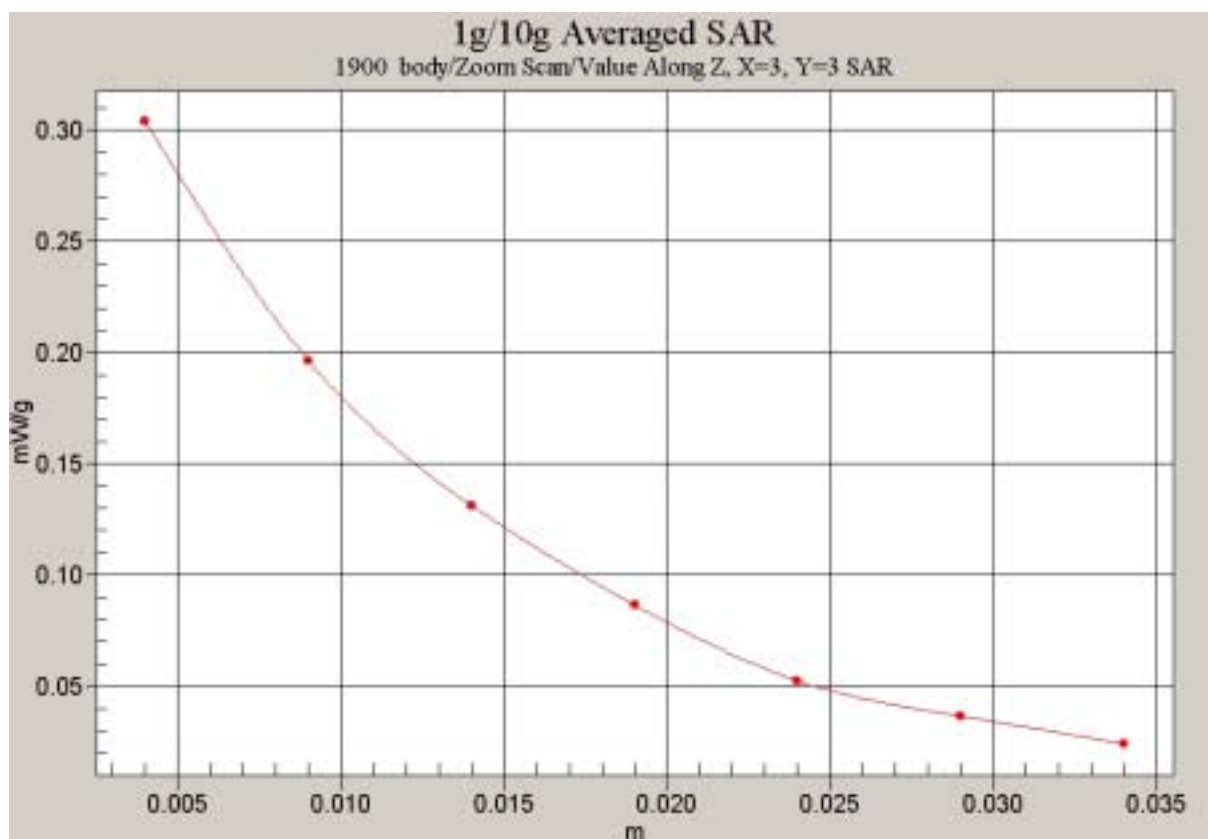


Fig. 30 Z-Scan at power reference point (Flat Phantom 1900MHz CH810 with the display of the handset towards the phantom)

**PCS 1900 Body Toward Ground Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Toward Ground Low/Area Scan (41x71x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 14.8 V/m; Power Drift = 0.004 dB

Maximum value of SAR (interpolated) = 0.508 mW/g


**Toward Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = 0.004 dB

Maximum value of SAR (measured) = 0.468 mW/g

Peak SAR (extrapolated) = 0.712 W/kg

**SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.283 mW/g**

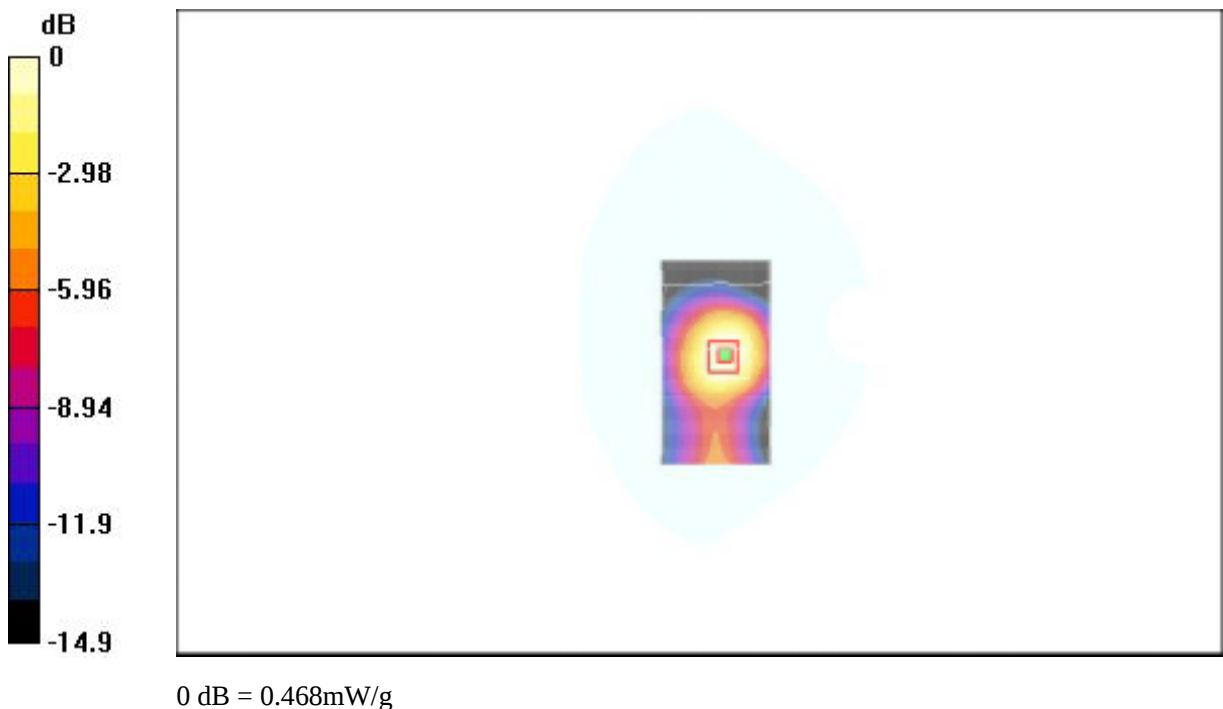

**Fig. 31 Flat Phantom Body-worn Position 1900MHz CH512 with the display of the handset towards the ground**

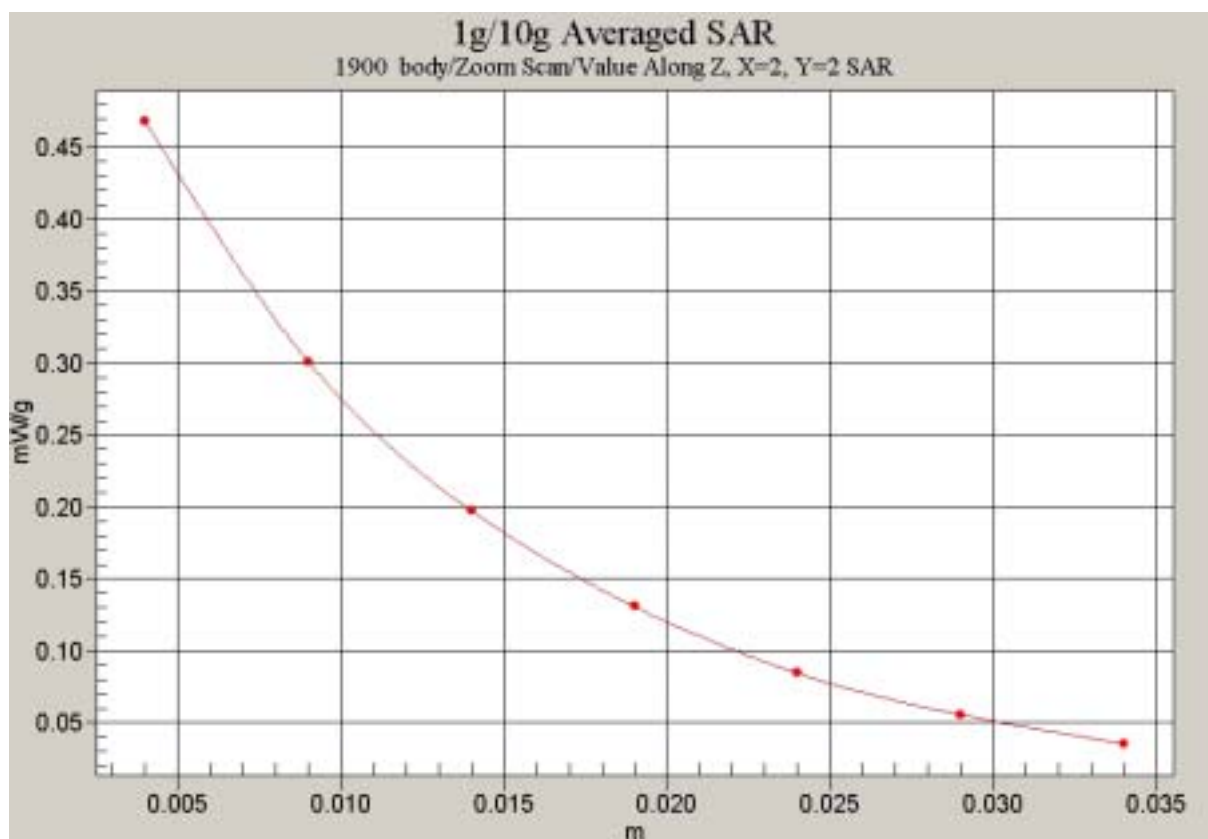


Fig. 32 Z-Scan at power reference point (Flat Phantom 1900MHz CH512 with the display of the handset towards the ground)

**PCS 1900 Body Toward Ground Middle**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Toward Ground Middle/Area Scan (41x71x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 14.2 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.474 mW/g


**Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.432 mW/g

Peak SAR (extrapolated) = 0.648 W/kg

**SAR(1 g) = 0.417 mW/g; SAR(10 g) = 0.262 mW/g**

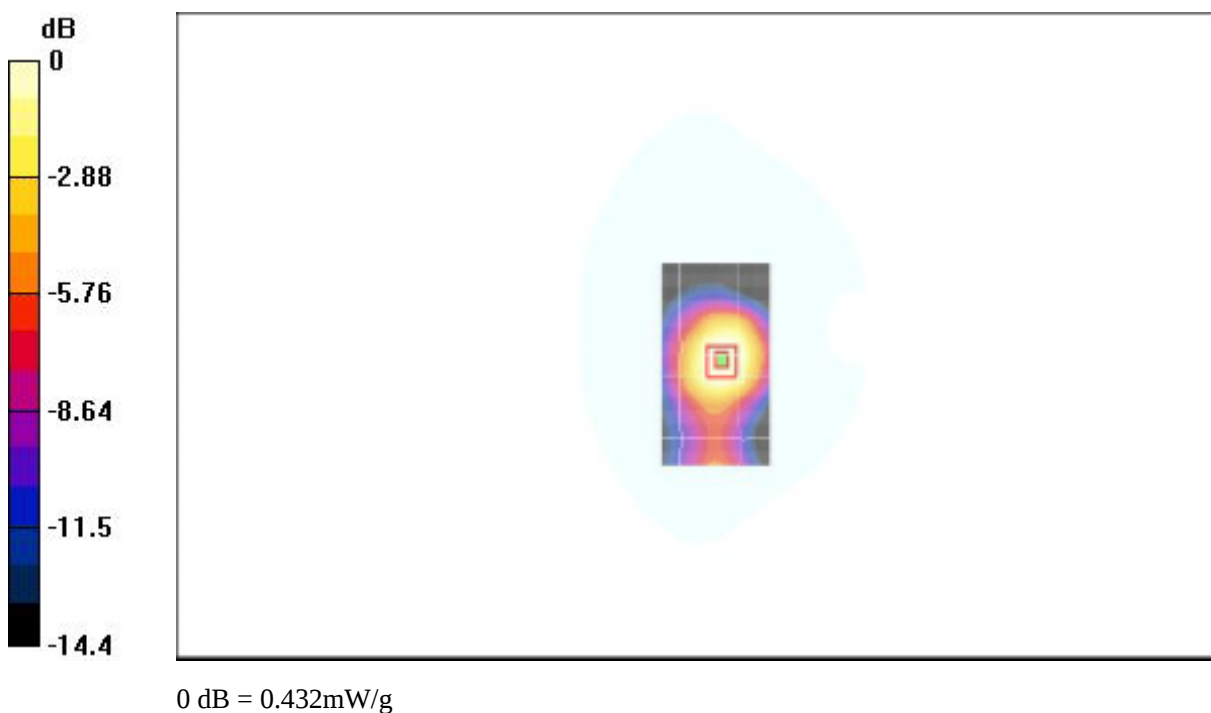

**Fig. 33 Flat Phantom Body-worn Position 1900MHz CH661 with the display of the handset towards the ground**

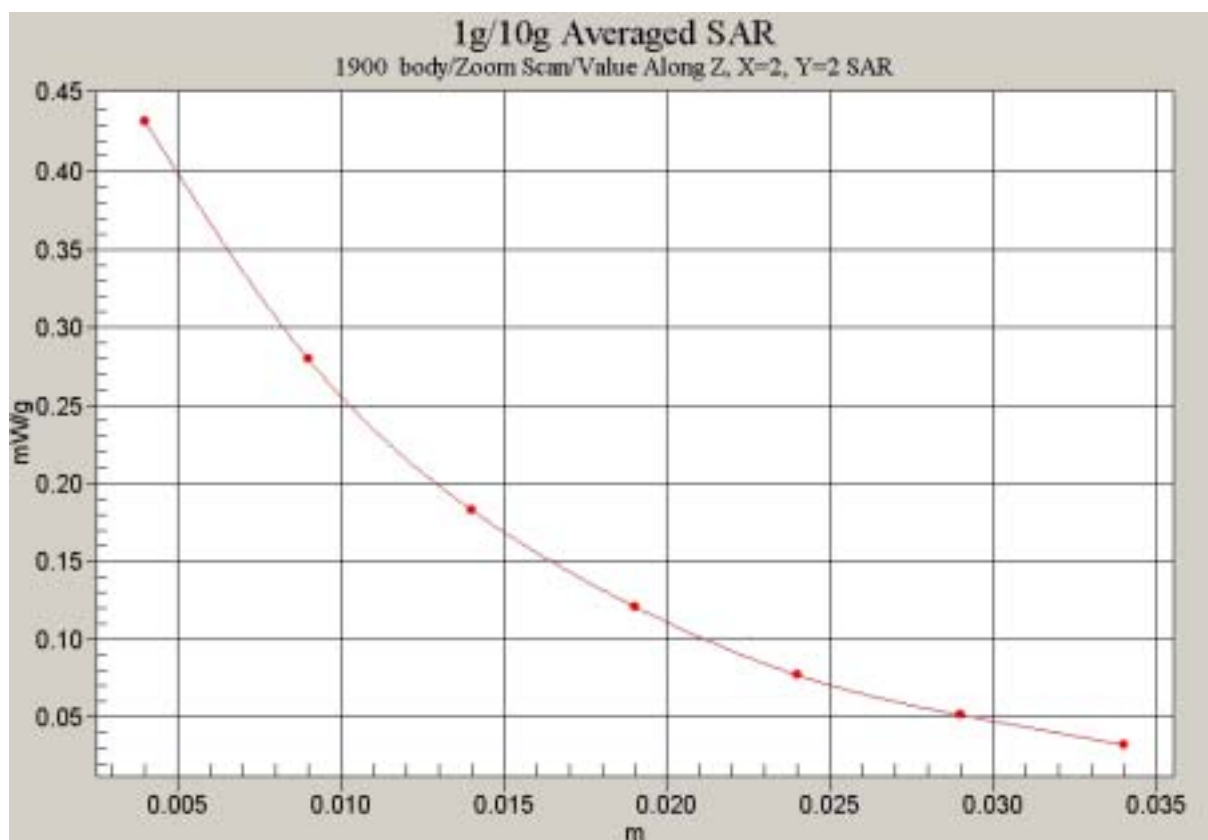


Fig. 34 Z-Scan at power reference point (Flat Phantom 1900MHz CH661 with the display of the handset towards the ground)

**PCS 1900 Body Toward Ground High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Toward Ground High/Area Scan (41x71x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 13.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.442 mW/g


**Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.404 mW/g

Peak SAR (extrapolated) = 0.615 W/kg

**SAR(1 g) = 0.392 mW/g; SAR(10 g) = 0.247 mW/g**

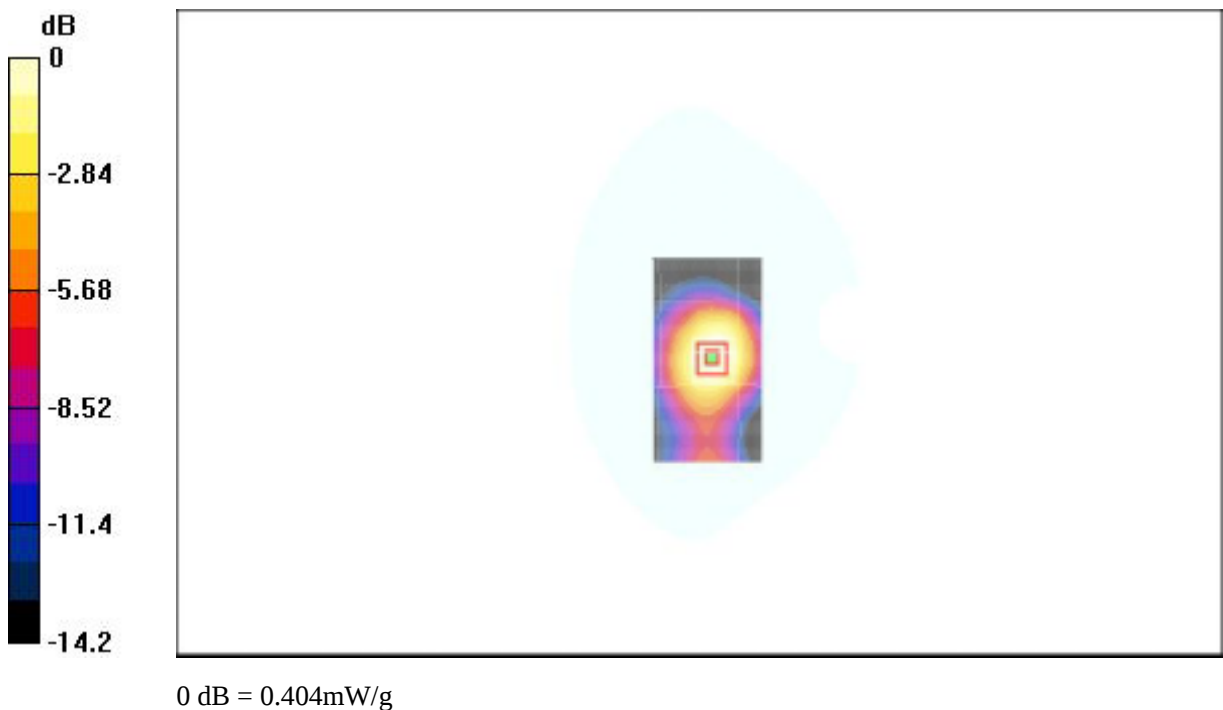

**Fig.35 Flat Phantom Body-worn Position 1900MHz CH810 with the display of the handset towards the ground**

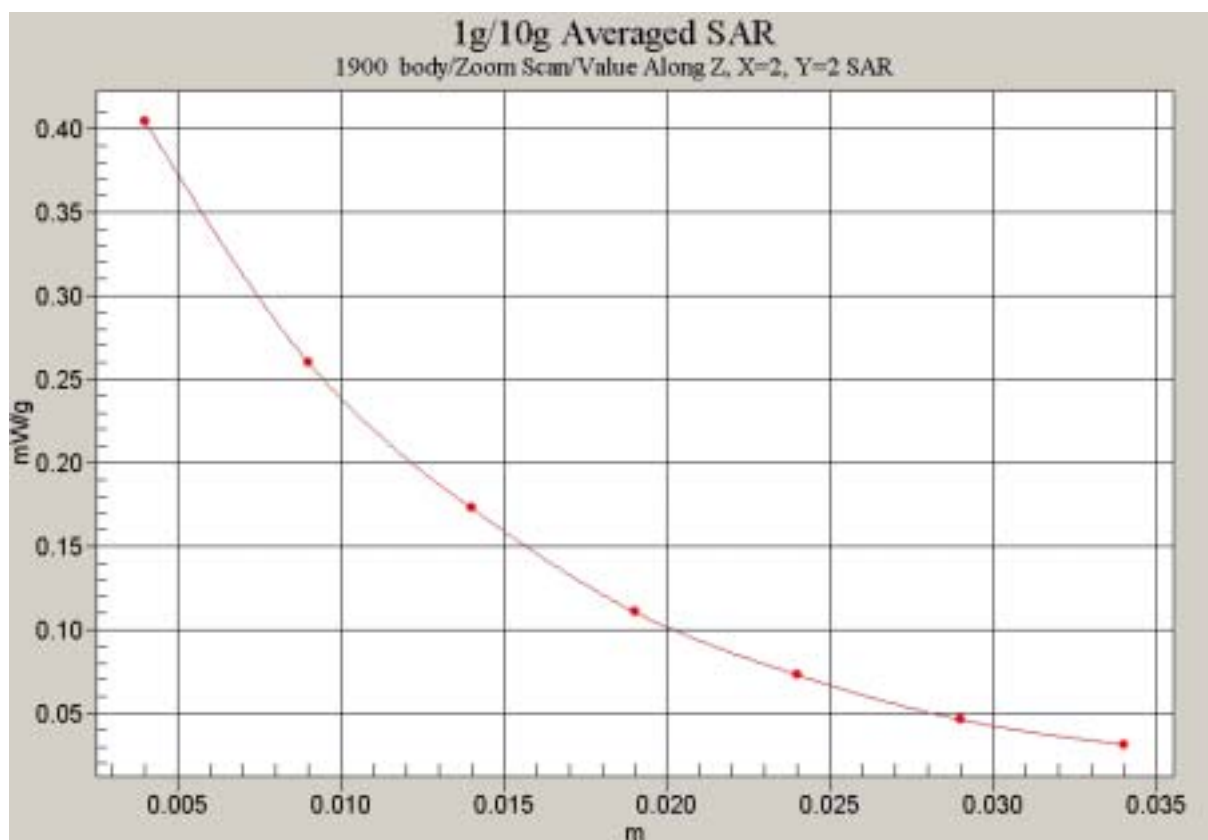


Fig. 36 Z-Scan at power reference point (Flat Phantom 1900MHz CH810 with the display of the handset towards the ground)

## ANNEX D SYSTEM VALIDATION RESULTS

Test Laboratory: TMC

File Name: D1900\_SystemCheck\_040403.da4

**DUT: Dipole 1900 MHz** Type & Serial Number: D1900V2 - SN:541

**Program: Unnamed Program; Dipole 1900MHz**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900 MHz (  $\sigma = 1.46$  mho/m,  $\varepsilon = 39.66$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: FlatSection

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm

Reference Value = 90.9 V/m

Peak SAR = 18.3 mW/g

SAR(1 g) = 9.8 mW/g; SAR(10 g) = 4.91 mW/g

Power Drift = 0.004 dB

**Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm

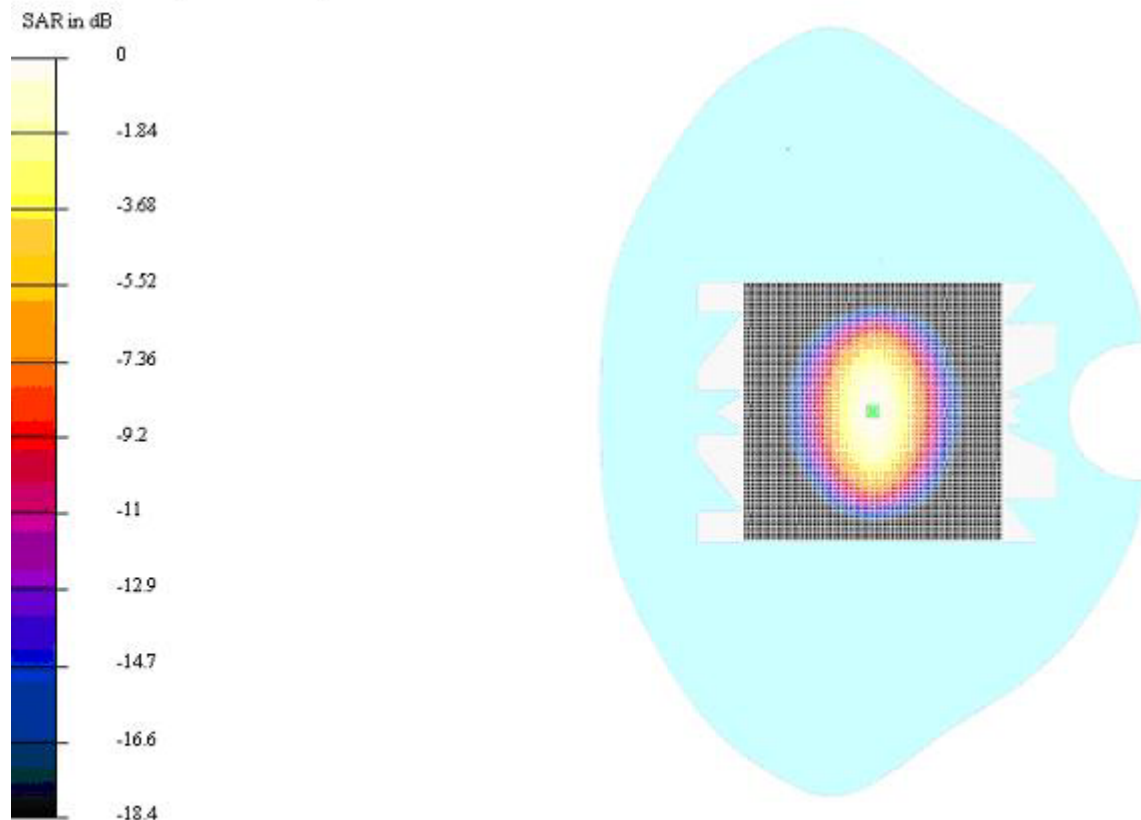


Fig.37 System Performance Check 1900MHz 250mW