

## MEASUREMENT REPORT

### FCC PART 15.247 / RSS-247 BLE

**FCC ID:** R5DCC2650

**IC:** 22682-CC2650

**APPLICANT:** 4MOD Technology

**Application Type:** Certification

**Product:** SENSOR TAG

**Model No.:** CC2650STK

**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part 15.247

**IC Rule(s):** RSS-247 Issue 1, RSS-GEN Issue 4

**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01v03r05

**Test Date:** April 22 ~May 04, 2017

Reviewed By  
Manager : Robin Wu  
( Robin Wu )

Approved By  
CEO : Marlin Chen  
( Marlin Chen )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v03r05. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

## Revision History

Report No.	Version	Description	Issue Date	Note
1704RSU04302	Rev. 01	Initial report	05-04-2017	Valid

## CONTENTS

Description	Page
<b>1. INTRODUCTION .....</b>	<b>6</b>
1.1. Scope .....	6
1.2. MRT Test Location .....	6
<b>2. PRODUCT INFORMATION .....</b>	<b>7</b>
2.1. Feature of Equipment under Test .....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Working Frequencies.....	8
2.4. Device Capabilities .....	9
2.5. Test Configuration .....	9
2.6. EMI Suppression Device(s)/Modifications.....	9
2.7. Labeling Requirements.....	9
2.8. Test Software .....	9
<b>3. DESCRIPTION OF TEST .....</b>	<b>10</b>
3.1. Evaluation Procedure .....	10
3.2. AC Line Conducted Emissions .....	10
3.3. Radiated Emissions .....	11
<b>4. ANTENNA REQUIREMENTS.....</b>	<b>12</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE .....</b>	<b>13</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>14</b>
<b>7. TEST RESULT .....</b>	<b>15</b>
7.1. Summary .....	15
7.2. 6dB Bandwidth Measurement.....	16
7.2.1. Test Limit .....	16
7.2.2. Test Procedure used.....	16
7.2.3. Test Setting.....	16
7.2.4. Test Setup.....	16
7.2.5. Test Result.....	17
7.3. Output Power Measurement.....	18
7.3.1. Test Limit .....	18
7.3.2. Test Procedure Used .....	18
7.3.3. Test Setting .....	18
7.3.4. Test Setup.....	18

---

7.3.5. Test Result of Output Power .....	19
7.4. Power Spectral Density Measurement .....	20
7.4.1. Test Limit .....	20
7.4.2. Test Procedure Used .....	20
7.4.3. Test Setting .....	20
7.4.4. Test Setup .....	20
7.4.5. Test Result .....	21
7.5. Conducted Band Edge and Out-of-Band Emissions .....	22
7.5.1. Test Limit .....	22
7.5.2. Test Procedure Used .....	22
7.5.3. Test Setting .....	22
7.5.4. Test Setup .....	23
7.5.5. Test Result .....	24
7.6. Radiated Spurious Emission Measurement .....	26
7.6.1. Test Limit .....	26
7.6.2. Test Procedure Used .....	26
7.6.3. Test Setting .....	26
7.6.4. Test Setup .....	28
7.6.5. Test Result .....	30
7.7. Radiated Restricted Band Edge Measurement .....	35
7.7.1. Test Result .....	35
<b>8. CONCLUSION.....</b>	<b>43</b>

## §2.1033 General Information

<b>Applicant:</b>	4MOD Technology
<b>Applicant Address:</b>	203, Avenue Carnot, 33150 Cenon, FRANCE
<b>Manufacturer:</b>	eSOL SA
<b>Manufacturer Address:</b>	18, Rue de l'artisanat - Immeuble Makni - ZI Charguia 2 - 2035 Tunis - TUNISIA
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
<b>FCC Registration No.:</b>	809388
<b>IC Registration No.:</b>	11384A
<b>FCC Rule Part(s):</b>	Part 15.247
<b>IC Rule:</b>	RSS-247 Issue 1, RSS-GEN Issue 4
<b>Model No.:</b>	CC2650STK
<b>FCC ID:</b>	R5DCC2650
<b>IC:</b>	22682-CC2650
<b>Test Device Serial No.:</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
<b>FCC Classification:</b>	Digital Transmission System (DTS)

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Feature of Equipment under Test

Product Name	SENSOR TAG
FCC ID	R5DCC2650
IC	22682-CC2650
Model No.	CC2650STK
Brand Name	4MOD
Bluetooth Version	v4.0

### 2.2. Product Specification Subjective to this Report

Bluetooth Frequency	2402~2480MHz
Bluetooth Version	v4.0
Type of modulation	FHSS
Data Rate	1Mbps(GFSK)
Antenna Type	PIFA Antenna
Antenna Gain	0dBi

Note: For other features of this EUT, test report will be issued separately.

### 2.3. Working Frequencies

Channel List for BLE

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

## 2.4. Device Capabilities

This device contains the following capabilities:

Bluetooth v4.0

## 2.5. Test Configuration

The **SENSOR TAG** was tested per the guidance of KDB 558074 D01v03r05. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.6. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.7. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

## 2.8. Test Software

The test utility software used during testing was engineering directive ordered by applicant.

### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v03r05 were used in the measurement of the **SENSOR TAG**

Deviation from measurement procedure.....**None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions were used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the Antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive Antenna height using a broadband Antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn Antennas were used. For frequencies below 30MHz, a calibrated loop Antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband Antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive Antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn Antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive Antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive Antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn Antenna, the horn Antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### **Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **SENSOR TAG** is **permanently attached**.
- There are no provisions for connection to an external antenna.

### **Conclusion:**

The **SENSOR TAG** unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	102030	1 year	2018/04/25
Two-Line V-Network	R&S	ENV216	101683	1 year	2017/06/21
Two-Line V-Network	R&S	ENV216	101684	1 year	2017/06/21
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2017/12/22
Shielding Anechoic Chamber	MIX-BEP	Chamber-SR2	N/A	1 year	2017/05/10

### Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Agilent	N9038A	MY51210182	1 year	2017/08/03
Broadband Coaxial Preamplifier	Agilent	83017A	MY53270040	1 year	2018/03/29
Preamplifier	Schwarzbeck	BBV 9721	9721-008	1 year	2018/04/16
Loop Antenna	Schwarzbeck	FMZB1519	100982	1 year	2017/12/21
TRILOG Antenna	Schwarzbeck	VULB9162	9162-047	1 year	2017/10/22
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	1457	1 year	2017/11/19
Broadband Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170549	1 year	2018/01/04
Digital Thermometer & Hygrometer	Yuhuaze	HTC-2	N/A	1 year	2017/12/22
Anechoic Chamber	TDK	Chamber-AC1	N/A	1 year	2018/05/10

### Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MY52090106	1 year	2018/04/25
USB wideband power sensor	Boonton	55006	8911	1 year	2018/04/25
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2017/12/22

Software	Version	Function
e3	V8.3.5	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB

## 7. TEST RESULT

### 7.1. Summary

Company Name: 4MOD Technology  
FCC ID: R5DCC2650  
IC: 22682-CC2650  
Data Rate(s) Tested: 1Mbps(GFSK) (BLE)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	RSS-247 [5.4(4)]	Output Power	$\leq 1\text{Watt}$		Pass	Section 7.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc}(\text{Peak})$		Pass	Section 7.5
15.205 15.209	RSS-247 [5.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	$< \text{FCC 15.207}$ limits	Line Conducted	Pass	Section 7.8

#### Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

## 7.2. 6dB Bandwidth Measurement

### 7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 7.2.2. Test Procedure used

KDB 558074 D01v03r05 - Section 8.2 Option 2

### 7.2.3. Test Setting


1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

### 7.2.4. Test Setup

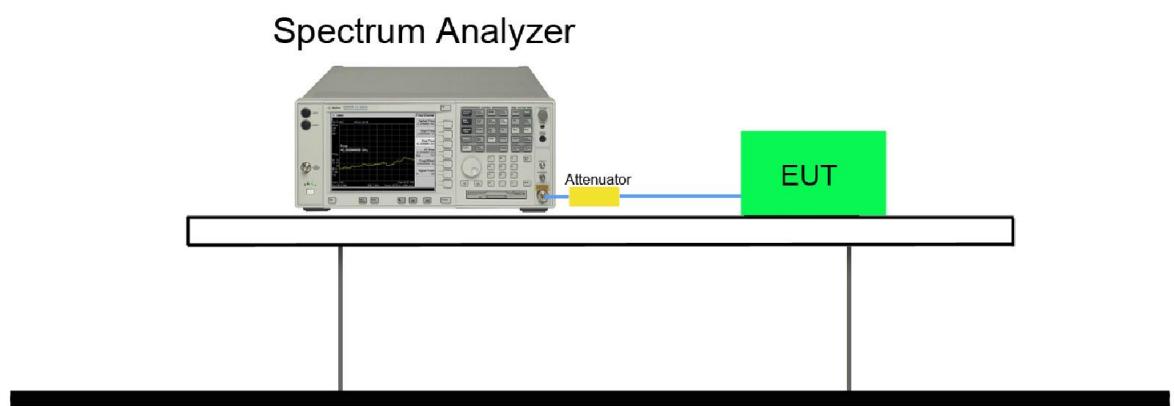

### 7.2.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	99% Bandwidth (MHz)	Result
BLE	1	00	2402	0.70	$\geq 0.5$	1.068	Pass
BLE	1	19	2440	0.72	$\geq 0.5$	1.074	Pass
BLE	1	39	2480	0.72	$\geq 0.5$	1.075	Pass

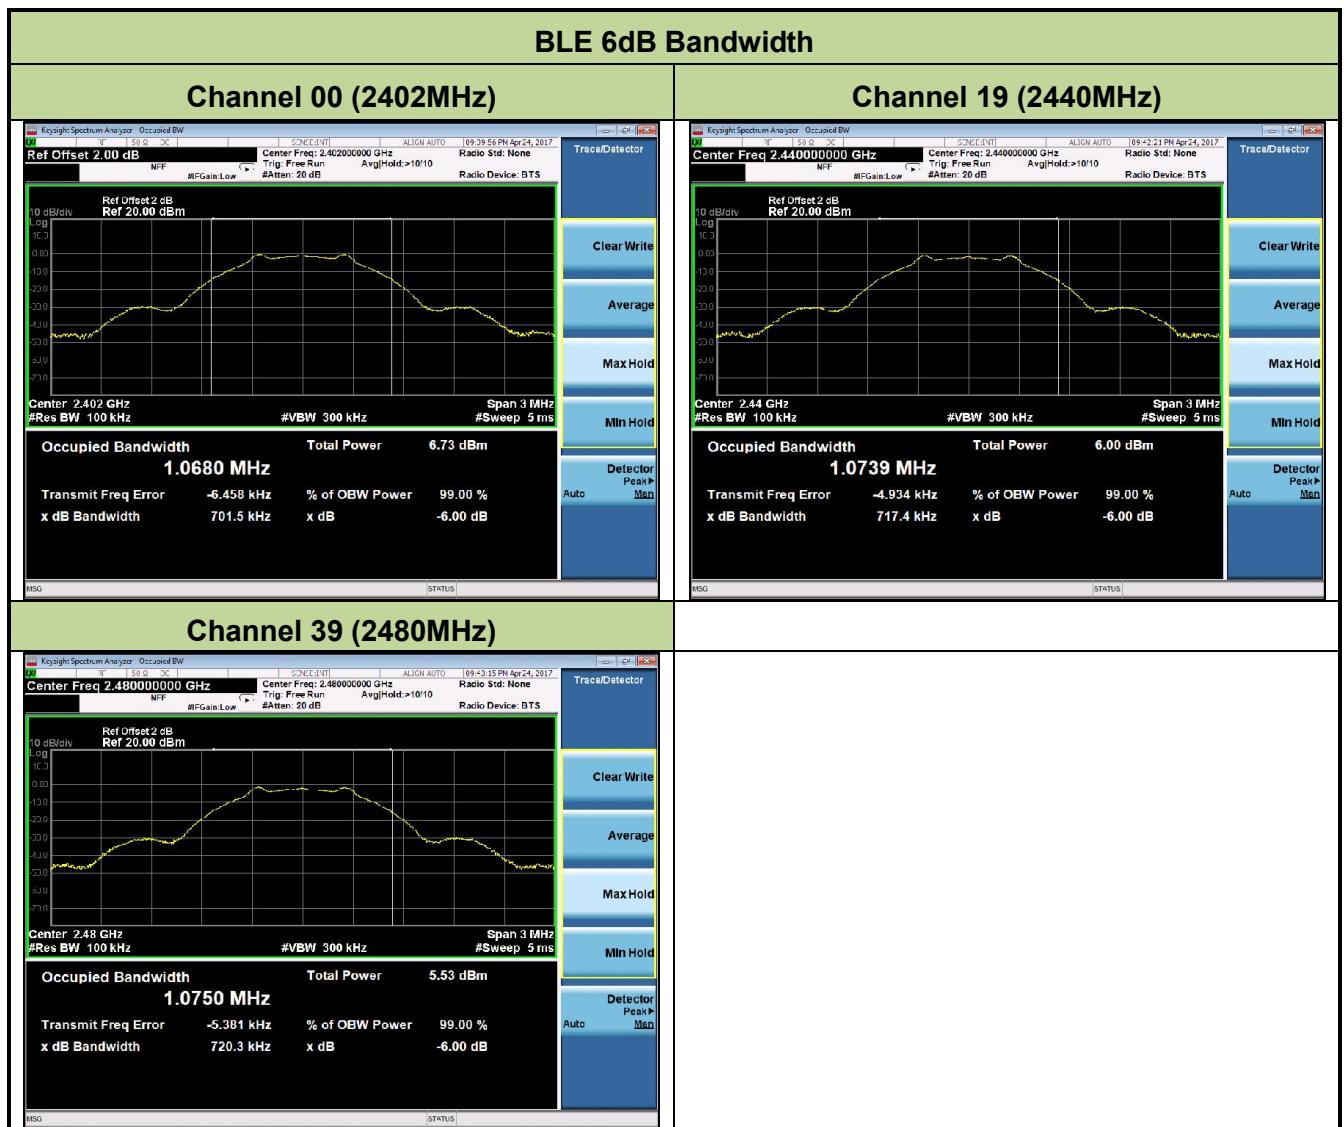

### 7.3. Output Power Measurement

#### 7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

#### 7.3.2. Test Procedure Used


KDB 558074 D01v03r05 - Section 9.1.2 PKPM1 - Peak Power Method

#### 7.3.3. Test Setting

##### **Method PKPM1 (Peak Power Measurement of Signals with DTS BW ≤ 50MHz)**

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

#### 7.3.4. Test Setup

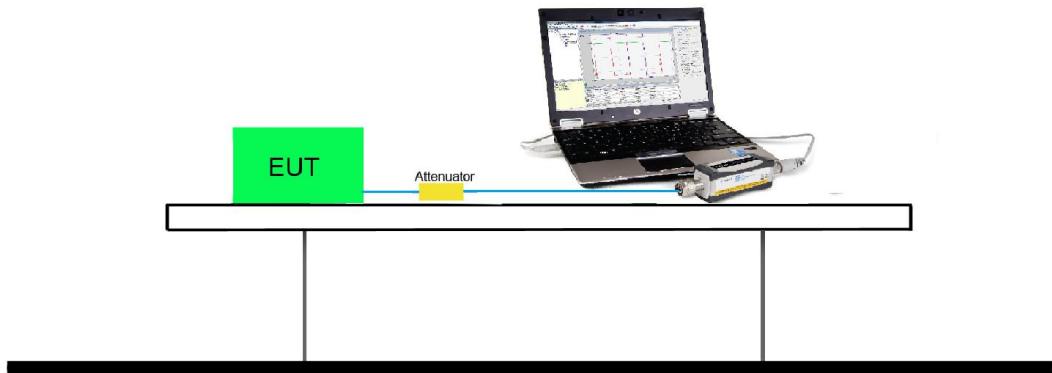

### 7.3.5. Test Result of Output Power

#### Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	Limit (dBm)	Result
BLE	1	00	2402	-0.19	≤ 30	-0.19	≤ 36	Pass
BLE	1	19	2440	-0.58	≤ 30	-0.58	≤ 36	Pass
BLE	1	39	2480	-1.19	≤ 30	-1.19	≤ 36	Pass

#### Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
BLE	1	00	2402	-0.32	≤ 30	Pass
BLE	1	19	2440	-0.71	≤ 30	Pass
BLE	1	39	2480	-1.34	≤ 30	Pass

## 7.4. Power Spectral Density Measurement

### 7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.


### 7.4.2. Test Procedure Used

KDB 558074 D01v03r05 - Section 10.2 Method PKPSD

### 7.4.3. Test Setting


1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### 7.4.4. Test Setup

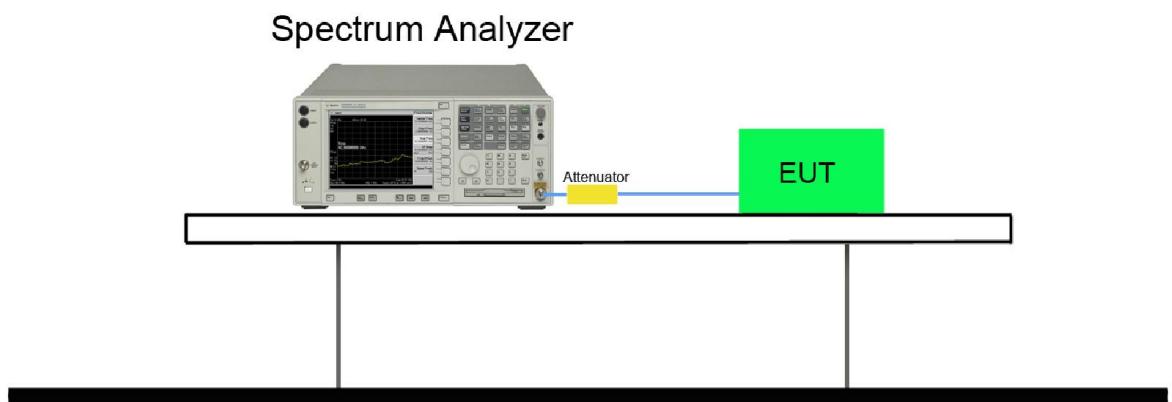

#### 7.4.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
BLE	1	00	2402	-10.18	≤ 8	Pass
BLE	1	19	2440	-11.08	≤ 8	Pass
BLE	1	39	2480	-11.33	≤ 8	Pass

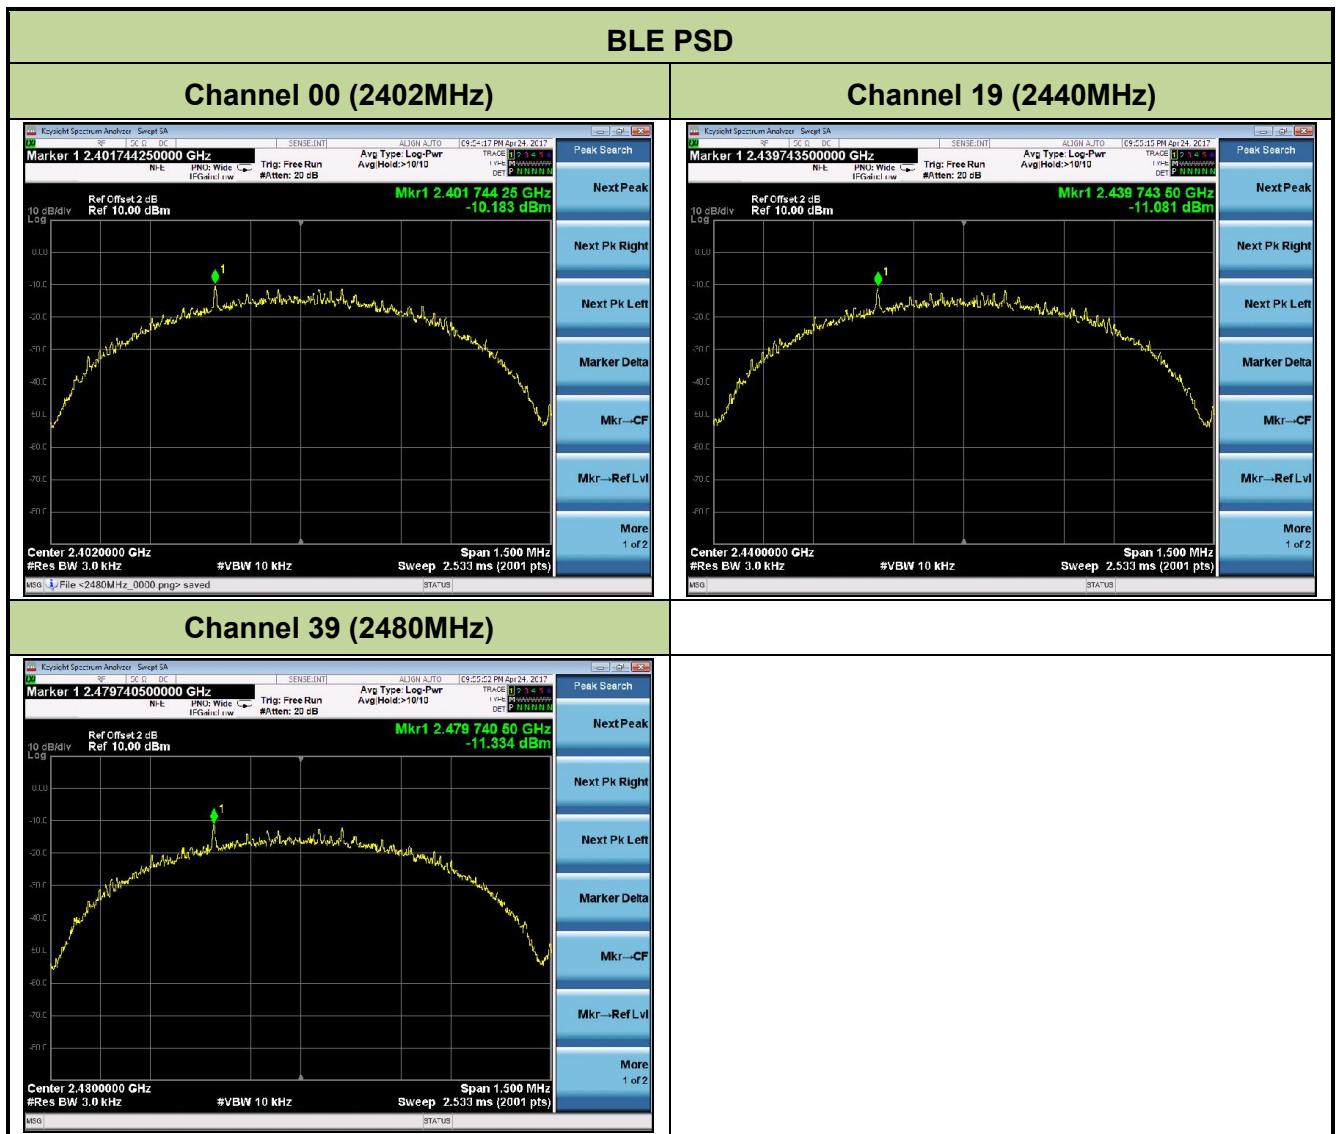

## 7.5. Conducted Band Edge and Out-of-Band Emissions

### 7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

### 7.5.2. Test Procedure Used

KDB 558074 D01v03r05 - Section 11.2 & Section 11.3

### 7.5.3. Test Setting

#### 1. Reference level measurement

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to  $\geq$  1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW  $\geq$  3 x RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize


#### 2. Emission level measurement

- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Number of sweep points  $\geq$  2 x Span/RBW
- (f) Trace mode = max hold
- (g) Sweep time = auto couple

(h) The trace was allowed to stabilize


#### 7.5.4. Test Setup

Spectrum Analyzer

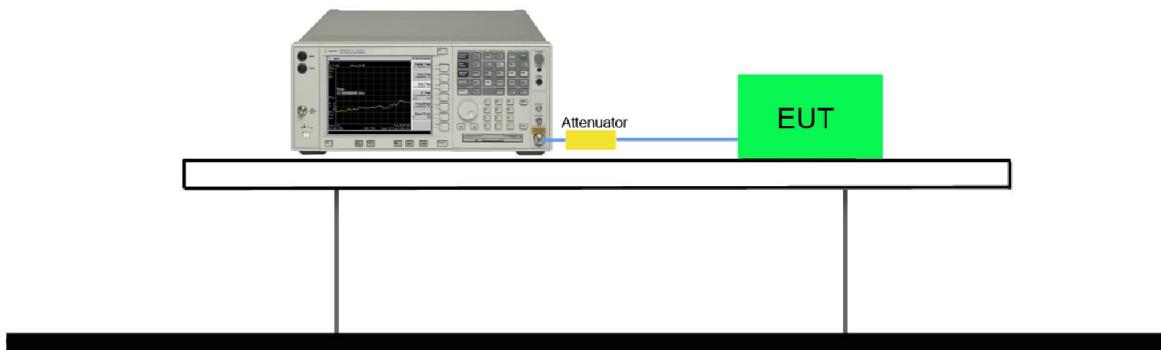

### 7.5.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
BLE	1	00	2402	20dBc	Pass
BLE	1	19	2440	20dBc	Pass
BLE	1	39	2480	20dBc	Pass

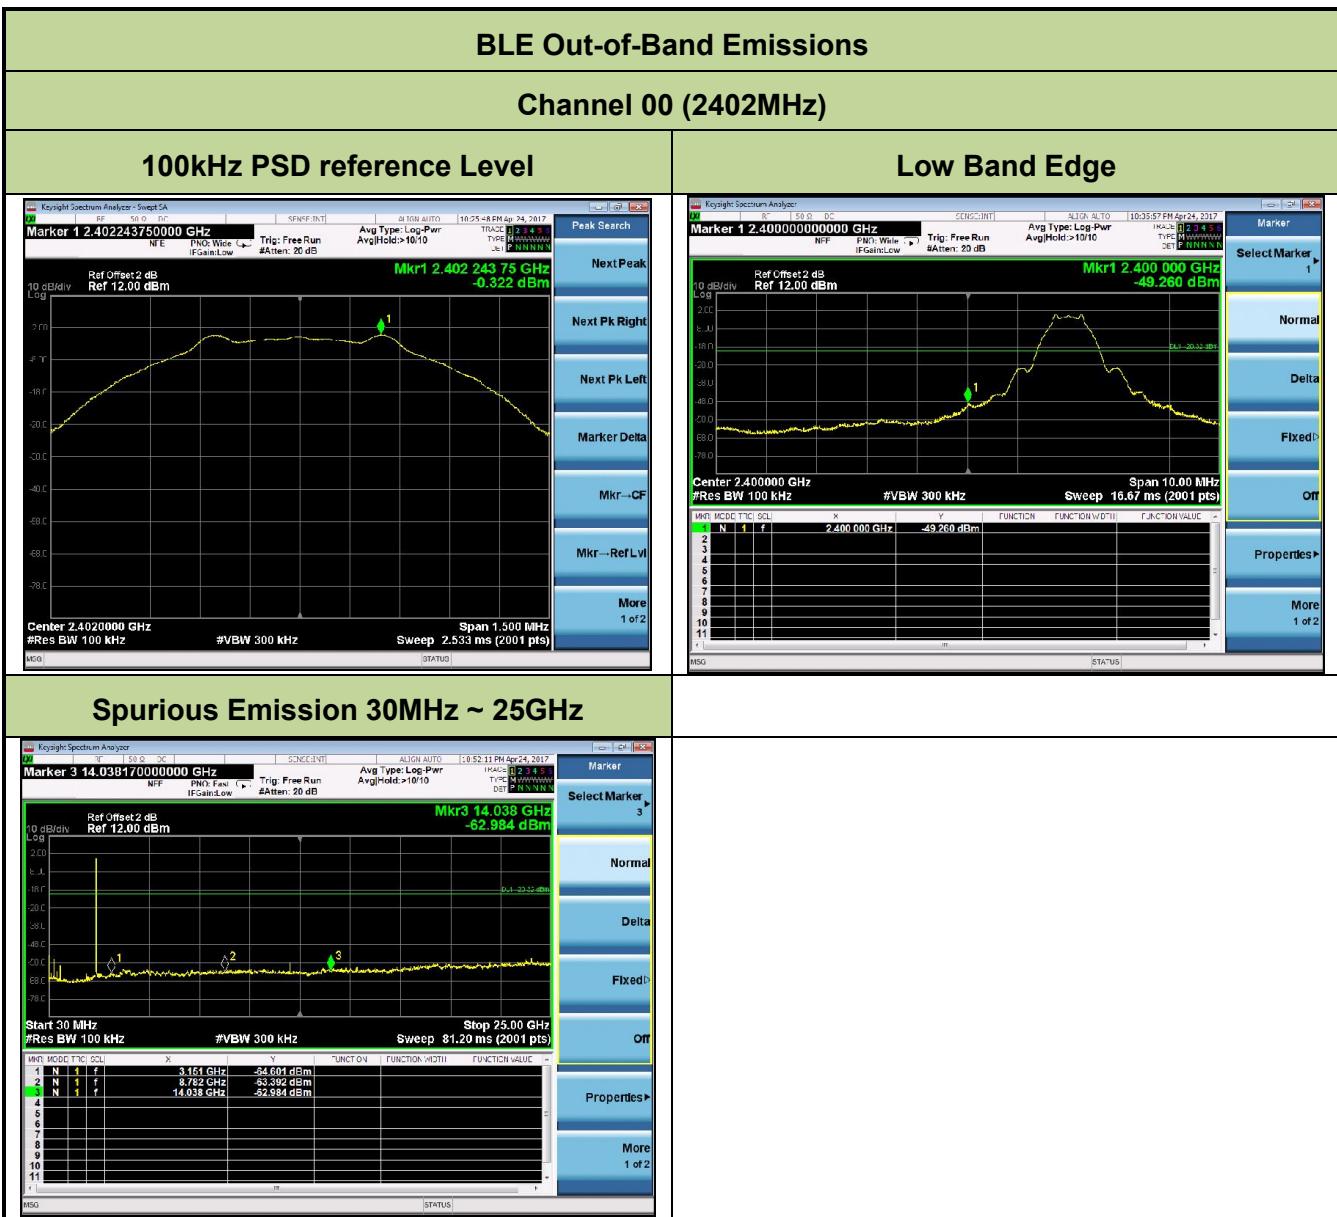


### Channel 19 (2440MHz)

#### 100kHz PSD reference Level



#### Spurious Emission 30MHz ~ 25GHz

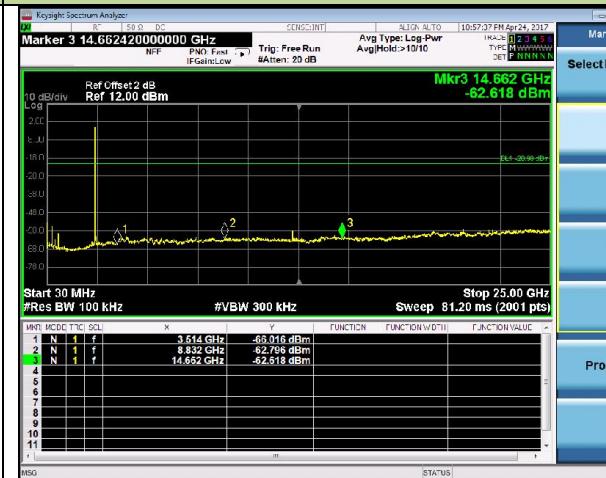


### Channel 39 (2480MHz)


#### 100kHz PSD reference Level



#### High Band Edge

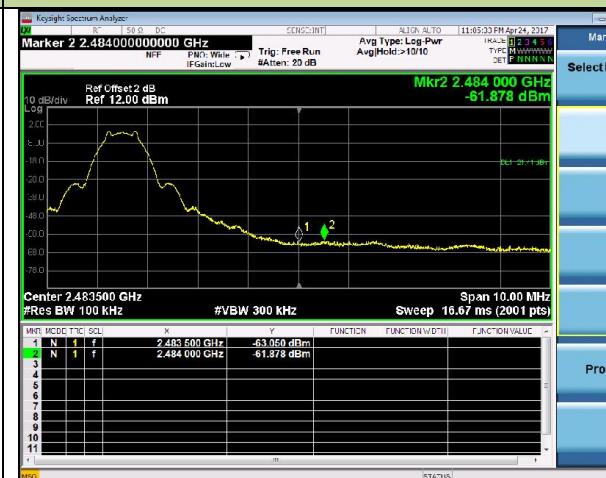

#### Spurious Emission 30MHz ~ 25GHz

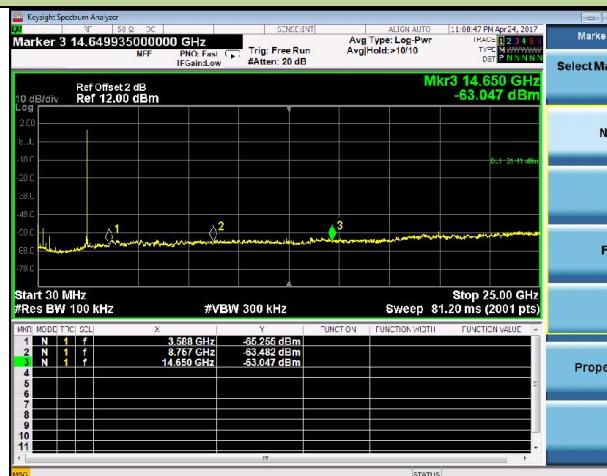

## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 7.6.2. Test Procedure Used

KDB 558074 D01v03r05 - Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v03r05 - Section 12.2.4 (peak power measurements)

KDB 558074 D01v03r05 - Section 12.2.5 (average power measurements)

### 7.6.3. Test Setting

#### Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 D01v03r05

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak

5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

**Average Field Strength Measurements per Section 12.2.4 of KDB 558074 D01v03r05**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW  $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces



#### 7.6.4. Test Setup

##### 9kHz ~ 30MHz Test Setup:

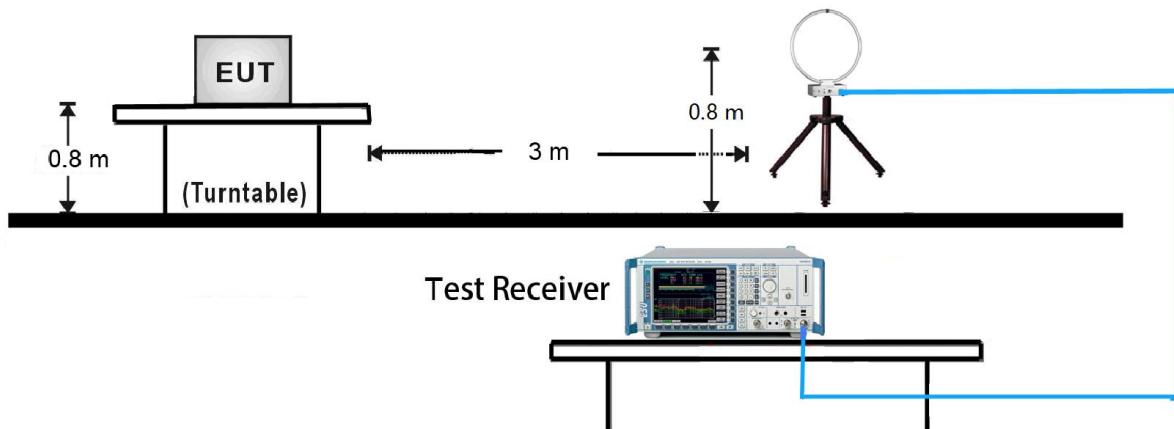

##### 30MHz ~ 1GHz Test Setup:

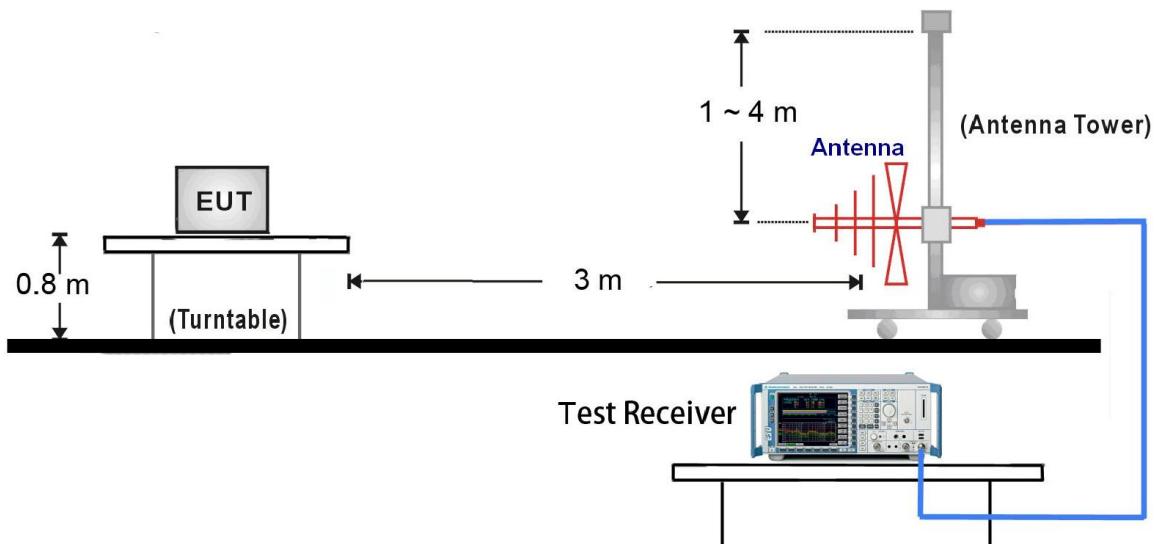

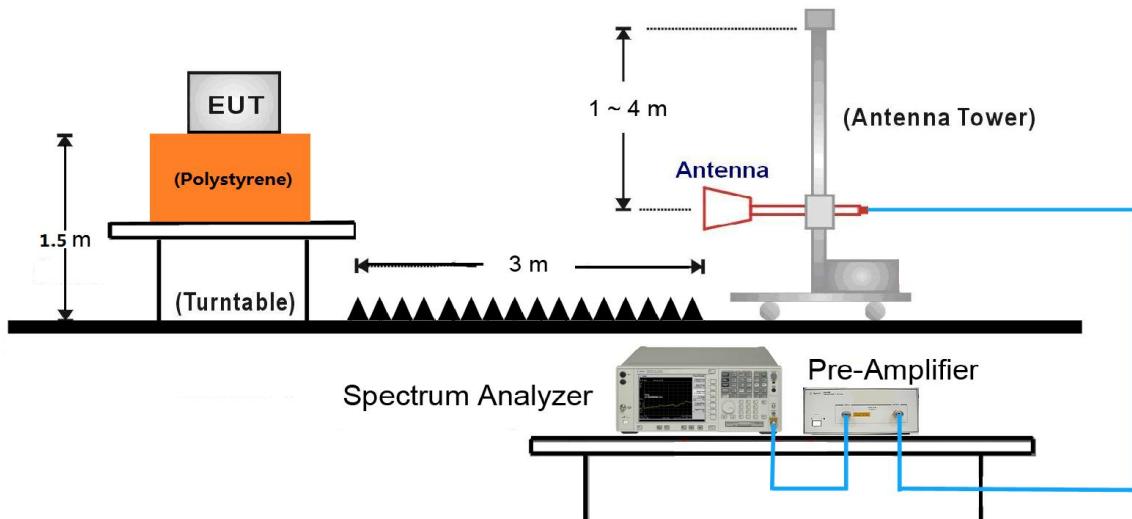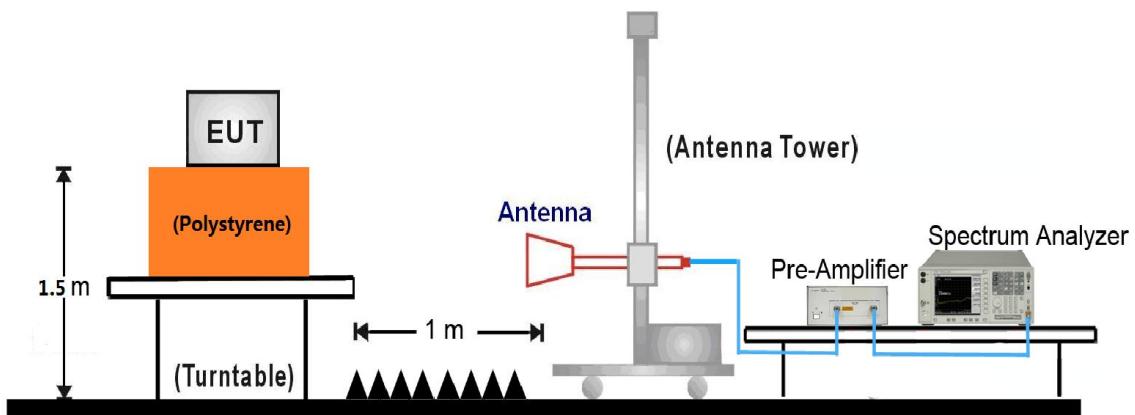1GHz ~ 18GHz Test Setup:

18GHz ~25GHz Test Setup:


### 7.6.5. Test Result

**Remark:** There are the ambient noise within frequency range 9 kHz ~ 30 MHz and 18GHz ~ 25GHz, the permissible value is not show in the report.

Test Mode:	BLE	Test Site:	AC1
Test Channel:	00	Test Engineer:	Bruce Wang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4808.00	37.75	2.69	40.44	74.00	-33.56	Peak	Horizontal
	7519.50	36.42	8.30	44.72	74.00	-29.28	Peak	Horizontal
*	8820.00	35.85	9.02	44.87	74.00	-29.13	Peak	Horizontal
*	10154.50	35.13	11.61	46.74	74.00	-27.26	Peak	Horizontal
	4808.00	37.16	2.69	39.85	74.00	-34.15	Peak	Vertical
	7621.50	36.73	8.05	44.78	74.00	-29.22	Peak	Vertical
*	8828.50	36.35	9.07	45.42	74.00	-28.58	Peak	Vertical
*	10188.50	36.03	11.75	47.78	74.00	-26.22	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is 20dBc of the fundamental emission level (88.6 dB $\mu$ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Mode:	BLE	Test Site:	AC1
Test Channel:	19	Test Engineer:	Bruce Wang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4876.00	35.93	2.68	38.61	74.00	-35.39	Peak	Horizontal
	8046.50	36.06	8.76	44.82	74.00	-29.18	Peak	Horizontal
*	8854.00	36.59	9.09	45.68	74.00	-28.32	Peak	Horizontal
*	10129.00	35.00	11.56	46.56	74.00	-27.44	Peak	Horizontal
	4816.50	36.45	2.70	39.15	74.00	-34.85	Peak	Vertical
	7630.00	36.67	8.04	44.71	74.00	-29.29	Peak	Vertical
*	8862.50	35.97	9.11	45.08	74.00	-28.92	Peak	Vertical
*	10307.50	35.07	12.04	47.11	74.00	-26.89	Peak	Vertical

Note 1: “\*” is not in restricted band, its limit is 20dBc of the fundamental emission level (88.2 dB $\mu$ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Mode:	BLE	Test Site:	AC1
Test Channel:	39	Test Engineer:	Bruce Wang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4935.50	36.63	2.79	39.42	74.00	-34.58	Peak	Horizontal
	7400.50	35.45	7.94	43.39	74.00	-30.61	Peak	Horizontal
*	8633.00	37.30	8.77	46.07	74.00	-27.93	Peak	Horizontal
*	10180.00	36.23	11.74	47.97	74.00	-26.03	Peak	Horizontal
	4740.00	36.33	2.50	38.83	74.00	-35.17	Peak	Vertical
	7638.50	36.99	8.04	45.03	74.00	-28.97	Peak	Vertical
*	8837.00	36.23	9.12	45.35	74.00	-28.65	Peak	Vertical
*	10324.50	35.22	12.11	47.33	74.00	-26.67	Peak	Vertical


Note 1: “\*” is not in restricted band, its limit is 20dBc of the fundamental emission level (85.6 dB $\mu$ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The worst case of Radiated Emission below 1GHz:**

Site: AC1	Time: 2017/04/22 - 16:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Will Yan
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: SENSOR TAG	Power: By Battery
<b>Worse Case Mode:</b> Transmit by BLE at channel 2402MHz	

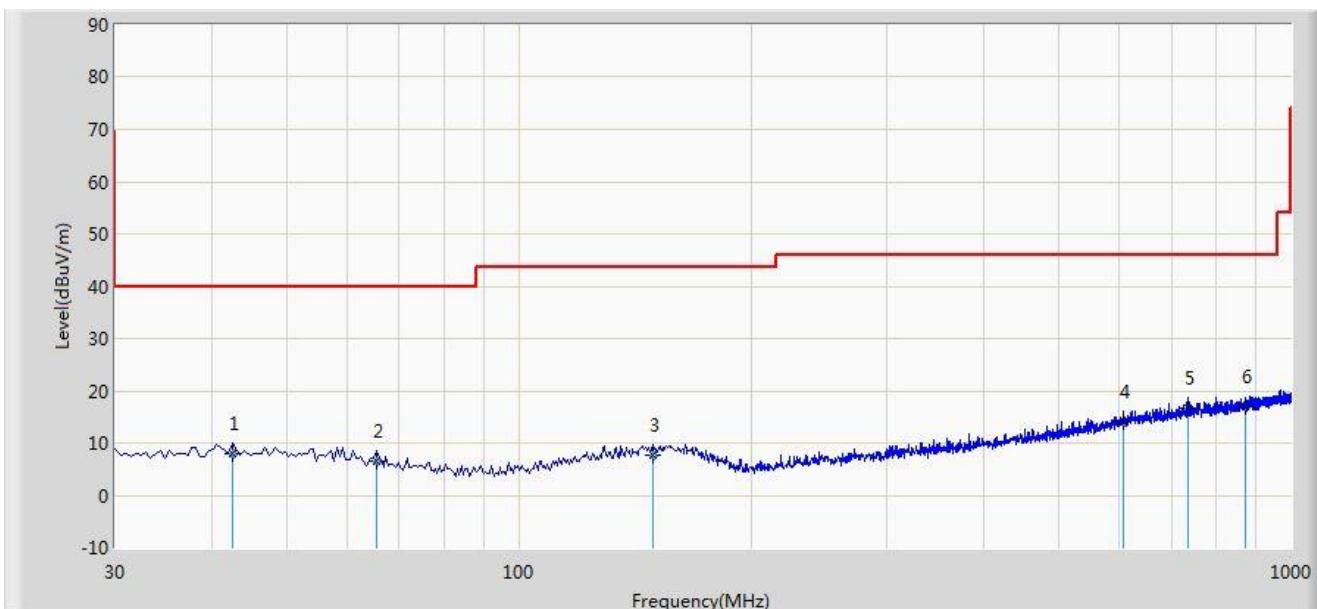


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			42.610	7.961	-6.390	-32.039	40.000	14.351	QP
2	*		65.405	6.593	-5.770	-33.407	40.000	12.362	QP
3			149.310	7.570	-7.540	-35.930	43.500	15.110	QP
4			607.150	13.974	-6.660	-32.026	46.000	20.634	QP
5			737.130	16.631	-5.920	-29.369	46.000	22.551	QP
6			872.445	16.829	-7.125	-29.171	46.000	23.955	QP

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/04/22 - 17:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Will Yan
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: SENSOR TAG	Power: By Battery
<b>Worse Case Mode:</b> Transmit by BLE at channel 2402MHz	

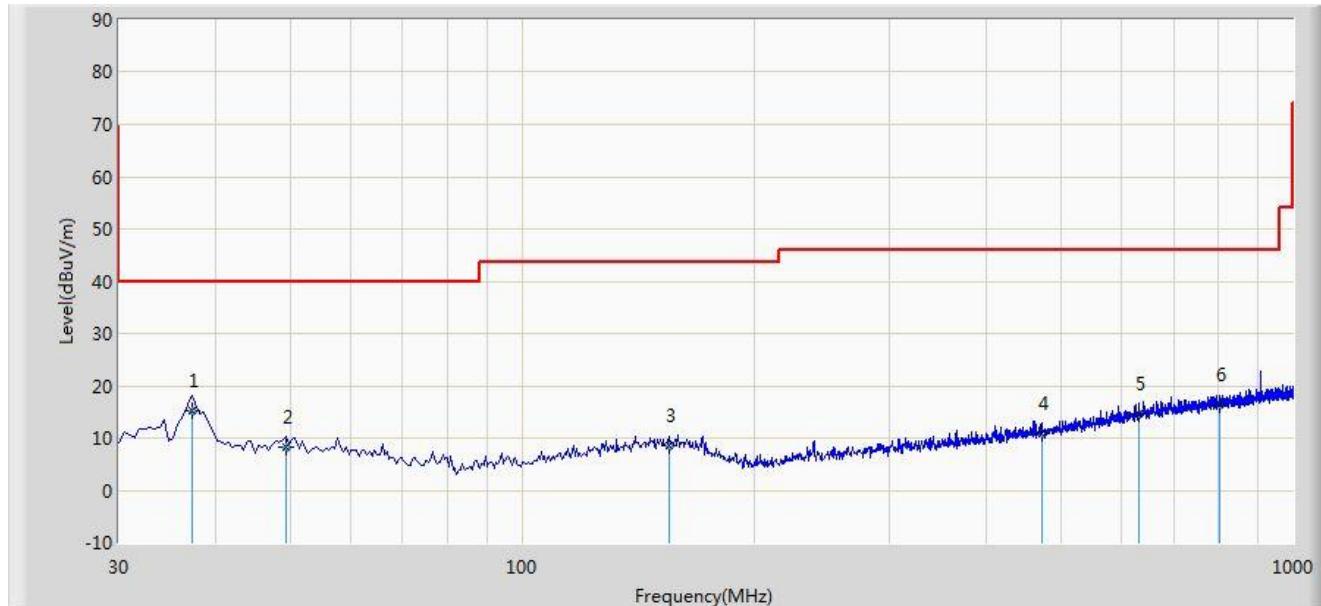

No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			37.275	15.192	1.036	-24.808	40.000	14.156	QP
2			49.400	8.295	-5.795	-31.705	40.000	14.090	QP
3			155.130	8.410	-6.775	-35.090	43.500	15.185	QP
4			472.805	10.887	-7.210	-35.113	46.000	18.096	QP
5			630.430	14.646	-6.450	-31.354	46.000	21.096	QP
6	*		804.060	16.248	-7.018	-29.752	46.000	23.266	QP


Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Result

Site: AC1	Time: 2017/04/22 - 09:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: SENSOR TAG	Power: By Battery
Note: Transmit by BLE at channel 2402MHz	

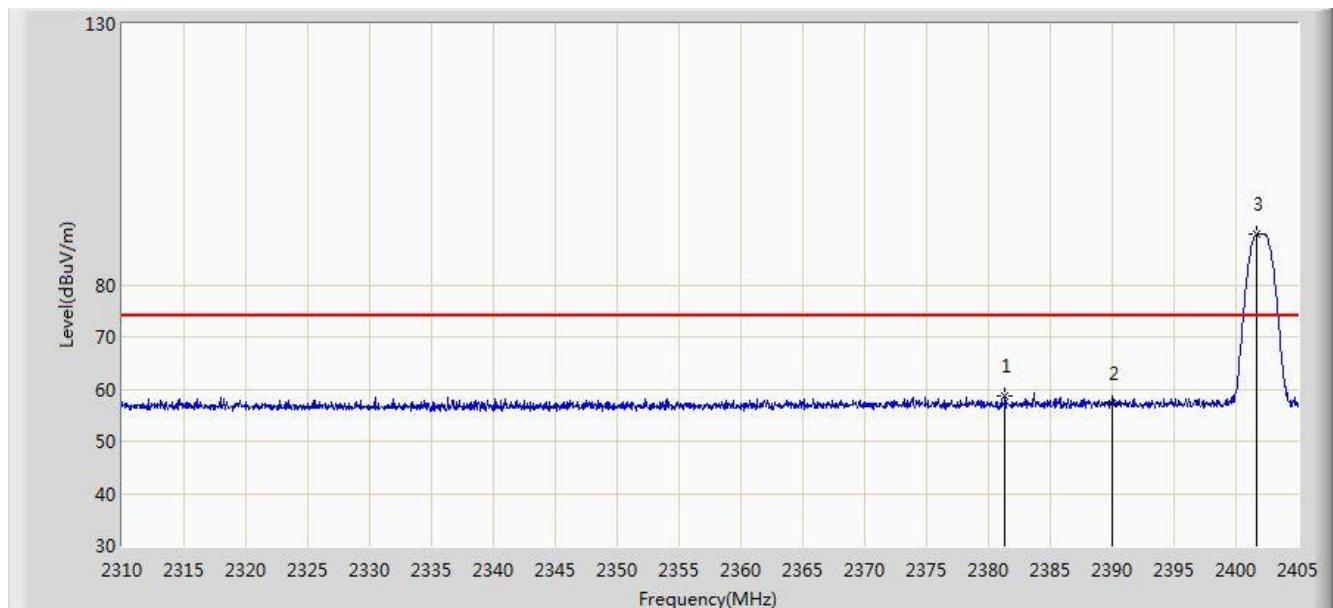


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.345	58.791	27.572	-15.209	74.000	31.218	PK
2			2390.000	57.238	26.035	-16.762	74.000	31.203	PK
3		*	2401.722	89.819	58.635	N/A	N/A	31.184	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/04/22 - 10:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: SENSOR TAG	Power: By Battery
Note: Transmit by BLE at channel 2402MHz	

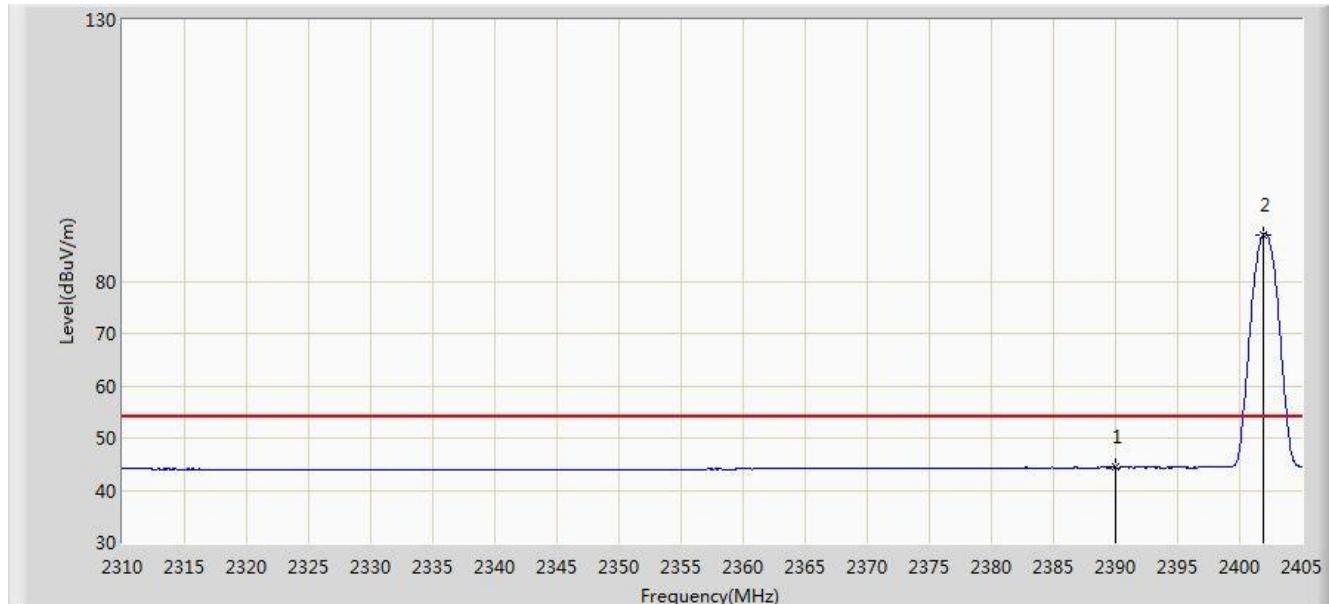


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2390.000	44.354	13.151	-9.646	54.000	31.203	AV
2	*		2401.913	88.922	57.738	N/A	N/A	31.184	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/04/22 - 10:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: SENSOR TAG	Power: By Battery
Note: Transmit by BLE at channel 2402MHz	

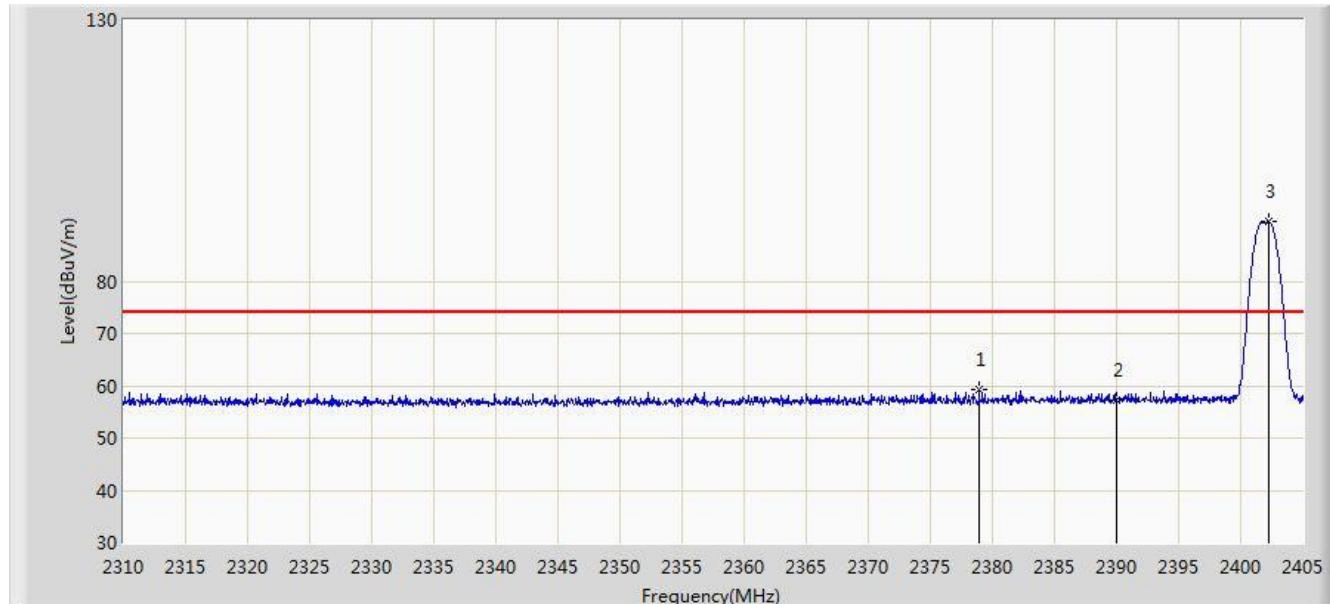


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2378.923	59.359	28.136	-14.641	74.000	31.223	PK
2			2390.000	57.384	26.181	-16.616	74.000	31.203	PK
3	*	*	2402.245	91.359	60.175	N/A	N/A	31.184	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/04/22 - 10:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: SENSOR TAG	Power: By Battery
Note: Transmit by BLE at channel 2402MHz	

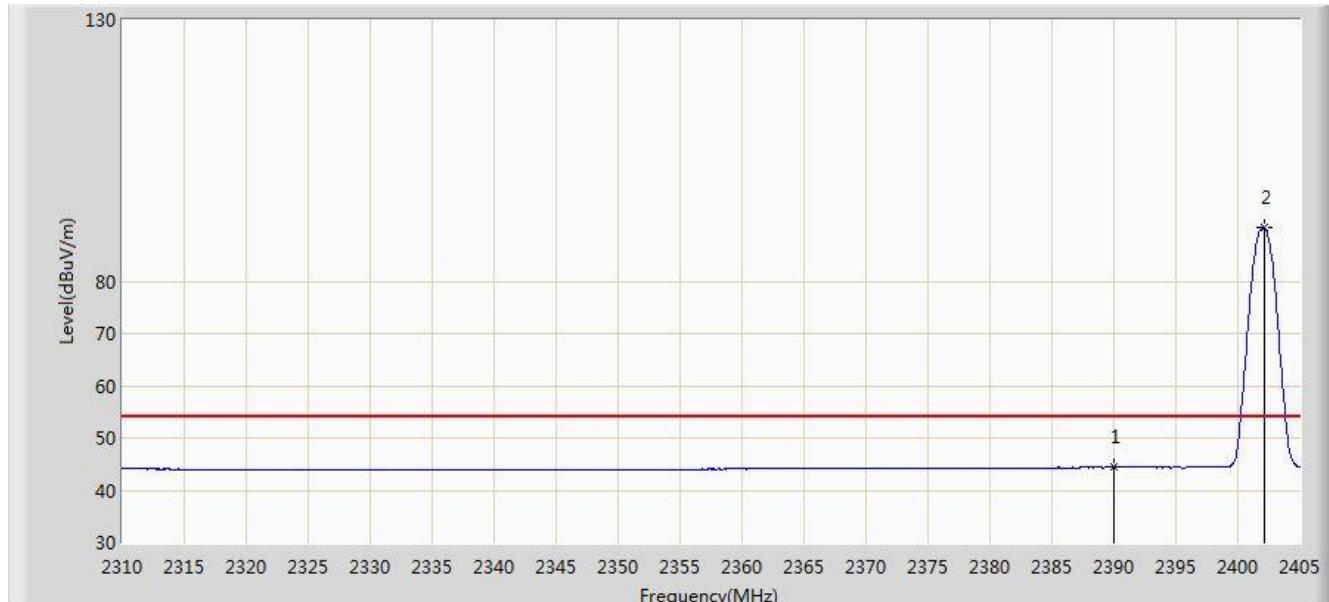


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2390.000	44.397	13.194	-9.603	54.000	31.203	AV
2	*		2402.150	90.301	59.117	N/A	N/A	31.184	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/04/22 - 10:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: SENSOR TAG	Power: By Battery
Note: Transmit by BLE at channel 2480MHz	

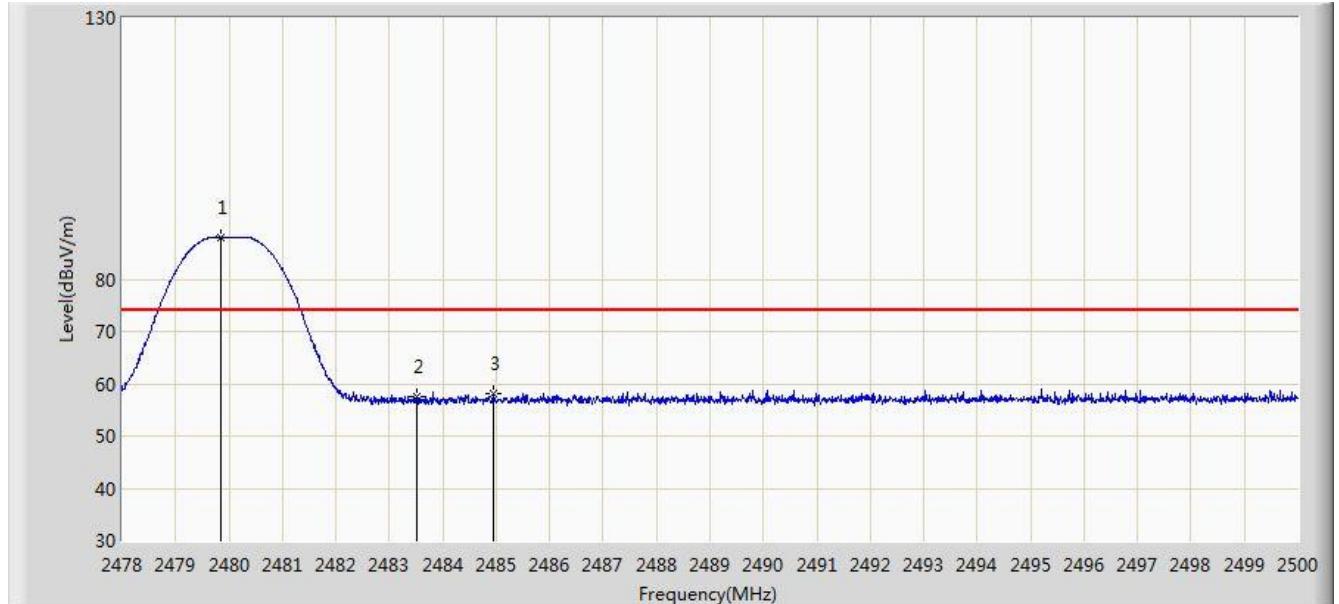

No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1	*		2479.837	88.062	56.878	N/A	N/A	31.184	PK
2			2483.500	57.423	26.230	-16.577	74.000	31.194	PK
3			2484.941	58.139	26.942	-15.861	74.000	31.197	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/04/22 - 10:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: SENSOR TAG	Power: By Battery
Note: Transmit by BLE at channel 2480MHz	



No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1		*	2480.046	87.041	55.857	N/A	N/A	31.184	AV
2			2483.500	43.987	12.794	-10.013	54.000	31.194	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/04/22 - 10:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: SENSOR TAG	Power: By Battery
Note: Transmit by BLE at channel 2480MHz	



No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1		*	2479.804	89.784	58.600	N/A	N/A	31.184	PK
2			2483.500	57.196	26.003	-16.804	74.000	31.194	PK
3			2485.480	57.803	26.604	-16.197	74.000	31.198	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/04/22 - 10:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: SENSOR TAG	Power: By Battery
Note: Transmit by BLE at channel 2480MHz	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	89.095	57.911	N/A	N/A	31.184	AV
2			2483.500	44.179	12.986	-9.821	54.000	31.194	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **SENSOR TAG** is in compliance with Part 15C of the FCC Rules and RSS-247 Rule..

---

The End

---