

FCC RADIO TEST REPORT

Prepared For	12th Man Technologies, Inc.
Product Name:	CareConnect
Trade Name:	CareConnect
Model Name :	CareConnect-01
FCC ID:	R5LCARECONNECT-01
Prepared By	DongGuan Precise Testing Service Co.,Ltd.
	Room 203-204, 2F, Xinye Building, No.67 Shijing,Guanzhang Road, Dongguan, China
Report No.	PTS2012111541F2
Test Date:	Nov. 01 ~ Nov 11, 2012
Date of Report :	Nov 11, 2012

**VERIFICATION OF COMPLIANCE**

Applicant:	12 th Man Technologies, Inc.
Address	7245 Garden Grove Blvd, Suite C, Garden Grove, CA 92841,USA
Manufacturer Name:	Shenzhen PITAYA technology CO.,LTD
Address:	Shandong Building A,2102,Nanhai Road,Nanshan District,Shenzhen,China
Product Description:	CareConnect
Brand Name:	CareConnect
Model Name:	CareConnect-01
Model difference:	N/A
Test procedure	ANSI C63.4-2003, KDB558074
Standards	FCC Part15.247

Prepared by :

Assistant

Reviewer :

Supervisor

Approved & Authorized Signer :

Jacky Ou / Manager

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	19
3.2.1 RADIATED EMISSION LIMITS	19
3.2.2 TEST PROCEDURE	20
3.2.3 DEVIATION FROM TEST STANDARD	20
3.2.4 TEST SETUP	21
3.2.5 EUT OPERATING CONDITIONS	22
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	23
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	24
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	26
4 . POWER SPECTRAL DENSITY TEST	56
4.1 APPLIED PROCEDURES / LIMIT	56
4.1.1 TEST PROCEDURE	56
4.1.2 DEVIATION FROM STANDARD	56
4.1.3 TEST SETUP	56
4.1.4 EUT OPERATION CONDITIONS	56
4.1.5 TEST RESULTS	57
5 . BANDWIDTH TEST	63
5.1 APPLIED PROCEDURES / LIMIT	63

Table of Contents

	Page
5.1.1 TEST PROCEDURE	63
5.1.2 DEVIATION FROM STANDARD	63
5.1.3 TEST SETUP	63
5.1.4 EUT OPERATION CONDITIONS	63
5.1.5 TEST RESULTS	64
6 . PEAK OUTPUT POWER TEST	70
6.1 APPLIED PROCEDURES / LIMIT	70
6.1.1 TEST PROCEDURE	70
6.1.2 DEVIATION FROM STANDARD	70
6.1.3 TEST SETUP	70
6.1.4 EUT OPERATION CONDITIONS	70
6.1.5 TEST RESULTS	71
7 . ANTENNA REQUIREMENT	72
7.1 STANDARD REQUIREMENT	72
7.2 EUT ANTENNA	72
8 . EUT TEST PHOTO	73
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	CareConnect														
Trade Name	CareConnect														
Model Name	CareConnect-01														
Model Difference	N/A														
Product Description	The EUT is a CareConnect <table border="1"> <tr> <td>Operation Frequency:</td><td>802.11b/g/n:2412~2462 MHz</td></tr> <tr> <td>Modulation Type:</td><td>CCK/OFDM/DBPSK/DAPSK</td></tr> <tr> <td>Bit Rate of Transmitter</td><td>802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n: 72.2/65/58.5/57.8/52/43.3/39/28.9/26/21.7/19.5/14.4/13/7.2/6.5Mbps</td></tr> <tr> <td>Number Of Channel</td><td>802.11b/g/n: 11CH</td></tr> <tr> <td>Antenna Designation:</td><td>Please see Note 3.</td></tr> <tr> <td>Output Power(Conducted):</td><td>802.11b: 11.89 dBm (Max.) 802.11g: 10.78 dBm (Max.) 802.11n: 9.92 dBm (Max.)</td></tr> <tr> <td>Antenna Gain (dBi)</td><td>1.0 dBi</td></tr> </table> Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	Operation Frequency:	802.11b/g/n:2412~2462 MHz	Modulation Type:	CCK/OFDM/DBPSK/DAPSK	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n: 72.2/65/58.5/57.8/52/43.3/39/28.9/26/21.7/19.5/14.4/13/7.2/6.5Mbps	Number Of Channel	802.11b/g/n: 11CH	Antenna Designation:	Please see Note 3.	Output Power(Conducted):	802.11b: 11.89 dBm (Max.) 802.11g: 10.78 dBm (Max.) 802.11n: 9.92 dBm (Max.)	Antenna Gain (dBi)	1.0 dBi
Operation Frequency:	802.11b/g/n:2412~2462 MHz														
Modulation Type:	CCK/OFDM/DBPSK/DAPSK														
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n: 72.2/65/58.5/57.8/52/43.3/39/28.9/26/21.7/19.5/14.4/13/7.2/6.5Mbps														
Number Of Channel	802.11b/g/n: 11CH														
Antenna Designation:	Please see Note 3.														
Output Power(Conducted):	802.11b: 11.89 dBm (Max.) 802.11g: 10.78 dBm (Max.) 802.11n: 9.92 dBm (Max.)														
Antenna Gain (dBi)	1.0 dBi														
Channel List	Please refer to the Note 2.														
Ratings	DC 3.7V														
Adapter1:															
Adapter2:															
Battery	Rated Voltage: 3.7V Charge Limit: 4.2V Capacity :1100mAh														
Connecting I/O Port(s)	Please refer to the User's Manual														

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	Chip Antenna	N/A	1.0	N/A

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n CH1/ CH6/ CH11
Mode 4	WIFI Link Mode(Adapter1)
Mode 5	WIFI Link Mode(Adapter2)

For Conducted Emission	
Final Test Mode	Description
Mode 4	WIFI Link Mode(Adapter1)
Mode 5	WIFI Link Mode(Adapter2)


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n CH1/ CH6/ CH11

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

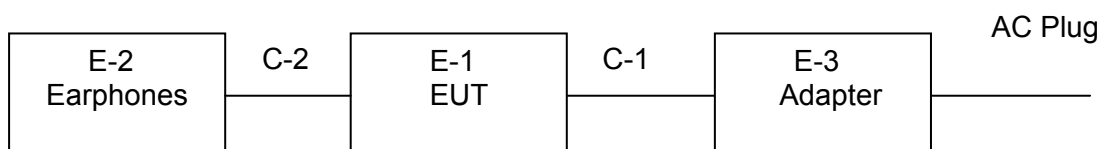

Radiated Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	CareConnect	N/A	CareConnect-01	N/A	EUT
E-2	Earphones	N/A	N/A	N/A	
E-3	Adapter	N/A	SP-13C0552400-U GP302U-050-200	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.8M	
C-2	NO	NO	0.8M	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	160400005	Jul. 06. 2013	1 year
2	Test Receiver	R&S	ESPI	101318	Jul. 06. 2013	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	Jul. 06. 2013	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	Jul. 06. 2013	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	Jul. 06. 2013	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	Jul. 06. 2013	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	Jul. 06. 2013	1 year
8	Amplifier	EM	EM-30180	060538	Jul. 06. 2013	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	Jul. 06. 2013	1 year
10	Power Meter	R&S	NRVS	100696	Jul. 06. 2013	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	Jul. 06. 2013	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	Jul. 06. 2013	1 year
2	LISN	R&S	ENV216	101313	Jul. 06. 2013	1 year
3	LISN	EMCO	3816/2	00042990	Jul. 06. 2013	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	Jul. 06. 2013	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	Jul. 06. 2013	1 year
6	Absorbing clamp	R&S	MOS-21	100423	Jul. 06. 2013	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

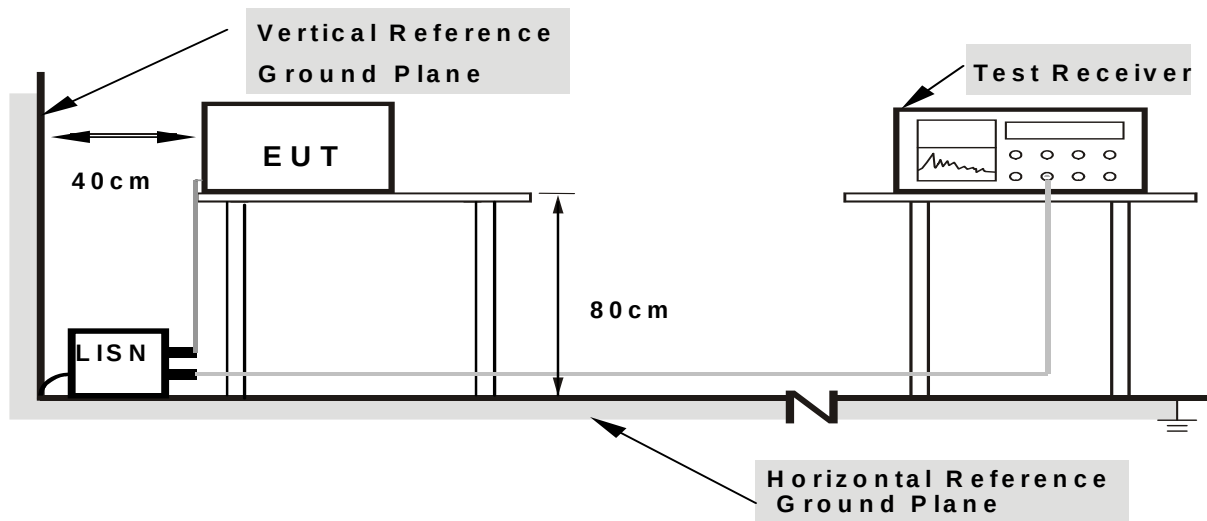

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 3.7V from adapter AC 120V/60Hz	Test Mode :	Mode 4

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.17	23.5	9.8	33.3	54.96	-21.66	AVG
0.186	49.17	9.79	58.96	64.21	-5.25	QP
1.222	40.86	10.16	51.02	56	-4.98	QP
1.2579	24.3	10.17	34.47	46	-11.53	AVG
6.794	33.69	10.43	44.12	60	-15.88	QP
7.866	21.95	10.4	32.35	50	-17.65	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

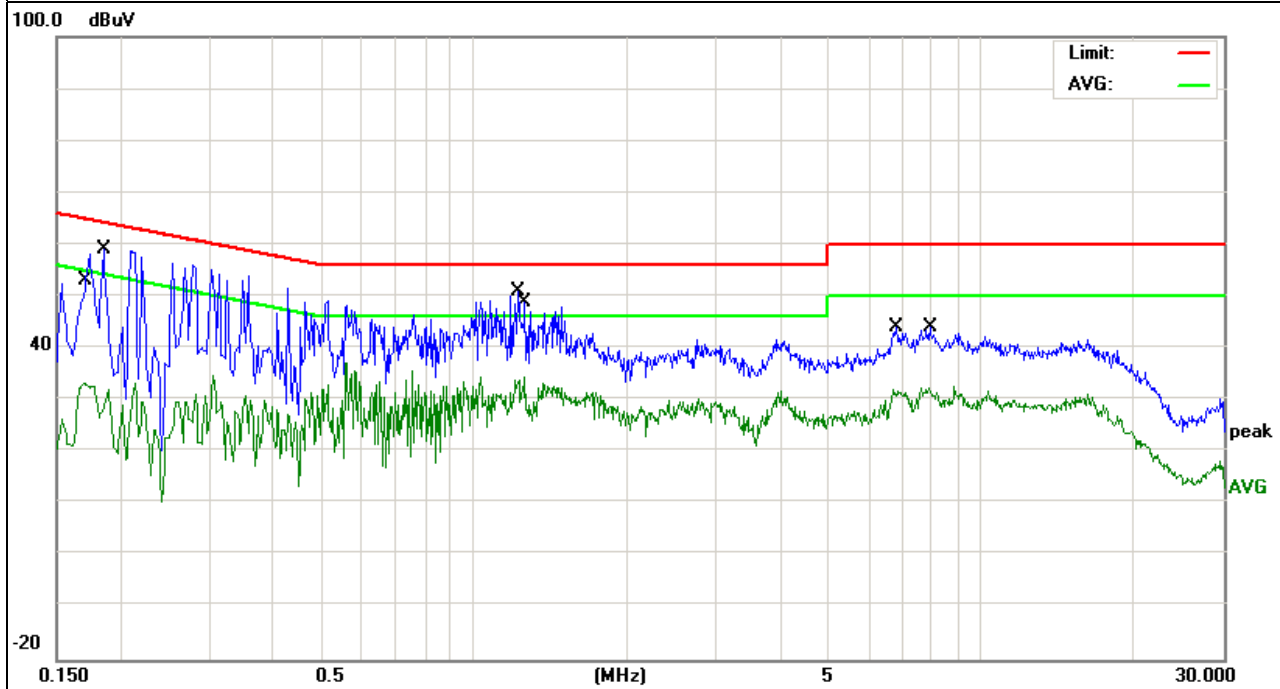




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 3.7V from adapter AC 120V/60Hz	Test Mode :	Mode 4

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.17	51.64	9.8	61.44	64.96	-3.52	QP
0.17	26.76	9.8	36.56	54.96	-18.4	AVG
0.47	41.67	10.16	51.83	56.51	-4.68	QP
0.562	27	10.2	37.2	46	-8.8	AVG
1.174	40.87	10.16	51.03	56	-4.97	QP
1.266	23.79	10.17	33.96	46	-12.04	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

100.0 dBμV

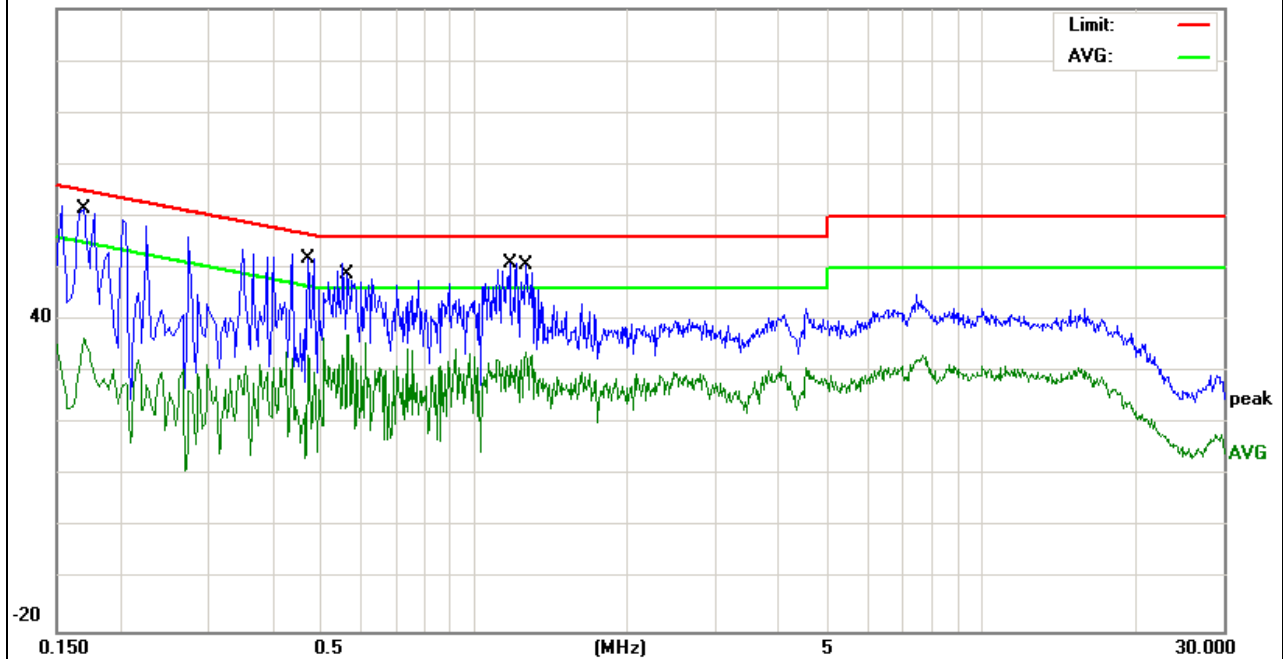




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 3.7V from adapter AC 120V/60Hz	Test Mode :	Mode 5

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.166	51.27	10.45	61.72	65.15	-3.43	QP
0.218	34.77	10.44	45.21	52.89	-7.68	AVG
1.39	37.7	10.41	48.11	56	-7.89	QP
1.622	33.17	10.42	43.59	46	-2.41	AVG
15.1379	41.02	10.71	51.73	60	-8.27	QP
19.1018	32.51	10.73	43.24	50	-6.76	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

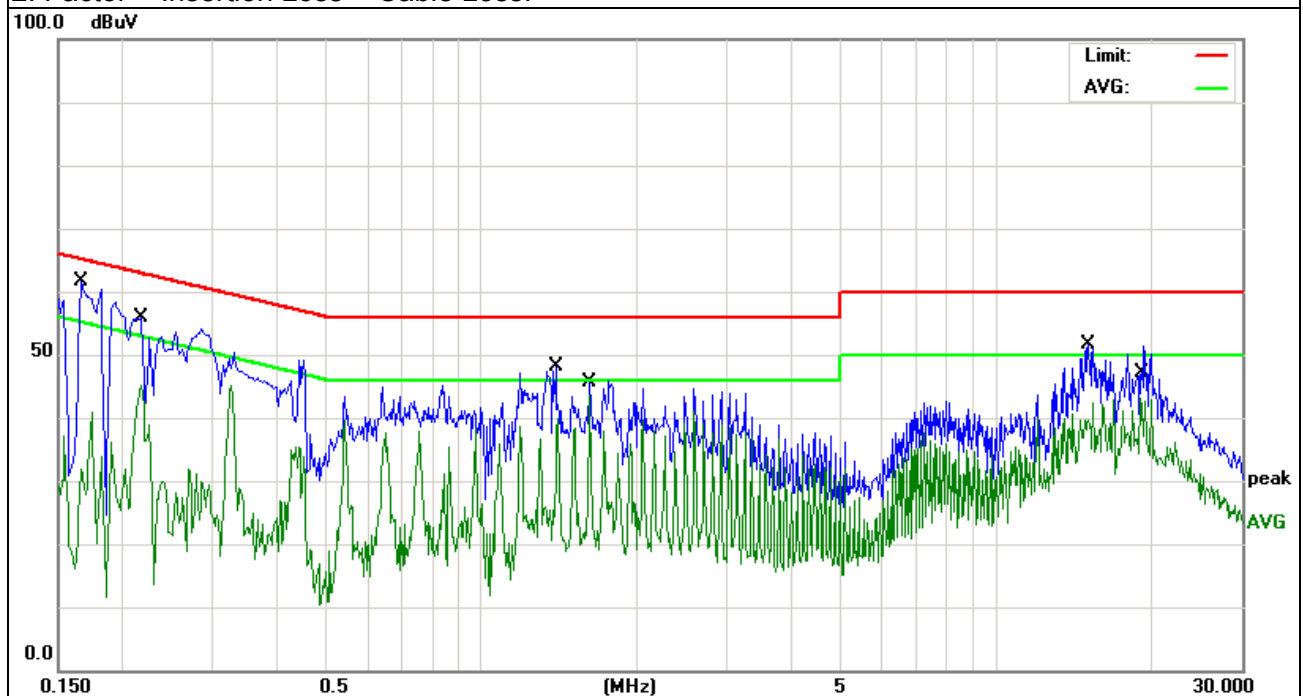




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 3.7V from adapter AC 120V/60Hz	Test Mode :	Mode 5

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.166	49.57	10.34	59.91	65.15	-5.24	QP
0.166	34.11	10.34	44.45	55.15	-10.7	AVG
0.878	42.17	10.43	52.6	56	-3.4	QP
0.974	29.4	10.45	39.85	46	-6.15	AVG
13.9059	32.7	10.72	43.42	50	-6.58	AVG
15.1419	41.94	10.73	52.67	60	-7.33	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

100.0 dBμV

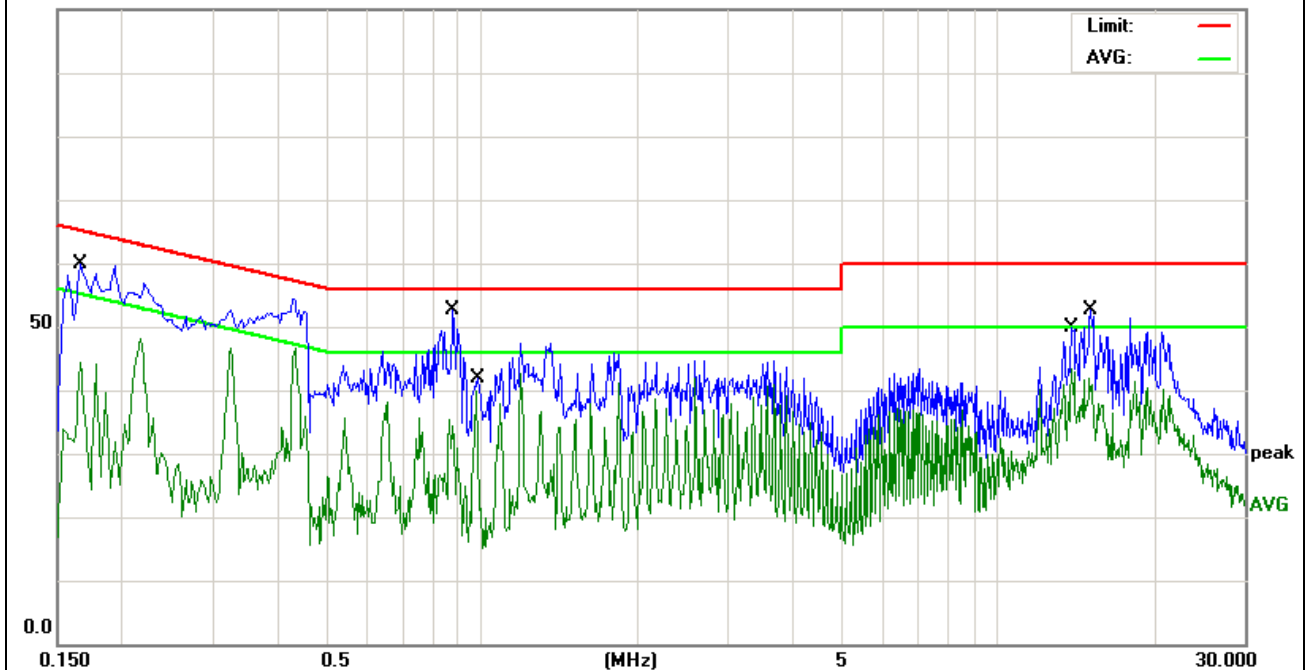

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

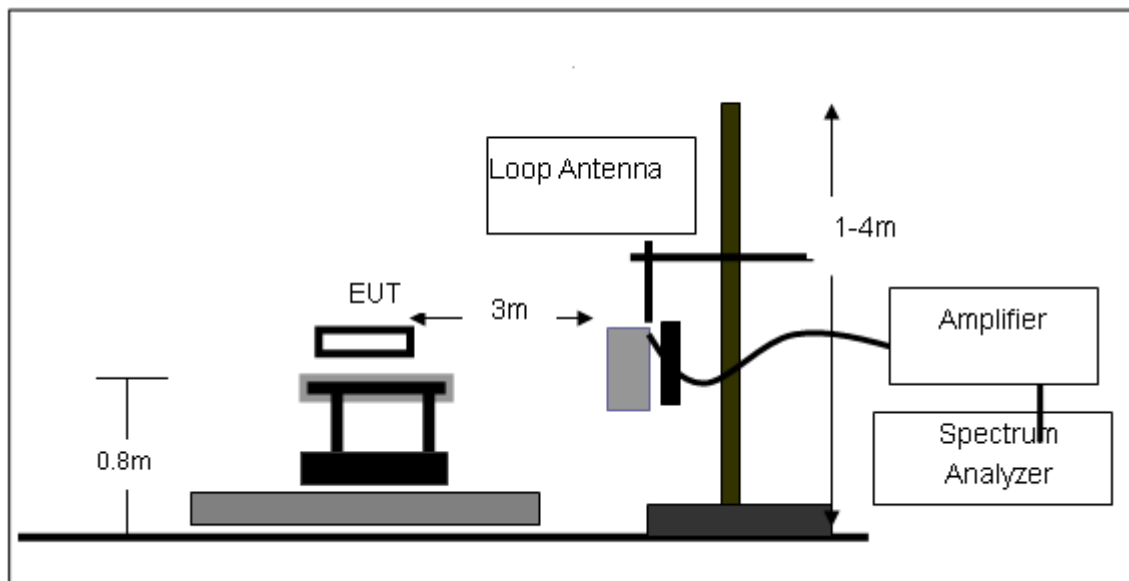

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

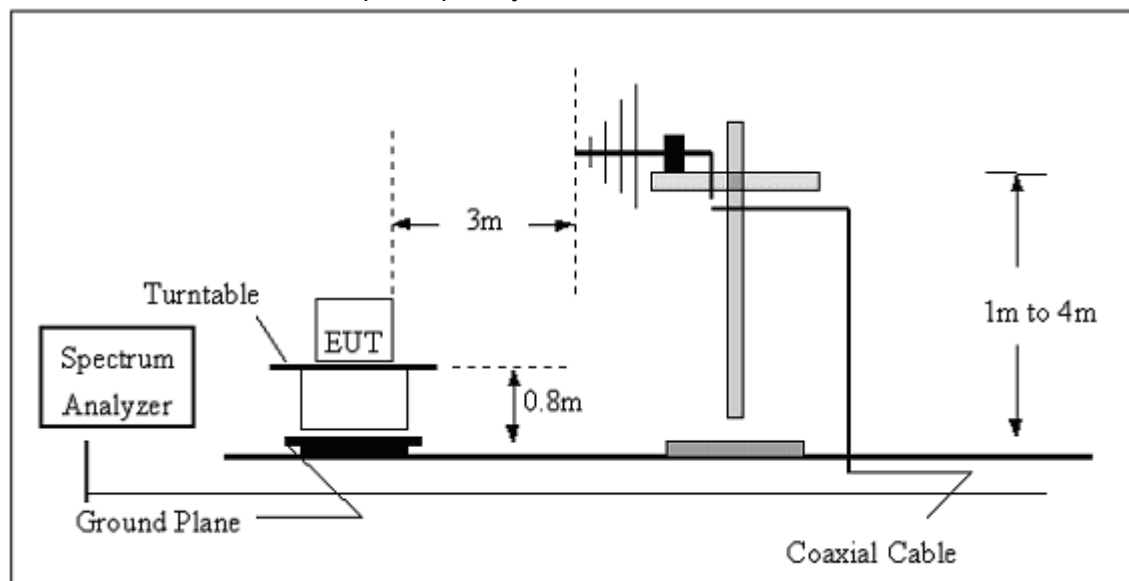

(C) Radiated Emission Test-Up Frequency Above 1GHz

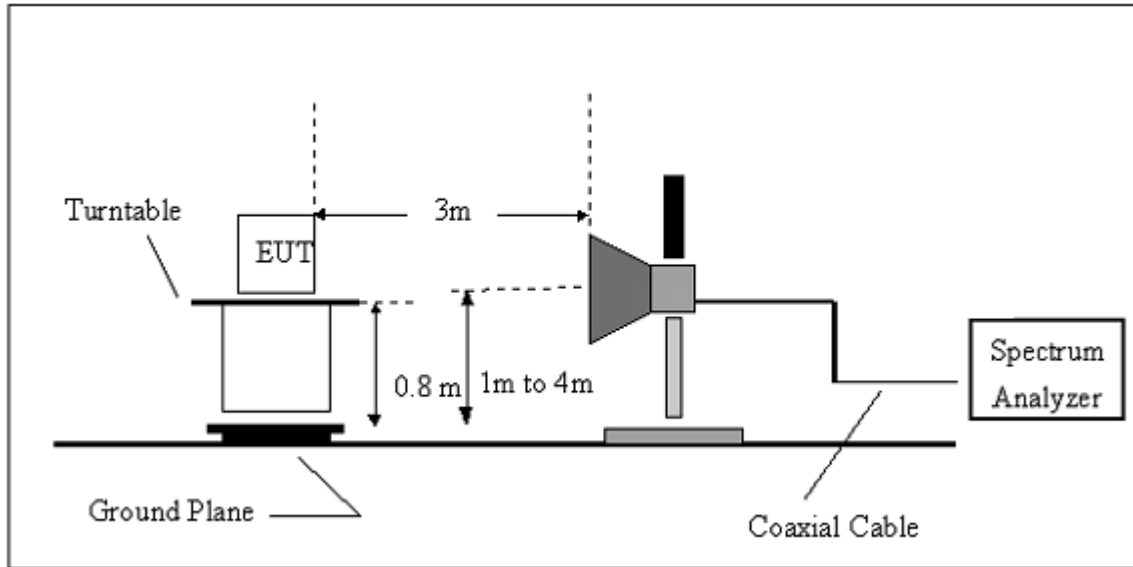

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	CareConnect	Model Name. :	CareConnect-01
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
31.2893	14.09	17.76	31.85	40	-8.15	peak
44.7433	16.29	10.73	27.02	40	-12.98	peak
97.456	19.46	10.33	29.79	43.5	-13.71	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

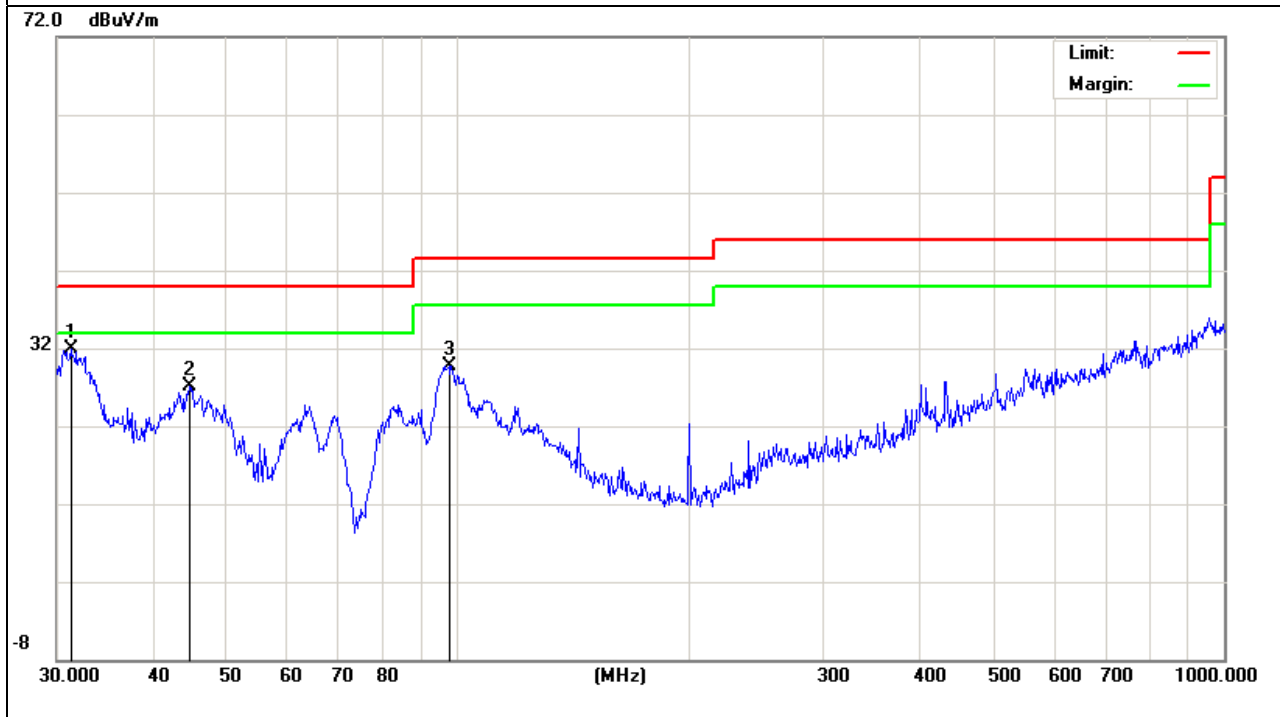




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
69.6004	10.11	6.07	16.18	40	-23.82	peak
119.8555	10.59	12.09	22.68	43.5	-20.82	peak
239.9874	21.73	11.65	33.38	46	-12.62	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

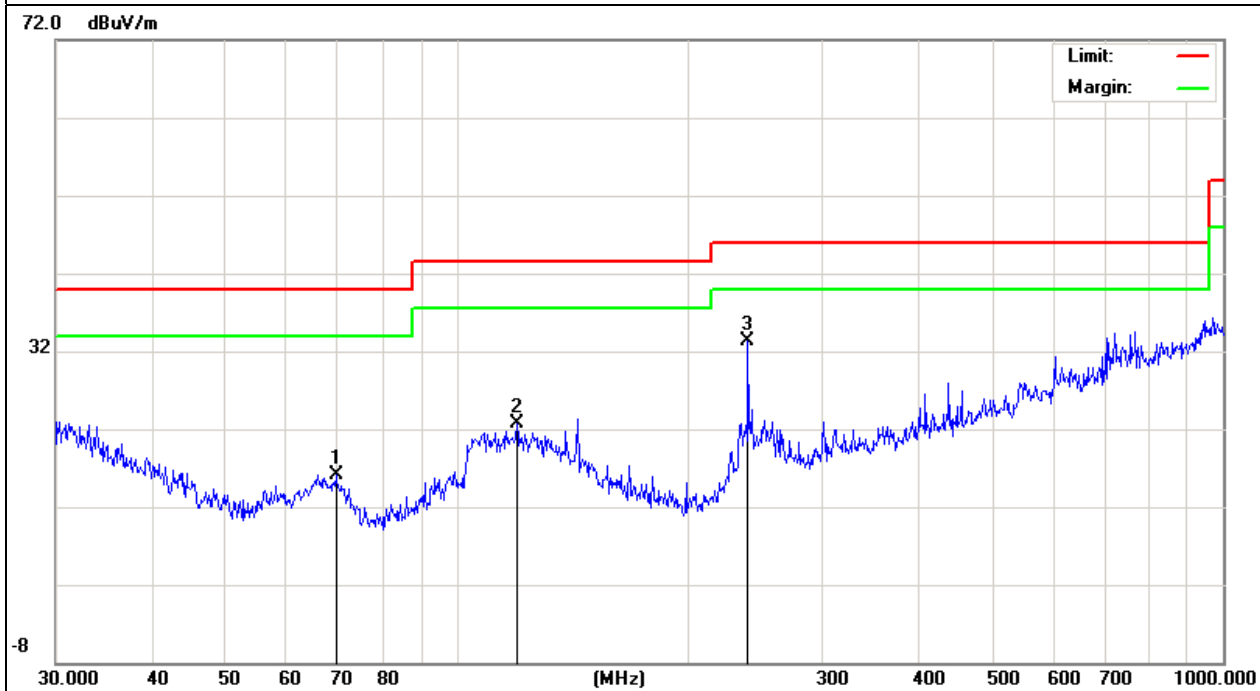


**3.2.8 TEST RESULTS (ABOVE 1000 MHZ)**

EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1 (802.11b Mode)/2412	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824.115	52.11	10.44	62.55	74	-11.45	peak
4824.115	33.32	10.44	43.76	54	-10.24	AVG
7236.058	44.32	12.39	56.71	74	-17.29	peak
7236.058	28.95	12.39	41.34	54	-12.66	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

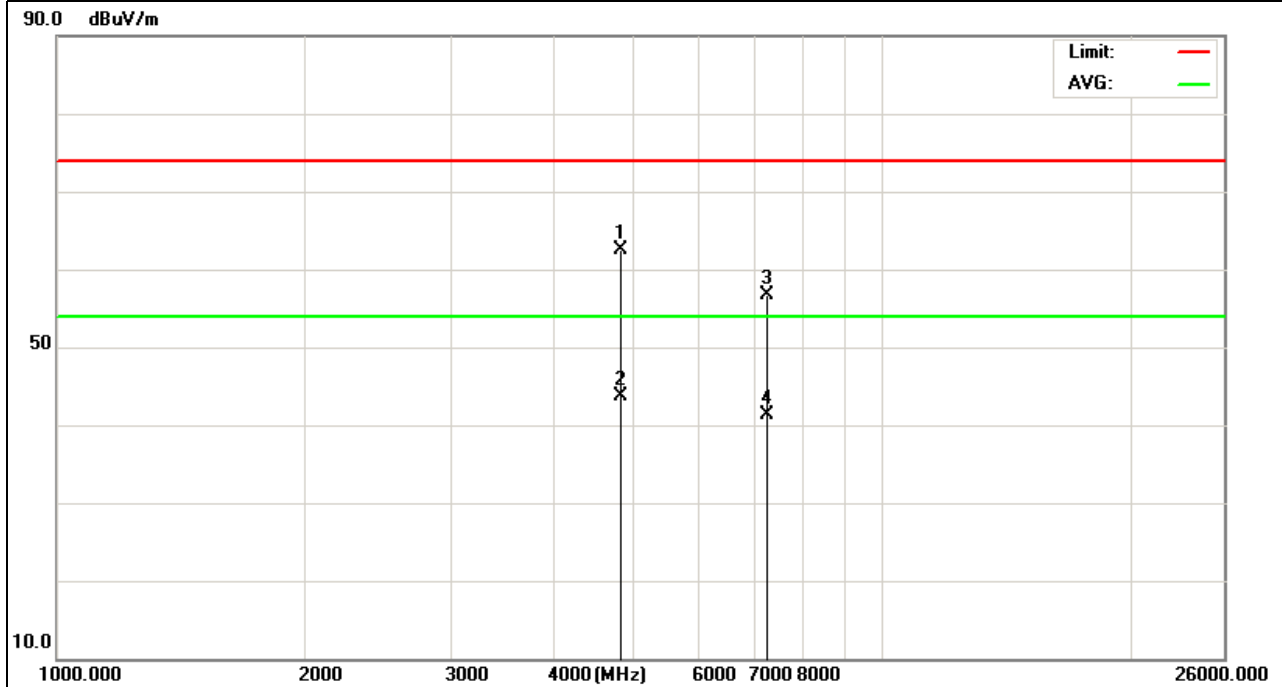




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1 (802.11b Mode)/2412	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.152	51.45	10.4	61.85	74	-12.15	peak
4874.152	31.84	10.4	42.24	54	-11.76	AVG
7311.366	41.63	12.75	54.38	74	-19.62	peak
7311.366	27.98	12.75	40.73	54	-13.27	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

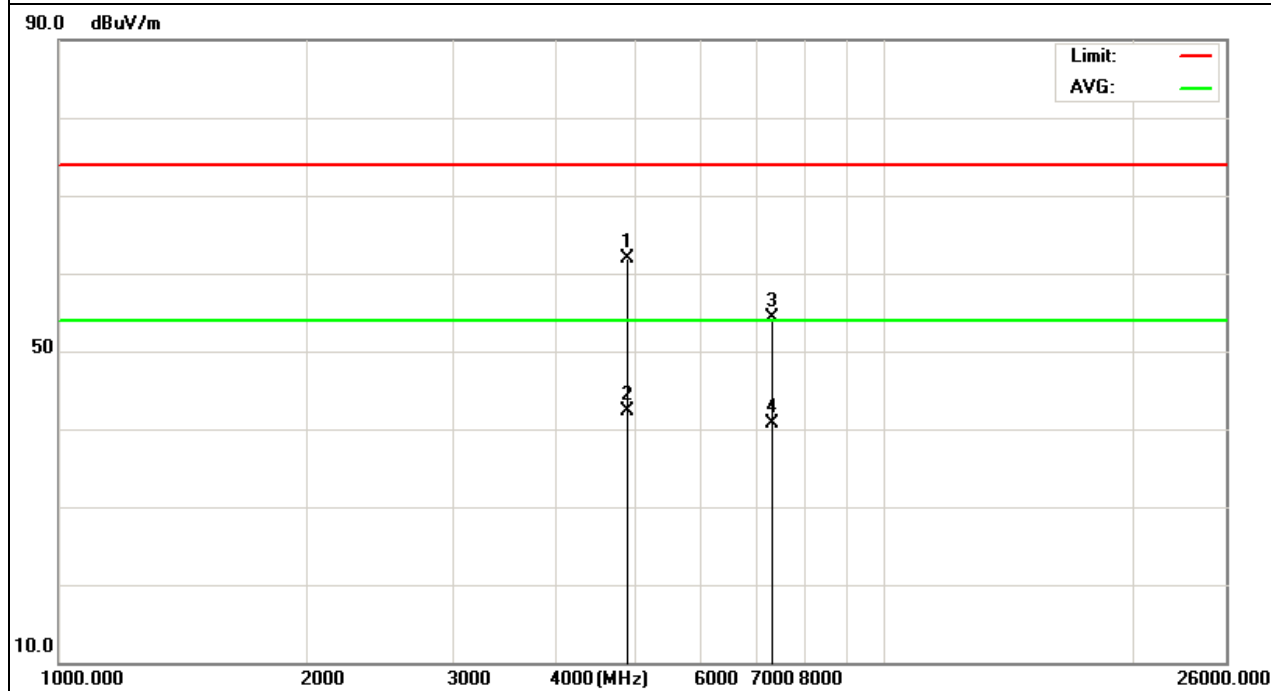




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH6 (802.11b Mode)/2437	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.237	50.54	10.4	60.94	74	-13.06	peak
4874.237	33.13	10.4	43.53	54	-10.47	AVG
7311.52	42.7	12.75	55.45	74	-18.55	peak
7311.52	29.92	12.75	42.67	54	-11.33	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

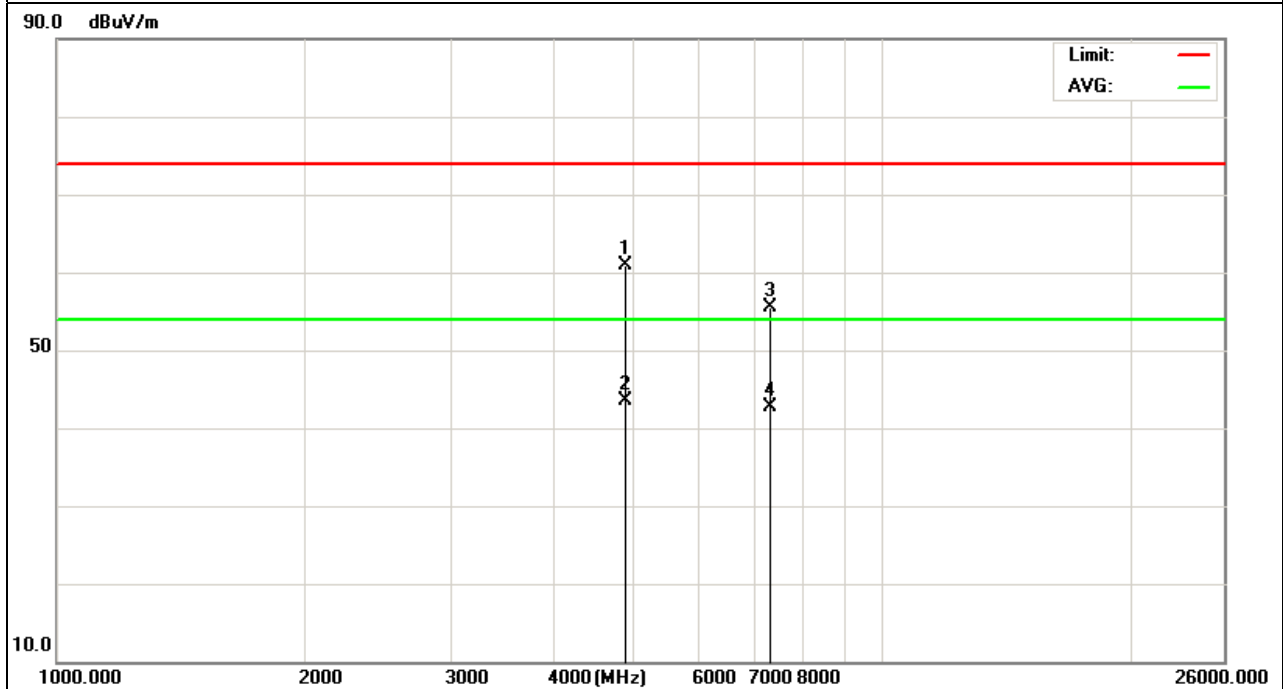




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH6 (802.11b Mode)/2437	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924.147	53.2	10.39	63.59	74	-10.41	peak
4934.147	32.23	10.44	42.67	54	-11.33	AVG
7386.252	43.05	12.68	55.73	74	-18.27	peak
7386.252	29.18	12.68	41.86	54	-12.14	AVG

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- No emission detected above 18GHz

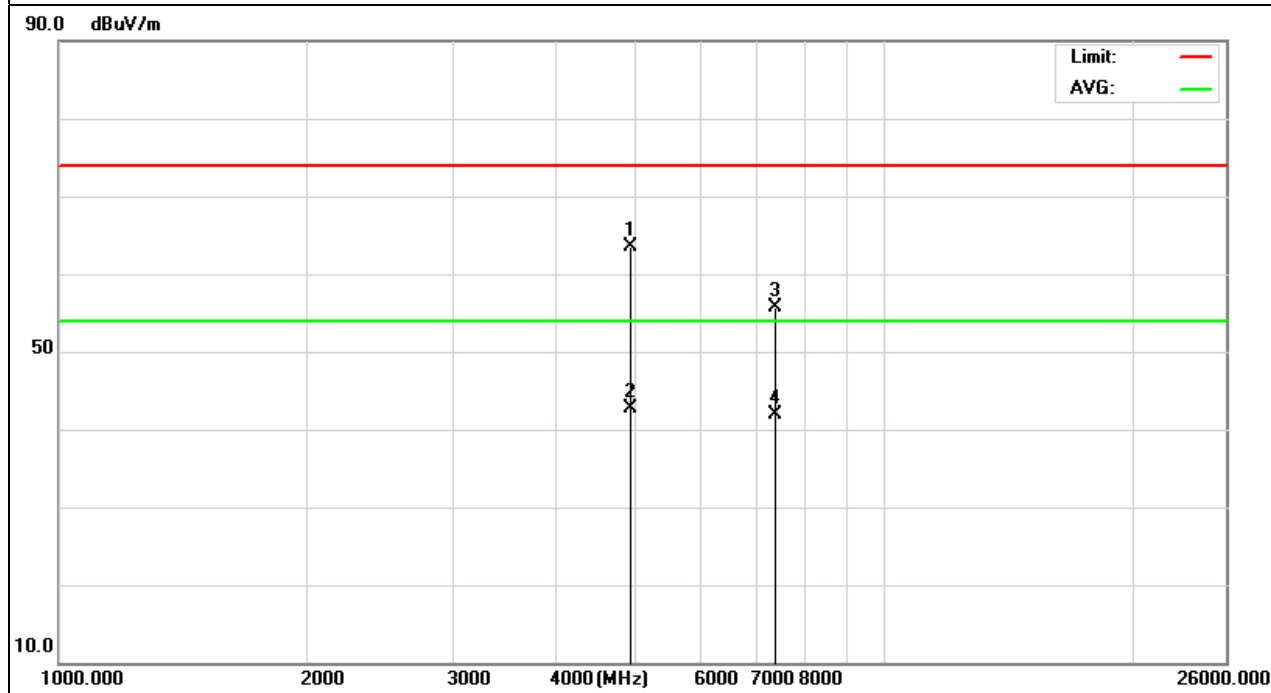




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH11 (802.11b Mode)/2462	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924.583	50.84	10.39	61.23	74	-12.77	peak
4924.583	33.38	10.39	43.77	54	-10.23	AVG
7386.374	42.68	12.69	55.37	74	-18.63	peak
7386.374	28.8	12.69	41.49	54	-12.51	AVG

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- No emission detected above 18GHz

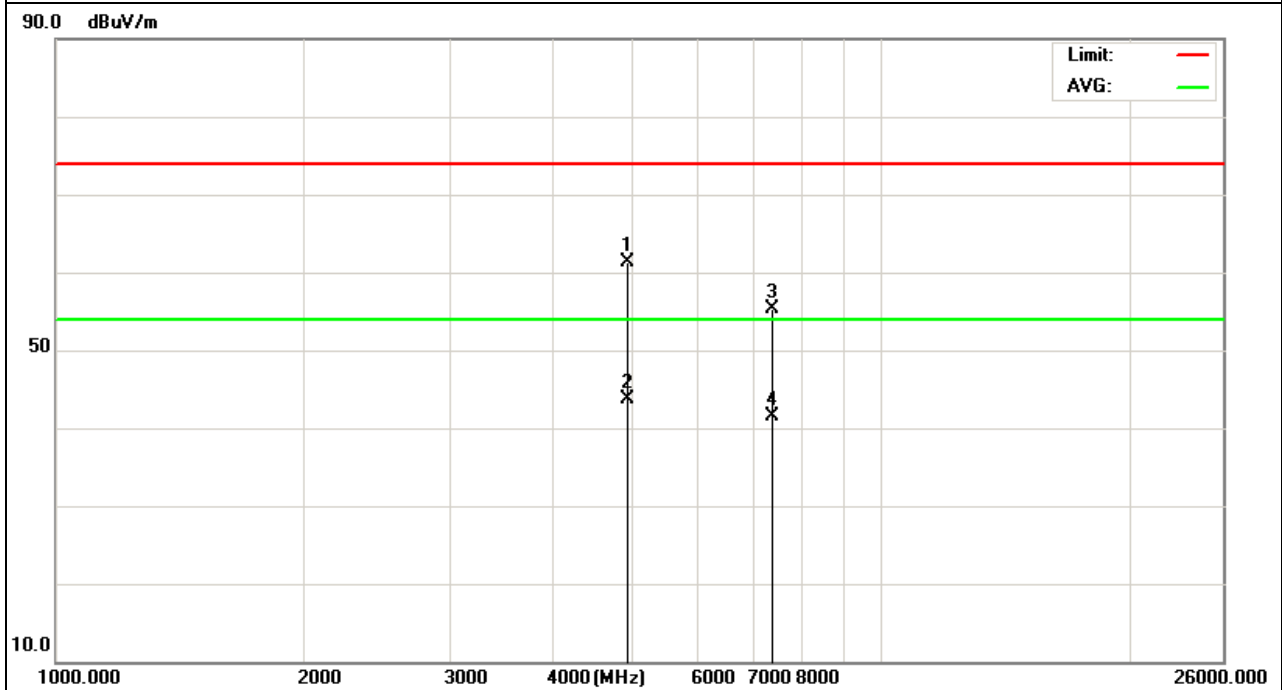




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH11 (802.11b Mode)/2462	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924.175	51.27	10.39	61.66	74	-12.34	peak
4924.175	32.46	10.39	42.85	54	-11.15	AVG
7386.141	42.79	12.68	55.47	74	-18.53	peak
7386.141	27.78	12.68	40.46	54	-13.54	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

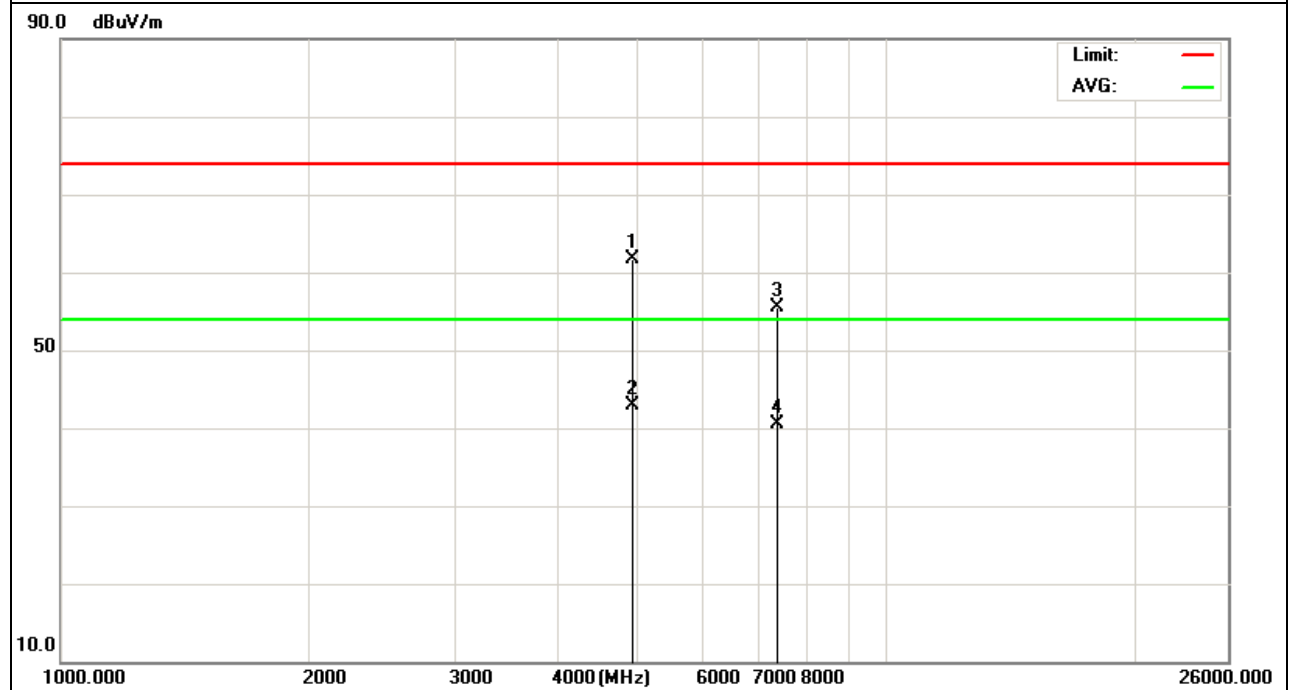




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1 (802.11g Mode)/2412	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824.375	46.86	10.44	57.3	74	-16.7	peak
4824.375	30.97	10.44	41.41	54	-12.59	AVG
7236.538	41.15	12.39	53.54	74	-20.46	peak
7236.538	26.47	12.39	38.86	54	-15.14	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

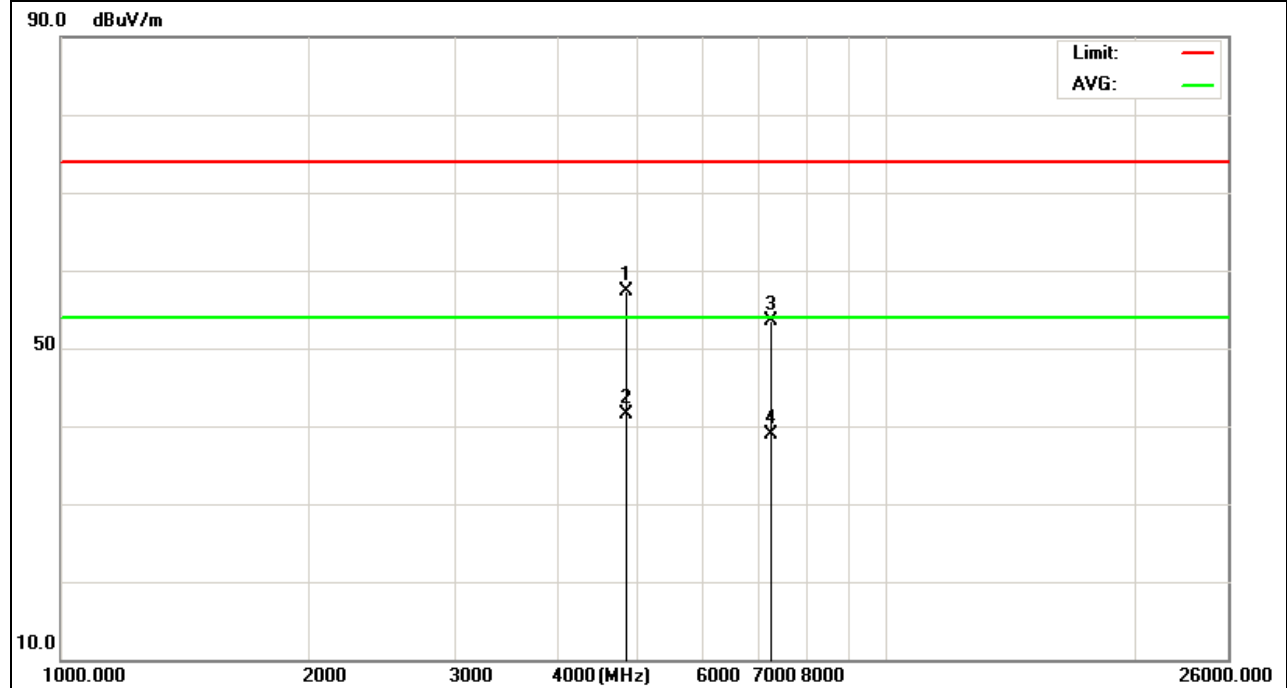




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1 (802.11g Mode)/2412	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824.157	48.4	10.44	58.84	74	-15.16	peak
4824.157	32.31	10.44	42.75	54	-11.25	AVG
7236.329	42.3	12.39	54.69	74	-19.31	peak
7236.329	28.46	12.39	40.85	54	-13.15	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

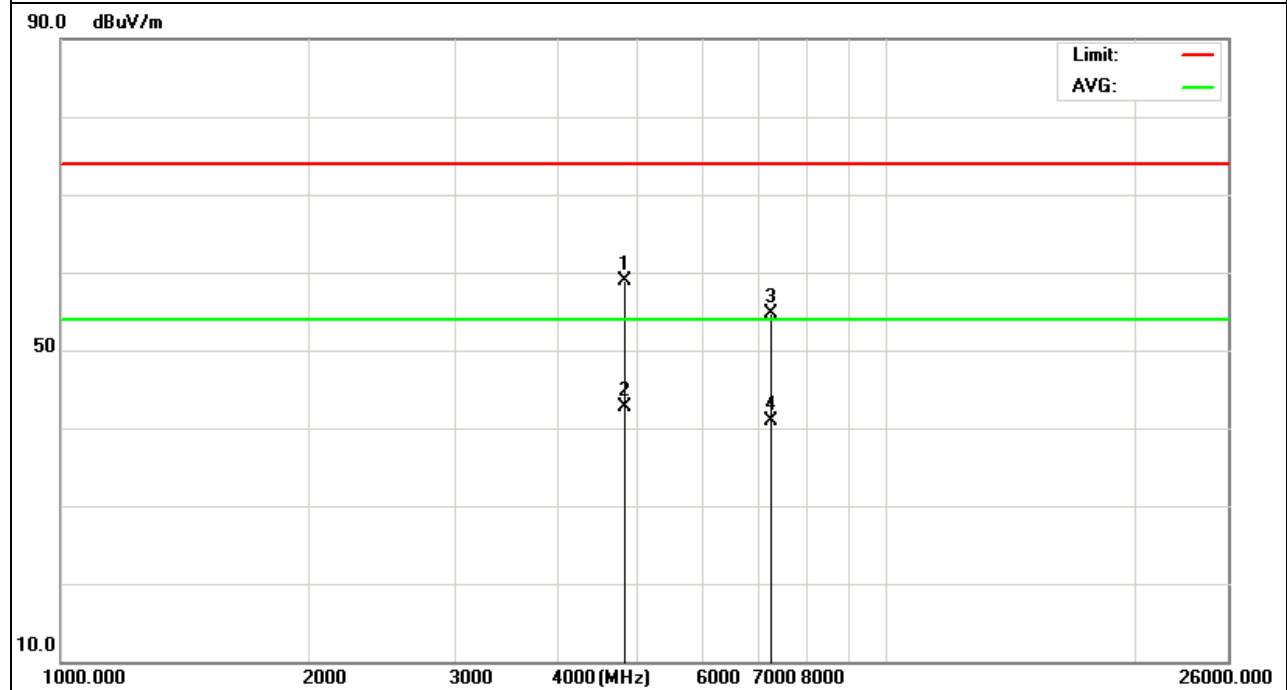




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH6 (802.11g Mode)/2437	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.424	48.27	10.4	58.67	74	-15.33	peak
4874.424	31.44	10.4	41.84	54	-12.16	AVG
7311.288	41.51	12.75	54.26	74	-19.74	peak
7311.288	26.83	12.75	39.58	54	-14.42	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

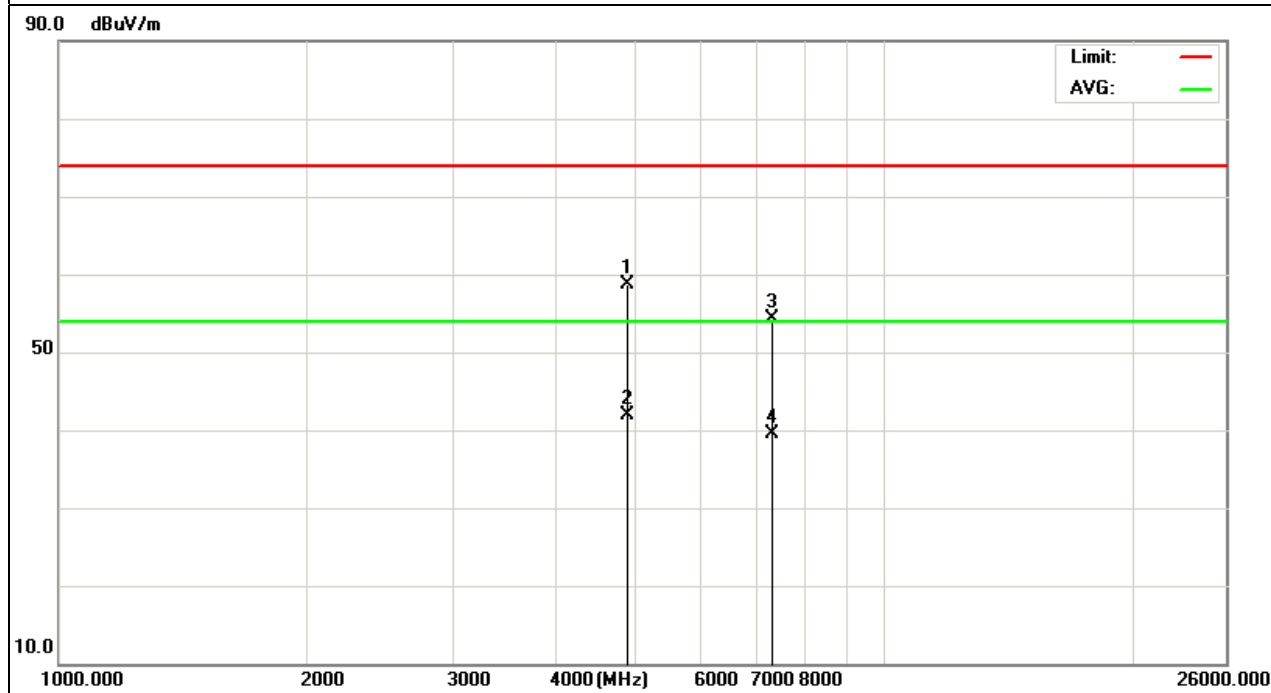




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH6 (802.11g Mode)/2437	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.164	48.44	10.4	58.84	74	-15.16	peak
4874.164	32.07	10.4	42.47	54	-11.53	AVG
7311.272	42.81	12.75	55.56	74	-18.44	peak
7311.272	28.55	12.75	41.3	54	-12.7	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

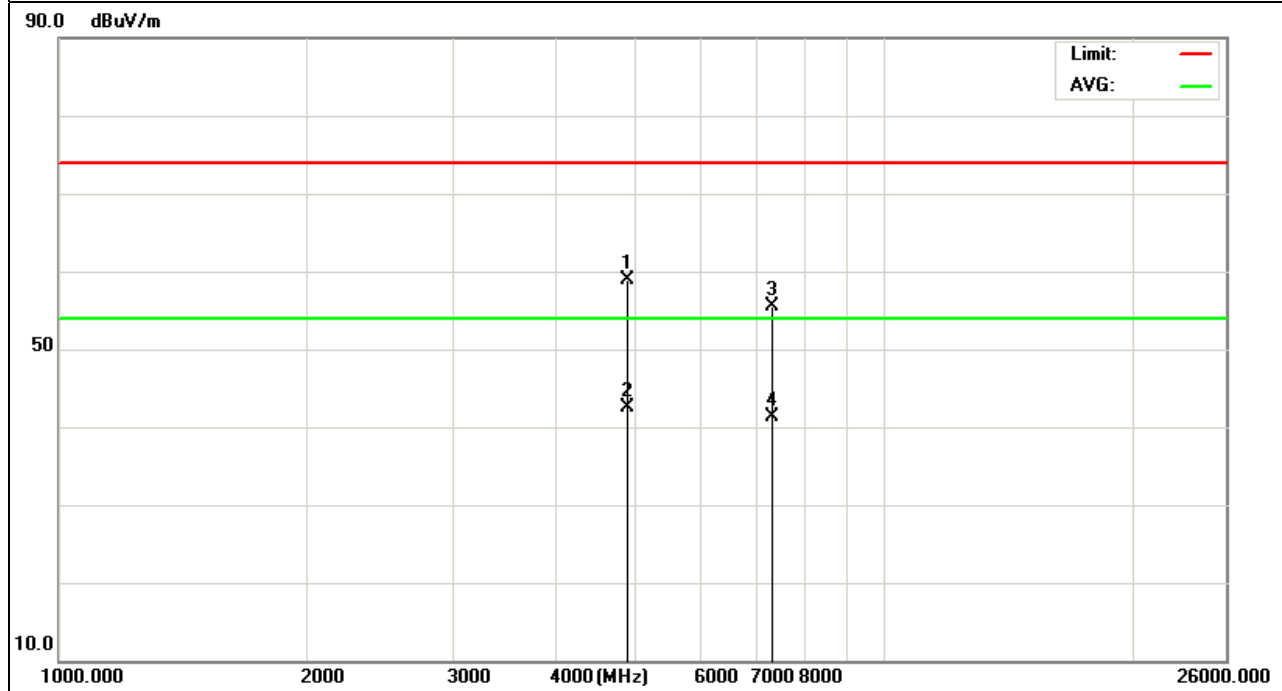




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH11 (802.11g Mode)/2462	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924.127	48.57	10.39	58.96	74	-15.04	peak
4924.127	33.46	10.39	43.85	54	-10.15	AVG
7386.211	42.46	12.68	55.14	74	-18.86	peak
7386.211	29.64	12.68	42.32	54	-11.68	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

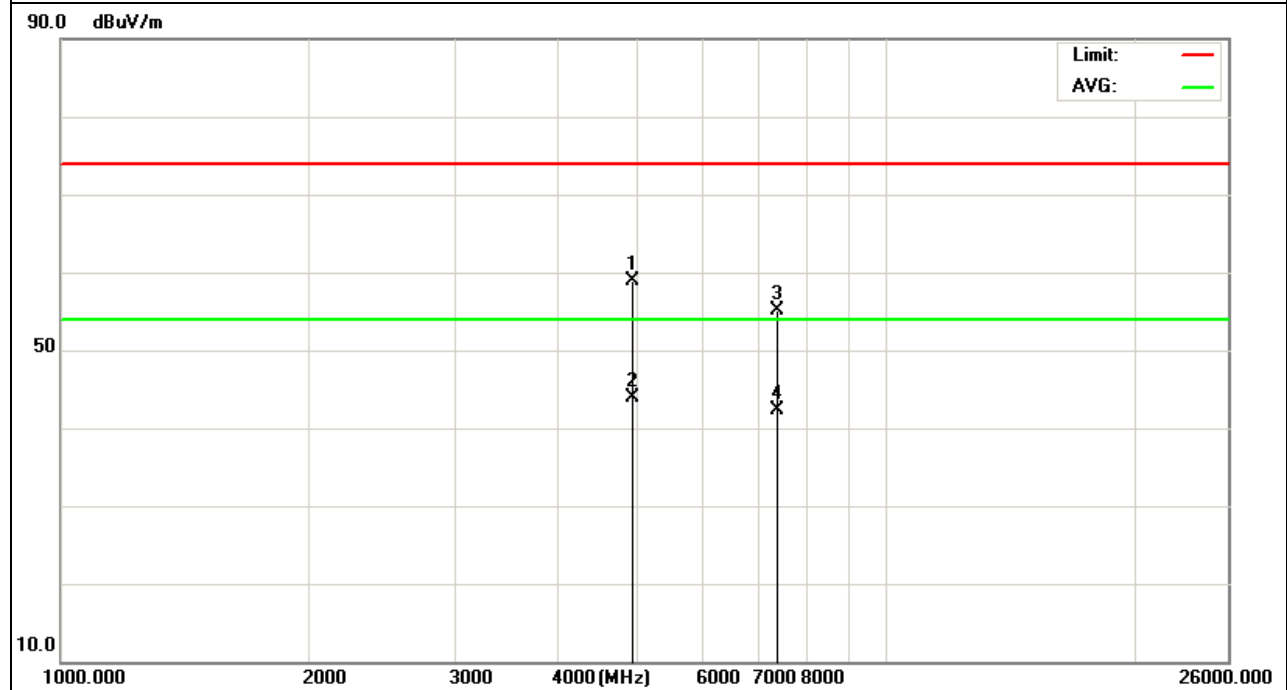




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH11(802.11g Mode)/2462	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924.147	47.08	10.39	57.47	74	-16.53	peak
4924.147	32.26	10.39	42.65	54	-11.35	AVG
7386.225	41.37	12.68	54.05	74	-19.95	peak
7386.225	28.64	12.68	41.32	54	-12.68	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

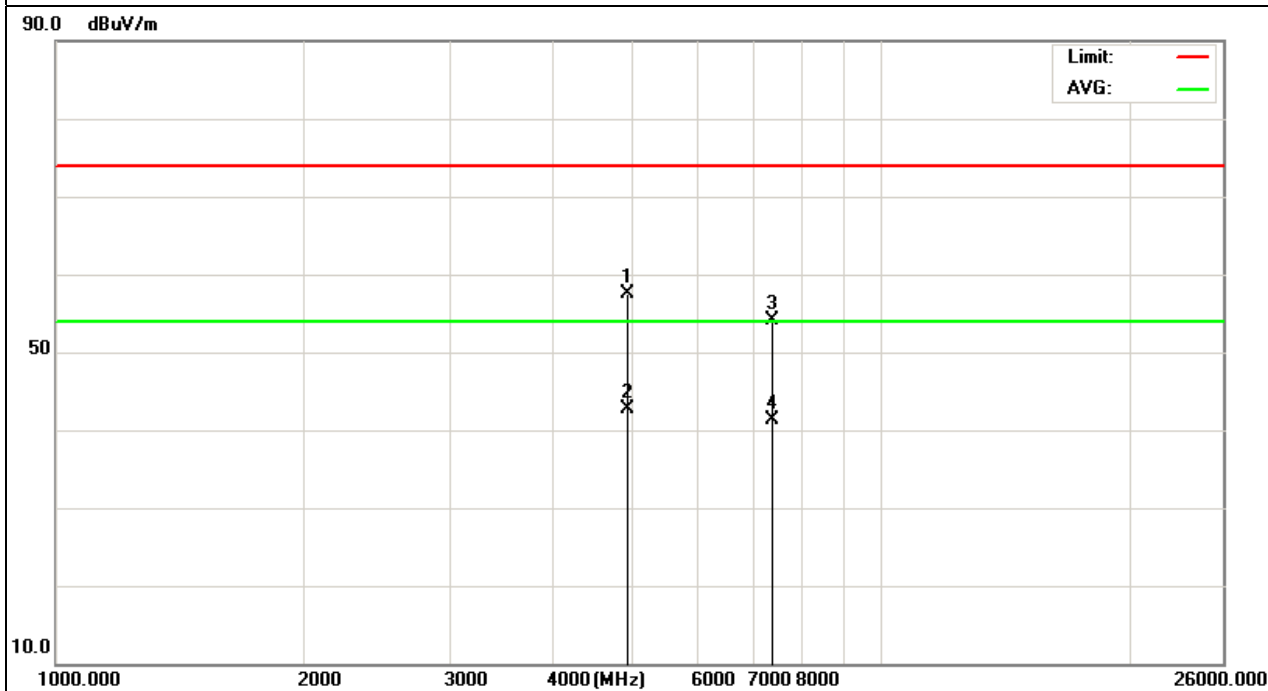




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1(802.11n Mode)/20MHz	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824.157	49.05	10.44	59.49	74	-14.51	peak
4824.157	33.18	10.44	43.62	54	-10.38	AVG
7236.036	41.43	12.39	53.82	74	-20.18	peak
7236.036	29.24	12.39	41.63	54	-12.37	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

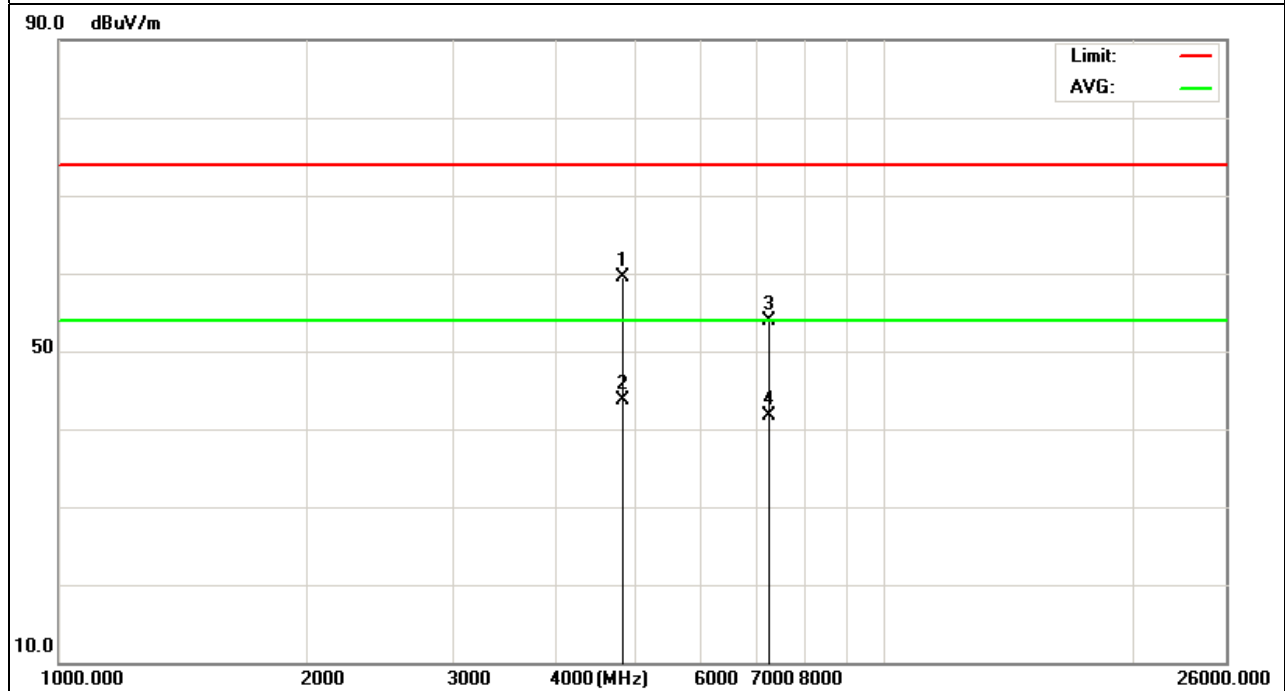




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1(802.11n Mode)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824.418	48.21	10.44	58.65	74	-15.35	peak
4824.418	32.27	10.44	42.71	54	-11.29	AVG
7236.289	41.97	12.39	54.36	74	-19.64	peak
7236.289	28.03	12.39	40.42	54	-13.58	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

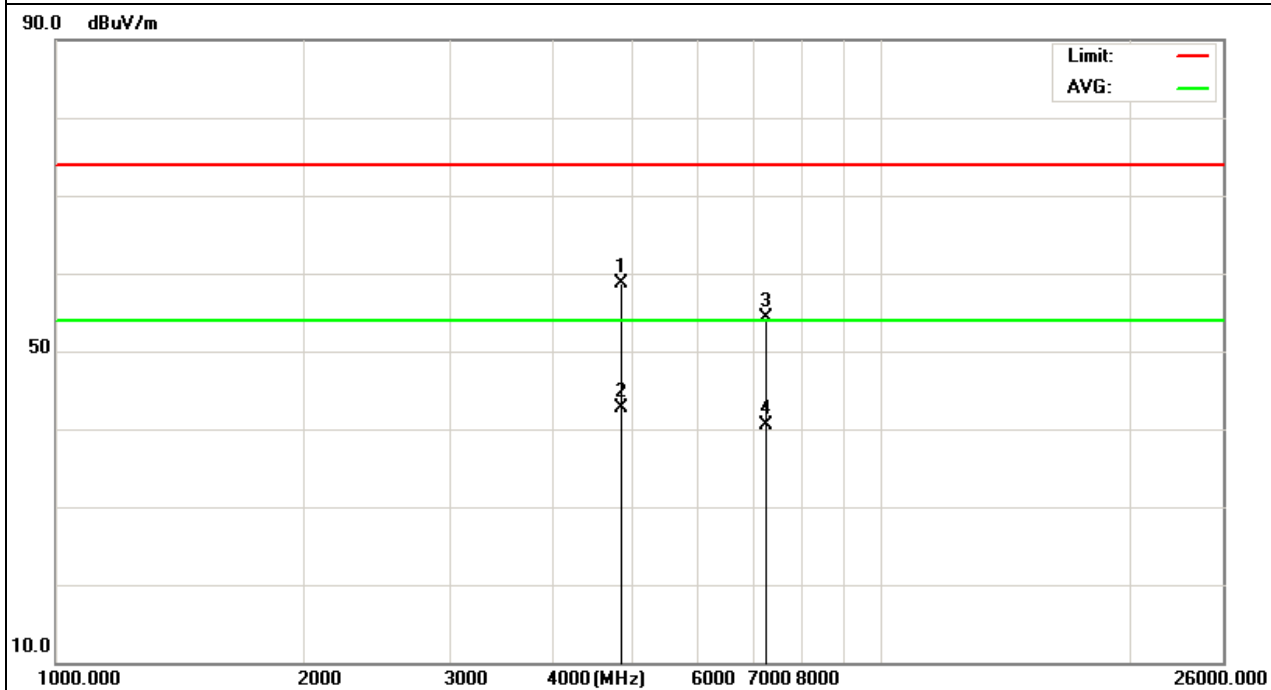




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH6(802.11n Mode)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.726	48.3	10.4	58.7	74	-15.3	peak
4874.726	31.22	10.4	41.62	54	-12.38	AVG
7311.357	41.96	12.75	54.71	74	-19.29	peak
7311.357	27.85	12.75	40.6	54	-13.4	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

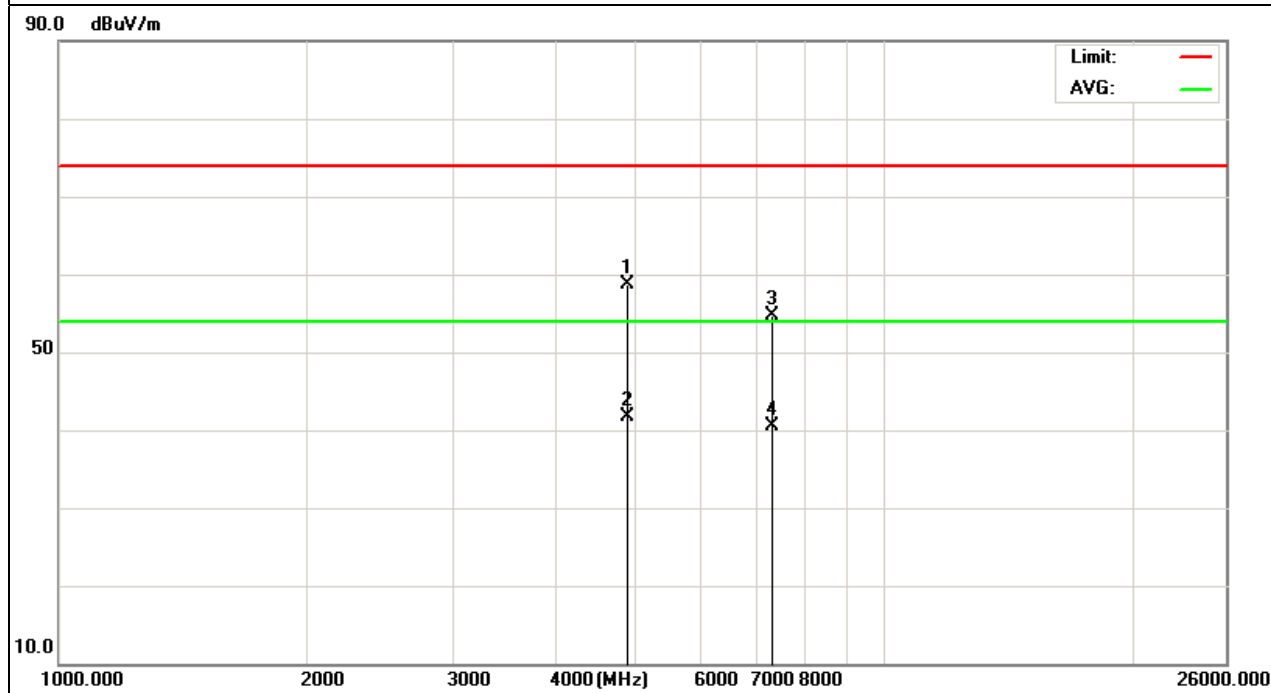




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH6(802.11n Mode)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.168	48.14	10.4	58.54	74	-15.46	peak
4874.168	31.27	10.4	41.67	54	-12.33	AVG
7311.353	41.33	12.75	54.08	74	-19.92	peak
7311.353	28.04	12.75	40.79	54	-13.21	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

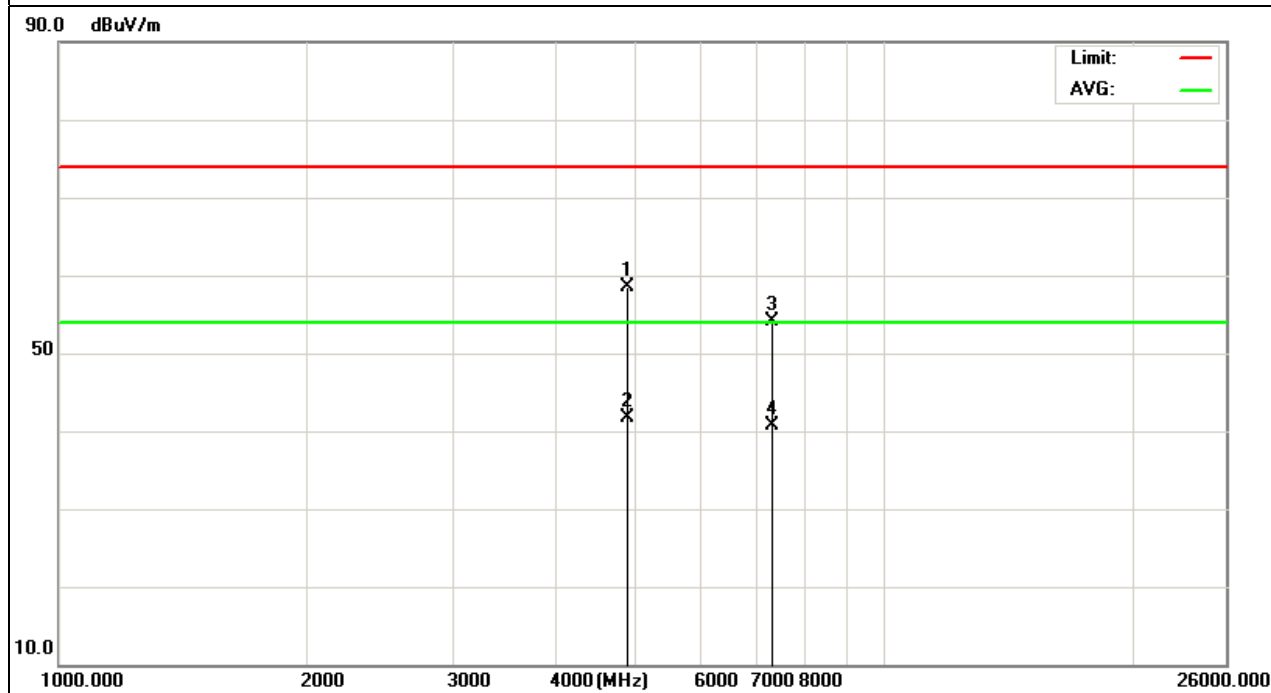




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH11(802.11n Mode)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924.171	49.5	10.39	59.89	74	-14.11	peak
4924.171	31.09	10.39	41.48	54	-12.52	AVG
7386.248	27.95	12.68	40.63	54	-13.37	AVG
7386.266	41.88	12.68	54.56	74	-19.44	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

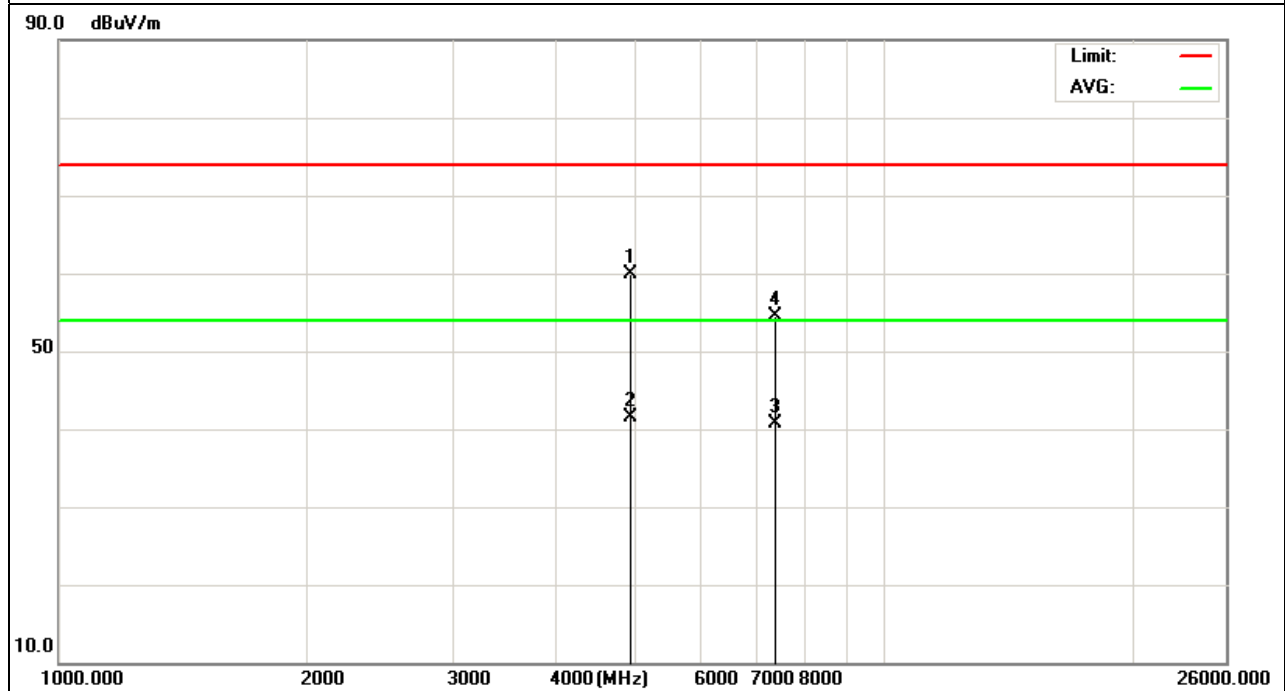




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH11(802.11n Mode)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924.459	49.46	10.39	59.85	74	-14.15	peak
4924.459	32.13	10.39	42.52	54	-11.48	AVG
7386.371	44.03	12.69	56.72	74	-17.28	peak
7386.371	27.95	12.69	40.64	54	-13.36	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

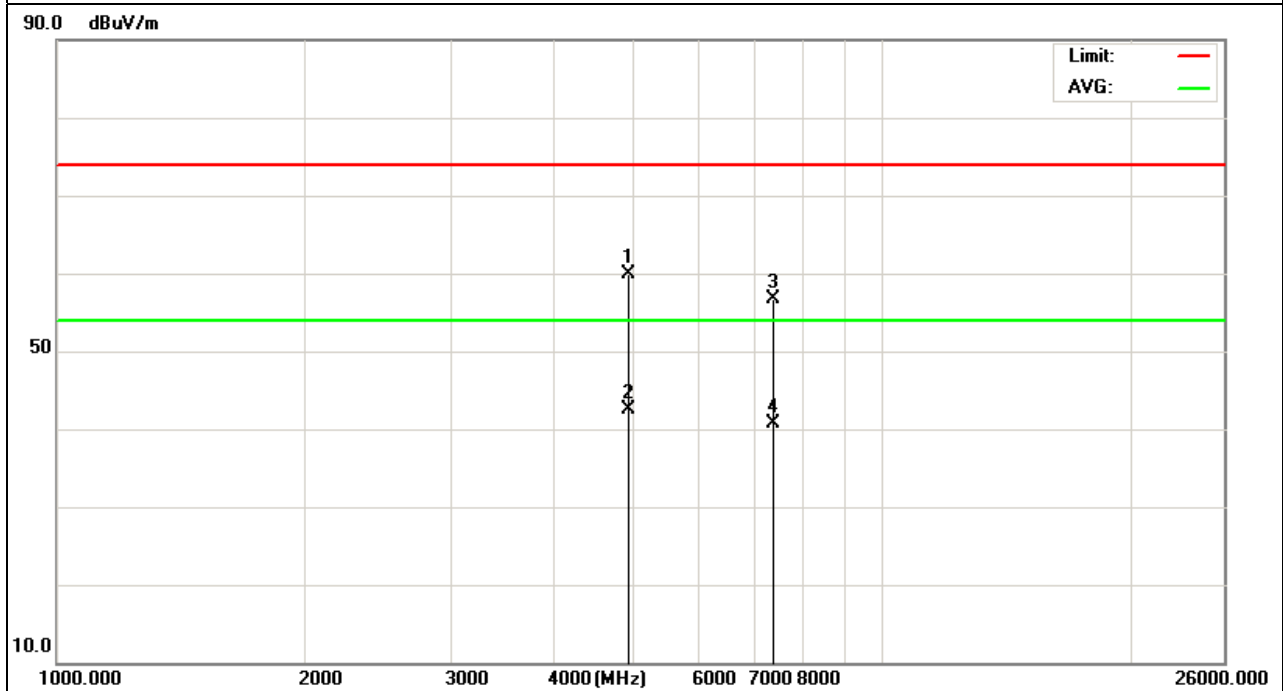


**Band Edge Emission:**

EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1(802.11b Mode)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2396.2	81.5	-13.02	68.48	74	-5.52	peak
2396.2	58.35	-13.02	45.33	54	-8.67	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

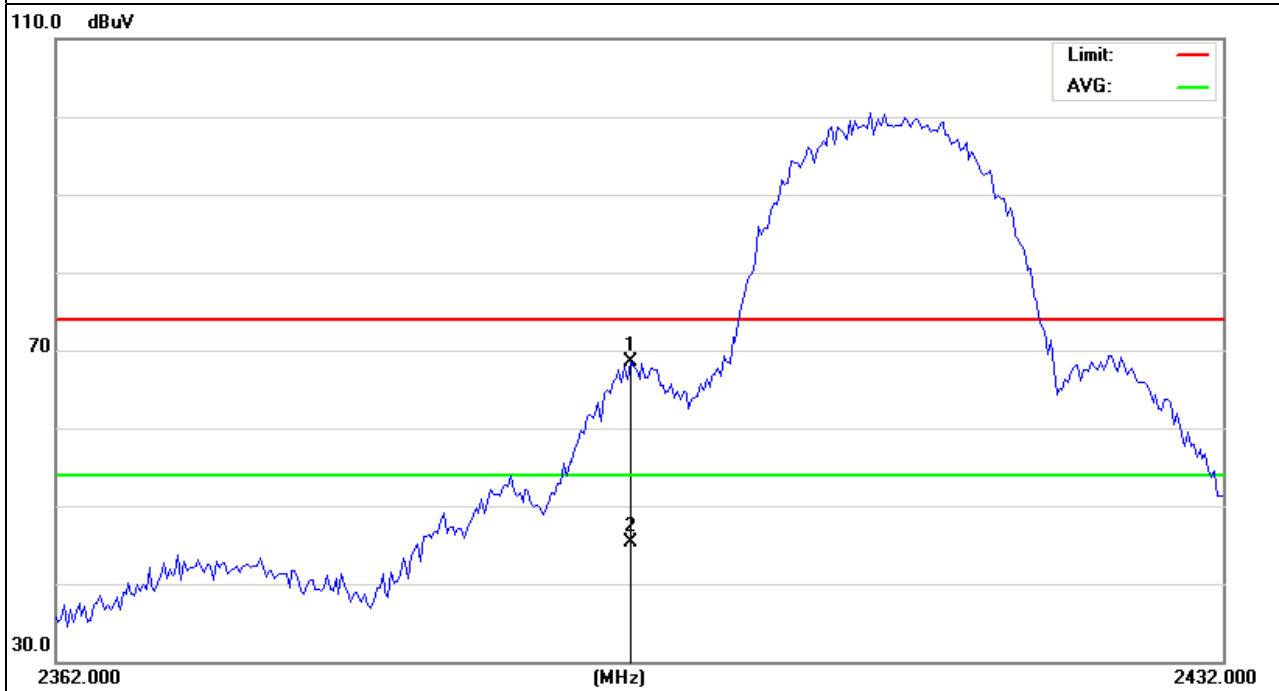


EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1(802.11b Mode)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2400	81.39	-12.99	68.4	74	-5.6	peak
2400	59.02	-12.99	46.03	54	-7.97	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

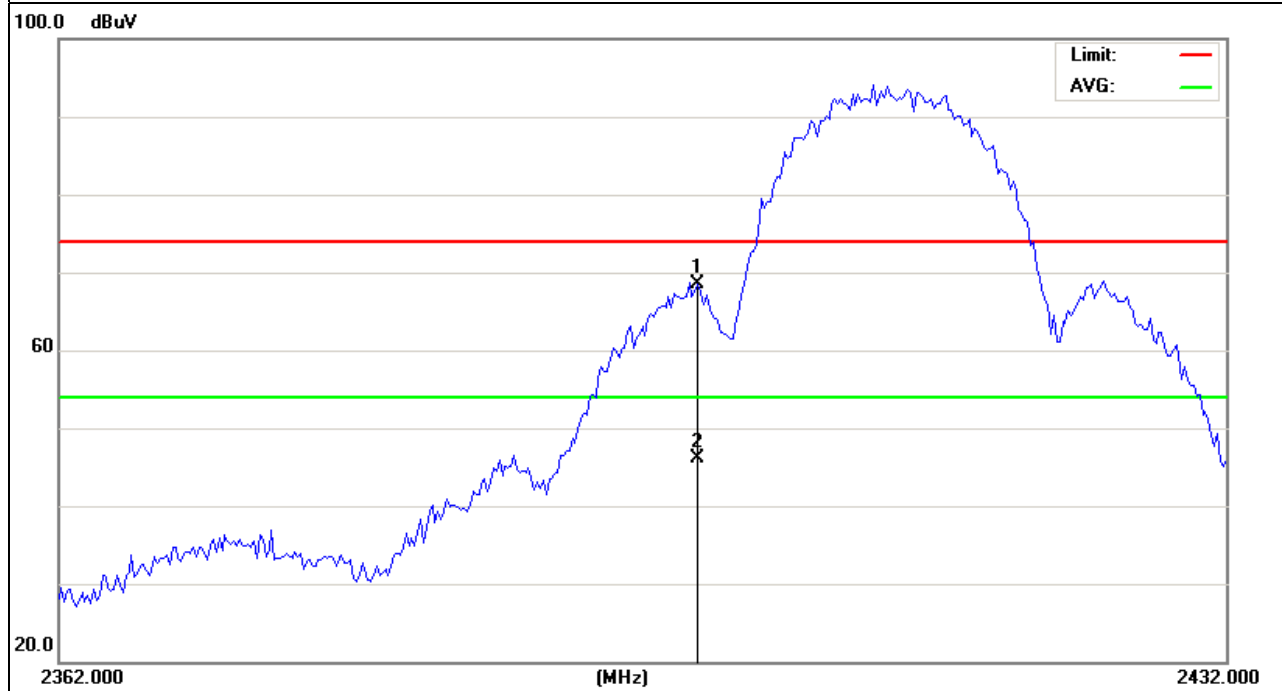




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH11(802.11b Mode)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	59.43	-12.78	46.65	74	-27.35	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

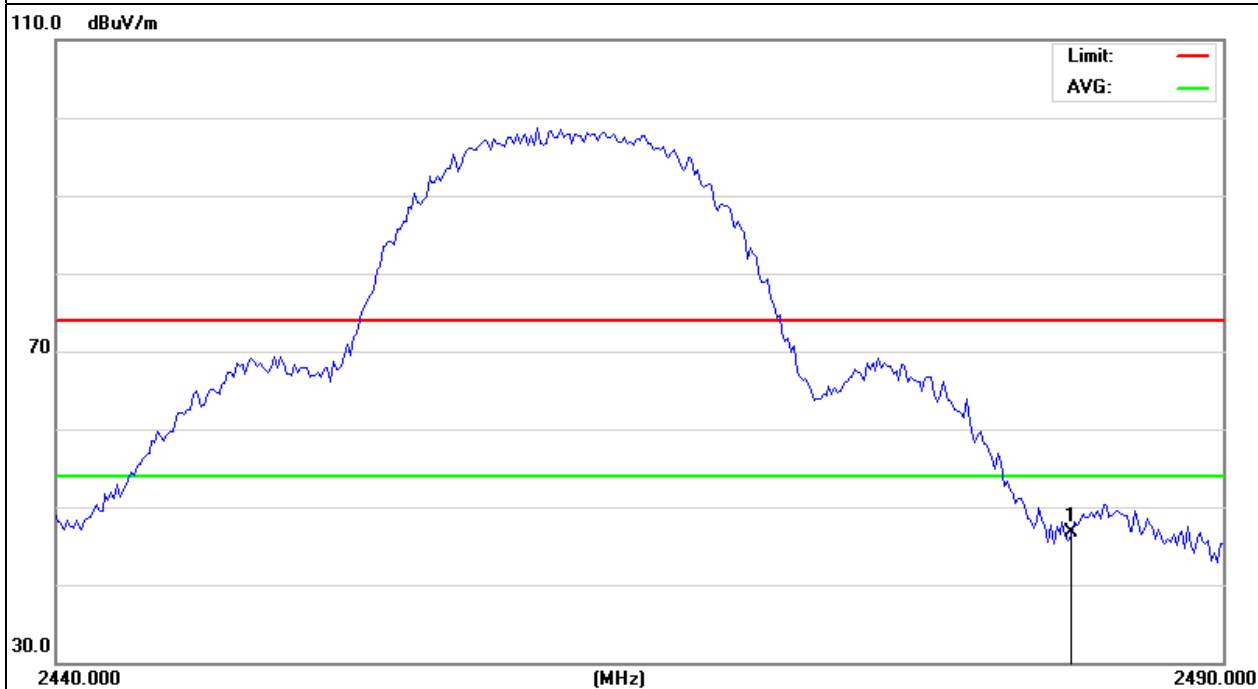




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH11(802.11b Mode)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	61.98	-12.78	49.2	74	-24.8	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

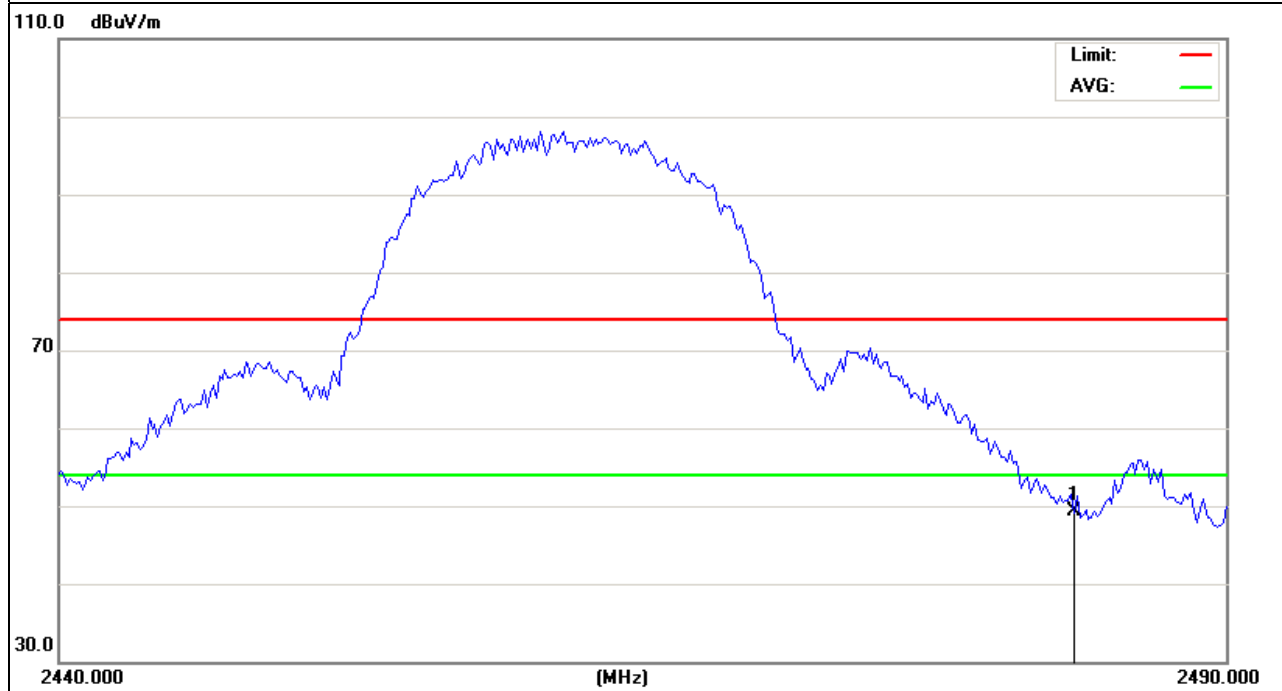




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1(802.11g Mode)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2400	80.69	-12.99	67.7	74	-6.3	peak
2400	55.31	-12.99	42.32	54	-11.68	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

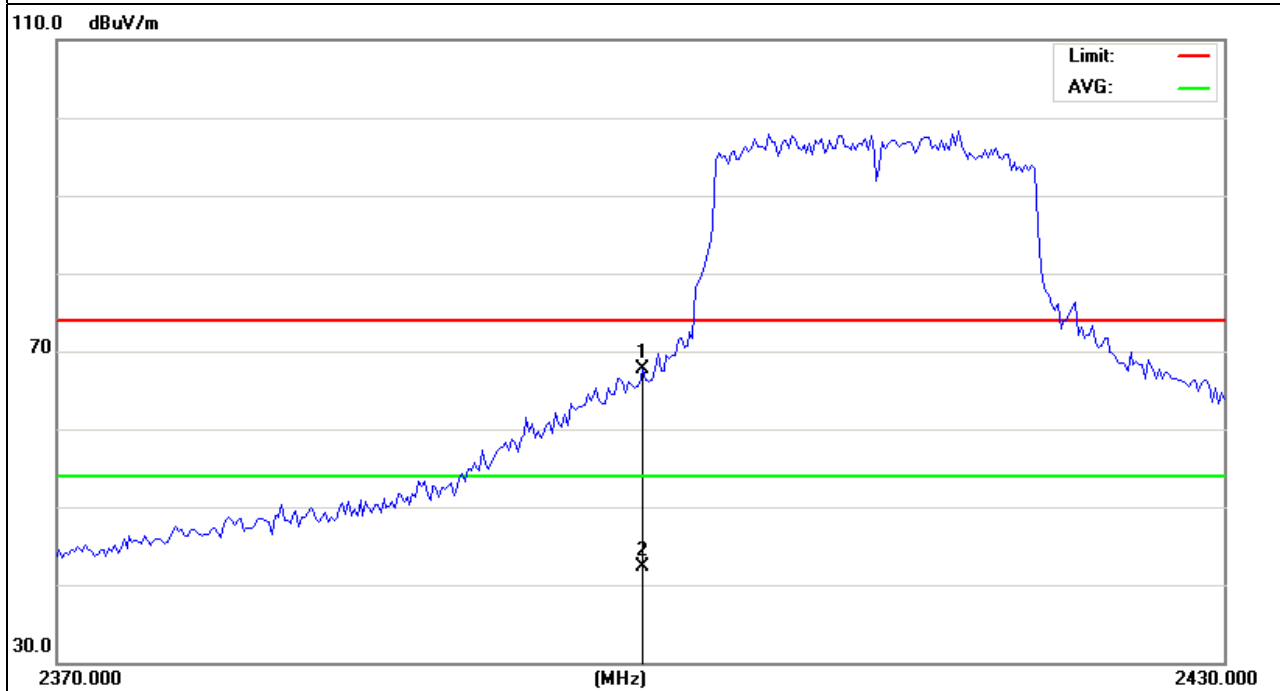




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1(802.11gMode)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2400	82.29	-12.99	69.3	74	-4.7	peak
2400	58.19	-12.99	45.2	54	-8.8	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

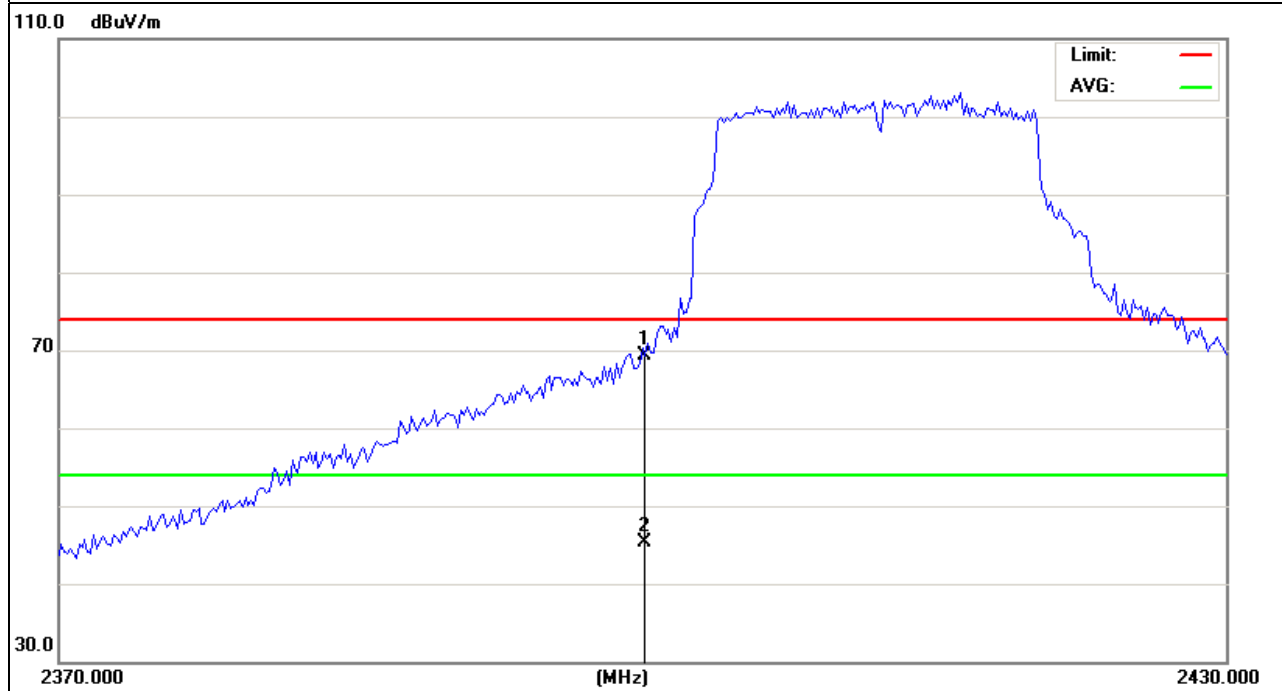




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH11(802.11g Mode)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	63.48	-12.78	50.7	74	-23.3	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

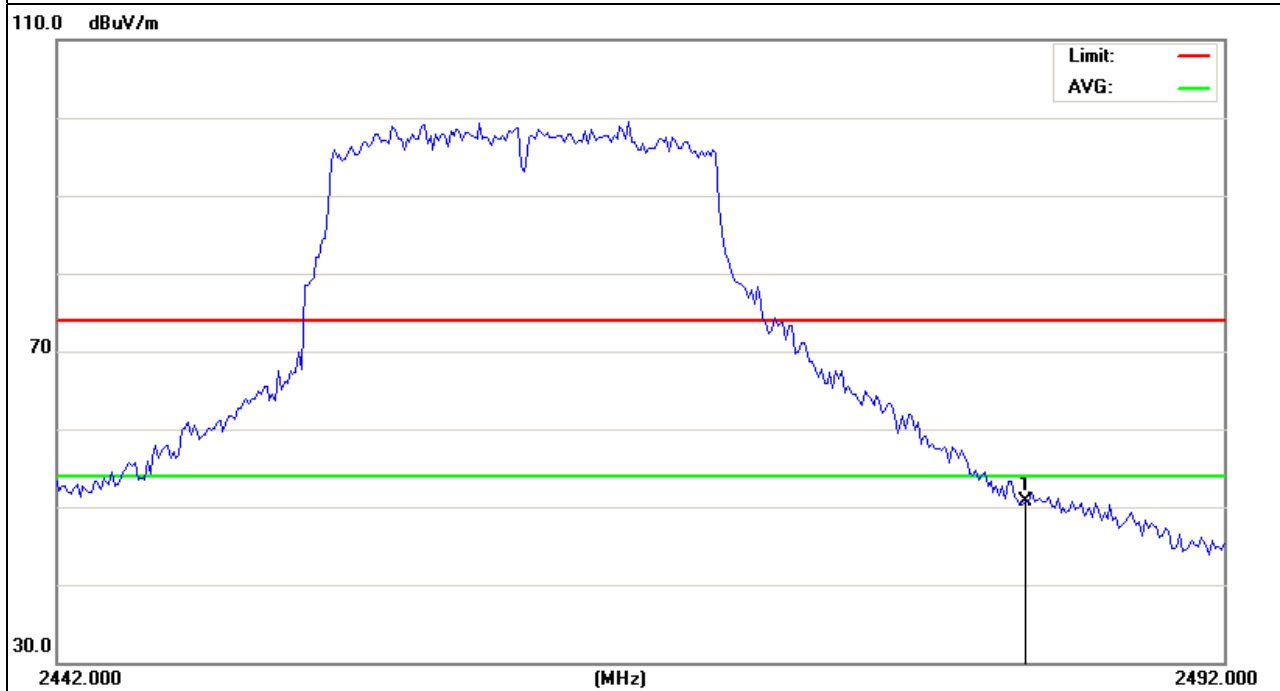




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH11(802.11g Mode)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	75.28	-12.78	62.5	74	-11.5	peak
2483.5	55.71	-12.78	42.93	54	-11.07	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

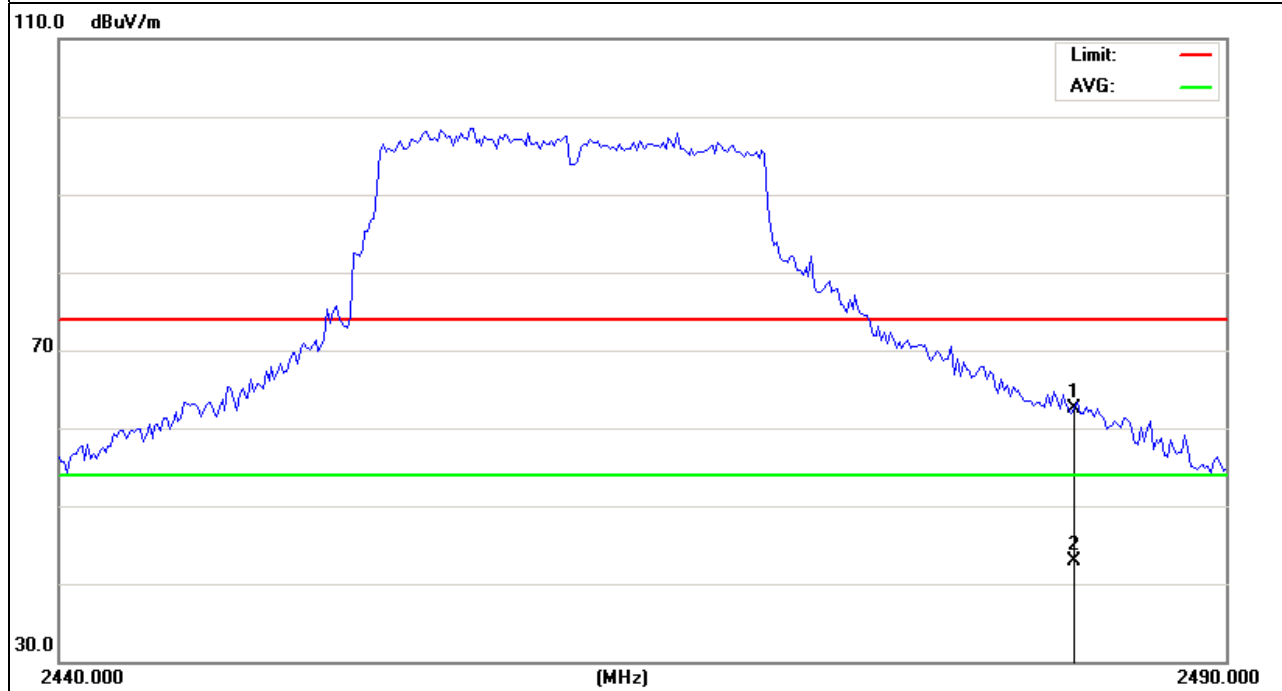




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1(802.11N Mode)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2400	80.62	-12.99	67.63	74	-6.37	peak
2400	57.71	-12.99	44.72	54	-9.28	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

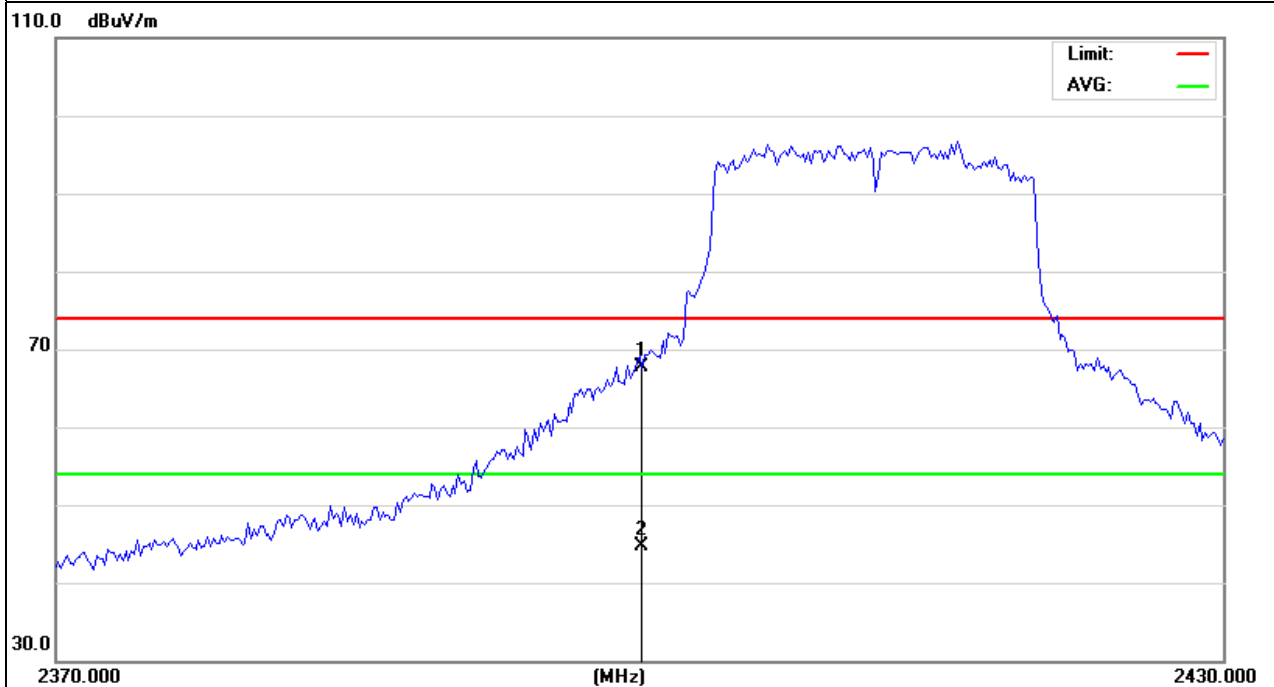




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1(802.11N Mode)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2400	82.17	-12.99	69.18	74	-4.82	peak
2400	59.54	-12.99	46.55	54	-7.45	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

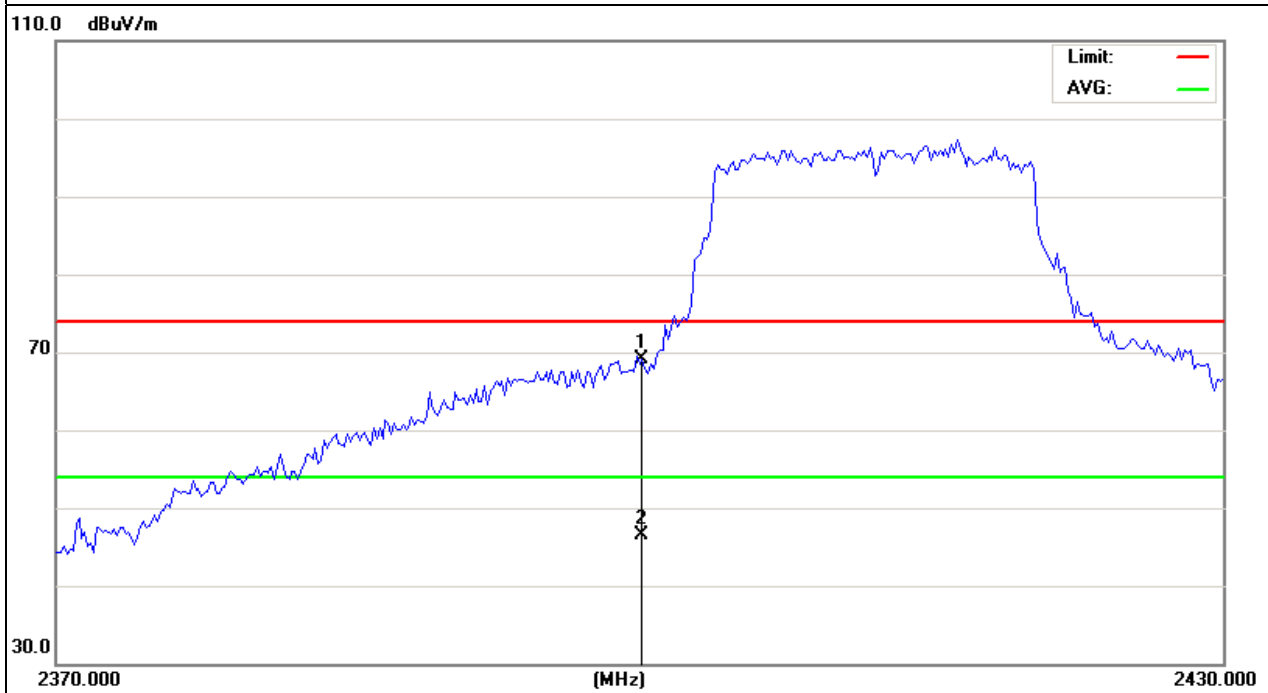




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH11(802.11N Mode)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	74.3	-12.78	61.52	74	-12.48	peak
2483.5	53.73	-12.78	40.95	54	-13.05	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

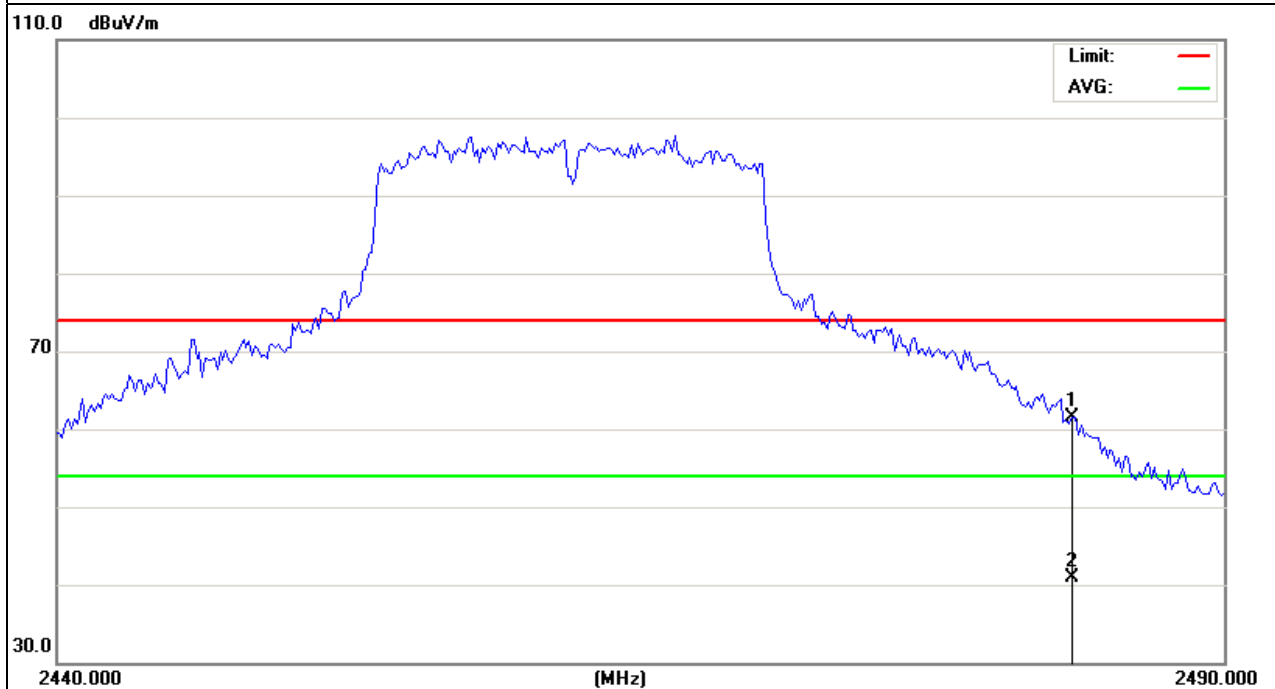




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH11(802.11N Mode)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	74.11	-12.78	61.33	74	-12.67	peak
2483.5	53.93	-12.78	41.15	54	-12.85	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

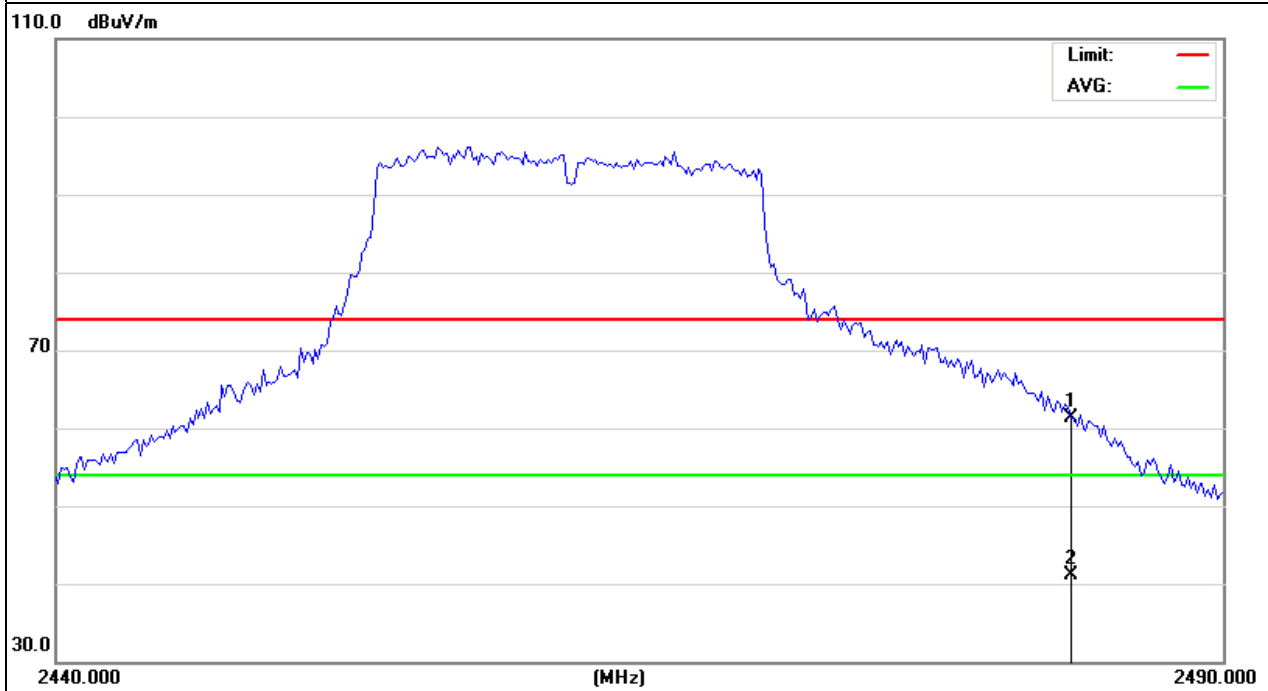

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


4.1.1 TEST PROCEDURE

1. The testing follows Measurement Procedure PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v01.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Record the measurement data derived from spectrum analyzer.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 KHz. Video bandwidth (VBW) $\geq$ 300 KHz In order to make an accurate measurement, set the span to 5-30% greater than Emission Bandwidth (EBW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
6. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

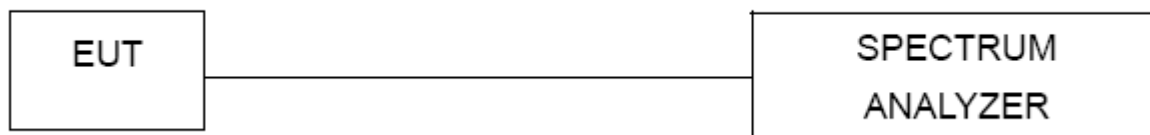

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.


4.1.5 TEST RESULTS

EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	PSD/ 3KHz (dBm)	Limit (dBm)	Result
2412 MHz	-0.365	-14.84	8	PASS
2437 MHz	-0.855	-14.35	8	PASS
2462 MHz	-0.485	-14.72	8	PASS


Note:

BWCF = $10\log(3\text{ kHz}/100\text{ kHz} = -15.2\text{ dB})$.

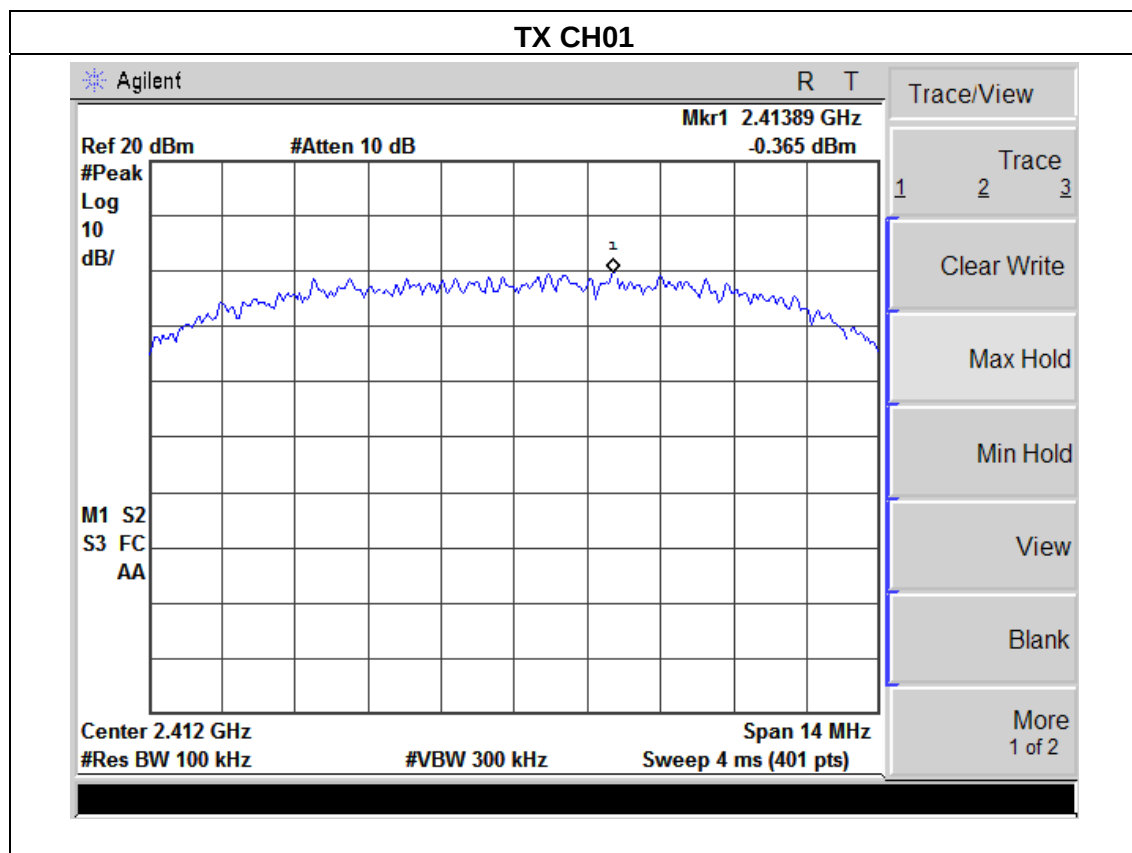




TX CH06

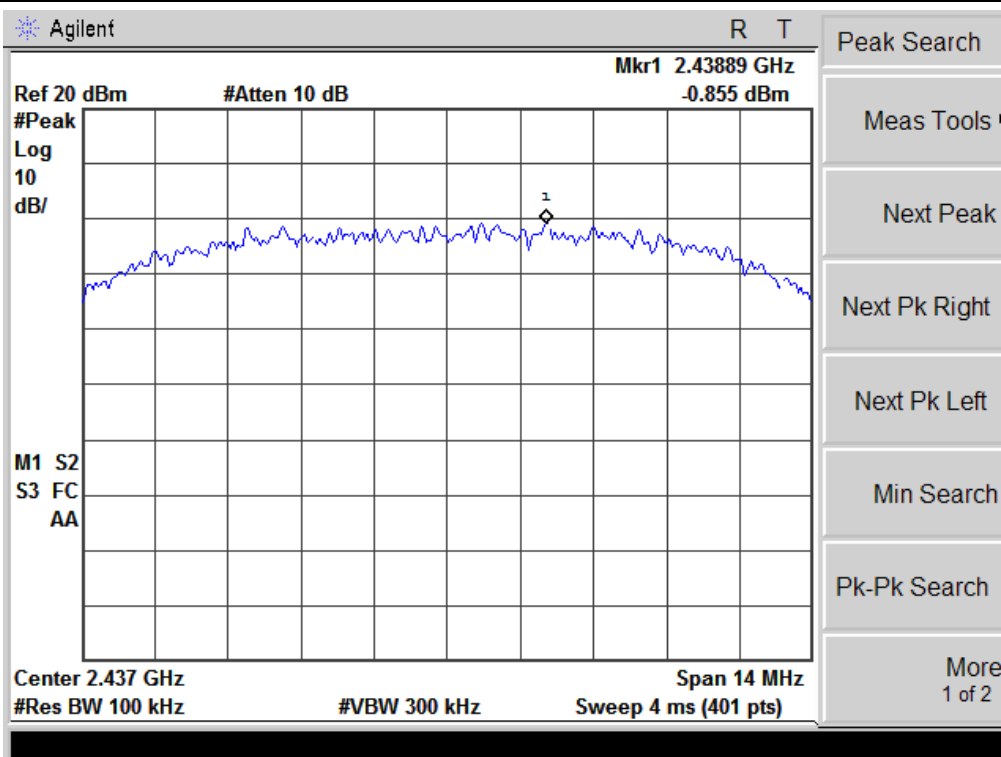

TX CH11

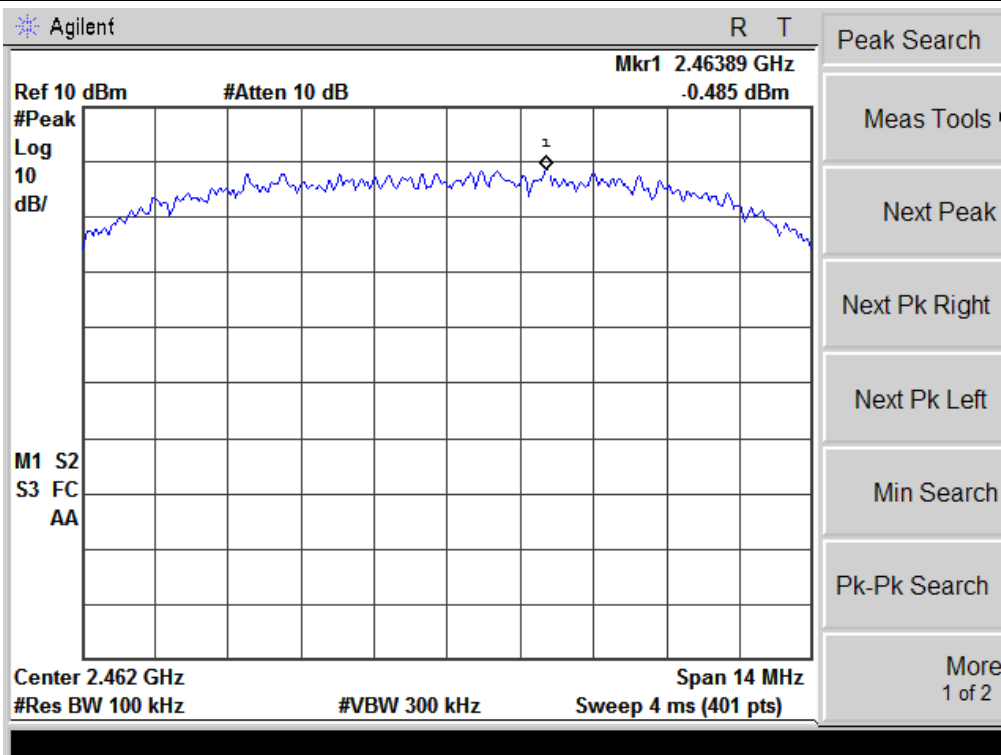




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	PSD/ 3KHz (dBm)	Limit (dBm)	Result
2412 MHz	-1.05	-14.15	8	PASS
2437 MHz	-1.03	-14.17	8	PASS
2462 MHz	-1.32	-13.88	8	PASS


Note:

BWCF = $10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$.

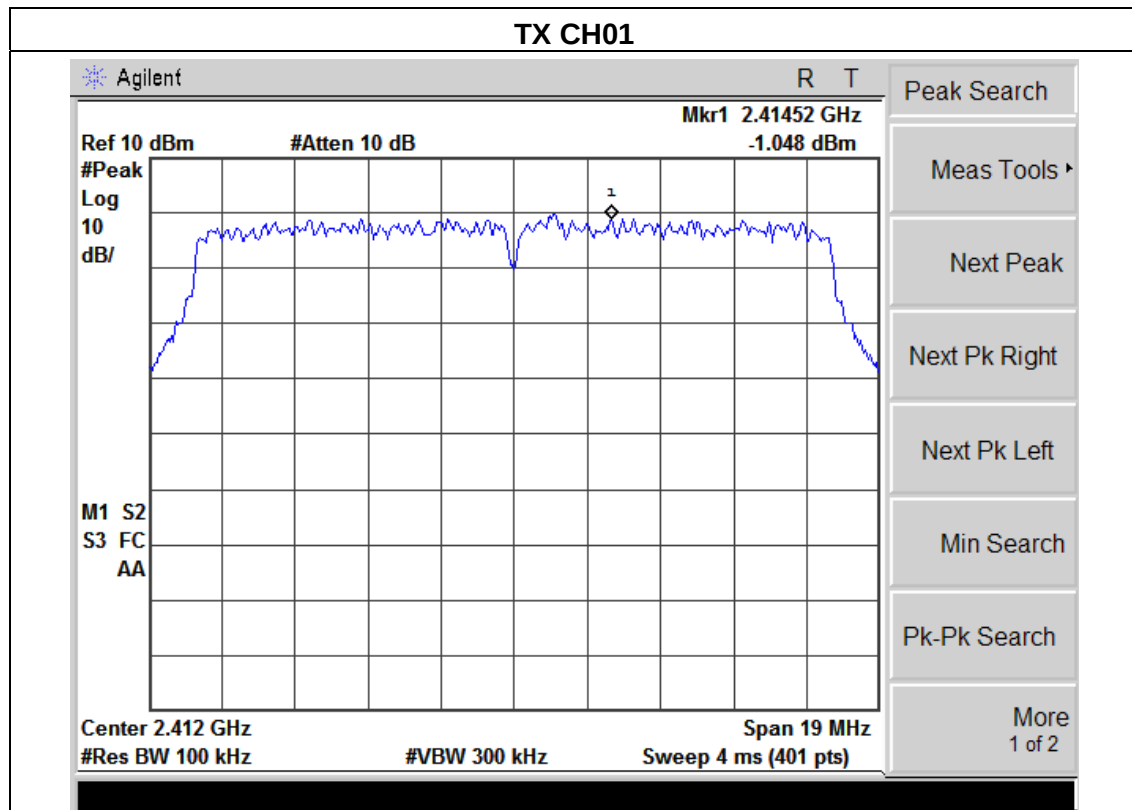




TX CH06

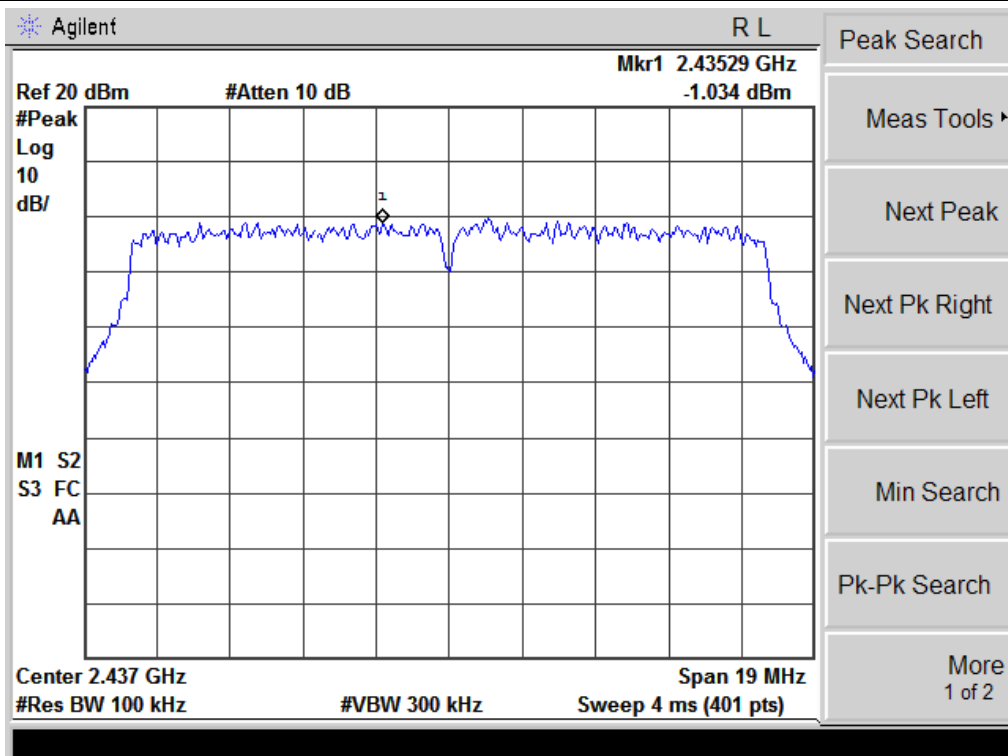

TX CH11

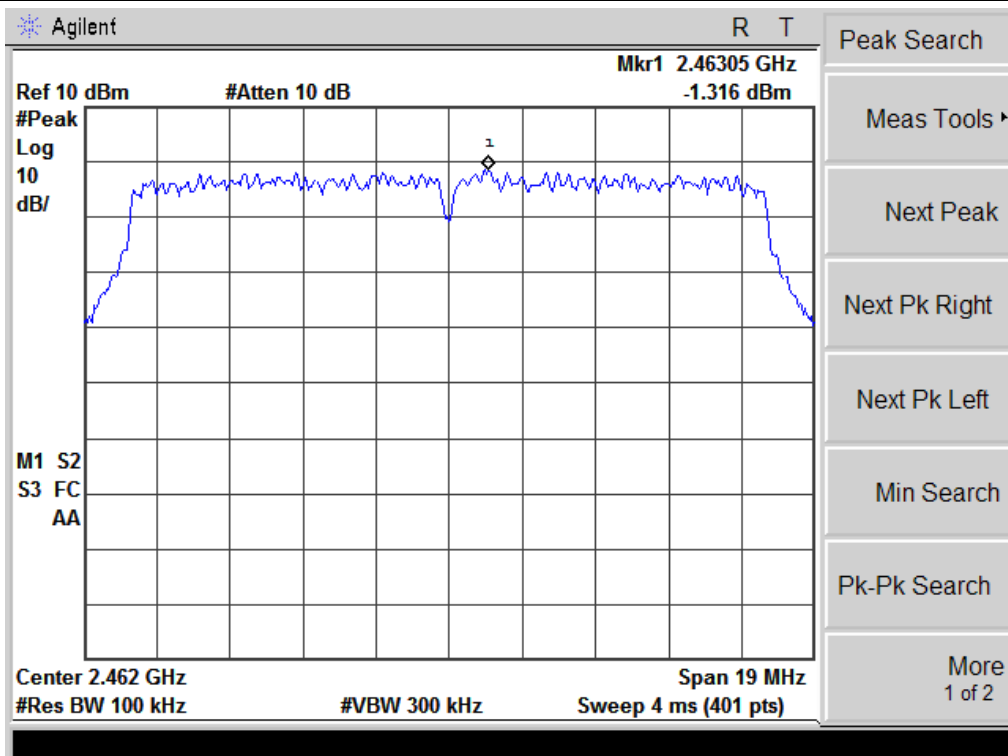


EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	PSD/ 3KHz (dBm)	Limit (dBm)	Result
2412 MHz	-6.94	-8.26	8	PASS
2437 MHz	-6.41	-8.79	8	PASS
2462 MHz	-6.23	-8.97	8	PASS


Note:

BWCF = $10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$.

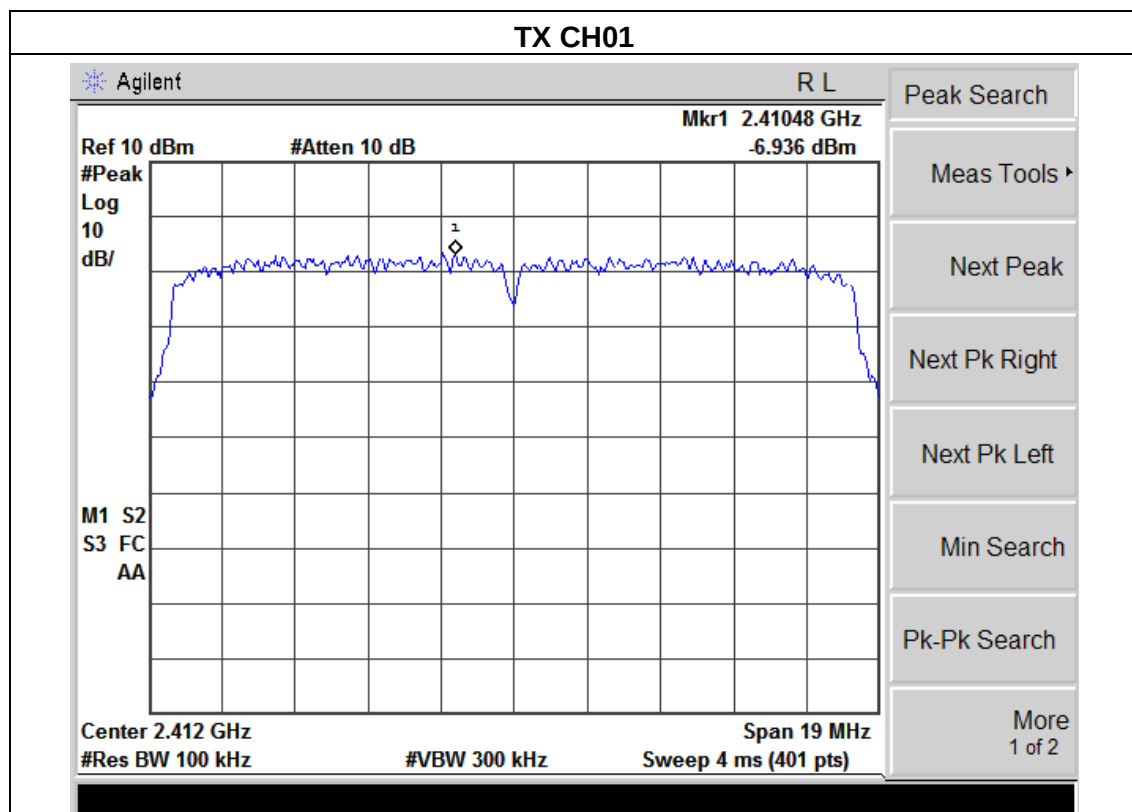




TX CH06

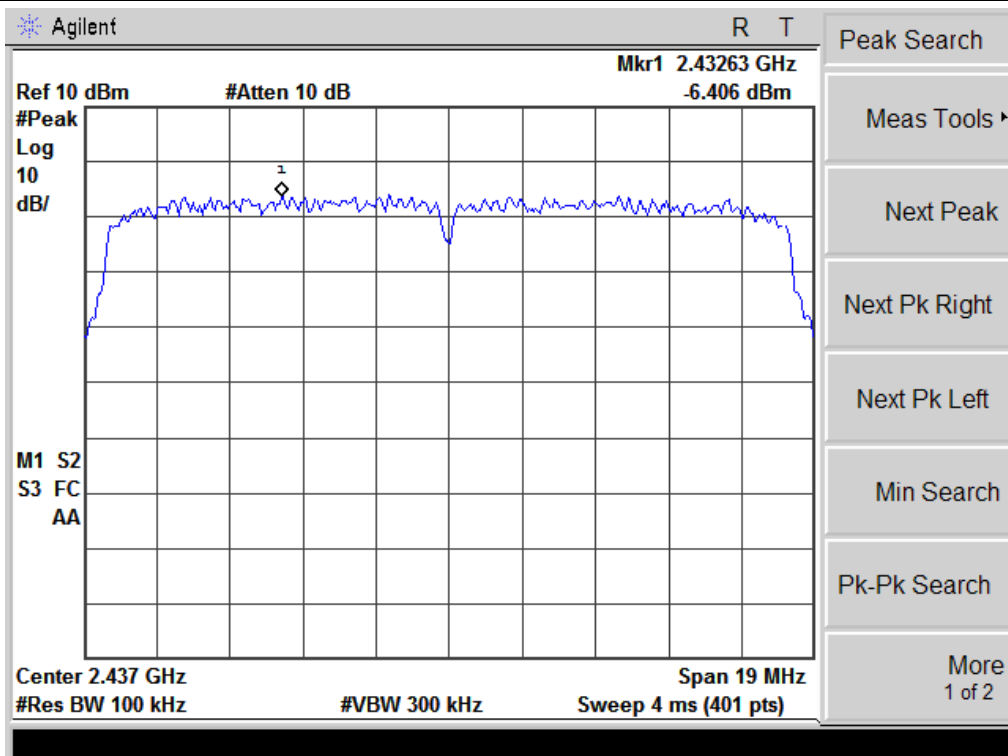

TX CH11

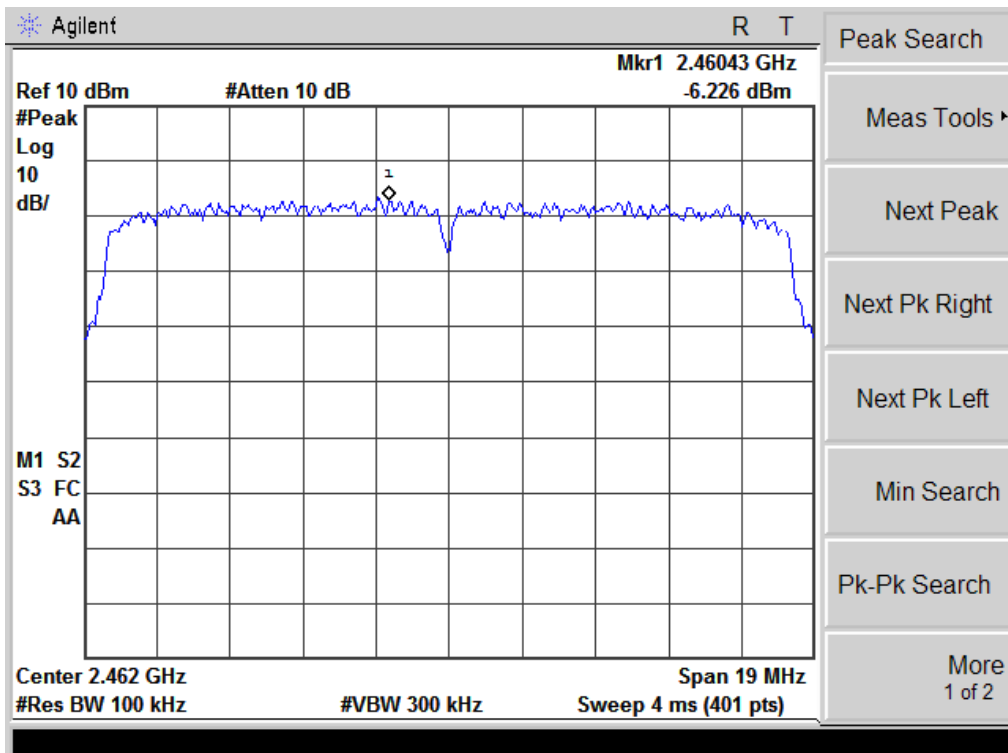

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- a.
1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v01.
 2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1-5% of the emission bandwidth (EBW). Set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
 4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP




5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	25 ℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode /CH01, CH06, CH11		

Frequency	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Channel Separation (MHz)	Result
2412 MHz	11.46	14.04	>=500KHz	PASS
2437 MHz	11.55	14.09	>=500KHz	PASS
2462 MHz	11.59	14.04	>=500KHz	PASS

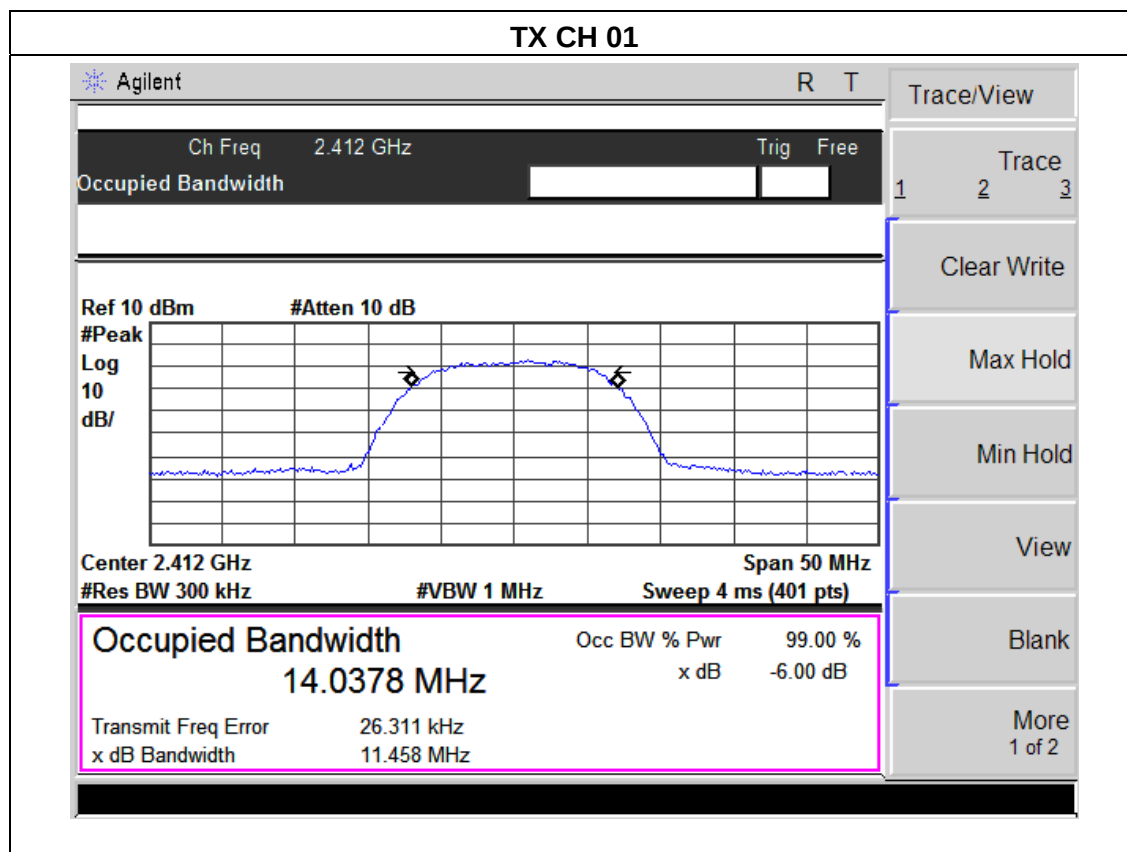




TX CH 06

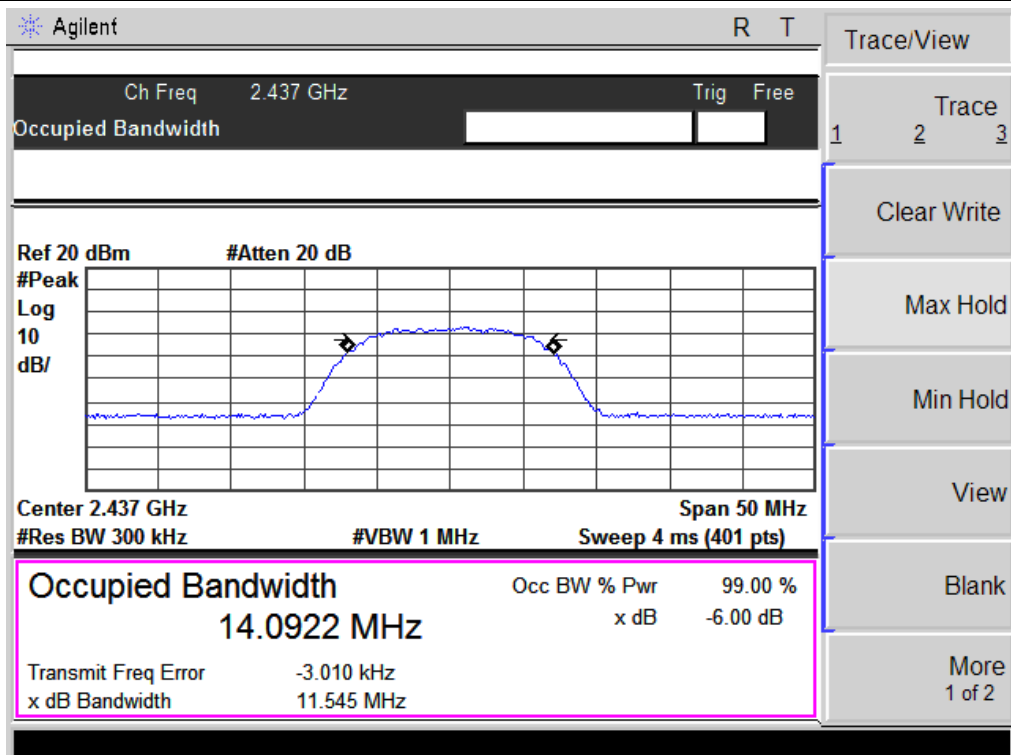


TX CH 11

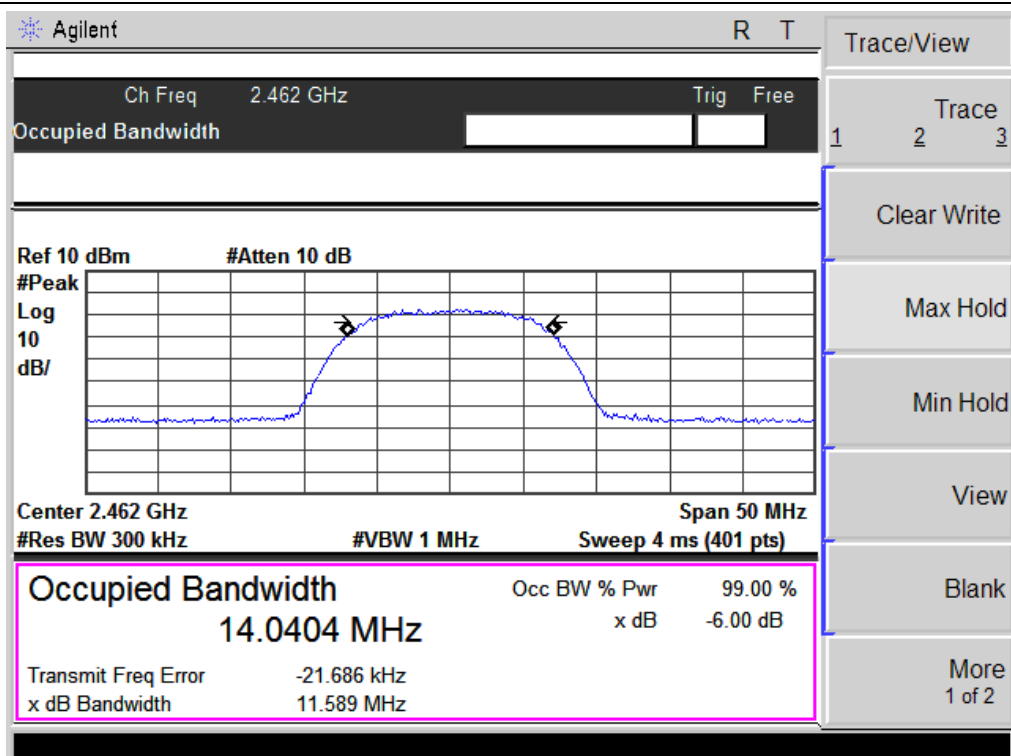




EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode /CH01, CH06, CH11		

Frequency	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Channel Separation (MHz)	Result
2412 MHz	16.45	16.57	>=500KHz	PASS
2437 MHz	16.56	16.55	>=500KHz	PASS
2462 MHz	16.52	16.56	>=500KHz	PASS

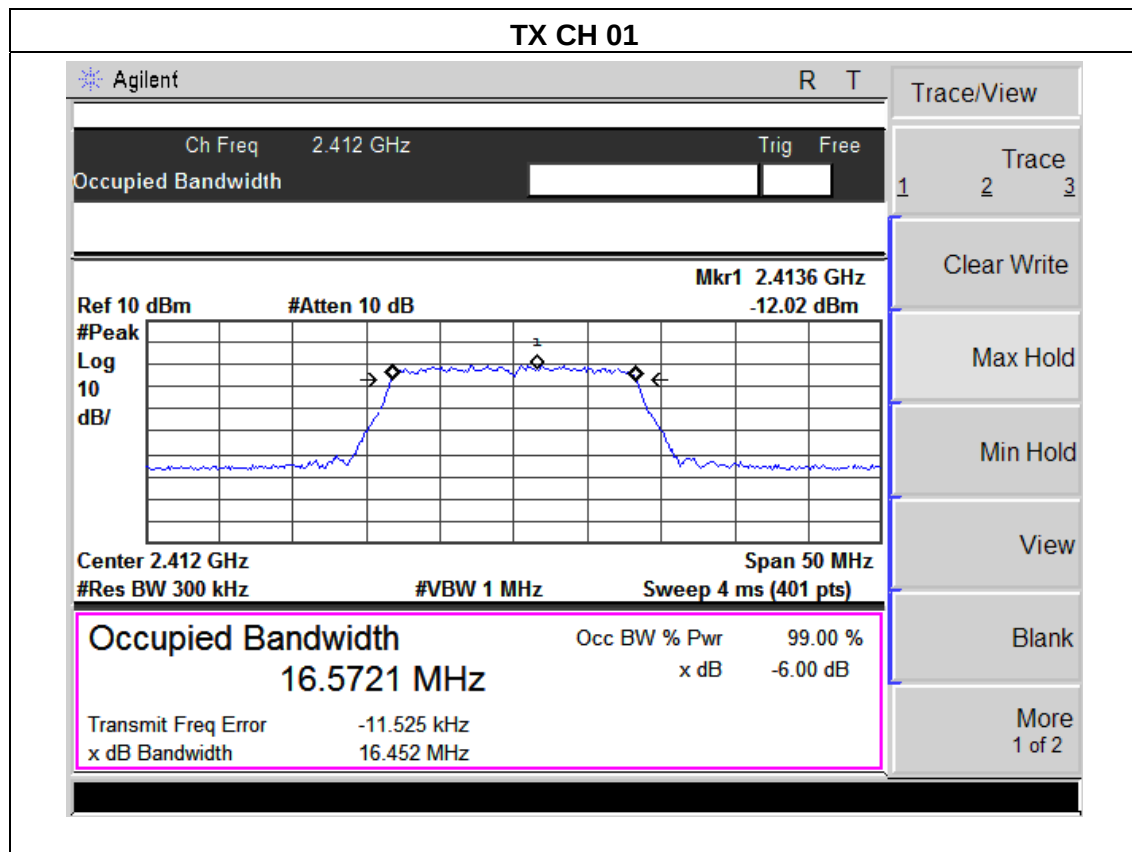





TX CH 06

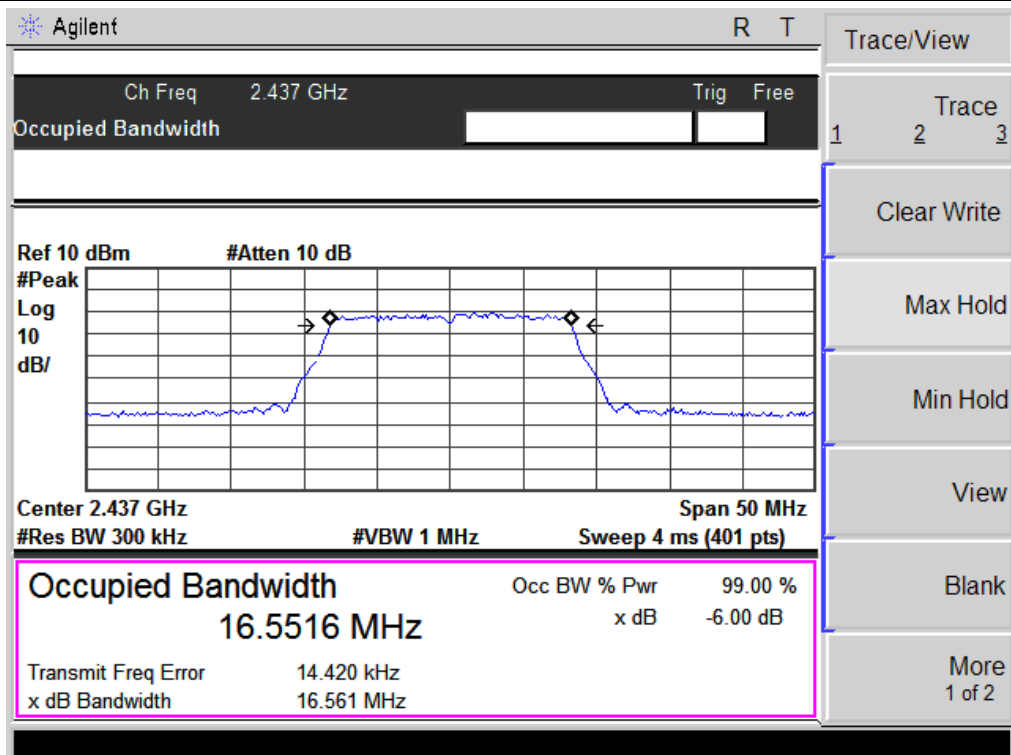

TX CH 11

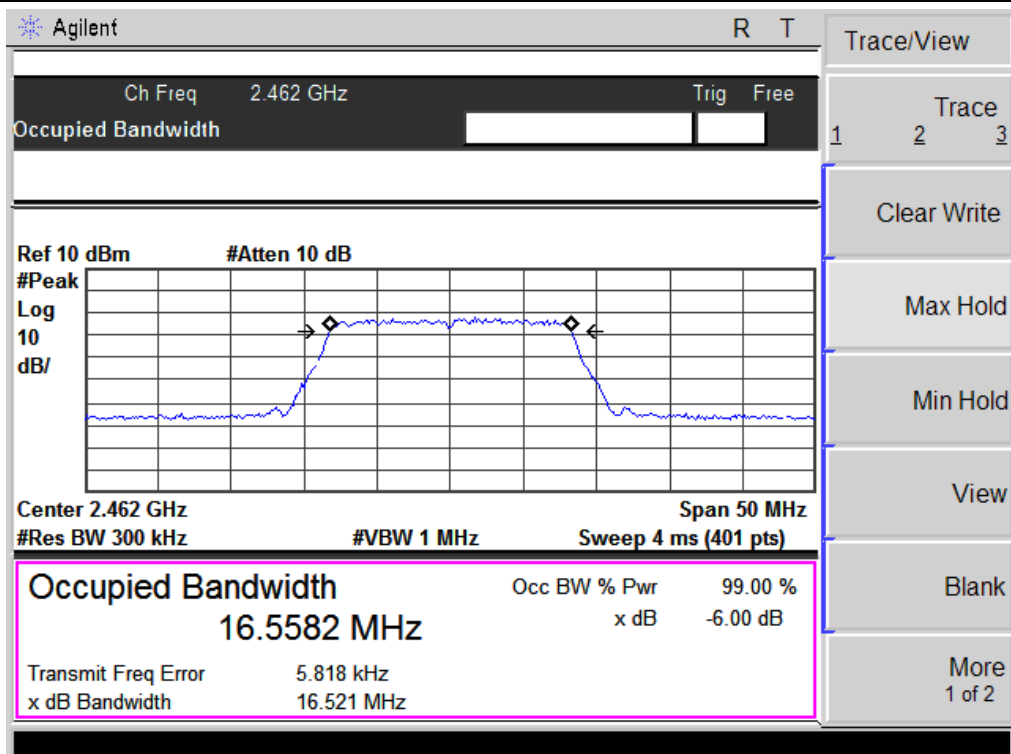


Frequency	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Channel Separation (MHz)	Result
2412 MHz	17.27	17.48	>=500KHz	PASS
2437 MHz	17.41	17.46	>=500KHz	PASS
2462 MHz	17.14	17.47	>=500KHz	PASS

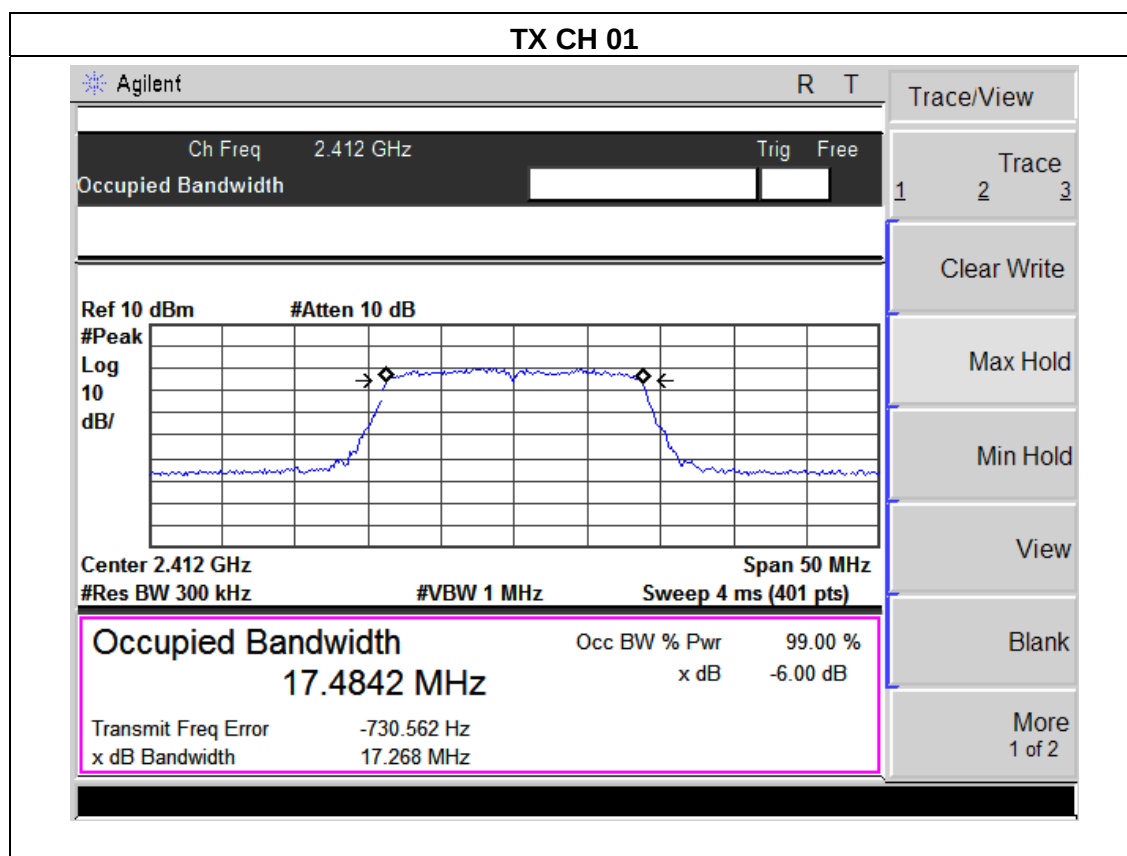




TX CH 06

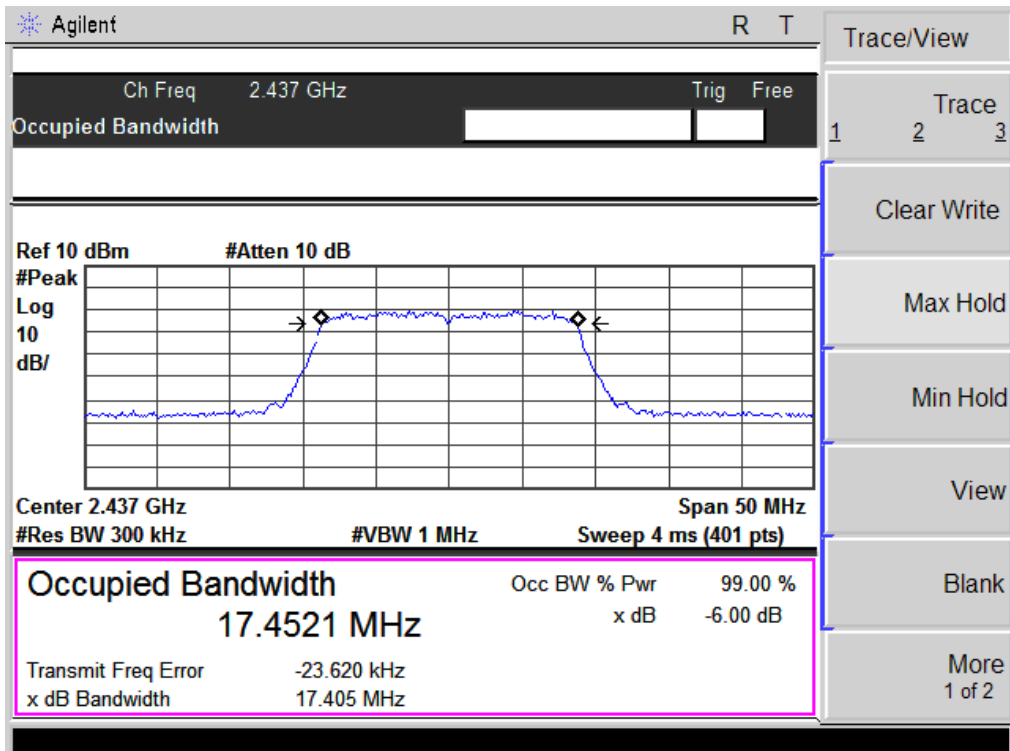

TX CH 11

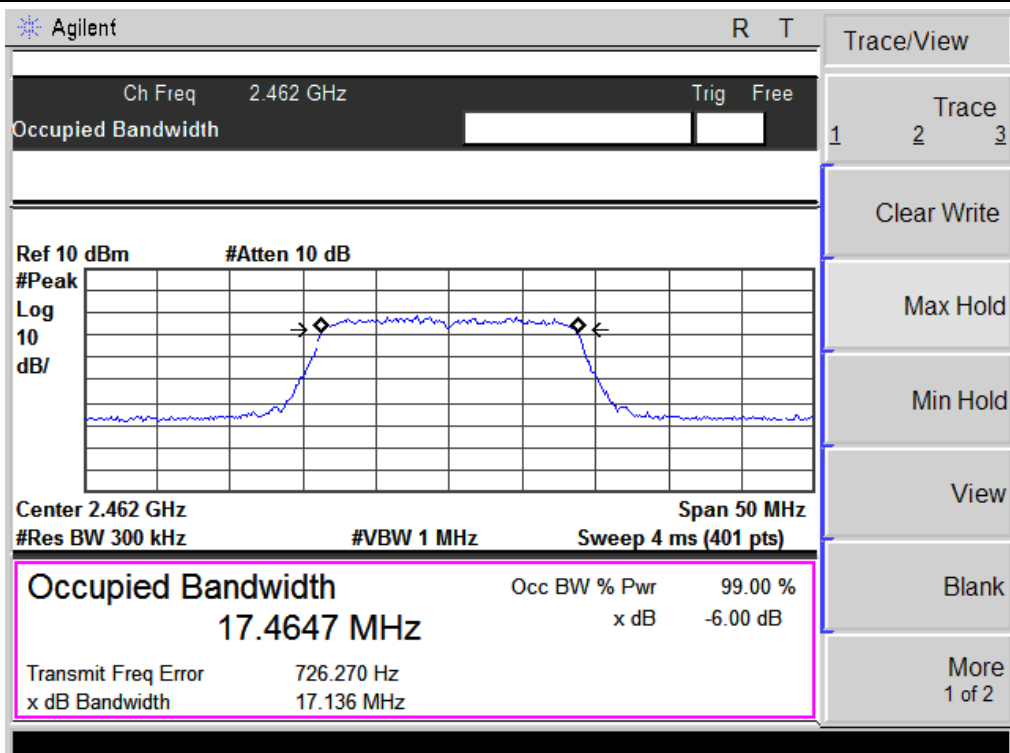

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT :	CareConnect	Model Name :	CareConnect-01
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b/g/n(20M) Mode /CH01, CH06, CH11		

TX 802.11b Mode			
Test Channe	Frequency (MHz)	Peak output power. Antenna port (dBm)	LIMIT dBm
CH01	2412	11.89	30
CH06	2437	11.35	30
CH11	2462	11.44	30
TX 802.11g Mode			
CH01	2412	10.78	30
CH06	2437	10.53	30
CH11	2462	10.62	30
TX 802.11n Mode			
CH01	2412	9.92	30
CH06	2437	9.78	30
CH11	2462	9.65	30

7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA

The EUT antenna is Integrated antenna(Chip antenna). It comply with the standard requirement.

8. EUT TEST PHOTO

Radiated Measurement Photos

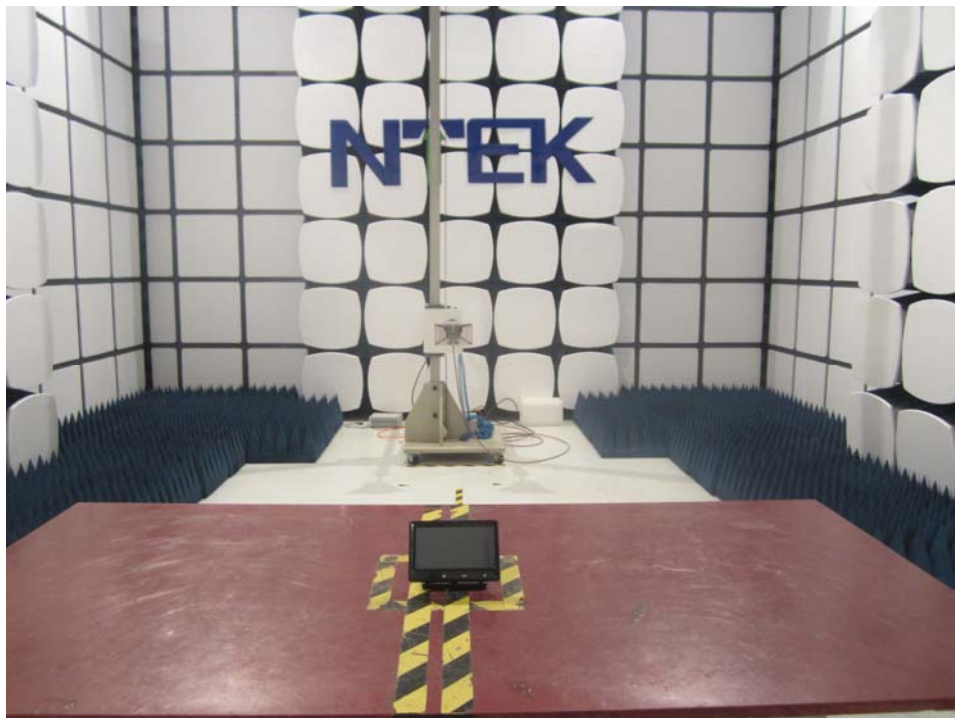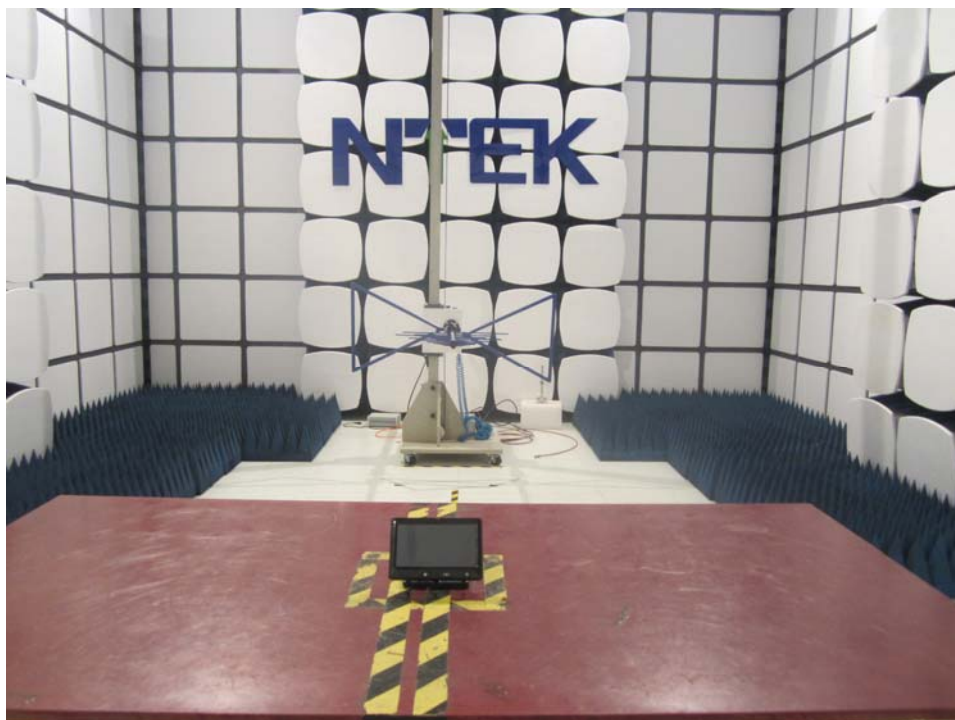

Conducted Measurement Photos

