

APPLICATION CERTIFICATION
On Behalf of
NOEND INDUSTRIES COMPANY LTD

KEY FINDER
Model No.: LD2519

FCC ID: R62-LD2519

Prepared for : NOEND INDUSTRIES COMPANY LTD
Address : RM1311, New Tech Plaza, 34 Tai Yau Street, San Po
Kong, Kln, Hong Kong
Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20122414
Date of Test : Oct 22-Nov 13, 2012
Date of Report : Nov 13, 2012

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility	5
1.3. Measurement Uncertainty.....	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
3. SUMMARY OF TEST RESULTS.....	7
4. THE FIELD STRENGTH OF RADIATION EMISSION	8
4.1. Block Diagram of Test Setup.....	8
4.2. The Field Strength of Radiation Emission Measurement Limits.....	9
4.3. Configuration of EUT on Measurement	9
4.4. Operating Condition of EUT	9
4.5. Test Procedure	10
4.6. The Field Strength of Radiation Emission Measurement Results	11
5. 20DB OCCUPIED BANDWIDTH	13
5.1. Block Diagram of Test Setup.....	13
5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c)	13
5.3. EUT Configuration on Measurement	14
5.4. Operating Condition of EUT	14
5.5. Test Procedure	14
5.6. Measurement Result	15
6. RELEASE TIME MEASUREMENT.....	16
6.1. Block Diagram of Test Setup.....	16
6.2. Release Time Measurement According To FCC Part 15 Section 15.231(a)	16
6.3. EUT Configuration on Measurement	17
6.4. Operating Condition of EUT	17
6.5. Test Procedure	17
6.6. Measurement Result	18
7. ANTENNA REQUIREMENT.....	19
7.1. The Requirement	19
7.2. Antenna Construction	19

APPENDIX I (TEST CURVES) (10 pages)

Test Report Certification

Applicant : NOEND INDUSTRIES COMPANY LTD
 Manufacturer : SHENZHEN ECARE ELECTRONICS CO., LTD
 EUT Description : KEY FINDER
 (A) MODEL NO.: LD2519
 (B) Trade Name.: n.a
 (C) POWER SUPPLY: DC 3V ("AAA battery" 2×)

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.231
ANSI 63.10: 2009

The device described above is tested by ACCURATE TECHNOLOGY CO., LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO., LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO., LTD.

Date of Test : _____ Oct 22-Nov 13, 2012

Prepared by :



 (Engineer)

Approved & Authorized Signer :



 (Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : KEY FINDER
Model Number : LD2519
Trade Name : n.a

Power Supply : DC 3V ("AAA battery" 2×)

Operation Frequency : 433.92MHz

Applicant : NOEND INDUSTRIES COMPANY LTD
Address : RM1311, New Tech Plaza, 34 Tai Yau Street, San Po Kong, Kln, Hong Kong

Manufacturer : SHENZHEN ECARE ELECTRONICS CO., LTD
Address : 6/F, Block B, huali Industrial Building, District 28, Baoan Shenzhen, China

Date of sample received : Oct 22, 2012

Date of Test : Oct 22- Nov 13, 2012

1.2.Description of Test Facility

EMC Lab	: Accredited by TUV Rheinland Shenzhen
	Listed by FCC The Registration Number is 752051
	Listed by Industry Canada The Registration Number is 5077A-2
	Accredited by China National Accreditation Committee for Laboratories The Certificate Registration Number is L3193
Name of Firm	: ACCURATE TECHNOLOGY CO., LTD
Site Location	: F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.3.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated date	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 8, 2012	Jan. 7, 2013
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 8, 2012	Jan. 7, 2013
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 8, 2012	Jan. 7, 2013
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 8, 2012	Jan. 7, 2013
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 8, 2012	Jan. 7, 2013
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 8, 2012	Jan. 7, 2013
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 8, 2012	Jan. 7, 2013
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 8, 2012	Jan. 7, 2013

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.231(b)	Radiated Emission	Compliant
Section 15.231(c)	20dB Bandwidth	Compliant
Section 15.231(a)(1)	Release Time Measurement	Compliant
Section 15.203	Antenna Requirement	Compliant

The product is a manually operated Remote Control transmitter.

Section 15.231 (a) (2), (3), (4) and (5) are not applicable.

All normal using modes of the normal function were tested but only the worst test data of the worst mode is recorded by this report.

4. THE FIELD STRENGTH OF RADIATION EMISSION

4.1. Block Diagram of Test Setup


4.1.1. Block diagram of connection between the EUT and simulators



(EUT: KEY FINDER)

4.1.2. Semi-Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

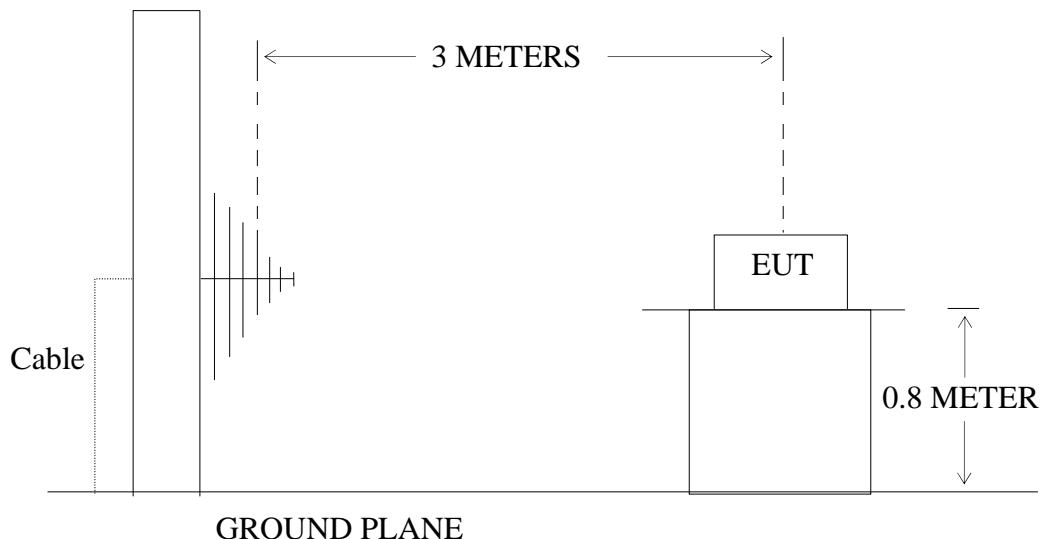

(EUT: KEY FINDER)

4.2.The Field Strength of Radiation Emission Measurement Limits

4.2.1.Radiation Emission Measurement Limits According to FCC Part 15 Section 15.231(b)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [μV/m]	Field Strength of Spurious Emission [μV/m]
40.66-40.70	2250	225
70-130	1250	125
130-174	1250-3750	125-375
174-260	3750	375
260-470	3750-12500	375-1250
Above 470	12500	1250

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

4.2.2.Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section15.209.

4.3.Configuration of EUT on Measurement

The following equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1. KEY FINDER (EUT)

Model Number : LD2519
 Serial Number : N/A
 Manufacturer : SHENZHEN ECARE ELECTRONICS CO., LTD

4.4.Operating Condition of EUT

4.4.1.Setup the EUT and simulator as shown as Section 4.1.

4.4.2.Turn on the power of all equipment.

4.4.3. Let the EUT work in TX mode measure it.

4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI 63.10 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 120 kHz in 30-1000 MHz, and 1 MHz in 1000-5000 MHz.

The frequency range from 30 MHz to 5000 MHz is checked.

**4.6.The Field Strength of Radiation Emission Measurement Results
PASS.**

The frequency range 30MHz to 4000MHz is investigated.

Date of Test:	Nov 3-Nov 10, 2012	Temperature:	25°C
EUT:	KEY FINDER	Humidity:	50%
Model No.:	LD2519	Power Supply:	DC 3V
Test Mode:	TX	Test Engineer:	Ricky

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dB μ V/m)	Factor Corr. (dB)	Result	Limit	Margin	Polarization
			QP	QP	QP	
433.9200	36.43	20.31	56.74	80.80	-24.06	Vertical
867.8400	14.71	27.64	42.35	60.80	-18.45	Vertical
433.9200	35.17	20.31	55.48	80.80	-25.32	Horizontal
867.8400	14.48	27.64	42.12	60.80	-18.68	Horizontal

For 1GHz-5GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

AV =PK + duty cycle factor

Frequency (MHz)	Duty cycle factor	Reading (dB μ V/ m)	Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarizati on
				AV	PEAK	AV	PEAK	AV	PEAK	
1301.760	-14.12	71.37	-12.20	45.05	59.17	60.80	80.80	-15.75	-21.63	Vertical
1735.680	-14.12	62.37	-10.40	37.85	51.97	60.80	80.80	-22.95	-28.83	Vertical
2169.600	-14.12	54.72	-8.38	32.22	46.34	60.80	80.80	-25.58	-34.46	Vertical
1301.760	-14.12	72.00	-12.20	45.68	59.80	60.80	80.80	-15.12	-21.00	Horizontal
1735.680	-14.12	70.04	-10.40	45.52	59.64	60.80	80.80	-15.28	-21.16	Horizontal
2169.600	-14.12	59.91	-8.38	37.41	51.53	60.80	80.80	-23.39	-29.27	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. *: Denotes restricted band of operation.

Measurements were made using a peak detector, the AV value computed by duty cycle factor. Any emission falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

FCC Limit for Measurement = $41.6667(433.92) - 7083.3333 = 10996.6812 \mu\text{V/m} = 80.8 \text{ dB}\mu\text{V/m}$

Pulse Width (PW) = $0.49\text{ms} * 17 = 8.33\text{ms}$

$1/\text{PW} = 1/8.33\text{ms} = 0.12004\text{kHz}$

$\text{RBW}(100 \text{ kHz}) > 1/\text{PW} (0.12004\text{kHz})$

Therefore PDCF is not needed.

Duty cycle = $(\text{Ton} / (\text{Toff} + \text{Ton})) * 100\% = (8.33/42.30) * 100\% = 19.69\%$

Duty cycle factor = $20\log(\text{Duty cycle}) = 20\log(0.1969) = -14.12$


5. 20DB OCCUPIED BANDWIDTH

5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators



5.1.2. Semi-Anechoic Chamber Test Setup Diagram

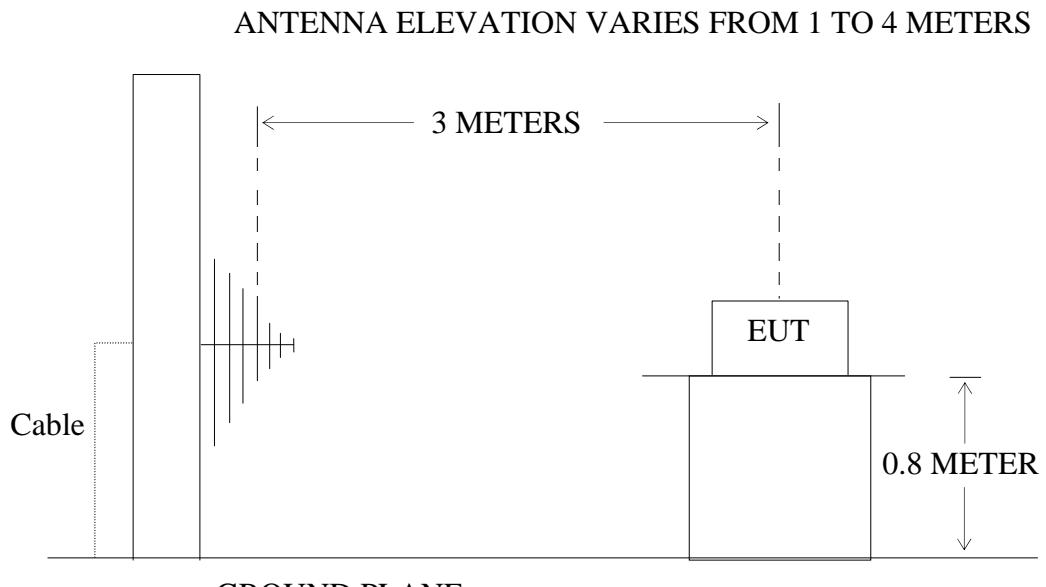

5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is $433.92 \text{ MHz} \times 0.25\% = 1.0848 \text{ MHz}$. Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

5.3.EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1.KEY FINDER (EUT)

Model Number : LD2519
Serial Number : N/A
Manufacturer : SHENZHEN ECARE ELECTRONICS CO., LTD

5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3.Let the EUT work in TX mode measure it.

5.5.Test Procedure

5.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 10 kHz, VBW = 30 kHz, Span = 500 kHz.

5.5.2.Set SPA Max hold, Mark peak, -20 dB.

5.6.Measurement Result

The EUT does meet the FCC requirement.

-20 dB bandwidth = 27.0 kHz.

$(27.0 \text{ kHz}/433.92\text{MHz}) * 100\% = 0.0062\% < 0.25\%$

The spectral diagrams in appendix I.

6. RELEASE TIME MEASUREMENT

6.1. Block Diagram of Test Setup


6.1.1. Block diagram of connection between the EUT and simulators



(EUT: KEY FINDER)

6.1.2. Semi-Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

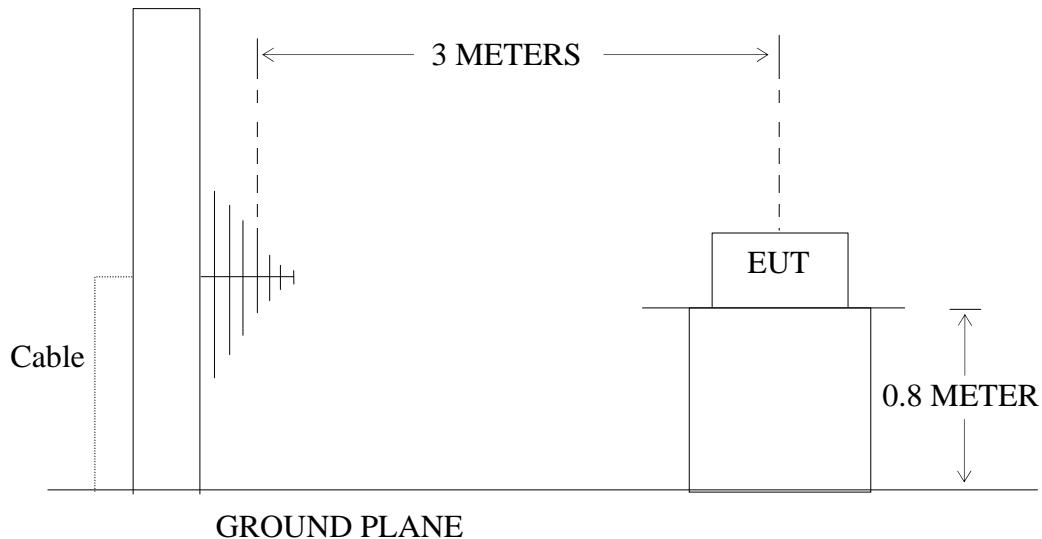

(EUT: KEY FINDER)

6.2. Release Time Measurement According To FCC Part 15 Section 15.231(a)

Section 15.231(a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

6.3.EUT Configuration on Measurement

The following equipment are installed on Release Time Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. KEY FINDER (EUT)

Model Number : LD2519
Serial Number : N/A
Manufacturer : SHENZHEN ECARE ELECTRONICS CO., LTD

6.4.Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX mode measure it.

6.5.Test Procedure

6.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 100 kHz, VBW = 300 kHz, Span = 0 Hz. Sweep time = 60 s.

6.5.2. Set EUT as normal operation and press Transmitter button.

6.5.3. Set SPA View. Delta Mark time.

6.6. Measurement Result

The release time less than 5 seconds.

Release Time = 3.96s

The spectral diagrams in appendix I.


7. ANTENNA REQUIREMENT

7.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2. Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

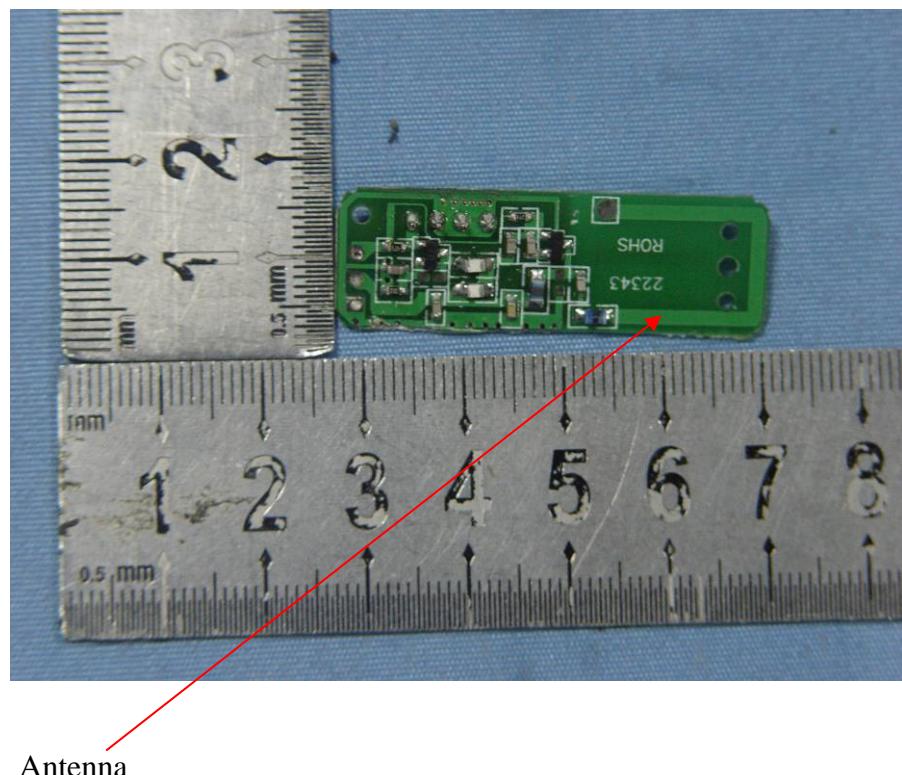

APPENDIX I (Test Curves)




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: rucky #240	Polarization: Horizontal
Standard: FCC-433MHz	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/11/03
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 10:56:47
EUT: KEY FINDER	Engineer Signature: Ricky
Mode: TX	Distance: 3m
Model: LD2519	
Manufacturer: SHENZHEN ECARE ELECTRONICS CO., LTD	
Note:	

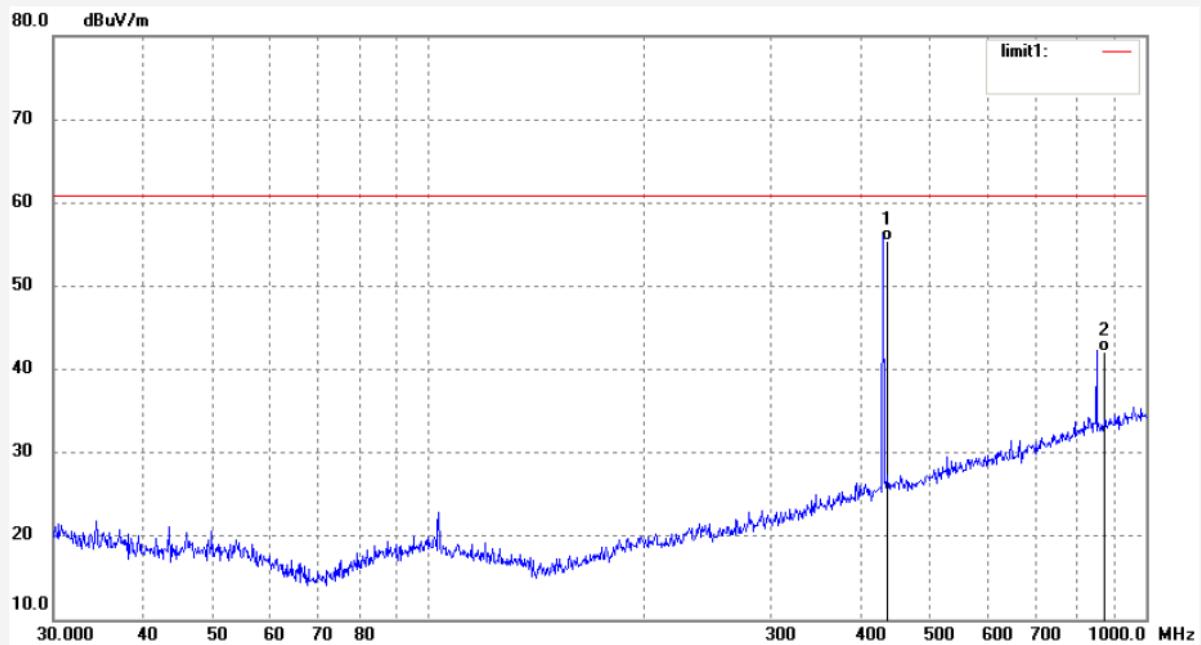

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.9200	35.17	20.31	55.48	80.80	-25.32	QP			
2	867.8400	14.48	27.64	42.12	60.80	-18.68	QP			



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: rucky #241	Polarization: Vertical
Standard: FCC-433MHz	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/11/03
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 11:04:34
EUT: KEY FINDER	Engineer Signature: Ricky
Mode: TX	Distance: 3m
Model: LD2519	
Manufacturer: SHENZHEN ECARE ELECTRONICS CO., LTD	

Note:

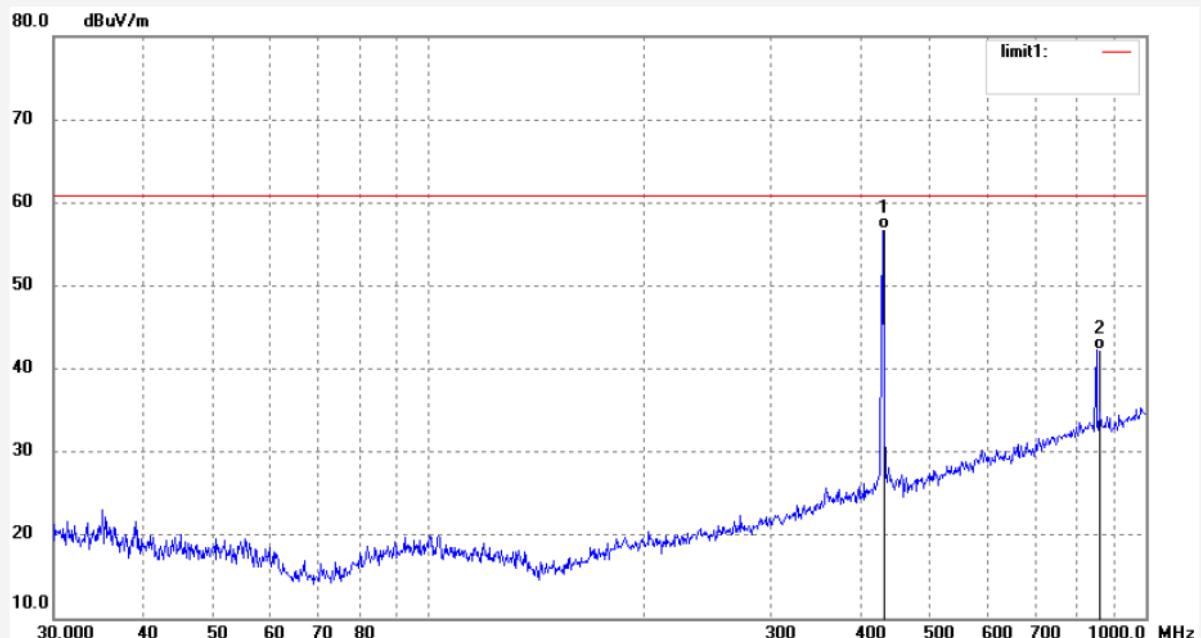

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.9200	36.43	20.31	56.74	80.80	-24.06	QP			
2	867.8400	14.71	27.64	42.35	60.80	-18.45	QP			



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	RUCKY #245	Polarization:	Horizontal
Standard:	FCC-433MHz above1G	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	12/11/10/
Temp.(C)/Hum.(%)	23 C / 49 %	Time:	8/08/34
EUT:	KEY FINDER	Engineer Signature:	Ricky
Mode:	TX	Distance:	3m
Model:	LD2519		
Manufacturer:	NOEND INDUSTRIES CO., LTD		

Note:

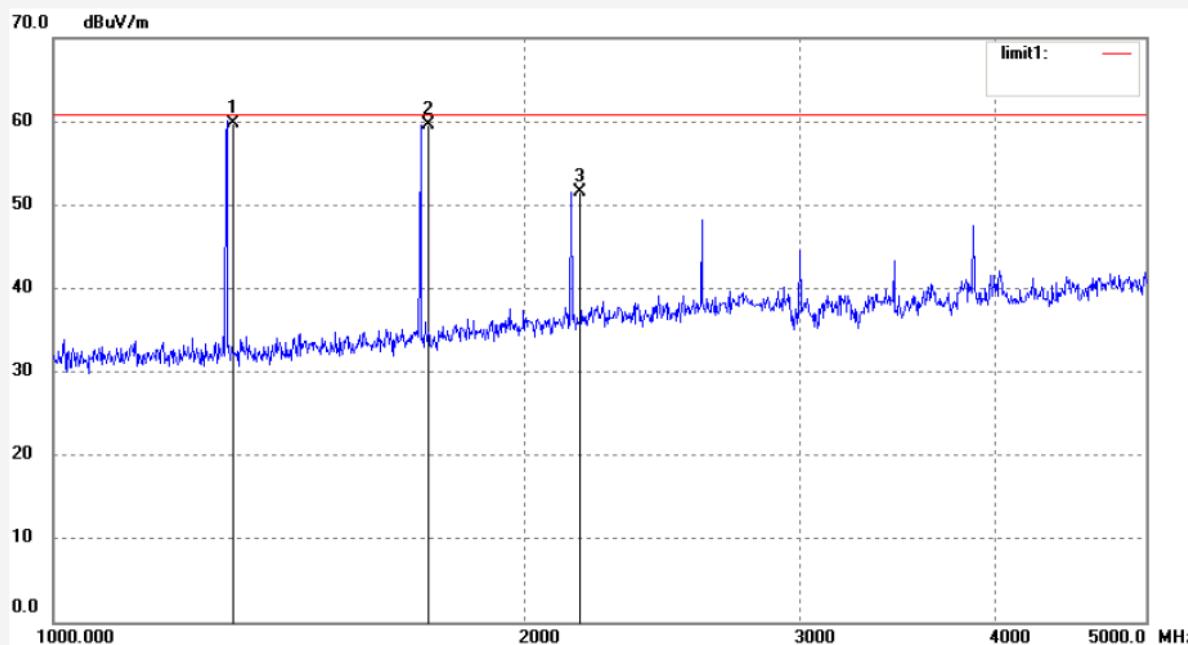

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1301.760	72.00	-12.20	59.80	80.80	-21.00	peak			
2	1735.680	70.04	-10.40	59.64	80.80	-21.16	peak			
3	2169.600	59.91	-8.38	51.53	80.80	-29.27	peak			


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396


Job No.: RUCKY #247
 Standard: FCC-433MHz above1G
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 49 %
 EUT: KEY FINDER
 Mode: TX
 Model: LD2519
 Manufacturer: NOEND INDUSTRIES CO., LTD

Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/11/10/
 Time: 8/21/56
 Engineer Signature: Ricky
 Distance: 3m


Note:

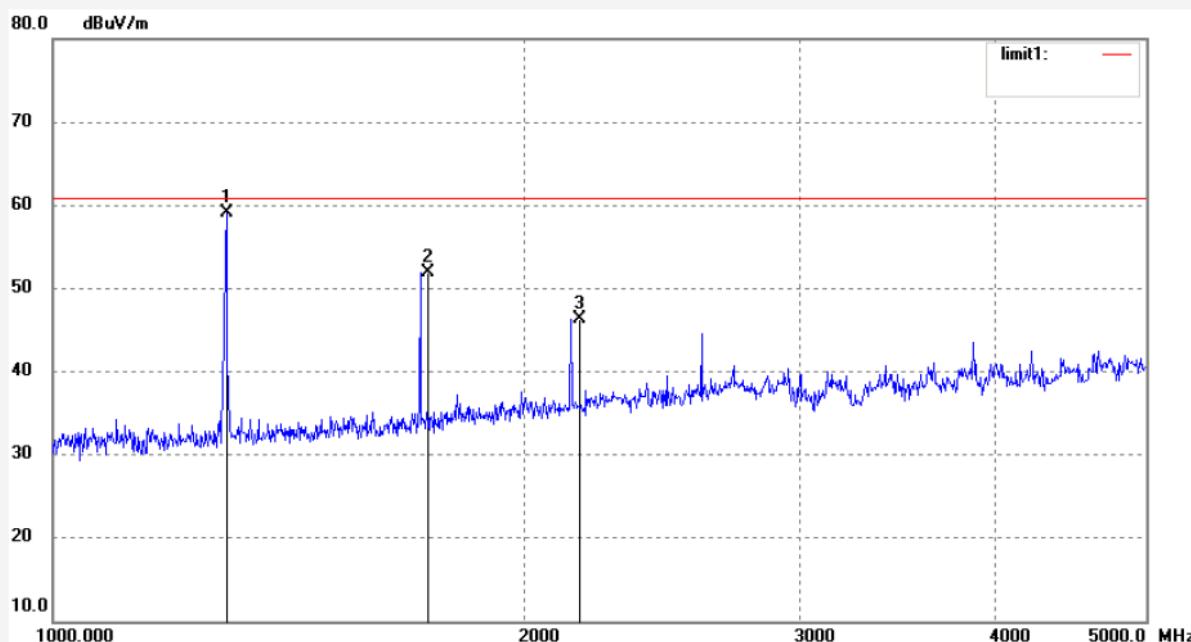


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1301.760	71.37	-12.22	59.15	80.80	-21.65	peak			
2	1735.680	62.37	-10.40	51.97	80.80	-28.83	peak			
3	2169.600	54.72	-8.38	46.34	80.80	-34.46	peak			

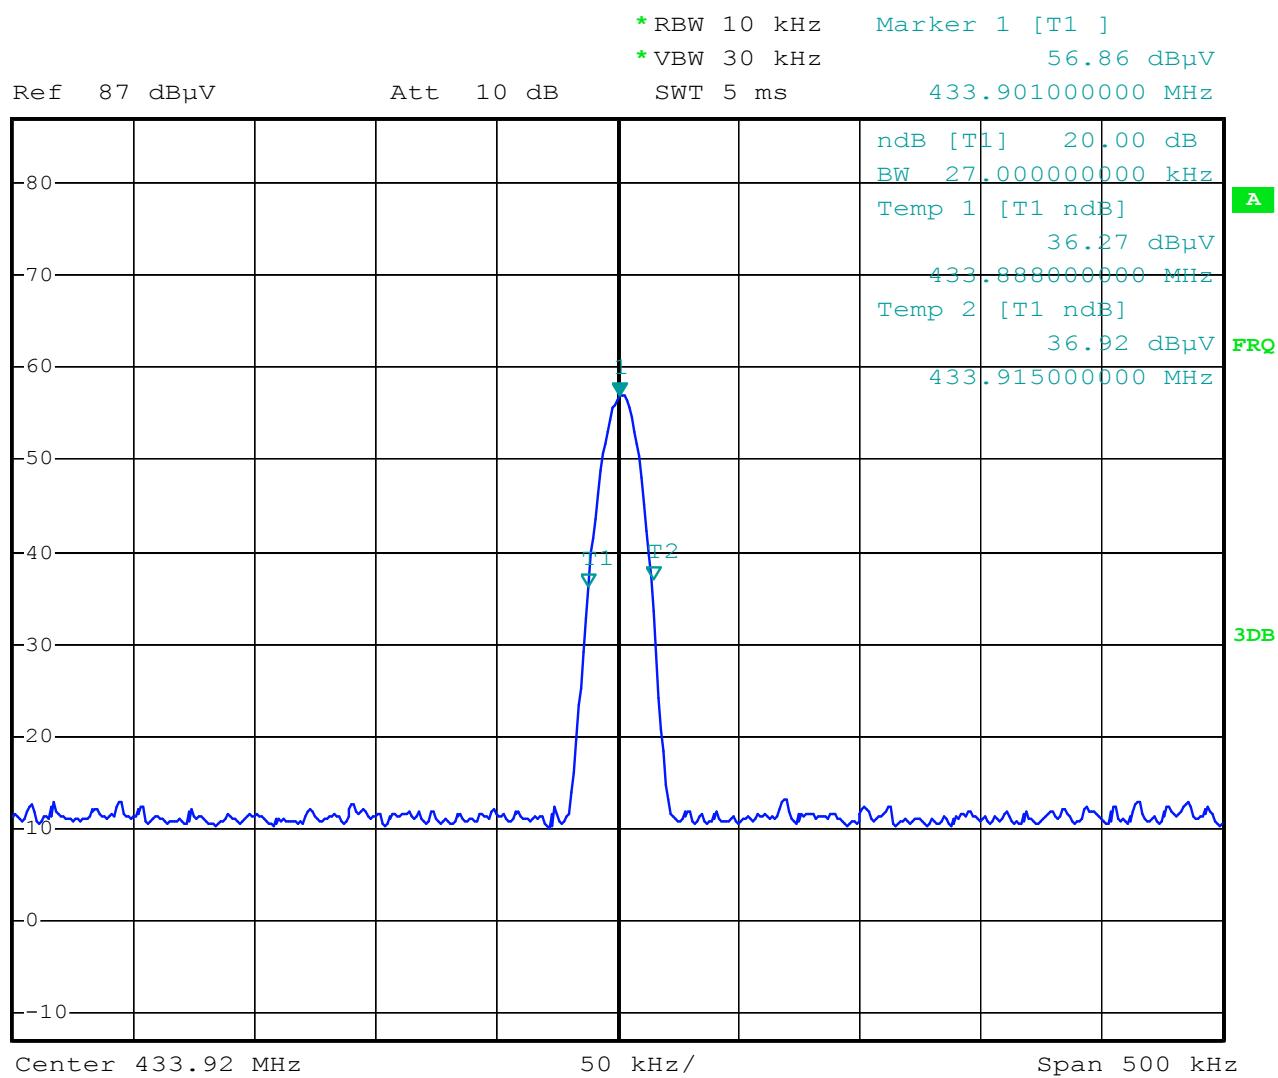


Date: 8.NOV.2012 16:30:14

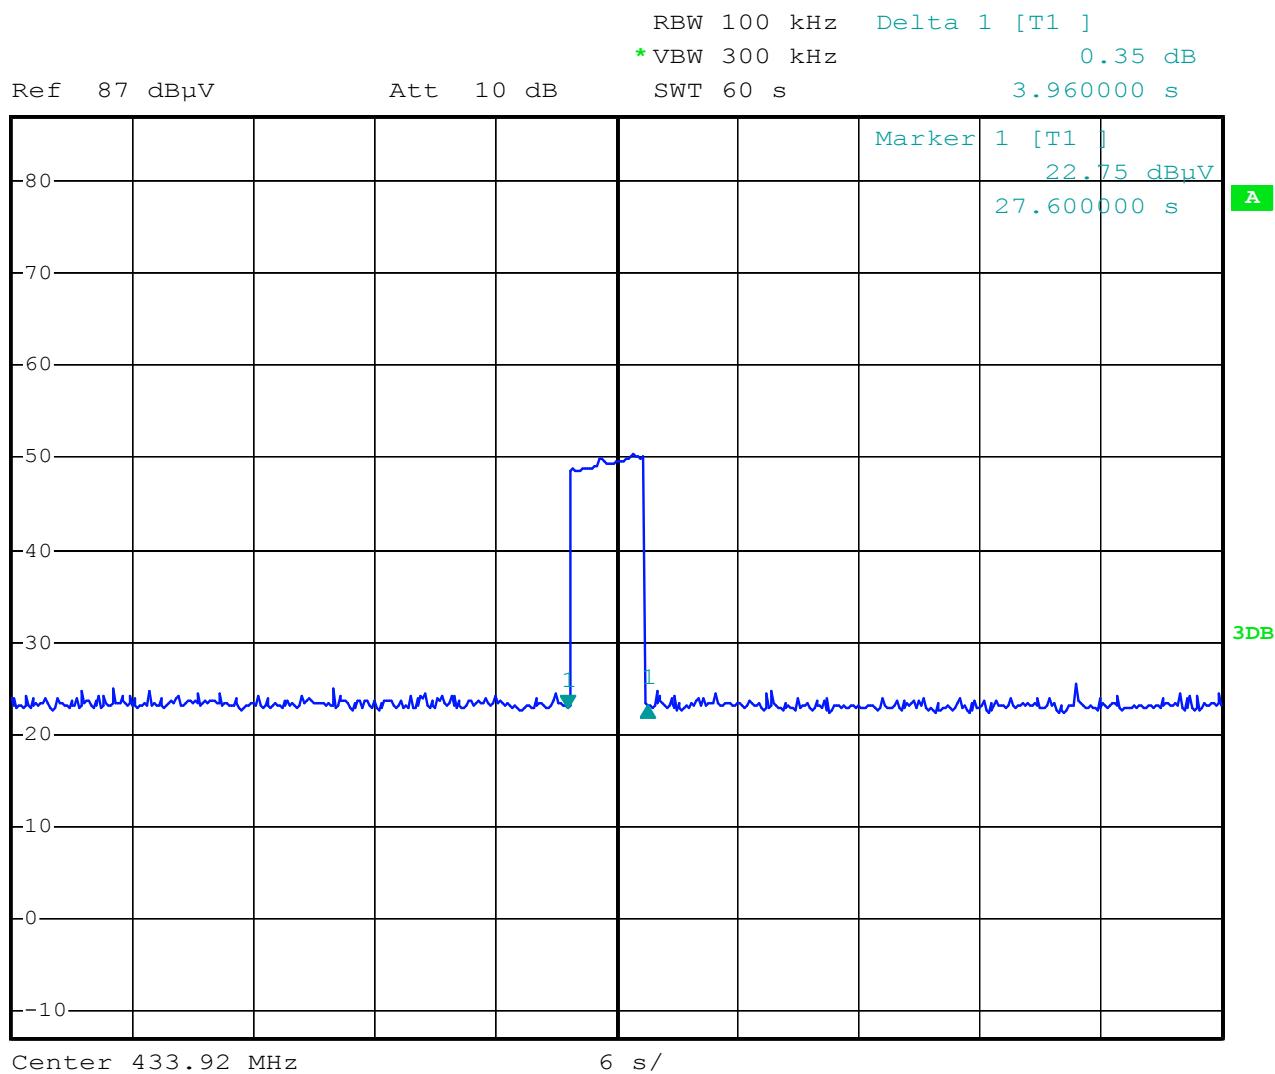

Date: 8.NOV.2012 16:42:28

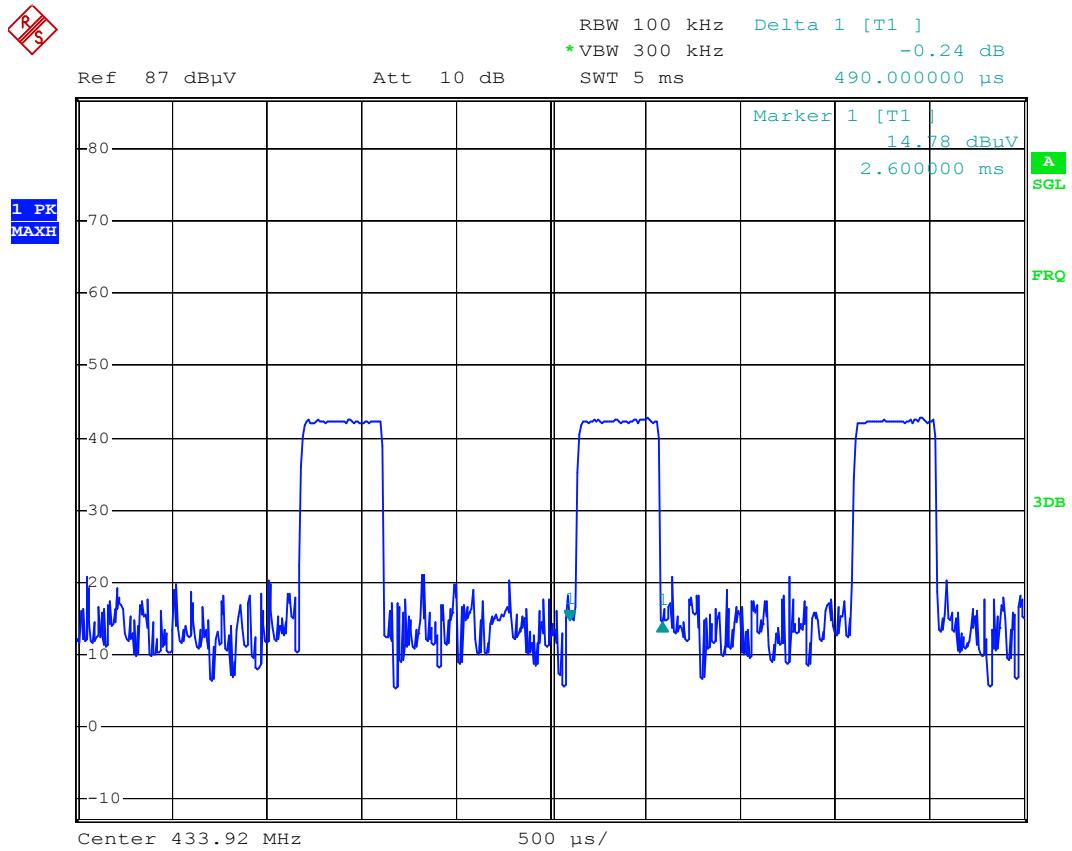

Date: 13.NOV.2012 15:43:54

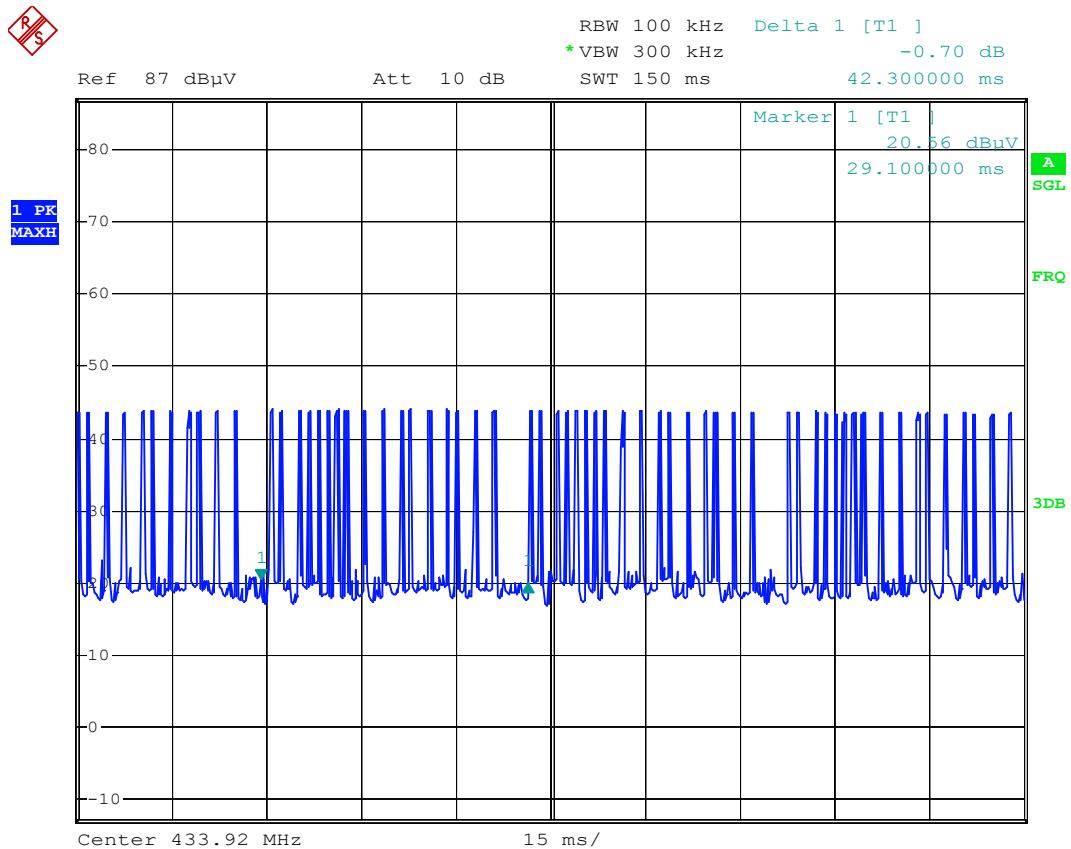

Date: 13.NOV.2012 15:38:31