



AEGIS LABS INC.



Modular Approval
Test Report
And Application for Grant of Equipment Authorization

Pertaining To:

| EUT | FCC ID: |
|---|------------------|
| Wireless Embedded Device Server, Model: WiPort | R68WIPORT |

| Configuration |
|---|
| 802.11b module with a HyperLink Technologies Antenna |

MEASUREMENTS PERFORMED IN ACCORDANCE WITH

| Regulatory Standard(s) |
|---|
| 47 CFR Part 15, Subpart C Section 15.247 |

Test Method:

ANSI C63.4: 2001 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



Certificate Number: 1111.01

APPLICANT:

Lantronix, Inc.
15353 Barranca Parkway
Irvine, California 92618

Contact(s): Trish Selbo

PREPARED BY:

Aegis Labs, Inc.
22431 Antonio Parkway B160-417
Rancho S. Margarita, CA 92688

Agent(s): Mr. Steve Kuiper
Mr. Rick Candelas

| REPORT BODY | APPENDICES | TOTAL PAGES |
|-------------|------------|-------------|
| 17 | A | |
| 31 | | |
| 48 | | |

Test Report #: LANTR-041213F
Test Report Revision: None

The contents of this report shall not be reproduced except in full, without the written approval of Aegis Labs, Inc.

Page 1 of 17

Report Number: LANTR-041213F

FCC ID: R68WIPORT



AEGIS LABS INC.

TABLE OF CONTENTS

| SECTION | TITLE | PAGE |
|------------|--|-----------|
| | COVER SHEET..... | 01 |
| | TABLE OF CONTENTS..... | 02 |
| 1.0 | CERTIFICATION OF TEST DATA..... | 03 |
| 2.0 | SUMMARY OF TEST RESULTS..... | 04 |
| 3.0 | ADMINISTRATIVE DATA AND TEST DESCRIPTION..... | 05 |
| 4.0 | DESCRIPTION OF EUT..... | 06 |
| 4.1 | EUT Description..... | 06 |
| 4.1.1 | Channel Number and Frequencies..... | 07 |
| 4.2 | EUT Configuration..... | 08 |
| 4.3 | List of EUT Sub-Assemblies and Host Equipment..... | 09 |
| 4.4 | I/O Cabling Diagram and Description..... | 10 |
| 5.0 | TEST EQUIPMENT AND TEST SETUPS..... | 12 |
| 5.1 | AC Power Line Conducted Emissions..... | 12 |
| 5.2 | Spurious Radiated Emissions..... | 13 |
| 5.3 | Conducted Emissions At The Antenna Port..... | 13 |
| 5.4 | Test and Measurement Equipment Used..... | 14 |
| 6.0 | SAMPLE CALCULATIONS..... | 15 |
| 7.0 | MODIFICATIONS AND RECOMMENDATIONS..... | 17 |

APPENDICES

A

Test Data

Page 2 of 17
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

1.0 CERTIFICATION OF TEST DATA

Aegis Labs, Inc. operates as both a Nevada and California Corporation with no organizational or financial relationship with any company, institution, or private individual.

Testing and engineering functions provided by Aegis Labs are furnished through the use of part-time, full-time or consulting engineers with the appropriate qualifications to carry out their duties. The intended purpose of this test report is to describe the measurement procedure and to determine whether the equipment under test "EUT" complies with both the conducted and radiated limits. Limits for emissions testing are described under Subpart C of Part 15 of the FCC rules.

The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the Equipment Under Test (EUT) under the requirements specified in the emissions standard as described below. The test results contained in this report are only representative of the test sample tested as described in Section 3.0 of this report. Certification of the EUT is required as a prerequisite to marketing as defined in Part 2 of the FCC Rules.

Prepared By:

12/20/04

Rick Candelas
Staff Engineer
Aegis Labs, Inc.

Report Approved By:

12/20/04

Steve J. Kuiper
Quality Assurance Manager
Aegis Labs, Inc.



AEGIS LABS INC.

2.0 SUMMARY OF TEST RESULTS

The test results provided within this report, indicate that the EUT has been found to be in **COMPLIANCE** with the test specifications based upon the following RF compliance standards:

Pass/Fail determination is based upon the nominal values of the test data.

802.11b Mode (2400-2483.5 MHz)

| EMISSIONS STANDARD | | | |
|---------------------|--|---------|---|
| FCC Part 15 Section | Description | Results | Comments |
| 15.247(a)(2) | The minimum 6dB bandwidth shall be at least 500 kHz. | PASSED | 2412 MHz = 12.17 MHz 2437 MHz = 12.08 MHz 2462 MHz = 12.17 MHz |
| 15.247(b)(1) | The maximum peak output power of the intentional radiator shall not exceed 1 watt. | PASSED | 2412 MHz = 15.87 dBm = 38.64 mW 2437 MHz = 15.56 dBm = 35.97 mW 2462 MHz = 15.53 dBm = 35.73 mW |
| 15.247(b)(4) | The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1). | PASSED | Refer to MPE Calculations Exhibit |
| 15.247(c) | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. | PASSED | See Data Sheets |
| 15.247(c) | Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc. | PASSED | See Data Sheets |
| 15.247(d) | The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. | PASSED | 2412 MHz = -12.50 dB 2437 MHz = -13.17 dB 2462 MHz = -12.67 dB |
| 15.207 | AC Conducted Emissions | PASSED | See Data Sheets |
| 15.209 | Radiated Emissions (30-1000 MHz) | PASSED | See Data Sheets |



AEGIS LABS INC.

3.0 ADMINISTRATIVE DATA AND TEST DESCRIPTION

| | |
|----------------------------------|---|
| DEVICE TESTED: | ITE Type: Wireless Embedded Device Server Model Number(s): WiPort Serial Number: None FCC ID: R68WIPORT |
| TEST DATE(S): | December 13, 2004 |
| DATE EUT RECEIVED: | December 12, 2004 |
| ORIGIN OF TEST SAMPLE(S): | Production Unit |
| RESPONSIBLE PARTY: | Lantronix, Inc. 15353 Barranca Parkway Irvine, California 92618 |
| CLIENT CONTACT: | Trish Selbo |
| MANUFACTURER: | Lantronix, Inc. |
| TEST LOCATION: | Aegis Labs, Inc. 32231 Trabuco Creek Road Trabuco Canyon, CA 92678 Conducted Site #1 Radiated Site #1 |
| A2LA CERTIFICATE: | 1111.01, Valid through February 28, 2006 |
| PURPOSE OF TEST: | To demonstrate compliance with the relevant standards described in Section 2.0 of this report. |
| TEST(S) PERFORMED: | Refer to Table in Section 2.0 of this report. |

All calibration vendors were responsible for certifying Aegis Labs, Inc. test equipment as per the manufacturer's specifications and that the equipment is calibrated using instruments and standards where the accuracy is traceable to the National Institute of Standards and Technology (NIST). Calibration of all test equipment conforms to ANSI/NCSL Z540-1 and ISO 10012-1 and/or ISO/IEC Guide 17025 compliance (Additionally, other pertinent test equipment will carry MIL-STD-45662A). All calibration documents are on file with Aegis Labs, Inc., with copies provided upon request.



AEGIS LABS INC.

4.0 DESCRIPTION OF EUT

4.1 EUT Description

| Equipment Under Test (EUT) | |
|---|---|
| Trade Name: | Wireless Embedded Device Server |
| Model Number: | WiPort |
| Frequency Range: | 802.11b = 2400 – 2483.5 MHz |
| Type of Transmission: | Direct Sequence Spread Spectrum |
| Transfer Rate: | 1/5.5/11 Mbps for 802.11b mode |
| Number of Channels: | 802.11b mode (2400-2483.5 MHz) = 11 |
| Modulation Type: | DBPSK, DQPSK, CCK |
| Antenna Type: | External Antenna with Reverse SMA connector |
| Antenna Gain (See Note 2): | 2.45 GHz = 2.20 dBi |
| Transmit Output Power: | 16 dBm (Typical) for 802.11b mode Please see Appendix A (Data Sheets) for actual output power. |
| Power Supply: | 9-30VDC (2.5 W max) DC input from external 120VAC Adapter |
| Number of External Test Ports Exercised: | 1 Antenna Port, 2 Serial Ports, 1 Network Port |

The Wireless Embedded Device Server provides a network-enabling solution based on the IEEE 802.11b wireless standard. WiPort allows Original Equipment Manufacturers (OEMs) to add wireless connectivity to their products by incorporating it onto a circuit board.

It was tested as a standalone device with a HyperLink Technologies (PN: HG2403RD-RSF) antenna continuously transmitting and receiving from the antenna port.

NOTE 1: For a more detailed description, please refer to the manufacturer's specifications or User's Manual.

NOTE 2: The EUT was tested with a set of antennas (HyperLink Technologies). (Refer to the antenna specifications exhibits).



AEGIS LABS INC.

4.1.1 Channel Number and Frequencies

| 802.11b Mode | |
|--------------|-----------------|
| Channel | Frequency (MHz) |
| 1 | 2412 |
| 2 | 2417 |
| 3 | 2422 |
| 4 | 2427 |
| 5 | 2432 |
| 6 | 2437 |
| 7 | 2442 |
| 8 | 2447 |
| 9 | 2452 |
| 10 | 2457 |
| 11 | 2462 |

Page 7 of 17
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

4.2 EUT Configuration

The EUT was tested as a standalone device connected to a remotely located Belkin 5-Port Network Switch via its network port. The Belkin 5-Port Network Switch was then connected to an eMachines computer via its network port. The eMachines computer was then connected to a Kogi monitor, an eMachines keyboard and mouse via its video, keyboard and mouse ports respectively. Serial ports 1 & 2 were connected in a loop back configuration. A HyperLink Technologies external antenna was connected to the EUT's antenna ports via its reverse SMA antenna connector. Data for the HyperLink Technologies antenna can be found in Appendix A (Data Sheets).

The low, middle, and high channels were tested in 802.11b mode. The EUT was placed in either continuous transmit or continuous receive mode by a program provided by the manufacturer (*RTS Ver. 2_3*).

Page 8 of 17
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

4.3 List of EUT, Sub-Assemblies, and Host Equipment

| LIST OF EUT AND SUB-ASSEMBLIES | | | |
|---------------------------------------|-------------------------|---------------------|----------------------|
| Equipment Name | Manufacturer | Model Number | Serial Number |
| Wireless Embedded Device Server | Lantronix, Inc. | WiPort | None |
| EUT Sub-Assemblies | | | |
| External Antenna | HyperLink Technologies | HG2403RD-RSF | N/A |
| AC Adaptor | Regal Electronics, Inc. | JK-12101-N | 401 |

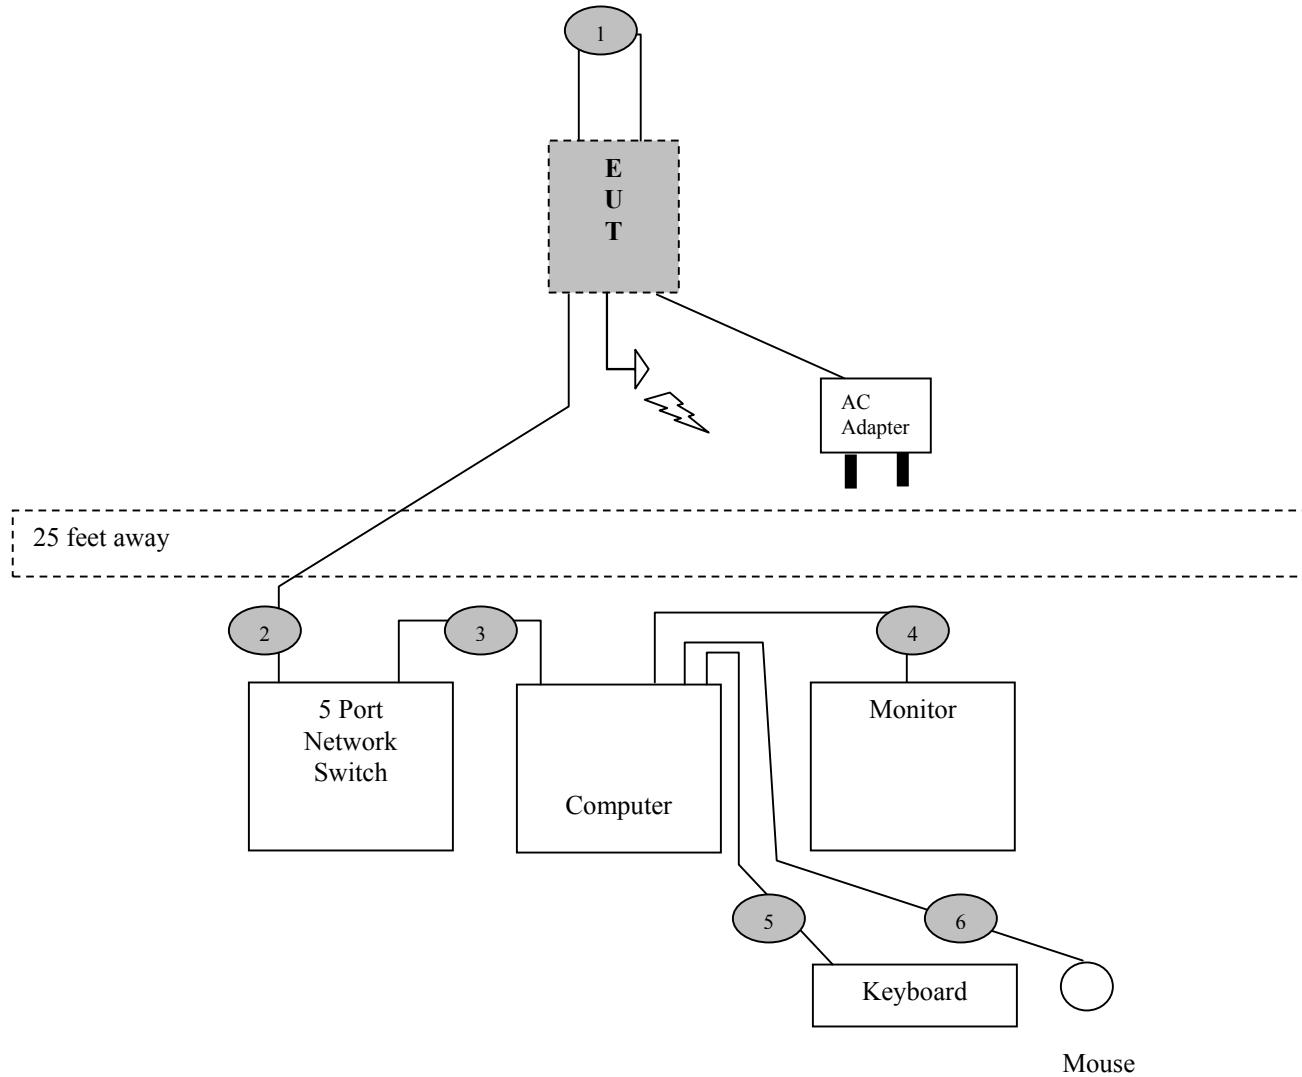
| HOST EQUIPMENT LIST | | | |
|----------------------------|---------------------|---------------------|----------------------|
| Equipment Name | Manufacturer | Model Number | Serial Number |
| Computer | eMachines | T2842 | QIV42B0201284 |
| LCD Monitor | Kogi | L7CH | G7NX33800158 |
| Keyboard | EMachines | KB-9908 | 1358924A13400720B |
| Mouse | EMachines | SAGM002 | 133771SYS1440074 |
| 5-Port Network Switch | Belkin | F5D5131-5 | None |

NOTE: All the power cords of the above support equipment are standard non-shielded, 1.8 meters long.



AEGIS LABS INC.

4.4 I/O Cabling Diagram and Description



Cable 1: This is a 6-foot braid and foil shielded round cable connecting the EUT's serial port 1 and serial port 2 in loop back configuration. It has metallic DB-9 type connector at both ends. The cable is bundled to a length of one meter and the shield of the cable is grounded to the chassis via the connector shells.

Cable 2: This is a 25-foot unshielded twisted pair cable connecting the EUT's Network port to the Belkin 5-Port Network Switch. It has a plastic RJ-45 type connector on both ends.



AEGIS LABS INC.

4.4 I/O Cabling Diagram and Description (Continued)

Cable 3: This is a 5-foot unshielded twisted pair cable connecting the Belkin 5-Port Network Switch to the eMachines computer. It has a plastic RJ-45 type connector on both ends.

Cable 4: This is a 6-foot braid and foil shielded round cable connecting the eMachines computer to the Kogi LCD monitor. It has metallic DB-15 type connector at the computer end and is hardwired to the monitor. The cable is bundled to a length of one meter and the shield of the cable is grounded to the chassis of both devices via the connector shells.

Cable 5: This is a 6-foot braid and foil shielded round cable connecting the eMachines computer to the eMachines keyboard. It has a metallic 6-pin mini din type connector at the computer end and is hardwired to the keyboard. The shield of the cable is grounded to the chassis of the computer via the connector shell.

Cable 6: This is a 6-foot braid and foil shielded round cable connecting the eMachines computer to the eMachines mouse. It has a metallic 6-pin mini din type connector at the computer end and is hardwired to the mouse. The shield of the cable is grounded to the chassis of the computer via the connector shell.



AEGIS LABS INC.

5.0 TEST EQUIPMENT AND TEST SETUPS

The test equipment settings and functions are selected using the guidance of ANSI C63.4-2001. All test equipment setups and operations during conducted and radiated emissions testing are in accordance with this reference document.

5.1 AC Power Line Conducted Emissions

During conducted emissions measurements, a spectrum analyzer was used as the measuring instrument along with a preselector and quasi-peak detector. A 10 dB attenuation pad was used for the protection of the spectrum analyzer input stage. The conducted emissions from the EUT in the frequency range from 150 kHz to 30 MHz were captured for graphical display through the use of automated LABVIEW EMI measurement software. All graphical readings were measured in the “Peak” mode only to reduce testing time. Upon completion of the graphical scan, the test lab personnel performed the conducted measurement scan manually using the spectrum analyzer front panel keys. All peak measurements coming within 3 dB of the limit line were “Averaged” and/or “Quasi-Peaked” and denoted appropriately in the EXCEL spreadsheet.

The Equipment Under Test (EUT) was configured as a system with peripherals connected, so that at least one interface port of each type is connected to one external peripheral when tested for conducted emissions according to ANSI C63.4: 2001. Excess power cord length was wrapped in a bundle 30 to 40 centimeters in length near the center of the cord. The EUT was tested in a tabletop configuration.

The emission readings for Line 1 and Line 2 are highlighted on the data sheets in Appendix A. The graphical scans only reflects peak readings while the tabulated data sheets reflect peak, average, and/or quasi-peak readings which ever applies.



AEGIS LABS INC.

5.2 Spurious Radiated Emissions

A spectrum analyzer was used as the measuring instrumentation along with a preselector and quasi-peak-detector. The pre-amplifiers were used to increase the sensitivity of the instrument. The spectrum analyzer was used in the peak detector mode with the “max-hold” feature activated and in Positive Peak mode. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. The quasi-peak detector was used only for those readings, which are marked accordingly in the data sheet. The effective measurement bandwidth used for the radiated emissions test was 120 kHz for (30 MHz- 1000 MHz). The spectrum analyzer operated such that the modulation of the signal was filtered out to set the analyzer in linear mode. For testing beyond 1000 MHz a spectrum analyzer capable of taking reading above 1000 MHz was connected to the high frequency amplifier, where these measurement readings were taken with the transducer placed at a 3-meter test distance from the EUT.

The Open Area Test Sites (OATS) was used for radiated emission testing. These test sites are designed according to ANSI C63.4: 2001 and ANSI C63.7: 1992 guidelines. The Measurements were conducted in accordance with ANSI C63.4: 2001 and ANSI C63.7: 1992 requirements.

Broadband biconical, log periodic, and horn antennas were used as transducers during the measurement reading phase. The frequency spans were wide (30 MHz-88 MHz, 88 MHz- 216 MHz, 216 MHz- 300 MHz, and 300 MHz- 1000 MHz). After 1000 MHz the horn antenna was used to measure emissions. The emission readings in both horizontal and vertical polarities are highlighted on the data sheets in Appendix A.

5.3 Conducted Emissions at the Antenna Port

A spectrum analyzer or power meter was used as the measuring instrumentation along with an attenuator and/or filter connected to the EUT antenna port. The attenuator and filters are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission. The instruments recorded the measured readings with the bandwidths (video and resolution) set in accordance with the FCC Rules and regulations.

For the power out measurements in 802.11b and 802.11g modes a peak power meter was used along with a peak power sensor with a wide enough bandwidth to capture the entire fundamental transmission. For 802.11a mode a spectrum analyzer with “Channel Power Measurement” function was used to measure the peak output power.

The measured readings are on the data sheets in Appendix A.



AEGIS LABS INC.

5.4 Test and Measurement Equipment Used

| TEST EQUIPMENT USED | | | | | |
|---|-------------------|------------------|---------------|----------------------|-------------------|
| Equipment Name | Manufacturer | Model Number | Serial Number | Calibration Due Date | Calibration Cycle |
| EMI Receiver - RF Section | Hewlett Packard | 85462A | 3325A00137 | 03/29/05 | 1 Year |
| EMI Receiver – RF Filter Section | Hewlett Packard | 85460A | 3330A00138 | 03/29/05 | 1 Year |
| Transient Limiter | Hewlett Packard | 11947A | 3107A02734 | 03/30/05 | 1 Year |
| LISN (EUT) | Solar Electronics | 9252-50-R-24-BNC | 961025 | 04/01/05 | 1 Year |
| LISN (Access) | Solar Electronics | 9252-50-R-24-BNC | 961024 | 04/01/05 | 1 Year |
| Spectrum Analyzer | Agilent | 8564EC | 4046A00387 | 02/06/06 | 2 Years |
| 1-18 GHz Preamplifier | Miteq | Aegis-Oats1-1-18 | 001 | 07/27/05 | 2 Years |
| 1-18 GHz Horn Antenna | ETS | 3117 | 00029614 | 07/23/05 | 2 Years |
| 2400-2483.5 MHz Notch Filter | Micro-Tronics | BRM50702-02 | 003 | 04/21/06 | 2 Years |
| Antenna - Biconical | EMCO | 3110B | 3383 | 11/01/05 | 1 Year |
| Antenna - Log Periodic | Electro-Metrics | LPA-25 | 1186 | 11/01/05 | 1 Year |
| 18-26.5 GHz Preamplified Antenna – Horn | Custom Microwave | H042 | 001 | 11/04/05 | 2 Year |
| Power Meter | Anritsu | ML2487A | 6K00001785 | 04/05/05 | 2 Years |
| Wide Bandwidth Sensor | Anritsu | MA2491A | 31193 | 04/05/05 | 2 Years |



AEGIS LABS INC.

6.0 SAMPLE CALCULATIONS

If a preamplifier is used during the Radiated Emissions Testing, it is required that the amplifier gain be subtracted from the Spectrum Analyzer (Meter) Reading. In addition, a correction factor for the antenna, cable and a distance factor, if any, must be applied to the Meter Reading before a true field strength reading can be obtained. In the Automatic Mode of A.R.M.S. measurements, these considerations are automatically presented as a part of the printout. In the case of manual measurements and for greater efficiency and convenience, usage of the calibration correction factors in the Appendices is necessary to calculate the Corrected Meter Reading. These correlation factors for each meter reading, shall be modified to reflect these correlation factors at each frequency value so that the meter readings can be compared directly to the modified specification limit. This modified specification limit is referred to as the "Corrected Meter Reading Limit" (CML).

The equation shall be derived in the following manner:

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - G - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + G + D$$

For the manual mode of measurement, a table of corrected meter reading limits shall be used to permit immediate comparison of the meter reading to determine if the measured emission amplitude exceeded the specification limit at that specific frequency. There shall be two calculation sheets done, one for three meter and one for ten-meter measurement distances, where applicable. The correction factors for the antenna and the amplifier gain are attached in the Appendices.



AEGIS LABS INC.

6.0 Sample Calculations (Continued)

Peak Transmit Power Output:

A correction factor for the cable must be applied to the Conducted Power before a true power reading can be obtained. This is referred to as the “Corrected Power” (CP).

The equation shall be derived in the following manner:

Corrected Power Reading = Conducted Power Reading + C

Where, C = Cable Factor

The conducted power is taken in units of dBm. To obtain units of mW the following equation is used:

$$mW = 10^{(dBm/10)}$$



AEGIS LABS INC.

7.0 MODIFICATIONS AND RECOMMENDATIONS

No modifications were made to the EUT.

*Page 17 of 17
Report Number: LANTR-041213F
FCC ID: R68WIPORT*



AEGIS LABS INC.

APPENDIX A

TEST DATA

Page 1 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

AC POWER LINE CONDUCTED EMISSIONS TEST RESULTS

| | | | |
|-----------------------|--|------------------------|-----------------|
| CLIENT: | Lantronix, Inc. | DATE: | 12/13/04 |
| EUT: | Wireless Embedded Device Server | PROJECT NUMBER: | LANTR-040324-03 |
| MODEL NUMBER: | WiPort | TEST ENGINEER: | RC |
| SERIAL NUMBER: | None | SITE #: | 1 |
| CONFIGURATION: | Tested in wireless mode with the HyperLink Technologies Antenna. | TEMPERATURE: | 12 C |
| | | HUMIDITY: | 55% RH |
| | | TIME: | 1:00 PM |

| | |
|---------------------|-----------------------------------|
| Standard: | FCC CFR 47, Part 15.207 |
| Description: | AC Power Line Conducted Emissions |
| Results: | Passes the conducted limits |

| Conducted Limits | | |
|------------------|-------------------------|----------------------|
| Frequency (MHz) | Quasi-Peak Limit (dBuV) | Average Limit (dBuV) |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

NOTE: During preliminary scans, there wasn't any difference which mode, channel, or data rate was used with the EUT; therefore only 802.11b mode at Channel 1 with a data rate of 1 Mbps was used for final testing.

Page 2 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT

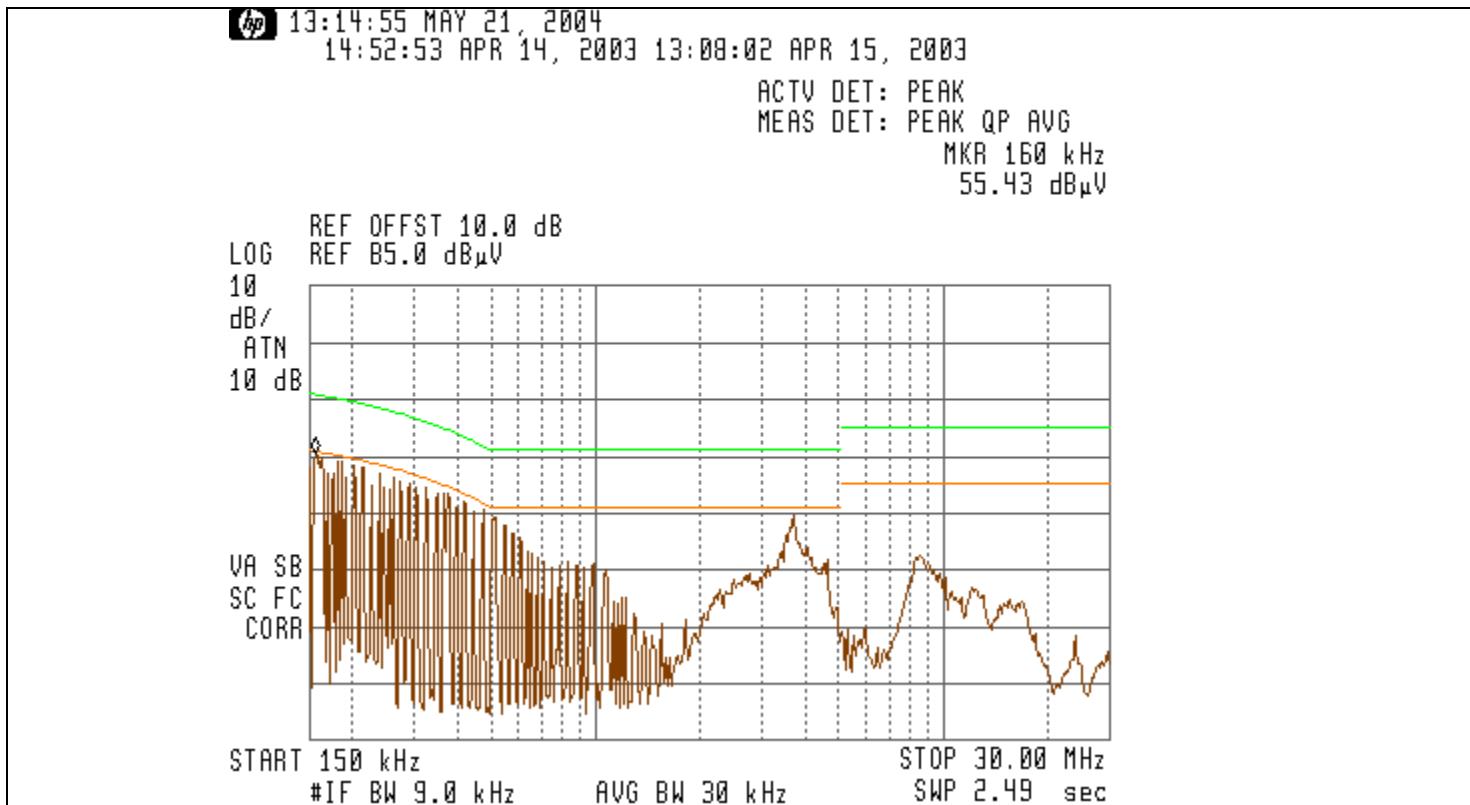


AEGIS LABS INC.

AC Power Line Conducted Emissions Test Results (Continued)

CONDUCTED EMISSIONS – LINE 1

| Freq. (MHz) | Meter Reading (dB _u V) | Detector (PK/QP/AV) | Average Limit (dB _u V) | Average Delta(dB) | Quasi-Peak Limit (dB _u V) | Quasi-Peak Delta(dB) |
|----------------|--------------------------------------|------------------------|--------------------------------------|----------------------|---|-------------------------|
| 0.1500 | 18.28 | AV | 56.00 | -37.72 | 66.00 | -47.72 |
| 0.1600 | 18.17 | AV | 55.71 | -37.54 | 65.71 | -47.54 |
| 0.1700 | 18.15 | AV | 55.43 | -37.28 | 65.43 | -47.28 |
| 0.1800 | 16.54 | AV | 55.14 | -38.60 | 65.14 | -48.60 |
| 0.2000 | 17.96 | AV | 54.57 | -36.61 | 64.57 | -46.61 |
| 0.2100 | 17.16 | AV | 54.29 | -37.13 | 64.29 | -47.13 |



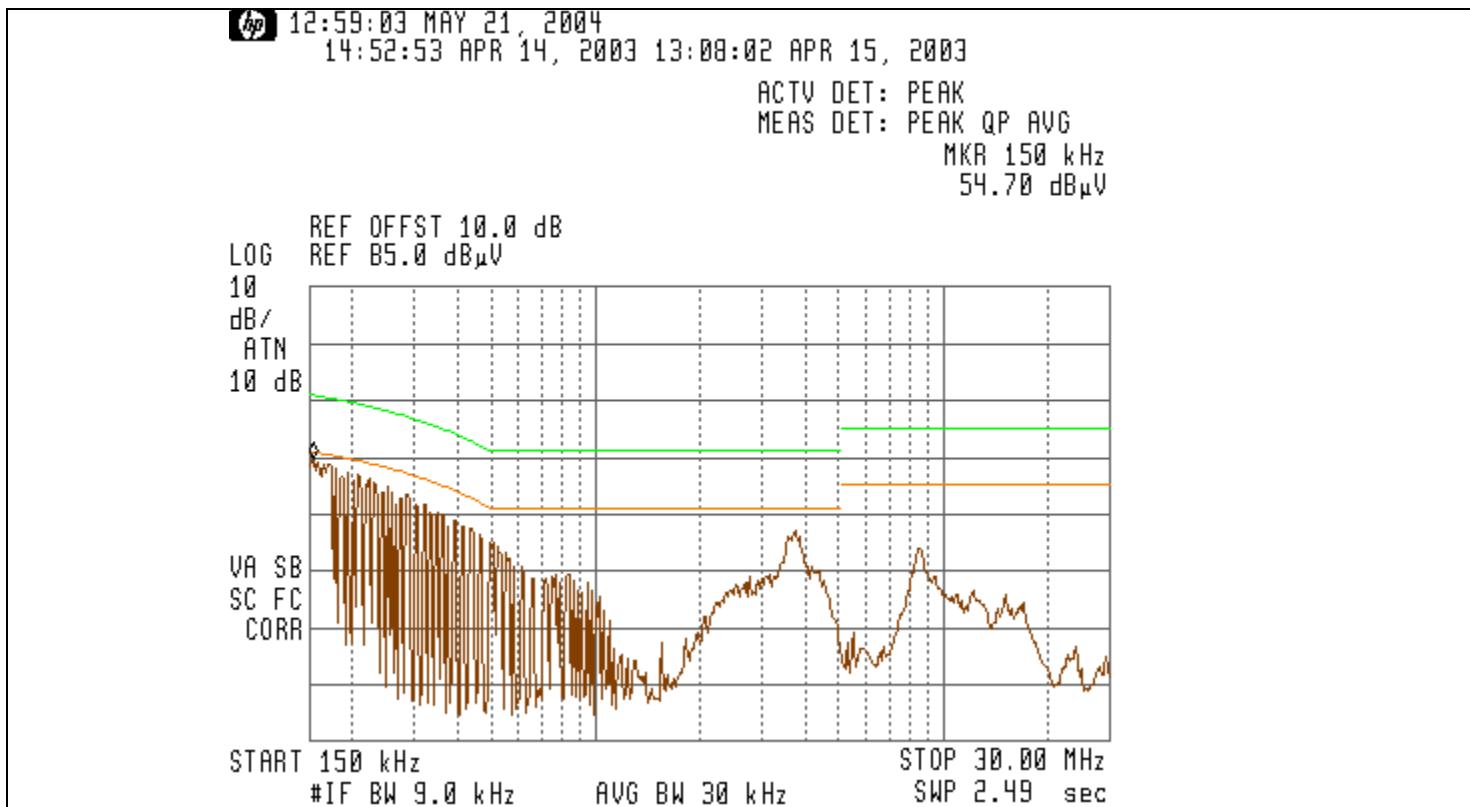
Page 3 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

AC Power Line Conducted Emissions Test Results (Continued)

| CONDUCTED EMISSIONS - LINE 2 | | | | | | |
|------------------------------|-------------------------|------------------------|-------------------------|----------------------|----------------------------|-------------------------|
| Freq. (MHz) | Meter Reading (dBuV) | Detector (PK/QP/AV) | Average Limit (dBuV) | Average Delta(dB) | Quasi-Peak Limit (dBuV) | Quasi-Peak Delta(dB) |
| 0.1500 | 17.00 | AV | 56.00 | -39.00 | 66.00 | -49.00 |
| 0.1800 | 15.73 | AV | 55.14 | -39.41 | 65.14 | -49.41 |
| 0.1900 | 17.35 | AV | 54.86 | -37.51 | 64.86 | -47.51 |
| 0.2000 | 17.71 | AV | 54.57 | -36.86 | 64.57 | -46.86 |
| 0.2100 | 16.36 | AV | 54.29 | -37.93 | 64.29 | -47.93 |
| 0.2300 | 14.80 | AV | 53.71 | -38.91 | 63.71 | -48.91 |



Page 4 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

SPURIOUS RADIATED EMISSIONS TEST RESULTS

| | | | |
|-----------------------|--|------------------------|-----------------|
| CLIENT: | Lantronix, Inc. | DATE: | 12/13/04 |
| EUT: | Wireless Embedded Device Server | PROJECT NUMBER: | LANTR-040324-01 |
| MODEL NUMBER: | WiPort | TEST ENGINEER: | RC |
| SERIAL NUMBER: | None | SITE #: | 2 |
| CONFIGURATION: | Tested in wireless mode with the HyperLink Technologies Antenna. | TEMPERATURE: | 12 C |
| | | HUMIDITY: | 50% RH |
| | | TIME: | 10:00 AM |

| | |
|---------------------|---|
| Standard: | FCC Pt. 15.209 |
| Description: | Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Sec. 15.209. |
| Results: | Passes the radiated limits |

| Radiated Limits | |
|------------------------|--------------------------------|
| Frequency (MHz) | Quasi-Peak Limit (dBuV) |
| 30-88 | 40 |
| 88-216 | 43.52 |
| 216-960 | 46.02 |
| 960-1000 | 54 |

NOTE: During preliminary scans, there wasn't any difference which mode, channel, or data rate was used with the EUT; therefore only 802.11b mode at Channel 1 with a data rate of 1 Mbps was used for final testing.

Page 5 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Spurious Radiated Emissions Test Results (Continued)

| RADIATED EMISSIONS - Horizontal Antenna Polarization | | | | | | | | | | | | |
|--|----------------------|---------------------|-------------------|------------------------|--|--|-------------------|------------------|-------------------------------|--------------------------|---------------|------------------|
| Freq. (MHz) | Meter Reading (dBuV) | Antenna Height (cm) | Azimuth (degrees) | Quasi pk or AVG (dBuV) | | | Cable Factor (dB) | Ant. Factor (dB) | 10 Meter Distance Factor (dB) | Corrected Reading (dBuV) | Limits (dBuV) | Diff (dB) +=FAIL |
| 179.97 | 7.88 | 400 | 225 | | | | 2.30 | 16.40 | 10.46 | 37.04 | 43.50 | -6.46 |
| 209.97 | 9.87 | 400 | 180 | | | | 2.48 | 17.16 | 10.46 | 39.97 | 43.50 | -3.53 |
| 250.01 | 12.22 | 400 | 135 | | | | 2.70 | 17.70 | 10.46 | 43.08 | 46.00 | -2.92 |
| 314.56 | 6.96 | 400 | 0 | | | | 3.09 | 14.30 | 10.46 | 27.85 | 46.00 | -18.15 |
| 352.00 | 11.82 | 300 | 270 | | | | 3.31 | 15.19 | 10.46 | 28.96 | 46.00 | -17.04 |
| 374.98 | 3.96 | 300 | 270 | | | | 3.40 | 15.05 | 10.46 | 32.87 | 46.00 | -13.13 |
| 399.96 | 9.54 | 250 | 270 | | | | 3.50 | 15.20 | 10.46 | 38.70 | 46.00 | -7.30 |
| 499.99 | 7.42 | 250 | 270 | | | | 4.00 | 18.80 | 10.46 | 40.68 | 46.00 | -5.32 |

NOTE: The measurements were taken at 10 meters and extrapolated to 3 meters.

Page 6 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Spurious Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization

| Freq. (MHz) | Meter Reading (dBuV) | Antenna Height (cm) | Azimuth (degrees) | Quasi pk or AVG (dBuV) | | Cable Factor (dB) | Ant. Factor (dB) | 10 Meter Distance Factor (dB) | Corrected Reading (dBuV) | Limits (dBuV) | Diff (dB) +=FAIL |
|----------------|----------------------------|---------------------------|----------------------|---------------------------|---|-------------------------|------------------------|-------------------------------------|--------------------------------|------------------|---------------------|
| 52.61 | 14.32 | 100 | 180 | | | 1.13 | 10.40 | 10.46 | 36.31 | 40.00 | -3.69 |
| 61.78 | 21.08 | 100 | 0 | 16.83 | Q | 1.24 | 8.34 | 10.46 | 36.87 | 40.00 | -3.13 |
| 176.00 | 10.58 | 100 | 0 | | | 2.28 | 15.64 | 10.46 | 38.96 | 43.50 | -4.54 |
| 249.99 | 13.11 | 100 | 0 | | | 2.70 | 19.10 | 10.46 | 32.26 | 46.00 | -13.74 |
| 314.56 | 8.68 | 100 | 0 | | | 3.09 | 14.88 | 10.46 | 28.42 | 46.00 | -17.58 |
| 351.99 | 11.04 | 100 | 315 | | | 3.31 | 15.39 | 10.46 | 40.20 | 46.00 | -5.80 |
| 374.99 | 10.77 | 100 | 90 | | | 3.40 | 15.30 | 10.46 | 39.93 | 46.00 | -6.07 |
| 499.98 | 10.30 | 100 | 90 | | | 4.00 | 18.70 | 10.46 | 43.46 | 46.00 | -2.54 |
| 625.01 | 8.85 | 100 | 90 | | | 4.55 | 19.95 | 10.46 | 43.81 | 46.00 | -2.19 |

NOTE: The measurements were taken at 10 meters and extrapolated to 3 meters.

Page 7 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Spurious Radiated Emissions Test Results (Continued)

| | | | |
|-----------------------|--|------------------------|--------------|
| CLIENT: | Lantronix, Inc. | DATE: | 12/13/04 |
| EUT: | Wireless Embedded Device Server | PROJECT NUMBER: | LANTR-041213 |
| MODEL NUMBER: | WiPort | TEST ENGINEER: | RC |
| SERIAL NUMBER: | None | SITE #: | 2 |
| CONFIGURATION: | Tested in wireless mode with the HyperLink Technologies Antenna. | TEMPERATURE: | 15 C |
| | | HUMIDITY: | 77% RH |
| | | TIME: | 10:30 AM |

| | |
|---------------------|--|
| Standard: | FCC CFR 47, Part 15.247(c) |
| Description: | Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc. |
| Results: | Passes (See Data Sheets) |

| Unwanted Spurious Emissions Limits | | | |
|------------------------------------|-----------------------|--|--|
| Frequency (MHz) | Field Strength (uV/m) | Field Strength (dBuV/m) (Emissions in the restricted bands) | Field Strength (dBm/MHz) (Emissions outside the restricted bands) |
| Above 960 | 500 | 54.00 (Average) 74.00 (Peak) | < -20 dBc |

Page 8 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Spurious Radiated Emissions Test Results (Continued)

Fundamental Measurements in 802.11b mode (2400-2483.5 MHz)

Channels 1, 6, & 11

Continuous TX at MAIN Antenna port with HyperLink Technologies Antennas

Aegis Labs, Inc. File #: LANTR-041213-02

RADIATED EMISSIONS - Horizontal Antenna Polarization

| Freq. (MHz) | Meter Reading (dBuV) | Antenna Height (cm) | Azimuth (degrees) | Quasi pk or AVG (dBuV) | Preamp Factor (dB) | Cable Factor (dB) | Ant. Factor (dB) | Corrected Reading (dBuV) | Limits (dBuV) | Diff (dB) +=FAIL |
|-------------|----------------------|---------------------|-------------------|------------------------|--------------------|-------------------|------------------|--------------------------|---------------|------------------|
| 2412.00 | 63.33 | 100 | 135 | | | 2.01 | 32.25 | 97.59 | | |
| 2412.00 | | | | 59.90 | A | 2.01 | 32.25 | 94.16 | | |
| 2437.00 | 63.67 | 125 | 135 | | | 2.02 | 32.35 | 98.04 | | |
| 2437.00 | | | | 60.00 | A | 2.02 | 32.35 | 94.37 | | |
| 2462.00 | 62.17 | 125 | 135 | | | 2.03 | 32.45 | 96.65 | | |
| 2462.00 | | | | 58.86 | A | 2.03 | 32.45 | 93.34 | | |

RADIATED EMISSIONS – Vertical Antenna Polarization

| Freq. (MHz) | Meter Reading (dBuV) | Antenna Height (cm) | Azimuth (degrees) | Quasi pk or AVG (dBuV) | Preamp Factor (dB) | Cable Factor (dB) | Ant. Factor (dB) | Corrected Reading (dBuV) | Limits (dBuV) | Diff (dB) +=FAIL |
|-------------|----------------------|---------------------|-------------------|------------------------|--------------------|-------------------|------------------|--------------------------|---------------|------------------|
| 2412.00 | 70.33 | 100 | 135 | | | 2.01 | 31.97 | 104.31 | | |
| 2412.00 | | | | 67.28 | A | 2.01 | 31.97 | 101.26 | | |
| 2437.00 | 71.83 | 100 | 135 | | | 2.02 | 32.12 | 105.97 | | |
| 2437.00 | | | | 68.36 | A | 2.02 | 32.12 | 102.50 | | |
| 2462.00 | 71.67 | 100 | 135 | | | 2.03 | 32.27 | 105.98 | | |
| 2462.00 | | | | 67.84 | A | 2.03 | 32.27 | 102.15 | | |

Page 9 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Spurious Radiated Emissions Test Results (Continued)

Band Edge Field Strength Measurements in 802.11b mode (2400-2483.5 MHz)

Channels 1, 6, & 11

Continuous TX at MAIN Antenna port with HyperLink Technologies Antennas

Aegis Labs, Inc. File #: LANTR-041213-02

RADIATED EMISSIONS - Horizontal Antenna Polarization

| Freq. (MHz) | Meter Reading (dBuV) | Antenna Height (cm) | Azimuth (degrees) | Quasi pk or AVG (dBuV) | Preamp Factor (dB) | Cable Factor (dB) | Ant. Factor (dB) | Corrected Reading (dBuV) | Limits (dBuV) | Diff (dB) +=FAIL |
|-------------|----------------------|---------------------|-------------------|------------------------|--------------------|-------------------|------------------|--------------------------|---------------|------------------|
| 2390.00 | | | | | | | | 42.76 | 74.00 | -31.24 |
| 2390.00 | | | | | | | | 33.66 | 54.00 | -20.34 |
| 2400.00 | 33.67 | 100 | 135 | | | 2.01 | 32.20 | 67.88 | 77.59 | -9.71 |
| 2483.50 | | | | | | | | 44.32 | 74.00 | -29.68 |
| 2483.50 | | | | | | | | 37.34 | 54.00 | -16.66 |

RADIATED EMISSIONS – Vertical Antenna Polarization

| Freq. (MHz) | Meter Reading (dBuV) | Antenna Height (cm) | Azimuth (degrees) | Quasi pk or AVG (dBuV) | Preamp Factor (dB) | Cable Factor (dB) | Ant. Factor (dB) | Corrected Reading (dBuV) | Limits (dBuV) | Diff (dB) +=FAIL |
|-------------|----------------------|---------------------|-------------------|------------------------|--------------------|-------------------|------------------|--------------------------|---------------|------------------|
| 2390.00 | | | | | | | | 49.48 | 74.00 | -24.52 |
| 2390.00 | | | | | | | | 40.76 | 54.00 | -13.24 |
| 2400.00 | 36.00 | 100 | 135 | | | 2.01 | 31.90 | 69.91 | 84.31 | -14.41 |
| 2483.50 | | | | | | | | 53.65 | 74.00 | -20.35 |
| 2483.50 | | | | | | | | 46.15 | 54.00 | -7.85 |

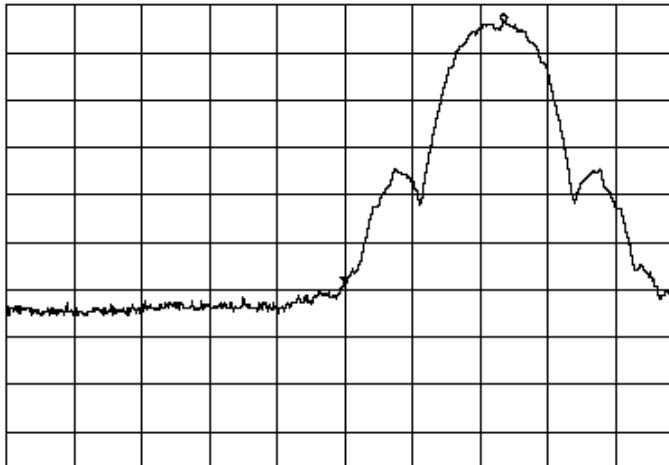
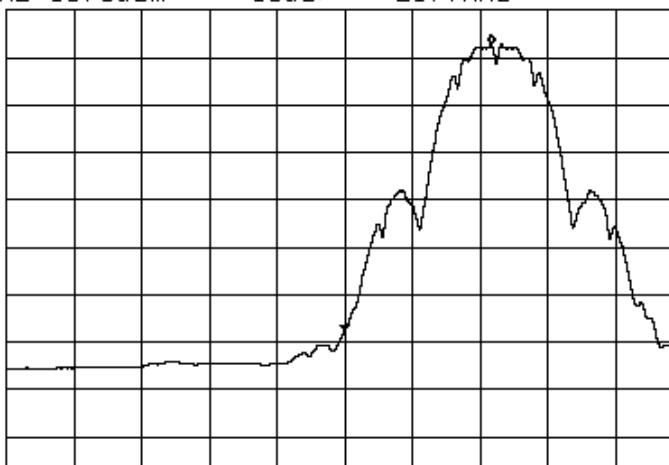
Page 10 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Spurious Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

| Test Date | Data | Test Eng. |
|-----------|---|---|
| 12/13/04 | 2.412 GHz band edge PEAK DELTA (LANTR-040324-10a01) | RC |
| | <p>*ATTEN 20dB ΔMKR 54.83dB RL 10.0dBm 23.5MHz</p>  <p>D</p> <p>CENTER 2.3900GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p> |  |
| Test Date | Data | Test Eng. |
| 12/13/04 | 2.412 GHz band edge AVERAGE DELTA (LANTR-040324-10a02) | RC |
| | <p>*ATTEN 20dB ΔMKR 60.50dB RL 10.0dBm 21.7MHz</p>  <p>D</p> <p>CENTER 2.3900GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 10Hz SWP 25.0sec</p> |  |

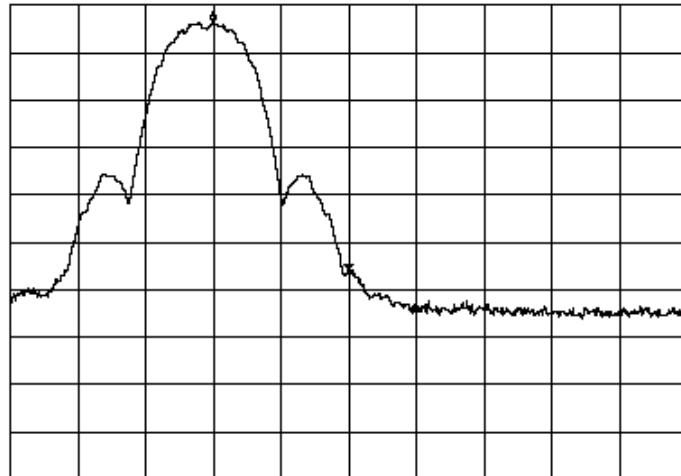
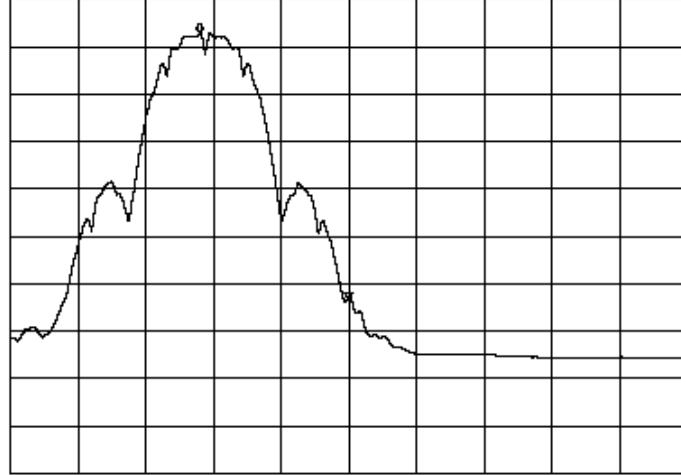
Page 11 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Spurious Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

| Test Date | Data | Test Eng. |
|-----------|---|---|
| 12/13/04 | 2.462 GHz band edge PEAK DELTA (LANTR-040324-10a03) | RC |
| | <p>*ATTEN 20dB RL 10.00 dBm 10dB/</p> <p>△MKR 52.33dB -20.0MHz</p>  <p>CENTER 2.4835GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p> |  |
| Test Date | Data | Test Eng. |
| 12/13/04 | 2.462 GHz band edge AVERAGE DELTA (LANTR-040324-10a04) | RC |
| | <p>*ATTEN 20dB RL 10.00 dBm 10dB/</p> <p>△MKR 56.00dB -22.0MHz</p>  <p>CENTER 2.4835GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 10Hz SWP 25.0sec</p> |  |

Page 12 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Spurious Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11b mode (2400-2483.5 MHz)

Channels 1, 6, & 11

Continuous TX at MAIN Antenna port with HyperLink Technologies Antennas

Aegis Labs, Inc. File #: LANTR-041213-03

RADIATED EMISSIONS - Horizontal Antenna Polarization

| Freq. (MHz) | Meter Reading (dBuV) | Antenna Height (cm) | Azimuth (degrees) | Quasi pk or AVG (dBuV) | Preamp Factor (dB) | Cable Factor (dB) | Ant. Factor (dB) | Corrected Reading (dBuV) | Limits (dBuV) | Diff (dB) +=FAIL |
|----------------|----------------------------|---------------------------|----------------------|---------------------------|--------------------------|-------------------------|------------------------|--------------------------------|------------------|---------------------|
|----------------|----------------------------|---------------------------|----------------------|---------------------------|--------------------------|-------------------------|------------------------|--------------------------------|------------------|---------------------|

EUT in Continuous Transmit Mode on Channel 1 (2.412 GHz)

| | | | | | | | | | | | |
|---------|-------|-----|-----|-------|-------|-------|-------|-------|-------|--------|--------|
| 1000.01 | 52.67 | 100 | 135 | | 50.86 | 1.28 | 27.80 | 30.89 | 74.00 | -43.11 | |
| 1000.01 | | | | 42.00 | A | 50.86 | 1.28 | 27.80 | 20.22 | 54.00 | -33.78 |
| 4824.00 | 51.83 | 100 | 180 | | 50.78 | 2.88 | 34.78 | 38.71 | 74.00 | -35.29 | |
| 4824.00 | | | | 38.00 | A | 50.78 | 2.88 | 34.78 | 24.88 | 54.00 | -29.12 |

EUT in Continuous Transmit Mode on Channel 6 (2.437 GHz)

| | | | | | | | | | | | |
|---------|-------|-----|-----|-------|-------|-------|-------|-------|-------|--------|--------|
| 1000.04 | 55.50 | 100 | 180 | | 50.86 | 1.28 | 27.80 | 33.72 | 74.00 | -40.28 | |
| 1000.04 | | | | 42.83 | A | 50.86 | 1.28 | 27.80 | 21.05 | 54.00 | -32.95 |
| 4873.86 | 50.83 | 100 | 180 | | 50.82 | 2.90 | 34.73 | 37.64 | 74.00 | -36.36 | |
| 4873.86 | | | | 37.83 | A | 50.82 | 2.90 | 34.73 | 24.64 | 54.00 | -29.36 |

EUT in Continuous Transmit Mode on Channel 11 (2.462 GHz)

| | | | | | | | | | | | |
|---------|-------|-----|-----|-------|-------|-------|-------|-------|-------|--------|--------|
| 1000.00 | 55.33 | 100 | 135 | | 50.86 | 1.28 | 27.80 | 33.55 | 74.00 | -40.45 | |
| 1000.00 | | | | 43.00 | A | 50.86 | 1.28 | 27.80 | 21.22 | 54.00 | -32.78 |
| 4924.00 | 50.83 | 100 | 225 | | 50.84 | 2.92 | 34.65 | 37.56 | 74.00 | -36.44 | |
| 4924.00 | | | | 38.17 | A | 50.84 | 2.92 | 34.65 | 24.90 | 54.00 | -29.10 |

Page 13 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Spurious Radiated Emissions Test Results (Continued)

| RADIATED EMISSIONS - Vertical Antenna Polarization | | | | | | | | | | |
|--|----------------------------|---------------------------|----------------------|---------------------------|--------------------------|-------------------------|------------------------|--------------------------------|------------------|---------------------|
| Freq. (MHz) | Meter Reading (dBuV) | Antenna Height (cm) | Azimuth (degrees) | Quasi pk or AVG (dBuV) | Preamp Factor (dB) | Cable Factor (dB) | Ant. Factor (dB) | Corrected Reading (dBuV) | Limits (dBuV) | Diff (dB) +=FAIL |
| EUT in Continuous Transmit Mode on Channel 1 (2.412 GHz) | | | | | | | | | | |
| 1000.10 | 59.33 | 100 | 180 | | 50.86 | 1.28 | 27.30 | 37.05 | 74.00 | -36.95 |
| 1000.10 | | | | 46.33 | A | 50.86 | 1.28 | 27.30 | 24.05 | 54.00 |
| 4823.96 | 51.50 | 100 | 180 | | 50.78 | 2.88 | 34.50 | 38.10 | 74.00 | -35.90 |
| 4823.96 | | | | 40.33 | A | 50.78 | 2.88 | 34.50 | 26.93 | 54.00 |
| EUT in Continuous Transmit Mode on Channel 6 (2.437 GHz) | | | | | | | | | | |
| 1000.17 | 55.67 | 100 | 180 | | 50.86 | 1.28 | 27.30 | 33.39 | 74.00 | -40.61 |
| 1000.17 | | | | 47.50 | A | 50.86 | 1.28 | 27.30 | 25.22 | 54.00 |
| 4874.01 | 52.17 | 100 | 180 | | 50.82 | 2.90 | 34.50 | 38.75 | 74.00 | -35.25 |
| 4874.01 | | | | 40.83 | A | 50.82 | 2.90 | 34.50 | 27.41 | 54.00 |
| EUT in Continuous Transmit Mode on Channel 11 (2.462 GHz) | | | | | | | | | | |
| 1000.30 | 57.50 | 100 | 180 | | 50.86 | 1.28 | 27.30 | 35.22 | 74.00 | -38.78 |
| 1000.30 | | | | 47.33 | A | 50.86 | 1.28 | 27.30 | 25.05 | 54.00 |
| 4924.00 | 50.83 | 100 | 180 | | 50.84 | 2.92 | 34.50 | 37.41 | 74.00 | -36.59 |
| 4924.00 | | | | 40.00 | A | 50.84 | 2.92 | 34.50 | 26.58 | 54.00 |
| | | | | | | | | | | -27.42 |

Page 14 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Spurious Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11b mode (2400-2483.5 MHz)
Channels 1, 6, & 11
Continuous RX at MAIN Antenna port with HyperLink Technologies Antennas
Aegis Labs, Inc. File #: LANTR-041213-03

| RADIATED EMISSIONS - Horizontal Antenna Polarization | | | | | | | | | | | |
|---|----------------------|---------------------|-------------------|------------------------|--------------------|-------------------|------------------|--------------------------|---------------|-------------------|--------|
| Freq. (MHz) | Meter Reading (dBuV) | Antenna Height (cm) | Azimuth (degrees) | Quasi pk or AVG (dBuV) | Preamp Factor (dB) | Cable Factor (dB) | Ant. Factor (dB) | Corrected Reading (dBuV) | Limits (dBuV) | Diff (dB) + =FAIL | |
| EUT in Continuous Receive Mode on Channel 1 (2.412 GHz) | | | | | | | | | | | |
| 1000.30 | 57.50 | 100 | 180 | | 50.86 | 1.28 | 27.30 | 35.22 | 74.00 | -38.78 | |
| 1000.30 | | | | 47.33 | A | 50.86 | 1.28 | 27.30 | 25.05 | 54.00 | -28.95 |
| 4924.00 | 50.83 | 100 | 180 | | 50.84 | 2.92 | 34.50 | 37.41 | 74.00 | -36.59 | |
| 4924.00 | | | | 40.00 | A | 50.84 | 2.92 | 34.50 | 26.58 | 54.00 | -27.42 |
| EUT in Continuous Receive Mode on Channel 6 (2.437 GHz) | | | | | | | | | | | |
| 1000.00 | 55.33 | 100 | 135 | | 50.86 | 1.28 | 27.80 | 33.55 | 80.00 | -46.45 | |
| 1000.00 | | | | 42.67 | A | 50.86 | 1.28 | 27.80 | 20.89 | 60.00 | -39.11 |
| 4873.79 | 51.33 | 100 | 225 | | 50.82 | 2.90 | 34.73 | 38.14 | 80.00 | -41.86 | |
| 4873.79 | | | | 37.33 | A | 50.82 | 2.90 | 34.73 | 24.14 | 60.00 | -35.86 |
| EUT in Continuous Receive Mode on Channel 11 (2.462 GHz) | | | | | | | | | | | |
| 1000.00 | 55.83 | 100 | 135 | | 50.86 | 1.28 | 27.80 | 34.05 | 80.00 | -45.95 | |
| 1000.00 | | | | 43.33 | A | 50.86 | 1.28 | 27.80 | 21.55 | 60.00 | -38.45 |
| 4924.00 | 50.83 | 100 | 180 | | 50.84 | 2.92 | 34.65 | 37.56 | 80.00 | -42.44 | |
| 4924.00 | | | | 37.50 | A | 50.84 | 2.92 | 34.65 | 24.23 | 60.00 | -35.77 |

Page 15 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Spurious Radiated Emissions Test Results (Continued)

| RADIATED EMISSIONS - Vertical Antenna Polarization | | | | | | | | | | | |
|---|----------------------|---------------------|-------------------|------------------------|--------------------|-------------------|------------------|--------------------------|---------------|------------------|--------|
| Freq. (MHz) | Meter Reading (dBuV) | Antenna Height (cm) | Azimuth (degrees) | Quasi pk or AVG (dBuV) | Preamp Factor (dB) | Cable Factor (dB) | Ant. Factor (dB) | Corrected Reading (dBuV) | Limits (dBuV) | Diff (dB) +=FAIL | |
| EUT in Continuous Receive Mode on Channel 1 (2.412 GHz) | | | | | | | | | | | |
| 1000.01 | 59.33 | 100 | 180 | | 50.86 | 1.28 | 27.30 | 37.05 | 80.00 | -42.95 | |
| 1000.01 | | | | 43.83 | A | 50.86 | 1.28 | 27.30 | 21.55 | 60.00 | -38.45 |
| 4824.04 | 52.33 | 150 | 180 | | 50.78 | 2.88 | 34.50 | 38.93 | 80.00 | -41.07 | |
| 4824.04 | | | | 42.33 | A | 50.78 | 2.88 | 34.50 | 28.93 | 60.00 | -31.07 |
| EUT in Continuous Receive Mode on Channel 6 (2.437 GHz) | | | | | | | | | | | |
| 1000.22 | 60.00 | 100 | 225 | | 50.86 | 1.28 | 27.30 | 37.72 | 80.00 | -42.28 | |
| 1000.22 | | | | 48.37 | A | 50.86 | 1.28 | 27.30 | 26.09 | 60.00 | -33.91 |
| 4874.07 | 51.83 | 100 | 180 | | 50.82 | 2.90 | 34.50 | 38.41 | 80.00 | -41.59 | |
| 4874.07 | | | | 40.50 | A | 50.82 | 2.90 | 34.50 | 27.08 | 60.00 | -32.92 |
| EUT in Continuous Receive Mode on Channel 11 (2.462 GHz) | | | | | | | | | | | |
| 1000.16 | 57.33 | 100 | 225 | | 50.86 | 1.28 | 27.30 | 35.05 | 80.00 | -44.95 | |
| 1000.16 | | | | 49.33 | A | 50.86 | 1.28 | 27.30 | 27.05 | 60.00 | -32.95 |
| 4924.00 | 50.00 | 100 | 180 | | 50.84 | 2.92 | 34.50 | 36.58 | 80.00 | -43.42 | |
| 4924.00 | | | | 39.67 | A | 50.84 | 2.92 | 34.50 | 26.25 | 60.00 | -33.75 |

Page 16 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

PEAK TRANSMIT POWER

| | | | |
|-----------------------|--|------------------------|-----------------|
| CLIENT: | Lantronix, Inc. | DATE: | 12/13/04 |
| EUT: | Wireless Embedded Device Server | PROJECT NUMBER: | LANTR-041213-01 |
| MODEL NUMBER: | WiPort | TEST ENGINEER: | RC |
| SERIAL NUMBER: | None | SITE #: | 2 |
| CONFIGURATION: | Tested in wireless mode with the HyperLink Technologies Antenna. | TEMPERATURE: | 12 C |
| | | HUMIDITY: | 89% RH |
| | | TIME: | 8:00 AM |

| | |
|---------------------|--|
| Standard: | FCC CFR 47, Part 15.247(b)(1) |
| Description: | The maximum peak output power of the intentional radiator shall not exceed 1 watt. |
| Results: | See Data Sheet |

Peak Transmit Power Limits

| Frequency (MHz) | Output Power (W) |
|-----------------|------------------|
| 2412-2462 | 1 |

Page 17 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Peak Transmit Power (Continued)

| Mode | Channel | Frequency (MHz) | Rate (Mbps) | Average Power (dBm) | Average Power (mW) | Peak Power (dBm) | Peak Power (mW) |
|----------------|---------|-----------------|-------------|---------------------|--------------------|------------------|-----------------|
| 802.11b | 1 | 2412 | 1 | 13.21 | 20.94 | 15.86 | 38.55 |
| 802.11b | 1 | 2412 | 5.5 | 13.27 | 21.23 | 15.59 | 36.22 |
| 802.11b | 1 | 2412 | 11 | 13.21 | 20.94 | 15.87 | 38.64 |
| 802.11b | 6 | 2437 | 1 | 12.76 | 18.88 | 15.56 | 35.97 |
| 802.11b | 6 | 2437 | 5.5 | 12.92 | 19.59 | 15.52 | 35.65 |
| 802.11b | 6 | 2437 | 11 | 12.87 | 19.36 | 15.56 | 35.97 |
| 802.11b | 11 | 2462 | 1 | 12.83 | 19.19 | 15.53 | 35.73 |
| 802.11b | 11 | 2462 | 5.5 | 12.85 | 19.28 | 15.51 | 35.56 |
| 802.11b | 11 | 2462 | 11 | 12.81 | 19.10 | 15.50 | 35.48 |

NOTE: The output power measurement is conducted.

Page 18 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

6 dB EMISSIONS BANDWIDTH

| | | | |
|-----------------------|--|------------------------|-----------------|
| CLIENT: | Lantronix, Inc. | DATE: | 12/13/04 |
| EUT: | Wireless Embedded Device Server | PROJECT NUMBER: | LANTR-040324-10 |
| MODEL NUMBER: | WiPort | TEST ENGINEER: | RC |
| SERIAL NUMBER: | None | SITE #: | 2 |
| CONFIGURATION: | Tested in wireless mode with the HyperLink Technologies Antenna. | TEMPERATURE: | 22 C |
| | | HUMIDITY: | 50% RH |
| | | TIME: | 2:30 PM |

| | |
|---------------------|---|
| Standard: | FCC CFR 47, Part 15.247(a)(2) |
| Description: | The minimum 6 dB bandwidth shall be at least 500 kHz. |
| Results: | See Data Sheets |

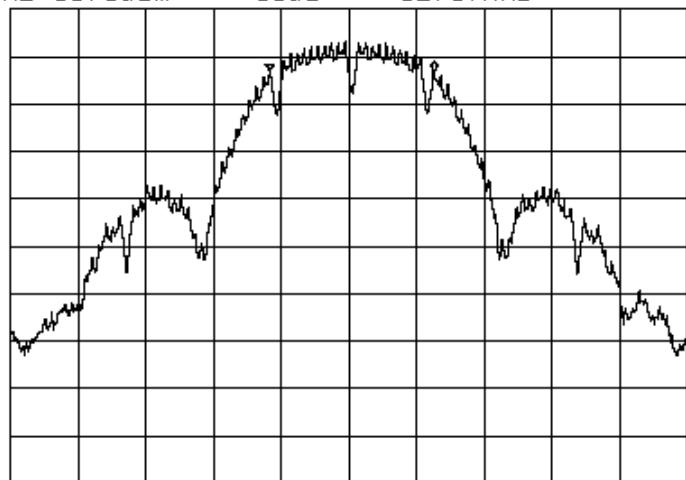
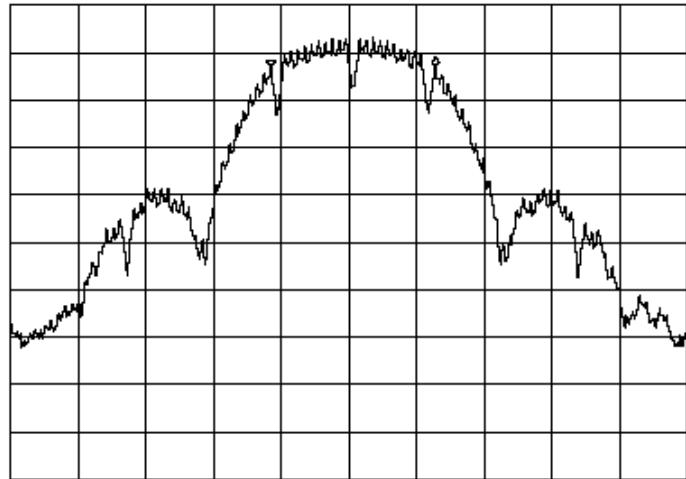
Page 19 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

6 dB Emissions Bandwidth (Continued)

802.11b Mode

| Test Date | Data | Test Eng. |
|-----------|---|-----------|
| 12/13/04 | 2.412 GHz (LANTR-040324-10b1) | RC |
| |  <p>*ATTEN 20dB RL 10.0dBm 10dB/ △MKR 0dB 12.17MHz</p> <p>D</p> <p>CENTER 2.41200GHz SPAN 50.00MHz *RBW 100kHz *VBW 300kHz SWP 50.0ms</p> | |
| Test Date | Data | Test Eng. |
| 12/13/04 | 2.437 GHz (LANTR-040324-10b2) | RC |
| |  <p>*ATTEN 20dB RL 10.0dBm 10dB/ △MKR 0dB 12.17MHz</p> <p>D</p> <p>CENTER 2.46200GHz SPAN 50.00MHz *RBW 100kHz *VBW 300kHz SWP 50.0ms</p> | |

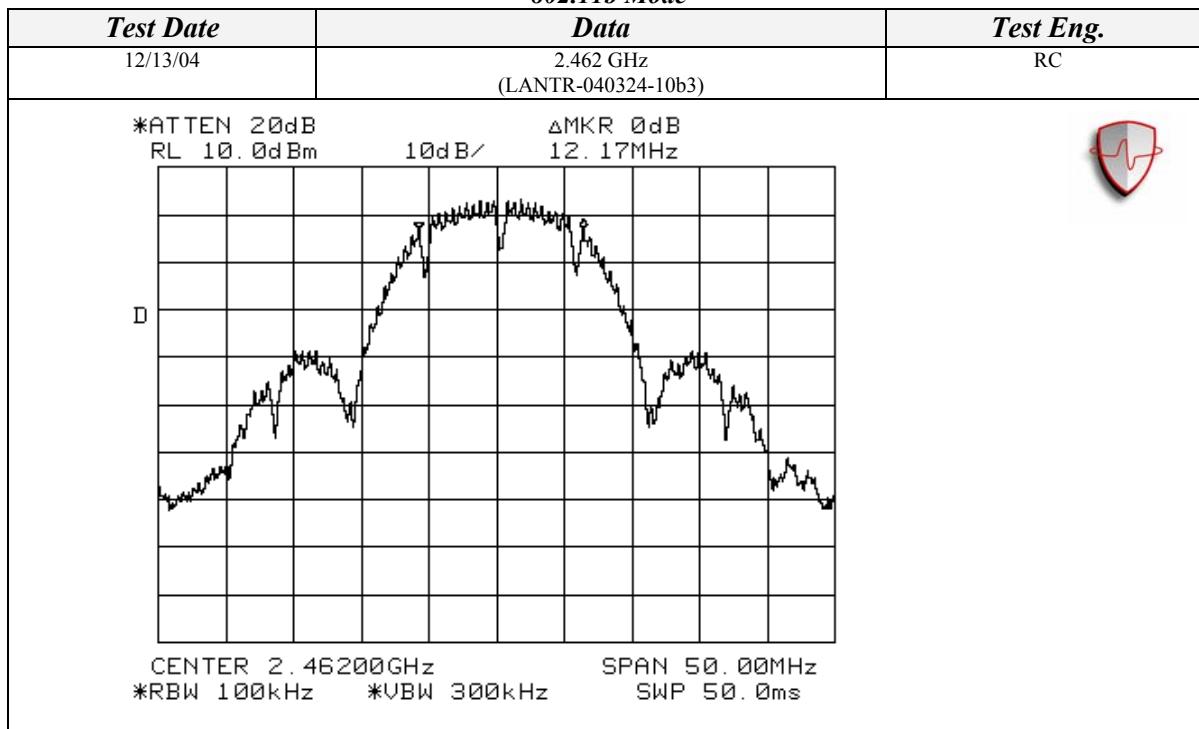
Page 20 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



6 dB Emissions Bandwidth (Continued)

AEGIS LABS INC.

802.11b Mode



Page 21 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

PEAK POWER SPECTRAL DENSITY

| | | | |
|-----------------------|--|------------------------|--------------|
| CLIENT: | Lantronix, Inc. | DATE: | 12/13/04 |
| EUT: | Wireless Embedded Device Server | PROJECT NUMBER: | LANTR-040324 |
| MODEL NUMBER: | WiPort | TEST ENGINEER: | RC |
| SERIAL NUMBER: | None | SITE #: | 2 |
| CONFIGURATION: | Tested in wireless mode with the HyperLink Technologies Antenna. | TEMPERATURE: | 22 C |
| | | HUMIDITY: | 50% RH |
| | | TIME: | 2:30 PM |

| | |
|---------------------|---|
| Standard: | FCC CFR 47, Part 15.247(d) |
| Description: | The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. |
| Results: | See Data Sheets |

| Peak Power Spectral Density Limits | |
|------------------------------------|-------------|
| Frequency (MHz) | Limit (dBm) |
| 2412-2462 | 8 |

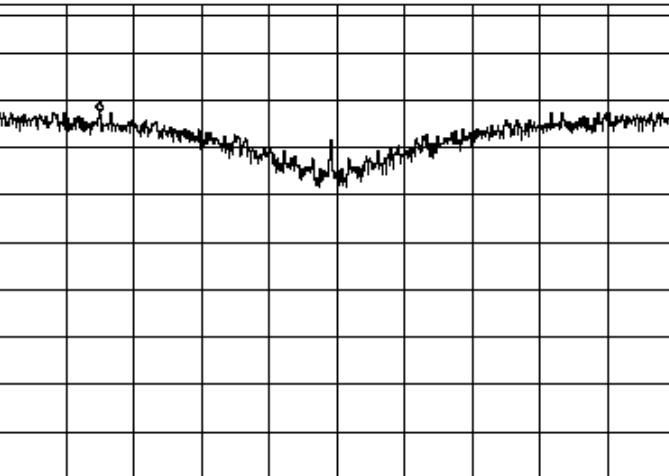
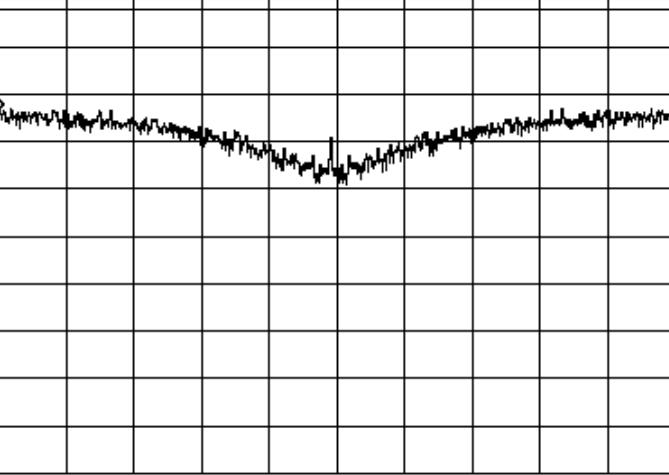
Page 22 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Peak Power Spectral Density (Continued)

802.11b Mode

| Test Date | Data | Test Eng. |
|-----------|---|-----------|
| 12/13/04 | 2.412 GHz (LANTR-040324-10d1) | RC |
| | *ATTEN 20dB RL 10.0dBm 10dB/ MKR -12.50dBm 2.411475GHz | |
| |  | |
| | CENTER 2.412000GHz SPAN 1.500MHz *RBW 3.0kHz *VBW 3.0kHz *SWP 500sec | |
| Test Date | Data | Test Eng. |
| 12/13/04 | 2.437 GHz (LANTR-040324-10d2) | RC |
| | *ATTEN 20dB RL 10.0dBm 10dB/ MKR -13.17dBm 2.436253GHz | |
| |  | |
| | CENTER 2.437000GHz SPAN 1.500MHz *RBW 3.0kHz *VBW 3.0kHz *SWP 500sec | |

Page 23 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



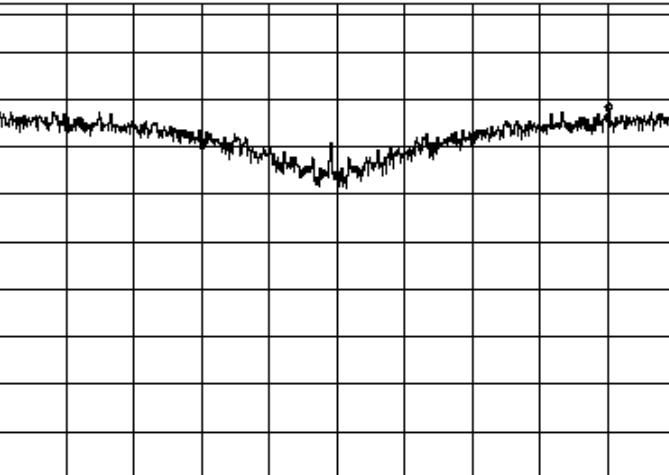
Peak Power Spectral Density (Continued)

AEGIS LABS INC.

802.11b Mode

| Test Date | Data | Test Eng. |
|---------------------------|---------------------------------------|-----------|
| 12/13/04 | 2.462 GHz (LANTR-040324-10d3) | RC |
| *ATTEN 20dB RL 10.0dBm | MKR -12.67dBm 10dB/ 2.462603GHz | |

D



CENTER 2.462000GHz SPAN 1.500MHz
*RBW 3.0kHz *VBW 3.0kHz *SWP 500sec

Page 24 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

CONDUCTED OUT OF BAND EMISSIONS

| | | | |
|-----------------------|--|------------------------|--------------|
| CLIENT: | Lantronix, Inc. | DATE: | 12/13/04 |
| EUT: | Wireless Embedded Device Server | PROJECT NUMBER: | LANTR-040324 |
| MODEL NUMBER: | WiPort | TEST ENGINEER: | RC |
| SERIAL NUMBER: | None | SITE #: | 2 |
| CONFIGURATION: | Tested in wireless mode with the HyperLink Technologies Antenna. | TEMPERATURE: | 22 C |
| | | HUMIDITY: | 50% RH |
| | | TIME: | 2:30 PM |

| | |
|---------------------|--|
| Standard: | FCC CFR 47, Part 15.247(c) |
| Description: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. |

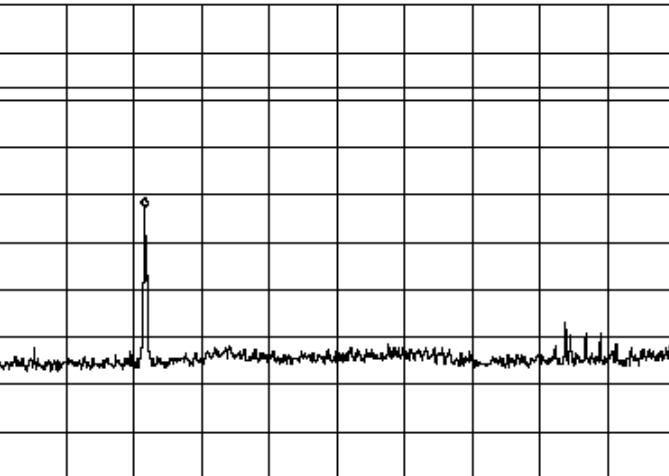
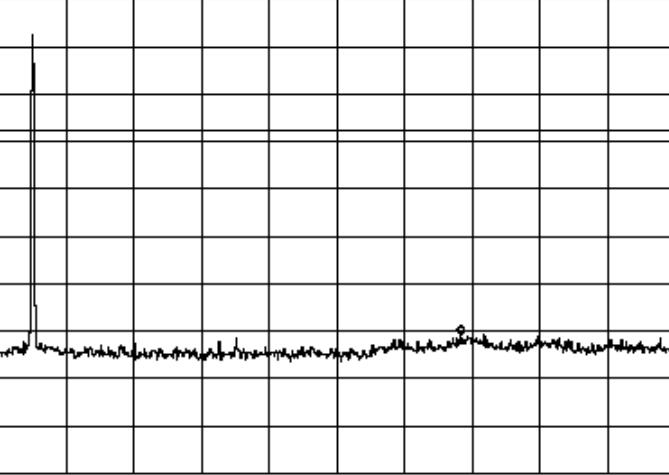
Page 25 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Conducted Out Of Band Emissions (Continued)

802.11b Mode

| Test Date | Data | Test Eng. |
|-----------|---|---|
| 12/13/04 | 2.412 GHz (LANTR-040324-10e01) | RC |
| | <p>*ATTEN 10dB RL 0dBm 10dB/</p> <p>MKR -42.67dBm 457MHz</p>  <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 500ms</p> |  |
| Test Date | Data | Test Eng. |
| 12/13/04 | 2.412 GHz (LANTR-040324-10e02) | RC |
| | <p>*ATTEN 20dB RL 10.0dBm 10dB/</p> <p>MKR -60.83dBm 7.467GHz</p>  <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 2.00sec</p> |  |

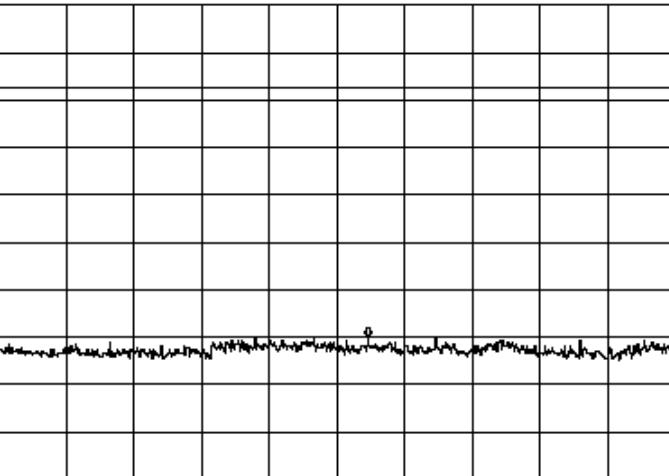
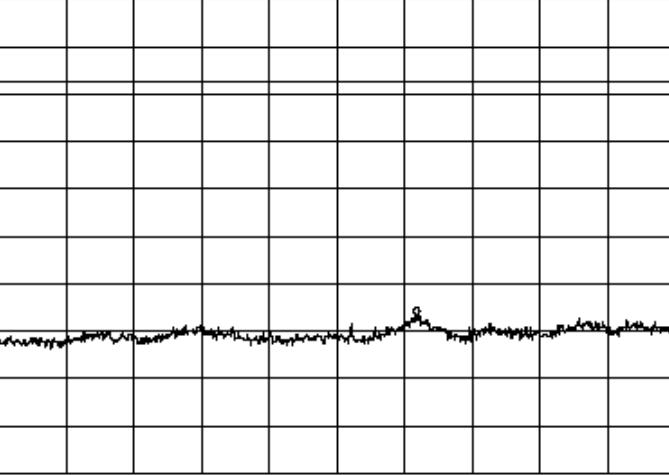
Page 26 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Conducted Out Of Band Emissions (Continued)

802.11b Mode

| Test Date | Data | Test Eng. |
|-----------|--|---|
| 12/13/04 | 2.412 GHz (LANTR-040324-10e03) | RC |
| | <p>*ATTEN 10dB RL 0dBm 10dB/</p> <p>MKR -70. 00dBm 15. 47GHz</p>  <p>START 10. 00GHz STOP 20. 00GHz *RBW 100kHz *VBW 300kHz SWP 2.50sec</p> |  |
| Test Date | Data | Test Eng. |
| 12/13/04 | 2.412 GHz (LANTR-040324-10e04) | RC |
| | <p>*ATTEN 10dB RL 0dBm 10dB/</p> <p>MKR -66. 83dBm 24. 019GHz</p>  <p>START 20. 00GHz STOP 26. 50GHz *RBW 100kHz *VBW 300kHz SWP 1.70sec</p> |  |

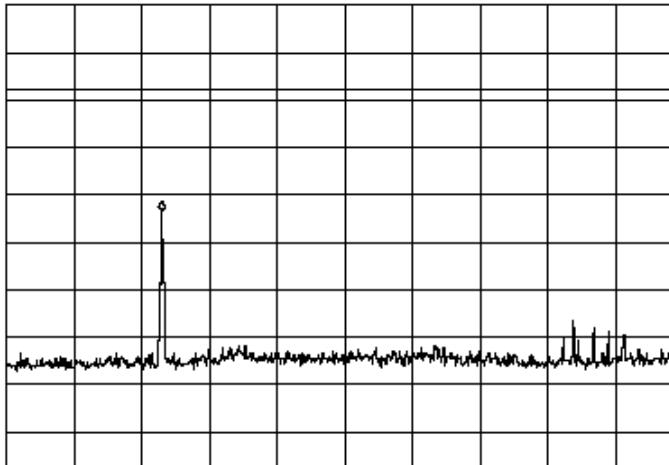
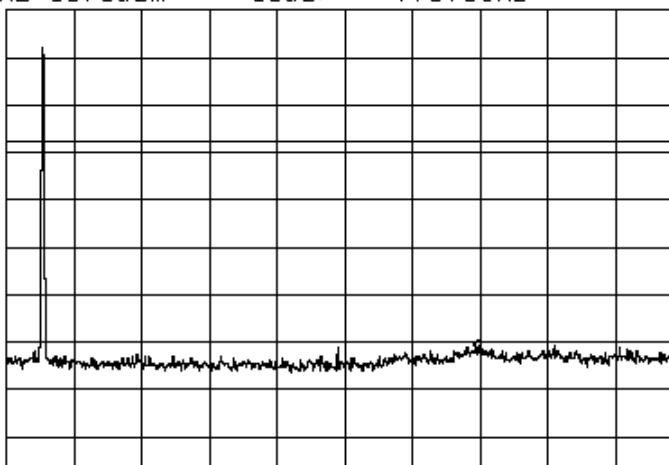
Page 27 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Conducted Out Of Band Emissions (Continued)

802.11b Mode

| Test Date | Data | Test Eng. |
|---|-----------------------------------|-----------|
| 12/13/04 | 2.437 GHz (LANTR-040324-10e05) | RC |
| <p>*ATTEN 10dB RL 0dBm 10dB/</p> <p>MKR -43.50dBm 483MHz</p>  | | |
| <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 500ms</p> | | |
| Test Date | Data | Test Eng. |
| 12/13/04 | 2.437 GHz (LANTR-040324-10e06) | RC |
| <p>*ATTEN 20dB RL 10.00dBm 10dB/</p> <p>MKR -61.50dBm 7.573GHz</p>  | | |
| <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 2.00sec</p> | | |

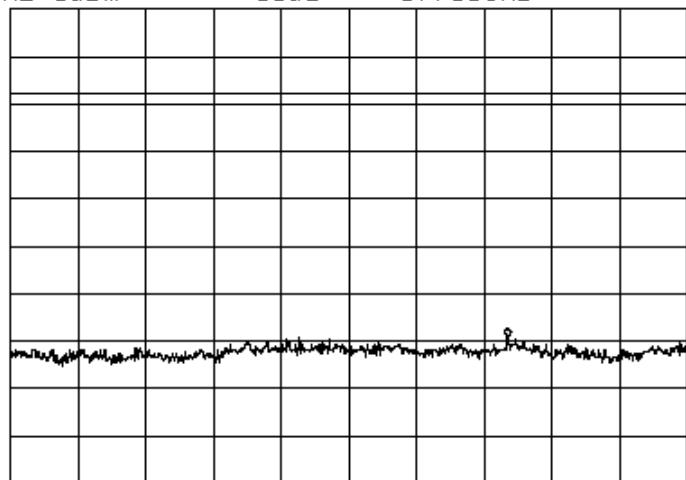
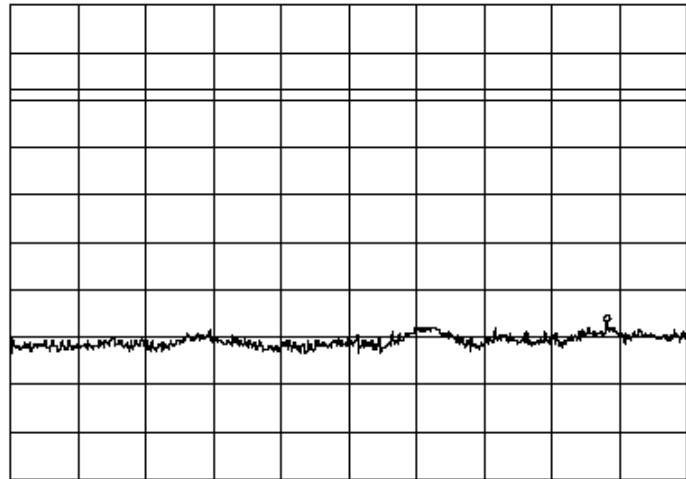
Page 28 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Conducted Out Of Band Emissions (Continued)

802.11b Mode

| Test Date | Data | Test Eng. |
|-----------|--|-----------|
| 12/13/04 | 2.437 GHz (LANTR-040324-10e07) | RC |
| | <p>*ATTEN 10dB RL 0dBm 10dB/</p> <p>MKR -69. 17dBm 17. 35GHz</p>  | |
| | <p>START 10. 00GHz STOP 20. 00GHz *RBW 100kHz *VBW 300kHz SWP 2.50sec</p> | |
| Test Date | Data | Test Eng. |
| 12/13/04 | 2.437 GHz (LANTR-040324-10e08) | RC |
| | <p>*ATTEN 10dB RL 0dBm 10dB/</p> <p>MKR -67. 17dBm 25. 731GHz</p>  | |
| | <p>START 20. 00GHz STOP 26. 50GHz *RBW 100kHz *VBW 300kHz SWP 1.70sec</p> | |

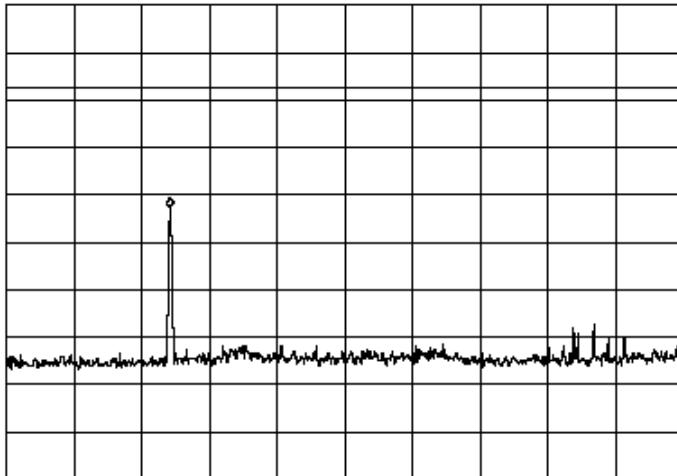
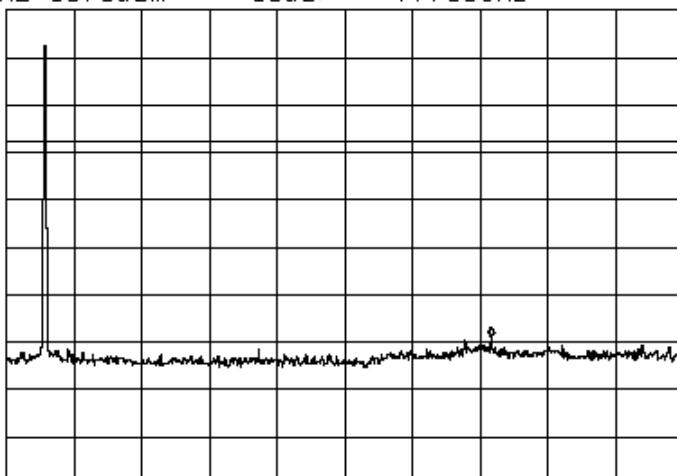
Page 29 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT



AEGIS LABS INC.

Conducted Out Of Band Emissions (Continued)

802.11b Mode

| Test Date | Data | Test Eng. |
|-----------|---|---|
| 12/13/04 | 2.462 GHz (LANTR-040324-10e09) | RC |
| | <p>*ATTEN 10dB RL 0dBm 10dB/ MKR -42.67dBm 506MHz</p>  <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 500ms</p> |  |
| Test Date | Data | Test Eng. |
| 12/13/04 | 2.462 GHz (LANTR-040324-10e10) | RC |
| | <p>*ATTEN 20dB RL 10.00dBm 10dB/ MKR -59.00dBm 7.733GHz</p>  <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 2.00sec</p> |  |

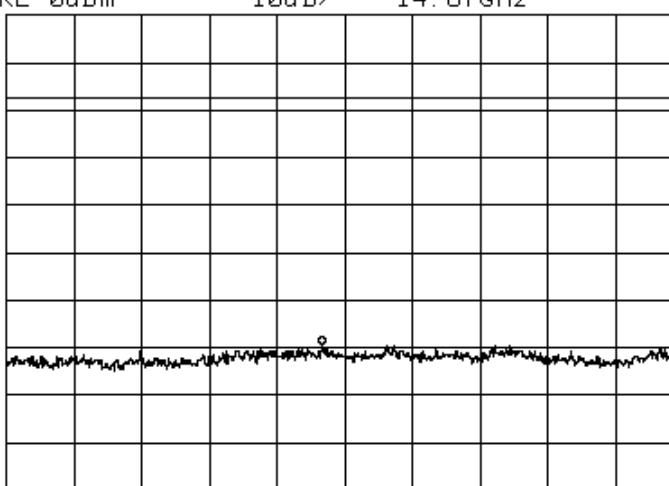
Page 30 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT

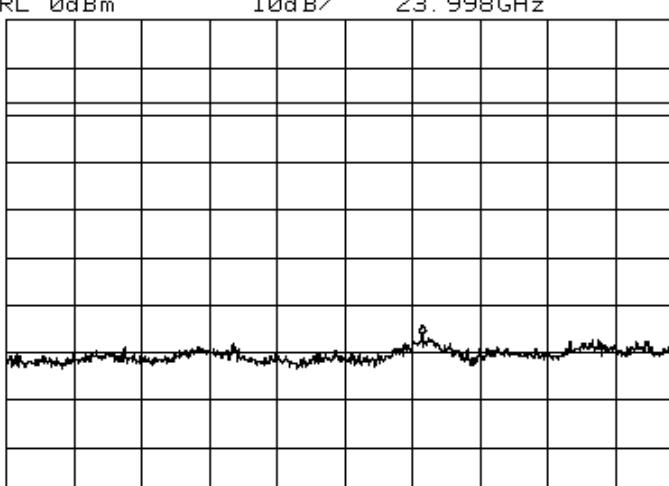


Conducted Out Of Band Emissions (Continued)

AEGIS LABS INC.

802.11b Mode

| Test Date | Data | Test Eng. |
|---|-----------------------------------|-----------|
| 12/13/04 | 2.462 GHz (LANTR-040324-10e11) | RC |
| <p>*ATTEN 10dB RL 0dBm 10dB/ 14.67GHz</p> <p>MKR -69.50dBm</p>  <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 2.50sec</p> | | |

| Test Date | Data | Test Eng. |
|--|-----------------------------------|-----------|
| 12/13/04 | 2.462 GHz (LANTR-040324-10e12) | RC |
| <p>*ATTEN 10dB RL 0dBm 10dB/ 23.998GHz</p> <p>MKR -66.33dBm</p>  <p>START 20.00GHz STOP 26.50GHz *RBW 100kHz *VBW 300kHz SWP 1.70sec</p> | | |

Page 31 of 31 (Appendix A)
Report Number: LANTR-041213F
FCC ID: R68WIPORT