

APPLICATION FOR CERTIFICATION
On Behalf of
Shuoying Industrial (Shenzhen) Co., Ltd

2.4GHz Wireless Baby Monitor

Model Number: SY-172

Prepared for : Shuoying Industrial (Shenzhen) Co., Ltd
Shuoying Road, Hebei Industry Area, Dalang, Longhua,
Town, Baoan, Shenzhen, China

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F5303
Date of Test : Sep.08~Oct.09, 2005
Date of Report : Oct.17, 2005

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. GENERAL INFORMATION	1-4
1.1. Description of Device (EUT)	1-4
1.2. Test Facility	1-5
1.3. Measurement Uncertainty	1-5
2. POWER LINE CONDUCTED EMISSION TEST	2-1
2.1. Test Equipment.....	2-1
2.2. Block Diagram of Test Setup	2-1
2.3. Power Line Conducted Emission Limit	2-1
2.4. EUT Configuration on Test.....	2-2
2.5. Operating Condition of EUT	2-2
2.6. Test Procedure.....	2-2
2.7. Power Line Conducted Emission Test Results	2-3
3. RADIATED EMISSION TEST.....	3-4
3.1. Test Equipment.....	3-4
3.2. Block Diagram of Test Setup	3-4
3.3. Radiated Emission Limit	3-5
3.4. EUT Configuration on Test.....	3-6
3.5. Operating Condition of EUT	3-6
3.6. Test Procedure.....	3-6
3.7. Radiated Emission Test Results	3-7
4. BANDWIDTH TEST.....	4-1
4.1. Test Equipment.....	4-1
4.2. Test Standard.....	4-1
4.3. Bandwidth Limit.....	4-1
4.4. Test Procedure.....	4-1
5. PHOTOGRAPH.....	5-1
5.1. Photos of Power Line Conducted Emission Test	5-1
5.2. Photos of Radiated Emission Test (In Anechoic Chamber).....	5-2

APPENDIX I
APPENDIX II

(3 pages)
(19 pages)

TEST REPORT DECLARATION

Applicant : Shuoying Industrial (Shenzhen) Co., Ltd
Manufacturer : Shuoying Industrial (Shenzhen) Co., Ltd
EUT Description : 2.4GHz Wireless Baby Monitor
(A) MODEL NO. : SY-172
(B) SERIAL NO. : F2005101701
(C) POWER SUPPLY : DC 9V Adaptor AC Input 120V/60Hz

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Apr. 2005.

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.


This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.
This report must not be used by the applicant to claim product endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Date of Test : Sep.08~Oct.09, 2005

Prepared by :
Annie Wu
Annie Wu / Assistant

Reviewer :
Lake Wang
Lake Wang / Supervisor

Approved & Authorized Signer :
Ken Lu / Assistant Manager

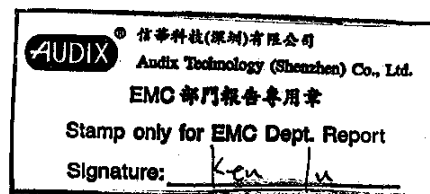

Name of the Representative of the Responsible Party : _____

Signature : _____

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	2.4GHz Wireless Baby Monitor This report is about transmitter FCC ID and the Receiver FCC DOC report please refer to AUDIX Number ACS-F05303
Model Number	:	SY-172
Applicant	:	Shuoying Industrial (Shenzhen) Co., Ltd Shuoying Road, Hebei Industry Area, Dalang, Longhua, Town, Baoan, Shezhen, China
Manufacturer	:	Shuoying Industrial (Shenzhen) Co., Ltd Shuoying Road, Hebei Industry Area, Dalang, Longhua, Town, Baoan, Shezhen, China
Date of Test	:	Sep.08~Oct.09, 2005

1.2. Test Facility

Site Description

- 3m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 90454
Aug. 15, 2003
- 3m & 10m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 794232
Mar. 15, 2004
- EMC Lab. : Certificated by DATech, German
Registration Number: DAT-P-091/99-01
Feb. 02, 2004
- Certificated by NVLAP, USA
NVLAP Code: 200372-0
Mar. 31, 2004
- Certificated by Nemko, Norway
Aut. No.: ELA135
April. 22, 2004
- Certificated by Industry Canada
Registration Number: IC 5183
Jul. 28, 2004
- Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
- Site Location : No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

1.3. Measurement Uncertainty

No.	Item	Uncertainty	Remark
1.	Uncertainty for Conducted Emission Test	1.22dB	
2.	Uncertainty for Radiated Emission Test	3.14dB	3m Chamber
3.	Uncertainty for Radiated Emission Test	3.18dB	10m Chamber
4.	Uncertainty for Power Clamp Test	1.38dB	


2. POWER LINE CONDUCTED EMISSION TEST

2.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	May 16, 05	1 Year
2.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	May 16, 05	1 Year
3.	L.I.S.N.#2	Kyoritsu	KNW-407	8-1636-1	May 16, 05	1 Year
4.	L.I.S.N.#3	EMCO	3825/2	9006-1660	May 16, 05	1 Year
5.	Terminator	Hubersuhner	50Ω	No. 1	May 16, 05	1 Year
6.	Terminator	Hubersuhner	50Ω	No. 2	May 16, 05	1 Year
7.	RF Cable	MIYAZAKI	5D-2W	LISN Cable 1#	Aug. 17, 05	1/2 Year
8.	Passive Probe	Rohde & Schwarz	ESH2-Z3	299.7810.52	May 16, 05	1 Year
9.	Coaxial Switch	Anritsu	MP59B	M55367	Aug.17 05	1/2 Year
10.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100340	Aug. 17, 05	1/2 Year
11.	PC	N/A	586ATXS	N/A	N/A	N/A
12.	Printer	HP	Laserjet2100	SGGJ092351	N/A	N/A

2.2. Block Diagram of Test Setup

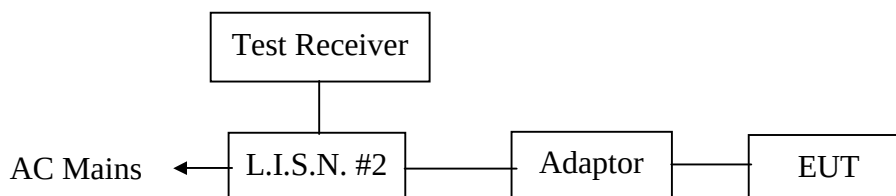

(EUT: 2.4GHz Wireless Baby Monitor)

2.3. Power Line Conducted Emission Limit (Test Standard: FCC Part 15.107)

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150KHz ~ 500KHz	66 ~ 56*	56 ~ 46*
500KHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

2.4. EUT Configuration on Test

The following equipments are installed on RF LINE VOLTAGE Test to meet the Commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

2.4.1. 2.4GHz Wireless Baby Monitor (EUT)

Model Number	:	SY-172
Serial Number	:	F2005101701
Manufacturer	:	Shuoying Industrial (Shenzhen) Co., Ltd

2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulator as shown on Section 2.2.

2.5.2. Turn on the power of all equipment.

2.5.3. Let the EUT work in test mode (TX) and measure it.

2.6. Test Procedure

The EUT is put on the table which is 0.8m above the ground and away from other metallic surface at least 0.4m. The EUT is connected to the AC/DC Adapter. The AC/DC Adapter power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the testing equipment; and the peripheral equipment powers form other L.I.S.N.. Please refer to the block diagram of the test setup and photographs. Both sides of AC line(Line & Neutral) are checked for maximum conducted interference. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables must be changed according to ANSI / IEEE Standard 213-2001 on Conducted Emission Test.

The bandwidth of the field strength meter (R & S Test Receiver ESHS20) is set at 10KHz.

The frequency range from 150KHz to 30MHz is checked.

The details of test modes are as the followings, and the test data please see APPENDIX I.

2.7. Power Line Conducted Emission Test Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.

All emissions not reported below are too low against the prescribed limits.

Date of Test	: Sep.08,2005	Temperature	: 23°C
EUT	: 2.4GHz Wireless Baby Monitor	Humidity	: 54%
Model No.	: SY-172	Test Mode	: TX
Test Engineer	: Sam		

Frequency (MHz)	Reading (dBμV)				Limit (dBμV)	
	VA		VB			
	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.151	38.19	*	33.75	*	65.96	55.96

Remark: 1) If the data table appeared symbol of “N/A” means the value was too low to be measured.

2) If the data table appeared symbol of “*” means the Q.P. value is under the limit for average, so, the average value had been omitted.

Reviewer :

Lake Wang

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipments are used during the radiated emission Test :

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 16, 05	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 16, 05	1 Year
3.	Amplifier	HP	8447D	2944A07794	Sep.14, 05	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 12, 05	1 Year
5.	PC	N/A	586ATX3	N/A	N/A	N/A
6.	Printer	HP	Laserjet6P	SGCF019673	N/A	N/A
7.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jul. 29, 05	1/2 Year
8.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jul. 29, 05	1/2 Year
9.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jul. 29, 05	1/2 Year
10.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jul. 29, 05	1/2 Year
11.	Coaxial Switch	Anritsu	MP59B	M73989	Jul. 29, 05	1/2 Year

3.2. Block Diagram of Test Setup


3.2.1. Block Diagram of connection between EUT and simulators



(EUT: 2.4GHz Wireless Baby Monitor)

3.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

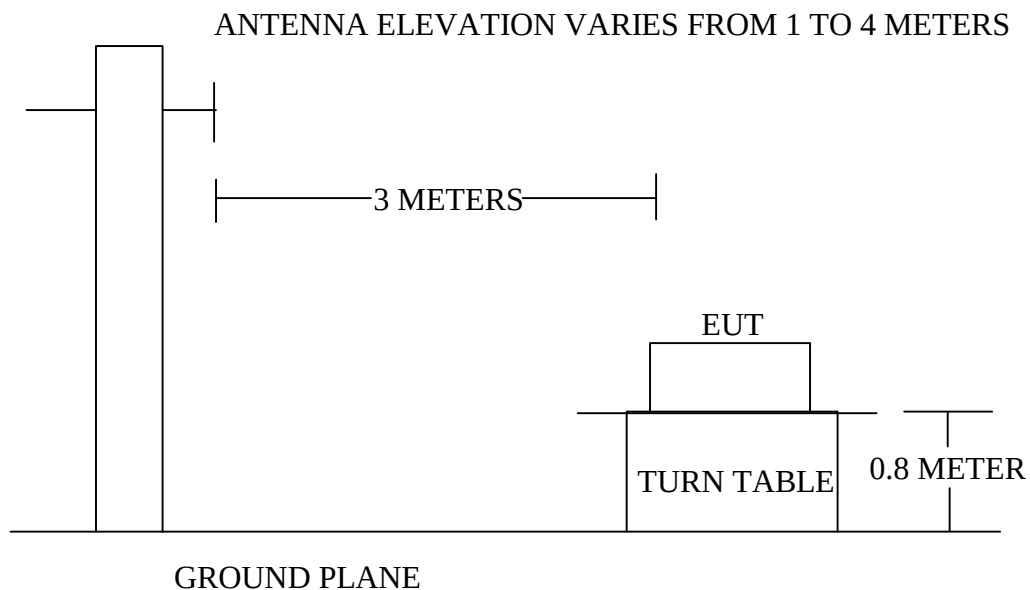

3.3. Radiated Emission Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Local Oscillator: 114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1. 2.4GHz Wireless Baby Monitor (EUT)

Model Number	:	SY-172
Serial Number	:	F2005101701
Manufacturer	:	Shuoying Industrial (Shenzhen) Co., Ltd

3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2..

3.5.2. Let the EUT work in test modes (TX Channel 1/TX Channel 2/TX Channel 3/TX Channel 4) and test it.

3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2001 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120KHz.

The frequency range from 30MHz to 24GHz are checked.

The test modes (TX Channel 1/TX Channel 2/TX Channel 3/TX Channel 4) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

3.7. Radiated Emission Test Results

PASS.

The frequency range from 30MHz to 1000MHz is investigated.
Please see the following pages.

Date of Test :	Sep.08,2005	Temperature :	23°C
EUT :	2.4GHz Wireless Baby Monitor	Humidity :	54%
Model No. :	SY-172	Test Mode :	TX
Test Engineer:	Mario		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m
107.600	11.24	2.26	4.96	18.47	-25.03	43.50
150.280	11.63	2.72	4.58	18.93	-24.57	43.50
446.130	16.66	4.96	1.76	23.37	-22.63	46.00
552.830	18.99	5.51	1.75	26.25	-19.75	46.00
697.360	20.38	6.24	0.03	26.65	-19.35	46.00
882.630	22.05	7.37	2.79	32.21	13.79	46.00

- Remark: 1. All readings are Quasi-Peak values.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
 3. The worst emission was detected at 882.630MHz with corrected signal level of 32.21dBμV/m (Limit is 46.00dBμV/m) when the antenna was at horizontal polarization and at 1.35m high and the turn table was at 205 ° .
 4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer :


Lake Wang

Date of Test :	Sep.08,2005	Temperature :	23°C
EUT :	2.4GHz Wireless Baby Monitor	Humidity :	54%
Model No. :	SY-172	Test Mode :	TX
Test Engineer:	Mario		

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits
MHz	Factor	Loss	Vertical	Vertical	Limits	
	dB/m	dB	dBμV	dBμV/m	dB	dBμV/m
45.520	8.27	1.47	10.36	20.09	-19.91	40.00
400.540	15.85	4.69	2.68	23.22	-22.78	46.00
461.650	16.60	5.10	4.69	26.39	-19.61	46.00
557.680	19.74	5.65	1.79	27.18	-18.82	46.00
732.280	21.21	6.58	2.88	30.67	-15.33	46.00
829.280	22.05	6.96	3.18	32.19	-13.81	46.00

- Remark: 1. All readings are Quasi-Peak values.
2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
3. The worst emission was detected at 829.280MHz with corrected signal level of 32.19dBμV/m (Limit is 46.00dBμV/m) when the antenna was at vertical polarization and at 1.0m high and the turn table was at 124 ° .
4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer :

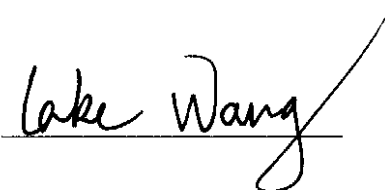


Date of Test :	Oct.09,2005	Temperature :	23℃
EUT :	2.4GHz Wireless Baby Monitor	Humidity :	54%
Model No. :	SY-172	Test Mode :	TX Channel 1
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Probe Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dBμV/ m	Limits dBμV/m	Remark
2414.200	35.18	29.03	6.20	94.37	94.42	-19.58	114.00	Peak
4828.400	34.49	33.96	9.55	61.49	70.51	-3.49	74.00	Peak
7242.600	34.44	37.39	10.78	52.83	66.56	-7.44	74.00	Peak
9656.800	35.92	38.12	11.54	49.34	63.08	-10.92	74.00	Peak
12071.000	36.37	39.55	11.81	45.64	60.63	-13.37	74.00	Peak
2414.200	35.18	29.03	6.20	81.55	81.60	-12.40	94.00	Average
4828.200	34.49	33.96	9.55	39.98	49.00	-5.00	54.00	Average
7242.600	34.44	37.39	10.78	35.27	49.00	-5.0	54.00	Average
9656.800	35.92	38.12	11.54	34.26	48.00	-6.00	54.00	Average
12071.000	36.37	39.55	11.81	32.01	47.00	-7.00	54.00	Average

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss-Preamp Factor
2.The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer :

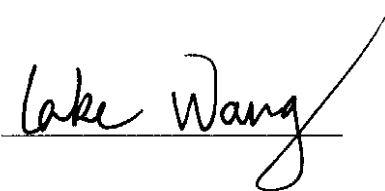


Date of Test :	Oct.09,2005	Temperature :	23°C
EUT :	2.4GHz Wireless Baby Monitor	Humidity :	54%
Model No. :	SY-172	Test Mode :	TX Channel 1
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Probe Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dBμV/m	Limits dBμV/m	Remark
2414.200	35.18	29.03	6.20	95.37	95.42	-18.58	114.00	Peak
4828.400	34.49	33.96	9.55	60.49	69.51	-4.49	74.00	Peak
7242.600	34.44	37.39	10.78	53.38	67.56	-6.44	74.00	Peak
9656.800	35.92	38.12	11.54	49.34	63.08	-10.92	74.00	Peak
12071.000	36.37	39.55	11.81	42.64	57.63	-16.37	74.00	Peak
2414.200	35.18	29.03	6.20	82.55	82.60	-11.40	94.00	Average
4828.400	34.49	33.96	9.55	37.98	47.00	-7.00	54.00	Average
7242.600	34.44	37.39	10.78	33.27	47.00	-7.00	54.00	Average
9656.800	35.92	38.12	11.54	33.26	47.00	-7.00	54.00	Average
12071.000	36.37	39.55	11.81	31.01	47.00	-8.00	54.00	Average

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss-Preamp Factor
2.The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer :

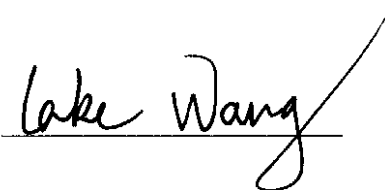


Date of Test :	Oct.09,2005	Temperature :	23°C
EUT :	2.4GHz Wireless Baby Monitor	Humidity :	54%
Model No. :	SY-172	Test Mode :	TX Channel 2
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Probe Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dBμV/ m	Limits dBμV/m	Remark
2432.200	35.17	29.07	6.22	95.31	95.43	-18.57	114.00	Peak
4864.400	34.48	34.04	9.67	59.79	69.02	-4.98	74.00	Peak
7296.600	34.46	37.50	10.81	52.89	66.74	-7.26	74.00	Peak
9728.800	36.00	38.04	11.54	52.62	66.20	-7.80	74.00	Peak
12161.000	36.35	39.50	11.75	49.95	64.85	-9.15	74.00	Peak
2432.200	35.17	29.07	6.22	83.48	83.60	-10.40	94.00	Average
4864.400	34.48	34.04	9.67	38.27	47.50	-6.50	54.00	Average
7296.600	34.46	37.50	10.81	33.35	47.20	-6.80	54.00	Average
9728.800	36.00	38.04	11.54	33.62	47.20	-6.80	54.00	Average
12161.000	36.35	39.50	11.75	31.30	46.20	-7.80	54.00	Average

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss-Preamplifier Factor
2.The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer :

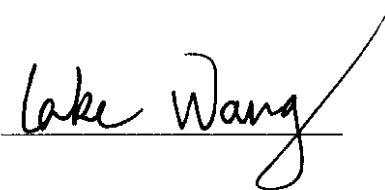


Date of Test :	Oct.09,2005	Temperature :	23°C
EUT :	2.4GHz Wireless Baby Monitor	Humidity :	54%
Model No. :	SY-172	Test Mode :	TX Channel 2
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Probe Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dBμV/m	Limits dBμV/m	Remark
2432.200	35.17	29.07	6.22	95.31	95.43	-18.57	114.00	Peak
4864.400	34.48	34.04	9.67	59.79	69.02	-4.98	74.00	Peak
7296.600	34.46	37.50	10.81	54.89	68.74	-5.26	74.00	Peak
9728.800	36.00	38.04	11.54	50.62	64.20	-9.80	74.00	Peak
12161.000	36.35	39.50	11.75	44.95	59.85	-14.15	74.00	Peak
2432.200	35.17	29.07	6.22	83.48	83.60	-10.40	94.00	Average
4864.400	34.48	34.04	9.67	37.27	46.50	-7.50	54.00	Average
7296.600	34.46	37.50	10.81	33.35	47.20	-6.80	54.00	Average
9728.800	36.00	38.04	11.54	33.62	47.20	-6.80	54.00	Average
12161.000	36.35	39.50	11.75	31.30	46.20	-7.80	54.00	Average

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss-Preamp Factor
2.The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer :

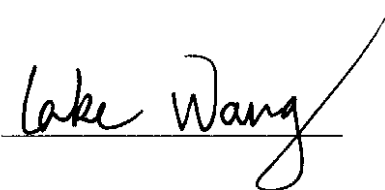


Date of Test :	Oct.09,2005	Temperature :	23°C
EUT :	2.4GHz Wireless Baby Monitor	Humidity :	54%
Model No. :	SY-172	Test Mode :	TX Channel 3
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Probe Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dBμV/ m	Limits dBμV/ m	Remark
2450.400	35.17	29.11	6.28	95.21	95.43	-18.57	114.00	Peak
4900.800	34.48	34.16	9.75	60.59	70.02	-3.98	74.00	Peak
7351.200	34.47	37.55	10.84	53.81	67.73	-6.27	74.00	Peak
9801.500	36.04	37.98	11.55	51.67	65.16	-8.84	74.00	Peak
12252.000	36.31	36.46	11.69	47.05	61.89	-12.11	74.00	Peak
2450.400	35.17	29.11	6.28	84.38	84.60	-9.40	94.00	Average
4900.800	34.48	34.16	9.75	37.07	46.50	-7.50	54.00	Average
7351.200	34.47	37.55	10.84	34.28	48.20	-5.80	54.00	Average
9801.500	36.04	37.98	11.55	33.71	47.20	-6.80	54.00	Average
12252.000	36.31	36.46	11.69	32.36	47.20	-6.80	54.00	Average

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss-Preamplifier Factor
2.The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer :

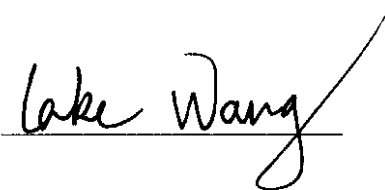


Date of Test :	Oct.09,2005	Temperature :	23°C
EUT :	2.4GHz Wireless Baby Monitor	Humidity :	54%
Model No. :	SY-172	Test Mode :	TX Channel 3
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Probe Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dBμV/m	Limits dBμV/m	Remark
2450.400	35.17	29.11	6.28	96.21	96.43	-17.57	114.00	Peak
4900.800	34.48	34.16	9.75	59.59	69.02	-4.98	74.00	Peak
7351.200	34.47	37.55	10.84	53.81	67.73	-6.27	74.00	Peak
9801.500	36.04	37.98	11.55	52.67	66.16	-7.84	74.00	Peak
12252.000	36.31	36.46	11.69	49.05	63.89	-10.11	74.00	Peak
2450.400	35.17	29.11	6.28	83.38	83.60	-10.40	94.00	Average
4900.800	34.48	34.16	9.75	38.07	47.50	-6.50	54.00	Average
7351.200	34.47	37.55	10.84	33.28	47.20	-6.80	54.00	Average
9801.500	36.04	37.98	11.55	33.71	47.20	-6.80	54.00	Average
12252.000	36.31	36.46	11.69	30.36	45.20	-8.80	54.00	Average

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss-Preamp Factor
2.The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer :

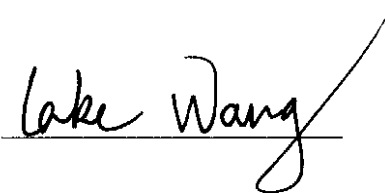


Date of Test :	Oct.09,2005	Temperature :	23°C
EUT :	2.4GHz Wireless Baby Monitor	Humidity :	54%
Model No. :	SY-172	Test Mode :	TX Channel 4
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Probe Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dBμV/ m	Limits dBμV/ m	Remark
2468.100	35.16	29.19	6.30	95.01	95.34	-18.66	114.00	Peak
4936.200	34.47	34.20	9.82	60.18	69.73	-4.27	74.00	Peak
7404.300	34.48	37.63	10.87	52.70	66.72	-7.28	74.00	Peak
9872.400	36.10	37.93	11.55	51.12	64.50	-9.50	74.00	Peak
12340.500	36.28	39.41	11.63	49.56	64.32	-9.68	74.00	Peak
2468.100	35.16	29.19	6.30	86.17	86.50	-7.50	94.00	Average
4936.200	34.47	34.20	9.82	39.65	49.20	-4.80	54.00	Average
7404.300	34.48	37.63	10.87	33.18	47.20	-6.80	54.00	Average
9872.400	36.10	37.93	11.55	33.22	46.60	-7.40	54.00	Average
12340.500	36.28	39.41	11.63	30.84	45.60	-8.40	54.00	Average

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss-Preamplifier Factor
2.The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer :

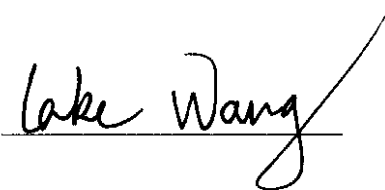


Date of Test :	Oct.09,2005	Temperature :	23°C
EUT :	2.4GHz Wireless Baby Monitor	Humidity :	54%
Model No. :	SY-172	Test Mode :	TX Channel 4
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Probe Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dBμV/m	Limits dBμV/m	Remark
2468.100	35.16	29.19	6.30	94.01	94.34	-19.66	114.00	Peak
4936.200	34.47	34.20	9.82	60.18	69.73	-4.27	74.00	Peak
7404.300	34.48	37.63	10.87	52.70	66.72	-7.28	74.00	Peak
9872.400	36.10	37.93	11.55	53.12	66.50	-7.50	74.00	Peak
12340.500	36.28	39.41	11.63	46.56	61.32	-12.68	74.00	Peak
2468.100	35.16	29.19	6.30	84.17	84.50	-9.50	94.00	Average
4936.200	34.47	34.20	9.82	38.65	48.20	-5.80	54.00	Average
7404.300	34.48	37.63	10.87	32.18	46.20	-7.80	54.00	Average
9872.400	36.10	37.93	11.55	33.22	46.60	-7.40	54.00	Average
12340.500	36.28	39.41	11.63	31.84	46.60	-7.40	54.00	Average

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss-Preamp Factor
2.The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer :

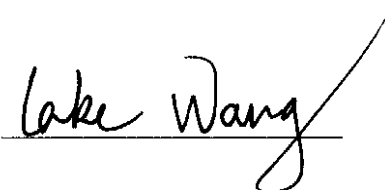




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 4 File#: Shuoying.EMI Date: 2005-09-08 Time: 11:09:30

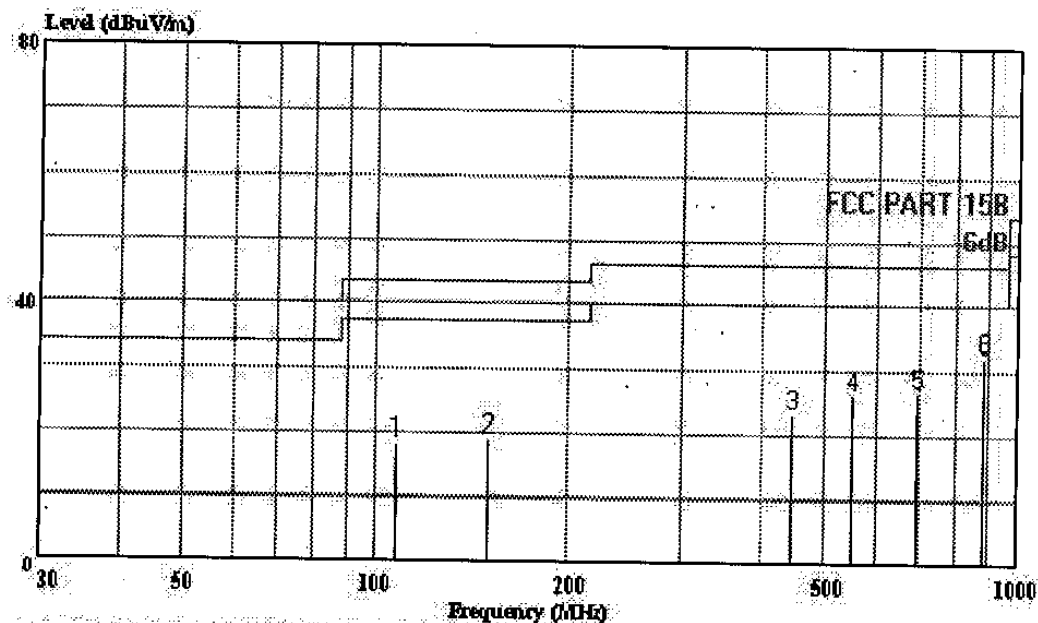

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref. Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 EUT : 2.4GHz Wireless Baby Monitor
 M/N : SY-172
 Test Spec : DC 9V Adaptor Input AC 120V/60Hz
 Test Engineer: Mario
 OP Condition : TX
 Comment : Temp:23' Humi:54%
 Memo : H:1.35m Deg:205'

Page:

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1	107.600	18.47	-25.03	43.50	4.96	11.24	2.26
2	150.280	18.93	-24.57	43.50	4.58	11.63	2.72
3	446.130	23.37	-22.63	46.00	1.76	16.66	4.96
4	552.830	26.25	-19.75	46.00	1.75	18.99	5.51
5	697.360	26.65	-19.35	46.00	0.03	20.38	6.24
6	882.630	32.21	-13.79	46.00	2.79	22.05	7.37



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park


Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 2

File#: Shuoying.EMI

Date: 2005-09-08 Time: 11:05:51

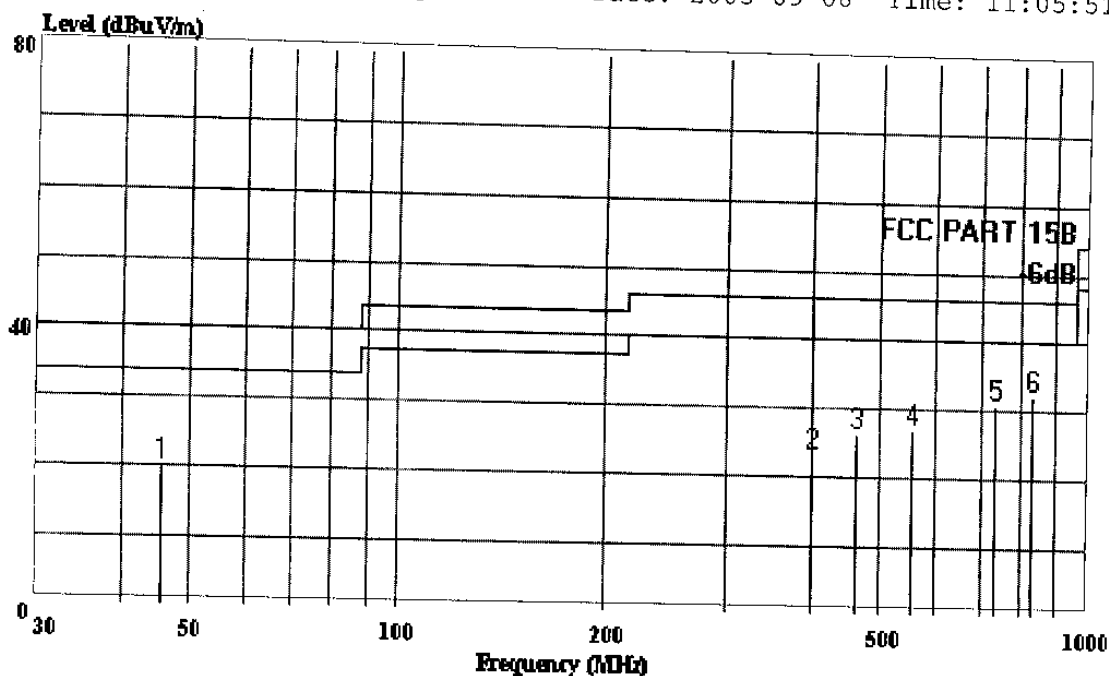

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4GHz Wireless Baby Monitor
 M/N : SY-172
 Test Spec : DC 9V Adaptor Input AC 120V/60Hz
 Test Engineer: Mario
 OP Condition : TX
 Comment : Temp:23' Humi:54%
 Memo : H:1.0m Deg:124'

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1	45.520	20.09	-19.91	40.00	10.36	8.27	1.47
2	400.540	23.22	-22.78	46.00	2.68	15.85	4.69
3	461.650	26.39	-19.61	46.00	4.69	16.60	5.10
4	557.680	27.18	-18.82	46.00	1.79	19.74	5.65
5	732.280	30.67	-15.33	46.00	2.88	21.21	6.58
6	829.280	32.19	-13.81	46.00	3.18	22.05	6.96




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 27 File#: C:\EMI TEST DATA\S\Shuoying.EMI

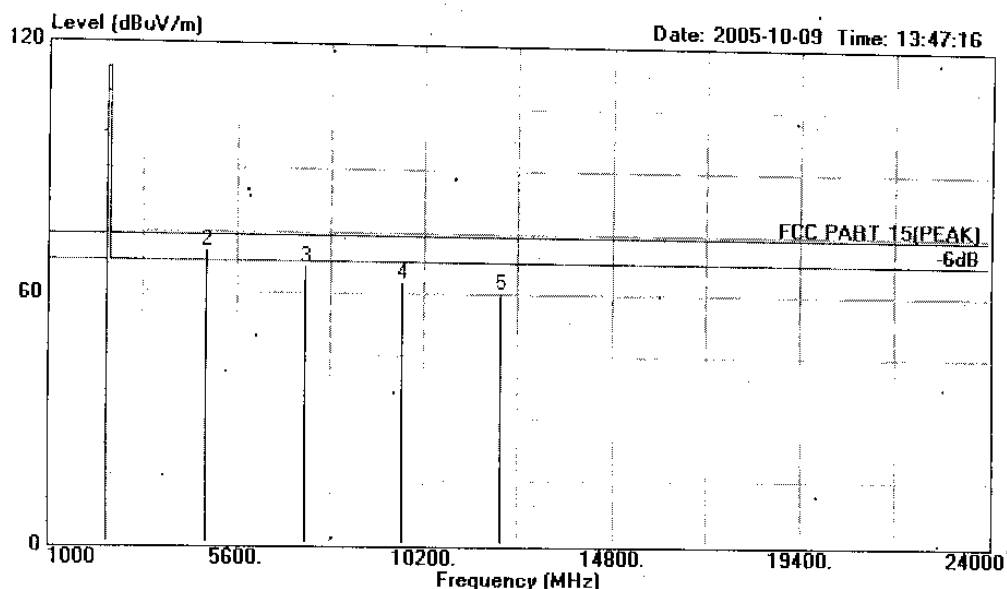

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Saco
Op Condition : TX
Memo : Temp:23' Humi:54%
Channel 1

		Over	Limit	Read	Cable	Probe	Preamp	
Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2414.200	94.42	-19.58	114.00	94.37	6.20	29.03	35.18 Peak
2	4828.400	70.51	-3.49	74.00	61.49	9.55	33.96	34.49 Peak
3	7242.600	66.56	-7.44	74.00	52.83	10.78	37.39	34.44 Peak
4	9656.800	63.08	-10.92	74.00	49.34	11.54	38.12	35.92 Peak
5	12071.000	60.63	-13.37	74.00	45.64	11.81	39.55	36.37 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 28 File#: C:\EMI TEST DATA\S\Shuoying.EMI

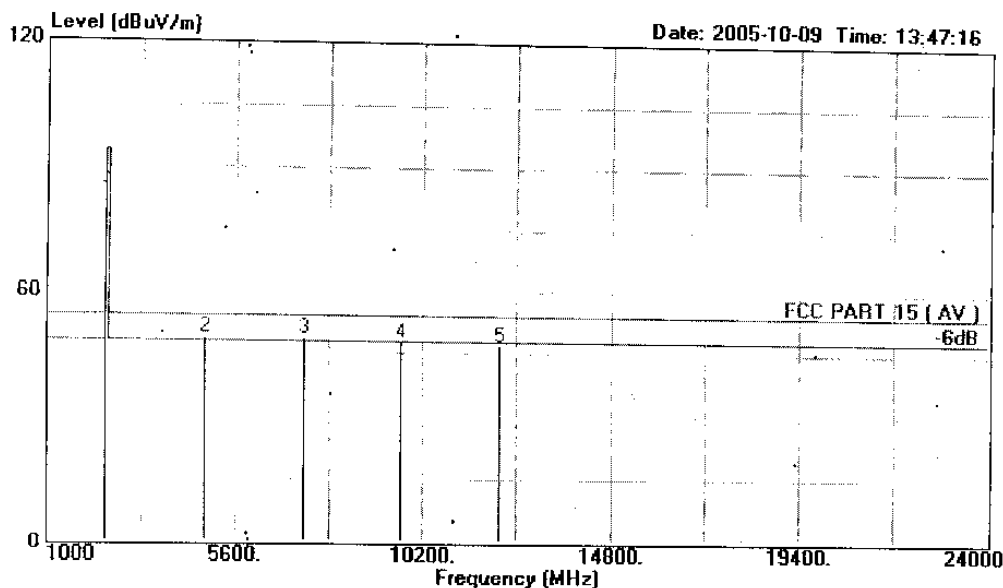

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23 Humi:54%
Channel 1

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	dB	
1	2414.200	81.60	-12.40	94.00	81.55	6.20	29.03	35.18	Average
2	4828.400	49.00	-5.00	54.00	39.98	9.55	33.96	34.49	Average
3	7242.600	49.00	-5.00	54.00	35.27	10.78	37.39	34.44	Average
4	9656.800	48.00	-6.00	54.00	34.26	11.54	38.12	35.92	Average
5	12071.000	47.00	-7.00	54.00	32.01	11.81	39.55	36.37	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 25 File#: C:\EMI TEST DATA\S\Shuoying.EMI

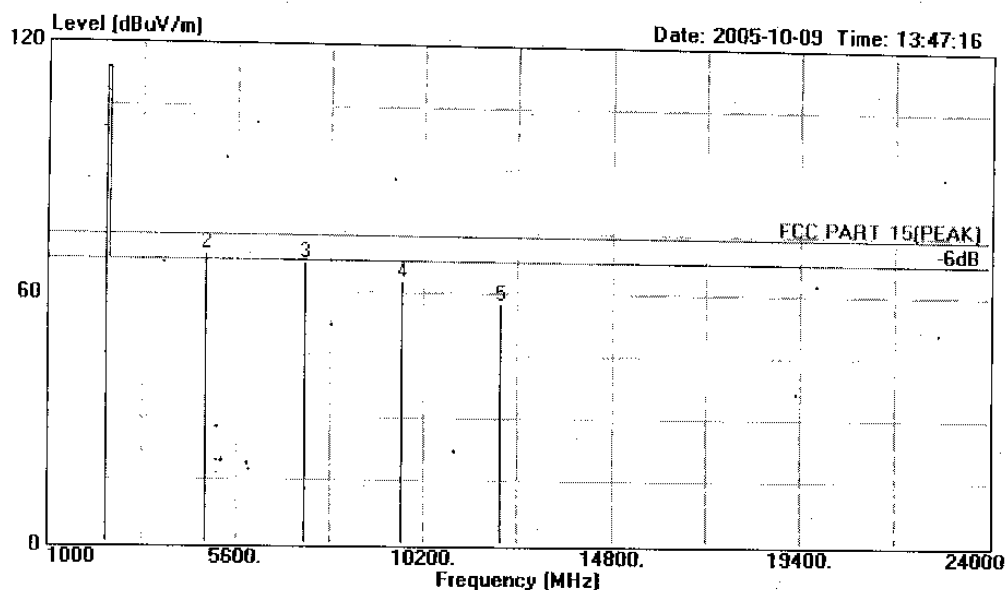

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23° Humid:54%
Channel 1

			Over	Limit	Read	Cable	Probe	Preamp	
	Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2414.200	95.42	-18.58	114.00	95.37	6.20	29.03	35.18	Peak
2	4828.400	69.51	-4.49	74.00	60.49	9.55	33.96	34.49	Peak
3	7242.600	67.56	-6.44	74.00	53.83	10.78	37.39	34.44	Peak
4	9656.800	63.08	-10.92	74.00	49.34	11.54	38.12	35.92	Peak
5	12071.000	57.63	-16.37	74.00	42.64	11.81	39.55	36.37	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 26 File#: C:\EMI TEST DATA\S\Shuoying.EMI

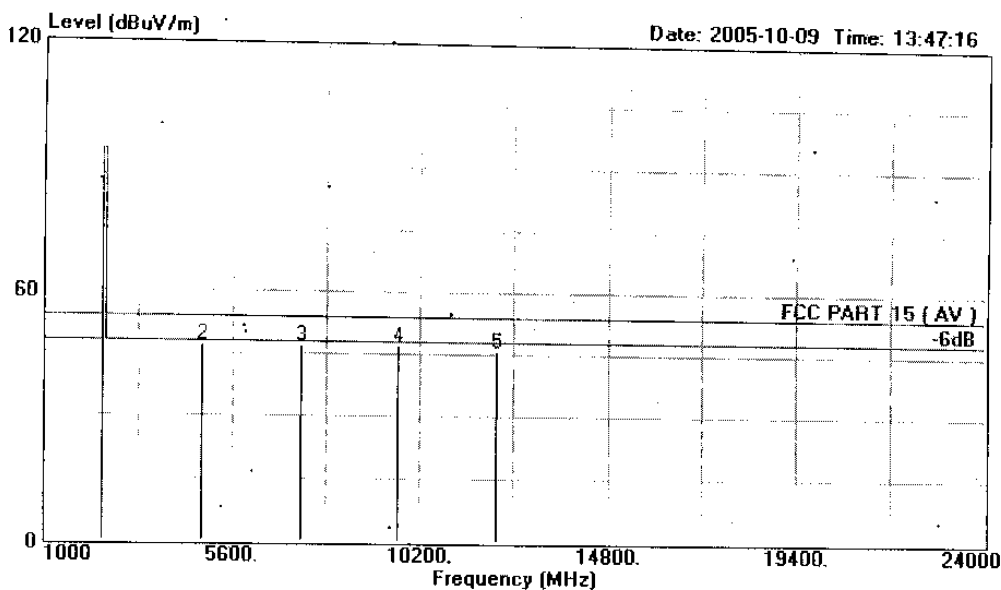

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
: Channel 1

			Over	Limit	Read	Cable	Probe	Preamp	
	Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2414.200	82.60	-11.40	94.00	82.55	6.20	29.03	35.18	Average
2	4828.400	47.00	-7.00	54.00	37.98	9.55	33.96	34.49	Average
3	7242.600	47.00	-7.00	54.00	33.27	10.78	37.39	34.44	Average
4	9656.800	47.00	-7.00	54.00	33.26	11.54	38.12	35.92	Average
5	12071.000	46.00	-8.00	54.00	31.01	11.81	39.55	36.37	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 31 File#: C:\EMI TEST DATA\S\Shuoying.EMI

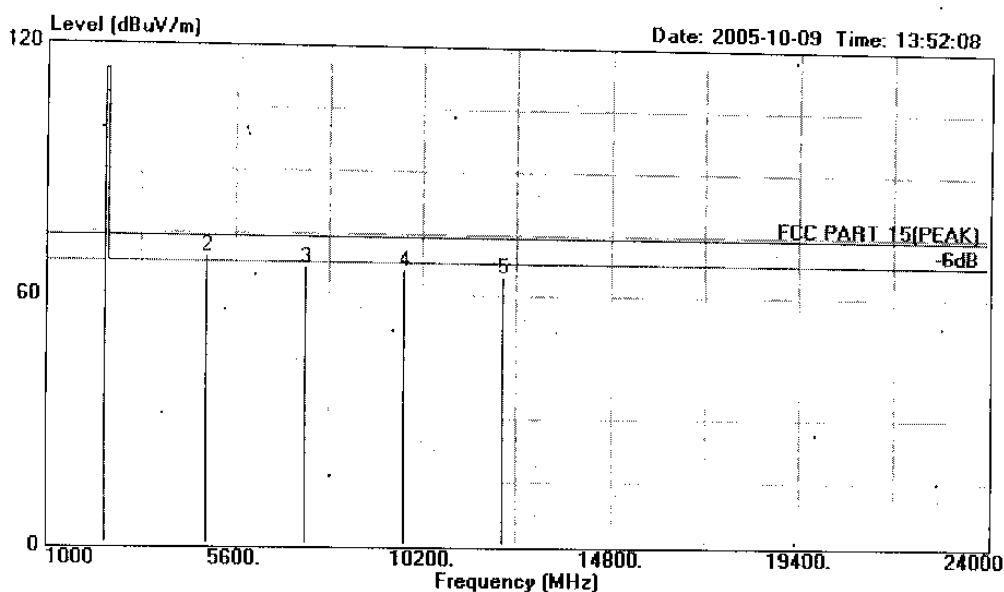

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC, 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23° Humi:54%
: Channel 2

			Over	Limit	Read	Cable	Probe	Preamp	
Freq	Level	Limit	Limit	Line	Level	Loss	Factor	Factor	Remark
MHz	dBuV/m		dB	dBuV/m	dBuV	dB	dB	dB	
1 2432.200	95.43	-18.57	114.00	95.31	6.22	29.07	35.17	Peak	
2 4864.400	69.02	-4.98	74.00	59.79	9.67	34.04	34.48	Peak	
3 7296.600	66.74	-7.26	74.00	52.89	10.81	37.50	34.46	Peak	
4 9728.800	66.20	-7.80	74.00	52.62	11.54	38.04	36.00	Peak	
5 12161.000	64.85	-9.15	74.00	49.95	11.75	39.50	36.35	Peak	




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 32

File#: C:\EMI TEST DATA\S\Shuoying.EMI

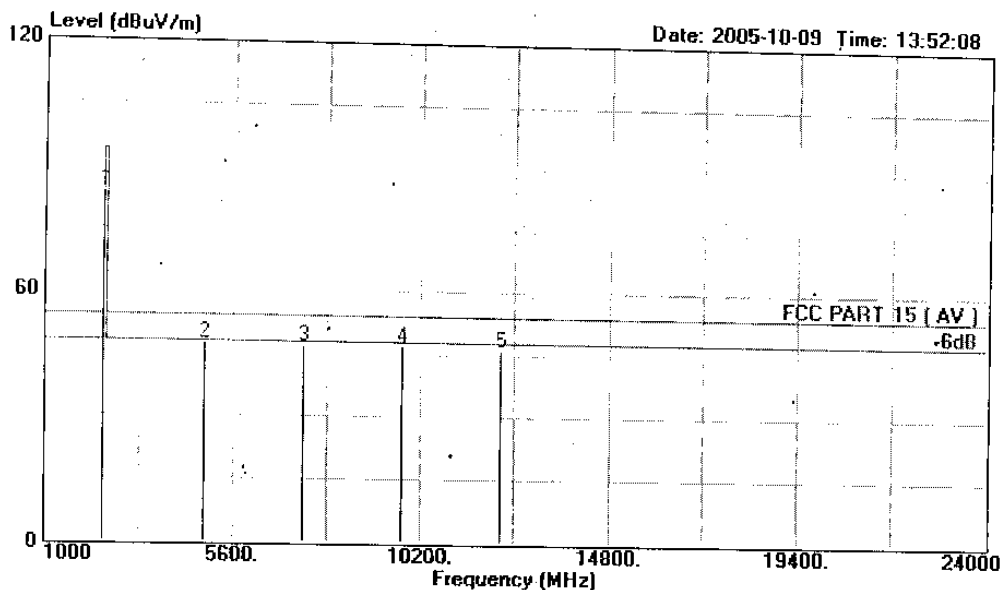

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23 Humi:54%
Channel 2

			Over	Limit	Read	Cable	Probe	Preamp	
	Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2432.200	83.60	-10.40	94.00	83.48	6.22	29.07	35.17	Average
2	4864.400	47.50	-6.50	54.00	38.27	9.67	34.04	34.48	Average
3	7296.600	47.20	-6.80	54.00	33.35	10.81	37.50	34.46	Average
4	9728.800	47.20	-6.80	54.00	33.62	11.54	38.04	36.00	Average
5	12161.000	46.20	-7.80	54.00	31.30	11.75	39.50	36.35	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 29

File#: C:\EMI TEST DATA\S\Shuoying.EMI

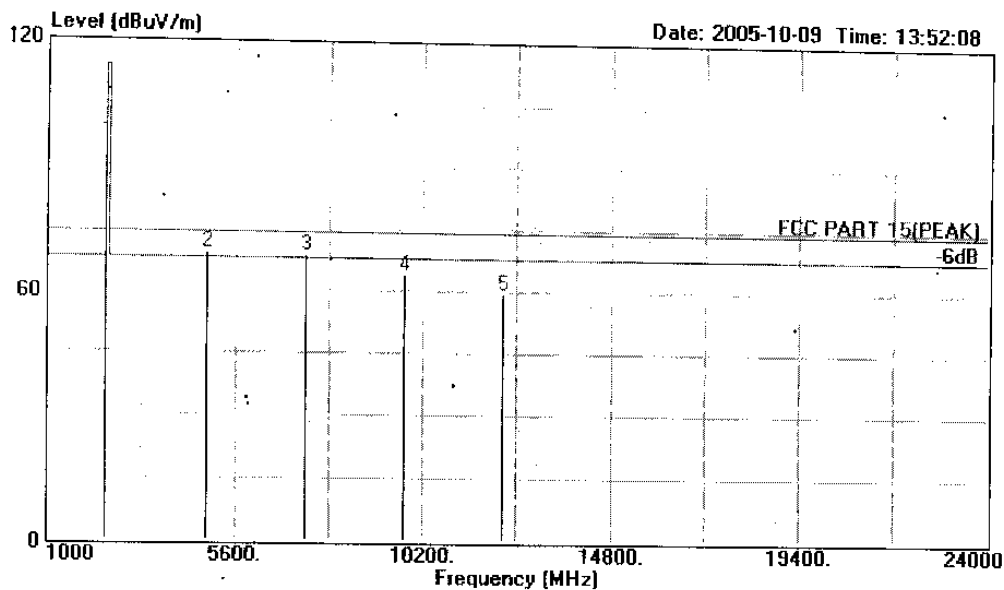

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23° Humi:54%
: Channel 2

			Over	Limit	Read	Cable	Probe	Preamp	
Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		
1	2432.200	95.43	-18.57	114.00	95.31	6.22	29.07	35.17	Peak
2	4864.400	69.02	-4.98	74.00	59.79	9.67	34.04	34.48	Peak
3	7296.600	68.74	-5.26	74.00	54.89	10.81	37.50	34.46	Peak
4	9728.800	64.20	-9.80	74.00	50.62	11.54	38.04	36.00	Peak
5	12161.000	59.85	-14.15	74.00	44.95	11.75	39.50	36.35	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 30

File#: C:\EMI TEST DATA\S\Shuoying.EMI

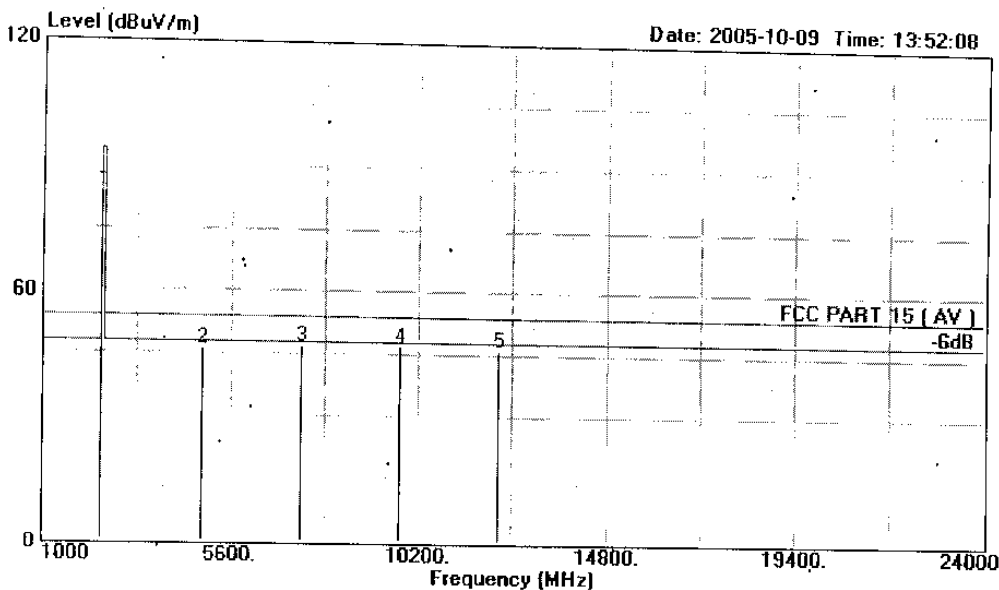

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
Channel 2

			Over	Limit	Read	Cable	Probe	Preamp	
	Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2432.200	83.60	-10.40	94.00	83.48	6.22	29.07	35.17	Average
2	4864.400	46.50	-7.50	54.00	37.27	9.67	34.04	34.48	Average
3	7296.600	47.20	-6.80	54.00	33.35	10.81	37.50	34.46	Average
4	9728.800	47.20	-6.80	54.00	33.62	11.54	38.04	36.00	Average
5	12161.000	46.20	-7.80	54.00	31.30	11.75	39.50	36.35	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 33 File#: C:\EMI TEST DATA\S\Shuoying.EMI

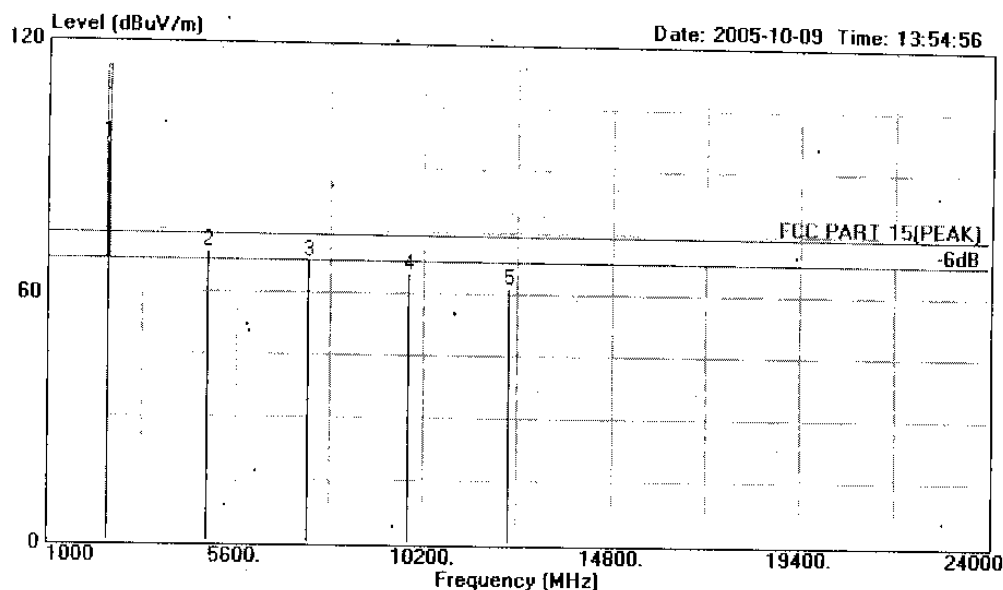

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
: Channel 3

			Over	Limit	Read	Cable	Probe	Preamp	
	Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2450.400	95.43	-18.57	114.00	95.21	6.28	29.11	35.17	Peak
2	4900.800	70.02	-3.98	74.00	60.59	9.75	34.16	34.48	Peak
3	7351.200	67.73	-6.27	74.00	53.81	10.84	37.55	34.47	Peak
4	9801.800	65.16	-8.84	74.00	51.67	11.55	37.98	36.04	Peak
5	12252.000	61.89	-12.11	74.00	47.05	11.69	39.46	36.31	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 34 File#: C:\EMI TEST DATA\S\Shuoying.EMI

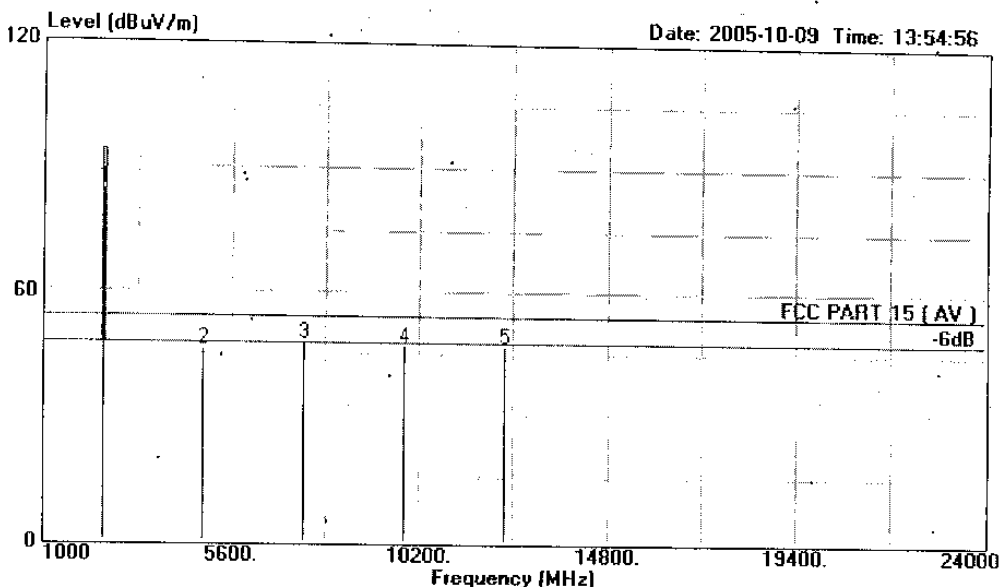

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23° Humi:54%
Channel 3

		Over	Limit	Read	Cable	Probe	Preamp	
Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2450.400	84.60	-9.40	94.00	84.36	6.28	29.11	35.17 Average
2	4900.800	46.50	-7.50	54.00	37.07	9.75	34.16	34.48 Average
3	7351.200	48.20	-5.80	54.00	34.28	10.84	37.55	34.47 Average
4	9801.600	47.20	-6.80	54.00	33.71	11.55	37.98	36.04 Average
5	12252.000	47.20	-6.80	54.00	32.36	11.69	39.46	36.31 Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 35

File#: C:\EMI TEST DATA\S\Shuoying.EMI

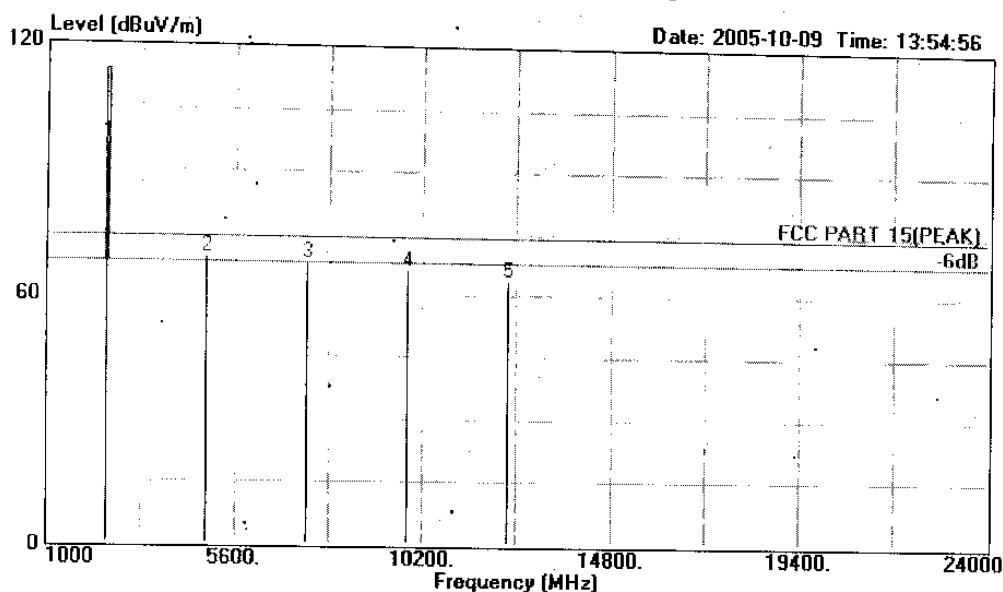

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23° Humi:54%
 : Channel 3

			Over	Limit	Read	Cable	Probe	Preamp	
	Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2450.400	96.43	-17.57	114.00	96.21	6.28	29.11	35.17	Peak
2	4900.800	69.02	-4.98	74.00	59.59	9.75	34.16	34.48	Peak
3	7351.200	67.73	-6.27	74.00	53.81	10.84	37.55	34.47	Peak
4	9801.600	66.16	-7.84	74.00	52.67	11.55	37.98	36.04	Peak
5	12252.000	63.89	-10.11	74.00	49.05	11.69	39.46	36.31	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 36

File#: C:\EMI TEST DATA\S\Shuoying.EMI

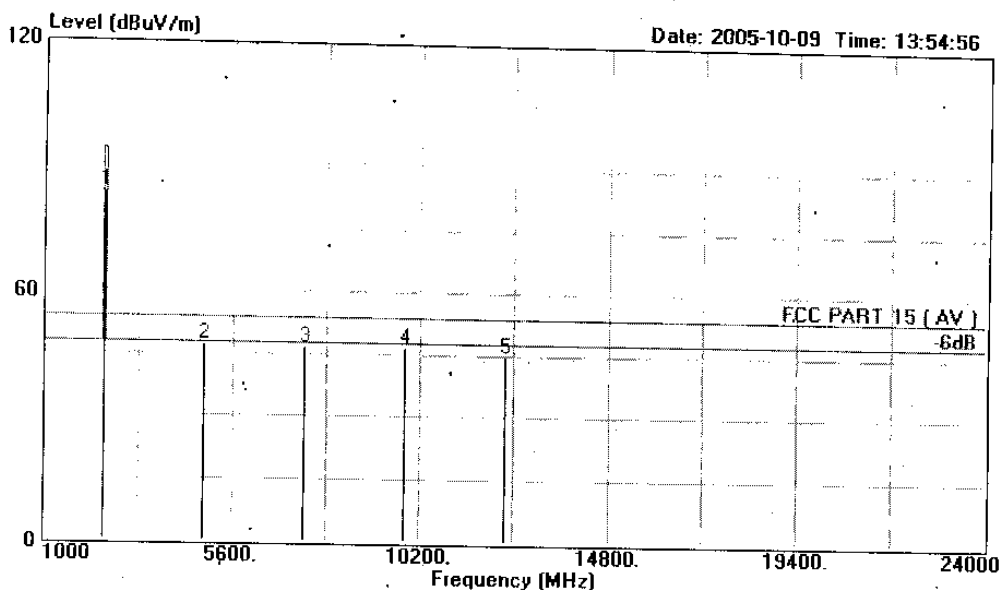

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23° Humi:54%
Channel 3

			Over	Limit	Read	Cable	Probe	Preamp	
	Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2450.400	83.60	-10.40	94.00	83.38	6.28	29.11	35.17	Average
2	4900.800	47.50	-6.50	54.00	38.07	9.75	34.16	34.48	Average
3	7351.200	47.20	-6.80	54.00	33.28	10.84	37.55	34.47	Average
4	9801.600	47.20	-6.80	54.00	33.71	11.55	37.98	36.04	Average
5	12252.000	45.20	-8.80	54.00	30.36	11.69	39.46	36.31	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 37

File#: C:\EMI TEST DATA\S\Shuoying.EMI

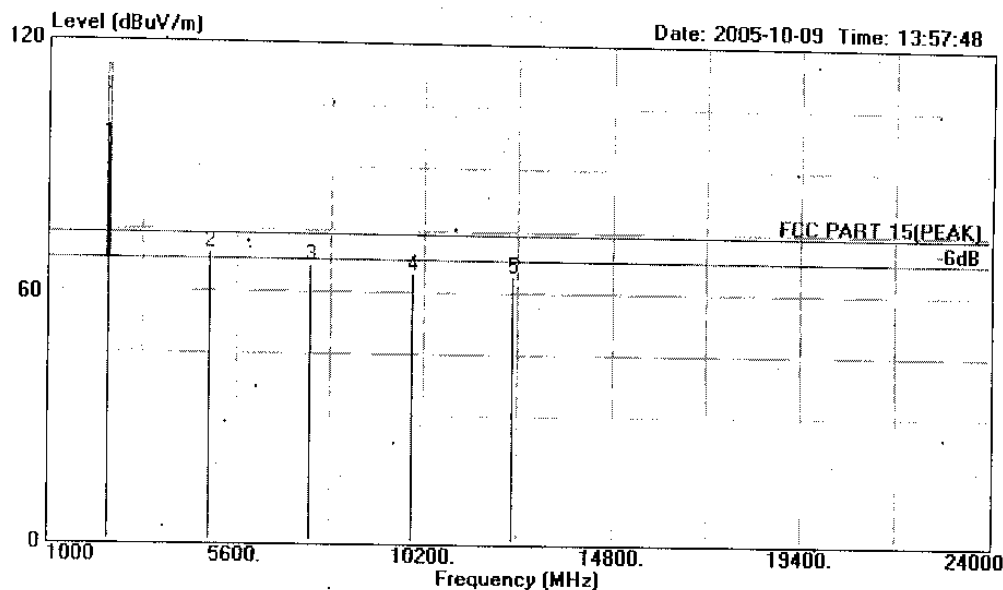

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
: Channel 4

			Over	Limit	Read	Cable	Probe	Preamp	
Freq	Level	Limit	Limit	Line	Level	Loss	Factor	Factor	Remark
MHz	dBuV/m		dB	dBuV/m	dBuV	dB	dB	dB	
1	2468.100	95.34	-18.66	114.00	95.01	6.30	29.19	35.16	Peak
2	4936.200	69.73	-4.27	74.00	60.18	9.82	34.20	34.47	Peak
3	7404.300	66.72	-7.28	74.00	52.70	10.87	37.63	34.48	Peak
4	9872.400	64.50	-9.50	74.00	51.12	11.55	37.93	36.10	Peak
5	12340.500	64.32	-9.68	74.00	49.56	11.63	39.41	36.28	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 38 File#: C:\EMI TEST DATA\S\Shuoying.EMI

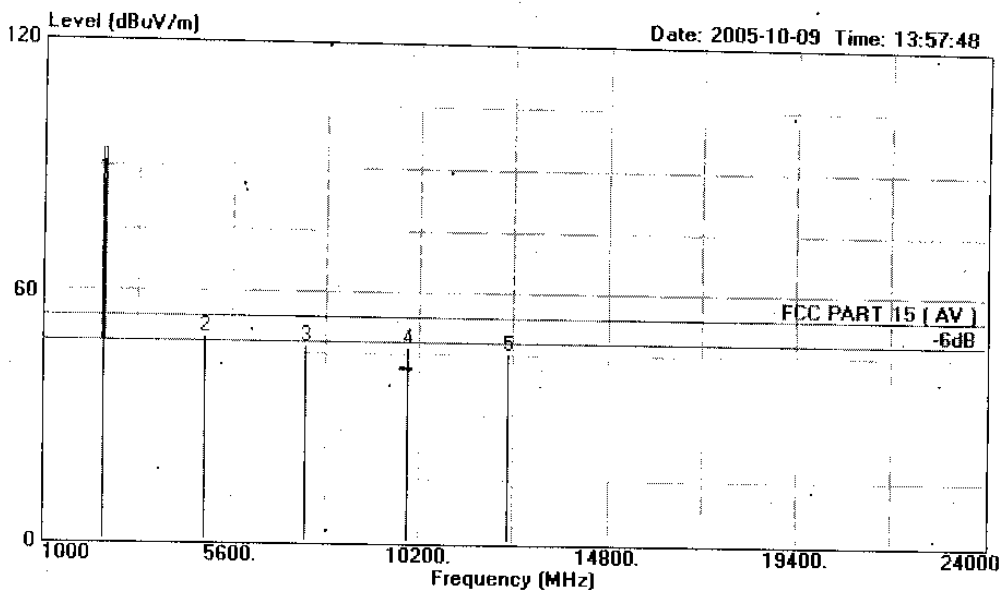

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23° Humi:54%
Channel 4

		Over	Limit	Read	Cable	Probe	Preamp	
Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1 2468.100	86.50	+7.50	94.00	86.17	6.30	29.19	35.16	Average
2 4936.200	49.20	-4.80	54.00	39.65	9.82	34.20	34.47	Average
3 7404.300	47.20	-6.80	54.00	33.18	10.87	37.63	34.48	Average
4 9872.400	46.60	-7.40	54.00	33.22	11.55	37.93	36.10	Average
5 12340.500	45.60	-8.40	54.00	30.84	11.63	39.41	36.28	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 39

File#: C:\EMI TEST DATA\S\Shuoying.EMI

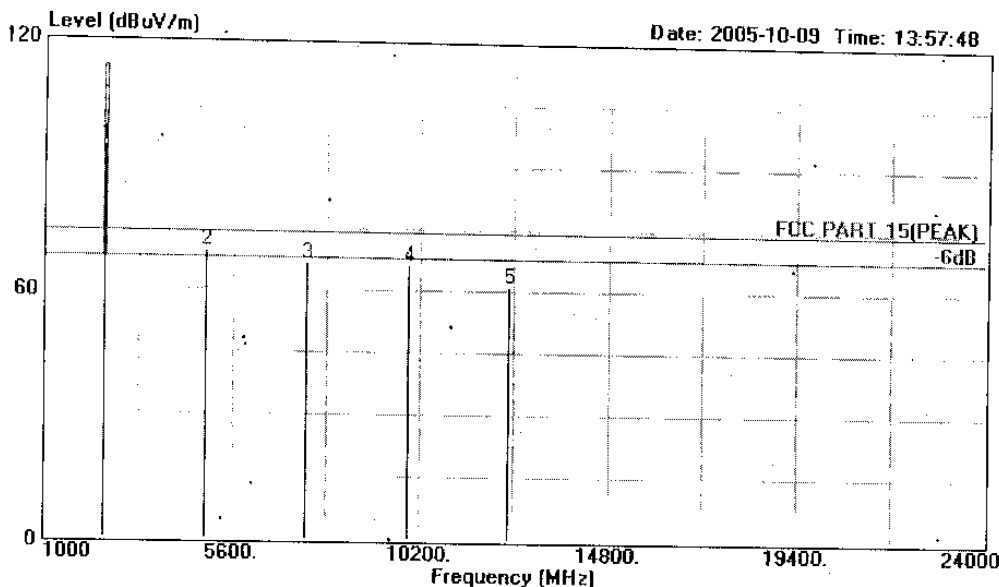

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
Channel 4

		Over	Limit	Read	Cable	Probe	Preamp	
Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1 2468.100	94.34	-19.66	114.00	94.01	6.30	29.19	35.16	Peak
2 4936.200	69.73	-4.27	74.00	60.18	9.82	34.20	34.47	Peak
3 7404.300	66.72	-7.28	74.00	52.70	10.87	37.63	34.48	Peak
4 9872.400	66.50	-7.50	74.00	53.12	11.55	37.93	36.10	Peak
5 12340.500	61.32	-12.68	74.00	46.56	11.63	39.41	36.28	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Mantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 40

File#: C:\EMI TEST DATA\S\Shuoying.EMI

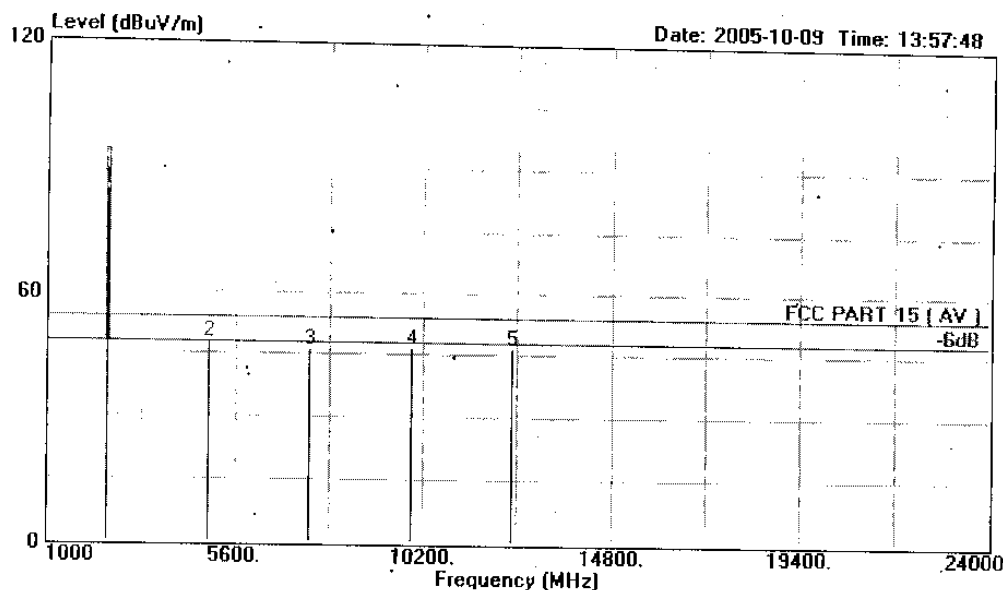

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR VERTICAL .
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23 Humi:54%
Channel 4

			Over	Limit	Read	Cable	Probe	Preamp	
	Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2468.100	84.50	-9.50	94.00	84.17	6.30	29.19	35.16	Average
2	4936.200	48.20	-5.80	54.00	38.65	9.82	34.20	34.47	Average
3	7404.300	46.20	-7.80	54.00	32.18	10.87	37.63	34.48	Average
4	9872.400	46.60	-7.40	54.00	33.22	11.55	37.93	36.10	Average
5	12340.500	46.60	-7.40	54.00	31.84	11.63	39.41	36.28	Average

4. BANDWIDTH TEST

4.1. Test Equipment

The following test equipments are used during the bandwidth test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4407B	MY41440292	May 16, 05	1 Y
2.	Antenna	EMCO	3115	9607-4877	Jun 15, 04	1.5 Y

4.2. Test Standard

The test completeness FCC 15C (249).

4.3. Bandwidth Limit

200KHz wide centered on the operation frequency.

4.4. Test Procedure

PASS.




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 12 File#: C:\EMI TEST DATA\S\Shuoying.EMI

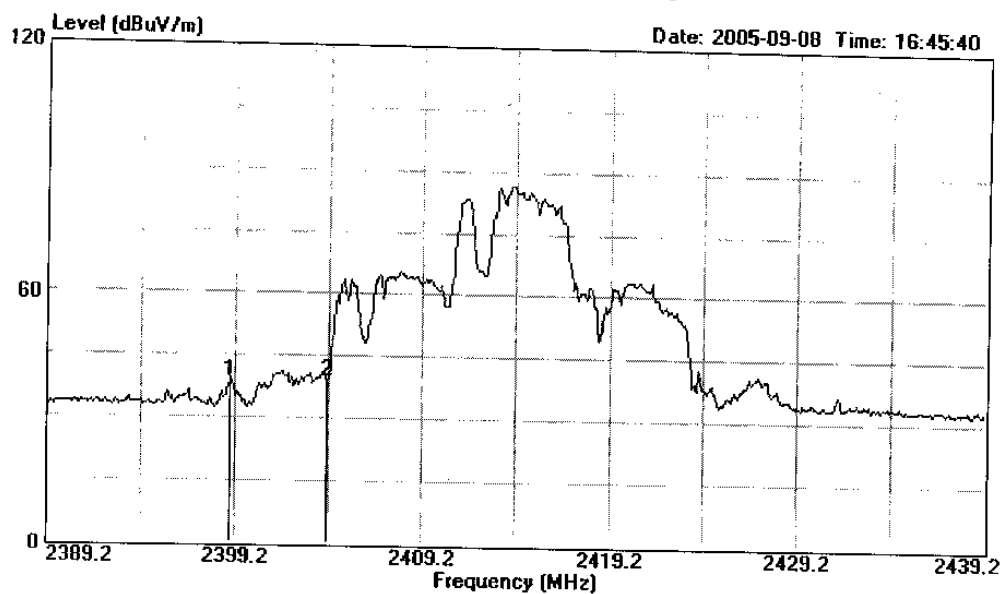

Site : 1# Chamber
Condition : 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
: Channel 1

	Freq	Level	Over	Limit	Read	Cable	Probe	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2398.900	39.14	-----	-----	39.09	6.21	29.02	Peak
2	2404.100	39.26	-----	-----	39.20	6.21	29.03	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 10 File#: C:\EMI TEST DATA\S\Shuoying.EMI

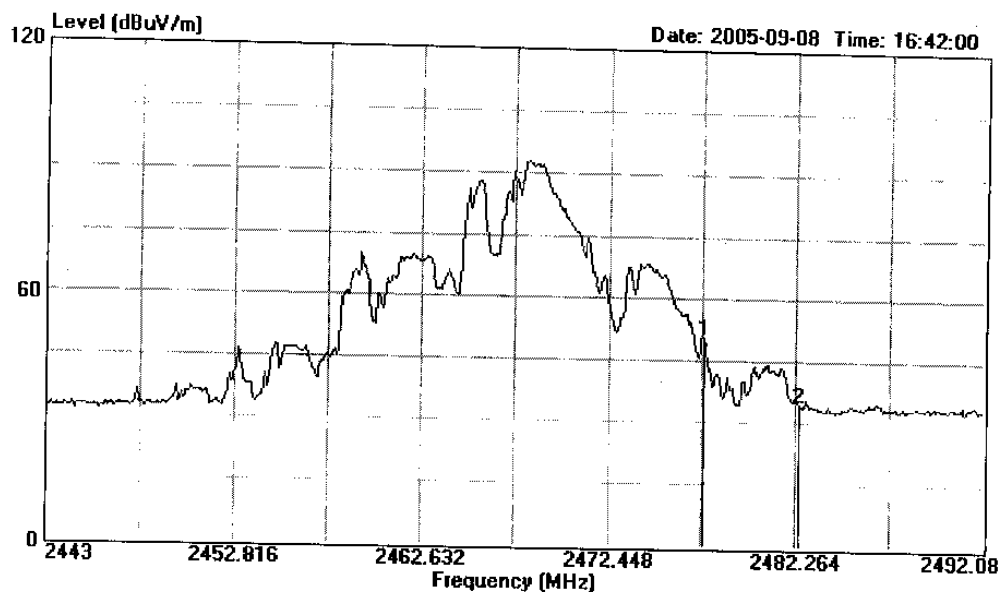

Site : 1# Chamber
Condition : 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
 : Channel 4

			Over	Limit	Read	Cable	Probe	
	Freq	Level	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2477.450	50.89	-----	-----	50.51	6.32	29.21	Peak
2	2482.450	34.76	-----	-----	34.36	6.33	29.22	Peak

APPENDIX I



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park


Tel:0755-26639496

Fax:26632877

Data#: 1

File#: Shuoying.EMI

Date: 2005-09-08 Time: 17:35:05

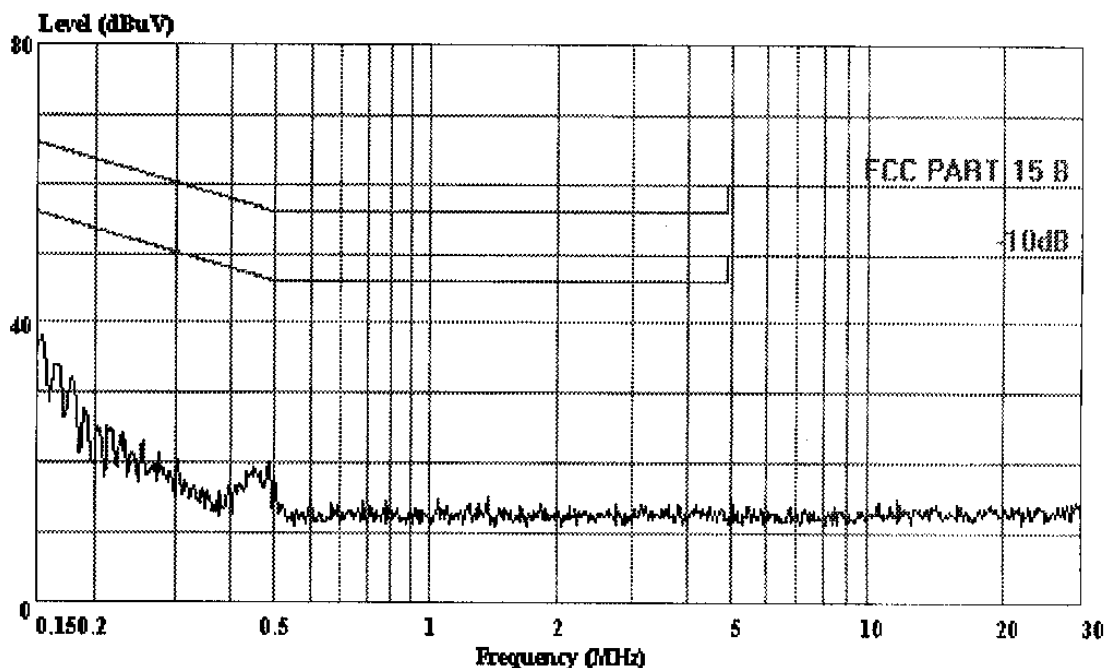

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix NO.1 CONDUCTION)

Trace:

Ref Trace:


Condition: FCC PART 15 B VA KNW-407
 EUT : 2.4GHz Wireless Baby Monitor
 M/N : SY-172
 Test Spec : DC 9V Adaptor Input AC 120V/60Hz
 Test Engineer: SAM
 Comment : Temp:23' Humi:54%
 OP Condition : TX
 Memo : Scan Peak



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 3 File#: Shuoying.EMI Date: 2005-09-08 Time: 17:36:04

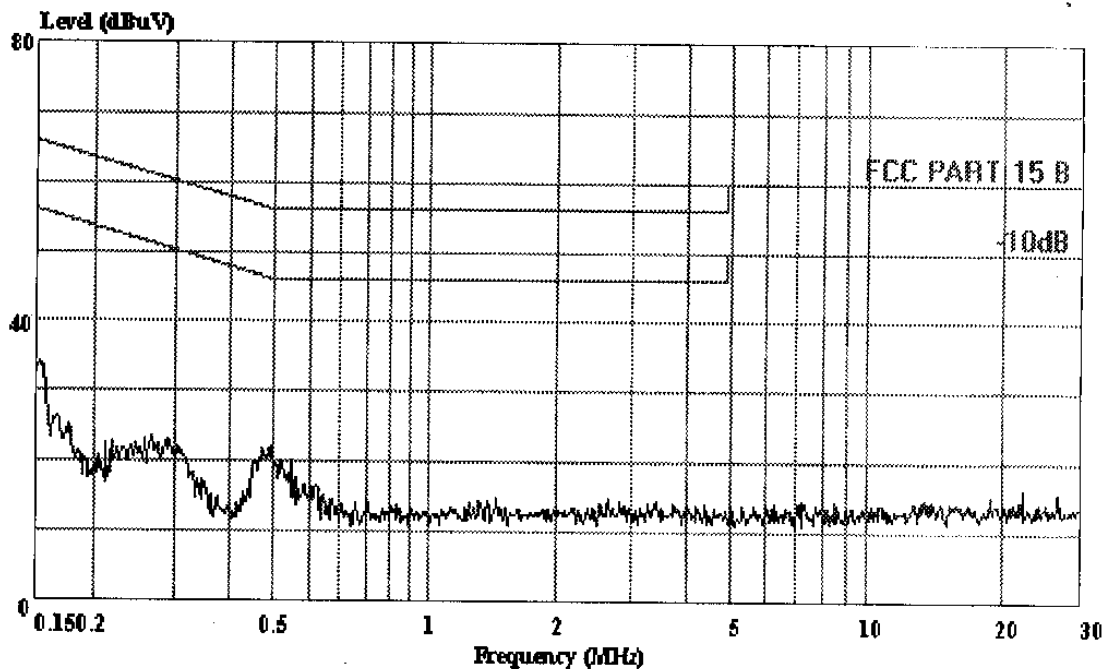

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix NO.1 CONDUCTION)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB KNW-407
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Test Spec : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer: SAM
Comment : Temp:23' Humi:54%
OP Condition : TX
Memo : Scan Peak


APPENDIX II



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Par
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 3 File#: Shuoying.EMI Date: 2005-09-08 Time: 11:08:25

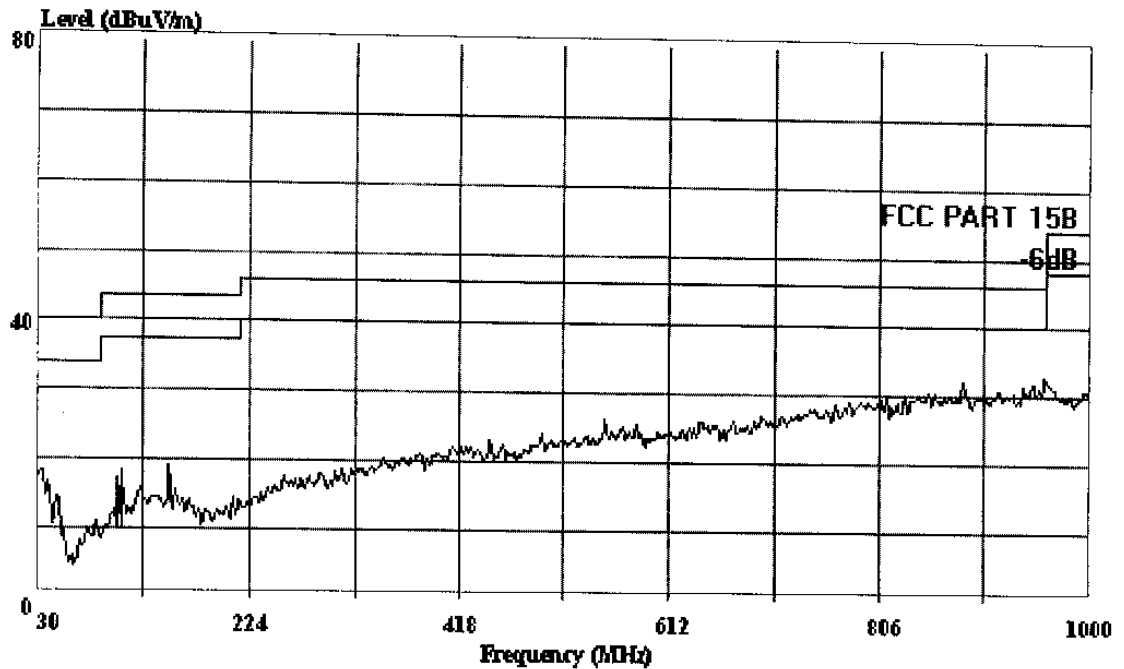

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Test Spec : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer: Mario
OP Condition : TX
Comment : Temp:23' Humi:54%
Memo :

Mario

AUDIX[®]
AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park


Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 1

File#: Shuoying.EMI

Date: 2005-09-08 Time: 11:05:29

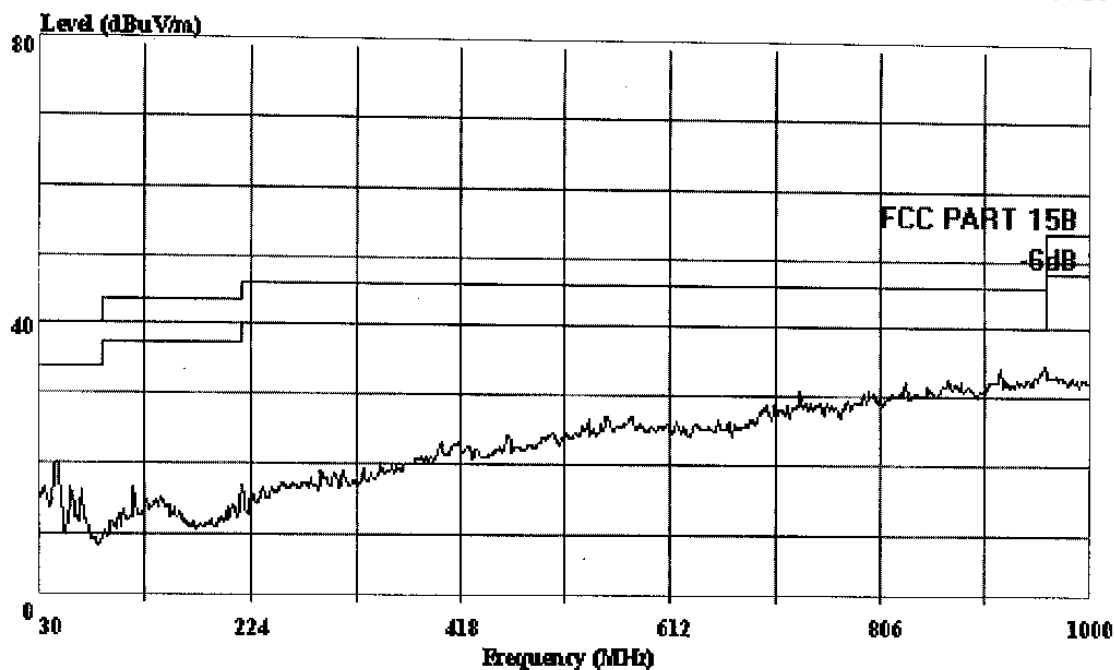

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4GHz Wireless Baby Monitor
 M/N : SY-172
 Test Spec : DC 9V Adaptor Input AC 120V/60Hz
 Test Engineer: Mario
 OP Condition : TX
 Comment : Temp:23' Humi:54%
 Memo :

Mario




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 1

File#: C:\EMI TEST DATA\S\Shuoying.EMI

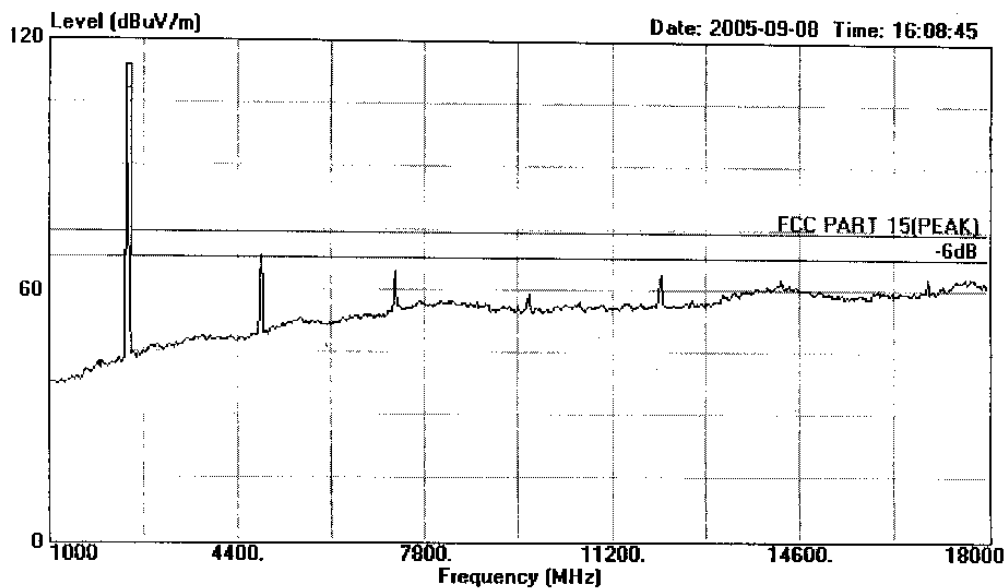

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
. : Channel 1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 2 File#: C:\EMI TEST DATA\S\Shuoying.EMI

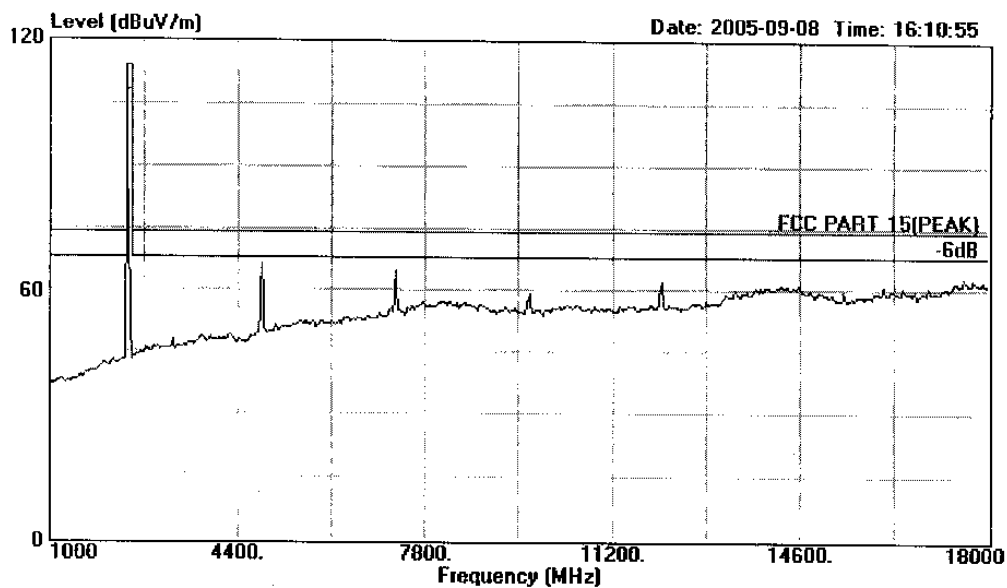

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
Channel 1


**信華科技(深圳)有限公司**

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 4

File#: C:\EMI TEST DATA\S\Shuoying.EMI

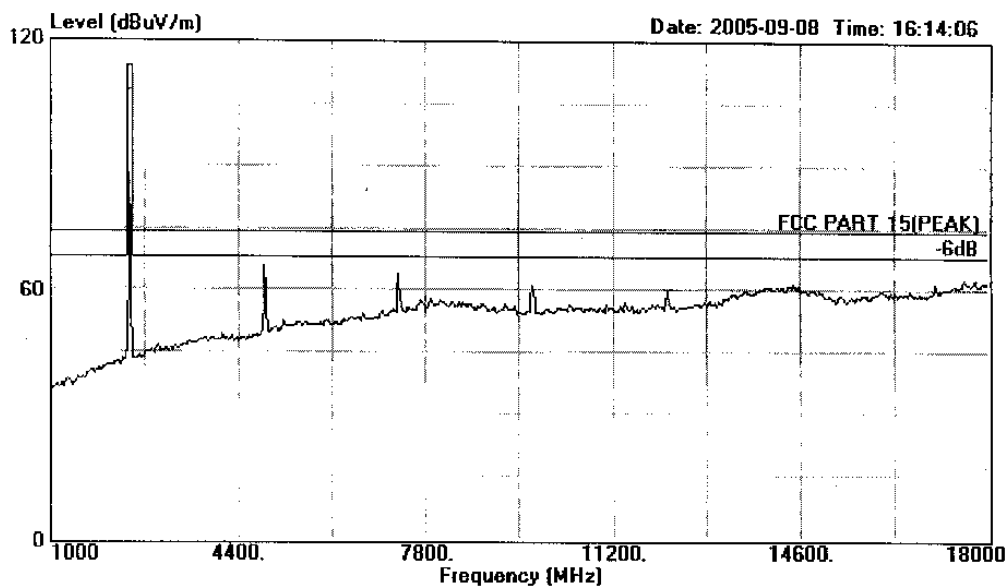

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
: Channel 2




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 3 File#: C:\EMI TEST DATA\S\Shuoying.EMI

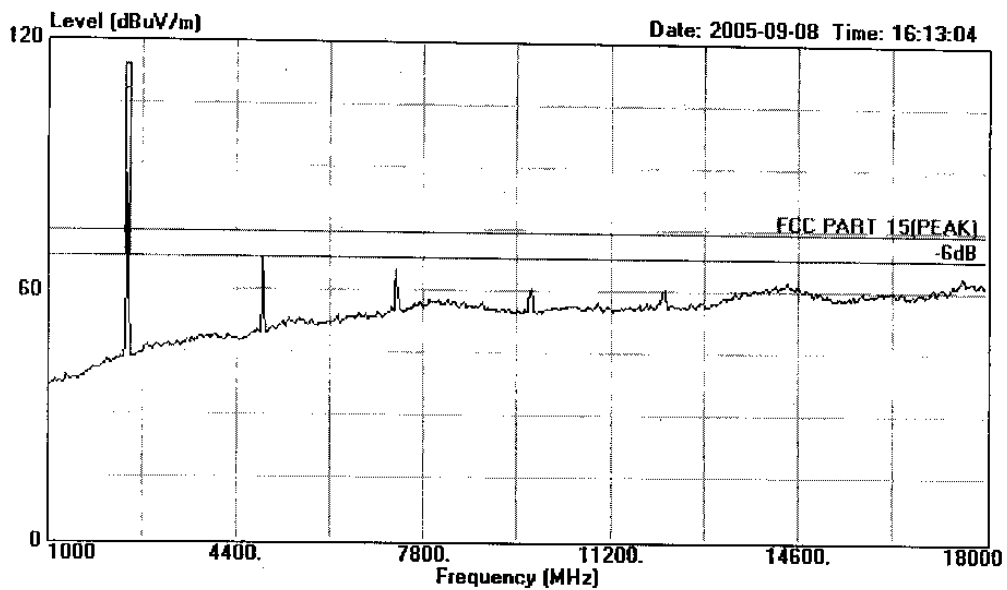

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
 : Channel 2




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 5 File#: C:\EMI TEST DATA\S\Shuoying.EMI

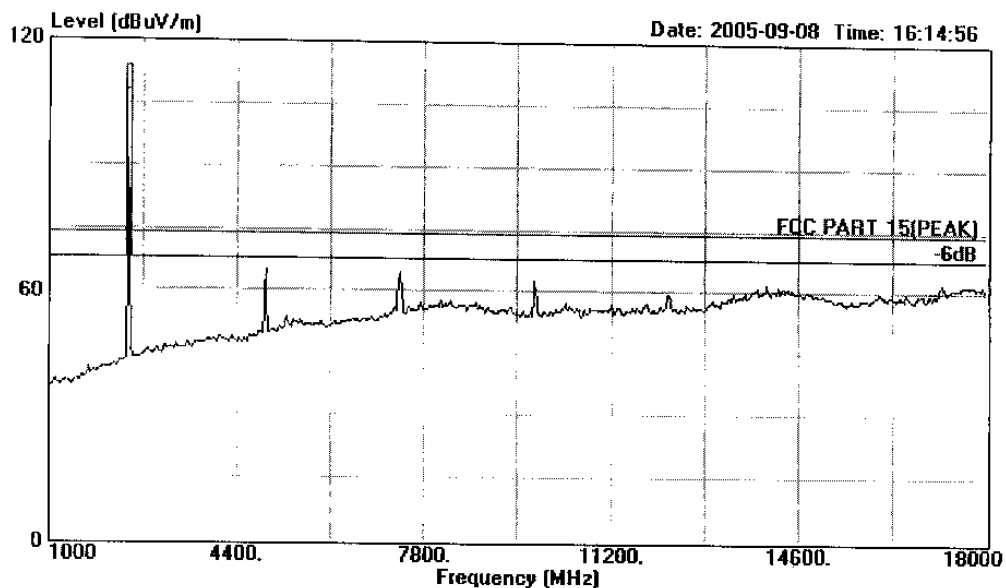

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
 : Channel 3




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 6 File#: C:\EMI TEST DATA\S\Shuoying.EMI

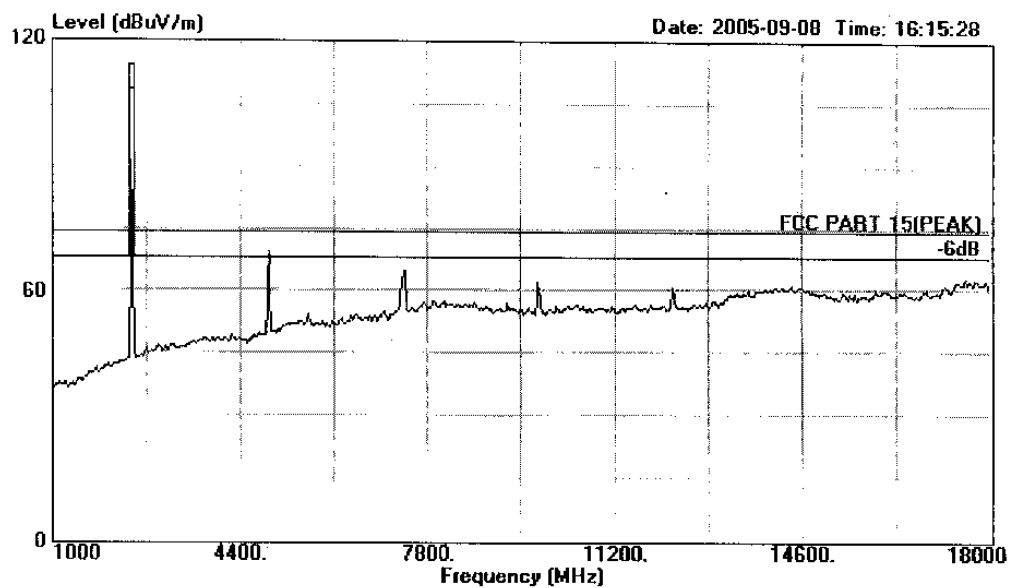

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
: Channel 3




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 8 File#: C:\EMI TEST DATA\S\Shuoying.EMI

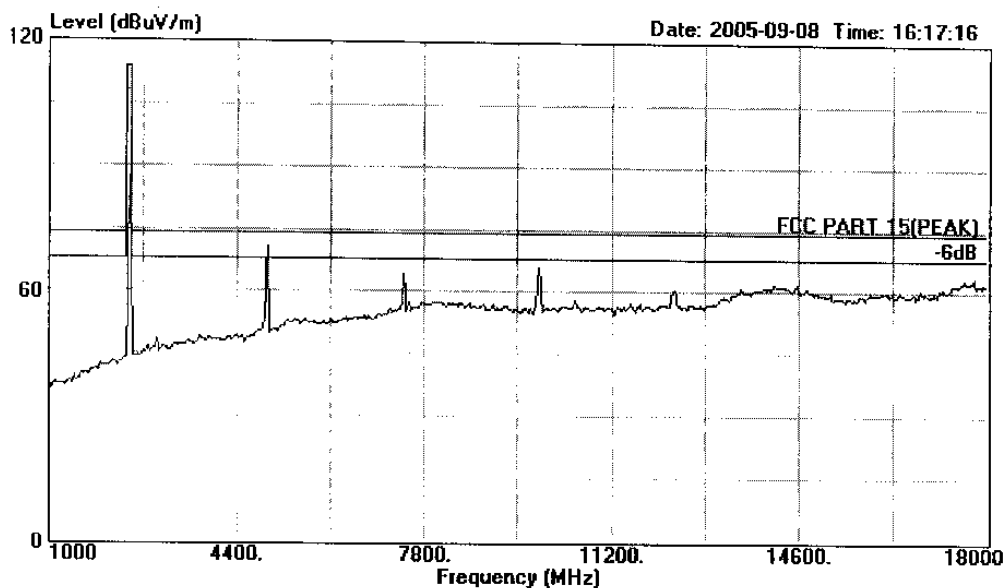

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
: Channel 4




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 7

File#: C:\EMI TEST DATA\S\Shuoying.EMI

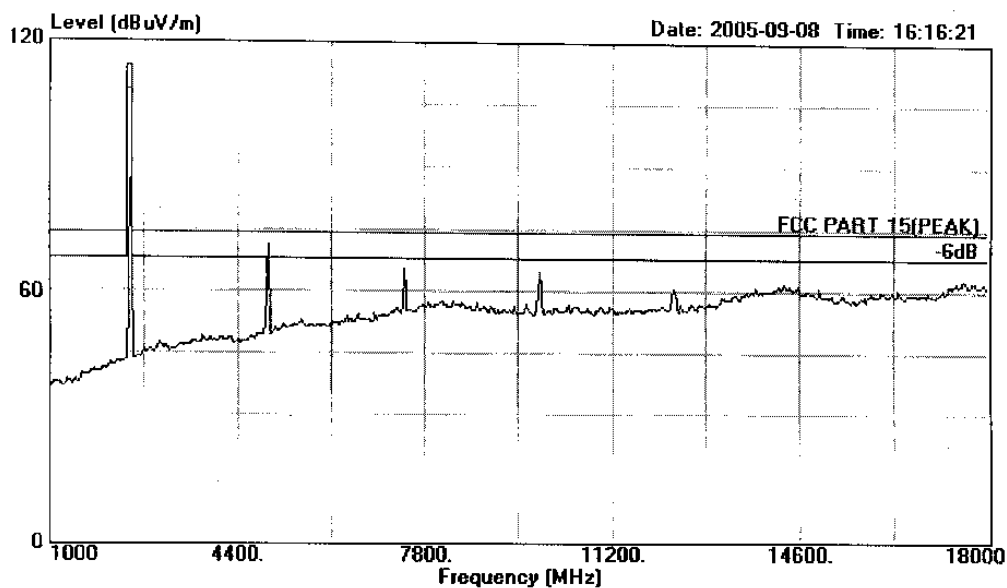

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : TX
Memo : Temp:23' Humi:54%
 : Channel 4




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 17 File#: C:\EMI TEST DATA\S\Shuoying.EMI

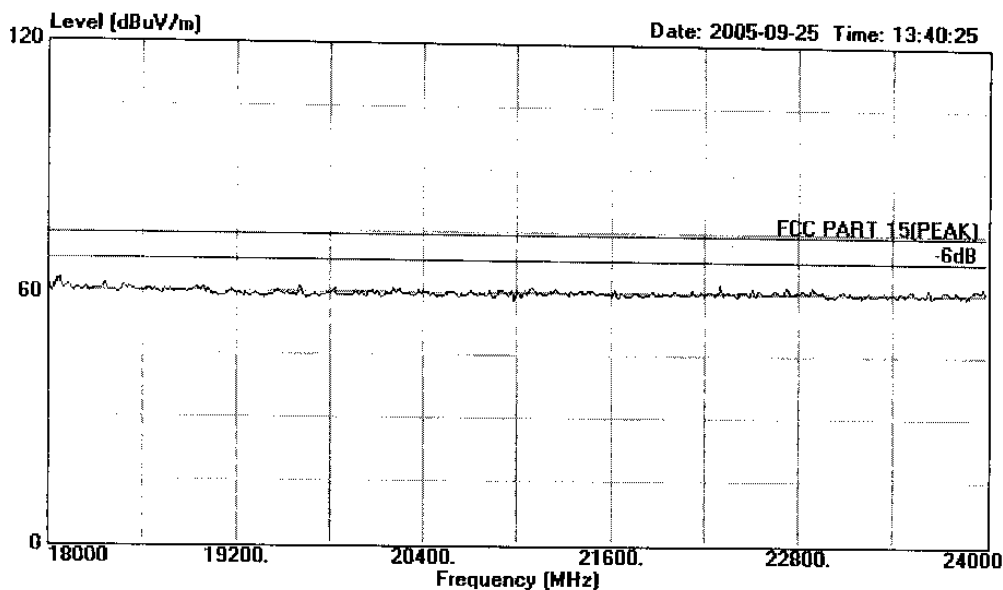

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : Temp:23' Humi:54%
Memo : TX
: Channel 1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 18 File#: C:\EMI TEST DATA\S\Shuoying.EMI

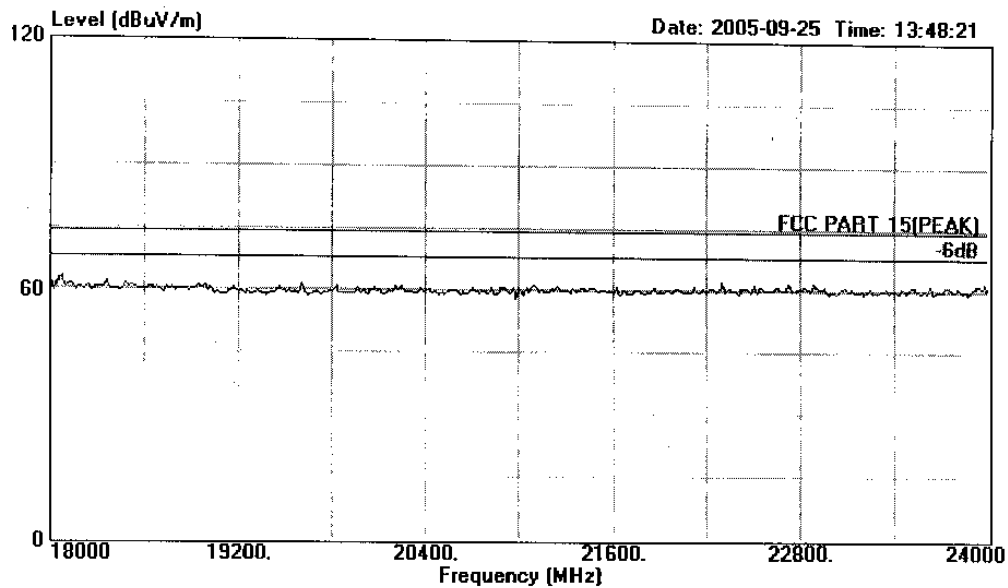

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : Temp:23' Humi:54%
Memo : TX
: Channel 1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 19 File#: C:\EMI TEST DATA\S\Shuoying.EMI

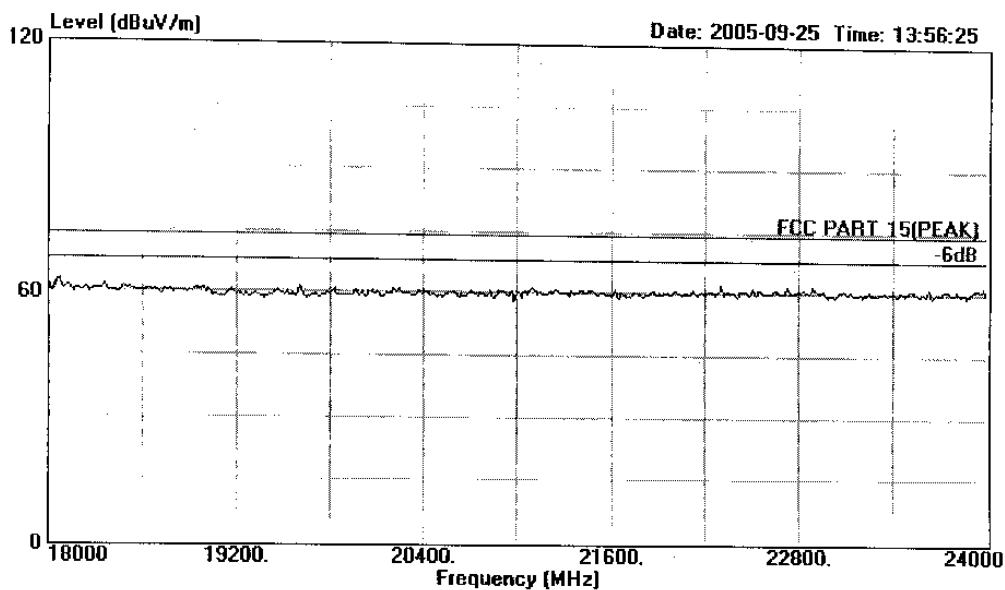

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : Temp:23' Humi:54%
Memo : TX
: Channel 2




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 20 File#: C:\EMI TEST DATA\S\Shuoying.EMI

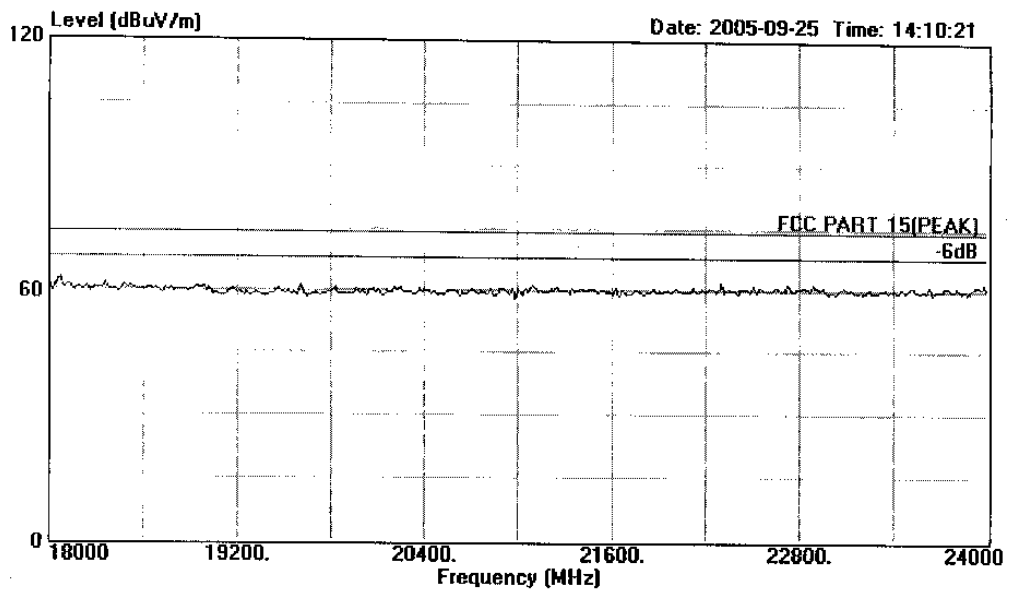

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : Temp:23° Humi:54%
Memo : TX
.: Channel 2




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 21 File#: C:\EMI TEST DATA\S\Shuoying.EMI

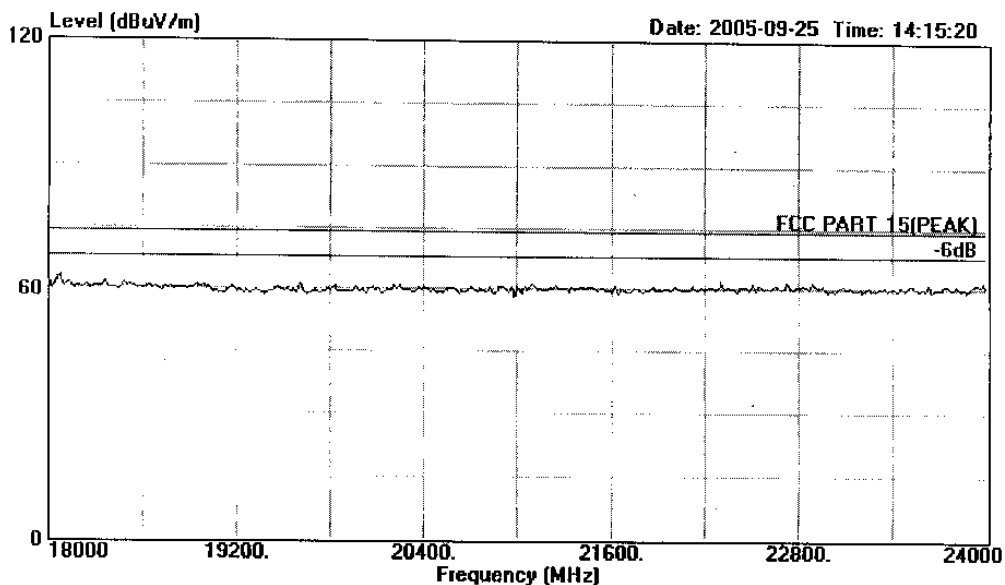

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : Temp:23' Humi:54%
Memo : TX
: Channel 3




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 22 File#: C:\EMI TEST DATA\S\Shuoying.EMI

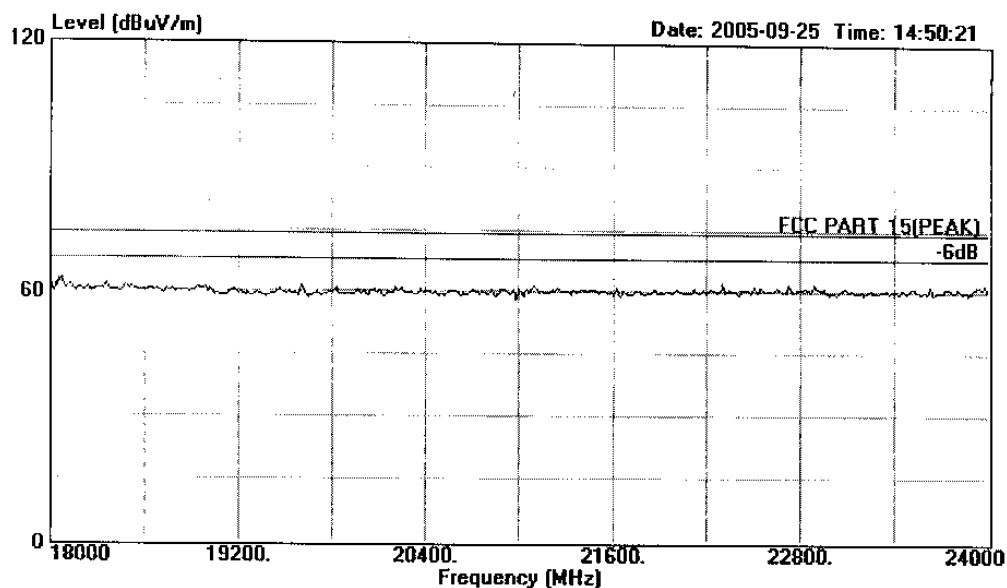

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : Temp:23' Humi:54%
Memo : TX
.: Channel 3




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 23 File#: C:\EMI TEST DATA\S\Shuoying.EMI

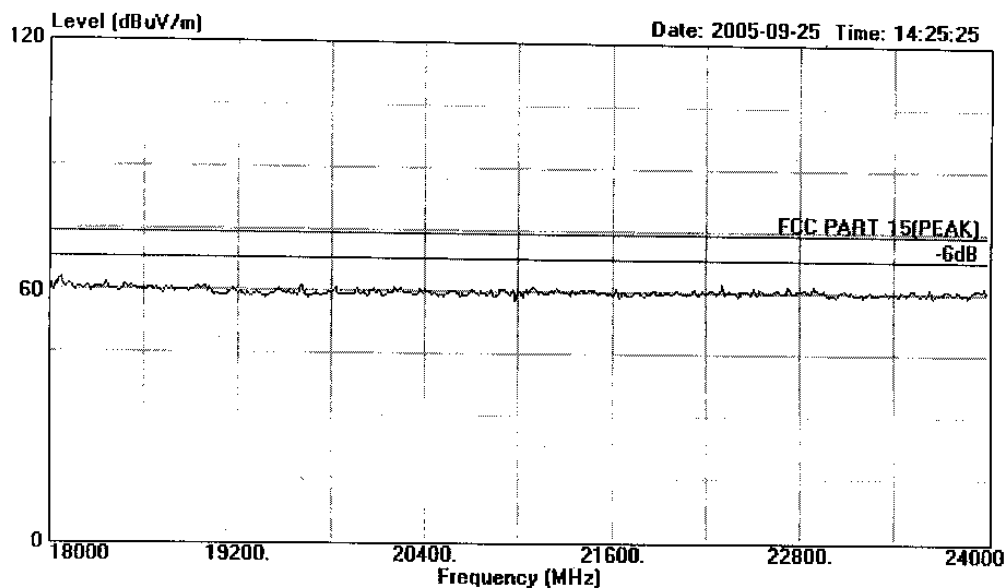

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : Temp:23' Humi:54%
Memo : TX
.: Channel 4




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 24 File#: C:\EMI TEST DATA\S\Shuoying.EMI

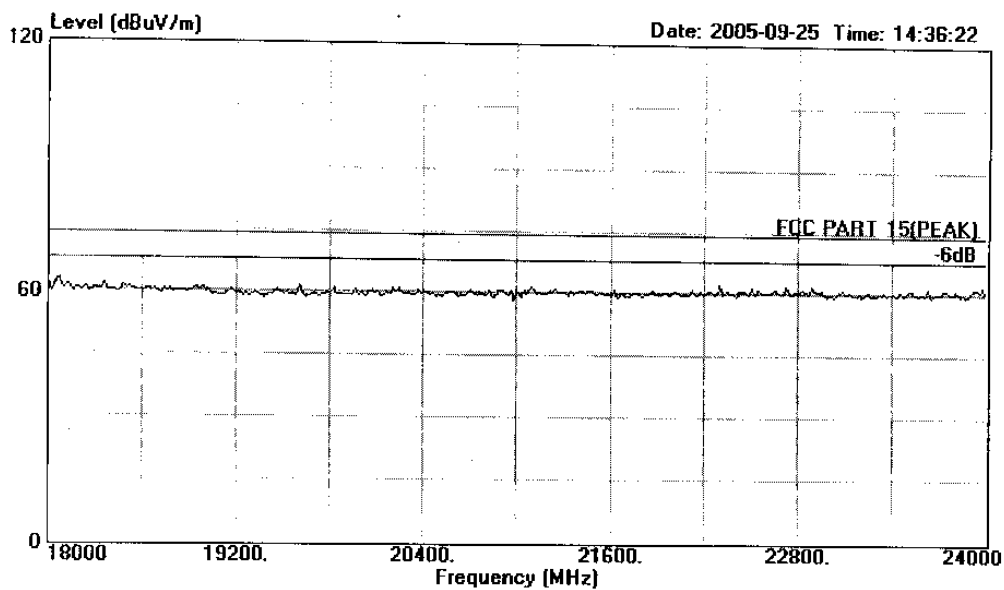

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless Baby Monitor
M/N : SY-172
Power : DC 9V Adaptor Input AC 120V/60Hz
Test Engineer : Seco
Op Condition : Temp:23° Humi:54%
Memo : TX
.: Channel 4