




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	8/25/2004 11:14:06 AM	DUT Battery Model/No:	
Filename:	lefttch885_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Tresor T503f	Relative Permittivity:	39.42
Relative Humidity:	50%	Conductivity:	1.433
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-53.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-173.20 mm
Antenna Configuration:	Integral	Max E Field:	23.92 V/m
Test Frequency:	1880MHz	SAR 1g:	0.772 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.439 W/kg
Conversion Factors:	0.423 / 0.423 / 0.423	SAR Start:	0.293 W/kg
Type of Modulation:		SAR End:	0.294 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	7/22/2004
Input Power Level:	max	Extrapolation:	poly4

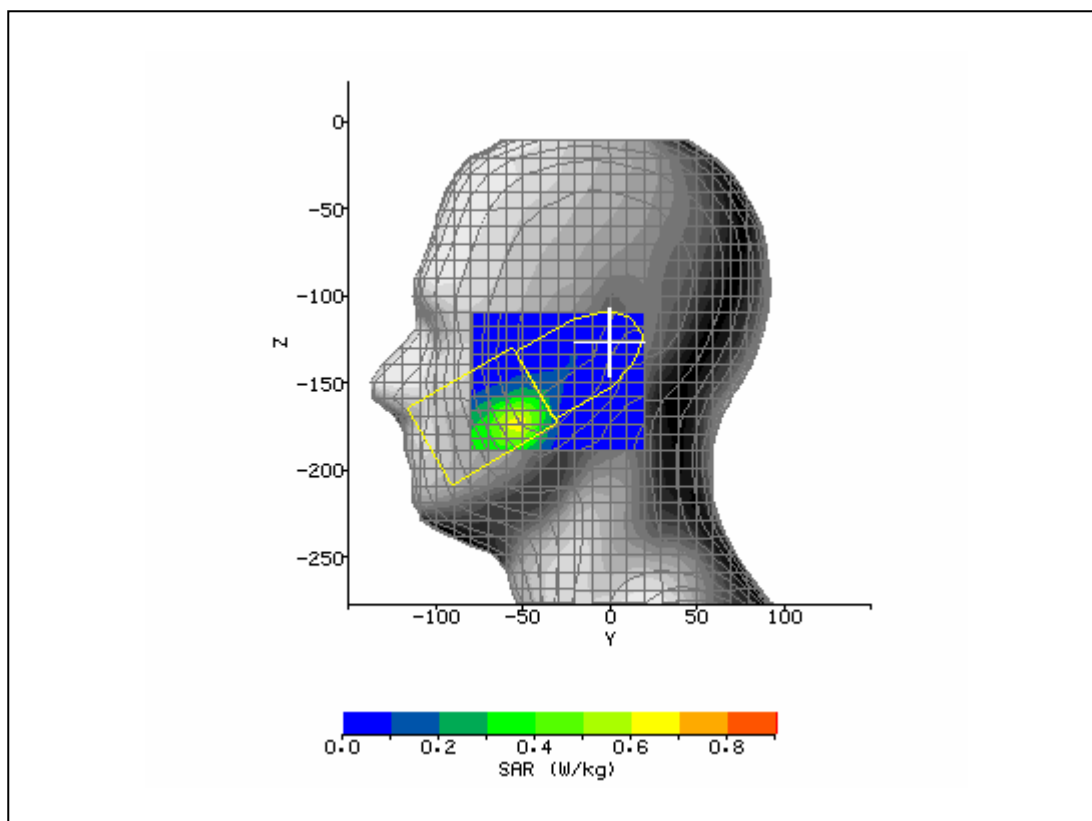


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	8/25/2004 11:44:05 AM	DUT Battery Model/No:	
Filename:	lefttch661_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Tresor T503f	Relative Permittivity:	39.42
Relative Humidity:	50%	Conductivity:	1.433
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-13.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-131.60 mm
Antenna Configuration:	Integral	Max E Field:	10.90 V/m
Test Frequency:	1880MHz	SAR 1g:	0.148 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.088 W/kg
Conversion Factors:	0.423 / 0.423 / 0.423	SAR Start:	0.052 W/kg
Type of Modulation:		SAR End:	0.052 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.02 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	7/22/2004
Input Power Level:	max	Extrapolation:	poly4

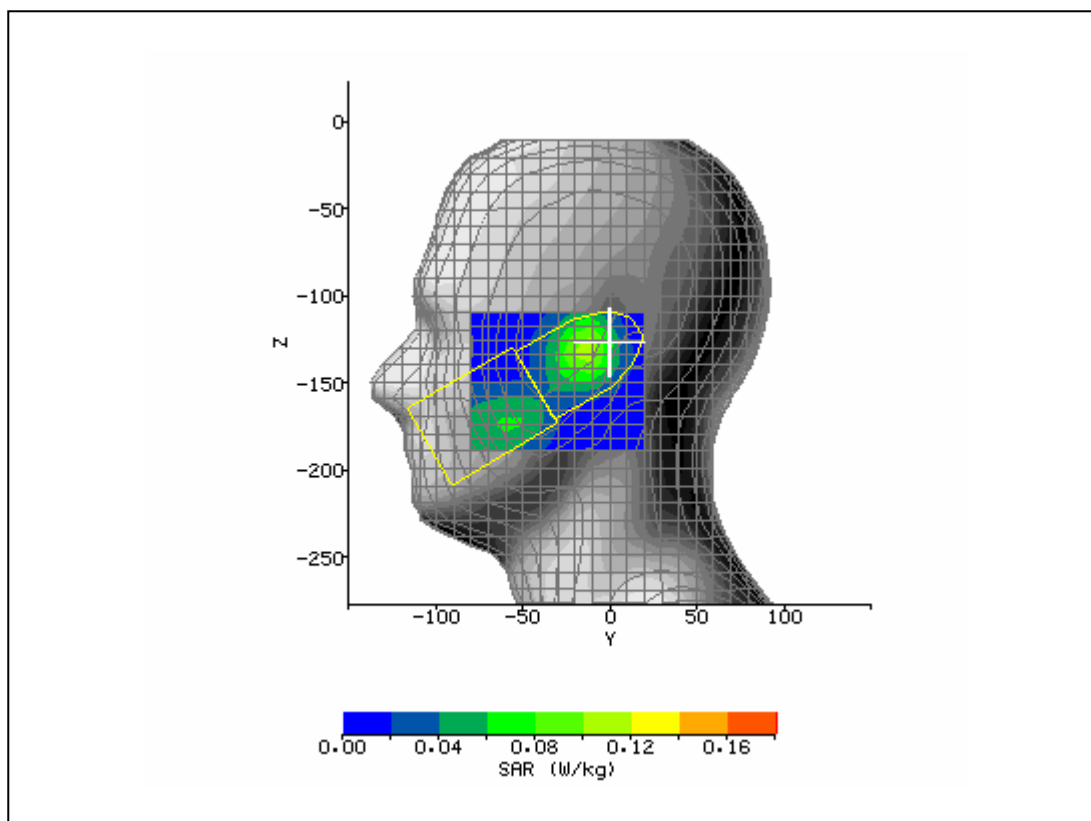


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	8/25/2004 12:15:55 PM	DUT Battery Model/No:	
Filename:	lefttlt661_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Tresor T503f	Relative Permittivity:	39.42
Relative Humidity:	50%	Conductivity:	1.433
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	65.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-156.40 mm
Antenna Configuration:	Integral	Max E Field:	18.25 V/m
Test Frequency:	1880MHz	SAR 1g:	0.438 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.273 W/kg
Conversion Factors:	0.423 / 0.423 / 0.423	SAR Start:	0.150 W/kg
Type of Modulation:		SAR End:	0.151 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	7/22/2004
Input Power Level:	max	Extrapolation:	poly4

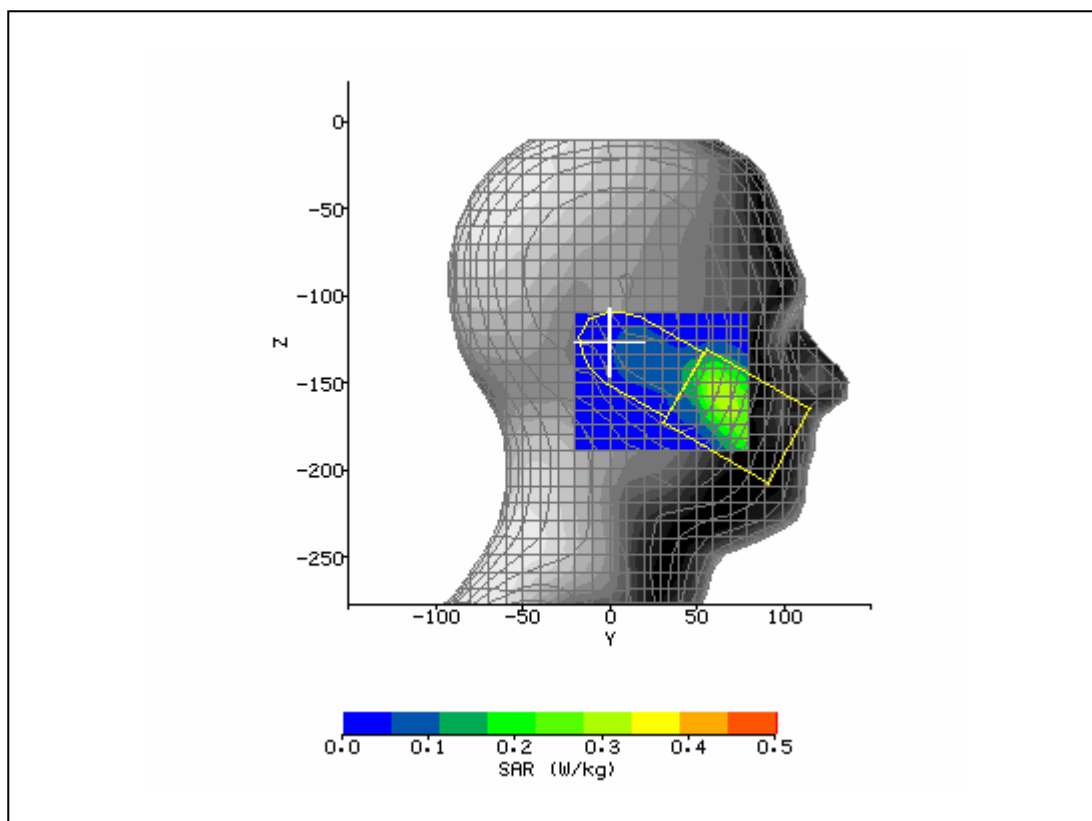


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	8/26/2004 4:23:39 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Tresor T503f	Relative Permittivity:	39.42
Relative Humidity:	50%	Conductivity:	1.433
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	13.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-129.20 mm
Antenna Configuration:	Integral	Max E Field:	10.23 V/m
Test Frequency:	1880MHz	SAR 1g:	0.123 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.073 W/kg
Conversion Factors:	0.423 / 0.423 / 0.423	SAR Start:	0.047 W/kg
Type of Modulation:		SAR End:	0.046 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.06 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	7/22/2004
Input Power Level:	max	Extrapolation:	poly4

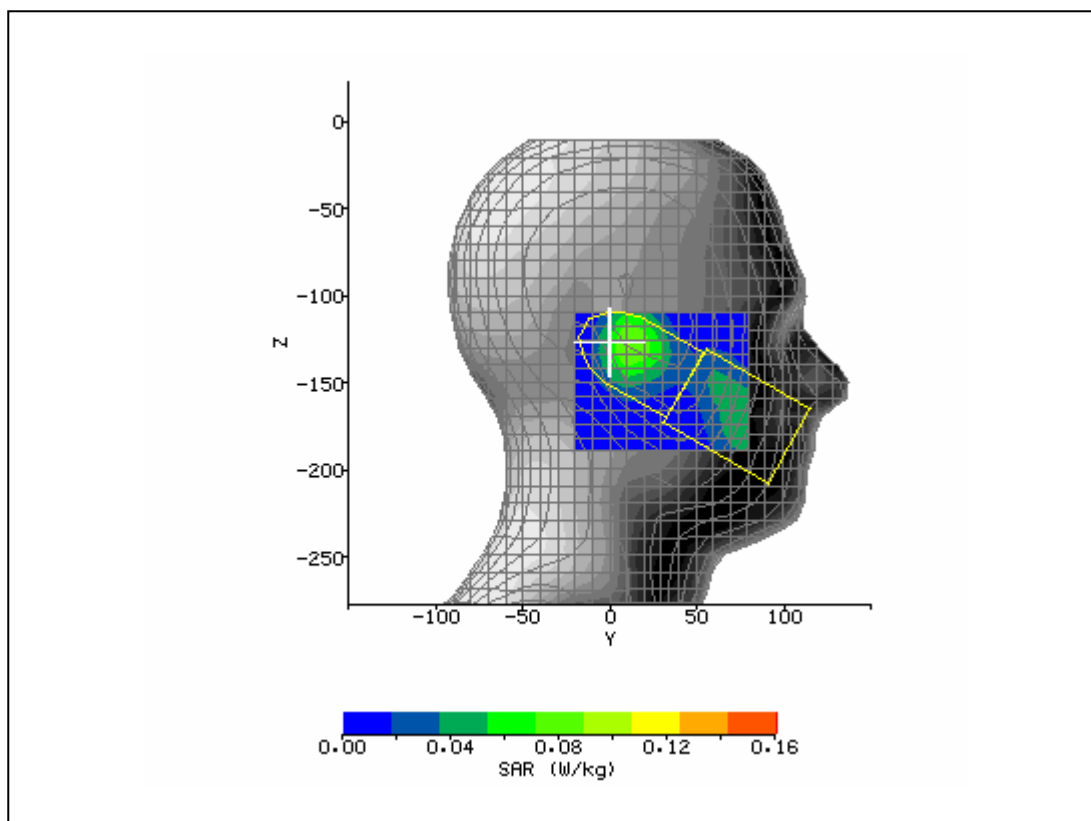


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	8/26/2004 4:55:25 PM	DUT Battery Model/No:	
Filename:	righttlt661_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Tresor T503f	Relative Permittivity:	39.68
Relative Humidity:	50%	Conductivity:	1.413
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-50.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-175.60 mm
Antenna Configuration:	Integral	Max E Field:	22.43 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.642 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.389 W/kg
Conversion Factors:	0.423 / 0.423 / 0.423	SAR Start:	0.259 W/kg
Type of Modulation:		SAR End:	0.258 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.02 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	7/22/2004
Input Power Level:	max	Extrapolation:	poly4

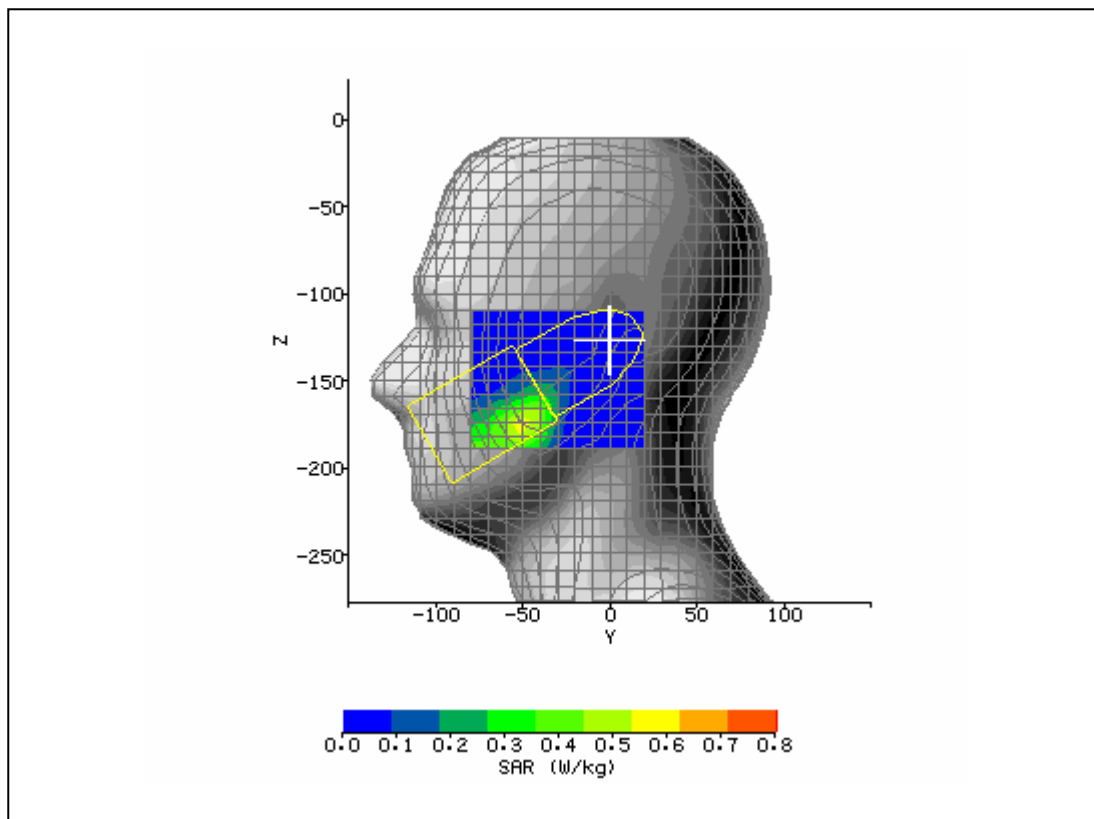


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	8/26/2004 5:24:27 PM	DUT Battery Model/No:	
Filename:	lefttch512_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Tresor T503f	Relative Permittivity:	39.18
Relative Humidity:	50%	Conductivity:	1.462
Phantom S/No:	HeadFT26.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-50.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-175.60 mm
Antenna Configuration:	Integral	Max E Field:	28.11 V/m
Test Frequency:	1909.8MHz	SAR 1g:	1.047 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.623 W/kg
Conversion Factors:	0.423 / 0.423 / 0.423	SAR Start:	0.402 W/kg
Type of Modulation:		SAR End:	0.406 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.04 dB
Diode Compression Factors (V*200):	9.4 / 2.7 / 7.8	Probe battery last changed:	7/22/2004
Input Power Level:	max	Extrapolation:	poly4

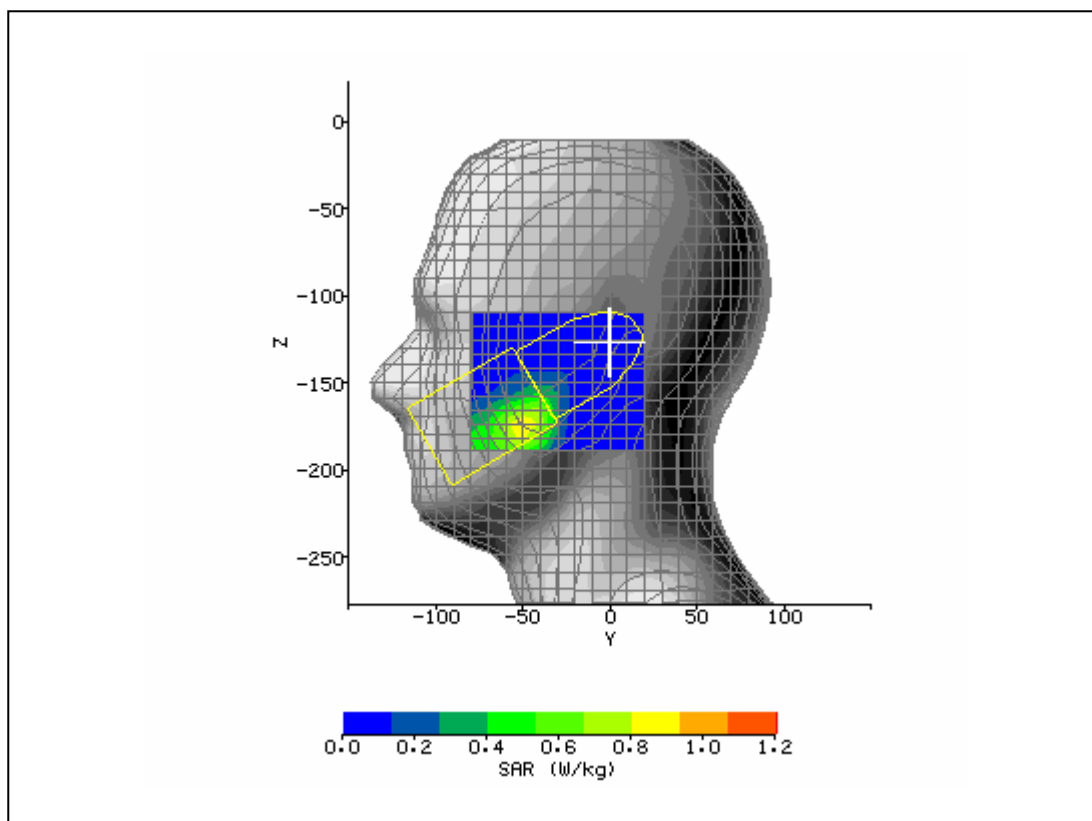

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	9/9/2004 1:28:44 PM	DUT Battery Model/No:	
Filename:	ambient_Host_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Tresor T503F	Relative Permittivity:	53.42
Relative Humidity:	50%	Conductivity:	1.532
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-35.00 mm
DUT Position:	back of phone 1.5 cm from phantom	Max SAR Z-axis Location:	-160.40 mm
Antenna Configuration:	Integral	Max E Field:	18.59 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.457 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.315 W/kg
Conversion Factors:	0.477 / 0.477 / 0.477	SAR Start:	0.209 W/kg
Type of Modulation:		SAR End:	0.210 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	12.81 / 5.68 / 11.4	Probe battery last changed:	7/22/2004
Input Power Level:	maximum 2 timeslots TX	Extrapolation:	poly4

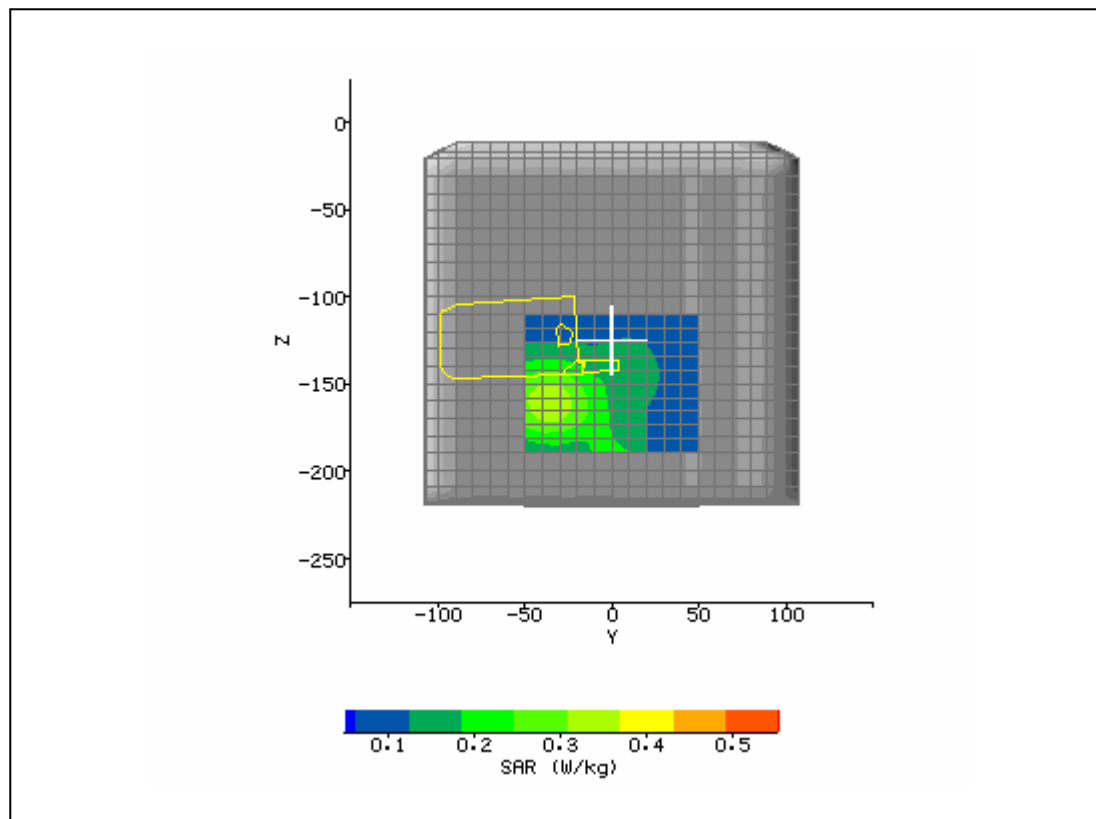

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	9/9/2004 2:30:15 PM	DUT Battery Model/No:	
Filename:	512_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Tresor T503F	Relative Permittivity:	53.26
Relative Humidity:	50%	Conductivity:	1.541
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-37.00 mm
DUT Position:	back of phone 1.5 cm from phantom	Max SAR Z-axis Location:	-160.40 mm
Antenna Configuration:	Integral	Max E Field:	18.09 V/m
Test Frequency:	1880MHz	SAR 1g:	0.441 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.305 W/kg
Conversion Factors:	0.477 / 0.477 / 0.477	SAR Start:	0.202 W/kg
Type of Modulation:		SAR End:	0.203 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	12.81 / 5.68 / 11.4	Probe battery last changed:	7/22/2004
Input Power Level:	maximum 2 timeslots TX	Extrapolation:	poly4

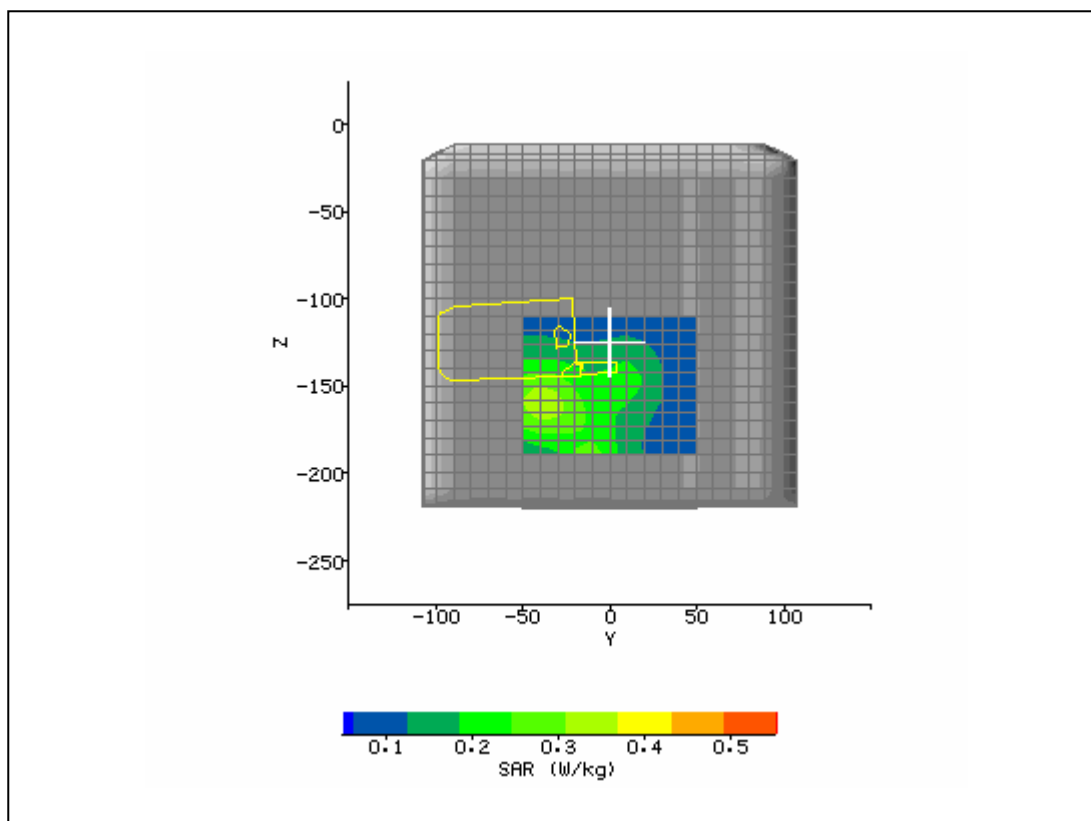

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	9/9/2004 3:00:47 PM	DUT Battery Model/No:	
Filename:	661_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Tresor T503F	Relative Permittivity:	53.06
Relative Humidity:	50%	Conductivity:	1.549
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-38.00 mm
DUT Position:	back of phone 1.5 cm from phantom	Max SAR Z-axis Location:	-160.40 mm
Antenna Configuration:	Integral	Max E Field:	20.08 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.517 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.345 W/kg
Conversion Factors:	0.477 / 0.477 / 0.477	SAR Start:	0.237 W/kg
Type of Modulation:		SAR End:	0.237 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	12.81 / 5.68 / 11.4	Probe battery last changed:	7/22/2004
Input Power Level:	maximum 2 timeslots TX	Extrapolation:	poly4

