

DATE: 15 December 2009

I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
for
The Sapling Company, Inc.

Equipment under test:

ERS Bath Station

VS-600-WC

Written by: E. Ever

E. Ever, Documentation

Approved by: E. Ever

E. Ever, Test Engineer

Approved by: I. Raz

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for The Sapling Company, Inc.

ERS Bath Station

VS-600-WC

FCC ID: R73ERS003

IC ID: 6116A-ERS003

17 December 2009

This report concerns: Original Grant: x
 Class I change:
 Class II change:

Equipment type: Part 15 Security/Remote Control Transceiver

47CFR15 Section 15.231 (a-d)

Measurement procedure used is ANSI C63.4-2003.

Application for Certification
prepared by:
Ishaishou Raz
ITL (Product Testing) Ltd.
Kfar Bin Nun
D.N. Shimshon 99780
Israel
e-mail Sraz@itl.co.il

Applicant for this device:
(different from "prepared by")
Ilan Shemesh
The Sapling Company
451 Veit Road
Huntington Valley, PA 19006
U.S.A.
Tel: +1-215-322-6063
Fax: +1-215-322-8498
e-mail: Ilan@Sapling-Inc.com

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 Administrative Information.....	5
1.2 List of Accreditations	6
1.3 Product Description	7
1.4 Test Methodology.....	7
1.5 Test Facility	7
1.6 Measurement Uncertainty	7
2. SYSTEM TEST CONFIGURATION	8
2.1 Justification.....	8
2.2 EUT Exercise Software	8
2.3 Special Accessories	8
2.4 Equipment Modifications	8
2.5 Configuration of Tested System.....	9
3. TEST SET-UP PHOTOS	10
4. AVERAGE FACTOR CALCULATION	11
4.1 Test Instrumentation Used	13
5. PERIODIC OPERATION	14
5.1 Specification	14
5.2 Requirements	14
5.3 Results.....	14
5.1 Test Instrumentation Used	17
6. FIELD STRENGTH OF FUNDAMENTAL	18
6.1 Test Specification	18
6.2 Test Procedure.....	18
6.3 Measured Data.....	18
6.4 Test Instrumentation Used, Field Strength of Fundamental	22
7. SPURIOUS RADIATED EMISSION, 9 KHZ – 30 MHZ	23
7.1 Test Specification	23
7.2 Test Procedure	23
7.3 Measured Data.....	23
7.4 Test Instrumentation Used, Radiated Measurements	24
7.5 Field Strength Calculation	25
8. SPURIOUS RADIATED EMISSION, 30 – 9200 MHZ	26
8.1 Test Specification	26
8.2 Test Procedure.....	26
8.3 Test Data.....	27
8.4 Test Instrumentation Used	28
9. BANDWIDTH	29
9.1 Test procedure	29
9.2 Results table.....	30
9.3 Test Equipment Used.....	31
10. FCC/IC CROSS CORRELATION TABLE	32

11. APPENDIX A - CORRECTION FACTORS -----	33
11.1 Correction factors for CABLE	33
11.2 Correction factors for CABLE	34
11.3 Correction factors for CABLE	35
12.6 Correction factors for LOG PERIODIC ANTENNA	36
11.4 Correction factors for LOG PERIODIC ANTENNA	37
11.5 Correction factors for BICONICAL ANTENNA.....	38
11.6 Correction factors for Double-Ridged Waveguide Horn	39
11.7 Correction factors for Horn Antenna	40
11.8 Correction factors for Horn Antenna	41
11.9 Correction factors for ACTIVE LOOP ANTENNA	42

1. General Information

1.1 Administrative Information

Manufacturer: The Sapling Company, Inc.

Manufacturer's Address: 65 Weizman St.
Givatayim
Israel 53468
Tel: +972-3-573-1801
Fax: +972- 3-573-1807

Manufacturer's Representative: Rafy Regev

Equipment Under Test (E.U.T): ERS Bath Station

Equipment Model No.: VS-600-WC

Equipment Serial No.: Not Designated

Date of Receipt of E.U.T: 24.08.2009

Start of Test: 14.09.2009

End of Test: 30.10.2009

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: FCC Part 15 Sub-part C

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 *Product Description*

The ERS Bath Station offers the user the flexibility of being able to position a ERS Bath Station anywhere in the room. This makes it ideal for strategically positioning near furniture or in a bathroom or shower. It makes it a cost effective "Add on" to the system without costly installation or wiring upgrades. Calls are initiated by pulling on the nylon pull cord. A call assurance LED illuminates briefly and a soft tone sounds at the Station to confirm the Placement of the call. The call can be canceled at the Station by pressing a cancel button.

An illuminated LED and a tone at the Station confirm the cancellation of the call. The Wireless Pull Cord Station is suitable for surface mounting directly to a wall. No back box or special mounting hardware is required.

1.4 *Test Methodology*

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 *Test Facility*

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing August 22, 2006).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 *Measurement Uncertainty*

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 ***Justification***

Radiated testing was performed in the normal wall-mounted position of the EUT, as shown in the Open Area Test Site configuration.

2.2 ***EUT Exercise Software***

Standard system software was used to test the EUT.

2.3 ***Special Accessories***

No special accessories were needed.

2.4 ***Equipment Modifications***

No modifications were needed in order to achieve compliance

2.5 Configuration of Tested System

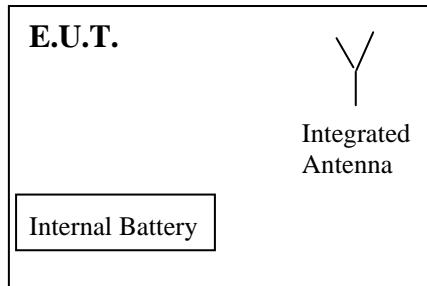


Figure 1. Configuration of Tested System

3. Test Set-up Photos



Figure 2. Open Site Radiated Emission Test



Figure 3. Timing and Periodic Operation Testing


4. Average Factor Calculation

1. Transmission pulse duration = 650.0 usec

2. Transmission pulse period = 1.65 msec

3. Burst duration = 43.25 msec

4. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$

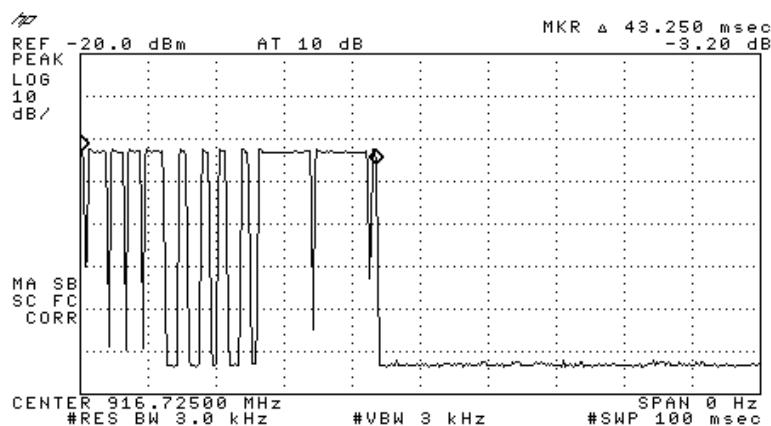

$$\text{Average Factor} = 20 \log \left[\frac{0.650}{1.65} \times \frac{43.25}{100} \times 1 \right] = -15.37 dB$$

Figure 4. Burst duration = 43.25 msec (in 100 msec)

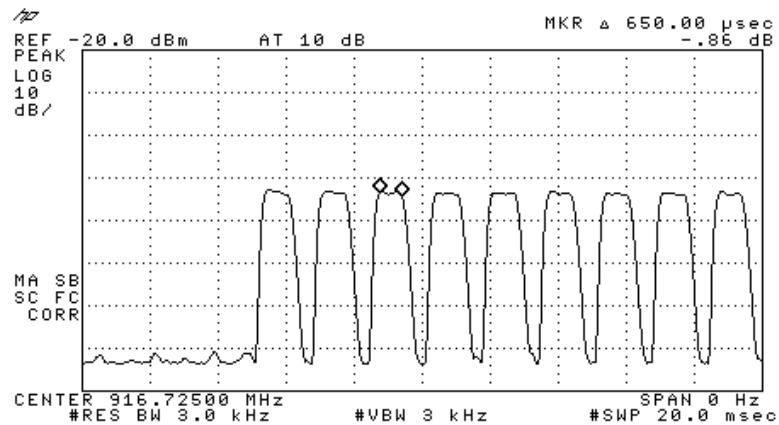


Figure 5. Transmission pulse duration = 650 usec

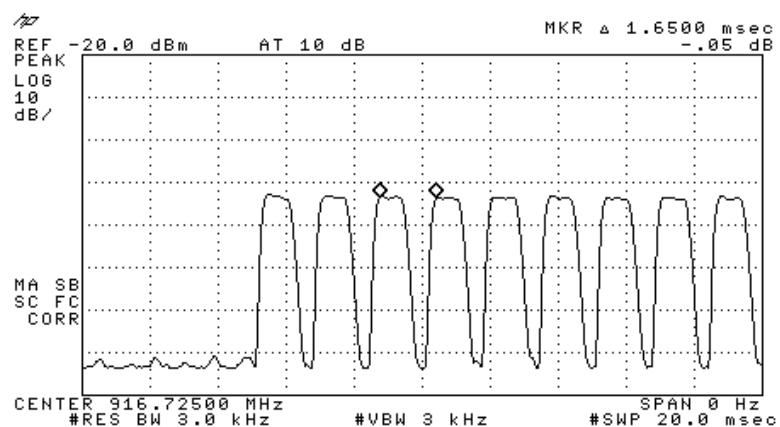


Figure 6. Transmission Pulse Period = 1.65 msec

4.1 **Test Instrumentation Used**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year

5. Periodic Operation

5.1 Specification

F.C.C., Part 15, Subpart C, Section 15.231(a)

5.2 Requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted.	N/A	Complies
A manually operated transmitter shall be deactivated within not more than 5 seconds after releasing the switch.	See plots in Figure 7 to Figure 8	Complies
An automatically operated transmitter shall cease operation within 5 seconds after activation.	N/A	Complies
Periodic transmissions at regular predetermined intervals are not permitted.	N/A	Complies
Polling or supervised transmissions to determine system integrity of transmitter used in security or safety applications shall not exceed more than 2 seconds per hour.	See plots in Figure 7 to Figure 8	Complies

5.3 Results

JUDGEMENT: Passed

The EUT met the FCC Part 15, Subpart C, Section 15.231(a) specification requirements.

TEST PERSONNEL:

Tester Signature: Evan Ever Date: 15.12.09

Typed/Printed Name: E. Ever

Periodic Operation

E.U.T Description ERS Bath Station
Type VS-600-WC
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

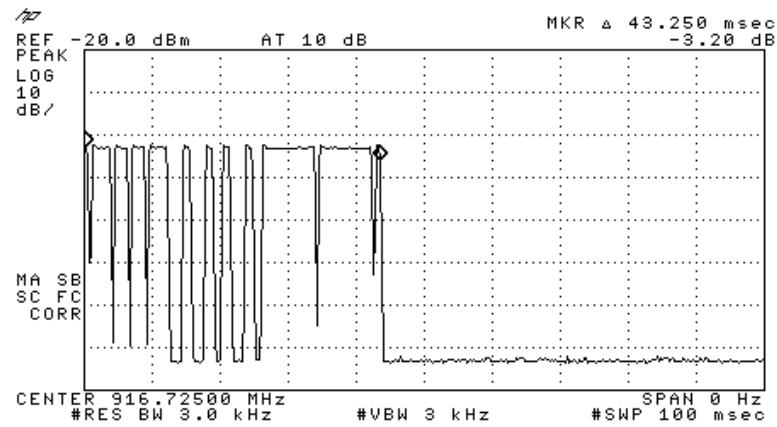


Figure 7. System Integrity Pulse Width (1 transmission 43.250 msec.)

Periodic Operation

E.U.T Description ERS Bath Station
Type VS-600-WC
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

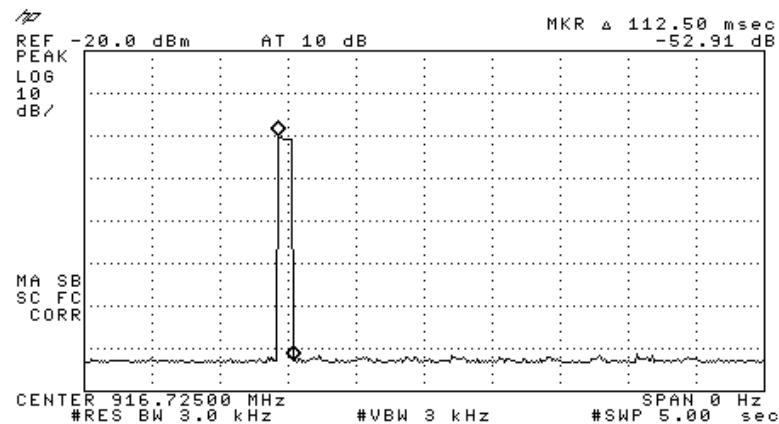


Figure 8. Unit transmission within 5 seconds

5.1 **Test Instrumentation Used**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year

6. Field Strength of Fundamental

6.1 **Test Specification**

F.C.C., Part 15, Subpart C, Section 15.231(b)

6.2 **Test Procedure**

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (916.74 MHz) and Peak Detection.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.

The average result is:

Peak Level(dB μ V/m) + E.U.T. Duty Cycle Factor, in 100msec time window (dB)

6.3 **Measured Data**

JUDGEMENT: Passed by 14 dB

The EUT met the FCC Part 15, Subpart C, Section 15.231(b) specification requirements.

The details of the highest emissions are given in Figure 9 to Figure 11.

TEST PERSONNEL:

Tester Signature: Evan Ever Date: 15.12.09

Typed/Printed Name: E. Ever

Field Strength of Fundamental

E.U.T Description ERS Bath Station
Type VS-600-WC
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

Freq.	Pol.	Peak Amp	Average Factor	AVG Result	AVG Specification	Margin
(MHz)	V/H	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
916.58	H	80.8	-15.4	65.4	81.9	-16.5
916.58	V	83.3	-15.4	67.9	81.9	-14.0

Figure 9. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL. Detector: Peak

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. “Peak Amp.” (dB μ V/m) included the “Correction Factors”.
3. “Correction Factors” (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. “Average Factor = $20 \log [(burst\ duration/100msec) * Num\ of\ burst\ within\ 100msec]$ ” = $20 \log [(0.650/1.65) * (43.25/100) * 1]$ = -15.4 dB
5. “Average Result” (dB μ V/m)=Peak Amp. (dB μ V/m)+D.C.F. (dB)

Field Strength of Fundamental

E.U.T Description ERS Bath Station
 Type VS-600-WC
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

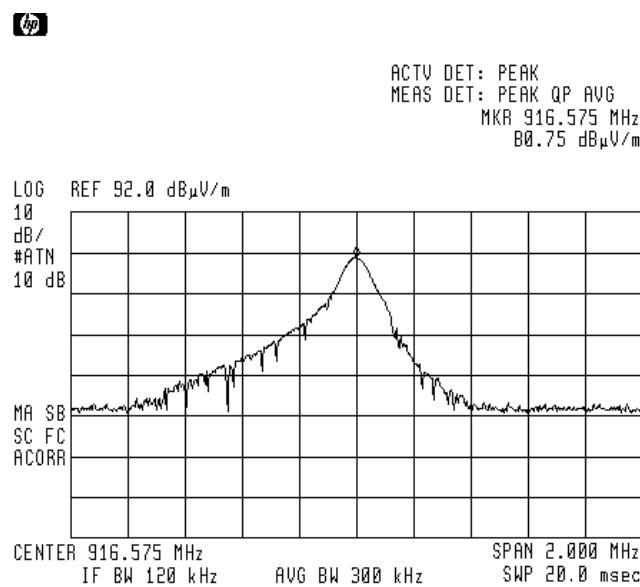


Figure 10. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL. Detectors: Peak, Quasi-peak, Average

Field Strength of Fundamental


E.U.T Description ERS Bath Station
 Type VS-600-WC
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Vertical

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

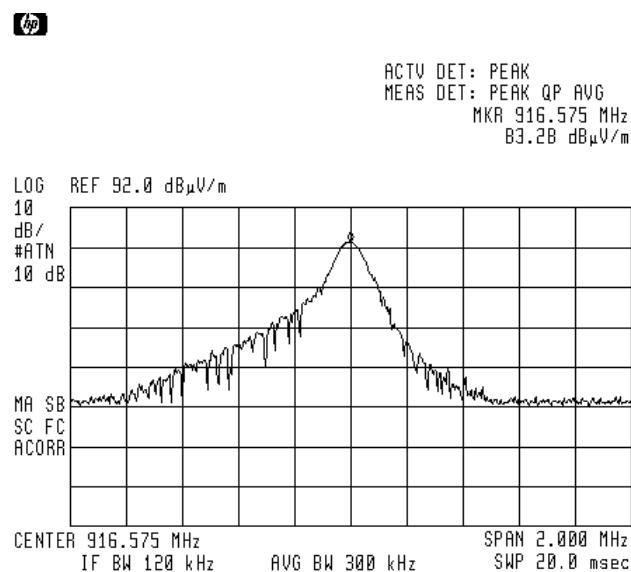

**Figure 11. Field Strength of Fundamental. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak, Average**

6.4 **Test Instrumentation Used, Field Strength of Fundamental**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 3, 2008	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 17, 2009	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	March 25, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 06, 2008	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

7. Spurious Radiated Emission, 9 kHz – 30 MHz

7.1 ***Test Specification***

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

7.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 10 meters.

7.3 ***Measured Data***

JUDGEMENT: Passed

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C, specification.

No emissions from the EUT were found in this frequency range.

TEST PERSONNEL:

Tester Signature: Evan Ever Date: 15.12.09

Typed/Printed Name: E. Ever

7.4 **Test Instrumentation Used, Radiated Measurements**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 15, 2008	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

7.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]

RA: Receiver Amplitude [dB μ V]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

8. Spurious Radiated Emission, 30 – 9200 MHz

8.1 ***Test Specification***

30 - 9200 MHz, F.C.C., Part 15, Subpart C

8.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test. A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 2*.

The signals from the list of the highest emissions were verified and the list was updated accordingly. The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 – 9.2 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.

8.3 **Test Data**

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

All spurious emissions were below the noise floor.

TEST PERSONNEL:

Tester Signature: Evan Ever Date: 15.12.09

Typed/Printed Name: E. Ever

8.4 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 3, 2008	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 17, 2009	1 Year
Antenna Bi-conical	ARA	BCD 235/B	1041	March 25, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 06, 2008	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

9. Bandwidth

9.1 Test procedure

The transmitter unit operated with normal modulation. The spectrum analyzer was set to 30 kHz resolution BW and center frequency of the transmitter fundamental. The spectrum bandwidth of the transmitter unit was measured and recorded. The BW was measured at 20 dBc points. The EUT was setup as shown in *Figure 2* and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on the modulation envelope.

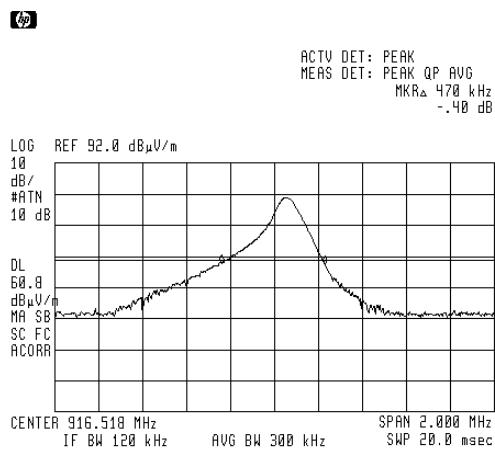


Figure 12: Bandwidth Result

9.2 Results table

E.U.T Description: ERS Bath Station

Model: VS-600-WC

Serial Number: Not Designated

Specification: F.C.C. Part 15, Subpart C: (15.231(c))

Bandwidth Reading (kHz)	Specification (1) (kHz)	Margin (kHz)
470	2290	1820

Figure 13 Bandwidth

JUDGEMENT: Passed by 1820 kHz

TEST PERSONNEL:

Tester Signature: Evan Ever Date: 15.12.09

Typed/Printed Name: E. Ever

(1) 0.25% of the E.U.T. fundamental frequency, Section 15.231(c).

9.3 **Test Equipment Used.**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 06, 2008	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

Figure 14 Test Equipment Used

10. FCC/IC Cross Correlation Table

EUT	FCC Specification	According FCC Standard	IC Standard
VS-600-WC	Periodic Operation	FCC Part 15.231 (a)(1-5)	RSS- 210 Section 2.6 Annex 1, A1.1.1
	Field Strength at Fundamental	FCC Part 15.231 (b)	RSS- 210 Annex 1 A1.1.2, Section 2.6
	Spurious Emissions	FCC Part 15.231 (b)	RSS- 210 Section 2.6 Annex 1 A1.1.2
	Bandwidth	FCC Part 15.231 (c)	RSS- 210 Section 2.6 Annex 1 A1.1.3

11. APPENDIX A - CORRECTION FACTORS

11.1 **Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

11.2 Correction factors for

CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

11.3 Correction factors for

CABLE from spectrum analyzer to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

12.6 Correction factors for LOG PERIODIC ANTENNA

Type LPD 2010/A
at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".

11.4 Correction factors for

LOG PERIODIC ANTENNA

Type SAS-200/511
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

11.5 Correction factors for

BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

11.6 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENN A Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			

11.7 Correction factors for

Horn Antenna

**Model: SWH-28
at 1 meter range.**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

11.8 Correction factors for

Horn Antenna Model: V637

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0

11.9 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2