



FCC Part 15, Subpart C, Section 15.247

Test Report

On

**FHSS Transceiver Module
FCC ID: R73MOD-24G-1**

Customer Name: The Sapling Company, Inc.

Customer P.O: 0012785

Date of Report: November 4, 2013

Date of Revision: November 8, 2013

Test Report No: R-1861P-3, Rev A

Test Start Date: April 11, 2013

Test Finish Date: April 23, 2013

Test Technician: D. Fiore

Approved By: Richard J. Reitz

Report Prepared By: C. Reitz

Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the general public. This test report shall not be reproduced, except in full, without the written approval of Retlif Testing Laboratories.

Technical Information

Report Number: R-1861P-3, Rev. A

Customer: The Sapling Company, Inc.

Address: 1633 Republic Road
Huntingdon, PA 19006

Manufacturer: The Sapling Company, Inc.

Manufacturer Address: 1633 Republic Road
Huntingdon, PA 19006

Test Sample: FHSS Transceiver Module

Model Number: D-CCA-MOD-24G-1

FCC ID: R73MOD-24G-1
2.433 to 2.449 GHz Frequency Hopping Spread

Type: Spectrum Transceiver

Power Requirements: 3.3 VDC Derived from the Host

Frequency of Operation: 2.433 to 2.449 GHz

Equipment Class: DSS

Equipment Use: Fixed

Test Specification:

FCC Rules and Regulations Part 15, Subpart C, Section 15.247

Test Procedure:

ANSI C63.4:2003

Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems,
FCC: DA 00-705

Test Facility:

Retlif Testing Laboratories
3131 Detwiler Road
Harleysville, PA 19438

FCC Registered Test Site Number: 98314



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Tests Performed

The test methods performed on the FHSS Transceiver Module are shown below. All testing was performed with the Transceiver Module installed in a representative host.

Table 1 - Test Methods Performed

FCC Part 15, Subpart C	Test Method
15.247(a)(1)	Channel Separation
15.247(a)(1)	20 dB Bandwidth
15.247(a)(1)(iii)	Number of Channels and Occupancy Time
15.247(b)(1) and (4)	Peak Conducted Output Power - Alternate Procedure
15.247(d)	Spurious Radiated Emissions, 30 kHz to 25 GHz
15.247(d)	Spurious RF Conducted, 30 MHz to 25 GHz - Alternate Procedure
15.207(a)	Conducted Emissions, Power Leads, 150 kHz to 30 MHz



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Certification and Signatures

We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.



Dean Landers
EMC Test Engineer



Richard J. Reitz
Corporate Laboratory Manager
iNARTE Certified Engineer ATL-0036-E
NVLAP Approved Signatory

Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Requirements and Test Results

Requirement:

FCC Section 15.247 (a)(1)

Channel Separation and 20 dB Bandwidth

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

- **Results:**

The carrier frequencies were separated by 200 kHz which complied with the requirements specified above.

FCC Section 15.247 (a)(1)(iii)

Number of Channels and Occupancy Time

Frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

- The test sample utilized 76 channels. The average Time of Occupancy was not greater than 0.4 seconds with a period of 30 seconds.



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Requirements and Test Results (con't)

FCC Section 15.247 (b)(1) and (4)

Peak Conducted Output Power

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(4) The conducted output power limit specified in Paragraph (b) of Section 15.247 is based on the use of antenna with directional gains that do not exceed 6 dBi. Except as shown in Paragraph (c) of Section 15.247, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in Paragraph (b)(1), (b)(2) and (b)(3) of Section 15.247, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

- **Results**

The frequency hopping system utilized a transmitting antenna with a directional gain of 3.3 dBi therefore, the peak output power limit was 1 watt. The maximum peak conducted output power was measured to be 196.0 milliwatts.

FCC Section 15.247(d)

Spurious Emissions

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Paragraph (b)(3) of Section 15.247, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

- **Results**

The antenna conducted spurious emissions comply with the requirement that the radio frequency power be at least 20 dB below the highest in band level.

In addition, Harmonic and Spurious Emissions which were found to be within the restricted bands of operation, as defined in section 15.205(a) were found to be in compliance with the general limits specified in section 15.209(a).



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Requirements and Test Results (con't)

FCC Section 15.247(d)

Field Strength of Spurious Radiation (Restricted Bands)

Radiated Emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

- Results:

The field strength of spurious radiated emissions over the frequency range of 30 kHz to 25 GHz did not exceed the limits of 15.209(a).

Requirement:

FCC Section 15.207(a) - Conducted Limits

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits shown in Table 2, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of the paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Table 2 - Conducted Emission Limits

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

*Decreases due to logarithm of the frequency

- Results:

The conducted emissions observed did not exceed the limits specified in Table 2.



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Requirements and Test Results (con't)

FCC Section 15.247(i)

RF Exposure Limits

Spread Spectrum Transmitters operating under 15.247 are categorically excluded from routine environmental evaluation for demonstrating RF exposure compliance with respect to MPE or SAR limits however per 15.247(i) must be operated in a manner that ensures the public is not exposed to RF energy levels in excess of the commission's guidelines. The user/installation manual contains the proper cautionary statements and specifies that the device be installed and operated so that a minimum separation distance of 11 cm will be maintained. Based on the transmitter power and maximum antenna gain (see calculation below) the 11 cm separation distance exceeds the calculated distance for acceptable MPE power density levels to meet both the Occupational/Controlled Exposure and the General Population/Uncontrolled Exposure requirements of FCC Part 1.1310. The calculation below uses the more stringent General Population MPE Limits.

$$S = \frac{PG}{4\pi Dsq}$$

D = Minimum Separation Distance in cm

S = Max allowed Power Density in mW/cmsq

Per 1.1310 For the Frequency of 2.4 GHz = 1.0 mW/cm²

Power = Max Power Input to Antenna = 196 mW

Gain = Max Power Gain of Antenna = 3.3 dBi = 2.13

$$1.0 \text{ mW/cm}^2 = \frac{196 \times 2.14}{4 \times (3.14) \times D^2}$$

$$D^2 = \frac{419.44}{12.56 \times 1.0}$$

$$D = \sqrt{33.39} = 5.78 \text{ cm}$$



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Equipment Lists

FCC Section 15.247(a)(1) Channel Separation

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
8100	NARDA	20DB ATTENUATOR	10 kHz-11 GHz	768-20	6/4/2012	6/30/2013
R603	AGILENT / HP	SPECTRUM ANALYZER	100 kHz - 26.5 GHz	E7405A;B	6/18/2012	6/18/2013

FCC Section 15.247(a)(1) 20 dB Bandwidth

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
8100	NARDA	20DB ATTENUATOR	10 kHz-11 GHz	768-20	6/4/2012	6/30/2013
R603	AGILENT / HP	SPECTRUM ANALYZER	100 kHz - 26.5 GHz	E7405A;B	6/18/2012	6/18/2013

FCC Section 15.247(a)(1)(iii) Number of Channels and Occupancy Time

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
8100	NARDA	20DB ATTENUATOR	10 kHz-11 GHz	768-20	6/4/2012	6/30/2013
R603	AGILENT / HP	SPECTRUM ANALYZER	100 kHz - 26.5 GHz	E7405A;B	6/18/2012	6/18/2013

FCC Section 15.247(a)(1) Peak Conducted Output Power

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
8100	NARDA	20DB ATTENUATOR	10 kHz-11 GHz	768-20	6/4/2012	6/30/2013
8329	STACO	AC POWER SOURCE	0 - 140 VAC 9 Amp	E1010VAW	Calibrate Before Use	
R603	AGILENT / HP	SPECTRUM ANALYZER	100 kHz - 26.5 GHz	E7405A;B	6/18/2012	6/18/2013



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Equipment Lists (con't)

FCC Section 15.247(d) / 15.209(a) Field Strength of Spurious Emissions – 30 kHz to 25 GHz

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
713D	MICRO-COAX 50U50U	CABLE ASSEMBLY	3 FT.	UFB311A1-0360-	8/13/2012	8/31/2013
713E	MICRO-COAX 50U50U	CABLE ASSEMBLY	6 FEET	UFB311A1-0720-	8/13/2012	8/31/2013
713F	MICRO-COAX 50U50U	CABLE ASSEMBLY	25 FT	UFB311A1-2400-	8/13/2012	8/31/2013
8018	EMCO ANTENNA	DOUBLE RIDGED GUIDE	1 GHZ - 18 GHZ	3115	5/24/2012	5/31/2013
8071	AGILENT / HP	SPECTRUM ANALYZER	100Hz-2.5 GHz/2-22GH	8566B	6/7/2012	6/30/2013
8072	AGILENT / HP DISPLAY	SPECTRUM ANALYZER		85662A	6/7/2012	6/30/2013
8317	AGILENT / HP	PRE-AMPLIFIER	1-26.5 GHz, 30 dB	8449B	6/7/2012	6/30/2013
3207	EMCO	ACTIVE LOOP ANTENNA	9 kHz to 30 MHz	6502	9/17/2012	9/30/2013
8337	MICROLAB/FXR	HIGH GAIN HORN	18.0 to 26.5 GHz	K638AF		No Calibration Required

FCC Section 15.207(a) Conducted Emissions, Power Leads

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
713	ROHDE & SCHWARZ	EMI TEST RECEIVER	20 Hz - 26.5 GHz	ESIB26	6/8/2012	6/30/2013
8074	GENERAL ELECTRIC	AC POWER SOURCE	120V / 120V	9T51B33G3		Calibrate Before Use
8194	SOLAR ELECTRONICS	LINE IMPEDANCE STABILIZATION NETWORK	10 kHz - 30 MHz	8028-50-TS-24-B	1/14/2013	1/31/2014
8195	SOLAR ELECTRONICS	LINE IMPEDANCE STABILIZATION NETWORK	10 kHz - 30 MHz	8028-50-TS-24-B	1/14/2013	1/31/2014
8276	ELGAR	TRANSFORMER	2.5-13			No Calibration Required
8357	NARDA	10.0DB ATTENUATOR	DC - 11 GHz, 20 W	768-10	6/5/2012	6/30/2013
8457	GENERAL TECHNICS	Control Computer				



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

FCC Section 15.247(a)(1)
Channel Separation

Test Data



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Agilent 09:38:23 Apr 23, 2013


R T

Mkr1 Δ 200.25 kHz
-0.035 dB

Ref 107 dB μ V

Atten 10 dB

Peak
Log
10
dB/

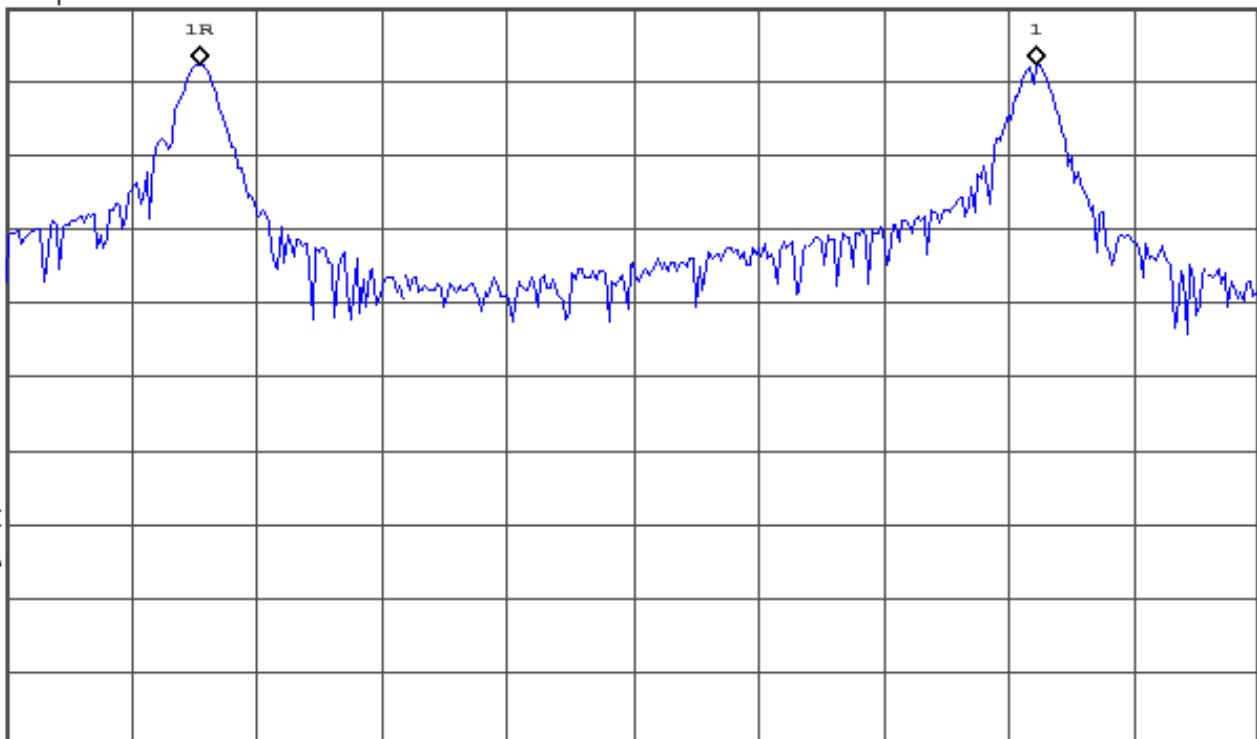

M1 S2
S3 FC
AA

Center 2.445 GHz
#Res BW 9 kHz

#VBW 10 kHz

Span 300 kHz

#Sweep 50 ms (401 pts)



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

FCC Section 15.247(a)(1)
20 dB Bandwidth

Test Data



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Agilent 11:25:21 Apr 23, 2013

R T

Mkr1 Δ 20.25 kHz

0.368 dB

Ref 100.9 dB μ V

Atten 5 dB

Peak
Log
10
dB/

M1 S2
S3 FC
AA

Center 2.44 GHz
#Res BW 3 kHz

#VBW 10 kHz

Span 100 kHz

#Sweep 500 ms (401 pts)



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

**FCC Section 15.247(a)(1)(iii)
Number of Channels and Occupancy Time**


Test Data




Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Plot Showing 76 Channels

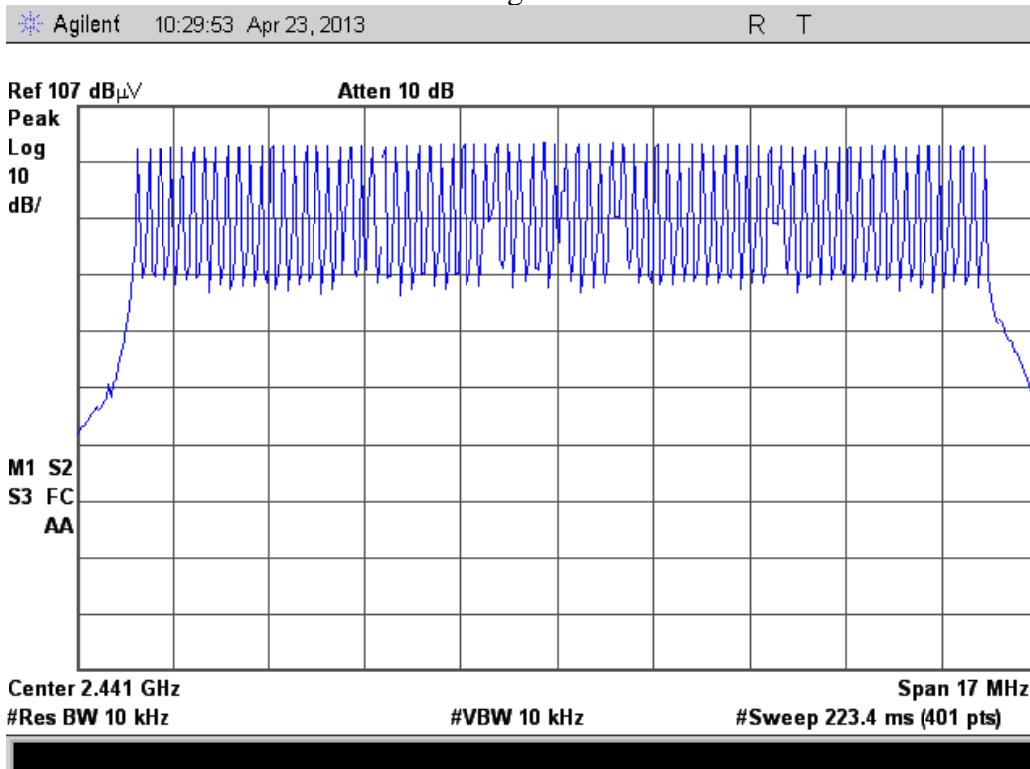

Plot Showing Dwell Time on One Channel

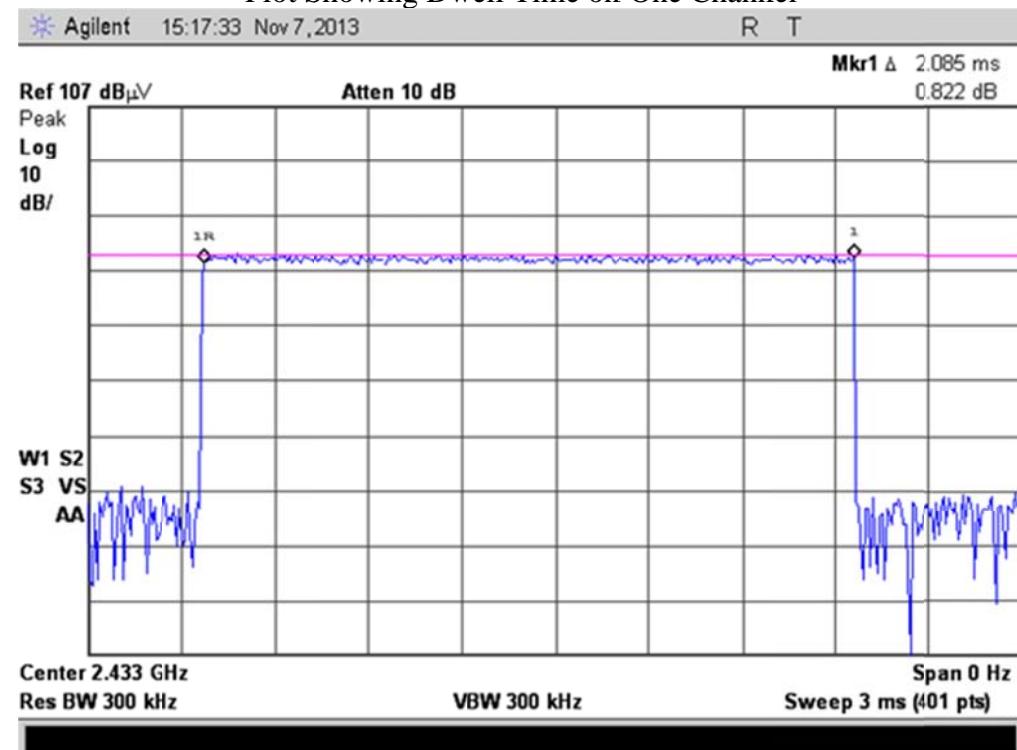

Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

**FCC Section 15.247 (b)(1)(4)
Peak Conducted Output Power
Alternate Procedure
Test Data**



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A



Retrif Testing Laboratories

Report No. R-1861P-3, Rev A

**FCC Section 15.247 (d)
Spurious Conducted Emissions, 30 MHz to 25 GHz
Alternate Procedure
Test Data**

NOTE: The purpose of the test data in this section is to show compliance with the 20dB suppression requirement of 15.247 (d). Field strength of spurious emissions in restricted bands is shown in the next data section.



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Test Method:	FCC Part 15, Subpart C, Section 15.247 (d), Spurious RF Conducted Emissions – Alternative Test Procedure of DA 00-705										
Customer:	The Sapling Company				Job No.	R-1861P-3					
Test Sample:	Transceiver										
Model No.:	Digital Clock										
Operating Mode:	Continuous CW Transmission at Discrete Hoping Frequencies CH. 0				Date:	04/19/13					
Technician:	D.Fiore										
Notes:	Test Distance: 3 Meters Detector: Peak RBW / VBW: 100 kHz / 300 kHz Temp: 22°C RH: 26%										
	* Minimum sensitivity of measurement system, readings taken at 1 meter converted to 3 meters via 1/d. (1): This emission falls within a restricted band of 15.205, see Field Strength of Spurious Radiation Data for Compliance										
Test Freq.	Antenna Pol./Height	EUT Position		Meter Reading	Correction Factor	Corrected Reading	Converted to 3M	Limit @ 3 M			
GHz	(V/H) /	Degrees		dBuV	dB	dBuV/m	dBuV/M	dBuV/M			
2.433	H / 1.50	291.7		81.16	29.86	111.02	111.02	-			
2.433	V / 2.44	302.3		84.93	29.86	114.79	114.79	-			
(¹) 4.866	H / 2.0	309.1		60.38	0.38	60.76	60.76	94.79			
(¹) 4.866	V / 2.0	332.3		60.10	0.38	60.48	60.48	94.79			
(¹) 7.299	H / 2.0	246.0		58.99	4.65	63.64	63.64	94.79			
(¹) 7.299	V / 2.0	371.5		60.50	4.65	65.15	65.15	94.79			
9.732	H / 2.0	286.6		62.05	5.72	67.77	67.77	94.79			
9.732	V / 2.0	282.5		58.11	5.72	63.83	63.83	94.79			
(¹) 12.165	H / 2.0	301.4		42.69	8.53	51.22	51.22	94.79			
(¹) 12.165	V / 2.0	235.6		40.49	8.53	49.02	49.02	94.79			
*14.598	H / 1.0	0.00		38.07	12.32	50.39	40.85	94.79			
*14.598	V / 1.0	0.00		38.07	12.32	50.39	40.85	94.79			
*17.031	H / 1.0	0.00		37.28	12.44	49.72	40.18	94.79			
*17.031	V / 1.0	0.00		37.28	12.44	49.72	40.18	94.79			
(¹) *19.464	H / 1.0	0.00		28.70	32.3	61.00	51.46	94.79			
(¹) *19.464	V / 1.0	0.00		28.70	32.3	61.00	51.46	94.79			
*21.897	H / 1.0	0.00		28.00	32.7	60.70	51.16	94.79			
*21.897	V / 1.0	0.00		28.00	32.7	60.70	51.16	94.79			
*24.33	H / 1.0	0.00		26.10	33.2	59.30	49.76	94.79			
*24.33	V / 1.0	0.00		26.10	33.2	59.30	49.76	94.79			



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Test Method:	FCC Part 15, Subpart C, Section 15.247 (d), Spurious RF Conducted Emissions – Alternative Test Procedure of DA 00-705										
Customer:	The Sapling Company				Job No.	R-1861P-3					
Test Sample:	Transceiver										
Model No.:	Digital Clock										
Operating Mode:	Continuous CW Transmission at Discrete Hoping Frequencies CH. 1										
Technician:	D.Fiore				Date:	04/22/13					
Notes:	Test Distance: 3 Meters Detector: Peak RBW / VBW: 100 kHz / 300 kHz Temp: 22°C RH: 26% * Minimum sensitivity of measurement system, readings taken at 1 meter converted to 3 meters via 1/d. (1): This emission falls within a restricted band of 15.205, see Field Strength of Spurious Radiation Data for Compliance										
Test Freq.	Antenna Pol./Height	EUT Position		Meter Reading	Correction Factor	Corrected Reading	Converted to 3M	Limit @ 3 M			
GHz	(V/H) /	Degrees		dBuV	dB	dBuV/m	dBuV/M	dBuV/M			
2.44	V / 1.45	330.6		84.34	29.86	114.20	114.20	-			
2.44	H / 1.80	321.6		81.01	29.86	110.87	110.87	-			
⁽¹⁾ 4.88	H / 2.0	159.0		61.86	0.38	62.24	62.24	94.20			
⁽¹⁾ 4.88	V / 2.0	187.2		59.86	0.38	60.24	60.24	94.20			
⁽¹⁾ 7.32	H / 2.0	288.6		61.54	4.65	66.19	66.19	94.20			
⁽¹⁾ 7.32	V / 2.0	152.5		62.95	4.65	67.60	67.60	94.20			
9.76	V / 2.0	210.9		57.70	5.72	63.42	63.42	94.20			
9.76	H / 2.0	179.5		65.74	5.72	71.46	71.46	94.20			
⁽¹⁾ 12.20	H / 2.0	317.9		44.35	8.53	52.88	52.88	94.20			
⁽¹⁾ 12.20	V / 2.0	286.2		37.71	8.53	46.24	46.24	94.20			
*14.64	H / 1.0	0.00		38.83	12.32	51.15	41.61	94.20			
*14.64	V / 1.0	0.00		40.08	12.32	52.40	42.86	94.20			
*17.08	H / 1.0	0.00		41.36	12.44	53.80	44.26	94.20			
*17.08	V / 1.0	0.00		38.91	12.44	51.35	41.81	94.20			
⁽¹⁾ *19.52	H / 1.0	0.00		28.40	32.30	60.70	51.16	94.20			
⁽¹⁾ *19.52	V / 1.0	0.00		28.40	32.30	60.70	51.16	94.20			
*21.96	H / 1.0	0.00		27.90	32.70	60.60	51.06	94.20			
*21.96	V / 1.0	0.00		27.90	32.70	60.60	51.06	94.20			
*24.40	H / 1.0	0.00		27.50	33.20	60.70	51.16	94.20			
*24.40	V / 1.0	0.00		27.50	33.20	60.70	51.16	94.20			



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Test Method:	FCC Part 15, Subpart C, Section 15.247 (d), Spurious RF Conducted Emissions – Alternative Test Procedure of DA 00-705										
Customer:	The Sapling Company				Job No.	R-1861P-3					
Test Sample:	Transceiver										
Model No.:	Digital Clock										
Operating Mode:	Continuous CW Transmission at Discrete Hoping Frequencies CH. 2										
Technician:	D.Fiore				Date:	04/22/13					
Notes:	Test Distance: 3 Meters Detector: Peak RBW / VBW: 100 kHz / 300 kHz Temp: 22°C RH: 26%										
	* Minimum sensitivity of measurement system, readings taken at 1 meter converted to 3 meters via 1/d. (1): This emission falls within a restricted band of 15.205, see Field Strength of Spurious Radiation Data for Compliance										
Test Freq.	Antenna Pol./Height	EUT Position		Meter Reading	Correction Factor	Corrected Reading	Converted to 3M	Limit @ 3 M			
GHz	(V/H) /	Degrees		dBuV	dB	dBuV/m	dBuV/M	dBuV/M			
2.448	H / 1.69	238.7		80.09	29.86	109.95	109.95	-			
2.448	V / 1.35	167.7		83.17	29.86	113.03	113.03	-			
(¹) 4.896	H / 2.0	288.4		61.95	0.38	62.33	62.33	93.03			
(¹) 4.896	V / 2.0	272.2		59.75	0.38	60.13	60.13	93.03			
(¹) 7.344	H / 2.0	193.7		59.19	4.65	63.84	63.84	93.03			
(¹) 7.344	V / 2.0	232.5		62.88	4.65	67.53	67.53	93.03			
9.792	H / 2.0	249.1		62.71	5.72	68.43	68.43	93.03			
9.792	V / 2.0	228.2		58.78	5.72	64.50	64.50	93.03			
(¹) 12.240	H / 2.0	256.8		43.44	8.53	51.97	51.97	93.03			
(¹) 12.240	V / 2.0	358.5		39.44	8.53	47.97	47.97	93.03			
*14.688	H / 1.00	0.00		38.89	12.32	51.21	41.67	93.03			
*14.688	V / 1.00	0.00		38.89	12.32	51.21	41.67	93.03			
*17.136	H / 1.00	0.00		40.50	12.44	52.94	43.40	93.03			
*17.136	V / 1.00	0.00		40.50	12.44	52.94	43.40	93.03			
(¹) *19.584	H / 1.00	0.00		33.40	32.70	66.10	56.56	93.03			
(¹) *19.584	V / 1.00	0.00		33.40	32.70	66.10	56.56	93.03			
(¹) *22.032	H / 1.00	0.00		27.80	32.70	60.50	50.96	93.03			
(¹) *22.032	V / 1.00	0.00		27.80	32.70	60.50	50.96	93.03			
*24.480	H / 1.00	0.00		28.40	33.20	61.60	52.06	93.03			
*24.480	V / 1.00	0.00		28.40	33.20	61.60	52.06	93.03			



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

FCC Section 15.247 (d)
Field Strength of Spurious Emissions
30 kHz to 25 GHz
(Including Restricted Bands)

Test Data



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A



Retrif Testing Laboratories

Report No. R-1861P-3, Rev A

Test Method:	FCC Part 15, Subpart C, Section 15.247 (d), Spurious Radiated Emissions		
Customer:	The Sapling Company	Job No.	R-1861P-3
Test Sample:	Transceiver		
Model No.:	Digital Clock		
Operating Mode:	Transmitting at 2.433 GHz, Hopping Stopped		
Technician:	D.Fiore	Date:	04/12/13
Notes:	Test Distance: 3 Meters Detector: Average RBW / VBW: 1 MHz / 10 Hz Temp : 22°C RH : 26% * Minimum sensitivity of measurement system, readings taken at 1 meter converted to 3 meters via 1/d.		

Duty Cycle Correction Factor = $20 \log (\text{Dwell Time} / 100 \text{ mSec}) = 20 \log (3.0 / 100)$

The frequency range was scanned from 30 kHz to 25 GHz, all emissions not recorded were more than 20 dB below the specified limit.



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

The frequency range was scanned from 30 kHz to 25 GHz, all emissions not recorded were more than 20 dB below the specified limit.



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Duty Cycle Correction Factor = $20 \log (\text{Dwell Time} / 100 \text{ mSec}) = 20 \log (3.0 / 100)$

The frequency range was scanned from 30 kHz to 25 GHz, all emissions not recorded were more than 20 dB below the specified limit.



Retrif Testing Laboratories

Report No. R-1861P-3, Rev A

Test Method:	FCC Part 15, Subpart C, Section 15.247 (d), Spurious Radiated Emissions		
Customer:	The Sapling Company	Job No.	R-1861P-3
Test Sample:	Transceiver		
Model No.:	Digital Clock		
Operating Mode:	Transmitting at 2.448 GHz, Hopping Stopped		
Technician:	D.Fiore	Date:	04/12/13
Notes:	Test Distance: 3 Meters Detector: Peak RBW / VBW: 1 MHz / 3 MHz Temp : 22°C RH : 26%		
* Minimum sensitivity of measurement system, readings taken at 1 meter converted to 3 meters via 1/d.			

The frequency range was scanned from 30 kHz to 25 GHz, all emissions not recorded were more than 20 dB below the specified limit.



Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

Duty Cycle Correction Factor = $20 \log (\text{Dwell Time} / 100 \text{ mSec}) = 20 \log (3.0 / 100)$

The frequency range was scanned from 30 kHz to 25 GHz, all emissions not recorded were more than 20 dB below the specified limit.



Retrif Testing Laboratories

Report No. R-1861P-3, Rev A

FCC Section 15.207(a)
Conducted Emissions, Power Leads
150 kHz to 30 MHz

Test Data




Retlif Testing Laboratories

Report No. R-1861P-3, Rev A

FCC 15.207 Conducted Emissions 150kHz to 30MHz

Customer: Sapling, Inc.
Test Sample: Low Power Transceiver
Test Specification: FCC 15.207
Mode of Operation: Continuous Transmission
Technician/Date: D.Fiore 05/03/13
Notes: 120VAC, 60Hz Hot

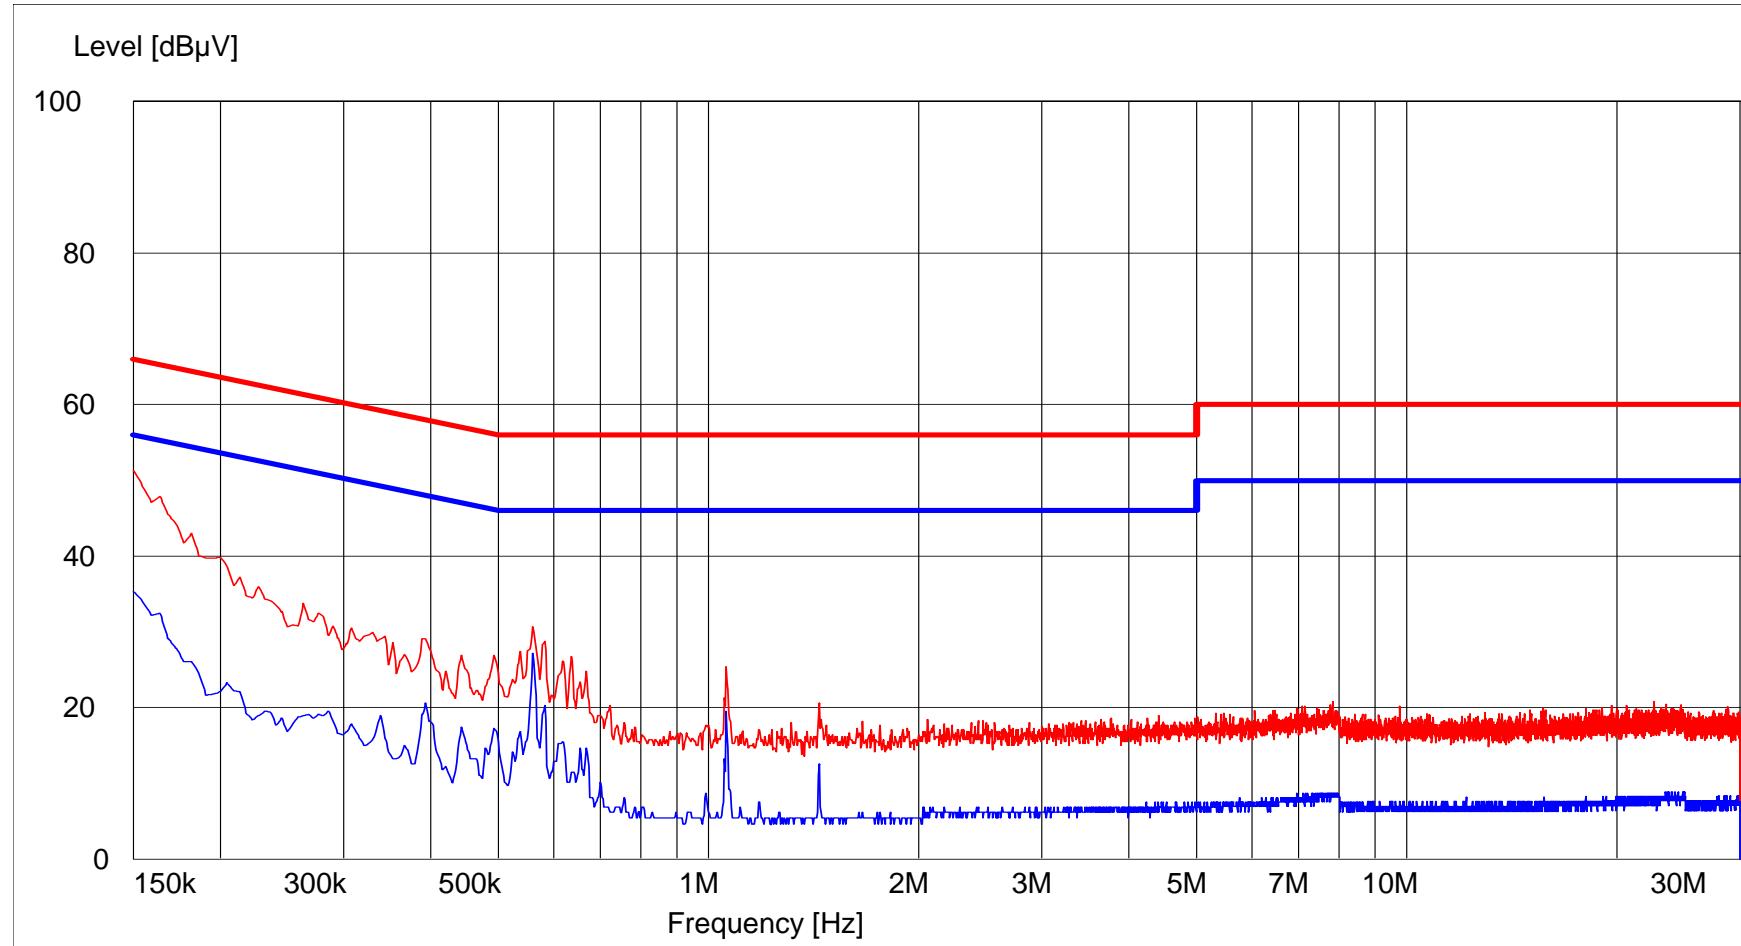

FCC 15.207 Conducted Emissions 150kHz to 30MHz

Customer: Sapling, Inc.
Test Sample: Low Power Transceiver
Test Specification: FCC 15.207
Mode of Operation: Continuous Transmission
Technician/Date: D.Fiore 05/03/13
Notes: 120VAC, 60Hz Neutral

