



TC-700 Block Diagram

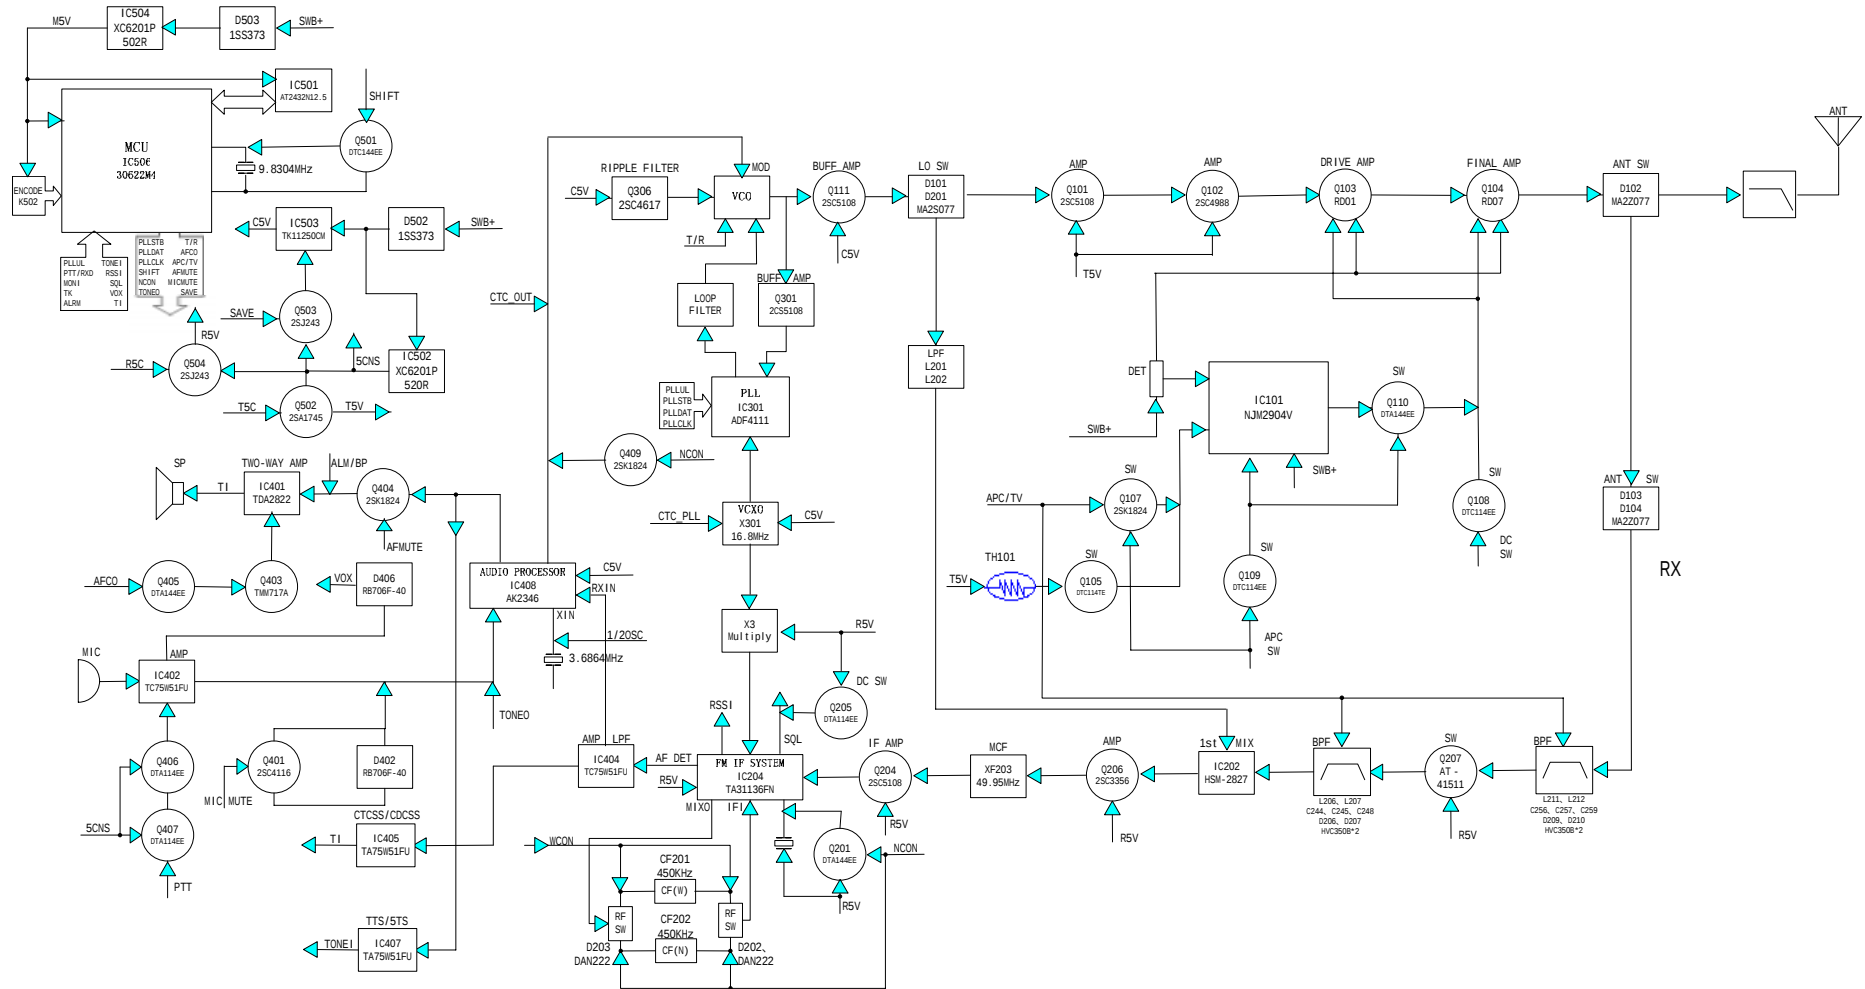


TC-700 Level Diagram

Rx Section

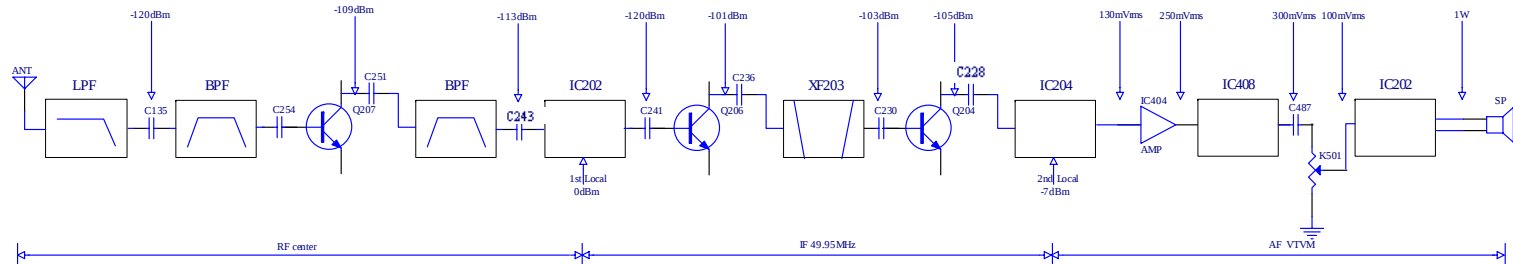

Each of the levels plotted from RF to the first IF is the level that can provide a 12dB SINAD for an SSG signal through a 470pFb coupling capacitor. When AF output is adjusted to 1W, adjust the frequency deviation of 1KHz AF level to 3KHz (Wide), 1.5KHz (Narrow).

Transmit

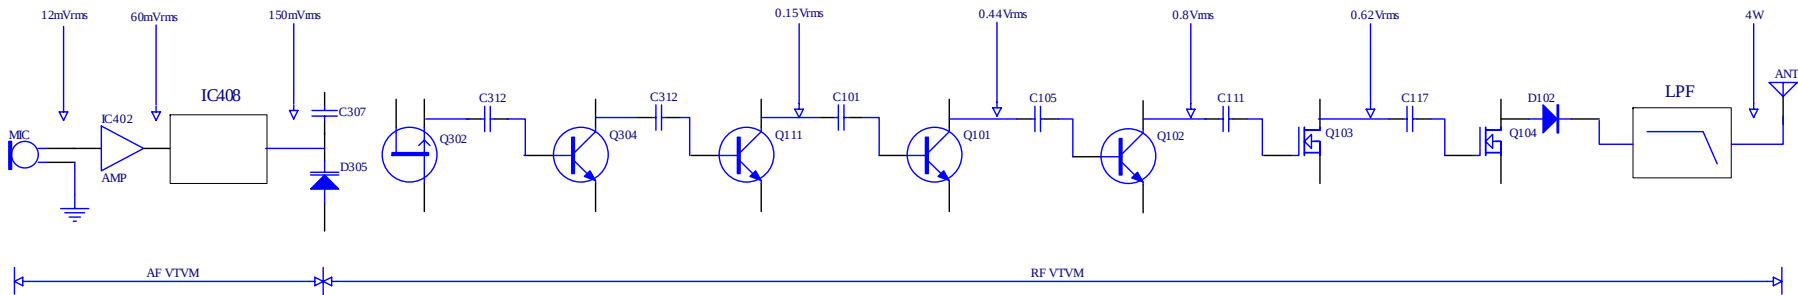

AF and RF levels are measured at high impedance.