

Radio Satellite Communication
Untertürkheimer Straße 6–10, D-66117 Saarbrücken,
Telephone +49 (0) 681 598- 0, Fax +49 (0) 598 9075

Test report No.: 2-3610-01-02/04

This test report consists of 27 pages Page 1 (26)

Recognized by the
Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: 3463 (IC)
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
TTI-P-G 081/94-D0



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test report No. :2-3610-01-02/04
Standard :Part 15.231
Applicant :Gemini Trading s.l.r.
Type :7218PI1 / 7208PI1
FCC-ID No : R7K72018PI1

BLUETOOTH is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

Table of contents

1 General information

- 1.1 Notes
- 1.2 Testing laboratory
- 1.3 Details of applicant
- 1.4 Application details
- 1.5 Test item
- 1.6 Test specifications

2 Technical test

- 2.1 Summary of test results
- 2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.


Test laboratory manager:

2004-05-28 RSC - 8411 Berg M.

Date

Section

Name



Signature

Technical responsibility for area of testing:

2004-05-28 RSC - 8412 Hausknecht D.

Date

Section

Name



Signature

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 0

Telefax : + 49 681 598 - 9075

E-mail : info@ict.cetecom.de

Internet : www.cetecom-ict.de

Accredited testing laboratory

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.

DAR registration number: TTI-P-G-081/94-D0

Listed by: Federal Communications Commission (FCC)

Identification/Registration No: 90462

Anechoic chamber registration no.:3463 (IC)

[Accredited BluetoothTM Test Facility \(BQTF\)](#)

[BLUETOOTHTM is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM](#)

1.3 Details of applicant

Name : Gemini Trading s.l.r.

Street : Via Galvani 12

City : I-21020 Bodio Lomnago

Country : Italy

Telephone: +39 0332 943211

Fax : +39 0332 9438080

E-mail : info@gemini-alarm.com

Contact person:

Name : Dr. Andrea Rossi

Telephone : +39 0332 943211

Telex : +39 0332 9438080

E-mail : a.rossi@gemini-alarm.com

1.4 Application details

Date of receipt of test item : 2004-04-22

Date of test : 2004-05-24

Person(s) who have been : -

present during the test

1.5 Test item

Type of equipment : Remote Control Transmitter
Type designation : 7218PI1 (handheld 1 button transmitter)
7208PI1 (handheld 2 buttons transmitter)
Manufacturer : Same as applicant
Street :
City :
Country :
Serial number : - / -

Additional information :

Frequency : 433.92 MHz
Type of modulation : 10K0A1D
Channel spacing : >25 kHz
Number of channels : 1
Antenna : Integral printed board antenna
Max. ERP : Peak: 55.9 dB μ V/m ; Average: 53.2 dB μ V/m at 3m distance
Power supply : 6.0 V DC by 2 x 3.0 VDC Lithium Batteries
Temperature range : -10°C - +55°C
FCC ID : R7K72018PI1

1.6 Test specifications: FCC Part 15 §15.209 FCC Part 15 §15.231 CANADA RSS-210

2 Technical test

2.1 Summary of test results

The radiated measurements were performed vertical and horizontal over the whole frequency range. We start at 1 m high with vertical receiving antenna and rotate the dish continuously. During rotation we use the antenna lift system to vary the high from 1 to 4 m. So we find maximum radiation output. At this points we do manual re-measurements. After this we do the same measurements in horizontal position of the receiving antenna. This (horizontal and vertical) is made for all the three planes of the test sample. We use the maximum received results.

The detector function and selection of bandwidth are according ANSI C63.2-1996 item 8.2.1 and ANSI C63.4-1992 Item 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 MHz, wave-guide horn

All measurement settings are according to FCC 15.35, 15.205, 15.209,15.231.

The product fulfills also the requirements for CANADA RSS-210

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

2.2 Test report

TEST REPORT

Test report no. : 2-3610-01-02/04


TEST REPORT REFERENCE

LIST OF MEASUREMENTS

Paragraph	PARAMETER TO BE MEASURED	PAGE
TRANSMITTER PARAMETERS		
§ 15.231 (e)	Timing of the transmitter	9
§ 15.231 (e)	Emission limitations	11
§ 15.231 (c)	Occupied bandwidth	15
Test equipment listing		19
Photographs of the equipment		21

Timing of the transmitter

SUBCLAUSE § 15.231 (a) (1)

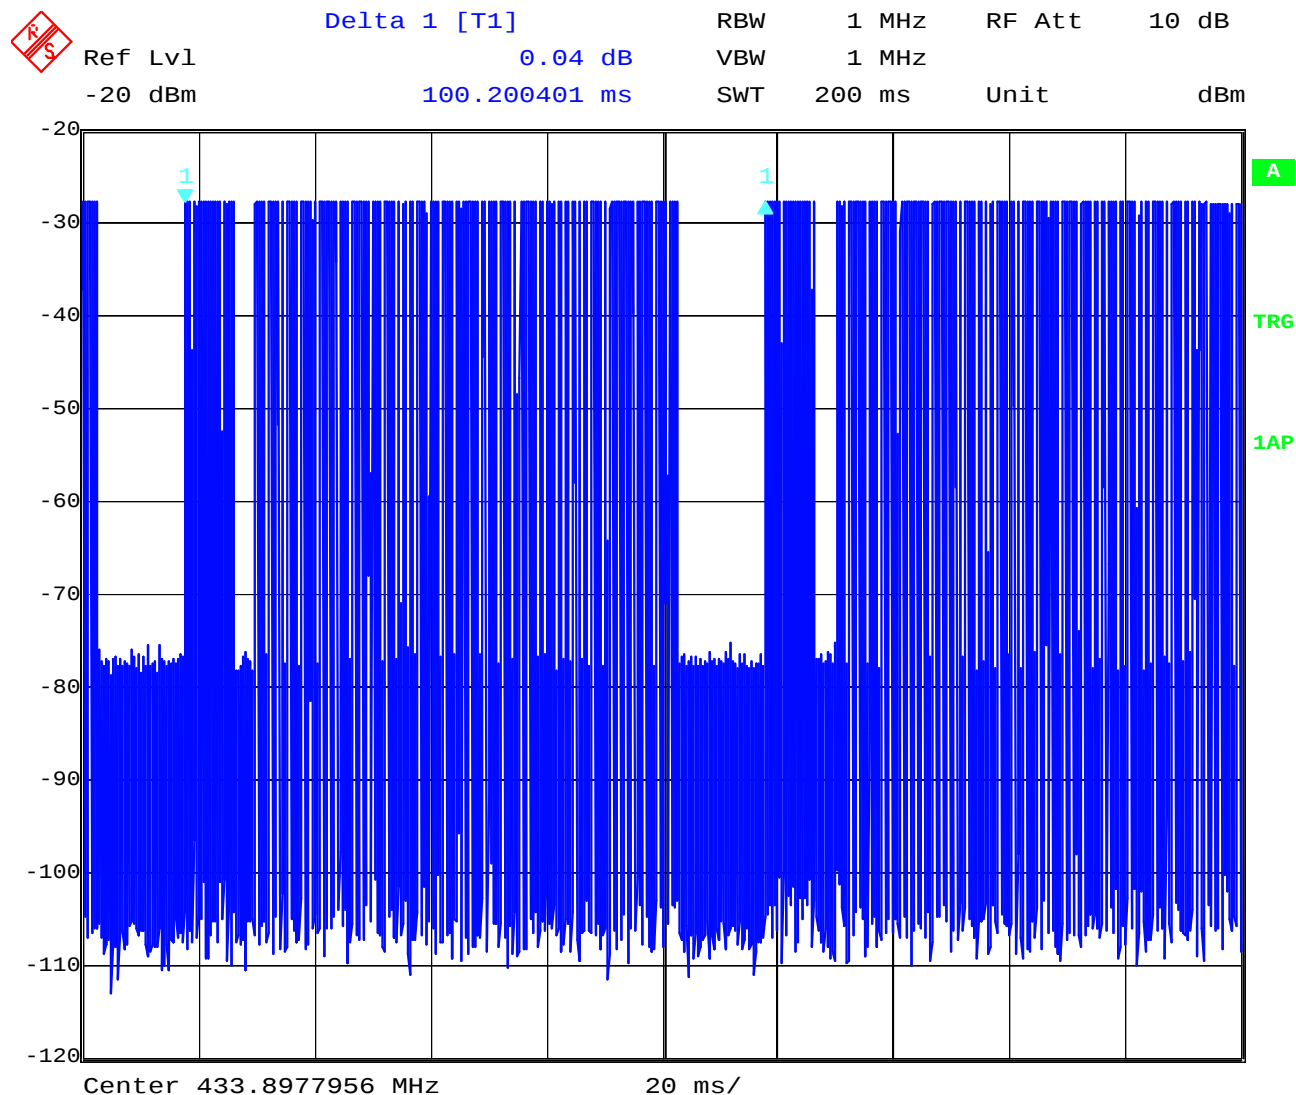


Date: 23.APR.2004 08:26:35

The pulse train length is ~ 100ms. (Including gap)

Timing of the transmitter

SUBCLAUSE § 15.231 (a) (1)

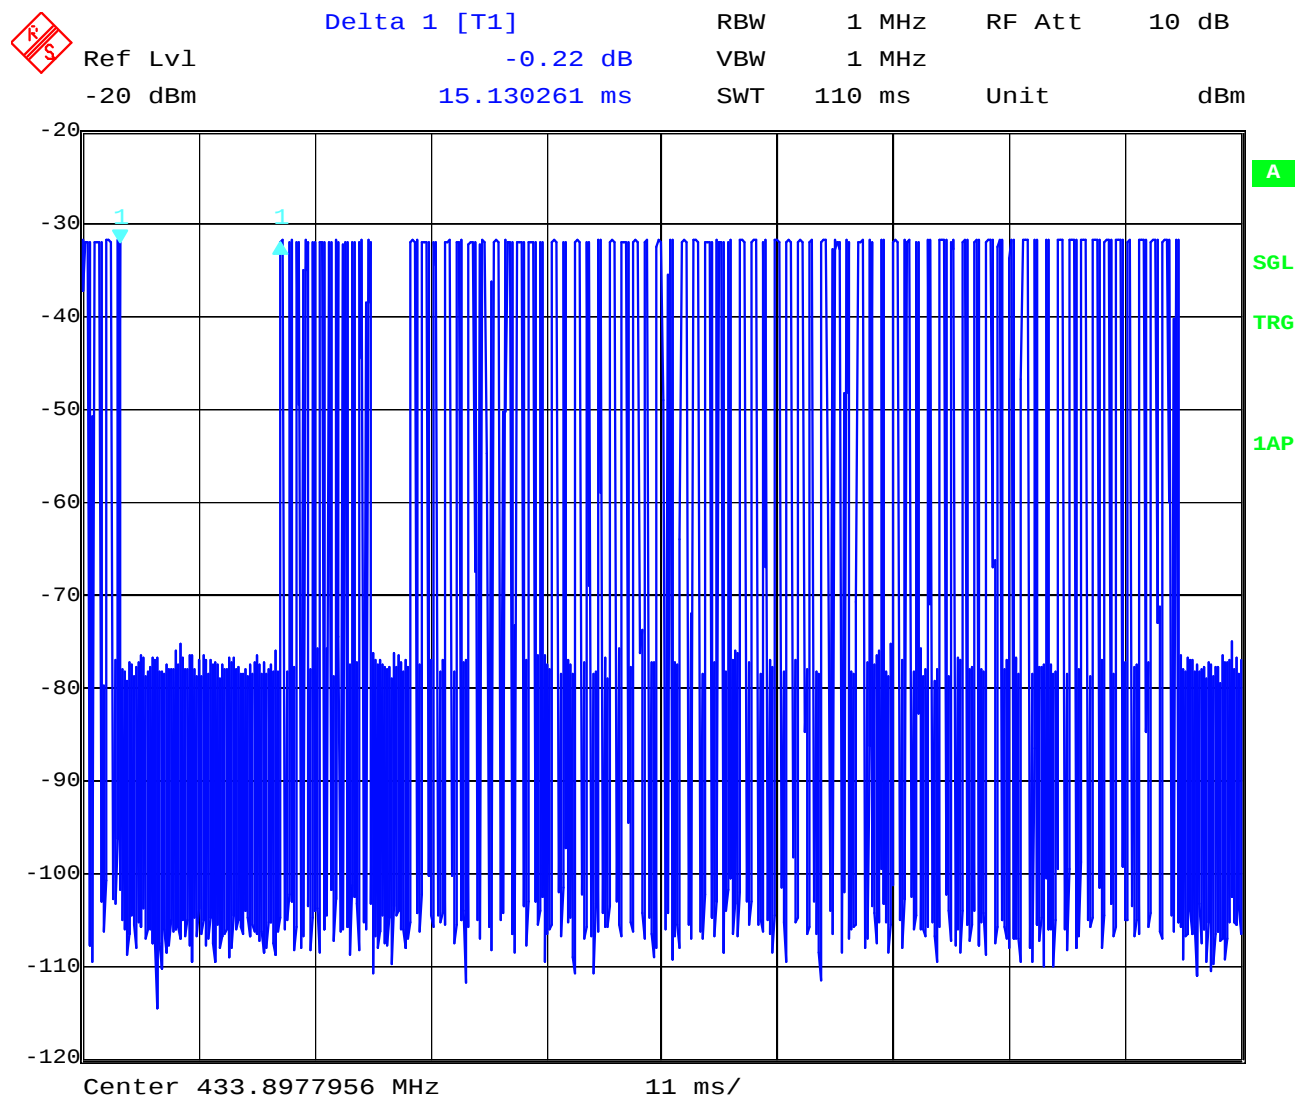


Date: 23.APR.2004 08:34:40

The gap between two data frames is ~ 15.13 ms

Timing of the transmitter

SUBCLAUSE § 15.231 (a) (1)

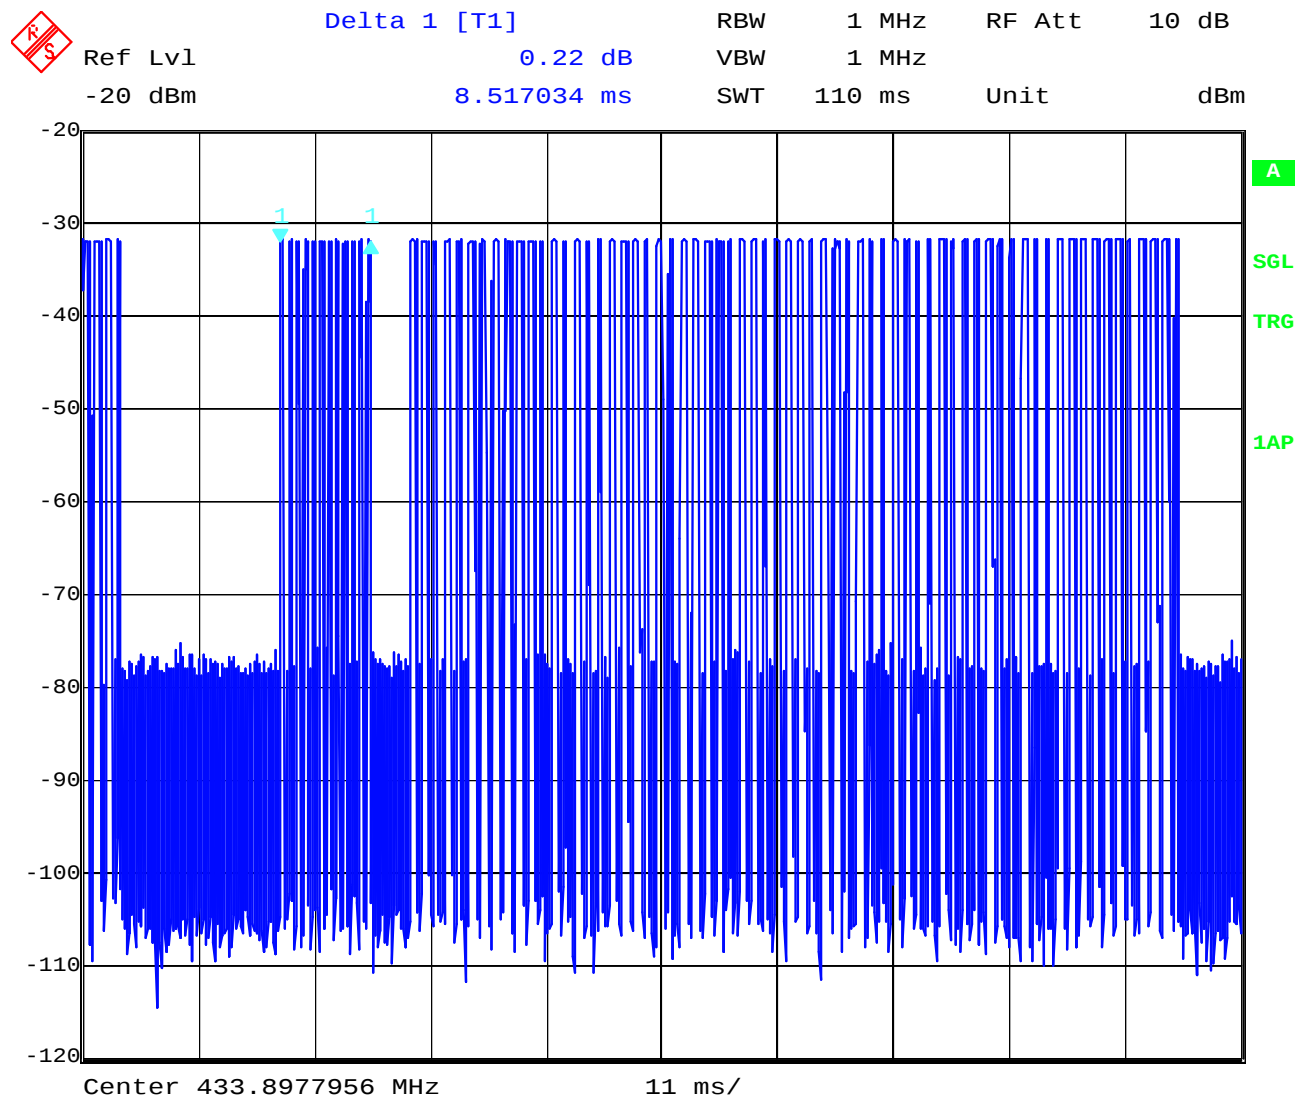


Date: 23.APR.2004 08:29:34

Remark: The pulse train length is ~ 100ms. (Including gap)
The header of the pulse train is ~ 8.25ms.

Timing of the transmitter

SUBCLAUSE § 15.231 (a) (1)

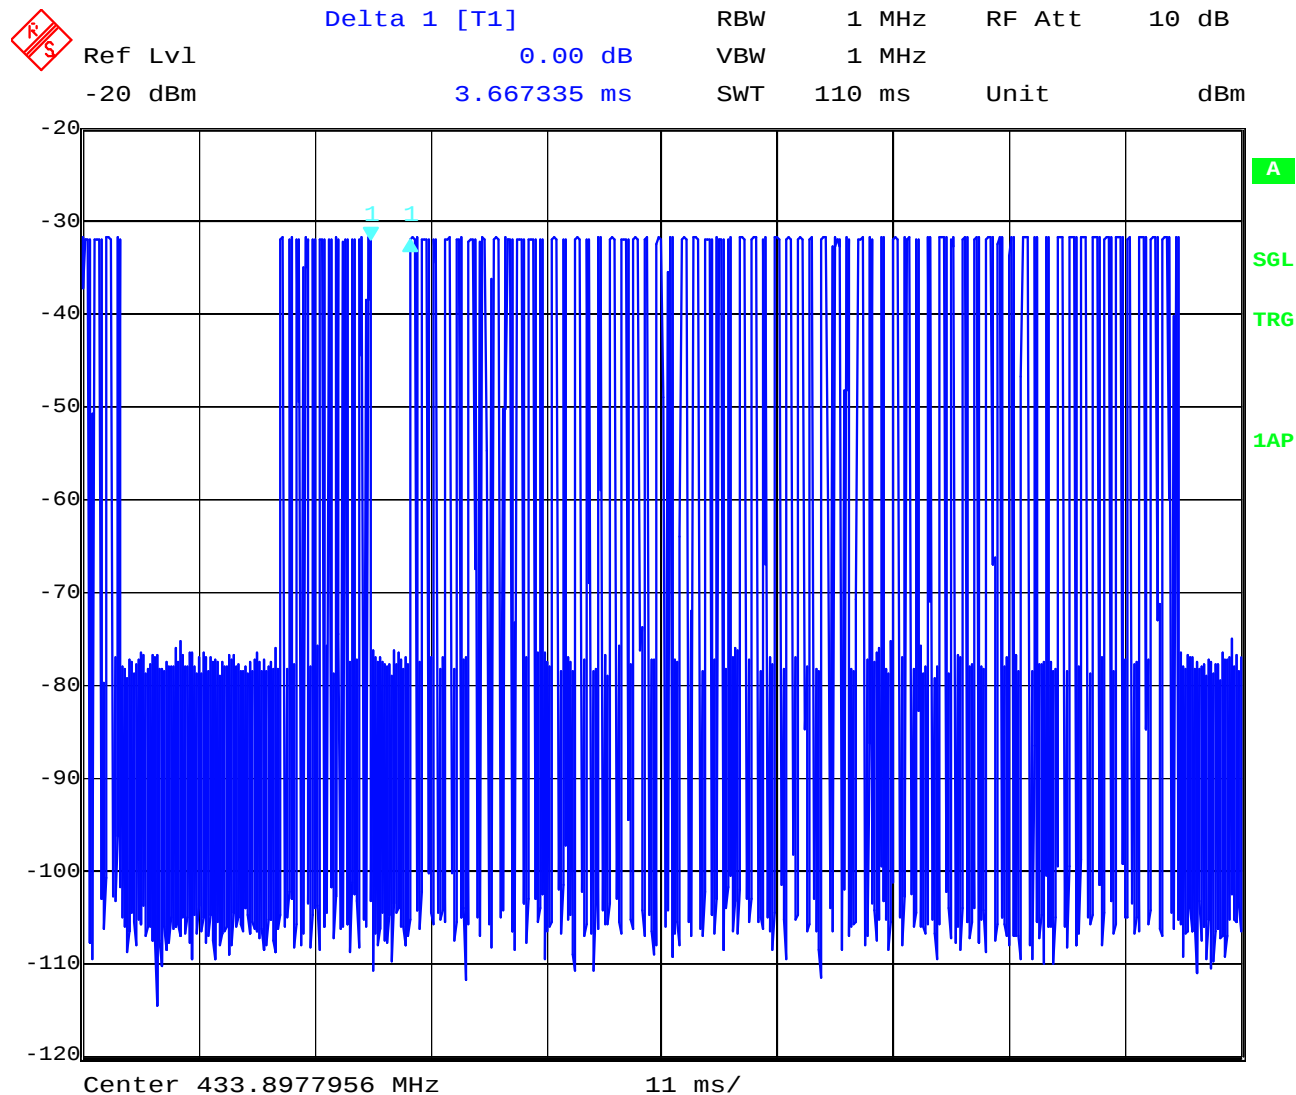

Date: 23.APR.2004 08:32:54


Remark: The pulse train length is ~ 100ms. (Including gap)

The header of the pulse train is ~ 8.25ms.

The gap between header and data is ~ 3.67 ms

Timing of the transmitter

SUBCLAUSE § 15.231 (a) (1)

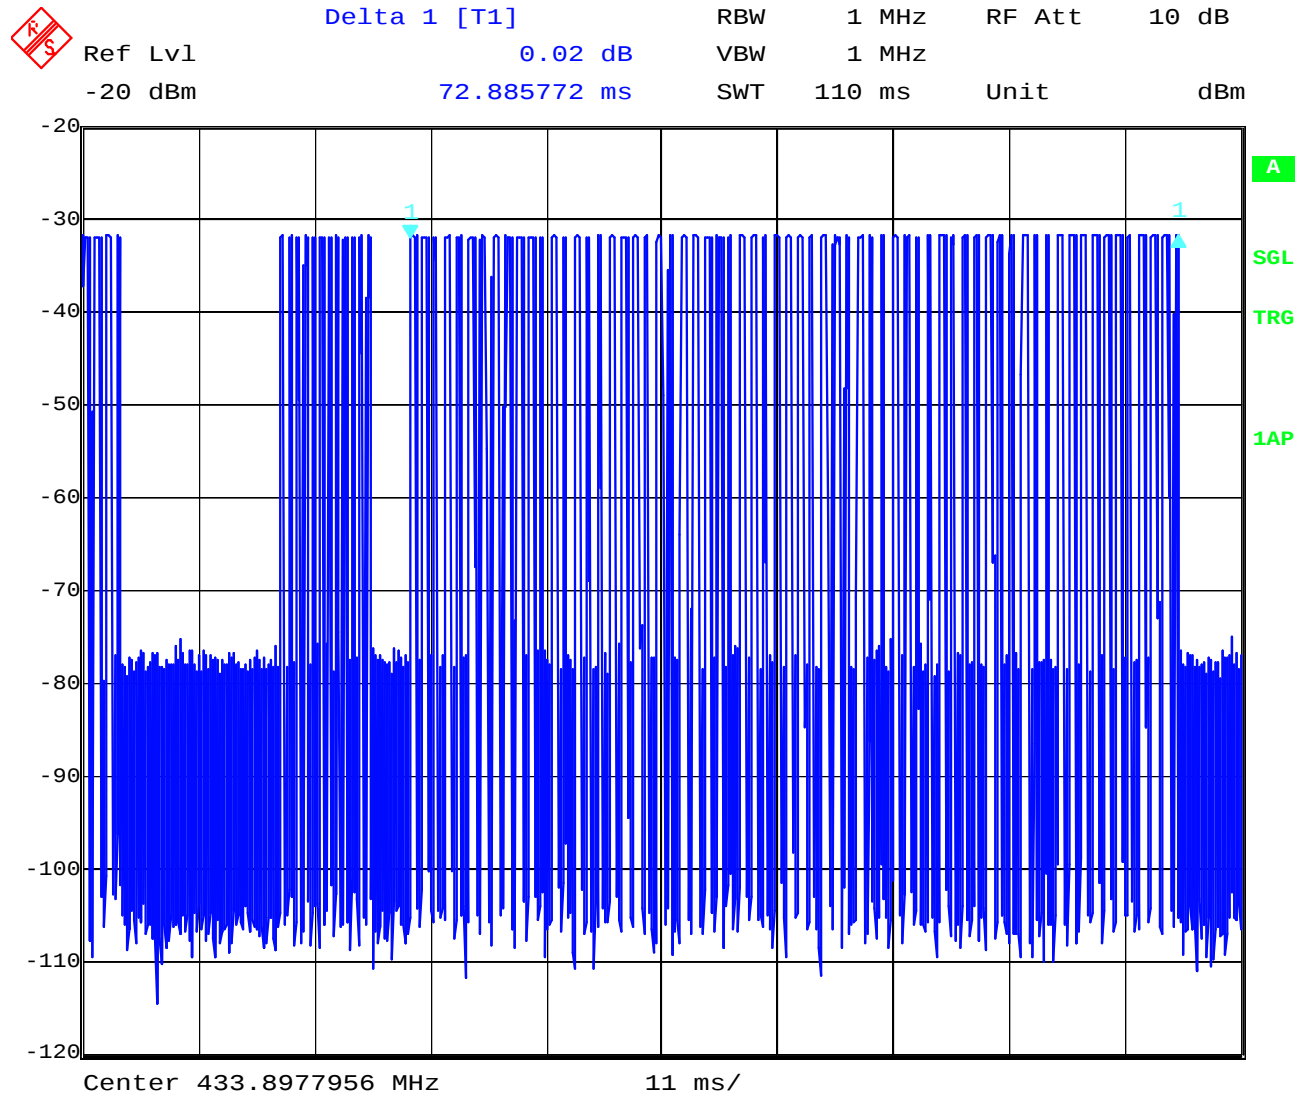

Date: 23.APR.2004 08:33:42

Remark: The pulse train length is ~ 100ms. (Including gap)

The header of the pulse train is ~ 8.25ms.


The gap between header and data is ~ 3.67 ms

The data packet is ~ 72.89 ms

The gap between two data frames is ~ 15.13 ms

Timing of the transmitter SUBCLAUSE § 15.231 (a) (1)

Transmit behavior after releasing the TX-Button

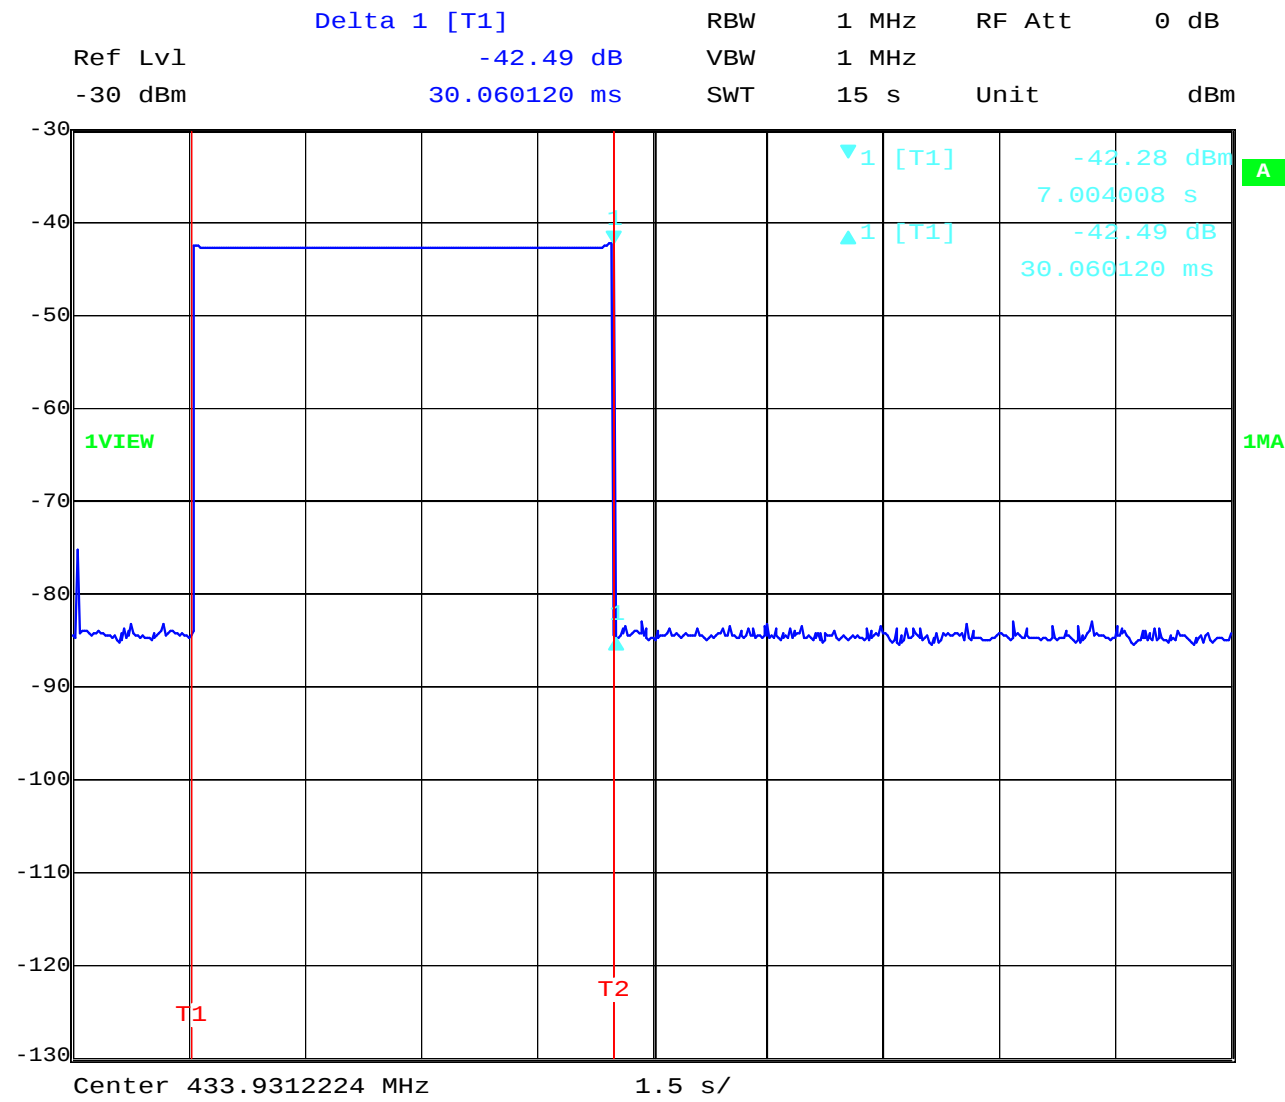

Date: 27.MAY.2004 10:49:42

T 1 : Press button
T 2 : Release button

The transmitter stops transmitting immediately after releasing the button

So the product complies with the FCC requirements.

Timing of the transmitter

SUBCLAUSE § 15.231 (a)

Duty Cycle:

Regarding to 100 ms, we have a TX-On time of 72.89 ms + 8.25 ms = 81.14 ms

The TX-Off time is 3.67 ms + 15.13 ms = 18.8 ms

The declared duty cycle (Manufacture declaration) within the pulse train is 66%

So we have an average correction factor of $10 \log (0.66 \times 0.8117) = -2.71 \text{ dB}$

Radiated output power is 55.9 dB μ V/m at 3m distance PEAK .

The calculated AVERAGE is 55.9 dB μ V/m – 2.71 dB = 53.19 dB μ V/m at 3m distance.

The limit for 433.9 MHz according to FCC15.231 is 80.8 dB μ V/m.

So the product complies with the FCC requirements.

FIELDSTRENGTH OF THE FUNDAMENTAL MAXIMUM PEAK OUTPUT POWER (RADIATED)

SUBCLAUSE § 15.231 (a)

TEST CONDITIONS		MAXIMUM AVERAGE OUTPUT POWER (μ V/m)		
Frequency 433.92 MHz		7208PI1	7218PI1	
T _{nom} (23)°C	V _{nom} (6.0)V	358.51 μ V/m (51.09 dB μ V/m)	456.56 μ V/m (53.19 dB μ V/m)	
Maximum deviation from output power under extreme test conditions (dBc)		not applicable	not applicable	
Measurement uncertainty		$\pm 3\text{dB}$		

RBW/VBW : 1 MHz

Limit for 433,92 MHz : 10997 μ V/m (80.8 dB μ V/m)

Limits

SUBCLAUSE § 15. 231 (b)

Frequency (MHz)	Field strength (μ V/m)	Field strength of Spurious emissions (μ V/m)
40.66-407	2250	225
70-130	1250	125
130-174	1250 to 3750 **	125 to 375 **
174-260	3750	375
260-470	2750 to 12500 **	375 to 1250 **
Above 470	12500	1250
** linear interpolations		

SPURIOUS EMISSION (radiated)

§ 15.231 (b)

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBµV/m) Average/QP	limit max. allowed emmission power	actual attenuation below frequency of operation (dB)	results
7218PI1					
433,92		53.19 AV	80.8 dBµV/m Average		Operating frequency
3037.44		36.0 AV	20 dBc/ 54 dBµV/m	17.19	complies
7208PI1					
433.92		51.09 AV	80.8 dBµV/m Average		Operating frequency
867.86		39.7	20 dBc / 46 dBµV/m		
1301.79		24.5	54 dBµV/m		
2169.65		31.3			
Measurement uncertainty			± 3dB		

So the product complies with the FCC requirements.



Limits

SUBCLAUSE § 15. 231 (b)


Frequency (MHz)	Field strength (µV/m) of the fundamental	Field strength of Spurious emissions (µV/m)
40.66-407	2250 / 67 dBµV/m	225 / 47 dBµV/m
70-130	1250 / 62 dBµV/m	125 / 42 dBµV/m
130-174	1250 to 3750 ** 62 – 71.5 dBµV/m	125 to 375 ** 42 – 51.5 dBµV/m
174-260	3750 / 71.5 dBµV/m	375
260-470	2750 to 12500 ** 71.5 – 82 dBµV/m	375 to 1250 ** 51.5 – 62 dBµV/m
Above 470	12500 / 82 dBµV/m	1250 / 62 dBµV/m
** linear interpolations		

SPURIOUS EMISSION (radiated)

§ 15.231 (b)

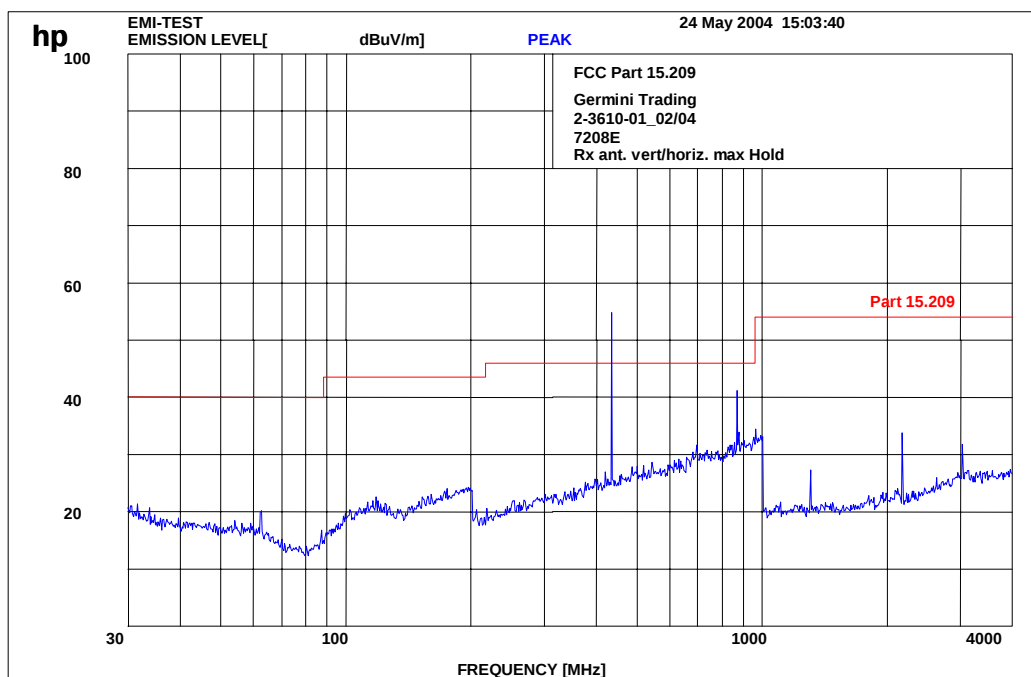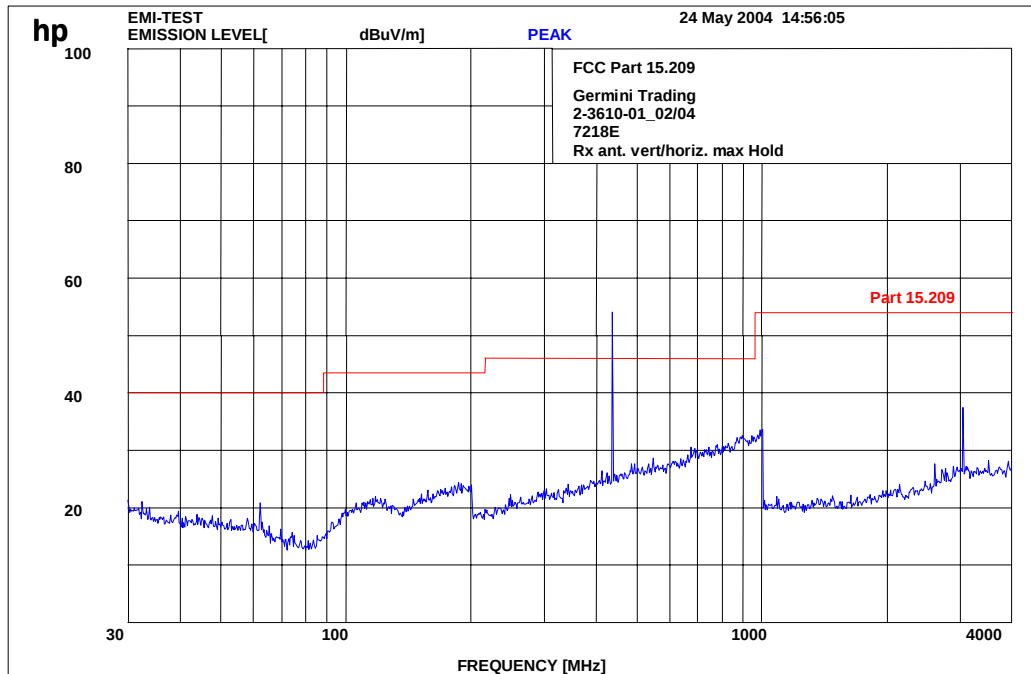

Occupied bandwidth FCC 15.231 (c)

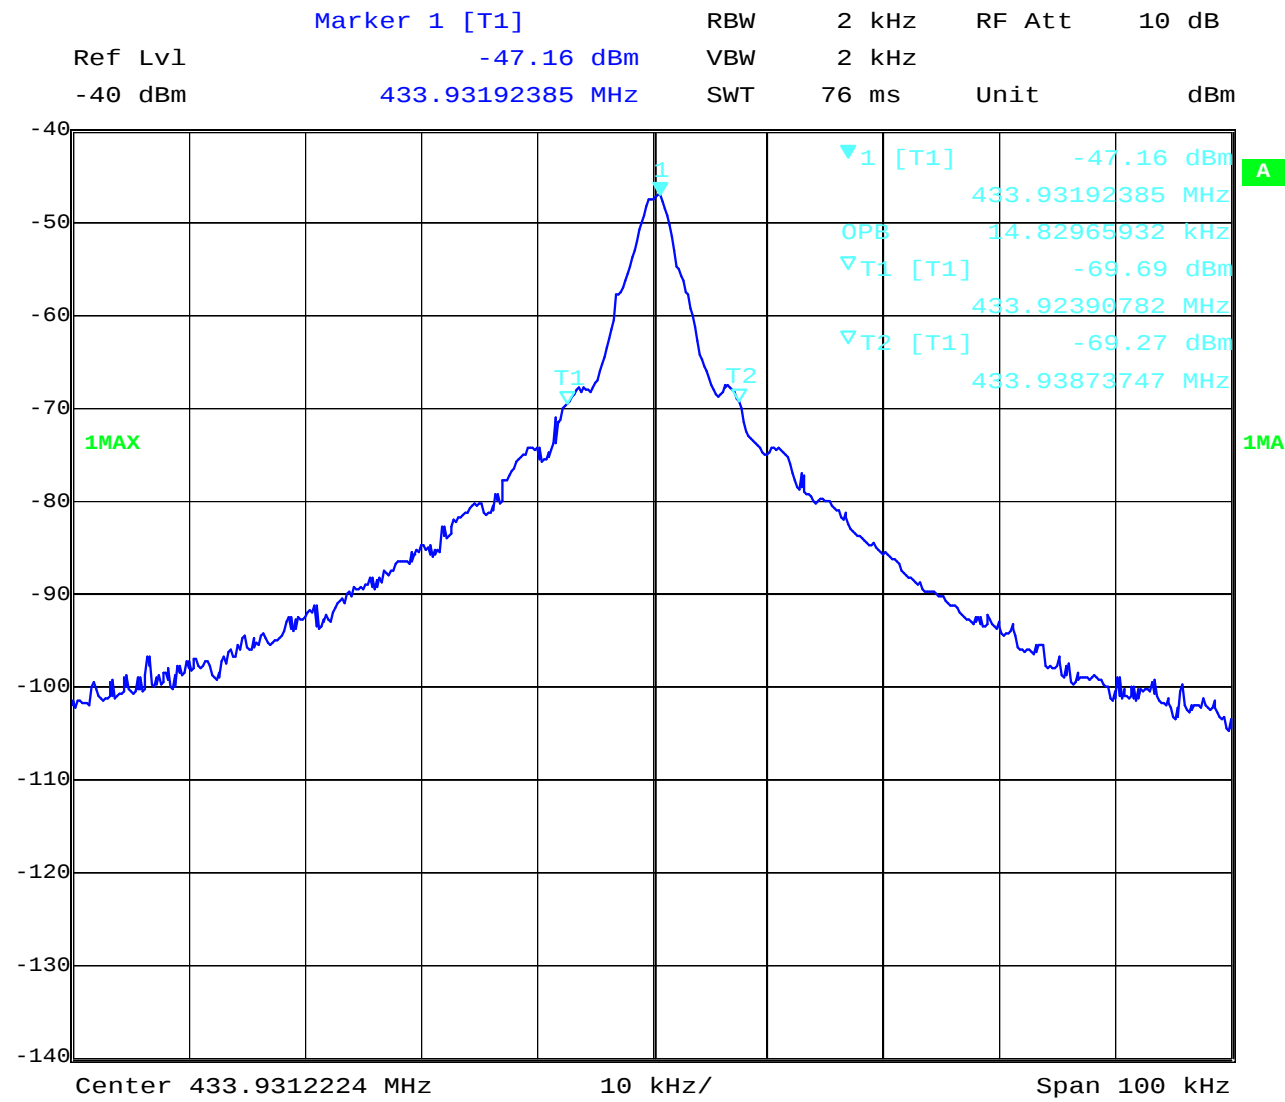

Date: 27.MAY.2004 10:38:22

The occupied bandwidth (20 dB / 99%) is 14.83 kHz .

So the product complies with the FCC requirements.

Limit	SUBCLAUSE § 15.231(c)
< 0.25% of the centre frequency, here 1.08 MHz	


TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032
09	Regulating Transformer	MPL	Erfi	91350
10	LISN	NNLA 8120	Schwarzbeck	8120331
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulation Meter	9008	Racal-Dana	2647
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899
17	Anechoic Chamber	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenna	3104	Emco	3758
23	Log. Per. Antenna	3146	Emco	2130
24	Double Ridged Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Anechoic Chamber		Frankonia	
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power Supply	6032A	Rohde & Schwarz	2933A05441
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				
67				
68				

Test site

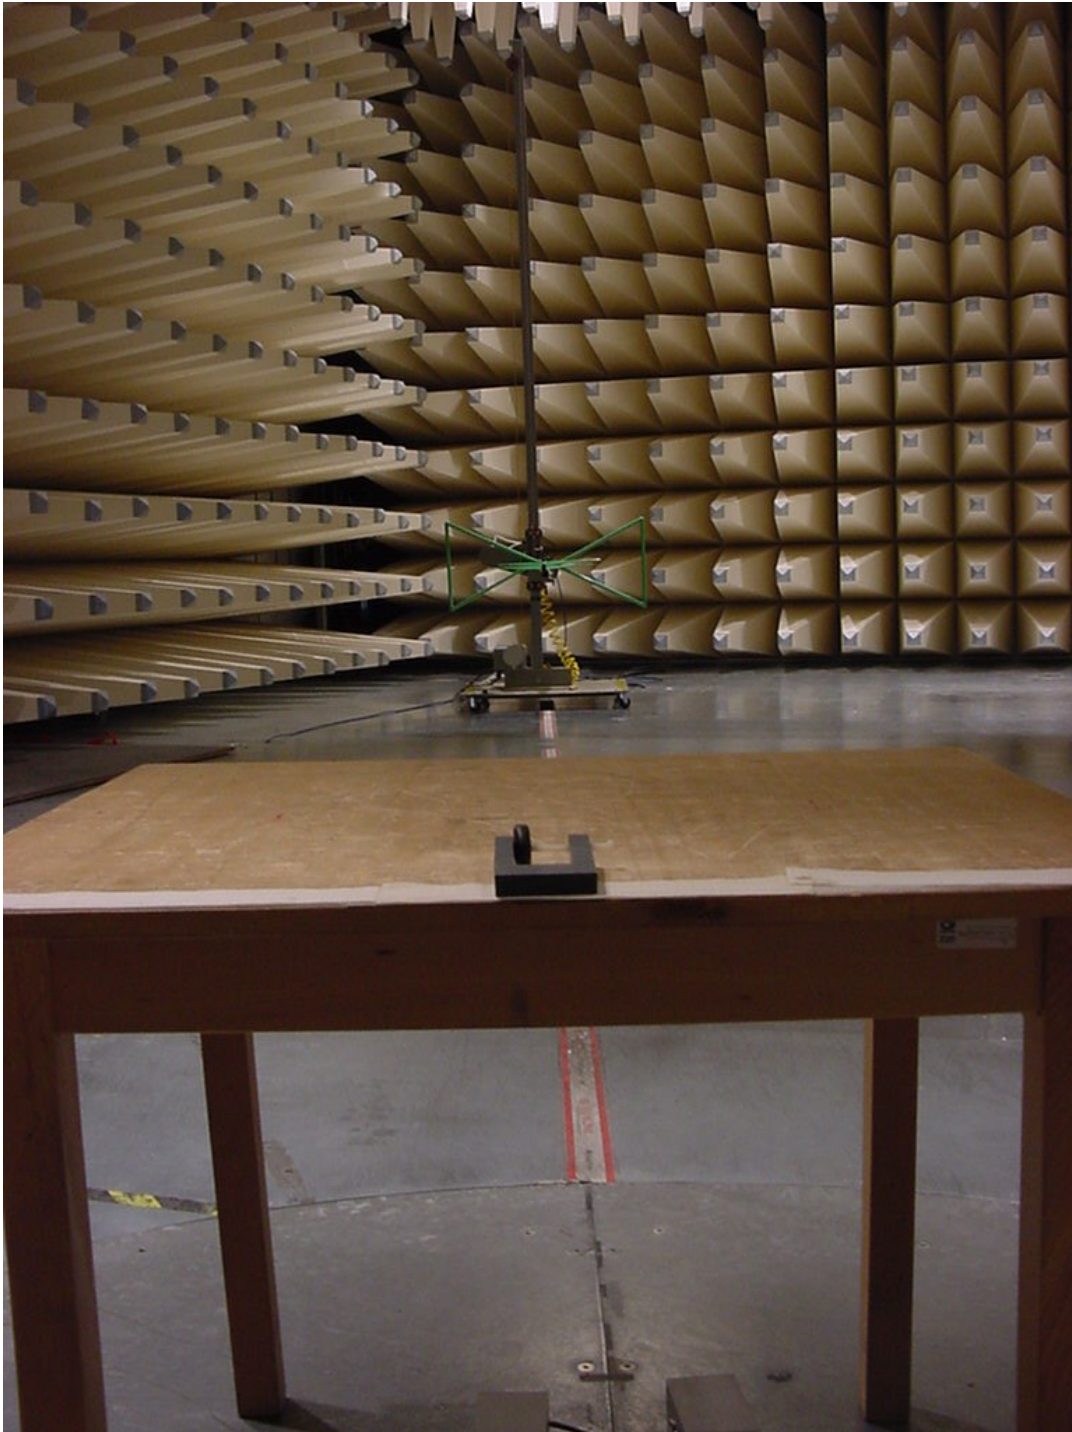

Test site



Photographs of the equipment

Photograph no.: 1




Photographs of the equipment

Photograph no.: 2



Photographs of the equipment

Photograph no.: 3

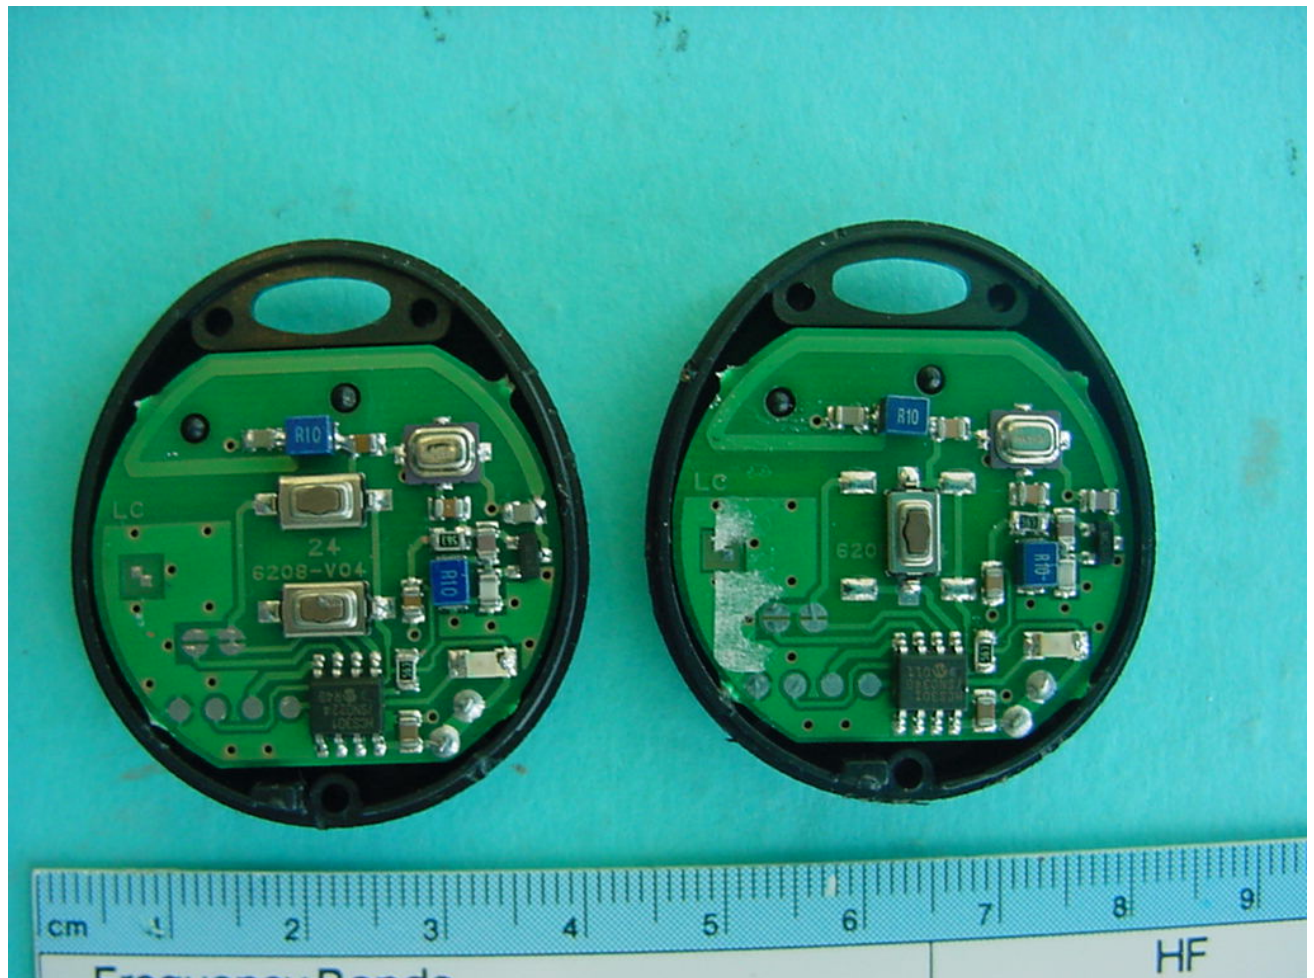

Photographs of the equipment

Photograph no.: 4

