

# Report on the Testing of the Landis + Gyr Technology, Inc. S5-MCM0

In accordance with:  
FCC 47 CFR part 15.247  
ISED RSS-247 Issue 3, August 2023

Prepared for: Landis + Gyr Technology, Inc.  
30000 Mill Creek Ave., Suite 100  
Alpharetta, GA 30022



Add value.  
Inspire trust.

## COMMERCIAL-IN-CONFIDENCE

Document Number: AT721007330.1P2

### SIGNATURE

A handwritten signature in black ink, appearing to read "A. Adusumilli".

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Divya Adusumilli	Wireless Technical Lead TUV SUD America Inc.	Authorized Signatory	06/23/2025

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD America, Inc. document control rules.

FCC Accreditation Designation Number US1233  
FCC Test Site Registration Number 967699  
Innovation, Science, and Economic Development Canada Lab Code 23932

### EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with the standards listed above.



A2LA Cert. No. 2955.09

#### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America.  
© TÜV SÜD.

#### ACCREDITATION

Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.

TÜV SÜD America  
5945 Cabot Parkway, Suite 100  
Alpharetta, GA 30005

Phone: 678-341-5900  
[www.tuv-sud-america.com](http://www.tuv-sud-america.com)

TÜV SÜD

TÜV®



## Contents

<b>1</b>	<b>Report Summary .....</b>	<b>3</b>
1.1	Report Modification Record.....	3
1.2	Introduction.....	3
1.3	Brief Summary of Results .....	5
1.4	Product Information .....	6
1.5	Deviations from the Standard.....	8
1.6	EUT Modification Record .....	8
1.7	Test Location.....	9
<b>2</b>	<b>Test Details .....</b>	<b>10</b>
2.1	Antenna Requirement .....	10
2.2	Peak Output Power .....	11
2.3	Number of Hopping Channels .....	13
2.4	Band-Edge Compliance of RF Conducted Emissions .....	15
2.5	RF Conducted Spurious Emissions .....	20
2.6	Radiated Spurious Emissions into Restricted Frequency Bands.....	22
2.7	Test Equipment Used.....	29
<b>3</b>	<b>Diagram of Test Set-ups .....</b>	<b>30</b>
<b>4</b>	<b>Accreditation, Disclaimers and Copyright.....</b>	<b>32</b>



## 1 Report Summary

### 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

**Table 1.1-1 – Modification Record**

Issue	Description of Change	Date of Issue
0	First Issue	4/10/2025
1	Updated model name MCM0 to MCM0 and product marketing name Focus AXRe to Focus Axei	5/30/2025
2	Antenna gain is updated from 1 dBi to 0 dBi	6/23/2025

### 1.2 Introduction

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations Section 15.247 and Innovation Science and Economic Development Canada's Radio Standards Specification RSS-247 for the tests documented herein to re-evaluate the S5-MCM0 module after implementing FEM changes.

The S5-MCM0 radio module contains 900 MHz radio. The transmission modes and antennas addressed in this report are applicable to the 900 MHz radio.

Applicant	Mr. Raghav Goteti
Manufacturer	Landis + Gyr Technology, Inc.
Applicant's Email Address	<a href="mailto:Raghav.Goteti@landisgyr.com">Raghav.Goteti@landisgyr.com</a>
Model Name & Number(s)	S5-MCM0 & M3429
Product Marketing Name(s)	Focus Axei
Serial Number(s)	NA
FCC ID	R7PNG0R1S7
ISED Certification Number	5294A-NG0R1S7
Hardware Version(s)	RF Mesh: AE RF Mesh IP: AG
Software Version(s)	RF Mesh: S5GS3B-21.20 RF Mesh IP: S5SR3B-24.36
Number of Samples Tested	2
Test Specification/Issue/Date	US Code of Federal Regulation (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2025 ISED Canada Radio Standards Specification: RSS-247 – Digital Transmission Systems (DTSs), Frequency Hopping



Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices, Issue 3, August 2023.

Order Number	721007330
Date of Receipt of EUT	2/3/2025
Start of Test	2/3/2025
Finish of Test	2/19/2025
Related Document(s)	<p>ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device.</p> <p>FCC OET KDB 558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, April 2, 2019</p> <p>US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2025.</p> <p>ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 5, Amendment 1 (March 2019), Amendment 2 (February 2021)</p>



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC Part 15.247 and ISED Canada's RSS-247 is shown below.

**Table 1.3-1: Test Result Summary**

Test Parameter	Test Plan (Yes/No)	Test Result	FCC 47 CFR Rule Part	ISED Canada's RSS	Test Report Page No
Antenna Requirement	Yes	Pass	15.203, 15.204	-----	10
Carrier Frequency Separation	No	Not Tested	15.247(a)(1)	RSS-247 5.1(b)	---
Number of Hopping Channels	Yes	Pass	15.247(a)(1)(i)	RSS-247 5.1(c)	13
Channel Dwell Time	No	Not Tested	15.247(a)(1)(i) 15.247(f)	RSS-247 5.1(c) RSS-247 5.3(a)	---
20 dB Bandwidth	No	Not Tested	15.247(a)(1)(i)	RSS-247 5.1(c)	---
99% Bandwidth	No	Not Tested	-----	RSS-GEN 6.7	---
Peak Output Power	Yes	Pass	15.247(b)(2)	RSS-247 5.4(a)	11
Average Output Power	No	Not Tested	15.247(b)(3)	RSS-247 5.4(a)	---
Band-Edge Compliance of RF Conducted Emissions	Yes	Pass	15.247(d)	RSS-247 5.5	15
RF Conducted Spurious Emissions	Yes	Pass	15.247(d)	RSS-247 5.5	20
Radiated Spurious Emissions into Restricted Frequency Bands	Yes	Pass	15.205, 15.209	RSS-GEN 8.9, 8.10	22
Power Spectral Density	No	Not Tested	15.247(e)	RSS-247 5.2(b)	---
Duty Cycle	No	-----			-----



## 1.4 Product Information

### 1.4.1 Technical Description

The Module (S5-MCM0) is SUB GHZ radio. It operates 902 -928 MHZ radio frequency.

**Table 1.4.1-1 – Wireless Technical Information**

Detail	Description
FCC ID	R7PNG0R1S7
ISED Certification Number	5294A-NG0R1S7
Module Model Name(s) / Number(s)	S5-MCM0 & M3429
PMN(s)	FOCUS Axei
Frequency Range	902 – 928 MHz
Modulation Format	2-FSK, 2-GFSK
*Antenna Type / Description:	PIFA / 0 dBi

Note: “\*” – Declared by the client.

A full description and detailed product specification details are available from the manufacturer.



Figure 1.4.1-1: Front End of the Conducted EUT Module

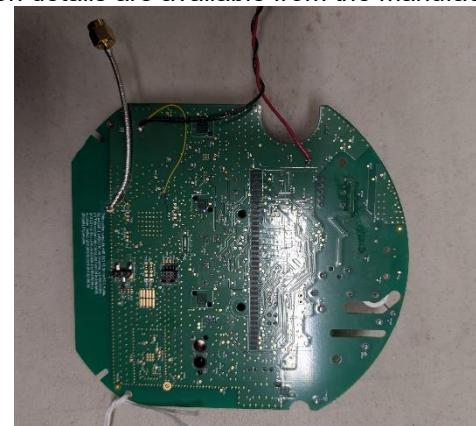



Figure 1.4.1-2: Rear End of the Conducted EUT Module



Figure 1.4.1-3: Front End of the Radiated EUT Module



Figure 1.4.1-4: Rear End of the Radiated EUT Module

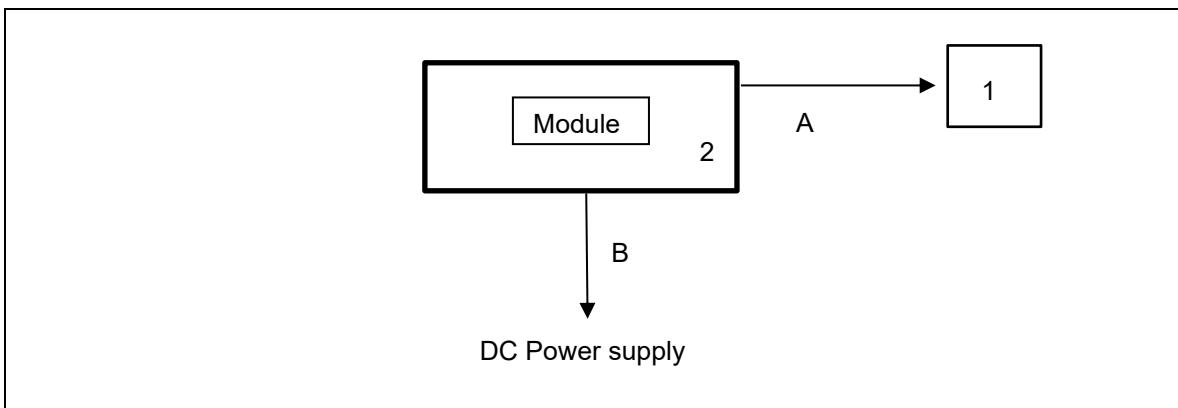

**Figure 1.4.1-5 – Conducted & Radiated Test Setup Block Diagram**

**Table 1.4.1-2 – Cable Descriptions**

Item	Cable/Port	Description
A	USB Serial cable	Programming cable connected to laptop
B	DC Power Supply Cable	Power Supply DC power supply

**Table 1.4.1-3 – Support Equipment Descriptions**

Item	Make/Model	Description
1	Thinkpad	Laptop for configuration
2	Landis & Gyr	Evaluation Board

## 1.4.2 Modes of Operation

The Landis + Gyr S5-MCM0 radio is an electricity metering module which includes a 900 MHz ISM transmitter.

This test report documents the compliance of the 900 MHz Frequency Hopping Spread Spectrum transceiver mode of operation. This model provides distinct proprietary modes of operation using FHSS classifications as outlined below. S5-MCM0 went through with FEM changes, so only limited testing was evaluated and documented.

Mode of Operation	Frequency Range (MHz)	Number of Channels	Channel Separation (kHz)	Stack / Mode	Data Rates (kbps) / Coding Schemes	Classification
1	902.3 – 927.8	86	300	RF Mesh Wideband (FSK)	9.6, 19.2, 38.4	FHSS
2	902.3 – 927.5	85	300	RF Mesh Wideband (FSK)	115.2	FHSS
3	904 – 927.8	239	100	RF Mesh Narrow band (FSK)	9.6, 19.2, 38.4	FHSS
4	902.4 – 927.6	64	400	RF Mesh IP (FSK)	10.0, 20.0, 50.0, 150.0, 200.0	FHSS



### 1.4.3 Monitoring of Performance

For radiated emissions, the EUT was evaluated in three orthogonal orientations. The worst-case orientation was X-position. See test setup photos for more information. The EUT was programmed to generate a continuously modulated signal on each channel evaluated.

For RF conducted measurements, the EUT was connected to the test equipment with a U.fl antenna connector to SMA connector.

The worst-case mode for all parameters measured is listed below:

Mode	Classification	20dB/99% Bandwidth	Number of Hopping Channels	Carrier Frequency Separation	Peak Output Power	Average Output Power	RF Conducted Spurious Emissions	Band-Edge RF Conducted Emissions	RSE into Restricted Frequency Bands	Power Spectral Density
		Data Rate (kbps)								
1	FHSS	*	*	*	9.6,19.2,38.4	NA	9.6	9.6, 38.4	9.6	NA
2	FHSS	**	115.2	**	115.2	NA	**	115.2	**	NA
3	FHSS	**	**	**	**	NA	**	9.6, 38.4	**	NA
4	FHSS	*	*	*	10.0,20.0,50.0,150.0,200.0	NA	10.0	10.0, 200.0	10.0	NA

\* Addressed in original filing

\*\*Addressed by mode 1

Power setting during test: Mode of operation 1, 2, 3 & 4: Power Setting - 270

### 1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

### 1.6 EUT Modification Record

The table below details modifications made to the EUT during the test program. The modifications incorporated during each test are recorded on the appropriate test pages.



Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	Initial State		

The equipment was tested as provided without any modifications.

### 1.7 Test Location

TÜV SÜD conducted the following tests at our Alpharetta, GA test laboratory.

Test Name	Name of Engineer(s)	Accreditation
Antenna Requirement	Bhagyashree Chaudhary	A2LA
Peak Output Power	Bhagyashree Chaudhary	A2LA
Number of Hopping Channels	Bhagyashree Chaudhary	A2LA
Band-Edge Compliance of RF Conducted Emissions	Bhagyashree Chaudhary	A2LA
RF Conducted Spurious Emissions	Bhagyashree Chaudhary	A2LA
Radiated Spurious Emissions into Restricted Frequency Bands	Bhagyashree Chaudhary	A2LA

Office address:

TÜV SÜD America  
5945 Cabot Parkway, Suite 100  
Alpharetta, GA 30005, USA



## 2 Test Details

### 2.1 Antenna Requirement

#### 2.1.1 Specification Reference

FCC Section: 15.203, 15.204

#### 2.1.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

#### 2.1.3 Date of Observation

2/19/2025

#### 2.1.4 Test Method

N/A

#### 2.1.5 Environmental Conditions

N/A

#### 2.1.6 Observation

The EUT utilizes Planar Inverted-F antenna (PIFA) with peak gain 0 dBi for S5-MCM0 which is mounted on the bottom side of the printed circuit board, therefore satisfying the requirements of Section 15.203.



## 2.2 Peak Output Power

### 2.2.1 Specification Reference

FCC Sections: 15.247(b)(2)  
ISED Canada: RSS-247 5.4(a)

### 2.2.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

### 2.2.3 Date of Test

02/03/2025 to 02/19/2025

### 2.2.4 Test Method

The maximum conducted peak output power was measured in accordance with ANSI C63.10 Subclause 7.8.5 Method PKPM (Peak Power meter). The RF output port of the EUT was directly connected to the input of a peak power meter. The resulting peak value was recorded.

### 2.2.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

### 2.2.6 Test Results

**Test Summary: EUT was set to transmit mode as per sections 1.4.2 / 1.4.3.**

**Test Results: Pass**

See data below for detailed results.

**Table 2.2.6-1: RF Output Power**

Frequency [MHz]	Peak Output Power (dBm)	E.I.R.P (dBm)	Data Rate (kbps)	Mode(s)
902.3	27.87	27.87	9.6	1
915	27.74	27.74	9.6	1
927.8	27.69	27.69	9.6	1
902.3	27.85	27.85	19.2	1
915	27.73	27.73	19.2	1
927.8	27.69	27.69	19.2	1
902.3	27.86	27.86	38.4	1
915	27.74	27.74	38.4	1
927.8	27.69	27.69	38.4	1
902.3	27.86	27.86	115.2	2
915	27.74	27.74	115.2	2
927.5	27.71	27.71	115.2	2
902.4	27.94	27.94	10	4
915.2	27.79	27.79	10	4
927.6	27.62	27.62	10	4
902.4	27.95	27.95	20	4
915.2	27.79	27.79	20	4
927.6	27.62	27.62	20	4
902.4	27.95	27.95	50	4
915.2	27.79	27.79	50	4
927.6	27.62	27.62	50	4
902.4	27.96	27.96	150	4
915.2	27.81	27.81	150	4
927.6	27.63	27.63	150	4
902.4	27.97	27.97	200	4
915.2	27.81	27.81	200	4
927.6	27.64	27.64	200	4



## 2.3 Number of Hopping Channels

### 2.3.1 Specification Reference

FCC Sections: 15.247(a)(1)(i)  
ISED Canada: RSS 247 5.1 (c)

### 2.3.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state “0”, as noted in §1.6.

### 2.3.3 Date of Test

02/19/2025

### 2.3.4 Test Method

The RF output port of the EUT was directly connected to the input of the spectrum analyzer with suitable attenuation. The span of the spectrum analyzer was set wide enough to capture the frequency band of operation. The RBW was set to less than 30% of the channel spacing or the 20dB bandwidth, whichever is smaller. The VBW was set to  $\geq$  RBW.

### 2.3.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

### 2.3.6 Test Results

**Test Summary: EUT was set to transmit mode as per sections 1.4.2 / 1.4.3.**

**Test Results: Pass**

See below plots for detailed results.

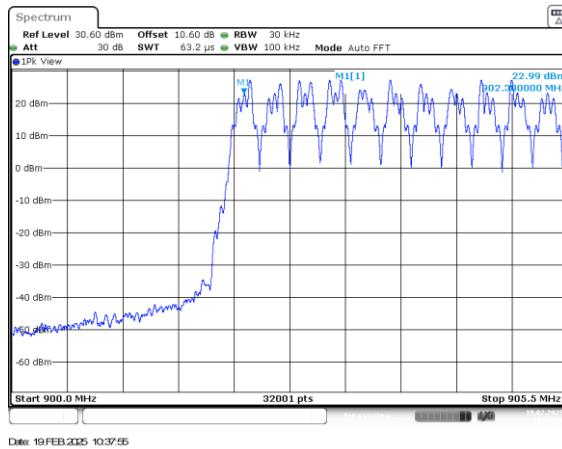


Figure 2.3.6-1: Mode 2 – 115.2 kbps (85 Channels)

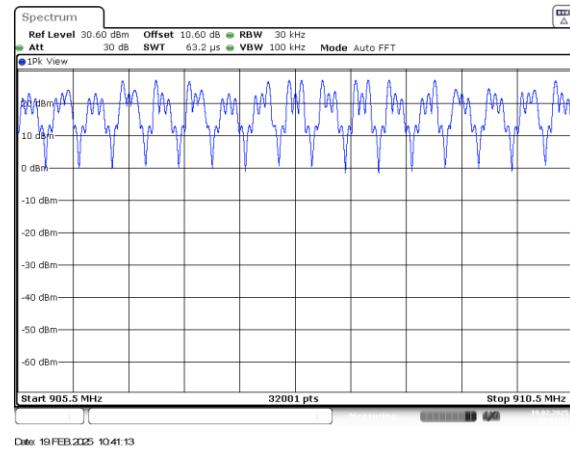


Figure 2.3.6-2: Mode 2 – 115.2 kbps (85 Channels)

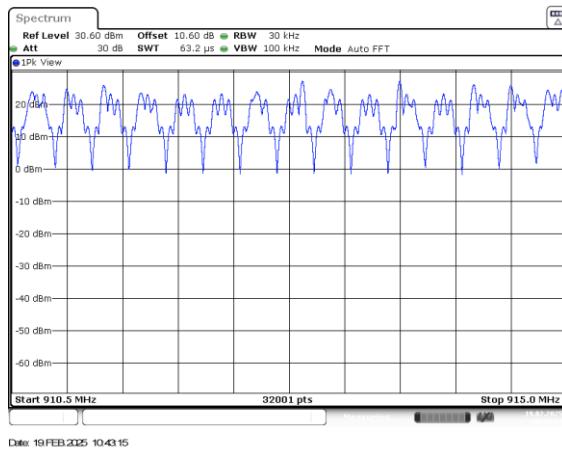


Figure 2.3.6-3: Mode 2 – 115.2 kbps (85 Channels)

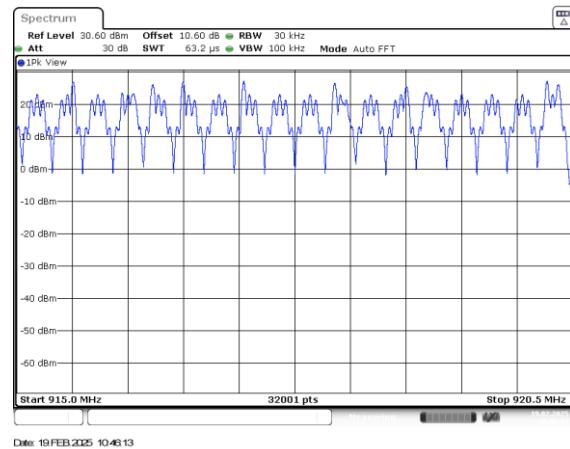


Figure 2.3.6-4: Mode 2 – 115.2 kbps (85 Channels)

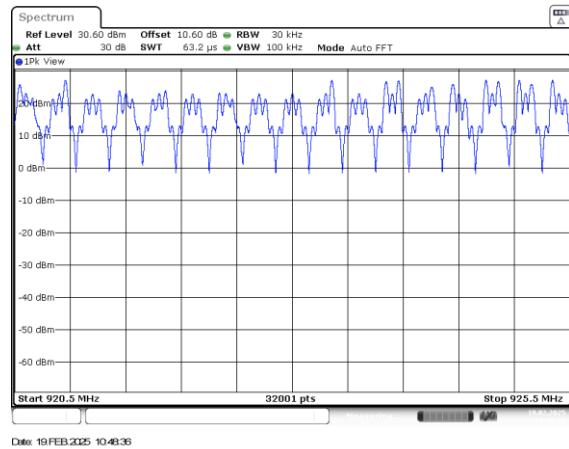


Figure 2.3.6-5: Mode 2 – 115.2 kbps (85 Channels)

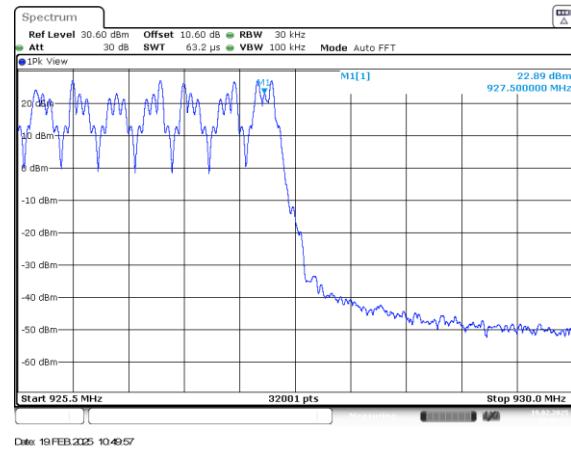


Figure 2.3.6-6: Mode 2 – 115.2 kbps (85 Channels)



## 2.4 Band-Edge Compliance of RF Conducted Emissions

### 2.4.1 Specification Reference

FCC Sections: 15.247(d)  
ISED Canada: RSS-247 5.5

### 2.4.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

### 2.4.3 Date of Test

02/03/2025 to 02/19/2025

### 2.4.4 Test Method

The RF output port of the EUT was directly connected to the input of the spectrum analyzer with suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement, the spectrum analyzer's RBW was set to 100kHz and the VBW was set to 300kHz.

If the maximum peak conducted output power procedure was used to determine compliance, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

If maximum conducted (average) output power was used to determine compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

### 2.4.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

### 2.4.6 Test Results

**Test Summary: EUT was set to transmit mode as per sections 1.4.2 / 1.4.3.**

**Test Results: Pass**

See data below for detailed results.



## HOPPING MODE:

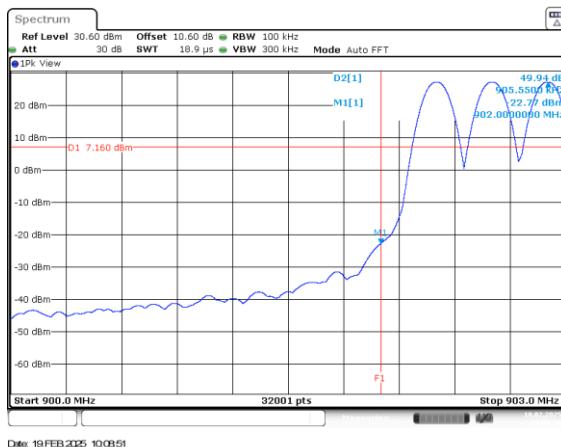


Figure 2.4.6-1: Lower Band edge – Mode 1 – 9.6kbps

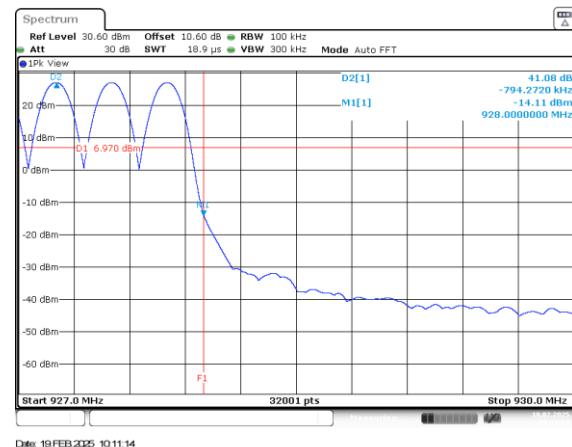


Figure 2.4.6-2: Upper Band edge – Mode 1 – 9.6kbps

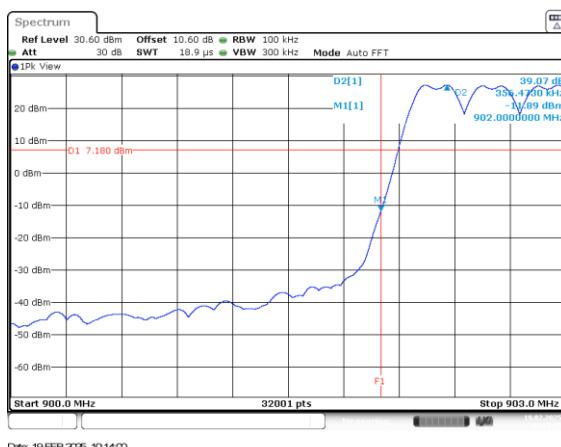


Figure 2.4.6-3: Lower Band edge – Mode 2 – 115.2kbps



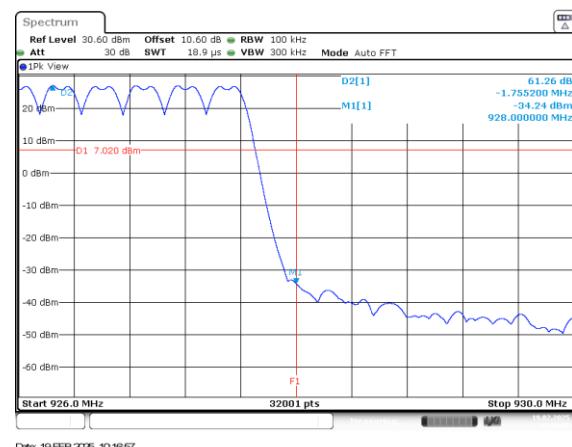


Figure 2.4.6-4: Upper Band edge – Mode 2 – 115.2kbps

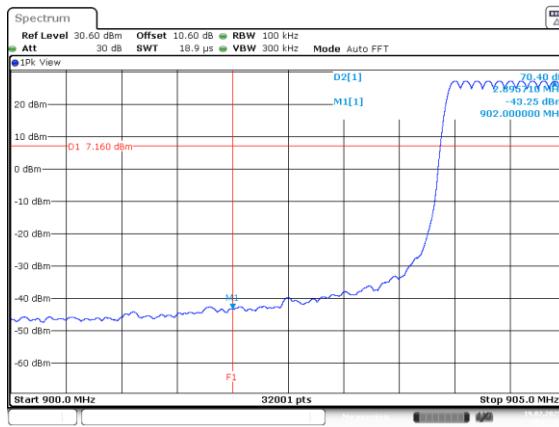


Date: 19 FEB 2025 10:21:12

Figure 2.4.6-5: Lower Band edge – Mode 3 – 9.6kbps

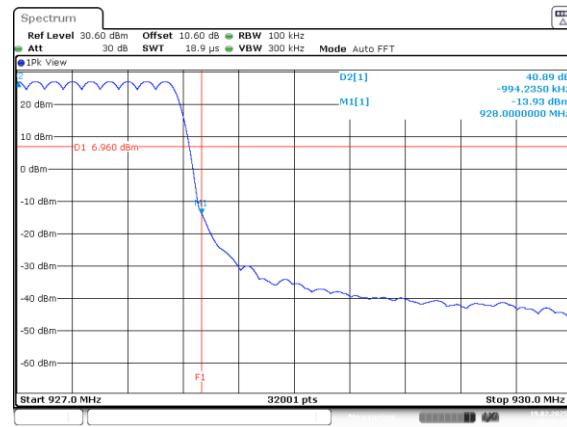


Date: 19 FEB 2025 10:23:47

Figure 2.4.6-6: Upper Band edge – Mode 3 – 9.6kbps

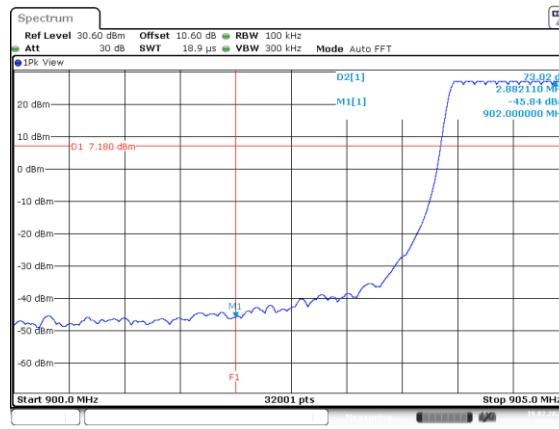

Date: 19 FEB 2025 10:28:43

Figure 2.4.6-7: Lower Band edge – Mode 3 – 38.4kbps

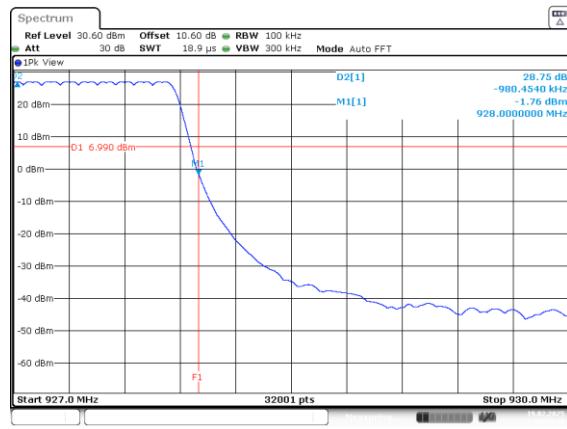

Date: 19 FEB 2025 10:29:16

Figure 2.4.6-8: Upper Band edge – Mode 3 – 38.4kbps



### NON-HOPPING MODE:

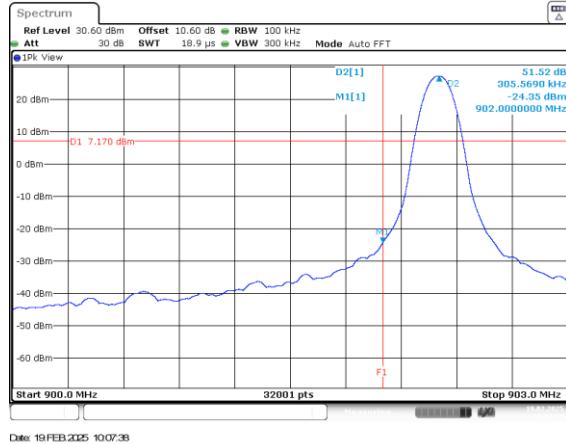


Figure 2.4.6-9: Lower Band edge – Mode 1 – 9.6kbps

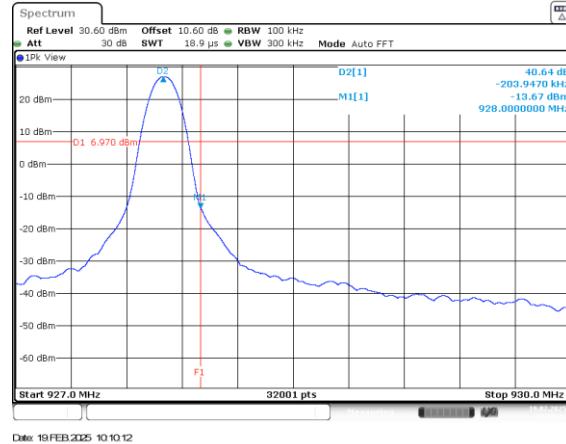


Figure 2.4.6-10: Upper Band edge – Mode 1 – 9.6kbps

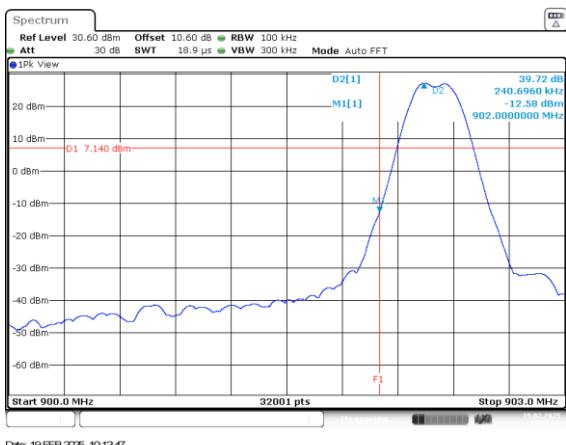


Figure 2.4.6-11: Lower Band edge – Mode 2 – 115.2kbps

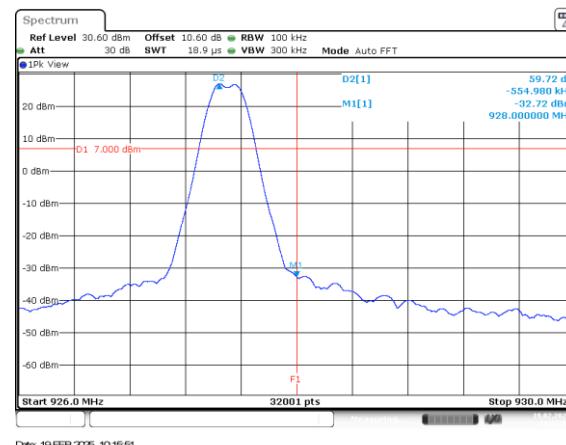


Figure 2.4.6-12: Upper Band edge – Mode 2 – 115.2kbps

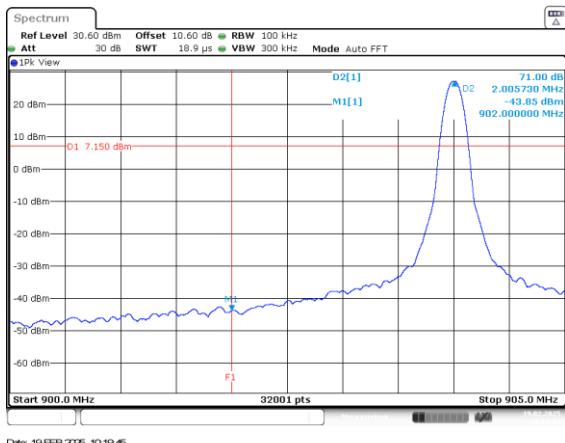


Figure 2.4.6-13: Lower Band edge – Mode 3- 9.6kbps

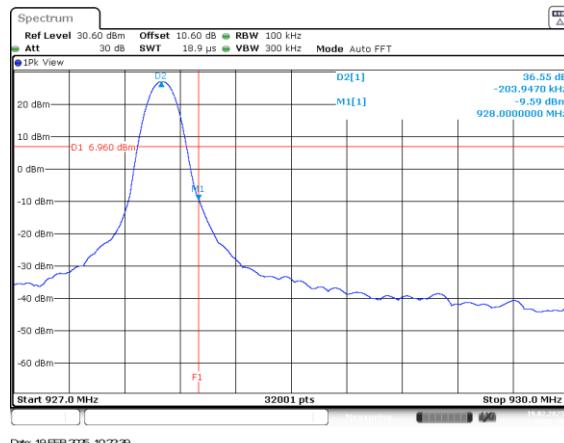


Figure 2.4.6-14: Upper Band edge – Mode 3- 9.6kbps

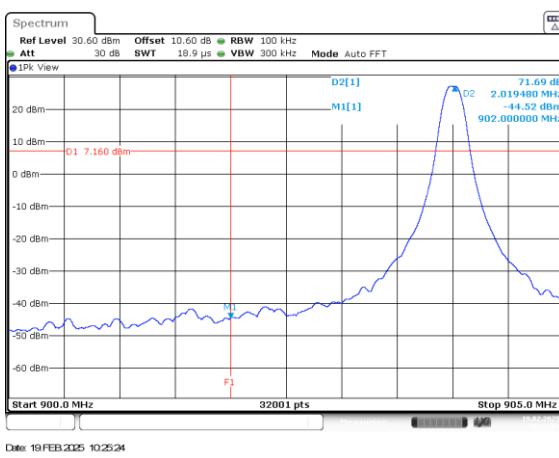


Figure 2.4.6-15: Lower Band edge – Mode 3- 38.4kbps

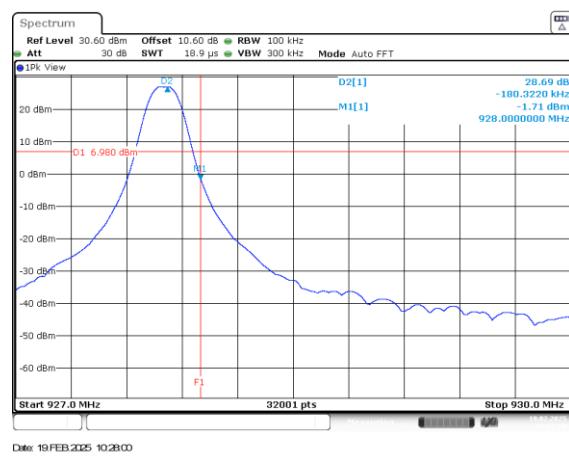


Figure 2.4.6-16: Upper Band edge – Mode 3 – 38.4kbps



## 2.5 RF Conducted Spurious Emissions

### 2.5.1 Specification Reference

FCC Sections: 15.247(d)  
ISED Canada: RSS-247 5.5

### 2.5.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

### 2.5.3 Date of Test

02/03/2025 to 02/19/2025

### 2.5.4 Test Method

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30MHz to 10 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center, and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100kHz. A peak detector function was used with the trace set to max hold.

If the maximum peak conducted output power procedure was used to determine compliance, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

If maximum conducted (average) output power was used to determine compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

### 2.5.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

### 2.5.6 Test Results

**Test Summary: EUT was set to transmit mode as per sections 1.4.2 / 1.4.3.**

**Test Results: Pass**

See data below for detailed results.

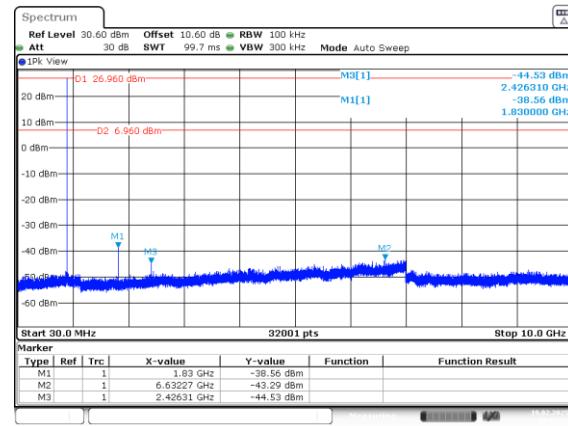
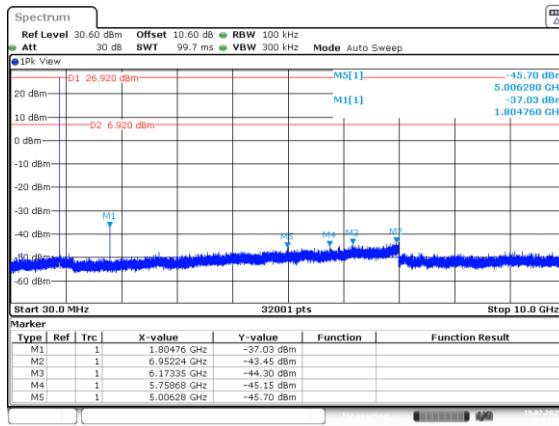


Figure 2.5.6-1: 30MHz – 10GHz – LCH – Mode 1 – 9.6kbps

Figure 2.5.6-2: 30MHz – 10GHz – MCH – Mode 1 – 9.6kbps

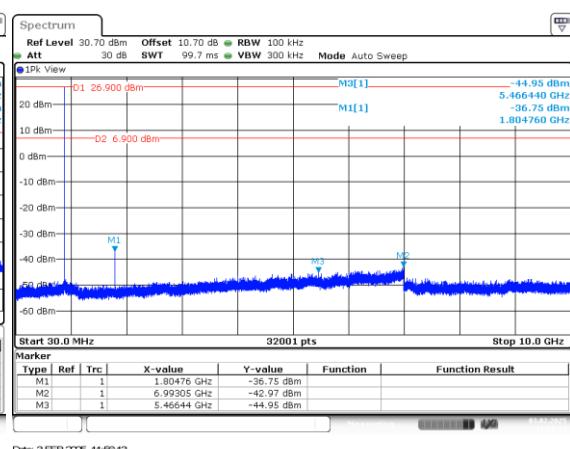
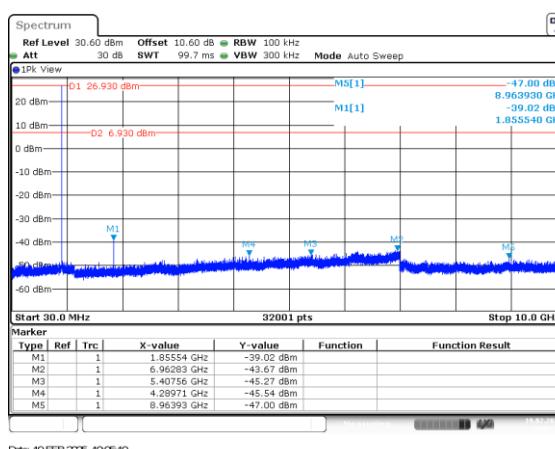


Figure 2.5.6-3: 30MHz – 10GHz – HCH – Mode 1 – 9.6kbps

Figure 2.5.6-4: 30MHz – 10GHz – LCH – Mode 4 – 10kbps


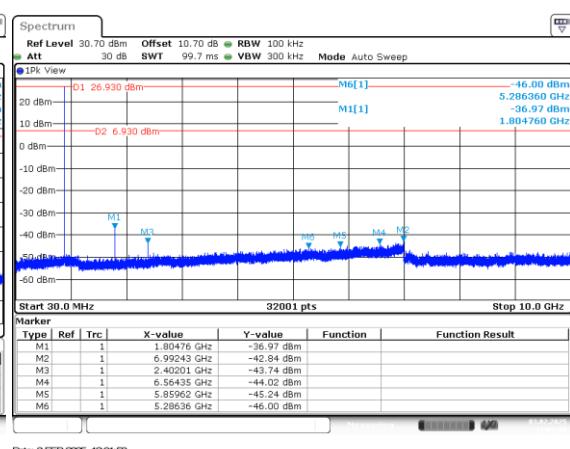


Figure 2.5.6-5: 30MHz – 10GHz – MCH – Mode 4 – 10kbps

Figure 2.5.6-6: 30MHz – 10GHz – HCH – Mode 4 – 10kbps

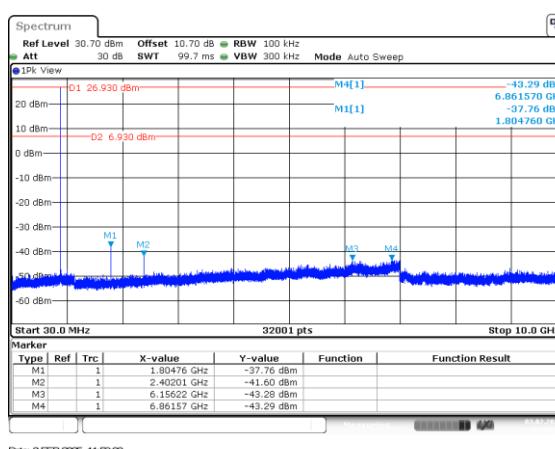

## 2.6 Radiated Spurious Emissions into Restricted Frequency Bands

### 2.6.1 Specification Reference

FCC Sections: 15.205, 15.209.  
ISED Canada: RSS – Gen 8.9/8.10

### 2.6.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state “0”, as noted in §1.6.

### 2.6.3 Date of Test

02/12/2025 to 02/13/2025

### 2.6.4 Test Method

Radiated emissions tests were made over the frequency range of 9 kHz to 10 GHz, 10 times the highest fundamental frequency of 900 MHz. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in Section 15.209.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 150 kHz, quasi-peak measurements were made using a resolution bandwidth RBW of 300 Hz and a video bandwidth VBW of 1 kHz and frequencies between 150 kHz and 30MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 10 kHz and a video bandwidth VBW of 30 kHz. For frequencies between 30 MHz and 1000 MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 100 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak and average measurements were made with RBW of 1 MHz and VBW of 3 MHz.

### 2.6.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar



## 2.6.6 Test Results

**Test Summary:** EUT was set to transmit mode as per sections 1.4.2 / 1.4.3.

**Test Results: Pass**

See data below for detailed results.

**Table 2.6.6-1: Radiated Spurious Emissions Tabulated Data – Mode 1 – 9.6 kbps**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Antenna Height (cm)	Turntable Position (o)	Correction Factors (dB)	Duty Cycle CF	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg						pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>902.3 MHz</b>													
2706.9	60.30	58.50	H	296	205	-1.88	-6.38	58.42	56.62	74.0	54.0	15.6	3.8
2706.9	59.20	56.90	V	194	284	-1.88	-6.38	57.32	55.02	74.0	54.0	16.7	5.4
3609.2	49.6	41.8	H	116	51	-0.21	-6.38	49.39	41.59	74.0	54.0	24.6	18.8
3609.2	47.9	36.6	V	261	107	-0.21	-6.38	47.69	36.39	74.0	54.0	26.3	24.0
4511.5	50	43.2	H	220	124	2.30	-6.38	52.30	45.50	74.0	54.0	21.7	14.9
4511.5	48.3	38.1	V	100	321	2.30	-6.38	50.60	40.40	74.0	54.0	23.4	20.0
5413.8	46.5	35.5	H	106	33	3.46	-6.38	49.96	38.96	74.0	54.0	24.0	21.4
5413.8	45.8	33.6	V	100	52	3.46	-6.38	49.26	37.06	74.0	54.0	24.7	23.3
7218.4	46.8	35.2	H	104	259	4.73	-6.38	51.53	39.93	74.0	54.0	22.5	20.4
7218.4	46.7	34.4	V	112	218	4.73	-6.38	51.43	39.13	74.0	54.0	22.6	21.2
8120.7	50.1	42.2	H	153	153	5.39	-6.38	55.49	47.59	74.0	54.0	18.5	12.8
8120.7	50.4	42.5	V	190	286	5.39	-6.38	55.79	47.89	74.0	54.0	18.2	12.5
<b>915 MHz</b>													
2744.825	57.00	54.20	H	143	211	-1.71	-6.38	55.29	52.49	74.0	54.0	18.7	7.9
2744.825	56.00	53.10	V	121	305	-1.71	-6.38	54.29	51.39	74.0	54.0	19.7	9.0
3659.85	49	38.8	H	212	225	-0.21	-6.38	48.79	38.59	74.0	54.0	25.2	21.8
4574.875	49.9	41.8	H	115	60	1.87	-6.38	51.77	43.67	74.0	54.0	22.2	16.7
4574.875	48.7	39.5	V	100	312	1.87	-6.38	50.57	41.37	74.0	54.0	23.4	19.0
8235.4	48.6	38.5	H	164	222	5.43	-6.38	54.03	43.93	74.0	54.0	20.0	16.4
8235.4	48.5	39.3	V	200	281	5.43	-6.38	53.93	44.73	74.0	54.0	20.1	15.6
<b>927.8 MHz</b>													
2783.075	56.00	52.70	H	143	196	-1.57	-6.38	54.43	51.13	74.0	54.0	19.6	9.2
2783.075	55.90	52.60	V	163	251	-1.57	-6.38	54.33	51.03	74.0	54.0	19.7	9.3
3711.275	48.7	37.2	H	112	255	0.49	-6.38	49.19	37.69	74.0	54.0	24.8	22.7
4639.05	50.5	42.8	H	100	58	2.20	-6.38	52.70	45.00	74.0	54.0	21.3	15.4
4639.05	49.4	41.6	V	195	291	2.20	-6.38	51.60	43.80	74.0	54.0	22.4	16.6
8350.15	48.6	38.4	H	123	261	4.84	-6.38	53.44	43.24	74.0	54.0	20.6	17.1
8350.15	48.4	37.9	V	191	286	4.84	-6.38	53.24	42.74	74.0	54.0	20.8	17.6

### Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

$CF_T$  = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)  
 $R_U$  = Uncorrected Reading  
 $R_C$  = Corrected Level  
 AF = Antenna Factor  
 CA = Cable Attenuation  
 AG = Amplifier Gain  
 DC = Duty Cycle Correction Factor

### Example Calculation: Peak



Corrected Level:  $60.30 + -1.88 = 58.42 \text{ dB}\mu\text{V/m}$   
 Margin:  $74 \text{ dB}\mu\text{V/m} - 58.42 \text{ dB}\mu\text{V/m} = 15.6 \text{ dB}$

### Example Calculation: Average

Corrected Level:  $58.50 + -1.88 = 56.62 \text{ dB}\mu\text{V}$   
 Margin:  $54 \text{ dB}\mu\text{V} - 56.62 \text{ dB}\mu\text{V} - (-6.38) \text{ dB} = 3.8 \text{ dB}$

**Table 2.6.6-2: Radiated Spurious Emissions Tabulated Data – Mode 4 – 10 kbps**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Antenna Height (cm)	Turntable Position (o)	Correction Factors (dB)	Duty Cycle CF	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg						pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>902.4 MHz</b>													
2707.2	56.90	54.10	H	196	229	-1.884	-7.74	55.02	52.22	74.0	54.0	19.0	9.5
2707.2	57.10	54.20	V	100	260	-1.884	-7.74	55.22	52.32	74.0	54.0	18.8	9.4
3609.6	50.2	44	H	191	226	-0.21	-7.74	49.99	43.79	74.0	54.0	24.0	17.9
3609.6	49.3	41.4	V	263	258	-0.21	-7.74	49.09	41.19	74.0	54.0	24.9	20.5
4512	51.6	44.7	H	217	108	2.34	-7.74	53.94	47.04	74.0	54.0	20.1	14.7
4512	50.1	42.7	V	282	201	2.34	-7.74	52.44	45.04	74.0	54.0	21.6	16.7
5414.4	47.3	36.2	H	173	167	3.0006	-7.74	50.30	39.20	74.0	54.0	23.7	22.5
8121.6	50.4	42.2	H	108	326	5.1256	-7.74	55.53	47.33	74.0	54.0	18.5	14.4
8121.6	52.1	46.8	V	201	254	5.1256	-7.74	57.23	51.93	74.0	54.0	16.8	9.8
<b>915.2 MHz</b>													
2745.6	55.50	52.40	H	100	120	-1.71	-7.74	53.79	50.69	74.0	54.0	20.2	11.0
2745.6	56.20	53.20	V	100	260	-1.71	-7.74	54.49	51.49	74.0	54.0	19.5	10.2
3660.8	49.4	41	H	160	229	0.10	-7.74	49.50	41.10	74.0	54.0	24.5	20.6
3660.8	51	44.7	V	180	255	0.10	-7.74	51.10	44.80	74.0	54.0	22.9	16.9
4576	51.5	44.8	H	238	255	1.87	-7.74	53.37	46.67	74.0	54.0	20.6	15.1
4576	49.4	42.1	V	100	298	1.87	-7.74	51.27	43.97	74.0	54.0	22.7	17.8
8236.8	49	39.5	H	143	214	5.43	-7.74	54.43	44.93	74.0	54.0	19.6	16.8
8236.8	49.2	41.8	V	207	293	5.43	-7.74	54.63	47.23	74.0	54.0	19.4	14.5
<b>927.6 MHz</b>													
2782.8	58.60	56.50	H	181	192	-1.57	-7.74	57.03	48.76	74.0	54.0	17.0	13.0
2782.8	57.10	54.50	V	119	245	-1.57	-7.74	55.53	46.76	74.0	54.0	18.5	15.0
3710.4	49	38.8	H	100	305	0.49	-7.74	49.49	31.06	74.0	54.0	24.5	30.7
3710.4	51	44	V	198	255	0.49	-7.74	51.49	36.26	74.0	54.0	22.5	25.5
4638	50.2	43.1	H	184	262	2.20	-7.74	52.40	35.36	74.0	54.0	21.6	26.4
4638	49.3	40.4	V	100	280	2.20	-7.74	51.50	32.66	74.0	54.0	22.5	29.1
8348.4	48.4	38.9	H	111	209	5.01	-7.74	53.41	31.16	74.0	54.0	20.6	30.6
8348.4	48.6	39	V	201	278	5.01	-7.74	53.61	31.26	74.0	54.0	20.4	30.5

### Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

- $CF_T$  = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
- $R_U$  = Uncorrected Reading
- $R_C$  = Corrected Level
- $AF$  = Antenna Factor
- $CA$  = Cable Attenuation
- $AG$  = Amplifier Gain
- $DC$  = Duty Cycle Correction Factor



### Example Calculation: Peak

Corrected Level:  $56.90 + -1.884 = 55.02 \text{ dB}\mu\text{V}/\text{m}$

Margin:  $74 \text{ dB}\mu\text{V}/\text{m} - 55.02 \text{ dB}\mu\text{V}/\text{m} = 19.0 \text{ dB}$

### Example Calculation: Average

Corrected Level:  $54.10 + -1.884 = 52.22 \text{ dB}\mu\text{V}$

Margin:  $54 \text{ dB}\mu\text{V} - 52.22 \text{ dB}\mu\text{V} - (-7.74) \text{ dB} = 9.5 \text{ dB}$



TUV EMC Lab

Radiated Emissions, Under 1GHz


HV Graph

Company - 721007330 L+G

Model - S5-MCMO

Config - 915MHz 10kbps Mesh

Operator - Shree

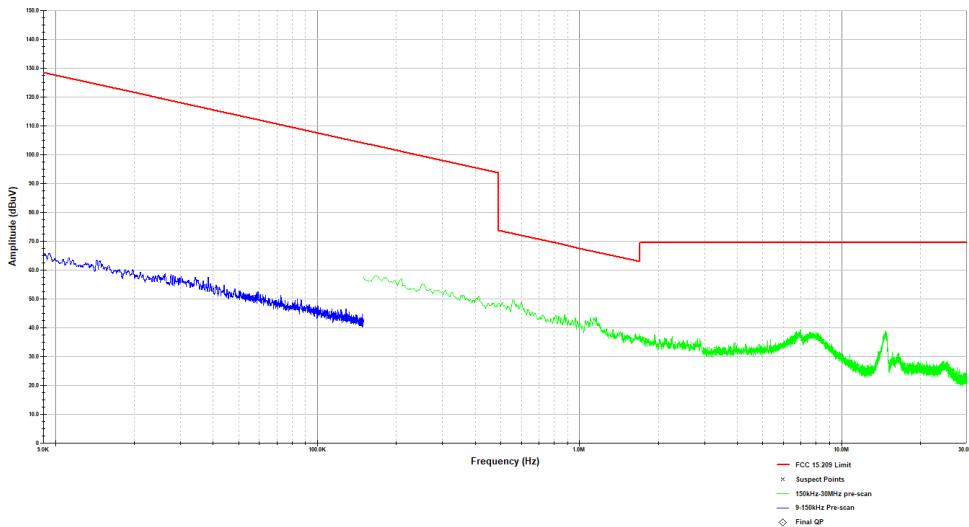

**Figure 1: Reference plot for Radiated Spurious Emissions – 9 kHz – 30 MHz – Mode 1 – MCH – 9.6kbps – Coaxial**

TUV EMC Lab

Radiated Emissions, Under 1GHz

HV Graph

Company - 721007330 L+G


Model - S5-MCMO

Config - 915MHz 10kbps Mesh


Operator - Shree

FCC 15.209 BSAC 9kHz-30MHz BSAC 915MHz co-planer horz.til


Last Data Update 12:14:45 PM, Thursday, February 13, 2025

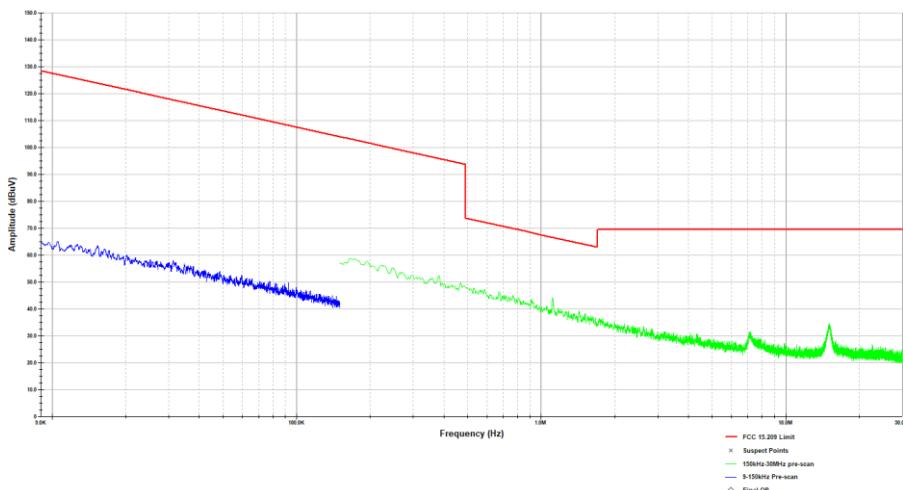

**Figure 2: Reference plot for Radiated Spurious Emissions – 9 kHz – 30 MHz – Mode 1 – MCH – 9.6kbps – Co-planar Horizontal**

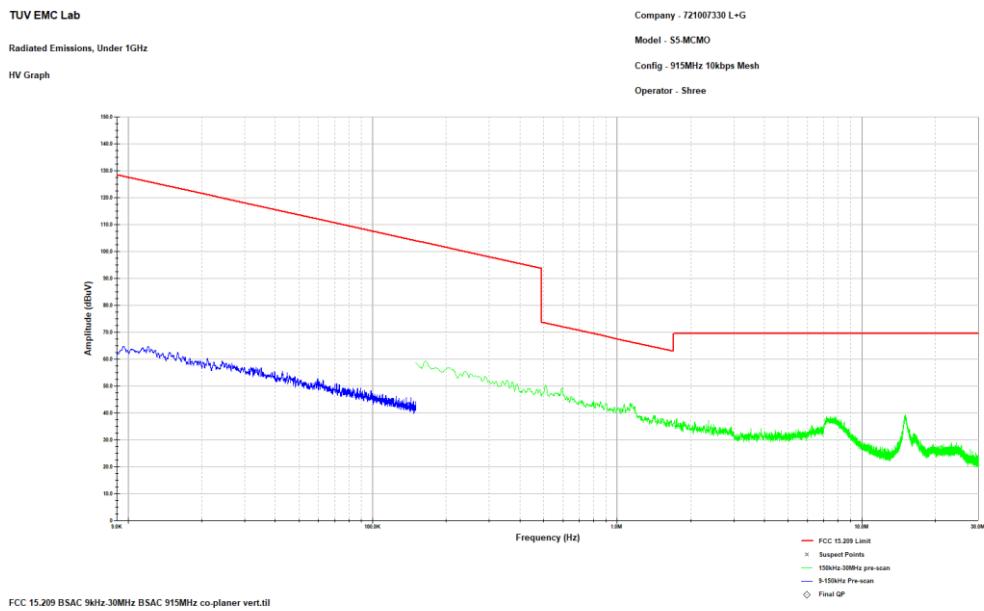


**Figure 3: Reference plot for Radiated Spurious Emissions – 9 kHz – 30 MHz – Mode 1 – MCH – 9.6kbps – Co-planar Vertical**

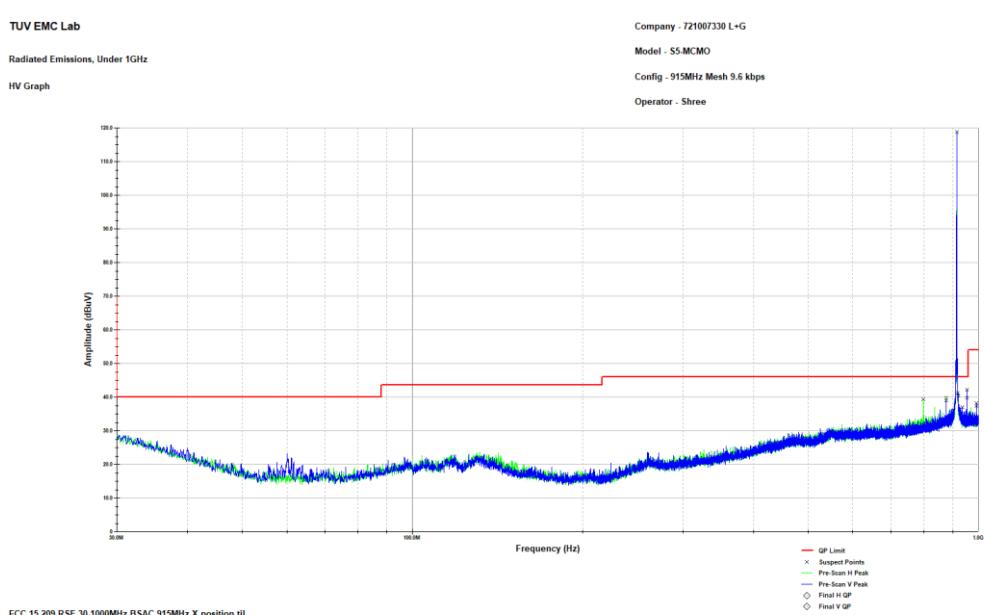


**Figure 4: Reference plot for Radiated Spurious Emissions – 30 MHz – 1 GHz – Mode 1 – MCH – 9.6kbps**

Note: Emission above the limit line was the Fundamental.

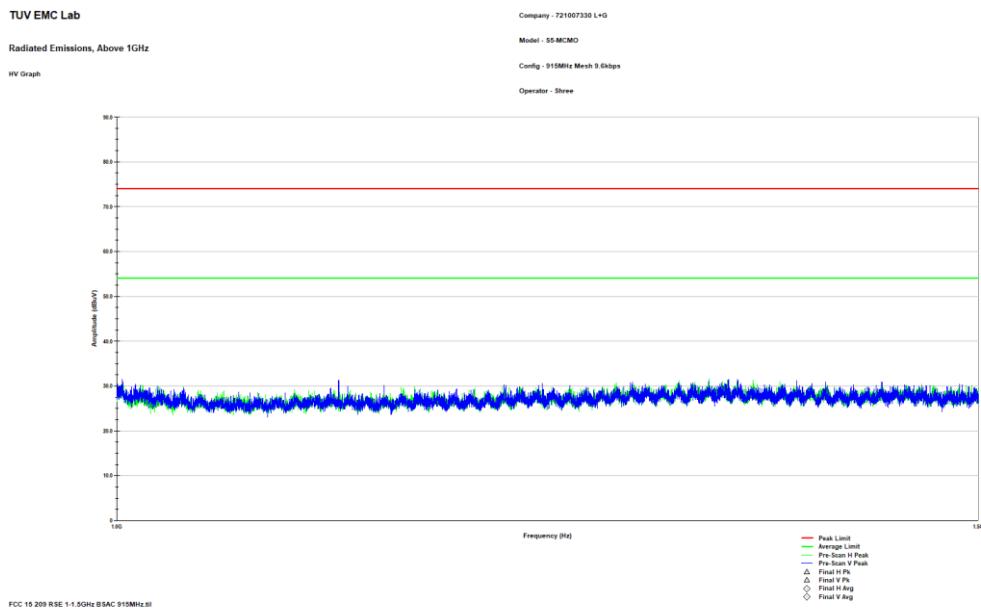

**Figure 5: Reference plot for Radiated Spurious Emissions – 1 GHz – 1.5 GHz – Mode 1 – MCH – 9.6kbps**

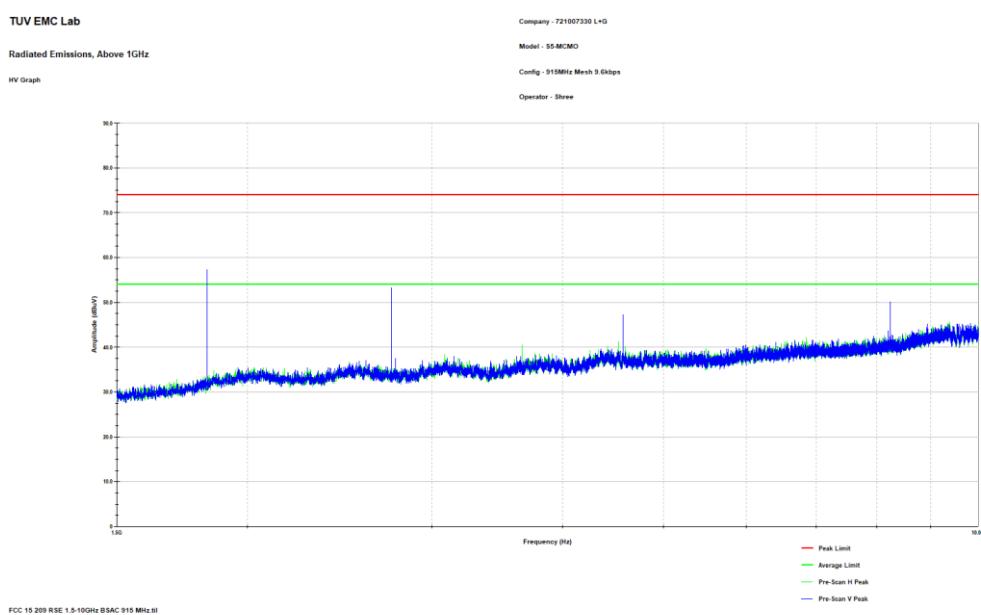

**Figure 6: Reference plot for Radiated Spurious Emissions – 1.5 GHz – 10 GHz – Mode 1 – MCH – 9.6kbps**

Note: Emissions within restricted bands were evaluated.



## 2.7 Test Equipment Used

Table 2.7-1 –Equipment List

Asset ID	Manufacturer	Model	Equipment Type	Serial Number	Last Calibration Date	Calibration Due Date
628	EMCO	6502	Active Loop Antenna 10kHz-30MHz	9407-2877	06/20/2023	06/20/2025
853	Teseq	CBL6112D	BiLog Antenna	51616	7/26/2023	07/26/2025
884	ETS Lindgren (EMCO)	3117	DOUBLE-RIDGED GUIDE ANTENNA	240106	5/16/2023	05/16/2025
AEMC0889	Com Power	PAM 103	Pre-amplifier	18020215	09/30/2024	09/30/2025
338	Hewlett Packard	8449B	High Frequency Pre-Amp	3008A01111	06/18/2024	06/18/2026
882	Rohde & Schwarz	ESW44	ESW44 EMI TEST RECEIVER	101961	6/18/2024	06/18/2025
22	Teledyne Storm Microwave	90-195-456	BSAC Cable	N/A	07/15/2024	07/15/2025
20	Teledyne Storm Microwave	R-90-195-036	BSAC Cable	N/A	07/15/2024	07/15/2025
21	Teledyne Storm Microwave	R-90-195-072	BSAC Cable	N/A	07/15/2024	07/15/2025
337	Microwave Circuits	H1G513G1	Microwave filter	282706	06/03/2024	06/03/2025
827	Rohde & Schwarz	RF Cable set	TS8997 Rack cable set	N/A	01/13/2025	01/13/2026
622	Rohde & Schwarz	FSV40 (v3.40)	FSV Signal Analyzer 10Hz to 40GHz	101338	11/19/2024	11/19/2025
267	Hewlett Packard	N1911A	Power Meter	MY45100129	06/22/2023	06/22/2025
268	Hewlett Packard	N1921A	Power Sensor	MY45240184	08/22/2023	08/22/2025
346	Aero flex /Weinschel	54A-10	10dB Attenuator	T1362	06/20/2024	06/20/2025

N/A – Not Applicable

### 3 Diagram of Test Set-ups



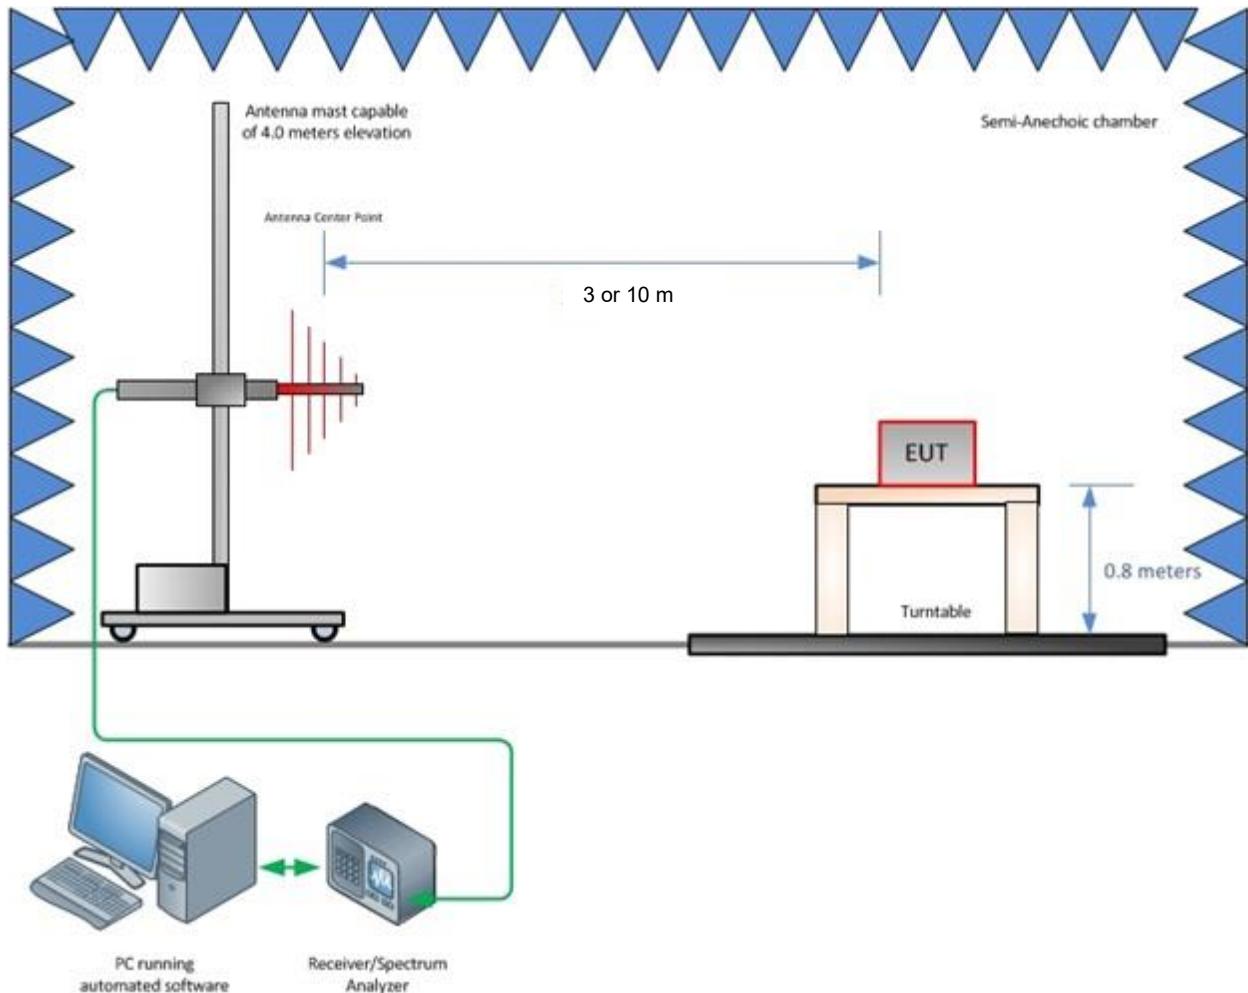


Figure 3-1 – Radiated Emissions Test Setup up to 1 GHz

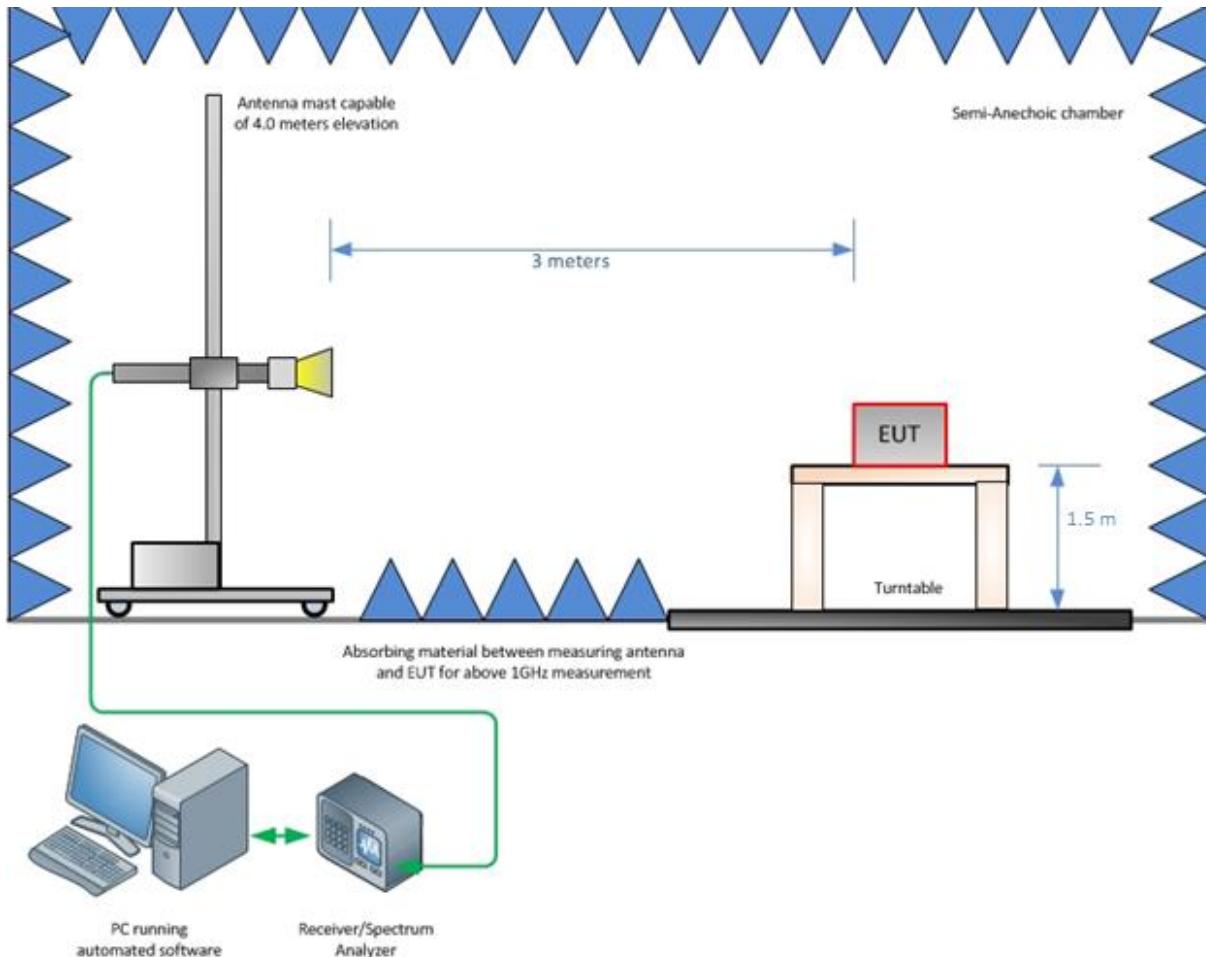

**Figure 3-2 – Radiated Emissions Test Setup above 1 GHz**

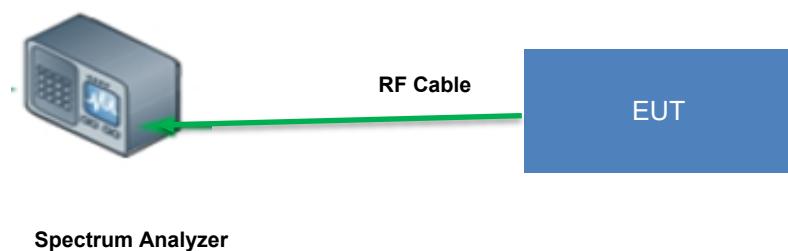

**Figure 3-3 – Conducted Test Setup: Antenna Port measurement**



## 4 Accreditation, Disclaimers and Copyright

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

### STATEMENT OF MEASUREMENT UNCERTAINTY

The expanded laboratory measurement uncertainty figures ( $U_{\text{Lab}}$ ) provided below correspond to an expansion factor (coverage factor)  $k = 1.96$  which provide confidence levels of 95%.

**Table 4-1: Estimation of Measurement Uncertainty**

Parameter	$U_{\text{lab}}$
Occupied Channel Bandwidth	$\pm 0.009 \%$
RF Conducted Output Power	$\pm 0.349 \text{ dB}$
Power Spectral Density	$\pm 0.372 \text{ dB}$
Antenna Port Conducted Emissions	$\pm 1.264 \text{ dB}$
Radiated Emissions $\leq 1 \text{ GHz}$	$\pm 5.814 \text{ dB}$
Radiated Emissions $> 1 \text{ GHz}$	$\pm 4.318 \text{ dB}$
Temperature	$\pm 0.860 \text{ }^{\circ}\text{C}$
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	$\pm 3.360 \text{ dB}$

### TEST EQUIPMENT

All measurement instrumentation is traceable to the National Institute of Standards and Technology and is calibrated to meet test method standard requirements and/or manufacturer's specifications.