

FCC Part 18

Measurement and Test Report

For

Digimore Electronics Co., Ltd

10 FL., No. 61, Yan-Ping S. Rd., Taipei 100, Taiwan

FCC ID: R87-UV-W1586

Test Rule(s):	<u>FCC Part 18</u>
Product Description:	<u>UV SPA Cell Phone Sterilizer with Wireless Charger</u>
Tested Model:	<u>UV-W1586</u>
Report No.:	<u>WTX19X10071608W-1</u>
Sample Receipt Date:	<u>2019-10-17</u>
Tested Date:	<u>2019-10-17 to 2019-10-22</u>
Issued Date:	<u>2019-10-22</u>
Tested By:	<u>Mike Shi / Engineer</u> <i>Mike Shi</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> <i>Jandy So</i>
Prepared By:	

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. CONDUCTED EMISSIONS	9
3.1 STANDARD APPLICABLE.....	9
3.2 TEST PROCEDURE.....	9
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....	9
3.4 ENVIRONMENTAL CONDITIONS	10
3.5 TEST RECEIVER SETUP	10
3.6 SUMMARY OF TEST RESULTS/PLOTS	10
4. RADIATED EMISSIONS.....	13
4.1 TEST PROCEDURE.....	13
4.2 TEST RECEIVER SETUP	13
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	13
4.4 ENVIRONMENTAL CONDITIONS	14
4.5 SUMMARY OF TEST RESULTS/PLOTS	14

Report version

Version No.	Date of issue	Description
Rev.00	2019-10-22	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Digimore Electronics Co., Ltd
Address of applicant: 10 FL., No. 61, Yan-Ping S. Rd., Taipei 100, Taiwan

Manufacturer: JIEJIAN ELECTRONICS CO.,LTD
Address of manufacturer: No. 2 Zhongzhu Industrial Park, TangGan Village,
SanXiang Town ZhongShong City, Quangdon
Province, China

General Description of EUT	
Product Name:	UV SPA Cell Phone Sterilizer with Wireless Charger
Trade Name:	DIGIMORE
Model No.:	UV-W1586
Adding Model(s):	/
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Frequency Range:	110~205kHz
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Input:	DC5V 4.5A/9V 2A
Wireless output:	5W/7.5W/10W
Rated Power:	≤10W (Wireless output)

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless charging	Transmit	Input:DC5V/9V(with a adapter input AC 120V/60Hz)

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	1.0	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	/	A138A-120150U-CN 2	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ± 3.74 dB
		0.15-30MHz ± 3.34 dB
Radiated Emissions	Radiated	30-200MHz ± 4.52 dB
		0.2-1GHz ± 5.56 dB
		1-6GHz ± 3.84 dB
		6-18GHz ± 3.92 dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 18.307 (b)	Conducted Emission	Compliant
§ 18.305 (b)	Radiated Emission	Compliant

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:


Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

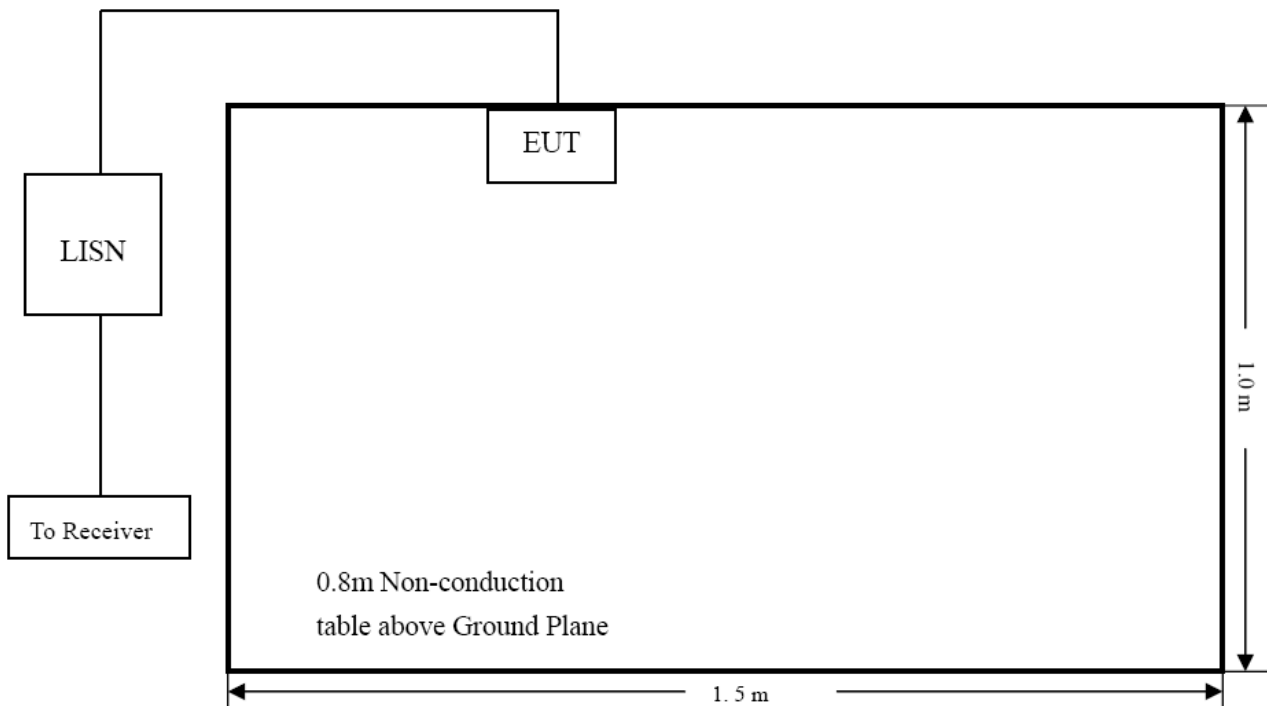

3.4 Environmental Conditions

Temperature:	23.5° C
Relative Humidity:	55%
ATM Pressure:	1016 mbar

3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:


Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

3.6 Summary of Test Results/Plots

According to the data in this section, the EUT complied with the FCC Part 18C Conducted margin for Any non-ISM frequency device, with the *worst* margin reading of:


--8.00 dB at 0.5740 MHz in the Neutral, AVG detector, 0.15-30MHz

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

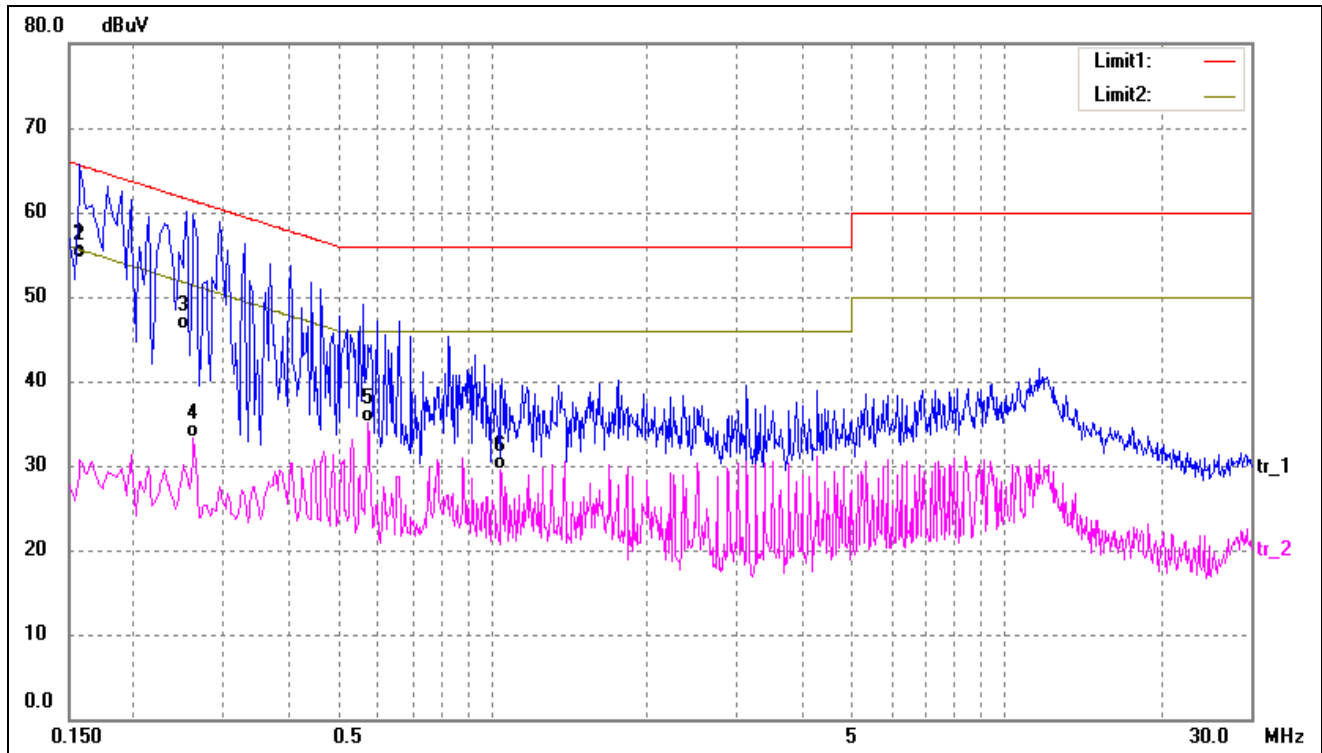

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	44.72	9.95	54.67	65.56	-10.89	QP
2	0.1580	44.59	9.95	54.54	65.56	-11.02	QP
3	0.2540	36.11	10.02	46.13	61.62	-15.49	QP
4	0.2620	23.30	10.02	33.32	51.36	-18.04	AVG
5*	0.5740	25.15	10.04	35.19	46.00	-10.81	AVG
6	1.0420	19.05	10.37	29.42	46.00	-16.58	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

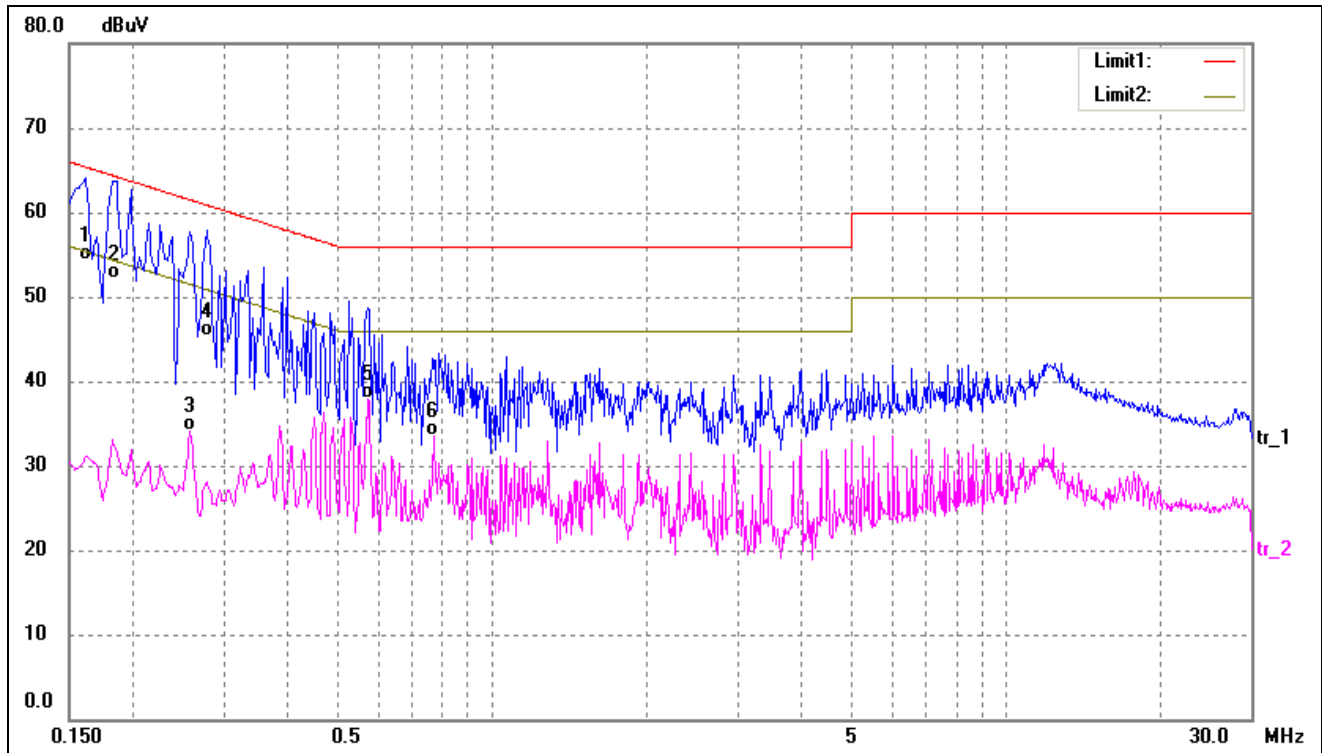


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	44.42	9.95	54.37	65.36	-10.99	QP
2	0.1860	42.19	9.96	52.15	64.21	-12.06	QP
3	0.2580	24.14	10.02	34.16	51.50	-17.34	AVG
4	0.2780	35.29	10.01	45.30	60.88	-15.58	QP
5*	0.5740	27.96	10.04	38.00	46.00	-8.00	AVG
6	0.7700	23.41	10.14	33.55	46.00	-12.45	AVG

4. Radiated Emissions

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

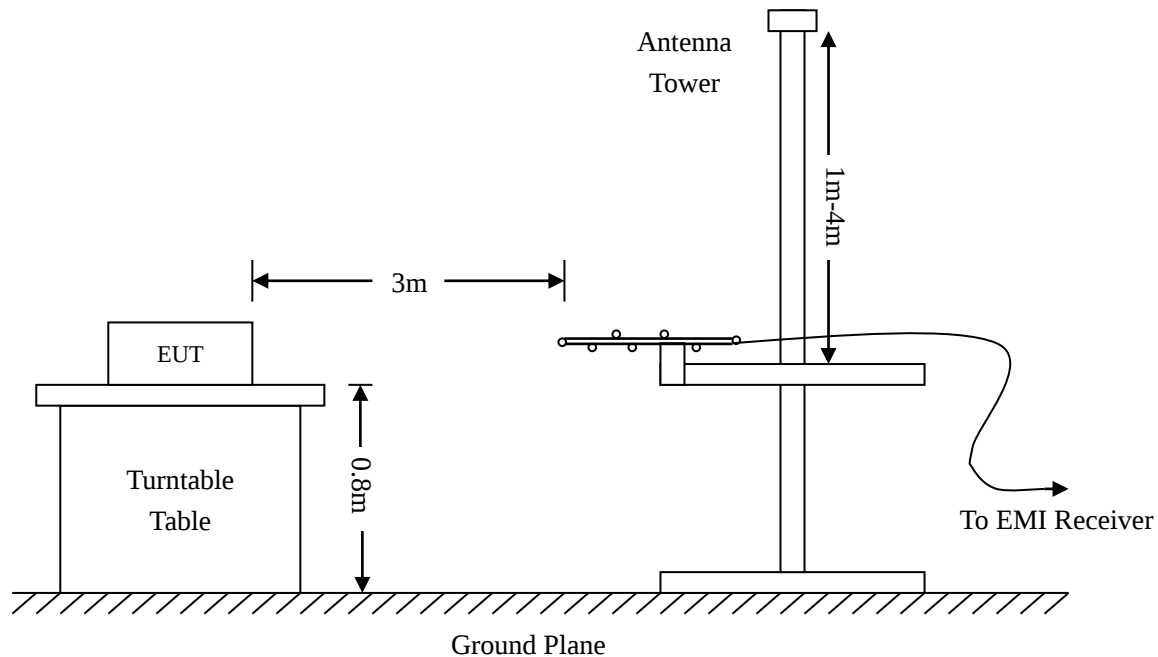

4.2 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$

4.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar


4.5 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 18.305 rule, and had the worst margin of:

-25.77 dB at 64.4331 MHz in the Vertical polarization, TM1 mode, 3Meters

Plot of Radiated Emissions Test Data (Below 30MHz)


Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

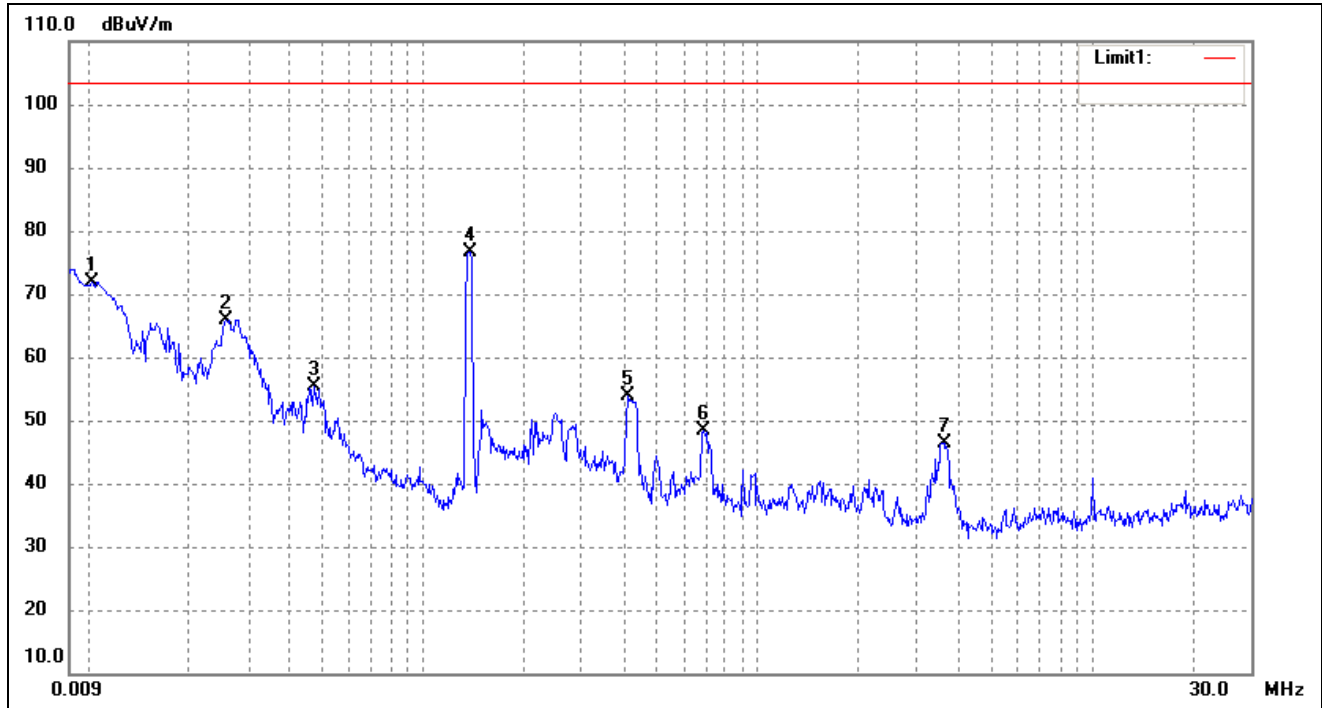

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0103	77.05	-5.07	71.98	103.50	-31.52	251	100	peak
2	0.0258	71.35	-5.37	65.98	103.50	-37.52	92	100	peak
3	0.0473	59.49	-4.16	55.33	103.50	-48.17	360	100	peak
4	0.1381	81.47	-4.75	76.72	103.50	-26.78	94	100	peak
5	0.4104	60.13	-6.33	53.80	103.50	-49.70	87	100	peak
6	0.6898	55.59	-7.14	48.45	103.50	-55.05	182	100	peak
7	3.6034	54.07	-7.59	46.48	103.50	-57.02	251	100	peak


Plot of Radiated Emissions Test Data (Above 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

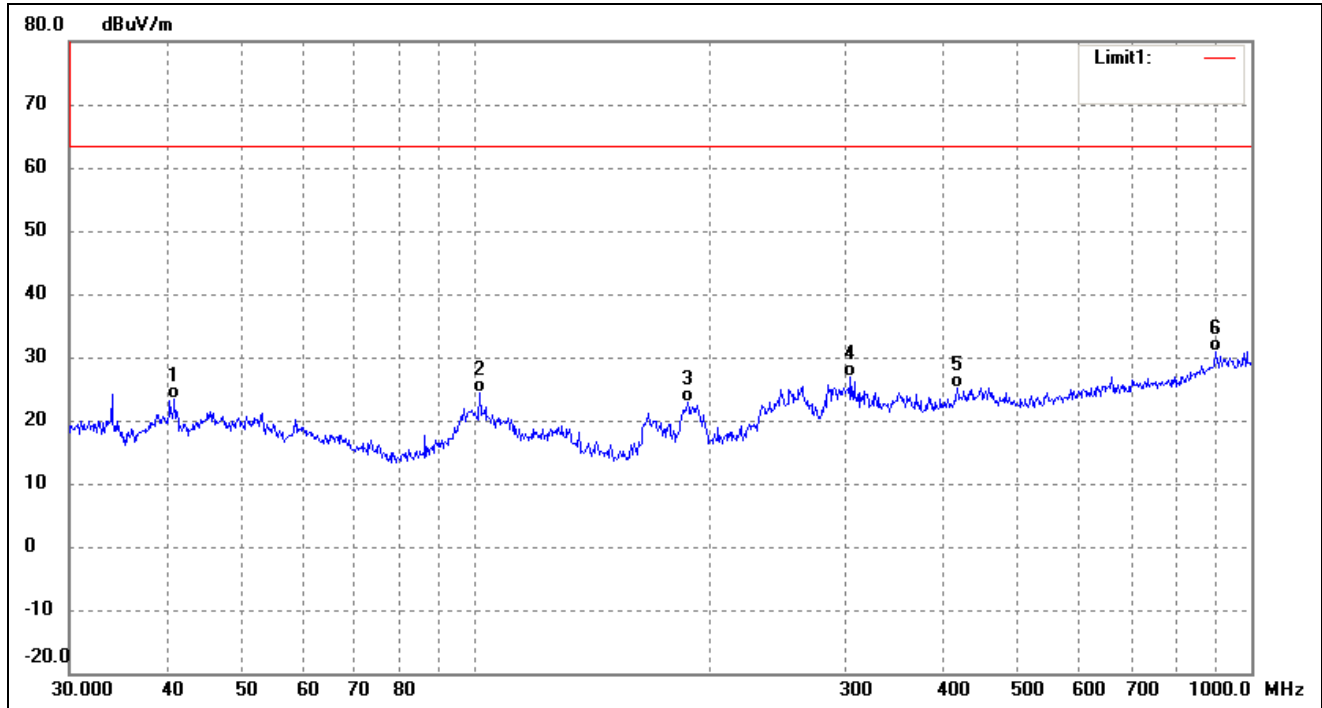

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.9881	37.38	-14.12	23.26	63.50	-40.24	338	100	QP
2	101.2885	39.26	-14.91	24.35	63.50	-39.15	100	100	QP
3	187.7530	38.08	-15.12	22.96	63.50	-40.54	68	100	QP
4	304.6099	37.67	-10.88	26.79	63.50	-36.71	110	100	QP
5	417.6411	34.33	-9.13	25.20	63.50	-38.30	114	100	QP
6	900.1474	32.18	-1.20	30.98	63.50	-32.52	344	100	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

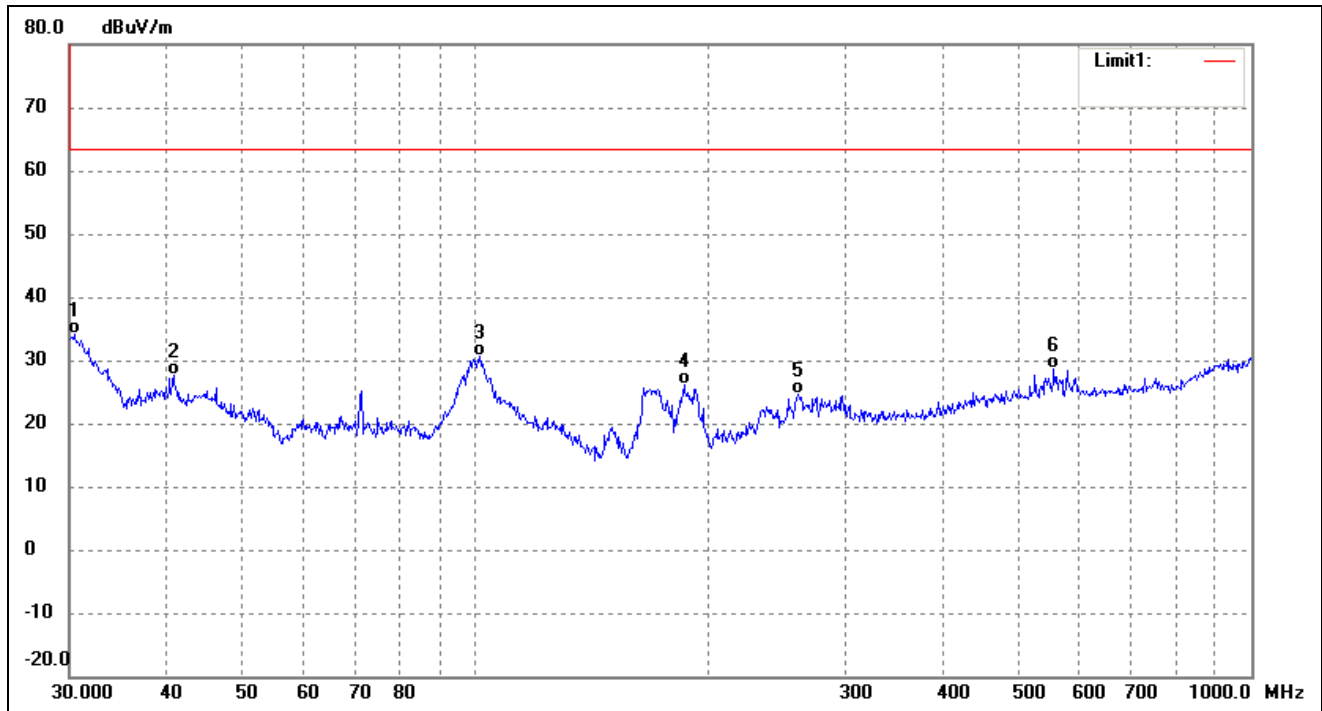

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.4238	50.53	-16.37	34.16	63.50	-29.34	249	100	QP
2	40.8446	41.80	-14.13	27.67	63.50	-35.83	205	100	QP
3	101.2885	45.51	-14.91	30.60	63.50	-32.90	68	100	QP
4	185.7882	41.39	-15.34	26.05	63.50	-37.45	202	100	QP
5	261.0583	37.26	-12.67	24.59	63.50	-38.91	190	100	QP
6	556.7744	35.92	-7.22	28.70	63.50	-34.80	175	100	QP

***** END OF REPORT *****