


## DASDEC-1EN Block diagram

July 14, 2004

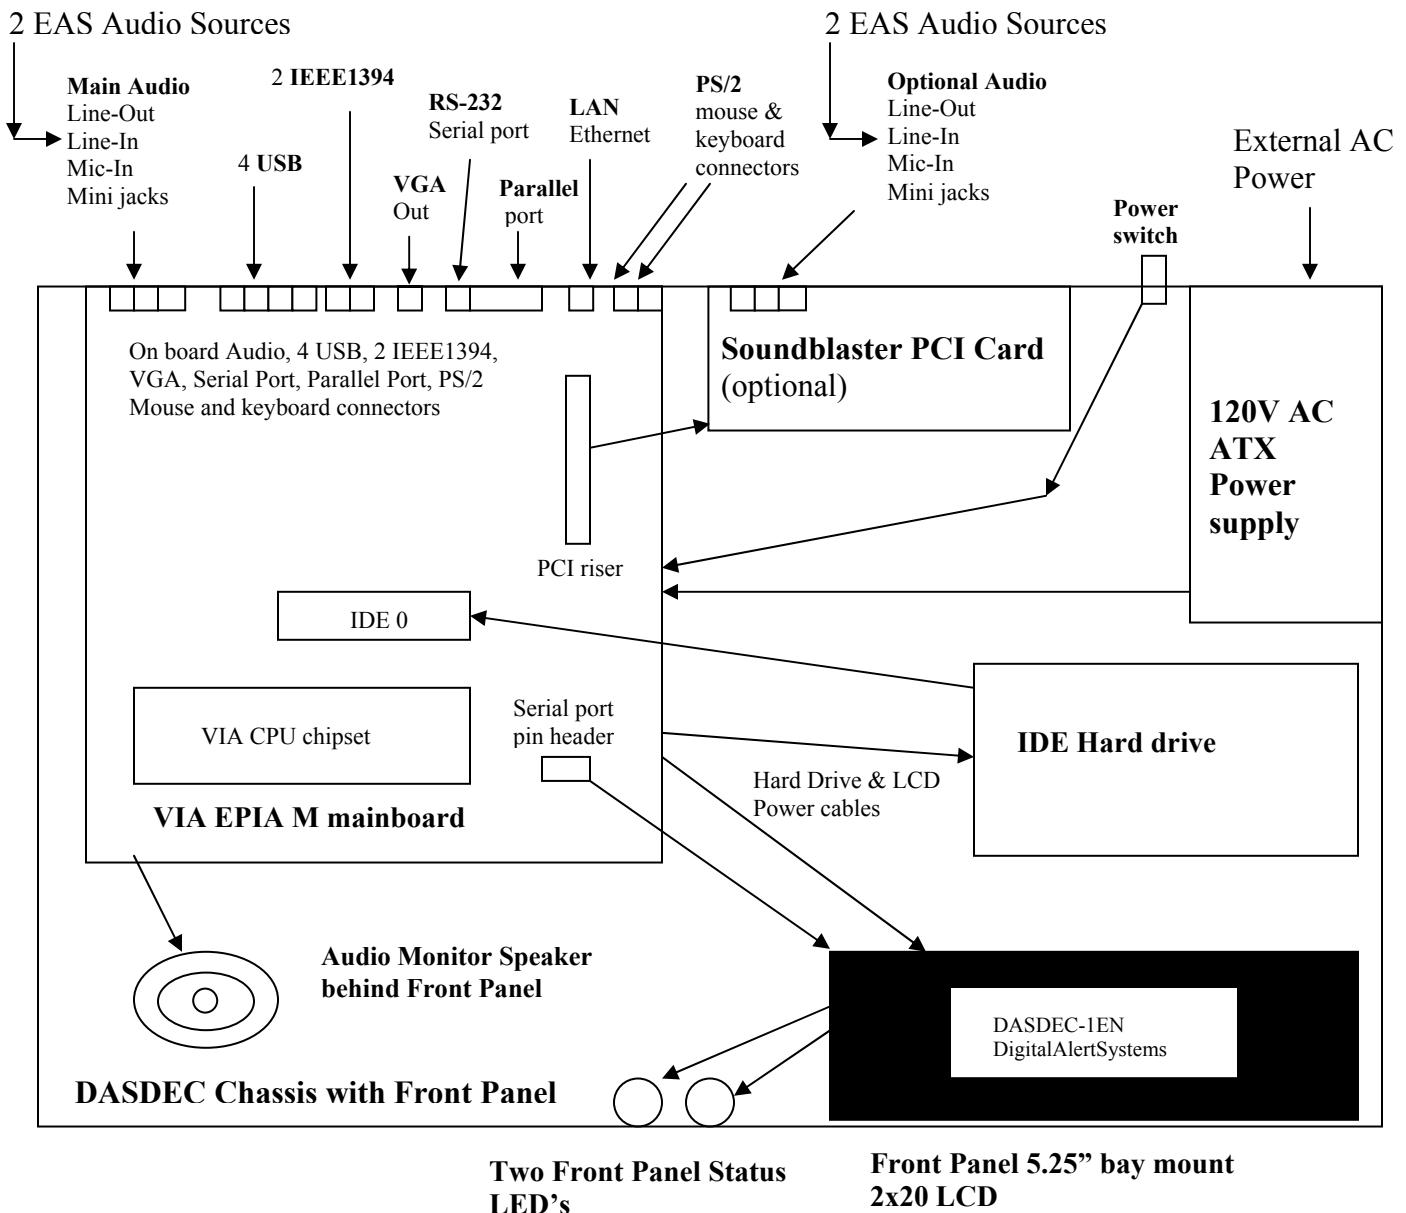

The DASDEC-1EN EAS Encoder/Decoder is a an embedded PC motherboard device that is completely software driven. It is controlled over a LAN or by a desktop browser interface using the built in VGA output, mouse, and keyboard. Two external mono EAS audio sources (from a radio, EAS encoder, soundcard, etc) can be connected to each Audio Line-Input to decode two EAS sources per input. Any audio output can be selected for EAS encoded audio output.