



FCC 47 CFR PART 15 SUBPART C AND ANSI C63.4: 2009

TEST REPORT

For

DJ SYSTEM

Model Number: XDJ-R1

Brand: PIONEER

Issued for

HANPIN ELECTRON CO., LTD

No. 256, SEC.3, CHUNG CHENG ROAD, JEN TEH DISTRICT, TAINAN CITY, TAIWAN, R.O.C.

Issued by

Compliance Certification Services Inc.

Tainan Lab.

No.8,Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

TEL: 886-6-580-2201

FAX: 886-6-580-2202

Issued Date: May 29, 2013



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document



REVISION HISTORY

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 26, 2013	Initial Issue	ALL	Sunny Chang
01	May 24, 2013	Updated test data	Page 5; 13~51; 72-83	Sunny Chang
02	May 28, 2013	Add test plot and updated setup photo	Page 40; 79-81	Sunny Chang
03	May 29, 2013	Updated duty Procedure and plot	Page 39-40	Sunny Chang



TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	6
4. TEST METHODOLOGY	7
5. FACILITIES AND ACCREDITATIONS.....	7
5.1 FACILITIES	7
5.2 EQUIPMENT	7
5.3 LABORATORY ACCREDITATIONS LISTINGS.....	7
5.4 TABLE OF ACCREDITATIONS AND LISTINGS	8
6. CALIBRATION AND UNCERTAINTY.....	9
6.1 MEASURING INSTRUMENT CALIBRATION	9
6.2 MEASUREMENT UNCERTAINTY	9
7. SETUP OF EQUIPMENT UNDER TEST.....	10
7.1 SETUP CONFIGURATION OF EUT	10
7.2 SUPPORT EQUIPMENT	11
7.3 EUT OPERATING CONDITION	12
8. APPLICABLE LIMITS AND TEST RESULTS.....	13
8.1 6DB BANDWIDTH.....	13
8.2 MAXIMUM PEAK OUTPUT POWER	19
8.3 MAXIMUM PERMISSIBLE EXPOSURE	31
8.4 POWER SPECTRAL DENSITY	33
8.5 DUTY CYCLE.....	39
8.6 CONDUCTED SPURIOUS EMISSION	41
8.7 RADIATED EMISSIONS	53
8.8 POWERLINE CONDUCTED EMISSIONS	73
9. ANTENNA REQUIREMENT	77
9.1 STANDARD APPLICABLE.....	77
9.2 ANTENNA CONNECTED CONSTRUCTION.....	77
APPENDIX I SETUP PHOTOS	78
APPENDIX II PHOTOGRAPHS OF EUT.....	A1



1. TEST REPORT CERTIFICATION

Applicant : HANPIN ELECTRON CO., LTD

Address : No. 256, SEC.3, CHUNG CHENG ROAD, JEN TEH DISTRICT, TAINAN CITY, TAIWAN, R.O.C.

Manufacturer : HANCHIH ELECTRONICS(SHENZHEN) CO.,LTD

Address : XINGYE FIRST ROAD 60#, FENGHUANG INDUSTRIAL DISTRICT, FUYONG TOWN, BAOAN COUNTY, SHENZHEN CITY, GUANG DONG PROVINCE, CHINA

Equipment Under Test : DJ SYSTEM

Model Number : XDJ-R1

Brand Name : PIONEER

Date of Test : February 04, 2013 ~ April 23, 2013; May 23 ~ May 24, 2013;
May 28, 2013 ~ May 29, 2013

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC Part 15 Subpart C AND ANSI C63.4 : 2009	No non-compliance noted

Approved by:

Reviewed by:

Jeter Wu
Assistant Manager

Eric Huang
Assistant Section Manager



2. EUT DESCRIPTION

Product Name	DJ SYSTEM
Model Number	XDJ-R1
Brand Name	PIONEER
Received Date	November 16, 2012
Frequency Range	IEEE 802.11b/g (DTS Band):2412MHz~2462MHz
Transmit Power	IEEE 802.11b Mode : 12.93dBm (DTS Band) IEEE 802.11g Mode : 16.04dBm (DTS Band)
Channel Spacing	IEEE 802.11b/g : 5MHz
Channel Number	IEEE 802.11b/g, 802.:11 Channels
Transmit Data Rate	IEEE 802.11 b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps
Type of Modulation	IEEE 802.11b : DSSS with DBPSK, DQPSK and CCK
	IEEE 802.11g : DSSS with DBPSK, DQPSK and CCK, OFDM with BPSK, QPSK, 16QAM and 64QAM
Frequency Selection	By software / firmware
Antenna Type	PCB antenna *1 (1TX1RX) Manufacture: ASIX Electronics Corporation Model: AXM22001-2A-C Gain: 0 dBi Type: Integrated PCB antenna
Power Source	120Vac~ 60Hz, 30W
Temperature Range	0 ~ +40°C

- REMARK:** 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **R8X-XDJR1** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. For more details, please refer to the user manual.



3. DESCRIPTION OF TEST MODES

The EUT is a Pocket Cloud Router.

The RF chipset is manufactured by ASIX Electronics Corporation

The antenna peak gain 0dBi (highest gain) were chosen for full testing.

IEEE 802.11 b ,802.11g mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps long data rates (worst case) were chosen for full testing.

IEEE 802.11g mode: 6Mbps data rates (worst case) were chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD, peak power and average power across all the data rates, bandwidths, modulations and spatial stream modes.



4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 15.207, 15.209 and 15.247 and KDB 558074..

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No.8,Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7:1992, ANSI C63.4: 2009 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW-1037 and 455173).



5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
---------------	------------

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada
Germany	TUV NORD
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site,
<http://www.ccsrf.com>



6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz Test Site : OATS-6	$\pm 3.3456\text{dB}$
Radiated Emission, 200 to 1000 MHz Test Site : OATS-6	$\pm 2.6828\text{dB}$
Radiated Emission, 1 to 8 GHz	$\pm 2.6485\text{dB}$
Radiated Emission, 8 to 18 GHz	$\pm 2.6852\text{dB}$
Radiated Emission, 18 to 26.5 GHz	$\pm 2.6485\text{dB}$
Radiated Emission, 26 to 40 GHz	$\pm 3.0295\text{dB}$
Power Line Conducted Emission	$\pm 1.91\text{dB}$
Band Width	136.49kHz
Peak Output Power MU	$\pm 1.904\text{dB}$
Band Edge MU	$\pm 0.302\text{dBuV}$
Channel Separation MU	361.69Hz
Duty Cycle MU	0.064ms
Frequency Stability MU	0.223kHz


This measurement uncertainty is confidence of approximately 95%, $k=2$




7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

RF Test Setup:

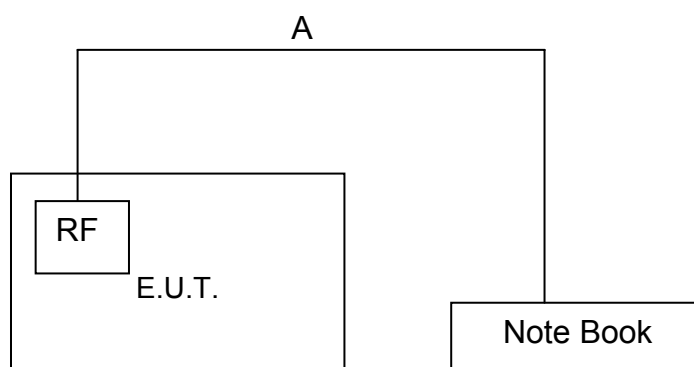

EMI Test Setup:

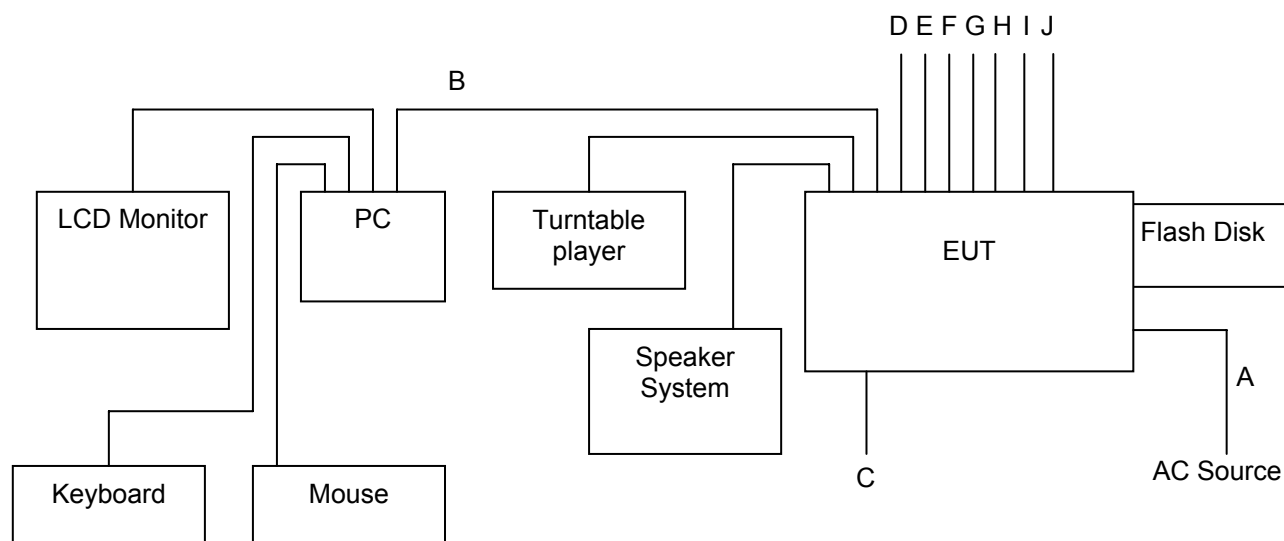



7.2 SUPPORT EQUIPMENT

RF test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1.	Note Book	IBM	T43	DoC	Power cable, unshd, 1.6m

No.	Signal cable description	
A	USB Command	Unshielded, 1.6m, 1pcs.

EMI test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1.	PC	Acer	Aspire M3630	DOC	Power cable, unshd, 1.6m
2.	LCD Monitor	BenQ	FP731	DOC	VGA cable, shd, 1.8m
3.	Keyboard (USB)	DETROIS	KB-2181	DOC	Keyboard cable, shd, 1.4m
4.	Mouse	I-DRIVER	P002	DOC	Mouse cable, shd, 1.4m
5.	Speaker System	Genius	SP-S110	DOC	Audio cable, unshd, 1.6m
6.	Flash Disk	Kingston	DTI/512	DOC	N/A
7.	Turntable Player	HANPIN	DP-300F	DOC	Audio cable, shd. 1.6m

No.	Signal cable description	
A	Power	Unshielded, 2.0m, 1pcs.
B	USB	Shielded, 1.5m, 1pcs. with one core
C	Phones	Shielded, 1.0m, 2pcs.
D	MASTER OUT1	Shielded, 1.0m, 2pcs.
E	MASTER OUT2	Shielded, 1.0m, 1pcs.
F	BOOTH OUT	Shielded, 1.0m, 1pcs.
G	MIC	Shielded, 1.0m, 1pcs.
H	AUX IN	Shielded, 1.0m, 1pcs.
I	PHONO/LINE2	Shielded, 1.0m, 1pcs.
J	PHONO/LINE1	Shielded, 1.0m, 1pcs.

REMARK:

1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7.3 EUT OPERATING CONDITION

Follow the steps:

1.

EUT USB Inserted into the connector NB

2

NB Please install teraterm-4.61.exe

3.

Run "Tera term"

4.

Selection Serial and choose COM Port

5.

Please Press "enter" and Select send file to file transmitting mode

6.

Transmitting Channel and data rate

7.

Stop transmitting Please re-enter keyin ct0

TX Mode:

Tx Mode:CCK 、 OFDM

Tx Data Rate: 1Mbps (IEEE 802.11b mode)

6Mbps (IEEE 802.11g mode)

Power control mode

Target Power: IEEE 802.11b Channel Low (2412MHz)

IEEE 802.11b Channel Middle (2437MHz)

IEEE 802.11b Channel High (2462MHz)

Target Power: IEEE 802.11g Channel Low (2412MHz)

IEEE 802.11g Channel Middle (2437MHz)

IEEE 802.11g Channel High (2462MHz)

RX Mode :

Select send file to file Rx mode

Start test.

Stop receiving press twice to "enter"

Normal Link Setup

1.Set up all computers like the setup diagram.

2.All of the function are under run.

Start test.



8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6DB BANDWIDTH

LIMIT

§ 15.207(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200789	JUL. 01, 2013

TEST SETUP



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 8.1 & 8.2.

Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) ≥ 3 RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW ≥ 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.



TEST RESULTS

No non-compliance noted.

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	10.10	500	PASS
Middle	2437	10.14	500	PASS
High	2462	10.10	500	PASS

NOTE :

1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode



Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16.59	500	PASS
Middle	2437	16.59	500	PASS
High	2462	16.59	500	PASS


NOTE :

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.





6dB BANDWIDTH (802.11b MODE)

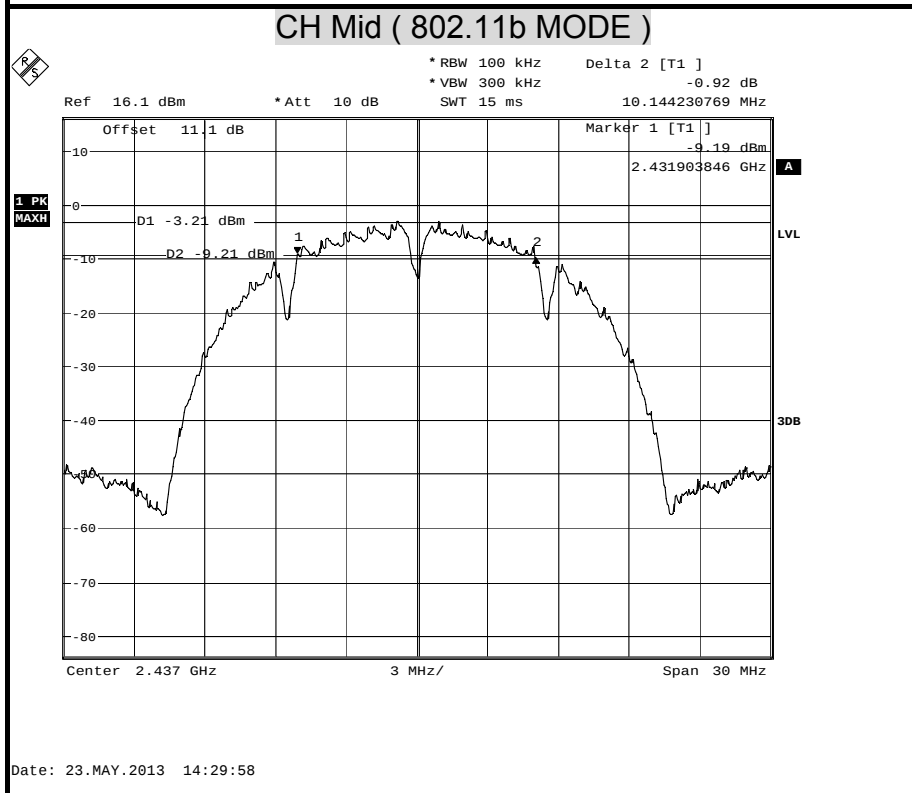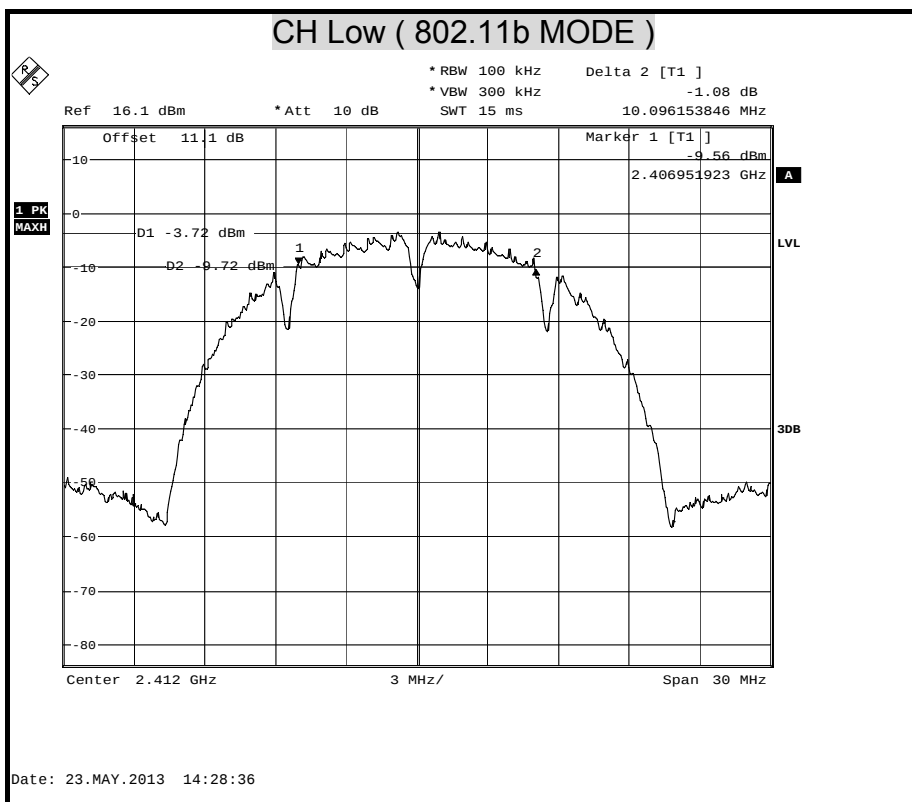


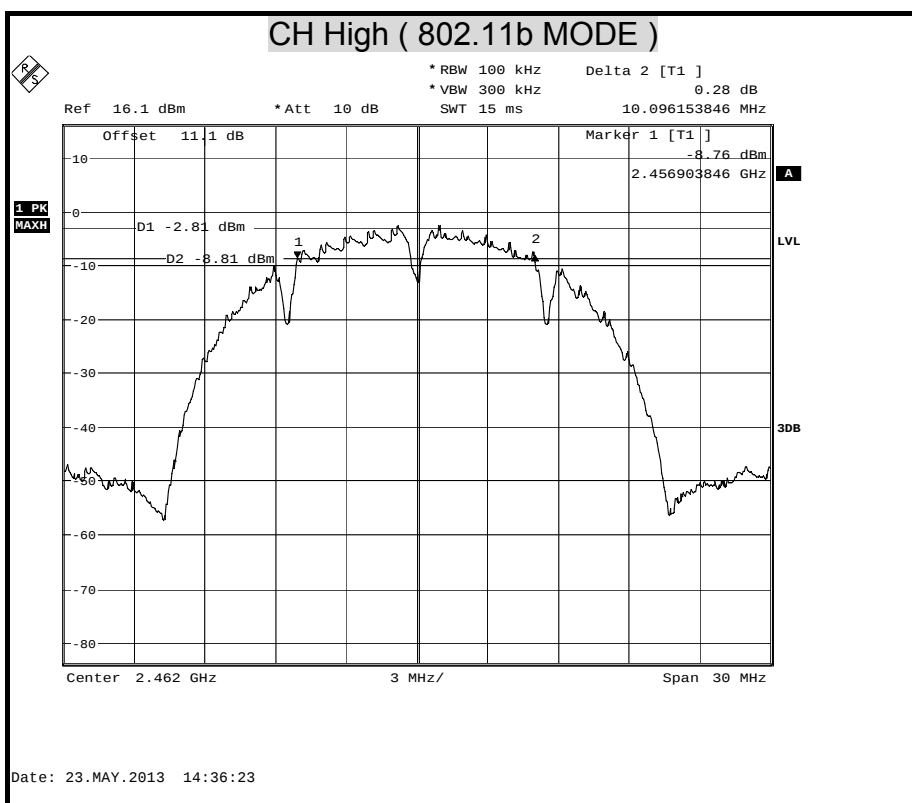



6dB BANDWIDTH (802.11g MODE)

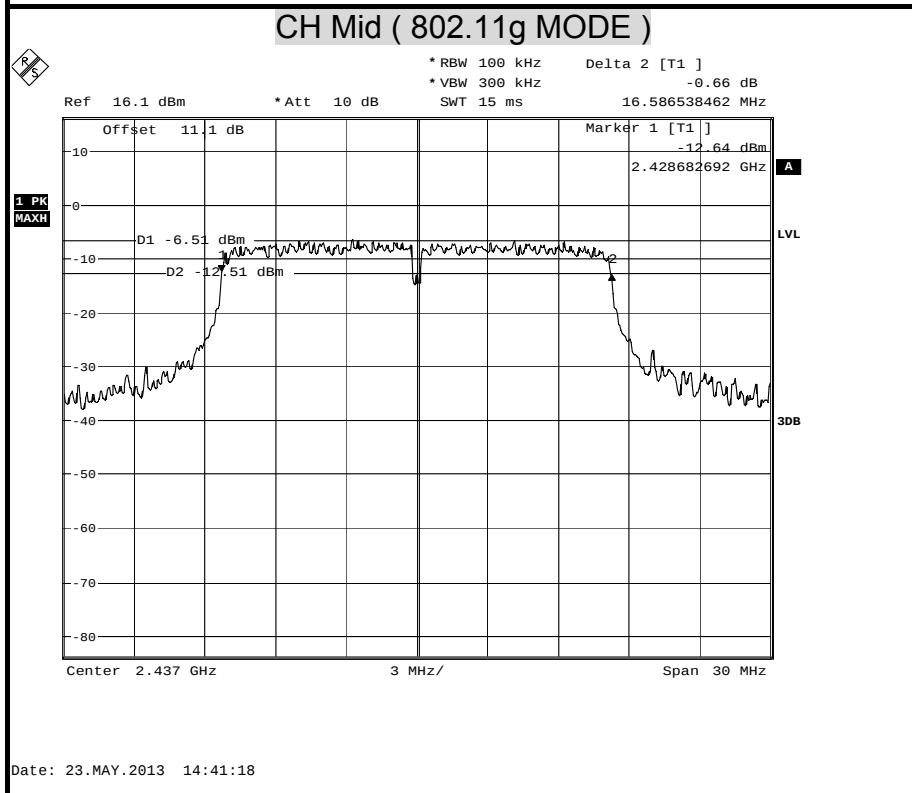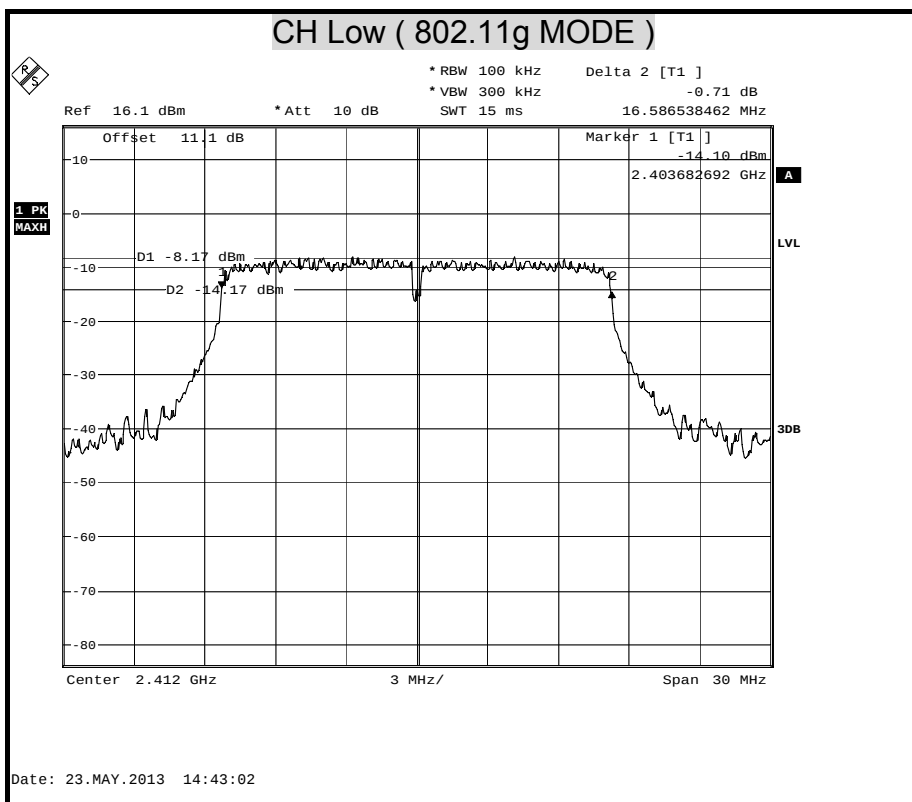

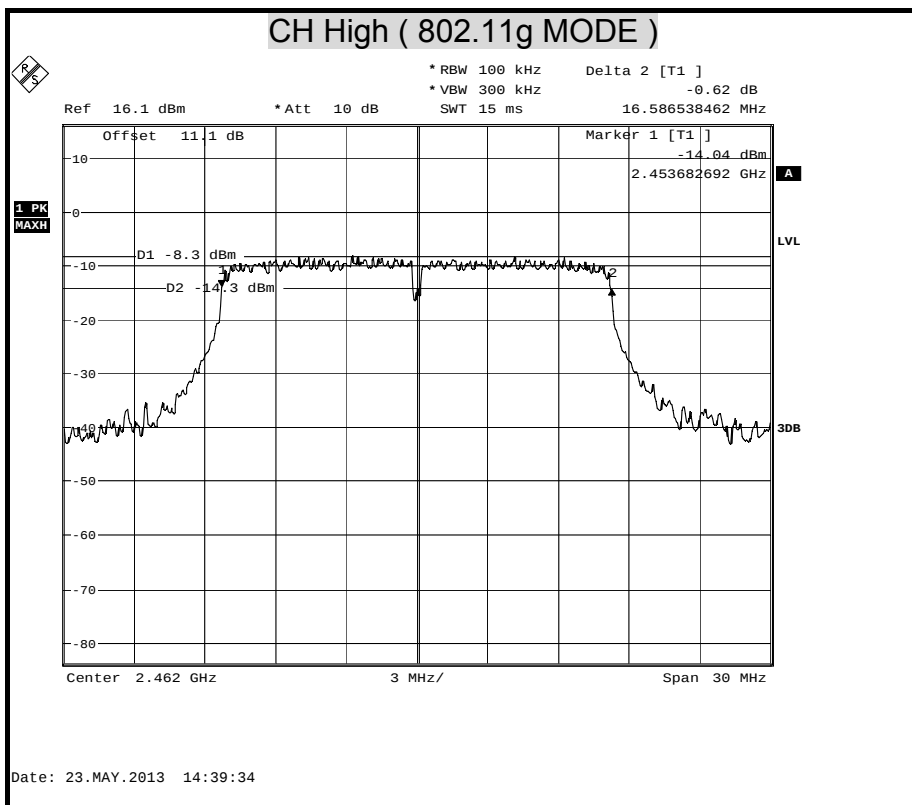



8.2 MAXIMUM PEAK OUTPUT POWER

LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.


§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200789	JUL. 01, 2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP





TEST PROCEDURE

The tests were performed in accordance with KDB 558074 9.1.2 & 9.2.2.3 .

Integrated band power method

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a) Set the RBW = 1 MHz.
- b) Set the VBW ≥ 3 RBW
- c) Set the span $\geq 1.5 \times$ DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

9.2.2.3 Method AVGSA-1 Alternative (RMS detection with slow sweep and EUT transmitting continuously at full power)

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep ≥ 2 span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Manually set sweep time ≥ 10 (number of points in sweep) (transmission symbol period), but not less than the automatic default sweep time.

NOTE— The transmission symbol period (in seconds) is the reciprocal of the symbol rate (in baud or symbols per second). Note that each symbol can represent one or several data bits and thus the symbol rate should not be confused with the gross bit rate (expressed in bits/second). In no case should the sweep time be set less than the auto sweep time.

- f) Set detector = RMS.
- g) The EUT shall be operated at ≥ 98 % duty cycle or sweep triggering/signal gating shall be employed such that the sweep time is less than or equal to the transmission duration T.
- h) Perform a single sweep.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.



IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	12.61	30	PASS
Middle	2437	12.69	30	PASS
High	2462	12.93	30	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	14.24	30	PASS
Middle	2437	16.04	30	PASS
High	2462	14.73	30	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.



Average Power Data

IEEE 802.11b mode



Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	8.86
Middle	2437	8.79
High	2462	9.46


IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	6.67
Middle	2437	8.45
High	2462	7.04





MAXIMUM PEAK OUTPUT POWER (802.11b MODE)

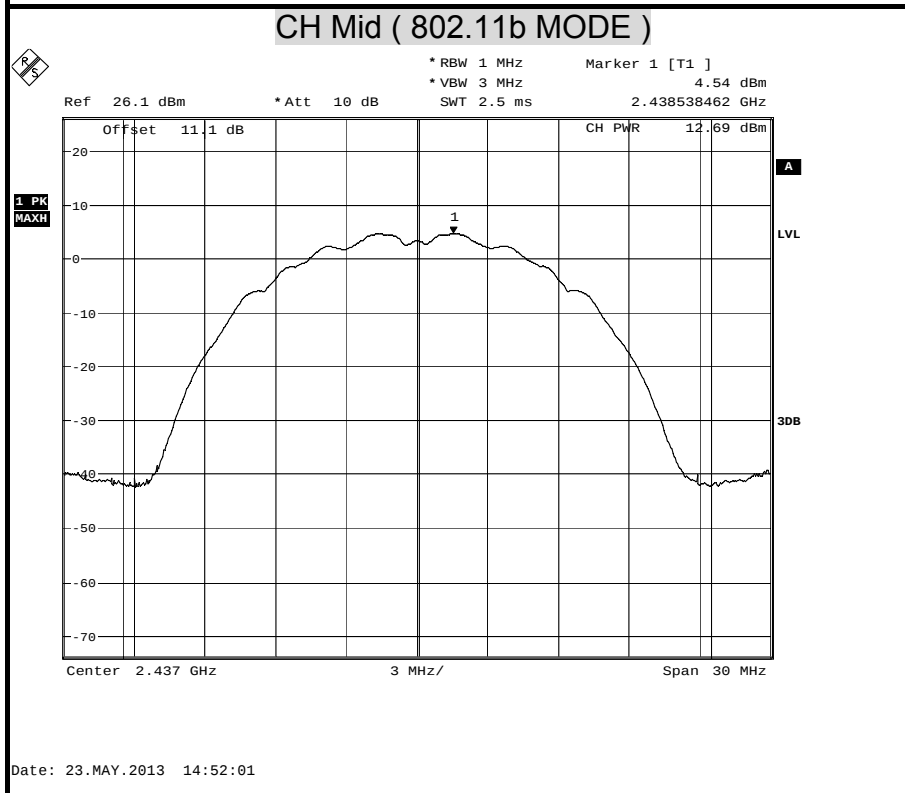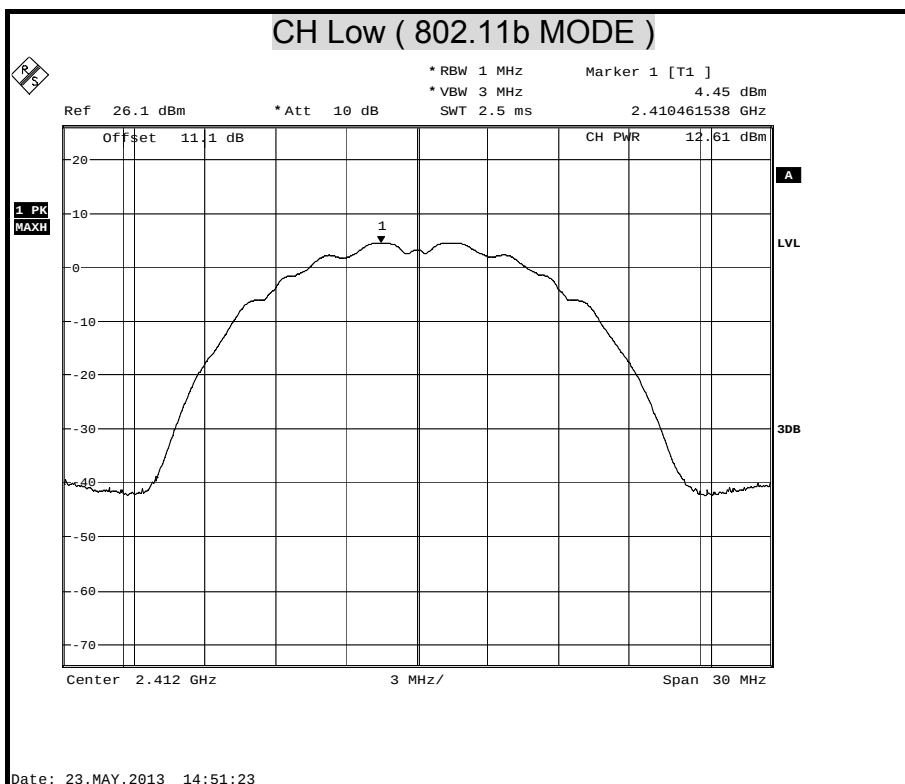


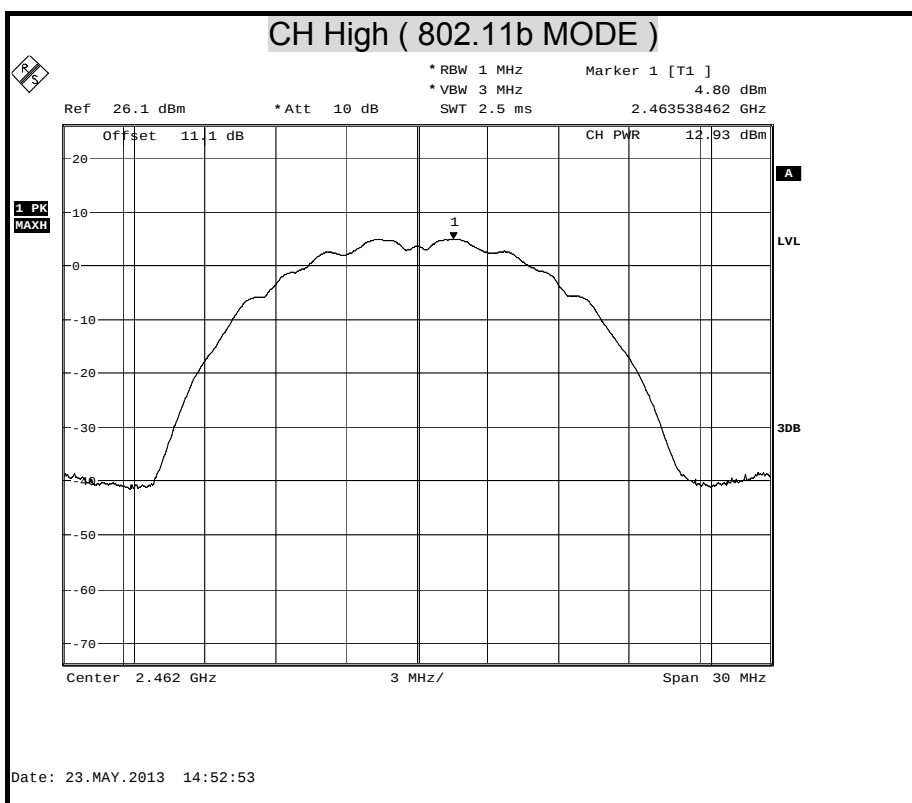





MAXIMUM PEAK OUTPUT POWER (802.11g MODE)

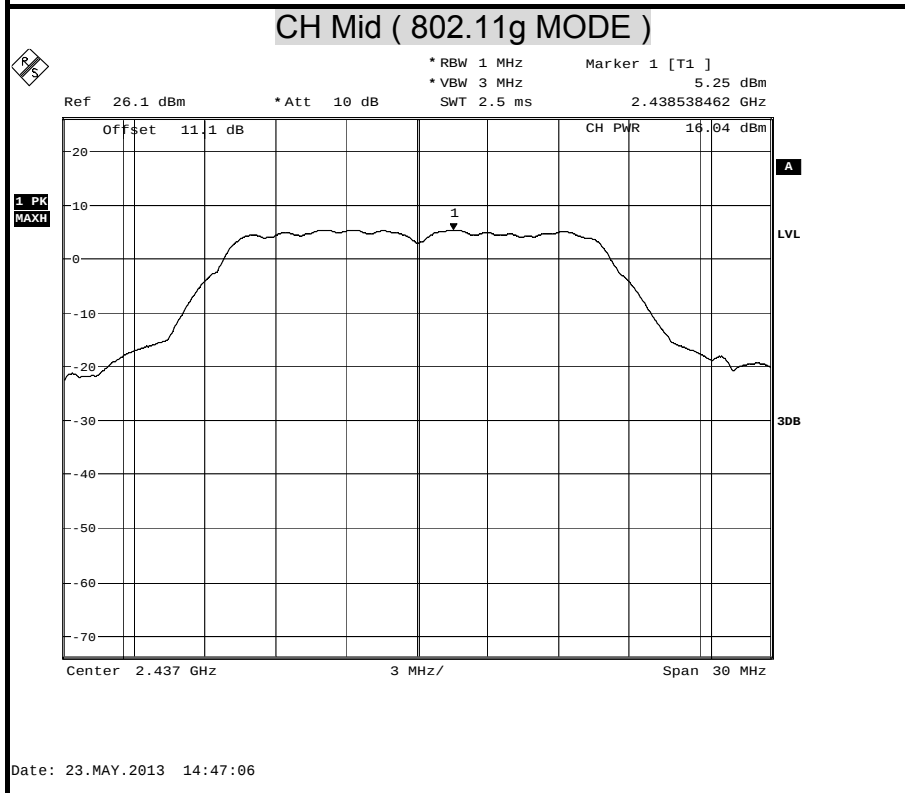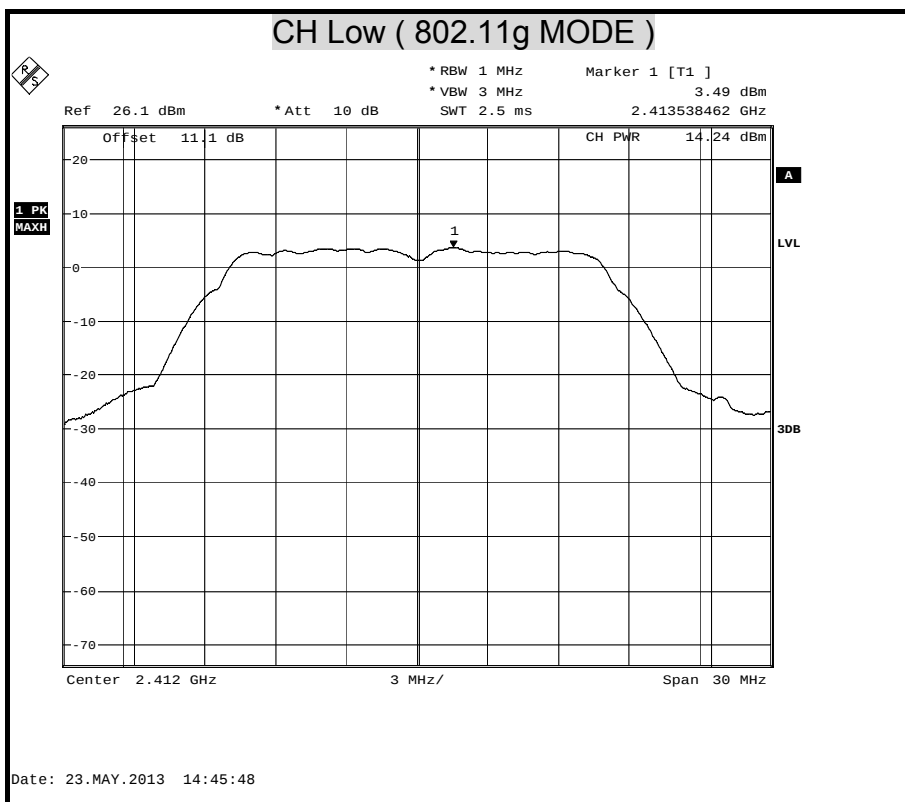


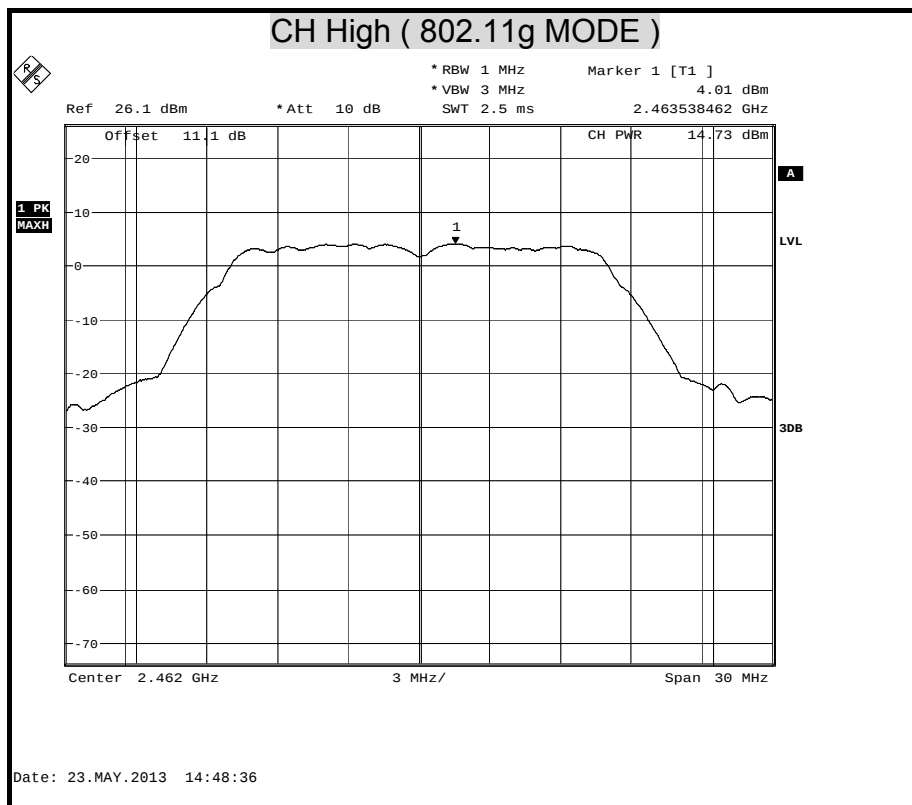





Average Power (802.11b MODE)

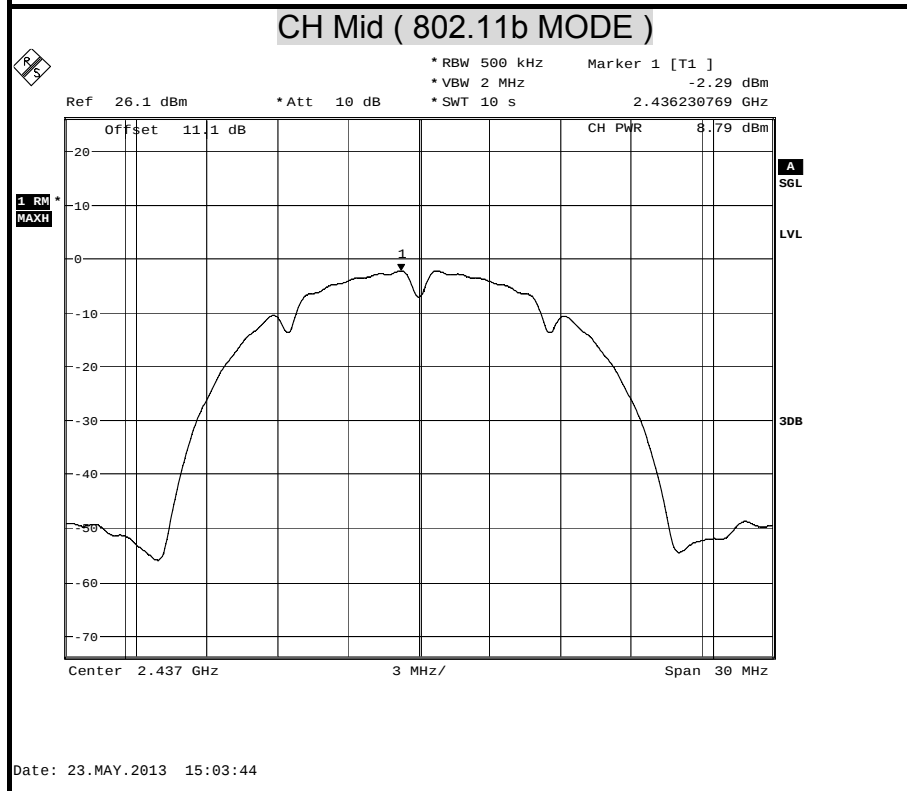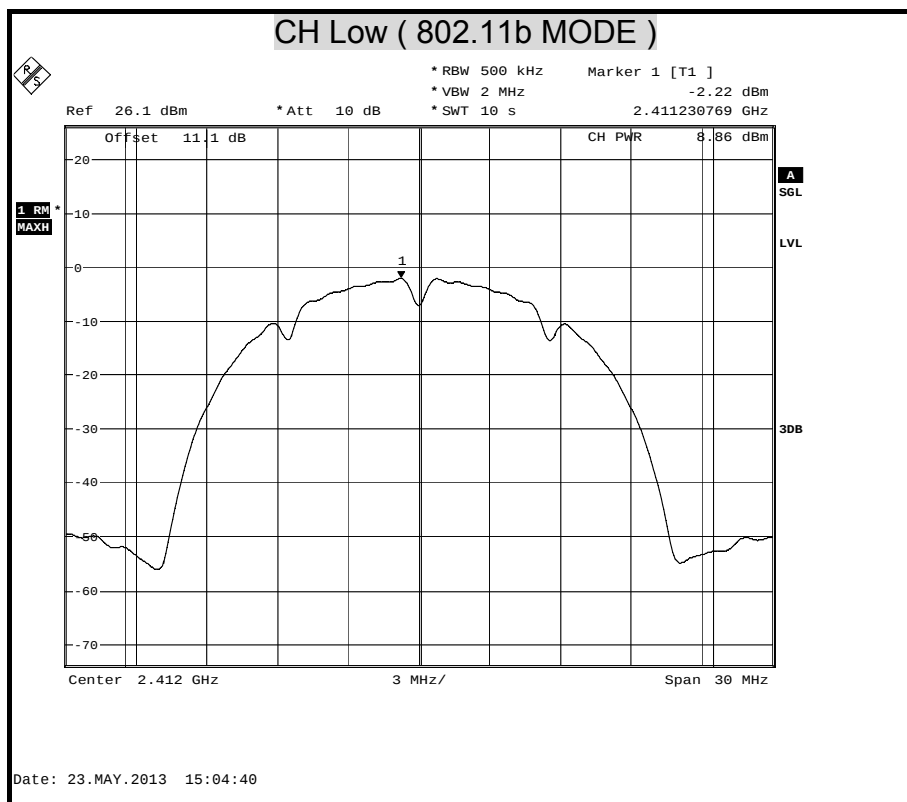


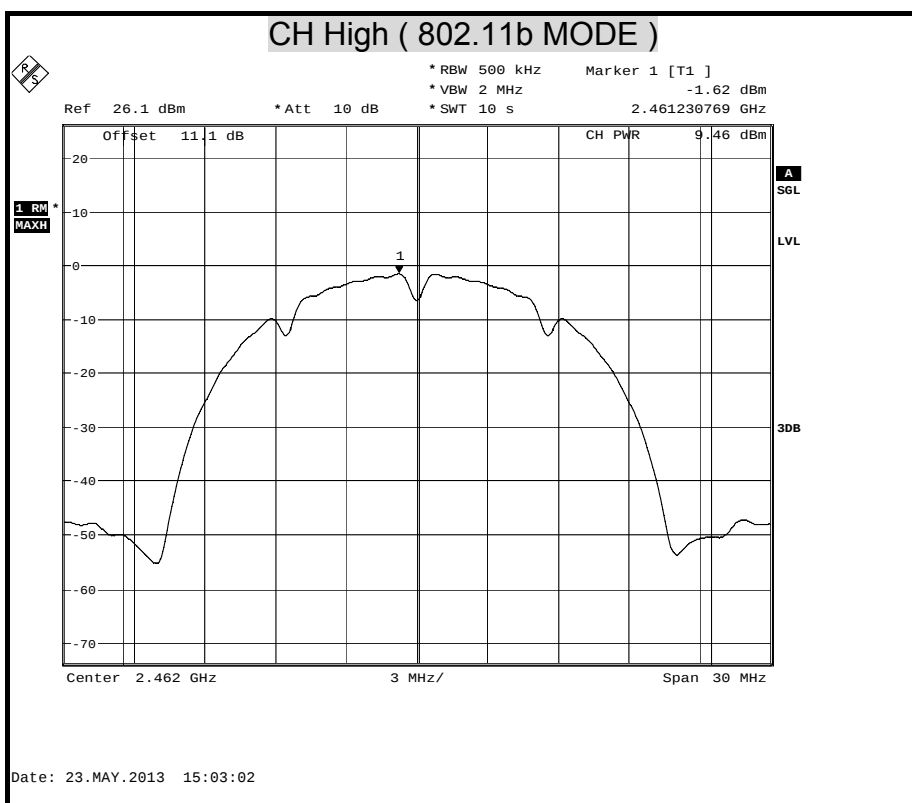



Average Power (802.11g MODE)

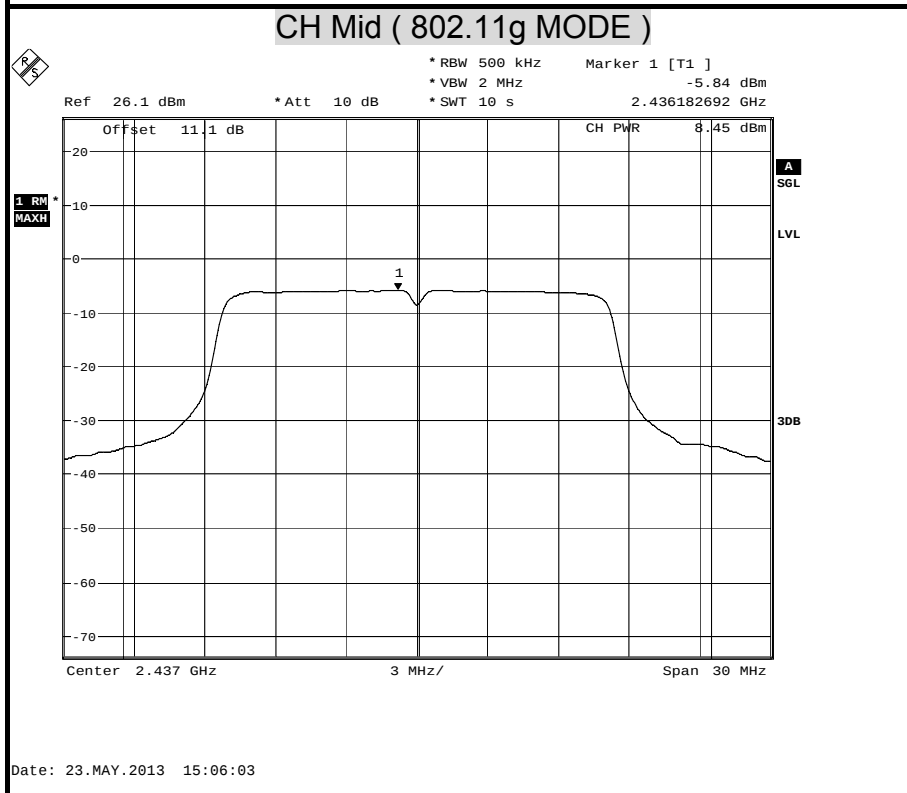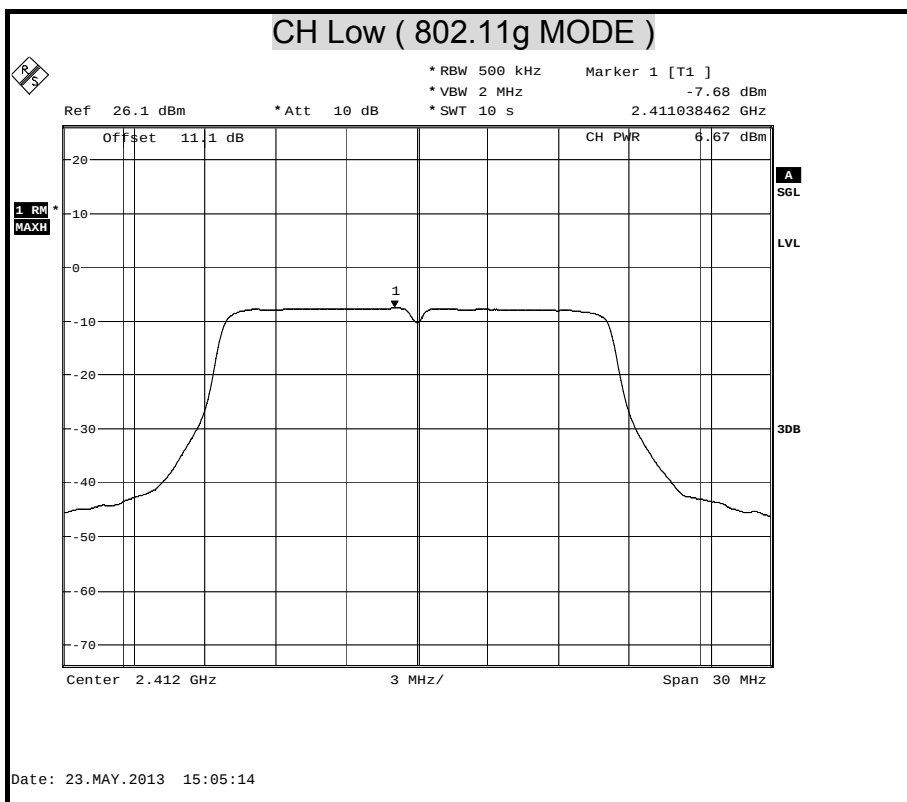

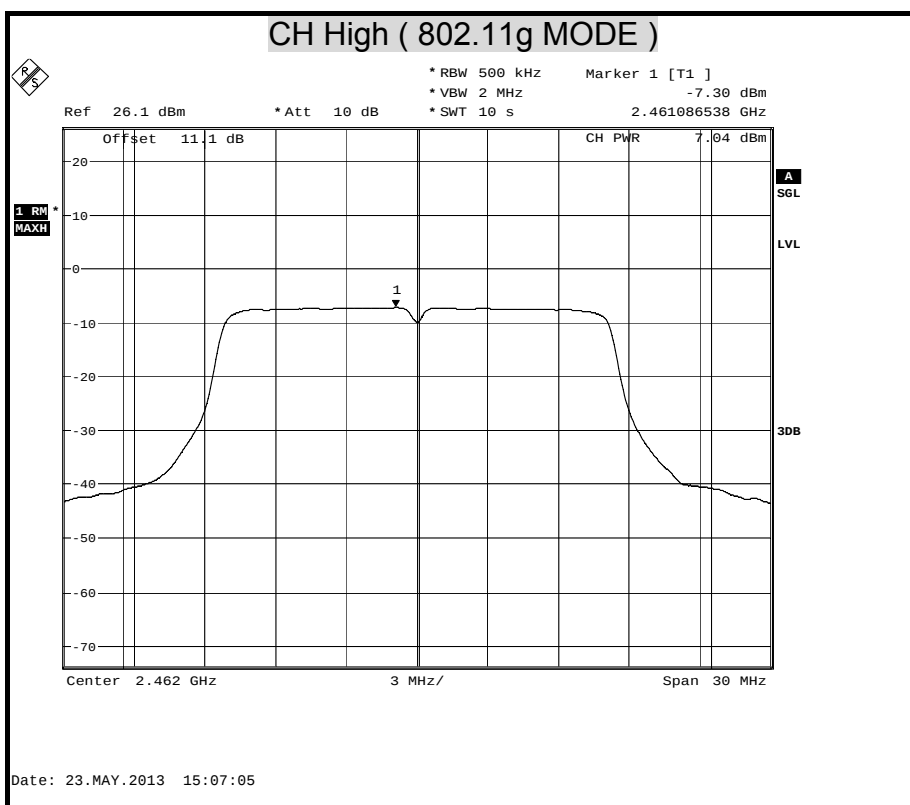



8.3 MAXIMUM PERMISSIBLE EXPOSURE

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b) LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational / Control Exposures				
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300-1,500	--	--	F/1500	6
1,500-100,000	--	--	1	30

CALCULATIONS

Given $E = \frac{\sqrt{30 \times P \times G}}{d}$ & $S = \frac{E^2}{3770}$

Where E = Field strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770d^2}$$

Changing to units of mW and cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = d \text{ (m)} / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$

Where d = Distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²



LIMIT

Power Density Limit, $S=1.0\text{mW/cm}^2$

TEST RESULTS

No non-compliance noted.

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$

$G=0 \text{ dBi}=1\text{mW}$

IEEE 802.11b	=	0.0796 *	19.6336	*	1.00000000	÷ 400 =	0.003907
IEEE 802.11g	=	0.0796 *	40.1791	*	1.00000000	÷ 400 =	0.007996

Mode	Minimum separation distance (cm)	Output Power (dBm)	Output Power (mw)	Antenna Gain (dBi)	Power Density Limit (mW/cm ²)	Power Density at 20cm (mW/cm ²)
IEEE 802.11b	20	12.93	19.63	0.00	1.00	0.003907
IEEE 802.11g	20	16.04	40.18	0.00	1.00	0.007996

REMARK: For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.



8.4 POWER SPECTRAL DENSITY


LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200789	JUL. 01, 2013

TEST SETUP



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 10.2.

Method PKPSD (peak PSD)

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

No non-compliance noted.



IEEE 802.11b mode

Channel	Frequency (MHz)	Reading (dBm)	Limit (dBm)	Margin (dB)	Result
Low	2412	-1.42	8.00	-9.42	PASS
Middle	2437	-1.33	8.00	-9.33	PASS
High	2462	-1.04	8.00	-9.04	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



IEEE 802.11g mode


Channel	Frequency (MHz)	Reading (dBm)	Limit (dBm)	Margin (dB)	Result
Low	2412	-7	8.00	-15.00	PASS
Middle	2437	-5.18	8.00	-13.18	PASS
High	2462	-6.75	8.00	-14.75	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps..
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.





POWER SPECTRAL DENSITY (IEEE 802.11b MODE)

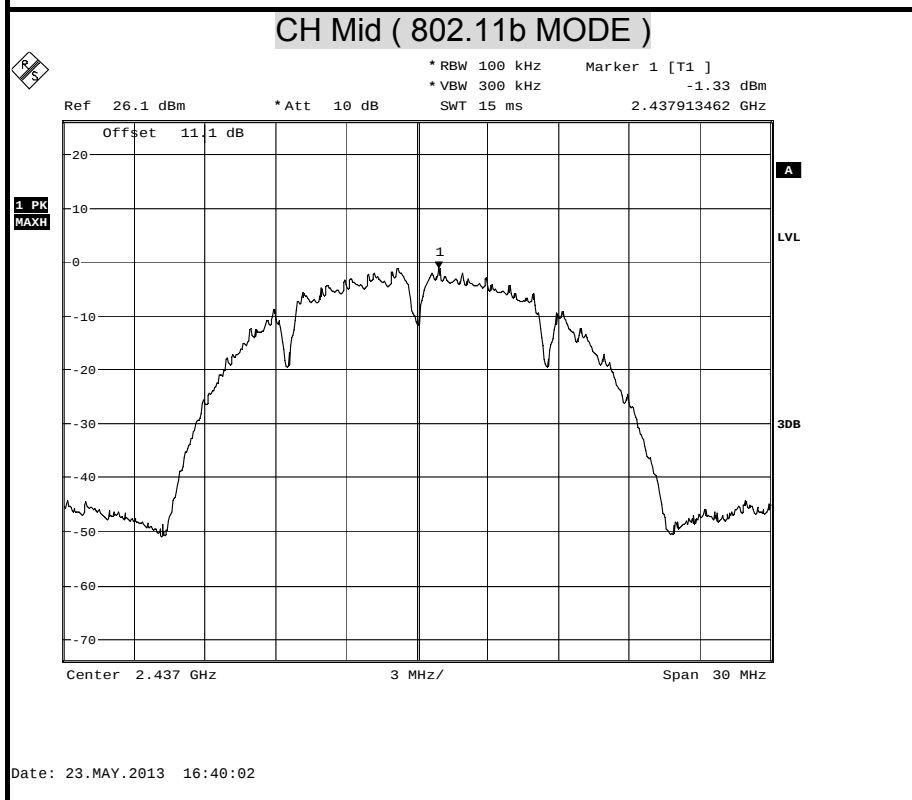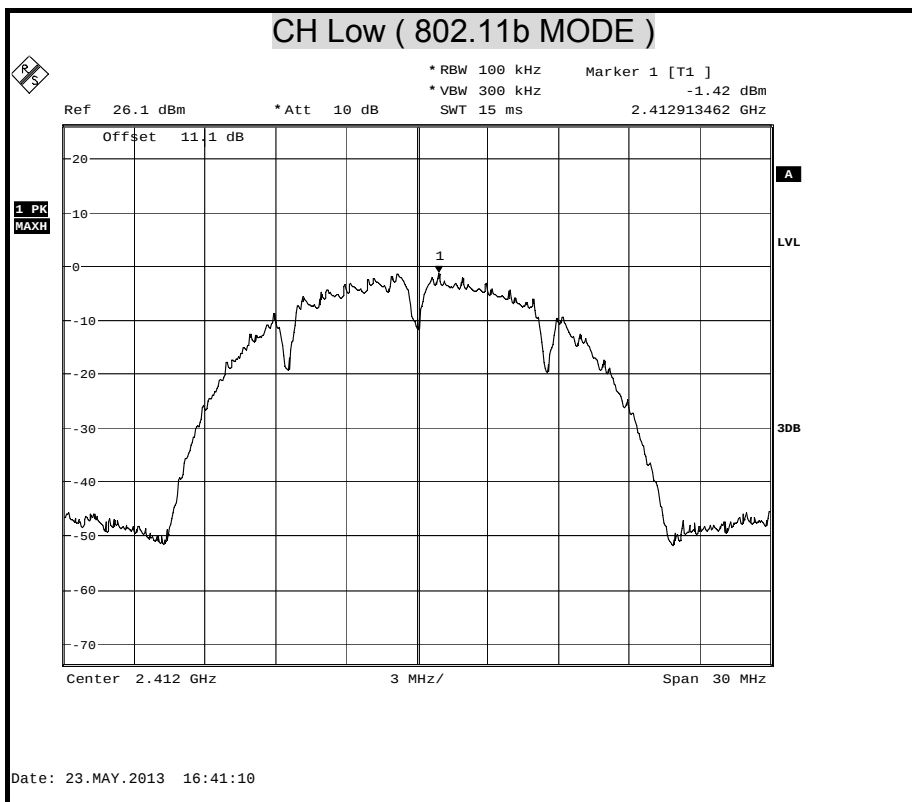


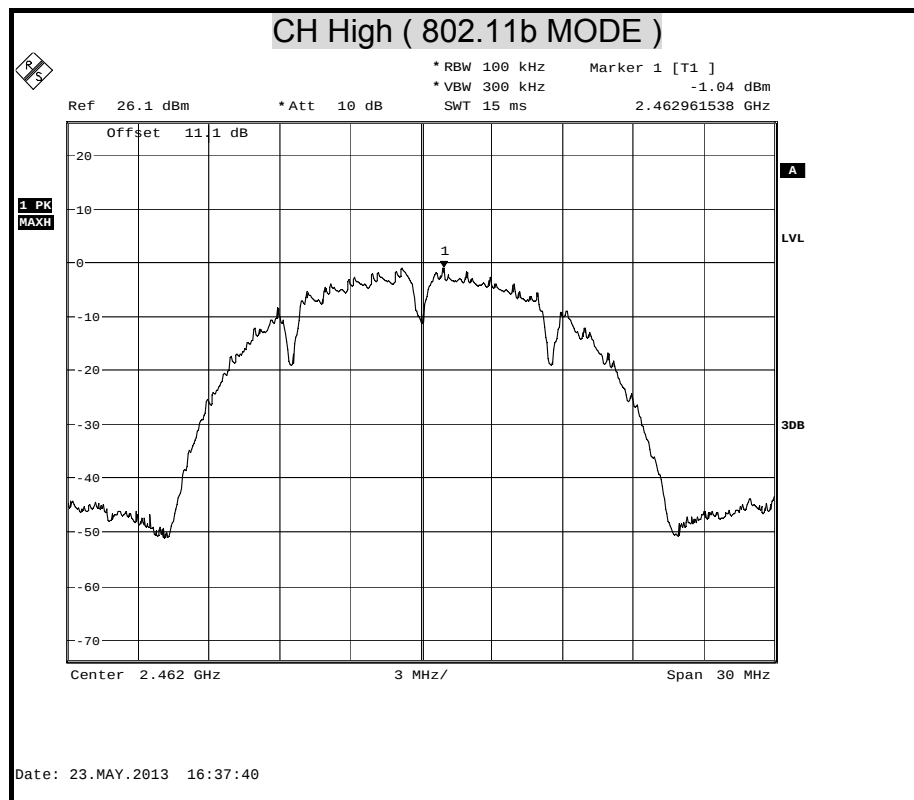



POWER SPECTRAL DENSITY (IEEE 802.11g MODE)

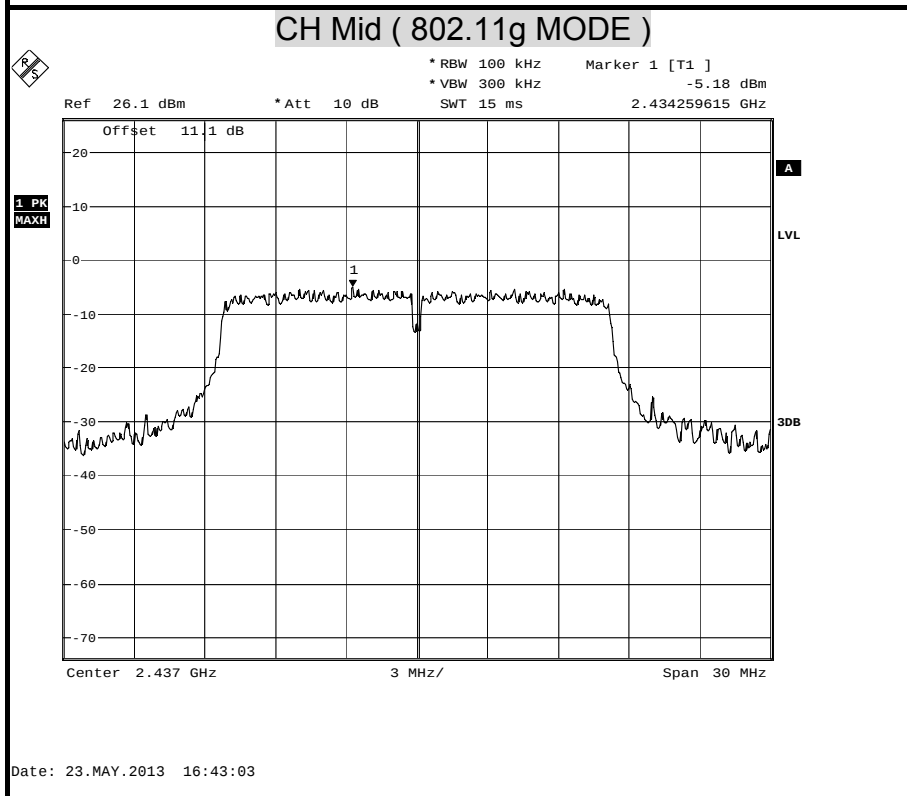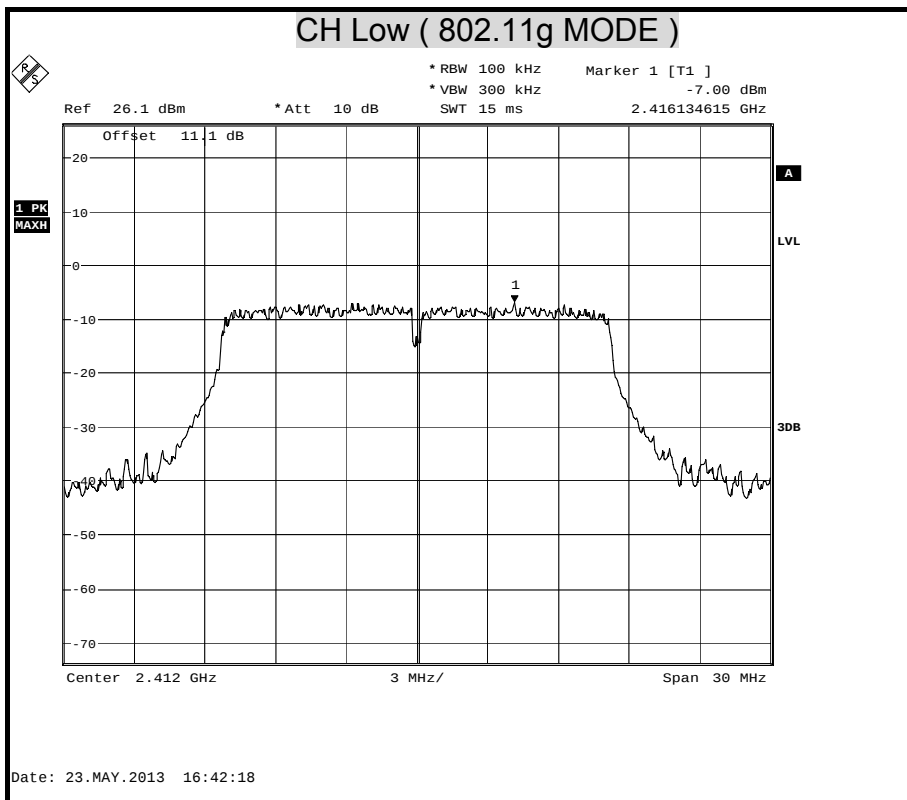

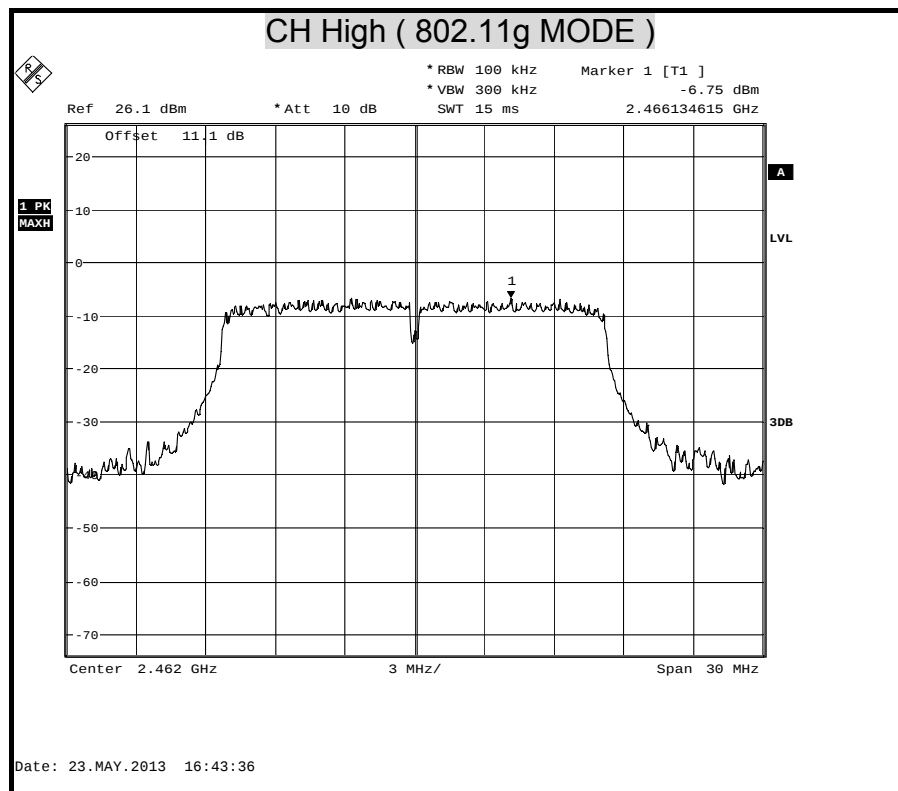



8.5 DUTY CYCLE

LIMIT

Nil (No dedicated limit specified in the Rules)

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200789	JUL. 01, 2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST RESULTS

No non-compliance noted.

TEST DATA



	us	Times	Ton	Total Ton time(ms)
Ton1	100000.000	1	100000.000	100.000
Ton2		0	0.000	
Ton3		0	0.000	
Tp				100.000

Ton	100.000
Tp(Ton+Toff)	100.000
Duty Cycle	1.000
Duty Factor	0.000

100 %



TEST PLOT

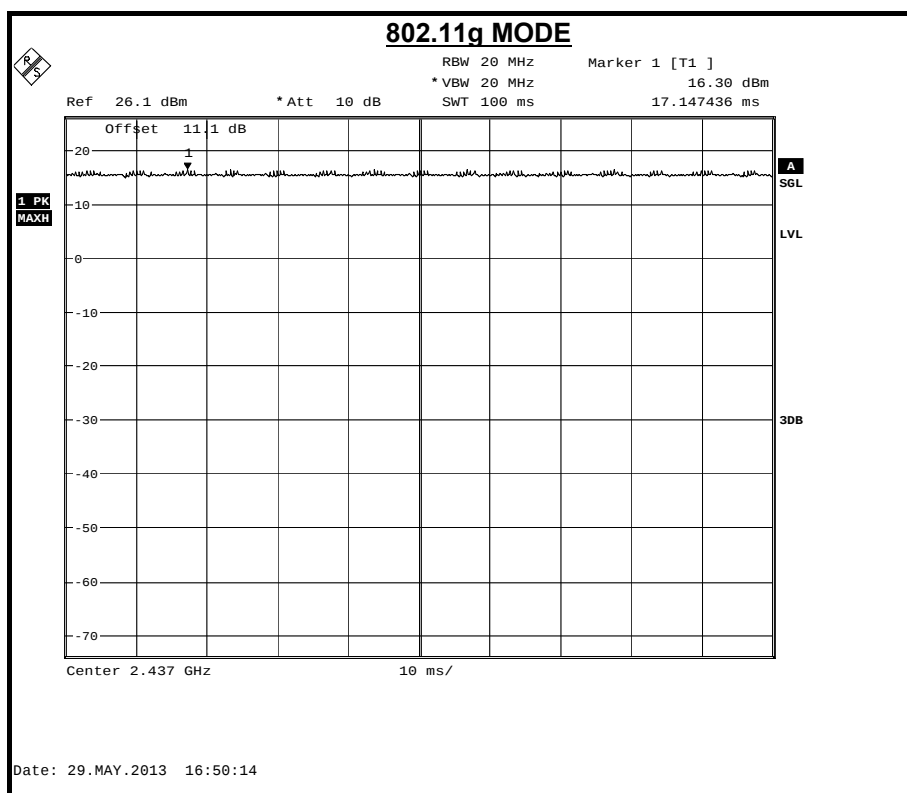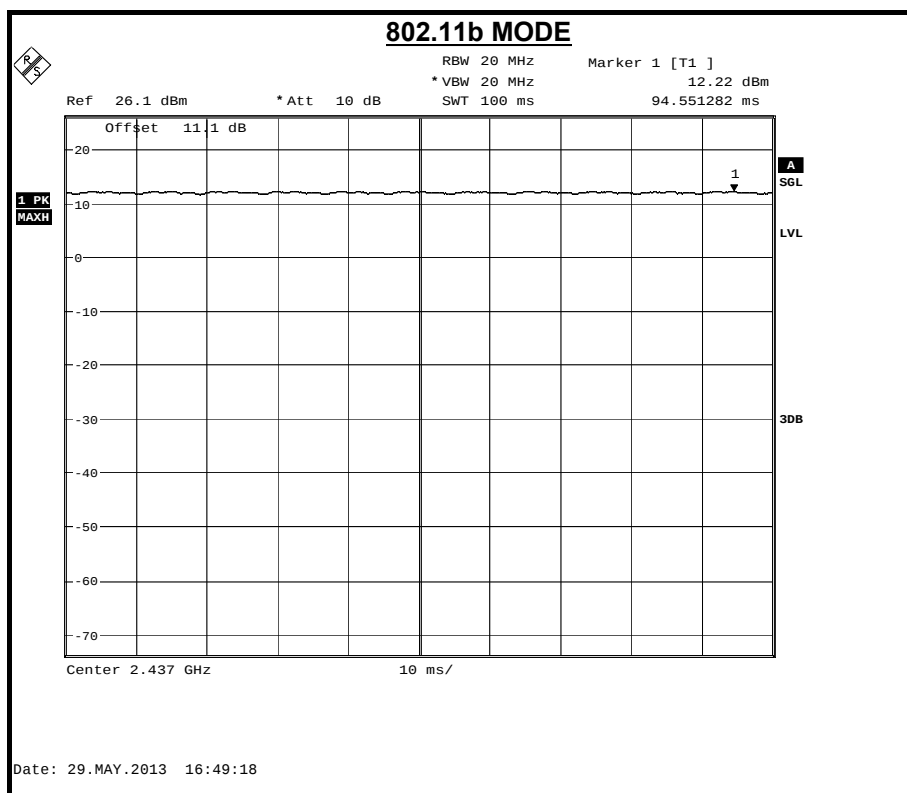



8.6 CONDUCTED SPURIOUS EMISSION

LIMITS


§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200789	JUL. 01, 2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

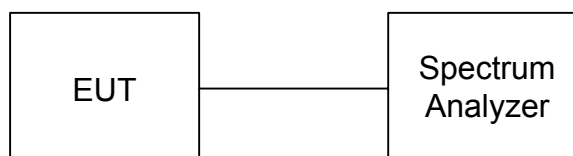

TEST PROCEDURE

The tests were performed in accordance with KDB 558074 11.2 & 11.3 .

11.2 Reference level measurement

Establish a reference level by using the following procedure:

- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the *DTS bandwidth*.
- Set the RBW = 100 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.



11.3 Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Ensure that the number of measurement points $\geq$ span/RBW
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.



TEST RESULTS


No non-compliance noted.





TEST DATA


REFERENCE LEVEL (IEEE 802.11b MODE)

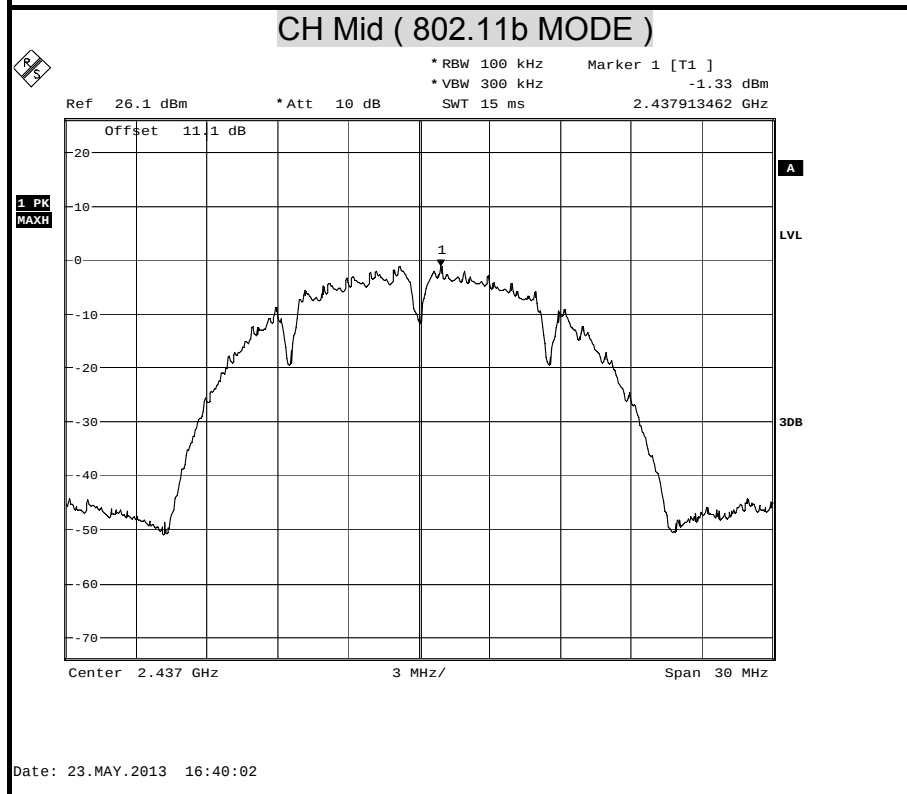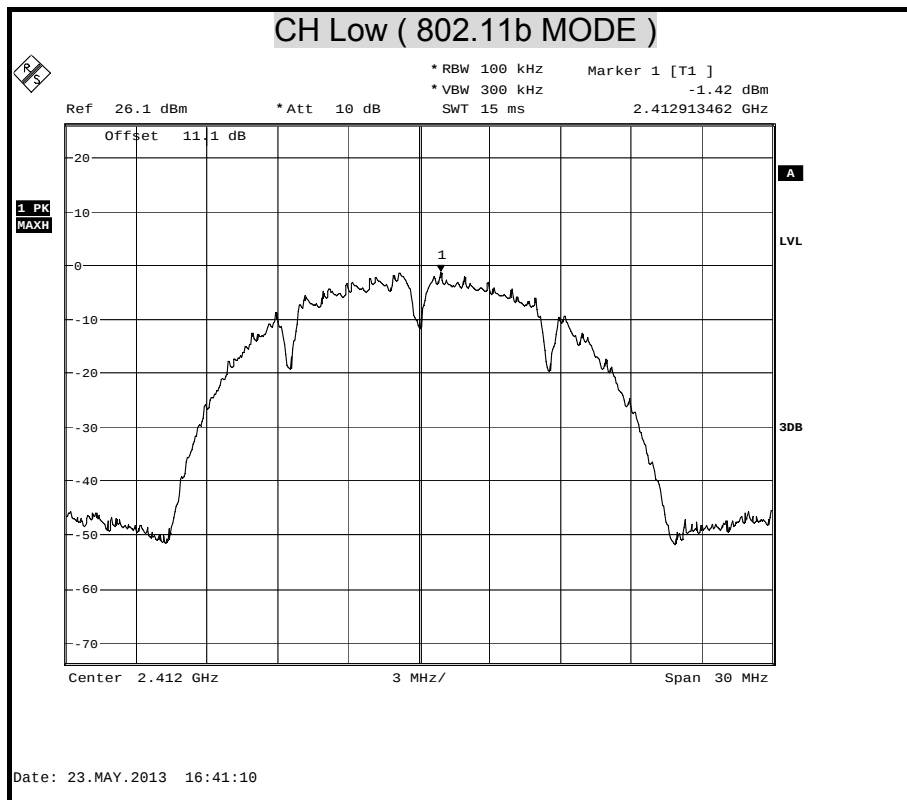

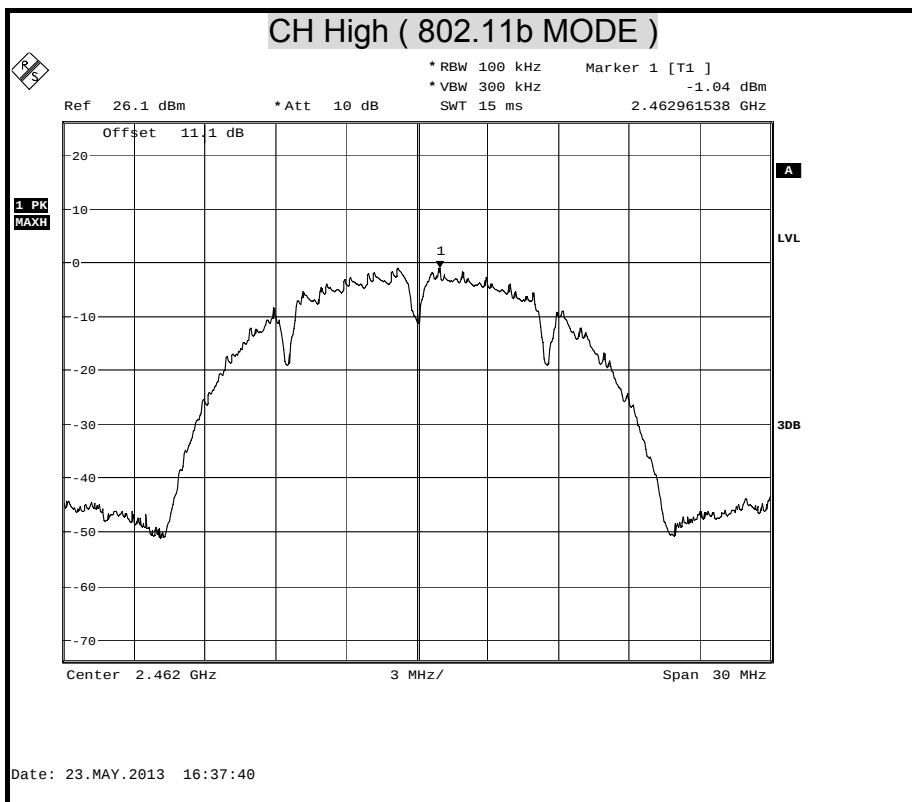

REFERENCE LEVEL (IEEE 802.11g MODE)

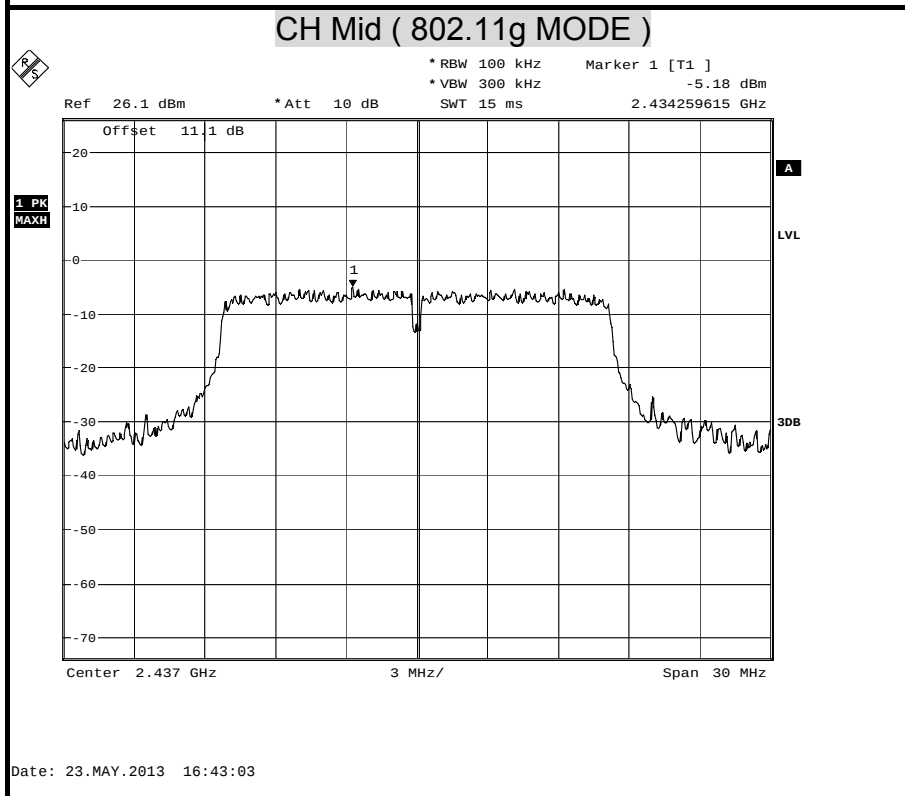
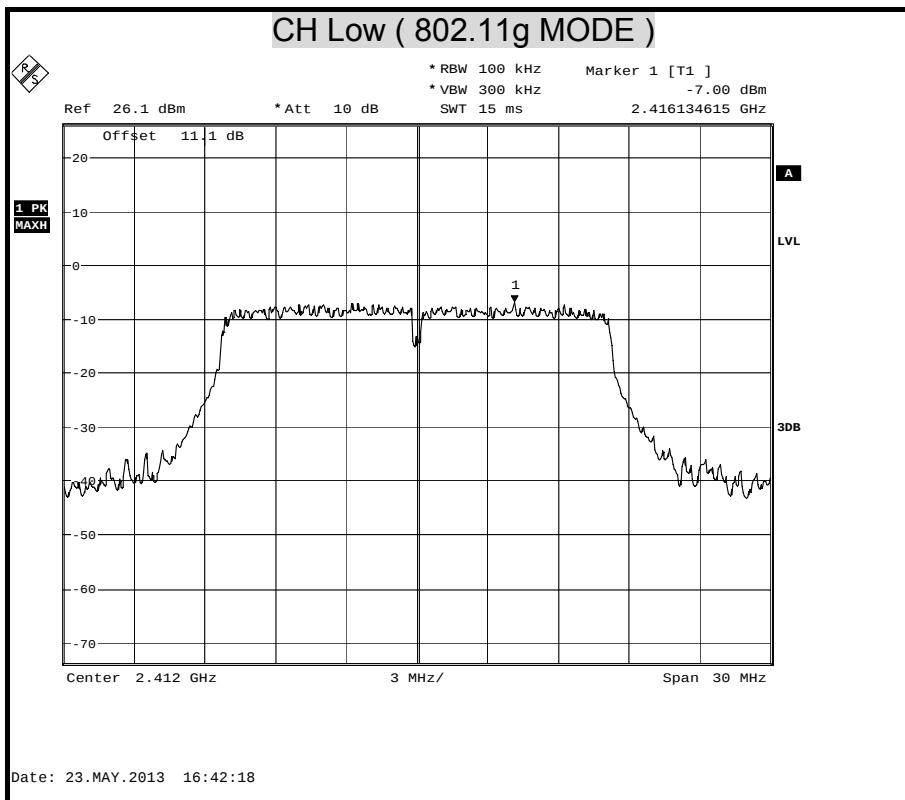



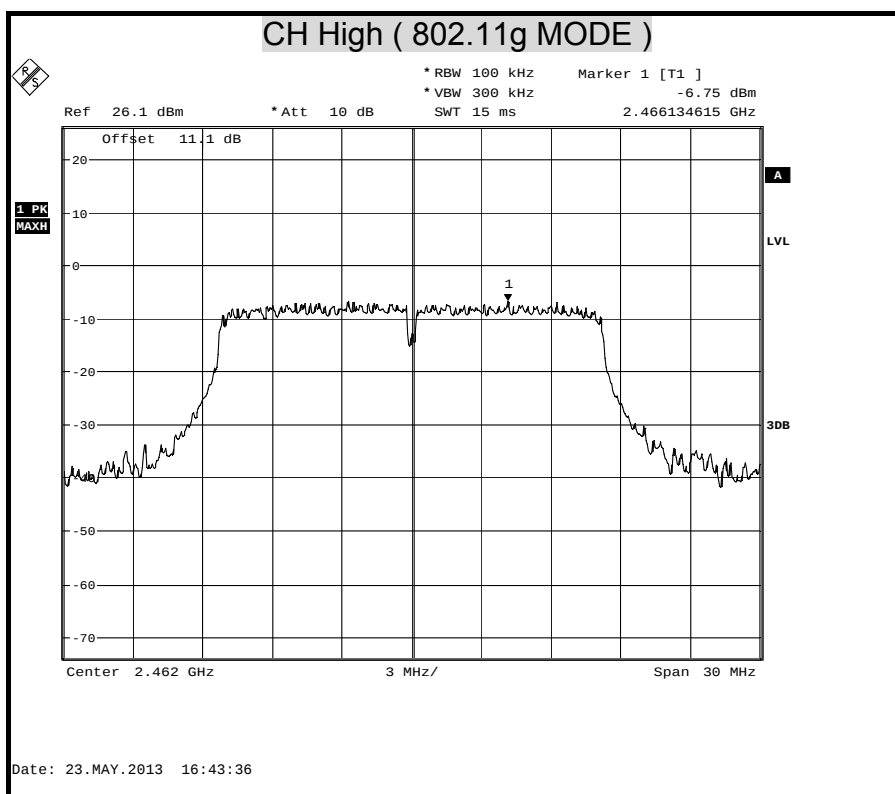






OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

(IEEE 802.11b MODE)

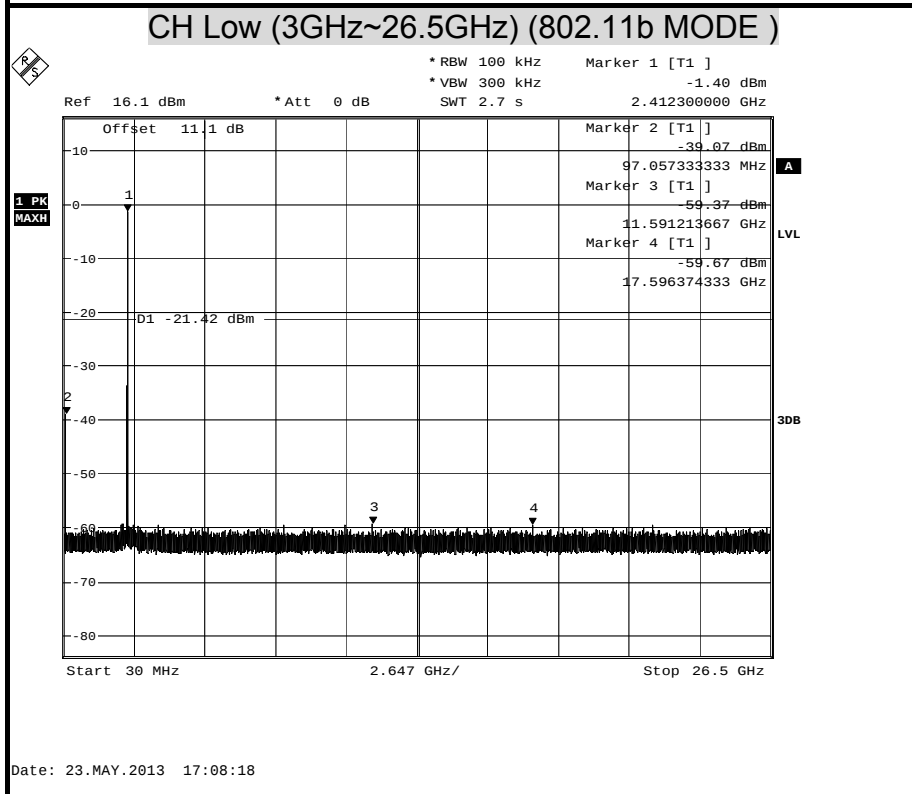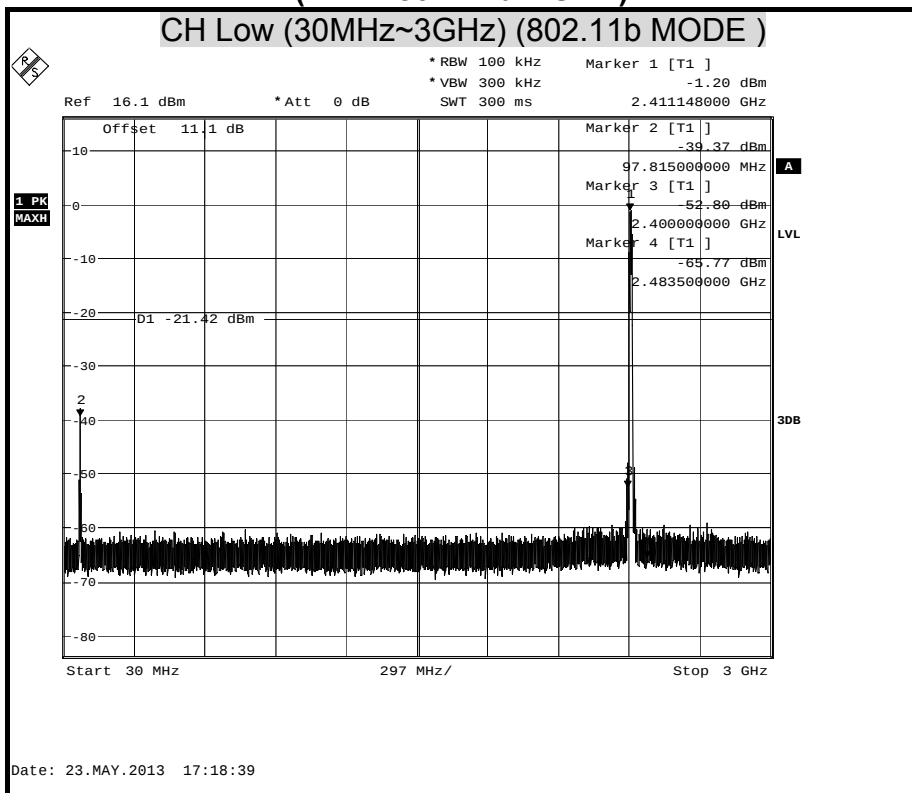

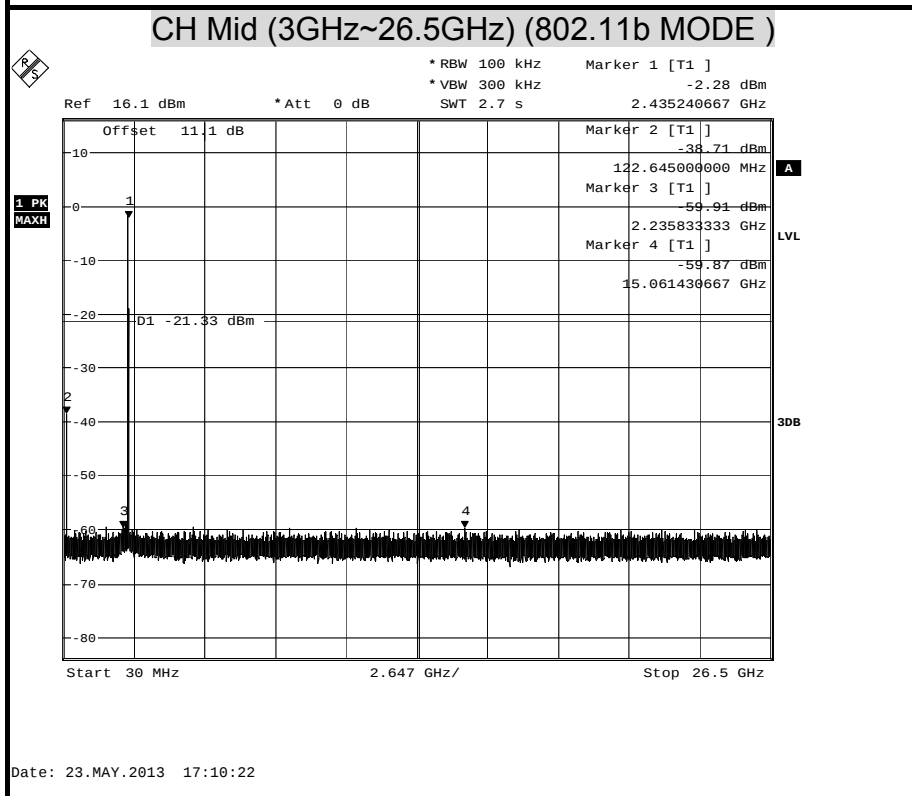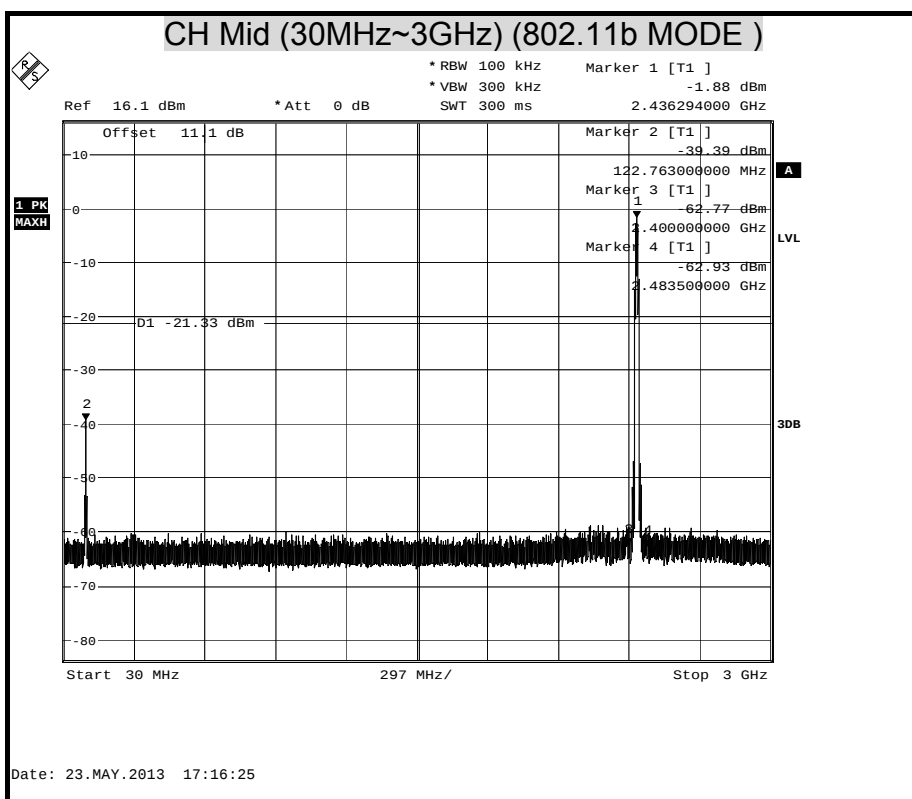


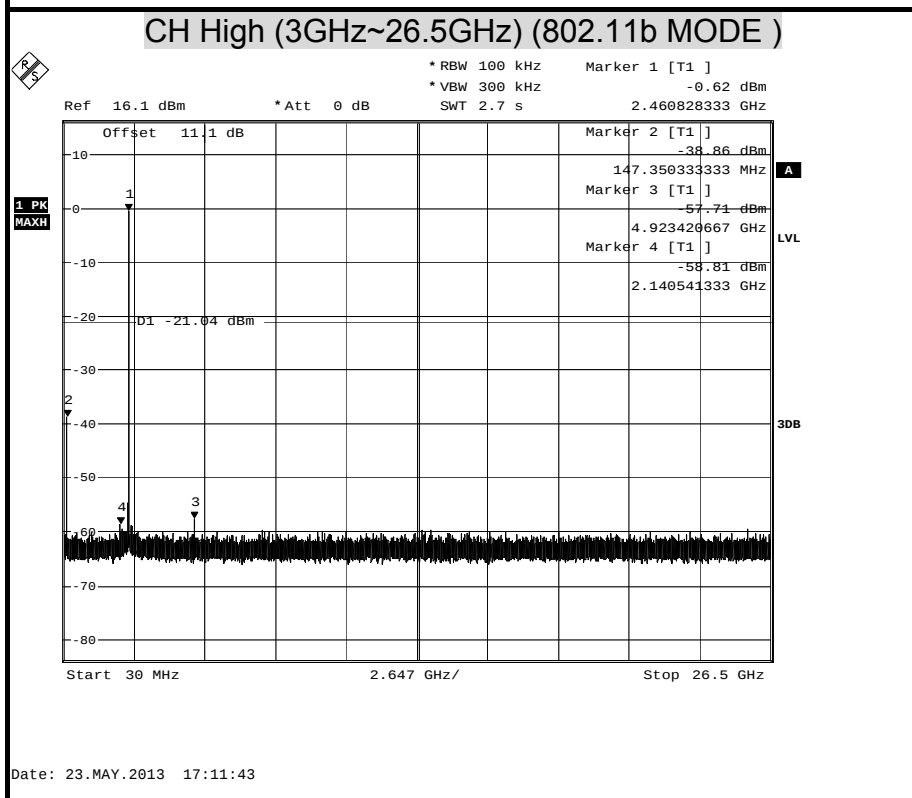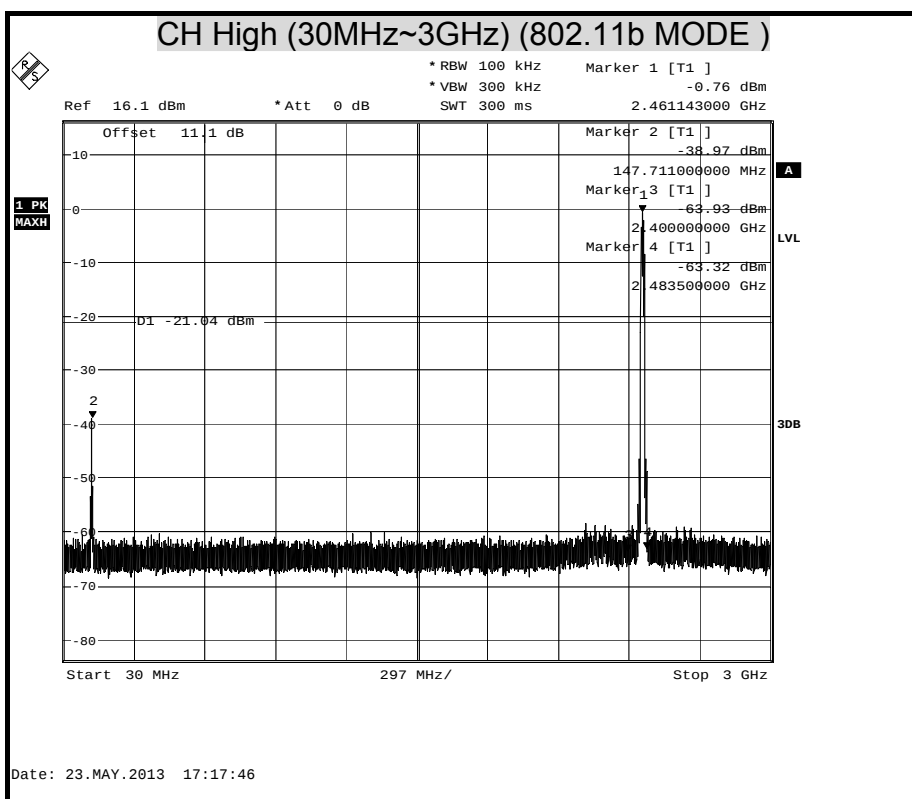




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


(IEEE 802.11g MODE)

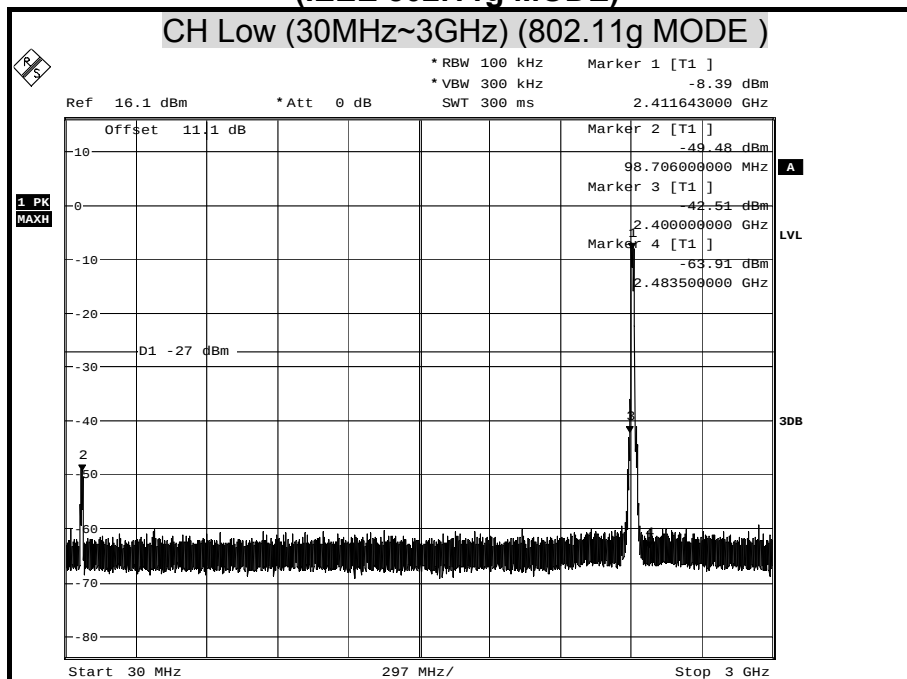


Date: 23.MAY.2013 17:19:38

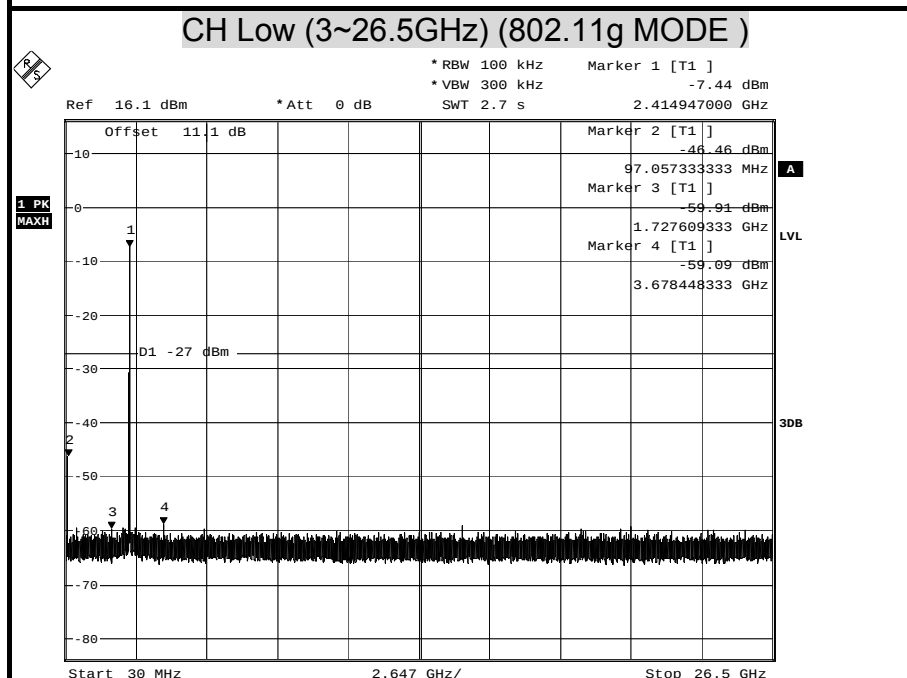

Date: 23.MAY.2013 17:05:42

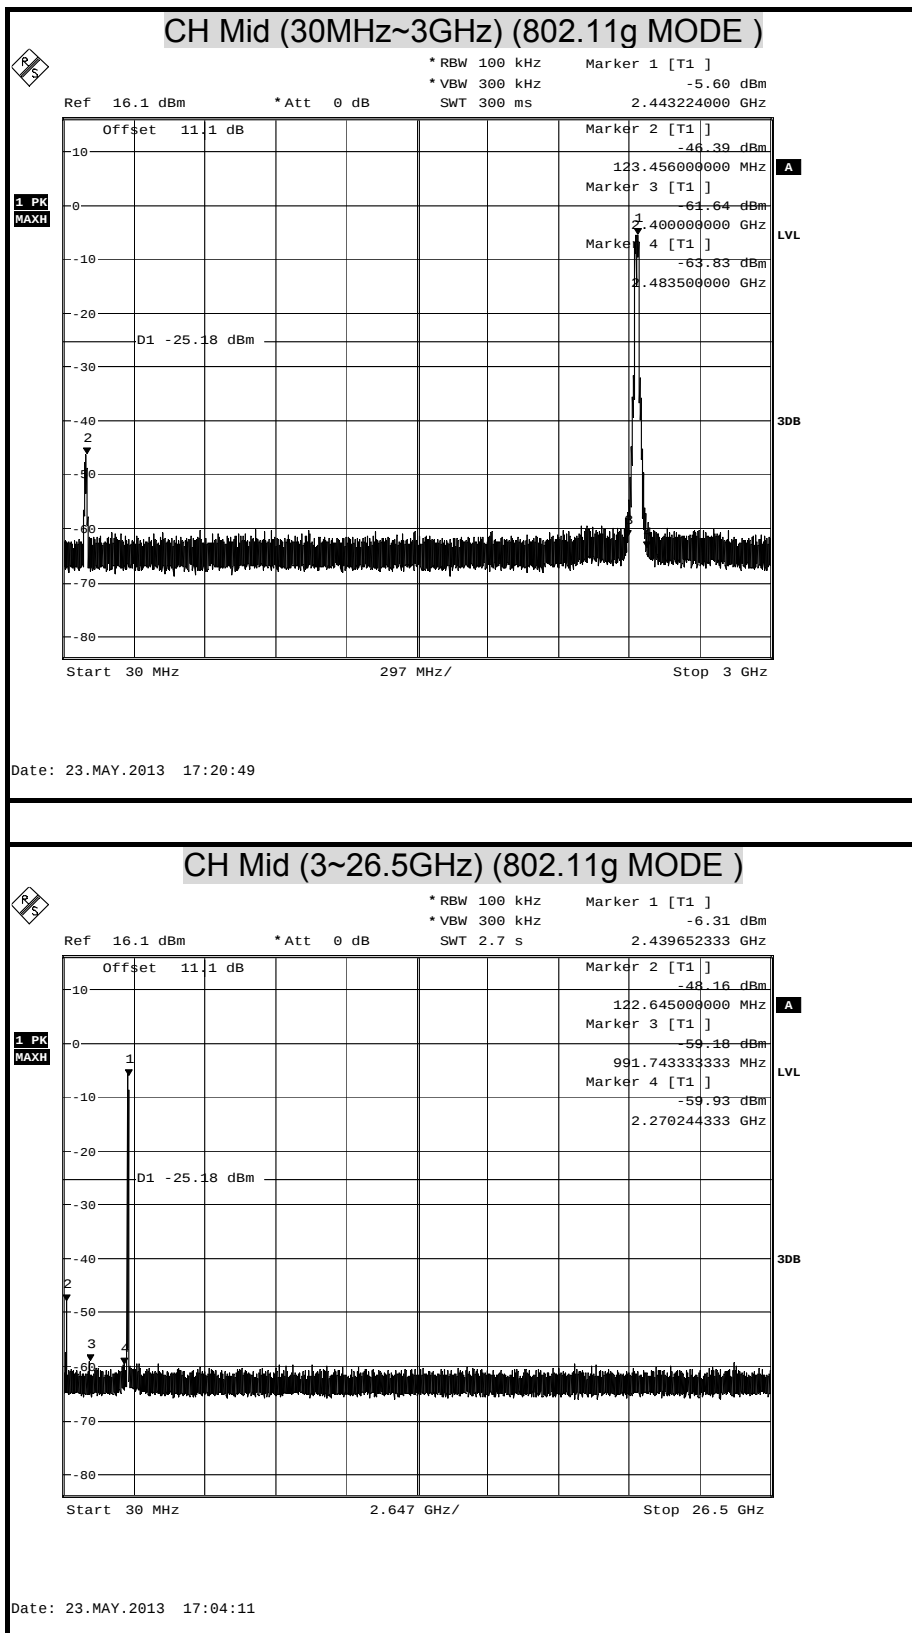

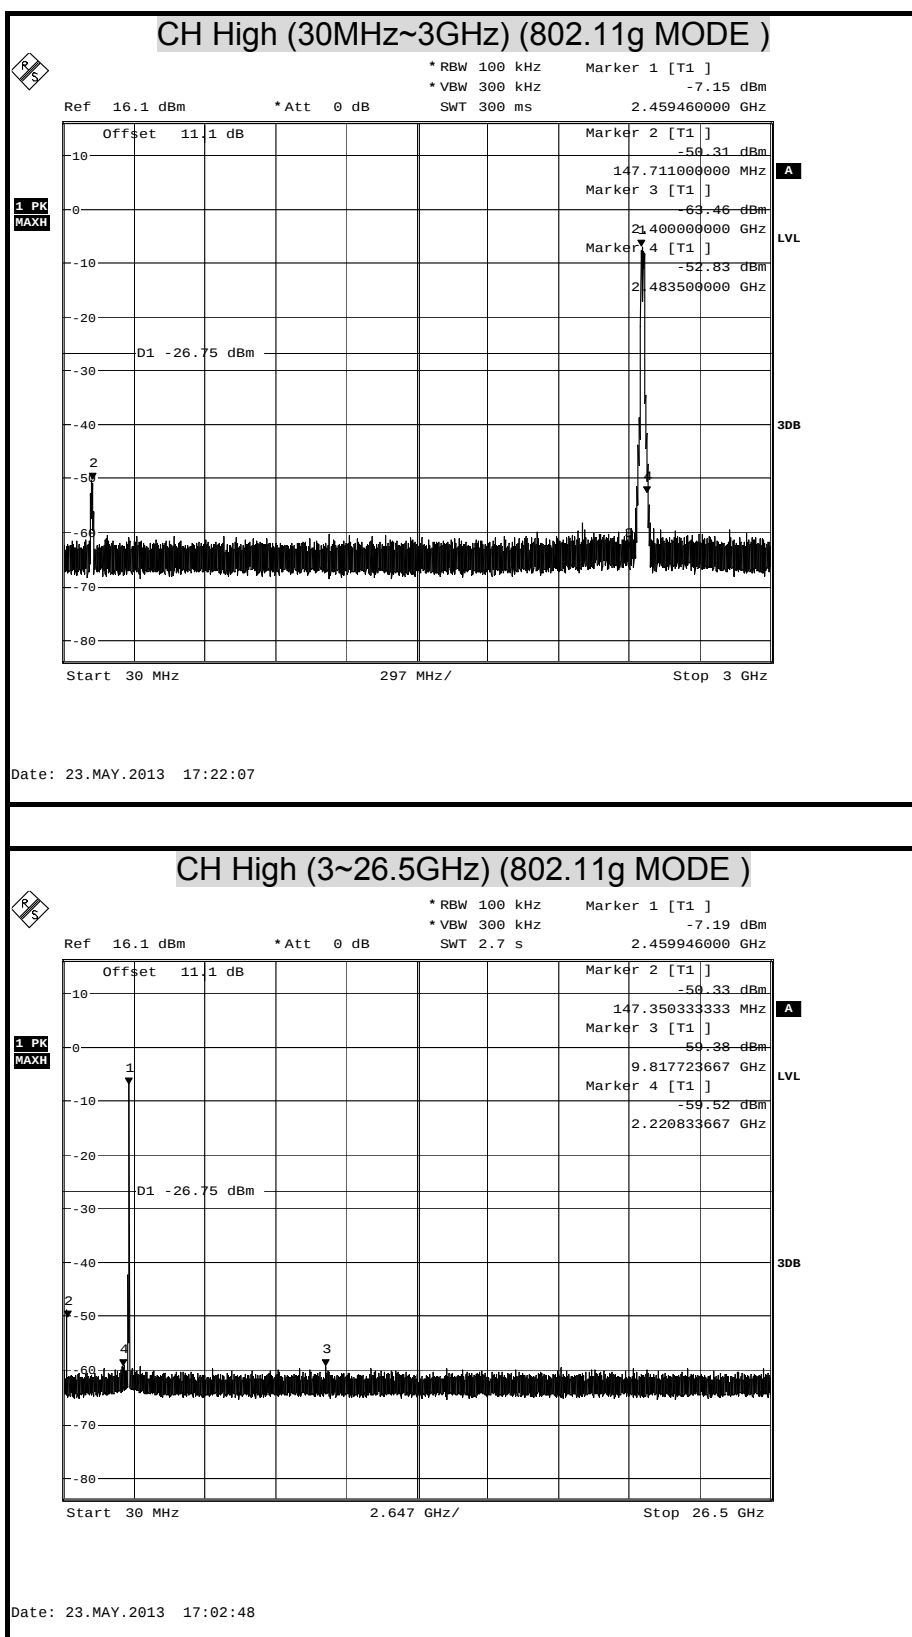



8.7 RADIATED EMISSIONS

8.7.1 TRANSMITTER RADIATED SUPURIOUS EMISSIONS

LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST EQUIPMENTS


The following test equipments are utilized in making the measurements contained in this report.

Open Area Test Site # 6				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TYPE N COAXIAL CABLE	SUHNER	CHA9513	6	DEC. 18, 2013
BI-LOG Antenna	Sunol	JB1	A070506-2	SEP. 26, 2013
LOOP ANTENNA	EMCO	6502	8905-2356	JUN. 10, 2013
Pre-Amplifier	HP	8447F	NCR	NCR
EMI Receiver	R&S	ESVS10	833206/012	JUN. 26, 2013
Horn Antenna	Com-Power	AH-118	071032	DEC. 05, 2013
3116 Double Ridge Antenna (40G)	ETS-LINDGREN	3116	00078900	DEC. 27, 2013
Turn Table	Yo Chen	001	-----	N.C.R.
Antenna Tower	AR	TP1000A	309874	N.C.R.
Controller	CT	SC101	-----	N.C.R.
RF Swicth	E-INSTRUMENT TELH LTD	ERS-180A	EC1204141	N.C.R
Power Meter	Anritsu	ML2487A	6K00003888	MAY. 20, 2014
Power Sensor	Anritsu	MA2491A	33265	MAY. 20, 2014
Temp./Humidity Chamber	K.SON	THS-M1	242	AUG. 08, 2013
DC Power Source	LOKO	DSP-5050	L1507009282	N.C.R
Spectrum Analyzer	R&S	FSU	200789	JUL. 01, 2013
Spectrum Analyzer	R&S	FSEM 30	835253/002	SEP. 28, 2013




TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

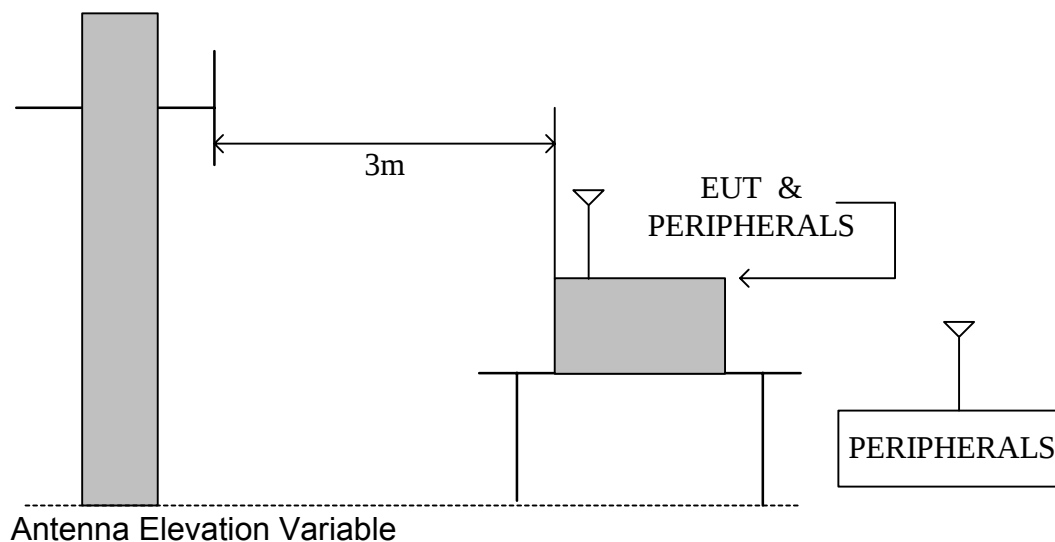

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

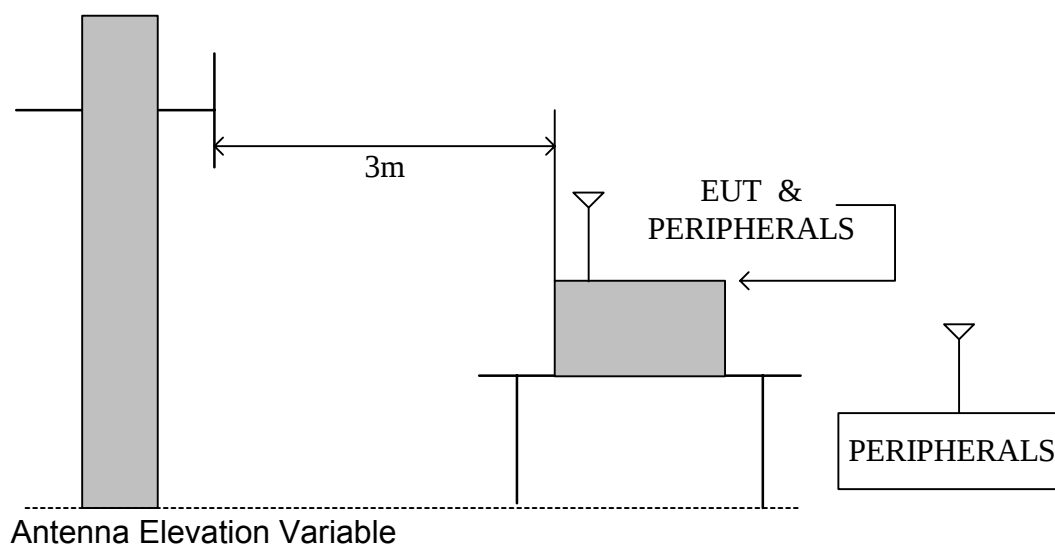



TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The tests were performed in accordance with KDB 558074 5.4.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. **No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)**

TEST RESULTS

No non-compliance noted.




8.7.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

Product Name	DJ SYSTEM	Test Date	2013/04/19
Model	XDJ-R1	Test By	Ted Huang
Test Mode	Link XDJ-R1 to PC, CD : ON, USB DISK : ON, WLAN : ON, AUX IN : ON, MIC : ON, Line/Phono SW : Line , AUX GAIN : 12dB	TEMP& Humidity	27 , 58%

Horizontal

(The chart below shows the highest readings taken from the final data.)

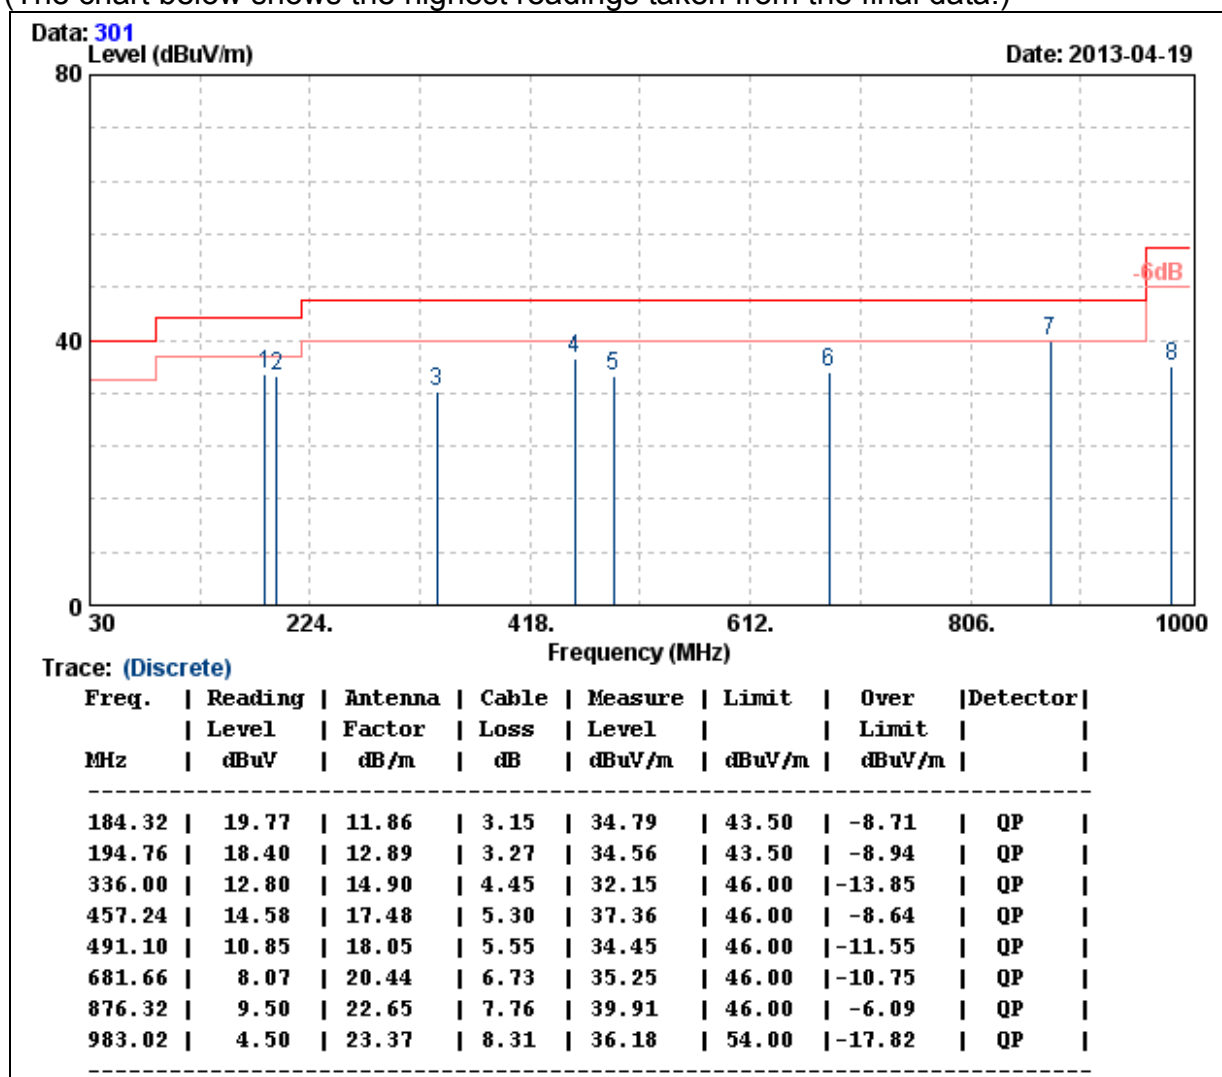


- Note: 1. QP= Quasi-peak Reading.
2. The other emission levels were very low against the limit



Product Name	DJ SYSTEM	Test Date	2013/04/19
Model	XDJ-R1	Test By	Ted Huang
Test Mode	Link XDJ-R1 to PC, CD : ON, USB DISK : ON, WLAN : ON, AUX IN : ON, MIC : ON, Line/Phono SW : Line , AUX GAIN : 12dB	TEMP& Humidity	27 , 58%

Vertical

(The chart below shows the highest readings taken from the final data.)

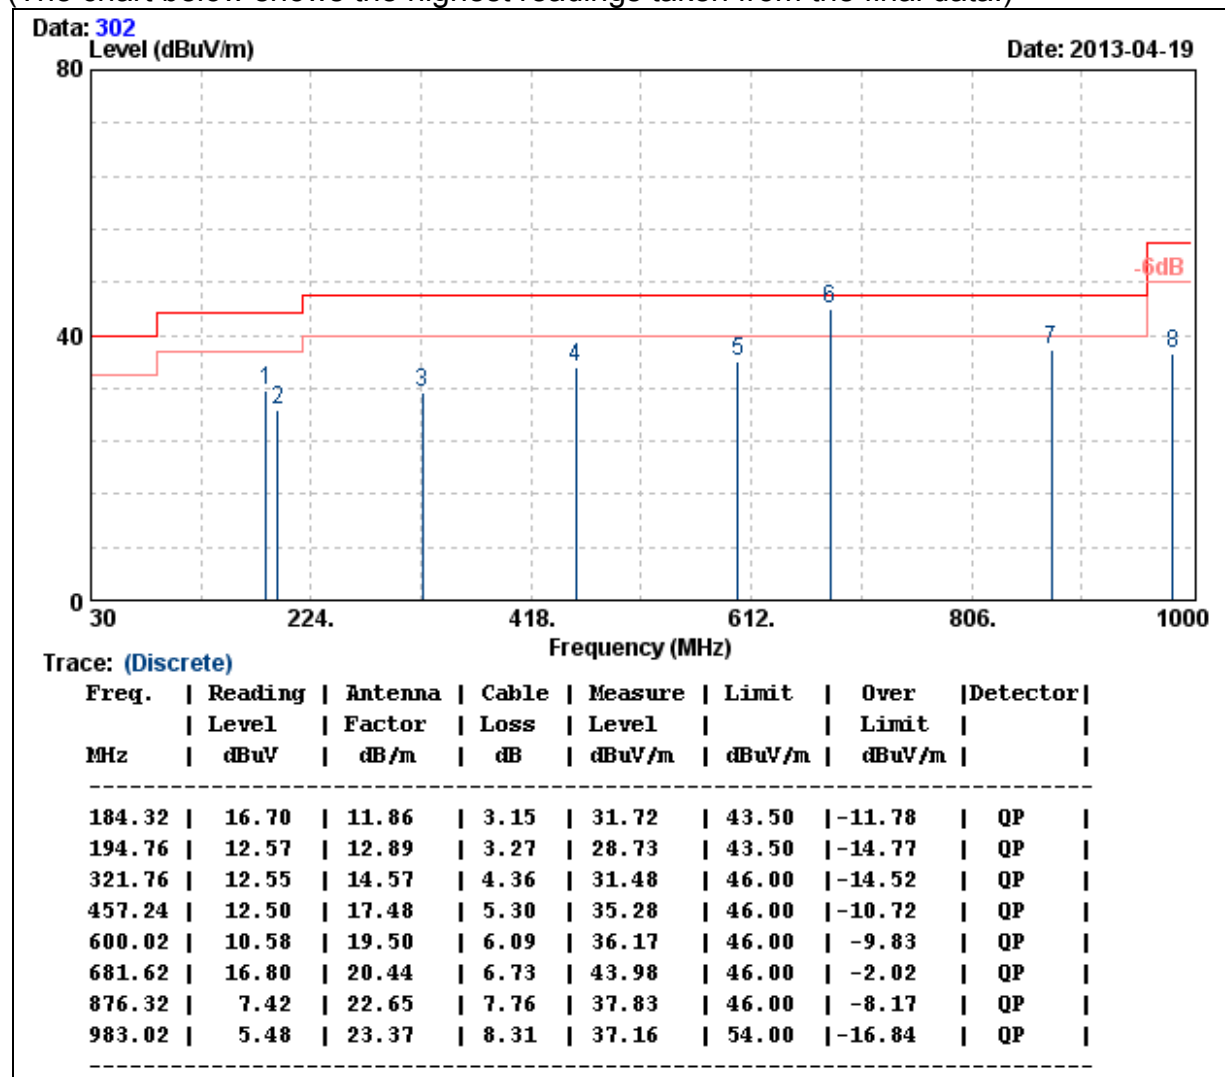

- Note: 1. QP= Quasi-peak Reading.
2. The other emission levels were very low against the limit



8.7.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

Product Name	DJ SYSTEM	Test Date	2013/02/04
Model	XDJ-R1	Test By	Vision Chang
Test Mode	IEEE 802.11b TX (CH Low)	TEMP& Humidity	27.2 , 65%

Horizontal

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
2000.10	53.46	30.40	2.66	44.85	0.30	41.97	74.00	-32.03	P
2000.10	45.34	30.40	2.66	44.85	0.30	33.85	54.00	-20.15	A
* 4824.20	58.96	33.47	3.84	45.07	0.40	51.59	74.00	-22.41	P
* 4824.20	49.34	33.47	3.84	45.07	0.40	41.97	54.00	-12.03	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

Product Name	DJ SYSTEM	Test Date	2013/02/04
Model	XDJ-R1	Test By	Vision Chang
Test Mode	IEEE 802.11b TX (CH Low)	TEMP& Humidity	27.2 , 65%

Vertical

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1596.93	58.24	27.34	2.22	41.58	0.84	47.05	74.00	-26.95	P
* 1596.93	46.81	27.34	2.22	41.58	0.84	35.62	54.00	-18.38	A
* 4823.83	52.92	33.17	3.73	42.38	0.69	48.13	74.00	-25.87	P
* 4823.83	48.27	33.17	3.73	42.38	0.69	43.48	54.00	-10.52	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	DJ SYSTEM	Test Date	2013/02/04
Model	XDJ-R1	Test By	Vision Chang
Test Mode	IEEE 802.11b TX (CH Middle)	TEMP& Humidity	27.2 , 65%

Horizontal

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
2000.12	53.46	30.40	2.66	44.85	0.30	41.97	74.00	-32.03	P
2000.12	44.50	30.40	2.66	44.85	0.30	33.01	54.00	-20.99	A
* 4874.17	57.49	33.65	3.85	45.13	0.40	50.26	74.00	-23.74	P
* 4874.17	43.19	33.65	3.85	45.13	0.40	35.96	54.00	-18.04	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

Product Name	DJ SYSTEM	Test Date	2013/02/04
Model	XDJ-R1	Test By	Vision Chang
Test Mode	IEEE 802.11b TX (CH Middle)	TEMP& Humidity	27.2 , 65%

Vertical

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
2000.09	54.47	30.40	2.66	44.85	0.30	42.98	74.00	-31.02	P
2000.09	47.16	30.40	2.66	44.85	0.30	35.67	54.00	-18.33	A
* 4874.20	57.24	33.65	3.85	45.13	0.40	50.01	74.00	-23.99	P
* 4874.20	44.03	33.65	3.85	45.13	0.40	36.80	54.00	-17.20	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	DJ SYSTEM	Test Date	2013/02/04
Model	XDJ-R1	Test By	Vision Chang
Test Mode	IEEE 802.11b TX (CH High)	TEMP& Humidity	27.2 , 65%

Horizontal

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
2000.14	53.56	30.40	2.66	44.85	0.30	42.07	74.00	-31.93	P
2000.14	45.83	30.40	2.66	44.85	0.30	34.34	54.00	-19.66	A
* 4924.08	58.46	33.83	3.86	45.18	0.40	51.37	74.00	-22.63	P
* 4924.08	43.19	33.83	3.86	45.18	0.40	36.10	54.00	-17.90	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

Product Name	DJ SYSTEM	Test Date	2013/02/04
Model	XDJ-R1	Test By	Vision Chang
Test Mode	IEEE 802.11b TX (CH High)	TEMP& Humidity	27.2 , 65%

Vertical

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
2000.15	54.34	30.40	2.66	44.85	0.30	42.85	74.00	-31.15	P
2000.15	47.43	30.40	2.66	44.85	0.30	35.94	54.00	-18.06	A
* 4924.07	57.35	33.83	3.86	45.18	0.40	50.26	74.00	-23.74	P
* 4924.07	44.46	33.83	3.86	45.18	0.40	37.37	54.00	-16.63	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	DJ SYSTEM	Test Date	2013/02/04
Model	XDJ-R1	Test By	Vision Chang
Test Mode	IEEE 802.11g TX (CH Low)	TEMP& Humidity	27.2 , 65%

Horizontal

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
2000.08	54.05	30.40	2.66	44.85	0.30	42.56	74.00	-31.44	P
2000.08	45.49	30.40	2.66	44.85	0.30	34.00	54.00	-20.00	A
* 4823.98	57.63	33.47	3.84	45.07	0.40	50.26	74.00	-23.74	P
* 4823.98	49.10	33.47	3.84	45.07	0.40	41.73	54.00	-12.27	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

Product Name	DJ SYSTEM	Test Date	2013/02/04
Model	XDJ-R1	Test By	Vision Chang
Test Mode	IEEE 802.11g TX (CH Low)	TEMP& Humidity	27.2 , 65%

Vertical

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
2000.11	54.65	30.40	2.66	44.85	0.30	43.16	74.00	-30.84	P
2000.11	47.35	30.40	2.66	44.85	0.30	35.86	54.00	-18.14	A
* 4824.08	57.19	33.47	3.84	45.07	0.40	49.82	74.00	-24.18	P
* 4824.08	48.22	33.47	3.84	45.07	0.40	40.85	54.00	-13.15	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	DJ SYSTEM	Test Date	2013/02/04
Model	XDJ-R1	Test By	Vision Chang
Test Mode	IEEE 802.11g TX (CH Middle)	TEMP& Humidity	27.2 , 65%

Horizontal

TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
2000.13	54.03	30.40	2.66	44.85	0.30	42.54	74.00	-31.46	P
2000.13	44.61	30.40	2.66	44.85	0.30	33.12	54.00	-20.88	A
* 4874.09	57.36	33.65	3.85	45.13	0.40	50.13	74.00	-23.87	P
* 4874.09	43.05	33.65	3.85	45.13	0.40	35.82	54.00	-18.18	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

Product Name	DJ SYSTEM	Test Date	2013/02/04
Model	XDJ-R1	Test By	Vision Chang
Test Mode	IEEE 802.11g TX (CH Middle)	TEMP& Humidity	27.2 , 65%

Vertical

TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
2000.14	54.18	30.40	2.66	44.85	0.30	42.69	74.00	-31.31	P
2000.14	46.84	30.40	2.66	44.85	0.30	35.35	54.00	-18.65	A
* 4874.07	57.13	33.65	3.85	45.13	0.40	49.90	74.00	-24.10	P
* 4874.07	43.96	33.65	3.85	45.13	0.40	36.73	54.00	-17.27	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	DJ SYSTEM	Test Date	2013/02/04
Model	XDJ-R1	Test By	Vision Chang
Test Mode	IEEE 802.11g TX (CH High)	TEMP& Humidity	27.2 , 65%

Horizontal

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
2000.13	53.45	30.40	2.66	44.85	0.30	41.96	74.00	-32.04	P
2000.13	46.28	30.40	2.66	44.85	0.30	34.79	54.00	-19.21	A
* 4924.01	57.37	33.83	3.86	45.18	0.40	50.28	74.00	-23.72	P
* 4924.01	42.86	33.83	3.86	45.18	0.40	35.77	54.00	-18.23	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

Product Name	DJ SYSTEM	Test Date	2013/02/04
Model	XDJ-R1	Test By	Vision Chang
Test Mode	IEEE 802.11g TX (CH High)	TEMP& Humidity	27.2 , 65%

Vertical

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
2000.12	53.89	30.40	2.66	44.85	0.30	42.40	74.00	-31.60	P
2000.12	46.40	30.40	2.66	44.85	0.30	34.91	54.00	-19.09	A
* 4924.03	57.56	33.83	3.86	45.18	0.40	50.47	74.00	-23.53	P
* 4924.03	44.18	33.83	3.86	45.18	0.40	37.09	54.00	-16.91	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:


1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



8.7.4 RESTRICTED BAND EDGES


Detector mode : Peak

Polarity : Horizontal

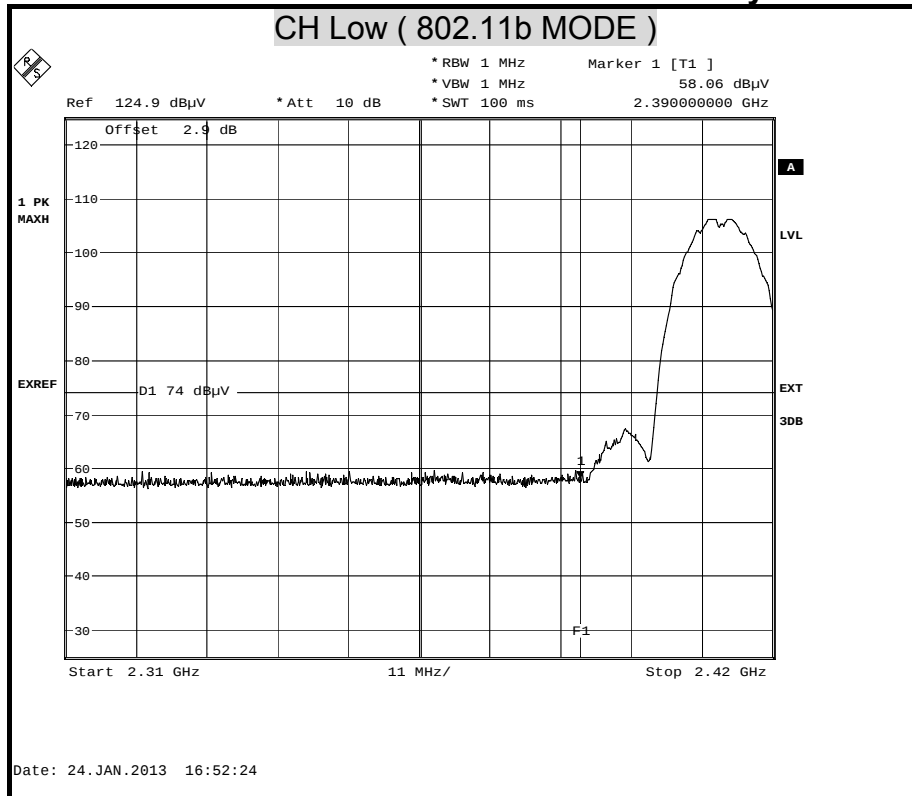

Detector mode : Average


Polarity : Horizontal

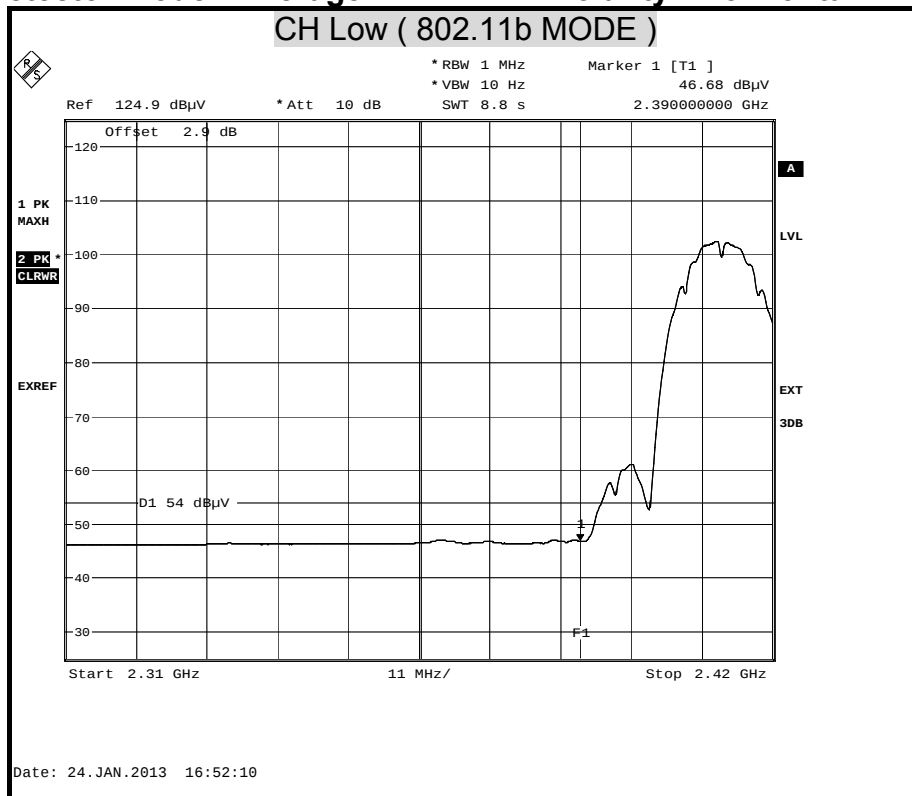




Detector mode : Peak

Polarity : Vertical

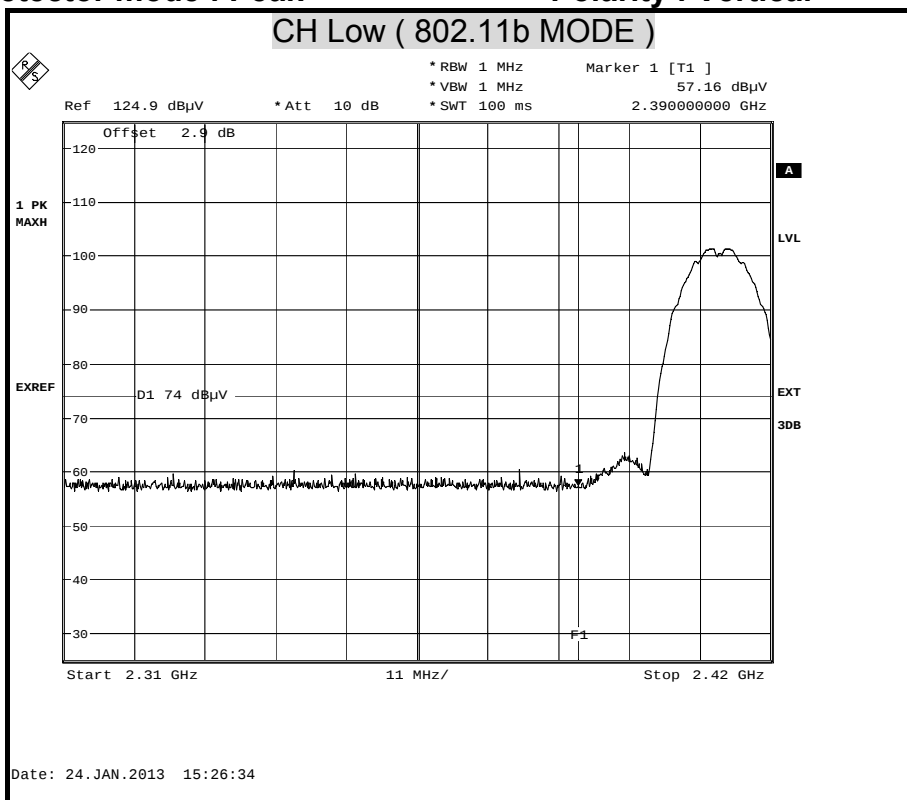

Detector mode : Average


Polarity : Vertical

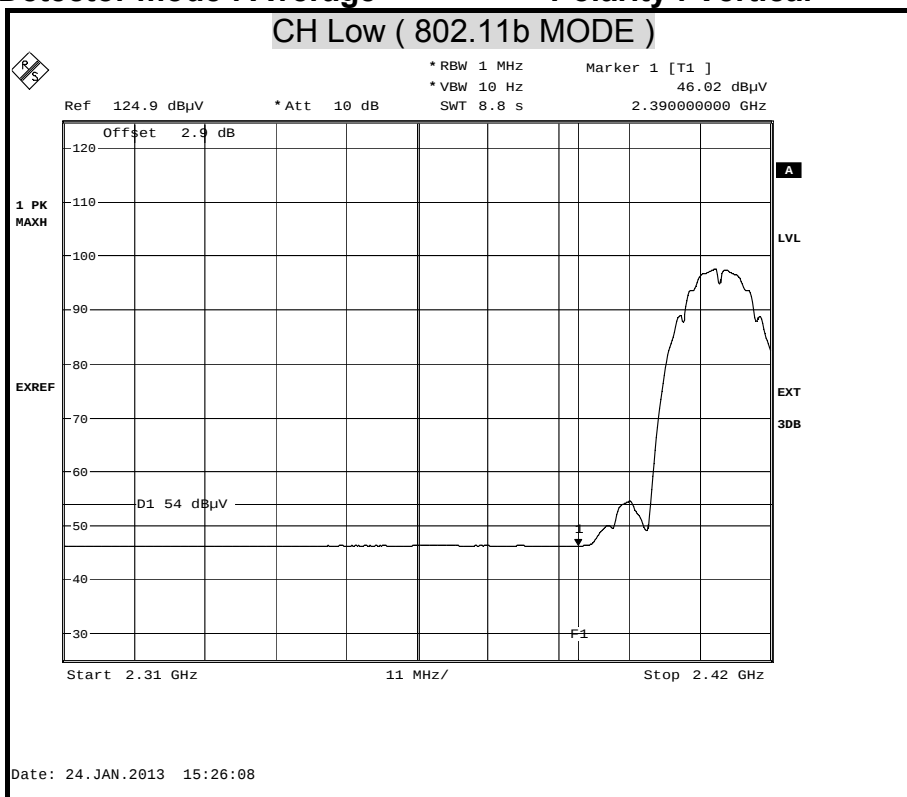




Detector mode : Peak

Polarity : Horizontal

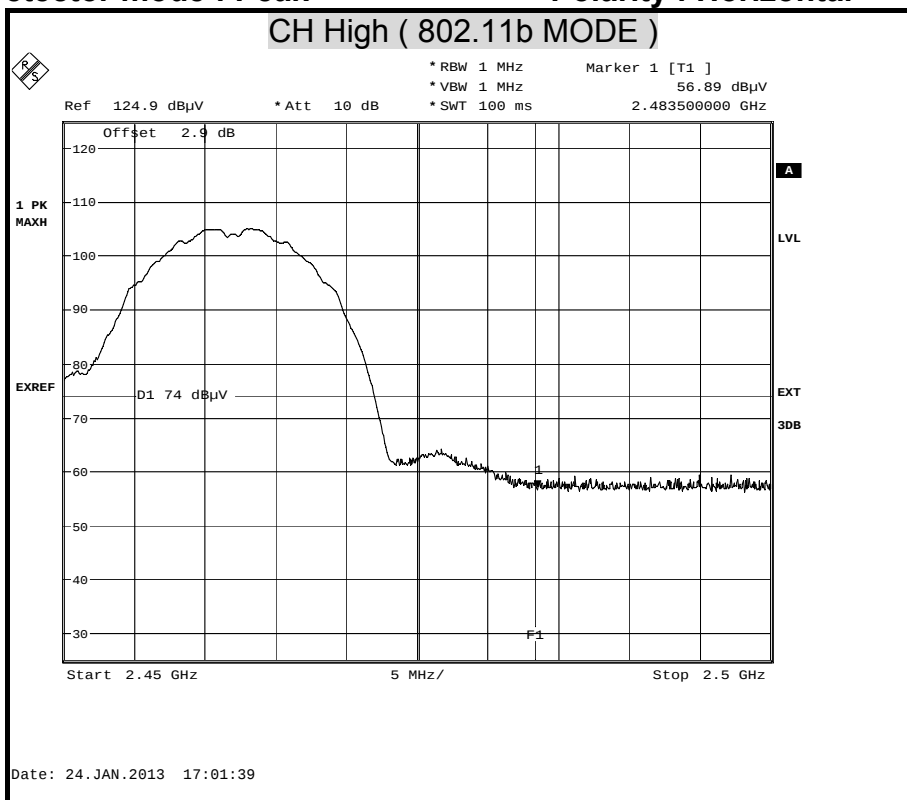

Detector mode : Average


Polarity : Horizontal

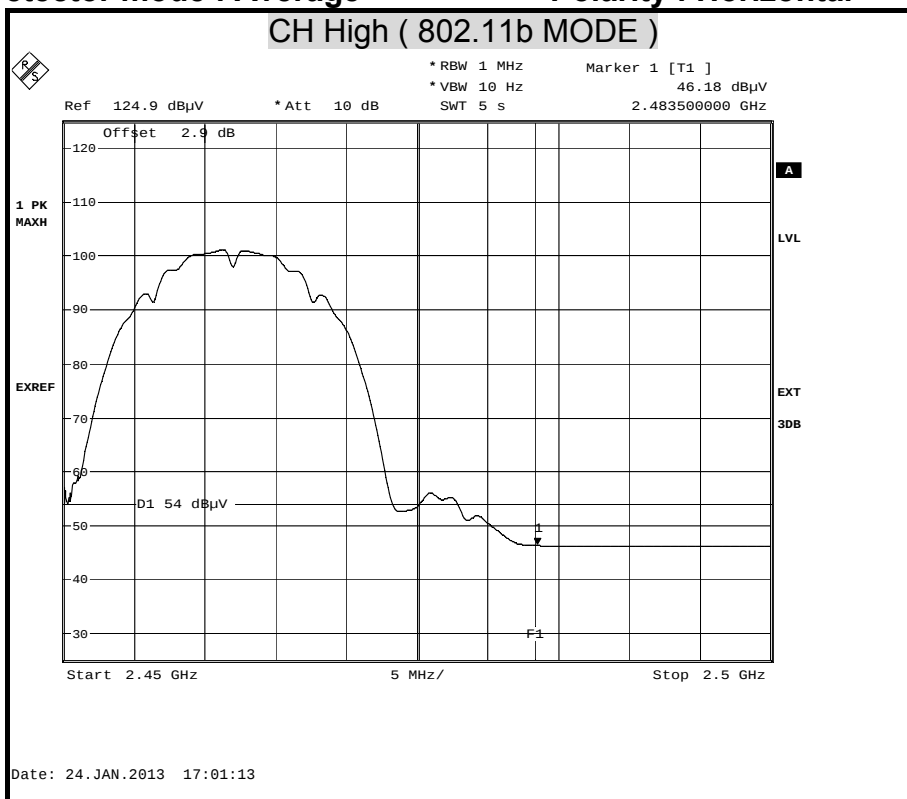




Detector mode : Peak

Polarity : Vertical

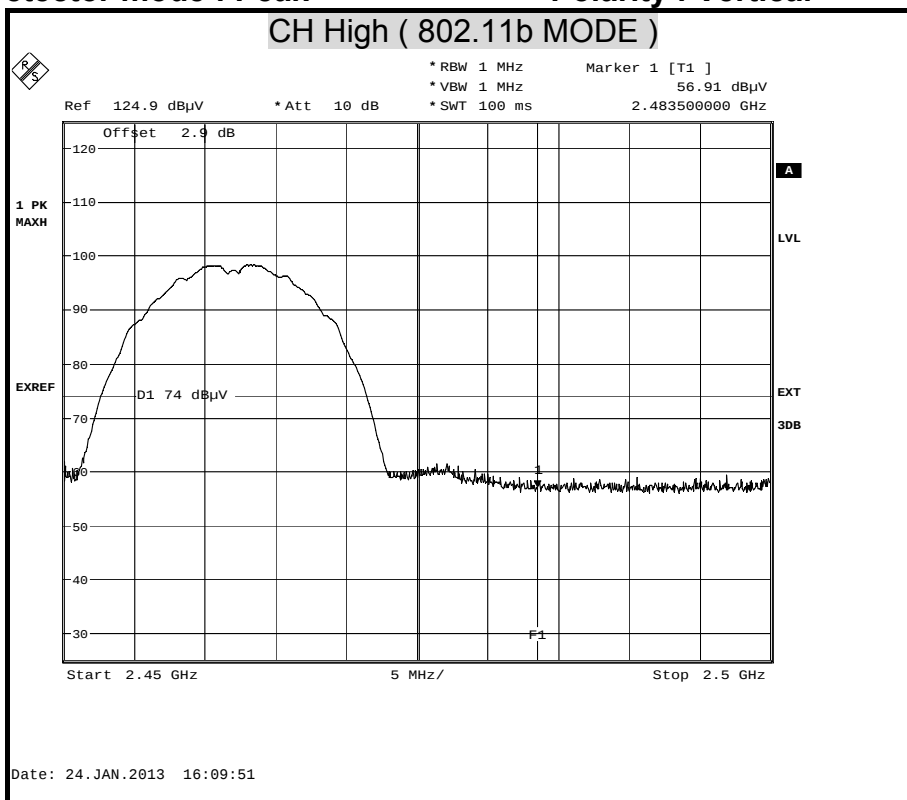

Detector mode : Average


Polarity : Vertical

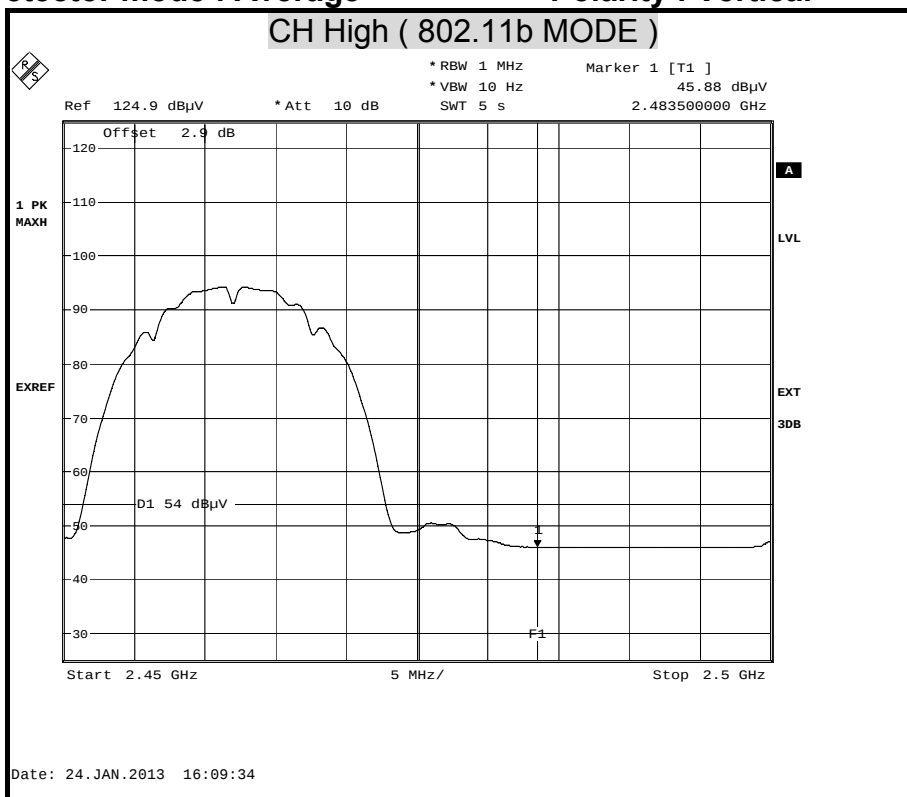




Detector mode : Peak

Polarity : Horizontal

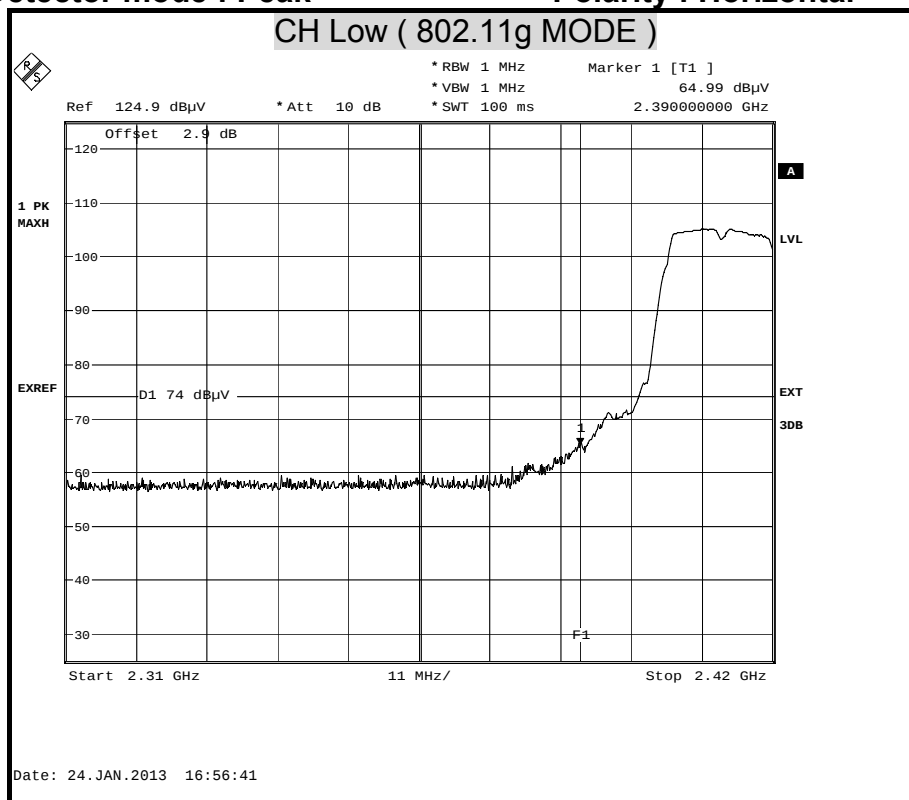

Detector mode : Average


Polarity : Horizontal

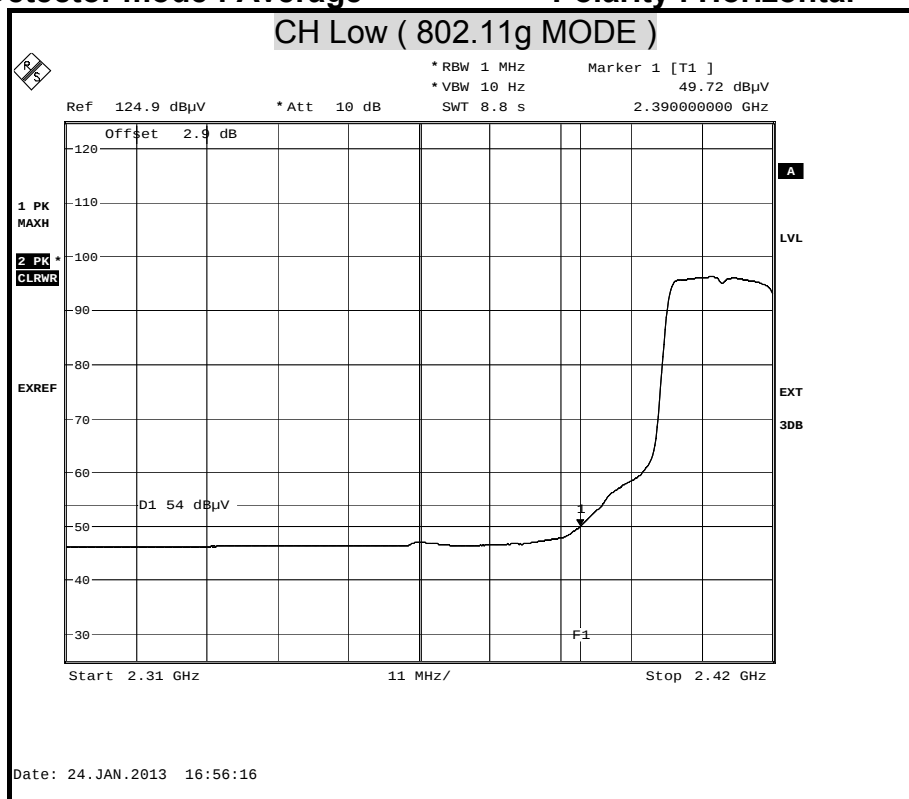




Detector mode : Peak

Polarity : Vertical

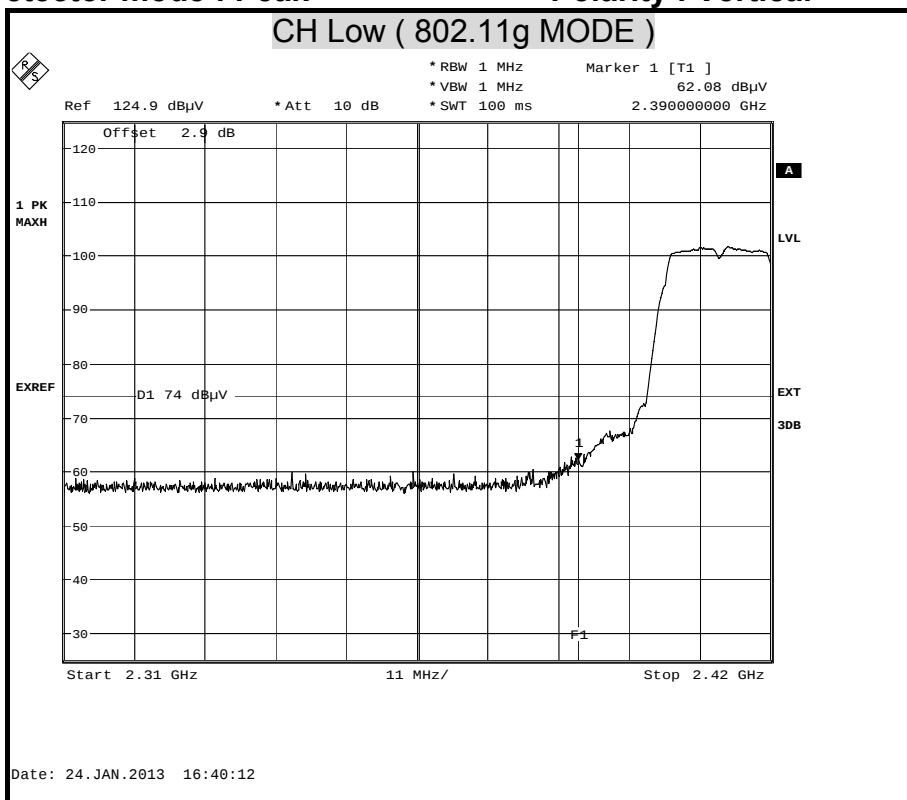

Detector mode : Average


Polarity : Vertical

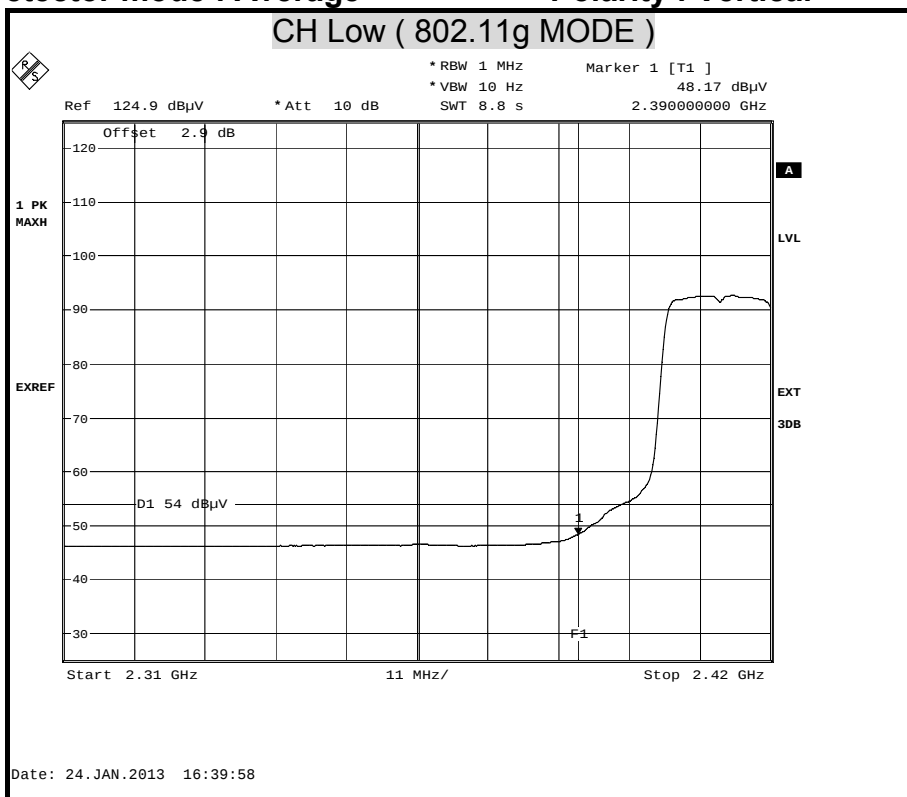




Detector mode : Peak

Polarity : Horizontal

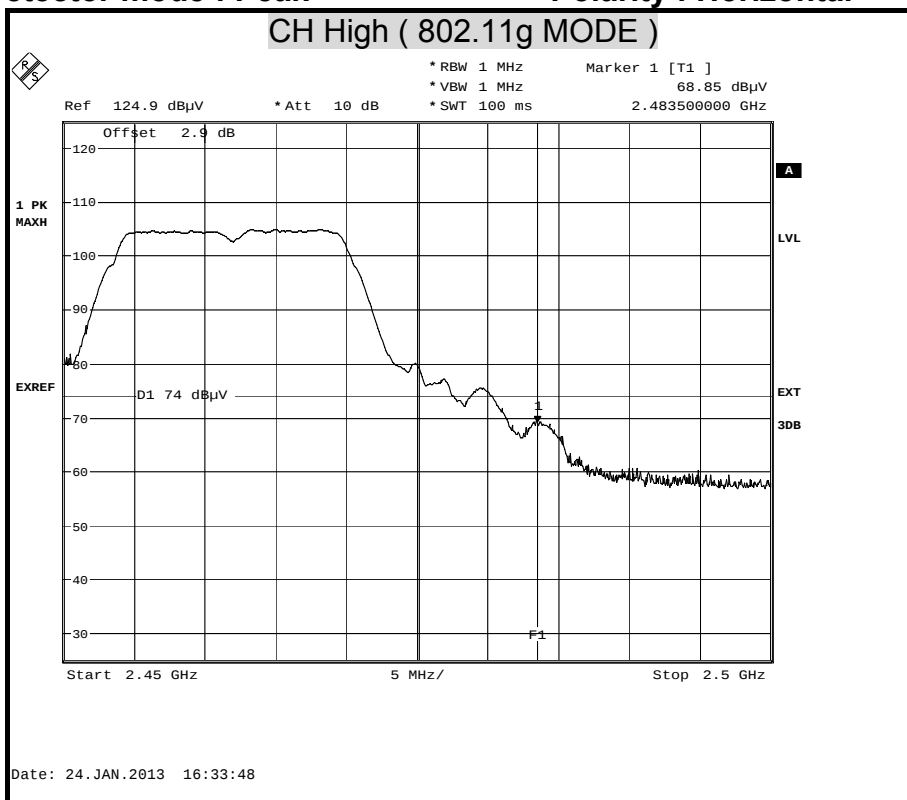

Detector mode : Average


Polarity : Horizontal

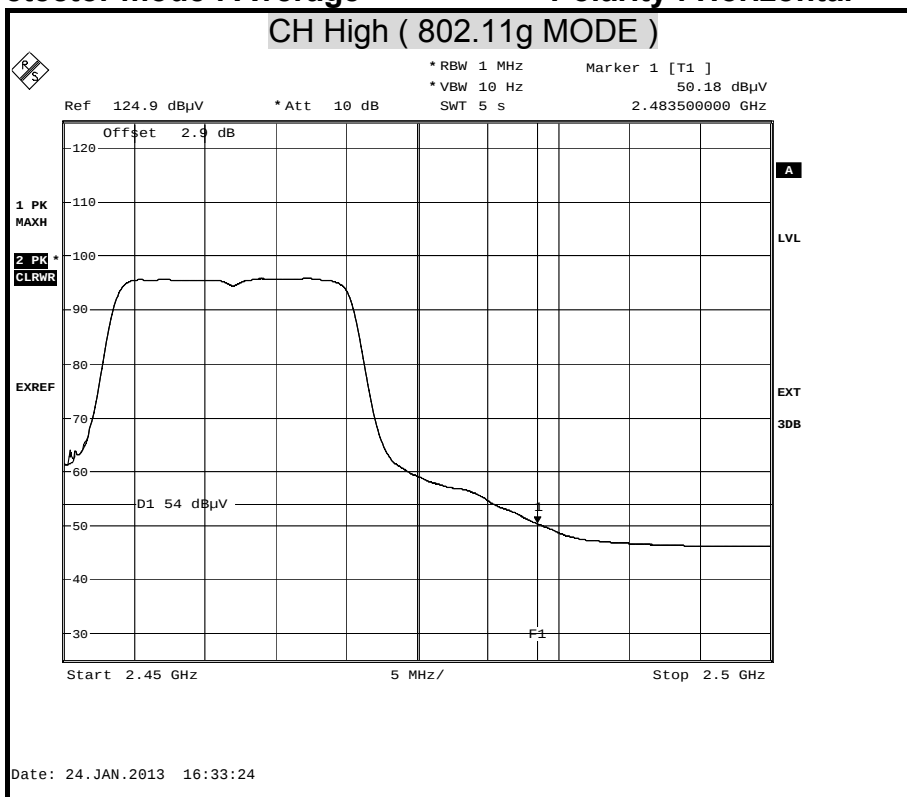




Detector mode : Peak

Polarity : Vertical

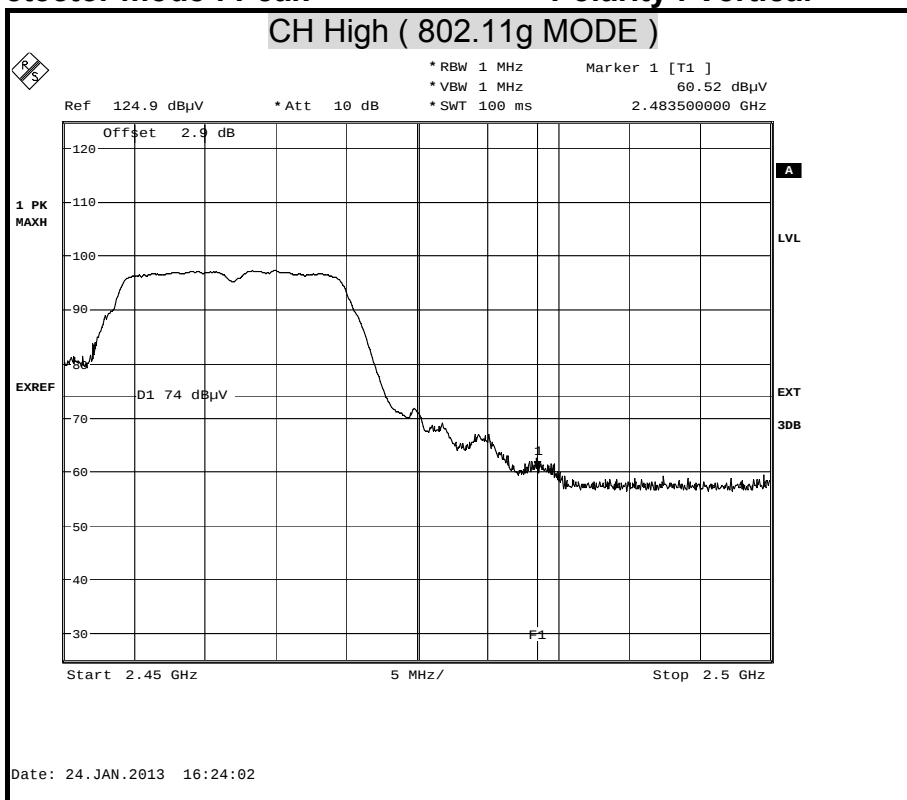

Detector mode : Average

Polarity : Vertical

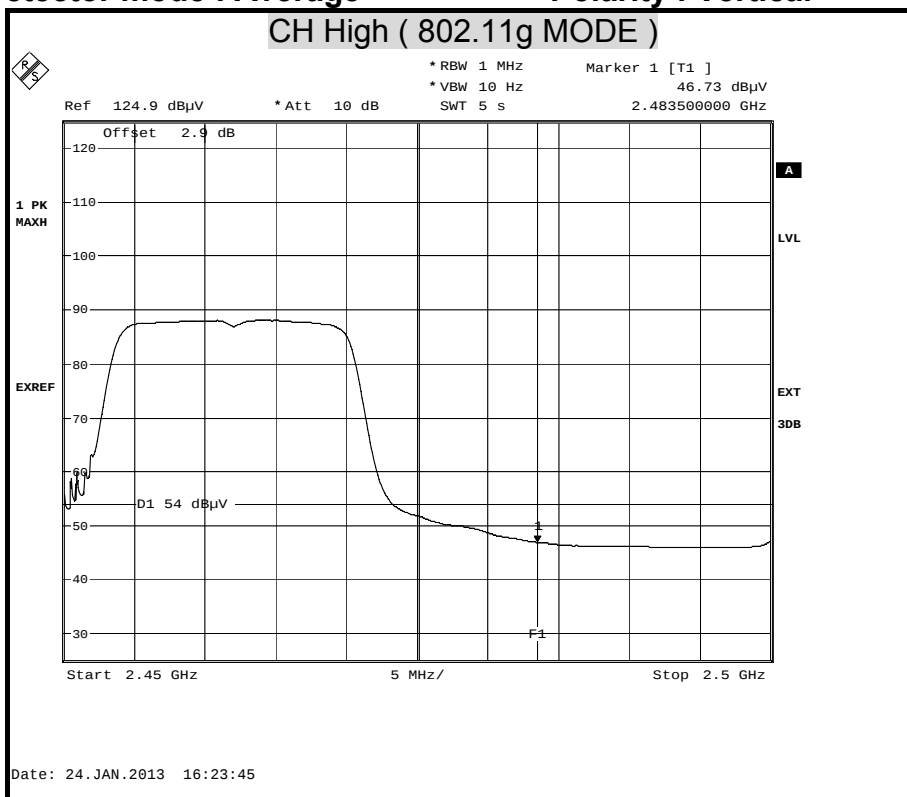



8.8 POWERLINE CONDUCTED EMISSIONS

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ v)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50


TEST EQUIPMENTS

The following test equipments are used during the conducted power line tests :

Conducted Emission room #1				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N.	SCHWARZBECK	NNLK 8130	8130124	SEP. 30, 2013
	Rohde & Schwarz	ESH 3-Z5	840062/021	JUL. 31, 2013
TEST RECEIVER	Rohde & Schwarz	ESCS 30	100348	JUL. 23, 2013
TYPE N COAXIAL CABLE	CCS	BNC50	11	OCT. 30, 2013
Test S/W	e-3 (5.04211c) R&S (2.27)			



TEST SETUP

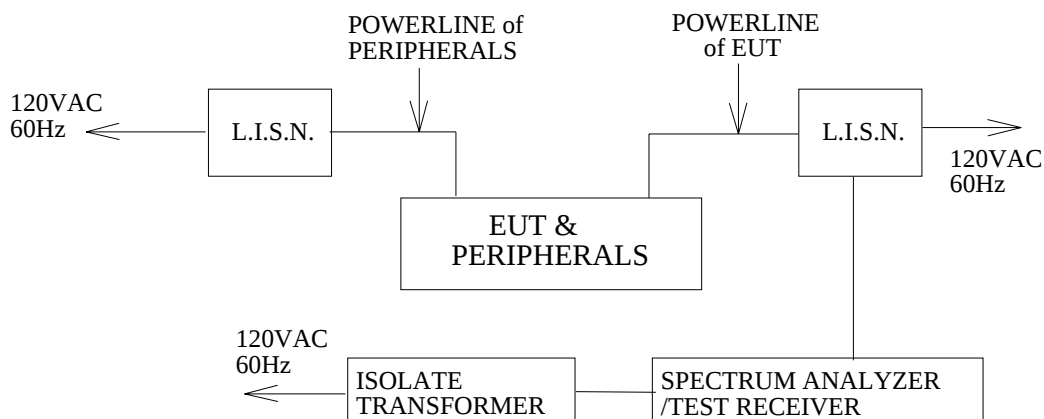

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

TEST RESULTS


No non-compliance noted.



CONDUCTED RF VOLTAGE MEASUREMENT

Product Name	DJ SYSTEM	Test Date	2013/04/23
Model	XDJ-R1	Test By	Sam Shen
Test Mode	Link XDJ-R1 to PC, CD : ON, USB DISK : ON, WLAN : ON, AUX IN : ON, MIC : ON, Line/Phono SW : Line , AUX GAIN : 12dB	TEMP& Humidity	26 , 62%

LINE

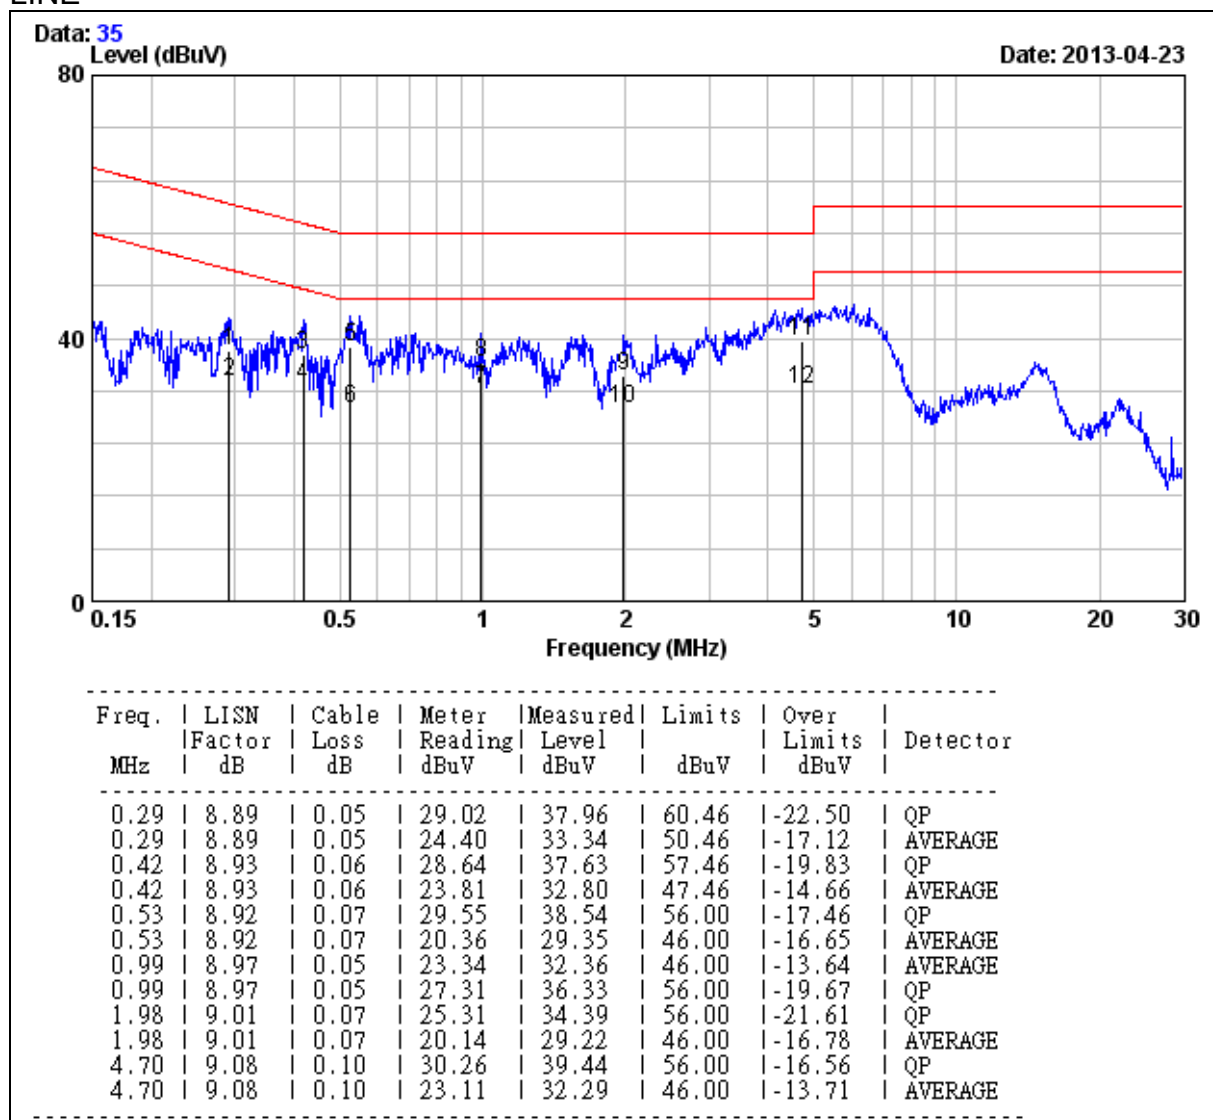


REMARK:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



Product Name	DJ SYSTEM	Test Date	2013/04/23
Model	XDJ-R1	Test By	Sam Shen
Test Mode	Link XDJ-R1 to PC, CD : ON, USB DISK : ON, WLAN : ON, AUX IN : ON, MIC : ON, Line/Phono SW : Line , AUX GAIN : 12dB	TEMP& Humidity	26 , 62%

NEUTRAL

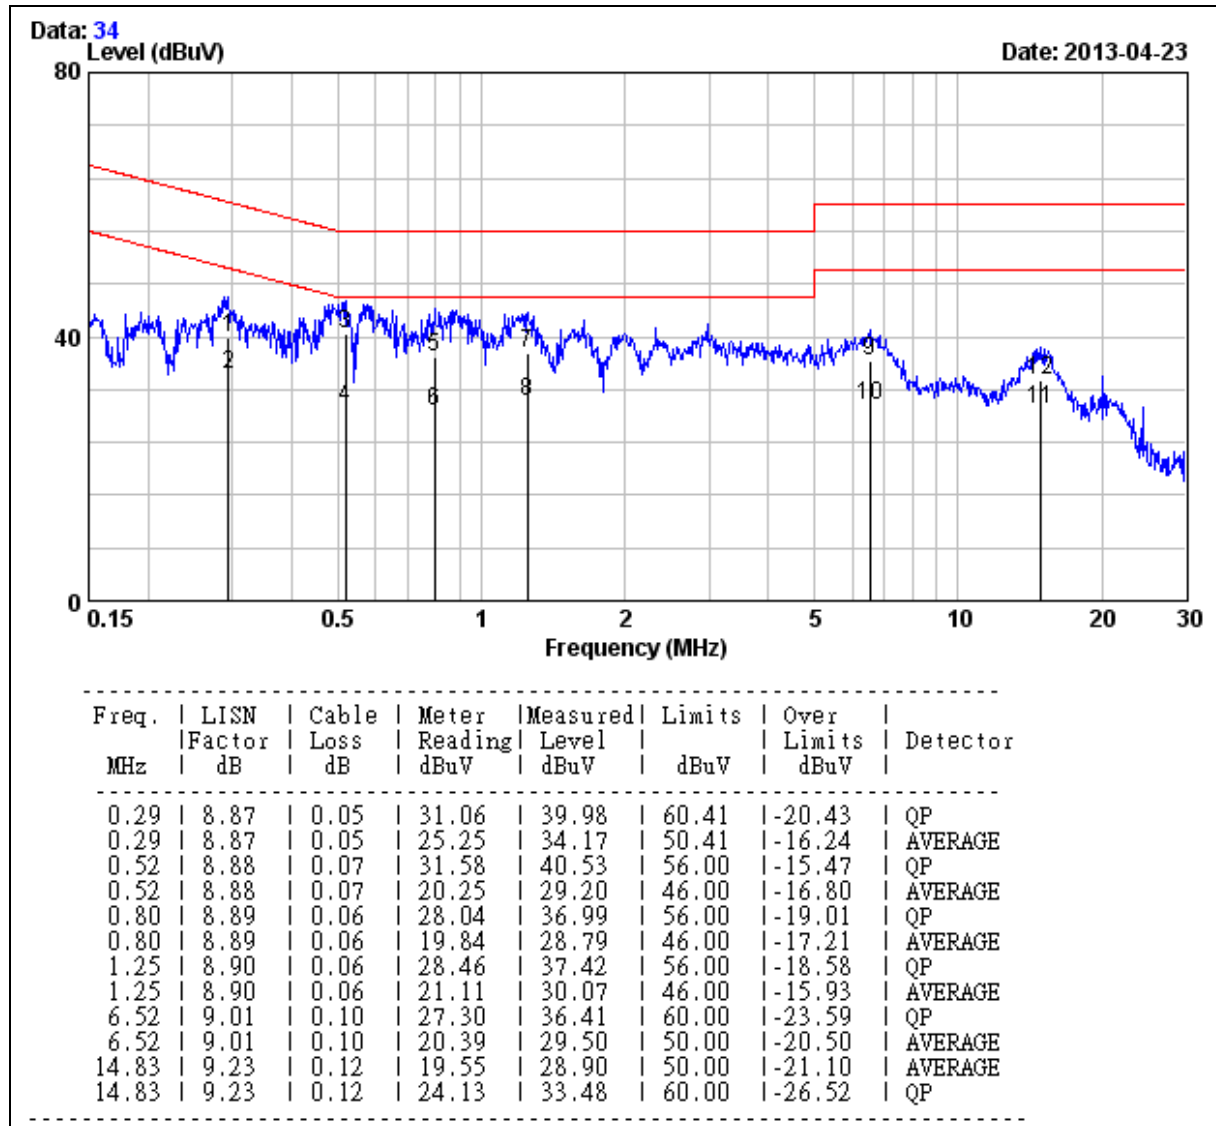

REMARK:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



9. ANTENNA REQUIREMENT

9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 ANTENNA CONNECTED CONSTRUCTION

PCB antenna *1 (1TX1RX)

Manufacture: ASIX Electronics Corporation

Model: AXM22001-2A-C

Gain: 0 dBi

Type: Integrated PCB antenna