



FCC RF Test Report

APPLICANT : Guangdong OPPO Mobile Telecommunications Corp., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : OPPO
MODEL NAME : CPH2135
FCC ID : R9C-CPH2135
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Jun. 12, 2020 and testing was completed on Jun. 29, 2020. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Test Software	7
1.8 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode	10
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	13
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	17
3.4 Unwanted Emissions Measurement	19
3.5 AC Conducted Emission Measurement.....	23
3.6 Automatically Discontinue Transmission	25
3.7 Antenna Requirements.....	26
4 LIST OF MEASURING EQUIPMENT	27
5 UNCERTAINTY OF EVALUATION.....	28
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR061210F	Rev. 01	Initial issue of report	Aug. 10, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 15.91 dB at 5945.80 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.15 dB at 0.41 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

NO.18 HaiBin Road, Wusha Village, Chang An Town, DongGuan City, GuangDong, China

1.2 Manufacturer

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

NO.18 HaiBin Road, Wusha Village, Chang An Town, DongGuan City, GuangDong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	OPPO
Model Name	CPH2135
FCC ID	R9C-CPH2135
EUT supports Radios application	GSM/WCDMA/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Conducted: 867522050019574/867522050019566 Conduction: 867522050019533/867522050019525 Radiation: 867522050019616/867522050019608
HW Version	11
SW Version	ColorOS V7.2
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 16.43 dBm / 0.0440 W 802.11n HT20 : 15.19 dBm / 0.0330 W 802.11n HT40 : 15.03 dBm / 0.0318 W 802.11ac VHT20: 16.10 dBm / 0.0407 W 802.11ac VHT40: 15.70 dBm / 0.0372 W 802.11ac VHT80: 15.52 dBm / 0.0356 W
99% Occupied Bandwidth	802.11a : 16.73 MHz 802.11ac VHT20 : 17.88 MHz 802.11ac VHT40 : 36.46 MHz 802.11ac VHT80 : 76.72 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	PIFA Antenna with gain -3.0 dBi

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan Shenzhen, 518055 People's Republic of China TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11a	6 Mbps
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN(5G) Link + Battery 1 + Earphone + USB Cable(Charging from Adapter 1)
Remark: For Radiated Test Cases, The tests were performance with Adapter 1, Battery 1, Earphone and USB Cable.	


Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

For Radiation

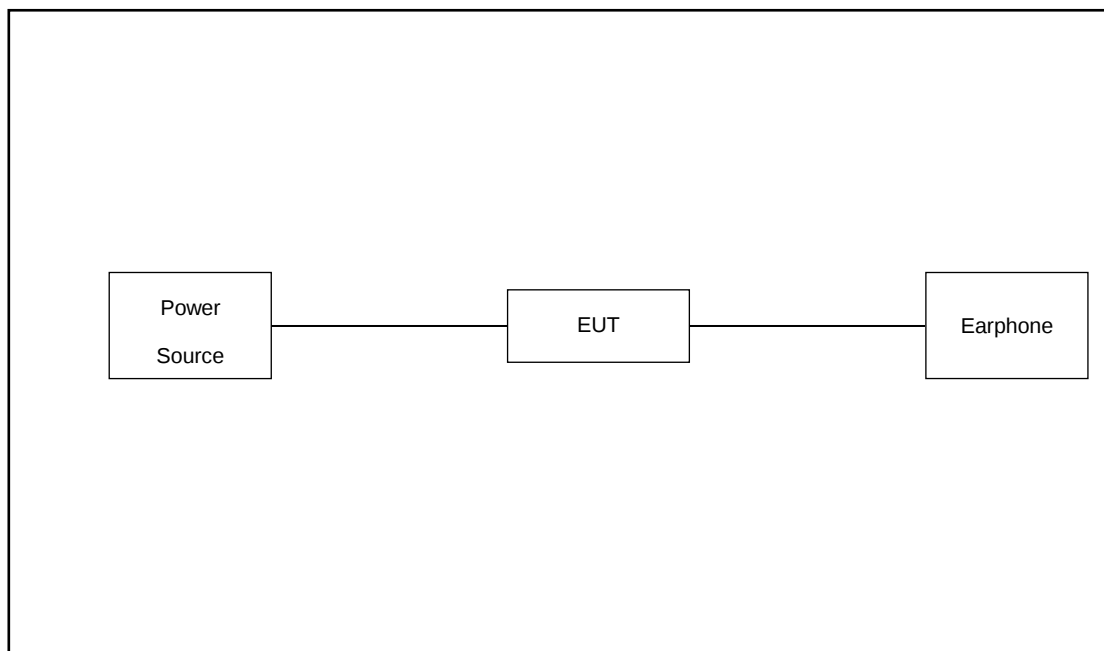

For Conducted Emission

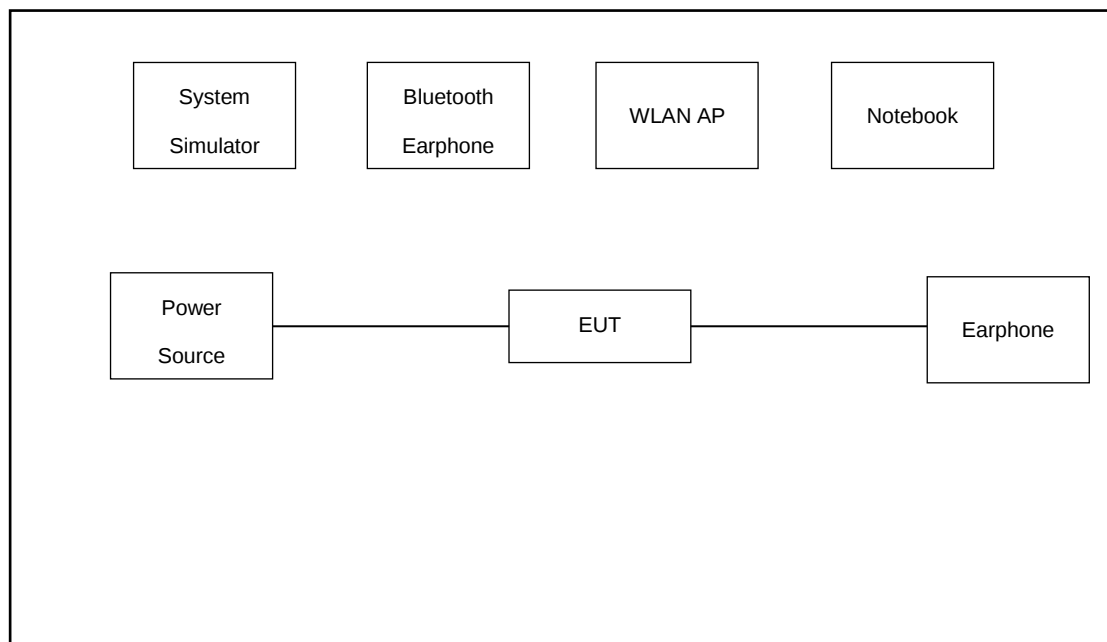

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.1 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.1 + 20 = 25.1 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

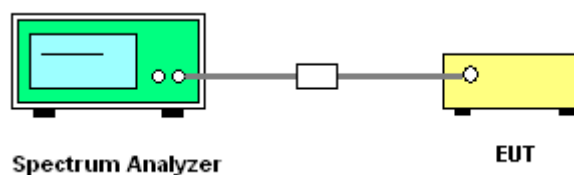

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

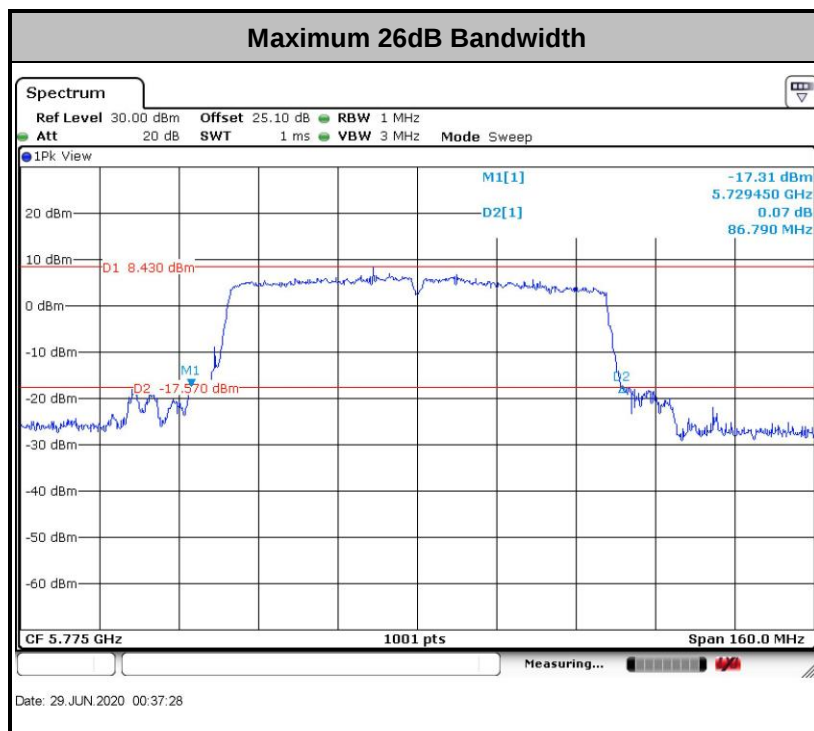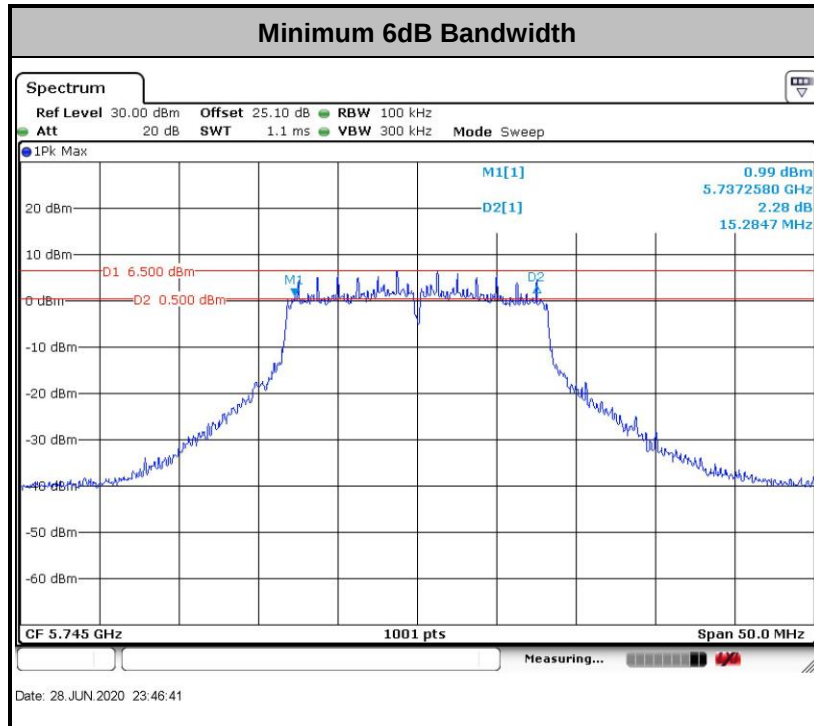

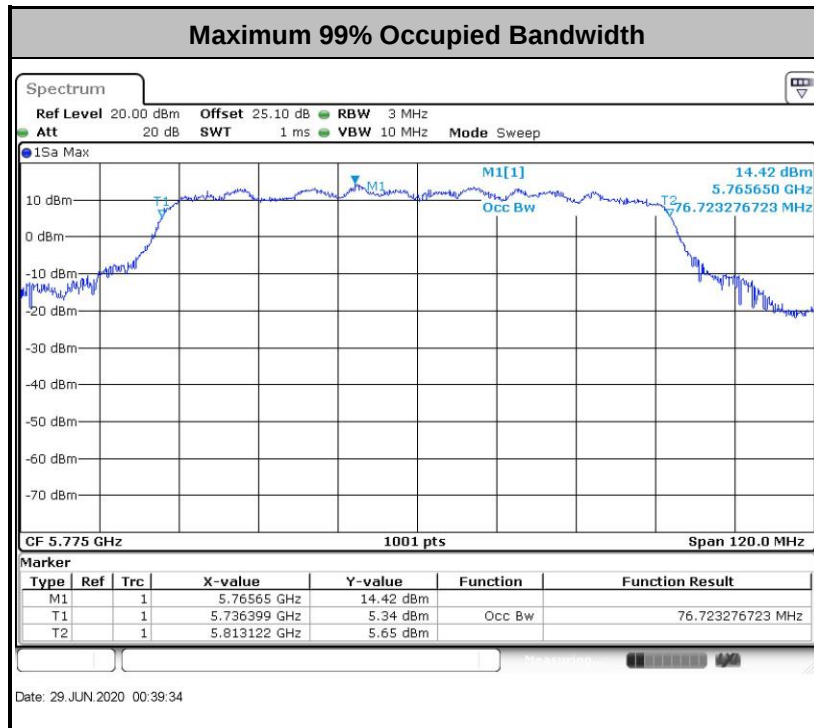

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

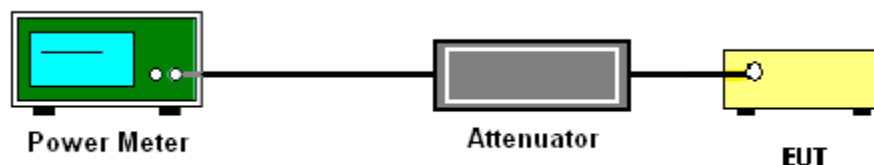

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

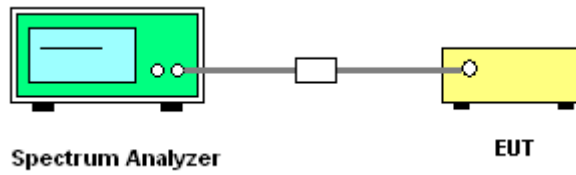

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

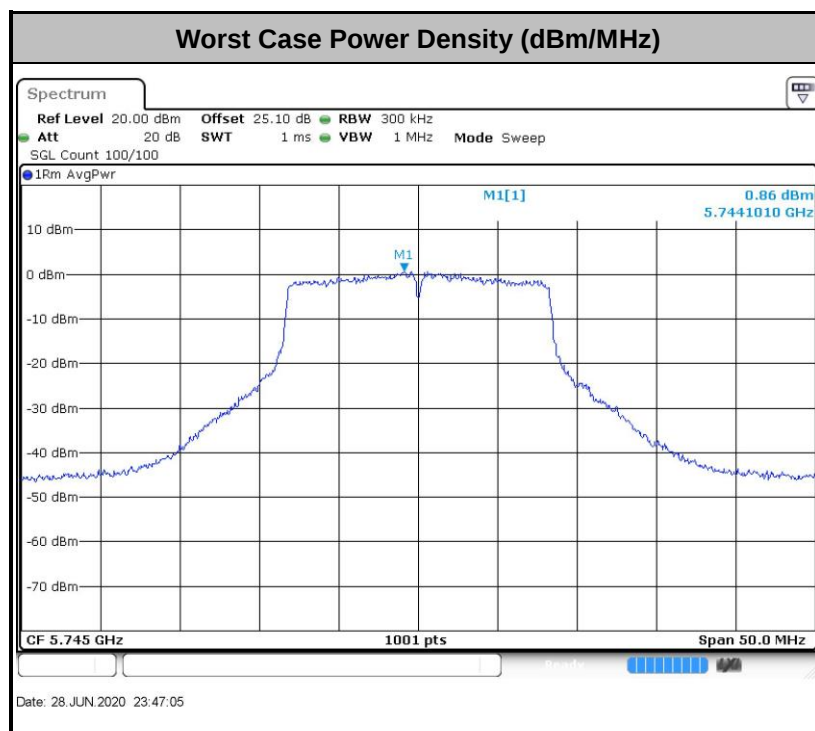

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.8$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

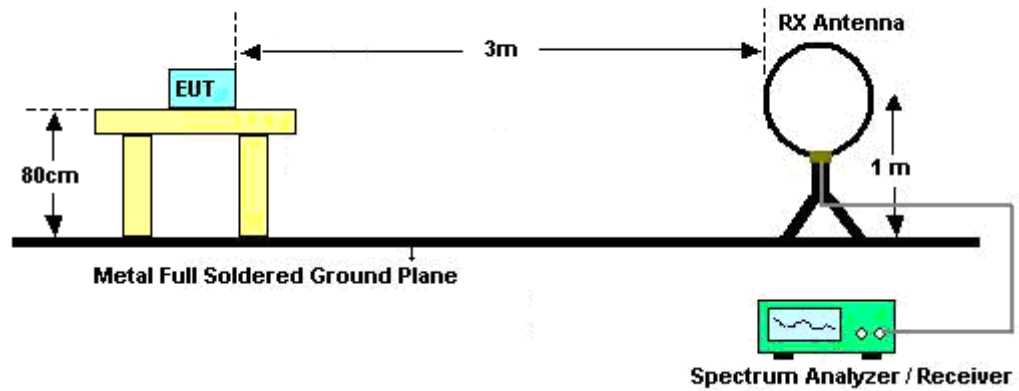

For radiated emissions from 30MHz to 1GHz

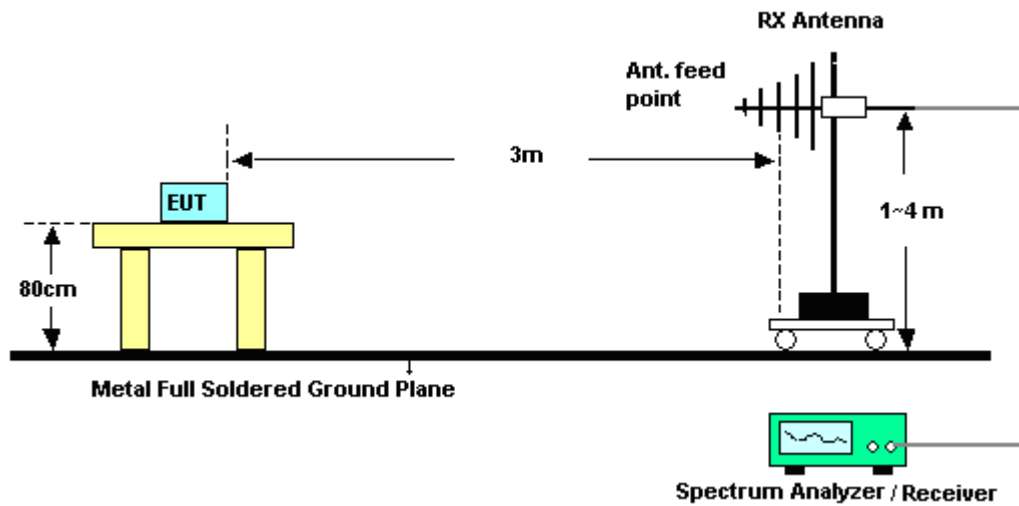

For radiated emissions above 1GHz

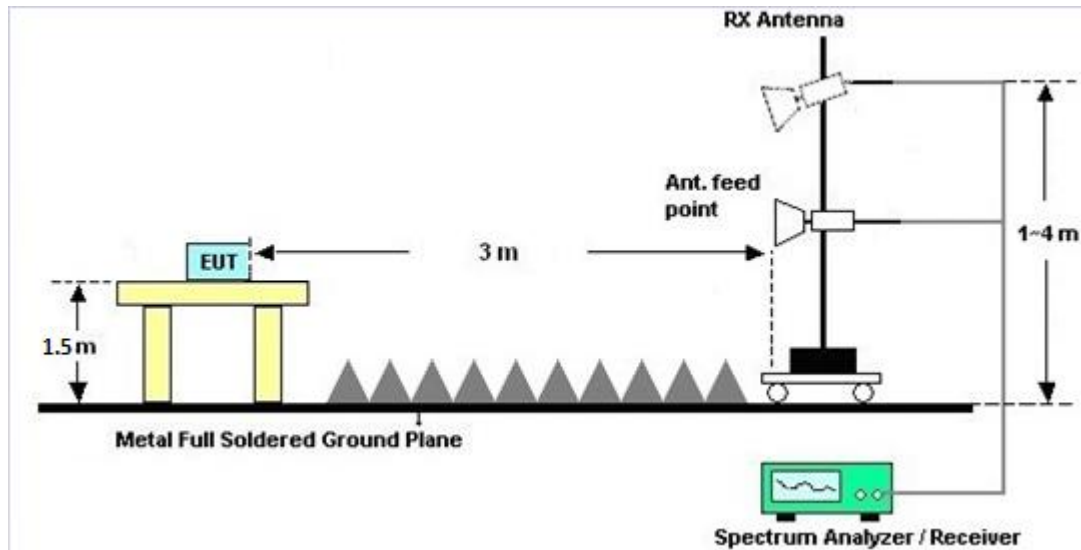

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

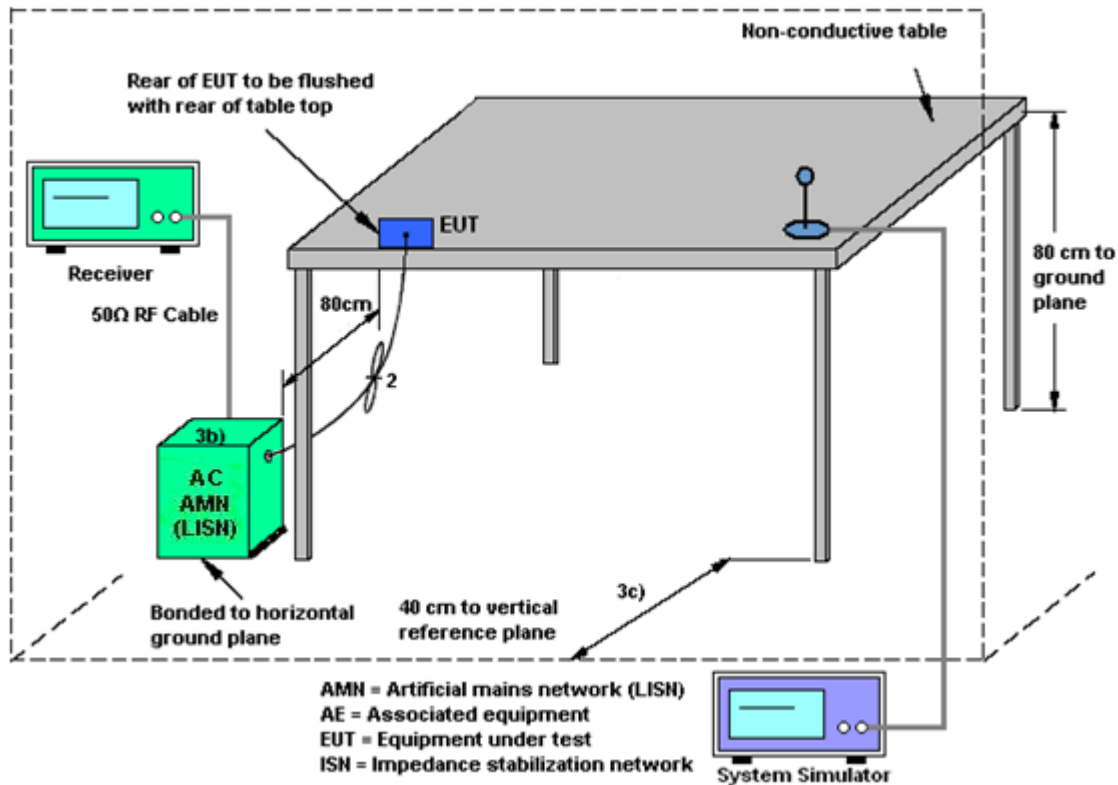

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 16, 2010	Jun. 28, 2020~ Jun. 29, 2020	Apr. 15, 2021	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 26, 2019	Jun. 28, 2020~ Jun. 29, 2020	Dec. 25, 2020	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 26, 2019	Jun. 28, 2020~ Jun. 29, 2020	Dec. 25, 2020	Conducted (TH01-SZ)
DC Power Supply	GWINSTEK	AnritsuGPS-3030D	EM882636	Max 30V	Apr. 16, 2010	Jun. 28, 2020~ Jun. 29, 2020	Apr. 15, 2021	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Dec. 26, 2019	Jun. 28, 2020~ Jun. 29, 2020	Dec. 25, 2020	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 17, 2020	Jun. 23, 2020	Apr. 16, 2021	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 17, 2020	Jun. 23, 2020	Apr. 16, 2021	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May. 28, 2020	Jun. 23, 2020	May. 27, 2022	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Apr. 17, 2020	Jun. 23, 2020	Apr. 16, 2021	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 01, 2020	Jun. 23, 2020	Mar. 31, 2021	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 22, 2019	Jun. 23, 2020	Jul. 21, 2020	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 17, 2020	Jun. 23, 2020	Apr. 16, 2021	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz~3000MHz	Oct. 18, 2019	Jun. 23, 2020	Oct. 17, 2020	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2019	Jun. 23, 2020	Oct. 17, 2020	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 23, 2019	Jun. 23, 2020	Dec. 22, 2020	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Jun. 23, 2020	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 23, 2020	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 23, 2020	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 26, 2018	Jun. 29, 2020	Dec. 25, 2020	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 17, 2019	Jun. 29, 2020	Oct. 16, 2020	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2019	Jun. 29, 2020	Oct. 16, 2020	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 23, 2019	Jun. 29, 2020	Jul. 22, 2020	Conduction (CO01-SZ)

NCR: No Calibration Required.

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Zhang Jiang	Temperature:	21~25	°C
Test Date:	2020/6/28~2020/6/29	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	16.73	24.48	15.28	0.5	Pass
11a	6Mbps	1	157	5785	16.73	24.03	15.33	0.5	Pass
11a	6Mbps	1	165	5825	16.68	24.18	15.43	0.5	Pass
VHT20	MCS 0	1	149	5745	17.88	25.43	15.93	0.5	Pass
VHT20	MCS 0	1	157	5785	17.83	24.48	15.93	0.5	Pass
VHT20	MCS 0	1	165	5825	17.83	25.28	15.93	0.5	Pass
VHT40	MCS 0	1	151	5755	36.46	41.90	35.46	0.5	Pass
VHT40	MCS 0	1	159	5795	36.46	41.81	35.43	0.5	Pass
VHT80	MCS 0	1	155	5775	76.72	86.79	75.28	0.5	Pass

TEST RESULTS DATA
Average Power Table


Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.08	16.17	30.00	-3.00		Pass
11a	6Mbps	1	157	5785	0.08	16.28	30.00	-3.00		Pass
11a	6Mbps	1	165	5825	0.08	16.43	30.00	-3.00		Pass
HT20	MCS 0	1	149	5745	0.08	15.01	30.00	-3.00		Pass
HT20	MCS 0	1	157	5785	0.08	15.13	30.00	-3.00		Pass
HT20	MCS 0	1	165	5825	0.08	15.19	30.00	-3.00		Pass
HT40	MCS 0	1	151	5755	0.16	15.03	30.00	-3.00		Pass
HT40	MCS 0	1	159	5795	0.16	14.70	30.00	-3.00		Pass
VHT20	MCS 0	1	149	5745	0.08	15.88	30.00	-3.00		Pass
VHT20	MCS 0	1	157	5785	0.08	15.98	30.00	-3.00		Pass
VHT20	MCS 0	1	165	5825	0.08	16.10	30.00	-3.00		Pass
VHT40	MCS 0	1	151	5755	0.18	15.70	30.00	-3.00		Pass
VHT40	MCS 0	1	159	5795	0.18	15.68	30.00	-3.00		Pass
VHT80	MCS 0	1	155	5775	0.31	15.52	30.00	-3.00		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.08	2.22	3.15	30.00	-3.00	Pass
11a	6Mbps	1	157	5785	0.08	2.22	2.52	30.00	-3.00	Pass
11a	6Mbps	1	165	5825	0.08	2.22	2.32	30.00	-3.00	Pass
VHT20	MCS 0	1	149	5745	0.08	2.22	2.71	30.00	-3.00	Pass
VHT20	MCS 0	1	157	5785	0.08	2.22	2.29	30.00	-3.00	Pass
VHT20	MCS 0	1	165	5825	0.08	2.22	2.02	30.00	-3.00	Pass
VHT40	MCS 0	1	151	5755	0.18	2.22	-1.04	30.00	-3.00	Pass
VHT40	MCS 0	1	159	5795	0.18	2.22	-1.45	30.00	-3.00	Pass
VHT80	MCS 0	1	155	5775	0.31	2.22	-4.62	30.00	-3.00	Pass




Appendix B. AC Conducted Emission Test Results

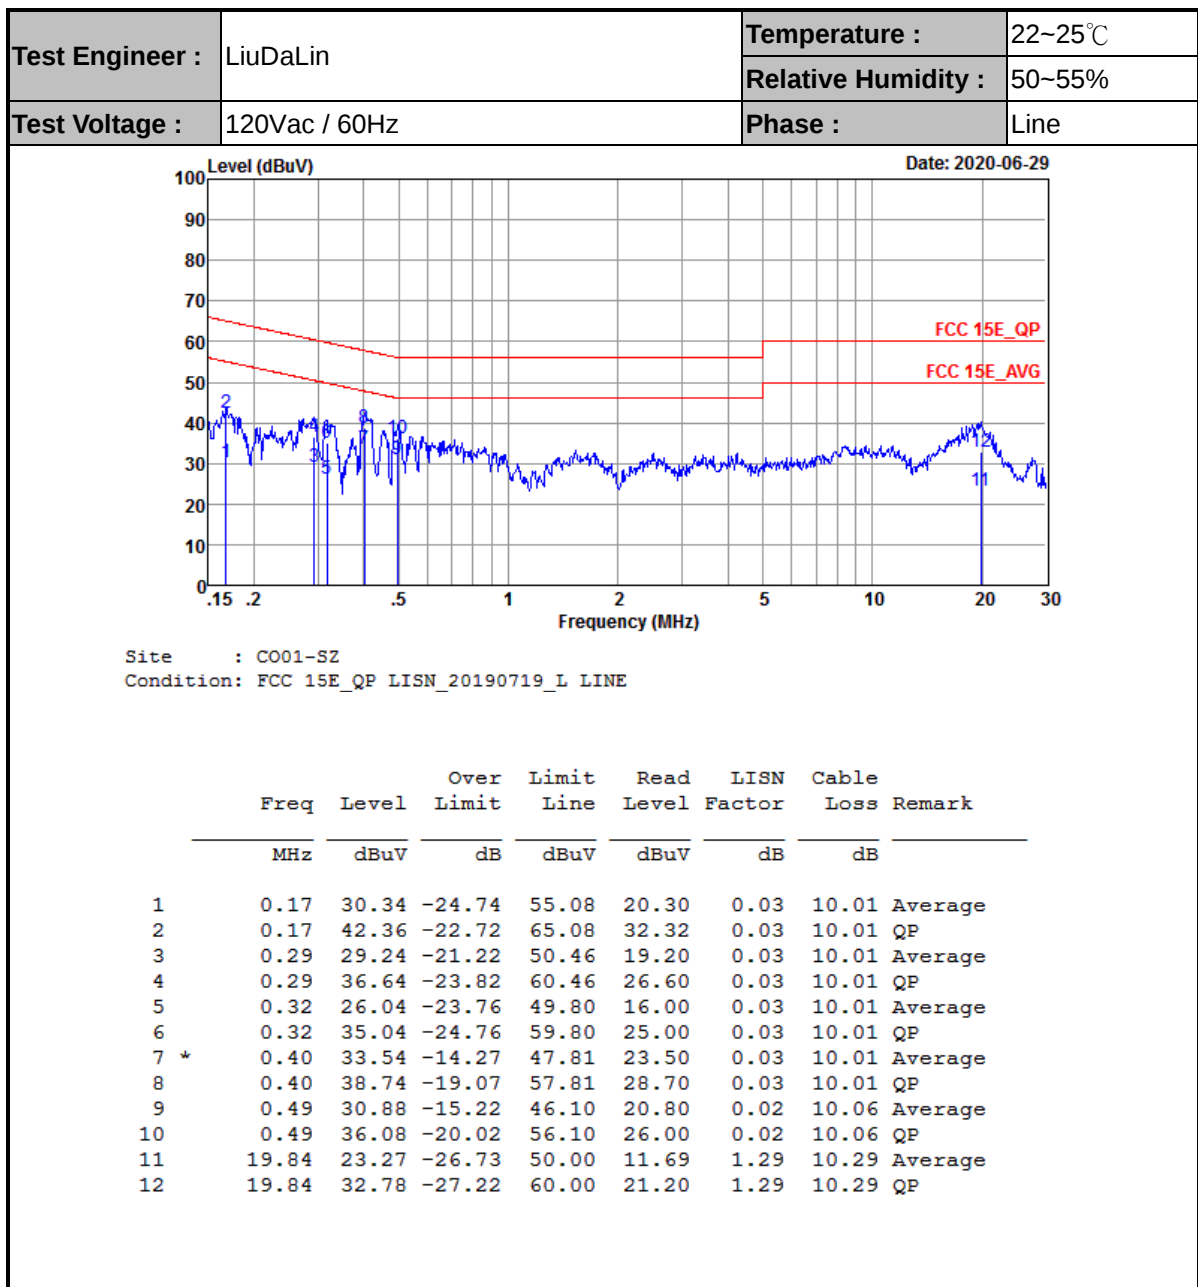



Test Engineer :	LiuDaLin	Temperature :	22~25℃
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

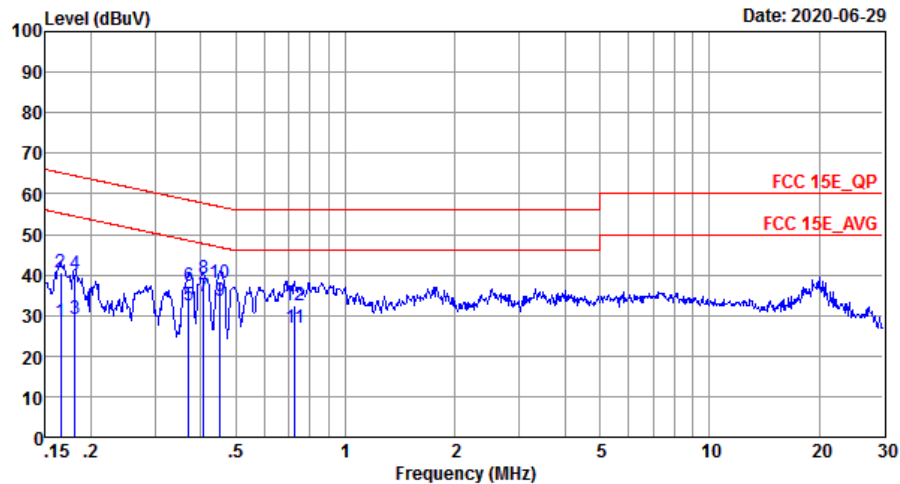

Site : CO01-SZ
Condition: FCC 15E_QP LISN_20190719_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.17	28.34	-26.87	55.21	18.30	0.03	10.01	Average
2	0.17	40.74	-24.47	65.21	30.70	0.03	10.01	QP
3	0.18	29.24	-25.22	54.46	19.20	0.03	10.01	Average
4	0.18	40.34	-24.12	64.46	30.30	0.03	10.01	QP
5	0.37	32.53	-15.94	48.47	22.50	0.02	10.01	Average
6	0.37	37.43	-21.04	58.47	27.40	0.02	10.01	QP
7 *	0.41	34.53	-13.15	47.68	24.50	0.02	10.01	Average
8	0.41	39.13	-18.55	57.68	29.10	0.02	10.01	QP
9	0.45	33.66	-13.19	46.85	23.60	0.02	10.04	Average
10	0.45	38.16	-18.69	56.85	28.10	0.02	10.04	QP
11	0.73	27.09	-18.91	46.00	17.00	0.02	10.07	Average
12	0.73	32.59	-23.41	56.00	22.50	0.02	10.07	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5626.6	49.89	-18.41	68.3	36.89	31.77	10.58	29.35	286	283	P	H
		5680	50.36	-40.12	90.48	37.3	31.85	10.59	29.38	286	283	P	H
		5718.6	53.34	-57.07	110.41	40.05	32.07	10.61	29.39	286	283	P	H
		5724.8	57.66	-64.08	121.74	44.37	32.07	10.61	29.39	286	283	P	H
	*	5745	101.92	-	-	88.6	32.1	10.62	29.4	286	283	P	H
		5745	96.1	-	-	82.78	32.1	10.62	29.4	286	283	A	H
		5641.8	50.87	-17.43	68.3	37.92	31.73	10.58	29.36	175	293	P	V
		5694.8	53.94	-47.44	101.38	40.73	32	10.59	29.38	175	293	P	V
		5717.4	54.89	-55.18	110.07	41.64	32.03	10.61	29.39	175	293	P	V
		5724.6	63.07	-58.22	121.29	49.78	32.07	10.61	29.39	175	293	P	V
	*	5745	105.96	-	-	92.64	32.1	10.62	29.4	175	293	P	V
		5745	101.18	-	-	87.86	32.1	10.62	29.4	175	293	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5605.2	50.31	-17.99	68.3	37.3	31.8	10.56	29.35	225	276	P	H
		5678.8	50.09	-39.5	89.59	37.02	31.85	10.59	29.37	225	276	P	H
		5708.8	50.35	-57.32	107.67	37.1	32.03	10.61	29.39	225	276	P	H
		5721	49.13	-63.95	113.08	35.84	32.07	10.61	29.39	225	276	P	H
	*	5785	99.16	-	-	85.77	32.17	10.64	29.42	225	276	P	H
		5785	94.32	-	-	80.93	32.17	10.64	29.42	225	276	A	H
		5850.6	49.89	-70.94	120.83	36.25	32.4	10.68	29.44	225	276	P	H
		5871.8	50.84	-55.25	106.09	37.11	32.47	10.71	29.45	225	276	P	H
		5917.2	50.8	-23.24	74.04	36.95	32.57	10.75	29.47	225	276	P	H
		5931	50.81	-17.49	68.3	36.9	32.63	10.75	29.47	225	276	P	H
		5601.8	49.85	-18.45	68.3	36.83	31.8	10.56	29.34	288	2	P	V
		5660.4	51.09	-24.91	76	38.18	31.7	10.58	29.37	288	2	P	V
		5712.8	51.41	-57.38	108.79	38.16	32.03	10.61	29.39	288	2	P	V
		5720	50.73	-60.07	110.8	37.44	32.07	10.61	29.39	288	2	P	V
	*	5785	104.35	-	-	90.96	32.17	10.64	29.42	288	2	P	V
		5785	100.1	-	-	86.71	32.17	10.64	29.42	288	2	A	V
		5851.2	50.76	-68.7	119.46	37.12	32.4	10.68	29.44	288	2	P	V
		5871.2	50.99	-55.27	106.26	37.26	32.47	10.71	29.45	288	2	P	V
		5882.6	51.41	-48.16	99.57	37.68	32.47	10.71	29.45	288	2	P	V
		5933.2	50.98	-17.32	68.3	37.07	32.63	10.75	29.47	288	2	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	100.78	-	-	87.2	32.33	10.68	29.43	287	282	P	H
	*	5825	94.17	-	-	80.59	32.33	10.68	29.43	287	282	A	H
		5855	50.39	-60.41	110.8	36.72	32.43	10.68	29.44	287	282	P	H
		5858.4	51.8	-58.05	109.85	38.11	32.43	10.71	29.45	287	282	P	H
		5900.8	52.05	-34.07	86.12	38.26	32.5	10.75	29.46	287	282	P	H
		5945.6	51.06	-17.24	68.3	37.06	32.7	10.78	29.48	287	282	P	H
	*	5825	105.87	-	-	92.29	32.33	10.68	29.43	193	296	P	V
	*	5825	100.29	-	-	86.71	32.33	10.68	29.43	193	296	A	V
		5850	53.93	-68.27	122.2	40.29	32.4	10.68	29.44	193	296	P	V
		5855	53.02	-57.78	110.8	39.35	32.43	10.68	29.44	193	296	P	V
		5880.2	52.06	-49.29	101.35	38.33	32.47	10.71	29.45	193	296	P	V
		5945.8	52.39	-15.91	68.3	38.39	32.7	10.78	29.48	193	296	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	42.84	-31.16	74	40.26	40.07	15.12	52.61	171	22	P	H
		17235	50.36	-17.94	68.3	39.96	40.33	22.6	52.53	156	274	P	H
		11490	42.1	-31.9	74	39.52	40.07	15.12	52.61	164	301	P	V
		17235	50.59	-17.71	68.3	40.19	40.33	22.6	52.53	170	360	P	V
802.11a CH 157 5785MHz		11570	42.38	-31.62	74	39.93	39.9	15.18	52.63	175	198	P	H
		17355	50.24	-18.06	68.3	38.98	40.95	22.96	52.65	189	185	P	H
		11570	41.59	-32.41	74	39.14	39.9	15.18	52.63	162	238	P	V
		17355	50.84	-17.46	68.3	39.58	40.95	22.96	52.65	141	209	P	V
802.11a CH 165 5825MHz		11650	42.12	-31.88	74	39.94	39.6	15.24	52.66	109	132	P	H
		17475	50.34	-17.96	68.3	38.3	41.5	23.31	52.77	162	329	P	H
		11650	41.89	-32.11	74	39.71	39.6	15.24	52.66	164	67	P	V
		17475	50.11	-18.19	68.3	38.07	41.5	23.31	52.77	191	26	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 149 5745MHz		5607	50.02	-18.28	68.3	37.01	31.8	10.56	29.35	325	269	P	H
		5696.8	50.14	-52.71	102.85	36.93	32	10.59	29.38	325	269	P	H
		5719.4	53.19	-57.44	110.63	39.9	32.07	10.61	29.39	325	269	P	H
		5724.6	55.18	-66.11	121.29	41.89	32.07	10.61	29.39	325	269	P	H
	*	5745	99.11	-	-	85.79	32.1	10.62	29.4	325	269	P	H
		5745	92.56	-	-	79.24	32.1	10.62	29.4	325	269	A	H
		5642.4	50.02	-18.28	68.3	37.07	31.73	10.58	29.36	230	353	P	V
		5678.6	51.8	-37.65	89.45	38.73	31.85	10.59	29.37	230	353	P	V
		5720	57.32	-53.48	110.8	44.03	32.07	10.61	29.39	230	353	P	V
		5724.8	60.4	-61.34	121.74	47.11	32.07	10.61	29.39	230	353	P	V
	*	5745	105.65	-	-	92.33	32.1	10.62	29.4	230	353	P	V
		5745	100	-	-	86.68	32.1	10.62	29.4	230	353	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 157 5785MHz		5606.2	49.52	-18.78	68.3	36.51	31.8	10.56	29.35	281	285	P	H
		5691.8	51.29	-47.88	99.17	38.08	32	10.59	29.38	281	285	P	H
		5715.6	49.97	-59.6	109.57	36.72	32.03	10.61	29.39	281	285	P	H
		5723	50.63	-67.01	117.64	37.34	32.07	10.61	29.39	281	285	P	H
	*	5785	100.32	-	-	86.93	32.17	10.64	29.42	281	285	P	H
		5785	92.97	-	-	79.58	32.17	10.64	29.42	281	285	A	H
		5852.4	49.36	-67.37	116.73	35.72	32.4	10.68	29.44	281	285	P	H
		5860.8	50.41	-58.76	109.17	36.72	32.43	10.71	29.45	281	285	P	H
		5898.4	50.96	-36.93	87.89	37.17	32.5	10.75	29.46	281	285	P	H
		5937.8	51.26	-17.04	68.3	37.33	32.63	10.78	29.48	281	285	P	H
		5608	50.62	-17.68	68.3	37.61	31.8	10.56	29.35	312	352	P	V
		5698.2	50.97	-52.91	103.88	37.76	32	10.59	29.38	312	352	P	V
		5705.4	49.72	-56.99	106.71	36.47	32.03	10.61	29.39	312	352	P	V
		5724.8	50.7	-71.04	121.74	37.41	32.07	10.61	29.39	312	352	P	V
	*	5785	105.16	-	-	91.77	32.17	10.64	29.42	312	352	P	V
		5785	99.13	-	-	85.74	32.17	10.64	29.42	312	352	A	V
		5854.4	50.95	-61.22	112.17	37.28	32.43	10.68	29.44	312	352	P	V
		5868.8	51.51	-55.42	106.93	37.82	32.43	10.71	29.45	312	352	P	V
		5897	50.88	-38.05	88.93	37.09	32.5	10.75	29.46	312	352	P	V
		5931.4	50.86	-17.44	68.3	36.95	32.63	10.75	29.47	312	352	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 165 5825MHz	*	5825	99.14	-	-	85.56	32.33	10.68	29.43	379	269	P	H
	*	5825	92.25	-	-	78.67	32.33	10.68	29.43	379	269	A	H
		5850.2	50.87	-70.87	121.74	37.23	32.4	10.68	29.44	379	269	P	H
		5856.8	51.55	-58.75	110.3	37.85	32.43	10.71	29.44	379	269	P	H
		5877.2	50.94	-52.63	103.57	37.21	32.47	10.71	29.45	379	269	P	H
		5932	50.57	-17.73	68.3	36.66	32.63	10.75	29.47	379	269	P	H
	*	5825	104.78	-	-	91.2	32.33	10.68	29.43	199	306	P	V
	*	5825	99.04	-	-	85.46	32.33	10.68	29.43	199	306	A	V
		5850	54.4	-67.8	122.2	40.76	32.4	10.68	29.44	199	306	P	V
		5855.6	53.31	-57.32	110.63	39.61	32.43	10.71	29.44	199	306	P	V
		5879	53.02	-49.22	102.24	39.29	32.47	10.71	29.45	199	306	P	V
		5946.8	50.77	-17.53	68.3	36.77	32.7	10.78	29.48	199	306	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11490	42.11	-31.89	74	39.53	40.07	15.12	52.61	164	301	P	H
VHT20		17235	48.66	-19.64	68.3	38.26	40.33	22.6	52.53	170	360	P	H
CH 149		11490	42.38	-31.62	74	39.8	40.07	15.12	52.61	159	24	P	V
5745MHz		17235	48.75	-19.55	68.3	38.35	40.33	22.6	52.53	174	328	P	V
802.11ac		11570	42.61	-31.39	74	40.16	39.9	15.18	52.63	150	360	P	H
VHT20		17352	50.66	-17.64	68.3	39.4	40.95	22.96	52.65	150	0	P	H
CH 157		11570	41.2	-32.8	74	38.75	39.9	15.18	52.63	116	32	P	V
5785MHz		17352	50.22	-18.08	68.3	38.96	40.95	22.96	52.65	174	234	P	V
802.11ac		11650	44.48	-29.52	74	42.3	39.6	15.24	52.66	164	67	P	H
VHT20		17475	49.07	-19.23	68.3	37.03	41.5	23.31	52.77	191	26	P	H
CH 165		11650	44.8	-29.2	74	42.62	39.6	15.24	52.66	131	18	P	V
5825MHz		17475	48.18	-20.12	68.3	36.14	41.5	23.31	52.77	157	301	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 151 5755MHz		5646.6	50.24	-18.06	68.3	37.29	31.73	10.58	29.36	201	330	P	H
		5697.8	51.71	-51.87	103.58	38.5	32	10.59	29.38	201	330	P	H
		5718.4	55	-55.35	110.35	41.71	32.07	10.61	29.39	201	330	P	H
		5723	55.41	-62.23	117.64	42.12	32.07	10.61	29.39	201	330	P	H
	*	5755	95.93	-	-	82.58	32.13	10.62	29.4	201	330	P	H
		5755	89.65	-	-	76.3	32.13	10.62	29.4	201	330	A	H
		5853.2	50.88	-64.02	114.9	37.24	32.4	10.68	29.44	201	330	P	H
		5864.4	50.64	-57.53	108.17	36.95	32.43	10.71	29.45	201	330	P	H
		5908.6	50.92	-29.45	80.37	37.06	32.57	10.75	29.46	201	330	P	H
		5941.6	50.58	-17.72	68.3	36.58	32.7	10.78	29.48	201	330	P	H
		5647.4	49.95	-18.35	68.3	37	31.73	10.58	29.36	230	12	P	V
		5693.4	54.85	-45.5	100.35	41.64	32	10.59	29.38	230	12	P	V
		5718.8	62.16	-48.3	110.46	48.87	32.07	10.61	29.39	230	12	P	V
		5722.6	63.07	-53.66	116.73	49.78	32.07	10.61	29.39	230	12	P	V
	*	5755	102.53	-	-	89.18	32.13	10.62	29.4	230	12	P	V
		5755	97.12	-	-	83.77	32.13	10.62	29.4	230	12	A	V
		5851.4	50.43	-68.58	119.01	36.79	32.4	10.68	29.44	230	12	P	V
		5858.8	50.89	-58.84	109.73	37.2	32.43	10.71	29.45	230	12	P	V
		5911.4	51.3	-27.01	78.31	37.45	32.57	10.75	29.47	230	12	P	V
		5946.6	50.63	-17.67	68.3	36.63	32.7	10.78	29.48	230	12	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 159 5795MHz		5622	49.4	-18.9	68.3	36.4	31.77	10.58	29.35	380	260	P	H
		5670.6	51.16	-32.38	83.54	38.09	31.85	10.59	29.37	380	260	P	H
		5717.6	50.34	-59.79	110.13	37.05	32.07	10.61	29.39	380	260	P	H
		5725	50.43	-71.77	122.2	37.14	32.07	10.61	29.39	380	260	P	H
	*	5795	94.89	-	-	81.47	32.2	10.64	29.42	380	260	P	H
		5795	88.71	-	-	75.29	32.2	10.64	29.42	380	260	A	H
		5854.4	49.95	-62.22	112.17	36.28	32.43	10.68	29.44	380	260	P	H
		5864.4	50.68	-57.49	108.17	36.99	32.43	10.71	29.45	380	260	P	H
		5887	51.71	-44.61	96.32	37.99	32.47	10.71	29.46	380	260	P	H
		5926	51.37	-16.93	68.3	37.46	32.63	10.75	29.47	380	260	P	H
		5605.6	50.04	-18.26	68.3	37.03	31.8	10.56	29.35	199	3	P	V
		5680.8	51.08	-39.99	91.07	38.02	31.85	10.59	29.38	199	3	P	V
		5716	51.26	-58.42	109.68	38.01	32.03	10.61	29.39	199	3	P	V
		5722.4	50.91	-65.36	116.27	37.62	32.07	10.61	29.39	199	3	P	V
	*	5795	102.82	-	-	89.4	32.2	10.64	29.42	199	3	P	V
		5795	96.6	-	-	83.18	32.2	10.64	29.42	199	3	A	V
		5852.8	53.18	-62.64	115.82	39.54	32.4	10.68	29.44	199	3	P	V
		5855.8	53.61	-56.97	110.58	39.91	32.43	10.71	29.44	199	3	P	V
		5911.4	51.87	-26.44	78.31	38.02	32.57	10.75	29.47	199	3	P	V
		5927	50.47	-17.83	68.3	36.56	32.63	10.75	29.47	199	3	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11510	39.8	-34.2	74	37.18	40.1	15.12	52.6	176	186	P	H
VHT40		17265	45.72	-22.58	68.3	35.1	40.47	22.72	52.57	189	163	P	H
CH 151		11510	42.75	-31.25	74	40.13	40.1	15.12	52.6	176	186	P	V
5755MHz		17265	50.38	-17.92	68.3	39.76	40.47	22.72	52.57	189	163	P	V
802.11ac		11590	43.18	-30.82	74	40.75	39.85	15.21	52.63	164	181	P	H
VHT40		17385	50.24	-18.06	68.3	38.66	41.18	23.08	52.68	132	284	P	H
CH 159		11590	43.56	-30.44	74	41.13	39.85	15.21	52.63	170	300	P	V
5795MHz		17385	50.54	-17.76	68.3	38.96	41.18	23.08	52.68	150	200	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5636.8	50.18	-18.12	68.3	37.23	31.73	10.58	29.36	331	270	P	H
		5698.8	58.36	-45.96	104.32	45.15	32	10.59	29.38	331	270	P	H
		5716	61.75	-47.93	109.68	48.5	32.03	10.61	29.39	331	270	P	H
		5720.2	59	-52.26	111.26	45.71	32.07	10.61	29.39	331	270	P	H
	*	5775	92.43	-	-	79.05	32.17	10.62	29.41	331	270	P	H
		5775	86.56	-	-	73.18	32.17	10.62	29.41	331	270	A	H
		5852	58.85	-58.79	117.64	45.21	32.4	10.68	29.44	331	270	P	H
		5868.2	56.38	-50.72	107.1	42.69	32.43	10.71	29.45	331	270	P	H
		5875.6	53.02	-51.74	104.76	39.29	32.47	10.71	29.45	331	270	P	H
		5931.4	51.58	-16.72	68.3	37.67	32.63	10.75	29.47	331	270	P	H
		5625.4	50.64	-17.66	68.3	37.64	31.77	10.58	29.35	201	1	P	V
		5692	65.73	-33.59	99.32	52.52	32	10.59	29.38	201	1	P	V
		5719.4	70.37	-40.26	110.63	57.08	32.07	10.61	29.39	201	1	P	V
		5725	68.52	-53.68	122.2	55.23	32.07	10.61	29.39	201	1	P	V
	*	5775	99.5	-	-	86.12	32.17	10.62	29.41	201	1	P	V
		5775	93.04	-	-	79.66	32.17	10.62	29.41	201	1	A	V
		5850.4	62.75	-58.54	121.29	49.11	32.4	10.68	29.44	201	1	P	V
		5855.4	63.64	-47.05	110.69	49.97	32.43	10.68	29.44	201	1	P	V
		5875.6	57.44	-47.32	104.76	43.71	32.47	10.71	29.45	201	1	P	V
		5932.4	50.47	-17.83	68.3	36.56	32.63	10.75	29.47	201	1	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11550	43.97	-30.03	74	41.46	39.95	15.18	52.62	160	360	P	H
VHT80		17325	49.58	-18.72	68.3	38.52	40.72	22.96	52.62	170	360	P	H
CH 155		11550	43.48	-30.52	74	40.97	39.95	15.18	52.62	134	247	P	V
5775MHz		17325	49.7	-18.6	68.3	38.64	40.72	22.96	52.62	175	34	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11a LF		30.97	22.86	-17.14	40	29.26	24.33	0.57	31.3	165	113	P	H
		80.44	21.15	-18.85	40	38.42	13.4	0.93	31.6	-	-	P	H
		133.79	21.13	-22.37	43.5	33.92	17.47	1.2	31.46	-	-	P	H
		267.65	24.36	-21.64	46	34.36	19.87	1.72	31.59	-	-	P	H
		401.51	24.71	-21.29	46	32.14	21.84	2.13	31.4	-	-	P	H
		753.62	27.58	-18.42	46	28.05	27.66	2.99	31.12	-	-	P	H
		30	22.77	-17.23	40	28.71	24.8	0.56	31.3	134	238	P	V
		81.41	21.78	-18.22	40	38.9	13.54	0.94	31.6	-	-	P	V
		134.76	20.5	-23	43.5	33.27	17.48	1.21	31.46	-	-	P	V
		247.28	22.83	-23.17	46	34.26	18.6	1.65	31.68	-	-	P	V
		522.76	27.11	-18.89	46	31.58	24.32	2.46	31.25	-	-	P	V
		902.03	28.76	-17.24	46	27.9	29.03	3.32	31.49	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.


Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.28	–	–	10Hz
802.11ac VHT20	98.16	–	–	10Hz
802.11ac VHT40	95.91	0.9522	1.0502	3kHz
802.11ac VHT80	93.04	0.4652	2.1495	3kHz


802.11a

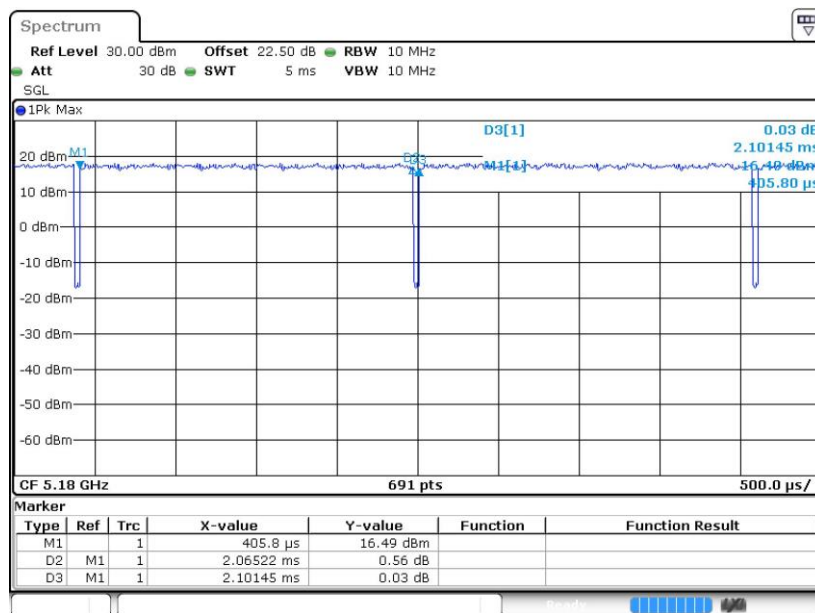

802.11ac VHT20

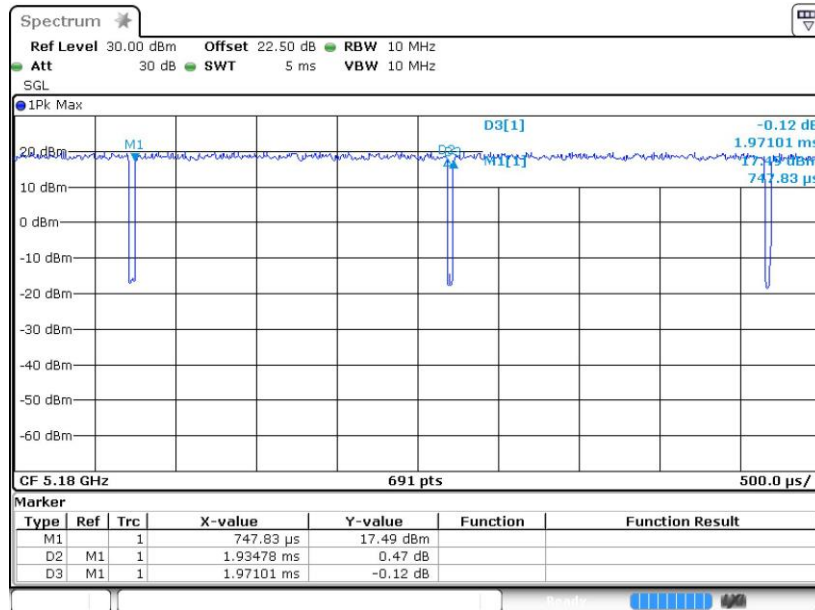

802.11ac VHT40

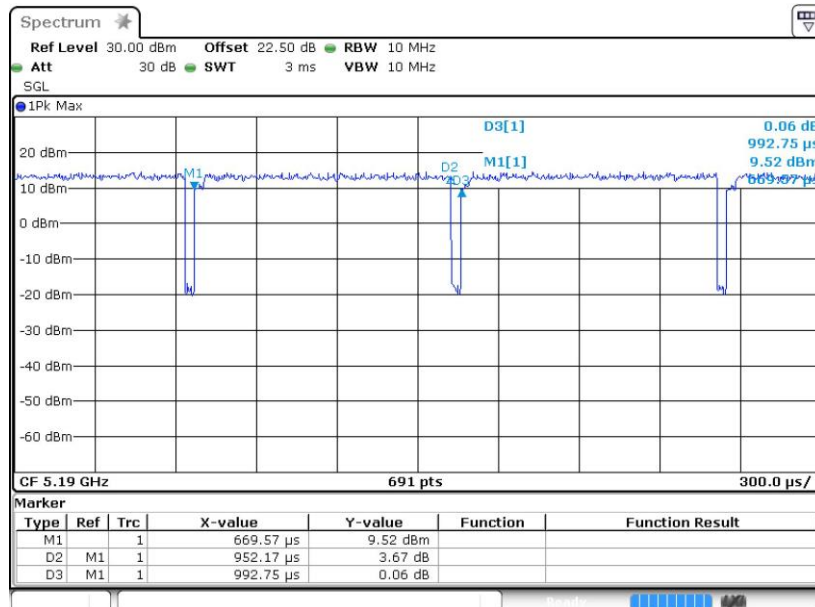



802.11ac VHT80

