

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/6/15

System Check_13MHz

DUT: CLA-13-SN:1023

Communication System: UID 0, CW (0); Frequency: 13 MHz; Duty Cycle: 1:1

Medium: HSL_13 Medium parameters used: $f = 13 \text{ MHz}$; $\sigma = 0.76 \text{ S/m}$; $\epsilon_r = 56.337$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(16.39, 13.97, 15.19); Calibrated: 2024/8/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1664; Calibrated: 2024/7/10
- Phantom: ELI v5.0(Right); Type: QDOVA001BB; Serial: 1225
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250mW/Area Scan (141x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.224 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.82 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 15.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 0.223 W/kg

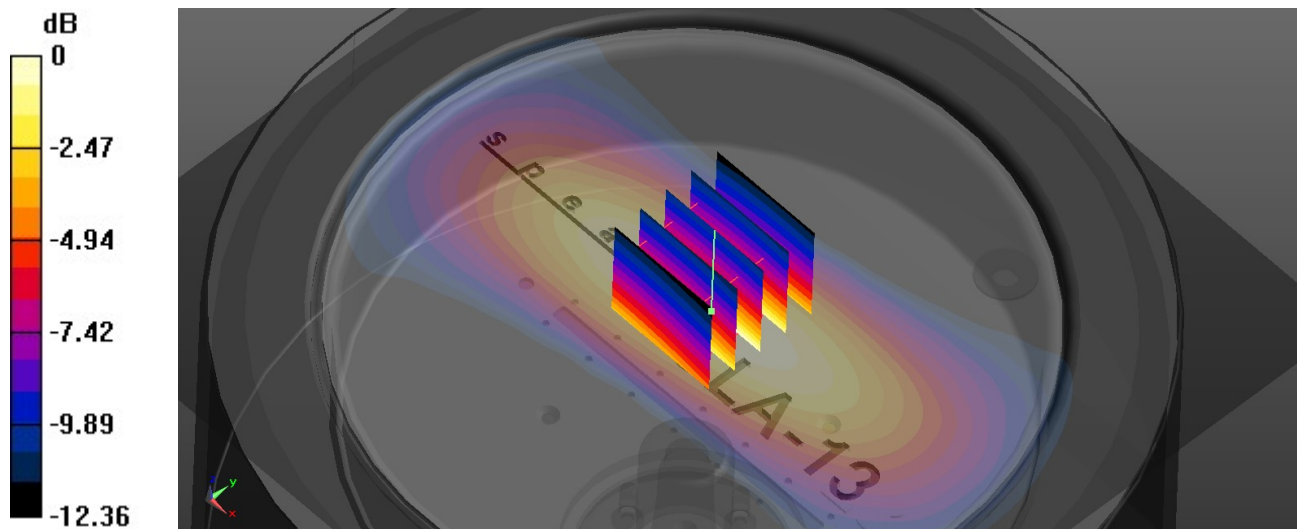

0 dB = 0.223 W/kg = -7.13 dBW/kg