



FCC RF Test Report

APPLICANT : Guangdong OPPO Mobile
Telecommunications Corp., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : OPPO
MODEL NAME : CPH2695
FCC ID : R9C-OP24253
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Sep. 30, 2024 ~ Nov. 14, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	29
3.6 AC Conducted Emission Measurement.....	33
3.7 Antenna Requirements.....	35
4 LIST OF MEASURING EQUIPMENT	36
5 MEASUREMENT UNCERTAINTY	37
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR491912C	Rev. 01	Initial issue of report	Nov. 26, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 30\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.15 dB at 4874.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.09 dB at 13.560 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City, Guangdong Province, P.R. China

1.2 Manufacturer

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City, Guangdong Province, P.R. China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	OPPO
Model Name	CPH2695
FCC ID	R9C-OP24253
IMEI Code	Conducted: 866444070022614/866444070022606 Conduction: 866444070020972/866444070020964 Radiation: 866444070020253/866444070020246
HW Version	11
SW Version	ColorOS 15.0
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum Average Conducted Power to antenna	802.11b : 15.10 dBm (0.0324 W) 802.11g : 16.10 dBm (0.0407 W) 802.11n HT20 : 16.20 dBm (0.0417 W) 802.11n HT40 : 15.20 dBm (0.0331 W)
99% Occupied Bandwidth	802.11b : 12.77MHz 802.11g : 16.77MHz 802.11n HT20 : 17.81MHz 802.11n HT40 : 36.50MHz
Antenna Type / Gain	IFA Antenna Type with gain 0.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11n HT20/ HT40 by referring to their higher power setting.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-


2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20 (Cover VHT20)	MCS0
802.11n HT40 (Cover VHT40)	MCS0

Test Cases	
AC Conducted Emission	Mode 1 GSM 850 Idle + WLAN Link(2.4G) + USB Cable (Charging from Adapter1) + Battery 1 + NFC TX
Remark: For Radiated Test Cases, The tests were performance with Adapter 1, Battery 1, USB Cable	

2.3 Connection Diagram of Test System

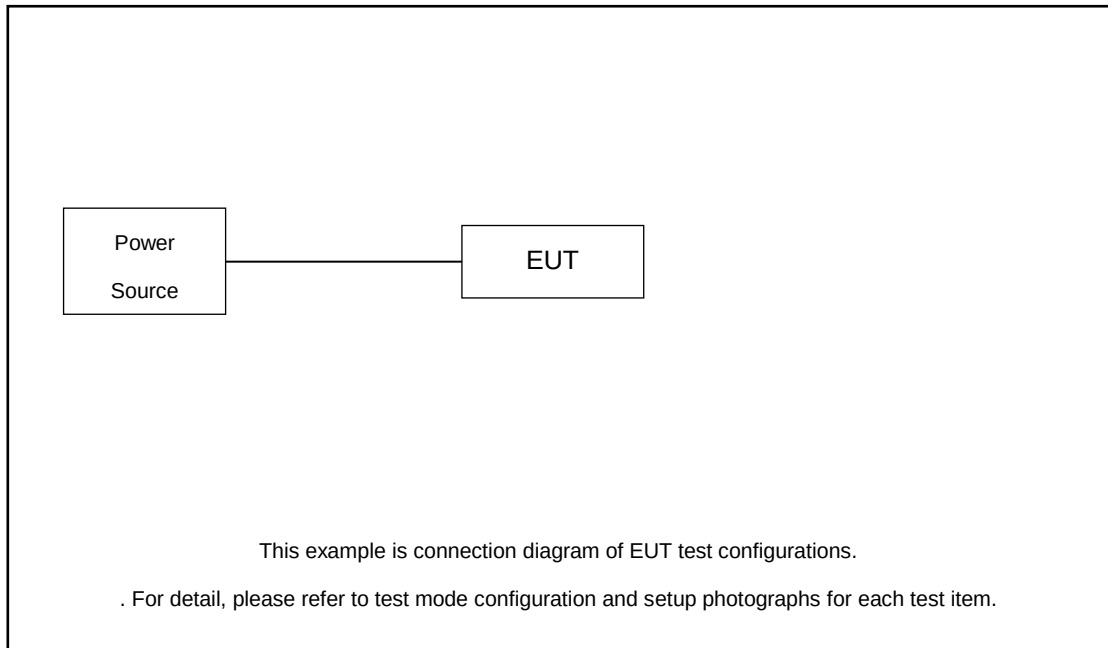

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	BT Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8m
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
4.	NOTE BOOK	Lenovo	E540	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
5.	NFC Card	N/A	N/A	N/A	N/A	N/A
6.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.3 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.3 + 10 = 11.3 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

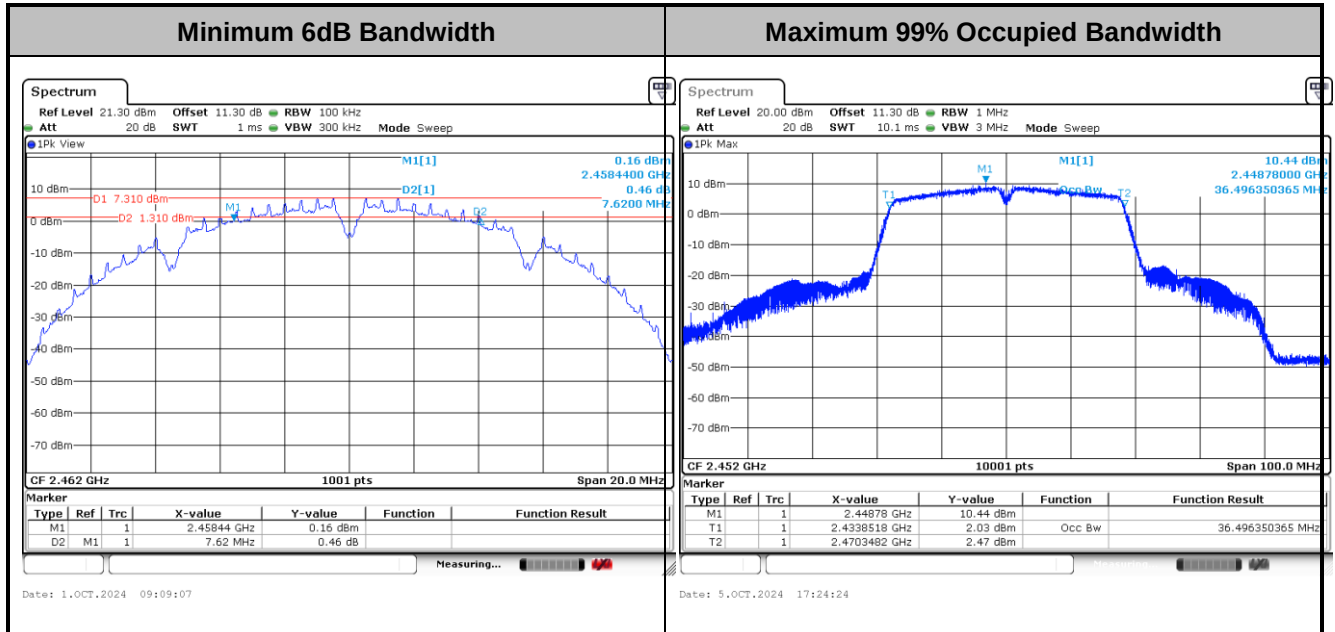

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

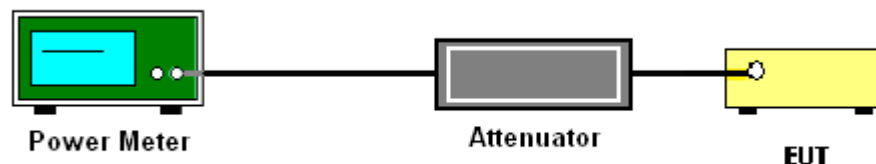

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

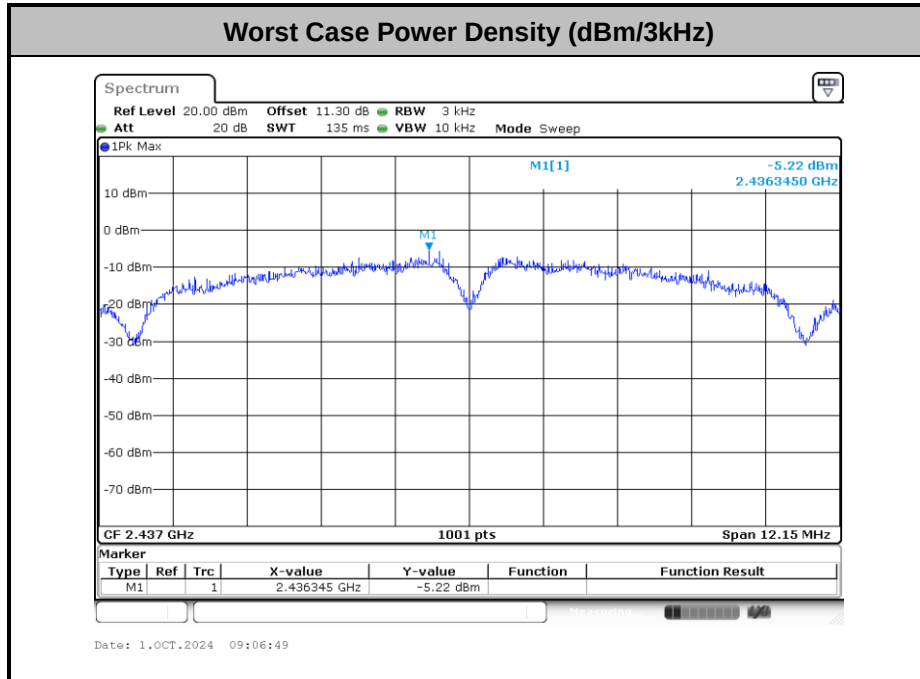

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	Xiaobin Han	Temperature :	24~26°C
		Relative Humidity :	50~53%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

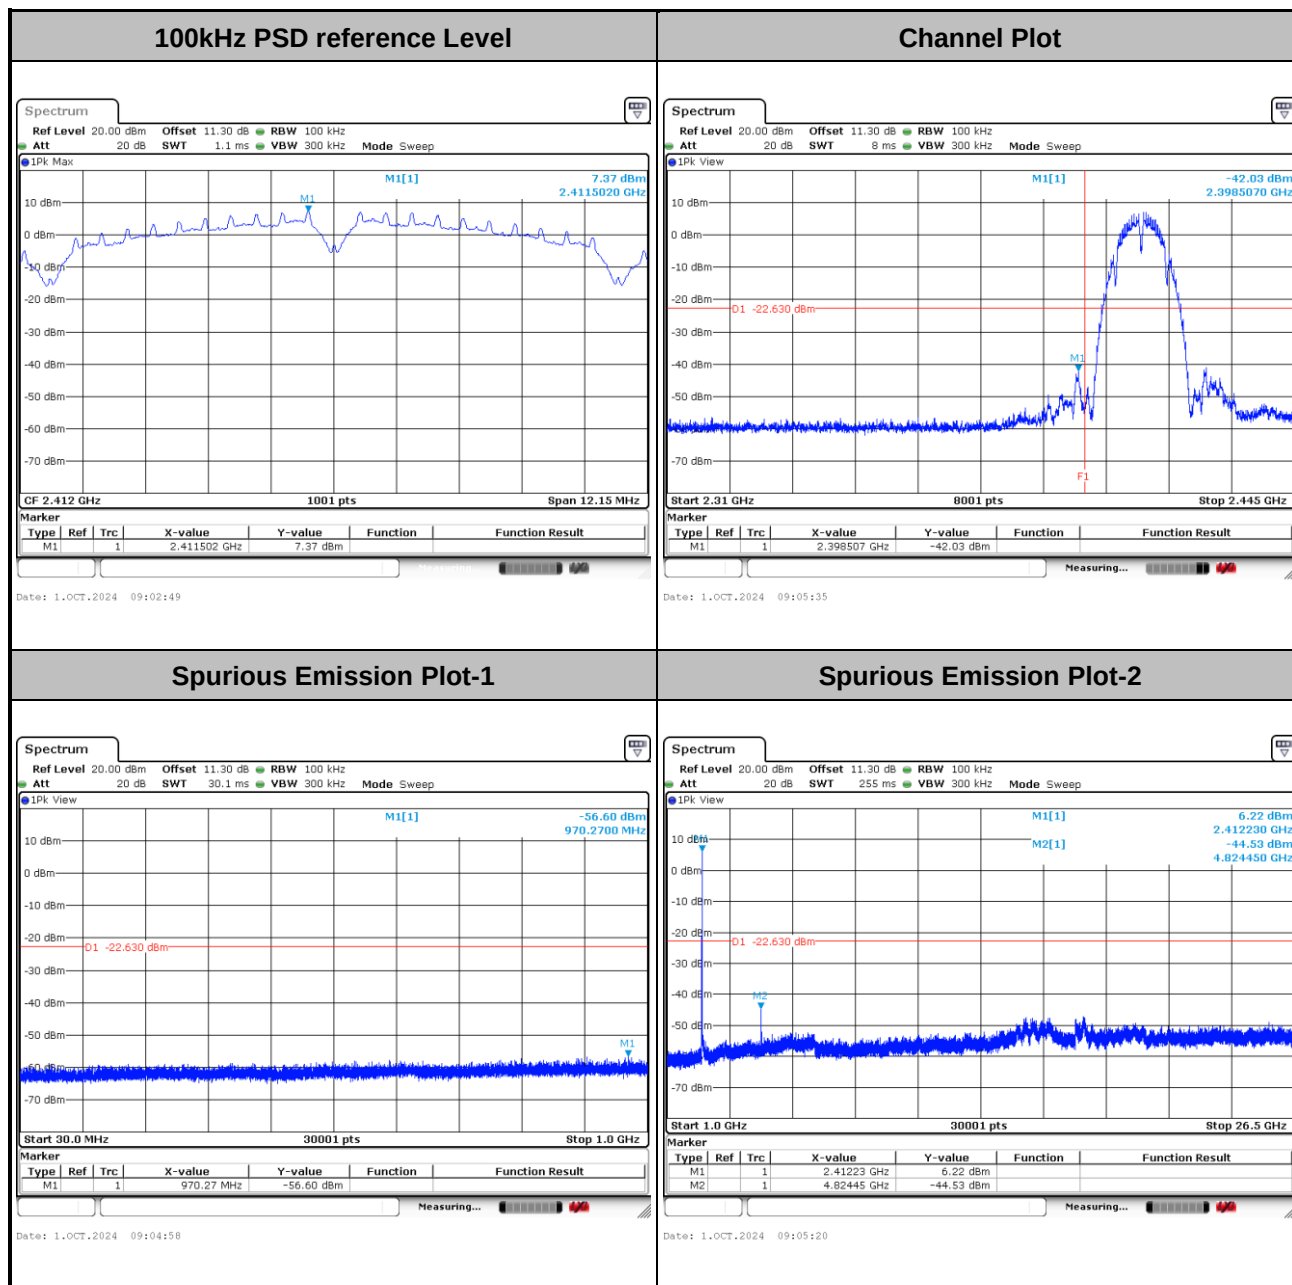




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

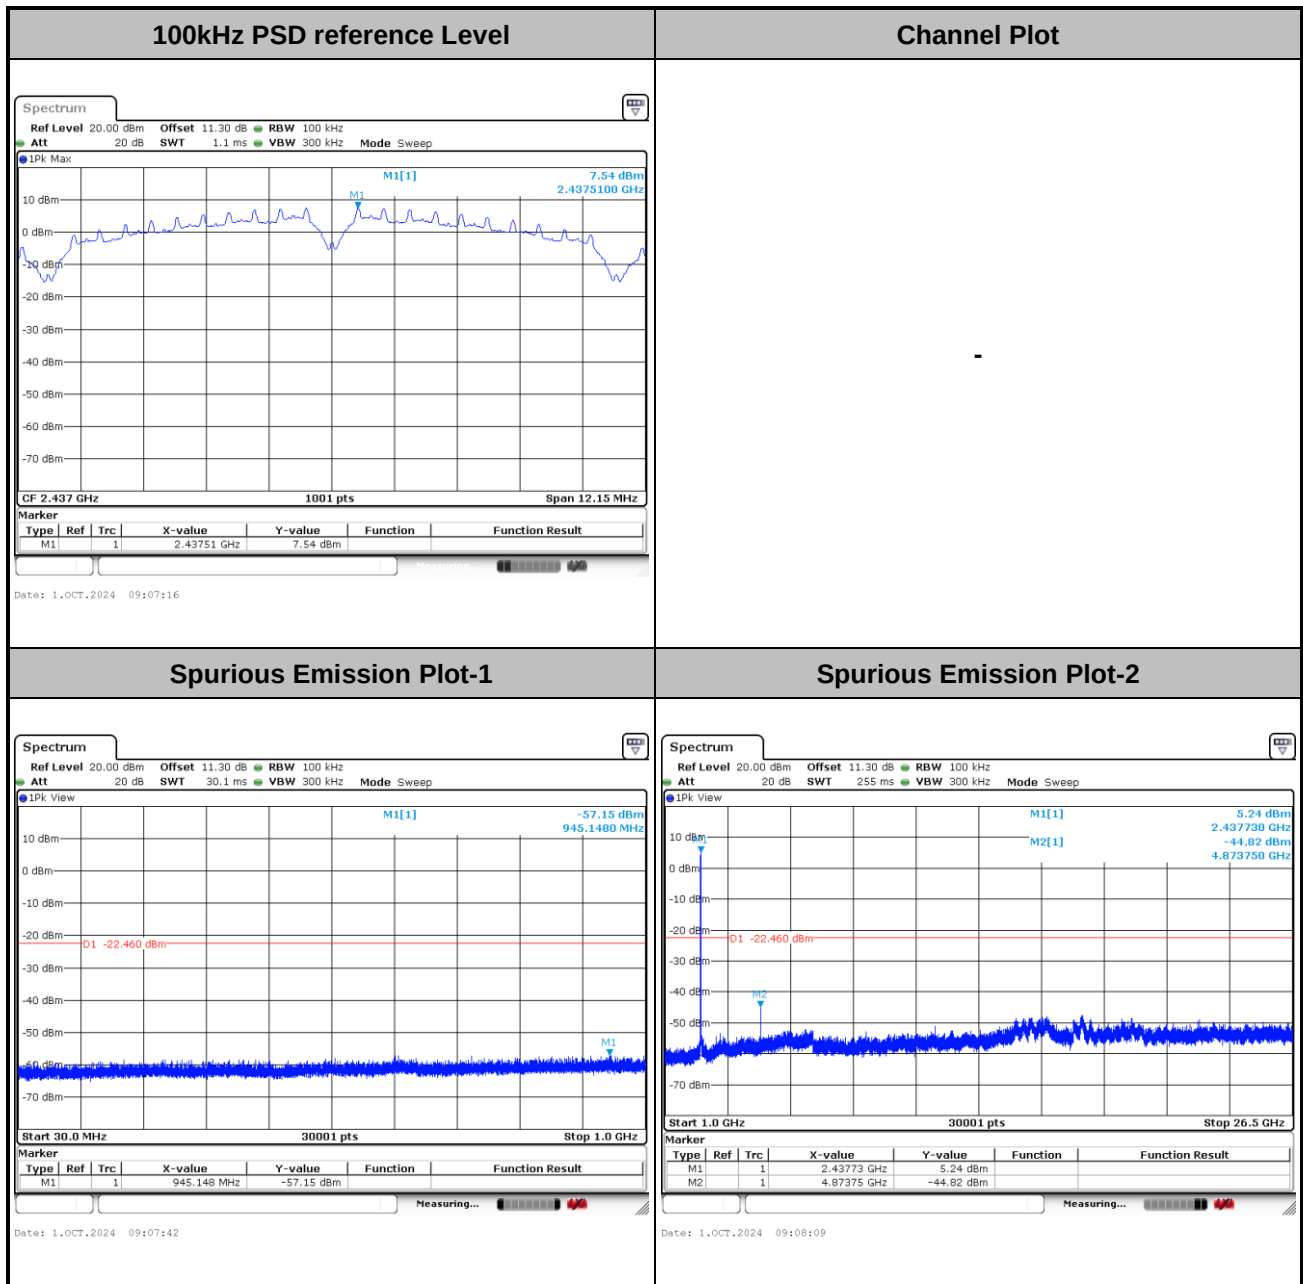




Test Mode : 802.11b Test Channel : 11


100kHz PSD reference Level

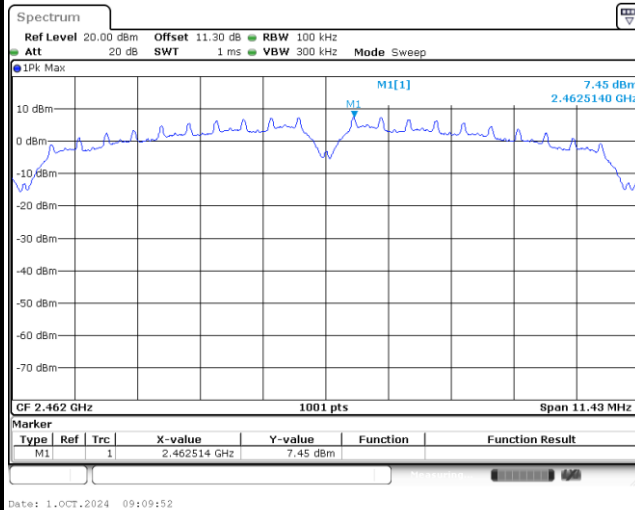


Channel Plot

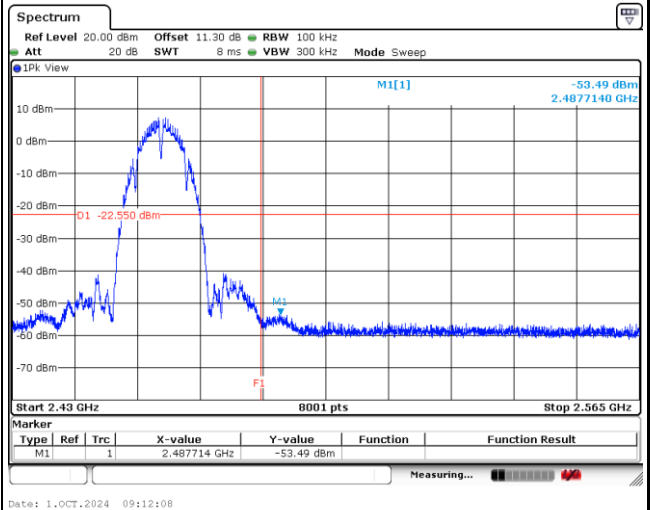

Spurious Emission Plot-1

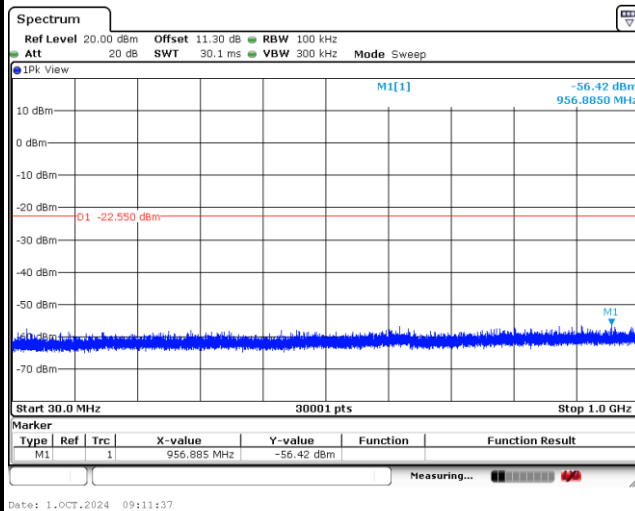


Spurious Emission Plot-2

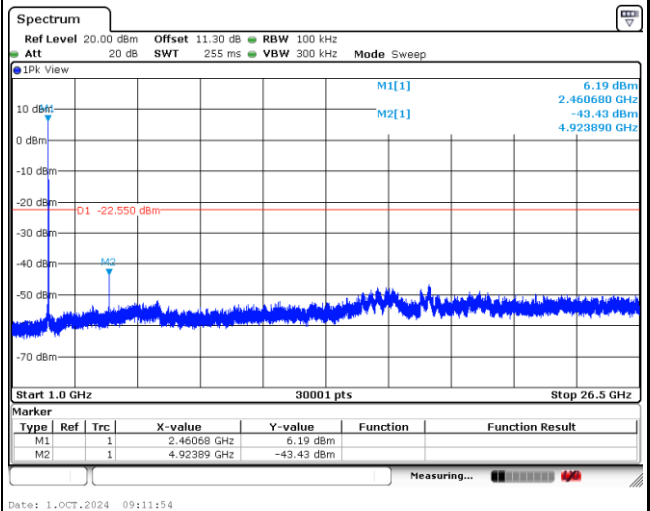




Test Mode : 802.11g Test Channel : 01


100kHz PSD reference Level

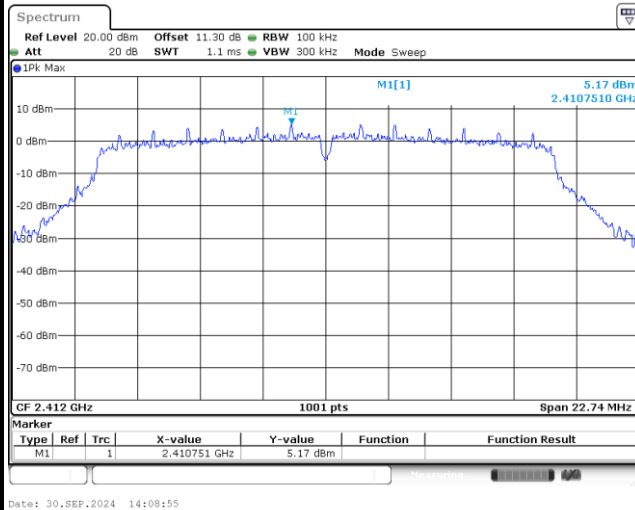


Channel Plot

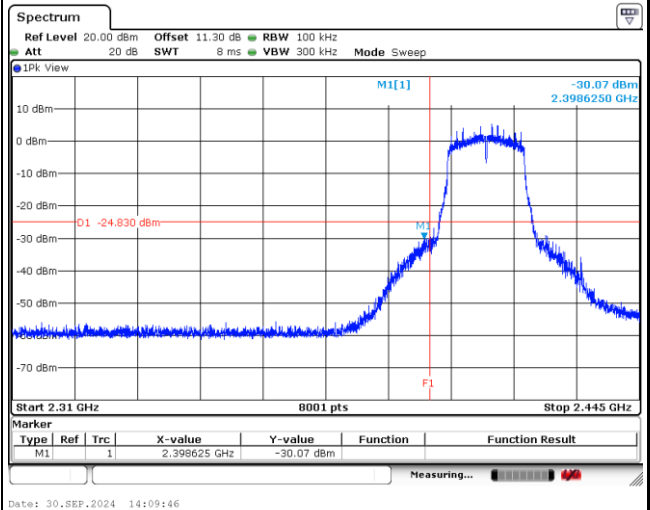

Spurious Emission Plot-1

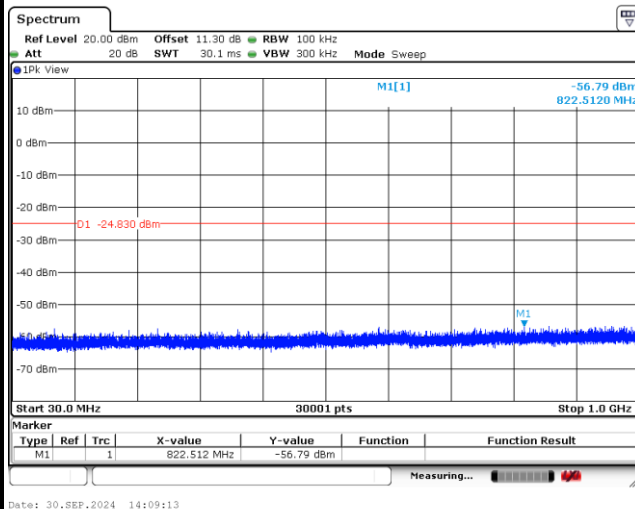


Spurious Emission Plot-2

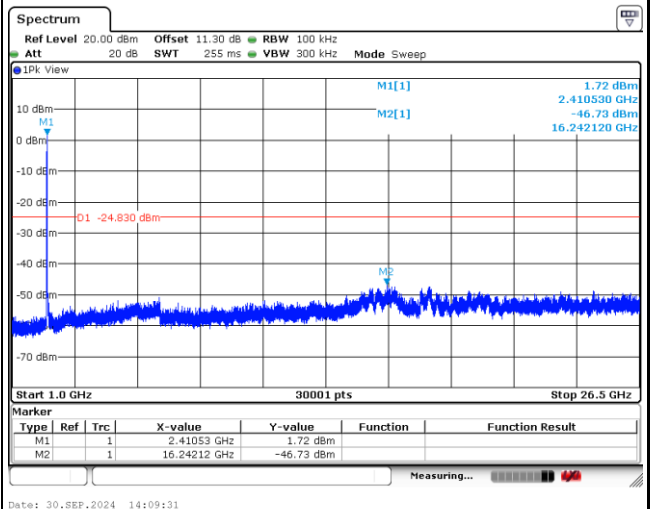




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

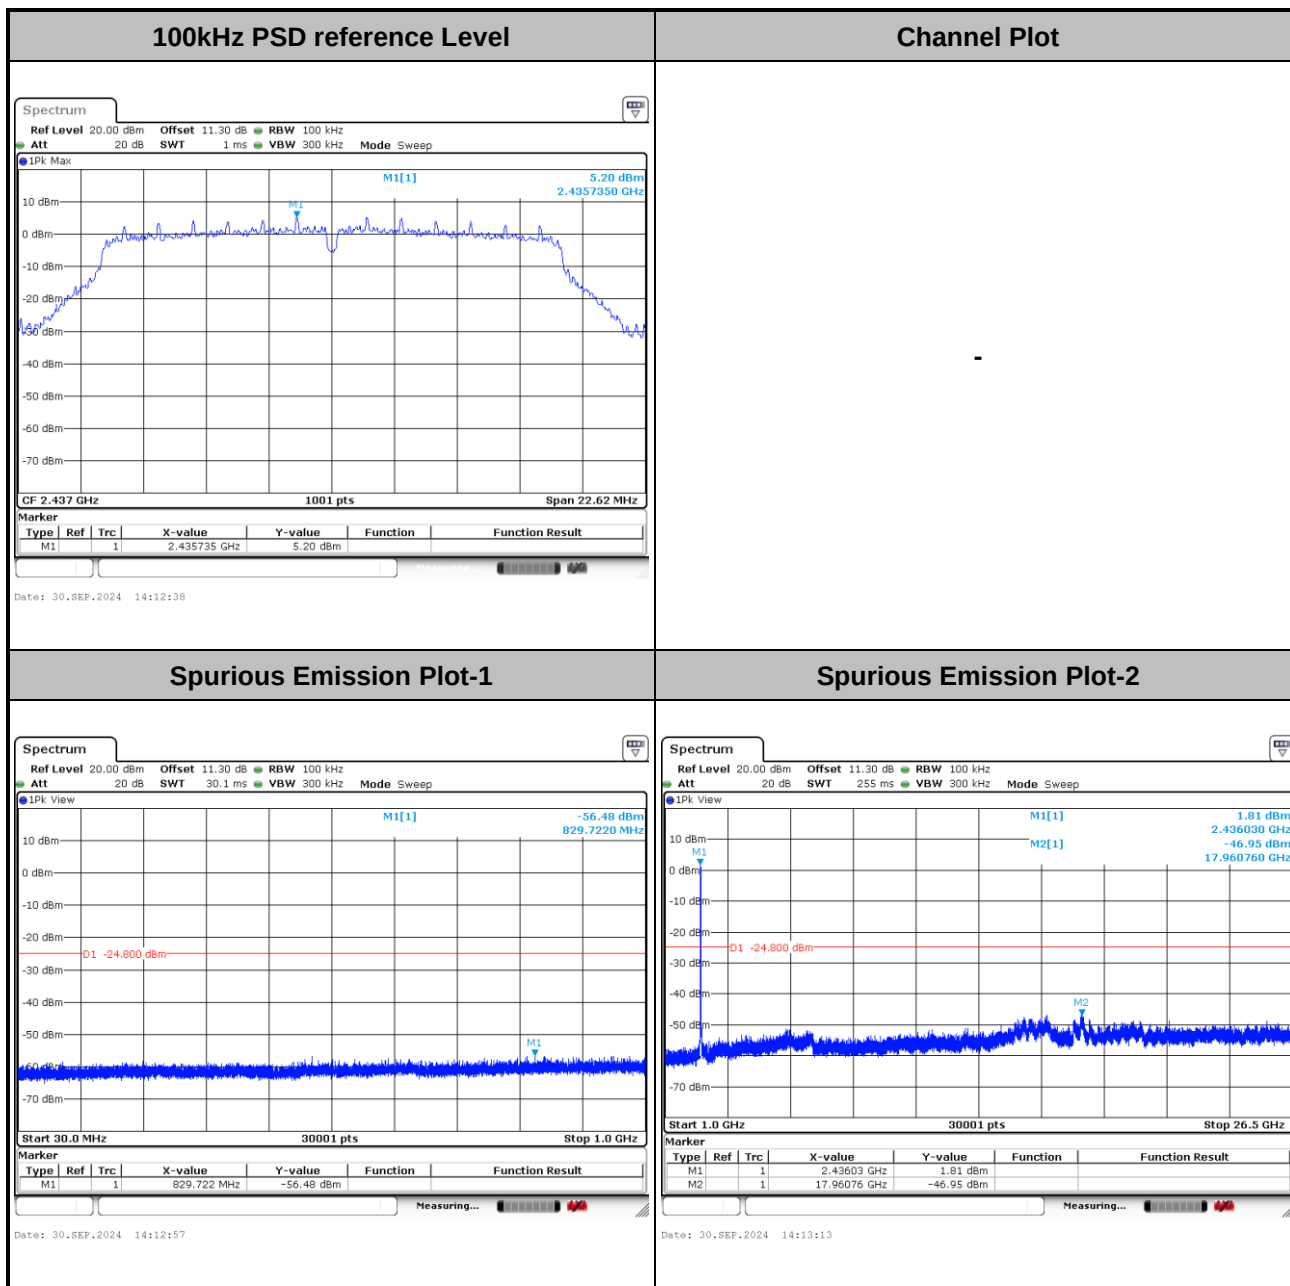




Test Mode : 802.11g Test Channel : 11


100kHz PSD reference Level

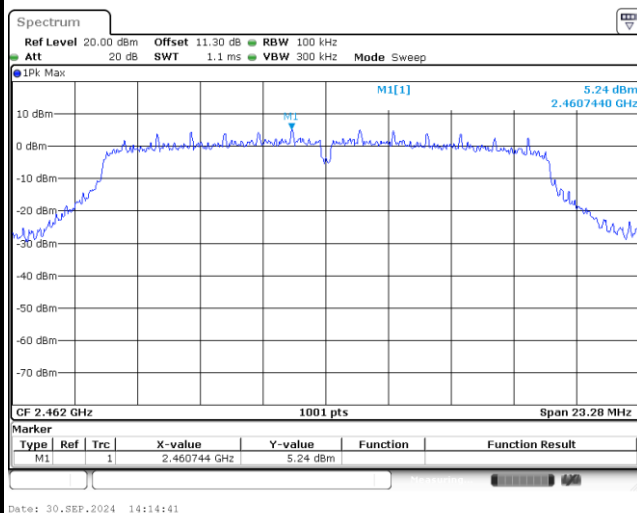


Channel Plot

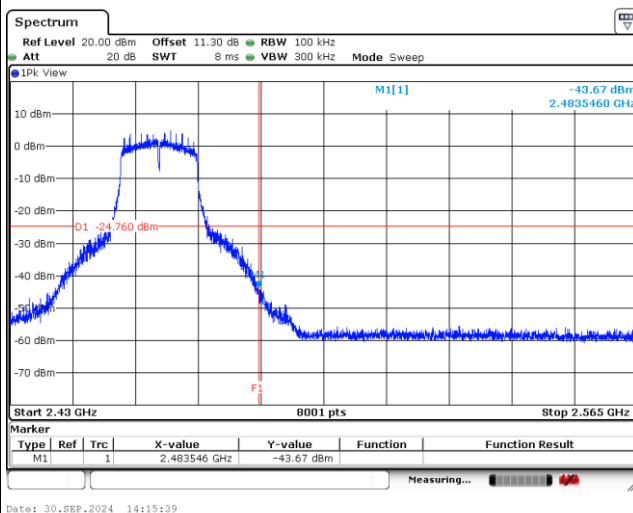

Spurious Emission Plot-1

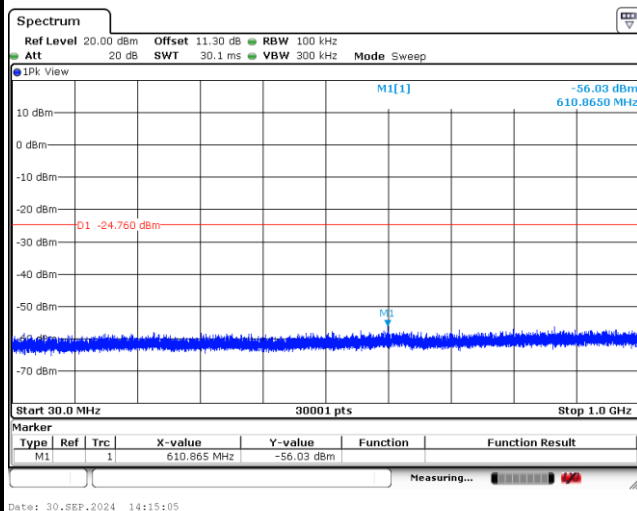


Spurious Emission Plot-2

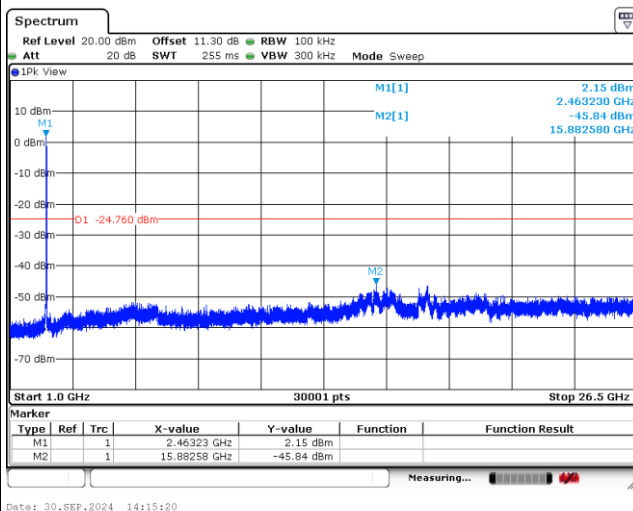




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

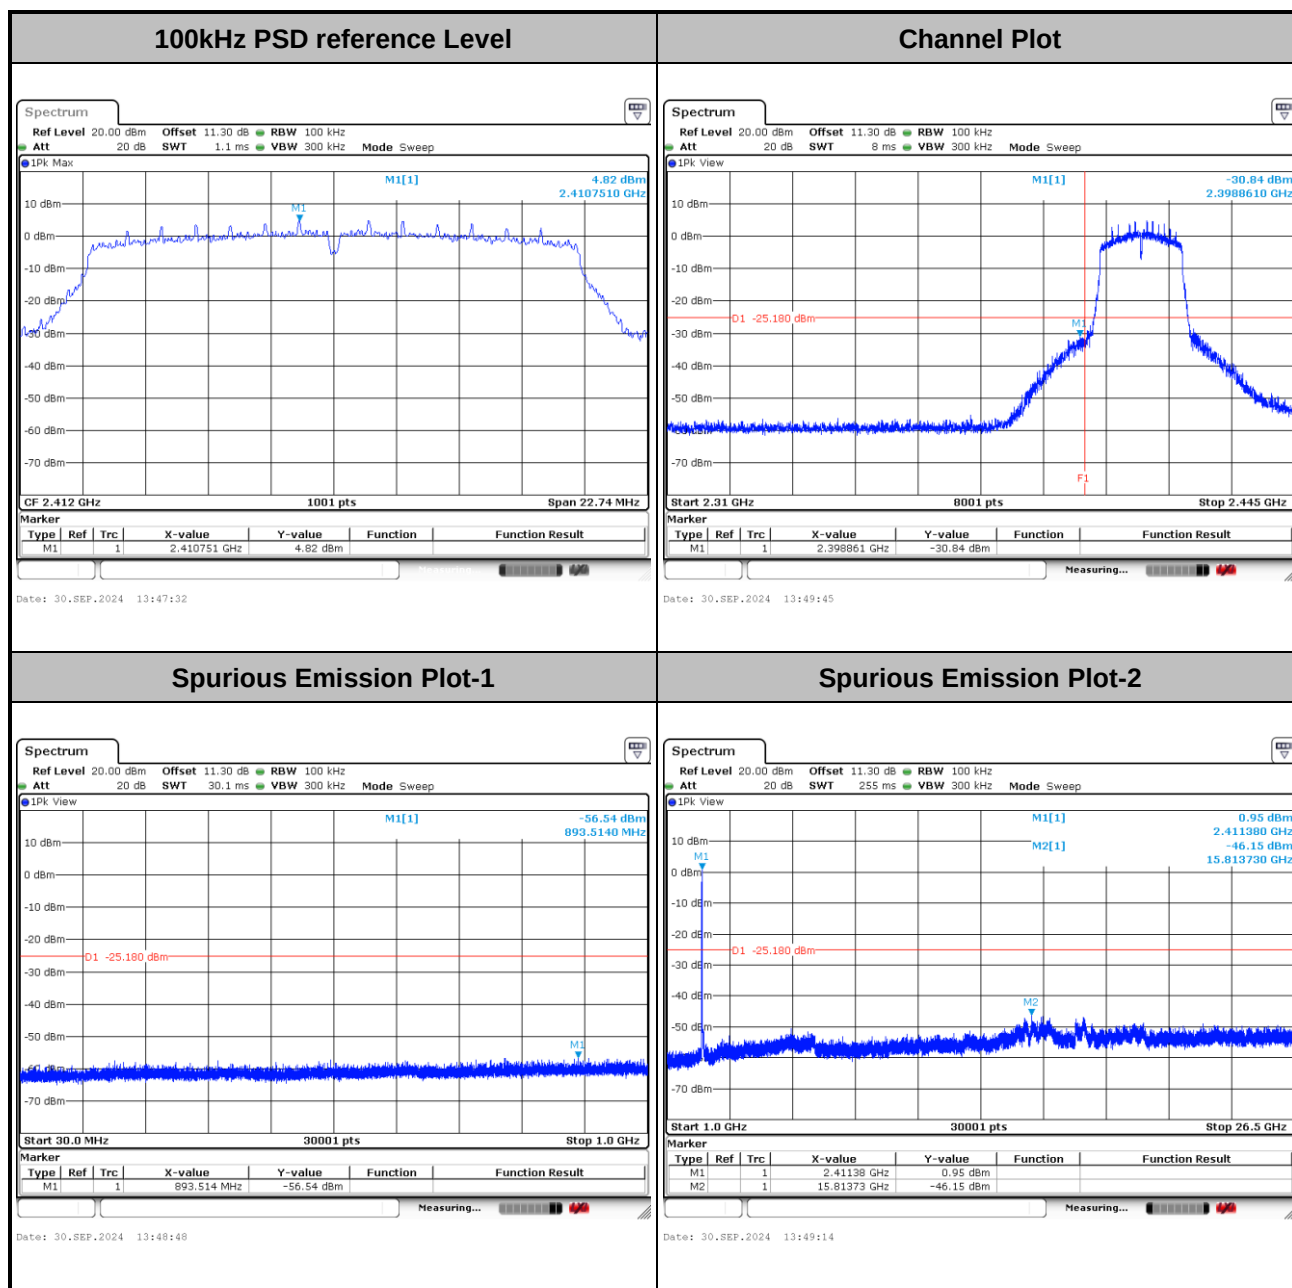



Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

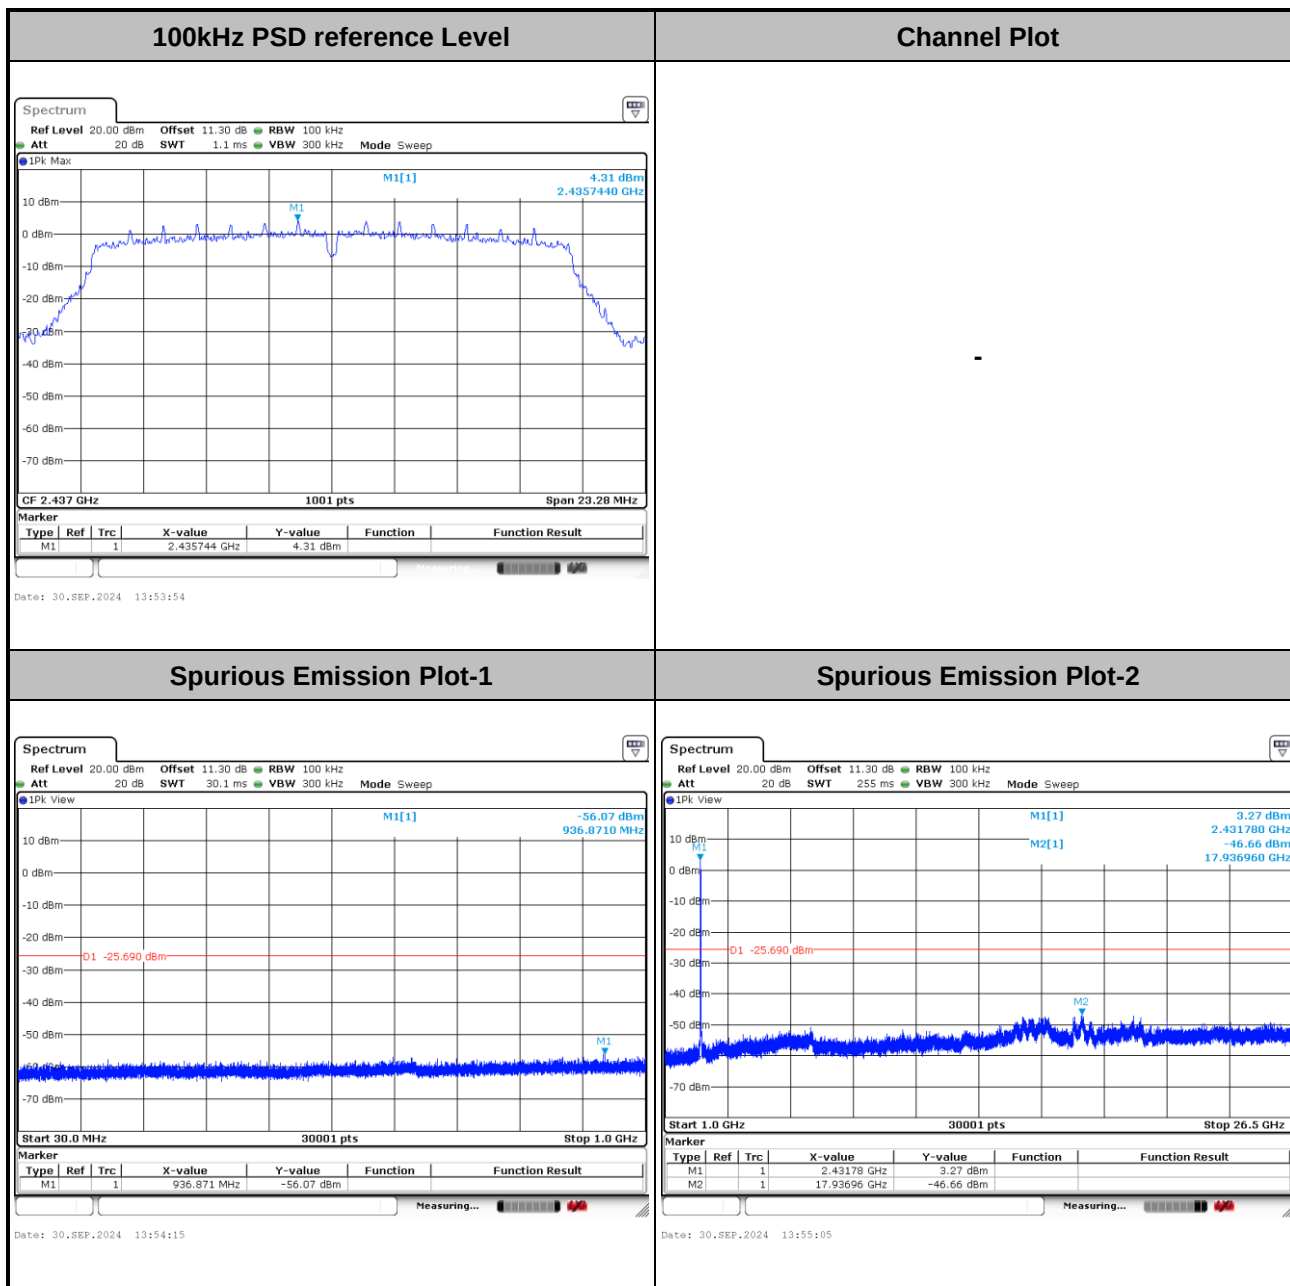





Test Mode : 802.11n HT20

Test Channel : 11


100kHz PSD reference Level

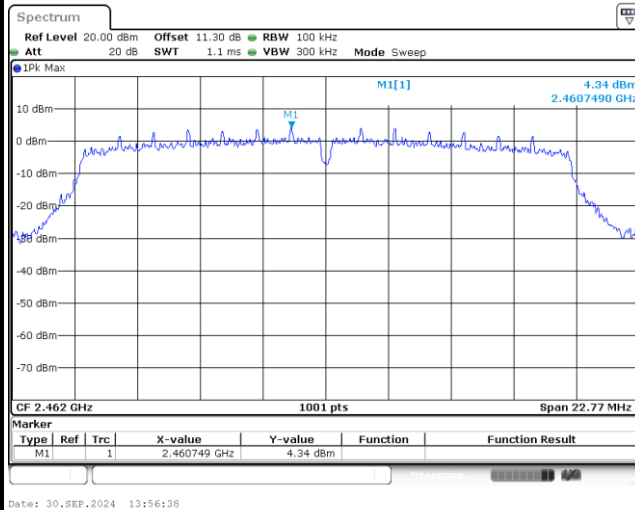


Channel Plot

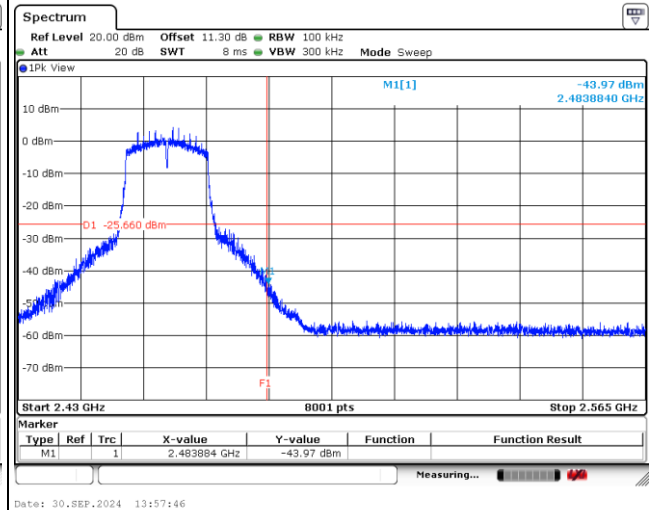

Spurious Emission Plot-1

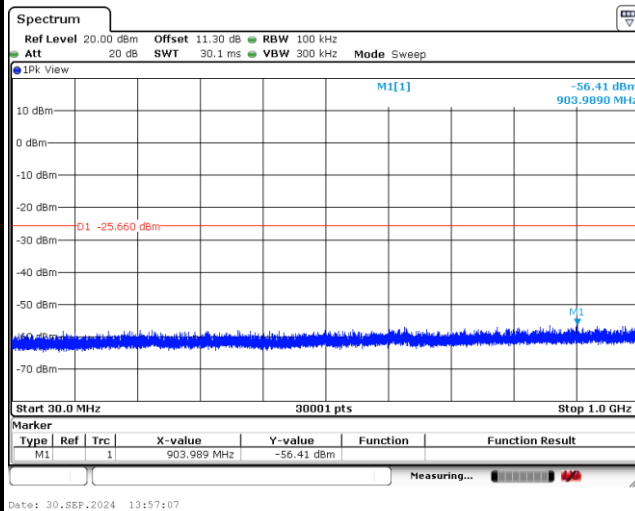

Spurious Emission Plot-2

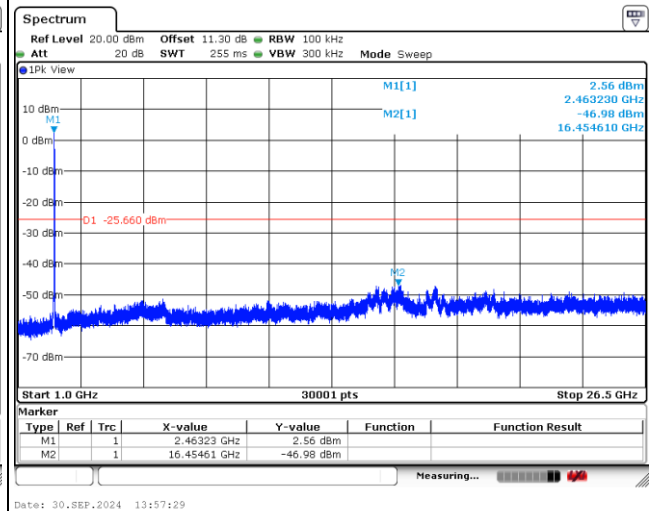





Test Mode : 802.11n HT40

Test Channel : 03


100kHz PSD reference Level

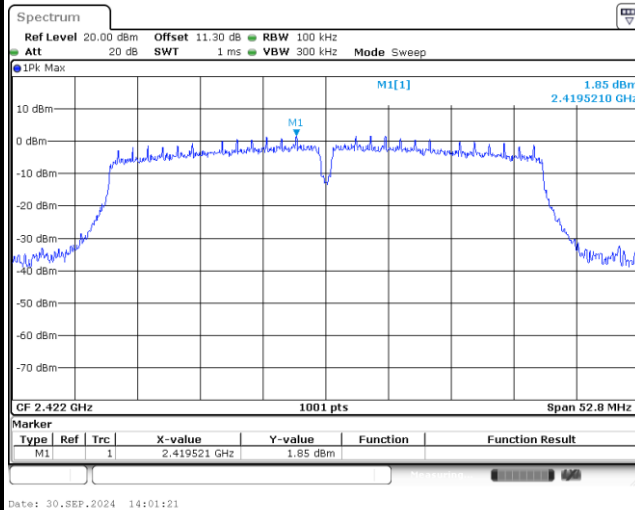


Channel Plot

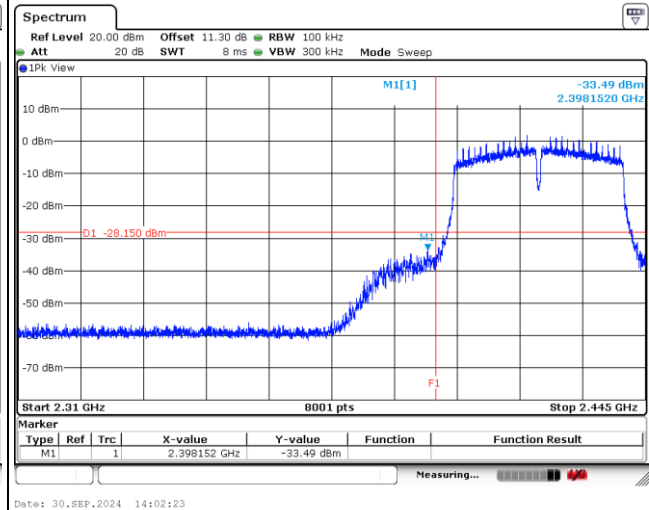

Spurious Emission Plot-1

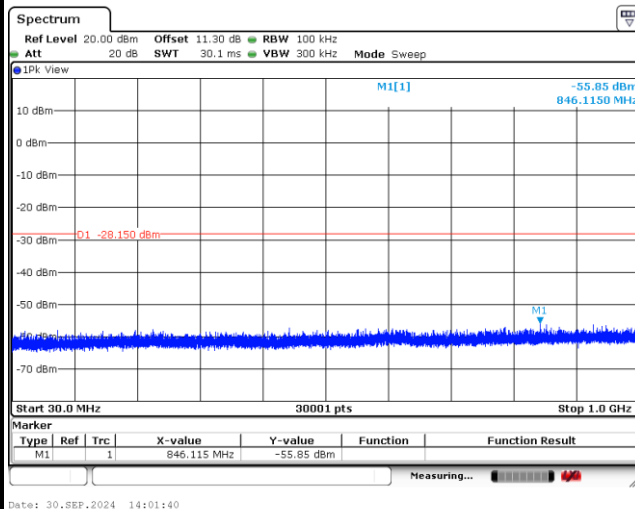

Spurious Emission Plot-2

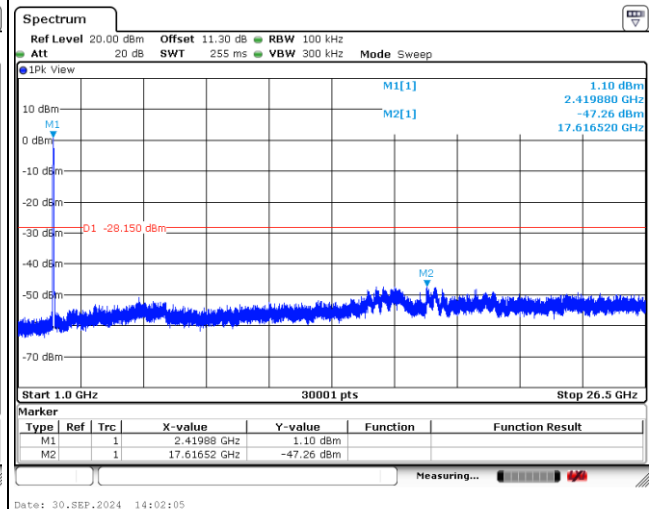




Test Mode : 802.11n HT40


Test Channel : 06

100kHz PSD reference Level

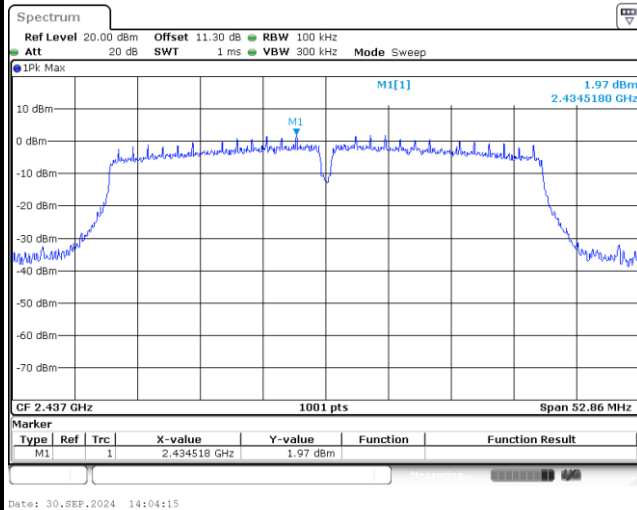


Channel Plot

Spurious Emission Plot-1

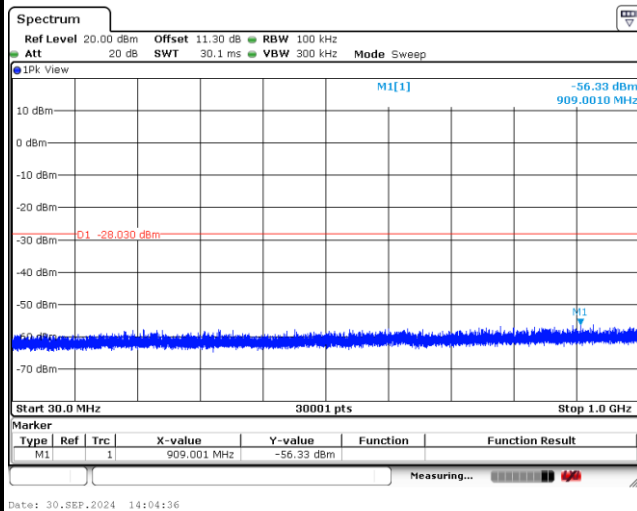

Spurious Emission Plot-2

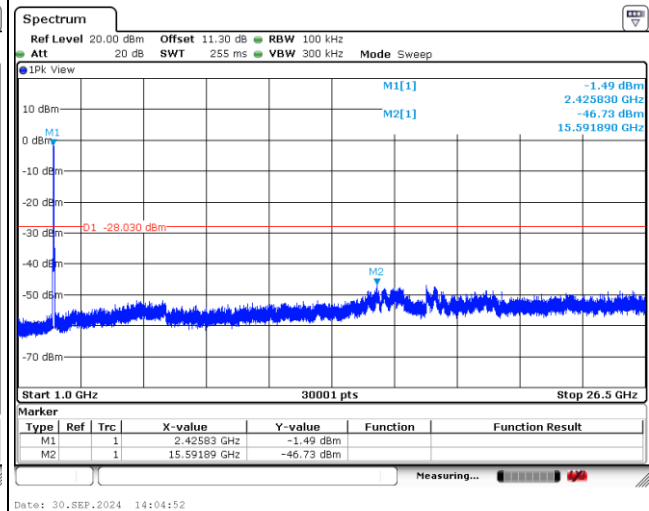





Test Mode : 802.11n HT40

Test Channel : 09


100kHz PSD reference Level

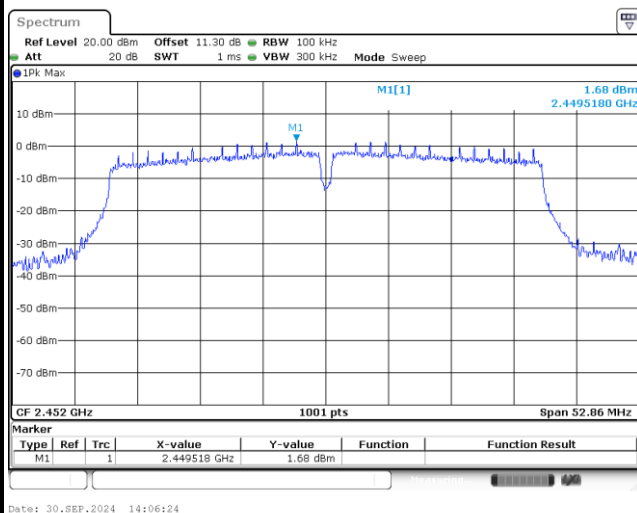


Channel Plot

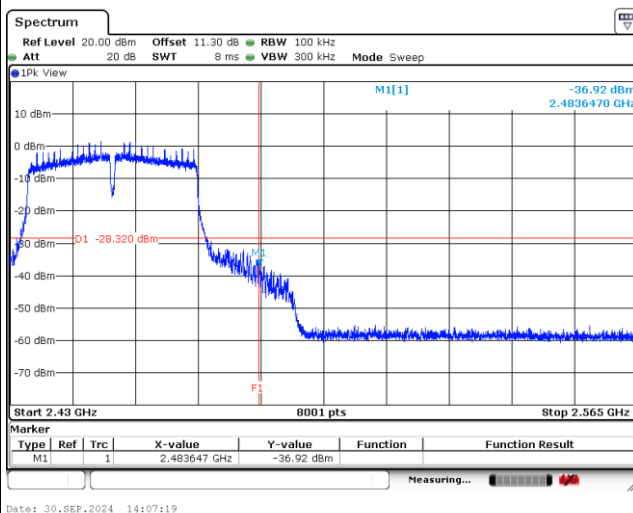

Spurious Emission Plot-1

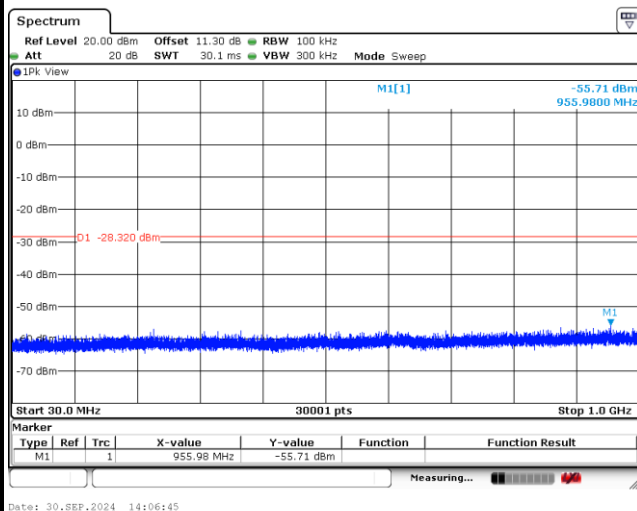

Spurious Emission Plot-2

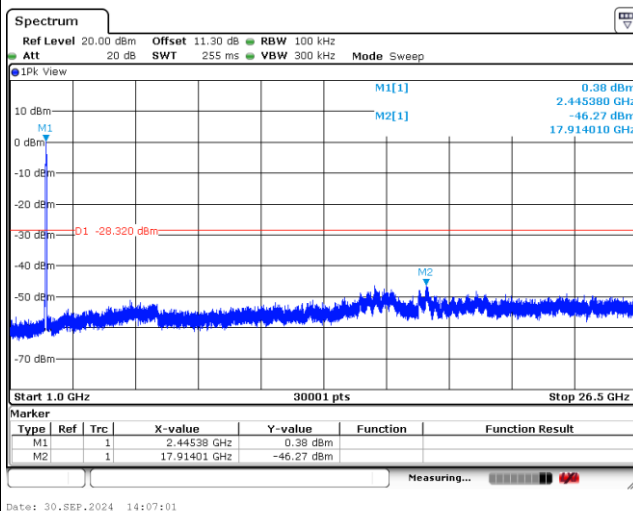



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

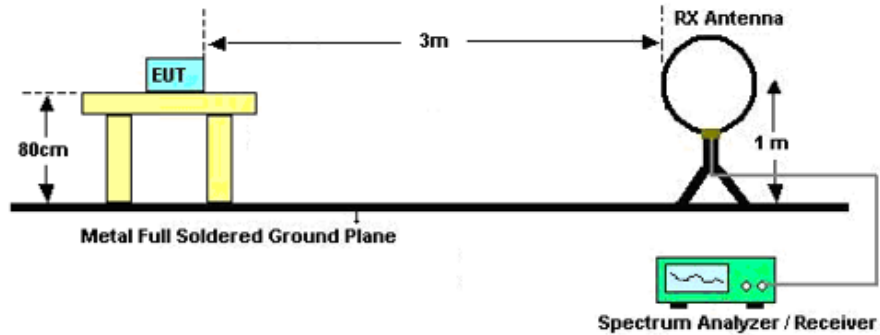

For radiated emissions from 30MHz to 1GHz

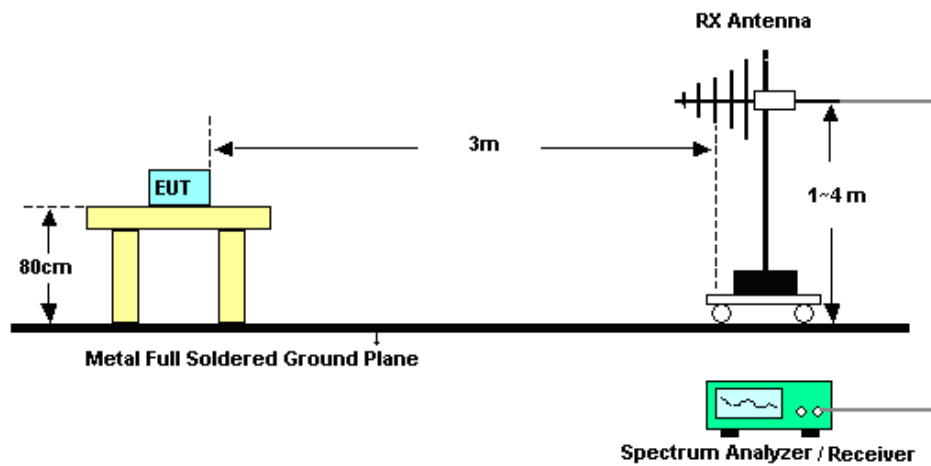

For radiated emissions above 1GHz

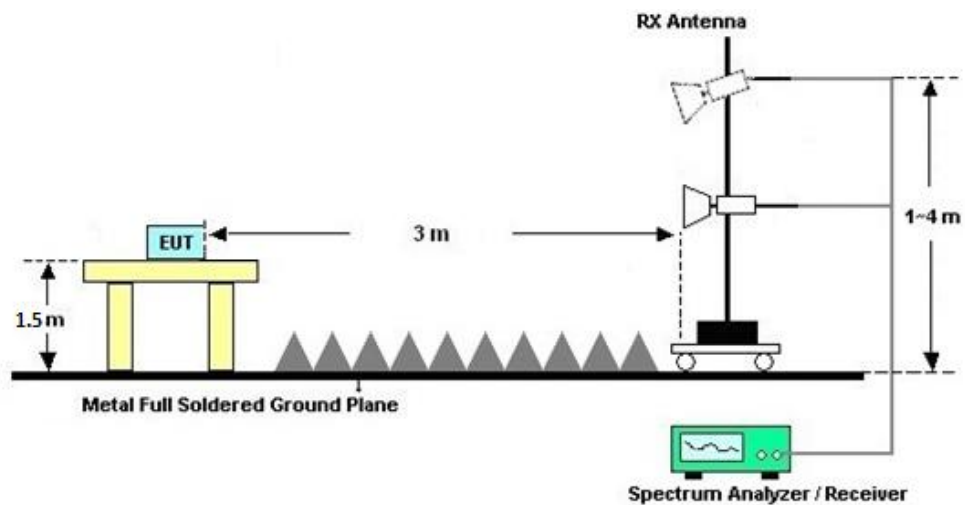



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

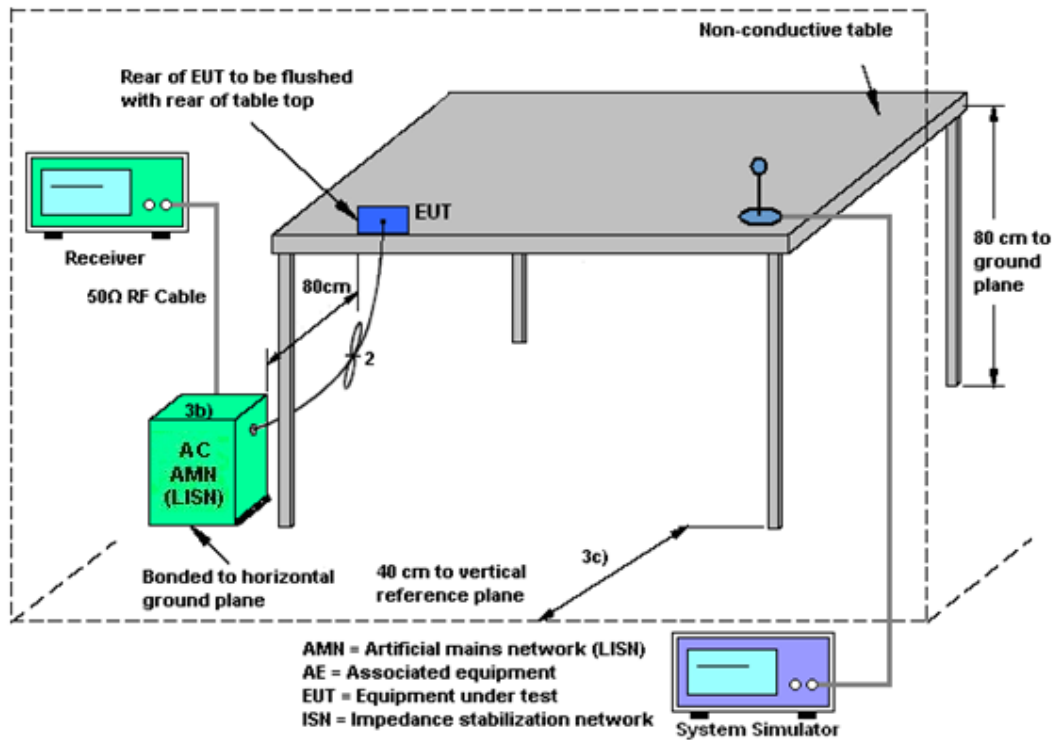

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Sep. 30, 2024 ~Oct. 08, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Sep. 30, 2024 ~Oct. 08, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA24440A	11707	50MHz~40GHz	Dec. 27, 2023	Sep. 30, 2024 ~Oct. 08, 2024	Dec. 26, 2024	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 18, 2023	Sep. 30, 2024 ~Nov. 14, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 14, 2024		Oct. 13, 2025	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Sep. 30, 2024 ~Nov. 14, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Sep. 30, 2024 ~Nov. 14, 2024	Dec. 28, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May. 09, 2024	Sep. 30, 2024 ~Nov. 14, 2024	May. 08, 2025	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2023	Sep. 30, 2024 ~Nov. 14, 2024	Jul. 06, 2025	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 04, 2024	Sep. 30, 2024 ~Nov. 14, 2024	Jul. 03, 2025	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2023	Sep. 30, 2024 ~Nov. 14, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2024		Oct. 17, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Sep. 30, 2024 ~Nov. 14, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024		Oct. 13, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Sep. 30, 2024 ~Nov. 14, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Jul. 03, 2024	Sep. 30, 2024 ~Nov. 14, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 18, 2023	Sep. 30, 2024 ~Nov. 14, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 14, 2024		Oct. 13, 2025	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Sep. 30, 2024 ~Nov. 14, 2024	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Sep. 30, 2024 ~Nov. 14, 2024	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Oct. 21, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Oct. 21, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2022	Oct. 21, 2024	Dec. 24, 2024	Conduction (CO02-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.50dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.10dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.80dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.10dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Xiaobin Han	Temperature:	21~25	°C
Test Date:	2024/9/30~2024/10/8	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant 8	Ant 8		
11b	1Mbps	1	1	2412	12.68	8.10	0.50	Pass
11b	1Mbps	1	6	2437	12.77	8.10	0.50	Pass
11b	1Mbps	1	11	2462	12.77	7.62	0.50	Pass
11g	6Mbps	1	1	2412	16.71	15.16	0.50	Pass
11g	6Mbps	1	6	2437	16.70	15.08	0.50	Pass
11g	6Mbps	1	11	2462	16.77	15.52	0.50	Pass
HT20	MCS0	1	1	2412	17.73	15.16	0.50	Pass
HT20	MCS0	1	6	2437	17.73	15.52	0.50	Pass
HT20	MCS0	1	11	2462	17.81	15.18	0.50	Pass
HT40	MCS0	1	3	2422	36.35	35.20	0.50	Pass
HT40	MCS0	1	6	2437	36.42	35.24	0.50	Pass
HT40	MCS0	1	9	2452	36.50	35.24	0.50	Pass

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant 8	Ant 8	Ant 8	
11b	1Mbps	1	1	2412	-6.47	0.50	8.00	Pass
11b	1Mbps	1	6	2437	-5.22	0.50	8.00	Pass
11b	1Mbps	1	11	2462	-5.23	0.50	8.00	Pass
11g	6Mbps	1	1	2412	-8.84	0.50	8.00	Pass
11g	6Mbps	1	6	2437	-8.31	0.50	8.00	Pass
11g	6Mbps	1	11	2462	-7.77	0.50	8.00	Pass
HT20	MCS0	1	1	2412	-8.25	0.50	8.00	Pass
HT20	MCS0	1	6	2437	-9.56	0.50	8.00	Pass
HT20	MCS0	1	11	2462	-9.36	0.50	8.00	Pass
HT40	MCS0	1	3	2422	-12.43	0.50	8.00	Pass
HT40	MCS0	1	6	2437	-12.89	0.50	8.00	Pass
HT40	MCS0	1	9	2452	-12.98	0.50	8.00	Pass

Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power


2.4GHz Band											
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)		Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 8	SUM					
11b	1Mbps	1	1	2412	13.50	-	30.00	0.50	14.00	36.00	Pass
11b	1Mbps	1	6	2437	15.10		30.00	0.50	15.60	36.00	Pass
11b	1Mbps	1	11	2462	13.60		30.00	0.50	14.10	36.00	Pass
11g	6Mbps	1	1	2412	16.10		30.00	0.50	16.60	36.00	Pass
11g	6Mbps	1	6	2437	16.00		30.00	0.50	16.50	36.00	Pass
11g	6Mbps	1	11	2462	16.00		30.00	0.50	16.50	36.00	Pass
HT20	MCS0	1	1	2412	16.20		30.00	0.50	16.70	36.00	Pass
HT20	MCS0	1	6	2437	16.10		30.00	0.50	16.60	36.00	Pass
HT20	MCS0	1	11	2462	16.10		30.00	0.50	16.60	36.00	Pass
HT40	MCS0	1	3	2422	15.20		30.00	0.50	15.70	36.00	Pass
HT40	MCS0	1	6	2437	15.10		30.00	0.50	15.60	36.00	Pass
HT40	MCS0	1	9	2452	15.00		30.00	0.50	15.50	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

Setting
Ant 8
12.50
14.00
12.50
15.50
15.50
15.50
15.50
15.50
14.50
14.50
14.50




Appendix B. AC Conducted Emission Test Results

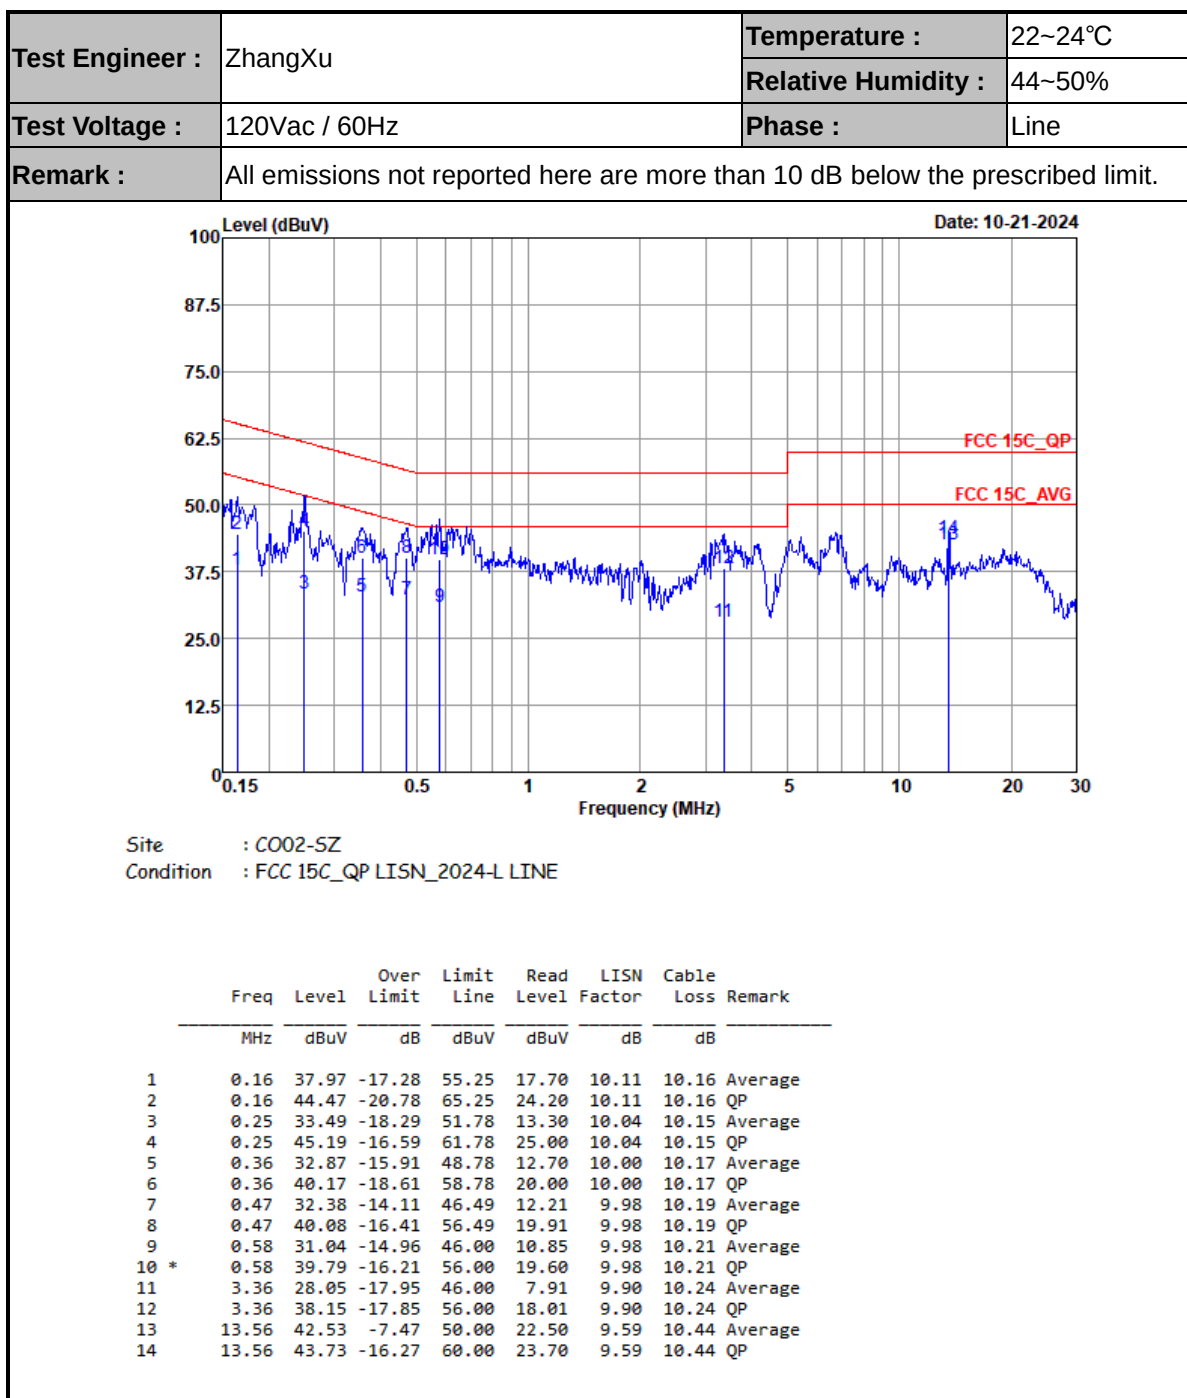



Test Engineer :	ZhangXu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

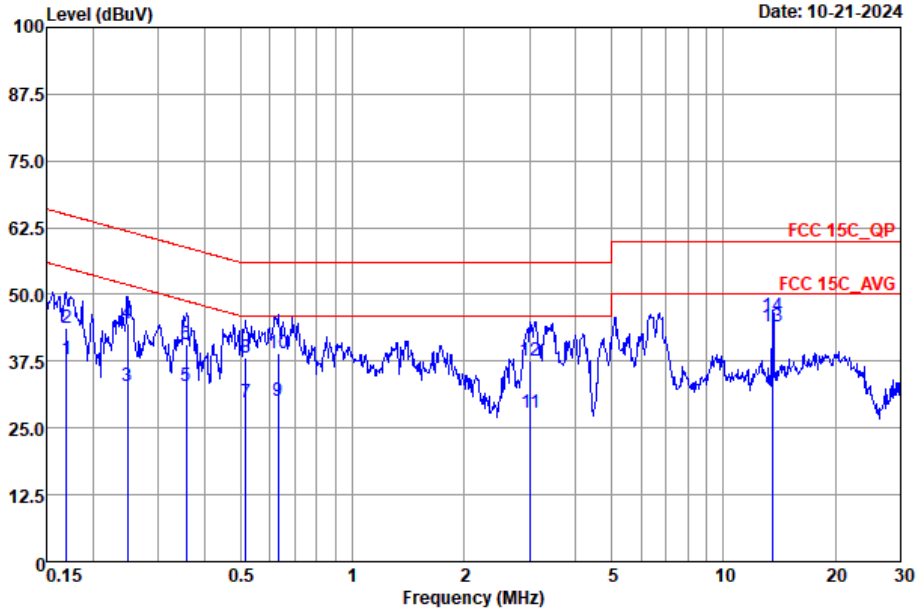

Site : CO02-SZ
Condition : FCC 15C_QP LISN_2024-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.17	37.95	-17.04	54.99	17.70	10.09	10.16	Average
2	0.17	43.85	-21.14	64.99	23.60	10.09	10.16	QP
3	0.25	32.76	-19.06	51.82	12.60	10.01	10.15	Average
4	0.25	44.66	-17.16	61.82	24.50	10.01	10.15	QP
5	0.36	32.94	-15.84	48.78	12.80	9.97	10.17	Average
6	0.36	40.54	-18.24	58.78	20.40	9.97	10.17	QP
7	0.52	29.76	-16.24	46.00	9.60	9.96	10.20	Average
8	0.52	38.06	-17.94	56.00	17.90	9.96	10.20	QP
9	0.63	30.09	-15.91	46.00	9.90	9.97	10.22	Average
10	0.63	38.89	-17.11	56.00	18.70	9.97	10.22	QP
11	3.03	27.95	-18.05	46.00	7.79	9.91	10.25	Average
12	3.03	37.55	-18.45	56.00	17.39	9.91	10.25	QP
13	13.56	43.91	-6.09	50.00	23.80	9.67	10.44	Average
14 *	13.56	46.01	-13.99	60.00	25.90	9.67	10.44	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Wenbo Xiao	Relative Humidity :	50%
		Temperature :	20°C~22°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 11	2400-2483.5	8	802.11b	01	2412	1Mbps	-	-
Mode 12	2400-2483.5	8	802.11b	06	2437	1Mbps	-	-
Mode 13	2400-2483.5	8	802.11b	11	2462	1Mbps	-	-
Mode 14	2400-2483.5	8	802.11g	01	2412	6Mbps	-	-
Mode 15	2400-2483.5	8	802.11g	06	2437	6Mbps	-	-
Mode 16	2400-2483.5	8	802.11g	11	2462	6Mbps	-	-
Mode 17	2400-2483.5	8	802.11n HT20	01	2412	MCS0	Full RU	-
Mode 18	2400-2483.5	8	802.11n HT20	06	2437	MCS0	Full RU	-
Mode 19	2400-2483.5	8	802.11n HT20	11	2462	MCS0	Full RU	-
Mode 20	2400-2483.5	8	802.11n HT40	03	2422	MCS0	Full RU	-
Mode 21	2400-2483.5	8	802.11n HT40	09	2452	MCS0	Full RU	-
Mode 22	2400-2483.5	8	802.11b	06	2437	1Mbps	-	LF
Mode 23	CO_TX	8	Bluetooth-LE	01	2404	2Mbps	-	-
	1	LTE B13 Link						
Mode 24	CO_TX	8	802.11b	06	2437	1Mbps	-	-
	1	LTE B13 Link						







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
11	802.11b	01	2388.26	37.89	54.00	-16.11	H	AVERAGE	Pass	Band Edge
	802.11b	01	4824.00	47.84	54.00	-6.16	H	Average	Pass	Harmonic
12	802.11b	06	2367.15	34.23	54.00	-19.77	V	AVERAGE	Pass	Band Edge
	802.11b	06	4874.00	47.85	54.00	-6.15	H	Average	Pass	Harmonic
13	802.11b	11	2488.30	34.21	54.00	-19.79	H	AVERAGE	Pass	Band Edge
	802.11b	11	4924.00	47.37	54.00	-6.63	H	Average	Pass	Harmonic
14	802.11g	01	2389.95	42.00	54.00	-12.00	H	AVERAGE	Pass	Band Edge
	802.11g	01	4824.00	46.08	74.00	-27.92	H	Peak	Pass	Harmonic
15	802.11g	06	-	-	-	-	-	-	-	Band Edge
	802.11g	06	7311.00	46.15	74.00	-27.85	V	Peak	Pass	Harmonic
16	802.11g	11	2483.51	39.41	54.00	-14.59	H	AVERAGE	Pass	Band Edge
16	802.11g	11	7386.00	46.22	74.00	-27.78	H	Peak	Pass	Harmonic
17	802.11n HT20	01	2389.95	44.33	54.00	-9.67	H	AVERAGE	Pass	Band Edge
17	802.11n HT20	01	4824.00	46.55	74.00	-27.45	H	Peak	Pass	Harmonic
18	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
18	802.11n HT20	06	4874.00	46.21	74.00	-27.79	H	Peak	Pass	Harmonic
19	802.11n HT20	11	2483.58	40.90	54.00	-13.10	V	AVERAGE	Pass	Band Edge
19	802.11n HT20	11	7386.00	46.16	74.00	-27.84	V	Peak	Pass	Harmonic
20	802.11n HT40	03	2389.86	43.54	54.00	-10.46	H	AVERAGE	Pass	Band Edge
20	802.11n HT40	03	-	-	-	-	-	-	-	Harmonic
21	802.11n HT40	09	2489.30	41.93	54.00	-12.07	H	AVERAGE	Pass	Band Edge
21	802.11n HT40	09	-	-	-	-	-	-	-	Harmonic
22	802.11b	06	41.64	32.24	40.00	-7.76	V	Peak	Pass	LF
23	CO-TX	-	2376.05	34.86	54.00	-19.14	V	AVERAGE	Pass	Band Edge
23		-	4808.00	45.56	74.00	-28.44	V	Peak	Pass	Harmonic
24	CO-TX	06	2490.11	33.93	54.00	-20.07	H	AVERAGE	Pass	Band Edge
24		06	4874.00	47.39	54.00	-6.61	H	Average	Pass	Harmonic



Mode	11																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																	
ANT	8																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-10-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.17</td><td>46.08</td><td>74.00</td><td>-27.92</td><td>43.53</td><td>30.72</td><td>5.36</td><td>33.53</td><td>400 330 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	46.08	74.00	-27.92	43.53	30.72	5.36	33.53	400 330 PEAK	Level (dBuV/m) Date: 2024-10-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>91.95</td><td>-----</td><td>-----</td><td>89.40</td><td>30.72</td><td>5.38</td><td>33.55</td><td>400 330 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	91.95	-----	-----	89.40	30.72	5.38	33.55	400 330 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.17	46.08	74.00	-27.92	43.53	30.72	5.36	33.53	400 330 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	91.95	-----	-----	89.40	30.72	5.38	33.55	400 330 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-10-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.26</td><td>37.89</td><td>54.00</td><td>-16.11</td><td>35.34</td><td>30.72</td><td>5.36</td><td>33.53</td><td>400 330 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.26	37.89	54.00	-16.11	35.34	30.72	5.36	33.53	400 330 AVERAGE	Level (dBuV/m) Date: 2024-10-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>89.61</td><td>-----</td><td>-----</td><td>87.06</td><td>30.72</td><td>5.38</td><td>33.55</td><td>400 330 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	89.61	-----	-----	87.06	30.72	5.38	33.55	400 330 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2388.26	37.89	54.00	-16.11	35.34	30.72	5.36	33.53	400 330 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	89.61	-----	-----	87.06	30.72	5.38	33.55	400 330 AVERAGE																																																																									

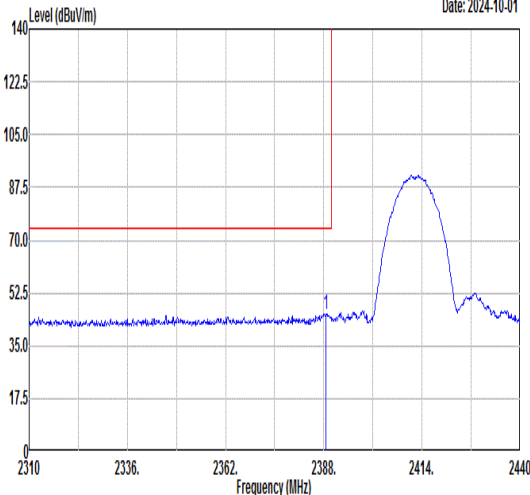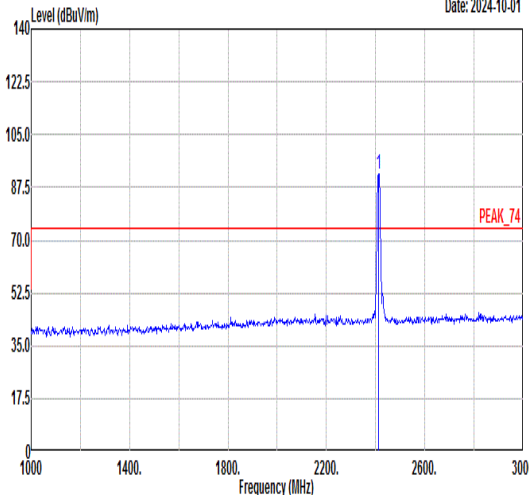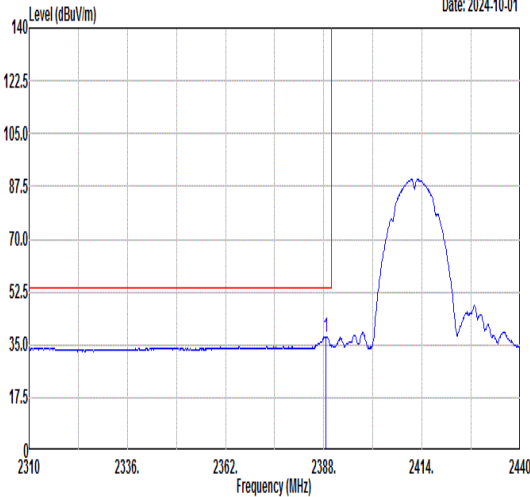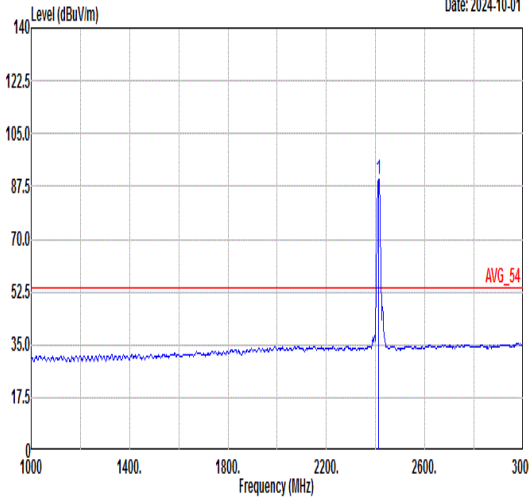

		11																																																																																							
Mode		Band Edge																																																																																							
		2400-2483.5_802.11b_CH01_2412MHz																																																																																							
ANT		8																																																																																							
Pol.		Vertical					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-10-01 					Level (dBuV/m) Date: 2024-10-01 																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2388.52</td><td>45.41</td><td>74.00</td><td>-28.59</td><td>42.86</td><td>30.72</td><td>5.36</td><td>33.53</td><td>400</td><td>247 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2388.52	45.41	74.00	-28.59	42.86	30.72	5.36	33.53	400	247 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>92.00</td><td>-----</td><td>-----</td><td>89.45</td><td>30.72</td><td>5.38</td><td>33.55</td><td>400</td><td>247 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	92.00	-----	-----	89.45	30.72	5.38	33.55	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2388.52	45.41	74.00	-28.59	42.86	30.72	5.36	33.53	400	247 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2412.00	92.00	-----	-----	89.45	30.72	5.38	33.55	400	247 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2024-10-01 					Level (dBuV/m) Date: 2024-10-01 																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2388.52</td><td>37.59</td><td>54.00</td><td>-16.41</td><td>35.04</td><td>30.72</td><td>5.36</td><td>33.53</td><td>400</td><td>247 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2388.52	37.59	54.00	-16.41	35.04	30.72	5.36	33.53	400	247 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>89.67</td><td>-----</td><td>-----</td><td>87.12</td><td>30.72</td><td>5.38</td><td>33.55</td><td>400</td><td>247 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	89.67	-----	-----	87.12	30.72	5.38	33.55	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2388.52	37.59	54.00	-16.41	35.04	30.72	5.36	33.53	400	247 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2412.00	89.67	-----	-----	87.12	30.72	5.38	33.55	400	247 AVERAGE																																																																																



Mode	11										
	Harmonic										
	2400-2483.5_802.11b_CH01_2412MHz										
ANT	8										
Pol.	Horizontal						Vertical				
Peak Avg	Data: 1 Level (dBuV/m) <										



Mode	12																																																																											
	Band Edge - L																																																																											
	2400-2483.5_802.11b_CH06_2437MHz																																																																											
ANT	8																																																																											
Pol.	Horizontal					Fundamental																																																																						
Peak	Level (dBuV/m) Date: 2024-10-04 1 2329.18 45.20 74.00 -28.80 42.66 30.73 5.31 33.50 200 10 PEAK <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2329.18</td><td>45.20</td><td>74.00</td><td>-28.80</td><td>42.66</td><td>30.73</td><td>5.31</td><td>33.50</td><td>200</td><td>10 PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2329.18	45.20	74.00	-28.80	42.66	30.73	5.31	33.50	200	10 PEAK	Level (dBuV/m) Date: 2024-10-04 1 2437.00 88.01 ----- 85.45 30.71 5.41 33.56 200 10 PEAK <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>88.01</td><td>-----</td><td>85.45</td><td>30.71</td><td>5.41</td><td>33.56</td><td>200</td><td>10</td><td>PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2437.00	88.01	-----	85.45	30.71	5.41	33.56	200	10	PEAK
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2329.18	45.20	74.00	-28.80	42.66	30.73	5.31	33.50	200	10 PEAK																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2437.00	88.01	-----	85.45	30.71	5.41	33.56	200	10	PEAK																																																																		
Avg	Level (dBuV/m) Date: 2024-10-04 1 2377.06 34.13 54.00 -19.87 31.59 30.72 5.35 33.53 200 10 AVERAGE <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2377.06</td><td>34.13</td><td>54.00</td><td>-19.87</td><td>31.59</td><td>30.72</td><td>5.35</td><td>33.53</td><td>200</td><td>10 AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2377.06	34.13	54.00	-19.87	31.59	30.72	5.35	33.53	200	10 AVERAGE	Level (dBuV/m) Date: 2024-10-04 1 2437.00 85.66 ----- 83.10 30.71 5.41 33.56 200 10 AVERAGE <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>85.66</td><td>-----</td><td>83.10</td><td>30.71</td><td>5.41</td><td>33.56</td><td>200</td><td>10</td><td>AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2437.00	85.66	-----	83.10	30.71	5.41	33.56	200	10	AVERAGE
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2377.06	34.13	54.00	-19.87	31.59	30.72	5.35	33.53	200	10 AVERAGE																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2437.00	85.66	-----	83.10	30.71	5.41	33.56	200	10	AVERAGE																																																																		



Mode	12																																										
	Band Edge - R																																										
	2400-2483.5_802.11b_CH06_2437MHz																																										
ANT	8																																										
Pol.	Horizontal					Fundamental																																					
Peak	Date: 2024-10-04 PEAK_BE_74 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2493.57</td><td>44.86</td><td>74.00</td><td>-29.14</td><td>42.29</td><td>30.70</td><td>5.47</td><td>33.60</td><td>200</td><td>10 PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2493.57	44.86	74.00	-29.14	42.29	30.70	5.47	33.60	200	10 PEAK	Blank				
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																		
1	2493.57	44.86	74.00	-29.14	42.29	30.70	5.47	33.60	200	10 PEAK																																	
Avg	Date: 2024-10-04 AVG_BE_54 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.35</td><td>33.71</td><td>54.00</td><td>-20.29</td><td>31.13</td><td>30.70</td><td>5.47</td><td>33.59</td><td>200</td><td>10 AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2488.35	33.71	54.00	-20.29	31.13	30.70	5.47	33.59	200	10 AVERAGE	Blank				
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																		
1	2488.35	33.71	54.00	-20.29	31.13	30.70	5.47	33.59	200	10 AVERAGE																																	





Mode	12																																																																																			
	Band Edge - L																																																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																																																			
ANT	8																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-10-04 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2363.59</td><td>44.66</td><td>74.00</td><td>-29.34</td><td>42.11</td><td>30.73</td><td>5.34</td><td>33.52</td><td>190</td><td>0 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2363.59	44.66	74.00	-29.34	42.11	30.73	5.34	33.52	190	0 PEAK	Level (dBuV/m) Date: 2024-10-04 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>70.63</td><td>-----</td><td>-----</td><td>68.07</td><td>30.71</td><td>5.41</td><td>33.56</td><td>190</td><td>0 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	70.63	-----	-----	68.07	30.71	5.41	33.56	190	0 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2363.59	44.66	74.00	-29.34	42.11	30.73	5.34	33.52	190	0 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2437.00	70.63	-----	-----	68.07	30.71	5.41	33.56	190	0 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-10-04 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2367.15</td><td>34.23</td><td>54.00</td><td>-19.77</td><td>31.68</td><td>30.73</td><td>5.34</td><td>33.52</td><td>190</td><td>0 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2367.15	34.23	54.00	-19.77	31.68	30.73	5.34	33.52	190	0 AVERAGE	Level (dBuV/m) Date: 2024-10-04 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>68.07</td><td>-----</td><td>-----</td><td>65.51</td><td>30.71</td><td>5.41</td><td>33.56</td><td>190</td><td>0 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	68.07	-----	-----	65.51	30.71	5.41	33.56	190	0 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2367.15	34.23	54.00	-19.77	31.68	30.73	5.34	33.52	190	0 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2437.00	68.07	-----	-----	65.51	30.71	5.41	33.56	190	0 AVERAGE																																																																										







Mode	12																																											
	Band Edge - R																																											
	2400-2483.5_802.11b_CH06_2437MHz																																											
ANT	8																																											
Pol.	Vertical						Fundamental																																					
Peak	Date: 2024-10-04 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2486.08</td><td>44.57</td><td>74.00</td><td>-29.43</td><td>42.00</td><td>30.70</td><td>5.46</td><td>33.59</td><td>190</td><td>0 PEAK</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2486.08	44.57	74.00	-29.43	42.00	30.70	5.46	33.59	190	0 PEAK	Blank				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																			
1	2486.08	44.57	74.00	-29.43	42.00	30.70	5.46	33.59	190	0 PEAK																																		
Avg	Date: 2024-10-04 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2494.83</td><td>33.72</td><td>54.00</td><td>-20.28</td><td>31.15</td><td>30.70</td><td>5.47</td><td>33.60</td><td>190</td><td>0 AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2494.83	33.72	54.00	-20.28	31.15	30.70	5.47	33.60	190	0 AVERAGE	Blank				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																			
1	2494.83	33.72	54.00	-20.28	31.15	30.70	5.47	33.60	190	0 AVERAGE																																		

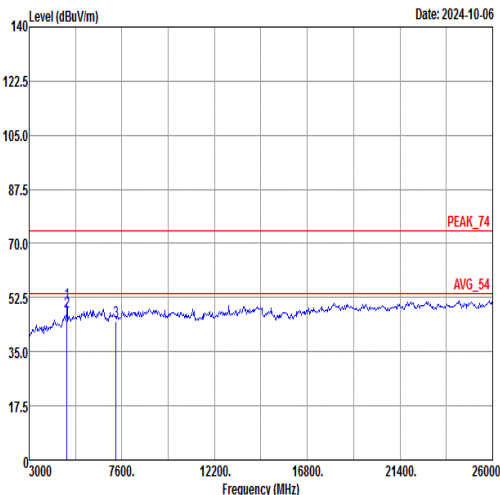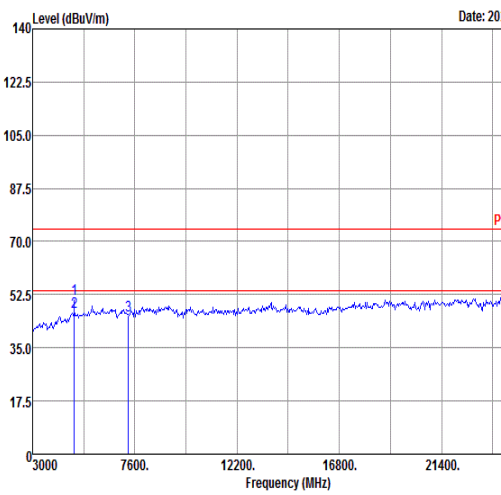

Mode	12																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																											
ANT	8																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg	Data: 1 Date: 2024-10-06  <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>4874.00</td><td>50.65</td><td>-23.35</td><td>74.00</td><td>56.94</td><td>36.50</td><td>8.76</td><td>51.55</td><td>100</td><td>295 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>47.85</td><td>-6.15</td><td>54.00</td><td>54.10</td><td>36.50</td><td>8.76</td><td>51.55</td><td>100</td><td>295 Average</td></tr><tr><td>3</td><td>7311.00</td><td>44.92</td><td>-29.08</td><td>74.00</td><td>49.01</td><td>36.89</td><td>10.18</td><td>51.16</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos			Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 *	4874.00	50.65	-23.35	74.00	56.94	36.50	8.76	51.55	100	295 Peak	2	4874.00	47.85	-6.15	54.00	54.10	36.50	8.76	51.55	100	295 Average	3	7311.00	44.92	-29.08	74.00	49.01	36.89	10.18	51.16	---	---	Peak	Data: 2 Date: 2024-10-06  <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>4874.00</td><td>50.99</td><td>-23.01</td><td>74.00</td><td>57.28</td><td>36.50</td><td>8.76</td><td>51.55</td><td>383</td><td>233 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>46.84</td><td>-7.16</td><td>54.00</td><td>53.13</td><td>36.50</td><td>8.76</td><td>51.55</td><td>383</td><td>233 Average</td></tr><tr><td>3</td><td>7311.00</td><td>45.60</td><td>-28.40</td><td>74.00</td><td>49.69</td><td>36.89</td><td>10.18</td><td>51.16</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos			Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 *	4874.00	50.99	-23.01	74.00	57.28	36.50	8.76	51.55	383	233 Peak	2	4874.00	46.84	-7.16	54.00	53.13	36.50	8.76	51.55	383	233 Average	3	7311.00	45.60	-28.40	74.00	49.69	36.89	10.18	51.16	---	---	Peak
		Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos																																																																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark																																																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1 *	4874.00	50.65	-23.35	74.00	56.94	36.50	8.76	51.55	100	295 Peak																																																																																																																																		
2	4874.00	47.85	-6.15	54.00	54.10	36.50	8.76	51.55	100	295 Average																																																																																																																																		
3	7311.00	44.92	-29.08	74.00	49.01	36.89	10.18	51.16	---	---	Peak																																																																																																																																	
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos																																																																																																																																					
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark																																																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1 *	4874.00	50.99	-23.01	74.00	57.28	36.50	8.76	51.55	383	233 Peak																																																																																																																																		
2	4874.00	46.84	-7.16	54.00	53.13	36.50	8.76	51.55	383	233 Average																																																																																																																																		
3	7311.00	45.60	-28.40	74.00	49.69	36.89	10.18	51.16	---	---	Peak																																																																																																																																	

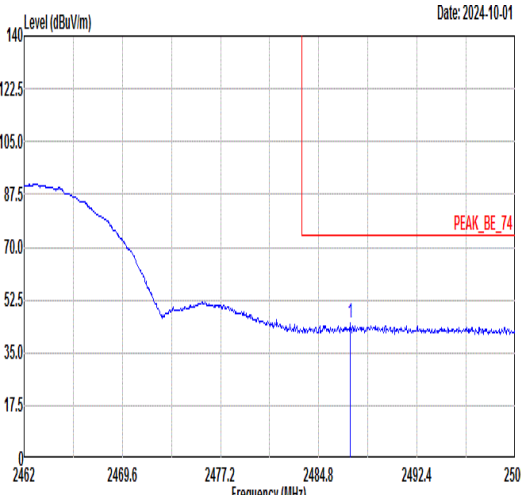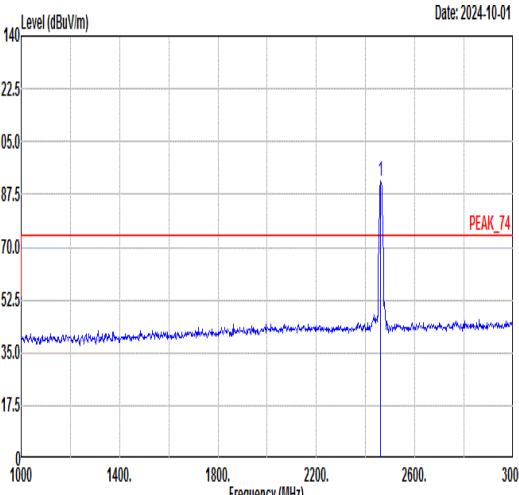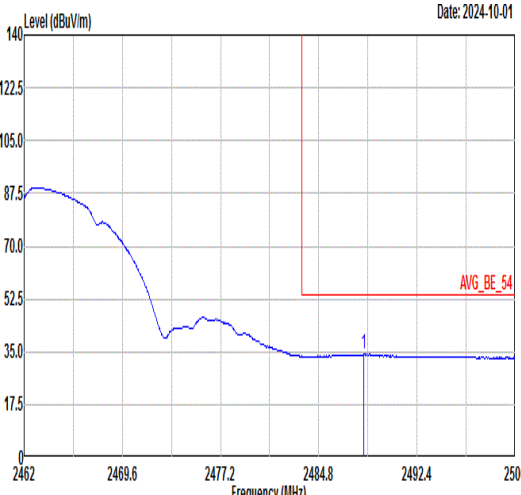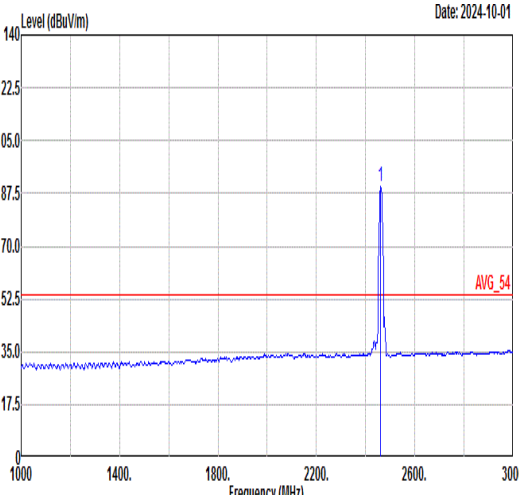

Mode	13																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11b_CH11_2462MHz																																																																																											
ANT	8																																																																																											
Pol.	Horizontal					Fundamental																																																																																						
Peak	 Level (dBuV/m) Date: 2024-10-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.23</td><td>44.71</td><td>74.00</td><td>-29.29</td><td>42.14</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>289 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2487.23	44.71	74.00	-29.29	42.14	30.70	5.46	33.59	100	289 PEAK	 Level (dBuV/m) Date: 2024-10-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>91.94</td><td>-----</td><td>-----</td><td>89.37</td><td>30.71</td><td>5.44</td><td>33.58</td><td>100</td><td>289 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	91.94	-----	-----	89.37	30.71	5.44	33.58	100	289 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2487.23	44.71	74.00	-29.29	42.14	30.70	5.46	33.59	100	289 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	91.94	-----	-----	89.37	30.71	5.44	33.58	100	289 PEAK																																																																																		
Avg	 Level (dBuV/m) Date: 2024-10-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.30</td><td>34.21</td><td>54.00</td><td>-19.79</td><td>31.63</td><td>30.70</td><td>5.47</td><td>33.59</td><td>100</td><td>289 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2488.30	34.21	54.00	-19.79	31.63	30.70	5.47	33.59	100	289 AVERAGE	 Level (dBuV/m) Date: 2024-10-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>89.61</td><td>-----</td><td>-----</td><td>87.05</td><td>30.71</td><td>5.43</td><td>33.58</td><td>100</td><td>289 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	89.61	-----	-----	87.05	30.71	5.43	33.58	100	289 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2488.30	34.21	54.00	-19.79	31.63	30.70	5.47	33.59	100	289 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	89.61	-----	-----	87.05	30.71	5.43	33.58	100	289 AVERAGE																																																																																		







Mode	13																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																	
ANT	8																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-10-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2493.77</td><td>44.41</td><td>74.00</td><td>-29.59</td><td>41.84</td><td>30.70</td><td>5.47</td><td>33.60</td><td>379 240 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2493.77	44.41	74.00	-29.59	41.84	30.70	5.47	33.60	379 240 PEAK	Level (dBuV/m) Date: 2024-10-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>91.81</td><td>-----</td><td>-----</td><td>89.24</td><td>30.71</td><td>5.44</td><td>33.58</td><td>379 240 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	91.81	-----	-----	89.24	30.71	5.44	33.58	379 240 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2493.77	44.41	74.00	-29.59	41.84	30.70	5.47	33.60	379 240 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	91.81	-----	-----	89.24	30.71	5.44	33.58	379 240 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-10-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.26</td><td>33.73</td><td>54.00</td><td>-20.27</td><td>31.15</td><td>30.70</td><td>5.47</td><td>33.59</td><td>379 240 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2488.26	33.73	54.00	-20.27	31.15	30.70	5.47	33.59	379 240 AVERAGE	Level (dBuV/m) Date: 2024-10-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>89.43</td><td>-----</td><td>-----</td><td>86.86</td><td>30.71</td><td>5.44</td><td>33.58</td><td>379 240 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	89.43	-----	-----	86.86	30.71	5.44	33.58	379 240 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2488.26	33.73	54.00	-20.27	31.15	30.70	5.47	33.59	379 240 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	89.43	-----	-----	86.86	30.71	5.44	33.58	379 240 AVERAGE																																																																									



Mode	13															
	Harmonic															
	2400-2483.5_802.11b_CH11_2462MHz															
ANT	8															
Pol.	Horizontal								Vertical							
Peak Avg	Data: 1 Level (dBuV/m) </															

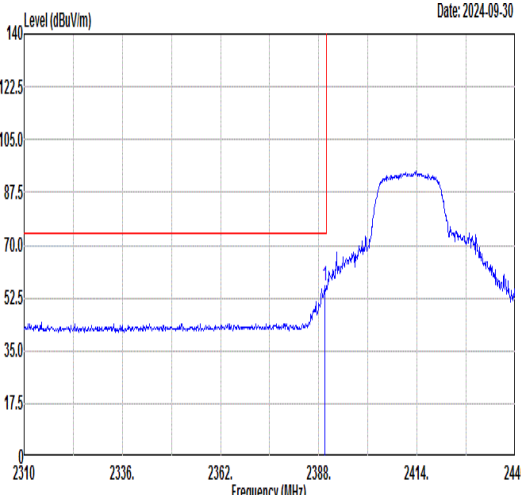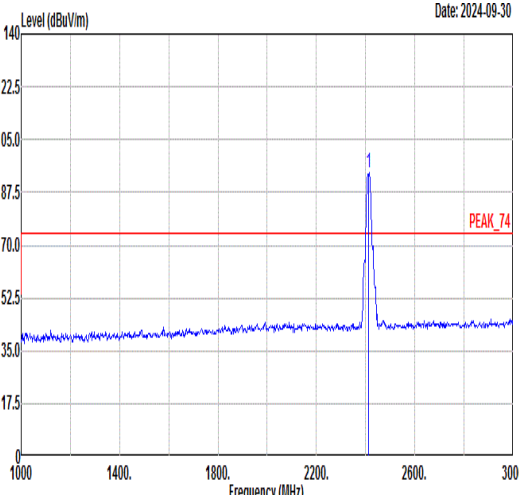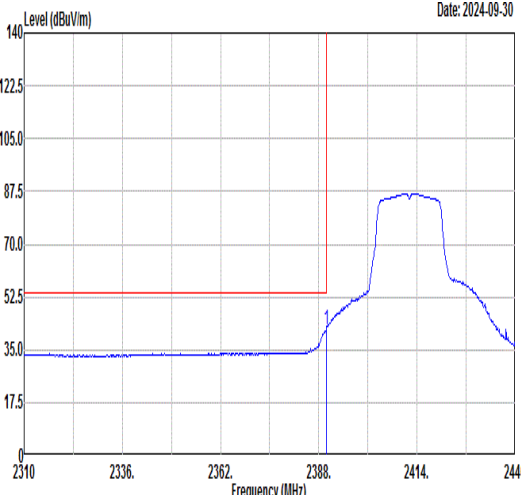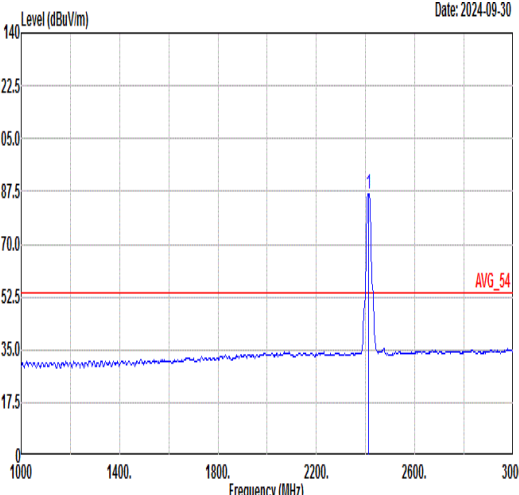

Mode	14																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH01_2412MHz																																																																																									
ANT	8																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	 Level (dBuV/m) Date: 2024-09-30 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.56</td><td>56.62</td><td>74.00</td><td>-17.38</td><td>54.07</td><td>30.72</td><td>5.36</td><td>33.53</td><td>165</td><td>334 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.56	56.62	74.00	-17.38	54.07	30.72	5.36	33.53	165	334 PEAK	 Level (dBuV/m) Date: 2024-09-30 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>94.17</td><td>-----</td><td>-----</td><td>91.62</td><td>30.72</td><td>5.38</td><td>33.55</td><td>165</td><td>334 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	94.17	-----	-----	91.62	30.72	5.38	33.55	165	334 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.56	56.62	74.00	-17.38	54.07	30.72	5.36	33.53	165	334 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	94.17	-----	-----	91.62	30.72	5.38	33.55	165	334 PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2024-09-30 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.95</td><td>42.00</td><td>54.00</td><td>-12.00</td><td>39.45</td><td>30.72</td><td>5.36</td><td>33.53</td><td>165</td><td>334 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.95	42.00	54.00	-12.00	39.45	30.72	5.36	33.53	165	334 AVERAGE	 Level (dBuV/m) Date: 2024-09-30 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>86.72</td><td>-----</td><td>-----</td><td>84.17</td><td>30.72</td><td>5.38</td><td>33.55</td><td>165</td><td>334 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	86.72	-----	-----	84.17	30.72	5.38	33.55	165	334 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.95	42.00	54.00	-12.00	39.45	30.72	5.36	33.53	165	334 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	86.72	-----	-----	84.17	30.72	5.38	33.55	165	334 AVERAGE																																																																																	



Mode	14	
	Band Edge	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	8	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2024-09-30 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2389.30 55.41 74.00 -18.59 52.86 30.72 5.36 33.53 400 241 PEAK	Level (dBuV/m) Date: 2024-09-30 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2412.00 93.26 ----- 90.71 30.72 5.38 33.55 400 241 PEAK
	Level (dBuV/m) Date: 2024-09-30 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2389.95 39.73 54.00 -14.27 37.18 30.72 5.36 33.53 400 241 AVERAGE	Level (dBuV/m) Date: 2024-09-30 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2412.00 85.89 ----- 83.34 30.72 5.38 33.55 400 241 AVERAGE



Mode	14																																																																																												
	Harmonic																																																																																												
	2400-2483.5_802.11g_CH01_2412MHz																																																																																												
ANT	8																																																																																												
Pol.	Horizontal						Vertical																																																																																						
Peak Avg	Level (dBuV/m) Date: 2024-10-01 PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>46.08</td><td>74.00</td><td>-27.92</td><td>52.99</td><td>35.78</td><td>8.88</td><td>51.57</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	46.08	74.00	-27.92	52.99	35.78	8.88	51.57	---	---	Peak	Level (dBuV/m) Date: 2024-10-01 PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>45.69</td><td>74.00</td><td>-28.31</td><td>52.60</td><td>35.78</td><td>8.88</td><td>51.57</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.69	74.00	-28.31	52.60	35.78	8.88	51.57	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4824.00	46.08	74.00	-27.92	52.99	35.78	8.88	51.57	---	---	Peak																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4824.00	45.69	74.00	-28.31	52.60	35.78	8.88	51.57	---	---	Peak																																																																																		



Mode	15																																																																																													
	Harmonic																																																																																													
	2400-2483.5_802.11g_CH06_2437MHz																																																																																													
ANT	8																																																																																													
Pol.	Horizontal																																																																																													
Peak Avg	Level (dBuV/m) Date: 2024-10-01 Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>4874.00</td><td>45.28</td><td>74.00</td><td>-28.72</td><td>52.21</td><td>35.90</td><td>8.72</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.75</td><td>74.00</td><td>-28.25</td><td>49.85</td><td>36.88</td><td>10.18</td><td>51.16</td><td>---</td><td>---</td><td>Peak</td></tr></table>												MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	4874.00	45.28	74.00	-28.72	52.21	35.90	8.72	51.55	---	---	Peak	2	7311.00	45.75	74.00	-28.25	49.85	36.88	10.18	51.16	---	---	Peak	Level (dBuV/m) Date: 2024-10-01 Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>4874.00</td><td>45.01</td><td>74.00</td><td>-28.99</td><td>51.94</td><td>35.90</td><td>8.72</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>46.15</td><td>74.00</td><td>-27.85</td><td>50.25</td><td>36.88</td><td>10.18</td><td>51.16</td><td>---</td><td>---</td><td>Peak</td></tr></table>												MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	4874.00	45.01	74.00	-28.99	51.94	35.90	8.72	51.55	---	---	Peak	2	7311.00	46.15	74.00	-27.85	50.25	36.88	10.18	51.16	---	---	Peak
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																																		
	1	4874.00	45.28	74.00	-28.72	52.21	35.90	8.72	51.55	---	---	Peak																																																																																		
2	7311.00	45.75	74.00	-28.25	49.85	36.88	10.18	51.16	---	---	Peak																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																																			
1	4874.00	45.01	74.00	-28.99	51.94	35.90	8.72	51.55	---	---	Peak																																																																																			
2	7311.00	46.15	74.00	-27.85	50.25	36.88	10.18	51.16	---	---	Peak																																																																																			



Mode	16																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																	
ANT	8																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-10-01 1 2483.66 57.48 74.00 -16.52 54.91 30.70 5.46 33.59 154 334 PEAK <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.66</td><td>57.48</td><td>74.00</td><td>-16.52</td><td>54.91</td><td>30.70</td><td>5.46</td><td>33.59</td><td>154 334 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	57.48	74.00	-16.52	54.91	30.70	5.46	33.59	154 334 PEAK	Level (dBuV/m) Date: 2024-10-01 1 2462.00 94.89 ----- 92.32 30.71 5.44 33.58 154 334 PEAK <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>94.89</td><td>-----</td><td>-----</td><td>92.32</td><td>30.71</td><td>5.44</td><td>33.58</td><td>154 334 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	94.89	-----	-----	92.32	30.71	5.44	33.58	154 334 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.66	57.48	74.00	-16.52	54.91	30.70	5.46	33.59	154 334 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	94.89	-----	-----	92.32	30.71	5.44	33.58	154 334 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-10-01 1 2483.51 39.41 54.00 -14.59 36.84 30.70 5.46 33.59 154 334 AVERAGE <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>39.41</td><td>54.00</td><td>-14.59</td><td>36.84</td><td>30.70</td><td>5.46</td><td>33.59</td><td>154 334 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	39.41	54.00	-14.59	36.84	30.70	5.46	33.59	154 334 AVERAGE	Level (dBuV/m) Date: 2024-10-01 1 2462.00 88.00 ----- 85.44 30.71 5.43 33.58 154 334 AVERAGE <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>88.00</td><td>-----</td><td>-----</td><td>85.44</td><td>30.71</td><td>5.43</td><td>33.58</td><td>154 334 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	88.00	-----	-----	85.44	30.71	5.43	33.58	154 334 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.51	39.41	54.00	-14.59	36.84	30.70	5.46	33.59	154 334 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	88.00	-----	-----	85.44	30.71	5.43	33.58	154 334 AVERAGE																																																																									



Mode	16																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																	
ANT	8																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-10-01 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>56.58</td><td>74.00</td><td>-17.42</td><td>54.01</td><td>30.70</td><td>5.46</td><td>33.59</td><td>334 236 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	56.58	74.00	-17.42	54.01	30.70	5.46	33.59	334 236 PEAK	Level (dBuV/m) Date: 2024-10-01 PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>92.44</td><td>-----</td><td>-----</td><td>89.87</td><td>30.71</td><td>5.44</td><td>33.58</td><td>334 236 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	92.44	-----	-----	89.87	30.71	5.44	33.58	334 236 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.55	56.58	74.00	-17.42	54.01	30.70	5.46	33.59	334 236 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	92.44	-----	-----	89.87	30.71	5.44	33.58	334 236 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-10-01 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>38.67</td><td>54.00</td><td>-15.33</td><td>36.10</td><td>30.70</td><td>5.46</td><td>33.59</td><td>334 236 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	38.67	54.00	-15.33	36.10	30.70	5.46	33.59	334 236 AVERAGE	Level (dBuV/m) Date: 2024-10-01 AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>85.75</td><td>-----</td><td>-----</td><td>83.18</td><td>30.71</td><td>5.44</td><td>33.58</td><td>334 236 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	85.75	-----	-----	83.18	30.71	5.44	33.58	334 236 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.51	38.67	54.00	-15.33	36.10	30.70	5.46	33.59	334 236 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	85.75	-----	-----	83.18	30.71	5.44	33.58	334 236 AVERAGE																																																																									







Mode	16																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																									
ANT	8																																																																																																									
Pol.	Horizontal												Vertical																																																																																													
Peak Avg	Level (dBuV/m) Date: 2024-10-01 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>44.42</td><td>74.00</td><td>-29.58</td><td>51.36</td><td>36.02</td><td>8.57</td><td>51.53 --- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.22</td><td>74.00</td><td>-27.78</td><td>50.37</td><td>36.85</td><td>10.18</td><td>51.18 --- Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4924.00	44.42	74.00	-29.58	51.36	36.02	8.57	51.53 --- Peak	2	7386.00	46.22	74.00	-27.78	50.37	36.85	10.18	51.18 --- Peak	Level (dBuV/m) Date: 2024-10-01 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.82</td><td>74.00</td><td>-30.18</td><td>50.76</td><td>36.02</td><td>8.57</td><td>51.53 --- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.08</td><td>74.00</td><td>-27.92</td><td>50.23</td><td>36.85</td><td>10.18</td><td>51.18 --- Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4924.00	43.82	74.00	-30.18	50.76	36.02	8.57	51.53 --- Peak	2	7386.00	46.08	74.00	-27.92	50.23	36.85	10.18	51.18 --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																		
1	4924.00	44.42	74.00	-29.58	51.36	36.02	8.57	51.53 --- Peak																																																																																																		
2	7386.00	46.22	74.00	-27.78	50.37	36.85	10.18	51.18 --- Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																			
1	4924.00	43.82	74.00	-30.18	50.76	36.02	8.57	51.53 --- Peak																																																																																																		
2	7386.00	46.08	74.00	-27.92	50.23	36.85	10.18	51.18 --- Peak																																																																																																		



		17																																																																																										
Mode		Band Edge																																																																																										
		2400-2483.5_802.11n HT20_CH01_Full RU_2412MHz																																																																																										
ANT		8																																																																																										
Pol.	Horizontal										Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2024-09-30 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>59.94</td><td>74.00</td><td>-14.06</td><td>57.39</td><td>30.72</td><td>5.36</td><td>33.53</td><td>165</td><td>337</td><td>PEAK</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2389.69	59.94	74.00	-14.06	57.39	30.72	5.36	33.53	165	337	PEAK	Level (dBuV/m) Date: 2024-09-30 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>94.53</td><td>-----</td><td>-----</td><td>91.98</td><td>30.72</td><td>5.38</td><td>33.55</td><td>165</td><td>337</td><td>PEAK</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	94.53	-----	-----	91.98	30.72	5.38	33.55	165	337	PEAK
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.69	59.94	74.00	-14.06	57.39	30.72	5.36	33.53	165	337	PEAK																																																																																	
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	94.53	-----	-----	91.98	30.72	5.38	33.55	165	337	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-09-30 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>44.33</td><td>54.00</td><td>-9.67</td><td>41.78</td><td>30.72</td><td>5.36</td><td>33.53</td><td>165</td><td>337</td><td>AVERAGE</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2389.95	44.33	54.00	-9.67	41.78	30.72	5.36	33.53	165	337	AVERAGE	Level (dBuV/m) Date: 2024-09-30 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>86.69</td><td>-----</td><td>-----</td><td>84.14</td><td>30.72</td><td>5.38</td><td>33.55</td><td>165</td><td>337</td><td>AVERAGE</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	86.69	-----	-----	84.14	30.72	5.38	33.55	165	337	AVERAGE
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.95	44.33	54.00	-9.67	41.78	30.72	5.36	33.53	165	337	AVERAGE																																																																																	
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	86.69	-----	-----	84.14	30.72	5.38	33.55	165	337	AVERAGE																																																																																	

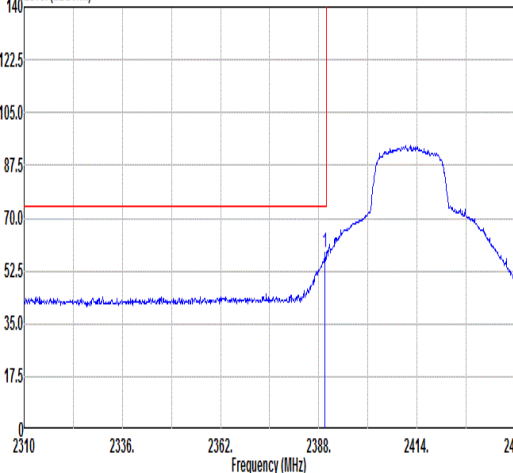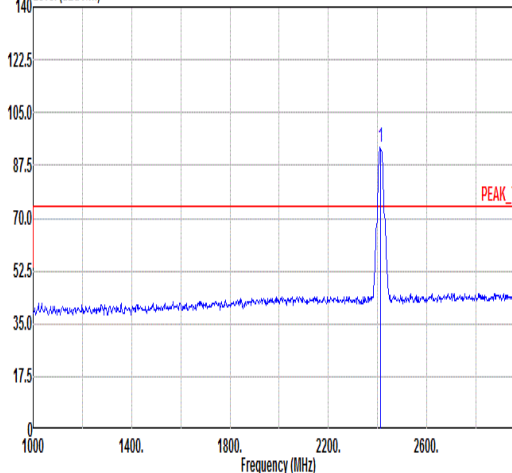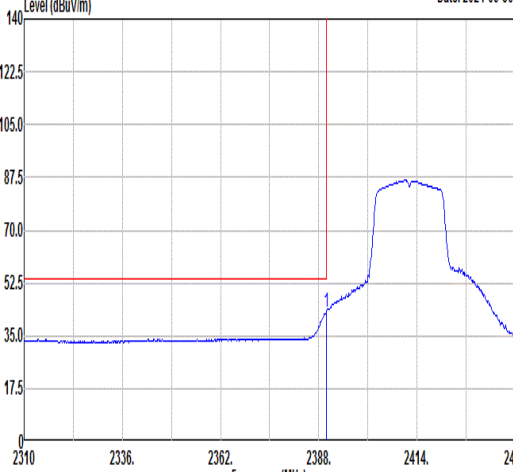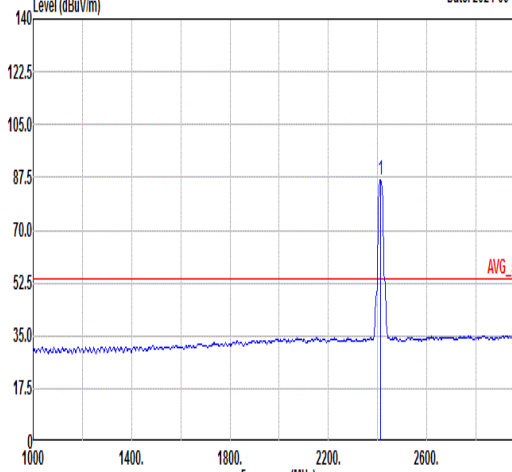

Mode	17																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n HT20_CH01_Full RU_2412MHz																																																																																	
ANT	8																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-30  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>58.63</td><td>74.00</td><td>-15.37</td><td>56.08</td><td>30.72</td><td>5.36</td><td>33.53</td><td>400 246 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	58.63	74.00	-15.37	56.08	30.72	5.36	33.53	400 246 PEAK	Level (dBuV/m) Date: 2024-09-30  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>93.65</td><td>-----</td><td>-----</td><td>91.10</td><td>30.72</td><td>5.38</td><td>33.55</td><td>400 246 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.65	-----	-----	91.10	30.72	5.38	33.55	400 246 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.69	58.63	74.00	-15.37	56.08	30.72	5.36	33.53	400 246 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	93.65	-----	-----	91.10	30.72	5.38	33.55	400 246 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-09-30  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>42.58</td><td>54.00</td><td>-11.42</td><td>40.03</td><td>30.72</td><td>5.36</td><td>33.53</td><td>400 246 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	42.58	54.00	-11.42	40.03	30.72	5.36	33.53	400 246 AVERAGE	Level (dBuV/m) Date: 2024-09-30  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>86.42</td><td>-----</td><td>-----</td><td>83.87</td><td>30.72</td><td>5.38</td><td>33.55</td><td>400 246 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	86.42	-----	-----	83.87	30.72	5.38	33.55	400 246 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.95	42.58	54.00	-11.42	40.03	30.72	5.36	33.53	400 246 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	86.42	-----	-----	83.87	30.72	5.38	33.55	400 246 AVERAGE																																																																									



Mode	17																																																																																													
	Harmonic																																																																																													
	2400-2483.5_802.11n HT20_CH01_Full RU_2412MHz																																																																																													
ANT	8																																																																																													
Pol.	Horizontal						Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2024-10-01 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>46.55</td><td>74.00</td><td>-27.45</td><td>53.46</td><td>35.78</td><td>8.88</td><td>51.57</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	46.55	74.00	-27.45	53.46	35.78	8.88	51.57	---	---	Peak	Level (dBuV/m) Date: 2024-10-01 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>45.15</td><td>74.00</td><td>-28.85</td><td>52.06</td><td>35.78</td><td>8.88</td><td>51.57</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.15	74.00	-28.85	52.06	35.78	8.88	51.57	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	4824.00	46.55	74.00	-27.45	53.46	35.78	8.88	51.57	---	---	Peak																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	4824.00	45.15	74.00	-28.85	52.06	35.78	8.88	51.57	---	---	Peak																																																																																			



Mode	18																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11n HT20_CH06_Full RU_2437MHz																																																																																																																							
ANT	8																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2024-10-01 300060009000120001500018000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>53.14</td><td>35.90</td><td>8.72</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>44.00</td><td>74.00</td><td>-30.00</td><td>48.10</td><td>36.88</td><td>10.18</td><td>51.16</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	46.21	74.00	-27.79	53.14	35.90	8.72	51.55	---	---	Peak	2	7311.00	44.00	74.00	-30.00	48.10	36.88	10.18	51.16	---	---	Peak	Level (dBuV/m) Date: 2024-10-01 300060009000120001500018000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>45.76</td><td>74.00</td><td>-28.24</td><td>52.69</td><td>35.90</td><td>8.72</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.88</td><td>74.00</td><td>-28.12</td><td>49.98</td><td>36.88</td><td>10.18</td><td>51.16</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	45.76	74.00	-28.24	52.69	35.90	8.72	51.55	---	---	Peak	2	7311.00	45.88	74.00	-28.12	49.98	36.88	10.18	51.16	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4874.00	46.21	74.00	-27.79	53.14	35.90	8.72	51.55	---	---	Peak																																																																																																													
2	7311.00	44.00	74.00	-30.00	48.10	36.88	10.18	51.16	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4874.00	45.76	74.00	-28.24	52.69	35.90	8.72	51.55	---	---	Peak																																																																																																													
2	7311.00	45.88	74.00	-28.12	49.98	36.88	10.18	51.16	---	---	Peak																																																																																																													





Mode	19																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n HT20_CH11_Full RU_2462MHz																																																																																	
ANT	8																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-30 1 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.85</td><td>57.38</td><td>74.00</td><td>-16.62</td><td>54.81</td><td>30.70</td><td>5.46</td><td>33.59</td><td>119</td><td>331</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.85	57.38	74.00	-16.62	54.81	30.70	5.46	33.59	119	331	PEAK	Level (dBuV/m) Date: 2024-09-30 1 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>93.82</td><td>-----</td><td>-----</td><td>91.25</td><td>30.71</td><td>5.43</td><td>33.57</td><td>119</td><td>331</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	93.82	-----	-----	91.25	30.71	5.43	33.57	119	331	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.85	57.38	74.00	-16.62	54.81	30.70	5.46	33.59	119	331	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	93.82	-----	-----	91.25	30.71	5.43	33.57	119	331	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2024-09-30 1 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.55</td><td>40.49</td><td>54.00</td><td>-13.51</td><td>37.92</td><td>30.70</td><td>5.46</td><td>33.59</td><td>119</td><td>331</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.55	40.49	54.00	-13.51	37.92	30.70	5.46	33.59	119	331	AVERAGE	Level (dBuV/m) Date: 2024-09-30 1 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>87.01</td><td>-----</td><td>-----</td><td>84.45</td><td>30.71</td><td>5.43</td><td>33.58</td><td>119</td><td>331</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	87.01	-----	-----	84.45	30.71	5.43	33.58	119	331	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.55	40.49	54.00	-13.51	37.92	30.70	5.46	33.59	119	331	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	87.01	-----	-----	84.45	30.71	5.43	33.58	119	331	AVERAGE																																																																							



Mode	19																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11n HT20_CH11_Full RU_2462MHz																																																																																									
ANT	8																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-30 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.19</td><td>57.70</td><td>74.00</td><td>-16.30</td><td>55.13</td><td>30.70</td><td>5.46</td><td>33.59</td><td>369 237 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.19	57.70	74.00	-16.30	55.13	30.70	5.46	33.59	369 237 PEAK	Level (dBuV/m) Date: 2024-09-30 PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>93.37</td><td>-----</td><td>-----</td><td>90.80</td><td>30.71</td><td>5.44</td><td>33.58</td><td>369 237 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	93.37	-----	-----	90.80	30.71	5.44	33.58	369 237 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2484.19	57.70	74.00	-16.30	55.13	30.70	5.46	33.59	369 237 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	93.37	-----	-----	90.80	30.71	5.44	33.58	369 237 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-09-30 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>40.90</td><td>54.00</td><td>-13.10</td><td>38.33</td><td>30.70</td><td>5.46</td><td>33.59</td><td>369 237 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	40.90	54.00	-13.10	38.33	30.70	5.46	33.59	369 237 AVERAGE	Level (dBuV/m) Date: 2024-09-30 AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>85.24</td><td>-----</td><td>-----</td><td>82.67</td><td>30.71</td><td>5.44</td><td>33.58</td><td>369 237 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	85.24	-----	-----	82.67	30.71	5.44	33.58	369 237 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.58	40.90	54.00	-13.10	38.33	30.70	5.46	33.59	369 237 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	85.24	-----	-----	82.67	30.71	5.44	33.58	369 237 AVERAGE																																																																																	

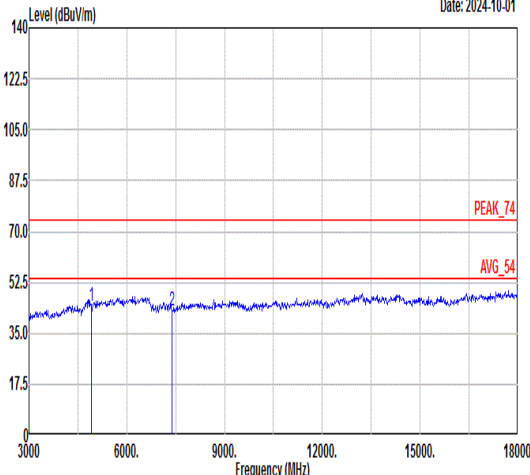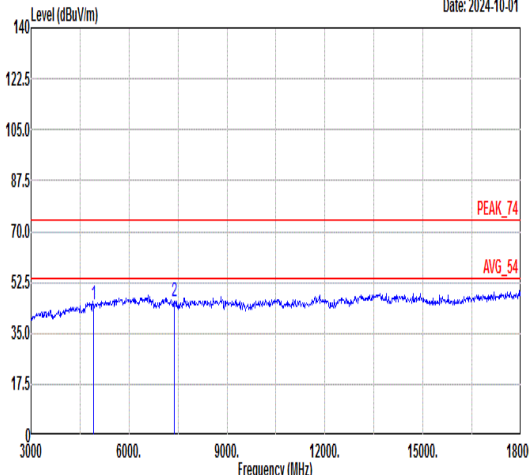

Mode	19																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11n HT20_CH11_Full RU_2462MHz																																																																																																																							
ANT	8																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	 Date: 2024-10-01						 Date: 2024-10-01																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>44.63</td><td>74.00</td><td>-29.37</td><td>51.57</td><td>36.02</td><td>8.57</td><td>51.53</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>42.94</td><td>74.00</td><td>-31.06</td><td>47.09</td><td>36.85</td><td>10.18</td><td>51.18</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	44.63	74.00	-29.37	51.57	36.02	8.57	51.53	---	---	Peak	2	7386.00	42.94	74.00	-31.06	47.09	36.85	10.18	51.18	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>45.07</td><td>74.00</td><td>-28.93</td><td>52.01</td><td>36.02</td><td>8.57</td><td>51.53</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.16</td><td>74.00</td><td>-27.84</td><td>50.31</td><td>36.85</td><td>10.18</td><td>51.18</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	45.07	74.00	-28.93	52.01	36.02	8.57	51.53	---	---	Peak	2	7386.00	46.16	74.00	-27.84	50.31	36.85	10.18	51.18	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	44.63	74.00	-29.37	51.57	36.02	8.57	51.53	---	---	Peak																																																																																																													
2	7386.00	42.94	74.00	-31.06	47.09	36.85	10.18	51.18	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	45.07	74.00	-28.93	52.01	36.02	8.57	51.53	---	---	Peak																																																																																																													
2	7386.00	46.16	74.00	-27.84	50.31	36.85	10.18	51.18	---	---	Peak																																																																																																													



		20																																																																																								
Mode		Band Edge - L																																																																																								
		2400-2483.5_802.11n HT40_CH03_Full RU_2422MHz																																																																																								
ANT		8																																																																																								
Pol.		Horizontal					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-10-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.63</td><td>56.57</td><td>74.00</td><td>-17.43</td><td>54.02</td><td>30.72</td><td>5.36</td><td>33.53</td><td>162 337 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.63	56.57	74.00	-17.43	54.02	30.72	5.36	33.53	162 337 PEAK	Level (dBuV/m) Date: 2024-10-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>93.70</td><td>-----</td><td>-----</td><td>91.15</td><td>30.71</td><td>5.40</td><td>33.56</td><td>162 337 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	93.70	-----	-----	91.15	30.71	5.40	33.56	162 337 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.63	56.57	74.00	-17.43	54.02	30.72	5.36	33.53	162 337 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2422.00	93.70	-----	-----	91.15	30.71	5.40	33.56	162 337 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-10-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.86</td><td>43.54</td><td>54.00</td><td>-10.46</td><td>40.99</td><td>30.72</td><td>5.36</td><td>33.53</td><td>162 337 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.86	43.54	54.00	-10.46	40.99	30.72	5.36	33.53	162 337 AVERAGE	Level (dBuV/m) Date: 2024-10-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>86.55</td><td>-----</td><td>-----</td><td>84.00</td><td>30.71</td><td>5.40</td><td>33.56</td><td>162 337 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	86.55	-----	-----	84.00	30.71	5.40	33.56	162 337 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.86	43.54	54.00	-10.46	40.99	30.72	5.36	33.53	162 337 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2422.00	86.55	-----	-----	84.00	30.71	5.40	33.56	162 337 AVERAGE																																																																																	







Mode	20																																										
	Band Edge - R																																										
	2400-2483.5_802.11n HT40_CH03_Full RU_2422MHz																																										
ANT	8																																										
Pol.	Horizontal					Fundamental																																					
Peak	Date: 2024-10-01 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.46</td><td>43.99</td><td>74.00</td><td>-30.01</td><td>41.41</td><td>30.70</td><td>5.47</td><td>33.59</td><td>162</td><td>337 PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2488.46	43.99	74.00	-30.01	41.41	30.70	5.47	33.59	162	337 PEAK	Blank				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																		
1	2488.46	43.99	74.00	-30.01	41.41	30.70	5.47	33.59	162	337 PEAK																																	
Avg	Date: 2024-10-01 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.14</td><td>34.29</td><td>54.00</td><td>-19.71</td><td>31.72</td><td>30.70</td><td>5.46</td><td>33.59</td><td>162</td><td>337 AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2488.14	34.29	54.00	-19.71	31.72	30.70	5.46	33.59	162	337 AVERAGE	Blank				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																		
1	2488.14	34.29	54.00	-19.71	31.72	30.70	5.46	33.59	162	337 AVERAGE																																	







Mode	20	
	Band Edge - L	
	2400-2483.5_802.11n HT40_CH03_Full RU_2422MHz	
ANT	8	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2024-10-01 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2389.86 53.93 74.00 -20.07 51.38 30.72 5.36 33.53 400 235 PEAK	Level (dBuV/m) Date: 2024-10-01 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2422.00 92.45 ----- 89.90 30.71 5.40 33.56 400 235 PEAK
	Level (dBuV/m) Date: 2024-10-01 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2389.52 41.37 54.00 -12.63 38.82 30.72 5.36 33.53 400 235 AVERAGE	Level (dBuV/m) Date: 2024-10-01 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2422.00 84.40 ----- 81.85 30.71 5.40 33.56 400 235 AVERAGE

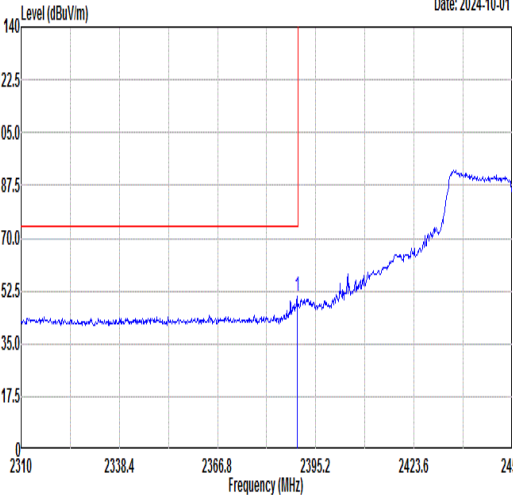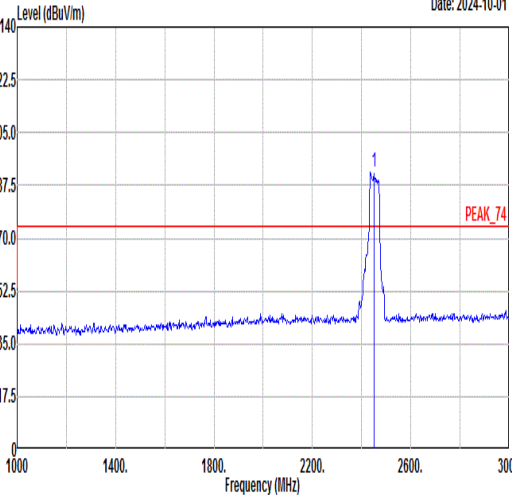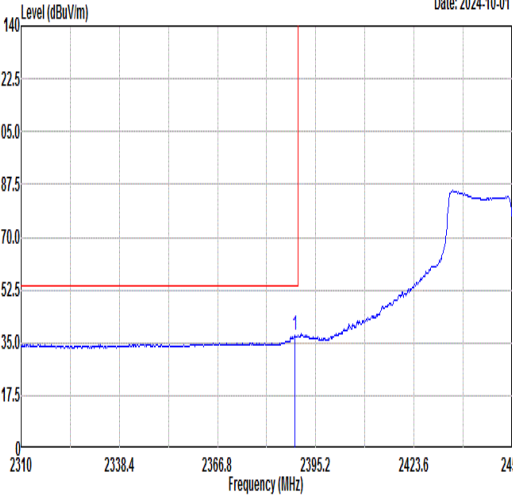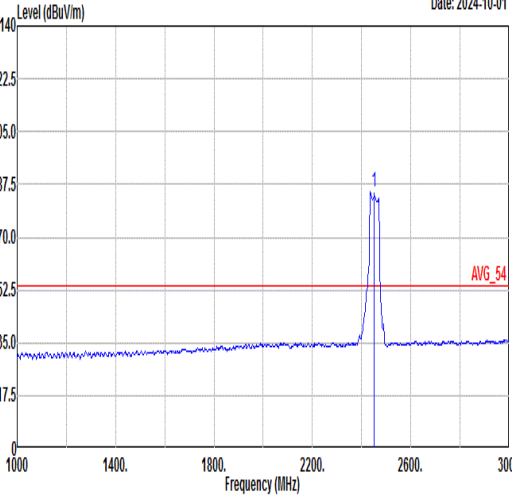

Mode	21																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																																																								
ANT	8																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak	 Level (dBuV/m) Date: 2024-10-01 Frequency (MHz)					 Level (dBuV/m) Date: 2024-10-01 Frequency (MHz)																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.80</td><td>50.80</td><td>74.00</td><td>-23.20</td><td>48.25</td><td>30.72</td><td>5.36</td><td>33.53</td><td>122</td><td>331 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.80	50.80	74.00	-23.20	48.25	30.72	5.36	33.53	122	331 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2452.00</td><td>91.98</td><td>-----</td><td>-----</td><td>89.42</td><td>30.71</td><td>5.41</td><td>33.56</td><td>122</td><td>331 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2452.00	91.98	-----	-----	89.42	30.71	5.41	33.56	122
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.80	50.80	74.00	-23.20	48.25	30.72	5.36	33.53	122	331 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2452.00	91.98	-----	-----	89.42	30.71	5.41	33.56	122	331 PEAK																																																																																
Avg	 Level (dBuV/m) Date: 2024-10-01 Frequency (MHz)					 Level (dBuV/m) Date: 2024-10-01 Frequency (MHz)																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.24</td><td>37.50</td><td>54.00</td><td>-16.50</td><td>34.95</td><td>30.72</td><td>5.36</td><td>33.53</td><td>122</td><td>331 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.24	37.50	54.00	-16.50	34.95	30.72	5.36	33.53	122	331 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2452.00</td><td>85.20</td><td>-----</td><td>-----</td><td>82.65</td><td>30.71</td><td>5.40</td><td>33.56</td><td>122</td><td>331 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2452.00	85.20	-----	-----	82.65	30.71	5.40	33.56	122
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.24	37.50	54.00	-16.50	34.95	30.72	5.36	33.53	122	331 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2452.00	85.20	-----	-----	82.65	30.71	5.40	33.56	122	331 AVERAGE																																																																																

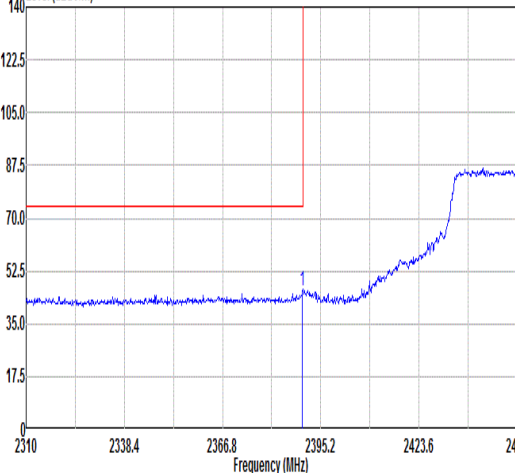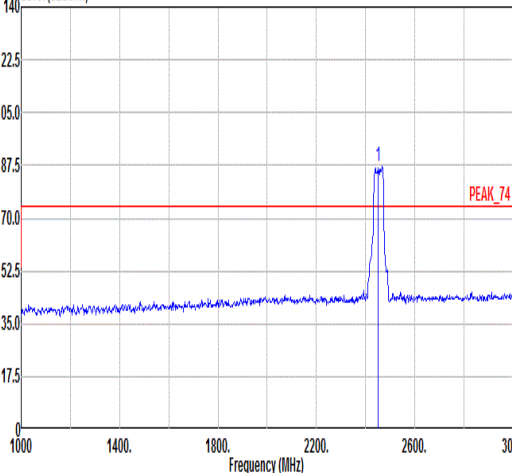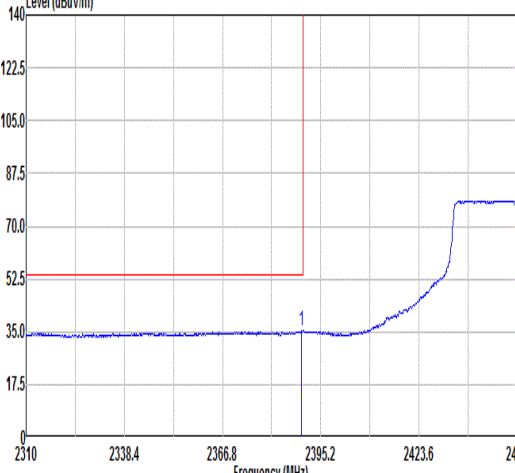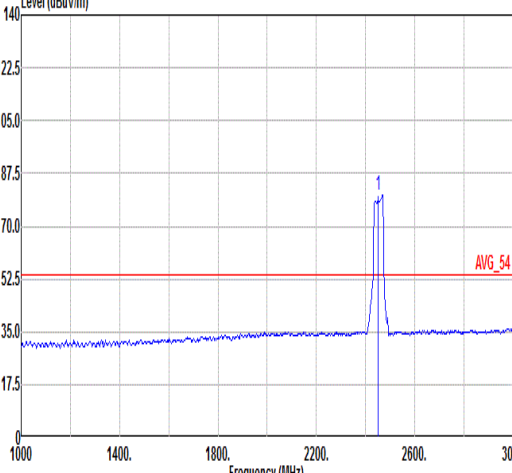

Mode	21																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																																																								
ANT	8																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-10-01 					Level (dBuV/m) Date: 2024-10-01 																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>46.20</td><td>74.00</td><td>-27.80</td><td>43.65</td><td>30.72</td><td>5.36</td><td>33.53</td><td>369 244 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	46.20	74.00	-27.80	43.65	30.72	5.36	33.53	369 244 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>87.16</td><td>-----</td><td>-----</td><td>84.59</td><td>30.71</td><td>5.44</td><td>33.58</td><td>369 244 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	87.16	-----	-----	84.59	30.71	5.44	33.58
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.95	46.20	74.00	-27.80	43.65	30.72	5.36	33.53	369 244 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2452.00	87.16	-----	-----	84.59	30.71	5.44	33.58	369 244 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2024-10-01 					Level (dBuV/m) Date: 2024-10-01 																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.66</td><td>35.15</td><td>54.00</td><td>-18.85</td><td>32.60</td><td>30.72</td><td>5.36</td><td>33.53</td><td>369 244 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.66	35.15	54.00	-18.85	32.60	30.72	5.36	33.53	369 244 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>80.37</td><td>-----</td><td>-----</td><td>77.80</td><td>30.71</td><td>5.44</td><td>33.58</td><td>369 244 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	80.37	-----	-----	77.80	30.71	5.44	33.58
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.66	35.15	54.00	-18.85	32.60	30.72	5.36	33.53	369 244 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2452.00	80.37	-----	-----	77.80	30.71	5.44	33.58	369 244 AVERAGE																																																																																



Mode	21																																										
	Band Edge - R																																										
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																										
ANT	8																																										
Pol.	Vertical					Fundamental																																					
Peak	Date: 2024-10-01 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2486.18</td><td>53.06</td><td>74.00</td><td>-20.94</td><td>50.49</td><td>30.70</td><td>5.46</td><td>33.59</td><td>369</td><td>244</td><td>PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2486.18	53.06	74.00	-20.94	50.49	30.70	5.46	33.59	369	244	PEAK	Blank				
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																		
1 2486.18	53.06	74.00	-20.94	50.49	30.70	5.46	33.59	369	244	PEAK																																	
Avg	Date: 2024-10-01 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2489.34</td><td>40.34</td><td>54.00</td><td>-13.66</td><td>37.76</td><td>30.70</td><td>5.47</td><td>33.59</td><td>369</td><td>244</td><td>AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2489.34	40.34	54.00	-13.66	37.76	30.70	5.47	33.59	369	244	AVERAGE	Blank				
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																		
1 2489.34	40.34	54.00	-13.66	37.76	30.70	5.47	33.59	369	244	AVERAGE																																	



Mode	22																																																																																																																																																																											
	LF																																																																																																																																																																											
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																																																																											
ANT	8																																																																																																																																																																											
Pol.	Horizontal					Vertical																																																																																																																																																																						
QPI/ Peak	Level (dBuV/m) Date: 2024-10-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>42.61</td><td>21.04</td><td>40.00</td><td>-18.96</td><td>36.07</td><td>19.37</td><td>0.63</td><td>35.03 --- Peak</td></tr><tr><td>2</td><td>192.96</td><td>23.29</td><td>43.50</td><td>-20.21</td><td>40.57</td><td>16.41</td><td>1.41</td><td>35.10 --- Peak</td></tr><tr><td>3</td><td>251.16</td><td>27.06</td><td>46.00</td><td>-18.94</td><td>42.80</td><td>17.61</td><td>1.65</td><td>35.00 --- Peak</td></tr><tr><td>4</td><td>312.27</td><td>28.86</td><td>46.00</td><td>-17.14</td><td>42.52</td><td>19.39</td><td>1.85</td><td>34.90 --- Peak</td></tr><tr><td>5</td><td>634.31</td><td>27.22</td><td>46.00</td><td>-18.78</td><td>32.90</td><td>26.20</td><td>2.62</td><td>34.50 --- Peak</td></tr><tr><td>6</td><td>800.18</td><td>31.23</td><td>46.00</td><td>-14.77</td><td>34.75</td><td>27.84</td><td>2.94</td><td>34.30 --- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	42.61	21.04	40.00	-18.96	36.07	19.37	0.63	35.03 --- Peak	2	192.96	23.29	43.50	-20.21	40.57	16.41	1.41	35.10 --- Peak	3	251.16	27.06	46.00	-18.94	42.80	17.61	1.65	35.00 --- Peak	4	312.27	28.86	46.00	-17.14	42.52	19.39	1.85	34.90 --- Peak	5	634.31	27.22	46.00	-18.78	32.90	26.20	2.62	34.50 --- Peak	6	800.18	31.23	46.00	-14.77	34.75	27.84	2.94	34.30 --- Peak	Level (dBuV/m) Date: 2024-10-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>41.64</td><td>32.24</td><td>40.00</td><td>-7.76</td><td>47.29</td><td>19.34</td><td>0.63</td><td>35.02 --- Peak</td></tr><tr><td>2</td><td>160.95</td><td>23.73</td><td>43.50</td><td>-19.77</td><td>39.21</td><td>18.33</td><td>1.29</td><td>35.10 --- Peak</td></tr><tr><td>3</td><td>191.99</td><td>24.94</td><td>43.50</td><td>-18.56</td><td>42.16</td><td>16.47</td><td>1.41</td><td>35.10 --- Peak</td></tr><tr><td>4</td><td>263.77</td><td>25.11</td><td>46.00</td><td>-20.89</td><td>40.39</td><td>18.00</td><td>1.69</td><td>34.97 --- Peak</td></tr><tr><td>5</td><td>524.70</td><td>25.87</td><td>46.00</td><td>-20.13</td><td>34.36</td><td>23.77</td><td>2.39</td><td>34.65 --- Peak</td></tr><tr><td>6</td><td>721.61</td><td>30.02</td><td>46.00</td><td>-15.98</td><td>34.37</td><td>27.31</td><td>2.80</td><td>34.46 --- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	41.64	32.24	40.00	-7.76	47.29	19.34	0.63	35.02 --- Peak	2	160.95	23.73	43.50	-19.77	39.21	18.33	1.29	35.10 --- Peak	3	191.99	24.94	43.50	-18.56	42.16	16.47	1.41	35.10 --- Peak	4	263.77	25.11	46.00	-20.89	40.39	18.00	1.69	34.97 --- Peak	5	524.70	25.87	46.00	-20.13	34.36	23.77	2.39	34.65 --- Peak	6	721.61	30.02	46.00	-15.98	34.37	27.31	2.80	34.46 --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																																																				
1	42.61	21.04	40.00	-18.96	36.07	19.37	0.63	35.03 --- Peak																																																																																																																																																																				
2	192.96	23.29	43.50	-20.21	40.57	16.41	1.41	35.10 --- Peak																																																																																																																																																																				
3	251.16	27.06	46.00	-18.94	42.80	17.61	1.65	35.00 --- Peak																																																																																																																																																																				
4	312.27	28.86	46.00	-17.14	42.52	19.39	1.85	34.90 --- Peak																																																																																																																																																																				
5	634.31	27.22	46.00	-18.78	32.90	26.20	2.62	34.50 --- Peak																																																																																																																																																																				
6	800.18	31.23	46.00	-14.77	34.75	27.84	2.94	34.30 --- Peak																																																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																																																				
1	41.64	32.24	40.00	-7.76	47.29	19.34	0.63	35.02 --- Peak																																																																																																																																																																				
2	160.95	23.73	43.50	-19.77	39.21	18.33	1.29	35.10 --- Peak																																																																																																																																																																				
3	191.99	24.94	43.50	-18.56	42.16	16.47	1.41	35.10 --- Peak																																																																																																																																																																				
4	263.77	25.11	46.00	-20.89	40.39	18.00	1.69	34.97 --- Peak																																																																																																																																																																				
5	524.70	25.87	46.00	-20.13	34.36	23.77	2.39	34.65 --- Peak																																																																																																																																																																				
6	721.61	30.02	46.00	-15.98	34.37	27.31	2.80	34.46 --- Peak																																																																																																																																																																				