

Test Report of FCC Part 15 C for FCC Certificate  
On Behalf of  
**Gholamali Malekpour**

**Product description:** Remote Control for Window Blinds

**Model No.:** DL-1051A

**FCC ID:** RA7- DL-1051A

**Prepared for:** Gholamali Malekpour

10531 4s Commons #166-411, San Diego, California 92127

**Prepared by:** Bontek Compliance Testing Laboratory Ltd

1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East  
Road, Nanshan, Shenzhen, China

Tel: 86-755-86337020

Fax: 86-755-86337028

**Report No.:** BCT12KR-2043E-1

**Issue Date:** April 13, 2013

**Test Date:** March 25~ April 7, 2013

**Test by:**

**Reviewed By:**

Lion Cai  
Lion Cai

Kevin Chi  
Kevin Chi

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 Product Description for Equipment Under Test (EUT).....	4
1.2 Test Standards.....	4
1.3 Test Facility.....	4
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
2.1 EUT Configuration .....	6
2.2 EUT Exercise .....	6
2.3 General Test Procedures .....	6
2.4 Measurement Uncertainty .....	6
2.5 Test Equipment List and Details.....	7
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>4. DISTURBANCE VOLTAGE AT THE MAINS TERMINALS.....</b>	<b>10</b>
4.1 Measurement Uncertainty .....	10
4.2 Applicable Standard.....	10
4.3 Test Description .....	10
<b>5. RADIATED DISTURBANCES.....</b>	<b>11</b>
5.1 Measurement Uncertainty .....	11
5.2 Limit of Radiated Disturbances .....	11
5.3 EUT Setup .....	11
5.4 Test Receiver Setup .....	12
5.5 Test Procedure .....	12
5.6 Corrected Amplitude & Margin Calculation .....	13
5.7 Field Strength Calculation .....	13
5.8 Radiated Emissions Test Result .....	13
<b>6. 20DB BANDWIDTH.....</b>	<b>16</b>
6.1 Measurement Uncertainty .....	16
6.2 Limit of 20dB Bandwidth.....	16
6.3 EUT Setup .....	16
6.4 Test Procedure .....	16
6.5 Emissions within Band Edges Test Result.....	17
<b>7. DUTY CYCLE.....</b>	<b>18</b>
7.1 Measurement Uncertainty .....	18
7.2 EUT Setup .....	18
7.3 Test Procedure .....	18
7.4 Measurement Result.....	18
<b>8. TRANSMISSION TIME.....</b>	<b>21</b>
8.1 Measurement Uncertainty .....	21

8.2 EUT Setup .....	21
8.3 Test Procedure .....	21
8.4 Limit of Transmission time .....	21
8.5 Transmission Time Test Result .....	21
<b>9. ANTENNA REQUIREMENT .....</b>	<b>23</b>
9.1 Standard Applicable .....	23
9.2 Antenna Connected Construction .....	23

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: **Gholamali Malekpour**  
Address of applicant: 10531 4s Commons #166-411, San Diego, California 92127  
Manufacturer: **Gholamali Malekpour**  
Address of manufacturer: 10531 4s Commons #166-411, San Diego, California 92127

#### General Description of E.U.T

Items	Description
EUT Description:	Remote Control for Window Blinds
Trade Name:	N/A
Model No.:	DL-1051A
Rated Voltage	DC 12V from Battery
Frequency range	433.92MHz
Number of channels	1
Channel Separation	None
Product Class:	Part 15 Security/Remote Control Transmitter

\* The test data gathered are from the production sample provided by the manufacturer.

### 1.2 Test Standards

The following Declaration of Conformity report of EUT is prepared in accordance with

#### FCC Rules and Regulations Part 15 Subpart C Section 15.231

The objective of the manufacturer is to demonstrate compliance with the described above standards.

### 1.3 Test Facility

All measurement required was performed at laboratory of Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China.

The test facility is recognized, certified, or accredited by the following organizations:

**FCC – Registration No.: 338263**

BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

**IC Registration No.: 7631A**

The 3m alternate test site of BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25, 2011.

**CNAS - Registration No.: L3923**

BONTEK COMPLIANCE TESTING LABORATORY LTD. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L3923, March 22, 2012.

**TUV - Registration No.: UA 50203122-0001**

BONTEK COMPLIANCE TESTING LABORATORY LTD. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-002.

## 2. SYSTEM TEST CONFIGURATION

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

### 2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

### 2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

## 2.5 Test Equipment List and Details

Test equipments list of Bontek Compliance Testing Laboratory Ltd.

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	BCT-EMC001	EMI Test Receiver	R&S	ESCI	100687	2012-4-17	2013-4-16
2	BCT-EMC002	EMI Test Receiver	R&S	ESPI	100097	2012-11-1	2013-10-31
3	BCT-EMC003	Amplifier	HP	8447D	1937A02492	2012-4-20	2013-4-19
4	BCT-EMC004	Single Power Conductor Module	R&S	NNBM 8124	242	2012-4-20	2013-4-19
5	BCT-EMC005	Single Power Conductor Module	R&S	NNBM 8124	243	2012-4-20	2013-4-19
6	BCT-EMC006	Power Clamp	SCHWARZBECK	MDS-21	3812	2012-11-5	2013-11-4
7	BCT-EMC007	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
8	BCT-EMC008	Electrostatic Discharge Simulator	TESEQ	NSG437	125	2012-11-2	2013-11-1
9	BCT-EMC009	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2012-4-17	2013-4-16
10	BCT-EMC010	Fast Transient Noise Simulator	Noiseken	FNS-105AX	10501	2012-6-26	2013-6-25
11	BCT-EMC011	Color TV Pattern Generator	PHILIPS	PM5418	TM209947	N/A	N/A
12	BCT-EMC012	Power Frequency Magnetic Field Generator	EVERFINE	EMS61000-8K	608002	2012-4-17	2013-4-16
14	BCT-EMC014	Capacitive Coupling Clamp	TESEQ	CDN8014	25096	2012-4-17	2013-4-16
15	BCT-EMC015	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	166	2011-11-28	2013-11-27
16	BCT-EMC016	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	811	2011-11-28	2013-11-27
17	BCT-EMC017	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	304	2011-11-28	2013-11-27
18	BCT-EMC018	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2012-5-19	2014-5-18
19	BCT-EMC019	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2011-11-28	2013-11-27
20	BCT-EMC020	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	8128247	2012-11-1	2013-10-31
21	BCT-EMC021	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2012-11-15	2013-11-14
22	BCT-EMC022	Electric bridge	Jhai	JK2812C	803024	N/A	N/A
23	BCT-EMC026	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2012-4-17	2013-4-16
24	BCT-EMC027	CDN	FRANKONIA	CDN M2+M3	A3027019	2012-4-17	2013-4-16

25	BCT-EMC029	6DB Attenuator	FRANKONIA	N/A	1001698	2012-4-17	2013-4-16
26	BCT-EMC030	EM Injection clamp	FCC	F-203I-23mm	091536	2012-4-17	2013-4-16
27	BCT-EMC031	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2012-4-17	2013-4-16
28	BCT-EMC032	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2012-4-17	2013-4-16
29	BCT-EMC033	ISN	TESEQ	ISN-T800	30301	2012-11-15	2013-11-14
30	BCT-EMC034	10KV surge generator	SANKI	SKS-0510M	048110003E 321	2012-11-01	2013-10-31
31	BCT-EMC035	HRMONICS&FLICK RE ANALYSER	VOLTECH	PM6000	200006700433	2012-11-20	2013-11-19
32	BCT-EMC036	Spectrum Analyzer	R&S	FSP	100397	2012-11-1	2013-10-31
33	BCT-EMC037	Broadband preamplifier	SCH WARZBECK	BBV9718	9718-182	2012-4-20	2013-4-19

### 3. SUMMARY OF TEST RESULTS

Standard	Test Items	Status	Application
Part 15 Subpart C Section 15.231	Disturbance Voltage at The Mains Terminals	x	N/A, without AC power supply
	Radiation Emission	✓	
	20dB Bandwidth	✓	
	Duty Cycle	✓	
	Transmission time	✓	
	Antennal requirement	✓	

✓ Indicates that the test is applicable  
x Indicates that the test is not applicable

## 4. DISTURBANCE VOLTAGE AT THE MAINS TERMINALS

### 4.1 Measurement Uncertainty

All test results complied with Section 15.207 requirements. Measurement Uncertainty is 2.4 dB.

### 4.2 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits ( dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

### 4.3 Test Description

The EUT is excused from investigation of Disturbance Voltage at The Mains Terminals, for it is powered by a DC 3V battery. According to the Section 15.207(d), measurement to demonstrate compliance with the limits of Disturbance Voltage at The Mains Terminals are not required to the devices which only employed battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

## 5. RADIATED DISTURBANCES

### 5.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ±3.4 dB.

### 5.2 Limit of Radiated Disturbances

According to 15.231(b), In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental		Field Strength of Spurious	
	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)
40.66 - 40.70	67.04	2,250	47.04	225
70 - 130	61.94	1,250	41.94	125
130 - 174	* 61.94 - 71.48	* 1,250 - 3,750	* 41.94 - 51.48	* 125 - 375
174 - 260	71.48	3,750	51.48	375
260 - 470	* 71.48 - 81.94	* 3,750 - 12,500	* 51.48 - 61.94	* 375 - 1,250
above 470	81.94	12,500	61.94	1,250

\*\* linear interpolations

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters =  $56.81818(F) - 6136.3636$ ; for band 260-470 MHz, uV/m at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

### 5.3 EUT Setup

The radiated emission tests were performed in the in the 3-meter anechoic chamber, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15 Subpart B limits.

The EUT was placed on the center of the test table. In the frequency range below 1 GHz, Ultra-Broadband Antenna horn-antenna is used. In the frequency range above 1 GHz horn-antenna is used. Test setup refer to Section 2.4 Basic Test Setup Block Diagram of this report.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

#### **5.4 Test Receiver Setup**

According to FCC Part 15 rule, the frequency was investigated from 30 to 4000 MHz. During the radiated emission test, the test receiver was set with the following configurations:

Test Receiver Setting for frequency range below 1000MHz:

Detector.....	Peak & Quasi-Peak
IF Band Width.....	100KHz
Frequency Range.....	30MHz to 1000MHz
Turntable Rotated.....	0 to 360 degrees

Test Receiver Setting for frequency range above 1000MHz:

Detector.....	Peak
IF Band Width.....	1MHz
Frequency Range.....	1000MHz to 4000MHz
Turntable Rotated.....	0 to 360 degrees

Antenna Position:

Height.....	1m to 4m
Polarity.....	Horizontal and Vertical

#### **5.5 Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

- 1). Configure the EUT according to ANSI C63.4:2009.
- 2). The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3). The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 4). Power on the EUT and all the supporting units.
- 5). The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 6). The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
- 7). For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 8). Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode. Then all data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -10 dB $\mu$ V of specification limits), and are distinguished with a "QP" in the data plots.

## 5.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude Indicated reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Transd.}$$

$$\text{Transd.} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-7\text{dB}\mu\text{V}$  means the emission is  $7\text{dB}\mu\text{V}$  below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 5.7 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\text{Average Value} = \text{Peak Value} + \text{Duty Cycle Correction Factor}$$

$$\text{The Duty Cycle} = (0.46 * 16 + 1.5 * 7) / 58.8 = 30.37\%$$

Then the Duty Cycle Correction Factor derived from the 30.37% is:  $20 \log 30.37 = -10.35\text{dB}$   
This value is used to adjust the average corrected value.

## 5.8 Radiated Emissions Test Result

Temperature ( °C ) : 22~23	EUT: Remote Control for Window Blinds
Humidity (%RH ) : 50~54	M/N: DL-1051A
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Transmitting

433.94 MHz Tx in operation										
Maximum Frequency (MHz)	Emission Position and Level						Limit		Margin	
	Polarity	m	Deg°	Transd	Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)	Peak (dB $\mu$ V/m)	AVQP (dB $\mu$ V/m)	Peak (dB)	AVQP (dB)
47.46	V	1.5	157	15.8	28.02	17.67	80.82	60.82	52.8	43.15
55.22	V	1.4	95	15.6	23.15	12.8	80.82	60.82	57.67	48.02
99.84	V	1.4	206	17.3	25.36	15.01	80.82	60.82	55.46	45.81
295.78	V	1.6	65	17.9	26.85	16.5	80.82	60.82	53.97	44.32
433.92	V	1.2	155	22	57.65	47.3	100.82	80.82	43.17	33.52
868.08	V	1.3	85	28.8	46.35	36	80.82	60.82	34.47	24.82
1302.38	V	1.3	85	24.1	34.33	23.98	74.00*	54.00*	50.02	30.02
1735.96	V	1.4	73	23.4	31.33	20.98	80.82	60.82	49.49	39.84
2169.95	V	---	---	---	---	---	80.82	60.82	---	
2603.94	V	---	---	---	---	---	80.82	60.82	---	
3037.93	V	---	---	---	---	---	80.82	60.82	---	
3471.92	V	---	---	---	---	---	80.82	60.82	---	
3905.91	V	---	---	---	---	---	80.82	60.82	---	
4339.91	V	---	---	---	---	---	80.82	60.82	---	

Remark:

(1) In this testing, the EUT was respectively tested in three different orientations. That is:

- (1) EUT was lie vertically, and then its Antenna oriented upward
- (2) EUT was lie vertically, and then its Antenna oriented downward
- (3) EUT was lie flatwise, and then its Antenna oriented to the receiving antenna

When the EUT was lie flatwise, and its Antenna oriented to the receiving antenna, the worst test data was got as following table.

(2) Measuring frequencies from 30 MHz to the 10th harmonic of fundamental frequency of 433.94 MHz.

(3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) \* denotes spurious frequency which falls within the Restricted Bands specified in provision of § 15.205, then the general radiated emission limits in § 15.209 apply.

(5) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 8GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms

433.94 MHz Tx in operation										
Maximum Frequency (MHz)	Emission Position and Level						Limit		Margin	
	Polarity	m	Deg °	Transd	Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)	Peak (dB $\mu$ V/m)	AV\QP (dB $\mu$ V/m)	Peak (dB)	AV\QP (dB)
47.46	H	1.3	155	15.8	25.21	14.86	80.82	60.82	55.61	45.96
55.22	H	1.5	179	15.6	23.15	12.8	80.82	60.82	57.67	48.02
101.78	H	1.6	85	17.3	24.2	13.85	80.82	60.82	56.62	46.97
274.44	H	1.1	24	17.9	26.35	16		46*		30
433.92	H	1.4	136	22	58.35	48	100.82	80.82	42.47	32.82
868.08	H	1.7	91	28.8	45.01	34.66	80.82	60.82	35.81	26.16
1301.84	H	1.8	93	24.1	33.32	22.97	74.00*	54.00*	40.68	31.03
1745.62	H	1.3	105	23.4	31.89	21.54	80.82	60.82	48.93	39.28
2169.95	H	---	---	---	---	---	80.82	60.82	---	
2603.94	H	---	---	---	---	---	80.82	60.82	---	
3037.93	H	---	---	---	---	---	80.82	60.82	---	
3471.92	H	---	---	---	---	---	80.82	60.82	---	
3905.91	H	---	---	---	---	---	80.82	60.82	---	
4339.91	H	---	---	---	---	---	80.82	60.82	---	

Remark:

(1) In this testing, the EUT was respectively tested in three different orientations. That is:

- (1) EUT was lie vertically, and then its Antenna oriented upward
- (2) EUT was lie vertically, and then its Antenna oriented downward
- (3) EUT was lie flatwise, and then its Antenna oriented to the receiving antenna

When the EUT was lie flatwise, and its Antenna oriented to the receiving antenna, the worst test data was got as following table.

(2) Measuring frequencies from 30 MHz to the 10th harmonic of fundamental frequency of 433.94 MHz.

(3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) \* denotes spurious frequency which falls within the Restricted Bands specified in provision of § 15.205, then the general radiated emission limits in § 15.209 apply.

(5) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 8GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms

## 6. 20dB BANDWIDTH

### 6.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ±3.4 dB.

### 6.2 Limit of 20dB Bandwidth

In accordance with Part15.231(c), the fundamental frequency bandwidth was kept within 0.25% of the center frequency for devices operating >70MHz and <900MHz.

Fundamental Frequency (MHz)	Limit of 20dB Bandwidth (kHz)
433.946	433946x0.0025=1084.87

### 6.3 EUT Setup

The radiated emission tests were performed in the in the 3-meter anechoic chamber, using the setup accordance with the ANSI C63.4-2009.

The EUT was placed on the center of the nonmetal table which is 0.8 meter above a grounded turntable. The turntable can rotate 360 degrees to determine the azimuth of the maximum emission level.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

### 6.4 Test Procedure

- 1) Turn on the transmitter, and set it to transmit the pulse train continuously.
- 2) Set Test Receiver into spectrum analyzer mode, Tune the spectrum analyzer to the transmitter carrier frequency, and set the spectrum analyzer resolution bandwidth(RBW) to 100kHz and video bandwidth(VBW) to 100kHz, then select Peak function to scan the channel frequency.
- 3) The 20dB bandwidth was measured and recorded.


Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

## 6.5 Emissions within Band Edges Test Result

Temperature ( °C ) : 22~23	EUT: Remote Control for Window Blinds
Humidity (%RH) : 50~54	M/N: DL-1051A
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Transmitting

Test plots see following pages

Fundamental Frequency (MHz)	20dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/Fail
433.946	344	1084.87	Pass

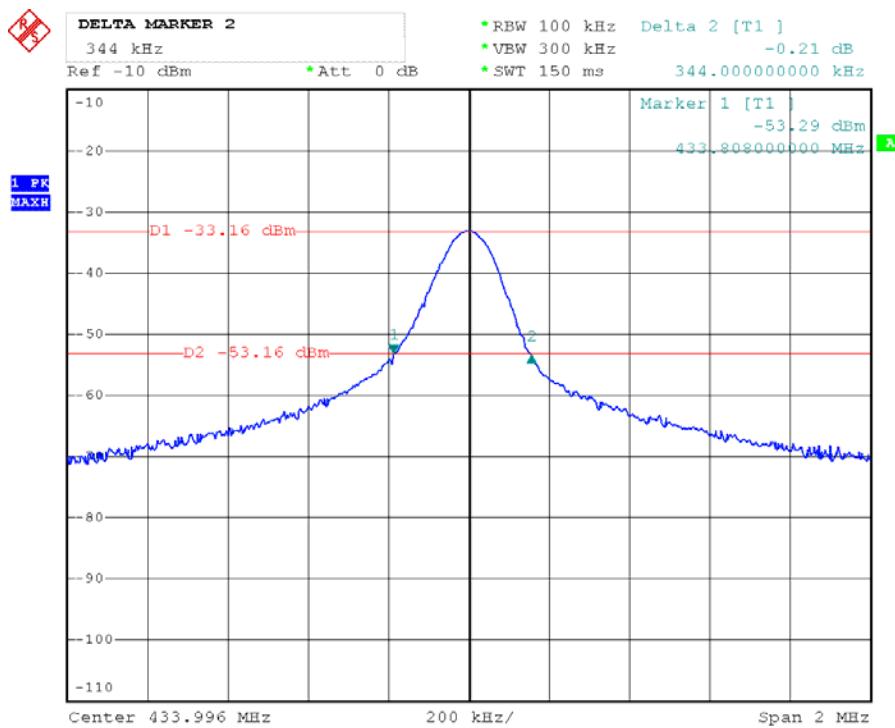

## 7. Duty Cycle

### 7.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ±3.4 dB.

### 7.2 EUT Setup

The radiated emission tests were performed in the in the 3-meter anechoic chamber, using the setup accordance with the ANSI C63.4-2009

The EUT was placed on the center of the nonmetal table which is 0.8 meter above a grounded turntable. The turntable can rotate 360 degrees to determine the azimuth of the maximum emission level.

### 7.3 Test Procedure



- 1) The EUT was placed on a turntable which is 0.8m above ground plane.
- 2) Set EUT operating in continuous transmitting mode
- 3) Set Test Receiver into spectrum analyzer mode, Tune the spectrum analyzer to the transmitter carrier frequency, and set the spectrum analyzer resolution bandwidth(RBW) to 1000kHz and video bandwidth(VBW) to 1000kHz, Span was set to 0Hz.
- 4) The Duty Cycle was measured and recorded.


### 7.4 Measurement Result

Temperature ( °C ) : 22~23	EUT: Remote Control for Window Blinds
Humidity (%RH ): 50~54	M/N: DL-1051A
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Transmitting

The Duty Cycle=  $(0.46 * 16 + 1.5 * 7) / 58.8 = 30.37\%$

Then the Duty Cycle Correction Factor derived from the 30.37% is:  $20 \log 30.37 = -10.35 \text{dB}$   
This value is used to adjust the average corrected value.

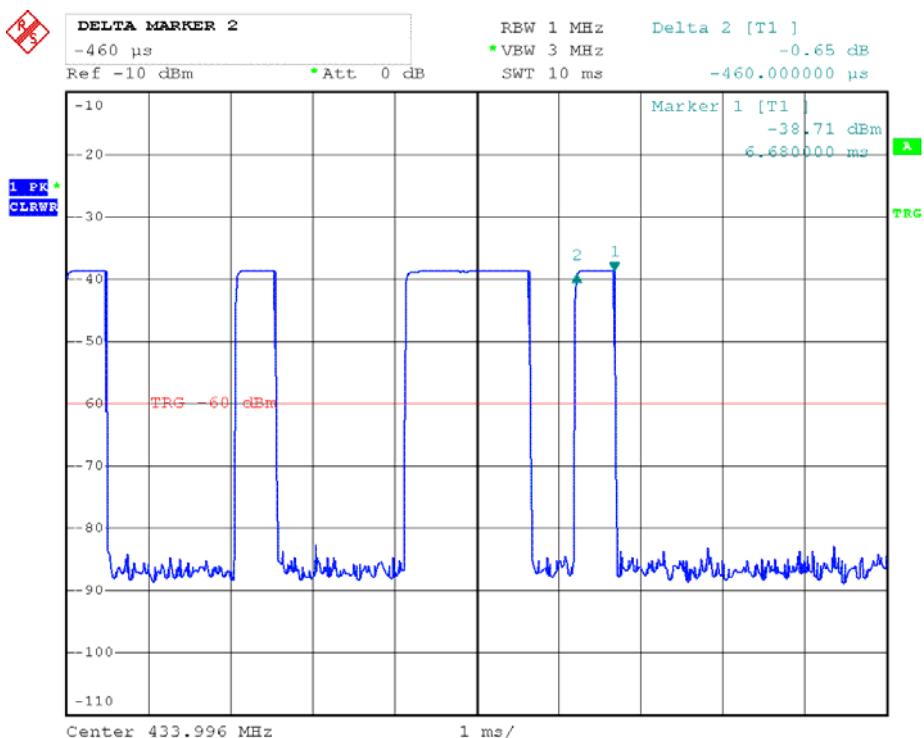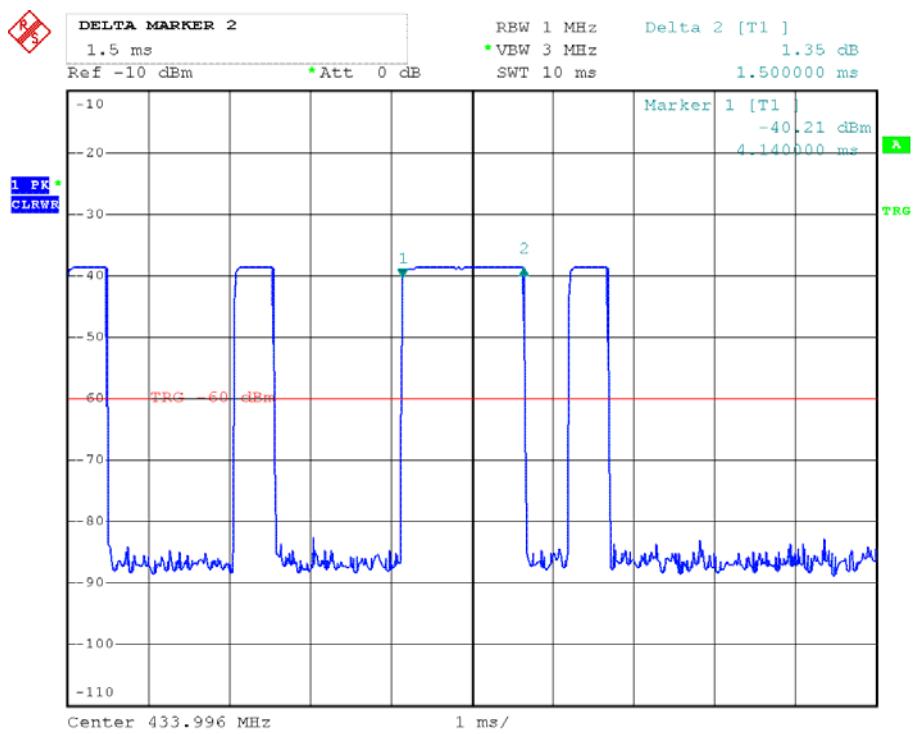

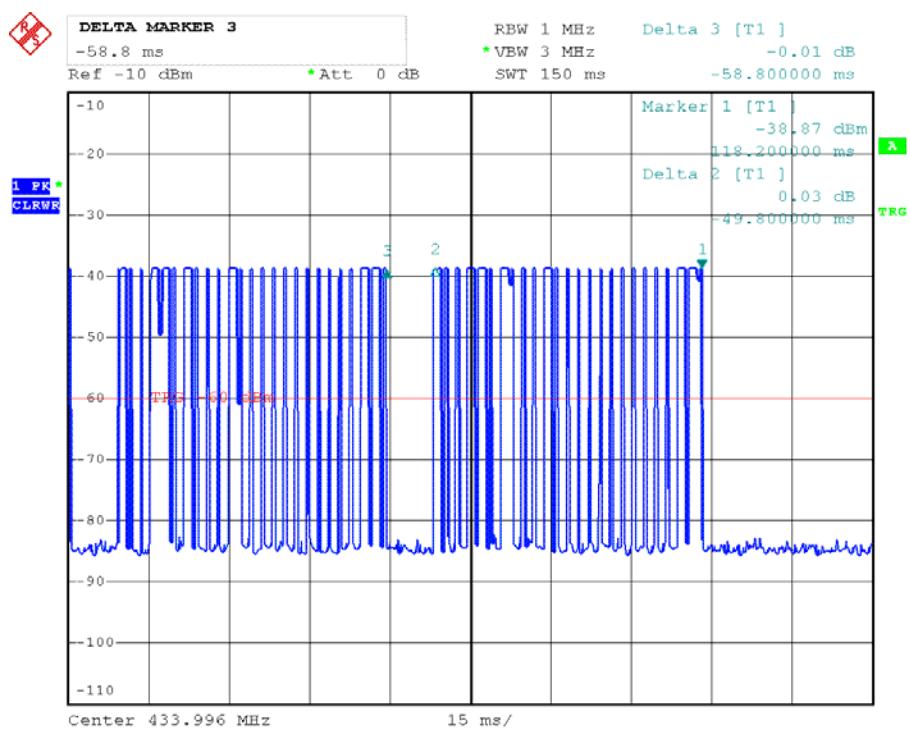

## 8. Transmission Time

### 8.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is +3.4 dB.

### 8.2 EUT Setup

The radiated emission tests were performed in the in the 3-meter anechoic chamber, using the setup accordance with the ANSI C63.4-2009.

The EUT was placed on the center of the nonmetal table which is 0.8 meter above a grounded turntable. The turntable can rotate 360 degrees to determine the azimuth of the maximum emission level.

### 8.3 Test Procedure

- 3) The EUT was placed on a turntable which is 0.8m above ground plane.
- 4) Set EUT operating in continuous transmitting mode
- 3) Set Test Receiver into spectrum analyzer mode, Tune the spectrum analyzer to the transmitter carrier frequency, and set the spectrum analyzer resolution bandwidth(RBW) to 1000kHz and video bandwidth(VBW) to 1000kHz, Span was set to 0Hz.
- 5) The Transmission time was measured and recorded.

### 8.4 Limit of Transmission time

In accordance with Part15.231(a)(2), A transmitter activated automatically shall cease transmission within 5 seconds after activation


Fundamental Frequency (MHz)	Limit of Transmission (S)
433.946	5

### 8.5 Transmission Time Test Result

Temperature ( °C ) : 22~23	EUT: Remote Control for Window Blinds
Humidity (%RH ): 50~54	M/N: DL-1051A
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Transmitting

Test plots see following pages

Fundamental Frequency (MHz)	Transmission time (S)	Maximum Limit (S)	Pass/Fail
433.92	2.72	5	Pass

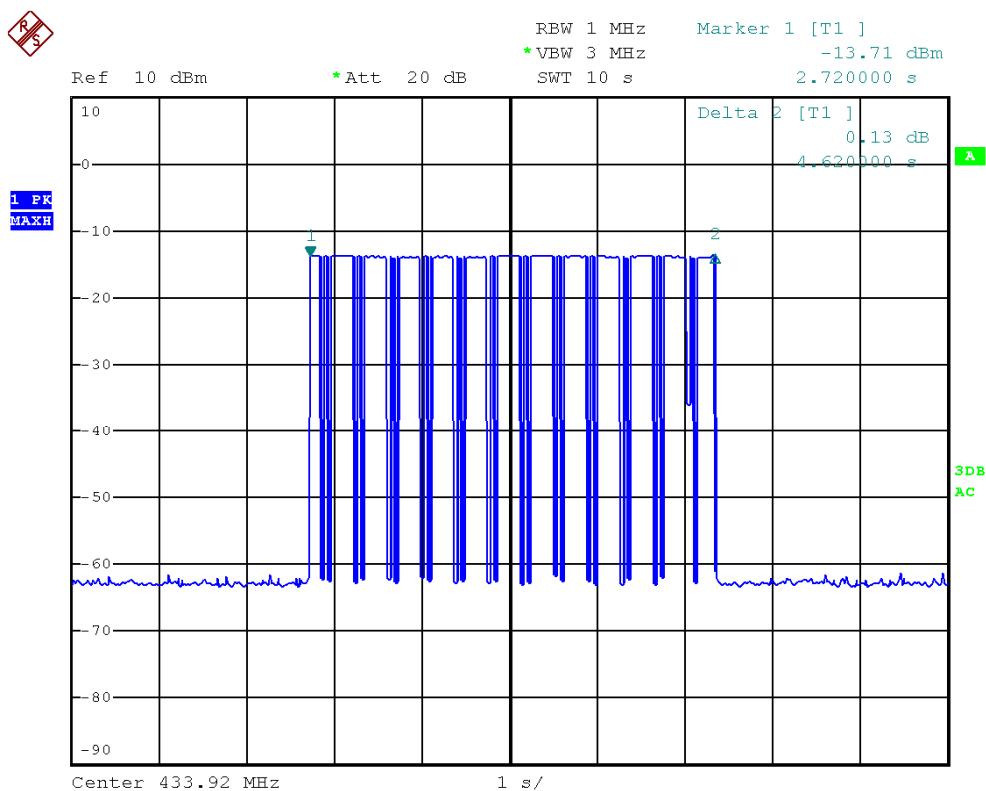

## **9. ANTENNA REQUIREMENT**

### **9.1 Standard Applicable**

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **9.2 Antenna Connected Construction**

The antenna connector is designed with permanent attachment and no consideration of replacement.