



SAR TEST REPORT

No. 2013SAR00099

For

TCT Mobile Limited

HSDPA/HSUPA/UMTS Tri bands / GSM quad bands/LTE Quin bands mobile phone

Mode Name: VIPER LTE

Marketing Name: ONE TOUCH 7030Y

With

Hardware Version: PIO

Software Version: VA30

FCC ID: RAD357

Issued Date: 2013-07-24



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of MIIT

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

Revision Version

Report Number	Revision	Date	Memo
2013SAR00099	00	2013-07-24	Initial creation of test report

TABLE OF CONTENT

1 TEST LABORATORY	5
1.1 TESTING LOCATION	5
1.2 TESTING ENVIRONMENT.....	5
1.3 PROJECT DATA	5
1.4 SIGNATURE.....	5
2 STATEMENT OF COMPLIANCE	6
3 CLIENT INFORMATION.....	8
3.1 APPLICANT INFORMATION	8
3.2 MANUFACTURER INFORMATION	8
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
4.1 ABOUT EUT	9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	9
5 TEST METHODOLOGY	10
5.1 APPLICABLE LIMIT REGULATIONS	10
5.2 APPLICABLE MEASUREMENT STANDARDS.....	10
6 SPECIFIC ABSORPTION RATE (SAR).....	11
6.1 INTRODUCTION.....	11
6.2 SAR DEFINITION	11
7 TISSUE SIMULATING LIQUIDS	12
7.1 TARGETS FOR TISSUE SIMULATING LIQUID	12
7.2 DIELECTRIC PERFORMANCE	12
8 SYSTEM VERIFICATION.....	19
8.1 SYSTEM SETUP.....	19
8.2 SYSTEM VERIFICATION.....	20
9 MEASUREMENT PROCEDURES	21
9.1 TESTS TO BE PERFORMED	21
9.2 GENERAL MEASUREMENT PROCEDURE.....	23
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR	24
9.4 SAR MEASUREMENT FOR LTE.....	24
9.5 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR	25
9.6 POWER DRIFT.....	25
10 AREA SCAN BASED 1-G SAR	26
10.1 REQUIREMENT OF KDB.....	26
10.2 FAST SAR ALGORITHMS	26
11 CONDUCTED OUTPUT POWER.....	27

11.1 MANUFACTURING TOLERANCE	27
11.2 GSM MEASUREMENT RESULT	31
11.3 WCDMA MEASUREMENT RESULT	32
11.4 LTE MEASUREMENT RESULT	32
11.5 WI-FI AND BT MEASUREMENT RESULT	42
12 SIMULTANEOUS TX SAR CONSIDERATIONS	44
12.1 INTRODUCTION.....	44
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES	44
12.3 SAR MEASUREMENT POSITIONS	44
12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	45
13 EVALUATION OF SIMULTANEOUS.....	46
14 SAR TEST RESULT	47
14.1 THE EVALUATION OF MULTI-BATTERIES	47
14.2 SAR RESULTS FOR FAST SAR.....	48
14.3 SAR RESULTS FOR STANDARD PROCEDURE	58
15 SAR MEASUREMENT VARIABILITY.....	63
16 MEASUREMENT UNCERTAINTY	64
17 MAIN TEST INSTRUMENTS	68
ANNEX A GRAPH RESULTS.....	69
ANNEX B SYSTEM VERIFICATION RESULTS.....	113
ANNEX C SAR MEASUREMENT SETUP	126
ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	132
ANNEX E EQUIVALENT MEDIA RECIPES	135
ANNEX F SYSTEM VALIDATION	136
ANNEX G PROBE CALIBRATION CERTIFICATE	137
ANNEX H DIPOLE CALIBRATION CERTIFICATE.....	148
ANNEX I DIPOLE QUALIFICATION FOR THE EXTENDED 3-YEAR CALIBRATION INTERVAL	201

1 Test Laboratory

1.1 Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing, P.R.China
Postal Code: 100191
Telephone: +86-10-62304633
Fax: +86-10-62304793

1.2 Testing Environment

Temperature: 18°C~25 °C,
Relative humidity: 30%~ 70%
Ground system resistance: < 0.5 Ω
Ambient noise & Reflection: < 0.012 W/kg


1.3 Project Data

Project Leader: Qi Dianyuan
Test Engineer: Lin Xiaojun
Testing Start Date: July 5, 2013
Testing End Date: July 16, 2013

1.4 Signature



Lin Xiaojun
(Prepared this test report)

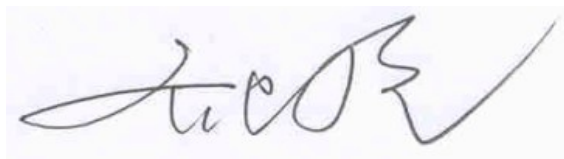

Qi Dianyuan
(Reviewed this test report)



Xiao Li
Deputy Director of the laboratory
(Approved this test report)

2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for TCT Mobile Limited HSDPA/HSUPA/UMTS Tri bands / GSM quad bands/LTE quin bands mobile phone VIPER LTE / ONE TOUCH 7030Y are as follows:

Table 2.1: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g (W/Kg)	Equipment Class
Head (Separation Distance 0mm)	GSM 850	0.30	PCE
	PCS 1900	0.23	
	UMTS FDD 2	0.54	
	UMTS FDD 5	0.57	
	LTE Band 2	0.61	
	LTE Band 4	0.42	
	LTE Band 5	0.49	
	LTE Band 17	0.33	
	WLAN 2.4 GHz	0.29	DTS
	WLAN 5.0 GHz	0.11	NII
Body-worn (Separation Distance 10mm)	GSM 850	1.03	PCE
	PCS 1900	0.82	
	UMTS FDD 2	1.00	
	UMTS FDD 5	0.90	
	LTE Band 2	1.25	
	LTE Band 4	1.07	
	LTE Band 5	0.74	
	LTE Band 17	0.65	
	WLAN 2.4 GHz	0.29	DTS
	WLAN 5.0 GHz	0.26	NII

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of (**Table 2.1**), and the values are: **1.25 W/kg (1g)**.

Table 2.2: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.61	0.22	0.83
	Right hand, Touch cheek	0.57	0.29	0.86
Highest reported SAR value for Body	Rear	1.07	0.29	1.36
	Bottom	1.25	/	/

Table 2.3: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.61	0.10	0.71
	Right hand, Touch cheek	0.57	0.10	0.67
Highest reported SAR value for Body	Rear	1.07	0.10	1.17
	Bottom	1.25	0.10	1.35

BT* - Estimated SAR for Bluetooth (see the table 13.3)

According to the above tables, the highest sum of reported SAR values is **1.36 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.

3 Client Information

3.1 Applicant Information

Company Name:	TCT Mobile Limited
Address /Post:	5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203
City:	ShangHai
Postal Code:	201203
Country:	P.R.China
Contact:	Gong Zhizhou
Email:	zhizhou.gong@jrdcom.com
Telephone:	0086-21-61460890
Fax:	0086-21-61460602

3.2 Manufacturer Information

Company Name:	TCT Mobile Limited
Address /Post:	5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203
City:	ShangHai
Postal Code:	201203
Country:	P.R.China
Contact:	Gong Zhizhou
Email:	zhizhou.gong@jrdcom.com
Telephone:	0086-21-61460890
Fax:	0086-21-61460602

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	HSDPA/HSUPA/UMTS Tri bands / GSM quad bands/LTE quin bands mobile phone
Mode Name:	VIPER LTE
Marketing Name:	ONE TOUCH 7030Y
Operating mode(s):	GSM 850/900/1800/1900, WCDMA 850/1900/2100 BT, Wi-Fi (2.4G&5G), LTE Band /2/4/5/17
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850)
	1850.2 – 1910 MHz (GSM 1900)
	826.4–846.6 MHz (WCDMA850 Band V)
	1852.4–1907.6 MHz (WCDMA1900 Band II)
	1860 – 1900 MHz (LTE Band 2)
	1720 – 1745 MHz (LTE Band 4)
	829 – 844 MHz (LTE Band 5)
	709 – 711 MHz (LTE Band 17)
	2412 – 2462 MHz (Wi-Fi 2.4G)
	5180 – 5825 MHz (Wi-Fi 5G)
GPRS/EGPRS Multislot Class:	10
GPRS capability Class:	B
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-worn configurations:	Headset
Hotspot mode:	Support simultaneous transmission of hotspot and voice(or data)
Form factor:	134 mm × 69.6 mm

4.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	013580000100442	PIO	VA30
EUT2	013580000100566	PIO	VA30
EUT3	013580000100582	PIO	VA30

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1&2 and conducted power with the EUT3.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	TLi022A1	/	BYD
AE2	Battery	TLi022A2	/	SCUD
AE3	Headset	CCB3160A11C1	/	Juwei

*AE ID: is used to identify the test sample in the lab internally.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

KDB447498 D01: General RF Exposure Guidance v05: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 SAR Handsets Multi Xmitter and Ant v01: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D05 SAR for LTE Devices v02: SAR Evaluation Considerations for LTE Devices

KDB941225 D06 Hot Spot SAR v01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB248227: SAR measurement procedures for 802.112abg transmitters

KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01: SAR Measurement Requirements for 100 MHz to 6 GHz

KDB 865664 D02 SAR Reporting v01: RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


Frequency (MHz)	Liquid Type	Conductivity (σ)	$\pm 5\%$ Range	Permittivity (ϵ)	$\pm 5\%$ Range
750	Head	0.89	0.85~0.93	41.94	39.8~44.0
750	Body	0.96	0.91~1.01	55.5	52.7~58.3
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1750	Head	1.37	1.30~1.44	40.08	38.1~42.1
1750	Body	1.49	1.42~1.56	53.4	50.7~56.1
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3
5800	Head	5.27	5.01~5.53	35.3	33.5~37.1
5800	Body	6.00	5.70~6.30	48.2	45.8~50.6

7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2013-07-12	Head	750 MHz	42.86	2.19	0.882	-0.90
	Body	750 MHz	54.97	-0.95	0.978	1.88
2013-07-13	Head	835 MHz	42.35	2.05	0.916	1.78
	Body	835 MHz	54.58	-1.12	0.964	-0.62
2013-07-14	Head	1750 MHz	40.49	1.02	1.377	0.51
	Body	1750 MHz	53.91	0.96	1.506	1.07
2013-07-15	Head	1900 MHz	39.29	-1.78	1.414	1.00
	Body	1900 MHz	52.24	-1.99	1.538	1.18
2013-07-05	Head	2450 MHz	39.73	1.35	1.825	1.39
	Body	2450 MHz	52.24	-0.87	1.961	0.56
2013-07-16	Head	5800 MHz	35.84	1.53	5.325	1.04
	Body	5800 MHz	48.73	1.10	6.115	1.92


Note: The liquid temperature is 22.0 °C

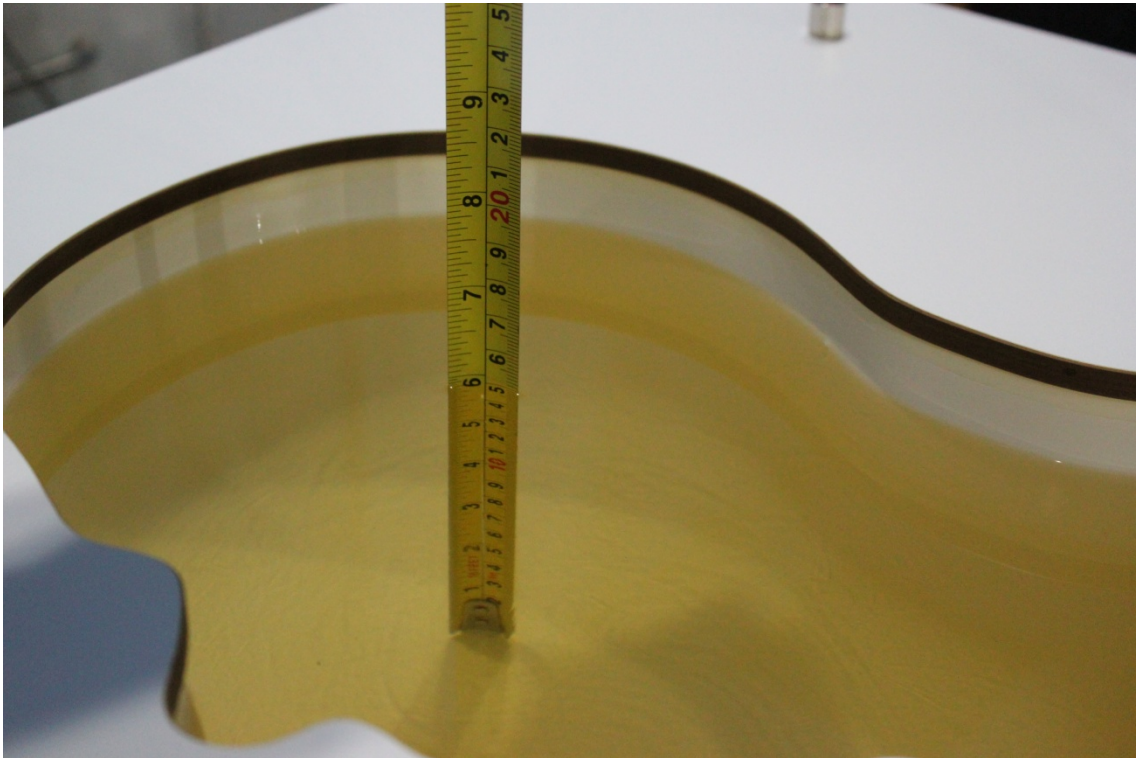


Picture 7-1: Liquid depth in the Head Phantom (750 MHz)




Picture 7-2: Liquid depth in the Flat Phantom (750 MHz)

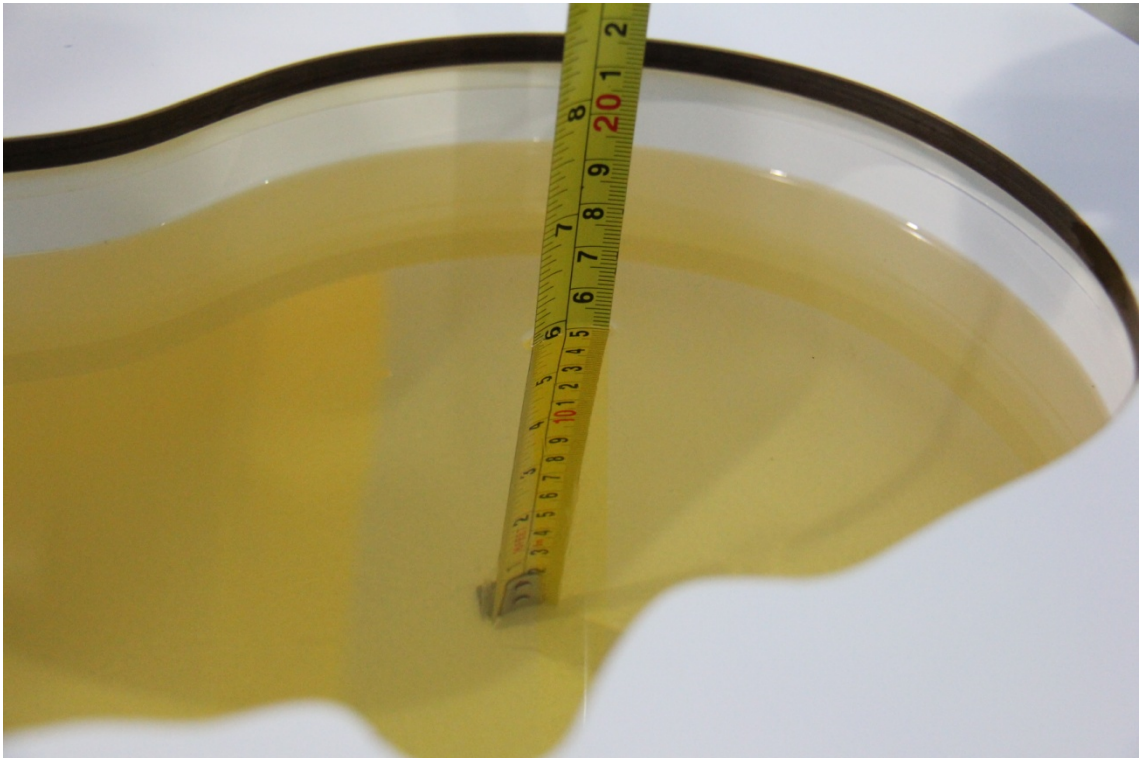


Picture 7-3: Liquid depth in the Head Phantom (835 MHz)

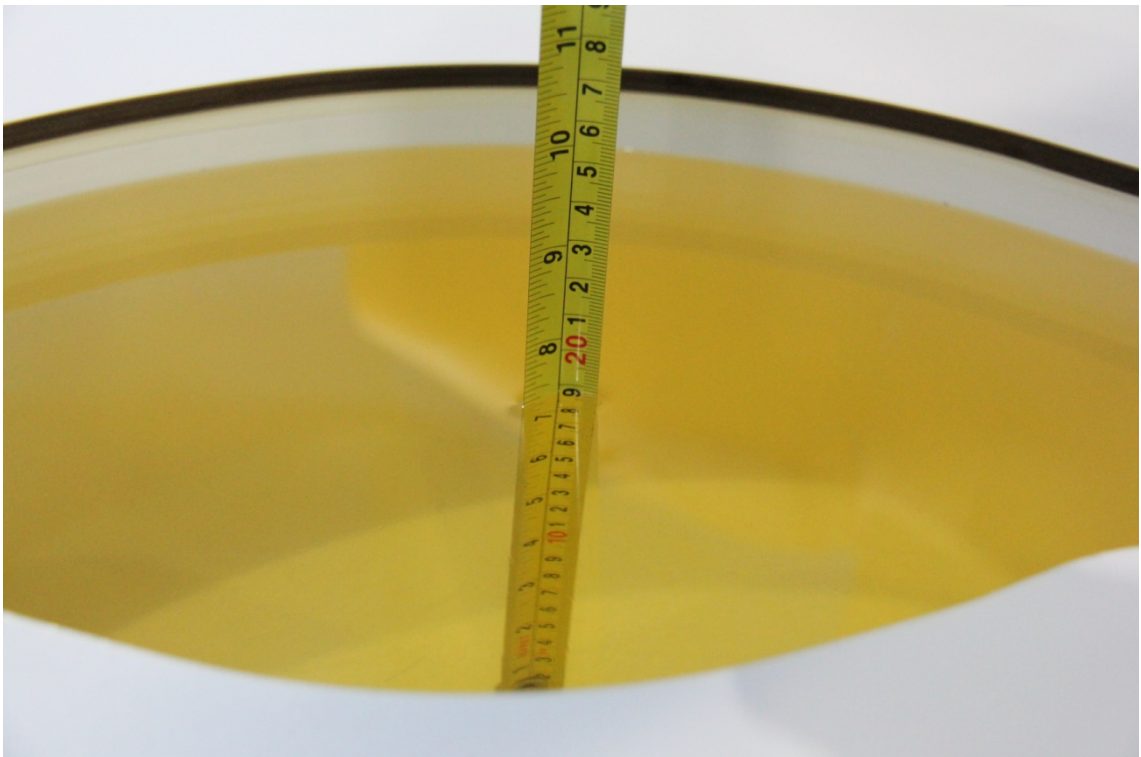


Picture 7-4: Liquid depth in the Flat Phantom (835 MHz)

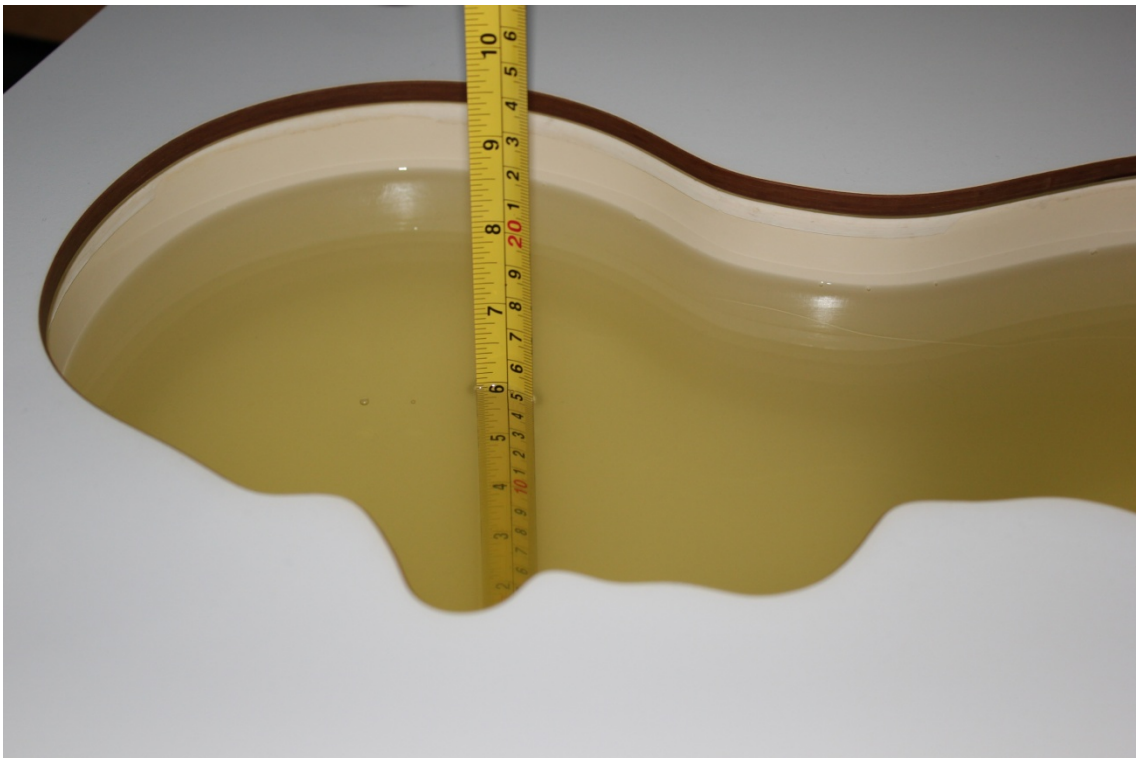


Picture 7-5: Liquid depth in the Head Phantom (1750 MHz)

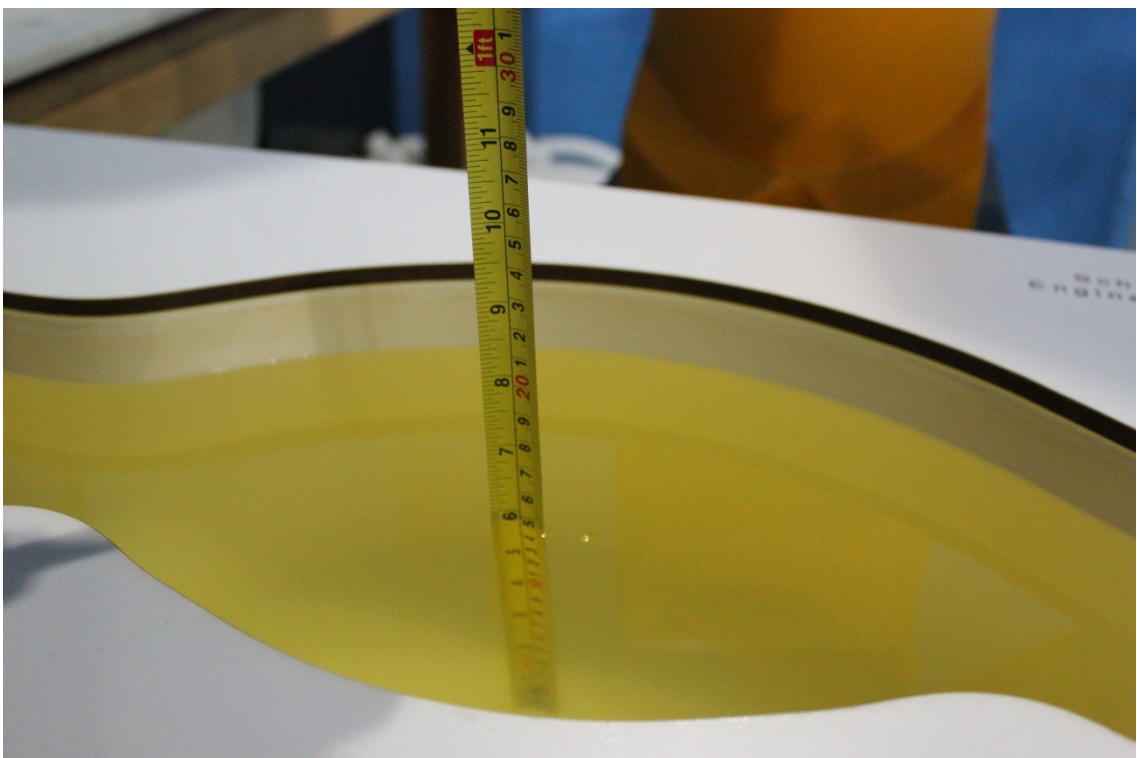

Picture 7-6 Liquid depth in the Flat Phantom (1750MHz)

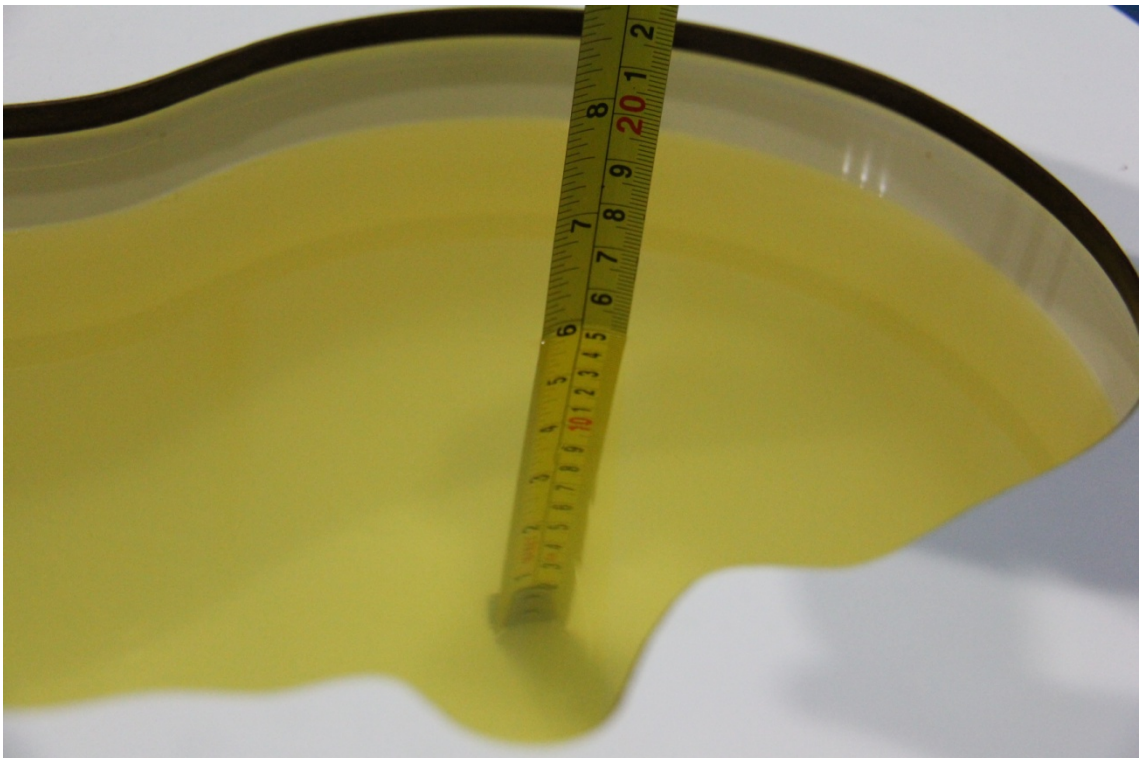


Picture 7-7: Liquid depth in the Head Phantom (1900 MHz)

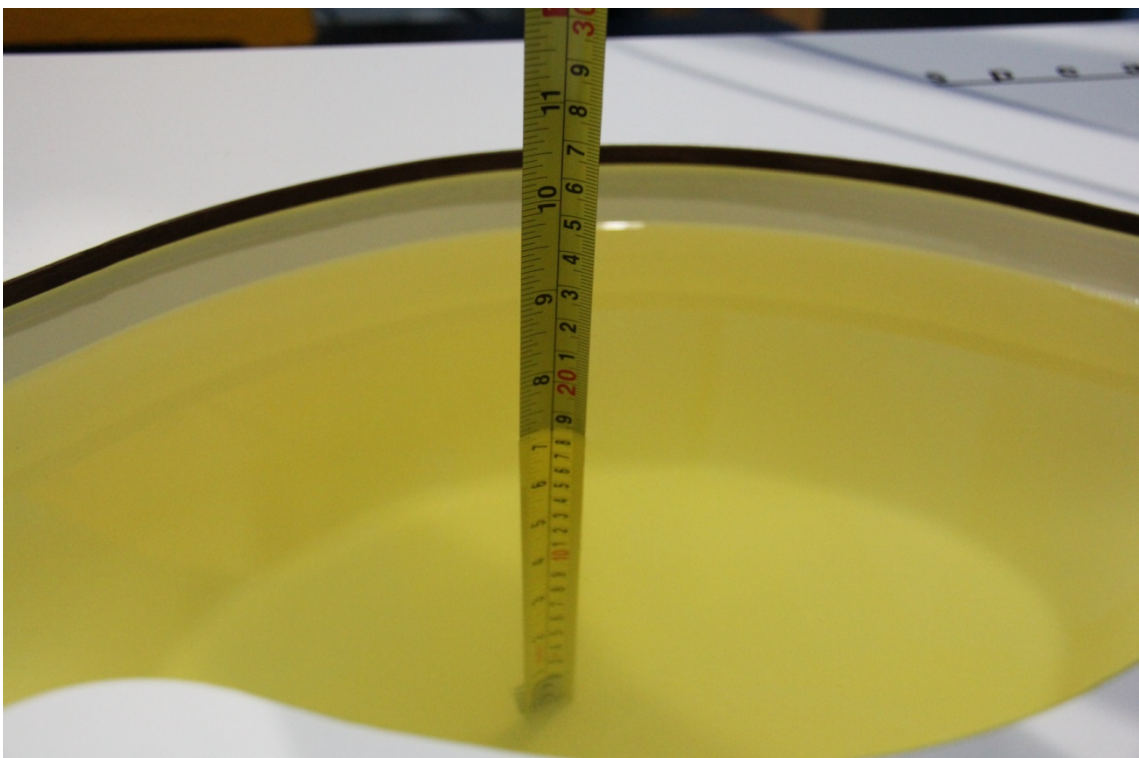


Picture 7-8 Liquid depth in the Flat Phantom (1900MHz)




Picture 7-9 Liquid depth in the Head Phantom (2450MHz)

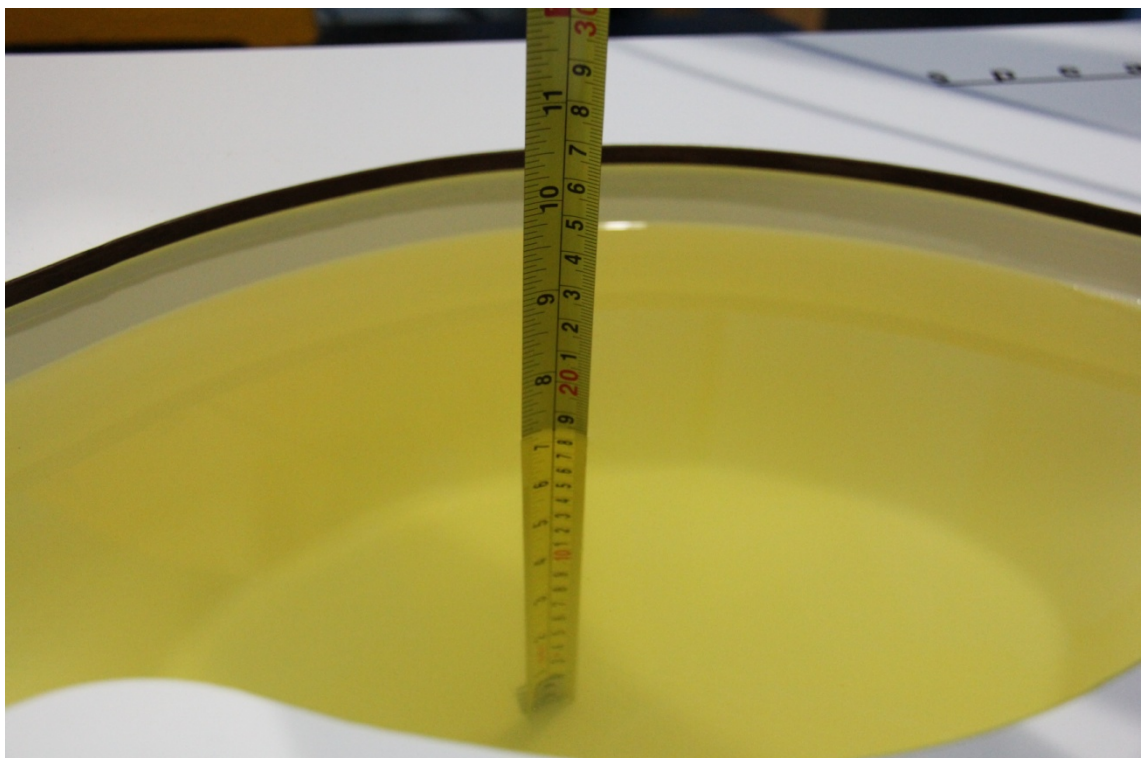

Picture 7-10 Liquid depth in the Flat Phantom (2450MHz)

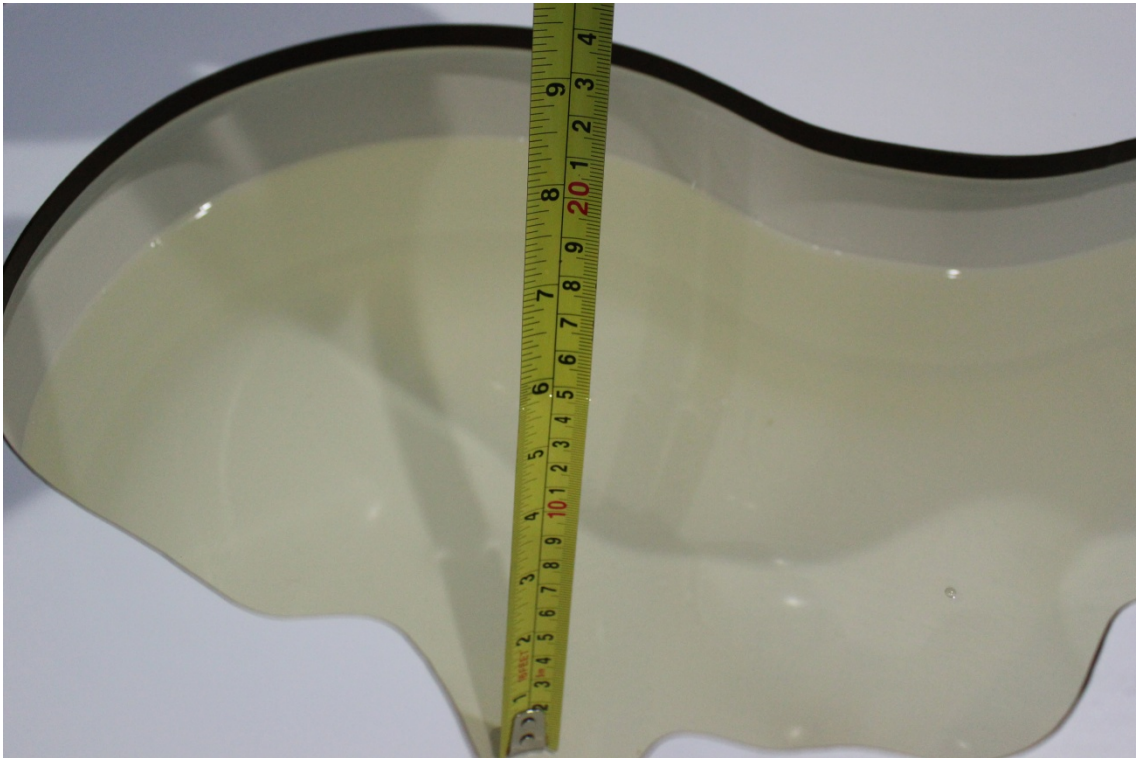

Picture 7-11 Liquid depth in the Head Phantom (5800MHz)

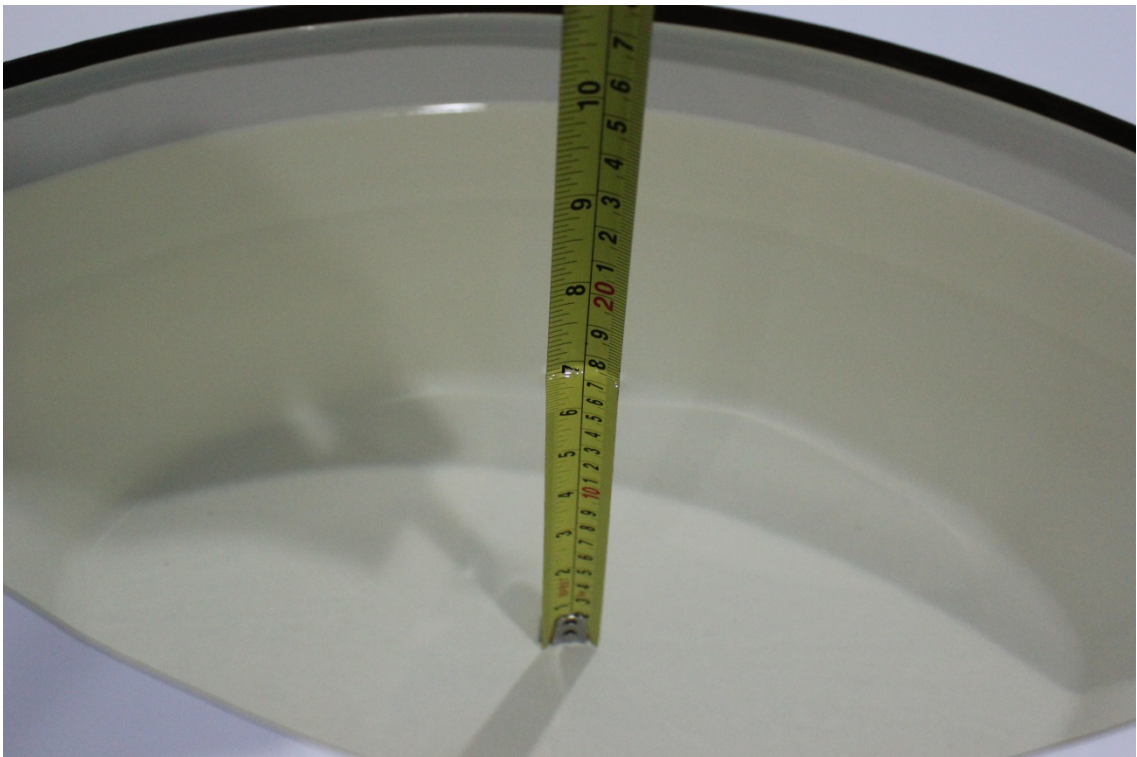

Picture 7-12 Liquid depth in the Flat Phantom (5800MHz)

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2013-07-12	750 MHz	5.49	8.36	5.60	8.36	2.00%	0.00%
2013-07-13	835 MHz	6.07	9.30	6.20	9.48	2.14%	1.94%
2013-07-14	1750 MHz	19.3	36.2	19.80	37.04	2.59%	2.32%
2013-07-15	1900 MHz	20.6	39.1	20.24	38.36	-1.75%	-1.89%
2013-07-05	2450 MHz	24.4	52.4	23.80	51.20	-2.46%	-2.29%
2013-07-16	5800 MHz	23.3	81.6	22.60	79.60	-3.00%	-2.45%

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2013-07-12	750 MHz	5.80	8.80	5.72	8.68	-1.38%	-1.36%
2013-07-13	835 MHz	6.20	9.36	6.32	9.52	1.94%	1.71%
2013-07-14	1750 MHz	20.1	37.4	19.72	36.44	-1.89%	-2.57%
2013-07-15	1900 MHz	21.3	39.9	21.76	40.80	2.16%	2.26%
2013-07-05	2450 MHz	23.6	50.4	24.08	51.60	2.03%	2.38%
2013-07-16	5800 MHz	20.4	73.8	20.10	72.60	-1.47%	-1.63%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

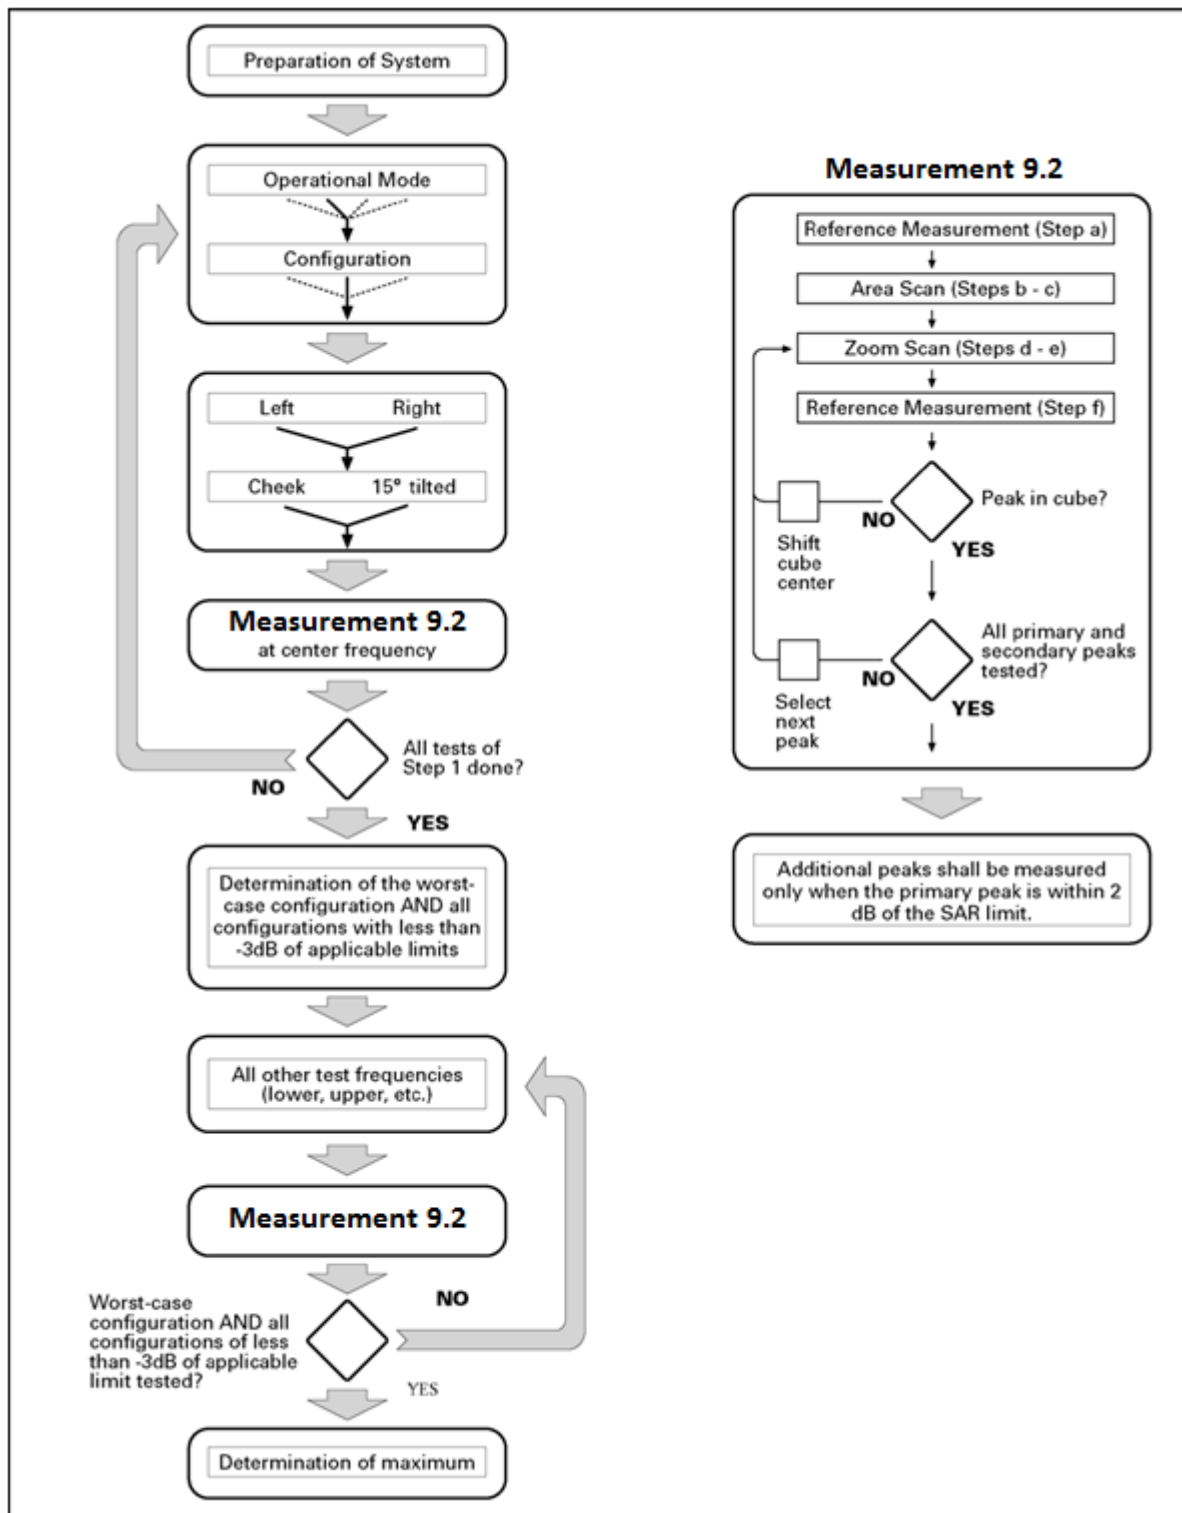

Picture 9.1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^{\circ} \pm 1^{\circ}$	$20^{\circ} \pm 1^{\circ}$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.0	0.0	21	81

9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Schwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.6 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 14.2 to Table 14.50 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

11.1 Manufacturing tolerance

Table 11.1: GSM Speech

GSM 850			
Channel	Channel 251	Channel 190	Channel 128
Target (dBm)	32.3	32.3	32.3
Tune-up (dBm)	33	33	33
GSM 1900			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	29.5	29.5	29.5
Tune-up (dBm)	30.2	30.2	30.2

Table 11.2: GPRS and EGPRS

GSM 850 GPRS (GMSK)				
Channel		251	190	128
1 Txslot	Target (dBm)	32.3	32.3	32.3
	Tune-up (dBm)	33	33	33
2 Txslots	Target (dBm)	31.3	31.3	31.3
	Tune-up (dBm)	32	32	32
GSM 850 EGPRS (GMSK)				
Channel		251	190	128
1 Txslot	Target (dBm)	32.3	32.3	32.3
	Tune-up (dBm)	33	33	33
2 Txslots	Target (dBm)	31.3	31.3	31.3
	Tune-up (dBm)	32	32	32
GSM 850 EGPRS (8PSK)				
Channel		251	190	128
1 Txslot	Target (dBm)	27	27	27
	Tune-up (dBm)	28	28	28
2 Txslots	Target (dBm)	27	27	27
	Tune-up (dBm)	28	28	28
GSM 1900 GPRS (GMSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	29.5	29.5	29.5
	Tune-up (dBm)	30.2	30.2	30.2
2 Txslots	Target (dBm)	29.5	29.5	29.5
	Tune-up (dBm)	30.2	30.2	30.2
GSM 1900 EGPRS (GMSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	29.5	29.5	29.5
	Tune-up (dBm)	30.2	30.2	30.2

2 Txslots	Target (dBm)	29.5	29.5	29.5
	Tune-up (dBm)	30.2	30.2	30.2
GSM 1900 EGPRS (8PSK)				
	Channel	810	661	512
1 Txslot	Target (dBm)	26	26	26
	Tune-up (dBm)	27	27	27
2 Txslots	Target (dBm)	26	26	26
	Tune-up (dBm)	27	27	27

Table 11.3: WCDMA

WCDMA 850 CS			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	23.8	23.8	23.8
Tune-up (dBm)	24.5	24.5	24.5
HSUPA (sub-test 1)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	21.5	22	22
Tune-up (dBm)	22.5	23	23
HSUPA (sub-test 2)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	21.4	21.6	21.5
Tune-up (dBm)	22.5	22.5	22.5
HSUPA (sub-test 3)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	21.4	21.3	21.6
Tune-up (dBm)	22.5	22.5	22.5
HSUPA (sub-test 4)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	21.5	21.5	21.5
Tune-up (dBm)	22.5	22.5	22.5
HSUPA (sub-test 5)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	22.5	22.6	22.6
Tune-up (dBm)	23.5	23.5	23.5
WCDMA 1900 CS			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	23.5	23.5	23.5
Tune-up (dBm)	24.2	24.2	24.2
HSUPA (sub-test 1)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	21	21	21
Tune-up (dBm)	22	22	22

HSUPA (sub-test 2)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	20.5	20.5	20.5
Tune-up (dBm)	21.5	21.5	21.5
HSUPA (sub-test 3)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	20	20	20
Tune-up (dBm)	21	21	21
HSUPA (sub-test 4)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	21	21	21
Tune-up (dBm)	22	22	22
HSUPA (sub-test 5)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	21.5	21.5	21.5
Tune-up (dBm)	22.5	22.5	22.5

Table 11.4: LTE

Mode	Target (dBm)	Tune-up (dBm)
LTE Band 2	23.8	24.5
LTE Band 4	22.5	23.2
LTE Band 5	23.5	24.2
LTE Band 17	23.5	24.2

LTE MPR will follow up 3GPP setting as below:

Modulation	Channel bandwidth / Transmission bandwidth (NRB)						MPR (dB)
	1.4MHz	3.0MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

Table 11.5: Bluetooth

Bluetooth (GFSK)			
Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	4	4	4
Tune-up (dBm)	5.5	5.5	5.5
Bluetooth (DQPSK)			
Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	5	5	5
Tune-up (dBm)	6.5	6.5	6.5

Bluetooth (8DPSK)			
Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	5.5	5.5	5.5
Tune-up (dBm)	7	7	7

Table 11.6: WiFi

802.11 b (2.4GHz)			
Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	16.5	16.5	16.5
Tune-up (dBm)	18.5	18.5	18.5
802.11 g (2.4GHz)			
Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	13	12	12
Tune-up (dBm)	15	14	14
802.11 n (2.4GHz)			
Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	9.5	9.5	9.5
Tune-up (dBm)	11.5	11.5	11.5
802.11 a (5GHz)			
Channel	Channel 36~48	Ch149	Channel 153~165
Target (dBm)	12	13	12
Tune-up (dBm)	14	15	14
802.11 n (5GHz HT20)			
Channel	Channel 149	Ch157	Channel 36~48&153&161&165
Target (dBm)	12	10.5	11
Tune-up (dBm)	14	12.5	13
802.11 n (5GHz HT40)			
Channel	Channel 38&46	Ch151	Ch 159
Target (dBm)	11	11	10.5
Tune-up (dBm)	13	13	12.5

11.2 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.7: The conducted power measurement results for GSM850/1900

GSM 850MHz	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	32.78	32.74	32.61
GSM 1900MHz	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	29.52	29.55	29.35

Table 11.8: The conducted power measurement results for GPRS and EGPRS

GSM 850 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	32.77	32.73	32.58	-9.03dB	23.74	23.70	23.55
2 Txslots	31.68	31.72	31.63	-6.02dB	25.66	25.70	25.61
GSM 850 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	32.79	32.73	32.57	-9.03dB	23.76	23.70	23.54
2 Txslots	31.63	31.71	31.62	-6.02dB	25.61	25.69	25.60
GSM 850 EGPRS (8PSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	26.73	26.74	26.75	-9.03dB	17.70	17.71	17.72
2 Txslots	26.70	26.75	26.78	-6.02dB	20.68	20.73	20.76
PCS1900 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	29.50	29.58	29.39	-9.03dB	20.47	20.55	20.36
2 Txslots	29.78	29.55	29.45	-6.02dB	23.76	23.53	23.43
PCS1900 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	29.48	29.57	29.49	-9.03dB	20.45	20.54	20.46
2 Txslots	29.74	29.53	29.47	-6.02dB	23.72	23.51	23.45
PCS1900 EGPRS (8PSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	25.91	25.84	25.90	-9.03dB	16.88	16.81	16.87
2 Txslots	25.92	25.97	25.96	-6.02dB	19.90	19.95	19.94

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

According to the conducted power as above, the body measurements are performed with 2Txslots for GPRS and EGPRS.

Note: According to the KDB941225 D03, “when SAR tests for EDGE or EGPRS mode is necessary, GMSK modulation should be used”.

11.3 WCDMA Measurement result

Table 11.9: The conducted Power for WCDMA850/1900

Item	band	FDDV result		
	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)
WCDMA	\	23.80	23.85	23.89
HSUPA	1	22.13	21.70	21.26
	2	20.92	21.21	20.93
	3	21.06	20.92	20.53
	4	21.14	21.50	21.12
	5	22.11	22.19	21.90
Item	band	FDDII result		
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	\	23.66	23.53	23.45
HSUPA	1	20.85	21.65	21.48
	2	20.45	20.18	20.24
	3	20.09	19.93	19.82
	4	20.60	21.19	21.29
	5	21.41	21.73	21.71

Note: HSUPA body SAR for WCDMA850/1900 are not required, because maximum average output power of each RF channel with HSUPA/HSPA+ active is not 1/4 dB higher than that measured without HSUPA/HSPA+ and the maximum SAR for WCDMA850/1900 are not above 75% of the SAR limit.

11.4 LTE Measurement result

Table 11.10: The conducted Power for LTE

Band 2				
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)	
	RB offset		QPSK	16QAM
1.4 MHz	1RB_High	1909.3	23.53	22.73
		1880	23.77	22.69
		1850.7	23.91	22.89
	1RB_Middle	1909.3	23.76	22.64
		1880	23.79	22.75

	1RB_Low	1850.7	23.99	22.51
		1909.3	23.78	22.80
		1880	23.72	22.67
		1850.7	23.80	22.80
	3RB_High	1909.3	23.64	22.65
		1880	23.65	22.82
		1850.7	23.80	22.72
	3RB_Middle	1909.3	23.66	22.83
		1880	23.67	22.61
		1850.7	23.84	23.01
	3RB_Low	1909.3	23.85	22.79
		1880	23.64	22.93
		1850.7	23.76	22.76
	6RB	1909.3	22.72	21.96
		1880	22.72	21.56
		1850.7	22.92	22.08
3 MHz	1RB_High	1908.5	23.62	22.67
		1880	23.86	22.76
		1851.5	23.93	22.71
	1RB_Middle	1908.5	23.78	22.87
		1880	23.75	22.71
		1851.5	23.81	22.87
	1RB_Low	1908.5	23.84	22.84
		1880	23.73	22.68
		1851.5	23.79	22.56
	8RB_High	1908.5	22.89	21.83
		1880	22.83	21.73
		1851.5	22.96	21.84
	8RB_Middle	1908.5	22.84	21.73
		1880	22.70	21.70
		1851.5	22.95	21.92
	8RB_Low	1908.5	22.97	21.84
		1880	22.75	21.74
		1851.5	22.97	21.84
	15RB	1908.5	22.79	21.84
		1880	22.79	21.80
		1851.5	22.97	22.00
5 MHz	1RB_High	1907.5	23.73	23.11
		1880	23.83	23.18
		1852.5	23.88	22.98
	1RB_Middle	1907.5	23.97	23.34
		1880	23.84	23.15

	1RB_Low	1852.5	23.99	22.96
		1907.5	23.96	23.21
		1880	23.84	23.21
		1852.5	23.85	22.89
	12RB_High	1907.5	22.88	21.96
		1880	22.74	21.93
		1852.5	22.96	21.98
	12RB_Middle	1907.5	22.83	21.92
		1880	22.80	21.89
		1852.5	23.01	21.98
	12RB_Low	1907.5	22.99	22.09
		1880	22.76	21.85
		1852.5	22.90	21.98
	25RB	1907.5	22.90	21.86
		1880	22.73	21.81
		1852.5	23.00	22.06
10 MHz	1RB-High	1905	23.70	22.54
		1880	23.80	22.53
		1855	23.77	22.76
	1RB-Middle	1905	24.06	22.64
		1880	23.78	22.45
		1855	23.80	22.80
	1RB-Low	1905	23.72	22.36
		1880	23.72	22.41
		1855	23.68	22.79
	25RB-High	1905	22.84	21.93
		1880	22.68	21.83
		1855	22.85	21.88
	25RB-Middle	1905	22.80	21.87
		1880	22.66	21.79
		1855	22.90	21.96
	25RB-Low	1905	22.78	21.84
		1880	22.75	21.78
		1855	22.92	21.94
	50RB	1905	22.73	21.77
		1880	22.65	21.69
		1855	22.84	21.82
15 MHz	1RB-High	1902.5	23.79	22.63
		1880	23.68	22.49
		1857.5	23.88	22.90
	1RB-Middle	1902.5	23.92	22.52
		1880	23.80	22.46

	1RB-Low	1857.5	23.74	22.73
		1902.5	23.63	22.33
		1880	23.83	22.47
		1857.5	23.74	22.79
	36RB-High	1902.5	23.01	22.16
		1880	22.80	22.15
		1857.5	22.74	22.04
	36RB-Middle	1902.5	22.76	21.97
		1880	22.71	21.98
		1857.5	22.82	22.09
	36RB-Low	1902.5	22.69	21.74
		1880	22.66	21.77
		1857.5	22.79	21.85
	75RB	1902.5	22.66	21.70
		1880	22.69	21.73
		1857.5	22.73	21.78
20 MHz	1RB-High	1900	23.74	22.82
		1880	23.86	22.83
		1860	23.94	22.60
	1RB-Middle	1900	23.78	22.73
		1880	23.79	22.68
		1860	23.77	22.44
	1RB-Low	1900	23.57	22.70
		1880	23.68	22.70
		1860	23.82	22.46
	50RB-High	1900	22.76	21.74
		1880	22.82	22.21
		1860	22.89	21.78
	50RB-Middle	1900	22.70	21.71
		1880	22.65	21.71
		1860	22.81	21.77
	50RB-Low	1900	22.57	21.63
		1880	22.49	22.10
		1860	22.75	21.79
	100RB	1900	22.71	21.65
		1880	22.63	21.67
		1860	22.82	21.75
Band 4				
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)	
	RB offset		QPSK	16QAM
1.4 MHz	1RB_High	1754.3	22.64	21.54
		1732.5	22.46	21.30

	1RB_Middle	1710.7	22.30	21.26
		1754.3	22.58	21.55
		1732.5	22.57	21.48
		1710.7	22.34	21.06
	1RB_Low	1754.3	22.63	21.52
		1732.5	22.37	21.20
		1710.7	22.27	21.29
	3RB_High	1754.3	22.56	21.46
		1732.5	22.58	21.67
		1710.7	22.32	21.17
	3RB_Middle	1754.3	22.62	21.47
		1732.5	22.33	21.28
		1710.7	22.21	21.17
	3RB_Low	1754.3	22.56	21.50
		1732.5	22.38	21.56
		1710.7	22.33	21.22
	6RB	1754.3	21.63	20.44
		1732.5	21.38	20.18
		1710.7	21.27	20.10
3 MHz	1RB_High	1753.5	22.57	21.49
		1732.5	22.49	21.35
		1711.5	22.39	21.34
	1RB_Middle	1753.5	22.62	21.58
		1732.5	22.56	21.48
		1711.5	22.43	21.34
	1RB_Low	1753.5	22.53	21.60
		1732.5	22.44	21.35
		1711.5	22.33	21.24
	8RB_High	1753.5	21.70	20.53
		1732.5	21.62	20.46
		1711.5	21.46	20.39
	8RB_Middle	1753.5	21.53	20.49
		1732.5	21.36	20.36
		1711.5	21.33	20.18
	8RB_Low	1753.5	21.61	20.54
		1732.5	21.44	20.38
		1711.5	21.40	20.24
	15RB	1753.5	21.53	20.57
		1732.5	21.37	20.40
		1711.5	21.30	20.32
5 MHz	1RB_High	1752.5	22.61	22.02
		1732.5	22.45	21.91

	1RB_Middle	1712.5	22.41	21.55
		1752.5	22.65	22.11
		1732.5	22.53	21.97
		1712.5	22.46	21.56
	1RB_Low	1752.5	22.47	21.95
		1732.5	22.35	21.96
		1712.5	22.23	21.36
	12RB_High	1752.5	21.69	20.78
		1732.5	21.59	20.65
		1712.5	21.53	20.55
	12RB_Middle	1752.5	21.59	20.60
		1732.5	21.40	20.47
		1712.5	21.39	20.49
	12RB_Low	1752.5	21.70	20.78
		1732.5	21.56	20.69
		1712.5	21.35	20.40
	25RB	1752.5	21.55	20.57
		1732.5	21.37	20.47
		1712.5	21.33	20.37
10 MHz	1RB-High	1750	22.64	21.37
		1732.5	22.41	21.14
		1715	22.42	21.36
	1RB-Middle	1750	22.52	21.19
		1732.5	22.59	21.22
		1715	22.43	21.38
	1RB-Low	1750	22.53	21.27
		1732.5	22.24	20.96
		1715	22.15	21.21
	25RB-High	1750	21.56	20.58
		1732.5	21.55	20.63
		1715	21.42	20.48
	25RB-Middle	1750	21.51	20.51
		1732.5	21.35	20.47
		1715	21.45	20.46
	25RB-Low	1750	21.62	20.61
		1732.5	21.56	20.57
		1715	21.47	20.54
	50RB	1750	21.49	20.47
		1732.5	21.35	20.40
		1715	21.33	20.46
15 MHz	1RB-High	1747.5	22.67	21.32
		1732.5	22.56	21.27

		1717.5	22.30	21.29
	1RB-Middle	1747.5	22.63	21.37
		1732.5	22.58	21.23
		1717.5	22.49	21.42
	1RB-Low	1747.5	22.32	21.03
		1732.5	22.24	20.95
		1717.5	22.27	21.17
	36RB-High	1747.5	21.65	20.97
		1732.5	21.61	20.98
		1717.5	21.34	20.68
	36RB-Middle	1747.5	21.42	20.66
		1732.5	21.39	20.67
		1717.5	21.29	20.62
	36RB-Low	1747.5	21.67	20.73
		1732.5	21.47	20.59
		1717.5	21.41	20.64
	75RB	1747.5	21.48	20.50
		1732.5	21.36	20.38
		1717.5	21.25	20.26
20 MHz	1RB-High	1745	22.60	21.56
		1732.5	22.40	21.45
		1720	22.46	21.23
	1RB-Middle	1745	22.54	21.50
		1732.5	22.48	21.43
		1720	22.44	21.10
	1RB-Low	1745	22.26	21.27
		1732.5	22.22	21.17
		1720	22.12	20.85
	50RB-High	1745	21.54	20.43
		1732.5	21.69	20.92
		1720	21.38	20.37
	50RB-Middle	1745	21.58	20.50
		1732.5	21.47	20.48
		1720	21.32	20.35
	50RB-Low	1745	21.47	20.45
		1732.5	21.11	20.66
		1720	21.40	20.35
	100RB	1745	21.55	20.46
1732.5		21.43	20.46	
1720		21.24	20.19	
Band 5				
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)	

	RB offset		QPSK	16QAM
1.4 MHz	1RB_High	848.3	23.12	22.12
		836.5	23.40	22.32
		824.7	23.40	22.30
	1RB_Middle	848.3	23.17	22.33
		836.5	23.23	22.42
		824.7	23.37	22.56
	1RB_Low	848.3	23.22	22.12
		836.5	23.34	22.28
		824.7	23.39	22.31
	3RB_High	848.3	23.18	22.40
		836.5	23.41	22.69
		824.7	23.31	22.64
	3RB_Middle	848.3	23.06	22.00
		836.5	23.21	22.15
		824.7	23.30	22.25
	3RB_Low	848.3	23.14	22.37
		836.5	23.31	22.54
		824.7	23.37	22.60
	6RB	848.3	22.08	20.98
		836.5	22.25	21.06
		824.7	22.23	21.11
3 MHz	1RB_High	847.5	23.14	22.12
		836.5	23.21	22.65
		825.5	23.21	22.17
	1RB_Middle	847.5	23.28	21.96
		836.5	23.36	22.06
		825.5	23.39	22.07
	1RB_Low	847.5	23.30	22.21
		836.5	23.20	22.63
		825.5	23.36	22.40
	8RB_High	847.5	22.11	21.27
		836.5	22.33	21.39
		825.5	22.27	21.35
	8RB_Middle	847.5	22.14	21.13
		836.5	22.22	21.22
		825.5	22.31	21.17
	8RB_Low	847.5	22.02	21.17
		836.5	22.34	21.47
		825.5	22.31	21.33
	15RB	847.5	22.07	21.16
		836.5	22.23	21.27

		825.5	22.18	21.33
5 MHz	1RB_High	846.5	23.21	22.65
		836.5	23.41	22.29
		826.5	23.32	22.46
		846.5	23.18	21.93
	1RB_Middle	836.5	23.25	22.08
		826.5	23.27	22.05
		846.5	23.23	22.69
	1RB_Low	836.5	23.25	21.93
		826.5	23.45	22.48
		846.5	22.20	21.21
	12RB_High	836.5	22.34	21.27
		826.5	22.18	21.01
		846.5	22.24	21.34
	12RB_Middle	836.5	22.50	21.42
		826.5	22.19	21.30
		846.5	22.19	21.14
	12RB_Low	836.5	22.29	21.19
		826.5	22.31	21.21
		846.5	22.26	21.30
	25RB	836.5	22.34	21.32
		826.5	22.27	21.27
		844.0	23.14	21.88
10 MHz	1RB-High	836.5	23.33	22.08
		829.0	23.27	22.01
		844.0	23.35	21.94
	1RB-Middle	836.5	23.33	22.47
		829.0	23.31	21.83
		844.0	23.32	22.13
	1RB-Low	836.5	23.12	21.90
		829.0	23.34	22.14
		844.0	22.17	21.33
	25RB-High	836.5	22.33	21.47
		829.0	22.27	21.18
		844.0	22.26	21.28
	25RB-Middle	836.5	22.31	21.48
		829.0	22.26	21.31
		844.0	22.35	21.39
	25RB-Low	836.5	22.26	21.38
		829.0	22.19	21.13
		844.0	22.17	21.12
	50RB	836.5	22.30	21.21

		829.0	22.12	21.19
Band 17				
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)	
	RB offset		QPSK	16QAM
5 MHz	1RB_High	713.5	22.92	21.89
		710	23.49	22.62
		706.5	23.50	22.62
	1RB_Middle	713.5	23.10	22.03
		710	23.50	22.36
		706.5	23.25	22.31
	1RB_Low	713.5	23.03	21.99
		710	23.28	22.40
		706.5	23.34	22.46
	12RB_High	713.5	22.09	21.24
		710	22.17	21.21
		706.5	22.08	21.24
	12RB_Middle	713.5	22.16	21.24
		710	22.20	21.24
		706.5	22.17	21.23
	12RB_Low	713.5	22.23	21.32
		710	22.19	21.23
		706.5	22.12	21.15
	25RB	713.5	22.21	21.27
		710	22.18	21.32
		706.5	22.18	21.28
10 MHz	1RB-High	711	22.98	21.67
		710	23.26	21.99
		709	23.23	22.02
	1RB-Middle	711	23.11	21.79
		710	23.14	21.77
		709	23.22	22.23
	1RB-Low	711	22.99	21.59
		710	22.95	21.63
		709	23.13	21.85
	25RB-High	711	22.16	21.26
		710	22.24	21.34
		709	22.27	21.30
	25RB-Middle	711	22.31	21.31
		710	22.12	21.27
		709	22.21	21.22
	25RB-Low	711	22.04	21.14
		710	22.07	21.10