



TEST REPORT

No. I14Z45644-GTE02

for

TCT Mobile Limited

**HSUPA/HSDPA/UMTS dual-band / GSM quadbands/LTE penta bands
mobile phone**

Model Name: Vodafone 985N

FCC ID: RAD487

with

Hardware Version: PIO

Software Version: vGMA-5-EU

Issued Date: 2014-05-13

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0) 10-62304633-2561, Fax:+86(0)10-62304633-2504 Email:welcme@emcite.com. www.emcite.com

CONTENTS

1. TEST LABORATORY.....	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS.....	9
6.1. SUMMARY OF TEST RESULTS	9
6.2. STATEMENTS	9
7. TEST EQUIPMENTS UTILIZED.....	10
ANNEX A: MEASUREMENT RESULTS	11
A.1 OUTPUT POWER.....	11
A.2 EMISSION LIMIT	17
A.3 CONDUCTED EMISSION.....	21
A.4 FREQUENCY STABILITY	25
A.5 OCCUPIED BANDWIDTH	27
A.6 EMISSION BANDWIDTH.....	32
A.7 BAND EDGE COMPLIANCE	37
A.8 CONDUCTED SPURIOUS EMISSION	46

1. Test Laboratory

1.1. Testing Location

Location A

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan Bei Road, Haidian District, Beijing, P.R. China
Postal Code: 100191

Location B

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: Building Shouxian, No.51, Xueyuan Road, Haidian District, Beijing, China
Postal Code: 100191

1.2. Testing Environment


Normal Temperature: 15-35℃
Relative Humidity: 20-75%
Air pressure 980 - 1040 hPa

The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.


1.3. Project data

Testing Start Date: 2014-05-04
Testing End Date: 2014-05-09

1.4. Signature



Zi Xiaogang
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited !
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@jrdcom.com
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited !
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSUPA/HSDPA/UMTS dual-band / GSM quadbands/LTE penta bands mobile phone
Model Name	Vodafone 985N
FCC ID	RAD487
Antenna	Integrated
Output power	24.00dBm maximum EIRP measured for LTE Band 7
Extreme vol. Limits	3.5VDC to 4.35VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
UT23a	352093060002077	PIO	vGMA-5-EU
UT33a	352093060001715	PIO	vGMA-5-EU

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Travel charger	/	TCT-CHR-1942
AE3	Travel charger	/	TCT-CHR-1940
AE4	Travel charger	/	TCT-CHR-1937
AE5	USB cable	/	TCT-DC-0684
AE6	USB cable	/	TCT-DC-0687
AE7	USB cable	/	TCT-DC-0571
AE8	USB cable	/	TCT-DC-0568

AE1

Model	CAC3000002C2
Manufacturer	SCUD
Capacitance	3000 mAh
Nominal voltage	4.35V

AE2,AE3,AE4

Model	CBA3100AG0C2
Manufacturer	TEN PAO
Length of cable	/

AE5, AE6

Model	CDA3122005C1
Manufacturer	Juwei
Length of cable	98cm

AE7,AE8

Model	CDA3122005C2
Manufacturer	Shenhua
Length of cable	100cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of HSUPA/HSDPA/UMTS dual-band / GSM quadbands/LTE penta bands mobile phone with integrated antenna. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-13 Edition
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v02r01

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber FAC-3 (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

6.1. Summary of test results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

LTE Band 7

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Output Power	27.50(h)(2)	A.1	P	B
2	Emission Limit	27.53(m), 2.1051	A.2	P	B
3	Conducted Emission	15.107/15.207	A.3	P	A
4	Frequency Stability	27.54, 2.1055	A.4	P	B
5	Occupied Bandwidth	2.1049(h)(i)	A.5	P	B
6	Emission Bandwidth	27.53(m)	A.6	P	B
7	Band Edge Compliance	27.53(m)	A.7	P	B
8	Conducted Spurious Emission	27.53(m), 2.1057	A.8	P	B

6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by TMC according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1.

This report only deals with the LTE functions among the features described in section 3.

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2015-03-03
2	Test Receiver	ESU26	100376	R&S	2014-11-05
3	EMI Antenna	VULB 9163	514	Schwarzbeck	2014-11-10
4	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
5	LISN	NV216	101200	R&S	2014-07-11
6	Spectrum Analyzer	E4440A	MY48250642	Agilent	2015-02-27
7	EMI Antenna	9117	177	Schwarzbeck	2014-06-29
8	EMI Antenna	VULB 9163	9163 175	Schwarzbeck	2014-07-13
9	EMI Antenna	3117	00119024	ETS-Lindgren	2016-01-20
10	Signal Generator	N5183A	MY49060052	Agilent	2015-03-02
11	Climate chamber	SH-241	92003546	ESPEC	2014-05-11
12	Loop Antenna	HFH2-Z2	829324/007	R&S	2014-12-12
13	Wideband radio communication tester	CMW500	101675	R&S	2014-07-10

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

Reference

FCC: 27.50(h)(2).

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

This result contains peak output power and ERP/EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with spectrum analyzer's RMS detector.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	2502.5	21.91	20.91
		2535	23.18	22.14
		2567.5	23.28	22.24
	1 RB low	2502.5	22.05	21.03
		2535	23.30	22.27
		2567.5	22.87	21.83
	50% RB mid	2502.5	20.96	19.98
		2535	22.23	21.26
		2567.5	21.99	21.02
	100% RB	2502.5	20.88	20.00
		2535	22.16	21.26
		2567.5	21.94	21.03
10MHz	1 RB high	2505	21.88	21.42
		2535	23.18	22.60
		2565	23.49	22.85
	1 RB low	2505	22.23	21.72
		2535	23.37	22.71

	50% RB mid	2565	22.83	22.25
		2505	21.06	20.12
		2535	22.25	21.27
		2565	22.24	21.27
	100% RB	2505	21.09	20.10
		2535	22.23	21.24
		2565	22.24	21.23
15MHz	1 RB high	2507.5	22.06	21.53
		2535	23.18	22.60
		2562.5	23.55	22.93
	1 RB low	2507.5	22.66	22.12
		2535	23.42	22.74
		2562.5	22.95	22.32
	50% RB mid	2507.5	21.78	20.58
		2535	22.36	21.51
		2562.5	22.61	21.75
	100% RB	2507.5	21.45	20.41
		2535	22.38	21.31
		2562.5	22.52	21.46
20MHz	1 RB high	2510	22.10	21.37
		2535	23.14	22.37
		2560	23.56	22.70
	1 RB low	2510	22.77	22.02
		2535	23.49	22.64
		2560	23.00	22.17
	50% RB mid	2510	21.43	20.48
		2535	22.26	21.30
		2560	22.50	21.52
	100% RB	2510	21.42	20.49
		2535	22.25	21.31
		2560	22.39	21.43

Note: Expanded measurement uncertainty is $U = 0.83$ dB, $k = 2$.

A.1.3 Radiated

A.1.3.1 Description


This is the test for the maximum radiated power from the EUT.

Rule Part 27.50(h)(2) specifies “Mobile stations are limited to 2.0 watts EIRP.”.


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

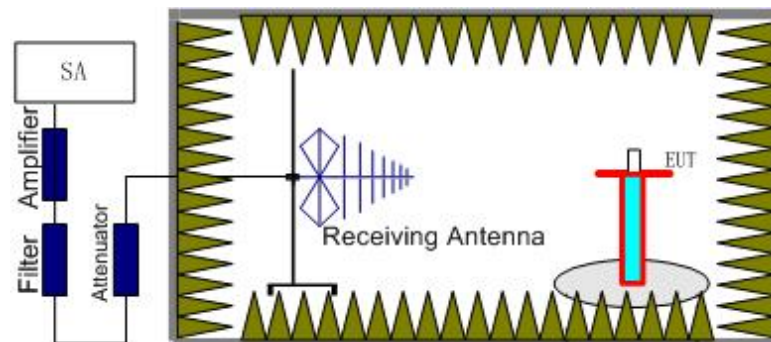

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

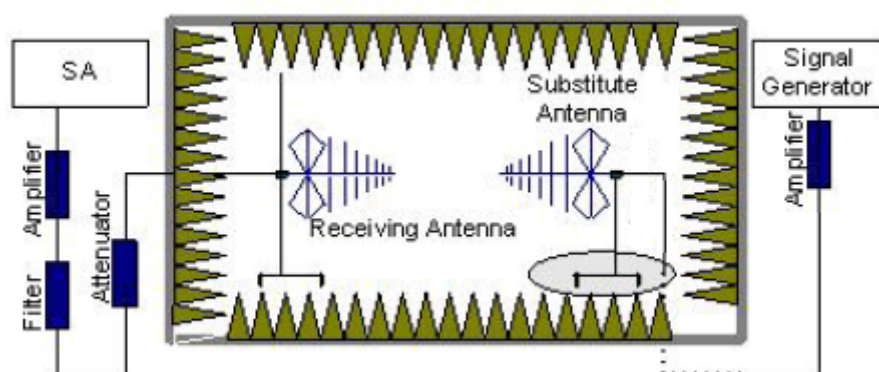

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded.

The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.

The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{\text{Mea}} - P_{\text{Ag}} - P_{\text{cl}} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15$.

A.1.3.3 Measurement result

LTE Band 7- EIRP 27.50(h)(2)

Limits: ≤ 33 dBm (2W)

LTE Band 7_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2502.50	-28.49	3.59	-50.00	-5.41	23.33	33.00	9.67	H
2535.00	-28.02	3.62	-50.00	-5.49	23.85	33.00	9.15	H
2567.50	-28.44	3.65	-50.00	-5.58	23.49	33.00	9.51	H

LTE Band 7_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2505.00	-28.17	3.59	-50.00	-5.41	23.65	33.00	9.35	H
2535.00	-27.87	3.62	-50.00	-5.49	24.00	33.00	9.00	H
2565.00	-28.53	3.65	-50.00	-5.57	23.39	33.00	9.61	H

LTE Band 7_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2507.50	-28.12	3.59	-50.00	-5.42	23.71	33.00	9.29	H
2535.00	-28.02	3.62	-50.00	-5.49	23.85	33.00	9.15	H
2562.50	-28.63	3.64	-50.00	-5.56	23.29	33.00	9.71	H

LTE Band 7_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2510.00	-28.02	3.59	-50.00	-5.43	23.82	33.00	9.18	H
2535.00	-28.06	3.62	-50.00	-5.49	23.81	33.00	9.19	H
2560.00	-28.73	3.64	-50.00	-5.56	23.19	33.00	9.81	H

LTE Band 7_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2502.50	-29.45	3.59	-50.00	-5.41	22.37	33.00	10.63	H
2535.00	-28.98	3.62	-50.00	-5.49	22.89	33.00	10.11	H
2567.50	-29.42	3.65	-50.00	-5.58	22.51	33.00	10.49	H

LTE Band 7_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2505.00	-29.02	3.59	-50.00	-5.41	22.80	33.00	10.20	H
2535.00	-29.02	3.62	-50.00	-5.49	22.85	33.00	10.15	H
2565.00	-29.57	3.65	-50.00	-5.57	22.35	33.00	10.65	H

LTE Band 7_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2507.50	-29.09	3.59	-50.00	-5.42	22.74	33.00	10.26	H
2535.00	-28.99	3.62	-50.00	-5.49	22.88	33.00	10.12	H
2562.50	-29.51	3.64	-50.00	-5.56	22.41	33.00	10.59	H

LTE Band 7_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2510.00	-28.87	3.59	-50.00	-5.43	22.97	33.00	10.03	H
2535.00	-29.09	3.62	-50.00	-5.49	22.78	33.00	10.22	H
2560.00	-29.53	3.64	-50.00	-5.56	22.39	33.00	10.61	H

Peak EIRP(dBm) = P_{Mea}(-27.87dBm) - G_a (-5.49dBi) - P_{Ag} (-50.00dB) - P_{cl} (3.62dB) = 24.00dBm

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: Expanded measurement uncertainty is $U = 0.96 \text{ dB}$, $k = 2$.

A.2 EMISSION LIMIT

Reference

FCC: CFR 2.1051, 27.53(m)


A.2.1 Measurement Method

The measurements procedures in TIA-603C-2004 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 27.53(m). The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 7.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

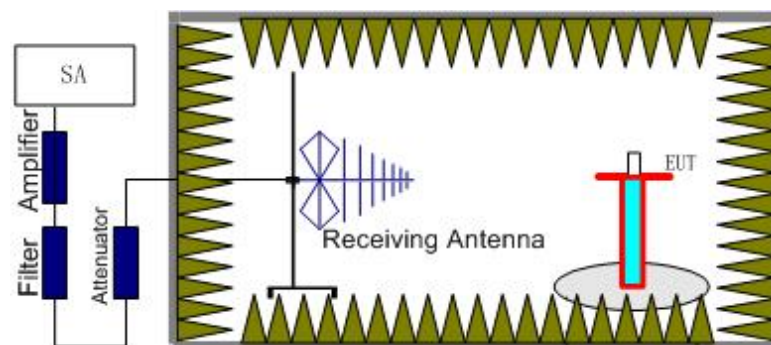

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

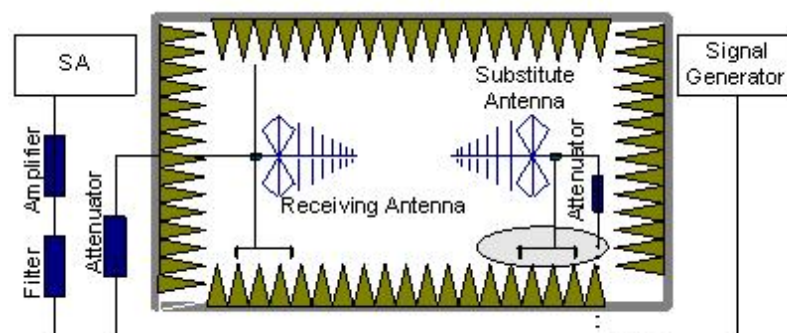

In the chamber, an substitution antenna for the frequency band of interest is placed at the

reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

Part 27.53(m) specifies that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Band 7. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Band 7 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

LTE Band 7, 5 MHz, QPSK, Channel 20775

Frequency(MHz)	$P_{Mea}(\text{dBm})$	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
4703.72	-60.09	4.95	-9.17	-55.87	-13.00	42.87	V
6863.30	-58.57	6.10	-10.96	-53.71	-13.00	40.71	H
7507.97	-40.00	6.64	-11.41	-35.23	-13.00	22.23	H
9888.46	-57.96	7.51	-12.44	-53.03	-13.00	40.03	V
13368.91	-53.08	9.07	-13.67	-48.48	-13.00	35.48	H
16267.51	-45.94	10.26	-12.68	-43.52	-13.00	30.52	H

LTE Band 7, 5 MHz, QPSK, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5434.87	-61.83	5.42	-9.96	-57.29	-13.00	44.29	H
7605.44	-37.13	6.78	-11.51	-32.40	-13.00	19.40	H
9619.11	-59.00	7.90	-12.55	-54.35	-13.00	41.35	V
12117.21	-54.61	8.80	-12.55	-50.86	-13.00	37.86	H
12675.76	-46.19	8.92	-12.91	-42.20	-13.00	29.20	H
13643.73	-50.11	9.14	-13.86	-45.39	-13.00	32.39	V

LTE Band 7, 5 MHz, QPSK, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5135.47	-54.88	5.24	-9.78	-50.34	-13.00	37.34	V
7702.94	-39.79	6.51	-11.60	-34.70	-13.00	21.70	H
8593.51	-58.57	7.36	-12.27	-53.66	-13.00	40.66	V
10270.21	-54.20	7.60	-12.45	-49.35	-13.00	36.35	H
12838.56	-49.05	9.02	-13.11	-44.96	-13.00	31.96	H
13598.13	-52.65	9.17	-13.84	-47.98	-13.00	34.98	V

LTE Band 7, 5 MHz, 16QAM, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5005.60	-60.97	5.17	-9.70	-56.44	-13.00	43.44	V
7507.97	-40.00	6.64	-11.41	-35.23	-13.00	22.23	H
9421.39	-57.88	7.43	-12.60	-52.71	-13.00	39.71	V
11280.26	-55.61	8.55	-12.40	-51.76	-13.00	38.76	H
13629.66	-51.68	9.23	-13.85	-47.06	-13.00	34.06	H
16437.63	-49.05	10.69	-12.47	-47.27	-13.00	34.27	V

LTE Band 7, 5 MHz, 16QAM, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5070.33	-59.88	5.21	-9.74	-55.35	-13.00	42.35	H
7605.48	-37.10	6.78	-11.51	-32.37	-13.00	19.37	H
10140.15	-53.87	7.92	-12.43	-49.36	-13.00	36.36	H
11346.55	-53.94	8.60	-12.40	-50.14	-13.00	37.14	H
13592.41	-52.55	9.21	-13.84	-47.92	-13.00	34.92	V
15752.23	-49.83	10.14	-13.20	-46.77	-13.00	33.77	V

LTE Band 7, 5 MHz, 16QAM, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5135.41	-53.54	5.24	-9.78	-49.00	-13.00	36.00	V
7702.90	-39.16	6.51	-11.60	-34.07	-13.00	21.07	H
9831.34	-60.53	7.64	-12.47	-55.70	-13.00	42.70	V
11898.07	-55.64	8.54	-12.48	-51.70	-13.00	38.70	V
13615.66	-50.80	9.12	-13.85	-46.07	-13.00	33.07	H
15770.07	-50.28	10.14	-13.18	-47.24	-13.00	34.24	V

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

A.3 CONDUCTED EMISSION

Reference

FCC: CFR Part 15.107/207

The measurement procedure in ANSI C63.4-2009 is used. Conducted emission is measured with travel charger. The EUT is working under LTE FDD band 7 traffic mode which is the worst case of conducted emission measurement.


For test layout photo, please refer to Pic.2 in Annex B.

A.3.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

A.3.2 Measurement result

LTE Band 7, 5 MHz bandwidth

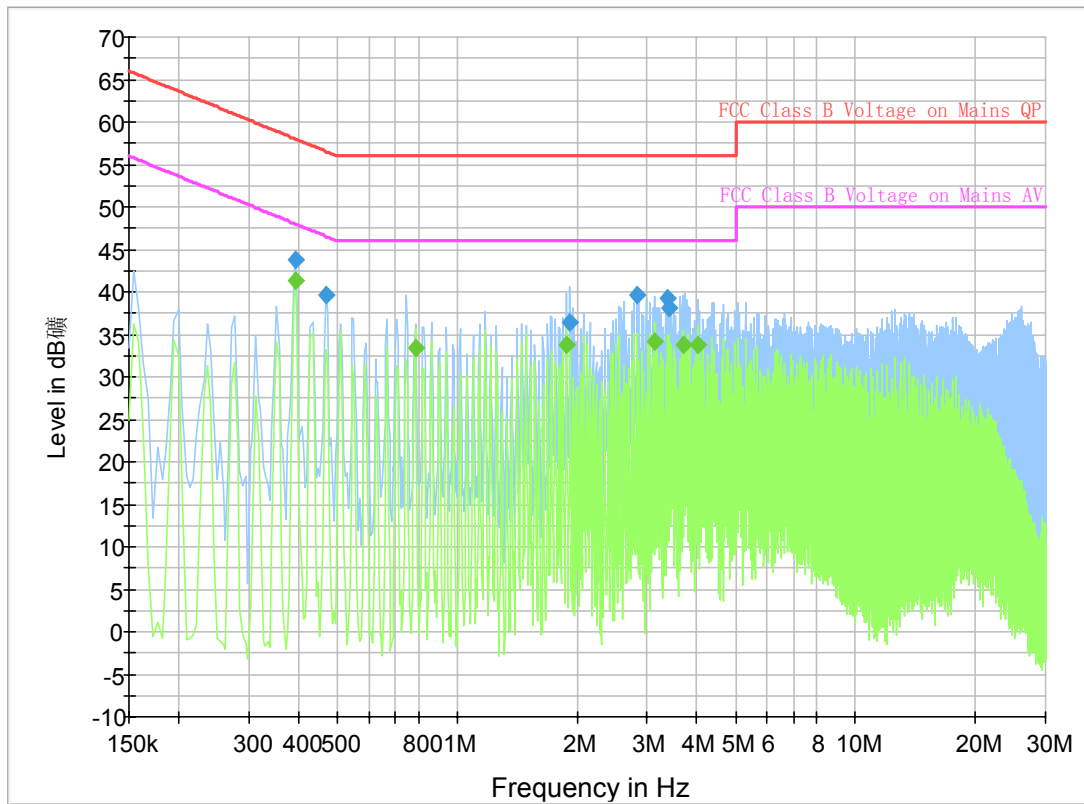


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.393000	43.9	GND	L1	9.8	14.1	58.0
0.469500	39.5	GND	N	9.8	17.0	56.5
1.918500	36.4	GND	N	9.7	19.6	56.0
2.818500	39.5	GND	L1	9.7	16.5	56.0
3.367500	39.3	GND	L1	9.7	16.7	56.0
3.408000	38.1	GND	L1	9.7	17.9	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.393000	41.4	GND	L1	9.8	6.6	48.0
0.784500	33.4	GND	L1	9.8	12.6	46.0
1.878000	33.8	GND	L1	9.7	12.2	46.0
3.133500	34.1	GND	L1	9.7	11.9	46.0
3.682500	33.7	GND	L1	9.7	12.3	46.0
4.033500	33.7	GND	L1	9.7	12.3	46.0

MP3

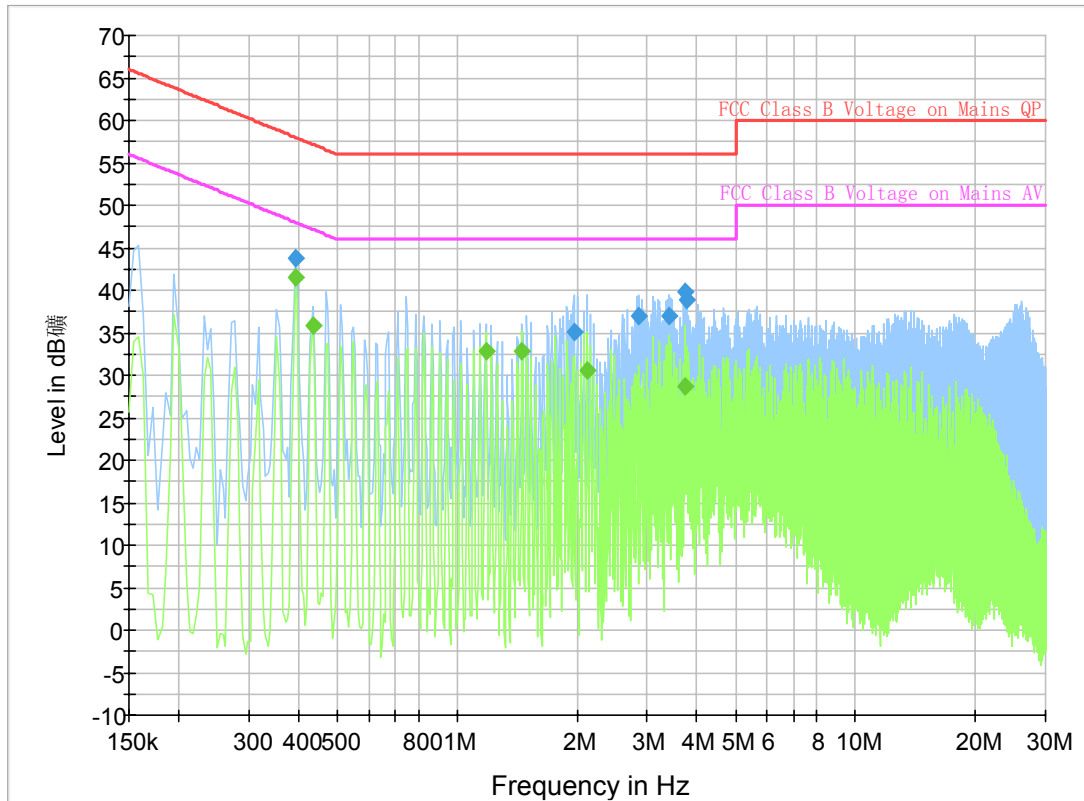


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.393000	43.8	GND	L1	9.8	14.2	58.0
1.963500	35.1	GND	L1	9.7	20.9	56.0
2.863500	37.0	GND	L1	9.7	19.0	56.0
3.412500	37.0	GND	L1	9.7	19.0	56.0
3.723000	39.7	GND	L1	9.7	16.3	56.0
3.763500	38.8	GND	L1	9.7	17.2	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.393000	41.5	GND	L1	9.8	6.5	48.0
0.433500	35.8	GND	L1	9.8	11.4	47.2
1.180500	32.9	GND	L1	9.7	13.1	46.0
1.455000	32.9	GND	L1	9.7	13.1	46.0
2.116500	30.6	GND	L1	9.7	15.4	46.0
3.736500	28.7	GND	L1	9.7	17.3	46.0

CAMERA

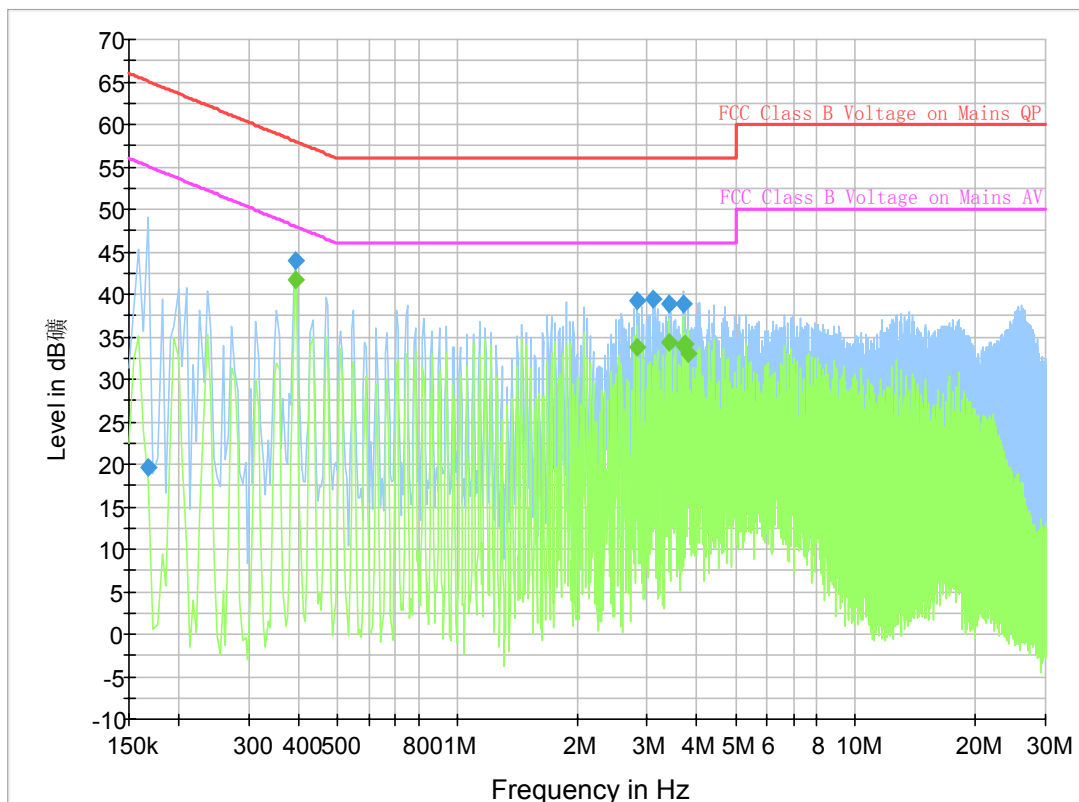

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.168000	19.7	GND	L1	9.8	45.4	65.1
0.393000	43.9	GND	L1	9.8	14.1	58.0
2.818500	39.3	GND	L1	9.7	16.7	56.0
3.093000	39.5	GND	L1	9.7	16.5	56.0
3.408000	38.9	GND	L1	9.7	17.1	56.0
3.682500	38.9	GND	L1	9.7	17.1	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.393000	41.8	GND	L1	9.8	6.2	48.0
2.818500	33.8	GND	L1	9.7	12.2	46.0
3.408000	34.3	GND	L1	9.7	11.7	46.0
3.682500	33.9	GND	L1	9.7	12.1	46.0
3.718500	34.1	GND	L1	9.7	11.9	46.0
3.799500	33.1	GND	L1	9.7	12.9	46.0

A.4 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 27.54.

A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 7, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.4.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.35VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -5.4% to 10.8%. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.3 Measurement results

LTE Band 7, 20MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.5	-4	-11	0.001	0.004
3.8	3	-4	0.001	0.002
4.35	4	-4	0.002	0.002

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	13	-7	0.005	0.003
40°	0	0	0.000	0.000
30°	-2	2	0.001	0.001
20°	-3	5	0.001	0.002
10°	5	0	0.002	0.000
0°	9	-6	0.004	0.003
- 10°	3	4	0.001	0.002
- 20°	-2	-6	0.001	0.003
- 30°	-4	-9	0.001	0.003

Expanded measurement uncertainty for this test item is 10 Hz, $k = 2$.

A.5 OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049(h)(i)


A.5.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

LTE band 7, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	4487.18	4503.21

LTE band 7, 5MHz Bandwidth, QPSK (99% BW)

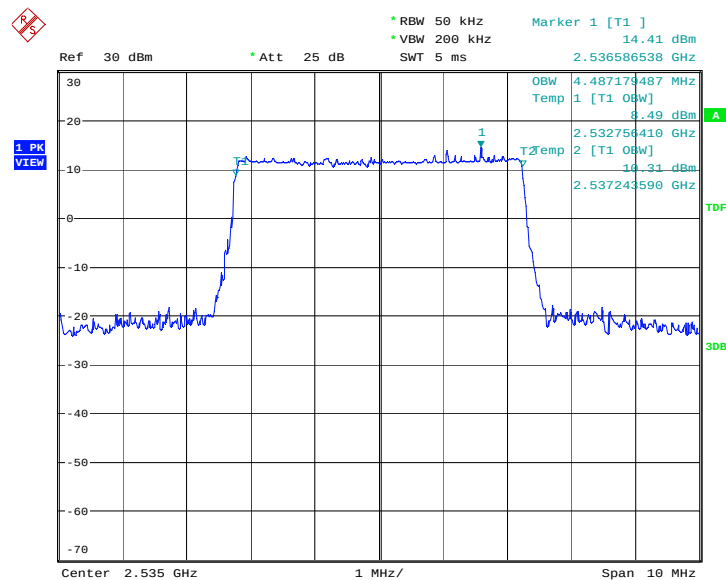

Date: 4.MAY.2014 17:02:08

LTE band 7, 5MHz Bandwidth,16QAM (99% BW)

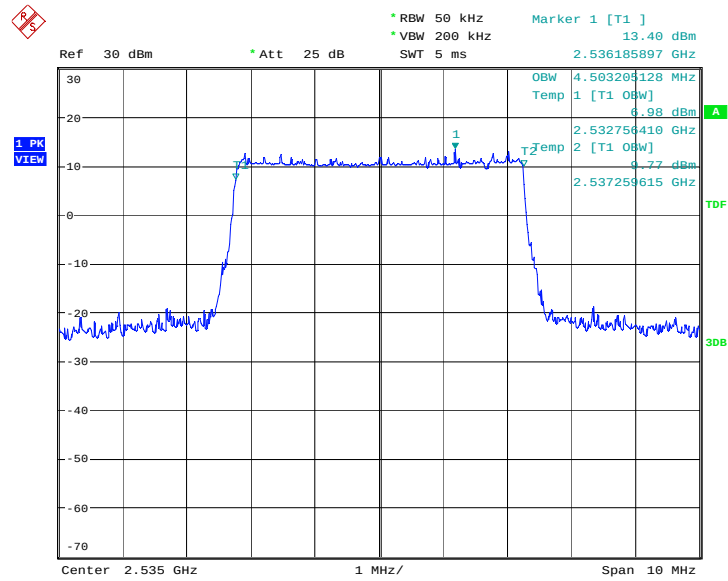


Date: 4.MAY.2014 17:02:21

LTE band 7, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	8966.35	8966.35

LTE band 7, 10MHz Bandwidth, QPSK (99% BW)

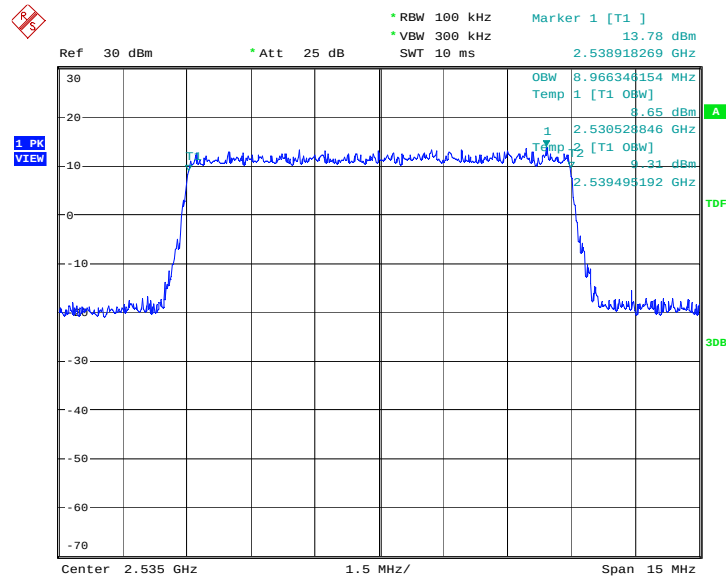

Date: 4.MAY.2014 17:07:48

LTE band 7, 10MHz Bandwidth, 16QAM (99% BW)

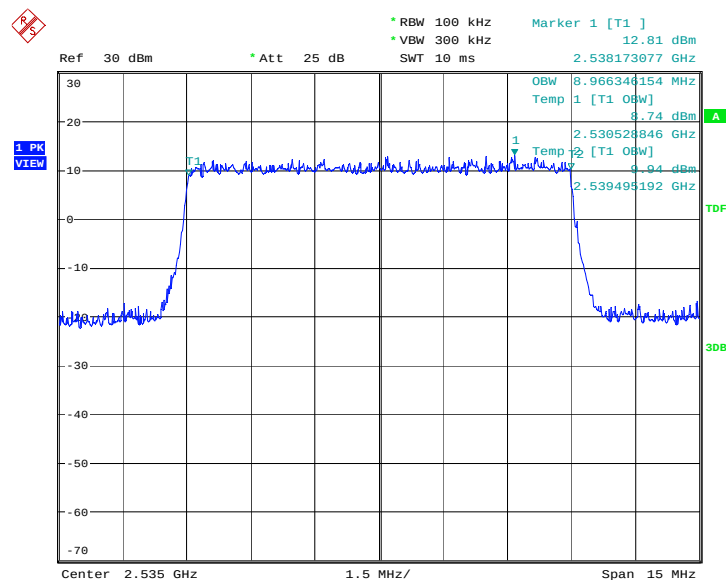


Date: 4.MAY.2014 17:08:01

LTE band 7, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	13493.59	13461.54

LTE band 7, 15MHz Bandwidth, QPSK (99% BW)

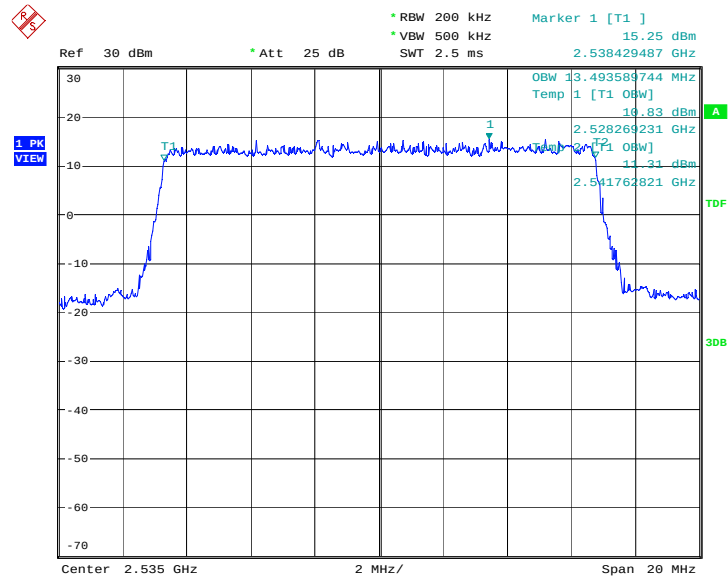

Date: 4.MAY.2014 17:13:35

LTE band 7, 15MHz Bandwidth, 16QAM (99% BW)

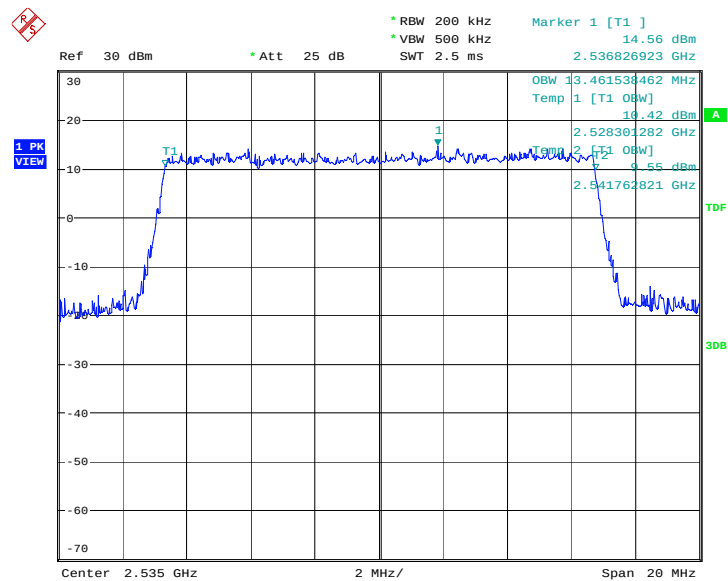


Date: 4.MAY.2014 17:13:49

LTE band 7, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	17932.69	17932.69

LTE band 7, 20MHz Bandwidth, QPSK (99% BW)

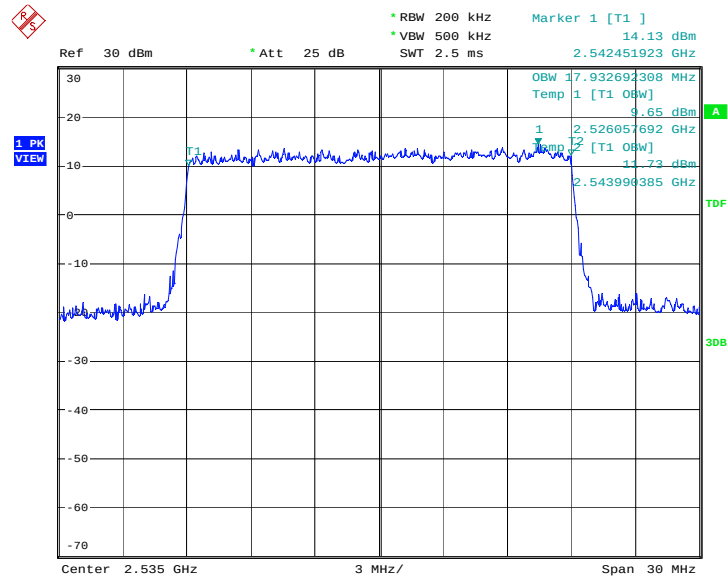

Date: 4.MAY.2014 17:20:24

LTE band 7, 20MHz Bandwidth, 16QAM (99% BW)

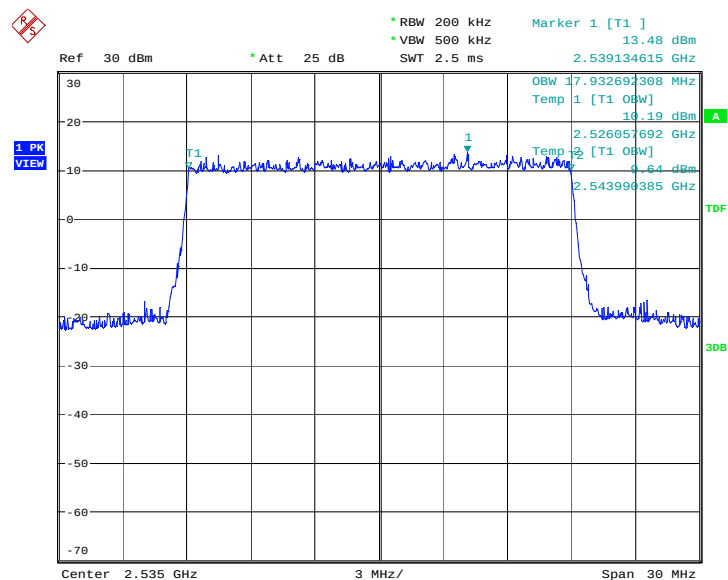

Date: 4.MAY.2014 17:20:38

A.6 EMISSION BANDWIDTH

Reference

FCC: CFR Part 22.917(b), 24.238(a), 27.53(h)


A.6.1 Emission Bandwidth Results

Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

LTE band 7, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	4919.87	4935.90

LTE band 7, 5MHz Bandwidth, QPSK (-26dBc BW)

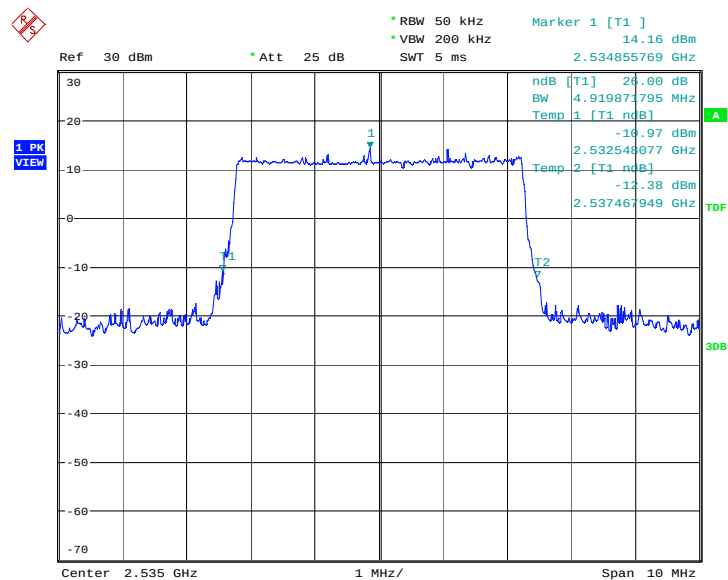

Date: 4.MAY.2014 17:03:14

LTE band 7, 5MHz Bandwidth,16QAM (-26dBc BW)

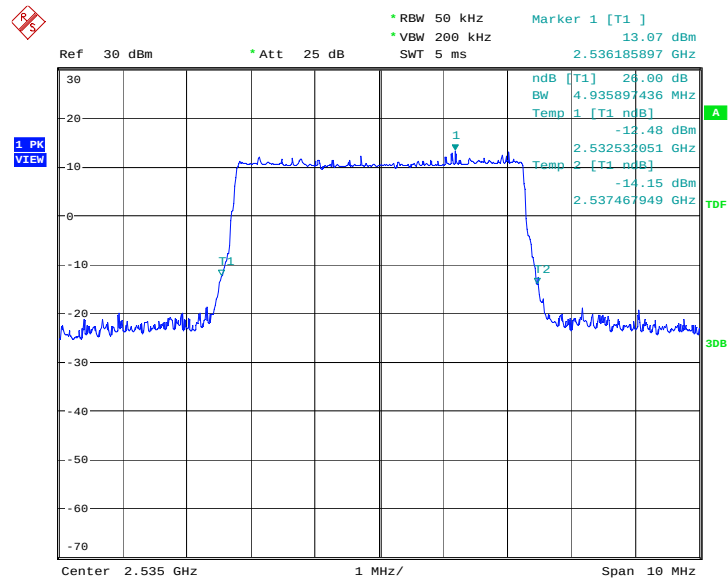


Date: 4.MAY.2014 17:03:30

LTE band 7, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	9759.62	9735.58

LTE band 7, 10MHz Bandwidth, QPSK (-26dBc BW)

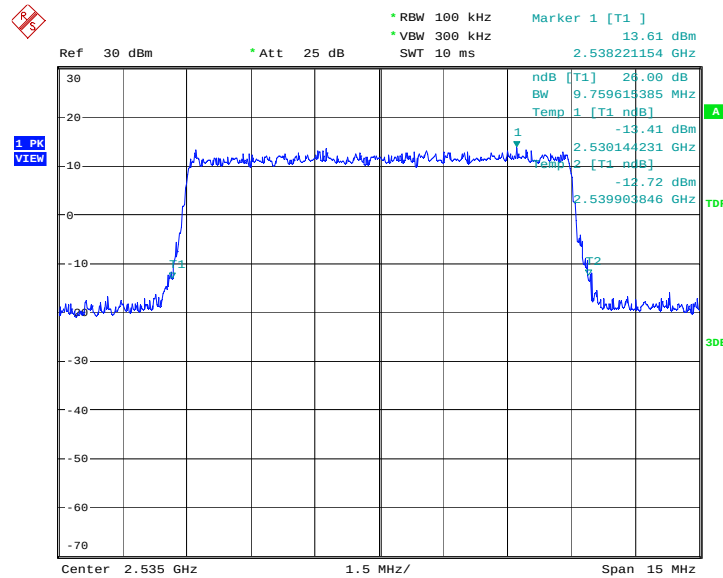

Date: 4.MAY.2014 17:08:54

LTE band 7, 10MHz Bandwidth, 16QAM (-26dBc BW)

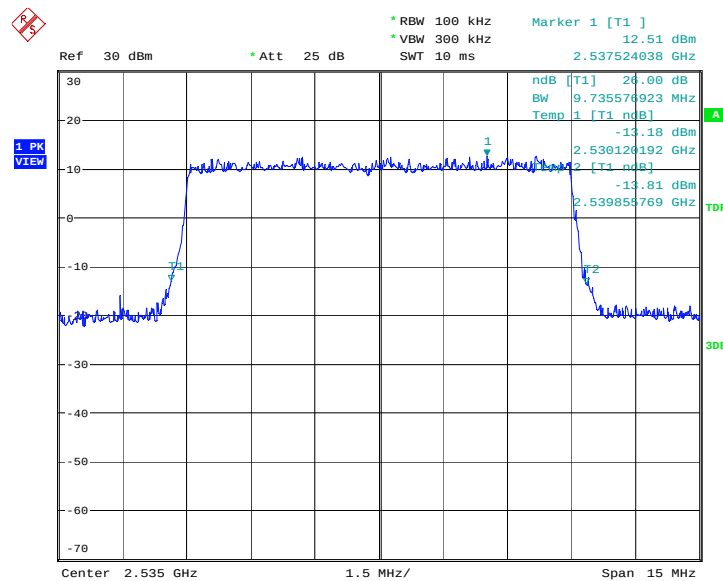


Date: 4.MAY.2014 17:09:10

LTE band 7, 15MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	14679.49	14743.59

LTE band 7, 15MHz Bandwidth, QPSK (-26dBc BW)

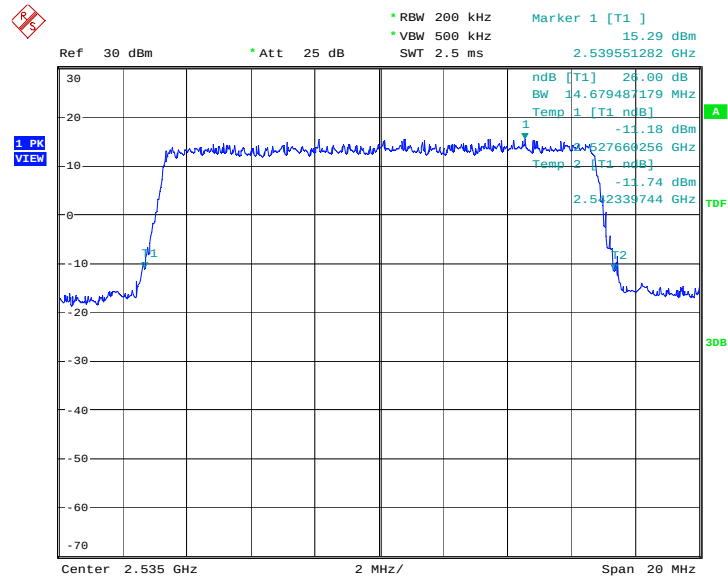

Date: 4.MAY.2014 17:14:42

LTE band 7, 15MHz Bandwidth, 16QAM (-26dBc BW)

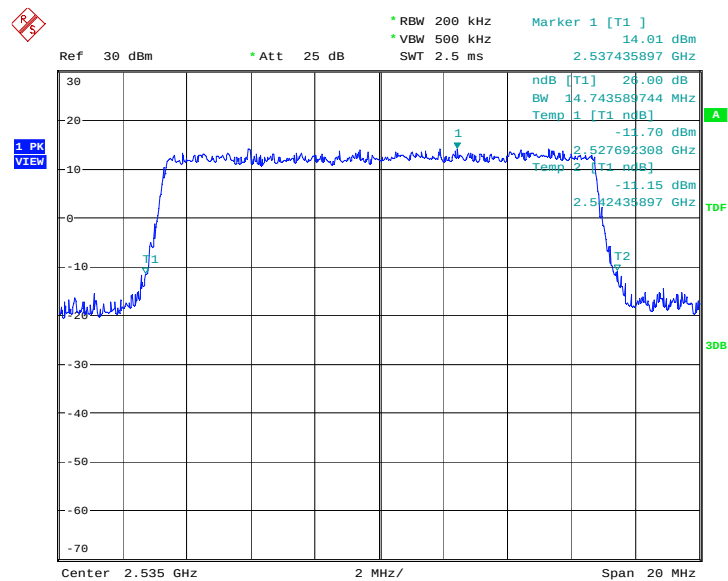


Date: 4.MAY.2014 17:14:58

LTE band 7, 20MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	19230.77	19230.77

LTE band 7, 20MHz Bandwidth, QPSK (-26dBc BW)

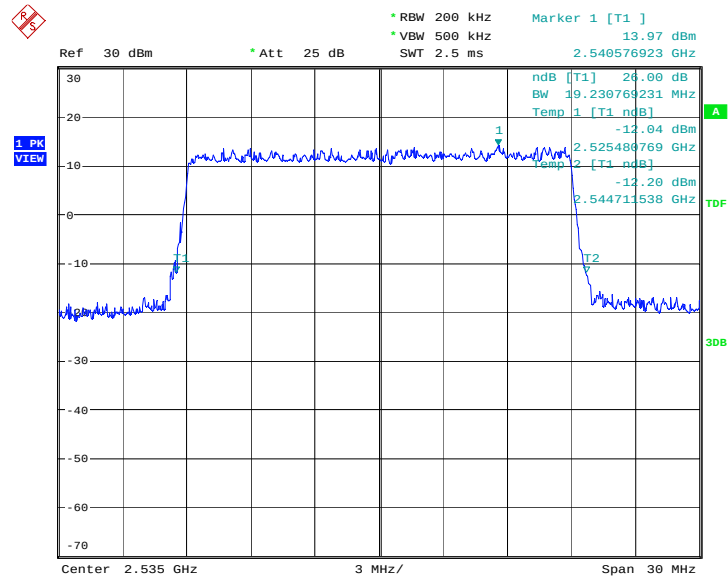

Date: 4.MAY.2014 17:21:31

LTE band 7, 20MHz Bandwidth, 16QAM (-26dBc BW)

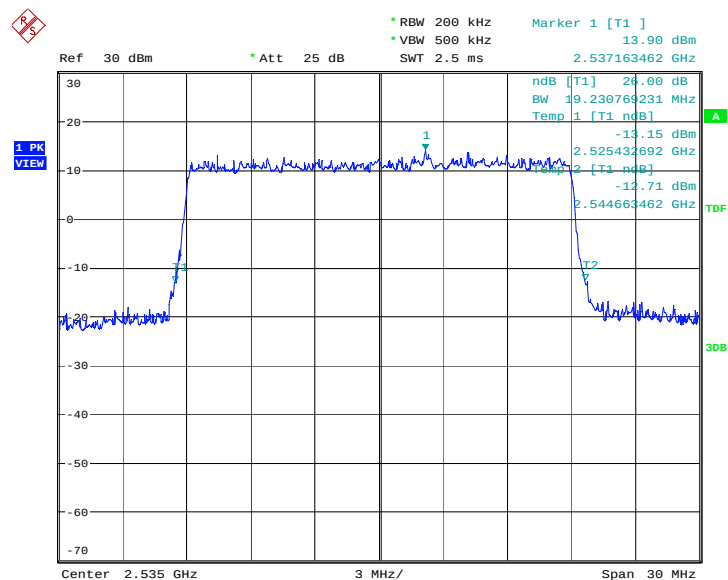

Date: 4.MAY.2014 17:21:47

A.7 BAND EDGE COMPLIANCE

Reference

FCC: CFR Part 22.917(b), 24.238(a), 27.53(h).


A.7.1 Measurement limit

On any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

A.7.2 Measurement result


LTE band 7, 5MHz

LOW BAND EDGE BLOCK-QPSK

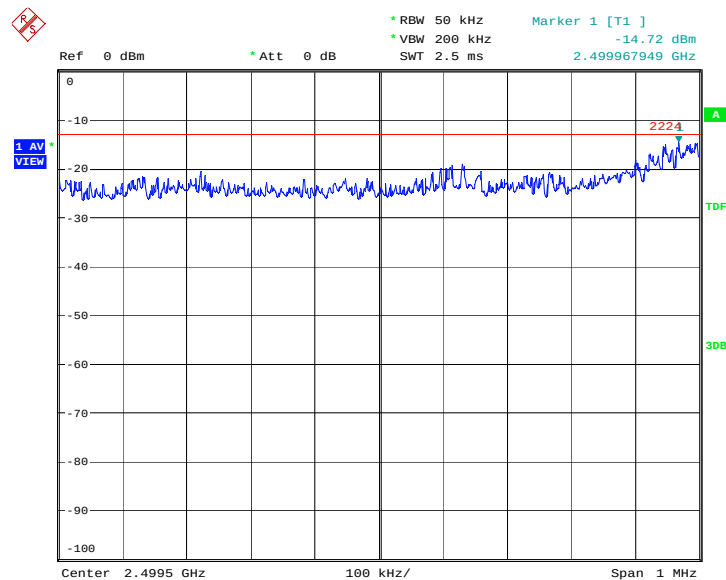


Date: 4.MAY.2014 17:24:58

HIGH BAND EDGE BLOCK-QPSK

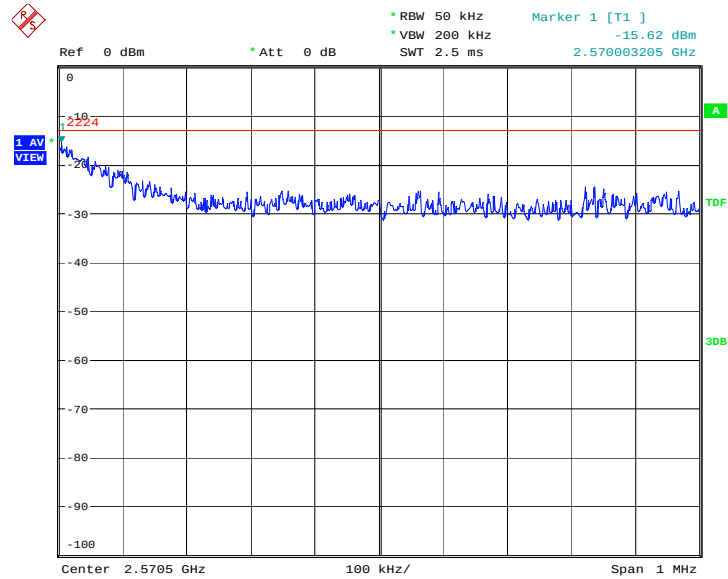


Date: 4.MAY.2014 17:27:08

LOW BAND EDGE BLOCK-16QAM

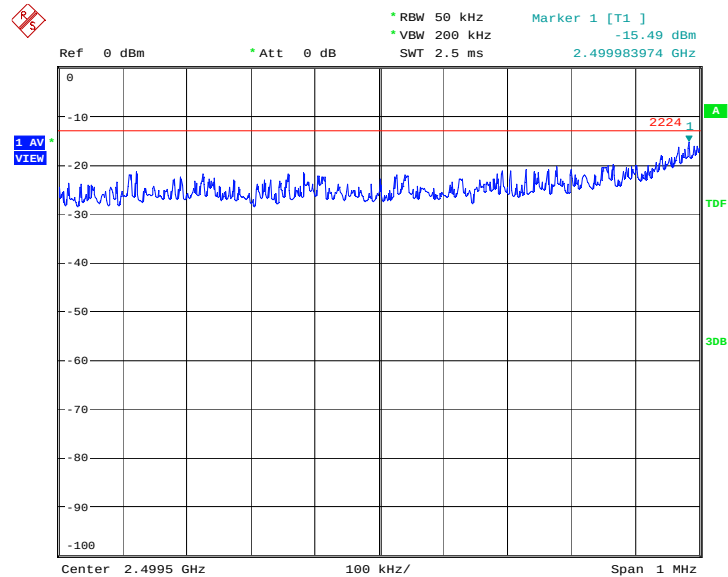


Date: 4.MAY.2014 17:25:08

HIGH BAND EDGE BLOCK-16QAM

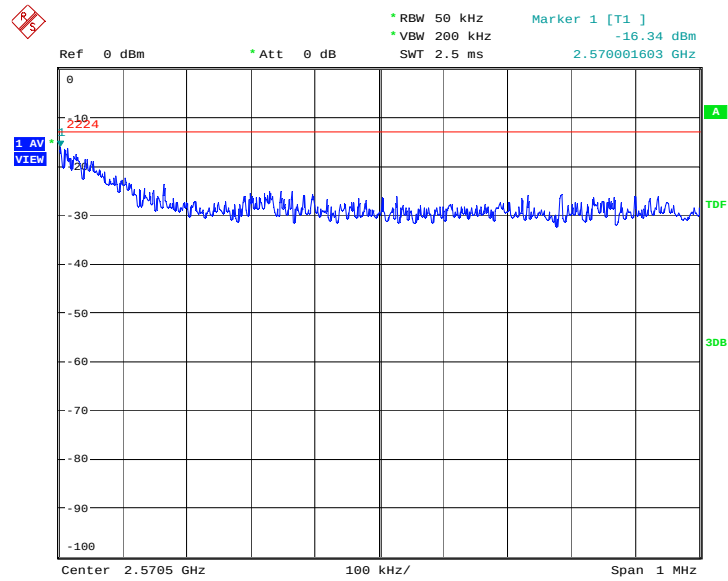


Date: 4.MAY.2014 17:27:18

LTE band 7, 10MHz LOW BAND EDGE BLOCK-QPSK

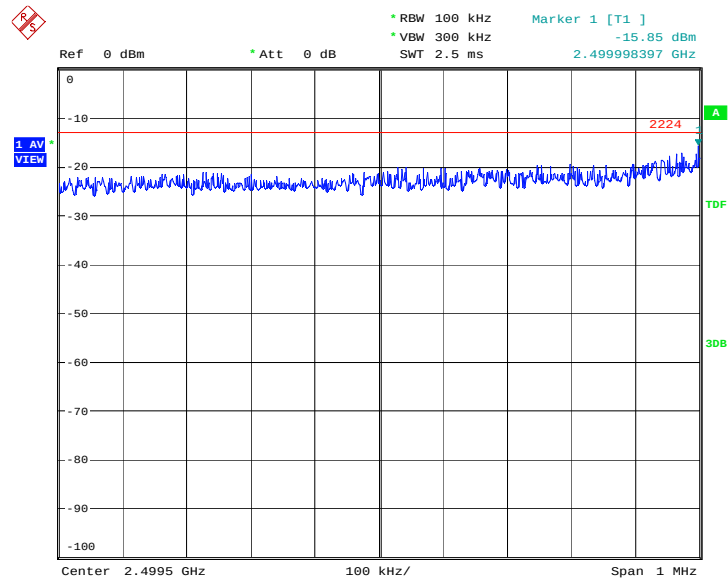


Date: 4.MAY.2014 17:29:17

HIGH BAND EDGE BLOCK-QPSK

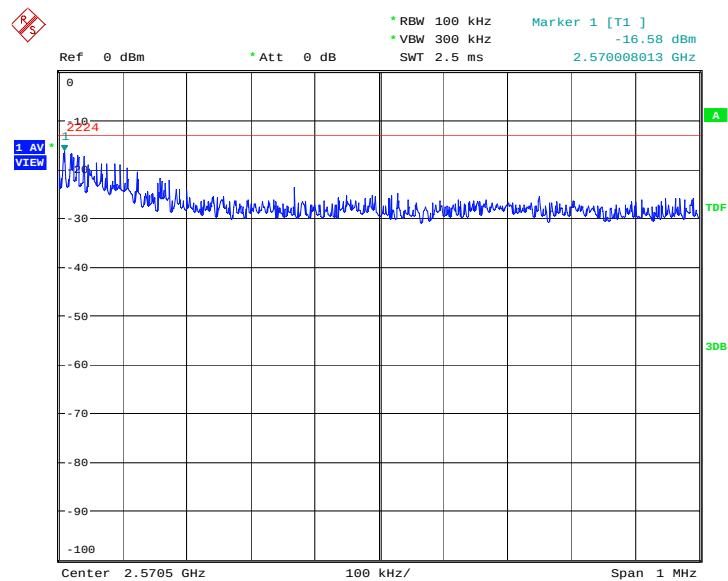


Date: 4.MAY.2014 17:31:26

LOW BAND EDGE BLOCK-16QAM

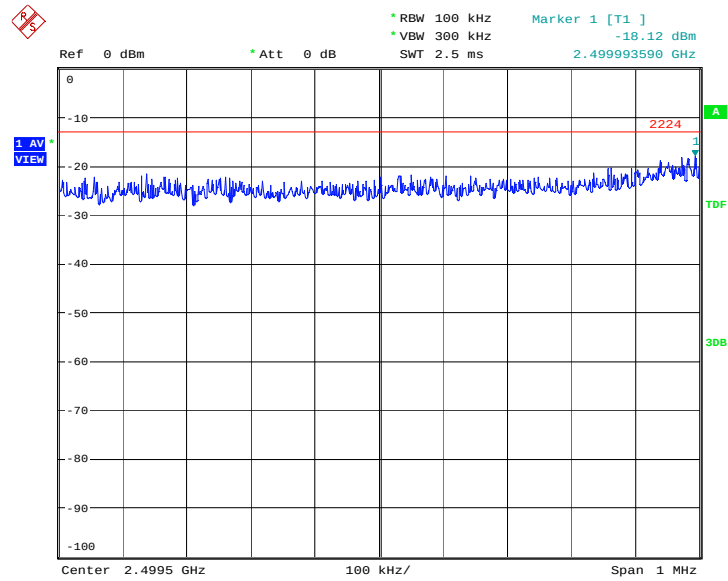

Date: 4.MAY.2014 17:29:27

HIGH BAND EDGE BLOCK-16QAM

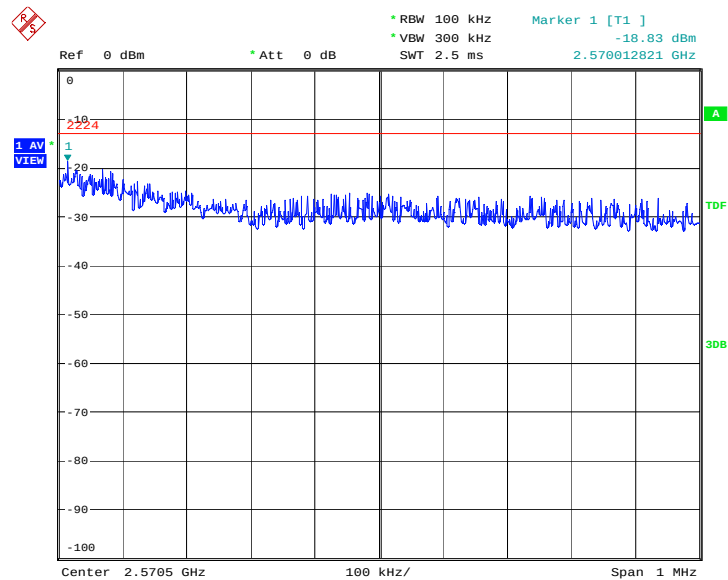

Date: 4.MAY.2014 17:31:37

* RBW 200 kHz
 * VBW 1 MHz
 SWT 2.5 ms

Marker 1 [T1]
 -15.07 dBm
 2.499980769 GHz

Ref 0 dBm
 * Att 0 dB

1 AV VIEW
 TDF
 3dB

Center 2.4995 GHz
 100 kHz/
 Span 1 MHz

* RBW 200 kHz
 * VBW 1 MHz
 * SWT 2.5 ms
 Marker 1 [T1]
 -16.37 dBm
 2.570062500 GHz

Ref 0 dBm
 * Att 0 dB


0
 -10
 -20
 -30
 -40
 -50
 -60
 -70
 -80
 -90
 -100

Center 2.5705 GHz
 100 kHz/
 Span 1 MHz

TDF
 3DB


©Copyright. All rights reserved by TMC Beijing.

LOW BAND EDGE BLOCK-16QAM

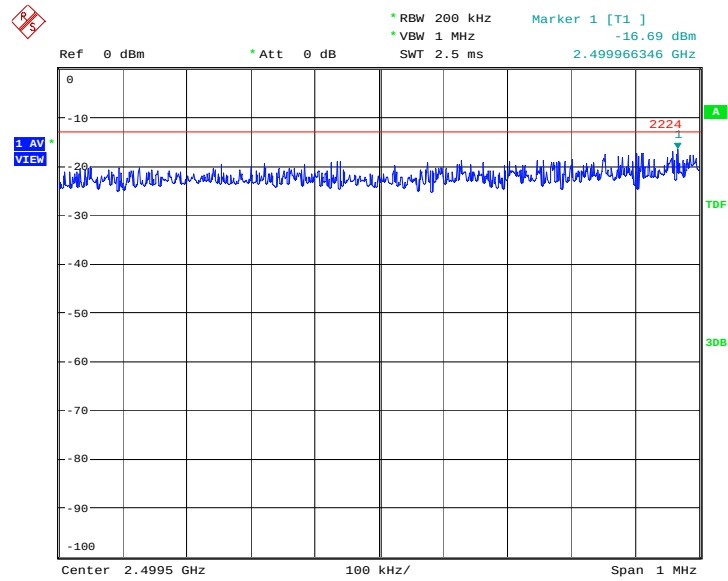


Date: 4.MAY.2014 17:33:46

HIGH BAND EDGE BLOCK-16QAM

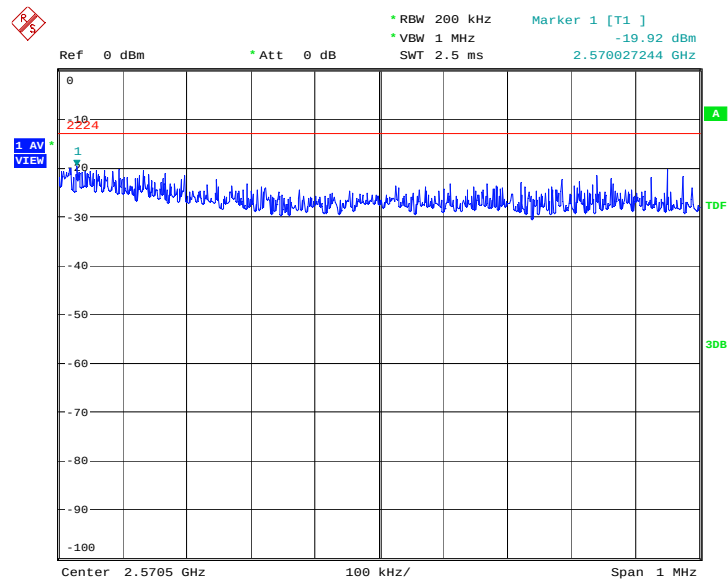


Date: 4.MAY.2014 17:35:56

LTE band 7, 20MHz LOW BAND EDGE BLOCK-QPSK

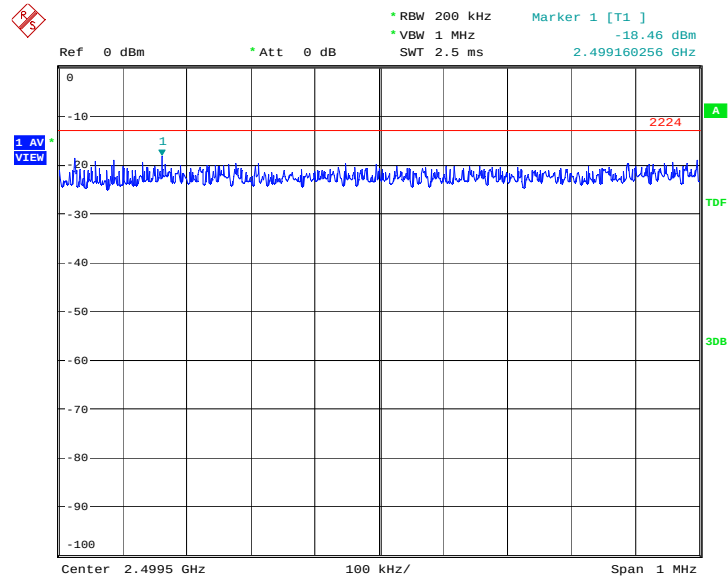


Date: 4.MAY.2014 17:37:55

HIGH BAND EDGE BLOCK-QPSK

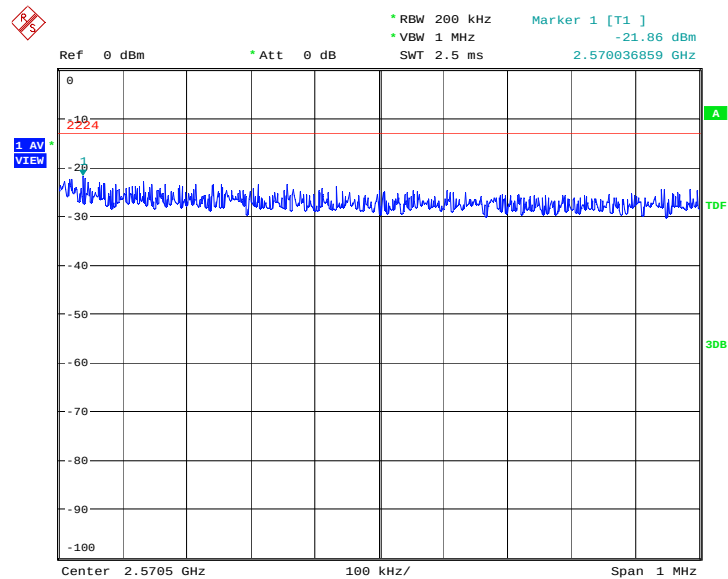


Date: 4.MAY.2014 17:40:05

LOW BAND EDGE BLOCK-16QAM

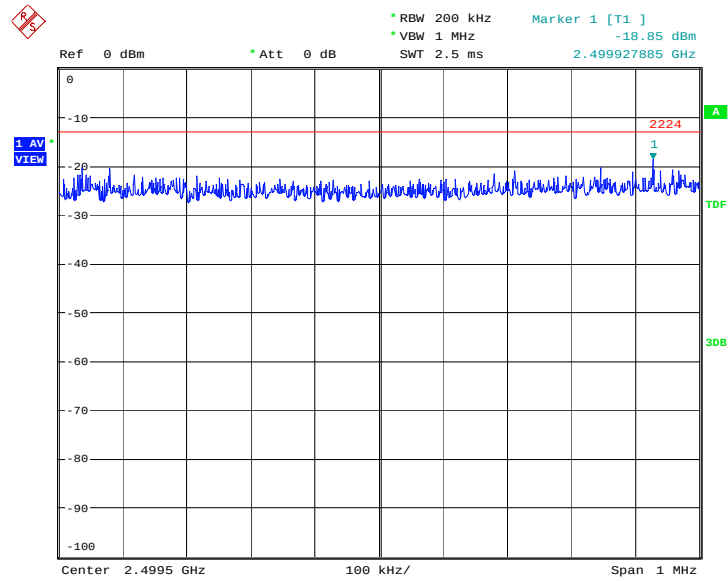

Date: 4.MAY.2014 17:38:06

HIGH BAND EDGE BLOCK-16QAM

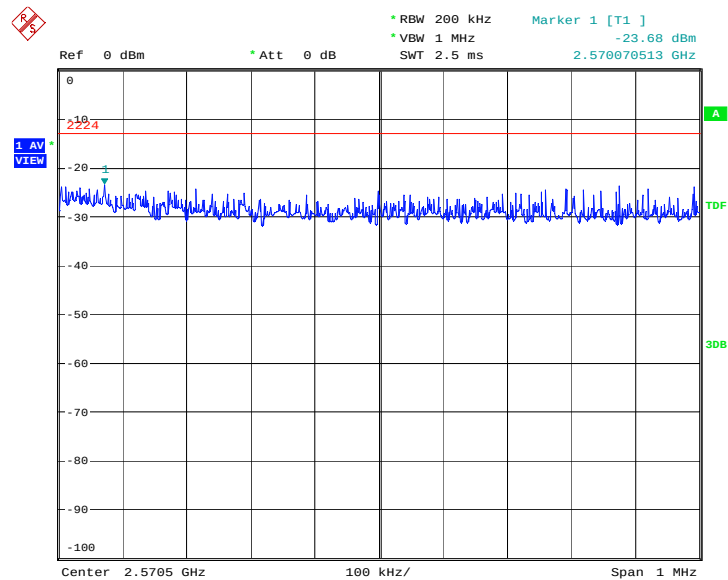

Date: 4.MAY.2014 17:40:15

A.8 CONDUCTED SPURIOUS EMISSION

Reference

FCC: CFR Part 2.1057, 27.53(h).

A.8.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

A. 8.2 Measurement Limit

Part 27.53 specifies that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A. 8.3 Measurement result

LTE band 7, 5MHz bandwidth

QPSK: 30MHz – 1GHz


Spurious emission limit –13dBm.

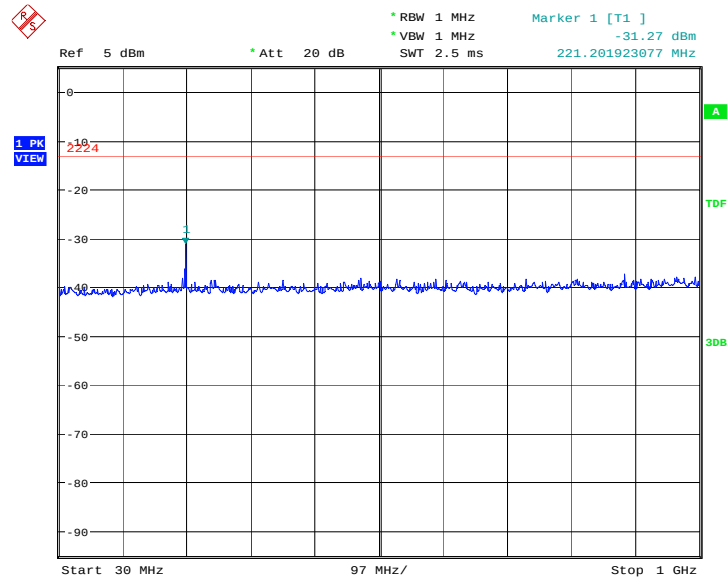

Date: 4.MAY.2014 17:43:08

QPSK: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

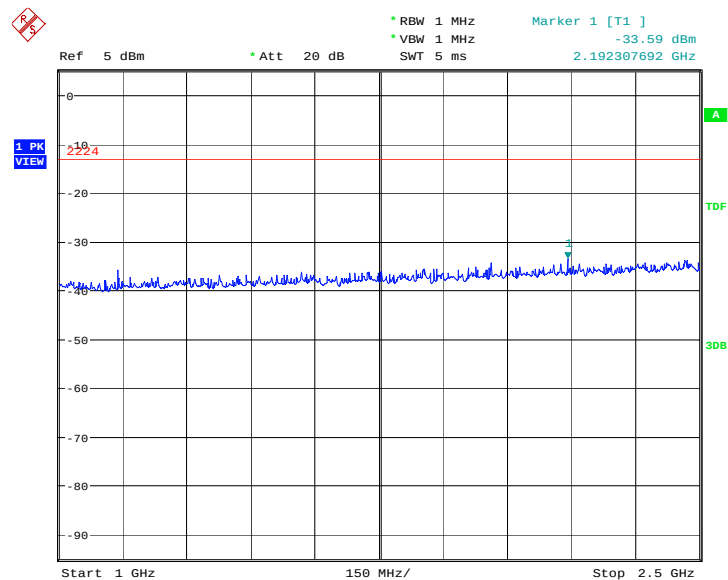

Date: 4.MAY.2014 17:43:16

QPSK: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

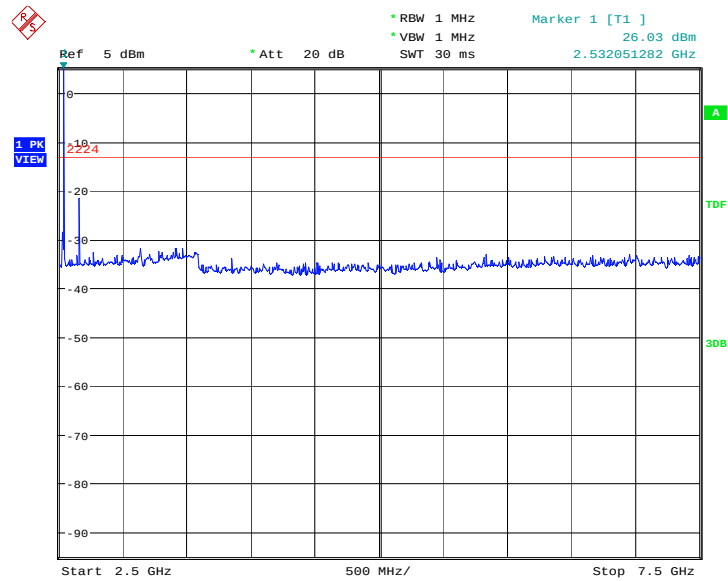

Date: 4.MAY.2014 17:43:24

QPSK: 7.5GHz –10GHz


Spurious emission limit –13dBm.

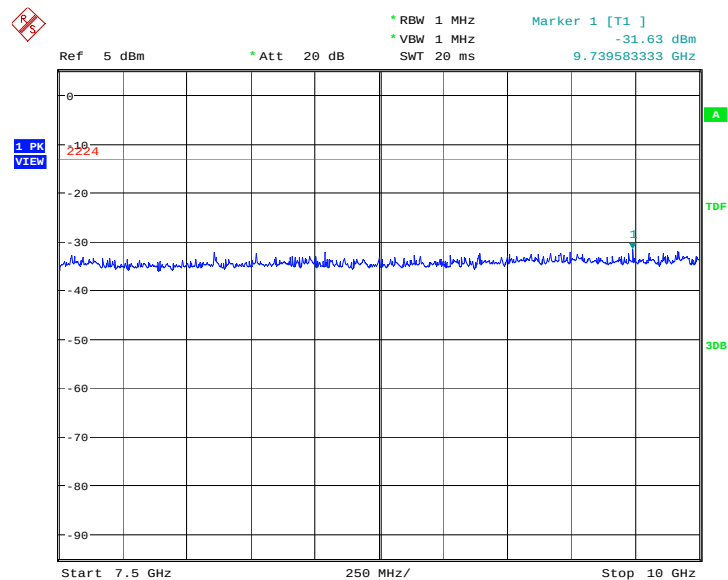

Date: 4.MAY.2014 17:43:32

QPSK: 10GHz –15GHz


Spurious emission limit –13dBm.

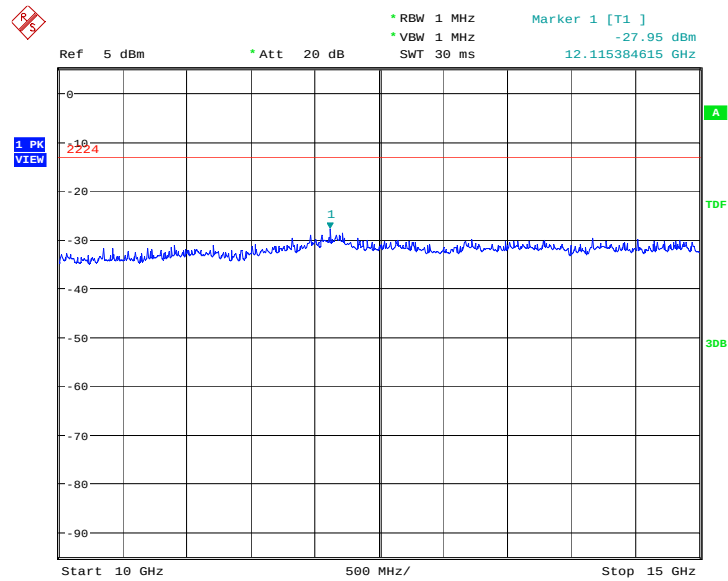

Date: 4.MAY.2014 17:43:40

QPSK: 15GHz –20GHz


Spurious emission limit –13dBm.

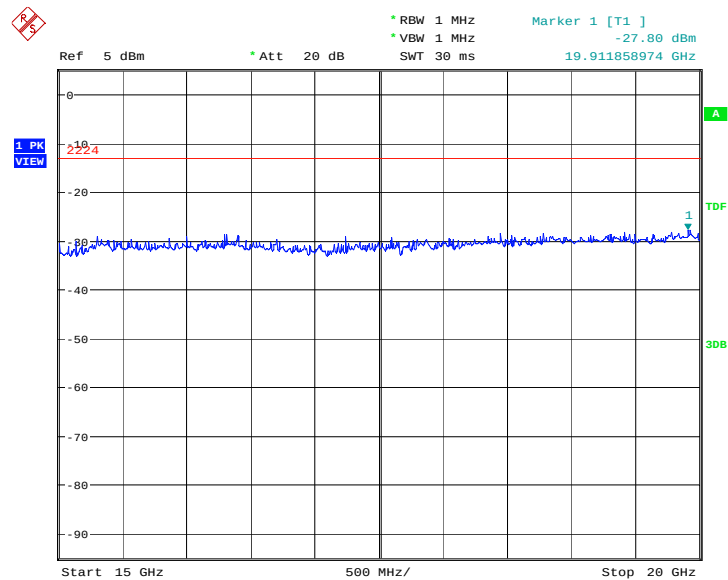

Date: 4.MAY.2014 17:43:48

QPSK: 20GHz –26GHz


Spurious emission limit –13dBm.

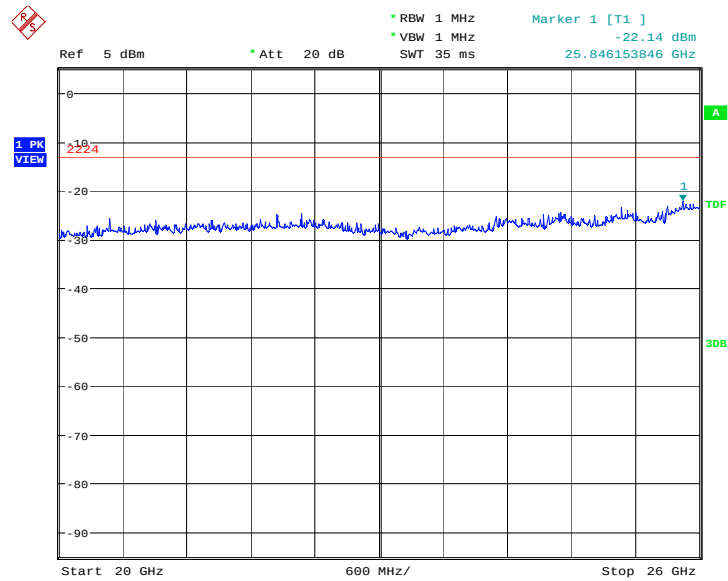

Date: 4.MAY.2014 17:43:56

16QAM: 30MHz – 1GHz


Spurious emission limit –13dBm.

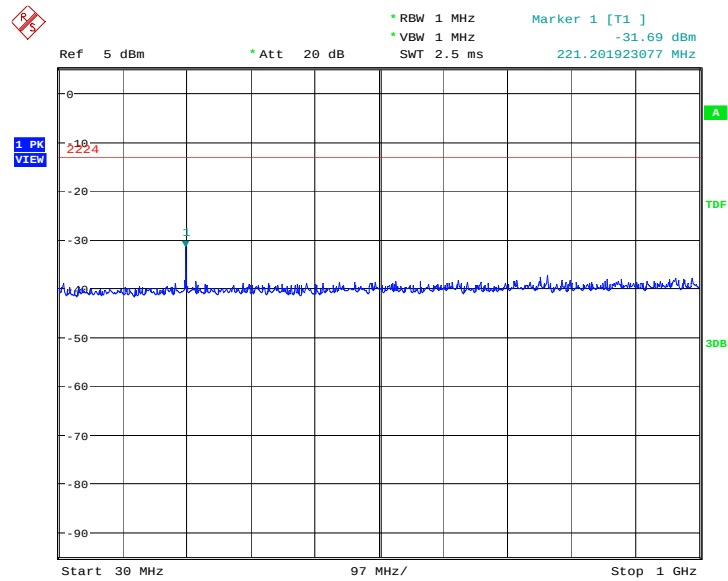

Date: 4.MAY.2014 17:44:06

16QAM: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

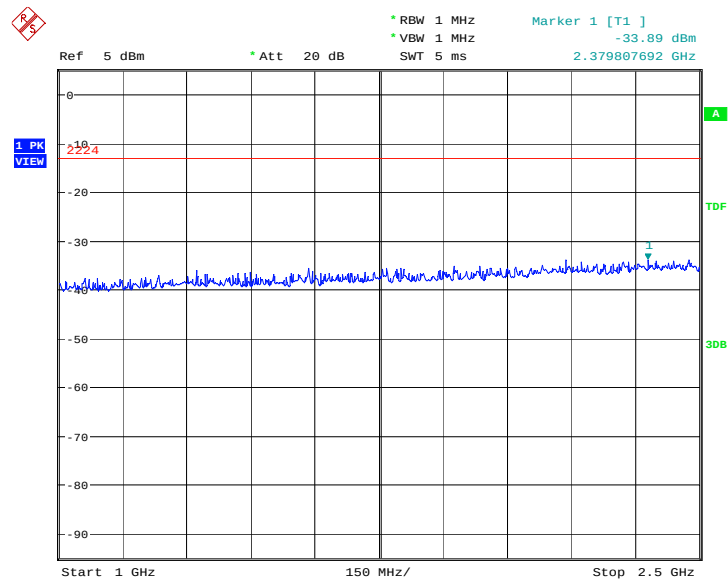

Date: 4.MAY.2014 17:44:14

16QAM: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

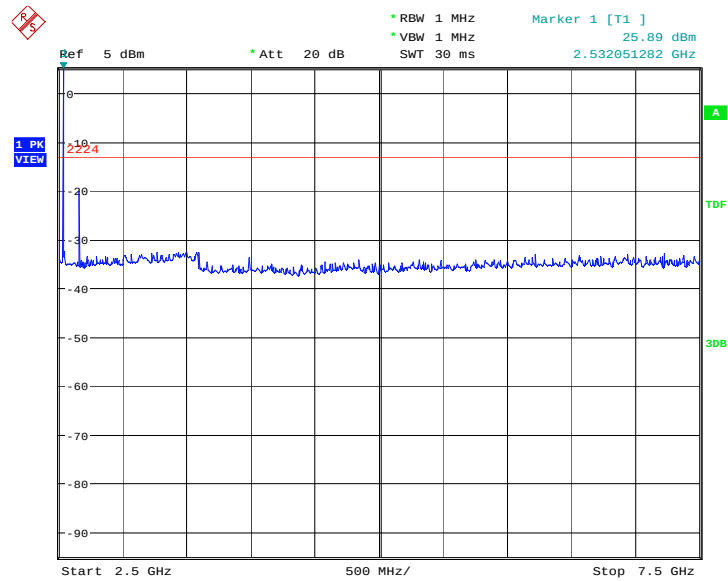

Date: 4.MAY.2014 17:44:22

16QAM: 7.5GHz –10GHz


Spurious emission limit –13dBm.

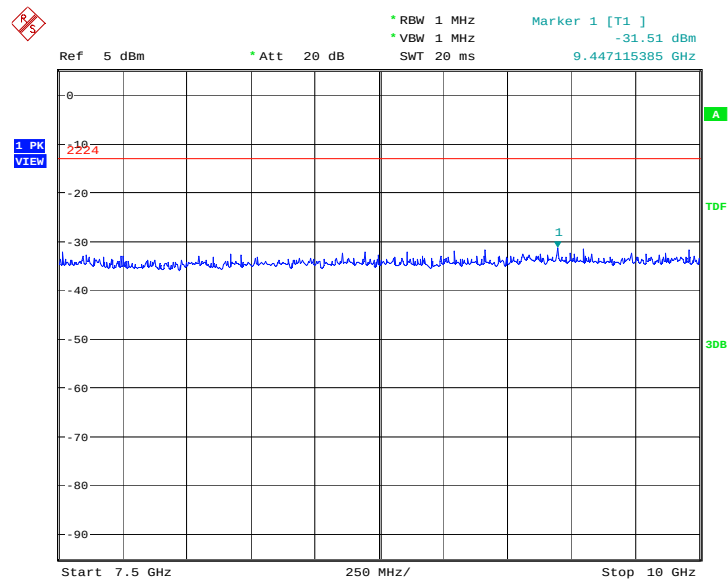

Date: 4.MAY.2014 17:44:30

16QAM: 10GHz –15GHz


Spurious emission limit –13dBm.

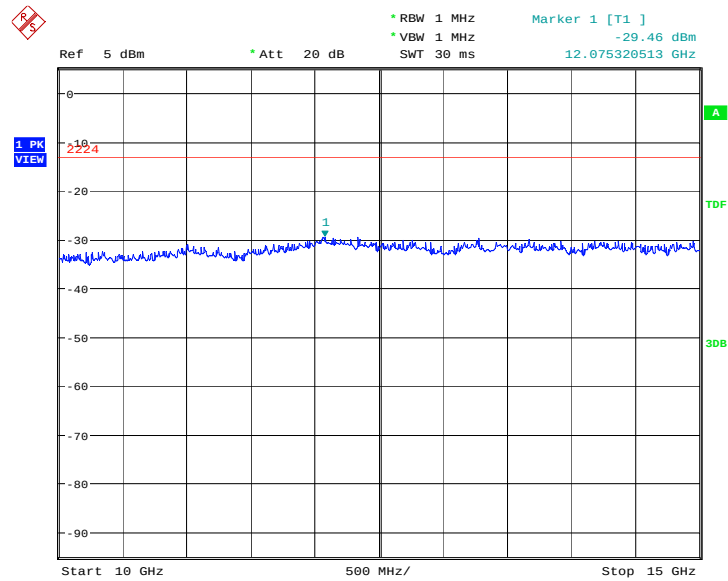

Date: 4.MAY.2014 17:44:38

16QAM: 15GHz –20GHz


Spurious emission limit –13dBm.

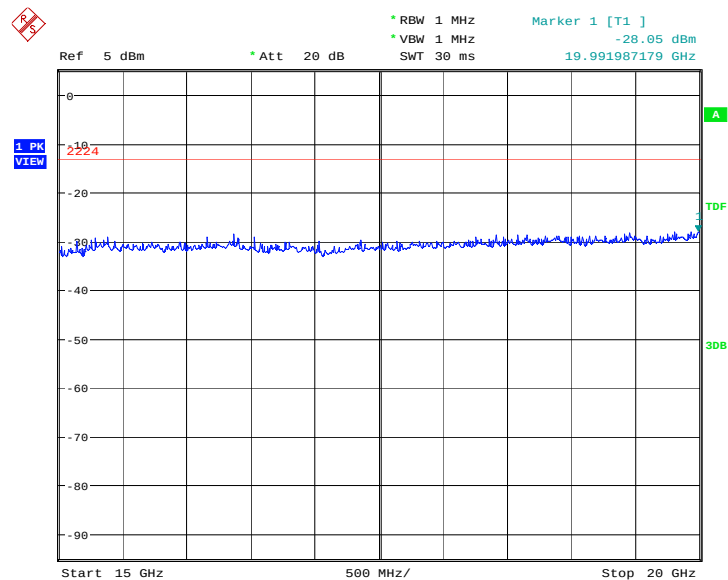

Date: 4.MAY.2014 17:44:46

16QAM: 20GHz –26GHz

Spurious emission limit –13dBm.

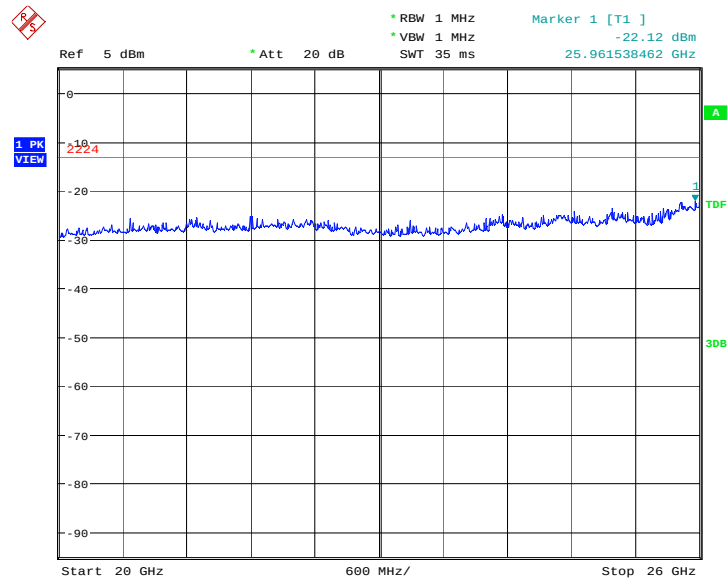

Date: 4.MAY.2014 17:44:54

END OF REPORT