


FCC Test Report

APPLICANT : TCT Mobile Limited
EQUIPMENT : GSM Quad-band / UMTS Quad-band /
LTE Penta-band mobile phone
BRAND NAME : Alcatel
MODEL NAME : 6039J
FCC ID : RAD545
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was testing completed on Apr. 09, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2009 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Louis Wu / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification subjective to this standard.....	6
1.5. Accessories and Support Equipment.....	7
1.6. Modification of EUT	8
1.7. Test Location.....	8
1.8. Applicable Standards	8
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1. Test Mode	9
2.2. Connection Diagram of Test System	13
2.3. Support Unit used in test configuration and system.....	15
2.4. EUT Operation Test Setup.....	15
3. TEST RESULT.....	16
3.1. Test of AC Conducted Emission Measurement	16
3.2. Test of Radiated Emission Measurement	22
4. LIST OF MEASURING EQUIPMENT	30
5. UNCERTAINTY OF EVALUATION	31
APPENDIX A. SETUP PHOTOGRAPHS	
APPENDIX B. PRODUCT EQUALITY DECLARATION	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC511303-03	Rev. 01	This is a variant product of 6039A. According to the product equality declaration as Appendix B which is provided by client, only the radiated emission which is presented in section 2.2 need for test, other test items can refer to sporton report number FC511303 (Model name: 6039A; FCC ID: RAD544).	Apr. 28, 2015



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 4.68 dB at 0.500 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 2.09 dB at 34.850 MHz for Quasi-Peak

1. General Description

1.1. Applicant

TCT Mobile Limited

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P. R. China. 201203

1.2. Manufacturer

TCT Mobile Limited

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P. R. China. 201203

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	GSM Quad-band / UMTS Quad-band / LTE Penta-band mobile phone
Brand Name	Alcatel
Model Name	6039J
FCC ID	RAD545
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ HSPA+(Downlink Only)/DC-HSDPA/LTE/NFC WLAN2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0+EDR/Bluetooth v4.1 LE
IMEI Code	Conduction: 014368000002652 for 6039A Radiation: 014368000003239 for 6039A Radiation: 867023020051062 for spot check SIM1 867023020051070 for spot check SIM2
HW Version	BAB34D000GCX
SW Version	vA7M
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples is only for memory, sample 1 is 1GB capacity and sample 2 is 1.5GB capacity.

1.4. Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM850 : 824.2 MHz ~ 848.8 MHz GSM1900 : 1850.2 MHz ~ 1909.8MHz WCDMA Band V : 826.4 MHz ~ 846.6 MHz WCDMA Band II : 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Rx Frequency	GSM850 : 869.2 MHz ~ 893.8 MHz GSM1900 : 1930.2 MHz ~ 1989.8 MHz WCDMA Band V : 871.4 MHz ~ 891.6 MHz WCDMA Band II : 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz Glonass : 1602 MHz + $n \times 0.5625\text{MHz}$ ($n=-7, -6, -5, \dots, 0, \dots, 6$) NFC : 13.56 MHz
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GPS: PIFA Antenna Glonass: PIFA Antenna NFC : Loop Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA: QPSK (Uplink) HSDPA / DC-HSDAP: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (Downlink Only) DC-HSDPA: 64QAM LTE: QPSK / 16QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth v4.1 LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GPS / Glonass : BPSK NFC: ASK

1.5. Accessories and Support Equipment

Specification of Accessory				
AC Adapter 1	Brand Name	ACE-Tenpao	Model Name	UC11US
	Power Rating	I/P: 100-240Vac, 200mA, O/P: 5Vdc, 1000mA		
	P/N	CBA0058AG0C2		
AC Adapter 2	Brand Name	ACE-Yingju	Model Name	UC11US
	Power Rating	I/P: 100-240Vac, 200mA, O/P: 5Vdc, 1000mA		
	P/N	CBA0058AG0C3		
Battery 1	Brand Name	ALCATEL onetouch	Model Name	TLp020K2
	Power Rating	3.8Vdc, 2000mAh		
	P/N	CAC2000023C2		
Battery 2	Brand Name	ALCATEL onetouch	Model Name	TLp020KJ
	Power Rating	3.8Vdc, 2000mAh		
	P/N	CAC2000025CJ		
USB Cable 1	Brand Name	ACE-Shenhua	Model Name	CDA0000025C1
	Signal Line Type	1.10m shielded without core		
USB Cable 2	Brand Name	ACE-Juwei	Model Name	CDA0000025C2
	Signal Line Type	1.10m shielded without core		
USB Cable 3	Brand Name	ACE-Juwei	Model Name	CDA0000025C8
	Signal Line Type	1.10m shielded without core		
Earphone 1	Brand Name	ACE-Lianyun	Model Name	CCB0023A10C2
	Signal Line Type	1.16m non-shielded without core		
Earphone 2	Brand Name	ACE-JBL	Model Name	J22C
	Signal Line Type	1.38m non-shielded without core		
Earphone 3	Brand Name	ACE-Lianyun	Model Name	CCB0023A11C2
	Signal Line Type	1.26m non-shielded without core		
Earphone 4	Brand Name	ACE-JBL	Model Name	CCA0001A10C9
	Signal Line Type	1.28m non-shielded without core		



1.6. Modification of EUT

No modifications are made to the EUT during all test items.

1.7. Test Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	CO01-KS	03CH01-KS	149928

Note: The test site complies with ANSI C63.4 2009 requirement.

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2009

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	☒	☒	☒
2.	Data application transferred mode (EUT connected with notebook)	☒	☒	☒

Abbreviations:

- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz

Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1/2	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Charging from Adapter 1) + Battery 1 + Earphone 1 + Camera for Sample 1<Fig.1> Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 2 + MPEG4 for Sample 1<Fig.1> Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 3 + NFC On for Sample 1<Fig.1> Mode 4: WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 4 + Glonass Rx for Sample 1<Fig.2> Mode 5: LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx for Sample 1<Fig.3> Mode 6: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx for Sample 1<Fig.3> Mode 7: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 3 (Charging from Adapter 2) + Battery 2 + Earphone 2 + MPEG4 for Sample 1<Fig.1> Mode 8: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 2 + MPEG4 for Sample 2<Fig.1>

Radiated Emissions < 1GHz	1/2	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Charging from Adapter 1) + Battery 1 + Earphone 1 + Camera for Sample 1<Fig.1> Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 2 + MPEG4 for Sample 1<Fig.1> Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 3 + NFC On for Sample 1<Fig.1> Mode 4: WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 4 + Glonass Rx for Sample 1<Fig.2> Mode 5: LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx for Sample 1<Fig.3> Mode 6: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx for Sample 1<Fig.3> Mode 7: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 3 (Charging from Adapter 2) + Battery 2 + Earphone 2 + MPEG4 for Sample 1<Fig.1> Mode 8: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 2 + MPEG4 for Sample 2<Fig.1>
Radiated Emissions ≥ 1GHz	1/2	Mode 1: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 2 + MPEG4 for Sample 1<Fig.1> Mode 2: LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx for Sample 1<Fig.3>
Remark: 1. The worst case of AC is mode 2; and the USB Link mode of AC is mode 5, the test data of these modes were reported. 2. The worst case of RE < 1G is mode 2; and the USB Link mode of RE is mode 5, the test data of these modes were reported. 3. Link with notebook means data application transferred mode between EUT and notebook.		

2.2. Spot Check Test Mode

Item	EUT Configuration	Test Condition	
		EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	☒	Note 1
2.	Data application transferred mode (EUT connected with notebook)	☒	☒

Abbreviations:


- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz

Note 1: Testing for this mode is not required or not the worst case.


Remark: For signal above 1GHz, the worst case was test item 2.

Test Items	EUT Configure Mode	Function Type
Radiated Emissions < 1GHz	1/2	Mode 1: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 2 + MPEG4 + SIM 2 for Sample 1 <Fig.1> Mode 2: LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx + SIM 1 for Sample 1 <Fig.3>
Radiated Emissions ≥ 1GHz	2	Mode 1: LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx + SIM 1 for Sample 1 <Fig.3>
Remark: 1. The worst case of RE < 1G is mode 2; only the test data of this mode was reported. 2. Link with notebook means data application transferred mode between EUT and notebook.		


2.3. Connection Diagram of Test System

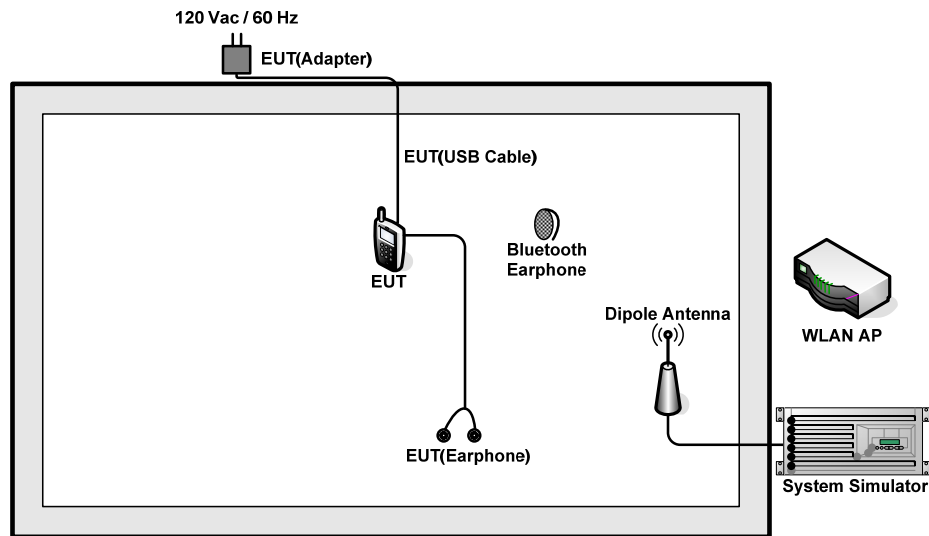

<Fig.1>

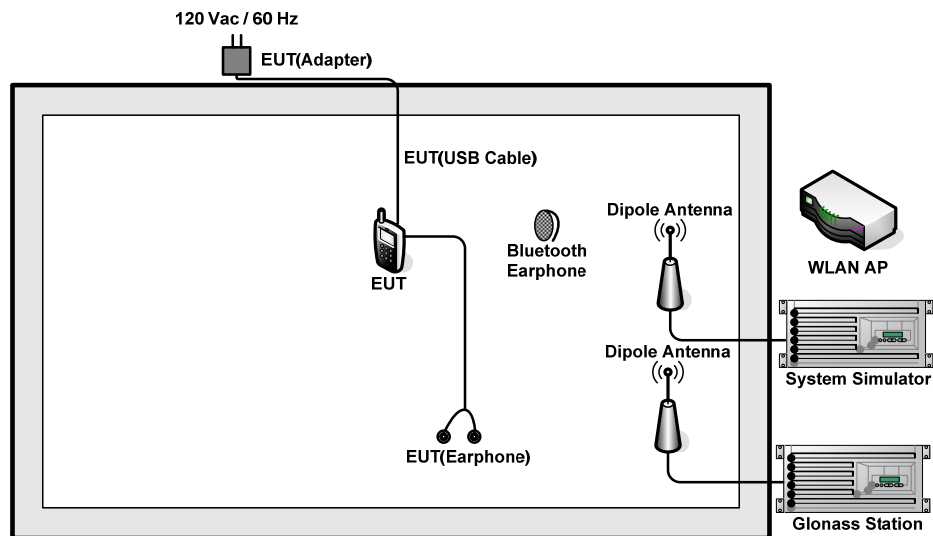

<Fig.2>

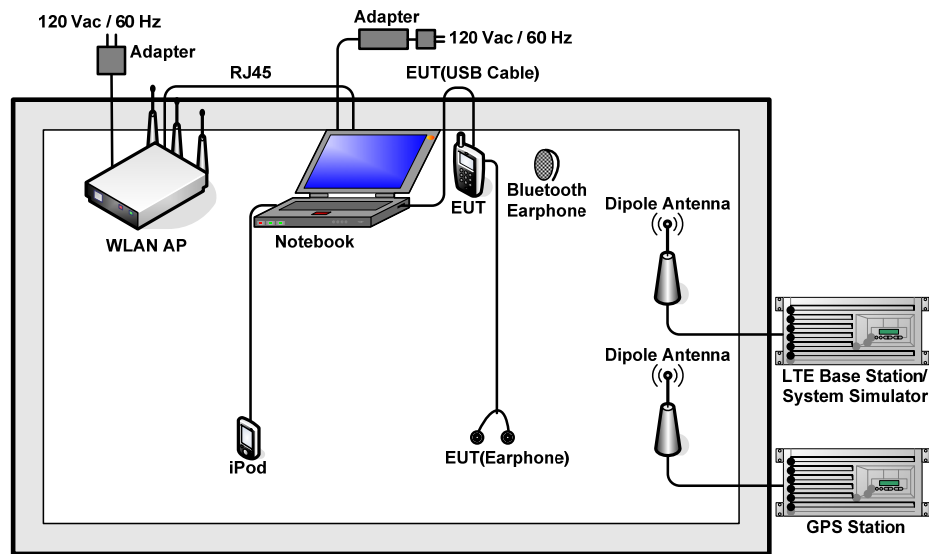

<Fig.3>

2.4. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
3.	GPS Station	ADIVIC	MP9000	N/A	N/A	Unshielded, 1.8 m
4.	Glonass Station	RACELOGIC	RLLS03-2RP	N/A	N/A	Unshielded, 1.8 m
5.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
6.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
7.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
8.	iPod	Apple	A1199	FCC DoC	Unshielded, 1.2 m	N/A

2.5. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and was in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Notebook and EUT via USB cable.
2. Execute "Video Player" to play MPEG4 files.
3. Turn on camera to capture images.
4. Turn on NFC function
5. Turn on GPS/Glonass function to make the EUT receive continuous signals from GPS/Glonass station.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup

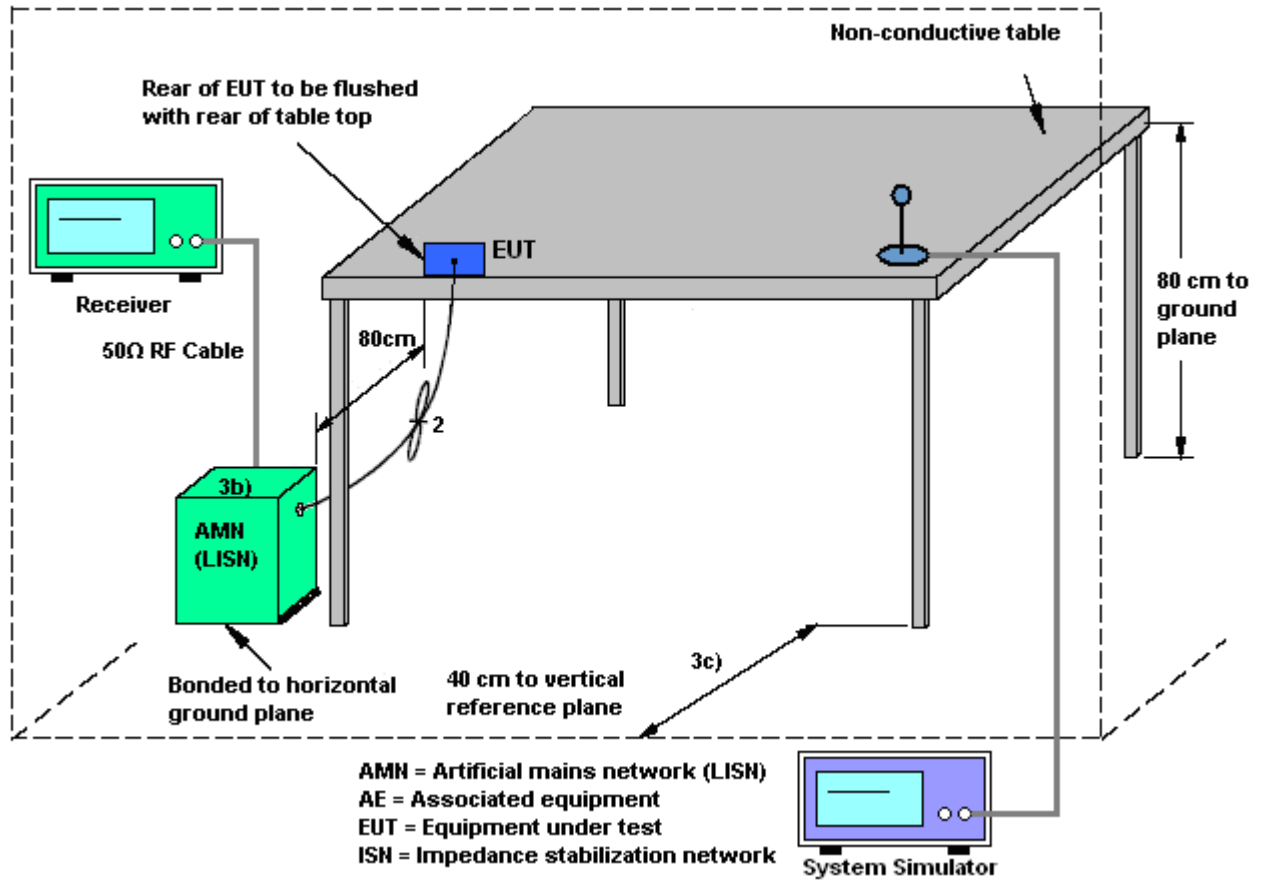

3.1.5 Test Result of AC Conducted Emission


Test Mode :	Mode 2	Temperature :	22~24℃
Test Engineer :	Eko Guan	Relative Humidity :	30~33%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 2 + MPEG4 for Sample 1		

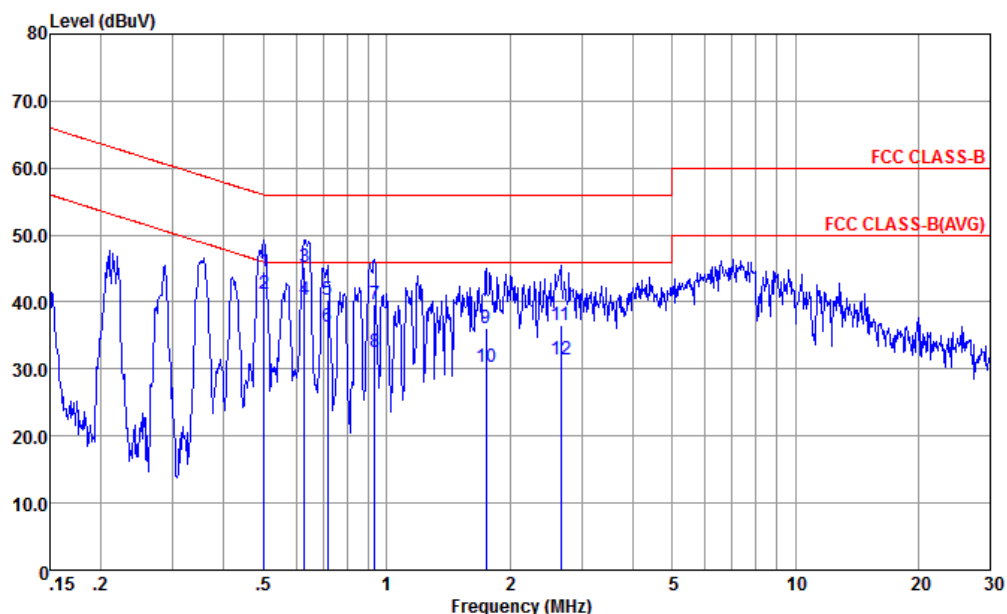

Site : CO01-KS
 Condition : FCC CLASS-B LISN-L20140306 LINE
 Project : (FC) 511303
 mode : Mode 2

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.50	44.62	-11.38	56.00	33.80	0.20	10.62	QP
2 *	0.50	41.32	-4.68	46.00	30.50	0.20	10.62	Average
3	0.63	45.33	-10.67	56.00	34.50	0.20	10.63	QP
4	0.63	40.23	-5.77	46.00	29.40	0.20	10.63	Average
5	0.72	40.34	-15.66	56.00	29.50	0.20	10.64	QP
6	0.72	36.34	-9.66	46.00	25.50	0.20	10.64	Average
7	0.93	39.56	-16.44	56.00	28.80	0.11	10.65	QP
8	0.93	32.56	-13.44	46.00	21.80	0.11	10.65	Average
9	1.75	36.09	-19.91	56.00	25.30	0.10	10.69	QP
10	1.75	30.29	-15.71	46.00	19.50	0.10	10.69	Average
11	2.66	36.57	-19.43	56.00	25.70	0.12	10.75	QP
12	2.66	31.37	-14.63	46.00	20.50	0.12	10.75	Average

Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	30~33%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 2 + MPEG4 for Sample 1		

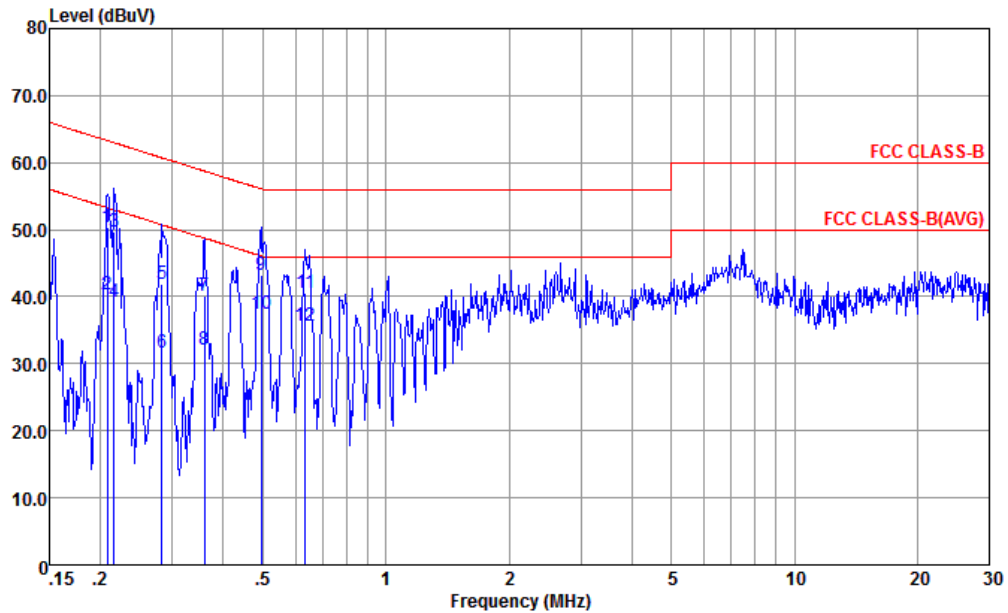


Site : CO01-KS
 Condition : FCC CLASS-B LISN-N20140306 NEUTRAL
 Project : (FC) 511303
 mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
		dBuV	dB	dBuV	dBuV	dB	dB	
1	0.21	50.39	-12.88	63.27	38.91	0.98	10.50	QP
2	0.21	40.29	-12.98	53.27	28.81	0.98	10.50	Average
3	0.22	49.68	-13.28	62.96	38.20	0.97	10.51	QP
4	0.22	39.28	-13.68	52.96	27.80	0.97	10.51	Average
5	0.28	41.86	-18.86	60.72	30.50	0.80	10.56	QP
6	0.28	31.66	-19.06	50.72	20.30	0.80	10.56	Average
7	0.36	40.19	-18.55	58.74	29.10	0.48	10.61	QP
8	0.36	31.99	-16.75	48.74	20.90	0.48	10.61	Average
9	0.49	43.23	-12.87	56.10	32.31	0.30	10.62	QP
10 *	0.49	37.43	-8.67	46.10	26.51	0.30	10.62	Average
11	0.63	40.46	-15.54	56.00	29.60	0.22	10.64	QP
12	0.63	35.66	-10.34	46.00	24.80	0.22	10.64	Average



Test Mode :	Mode 5	Temperature :	22~24℃
Test Engineer :	Eko Guan	Relative Humidity :	30~33%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx for Sample 1		

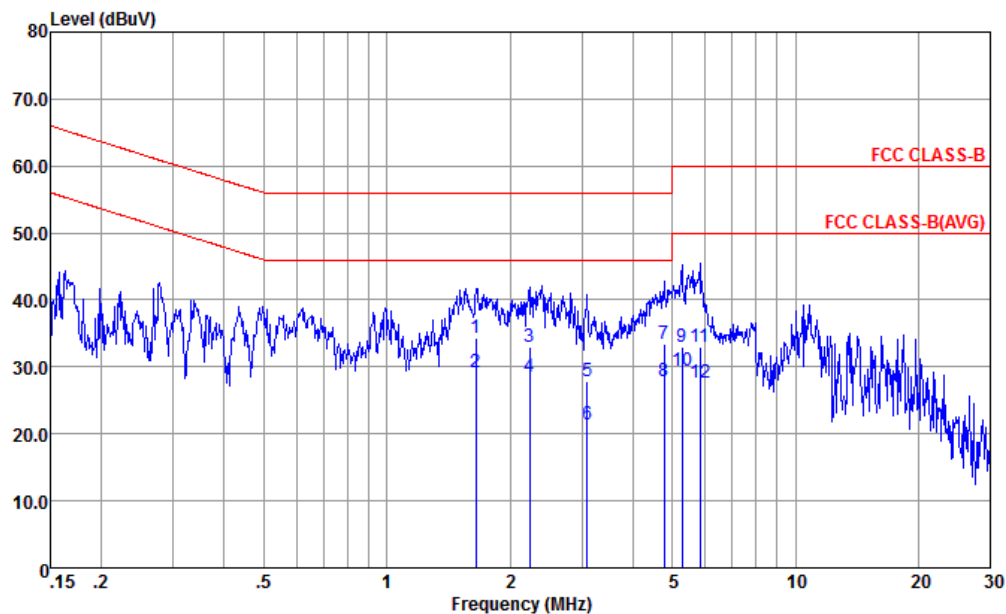


Site : CO01-KS
Condition : FCC CLASS-B LISN-L20140306 LINE
Project : (FC) 511303
mode : Mode 5

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	1.65	34.29	-21.71	56.00	23.50	0.10	10.69	QP
2 *	1.65	29.09	-16.91	46.00	18.30	0.10	10.69	Average
3	2.24	33.02	-22.98	56.00	22.20	0.11	10.71	QP
4	2.24	28.52	-17.48	46.00	17.70	0.11	10.71	Average
5	3.09	27.84	-28.16	56.00	16.91	0.14	10.79	QP
6	3.09	21.34	-24.66	46.00	10.41	0.14	10.79	Average
7	4.77	33.34	-22.66	56.00	22.30	0.20	10.84	QP
8	4.77	27.94	-18.06	46.00	16.90	0.20	10.84	Average
9	5.28	32.96	-27.04	60.00	21.90	0.20	10.86	QP
10	5.28	29.46	-20.54	50.00	18.40	0.20	10.86	Average
11	5.84	32.87	-27.13	60.00	21.80	0.20	10.87	QP
12	5.84	27.57	-22.43	50.00	16.50	0.20	10.87	Average



Test Mode :	Mode 5	Temperature :	22~24℃
Test Engineer :	Eko Guan	Relative Humidity :	30~33%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx for Sample 1		

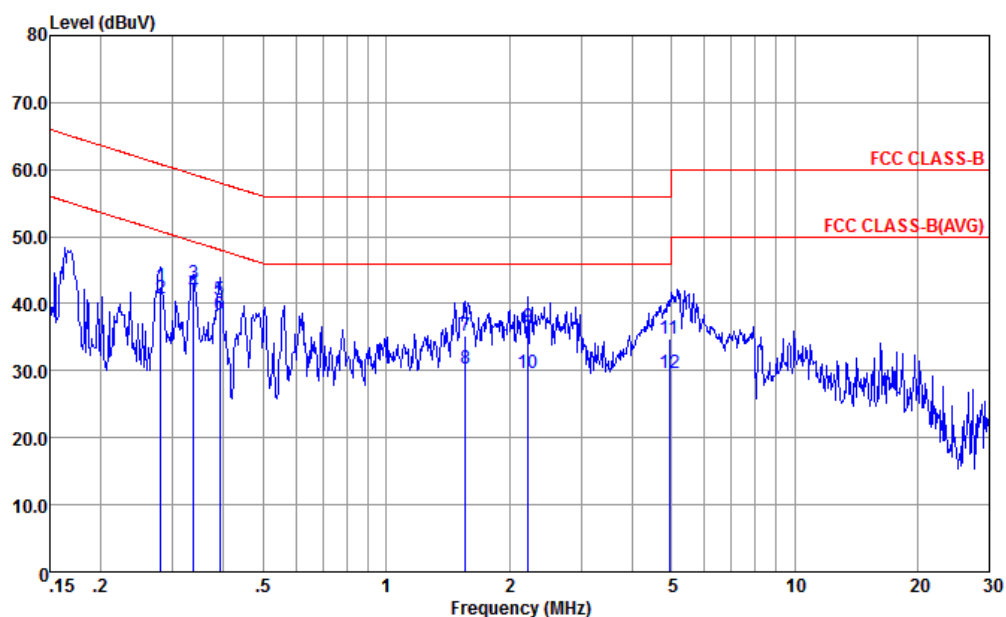

Site : CO01-KS
Condition : FCC CLASS-B LISN-N20140306 NEUTRAL
Project : (FC) 511303
mode : Mode 5

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.28	42.56	-18.25	60.81	31.19	0.81	10.56	QP
2	0.28	40.76	-10.05	50.81	29.39	0.81	10.56	Average
3	0.34	42.95	-16.32	59.27	31.80	0.55	10.60	QP
4 *	0.34	41.65	-7.62	49.27	30.50	0.55	10.60	Average
5	0.39	40.54	-17.49	58.03	29.50	0.42	10.62	QP
6	0.39	38.34	-9.69	48.03	27.30	0.42	10.62	Average
7	1.56	35.29	-20.71	56.00	24.50	0.10	10.69	QP
8	1.56	30.39	-15.61	46.00	19.60	0.10	10.69	Average
9	2.22	36.62	-19.38	56.00	25.80	0.11	10.71	QP
10	2.22	29.62	-16.38	46.00	18.80	0.11	10.71	Average
11	4.93	34.85	-21.15	56.00	23.80	0.20	10.85	QP
12	4.93	29.55	-16.45	46.00	18.50	0.20	10.85	Average

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

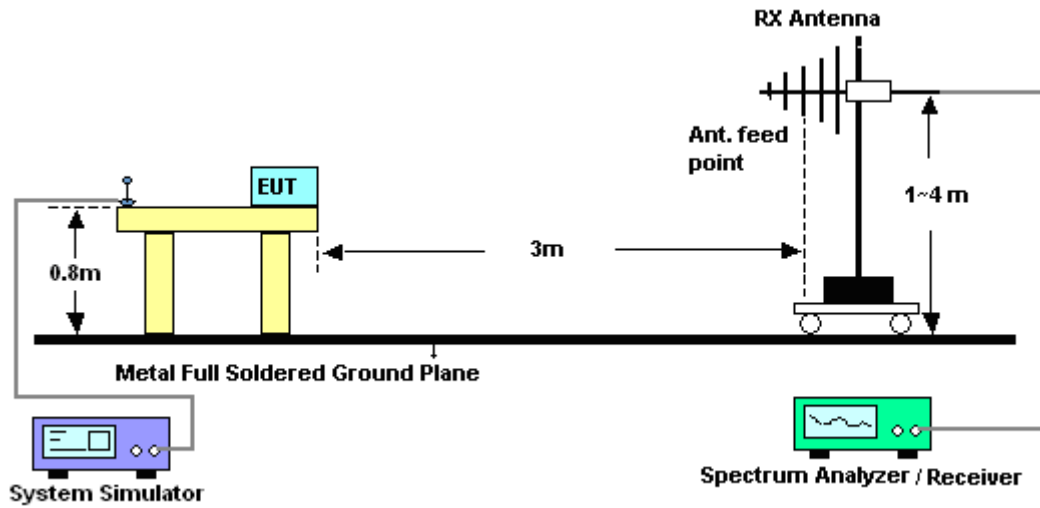


For radiated emissions above 1GHz

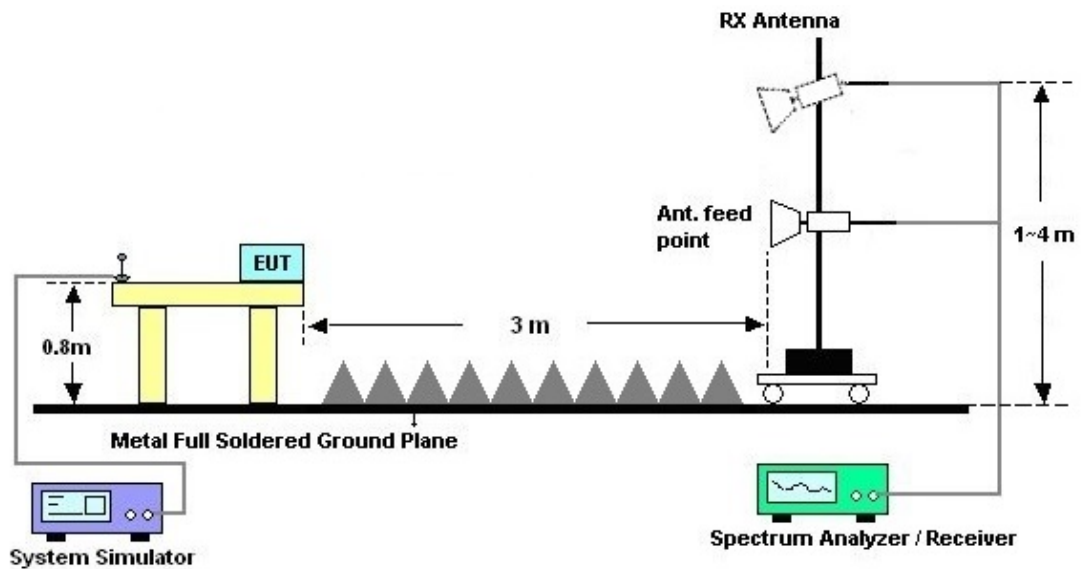



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 2	Temperature :	22~23°C
Test Engineer :	Love Zhao	Relative Humidity :	40~41%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 2 + MPEG4 for Sample 1		

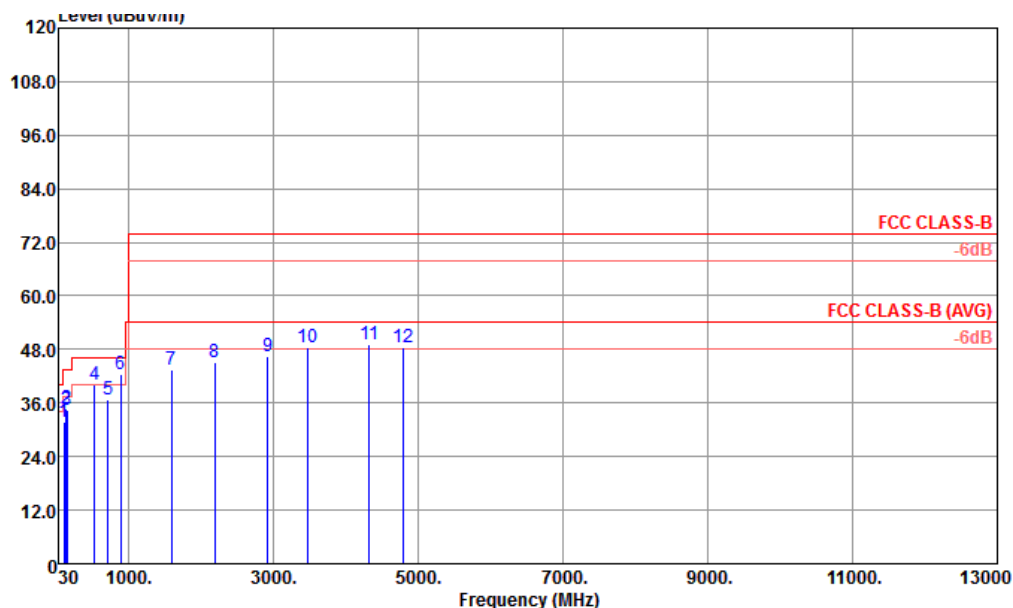


Site : 03CH01-KS
Condition : FCC CLASS-B 3m LF_ANT_37879 HORIZONTAL
Project : (FC)511303
Mode : 2

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	107.60	31.92	-11.58	43.50	52.16	11.36	1.04	32.64	---	---	Peak
2	141.55	34.63	-8.87	43.50	54.33	11.63	1.23	32.56	---	---	Peak
3	150.28	34.53	-8.97	43.50	53.95	11.70	1.44	32.56	---	---	Peak
4	533.43	39.98	-6.02	46.00	51.20	18.30	2.64	32.16	100	57	Peak
5	710.94	36.64	-9.36	46.00	45.45	20.04	3.12	31.97	---	---	Peak
6	889.42	42.30	-3.70	46.00	48.22	22.34	3.50	31.76	---	---	Peak
7	1592.00	43.43	-30.57	74.00	41.71	30.94	3.88	33.10	---	---	Peak
8	2192.00	45.07	-28.93	74.00	41.10	32.58	4.56	33.17	---	---	Peak
9	2922.00	46.31	-27.69	74.00	40.98	33.63	5.26	33.56	---	---	Peak
10	3464.00	48.40	-25.60	74.00	42.11	34.28	5.70	33.69	---	---	Peak
11	4326.00	49.08	-24.92	74.00	41.54	35.06	6.22	33.74	---	---	Peak
12	4794.00	48.56	-25.44	74.00	40.68	35.17	6.51	33.80	---	---	Peak



Test Mode :	Mode 2	Temperature :	22~23°C
Test Engineer :	Love Zhao	Relative Humidity :	40~41%
Test Distance :	3m	Polarization :	Vertical
Function Type :	GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable 2 (Charging from Adapter 2) + Battery 2 + Earphone 2 + MPEG4 for Sample 1		

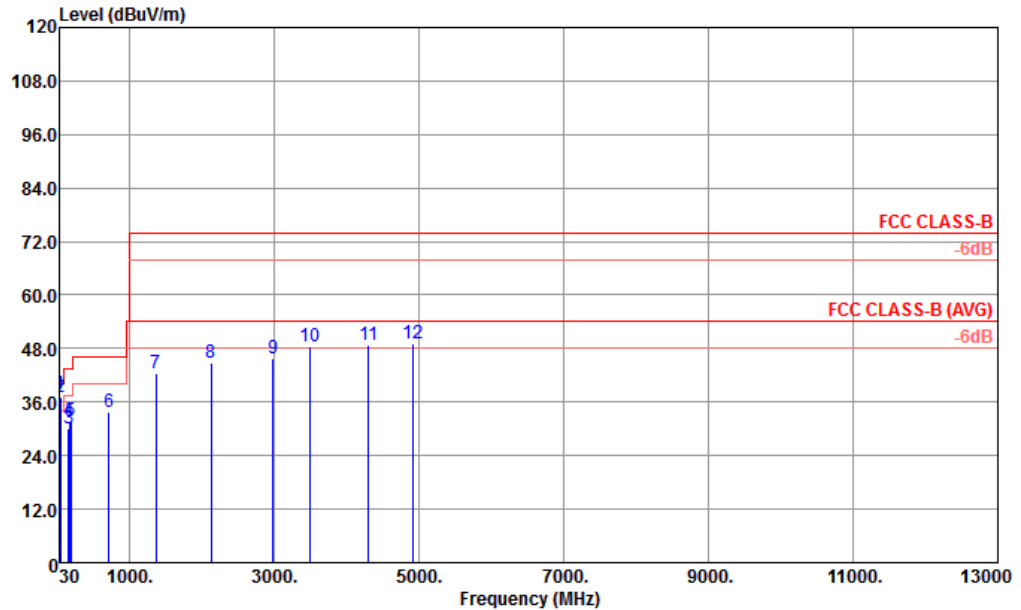


Site : 03CH01-KS
Condition : FCC CLASS-B 3m LF_ANT_37879 VERTICAL
Project : (FC)511303
Mode : 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	cm	deg	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 !	34.85	37.91	-2.09	40.00	53.00	16.75	0.79	32.63	100	343 QP
2 !	45.52	36.98	-3.02	40.00	57.60	11.25	0.79	32.66	100	176 QP
3	155.13	30.05	-13.45	43.50	49.66	11.51	1.44	32.56	---	--- Peak
4	169.68	31.60	-11.90	43.50	51.72	10.95	1.44	32.51	---	--- Peak
5	187.14	31.73	-11.77	43.50	52.48	10.28	1.44	32.47	---	--- Peak
6	710.94	33.85	-12.15	46.00	42.66	20.04	3.12	31.97	---	--- Peak
7	1360.00	42.55	-31.45	74.00	42.63	29.66	3.55	33.29	---	--- Peak
8	2132.00	44.69	-29.31	74.00	40.85	32.53	4.46	33.15	---	--- Peak
9	2980.00	45.87	-28.13	74.00	40.51	33.67	5.27	33.58	---	--- Peak
10	3498.00	48.47	-25.53	74.00	42.09	34.35	5.73	33.70	---	--- Peak
11	4300.00	48.83	-25.17	74.00	41.32	35.05	6.18	33.72	---	--- Peak
12	4908.00	49.06	-24.94	74.00	41.05	35.19	6.62	33.80	---	--- Peak



Test Mode :	Mode 5	Temperature :	22~23°C
Test Engineer :	Love Zhao	Relative Humidity :	40~41%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx for Sample 1		

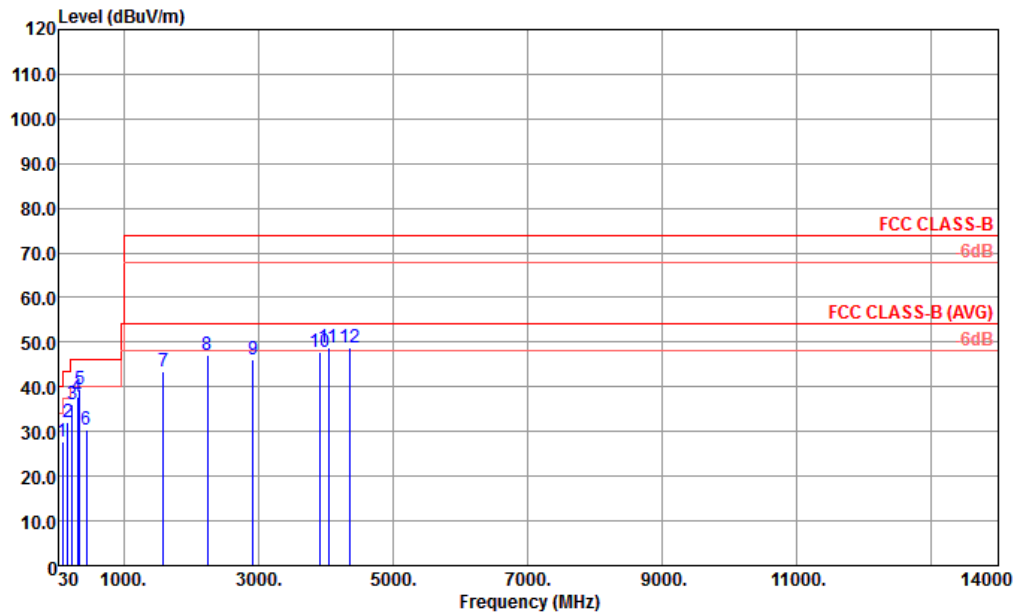


Site : 03CH01-KS
Condition : FCC CLASS-B 3m LF_ANT_23182 HORIZONTAL
Project : (FC) 511303
Mode : 5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor	dB	dB	cm	deg
1	90.14	27.64	-15.86	43.50	51.48	8.90	0.88	33.62	---	Peak
2	164.83	32.25	-11.25	43.50	55.25	9.40	1.18	33.58	---	Peak
3	239.52	36.23	-9.77	46.00	56.74	11.51	1.44	33.46	---	Peak
4	314.21	37.91	-8.09	46.00	56.29	13.36	1.63	33.37	---	Peak
5	344.28	39.58	-6.42	46.00	56.87	14.37	1.70	33.36	100	41 Peak
6	450.01	30.35	-15.65	46.00	45.31	16.30	1.95	33.21	---	Peak
7	1594.00	43.49	-30.51	74.00	41.77	30.94	3.88	33.10	---	Peak
8	2242.00	47.22	-26.78	74.00	43.12	32.64	4.65	33.19	---	Peak
9	2924.00	46.00	-28.00	74.00	40.67	33.63	5.26	33.56	---	Peak
10	3908.00	47.78	-26.22	74.00	40.42	34.92	6.05	33.61	---	Peak
11	4044.00	48.89	-25.11	74.00	41.37	35.01	6.13	33.62	---	Peak
12	4366.00	48.81	-25.19	74.00	41.26	35.06	6.24	33.75	---	Peak



Test Mode :	Mode 5	Temperature :	22~23°C
Test Engineer :	Love Zhao	Relative Humidity :	40~41%
Test Distance :	3m	Polarization :	Vertical
Function Type :	LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx for Sample 1		

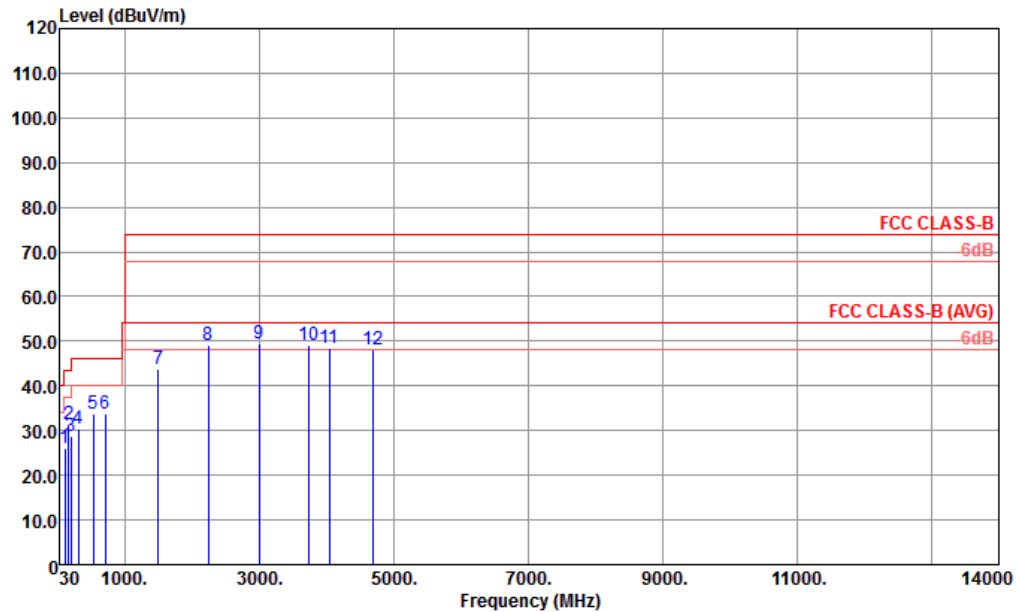


Site : 03CH01-KS
Condition : FCC CLASS-B 3m LF_ANT_23182 VERTICAL
Project : (FC) 511303
Mode : 5

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	115.36	26.00	-17.50	43.50	46.81	11.80	1.00	33.61	---	---	Peak
2	165.80	31.48	-12.02	43.50	54.51	9.36	1.18	33.57	100	108	Peak
3	197.81	28.89	-14.61	43.50	52.25	8.91	1.29	33.56	---	---	Peak
4	314.21	30.49	-15.51	46.00	48.87	13.36	1.63	33.37	---	---	Peak
5	533.43	33.60	-12.40	46.00	46.42	18.14	2.09	33.05	---	---	Peak
6	711.91	33.81	-12.19	46.00	44.85	19.41	2.41	32.86	---	---	Peak
7	1500.00	43.87	-30.13	74.00	42.86	30.35	3.76	33.10	---	---	Peak
8	2246.00	48.98	-25.02	74.00	44.88	32.64	4.65	33.19	---	---	Peak
9	3000.00	49.33	-24.67	74.00	43.99	33.70	5.24	33.60	---	---	Peak
10	3748.00	48.99	-25.01	74.00	41.96	34.76	5.92	33.65	---	---	Peak
11	4048.00	48.37	-25.63	74.00	40.85	35.01	6.13	33.62	---	---	Peak
12	4700.00	48.19	-25.81	74.00	40.44	35.15	6.40	33.80	---	---	Peak

3.2.6. Spot Check Test Result of Radiated Emission

Test Mode :	Mode 2	Temperature :	21~22°C
Test Engineer :	Jack Wang	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx for Sample 1		

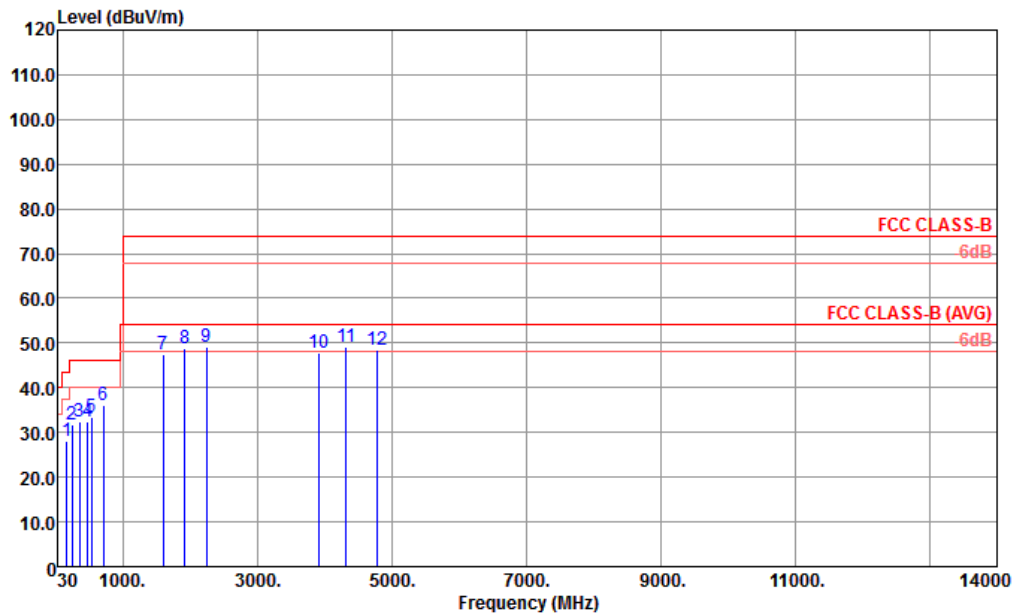


Site : 03CH01-KS
 Condition : FCC CLASS-B 3m LF_ANT_23182 HORIZONTAL
 Project : (FC) 511303-03
 Mode : 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	cm	deg	
			dB	dBuV/m	dBuV	dB/m	dB	dB		
1	165.80	28.05	-15.45	43.50	51.08	9.36	1.18	33.57	---	Peak
2	243.40	31.60	-14.40	46.00	51.91	11.70	1.44	33.45	---	Peak
3	355.92	32.27	-13.73	46.00	49.29	14.63	1.71	33.36	---	Peak
4	480.08	32.55	-13.45	46.00	46.84	16.87	2.00	33.16	---	Peak
5	533.43	33.48	-12.52	46.00	46.30	18.14	2.09	33.05	---	Peak
6	711.91	36.01	-9.99	46.00	47.05	19.41	2.41	32.86	100	14 Peak
7	1596.00	47.51	-26.49	74.00	45.79	30.94	3.88	33.10	---	Peak
8	1924.00	48.87	-25.13	74.00	45.53	32.17	4.27	33.10	---	Peak
9	2242.00	49.29	-24.71	74.00	45.19	32.64	4.65	33.19	---	Peak
10	3910.00	47.82	-26.18	74.00	40.46	34.92	6.05	33.61	---	Peak
11	4326.00	49.08	-24.92	74.00	41.54	35.06	6.22	33.74	---	Peak
12	4794.00	48.56	-25.44	74.00	40.68	35.17	6.51	33.80	---	Peak



Test Mode :	Mode 2	Temperature :	22~23°C
Test Engineer :	Love Zhao	Relative Humidity :	40~41%
Test Distance :	3m	Polarization :	Vertical
Function Type :	LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable 1 (Data Link with Notebook) + Battery 2 + Earphone 2 + GPS Rx for Sample 1		

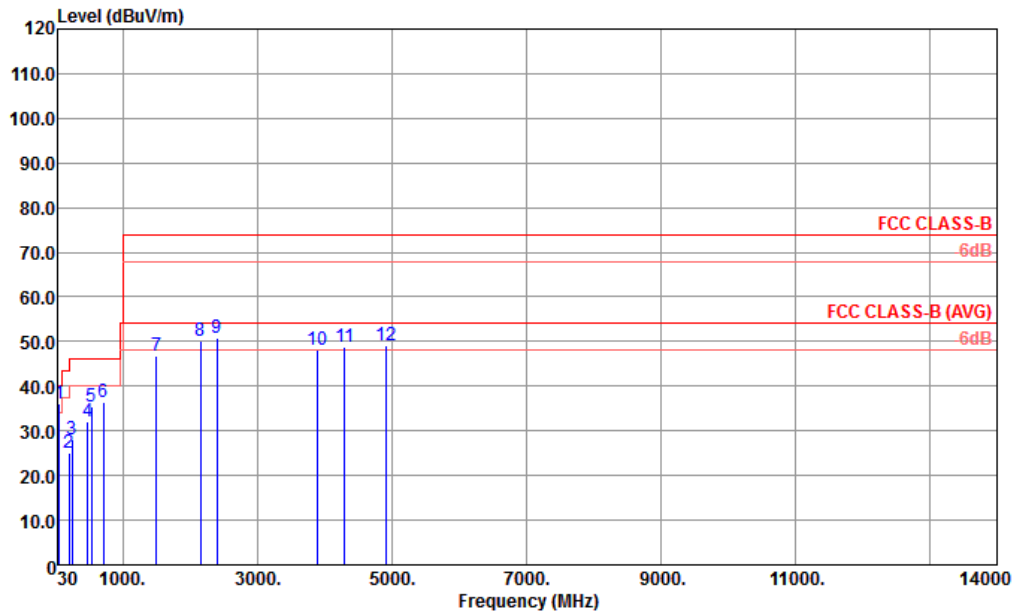

Site : 03CH01-KS
Condition : FCC CLASS-B 3m LF_ANT_23182 VERTICAL
Project : (FC) 511303-03
Mode : 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor	Factor	cm	deg	
1	59.10	36.14	-3.86	40.00	63.56	5.44	0.72	33.58	100	84 Peak
2	197.81	24.91	-18.59	43.50	48.27	8.91	1.29	33.56	---	Peak
3	244.37	27.93	-18.07	46.00	48.19	11.75	1.44	33.45	---	Peak
4	480.08	32.20	-13.80	46.00	46.49	16.87	2.00	33.16	---	Peak
5	533.43	35.53	-10.47	46.00	48.35	18.14	2.09	33.05	---	Peak
6	711.91	36.44	-9.56	46.00	47.48	19.41	2.41	32.86	---	Peak
7	1500.00	46.84	-27.16	74.00	45.83	30.35	3.76	33.10	---	Peak
8	2154.00	50.04	-23.96	74.00	46.19	32.55	4.45	33.15	---	Peak
9	2400.00	50.73	-23.27	74.00	46.32	32.86	4.81	33.26	---	Peak
10	3904.00	48.18	-25.82	74.00	40.82	34.92	6.05	33.61	---	Peak
11	4300.00	48.83	-25.17	74.00	41.32	35.05	6.18	33.72	---	Peak
12	4908.00	49.06	-24.94	74.00	41.05	35.19	6.62	33.80	---	Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	May 04, 2014	Mar. 09, 2015	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	Mar. 09, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	Mar. 09, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	Mar. 09, 2015	Oct. 24, 2015	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Oct. 25, 2014	Feb. 23, 2015~ Apr. 02, 2015	Oct. 24, 2015	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 04, 2014	Feb. 23, 2015~ Apr. 02, 2015	May 03, 2015	Radiation (03CH01-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30Mhz-2Ghz	Sep. 13, 2014	Feb. 23, 2015~ Apr. 02, 2015	Sep. 12, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2014	Feb. 23, 2015~ Apr. 02, 2015	Nov. 07, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Feb. 23, 2015~ Apr. 02, 2015	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02371	1GHz~26.5GHz	Oct. 28, 2014	Feb. 23, 2015~ Apr. 02, 2015	Oct. 27, 2015	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 23, 2015~ Apr. 02, 2015	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Feb. 23, 2015~ Apr. 02, 2015	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Feb. 23, 2015~ Apr. 02, 2015	NCR	Radiation (03CH01-KS)



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5 dB
--	--------



Appendix B. Product Equality Declaration



General: 6039J is a variant product of 6039A

- Protocol Stack changes: No
- MMS/STK/USAT/USIM changes: No
- DM/SUPL/VT/FUMO/SWP/HCI: No (indicated the changed items if yes)
- Other changes detailed:

- Band changes: No
- PCB Layout changes: No
- Main RF components changes:

[illegible][illegible]

	Antenna	AP	Modem	Transceiver	Power Amplifier	Balun	Band pass filter	Diplexer
Bluetooth	No	No	No	No	No	No	No	No
Wi-Fi	No	No	No	No	No	No	No	No

- FM changes: No
- LCD/ Speaker/ Camera/ Vibrator changes: No (indicated the changed items if yes)
- Other changes detailed:

● **MECHANICAL MODIFICATIONS:**

- Use new metal front/back cover or keypad: No
- Mechanical shell changes:
 - Whole size of EUT: No
 - Distance of Ear reference point to bottom of handset: No
 - Other trinkets to change the surface of handset: No
- Other changes detailed: replace SD card slot by the second SIM card slot on enclosure

APPROVED BY:

Project Manager:

Signature:

Date:

Danielji

2015.3.19