

FCC CERTIFICATION TEST REPORT

FOR

Applicant	:	Giant Telecom Limited
Address	:	33/F, AIA Kowloon Tower, Landmark East, 100 How Ming Street, Kwun Tong , Kowloon
Equipment under Test	:	Two-way radio
Model No	:	R500
Trade Mark	:	OLYMPIA
FCC ID	:	RAQLYAE
Manufacturer	:	DONGGUAN WISETRONICS TELECOM EQUIPMENT CO. LTD
Address	:	Elite Industrial City, Melin District, Dailing Mount Town, Dongguan Guangdong, China

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City,
Guangdong Province, China, 523808

Tel: +86-0769-22891499 [Http://www.dgddt.com](http://www.dgddt.com)

REPORT

TABLE OF CONTENTS

	Test report declares.....	4
1.	Summary of test results	5
2.	General test information.....	6
2.1.	Description of EUT	6
2.2.	Accessories of EUT.....	6
2.3.	Channel Information	6
2.4.	Block diagram of EUT configuration for test	7
2.5.	Test environment conditions	7
2.6.	Test laboratory.....	8
2.7.	Measurement uncertainty	8
3.	Maximum Transmitter Power.....	9
3.1.	Test equipment	9
3.2.	Block diagram of test setup	9
3.3.	Limits	9
3.4.	Test Procedure.....	10
3.5.	Test Result.....	11
4.	Occupied bandwidth and emission mask	13
4.1.	Test equipment	13
4.2.	Block diagram of test setup	13
4.3.	Limits	13
4.4.	Test Procedure.....	13
4.5.	Test Result.....	14
4.6.	Original test data	15
5.	Modulation Characteristics	18
5.1.	Test equipment	18
5.2.	Block diagram of test setup	18
5.3.	Limits	19
5.4.	Test Procedure.....	19
5.5.	Test Result.....	20
6.	Radiated Spurious Emission.....	27
6.1.	Test equipment	27
6.2.	Block diagram of test setup	27
6.3.	Limit	28
6.4.	Test Procedure.....	28
6.5.	Test result	29
7.	Frequency Stability	31

7.1.	Test equipment	31
7.2.	Block diagram of test setup	31
7.3.	Limits	31
7.4.	Test Procedure.....	31
7.5.	Test result	32
8.	Power Line Conducted Emission	35
8.1.	Test equipment	35
8.2.	Block diagram of test setup	35
8.3.	Power Line Conducted Emission Limits(Class B).....	35
8.4.	Test Procedure.....	35
8.5.	Test Result.....	36
9.	Test setup photograph	39
10.	Photos of the EUT	41

TEST REPORT DECLARE

Applicant	:	Giant Telecom Limited
Address	:	33/F, AIA Kowloon Tower, Landmark East, 100 How Ming Street, Kwun Tong , Kowloon
Equipment under Test	:	Two-way radio
Model No	:	R500
Trade Mark	:	OLYMPIA
FCC ID	:	RAQLYAE
Manufacturer	:	DONGGUAN WISETRONICS TELECOM EQUIPMENT CO. LTD
Address	:	Elite Industrial City, Melin District, Dailing Mount Town, Dongguan Guangdong, China

Test Standard Used: FCC Rules and Regulations Part 95; FCC Rules and Regulations Part 2; FCC Rules and Regulations Part 15B;

Test procedure used: TIA-603-D:2010; ANSI C63.4:2009

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No:	DDT-RE140472		
Date of Test:	2014/05/19~2014/05/22	Date of Report:	2014/06/13

Prepared By:


Leo Liu/Engineer

Approved By:


Jamy Yu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

1. Summary of test results

Description of Test Item	Standard	Results
Maximum Transmitter Power	FCC Part 95.639	PASS
Modulation Characteristics	FCC Part 2.1047, FCC Part 95.637	PASS
Occupied Bandwidth and Emission Mask	FCC Part 2.1049, FCC Part 95.633, FCC Part 95.635	PASS
Radiated Spurious Emission	FCC Part 95.635	PASS
Frequency Stability	FCC Part 2.1055, FCC Part 95.621 FCC Part 95.626	PASS
Power line conducted emissions	FCC Part 15: 2012	PASS

2. General test information

2.1. Description of EUT

EUT* Name	:	Two-way radio
Model Number	:	R500
Trade Mark	:	OLYMPIA
EUT function description	:	Please reference user manual of this device
Power supply	:	DC 4.5V from battery or DC 5V from power adapter
Operation frequency range	:	GMRS:462.55MHz-462.7250MHz; 467.5500MHz-467.7250MHz FRS: 467.5625MHz-467.7125MHz
Modulation type	:	FM
Max Tx deviation	:	2.5KHz
Emission type	:	F3E
Antenna Type	:	Integral
Date of Receipt	:	2014/05/06
Sample Type	:	Series production

Note1: EUT is the ab. of equipment under test.

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number or Type	Other
Power adapter	HSK Electronics Technology Co.,Ltd	HSK-SAD0900200	/
Earphone	/	/	1.2m

2.3. Channel Information


CH #	FREQ (MHz)	CODE	TYPE	CH #	FREQ (MHz)	CODE	TYPE
1	462.5625	ANY	GMRS	26	462.7125	29	GMRS
2	462.5875	ANY	GMRS	27	462.55	26	GMRS
3	462.6125	ANY	GMRS	28	462.6	23	GMRS
4	462.6375	ANY	GMRS	29	462.65	20	GMRS
5	462.6625	ANY	GMRS	30	462.7	17	GMRS
6	462.6875	ANY	GMRS	31	462.5875	39	GMRS
7	462.7125	ANY	GMRS	32	462.6375	42	GMRS
8	467.5625	ANY	FRS	33	462.6875	45	GMRS
9	467.5875	ANY	FRS	34	467.5625	48	FRS
10	467.6125	ANY	FRS	35	467.6125	51	FRS
11	467.6375	ANY	FRS	36	467.6625	54	FRS
12	467.6625	ANY	FRS	37	467.7125	57	FRS
13	467.6875	ANY	FRS	38	462.575	60	GMRS
14	467.7125	ANY	FRS	39	462.625	63	GMRS

CH #	FREQ (MHz)	CODE	TYPE	CH #	FREQ (MHz)	CODE	TYPE
15	462.55	ANY	GMRS	40	462.675	66	GMRS
16	462.575	ANY	GMRS	41	462.725	69	GMRS
17	462.6	ANY	GMRS	42	462.5625	14	GMRS
18	462.625	ANY	GMRS	43	462.6125	11	GMRS
19	462.65	ANY	GMRS	44	462.6625	8	GMRS
20	462.675	ANY	GMRS	45	462.7125	5	GMRS
21	462.7	ANY	GMRS	46	462.55	2	GMRS
22	462.725	ANY	GMRS	47	462.6	37	GMRS
23	462.5625	38	GMRS	48	462.65	34	GMRS
24	462.6125	35	GMRS	49	462.7	31	GMRS
25	462.6625	32	GMRS	50	462.5875	40	GMRS
15R	462.5500	ANY	RX GMRS	16R	462.5750	ANY	RX GMRS
	467.550	ANY	TX GMRS		467.5750	ANY	TX GMRS
17R	462.6000	ANY	RX GMRS	18R	462.6250	ANY	RX GMRS
	467.6000	ANY	TX GMRS		467.6250	ANY	TX GMRS
19R	462.6500	ANY	RX GMRS	20R	462.6750	ANY	RX GMRS
	467.6500	ANY	TX GMRS		467.7000	ANY	TX GMRS
21R	462.7000	ANY	RX GMRS	22R	462.7250	ANY	RX GMRS
	467.7000	ANY	TX GMRS		467.7250	ANY	TX GMRS


Note: From channel 23 to channel 50 have repeated frequency with channel 1 to channel 22, and only have different code. Channel 4, channel 11 and channel 17R were chosen for test. 15R to 22R are repeater mode channel, only have difference Rx channel and Tx channel, all other parameters as power, modulation type are same with normal mode.

2.4. Block diagram of EUT configuration for test

For Radiated emissions test, the block diagram of EUT configuration as below:



For power line conducted emissions test, the block diagram of EUT configuration as below:



2.5. Test environment conditions

Unless otherwise specified, measurements were performed within below environmental conditions

Temperature range:	21-25℃
Humidity range:	40-75%
Pressure range:	86-106kPa

2.6. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong

Province, China, 523808 Tel: +86-0769-22891499 <http://www.dgddt.com>

FCC Registration Number: 270092 Industry Canada site registration number: 10288A

2.7. Measurement uncertainty

Test Item	Uncertainty
Maximum RF output power (Radiated)	±1.5dB
Frequency Deviation	±0.05KHz
Uncertainty for radio frequency	1×10^{-9}
Frequency stability	140Hz
Temperature	±0.2℃
Humidity	±1%
DC and Low frequency voltage	±0.5%
Uncertainty for radiation emission test (30MHz-1GHz)	3.14 dB (Polarize: V)
	3.16 dB (Polarize: H)
Uncertainty for radiation emission test (1GHz to 25GHz)	2.08dB(Polarize: V)
	2.56dB (Polarize: H)
Uncertainty for radiation emission test (150KHz-30MHz)	3.21dB
Uncertainty for Power line conduction emission test	2.44dB


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Maximum Transmitter Power

3.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	R&S	FSU26	1166.1660.26	2013/11/26	1Y
2	Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	2013/11/26	1Y
3	Dipole antenna	Schwarzbeck	UHAP	1101	2013/11/26	1Y
4	Dipole antenna	Schwarzbeck	VHAP	1118	2013/11/26	1Y
5	RF Cable	R&S	R01	10403	2013/11/26	1Y
6	RF Cable	R&S	R02	10512	2013/11/26	1Y
7	RF Cable	R&S	R01	10454	2013/11/26	1Y
8	RF Cable	R&S	R02	10343	2013/11/26	1Y
9	Signal Generator	R&S	SMBV100A	1407.6004K02	2013/11/26	1Y

3.2. Block diagram of test setup

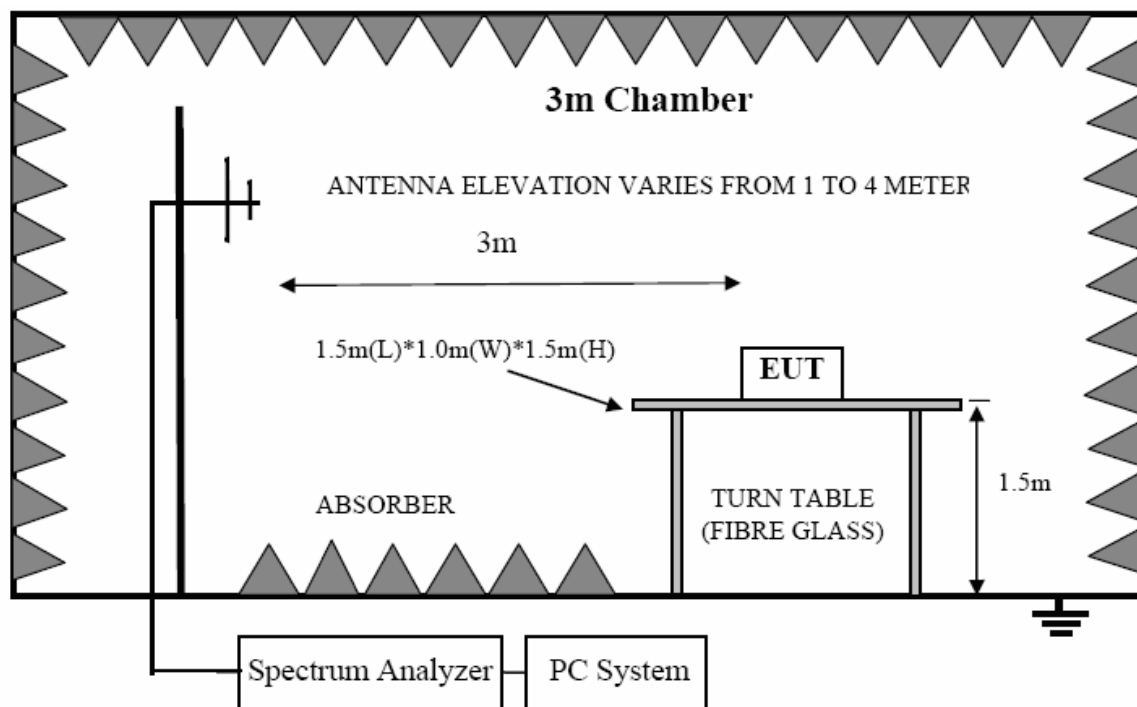

3.3. Limits

According to FCC Part 95.639:

Power output shall not exceed 0.50 Watts effective radiated power for the FRS channels. There can be no provisions for increasing the power or varying the power.

No GMRS channel, under any condition of modulation, shall exceed:

- (1) 50W Carrier power (average TP during one modulated RF cycle) when transmitting emissions type A1D, F1D, G1D, A3E, F3E, or G3E.
- (2) 50W peak envelope TP when transmitting emission type H1D, J1D, R1D, H3E, J3E or R3E.

3.4. Test Procedure

- (1) On a test site, the EUT shall be placed at 1.5m height on a wooden turntable, and in the position closest to normal use as declared by the applicant.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the frequency of the transmitter.
- (3) The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
- (4) The transmitter shall be switched on , if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until a maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The transmitter shall be replaced by a tuned dipole (substitution antenna).
- (10) The substitution antenna shall be oriented for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- (11) The substitution antenna shall be connected to a calibrated signal generator.
- (12) If necessary , the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (13) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver
- (14) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- (15) The input signal to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (16) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- (17) The measure of the ERP is the larger of the two levels recorded, at the input to the substitution antenna, corrected the gain of the substitution antenna if necessary.

3.5. Test Result

CH #	Frequency	Type	Result		FCC Limit	FCC Margin
	(MHz)		dBm	(W)	(W)	(W)
1	462.5625	GMRS	29.70	0.933	5	4.067
2	462.5875	GMRS	29.68	0.929	5	4.071
3	462.6125	GMRS	29.81	0.957	5	4.043
4	462.6375	GMRS	29.88	0.973	5	4.027
5	462.6625	GMRS	29.43	0.877	5	4.123
6	462.6875	GMRS	29.67	0.927	5	4.073
7	462.7125	GMRS	29.60	0.912	5	4.088
8	467.5625	FRS	23.12	0.205	0.5	0.295
9	467.5875	FRS	23.45	0.221	0.5	0.279
10	467.6125	FRS	23.50	0.224	0.5	0.276
11	467.6375	FRS	23.66	0.232	0.5	0.268
12	467.6625	FRS	23.41	0.219	0.5	0.281
13	467.6875	FRS	23.52	0.225	0.5	0.275
14	467.7125	FRS	23.31	0.214	0.5	0.286
15	462.55	GMRS	29.75	0.944	5	4.056
16	462.575	GMRS	29.80	0.955	5	4.045
17	462.6	GMRS	29.54	0.899	5	4.101
18	462.625	GMRS	29.67	0.927	5	4.073
19	462.65	GMRS	29.80	0.955	5	4.045
20	462.675	GMRS	29.76	0.946	5	4.054
21	462.7	GMRS	29.75	0.944	5	4.056
22	462.725	GMRS	29.41	0.873	5	4.127
23	462.5625	GMRS	29.54	0.899	5	4.101
24	462.6125	GMRS	29.73	0.940	5	4.060
25	462.6625	GMRS	29.70	0.933	5	4.067
26	462.7125	GMRS	29.41	0.873	5	4.127
27	462.55	GMRS	29.65	0.923	5	4.077
28	462.6	GMRS	29.67	0.927	5	4.073
29	462.65	GMRS	29.79	0.953	5	4.047
30	462.7	GMRS	29.61	0.914	5	4.086
31	462.5875	GMRS	29.67	0.927	5	4.073
32	462.6375	GMRS	29.51	0.893	5	4.107
33	462.6875	GMRS	29.45	0.881	5	4.119
34	467.5625	FRS	23.60	0.229	0.5	0.271
35	467.6125	FRS	23.57	0.228	0.5	0.272
36	467.6625	FRS	23.61	0.230	0.5	0.270
37	467.7125	FRS	23.61	0.230	0.5	0.270
38	462.575	GMRS	29.63	0.918	5	4.082
39	462.625	GMRS	29.54	0.899	5	4.101


40	462.675	GMRS	29.52	0.895	5	4.105
41	462.725	GMRS	29.40	0.871	5	4.129
42	462.5625	GMRS	29.61	0.914	5	4.086
43	462.6125	GMRS	29.65	0.923	5	4.077
44	462.6625	GMRS	29.54	0.899	5	4.101
45	462.7125	GMRS	29.60	0.912	5	4.088
46	462.55	GMRS	29.54	0.899	5	4.101
47	462.6	GMRS	29.64	0.920	5	4.080
48	462.65	GMRS	29.60	0.912	5	4.088
49	462.7	GMRS	29.51	0.893	5	4.107
50	462.5875	GMRS	29.69	0.931	5	4.069
15R	467.5500	GMRS	29.51	0.893	5	4.107
16R	467.5750	GMRS	29.40	0.871	5	4.129
17R	467.6000	GMRS	29.68	0.929	5	4.071
18R	467.6250	GMRS	29.52	0.895	5	4.105
19R	467.6500	GMRS	29.43	0.877	5	4.123
21R	467.7000	GMRS	29.50	0.891	5	4.109
22R	467.7250	GMRS	29.60	0.912	5	4.088
Conclusion:PASS						
Test Date : 2014/05/19				Test Engineer : Leo Liu		

4. Occupied bandwidth and emission mask

4.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	R&S	FSU	1166.1660.26	2013/11/13	1 Year
2	Attenuator	Mini-Circuits	BW-S20W2	101109	2013/11/13	1 Year
3	RF Cable	Micable	C10-01-01-1	100309	2013/11/13	1 Year
4	Audio Generator	Good Will Instrument	GAG-810	EM862120	2013/11/13	1 Year
5	Digit Multimeter	Agilent	34401A	MY47053313	2014/03/28	1 Year

4.2. Block diagram of test setup

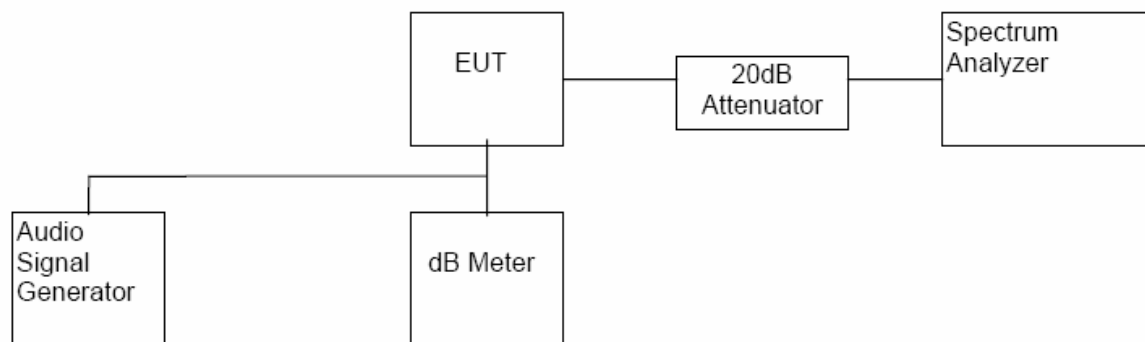

4.3. Limits

According to FCC 95.633:

For GMRS: the authorized bandwidth for emission type A1D or A3E is 8 KHz ,The authorized bandwidth for emission type F1D, G1D, F3E or G3E is 20 KHz.

For FRS: the authorized bandwidth for emission type F3E or F2D is 12.5 KHz

According to FCC 95.635:

At least 25dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50 % up to and including 100 % of the authorized bandwidth.

At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100 % up to and including 250 % of the authorized bandwidth.

At least $43 + 10 \log_{10}(T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250 %.

4.4. Test Procedure

(1). Configure EUT and assistant system according clause 4.2

- (2). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).
- (3). Set SPA Center Frequency = fundamental frequency, RBW=VBW= 300 Hz, Span =20 KHz.
- (4). Measure the -20 dB bandwidth of modulated signal.

4.5. Test Result

Occupied Bandwidth:


CH	Freq (MHz)	Type	Occupied Bandwidth	Limit
CH4	462.6375	GMRS	6.20KHz	20KHz
CH11	467.6375	FRS	6.25KHz	12.5KHz
17R	467.6000	GMRS	5.577KHz	20KHz
Conclusion:PASS				
Test Date : 2014/05/19			Test Engineer : Leo Liu	

Emission mask:


CH	Freq (MHz)	Type	Emission mask result
CH4	462.6375	GMRS	PASS
CH11	467.6375	FRS	PASS
17R	467.6000	GMRS	PASS
Test Date : 2014/05/19			Test Engineer : Leo Liu

4.6. Original test data


Occupied Bandwidth CH4:

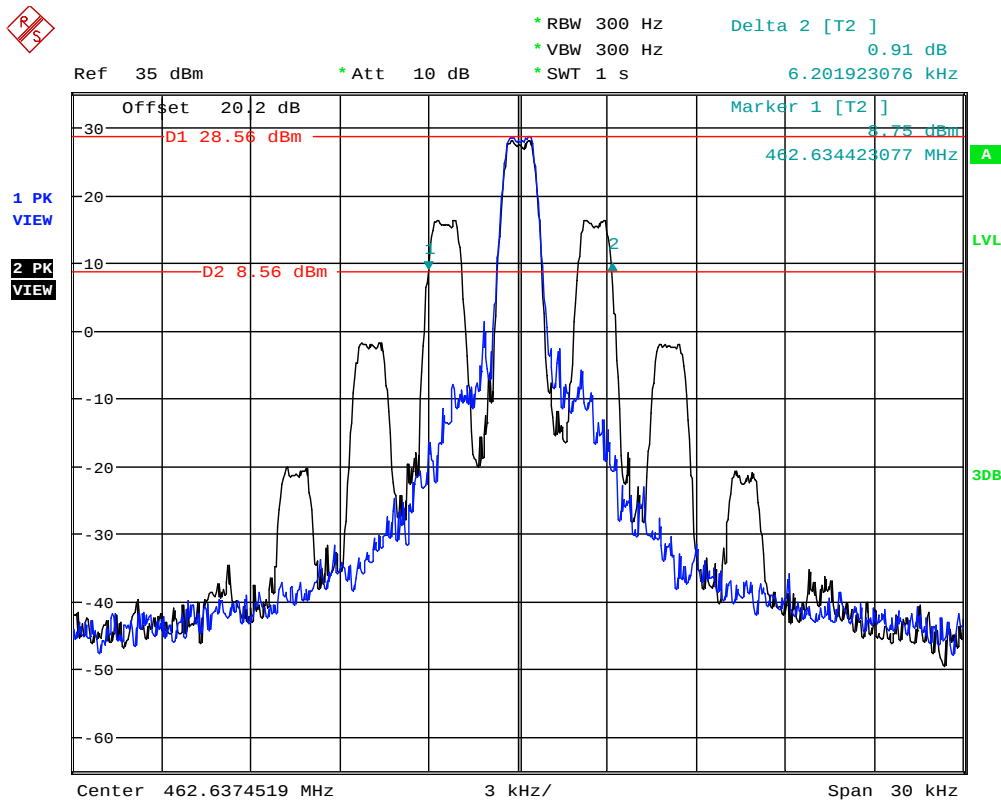


Occupied Bandwidth CH11:

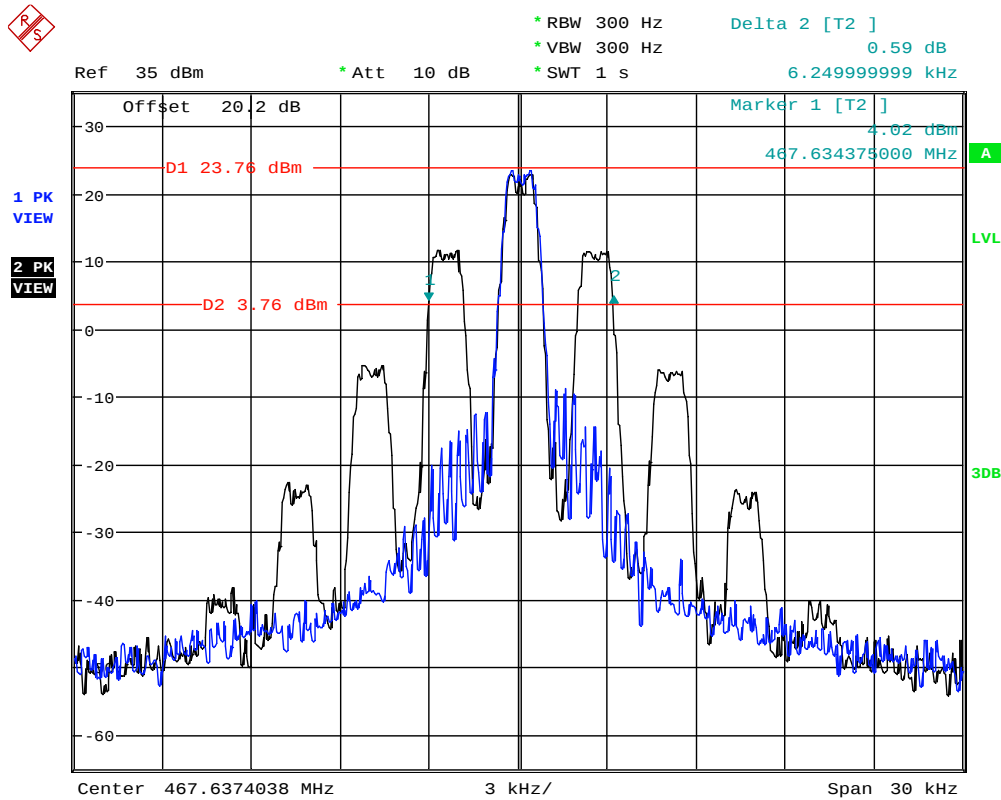


Occupied Bandwidth CH 17R:

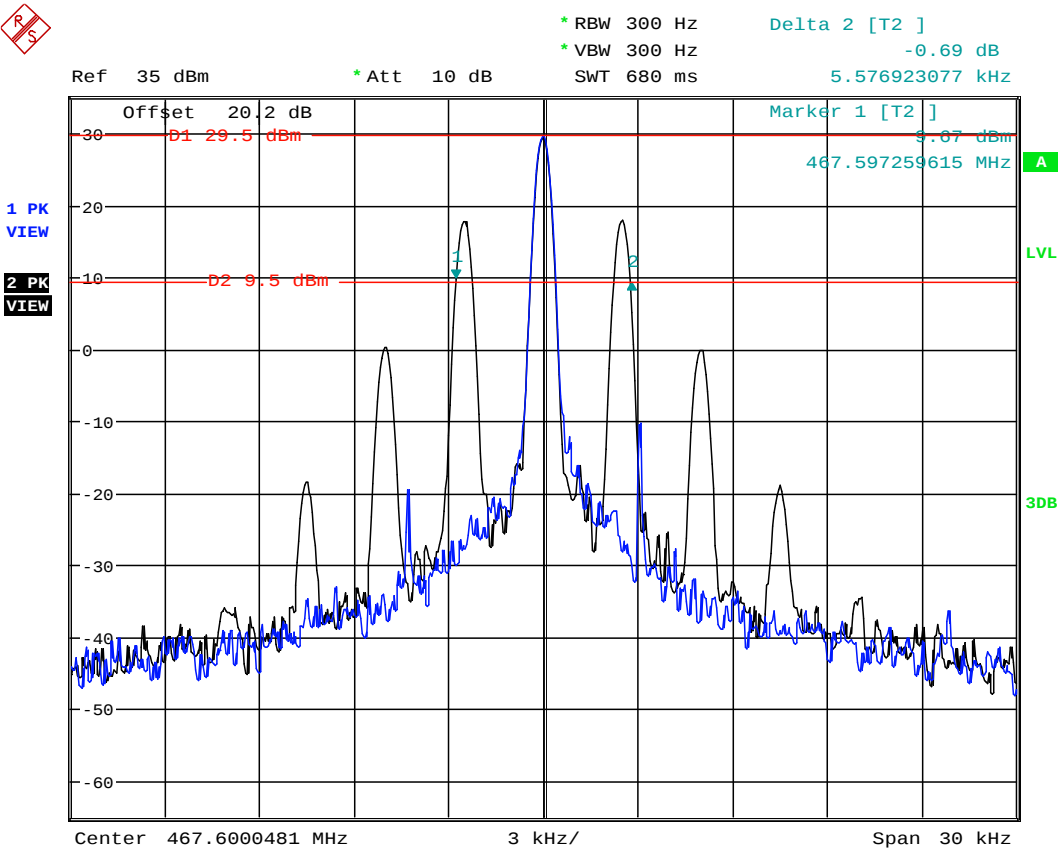


Emission mask CH 4

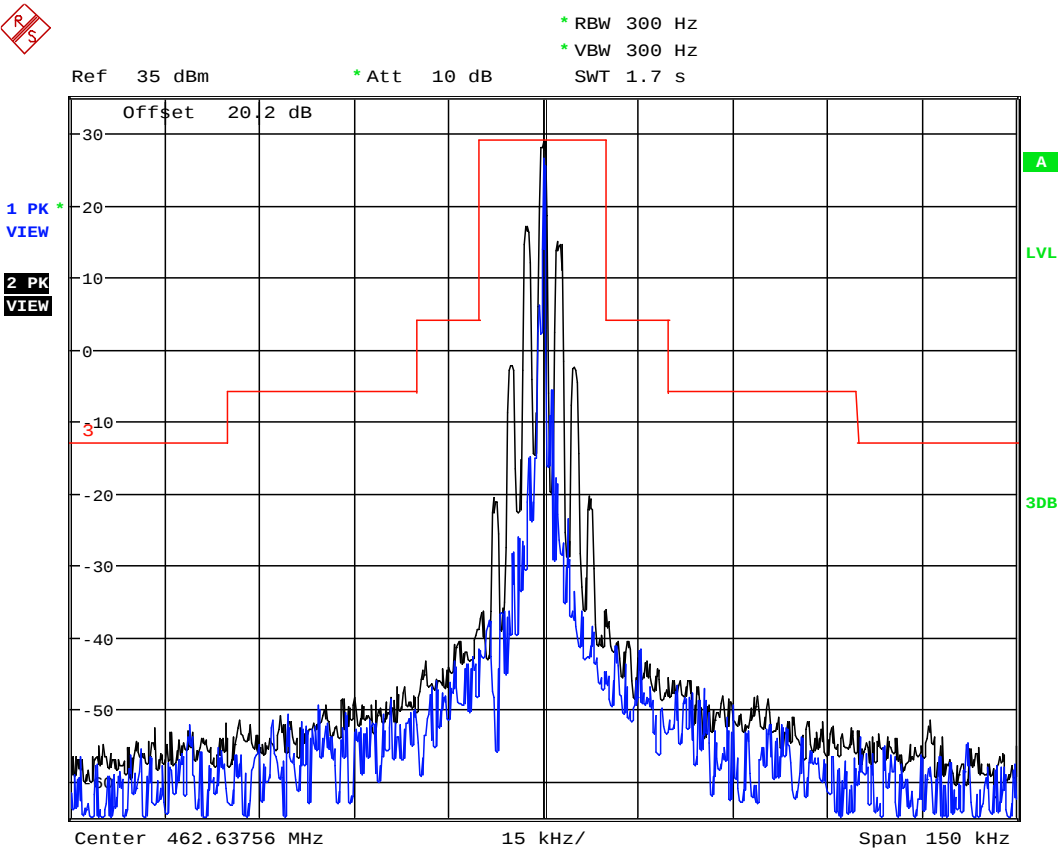

Emission mask CH11

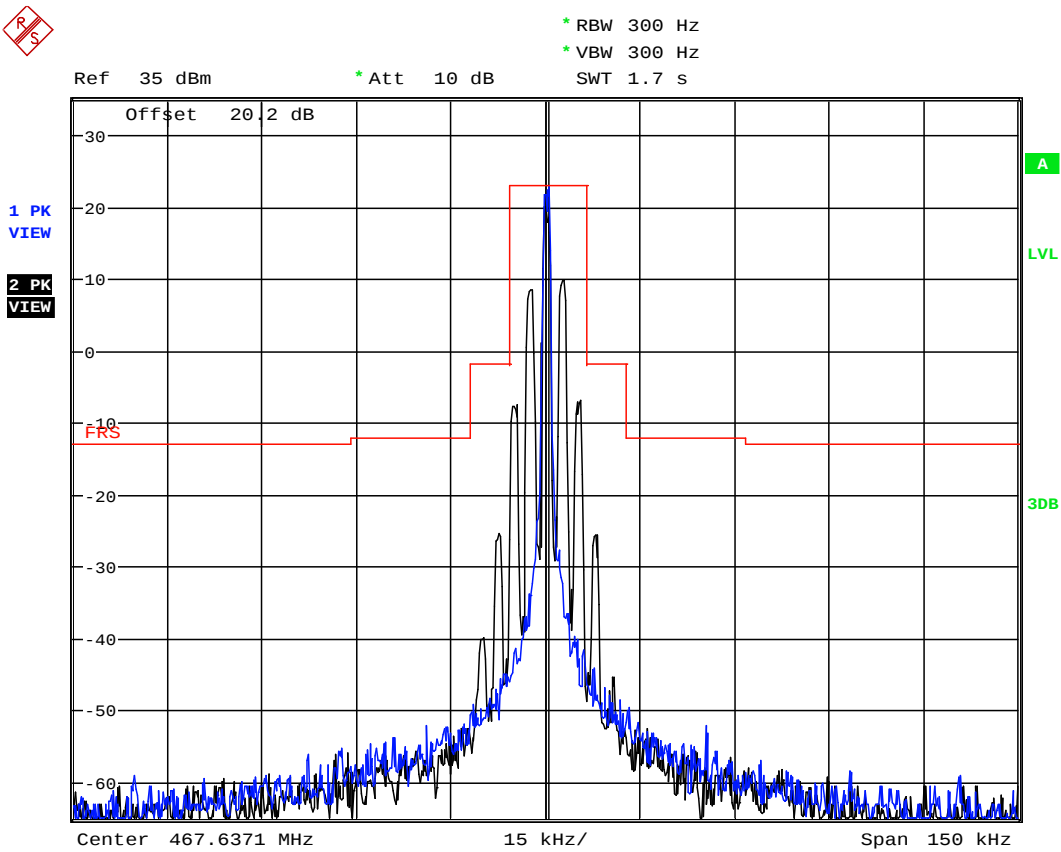

Emission mask CH 17R

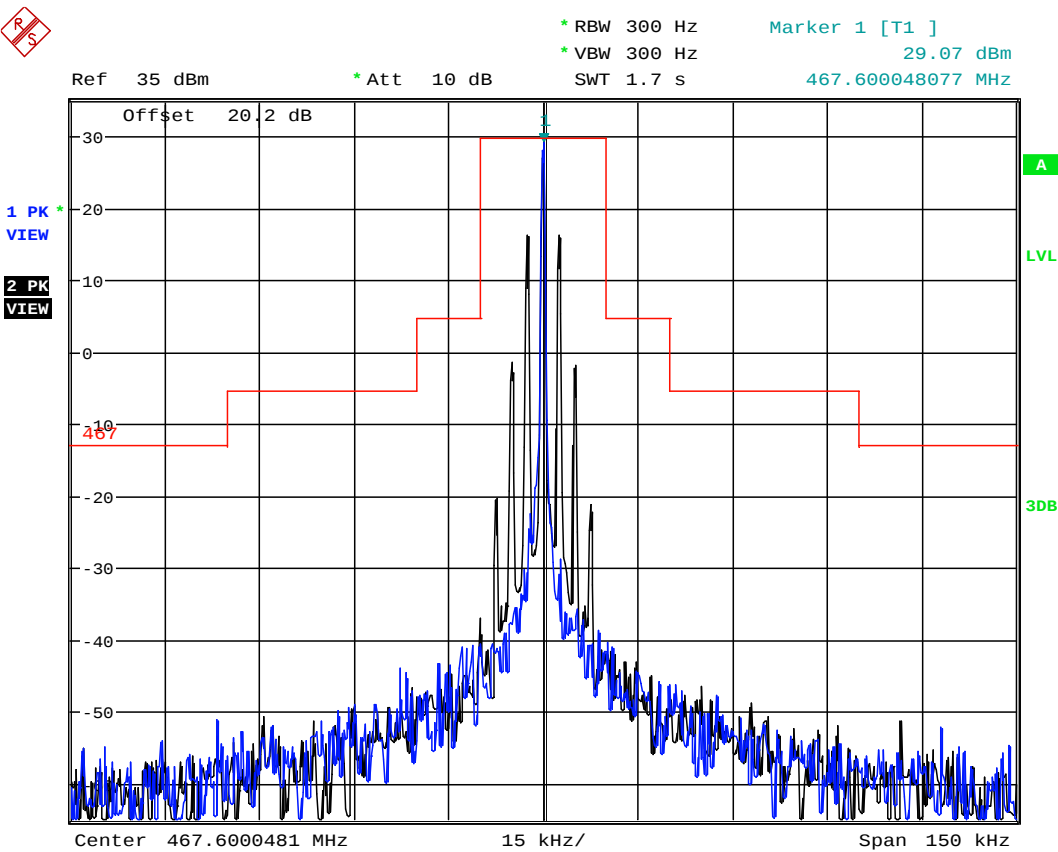

5. Modulation Characteristics

5.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	R&S	FSU	1166.1660.26	2013/11/13	1 Year
2	Attenuator	Mini-Circuits	BW-S20W2	101109	2013/11/13	1 Year
3	RF Cable	Micable	C10-01-01-1	100309	2013/11/13	1 Year
4	Audio Generator	Good Will Instrument	GAG-810	EM862120	2013/11/13	1 Year
5	Digit Multimeter	Agilent	34401A	MY47053313	2014/03/28	1 Year
6	RF COMMUNICATION TEST SET	HP	8920A	3813A1016	2014/03/28	1 Year

5.2. Block diagram of test setup

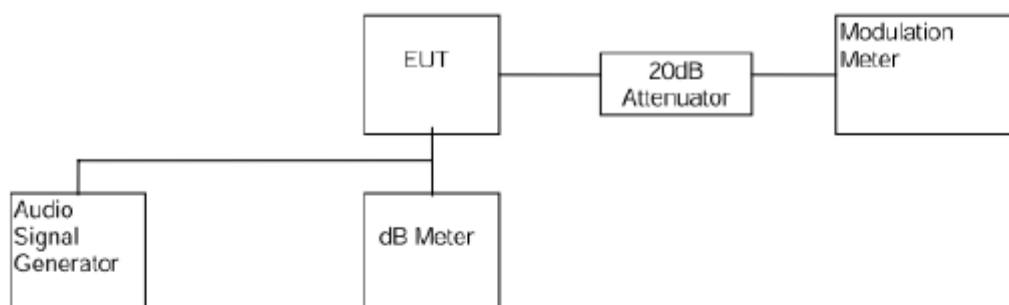


Figure 1

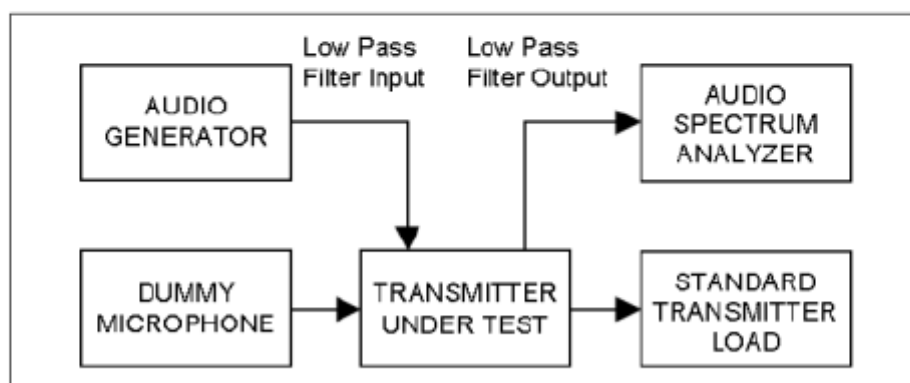


Figure 2

5.3. Limits

According to FCC 95.637:

(a) A GMRS transmitter that transmits emission types F1D, G1D, or G3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A GMRS transmitter that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A FRS unit that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 2.5 kHz, and the audio frequency response must not exceed 3.125 kHz .

(b) Each GMRS transmitter, except a mobile station transmitter with a power output of 2.5 W or less, must automatically prevent a greater than normal audio level from causing overmodulation. The transmitter also must include audio frequency low pass filtering, unless it complies with the applicable paragraphs of §95.631 (without filtering.) The filter must be between the modulation limiter and the modulated stage of the transmitter. At any frequency (f in kHz) between 3 and 20 kHz, the filter must have an attenuation of at least $60 \log_{10}(f/3)$ dB greater than the attenuation at 1 kHz. Above 20 kHz, it must have an attenuation of at least 50 dB greater than the attenuation at 1 kHz.

According to FCC 2.1047:

(a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.

For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

(b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

5.4. Test Procedure

Frequency deviation:

(1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1 KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB.

Record the frequency deviation obtained as a function of the input level.

(2). Repeat step (1) with input frequency changing to 300Hz, 500Hz, 1Kz, 1.5KHz, 2KHz and 3KHz in sequence.

Audio Frequency Response:

(1). Configure the EUT as shown in figure 1.

(2). Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.

(3). Vary the Audio frequency from 100 Hz to 5 KHz and record the frequency deviation.


(4). The peak frequency deviation must not exceed ± 2.5 KHz.

Audio Low Pass Filter Response:


- (1) Connect the equipment in figure 2.
- (2) Connect the audio frequency generator as close as possible the input of the post limiter low pass filter within the transmitter under test.
- (3) Connect the audio spectrum analyzer to the output of the post limiter low pass filter within the transmitter under test.
- (4) Apply a 1000 Hz tone from the audio frequency generator and adjust the level per manufacturer's specifications.
- (5) Record the dB level of the 1000 Hz spectral line on the audio spectrum analyzer as LEV1 .
- (6) Set the audio frequency generator to the desired test frequency between 3000 Hz and the upper low pass filter limit.
- (7) Record audio spectrum analyzer levels, at the test frequency in step (6).
- (8) Record the dB level on the audio spectrum analyzer as LEV2 . Method of Measurement for Transmitters .

5.5. Test Result**Frequency deviation:**


Channel 4: 462.6375MHz, GMRS								
Modulation Input(dB)	Peak Frequency Deviation (KHz)							Limit (KHz)
	300Hz	500Hz	1KHz	1.5KHz	2KHz	2.5KHz	3KHz	
-20.0	0.38	0.39	0.41	0.42	0.43	0.46	0.47	5
-15.0	0.40	0.41	0.48	0.51	0.47	0.50	0.57	5
-10.0	0.47	0.48	0.51	0.50	0.55	0.56	0.58	5
-5.0	0.67	0.76	0.74	0.75	0.78	0.76	0.80	5
0.0	1.10	1.32	1.50	1.71	1.76	1.80	1.91	5
5.0	1.21	1.90	1.96	2.12	2.21	2.20	1.92	5
10.0	1.59	1.91	2.12	2.14	2.16	2.16	2.20	5
15.0	1.86	2.12	2.11	2.15	2.15	2.19	2.25	5
20.0	2.13	2.25	2.26	2.32	2.23	2.30	2.45	5
Conclusion: PASS								
Test Date : 2014/05/20					Test Engineer : Leo Liu			

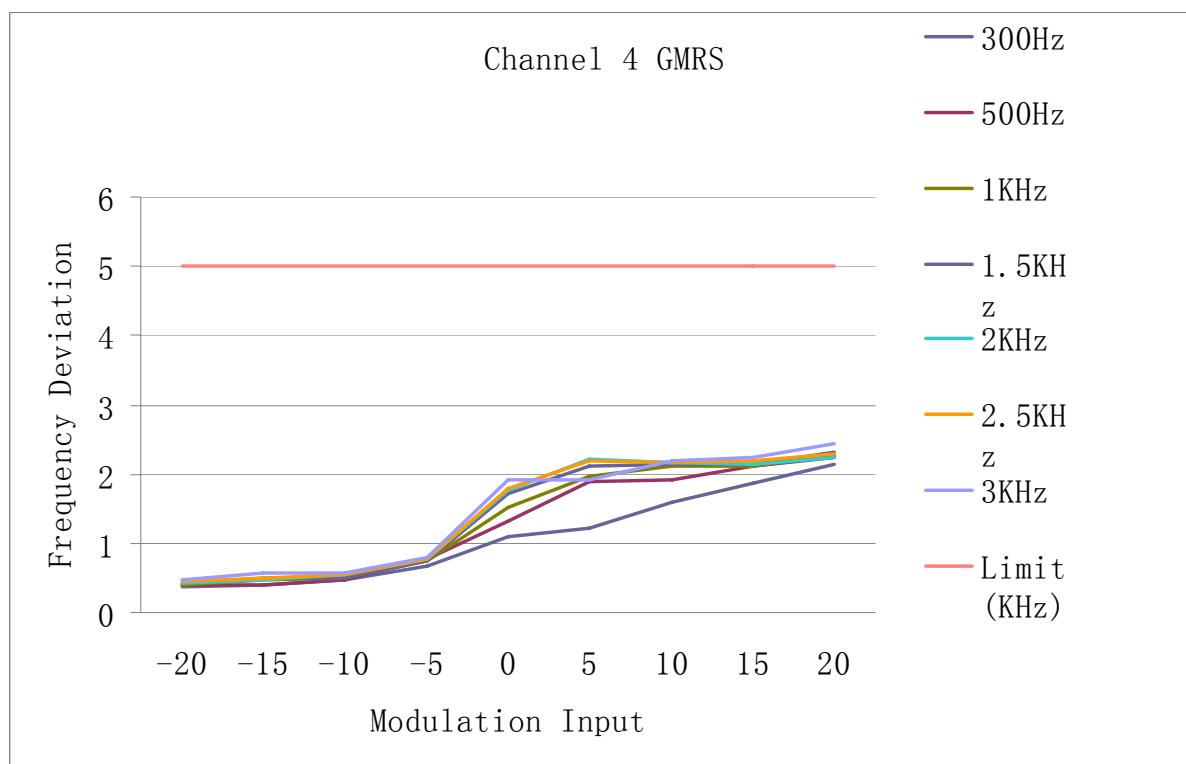

Channel 11: 467.6375MHz, FRS								
Modulation Input(dB)	Peak Frequency Deviation (KHz)							Limit (KHz)
	300Hz	500Hz	1KHz	1.5KHz	2KHz	2.5KHz	3KHz	
-20.0	0.36	0.37	0.41	0.42	0.47	0.48	0.49	2.5
-15.0	0.45	0.48	0.46	0.49	0.49	0.49	0.54	2.5
-10.0	0.47	0.50	0.50	0.51	0.54	0.51	0.51	2.5
-5.0	0.52	0.62	0.68	0.69	0.80	0.84	0.87	2.5
0.0	0.90	1.21	1.50	1.63	1.71	1.74	1.71	2.5
5.0	1.14	1.36	1.55	1.65	1.79	1.86	1.92	2.5
10.0	1.73	1.90	2.15	2.19	2.20	2.21	2.23	2.5
15.0	1.84	1.92	2.18	2.19	2.21	2.22	2.24	2.5
20.0	2.04	2.13	2.25	2.24	2.23	2.24	2.25	2.5
Conclusion: PASS								
Test Date : 2014/05/20				Test Engineer : Leo Liu				

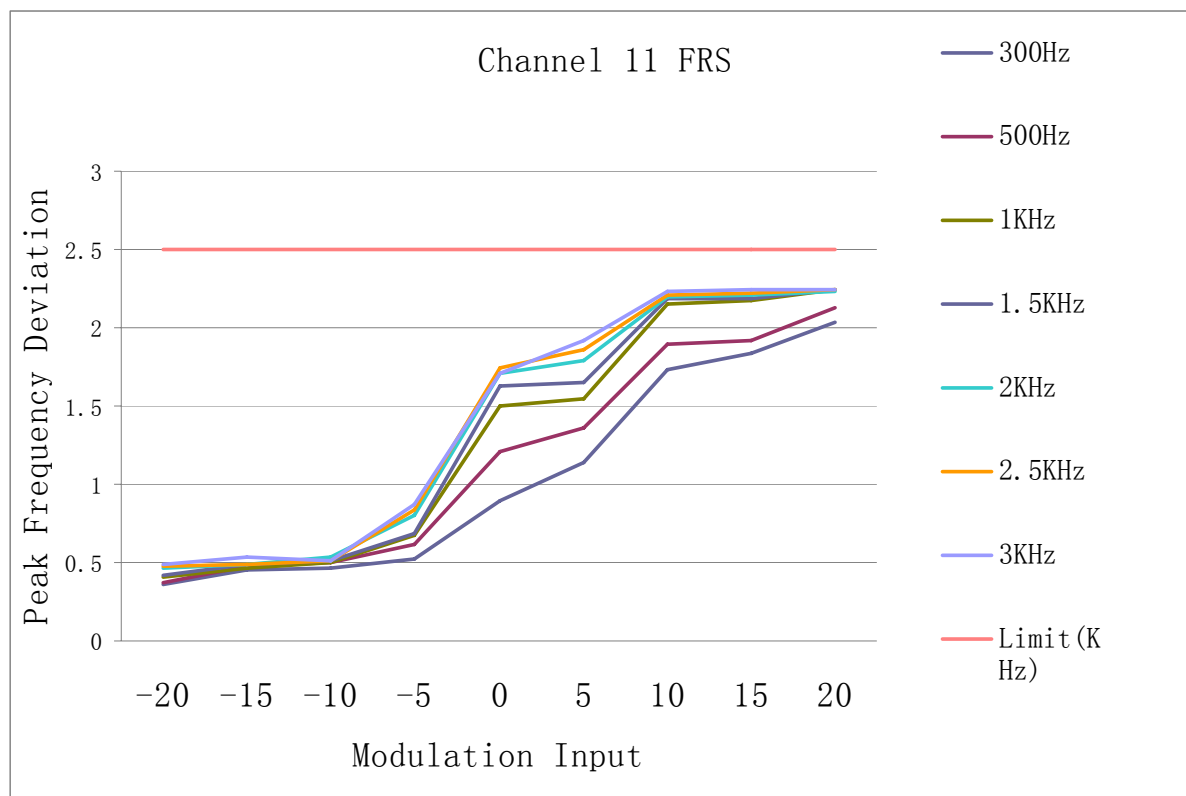


Channel 17R: 467.600MHz, GMRS								
Modulation Input(dB)	Peak Frequency Deviation (KHz)							Limit (KHz)
	300Hz	500Hz	1KHz	1.5KHz	2KHz	2.5KHz	3KHz	
-20.0	0.37	0.38	0.4	0.41	0.42	0.45	0.46	5
-15.0	0.39	0.41	0.46	0.48	0.4	0.5	0.53	5
-10.0	0.46	0.49	0.52	0.51	0.54	0.57	0.59	5
-5.0	0.66	0.75	0.75	0.77	0.78	0.78	0.79	5
0.0	1.13	1.35	1.5	1.72	1.75	1.79	1.9	5
5.0	1.2	1.4	1.67	1.93	2.2	2.21	2.13	5
10.0	1.73	1.92	2.02	2.15	2.16	2.17	2.2	5
15.0	1.91	2.1	2.12	2.13	2.14	2.2	2.21	5
20.0	2.14	2.23	2.22	2.31	2.3	2.31	2.35	5
Conclusion: PASS								
Test Date : 2014/05/20				Test Engineer : Leo Liu				

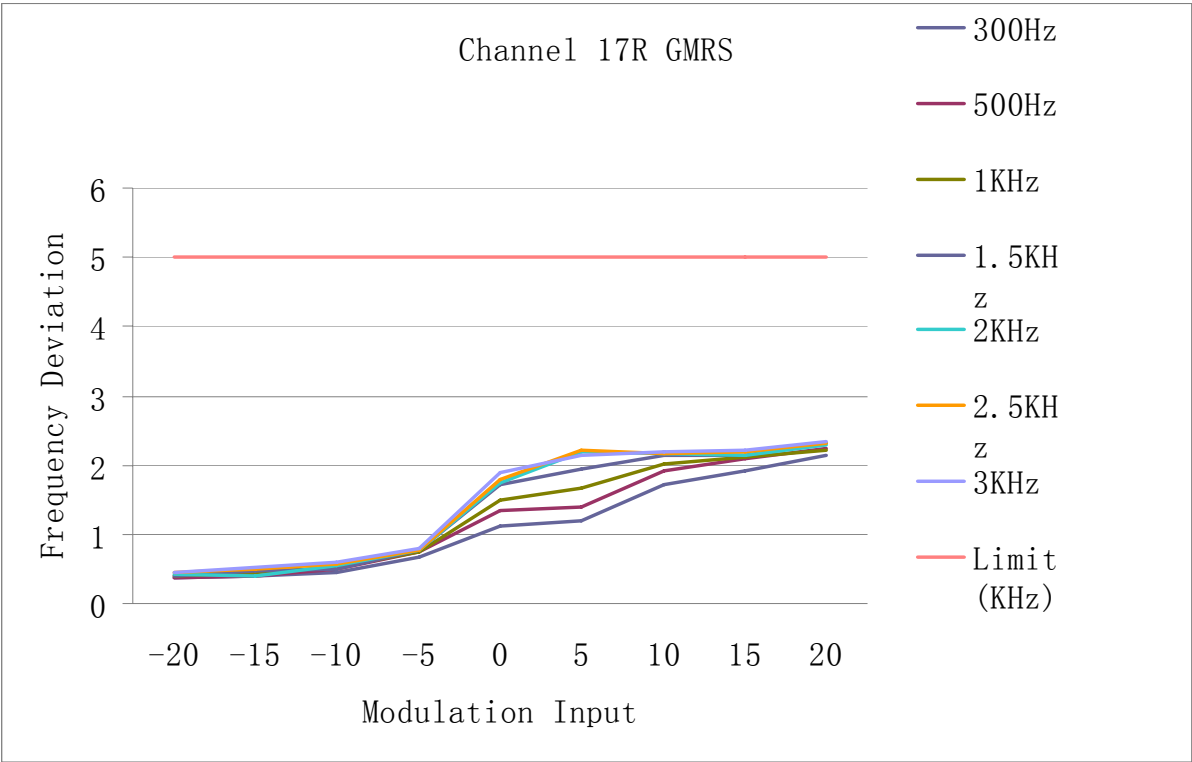

Audio Frequency Response


Channel 11: 467.6375MHz, FRS		
Modulation Frequency(Hz)	Deviation (KHz)	Limit (KHz)
100	0.41	3.125
200	0.42	3.125
300	0.42	3.125
400	0.43	3.125
500	0.44	3.125
600	0.46	3.125
700	0.47	3.125
800	0.49	3.125
900	0.49	3.125
1000	0.50	3.125
1500	1.28	3.125
2000	2.10	3.125
2500	2.18	3.125
3000	2.19	3.125
3500	1.57	3.125
4000	1.34	3.125
4500	0.80	3.125

5000	0.71	3.125
Conclusion:PASS		
Test Date : 2014/05/20		Test Engineer : Leo Liu

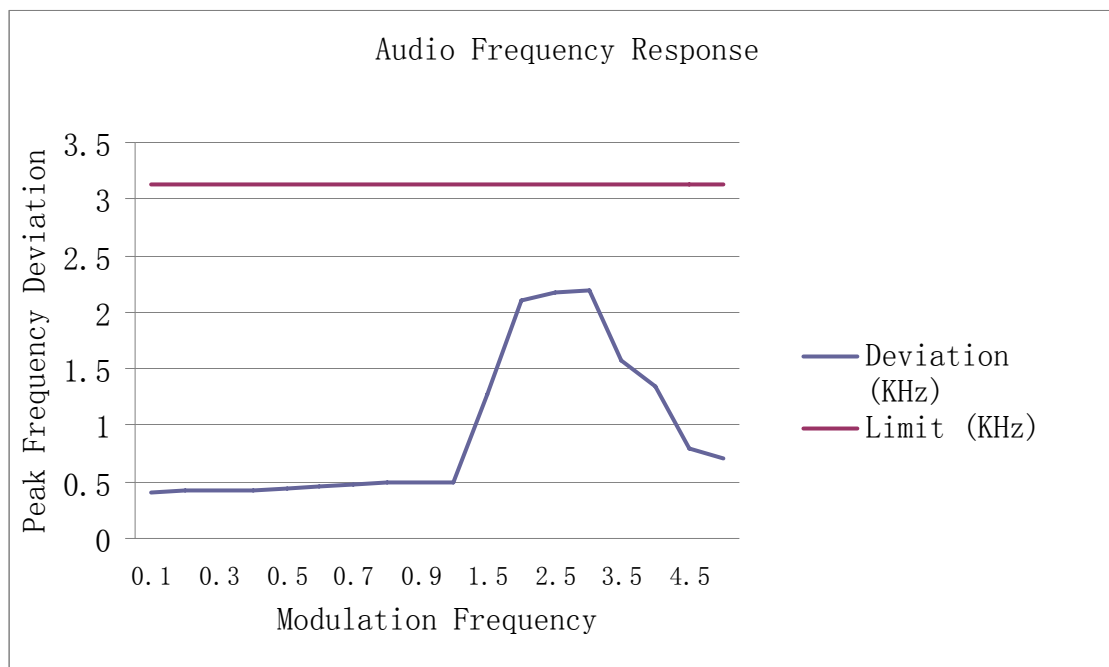


Audio Low Pass Filter Response

Channel 4: 462.6375MHz, GMRS		
Frequency(KHz)	Response	Limit
1	0	0.00
2	-2.89	0.00
3	-5.10	0.00
4	-25.23	-8.62
5	-35.15	-13.64
6	-41.78	-18.75
7	-45.31	-22.16
8	-48.90	-25.57
9	-51.89	-28.98
10	-53.91	-32.39
20	-53.23	-49.43
30	-56.32	-50.00
40	-56.65	-50.00
50	-55.89	-50.00
Conclusion: PASS		
Test Date : 2014/05/20		Test Engineer : Leo Liu

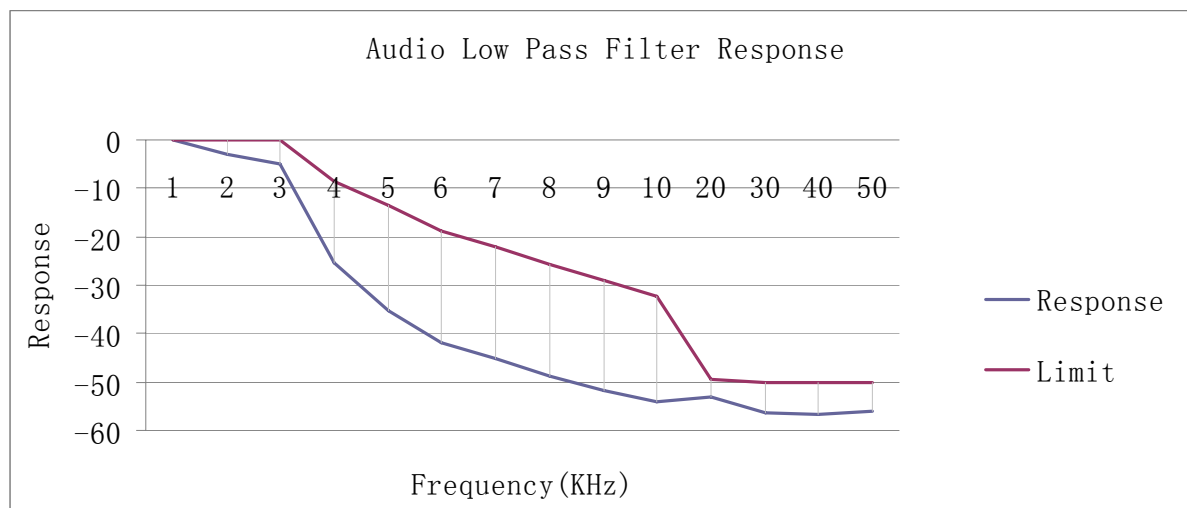**Audio Low Pass Filter Response**

Channel 17R: 467.600MHz, GMRS		
Frequency(KHz)	Response	Limit
1	0	0.00
2	-1.21	0.00
3	-3.5	0.00
4	-26.24	-8.62
5	-37.32	-13.64
6	-40.12	-18.75
7	-43.23	-22.16
8	-45.12	-25.57
9	-53.12	-28.98
10	-54.56	-32.39
20	-55.12	-49.43
30	-56.89	-50.00
40	-56.12	-50.00
50	-57.1	-50.00
Conclusion: PASS		
Test Date : 2014/05/20		Test Engineer : Leo Liu

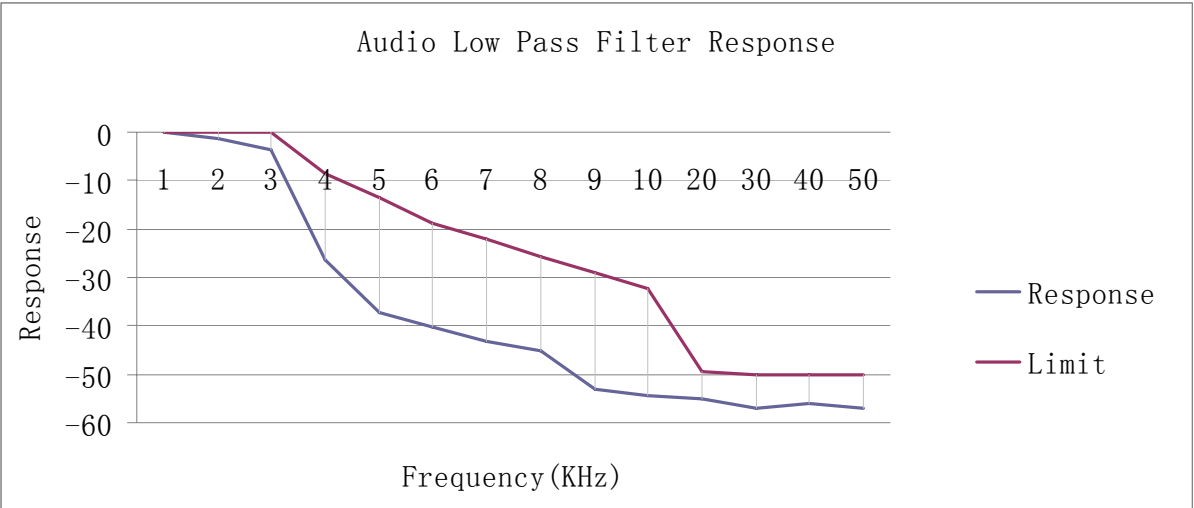


6. Radiated Spurious Emission

6.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	R&S	FSU26	1166.1660.26	2013/11/26	1Y
2	EMI Test Receiver	R&S	ESU8	100316	2013/11/13	1 Y
3	Loop antenna	TESEQ	HLA6120	20129	2013/11/16	1 Y
4	Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	2013/11/26	1Y
5	Double Ridged Horn Antenna	R&S	HF907	100276	2013/11/16	1Y
6	Double Ridged Horn Antenna	R&S	HF907	100265	2013/11/16	1Y
7	Dipole antenna	Schwarzbeck	UHAP	1101	2013/11/26	1Y
8	Dipole antenna	Schwarzbeck	VHAP	1118	2013/11/26	1Y
9	RF Cable	R&S	R01	10403	2013/11/26	1Y
10	RF Cable	R&S	R02	10512	2013/11/26	1Y
11	RF Cable	R&S	R01	10454	2013/11/26	1Y
12	RF Cable	R&S	R02	10343	2013/11/26	1Y
13	Signal Generator	R&S	SMBV100A	1407.6004K02	2013/11/26	1Y

6.2. Block diagram of test setup

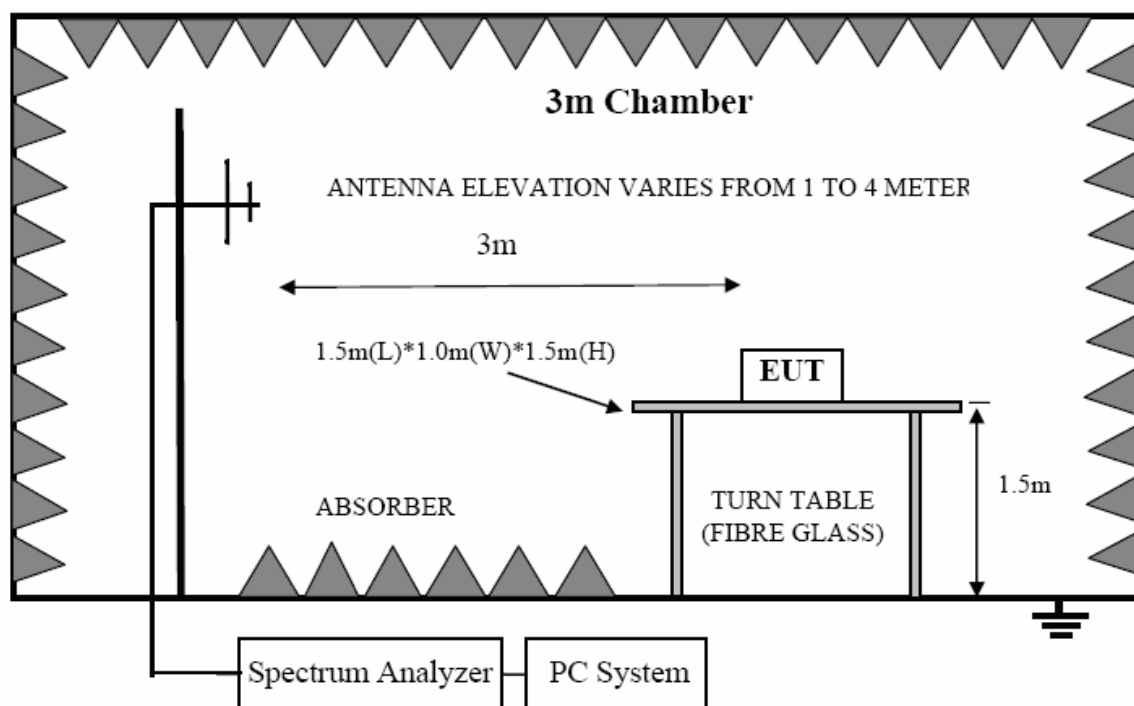

6.3. Limit

The unwanted emission should be attenuated below TP by at least $43+10\log(\text{Transmit Power})$ dB

6.4. Test Procedure

- (1) On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

6.5. Test result

Test Mode: GMRS mode continue transmitting Channel 4, Frequency= 462.6375MHz, with earphone and power adapter 2.(Note 1)					
Channle Maximum Power: 29.88dBm(0.973W)					
Frequency (MHz)	Antenna polarization	Result (dBm)	Limit(Note 2) (dBm)	Margin (dB)	Conclusion
321	H	-50.23	-13	37.23	PASS
925.27	H	-30.89	-13	17.89	PASS
1387.9	H	-29.81	-13	16.81	PASS
234	V	-49.50	-13	36.50	PASS
925.27	V	-24.12	-13	11.12	PASS
1387.9	V	-26.90	-13	13.90	PASS
Note 1: According explorer test, this configuration have worst emission.					
Note 2:Limit= 29.88 dBm- (43+10log(Transmit Power)) = -13dBm					
Test Date : 2014/05/20			Test Engineer : Leo Liu		

Test Mode: FRS mode continue transmitting Channel 11, Frequency= 467.6375MHz, with earphone and power adapter 2.(Note 1)					
Channle Maximum Power: 23.66dBm (0.232W)					
Frequency (MHz)	Antenna polarization	Result (dBm)	Limit(Note 2) (dBm)	Margin (dB)	Conclusion
321	H	-49.78	-13	36.78	PASS
935.27	H	-36.12	-13	23.12	PASS
1402.9	H	-34.45	-13	21.45	PASS
254	V	-50.32	-13	37.32	PASS
935.27	V	-33.45	-13	20.45	PASS
1402.9	V	-32.98	-13	19.98	PASS
Note 1: According explorer test, this configuration have worst emission.					
Note 2:Limit= 23.66 dBm- (43+10log(Transmit Power)) = -13dBm					
Test Date : 2014/05/20			Test Engineer : Leo Liu		


Test Mode: GMRS mode continue transmitting Channel 17R, Frequency= 467.600MHz, with earphone and power adapter 2.(Note 1)					
Channle Maximum Power: 29.68dBm(0.929W)					
Frequency (MHz)	Antenna polarization	Result (dBm)	Limit(Note 2) (dBm)	Margin (dB)	Conclusion
320	H	-51.45	-13	38.45	PASS
935.2	H	-32.13	-13	19.13	PASS
1402.8	H	-30.23	-13	17.23	PASS
241	V	-51.21	-13	38.21	PASS
935.2	V	-26.31	-13	13.31	PASS
1402.8	V	-28.12	-13	15.12	PASS
Note 1: According explorer test, this configuration have worst emission.					
Note 2:Limit= 29.68 dBm- (43+10log(Transmit Power)) = -13dBm					
Test Date : 2014/05/20			Test Engineer : Leo Liu		

7. Frequency Stability

7.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	R&S	FSU	1166.1660.26	2013/11/26	1 Y
2	Attenuator	Mini-Circuits	BW-S10W2	101109	2013/11/13	1 Y
3	RF Cable	Micable	C10-01-01-1	100309	2013/11/26	1 Y
4	Temperature controller	Dongguan Bell	BE-TH-150M3	201208153364	2013/11/13	1 Y
5	DC Power Source	ALLPower	ADC50-20	990406	2013/11/26	1 Y

7.2. Block diagram of test setup

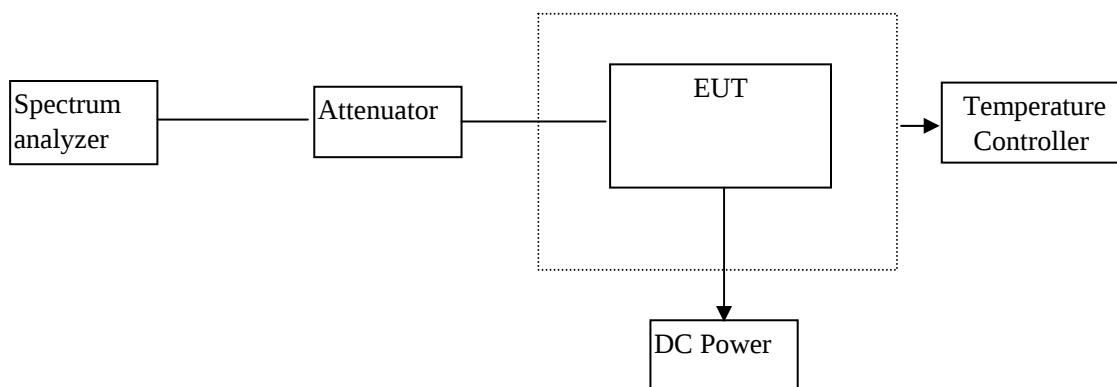

7.3. Limits

According to FCC 95.621

- (b) Each GMRS transmitter for mobile station, small base station and control station operation must be maintained within a frequency tolerance of 0.0005%. Each GMRS transmitter for base station (except small base), mobile relay station or fixed station operation must be maintained within a frequency tolerance of 0.00025%.

According to FCC 95.627

- (b) Each FRS unit must be maintained within a frequency tolerance of 0.000 25%.

7.4. Test Procedure

Frequency stability versus environmental temperature:

- Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.

- (3). Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- (4). Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

Frequency stability versus input voltage:

- (1). Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C. Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 4.5 V
- (2). Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
- (3). Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

7.5. Test result

Frequency Tolerance							
CH #	Frequency (MHz)	TYPE	Result			FCC limit	
			Measured (MHz)	Tolerance (%)	Tolerance (ppm)	%	ppm
1	462.5625	GMRS	462.5624	-0.000022	-0.22	0.0005%	±5
2	462.5875	GMRS	462.5874	-0.000022	-0.22	0.0005%	±5
3	462.6125	GMRS	462.6125	0	0	0.0005%	±5
4	462.6375	GMRS	462.6375	0	0	0.0005%	±5
5	462.6625	GMRS	462.6624	-0.000022	-0.22	0.0005%	±5
6	462.6875	GMRS	462.6875	0	0	0.0005%	±5
7	462.7125	GMRS	462.7125	0	0	0.0005%	±5
8	467.5625	FRS	467.5625	0	0	0.00025%	±5
9	467.5875	FRS	467.5876	0.000021	0.21	0.00025%	±5
10	467.6125	FRS	467.6126	0.000021	0.21	0.00025%	±5
11	467.6375	FRS	467.6374	-0.000021	0.21	0.00025%	±5
12	467.6625	FRS	467.6625	0	0	0.00025%	±5
13	467.6875	FRS	467.6875	0	0	0.00025%	±5
14	467.7125	FRS	467.7125	0	0	0.00025%	±5
15	462.55	GMRS	462.550	0	0	0.0005%	±5
16	462.575	GMRS	462.575	0	0	0.0005%	±5
17	462.6	GMRS	462.60	0	0	0.0005%	±5
18	462.625	GMRS	462.625	0	0	0.0005%	±5
19	462.65	GMRS	462.650	0	0	0.0005%	±5
20	462.675	GMRS	462.675	0	0	0.0005%	±5
21	462.7	GMRS	462.70	0	0	0.0005%	±5
22	462.725	GMRS	462.725	0	0	0.0005%	±5

Frequency Tolerance							
CH #	Frequency (MHz)	TYPE	Result			FCC limit	
			Measured (MHz)	Tolerance (%)	Tolerance (ppm)	%	ppm
15R	467.5500	GMRS	467.5501	0.000021	0.21	0.0005%	±5
16R	467.5750	GMRS	467.5750	0	0	0.0005%	±5
17R	467.6000	GMRS	467.6000	0	0	0.0005%	±5
18R	467.6250	GMRS	467.6251	0.000021	0.21	0.0005%	±5
19R	467.6500	GMRS	467.6500	0	0	0.0005%	±5
21R	467.7000	GMRS	467.7000	0	0	0.0005%	±5
22R	467.7250	GMRS	467.7249	-0.000021	0.21	0.0005%	±5
15R	467.5500	GMRS	467.5500	0	0	0.0005%	±5
Conclusion:PASS							
Test Date : 2014/05/20				Test Engineer : Leo Liu			

Frequency Deviation With Temperature Variation						
GMRS Channel 4						
Temperature (°C)	Frequency (MHz)	Result			FCC limit	
		Measured (MHz)	Tolerance (%)	Tolerance (ppm)	%	ppm
-30	462.6375	462.6375	0	0	0.0005%	±5
-20	462.6375	462.6374	-0.000022	-0.22	0.0005%	±5
-10	462.6375	462.6374	-0.000022	-0.22	0.0005%	±5
0	462.6375	462.6376	0.000022	0.22	0.0005%	±5
10	462.6375	462.6375	0	0	0.0005%	±5
20	462.6375	462.6375	0	0	0.0005%	±5
30	462.6375	462.6374	-0.000022	-0.22	0.0005%	±5
40	462.6375	462.6376	0.000022	0.22	0.0005%	±5
50	462.6375	462.6375	0	0	0.0005%	±5
FRS Channel 11						
-30	467.6375	467.6375	0	0	0.00025%	±5
-20	467.6375	467.6374	-0.000021	-0.21	0.00025%	±5
-10	467.6375	467.6375	0	0	0.00025%	±5
0	467.6375	467.6374	-0.000021	-0.21	0.00025%	±5
10	467.6375	467.6376	0.000021	0.21	0.00025%	±5
20	467.6375	467.6375	0	0	0.00025%	±5
30	467.6375	467.6375	0	0	0.00025%	±5
40	467.6375	467.6374	-0.000021	-0.21	0.00025%	±5
50	467.6375	467.6375	0	0	0.00025%	±5
GMRS Channel 17R						
-30	467.6000	467.6001	0.000021	0.21	0.0005%	±5
-20	467.6000	467.6001	0.000021	0.21	0.0005%	±5
-10	467.6000	467.5999	0	0	0.0005%	±5
0	467.6000	467.6001	0.000021	0.21	0.0005%	±5
10	467.6000	467.6000	0	0	0.0005%	±5

Frequency Deviation With Temperature Variation						
GMRS Channel 4						
Temperature (°C)	Frequency (MHz)	Result			FCC limit	
		Measured (MHz)	Tolerance (%)	Tolerance (ppm)	%	ppm
20	467.6000	467.6000	0	0	0.0005%	±5
30	467.6000	467.5999	-0.000021	-0.21	0.0005%	±5
40	467.6000	467.5999	-0.000021	-0.21	0.0005%	±5
50	467.6000	467.6000	0	0	0.0005%	±5
Conclusion:PASS						
Test Date : 2014/05/19				Test Engineer : Leo Liu		


Frequency Deviation With Voltage Variation						
GMRS Channel 4						
Voltage(V)	Frequency (MHz)	Result			FCC limit	
		Measured (MHz)	Tolerance (%)	Tolerance (ppm)	%	ppm
4.5	462.6375	462.6375	0	0	0.0005%	±5
4.2	462.6375	462.6374	-0.000022	-0.22	0.0005%	±5
4.0	462.6375	462.6376	0.000022	0.22	0.0005%	±5
3.8	462.6375	462.6375	0	0	0.0005%	±5
3.6	462.6375	462.6374	-0.000022	-0.22	0.0005%	±5
3.4	462.6375	462.6375	0	0	0.0005%	±5
3.3	462.6375	462.6376	0.000022	0.22	0.0005%	±5
FRS Channel 11						
4.5	467.6375	467.6375	0	0	0.00025%	±5
4.2	467.6375	467.6375	0	0	0.00025%	±5
4.0	467.6375	467.6374	-0.000021	-0.21	0.00025%	±5
3.8	467.6375	467.6375	0	0	0.00025%	±5
3.6	467.6375	467.6376	0.000021	0.21	0.00025%	±5
3.4	467.6375	467.6374	-0.000021	-0.21	0.00025%	±5
3.3	467.6375	467.6374	-0.000021	-0.21	0.00025%	±5
GMRS Channel 17R						
4.5	467.6000	467.6000	0	0	0.00025%	±5
4.2	467.6000	467.5999	-0.000021	-0.21	0.0005%	±5
4.0	467.6000	467.6000	0	0	0.00025%	±5
3.8	467.6000	467.6001	0.000021	0.21	0.0005%	±5
3.6	467.6000	467.5999	-0.000021	-0.21	0.0005%	±5
3.4	467.6000	467.6000	0	0	0.00025%	±5
3.3	467.6000	467.6001	0.000021	0.21	0.0005%	±5
Conclusion:PASS						
Test Date : 2014/05/19				Test Engineer : Leo Liu		

8. Power Line Conducted Emission

8.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	R&S	ESU8	100316	2013/11/13	1 Year
2	LISN 1	R&S	ENV216	101109	2013/11/13	1 Year
3	LISN 2	R&S	ESH2-Z5	100309	2013/11/13	1 Year
4	Pulse Limiter	R&S	ESH3-Z2	101242	2013/11/13	1 Year

8.2. Block diagram of test setup

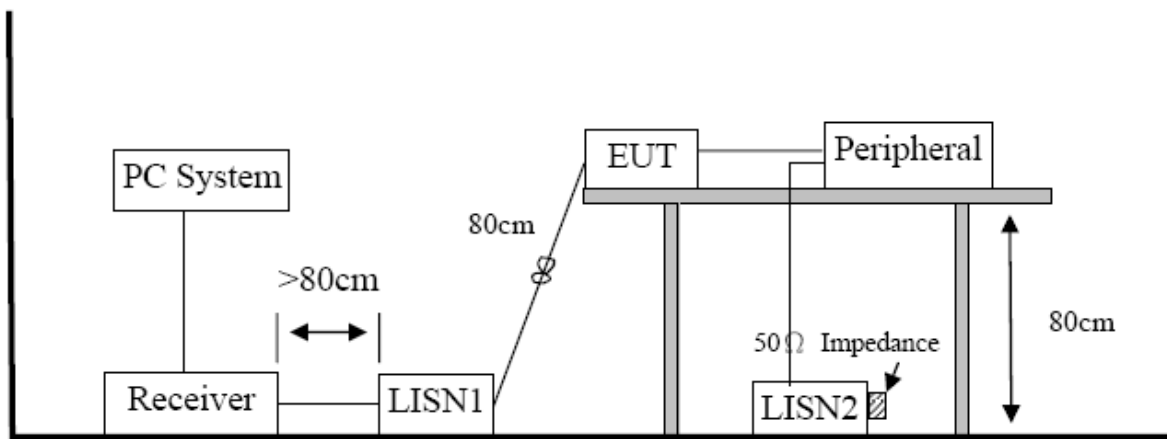

8.3. Power Line Conducted Emission Limits(Class B)

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

8.4. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

8.5. Test Result

PASS. (See below detailed test result)


Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “-----” means average detection; “-----” mans peak detection

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **E:\2014 test data\ R500.EM6**
Test Date : 2014-05-22 **Tested By** : Jerry
EUT : Two-way radio **Model Number** : R500
Power Supply : AC 120V/60Hz **Test Mode** : Charging mode
Condition : Temp:24.5'C,Humi:55%,
 : Press:100.1kPa **LISN** : 2013 ENV216/LINE
Memo :

Data : 14

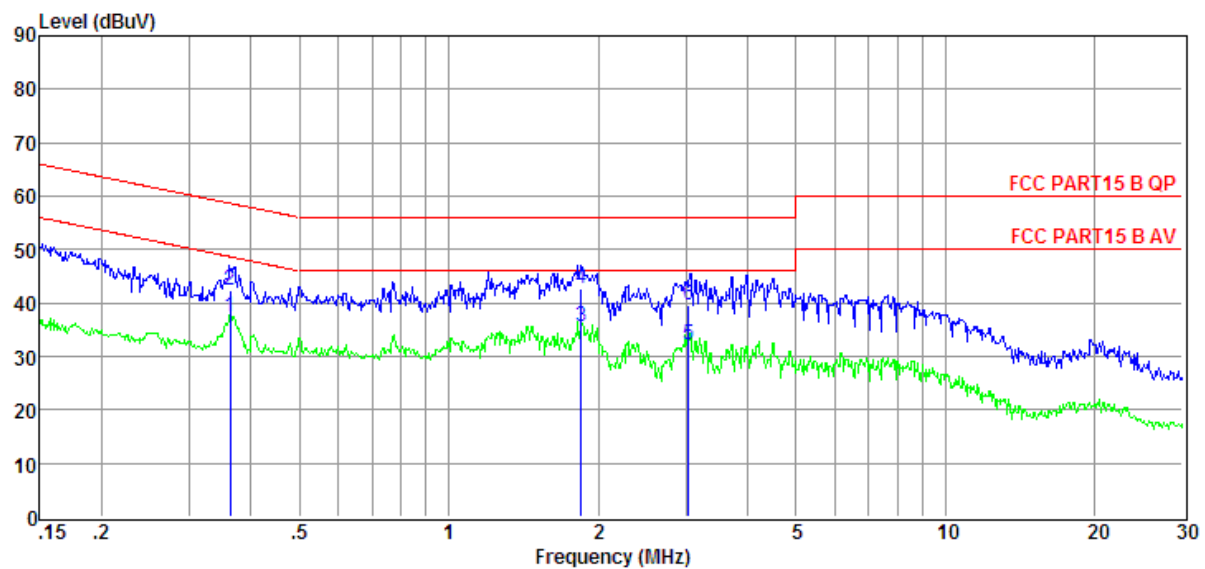

Item	Freq	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.36	17.94	9.63	0.02	9.86	37.45	48.65	-11.20	Average	LINE
2	0.36	22.82	9.63	0.02	9.86	42.33	58.65	-16.32	QP	LINE
3	1.85	16.12	9.63	0.07	9.86	35.68	46.00	-10.32	Average	LINE
4	1.85	23.05	9.63	0.07	9.86	42.61	56.00	-13.39	QP	LINE
5	3.04	12.42	9.65	0.09	9.86	32.02	46.00	-13.98	Average	LINE
6	3.04	20.13	9.65	0.09	9.86	39.73	56.00	-16.27	QP	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss


2. If QP Result comply with AV limit, AV Result is deemed to comply with AV limit

3. Test setup: RBW: 200Hz(9kHz—150kHz) , 9kHz(150kHz—30MHz), Step size:4kHz, Scan time: auto

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **E:\2014 test data\ 5300.EM6**
Test Date : 2014-05-22 **Tested By** : Jerry
EUT : Two-way radio **Model Number** : R500
Power Supply : AC 120V/60Hz **Test Mode** : Charging mode
Condition : Temp:24.5'C,Humi:55%,
 : Press:100.1kPa **LISN** : 2013 ENV216/NEUTRAL
Memo :

Data : 16

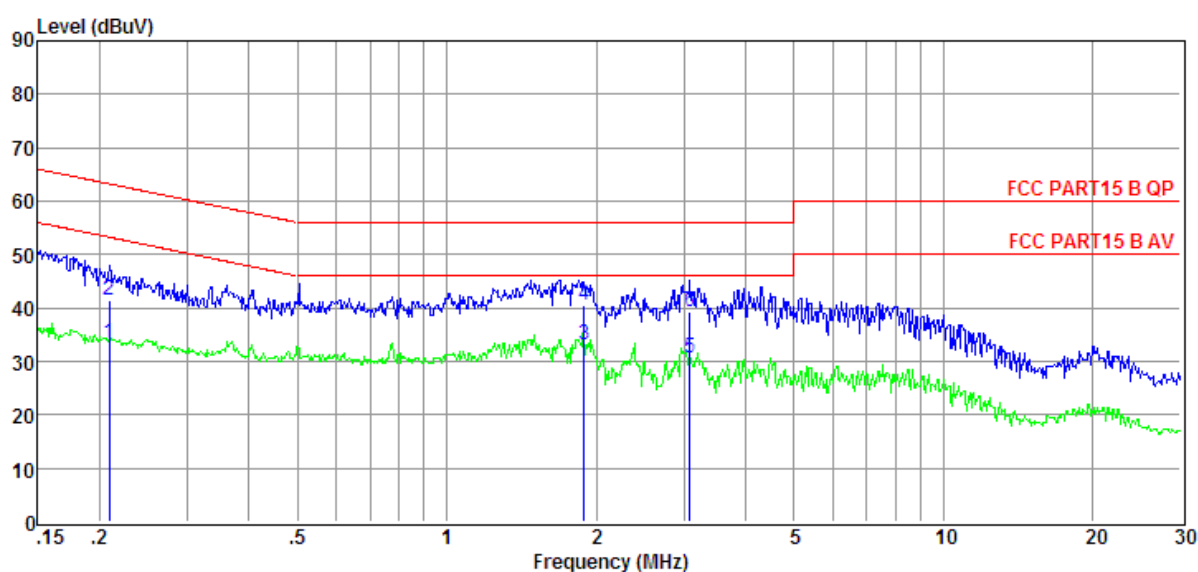

Item	Freq	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.21	13.99	9.59	0.02	9.85	33.45	53.23	-19.78	Average	NEUTRAL
2	0.21	21.89	9.59	0.02	9.85	41.35	63.23	-21.88	QP	NEUTRAL
3	1.89	13.59	9.61	0.07	9.86	33.13	46.00	-12.87	Average	NEUTRAL
4	1.89	20.85	9.61	0.07	9.86	40.39	56.00	-15.61	QP	NEUTRAL
5	3.09	10.92	9.61	0.09	9.86	30.48	46.00	-15.52	Average	NEUTRAL
6	3.09	19.68	9.61	0.09	9.86	39.24	56.00	-16.76	QP	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss

2. If QP Result comply with AV limit, AV Result is deemed to comply with AV limit

3. Test setup: RBW: 200Hz(9kHz—150kHz) , 9kHz(150kHz—30MHz), Step size:4kHz, Scan time: auto