



FCC Part 95 RF TEST REPORT

Issued to

Giant Telecom Ltd.

For

Walkie-Talkie

Model Name	:	MU350R /MU560CR /MU351R
Trade Name	:	Motorola
Brand Name	:	N.A
FCC ID	:	RAQMUEFJ
Standard	:	47 CFR Part 95
Test date	:	May 1,2013 –May 8, 2013
Issue date	:	May 9, 2013

by

Shenzhen MORLAB Communication Technology Co., Ltd

Tested by Houyiyang
 Hou Yiyang
 (Test Engineer)
 Date 2013.5.9



CTIA Authorized Test Lab
 LAB CODE 20081222-00
 IEEE 1725 OTA
 MORLAB
 電訊管理局



GCF
 Official Observer of
 Global Certification Forum

Bluetooth
 BQTF

FCC
 Reg. No.
 695796

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced either in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof, prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

1. GENERAL INFORMATION	3
1.1. EUT Description	3
1.2. Test Standards and Results.....	4
1.3. Facilities and Accreditations	5
2. 47 CFR PART 95 REQUIREMENTS.....	6
2.1. RF Output Power	6
3.1 Modulation Characteristics	9
4.1 Occupied Bandwidth And Emission Mask	15
5.1 Spurious Emission.....	18
6.1 Frequency Stability	22
7.1 RF exposure evaluation.....	26
7.2 Declaration Of Identity	27

Change History		
Issue	Date	Reason for change
1.0	May 20, 2013	First edition

1. General Information

1.1. EUT Description

EUT Type: Walkie-Talkie
Applicant: Giant Telecom Ltd.
33/F, AIA Kowloon Tower, Landmark East, 100 How Ming Street,
Kwun Tong , Kowloon
Manufacturer: DONGGUAN WISETRONICS TELECOM EQUIPMENT CO.
LTD
Elite Industrial City, Melin District, Dailing Mount Town,
Dongguan Guangdong, China
Operating Frequency Range.: 462.5625MHz ~ 462.7125 MHz (GMRS 1~7 channel)
467.5625 MHz ~ 467.7125 MHz (FRS 8~14 channel)
462.5500 MHz ~ 462.7250 MHz (GMRS 15~22 channel)
Modulation Type: FM Modulation
RF Output Power.....: GMRS: 2.0 W FRS: 0.5W
Channel Separation.....: 25KHz
Emission Type.....: F3E
Channel Information.....:

Channel	Frequency(MHz)	Description	Channel	Frequency(MHz)	Description
1	462.5625	GMRS	12	467.6625	FRS
2	462.5875	GMRS	13	467.6875	FRS
3	462.6125	GMRS	14	467.7125	FRS
4	462.6375	GMRS	15	462.5500	GMRS
5	462.6625	GMRS	16	462.5750	GMRS
6	462.6875	GMRS	17	462.6000	GMRS
7	462.7125	GMRS	18	462.6250	GMRS
8	467.5625	FRS	19	462.6500	GMRS
9	467.5875	FRS	20	462.6750	GMRS
10	467.6125	FRS	21	462.7000	GMRS
11	467.6375	FRS	22	462.7250	GMRS

Test channel.....: Channel 4 GMRS mode 462.6375MHz
Channel 11 FRS mode 467.6375MHz
Power Supply: Battery 3 x AA size 1.5V alkaline batteries
A "Ni-MH" Type Rechargeable Battery 3.6V 1300mAh
High Voltage: 4.5V
Low Voltage: 3.1V

Note 1: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 95(Personal RADIO SERVICES) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 95	Personal Radio Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	2.1046, 95.639	RF Output Power	Pass
2	2.1047, 95.637	Modulation Characteristics	Pass
3	2.1049, 95.633, 95.635	Occupied Bandwidth And Emission Mask	Pass
4	2.1051, 95.635	Radiated Spurious Emission	Pass
5	2.1055, 95.621, 95.626	Frequency Stability	Pass
6	2.1093	RF exposure evaluation	Pass

NOTE:

The tests were performed according to the method of measurements prescribed in TIA- 603 -D.

1.3. Facilities and Accreditations

1.3.1. Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 695796.

1.3.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 25
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

1.3.3. Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Radiated Emission:	±3.0dB
-----------------------------------	--------

2. 47 CFR Part 95 Requirements

2.1. RF Output Power

2.1.1. Provisions Applicable

Per FCC §2.1046 and §95.639(d): No FRS unit, under any condition of modulation, shall exceed 0.500 W effective radiated power (ERP).


Per FCC §2.1046 and §95.639(a): No GMRS transmitter, under any condition of modulation, shall exceed 50 W Carrier power (average TP during one un-modulated RF cycle) when transmitting emission type A1D, F1D, G1D, A3E, F3E or G3E.

2.1.2. Test Procedure

1. On a test site, the EUT shall be placed at 1.6m height on a wooden turntable, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then be rotated through 360° in the horizontal plane, until a maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be oriented for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver

14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring received, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input signal to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
17. The measure of the ERP is the larger of the two levels recorded, at the input to the substitution antenna, corrected the gain of the substitution antenna if necessary.

2.1.3 Test Setup Block Diagram

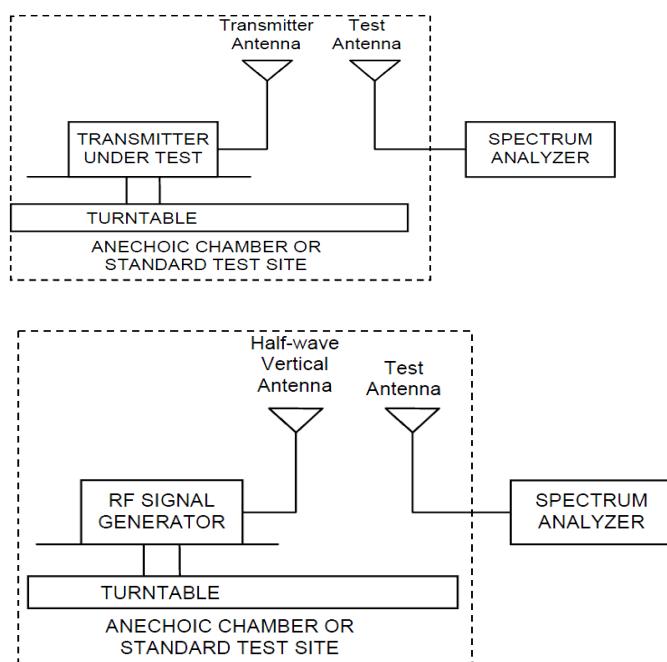

2.1.4 Test Instruments

Name Of Equipment	Manufacturer	Model	S/N	Cal.Date	Cal. Due Date
Test Antenna	Schwarzbeck	VULB9163	9163-274	2012.08.03	2013.08.02
Test Antenna	Satimo	SH400-067	cc1270107	2012.08.03	2013.08.02
Spectrum Analyzer	Agilent	E7405A	US44210471	2012.09.12	2013.09.11
Semi-Anechoic Chamber	ALBATROSS	9m*6m*6m	4771011001	2012.07.12	2013.07.11

2.1.5 Test Result

Channel	Channel Description	Frequency	Effective Radiated Power		Limit	Margin
		(MHz)	In dBm	In W	(w)	(w)
1	GMRS	462.5625	31.39	1.3772	50	48.6228
2		462.5875	31.62	1.4521	50	48.5479
3		462.6125	31.64	1.4588	50	48.5412
4		462.6375	31.47	1.4028	50	48.5972
5		462.6625	31.42	1.3868	50	48.6132
6		462.6875	31.54	1.4256	50	48.5744
7		462.7125	31.36	1.3677	50	48.6323
8	FRS	467.5625	25.45	0.3508	0.5	0.1492
9		467.5875	25.16	0.3281	0.5	0.1719
10		467.6125	25.32	0.3404	0.5	0.1596
11		467.6375	25.12	0.3251	0.5	0.1749
12		467.6625	25.19	0.3304	0.5	0.1696
13		467.6875	25.93	0.3917	0.5	0.1083
14		467.7125	25.46	0.3516	0.5	0.1484
15	GMRS	462.5500	31.73	1.4894	50	48.5106
16		462.5750	31.92	1.5560	50	48.4440
17		462.6000	31.86	1.5346	50	48.4654
18		462.6250	31.58	1.4388	50	48.5612
19		462.6500	31.75	1.4962	50	48.5038
20		462.6750	31.88	1.5417	50	48.4583
21		462.7000	31.68	1.4723	50	48.5277
22		462.7250	31.82	1.5205	50	48.4795

Test Result: PASS

3.1 Modulation Characteristics

3.1.1 Provisions Applicable

Per FCC §2.1047 and §95.637(a): A GMRS transmitter that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A FRS unit that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 2.5 kHz, and the audio frequency response must not exceed 3.125 kHz, the audio frequency response shall roll off before 3.125 kHz.

Each GMRS transmitter, except a mobile station transmitter with a power output of 2.5 W or less, must automatically prevent a greater than normal audio level from causing over-modulation. The transmitter also must include audio frequency low pass filtering, unless it complies with the applicable paragraphs of § 95.631 (without filtering.) The filter must be between the modulation limiter and the modulated stage of the transmitter. At any frequency (f in kHz) between 3 and 20 kHz, the filter must have an attenuation of at least $60 \log_{10} (f/3)$ dB greater than the attenuation at 1 kHz. Above 20 kHz, it must have an attenuation of at least 50 dB greater than the attenuation at 1 kHz.

3.1.2 Measurement Method

3.1.2.1 Frequency deviation

(1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1 kHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.

(2). Repeat step (1) with input frequency changing to 500, 1000, 2500 and 3125Hz in sequence.

3.1.2.2 Modulation Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio signal generator frequency to the sound pressure level 107dB SPL at the microphone of the EUT.
- (3). Vary the Audio frequency from 100 Hz to 5 kHz and record the frequency deviation.
- (4). The peak frequency deviation must not exceed ± 2.5 kHz.

3.1.2.3 Audio Low Pass Filter Response

- (1) Connect the equipment in figure 2.
- (2) Connect the audio frequency generator as close as possible the input of the post limiter low pass filter within the transmitter under test.
- (3) Connect the audio spectrum analyzer to the output of the post limiter low pass filter within

the transmitter under test.

- (4) Apply a 1000 Hz tone from the audio frequency generator and adjust the level per manufacturer's specifications.
- (5) Record the dB level of the 1000 Hz spectral line on the audio spectrum analyzer as LEV1 .
- (6) Set the audio frequency generator to the desired test frequency between 3000 Hz and the upper low pass filter limit.
- (7) Record audio spectrum analyzer levels, at the test frequency in step (6).
- (8) Record the dB level on the audio spectrum analyzer as LEV2 . Method of Measurement for Transmitters .

3.1.3 Test Setup Block Diagram

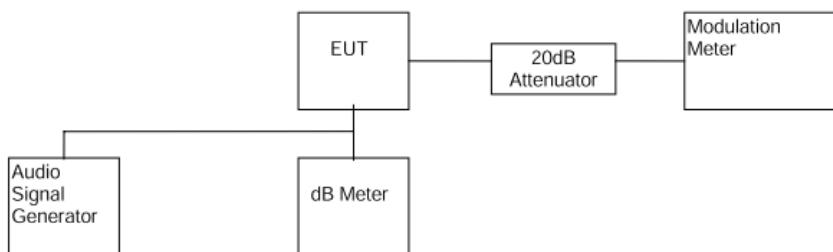


Figure 1

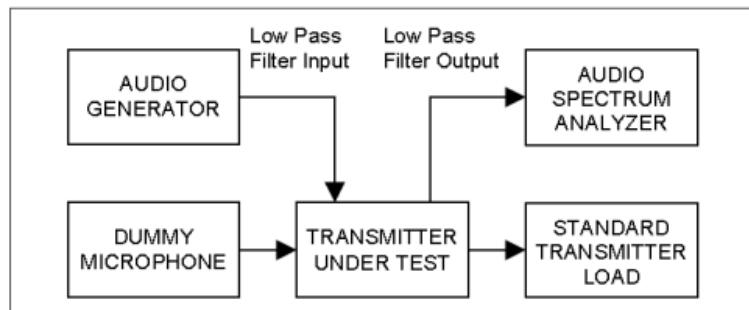


Figure 2


3.1.4 Measurement Instruments

Name Of Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due Date
Audio Signal Generator	R&S	UPV	17-253527	2012.9.9	2013.9.8
Modulation Analyzer	Agilent	8901B	2920A02186	2012.9.9	2013.9.8
Attenuator	SHX	DC-13	N.A	N.A	N.A

3.1.5 Test Result

a. Frequency deviation:


Channel 4: 462.6375MHz GMRS					
Modulation Input(dB)	Peak Frequency Deviation(KHz) at 500Hz	Peak Frequency Deviation(KHz) at 1000Hz	Peak Frequency Deviation(KHz) at 2500Hz	Peak Frequency Deviation(KHz) at 3125Hz	Limit (KHz)
-20.00	0.40	0.49	0.43	0.49	5.00
-15.00	0.46	0.60	0.45	0.45	5.00
-10.00	0.63	0.82	0.52	0.66	5.00
-5.00	0.64	1.02	0.78	0.72	5.00
0.00	0.79	1.58	0.93	0.79	5.00
5.00	1.05	2.20	1.29	1.11	5.00
10.00	1.69	2.01	2.18	1.62	5.00
15.00	2.35	2.09	2.45	1.97	5.00
20.00	2.47	2.19	2.32	2.01	5.00

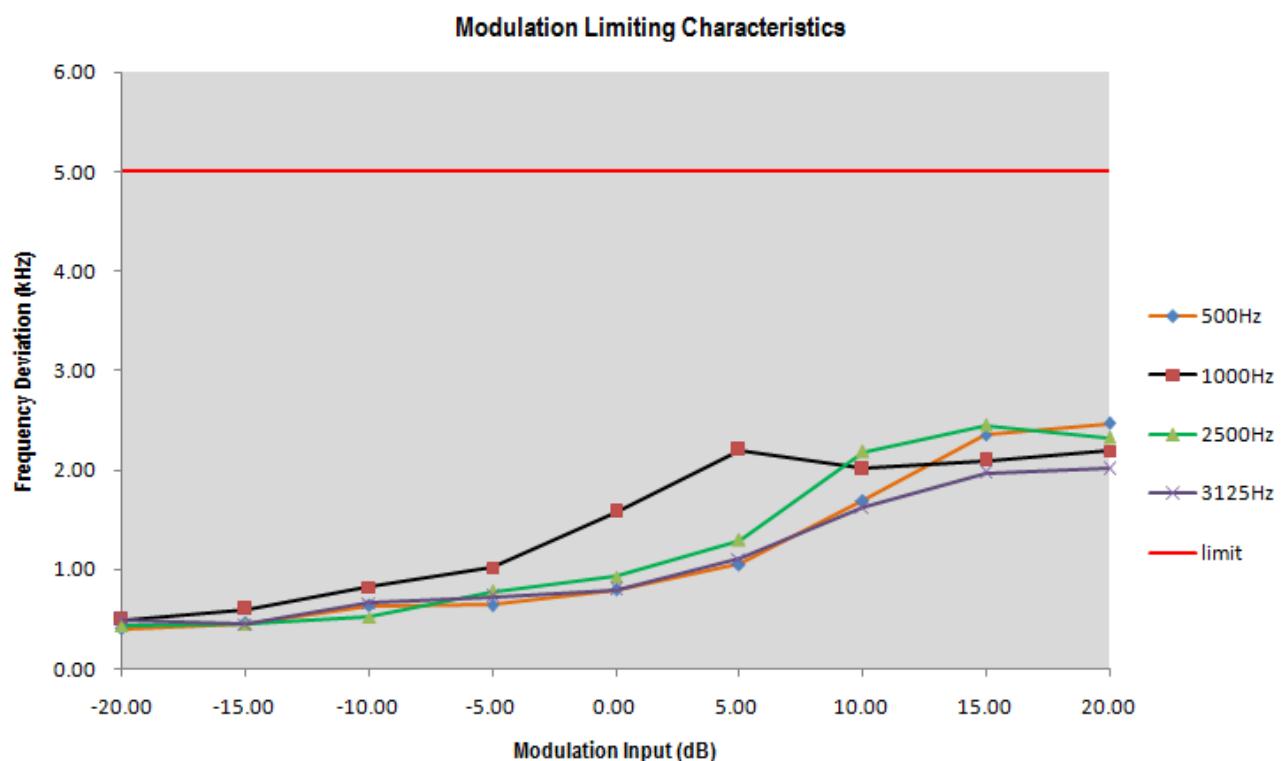

Channel 11 :467.6375MHz FRS

Modulation Input(dB)	Peak Frequency Deviation(KHz) at 500Hz	Peak Frequency Deviation(KHz) at 1000Hz	Peak Frequency Deviation(KHz) at 2500Hz	Peak Frequency Deviation(KHz) at 3125Hz	Limit (kHz)
-20.00	0.39	0.43	0.40	0.44	2.50
-15.00	0.41	0.52	0.49	0.45	2.50
-10.00	0.48	0.66	0.55	0.53	2.50
-5.00	0.60	1.05	0.69	0.70	2.50
0.00	0.75	1.43	1.02	1.11	2.50
5.00	0.92	1.78	1.39	1.26	2.50
10.00	1.49	2.16	1.87	1.69	2.50
15.00	1.75	2.10	2.14	2.06	2.50
20.00	1.89	2.19	2.25	1.99	2.50


Modulation Limiting Characteristics

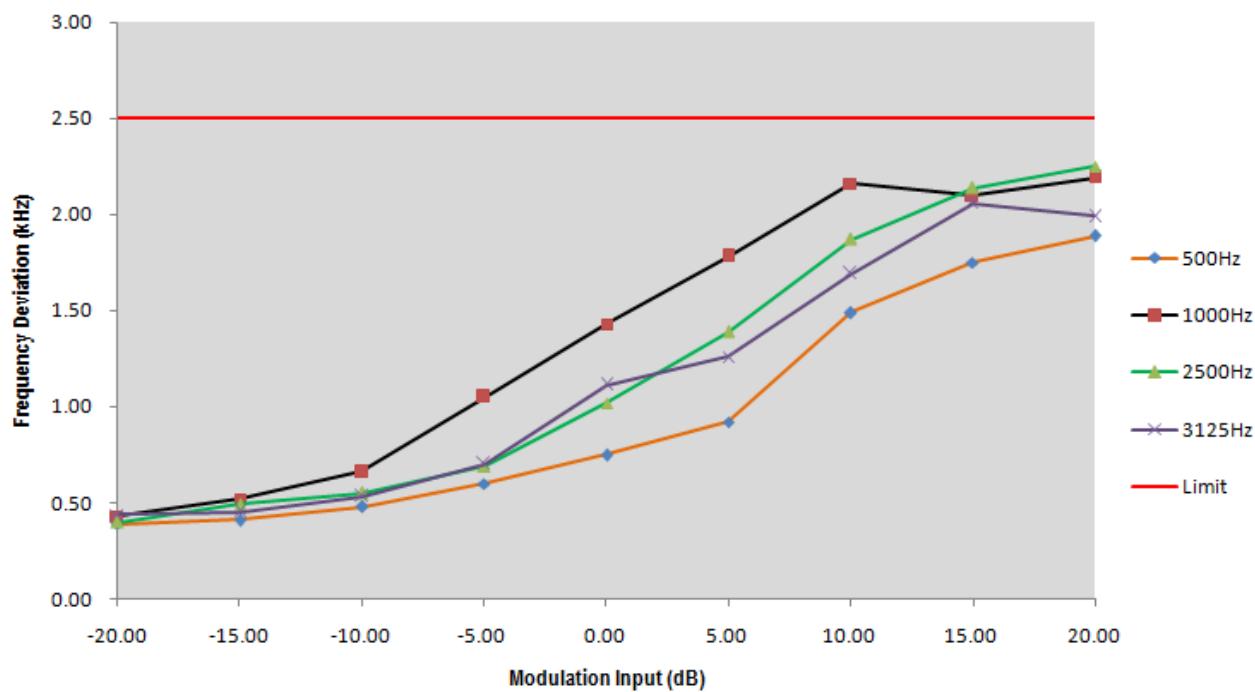

b. Audio Frequency Response

Channel 11 for FRS

Modulation Frequency(Hz)	Peak Modulation Deviation(KHz)	Limit (KHz)
100	0.35	2.5
200	0.48	2.5
300	1.18	2.5
400	1.98	2.5
500	2.01	2.5
600	2.1	2.5
700	2.12	2.5
800	2.15	2.5
900	2.16	2.5
1000	2.17	2.5
1250	2.21	2.5
1500	2.22	2.5
1750	2.25	2.5
2000	2.19	2.5
2250	2.26	2.5
2500	2.24	2.5
2750	2.15	2.5
3000	2.14	2.5
3125	2.06	2.5
3250	1.90	2.5
3500	1.87	2.5
4000	1.48	2.5
5000	0.8	2.5

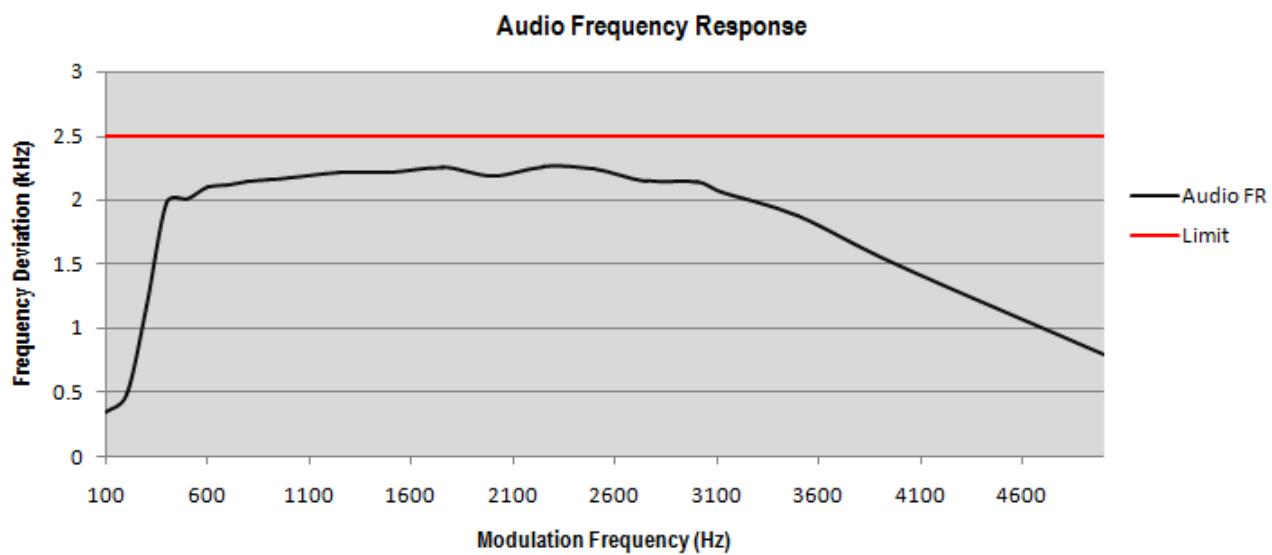


c. Audio Low Pass Filter Frequency Response

Channel 4 for GMRS

Frequency(KHz)	Response	Limit
1	0.00	0.00
2	0.00	0.00
3	-3.21	0.00
4	-14.02	-7.50
5	-21.66	-13.31
6	-26.26	-18.06
7	-30.42	-22.08
8	-33.00	-25.56
9	-35.22	-28.63
10	-38.28	-31.37
20	-58.36	-50.00
30	-58.36	-50.00
40	-58.36	-50.00
50	-58.36	-50.00
60	-58.36	-50.00
70	-58.36	-50.00
80	-58.36	-50.00
90	-58.36	-50.00
100	-58.36	-50.00

Audio Low Pass Filter Response

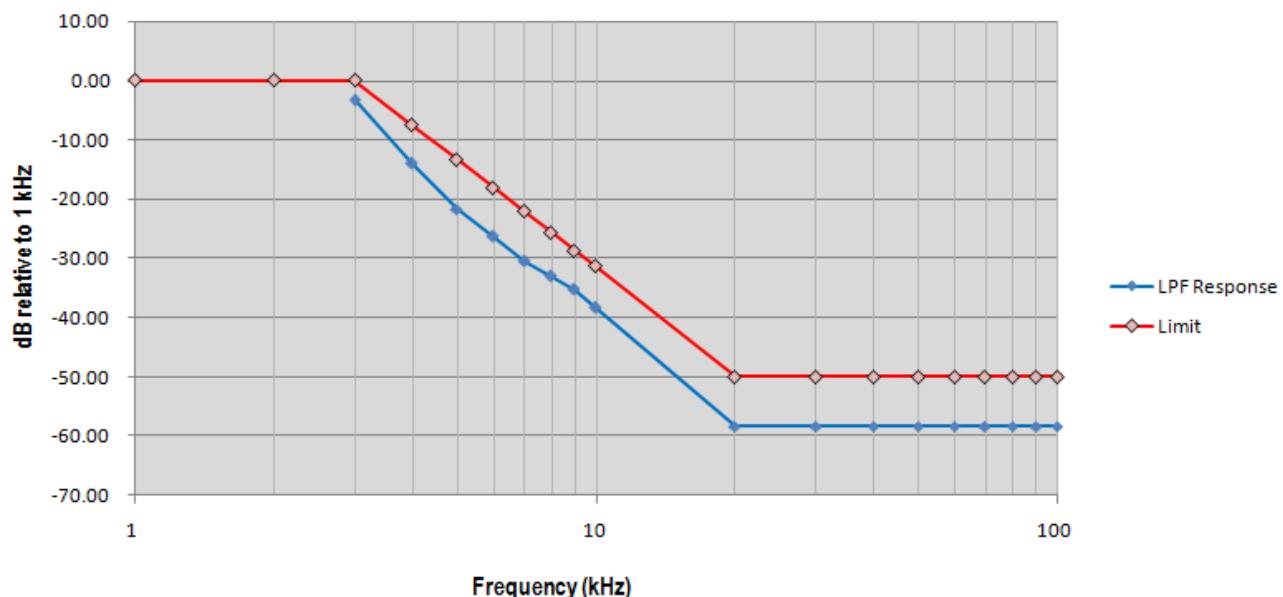**Test Result: PASS**

4.1 Occupied Bandwidth And Emission Mask

4.1.1 Provisions Applicable

According to §95.633(c) , the authorized bandwidth for emission type F3E or F2D transmitted by a FRS unit is 12.5 kHz. The authorized bandwidth for emission type F1D, G1D, F3E or G3E is 20 kHz.


The power of each unwanted emission shall be less than TP as specified in the applicable paragraphs listed in the following :

- 1) At least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- 2) At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
- 3) At least $43 + 10 \log_{10} (T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%, the calculation formulas and limit result refer **Section 5.1.5** note 2.

4.1.2 Measurement Procedure

- 1). The set-up test equipment in the following configuration:
- 2). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).
- 3). Set SPA Center Frequency = fundamental frequency, RBW=VBW= 300 Hz, Span =20 KHz.
- 4). Set SPA Max hold. Mark peak, -20 dB.

4.1.3 Test Setup Block Diagram

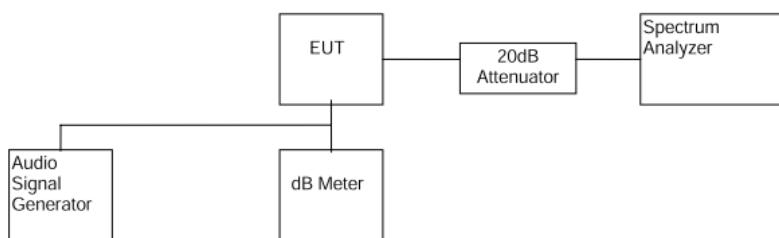


4.1.4 Test Instruments


Name Of Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due Date
Spectrum Analyzer	R&S	FSU-8	200034	2012.9.3	2013.9.2
Modulation Analyzer	Agilent	8901B	2920A02186	2012.9.9	2013.9.8
Audio Signal Generator	R&S	UPV	17-253527	2012.9.9	2013.9.8
Attenuator	SHX	DC-13	N.A	N.A	N.A

4.1.5 Test Result

The occupied Bandwidth is measured to be 5.55 KHz for GMRS and 5.60KHz for FRS

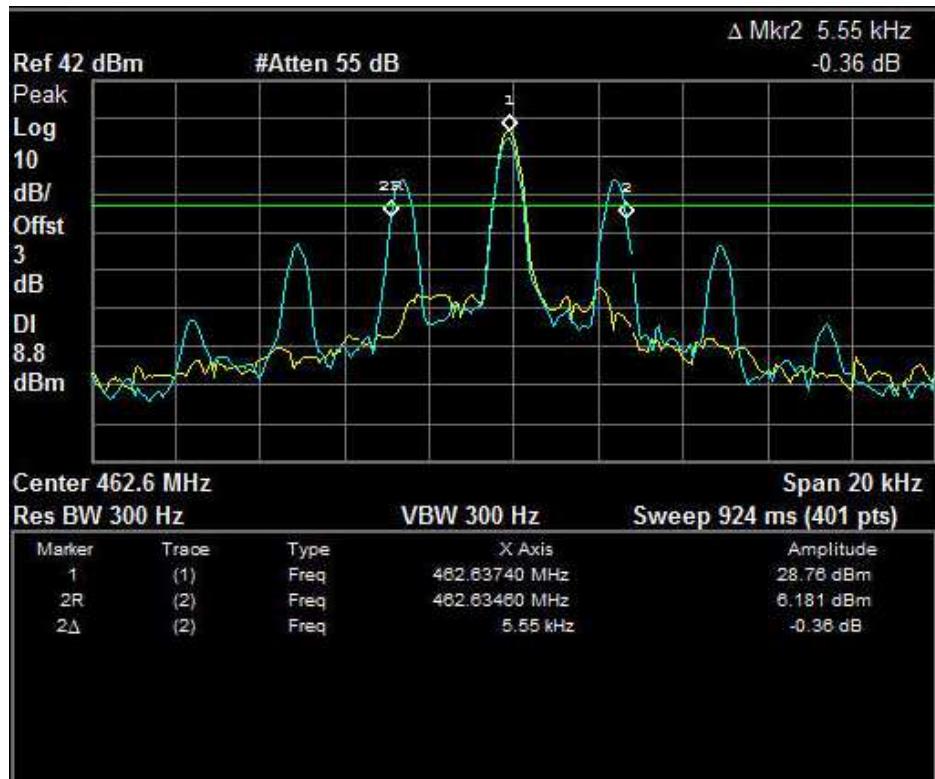


Channel 4 462.6375MHz GMRS

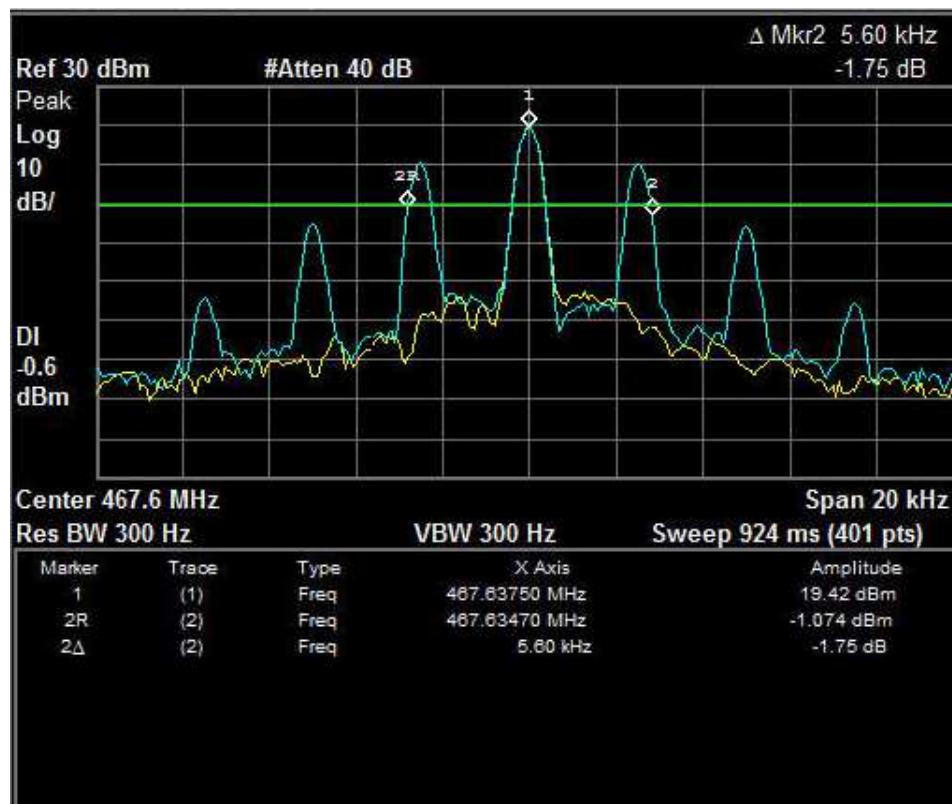


Channel 11 467.6375Mhz FRS

Emission Mask:

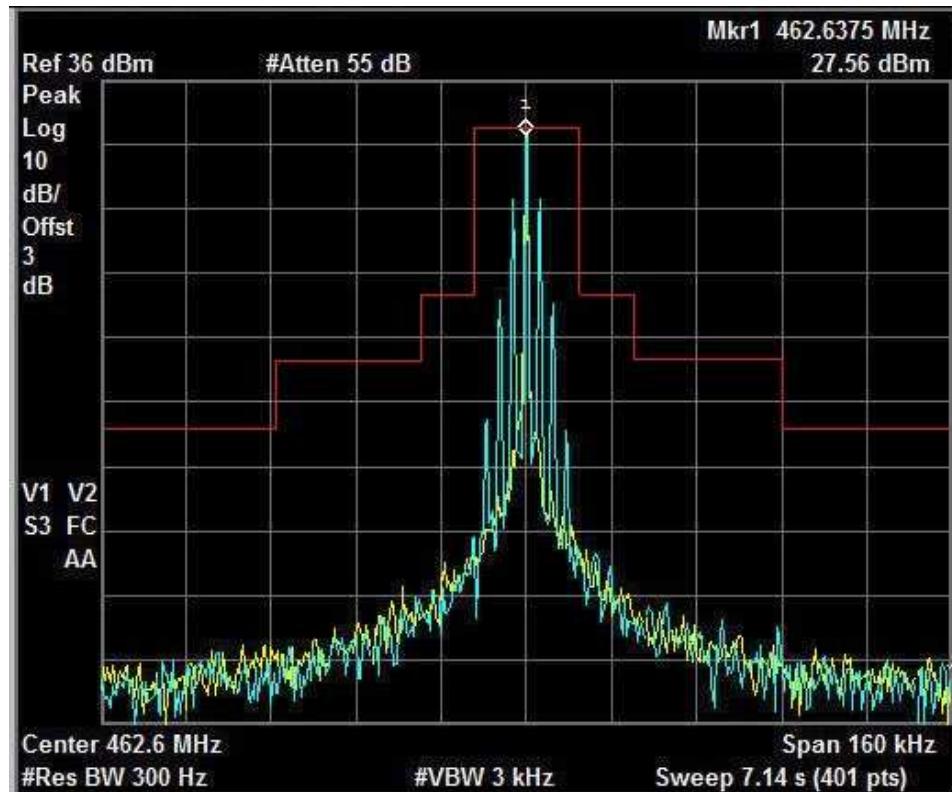

Channel 4 :462.6375MHz GMRS

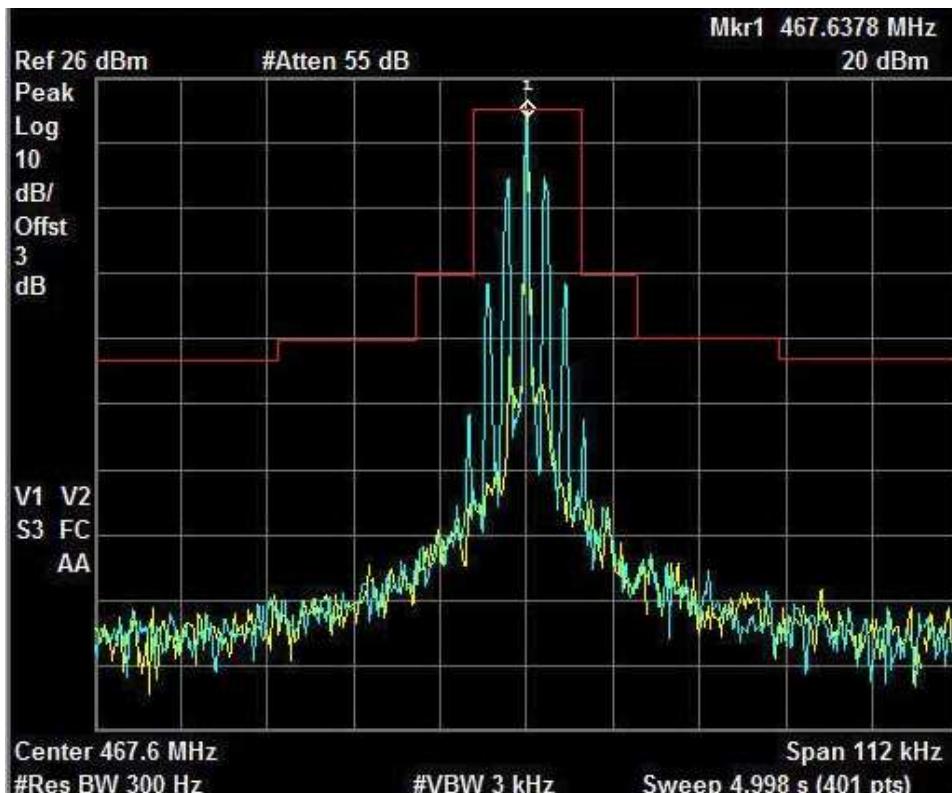

Channel 11:467.6375MHz FRS

Test Result: PASS

5.1 Spurious Emission

5.1.1 Provisions Applicable

According to FCC section 95.635(b7), the unwanted emission should be attenuated below TP by at least $43 + 10\log(\text{Transmit Power})$ dB.

5.1.2 Measurement Procedure

(1) On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.

(2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.

(3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.

(4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.

(5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.

(6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.

(7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.

(8) The maximum signal level detected by the measuring receiver shall be noted.

(9) The measurement shall be repeated with the test antenna set to horizontal polarization.

(10) Replace the antenna with a proper Antenna (substitution antenna).

(11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.

(12) The substitution antenna shall be connected to a calibrated signal generator.

(13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.

(14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.


(15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.

(16) The input level to the substitution antenna shall be recorded as power level in dBm,

corrected for any change of input attenuator setting of the measuring receiver.

(17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

5.1.3 Test Setup Block Diagram

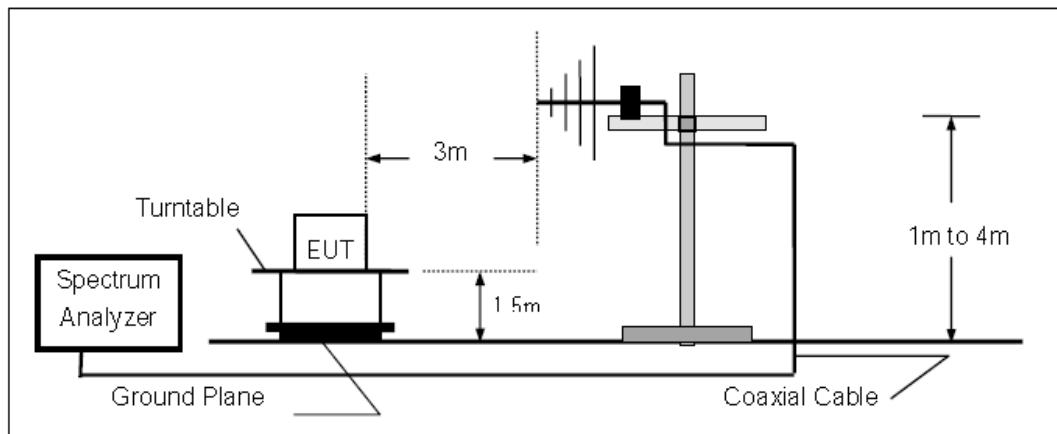

5.1.4 Measurement Instruments

Name Of Equipment	Manufacturer	Model	S/N	Cal Date	Cal. Due Date
Test Antenna - Bi-Log	Schaffner	CBL6112B	2529	2012.08.12	2013.08.11
Test Antenna - Bi-Log	Schaffner	Dvulp9118	2529	2012.08.12	2013.08.11
Receiver	R&S	ESU	100204	2012.07.12	2013.07.11
Semi-Anechoic Chamber	ALBATROSS	9m*6m*6m	4771011001	2012.07.12	2013.07.11
Test Antenna - Horn	Dahua	DH610-2	0911120001	2012.08.12	2013.08.11
Test Antenna - Horn	Dahua	DH610-2	89010	2012.08.12	2013.08.11

5.1.5 Test Result

Test mode 1: GMRS mode continue transmitting

Channel 4; Frequency= 462.6375MHz;

Frequency	Polar	Absolute lever	Channel Max. Power	Spurious Attenuation	FCC Part 95 Limit	Margin
MHz	H / V	dBm	dBm	dBc	dBc	dB
938.489	H	-41.42	31.47	72.89	44.47	28.42
1453.873	H	-43.16		74.63	44.47	30.16
2815.436	H	-46.40		77.87	44.47	33.40
3703.134	H	-48.15		-79.62	44.47	35.15
4162.654	H	-47.18		-78.65	44.47	34.18
4627.406	H	-47.89		-79.36	44.47	34.89
934.586	V	-40.55		72.02	44.47	27.55
1398.725	V	-42.08		73.55	44.47	29.08
2734.693	V	-45.61		77.08	44.47	32.61
3704.518	V	-47.53		-79.00	44.47	34.53
4165.185	V	-48.48		-79.95	44.47	35.48
4626.352	V	-47.61		-79.08	44.47	34.61

Test mode 2: FRS mode continue transmitting

Channel 11; Frequency= 467.6375MHz;

Frequency	Polar	Absolute lever	Channel Max. Power	Spurious Attenuation	FCC Part 95 Limit	Margin
MHz	H / V	dBm	dBm	dBc	dBc	dB
924.481	H	-39.42	25.12	64.54	38.12	26.42
1439.571	H	-40.16		65.28	38.12	27.16
2875.364	H	-42.23		67.35	38.12	29.23
3274.462	H	-44.12		-69.24	38.12	31.12
3742.154	H	-45.71		-70.83	38.12	32.71
4676.854	H	-45.94		-71.06	38.12	32.94
919.072	V	-38.58		63.70	38.12	25.58
1487.689	V	-42.15		67.27	38.12	29.15
2789.675	V	-45.52		70.64	38.12	32.52
3273.603	V	-45.49		-70.61	38.12	32.49
3744.168	V	-45.14		-70.26	38.12	32.14
4674.563	V	-46.15		-71.27	38.12	33.15

Note:

1. Spurious Attenuation= Channel Max. Power - Absolute lever
2. Limit= $43+10 \log$ (Channel Max. Power in Watts)
The limit for channel 4= $43+10\log (1.4028) =44.47\text{dB}$
The limit for channel 11= $43+10\log (0.3251) =38.12\text{dB}$
3. Margin= Spurious Attenuation- limit
4. Only emissions significantly above measuring equipment noise floor are reported.

Test Result: PASS

6.1 Frequency Stability

6.1.1 Provisions Applicable

According to FCC Section 95.627, the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$ centigrade. Each FRS unit must be maintained within a frequency tolerance of 0.00025%.

According to FCC Section 95.621, the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$ centigrade. Each GMRS transmitter for mobile station, small base station and control station operation must be maintained within a frequency tolerance of 0.0005%.

6.1.2 Measurement Procedure


6.1.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.1.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C . Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 4.5 V
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.1.3 Test Setup Block Diagram

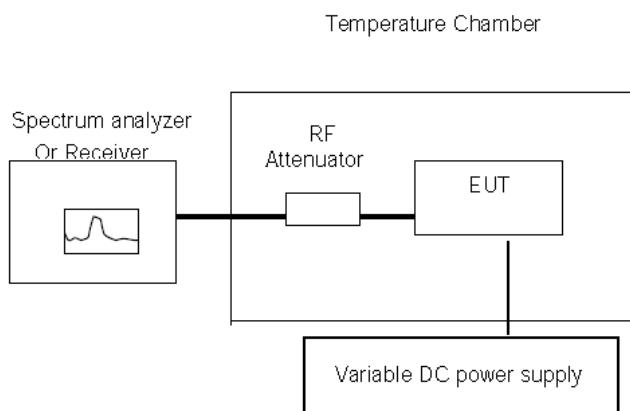

6.1.4 Measurement Instruments

Name Of Equipment	Manufacturer	Model	S/N	Cal Date	Cal. Due Date
Spectrum Analyzer	R&S	FSU-8	200034	2012.9.3	2013.9.2
Power Supply	Agilent	66319D	MY43000556	2012.9.3	2013.9.2
Climate Chamber	Votsch	VT4002	58566087750080	2013.1.9	2014.1.8

6.1.5 Test result

Frequency Tolerance GMRS				
Channel	Frequency(MHz)	Measured(MHz)	Tolerance(%)	Limit(%)
1	462.5625	462.5626	0.000022	0.0005
2	462.5875	462.5876	0.000022	0.0005
3	462.6125	462.6126	0.000022	0.0005
4	462.6375	462.6377	0.000043	0.0005
5	462.6625	462.6626	0.000022	0.0005
6	462.6875	462.6876	0.000022	0.0005
7	462.7125	462.7127	0.000043	0.0005
Frequency Tolerance FRS				
8	467.5625	467.5626	0.000021	0.00025
9	467.5875	467.5876	0.000021	0.00025
10	467.6125	467.6128	0.000064	0.00025
11	467.6375	467.6376	0.000021	0.00025
12	467.6625	467.6626	0.000021	0.00025
13	467.6875	467.6878	0.000064	0.00025
14	467.7125	467.7127	0.000043	0.00025
Frequency Tolerance GMRS				
15	462.5500	462.5504	0.000086	0.0005
16	462.5750	462.5751	0.000022	0.0005

17	462.6000	462.6005	0.000108	0.0005
18	462.6250	462.6251	0.000022	0.0005
19	462.6500	462.6502	0.000043	0.0005
20	462.6750	462.6754	0.000086	0.0005
21	462.7000	462.7003	0.000065	0.0005
22	462.7250	462.7251	0.000022	0.0005

Frequency Deviation With Temperature Variation					
Channel	4 GMRS				
Temperature (°C)	Assigned Frequency (MHz)	Measured Frequency(MHz)	Deviation (%)	Limit (%)	Frequency Tolerance (ppm)
-30	462.6375	462.6379	0.000086	0.0005	0.4323
-20	462.6375	462.6378	0.000065	0.0005	0.2162
-10	462.6375	462.6379	0.000086	0.0005	0.4323
0	462.6375	462.6376	0.000022	0.0005	0.2162
10	462.6375	462.6376	0.000022	0.0005	0.2162
20	462.6375	462.6377	0.000043	0.0005	0.0000
30	462.6375	462.6377	0.000043	0.0005	0.0000
40	462.6375	462.6378	0.000065	0.0005	0.2162
50	462.6375	462.6379	0.000086	0.0005	0.4323
Channel	11 FRS				
Temperature (°C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	Deviation (%)	Limit (%)	Frequency Tolerance (ppm)
-30	467.6375	467.6378	0.000064	0.00025	0.2092
-20	467.6375	467.6377	0.000043	0.00025	0.0046
-10	467.6375	467.6378	0.000064	0.00025	0.2092
0	467.6375	467.6376	0.000021	0.00025	0.2185
10	467.6375	467.6376	0.000021	0.00025	0.2185
20	467.6375	467.6377	0.000043	0.00025	0.0046
30	467.6375	467.6378	0.000064	0.00025	0.2092
40	467.6375	467.6376	0.000021	0.00025	0.2185
50	467.6375	467.6379	0.000086	0.00025	0.4231
Frequency Tolerance with reference to its value at 20°C					

Frequency Deviation With Voltage Variation					
Channel	Frequency(MHz)	Voltage(V)	Measured(MHz)	Tolerance(%)	Limit(%)
4 GMRS	462.6375	3.1	462.6378	0.000065	0.0005
		3.2	462.6378	0.000065	0.0005
		3.3	462.6376	0.000022	0.0005
		3.4	462.6376	0.000022	0.0005
		3.5	462.6376	0.000022	0.0005
		3.6	462.6375	0.000000	0.0005
		3.7	462.6379	0.000086	0.0005
		3.8	462.6376	0.000022	0.0005
		3.9	462.6376	0.000022	0.0005
		4.1	462.6377	0.000043	0.0005
		4.2	462.6378	0.000065	0.0005
		4.3	462.6377	0.000043	0.0005
		4.4	462.6379	0.000086	0.0005
		4.5	462.6378	0.000065	0.0005
11 FRS	467.6375	3.1	467.6377	0.000043	0.00025
		3.2	467.6376	0.000021	0.00025
		3.3	467.6377	0.000043	0.00025
		3.4	467.6378	0.000064	0.00025
		3.5	467.6378	0.000064	0.00025
		3.6	467.6376	0.000021	0.00025
		3.7	467.6376	0.000021	0.00025
		3.8	467.6375	0.000000	0.00025
		3.9	467.6376	0.000021	0.00025
		4.1	467.6376	0.000021	0.00025
		4.2	467.6377	0.000043	0.00025
		4.3	467.6376	0.000021	0.00025
		4.4	467.6377	0.000043	0.00025
		4.5	467.6378	0.000064	0.00025

Test Result: PASS

7.1 RF exposure evaluation

7.1.1 Test result

This is a portable device which compliance with part 2.1093, please refer to SAR test report.

7.2 Declaration Of Identity



GIANT TELECOM LTD.

HONG KONG HEADQUARTERS:
33/F, Two Landmark East, 100 How Ming Road, Kwin Tong,
Kowloon, Hong Kong
Tel: (852) 2797 3363 (20 Lines) Fax: (852) 2341 5922

 **嘉音电讯有限公司**

香港總辦事處：
香港九龍觀塘巧明街100號城東中心二期三十三樓全層
電話：(852) 2797 3363 (二十線) 傳真：(852) 2341 5922

Declaration

May 22, 2013

To whom it may concern,

With regards to the Walkie Talkie model name: MU560CR/MU350R/MU351R

According to the designer, Giant Telecom Ltd., we hereby declare that the models: MU560CR, MU351R are same with MU350R, There are no change in hardware and software. Only differ in model name,

The application information of models: MU560CR/MU350R/MU351R identify except mentioned above.

Declare by: Giant Telecom Ltd.



Kun Xiong

Giant Telecom Ltd.

A. Manager

** END OF REPORT **