

Tested By:Hong, Report No.:06063062

Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0699
12	9k	30M	EW0192

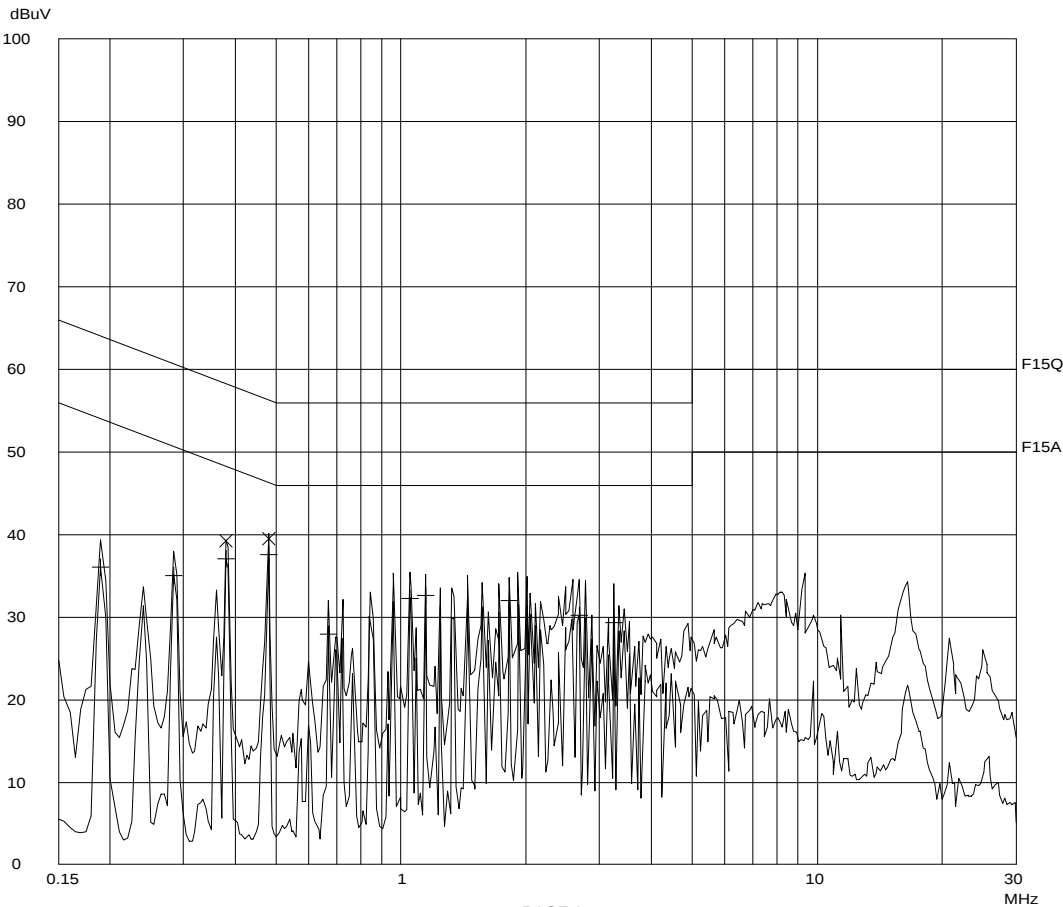

Report No.: 06063062
Communicating Mode
PC's AC Port

Tested By: Hong, Report No.: 06063062

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV
0.38000	39.2	58.3
0.48000	39.5	56.4

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV
0.19000	36.1	54.1
0.28500	35.0	50.7
0.38000	37.0	48.3
0.48000	37.5	46.4
0.67000	27.9	46.0
1.05000	32.2	46.0
1.14500	32.5	46.0
1.81500	31.9	46.0
2.68000	30.2	46.0
3.25000	29.3	46.0

* limit