

Tested By:Hong, Report No.:06130911

Scan Settings (1 Range)

| Frequencies |      |      |       | Receiver Settings |        |       |              |
|-------------|------|------|-------|-------------------|--------|-------|--------------|
| Start       | Stop | Step | IF BW | Detector          | M-Time | Atten | Preamp OpRge |
| 150k        | 30M  | 5k   | 10k   | PK+AV             | 10ms   | AUTO  | LN OFF 60dB  |


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

| Transducer No. | Start | Stop | Name   |
|----------------|-------|------|--------|
| 2 1            | 9k    | 30M  | EW0699 |
| 12             | 9k    | 30M  | EW0192 |

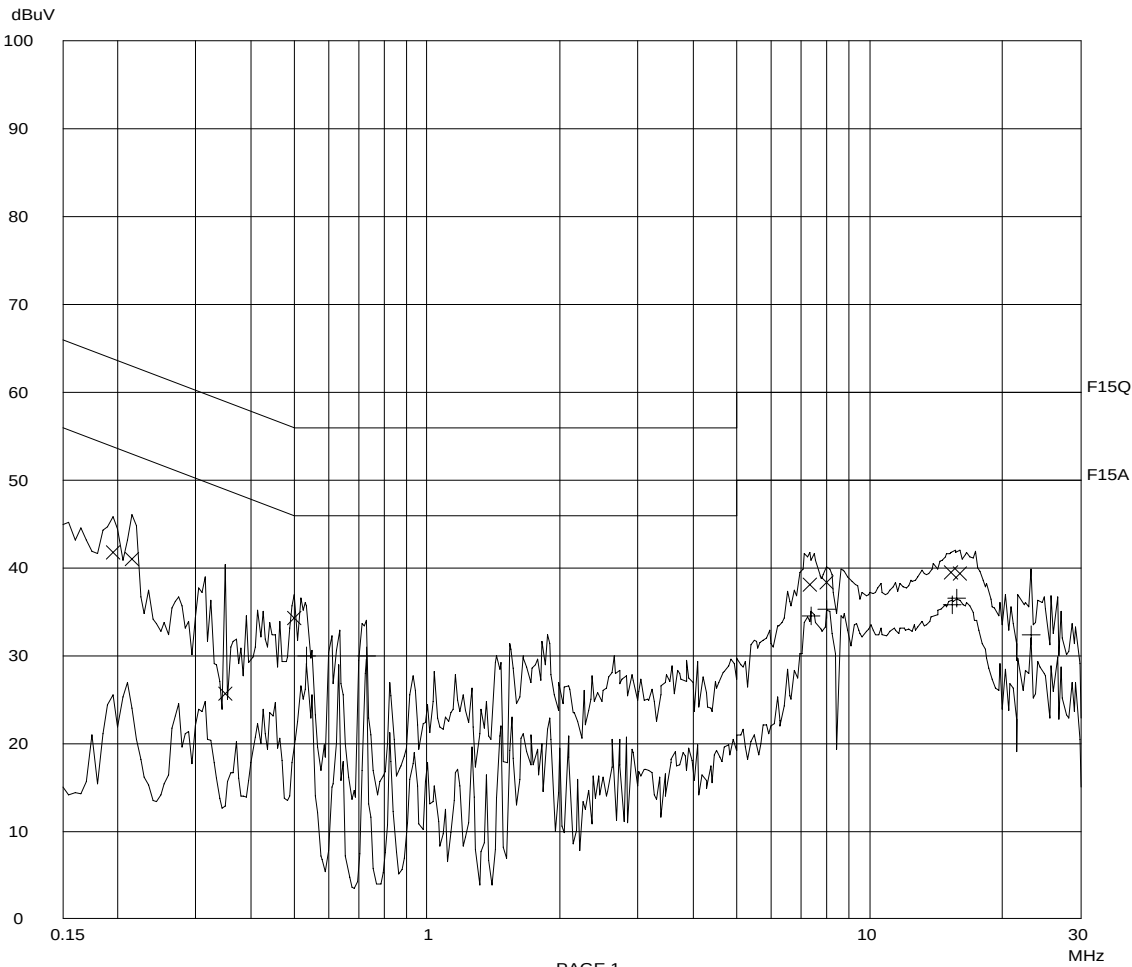

Report No.: 06130911  
Talk Mode  
PC's AC Port

Tested By: Hong, Report No.: 06130911

#### Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|  
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge  
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

#### Final Measurement Results:

#### Frequency QP Level QP Limit

MHz dBuV dBuV

|          |      |      |
|----------|------|------|
| 0.19500  | 41.7 | 63.9 |
| 0.21500  | 41.0 | 63.0 |
| 0.35000  | 25.7 | 59.0 |
| 0.50000  | 34.2 | 56.0 |
| 7.32500  | 38.0 | 60.0 |
| 8.00000  | 38.4 | 60.0 |
| 15.33000 | 39.5 | 60.0 |
| 16.00000 | 39.3 | 60.0 |

#### Frequency AV Level AV Limit

MHz dBuV dBuV

|          |      |      |
|----------|------|------|
| 0.53500  | 29.9 | 46.0 |
| 0.73000  | 29.9 | 46.0 |
| 7.39000  | 34.4 | 50.0 |
| 8.00000  | 35.2 | 50.0 |
| 15.39000 | 35.8 | 50.0 |
| 15.75500 | 36.5 | 50.0 |
| 23.13000 | 32.4 | 50.0 |

\* limit



Tested By:Hong, Report No.:06130911

Scan Settings (1 Range)

| Frequencies |      |      |       | Receiver Settings |        |       |        |       |
|-------------|------|------|-------|-------------------|--------|-------|--------|-------|
| Start       | Stop | Step | IF BW | Detector          | M-Time | Atten | Preamp | OpRge |
| 150k        | 30M  | 5k   | 10k   | PK+AV             | 10ms   | AUTO  | LN OFF | 60dB  |


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

| Transducer No. | Start | Stop | Name   |
|----------------|-------|------|--------|
| 2 1            | 9k    | 30M  | EW0699 |
| 12             | 9k    | 30M  | EW0192 |

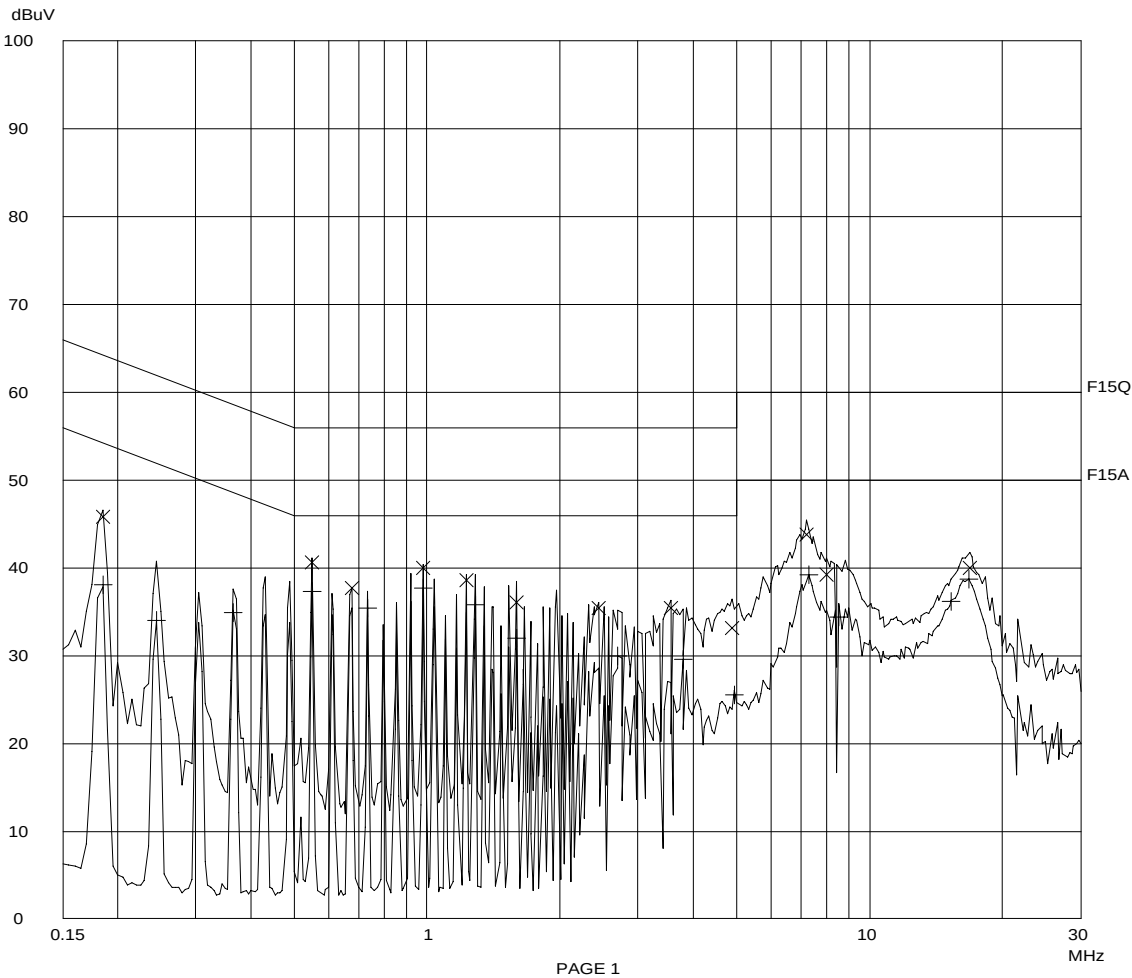

Report No.: 06130911  
Talk Mode  
EUT's AC Port

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

| Start | Stop | Step | IF BW | Detector | M-Time | Atten | Preamp | OpRge |
|-------|------|------|-------|----------|--------|-------|--------|-------|
| 150k  | 30M  | 5k   | 10k   | PK+AV    | 10ms   | AUTO  | LN OFF | 60dB  |

Final Measurement Results:

| Frequency | QP Level | QP Limit |
|-----------|----------|----------|
| MHz       | dBuV     | dBuV     |

|          |      |      |
|----------|------|------|
| 0.18500  | 45.7 | 64.3 |
| 0.55000  | 40.5 | 56.0 |
| 0.67500  | 37.6 | 56.0 |
| 0.98000  | 40.0 | 56.0 |
| 1.22500  | 38.6 | 56.0 |
| 1.59000  | 36.0 | 56.0 |
| 2.45000  | 35.4 | 56.0 |
| 3.55000  | 35.3 | 56.0 |
| 4.89500  | 33.0 | 56.0 |
| 7.22500  | 43.8 | 60.0 |
| 8.02000  | 39.2 | 60.0 |
| 16.83500 | 40.0 | 60.0 |

| Frequency | AV Level | AV Limit |
|-----------|----------|----------|
| MHz       | dBuV     | dBuV     |

|          |      |      |
|----------|------|------|
| 0.18500  | 38.0 | 54.3 |
| 0.24500  | 33.9 | 51.9 |
| 0.36500  | 34.9 | 48.6 |
| 0.55000  | 37.3 | 46.0 |
| 0.73500  | 35.4 | 46.0 |
| 0.98000  | 37.7 | 46.0 |
| 1.28500  | 35.8 | 46.0 |
| 1.59000  | 32.0 | 46.0 |
| 2.69500  | 29.9 | 46.0 |
| 3.79500  | 29.5 | 46.0 |
| 4.96000  | 25.5 | 46.0 |
| 7.28500  | 39.1 | 50.0 |
| 8.51000  | 34.4 | 50.0 |
| 15.30500 | 36.2 | 50.0 |
| 16.77500 | 38.6 | 50.0 |

\* limit

Report No.: 06130911  
 Ringing Mode  
 EUT's AC Port "L"

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

| Frequencies |      |      | Receiver Settings |          |        |       |              |
|-------------|------|------|-------------------|----------|--------|-------|--------------|
| Start       | Stop | Step | IF BW             | Detector | M-Time | Atten | Preamp OpRge |
| 150k        | 30M  | 5k   | 10k               | PK+AV    | 10ms   | AUTO  | LN OFF 60dB  |


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

| Transducer No. | Start | Stop | Name   |
|----------------|-------|------|--------|
| 2              | 1 9k  | 30M  | EW0699 |
| 12             | 9k    | 30M  | EW0192 |

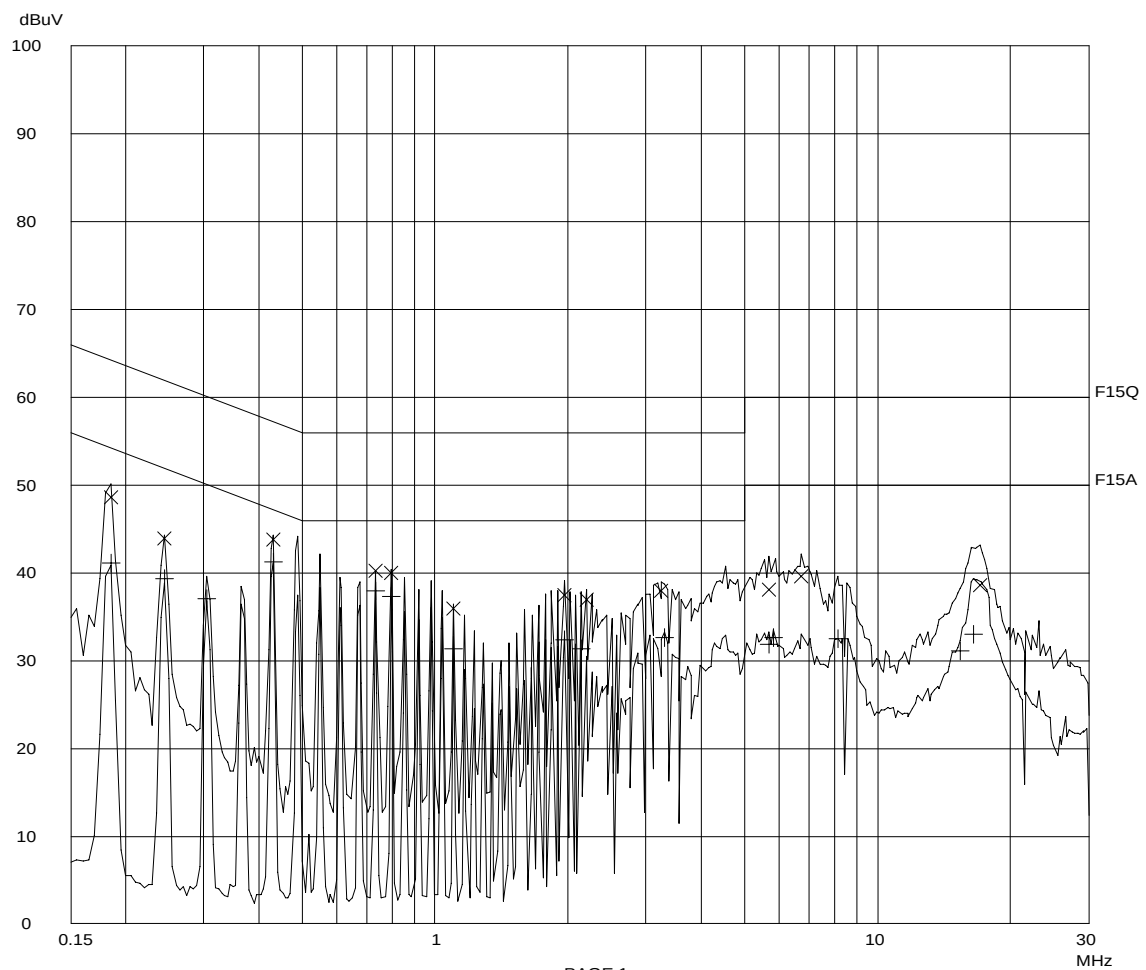

Report No.: 06130911  
 Ringing Mode  
 EUT's AC Port "L"

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

| Start | Stop | Step | IF BW | Detector | M-Time | Atten | Preamp | OpRge |
|-------|------|------|-------|----------|--------|-------|--------|-------|
| 150k  | 30M  | 5k   | 10k   | PK+AV    | 10ms   | AUTO  | LN OFF | 60dB  |

Final Measurement Results:

| Frequency | QP Level | QP Limit |
|-----------|----------|----------|
| MHz       | dBuV     | dBuV     |

|          |      |      |
|----------|------|------|
| 0.18500  | 48.6 | 64.3 |
| 0.24500  | 43.9 | 61.9 |
| 0.43000  | 43.7 | 57.3 |
| 0.73500  | 40.2 | 56.0 |
| 0.79500  | 40.0 | 56.0 |
| 1.10000  | 35.8 | 56.0 |
| 1.96000  | 37.4 | 56.0 |
| 2.20500  | 36.9 | 56.0 |
| 3.24500  | 37.9 | 56.0 |
| 5.69500  | 38.1 | 60.0 |
| 6.73500  | 39.5 | 60.0 |
| 17.07500 | 38.5 | 60.0 |

| Frequency | AV Level | AV Limit |
|-----------|----------|----------|
| MHz       | dBuV     | dBuV     |

|          |      |      |
|----------|------|------|
| 0.18500  | 41.0 | 54.3 |
| 0.24500  | 39.3 | 51.9 |
| 0.30500  | 37.0 | 50.1 |
| 0.43000  | 41.3 | 47.3 |
| 0.73500  | 38.0 | 46.0 |
| 0.79500  | 37.3 | 46.0 |
| 1.10000  | 31.3 | 46.0 |
| 1.96000  | 32.4 | 46.0 |
| 2.14000  | 31.3 | 46.0 |
| 3.30500  | 32.6 | 46.0 |
| 5.69500  | 31.9 | 50.0 |
| 5.81500  | 32.6 | 50.0 |
| 8.14000  | 32.5 | 50.0 |
| 15.42500 | 31.0 | 50.0 |
| 16.52500 | 33.0 | 50.0 |

\* limit

Report No.: 06130911  
 Ringing Mode  
 EUT's AC Port "N"

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

| Frequencies |      |      | Receiver Settings |          |        |       |              |
|-------------|------|------|-------------------|----------|--------|-------|--------------|
| Start       | Stop | Step | IF BW             | Detector | M-Time | Atten | Preamp OpRge |
| 150k        | 30M  | 5k   | 10k               | PK+AV    | 10ms   | AUTO  | LN OFF 60dB  |

Final Measurement: x QP / + AV


Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

| Transducer No. | Start | Stop | Name |
|----------------|-------|------|------|
|----------------|-------|------|------|

|   |    |    |     |        |
|---|----|----|-----|--------|
| 2 | 1  | 9k | 30M | EW0699 |
|   | 12 | 9k | 30M | EW0192 |

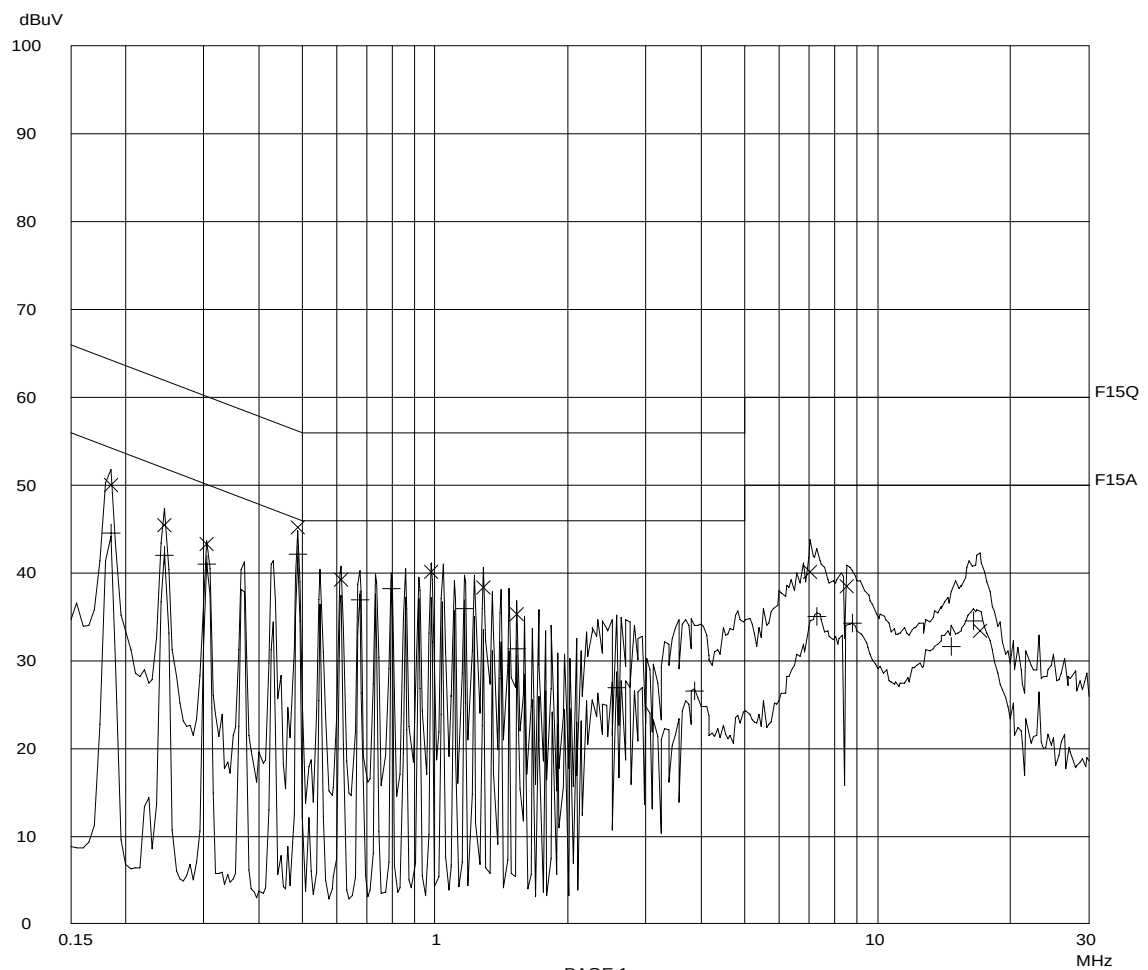

Report No.: 06130911  
 Ringing Mode  
 EUT's AC Port "N"

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

| Start | Stop | Step | IF BW | Detector | M-Time | Atten | Preamp | OpRge |
|-------|------|------|-------|----------|--------|-------|--------|-------|
| 150k  | 30M  | 5k   | 10k   | PK+AV    | 10ms   | AUTO  | LN OFF | 60dB  |

Final Measurement Results:

| Frequency | QP Level | QP Limit |
|-----------|----------|----------|
| MHz       | dBuV     | dBuV     |

|          |      |      |
|----------|------|------|
| 0.18500  | 49.9 | 64.3 |
| 0.24500  | 45.4 | 61.9 |
| 0.30500  | 43.2 | 60.1 |
| 0.49000  | 45.1 | 56.2 |
| 0.61500  | 39.2 | 56.0 |
| 0.98000  | 40.1 | 56.0 |
| 1.28500  | 38.3 | 56.0 |
| 1.53000  | 35.3 | 56.0 |
| 7.04500  | 40.1 | 60.0 |
| 8.51500  | 38.4 | 60.0 |
| 17.09000 | 33.4 | 60.0 |

| Frequency | AV Level | AV Limit |
|-----------|----------|----------|
| MHz       | dBuV     | dBuV     |

|          |      |      |
|----------|------|------|
| 0.18500  | 44.4 | 54.3 |
| 0.24500  | 42.0 | 51.9 |
| 0.30500  | 40.9 | 50.1 |
| 0.49000  | 42.0 | 46.2 |
| 0.67500  | 36.9 | 46.0 |
| 0.79500  | 38.1 | 46.0 |
| 1.16500  | 35.9 | 46.0 |
| 1.53000  | 31.3 | 46.0 |
| 2.57500  | 26.9 | 46.0 |
| 3.86000  | 26.5 | 46.0 |
| 7.29000  | 35.0 | 50.0 |
| 8.76000  | 34.3 | 50.0 |
| 14.70000 | 31.5 | 50.0 |
| 16.47500 | 34.5 | 50.0 |

\* limit



Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

| Frequencies |      |      |       | Receiver Settings |        |         |              |
|-------------|------|------|-------|-------------------|--------|---------|--------------|
| Start       | Stop | Step | IF BW | Detector          | M-Time | Atten   | Preamp OpRge |
| 150k        | 30M  | 5k   | 10k   | PK+AV             | 10ms   | AUTO LN | OFF 60dB     |


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

| Transducer No. | Start | Stop | Name   |
|----------------|-------|------|--------|
| 2 1            | 9k    | 30M  | EW0699 |
| 12             | 9k    | 30M  | EW0192 |

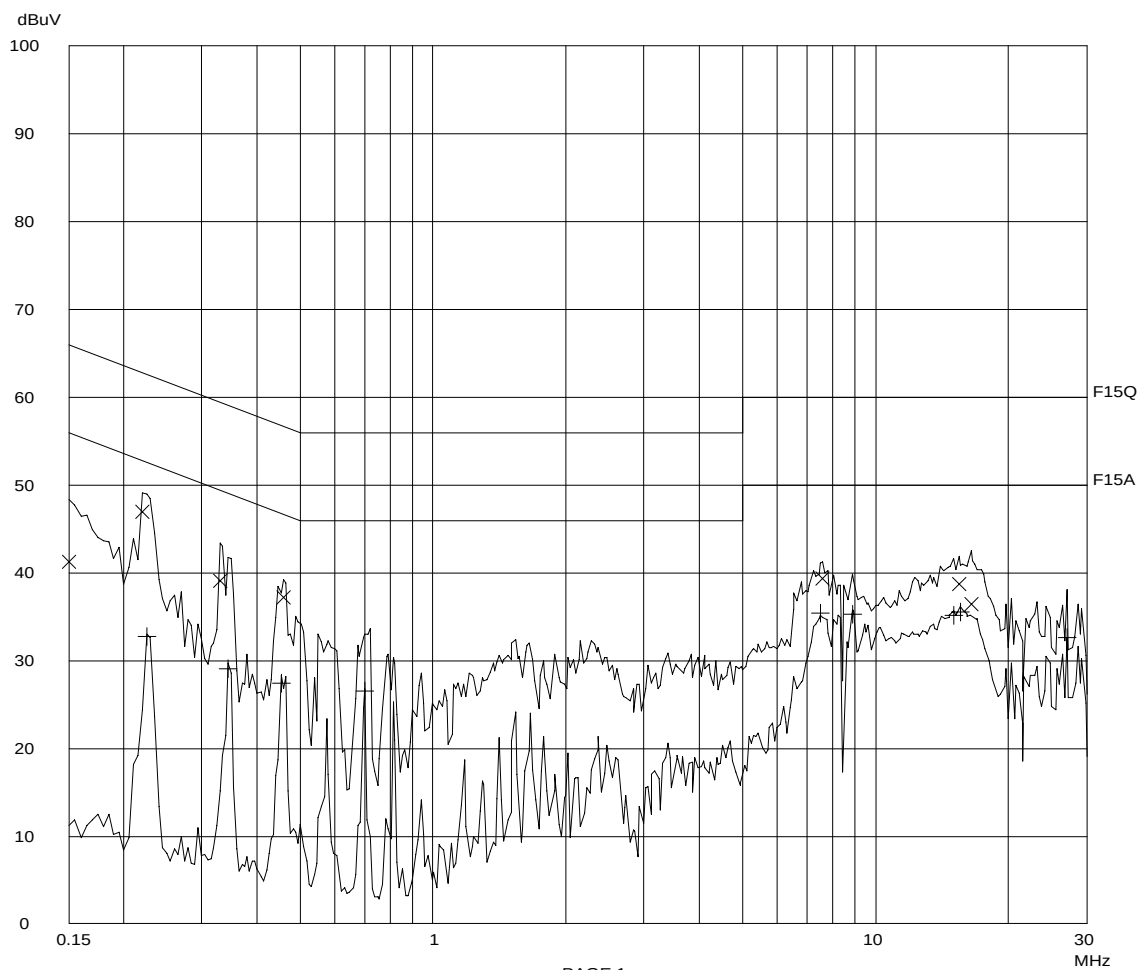

Report No.: 06130911  
VoIP Online Mode  
PC's AC Port

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|  
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge  
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency QP Level QP Limit

MHz dBuV dBuV

|          |      |      |
|----------|------|------|
| 0.15000  | 41.3 | 66.0 |
| 0.22000  | 46.9 | 62.9 |
| 0.33000  | 39.1 | 59.5 |
| 0.46000  | 37.2 | 56.7 |
| 7.57500  | 39.3 | 60.0 |
| 15.46000 | 38.6 | 60.0 |
| 16.44000 | 36.4 | 60.0 |

Frequency AV Level AV Limit

MHz dBuV dBuV

|          |      |      |
|----------|------|------|
| 0.22500  | 32.8 | 52.7 |
| 0.34500  | 29.0 | 49.1 |
| 0.45500  | 27.4 | 46.8 |
| 0.70000  | 26.6 | 46.0 |
| 7.51500  | 35.3 | 50.0 |
| 8.86000  | 35.3 | 50.0 |
| 15.03000 | 35.2 | 50.0 |
| 15.52000 | 35.5 | 50.0 |
| 27.16000 | 32.6 | 50.0 |

\* limit