



ONE WORLD ◊ OUR APPROVAL

Test report

237212-5TRFWL

Date of issue: May 23, 2013

Applicant:

Ericsson WiFi Inc.

Product:

Dual-band WIFI router

Model:

AP6120

FCC ID:

RAR-40015001

IC Registration number:

4674A-40015001

Specifications:

- ◆ **FCC 47 CFR Part 15 Subpart E, §15.407**
Unlicensed National Information Infrastructure Devices
- ◆ **RSS-210, Issue 8, December 2010, Annex 9**
Local Area Network Devices

www.nemko.com

Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada. The tests included in this report are within the scope of this accreditation

FCC 15.407 and RSS-210 A9.docx; Date: May 2013



Test location

Nemko Canada Inc.
303 River Road
Ottawa, ON, K1V 1H2
Canada
FCC test site registration number: 176392 and IC registered site number: 2040A-4 (3 m semi anechoic chamber)

Telephone +1 613 737 9680
Facsimile +1 613 737 9691
Toll free +1 800 563 6336
Website www.nemko.com

Tested by Andrey Adelberg, Senior Wireless/EMC Specialist

Reviewed by



May 23, 2013

Kevin Rose, Wireless/EMC Specialist

Date

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of contents

Table of contents	3
Section 1. Report summary	4
1.1 Applicant and manufacturer	4
1.2 Test specifications	4
1.3 Test methods.....	4
1.4 Statement of compliance	4
1.5 Exclusions.....	4
1.6 Test report revision history	4
Section 2. Summary of test results.....	5
2.1 FCC Part 15 Subpart C, general requirements test results.....	5
2.2 FCC Part 15 Subpart E, test results	5
2.3 RSS-Gen, Issue 3, test results.....	5
2.4 IC RSS-210, Issue 8, test results	6
Section 3. Equipment under test (EUT) details	7
3.1 Sample information.....	7
3.2 EUT information	7
3.3 Technical information	7
3.4 Product description and theory of operation	7
3.5 EUT exercise details.....	7
3.6 EUT setup diagram	7
3.7 EUT sub assemblies	8
Section 4. Engineering considerations.....	9
4.1 Modifications incorporated in the EUT.....	9
4.2 Technical judgment	9
4.3 Deviations from laboratory tests procedures	9
Section 5. Test conditions.....	10
5.1 Atmospheric conditions	10
5.2 Power supply range	10
Section 6. Measurement uncertainty.....	11
6.1 Uncertainty of measurement	11
Section 7. Test equipment	12
7.1 Test equipment list.....	12
Section 8. Testing data	13
8.1 FCC 15.207(a) and RSS-Gen 7.2.4 AC power line conducted emissions limits	13
8.2 FCC 15.403(i) Emission bandwidth	16
8.3 RSS-Gen 4.6.1 Occupied bandwidth	18
8.4 FCC 15.407(a)(2) and RSS-210 A9.2(3) 5.47–5.725 GHz band output power, EIRP and spectral density limits	20
8.5 FCC 15.407(b) and RSS-210 A9.2(3) Spurious (out-of-band) emissions	24
8.6 FCC 15.407(g) Frequency stability	33
8.7 FCC 15.407(a)(6) and RSS-210 A9.4(2) Peak excursion and PSD-to-average ratio	34
Section 9. Block diagrams of test set-ups	37
9.1 Radiated emissions set-up.....	37
9.2 Conducted emissions set-up	37

Section 1. Report summary

1.1 Applicant and manufacturer

Ericsson WiFi Inc.
6300 Legacy Drive,
Plano, TX 75024
USA

1.2 Test specifications

FCC 47 CFR Part 15, Subpart E, Clause 15.407 Unlicensed National Information Infrastructure Devices
RSS-210, Issue 8 Annex 9 Local Area Network Devices

1.3 Test methods

Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E 789033 D01 General UNII Test Procedures v01r02 (September 26, 2012)
Emissions testing of transmitters with multiple outputs in the same band (MIMO) 662911 D01 Multiple Transmitter Output v01r02 (September 26, 2012)

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

1.5 Exclusions

None

1.6 Test report revision history

Revision #	Details of changes made to test report
TRF	Original report issued

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

Part	Test description	Verdict
§15.207(a)	Conducted limits	Pass
§15.31(e)	Variation of power source	Pass ¹
§15.203	Antenna requirement	Pass ²

Notes: ¹Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed

²The Antennas are located within the enclosure of EUT and not user accessible.

2.2 FCC Part 15 Subpart E, test results

Part	Test description	Verdict
§15.403(i)	Emission bandwidth	Not applicable
§15.407(a)(1)	5.15–5.25 GHz band power and density limits ¹	Not applicable
§15.407(a)(2)	5.25–5.35 GHz and 5.47–5.725 GHz bands power and density limits	Pass
§15.407(a)(3)	5.725–5.825 GHz band power and density limits	Not applicable
§15.407(a)(6)	Peak excursion	Not applicable
§15.407(b)(1)	5.15–5.25 GHz band undesired emission limits	Not applicable
§15.407(b)(2)	5.25–5.35 GHz band undesired emission limits	Pass
§15.407(b)(3)	5.47–5.725 GHz band undesired emission limits	Not applicable
§15.407(b)(4)	5.725–5.825 GHz band undesired emission limits	Not applicable
§15.407(b)(6)	Unwanted emissions below 1 GHz	Pass
§15.407(b)(7)	Radiated emissions within restricted bands	Pass
§15.407(e)	5.15–5.25 GHz band operational restriction	Not applicable
§15.407(g)	Frequency stability	Pass
§15.407(h)(1)	Transmit power control (TPC)	Pass
§15.407(h)(2)	Dynamic Frequency Selection (DFS) ¹	Not tested

Note: ¹DFS measurements were not tested at Nemko Canada lab. It's up to manufacturer to provide the results for the DFS requirements.

2.3 RSS-Gen, Issue 3, test results

Part	Test description	Verdict
4.6.1	Occupied bandwidth	Pass
4.7	Transmitter frequency stability	Pass
6.1	Receiver spurious emissions limits (radiated)	Not applicable
6.2	Receiver spurious emissions limits (antenna conducted)	Not applicable
7.2.4	AC power lines conducted emission limits	Pass

Notes: ¹According to Notice 2012-DRS0126 (from January 2012) section 2.2 of RSS-Gen, Issue 3 has been revised. The EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

2.4 IC RSS-210, Issue 8, test results

Part	Test description	Verdict
A9.2	Transmitter power and e.i.r.p. limits	
A9.2 (1)	5150–5250 MHz band	Not applicable
A9.2 (2)	5250–5350 MHz and 5470–5725 MHz bands	Pass
A9.2 (3)	5725–5825 MHz band	Not applicable
A9.3	Out-of-band emission limits	
A9.3 (1)	5150–5250 MHz band	Not applicable
A9.3 (2)	5250–5350 MHz band	Not applicable
A9.3 (3)	5470–5725 MHz band	Pass
A9.3 (4)	5725–5825 MHz band	Not applicable
A9.4	Dynamic Frequency Selection (DFS) for devices operating in the 5250–5350 MHz and 5470–5725 MHz bands	Not tested ¹
A9.5	Other Requirements for all bands	
A9.5 (a)	Digital modulation	Pass
A9.5 (b)	PSD to average power ratio	Pass
A9.5 (c)	Test frequencies	Pass
A9.5 (d)	Discontinuation of transmission	Not applicable
A9.5 (e)	Transmitter frequency stability	Pass
A9.5 (f)	Mobile satellite services	Not applicable

Notes: ¹DFS measurements were not tested at Nemko Canada lab. It's up to manufacturer to provide the results of the DFS requirements.

Section 3. Equipment under test (EUT) details

3.1 Sample information

Receipt date October 10, 2012
Nemko sample ID number 1

3.2 EUT information

Product name Dual band WIFI router
Model AP6120
Serial number BA114300032

3.3 Technical information

Operating band 5470–5725 MHz
Operating frequency FCC 5500–5700 MHz (20 MHz channel) and 5520–5680 MHz (40 MHz channel)
Operating frequency IC 5500–5580 MHz and 5680–5700 MHz (20 MHz channel) and 5520–5540 MHz and 5680 MHz (40 MHz channel)
Modulation type 802.11a/n
Occupied bandwidth (99 %) 16.63 MHz (802.11a);
17.79 MHz (802.11n HT20); 37.10 MHz (802.11n HT40)
Emission designator W7D
Power requirements 48 V_{DC}
Antenna information 2 internal 4 dBi antennas
The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator.

3.4 Product description and theory of operation

The EUT is a 2x2 MIMO device designed to operate in the 2.4 GHz band, and 5 GHz ISM and UNII bands.
There are two independent radio units. This report covers only the 5.6 GHz UNII band radio.

3.5 EUT exercise details

The EUT was controlled to transmit at desired frequency and modulation from laptop using Art GUI software and telnet session.

3.6 EUT setup diagram

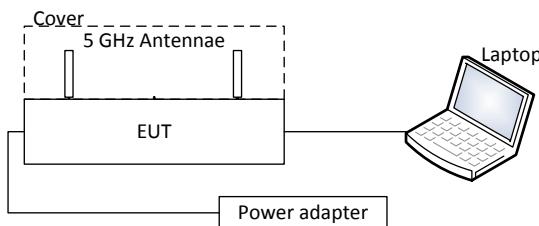


Diagram 3.6-1: Setup diagram

3.7 EUT sub assemblies

Table 3.7-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number
Laptop	Toshiba	Satellite	Asset number: 441
I.T.E. Power Supply	Leader Electronics Inc.	MU24-B480050-A1	None

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

None

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

Temperature 15–30 °C

Relative humidity 20–75 %

Air pressure 860–1060 mbar

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

Nemko Canada Inc. has calculated measurement uncertainty and is documented in EMC/MUC/001 "Uncertainty in EMC measurements." Measurement uncertainty was calculated using the methods described in CISPR 16-4 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC measurements; as well as described in UKAS LAB34: The expression of Uncertainty in EMC Testing. Measurement uncertainty calculations assume a coverage factor of K=2 with 95% certainty.

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber	TDK	SAC-3	FA002047	1 year	Mar. 09/13
Flush mount turntable	Sunol	FM2022	FA002082	—	NCR
Controller	Sunol	SC104V	FA002060	—	NCR
Antenna mast	Sunol	TLT2	FA002061	—	NCR
Power supply	California Inst.	3001I	FA001021	1 year	Feb 08/13
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 26	FA002043	1 year	May 16/13
Spectrum analyzer	Rohde & Schwarz	FSU	FA001877	1 year	Jan. 10/13
Bilog antenna	Sunol	JB3	FA002108	1 year	Feb. 07/13
Horn antenna #2	EMCO	3115	FA000825	1 year	Feb. 24/13
Horn antenna 18–26.5 GHz	Electro-metrics	SH-50/60-1	FA000479	—	VOU
1–18 GHz pre-amplifier	JCA	JCA118-503	FA002091	1 year	July 03/13
18–26 GHz pre-amplifier	Narda	BBS-1826N612	FA001550	—	VOU
LISN	Rohde & Schwarz	ENV216	FA002023	1 year	Nov. 18/12
Power meter	Agilent	N1911A	FA001946	1 year	Feb. 13/13
Power sensor	Agilent	N1922A	FA001947	1 year	Feb. 13/13
Temperature chamber	Thermotron	SM-16C	FA001030	1 year	NCR
26–40 GHz pre-amplifier	Narda	DBL-2640N610	FA001556	—	VOU
Horn antenna 18–40 GHz	EMCO	3116	FA001847	1 year	Sept. 06/13

Note: NCR - no calibration required, VOU - verify on use

Section 8. Testing data

8.1 FCC 15.207(a) and RSS-Gen 7.2.4 AC power line conducted emissions limits

8.1.1 Definitions and limits

FCC:

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

IC:

The purpose of this test is to measure unwanted radio frequency currents induced in any AC conductor external to the equipment which could conduct interference to other equipment via the AC electrical network.

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

The conducted emissions shall be measured with a 50 Ω /50 μ H line impedance stabilization network (LISN).

Table 8.1-1: Conducted emissions limit

Frequency of emission (MHz)	Quasi-peak	Conducted limit (dB μ V)	Average
0.15–0.5	66 to 56*	56 to 46*	56 to 46*
0.5–5	56	46	46
5–30	60	50	50

Note: * - Decreases with the logarithm of the frequency.

8.1.2 Test summary

Test date	October 15, 2012	Test engineer	Andrey Adelberg	Verdict	Pass
Temperature	23 °C	Air pressure	1006 mbar	Relative humidity	32 %

8.1.3 Observations/special notes

The EUT was set up as tabletop configuration.


The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance.

A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.

Receiver settings for preview measurements: Peak and Average detector (Max hold), RBW = 9 kHz, VBW = 30 kHz, Measurement time = 100 ms


Receiver settings for final measurements: Q-Peak and Average detector, RBW = 9 kHz, VBW = 30 kHz, Measurement time = 100 ms

8.1.4 Test data

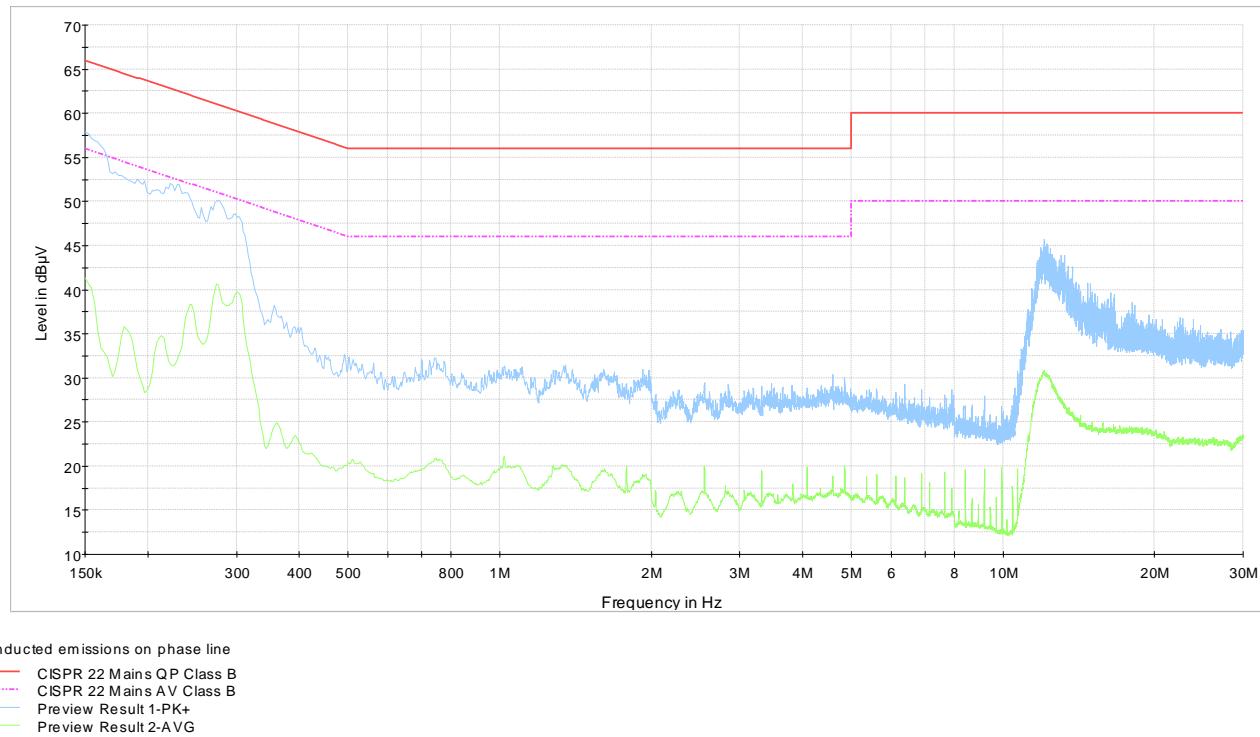

Plot 8.1-1: Conducted emissions on phase line

8.1.4 Test data, continued

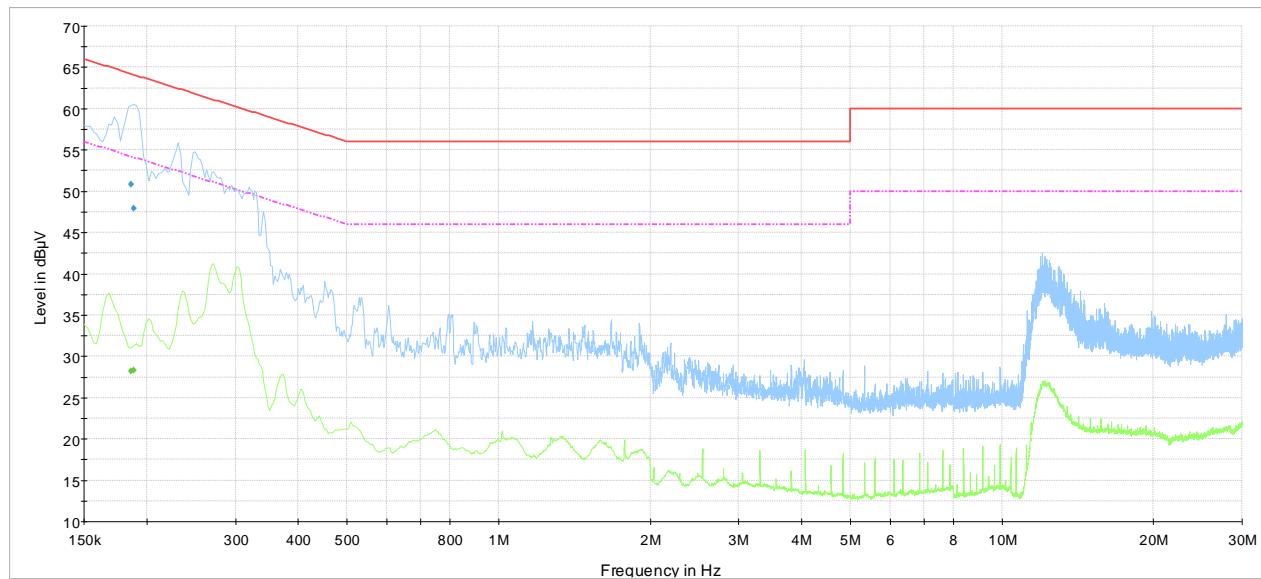

Conducted emissions on neutral line

- CISPR 22 Mains QP Class B
- .-. CISPR 22 Mains AV Class B
- Preview Result 1-PK+
- Preview Result 2-AVG
- Final Result 1-QPK
- Final Result 2-AVG

Plot 8.1-2: Conducted emissions on neutral line

Table 8.1-2: Quasi-Peak conducted emissions results

Frequency, MHz	Q-Peak result, dB μ V	Meas. Time, ms	Bandwidth, kHz	Filter	Conductor	Correction, dB	Margin, dB	Limit, dB μ V
0.186000	50.8	100.0	9.000	On	N	10.2	13.4	64.2
0.188250	47.9	100.0	9.000	On	N	10.2	16.2	64.1

Note: $43.5 \text{ dB}\mu\text{V} = 23.2 \text{ dB}\mu\text{V} (\text{receiver reading}) + 10.1 \text{ dB} (\text{LISN factor IL}) + 0.2 \text{ dB} (\text{cable loss}) + 10 \text{ dB} (\text{attenuator})$

Table 8.1-3: Average conducted emissions results

Frequency, MHz	Average result, dB μ V	Meas. Time, ms	Bandwidth, kHz	Filter	Conductor	Correction, dB	Margin, dB	Limit, dB μ V
0.186000	28.2	100.0	9.000	On	N	10.2	26.1	54.2
0.188250	28.3	100.0	9.000	On	N	10.2	25.8	54.1

Sample calculation:

Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB)

Result (dB μ V) = XX dB μ V (reading from receiver) + XX dB (Correction factor)

Example:

$43.5 \text{ dB}\mu\text{V} = 23.2 \text{ dB}\mu\text{V} (\text{receiver reading}) + 10.1 \text{ dB} (\text{LISN factor IL}) + 0.2 \text{ dB} (\text{cable loss}) + 10 \text{ dB} (\text{attenuator})$

8.2 FCC 15.403(i) Emission bandwidth

8.2.1 Definitions and limits

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

8.2.2 Test summary

Test date	November 1, 2012	Test engineer	Andrey Adelberg	Verdict	Pass
Temperature	21 °C	Air pressure	1002 mbar	Relative humidity	32 %

8.2.3 Observations/special notes


Measurements were performed with peak detector using RBW = 1 % of the emission BW. VBW was set three times RBW.

8.2.4 Test data

Table 8.2-1: 26 dB bandwidth results


Antenna chain	Modulation	Channel	26 dB bandwidth, MHz
ch0	802.11a	5500	22.98
ch0	802.11a	5580	22.93
ch0	802.11a	5700	23.03
ch0	802.11n HT20	5500	23.08
ch0	802.11n HT20	5580	23.80
ch0	802.11n HT20	5700	23.37
ch0	802.11n HT40	5520	48.27
ch0	802.11n HT40	5680	47.50
ch1	802.11a	5500	23.56
ch1	802.11a	5580	22.98
ch1	802.11a	5700	23.17
ch1	802.11n HT20	5500	24.33
ch1	802.11n HT20	5580	24.28
ch1	802.11n HT20	5700	23.99
ch1	802.11n HT40	5520	48.17
ch1	802.11n HT40	5680	47.40

8.2.4 Test data, continued

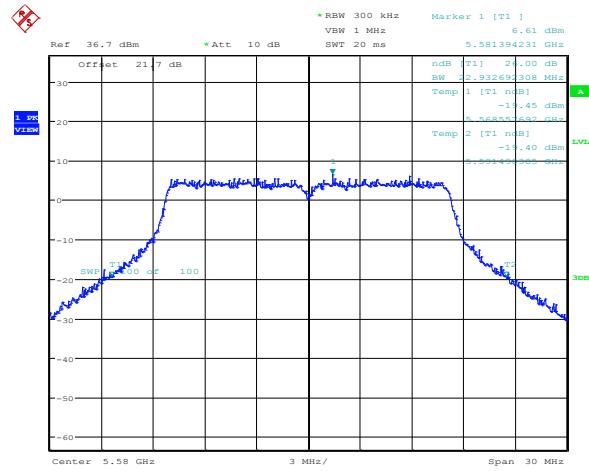


Date: 1.NOV.2012 12:44:35

Diagram 8.2-1: 26 dB bandwidth on 802.11a, sample plot

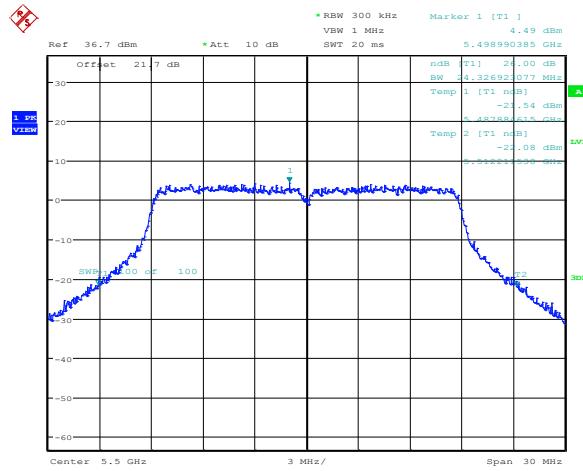

Date: 1.NOV.2012 12:42:24

Diagram 8.2-2: 26 dB bandwidth on 802.11n HT20, sample plot

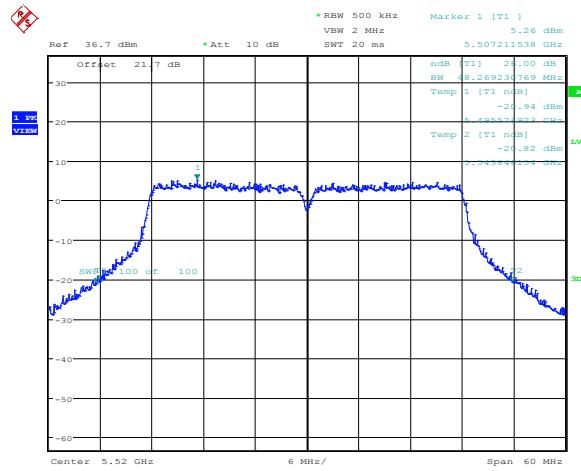

Date: 1.NOV.2012 12:48:24

Diagram 8.2-3: 26 dB bandwidth on 802.11n HT40, sample plot

8.3 RSS-Gen 4.6.1 Occupied bandwidth

8.3.1 Definitions and limits

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99 percent emission bandwidth, as calculated or measured.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

The span between the two recorded frequencies is the occupied bandwidth.

8.3.2 Test summary

Test date	November 1, 2012	Test engineer	Andrey Adelberg	Verdict	Pass
Temperature	21 °C	Air pressure	1002 mbar	Relative humidity	32 %

8.3.3 Observations/special notes


Measurements were performed with peak detector using RBW $\geq 1\%$ of span; VBW was set three times RBW.

8.3.4 Test data

Table 8.3-1: 99 % bandwidth results


Modulation	99 % bandwidth, MHz
802.11a	16.63
802.11n HT20	17.79
802.11n HT40	37.10

8.3.4 Test data, continued

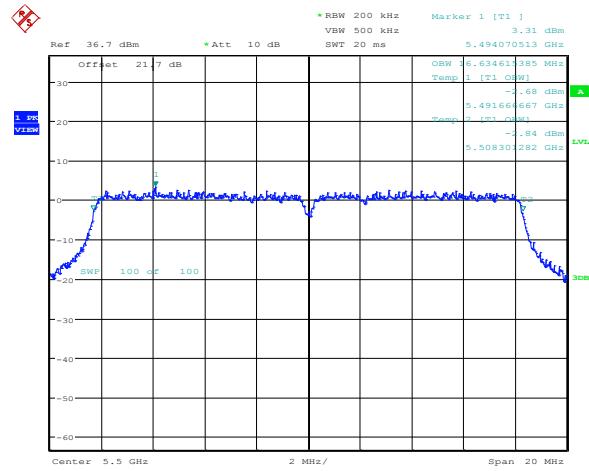


Date: 1.NOV.2012 12:52:28

Diagram 8.3-1: 99 % bandwidth on 802.11a, sample plot

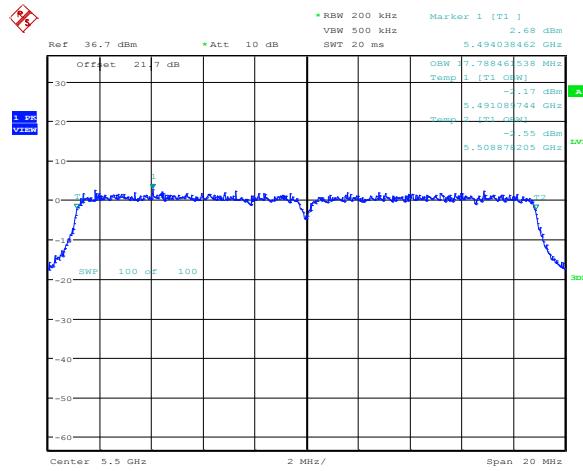

Date: 1.NOV.2012 12:52:51

Diagram 8.3-2: 99 % bandwidth on 802.11n HT20, sample plot

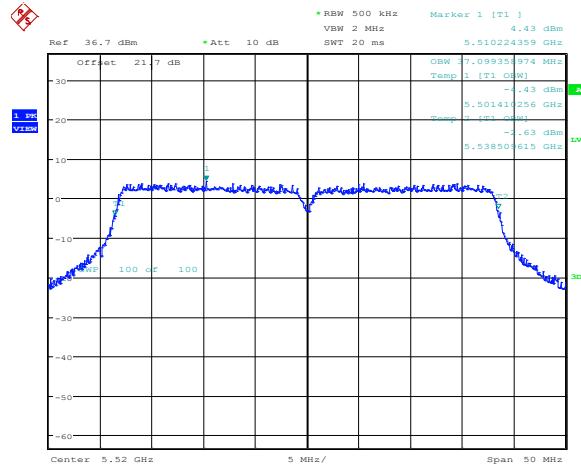

Date: 1.NOV.2012 12:51:33

Diagram 8.3-3: 99 % bandwidth on 802.11n HT40, sample plot

8.4 FCC 15.407(a)(2) and RSS-210 A9.2(3) 5.47–5.725 GHz band output power, EIRP and spectral density limits

8.4.1 Definitions and limits

FCC:

For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log_{10} B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement conforming to the above definitions for the emission in question.

The peak power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A resolution bandwidth less than the measurement bandwidth can be used, provided that the measured power is integrated to show total power over the measurement bandwidth. If the resolution bandwidth is approximately equal to the measurement bandwidth, and much less than the emission bandwidth of the equipment under test, the measured results shall be corrected to account for any difference between the resolution bandwidth of the test instrument and its actual noise bandwidth.

(h)(1) Transmit power control (TPC). U-NII devices operating in the 5.25–5.35 GHz band and the 5.47–5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

IC:

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Note: For the band 5600–5650 MHz, no operation is permitted. Until further notice, devices subject to this annex shall not be capable of transmitting in the band 5600–5650 MHz. This restriction is for the protection of Environment Canada weather radars operating in this band.

8.4.2 Test summary

Test date	November 1, 2012	Test engineer	Andrey Adelberg	Verdict	Pass
Temperature	21 °C	Air pressure	1002 mbar	Relative humidity	32 %

8.4.3 Observations/special notes

The test was performed according to UNII guidelines section C) 4) Method PM: maximum conducted (average) output power using wideband RF average power meter with a thermocouple detector.

8.4.4 Test data

Table 8.4-1: Output power measurements and EIRP calculations results for FCC

Modulation	Frequency, MHz	Average power on ch0, dBm	Average power on ch1, dBm	Combined average power, dBm	Output power limit, dBm	Output power margin, dB	Antenna gain, dBi	EIRP, dBm	EIRP limit, dBm	EIRP margin, dB
802.11n HT20	5500	17.30	16.75	20.04	23.0	2.96	7.0	27.04	30.00	2.96
802.11n HT20	5580	15.95	15.60	18.79	23.0	4.21	7.0	25.79	30.00	4.21
802.11n HT20	5700	14.60	13.50	17.10	23.0	5.90	7.0	24.10	30.00	5.90
802.11n HT40	5520	16.70	15.85	19.31	23.0	3.69	7.0	26.31	30.00	3.69
802.11n HT40	5680	14.20	13.85	17.04	23.0	5.96	7.0	24.04	30.00	5.96
802.11a	5500	17.33	16.75	20.06	23.0	2.94	7.0	27.06	30.00	2.94
802.11a	5580	15.95	15.55	18.76	23.0	4.24	7.0	25.76	30.00	4.24
802.11a	5700	14.60	13.60	17.14	23.0	5.86	7.0	24.14	30.00	5.86

Notes: Combined average output power was calculated as follows:

$$P_{combined} = 10 \times \log_{10} \left((10^{P_{ch0}/10}) + (10^{P_{ch1}/10}) \right)$$

EIRP was calculated as follows:

$$EIRP = P_{combined} + \text{antenna gain}$$

MIMO Correlated 2x2 (CDD/TXBF), Directional gain = 4 dBi + 10×log₁₀ (N) dB = 4 dBi + 3 dB = 7 dBi, where "N" is number of antennae.

Since the direct antenna gain is more than 6 dBi by 1 dB, therefore the output power limit was reduced by 1 dB.

Table 8.4-2: Output power measurements and EIRP calculations results for IC

Modulation	Frequency, MHz	Average power on ch0, dBm	Average power on ch1, dBm	Combined average power, dBm	Output power limit, dBm	Output power margin, dB	Antenna gain, dBi	EIRP, dBm	EIRP limit, dBm	EIRP margin, dB
802.11n HT20	5500	17.30	16.75	20.04	23.50	3.46	7.0	27.04	29.50	2.46
802.11n HT20	5580	15.95	15.60	18.79	23.50	4.71	7.0	25.79	29.50	3.71
802.11n HT20	5700	14.60	13.50	17.10	23.50	6.40	7.0	24.10	29.50	5.40
802.11n HT40	5520	16.70	15.85	19.31	24.00	4.69	7.0	26.31	30.00	3.69
802.11n HT40	5680	14.20	13.85	17.04	24.00	6.96	7.0	24.04	30.00	5.96
802.11a	5500	17.33	16.75	20.06	23.21	3.15	7.0	27.06	29.21	2.15
802.11a	5580	15.95	15.55	18.76	23.21	4.45	7.0	25.76	29.21	3.45
802.11a	5700	14.60	13.60	17.14	23.21	6.07	7.0	24.14	29.21	5.07

Notes: Combined average output power was calculated as follows:

$$P_{combined} = 10 \times \log_{10} \left((10^{P_{ch0}/10}) + (10^{P_{ch1}/10}) \right)$$

EIRP was calculated as follows:

$$EIRP = P_{combined} + \text{antenna gain}$$

MIMO Correlated 2x2 (CDD/TXBF), Directional gain = 4 dBi + 10×log₁₀ (N) dB = 4 dBi + 3 dB = 7 dBi, where "N" is number of antennae.

802.11a output power limit calculation: $11 + 10 \times \log_{10}(16.63) = 23.21$ dBm

802.11n HT20 output power limit calculation: $11 + 10 \times \log_{10}(17.79) = 23.50$ dBm

8.4.4 Test data, continued

Table 8.4-3: PSD measurements results for FCC

Modulation	Frequency, MHz	PSD at ch0, dBm/1 MHz	PSD at ch1, dBm/1 MHz	Combined PSD, dBm/1 MHz	PSD limit, dBm/1 MHz	Margin, dB
802.11n HT20	5500	4.37	3.90	7.15	10.0	2.85
802.11n HT20	5580	3.21	3.22	6.23	10.0	3.77
802.11n HT20	5700	2.61	1.60	5.14	10.0	4.86
802.11n HT40	5520	0.83	0.70	3.78	10.0	6.22
802.11n HT40	5680	-1.56	-1.55	1.46	10.0	8.54
802.11a	5500	4.60	4.31	7.47	10.0	2.53
802.11a	5580	3.55	3.43	6.50	10.0	3.50
802.11a	5700	2.90	1.94	5.46	10.0	4.54

Notes: Combined PSD was calculated as follows:

$$PSD_{combined} = 10 \times \log_{10} \left((10^{PSD_{ch0}/10}) + (10^{PSD_{ch1}/10}) \right)$$

Since the direct antenna gain is more than 6 dBi by 1 dB, therefore the PSD limit was reduced by 1 dB.

Table 8.4-4: PSD measurements results for IC

Modulation	Frequency, MHz	PSD at ch0, dBm/1 MHz	PSD at ch1, dBm/1 MHz	Combined PSD, dBm/1 MHz	PSD limit, dBm/1 MHz	Margin, dB
802.11n HT20	5500	4.37	3.90	7.15	11.0	3.85
802.11n HT20	5580	3.21	3.22	6.23	11.0	4.77
802.11n HT20	5700	2.61	1.60	5.14	11.0	5.86
802.11n HT40	5520	0.83	0.70	3.78	11.0	7.22
802.11n HT40	5680	-1.56	-1.55	1.46	11.0	9.54
802.11a	5500	4.60	4.31	7.47	11.0	3.53
802.11a	5580	3.55	3.43	6.50	11.0	4.50
802.11a	5700	2.90	1.94	5.46	11.0	5.54

Notes: Combined PSD was calculated as follows:

$$PSD_{combined} = 10 \times \log_{10} \left((10^{PSD_{ch0}/10}) + (10^{PSD_{ch1}/10}) \right)$$

Table 8.4-5: TPC measurements results

Modulation	Frequency, MHz	Power at ch0, dBm	Power at ch1, dBm	Combined power, dBm	Antenna gain, dBi	EIRP, dBm	TPC EIRP limit, dBm	Margin, dB
802.11n HT20	5500	12.30	10.65	14.56	7.0	21.56	24.00	2.44
802.11n HT20	5580	10.50	6.55	11.97	7.0	18.97	24.00	5.03
802.11n HT20	5700	9.30	7.60	11.54	7.0	18.54	24.00	5.46
802.11n HT40	5520	11.60	10.15	13.95	7.0	20.95	24.00	3.05
802.11n HT40	5680	8.00	8.00	11.01	7.0	18.01	24.00	5.99
802.11a	5500	12.35	10.65	14.59	7.0	21.59	24.00	2.41
802.11a	5580	10.45	9.60	13.06	7.0	20.06	24.00	3.94
802.11a	5700	9.43	7.55	11.60	7.0	18.60	24.00	5.40

Notes: Combined power was calculated as follows:

$$Power_{combined} = 10 \times \log_{10} \left((10^{Power_{ch0}/10}) + (10^{Power_{ch1}/10}) \right)$$

8.4.4 Test data, continued

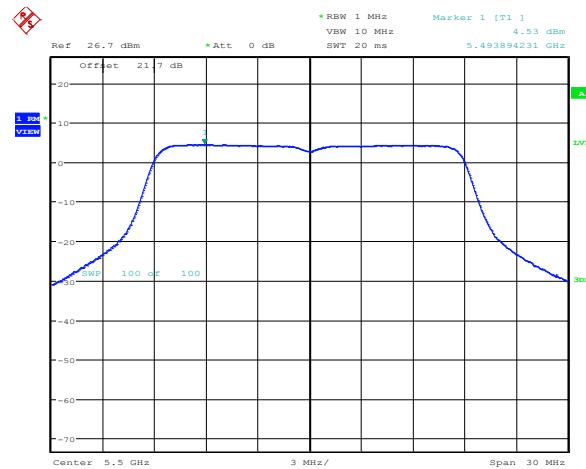
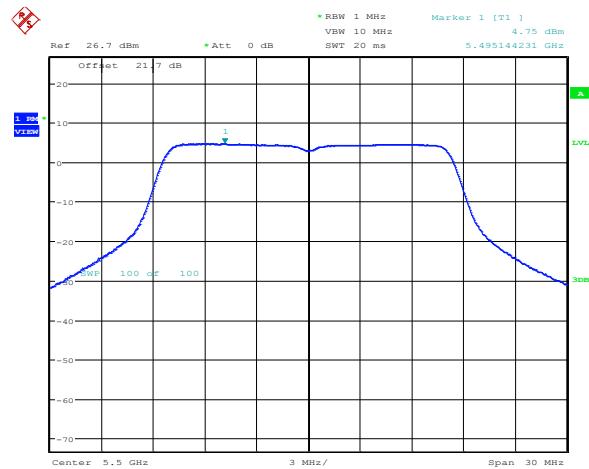


Diagram 8.4-1: Sample plot for PSD on 802.11a

Diagram 8.4-2: Sample plot for PSD on 802.11n HT20

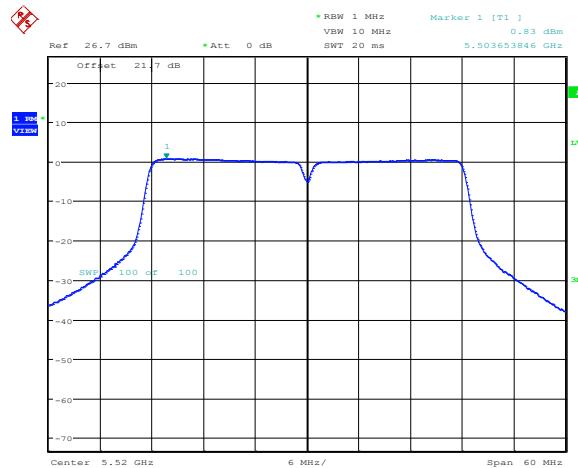


Diagram 8.4-3: Sample plot for PSD on 802.11n HT40

8.5 FCC 15.407(b) and RSS-210 A9.2(3) Spurious (out-of-band) emissions

8.5.1 Definitions and limits

FCC:

- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of –27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.
- (7) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

IC:

Emissions outside the band 5470–5725 MHz shall not exceed –27 dBm/MHz e.i.r.p.

The outermost carrier frequencies or channels, as permitted by the design of the equipment, shall be used when measuring unwanted emissions. Such carrier or channel center frequencies are to be indicated in the test report.

RSS-Gen 7.2.2 Emissions falling within restricted frequency bands

Restricted bands, identified in below, are designated primarily for safety-of-life services (distress calling and certain aeronautical bands), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following restrictions apply:

- (a) fundamental components of modulation of licence-exempt radio apparatus shall not fall within the restricted bands of below;
- (b) unwanted emissions falling into restricted bands of below shall comply with the limits specified in RSS-Gen;
- (c) unwanted emissions not falling within restricted frequency bands shall either comply with the limits specified in the applicable RSS, or with those specified in RSS-Gen.

Table 8.5-1: FCC §15.209 and RSS-Gen – Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	µV/m	dBµV/m	
0.009–0.490*	2400/F	67.6 – 20 × log ₁₀ (F)	300
0.490–1.705*	24000/F	87.6 – 20 × log ₁₀ (F)	30
1.705–30.0*	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: Applicable only to FCC requirements

In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

8.5.1 Definitions and limits, continued

Table 8.5-2: IC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	12.51975–12.52025	399.9–410	5.35–5.46
2.1735–2.1905	12.57675–12.57725	608–614	7.25–7.75
3.020–3.026	13.36–13.41	960–1427	8.025–8.5
4.125–4.128	16.42–16.423	1435–1626.5	9.0–9.2
4.17725–4.17775	16.69475–16.69525	1645.5–1646.5	9.3–9.5
4.20725–4.20775	16.80425–16.80475	1660–1710	10.6–12.7
5.677–5.683	25.5–25.67	1718.8–1722.2	13.25–13.4
6.215–6.218	37.5–38.25	2200–2300	14.47–14.5
6.26775–6.26825	73–74.6	2310–2390	15.35–16.2
6.31175–6.31225	74.8–75.2	2655–2900	17.7–21.4
8.291–8.294	108–138	3260–3267	22.01–23.12
8.362–8.366	156.52475–156.52525	3332–3339	23.6–24.0
8.37625–8.38675	156.7–156.9	3345.8–3358	31.2–31.8
8.41425–8.41475	240–285	3500–4400	36.43–36.5
12.29–12.293	322–335.4	4500–5150	Above 38.6

Note: Certain frequency bands listed in Table 8.5-2 and above 38.6 GHz are designated for low-power license-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

Table 8.5-3: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.5.2 Test summary

Test date	November 1, 2012	Test engineer	Andrey Adelberg	Verdict	Pass
Temperature	21 °C	Air pressure	1002 mbar	Relative humidity	32 %

8.5.3 Observations/special notes

The spectrum was searched from 30 MHz to the 10th harmonic.

Radiated measurements were performed at a distance of 3 m, the EUT was transmitting on both MIMO chains simultaneously.

Settings for radiated measurements within restricted bands:

For frequencies below 1 GHz, RBW was set to 100 kHz, VBW was 3 times wider than RBW.

Peak detector was used for measurements.

For frequencies above 1 GHz, RBW was set to 1 MHz, VBW was 3 times wider than RBW for peak measurements, and VBW was set to 10 Hz for average measurements. Peak detector was used for measurements.

EUT was set to transmit with 100 % duty cycle.

Conducted emissions were performed on each individual MIMO chain and plots were adjusted to include 3 dB ($10 \times \log(\text{total number of chains})$) and antenna directional gain of 7 dBi (4 dBi + $10 \times \log(\text{total number of antennas})$).

8.5.4 Test data

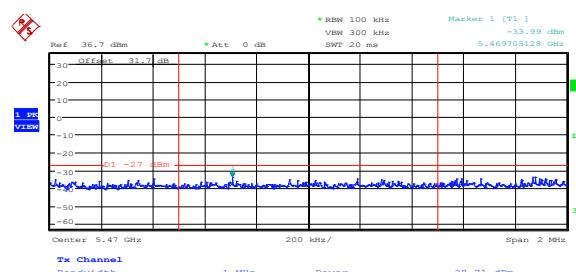


Diagram 8.5-1: Lower band edge, 802.11a, ch0

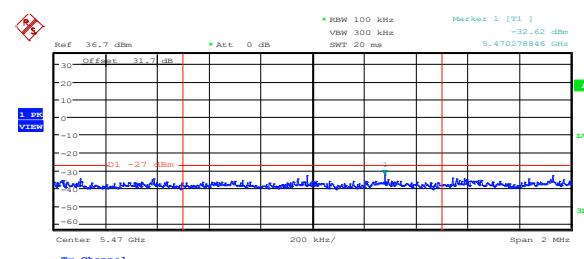


Diagram 8.5-2: Lower band edge, 802.11a, ch1

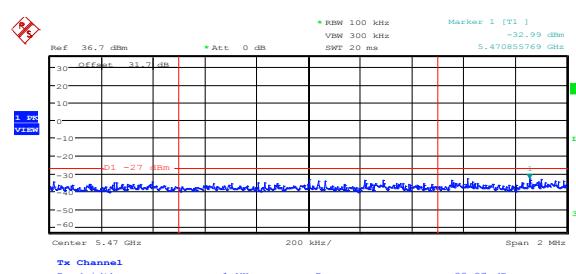


Diagram 8.5-3: Lower band edge, 802.11n HT20, ch0

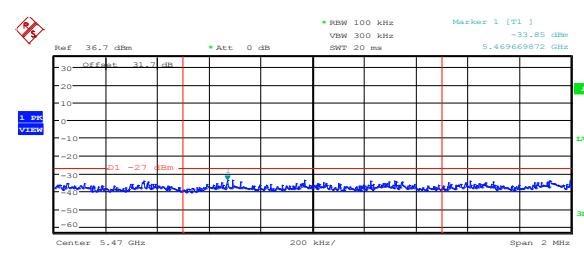


Diagram 8.5-4: Lower band edge, 802.11n HT20, ch1

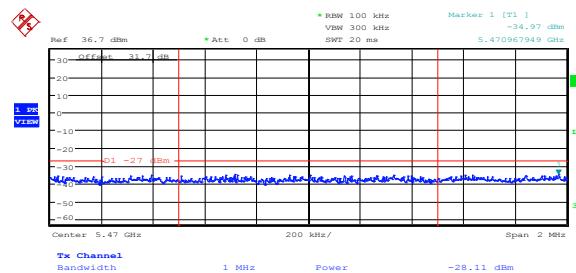


Diagram 8.5-5: Lower band edge, 802.11n HT40, ch0

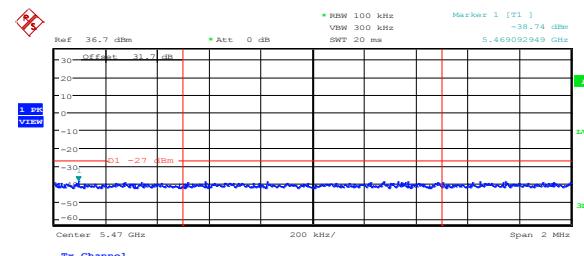


Diagram 8.5-6: Lower band edge, 802.11n HT40, ch1

8.5.4 Test data, continued

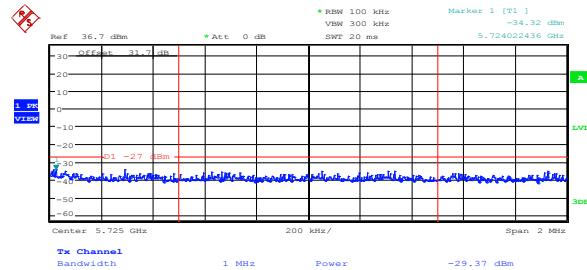


Diagram 8.5-7: Upper band edge, 802.11a, cho

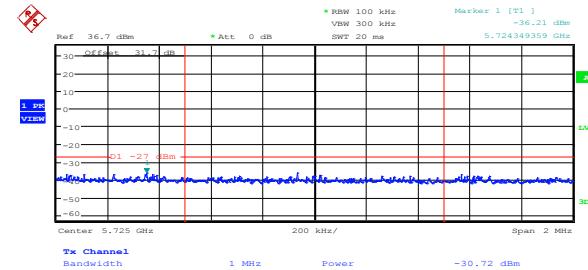


Diagram 8.5-8: Upper band edge, 802.11a, ch1

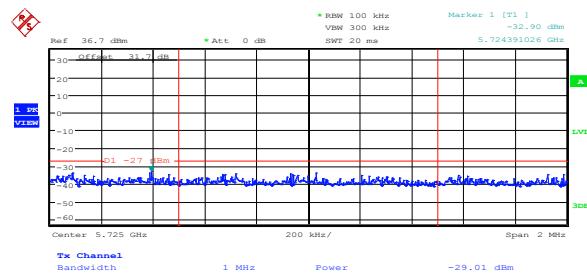


Diagram 8.5-9: Upper band edge, 802.11n HT20, cho

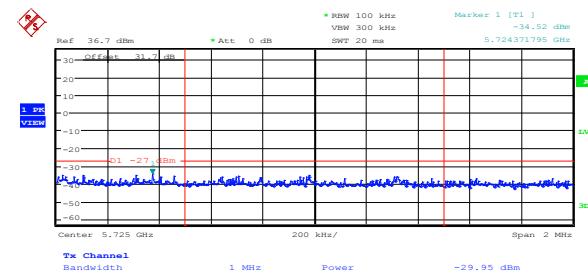


Diagram 8.5-10: Upper band edge, 802.11n HT20, ch1

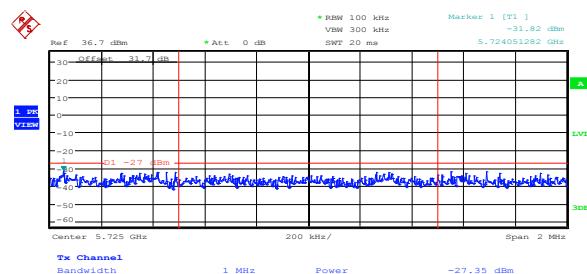


Diagram 8.5-11: Upper band edge, 802.11n HT40, cho

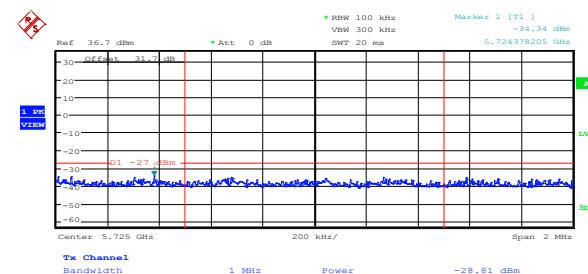


Diagram 8.5-12: Upper band edge, 802.11n HT40, ch1

8.5.4 Test data, continued

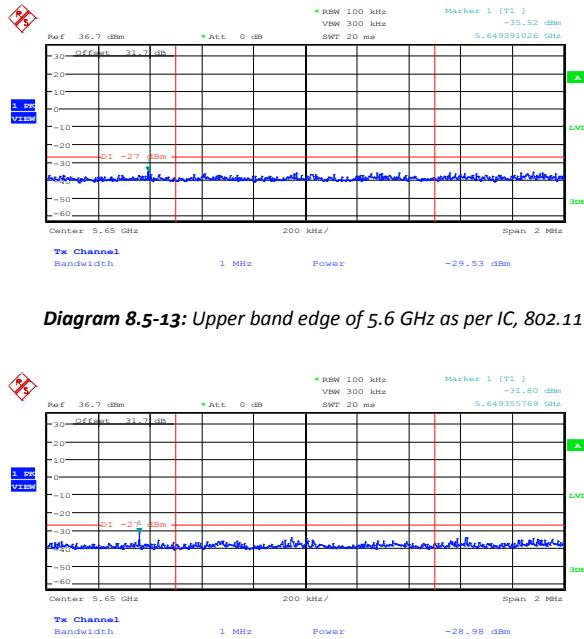


Diagram 8.5-13: Upper band edge of 5.6 GHz as per IC, 802.11a, ch0

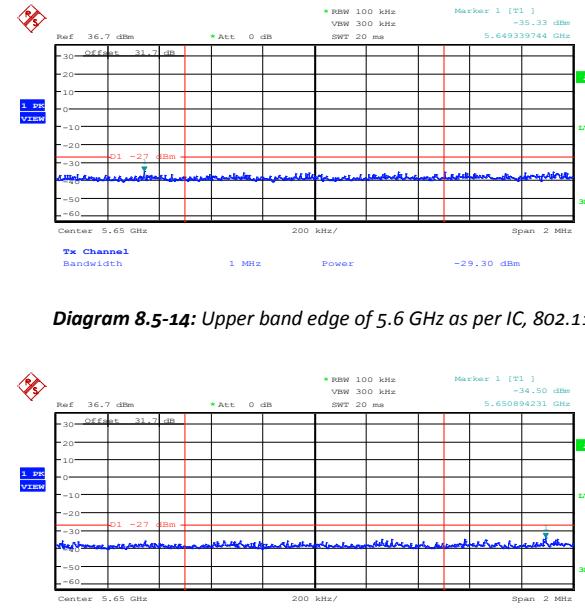


Diagram 8.5-14: Upper band edge of 5.6 GHz as per IC, 802.11a, ch1

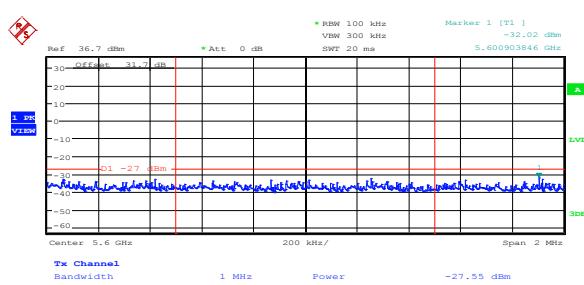


Diagram 8.5-17: Upper band edge of 5.6 GHz as per IC, 802.11n HT40, cho

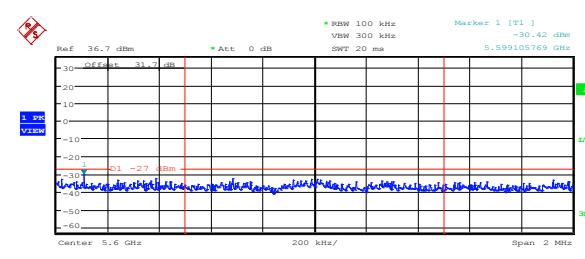


Diagram 8.5-18: Upper band edge of 5.6 GHz as per IC, 802.11n HT40, ch1

8.5.4 Test data, continued

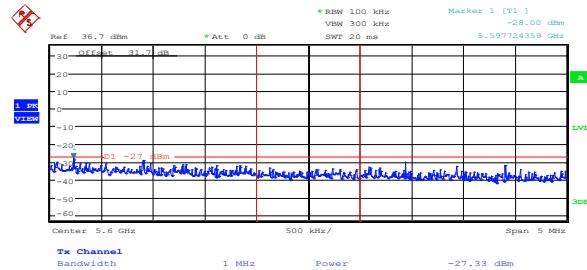


Diagram 8.5-19: Lower band edge of 5.65 GHz as per IC, 802.11a, ch0

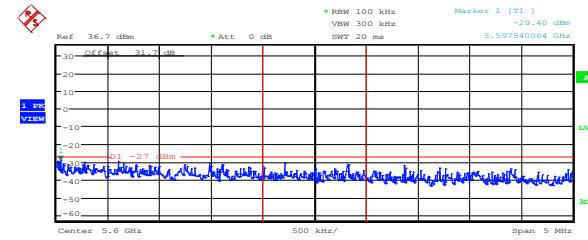


Diagram 8.5-20: Lower band edge of 5.65 GHz as per IC, 802.11a, ch1

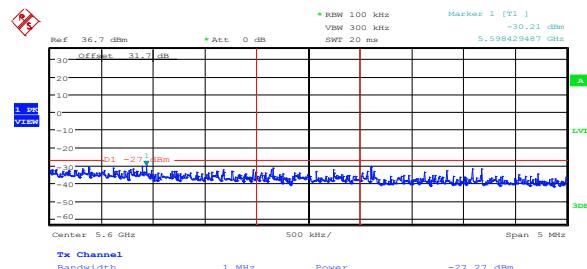


Diagram 8.5-21: Lower band edge of 5.65 GHz as per IC, 802.11n HT20, ch0

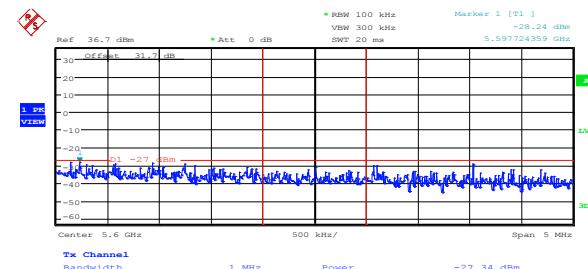


Diagram 8.5-22: Lower band edge of 5.65 GHz as per IC, 802.11n HT20, ch1

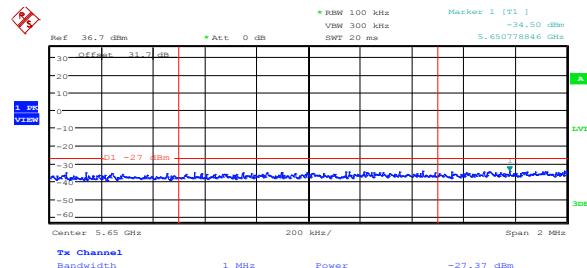


Diagram 8.5-23: Lower band edge of 5.65 GHz as per IC, 802.11n HT40, ch0

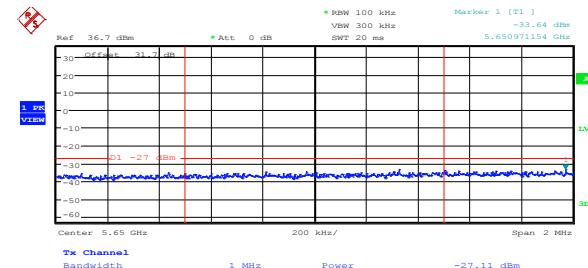



Diagram 8.5-24: Lower band edge of 5.65 GHz as per IC, 802.11n HT40, ch1

Table 8.5-4: Radiated field strength measurement results

Modulation	Channel	Frequency, MHz	Peak Field strength, dB μ V/m	Peak limit, dB μ V/m	Margin, dB	Average Field strength, dB μ V/m	Average limit, dB μ V/m	Margin, dB
802.11a	Low	5440	65.17	74.00	8.83	51.03	54.00	2.97
802.11n HT20	Low	5440	64.29	75.00	10.71	52.12	54.00	1.88
802.11n HT40	Mid	5440	64.99	76.00	11.01	52.37	54.00	1.63


Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

8.5.4 Test data, continued

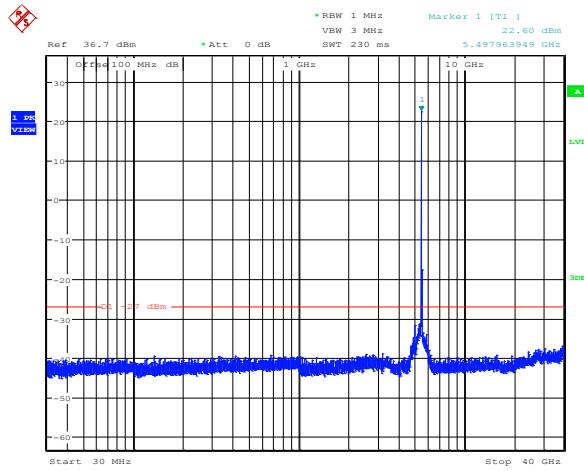


Date: 1.NOV.2012 13:38:14

Diagram 8.5-25: Conducted spurious emissions for 802.11a, ch0, low channel

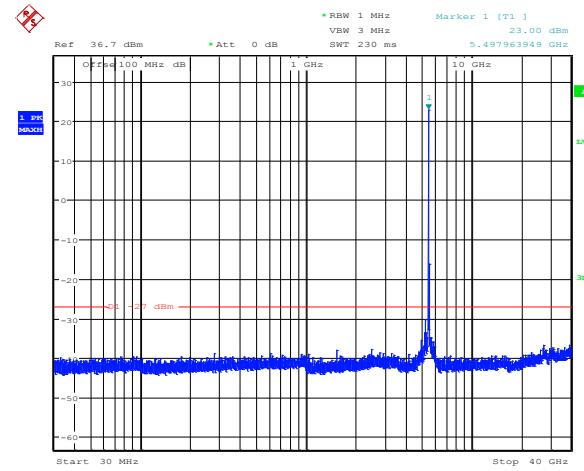


Date: 1.NOV.2012 13:41:58

Diagram 8.5-26: Conducted spurious emissions for 802.11a, ch1, low channel

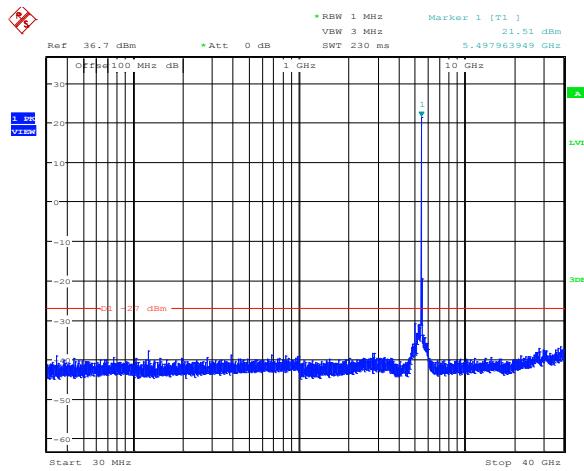

Date: 1.NOV.2012 13:37:56


Diagram 8.5-27: Conducted spurious emissions for 802.11n HT20, ch0, low channel

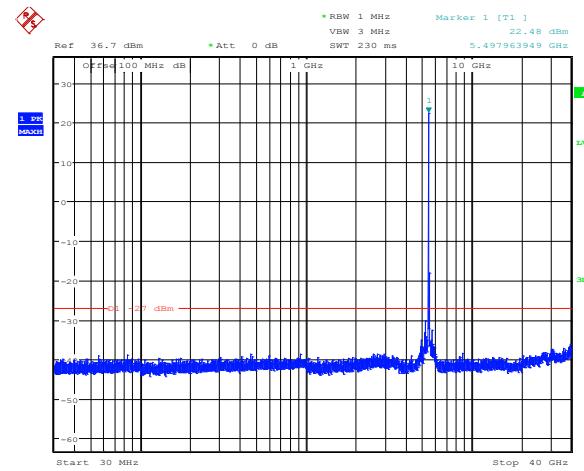

Date: 1.NOV.2012 13:41:39


Diagram 8.5-28: Conducted spurious emissions for 802.11n HT20, ch1, low channel

8.5.4 Test data, continued

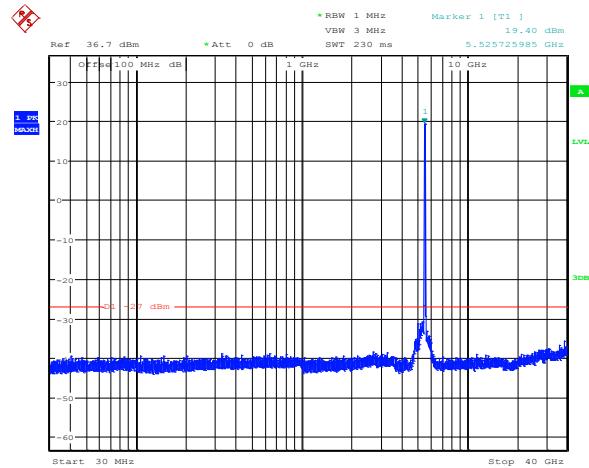


Date: 1.NOV.2012 13:36:40

Diagram 8.5-29: Conducted spurious emissions for 802.11n HT40, ch0, low channel

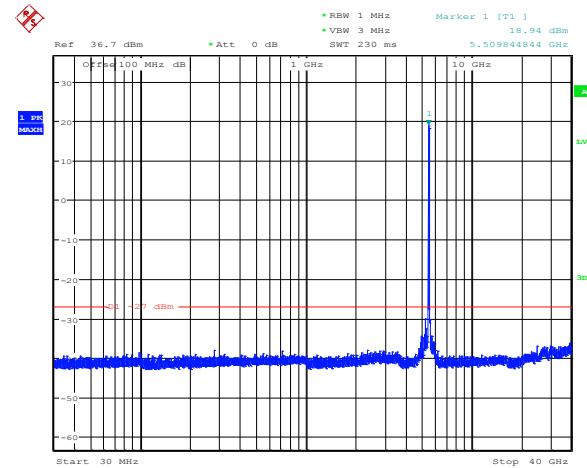


Date: 7.NOV.2012 15:11:34

Diagram 8.5-30: Conducted spurious emissions for 802.11n HT40, ch1, low channel

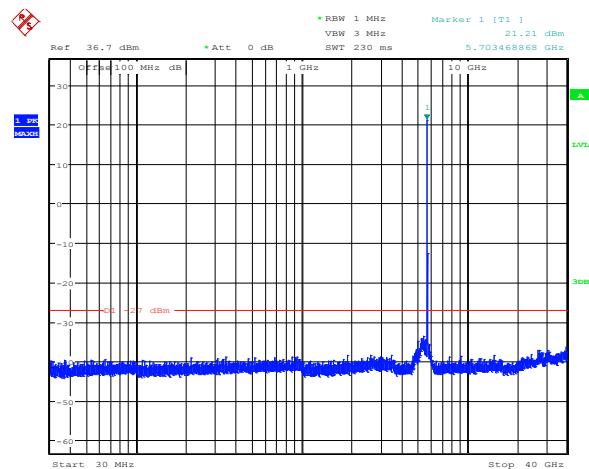

Date: 1.NOV.2012 13:39:51


Diagram 8.5-31: Conducted spurious emissions for 802.11a, ch0, high channel

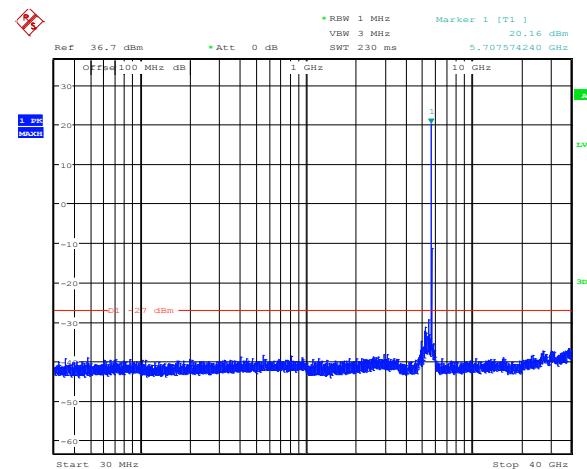

Date: 1.NOV.2012 13:40:49


Diagram 8.5-32: Conducted spurious emissions for 802.11a, ch1, high channel

8.5.4 Test data, continued

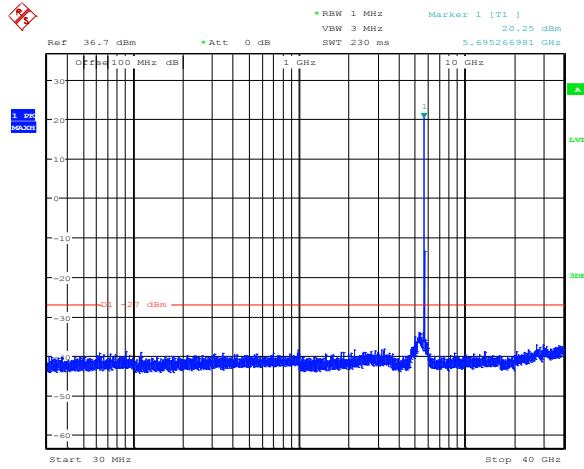


Date: 1.NOV.2012 13:39:31

Diagram 8.5-33: Conducted spurious emissions for 802.11n HT20, cho, high channel

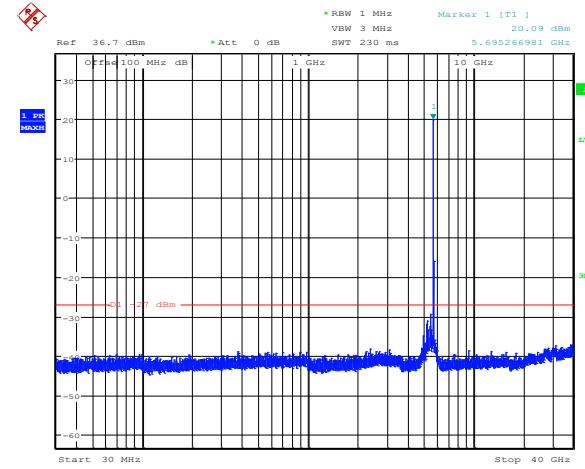


Date: 1.NOV.2012 13:41:07

Diagram 8.5-34: Conducted spurious emissions for 802.11n HT20, ch1, high channel

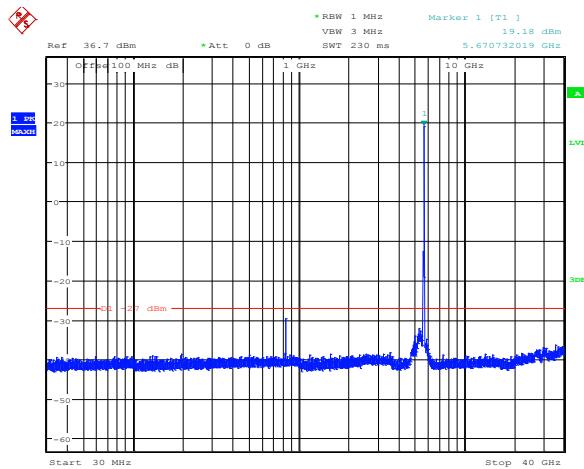

Date: 1.NOV.2012 13:36:09

Diagram 8.5-35: Conducted spurious emissions for 802.11n HT40, cho, high channel

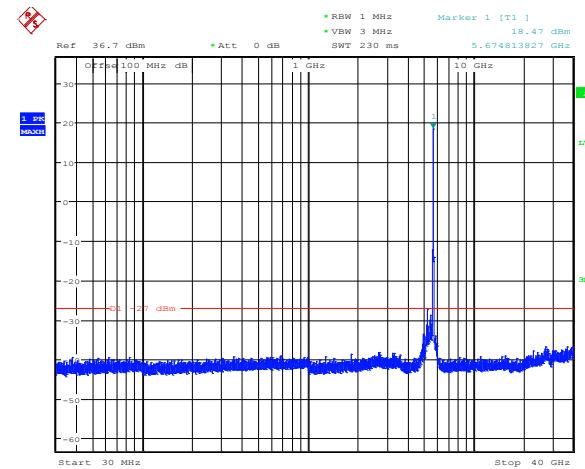

Date: 7.NOV.2012 15:12:11

Diagram 8.5-36: Conducted spurious emissions for 802.11n HT40, ch1, high channel

8.6 FCC 15.407(g) Frequency stability

8.6.1 Definitions and limits

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

8.6.2 Test summary

Test date	October 11, 2012	Test engineer	Andrey Adelberg	Verdict	Pass
Temperature	23 °C	Air pressure	1004 mbar	Relative humidity	33 %

8.6.3 Observations/special notes

None

8.6.4 Test data

Table 8.6-1: Frequency drift measurement

Test conditions	Frequency, GHz	Drift, Hz
+50 °C, Nominal	5.499982212	-160
+40 °C, Nominal	5.499982254	-118
+30 °C, Nominal	5.499982266	-106
+20 °C, +15 %	5.499982311	-61
+20 °C, Nominal	5.499982372	Reference
+20 °C, -15 %	5.499982373	1
+10 °C, Nominal	5.499982413	41
0 °C, Nominal	5.499982355	-17
-10 °C, Nominal	5.499982329	-43
-20 °C, Nominal	5.499982249	-123
-30 °C, Nominal	5.499982202	-170

Table 8.6-2: Band edge drift calculation

Modulation	-26 dBc lower cross point, GHz	Max negative drift, Hz	Drifted lower cross point, GHz	Band edge, GHz	Margin, MHz
802.11a	5.48817308	170	5.488172907	5.47	18.17
802.11n HT20	5.48788462	170	5.487884445	5.47	17.88
802.11n HT40	5.49557692	170	5.495576753	5.47	25.58
Modulation	-26 dBc upper cross point, GHz	Max positive drift, Hz	Drifted upper cross point, GHz	Band edge, GHz	Margin, MHz
802.11a	5.71158654	41	5.711586579	5.725	13.41
802.11n HT20	5.71182692	41	5.711826964	5.725	13.17
802.11n HT40	5.70365385	41	5.703653887	5.725	21.35

Notes: Drifted lower cross point = -26 dBc lower cross point – max negative drift. Drifted upper cross point = -26 dBc upper cross point + max positive drift.

8.7 FCC 15.407(a)(6) and RSS-210 A9.4(2) Peak excursion and PSD-to-average ratio

8.7.1 Definitions and limits

FCC:

(6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

IC:

Within the emission bandwidth, when the peak spectral density per MHz over any continuous transmission exceeds the average ($10 \log_{10} (B)$) value by more than 3 dB, the permissible power spectral density shall be reduced by the excess amount.

8.7.2 Test summary

Test date	October 19, 2012	Test engineer	Andrey Adelberg	Verdict	Pass
Temperature	24 °C	Air pressure	1004 mbar	Relative humidity	32 %

8.7.3 Observations/special notes


FCC test was performed using method described in 789033 D01 General UNII Test Procedures v01r02 under sections F, E and C.

8.7.4 Test data

Table 8.7-1: FCC peak excursion measurements results


Chain	Modulation	Frequency, MHz	Peak excursion, dB	Limit, dB	Margin, dB
ch0	802.11a	5500	10.75	13.00	2.25
ch0	802.11a	5580	10.53	13.00	2.47
ch0	802.11a	5700	11.26	13.00	1.74
ch0	802.11n HT20	5520	10.78	13.00	2.22
ch0	802.11n HT20	5680	10.40	13.00	2.60
ch0	802.11n HT20	5500	10.81	13.00	2.19
ch0	802.11n HT40	5580	11.31	13.00	1.69
ch0	802.11n HT40	5700	10.76	13.00	2.24
ch1	802.11a	5500	10.70	13.00	2.30
ch1	802.11a	5580	10.19	13.00	2.81
ch1	802.11a	5700	10.50	13.00	2.50
ch1	802.11n HT20	5520	10.70	13.00	2.30
ch1	802.11n HT20	5680	10.31	13.00	2.69
ch1	802.11n HT20	5500	10.79	13.00	2.21
ch1	802.11n HT40	5580	10.50	13.00	2.50
ch1	802.11n HT40	5700	10.70	13.00	2.30

8.7.4 Test data, continued

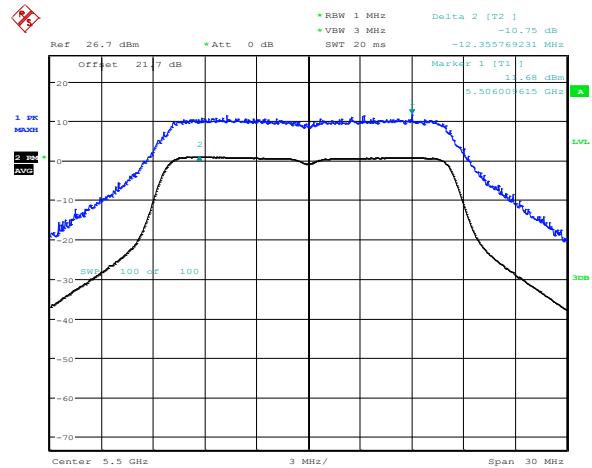


Date: 1.NOV.2012 14:37:01

Diagram 8.7-1: Sample plot for peak excursion on 802.11a

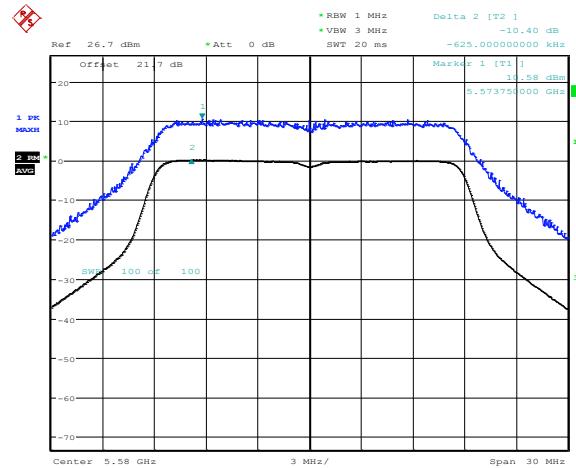

Date: 1.NOV.2012 14:36:08

Diagram 8.7-2: Sample plot for peak excursion on 802.11n HT20

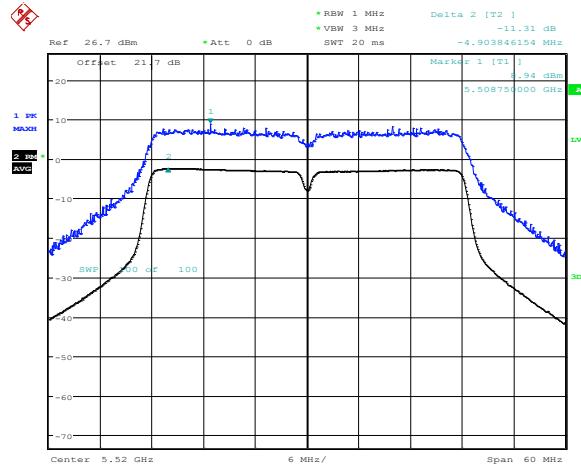

Date: 1.NOV.2012 14:38:43

Diagram 8.7-3: Sample plot for peak excursion on 802.11n HT40

8.7.4 Test data, continued


Table 8.7-2: IC PSD-to-average calculations results

Modulation	Frequency, MHz	PSD result, dBm/MHz	Average result, dBm	Delta dB	Limit, dB	Margin, dB
802.11a	5500	7.15	20.04	-12.89	3.00	15.89
802.11a	5580	6.23	18.79	-12.56	3.00	15.56
802.11a	5700	5.14	17.10	-11.95	3.00	14.95
802.11n HT20	5520	3.78	19.31	-15.53	3.00	18.53
802.11n HT20	5680	1.46	17.04	-15.58	3.00	18.58
802.11n HT20	5500	7.47	20.06	-12.59	3.00	15.59
802.11n HT40	5580	6.50	18.76	-12.26	3.00	15.26
802.11n HT40	5700	5.46	17.14	-11.68	3.00	14.68

Note: Delta is calculated as follows: PSD result – Average result.

Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up

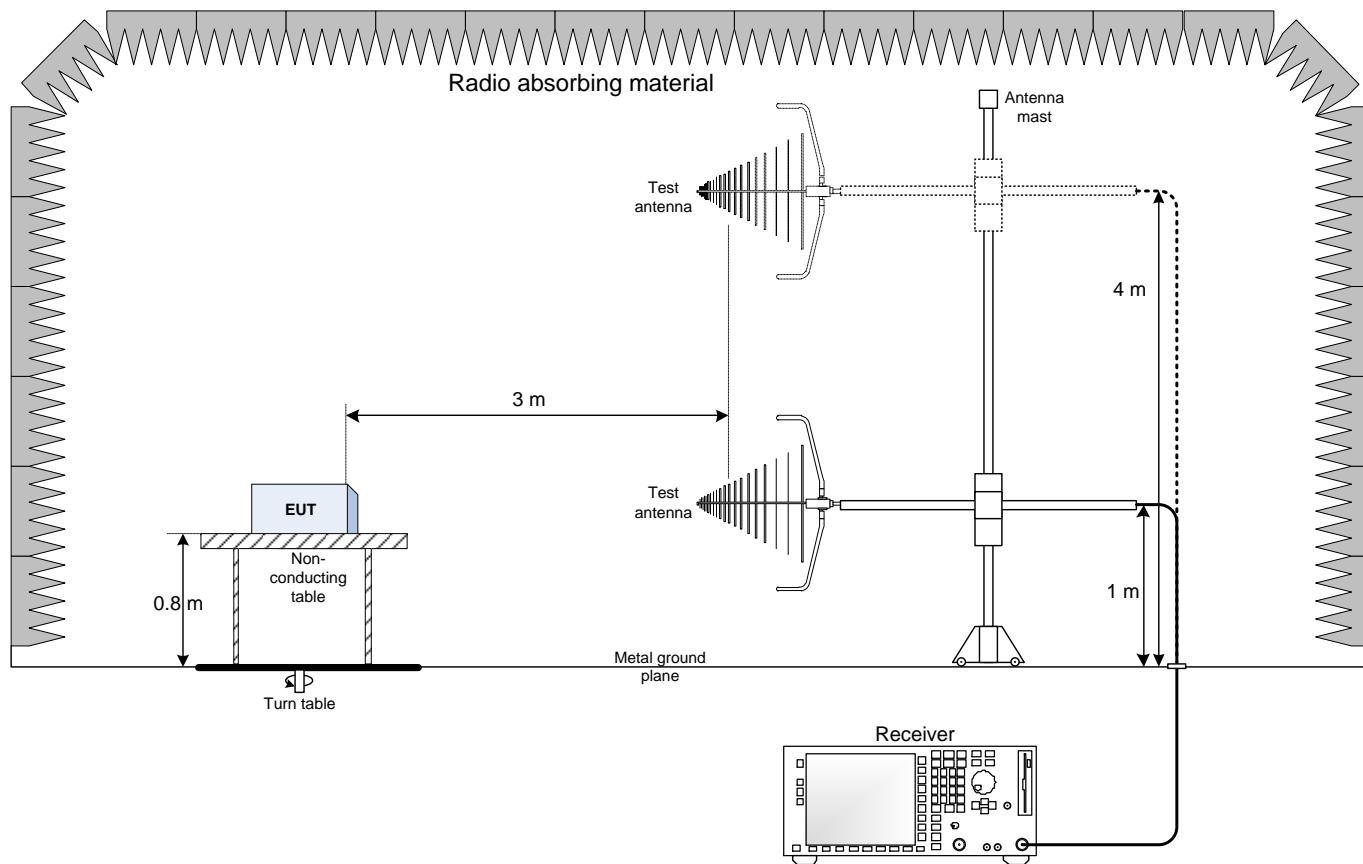

9.2 Conducted emissions set-up

