



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Ericsson Wi-Fi
Applicant Address	6300 Legacy Drive Plano Texas 75024 United States
FCC ID	RAR40065006
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.

Product Name	802.11AC Wireless Router
Brand Name	Ericsson
Model No.	AP 6321
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Aug. 26, 2013
Final Test Date	Apr. 22, 2014
Submission Type	Class II Change
Operating Mode	Master

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5250 ~ 5350MHz / 5470 ~ 5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03, KDB 662911 D01 v02r01, KDB644545 D01v01r02.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	10
3.7. Table for Class II Change	10
3.8. Table for Supporting Units	10
3.9. Table for Parameters of Test Software Setting	11
3.10. EUT Operation during Test	11
3.11. Duty Cycle	12
3.12. Test Configurations	14
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	20
4.3. Maximum Conducted Output Power Measurement.....	35
4.4. Power Spectral Density Measurement	38
4.5. Peak Excursion Measurement	50
4.6. Radiated Emissions Measurement	62
4.7. Band Edge Emissions Measurement	92
4.8. Frequency Stability Measurement	102
4.9. Antenna Requirements	104
5. LIST OF MEASURING EQUIPMENTS	105
6. MEASUREMENT UNCERTAINTY.....	107
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3
APPENDIX D. 20DB BANDWIDTH REPORT.....	D1 ~ D5


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR390508-06	Rev. 01	Initial issue of report	Apr. 03, 2014
FR390508-06	Rev. 02	Add straddle channel (5690 MHz, 5710 MHz and 5720 MHz) for this device.	Jun. 18, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11AC Wireless Router
Brand Name : Ericsson
Model No. : AP 6321
Applicant : Ericsson WI-FI
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 26, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

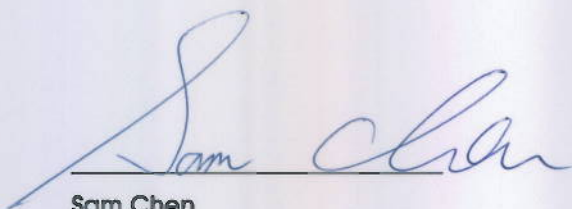

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	3.14 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.15 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.12 dB
4.5	15.407(a)	Peak Excursion	Complies	2.76 dB
4.6	15.407(b)	Radiated Emissions	Complies	0.28 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.08 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter or PoE
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	13 for 20MHz bandwidth ; 6 for 40MHz bandwidth 3 for 80MHz bandwidth
Channel Band Width (99%)	802.11ac MCS0, Nss1 (VHT20): 18.08 MHz ; 802.11ac MCS0, Nss1 (VHT40): 36.80 MHz ; 802.11ac MCS0, Nss1 (VHT80): 76.16 MHz
Maximum Conducted Output Power	Band 2: 802.11ac MCS0, Nss1 (VHT20): 21.72 dBm ; 802.11ac MCS0, Nss1 (VHT40): 23.72 dBm ; 802.11ac MCS0, Nss1 (VHT80): 19.02 dBm Band 3: 802.11ac MCS0, Nss1 (VHT20): 21.71 dBm ; 802.11ac MCS0, Nss1 (VHT40): 23.85 dBm ; 802.11ac MCS0, Nss1 (VHT80): 23.74 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter or PoE
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	13
Channel Band Width (99%)	17.12 MHz
Maximum Conducted Output Power	Band 2: 21.80 dBm ; Band 3: 21.59 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Communication Mode	☒ IP Based (Load Based) ☐ Frame Based
TPC Function	☒ With TPC ☐ Without TPC
Weather Band (5600~5650MHz)	☐ With 5600~5650MHz ☒ Without 5600~5650MHz
For 2.4GHz: Beamforming Function	☒ With beamforming ☐ Without beamforming
For 5GHz: Beamforming Function	☐ With beamforming ☒ Without beamforming

Antenna and Bandwidth

Antenna	Three (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

Note : The product can support both beamforming and non-beamforming functions in 2400 ~ 2483.5MHz.

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9, Nss1-3
802.11ac (VHT40)	3	MCS 0-9, Nss1-3
802.11ac (VHT80)	3	MCS 0-9, Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

N/A

3.3. Table for Filed Antenna


Ant.	Brand	Model No.	Antenna Type	Connector	Gain (dBi)	
					Band 2	Band 3
4	WNC	95EAAH15.G66	PIFA Antenna	I-PEX	4.49	5.01
5	WNC	95EAAH15.G67	PIFA Antenna	I-PEX	3.48	3.99
6	WNC	95EAAH15.G68	PIFA Antenna	I-PEX	4.39	3.72

Note: The EUT has six antennas.

<For 5GHz Band:>

For IEEE 802.11a/n/ac mode (3TX/3RX):

Ant. 4, Ant. 5 and Ant. 6 could transmit/receive simultaneously.

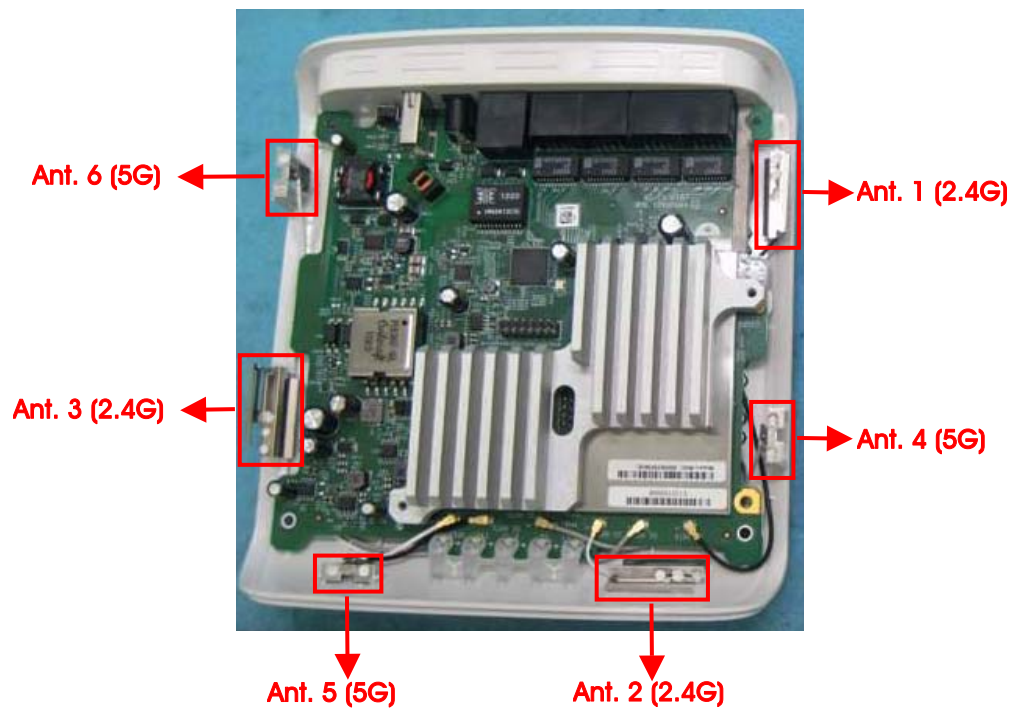

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140, 144.

For 40MHz bandwidth systems, use Channel 54, 62, 102, 110, 134, 142.

For 80MHz bandwidth systems, use Channel 58, 106, 138.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
	58	5290 MHz	-	-
5470~5725 MHz Band 3	100	5500 MHz	132	5660 MHz
	102	5510 MHz	134	5670 MHz
	104	5520 MHz	136	5680 MHz
	106	5530 MHz	138	5690 MHz
	108	5540 MHz	140	5700 MHz
	110	5550 MHz	142	5710 MHz
	112	5560 MHz	144	5720 MHz
	116	5580 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	CTX		-	-	-
Max. Conducted Output Power	11ac VHT20	Band 2-3	MCS0, Nss1	52/60/64/100/ 116/140/144	4+5+6
	11ac VHT40	Band 2-3	MCS0, Nss1	54/62/102/110/ 134/142	4+5+6
	11ac VHT80	Band 2-3	MCS0, Nss1	58/106/138	4+5+6
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140/144	4+5+6
Power Spectral Density	11ac VHT20	Band 2-3	MCS0, Nss1	52/60/64/100/ 116/140/144	4+5+6
	11ac VHT40	Band 2-3	MCS0, Nss1	54/62/102/110/ 134/142	4+5+6
	11ac VHT80	Band 2-3	MCS0, Nss1	58/106/138	4+5+6
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140/144	4+5+6
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT20	Band 2-3	MCS0, Nss1	52/60/64/100/ 116/140/144	4+5+6
	11ac VHT40	Band 2-3	MCS0, Nss1	54/62/102/110/ 134/142	4+5+6
	11ac VHT80	Band 2-3	MCS0, Nss1	58/106/138	4+5+6
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140/144	4+5+6
Peak Excursion	11ac VHT20	Band 2-3	MCS0, Nss1	52/140/144	4+5+6
	11ac VHT40	Band 2-3	MCS0, Nss1	54/134/142	4+5+6
	11ac VHT80	Band 2-3	MCS0, Nss1	58/106/138	4+5+6
	11a/BPSK	Band 2-3	6Mbps	52/116/144	4+5+6
Radiated Emission Below 1GHz	CTX		-	-	-

Radiated Emission Above 1GHz	11ac VHT20	Band 2-3	MCS0, Nss1	52/60/64/100/ 116/140/144	4+5+6
	11ac VHT40	Band 2-3	MCS0, Nss1	54/62/102/110/ 134/142	4+5+6
	11ac VHT80	Band 2-3	MCS0, Nss1	58/106/138	4+5+6
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140/144	4+5+6
Band Edge Emission	11ac VHT20	Band 2-3	MCS0, Nss1	52/60/64/100/ 116/140/144	4+5+6
	11ac VHT40	Band 2-3	MCS0, Nss1	54/62/102/110/ 134/142	4+5+6
	11ac VHT80	Band 2-3	MCS0, Nss1	58/106/138	4+5+6
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140/144	4+5+6
Frequency Stability	Un-modulation		-	60/100/144	4+5+6

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation.

The following test modes were performed for all tests:

For Radiated Emissions and Radiated Emission Co-location tests:

There are two modes of EUT, one is Laying of EUT, and the other is Stand of EUT.

After evaluating, Laying of EUT has been evaluated to be the worst case.

Consequently, measurement for Radiated Emission and Radiated Emission Co-location tests will follow this same test mode.

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (Please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR390508

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Add Band 2 and Band 3 (5250~5350 MHz, 5470~5725 MHz) for this device.	1. AC Power Line Conducted Emissions 2. 26dB Spectrum Bandwidth and 99% Occupied Bandwidth 3. Maximum Conducted Output Power 4. Power Spectral Density 5. Peak Excursion 6. Radiated Emissions 7. Band Edge Emissions 8. Frequency Stability 9. Co-location MPE 10. Radiated Emission Co-location 11. 20dB bandwidth of the adjacent channels to 5600~5650MHz.

3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
Adapter	LEADER	MU24-B480050-A1	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT20

Test Software Version	DOS						
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz	5720 MHz
MCS0, Nss1 VHT20	14	14	14	14	14	14	14

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT40

Test Software Version	DOS					
Frequency	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz	5710 MHz
MCS0, Nss1 VHT40	16.5	14.5	13	16.5	16.5	16.5

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT80

Test Software Version	DOS		
Frequency	5290 MHz	5530 MHz	5690 MHz
MCS0, Nss1 VHT80	12.5	12	17

Power Parameters of IEEE 802.11a


Test Software Version	DOS						
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz	5720 MHz
IEEE 802.11a	14	14	14	14	14	13.5	14.5

3.10. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.11.1. Duty Cycle

IEEE 802.11ac MCS0, Nss1 VHT20

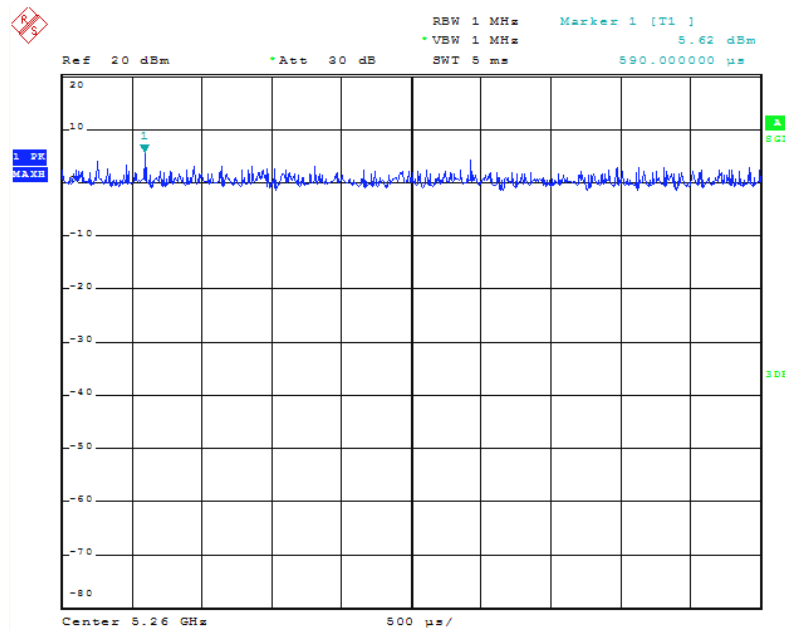


Date: 14.MAR.2014 21:07:14

IEEE 802.11ac MCS0, Nss1 VHT40

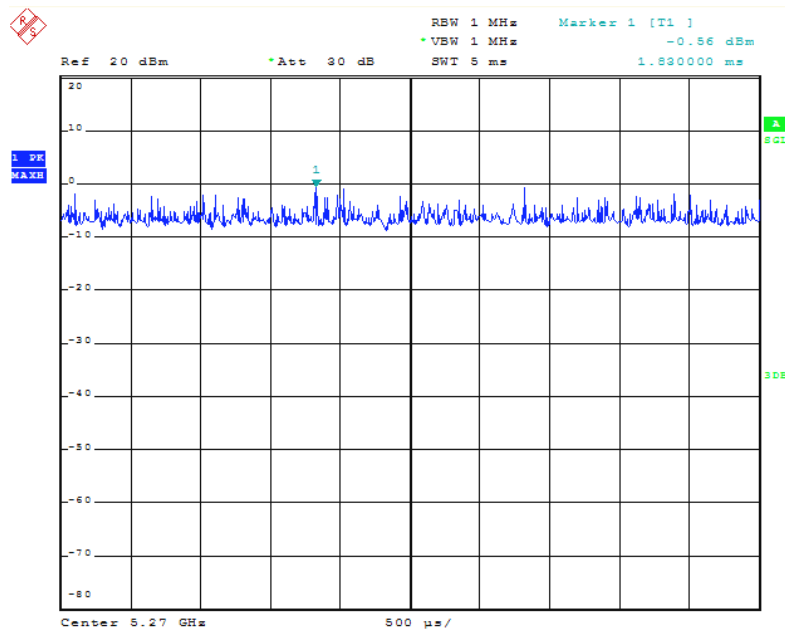


Date: 14.MAR.2014 21:07:53

IEEE 802.11ac MCS0, Nss1 VHT80

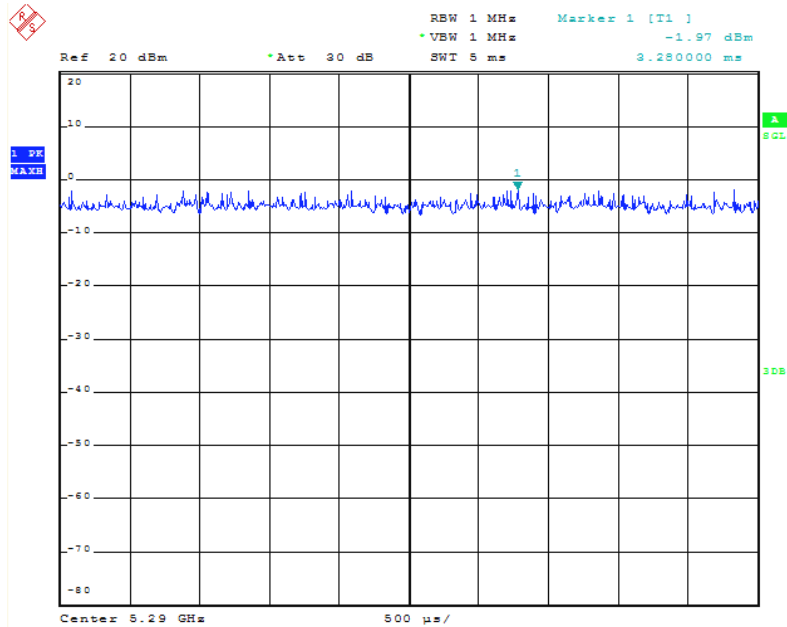


Date: 14.MAR.2014 21:08:27

IEEE 802.11a

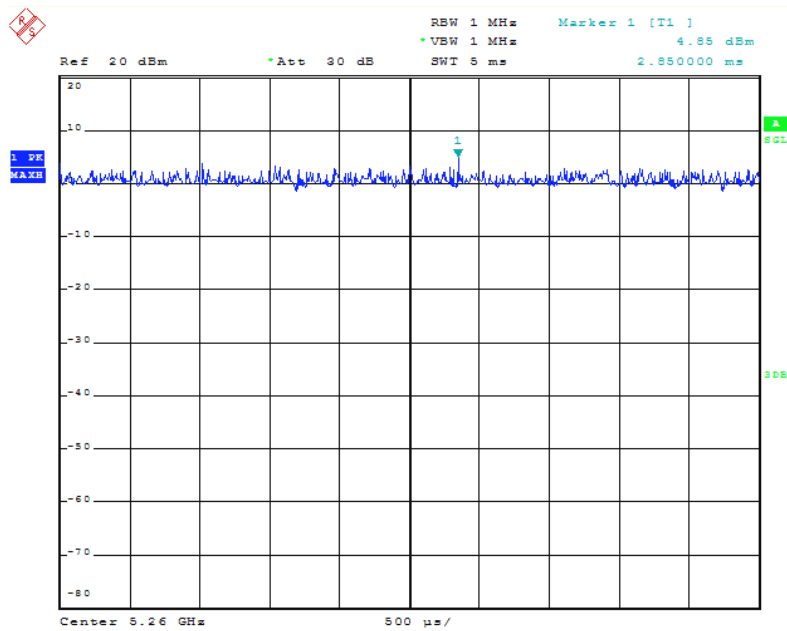

Date: 14.MAR.2014 21:05:43

3.12. Test Configurations

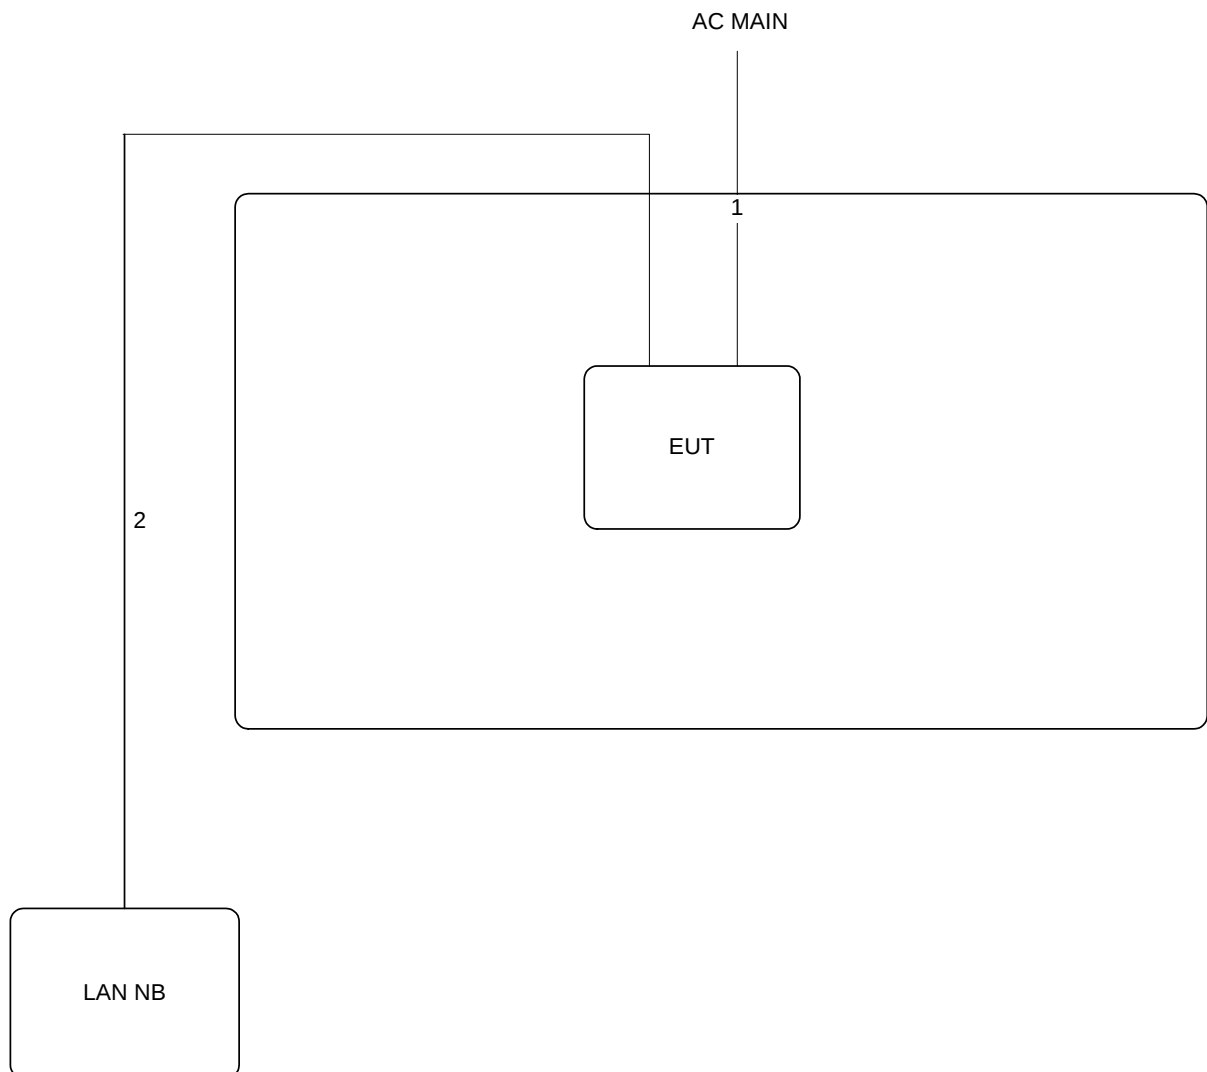

Item	Connection	Shielded	Length
1	AC power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

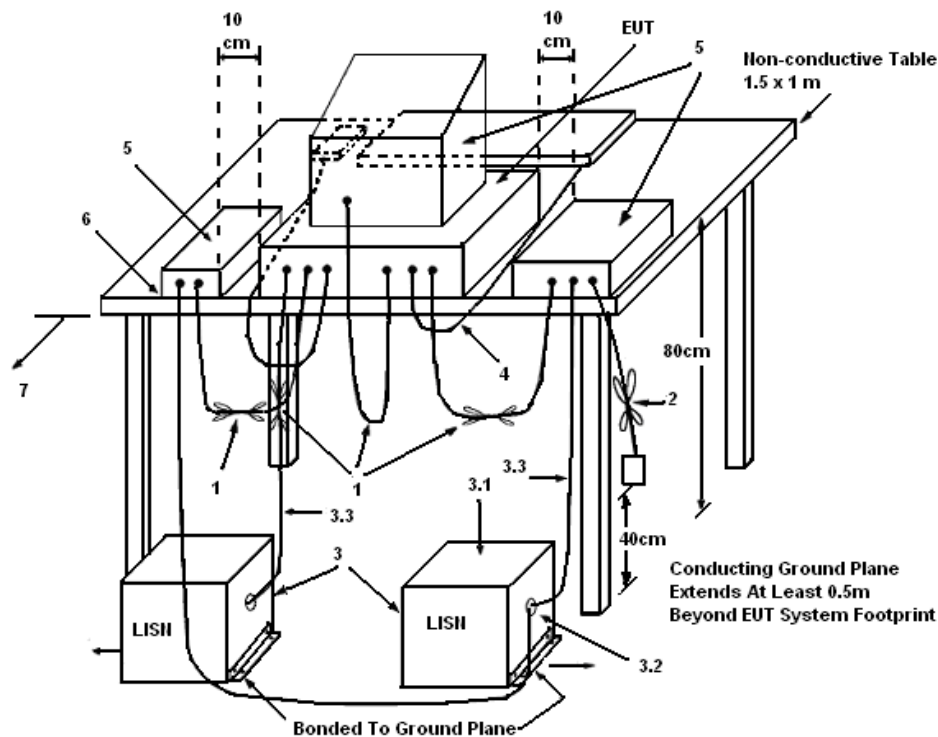

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement


Temperature	24°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Line
Configuration	CTX		

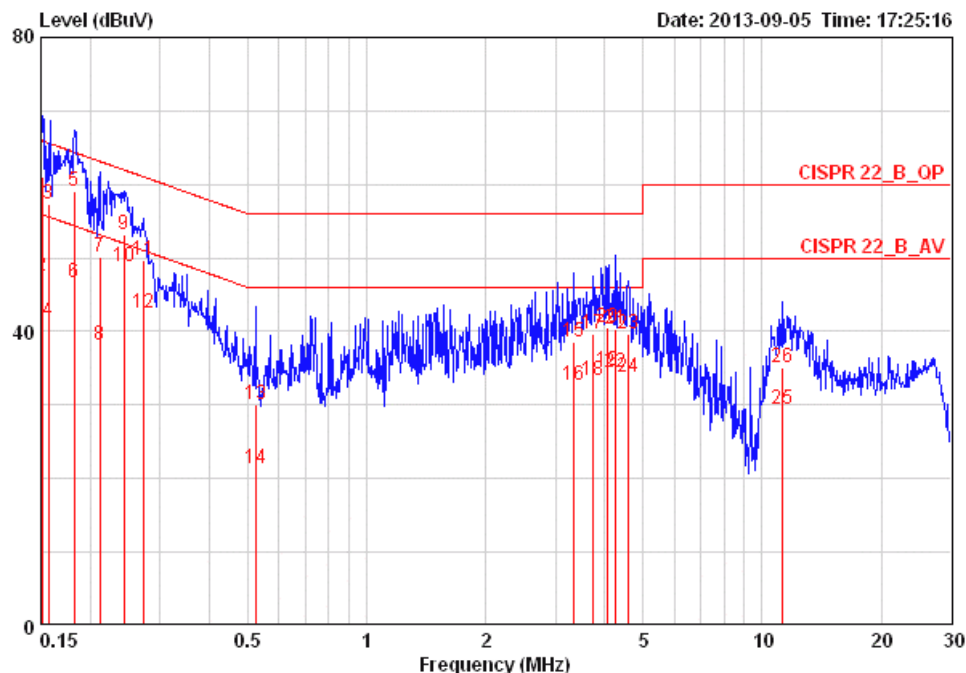

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1 @	0.15080	61.09	-4.87	65.96	60.76	0.15	0.18	LINE	QP
2 @	0.15080	47.44	-8.52	55.96	47.11	0.15	0.18	LINE	AVERAGE
3 @	0.15650	57.26	-8.39	65.65	56.93	0.15	0.18	LINE	QP
4	0.15650	41.47	-14.18	55.65	41.14	0.15	0.18	LINE	AVERAGE
5 @	0.18249	59.09	-5.28	64.37	58.75	0.15	0.19	LINE	QP
6 @	0.18249	46.72	-7.65	54.37	46.38	0.15	0.19	LINE	AVERAGE
7	0.21167	50.14	-13.00	63.14	49.79	0.15	0.20	LINE	QP
8	0.21167	38.20	-14.94	53.14	37.85	0.15	0.20	LINE	AVERAGE
9	0.24293	53.23	-8.77	62.00	52.88	0.15	0.20	LINE	QP
10 @	0.24293	48.86	-3.14	52.00	48.51	0.15	0.20	LINE	AVERAGE
11	0.27152	49.72	-11.35	61.07	49.37	0.15	0.20	LINE	QP
12 @	0.27152	42.55	-8.52	51.07	42.20	0.15	0.20	LINE	AVERAGE
13	0.52376	30.14	-25.86	56.00	29.79	0.15	0.20	LINE	QP
14	0.52376	21.36	-24.64	46.00	21.01	0.15	0.20	LINE	AVERAGE
15	3.346	38.65	-17.35	56.00	38.13	0.25	0.27	LINE	QP
16	3.346	32.60	-13.40	46.00	32.08	0.25	0.27	LINE	AVERAGE
17	3.720	39.73	-16.27	56.00	39.17	0.27	0.29	LINE	QP
18	3.720	33.30	-12.70	46.00	32.74	0.27	0.29	LINE	AVERAGE
19	4.049	34.57	-11.43	46.00	33.99	0.28	0.30	LINE	AVERAGE
20	4.049	40.51	-15.49	56.00	39.93	0.28	0.30	LINE	QP
21	4.247	40.37	-15.63	56.00	39.78	0.28	0.31	LINE	QP
22	4.247	34.46	-11.54	46.00	33.87	0.28	0.31	LINE	AVERAGE
23	4.574	39.64	-16.36	56.00	39.04	0.29	0.31	LINE	QP
24	4.574	33.77	-12.23	46.00	33.17	0.29	0.31	LINE	AVERAGE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
25	11.198	29.38	-20.62	50.00	28.60	0.40	0.38	LINE	AVERAGE
26	11.198	35.11	-24.89	60.00	34.33	0.40	0.38	LINE	QP

Temperature	24°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	CTX		

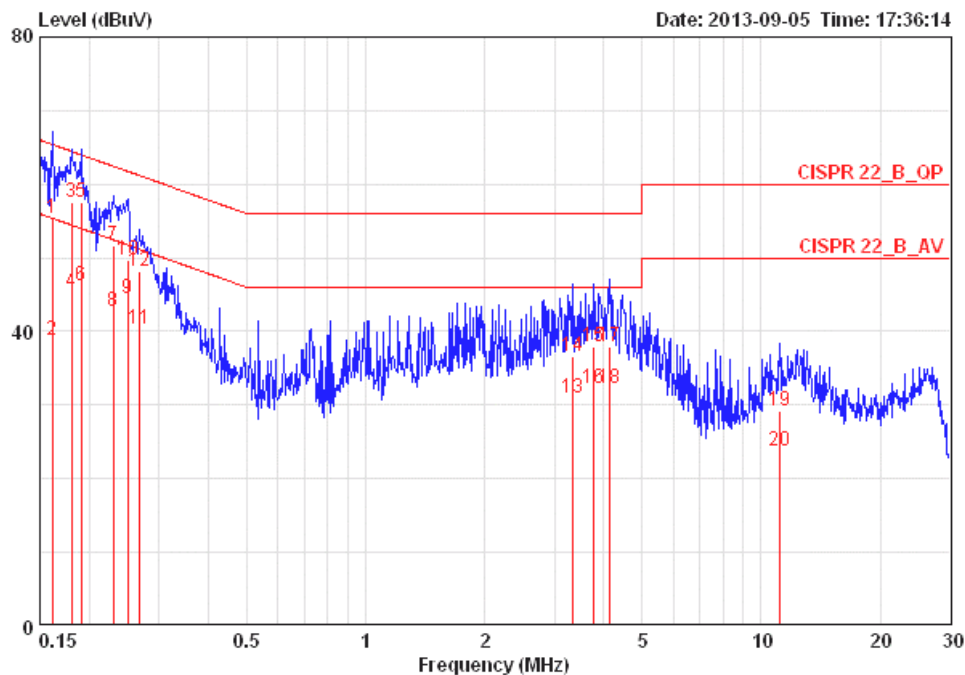

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.16155	55.33	-10.05	65.38	55.08	0.07	0.18	NEUTRAL	QP
2	0.16155	38.77	-16.61	55.38	38.52	0.07	0.18	NEUTRAL	AVERAGE
3	0.18056	57.48	-6.98	64.46	57.22	0.07	0.19	NEUTRAL	QP
4	0.18056	45.33	-9.13	54.46	45.07	0.07	0.19	NEUTRAL	AVERAGE
5	0.19039	57.65	-6.37	64.02	57.38	0.07	0.20	NEUTRAL	QP
6	0.19039	46.28	-7.74	54.02	46.01	0.07	0.20	NEUTRAL	AVERAGE
7	0.23040	51.77	-10.67	62.44	51.50	0.07	0.20	NEUTRAL	QP
8	0.23040	42.73	-9.71	52.44	42.46	0.07	0.20	NEUTRAL	AVERAGE
9	0.25078	44.56	-7.17	51.73	44.29	0.07	0.20	NEUTRAL	AVERAGE
10	0.25078	49.75	-11.98	61.73	49.48	0.07	0.20	NEUTRAL	QP
11	0.26724	40.23	-10.97	51.20	39.96	0.07	0.20	NEUTRAL	AVERAGE
12	0.26724	48.24	-12.96	61.20	47.97	0.07	0.20	NEUTRAL	QP
13	3.346	31.06	-14.94	46.00	30.67	0.12	0.27	NEUTRAL	AVERAGE
14	3.346	36.60	-19.40	56.00	36.21	0.12	0.27	NEUTRAL	QP
15	3.779	38.03	-17.97	56.00	37.61	0.13	0.29	NEUTRAL	QP
16	3.779	32.17	-13.83	46.00	31.75	0.13	0.29	NEUTRAL	AVERAGE
17	4.136	38.02	-17.98	56.00	37.58	0.13	0.30	NEUTRAL	QP
18	4.136	32.18	-13.82	46.00	31.74	0.13	0.30	NEUTRAL	AVERAGE
19	11.139	29.29	-30.71	60.00	28.62	0.29	0.38	NEUTRAL	QP
20	11.139	23.83	-26.17	50.00	23.16	0.29	0.38	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	20°C	Humidity	62%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	21.76	18.08
60	5300 MHz	23.04	18.08
64	5320 MHz	21.92	17.76
100	5500 MHz	19.68	17.28
116	5580 MHz	20.16	17.28
140	5700 MHz	19.20	16.32
144	5720 MHz	22.56	18.56

Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
54	5270 MHz	40.00	35.84
62	5310 MHz	42.88	36.48
102	5510 MHz	40.64	35.20
110	5550 MHz	41.92	36.80
134	5670 MHz	41.92	36.48
142	5710 MHz	42.56	36.16

Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 4 + Ant. 5 + Ant. 6


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
58	5290 MHz	87.04	75.52
106	5530 MHz	83.20	75.52
138	5690 MHz	83.20	76.16

Temperature	20°C	Humidity	62%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	21.60	16.80
60	5300 MHz	21.28	17.12
64	5320 MHz	20.80	16.96
100	5500 MHz	21.76	16.48
116	5580 MHz	20.80	16.96
140	5700 MHz	21.60	16.96
144	5720 MHz	19.68	16.80

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 4 + Ant. 5 + Ant. 6 / 5260 MHz

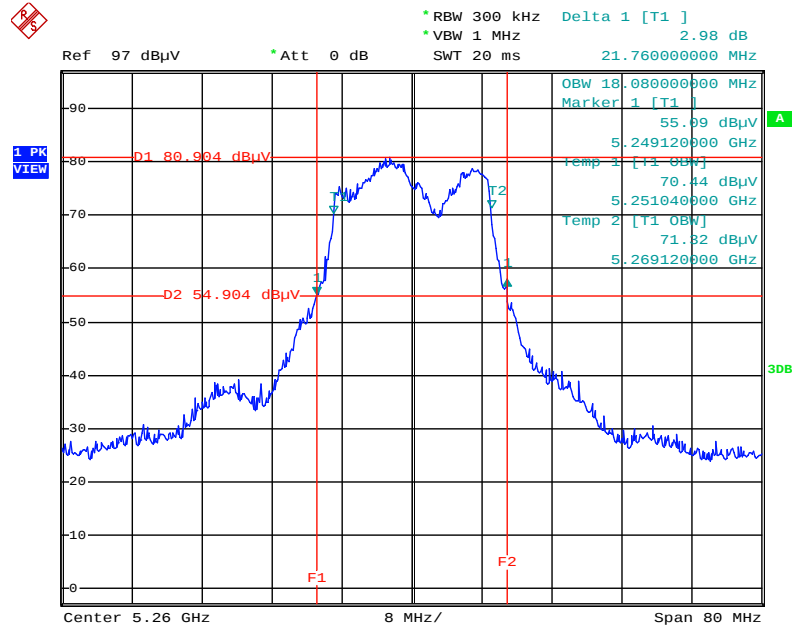


Date: 14.MAR.2014 19:23:27

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 4 + Ant. 5 + Ant. 6 / 5300 MHz

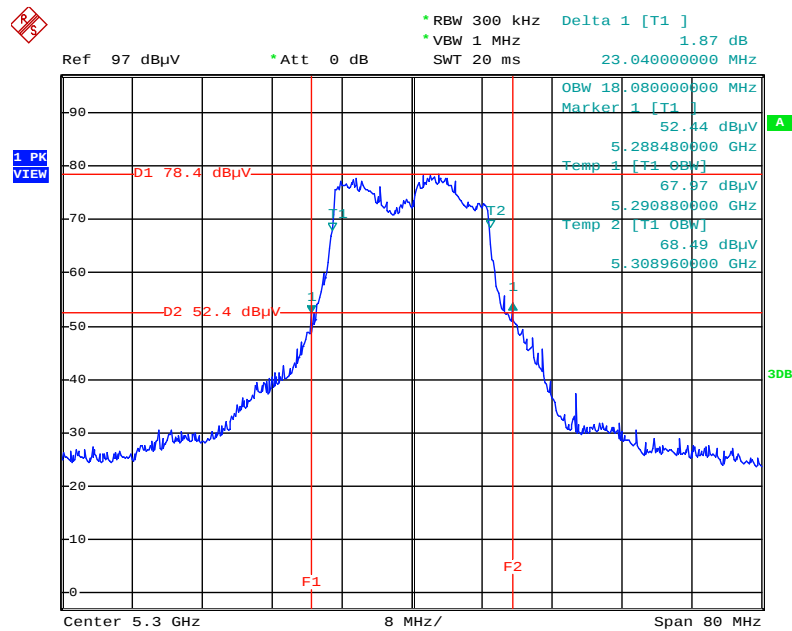


Date: 14.MAR.2014 19:22:54

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 4 + Ant. 5 + Ant. 6 / 5320 MHz

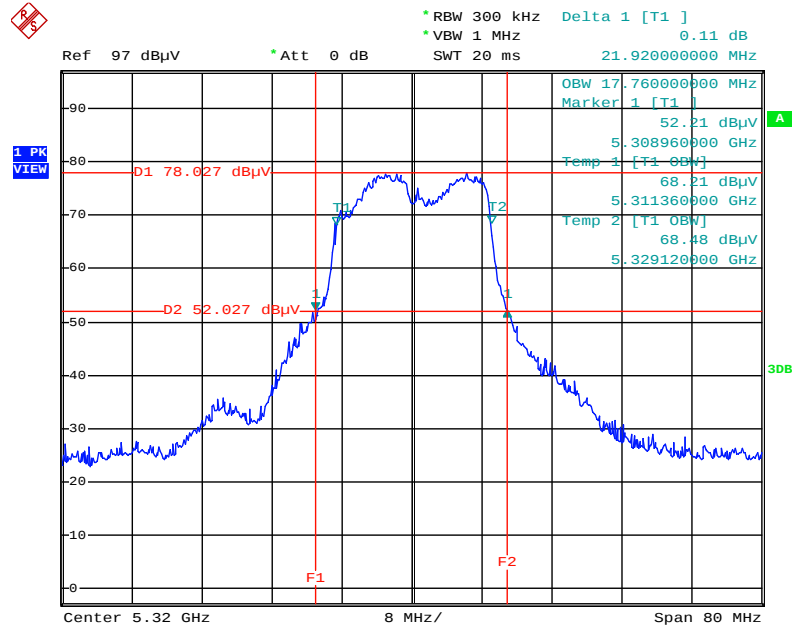


Date: 14.MAR.2014 19:21:36

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 4 + Ant. 5 + Ant. 6 / 5500 MHz

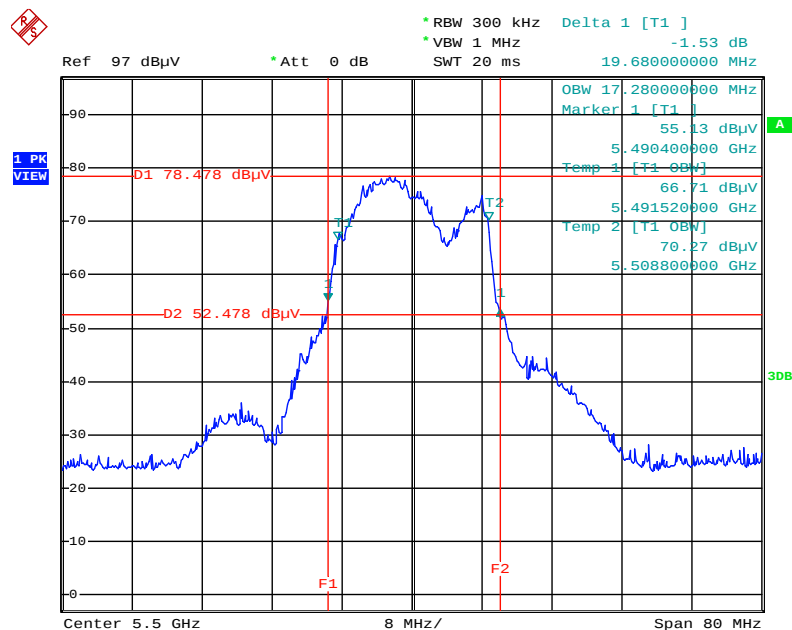


Date: 14.MAR.2014 19:20:53

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 4 + Ant. 5 + Ant. 6 / 5580 MHz

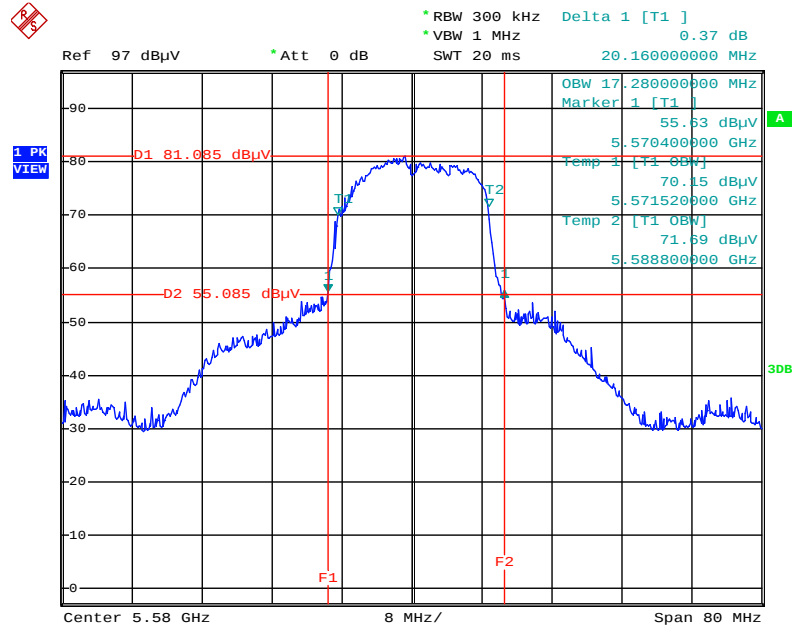


Date: 14.MAR.2014 19:19:42

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 4 + Ant. 5 + Ant. 6 / 5700 MHz

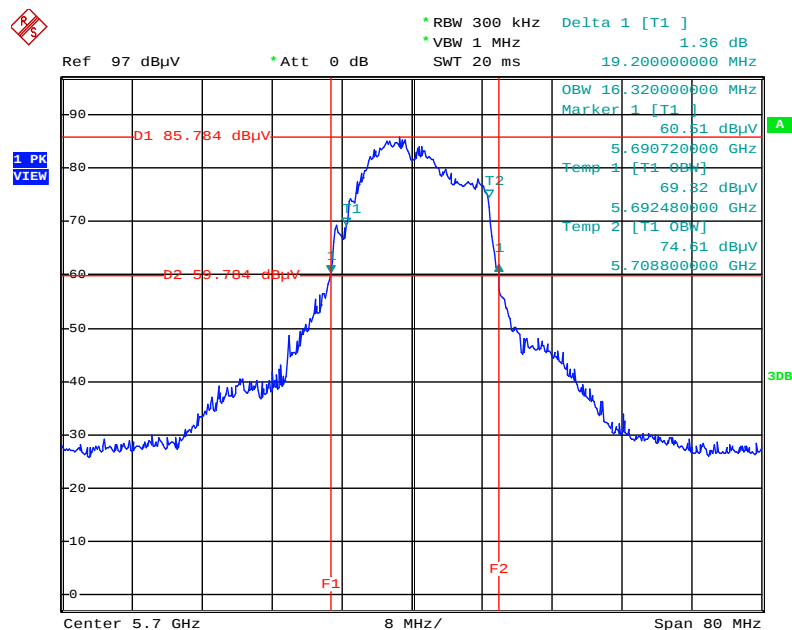


Date: 14.MAR.2014 19:17:37

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 4 + Ant. 5 + Ant. 6 / 5720 MHz

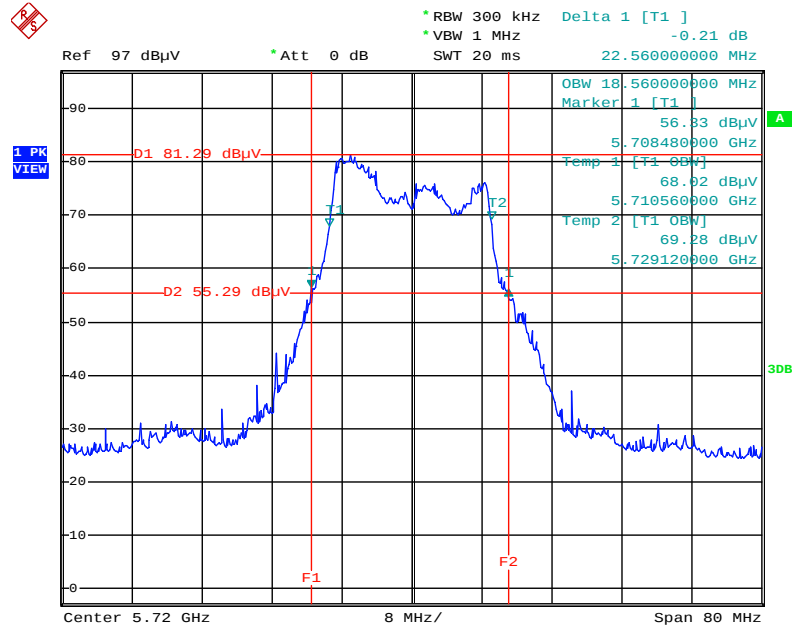


Date: 22.APR.2014 21:03:27

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 4 + Ant. 5 + Ant. 6 / 5270 MHz

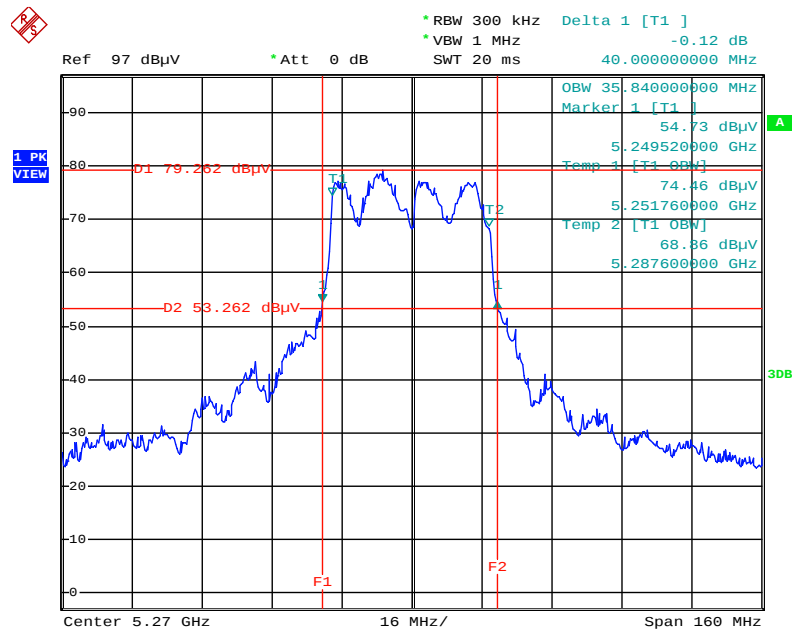


Date: 14.MAR.2014 19:25:07

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 4 + Ant. 5 + Ant. 6 / 5310 MHz

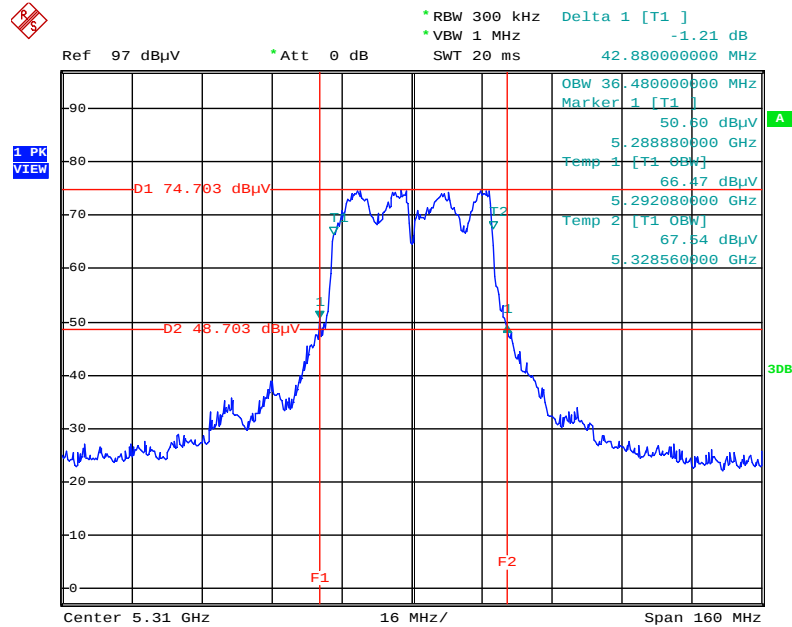


Date: 14.MAR.2014 19:25:59

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 4 + Ant. 5 + Ant. 6 / 5510 MHz

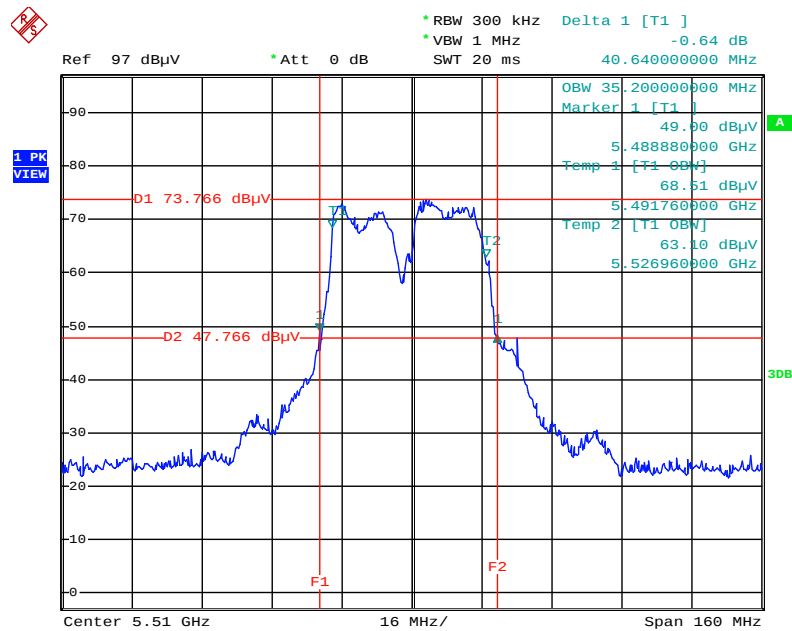


Date: 14.MAR.2014 19:26:51

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 4 + Ant. 5 + Ant. 6 / 5550 MHz

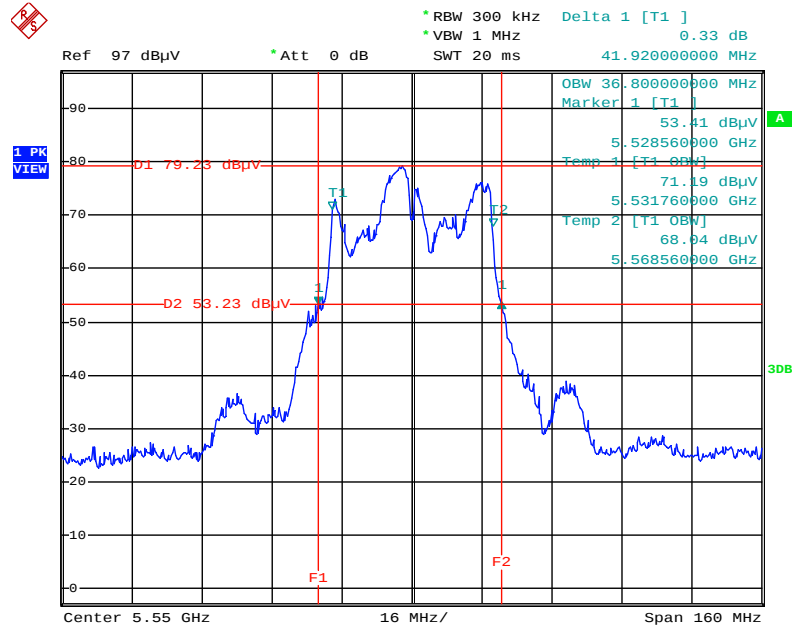


Date: 14.MAR.2014 19:27:53

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 4 + Ant. 5 + Ant. 6 / 5670 MHz

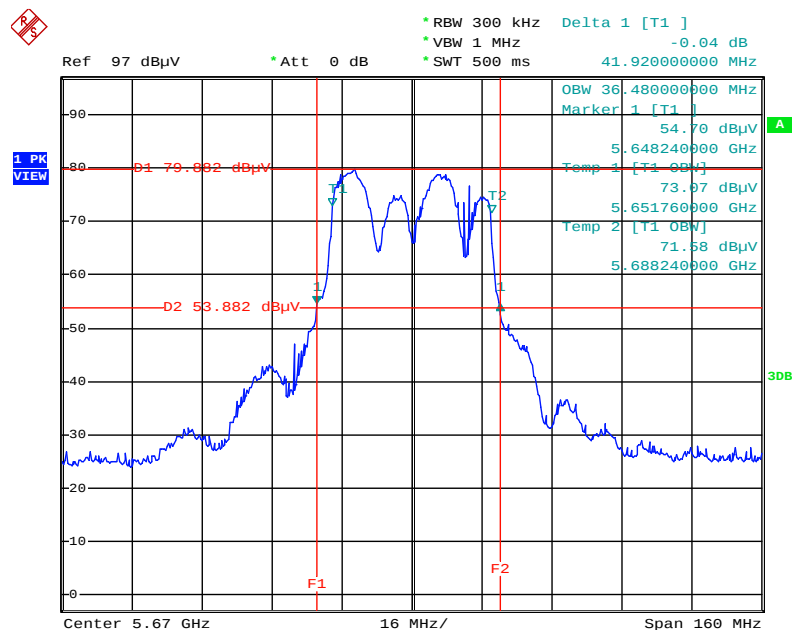


Date: 14.MAR.2014 19:28:34

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 4 + Ant. 5 + Ant. 6 / 5710 MHz

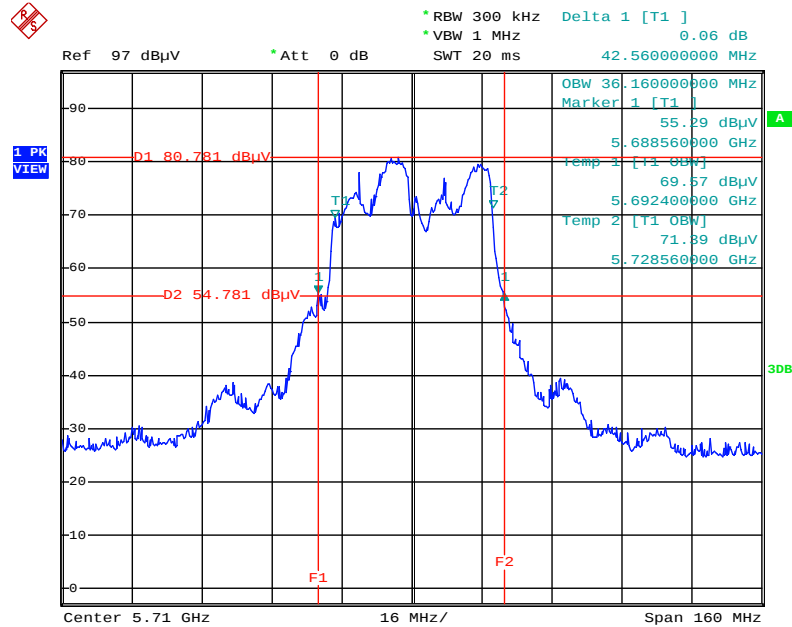


Date: 22.APR.2014 21:05:19

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 4 + Ant. 5 + Ant. 6 / 5290 MHz

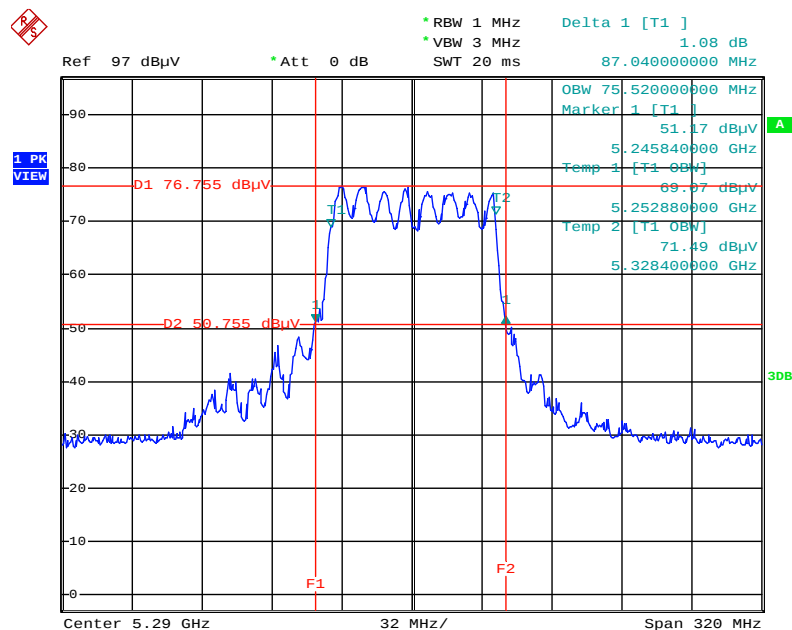


Date: 14.MAR.2014 19:41:47

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 /
Ant. 4 + Ant. 5 + Ant. 6 / 5530 MHz

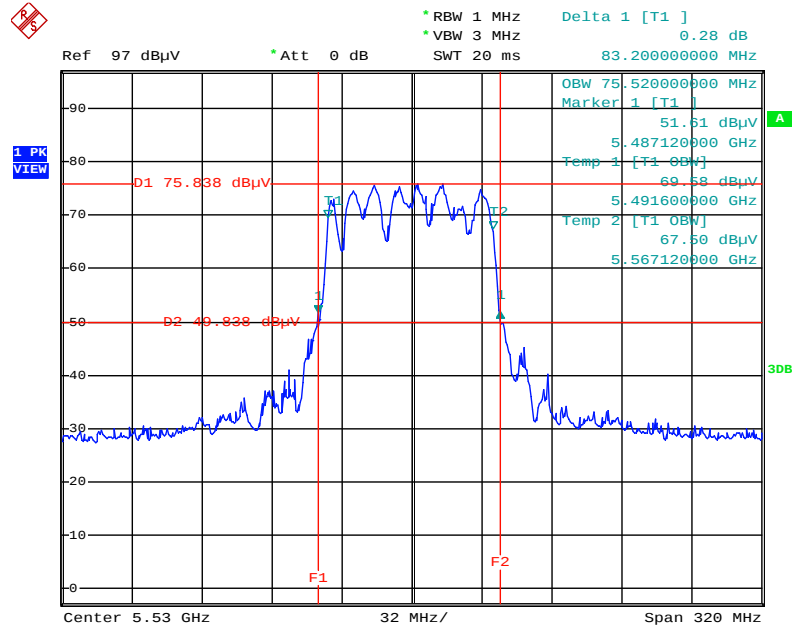


Date: 14.MAR.2014 19:29:48

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 /
Ant. 4 + Ant. 5 + Ant. 6 / 5690 MHz

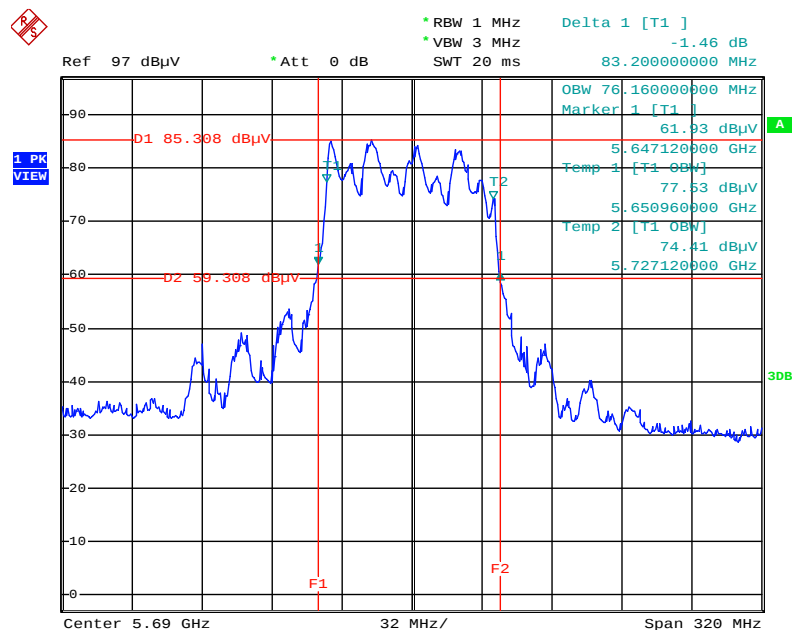


Date: 22.APR.2014 21:09:30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5260 MHz

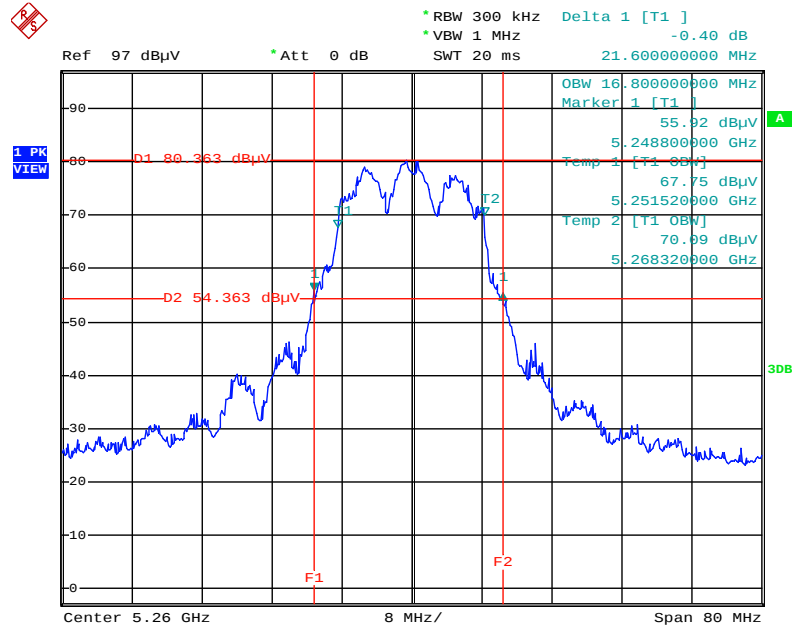


Date: 14.MAR.2014 18:21:58

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5300 MHz

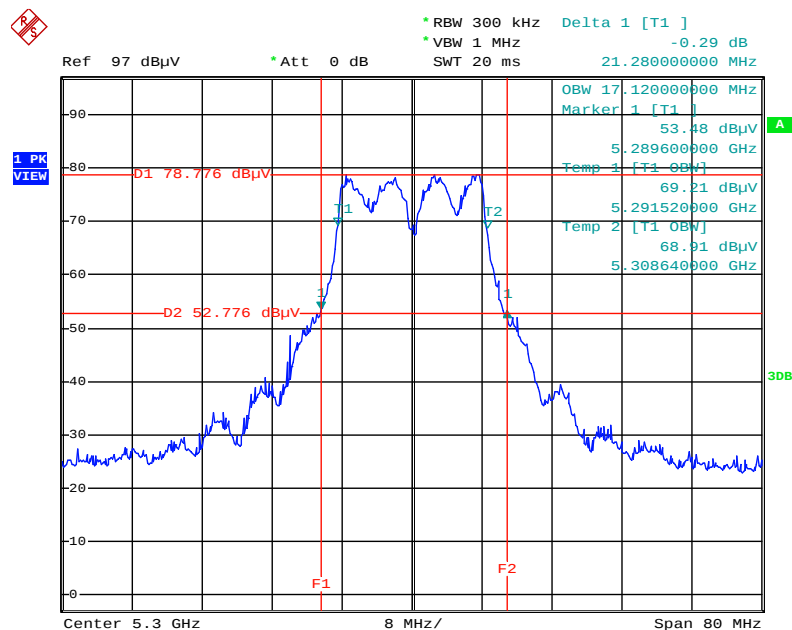


Date: 14.MAR.2014 18:23:13

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5320 MHz

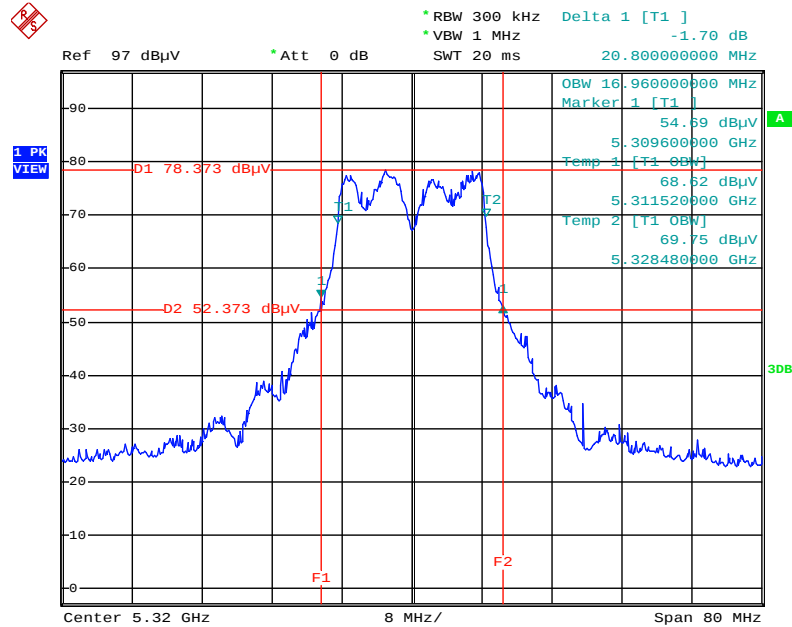


Date: 14.MAR.2014 18:23:50

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5500 MHz

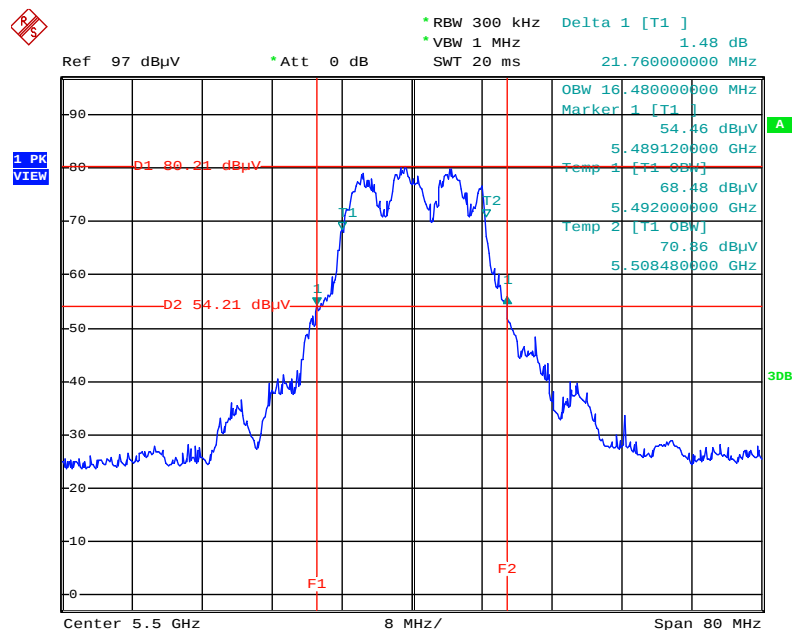


Date: 14.MAR.2014 18:25:50

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5580 MHz

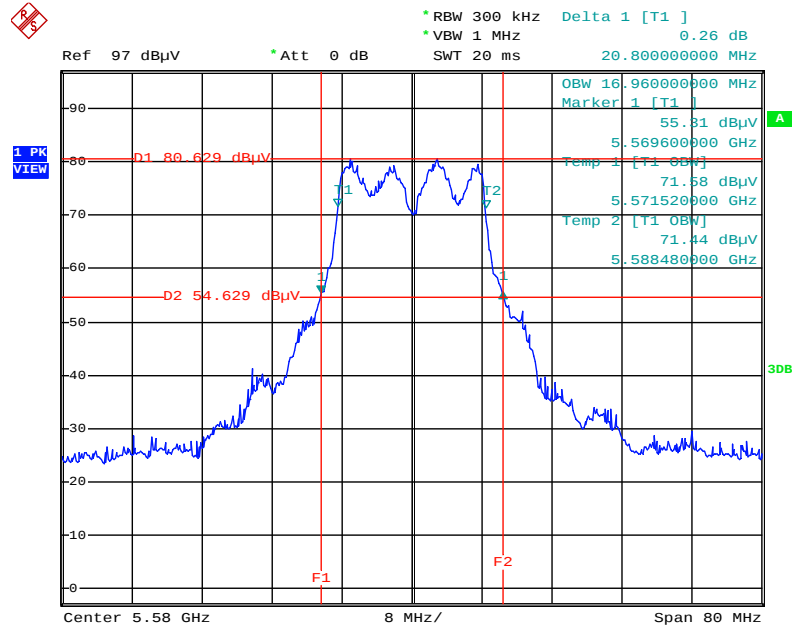


Date: 14.MAR.2014 18:33:04

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5700 MHz

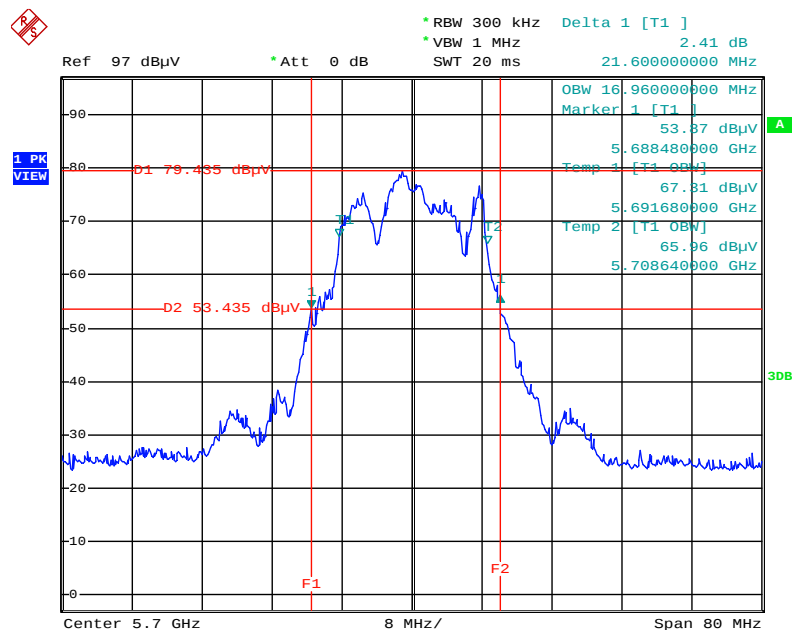

Date: 14.MAR.2014 18:29:26

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5720 MHz

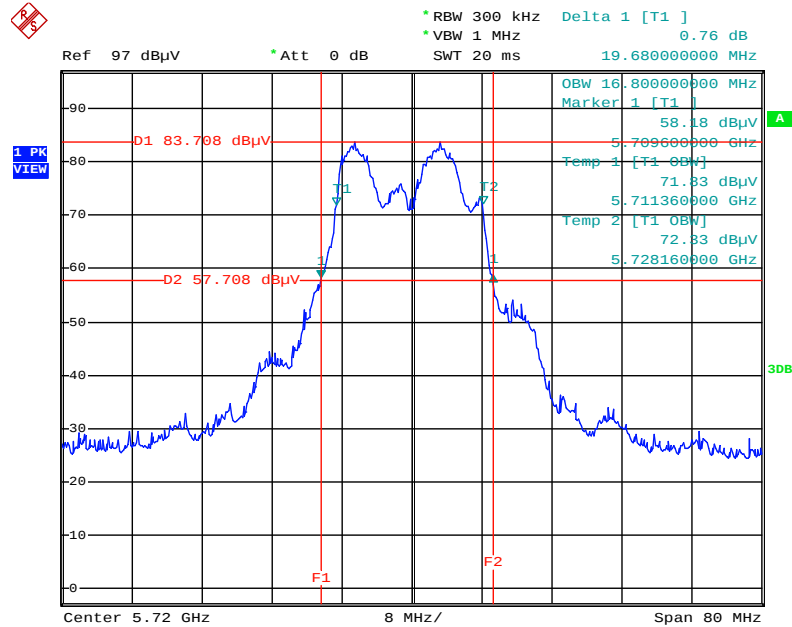

Date: 22.APR.2014 21:00:39

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or $11 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power => (3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	62%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Date	Ch 138, 142, 144: Apr. 22, 2014 / Other Ch: Mar. 14, 2014		

Configuration IEEE 802.11ac MCS0, Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 4	Ant. 5	Ant. 6	Total		
52	5260 MHz	16.89	17.36	16.55	21.72	24.00	Complies
60	5300 MHz	16.76	17.02	16.36	21.49	24.00	Complies
64	5320 MHz	16.58	16.95	16.42	21.43	24.00	Complies
100	5500 MHz	15.69	17.01	16.02	21.05	23.94	Complies
116	5580 MHz	16.26	17.59	16.25	21.52	24.00	Complies
140	5700 MHz	16.42	17.65	16.65	21.71	23.83	Complies
144	5720 MHz	16.29	17.48	16.36	21.52	24.00	Complies

Note: Ch 100 power limit = $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(19.68) = 23.94\text{dBm} < 24\text{dBm}$, so limit = 23.94dBm.

Ch 140 power limit = $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(19.20) = 23.83\text{dBm} < 24\text{dBm}$, so limit = 23.83dBm.

Configuration IEEE 802.11ac MCS0, Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 4	Ant. 5	Ant. 6	Total		
54	5270 MHz	19.25	18.72	18.86	23.72	24.00	Complies
62	5310 MHz	16.42	16.82	16.63	21.40	24.00	Complies
102	5510 MHz	14.46	15.12	14.32	19.42	24.00	Complies
110	5550 MHz	18.98	18.47	18.51	23.43	24.00	Complies
134	5670 MHz	19.67	18.63	18.87	23.85	24.00	Complies
142	5710 MHz	18.67	19.25	18.46	23.58	24.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 4	Ant. 5	Ant. 6	Total		
58	5290 MHz	14.23	14.57	13.91	19.02	24.00	Complies
106	5530 MHz	13.79	14.39	13.82	18.78	24.00	Complies
138	5690 MHz	18.59	19.59	18.64	23.74	24.00	Complies

Temperature	20°C	Humidity	62%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a
Test Date	Ch 144: Apr. 22, 2014 / Other Ch: Mar. 14, 2014		

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 4	Ant. 5	Ant. 6	Total		
52	5260 MHz	17.24	17.12	16.70	21.80	24.00	Complies
60	5300 MHz	16.79	16.81	16.65	21.52	24.00	Complies
64	5320 MHz	17.09	16.87	16.65	21.64	24.00	Complies
100	5500 MHz	15.89	16.72	15.93	20.97	24.00	Complies
116	5580 MHz	16.32	17.65	16.35	21.59	24.00	Complies
140	5700 MHz	16.15	17.56	16.45	21.53	24.00	Complies
144	5720 MHz	15.98	17.32	16.65	21.46	23.94	Complies

Note: Ch 144 power limit = $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(19.68) = 23.94\text{dBm} < 24\text{dBm}$, so limit = 23.94dBm.

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.25-5.35 GHz	11
5.470-5.725 GHz	11

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

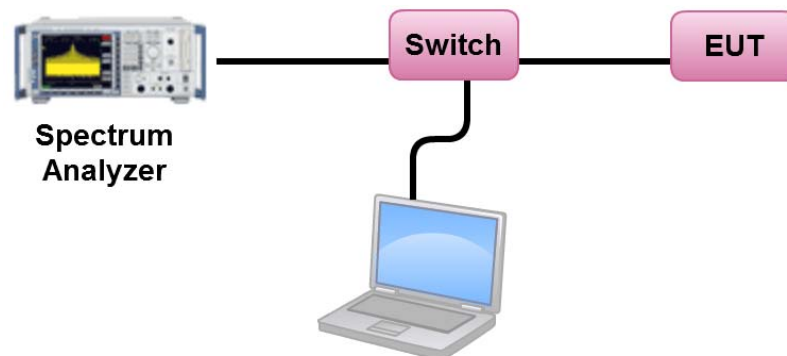

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	62%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Date	Ch 138, 142, 144: Apr. 22, 2014 / Other Ch: Mar. 14, 2014		

Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	7.83	8.09	Complies
60	5300 MHz	7.61	8.09	Complies
64	5320 MHz	7.71	8.09	Complies
100	5500 MHz	7.59	7.95	Complies
116	5580 MHz	7.59	7.95	Complies
140	5700 MHz	7.74	7.95	Complies
144	5720 MHz	7.46	7.95	Complies

Note: Ch 52, 60, 64 directional gain

$$= 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.91 \text{ dBi} > 6 \text{ dBi}, \text{ so limit} = 11 - (8.91 - 6) = 8.09 \text{ dBm/MHz}.$$

Ch 100, 116, 140, 144 directional gain

$$= 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.91 \text{ dBi} > 6 \text{ dBi}, \text{ so limit} = 11 - (9.05 - 6) = 7.95 \text{ dBm/MHz}.$$

Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270 MHz	7.36	8.09	Complies
62	5310 MHz	4.79	8.09	Complies
102	5510 MHz	4.82	7.95	Complies
110	5550 MHz	7.17	7.95	Complies
134	5670 MHz	6.84	7.95	Complies
142	5710 MHz	6.91	7.95	Complies

Note: Ch 54, 62 directional gain

$$= 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.91 \text{ dBi} > 6 \text{ dBi, so limit} = 11 - (8.91 - 6) = 8.09 \text{ dBm/MHz.}$$

Ch 102, 110, 134, 142 directional gain

$$= 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.91 \text{ dBi} > 6 \text{ dBi, so limit} = 11 - (9.05 - 6) = 7.95 \text{ dBm/MHz.}$$

Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58	5290 MHz	-0.33	8.09	Complies
106	5530 MHz	-0.30	7.95	Complies
138	5690 MHz	3.94	7.95	Complies

Note: Ch 58 directional gain

$$= 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.91 \text{ dBi} > 6 \text{ dBi, so limit} = 11 - (8.91 - 6) = 8.09 \text{ dBm/MHz.}$$

Ch 106, 138 directional gain

$$= 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.91 \text{ dBi} > 6 \text{ dBi, so limit} = 11 - (9.05 - 6) = 7.95 \text{ dBm/MHz.}$$

Temperature	20°C	Humidity	62%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a
Test Date	Ch 144: Apr. 22, 2014 / Other Ch: Mar. 14, 2014		

Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	7.97	8.09	Complies
60	5300 MHz	7.70	8.09	Complies
64	5320 MHz	7.87	8.09	Complies
100	5500 MHz	7.54	7.95	Complies
116	5580 MHz	7.77	7.95	Complies
140	5700 MHz	7.55	7.95	Complies
144	5720 MHz	7.51	7.95	Complies

Note: Ch 52, 60, 64 directional gain

$$= 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.91 \text{ dBi} > 6 \text{ dBi}, \text{ so limit} = 11 - (8.91 - 6) = 8.09 \text{ dBm/MHz}.$$


Ch 100, 116, 140, 144 directional gain

$$= 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.91 \text{ dBi} > 6 \text{ dBi}, \text{ so limit} = 11 - (9.05 - 6) = 7.95 \text{ dBm/MHz}.$$


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 4 + Ant. 5 + Ant. 6 /
5260 MHz

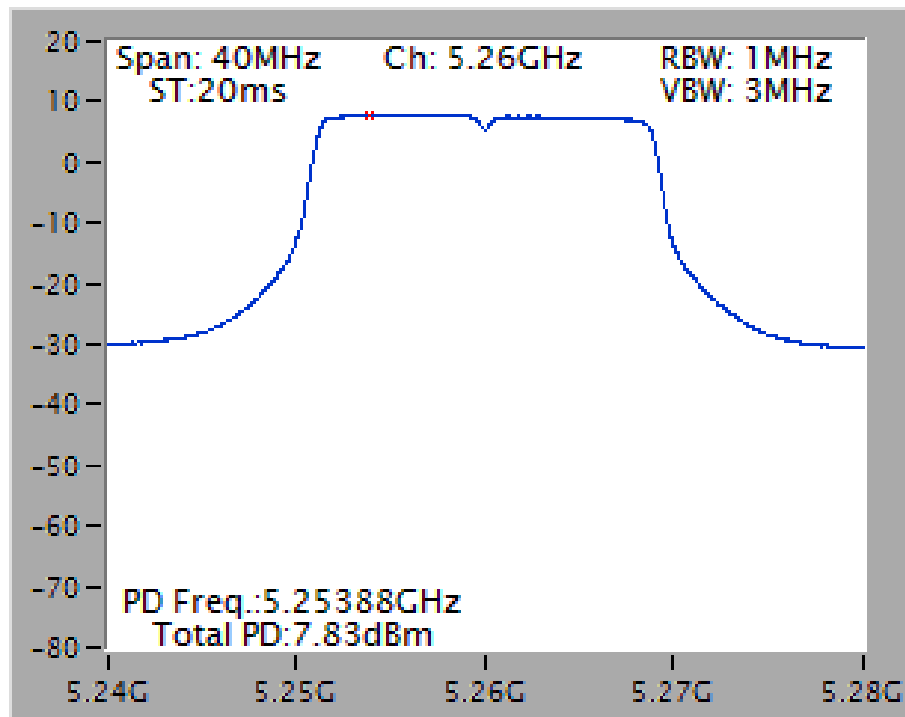


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 4 + Ant. 5 + Ant. 6 /
5700 MHz

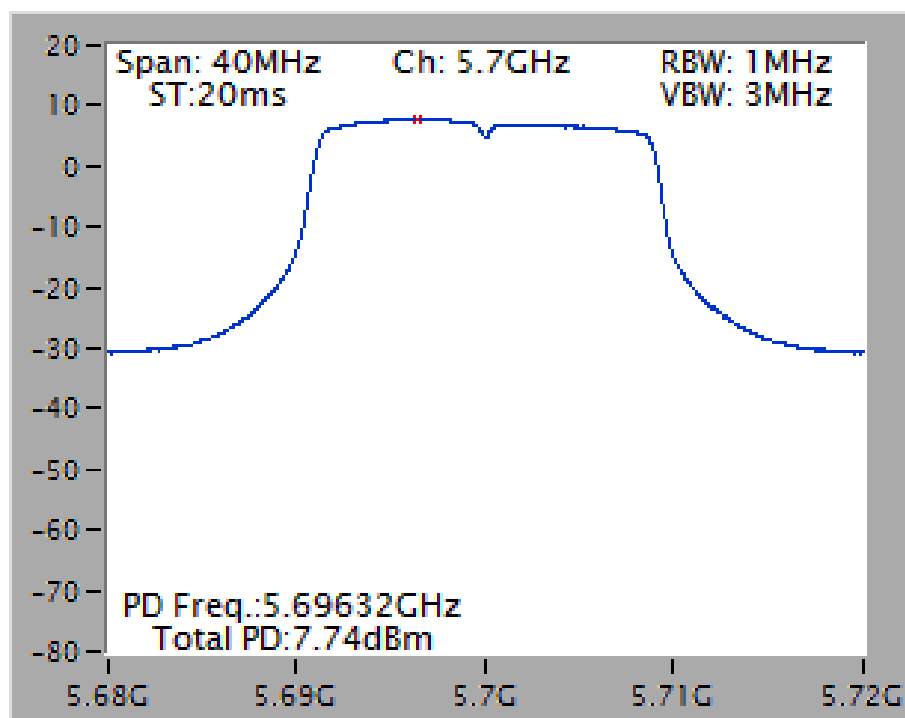


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 4 + Ant. 5 + Ant. 6 /
5720 MHz

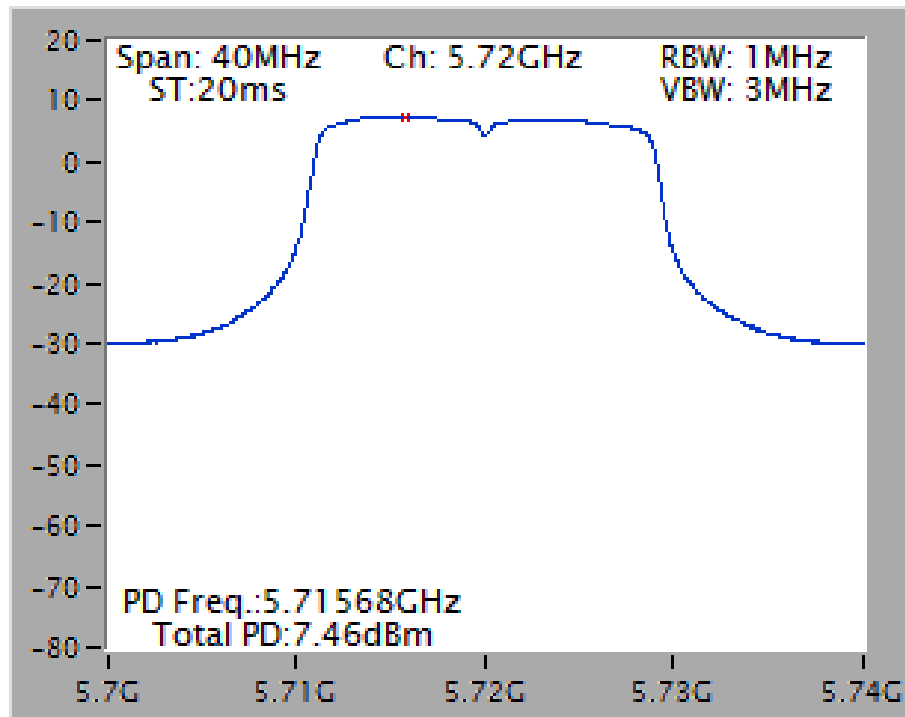


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 4 + Ant. 5 + Ant. 6 /
5270 MHz

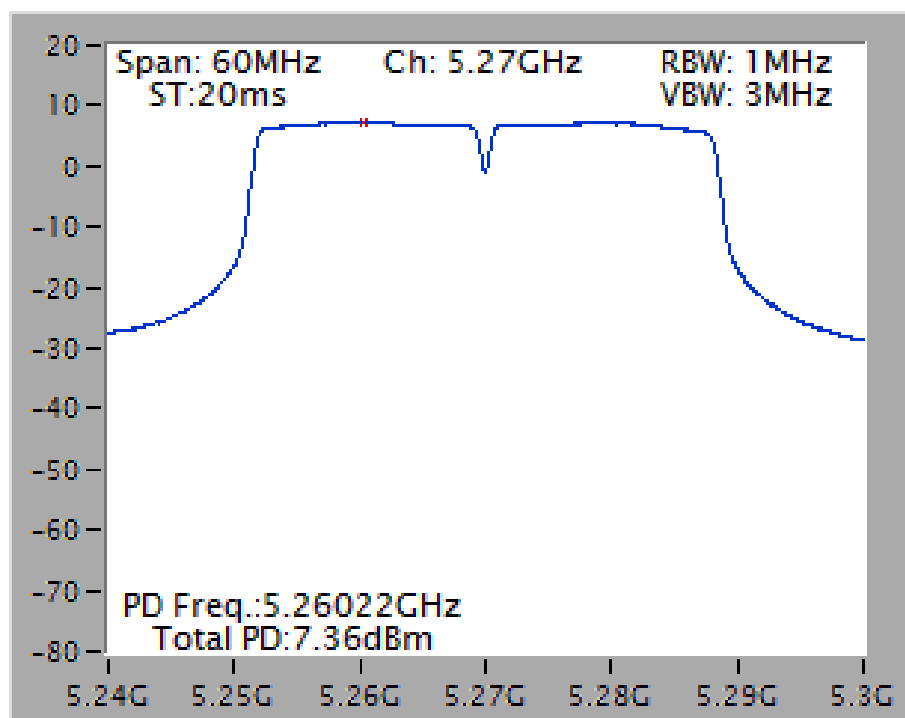


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 4 + Ant. 5 + Ant. 6 /
5550 MHz

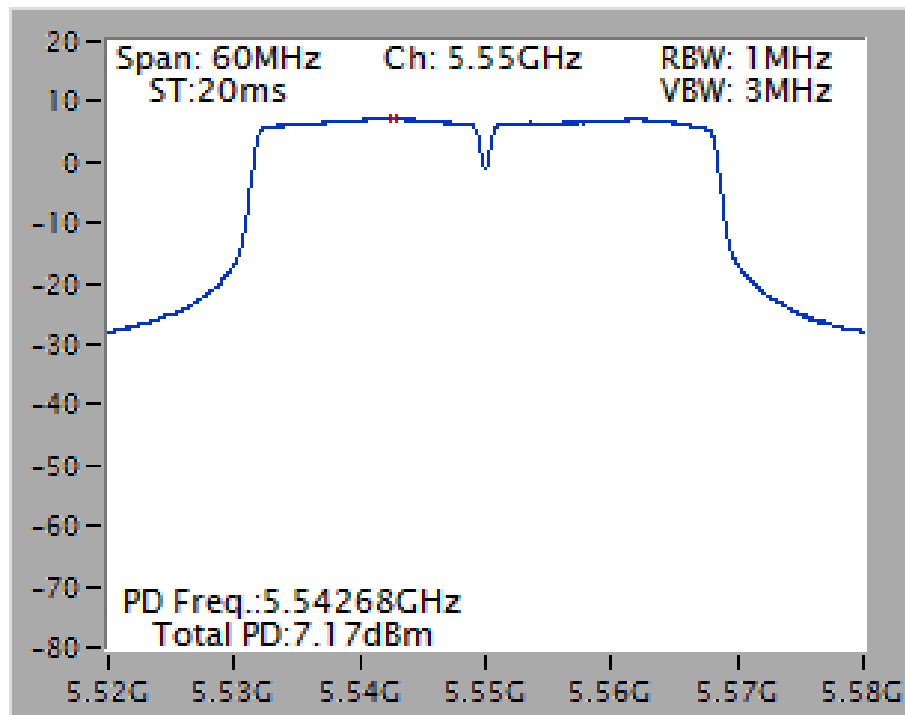


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 4 + Ant. 5 + Ant. 6 /
5710 MHz

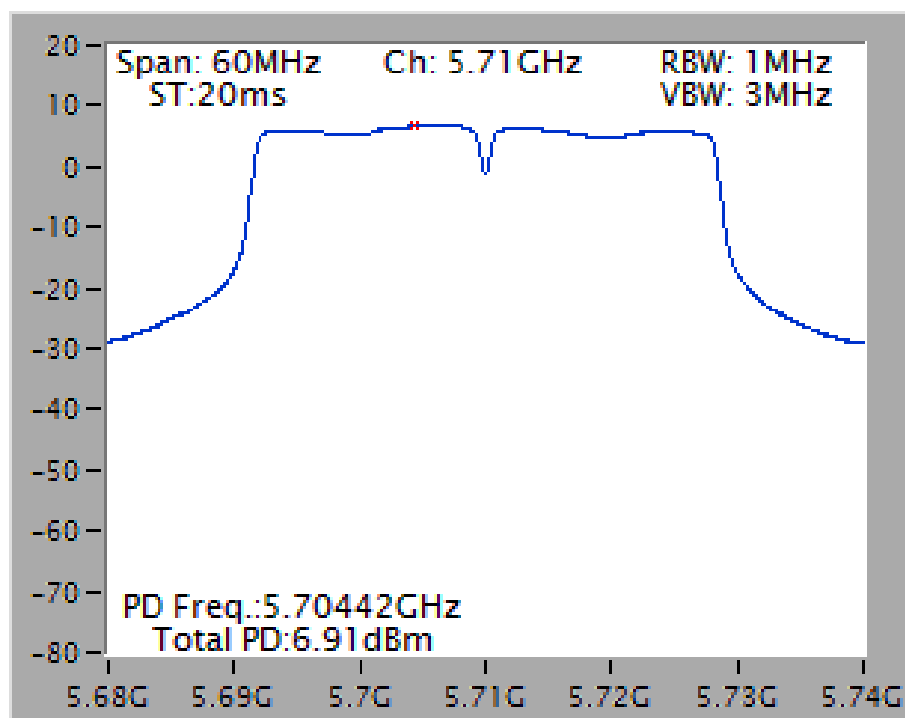


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 4 + Ant. 5 + Ant. 6 /
5290 MHz

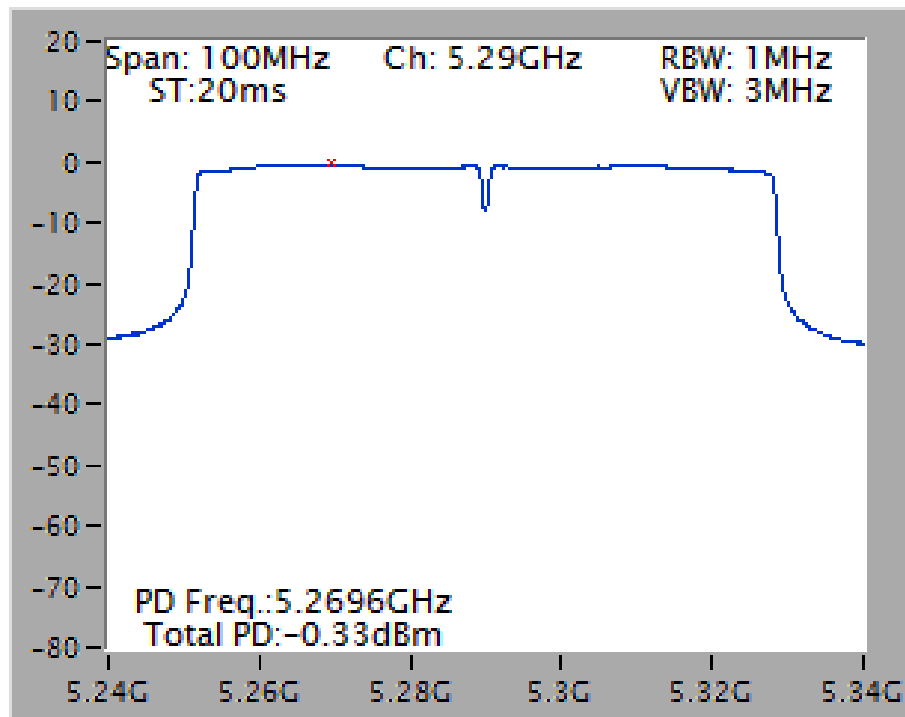


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 4 + Ant. 5 + Ant. 6 /
5530 MHz

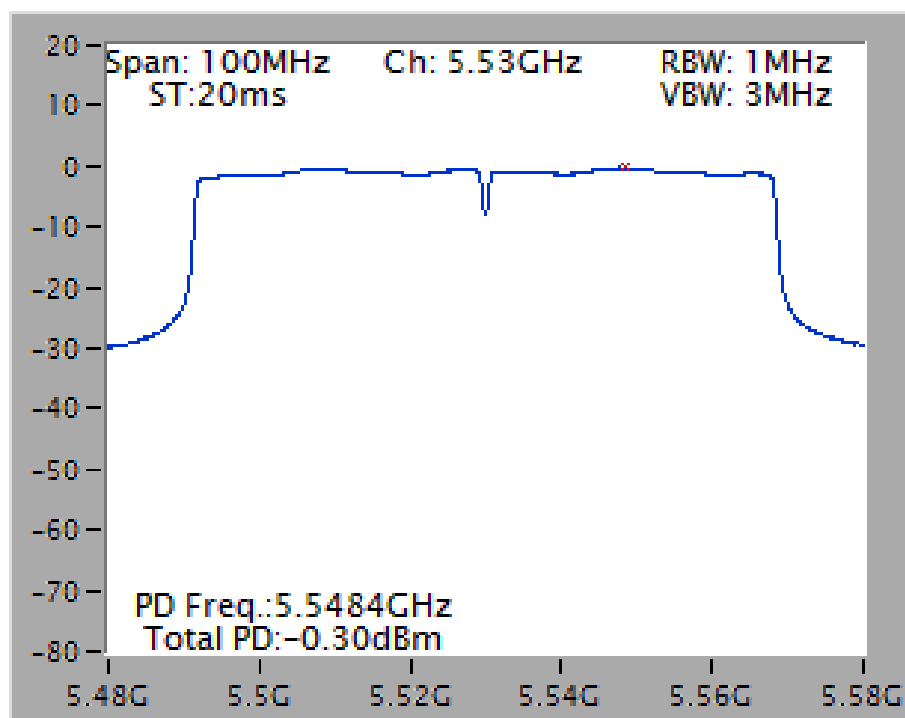


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 4 + Ant. 5 + Ant. 6 /
5690 MHz

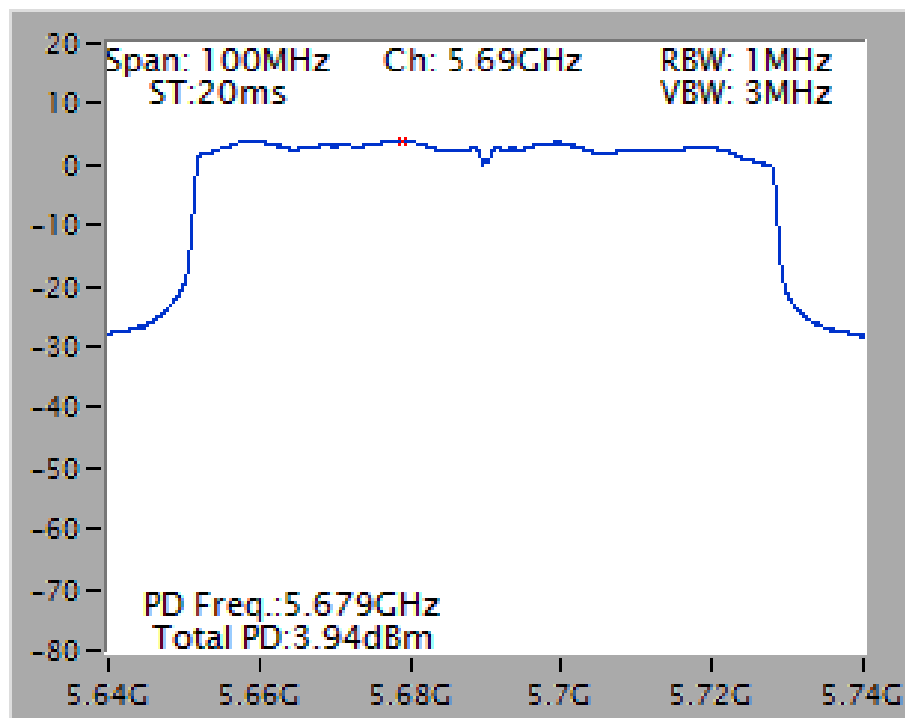


Power Density Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5260 MHz

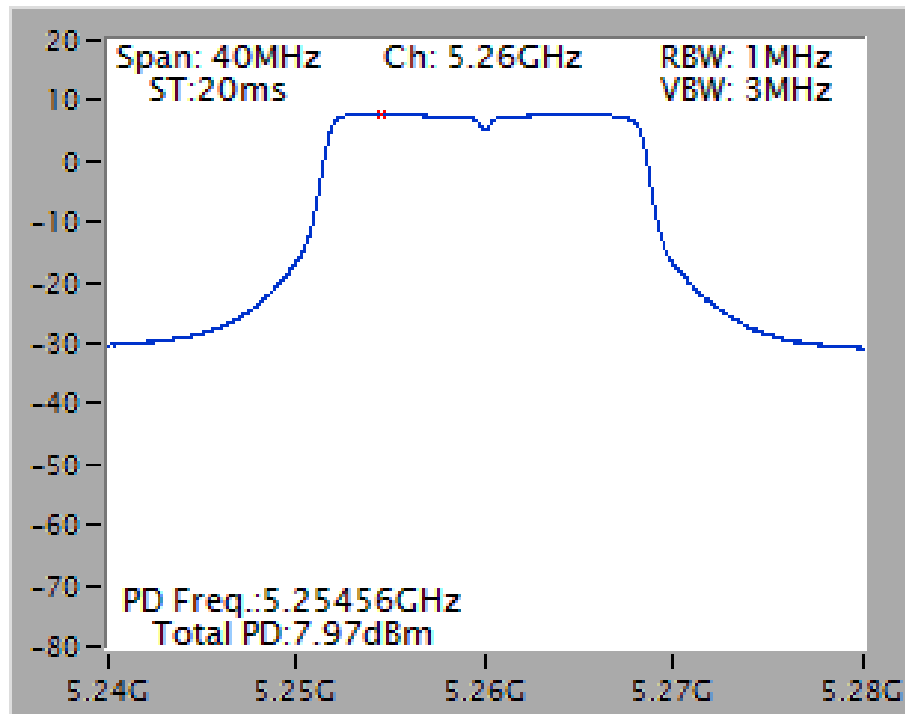

Power Density Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5580 MHz

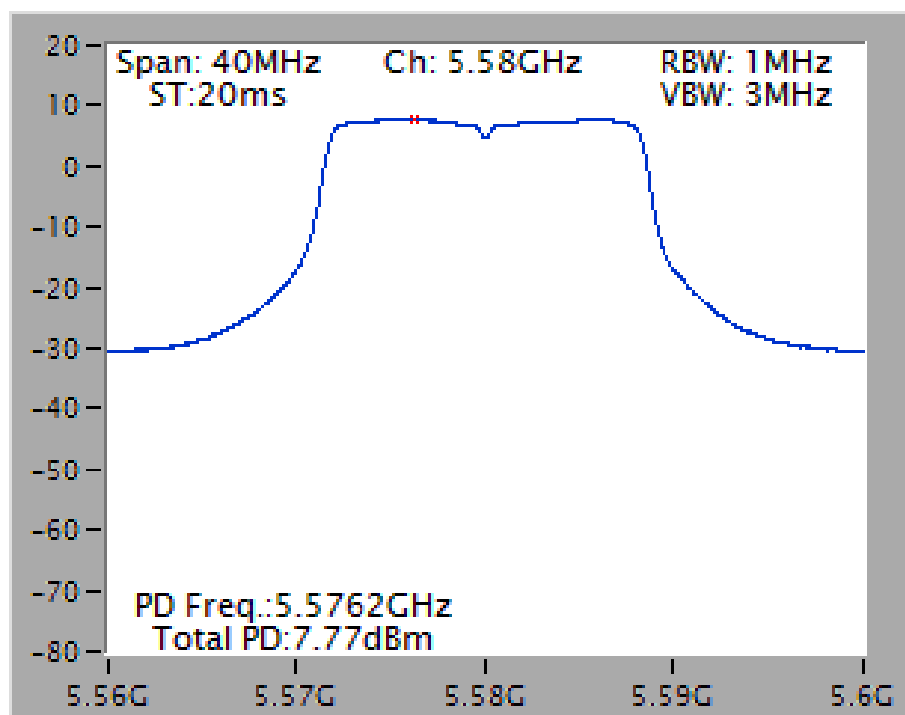

Power Density Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5720 MHz

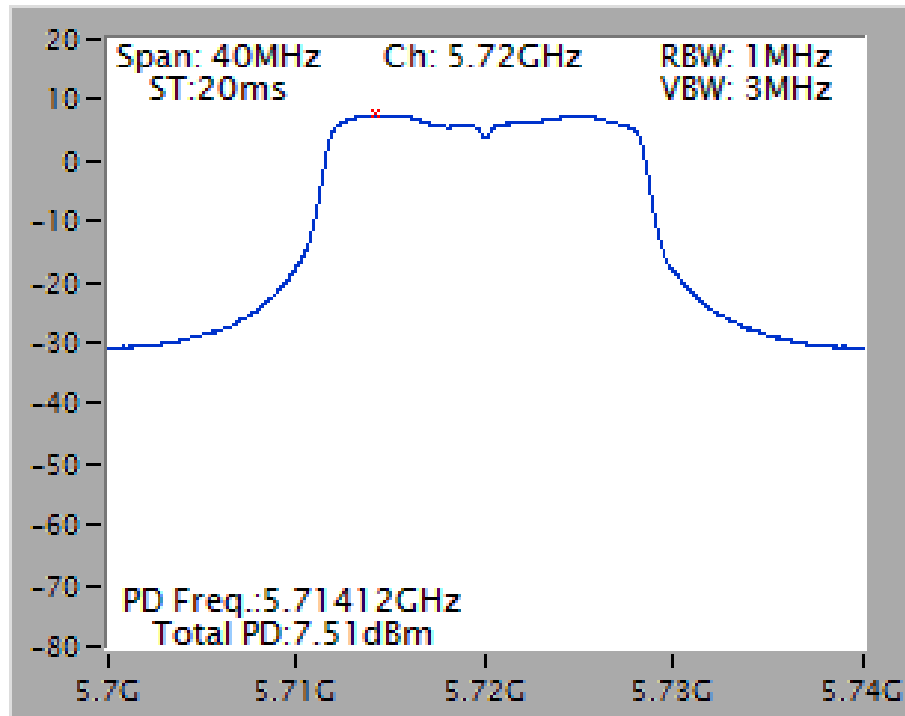

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (Peak Trace) / 1 MHz (Average Trace)
VBW	≥ 3 MHz (Peak Trace) / ≥ 3 MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Trace: Max hold (Peak Trace) / Trace Average Sweep Count 100 (Average Trace)
Sweep Time	AUTO

4.5.3. Test Procedures

1. Trace A, Set RBW = 1 MHz, VBW = 3 MHz, Span > 26 dB bandwidth, Max. hold.
2. Delta Mark trace A Maximum frequency and trace B same frequency.
3. Repeat the above procedure until measurements for all frequencies were complete.
4. Testing each modulation mode on a single channel in single operating band at single output port.
All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	20°C	Humidity	62%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac VHT20 / Ant. 4 + Ant. 5 + Ant. 6

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5260 MHz	8.58	13	Complies
QPSK (MCS1)	5260 MHz	9.09	13	Complies
16QAM (MCS3)	5260 MHz	9.17	13	Complies
64QAM (MCS5)	5260 MHz	9.59	13	Complies
256QAM (MCS8)	5260 MHz	10.24	13	Complies
BPSK (MCS0)	5700 MHz	8.74	13	Complies
QPSK (MCS1)	5700 MHz	9.11	13	Complies
16QAM (MCS3)	5700 MHz	9.31	13	Complies
64QAM (MCS5)	5700 MHz	9.02	13	Complies
256QAM (MCS8)	5700 MHz	9.59	13	Complies
BPSK (MCS0)	5720 MHz	8.79	13	Complies
QPSK (MCS1)	5720 MHz	9.22	13	Complies
16QAM (MCS3)	5720 MHz	9.25	13	Complies
64QAM (MCS5)	5720 MHz	8.74	13	Complies
256QAM (MCS8)	5720 MHz	9.38	13	Complies

Configuration IEEE 802.11ac VHT40 / Ant. 4 + Ant. 5 + Ant. 6

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5270 MHz	8.47	13	Complies
QPSK (MCS1)	5270 MHz	8.96	13	Complies
16QAM (MCS3)	5270 MHz	9.96	13	Complies
64QAM (MCS5)	5270 MHz	8.80	13	Complies
256QAM (MCS8)	5270 MHz	9.80	13	Complies
BPSK (MCS0)	5670 MHz	8.85	13	Complies
QPSK (MCS1)	5670 MHz	8.54	13	Complies
16QAM (MCS3)	5670 MHz	9.77	13	Complies
64QAM (MCS5)	5670 MHz	9.75	13	Complies
256QAM (MCS8)	5670 MHz	9.39	13	Complies
BPSK (MCS0)	5710 MHz	8.97	13	Complies
QPSK (MCS1)	5710 MHz	8.72	13	Complies
16QAM (MCS3)	5710 MHz	9.57	13	Complies
64QAM (MCS5)	5710 MHz	8.69	13	Complies
256QAM (MCS8)	5710 MHz	9.32	13	Complies

Configuration IEEE 802.11ac VHT80 / Ant. 4 + Ant. 5 + Ant. 6

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5290 MHz	8.73	13	Complies
QPSK (MCS1)	5290 MHz	9.85	13	Complies
16QAM (MCS3)	5290 MHz	9.68	13	Complies
64QAM (MCS5)	5290 MHz	9.26	13	Complies
256QAM (MCS8)	5290 MHz	9.15	13	Complies
BPSK (MCS0)	5530 MHz	8.89	13	Complies
QPSK (MCS1)	5530 MHz	8.40	13	Complies
16QAM (MCS3)	5530 MHz	9.92	13	Complies
64QAM (MCS5)	5530 MHz	9.37	13	Complies
256QAM (MCS8)	5530 MHz	9.25	13	Complies
BPSK (MCS0)	5690 MHz	9.26	13	Complies
QPSK (MCS1)	5690 MHz	9.98	13	Complies
16QAM (MCS3)	5690 MHz	9.01	13	Complies
64QAM (MCS5)	5690 MHz	9.67	13	Complies
256QAM (MCS8)	5690 MHz	9.43	13	Complies

Temperature	20°C	Humidity	62%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a


Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (6Mbps)	5260 MHz	8.58	13	Complies
QPSK (12Mbps)	5260 MHz	8.39	13	Complies
16QAM (24Mbps)	5260 MHz	9.53	13	Complies
64QAM (48Mbps)	5260 MHz	9.19	13	Complies
BPSK (6Mbps)	5580 MHz	9.40	13	Complies
QPSK (12Mbps)	5580 MHz	8.71	13	Complies
16QAM (24Mbps)	5580 MHz	9.27	13	Complies
64QAM (48Mbps)	5580 MHz	9.20	13	Complies
BPSK (6Mbps)	5720 MHz	9.62	13	Complies
QPSK (12Mbps)	5720 MHz	9.24	13	Complies
16QAM (24Mbps)	5720 MHz	9.07	13	Complies
64QAM (48Mbps)	5720 MHz	10.39	13	Complies

Note: All the test values were listed in the report.


For plots, only the modulation with worse result was shown.

Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 4 + Ant. 5 + Ant. 6 / 256QAM (MCS8) / 5260 MHz

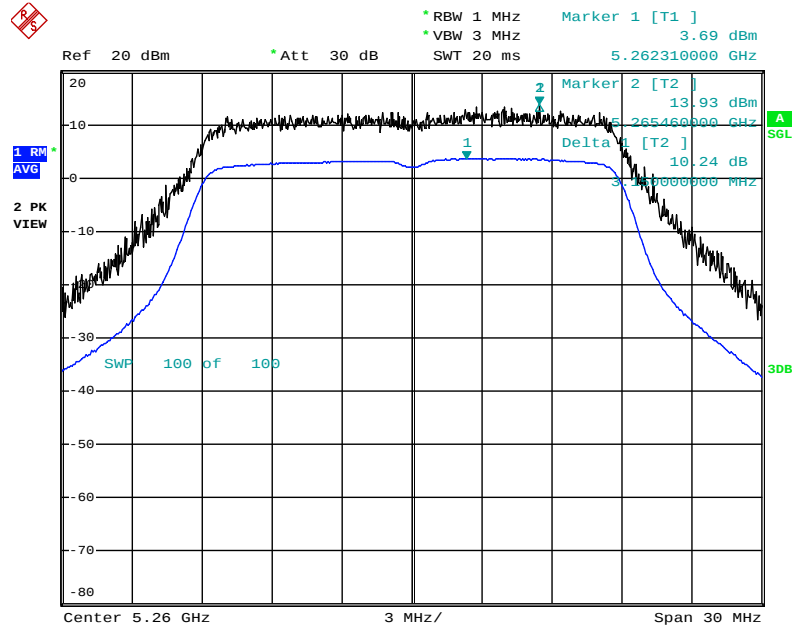


Date: 14.MAR.2014 17:18:06

Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 4 + Ant. 5 + Ant. 6 / 256QAM (MCS8) / 5700 MHz

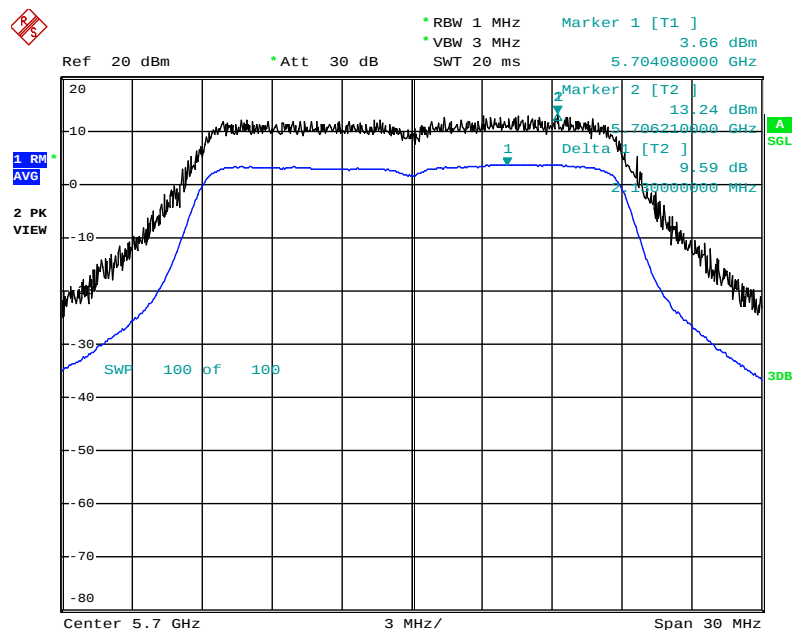


Date: 14.MAR.2014 17:24:04

Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 4 + Ant. 5 + Ant. 6 / 256QAM (MCS8) / 5720 MHz

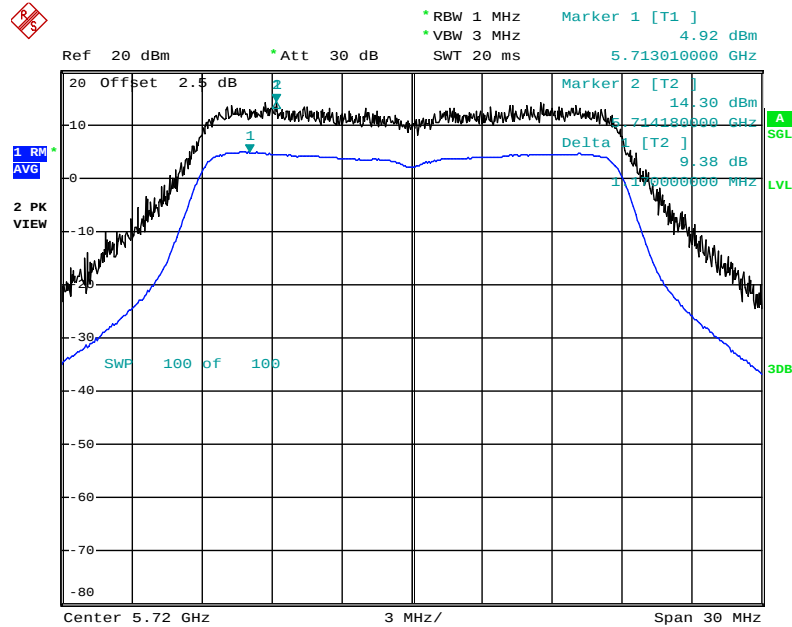


Date: 22.APR.2014 21:28:13

Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 4 + Ant. 5 + Ant. 6 / 16QAM (MCS3) / 5270 MHz

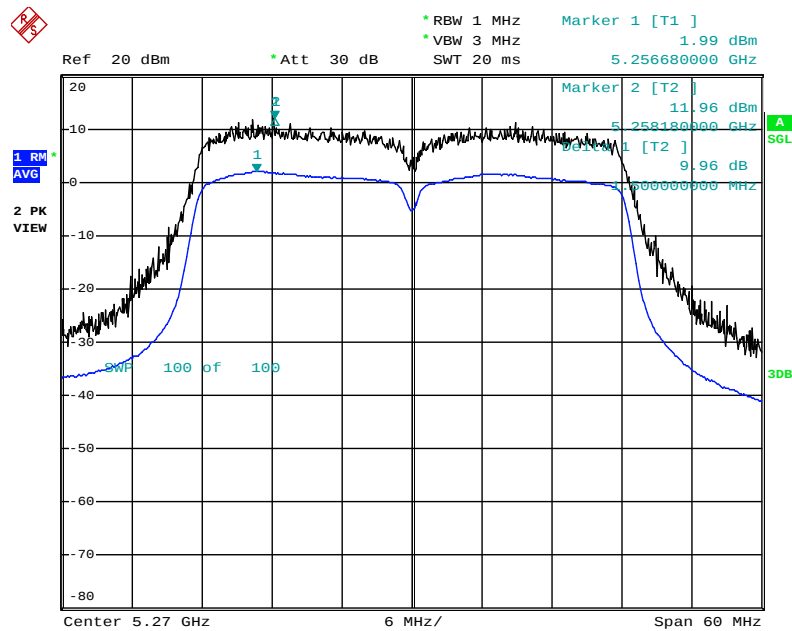


Date: 14.MAR.2014 17:37:09

Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 4 + Ant. 5 + Ant. 6 / 16QAM (MCS3) / 5670 MHz

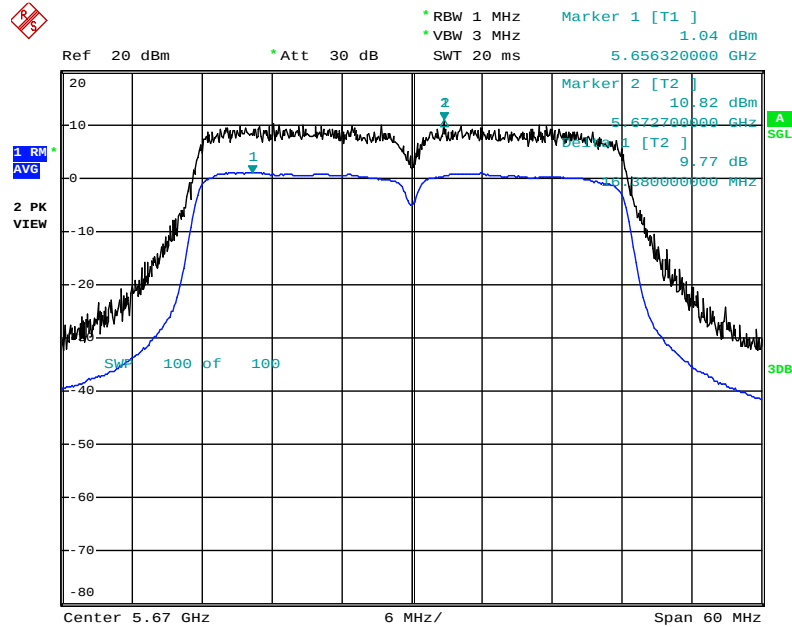


Date: 14.MAR.2014 17:43:22

Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 4 + Ant. 5 + Ant. 6 / 16QAM (MCS3) / 5710 MHz

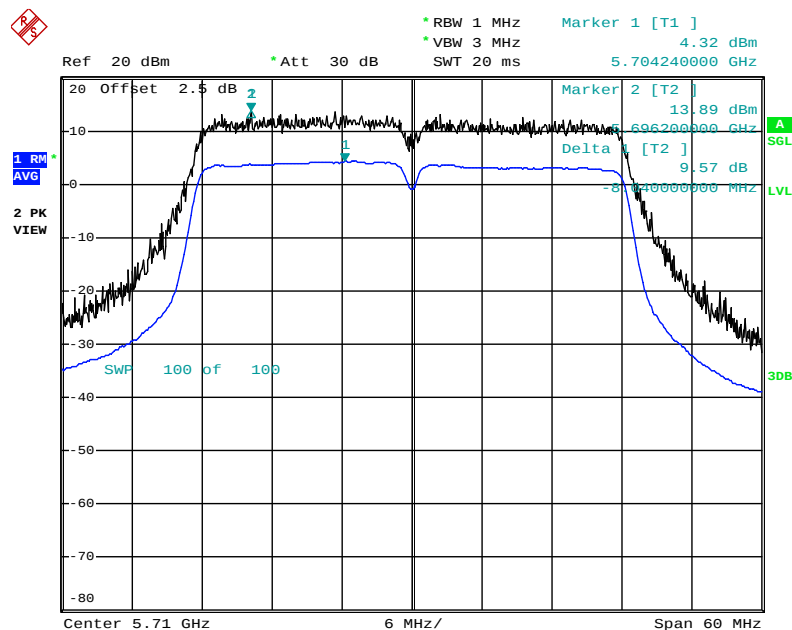


Date: 22.APR.2014 21:31:28

Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 4 + Ant. 5 + Ant. 6 / QPSK (MCS1) / 5290 MHz

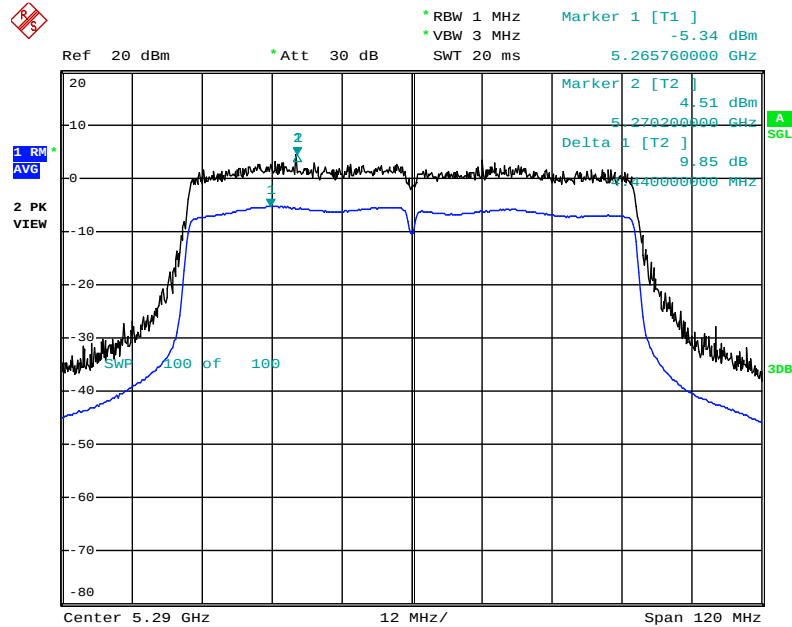


Date: 14.MAR.2014 17:49:11

Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 4 + Ant. 5 + Ant. 6 / 16QAM (MCS3) / 5530 MHz

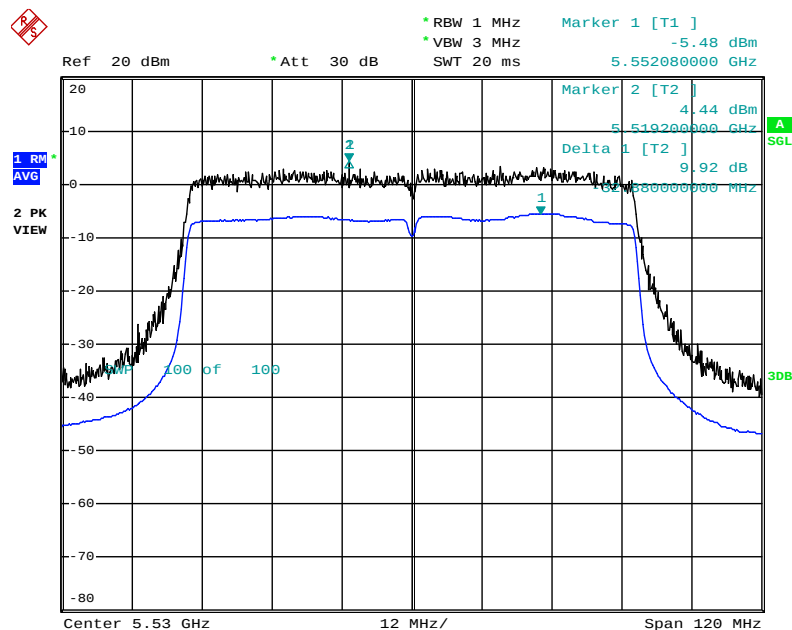


Date: 14.MAR.2014 18:02:03

Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 4 + Ant. 5 + Ant. 6 / QPSK (MCS1) / 5690 MHz

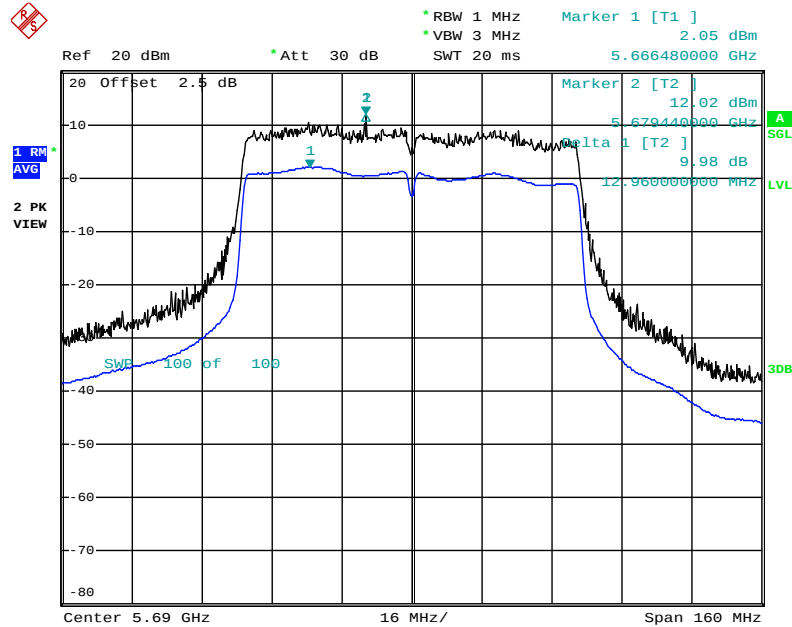


Date: 22.APR.2014 21:35:16

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 16QAM (24Mbps) / 5260 MHz

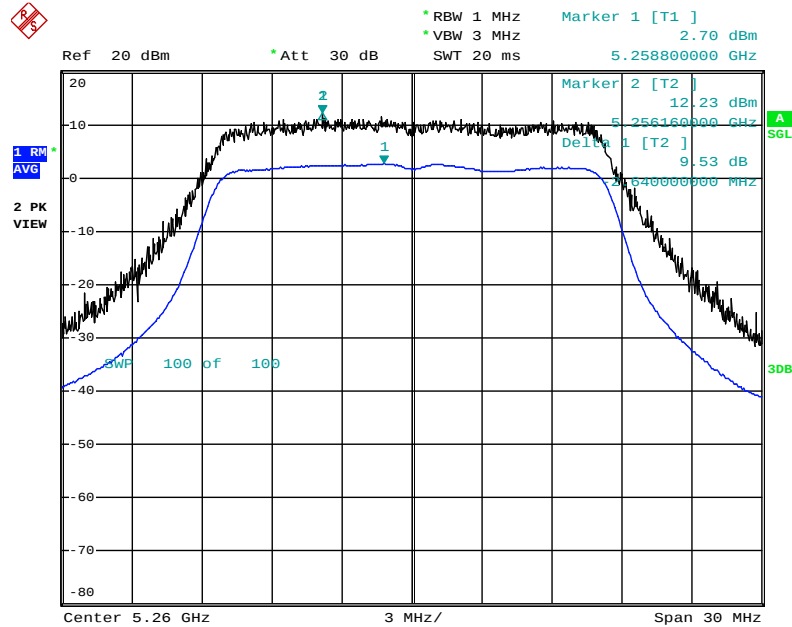


Date: 14.MAR.2014 17:01:16

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / BPSK (6Mbps) / 5580 MHz

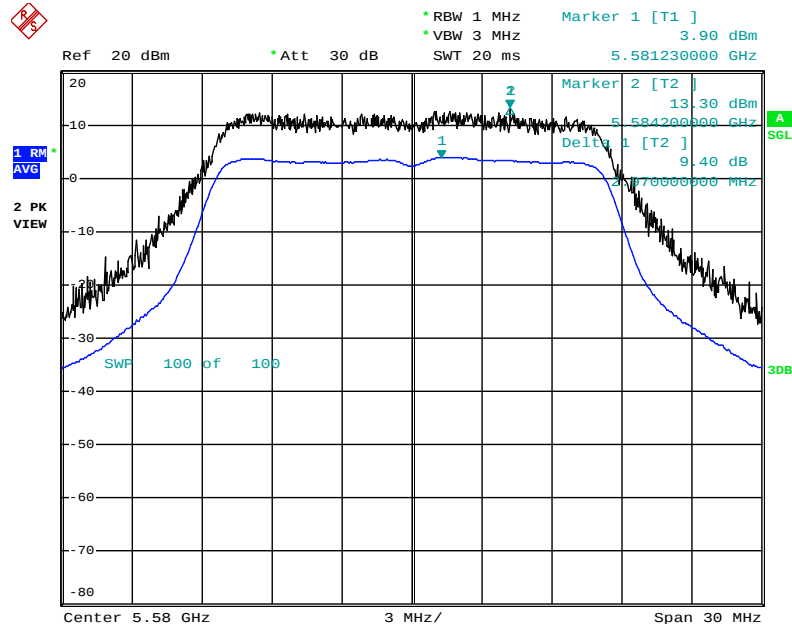

Date: 14.MAR.2014 17:10:06

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 64QAM (48Mbps) / 5720 MHz

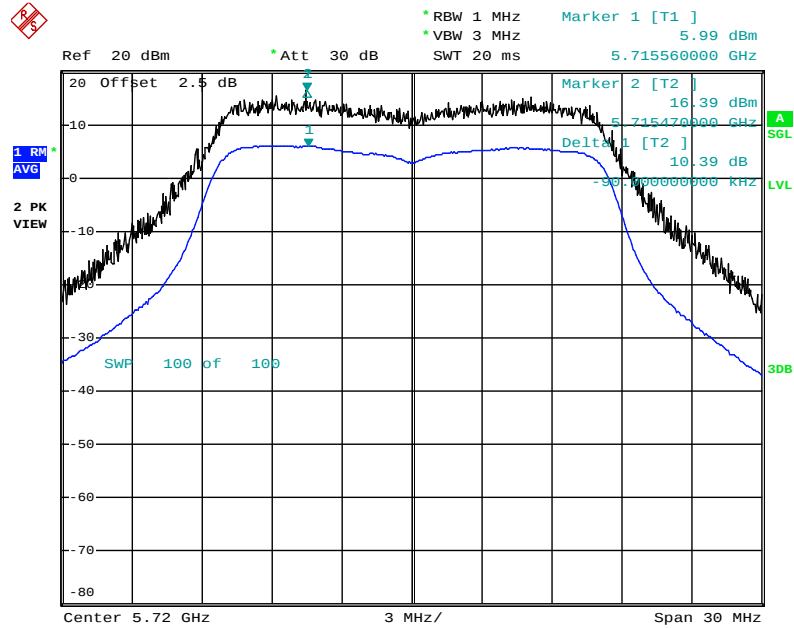

Date: 22.APR.2014 21:23:23

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1 000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

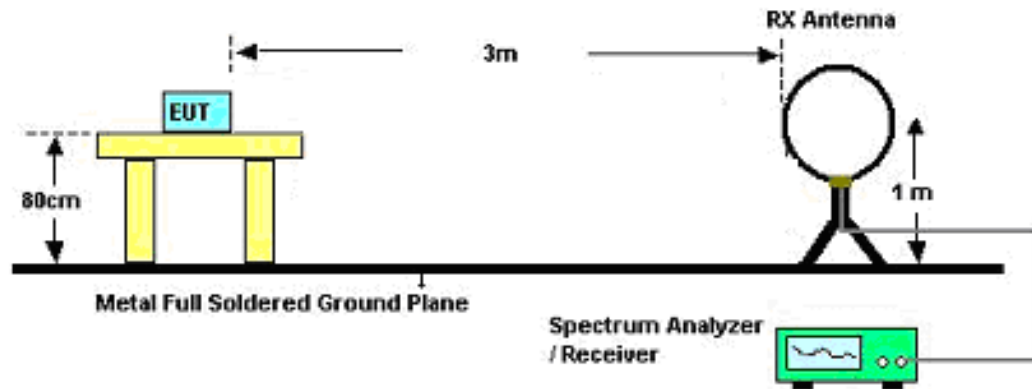

For Radiated Emissions: 30MHz~1GHz

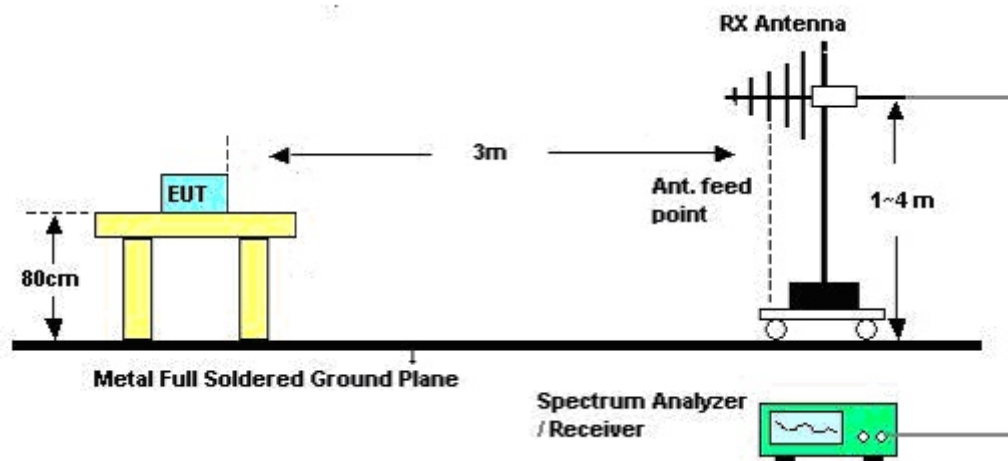

For Radiated Emissions: Above 1GHz

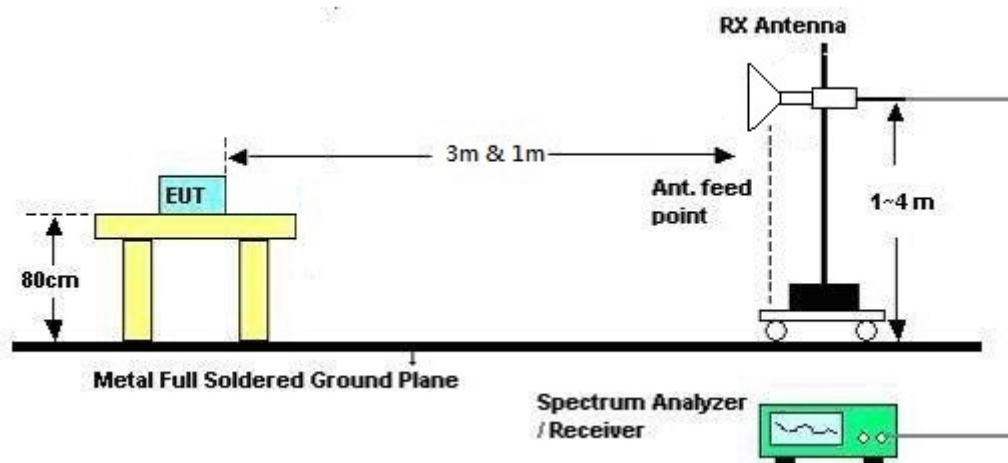

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	CTX
Test Date	Mar. 14, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	CTX

Horizontal

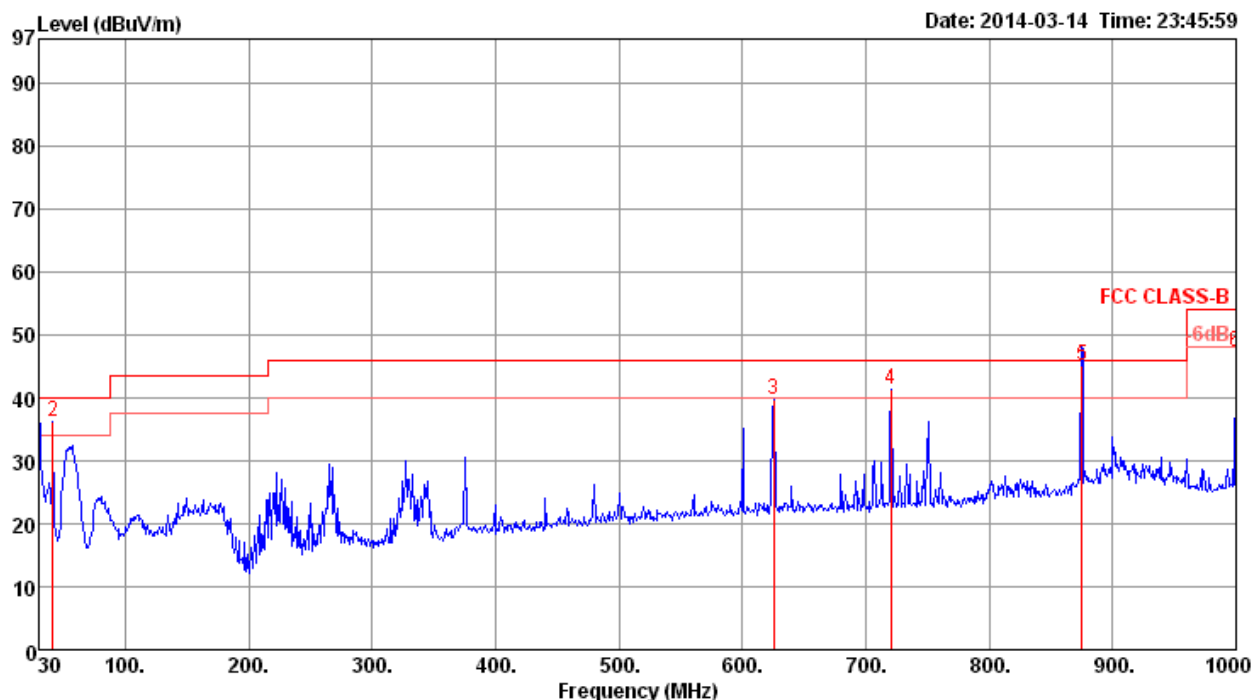

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	30.00	36.10	40.00	-3.90	44.53	0.61	18.76	27.80	Peak	400	0	HORIZONTAL
2	41.64	36.33	40.00	-3.67	51.45	0.69	11.99	27.80	Peak	400	0	HORIZONTAL
3	625.58	39.62	46.00	-6.38	45.94	2.90	18.85	28.07	Peak	400	0	HORIZONTAL
4	720.64	41.33	46.00	-4.67	46.87	3.14	19.23	27.91	Peak	400	0	HORIZONTAL
5	874.87	45.11	46.00	-0.89	48.76	3.46	20.34	27.45	QP	100	50	HORIZONTAL
6	1000.00	47.28	54.00	-6.72	49.29	3.70	21.29	27.00	Peak	400	0	HORIZONTAL

Vertical

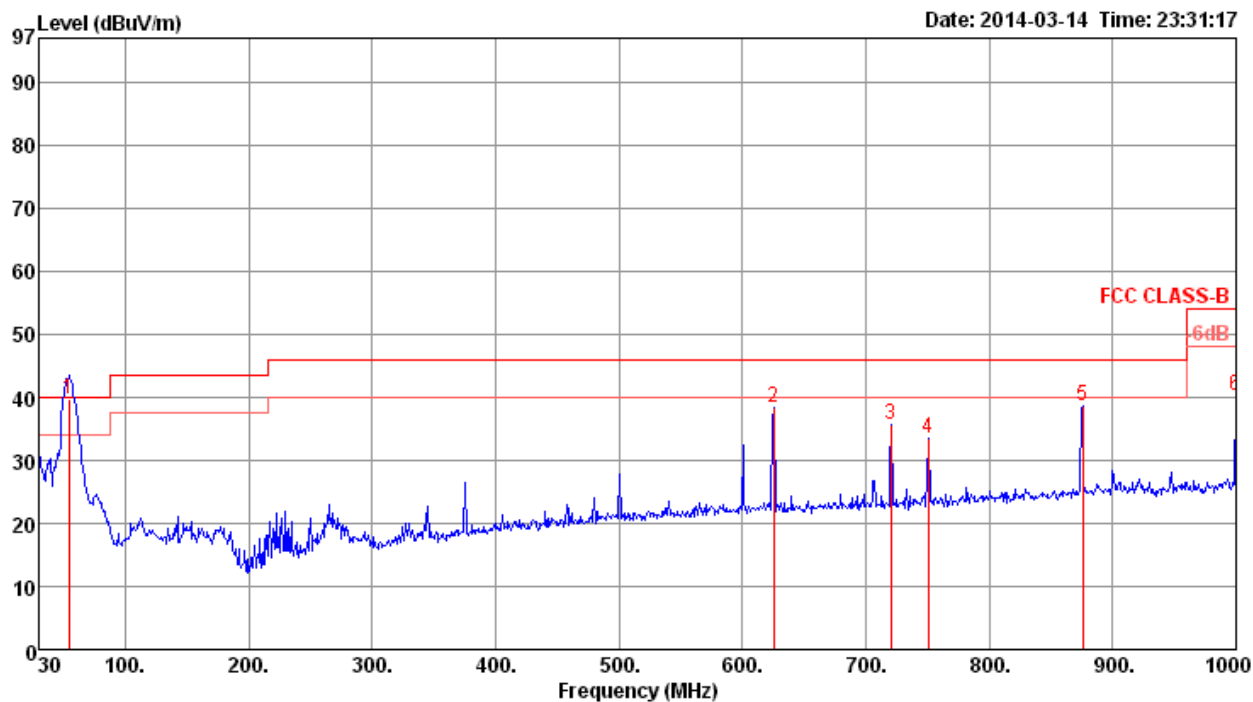

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	
1	54.25	39.72	40.00	-0.28	58.82	0.85	7.83	27.78	QP	100	360	VERTICAL
2	625.58	38.41	46.00	-7.59	44.73	2.90	18.85	28.07	Peak	400	0	VERTICAL
3	720.64	35.79	46.00	-10.21	41.33	3.14	19.23	27.91	Peak	400	0	VERTICAL
4	750.71	33.47	46.00	-12.53	38.64	3.20	19.43	27.80	Peak	400	0	VERTICAL
5	875.84	38.51	46.00	-7.49	42.15	3.46	20.35	27.45	Peak	400	0	VERTICAL
6	1000.00	40.16	54.00	-13.84	42.17	3.70	21.29	27.00	Peak	400	0	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 52 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	Pol/Phase
1	15783.02	56.23	74.00	-17.77	44.76	7.94	34.94	11.47	Peak	331	112	HORIZONTAL
2	15784.02	43.71	54.00	-10.29	32.24	7.94	34.94	11.47	Average	331	112	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	Pol/Phase
1	15781.86	56.27	74.00	-17.73	44.80	7.94	34.94	11.47	Peak	64	114	VERTICAL
2	15782.16	44.52	54.00	-9.48	33.05	7.94	34.94	11.47	Average	64	114	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 60 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10595.68	39.56	54.00	-14.44	29.57	6.61	35.00	9.99	Average	74	100	HORIZONTAL
2	10601.60	51.63	74.00	-22.37	41.64	6.60	34.99	9.99	Peak	74	100	HORIZONTAL
3	15902.72	54.99	74.00	-19.01	43.67	7.98	35.03	11.32	Peak	302	100	HORIZONTAL
4	15904.02	42.37	54.00	-11.63	31.05	7.98	35.03	11.32	Average	302	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10600.76	41.10	54.00	-12.90	31.11	6.60	34.99	9.99	Average	331	100	VERTICAL
2	10601.22	54.76	74.00	-19.24	44.77	6.60	34.99	9.99	Peak	331	100	VERTICAL
3	15900.04	42.49	54.00	-11.51	31.17	7.97	35.03	11.32	Average	230	100	VERTICAL
4	15901.30	55.14	74.00	-18.86	43.82	7.98	35.03	11.32	Peak	230	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 64 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10638.64	51.58	74.00	-22.42	41.59	6.59	34.97	9.99	Peak	230	100	HORIZONTAL
2	10641.40	39.17	54.00	-14.83	29.18	6.59	34.97	9.99	Average	230	100	HORIZONTAL
3	15955.34	55.22	74.00	-18.78	43.97	8.00	35.08	11.25	Peak	148	100	HORIZONTAL
4	15958.96	41.84	54.00	-12.16	30.61	8.00	35.10	11.23	Average	148	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10638.32	39.20	54.00	-14.80	29.21	6.59	34.97	9.99	Average	328	100	VERTICAL
2	10641.32	52.64	74.00	-21.36	42.65	6.59	34.97	9.99	Peak	328	100	VERTICAL
3	15959.04	41.98	54.00	-12.02	30.75	8.00	35.10	11.23	Average	216	100	VERTICAL
4	15962.02	54.65	74.00	-19.35	43.42	8.00	35.10	11.23	Peak	216	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 100 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10999.92	51.33	74.00	-22.67	41.28	6.46	34.71	10.05	Peak	92	100	HORIZONTAL
2	11001.34	39.24	54.00	-14.76	29.19	6.46	34.71	10.05	Average	92	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11002.42	39.39	54.00	-14.61	29.34	6.46	34.71	10.05	Average	23	100	VERTICAL
2	11002.98	51.78	74.00	-22.22	41.73	6.46	34.71	10.05	Peak	23	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 116 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11159.92	52.94	74.00	-21.06	42.77	6.56	34.69	10.17	Peak	66	100	HORIZONTAL
2	11161.68	39.62	54.00	-14.38	29.45	6.56	34.69	10.17	Average	66	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11159.02	43.53	54.00	-10.47	33.36	6.56	34.69	10.17	Average	188	100	VERTICAL
2	11159.10	55.92	74.00	-18.08	45.75	6.56	34.69	10.17	Peak	188	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 140 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11399.44	38.57	54.00	-15.43	28.25	6.69	34.67	10.32	Average	218	100	HORIZONTAL
2	11399.90	51.54	74.00	-22.46	41.22	6.69	34.67	10.32	Peak	218	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11400.04	39.14	54.00	-14.86	28.82	6.69	34.67	10.32	Average	106	100	VERTICAL
2	11402.84	51.50	74.00	-22.50	41.18	6.69	34.67	10.32	Peak	106	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 144 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Apr. 16, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11413.33	52.42	74.00	-21.58	42.09	6.70	38.30	34.67	Peak	265	100 HORIZONTAL
2	11425.99	39.07	54.00	-14.93	28.74	6.70	38.30	34.67	Average	265	100 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11414.46	51.61	74.00	-22.39	41.28	6.70	38.30	34.67	Peak	133	100 VERTICAL
2	11428.72	40.18	54.00	-13.82	29.85	6.70	38.30	34.67	Average	133	100 VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 54 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	15811.96	55.12	74.00	-18.88	43.69	7.95	34.97	11.43	Peak	359	100	HORIZONTAL
2	15814.80	42.33	54.00	-11.67	30.90	7.95	34.97	11.43	Average	359	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	15806.94	42.60	54.00	-11.40	31.17	7.95	34.97	11.43	Average	280	100	VERTICAL
2	15815.00	55.12	74.00	-18.88	43.69	7.95	34.97	11.43	Peak	280	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 62 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10618.22	52.17	74.00	-21.83	42.18	6.60	34.99	9.99	Peak	79	100	HORIZONTAL
2	10618.38	39.36	54.00	-14.64	29.37	6.60	34.99	9.99	Average	79	100	HORIZONTAL
3	15925.20	56.19	74.00	-17.81	44.89	7.99	35.05	11.30	Peak	294	100	HORIZONTAL
4	15932.06	42.32	54.00	-11.68	31.05	7.99	35.08	11.27	Average	294	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10622.48	39.08	54.00	-14.92	29.09	6.60	34.99	9.99	Average	177	100	VERTICAL
2	10624.38	51.48	74.00	-22.52	41.49	6.60	34.99	9.99	Peak	177	100	VERTICAL
3	15929.62	42.52	54.00	-11.48	31.22	7.99	35.05	11.30	Average	252	100	VERTICAL
4	15931.68	54.91	74.00	-19.09	43.64	7.99	35.08	11.27	Peak	252	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 102 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	11019.92	51.26	74.00	-22.74	41.20	6.47	34.71	10.06	Peak	190	100	HORIZONTAL
2	11022.04	38.75	54.00	-15.25	28.68	6.48	34.71	10.07	Average	190	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	11019.74	51.66	74.00	-22.34	41.60	6.47	34.71	10.06	Peak	348	100	VERTICAL
2	11021.26	38.64	54.00	-15.36	28.58	6.47	34.71	10.06	Average	348	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 110 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11095.62	51.72	74.00	-22.28	41.60	6.52	34.70	10.12	Peak	115	100	HORIZONTAL
2	11100.22	42.54	54.00	-11.46	32.42	6.52	34.70	10.12	Average	115	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11095.26	52.41	74.00	-21.59	42.29	6.52	34.70	10.12	Peak	63	100	VERTICAL
2	11101.66	43.00	54.00	-11.00	32.88	6.52	34.70	10.12	Average	63	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 134 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 12, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11343.98	51.64	74.00	-22.36	41.36	6.65	34.67	10.28	Peak	36	100	HORIZONTAL
2	11344.32	38.64	54.00	-15.36	28.36	6.65	34.67	10.28	Average	36	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11338.10	51.20	74.00	-22.80	40.93	6.65	34.68	10.27	Peak	45	100	VERTICAL
2	11343.14	38.98	54.00	-15.02	28.70	6.65	34.67	10.28	Average	45	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 142 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Apr. 16, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11415.54	51.55	74.00	-22.45	41.22	6.70	38.30	34.67 Peak	186	100	HORIZONTAL
2	11426.79	39.05	54.00	-14.95	28.72	6.70	38.30	34.67 Average	187	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11425.87	51.56	74.00	-22.44	41.23	6.70	38.30	34.67 Peak	265	100	VERTICAL
2	11429.01	39.31	54.00	-14.69	28.98	6.70	38.30	34.67 Average	265	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 58 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15862.72	42.88	54.00	-11.12	31.52	7.96	35.01	11.36	Average	147	100	HORIZONTAL
2	15872.50	56.15	74.00	-17.85	44.79	7.97	35.01	11.36	Peak	147	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15871.46	55.87	74.00	-18.13	44.51	7.97	35.01	11.36	Peak	201	100	VERTICAL
2	15874.50	42.68	54.00	-11.32	31.32	7.97	35.01	11.36	Average	201	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 106 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11060.84	38.86	54.00	-15.14	28.76	6.50	34.70	10.10	Average	93	100	HORIZONTAL
2	11061.24	51.72	74.00	-22.28	41.62	6.50	34.70	10.10	Peak	93	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11050.28	52.15	74.00	-21.85	42.06	6.49	34.70	10.09	Peak	155	100	VERTICAL
2	11052.72	38.95	54.00	-15.05	28.86	6.49	34.70	10.09	Average	155	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 138 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Apr. 16, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11348.59	52.00	74.00	-22.00	41.71	6.66	38.30	34.67	87	100	HORIZONTAL
2	11425.51	39.07	54.00	-14.93	28.74	6.70	38.30	34.67	87	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11367.98	39.70	54.00	-14.30	29.40	6.67	38.30	34.67	254	100	VERTICAL
2	11385.61	51.96	74.00	-22.04	41.65	6.68	38.30	34.67	254	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 52 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamplifier Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15776.06	42.37	54.00	-11.63	30.88	7.93	34.92	11.49	Average	312	100	HORIZONTAL
2	15777.02	55.16	74.00	-18.84	43.67	7.93	34.92	11.49	Peak	312	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamplifier Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15776.82	43.23	54.00	-10.77	31.74	7.93	34.92	11.49	Average	134	100	VERTICAL
2	15784.64	54.85	74.00	-19.15	43.38	7.94	34.94	11.47	Peak	134	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 60 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	10600.88	52.84	74.00	-21.16	42.85	6.60	34.99	9.99	Peak	186	100	HORIZONTAL
2	10604.96	41.55	54.00	-12.45	31.56	6.60	34.99	9.99	Average	186	100	HORIZONTAL
3	15903.00	54.83	74.00	-19.17	43.51	7.98	35.03	11.32	Peak	139	100	HORIZONTAL
4	15903.12	42.07	54.00	-11.93	30.75	7.98	35.03	11.32	Average	139	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	10600.62	41.26	54.00	-12.74	31.28	6.60	35.00	9.98	Average	3	100	VERTICAL
2	10604.96	53.47	74.00	-20.53	43.48	6.60	34.99	9.99	Peak	3	100	VERTICAL
3	15900.48	42.44	54.00	-11.56	31.12	7.97	35.03	11.32	Average	52	100	VERTICAL
4	15903.42	54.07	74.00	-19.93	42.75	7.98	35.03	11.32	Peak	52	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 64 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamplifier Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10640.86	39.27	54.00	-14.73	29.28	6.59	34.97	9.99	Average	112	100	HORIZONTAL
2	10642.10	51.60	74.00	-22.40	41.61	6.59	34.97	9.99	Peak	112	100	HORIZONTAL
3	15958.78	42.47	54.00	-11.53	31.24	8.00	35.10	11.23	Average	159	100	HORIZONTAL
4	15964.66	54.86	74.00	-19.14	43.63	8.00	35.10	11.23	Peak	159	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamplifier Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10638.18	42.10	54.00	-11.90	32.11	6.59	34.97	9.99	Average	360	100	VERTICAL
2	10642.52	52.93	74.00	-21.07	42.94	6.59	34.97	9.99	Peak	360	100	VERTICAL
3	15955.10	54.22	74.00	-19.78	42.97	8.00	35.08	11.25	Peak	268	100	VERTICAL
4	15960.58	41.63	54.00	-12.37	30.40	8.00	35.10	11.23	Average	268	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 100 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11001.30	38.25	54.00	-15.75	28.20	6.46	34.71	10.05	Average	85	100	HORIZONTAL
2	11004.28	51.53	74.00	-22.47	41.48	6.46	34.71	10.05	Peak	85	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11001.26	38.61	54.00	-15.39	28.56	6.46	34.71	10.05	Average	155	100	VERTICAL
2	11004.94	51.51	74.00	-22.49	41.45	6.47	34.71	10.06	Peak	155	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 116 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11155.08	51.59	74.00	-22.41	41.43	6.55	34.69	10.16	Peak	13	100	HORIZONTAL
2	11162.38	39.56	54.00	-14.44	29.39	6.56	34.69	10.17	Average	13	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11163.74	52.38	74.00	-21.62	42.21	6.56	34.69	10.17	Peak	281	100	VERTICAL
2	11164.64	44.04	54.00	-9.96	33.87	6.56	34.69	10.17	Average	281	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 140 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11399.06	38.58	54.00	-15.42	28.26	6.69	34.67	10.32	Average	305	100	HORIZONTAL
2	11403.92	51.77	74.00	-22.23	41.45	6.69	34.67	10.32	Peak	305	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11399.66	51.75	74.00	-22.25	41.43	6.69	34.67	10.32	Peak	140	100	VERTICAL
2	11399.68	39.45	54.00	-14.55	29.13	6.69	34.67	10.32	Average	140	100	VERTICAL

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 144 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Apr. 16, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	deg	cm	Pol/Phase
1	11422.76	51.92	74.00	-22.08	41.59	6.70	38.30	34.67	Peak	203	100	HORIZONTAL
2	11428.21	38.90	54.00	-15.10	28.57	6.70	38.30	34.67	Average	203	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	deg	cm	Pol/Phase
1	11422.44	51.73	74.00	-22.27	41.40	6.70	38.30	34.67	Peak	95	100	VERTICAL
2	11427.53	39.24	54.00	-14.76	28.91	6.70	38.30	34.67	Average	95	100	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.7.3. Test Procedures

The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 52, 60, 64 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 07, 2014		

Channel 52

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	Pol/Phase
1	5143.49	59.63	74.00	-14.37	22.15	4.34	0.00	37.48	Peak	62	199	HORIZONTAL
2	5150.00	45.97	54.00	-8.03	8.49	4.34	0.00	37.48	Average	62	199	HORIZONTAL
3	5252.19	121.97			84.27	4.40	0.00	37.70	Peak	62	199	HORIZONTAL
4	5252.62	111.58			73.88	4.40	0.00	37.70	Average	62	199	HORIZONTAL
5	5350.00	61.58	74.00	-12.42	23.65	4.47	0.00	37.93	Peak	62	199	HORIZONTAL
6	5350.00	47.01	54.00	-6.99	9.08	4.47	0.00	37.93	Average	62	199	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	Pol/Phase
1	5303.76	121.77			83.95	4.44	0.00	37.82	Peak	345	100	VERTICAL
2	5304.92	111.48			73.66	4.44	0.00	37.82	Average	345	100	VERTICAL
3	5350.00	68.96	74.00	-5.04	31.03	4.47	0.00	37.93	Peak	345	100	VERTICAL
4	5350.00	53.07	54.00	-0.93	15.14	4.47	0.00	37.93	Average	345	100	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	Pol/Phase
1	5317.25	116.49			78.63	4.45	0.00	37.86	Peak	248	100	VERTICAL
2	5317.54	105.29			67.43	4.45	0.00	37.86	Average	248	100	VERTICAL
3	5350.00	67.75	74.00	-6.25	29.82	4.47	0.00	37.93	Peak	248	100	VERTICAL
4	5350.00	53.87	54.00	-0.13	15.94	4.47	0.00	37.93	Average	248	100	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 100, 140, 144 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	CH 100, 140: Mar. 07, 2014 / CH 144: Apr. 16, 2014		

Channel 100

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	5457.97	63.13	74.00	-10.87	24.97	4.54	0.00	38.16	Peak	62	176	HORIZONTAL
2	5459.42	47.79	54.00	-6.21	9.63	4.54	0.00	38.16	Average	62	176	HORIZONTAL
3	5470.00	70.39	74.00	-3.61	32.19	4.55	0.00	38.20	Peak	62	176	HORIZONTAL
4	5470.00	53.92	54.00	-0.08	15.72	4.55	0.00	38.20	Average	62	176	HORIZONTAL
5	5496.09	106.80			68.57	4.56	0.00	38.23	Average	62	176	HORIZONTAL
6	5497.40	117.00			78.73	4.57	0.00	38.27	Peak	62	176	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	5703.76	117.14			78.11	4.71	0.00	39.03	Peak	347	105	VERTICAL
2	5704.34	105.42			66.39	4.71	0.00	39.03	Average	347	105	VERTICAL
3	5725.00	69.10	74.00	-4.90	30.01	4.72	0.00	39.09	Peak	347	105	VERTICAL
4	5725.00	53.09	54.00	-0.91	14.00	4.72	0.00	39.09	Average	347	105	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Channel 144

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m		dBuV	dB	dB/m	dB		deg	cm	
1	5723.21	123.75			84.66	4.72	34.37	0.00	Peak	1	130	VERTICAL
2	5724.01	113.40			74.31	4.72	34.37	0.00	Average	1	130	VERTICAL
3	5831.41	46.38	54.00	-7.62	6.91	4.79	34.68	0.00	Average	1	130	VERTICAL
4	5833.01	59.93	74.00	-14.07	20.46	4.79	34.68	0.00	Peak	1	130	VERTICAL

Item 1, 2 are the fundamental frequency at 5720 MHz.

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 54, 62 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	CH 54: Mar. 07, 2014 / CH62: Mar. 11, 2014		

Channel 54

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	Pol/Phase
1	5263.34	117.16			79.41	4.42	0.00	37.75	Peak	347	100	VERTICAL
2	5264.21	107.46			69.71	4.42	0.00	37.75	Average	347	100	VERTICAL
3	5350.00	66.66	74.00	-7.34	28.73	4.47	0.00	37.93	Peak	347	100	VERTICAL
4	5350.00	52.82	54.00	-1.18	14.89	4.47	0.00	37.93	Average	347	100	VERTICAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	Pol/Phase
1	5308.80	100.56			62.74	4.44	0.00	37.82	Average	5	156	VERTICAL
2	5308.80	110.77			72.95	4.44	0.00	37.82	Peak	5	156	VERTICAL
3	5350.00	53.20	54.00	-0.80	15.27	4.47	0.00	37.93	Average	5	156	VERTICAL
4	5350.00	66.94	74.00	-12.94	29.01	4.47	0.00	37.93	Peak	5	156	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 102, 110, 134 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Channel 102

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	5451.60	58.16	74.00	-15.84	20.00	4.54	0.00	38.16	Peak	358	148	VERTICAL
2	5452.40	44.67	54.00	-9.33	6.51	4.54	0.00	38.16	Average	358	148	VERTICAL
3	5470.00	66.12	74.00	-7.88	27.92	4.55	0.00	38.20	Peak	358	148	VERTICAL
4	5470.00	53.89	54.00	-0.11	15.69	4.55	0.00	38.20	Average	358	148	VERTICAL
5	5511.60	109.60			71.33	4.57	0.00	38.27	Peak	358	148	VERTICAL
6	5511.60	99.85			61.58	4.57	0.00	38.27	Average	358	148	VERTICAL

Item 5, 6 are the fundamental frequency at 5510 MHz.

Channel 110

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	5452.40	63.42	74.00	-10.58	25.26	4.54	0.00	38.16	Peak	358	147	VERTICAL
2	5452.80	50.18	54.00	-3.82	12.02	4.54	0.00	38.16	Average	358	147	VERTICAL
3	5470.00	66.32	74.00	-7.68	28.12	4.55	0.00	38.20	Peak	358	147	VERTICAL
4	5470.00	53.72	54.00	-0.28	15.52	4.55	0.00	38.20	Average	358	147	VERTICAL
5	5551.20	109.91			71.45	4.60	0.00	38.46	Average	358	147	VERTICAL
6	5552.00	120.03			81.57	4.60	0.00	38.46	Peak	358	147	VERTICAL

Item 5, 6 are the fundamental frequency at 5550 MHz.

Channel 134

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	5682.40	106.57			67.67	4.68	0.00	38.90	Average	358	131	VERTICAL
2	5683.20	116.40			77.50	4.68	0.00	38.90	Peak	358	131	VERTICAL
3	5725.40	53.60	54.00	-0.40	14.51	4.72	0.00	39.09	Average	358	131	VERTICAL
4	5725.80	67.06	74.00	-6.94	27.97	4.72	0.00	39.09	Peak	358	131	VERTICAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 142 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Apr. 16, 2014		

Channel 142

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	deg	cm
1	5702.79	121.28			82.25	4.71	34.32	0.00	Peak	359	130 VERTICAL
2	5703.59	111.24			72.21	4.71	34.32	0.00	Average	359	130 VERTICAL
3	5825.00	60.21	74.00	-13.79	20.74	4.79	34.68	0.00	Peak	359	130 VERTICAL
4	5825.00	47.96	54.00	-6.04	8.49	4.79	34.68	0.00	Average	359	130 VERTICAL

Item 1, 2 are the fundamental frequency at 5710 MHz.

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 58, 106 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 11, 2014		

Channel 58

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	5138.00	52.59	74.00	-21.41	15.15	4.33	0.00	37.44	Peak	357	100	VERTICAL
2	5145.00	40.45	54.00	-13.55	2.97	4.34	0.00	37.48	Average	357	100	VERTICAL
3	5308.00	104.00			66.18	4.44	0.00	37.82	Peak	357	100	VERTICAL
4	5308.00	94.07			56.25	4.44	0.00	37.82	Average	357	100	VERTICAL
5	5350.00	69.33	74.00	-4.67	31.40	4.47	0.00	37.93	Peak	357	100	VERTICAL
6	5350.00	53.47	54.00	-0.53	15.54	4.47	0.00	37.93	Average	357	100	VERTICAL

Item 3, 4 are the fundamental frequency at 5290 MHz.

Channel 106

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	5445.00	49.56	54.00	-4.44	11.44	4.53	0.00	38.12	Average	346	147	VERTICAL
2	5446.00	64.98	74.00	-9.02	26.82	4.54	0.00	38.16	Peak	346	147	VERTICAL
3	5466.00	53.81	54.00	-0.19	15.61	4.55	0.00	38.20	Average	346	147	VERTICAL
4	5467.00	68.33	74.00	-5.67	30.13	4.55	0.00	38.20	Peak	346	147	VERTICAL
5	5505.00	94.98			56.71	4.57	0.00	38.27	Average	346	147	VERTICAL
6	5506.00	104.58			66.31	4.57	0.00	38.27	Peak	346	147	VERTICAL
7	5725.00	52.86	74.00	-21.14	13.77	4.72	0.00	39.09	Peak	346	147	VERTICAL
8	5725.00	41.02	54.00	-12.98	1.93	4.72	0.00	39.09	Average	346	147	VERTICAL

Item 5, 6 are the fundamental frequency at 5530 MHz.

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 138 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Apr. 16, 2014		

Channel 142

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	
1	5672.37	104.67			65.77	4.68	34.22	0.00	Average	354	107	VERTICAL
2	5673.17	114.09			75.19	4.68	34.22	0.00	Peak	354	107	VERTICAL
3	5825.00	65.37	74.00	-8.63	25.90	4.79	34.68	0.00	Peak	354	107	VERTICAL
4	5826.60	53.15	54.00	-0.85	13.68	4.79	34.68	0.00	Average	354	107	VERTICAL

Item 1, 2 are the fundamental frequency at 5710 MHz.

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 52, 60, 64 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Mar. 07, 2014		

Channel 52

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	5148.20	61.18	74.00	-12.82	23.70	4.34	0.00	37.48	Peak	343	100	VERTICAL
2	5150.00	48.35	54.00	-5.65	10.87	4.34	0.00	37.48	Average	343	100	VERTICAL
3	5259.00	123.42			85.67	4.42	0.00	37.75	Peak	343	100	VERTICAL
4	5259.00	113.63			75.88	4.42	0.00	37.75	Average	343	100	VERTICAL
5	5350.00	63.13	74.00	-10.87	25.20	4.47	0.00	37.93	Peak	343	100	VERTICAL
6	5350.00	50.39	54.00	-3.61	12.46	4.47	0.00	37.93	Average	343	100	VERTICAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	5297.33	122.21			84.39	4.44	0.00	37.82	Peak	345	102	VERTICAL
2	5297.33	111.61			73.79	4.44	0.00	37.82	Average	345	102	VERTICAL
3	5350.00	66.86	74.00	-7.14	28.93	4.47	0.00	37.93	Peak	345	102	VERTICAL
4	5350.00	53.48	54.00	-0.52	15.55	4.47	0.00	37.93	Average	345	102	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	5319.50	118.88			81.02	4.45	0.00	37.86	Peak	345	101	VERTICAL
2	5319.50	108.67			70.81	4.45	0.00	37.86	Average	345	101	VERTICAL
3	5350.00	67.89	74.00	-6.11	29.96	4.47	0.00	37.93	Peak	345	101	VERTICAL
4	5350.00	53.75	54.00	-0.25	15.82	4.47	0.00	37.93	Average	345	101	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	25°C	Humidity	64%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 100, 140, 144 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	CH 100, 140: Mar. 07, 2014 / CH 144: Apr. 16, 2014		

Channel 100

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	5460.00	61.74	74.00	-12.26	23.58	4.54	0.00	38.16	Peak	20	136	VERTICAL
2	5460.00	47.74	54.00	-6.26	9.58	4.54	0.00	38.16	Average	20	136	VERTICAL
3	5470.00	68.76	74.00	-5.24	30.56	4.55	0.00	38.20	Peak	20	136	VERTICAL
4	5470.00	53.36	54.00	-0.64	15.16	4.55	0.00	38.20	Average	20	136	VERTICAL
5	5500.43	108.27			70.00	4.57	0.00	38.27	Average	20	136	VERTICAL
6	5500.58	118.67			80.40	4.57	0.00	38.27	Peak	20	136	VERTICAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	5695.22	108.04			69.07	4.70	0.00	38.97	Average	357	131	VERTICAL
2	5695.66	118.77			79.80	4.70	0.00	38.97	Peak	357	131	VERTICAL
3	5725.14	52.99	54.00	-1.01	13.90	4.72	0.00	39.09	Average	357	131	VERTICAL
4	5725.43	67.55	74.00	-6.45	28.46	4.72	0.00	39.09	Peak	357	131	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Channel 144

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5726.41	124.98			85.89	4.72	34.37	0.00	Peak	359	128	VERTICAL
2	5726.41	114.75			75.66	4.72	34.37	0.00	Average	359	128	VERTICAL
3	5829.81	46.94	54.00	-7.06	7.47	4.79	34.68	0.00	Average	359	128	VERTICAL
4	5831.41	59.07	74.00	-14.93	19.60	4.79	34.68	0.00	Peak	359	128	VERTICAL

Item 1, 2 are the fundamental frequency at 5720 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

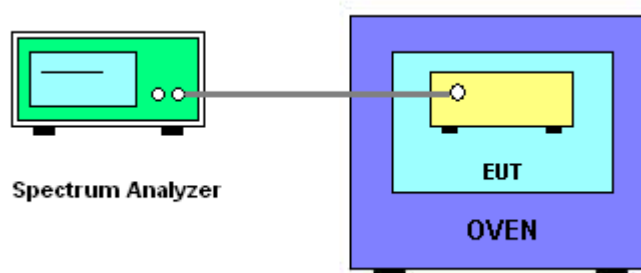

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	20°C	Humidity	62%
Test Engineer	Jim Huang	Test Date	5300 MHz, 5500 MHz: Mar. 14, 2014 / 5720 MHz: Apr. 16, 2014

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)		
(V)	5300 MHz	5500 MHz	5720 MHz
126.50	5299.9910	5499.9920	5719.9970
110.00	5299.9960	5499.9950	5719.9976
93.50	5299.9990	5499.9970	5719.9984
Max. Deviation (MHz)	0.0090	0.0080	0.0030
Max. Deviation (ppm)	1.70	1.45	0.52

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)		
(°C)	5300 MHz	5500 MHz	5720 MHz
0	5299.9900	5499.9910	5719.9969
10	5299.9920	5499.9930	5719.9972
20	5299.9960	5499.9950	5719.9976
30	5299.9980	5499.9960	5719.9978
40	5299.9990	5499.9980	5719.9983
50	5300.0000	5500.0010	5719.9985
Max. Deviation (MHz)	0.0100	0.0090	0.0031
Max. Deviation (ppm)	1.89	1.64	0.54

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Jul. 17, 2013	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
BILOG ANTENNA	Teseq GmbH	CBL 6112D	35236	30MHz ~ 2GHz	Nov. 29, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 30, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Signal analyzer	Agilent	N9010A	MY52220519	10Hz~44GHz	Dec. 11, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1 = AMN/LISN VSWR 2 =	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.191	dB	K=1	0.095
Cable loss	± 0.169	dB	K=2	0.084
Antenna gain	± 0.191	dB	K=2	0.096
Site imperfection	± 0.582	dB	Triangular	0.291
Pre-amplifier gain	± 0.304	dB	K=2	0.152
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.186	dB	K=1	0.093
Cable loss	± 0.167	dB	K=2	0.083
Antenna gain	± 0.190	dB	K=2	0.095
Site imperfection	± 0.488	dB	Triangular	0.244
Pre-amplifier gain	± 0.269	dB	K=2	0.134
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	± 0.038	dB	K=2	0.019
Attenuator	± 0.047	dB	K=2	0.024
Power Meter specification	± 0.300	dB	Triangular	0.150
Power Sensor specification	± 0.300	dB	Rectangular	0.150
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$				1.726