

Appendix C - Highest Measurement Plots

Date: 2022/11/14

02_WLAN 2.4 GHz_802.11b_Ch1_Bottom Face_0 mm_ANT Main

DUT: TN3402Y

Communication System: UID 0, IEEE 802.11b (0); Frequency: 2412 MHz; Duty Cycle: 1:1.008
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.721$ S/m; $\epsilon_r = 39.172$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(8.13, 8.13, 8.13) @ 2412 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.938 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.00 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 43.2%

Maximum value of SAR (measured) = 0.930 W/kg

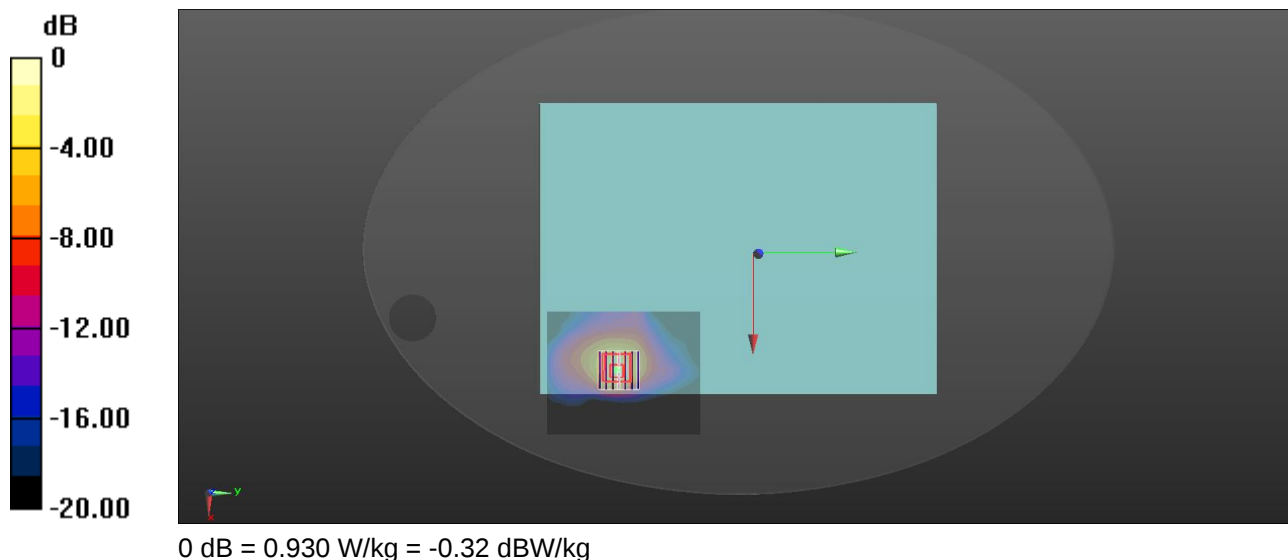

Date: 2022/11/14

18_WLAN 2.4 GHz_802.11b_Ch1_Bottom Face_0 mm_ANT Aux

DUT: TN3402Y

Communication System: UID 0, IEEE 802.11b (0); Frequency: 2412 MHz; Duty Cycle: 1:1.008

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.721$ S/m; $\epsilon_r = 39.172$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(8.13, 8.13, 8.13) @ 2412 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.29 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.244 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 40.9%

Maximum value of SAR (measured) = 0.982 W/kg

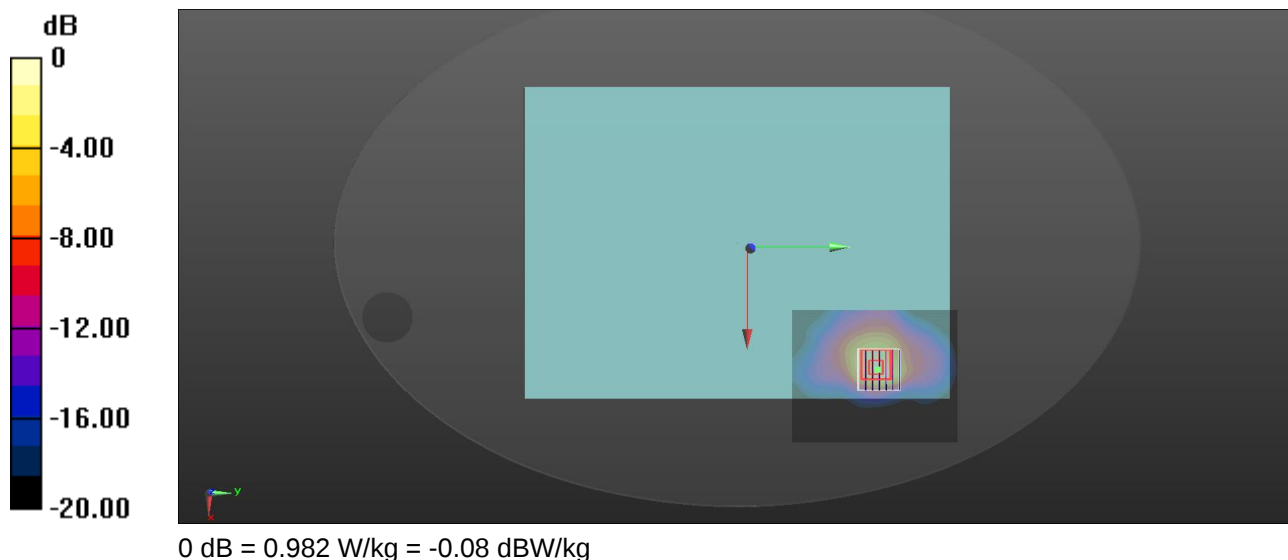

Date: 2022/11/14

29_Bluetooth_GFSK_Ch0_Bottom Face_0 mm_ANT Main

DUT: TN3402Y

Communication System: UID 0, Bluetooth 3.0 (0); Frequency: 2402 MHz; Duty Cycle: 1:1.306

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.709$ S/m; $\epsilon_r = 39.212$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(8.13, 8.13, 8.13) @ 2402 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.604 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.60 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.844 W/kg

SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.143 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 40%

Maximum value of SAR (measured) = 0.601 W/kg

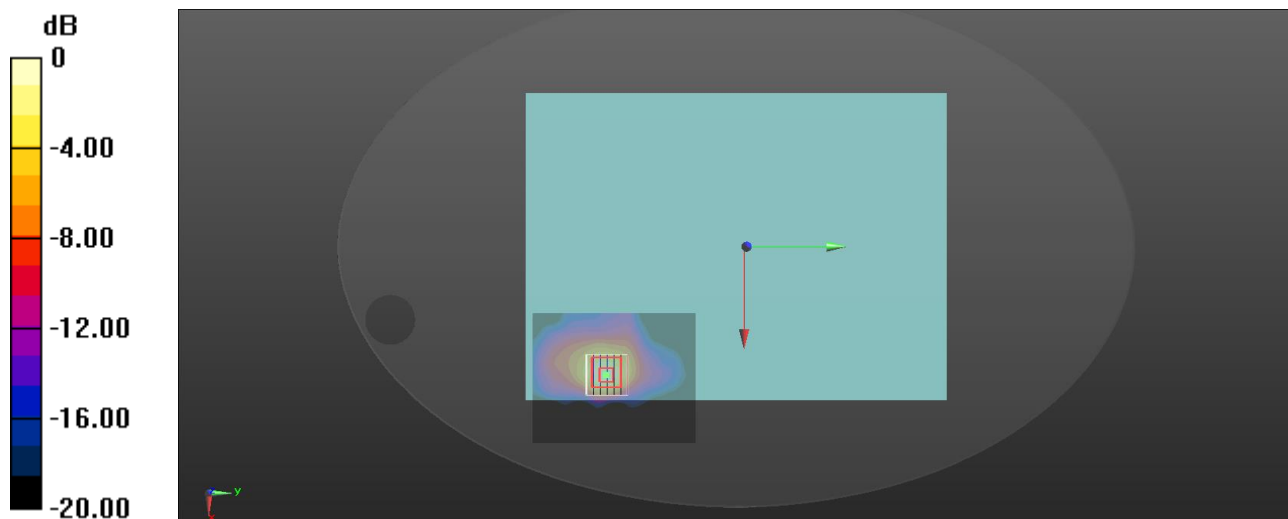

0 dB = 0.601 W/kg = -2.21 dBW/kg

Date: 2022/11/14

39_Bluetooth_GFSK_Ch78_Bottom Face_0 mm_ANT Aux

DUT: TN3402Y

Communication System: UID 0, Bluetooth 3.0 (0); Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.802$ S/m; $\epsilon_r = 38.986$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(8.13, 8.13, 8.13) @ 2480 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.714 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.33 V/m; Power Drift = -0.20 dB


Peak SAR (extrapolated) = 0.893 W/kg

SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 38.8%

Maximum value of SAR (measured) = 0.630 W/kg

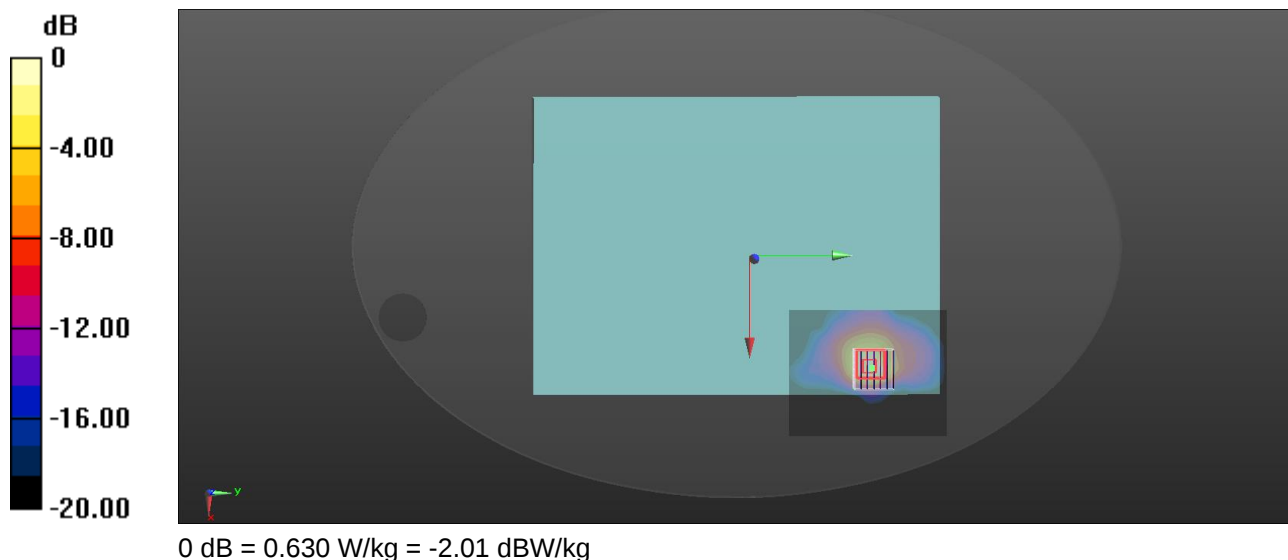

Date: 2022/11/15

42_WLAN 5 GHz_802.11ac VHT160_Ch50_Bottom Face_0 mm_ANT Main

DUT: TN3402YA

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT160 (0); Frequency: 5250 MHz;Duty Cycle: 1:1.067
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.701$ S/m; $\epsilon_r = 36.502$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(5.74, 5.74, 5.74) @ 5250 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.96 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 21.63 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 0.729 W/kg; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 64.5%

Maximum value of SAR (measured) = 1.72 W/kg

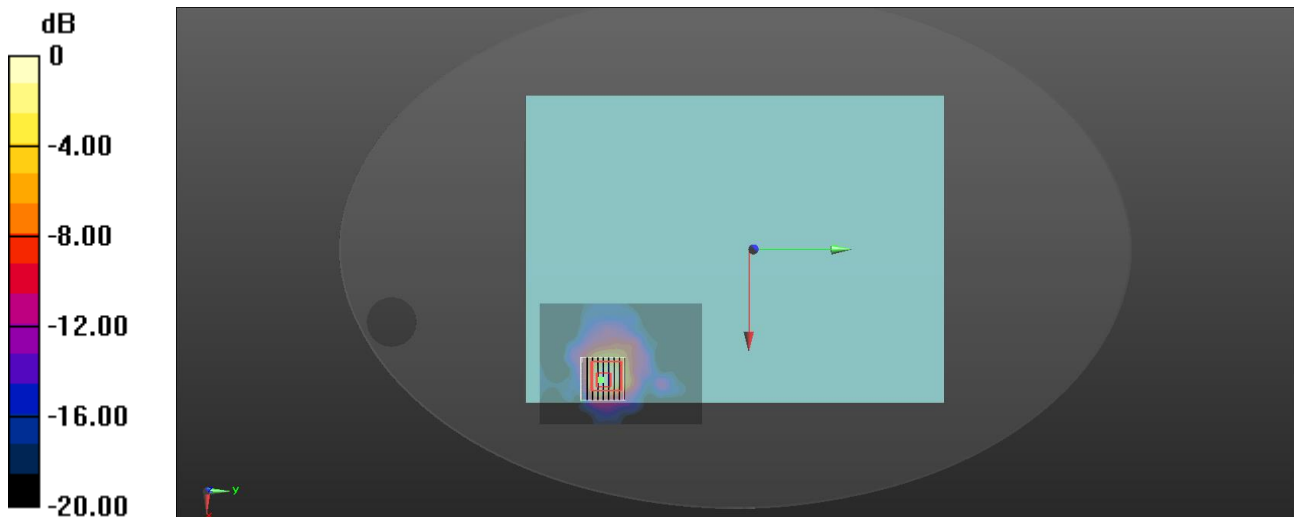

0 dB = 1.72 W/kg = 2.36 dBW/kg

Date: 2022/11/15

50_WLAN 5 GHz_802.11ac VHT160_Ch50_Bottom Face_0 mm_ANT Aux

DUT: TN3402YA

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT160 (0); Frequency: 5250 MHz;Duty Cycle: 1:1.067
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.701$ S/m; $\epsilon_r = 36.502$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(5.74, 5.74, 5.74) @ 5250 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.82 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 15.78 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 0.688 W/kg; SAR(10 g) = 0.234 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 1.58 W/kg

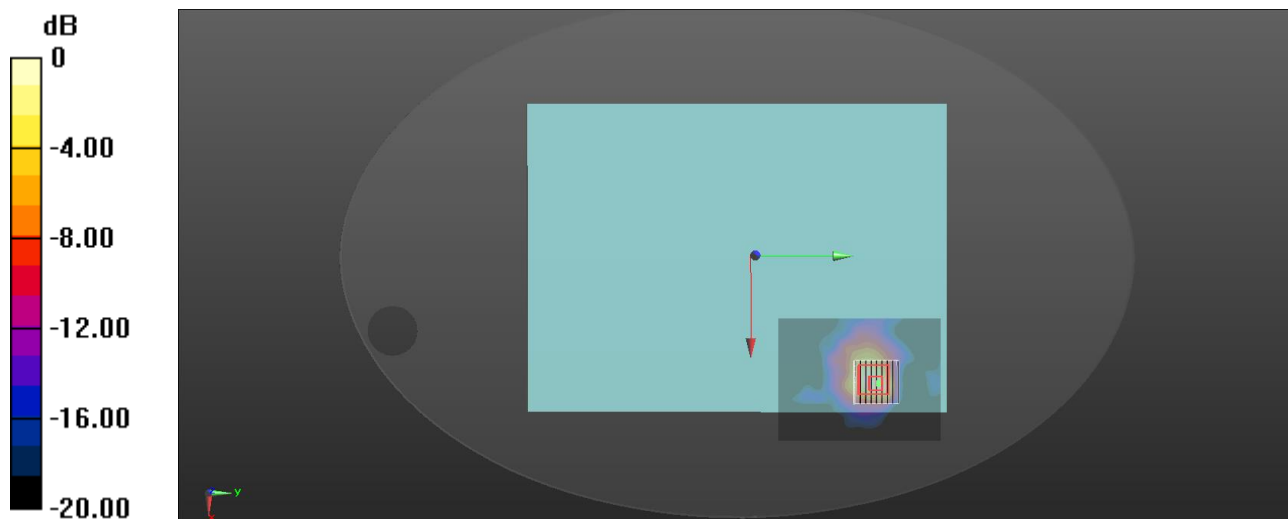

0 dB = 1.58 W/kg = 1.99 dBW/kg

Date: 2022/11/15

63_WLAN 5 GHz_802.11ac VHT80_Ch106_Bottom Face_0 mm_ANT Main

DUT: TN3402YA

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5530 MHz;Duty Cycle: 1:1.043

Medium parameters used: $f = 5530$ MHz; $\sigma = 4.981$ S/m; $\epsilon_r = 35.978$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(5.19, 5.19, 5.19) @ 5530 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.27 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 23.73 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 4.08 W/kg

SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.275 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.3%

Maximum value of SAR (measured) = 2.16 W/kg

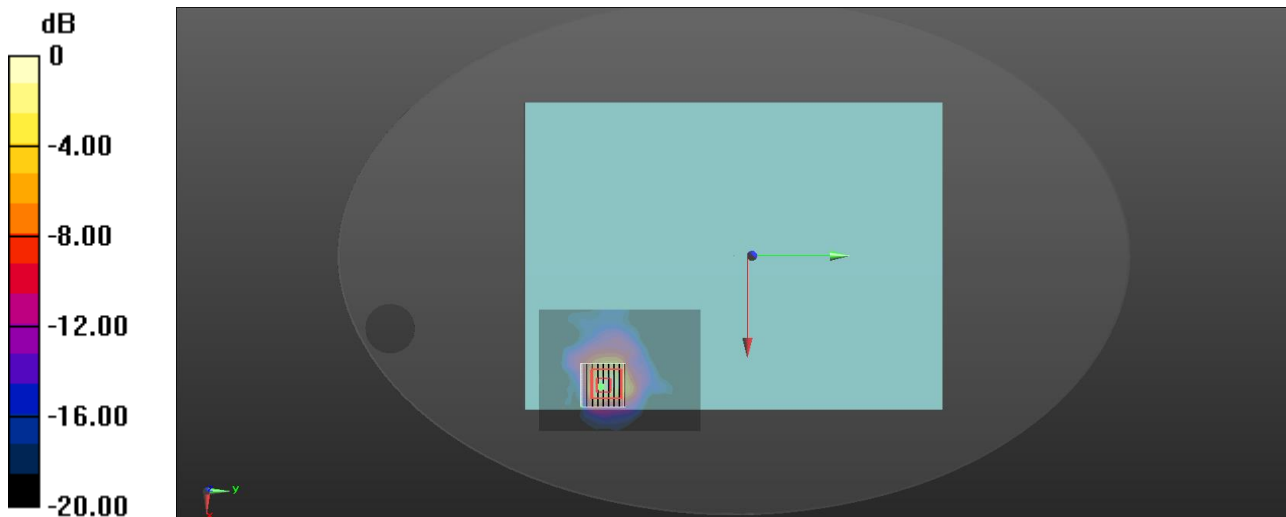

0 dB = 2.16 W/kg = 3.34 dBW/kg

Date: 2022/11/15

71_WLAN 5 GHz_802.11ac_VHT80_Ch138_Bottom Face_0 mm_ANT Aux

DUT: TN3402YA

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5690 MHz;Duty Cycle: 1:1.043
Medium parameters used: $f = 5690$ MHz; $\sigma = 5.15$ S/m; $\epsilon_r = 35.655$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(5.25, 5.25, 5.25) @ 5690 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.64 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 18.05 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.212 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.1%

Maximum value of SAR (measured) = 1.60 W/kg

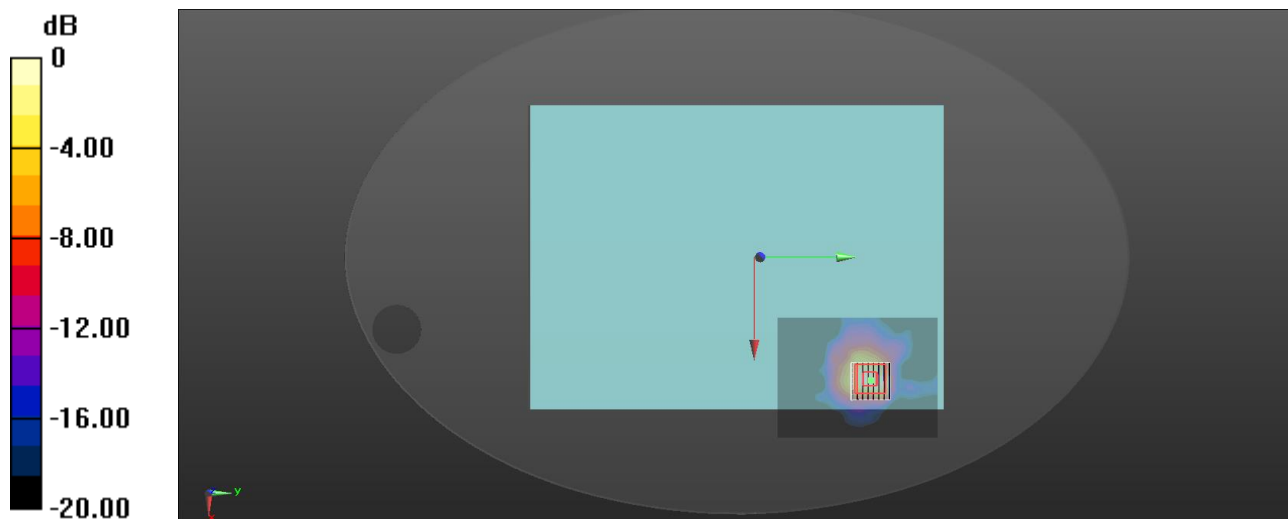

0 dB = 1.60 W/kg = 2.04 dBW/kg

Date: 2022/11/16

90_WLAN 5 GHz_802.11ac VHT80_Ch155_Bottom Face_0 mm_ANT Main

DUT: TN3402YA

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1.043

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.305$ S/m; $\epsilon_r = 35.138$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(5.25, 5.25, 5.25) @ 5775 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.08 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 21.96 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 3.90 W/kg

SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.252 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 1.98 W/kg

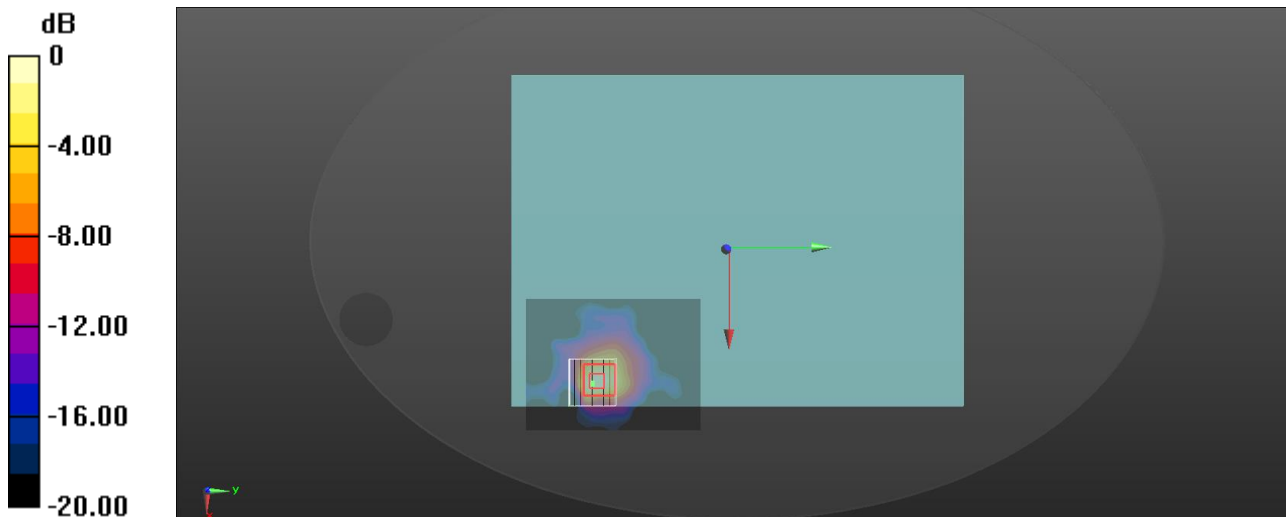

0 dB = 1.98 W/kg = 2.97 dBW/kg

Date: 2022/11/16

98_WLAN 5 GHz_802.11ac VHT80_Ch155_Bottom Face_0 mm_ANT Aux

DUT: TN3402YA

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1.043
Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.305 \text{ S/m}$; $\epsilon_r = 35.138$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(5.25, 5.25, 5.25) @ 5775 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 1.90 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
Reference Value = 20.40 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 0.734 W/kg; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 1.86 W/kg

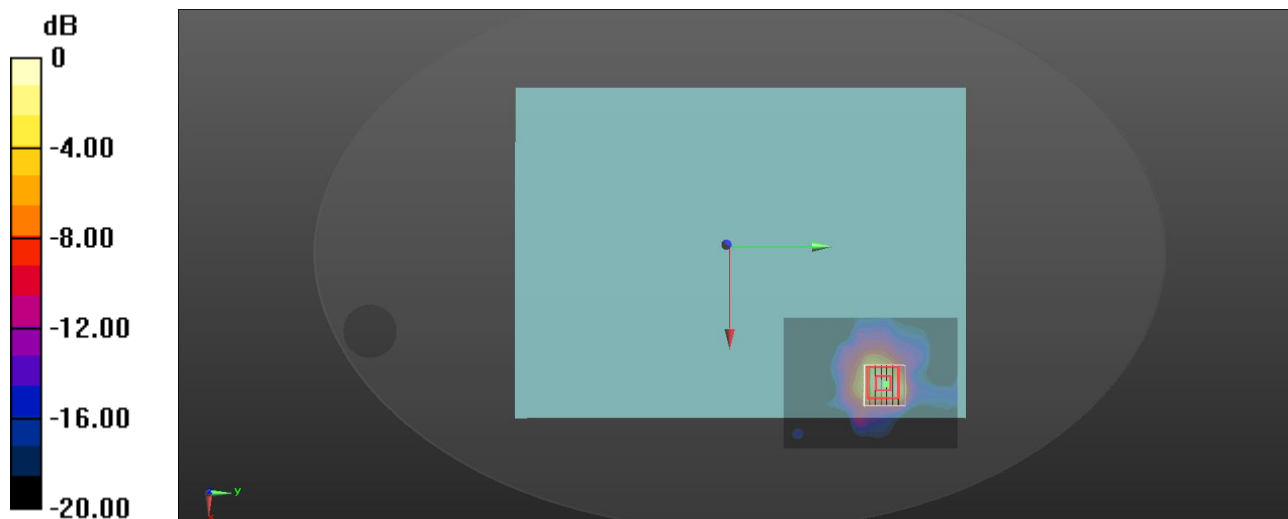

0 dB = 1.86 W/kg = 2.70 dBW/kg

Date: 2022/11/16

106_WLAN 5 GHz_802.11ac VHT160_Ch163_Bottom Face_0 mm_ANT Main

DUT: TN3402YA


Communication System: UID 0, IEEE 802.11ac(5GHz)VHT160 (0); Frequency: 5815 MHz;Duty Cycle: 1:1.067
Medium parameters used: $f = 5815 \text{ MHz}$; $\sigma = 5.35 \text{ S/m}$; $\epsilon_r = 35.103$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7756; ConvF(4.6, 4.6, 4.6) @ 5815 MHz; Calibrated: 2022/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 2.04 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
Reference Value = 22.03 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 4.10 W/kg
SAR(1 g) = 0.802 W/kg; SAR(10 g) = 0.259 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 56.6%
Maximum value of SAR (measured) = 2.06 W/kg

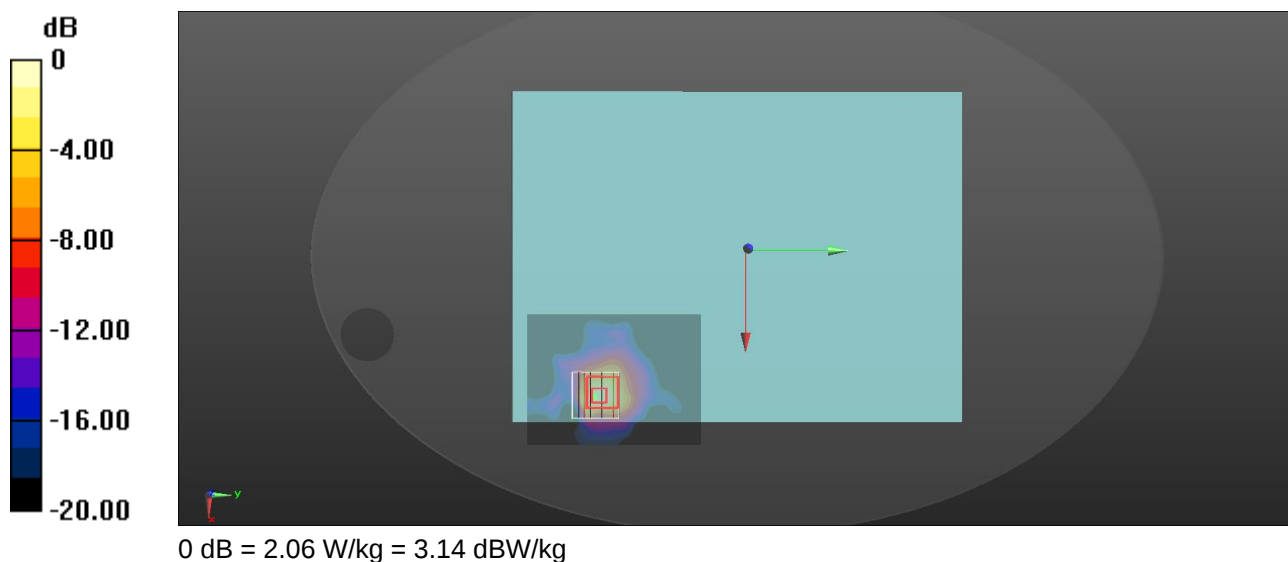

Date: 2022/11/16

119_WLAN 5 GHz_802.11ac VHT80_Ch171_Bottom Face_0 mm_ANT Aux

DUT: TN3402YA

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5855 MHz;Duty Cycle: 1:1.043
Medium parameters used: $f = 5855 \text{ MHz}$; $\sigma = 5.394 \text{ S/m}$; $\epsilon_r = 35.068$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7756; ConvF(4.6, 4.6, 4.6) @ 5855 MHz; Calibrated: 2022/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 1.92 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
Reference Value = 17.61 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 0.758 W/kg; SAR(10 g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 1.96 W/kg

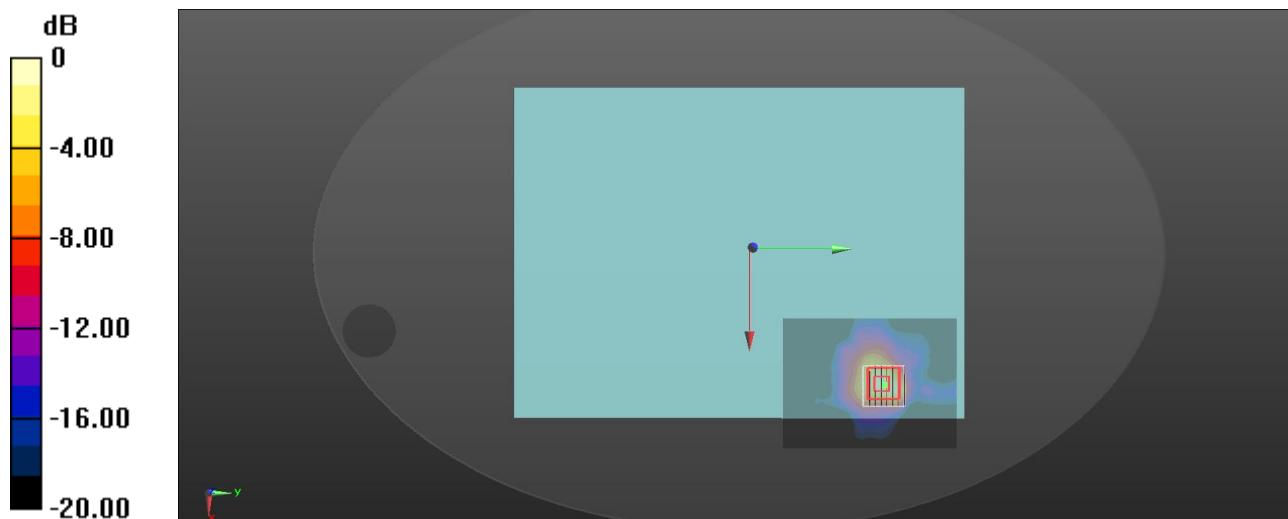

0 dB = 1.96 W/kg = 2.92 dBW/kg

501_WLAN 6 GHz_802.11ax HE160_Ch143_Bottom Face_0 mm_ANT Main

Device under Test Properties

Model: TN3402YA

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Face, 0.00	U-NII-7	WLAN, 10755-AAC	6665.0, 143	5.5	6.33	34.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1175	HSL6G	EX3DV4 - SN3847, 2022-03-24	DAE4 Sn541, 2022-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-18	2022-11-18
psSAR1g [W/Kg]	0.463	0.519
psSAR10g [W/Kg]	0.156	0.164
psPDab (1.0cm2, sq) [W/m2]		5.19
psPDab (4.0cm2, sq) [W/m2]		3.76
Power Drift [dB]	0.02	0.01
TSL Correction	Positive only	Positive only
M2/M1 [%]		46.9
Dist 3dB Peak [mm]		7.5

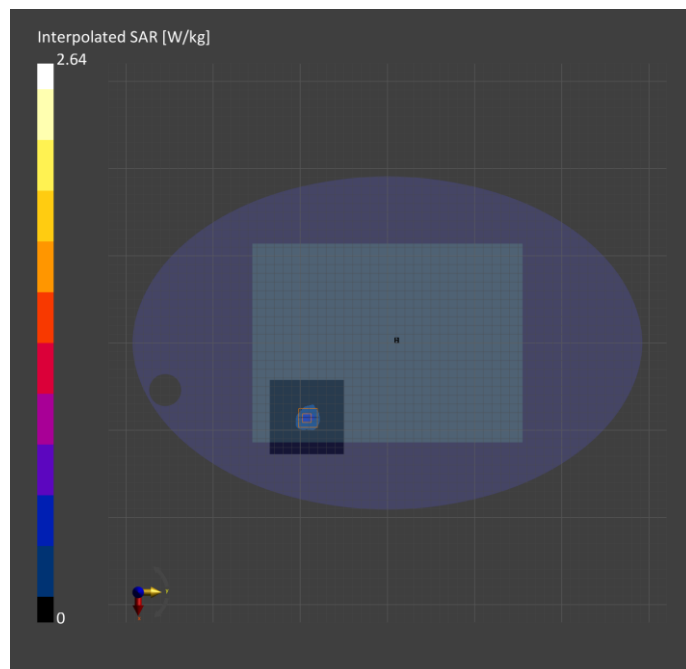

506_WLAN 6 GHz_802.11ax HE160_Ch15_Bottom Face_0 mm_ANT Main

Device under Test Properties

Model: TN3402YA

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Face, 0.00	U-NII-5	WLAN, 10755-AAC	6025.0, 15	5.5	5.49	36.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1175	HSL6G	EX3DV4 - SN3847, 2022-03-24	DAE4 Sn541, 2022-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-18	2022-11-18
psSAR1g [W/Kg]	0.519	0.583
psSAR10g [W/Kg]	0.175	0.189
psPDab (1.0cm2, sq) [W/m2]		5.83
psPDab (4.0cm2, sq) [W/m2]		4.31
Power Drift [dB]	-0.02	0.14
TSL Correction	Positive only	Positive only
M2/M1 [%]		52.2
Dist 3dB Peak [mm]		6.8

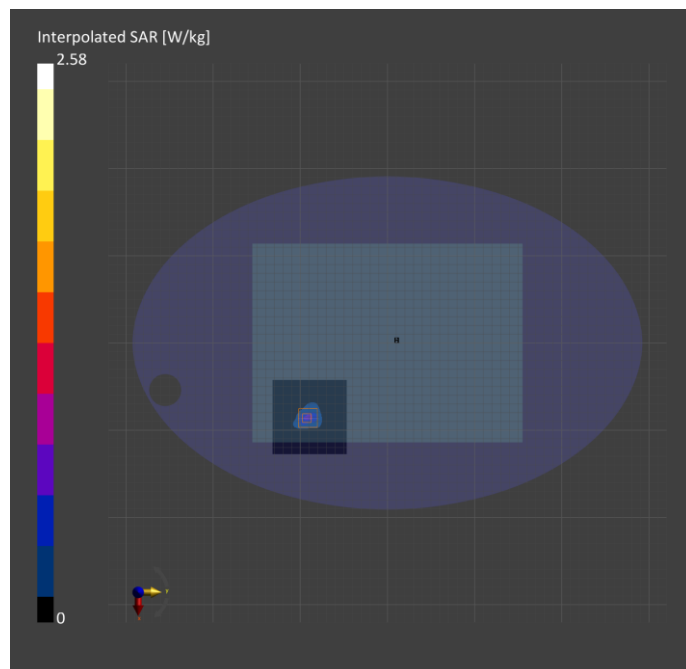

508_WLAN 6 GHz_802.11ax HE160_Ch79_Bottom Face_0 mm_ANT Main

Device under Test Properties

Model: TN3402YA

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Face, 0.00	U-NII-5	WLAN, 10755-AAC	6345.0, 79	5.5	5.92	35.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1175	HSL6G	EX3DV4 - SN3847, 2022-03-24	DAE4 Sn541, 2022-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-18	2022-11-18
psSAR1g [W/Kg]	0.483	0.536
psSAR10g [W/Kg]	0.164	0.178
psPDab (1.0cm2, sq) [W/m2]		5.36
psPDab (4.0cm2, sq) [W/m2]		4.05
Power Drift [dB]	-0.03	0.15
TSL Correction	Positive only	Positive only
M2/M1 [%]		50.2
Dist 3dB Peak [mm]		7.6

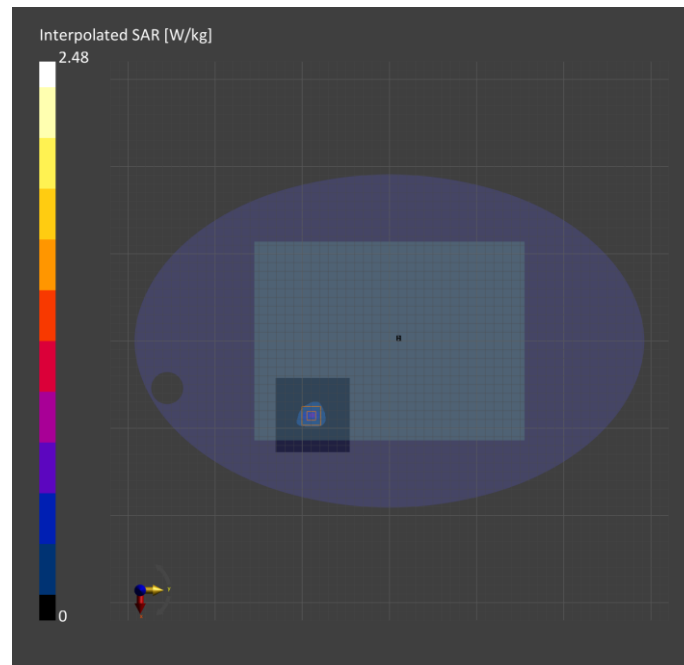

509_WLAN 6 GHz_802.11ax HE160_Ch111_Bottom Face_0 mm_ANT Main

Device under Test Properties

Model: TN3402YA

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Face, 0.00	U-NII-6	WLAN, 10755-AAC	6505.0, 111	5.5	6.09	35.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1175	HSL6G	EX3DV4 - SN3847, 2022-03-24	DAE4 Sn541, 2022-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-18	2022-11-18
psSAR1g [W/Kg]	0.449	0.512
psSAR10g [W/Kg]	0.156	0.169
psPDab (1.0cm2, sq) [W/m2]		5.12
psPDab (4.0cm2, sq) [W/m2]		3.84
Power Drift [dB]	-0.15	0.12
TSL Correction	Positive only	Positive only
M2/M1 [%]		48.0
Dist 3dB Peak [mm]		7.6

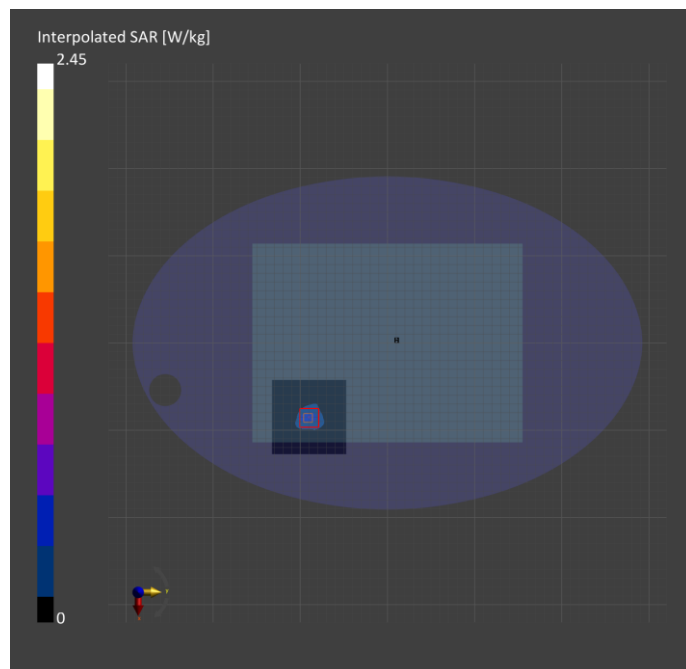

511_WLAN 6 GHz_802.11ax HE160_Ch207_Bottom Face_0 mm_ANT Main

Device under Test Properties

Model: TN3402YA

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Face, 0.00	U-NII-8	WLAN, 10755-AAC	6985.0, 207	5.5	6.69	34.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1175	HSL6G	EX3DV4 - SN3847, 2022-03-24	DAE4 Sn541, 2022-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-18	2022-11-18
psSAR1g [W/Kg]	0.471	0.553
psSAR10g [W/Kg]	0.169	0.180
psPDab (1.0cm2, sq) [W/m2]		5.53
psPDab (4.0cm2, sq) [W/m2]		4.18
Power Drift [dB]	-0.10	0.10
TSL Correction	Positive only	Positive only
M2/M1 [%]		44.1
Dist 3dB Peak [mm]		6.3

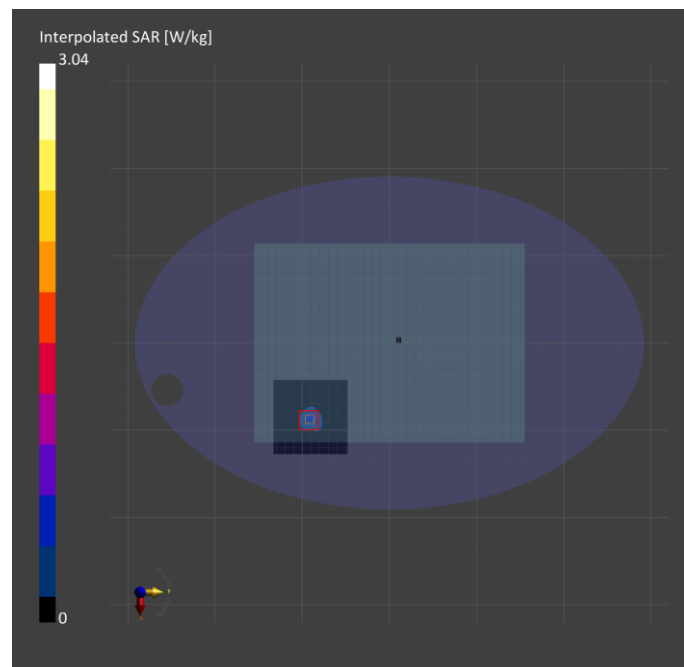

514_WLAN 6 GHz_802.11ax HE160_Ch175_Bottom Face_0 mm_ANT Aux

Device under Test Properties

Model: TN3402YA

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Face, 0.00	U-NII-7	WLAN, 10755-AAC	6825.0, 175	5.5	6.54	34.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1175	HSL6G	EX3DV4 - SN3847, 2022-03-24	DAE4 Sn541, 2022-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-18	2022-11-18
psSAR1g [W/Kg]	0.395	0.462
psSAR10g [W/Kg]	0.137	0.144
psPDab (1.0cm2, sq) [W/m2]		4.62
psPDab (4.0cm2, sq) [W/m2]		3.30
Power Drift [dB]	0.07	-0.03
TSL Correction	Positive only	Positive only
M2/M1 [%]		48.6
Dist 3dB Peak [mm]		6.1

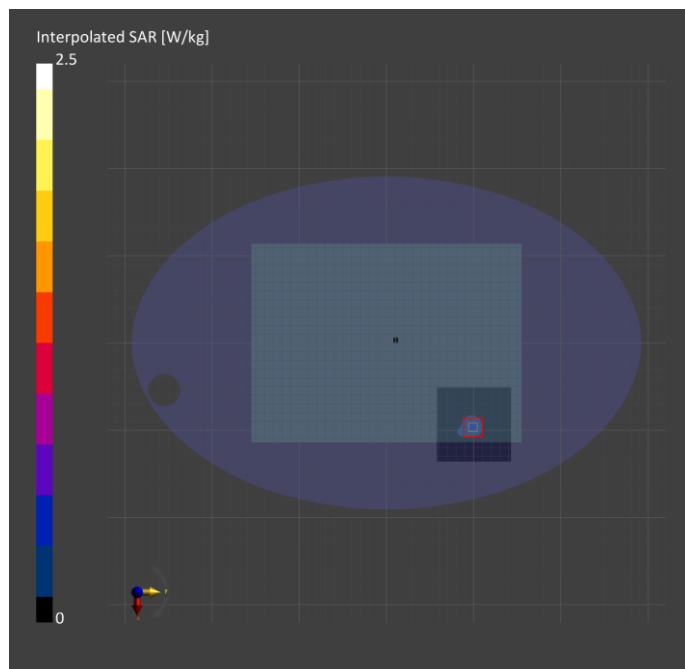

520_WLAN 6 GHz_802.11ax HE160_Ch47_Bottom Face_0 mm_ANT Aux

Device under Test Properties

Model: TN3402YA

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Face, 0.00	U-NII-5	WLAN, 10755-AAC	6185.0, 47	5.5	5.59	36.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1175	HSL6G	EX3DV4 - SN3847, 2022-03-24	DAE4 Sn541, 2022-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-18	2022-11-18
psSAR1g [W/Kg]	0.413	0.473
psSAR10g [W/Kg]	0.141	0.155
psPDab (1.0cm2, sq) [W/m2]		4.73
psPDab (4.0cm2, sq) [W/m2]		3.57
Power Drift [dB]	-0.14	0.02
TSL Correction	Positive only	Positive only
M2/M1 [%]		52.1
Dist 3dB Peak [mm]		7.5

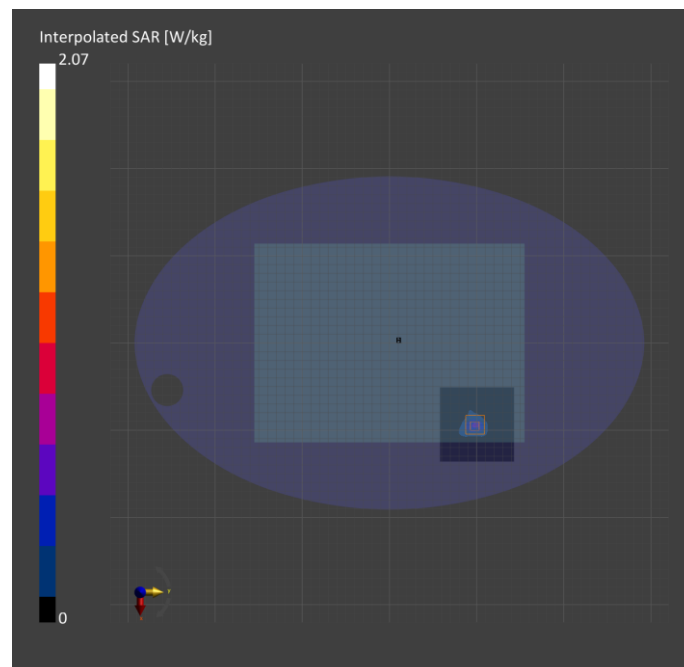

521_WLAN 6 GHz_802.11ax HE160_Ch79_Bottom Face_0 mm_ANT Aux

Device under Test Properties

Model: TN3402YA

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Face, 0.00	U-NII-5	WLAN, 10755-AAC	6345.0, 79	5.5	5.92	35.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1175	HSL6G	EX3DV4 - SN3847, 2022-03-24	DAE4 Sn541, 2022-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-18	2022-11-18
psSAR1g [W/Kg]	0.392	0.450
psSAR10g [W/Kg]	0.136	0.147
psPDab (1.0cm2, sq) [W/m2]		4.50
psPDab (4.0cm2, sq) [W/m2]		3.40
Power Drift [dB]	0.04	-0.08
TSL Correction	Positive only	Positive only
M2/M1 [%]		50.6
Dist 3dB Peak [mm]		6.8

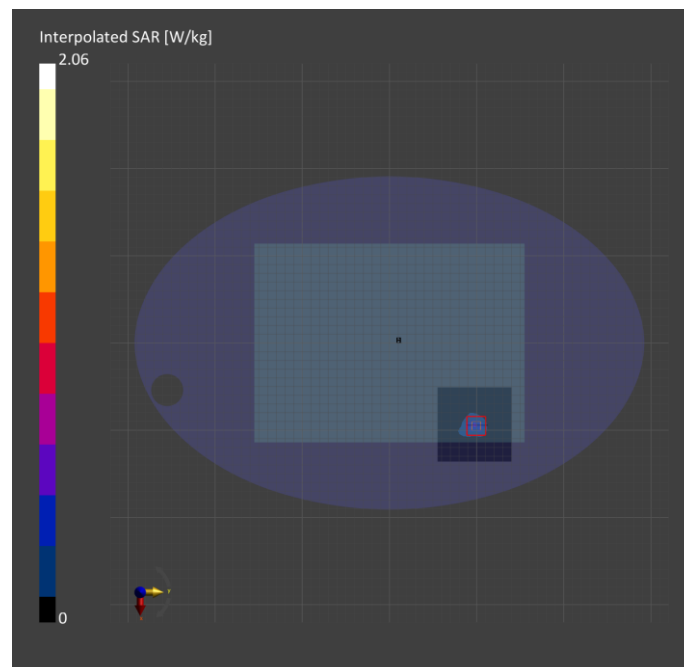

522_WLAN 6 GHz_802.11ax HE160_Ch111_Bottom Face_0 mm_ANT Aux

Device under Test Properties

Model: TN3402YA

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Face, 0.00	U-NII-6	WLAN, 10755-AAC	6505.0, 111	5.5	6.09	35.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1175	HSL6G	EX3DV4 - SN3847, 2022-03-24	DAE4 Sn541, 2022-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-18	2022-11-18
psSAR1g [W/Kg]	0.382	0.438
psSAR10g [W/Kg]	0.134	0.146
psPDab (1.0cm2, sq) [W/m2]		4.38
psPDab (4.0cm2, sq) [W/m2]		3.34
Power Drift [dB]	-0.02	0.01
TSL Correction	Positive only	Positive only
M2/M1 [%]		50.0
Dist 3dB Peak [mm]		7.5

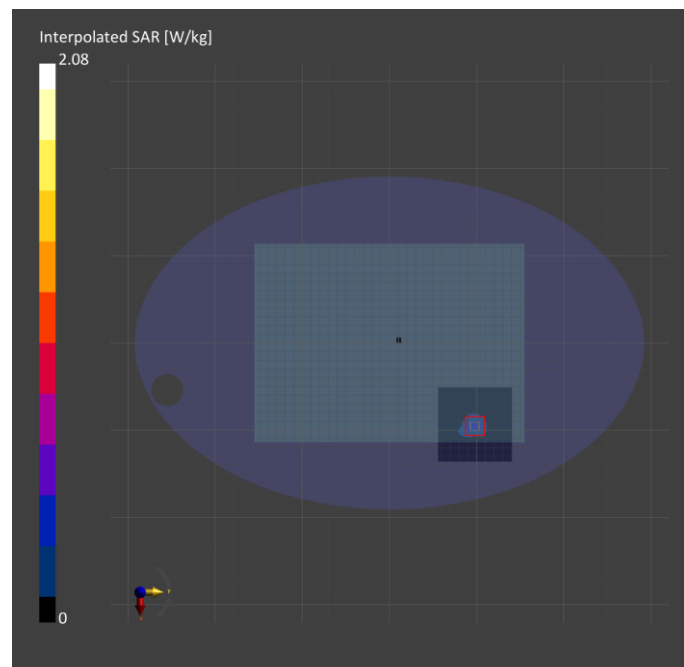

524_WLAN 6 GHz_802.11ax HE160_Ch207_Bottom Face_0 mm_ANT Aux

Device under Test Properties

Model: TN3402YA

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Face, 0.00	U-NII-8	WLAN, 10755-AAC	6985.0, 207	5.5	6.69	34.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1175	HSL6G	EX3DV4 - SN3847, 2022-03-24	DAE4 Sn541, 2022-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-18	2022-11-18
psSAR1g [W/Kg]	0.454	0.544
psSAR10g [W/Kg]	0.153	0.162
psPDab (1.0cm2, sq) [W/m2]		5.44
psPDab (4.0cm2, sq) [W/m2]		3.77
Power Drift [dB]	0.07	0.16
TSL Correction	Positive only	Positive only
M2/M1 [%]		47.4
Dist 3dB Peak [mm]		6.1

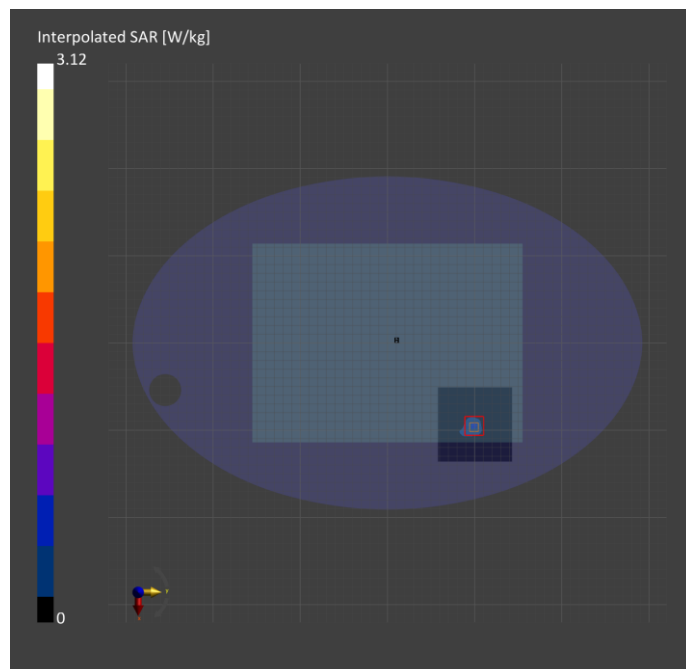

525_WLAN 6 GHz_802.11ax HE160_Ch15_Bottom Face_2 mm_ANT Main

Device under Test Properties

Model:TN3402YA

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Face, 2.00	U-NII-5	WLAN, 10755-AAC	6025.0, 15	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 5G Phantom	Air	EUmmWV4 - SN9639_F1-55GHz, 2022-08-24	DAE4 Sn541, 2022-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.05 x 0.05
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2022-11-19
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.24
psPDtot+ [W/m ²]	5.16
psPDmod+ [W/m ²]	8.22
E _{max} [V/m]	53.0
H _{max} [A/m]	0.412
Power Drift [dB]	-0.19

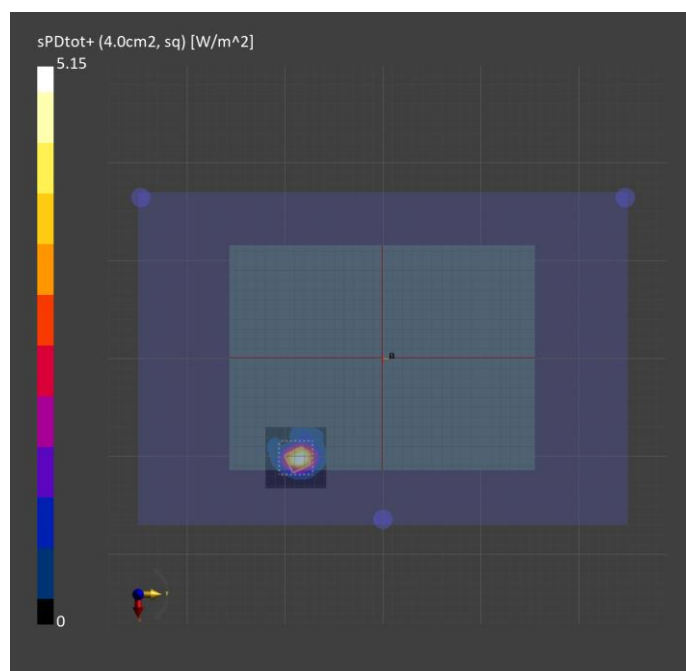

526_WLAN 6 GHz_802.11ax HE160_Ch79_Bottom Face_2 mm_ANT Main

Device under Test Properties

Model:TN3402YA

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Face, 2.00	U-NII-5	WLAN, 10755-AAC	6345.0, 79	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 5G Phantom	Air	EUmmWV4 - SN9639_F1-55GHz, 2022-08-24	DAE4 Sn541, 2022-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.05 x 0.05
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2022-11-19
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.91
psPDtot+ [W/m ²]	3.76
psPDmod+ [W/m ²]	6.20
E _{max} [V/m]	50.0
H _{max} [A/m]	0.370
Power Drift [dB]	-0.04

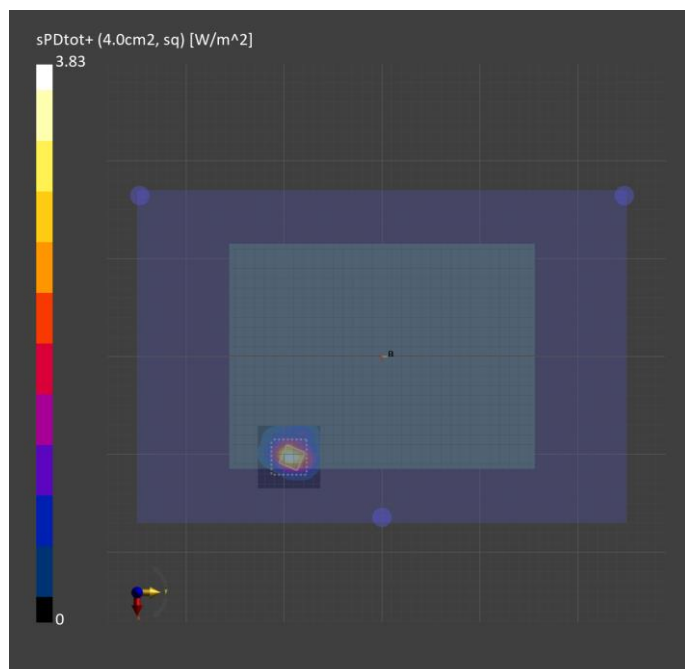

527_WLAN 6 GHz_802.11ax HE160_Ch111_Bottom Face_2 mm_ANT Main

Device under Test Properties

Model:TN3402YA

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Face, 2.00	U-NII-6	WLAN, 10755-AAC	6505.0, 111	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 5G Phantom	Air	EUmmWV4 - SN9639_F1-55GHz, 2022-08-24	DAE4 Sn541, 2022-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.05 x 0.05
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2022-11-19
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	2.33
psPDtot+ [W/m²]	4.25
psPDmod+ [W/m²]	6.79
E _{max} [V/m]	48.0
H _{max} [A/m]	0.366
Power Drift [dB]	0.07

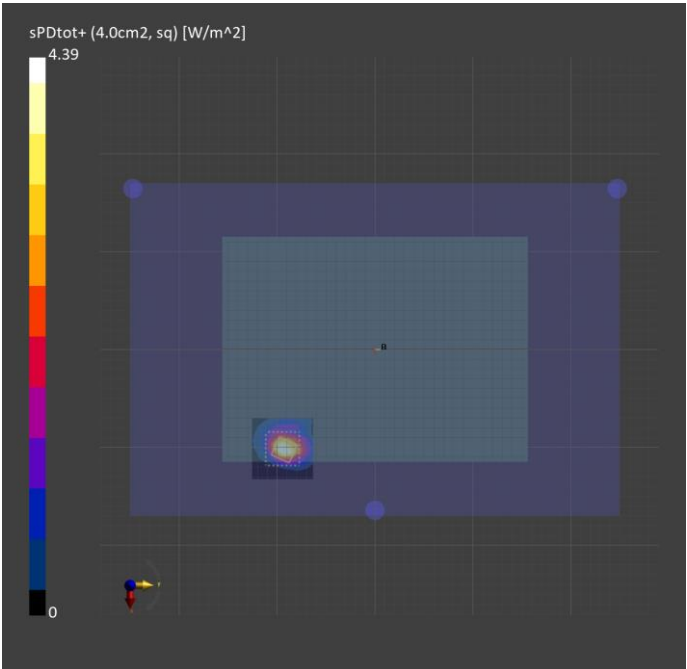

528_WLAN 6 GHz_802.11ax HE160_Ch143_Bottom Face_2 mm_ANT Main

Device under Test Properties

Model:TN3402YA

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Face, 2.00	U-NII-7	WLAN, 10755-AAC	6665.0, 143	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 5G Phantom	Air	EUmmWV4 - SN9639_F1-55GHz, 2022-08-24	DAE4 Sn541, 2022-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.05 x 0.05
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2022-11-19
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.00
psPDtot+ [W/m ²]	4.02
psPDmod+ [W/m ²]	7.00
E _{max} [V/m]	49.5
H _{max} [A/m]	0.327
Power Drift [dB]	0.18

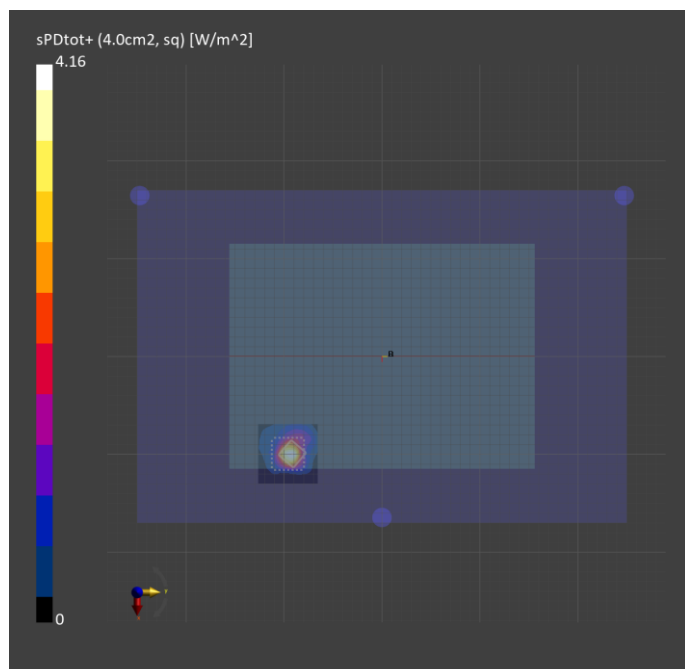

529_WLAN 6 GHz_802.11ax HE160_Ch207_Bottom Face_2 mm_ANT Main

Device under Test Properties

Model:TN3402YA

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Face, 2.00	U-NII-8	WLAN, 10755-AAC	6985.0, 207	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 5G Phantom	Air	EUmmWV4 - SN9639_F1-55GHz, 2022-08-24	DAE4 Sn541, 2022-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.05 x 0.05
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2022-11-19
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	2.33
psPDtot+ [W/m²]	4.43
psPDmod+ [W/m²]	6.17
E _{max} [V/m]	50.5
H _{max} [A/m]	0.335
Power Drift [dB]	-0.05

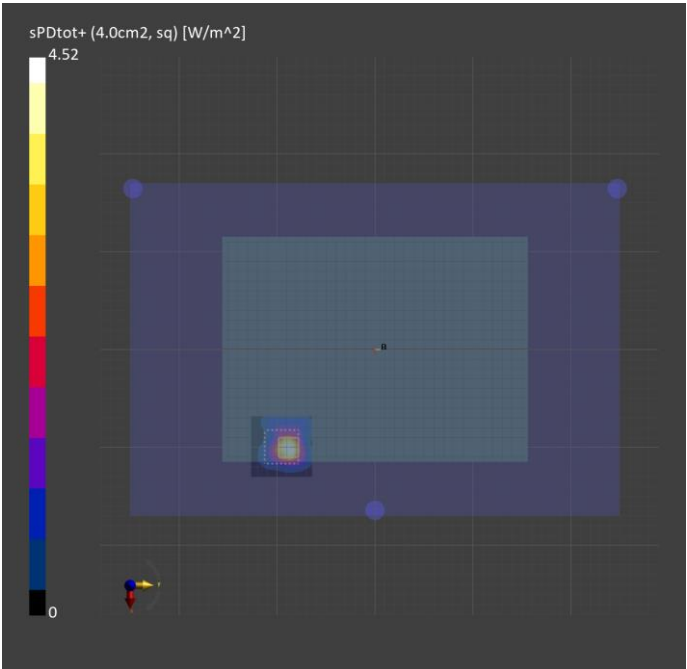

530_WLAN 6 GHz_802.11ax HE160_Ch47_Bottom Face_2 mm_ANT Aux

Device under Test Properties

Model:TN3402YA

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Face, 2.00	U-NII-5	WLAN, 10755-AAC	6185.0, 47	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 5G Phantom	Air	EUmmWV4 - SN9639_F1-55GHz, 2022-08-24	DAE4 Sn541, 2022-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.05 x 0.05
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2022-11-19
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	1.99
psPDtot+ [W/m²]	3.63
psPDmod+ [W/m²]	5.97
E _{max} [V/m]	49.7
H _{max} [A/m]	0.335
Power Drift [dB]	-0.11

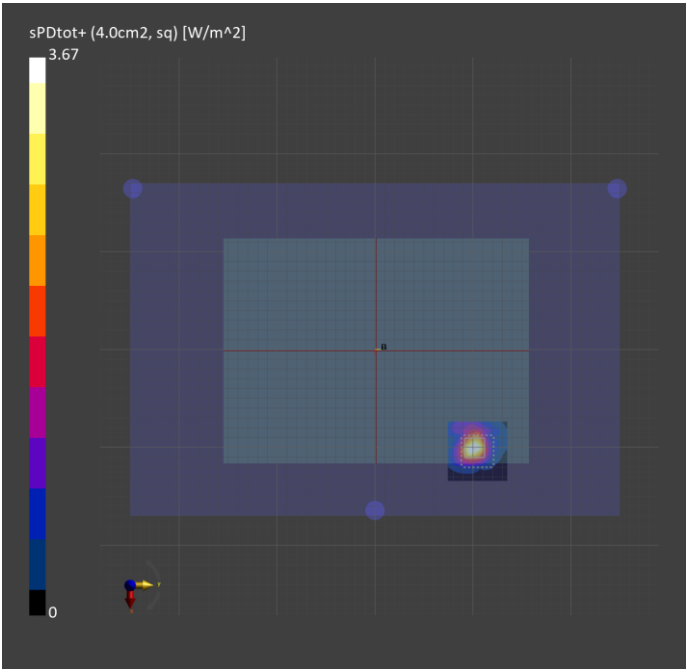

531_WLAN 6 GHz_802.11ax HE160_Ch79_Bottom Face_2 mm_ANT Aux

Device under Test Properties

Model:TN3402YA

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Face, 2.00	U-NII-5	WLAN, 10755-AAC	6345.0, 79	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 5G Phantom	Air	EUmmWV4 - SN9639_F1-55GHz, 2022-08-24	DAE4 Sn541, 2022-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.05 x 0.05
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2022-11-19
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.88
psPDtot+ [W/m ²]	3.29
psPDmod+ [W/m ²]	5.26
E _{max} [V/m]	50.5
H _{max} [A/m]	0.310
Power Drift [dB]	-0.12

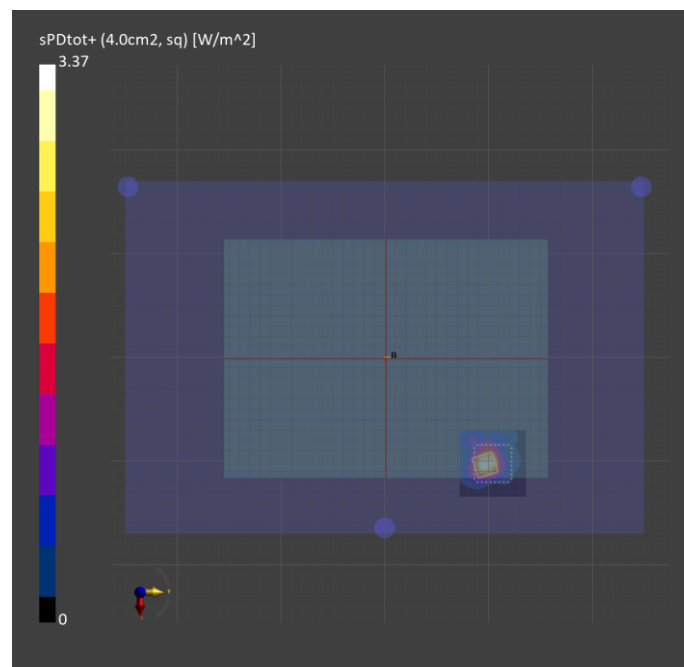

532_WLAN 6 GHz_802.11ax HE160_Ch111_Bottom Face_2 mm_ANT Aux

Device under Test Properties

Model:TN3402YA

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Face, 2.00	U-NII-6	WLAN, 10755-AAC	6505.0, 111	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 5G Phantom	Air	EUmmWV4 - SN9639_F1-55GHz, 2022-08-24	DAE4 Sn541, 2022-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.05 x 0.05
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2022-11-19
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.69
psPDtot+ [W/m ²]	2.69
psPDmod+ [W/m ²]	4.22
E _{max} [V/m]	47.2
H _{max} [A/m]	0.302
Power Drift [dB]	0.10

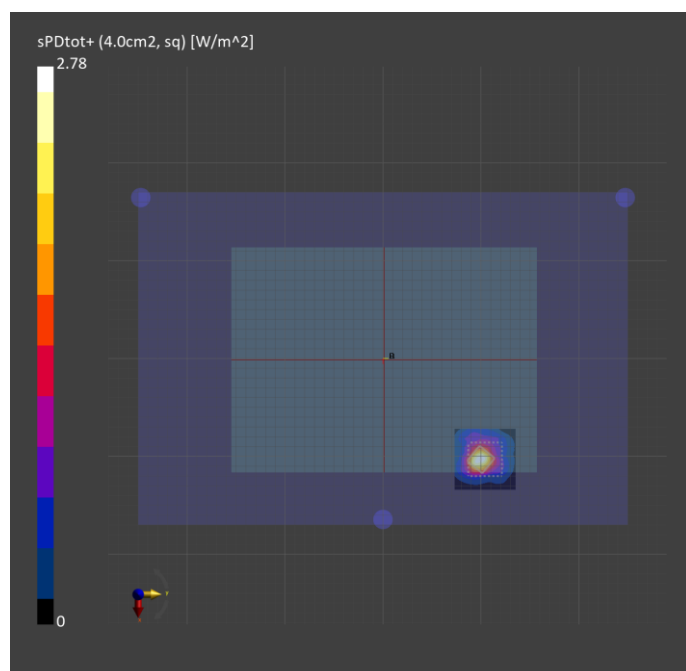

533_WLAN 6 GHz_802.11ax HE160_Ch175_Bottom Face_2 mm_ANT Aux

Device under Test Properties

Model:TN3402YA

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Face, 2.00	U-NII-7	WLAN, 10755-AAC	6825.0, 175	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 5G Phantom	Air	EUmmWV4 - SN9639_F1-55GHz, 2022-08-24	DAE4 Sn541, 2022-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.05 x 0.05
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2022-11-19
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	1.63
psPDtot+ [W/m²]	2.91
psPDmod+ [W/m²]	4.39
E _{max} [V/m]	46.3
H _{max} [A/m]	0.280
Power Drift [dB]	-0.07

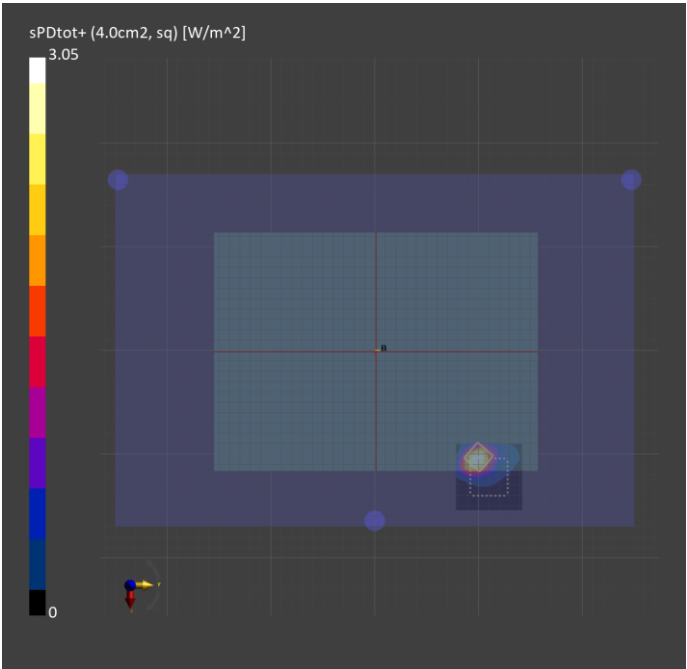

534_WLAN 6 GHz_802.11ax HE160_Ch207_Bottom Face_2 mm_ANT Aux

Device under Test Properties

Model:TN3402YA

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Face, 2.00	U-NII-8	WLAN, 10755-AAC	6985.0, 207	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 5G Phantom	Air	EUmmWV4 - SN9639_F1-55GHz, 2022-08-24	DAE4 Sn541, 2022-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.05 x 0.05
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2022-11-19
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	1.94
psPDtot+ [W/m²]	3.91
psPDmod+ [W/m²]	5.82
E _{max} [V/m]	55.8
H _{max} [A/m]	0.421
Power Drift [dB]	0.05

