

ANTENNA INFORMATION

OEM	Lenovo
ODM	LCFC
Platform model name	Legion 5 15IRX10 Legion 5 15IAX10 Legion 5 15AHP10 Legion 5 15AKP10
Intel platform (ex: Yes, No or NA)	IRX/IAX: Yes AHP/AKP: No
Platform type (ex: regular NB, convertible PC, AIO...etc)	Regular NB
SAR minimum separation (mm)	FCC (1g) 9.4 ISED (1g) 5.0 ISED (10g) 3.35

Antenna manufacturer	Company name	INPAQ
	Address	No.5, Chunqiu Road, Panyang Industrial Park, Huangdai Town, Xiangcheng Zone, Suzhou City 215143 ,Jiangsu Province, China
Test location	Company name	INPAQ
	Address	No.5, Chunqiu Road, Panyang Industrial Park, Huangdai Town, Xiangcheng Zone, Suzhou City 215143 ,Jiangsu Province, China
Test Personnel	Name(Full name)	Anduin_zhang
	E-mail	Anduin_zhang@inpaqgp.com
	Tel/Mobile	13390842623
Testing date		2025/02/25

Antenna Part number	Main	DC330027H00
	Aux	DC330027H00
Antenna type (ex: PIFA, Dipole...etc)		PIFA

Antenna Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	2.54	1.91	1.68	2.73	2.71	2.71	2.61	1.38	1.28	1.84
Aux	1.42	1.34	1.34	1.67	1.13	1.04	2.73	1.83	1.62	-0.33

Cable Assembly Part Number and Information					
	Cable PN	Cable length(mm)	Cable diameter(mm)	Impedance(ohm)	Connector type
Main	SY113L/50-048	148	OD 1.13	50	IPEX
Aux	SY113L/50-050	397	OD 1.13	50	IPEX

* 3D Antenna Peak Gain required being test in system basis.

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
(P/N: DC330027H00) Main Antenna	INPAQ	PIFA	Connector Type: IPEX (Connector P/N: MHF-B13L-N-01) 50ohm Coaxial length: 148mm diameter: 1.13mm	2400-2483.5	2.54	3.04	1.6	0.5
				5150-5250	1.91	2.93	1.9	1.02
				5250-5350	1.68	2.78	2.0	1.1
				5470-5725	2.73	3.96	1.3	1.23
				5725-5850	2.71	3.99	1.4	1.28
				5850-5895	2.71	4.06	1.3	1.35
				5925-6425	2.61	3.99	1.3	1.38
				6425-6525	1.38	2.79	1.8	1.41
				6525-6875	1.28	2.70	2.0	1.42
				6875-7125	1.84	3.29	2.2	1.45
(P/N:DC330027H00) Aux Antenna	INPAQ	PIFA	Connector Type: IPEX (Connector P/N: MHF-B13L-N-01) 50ohm Coaxial length: 397mm diameter: 1.13mm	2400-2483.5	1.42	2.55	1.6	1.13
				5150-5250	1.34	3.21	2.4	1.87
				5250-5350	1.34	3.25	1.9	1.91
				5470-5725	1.67	3.62	1.5	1.95
				5725-5850	1.13	3.18	1.3	2.05
				5850-5895	1.04	3.14	1.5	2.1
				5925-6425	2.73	4.90	1.6	2.17
				6425-6525	1.83	4.09	1.9	2.26
				6525-6875	1.62	4.06	2.1	2.44
				6875-7125	-0.33	2.42	2.3	2.75

- 3D Antenna Peak Gain required being test in system basis.

Table of Contents

Cover page.....	1
1. Intel Reference Gain and Type.....	3
2. Document Revision History.....	3
3. Test & System Description	
3.1 Measurement Method and System.....	4
3.2 Test setup.....	4
3.3 Equipment list.....	5
4. Radiation characteristics of antenna loaded in Host Platform.....	6
Annex A. Photographs	
A.1 Setup Photo.....	16
A.2 Test sample.....	17
Annex B. Antenna Location	
B.1 Antenna Host Platform Location Information.....	19
B.2 Antenna dimensional information for SAR evaluation.....	20

1. Intel Reference Gain and Type

Antenna Peak gain w/ cable loss (dBi)											
Band/Frequency		2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Design	EU/UK	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
PIFA	For WiFi 6E and earlier	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59
	From WiFi 7	2.95	5.11	4.55	5.15	5.13	4.45	5.02	5.02	4.96	4.96
Dipole	For WiFi 6E and earlier	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34
	From WiFi 7	2.95	4.03	4.11	5.15	5.13	4.45	5.02	4.71	4.49	4.96
Monopole	From WiFi 7	2.83	4.57	4.44	4.95	4.95	4.43	4.87	4.91	4.91	4.79

3D Peak Antenna gain should be equal or greater than -2dBi

If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.

2. Document Revision History


Revision #	Revision Details	Issued Date
Rev. 00	First Issue	2025/2/28

3. Test & System Description

3.1 Measurement Method and System

1. Use a low-loss coaxial cable to connect the notebook fixture
2. Fix the notebook fixture on the turntable
3. Connect the jig to the network analyzer port, and use the antenna of the test probe to collect data.

3.2 Test setup

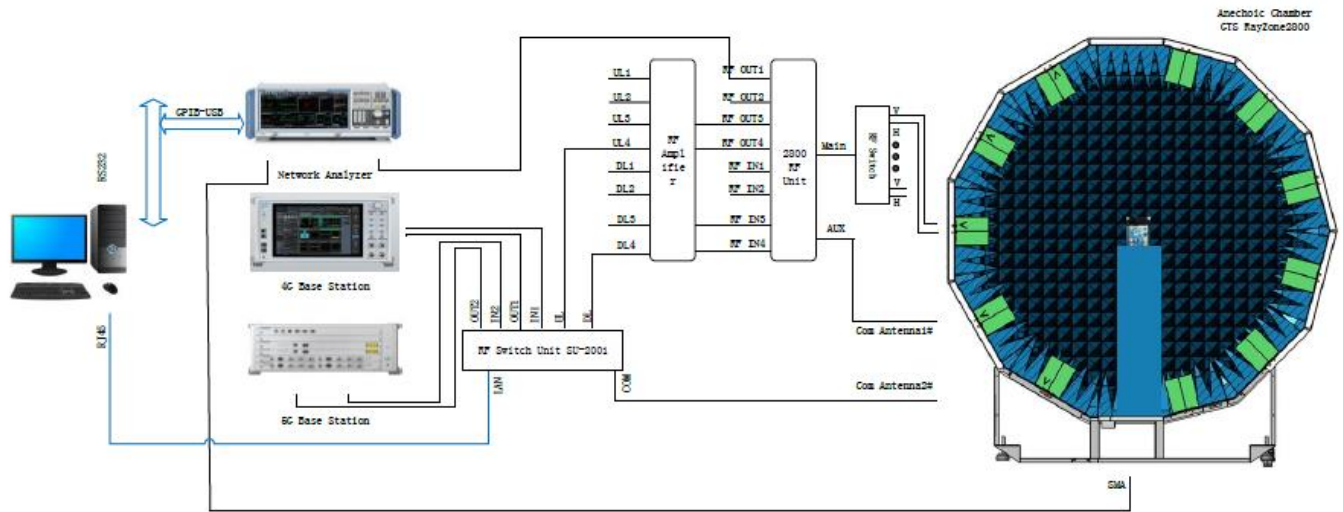

3.3 Equipment list


Number	Device	Manufacturer	Cal.Date	Cal.Due.Date
1	Anechoic Chamber	GTS	2024/5/13	2025/5/12
2	measurement antenna	GTS	2024/5/13	2025/5/12
3	Network Analyzer	Keysight	2024/5/13	2025/5/12
4	turn table control box	GTS	N/A	N/A
5	turn table control computer	GTS	N/A	N/A
6	test system host	GTS	N/A	N/A
7	RF line TX	Times	N/A	N/A
8	RF line RX	Times	N/A	N/A
9	cable 2m 1GHz-8.5GHz	Times	N/A	N/A
10	optical fiber line	Times	N/A	N/A

4. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.54

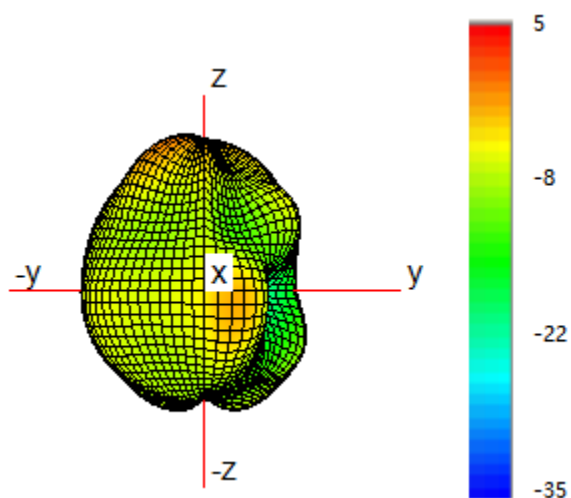


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.91

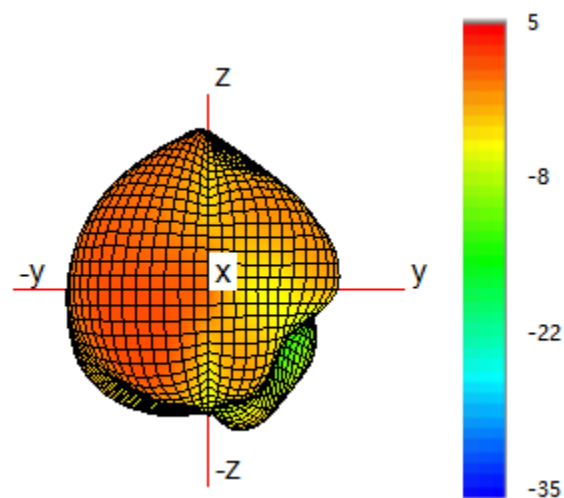


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.68

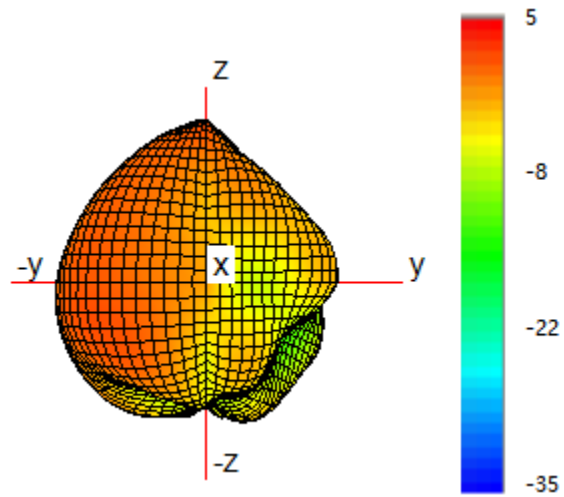


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.73

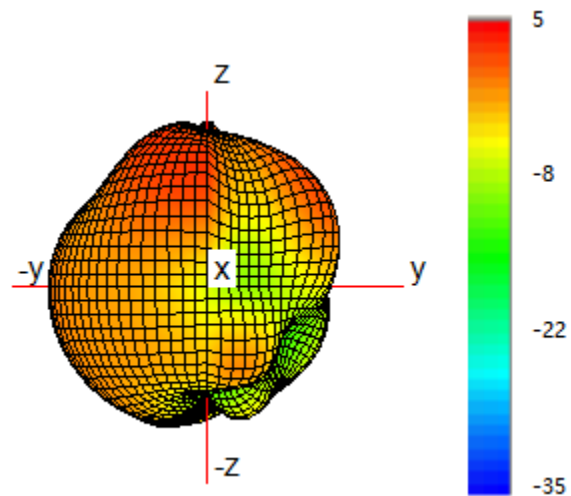


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.71

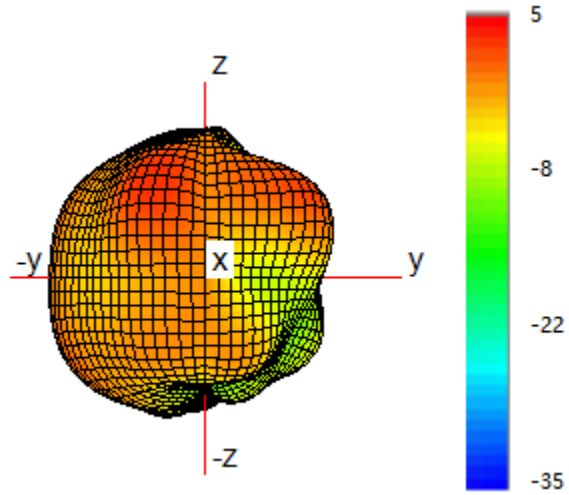


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	2.71

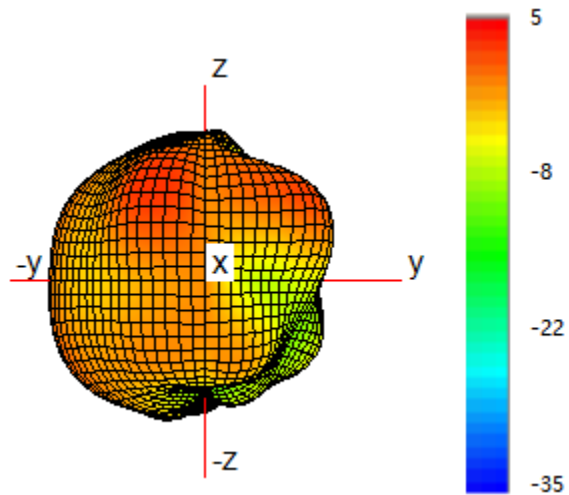


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.61

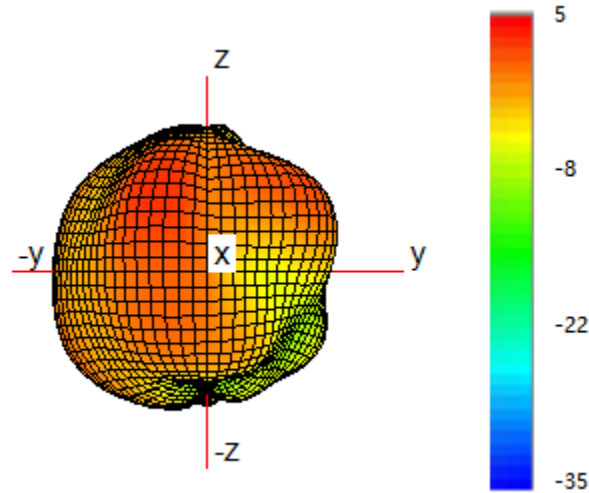


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	1.38

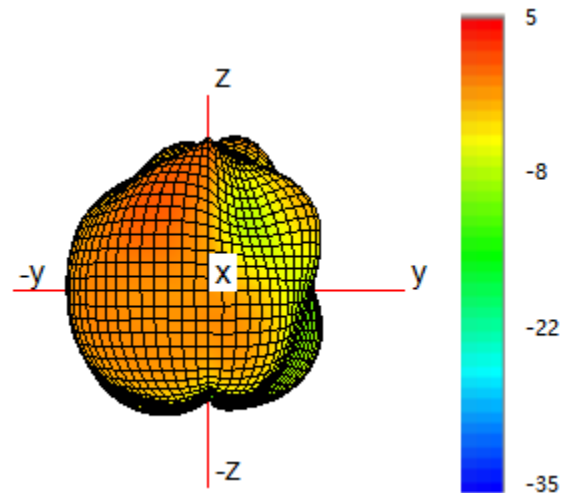


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	1.28

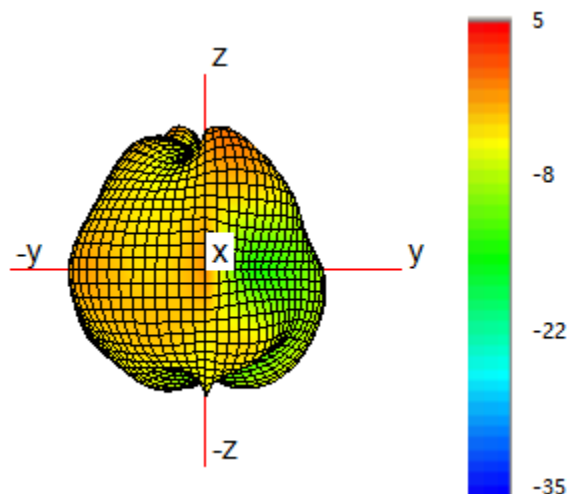

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	1.84

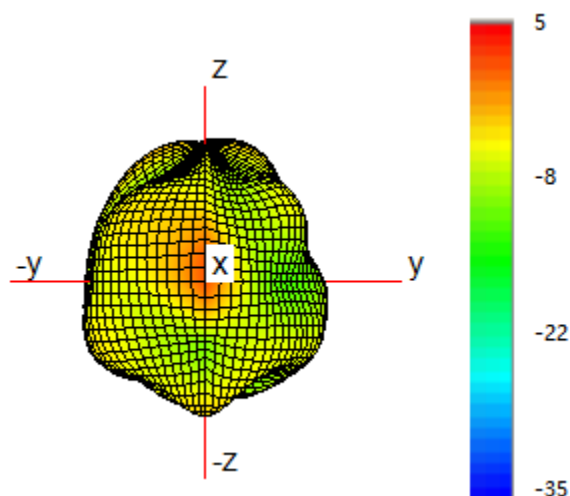

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.42

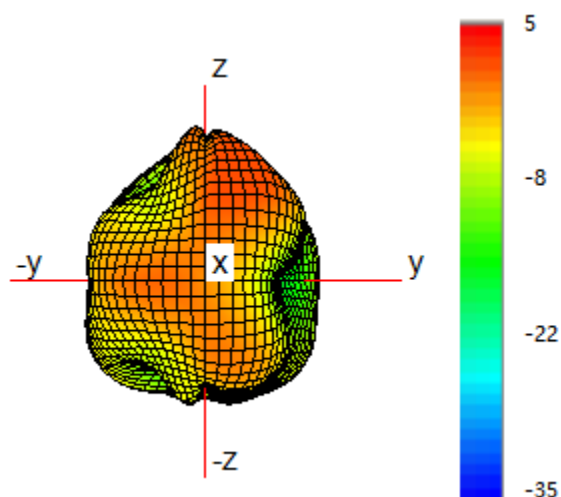


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.34

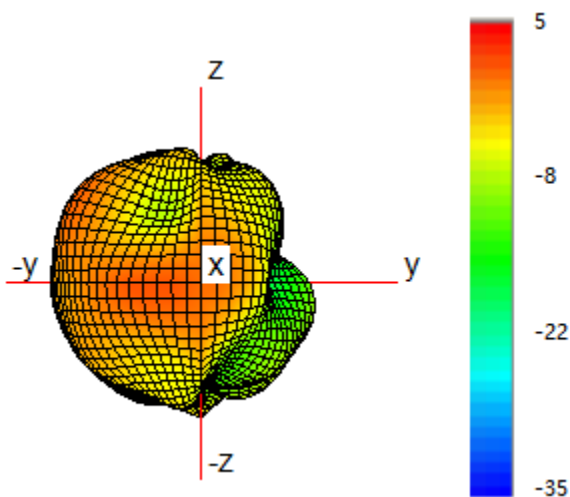


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.34

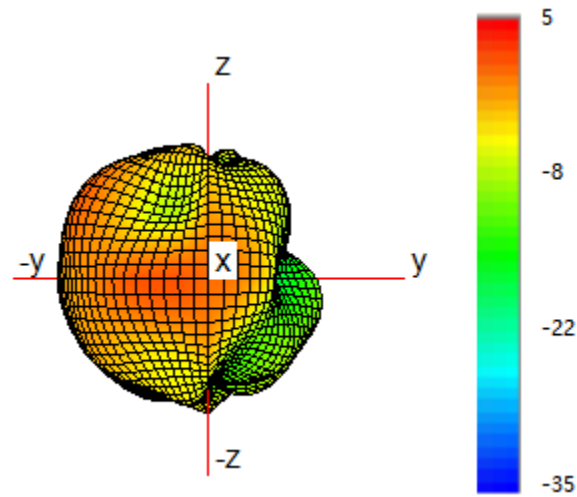


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.67

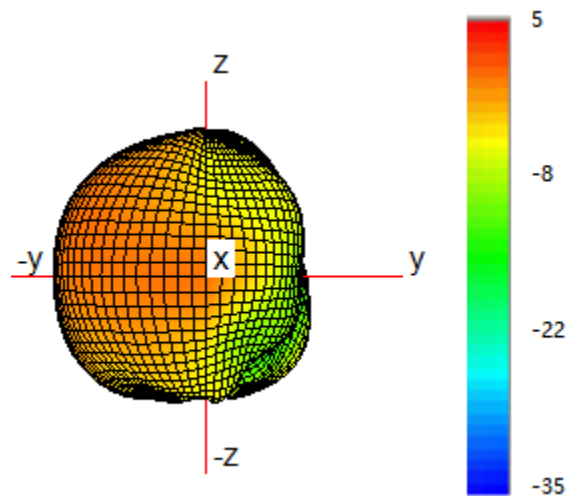


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	1.13

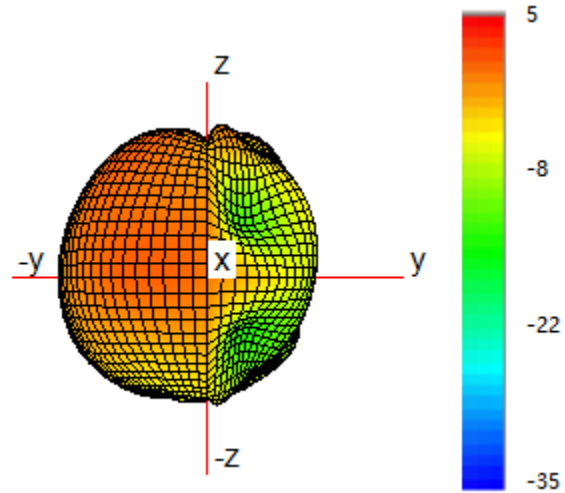


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	1.04

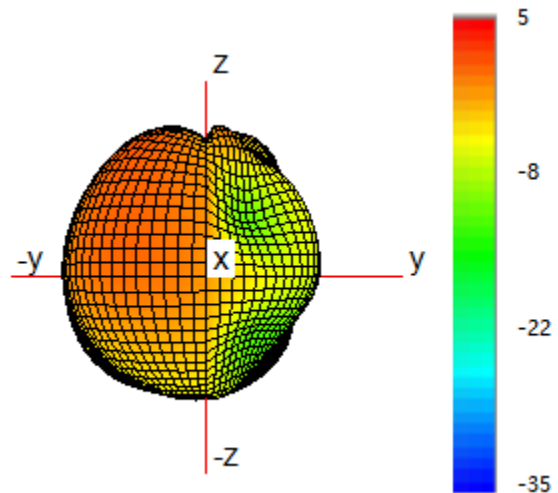


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.73

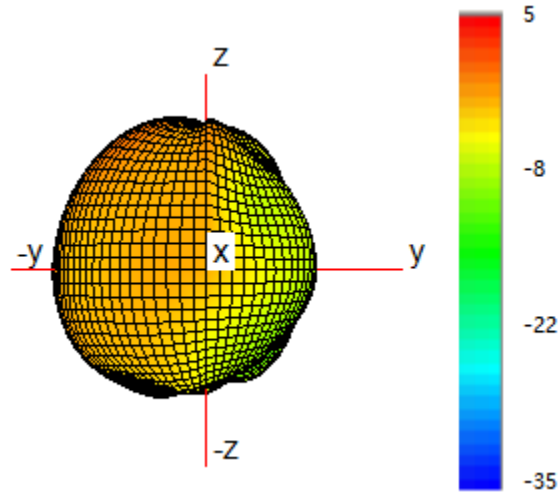


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	1.83

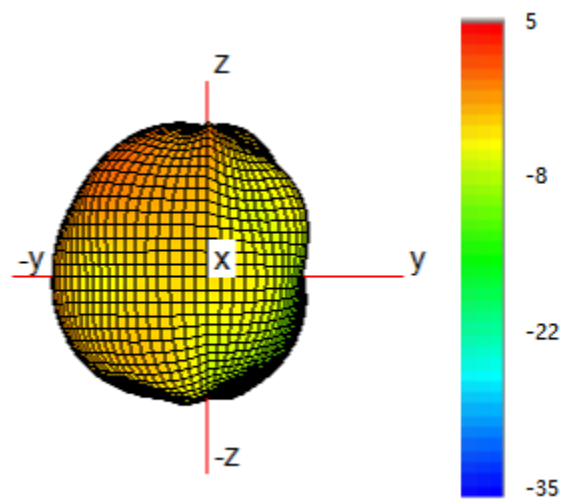


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	1.62

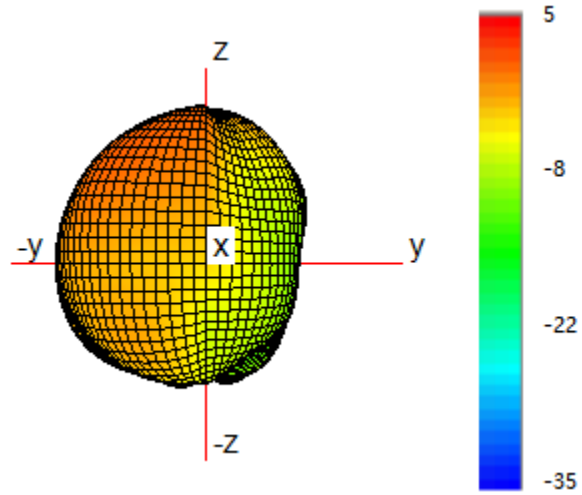


Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	-0.33

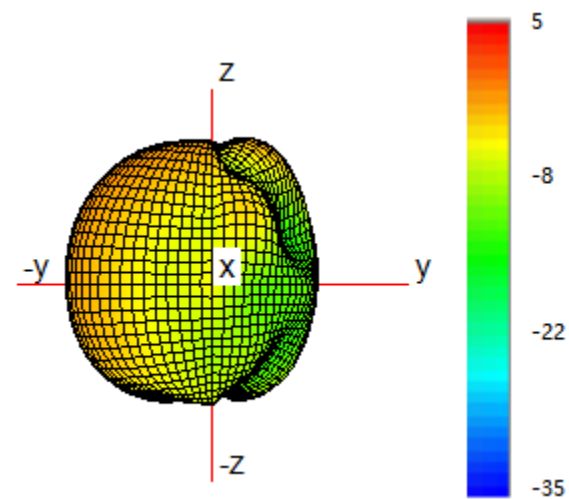


Annex A. Photographs




A.1 Setup Photo

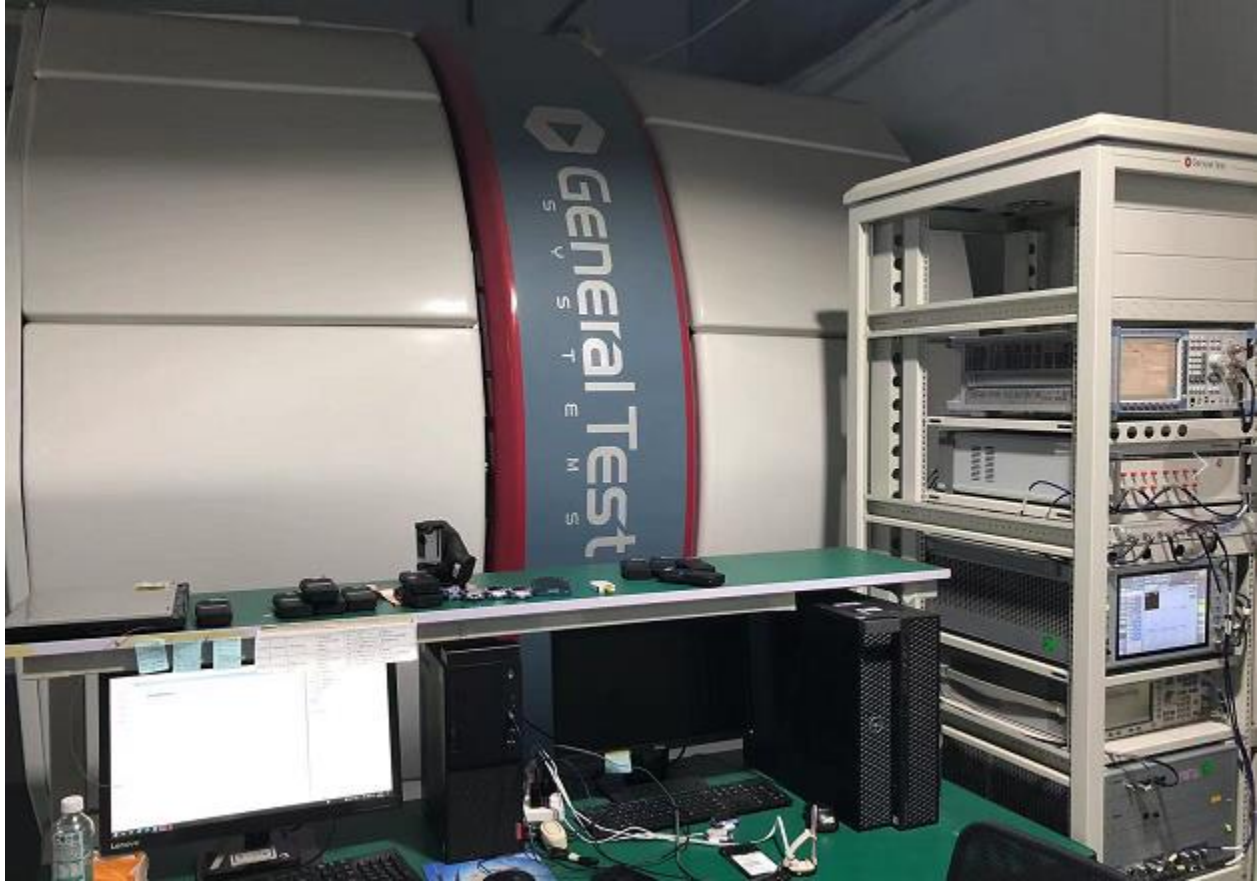

Antenna Drawing

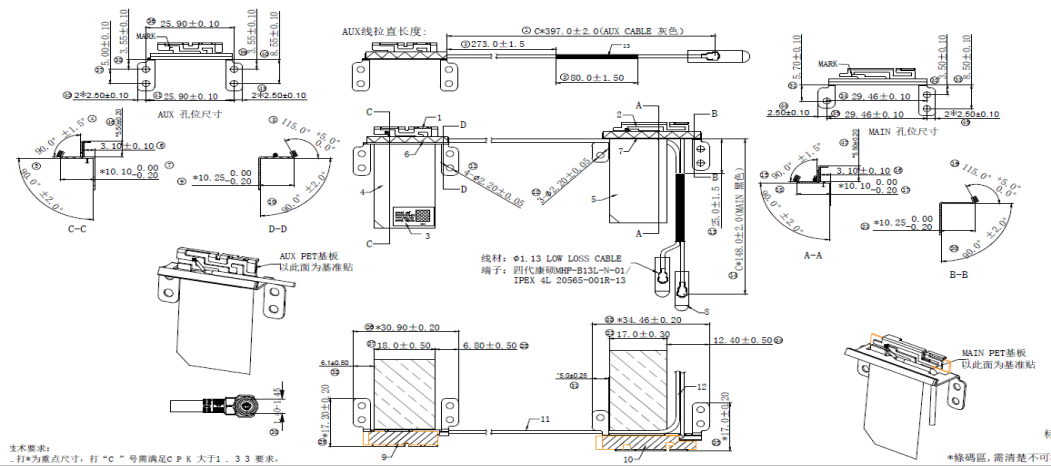


Front

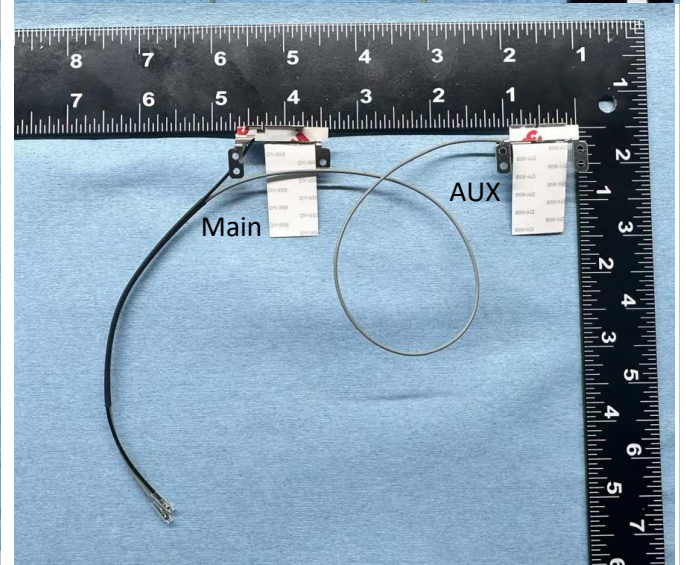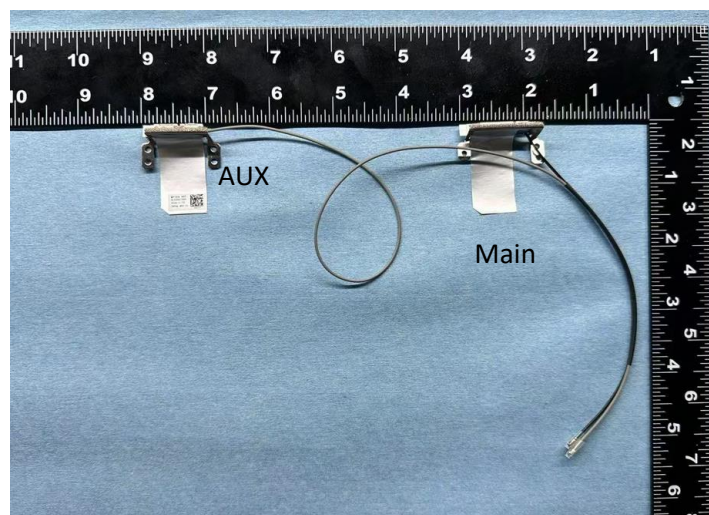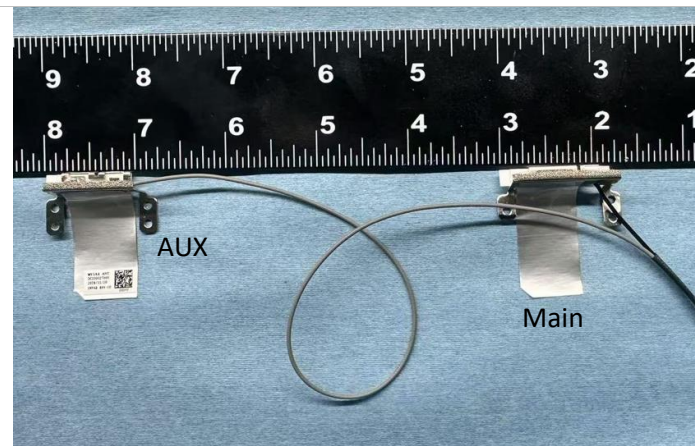


Aux Antenna

Antenna Drawing



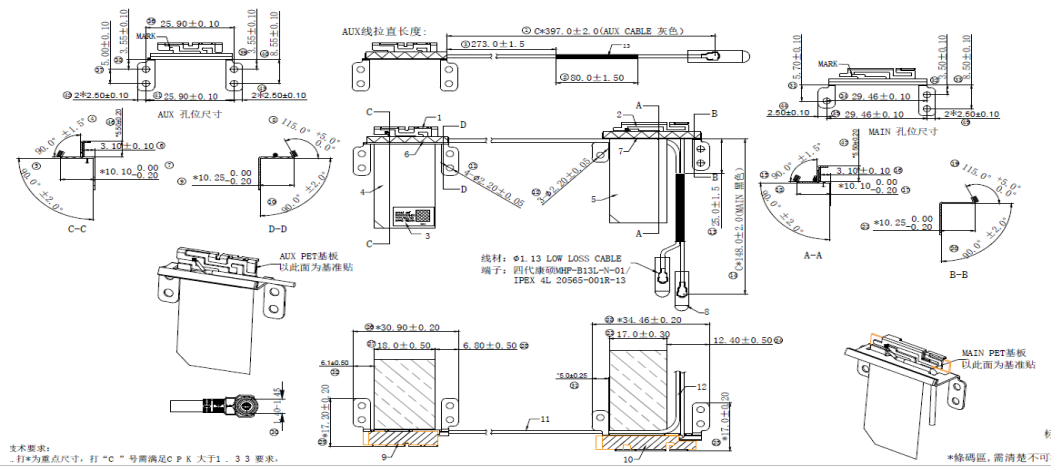


Antenna Photo

Front

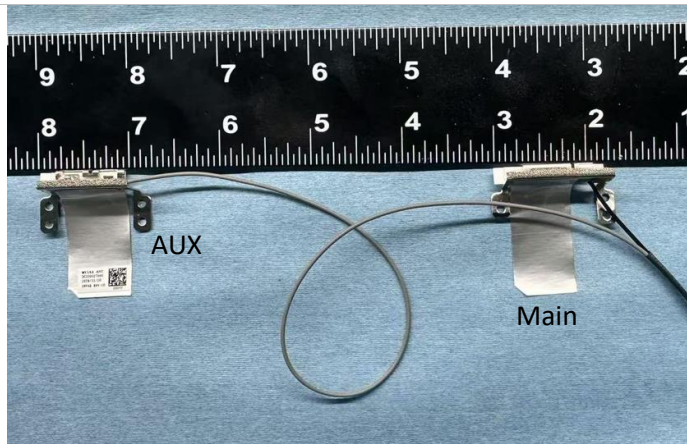

[Back](#)

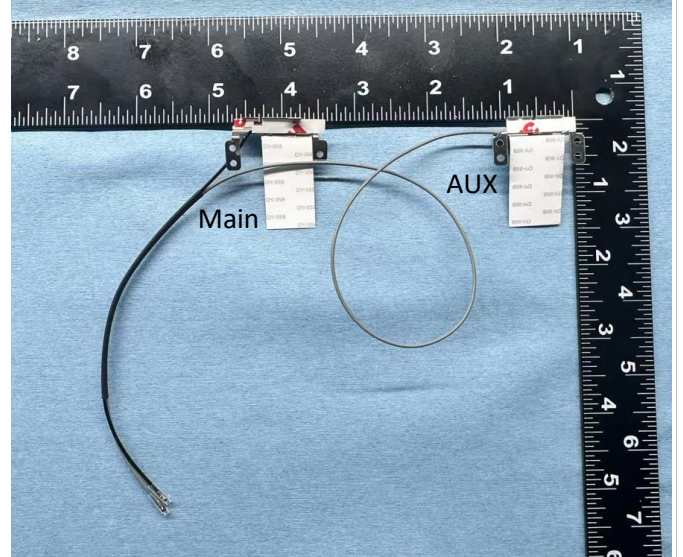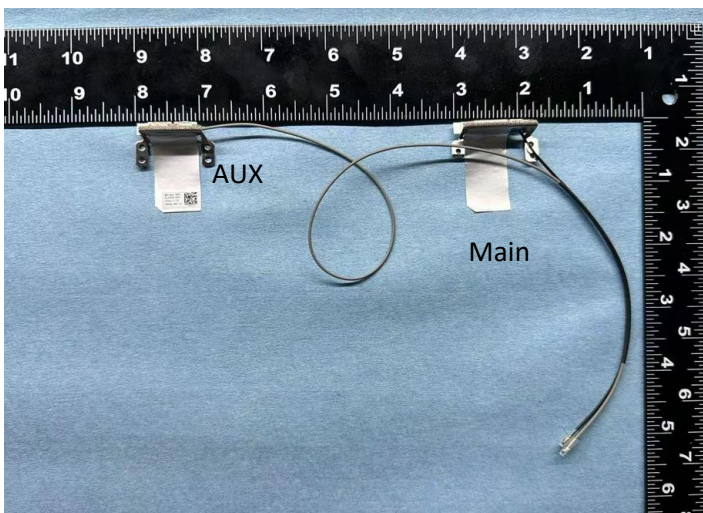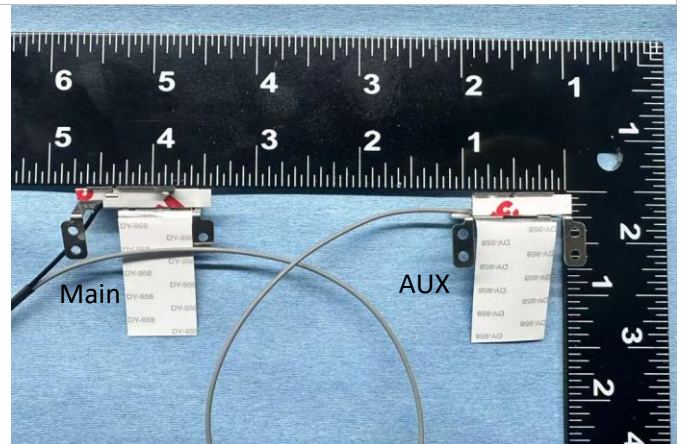


Annex B. Antenna Location

B.1 Antenna Host Platform Location Information

Include a dimensioned photo(s) or dimensioned drawing(s) of Main and Aux antenna placements (measurements are not required for receive-only antenna).


Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

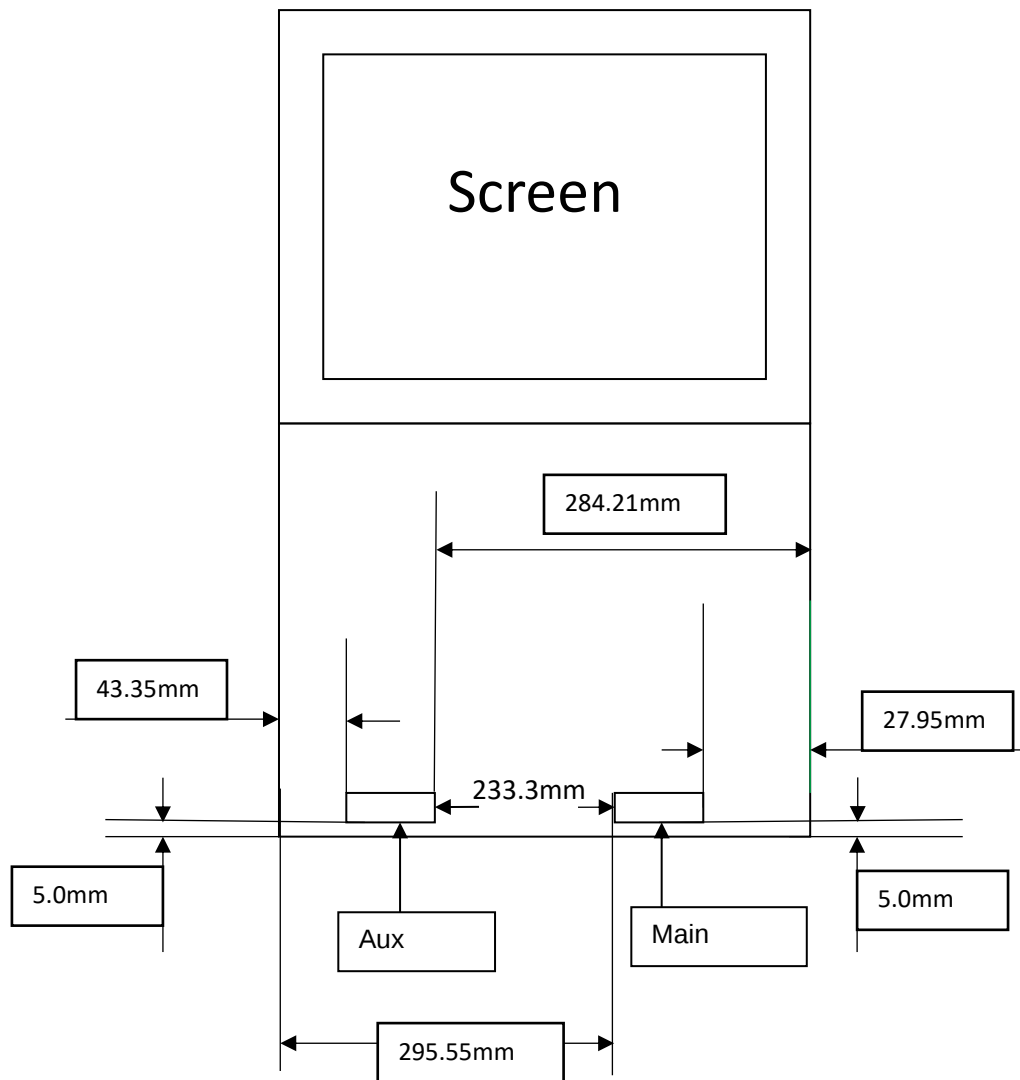

B.2 Antenna dimensional information for SAR evaluation

Include a dimensioned photo(s) or dimensioned drawing(s) showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

Antennas on the keyboard section

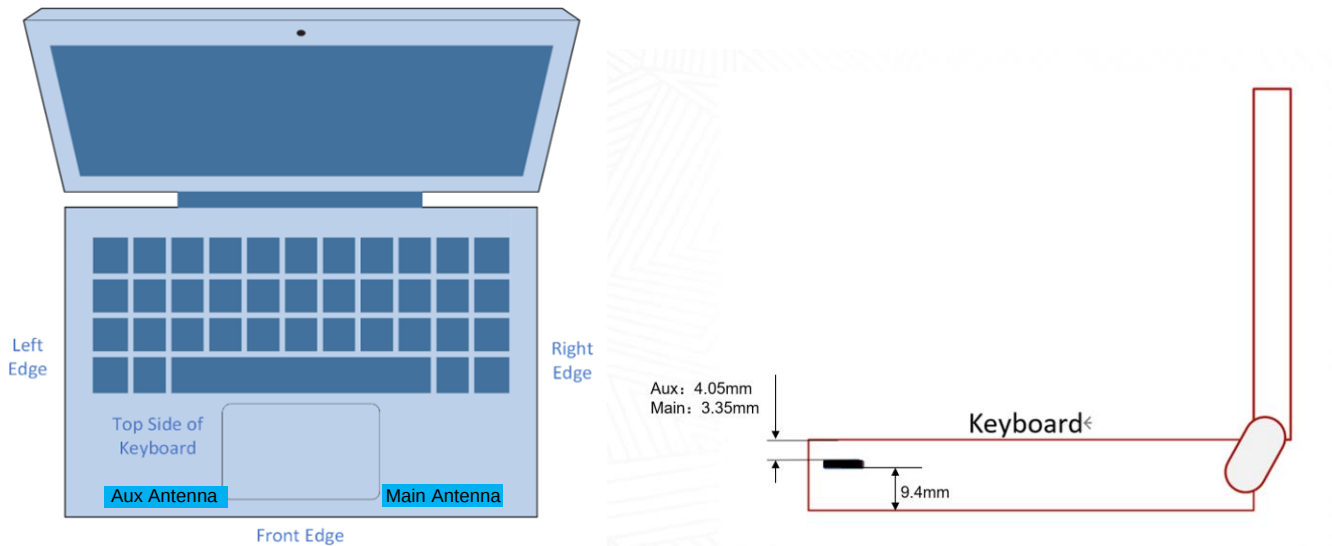

Measuring Surface	Antenna	Separation Distance(antenna-to-Surface)(mm)	1g or 10g SAR
Bottom Side	Main	9.4	1g (FCC/ISED)
	Aux	9.4	1g (FCC/ISED)
Front Edge	Main	5.0	1g (ISED)
	Aux	5.0	1g (ISED)
Left Edge	Main	295.55	10g (ISED)
	Aux	43.35	10g (ISED)
Right Edge	Main	27.95	10g (ISED)
	Aux	284.21	10g (ISED)
Top side of Keyboard	Main	3.35	10g (ISED)
	Aux	4.05	10g (ISED)