

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom of Laptop_0mm_Ch1;Ant 1+2

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1.019

Medium: HSL_2450_211217 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.729$ S/m; $\epsilon_r = 39.145$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration

- Probe: EX3DV4 - SN7590; ConvF(7.94, 7.94, 7.94) @ 2412 MHz; Calibrated: 2021/3/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2021/7/14
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x301x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.541 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.24 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.503 W/kg


Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.24 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.236 W/kg

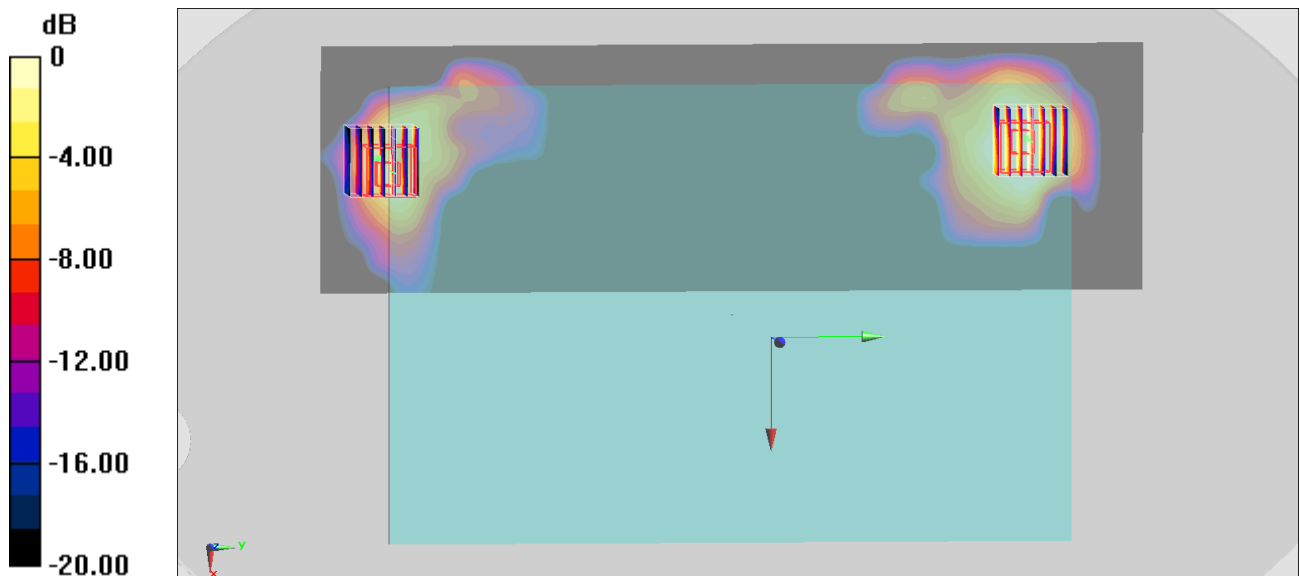

0 dB = 0.236 W/kg = -6.27 dBW/kg

#02_WLAN5GHz_802.11ac-VHT160 MCS0_Bottom of Laptop_0mm_Ch50;Ant 1+2

Communication System: 802.11ac; Frequency: 5250 MHz; Duty Cycle: 1:1.003

Medium: HSL_5G_211217 Medium parameters used : $f = 5250$ MHz; $\sigma = 4.625$ S/m; $\epsilon_r = 35.532$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration

- Probe: EX3DV4 - SN7590; ConvF(5.54, 5.54, 5.54) @ 5250 MHz; Calibrated: 2021/3/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2021/7/14
- Phantom: ELI V4.0; Type: QDOVA001BB; Serial: 1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (111x361x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.20 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 9.681 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 1.17 W/kg


Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 9.681 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.380 W/kg

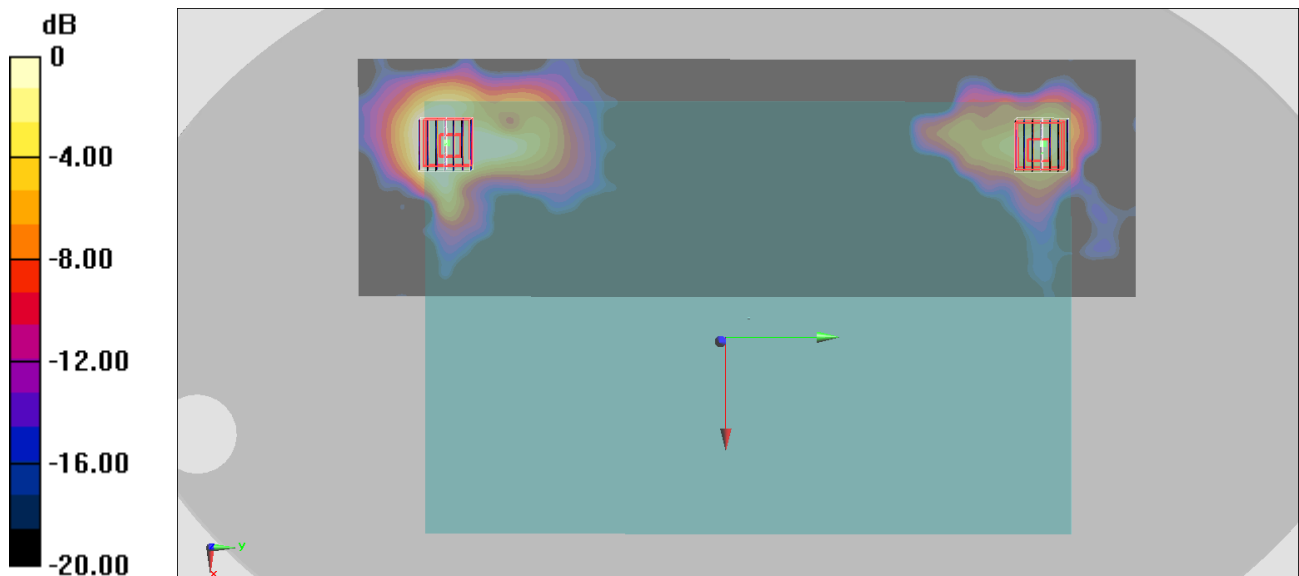

0 dB = 0.380 W/kg = -4.20 dBW/kg

#03_WLAN5GHz_802.11ac-VHT160 MCS0_Bottom of Laptop_0mm_Ch114;Ant 1+2

Communication System: 802.11ac; Frequency: 5570 MHz; Duty Cycle: 1:1.003

Medium: HSL_5G_211218 Medium parameters used : $f = 5570$ MHz; $\sigma = 4.993$ S/m; $\epsilon_r = 34.988$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration

- Probe: EX3DV4 - SN7590; ConvF(5.02, 5.02, 5.02) @ 5570 MHz; Calibrated: 2021/3/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2021/7/14
- Phantom: ELI V4.0; Type: QDOVA001BB; Serial: 1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (121x361x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.647 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 7.988 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.673 W/kg


Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 7.988 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.352 W/kg

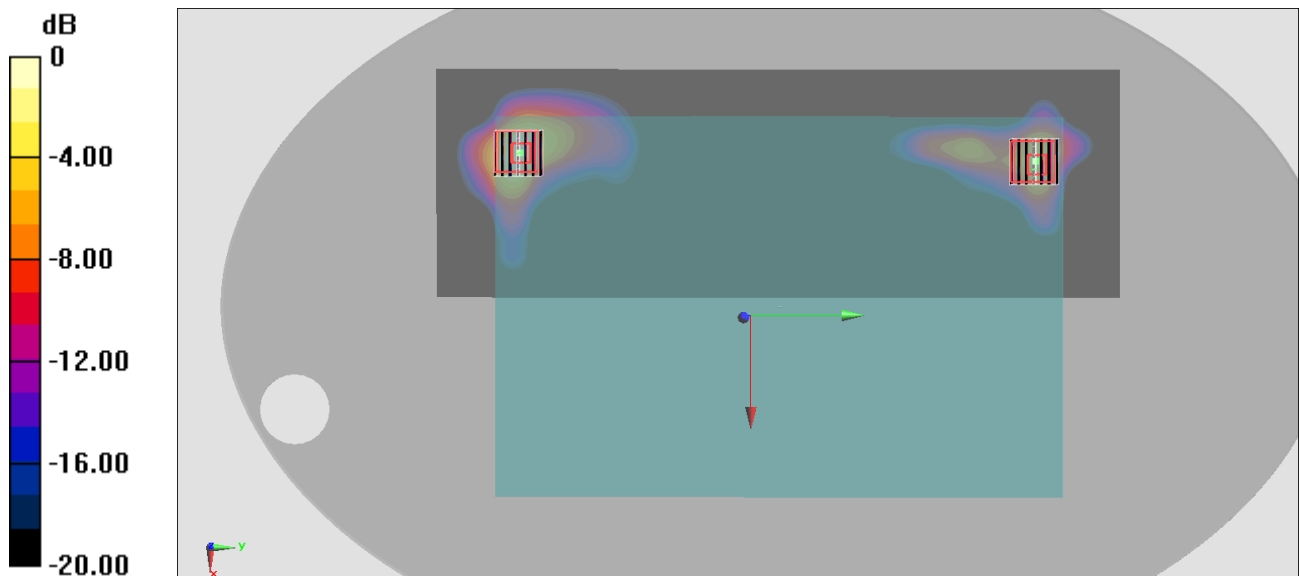

0 dB = 0.673 W/kg = -1.72 dBW/kg

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom of Laptop_0mm_Ch155;Ant 1+2

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.003

Medium: HSL_5G_211218 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.233$ S/m; $\epsilon_r = 34.582$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration

- Probe: EX3DV4 - SN7590; ConvF(5.27, 5.27, 5.27) @ 5775 MHz; Calibrated: 2021/3/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2021/7/14
- Phantom: ELI V4.0; Type: QDOVA001BB; Serial: 1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (121x361x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.445 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.16 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.890 W/kg


Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.16 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.577 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.299 W/kg

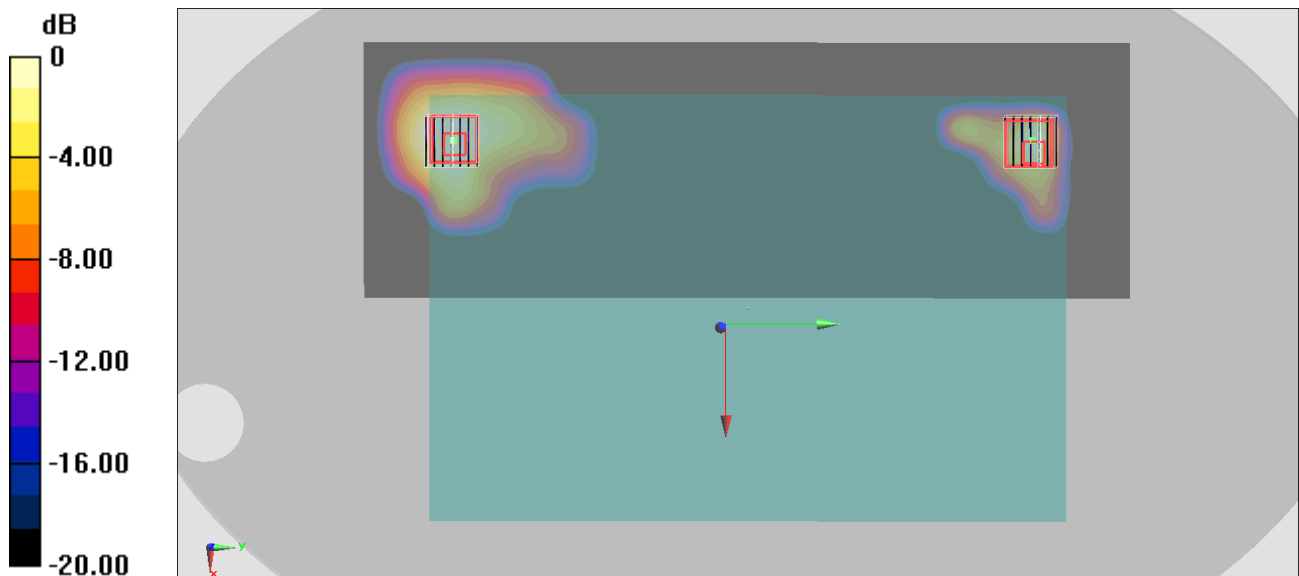

0 dB = 0.299 W/kg = -5.24 dBW/kg

#05_Bluetooth_1Mbps_Bottom of Laptop_0mm_Ch78;Ant 2

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.301

Medium: HSL_2450_211217 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.785$ S/m; $\epsilon_r = 38.864$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration

- Probe: EX3DV4 - SN7590; ConvF(7.94, 7.94, 7.94) @ 2480 MHz; Calibrated: 2021/3/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2021/7/14
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0872 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.197 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0962 W/kg

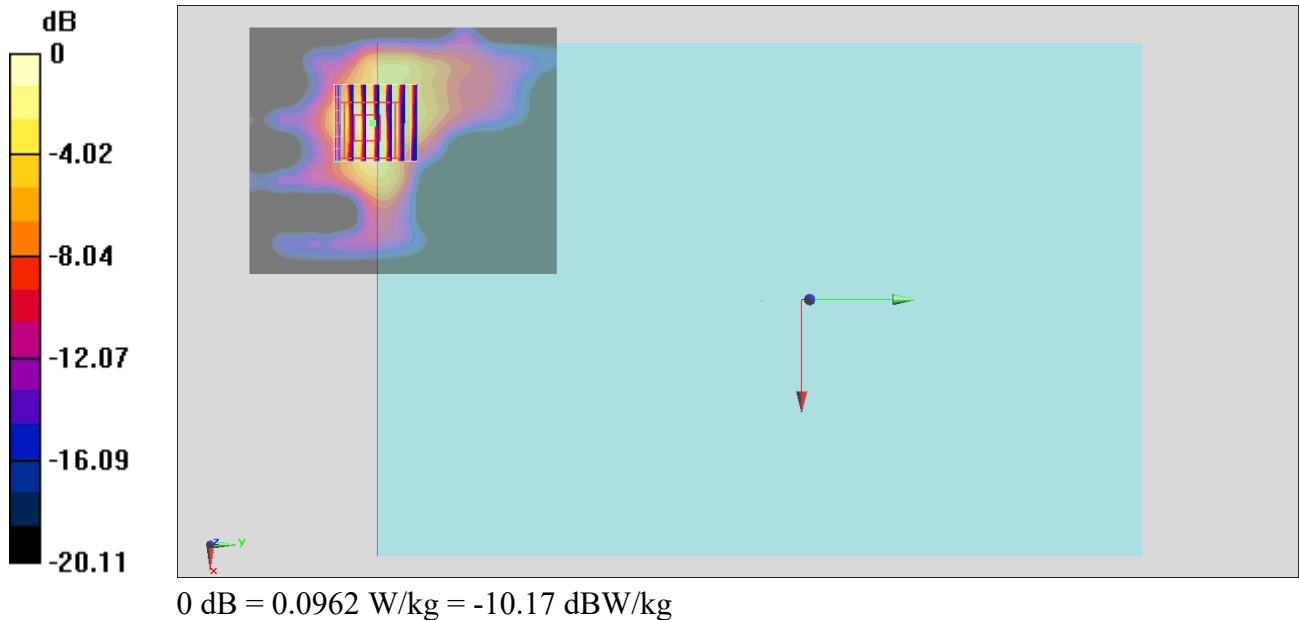

#06_WLAN6GHz_802.11ax-HE160 MCS0_Bottom of Laptop_0mm_Ch207;Ant 1+2

Communication System: Custom Band; Frequency: 6985.0

Medium: HSL_6G_211218 Medium parameters used: $f = 6985.0$ MHz; $\sigma = 6.67$ S/m; $\epsilon_r = 34.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(5.75, 5.75, 5.75); Calibrated: 2021-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2021-08-19
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: CW, 10456-AAB
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (102.0 mm x 323.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.144 W/kg; SAR (10g) = 0.039 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.165 W/kg; SAR (10g) = 0.040 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.039 W/kg; SAR (10g) = 0.010 W/kg;

