

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom of Laptop_0mm_Ch1;Ant 1+2

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1.003

Medium: HSL_2450_230223 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.779$ S/m; $\epsilon_r = 40.316$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.58, 8.58, 8.58) @ 2412 MHz; Calibrated: 2022/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x181x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.204 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.73 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.334 W/kg

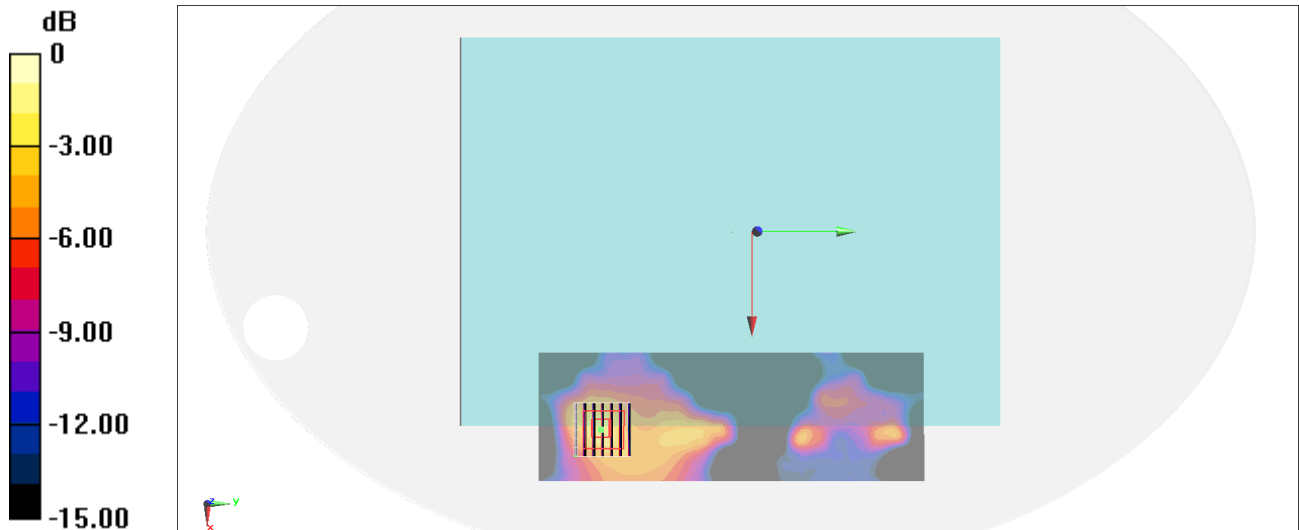

#02_WLAN5GHz_802.11n-HT40 MCS0_Bottom of Laptop_0mm_Ch54;Ant 1+2

Communication System: 802.11n; Frequency: 5270 MHz; Duty Cycle: 1:1.053

Medium: HSL_5G_230223 Medium parameters used: $f = 5270$ MHz; $\sigma = 4.785$ S/m; $\epsilon_r = 36.543$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.48, 5.48, 5.48) @ 5270 MHz; Calibrated: 2022/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x241x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.476 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 9.246 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.377 W/kg

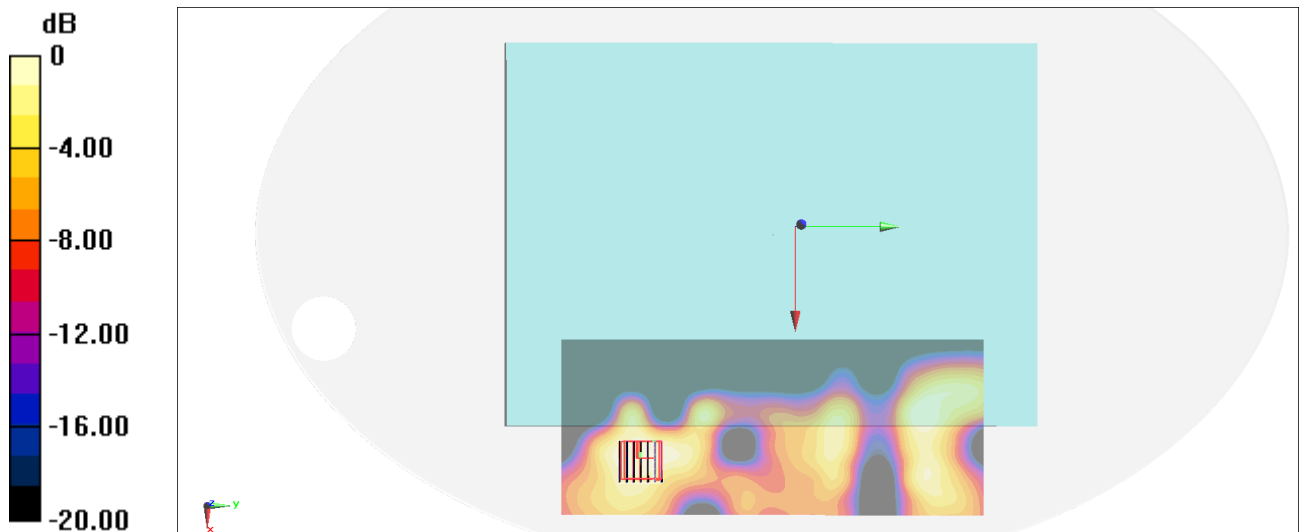

0 dB = 0.377 W/kg = -4.24 dBW/kg

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom of Laptop_0mm_Ch138;Ant 1+2

Communication System: 802.11ac; Frequency: 5690 MHz; Duty Cycle: 1:1.104

Medium: HSL_5G_230223 Medium parameters used : $f = 5690$ MHz; $\sigma = 5.205$ S/m; $\epsilon_r = 35.993$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.01, 5.01, 5.01) @ 5690 MHz; Calibrated: 2022/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x241x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.386 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 9.191 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.245 W/kg

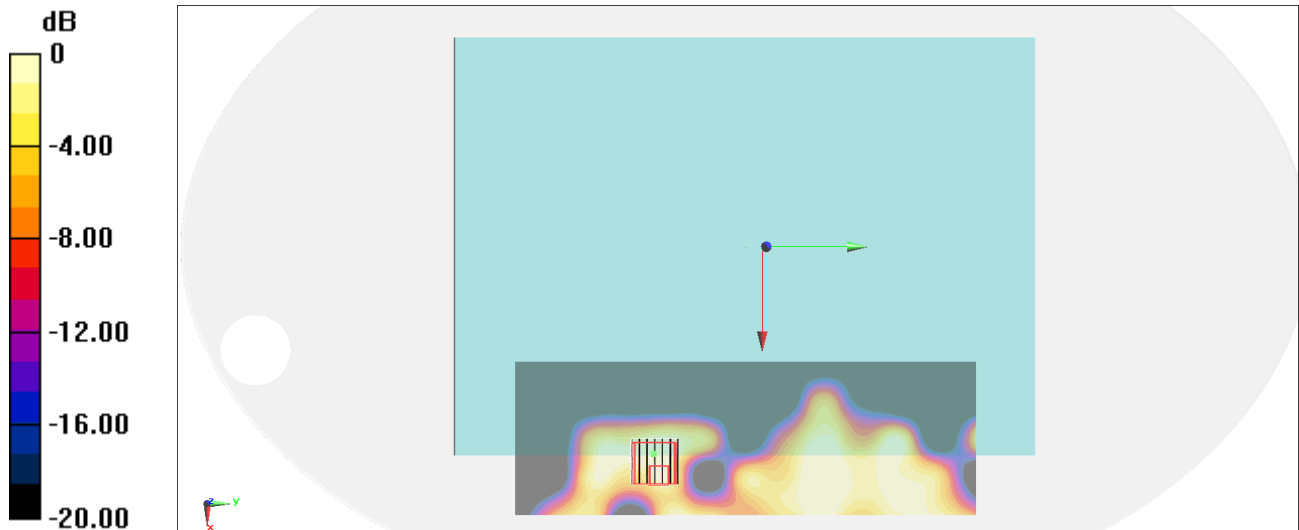

#04_WLAN5GHz_802.11a 6Mbps_Bottom of Laptop_0mm_Ch149;Ant 1+2

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.025

Medium: HSL_5G_230223 Medium parameters used : $f = 5745$ MHz; $\sigma = 5.289$ S/m; $\epsilon_r = 35.898$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.01, 5.01, 5.01) @ 5745 MHz; Calibrated: 2022/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x241x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.740 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 12.97 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.796 W/kg

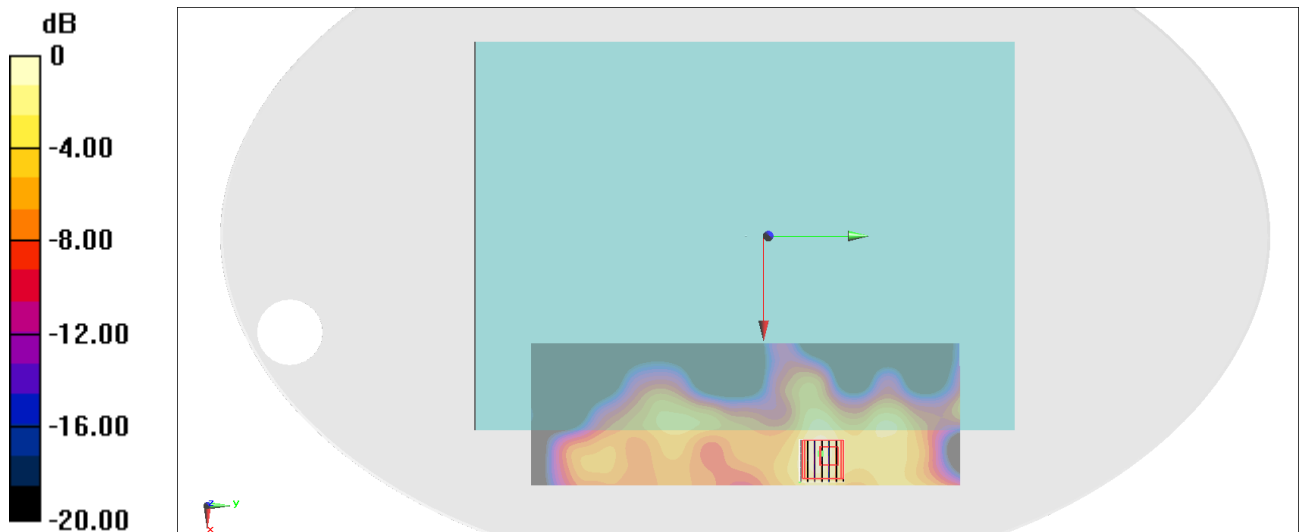

0 dB = 0.796 W/kg = -0.99 dBW/kg

#05_WLAN6GHz_802.11ax-HE160 MCS0_Bottom of Laptop_0mm_Ch15;Ant 1+2

Communication System: 802.11ax ; Frequency: 6025.0 MHz; Duty Cycle: 1:1.111

Medium: HSL_6G_230228 Medium parameters used: $f = 6025.0$ MHz; $\sigma = 5.44$ S/m; $\epsilon_r = 35.5$


Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(5.0, 5.0, 5.0); Calibrated: 2022-04-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2022-08-24
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10755-AAC

Area Scan (102.0 mm x 238.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0 W/kg; SAR (10g) = 0 W/kg;

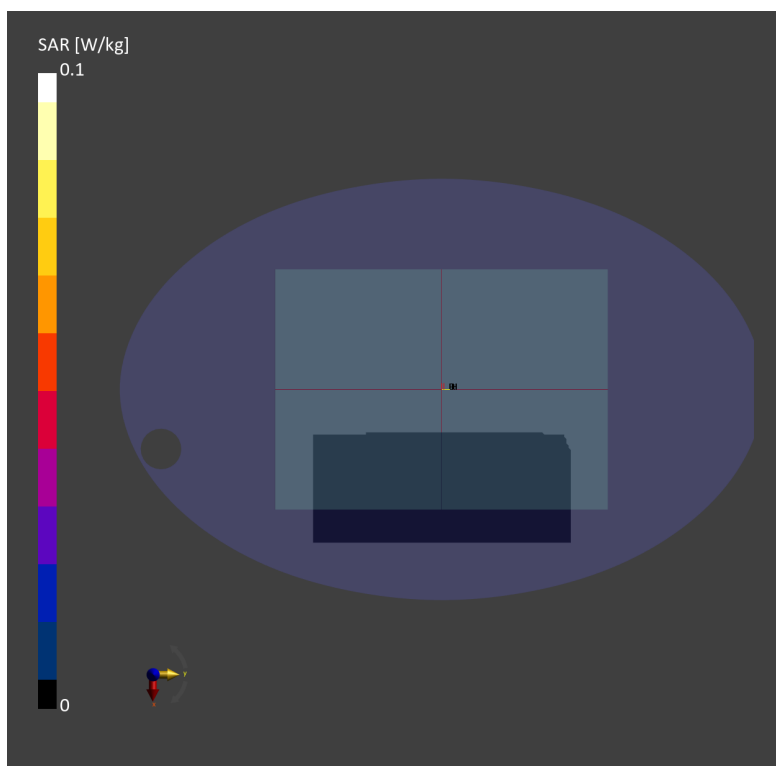

#06_Bluetooth_1Mbps_Bottom of Laptop_0mm_Ch0;Ant 2

Communication System: Bluetooth ; Frequency: 2402 MHz;Duty Cycle: 1:1.305

Medium: HSL_2450_230223 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.768$ S/m; $\epsilon_r = 40.367$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.58, 8.58, 8.58) @ 2402 MHz; Calibrated: 2022/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (61x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0510 W/kg


Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.780 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00411 W/kg

Maximum value of SAR (measured) = 0.0400 W/kg

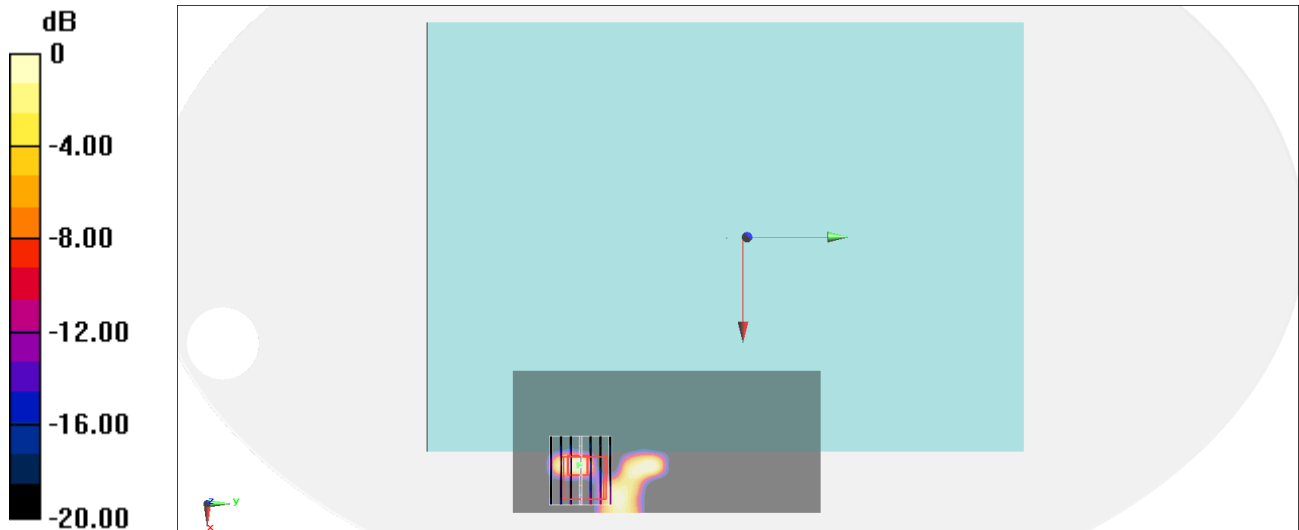

0 dB = 0.0400 W/kg = -13.98 dBW/kg