

Page: 1 of 106

SAR TEST REPORT



Date: Feb. 15, 2022



The following samples were submitted and identified on behalf of the client as:

EUT Type 2TX 11ax (WiFi6E) BW160+BT/BLE Combo Card

Trade Name MediaTek

Model Number MT7922A22M

Company Name Media Tek Inc.

Company Address No. 1, Dusing 1st Rd., Hsinchu Science Park, Hsinchu City,

30078, Taiwan

Standards IEEE/ANSI C95.1-1992, IEEE 1528-2013

FCC ID RAS-MT7922A22M

Date of Receipt Dec. 02, 2021

Date of Test(s) Dec. 17, 2021 ~ Dec. 20, 2021

Date of Issue Feb. 15, 2022

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Ruby Ou	PM / Tom Chiang	Approved By / John Yeh
Ruby Ou	Tom Chiang	John Teh

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 2 of 106

Revision History

Report Number	Revision	Description	Issue Date	Revised By	Remark
ES/2021/C0007	Rev.00	Initial creation of document	Jan. 17, 2022	Ruby Ou	*
ES/2021/C0007	Rev.01	Modify typo	Feb. 08, 2022	Ruby Ou	*
ES/2021/C0007	Rev.02	Modify typo	Feb. 10, 2022	Ruby Ou	*
ES/2021/C0007	Rev.03	Modify typo	Feb. 15, 2022	Ruby Ou	

Note:

The mark " * " is the revised version of the report due to comments submitted by the certification.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 3 of 106

Contents

0. Guidance applied	4
1. General Information	5
1.1 Testing Laboratory	
1.2 Details of Applicant	
1.3 Description of EUT	
1.4 Test Environment	28
1.5 Operation Description	28
1.6 EUT Testing Position	30
1.7 Evaluation Procedures	31
1.8 Probe Calibration Procedures	
1.9 SAR System Description and Setup	36
1.10 System Components	46
1.11 Test Standards and Limits	48
2. Summary of Results	51
2.1 Decision rules	
2.2 Summary of SAR Results	51
2.3 Summary of PD Results	54
2.4 Reporting statements of conformity	54
3. Simultaneous Transmission Analysis	55
3.1 Estimated SAR calculation	
3.2 SPLSR evaluation and analysis	56
4. Instruments List	59
5. Measurements	60
6. SAR System Performance Verification	
7. Uncertainty Budget	
Appendixes	
ES2021C0007 SAR_Appendix A Photographs	
ES2021C0007 SAR_Appendix B DAE & Probe Cal. Certificate	
ES2021C0007 SAR_Appendix C Phantom Description & Dipole Cal. Certificate	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless ounerwise stated une results snown in this test report reter only to the sample(s) tested and such as ample(s) are retained for 90 days only. We #shaft #sh prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 4 of 106

0. Guidance applied

- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- IEC/IEEE 62209-1528:2020
- SPEAG DASY6 System Handbook
- SPEAG DASY6 Application Note

(Interim Procedure for Device Operation at 6GHz-10GHz)

- IEC TR 63170:2018
- IEC 62479:2010
- FCC KDB 865664 D01 v01r04
- FCC KDB 865664 D02 v01r02
- FCC KDB 447498 D01 v06
- FCC KDB 616217 D04 v01r02
- FCC KDB 248227 D01 v02r02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,什報告結果僅與10元。木報告表極大公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 5 of 106

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Central RF Lab								
No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei								
City, Taiwan								
FCC Designation	TW0027							
Number	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1							
Tel	+886-2-2299-3279							
Fax	+886-2-2298-0488							
Internet	http://www.tw.sgs.com/							

1.2 Details of Applicant

Company Name	MediaTek Inc.
IL OMNANY AMMESS	No. 1, Dusing 1st Rd., Hsinchu Science Park, Hsinchu City, 30078, Taiwan

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 6 of 106

1.3 Description of EUT

EUT Type	2TX 11ax (WiFi6	E) BW160+BT/BLE Combo Card					
Trade Name	MediaTek						
Model Number	MT7922A22M						
FCC ID	RAS-MT7922A22	AS-MT7922A22M					
	Product Type: Zenbook						
	Trade Name: ASUS						
Host Information	Model Name: UX3402Z, UX3402ZA, RX3402Z, BX3402Z,						
nost information	Q409Z						
	All models are electrically identical, different model names						
	are for marketing purpose.						
Mode of Operation	⊠WLAN802.11 ⊠Bluetooth						
Duty Cyala	WLAN802.11	Refer to page 23-26					
Duty Cycle	Bluetooth	77.1%					
TX Frequency Range (MHz)	WLAN	2412 ~ 2472, 5180 ~ 5320, 5500 ~ 5720, 5745 ~ 5825, 5925 ~ 6425, 6425 ~ 6525, 6525 ~ 6875, 6875 ~ 7125					
(***: ***)	Bluetooth	2402 ~ 2480					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生红用攝影測建立幾只有書,同時此幾旦萬風宛の干。大報生土極大公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 7 of 106

ZTX

Summary of	Summary of Maximum SAR and Power Density Value										
Mode	Highest SAR1g Body (W/kg)	Highest APD (mW/cm²)	Highest PD (mW/cm²)								
2.4G WLAN	0.95	N/A	N/A								
5.2G WLAN	0.97	N/A	N/A								
5.3G WLAN	1.02	N/A	N/A								
5.6G WLAN	0.92	N/A	N/A								
5.8G WLAN	1.19	N/A	N/A								
6G WLAN	0.27	0.12	0.15								
Bluetooth(GFSK)	0.09	N/A	N/A								

Antenna information:

Vendor		ZTX																
Antenna		Main (PIFA)									Aux(PIFA)							
Part Number	2.00001568(HQ20604751000)						2.00001568(HQ20604751000)											
Frequency(MHz)	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	5925~6425	6425~6525	6525~6875	6875~7125	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	5925~6425	6425~6525	6525~6875	6875~7125
Gain (dBi)	2.89 2.96 2.96 2.61 2.99 2.91 2.57 2.99 2.54					2.54	2.66	2.94	2.94	2.77	2.87	2.80	2.22	2.73	2.85			
		2.00 2.00 2.01 2.01 2.01 2.01 2.00 2.04 2.04 2.01 2.01 2.00 2.22 2.70 2.00																

Vendor		INPAQ																
Antenna		Main (PIFA)							Aux(PIFA)									
Part Number				WA-P-LELE	-04-014(HQ2	20604752000)			WA-P-LELE-04-014(HQ20604752000)								
Frequency(MHz)	2400~2500 5150~5250 5250~5350 5470~5725 5725~5850 5925~6425 6425~6525 6525~6875 6875~71:					6875~7125	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	5925~6425	6425~6525	6525~6875	6875~7125			
Gain (dRi)	2 04	2.35	2.35	2 4 1	2.89	2.87	2.48	2 97	2.51	2.55	2 91	2 91	2.66	2.66	2 77	1 27	2.59	2.59

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時世樣是僅是図の主。大報生主經太公司書面許可,不可與公詢制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 8 of 106

WLAN conducted power table:

		An	t Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1 6	2412 2437		15.50 15.50	15.31 15.40
	802.11b	11	2462	1Mbps	15.50	15.23
	002.116	12	2467	TWIDPS	15.50	15.23
		13	2472	-	15.50	15.19
		1	2412		15.50	15.29
		6	2437	-	15.50	15.26
	802.11g	11	2462	6Mbps	15.50	15.24
		12	2467	† ' '	14.50	14.32
		13	2472		11.50	11.44
		1	2412		15.50	15.35
		6	2437		15.50	15.22
	802.11n20-HT0	11	2462	MCS0	15.50	15.21
		12	2467	1	14.00	13.89
		13	2472	1	9.50	9.43
		1	2412		15.50	15.29
		6	2437		15.50	15.22
	802.11ac20-VHT0	11	2462	MCS0	15.50	15.39
		12	2467		14.00	13.91
2.45GHz		13	2472		9.50	9.41
2.430112		1	2412		15.50	15.29
		6	2437		15.50	15.20
	802.11ax20-HE0	11	2462	MCS0	15.50	15.34
		12	2467		14.00	13.85
		13	2472		10.00	9.81
		3	2422		15.00	14.72
		6	2437		15.50	15.32
	802.11n40-HT0	9	2452	MCS0	15.00	14.71
		10	2457		12.00	11.93
		11	2462		10.00	9.90
		3	2422		15.00	14.72
		6	2437		15.50	15.23
	802.11ac40-VHT0	9	2452	MCS0	15.00	14.71
		10	2457		12.00	11.87
		11	2462		10.00	9.78
		3	2422		15.00	14.90
	000 44- 40 1150	6	2437	MOOO	15.50	15.25
	802.11ax40-HE0	9	2452	MCS0	15.00	14.79
		10	2457		12.50	12.33
		11	2462		10.00	9.87

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 9 of 106

Ant Main											
	1	An	t Main	1	1						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)					
		36	5180		14.00	13.89					
	000 44 -	40	5200	CNAL	14.00	13.88					
	802.11a	44	5220	6Mbps	14.00	13.85					
		48	5240	1	14.00	13.85					
		36	5180		14.00	13.79					
	802.11n20-HT0	40	5200	MCS0	14.00	13.85					
	802.11N20-H10	44	5220		14.00	13.76					
		48	5240		14.00	13.85					
		36	5180		14.00	13.78					
	802.11ac20-VHT0	40	5200	MCS0	14.00	13.71					
		44	5220	MCSU	14.00	13.77					
		48	5240		14.00	13.76					
5.15-5.25 GHz		36	5180		14.00	13.81					
5.15-5.25 GHZ	802.11ax20-HE0	40	5200	MCS0	14.00	13.77					
	002.118X20-DE0	44	5220	IVICSU	14.00	13.85					
		48	5240	1	14.00	13.77					
	802.11n40-HT0	38	5190	MCS0	14.00	13.94					
	002.111140-F10	46	5230	IVICSU	14.00	13.83					
	802.11ac40-VHT0	38	5190	MCS0	14.00	13.72					
	002.11ac40-VH10	46	5230	IVICSU	14.00	13.75					
	802.11ax40-HE0	38	5190	MCS0	14.00	13.72					
	002.11ax 4 0-11E0	46	5230	IVICOU	14.00	13.76					
	802.11ac80-VHT0	42	5210	MCS0	14.00	13.96					
-	802.11ax80-HE0	42	5210	MCS0	14.00	13.87					
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.21					
	802.11ax160-HE0	50	5250	MCS0	13.50	13.40					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有的时,所都些结果做到调转之缘是负责,同时所接见做保留的下,不可能的推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

505 Idiwan Eta.



Page: 10 of 106

		An	t Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		14.00	13.84
	802.11a	56	5280	6Mbps	14.00	13.82
	002.11a	60	5300	Olvibbs	14.00	13.80
		64	5320		14.00	13.83
	802.11n20-HT0	52	5260		14.00	13.87
		56	5280	MCS0	14.00	13.71
		60	5300	IVICSO	14.00	13.82
		64	5320		14.00	13.82
	802.11ac20-VHT0	52	5260		14.00	13.71
		56	5280	MCS0	14.00	13.74
		60	5300		14.00	13.76
5.25-5.35 GHz		64	5320		14.00	13.85
3.23-3.33 GHZ		52	5260		14.00	13.87
	802.11ax20-HE0	56	5280	MCS0	14.00	13.73
	002.11ax20-11L0	60	5300	IVICSO	14.00	13.90
		64	5320		14.00	13.82
	802.11n40-HT0	54	5270	MCS0	14.00	13.92
	002.111140-1110	62	5310	WCSO	14.00	13.86
	802.11ac40-VHT0	54	5270	MCS0	14.00	13.73
	002.11a040-V1110	62	5310	IVICOU	14.00	13.76
	802.11ax40-HE0	54	5270	MCS0	14.00	13.83
	002.11aA+0-11L0	62	5310	IVICOU	14.00	13.84
	802.11ac80-VHT0	58	5290	MCS0	14.00	13.95
	802.11ax80-HE0	58	5290	MCS0	14.00	13.80

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生红用攝影測建立幾只有書,同時此幾旦萬風宛の干。大報生土極大公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 11 of 106

		An	t Main			
		741				
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		14.00	13.88
	000.44	120	5600	0.4	14.00	13.76
	802.11a	140	5700	6Mbps	14.00	13.80
		144	5720	1	14.00	13.83
		100	5500		14.00	13.79
	000 11 00 1170	120	5600		14.00	13.79
	802.11n20-HT0	140	5700	MCS0	14.00	13.80
		144	5720	1	14.00	13.87
		100	5500		14.00	13.71
		120	5600		14.00	13.71
	802.11ac20-VHT0	140	5700	MCS0	14.00	13.73
		144	5720	1	14.00	13.84
		100	5500		14.00	13.80
		120	5600		14.00	13.82
	802.11ax20-HE0	140	5700	MCS0	14.00	13.81
		144	5720	1	14.00	13.82
		102	5510		14.00	13.74
		118	5590	1	14.00	13.75
5.6GHz	802.11n40-HT0	134	5670	MCS0	14.00	13.81
		142	5710	†	14.00	13.92
		102	5510		14.00	13.74
		118	5590	1	14.00	13.73
	802.11ac40-VHT0	134	5670	MCS0	14.00	13.77
		142	5710	1	14.00	13.88
		102	5510		14.00	13.86
		118	5590	1	14.00	13.82
	802.11ax40-HE0	134	5670	MCS0	14.00	13.84
		142	5710	-	14.00	13.79
		106	5530		14.00	13.68
	802.11ac80-VHT0	122	5610	MCS0	14.00	13.67
	552.116555 11110	138	5690		14.00	13.94
		106	5530		14.00	13.88
	802.11ax80-HE0	122	5610	MCS0	14.00	13.77
	552.114,001120	138	5690	IVICSU	14.00	13.88
}	802.11ac160-VHT0	114	5570	MCS0	12.50	12.26
	802.11ax160-HE0	114	5570	MCS0	12.50	12.32
	002.118X100-ME0	114	5570	INICOO	12.50	12.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有的时,所都些结果做到调转之缘是负责,同时所接见做保留的下,不可能的推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 12 of 106

		An	t Main			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		14.00	13.54
	802.11a	157	5785	6Mbps	14.00	13.52
		165	5825		14.00	13.51
		149	5745		14.00	13.52
	802.11n20-HT0	157	5785	MCS0	14.00	13.65
		165	5825		14.00	13.52
		149	5745	MCS0	14.00	13.65
	802.11ac20-VHT0	157	5785		14.00	13.59
		165	5825		14.00	13.67
5.8GHz		149	5745		14.00	13.52
3.0GHZ	802.11ax20-HE0	157	5785	MCS0	14.00	13.57
		165	5825	1	14.00	13.63
	802.11n40-HT0	151	5755	MCS0	14.00	13.76
	002.11Π 4 0-Π10	159	5795	IVICSU	14.00	13.54
	802.11ac40-VHT0	151	5755	MCS0	14.00	13.63
	002.11a040-VA10	159	5795	IVICSU	14.00	13.61
	802.11ax40-HE0	151	5755	MCS0	14.00	13.68
	002.11ax40-FEU	159	5795	IVICSU	14.00	13.52
	802.11ac80-VHT0	155	5775	MCS0	14.00	13.73
	802.11ax80-HE0	155	5775	MCS0	14.00	13.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 13 of 106

		Aı	nt Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		15.50	15.43
		6	2437	1	15.50	15.32
	802.11b	11	2462	1Mbps	15.50	15.27
		12	2467		15.50	15.18
		13	2472		15.50	15.20
		1	2412		15.50	15.23
		6	2437		15.50	15.35
	802.11g	11	2462	6Mbps	15.50	15.34
		12	2467		14.50	14.29
		13	2472		11.50	11.18
		1	2412		15.50	15.22
		6	2437		15.50	15.29
	802.11n20-HT0	11	2462 N	MCS0	15.50	15.22
		12	2467		14.50	14.23
		13	2472		11.50	11.38
		1	2412		15.50	15.28
		6	2437		15.50	15.26
	802.11ac20-VHT0	11	2462	MCS0	15.50	15.23
		12	2467		14.00	13.79
2.45GHz		13	2472		9.50	9.43
2.100112		1	2412		15.50	15.25
		6	2437		15.50	15.26
	802.11ax20-HE0	11	2462	MCS0	15.50	15.29
		12	2467		14.00	13.69
		13	2472		10.00	9.76
		3	2422		15.00	14.81
	000 44 15 11-5	6	2437		15.50	15.25
	802.11n40-HT0	9	2452	MCS0	15.00	14.82
		10	2457	_	12.00	11.84
		11	2462		10.00	9.70
		3	2422	1	15.00	14.88
	000 44 - 40 1/1/170	6	2437	MOOO	15.50	15.38
	802.11ac40-VHT0	9	2452	MCS0	15.00	14.83
		10	2457	4	12.00	11.93
		11	2462		10.00	9.63
		3	2422	1	15.00	14.83
	000 44540 UE0	6	2437	MOSS	15.50	15.32
	802.11ax40-HE0	9	2452	MCS0	15.00	14.87
		10	2457	4	12.50	12.29
		11	2462		10.00	9.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 14 of 106

A 1 A								
		Ar	nt Aux	ı				
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
		36	5180		14.00	13.75		
	802.11a	40	5200	6Mbpc	14.00	13.84		
	002.11a	44	5220	6Mbps	14.00	13.78		
		48	5240		14.00	13.77		
		36	5180		14.00	13.86		
	802.11n20-HT0	40	5200	MCS0	14.00	13.73		
	002.111120 - 1110	44	5220	IVICSU	14.00	13.79		
		48	5240		14.00	13.89		
		36	5180		14.00	13.86		
	802.11ac20-VHT0	40	5200	MCS0	14.00	13.82		
	002.11ac20-VH10	44	5220	IVICSO	14.00	13.83		
		48	5240		14.00	13.81		
5.15-5.25 GHz		36	5180		14.00	13.83		
5.15-5.25 GHZ	802.11ax20-HE0	40	5200	MCS0	14.00	13.81		
	002.11dX20-NE0	44	5220	IVICSU	14.00	13.84		
		48	5240		14.00	13.74		
	802.11n40-HT0	38	5190	MCS0	14.00	13.90		
	002.1111 4 0-Π10	46	5230	IVICSU	14.00	13.68		
	802.11ac40-VHT0	38	5190	MCS0	14.00	13.90		
	002.11a040-V1110	46	5230	IVICSU	14.00	13.84		
	802.11ax40-HE0	38	5190	MCS0	14.00	13.84		
	002.11ax40-nE0	46	5230	IVICSU	14.00	13.83		
	802.11ac80-VHT0	42	5210	MCS0	14.00	13.96		
	802.11ax80-HE0	42	5210	MCS0	14.00	13.85		
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.24		
	802.11ax160-HE0	50	5250	MCS0	13.50	13.36		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 15 of 106

		Ar	nt Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		14.00	13.81
	802.11a	802.11a 56 5280 6Mbps	14.00	13.82		
	002.11a	60	5300	Olvibbs	14.00	13.77
		64	5320		14.00	13.84
		52	5260	260	14.00	13.90
	802.11n20-HT0	56	5280	MCS0	14.00	13.82
		60	5300	IVICOU	14.00	13.88
		64	5320		14.00	13.81
		52	5260	MCS0	14.00	13.73
	802.11ac20-VHT0	56	5280		14.00	13.87
	002.11ac20-V1110	60	5300		14.00	13.81
5.25-5.35 GHz		64	5320		14.00	13.75
3.23-3.33 GHZ		52	5260		14.00	13.82
	802.11ax20-HE0	56	5280	MCS0	14.00	13.89
	002.11ax20-11L0	60	5300	IVICSU	14.00	13.72
		64	5320		14.00	13.70
	802.11n40-HT0	54	5270	MCS0	14.00	13.80
	002.111140-1110	62	5310	WCSO	14.00	13.91
	802.11ac40-VHT0	54	5270	MCS0	14.00	13.70
	002.11a040-V1110	62	5310	IVICOU	14.00	13.87
	802.11ax40-HE0	54	5270	MCS0	14.00	13.83
		62	5310	IVICOU	14.00	13.72
	802.11ac80-VHT0	58	5290	MCS0	14.00	13.92
	802.11ax80-HE0	58	5290	MCS0	14.00	13.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生红用攝影測建立幾只有書,同時此幾旦萬風宛の干。大報生土極大公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 16 of 106

		Ar	nt Aux			
		7 4				
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		14.00	13.87
	000.44	120	5600	0.4	14.00	13.79
	802.11a	140	5700	6Mbps	14.00	13.84
		144	5720	1	14.00	13.81
		100	5500		14.00	13.72
	000 44 00 1170	120	5600		14.00	13.82
	802.11n20-HT0	140	5700	MCS0	14.00	13.87
		144	5720	1	14.00	13.74
		100	5500		14.00	13.86
		120	5600		14.00	13.88
	802.11ac20-VHT0	140	5700	MCS0	14.00	13.86
		144	5720	1	14.00	13.80
		100	5500		14.00	13.82
		120	5600	†	14.00	13.81
	802.11ax20-HE0	140	5700	MCS0	14.00	13.82
		144	5720	1	14.00	13.76
		102	5510		14.00	13.78
		118	5590	1	14.00	13.87
5.6GHz	802.11n40-HT0	134	5670	MCS0	14.00	13.88
		142	5710	†	14.00	13.91
		102	5510		14.00	13.84
		118	5590	1	14.00	13.77
	802.11ac40-VHT0	134	5670	MCS0	14.00	13.86
		142	5710	•	14.00	13.70
		102	5510		14.00	13.77
		118	5590	1	14.00	13.75
	802.11ax40-HE0	134	5670	MCS0	14.00	13.81
		142	5710	-	14.00	13.81
		106	5530		14.00	13.64
	802.11ac80-VHT0	122	5610	MCS0	14.00	13.54
	002.11800-7010	138	5690		14.00	13.78
		106	5530		14.00	13.81
	802.11ax80-HE0	122	5610	MCS0	14.00	13.81
	502.110A0011E0	138	5690	WIGGO	14.00	13.83
-	802.11ac160-VHT0	114	5570	MCS0	12.50	12.32
	802.11ax160-HE0	114	5570	MCS0	12.50	12.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有的时,所都些结果做到调转之缘是负责,同时所接见做保留的下,不可能的推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 17 of 106

		Ar	nt Aux			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		14.00	13.59
	802.11a	157	5785	6Mbps	14.00	13.57
		165	5825		14.00	13.55
		149	5745		14.00	13.53
	802.11n20-HT0	157	5785	MCS0	14.00	13.56
		165	5825		14.00	13.62
		149	5745	MCS0	14.00	13.62
	802.11ac20-VHT0	157	5785		14.00	13.61
		165	5825		14.00	13.70
5.8GHz		149	5745		14.00	13.60
3.0GHZ	802.11ax20-HE0	157	5785	MCS0	14.00	13.53
		165	5825	1	14.00	13.63
	802.11n40-HT0	151	5755	MCS0	14.00	13.66
	002.111140-Π10	159	5795	IVICSU	14.00	13.85
	802.11ac40-VHT0	151	5755	MCS0	14.00	13.62
	002.11a040-VH10	159	5795	IVICSU	14.00	13.60
	802.11ax40-HE0	151	5755	MCS0	14.00	13.63
	002.11ax40-MEU	159	5795	IVICSU	14.00	13.59
	802.11ac80-VHT0	155	5775	MCS0	14.00	13.71
	802.11ax80-HE0	155	5775	MCS0	14.00	13.59

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 18 of 106

WIFI 6E power:

			Ant Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	5955		1.00	0.95
	802.11a	45	6175	6Mbps	1.00	0.92
		93	6415		1.00	0.92
	802.11ax20-HE0	1	5955	MCS0	1.00	0.90
		45	6175		1.00	0.94
		93	6415		1.00	0.86
U-NII-5		3	5985		3.50	3.41
6.2GHz	802.11ax40-HE0	43	6165	MCS0	3.50	3.43
0.20112		91	6405		3.50	3.41
		7	5985		7.00	6.93
	802.11ax80-HE0	39	6145	MCS0	7.00	6.90
		87	6385		7.00	6.91
		15	6025	MCS0	9.00	8.92
	802.11ax160-HE0	47	6185		9.00	8.87
		79	6345		9.50	9.49

	Ant Main									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)				
		97	6435		1.50	1.44				
	802.11a	105	6475	6Mbps	1.50	1.47				
		113	6515		1.50	1.41				
		97	6435		1.50	1.42				
U-NII-6	802.11ax20-HE0	105	6475	MCS0	1.50	1.37				
6.5GHz		113	6515		1.50	1.41				
0.5GHZ	802.11ax40-HE0	99	6445	MCS0	4.00	3.92				
	002.11ax40-⊓E0	107	6485	IVICSU	4.00	3.91				
	802.11ax80-HE0	103	6465	MCS0	7.00	6.92				
	OUZ. I IAXOU-MEU	119	6545		7.00	6.88				
	802.11ax160-HE0	111	6505	MCS0	9.50	9.48				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 19 of 106

	Ant Main								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
		117	6535		1.00	0.91			
	802.11a	149	6695	6Mbps	1.00	0.95			
		181	6855		1.00	0.94			
	802.11ax20-HE0	117	6535	MCS0	1.50	1.40			
		149	6695		1.50	1.39			
		181	6855		1.50	1.42			
U-NII-7		115	6525		4.00	3.91			
6.7GHz	802.11ax40-HE0	147	6685	MCS0	4.00	3.95			
		179	6845		4.00	3.93			
		135	6625		7.00	6.93			
	802.11ax80-HE0	151	6705	MCS0	7.00	6.92			
		167	6785		7.00	6.91			
	802.11ax160-HE0	143	6665	MCS0	9.00	8.93			
	002.11ax100-11E0	175	6825	IVICOU	9.00	8.77			

Ant Main									
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
		185	6875		1.50	1.48			
	802.11a	209	6995	6Mbps	1.50	1.43			
		233	7115		1.50	1.46			
	802.11ax20-HE0	185	6875	MCS0	2.00	1.92			
		209	6995		2.00	1.88			
U-NII-8		233	7115		2.00	1.89			
7.0GHz	802.11ax40-HE0	187	6885	MCS0	4.50	4.42			
	002.11ax40-11L0	227	7085	IVICOU	4.50	4.40			
		183	6865		7.00	6.92			
	802.11ax80-HE0	199	6945	MCS0	7.50	7.38			
		215	7025		7.50	7.43			
	802.11ax160-HE0	207	6985	MCS0	9.50	9.24			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 20 of 106

			Ant Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	5955		1.00	0.93
	802.11a	45	6175	6Mbps	1.00	0.95
		93	6415		1.00	0.97
	802.11ax20-HE0	1	5955	MCS0	1.00	0.91
		45	6175		1.00	0.92
		93	6415		1.00	0.94
U-NII-5		3	5985		3.50	3.44
6.2GHz	802.11ax40-HE0	43	6165	MCS0	3.50	3.39
0.20112		91	6405		3.50	3.37
		7	5985		7.00	6.85
	802.11ax80-HE0	39	6145	MCS0	7.00	6.89
		87	6385		7.00	6.89
		15	6025	MCS0	9.00	8.99
	802.11ax160-HE0	47	6185		9.00	8.90
		79	6345		9.50	9.43

Ant Aux								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
U-NII-6 6.5GHz		97	6435		1.50	1.40		
	802.11a	105	6475	6Mbps	1.50	1.41		
		113	6515		1.50	1.45		
	802.11ax20-HE0	97	6435		1.50	1.38		
		105	6475	MCS0	1.50	1.38		
		113	6515		1.50	1.41		
	802.11ax40-HE0	99	6445	MCS0	4.00	3.88		
	002.11dX40-FE0	107	6485	IVICSU	4.00	3.86		
	802.11ax80-HE0	103	6465	MCS0	7.00	6.94		
	002.11ax00-HE0	119	6545	IVICSU	7.00	6.94		
	802.11ax160-HE0	111	6505	MCS0	9.50	9.41		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有的时,所都些结果做到调转之缘是负责,同时所接见做保留的下,不可能的推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 21 of 106

Ant Aux								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
		117	6535		1.00	0.95		
	802.11a	149	6695	6Mbps	1.00	0.99		
		181	6855		1.00	0.98		
	802.11ax20-HE0	117	6535	MCS0	1.50	1.45		
		149	6695		1.50	1.38		
		181	6855		1.50	1.36		
U-NII-7	802.11ax40-HE0	115	6525		4.00	3.93		
6.7GHz		147	6685	MCS0	4.00	3.91		
		179	6845		4.00	3.91		
	802.11ax80-HE0	135	6625		7.00	6.90		
		151	6705	MCS0	7.00	6.93		
		167	6785		7.00	6.88		
	802.11ax160-HE0	143	6665	MCS0	9.00	8.90		
	002.11ax100-17E0	175	6825	IVICOU	9.00	8.78		

Ant Aux								
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
		185	6875		1.00	0.99		
	802.11a	209	6995	6Mbps	2.00	1.97		
		233	7115		2.00	1.93		
	802.11ax20-HE0	185	6875	MCS0	2.00	1.90		
		209	6995		2.00	1.89		
U-NII-8 7.0GHz		233	7115		2.00	1.94		
	802.11ax40-HE0	187	6885	MCS0	4.50	4.38		
	002.11ax40-11L0	227	7085	IVICSU	4.50	4.42		
		183	6865		7.00	6.86		
	802.11ax80-HE0	199	6945	MCS0	7.50	7.43		
		215	7025		7.50	7.37		
	802.11ax160-HE0	207	6985	MCS0	9.50	9.39		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是结果都是这样的人,因为他们是这个人可能的。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 22 of 106

Bluetooth conducted power table:

Diacto	Biactootii ooliaaotea poiitei tabie.								
		_	1Mbps		2Mbps		3Mbps		
Mode Channe		Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	
	CH 00	2402		11.48		8.07		7.92	
BR/EDR	CH 39	2441	11.50	11.33	8.50	7.88	8.50	7.80	
	CH 78	2480		11.45		7.85		7.77	

Mode	Channel	Frequency (MHz)	GFSK			
Wode			Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)		
	CH 00	2402		11.31		
Bluetooth 4.0_1M	CH 19	2440	11.5	11.24		
	CH 39	2480		11.15		

Mode	Channel	Frequency (MHz)	GFSK			
Wode			Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)		
	CH 00	2402		11.45		
Bluetooth 4.0_2M	CH 19	2440	11.5	11.40		
	CH 39	2480		11.34		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 23 of 106

2.4G b duty

(8.385/8.79=0.953) Scaling Factor=1.049

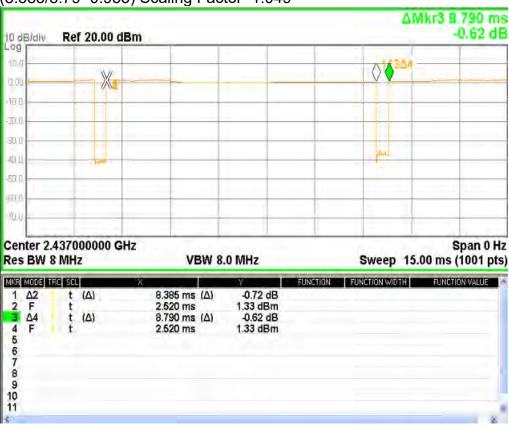

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. N



Page: 24 of 106

5G n(40M) duty (648.6/693.1=0.936) Scaling Factor=1.068

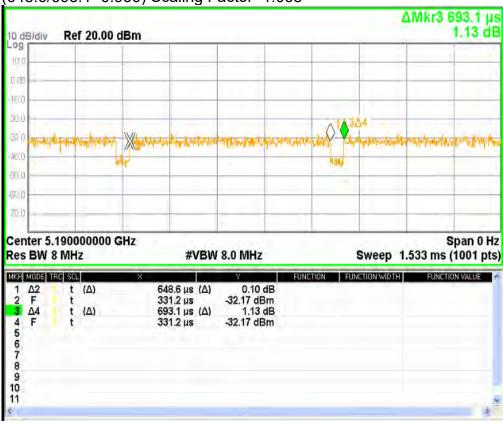

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想生红用做影响起力操具负责,同时此模具做足列的手。木型生工概念人同事面实可,不可可以推测。


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 25 of 106

5G ac(80M) duty (188.5/232.5=0.811) Scaling Factor=1.233

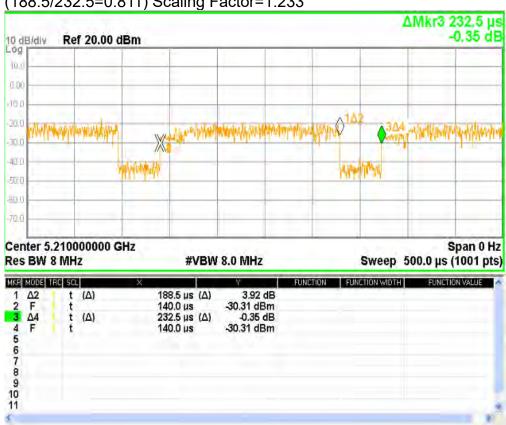

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 26 of 106

6E ax(160M) duty (296.9/340=0.873) Scaling Factor=1.145



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 27 of 106

BT duty

(2.888/3.744=0.771) Scaling Factor=1.297



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 28 of 106

1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

- 1. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.
- 2. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 3. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.
- 4. Per 201904 TCBC workshops, general principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing.
- 5. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
- 6. According to KDB865664 D01, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit)
- 7. WIFI 6E of the device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
- 8. Per October 2020 & April 2021 TCB Workshop Interim procedures and FCC guidance, start instead with a minimum of 5 test channels across the full band, then adapt and apply conducted power and SAR test reduction procedures of KDB Pub. 248227 v02r02.
- 9. WIFI 6E SAR is measured by using 6-7GHz parameters per IEC/IEEE62209-1528:2020 and report also estimated absorbed PD (for reference purposes only, not specifically for compliance).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations up and the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 29 of 106

- 10. For the highest SAR test configurations also measure incident PD (total) using mmW near-field probe and total-field/power-density reconstruction method.
- 11. The PD test was performed with a 2 mm separation between probe sensor and EUT bottom surface.
- 12. According to October 2020 TCB Workshop Interim procedures, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.67 dB (85%) was used to determine the psPD measurement scaling factor.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 30 of 106

1.6 EUT Testing Position

For laptop PC, according to KDB 616217 D04, SAR evaluation is required for the bottom surface of the keyboard. This EUT was tested in the base of EUT directly against the flat phantom. The required minimum test separation distance for incorporating transmitters and antennas into laptop computer display is determined with the display screen opened at an angle of 90° to the keyboard compartment.

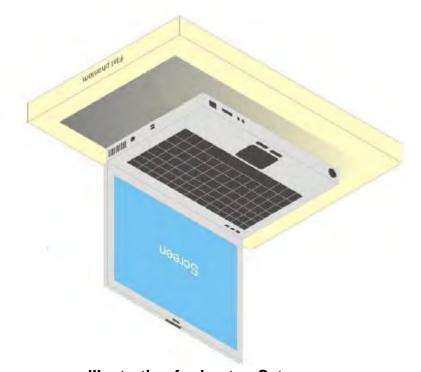


Illustration for Laptop Setup

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华红用摄影测过之样只有含,同时叶梯只展展现的元子。大数华土模太从司隶而连订,不可如以推制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. _I No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 31 of 106

1.7 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- 3. The generation of a high-resolution mesh within the measured volume.
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid.
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within –2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans.

The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此觀些廷里僅對理試之樣是負責,同時此樣是僅保留的子。太觀些去經太公司事而許可,不可類於複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 32 of 106

cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found.

If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報先结里僅對剛建之樣是各書,同時件樣是僅是200千。木報先去經太公司事而許可,不可執份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 33 of 106

1.8 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.8.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient (δ τ / δt) in the liquid.

$$SAR = C \frac{\delta T}{\delta t}$$
,

Whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

• The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOS Idiwali Eta.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 34 of 106

itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.

- The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about ±10% (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is ±5% (RSS) when the same liquid is used for the calibration and for actual measurements and ±7-9% (RSS) when not, which is in good agreement with the estimates given in [2].

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 35 of 106

1.8.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- (1) N. Kuster, Q. Balzano, and J.C. Lin, Eds., *Mobile Communications Safety*, Chapman & Hall, London, 1997.
- (2) K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- (3) K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sqs.com.tw



Page: 36 of 106

1.9 SAR System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

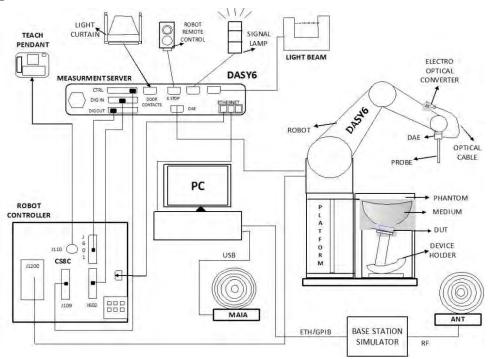


Fig. a A block diagram of the SAR measurement system

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生结用攝影測建立幾只有著,同時世輕具攝風如何主。大報生主概太八司書面對可,不可如以複制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 37 of 106

detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Windows 10 and the DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報先结里僅對剛建之樣是各書,同時件樣是僅是200千。未報先夫經太公司事而許可,不可架份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 38 of 106

1.9.1 Power density measurement system

DASY6 system

Power density measurements for mmWave frequencies were performed using SPEAG DASY6 with cDASY6 5G module. The DASY6 included a high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the 5G phantom cover.

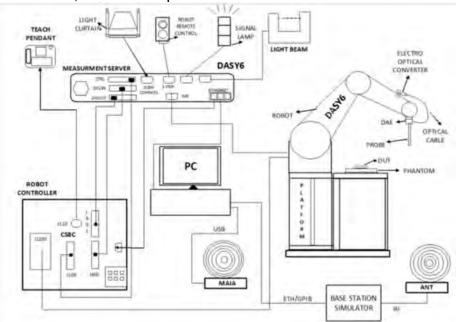


Fig-2.1 SPEAG DASY6 system

EUmmWVx probe

The EUmmWVx probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. The design entails two small 0.8mm dipole sensors mechanically protected by high-density foam, printed on both sides of a 0.9mm wide and 0.12mm thick glass substrate. The body of the probe is specifically constructed to minimize distortion by the scattered fields. The probe consist of two sensors with different angles (1 and 2) arranged in the same plane in the probe axis. Three or more measurements of the two sensors are taken for different probe rotational angles to derive the amplitude and polarization information. The probe design allows measurements at distances as small as 2mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm. The exact distance is calibrated.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 39 of 106

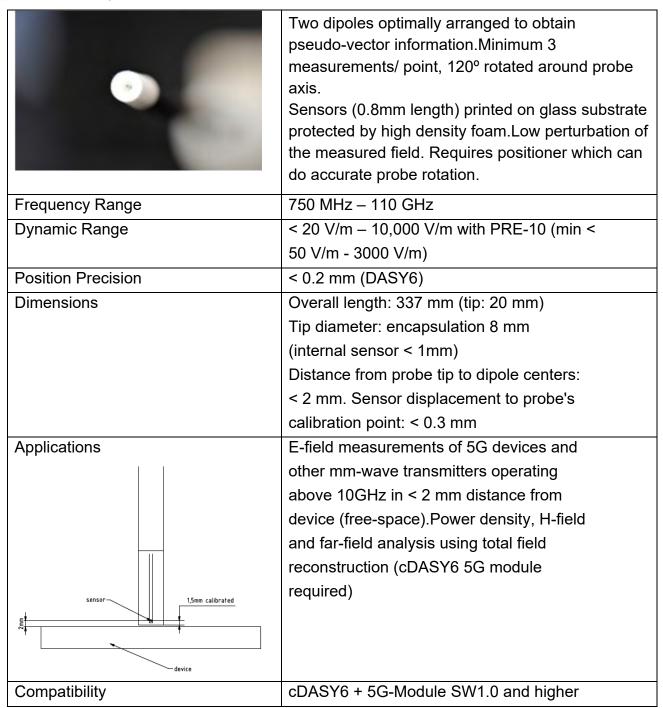

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 40 of 106

1.9.2 SAR System Performance Check Results

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% (according to KDB865664D01) from the target SAR values.

These tests were done at 2450/5200/5300/5600/5800/6500/7000/10000 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. During the tests, the liquid depth above the ear reference points was above 15 cm (≤3G) or 10 cm (>3G) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

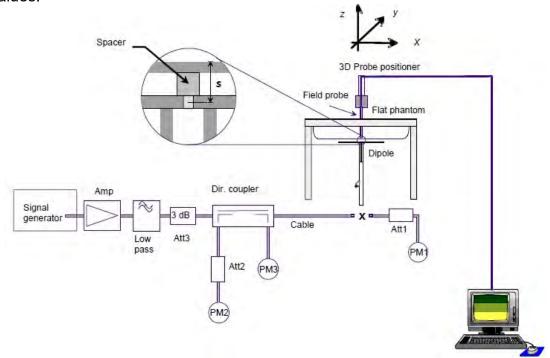


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 41 of 106

Validation Kit	S/N	Frequ (M	uency Hz)	1W Target SAR-1g (mW/g)	pin=250mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D2450V2	50V2 727 2450 Head		53.9	13.40	53.6	-0.56%	Dec. 17, 2021	

Validation Kit	S/N Frequency (MHz)		1W Target SAR-1g (mW/g)	Pin=100mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date	
	1023	5200	Head	77.9	7.89	78.9	1.28%	Dec. 17, 2021
D5GHzV2		5300	Head	80.4	7.88	78.8	-1.99%	Dec. 17, 2021
D3G12V2		5600	Head	83.9	8.21	82.1	-2.15%	Dec. 18, 2021
		5800	Head	80.9	8.19	81.9	1.24%	Dec. 18, 2021
D6.5GHzV2	D6.5GHzV2 1006		Head	291	29.50	295	1.37%	Dec. 19, 2021
D7GHzV2	1007	7000	Head	275	27.10	271	-1.45%	Dec. 19, 2021

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sgs.com.tw




Page: 42 of 106

Power Density Test System Verification

The system was verified to be within ±0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

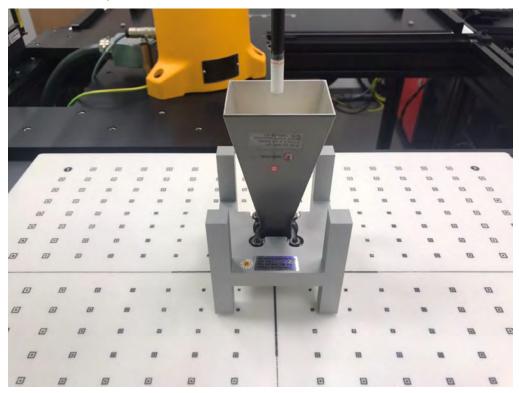

System Verification Setup Photo

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 43 of 106

PD System Verification Results

The system was verified to be within ±0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

Frequency (GHz)	PD Verification Source	Probe S/N	DAE S/N	Distance (mm)	Prad (mW)	Measured 4cm^2 (W/m^2)	Target 4cm^2 (W/m^2)	Deviation (dB)	Date
10G	10G	9399	877	10	74	41.5	42.3	-0.08	Dec. 20, 2021

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 44 of 106

1.9.3 SAR Tissue Verification

The dielectric properties for this Head-simulant fluid were measured by using the SPEAG Dielectric Assessment Kit (DAKS-3.5)

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within ± 5% of the target values.

The depth of the tissue simulant in the flat section of the phantom was \geq 15 cm \pm 5 mm (Frequency <3G) or >10 cm +5 mm (Frequency >3G) during all tests (Fig. 2)

[nm (⊦req	uency s		2 10 CH		n (Frequ	ency -	<u>'3G) u</u>	uring ai	ilesis. (rig. 2)
Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, Er	Measured Conductivity, σ (S/m)	% dev εr	% dev σ	Ambient temprature	liquid tempature	Use Equipment
		2402	39.285	1.757	39.056	1.741	-0.58%	-0.93%			
		2412	39.244	1.760	39.009	1.743	-0.60%	-0.99%			
		2437	39.217	1.792	39.001	1.774	-0.55%	-1.02%	22.3	22.8	
		2450	39.200	1.800	38.973	1.782	-0.58%	-1.00%			
		2462	39.185	1.813	38.921	1.796	-0.67%	-0.94%			
	Dec, 17. 2021	5190	35.997	4.645	35.645	4.603	-0.98%	-0.90%			
		5200	36.000	4.660	35.608	4.614	-1.09%	-0.99%	22.4	22.6	
		5210	35.990	4.670	35.578	4.621	-1.14%	-1.05%			
		5270	35.930	4.730	35.556	4.683	-1.04%	-0.99%			
		5290	35.910	4.750	35.522	4.703	-1.08%	-0.99%	22.4	22.7	
		5300	35.900	4.760	35.494	4.713	-1.13%	-0.99%			SAR 3
Head		5600	35.500	5.070	35.120	5.019	-1.07%	-1.01%	22.3	22.6	DAE : 877 Probe : 7686
пеаи		5690	35.380	5.163	34.984	5.110	-1.12%	-1.03%	22.5	22.0	
	Dec, 18. 2021	5755	35.345	5.202	34.954	5.145	-1.11%	-1.09%			
	Dec, 18. 2021	5775	35.325	5.219	34.936	5.169	-1.10%	-0.95%	22.3	22.5	
		5795	35.305	5.236	34.922	5.175	-1.08%	-1.16%	22.3	22.3	
		5800	35.300	5.270	34.915	5.186	-1.09%	-1.59%			
		6025	35.043	5.507	34.654	5.450	-1.11%	-1.03%			
		6345	34.686	5.887	34.311	5.831	-1.08%	-0.95%			
		6500	34.500	6.070	34.121	6.006	-1.10%	-1.05%			
	Dec, 19. 2021	6505	34.494	6.076	34.115	6.016	-1.10%	-0.98%	22.5	22.6	
		6665	34.302	6.261	33.921	6.201	-1.11%	-0.96%			
		6985	33.918	6.633	33.562	6.565	-1.05%	-1.02%			
		7000	33.900	6.650	33.541	6.585	-1.06%	-0.98%			

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 45 of 106

The composition of the tissue simulating liquid:

						J						
1			+									
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount				
2450M	Head	550ml	450ml	_	_	_	_	1.0L(Kg)				

Body Simulating Liquids for 5 GHz, Manufactured by SPEAG:

 <i></i>		· · · · · · · · · · · · · · · · · · ·	,
Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報先结里僅對剛建之樣是各書,同時件樣是僅是200千。未報先夫經太公司事而許可,不可架份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 46 of 106

1.10 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic
	solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air
	Conversion Factors (CF) for HSL
	2450/5200/5300/5600/5800/6500/7000/10000
	MHz Additional CF for other liquids and
	frequencies upon request
Frequency	10 MHz to > 6 GHz, Linearity: ± 0.6 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis)
	± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic	10 μW/g to > 100 mW/g
Range	Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
Dimensions	Tip diameter: 2.5 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g.,
	very strong gradient fields). Only probe which enables compliance
	testing for frequencies up to 6 GHz with precision of better 30%.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 47 of 106

PHANTOM

Model	ELI
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MH to 6 GHz. ELI is fully compatible with the IEC 62209-standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom position and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
Shell	2 ± 0.2 mm
Thickness	
Filling Volume	Approx. 30 liters
Dimensions	Major axis: 600 mm Minor axis: 400 mm

DEVICE HOLDER

DEVICE HOLL		
Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin), which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	量
		Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 48 of 106

1.11 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter.

Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

1. Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over a 10 grams of tissue (defined as a tissue volume in the shape of a cube).

Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

2. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 49 of 106

Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube).

General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure.

Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .6)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational		
Spatial Peak SAR (Brain)	1.60 W/kg	8.00 W/kg		
Spatial Average SAR (Whole Body)	0.08 W/kg	0.40 W/kg		
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg		

RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in the following Table shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm2 per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	2	Averaging time (minutes)
	(A) Limits for Oc	cupational/Controlled Expos	sures	
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/	4.89/1	*(900/f2)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
	(B) Limits for Gene	ral Population/Uncontrolled I	Exposure	
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/	2 19/1	*(180/f2)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	-30
1500-100,000			1.0	30

Table. RF exposure limits

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 50 of 106

Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 51 of 106

2. Summary of Results

2.1 Decision rules

Reported measurement data comply with IEEE 1528-2013:

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.2 Summary of SAR Results

Ant Main

Mode	Position	Distance	CH	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	Plot page
wode	Position	(mm)	OH	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	
	Bottom Surface	0	1	2412	15.50	15.31	1.049	104.47%	0.818	0.896	-
WLAN 802.11b	Bottom Surface	0	6	2437	15.50	15.40	1.049	102.33%	0.862	0.925	60
INPAQ Spotcheck	Bottom Surface Bottom Surface	0	11 11	2462 2462	15.50 15.50	15.23 15.23	1.049 1.049	106.41% 106.41%	0.853 0.845	0.952 0.943	
	Bottom Surface	U		2402	15.50	15.23	1.049	100.41%	0.045	0.943	
WLAN 802.11n (40M) 5.2G	Bottom Surface	0	38	5190	14.00	13.94	1.068	101.39%	0.566	0.613	61
WLAN 802.11ac (80M) 5.2G	Bottom Surface	0	42	5210	14.00	13.96	1.233	100.93%	0.776	0.966	62
INPAQ Spotcheck	Bottom Surface	0	42	5210	14.00	13.96	1.233	100.93%	0.754	0.938	-
WLAN 802.11n (40M) 5.3G	Bottom Surface	0	54	5270	14.00	13.92	1.068	101.86%	0.683	0.743	63
WLAN 802.11ac (80M) 5.3G	Bottom Surface	0	58	5290	14.00	13.95	1.233	101.16%	0.821	1.024	64
INPAQ Spotcheck	Bottom Surface	0	58	5290	14.00	13.95	1.233	101.16%	0.805	1.004	-
WLAN 802.11ac (80M)	Bottom Surface	0	106	5530	14.00	13.68	1.233	107.65%	0.659	0.875	-
5.6G	Bottom Surface	0	138	5690	14.00	13.94	1.233	101.39%	0.732	0.915	65
NPAQ Spotcheck	Bottom Surface	0	138	5690	14.00	13.94	1.233	101.39%	0.711	0.889	-
WLAN 802.11n	Bottom Surface	0	151	5755	14.00	13.76	1.068	105.68%	1.010	1.140	66
(40M) 5.8G	Bottom Surface	0	159	5795	14.00	13.54	1.068	111.17%	0.944	1.121	-
NPAQ Spotcheck	Bottom Surface	0	151	5755	14.00	13.76	1.068	105.68%	0.948	1.070	-
WLAN 802.11ac (80M) 5.8G	Bottom Surface	0	155	5775	14.00	13.73	1.233	106.41%	0.903	1.185	67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 52 of 106

Ant Aux

Mode	Position	Distance	CH	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	Plot page
Mode	Position	(mm)	СН	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	Plot page
WLAN 802.11b	Bottom Surface	0	1	2412	15.50	15.43	1.049	101.62%	0.746	0.795	68
NPAQ Spotcheck	Bottom Surface	0	1	2412	15.50	15.43	1.049	101.62%	0.738	0.787	-
Bluetooth	Bottom Surface	0	0	2402	11.50	11.48	1.297	100.46%	0.065	0.085	69
(GFSK)	Bottom Surface	0	39	2441	11.50	11.33	1.297	103.99%	0.059	0.080	-
(GFSK)	Bottom Surface	0	78	2480	11.50	11.45	1.297	101.16%	0.055	0.072	-
NPAQ Spotcheck	Bottom Surface	0	0	2402	11.50	11.48	1.297	100.46%	0.060	0.078	
WLAN 802.11ac (80M) 5.2G	Bottom Surface	0	42	5210	14.00	13.96	1.233	100.93%	0.224	0.279	70
NPAQ Spotcheck	Bottom Surface	0	42	5210	14.00	13.96	1.233	100.93%	0.218	0.271	-
WLAN 802.11ac (80M) 5.3G	Bottom Surface	0	58	5290	14.00	13.92	1.233	101.86%	0.216	0.271	71
NPAQ Spotcheck	Bottom Surface	0	58	5290	14.00	13.92	1.233	101.86%	0.201	0.252	-
WLAN 802.11ac (80M) 5.6G	Bottom Surface	0	138	5690	14.00	13.78	1.233	105.20%	0.139	0.180	72
NPAQ Spotcheck	Bottom Surface	0	138	5690	14.00	13.78	1.233	105.20%	0.133	0.173	-
WLAN 802.11ac (80M) 5.8G	Bottom Surface	0	155	5775	14.00	13.71	1.233	106.91%	0.414	0.546	73
NPAQ Spotcheck	Bottom Surface	0	155	5775	14.00	13.71	1.233	106.91%	0.398	0.525	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時世樣是僅是図の主。大報生主經太公司書面許可,不可與公詢制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 53 of 106

WIFI 6E

Ant Main

Mode	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	Estimated APD	Plot page
Mode	Position	(mm)	CH	(MHz)	Tolerance (dBm)	Avg. Power (dBm)	scaling	scaling	Measured	Reported	mW/cm^2 (4cm^2)	Plot page
U-NII-5 6.2GHz	Bottom Surface	0	15	6025	9.00	8.92	1.145	101.86%	0.123	0.143	0.067	74
802.11ax (160M)	Bottom Surface	0	79	6345	9.50	9.49	1.145	100.23%	0.053	0.061	0.025	75
U-NII-6 6.5GHz 802.11ax (160M)	Bottom Surface	0	111	6505	9.50	9.48	1.145	100.46%	0.113	0.130	0.061	76
U-NII-7 6.7GHz 802.11ax (160M)	Bottom Surface	0	143	6665	9.00	8.93	1.145	101.62%	0.085	0.099	0.042	77
U-NII-8 7.0GHz 802.11ax (160M)	Bottom Surface	0	207	6985	9.50	9.24	1.145	106.17%	0.036	0.044	0.022	78
INPAQ Spotcheck	Bottom Surface	0	15	6025	9.00	8.92	1.145	101.86%	0.119	0.139	0.067	-

Ant Aux

, , .,												
Mode	Position	Distance	CH	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	Estimated APD	Plot page
	rosition	(mm)	GII	(MHz)	Tolerance (dBm)		scaling	scaling	Measured	Reported	mW/cm*2 (4cm*2)	
U-NII-5 6.2GHz	Bottom Surface	0	15	6025	9.00	8.99	1.145	100.23%	0.043	0.049	0.022	79
802.11ax (160M)	Bottom Surface	0	79	6345	9.50	9.43	1.145	101.62%	0.040	0.047	0.018	80
U-NII-6 6.5GHz 802.11ax (160M)	Bottom Surface	0	111	6505	9.50	9.41	1.145	102.09%	0.057	0.067	0.027	81
U-NII-7 6.7GHz 802.11ax (160M)	Bottom Surface	0	143	6665	9.00	8.90	1.145	102.33%	0.051	0.060	0.024	82
U-NII-8 7.0GHz 802.11ax (160M)	Bottom Surface	0	207	6985	9.50	9.39	1.145	102.57%	0.232	0.272	0.118	83
INPAQ Spotcheck	Bottom Surface	0	207	6985	9.50	9.39	1.145	102.57%	0.210	0.247	0.118	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 54 of 106

2.3 Summary of PD Results

Ant Main

		Distance		Freq.	Max. Rated Avg.	Measured	Tune-up	Duty cycle	Measurement		PD resi	ult(4cm)		Plot
Mode	Position	(mm)	СН	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling	scaling	uncertainty	Measured Total psPD (mW/cm^2)	Reported Total psPD (mW/cm^2)	Measured Normal psPD (mW/cm^2)	Reported Normal psPD (mW/cm^2)	page
WLAN 6E 802.11ax(160M) U-NII-5	Bottom Surface	2	15	6025	9.00	8.92	101.86%	1.145	1.55	0.031	0.056	0.025	0.045	84
WLAN 6E 802.11ax(160M) U-NII-5	Bottom Surface	2	79	6345	9.50	9.49	100.23%	1.145	1.55	0.038	0.068	0.033	0.059	85
WLAN 6E 802.11ax(160M) U-NII-6	Bottom Surface	2	111	6505	9.50	9.48	100.46%	1.145	1.55	0.025	0.045	0.022	0.039	86
WLAN 6E 802.11ax(160M) U-NII-7	Bottom Surface	2	143	6825	9.00	8.93	101.62%	1.145	1.55	0.028	0.051	0.020	0.036	87
WLAN 6E 802.11ax(160M) U-NII-8	Bottom Surface	2	207	6985	9.50	9.24	106.17%	1.145	1.55	0.012	0.023	0.011	0.021	88
INPAQ Spotcheck	Bottom Surface	2	79	6345	9.50	9.49	100.23%	1.145	1.55	0.032	0.057	0.029	0.052	-

Ant Aux

		Distance		Freq.	Max. Rated Avg.	Measured	Tune-up	Duty cycle	Measurement		PD resi	ult(4cm)		
Mode	Position	(mm)	CH	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling	scaling	uncertainty	Measured Total psPD (mW/cm^2)	Reported Total psPD (mW/cm^2)	Measured Normal psPD (mW/cm^2)	Reported Normal psPD (mW/cm^2)	
WLAN 6E 802.11ax(160M) U-NII-5	Bottom Surface	2	15	6025	9.00	8.99	100.23%	1.145	1.55	0.033	0.059	0.029	0.052	89
WLAN 6E 802.11ax(160M) U-NII-5	Bottom Surface	2	79	6345	9.50	9.43	101.62%	1.145	1.55	0.026	0.047	0.024	0.043	90
WLAN 6E 802.11ax(160M) U-NII-6	Bottom Surface	2	111	6505	9.50	9.41	102.09%	1.145	1.55	0.028	0.051	0.025	0.045	91
WLAN 6E 802.11ax(160M) U-NII-7	Bottom Surface	2	143	6665	9.00	8.90	102.33%	1.145	1.55	0.032	0.058	0.031	0.056	92
WLAN 6E 802.11ax(160M) U-NII-8	Bottom Surface	2	207	6985	9.50	9.39	102.57%	1.145	1.55	0.081	0.147	0.066	0.120	93
INPAQ Spotcheck	Bottom Surface	2	207	6985	9.50	9.39	102.57%	1.145	1.55	0.077	0.140	0.061	0.111	-

Note:

Scaling = $\frac{\text{reported SAR}}{\text{measured SAR}} = \frac{P2(mW)}{P1(mW)} = 10^{\left(\frac{P2-P1}{10}\right)(dBm)}$

Reported SAR = measured SAR * (scaling)

Where P2 is maximum specified power, P1 is measured conducted power

2.4 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279



Page: 55 of 106

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
WLAN 2.4GHz Main + WLAN 2.4GHz Aux	Yes
WLAN 2.4GHz Main + BT Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux	Yes
WLAN 6E Main + WLAN 6E Aux	Yes
WLAN 6E Main + WLAN 6E Aux + BT Aux	Yes

Note:

- 1. Bluetooth and WLAN Aux share the same antenna path, and BT can transmit with WLAN Main simultaneously.
- 2. For 2.4/5/6GHz WLAN Main and Aux antennas, the maximum output power of each antenna during simultaneous transmission is the same with (or less than) that used in standalone transmission, and we used the sum of 1-q SAR provision in KDB447498D01 to exclude the simultaneous transmitted SAR measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 56 of 106

3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{\text{f(GHz)}}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.sqs.com.tw




Page: 57 of 106

Simultaneous Transmission Combination

			Reported SAR								Scenario 3	Scenario 4	Scenario 5	Scenario 6	
		2	3	4	5	7	8	9	2+3	4+5	2+7	4+5+7	8+9	7+8+9	
Exposure Pos	sition	2.4GHz WLAN Ant Main	2.4GHzWLAN Ant Aux	5GHz WLAN Ant Main	5GHz WLAN Ant Aux	Bluetooth Ant Aux	6GHz WLAN Ant Main	6GHz WLAN Ant Main	Summed	Summed	Summed	Summed	Summed	Summed	SPLSR
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
Bottom Surface	0	0.952	0.795	1.185	0.546	0.085	0.143	0.272	1.747	1.731	1.037	1.816	0.415	0.500	Analyed as below

	Scenario 1:												
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR				
Position	Conditions	(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	SPLSK	Test				
Bottom	WLAN 2.4G Main	0.952	-9.14	-9.14	-0.38	=	-	-	-				
Surface	WLAN 2.4G Aux	0.795	-9.46	10.94	-0.33	1.747	200.83	0.011	SPLSR ≤ 0.04, Not required				

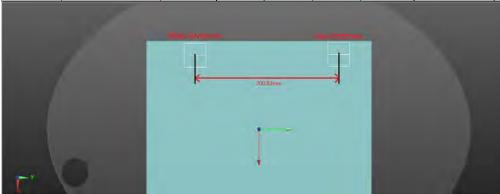

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 58 of 106

	Scenario 4												
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR				
POSITION	Conditions	(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	SPLON	Test				
	WLAN 5G Main	1.185	-9.26	-7.72	-0.35	-	-	-	-				
Bottom Surface	WLAN 5G Aux	0.546	-9.38	8.12	-0.28	1.731	158.41	0.014	SPLSR ≤ 0.04, Not required				
	WLAN 5G Aux+BT	0.631	-9.38	8.12	-0.28	1.816	158.41	0.015	SPLSR ≤ 0.04, Not required				

*For peak SAR location of WLAN Aux + BT, using the peak SAR location with smallest separation distance between WLAN Main - WLAN Aux pair and WLAN Main - BT pair to be the worst case condition.

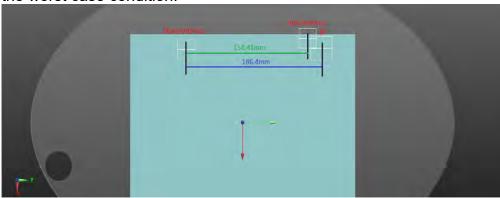

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 59 of 106

4. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
SPEAG	Dosimetric E-Field	EX3DV4	7686	Oct.05,2021	Oct.04,2022
OI L/(O	Probe	EUmmWV4	9399	Jan.28,2021	Jan.27,2022
		D2450V2	727	Apr.14,2021	Apr.13,2022
	System	D5GHzV2	1023	Jan.26.2021	Jan.25.2022
SPEAG	Validation	D6.5GHzV2	1006	Aug.26,2021	Aug.25,2022
	Dipole	D7GHzV2	1007	Aug.26,2021	Aug.25,2022
		5G-Veri10	1021	Jan.18,2021	Jan.17,2022
SPEAG	Data acquisition Electronics	DAE4	877	Mar.22,2021	Mar.21,2022
SPEAG	Software	DASY 52 V52.10.4	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not	Calibration
		mmWave	· 	required	not required
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb.17,2021	Feb.16,2022
Agilent	Dual-directional	772D	MY46151242	Aug.16.2021	Aug.15.2022
Aglient	coupler	778D	MY48220468	Aug.16.2021	Aug.15.2022
Agilent	Signal Generator	N5181A	MY50141235	May.30,2021	May.29,2022
Agilent	Power Meter	E4417A	MY51410006	Mar.23,2021	Mar.22,2022
Agilent	Power Sensor	E9301H	MY51470001	Mar.23,2021	Mar.22,2022
Agiletit	i owei Selisoi	ESSUIL	MY51470002	Mar.23,2021	Mar.22,2022
TECPEL	Digital thermometer	DTM-303A	TP130074	Apr.26,2021	Apr.25,2022
R&S	Power Sensor	NRP18S	101974	Oct.12.2021	Oct.11.2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论时,此帮生结果做影响缺少拨品台香,同時此撰品做足效的形。 木都华丰德木公司書商纯可,不可驾份海喇。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 60 of 106

5. Measurements

Date: 2021/12/17

Report No.: ES/2021/C0007

WLAN 802.11b_Body_Bottom Surface_CH 6_0mm_Main

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1.049

Medium parameters used: f = 2437 MHz; σ = 1.774 S/m; ε_r = 39.001; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn877; Calibrated: 2021/03/22

· Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.49 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.779 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.862 W/kg; SAR(10 g) = 0.363 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 42.7%

Maximum value of SAR (measured) = 1.39 W/kg

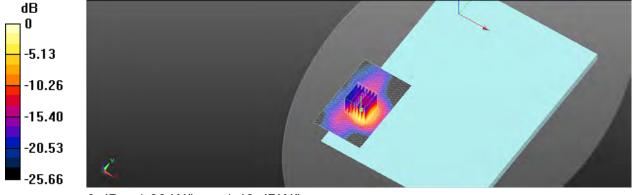

0 dB = 1.39 W/kg = 1.43 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

303 laiwan Eta.



Page: 61 of 106

Date: 2021/12/17

Report No. :ES/2021/C0007

WLAN 802.11n(40M) 5.2G_Body_Bottom Surface_CH 38_0mm_Main

Communication System: WLAN; Frequency: 5190 MHz; Duty Cycle: 1:1.068

Medium parameters used: f = 5190 MHz; σ = 4.603 S/m; ε_r = 35.645; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.16 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.155 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.54 W/kg

SAR(1 g) = 0.566 W/kg; SAR(10 g) = 0.164 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 1.21 W/kg

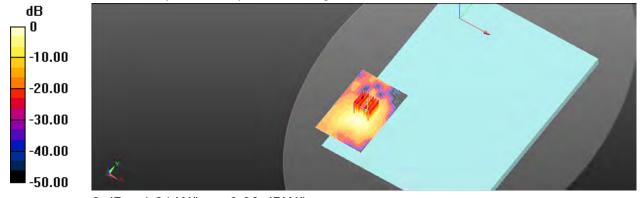

0 dB = 1.21 W/kg = 0.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 62 of 106

Date: 2021/12/17

Report No. :ES/2021/C0007

WLAN 802.11ac(80M) 5.2G_Body_Bottom Surface_CH 42_0mm_Main

Communication System: WLAN; Frequency: 5210 MHz; Duty Cycle: 1:1.233

Medium parameters used: f = 5210 MHz; σ = 4.621 S/m; ε_r = 35.578; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.48 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.745 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 3.48 W/kg

SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 1.66 W/kg

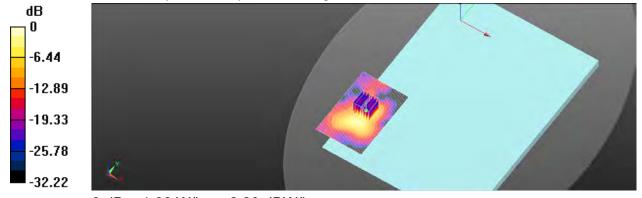

0 dB = 1.66 W/kg = 2.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 63 of 106

Date: 2021/12/17

Report No. :ES/2021/C0007

WLAN 802.11n(40M) 5.3G_Body_Bottom Surface_CH 54_0mm_Main

Communication System: WLAN; Frequency: 5270 MHz; Duty Cycle: 1:1.068

Medium parameters used: f = 5270 MHz; σ = 4.683 S/m; ε_r = 35.556; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.31 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.626 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 3.12 W/kg

SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 1.45 W/kg

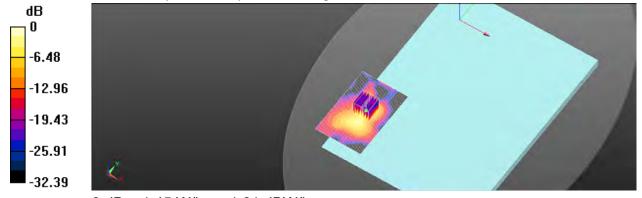

0 dB = 1.45 W/kg = 1.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 64 of 106

Date: 2021/12/17

Report No. :ES/2021/C0007

WLAN 802.11ac(80M) 5.3G_Body_Bottom Surface_CH 58_0mm_Main

Communication System: WLAN; Frequency: 5290 MHz; Duty Cycle: 1:1.233

Medium parameters used: f = 5290 MHz; σ = 4.703 S/m; ε_r = 35.522; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.55 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.788 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 3.78 W/kg

SAR(1 g) = 0.821 W/kg; SAR(10 g) = 0.225 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

Maximum value of SAR (measured) = 1.80 W/kg

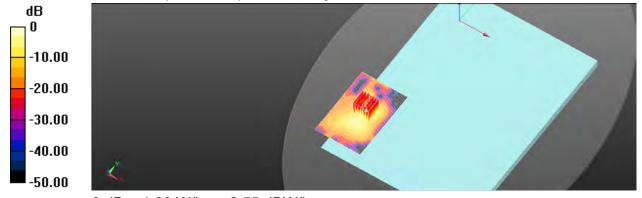

0 dB = 1.80 W/kg = 2.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 65 of 106

Date: 2021/12/18

Report No. :ES/2021/C0007

WLAN 802.11ac(80M) 5.6G_Body_Bottom Surface_CH 138_0mm Main

Communication System: WLAN; Frequency: 5690 MHz; Duty Cycle: 1:1.233

Medium parameters used: f = 5690 MHz; $\sigma = 5.11 \text{ S/m}$; $\varepsilon_r = 34.984$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.47 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.545 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 4.16 W/kg

SAR(1 g) = 0.732 W/kg; SAR(10 g) = 0.186 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 47.3%

Maximum value of SAR (measured) = 1.66 W/kg

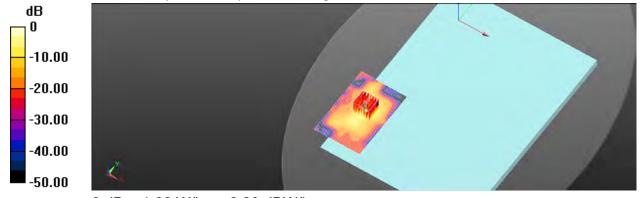

0 dB = 1.66 W/kg = 2.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 66 of 106

Date: 2021/12/18

Report No. :ES/2021/C0007

WLAN 802.11n(40M) 5.8G_Body_Bottom Surface_CH 151_0mm_Main

Communication System: WLAN; Frequency: 5755 MHz; Duty Cycle: 1:1.068

Medium parameters used: f = 5755 MHz; $\sigma = 5.145$ S/m; $\varepsilon_r = 34.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.03 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.067 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 5.88 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.251 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 47.6%

Maximum value of SAR (measured) = 2.35 W/kg

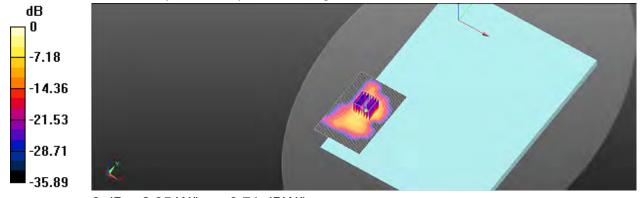

0 dB = 2.35 W/kg = 3.71 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 67 of 106

Date: 2021/12/18

Report No. :ES/2021/C0007

WLAN 802.11ac(80M) 5.8G_Body_Bottom Surface_CH 155_0mm_Main

Communication System: WLAN; Frequency: 5775 MHz; Duty Cycle: 1:1.233

Medium parameters used: f = 5775 MHz; σ = 5.169 S/m; ε_r = 34.936; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.80 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.936 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 5.39 W/kg

SAR(1 g) = 0.903 W/kg; SAR(10 g) = 0.224 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 46.9%

Maximum value of SAR (measured) = 2.12 W/kg

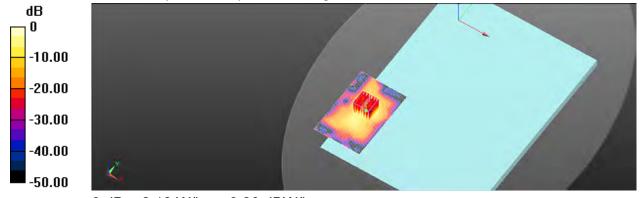

0 dB = 2.12 W/kg = 3.26 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 68 of 106

Date: 2021/12/17

Report No. :ES/2021/C0007

WLAN 802.11b Body Bottom Surface CH 1 0mm Aux

Communication System: WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1.049

Medium parameters used: f = 2412 MHz; $\sigma = 1.743$ S/m; $\varepsilon_r = 39.009$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn877; Calibrated: 2021/03/22

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.413 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.294 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 41.9%

Maximum value of SAR (measured) = 1.29 W/kg

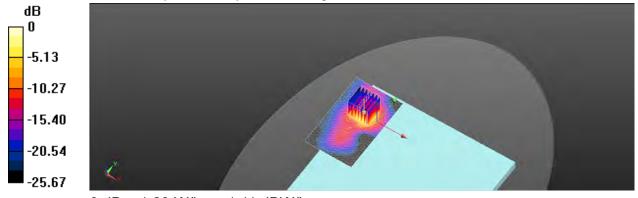

0 dB = 1.29 W/kg = 1.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 69 of 106

Date: 2021/12/17

Report No. :ES/2021/C0007

Bluetooth(GFSK)_Body_Bottom Surface_CH 0_0mm_Aux

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.297 Medium parameters used: f = 2402 MHz; $\sigma = 1.741 \text{ S/m}$; $\varepsilon_r = 39.056$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0748 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.6350 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.035 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 41%

Maximum value of SAR (measured) = 0.0797 W/kg

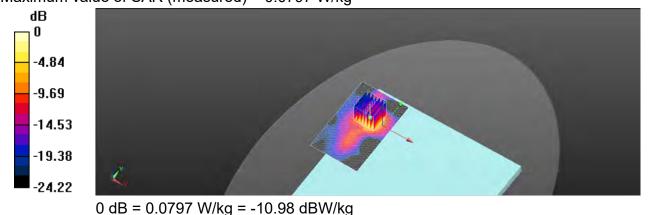

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 70 of 106

Date: 2021/12/17

Report No. :ES/2021/C0007

WLAN 802.11ac(80M) 5.2G_Body_Bottom Surface_CH 42_0mm_Aux

Communication System: WLAN; Frequency: 5210 MHz; Duty Cycle: 1:1.233

Medium parameters used: f = 5210 MHz; σ = 4.621 S/m; ε_r = 35.578; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn877; Calibrated: 2021/03/22

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.433 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9125 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.072 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 0.459 W/kg

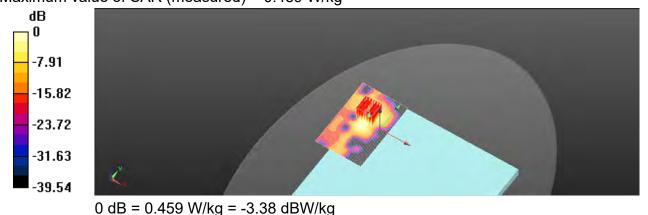

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 71 of 106

Date: 2021/12/17

Report No. :ES/2021/C0007

WLAN 802.11ac(80M) 5.3G_Body_Bottom Surface_CH 58_0mm_Aux

Communication System: WLAN; Frequency: 5290 MHz; Duty Cycle: 1:1.233

Medium parameters used: f = 5290 MHz; σ = 4.703 S/m; ε_r = 35.522; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.584 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.8457 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.060 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 0.467 W/kg

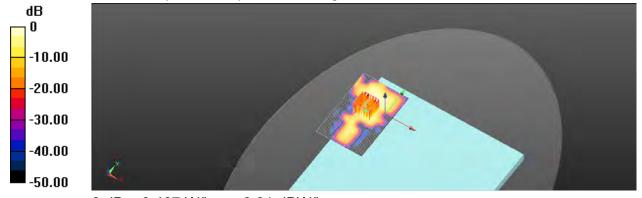

0 dB = 0.467 W/kg = -3.31 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 72 of 106

Date: 2021/12/18

Report No. :ES/2021/C0007

WLAN 802.11ac(80M) 5.6G_Body_Bottom Surface_CH 138_0mm Aux

Communication System: WLAN; Frequency: 5690 MHz; Duty Cycle: 1:1.233

Medium parameters used: f = 5690 MHz; $\sigma = 5.11 \text{ S/m}$; $\varepsilon_r = 34.984$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.267 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.7553 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.856 W/kg

SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.041 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 0.308 W/kg

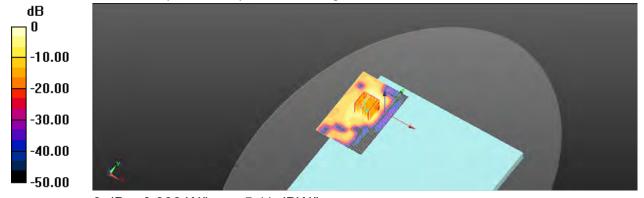

0 dB = 0.308 W/kg = -5.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 73 of 106

Date: 2021/12/18

Report No. :ES/2021/C0007

WLAN 802.11ac(80M) 5.8G Body Bottom Surface CH 155 0mm Aux

Communication System: WLAN; Frequency: 5775 MHz; Duty Cycle: 1:1.233

Medium parameters used: f = 5775 MHz; σ = 5.169 S/m; ε_r = 34.936; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.529 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.316 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 4.21 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.087 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 1.13 W/kg

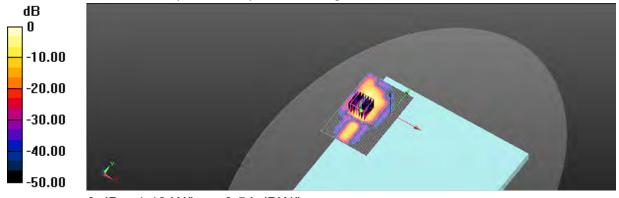

0 dB = 1.13 W/kg = 0.54 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 74 of 106

Report No. :ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-5, IEEE 802.11ax (160MHz), Channel 15 (6025.0 MHz)_Main

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type	
Device,	314.0 x 222.0 x 10.0		Laptop	

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	U-NII-5	WLAN, 10755-AAC	6025.0, 15	6.2	5.45	34.654

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	HBBL-600-10000 ,2021-Dec-19	EX3DV4 - SN7686, 2021-10-05	DAE4 Sn877, 2021-03-22

Scans Setup		
	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Υ
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results		
	Area Scan	Zoom Scan
Date	2021-12-19, 16:42	2021-12-19, 16:58
psSAR1g [W/Kg]	0.096	0.123
psSAR10g [W/Kg]	0.026	0.028
psPDab (1.0cm2, sq) [W/m2]		1.23
psPDab (4.0cm2, sq) [W/m2]		0.669
Power Drift [dB]	-0.06	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.8
Dist 3dB Peak [mm]		5.0



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 75 of 106

Report No. :ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-5, IEEE 802.11ax (160MHz), Channel 79 (6345.0 MHz)_Main

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	314.0 x 222.0 x 10.0		Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	U-NII-5	WLAN, 10755-AAC	6345.0, 79	6.2	5.831	34.311


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	HBBL-600-10000 ,2021-Dec-19	EX3DV4 - SN7686, 2021-10-05	DAE4 Sn877, 2021-03-22

Scans Setup		
	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Posuits

Measurement Results		
	Area Scan	Zoom Scan
Date	2021-12-19, 17:14	2021-12-19, 17:28
psSAR1g [W/Kg]	0.040	0.053
psSAR10g [W/Kg]	0.01	0.010
psPDab (1.0cm2, sq) [W/m2]		0.530
psPDab (4.0cm2, sq) [W/m2]		0.247
Power Drift [dB]	0.06	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		48.1
Dist 3dB Peak [mm]		4.8



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 76 of 106

Report No. :ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-6, IEEE 802.11ax (160MHz), Channel 111 (6505.0 MHz)_Main

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type	
Device,	314.0 x 222.0 x 10.0		Laptop	

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	U-NII-6	WLAN, 10755-AAC	6505.0, 111	6.2	6.016	34.115

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	HBBL-600-10000 ,2021-Dec-19	EX3DV4 - SN7686, 2021-10-05	DAE4 Sn877, 2021-03-22

Scane Setun

Area Scan	Zoom Scan
	Loom odan
68.0 x 85.0	22.0 x 22.0 x 22.0
8.5 x 8.5	3.4 x 3.4 x 1.4
3.0	1.4
Yes	Yes
1.5	1.4
Y	Y
VMS + 6p	VMS + 6p
Measured	Measured
	8.5 x 8.5 3.0 Yes 1.5 Y

Measurement Results

Measurement Results						
	Area Scan	Zoom Scan				
Date	2021-12-19, 17:40	2021-12-19, 17:59				
psSAR1g [W/Kg]	0.084	0.113				
psSAR10g [W/Kg]	0.021	0.026				
psPDab (1.0cm2, sq) [W/m2]		1.13				
psPDab (4.0cm2, sq) [W/m2]		0.608				
Power Drift [dB]	-0.07	-0.09				
Power Scaling	Disabled	Disabled				
Scaling Factor [dB]						
TSL Correction	No correction	No correction				
M2/M1 [%]		47.7				
Dist 3dB Peak [mm]		4.8				



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 77 of 106

Report No. :ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-7, IEEE 802.11ax (160MHz), Channel 143 (6665.0 MHz)_Main

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type		
Device,	314.0 x 222.0 x 10.0		Laptop		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	U-NII-7	WLAN, 10755-AAC	6665.0, 143	6.2	6.201	33.921

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	HBBL-600-10000 ,2021-Dec-19	EX3DV4 - SN7686, 2021-10-05	DAE4 Sn877, 2021-03-22

Scane Setun

Scans Setup					
	Area Scan	Zoom Scan			
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0			
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4			
Sensor Surface [mm]	3.0	1.4			
Graded Grid	Yes	Yes			
Grading Ratio	1.5	1.4			
MAIA	Y	Y			
Surface Detection	VMS + 6p	VMS + 6p			
Scan Method	Measured	Measured			

Measurement Results

Measurement Results					
	Area Scan	Zoom Scan			
Date	2021-12-19, 18:20	2021-12-19, 18:39			
psSAR1g [W/Kg]	0.066	0.085			
psSAR10g [W/Kg]	0.015	0.017			
psPDab (1.0cm2, sq) [W/m2]		0.848			
psPDab (4.0cm2, sq) [W/m2]		0.418			
Power Drift [dB]	-0.09	-0.06			
Power Scaling	Disabled	Disabled			
Scaling Factor [dB]					
TSL Correction	No correction	No correction			
M2/M1 [%]		46.0			
Dist 3dB Peak [mm]		4.6			



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 78 of 106

Report No. :ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-8, IEEE 802.11ax (160MHz), Channel 207 (6985.0 MHz)_Main

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type		
Device,	314.0 x 222.0 x 10.0		Laptop		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	U-NII-8	WLAN, 10755-AAC	6985.0, 207	6.14	6.565	33.562

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	HBBL-600-10000 ,2021-Dec-19	EX3DV4 - SN7686, 2021-10-05	DAE4 Sn877, 2021-03-22

Scane Setun

Scans Setup					
Area Scan	Zoom Scan				
68.0 x 85.0	22.0 x 22.0 x 22.0				
8.5 x 8.5	3.4 x 3.4 x 1.4				
3.0	1.4				
Yes	Yes				
1.5	1.4				
Y	Y				
VMS + 6p	VMS + 6p				
Measured	Measured				
	68.0 x 85.0 8.5 x 8.5 3.0 Yes 1.5 Y				

Measurement Results

weasurement results				
	Area Scan	Zoom Scan		
Date	2021-12-19, 18:56	2021-12-19, 19:09		
psSAR1g [W/Kg]	0.033	0.036		
psSAR10g [W/Kg]	0.007	0.009		
psPDab (1.0cm2, sq) [W/m2]		0.359		
psPDab (4.0cm2, sq) [W/m2]		0.222		
Power Drift [dB]	0.09	0.12		
Power Scaling	Disabled	Disabled		
Scaling Factor [dB]				
TSL Correction	No correction	No correction		
M2/M1 [%]		59.5		
Dist 3dB Peak [mm]		5.0		



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279



Page: 79 of 106

Report No. :ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-5, IEEE 802.11ax (160MHz), Channel 15 (6025.0 MHz)_Aux

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	314.0 x 222.0 x 10.0		Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	U-NII-5	WLAN, 10755-AAC	6025.0, 15	6.2	5.45	34.654

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	HBBL-600-10000 ,2021-Dec-19	EX3DV4 - SN7686, 2021-10-05	DAE4 Sn877, 2021-03-22

Scane Setun

Scans Setup			
	Area Scan	Zoom Scan	
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0	
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	
Sensor Surface [mm]	3.0	1.4	
Graded Grid	Yes	Yes	
Grading Ratio	1.5	1.4	
MAIA	Y	Y	
Surface Detection	VMS + 6p	VMS + 6p	
Scan Method	Measured	Measured	

Measurement Results

Measurement Results				
	Area Scan	Zoom Scan		
Date	2021-12-19, 19:23	2021-12-19, 19:40		
psSAR1g [W/Kg]	0.039	0.043		
psSAR10g [W/Kg]	0.008	0.009		
psPDab (1.0cm2, sq) [W/m2]		0.427		
psPDab (4.0cm2, sq) [W/m2]		0.224		
Power Drift [dB]	-0.18	-0.12		
Power Scaling	Disabled	Disabled		
Scaling Factor [dB]				
TSL Correction	No correction	No correction		
M2/M1 [%]		49.9		
Dist 3dB Peak [mm]		5.2		



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 80 of 106

Report No. :ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-5, IEEE 802.11ax (160MHz), Channel 79 (6345.0 MHz)_Aux

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	314.0 x 222.0 x 10.0		Laptop

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	U-NII-5	WLAN, 10755-AAC	6345.0, 79	6.2	5.831	34.311

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	HBBL-600-10000 ,2021-Dec-19	EX3DV4 - SN7686, 2021-10-05	DAE4 Sn877, 2021-03-22

Scans Setup			
	Area Scan	Zoom Scan	
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0	
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	
Sensor Surface [mm]	3.0	1.4	
Graded Grid	Yes	Yes	
Grading Ratio	1.5	1.4	
MAIA	Y	Y	
Surface Detection	VMS + 6p	VMS + 6p	
Scan Method	Measured	Measured	

Measurement Results				
	Area Scan	Zoom Scan		
Date	2021-12-19, 19:55	2021-12-19, 20:12		
psSAR1g [W/Kg]	0.032	0.040		
psSAR10g [W/Kg]	0.007	0.007		
psPDab (1.0cm2, sq) [W/m2]		0.398		
psPDab (4.0cm2, sq) [W/m2]		0.177		
Power Drift [dB]	0.13	0.15		
Power Scaling	Disabled	Disabled		
Scaling Factor [dB]				
TSL Correction	No correction	No correction		
M2/M1 [%]		47.7		
Dist 3dB Peak [mm]		3.5		



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 81 of 106

Report No. :ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-6, IEEE 802.11ax (160MHz), Channel 111 (6505.0 MHz)_Aux

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type	
Device,	314.0 x 222.0 x 10.0		Laptop	

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	U-NII-6	WLAN, 10755-AAC	6505.0, 111	6.2	6.016	34.115


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	HBBL-600-10000 ,2021-Dec-19	EX3DV4 - SN7686, 2021-10-05	DAE4 Sn877, 2021-03-22

Scans Setup					
	Area Scan	Zoom Scan			
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0			
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4			
Sensor Surface [mm]	3.0	1.4			
Graded Grid	Yes	Yes			
Grading Ratio	1.5	1.4			
MAIA	Y	Y			
Surface Detection	VMS + 6p	VMS + 6p			
Scan Method	Measured	Measured			

Measurement Results

Measurement Results					
	Area Scan	Zoom Scan			
Date	2021-12-19, 20:24	2021-12-19, 20:38			
psSAR1g [W/Kg]	0.049	0.057			
psSAR10g [W/Kg]	0.009	0.011			
psPDab (1.0cm2, sq) [W/m2]		0.574			
psPDab (4.0cm2, sq) [W/m2]		0.269			
Power Drift [dB]	0.04	0.15			
Power Scaling	Disabled	Disabled			
Scaling Factor [dB]					
TSL Correction	No correction	No correction			
M2/M1 [%]		46.2			
Dist 3dB Peak [mm]		4.4			



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 82 of 106

Report No.: ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-7, IEEE 802.11ax (160MHz), Channel 143 (6665.0 MHz)_Aux

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	314.0 x 222.0 x 10.0		Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	U-NII-7	WLAN, 10755-AAC	6665.0, 143	6.2	6.201	33.921

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	HBBL-600-10000 ,2021-Dec-19	EX3DV4 - SN7686, 2021-10-05	DAE4 Sn877, 2021-03-22

Scane Setun

Scans Setup					
	Area Scan	Zoom Scan			
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0			
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4			
Sensor Surface [mm]	3.0	1.4			
Graded Grid	Yes	Yes			
Grading Ratio	1.5	1.4			
MAIA	Y	Y			
Surface Detection	VMS + 6p	VMS + 6p			
Scan Method	Measured	Measured			

Measurement Results

Measurement Results		
	Area Scan	Zoom Scan
Date	2021-12-19, 20:49	2021-12-19, 21:03
psSAR1g [W/Kg]	0.041	0.051
psSAR10g [W/Kg]	0.009	0.01
psPDab (1.0cm2, sq) [W/m2]		0.513
psPDab (4.0cm2, sq) [W/m2]		0.240
Power Drift [dB]	0.05	0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		44.3
Dist 3dB Peak [mm]		4.3



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 83 of 106

Report No. :ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-8, IEEE 802.11ax (160MHz), Channel 207 (6985.0 MHz)_Aux

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type		
Device,	314.0 x 222.0 x 10.0		Laptop		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	U-NII-8	WLAN, 10755-AAC	6985.0, 207	6.14	6.565	33.562

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	HBBL-600-10000 ,2021-Dec-19	EX3DV4 - SN7686, 2021-10-05	DAE4 Sn877, 2021-03-22

Scane Setun

Scans Setup		
	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

Measurement Results		
	Area Scan	Zoom Scan
Date	2021-12-19, 21:16	2021-12-19, 21:30
psSAR1g [W/Kg]	0.200	0.232
psSAR10g [W/Kg]	0.051	0.050
psPDab (1.0cm2, sq) [W/m2]		2.32
psPDab (4.0cm2, sq) [W/m2]		1.18
Power Drift [dB]	-0.09	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		47.2
Dist 3dB Peak [mm]		4.8



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 84 of 106

Report No.: ES/2021/C0007

Measurement Report for Device, Bottom Surface, U-NII-5, IEEE 802.11ax (160MHz), Channel 15 (6025.0 MHz)_Main Device Under Test Properties


Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	314.0 x 220.0 x 12.0		Laptop

Exposure Conditions					
Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Surface, 2.00	U-NII-5	WLAN, 10755-AAC	6025.0. 15	1.0

Hardware Setup			
Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-78GHz, 2021-01-28	DAE4 Sn877, 2021-03-22

Scans Setup	
Scan Type	5G Scar
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A
Measurement Results	
Scan Type	5G Scar

Scan Type	5G Scan
Date	2021-12-20, 21:26
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	0.253
psPDtot+ [W/m²]	0.314
psPDmod+ [W/m²]	0.441
E _{max} [V/m]	18.7
Power Drift [dB]	-0.03

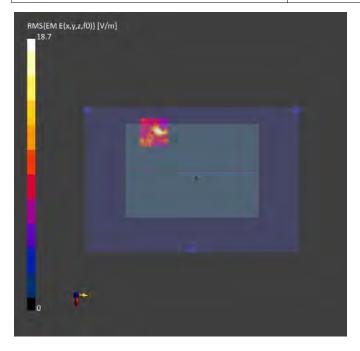

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the low. prosecuted to the fullest extent of the law.



Scane Sotup

Report No.: ES/2021/C0007

Page: 85 of 106

Report No.: ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-5, IEEE 802.11ax (160MHz), Channel 79 (6345.0 MHz)_Main
Device Under Test Properties


Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	314.0 x 220.0 x 12.0		Laptop

Exposure Conditions					
Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Surface, 2.00	U-NII-5	WLAN, 10755-AAC	6345.0. 79	1.0

Hardware Setup					
Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date		
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-78GHz, 2021-01-28	DAE4 Sn877, 2021-03-22		

Scans Setup	
Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A
Measurement Results	
Scan Type	5G Scan
	2004 40 00 00 00

Scan Type	5G Scan
Date	2021-12-20, 22:08
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	0.332
psPDtot+ [W/m²]	0.381
psPDmod+ [W/m²]	0.469
E _{max} [V/m]	15.8
Power Drift [dB]	-0.06

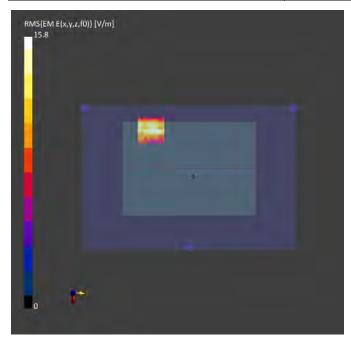

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生红用攝影測建立幾只有書,同時此幾旦萬風宛の干。大報生土極大公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/lerms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/lerms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 86 of 106

Report No.: ES/2021/C0007

Measurement Report for Device, Bottom Surface, U-NII-6, IEEE 802.11ax (160MHz), Channel 111 (6505.0 MHz)_Main Device Under Test Properties


Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	314.0 x 220.0 x 12.0		Laptop

Exposure Conditions					
Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Surface, 2.00	U-NII-6	WLAN, 10755-AAC	6505.0. 111	1.0

Hardware Setup	ardware Setup				
Phantom Medium		Probe, Calibration Date	DAE, Calibration Date		
mmWave - 1076 Air -		EUmmWV3 - SN9399_F1-78GHz, 2021-01-28	DAE4 Sn877, 2021-03-22		

Scans Setup		
Scan Type		5G Scan
Grid Extents [mm]		60.0 x 60.0
Grid Steps [lambda]	0.0625 x 0.0625	
Sensor Surface [mm]	2.0	
MAIA	N/A	
Measurement Results		
Scan Type		5G Scan
Date	2021-12-20, 22:50	

Scan Type	5G Scan
Date	2021-12-20, 22:50
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	0.224
psPDtot+ [W/m²]	0.251
psPDmod+ [W/m²]	0.341
E _{max} [V/m]	15.5
Power Drift [dB]	0.03

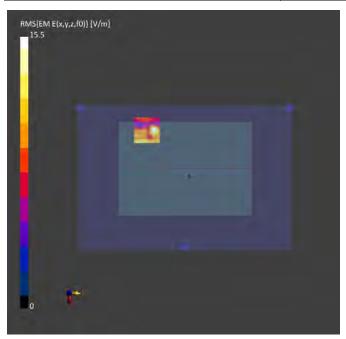

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時世樣是僅是図の主。大報生主經太公司書面許可,不可與公詢制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 87 of 106

Report No.: ES/2021/C0007

Measurement Report for Device, Bottom Surface, U-NII-7, IEEE 802.11ax (160MHz), Channel 143 (6665.0 MHz)_Main Device Under Test Properties


Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	314.0 x 220.0 x 12.0		Laptop

Exposure Conditions					
Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Surface, 2.00	U-NII-7	WLAN, 10755-AAC	6665.0. 143	1.0

Hardware Setup	ardware Setup			
Phantom Medium		Probe, Calibration Date	DAE, Calibration Date	
mmWave - 1076 Air -		EUmmWV3 - SN9399_F1-78GHz, 2021-01-28	DAE4 Sn877, 2021-03-22	

Scans Setup					
Scan Type	5G Scan				
Grid Extents [mm]	60.0 x 60.0				
Grid Steps [lambda]	0.0625 x 0.0625				
Sensor Surface [mm]	2.0				
MAIA	N/A				
Measurement Results					
Scan Type	5G Scan				

Scan Type	5G Scan
Date	2021-12-20, 23:30
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	0.197
psPDtot+ [W/m²]	0.275
psPDmod+ [W/m²]	0.336
E _{max} [V/m]	13.6
Power Drift [dB]	0.09

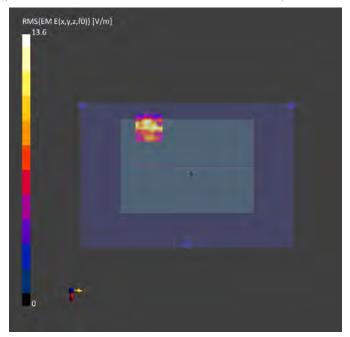

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the low. prosecuted to the fullest extent of the law.



Page: 88 of 106

Report No.: ES/2021/C0007

Measurement Report for Device, Bottom Surface, U-NII-8, IEEE 802.11ax (160MHz), Channel 207 (6985.0 MHz)_Main

Device Under Test Properties


Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	314.0 x 220.0 x 12.0		Laptop

Exposure Conditions						
	Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
	5G Air	Bottom Surface, 2.00	U-NII-8	WLAN, 10755-AAC	6985.0, 207	1.0

Hardware Setup						
Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date			
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-78GHz, 2021-01-28	DAE4 Sn877, 2021-03-22			

Scans Setup	
Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A
Measurement Results	
Scan Type	5G Scan

Weasurement Results	
Scan Type	5G Scan
Date	2021-12-20, 17:12
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	0.105
psPDtot+ [W/m²]	0.121
psPDmod+ [W/m²]	0.140
E _{max} [V/m]	9.74
Power Drift [dB]	0.09

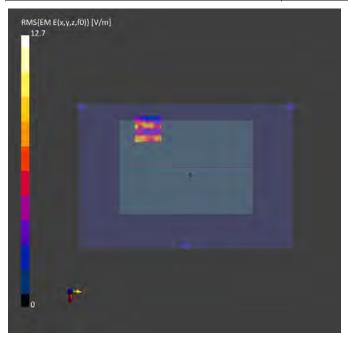

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 89 of 106

Report No. : ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-5, IEEE 802.11ax (160MHz), Channel 15 (6025.0 MHz)_Aux
Device Under Test Properties


Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	314.0 x 220.0 x 12.0		Laptop

Exposure Conditions					
Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Surface, 2.00	U-NII-5	WLAN, 10755-AAC	6025.0, 15	1.0

Hardware Setup							
Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date				
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-78GHz, 2021-01-28	DAE4 Sn877, 2021-03-22				

Scans Setup		
Scan Type	5G	Scan
Grid Extents [mm]	60.00	x 60.0
Grid Steps [lambda]	0.0625 x 0	.0625
Sensor Surface [mm]		2.0
MAIA		N/A
Measurement Results		
Scan Type	5G	Scan
Date	2021 12 20	20:47

Scan Type	5G Scan
Date	2021-12-20, 20:47
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	0.288
psPDtot+ [W/m²]	0.330
psPDmod+ [W/m²]	0.380
E _{max} [V/m]	15.7
Power Drift [dB]	0.12

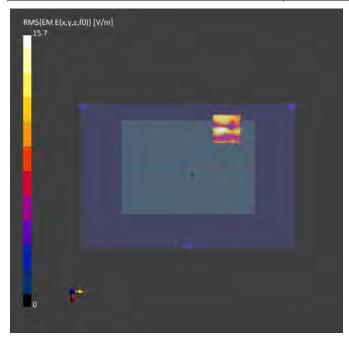

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sqs.com.tw



Page: 90 of 106

Report No.: ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-5, IEEE 802.11ax (160MHz), Channel 79 (6345.0 MHz)_Aux
Device Under Test Properties


Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	314.0 x 220.0 x 12.0		Laptop

Exposure Conditions					
Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Surface 2.00	LI NIII 5	WI AN 10755 AAC	6345.0.70	1.0

Hardware Setup						
Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date			
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-78GHz, 2021-01-28	DAE4 Sn877, 2021-03-22			

Scans Setup			
Scan Type	5G Scan		
Grid Extents [mm]	60.0 x 60.0		
Grid Steps [lambda]	0.0625 x 0.0625		
Sensor Surface [mm]	2.0		
MAIA	N/A		
Measurement Results			
Scan Type	5G Scan		

Weasurement Results	
Scan Type	5G Scan
Date	2021-12-20, 20:04
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	0.240
psPDtot+ [W/m²]	0.258
psPDmod+ [W/m²]	0.316
E _{max} [V/m]	14.8
Power Drift [dB]	0.11

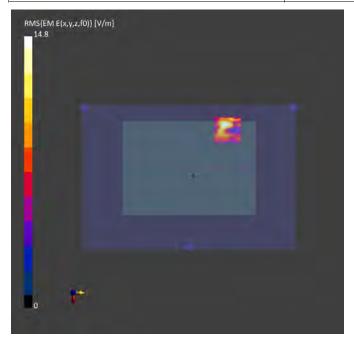

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時世樣是僅是図の主。大報生主經太公司書面許可,不可與公詢制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 91 of 106

Report No. : ES/2021/C0007

Measurement Report for Device, Bottom Surface, U-Nil-6, IEEE 802.11ax (160MH), Channel 111 (6505.0 MHz)_Aux
Device Under Test Properties


Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	314.0 x 220.0 x 12.0		Laptop

Exposure Conditions					
Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Surface, 2.00	U-NII-6	WLAN, 10755-AAC	6505.0, 111	1.0

Hardware Setup			
Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-78GHz, 2021-01-28	DAE4 Sn877, 2021-03-22

Scans Setup	
Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A
Measurement Results	
Scan Type	5G Scan
D-1-	2024 42 20 40:47

50.0
5G Scan
2021-12-20, 19:17
4.00
0.251
0.277
0.312
13.4
-0.13

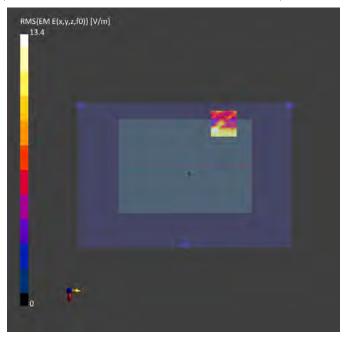

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the low. prosecuted to the fullest extent of the law.



Scane Sotup

Report No.: ES/2021/C0007

Page: 92 of 106

Report No.: ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-7, IEEE 802.11ax (160MHz), Channel 143 (6665.0 MHz)_Aux
Device Under Test Properties


Model, Manufacturer Dimensions [mm]		IMEI	DUT Type
Device,	314.0 x 220.0 x 12.0		Laptop

Exposure Conditions					
Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Surface 2.00	H-NII-7	WI AN 10755-AAC	6665 0 143	1.0

Hardware Setup			
Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-78GHz, 2021-01-28	DAE4 Sn877, 2021-03-22

Scalls Setup	A CONTRACTOR OF THE CONTRACTOR
Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A
Measurement Results	
Scan Type	5G Scan

Scan Type	5G Scan
Date	2021-12-20, 18:37
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	0.307
psPDtot+ [W/m²]	0.324
psPDmod+ [W/m²]	0.346
E _{max} [V/m]	13.3
Power Drift [dB]	-0.15

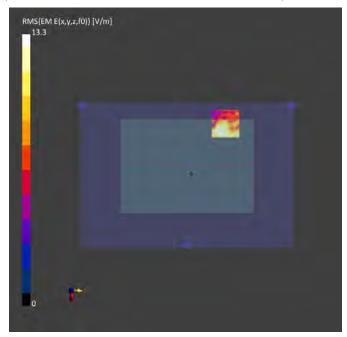

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非足有论阻,此器华结里属影响对文梯是各青,同時此樣是属星短00千。未器华主领太公司皇而连行,太可驾必複制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 93 of 106

Report No.: ES/2021/C0007
Measurement Report for Device, Bottom Surface, U-NII-8, IEEE 802.11ax (160MHz), Channel 207 (6985.0 MHz)_Aux
Device Under Test Properties


Model, Manufacturer Dimensions [mm]		IMEI	DUT Type
Device,	314.0 x 220.0 x 12.0		Laptop

	Exposure Conditions					
Phantom Section Position, Test Distance [mm] 5G Air Bottom Surface 2 00		Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
		Bottom Surface 2.00	I I-NII-8	WLAN 10755-AAC	6985.0. 207	1.0

Hardware Setup	lardware Setup					
Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date			
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-78GHz, 2021-01-28	DAE4 Sn877, 2021-03-22			

5G Scan					
60.0 x 60.0					
0.0625 x 0.0625					
2.0					
N/A					
Measurement Results					
5G Scan					
-					

Scan Type	5G Scan
Date	2021-12-20, 17:53
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	0.659
psPDtot+ [W/m²]	0.813
psPDmod+ [W/m²]	0.936
E _{max} [V/m]	24.4
Power Drift [dB]	0.09

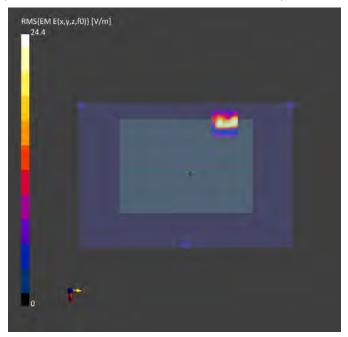

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 94 of 106

6. SAR System Performance Verification

Date: 2021/12/17

Report No. :ES/2021/C0007 Dipole 2450 MHz SN:727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.782 \text{ S/m}$; $\varepsilon_r = 38.973$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn877; Calibrated: 2021/03/22

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x61x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 26.3 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.1 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 32.8 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.16 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 24.8 W/kg

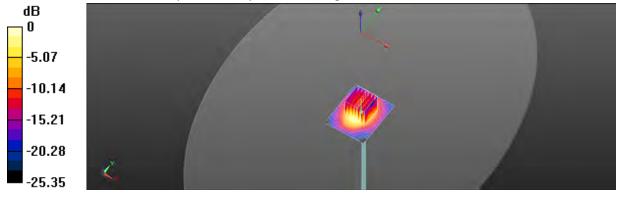

0 dB = 24.8 W/kg = 13.74 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 95 of 106

Date: 2021/12/17

Report No. :ES/2021/C0007 **Dipole 5200 MHz SN:1023**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5200 MHz; σ = 4.614 S/m; ε_r = 35.608; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.5 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 64.05 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 30.8 W/kg

SAR(1 g) = 7.89 W/kg; SAR(10 g) = 2.24 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 15.5 W/kg

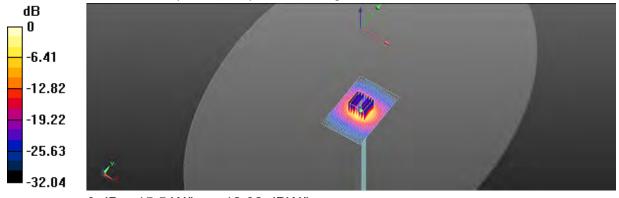

0 dB = 15.5 W/kg = 12.02 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 96 of 106

Date: 2021/12/17

Report No. :ES/2021/C0007 **Dipole 5300 MHz SN:1023**

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5300 MHz; σ = 4.713 S/m; ε_r = 35.494; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.3 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 63.82 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 30.8 W/kg

SAR(1 g) = 7.88 W/kg; SAR(10 g) = 2.26 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 16.0 W/kg

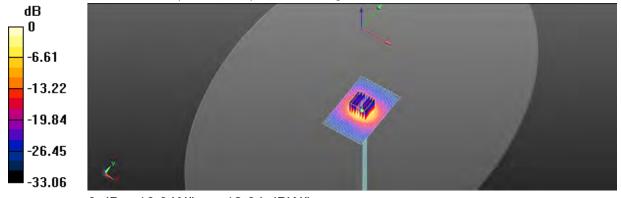

0 dB = 16.0 W/kg = 12.04 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 97 of 106

Date: 2021/12/18

Report No. :ES/2021/C0007 **Dipole 5600 MHz SN:1023**

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5600 MHz; σ = 5.019 S/m; ε_r = 35.12; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.5 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 61.95 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 35.5 W/kg

SAR(1 g) = 8.21 W/kg; SAR(10 g) = 2.37 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 16.6 W/kg

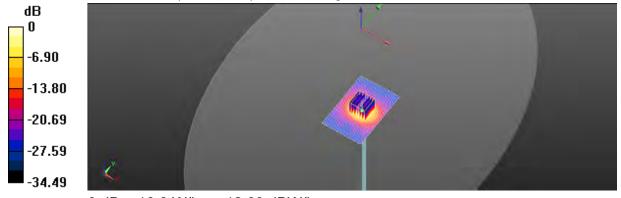

0 dB = 16.6 W/kg = 12.09 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 98 of 106

Date: 2021/12/18

Report No. :ES/2021/C0007 **Dipole 5800 MHz SN:1023**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5800 MHz; σ = 5.186 S/m; ε_r = 34.915; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 19.2 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 64.49 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 37.1 W/kg

SAR(1 g) = 8.19 W/kg; SAR(10 g) = 2.28 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.4%

Maximum value of SAR (measured) = 18.8 W/kg

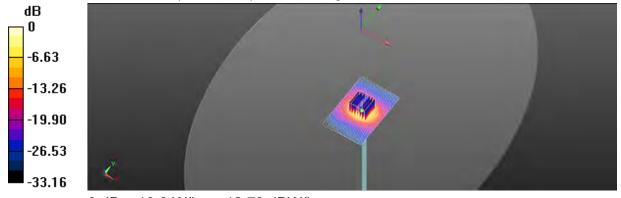

0 dB = 18.8 W/kg = 12.73 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 99 of 106

Report No. :ES/2021/C0007 Measurement Report for Device, FRONT, Validation band, CW, Channel 6500 (6500.0 MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	16.0 x 6.0 x 300.0	SN:1006	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	Validation band	CW, 0	6500.0, 6500	6.2	6.006	34.121

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	HBBL-600-10000 ,2021-Dec-19	EX3DV4 - SN7686, 2021-10-05	DAE4 Sn877, 2021-03-22

Scane Sotun

Scans Setup				
	Area Scan	Zoom Scan		
Grid Extents [mm]	51.0 x 51.0	28.0 x 28.0 x 24.0		
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4		
Sensor Surface [mm]	3.0	1.4		
Graded Grid	No	Yes		
Grading Ratio	n/a	1.4		
MAIA	Υ	Y		
Surface Detection	VMS + 6p	VMS + 6p		
Scan Method	Measured	Measured		

Measurement Results

Measurement Results		
	Area Scan	Zoom Scan
Date	2021-12-19, 06:25	2021-12-19, 06:40
psSAR1g [W/Kg]	25.3	29.5
psSAR10g [W/Kg]	4.76	5.15
Power Drift [dB]	0.03	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		50.7
Dist 3dB Peak [mm]		4.4

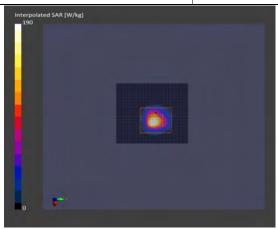

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 100 of 106

Report No. :ES/2021/C0007

Measurement Report for Device, FRONT, Validation band, CW, Channel 7000 (7000.0 MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	14.0 x 6.0 x 297.0	SN:1007	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	Validation band	CW, 0	7000.0, 7000	6.14	6.585	33.541

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	HBBL-600-10000 ,2021-Dec-19	EX3DV4 - SN7686, 2021-10-05	DAE4 Sn877, 2021-03-22

Scane Sotup

ns Setup						
Area Scan	Zoom Scan					
45.0 x 45.0	28.0 x 28.0 x 24.0					
7.5 x 7.5	3.4 x 3.4 x 1.4					
3.0	1.4					
Yes	Yes					
1.5	1.4					
Υ	Υ					
VMS + 6p	VMS + 6p					
Measured	Measured					
	45.0 x 45.0 7.5 x 7.5 3.0 Yes 1.5 Y					

Massurament Basulta

Measurement Results		
	Area Scan	Zoom Scan
Date	2021-12-19, 07:01	2021-12-19, 07:16
psSAR1g [W/Kg]	23.4	27.1
psSAR10g [W/Kg]	4.75	4.69
Power Drift [dB]	0.08	0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		49.3
Dist 3dB Peak [mm]		4.8

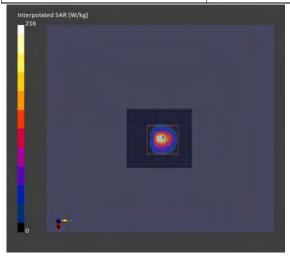

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 101 of 106

Report No.: ES/2021/C0007

Measurement Report for 10G Source, Front, Validation band, CW, Channel 10000 (10000.0 MHz)

Device Officer rest Properties			
Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
5C Varification Source 10 CHz	100.0 × 100.0 × 172.0	SN: 1021	

Exposure Conditions


Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Front, 10.00	Validation band	CW, 0	10000.0, 10000	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-78GHz, 2021-01-28	DAE4 Sn877, 2021-03-22

Scans Setup	
Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	N/A

Measurement Results	
Scan Type	5G Scan
Date	2021-12-20, 16:20
Avg. Area [cm²]	1.00
psPDn+ [W/m²]	41.4
psPDtot+ [W/m²]	41.5
psPDmod+ [W/m²]	41.7
E _{max} [V/m]	134
Power Drift [dB]	-0.01

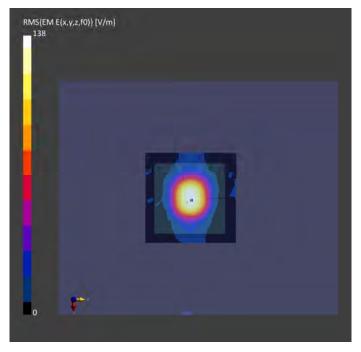

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the low. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 102 of 106

7. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertaint	Probabili ty	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	1.14%	N	1	1	0.64	0.43	0.73%	0.49%	М
Liquid Conductivity (mea.)	1.59%	N	1	1	0.6	0.49	0.95%	0.78%	М
Combined standard uncertainty		RSS					11.78%	11.74%	
Expant uncertainty (95% confidence							23.55%	23.49%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想生红用做影响起力操具负责,同时此模具做是例如于。木型生土硕木公司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 103 of 106

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

Α	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertaint	Probabili ty	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	0.67%	N	1	1	0.64	0.43	0.43%	0.29%	М
Liquid Conductivity (mea.)	1.02%	N	1	1	0.6	0.49	0.61%	0.50%	М
Combined standard uncertainty		RSS					11.44%	11.42%	
Expant uncertainty (95% confidence							22.88%	22.85%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想生红用做影响起力操具负责,同时此模具做是例如于。木型生土硕木公司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 104 of 106

DASY6 Uncertainty Budget According to IEC/IEEE 62209-1528 (Frequency band: 6GHz - 10GHz range)

	(1.160	quency	Danu	. 00112	- 100	niz ia	iige <i>)</i>	
а	b	С	d		е	е	f=b * e / d	f=b * e / d
Source of Uncertainty	Uncertainty Value (±%)	Probability Distributioin	Div.	Div. Value	(ci) 1g	(ci) 10g	Std. uncertainty (1g) (±%)	Std. uncertainty (10g) (±%)
Measurement system errors								
Probe calibration	18.6	N	2	2	1	1	9.3	9.3
Probe Calibration Drift	1.7	R	√3	1.732	1	1	1.0	1.0
Probe Linearity	4.7	R	√3	1.732	1	1	2.7	2.7
Broadband Signal	2.8	R	√3	1.732	1	1	1.6	1.6
Probe Isotropy	7.6	R	√3	1.732	1	1	4.4	4.4
Data Acquisition	0.3	N	1	1	1	1	0.3	0.3
RF Ambient	1.8	N	1	1	1	1	1.8	1.8
Probe positioning	0.2	N	1	1	0.67	0.67	0.1	0.1
Data Processing	3.5	N	1	1	1	1	3.5	3.5
Phantom and device errors								
Conductivity (meas.)DAK	2.5	N	1	1	0.78	0.71	2.0	1.8
Conductivity (temp.)BB	2.4	R	√3	1.732	0.78	0.71	1.1	1.0
Phantom Permittivity	14.0	R	√3	1.732	0.5	0.5	4.0	4.0
Distance DUT - TSL	2.0	N	1	1	2	2	4.0	4.0
Device Positioning (±0.5mm)	1.0	N	1	1	1	1	1.0	1.0
Device Holder	3.6	N	1	1	1	1	3.6	3.6
DUT Modulationm	2.4	R	√3	1.732	1	1	1.4	1.4
Time-average SAR	0.0	R	√3	1.732	1	1	0.0	0.0
DUT drift	2.5	N	1	1	1	1	2.5	2.5
Val Antenna Unc.	0.0	N	1	1	1	1	0.0	0.0
Unc. Input Power	0.0	N	1	1	1	1	0.0	0.0
Correction to the SAR results								
Deviation to Target	1.90	N	1	1	1	0.84	1.9	1.6
SAR scaling	0.250	R	√3	1.732	1	1	0.1	0.1
Combined Std. uncertainty							14.0	13.9
Expanded Std. uncertainty (95% confidence interval), K=2							28.0	27.8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想生红用做影响起力操具负责,同时此模具做是例如于。木型生土硕木公司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 105 of 106

cDASY6 Module mmWave Uncertainty Budget for PD Evaluation Distances to the Antennas $\geq \lambda/5$ In Compliance with IEC/IEEE 63195

a	b	С	d		е	f=b * e / d	g
Source of Uncertainty	Uncertainty Value (+-dB)	Probability Distributioin	Div.	Div. Value	ci	Std. uncertainty (+-dB)	(vi) Veff
Uncertainty terms dependent on the	e measurement	system					
Probe calibration	0.49	N	1	1	1	0.49	œ
Probe correction	0.00	R	√3	1.732	1	0.00	œ
Frequency response (BW≤1GHz)	0.20	R	√3	1.732	1	0.12	80
Sensor cross coupling	0.00	R	√3	1.732	1	0.00	00
Isotropy	0.50	R	√3	1.732	1	0.29	00
Linearity	0.20	R	√3	1.732	1	0.12	œ
Probe scattering	0.00	R	√3	1.732	1	0.00	œ
Probe positioning offset	0.30	R	√3	1.732	1	0.17	œ
Probe positioning repeatability	0.04	R	√3	1.732	1	0.02	œ
Sensor mechanical offset	0.00	R	√3	1.732	1	0.00	œ
Probe spatial resolution	0.00	R	√3	1.732	1	0.00	00
Field impedance dependance	0.00	R	√3	1.732	1	0.00	00
Amplitude and phase drift	0.00	R	√3	1.732	1	0.00	00
Amplitude and phase noise	0.04	R	√3	1.732	1	0.02	00
Measurement area truncation	0.00	R	√3	1.732	1	0.00	00
Data acquisition	0.03	N	1	1	1	0.03	œ
Sampling	0.00	R	√3	1	1	0.00	∞
Field reconstruction	2.00	R	√3	1.732	1	1.15	00
Forward transformation	0.00	R	√3	1.732	1	0.00	00
Power density scaling	-	R	√3	1.732	1	-	∞
Spatial averaging	0.10	R	√3	1.732	1	0.06	∞
System detection limit	0.04	R	√3	1.732	1	0.02	œ
Uncertainty terms dependent on the	e DUT and envi	onmental facto	ors				•
Probe coupling with DUT	0.00	R	√3	1.732	1	0.00	∞
Modulation response	0.40	R	√3	1.732	1	0.23	∞
Integration time	0.00	R	√3	1.732	1	0.00	∞
Response time	0.00	R	√3	1.732	1	0.00	00
Device holder influence	0.10	R	√3	1.732	1	0.06	00
DUT alignment	0.00	R	√3	1.732	1	0.00	00
RF ambient conditions	0.04	R	√3	1.732	1	0.02	00
Ambient reflections	0.04	R	√3	1.732	1	0.02	00
Immunity / secondary reception	0.00	R	√3	1.732	1	0.00	œ
Drift of the DUT	-	R	√3	1.732	1	-	00
Combined Std. uncertainty						1.33	
Expanded Std. uncertainty (95% confidence interval), K=2						2.67	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 106 of 106

Appendixes

Refer to separated files for the following appendixes.

ES2021C0007 SAR_Appendix A Photographs

ES2021C0007 SAR_Appendix B DAE & Probe Cal. Certificate

ES2021C0007 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報先结里僅對剛建之樣是各書,同時件樣是僅是200千。木報先去經太公司事而許可,不可執份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.