

Annex A. Plots of System Verification

The plots for system verification are shown as follows.

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/07/15

S01 System Check_H2450_220715

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0715 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.758$ S/m; $\epsilon_r = 38.541$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.82, 7.82, 7.82) @ 2450 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 4.72 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 53.31 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 5.94 W/kg

SAR(1 g) = 2.82 W/kg; SAR(10 g) = 1.32 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.69 W/kg

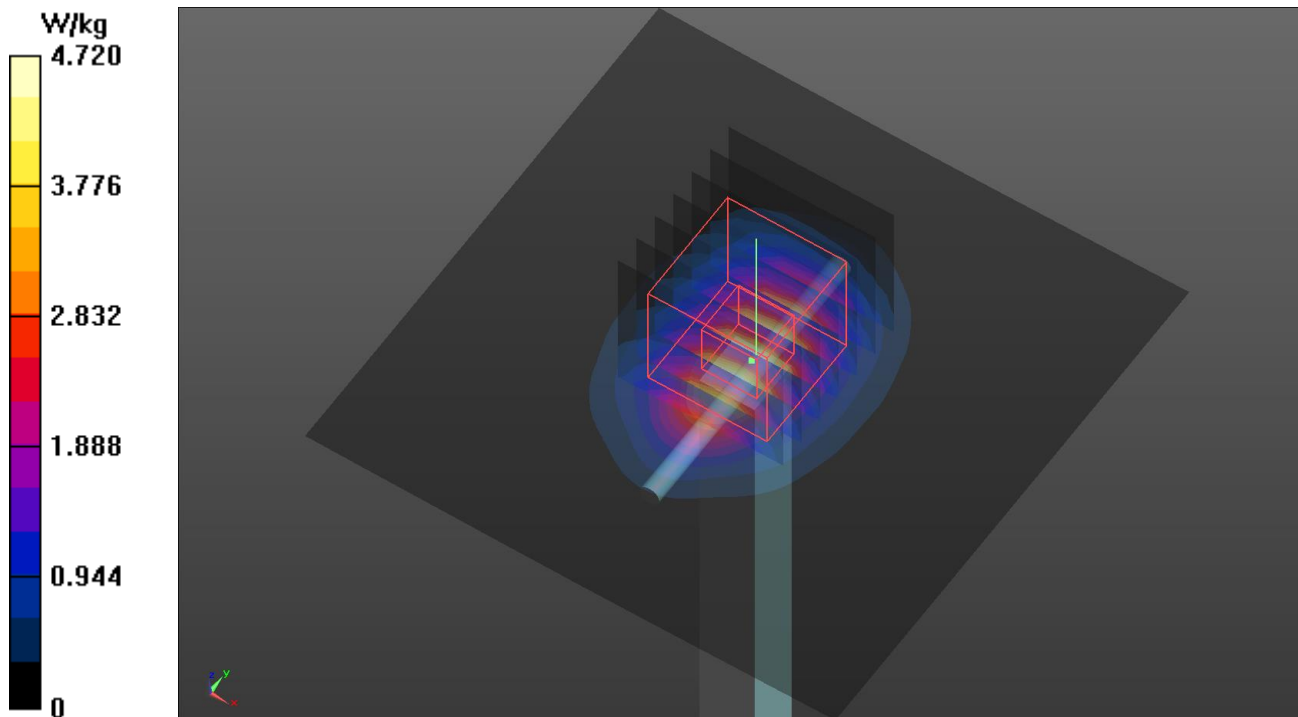

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/07/18

S02 System Check_H5250_220718

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0718 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.699$ S/m; $\epsilon_r = 36.155$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(5.28, 5.28, 5.28) @ 5250 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 9.28 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 49.12 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 4 W/kg; SAR(10 g) = 1.14 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.4%

Maximum value of SAR (measured) = 10.1 W/kg

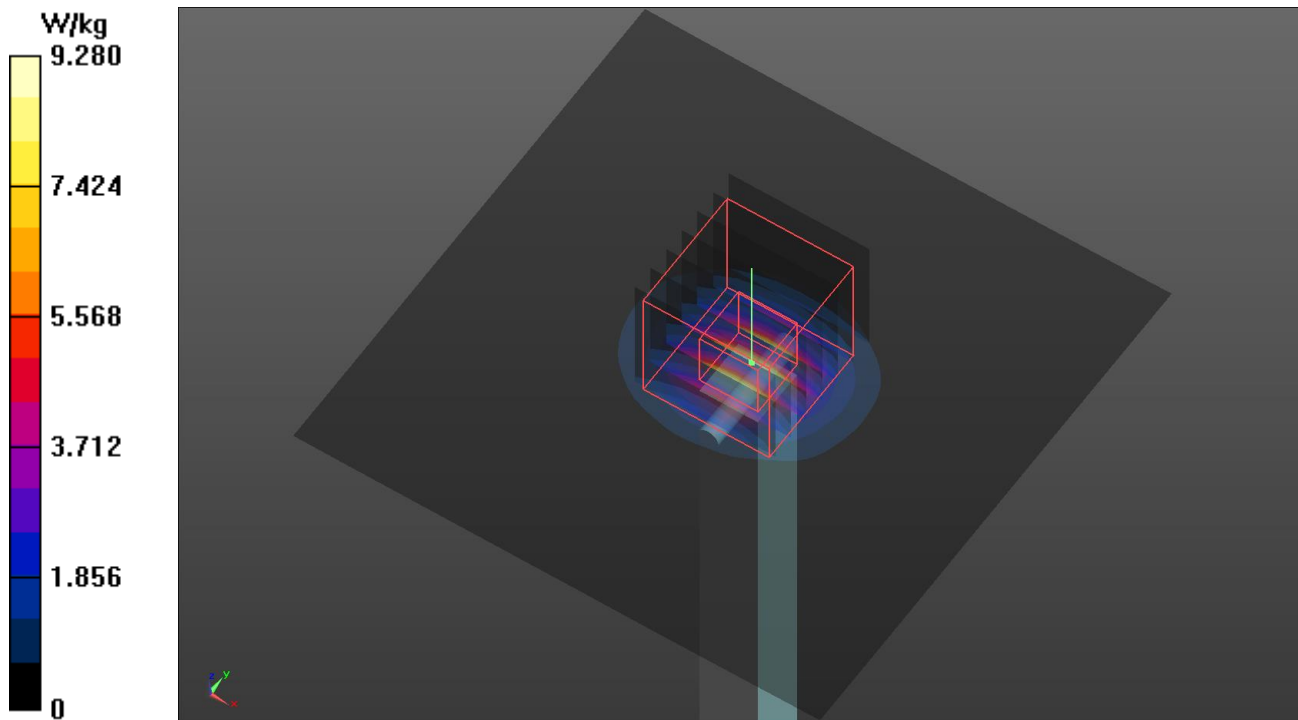

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/07/18

S03 System Check_H5600_220718

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0718 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.996$ S/m; $\epsilon_r = 35.797$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.78, 4.78, 4.78) @ 5600 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.2 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.87 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 4.2 W/kg; SAR(10 g) = 1.19 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 10.7 W/kg

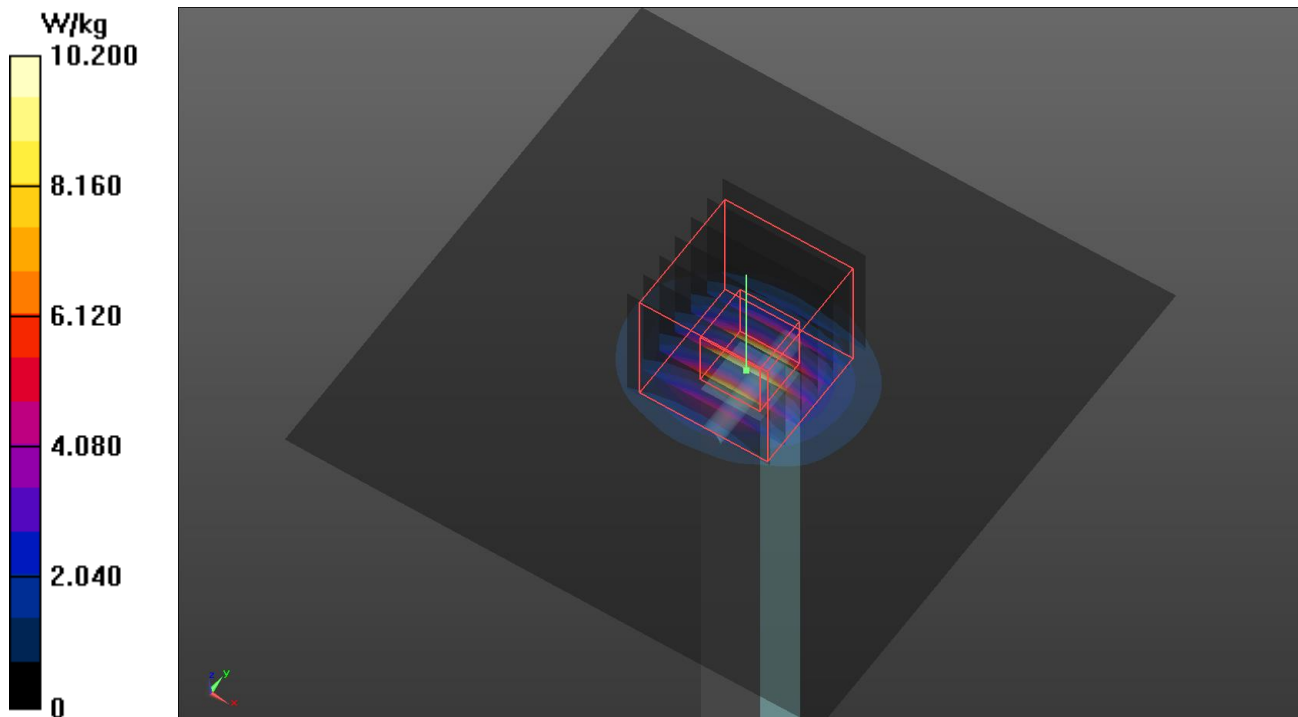

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/07/19

S04 System Check_H5750_220719

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0719 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.275$ S/m; $\epsilon_r = 34.361$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(5.06, 5.06, 5.06) @ 5750 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 10.5 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 50.32 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 19.8 W/kg

SAR(1 g) = 4.18 W/kg; SAR(10 g) = 1.18 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 11.3 W/kg

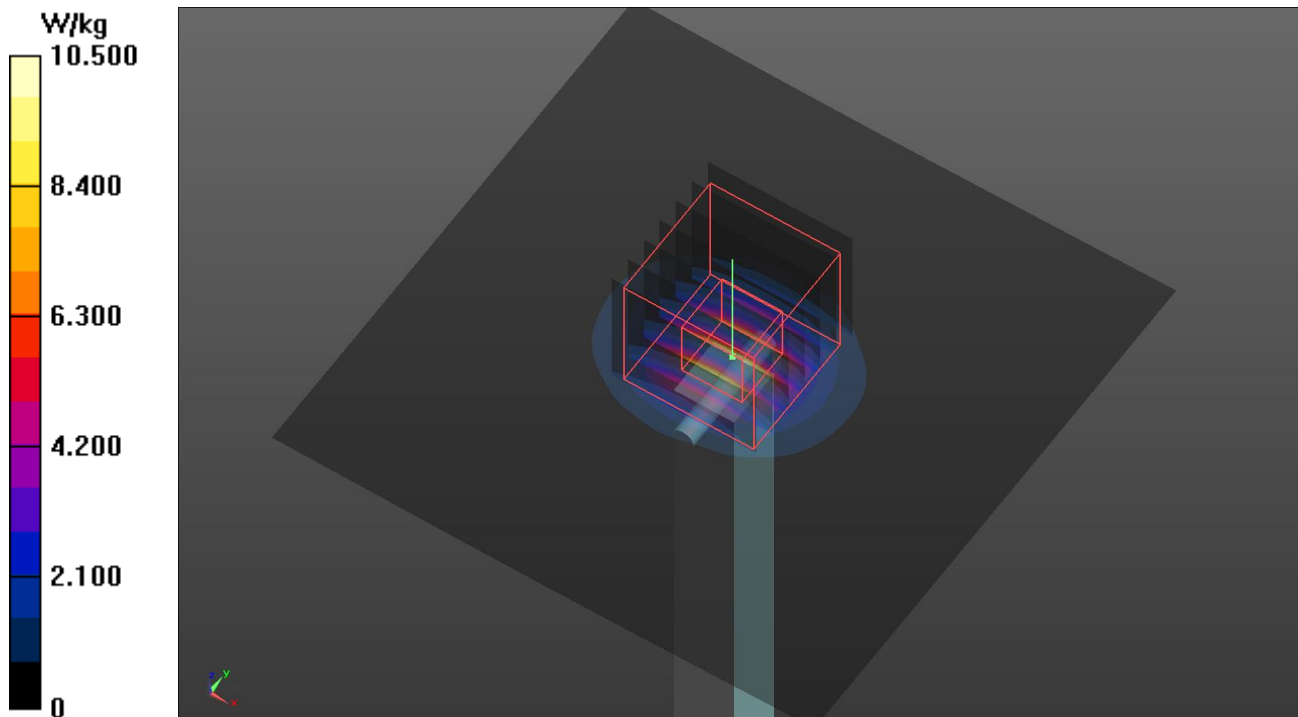

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/7/20

S05 System Check_H2450_220720

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0720 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.706$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7736; ConvF(8.12, 8.12, 8.12) @ 2450 MHz; Calibrated: 2022/5/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2022/6/1
- Phantom: ELI Phantom_1204; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.28 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 49.09 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 5.38 W/kg

SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.18 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.25 W/kg

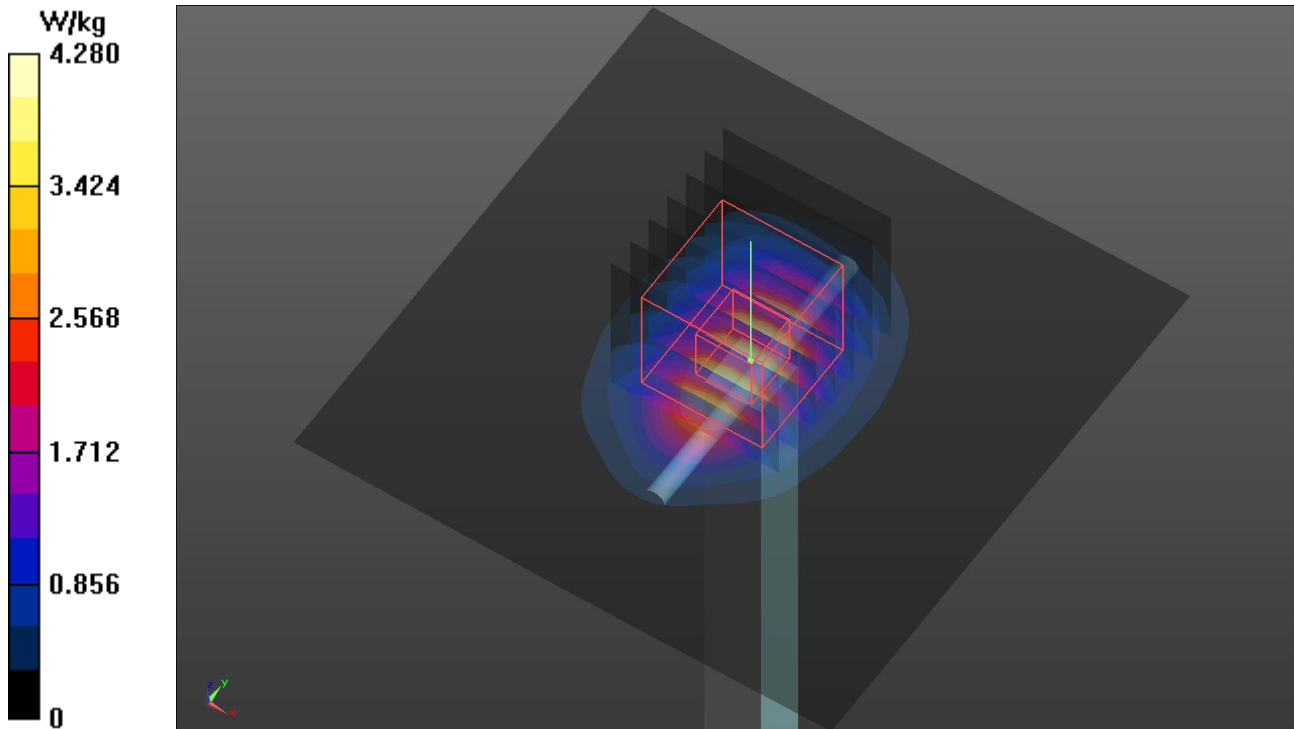

Plots of System Verification

Measurement Report S06 System Check_H6500_220720 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	50.0 x 10.0 x 8.0		6500

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		,	6500.0,	5.45	6.08	34.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1204	H50T72N1, 2022-Jul-20	EX3DV4 - SN7736, 2022-05-30	DAE3 Sn579, 2022-06-01

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-07-20	2022-07-20
psSAR1g [W/kg]	24.3	28.4
psSAR10g [W/kg]	4.79	5.20
psPDab (1.0cm2, sq) [W/m2]		284
psPDab (4.0cm2, sq) [W/m2]		127
Power Drift [dB]	0.00	-0.02
M2/M1 [%]		51.7
Dist 3dB Peak [mm]		4.6

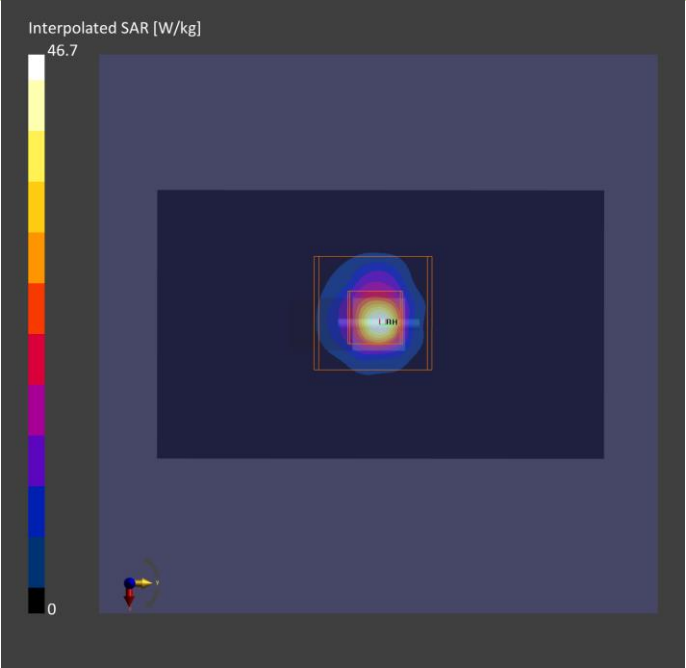

Plots of System Verification

Measurement Report S06 PD_System Check_10 GHz_2022.07.20 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
SPEAG, 5G Verification Source 10 GHz	100.0 x 100.0 x 170.0	SN: 1025	

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	FRONT, 5.55	Validation band	CW, 0--	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1035	Air---	EUmmWV3 - SN9361_F1-55GHz, 2021-08-25	DAE3 Sn579, 2022-06-01

Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	5.55

Measurement Results

	5G Scan
Date	2022-07-20
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	48.9
psPDtot+ [W/m ²]	49.0
psPDmod+ [W/m ²]	49.4
E _{max} [V/m]	143
Power Drift [dB]	0.06

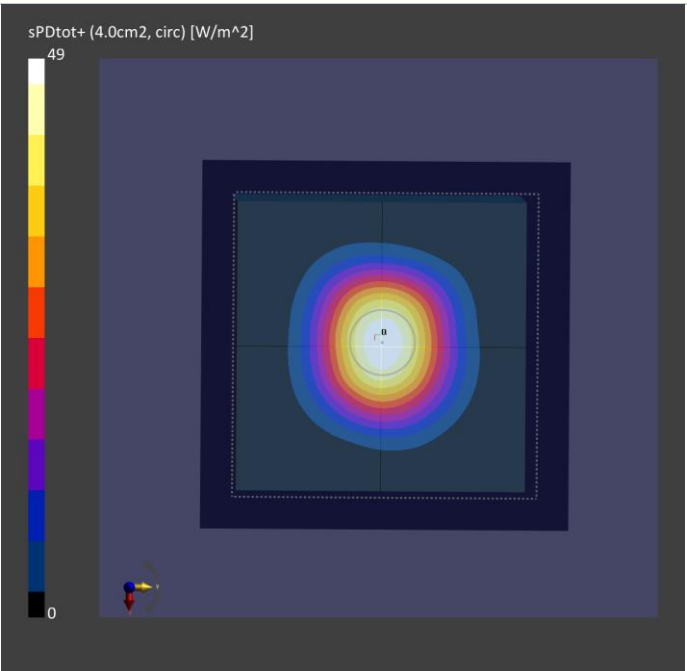

Annex B. Plots of Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination are shown as follows.

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/7/15

P01 WLAN2.4G_802.11b_Rear Face_0mm_Ch6_Ant Brand_South Star_Ant 0_Battery SKU 3

DUT: BFLF_WTW_P22061090

Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0715 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.744$ S/m; $\epsilon_r = 38.579$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.82, 7.82, 7.82) @ 2437 MHz; Calibrated: 2022/3/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/3/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x321x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 2.88 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 46.37 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.464 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 45.5%

Maximum value of SAR (measured) = 1.96 W/kg

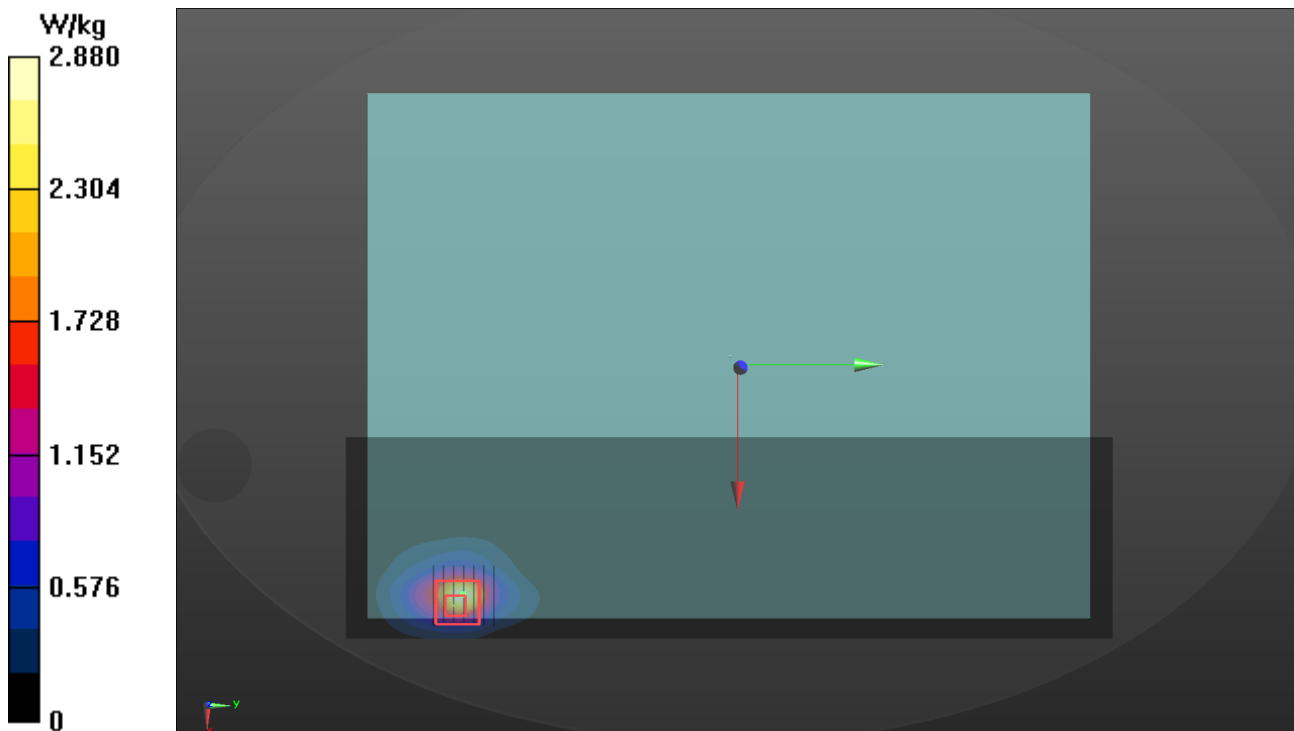

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/07/18

P02 WLAN5.3G_802.11ac VHT80_Top Side_0mm_Ch58_Ant Brand_South Star_Ant 0_Battery SKU 3

DUT: BFLF_WTW_P22061090

Communication System: UID 10544 - AAC, IEEE 802.11ac WiFi (80MHz, MCS0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0718 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.688$ S/m; $\epsilon_r = 35.913$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(5.28, 5.28, 5.28) @ 5290 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x401x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.98 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 19.47 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 4.58 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.261 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 66.2%

Maximum value of SAR (measured) = 2.90 W/kg

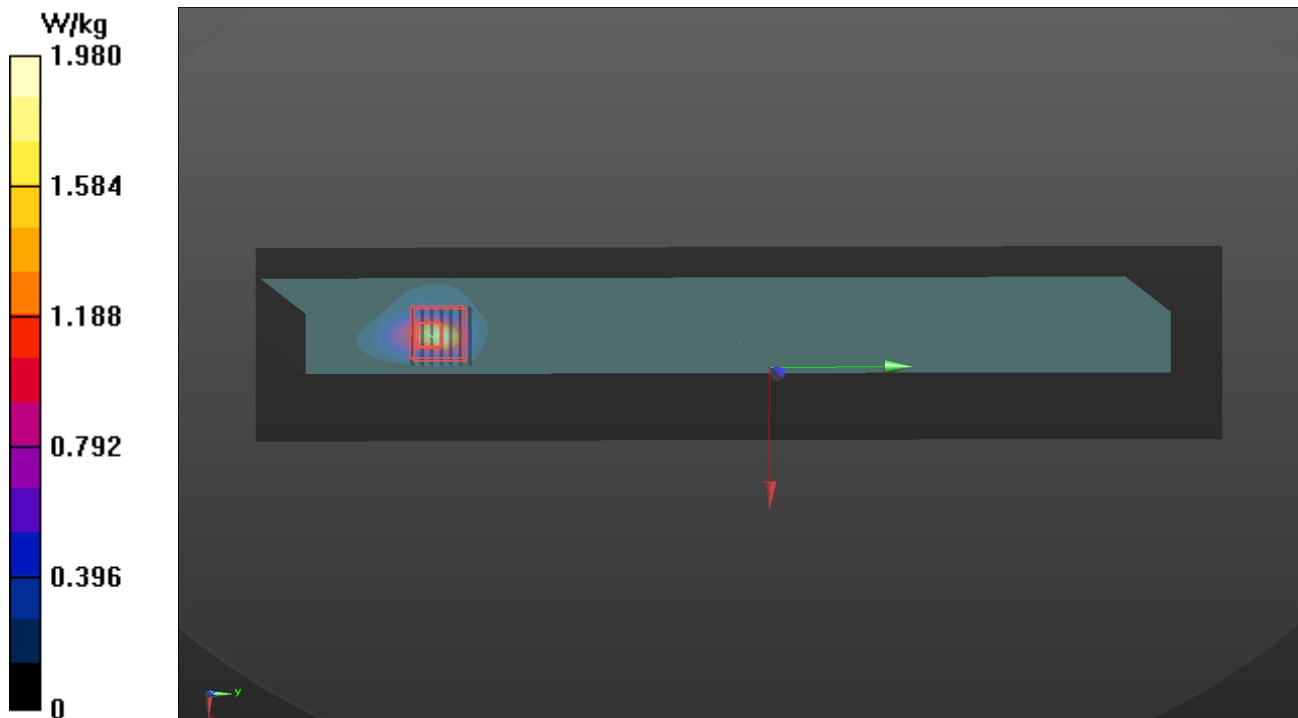

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/07/18

P03 WLAN5.6G_802.11ac VHT80_Top Side_0mm_Ch106_Ant Brand_South Star_Ant 0_Battery SKU 3

DUT: BFLF_WTW_P22061090

Communication System: UID 10544 - AAC, IEEE 802.11ac WiFi (80MHz, MCS0); Frequency: 5530 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0718 Medium parameters used: $f = 5530$ MHz; $\sigma = 4.967$ S/m; $\epsilon_r = 35.954$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.78, 4.78, 4.78) @ 5530 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x401x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.22 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.64 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 4.72 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.254 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 64%

Maximum value of SAR (measured) = 2.76 W/kg

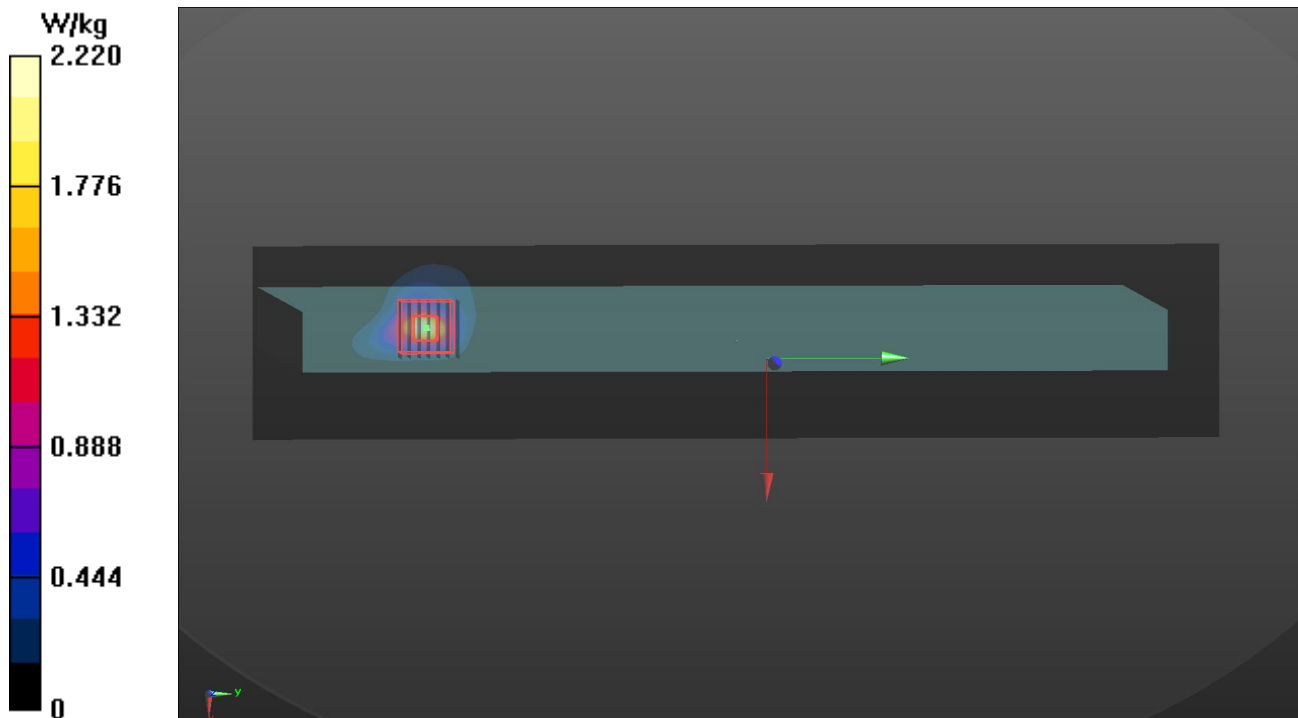

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/07/19

P04 WLAN5.8G_802.11ac VHT80_Top Side_0mm_Ch155_Ant Brand_South Star_Ant 0_Battery SKU 3

DUT: BFLF_WTW_P22061090

Communication System: UID 10544 - AAC, IEEE 802.11ac WiFi (80MHz, MCS0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0719 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.29$ S/m; $\epsilon_r = 34.289$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(5.06, 5.06, 5.06) @ 5775 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x401x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.55 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 14.11 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 4.96 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.244 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 61.7%

Maximum value of SAR (measured) = 2.72 W/kg

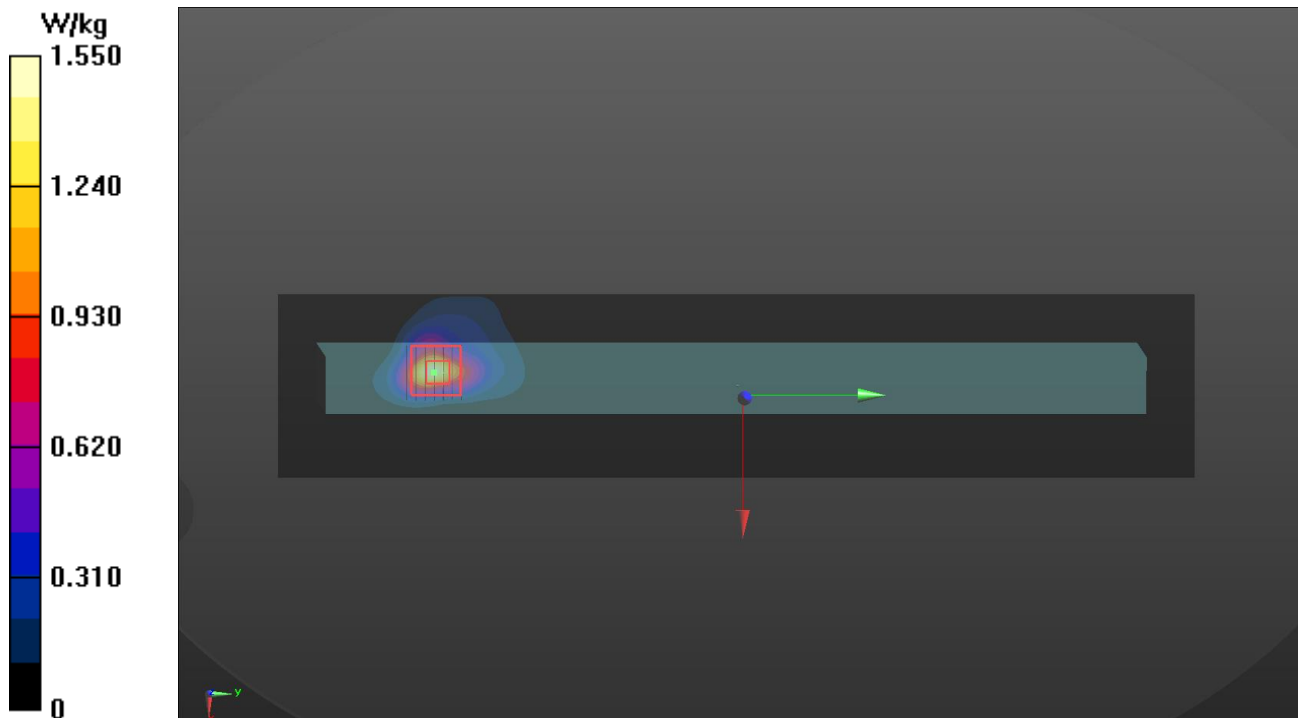

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/7/20

P05 BT_BDR_Rear Face_0mm_Ch0_Ant Brand_South Star_Ant 0_Battery SKU 3

DUT: BFLF_WTW_P22061090

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2402 MHz; Duty Cycle: 1:1.3

Medium: H19T27N1_0720 Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.821$ S/m; $\epsilon_r = 38.91$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7736; ConvF(8.12, 8.12, 8.12) @ 2402 MHz; Calibrated: 2022/5/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2022/6/1
- Phantom: ELI Phantom_1204; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x301x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.812 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 21.95 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.131 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 42.4%

Maximum value of SAR (measured) = 0.962 W/kg

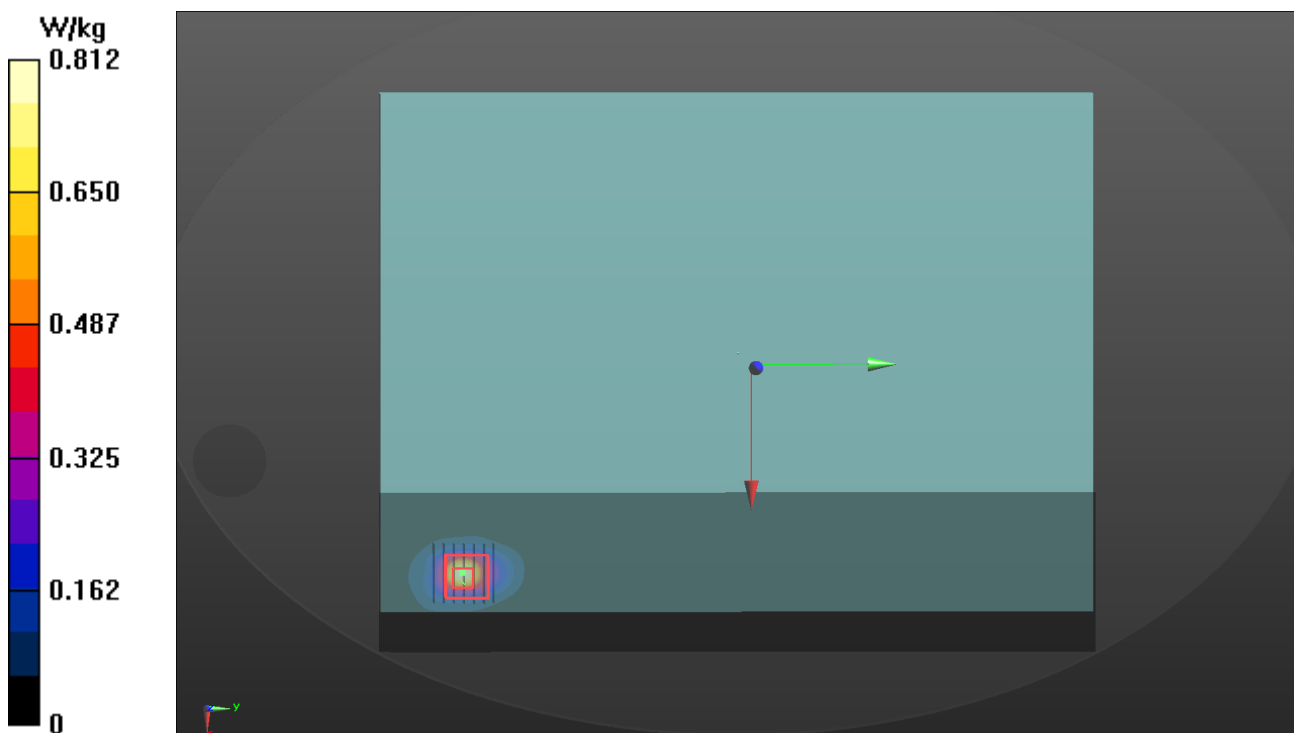

Plots of Measurement

Measurement Report

P06S UNII-5_802.11ax HE160_Rear Face_0mm_Ch47_Ant Brand South Star_Ant 1_Battery SKU 3

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BFLF-WTW-P22061090,	358.0 x 260.0 x 25.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Rear Face, 0.00	U-NII-5	WLAN, 10755-AAC	6185.0, 47	5.45	5.53	35.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1204	H50T72N1, 2022-Jul-20	EX3DV4 - SN7736, 2022-05-30	DAE3 Sn579, 2022-06-01

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-07-20	2022-07-20
psSAR1g [W/kg]	0.579	0.516
psSAR10g [W/kg]	0.176	0.176
psPDab (1.0cm2, sq) [W/m2]		6.16
psPDab (4.0cm2, sq) [W/m2]		4.09
Power Drift [dB]	0.16	-0.03
M2/M1 [%]		53.8
Dist 3dB Peak [mm]		5.4

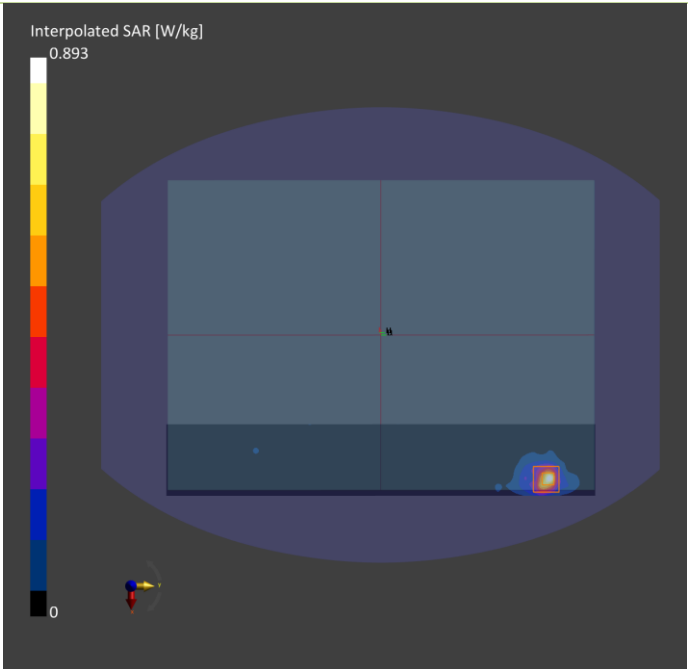

Plots of Measurement

Measurement Report

P06P UNII-5_802.11ax HE160_Rear Face_0mm_Ch47_South Star_Ant 1_Battery3

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BFLF-WTW-P22061090	358.0 x 260.0 x 22.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Rear Face, 0.00	U-NII-5	WLAN, 10755-AAC	6185.0, 47	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1035	Air---	EUmmWV3 - SN9361_F1-55GHz, 2021-08-25	DAE3 Sn579, 2022-06-01

Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Date	2022-07-20
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.32
psPDtot+ [W/m ²]	1.96
psPDmod+ [W/m ²]	2.31
E _{max} [V/m]	44.7
Power Drift [dB]	0.01

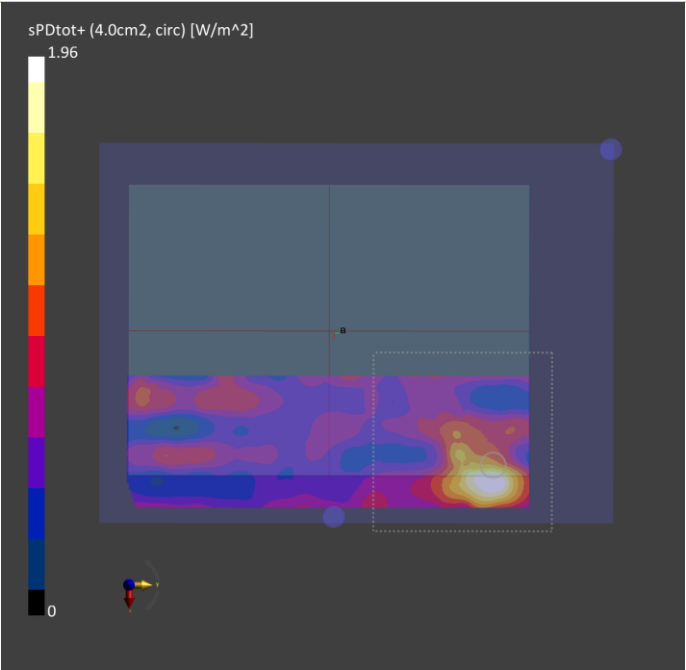

Annex C. Tissue & System Verification

The measuring results for tissue simulating liquid and system check are shown as below.

Note:

1. For Section 4.3, the dielectric properties of the tissue simulating liquid have been measured within 24 hours before the SAR testing and within $\pm 10\%$ of the target values. Liquid temperature during the SAR testing has kept within $\pm 2^\circ\text{C}$.
2. For Section 4.4, The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.
3. For Section 4.5, Comparing to the reference SAR value provided by SPEAG in dipole calibration certificate, the deviation of system check results is within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots please refer to Annex A of this report.

Tissue Verification									Validation for CW			Validation for Modulation				System Validation					Note			
Plot No.	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Targeted Conductivity (σ)	Targeted Permittivity (ε _r)	Deviation Conductivity (σ)	Deviation Permittivity (ε _r)	Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR	Date	Frequency (MHz)	Targeted 1g SAR (W/kg)	Measured 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N	Output Power (dB)
S01	2450	23.3	1.758	38.541	1.8	39.2	-2.33	-1.68	Pass	Pass	Pass	OFDM	N/A	Pass	Jul. 15, 2022	2450	52.60	2.82	56.27	6.97	737	3650	861	17
S02	5250	23.4	4.699	36.155	4.71	35.9	-0.23	0.71	Pass	Pass	Pass	OFDM	N/A	Pass	Jul. 18, 2022	5250	80.60	4	79.81	-0.98	1019	3650	861	17
S03	5600	23.4	4.996	35.797	5.07	35.5	-1.46	0.84	Pass	Pass	Pass	OFDM	N/A	Pass	Jul. 18, 2022	5600	82.40	4.2	83.80	1.70	1019	3650	861	17
S04	5750	23.2	5.275	34.361	5.22	35.4	1.05	-2.94	Pass	Pass	Pass	OFDM	N/A	Pass	Jul. 19, 2022	5750	79.40	4.18	83.40	5.04	1019	3650	861	17
S05	2450	23.3	1.875	38.706	1.8	39.2	4.17	-1.26	Pass	Pass	Pass	OFDM	N/A	Pass	Jul. 20, 2022	2450	52.60	2.48	49.48	-5.93	737	7736	579	17
S06S	6500	23.3	6.08	34.6	6.07	34.5	0.16	0.29	Pass	Pass	Pass	OFDM	N/A	Pass	Jul. 20, 2022	6500	289.00	28.4	284.00	-1.73	1008	7736	579	20

Plot No.	Test Date	Frequency [GHz]	mmWave Probe S/N	Verification Source S/N	Averaging Area [cm ²]	Distance [mm]	Target Power Density [W/m ²]	Measured Power Density [W/m ²]	Deviation [%]	Averaging
S06P	Jul. 20, 2022	10	9361	1025	4	10.0	51.3	48.9	-4.68%	Circular

Annex D. Maximum Target Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

WLAN Tune-up Power (Tablet)				
WLAN 2.4GHz				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11b	1	2412	18.00	12.50
	6	2437	18.00	12.50
	11	2462	17.50	12.50
	12	2467	15.00	12.50
	13	2472	13.50	12.50
802.11g	1	2412	18.00	12.50
	6	2437	18.00	12.50
	11	2462	18.00	12.50
	12	2467	14.50	12.50
	13	2472	11.50	11.50
802.11n HT20	1	2412	17.50	12.50
	6	2437	18.00	12.50
	11	2462	17.00	12.50
	12	2467	14.00	12.50
	13	2472	9.50	9.50
802.11n HT40	3	2422	15.00	12.50
	6	2437	18.00	12.50
	9	2452	15.00	12.50
	10	2457	12.00	12.00
	11	2462	10.00	10.00
802.11ax HE20	1	2412	17.50	12.50
	6	2437	18.00	12.50
	11	2462	17.50	12.50
	12	2467	14.00	12.50
	13	2472	10.00	10.00
802.11ax HE40	3	2422	15.00	12.50
	6	2437	18.00	12.50
	9	2452	15.00	12.50
	10	2457	12.50	12.50
	11	2462	10.00	12.50

WLAN Tune-up Power (Tablet)				
Bluetooth				
Mode	Channel	Frequency	Ant 0 Max Tune-up	
BR / EDR	0	2402	11.5	
	39	2441	11.5	
	78	2480	11.5	
LE	0	2402	11.5	
	19	2440	11.5	
	39	2480	11.5	

WLAN Tune-up Power (Tablet)				
WLAN 5.2GHz				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11a	36	5180	14.0	10.0
	40	5200	14.0	10.0
	44	5220	14.0	10.0
	48	5240	14.0	10.0
802.11n HT20	36	5180	14.0	10.0
	40	5200	14.0	10.0
	44	5220	14.0	10.0
	48	5240	14.0	10.0
802.11n HT40	38	5190	14.0	10.0
	46	5230	14.0	10.0
802.11ac VHT80	42	5210	14.0	10.0
802.11ax HE20	36	5180	14.0	10.0
	40	5200	14.0	10.0
	44	5220	14.0	10.0
	48	5240	14.0	10.0
802.11ax HE40	38	5190	14.0	10.0
	46	5230	14.0	10.0
802.11ax HE80	42	5210	14.0	10.0

WLAN Tune-up Power (Tablet)				
WLAN 5.3GHz				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11a	52	5260	14.0	10.0
	56	5280	14.0	10.0
	60	5300	14.0	10.0
	64	5320	14.0	10.0
802.11n HT20	52	5260	14.0	10.0
	56	5280	14.0	10.0
	60	5300	14.0	10.0
	64	5320	14.0	10.0
802.11n HT40	54	5270	14.0	10.0
	62	5310	14.0	10.0
802.11ac VHT80	58	5290	14.0	10.0
802.11ac VHT160	50	5250	13.5	10.0
802.11ax HE20	52	5260	14.0	10.0
	56	5280	14.0	10.0
	60	5300	14.0	10.0
	64	5320	14.0	10.0
802.11ax HE40	54	5270	14.0	10.0
	62	5310	14.0	10.0
802.11ax HE80	58	5290	14.0	10.0
802.11ax HE160	50	5250	13.5	10.0

WLAN Tune-up Power (Tablet)				
WLAN 5.6GHz				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11a	100	5500	14.50	10.00
	116	5580	14.50	10.00
	120	5600	14.50	10.00
	124	5620	14.50	10.00
	132	5660	14.50	10.00
	140	5700	14.50	10.00
	144	5720	14.50	10.00
802.11n HT20	100	5500	14.50	10.00
	116	5580	14.50	10.00
	120	5600	14.50	10.00
	124	5620	14.50	10.00
	132	5660	14.50	10.00
	140	5700	14.50	10.00
	144	5720	14.50	10.00
802.11n HT40	102	5510	14.50	10.00
	110	5550	14.50	10.00
	118	5590	14.50	10.00
	126	5630	14.50	10.00
	134	5670	14.50	10.00
	142	5710	14.50	10.00
802.11ac VHT80	106	5530	14.50	10.00
	122	5610	14.50	10.00
	138	5690	14.50	10.00
802.11ac VHT160	114	5570	12.50	10.00
802.11ax HE20	100	5500	14.50	10.00
	116	5580	14.50	10.00
	120	5600	14.50	10.00
	124	5620	14.50	10.00
	132	5660	14.50	10.00
	140	5700	14.50	10.00
	144	5720	14.50	10.00
802.11ax HE40	102	5510	14.50	10.00
	110	5550	14.50	10.00
	118	5590	14.50	10.00
	126	5630	14.50	10.00
	134	5670	14.50	10.00
	142	5710	14.50	10.00
802.11ax HE80	106	5530	14.50	10.00
	122	5610	14.50	10.00
	138	5690	14.50	10.00
802.11ax HE160	114	5570	12.50	12.50

WLAN Tune-up Power (Tablet)				
WLAN 5.8GHz				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11a	149	5745	14.0	10.0
	153	5765	14.0	10.0
	157	5785	14.0	10.0
	161	5805	14.0	10.0
	165	5825	14.0	10.0
802.11n HT20	149	5745	14.0	10.0
	153	5765	14.0	10.0
	157	5785	14.0	10.0
	161	5805	14.0	10.0
	165	5825	14.0	10.0
802.11n HT40	151	5755	14.0	10.0
	159	5795	14.0	10.0
802.11ac VHT80	155	5775	14.0	10.0
802.11ax HE20	149	5745	14.0	10.0
	153	5765	14.0	10.0
	157	5785	14.0	10.0
	161	5805	14.0	10.0
	165	5825	14.0	10.0
802.11ax HE40	151	5755	14.0	10.0
	159	5795	14.0	10.0
802.11ax HE80	155	5775	14.0	10.0

WLAN Tune-up Power (Laptop)				
WLAN 2.4GHz				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11b	1	2412	15.5	18.0
	6	2437	15.5	18.0
	11	2462	15.5	17.5
	12	2467	15.0	15.0
	13	2472	13.5	13.5
802.11g	1	2412	15.5	18.0
	6	2437	15.5	18.0
	11	2462	15.5	18.0
	12	2467	14.5	14.5
	13	2472	11.5	11.5
802.11n HT20	1	2412	15.5	17.5
	6	2437	15.5	18.0
	11	2462	15.5	18.0
	12	2467	14.0	14.0
	13	2472	9.5	11.5
802.11n HT40	3	2422	15.0	15.0
	6	2437	15.5	18.0
	9	2452	15.0	15.0
	10	2457	12.0	12.0
	11	2462	10.0	10.0
802.11ax HE20	1	2412	15.5	17.5
	6	2437	15.5	18.0
	11	2462	15.5	17.5
	12	2467	14.0	14.0
	13	2472	10.0	10.0
802.11ax HE40	3	2422	15.0	15.0
	6	2437	15.5	18.0
	9	2452	15.0	15.0
	10	2457	12.5	12.5
	11	2462	10.0	10.0

WLAN Tune-up Power (Laptop)				
Bluetooth				
Mode	Channel	Frequency	Ant 0 Max Tune-up	
BR / EDR	0	2402	11.5	
	39	2441	11.5	
	78	2480	11.5	
LE	0	2402	11.5	
	19	2440	11.5	
	39	2480	11.5	

WLAN Tune-up Power (Laptop)				
WLAN 5.2GHz				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11a	36	5180	8.5	9.5
	40	5200	8.5	9.5
	44	5220	8.5	9.5
	48	5240	8.5	9.5
802.11n HT20	36	5180	8.5	9.5
	40	5200	8.5	9.5
	44	5220	8.5	9.5
	48	5240	8.5	9.5
802.11n HT40	38	5190	8.5	9.5
	46	5230	8.5	9.5
802.11ac VHT80	42	5210	8.5	9.5
802.11ax HE20	36	5180	8.5	9.5
	40	5200	8.5	9.5
	44	5220	8.5	9.5
	48	5240	8.5	9.5
802.11ax HE40	38	5190	8.5	9.5
	46	5230	8.5	9.5
802.11ax HE80	42	5210	8.5	9.5

WLAN Tune-up Power (Laptop)				
WLAN 5.3GHz				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11a	52	5260	8.5	9.5
	56	5280	8.5	9.5
	60	5300	8.5	9.5
	64	5320	8.5	9.5
802.11n HT20	52	5260	8.5	9.5
	56	5280	8.5	9.5
	60	5300	8.5	9.5
	64	5320	8.5	9.5
802.11n HT40	54	5270	8.5	9.5
	62	5310	8.5	9.5
802.11ac VHT80	58	5290	8.5	9.5
802.11ac VHT160	50	5250	8.5	9.5
802.11ax HE20	52	5260	8.5	9.5
	56	5280	8.5	9.5
	60	5300	8.5	9.5
	64	5320	8.5	9.5
802.11ax HE40	54	5270	8.5	9.5
	62	5310	8.5	9.5
802.11ax HE80	58	5290	8.5	9.5
802.11ax HE160	50	5250	8.5	9.5

WLAN Tune-up Power (Laptop)				
WLAN 5.6GHz				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11a	100	5500	10.50	12.50
	116	5580	10.50	12.50
	120	5600	10.50	12.50
	124	5620	10.50	12.50
	132	5660	10.50	12.50
	140	5700	10.50	12.50
	144	5720	10.50	12.50
802.11n HT20	100	5500	10.50	12.50
	116	5580	10.50	12.50
	120	5600	10.50	12.50
	124	5620	10.50	12.50
	132	5660	10.50	12.50
	140	5700	10.50	12.50
	144	5720	10.50	12.50
802.11n HT40	102	5510	10.50	12.50
	110	5550	10.50	12.50
	118	5590	10.50	12.50
	126	5630	10.50	12.50
	134	5670	10.50	12.50
	142	5710	10.50	12.50
802.11ac VHT80	106	5530	10.50	12.50
	122	5610	10.50	12.50
	138	5690	10.50	12.50
802.11ac VHT160	114	5570	10.50	12.50
802.11ax HE20	100	5500	10.50	12.50
	116	5580	10.50	12.50
	120	5600	10.50	12.50
	124	5620	10.50	12.50
	132	5660	10.50	12.50
	140	5700	10.50	12.50
	144	5720	10.50	12.50
802.11ax HE40	102	5510	10.50	12.50
	110	5550	10.50	12.50
	118	5590	10.50	12.50
	126	5630	10.50	12.50
	134	5670	10.50	12.50
	142	5710	10.50	12.50
802.11ax HE80	106	5530	10.50	12.50
	122	5610	10.50	12.50
	138	5690	10.50	12.50
802.11ax HE160	114	5570	10.50	12.50

WLAN Tune-up Power (Laptop)				
WLAN 5.8GHz				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11a	149	5745	10.50	12.50
	153	5765	10.50	12.50
	157	5785	10.50	12.50
	161	5805	10.50	12.50
	165	5825	10.50	12.50
802.11n HT20	149	5745	10.50	12.50
	153	5765	10.50	12.50
	157	5785	10.50	12.50
	161	5805	10.50	12.50
	165	5825	10.50	12.50
802.11n HT40	151	5755	10.50	12.50
	159	5795	10.50	12.50
802.11ac VHT80	155	5775	10.50	12.50
802.11ax HE20	149	5745	10.50	12.50
	153	5765	10.50	12.50
	157	5785	10.50	12.50
	161	5805	10.50	12.50
	165	5825	10.50	12.50
802.11ax HE40	151	5755	10.50	12.50
	159	5795	10.50	12.50
802.11ax HE80	155	5775	10.50	12.50

WLAN Tune-up Power (Laptop)				
UNII-5				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11ax HE20	1	5955	1.0	1.0
	5	5975	1.0	1.0
	9	5995	1.0	1.0
	13	6015	1.0	1.0
	17	6035	1.0	1.0
	21	6055	1.0	1.0
	25	6075	1.0	1.0
	29	6095	1.0	1.0
	33	6115	1.0	1.0
	37	6135	1.0	1.0
	41	6155	1.0	1.0
	45	6175	1.0	1.0
	49	6195	1.0	1.0
	53	6215	1.0	1.0
	57	6235	1.0	1.0
	61	6255	1.0	1.0
	65	6275	1.0	1.0
	69	6295	1.0	1.0
	73	6315	1.0	1.0
	77	6335	1.0	1.0
802.11ax HE40	81	6355	1.0	1.0
	85	6375	1.0	1.0
	89	6395	1.0	1.0
	93	6415	1.0	1.0
	3	5965	3.5	3.5
	11	6005	3.5	3.5
	19	6045	3.5	3.5
	27	6085	3.5	3.5
	35	6125	3.5	3.5
	43	6165	3.5	3.5
	51	6205	3.5	3.5
	59	6245	3.5	3.5
802.11ax HE80	67	6285	3.5	3.5
	75	6325	3.5	3.5
	83	6365	3.5	3.5
	91	6405	3.5	3.5
	7	5985	7.0	7.0
	23	6065	7.0	7.0
	39	6145	7.0	7.0
	55	6225	7.0	7.0
	71	6305	7.0	7.0
	87	6385	7.0	7.0

WLAN Tune-up Power (Laptop)				
802.11ax HE160	15	6025	9.0	9.0
	47	6185	9.0	9.0
	79	6345	9.5	9.5

WLAN Tune-up Power (Laptop)				
UNII-6				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11ax HE20	97	6435	1.5	1.5
	101	6455	1.5	1.5
	105	6475	1.5	1.5
	109	6495	1.5	1.5
	113	6515	1.5	1.5
	117	6535	1.5	1.5
802.11ax HE40	99	6445	4.0	4.0
	107	6485	4.0	4.0
	115	6525	4.0	4.0
802.11ax HE80	103	6465	7.0	7.0
	119	6545	7.0	7.0
802.11ax HE160	111	6505	9.5	9.5

WLAN Tune-up Power (Laptop)				
UNII-7				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11ax HE20	121	6555	1.5	1.5
	125	6575	1.5	1.5
	129	6595	1.5	1.5
	133	6615	1.5	1.5
	137	6635	1.5	1.5
	141	6655	1.5	1.5
	145	6675	1.5	1.5
	149	6695	1.5	1.5
	153	6715	1.5	1.5
	157	6735	1.5	1.5
	161	6755	1.5	1.5
	165	6775	1.5	1.5
	169	6795	1.5	1.5
	173	6815	1.5	1.5
	177	6835	1.5	1.5
	181	6855	1.5	1.5
	185	6875	2.0	2.0
802.11ax HE40	123	6565	4.0	4.0
	131	6605	4.0	4.0
	139	6645	4.0	4.0
	147	6685	4.0	4.0
	155	6725	4.0	4.0
	163	6765	4.0	4.0
	171	6805	4.0	4.0
	179	6845	4.0	4.0
	187	6885	4.5	4.5
802.11ax HE80	135	6625	7.0	7.0
	151	6705	7.0	7.0
	167	6785	7.0	7.0
	183	6865	7.0	7.0
802.11ax HE160	143	6665	9.0	9.0
	175	6825	9.0	9.0

WLAN Tune-up Power (Laptop)				
UNII-8				
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up
802.11ax HE20	189	6895	2.0	2.0
	193	6915	2.0	2.0
	197	6935	2.0	2.0
	201	6955	2.0	2.0
	205	6975	2.0	2.0
	209	6995	2.0	2.0
	213	7015	2.0	2.0
	217	7035	2.0	2.0
	221	7055	2.0	2.0
	225	7075	2.0	2.0
	229	7095	2.0	2.0
	233	7115	2.0	2.0
802.11ax HE40	195	6925	4.5	4.5
	203	6965	4.5	4.5
	211	7005	4.5	4.5
	219	7045	4.5	4.5
	227	7085	4.5	4.5
802.11ax HE80	199	6945	7.5	7.5
	215	7025	7.5	7.5
802.11ax HE160	207	6985	9.5	9.5

Annex E. Measured Conducted Power Result

The measuring conducted power (Unit: dBm) are shown as below.

WLAN Conducted Power (Tablet)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	17.81
	6	2437	17.83
	11	2462	17.49
	12	2467	14.88
	13	2472	13.27
802.11g	1	2412	17.61
	6	2437	17.72
	11	2462	17.73
	12	2467	14.08
	13	2472	11.07
802.11n HT20	1	2412	17.15
	6	2437	17.64
	11	2462	16.53
	12	2467	13.56
	13	2472	9.07
802.11n HT40	3	2422	14.68
	6	2437	17.71
	9	2452	14.56
	10	2457	11.74
	11	2462	9.68
802.11ax HE20	1	2412	17.23
	6	2437	17.75
	11	2462	17.22
	12	2467	13.56
	13	2472	9.68
802.11ax HE40	3	2422	14.54
	6	2437	17.72
	9	2452	14.68
	10	2457	12.15
	11	2462	9.78

WLAN Conducted Power (Tablet)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	12.48
	6	2437	12.49
	11	2462	12.44
	12	2467	12.29
	13	2472	12.42
802.11g	1	2412	11.96
	6	2437	12.21
	11	2462	12.2
	12	2467	12.12
	13	2472	11.24
802.11n HT20	1	2412	11.96
	6	2437	11.91
	11	2462	11.95
	12	2467	11.97
	13	2472	8.9
802.11n HT40	3	2422	11.91
	6	2437	12.18
	9	2452	12.16
	10	2457	11.73
	11	2462	9.45
802.11ax HE20	1	2412	12.08
	6	2437	12.09
	11	2462	12.23
	12	2467	12.26
	13	2472	9.5
802.11ax HE40	3	2422	11.97
	6	2437	11.93
	9	2452	12.19
	10	2457	12.16
	11	2462	12.05

WLAN Conducted Power (Tablet)			
Bluetooth Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
BR / EDR	0	2402	11.44
	39	2441	11.18
	78	2480	11.13
LE	0	2402	9.55
	19	2440	9.53
	39	2480	9.52

WLAN Conducted Power (Tablet)			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	13.56
	40	5200	13.55
	44	5220	13.5
	48	5240	13.52
802.11n HT20	36	5180	13.56
	40	5200	13.62
	44	5220	13.5
	48	5240	13.7
802.11n HT40	38	5190	13.59
	46	5230	13.73
802.11ac VHT80	42	5210	13.99
802.11ax HE20	36	5180	13.51
	40	5200	13.66
	44	5220	13.61
	48	5240	13.51
802.11ax HE40	38	5190	13.57
	46	5230	13.72
802.11ax HE80	42	5210	13.51

WLAN Conducted Power (Tablet)			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	9.76
	40	5200	9.46
	44	5220	9.6
	48	5240	9.77
802.11n HT20	36	5180	9.49
	40	5200	9.51
	44	5220	9.49
	48	5240	9.59
802.11n HT40	38	5190	9.54
	46	5230	9.69
802.11ac VHT80	42	5210	9.89
802.11ax HE20	36	5180	9.61
	40	5200	9.43
	44	5220	9.7
	48	5240	9.62
802.11ax HE40	38	5190	9.54
	46	5230	9.66
802.11ax HE80	42	5210	9.61

WLAN Conducted Power (Tablet)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	13.51
	56	5280	13.56
	60	5300	13.63
	64	5320	13.7
802.11n HT20	52	5260	13.52
	56	5280	13.7
	60	5300	13.61
	64	5320	13.58
802.11n HT40	54	5270	13.59
	62	5310	13.69
802.11ac VHT80	58	5290	13.97
802.11ac VHT160	50	5250	13.17
802.11ax HE20	52	5260	13.51
	56	5280	13.75
	60	5300	13.62
	64	5320	13.52
802.11ax HE40	54	5270	13.69
	62	5310	13.57
802.11ax HE80	58	5290	13.67
802.11ax HE160	50	5250	13.02

WLAN Conducted Power (Tablet)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	9.51
	56	5280	9.71
	60	5300	9.46
	64	5320	9.44
802.11n HT20	52	5260	9.6
	56	5280	9.72
	60	5300	9.41
	64	5320	9.71
802.11n HT40	54	5270	9.44
	62	5310	9.42
802.11ac VHT80	58	5290	9.5
802.11ac VHT160	50	5250	9.86
802.11ax HE20	52	5260	9.58
	56	5280	9.75
	60	5300	9.56
	64	5320	9.7
802.11ax HE40	54	5270	9.77
	62	5310	9.4
802.11ax HE80	58	5290	9.54
802.11ax HE160	50	5250	9.58

WLAN Conducted Power (Tablet)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	14.18
	116	5580	14.19
	120	5600	14.04
	124	5620	14.25
	132	5660	14.12
	140	5700	14.15
	144	5720	14.23
802.11n HT20	100	5500	14.21
	116	5580	14.14
	120	5600	14.03
	124	5620	14.02
	132	5660	14.01
	140	5700	14.2
	144	5720	14.23
802.11n HT40	102	5510	14.18
	110	5550	14.01
	118	5590	14.11
	126	5630	14.12
	134	5670	14.12
	142	5710	14
802.11ac VHT80	106	5530	14.45
	122	5610	14.35
	138	5690	14.43
802.11ac VHT160	114	5570	12.01
802.11ax HE20	100	5500	14.22
	116	5580	14.07
	120	5600	14.2
	124	5620	14.02
	132	5660	14.14
	140	5700	14.09
	144	5720	14.03
802.11ax HE40	102	5510	14.03
	110	5550	14.09
	118	5590	14.05
	126	5630	14.22
	134	5670	14.06
	142	5710	14.05
802.11ax HE80	106	5530	14.02
	122	5610	14
	138	5690	14.21
802.11ax HE160	114	5570	12.16

WLAN Conducted Power (Tablet)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	9.81
	116	5580	9.75
	120	5600	9.79
	124	5620	9.63
	132	5660	9.61
	140	5700	9.61
	144	5720	9.61
802.11n HT20	100	5500	9.6
	116	5580	9.69
	120	5600	9.76
	124	5620	9.8
	132	5660	9.82
	140	5700	9.74
	144	5720	9.85
802.11n HT40	102	5510	9.82
	110	5550	9.85
	118	5590	9.73
	126	5630	9.8
	134	5670	9.82
	142	5710	9.79
802.11ac VHT80	106	5530	9.99
	122	5610	9.87
	138	5690	9.73
802.11ac VHT160	114	5570	9.79
802.11ax HE20	100	5500	9.82
	116	5580	9.8
	120	5600	9.76
	124	5620	9.7
	132	5660	9.78
	140	5700	9.71
	144	5720	9.68
802.11ax HE40	102	5510	9.74
	110	5550	9.63
	118	5590	9.77
	126	5630	9.83
	134	5670	9.75
	142	5710	9.66
802.11ax HE80	106	5530	9.7
	122	5610	9.81
	138	5690	9.61
802.11ax HE160	114	5570	12.46

WLAN Conducted Power (Tablet)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	13.72
	153	5765	13.56
	157	5785	13.71
	161	5805	13.74
	165	5825	13.57
802.11n HT20	149	5745	13.72
	153	5765	13.63
	157	5785	13.58
	161	5805	13.68
	165	5825	13.57
802.11n HT40	151	5755	13.54
	159	5795	13.71
802.11ac VHT80	155	5775	13.87
802.11ax HE20	149	5745	13.66
	153	5765	13.69
	157	5785	13.7
	161	5805	13.6
	165	5825	13.65
802.11ax HE40	151	5755	13.58
	159	5795	13.75
802.11ax HE80	155	5775	13.59

WLAN Conducted Power (Tablet)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	9.73
	153	5765	9.68
	157	5785	9.62
	161	5805	9.7
	165	5825	9.85
802.11n HT20	149	5745	9.67
	153	5765	9.65
	157	5785	9.78
	161	5805	9.73
	165	5825	9.76
802.11n HT40	151	5755	9.84
	159	5795	9.62
802.11ac VHT80	155	5775	9.98
802.11ax HE20	149	5745	9.83
	153	5765	9.63
	157	5785	9.75
	161	5805	9.67
	165	5825	9.8
802.11ax HE40	151	5755	9.7
	159	5795	9.74
802.11ax HE80	155	5775	9.78

WLAN Conducted Power (Laptop)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	15.34
	6	2437	15.41
	11	2462	15.16
	12	2467	14.88
	13	2472	13.27
802.11g	1	2412	15.29
	6	2437	15.02
	11	2462	15.34
	12	2467	14.29
	13	2472	11.39
802.11n HT20	1	2412	15.28
	6	2437	15.22
	11	2462	15.4
	12	2467	13.6
	13	2472	9.29
802.11n HT40	3	2422	14.82
	6	2437	15.12
	9	2452	14.9
	10	2457	11.59
	11	2462	9.63
802.11ax HE20	1	2412	15.2
	6	2437	15.28
	11	2462	15.06
	12	2467	13.84
	13	2472	9.68
802.11ax HE40	3	2422	14.9
	6	2437	15.38
	9	2452	14.77
	10	2457	12.31
	11	2462	9.86

WLAN Conducted Power (Laptop)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	17.94
	6	2437	17.99
	11	2462	17.39
	12	2467	14.98
	13	2472	13.39
802.11g	1	2412	17.52
	6	2437	17.72
	11	2462	17.84
	12	2467	14.16
	13	2472	11.16
802.11n HT20	1	2412	17.33
	6	2437	17.76
	11	2462	17.62
	12	2467	13.75
	13	2472	11.11
802.11n HT40	3	2422	14.57
	6	2437	17.66
	9	2452	14.67
	10	2457	11.84
	11	2462	9.7
802.11ax HE20	1	2412	17.01
	6	2437	17.79
	11	2462	17.23
	12	2467	13.9
	13	2472	9.67
802.11ax HE40	3	2422	14.69
	6	2437	17.66
	9	2452	14.69
	10	2457	12.28
	11	2462	9.74

WLAN Conducted Power (Laptop)			
Bluetooth Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
BR / EDR	0	2402	11.44
	39	2441	11.18
	78	2480	11.13
LE	0	2402	9.55
	19	2440	9.53
	39	2480	9.52

WLAN Conducted Power (Laptop)			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	8.01
	40	5200	8.15
	44	5220	8.17
	48	5240	8.19
802.11n HT20	36	5180	8.11
	40	5200	8.1
	44	5220	8.33
	48	5240	8.31
802.11n HT40	38	5190	8.12
	46	5230	8.3
802.11ac VHT80	42	5210	8.43
802.11ax HE20	36	5180	8.38
	40	5200	8.39
	44	5220	8.17
	48	5240	8.05
802.11ax HE40	38	5190	8.27
	46	5230	8.14
802.11ax HE80	42	5210	8.32

WLAN Conducted Power (Laptop)			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	9.03
	40	5200	9.24
	44	5220	9.37
	48	5240	9.33
802.11n HT20	36	5180	9.11
	40	5200	9.25
	44	5220	9
	48	5240	9.03
802.11n HT40	38	5190	9.28
	46	5230	9.34
802.11ac VHT80	42	5210	9.47
802.11ax HE20	36	5180	9.19
	40	5200	9.2
	44	5220	9.2
	48	5240	9.3
802.11ax HE40	38	5190	9.27
	46	5230	9.11
802.11ax HE80	42	5210	9.31

WLAN Conducted Power (Laptop)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	8.04
	56	5280	8.03
	60	5300	8.06
	64	5320	8.15
802.11n HT20	52	5260	8.1
	56	5280	8.03
	60	5300	8.05
	64	5320	8.07
802.11n HT40	54	5270	8.05
	62	5310	8.1
802.11ac VHT80	58	5290	8.11
802.11ac VHT160	50	5250	8.36
802.11ax HE20	52	5260	8.17
	56	5280	8.17
	60	5300	8.08
	64	5320	8.2
802.11ax HE40	54	5270	8.05
	62	5310	8
802.11ax HE80	58	5290	8.02
802.11ax HE160	50	5250	8.06

WLAN Conducted Power (Laptop)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	9.31
	56	5280	9.13
	60	5300	9.08
	64	5320	9
802.11n HT20	52	5260	9.31
	56	5280	9.22
	60	5300	9.18
	64	5320	9.19
802.11n HT40	54	5270	9.27
	62	5310	9.38
802.11ac VHT80	58	5290	9.05
802.11ac VHT160	50	5250	9.48
802.11ax HE20	52	5260	9.18
	56	5280	9.01
	60	5300	9.36
	64	5320	9.29
802.11ax HE40	54	5270	9.25
	62	5310	9.11
802.11ax HE80	58	5290	9.26
802.11ax HE160	50	5250	9.11

WLAN Conducted Power (Laptop)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	10.08
	116	5580	10.2
	120	5600	10.04
	124	5620	10.31
	132	5660	10.33
	140	5700	10.17
	144	5720	10.1
802.11n HT20	100	5500	10.12
	116	5580	10.16
	120	5600	10
	124	5620	10.13
	132	5660	10.07
	140	5700	10.39
	144	5720	10.02
802.11n HT40	102	5510	10.22
	110	5550	10.05
	118	5590	10.38
	126	5630	10.34
	134	5670	10.12
	142	5710	10.13
802.11ac VHT80	106	5530	10.44
	122	5610	10.41
	138	5690	10.29
802.11ac VHT160	114	5570	10.46
802.11ax HE20	100	5500	10.32
	116	5580	10.25
	120	5600	10.28
	124	5620	10.05
	132	5660	10.01
	140	5700	10.15
	144	5720	10.26
802.11ax HE40	102	5510	10.34
	110	5550	10.03
	118	5590	10.18
	126	5630	10.03
	134	5670	10.09
	142	5710	10.23
802.11ax HE80	106	5530	10.2
	122	5610	10.03
	138	5690	10.12
802.11ax HE160	114	5570	10.27

WLAN Conducted Power (Laptop)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	12.25
	116	5580	12.1
	120	5600	12.12
	124	5620	12.18
	132	5660	12.1
	140	5700	12.26
	144	5720	12.4
802.11n HT20	100	5500	12.23
	116	5580	12.15
	120	5600	12.32
	124	5620	12.09
	132	5660	12.27
	140	5700	12.33
	144	5720	12.35
802.11n HT40	102	5510	12.13
	110	5550	12.3
	118	5590	12.12
	126	5630	12.16
	134	5670	12.04
	142	5710	12.02
802.11ac VHT80	106	5530	12.46
	122	5610	12.27
	138	5690	12.31
802.11ac VHT160	114	5570	12.47
802.11ax HE20	100	5500	12.13
	116	5580	12.26
	120	5600	12.02
	124	5620	12.36
	132	5660	12.27
	140	5700	12.24
	144	5720	12.19
802.11ax HE40	102	5510	12.16
	110	5550	12.04
	118	5590	12.25
	126	5630	12.17
	134	5670	12.07
	142	5710	12.33
802.11ax HE80	106	5530	12.23
	122	5610	12.08
	138	5690	12.35
802.11ax HE160	114	5570	12.37

WLAN Conducted Power (Laptop)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	10.33
	153	5765	10.1
	157	5785	10.3
	161	5805	10.38
	165	5825	10.36
802.11n HT20	149	5745	10.34
	153	5765	10.32
	157	5785	10.32
	161	5805	10.22
	165	5825	10.27
802.11n HT40	151	5755	10.2
	159	5795	10.27
802.11ac VHT80	155	5775	10.48
802.11ax HE20	149	5745	10.21
	153	5765	10.18
	157	5785	10.35
	161	5805	10.36
	165	5825	10.24
802.11ax HE40	151	5755	10.27
	159	5795	10.02
802.11ax HE80	155	5775	10.24

WLAN Conducted Power (Laptop)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	12.26
	153	5765	12.27
	157	5785	12.3
	161	5805	12.15
	165	5825	12.25
802.11n HT20	149	5745	12.04
	153	5765	12.32
	157	5785	12.1
	161	5805	12.38
	165	5825	12.29
802.11n HT40	151	5755	12.14
	159	5795	12.02
802.11ac VHT80	155	5775	12.48
802.11ax HE20	149	5745	12.29
	153	5765	12.19
	157	5785	12.12
	161	5805	12.1
	165	5825	12.32
802.11ax HE40	151	5755	12.14
	159	5795	12.21
802.11ax HE80	155	5775	12.17

WLAN Conducted Power (Laptop)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	1	5955	0.78
	5	5975	0.76
	9	5995	0.74
	13	6015	0.7
	17	6035	0.75
	21	6055	0.54
	25	6075	0.61
	29	6095	0.71
	33	6115	0.75
	37	6135	0.56
	41	6155	0.65
	45	6175	0.8
	49	6195	0.71
	53	6215	0.77
	57	6235	0.7
	61	6255	0.63
	65	6275	0.5
	69	6295	0.55
	73	6315	0.63
	77	6335	0.54
	81	6355	0.73
	85	6375	0.78
	89	6395	0.53
	93	6415	0.63
802.11ax HE40	3	5965	3.1
	11	6005	3.11
	19	6045	3.28
	27	6085	3.15
	35	6125	3.3
	43	6165	3.25
	51	6205	3.07
	59	6245	3.12
	67	6285	3.08
	75	6325	3.18
	83	6365	3.2
	91	6405	3.16
802.11ax HE80	7	5985	6.78
	23	6065	6.78
	39	6145	6.79
	55	6225	6.67
	71	6305	6.76
	87	6385	6.61

WLAN Conducted Power (Laptop)			
802.11ax HE160	15	6025	8.97
	47	6185	8.87
	79	6345	9.36

WLAN Conducted Power (Laptop)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	1	5955	0.67
	5	5975	0.82
	9	5995	0.51
	13	6015	0.58
	17	6035	0.75
	21	6055	0.9
	25	6075	0.9
	29	6095	0.89
	33	6115	0.53
	37	6135	0.5
	41	6155	0.71
	45	6175	0.87
	49	6195	0.83
	53	6215	0.57
	57	6235	0.75
	61	6255	0.61
	65	6275	0.78
	69	6295	0.58
	73	6315	0.79
	77	6335	0.81
	81	6355	0.69
	85	6375	0.57
	89	6395	0.7
	93	6415	0.59
802.11ax HE40	3	5965	3.27
	11	6005	3.4
	19	6045	3.33
	27	6085	3.36
	35	6125	3.28
	43	6165	3
	51	6205	3.11
	59	6245	3.3
	67	6285	3.07
	75	6325	3.09
	83	6365	3.12
	91	6405	3.1
802.11ax HE80	7	5985	6.8
	23	6065	6.53
	39	6145	6.84
	55	6225	6.56
	71	6305	6.57
	87	6385	6.57

WLAN Conducted Power (Laptop)			
802.11ax HE160	15	6025	8.92
	47	6185	8.86
	79	6345	9.44

WLAN Conducted Power (Laptop)			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	97	6435	1.1
	101	6455	1.14
	105	6475	1.11
	109	6495	1.16
	113	6515	1.1
	117	6535	1.14
802.11ax HE40	99	6445	3.67
	107	6485	3.54
	115	6525	3.58
802.11ax HE80	103	6465	6.52
	119	6545	6.62
802.11ax HE160	111	6505	9.32

WLAN Conducted Power (Laptop)			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	97	6435	1.23
	101	6455	1.08
	105	6475	1.27
	109	6495	1.3
	113	6515	1.27
	117	6535	1.38
802.11ax HE40	99	6445	3.55
	107	6485	3.65
	115	6525	3.74
802.11ax HE80	103	6465	6.62
	119	6545	6.75
802.11ax HE160	111	6505	9.45

WLAN Conducted Power (Laptop)			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	121	6555	1.13
	125	6575	1.19
	129	6595	1.39
	133	6615	1.37
	137	6635	1.37
	141	6655	1.03
	145	6675	1.39
	149	6695	1.39
	153	6715	1.14
	157	6735	1.39
	161	6755	1.3
	165	6775	1.05
	169	6795	1.14
	173	6815	1.26
	177	6835	1.27
	181	6855	1.21
	185	6875	1.62
802.11ax HE40	123	6565	3.77
	131	6605	3.65
	139	6645	3.54
	147	6685	3.83
	155	6725	3.8
	163	6765	3.61
	171	6805	3.6
	179	6845	3.73
	187	6885	4.26
802.11ax HE80	135	6625	6.5
	151	6705	6.55
	167	6785	6.74
	183	6865	6.6
802.11ax HE160	143	6665	8.87
	175	6825	8.95

WLAN Conducted Power (Laptop)			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	121	6555	1.06
	125	6575	1.01
	129	6595	1.13
	133	6615	1.07
	137	6635	1.05
	141	6655	1.06
	145	6675	1.18
	149	6695	1.12
	153	6715	1.13
	157	6735	1.05
	161	6755	1.23
	165	6775	1.19
	169	6795	1.01
	173	6815	1.23
	177	6835	1.16
	181	6855	1.05
	185	6875	1.62
802.11ax HE40	123	6565	3.5
	131	6605	3.55
	139	6645	3.67
	147	6685	3.52
	155	6725	3.67
	163	6765	3.51
	171	6805	3.51
	179	6845	3.57
	187	6885	4.15
802.11ax HE80	135	6625	6.66
	151	6705	6.5
	167	6785	6.62
	183	6865	6.6
802.11ax HE160	143	6665	8.83
	175	6825	8.75

WLAN Conducted Power (Laptop)			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	189	6895	1.67
	193	6915	1.58
	197	6935	1.52
	201	6955	1.82
	205	6975	1.64
	209	6995	1.5
	213	7015	1.87
	217	7035	1.52
	221	7055	1.89
	225	7075	1.5
	229	7095	1.81
	233	7115	1.6
802.11ax HE40	195	6925	4.38
	203	6965	4.07
	211	7005	4.3
	219	7045	4.19
	227	7085	4.32
802.11ax HE80	199	6945	7.21
	215	7025	7.38
802.11ax HE160	207	6985	9.48

WLAN Conducted Power (Laptop)			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	189	6895	1.67
	193	6915	1.83
	197	6935	1.69
	201	6955	1.79
	205	6975	1.72
	209	6995	1.67
	213	7015	1.75
	217	7035	1.83
	221	7055	1.5
	225	7075	1.57
	229	7095	1.7
	233	7115	1.53
802.11ax HE40	195	6925	4.02
	203	6965	4.36
	211	7005	4.11
	219	7045	4.23
	227	7085	4.06
802.11ax HE80	199	6945	7.13
	215	7025	7.36
802.11ax HE160	207	6985	9.47

Annex F. SAR Test Result

SAR Results for Body Exposure Condition.

Note:

1. SAR testing for WLAN was performed on the maximum power mode.
2. The “< 0.001” means there is no SAR value or the SAR is too low to be measured.

Body SAR Test Result

System & Position						DUT & Accessory			SAR							
Plot No	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Brand	Ant Status	Battery SKU	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Front for Laptop	0	6	South Star	Ant 0	3	100.00	1.00	15.50	15.41	1.02	0.1	1.11	1.13
	WLAN2.4G	802.11b	Front for Laptop	0	6	South Star	Ant 1	3	100.00	1.00	18.00	17.99	1.00	0.09	1.07	1.07
	WLAN2.4G	802.11b	Bottom for Laptop	0	6	South Star	Ant 0	3	100.00	1.00	15.50	15.41	1.02	-0.05	0.761	0.78
	WLAN2.4G	802.11b	Bottom for Laptop	0	6	South Star	Ant 1	3	100.00	1.00	18.00	17.99	1.00	-0.02	0.516	0.52
1	WLAN2.4G	802.11b	Rear Face	0	6	South Star	Ant 0	3	100.00	1.00	18.00	17.83	1.04	0.09	1.11	1.15
	WLAN2.4G	802.11b	Left Side	0	6	South Star	Ant 0	3	100.00	1.00	18.00	17.83	1.04	-0.19	0.325	0.34
	WLAN2.4G	802.11b	Right Side	0	6	South Star	Ant 0	3	100.00	1.00	18.00	17.83	1.04	-0.14	0.202	0.21
	WLAN2.4G	802.11b	Top Side	0	6	South Star	Ant 0	3	100.00	1.00	18.00	17.83	1.04	-0.13	0.753	0.78
	WLAN2.4G	802.11b	Bottom Side	0	6	South Star	Ant 0	3	100.00	1.00	18.00	17.83	1.04	-0.12	0.081	0.08
	WLAN2.4G	802.11b	Rear Face	0	6	South Star	Ant 1	3	100.00	1.00	12.50	12.49	1.00	0.01	0.418	0.42
	WLAN2.4G	802.11b	Left Side	0	6	South Star	Ant 1	3	100.00	1.00	12.50	12.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side	0	6	South Star	Ant 1	3	100.00	1.00	12.50	12.49	1.00	0.09	0.017	0.02
	WLAN2.4G	802.11b	Top Side	0	6	South Star	Ant 1	3	100.00	1.00	12.50	12.49	1.00	-0.03	0.171	0.17
	WLAN2.4G	802.11b	Bottom Side	0	6	South Star	Ant 1	3	100.00	1.00	12.50	12.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Front for Laptop	0	1	South Star	Ant 0	3	100.00	1.00	15.50	15.34	1.04	0.03	1.03	1.07
	WLAN2.4G	802.11b	Front for Laptop	0	11	South Star	Ant 0	3	100.00	1.00	15.50	15.16	1.08	0.01	0.985	1.06
	WLAN2.4G	802.11b	Front for Laptop	0	12	South Star	Ant 0	3	100.00	1.00	15.00	14.88	1.03	0.18	0.953	0.98
	WLAN2.4G	802.11b	Front for Laptop	0	13	South Star	Ant 0	3	100.00	1.00	13.50	13.27	1.05	-0.05	0.917	0.96
	WLAN2.4G	802.11b	Front for Laptop	0	1	South Star	Ant 1	3	100.00	1.00	18.00	17.94	1.01	0.03	1.01	1.02
	WLAN2.4G	802.11b	Front for Laptop	0	11	South Star	Ant 1	3	100.00	1.00	17.50	17.39	1.03	0.11	0.975	1.00
	WLAN2.4G	802.11b	Front for Laptop	0	12	South Star	Ant 1	3	100.00	1.00	15.00	14.98	1.00	-0.17	0.944	0.94
	WLAN2.4G	802.11b	Front for Laptop	0	13	South Star	Ant 1	3	100.00	1.00	13.50	13.39	1.03	0.05	0.912	0.94
	WLAN2.4G	802.11b	Rear Face	0	1	South Star	Ant 0	3	100.00	1.00	18.00	17.81	1.04	-0.15	1.04	1.08
	WLAN2.4G	802.11b	Rear Face	0	11	South Star	Ant 0	3	100.00	1.00	17.50	17.49	1.00	0.14	0.86	0.86
	WLAN2.4G	802.11b	Rear Face	0	12	South Star	Ant 0	3	100.00	1.00	15.00	14.88	1.03	0.08	0.443	0.46
	WLAN2.4G	802.11b	Rear Face	0	13	South Star	Ant 0	3	100.00	1.00	13.50	13.27	1.05	-0.07	0.308	0.32
	WLAN2.4G	802.11b	Rear Face	0	6	Pulse	Ant 0	3	100.00	1.00	18.00	17.83	1.04	0.02	0.981	1.02
	WLAN2.4G	802.11b	Rear Face	0	6	South Star	Ant 0	1	100.00	1.00	18.00	17.83	1.04	0.03	1.02	1.06
	WLAN2.4G	802.11b	Rear Face	0	1	South Star	Ant 0	3	100.00	1.00	18.00	17.81	1.04	0.01	0.919	0.96
	WLAN2.4G	802.11b	Rear Face	0	11	South Star	Ant 0	3	100.00	1.00	17.50	17.49	1.00	-0.08	0.76	0.76
	WLAN2.4G	802.11b	Rear Face	0	12	South Star	Ant 0	3	100.00	1.00	15.00	14.88	1.03	0.15	0.392	0.40
	WLAN2.4G	802.11b	Rear Face	0	13	South Star	Ant 0	3	100.00	1.00	13.50	13.27	1.05	-0.06	0.272	0.29
	WLAN2.4G	802.11b	Rear Face	0	1	South Star	Ant 0	1	100.00	1.00	18.00	17.81	1.04	0.01	0.956	0.99
	WLAN2.4G	802.11b	Rear Face	0	11	South Star	Ant 0	1	100.00	1.00	17.50	17.49	1.00	-0.08	0.79	0.79
	WLAN2.4G	802.11b	Rear Face	0	12	South Star	Ant 0	1	100.00	1.00	15.00	14.88	1.03	0.15	0.407	0.42
	WLAN2.4G	802.11b	Rear Face	0	13	South Star	Ant 0	1	100.00	1.00	13.50	13.27	1.05	-0.06	0.283	0.30
	WLAN2.4G	802.11b	Rear Face	0	6	South Star	Ant 0	3	100.00	1.00	18.00	17.83	1.04	0.09	1.08	1.12

Body SAR Test Result

System & Position						DUT & Accessory			SAR							
Plot No	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Brand	Ant Status	Battery SKU	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.3G	802.11ac VHT160	Front for Laptop	0	50	South Star	Ant 0	3	100.00	1.00	8.50	8.36	1.03	-0.03	1.03	1.06
	WLAN5.3G	802.11ac VHT160	Front for Laptop	0	50	South Star	Ant 1	3	100.00	1.00	9.50	9.48	1.00	0.15	1.12	1.12
	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50	South Star	Ant 0	3	100.00	1.00	8.50	8.36	1.03	0.07	0.113	0.12
	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50	South Star	Ant 1	3	100.00	1.00	9.50	9.48	1.00	0.03	0.105	0.11
	WLAN5.3G	802.11ac VHT80	Rear Face	0	58	South Star	Ant 0	3	100.00	1.00	14.00	13.97	1.01	0.02	0.841	0.85
	WLAN5.3G	802.11ac VHT80	Left Side	0	58	South Star	Ant 0	3	100.00	1.00	14.00	13.97	1.01	-0.18	0.039	0.04
	WLAN5.3G	802.11ac VHT80	Right Side	0	58	South Star	Ant 0	3	100.00	1.00	14.00	13.97	1.01	0	<0.001	0.00
2	WLAN5.3G	802.11ac VHT80	Top Side	0	58	South Star	Ant 0	3	100.00	1.00	14.00	13.97	1.01	-0.04	1.13	1.14
	WLAN5.3G	802.11ac VHT80	Bottom Side	0	58	South Star	Ant 0	3	100.00	1.00	14.00	13.97	1.01	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50	South Star	Ant 1	3	100.00	1.00	10.00	9.86	1.03	-0.05	0.485	0.50
	WLAN5.3G	802.11ac VHT160	Left Side	0	50	South Star	Ant 1	3	100.00	1.00	10.00	9.86	1.03	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Right Side	0	50	South Star	Ant 1	3	100.00	1.00	10.00	9.86	1.03	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Top Side	0	50	South Star	Ant 1	3	100.00	1.00	10.00	9.86	1.03	-0.07	0.902	0.93
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50	South Star	Ant 1	3	100.00	1.00	10.00	9.86	1.03	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT80	Top Side	0	58	Pulse	Ant 0	3	100.00	1.00	14.00	13.97	1.01	0.12	0.986	1.00
	WLAN5.3G	802.11ac VHT80	Top Side	0	58	South Star	Ant 0	1	100.00	1.00	14.00	13.97	1.01	0.03	1.01	1.02
	WLAN5.3G	802.11ac VHT80	Top Side	0	58	South Star	Ant 0	3	100.00	1.00	14.00	13.97	1.01	-0.04	1.09	1.10
	WLAN5.6G	802.11ac VHT160	Front for Laptop	0	114	South Star	Ant 0	3	100.00	1.00	10.50	10.46	1.01	-0.18	1.11	1.12
	WLAN5.6G	802.11ac VHT160	Front for Laptop	0	114	South Star	Ant 1	3	100.00	1.00	12.50	12.47	1.01	-0.01	1.09	1.10
	WLAN5.6G	802.11ac VHT160	Bottom for Laptop	0	114	South Star	Ant 0	3	100.00	1.00	10.50	10.46	1.01	0.05	0.139	0.14
	WLAN5.6G	802.11ac VHT160	Bottom for Laptop	0	114	South Star	Ant 1	3	100.00	1.00	12.50	12.47	1.01	0.12	0.238	0.24
	WLAN5.6G	802.11ac VHT80	Rear Face	0	106	South Star	Ant 0	3	100.00	1.00	14.50	14.45	1.01	0.12	1.01	1.02
	WLAN5.6G	802.11ac VHT80	Left Side	0	106	South Star	Ant 0	3	100.00	1.00	14.50	14.45	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT80	Right Side	0	106	South Star	Ant 0	3	100.00	1.00	14.50	14.45	1.01	0	<0.001	0.00
3	WLAN5.6G	802.11ac VHT80	Top Side	0	106	South Star	Ant 0	3	100.00	1.00	14.50	14.45	1.01	-0.08	1.13	1.14
	WLAN5.6G	802.11ac VHT80	Bottom Side	0	106	South Star	Ant 0	3	100.00	1.00	14.50	14.45	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ax HE160	Rear Face	0	114	South Star	Ant 1	3	100.00	1.00	12.50	12.46	1.01	-0.05	0.711	0.72
	WLAN5.6G	802.11ax HE160	Left Side	0	114	South Star	Ant 1	3	100.00	1.00	12.50	12.46	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ax HE160	Right Side	0	114	South Star	Ant 1	3	100.00	1.00	12.50	12.46	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ax HE160	Top Side	0	114	South Star	Ant 1	3	100.00	1.00	12.50	12.46	1.01	-0.09	1.1	1.11
	WLAN5.6G	802.11ax HE160	Bottom Side	0	114	South Star	Ant 1	3	100.00	1.00	12.50	12.46	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT80	Rear Face	0	122	South Star	Ant 0	3	100.00	1.00	14.50	14.35	1.04	-0.01	0.596	0.62
	WLAN5.6G	802.11ac VHT80	Rear Face	0	138	South Star	Ant 0	3	100.00	1.00	14.50	14.43	1.02	0.07	0.69	0.70
	WLAN5.6G	802.11ac VHT160	Top Side	0	122	South Star	Ant 0	3	100.00	1.00	14.50	14.35	1.04	0.18	0.993	1.03
	WLAN5.6G	802.11ac VHT160	Top Side	0	138	South Star	Ant 0	3	100.00	1.00	14.50	14.43	1.02	0.05	0.814	0.83
	WLAN5.6G	802.11ac VHT80	Top Side	0	106	Pulse	Ant 0	3	100.00	1.00	14.50	14.45	1.01	0.12	0.987	1.00
	WLAN5.6G	802.11ac VHT80	Top Side	0	106	South Star	Ant 0	1	100.00	1.00	14.50	14.45	1.01	-0.03	0.898	0.91
	WLAN5.6G	802.11ac VHT160	Top Side	0	122	Pulse	Ant 0	3	100.00	1.00	14.50	14.35	1.04	-0.13	0.867	0.90
	WLAN5.6G	802.11ac VHT160	Top Side	0	138	Pulse	Ant 0	3	100.00	1.00	14.50	14.43	1.02	-0.02	0.711	0.73
	WLAN5.6G	802.11ac VHT160	Top Side	0	122	South Star	Ant 0	1	100.00	1.00	14.50	14.35	1.04	0.12	0.789	0.82
	WLAN5.6G	802.11ac VHT160	Top Side	0	138	South Star	Ant 0	1	100.00	1.00	14.50	14.43	1.02	-0.03	0.647	0.66
	WLAN5.6G	802.11ac VHT80	Top Side	0	106	South Star	Ant 0	3	100.00	1.00	14.50	14.45	1.01	-0.08	1.09	1.10

Body SAR Test Result

System & Position						DUT & Accessory			SAR							
Plot No	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Brand	Ant Status	Battery SKU	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.8G	802.11ac VHT80	Front for Laptop	0	155	South Star	Ant 0	3	100.00	1.00	10.50	10.48	1.00	-0.07	1.12	1.12
	WLAN5.8G	802.11ac VHT80	Front for Laptop	0	155	South Star	Ant 1	3	100.00	1.00	12.50	12.48	1.00	0.01	1.02	1.02
	WLAN5.8G	802.11ac VHT80	Bottom for Laptop	0	155	South Star	Ant 0	3	100.00	1.00	10.50	10.48	1.00	-0.11	0.087	0.09
	WLAN5.8G	802.11ac VHT80	Bottom for Laptop	0	155	South Star	Ant 1	3	100.00	1.00	12.50	12.48	1.00	-0.04	0.042	0.04
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155	South Star	Ant 0	3	100.00	1.00	14.00	13.87	1.03	0.13	0.613	0.63
	WLAN5.8G	802.11ac VHT80	Left Side	0	155	South Star	Ant 0	3	100.00	1.00	14.00	13.87	1.03	-0.17	0.031	0.03
	WLAN5.8G	802.11ac VHT80	Right Side	0	155	South Star	Ant 0	3	100.00	1.00	14.00	13.87	1.03	0	<0.001	0.00
4	WLAN5.8G	802.11ac VHT80	Top Side	0	155	South Star	Ant 0	3	100.00	1.00	14.00	13.87	1.03	-0.02	1.11	1.14
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155	South Star	Ant 0	3	100.00	1.00	14.00	13.87	1.03	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155	South Star	Ant 1	3	100.00	1.00	10.00	9.98	1.00	-0.14	0.799	0.80
	WLAN5.8G	802.11ac VHT80	Left Side	0	155	South Star	Ant 1	3	100.00	1.00	10.00	9.98	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Right Side	0	155	South Star	Ant 1	3	100.00	1.00	10.00	9.98	1.00	-0.05	0.034	0.03
	WLAN5.8G	802.11ac VHT80	Top Side	0	155	South Star	Ant 1	3	100.00	1.00	10.00	9.98	1.00	0.15	0.283	0.28
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155	South Star	Ant 1	3	100.00	1.00	10.00	9.98	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side	0	155	Pulse	Ant 0	3	100.00	1.00	14.00	13.87	1.03	0.12	1.05	1.08
	WLAN5.8G	802.11ac VHT80	Top Side	0	155	South Star	Ant 0	1	100.00	1.00	14.00	13.87	1.03	0.03	0.991	1.02
	WLAN5.8G	802.11ac VHT80	Front for Laptop	0	155	South Star	Ant 0	3	100.00	1.00	10.50	10.48	1.00	-0.02	1.07	1.07
	BT	BDR	Front for Laptop	0	0	South Star	Ant 0	3	76.70	1.30	11.50	11.44	1.01	0.15	0.114	0.15
	BT	BDR	Bottom for Laptop	0	0	South Star	Ant 0	3	76.70	1.30	11.50	11.44	1.01	0.02	0.034	0.04
5	BT	BDR	Rear Face	0	0	South Star	Ant 0	3	76.70	1.30	11.50	11.44	1.01	0.05	0.299	0.39
	BT	BDR	Left Side	0	0	South Star	Ant 0	3	76.70	1.30	11.50	11.44	1.01	0.1	0.033	0.04
	BT	BDR	Right Side	0	0	South Star	Ant 0	3	76.70	1.30	11.50	11.44	1.01	0	<0.001	0.00
	BT	BDR	Top Side	0	0	South Star	Ant 0	3	76.70	1.30	11.50	11.44	1.01	-0.16	0.117	0.15
	BT	BDR	Bottom Side	0	0	South Star	Ant 0	3	76.70	1.30	11.50	11.44	1.01	0	<0.001	0.00
	BT	BDR	Rear Face	0	39	South Star	Ant 0	3	76.70	1.30	11.50	11.18	1.08	-0.05	0.277	0.39
	BT	BDR	Rear Face	0	78	South Star	Ant 0	3	76.70	1.30	11.50	11.13	1.09	0.05	0.221	0.31
	BT	BDR	Rear Face	0	0	Pulse	Ant 0	3	76.70	1.30	11.50	11.44	1.01	-0.12	0.275	0.36
	BT	BDR	Rear Face	0	0	South Star	Ant 0	1	76.70	1.30	11.50	11.44	1.01	-0.09	0.264	0.35

SAR and Power Density Test Result																											
System & Position						DUT & Accessory			SAR										Power Density								
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Brand	Ant Status	Battery SKU	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	Measured APD W/m ² (4cm ²)	Scaled APD W/m ² (4cm ²)	Grid Step [λ]	iPD [W/m2]	Scaling Factor for Measurement Uncertainty	Averaging Area [cm2]	Power Drift [dB]	Normal psPD [W/m2]	Scaled Normal psPD [W/m2]	Total psPD [W/m2]	Scaled Total psPD [W/m2]
	UNII-8	802.11ax HE160	Front for Laptop	0	207	South Star	Ant 0	3	86.90	1.15	9.50	9.48	1.00	0.05	0.271	0.31	2.05	2.36			-			-		-	
	UNII-8	802.11ax HE160	Front for Laptop	0	207	South Star	Ant 1	3	88.00	1.14	9.50	9.47	1.01	0.03	0.217	0.25	1.61	1.85			-			-		-	
	UNII-8	802.11ax HE160	Bottom for Laptop	0	207	South Star	Ant 0	3	86.90	1.15	9.50	9.48	1.00	-0.13	0.066	0.08	0.534	0.61			-			-		-	
	UNII-8	802.11ax HE160	Bottom for Laptop	0	207	South Star	Ant 1	3	88.00	1.14	9.50	9.47	1.01	-0.01	0.045	0.05	0.282	0.32			-			-		-	
	UNII-8	802.11ax HE160	Rear Face	0	207	South Star	Ant 0	3	86.90	1.15	9.50	9.48	1.00	0.11	0.51	0.59	3.82	4.39			-			-		-	
	UNII-8	802.11ax HE160	Left Side	0	207	South Star	Ant 0	3	86.90	1.15	9.50	9.48	1.00	0	<0.001	0.00	0	0			-			-		-	
	UNII-8	802.11ax HE160	Right Side	0	207	South Star	Ant 0	3	86.90	1.15	9.50	9.48	1.00	0	<0.001	0.00	0	0			-			-		-	
	UNII-8	802.11ax HE160	Top Side	0	207	South Star	Ant 0	3	86.90	1.15	9.50	9.48	1.00	-0.05	0.264	0.30	2	2.3			-			-		-	
	UNII-8	802.11ax HE160	Bottom Side	0	207	South Star	Ant 0	3	86.90	1.15	9.50	9.48	1.00	0	<0.001	0.00	0	0			-			-		-	
	UNII-8	802.11ax HE160	Rear Face	0	207	South Star	Ant 1	3	88.00	1.14	9.50	9.47	1.01	-0.07	0.477	0.55	3.32	3.82			-			-		-	
	UNII-8	802.11ax HE160	Left Side	0	207	South Star	Ant 1	3	88.00	1.14	9.50	9.47	1.01	0	<0.001	0.00	0	0			-			-		-	
	UNII-8	802.11ax HE160	Right Side	0	207	South Star	Ant 1	3	88.00	1.14	9.50	9.47	1.01	0	<0.001	0.00	0	0			-			-		-	
	UNII-8	802.11ax HE160	Top Side	0	207	South Star	Ant 1	3	88.00	1.14	9.50	9.47	1.01	-0.03	0.347	0.40	2.37	2.73			-			-		-	
	UNII-8	802.11ax HE160	Bottom Side	0	207	South Star	Ant 1	3	88.00	1.14	9.50	9.47	1.01	0	<0.001	0.00	0	0			-			-		-	
6	UNII-5	802.11ax HE160	Rear Face	0	15	South Star	Ant 1	3	88.00	1.14	9.00	8.92	1.02	-0.12	0.411	0.48	2.93	3.41			-			-		-	
	UNII-5	802.11ax HE160	Rear Face	0	47	South Star	Ant 1	3	88.00	1.14	9.00	8.86	1.03	-0.03	0.516	0.61	4.12	4.84	0.25	2.50	1.545	4.00	0.01	1.32	2.32	1.96	3.45
	UNII-5	802.11ax HE160	Rear Face	0	79	South Star	Ant 1	3	88.00	1.14	9.50	9.44	1.01	0.09	0.445	0.51	3.53	4.06			-			-		-	
	UNII-6	802.11ax HE160	Rear Face	0	111	South Star	Ant 1	3	88.00	1.14	9.50	9.45	1.01	0.08	0.425	0.49	3.64	4.19			-			-		-	
	UNII-7	802.11ax HE160	Rear Face	0	143	South Star	Ant 1	3	88.00	1.14	9.00	8.83	1.04	0.08	0.309	0.37	1.96	2.32			-			-		-	
	UNII-7	802.11ax HE160	Rear Face	0	175	South Star	Ant 1	3	88.00	1.14	9.00	8.75	1.06	-0.12	0.438	0.53	2.9	3.50			-			-		-	
	UNII-5	802.11ax HE160	Rear Face	0	47	Pulse	Ant 1	3	88.00	1.14	9.00	8.86	1.03	-0.03	0.481	0.56	3.86	4.53			-			-		-	
	UNII-5	802.11ax HE160	Rear Face	0	47	South Star	Ant 1	1	88.00	1.14	9.00	8.86	1.03	0.03	0.463	0.54	4.09	4.80			-			-		-	

Annex G. SAR Measurement Variability

SAR repeated measurement are shown as below.

Repeat SAR							
Plot	Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio
R01	WLAN2.4G	802.11b	Rear Face	6	1.11	1.08	1.03
R02	WLAN5.3G	802.11ac VHT80	Top Side	58	1.13	1.09	1.04
R03	WLAN5.6G	802.11ac VHT80	Top Side	106	1.13	1.09	1.04
R04	WLAN5.8G	802.11ac VHT80	Front for Laptop	155	1.12	1.07	1.04

Annex H. Analysis of Simultaneous Transmission SAR.

The analysis of simultaneous transmission SAR are shown as below.

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
A	WLAN 2.4G_Ant 0 + BT_Ant 0	Yes
B	WLAN 2.4G_Ant 0 + WLAN2.4G_Ant 1	Yes
C	WLAN 5G_Ant 0 + BT_Ant 0	Yes
D	WLAN 5G_Ant 0 + WLAN 5G_Ant 1	Yes
E	WLAN 5G_Ant 0 + WLAN 5G_Ant 1 + BT_Ant 0	Yes
F	WLAN 6G_Ant 0 + BT_Ant 0	Yes
G	WLAN 6G_Ant 0 + WLAN 6G_Ant 1	Yes
H	WLAN 6G_Ant 0 + WLAN 6G_Ant 1 + BT_Ant 0	Yes

Notes


1. The WLAN 2.4G and WLAN 5G cannot transmit simultaneously.
2. Combination C and D are covered by Combination E.
3. Combination F and G are covered by Combination H.


Simultaneous Transmission SAR Evaluation (Body)											
Position	1	2	3	4	5	6	7	A(1+7)	B(1+2)	E(3+4+7)	H(5+6+7)
	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max BT Ant 0	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg				
Front for Laptop	1.13	1.07	1.12	1.12	0.31	0.25	0.15	1.28	2.20	2.39	0.71
Bottom for Laptop	0.78	0.52	0.19	0.29	0.08	0.05	0.04	0.82	1.30	0.52	0.17
Rear Face	1.15	0.42	1.02	0.80	0.59	0.61	0.39	1.54	1.57	2.21	1.59
Left Side	0.34	0.00	0.04	0.00	0.00	0.00	0.04	0.38	0.34	0.08	0.04
Right Side	0.21	0.02	0.00	0.03	0.00	0.00	0.00	0.21	0.23	0.03	0.00
Top Side	0.78	0.17	1.14	1.11	0.30	0.40	0.15	0.93	0.95	2.40	0.85
Bottom Side	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.08	0.00	0.00


Annex I. SAR to Peak Location Separation Ratio Analysis.

The result of analysis are shown as below.



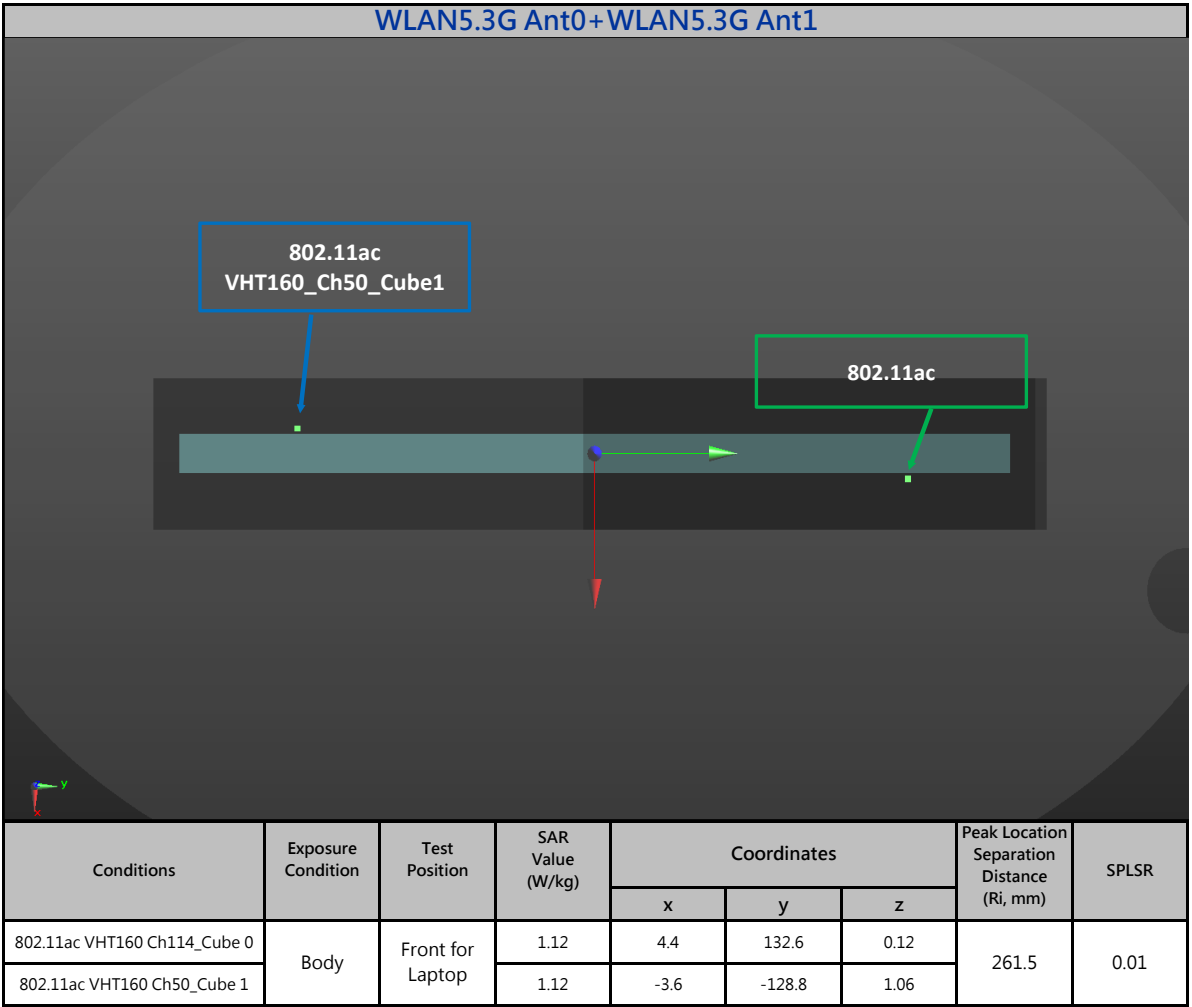

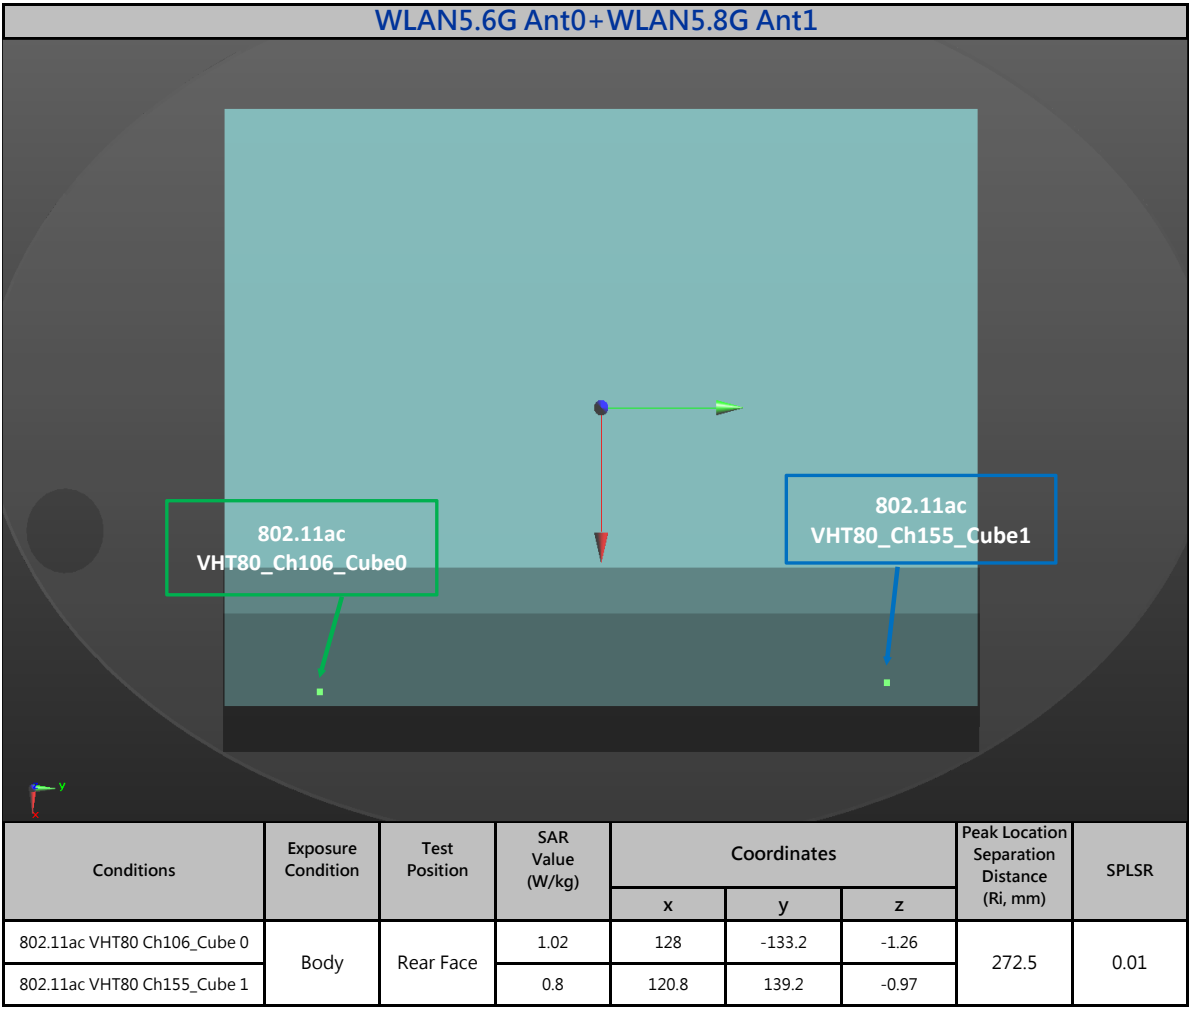

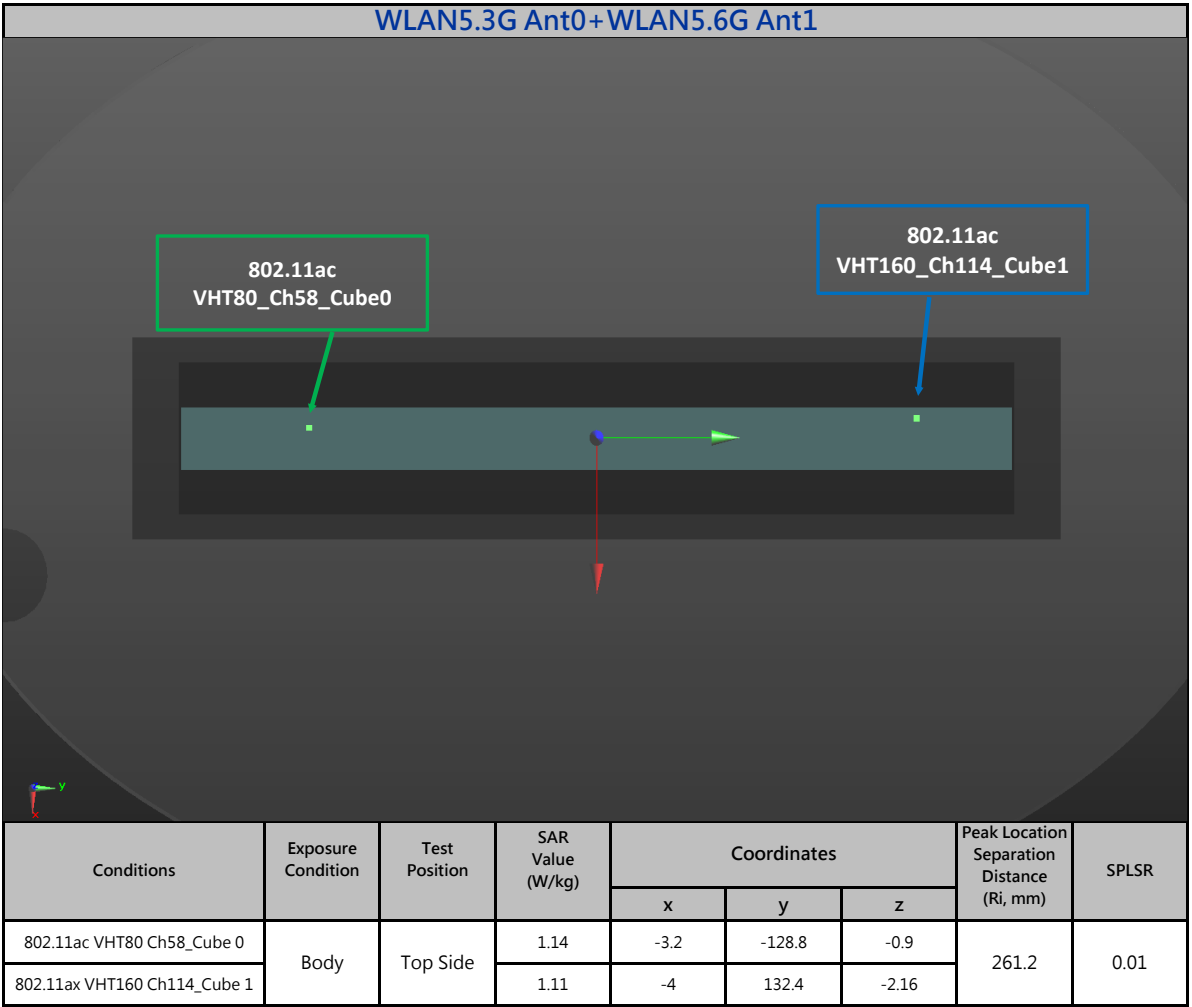

Annex J Calibration of Test Equipment List

Calibration of Test Equipment List are shown as below.

Equipment for SAR Test					
Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D2450V2	737	Aug. 26, 2021	1 Year
System Validation Dipole	SPEAG	D5GHzV2	1019	Mar. 19, 2021	2 Year
System Validation Dipole	SPEAG	D6.5GHzV2	1008	Sep. 24, 2021	1 Year
System Verification Source	SPEAG	5G Verification Source 10 GHz	1025	Jan. 17, 2022	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	3650	Mar. 24, 2022	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7736	May. 30, 2022	1 Year
E-Field Probe	SPEAG	EUmmWV3	9361	Aug. 25, 2021	1 Year
Data Acquisition Electronics	SPEAG	DAE3	579	Jun. 01, 2022	1 Year
Data Acquisition Electronics	SPEAG	DAE4	861	Mar. 23, 2022	1 Year
Spectrum Analyzer	R&S	FSL6	102006	Apr. 12, 2022	1 Year
Analog Signal Generator	R&S	SMA100B	104417	Oct. 22, 2021	1 Year
Mini-Circuits Wideband Amplifier	Mini-Circuits	ZVA-183-S+	434502031A	Aug. 20, 2021	1 Year
Power Meter	Anritsu	ML2495A	1218009	Jul. 04, 2022	1 Year
Power Sensor	Anritsu	MA2411B	1207252	Jul. 05, 2022	1 Year
Universal Wireless Test Set	Anritsu	MT8870A	6201699387	Sep. 22, 2021	1 Year
Thermometer	YFE	YF-160A	150601220	May. 16, 2022	1 Year
Dielectric Assessment Kit	SPEAG	DAKS-3.5	1092	May. 23, 2022	1 Year
Dielectric Assessment Kit	SPEAG	DAKS_VNA R140	0010917	May. 23, 2022	1 Year
Powersource1	SPEAG	SE_UMS_160 BA	4260	Jan. 13, 2022	1 Year

Annex K. Considerations Related to Bluetooth for Setup and Testing

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

The Bluetooth call box has been used during SAR measurement and the EUT was set to **DH5** mode at the maximum output power. Its duty factor was calculated as below and the measured SAR for Bluetooth would be scaled to the 100% transmission duty factor to determine compliance.

The duty factor of Bluetooth signal are shown as below.

<Time-domain plot for Bluetooth transmission signal>



Time-domain plot for Bluetooth transmission signal

The duty factor of Bluetooth signal has been calculated as following.

$$\text{Duty Factor} = \text{Pulse Width} / \text{Total Period} = (8.87 - 6) / (9.74 - 6) = 76.74\%$$

Annex L. Verifying the Mechanism Operation of Gravity-sensor

The power verified by LCD angle changed are shown as below.

Note:

1. WLAN2.4G and WLAN5G had supported G-sensor and the selection of G-Sensor experimental verification is based on the test result of worst SAR value(WLAN2.4G_802.11b_Rear Face_Ch.6_Ant 0).

1.Hall Effect and Gravity-Sensor

Orientation 1	<A> From close mode 0 degrees, open the screen in 10 degree step until laptop mode is obtained.																																													
Laptop mode	Degree	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360								
	Power	15.41	15.45	15.43	15.44	15.46																																								
Range of trigger angle	 Move back by 5 degree, until close mode is reobtained.																																													
240	Degree	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	...	270	275	280	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355								
	Power						15.42	15.45	15.46																																					
	<C> Open the screen in 1 degree steps until laptop mode is reobtained and continue opening the screen in 1 degree steps at least 5 degrees.																																													
	Degree	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36								
	Power																																15.42	15.46	15.41	15.47	15.44	15.48								
	<D> Then continue opening the screen in 10 degree steps until tablet mode is obtained.																																													
	Degree	0	10	20	35	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360								
	Power																																15.46	15.48	15.43	17.95	17.96	17.95	17.96	17.95	17.96	17.95	17.95	17.96	17.95	17.96
Orientation 2	<A> From close mode 0 degrees, open the screen in 10 degree step until laptop mode is obtained.																																													
Tablet mode	Degree	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	210	200	190	180	170	160	150	140	130	120	110	100	90	80	70	60	50	40	30	20	10	0								
	Power	17.96	17.96	17.95	17.95	17.96	17.95	17.96	17.95	17.96	17.95	17.88	17.83	17.84	15.47																															
Range of trigger angle	 Move back by 5 degree, until close mode is reobtained.																																													
240	Degree	360	355	350	345	340	335	330	325	320	315	310	305	300					250	245	240	235	230	225	220	215	210	205	200	195																
	Power																		17.95	15.47																										
	<C> Open the screen in 1 degree steps until laptop mode is reobtained and continue opening the screen in 1 degree steps at least 5 degrees.																																													
	Degree	360	359	358	357	356	355	354	353	352	351	350	349	348					245	244	243	242	241	240	239	238	237	236	235	234	233	232	231	230	229	228	227	226								
	Power																		17.95	17.96	17.95	17.95	17.95	15.42	15.45	15.47	15.45	15.41	15.42																	
	<D> Then continue opening the screen in 10 degree steps until Close mode is obtained.																																													
	Degree	360	350	340	330	320	310	300	290	280	270	260	250					15.48	15.47	15.46	15.42	15.45	15.41	15.43	15.41	16.0	15.50	14.0	13.0	12.0	11.0	10.0	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.0	1.0	0				
	Power																	15.48	15.47	15.46	15.42	15.45	15.41	15.43	15.41	15.40	15.38	15.47	15.45	15.43	15.47	15.32	15.41	15.45	15.42	15.32	15.38	15.41	15.42							