

System Check_Head_2450MHz

DUT: D2450V2-929

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_230307 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.827$ S/m; $\epsilon_r = 39.653$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.58, 7.58, 7.58) @ 2450 MHz; Calibrated: 2022/10/31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/12/15
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2055
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.50 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.62 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 5.40 W/kg

SAR(1 g) = 2.77 W/kg; SAR(10 g) = 1.34 W/kg

Maximum value of SAR (measured) = 4.47 W/kg

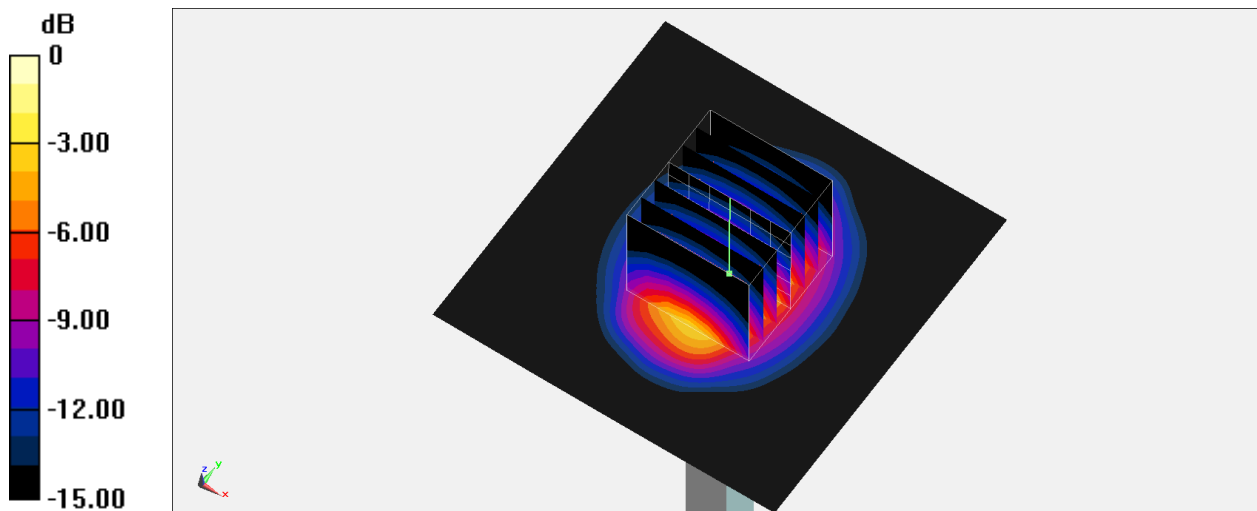

0 dB = 4.47 W/kg = 6.50 dBW/kg

System Check_Head_2450MHz

DUT: D2450V2-736

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_230317 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.789$ S/m; $\epsilon_r = 38.384$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.74, 7.74, 7.74) @ 2450 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2022/12/15
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.21 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.20 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 5.27 W/kg

SAR(1 g) = 2.54 W/kg; SAR(10 g) = 1.18 W/kg

Maximum value of SAR (measured) = 4.24 W/kg

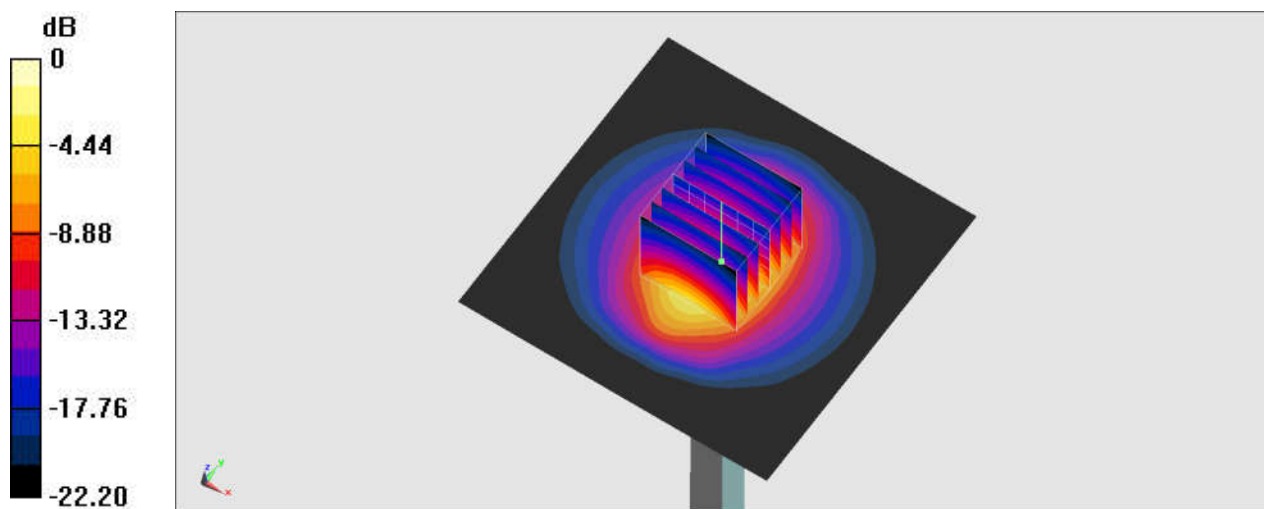

0 dB = 4.24 W/kg = 6.27 dBW/kg

System Check_Head_2450MHz

DUT: D2450V2-929

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_230322 Medium parameters used : $f = 2450$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 39.443$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.74, 7.74, 7.74) @ 2450 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2022/12/15
- Phantom: ELI V4.0; Type: QD OVA 001 Bx; Serial: 1029
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.11 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 49.44 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 5.10 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.15 W/kg

Maximum value of SAR (measured) = 4.13 W/kg

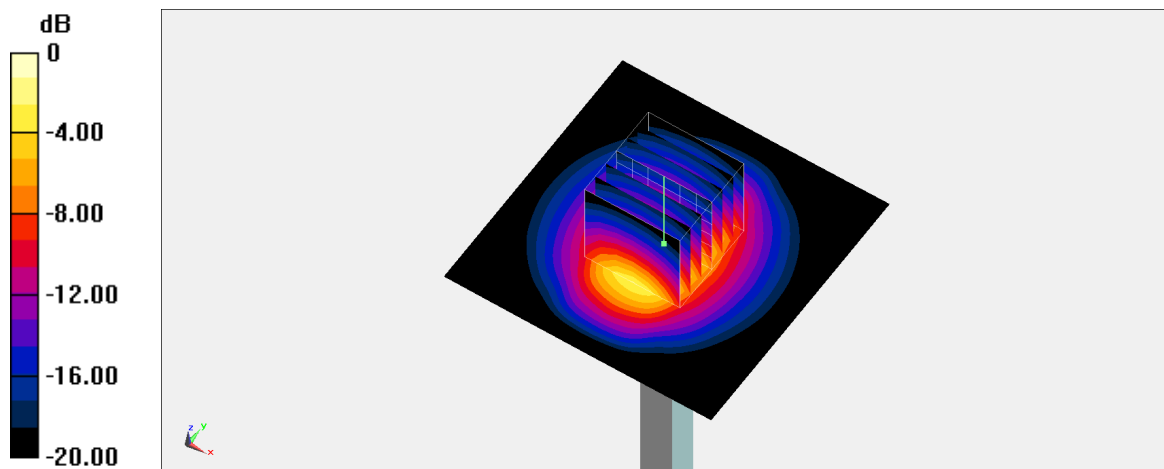

0 dB = 4.11 W/kg = 6.14 dBW/kg

System Check_Head_5250MHz

DUT: D5GHzV2-1006

Communication System: CW ; Frequency: 5250 MHz;Duty Cycle: 1:1

Medium: HSL_5G_230307 Medium parameters used : $f = 5250$ MHz; $\sigma = 4.812$ S/m; $\epsilon_r = 36.907$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.48, 5.48, 5.48) @ 5250 MHz; Calibrated: 2023/1/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2022/9/21
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 11.0 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 28.67 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 4.38 W/kg; SAR(10 g) = 1.24 W/kg

Maximum value of SAR (measured) = 11.0 W/kg

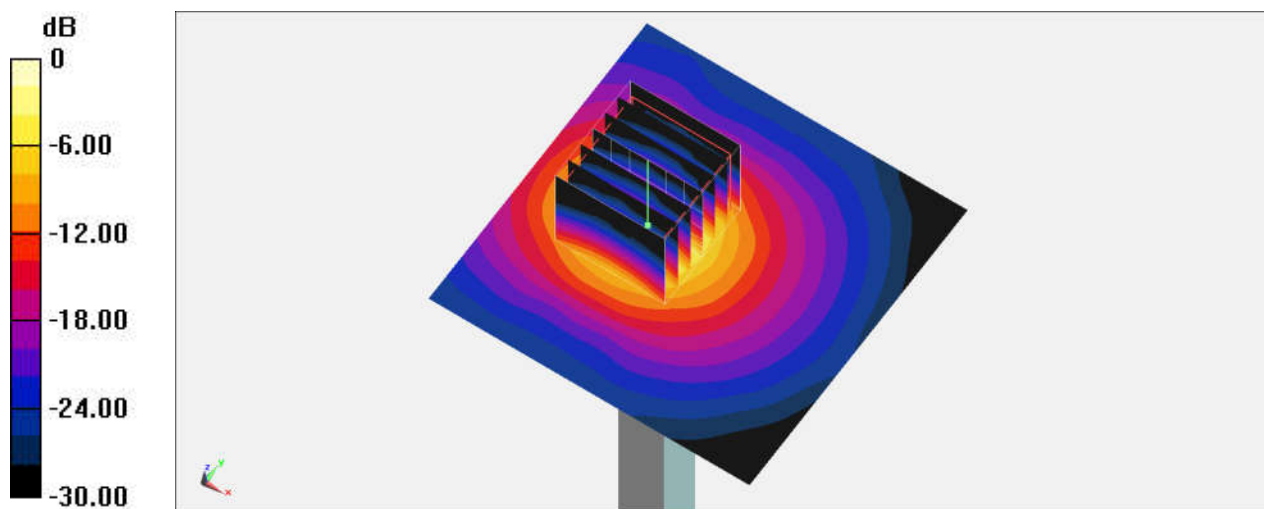

0 dB = 11.0 W/kg = 10.41 dBW/kg

System Check_Head_5250MHz

DUT: D5GHzV2-1171

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL_5G_230318 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.819$ S/m; $\epsilon_r = 36.989$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.28, 5.28, 5.28) @ 5250 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2022/12/15
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.6 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 53.14 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 4.27 W/kg; SAR(10 g) = 1.22 W/kg

Maximum value of SAR (measured) = 10.8 W/kg

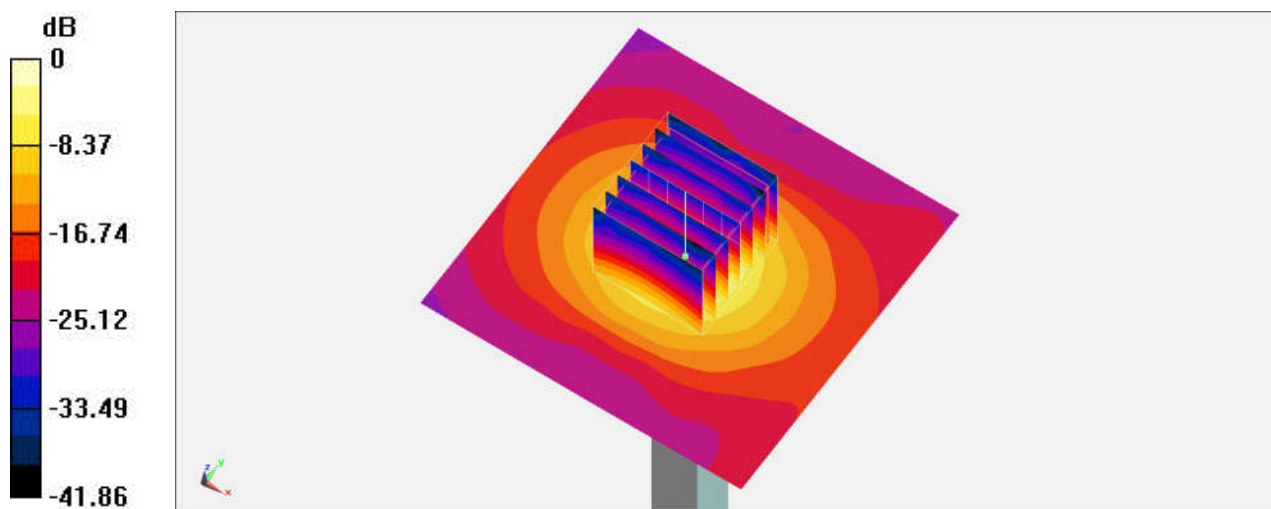

0 dB = 10.6 W/kg = 10.24 dBW/kg

System Check_Head_5600MHz

DUT: D5GHzV2-1006

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL_5G_230307 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.215$ S/m; $\epsilon_r = 36.36$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(4.81, 4.81, 4.81) @ 5600 MHz; Calibrated: 2023/1/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2022/9/21
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.3 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 50.58 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 4.14 W/kg; SAR(10 g) = 1.18 W/kg

Maximum value of SAR (measured) = 10.7 W/kg

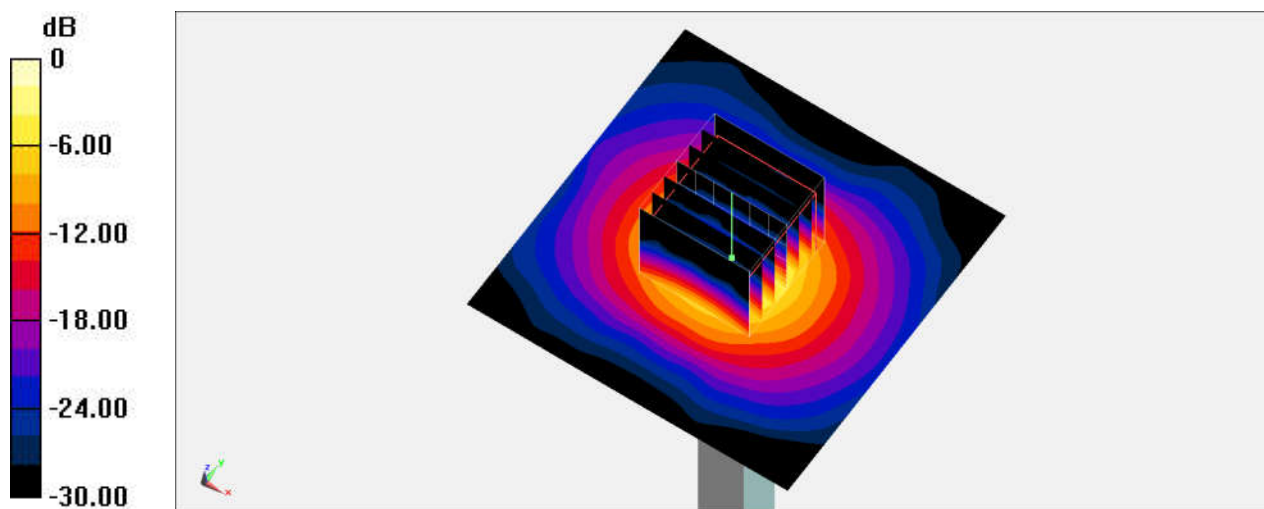

0 dB = 10.7 W/kg = 10.29 dBW/kg

System Check_Head_5600MHz

DUT: D5GHzV2-1006

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL_5G_230318 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.197$ S/m; $\epsilon_r = 36.479$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.66, 4.66, 4.66) @ 5600 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2022/12/15
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 11.5 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 53.37 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 19.8 W/kg

SAR(1 g) = 4.63 W/kg; SAR(10 g) = 1.3 W/kg

Maximum value of SAR (measured) = 12.1 W/kg

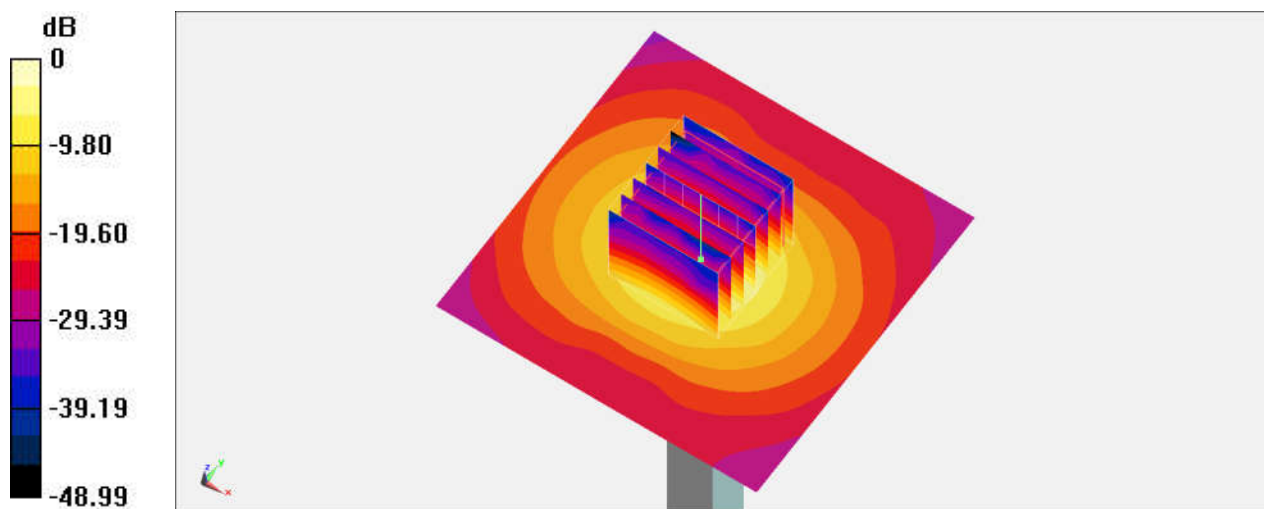

0 dB = 11.5 W/kg = 10.61 dBW/kg

System Check_Head_5750MHz

DUT: D5GHzV2-1006

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL_5G_230307 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.373$ S/m; $\epsilon_r = 36.167$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(4.97, 4.97, 4.97) @ 5750 MHz; Calibrated: 2023/1/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2022/9/21
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.79 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 48.11 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 3.84 W/kg; SAR(10 g) = 1.09 W/kg

Maximum value of SAR (measured) = 10.1 W/kg

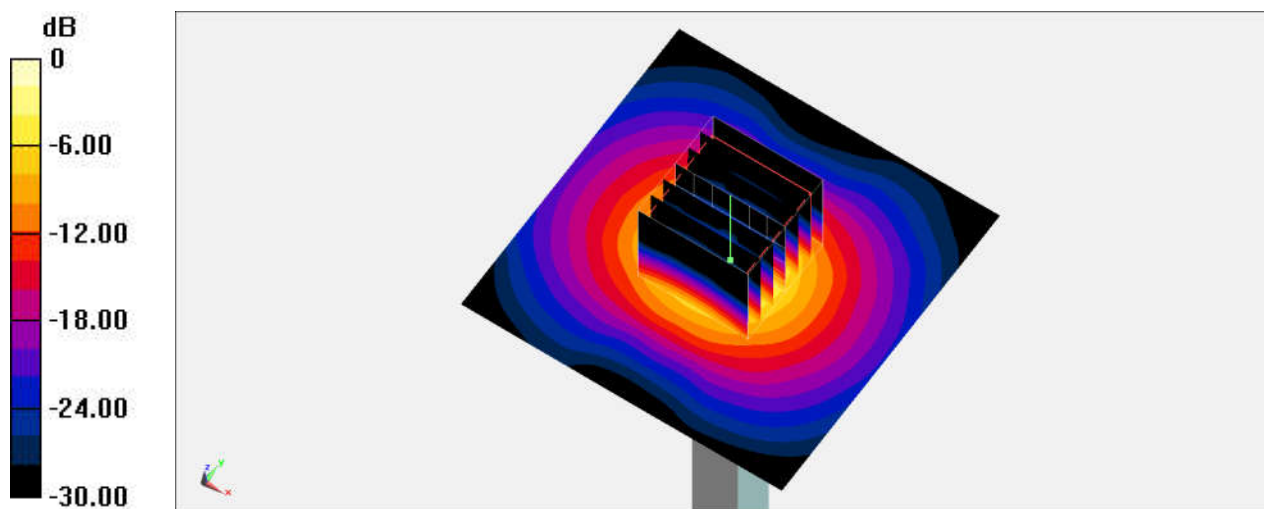

0 dB = 10.1 W/kg = 10.04 dBW/kg

System Check_Head_5750MHz

DUT: D5GHzV2-1171

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL_5G_230318 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.367$ S/m; $\epsilon_r = 36.295$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.86, 4.86, 4.86) @ 5750 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2022/12/15
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.4 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.20 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 4.17 W/kg; SAR(10 g) = 1.19 W/kg

Maximum value of SAR (measured) = 11.0 W/kg

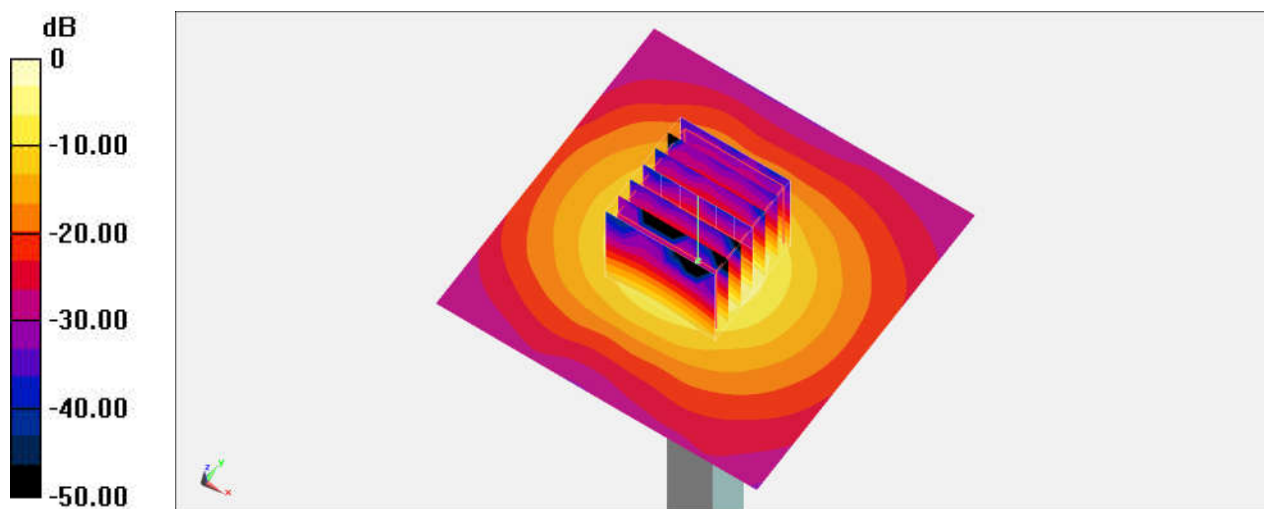

0 dB = 10.4 W/kg = 10.17 dBW/kg

System Check_Head_5750MHz

DUT: D5GHzV2-1171

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL_5G_230323 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.464$ S/m; $\epsilon_r = 36.558$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.87, 4.87, 4.87) @ 5750 MHz; Calibrated: 2023/2/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2023/2/22
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2055
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 20.5 W/kg


Pin=100mW/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.70 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 37.4 W/kg

SAR(1 g) = 8.41 W/kg; SAR(10 g) = 2.4 W/kg

Maximum value of SAR (measured) = 21.6 W/kg

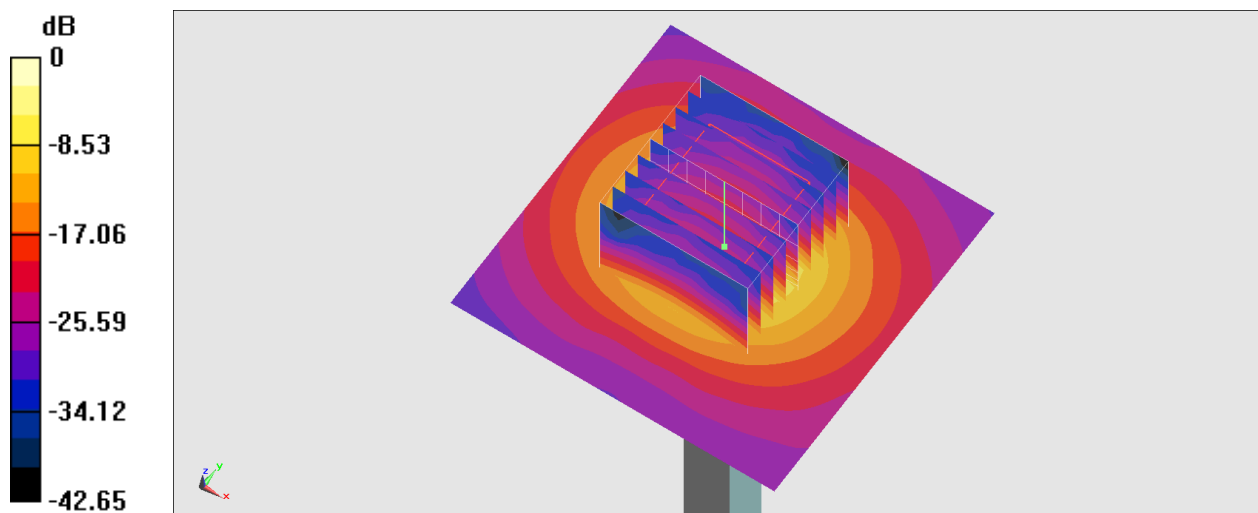

0 dB = 21.6 W/kg = 13.34 dBW/kg

System Check_Head_5850MHz

DUT: D5GHzV2-1171

Communication System: CW; Frequency: 5850 MHz; Duty Cycle: 1:1

Medium: HSL_5G_230307 Medium parameters used : $f = 5850$ MHz; $\sigma = 5.499$ S/m; $\epsilon_r = 36.033$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.95, 4.95, 4.95) @ 5850 MHz; Calibrated: 2023/1/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2023/1/23
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 24.0 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.19 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 43.8 W/kg

SAR(1 g) = 8.6 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 23.4 W/kg

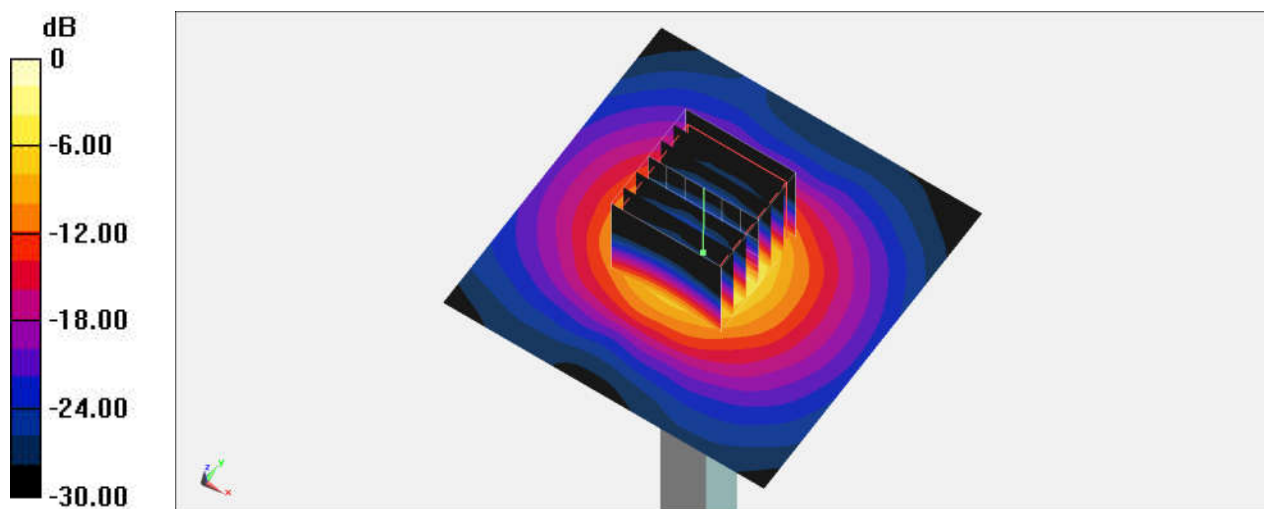

0 dB = 23.4 W/kg = 13.69 dBW/kg

System Check_Head_5850MHz

DUT: D5GHzV2-1171

Communication System: CW; Frequency: 5850 MHz; Duty Cycle: 1:1

Medium: HSL_5G_230321 Medium parameters used: $f = 5850$ MHz; $\sigma = 5.529$ S/m; $\epsilon_r = 36.433$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.95, 4.95, 4.95) @ 5850 MHz; Calibrated: 2023/1/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2023/1/23
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 24.2 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.19 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 44.0 W/kg

SAR(1 g) = 8.65 W/kg; SAR(10 g) = 2.42 W/kg

Maximum value of SAR (measured) = 23.6 W/kg

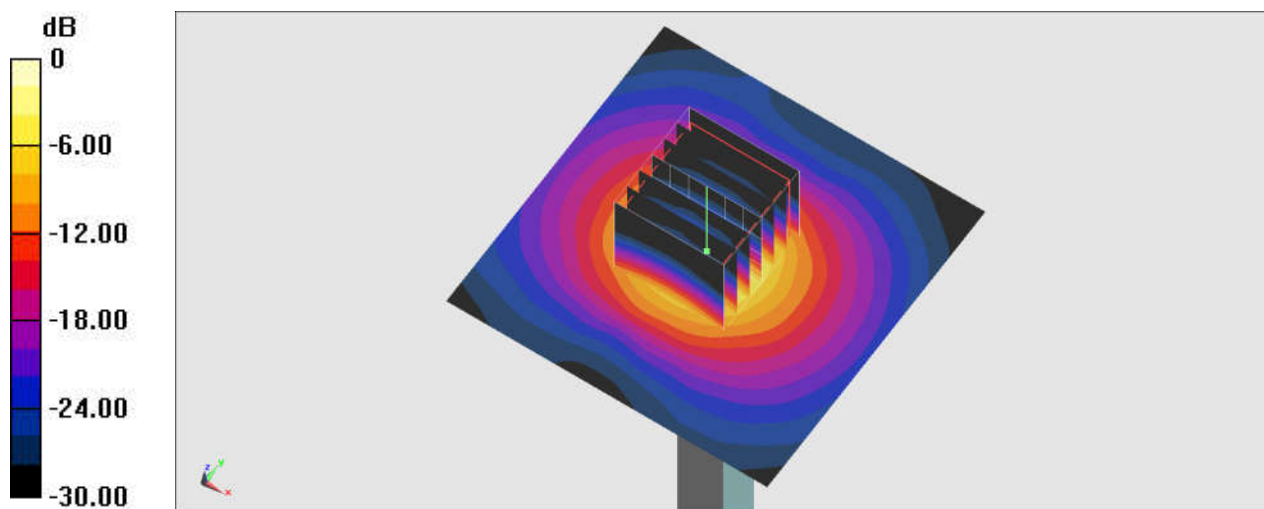

0 dB = 23.6 W/kg = 13.73 dBW/kg

System Check_Head_6500MHz

D6.5GHzV2-1083


Communication System: CW; Frequency: 6500.0 MHz; Duty Cycle: 1:1
Medium: HSL_6G_230308 Medium parameters used: $f = 6500.0$ MHz; $\sigma = 6.15$ S/m; $\epsilon_r = 34.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.5, 5.5, 5.5); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn316; Calibrated: 2023-01-23
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1227; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: CW

Pin=100mW/Area Scan (136.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm
SAR (1g) = 23.2 W/kg; SAR (10g) = 5.11 W/kg;

Pin=100mW/Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = 0.17 dB
SAR (1g) = 31.3 W/kg; SAR (8g) = 7.09 W/kg; SAR (10g) = 5.84 W/kg
psAPD (1.0cm², sq) = 313 [W/m²]; psAPD (4.0cm², sq) = 142 [W/m²]

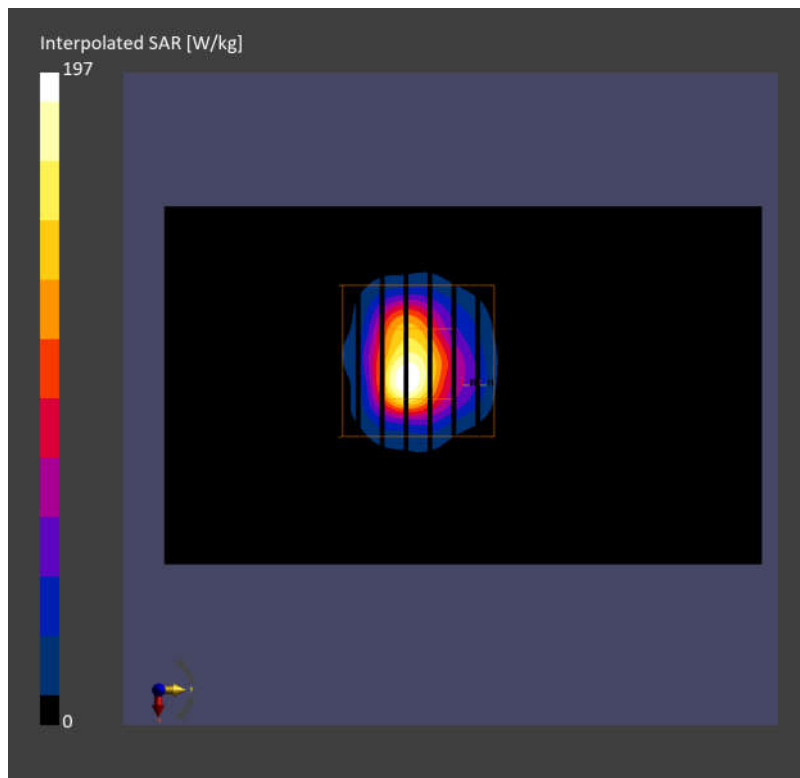

System Check_Head_6500MHz

DUT: D6.5GHzV2 - SN1083

Communication System: CW; Frequency: 6500.0 MHz; Duty Cycle: 1:1

Medium: HSL_6500_230323 Medium parameters used: $f = 6500.0$ MHz; $\sigma = 6.06$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(5.8, 5.8, 5.8); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2023-02-22
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: CW

Pin=100mW/Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 23.4 W/kg; SAR (10g) = 5.00 W/kg;

Pin=100mW/Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 29.0 W/kg; SAR (8g) = 6.54 W/kg; SAR (10g) = 5.34 W/kg

psAPD (1.0cm², sq) = 290 [W/m²]; psAPD (4.0cm², sq) = 131 [W/m²]

