


RF Mode	802.11ax (HE80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.3 PK			2.35 V	79	106.3	3.0
2	*6385.00	100.6 AV			2.35 V	79	97.6	3.0
3	#12770.00	55.5 PK	88.2	-32.7	1.01 V	229	45.1	10.4
4	#12770.00	43.1 AV	68.2	-25.1	1.01 V	229	32.7	10.4
5	19155.00	57.8 PK	74.0	-16.2	2.41 V	299	64.1	-6.3
6	19155.00	46.5 AV	54.0	-7.5	2.41 V	299	52.8	-6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

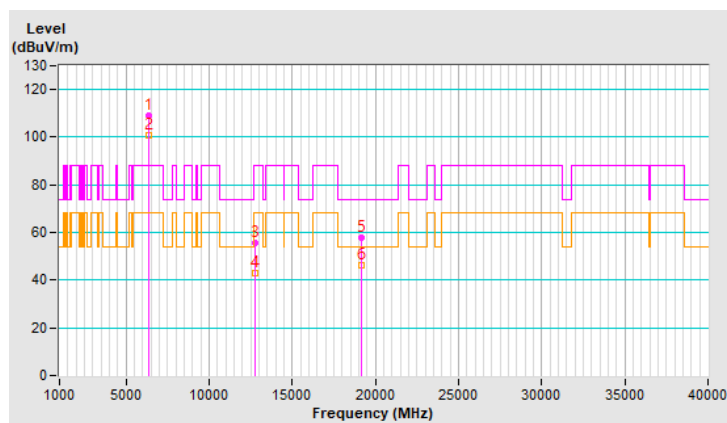


RF Mode	802.11ax (HE80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.3 PK			1.93 H	97	106.5	3.8
2	*6625.00	100.1 AV			1.93 H	97	96.3	3.8
3	13250.00	53.5 PK	74.0	-20.5	2.19 H	126	42.1	11.4
4	13250.00	42.7 AV	54.0	-11.3	2.19 H	126	31.3	11.4
5	19875.00	54.6 PK	74.0	-19.4	1.64 H	73	60.5	-5.9
6	19875.00	43.6 AV	54.0	-10.4	1.64 H	73	49.5	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

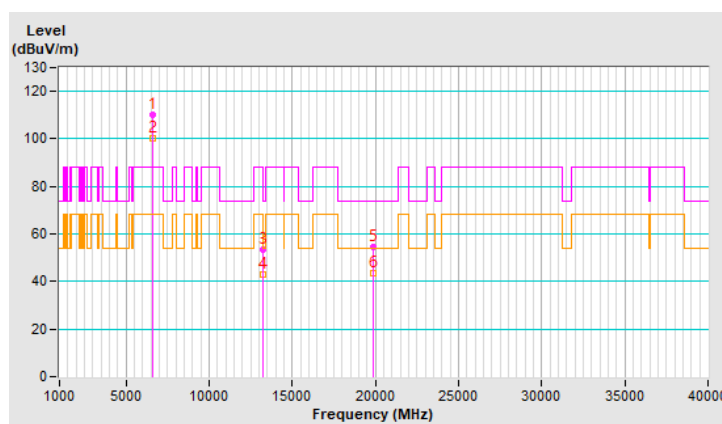


RF Mode	802.11ax (HE80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.2 PK			2.36 V	89	106.4	3.8
2	*6625.00	101.2 AV			2.36 V	89	97.4	3.8
3	13250.00	55.2 PK	74.0	-18.8	1.12 V	226	43.8	11.4
4	13250.00	43.0 AV	54.0	-11.0	1.12 V	226	31.6	11.4
5	19875.00	58.2 PK	74.0	-15.8	2.38 V	271	64.1	-5.9
6	19875.00	46.5 AV	54.0	-7.5	2.38 V	271	52.4	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

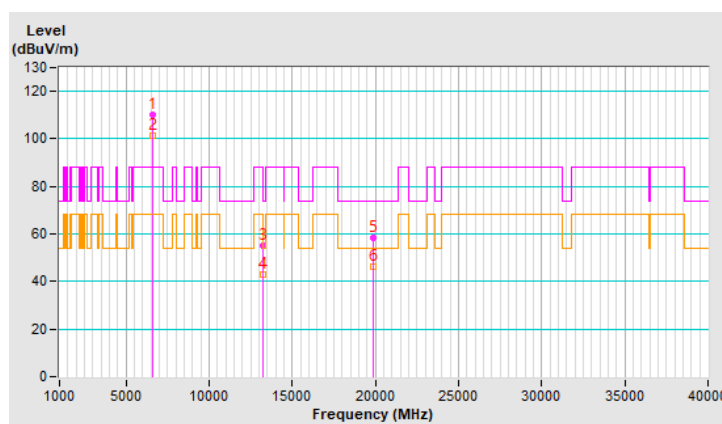


RF Mode	802.11ax (HE80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.2 PK			1.81 H	87	106.4	3.8
2	*6705.00	100.0 AV			1.81 H	87	96.2	3.8
3	#13410.00	53.0 PK	88.2	-35.2	2.12 H	130	40.8	12.2
4	#13410.00	42.6 AV	68.2	-25.6	2.12 H	130	30.4	12.2
5	20115.00	54.7 PK	74.0	-19.3	1.75 H	111	60.1	-5.4
6	20115.00	43.9 AV	54.0	-10.1	1.75 H	111	49.3	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

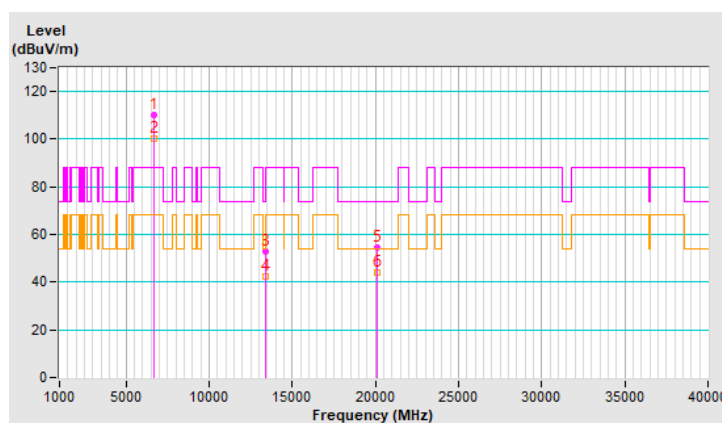


RF Mode	802.11ax (HE80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.9 PK			2.29 V	72	106.1	3.8
2	*6705.00	101.1 AV			2.29 V	72	97.3	3.8
3	#13410.00	56.0 PK	88.2	-32.2	1.00 V	206	43.8	12.2
4	#13410.00	43.6 AV	68.2	-24.6	1.00 V	206	31.4	12.2
5	20115.00	58.7 PK	74.0	-15.3	2.32 V	299	64.1	-5.4
6	20115.00	47.1 AV	54.0	-6.9	2.32 V	299	52.5	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

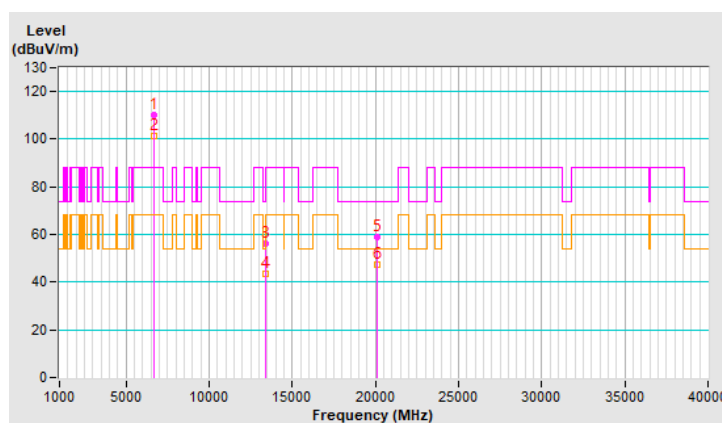


RF Mode	802.11ax (HE80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.4 PK			1.86 H	80	106.5	3.9
2	*6785.00	100.4 AV			1.86 H	80	96.5	3.9
3	#13570.00	52.2 PK	88.2	-36.0	2.23 H	135	39.6	12.6
4	#13570.00	41.8 AV	68.2	-26.4	2.23 H	135	29.2	12.6
5	20355.00	55.5 PK	74.0	-18.5	1.68 H	110	60.8	-5.3
6	20355.00	44.7 AV	54.0	-9.3	1.68 H	110	50.0	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

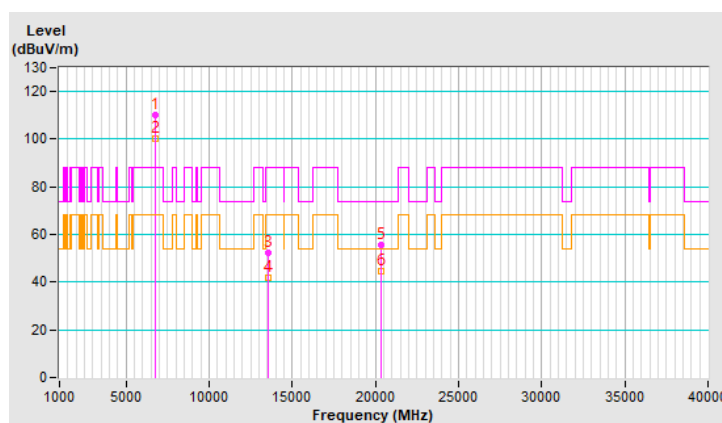


RF Mode	802.11ax (HE80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.9 PK			2.25 V	87	106.0	3.9
2	*6785.00	101.0 AV			2.25 V	87	97.1	3.9
3	#13570.00	56.2 PK	88.2	-32.0	1.00 V	227	43.6	12.6
4	#13570.00	43.9 AV	68.2	-24.3	1.00 V	227	31.3	12.6
5	20355.00	58.4 PK	74.0	-15.6	2.34 V	314	63.7	-5.3
6	20355.00	46.8 AV	54.0	-7.2	2.34 V	314	52.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

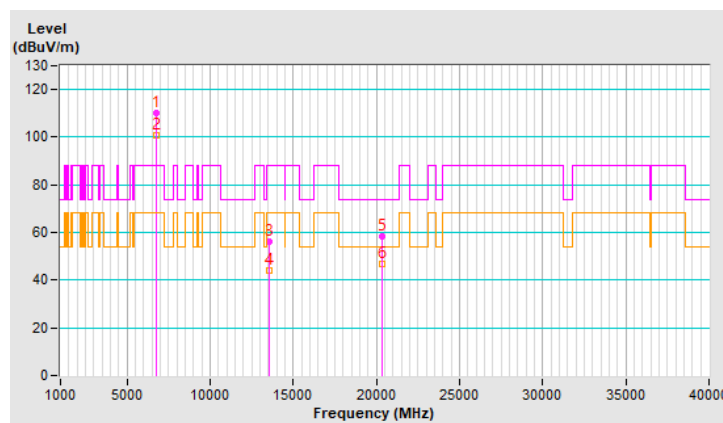


1T1S

RF Mode	802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5908.60	80.7 PK	88.2	-7.5	1.91 H	87	79.4	1.3
2	#5908.60	66.0 AV	68.2	-2.2	1.91 H	87	64.7	1.3
3	#5925.00	77.3 PK	88.2	-10.9	1.91 H	87	75.8	1.5
4	#5925.00	67.7 AV	68.2	-0.5	1.91 H	87	66.2	1.5
5	*6025.00	106.5 PK			1.91 H	87	104.7	1.8
6	*6025.00	97.0 AV			1.91 H	87	95.2	1.8
7	12050.00	50.4 PK	74.0	-23.6	1.90 H	119	39.4	11.0
8	12050.00	41.5 AV	54.0	-12.5	1.90 H	119	30.5	11.0
9	18075.00	57.4 PK	74.0	-16.6	1.56 H	132	51.0	6.4
10	18075.00	45.7 AV	54.0	-8.3	1.56 H	132	39.3	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

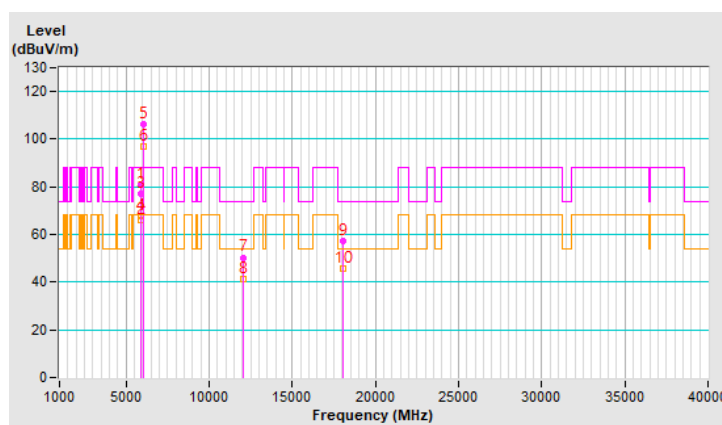


RF Mode	802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5917.20	67.8 PK	88.2	-20.4	2.00 V	29	66.3	1.5
2	#5917.20	60.2 AV	68.2	-8.0	2.00 V	29	58.7	1.5
3	#5922.30	74.9 PK	88.2	-13.3	2.00 V	29	73.4	1.5
4	#5922.30	60.7 AV	68.2	-7.5	2.00 V	29	59.2	1.5
5	*6025.00	101.0 PK			2.00 V	29	99.2	1.8
6	*6025.00	91.4 AV			2.00 V	29	89.6	1.8
7	12050.00	50.4 PK	74.0	-23.6	1.44 V	176	39.4	11.0
8	12050.00	40.6 AV	54.0	-13.4	1.44 V	176	29.6	11.0
9	18075.00	58.1 PK	74.0	-15.9	2.60 V	331	51.7	6.4
10	18075.00	45.9 AV	54.0	-8.1	2.60 V	331	39.5	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

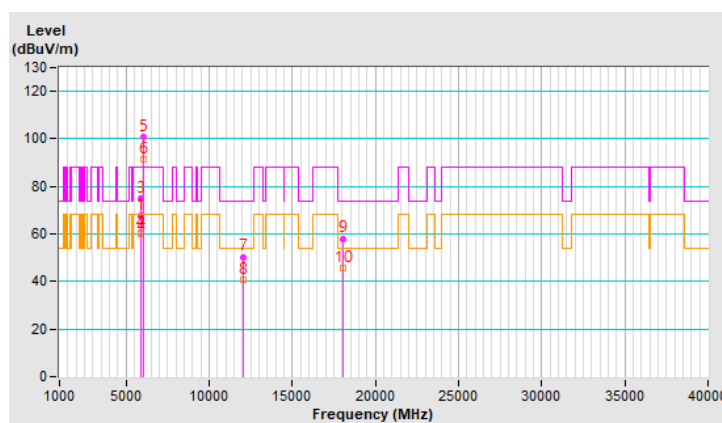


RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	110.3 PK			1.91 H	91	108.3	2.0
2	*6185.00	100.1 AV			1.91 H	91	98.1	2.0
3	12370.00	50.9 PK	74.0	-23.1	1.95 H	113	40.8	10.1
4	12370.00	41.8 AV	54.0	-12.2	1.95 H	113	31.7	10.1
5	18555.00	57.4 PK	74.0	-16.6	1.60 H	133	63.9	-6.5
6	18555.00	45.7 AV	54.0	-8.3	1.60 H	133	52.2	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

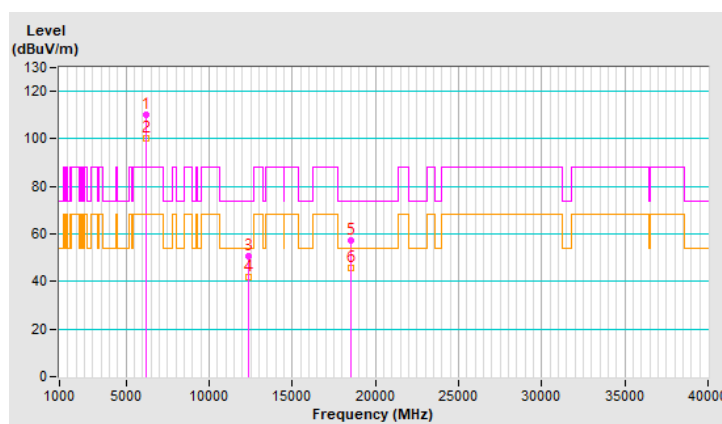


RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	103.7 PK			2.00 V	39	101.7	2.0
2	*6185.00	93.5 AV			2.00 V	39	91.5	2.0
3	12370.00	49.4 PK	74.0	-24.6	1.37 V	210	39.3	10.1
4	12370.00	40.2 AV	54.0	-13.8	1.37 V	210	30.1	10.1
5	18555.00	56.4 PK	74.0	-17.6	2.52 V	305	62.9	-6.5
6	18555.00	44.5 AV	54.0	-9.5	2.52 V	305	51.0	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

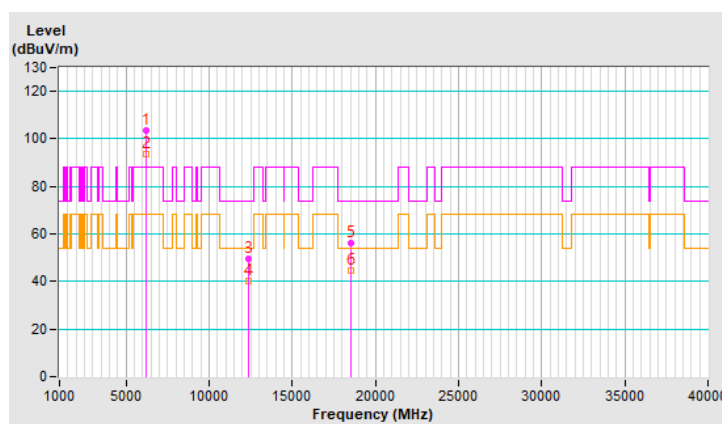


RF Mode	802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	109.9 PK			1.85 H	78	107.0	2.9
2	*6345.00	100.9 AV			1.85 H	78	98.0	2.9
3	12690.00	50.6 PK	74.0	-23.4	1.92 H	116	40.4	10.2
4	12690.00	41.8 AV	54.0	-12.2	1.92 H	116	31.6	10.2
5	19035.00	57.7 PK	74.0	-16.3	1.59 H	132	64.2	-6.5
6	19035.00	46.0 AV	54.0	-8.0	1.59 H	132	52.5	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

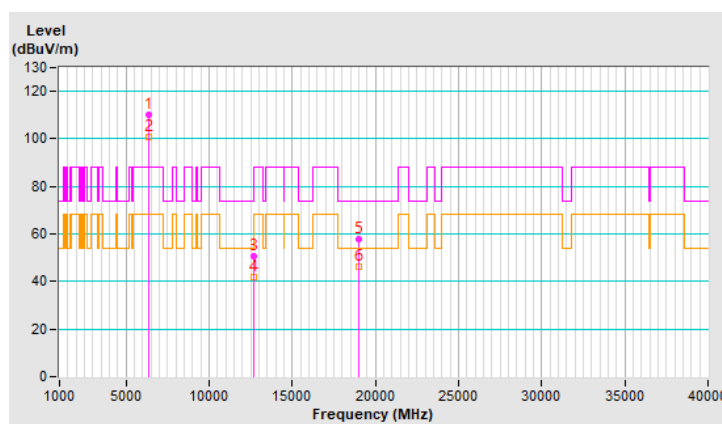


RF Mode	802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	103.9 PK			1.98 V	39	101.0	2.9
2	*6345.00	93.5 AV			1.98 V	39	90.6	2.9
3	12690.00	49.6 PK	74.0	-24.4	1.42 V	226	39.4	10.2
4	12690.00	40.6 AV	54.0	-13.4	1.42 V	226	30.4	10.2
5	19035.00	56.5 PK	74.0	-17.5	2.51 V	316	63.0	-6.5
6	19035.00	44.6 AV	54.0	-9.4	2.51 V	316	51.1	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

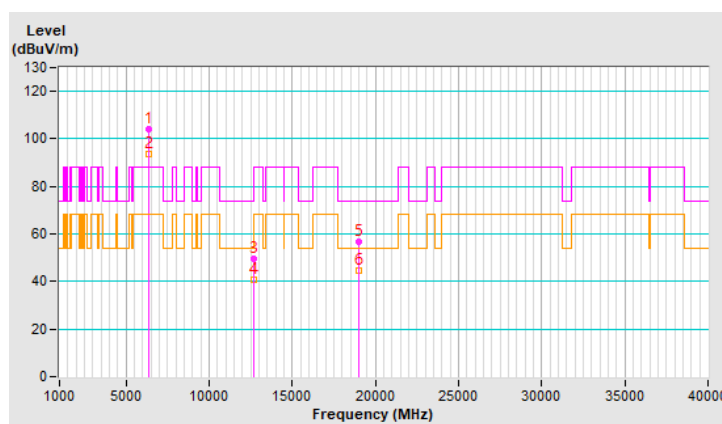


RF Mode	802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.3 PK			1.92 H	108	106.5	3.8
2	*6665.00	101.9 AV			1.92 H	108	98.1	3.8
3	13330.00	50.7 PK	74.0	-23.3	1.90 H	112	38.9	11.8
4	13330.00	41.5 AV	54.0	-12.5	1.90 H	112	29.7	11.8
5	19995.00	57.3 PK	74.0	-16.7	1.60 H	124	62.9	-5.6
6	19995.00	45.6 AV	54.0	-8.4	1.60 H	124	51.2	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

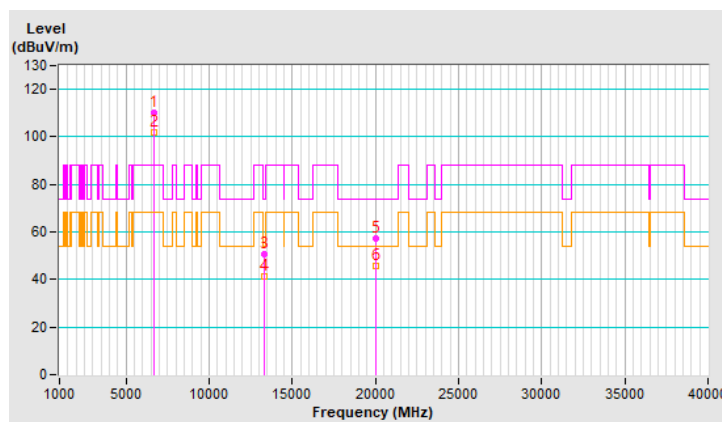


RF Mode	802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.6 PK			2.47 V	82	99.8	3.8
2	*6665.00	93.2 AV			2.47 V	82	89.4	3.8
3	13330.00	48.8 PK	74.0	-25.2	1.32 V	196	37.0	11.8
4	13330.00	39.9 AV	54.0	-14.1	1.32 V	196	28.1	11.8
5	19995.00	56.3 PK	74.0	-17.7	2.52 V	306	61.9	-5.6
6	19995.00	44.7 AV	54.0	-9.3	2.52 V	306	50.3	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

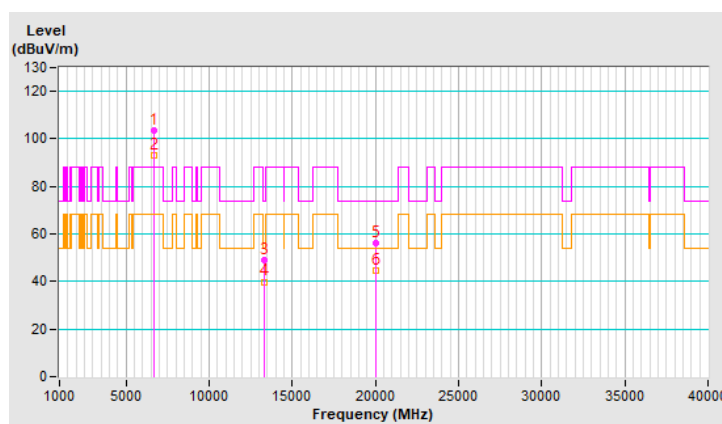


2T1S

RF Mode	802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5889.70	79.5 PK	88.2	-8.7	1.91 H	88	78.2	1.3
2	#5889.70	61.2 AV	68.2	-7.0	1.91 H	88	59.9	1.3
3	#5925.00	70.7 PK	88.2	-17.5	1.91 H	88	69.2	1.5
4	#5925.00	61.3 AV	68.2	-6.9	1.91 H	88	59.8	1.5
5	*6025.00	104.3 PK			1.91 H	88	102.5	1.8
6	*6025.00	94.7 AV			1.91 H	88	92.9	1.8
7	12050.00	51.7 PK	74.0	-22.3	2.13 H	132	40.7	11.0
8	12050.00	39.6 AV	54.0	-14.4	2.13 H	132	28.6	11.0
9	18075.00	53.0 PK	74.0	-21.0	1.78 H	84	46.6	6.4
10	18075.00	41.5 AV	54.0	-12.5	1.78 H	84	35.1	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

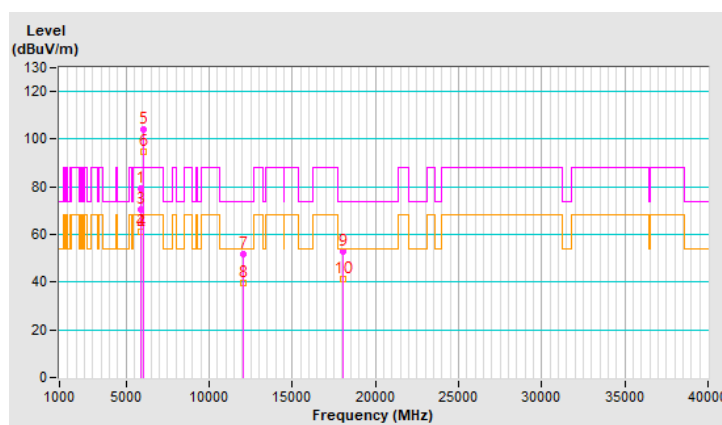


RF Mode	802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5910.50	80.8 PK	88.2	-7.4	2.12 V	96	79.5	1.3
2	#5910.50	66.1 AV	68.2	-2.1	2.12 V	96	64.8	1.3
3	#5925.00	75.3 PK	88.2	-12.9	2.12 V	96	73.8	1.5
4	#5925.00	67.6 AV	68.2	-0.6	2.12 V	96	66.1	1.5
5	*6025.00	105.3 PK			2.12 V	96	103.5	1.8
6	*6025.00	95.4 AV			2.12 V	96	93.6	1.8
7	12050.00	51.7 PK	74.0	-22.3	1.02 V	216	40.7	11.0
8	12050.00	40.4 AV	54.0	-13.6	1.02 V	216	29.4	11.0
9	18075.00	55.1 PK	74.0	-18.9	2.25 V	258	48.7	6.4
10	18075.00	43.8 AV	54.0	-10.2	2.25 V	258	37.4	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

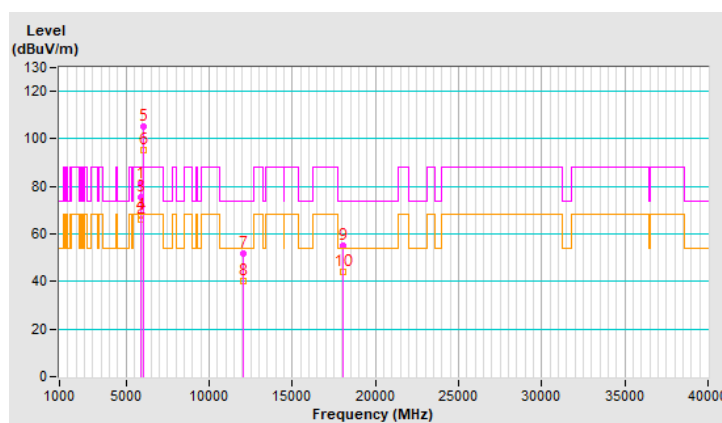


RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	104.4 PK			1.97 H	135	102.4	2.0
2	*6185.00	97.1 AV			1.97 H	135	95.1	2.0
3	12370.00	52.4 PK	74.0	-21.6	2.17 H	116	42.3	10.1
4	12370.00	40.9 AV	54.0	-13.1	2.17 H	116	30.8	10.1
5	18555.00	55.9 PK	74.0	-18.1	1.65 H	84	62.4	-6.5
6	18555.00	44.8 AV	54.0	-9.2	1.65 H	84	51.3	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

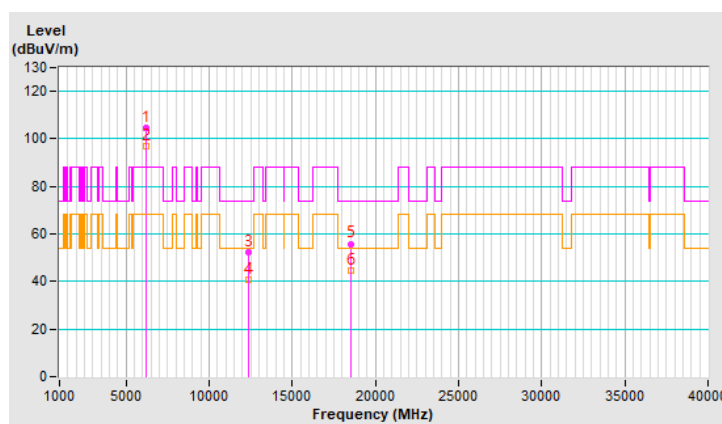


RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	106.0 PK			2.38 V	117	104.0	2.0
2	*6185.00	97.8 AV			2.38 V	117	95.8	2.0
3	12370.00	54.8 PK	74.0	-19.2	1.15 V	227	44.7	10.1
4	12370.00	42.4 AV	54.0	-11.6	1.15 V	227	32.3	10.1
5	18555.00	58.5 PK	74.0	-15.5	2.26 V	287	65.0	-6.5
6	18555.00	46.4 AV	54.0	-7.6	2.26 V	287	52.9	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

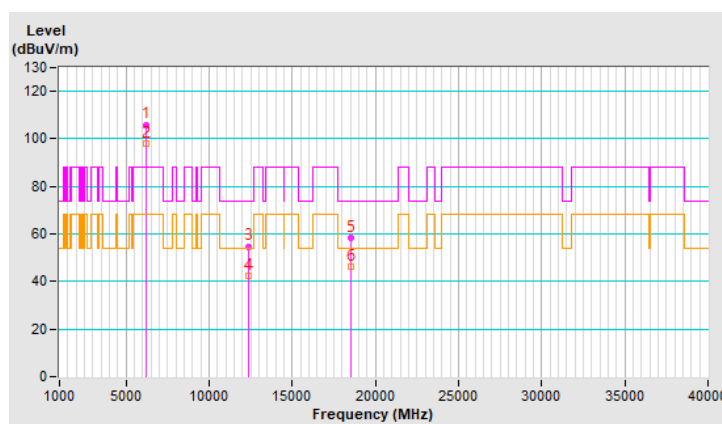


RF Mode	802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.3 PK			1.96 H	146	101.4	2.9
2	*6345.00	96.7 AV			1.96 H	146	93.8	2.9
3	12690.00	52.2 PK	74.0	-21.8	2.17 H	105	42.0	10.2
4	12690.00	40.9 AV	54.0	-13.1	2.17 H	105	30.7	10.2
5	19035.00	56.1 PK	74.0	-17.9	1.69 H	68	62.6	-6.5
6	19035.00	44.8 AV	54.0	-9.2	1.69 H	68	51.3	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

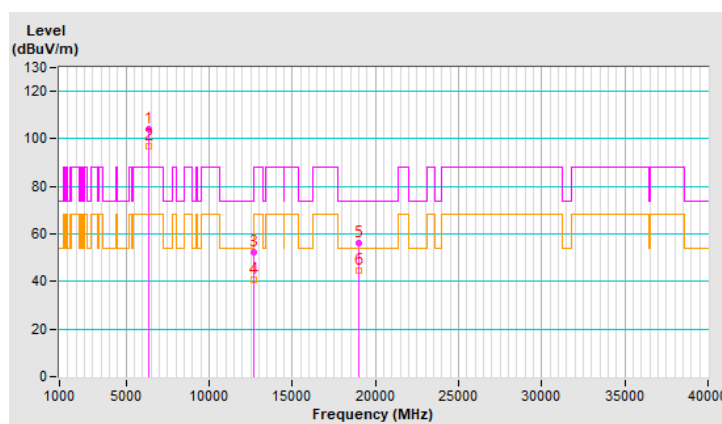


RF Mode	802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.3 PK			2.37 V	129	103.4	2.9
2	*6345.00	97.9 AV			2.37 V	129	95.0	2.9
3	12690.00	54.4 PK	74.0	-19.6	1.09 V	218	44.2	10.2
4	12690.00	42.0 AV	54.0	-12.0	1.09 V	218	31.8	10.2
5	19035.00	58.8 PK	74.0	-15.2	2.26 V	284	65.3	-6.5
6	19035.00	46.4 AV	54.0	-7.6	2.26 V	284	52.9	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

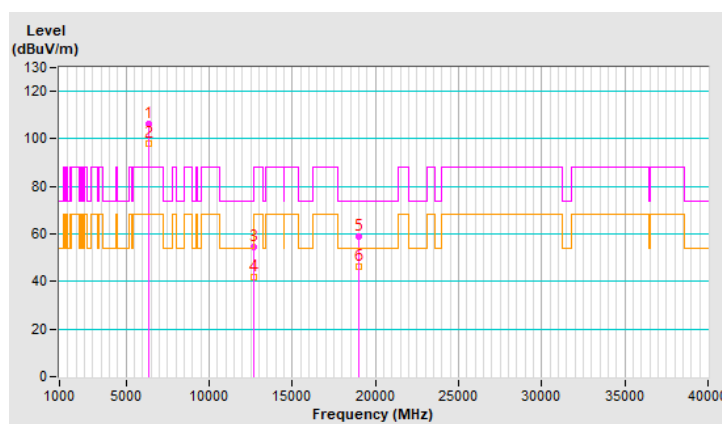


RF Mode	802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.2 PK			1.98 H	145	100.4	3.8
2	*6665.00	96.9 AV			1.98 H	145	93.1	3.8
3	13330.00	52.5 PK	74.0	-21.5	2.23 H	130	40.7	11.8
4	13330.00	41.2 AV	54.0	-12.8	2.23 H	130	29.4	11.8
5	19995.00	55.7 PK	74.0	-18.3	1.67 H	79	61.3	-5.6
6	19995.00	44.5 AV	54.0	-9.5	1.67 H	79	50.1	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

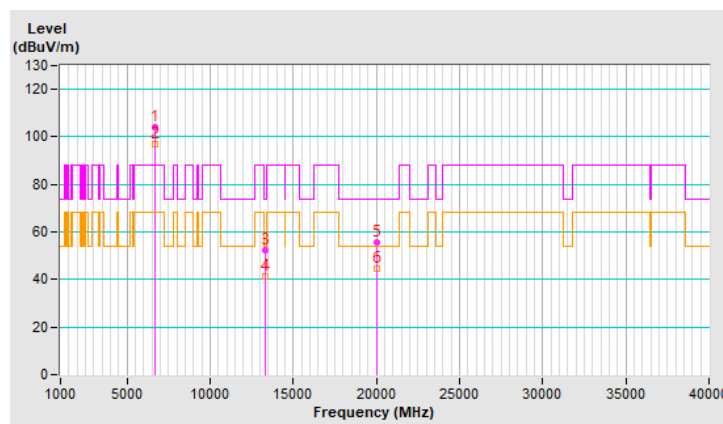


RF Mode	802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.4 PK			2.41 V	118	102.6	3.8
2	*6665.00	98.1 AV			2.41 V	118	94.3	3.8
3	13330.00	54.8 PK	74.0	-19.2	1.18 V	220	43.0	11.8
4	13330.00	42.1 AV	54.0	-11.9	1.18 V	220	30.3	11.8
5	19995.00	58.4 PK	74.0	-15.6	2.32 V	287	64.0	-5.6
6	19995.00	46.6 AV	54.0	-7.4	2.32 V	287	52.2	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

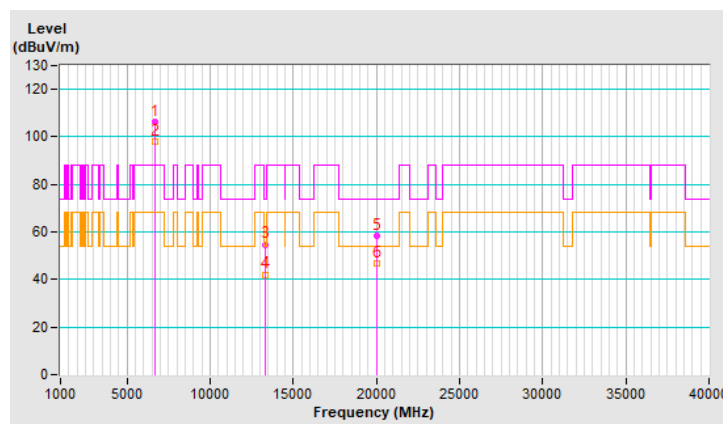


2T1S

RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5912.00	88.1 PK	88.2	-0.1	2.06 H	97	86.6	1.5
2	#5912.00	67.5 AV	68.2	-0.7	2.06 H	97	66.0	1.5
3	*5955.00	124.8 PK			2.06 H	97	123.2	1.6
4	*5955.00	115.9 AV			2.06 H	97	114.3	1.6
5	11910.00	63.0 PK	74.0	-11.0	1.99 H	232	51.9	11.1
6	11910.00	53.6 AV	54.0	-0.4	1.99 H	232	42.5	11.1
7	17865.00	54.1 PK	74.0	-19.9	1.62 H	81	32.0	22.1
8	17865.00	43.5 AV	54.0	-10.5	1.62 H	81	21.4	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

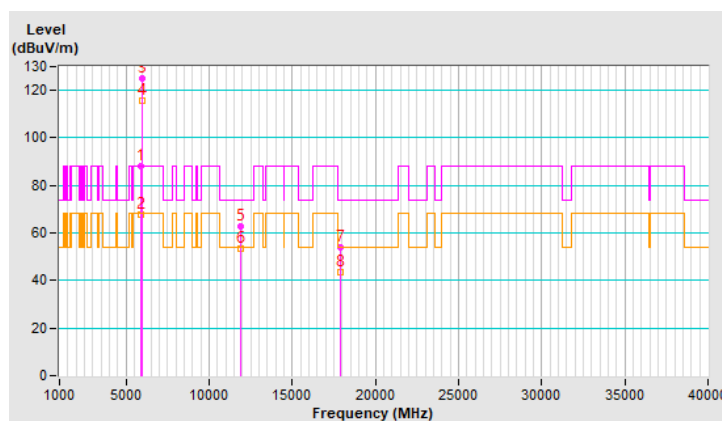


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5914.00	88.0 PK	88.2	-0.2	2.37 V	71	86.5	1.5
2	#5914.00	67.4 AV	68.2	-0.8	2.37 V	71	65.9	1.5
3	*5955.00	124.5 PK			2.37 V	71	122.9	1.6
4	*5955.00	115.3 AV			2.37 V	71	113.7	1.6
5	11910.00	59.1 PK	74.0	-14.9	1.95 V	201	48.0	11.1
6	11910.00	50.8 AV	54.0	-3.2	1.95 V	201	39.7	11.1
7	17865.00	59.3 PK	74.0	-14.7	2.35 V	254	37.2	22.1
8	17865.00	47.4 AV	54.0	-6.6	2.35 V	254	25.3	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

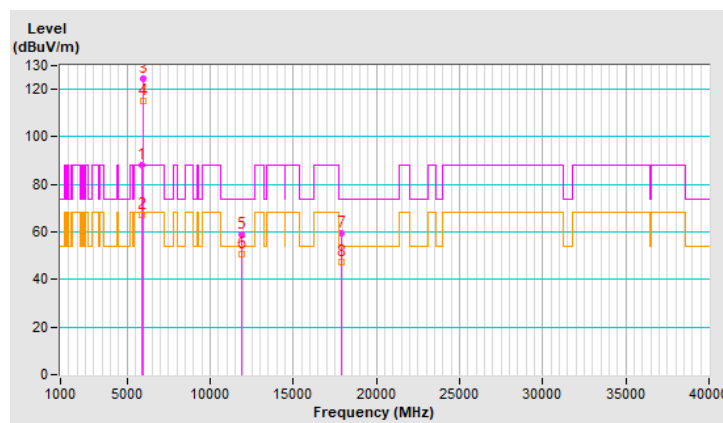


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	124.6 PK			2.10 H	99	121.6	3.0
2	*6415.00	115.6 AV			2.10 H	99	112.6	3.0
3	#12830.00	63.1 PK	88.2	-25.1	2.00 H	236	52.5	10.6
4	#12830.00	53.6 AV	68.2	-14.6	2.00 H	236	43.0	10.6
5	19245.00	53.4 PK	74.0	-20.6	1.65 H	83	59.8	-6.4
6	19245.00	43.1 AV	54.0	-10.9	1.65 H	83	49.5	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

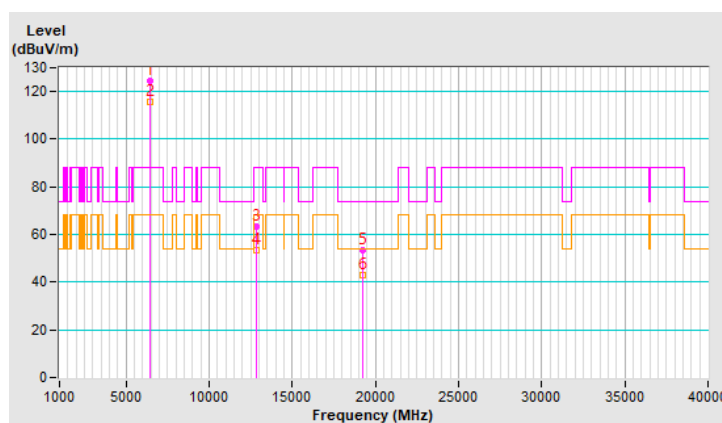


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	126.9 PK			2.40 V	87	123.9	3.0
2	*6415.00	117.4 AV			2.40 V	87	114.4	3.0
3	#12830.00	59.5 PK	88.2	-28.7	1.94 V	202	48.9	10.6
4	#12830.00	51.0 AV	68.2	-17.2	1.94 V	202	40.4	10.6
5	19245.00	59.0 PK	74.0	-15.0	2.38 V	252	65.4	-6.4
6	19245.00	47.0 AV	54.0	-7.0	2.38 V	252	53.4	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

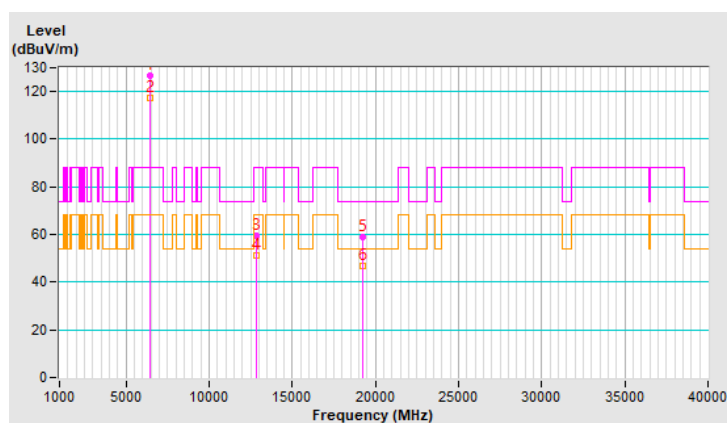


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	124.3 PK			2.04 H	82	120.7	3.6
2	*6535.00	115.4 AV			2.04 H	82	111.8	3.6
3	#13070.00	63.2 PK	88.2	-25.0	1.90 H	242	52.4	10.8
4	#13070.00	53.8 AV	68.2	-14.4	1.90 H	242	43.0	10.8
5	19605.00	53.5 PK	74.0	-20.5	1.60 H	69	59.5	-6.0
6	19605.00	43.1 AV	54.0	-10.9	1.60 H	69	49.1	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

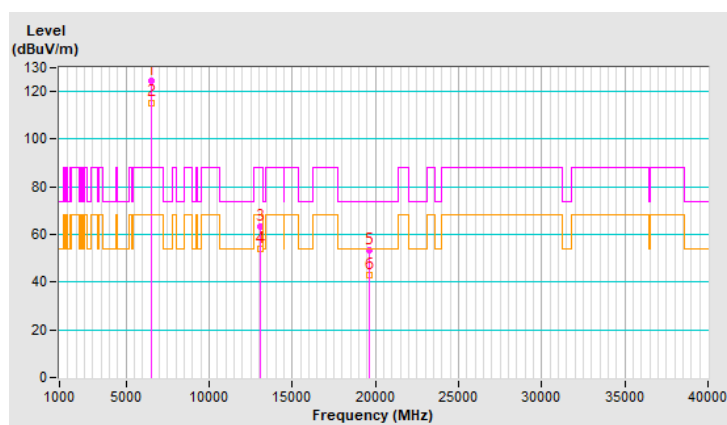


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	126.9 PK			2.36 V	83	123.3	3.6
2	*6535.00	119.4 AV			2.36 V	83	115.8	3.6
3	#13070.00	58.9 PK	88.2	-29.3	1.92 V	219	48.1	10.8
4	#13070.00	50.4 AV	68.2	-17.8	1.92 V	219	39.6	10.8
5	19605.00	59.2 PK	74.0	-14.8	2.38 V	258	65.2	-6.0
6	19605.00	47.0 AV	54.0	-7.0	2.38 V	258	53.0	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

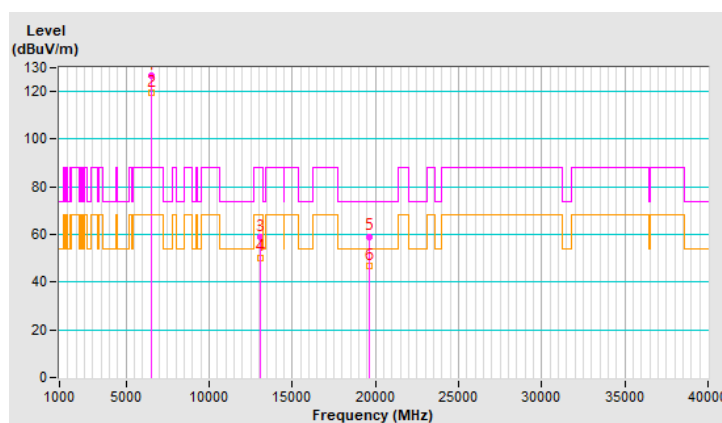


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	124.6 PK			2.08 H	97	120.5	4.1
2	*6855.00	115.8 AV			2.08 H	97	111.7	4.1
3	#13710.00	63.3 PK	88.2	-24.9	1.95 H	227	50.4	12.9
4	#13710.00	53.9 AV	68.2	-14.3	1.95 H	227	41.0	12.9
5	20565.00	54.5 PK	74.0	-19.5	1.64 H	90	59.3	-4.8
6	20565.00	43.6 AV	54.0	-10.4	1.64 H	90	48.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

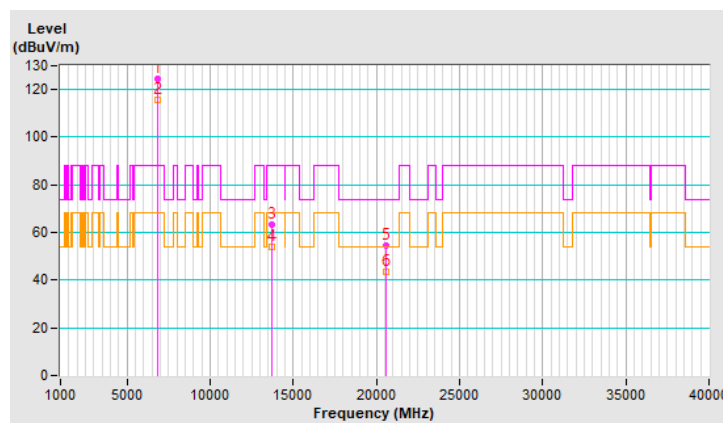


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	129.6 PK			2.36 V	84	125.5	4.1
2	*6855.00	121.8 AV			2.36 V	84	117.7	4.1
3	#13710.00	59.4 PK	88.2	-28.8	1.98 V	210	46.5	12.9
4	#13710.00	50.9 AV	68.2	-17.3	1.98 V	210	38.0	12.9
5	20565.00	59.7 PK	74.0	-14.3	2.38 V	241	64.5	-4.8
6	20565.00	47.9 AV	54.0	-6.1	2.38 V	241	52.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

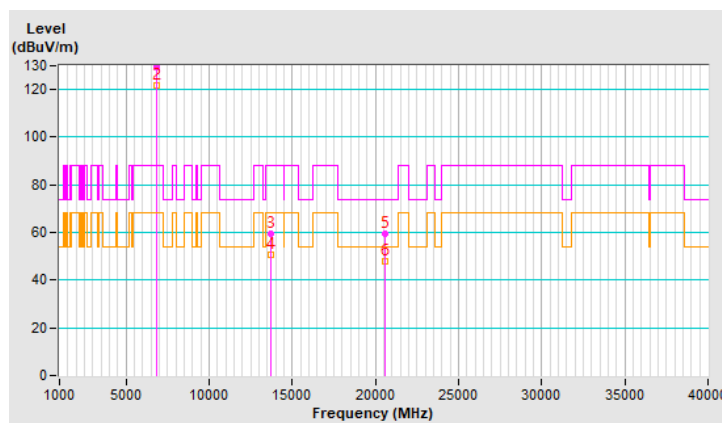


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5918.00	81.1 PK	88.2	-7.1	2.03 H	124	79.6	1.5
2	#5918.00	65.5 AV	68.2	-2.7	2.03 H	124	64.0	1.5
3	*5955.00	122.5 PK			2.03 H	124	120.9	1.6
4	*5955.00	114.4 AV			2.03 H	124	112.8	1.6
5	11910.00	62.7 PK	74.0	-11.3	1.93 H	243	51.6	11.1
6	11910.00	53.5 AV	54.0	-0.5	1.93 H	243	42.4	11.1
7	17865.00	54.6 PK	74.0	-19.4	1.62 H	105	32.5	22.1
8	17865.00	43.5 AV	54.0	-10.5	1.62 H	105	21.4	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

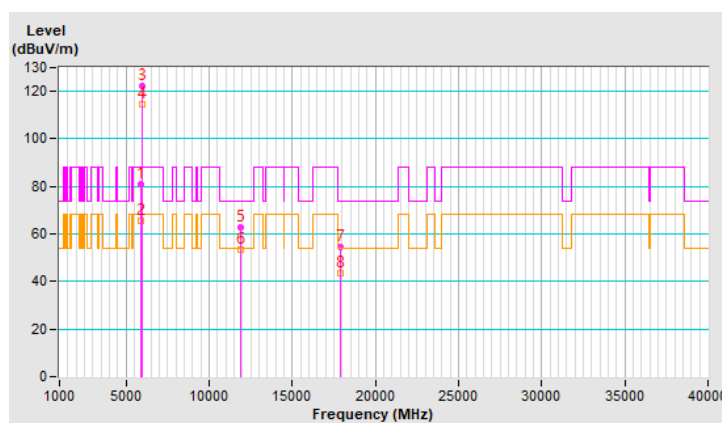


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5916.00	80.9 PK	88.2	-7.3	2.41 V	92	79.4	1.5
2	#5916.00	67.8 AV	68.2	-0.4	2.41 V	92	66.3	1.5
3	*5955.00	122.3 PK			2.41 V	92	120.7	1.6
4	*5955.00	114.2 AV			2.41 V	92	112.6	1.6
5	11910.00	58.6 PK	74.0	-15.4	1.97 V	209	47.5	11.1
6	11910.00	50.1 AV	54.0	-3.9	1.97 V	209	39.0	11.1
7	17865.00	59.5 PK	74.0	-14.5	2.40 V	250	37.4	22.1
8	17865.00	47.6 AV	54.0	-6.4	2.40 V	250	25.5	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

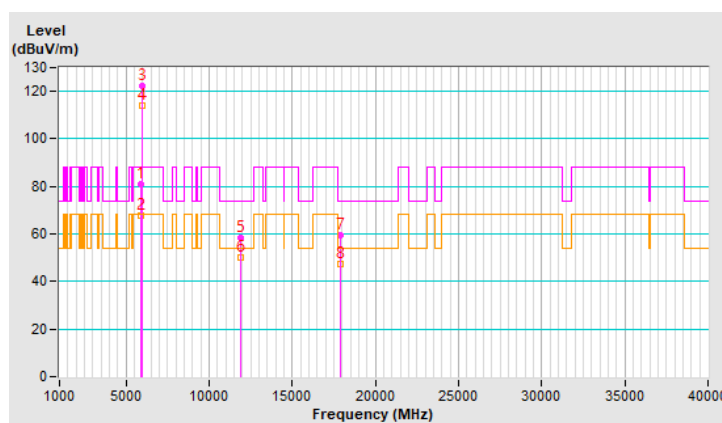


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.1 PK			2.02 H	118	119.1	3.0
2	*6415.00	114.1 AV			2.02 H	118	111.1	3.0
3	#12830.00	62.8 PK	88.2	-25.4	1.90 H	213	52.2	10.6
4	#12830.00	53.6 AV	68.2	-14.6	1.90 H	213	43.0	10.6
5	19245.00	54.5 PK	74.0	-19.5	1.65 H	77	60.9	-6.4
6	19245.00	43.8 AV	54.0	-10.2	1.65 H	77	50.2	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

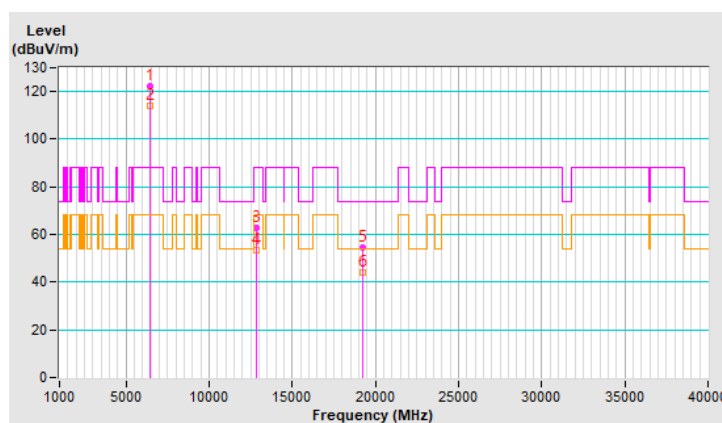


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.6 PK			2.35 V	80	118.6	3.0
2	*6415.00	113.7 AV			2.35 V	80	110.7	3.0
3	#12830.00	59.2 PK	88.2	-29.0	1.86 V	224	48.6	10.6
4	#12830.00	50.4 AV	68.2	-17.8	1.86 V	224	39.8	10.6
5	19245.00	60.3 PK	74.0	-13.7	2.42 V	246	66.7	-6.4
6	19245.00	48.3 AV	54.0	-5.7	2.42 V	246	54.7	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

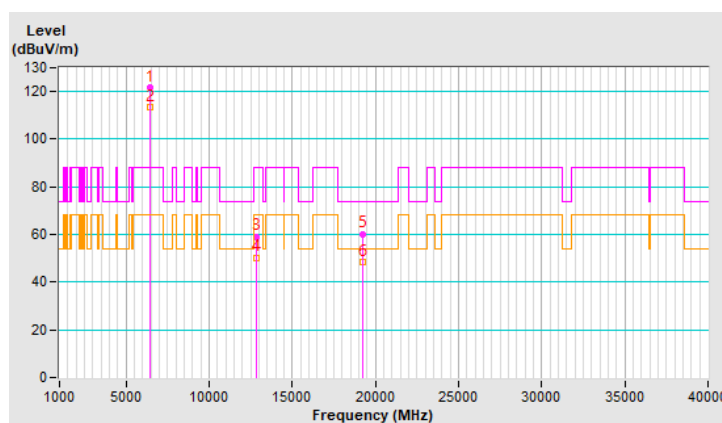


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.5 PK			2.08 H	126	118.9	3.6
2	*6535.00	114.2 AV			2.08 H	126	110.6	3.6
3	#13070.00	62.7 PK	88.2	-25.5	1.93 H	220	51.9	10.8
4	#13070.00	53.2 AV	68.2	-15.0	1.93 H	220	42.4	10.8
5	19605.00	54.1 PK	74.0	-19.9	1.67 H	87	60.1	-6.0
6	19605.00	43.4 AV	54.0	-10.6	1.67 H	87	49.4	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

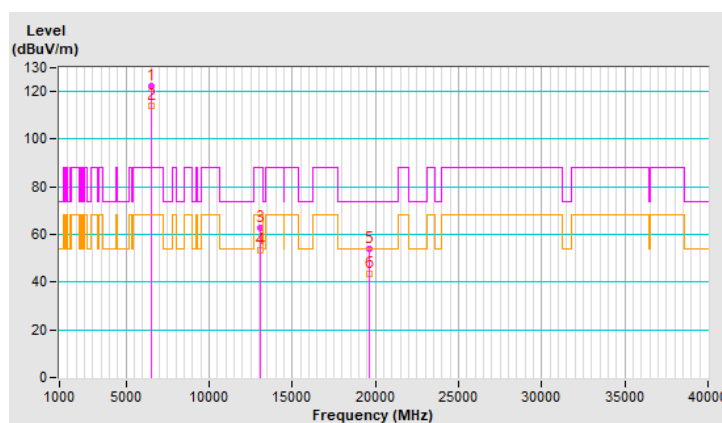


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.5 PK			2.38 V	104	119.9	3.6
2	*6535.00	116.7 AV			2.38 V	104	113.1	3.6
3	#13070.00	59.2 PK	88.2	-29.0	1.97 V	234	48.4	10.8
4	#13070.00	50.5 AV	68.2	-17.7	1.97 V	234	39.7	10.8
5	19605.00	60.0 PK	74.0	-14.0	2.42 V	242	66.0	-6.0
6	19605.00	47.9 AV	54.0	-6.1	2.42 V	242	53.9	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

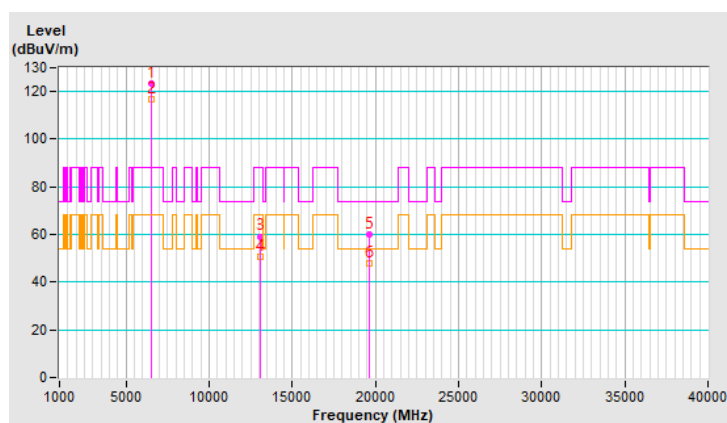


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.6 PK			2.06 H	136	118.5	4.1
2	*6855.00	114.2 AV			2.06 H	136	110.1	4.1
3	#13710.00	62.6 PK	88.2	-25.6	1.94 H	230	49.7	12.9
4	#13710.00	53.4 AV	68.2	-14.8	1.94 H	230	40.5	12.9
5	20565.00	54.3 PK	74.0	-19.7	1.68 H	82	59.1	-4.8
6	20565.00	43.5 AV	54.0	-10.5	1.68 H	82	48.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

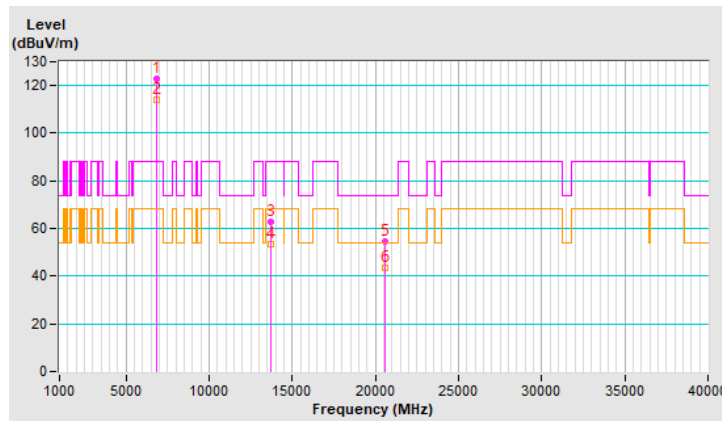


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	126.7 PK			2.42 V	86	122.6	4.1
2	*6855.00	118.5 AV			2.42 V	86	114.4	4.1
3	#13710.00	58.6 PK	88.2	-29.6	1.97 V	207	45.7	12.9
4	#13710.00	50.0 AV	68.2	-18.2	1.97 V	207	37.1	12.9
5	20565.00	59.7 PK	74.0	-14.3	2.33 V	247	64.5	-4.8
6	20565.00	47.8 AV	54.0	-6.2	2.33 V	247	52.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

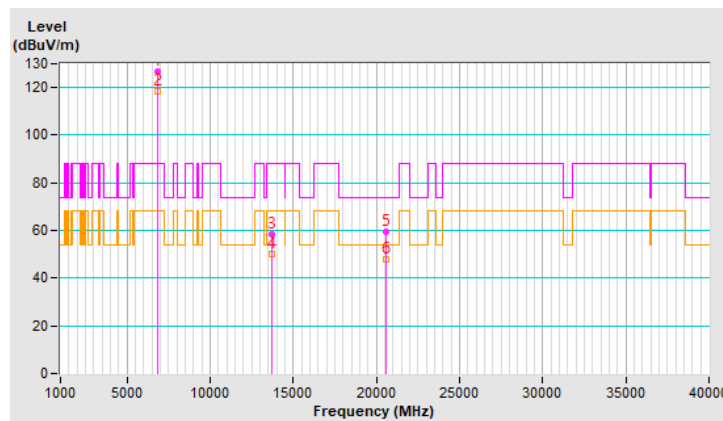


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.7 PK	88.2	-8.5	2.01 H	120	78.2	1.5
2	#5925.00	65.9 AV	68.2	-2.3	2.01 H	120	64.4	1.5
3	*5955.00	120.3 PK			2.01 H	120	118.7	1.6
4	*5955.00	110.7 AV			2.01 H	120	109.1	1.6
5	11910.00	62.8 PK	74.0	-11.2	1.95 H	226	51.7	11.1
6	11910.00	53.4 AV	54.0	-0.6	1.95 H	226	42.3	11.1
7	17865.00	54.3 PK	74.0	-19.7	1.69 H	96	32.2	22.1
8	17865.00	43.8 AV	54.0	-10.2	1.69 H	96	21.7	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

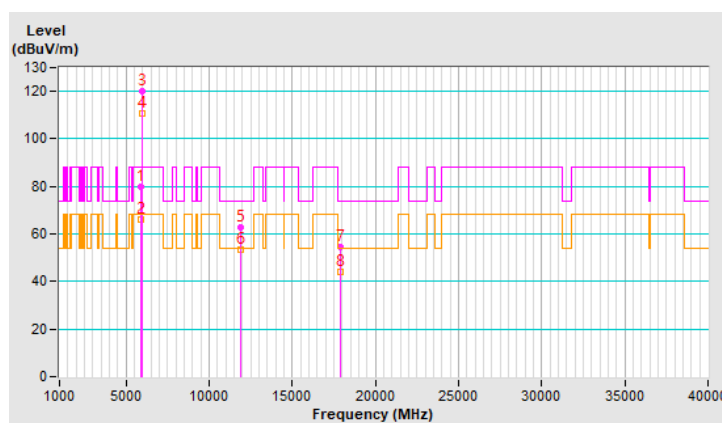


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.4 PK	88.2	-5.8	2.41 V	122	80.9	1.5
2	#5925.00	68.0 AV	68.2	-0.2	2.41 V	122	66.5	1.5
3	*5955.00	120.3 PK			2.41 V	122	118.7	1.6
4	*5955.00	112.1 AV			2.41 V	122	110.5	1.6
5	11910.00	59.0 PK	74.0	-15.0	1.93 V	212	47.9	11.1
6	11910.00	50.6 AV	54.0	-3.4	1.93 V	212	39.5	11.1
7	17865.00	60.1 PK	74.0	-13.9	2.32 V	235	38.0	22.1
8	17865.00	48.0 AV	54.0	-6.0	2.32 V	235	25.9	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

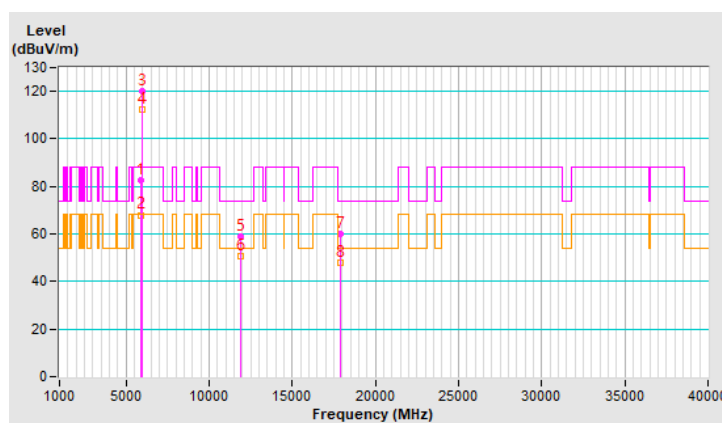


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.9 PK			1.98 H	131	116.9	3.0
2	*6415.00	110.3 AV			1.98 H	131	107.3	3.0
3	#12830.00	62.3 PK	88.2	-25.9	1.92 H	217	51.7	10.6
4	#12830.00	53.3 AV	68.2	-14.9	1.92 H	217	42.7	10.6
5	19245.00	54.6 PK	74.0	-19.4	1.68 H	67	61.0	-6.4
6	19245.00	43.9 AV	54.0	-10.1	1.68 H	67	50.3	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

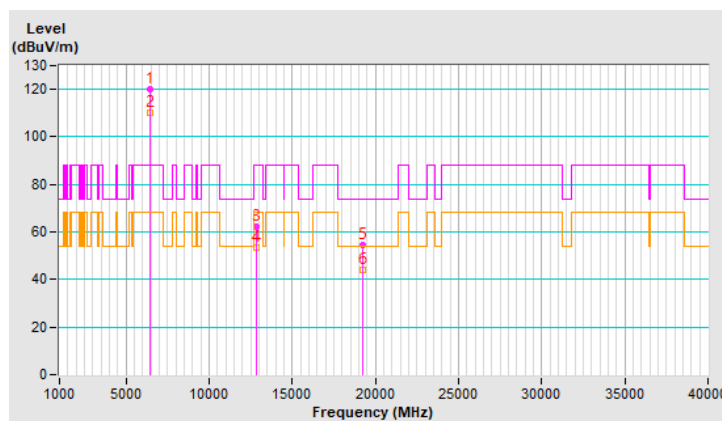


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.8 PK			2.41 V	119	117.8	3.0
2	*6415.00	112.3 AV			2.41 V	119	109.3	3.0
3	#12830.00	59.3 PK	88.2	-28.9	1.90 V	222	48.7	10.6
4	#12830.00	50.7 AV	68.2	-17.5	1.90 V	222	40.1	10.6
5	19245.00	59.6 PK	74.0	-14.4	2.32 V	261	66.0	-6.4
6	19245.00	48.0 AV	54.0	-6.0	2.32 V	261	54.4	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

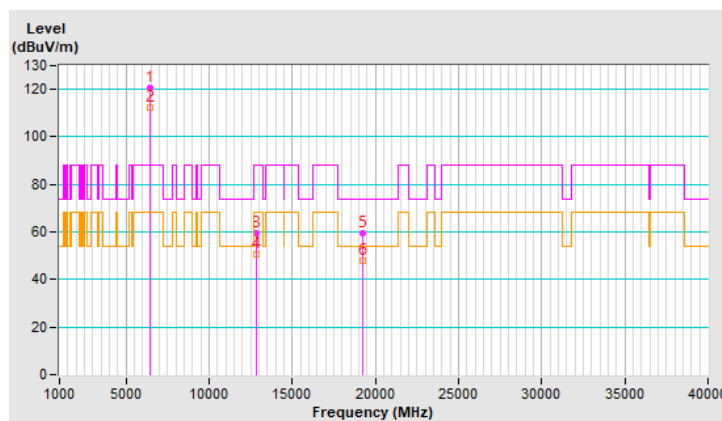


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.6 PK			1.95 H	122	117.0	3.6
2	*6535.00	110.8 AV			1.95 H	122	107.2	3.6
3	#13070.00	62.7 PK	88.2	-25.5	1.95 H	220	51.9	10.8
4	#13070.00	53.2 AV	68.2	-15.0	1.95 H	220	42.4	10.8
5	19605.00	54.8 PK	74.0	-19.2	1.72 H	69	60.8	-6.0
6	19605.00	43.8 AV	54.0	-10.2	1.72 H	69	49.8	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

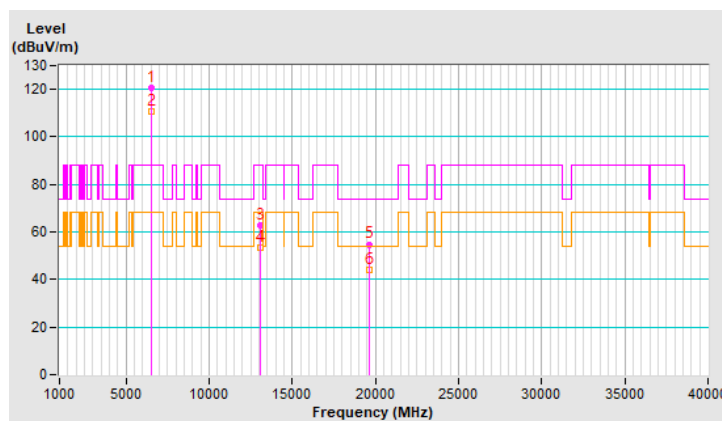


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.4 PK			2.40 V	130	119.8	3.6
2	*6535.00	115.0 AV			2.40 V	130	111.4	3.6
3	#13070.00	58.8 PK	88.2	-29.4	1.90 V	234	48.0	10.8
4	#13070.00	50.1 AV	68.2	-18.1	1.90 V	234	39.3	10.8
5	19605.00	59.9 PK	74.0	-14.1	2.38 V	253	65.9	-6.0
6	19605.00	48.1 AV	54.0	-5.9	2.38 V	253	54.1	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

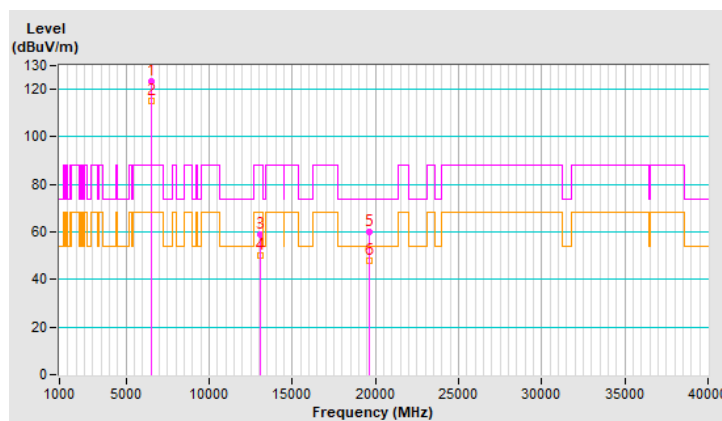


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.6 PK			1.97 H	116	116.5	4.1
2	*6855.00	111.0 AV			1.97 H	116	106.9	4.1
3	#13710.00	62.7 PK	88.2	-25.5	2.00 H	217	49.8	12.9
4	#13710.00	53.6 AV	68.2	-14.6	2.00 H	217	40.7	12.9
5	20565.00	54.1 PK	74.0	-19.9	1.70 H	98	58.9	-4.8
6	20565.00	43.4 AV	54.0	-10.6	1.70 H	98	48.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

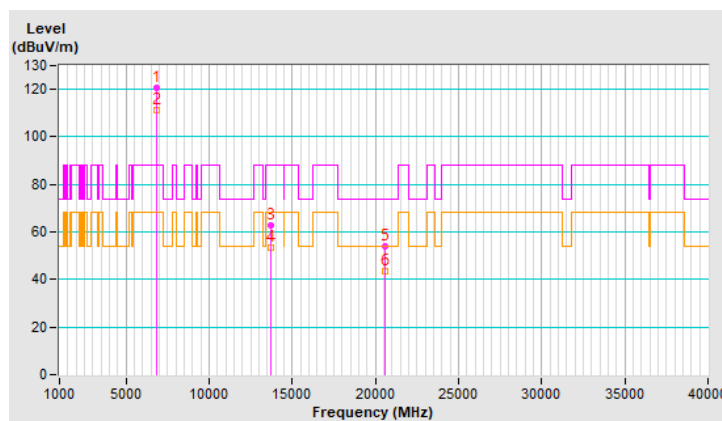


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	124.4 PK			2.37 V	86	120.3	4.1
2	*6855.00	115.9 AV			2.37 V	86	111.8	4.1
3	#13710.00	59.6 PK	88.2	-28.6	1.97 V	233	46.7	12.9
4	#13710.00	50.8 AV	68.2	-17.4	1.97 V	233	37.9	12.9
5	20565.00	59.4 PK	74.0	-14.6	2.28 V	253	64.2	-4.8
6	20565.00	47.4 AV	54.0	-6.6	2.28 V	253	52.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

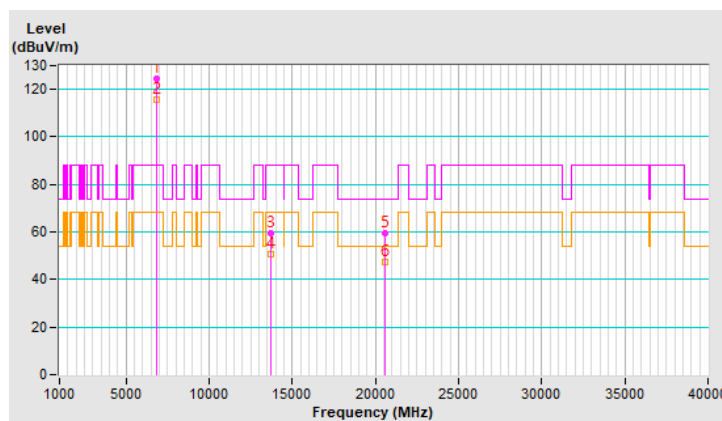

Mode B


1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.9 PK	88.2	-17.3	1.36 H	149	69.4	1.5
2	#5925.00	55.4 AV	68.2	-12.8	1.36 H	149	53.9	1.5
3	*5955.00	108.6 PK			1.36 H	149	107.0	1.6
4	*5955.00	100.5 AV			1.36 H	149	98.9	1.6
5	11910.00	55.8 PK	74.0	-18.2	2.46 H	175	44.7	11.1
6	11910.00	44.6 AV	54.0	-9.4	2.46 H	175	33.5	11.1
7	17865.00	54.2 PK	74.0	-19.8	1.47 H	80	32.1	22.1
8	17865.00	44.5 AV	54.0	-9.5	1.47 H	80	22.4	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

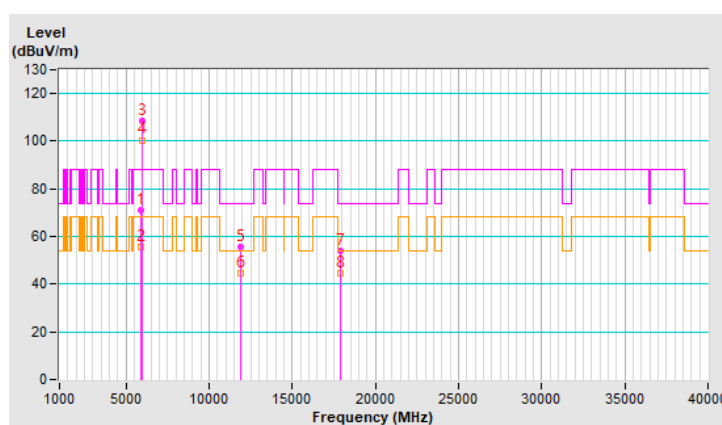


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.7 PK	88.2	-16.5	1.22 V	78	70.2	1.5
2	#5925.00	57.5 AV	68.2	-10.7	1.22 V	78	56.0	1.5
3	*5955.00	114.9 PK			1.22 V	78	113.3	1.6
4	*5955.00	105.0 AV			1.22 V	78	103.4	1.6
5	11910.00	55.8 PK	74.0	-18.2	1.20 V	227	44.7	11.1
6	11910.00	44.4 AV	54.0	-9.6	1.20 V	227	33.3	11.1
7	17865.00	58.3 PK	74.0	-15.7	2.38 V	293	36.2	22.1
8	17865.00	47.4 AV	54.0	-6.6	2.38 V	293	25.3	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

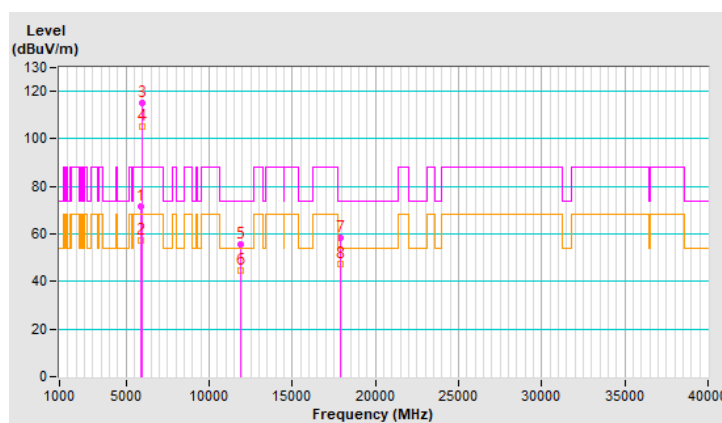


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	106.4 PK			1.62 H	33	104.4	2.0
2	*6175.00	98.4 AV			1.62 H	33	96.4	2.0
3	12350.00	55.9 PK	74.0	-18.1	2.42 H	177	45.8	10.1
4	12350.00	44.5 AV	54.0	-9.5	2.42 H	177	34.4	10.1
5	18525.00	54.5 PK	74.0	-19.5	1.50 H	79	61.1	-6.6
6	18525.00	44.4 AV	54.0	-9.6	1.50 H	79	51.0	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

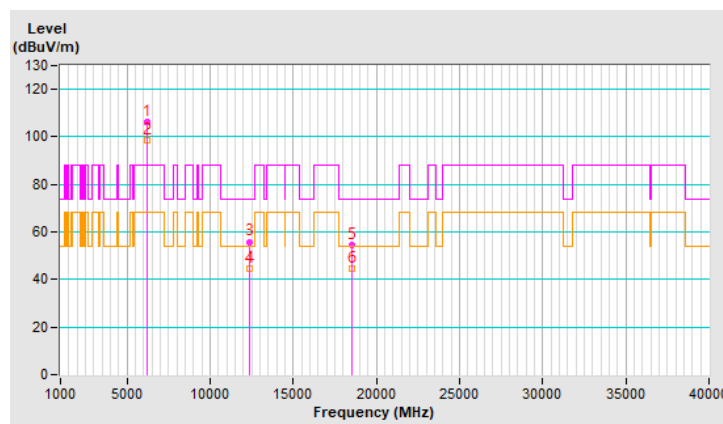


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	112.1 PK			1.18 V	249	110.1	2.0
2	*6175.00	104.1 AV			1.18 V	249	102.1	2.0
3	12350.00	55.5 PK	74.0	-18.5	1.28 V	225	45.4	10.1
4	12350.00	44.7 AV	54.0	-9.3	1.28 V	225	34.6	10.1
5	18525.00	58.8 PK	74.0	-15.2	2.40 V	305	65.4	-6.6
6	18525.00	47.9 AV	54.0	-6.1	2.40 V	305	54.5	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

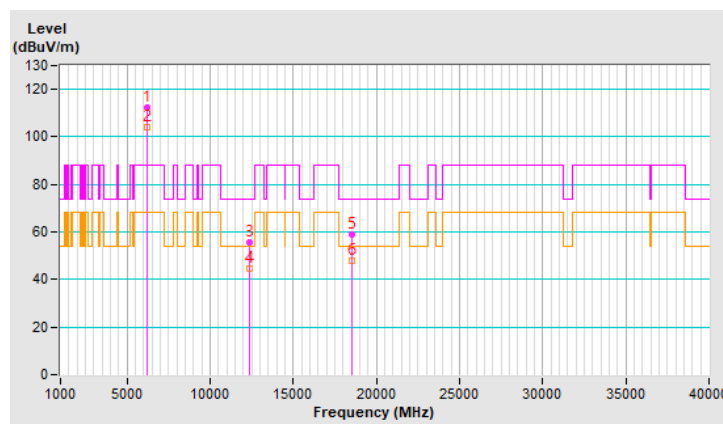


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	106.4 PK			1.64 H	23	103.4	3.0
2	*6415.00	98.2 AV			1.64 H	23	95.2	3.0
3	#12830.00	56.5 PK	88.2	-31.7	2.39 H	168	45.9	10.6
4	#12830.00	44.9 AV	68.2	-23.3	2.39 H	168	34.3	10.6
5	19245.00	54.9 PK	74.0	-19.1	1.48 H	93	61.3	-6.4
6	19245.00	45.3 AV	54.0	-8.7	1.48 H	93	51.7	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

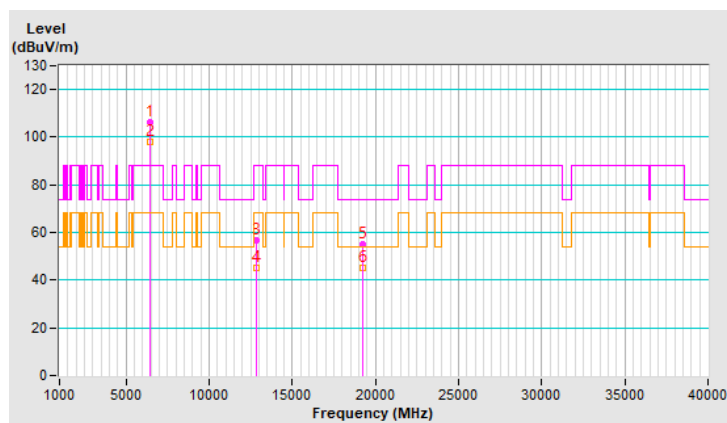


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.0 PK			1.18 V	251	109.0	3.0
2	*6415.00	104.2 AV			1.18 V	251	101.2	3.0
3	#12830.00	55.4 PK	88.2	-32.8	1.22 V	238	44.8	10.6
4	#12830.00	44.5 AV	68.2	-23.7	1.22 V	238	33.9	10.6
5	19245.00	59.1 PK	74.0	-14.9	2.34 V	318	65.5	-6.4
6	19245.00	48.0 AV	54.0	-6.0	2.34 V	318	54.4	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

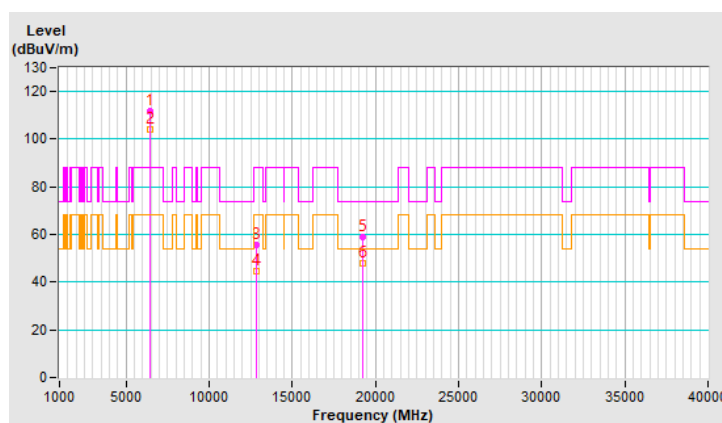


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	106.8 PK			1.64 H	20	103.2	3.6
2	*6535.00	98.5 AV			1.64 H	20	94.9	3.6
3	#13070.00	55.2 PK	88.2	-33.0	2.40 H	182	44.4	10.8
4	#13070.00	44.0 AV	68.2	-24.2	2.40 H	182	33.2	10.8
5	19605.00	55.0 PK	74.0	-19.0	1.48 H	86	61.0	-6.0
6	19605.00	44.8 AV	54.0	-9.2	1.48 H	86	50.8	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

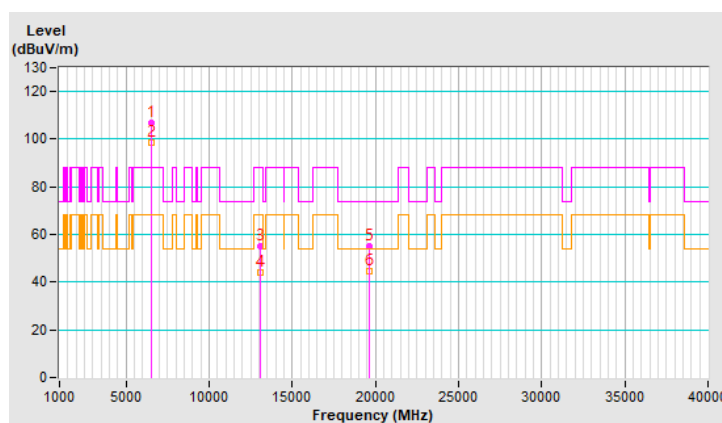


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.9 PK			1.12 V	240	107.3	3.6
2	*6535.00	103.0 AV			1.12 V	240	99.4	3.6
3	#13070.00	55.5 PK	88.2	-32.7	1.21 V	238	44.7	10.8
4	#13070.00	44.1 AV	68.2	-24.1	1.21 V	238	33.3	10.8
5	19605.00	59.2 PK	74.0	-14.8	2.35 V	294	65.2	-6.0
6	19605.00	48.0 AV	54.0	-6.0	2.35 V	294	54.0	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

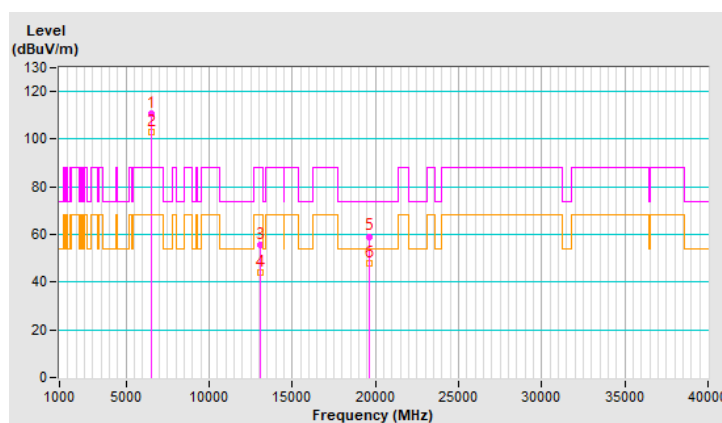


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.7 PK			1.63 H	43	102.9	3.8
2	*6695.00	98.3 AV			1.63 H	43	94.5	3.8
3	13390.00	55.9 PK	74.0	-18.1	2.43 H	172	43.7	12.2
4	13390.00	44.8 AV	54.0	-9.2	2.43 H	172	32.6	12.2
5	20085.00	55.2 PK	74.0	-18.8	1.49 H	103	60.5	-5.3
6	20085.00	45.2 AV	54.0	-8.8	1.49 H	103	50.5	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

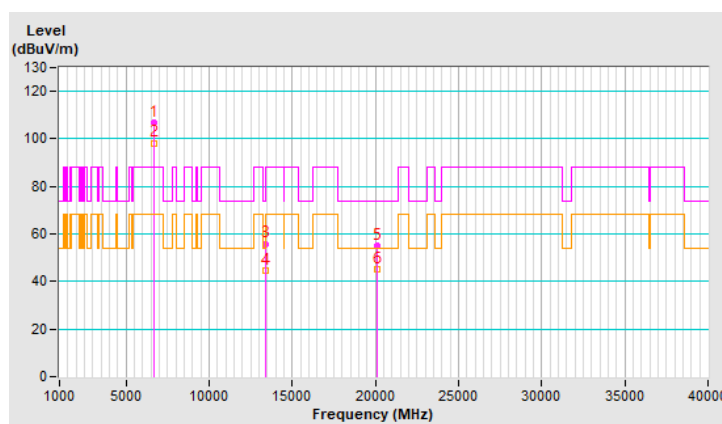


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	112.8 PK			1.08 V	251	109.0	3.8
2	*6695.00	102.8 AV			1.08 V	251	99.0	3.8
3	13390.00	54.9 PK	74.0	-19.1	1.27 V	223	42.7	12.2
4	13390.00	43.8 AV	54.0	-10.2	1.27 V	223	31.6	12.2
5	20085.00	58.5 PK	74.0	-15.5	2.34 V	308	63.8	-5.3
6	20085.00	47.2 AV	54.0	-6.8	2.34 V	308	52.5	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

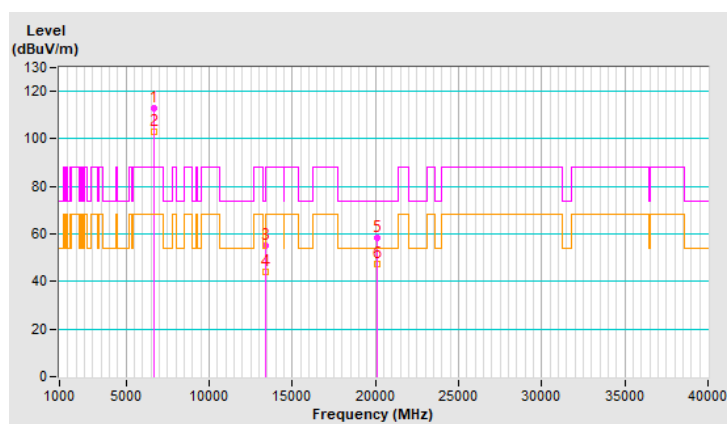


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	106.3 PK			1.59 H	23	102.2	4.1
2	*6855.00	98.1 AV			1.59 H	23	94.0	4.1
3	#13710.00	55.2 PK	88.2	-33.0	2.39 H	176	42.3	12.9
4	#13710.00	43.9 AV	68.2	-24.3	2.39 H	176	31.0	12.9
5	20565.00	54.5 PK	74.0	-19.5	1.50 H	100	59.3	-4.8
6	20565.00	44.9 AV	54.0	-9.1	1.50 H	100	49.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

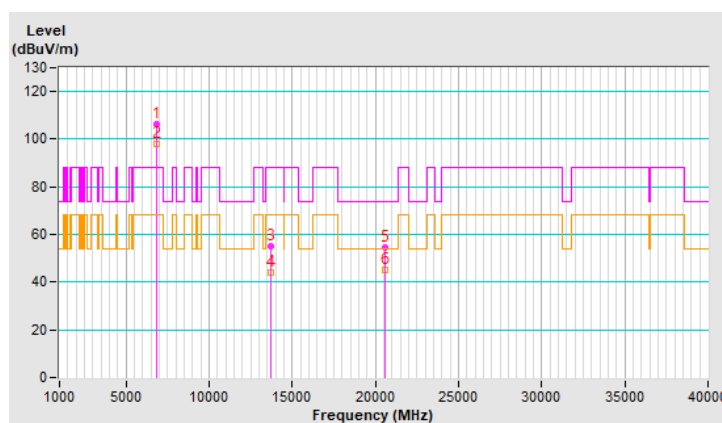


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	112.1 PK			1.10 V	254	108.0	4.1
2	*6855.00	102.3 AV			1.10 V	254	98.2	4.1
3	#13710.00	55.4 PK	88.2	-32.8	1.26 V	234	42.5	12.9
4	#13710.00	44.0 AV	68.2	-24.2	1.26 V	234	31.1	12.9
5	20565.00	58.4 PK	74.0	-15.6	2.43 V	298	63.2	-4.8
6	20565.00	47.2 AV	54.0	-6.8	2.43 V	298	52.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

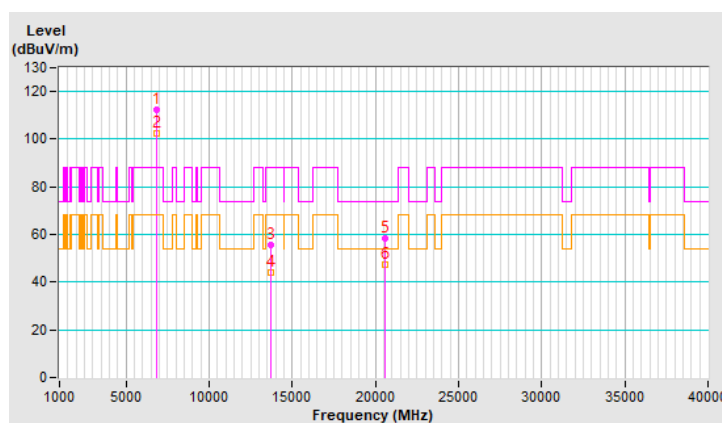


2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.8 PK	88.2	-29.4	1.63 H	25	57.3	1.5
2	#5925.00	48.4 AV	68.2	-19.8	1.63 H	25	46.9	1.5
3	*5955.00	114.8 PK			1.63 H	25	113.2	1.6
4	*5955.00	103.1 AV			1.63 H	25	101.5	1.6
5	11910.00	45.8 PK	74.0	-28.2	2.64 H	156	34.7	11.1
6	11910.00	36.1 AV	54.0	-17.9	2.64 H	156	25.0	11.1
7	17865.00	51.4 PK	74.0	-22.6	1.64 H	273	29.3	22.1
8	17865.00	39.0 AV	54.0	-15.0	1.64 H	273	16.9	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

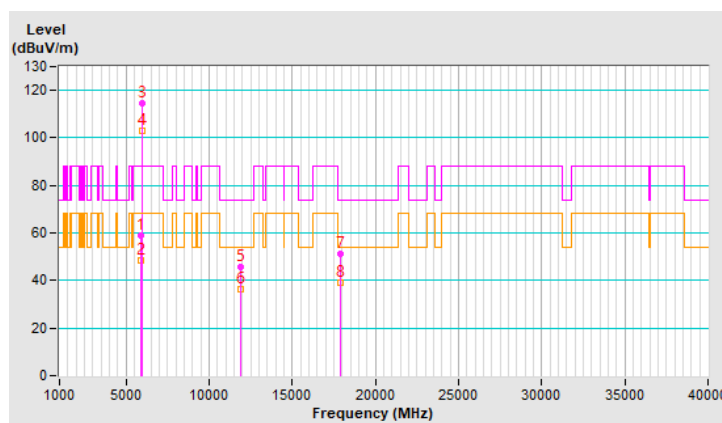


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.0 PK	88.2	-23.2	1.16 V	270	63.5	1.5
2	#5925.00	54.8 AV	68.2	-13.4	1.16 V	270	53.3	1.5
3	*5955.00	121.4 PK			1.16 V	270	119.8	1.6
4	*5955.00	110.4 AV			1.16 V	270	108.8	1.6
5	11910.00	44.7 PK	74.0	-29.3	2.81 V	299	33.6	11.1
6	11910.00	35.1 AV	54.0	-18.9	2.81 V	299	24.0	11.1
7	17865.00	53.1 PK	74.0	-20.9	2.09 V	186	31.0	22.1
8	17865.00	41.1 AV	54.0	-12.9	2.09 V	186	19.0	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

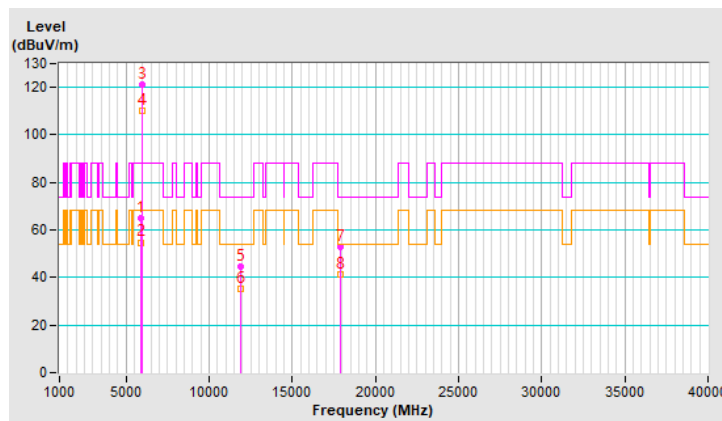


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	115.6 PK			1.65 H	36	113.6	2.0
2	*6175.00	103.6 AV			1.65 H	36	101.6	2.0
3	12350.00	45.6 PK	74.0	-28.4	2.65 H	153	35.5	10.1
4	12350.00	36.1 AV	54.0	-17.9	2.65 H	153	26.0	10.1
5	18525.00	50.7 PK	74.0	-23.3	1.65 H	260	57.3	-6.6
6	18525.00	38.6 AV	54.0	-15.4	1.65 H	260	45.2	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

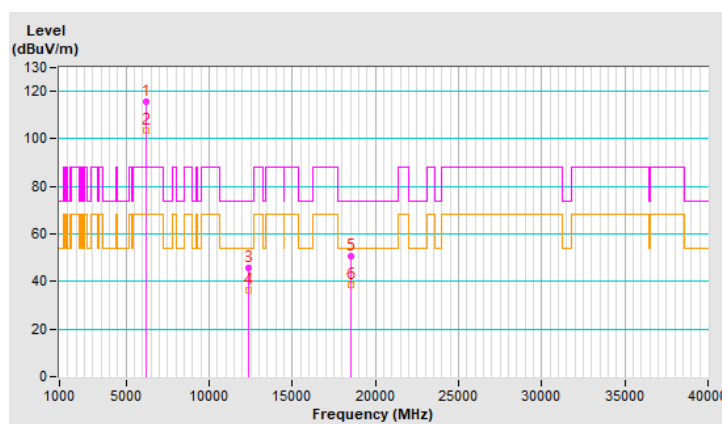


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	122.0 PK			1.18 V	281	120.0	2.0
2	*6175.00	110.8 AV			1.18 V	281	108.8	2.0
3	12350.00	44.2 PK	74.0	-29.8	2.85 V	309	34.1	10.1
4	12350.00	34.7 AV	54.0	-19.3	2.85 V	309	24.6	10.1
5	18525.00	52.8 PK	74.0	-21.2	2.15 V	182	59.4	-6.6
6	18525.00	40.8 AV	54.0	-13.2	2.15 V	182	47.4	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

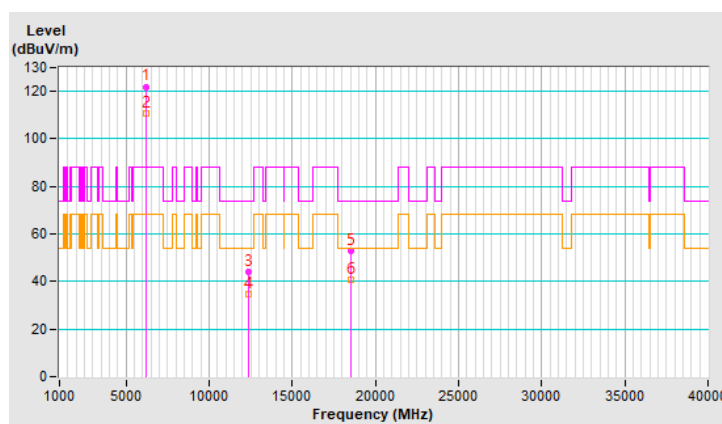


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.4 PK			1.63 H	35	113.4	3.0
2	*6415.00	104.1 AV			1.63 H	35	101.1	3.0
3	#12830.00	45.3 PK	88.2	-42.9	2.69 H	156	34.7	10.6
4	#12830.00	35.7 AV	68.2	-32.5	2.69 H	156	25.1	10.6
5	19245.00	51.2 PK	74.0	-22.8	1.68 H	261	57.6	-6.4
6	19245.00	38.6 AV	54.0	-15.4	1.68 H	261	45.0	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

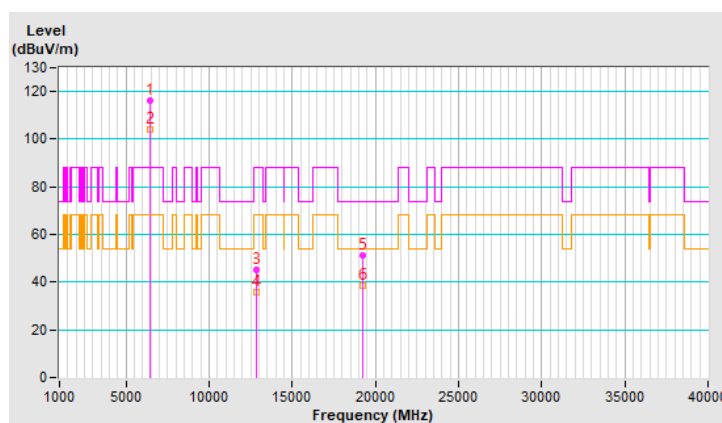


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.2 PK			1.13 V	281	118.2	3.0
2	*6415.00	110.3 AV			1.13 V	281	107.3	3.0
3	#12830.00	45.0 PK	88.2	-43.2	2.78 V	311	34.4	10.6
4	#12830.00	35.5 AV	68.2	-32.7	2.78 V	311	24.9	10.6
5	19245.00	53.4 PK	74.0	-20.6	2.10 V	175	59.8	-6.4
6	19245.00	41.3 AV	54.0	-12.7	2.10 V	175	47.7	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

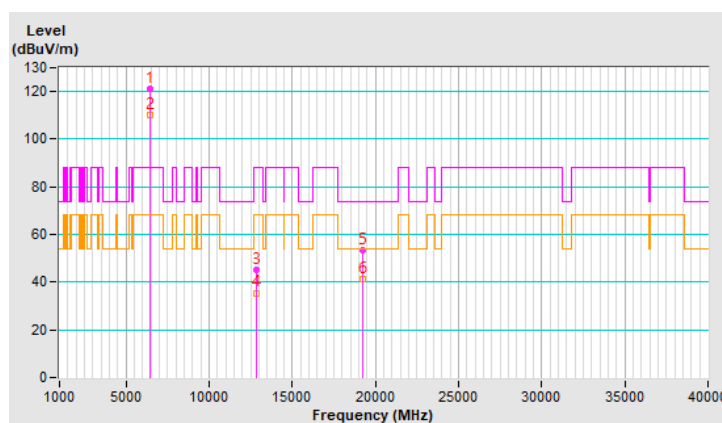


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.7 PK			1.68 H	23	112.1	3.6
2	*6535.00	103.7 AV			1.68 H	23	100.1	3.6
3	#13070.00	45.5 PK	88.2	-42.7	2.66 H	152	34.7	10.8
4	#13070.00	35.9 AV	68.2	-32.3	2.66 H	152	25.1	10.8
5	19605.00	50.9 PK	74.0	-23.1	1.69 H	276	56.9	-6.0
6	19605.00	38.6 AV	54.0	-15.4	1.69 H	276	44.6	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

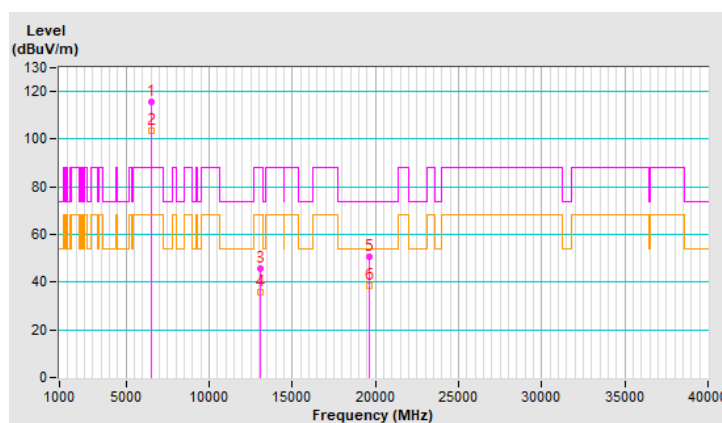


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.3 PK			1.15 V	260	117.7	3.6
2	*6535.00	112.1 AV			1.15 V	260	108.5	3.6
3	#13070.00	45.4 PK	88.2	-42.8	2.83 V	288	34.6	10.8
4	#13070.00	35.6 AV	68.2	-32.6	2.83 V	288	24.8	10.8
5	19605.00	52.9 PK	74.0	-21.1	2.08 V	190	58.9	-6.0
6	19605.00	40.8 AV	54.0	-13.2	2.08 V	190	46.8	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

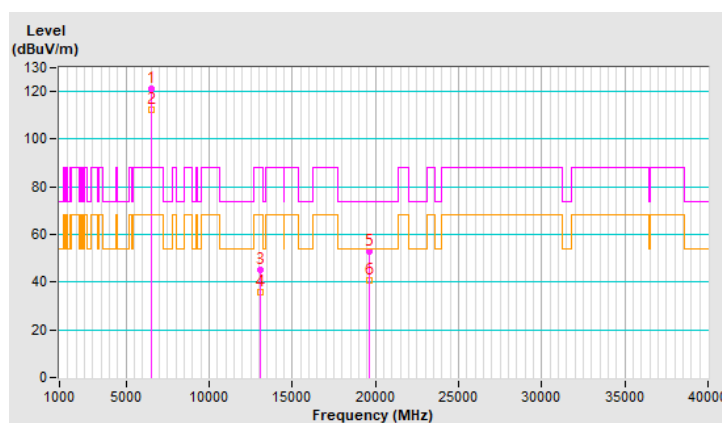


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.8 PK			1.59 H	24	112.0	3.8
2	*6695.00	103.9 AV			1.59 H	24	100.1	3.8
3	13390.00	46.1 PK	74.0	-27.9	2.62 H	147	33.9	12.2
4	13390.00	36.5 AV	54.0	-17.5	2.62 H	147	24.3	12.2
5	20085.00	52.0 PK	74.0	-22.0	1.62 H	281	57.3	-5.3
6	20085.00	39.5 AV	54.0	-14.5	1.62 H	281	44.8	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

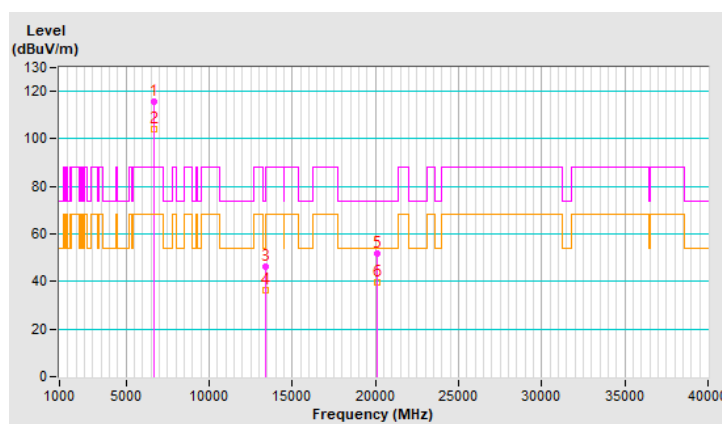


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.4 PK			1.11 V	259	117.6	3.8
2	*6695.00	112.2 AV			1.11 V	259	108.4	3.8
3	13390.00	45.2 PK	74.0	-28.8	2.85 V	294	33.0	12.2
4	13390.00	35.4 AV	54.0	-18.6	2.85 V	294	23.2	12.2
5	20085.00	53.2 PK	74.0	-20.8	2.14 V	191	58.5	-5.3
6	20085.00	41.4 AV	54.0	-12.6	2.14 V	191	46.7	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

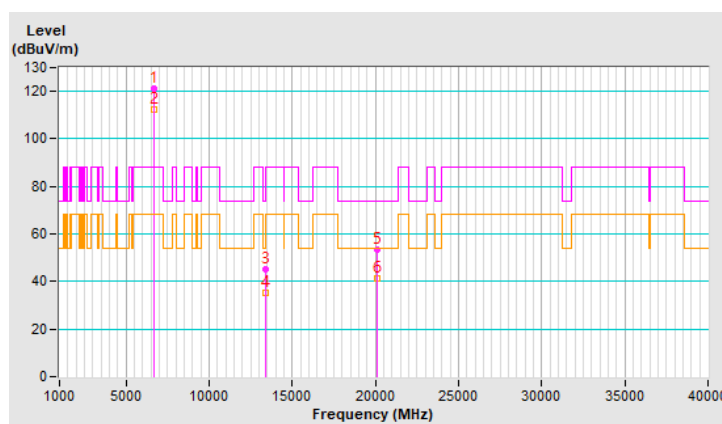


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.1 PK			1.64 H	36	111.0	4.1
2	*6855.00	103.2 AV			1.64 H	36	99.1	4.1
3	#13710.00	45.6 PK	88.2	-42.6	2.62 H	145	32.7	12.9
4	#13710.00	35.7 AV	68.2	-32.5	2.62 H	145	22.8	12.9
5	20565.00	52.1 PK	74.0	-21.9	1.70 H	280	56.9	-4.8
6	20565.00	39.5 AV	54.0	-14.5	1.70 H	280	44.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

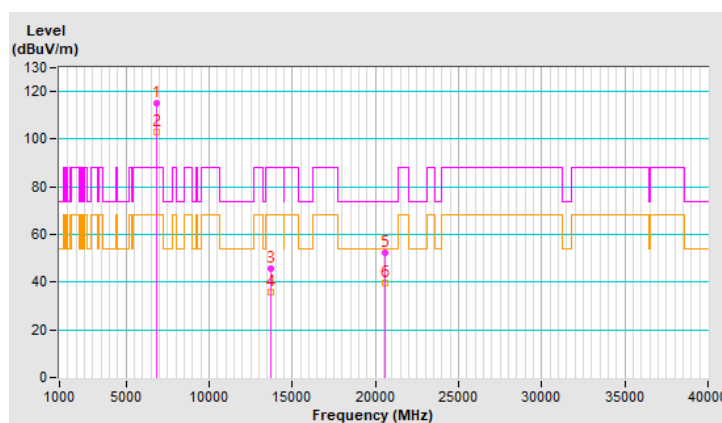


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.2 PK			1.11 V	268	117.1	4.1
2	*6855.00	111.9 AV			1.11 V	268	107.8	4.1
3	#13710.00	44.8 PK	88.2	-43.4	2.85 V	303	31.9	12.9
4	#13710.00	35.2 AV	68.2	-33.0	2.85 V	303	22.3	12.9
5	20565.00	52.8 PK	74.0	-21.2	2.06 V	175	57.6	-4.8
6	20565.00	40.6 AV	54.0	-13.4	2.06 V	175	45.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

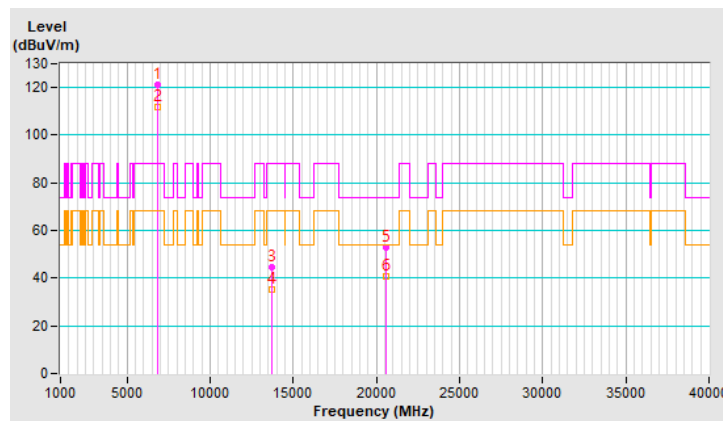


2T1S

RF Mode	802.11ax (HE20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.1 PK	88.2	-29.1	2.61 H	197	57.6	1.5
2	#5925.00	47.3 AV	68.2	-20.9	2.61 H	197	45.8	1.5
3	*5955.00	111.7 PK			2.61 H	197	110.1	1.6
4	*5955.00	100.1 AV			2.61 H	197	98.5	1.6
5	11910.00	46.6 PK	74.0	-27.4	2.65 H	185	35.5	11.1
6	11910.00	37.1 AV	54.0	-16.9	2.65 H	185	26.0	11.1
7	17865.00	52.0 PK	74.0	-22.0	1.74 H	233	29.9	22.1
8	17865.00	40.1 AV	54.0	-13.9	1.74 H	233	18.0	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

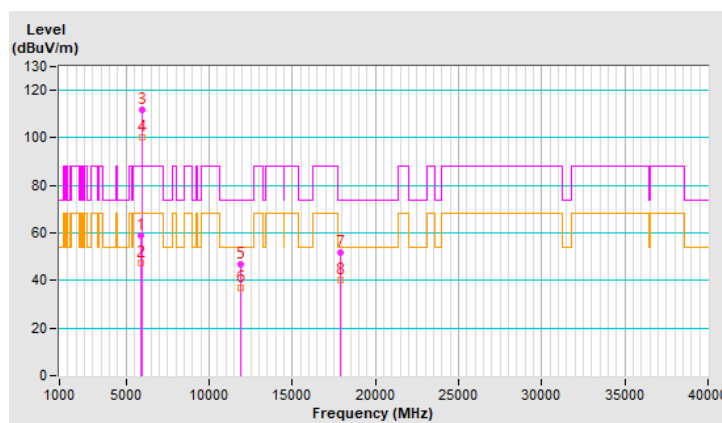


RF Mode	802.11ax (HE20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.8 PK	88.2	-25.4	3.13 V	58	61.3	1.5
2	#5925.00	52.6 AV	68.2	-15.6	3.13 V	58	51.1	1.5
3	*5955.00	120.0 PK			3.13 V	58	118.4	1.6
4	*5955.00	110.4 AV			3.13 V	58	108.8	1.6
5	11910.00	43.6 PK	74.0	-30.4	2.92 V	309	32.5	11.1
6	11910.00	34.5 AV	54.0	-19.5	2.92 V	309	23.4	11.1
7	17865.00	52.1 PK	74.0	-21.9	2.18 V	195	30.0	22.1
8	17865.00	40.5 AV	54.0	-13.5	2.18 V	195	18.4	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

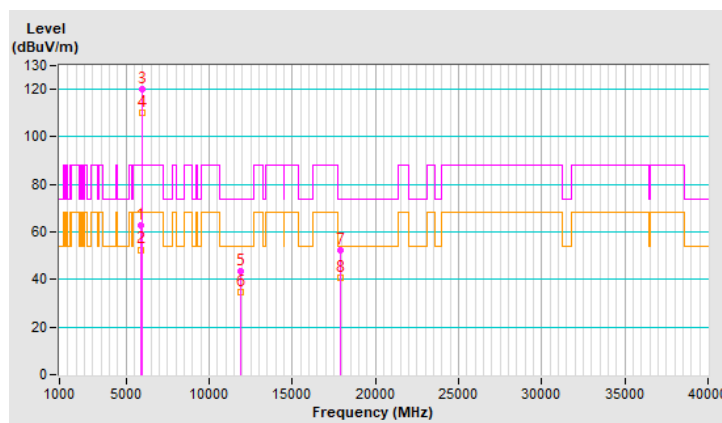


RF Mode	802.11ax (HE20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	111.7 PK			2.60 H	187	109.7	2.0
2	*6175.00	101.3 AV			2.60 H	187	99.3	2.0
3	12350.00	46.7 PK	74.0	-27.3	2.63 H	191	36.6	10.1
4	12350.00	37.0 AV	54.0	-17.0	2.63 H	191	26.9	10.1
5	18525.00	52.0 PK	74.0	-22.0	1.76 H	229	58.6	-6.6
6	18525.00	40.2 AV	54.0	-13.8	1.76 H	229	46.8	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

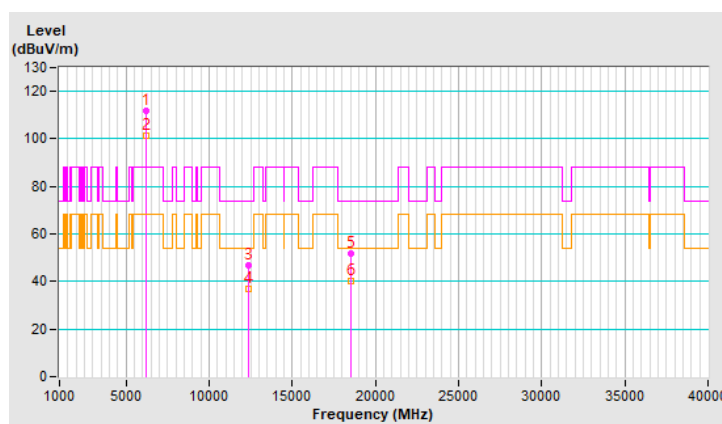


RF Mode	802.11ax (HE20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	119.7 PK			3.12 V	44	117.7	2.0
2	*6175.00	110.2 AV			3.12 V	44	108.2	2.0
3	12350.00	43.7 PK	74.0	-30.3	2.89 V	319	33.6	10.1
4	12350.00	34.9 AV	54.0	-19.1	2.89 V	319	24.8	10.1
5	18525.00	52.0 PK	74.0	-22.0	2.20 V	192	58.6	-6.6
6	18525.00	40.4 AV	54.0	-13.6	2.20 V	192	47.0	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

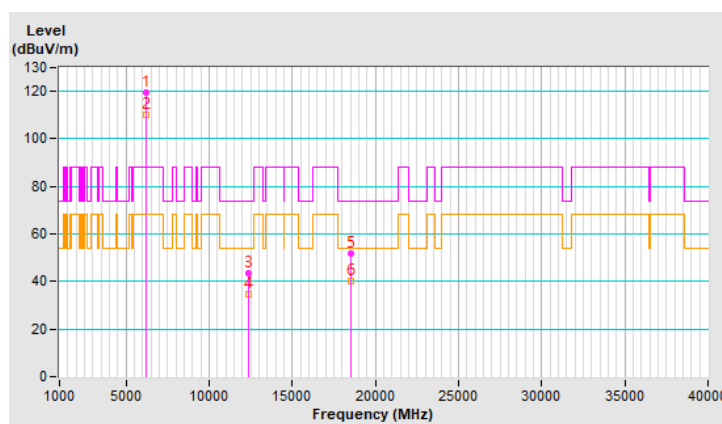


RF Mode	802.11ax (HE20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.8 PK			2.65 H	205	108.8	3.0
2	*6415.00	100.5 AV			2.65 H	205	97.5	3.0
3	#12830.00	46.8 PK	88.2	-41.4	2.60 H	198	36.2	10.6
4	#12830.00	37.3 AV	68.2	-30.9	2.60 H	198	26.7	10.6
5	19245.00	51.4 PK	74.0	-22.6	1.78 H	223	57.8	-6.4
6	19245.00	39.8 AV	54.0	-14.2	1.78 H	223	46.2	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

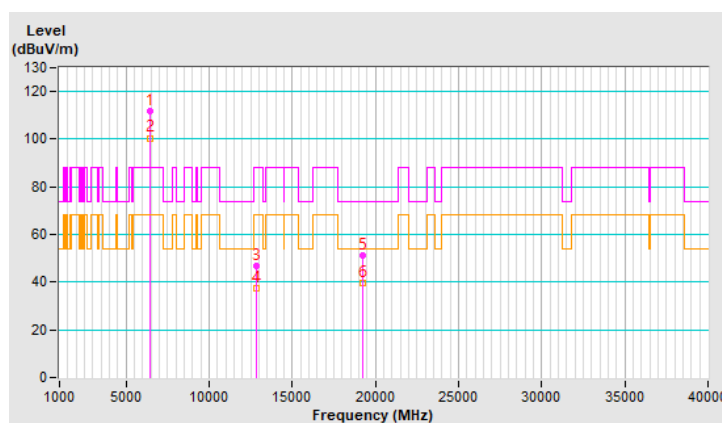


RF Mode	802.11ax (HE20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.7 PK			3.10 V	57	116.7	3.0
2	*6415.00	110.1 AV			3.10 V	57	107.1	3.0
3	#12830.00	43.8 PK	88.2	-44.4	2.95 V	297	33.2	10.6
4	#12830.00	34.9 AV	68.2	-33.3	2.95 V	297	24.3	10.6
5	19245.00	52.6 PK	74.0	-21.4	2.17 V	200	59.0	-6.4
6	19245.00	40.7 AV	54.0	-13.3	2.17 V	200	47.1	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

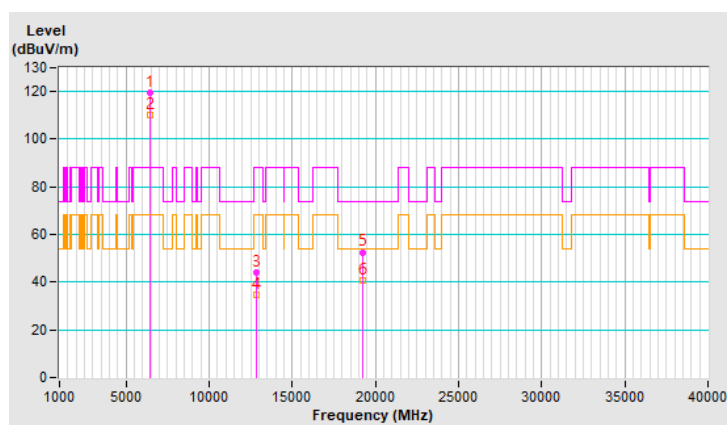


RF Mode	802.11ax (HE20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.3 PK			2.66 H	197	107.7	3.6
2	*6535.00	101.8 AV			2.66 H	197	98.2	3.6
3	#13070.00	47.1 PK	88.2	-41.1	2.67 H	183	36.3	10.8
4	#13070.00	37.5 AV	68.2	-30.7	2.67 H	183	26.7	10.8
5	19605.00	51.7 PK	74.0	-22.3	1.69 H	223	57.7	-6.0
6	19605.00	40.0 AV	54.0	-14.0	1.69 H	223	46.0	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

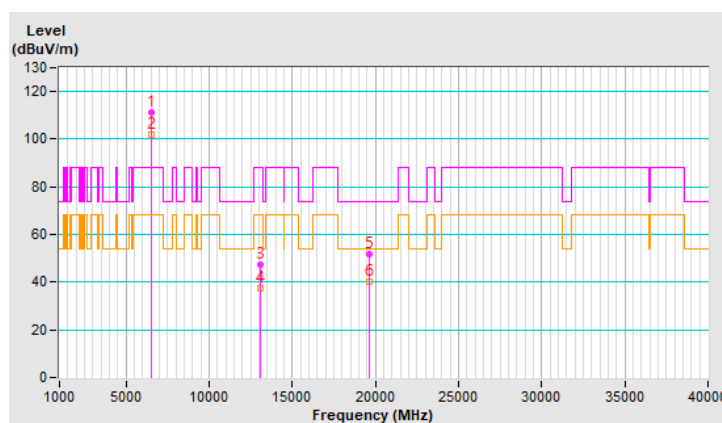


RF Mode	802.11ax (HE20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.8 PK			3.14 V	61	116.2	3.6
2	*6535.00	110.2 AV			3.14 V	61	106.6	3.6
3	#13070.00	43.7 PK	88.2	-44.5	2.89 V	299	32.9	10.8
4	#13070.00	34.7 AV	68.2	-33.5	2.89 V	299	23.9	10.8
5	19605.00	52.3 PK	74.0	-21.7	2.15 V	185	58.3	-6.0
6	19605.00	40.8 AV	54.0	-13.2	2.15 V	185	46.8	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

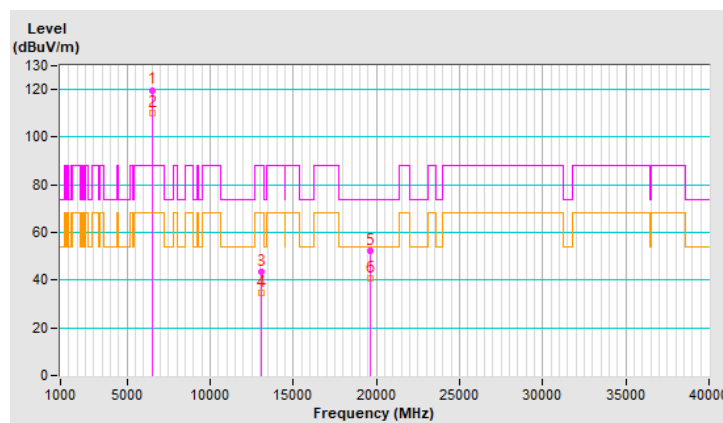


RF Mode	802.11ax (HE20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.1 PK			2.60 H	206	107.3	3.8
2	*6695.00	101.7 AV			2.60 H	206	97.9	3.8
3	13390.00	46.2 PK	74.0	-27.8	2.67 H	188	34.0	12.2
4	13390.00	36.9 AV	54.0	-17.1	2.67 H	188	24.7	12.2
5	20085.00	51.7 PK	74.0	-22.3	1.74 H	238	57.0	-5.3
6	20085.00	40.0 AV	54.0	-14.0	1.74 H	238	45.3	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

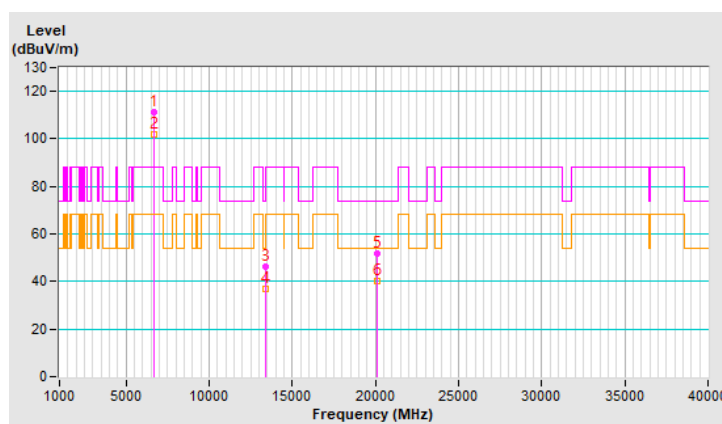


RF Mode	802.11ax (HE20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.3 PK			3.18 V	58	116.5	3.8
2	*6695.00	110.6 AV			3.18 V	58	106.8	3.8
3	13390.00	44.0 PK	74.0	-30.0	2.98 V	302	31.8	12.2
4	13390.00	35.0 AV	54.0	-19.0	2.98 V	302	22.8	12.2
5	20085.00	52.4 PK	74.0	-21.6	2.21 V	208	57.7	-5.3
6	20085.00	40.8 AV	54.0	-13.2	2.21 V	208	46.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

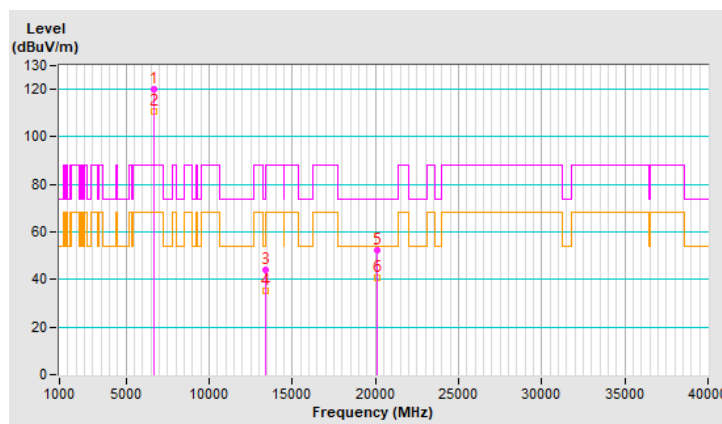


RF Mode	802.11ax (HE20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.7 PK			2.60 H	202	107.6	4.1
2	*6855.00	102.3 AV			2.60 H	202	98.2	4.1
3	#13710.00	46.1 PK	88.2	-42.1	2.69 H	174	33.2	12.9
4	#13710.00	36.6 AV	68.2	-31.6	2.69 H	174	23.7	12.9
5	20565.00	51.5 PK	74.0	-22.5	1.74 H	223	56.3	-4.8
6	20565.00	39.8 AV	54.0	-14.2	1.74 H	223	44.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

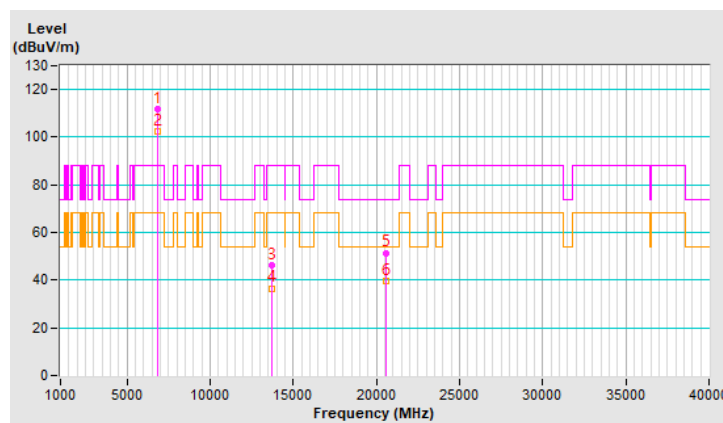


RF Mode	802.11ax (HE20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.9 PK			3.07 V	49	115.8	4.1
2	*6855.00	110.4 AV			3.07 V	49	106.3	4.1
3	#13710.00	43.2 PK	88.2	-45.0	2.87 V	323	30.3	12.9
4	#13710.00	34.3 AV	68.2	-33.9	2.87 V	323	21.4	12.9
5	20565.00	52.0 PK	74.0	-22.0	2.18 V	202	56.8	-4.8
6	20565.00	40.5 AV	54.0	-13.5	2.18 V	202	45.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

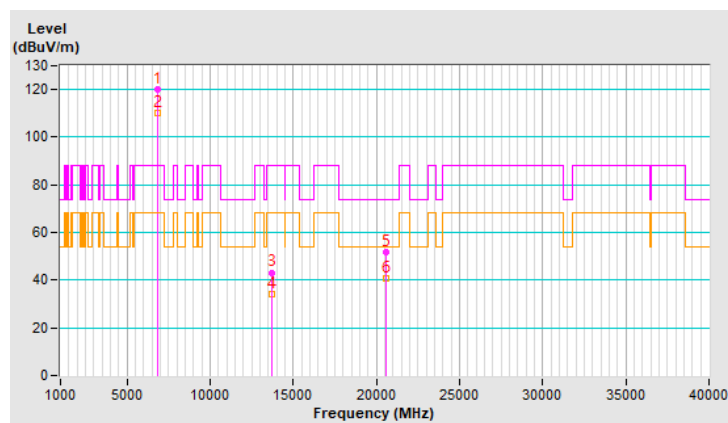


RF Mode	802.11ax (HE40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.8 PK	88.2	-28.4	2.34 H	193	58.3	1.5
2	#5925.00	50.4 AV	68.2	-17.8	2.34 H	193	48.9	1.5
3	*5965.00	109.8 PK			2.34 H	193	108.2	1.6
4	*5965.00	97.9 AV			2.34 H	193	96.3	1.6
5	11930.00	46.8 PK	74.0	-27.2	2.69 H	190	35.7	11.1
6	11930.00	37.1 AV	54.0	-16.9	2.69 H	190	26.0	11.1
7	17895.00	52.2 PK	74.0	-21.8	1.68 H	218	29.4	22.8
8	17895.00	40.4 AV	54.0	-13.6	1.68 H	218	17.6	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

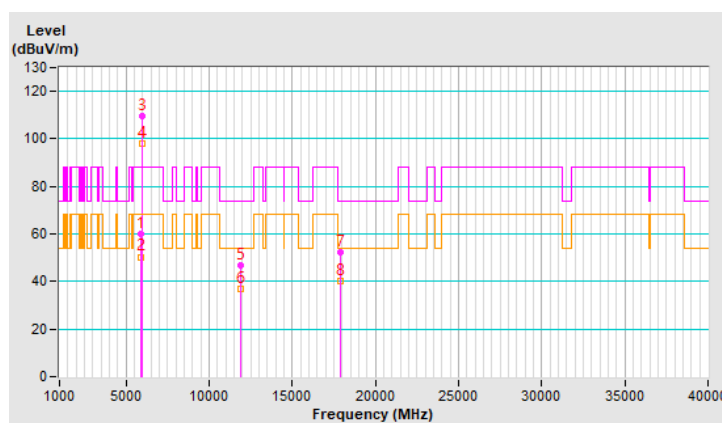


RF Mode	802.11ax (HE40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.3 PK	88.2	-19.9	3.47 V	79	66.8	1.5
2	#5925.00	56.7 AV	68.2	-11.5	3.47 V	79	55.2	1.5
3	*5965.00	115.7 PK			3.47 V	79	114.1	1.6
4	*5965.00	107.1 AV			3.47 V	79	105.5	1.6
5	11930.00	43.9 PK	74.0	-30.1	2.97 V	299	32.8	11.1
6	11930.00	34.9 AV	54.0	-19.1	2.97 V	299	23.8	11.1
7	17895.00	52.5 PK	74.0	-21.5	2.17 V	203	29.7	22.8
8	17895.00	40.9 AV	54.0	-13.1	2.17 V	203	18.1	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

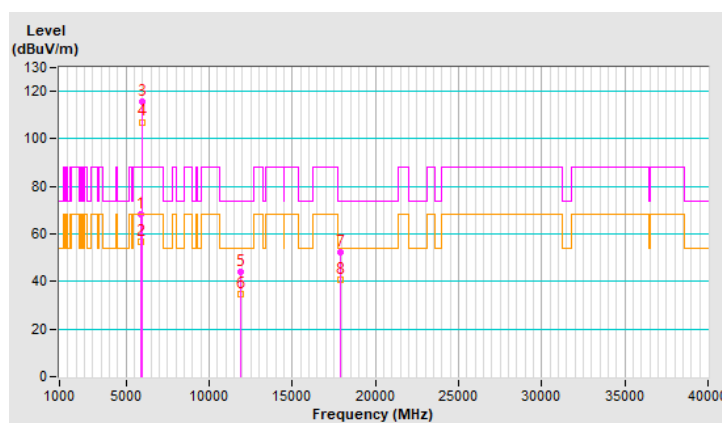


RF Mode	802.11ax (HE40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	109.3 PK			2.28 H	195	107.4	1.9
2	*6165.00	97.4 AV			2.28 H	195	95.5	1.9
3	12330.00	45.9 PK	74.0	-28.1	2.69 H	190	35.8	10.1
4	12330.00	36.6 AV	54.0	-17.4	2.69 H	190	26.5	10.1
5	18495.00	52.2 PK	74.0	-21.8	1.73 H	234	58.9	-6.7
6	18495.00	40.2 AV	54.0	-13.8	1.73 H	234	46.9	-6.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

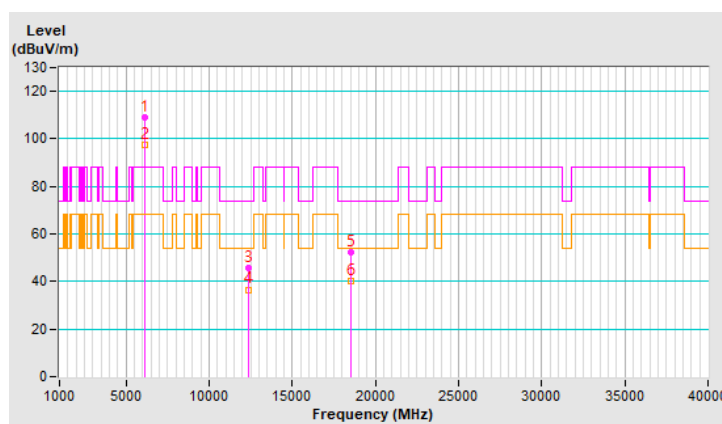


RF Mode	802.11ax (HE40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	115.6 PK			3.41 V	82	113.7	1.9
2	*6165.00	106.9 AV			3.41 V	82	105.0	1.9
3	12330.00	43.3 PK	74.0	-30.7	2.86 V	317	33.2	10.1
4	12330.00	34.2 AV	54.0	-19.8	2.86 V	317	24.1	10.1
5	18495.00	51.9 PK	74.0	-22.1	2.12 V	211	58.6	-6.7
6	18495.00	40.3 AV	54.0	-13.7	2.12 V	211	47.0	-6.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

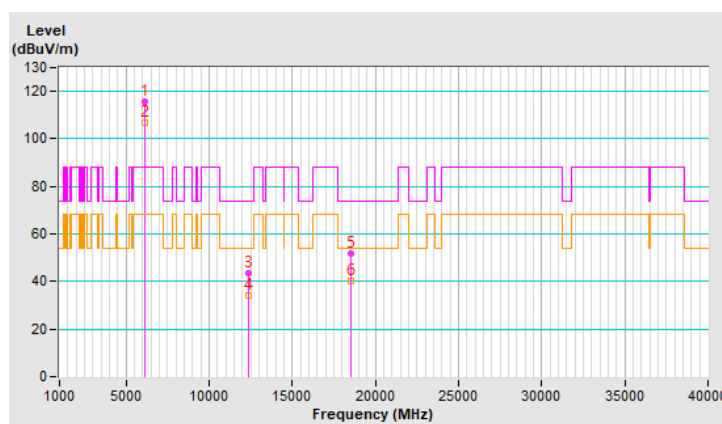


RF Mode	802.11ax (HE40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	109.7 PK			2.38 H	192	106.7	3.0
2	*6405.00	98.0 AV			2.38 H	192	95.0	3.0
3	#12810.00	46.1 PK	88.2	-42.1	2.62 H	197	35.6	10.5
4	#12810.00	36.8 AV	68.2	-31.4	2.62 H	197	26.3	10.5
5	19215.00	52.2 PK	74.0	-21.8	1.78 H	234	58.5	-6.3
6	19215.00	40.0 AV	54.0	-14.0	1.78 H	234	46.3	-6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

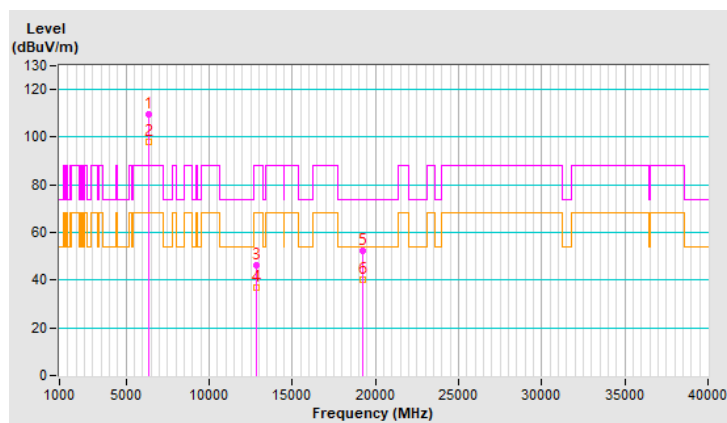


RF Mode	802.11ax (HE40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	115.3 PK			3.45 V	85	112.3	3.0
2	*6405.00	106.8 AV			3.45 V	85	103.8	3.0
3	#12810.00	43.7 PK	88.2	-44.5	2.97 V	317	33.2	10.5
4	#12810.00	34.5 AV	68.2	-33.7	2.97 V	317	24.0	10.5
5	19215.00	52.6 PK	74.0	-21.4	2.15 V	182	58.9	-6.3
6	19215.00	40.9 AV	54.0	-13.1	2.15 V	182	47.2	-6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

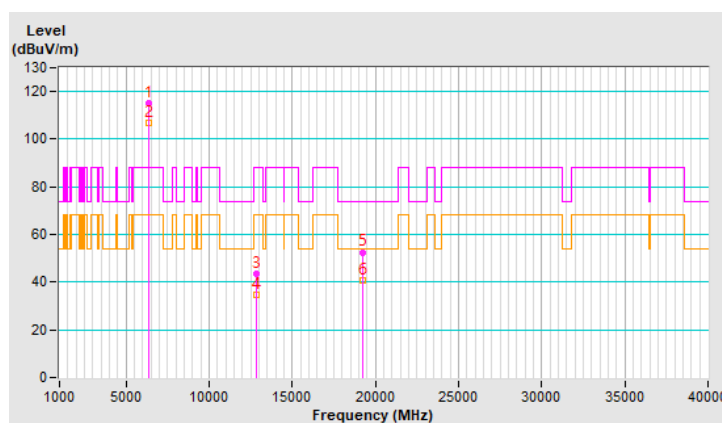


RF Mode	802.11ax (HE40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	109.8 PK			2.36 H	187	106.1	3.7
2	*6565.00	98.0 AV			2.36 H	187	94.3	3.7
3	#13130.00	46.4 PK	88.2	-41.8	2.70 H	172	35.3	11.1
4	#13130.00	37.2 AV	68.2	-31.0	2.70 H	172	26.1	11.1
5	19695.00	52.1 PK	74.0	-21.9	1.68 H	245	58.1	-6.0
6	19695.00	39.9 AV	54.0	-14.1	1.68 H	245	45.9	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

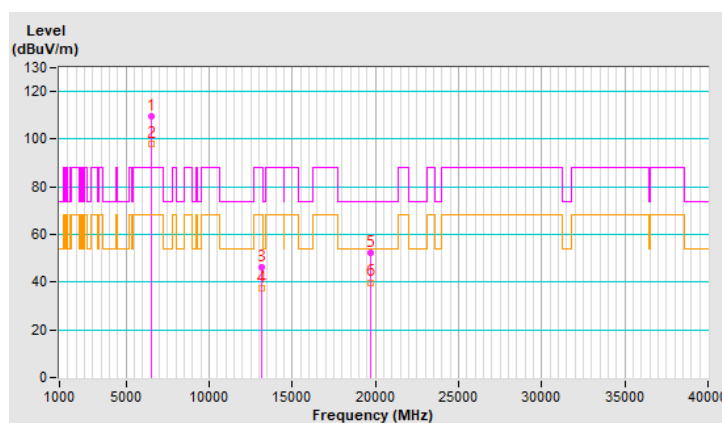


RF Mode	802.11ax (HE40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	116.0 PK			3.44 V	65	112.3	3.7
2	*6565.00	107.5 AV			3.44 V	65	103.8	3.7
3	#13130.00	43.4 PK	88.2	-44.8	2.89 V	297	32.3	11.1
4	#13130.00	34.5 AV	68.2	-33.7	2.89 V	297	23.4	11.1
5	19695.00	52.3 PK	74.0	-21.7	2.16 V	181	58.3	-6.0
6	19695.00	40.5 AV	54.0	-13.5	2.16 V	181	46.5	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

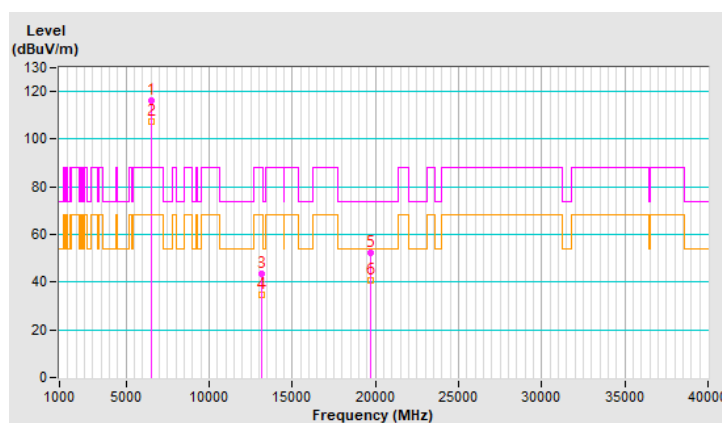


RF Mode	802.11ax (HE40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	109.6 PK			2.34 H	181	105.7	3.9
2	*6725.00	97.6 AV			2.34 H	181	93.7	3.9
3	#13450.00	46.4 PK	88.2	-41.8	2.61 H	179	34.1	12.3
4	#13450.00	37.2 AV	68.2	-31.0	2.61 H	179	24.9	12.3
5	20175.00	52.3 PK	74.0	-21.7	1.71 H	229	57.8	-5.5
6	20175.00	40.2 AV	54.0	-13.8	1.71 H	229	45.7	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

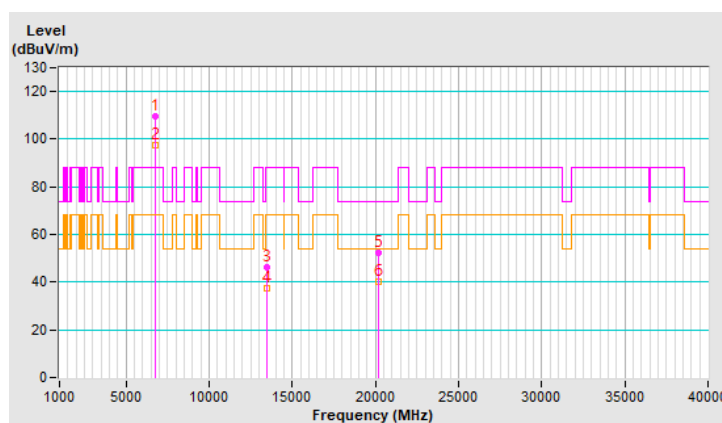


RF Mode	802.11ax (HE40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	115.9 PK			3.42 V	78	112.0	3.9
2	*6725.00	107.2 AV			3.42 V	78	103.3	3.9
3	#13450.00	43.3 PK	88.2	-44.9	2.87 V	323	31.0	12.3
4	#13450.00	34.5 AV	68.2	-33.7	2.87 V	323	22.2	12.3
5	20175.00	51.8 PK	74.0	-22.2	2.17 V	201	57.3	-5.5
6	20175.00	40.3 AV	54.0	-13.7	2.17 V	201	45.8	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

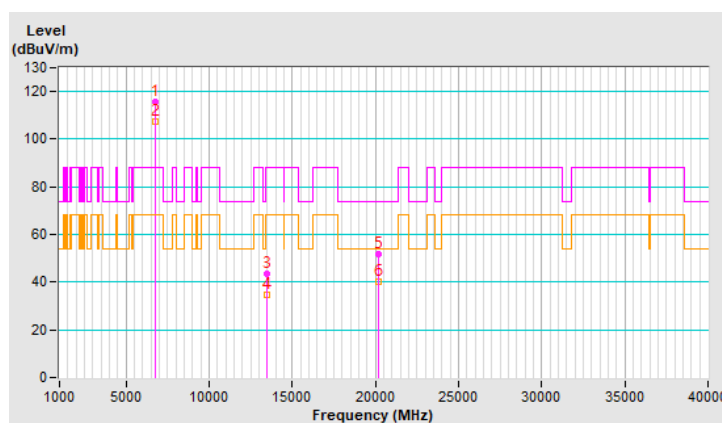


RF Mode	802.11ax (HE40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	109.6 PK			2.30 H	202	105.5	4.1
2	*6845.00	97.7 AV			2.30 H	202	93.6	4.1
3	#13690.00	46.7 PK	88.2	-41.5	2.60 H	177	33.8	12.9
4	#13690.00	37.2 AV	68.2	-31.0	2.60 H	177	24.3	12.9
5	20535.00	51.6 PK	74.0	-22.4	1.77 H	227	56.4	-4.8
6	20535.00	39.6 AV	54.0	-14.4	1.77 H	227	44.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

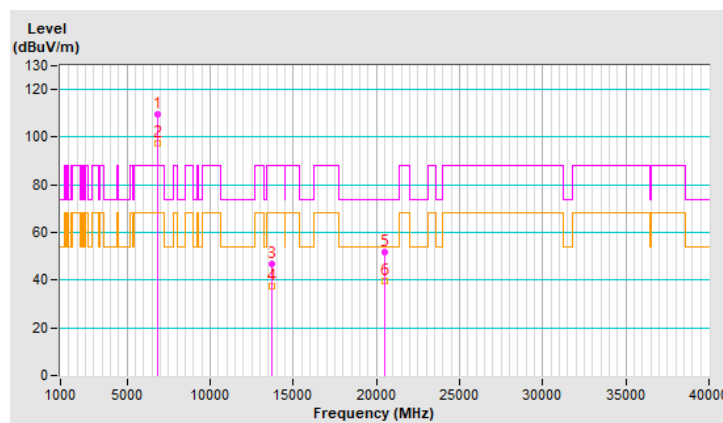


RF Mode	802.11ax (HE40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	115.8 PK			3.50 V	79	111.7	4.1
2	*6845.00	106.9 AV			3.50 V	79	102.8	4.1
3	#13690.00	44.0 PK	88.2	-44.2	2.97 V	324	31.1	12.9
4	#13690.00	34.8 AV	68.2	-33.4	2.97 V	324	21.9	12.9
5	20535.00	51.9 PK	74.0	-22.1	2.20 V	191	56.7	-4.8
6	20535.00	40.4 AV	54.0	-13.6	2.20 V	191	45.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

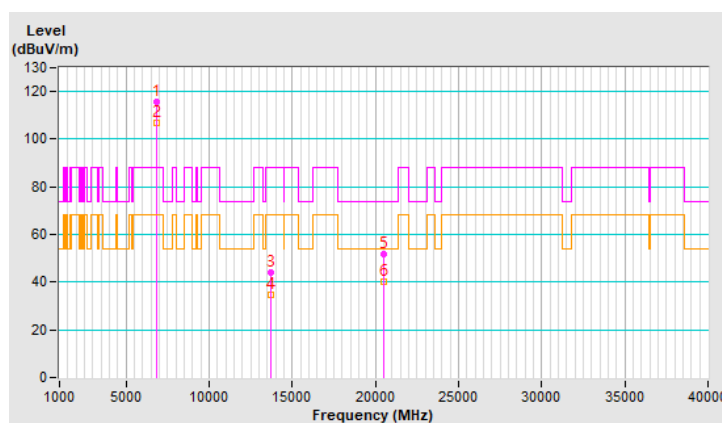


RF Mode	802.11ax (HE80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.7 PK	88.2	-25.5	1.30 H	360	61.2	1.5
2	#5925.00	52.6 AV	68.2	-15.6	1.30 H	360	51.1	1.5
3	*5985.00	105.2 PK			1.30 H	360	103.6	1.6
4	*5985.00	93.0 AV			1.30 H	360	91.4	1.6
5	11970.00	46.9 PK	74.0	-27.1	2.64 H	198	35.9	11.0
6	11970.00	37.4 AV	54.0	-16.6	2.64 H	198	26.4	11.0
7	17955.00	52.3 PK	74.0	-21.7	1.76 H	230	28.3	24.0
8	17955.00	40.2 AV	54.0	-13.8	1.76 H	230	16.2	24.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

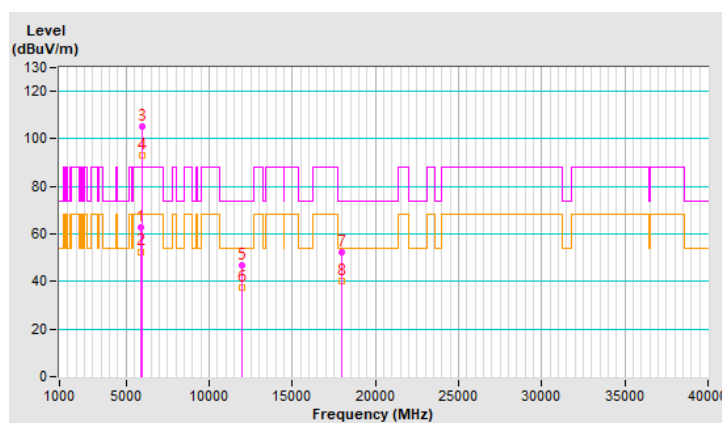


RF Mode	802.11ax (HE80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.5 PK	88.2	-15.7	1.24 V	105	71.0	1.5
2	#5925.00	61.0 AV	68.2	-7.2	1.24 V	105	59.5	1.5
3	*5985.00	114.1 PK			1.24 V	105	112.5	1.6
4	*5985.00	103.1 AV			1.24 V	105	101.5	1.6
5	11970.00	43.6 PK	74.0	-30.4	2.88 V	294	32.6	11.0
6	11970.00	34.7 AV	54.0	-19.3	2.88 V	294	23.7	11.0
7	17955.00	52.5 PK	74.0	-21.5	2.13 V	187	28.5	24.0
8	17955.00	40.8 AV	54.0	-13.2	2.13 V	187	16.8	24.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

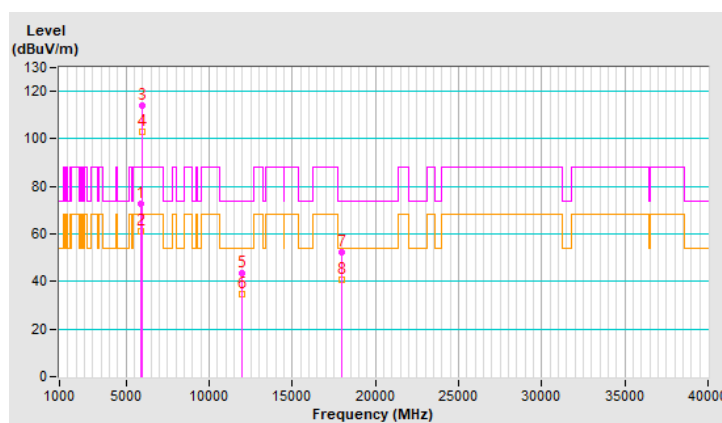


RF Mode	802.11ax (HE80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	105.2 PK			1.30 H	359	103.4	1.8
2	*6145.00	92.8 AV			1.30 H	359	91.0	1.8
3	12290.00	46.4 PK	74.0	-27.6	2.60 H	198	36.3	10.1
4	12290.00	37.0 AV	54.0	-17.0	2.60 H	198	26.9	10.1
5	18435.00	51.7 PK	74.0	-22.3	1.79 H	236	58.4	-6.7
6	18435.00	40.0 AV	54.0	-14.0	1.79 H	236	46.7	-6.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

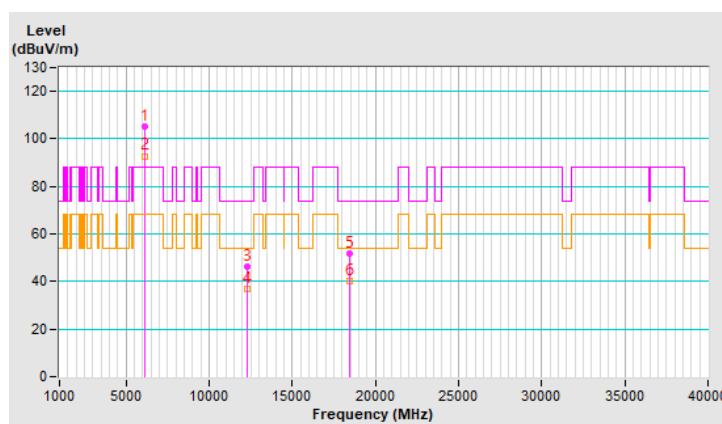


RF Mode	802.11ax (HE80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	114.2 PK			3.10 V	79	112.4	1.8
2	*6145.00	103.0 AV			3.10 V	79	101.2	1.8
3	12290.00	43.3 PK	74.0	-30.7	2.87 V	319	33.2	10.1
4	12290.00	34.3 AV	54.0	-19.7	2.87 V	319	24.2	10.1
5	18435.00	52.2 PK	74.0	-21.8	2.14 V	195	58.9	-6.7
6	18435.00	40.4 AV	54.0	-13.6	2.14 V	195	47.1	-6.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

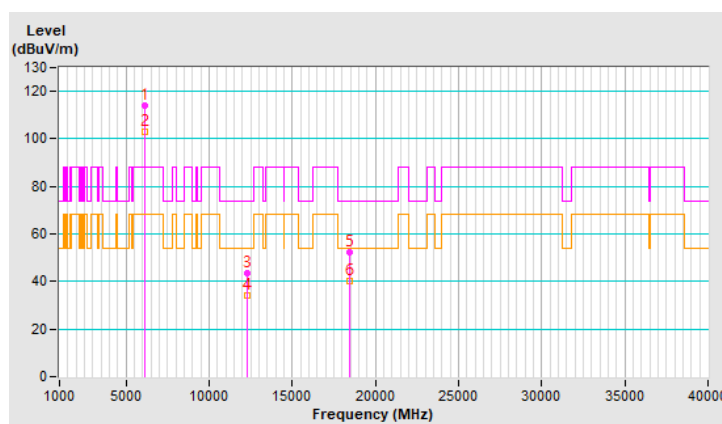


RF Mode	802.11ax (HE80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	105.4 PK			1.29 H	359	102.4	3.0
2	*6385.00	93.1 AV			1.29 H	359	90.1	3.0
3	#12770.00	46.0 PK	88.2	-42.2	2.66 H	183	35.6	10.4
4	#12770.00	36.7 AV	68.2	-31.5	2.66 H	183	26.3	10.4
5	19155.00	51.7 PK	74.0	-22.3	1.76 H	240	58.0	-6.3
6	19155.00	39.8 AV	54.0	-14.2	1.76 H	240	46.1	-6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

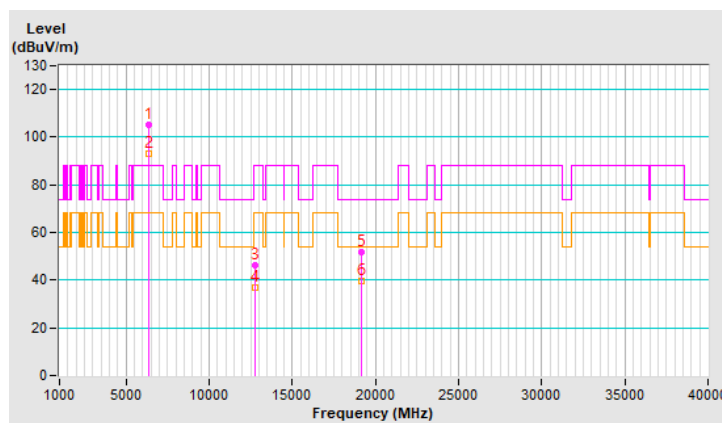


RF Mode	802.11ax (HE80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	113.9 PK			3.08 V	70	110.9	3.0
2	*6385.00	103.0 AV			3.08 V	70	100.0	3.0
3	#12770.00	43.7 PK	88.2	-44.5	2.93 V	294	33.3	10.4
4	#12770.00	34.7 AV	68.2	-33.5	2.93 V	294	24.3	10.4
5	19155.00	52.3 PK	74.0	-21.7	2.21 V	191	58.6	-6.3
6	19155.00	40.8 AV	54.0	-13.2	2.21 V	191	47.1	-6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

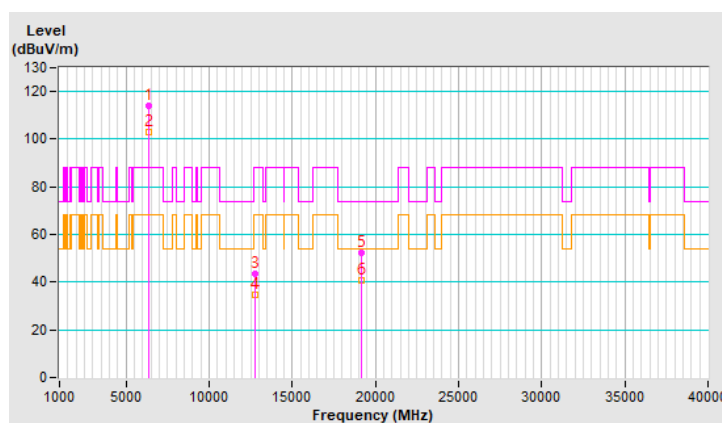


RF Mode	802.11ax (HE80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	105.7 PK			1.35 H	340	101.9	3.8
2	*6625.00	93.3 AV			1.35 H	340	89.5	3.8
3	13250.00	46.0 PK	74.0	-28.0	2.62 H	191	34.6	11.4
4	13250.00	36.8 AV	54.0	-17.2	2.62 H	191	25.4	11.4
5	19875.00	52.0 PK	74.0	-22.0	1.72 H	247	57.9	-5.9
6	19875.00	40.3 AV	54.0	-13.7	1.72 H	247	46.2	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

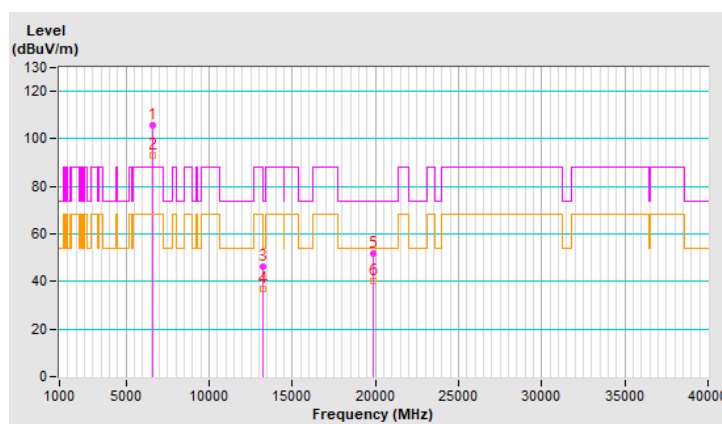


RF Mode	802.11ax (HE80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	113.7 PK			3.15 V	76	109.9	3.8
2	*6625.00	102.5 AV			3.15 V	76	98.7	3.8
3	13250.00	43.5 PK	74.0	-30.5	2.95 V	322	32.1	11.4
4	13250.00	34.2 AV	54.0	-19.8	2.95 V	322	22.8	11.4
5	19875.00	52.2 PK	74.0	-21.8	2.13 V	205	58.1	-5.9
6	19875.00	40.8 AV	54.0	-13.2	2.13 V	205	46.7	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

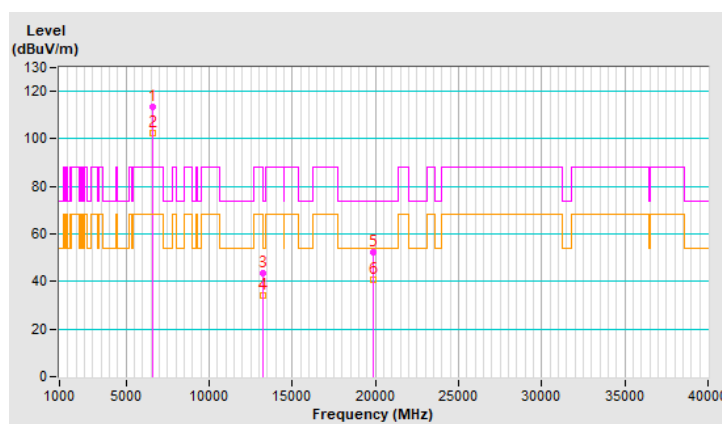


RF Mode	802.11ax (HE80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.4 PK			1.34 H	360	101.6	3.8
2	*6705.00	93.3 AV			1.34 H	360	89.5	3.8
3	#13410.00	46.0 PK	88.2	-42.2	2.59 H	199	33.8	12.2
4	#13410.00	36.8 AV	68.2	-31.4	2.59 H	199	24.6	12.2
5	20115.00	51.9 PK	74.0	-22.1	1.71 H	221	57.3	-5.4
6	20115.00	39.7 AV	54.0	-14.3	1.71 H	221	45.1	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

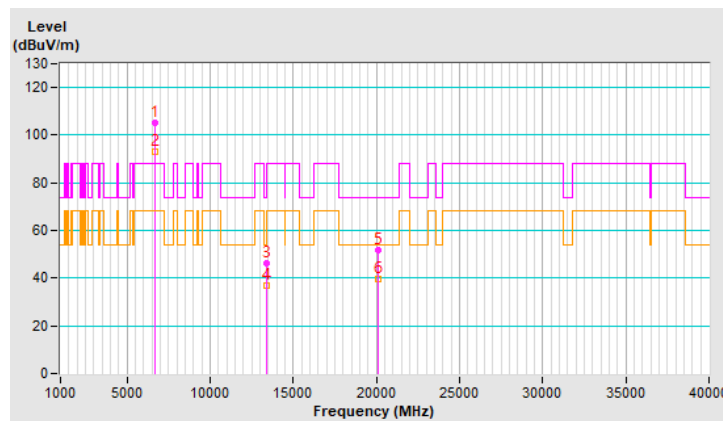


RF Mode	802.11ax (HE80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	114.7 PK			3.06 V	75	110.9	3.8
2	*6705.00	103.5 AV			3.06 V	75	99.7	3.8
3	#13410.00	43.6 PK	88.2	-44.6	2.92 V	298	31.4	12.2
4	#13410.00	34.7 AV	68.2	-33.5	2.92 V	298	22.5	12.2
5	20115.00	52.2 PK	74.0	-21.8	2.20 V	190	57.6	-5.4
6	20115.00	40.6 AV	54.0	-13.4	2.20 V	190	46.0	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

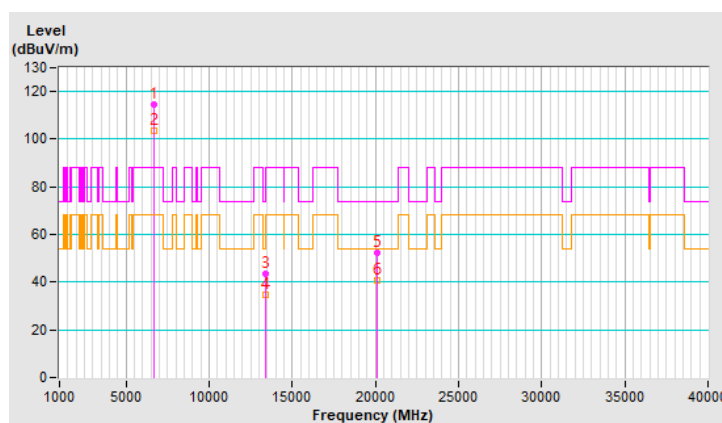


RF Mode	802.11ax (HE80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	105.3 PK			1.30 H	357	101.4	3.9
2	*6785.00	95.5 AV			1.30 H	357	91.6	3.9
3	#13570.00	46.1 PK	88.2	-42.1	2.66 H	197	33.5	12.6
4	#13570.00	36.6 AV	68.2	-31.6	2.66 H	197	24.0	12.6
5	20355.00	51.4 PK	74.0	-22.6	1.73 H	219	56.7	-5.3
6	20355.00	39.8 AV	54.0	-14.2	1.73 H	219	45.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

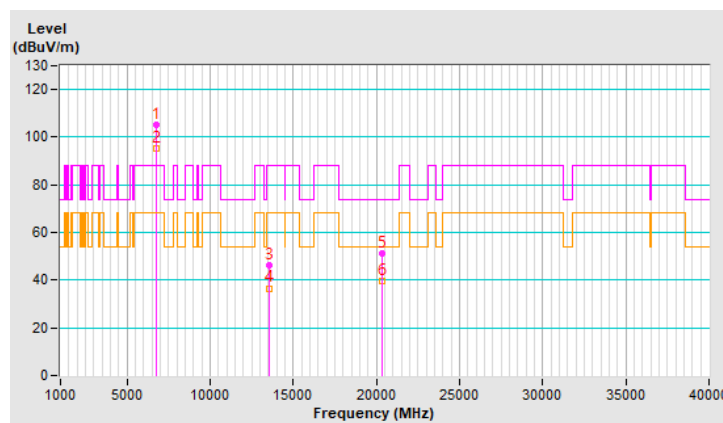


RF Mode	802.11ax (HE80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.7 PK			3.13 V	63	109.8	3.9
2	*6785.00	102.7 AV			3.13 V	63	98.8	3.9
3	#13570.00	43.8 PK	88.2	-44.4	2.86 V	320	31.2	12.6
4	#13570.00	35.0 AV	68.2	-33.2	2.86 V	320	22.4	12.6
5	20355.00	51.5 PK	74.0	-22.5	2.16 V	188	56.8	-5.3
6	20355.00	40.1 AV	54.0	-13.9	2.16 V	188	45.4	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

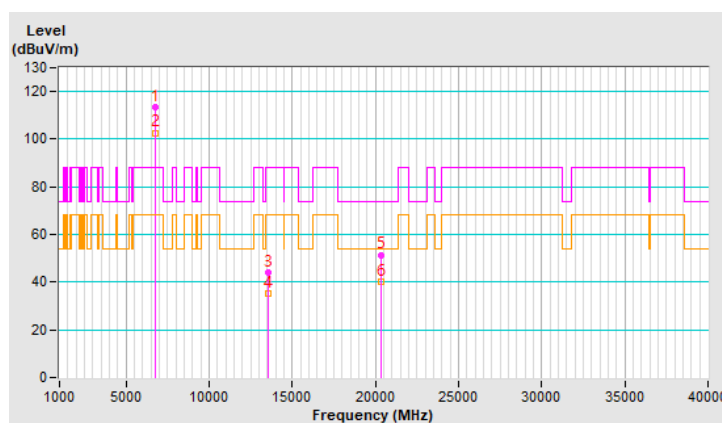


1T1S

RF Mode	802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.2 PK	88.2	-17.0	1.32 H	185	69.7	1.5
2	#5925.00	60.1 AV	68.2	-8.1	1.32 H	185	58.6	1.5
3	*6025.00	97.0 PK			1.32 H	185	95.2	1.8
4	*6025.00	87.8 AV			1.32 H	185	86.0	1.8
5	12050.00	50.9 PK	74.0	-23.1	1.95 H	58	39.9	11.0
6	12050.00	41.8 AV	54.0	-12.2	1.95 H	58	30.8	11.0
7	18075.00	56.9 PK	74.0	-17.1	1.54 H	237	50.5	6.4
8	18075.00	45.2 AV	54.0	-8.8	1.54 H	237	38.8	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

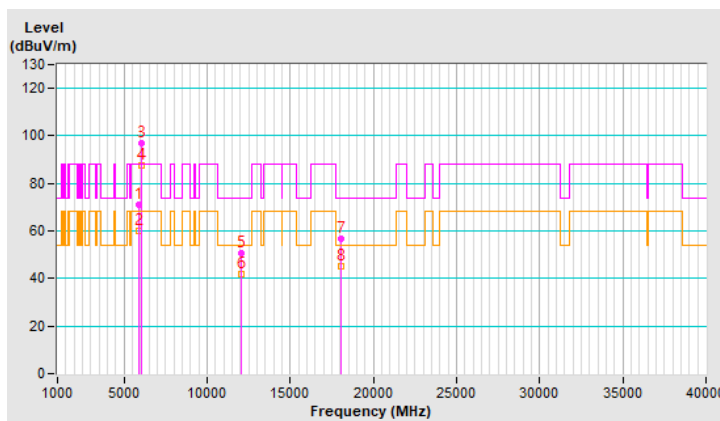


RF Mode	802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.6 PK	88.2	-8.6	1.78 V	236	78.1	1.5
2	#5925.00	67.5 AV	68.2	-0.7	1.78 V	236	66.0	1.5
3	*6025.00	102.6 PK			1.78 V	236	100.8	1.8
4	*6025.00	93.8 AV			1.78 V	236	92.0	1.8
5	12050.00	50.1 PK	74.0	-23.9	1.24 V	226	39.1	11.0
6	12050.00	40.2 AV	54.0	-13.8	1.24 V	226	29.2	11.0
7	18075.00	55.2 PK	74.0	-18.8	2.45 V	328	48.8	6.4
8	18075.00	43.6 AV	54.0	-10.4	2.45 V	328	37.2	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

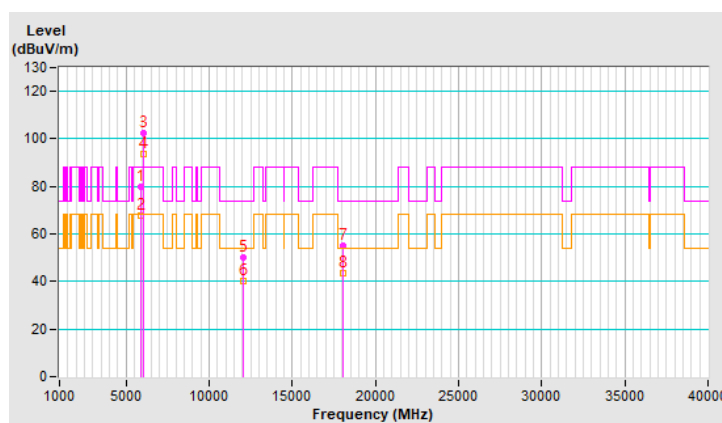


RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	102.8 PK			1.45 H	171	100.8	2.0
2	*6185.00	92.3 AV			1.45 H	171	90.3	2.0
3	12370.00	50.4 PK	74.0	-23.6	1.94 H	70	40.3	10.1
4	12370.00	41.3 AV	54.0	-12.7	1.94 H	70	31.2	10.1
5	18555.00	59.0 PK	74.0	-15.0	1.61 H	113	65.5	-6.5
6	18555.00	47.2 AV	54.0	-6.8	1.61 H	113	53.7	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

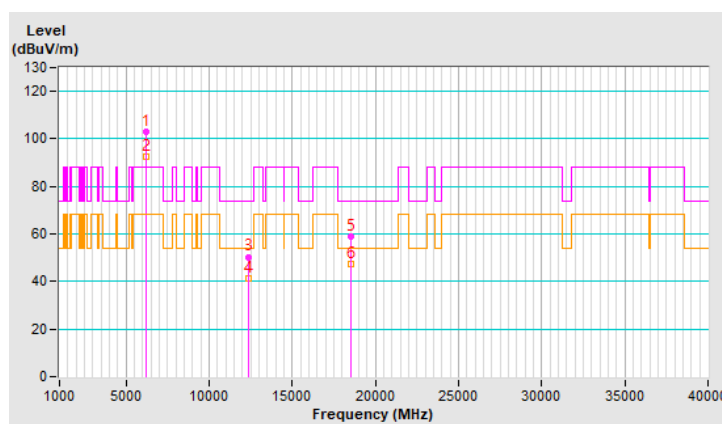


RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.7 PK			1.67 V	241	103.7	2.0
2	*6185.00	96.1 AV			1.67 V	241	94.1	2.0
3	12370.00	49.6 PK	74.0	-24.4	1.30 V	193	39.5	10.1
4	12370.00	40.1 AV	54.0	-13.9	1.30 V	193	30.0	10.1
5	18555.00	57.6 PK	74.0	-16.4	2.58 V	317	64.1	-6.5
6	18555.00	45.6 AV	54.0	-8.4	2.58 V	317	52.1	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

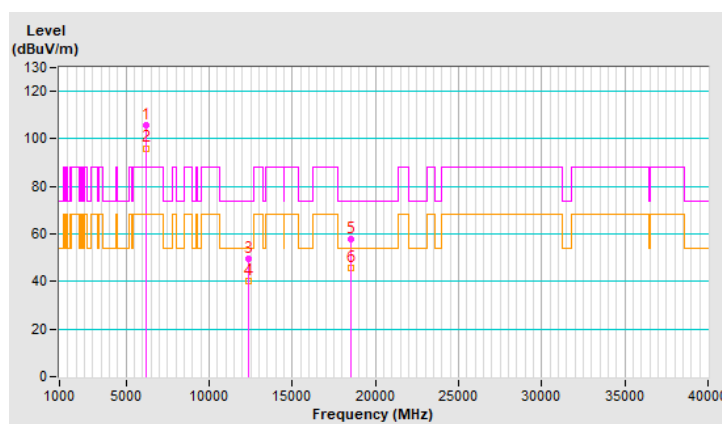


RF Mode	802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	101.6 PK			1.46 H	186	98.7	2.9
2	*6345.00	91.5 AV			1.46 H	186	88.6	2.9
3	12690.00	50.0 PK	74.0	-24.0	1.92 H	66	39.8	10.2
4	12690.00	41.1 AV	54.0	-12.9	1.92 H	66	30.9	10.2
5	19035.00	58.4 PK	74.0	-15.6	1.62 H	128	64.9	-6.5
6	19035.00	46.8 AV	54.0	-7.2	1.62 H	128	53.3	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

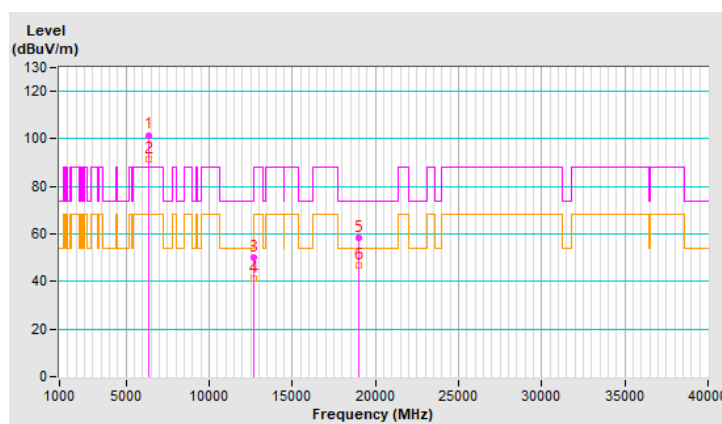


RF Mode	802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.8 PK			1.72 V	234	102.9	2.9
2	*6345.00	96.0 AV			1.72 V	234	93.1	2.9
3	12690.00	49.8 PK	74.0	-24.2	1.35 V	192	39.6	10.2
4	12690.00	40.0 AV	54.0	-14.0	1.35 V	192	29.8	10.2
5	19035.00	57.5 PK	74.0	-16.5	2.58 V	317	64.0	-6.5
6	19035.00	45.4 AV	54.0	-8.6	2.58 V	317	51.9	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

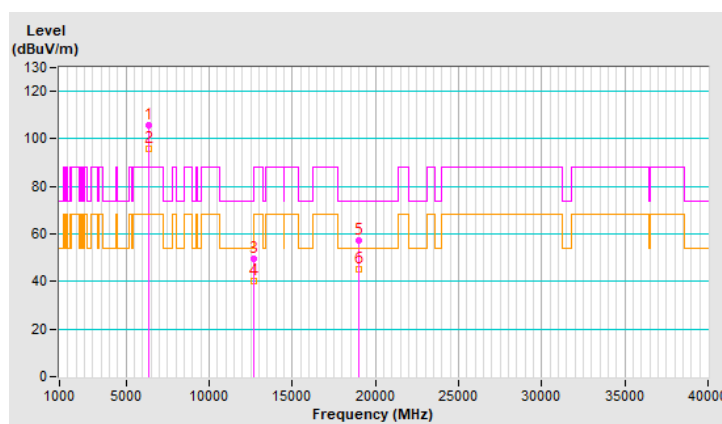


RF Mode	802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	102.3 PK			1.45 H	173	98.5	3.8
2	*6665.00	92.0 AV			1.45 H	173	88.2	3.8
3	13330.00	50.4 PK	74.0	-23.6	1.92 H	80	38.6	11.8
4	13330.00	41.2 AV	54.0	-12.8	1.92 H	80	29.4	11.8
5	19995.00	59.0 PK	74.0	-15.0	1.65 H	106	64.6	-5.6
6	19995.00	46.9 AV	54.0	-7.1	1.65 H	106	52.5	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

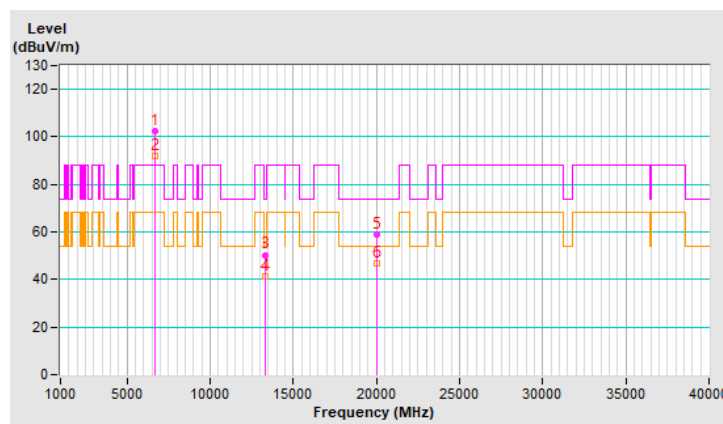


RF Mode	802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.8 PK			1.67 V	255	102.0	3.8
2	*6665.00	96.0 AV			1.67 V	255	92.2	3.8
3	13330.00	49.3 PK	74.0	-24.7	1.34 V	194	37.5	11.8
4	13330.00	39.5 AV	54.0	-14.5	1.34 V	194	27.7	11.8
5	19995.00	57.1 PK	74.0	-16.9	2.57 V	308	62.7	-5.6
6	19995.00	45.1 AV	54.0	-8.9	2.57 V	308	50.7	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

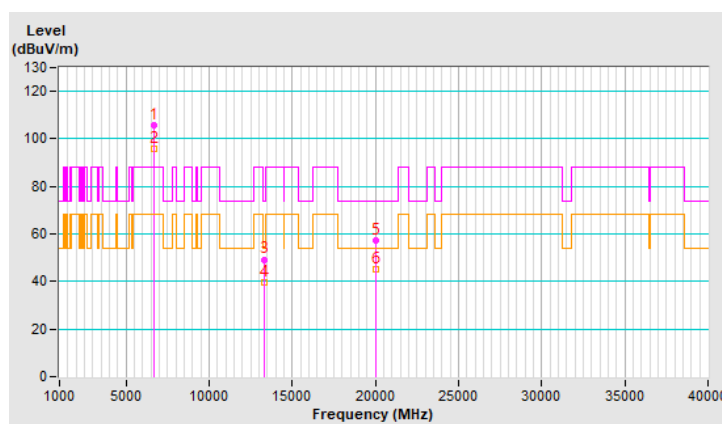


2T1S

RF Mode	802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.7 PK	88.2	-14.5	1.47 H	344	72.2	1.5
2	#5925.00	59.4 AV	68.2	-8.8	1.47 H	344	57.9	1.5
3	*6025.00	100.2 PK			1.47 H	344	98.4	1.8
4	*6025.00	91.5 AV			1.47 H	344	89.7	1.8
5	12050.00	47.1 PK	74.0	-26.9	2.59 H	192	36.1	11.0
6	12050.00	37.3 AV	54.0	-16.7	2.59 H	192	26.3	11.0
7	18075.00	51.5 PK	74.0	-22.5	1.71 H	221	45.1	6.4
8	18075.00	39.8 AV	54.0	-14.2	1.71 H	221	33.4	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

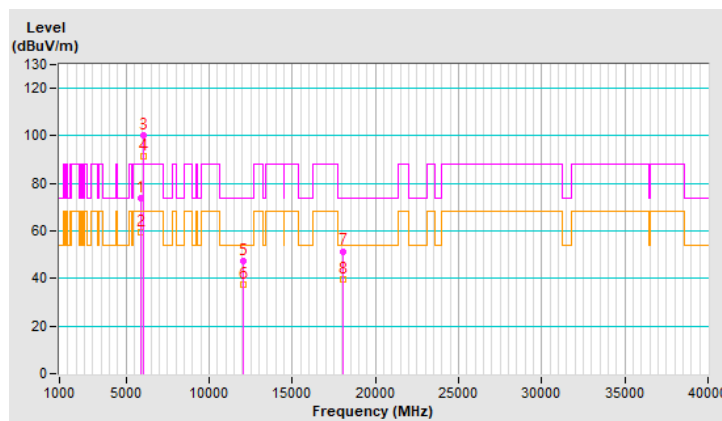


RF Mode	802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.9 PK	88.2	-12.3	3.16 V	72	74.4	1.5
2	#5925.00	67.5 AV	68.2	-0.7	3.16 V	72	66.0	1.5
3	*6025.00	107.1 PK			3.16 V	72	105.3	1.8
4	*6025.00	97.7 AV			3.16 V	72	95.9	1.8
5	12050.00	43.6 PK	74.0	-30.4	2.96 V	307	32.6	11.0
6	12050.00	34.3 AV	54.0	-19.7	2.96 V	307	23.3	11.0
7	18075.00	52.2 PK	74.0	-21.8	2.21 V	191	45.8	6.4
8	18075.00	40.4 AV	54.0	-13.6	2.21 V	191	34.0	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

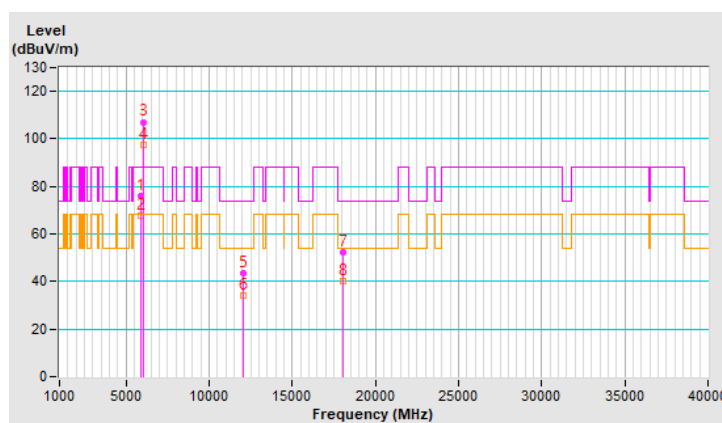


RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	103.5 PK			1.42 H	335	101.5	2.0
2	*6185.00	93.4 AV			1.42 H	335	91.4	2.0
3	12370.00	46.3 PK	74.0	-27.7	2.65 H	189	36.2	10.1
4	12370.00	36.8 AV	54.0	-17.2	2.65 H	189	26.7	10.1
5	18555.00	52.2 PK	74.0	-21.8	1.76 H	240	58.7	-6.5
6	18555.00	40.5 AV	54.0	-13.5	1.76 H	240	47.0	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

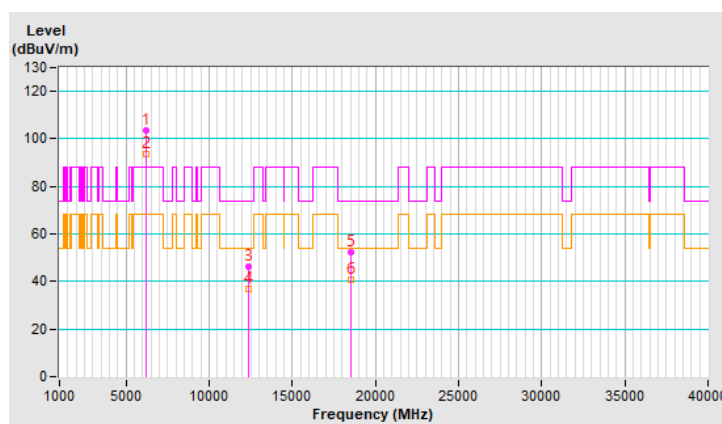


RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	109.7 PK			3.17 V	69	107.7	2.0
2	*6185.00	100.4 AV			3.17 V	69	98.4	2.0
3	12370.00	43.8 PK	74.0	-30.2	2.92 V	297	33.7	10.1
4	12370.00	34.4 AV	54.0	-19.6	2.92 V	297	24.3	10.1
5	18555.00	52.1 PK	74.0	-21.9	2.19 V	187	58.6	-6.5
6	18555.00	40.6 AV	54.0	-13.4	2.19 V	187	47.1	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

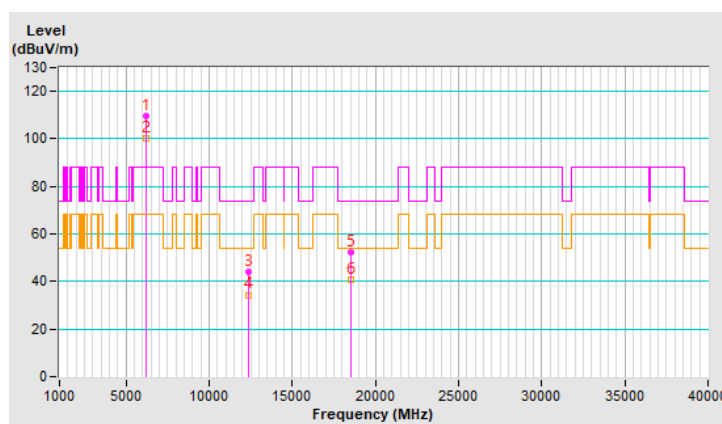


RF Mode	802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.6 PK			1.41 H	333	102.7	2.9
2	*6345.00	94.5 AV			1.41 H	333	91.6	2.9
3	12690.00	46.1 PK	74.0	-27.9	2.62 H	183	35.9	10.2
4	12690.00	36.7 AV	54.0	-17.3	2.62 H	183	26.5	10.2
5	19035.00	52.4 PK	74.0	-21.6	1.77 H	233	58.9	-6.5
6	19035.00	40.6 AV	54.0	-13.4	1.77 H	233	47.1	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

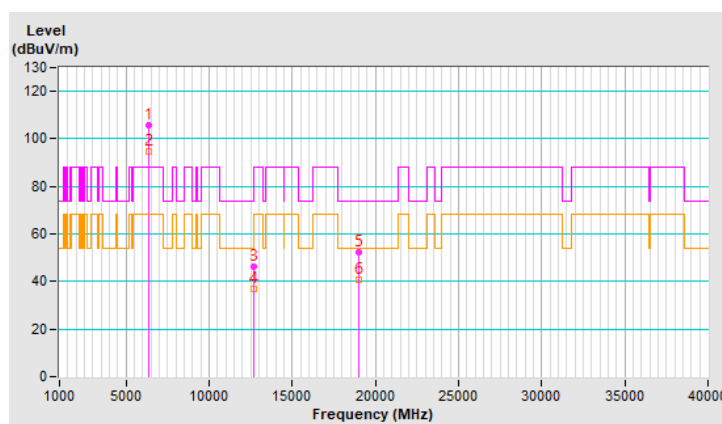


RF Mode	802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.1 PK			3.17 V	65	107.2	2.9
2	*6345.00	101.1 AV			3.17 V	65	98.2	2.9
3	12690.00	43.9 PK	74.0	-30.1	2.86 V	318	33.7	10.2
4	12690.00	34.6 AV	54.0	-19.4	2.86 V	318	24.4	10.2
5	19035.00	51.7 PK	74.0	-22.3	2.16 V	181	58.2	-6.5
6	19035.00	40.0 AV	54.0	-14.0	2.16 V	181	46.5	-6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

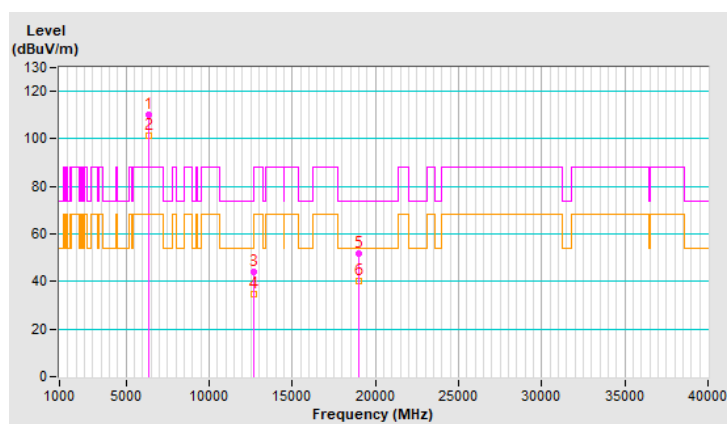


RF Mode	802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.1 PK			1.44 H	336	102.3	3.8
2	*6665.00	96.1 AV			1.44 H	336	92.3	3.8
3	13330.00	46.5 PK	74.0	-27.5	2.69 H	170	34.7	11.8
4	13330.00	37.0 AV	54.0	-17.0	2.69 H	170	25.2	11.8
5	19995.00	52.0 PK	74.0	-22.0	1.77 H	242	57.6	-5.6
6	19995.00	39.8 AV	54.0	-14.2	1.77 H	242	45.4	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

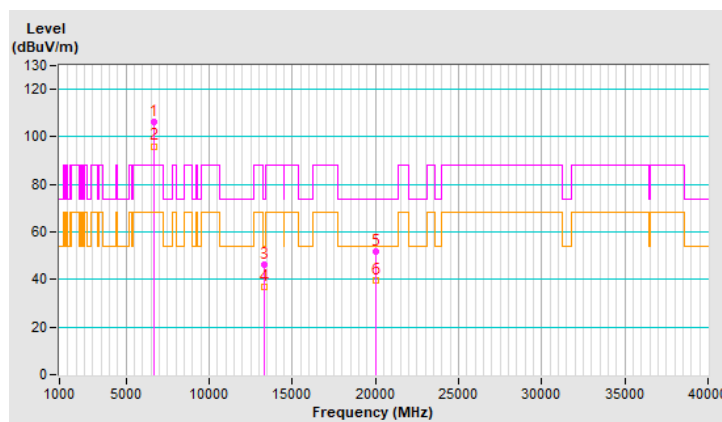


RF Mode	802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	113.4 PK			3.20 V	62	109.6	3.8
2	*6665.00	103.1 AV			3.20 V	62	99.3	3.8
3	13330.00	43.5 PK	74.0	-30.5	2.96 V	315	31.7	11.8
4	13330.00	34.6 AV	54.0	-19.4	2.96 V	315	22.8	11.8
5	19995.00	51.8 PK	74.0	-22.2	2.17 V	202	57.4	-5.6
6	19995.00	40.1 AV	54.0	-13.9	2.17 V	202	45.7	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

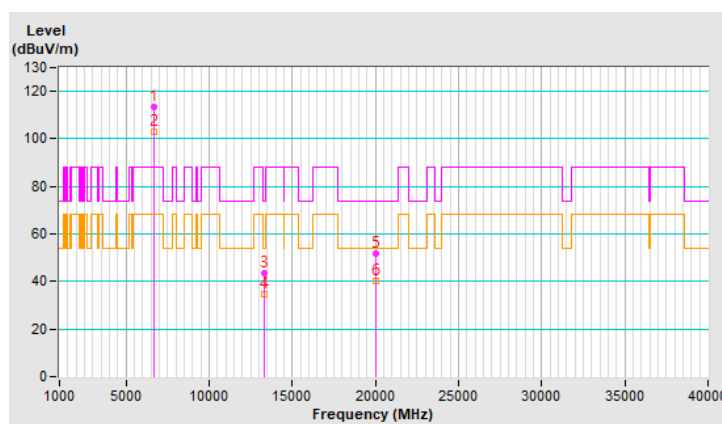


2T1S

RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5911.80	80.5 PK	88.2	-7.7	1.01 H	216	79.0	1.5
2	#5911.80	62.1 AV	68.2	-6.1	1.01 H	216	60.6	1.5
3	*5955.00	122.7 PK			1.01 H	216	121.1	1.6
4	*5955.00	110.8 AV			1.01 H	216	109.2	1.6
5	11910.00	62.2 PK	74.0	-11.8	1.02 H	247	51.1	11.1
6	11910.00	52.2 AV	54.0	-1.8	1.02 H	247	41.1	11.1
7	17865.00	54.2 PK	74.0	-19.8	1.67 H	274	32.1	22.1
8	17865.00	44.4 AV	54.0	-9.6	1.67 H	274	22.3	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

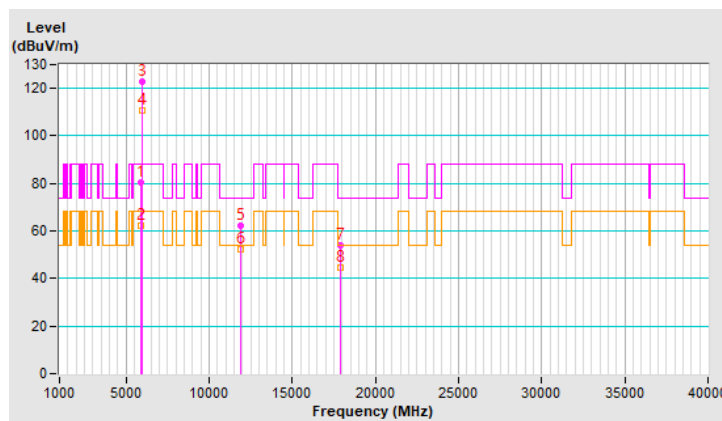


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5912.20	86.2 PK	88.2	-2.0	1.45 V	211	84.7	1.5
2	#5912.20	67.9 AV	68.2	-0.3	1.45 V	211	66.4	1.5
3	*5955.00	127.4 PK			1.45 V	211	125.8	1.6
4	*5955.00	118.4 AV			1.45 V	211	116.8	1.6
5	11910.00	61.9 PK	74.0	-12.1	1.25 V	294	50.8	11.1
6	11910.00	53.5 AV	54.0	-0.5	1.25 V	294	42.4	11.1
7	17865.00	58.5 PK	74.0	-15.5	2.09 V	201	36.4	22.1
8	17865.00	46.8 AV	54.0	-7.2	2.09 V	201	24.7	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

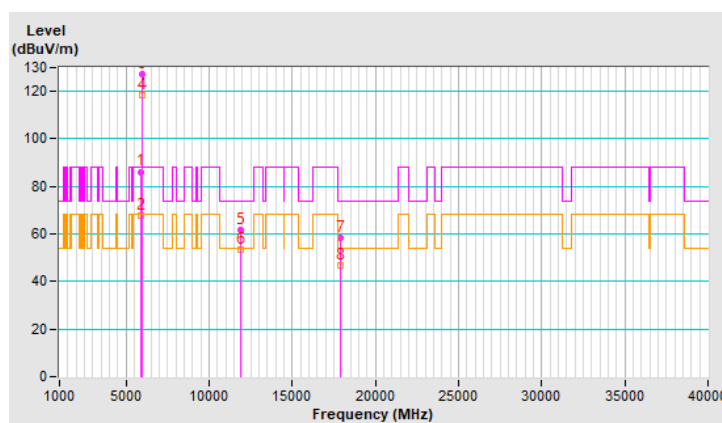


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.9 PK			1.00 H	221	118.9	3.0
2	*6415.00	110.3 AV			1.00 H	221	107.3	3.0
3	#12830.00	61.8 PK	88.2	-26.4	1.10 H	233	51.2	10.6
4	#12830.00	52.2 AV	68.2	-16.0	1.10 H	233	41.6	10.6
5	19245.00	54.0 PK	74.0	-20.0	1.63 H	281	60.4	-6.4
6	19245.00	44.2 AV	54.0	-9.8	1.63 H	281	50.6	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

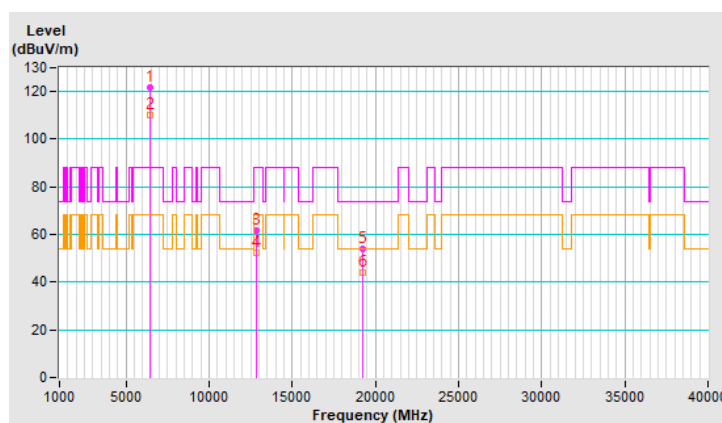


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	127.7 PK			1.48 V	212	124.7	3.0
2	*6415.00	118.7 AV			1.48 V	212	115.7	3.0
3	#12830.00	62.5 PK	88.2	-25.7	1.13 V	258	51.9	10.6
4	#12830.00	53.5 AV	68.2	-14.7	1.13 V	258	42.9	10.6
5	19245.00	59.3 PK	74.0	-14.7	2.06 V	187	65.7	-6.4
6	19245.00	47.3 AV	54.0	-6.7	2.06 V	187	53.7	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

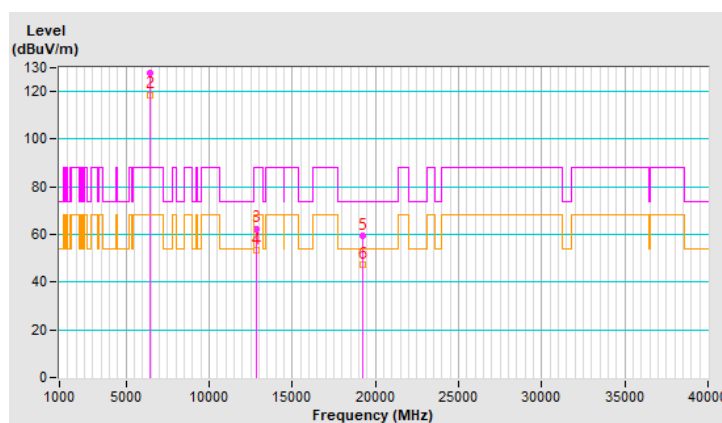


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.2 PK			1.04 H	200	119.6	3.6
2	*6535.00	111.3 AV			1.04 H	200	107.7	3.6
3	#13070.00	61.6 PK	88.2	-26.6	1.03 H	255	50.8	10.8
4	#13070.00	51.9 AV	68.2	-16.3	1.03 H	255	41.1	10.8
5	19605.00	54.1 PK	74.0	-19.9	1.71 H	273	60.1	-6.0
6	19605.00	44.3 AV	54.0	-9.7	1.71 H	273	50.3	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

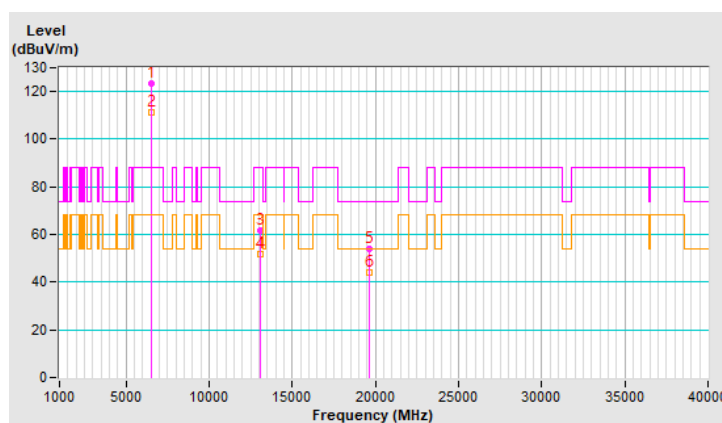


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	127.8 PK			1.46 V	209	124.2	3.6
2	*6535.00	118.8 AV			1.46 V	209	115.2	3.6
3	#13070.00	61.9 PK	88.2	-26.3	1.19 V	214	51.1	10.8
4	#13070.00	53.5 AV	68.2	-14.7	1.19 V	214	42.7	10.8
5	19605.00	58.1 PK	74.0	-15.9	2.05 V	198	64.1	-6.0
6	19605.00	46.4 AV	54.0	-7.6	2.05 V	198	52.4	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

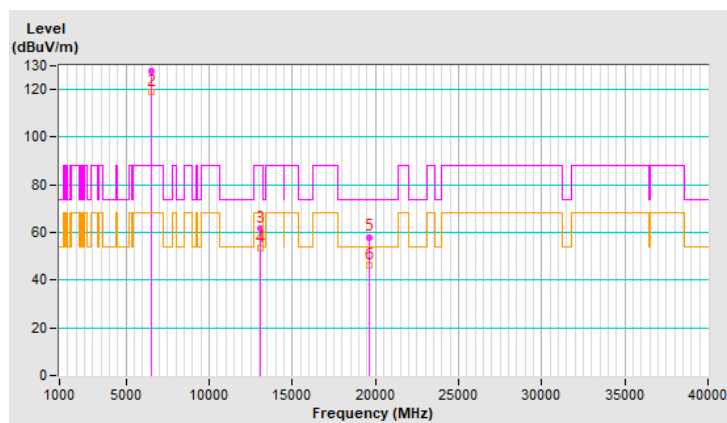


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	123.1 PK			1.06 H	221	119.0	4.1
2	*6855.00	111.2 AV			1.06 H	221	107.1	4.1
3	#13710.00	61.7 PK	88.2	-26.5	1.00 H	255	48.8	12.9
4	#13710.00	52.3 AV	68.2	-15.9	1.00 H	255	39.4	12.9
5	20565.00	53.8 PK	74.0	-20.2	1.67 H	267	58.6	-4.8
6	20565.00	44.0 AV	54.0	-10.0	1.67 H	267	48.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

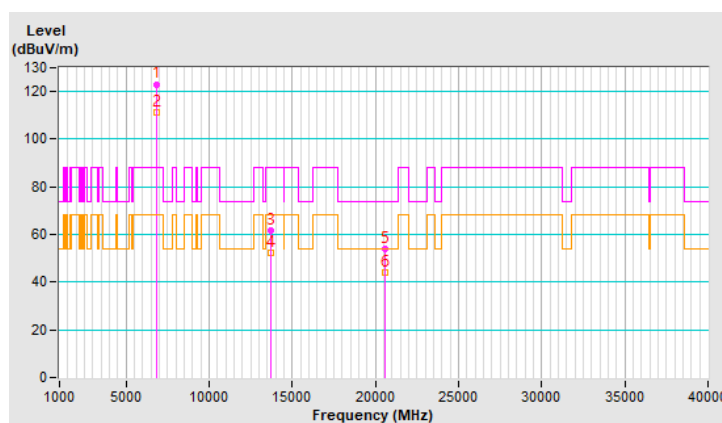


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	127.2 PK			1.45 V	201	123.1	4.1
2	*6855.00	118.3 AV			1.45 V	201	114.2	4.1
3	#13710.00	62.2 PK	88.2	-26.0	1.17 V	224	49.3	12.9
4	#13710.00	53.5 AV	68.2	-14.7	1.17 V	224	40.6	12.9
5	20565.00	59.0 PK	74.0	-15.0	2.11 V	208	63.8	-4.8
6	20565.00	47.2 AV	54.0	-6.8	2.11 V	208	52.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

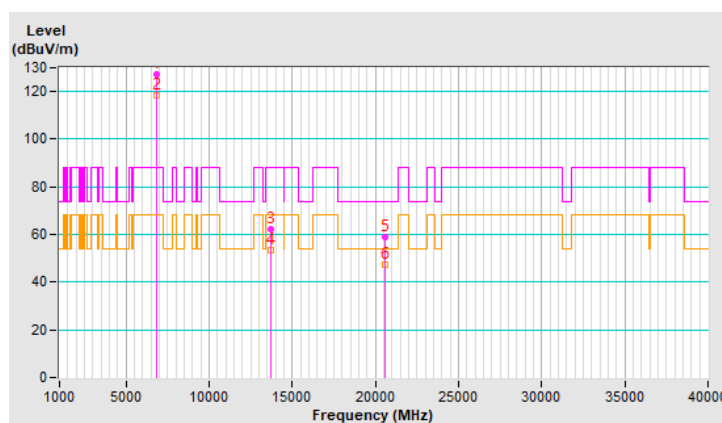


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5915.61	74.3 PK	88.2	-13.9	1.11 H	209	72.8	1.5
2	#5915.61	60.7 AV	68.2	-7.5	1.11 H	209	59.2	1.5
3	*5955.00	120.4 PK			1.11 H	209	118.8	1.6
4	*5955.00	108.5 AV			1.11 H	209	106.9	1.6
5	11910.00	62.3 PK	74.0	-11.7	1.07 H	260	51.2	11.1
6	11910.00	52.1 AV	54.0	-1.9	1.07 H	260	41.0	11.1
7	17865.00	53.9 PK	74.0	-20.1	1.66 H	267	31.8	22.1
8	17865.00	44.3 AV	54.0	-9.7	1.66 H	267	22.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

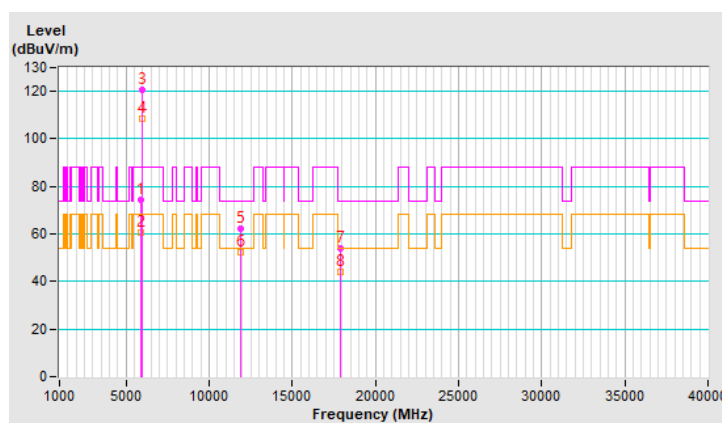


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5918.50	80.4 PK	88.2	-7.8	1.48 V	205	78.9	1.5
2	#5918.50	68.0 AV	68.2	-0.2	1.48 V	205	66.5	1.5
3	*5955.00	124.5 PK			1.48 V	205	122.9	1.6
4	*5955.00	115.4 AV			1.48 V	205	113.8	1.6
5	11910.00	61.9 PK	74.0	-12.1	1.12 V	267	50.8	11.1
6	11910.00	53.8 AV	54.0	-0.2	1.12 V	267	42.7	11.1
7	17865.00	58.8 PK	74.0	-15.2	2.11 V	187	36.7	22.1
8	17865.00	47.0 AV	54.0	-7.0	2.11 V	187	24.9	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

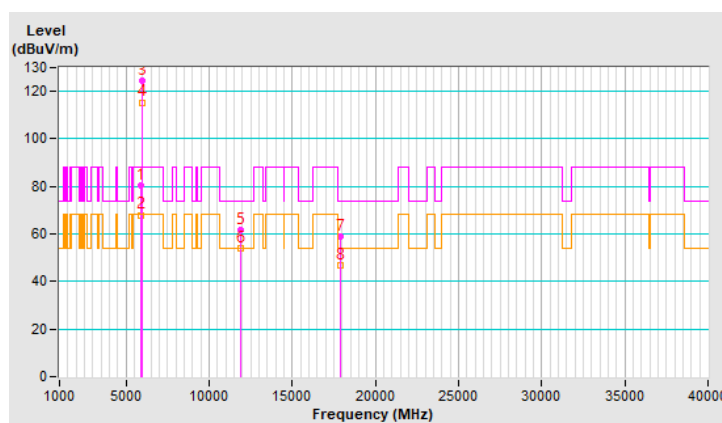


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.6 PK			1.00 H	230	117.6	3.0
2	*6415.00	108.6 AV			1.00 H	230	105.6	3.0
3	#12830.00	62.8 PK	88.2	-25.4	1.08 H	254	52.2	10.6
4	#12830.00	52.7 AV	68.2	-15.5	1.08 H	254	42.1	10.6
5	19245.00	54.6 PK	74.0	-19.4	1.68 H	273	61.0	-6.4
6	19245.00	44.9 AV	54.0	-9.1	1.68 H	273	51.3	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

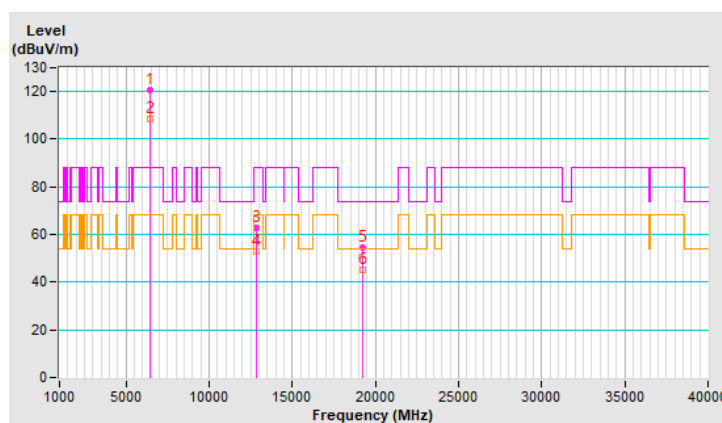


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	124.7 PK			1.51 V	223	121.7	3.0
2	*6415.00	115.6 AV			1.51 V	223	112.6	3.0
3	#12830.00	62.2 PK	88.2	-26.0	1.19 V	219	51.6	10.6
4	#12830.00	53.9 AV	68.2	-14.3	1.19 V	219	43.3	10.6
5	19245.00	58.7 PK	74.0	-15.3	2.08 V	189	65.1	-6.4
6	19245.00	46.9 AV	54.0	-7.1	2.08 V	189	53.3	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

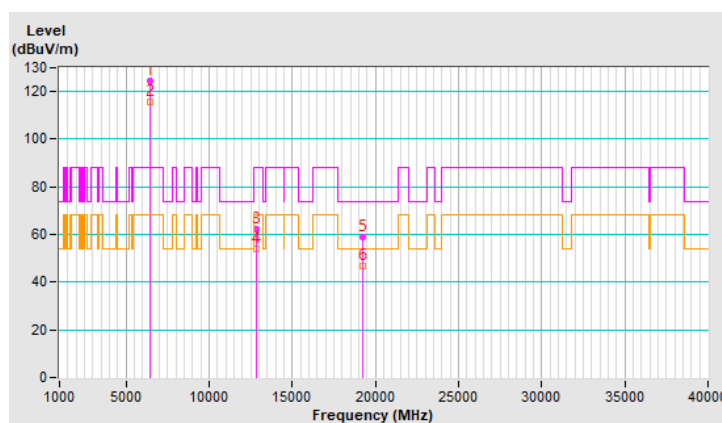


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.4 PK			1.00 H	232	116.8	3.6
2	*6535.00	108.3 AV			1.00 H	232	104.7	3.6
3	#13070.00	61.7 PK	88.2	-26.5	1.04 H	239	50.9	10.8
4	#13070.00	51.7 AV	68.2	-16.5	1.04 H	239	40.9	10.8
5	19605.00	53.8 PK	74.0	-20.2	1.73 H	263	59.8	-6.0
6	19605.00	43.9 AV	54.0	-10.1	1.73 H	263	49.9	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

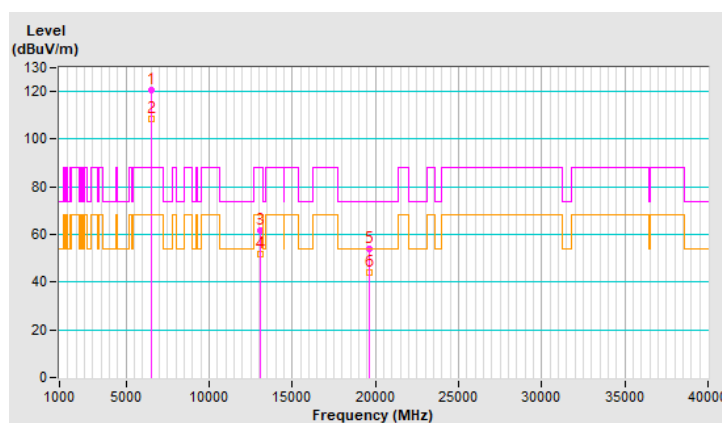


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	124.4 PK			1.50 V	207	120.8	3.6
2	*6535.00	115.7 AV			1.50 V	207	112.1	3.6
3	#13070.00	61.3 PK	88.2	-26.9	1.07 V	261	50.5	10.8
4	#13070.00	53.1 AV	68.2	-15.1	1.07 V	261	42.3	10.8
5	19605.00	58.8 PK	74.0	-15.2	2.03 V	208	64.8	-6.0
6	19605.00	47.3 AV	54.0	-6.7	2.03 V	208	53.3	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

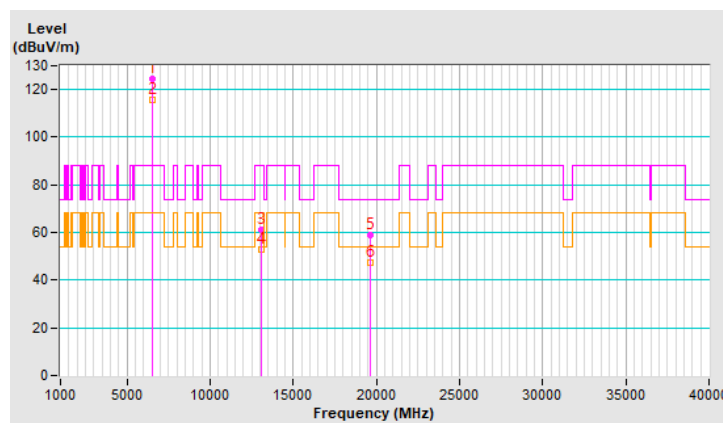


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.3 PK			1.02 H	235	112.2	4.1
2	*6855.00	108.2 AV			1.02 H	235	104.1	4.1
3	#13710.00	62.4 PK	88.2	-25.8	1.00 H	249	49.5	12.9
4	#13710.00	52.1 AV	68.2	-16.1	1.00 H	249	39.2	12.9
5	20565.00	54.6 PK	74.0	-19.4	1.70 H	264	59.4	-4.8
6	20565.00	44.6 AV	54.0	-9.4	1.70 H	264	49.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

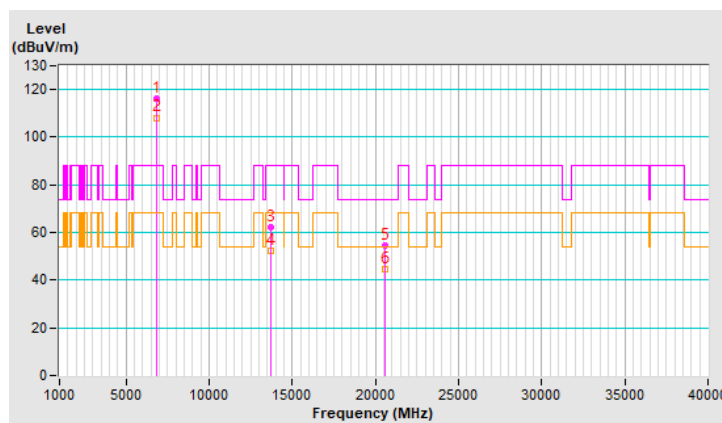


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	124.7 PK			1.51 V	222	120.6	4.1
2	*6855.00	115.5 AV			1.51 V	222	111.4	4.1
3	#13710.00	61.7 PK	88.2	-26.5	1.23 V	223	48.8	12.9
4	#13710.00	53.2 AV	68.2	-15.0	1.23 V	223	40.3	12.9
5	20565.00	58.2 PK	74.0	-15.8	2.15 V	187	63.0	-4.8
6	20565.00	46.6 AV	54.0	-7.4	2.15 V	187	51.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

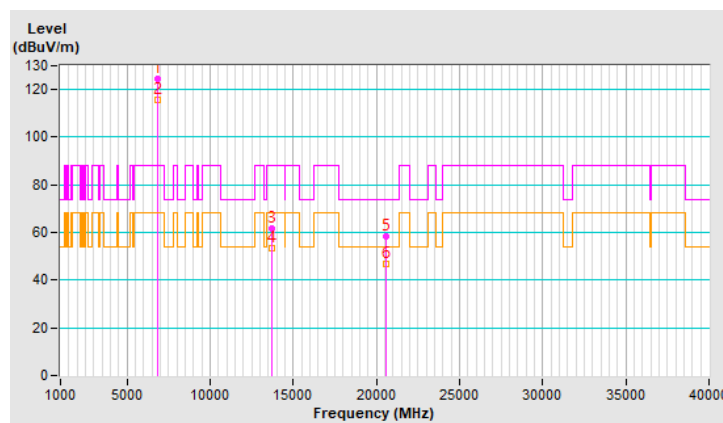


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.2 PK	88.2	-17.0	1.01 H	230	69.7	1.5
2	#5925.00	55.2 AV	68.2	-13.0	1.01 H	230	53.7	1.5
3	*5955.00	117.7 PK			1.01 H	230	116.1	1.6
4	*5955.00	105.9 AV			1.01 H	230	104.3	1.6
5	11910.00	61.5 PK	74.0	-12.5	1.08 H	254	50.4	11.1
6	11910.00	51.8 AV	54.0	-2.2	1.08 H	254	40.7	11.1
7	17865.00	53.5 PK	74.0	-20.5	1.65 H	282	31.4	22.1
8	17865.00	43.9 AV	54.0	-10.1	1.65 H	282	21.8	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

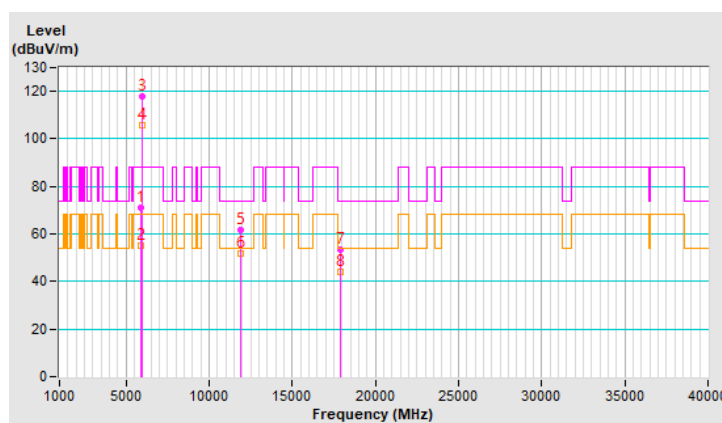


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.3 PK	88.2	-11.9	1.49 V	217	74.8	1.5
2	#5925.00	60.9 AV	68.2	-7.3	1.49 V	217	59.4	1.5
3	*5955.00	121.4 PK			1.49 V	217	119.8	1.6
4	*5955.00	112.3 AV			1.49 V	217	110.7	1.6
5	11910.00	61.8 PK	74.0	-12.2	1.24 V	217	50.7	11.1
6	11910.00	53.4 AV	54.0	-0.6	1.24 V	217	42.3	11.1
7	17865.00	58.7 PK	74.0	-15.3	2.08 V	212	36.6	22.1
8	17865.00	46.7 AV	54.0	-7.3	2.08 V	212	24.6	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

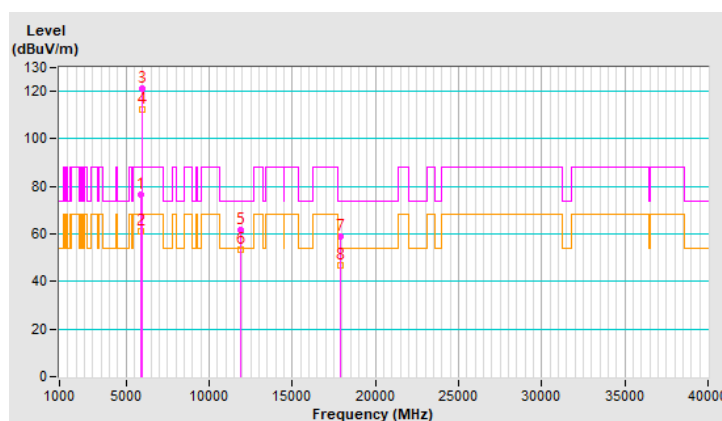


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.3 PK			1.10 H	221	114.3	3.0
2	*6415.00	105.9 AV			1.10 H	221	102.9	3.0
3	#12830.00	62.2 PK	88.2	-26.0	1.02 H	258	51.6	10.6
4	#12830.00	52.0 AV	68.2	-16.2	1.02 H	258	41.4	10.6
5	19245.00	53.8 PK	74.0	-20.2	1.70 H	284	60.2	-6.4
6	19245.00	44.2 AV	54.0	-9.8	1.70 H	284	50.6	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

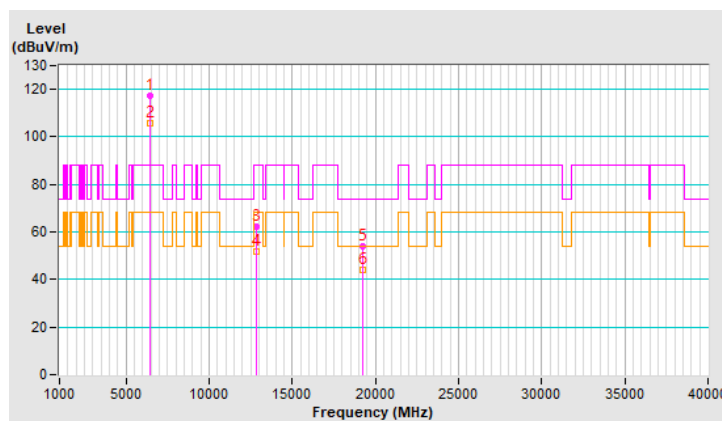


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.3 PK			1.48 V	190	118.3	3.0
2	*6415.00	112.3 AV			1.48 V	190	109.3	3.0
3	#12830.00	61.1 PK	88.2	-27.1	1.27 V	225	50.5	10.6
4	#12830.00	52.8 AV	68.2	-15.4	1.27 V	225	42.2	10.6
5	19245.00	58.5 PK	74.0	-15.5	2.14 V	196	64.9	-6.4
6	19245.00	47.1 AV	54.0	-6.9	2.14 V	196	53.5	-6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

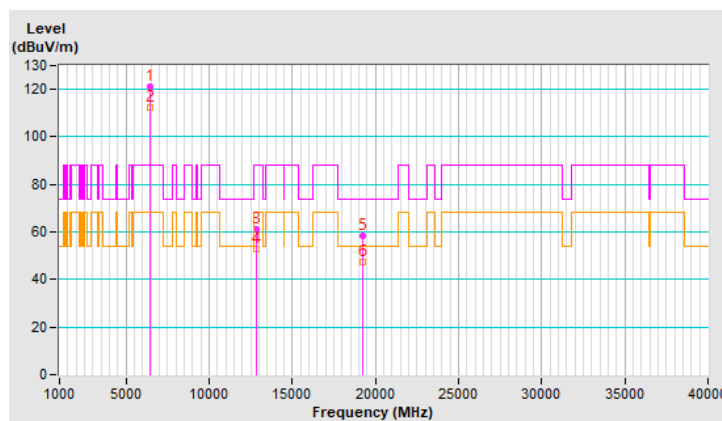


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.7 PK			1.09 H	221	114.1	3.6
2	*6535.00	105.8 AV			1.09 H	221	102.2	3.6
3	#13070.00	61.8 PK	88.2	-26.4	1.04 H	247	51.0	10.8
4	#13070.00	51.7 AV	68.2	-16.5	1.04 H	247	40.9	10.8
5	19605.00	54.1 PK	74.0	-19.9	1.71 H	262	60.1	-6.0
6	19605.00	44.0 AV	54.0	-10.0	1.71 H	262	50.0	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

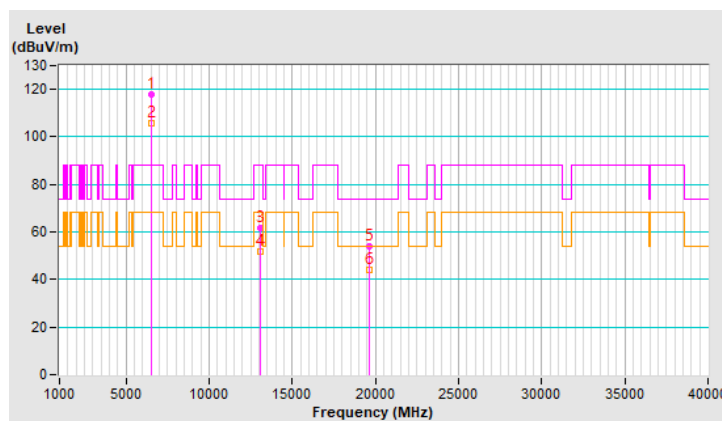


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.4 PK			1.52 V	197	117.8	3.6
2	*6535.00	112.5 AV			1.52 V	197	108.9	3.6
3	#13070.00	62.4 PK	88.2	-25.8	1.19 V	229	51.6	10.8
4	#13070.00	53.7 AV	68.2	-14.5	1.19 V	229	42.9	10.8
5	19605.00	58.7 PK	74.0	-15.3	2.13 V	212	64.7	-6.0
6	19605.00	47.2 AV	54.0	-6.8	2.13 V	212	53.2	-6.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

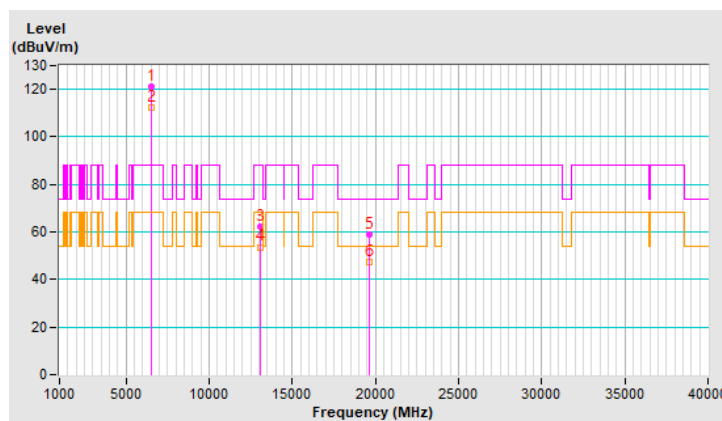


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.6 PK			1.06 H	219	111.5	4.1
2	*6855.00	105.7 AV			1.06 H	219	101.6	4.1
3	#13710.00	62.8 PK	88.2	-25.4	1.05 H	236	49.9	12.9
4	#13710.00	52.6 AV	68.2	-15.6	1.05 H	236	39.7	12.9
5	20565.00	53.7 PK	74.0	-20.3	1.73 H	262	58.5	-4.8
6	20565.00	44.2 AV	54.0	-9.8	1.73 H	262	49.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

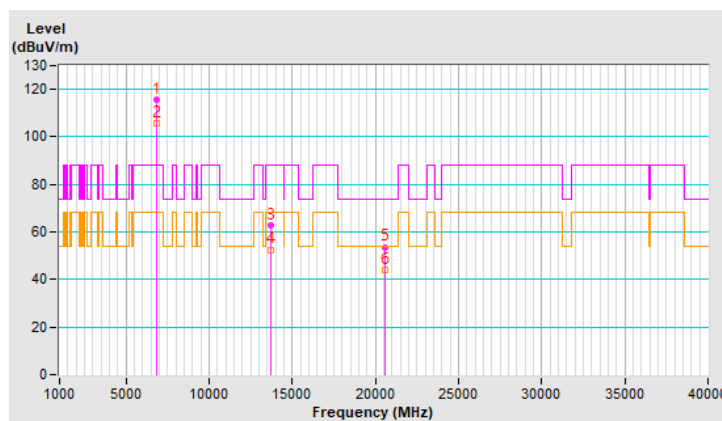


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.3 PK			1.45 V	194	113.2	4.1
2	*6855.00	110.7 AV			1.45 V	194	106.6	4.1
3	#13710.00	61.9 PK	88.2	-26.3	1.28 V	213	49.0	12.9
4	#13710.00	53.7 AV	68.2	-14.5	1.28 V	213	40.8	12.9
5	20565.00	58.3 PK	74.0	-15.7	2.12 V	188	63.1	-4.8
6	20565.00	46.3 AV	54.0	-7.7	2.12 V	188	51.1	-4.8

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

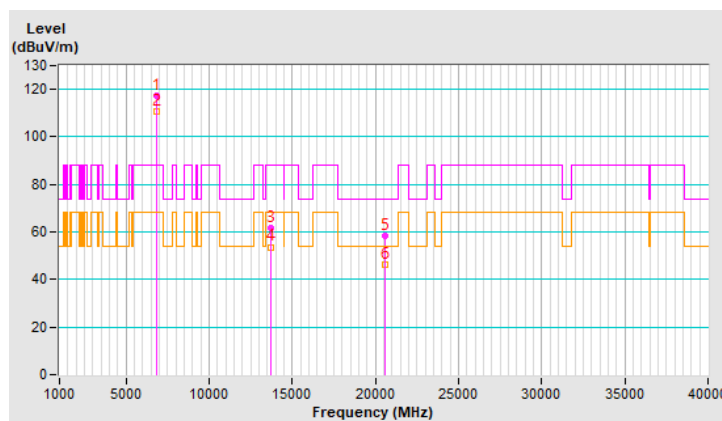


Plot of Band Edge

1TX


802.11a Channel 1

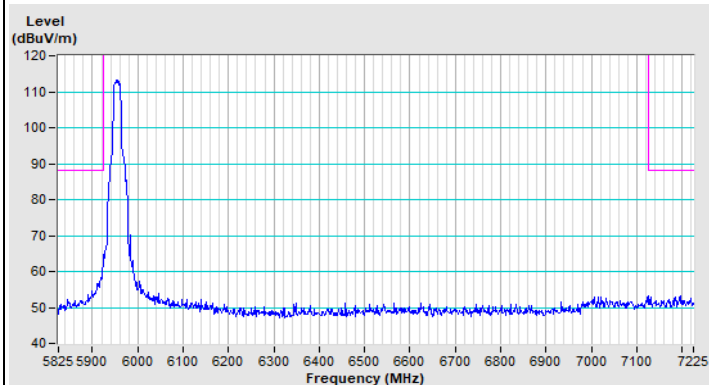


Horizontal (Peak)

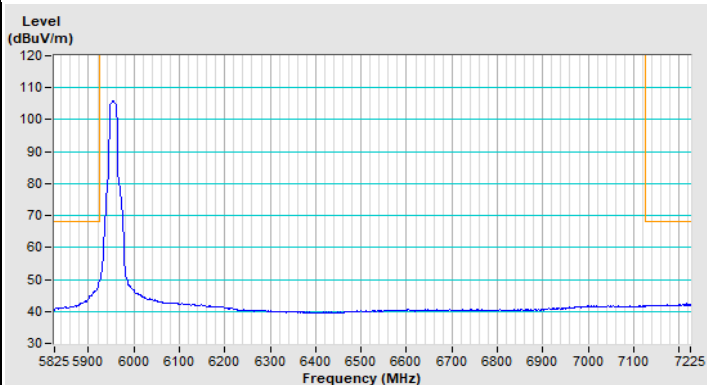

Horizontal (Average)

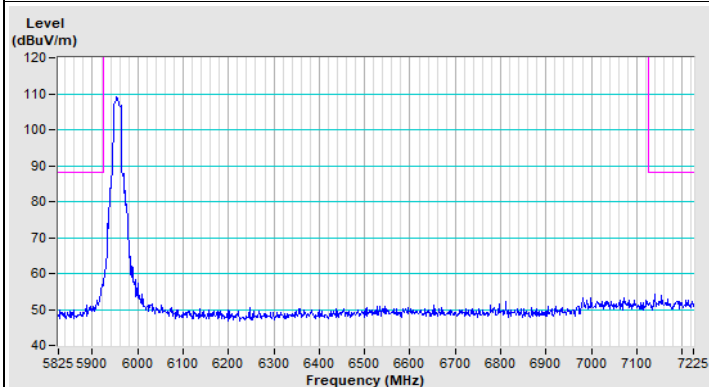


Vertical (Peak)

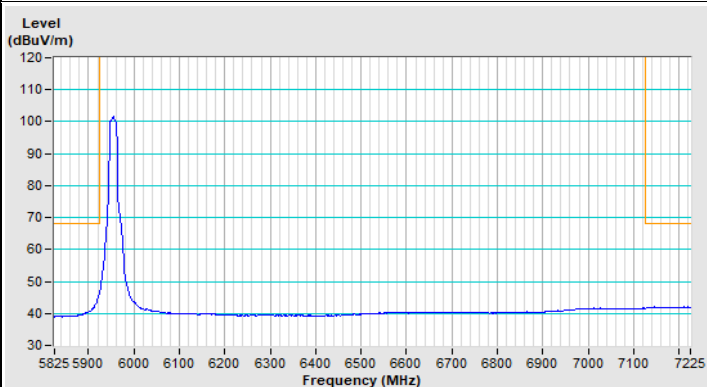


Vertical (Average)


802.11a Channel 181

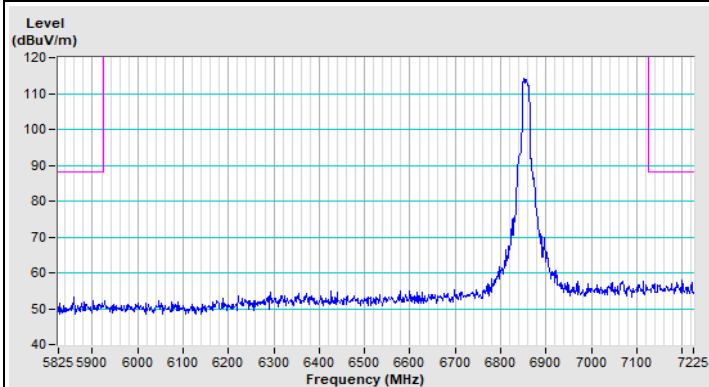


Horizontal (Peak)

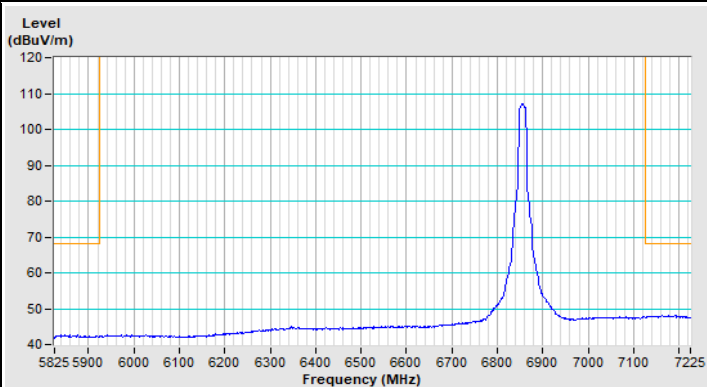

Horizontal (Average)

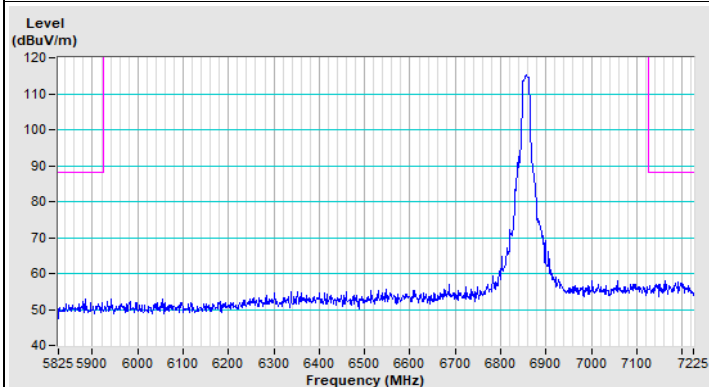


Vertical (Peak)

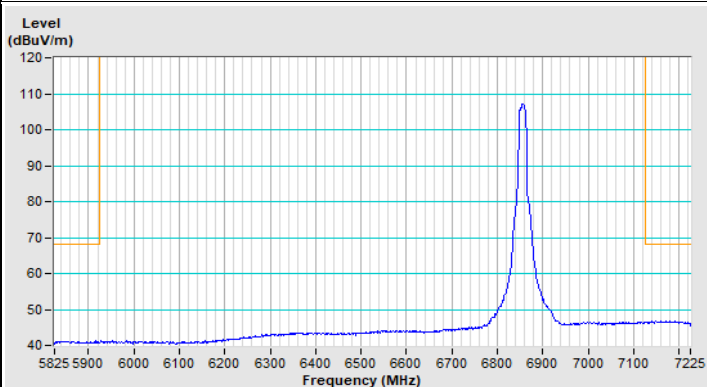


Vertical (Average)

2TX


802.11a Channel 1

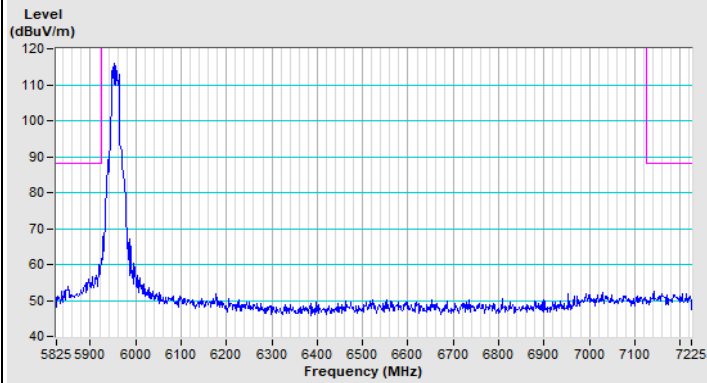


Horizontal (Peak)

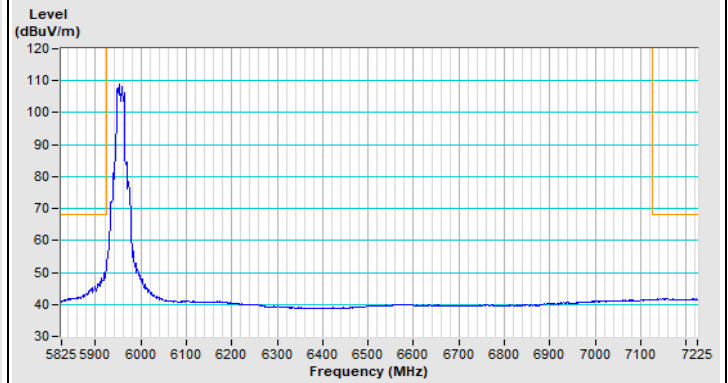

Horizontal (Average)

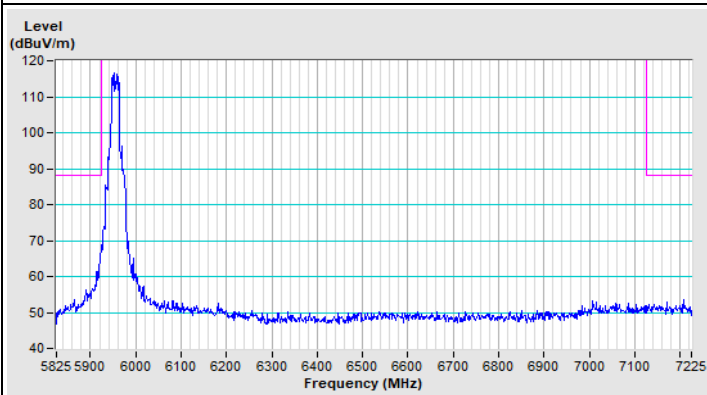


Vertical (Peak)

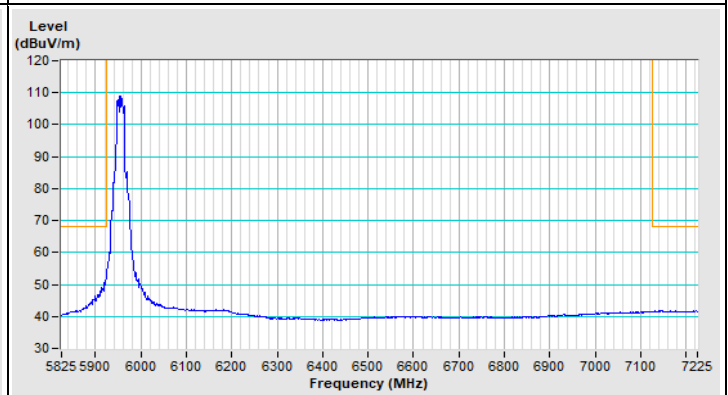


Vertical (Average)


802.11a Channel 181

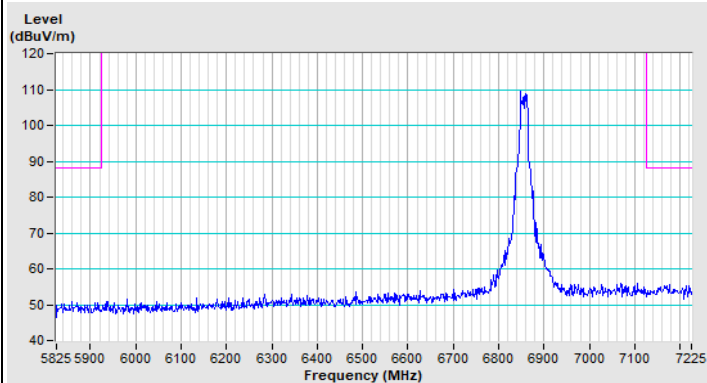


Horizontal (Peak)

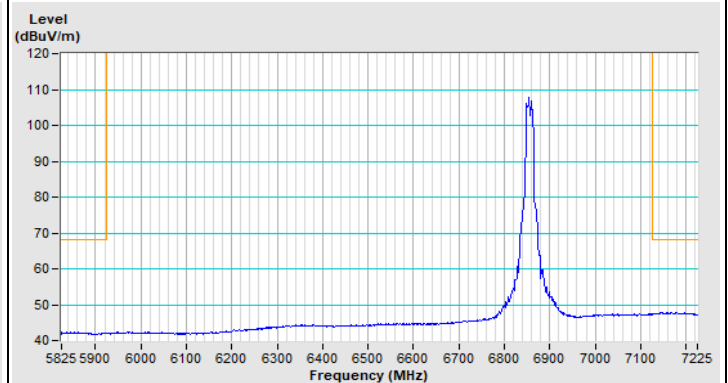

Horizontal (Average)

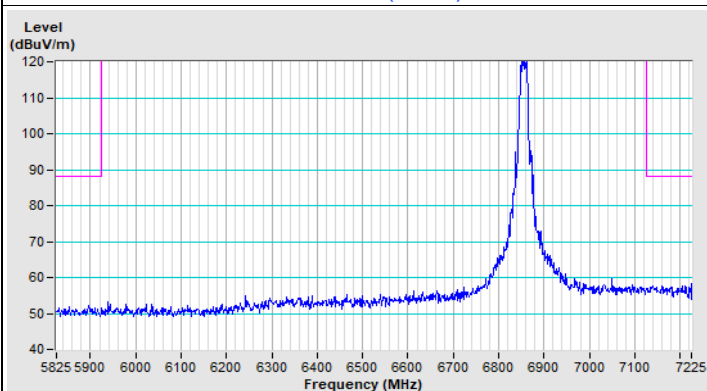


Vertical (Peak)

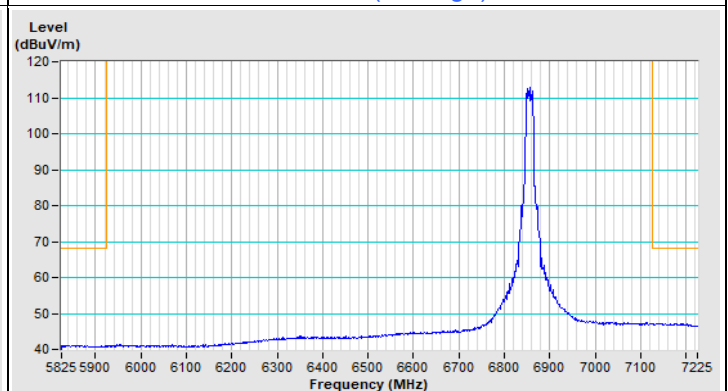


Vertical (Average)

2T1S


802.11ax (HE20) Channel 1

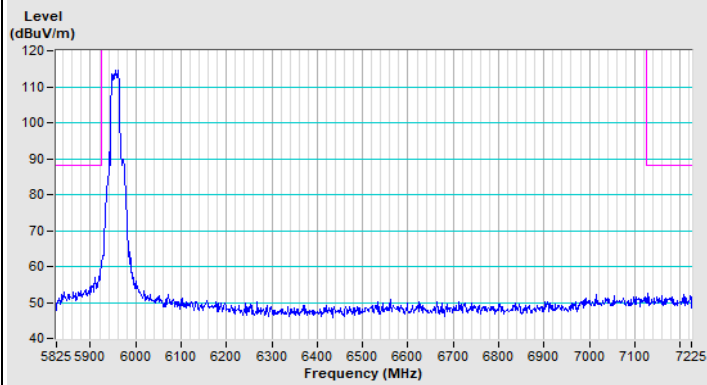


Horizontal (Peak)

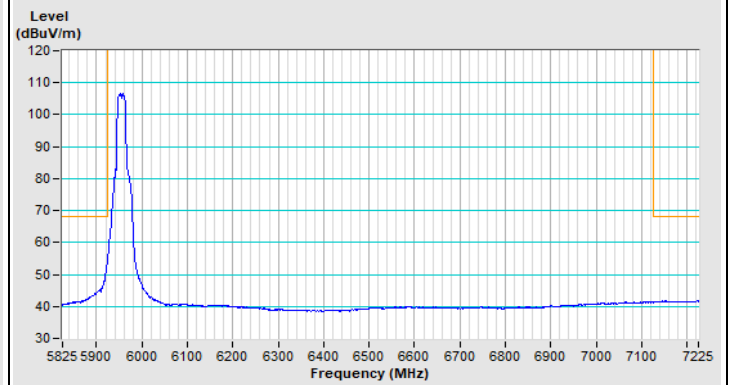

Horizontal (Average)

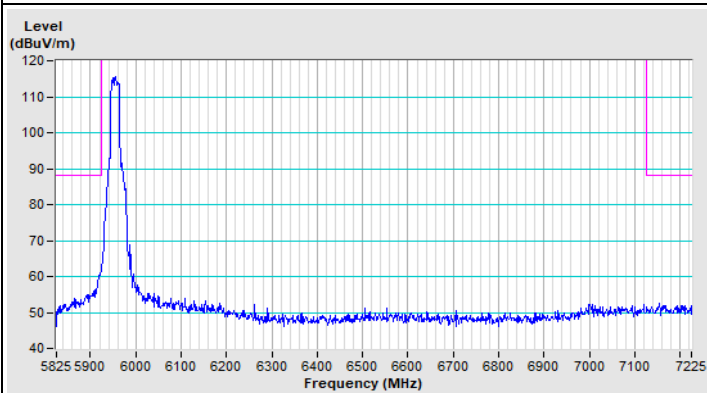


Vertical (Peak)

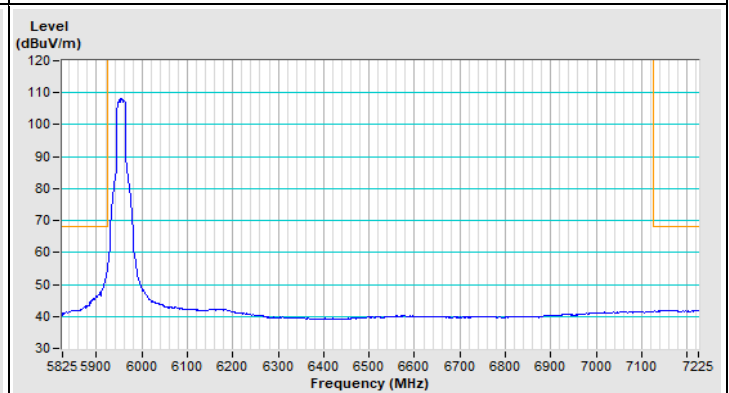


Vertical (Average)


802.11ax (HE20) Channel 181

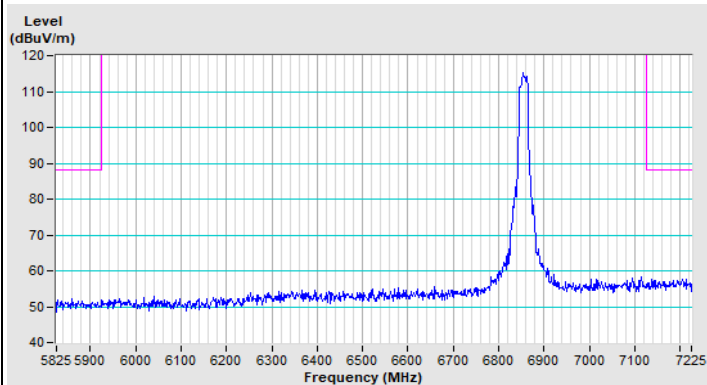


Horizontal (Peak)

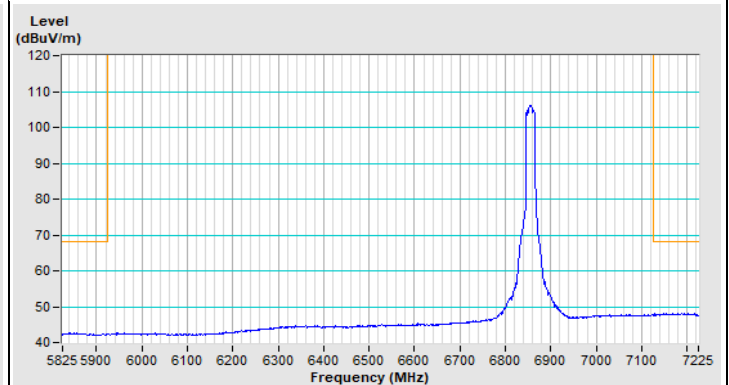

Horizontal (Average)

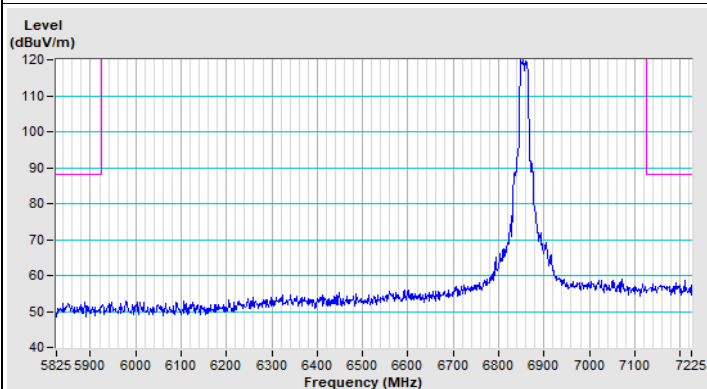


Vertical (Peak)

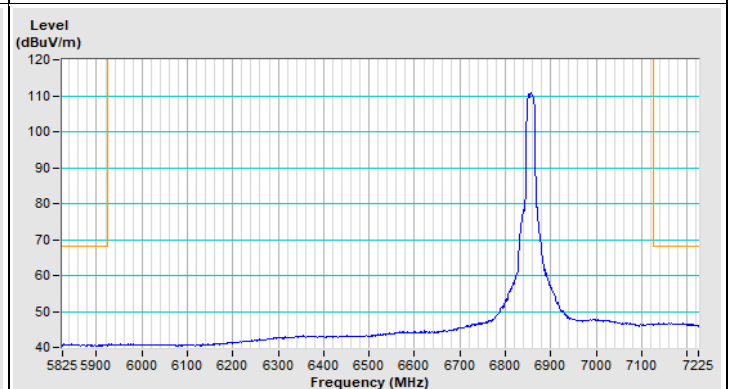


Vertical (Average)


802.11ax (HE40) Channel 3

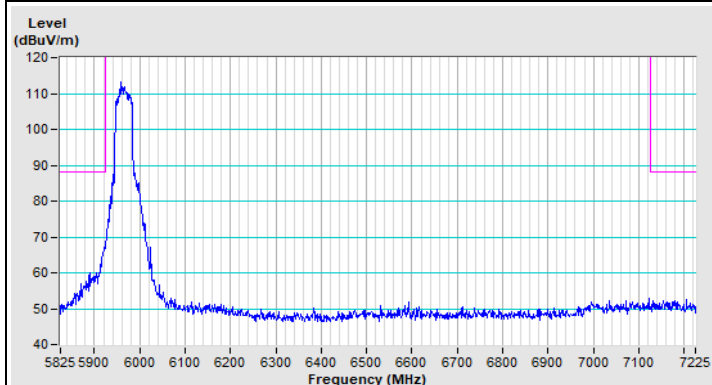


Horizontal (Peak)

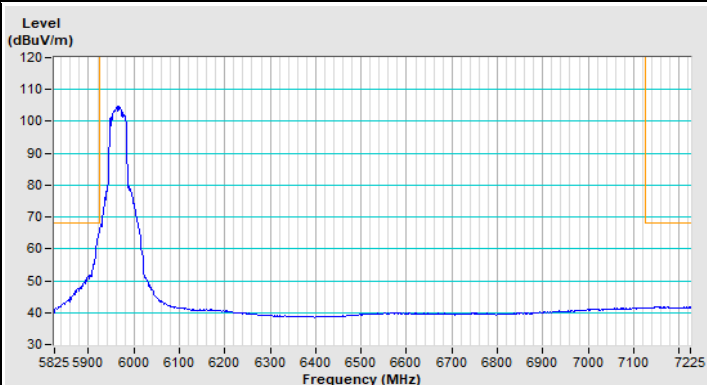

Horizontal (Average)

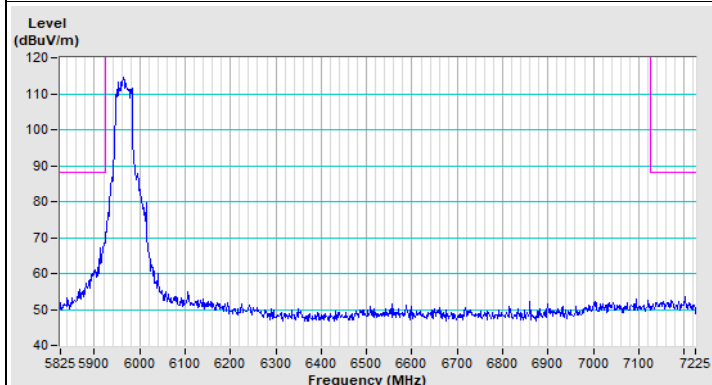


Vertical (Peak)

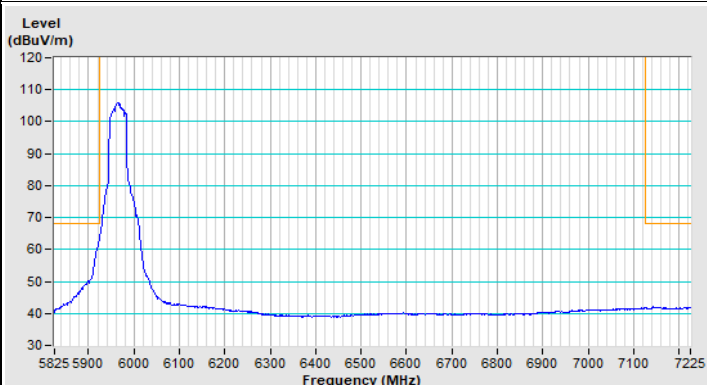


Vertical (Average)


802.11ax (HE40) Channel 179

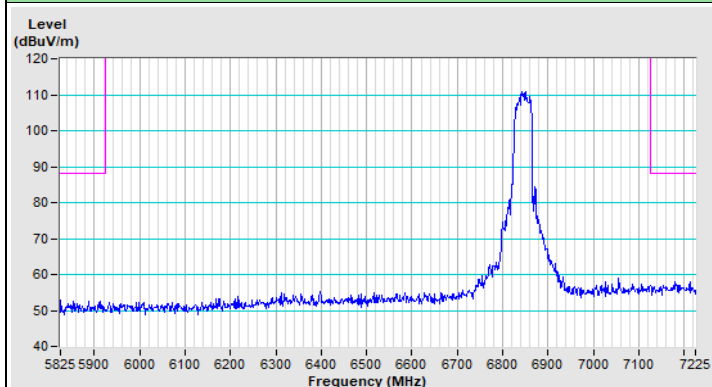


Horizontal (Peak)

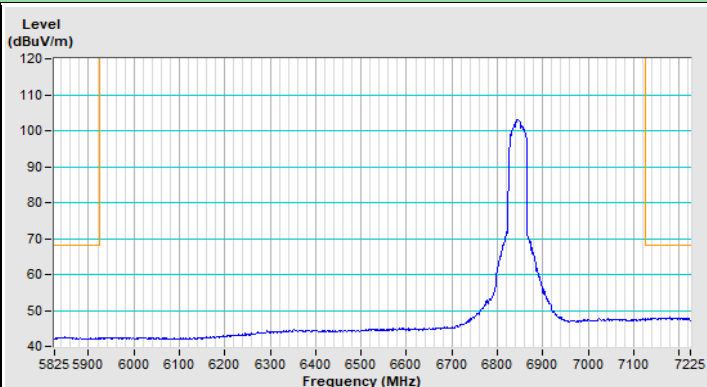

Horizontal (Average)

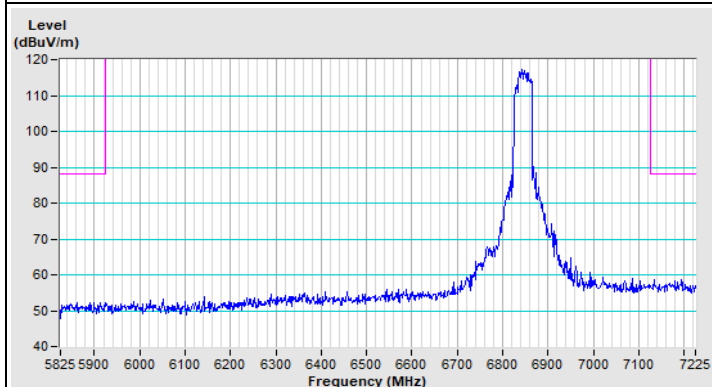


Vertical (Peak)

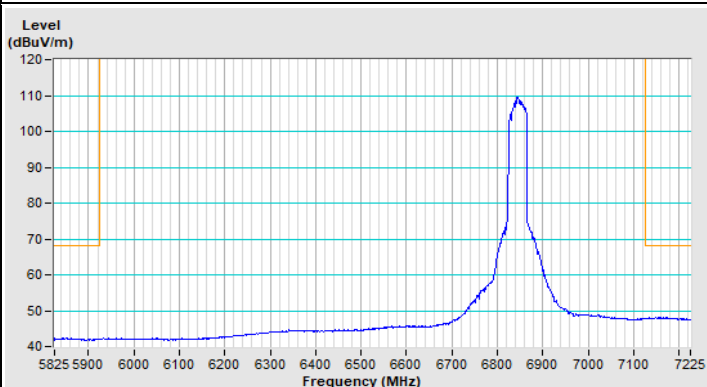


Vertical (Average)


802.11ax (HE80) Channel 7

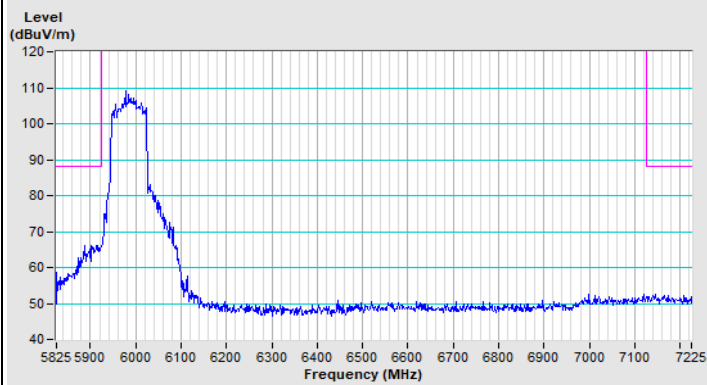


Horizontal (Peak)

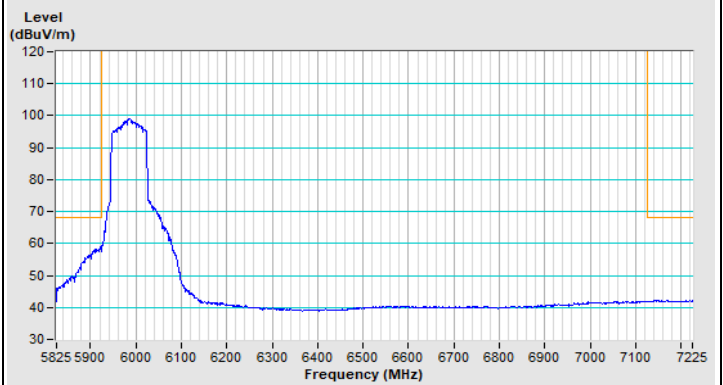

Horizontal (Average)

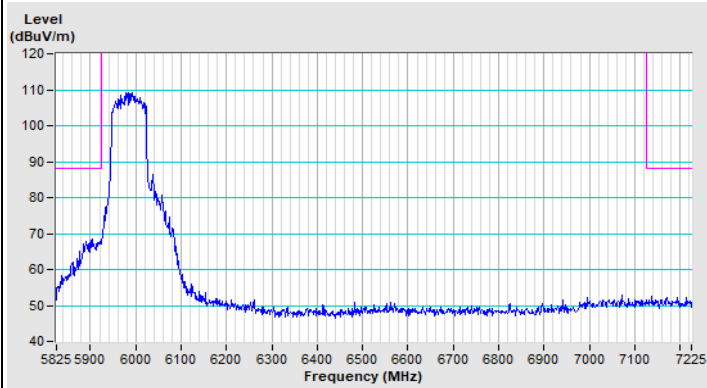


Vertical (Peak)

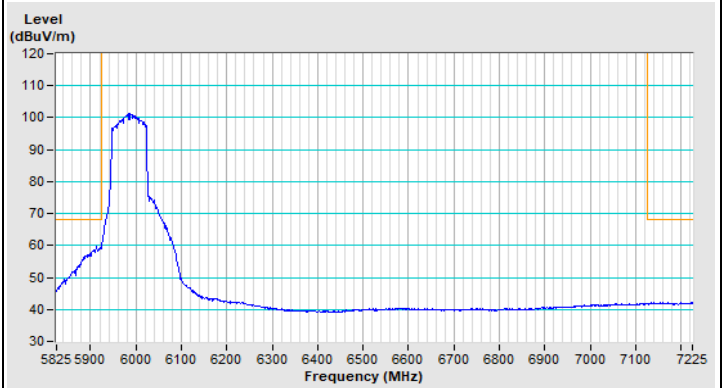


Vertical (Average)


802.11ax (HE80) Channel 167

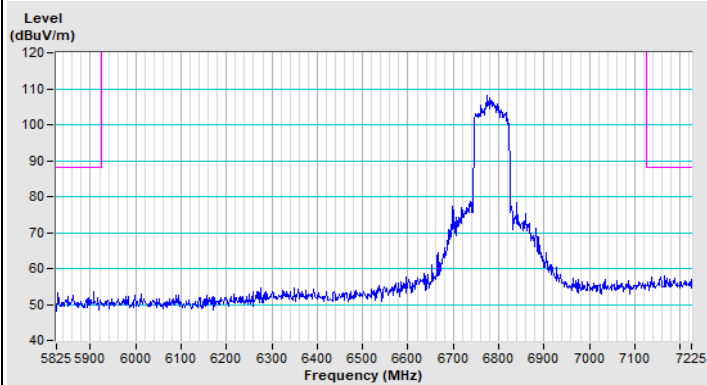


Horizontal (Peak)

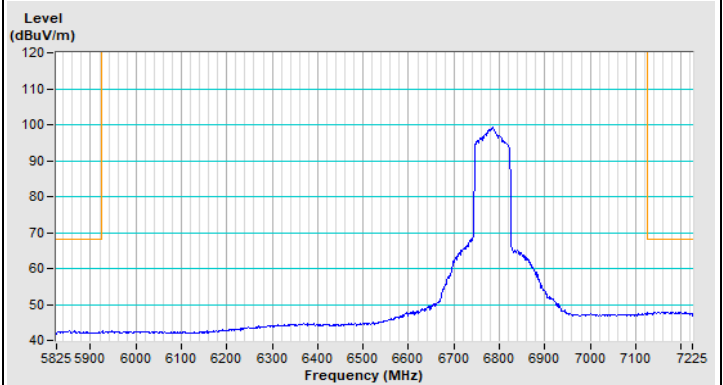

Horizontal (Average)

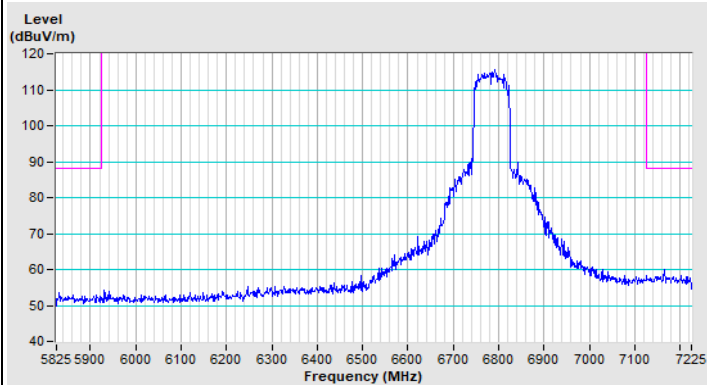





Vertical (Peak)

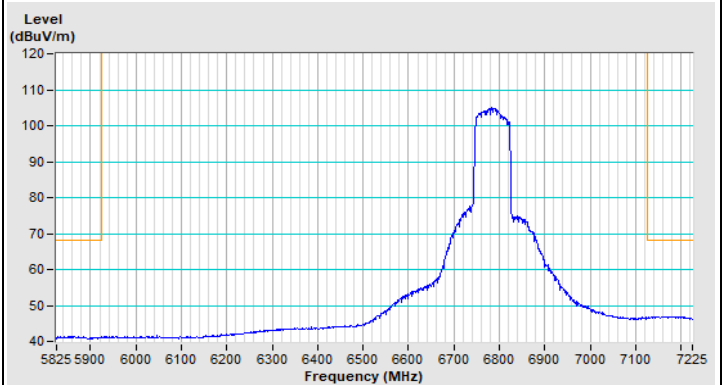





Vertical (Average)

1T1S

802.11ax (HE160) Channel 15

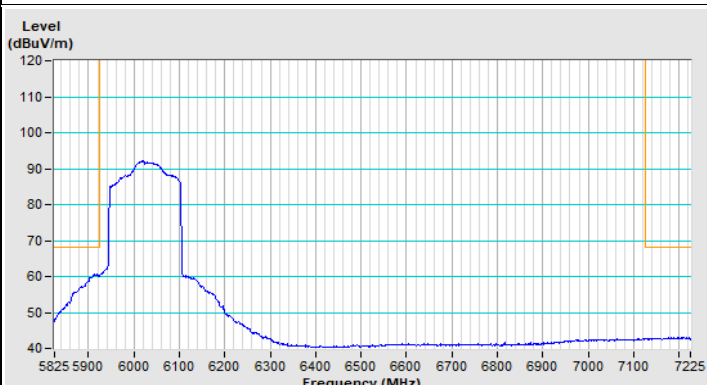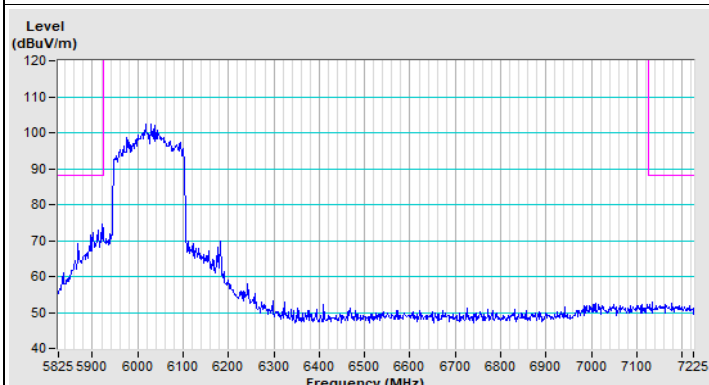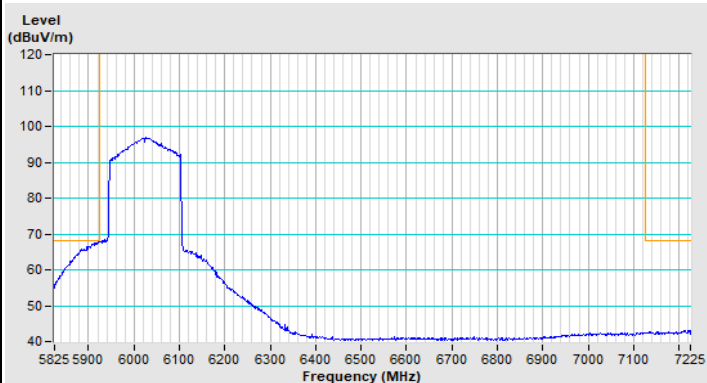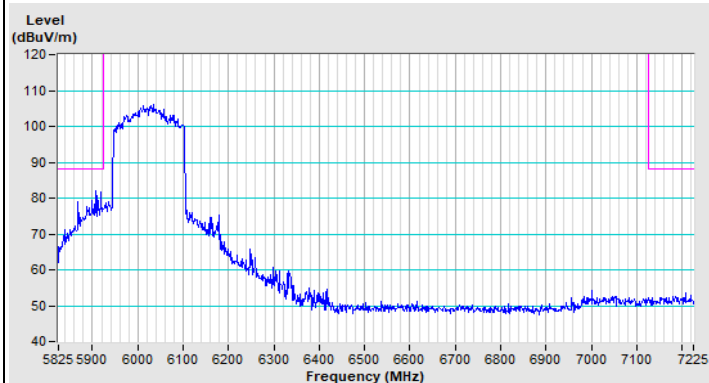


802.11ax (HE160) Channel 143

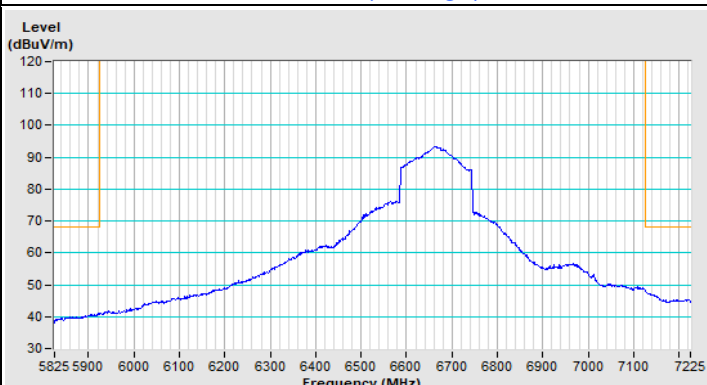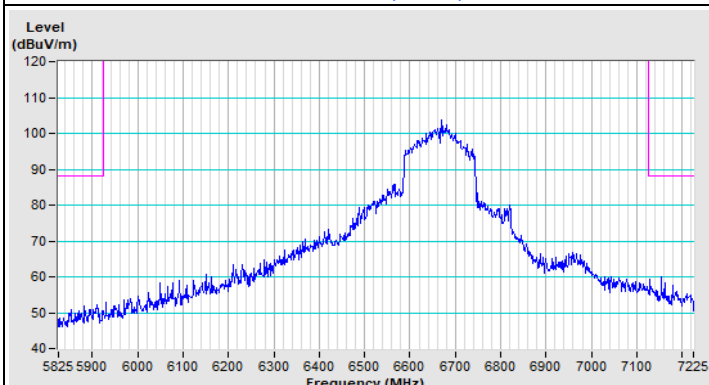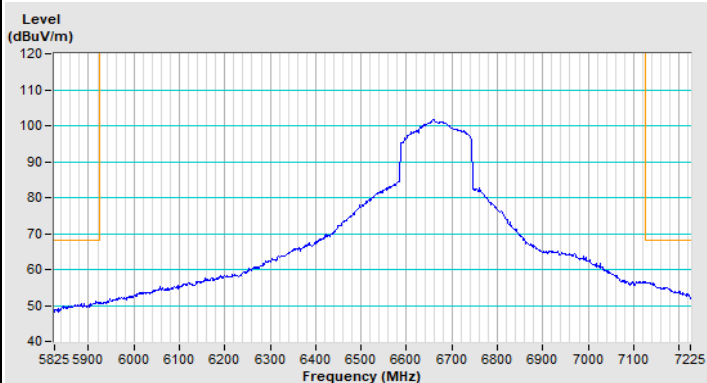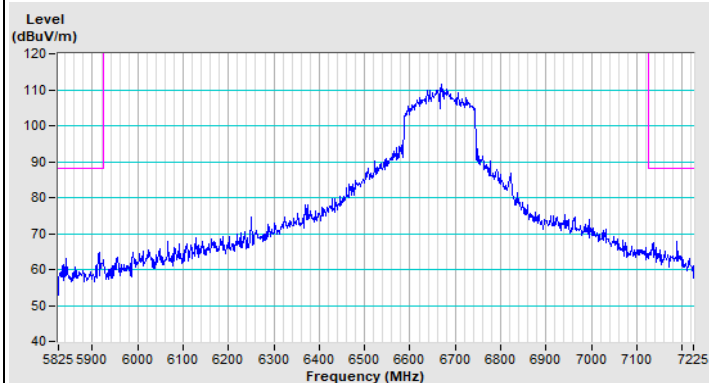


2T1S


802.11ax (HE160) Channel 15

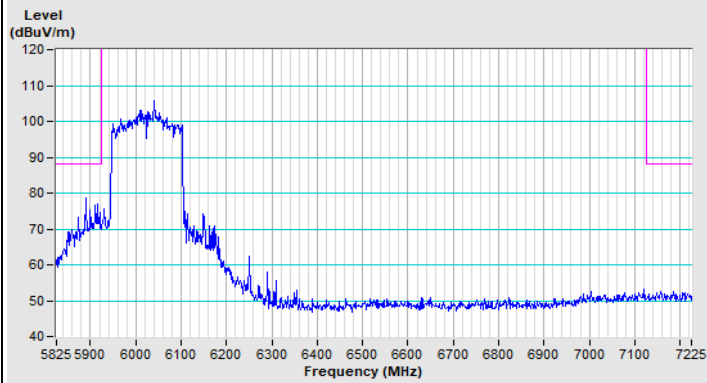


Horizontal (Peak)

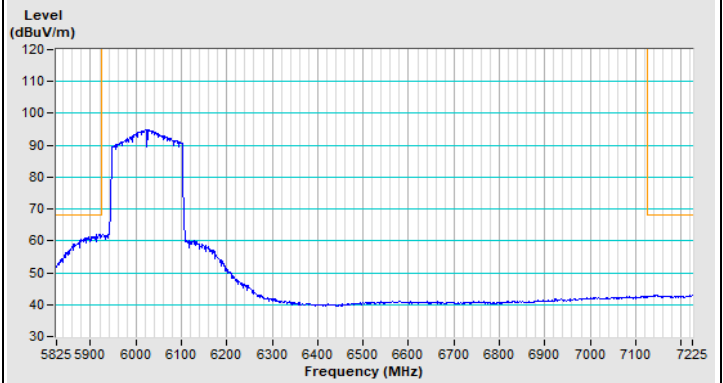

Horizontal (Average)

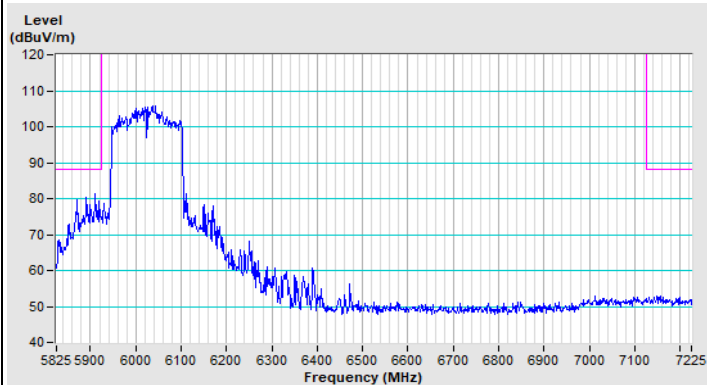


Vertical (Peak)

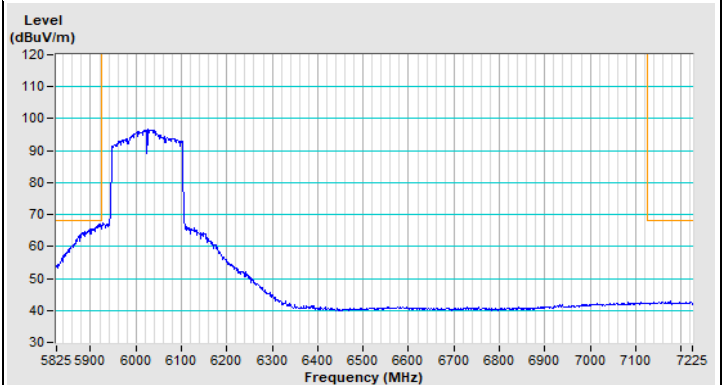


Vertical (Average)


802.11ax (HE160) Channel 143

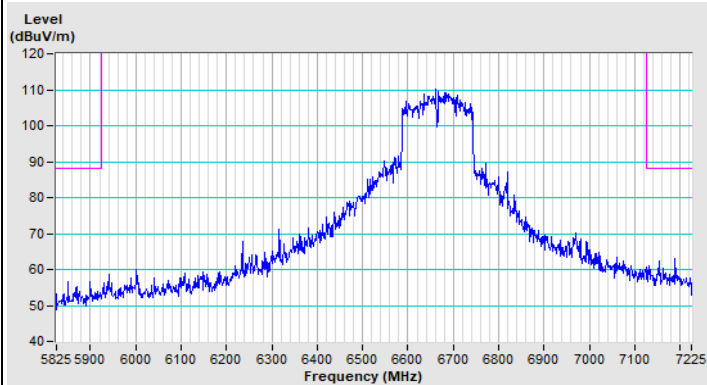


Horizontal (Peak)

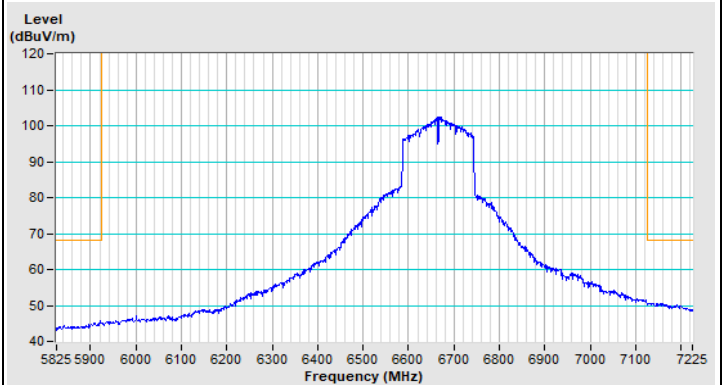

Horizontal (Average)

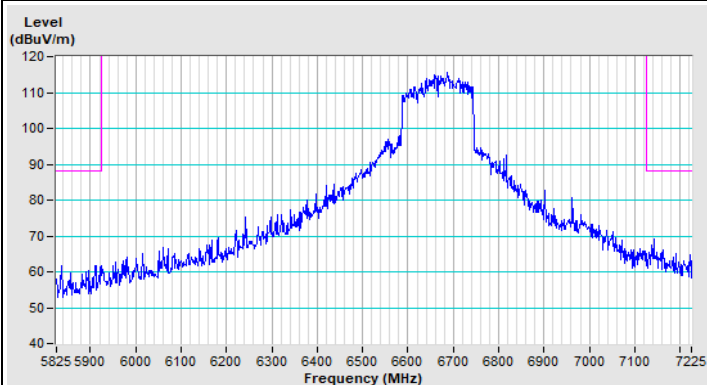


Vertical (Peak)

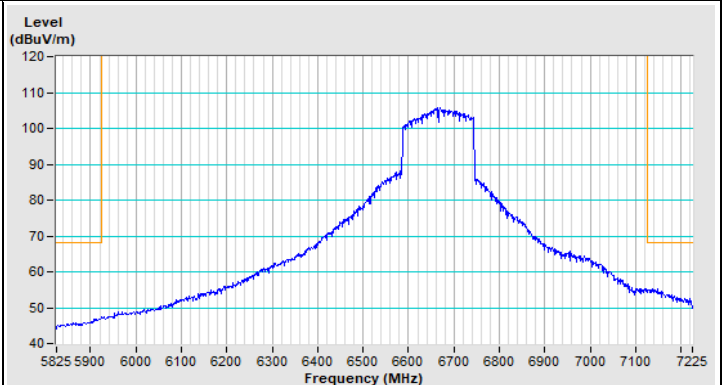


Vertical (Average)

2T1S


20 MHz Preamble 802.11ax (RU26) Channel 1

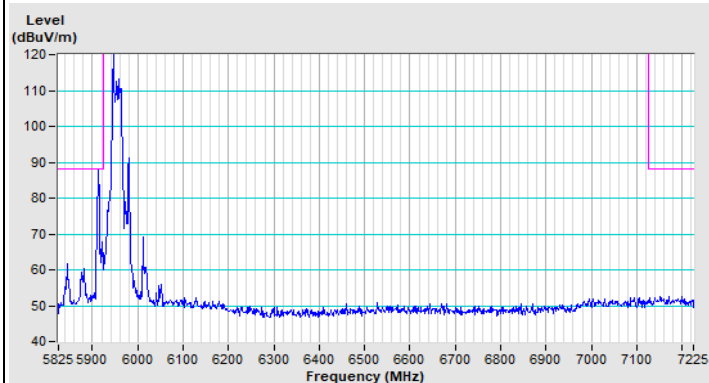


Horizontal (Peak)

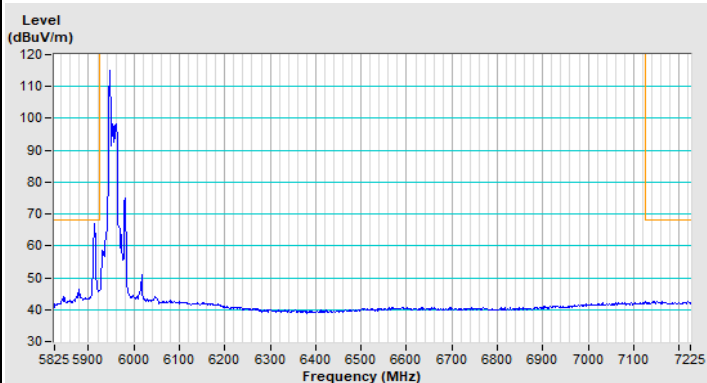

Horizontal (Average)

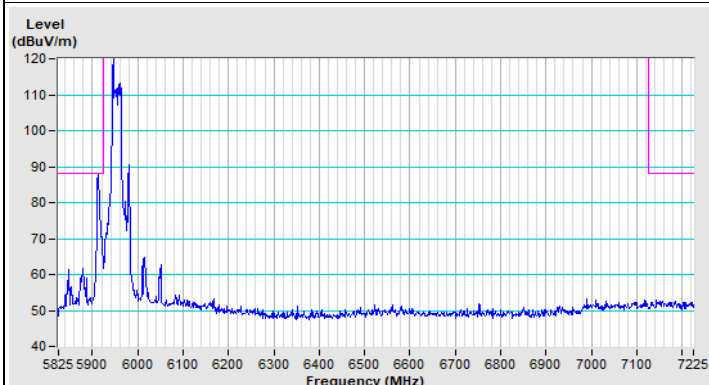


Vertical (Peak)

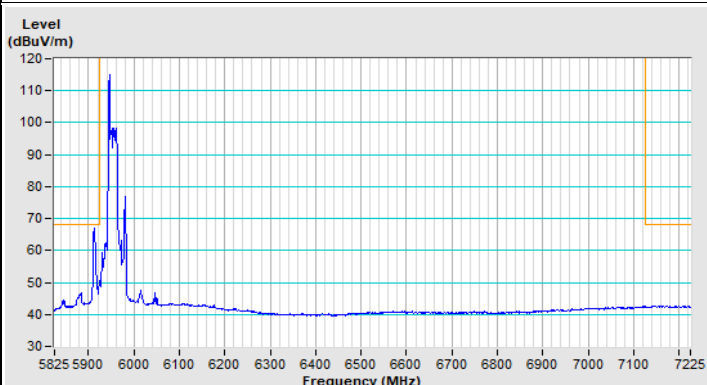


Vertical (Average)


20 MHz Preamble 802.11ax (RU26) Channel 181

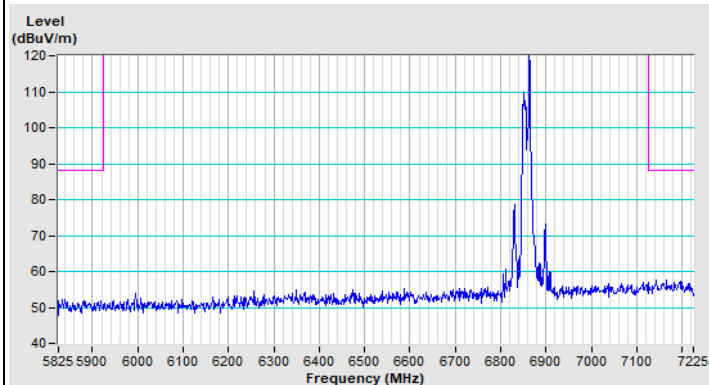


Horizontal (Peak)

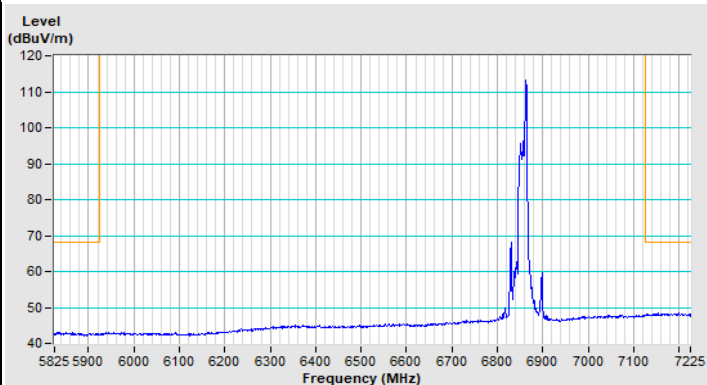

Horizontal (Average)

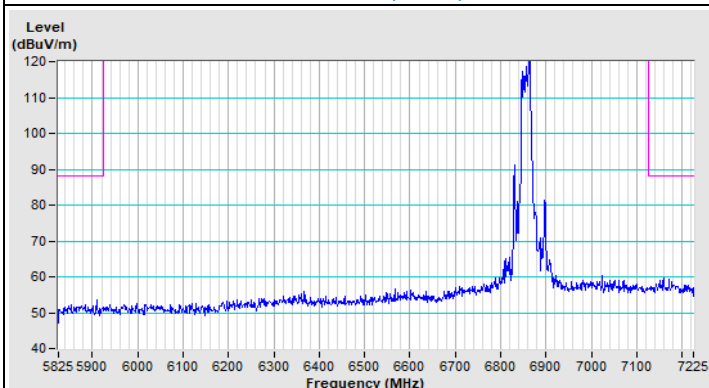


Vertical (Peak)

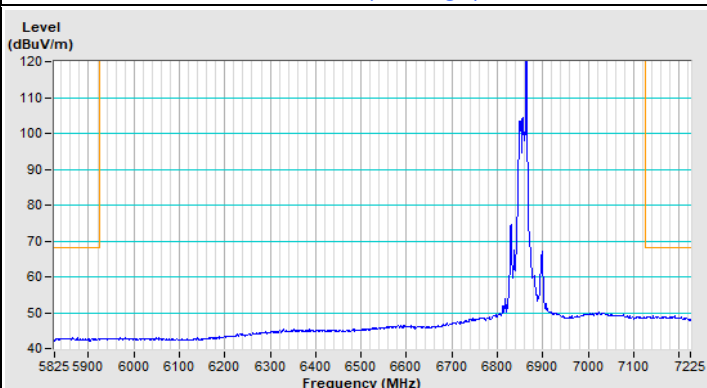


Vertical (Average)


20 MHz Preamble 802.11ax (RU52) Channel 1

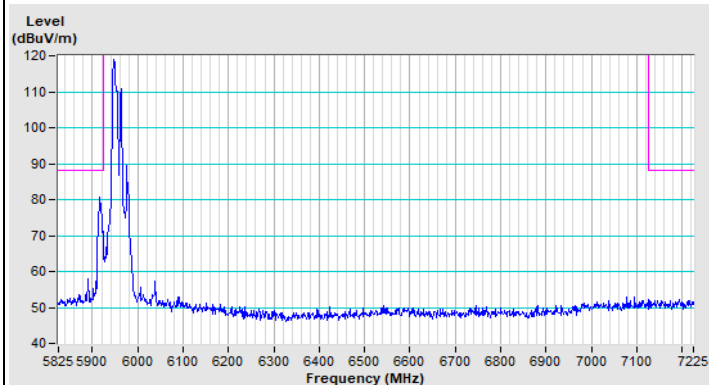


Horizontal (Peak)

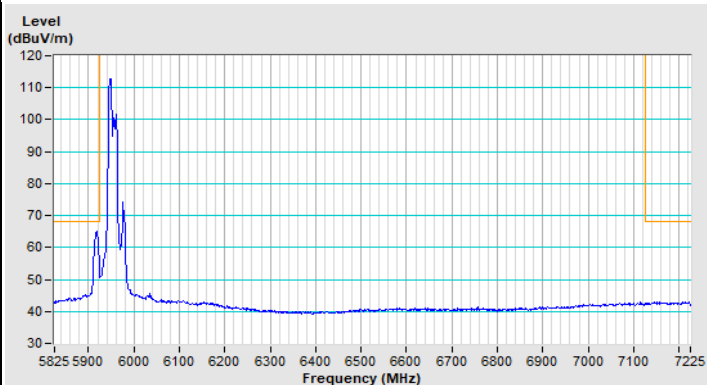

Horizontal (Average)

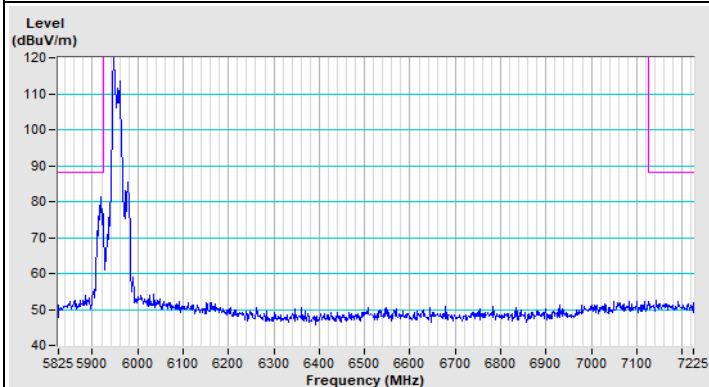


Vertical (Peak)

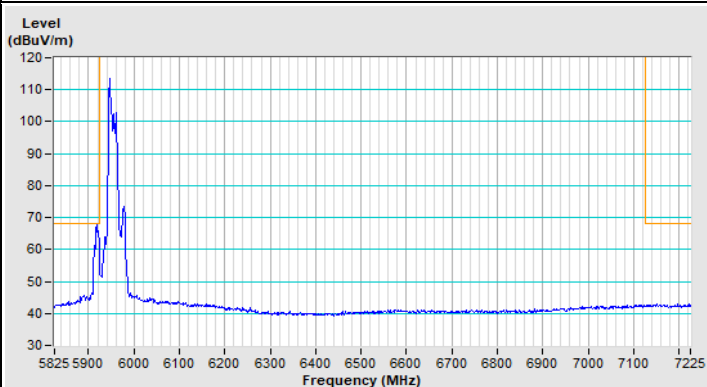


Vertical (Average)


20 MHz Preamble 802.11ax (RU52) Channel 181

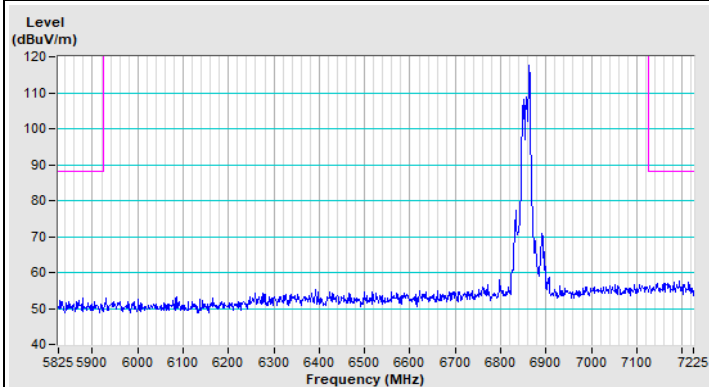


Horizontal (Peak)

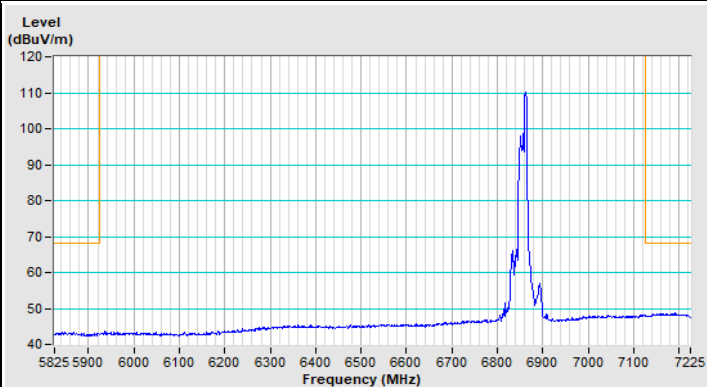

Horizontal (Average)

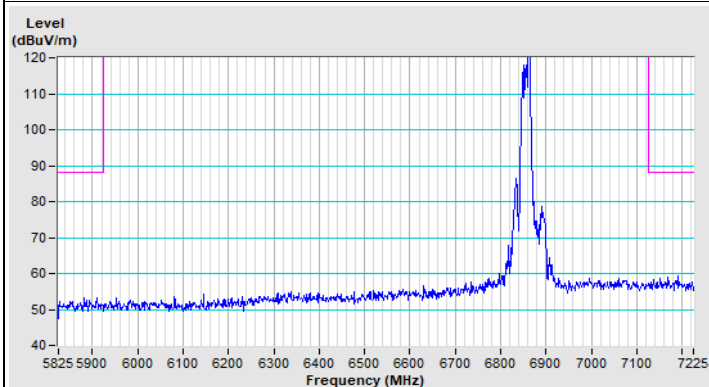


Vertical (Peak)

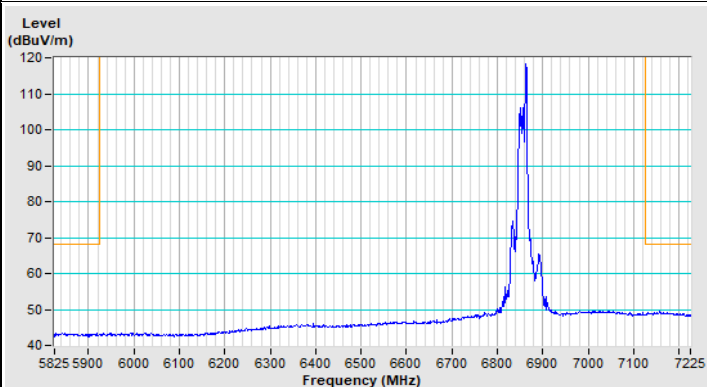


Vertical (Average)


20 MHz Preamble 802.11ax (RU106) Channel 1

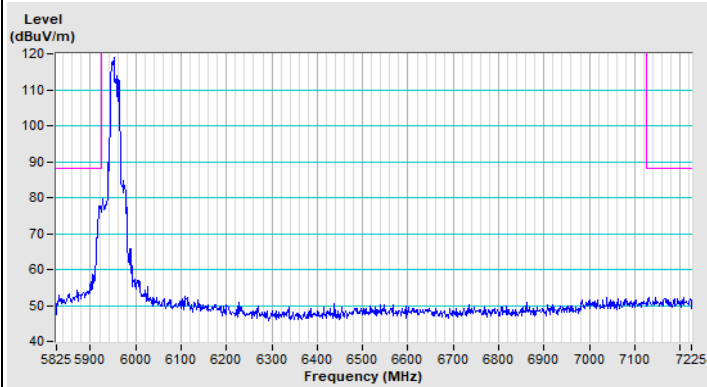


Horizontal (Peak)

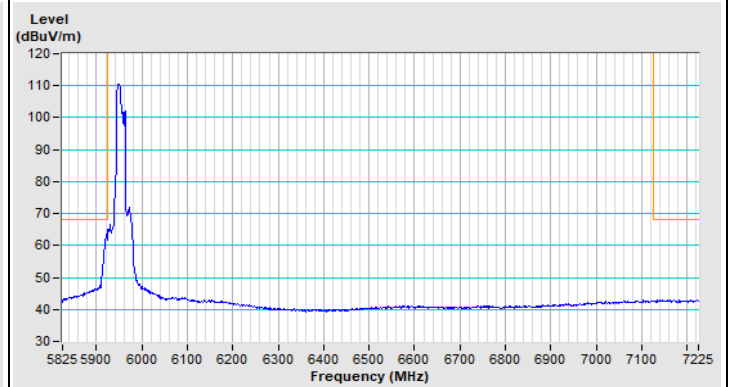

Horizontal (Average)

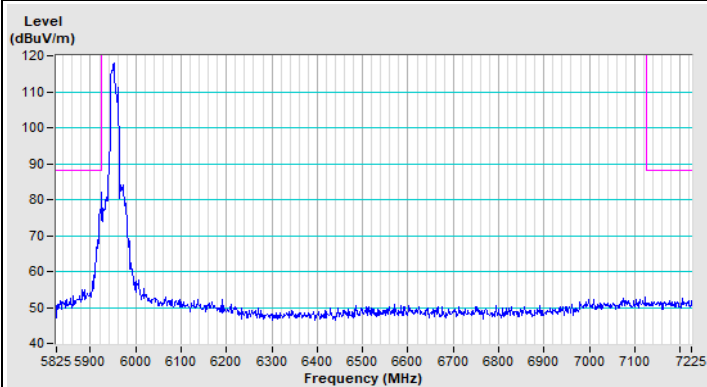


Vertical (Peak)

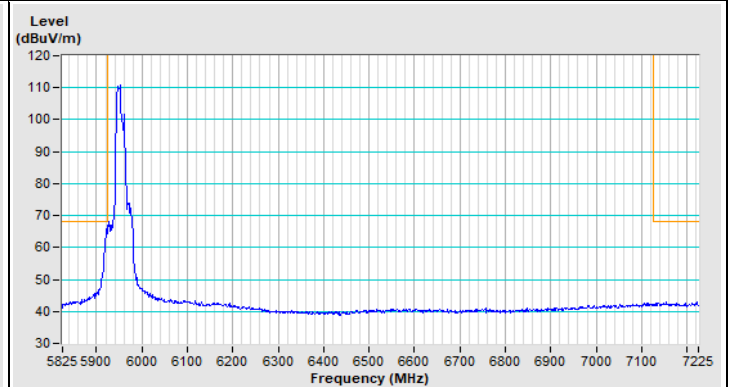


Vertical (Average)


20 MHz Preamble 802.11ax (RU106) Channel 181

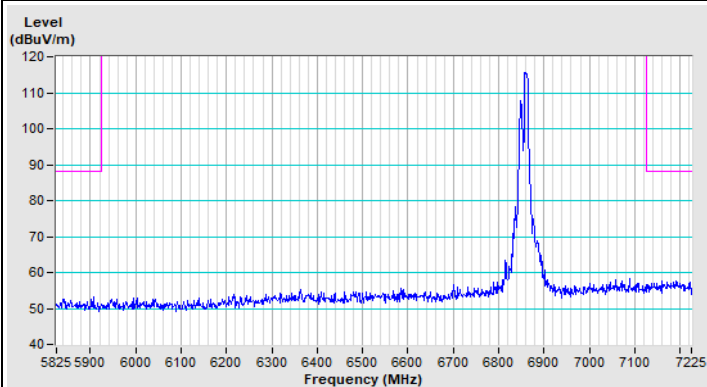


Horizontal (Peak)

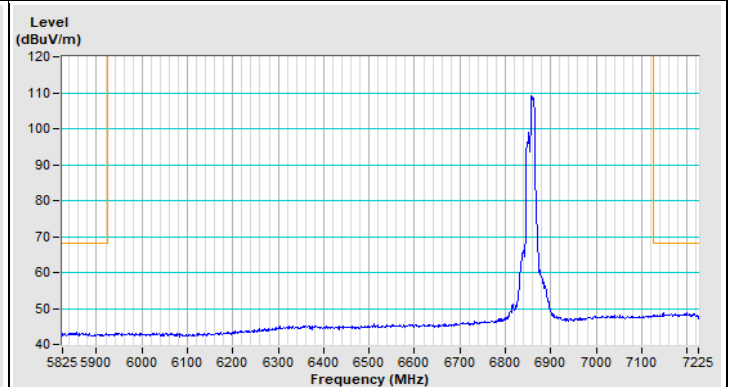

Horizontal (Average)

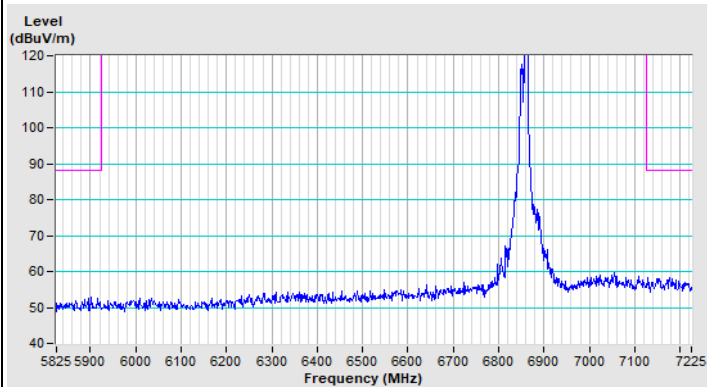


Vertical (Peak)

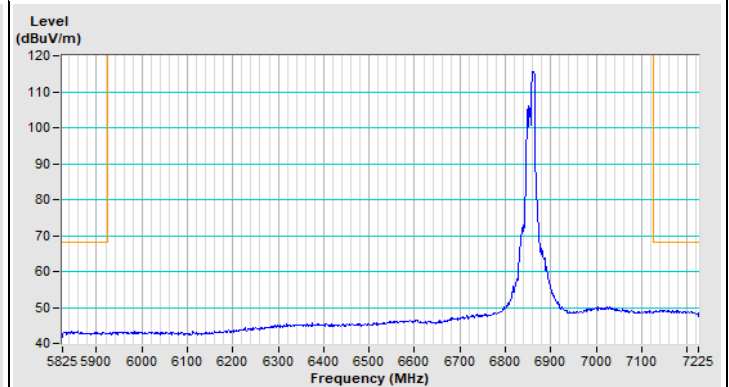


Vertical (Average)

1TX


802.11a Channel 1

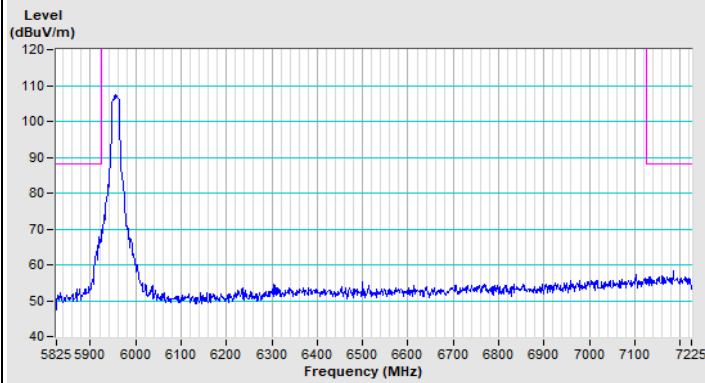


Horizontal (Peak)

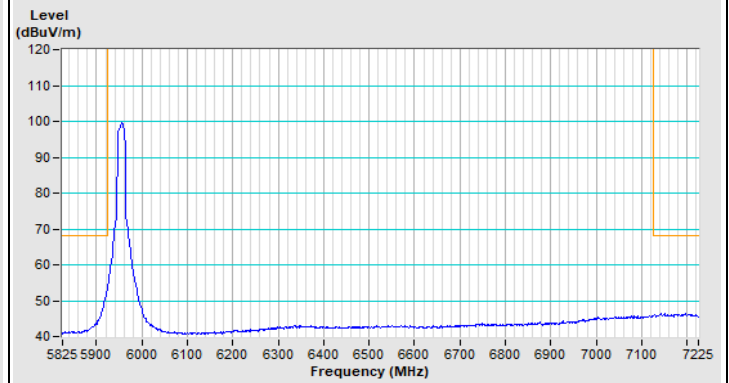

Horizontal (Average)

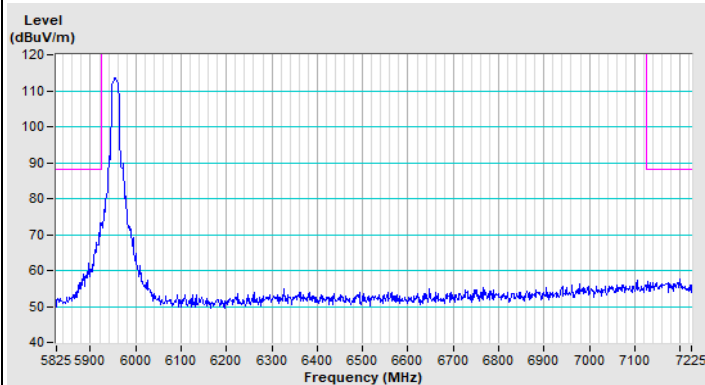


Vertical (Peak)

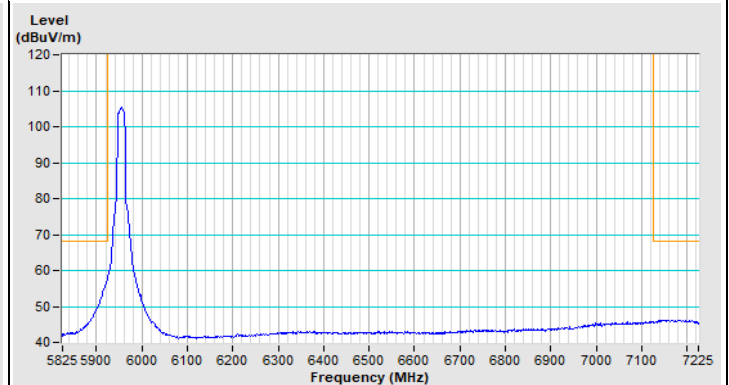


Vertical (Average)


802.11a Channel 181

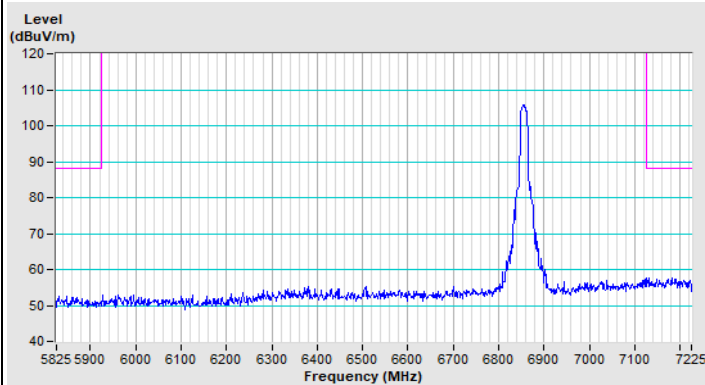


Horizontal (Peak)

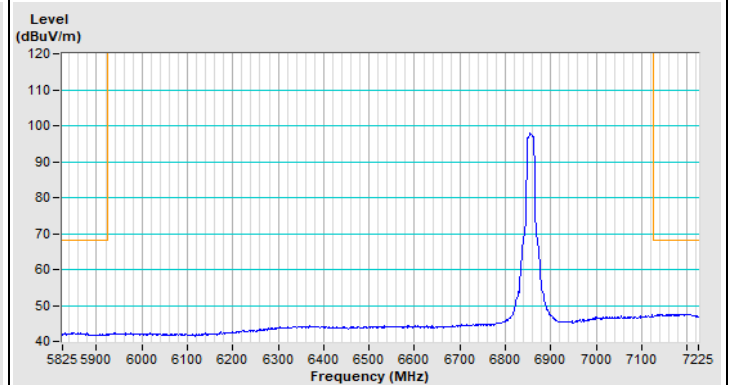

Horizontal (Average)

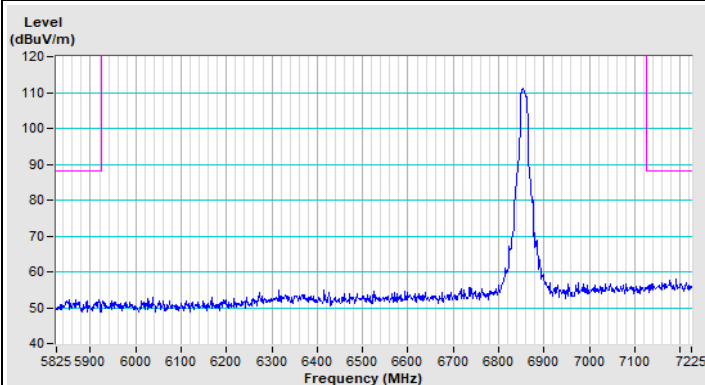


Vertical (Peak)

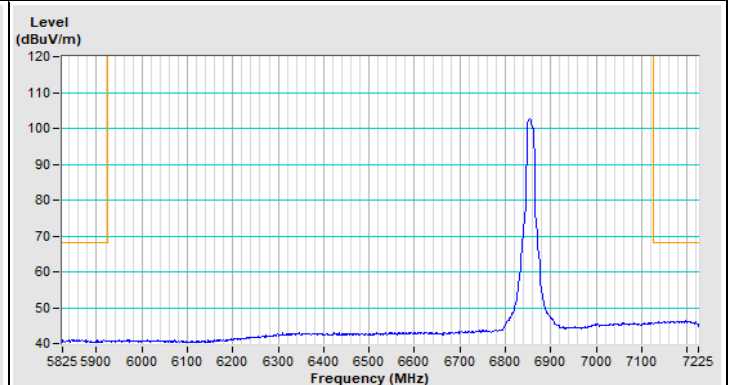


Vertical (Average)

2TX


802.11a Channel 1

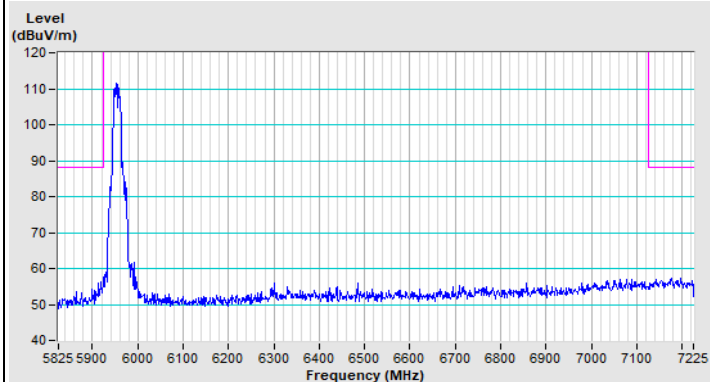


Horizontal (Peak)

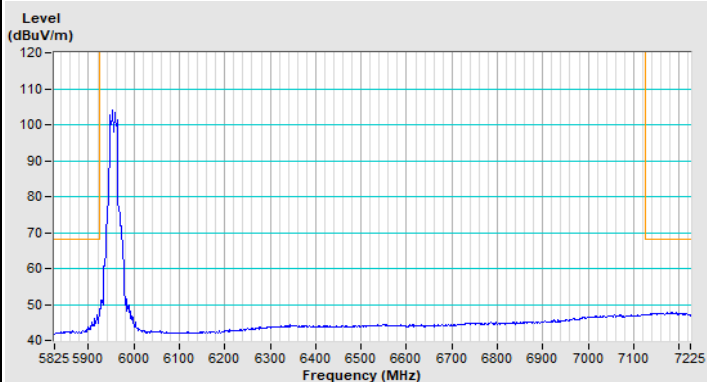

Horizontal (Average)

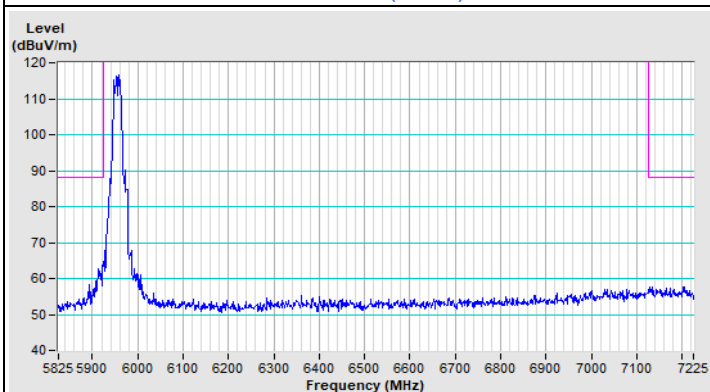


Vertical (Peak)

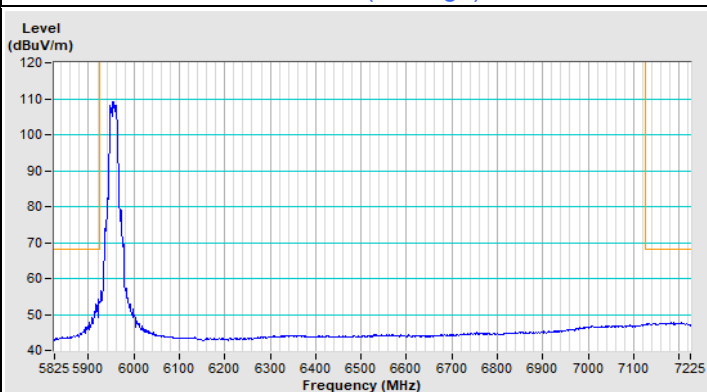


Vertical (Average)


802.11a Channel 181

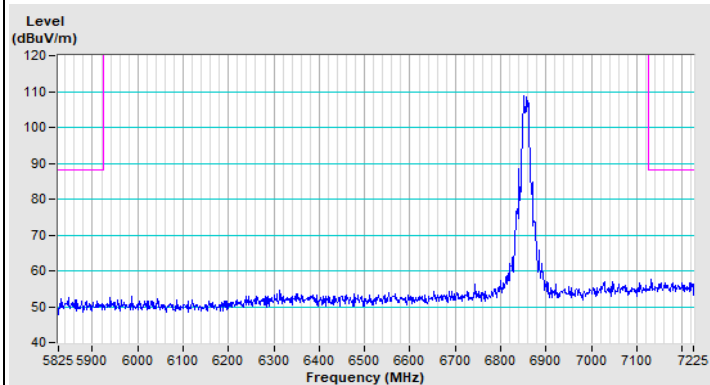


Horizontal (Peak)

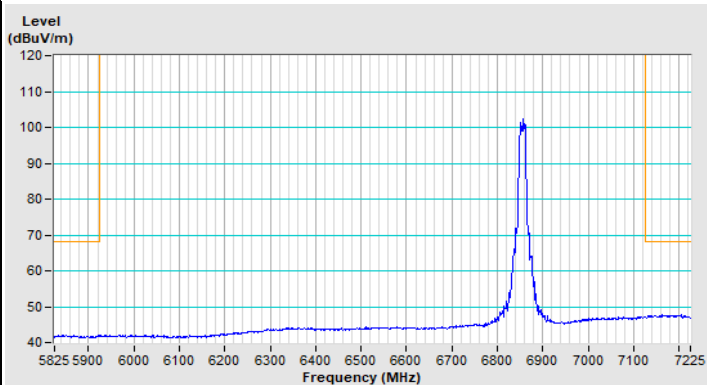

Horizontal (Average)

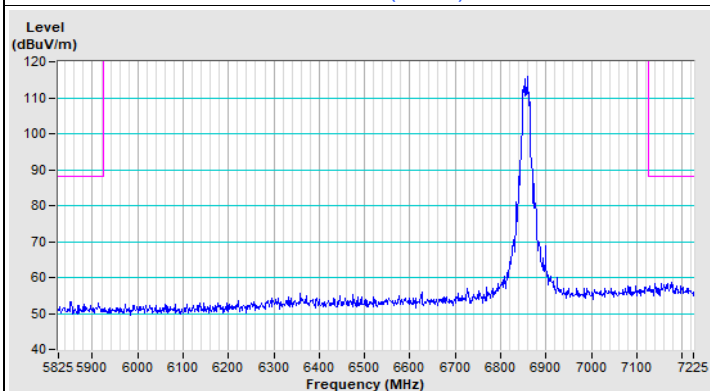


Vertical (Peak)

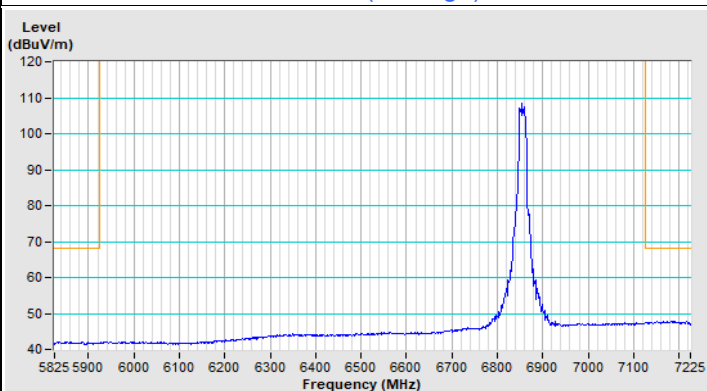


Vertical (Average)

2T1S


802.11ax (HE20) Channel 1

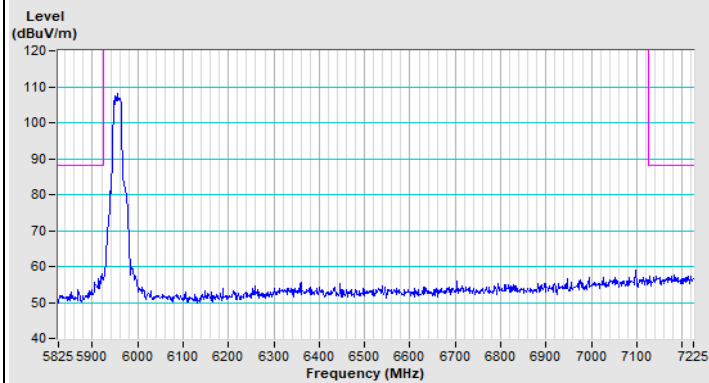


Horizontal (Peak)

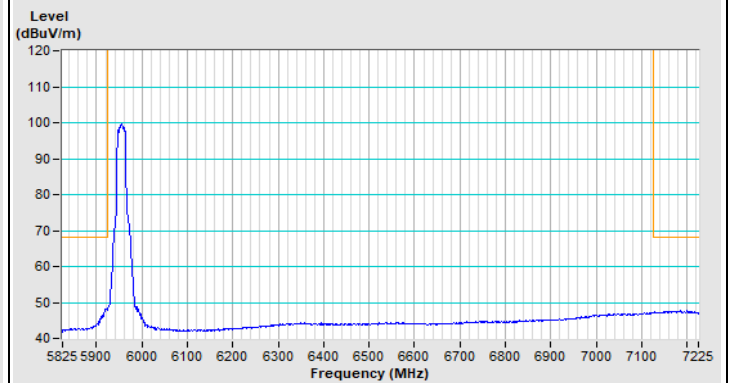

Horizontal (Average)

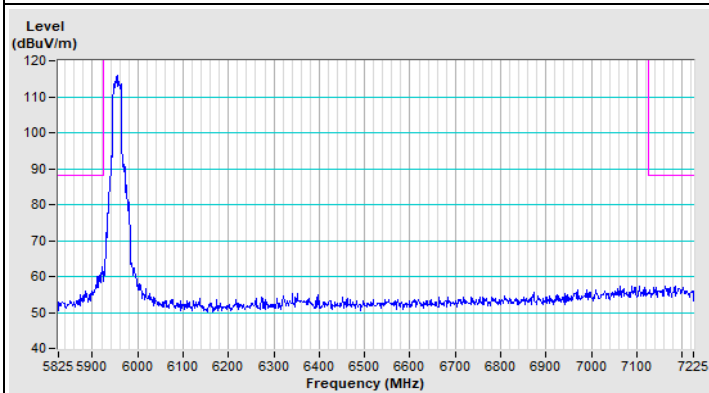


Vertical (Peak)

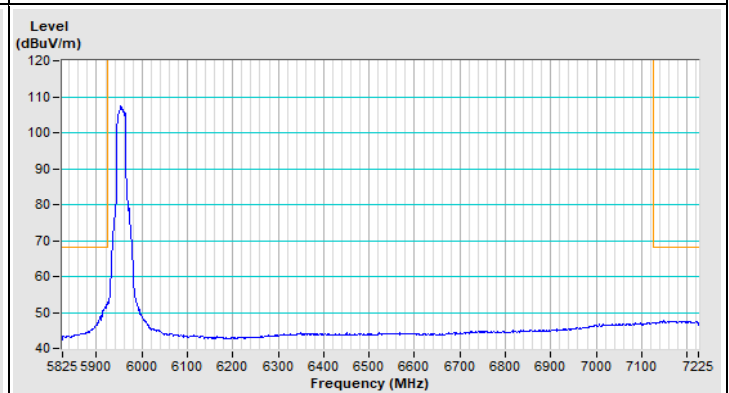


Vertical (Average)


802.11ax (HE20) Channel 181

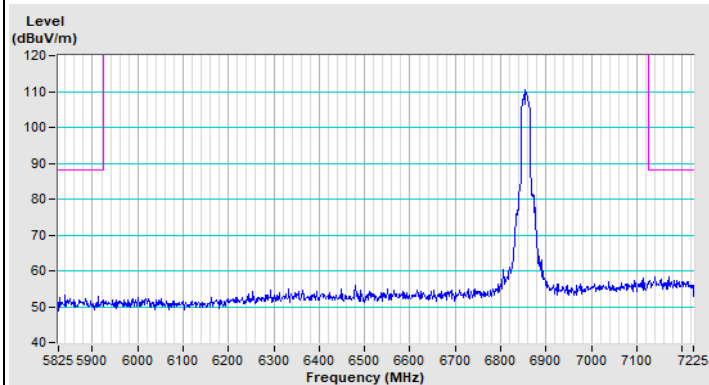


Horizontal (Peak)

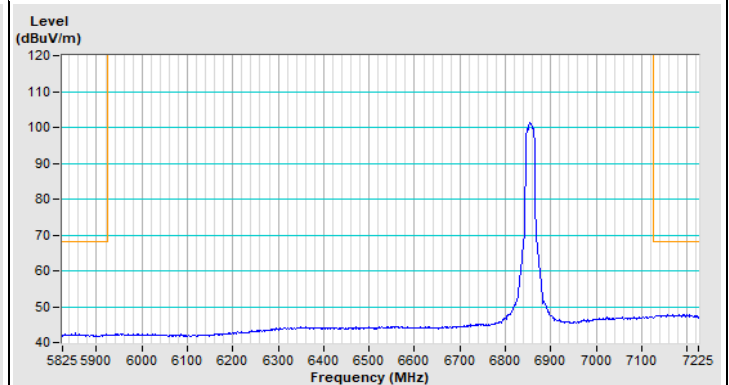

Horizontal (Average)

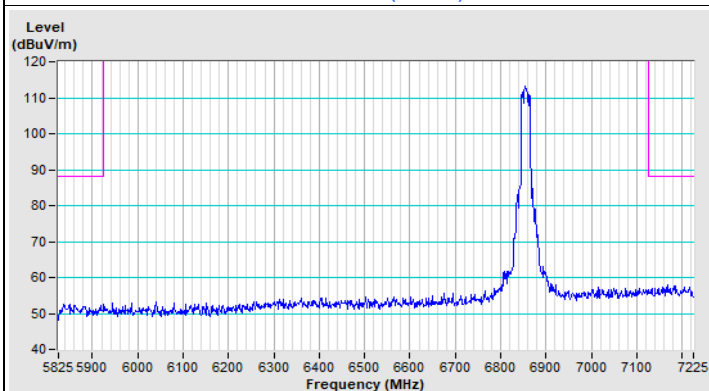


Vertical (Peak)

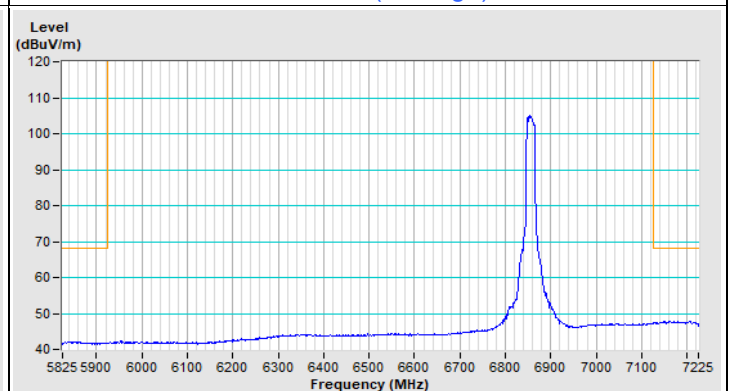


Vertical (Average)


802.11ax (HE40) Channel 3

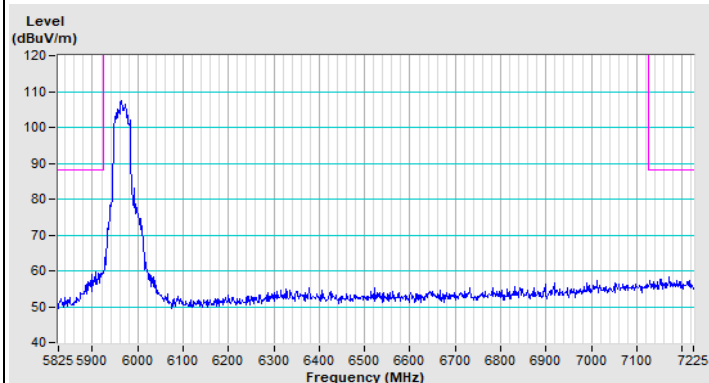


Horizontal (Peak)

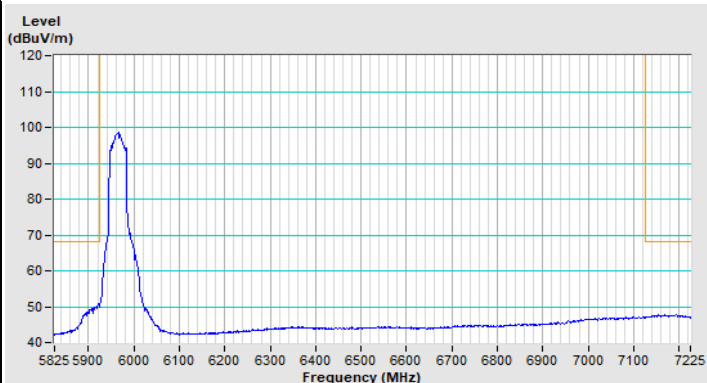

Horizontal (Average)

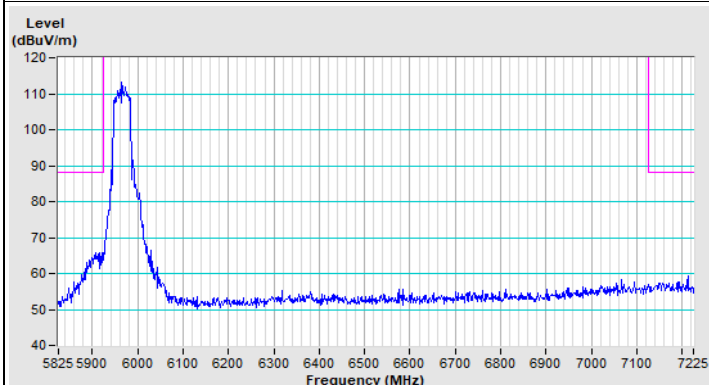


Vertical (Peak)

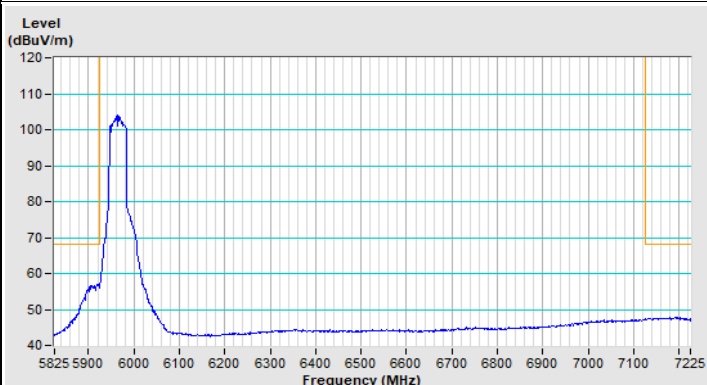


Vertical (Average)


802.11ax (HE40) Channel 179

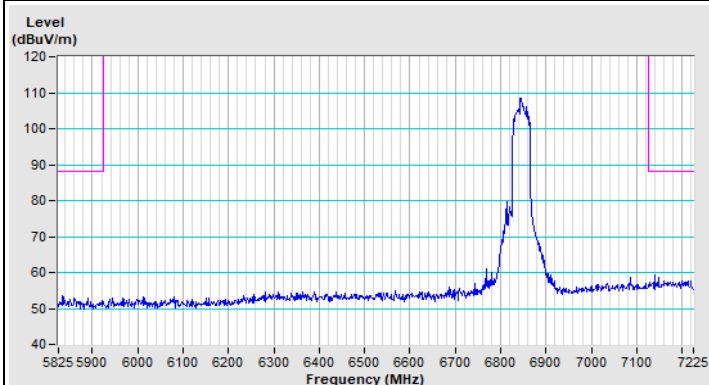


Horizontal (Peak)

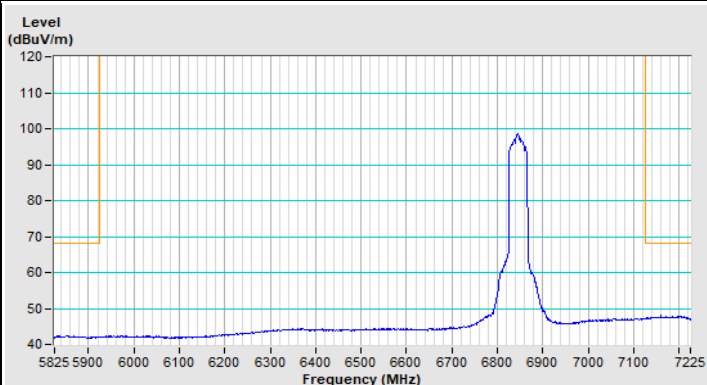

Horizontal (Average)

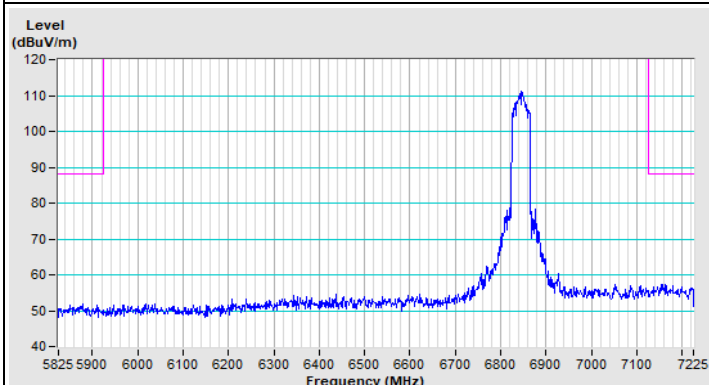


Vertical (Peak)

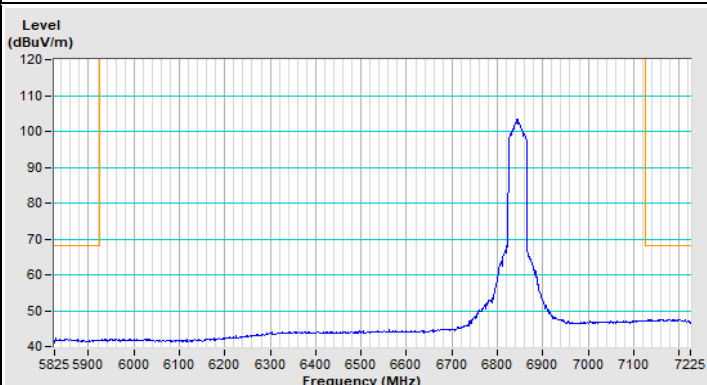


Vertical (Average)


802.11ax (HE80) Channel 7

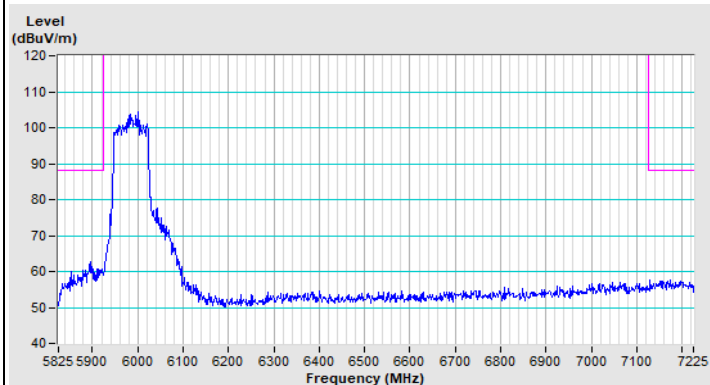


Horizontal (Peak)

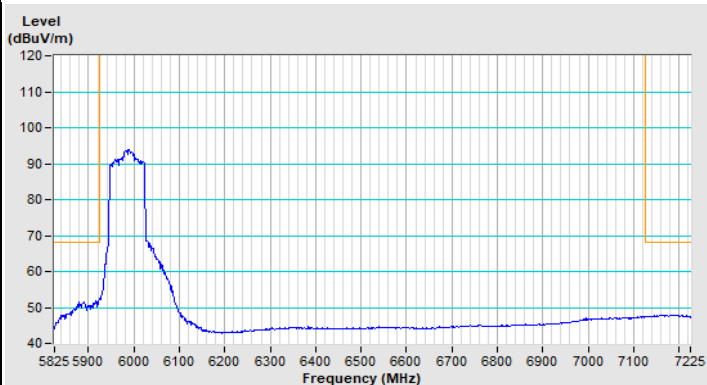

Horizontal (Average)

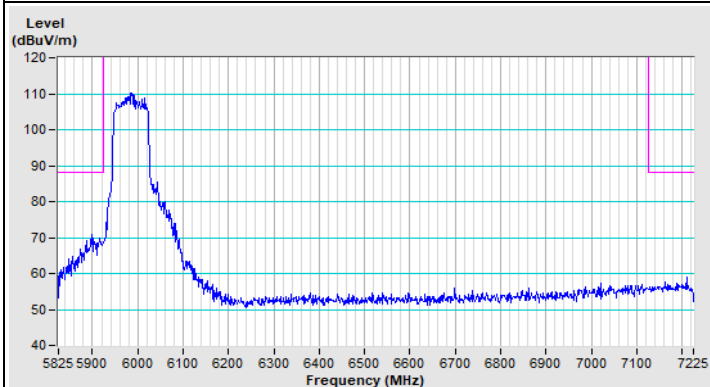


Vertical (Peak)

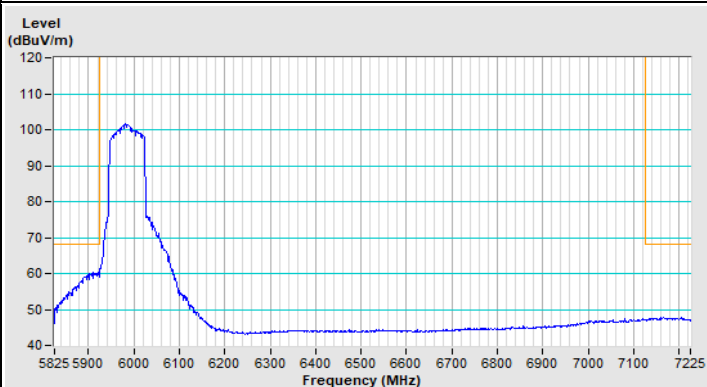


Vertical (Average)


802.11ax (HE80) Channel 167

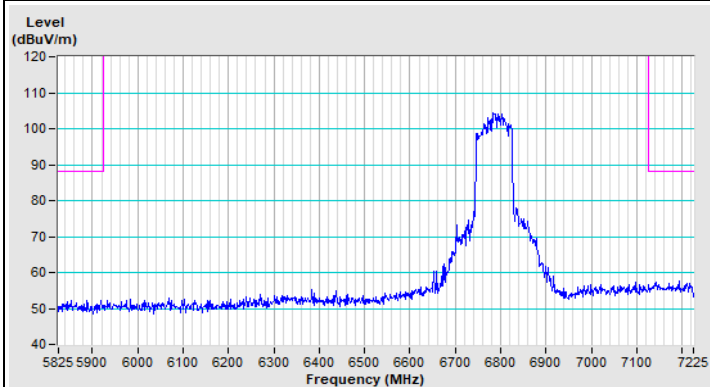


Horizontal (Peak)

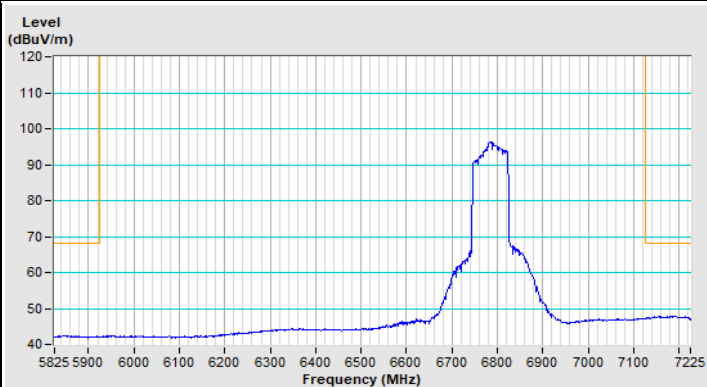

Horizontal (Average)

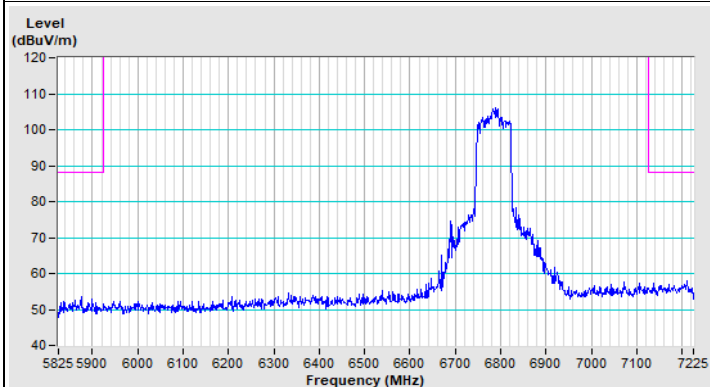


Vertical (Peak)

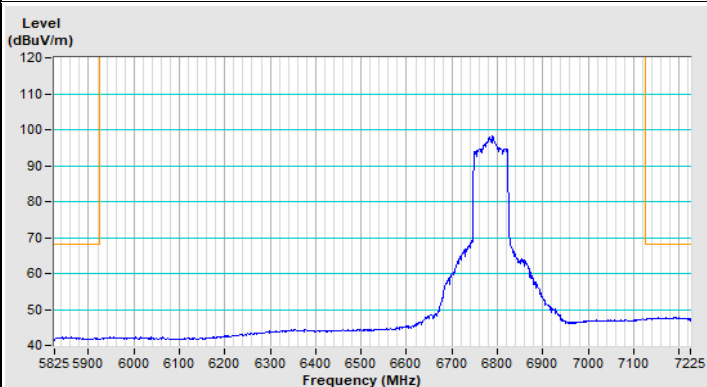


Vertical (Average)

1T1S


802.11ax (HE160) Channel 15

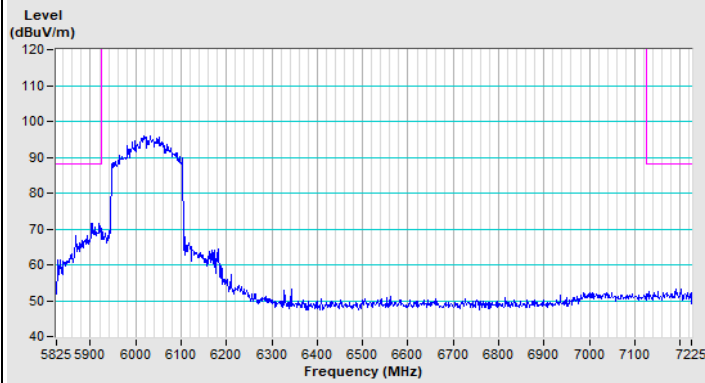


Horizontal (Peak)

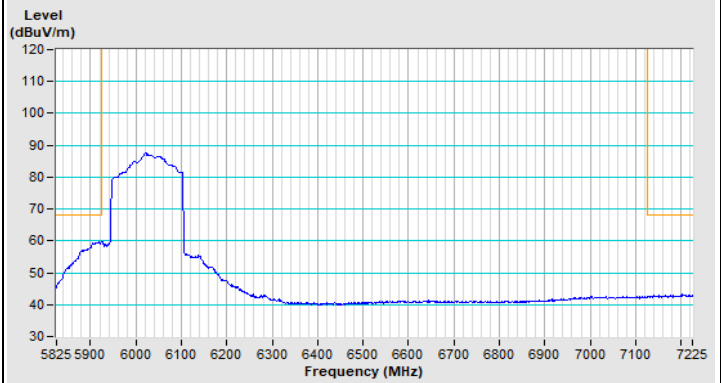

Horizontal (Average)

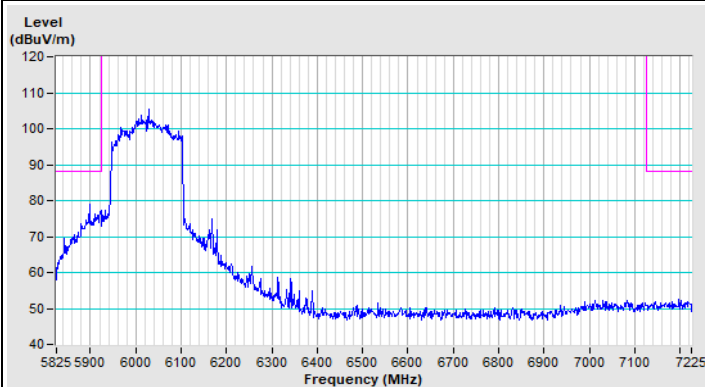


Vertical (Peak)

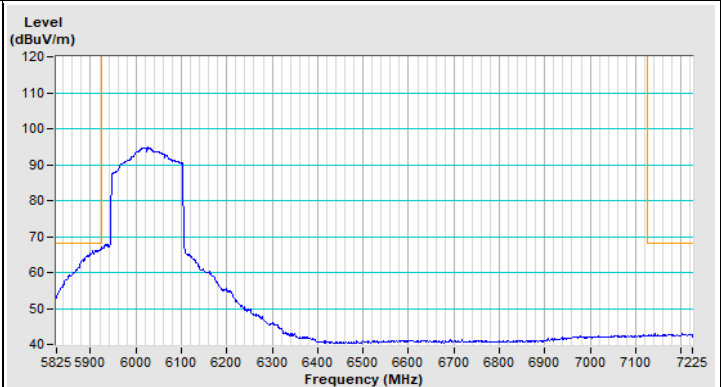


Vertical (Average)


802.11ax (HE160) Channel 143

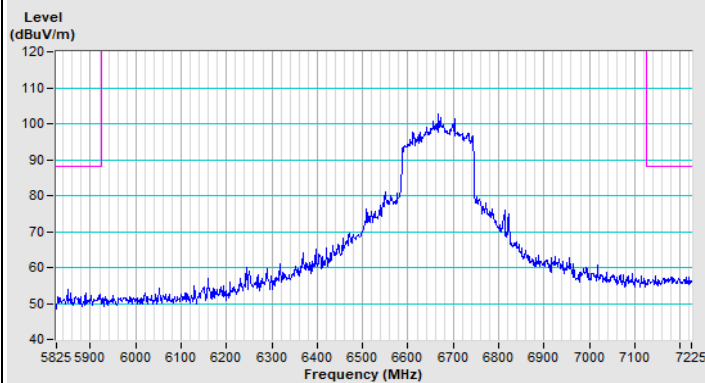


Horizontal (Peak)

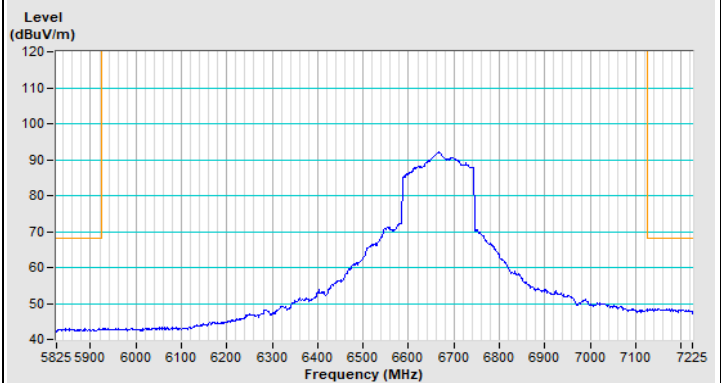

Horizontal (Average)

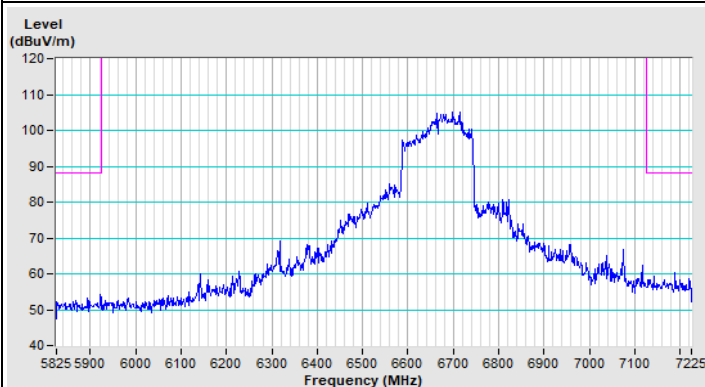


Vertical (Peak)

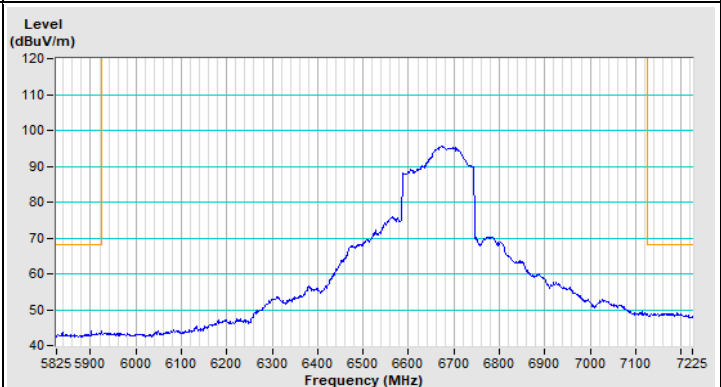


Vertical (Average)

2T1S


802.11ax (HE160) Channel 15

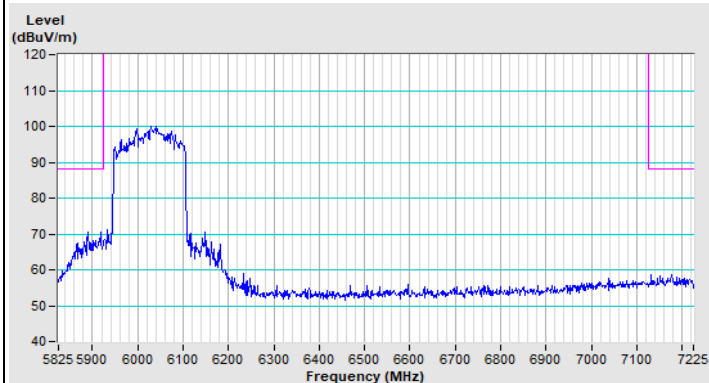


Horizontal (Peak)

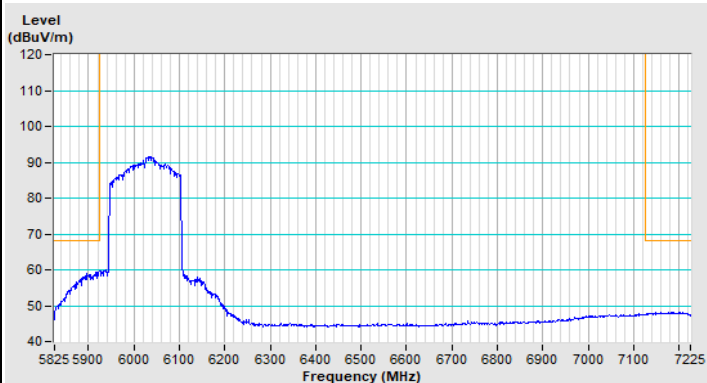

Horizontal (Average)

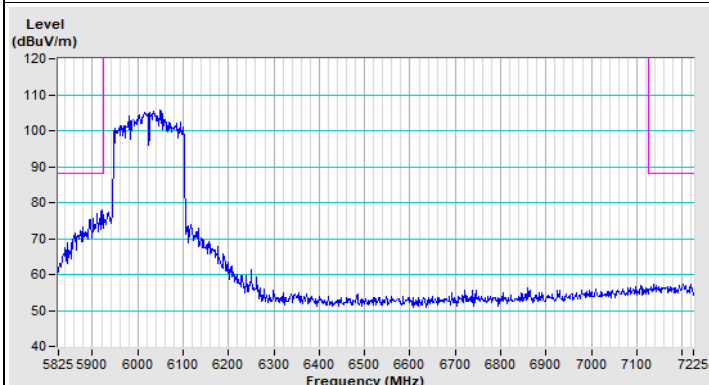


Vertical (Peak)

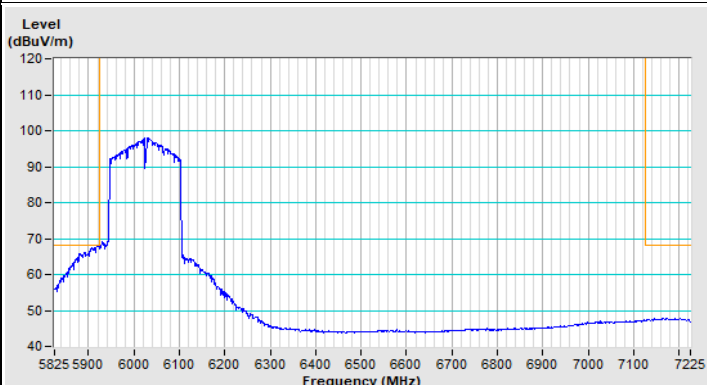


Vertical (Average)


802.11ax (HE160) Channel 143

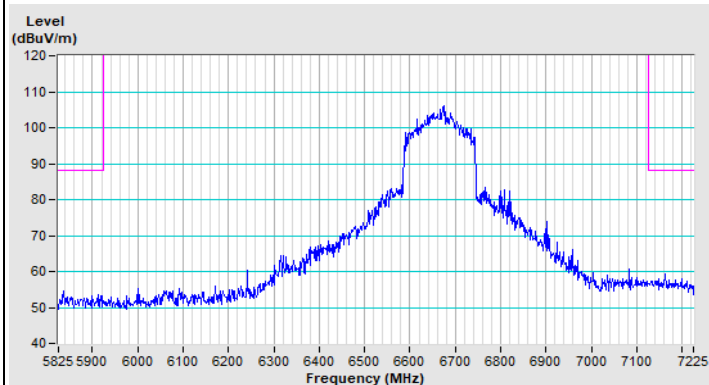


Horizontal (Peak)

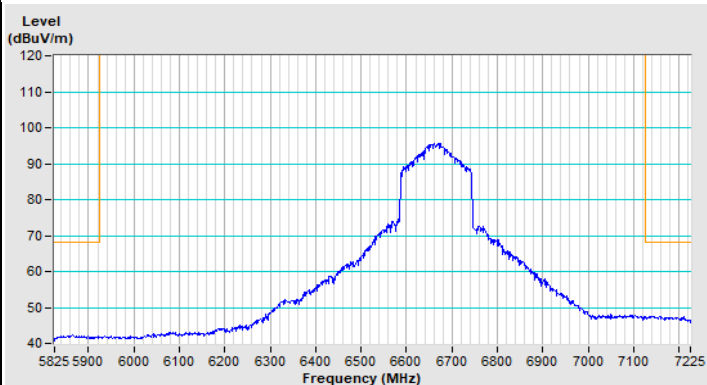

Horizontal (Average)

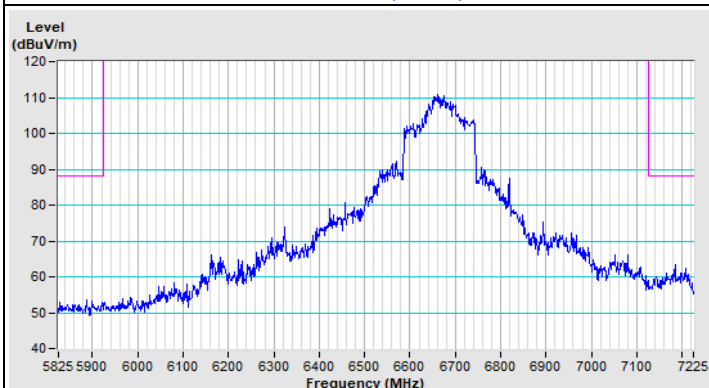


Vertical (Peak)

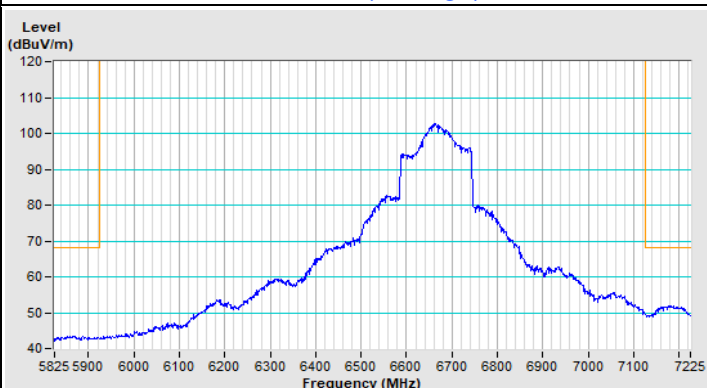


Vertical (Average)

2T1S


20 MHz Preamble 802.11ax (RU26) Channel 1

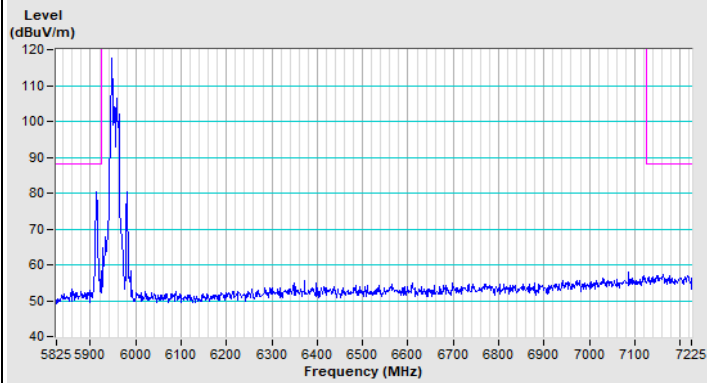


Horizontal (Peak)

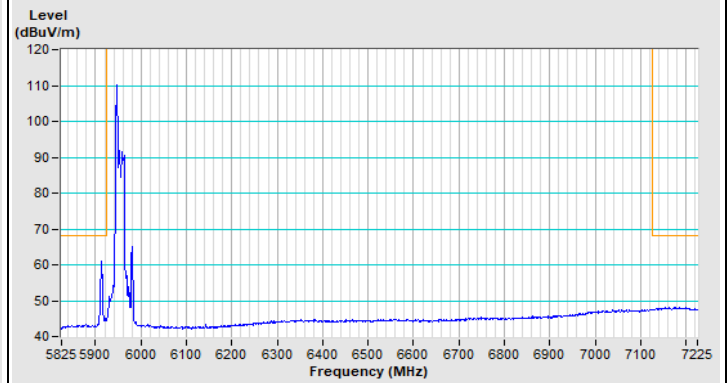

Horizontal (Average)

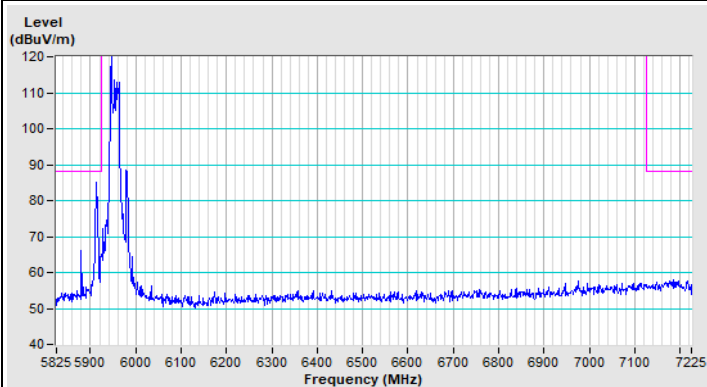


Vertical (Peak)

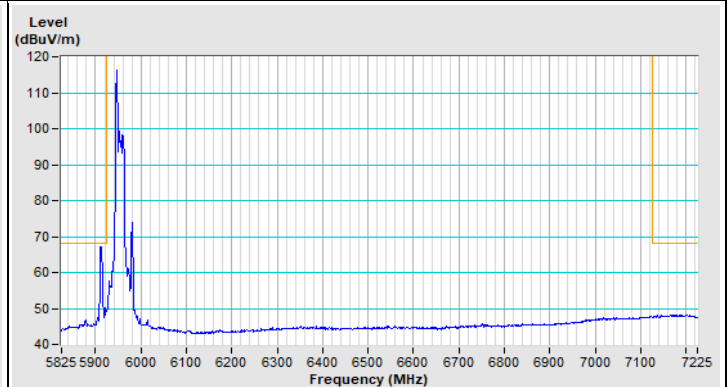


Vertical (Average)


20 MHz Preamble 802.11ax (RU26) Channel 181

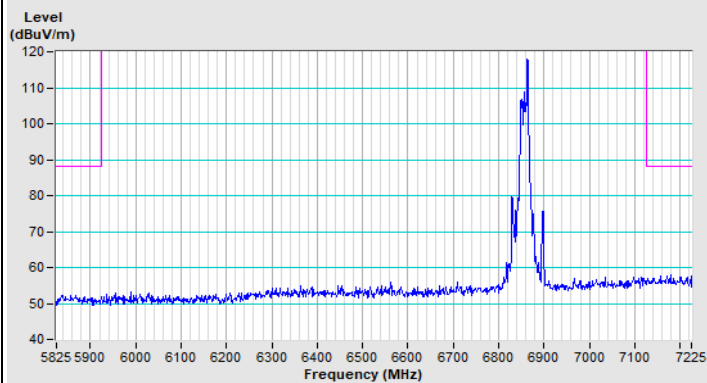


Horizontal (Peak)

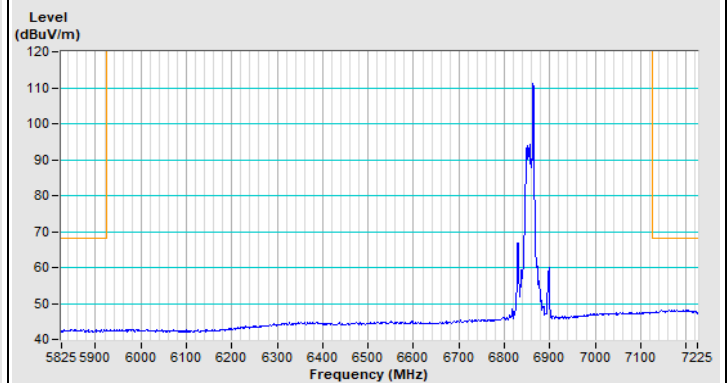

Horizontal (Average)

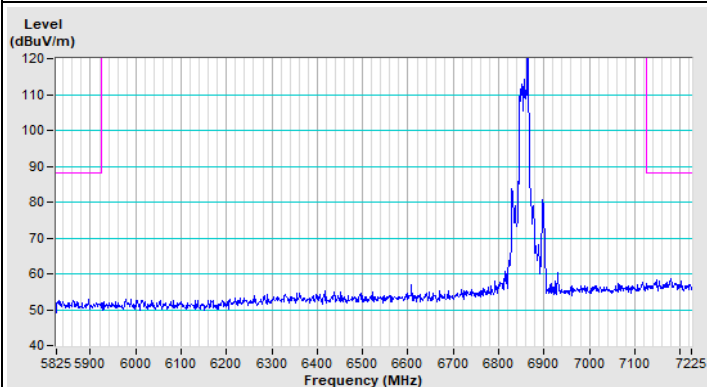


Vertical (Peak)

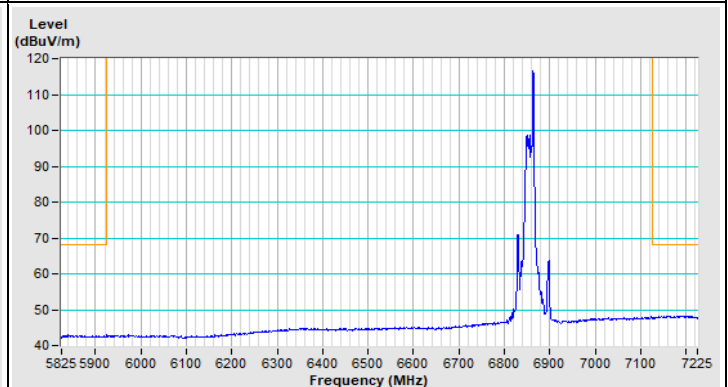


Vertical (Average)


20 MHz Preamble 802.11ax (RU52) Channel 1

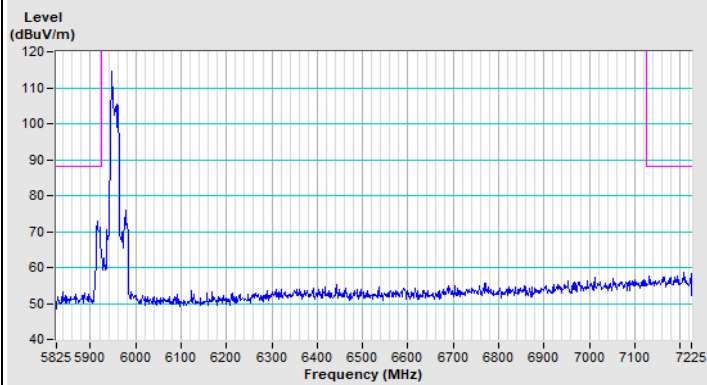


Horizontal (Peak)

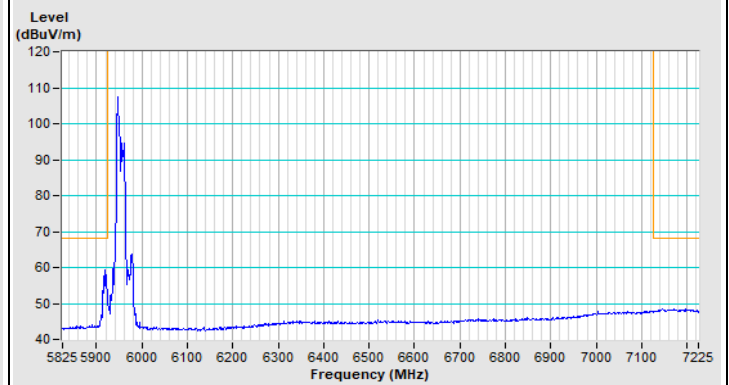

Horizontal (Average)

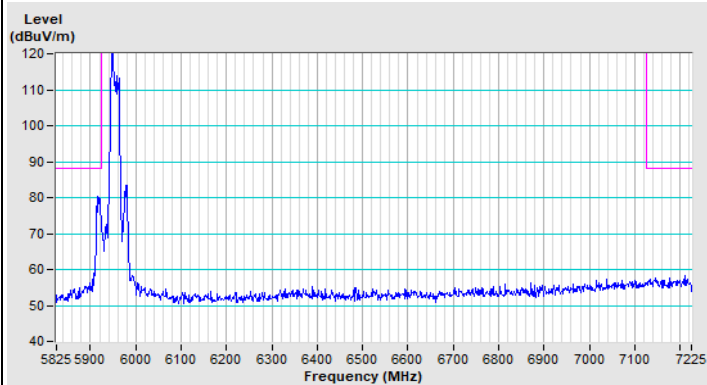


Vertical (Peak)

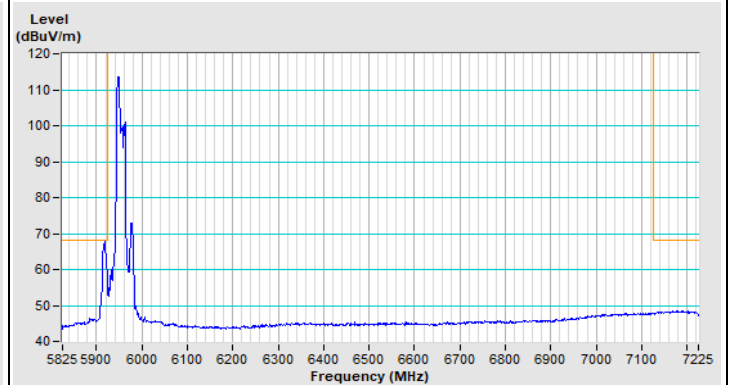


Vertical (Average)


20 MHz Preamble 802.11ax (RU52) Channel 181

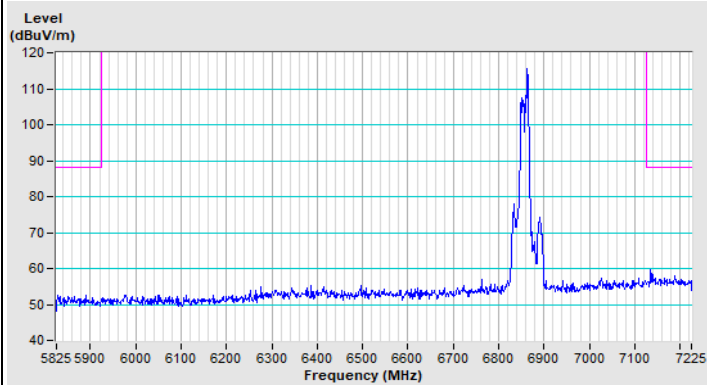


Horizontal (Peak)

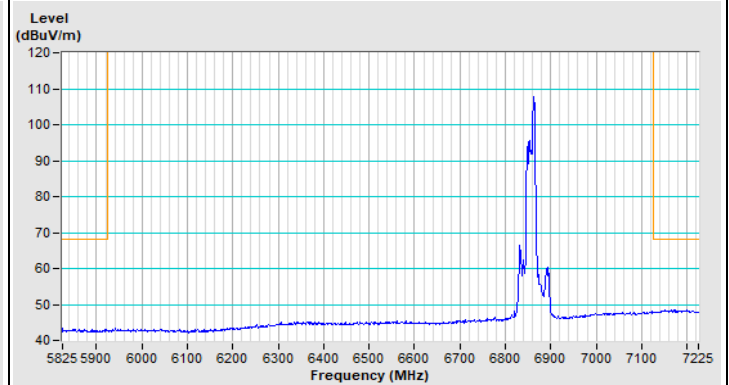

Horizontal (Average)

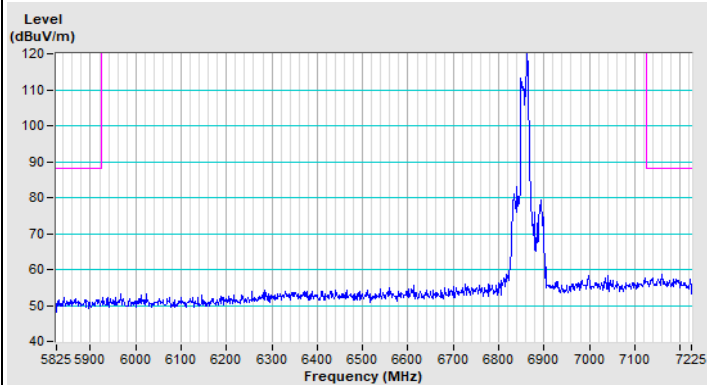


Vertical (Peak)

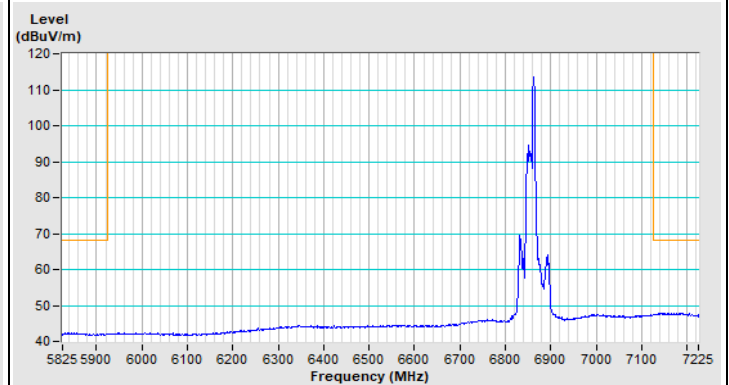


Vertical (Average)


20 MHz Preamble 802.11ax (RU106) Channel 1

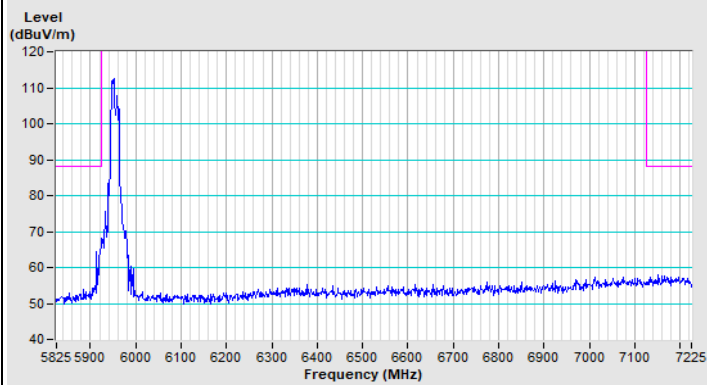


Horizontal (Peak)

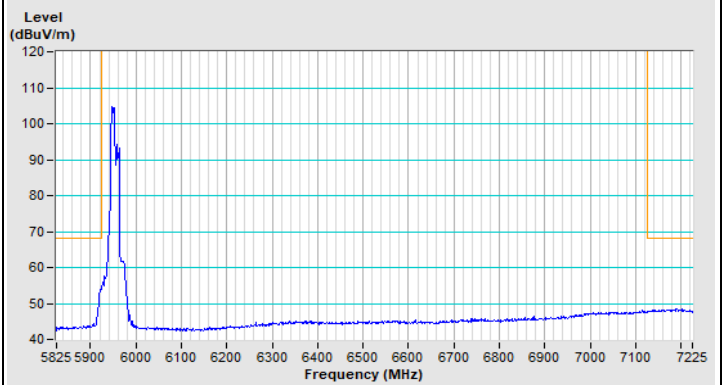

Horizontal (Average)

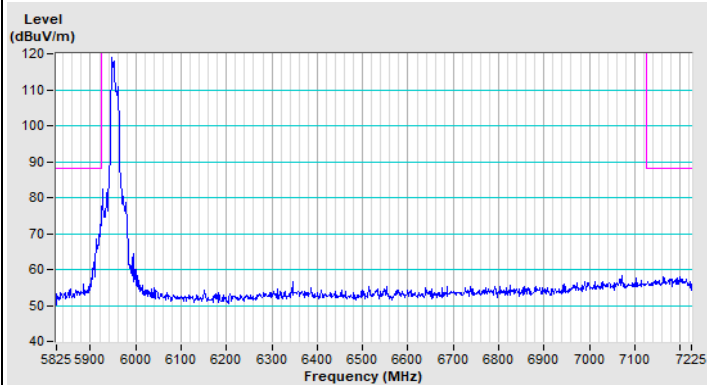


Vertical (Peak)

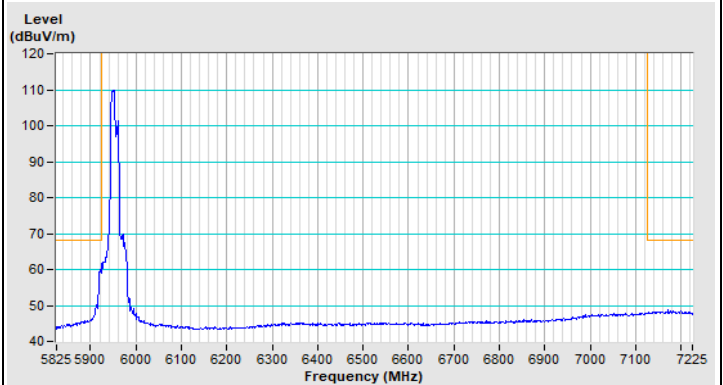


Vertical (Average)


20 MHz Preamble 802.11ax (RU106) Channel 181

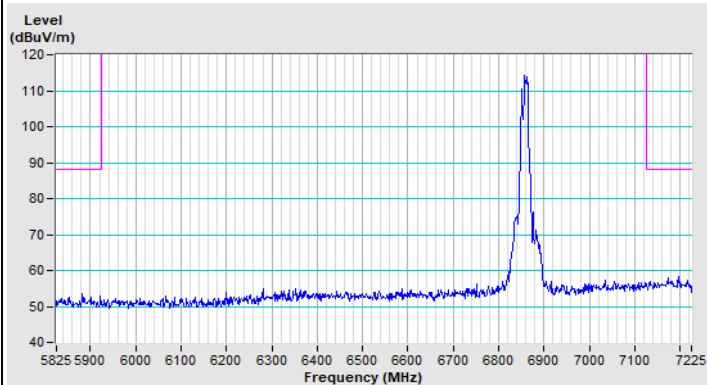


Horizontal (Peak)

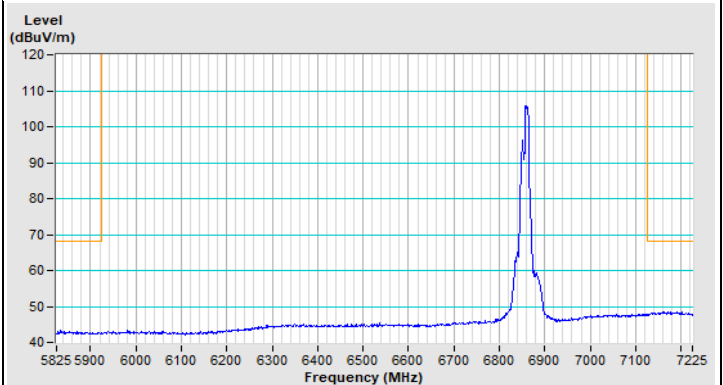

Horizontal (Average)

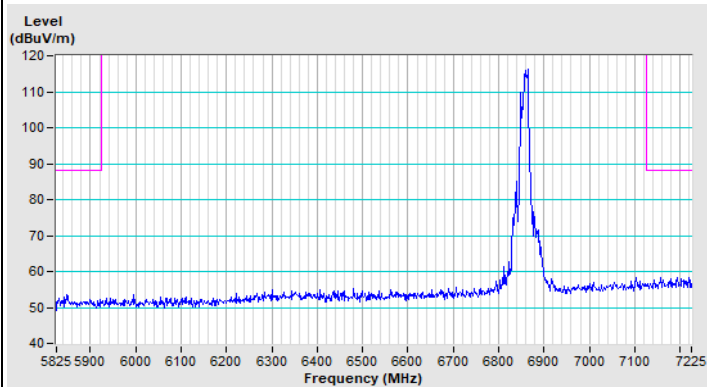

Vertical (Peak)

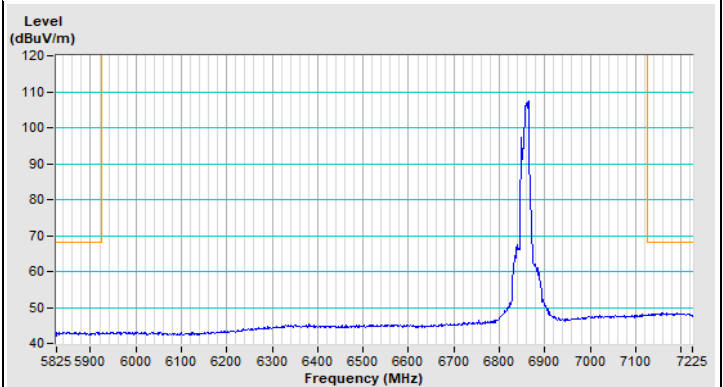

Vertical (Average)

8 Operational Restrictions for 6 GHz U-NII Devices

- (1) Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.
- (2) Transmitters operating under indoor client are limited to indoor locations.
- (3) In the 5.925-7.125 GHz band, client devices must operate under the control of a standard power access point, indoor access point or subordinate devices; In all cases, an exception exists for transmitting brief messages to an access point when attempting to join its network after detecting a signal that confirms that an access point is operating on a particular channel. Client devices are prohibited from connecting directly to another client device.
- (4) Dual client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Device is a {Client Device (controlled of an standard power AP)}, all restrictions are meet the §15.407 (d) requirements. Please refer to the Attestation letter exhibit supplied within this application.

9 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---