

TEST REPORT

Applicant: MediaTek Inc.
Address: No. 1, Dusing 1st Rd., Hsinchu Science Park
Hsinchu City 30078 Taiwan
Equipment Type: 2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card
Model Name: MT7922A22M
Brand Name: N/A
FCC ID: RAS-MT7922A22M
Test Standard: KDB 388624 D02 v18
Sample Arrival Date: Nov. 07, 2023
Test Date: Dec. 01, 2023 - Dec. 05, 2023
Date of Issue: Dec. 26, 2023

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Zhang Jiwei

Checked by: Xu Rui

Approved by: Tolan Tu
(Testing Director)

Zhang Jiwei

Xu Rui

Tolan Tu

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Dec. 26, 2023</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	3
1.1	Test Laboratory	3
1.2	Test Location	3
1.3	Test Environment Condition.....	3
2	PRODUCT INFORMATION	4
2.1	Applicant Information	4
2.2	Manufacturer Information.....	4
2.3	General Description for Equipment under Test (EUT).....	4
2.4	Ancillary Equipment.....	5
2.5	Technical Information	6
2.6	Remarks and Comments	7
3	SUMMARY OF TEST RESULT	8
3.1	Test Standards	8
3.2	Test Results Summary	8
4	MEASUREMENT SYSTEM	9
4.1	Conducted Power Test Setup	9
4.2	G-Sensor Conducted Power Test Procedure	9
5	TEST EQUIPMENTS LIST	10
ANNEX A	CONDUCTED POWER TEST RESULT	11
A.1	Trigger lid angle detection and power verification 2.4GHz.....	11
A.2	Trigger lid angle detection and power verification 5GHz.....	15
A.3	Trigger lid angle detection and power verification 6GHz.....	19

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

1.3 Test Environment Condition

Ambient Temperature	18°C to 25°C
Ambient Relative Humidity	30% to 70%

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	MediaTek Inc.
Address	No. 1, Dusing 1st Rd., Hsinchu Science Park Hsinchu City 30078 Taiwan

2.2 Manufacturer Information

Manufacturer	MediaTek Inc.
Address	No. 1, Dusing 1st Rd., Hsinchu Science Park Hsinchu City 30078 Taiwan

2.3 General Description for Equipment under Test (EUT)

EUT Name	2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card
Model Name Under Test	MT7922A22M
Series Model Name	N/A
Description of Model Name Differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.3.1 Host Information:

Product Description	Notebook Computer
Model Name	IdeaPad 5 2-in-1 14AHP9
Brand Name	Lenovo

2.3.2 Antenna Information:

Antenna Port	Model Name	Antenna Manufacturer	Antenna Type	Antenna Gain (dBi)								
				2.4 GHz	5.15 - 5.25 GHz	5.25 - 5.35 GHz	5.47 - 5.725 GHz	5.725 - 5.895 GHz	5.925 - 6.425 GHz	6.425 - 6.525 GHz	6.525 - 6.875 GHz	6.875 - 7.125 GHz
Main Antenna	AYP6Y-100467	AWAN	PIFA	1.69	3.15	2.42	2.38	3.04	2.76	3.88	3.16	3.27
Auxiliary Antenna	AYP6Y-100468		PIFA	2.22	2.68	2.16	3.21	3.66	3.95	3.46	3.25	3.45
Main Antenna	3.N201.0261	South Star	PIFA	1.89	2.42	2.48	2.96	3.17	2.88	3.17	2.79	2.28
Auxiliary Antenna	3.N201.0262		PIFA	2.29	2.37	2.61	2.22	3.08	3.18	2.62	2.89	2.18

2.4 Ancillary Equipment

Note: Not applicable.

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40), VHT20/40 and 802.11ax(HE20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80/160) and 802.11ax(HE20/40/80/160), U-NII-1/2A/2C/3 6G WIFI 802.11a and 802.11ax(HE20/40/80/160), U-NII-5/6/7/8
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	2.4G WLAN, 5G WLAN, 6G WLAN, Bluetooth	
Frequency Range	802.11b/g	2412 MHz ~ 2472 MHz
	VHT20/VHT40	2412 MHz ~ 2472 MHz
	802.11ax(HE20/HE40)	2412 MHz ~ 2472 MHz
	802.11a	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
	802.11n(HT20/HT40)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
	802.11ac(VHT20/VHT40/VHT80)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
	802.11ax(HE20/HE40/HE80)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
	802.11ac(VHT160)/ax(HE160)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
	802.11a	5925 MHz ~ 6425 MHz
		6425 MHz ~ 6525 MHz
		6525 MHz ~ 6875 MHz
		6875 MHz ~ 7125 MHz
	802.11ax(HE20/HE40/HE80/HE160)	5925 MHz ~ 6425 MHz
		6425 MHz ~ 6525 MHz
		6525 MHz ~ 6875 MHz
		6875 MHz ~ 7125 MHz
	Bluetooth	2402 MHz ~ 2480 MHz
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna	
Hotspot Function	N/A	

Exposure Category	General Population/Uncontrolled exposure	
Product Type	Portable Device	
EUT Type	☒ Production unit	☐ Identical prototype

2.6 Remarks and Comments

The test report is validation of the G sensor functionality

3 SUMMARY OF TEST RESULT

3.1 Test Standards

No.	Identity	Document Title
1	KDB 388624 D02 v18	Pre-Approval Guidance List v18, PRE-APPROVAL GUIDANCE LIST

3.2 Test Results Summary


Device Mode	Lid Angle range	WLAN 2.4GHz(802.11b Channel 6)				WLAN 5GHz(802.11ac80 Channel 155)				WLAN 6GHz(802.11ax160 Channel 111)			
		Tune-up Power (dBm)		Measured Power(dBm)		Tune-up Power (dBm)		Measured Power(dBm)		Tune-up Power (dBm)		Measured Power(dBm)	
		Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna
Laptop	0° - 350°	16.00	16.00	15.90	15.89	16.00	16.00	15.90	15.90	11.00	11.00	10.90	10.90
Tablet	350° - 360°	12.00	12.00	11.86	11.89	10.00	10.00	9.89	9.90	10.00	10.00	9.83	9.88

4 MEASUREMENT SYSTEM

4.1 Conducted Power Test Setup

The conducted power measurement test setup is described in the following and illustrated in below figure.

1. The DUT is convertible PC from Lenovo model IdeaPad 5 2-in-1 14AHP9 MT7922A22M connectivity module is installed.
2. A control PC is used to configure the call box as an access point to manage the uplink and downlink data traffic.
3. Uplink signal power is measured with the Call Box.
4. Path loss in the power measurement setup from the wireless module antenna port to the Call Box.

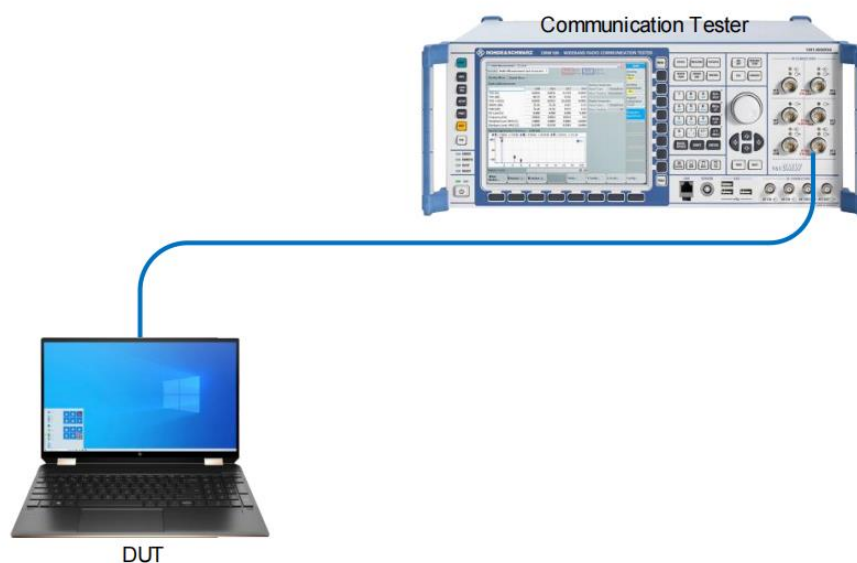

4.2 G-Sensor Conducted Power Test Procedure

The following additional guidance applies only to convertible laptops whose screen rotates around one axis, from 0 degrees to 360 degrees, in a clamshell style, i.e., from closed mode to open mode, to “tent” mode, and finally, to tablet mode. This process must be followed to determine the lid angle where a power reduction occurs, by taking power measurements at each step, as indicated in the step listed here below:

1. From the lid in closed mode (0 degrees), open the screen in 10-degree steps until laptop mode is obtained.
2. Lower the screen by 5 degrees increments to verify that the “closed mode” is triggered.
3. From the position of the previous step, open the screen in 1-degree increments until laptop mode is triggered again.
4. Continue opening the screen in 1-degree increments until at least 5 degrees past where “laptop mode” was obtained, then continue opening the screen in 10-degree steps until the device switches to tablet mode.
5. Reverse the previous procedure to go from tablet mode back down to closed mode.

5 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Communication Tester	Rohde &Schwartz	CMW500	171150	2023/6/19	2024/6/18
RF Cable	N/A	N/A	N/A	N/A	N/A
Note: RF cable loss was verified before usage.					

ANNEX A CONDUCTED POWER TEST RESULT

A.1 Trigger lid angle detection and power verification 2.4GHz

A.1.1 The lid is rotating from 0° to 360°

Mode	Angle (degrees)	Measured Power	
		2.4GHz 802.11b Ch6	
		(dBm)	
		Main	Aux.
Laptop	0	15.62	15.55
	10	15.55	15.81
	20	15.56	15.82
	30	15.58	15.87
	40	15.56	15.77
	50	15.87	15.60
	60	15.76	15.73
	70	15.79	15.65
	80	15.67	15.71
	90	15.90	15.86
	100	15.62	15.57
	110	15.64	15.56
	120	15.59	15.75
	130	15.84	15.85
	140	15.60	15.75
	150	15.60	15.63
	160	15.69	15.83
	170	15.90	15.76
	180	15.89	15.74
	190	15.86	15.81
	200	15.70	15.66
	210	15.72	15.89
	220	15.61	15.65
	230	15.75	15.68
	240	15.55	15.76
	250	15.78	15.78
	260	15.79	15.68
	270	15.80	15.89
	280	15.77	15.69
	290	15.71	15.74
	300	15.74	15.67
	310	15.56	15.85
	320	15.75	15.72

	330	15.73	15.80
	340	15.78	15.69
Tablet	350	11.57	11.83
Laptop	345	15.88	15.79
	346	15.65	15.65
	347	15.79	15.66
	348	15.73	15.70
	349	15.61	15.71
Tablet	350	11.65	11.78
	351	11.76	11.66
	352	11.76	11.76
	353	11.61	11.85
	354	11.86	11.89
	355	11.60	11.63
	360	11.77	11.76

A.1.2 The lid is rotating from 360° to 0°

Mode	Angle (degrees)	Measured Power	
		2.4GHz 802.11b Ch6	
		(dBm)	
		Main	Aux.
Tablet	360	11.65	11.69
	350	11.86	11.64
Laptop	340	15.87	15.58
	345	15.89	15.73
Tablet	350	11.85	11.66
Laptop	349	15.69	15.80
	348	15.65	15.58
	347	15.72	15.61
	346	15.69	15.60
	345	15.70	15.74
	340	15.58	15.62
	330	15.86	15.57
	320	15.77	15.71
	310	15.76	15.74
	300	15.83	15.78
	290	15.73	15.56
	280	15.60	15.62
	270	15.65	15.76
	260	15.88	15.80
	250	15.71	15.62
	240	15.72	15.71
	230	15.82	15.76
	220	15.74	15.60
	210	15.64	15.64
	200	15.89	15.71
	190	15.86	15.61
	180	15.76	15.69
	170	15.57	15.88
	160	15.55	15.72
	150	15.61	15.74
	140	15.67	15.89
	130	15.66	15.79
	120	15.57	15.73
	110	15.55	15.77
	100	15.67	15.64
	90	15.83	15.79
	80	15.80	15.68

	70	15.55	15.59
	60	15.55	15.69
	50	15.77	15.75
	40	15.77	15.56
	30	15.83	15.75
	20	15.57	15.56
	10	15.65	15.69
	0	15.62	15.68

A.2 Trigger lid angle detection and power verification 5GHz

A.2.1 The lid is rotating from 0° to 360°

Mode	Angle (degrees)	Measured Power	
		5GHz 802.11ac80 Ch155	
		(dBm)	
		Main	Aux.
Laptop	0	15.70	15.61
	10	15.66	15.84
	20	15.65	15.64
	30	15.78	15.58
	40	15.60	15.70
	50	15.66	15.81
	60	15.84	15.81
	70	15.78	15.65
	80	15.88	15.87
	90	15.70	15.82
	100	15.70	15.87
	110	15.66	15.90
	120	15.71	15.56
	130	15.70	15.74
	140	15.59	15.61
	150	15.60	15.75
	160	15.87	15.55
	170	15.79	15.83
	180	15.74	15.83
	190	15.86	15.86
	200	15.64	15.87
	210	15.69	15.70
	220	15.65	15.82
	230	15.90	15.84
	240	15.62	15.79
	250	15.74	15.59
	260	15.62	15.78
	270	15.70	15.89
	280	15.63	15.89
	290	15.73	15.80
	300	15.66	15.63
	310	15.60	15.84
	320	15.62	15.85
	330	15.80	15.75
	340	15.85	15.62

Tablet	350	9.76	9.70
Laptop	345	15.89	15.77
	346	15.90	15.74
	347	15.56	15.76
	348	15.74	15.80
	349	15.76	15.80
Tablet	350	9.80	9.66
	351	9.82	9.90
	352	9.88	9.73
	353	9.85	9.82
	354	9.89	9.57
	355	9.79	9.83
	360	9.78	9.58

A.2.2 The lid is rotating from 360° to 0°

Mode	Angle (degrees)	Measured Power	
		5GHz 802.11ac80 Ch155	
		(dBm)	
		Main	Aux.
Tablet	360	9.81	9.68
	350	9.67	9.83
Laptop	340	15.89	15.55
	345	15.63	15.73
Tablet	350	9.77	9.68
Laptop	349	15.59	15.85
	348	15.60	15.69
	347	15.75	15.75
	346	15.82	15.74
	345	15.71	15.77
	340	15.85	15.70
	330	15.70	15.63
	320	15.89	15.76
	310	15.70	15.70
	300	15.60	15.79
	290	15.64	15.72
	280	15.69	15.87
	270	15.70	15.88
	260	15.81	15.75
	250	15.56	15.78
	240	15.57	15.63
	230	15.90	15.78
	220	15.81	15.87
	210	15.79	15.59
	200	15.74	15.84
	190	15.68	15.63
	180	15.73	15.56
	170	15.70	15.86
	160	15.64	15.89
	150	15.73	15.72
	140	15.85	15.71
	130	15.65	15.63
	120	15.85	15.74
	110	15.73	15.64
	100	15.85	15.58
	90	15.84	15.70
	80	15.88	15.72

	70	15.78	15.70
	60	15.75	15.72
	50	15.60	15.57
	40	15.86	15.63
	30	15.59	15.56
	20	15.60	15.86
	10	15.81	15.55
	0	15.58	15.61

A.3 Trigger lid angle detection and power verification 6GHz

A.3.1 The lid is rotating from 0° to 360°

Mode	Angle (degrees)	Measured Power	
		6GHz 802.11ax160 Ch111	
		(dBm)	
		Main	Aux.
Laptop	0	10.81	10.66
	10	10.58	10.72
	20	10.80	10.68
	30	10.57	10.86
	40	10.63	10.74
	50	10.70	10.86
	60	10.84	10.61
	70	10.60	10.83
	80	10.81	10.74
	90	10.55	10.80
	100	10.71	10.75
	110	10.60	10.61
	120	10.87	10.90
	130	10.59	10.90
	140	10.81	10.85
	150	10.73	10.59
	160	10.60	10.77
	170	10.55	10.74
	180	10.78	10.64
	190	10.84	10.81
	200	10.72	10.63
	210	10.67	10.69
	220	10.77	10.79
	230	10.67	10.57
	240	10.85	10.77
	250	10.72	10.75
	260	10.76	10.79
	270	10.59	10.74
	280	10.90	10.57
	290	10.58	10.79
	300	10.60	10.85
	310	10.65	10.60
	320	10.65	10.80
	330	10.58	10.83
	340	10.80	10.69

Tablet	350	9.55	9.86
Laptop	345	10.77	10.72
	346	10.87	10.72
	347	10.66	10.57
	348	10.73	10.88
	349	10.62	10.84
Tablet	350	9.64	9.76
	351	9.68	9.66
	352	9.74	9.88
	353	9.81	9.72
	354	9.83	9.71
	355	9.75	9.60
	360	9.81	9.66

A.3.2 The lid is rotating from 360° to 0°

Mode	Angle (degrees)	Measured Power	
		6GHz 802.11ax160 Ch111	
		(dBm)	
		Main	Aux.
Tablet	360	9.60	9.76
	350	9.80	9.78
Laptop	340	10.70	10.84
	345	10.66	10.80
Tablet	350	9.67	9.57
Laptop	349	10.72	10.65
	348	10.66	10.85
	347	10.55	10.78
	346	10.75	10.69
	345	10.90	10.61
	340	10.70	10.73
	330	10.82	10.66
	320	10.78	10.55
	310	10.88	10.70
	300	10.73	10.84
	290	10.89	10.55
	280	10.58	10.60
	270	10.73	10.89
	260	10.72	10.67
	250	10.64	10.85
	240	10.78	10.77
	230	10.70	10.90
	220	10.57	10.61
	210	10.67	10.90
	200	10.78	10.62
	190	10.76	10.80
	180	10.86	10.75
	170	10.77	10.75
	160	10.71	10.77
	150	10.57	10.57
	140	10.62	10.85
	130	10.60	10.72
	120	10.85	10.61
	110	10.57	10.71
	100	10.61	10.61
	90	10.57	10.57
	80	10.67	10.71

	70	10.78	10.90
	60	10.88	10.72
	50	10.85	10.82
	40	10.76	10.72
	30	10.84	10.77
	20	10.68	10.80
	10	10.61	10.61
	0	10.75	10.74

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--