


Photographs of EUT Setup and Antenna Location


The photographs of EUT and setup for SAR testing are shown as follows.

<Front Face View>Laptop Mode (180°)

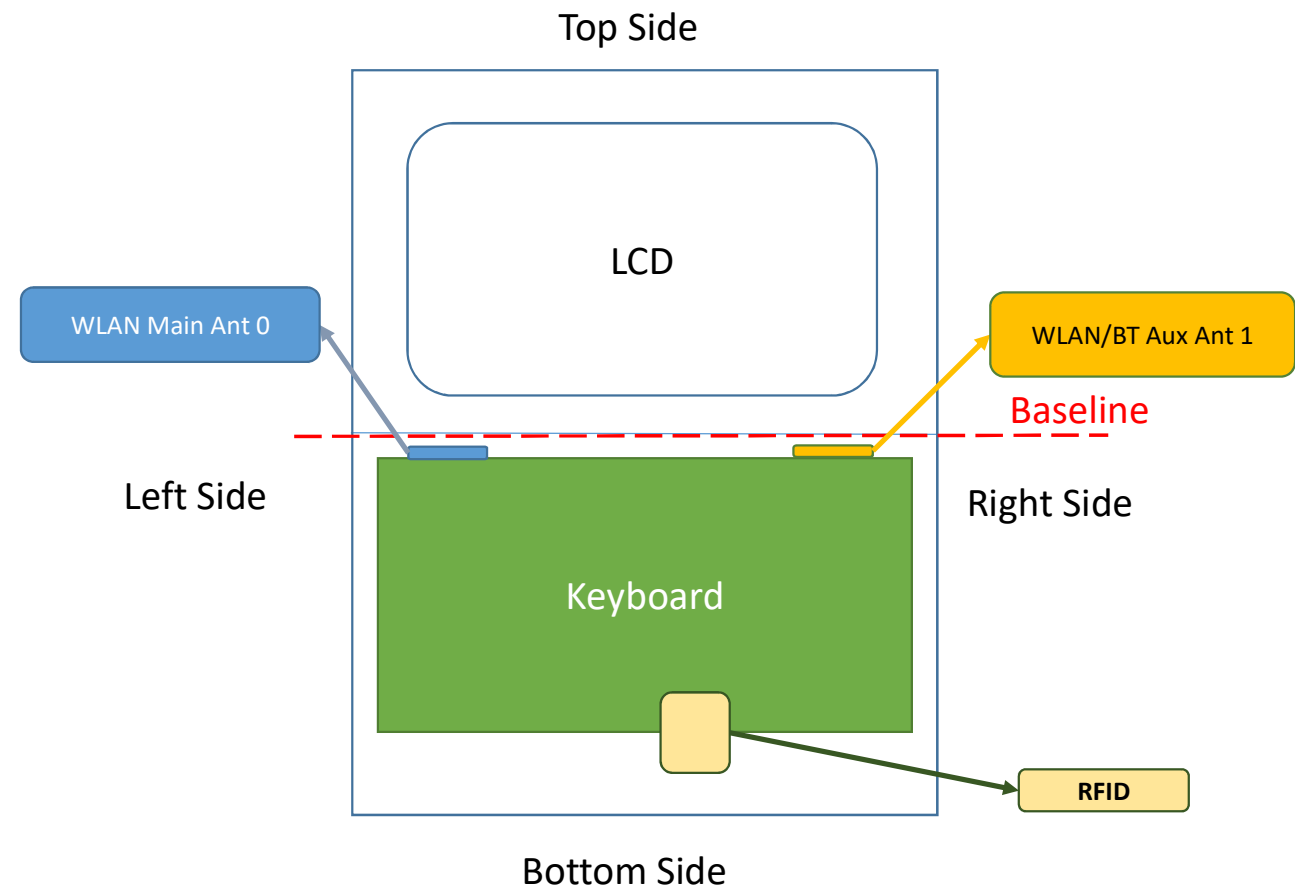


Antenna	To Baseline	To Bottom	To Left Side	To Right Side	To Top Side
	(mm)	(mm)	(mm)	(mm)	(mm)
WLAN Main Ant 0	15.00	200.00	20.00	250.00	214.00
WLAN/BT Aux Ant 1	15.00	200.00	250.00	20.00	214.00
RFID	152.00	24.00	166.00	107.00	

<Right Side View> Laptop Mode(90°)

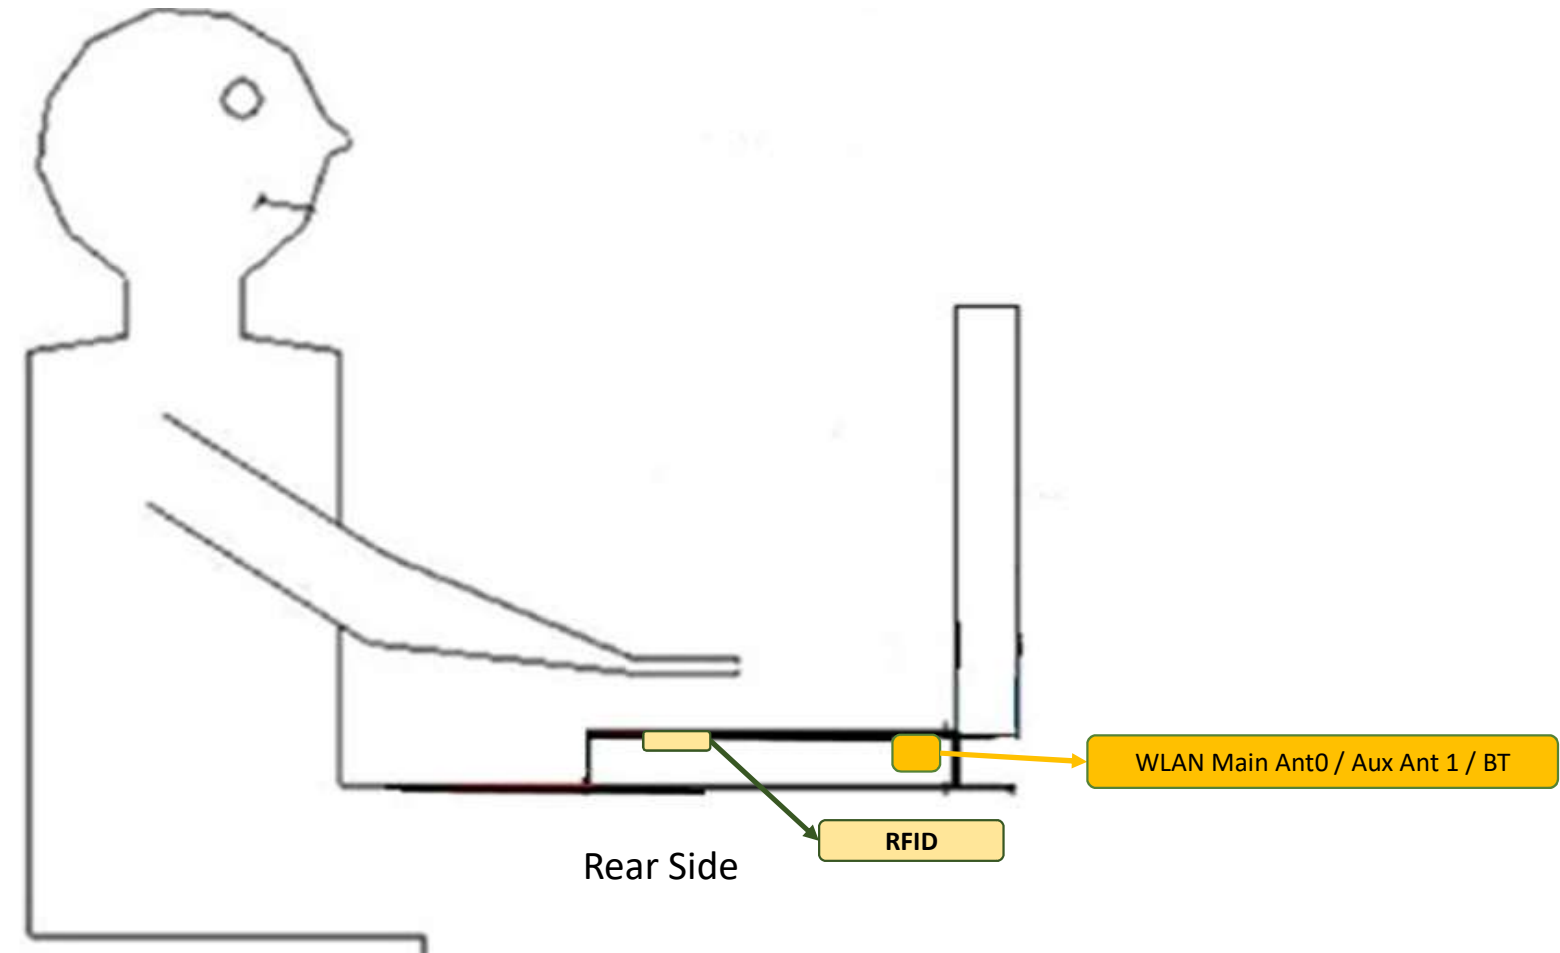


Antenna	Rear Face	(w/o Bumper)
	(mm)	
WLAN Main Ant 0	2.00	(w/o Bumper)
WLAN/BT Aux Ant 1	2.00	(w/o Bumper)
RFID	13.40	

<Front Face View> Tablet

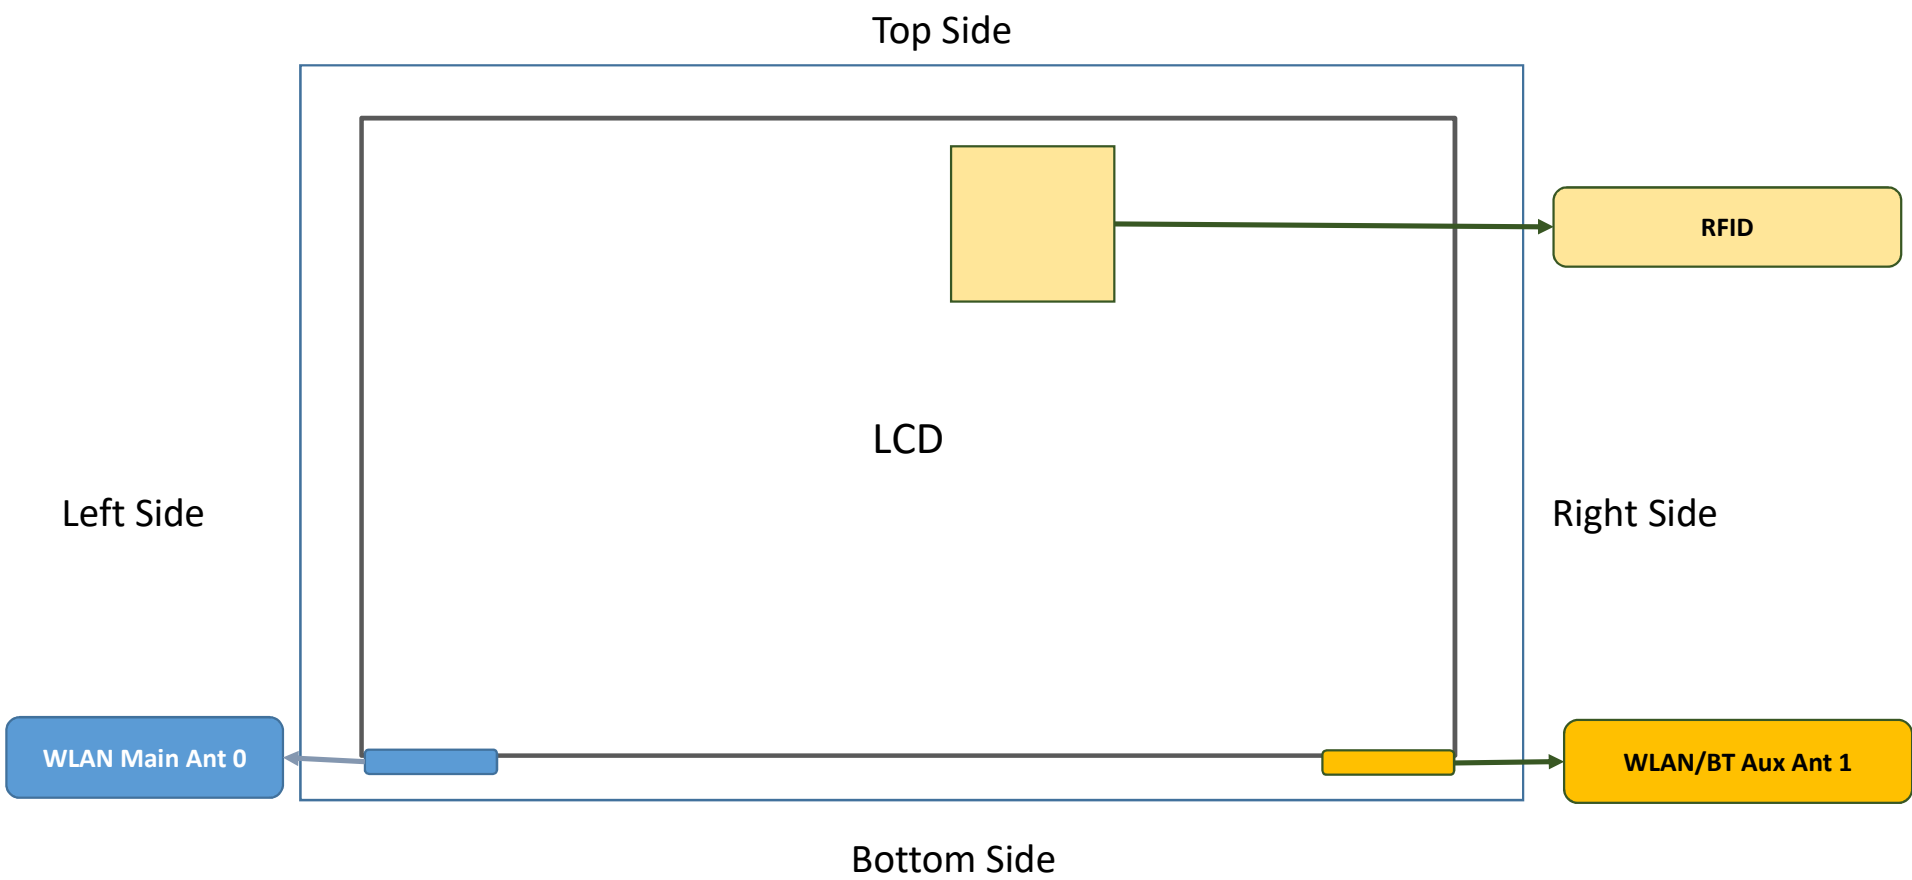

Antenna	To Top Side	To Bottom Side	To Left Side	To Right Side
	(mm)	(mm)	(mm)	(mm)
WLAN Main Ant 0	200.00	15.00	20.00	250.00
WLAN/BT Aux Ant 1	200.00	15.00	250.00	20.00
RFID	24.00	152.00	166.00	107.00

<Rear Face View> Tablet

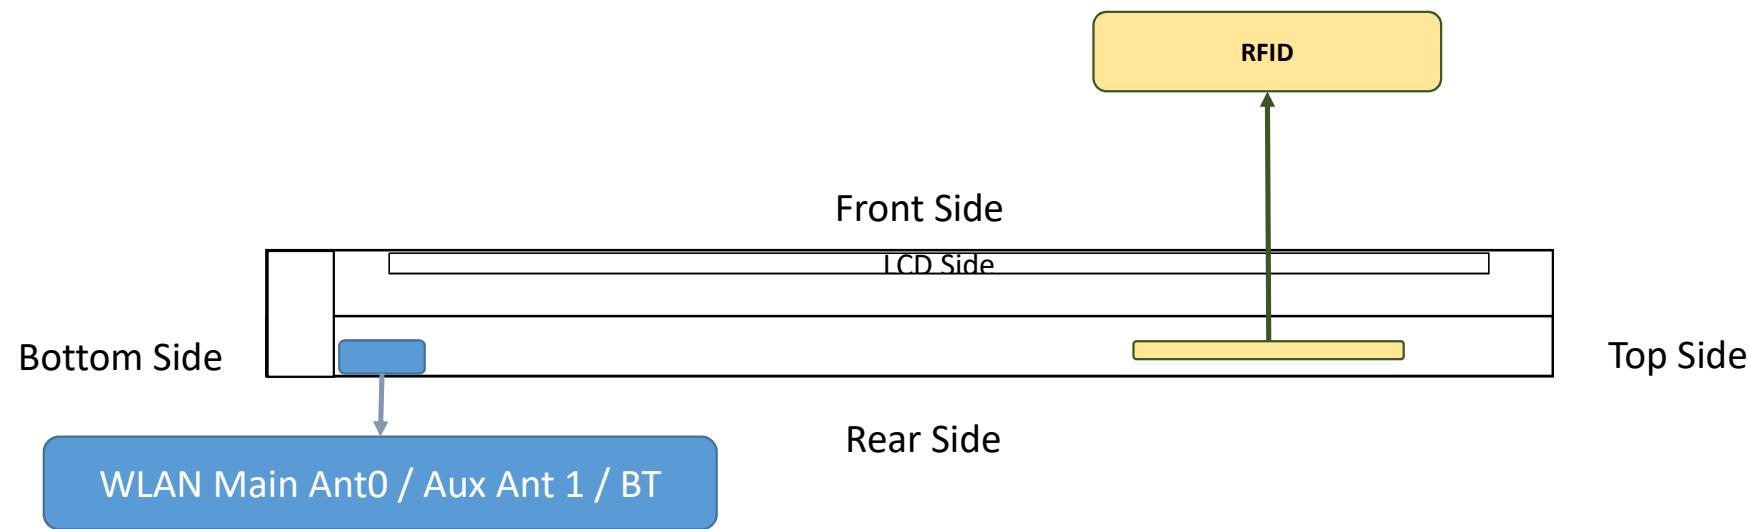

Antenna	To Front Side	To Rear Side
	(mm)	(mm)
WLAN Main Ant 0	10.00	0.00
WLAN/BT Aux Ant 1	10.00	0.00
RFID	21.00	3.00

<Photographs of Body SAR Test Setup>



Bottom of Laptop Mode Tested at 0 mm



Keyboard Left Side of Laptop Tested at 0 mm



Keyboard Right Side of Laptop Tested at 0 mm


<Photographs of Body SAR Test Setup>



Rear Face of Tablet Mode Tested at 0 mm



Left Side of Tablet Mode Tested at 0 mm

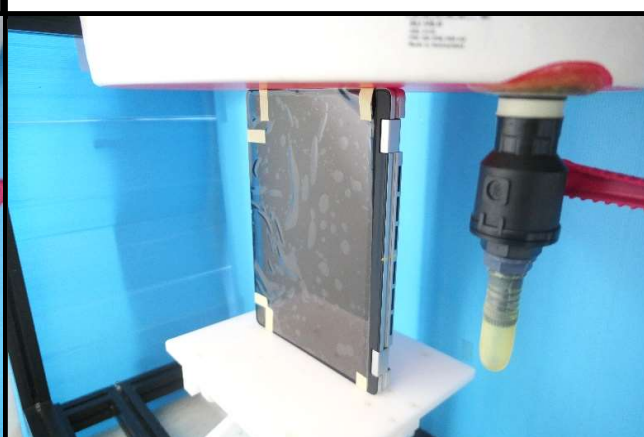

Right Side of Tablet Mode Tested at 0 mm



Top Side of Tablet Mode Tested at 0 mm



Bottom Side of Tablet Tested at 0 mm

<Photographs of Power Density Test Setup>



Bottom of EUT Tested at 0 mm