



Plots of EUT ceased transmission in the time domain

6G_UNII5_BW160_CH47_6110_a9_TRS

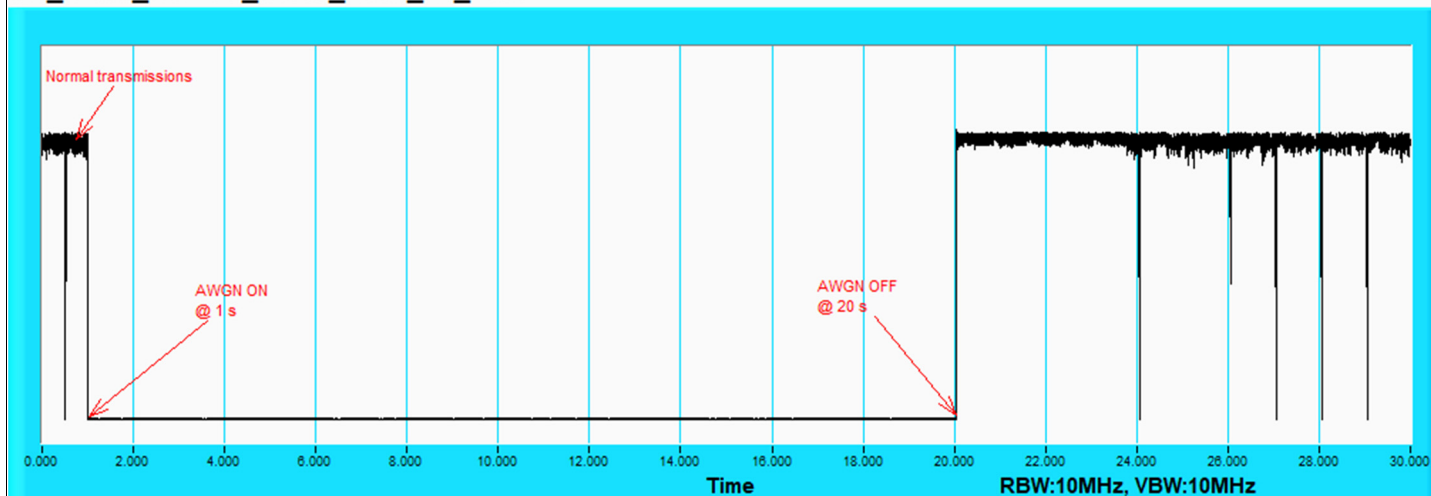


802.11be (EHT160) / CH47(Low Edge)

6G_UNII5_BW160_CH47_6185_a9_TRS

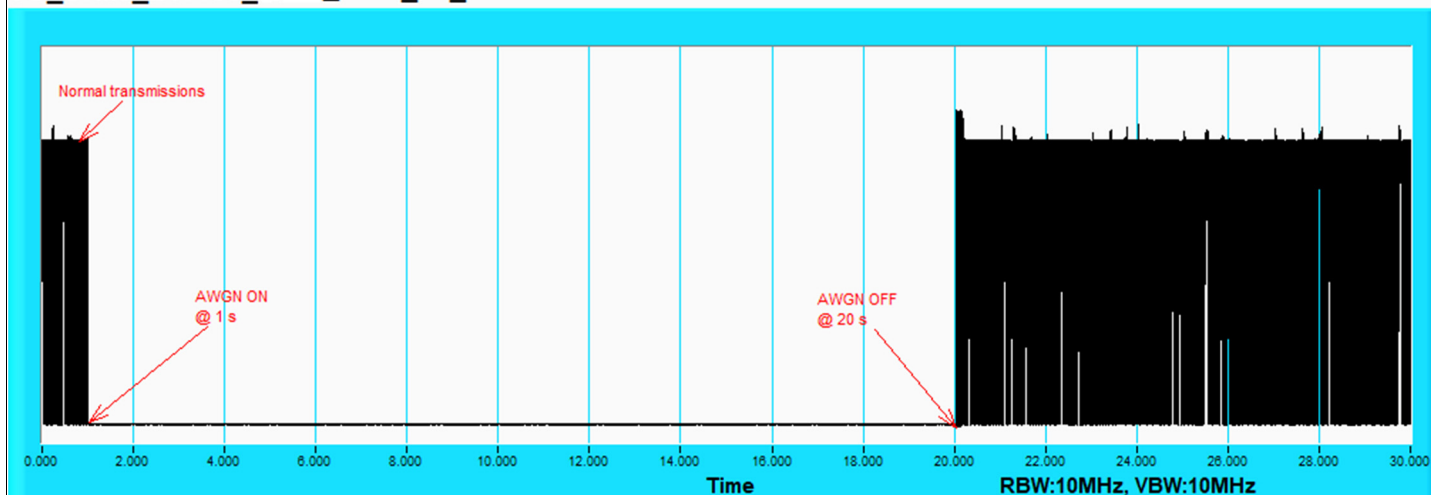

802.11be (EHT160) / CH47(Middle)

6G_UNII5_BW160_CH47_6260_a9_TRS

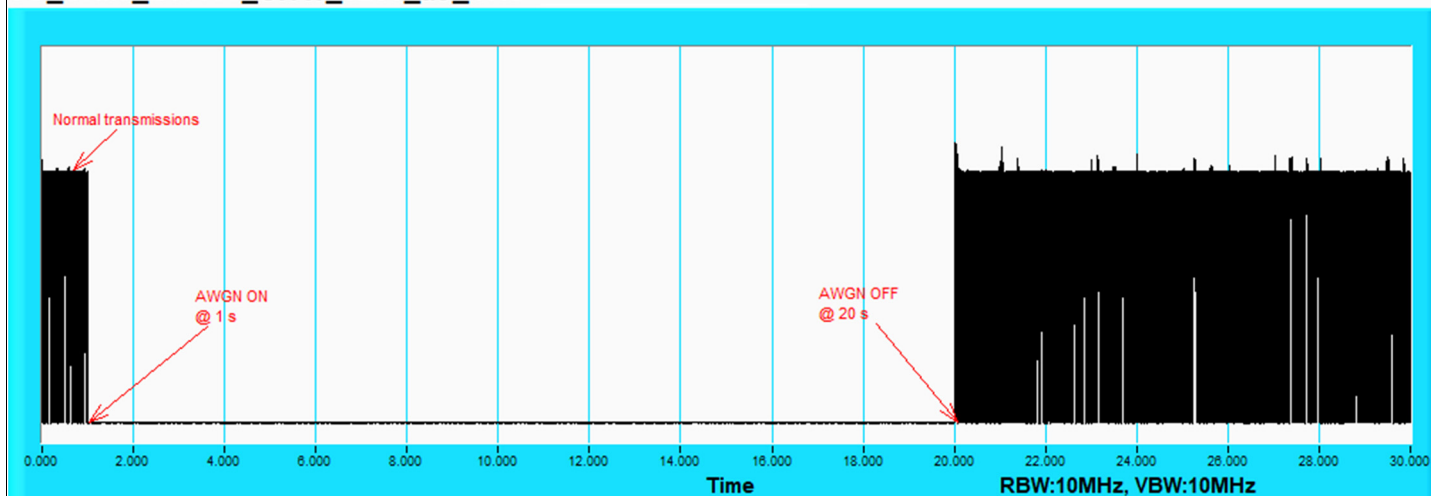

802.11be (EHT160) / CH47(High Edge)

Contention Based Protocol Measurement

Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	101	6455	6455	-84.34	-14.46	0	-69.88	-62	OFF
					-84.84	-14.46	0	-70.38	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
	160	111	6430	6430	-85.76	-14.46	0	-71.3	-62	OFF
					-86.26	-14.46	0	-71.8	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
			6505	6505	-83.99	-14.46	0	-69.53	-62	OFF
					-84.49	-14.46	0	-70.03	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
			6580	6580	-85.31	-14.46	0	-70.85	-62	OFF
					-85.81	-14.46	0	-71.35	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing mechanism for incumbent avoidance, but instead employs the bandwidth reduction mechanism to perform its function.


Contention Based Protocol Detection Probability

Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6455	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6430	v	v	v	x	v	v	v	v	v	v	90%	90%	Pass
		6505	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6580	v	x	v	v	v	v	v	v	v	v	90%	90%	Pass


Plots of EUT Tx waveform

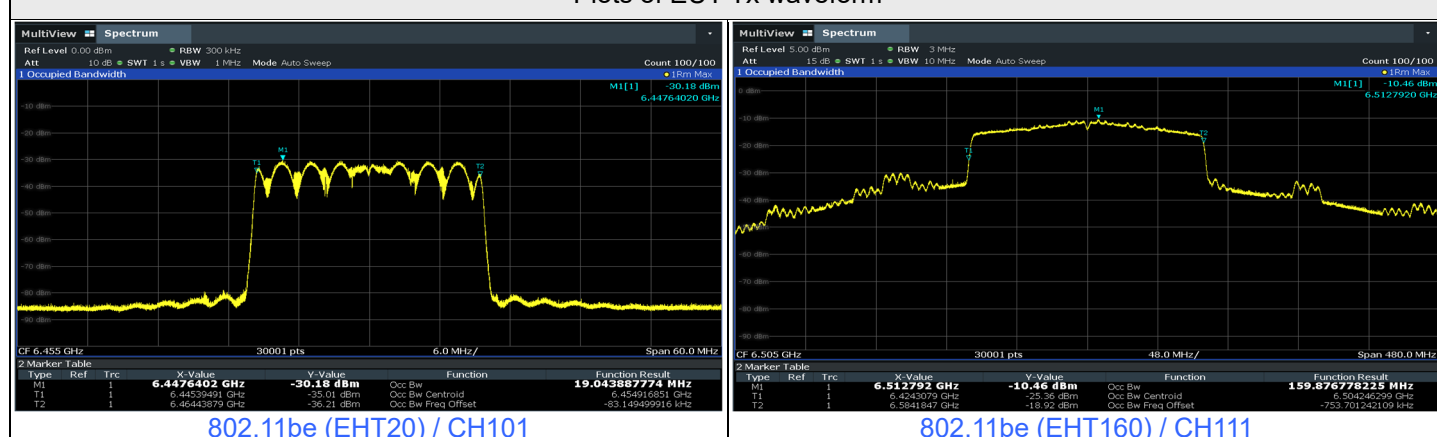


Plots of Injected signal (AWGN) level

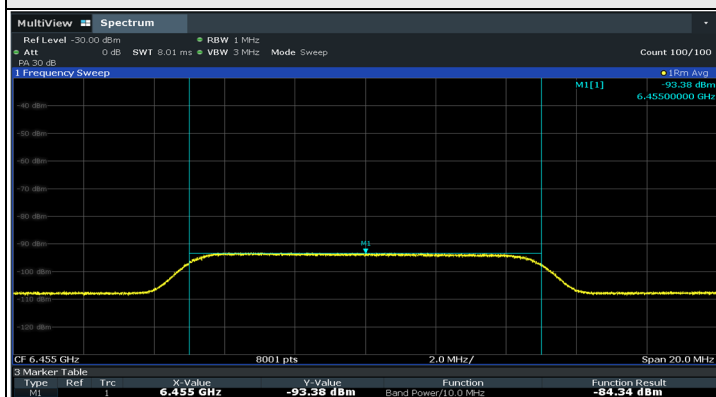


802.11be (EHT20) / CH101

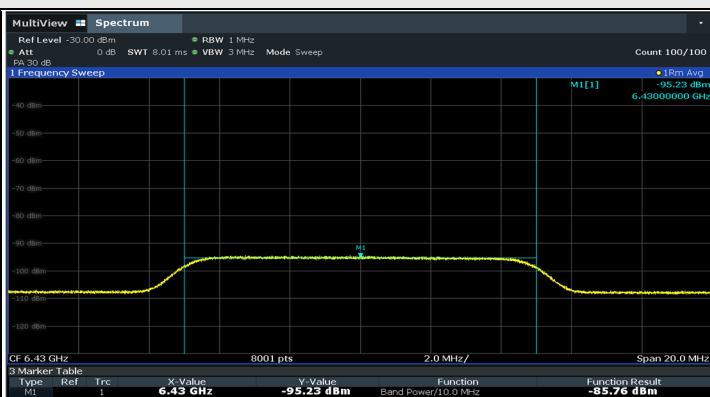

802.11be (EHT160) / CH111(Low Edge)

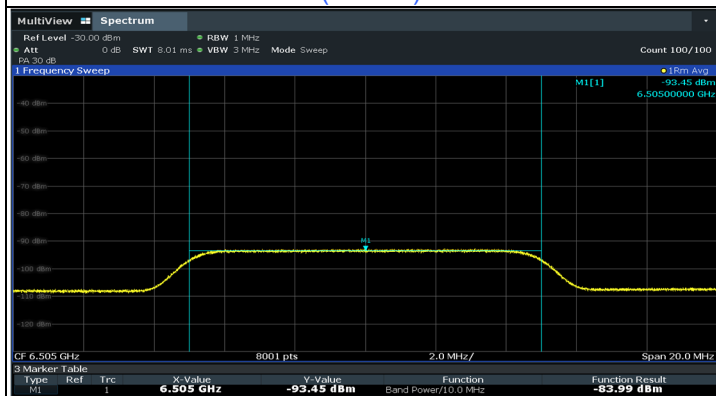


802.11be (EHT160) / CH111(Middle)

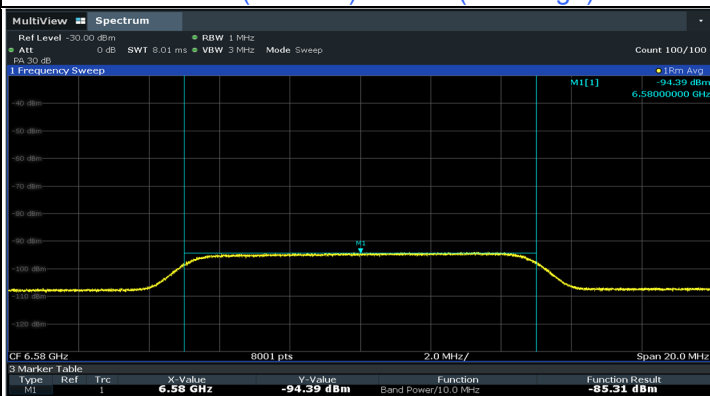

802.11be (EHT160) / CH111(High Edge)

Plots of EUT ceased transmission in the time domain


6G_UNII6_6455_a5_TRS

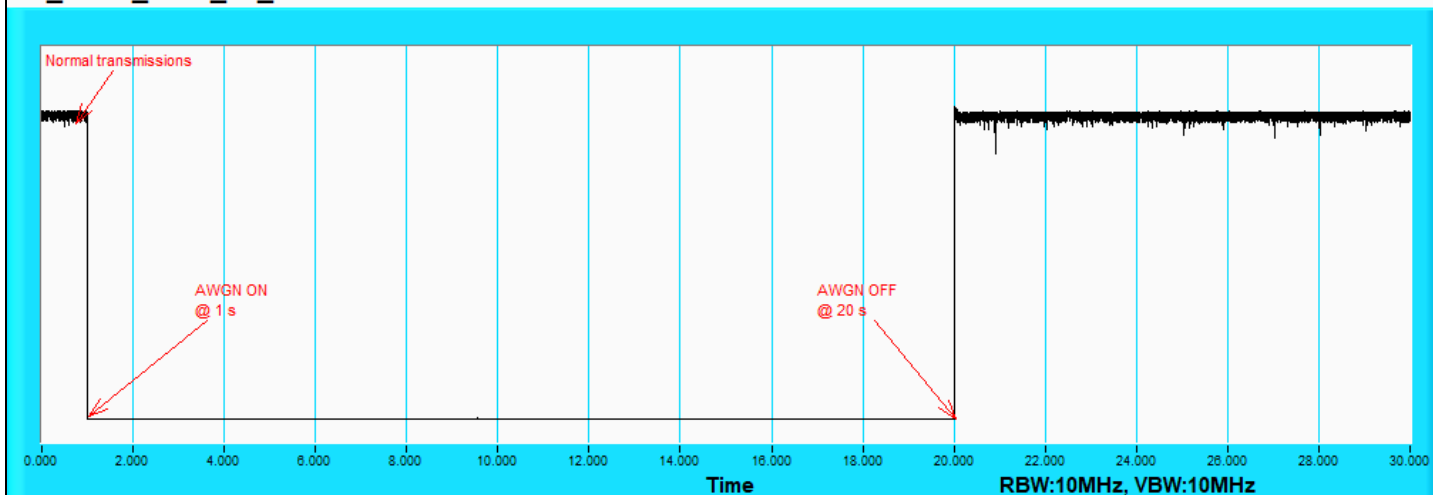

802.11be (EHT20) / CH101


Plots of EUT ceased transmission in the time domain

6G_UNII6_BW160_CH111_6430_aa_TRS

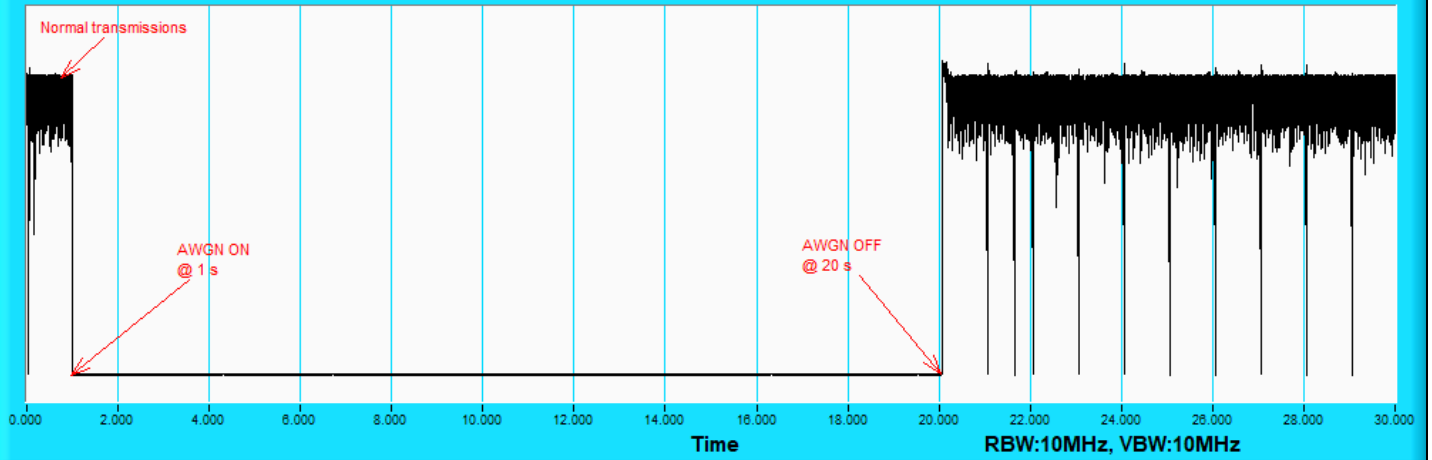


802.11be (EHT160) / CH111(Low Edge)

6G_UNII6_BW160_CH111_6505_aa_TRS

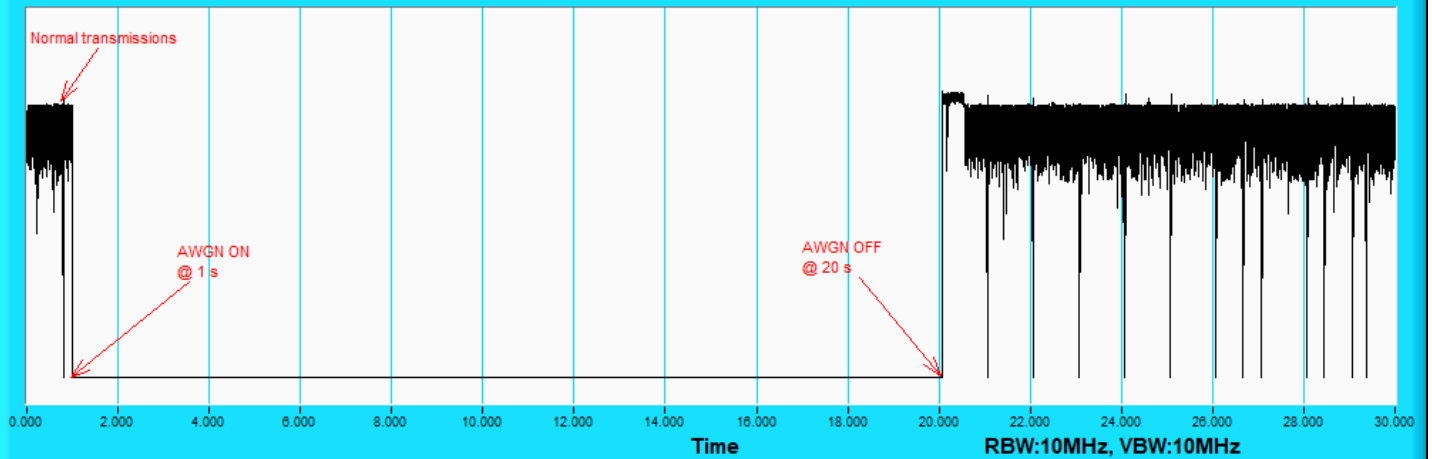

802.11be (EHT160) / CH111(Middle)

6G_UNII6_BW160_CH111_6580_aa_TRS

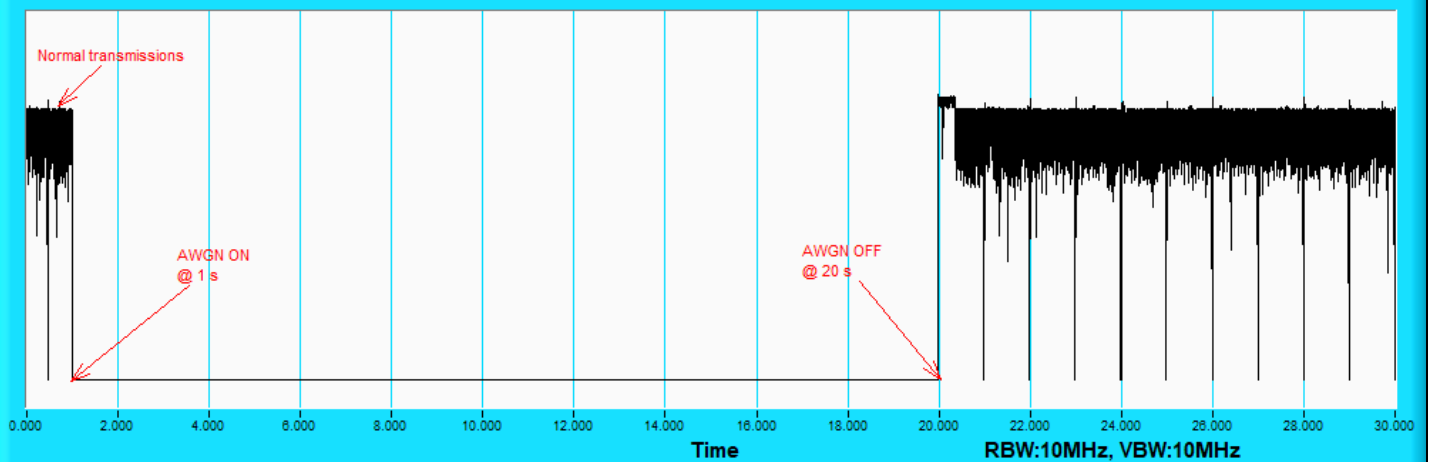

802.11be (EHT160) / CH111(High Edge)

For U-NII-7

Contention Based Protocol Measurement

Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	133	6615	6615	-83.85	-14.46	0	-69.39	-62	OFF
					-84.35	-14.46	0	-69.89	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
	160	143	6590	6590	-86.11	-14.46	0	-71.65	-62	OFF
					-86.61	-14.46	0	-72.15	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
			6665	6665	-85.44	-14.46	0	-70.98	-62	OFF
					-85.94	-14.46	0	-71.48	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
			6740	6740	-86.45	-14.46	0	-71.99	-62	OFF
					-86.95	-14.46	0	-72.49	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing mechanism for incumbent avoidance, but instead employs the bandwidth reduction mechanism to perform its function.


Contention Based Protocol Detection Probability

Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6615	x	v	v	v	v	v	v	v	v	v	90%	90%	Pass
	160	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6665	v	v	v	x	v	v	v	v	v	v	90%	90%	Pass
		6740	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

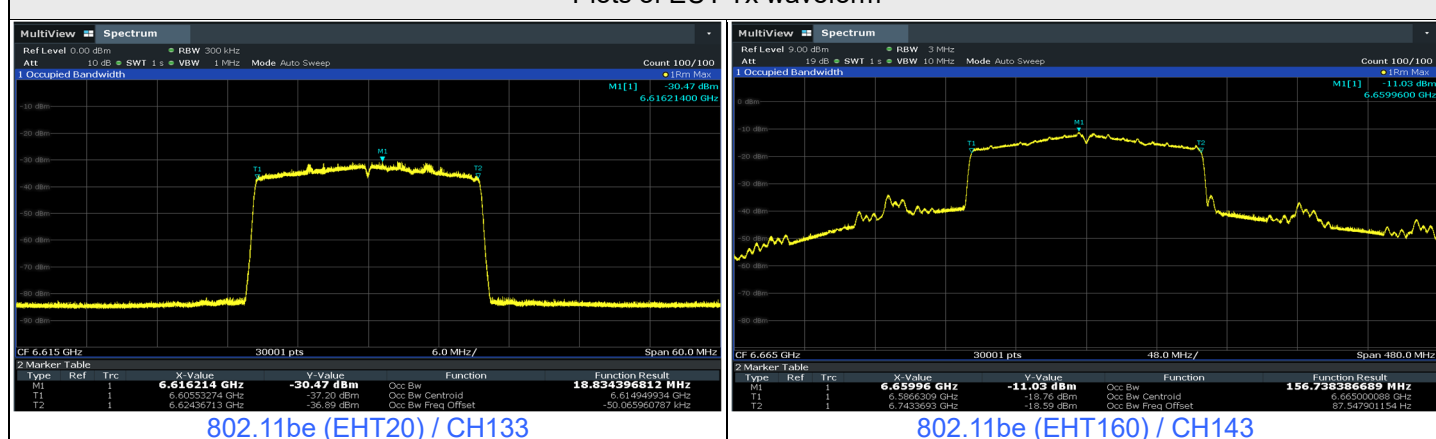


Plots of Injected signal (AWGN) level

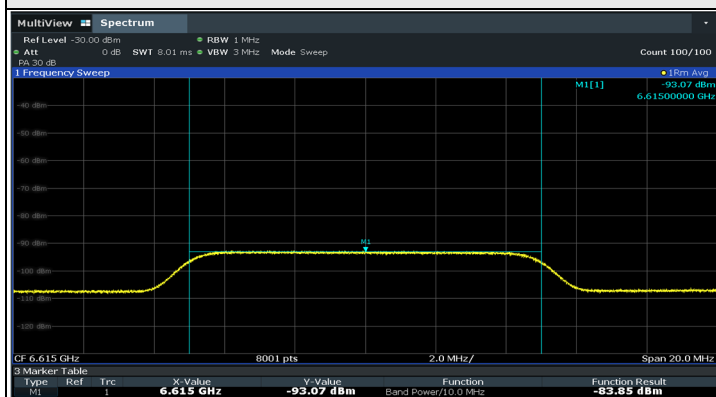


802.11be (EHT20) / CH133

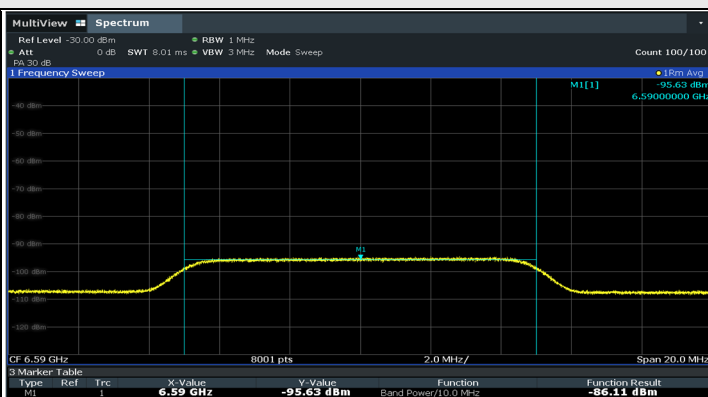

802.11be (EHT160) / CH143(Low Edge)

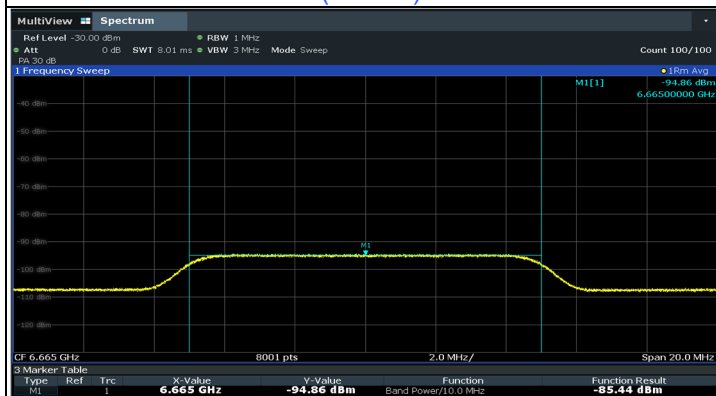


802.11be (EHT160) / CH143(Middle)

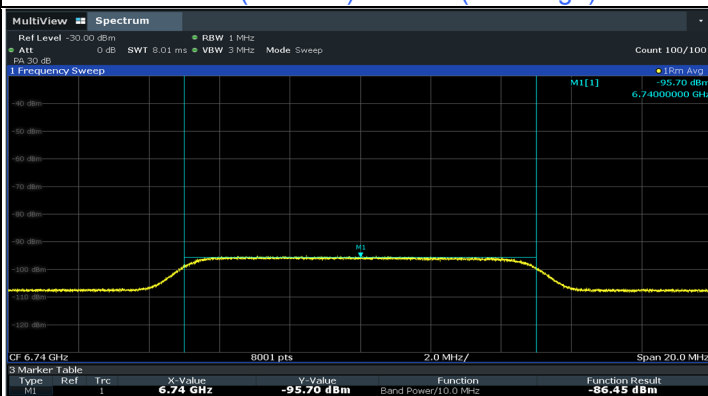

802.11be (EHT160) / CH143(High Edge)

Plots of EUT ceased transmission in the time domain


6G_UNI17_6615_a4_TRS

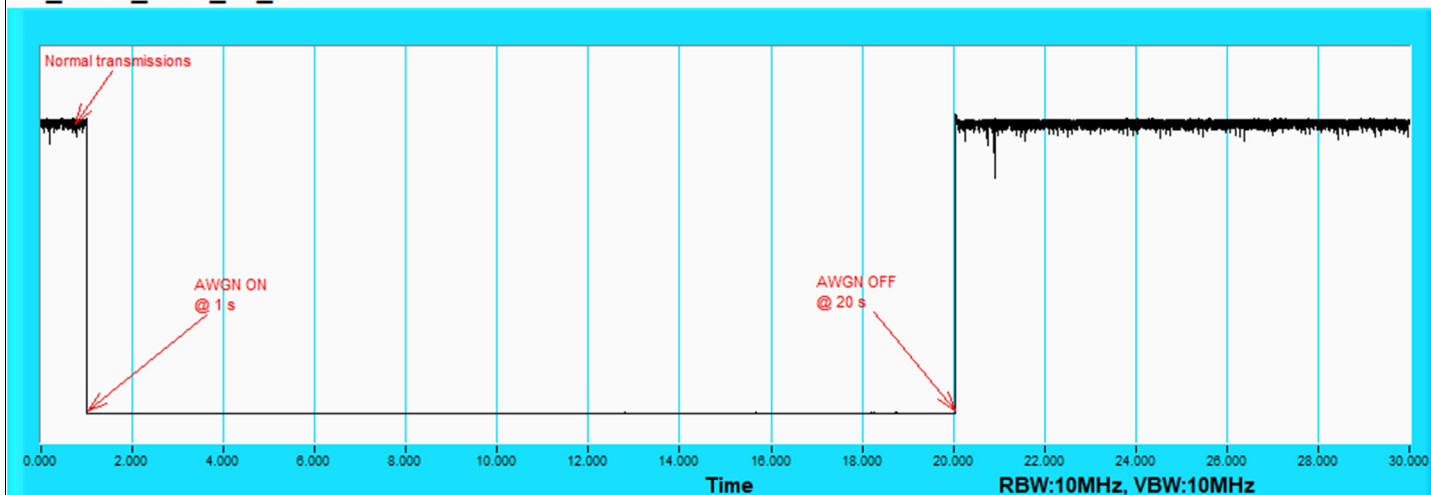

802.11be (EHT20) / CH133


Plots of EUT ceased transmission in the time domain

6G_UNII7_BW160_CH143_6590_aa_TRS

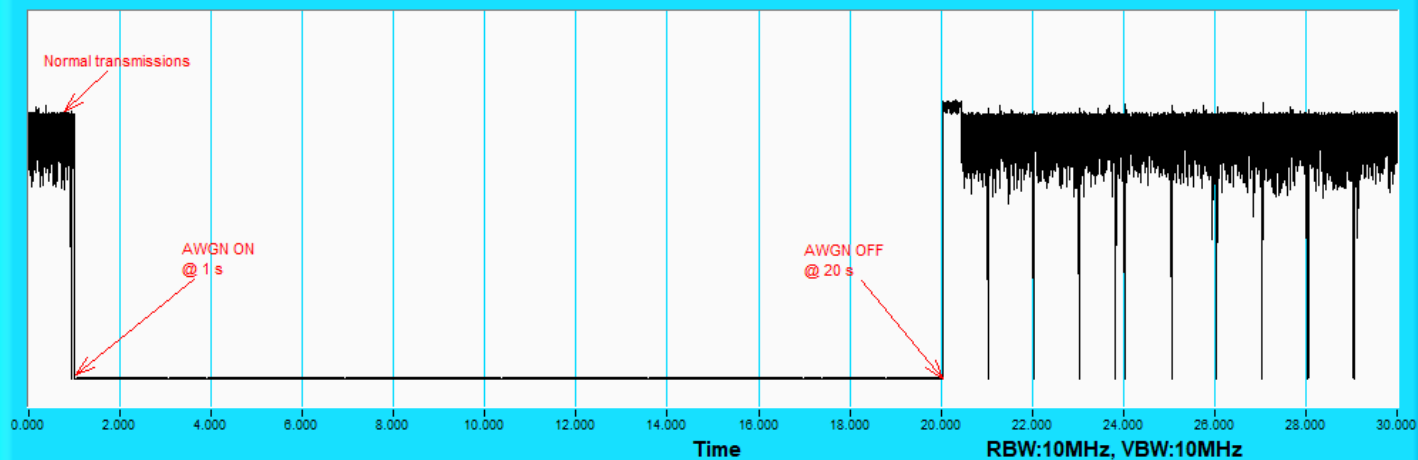


802.11be (EHT160) / CH143(Low Edge)

6G_UNII7_BW160_CH143_6665_aa_TRS

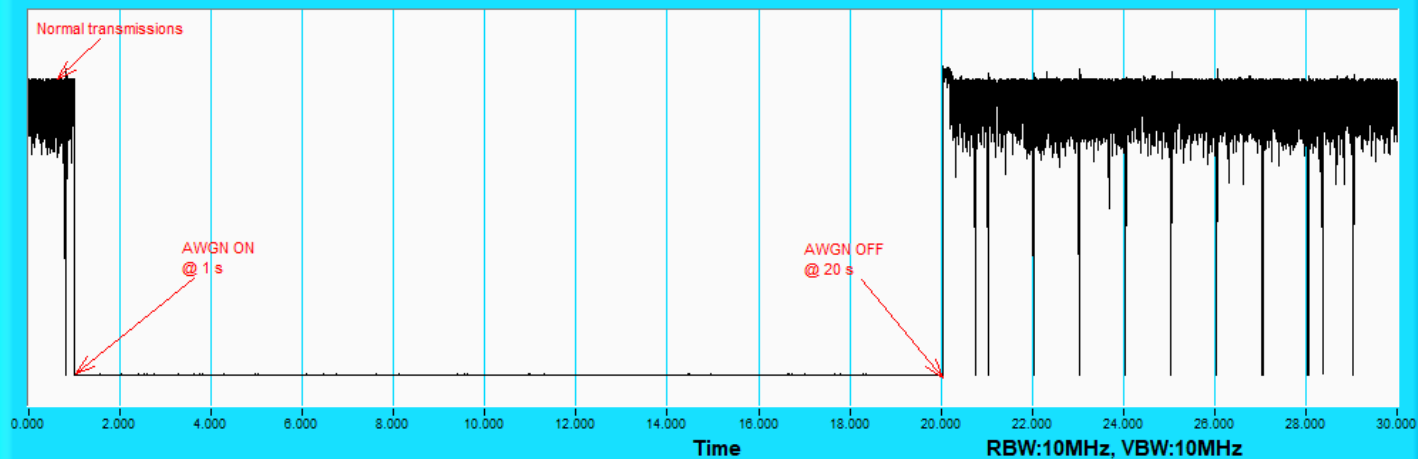

802.11be (EHT160) / CH143(Middle)

6G_UNII7_BW160_CH143_6740_aa_TRS

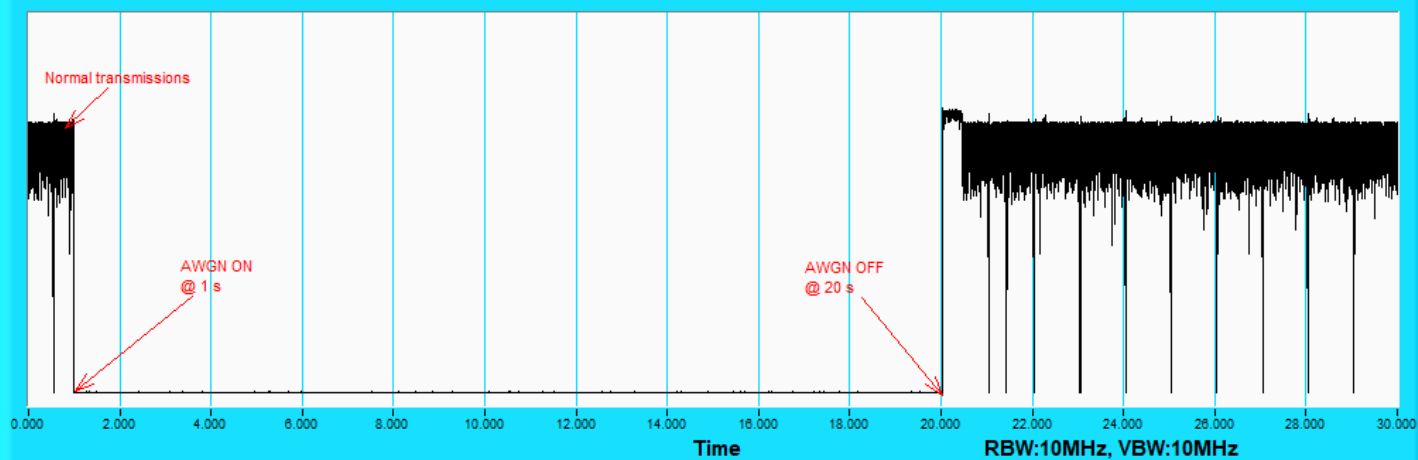


802.11be (EHT160) / CH143(High Edge)

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	197	6935	6935	-83.61	-14.46	0	-69.15	-62	OFF
					-84.11	-14.46	0	-69.65	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
	160	207	6910	6910	-87.21	-14.46	0	-72.75	-62	OFF
					-87.71	-14.46	0	-73.25	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
			6985	6985	-86.85	-14.46	0	-72.39	-62	OFF
					-87.35	-14.46	0	-72.89	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
			7060	7060	-87.85	-14.46	0	-73.39	-62	OFF
					-88.35	-14.46	0	-73.89	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing mechanism for incumbent avoidance, but instead employs the bandwidth reduction mechanism to perform its function.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6935	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6910	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6985	v	v	v	v	v	x	v	v	v	v	90%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

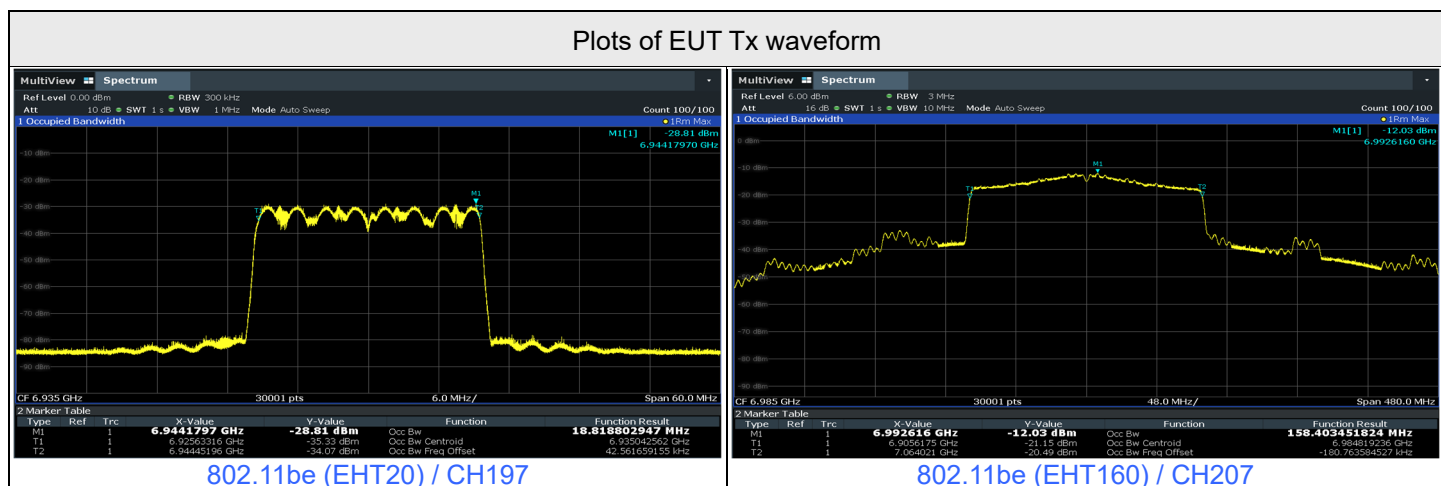


Plots of Injected signal (AWGN) level

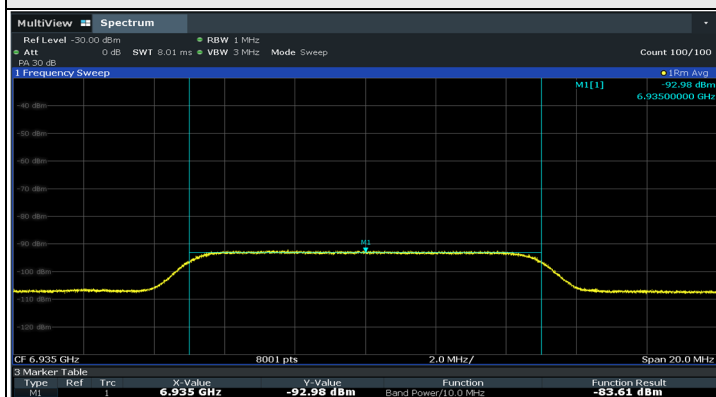


802.11be (EHT20) / CH197

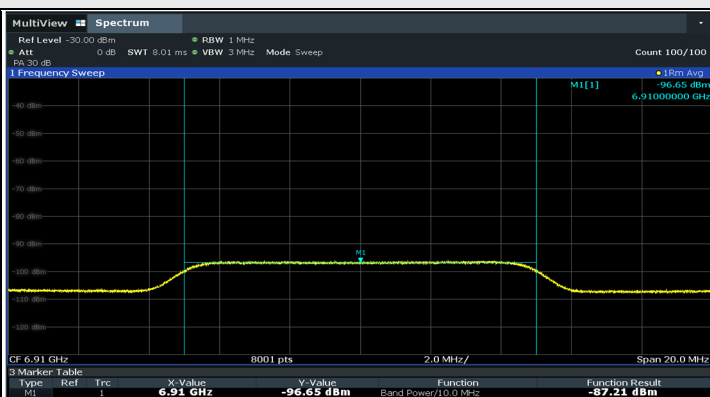

802.11be (EHT160) / CH207(Low Edge)

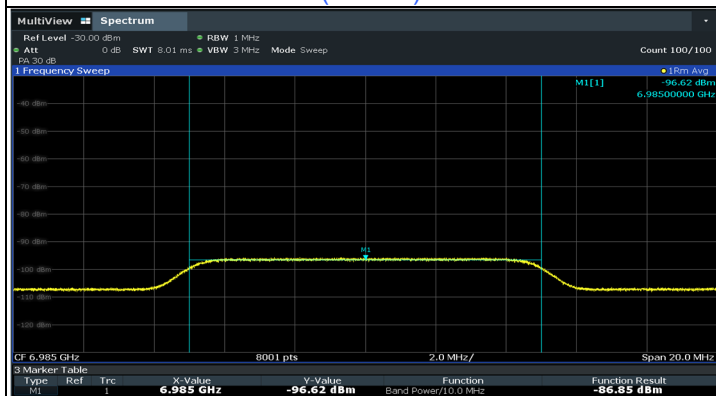


802.11be (EHT160) / CH207(Middle)

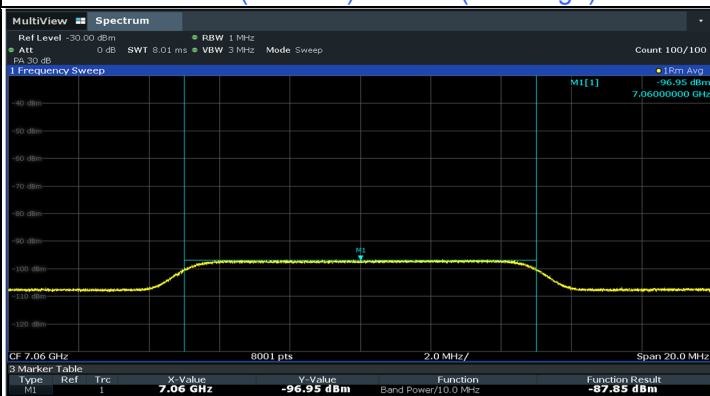

802.11be (EHT160) / CH207(High Edge)

Plots of EUT ceased transmission in the time domain


6G_UNI18_6935_a4_TRS

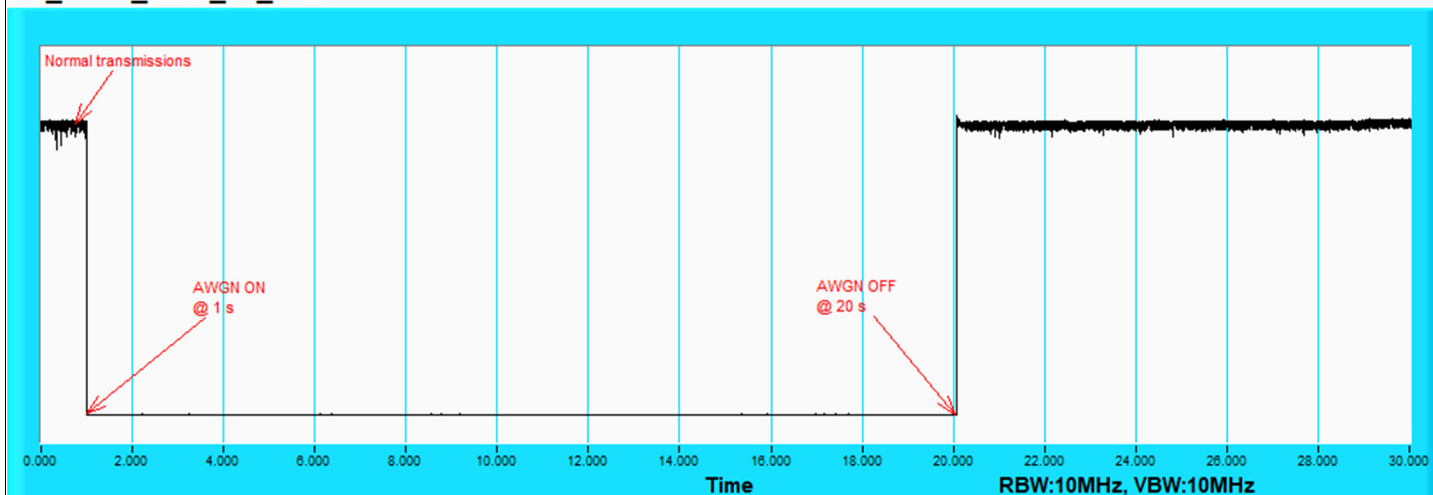

802.11be (EHT20) / CH197


Plots of EUT ceased transmission in the time domain

6G_UNII8_BW160_CH207_6910_a9_TRS

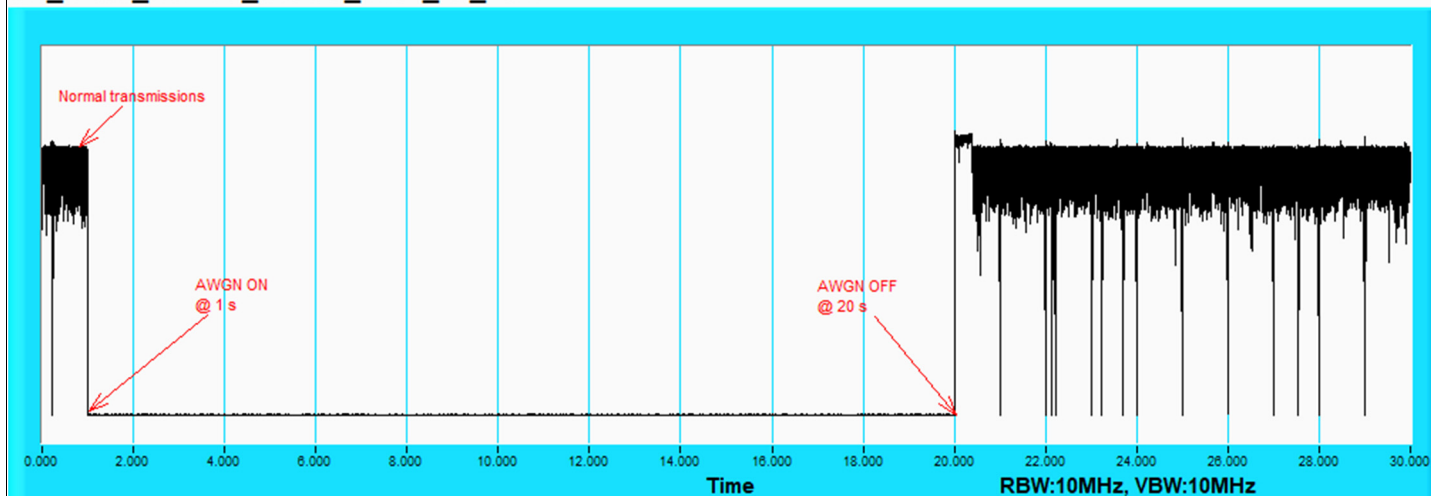


802.11be (EHT160) / CH207(Low Edge)

6G_UNII8_BW160_CH207_6985_a9_TRS

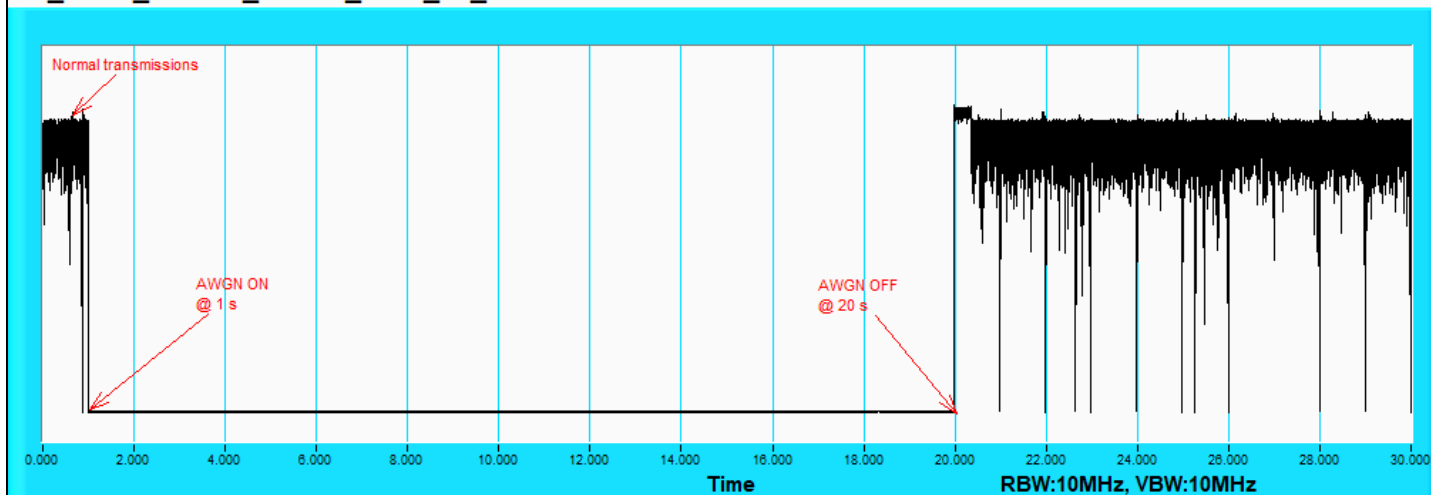

802.11be (EHT160) / CH207(Middle)


6G_UNII8_BW160_CH207_7060_a9_TRS

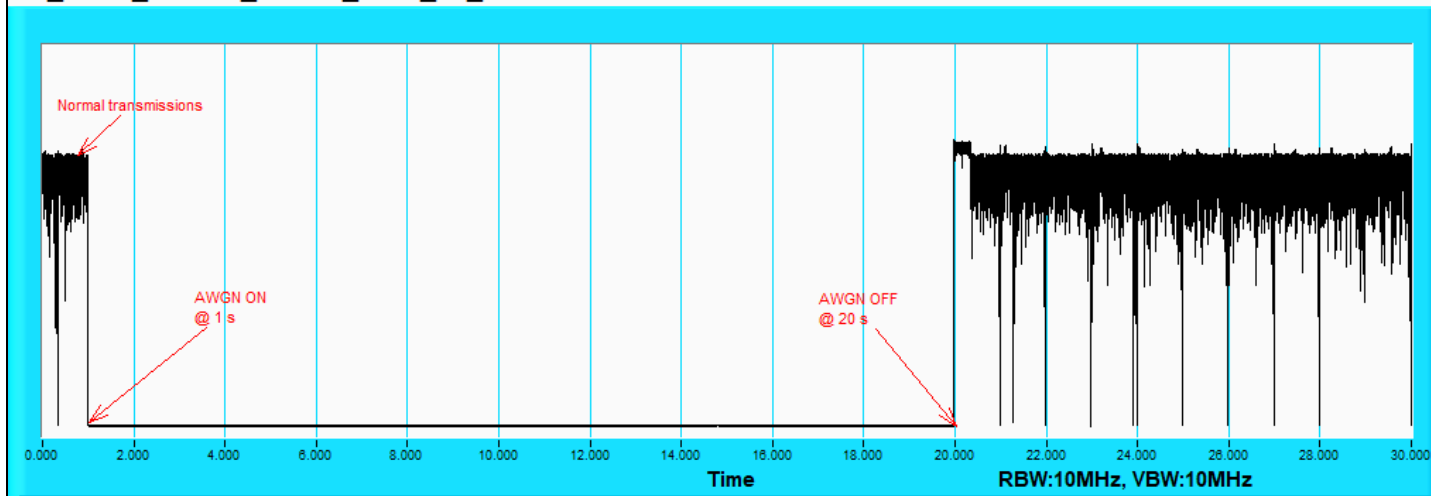

802.11be (EHT160) / CH207(High Edge)

Verify bandwidth reduction

Plots of EUT ceased transmission in the frequency domain

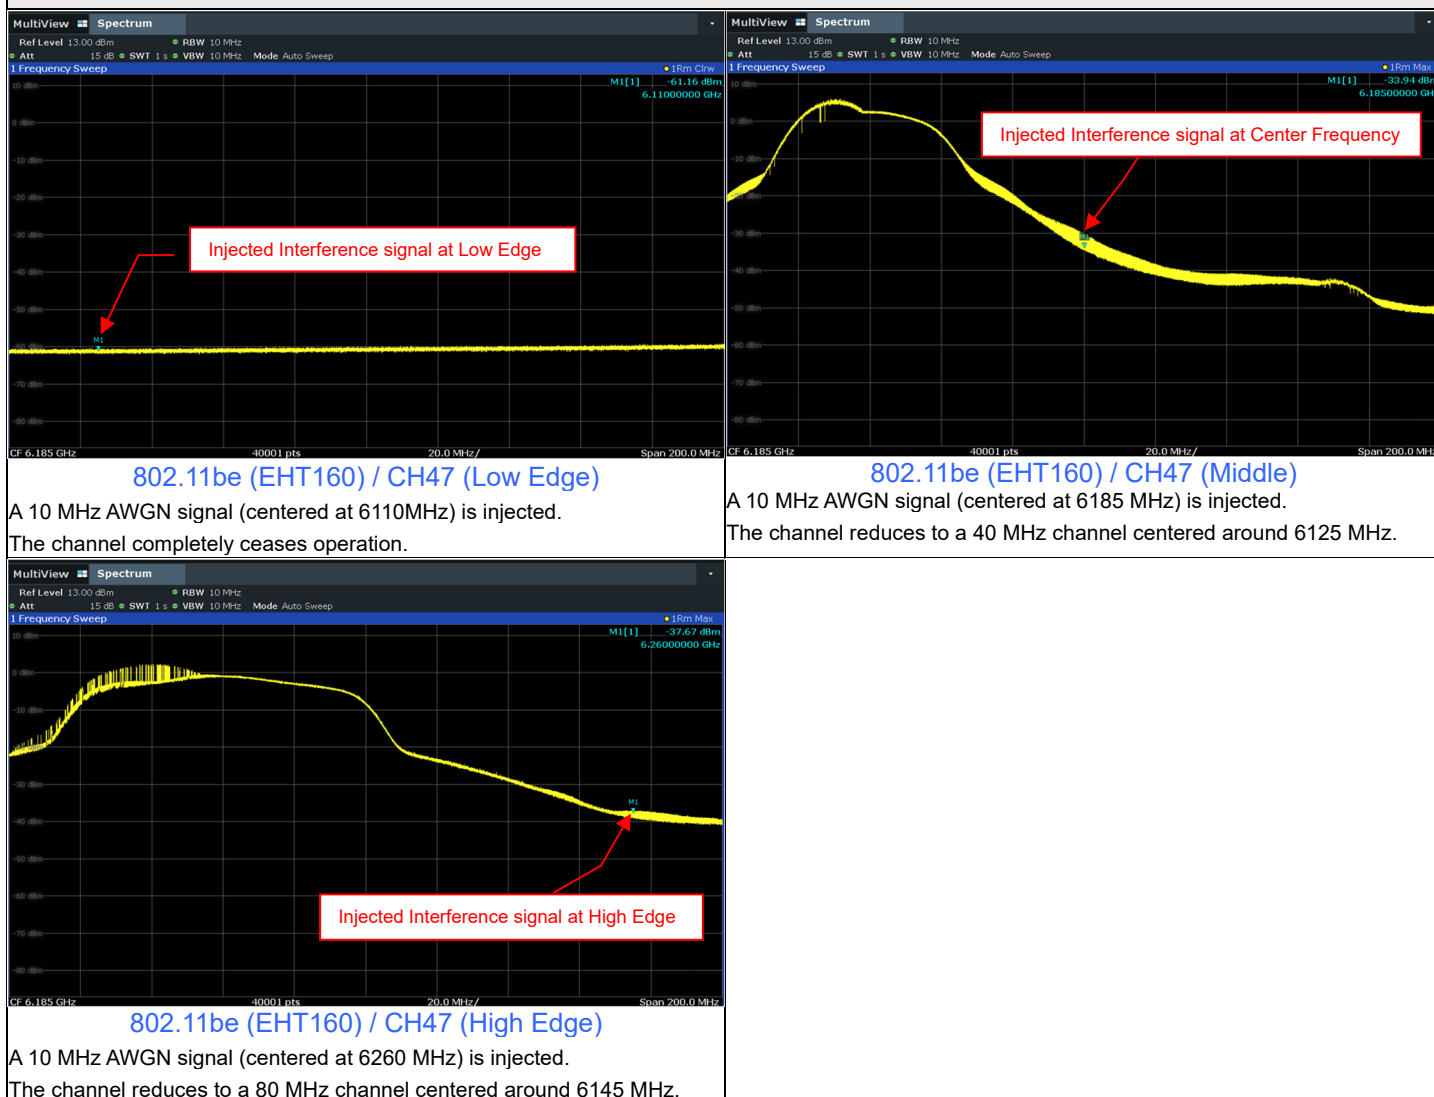

7.7 AC Power Conducted Emissions

Mode C


1S1T

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.96	32.79	17.12	42.75	27.08	65.38	55.38	-22.63	-28.30
2	0.19297	9.99	33.85	22.38	43.84	32.37	63.91	53.91	-20.07	-21.54
3	0.50547	10.00	25.00	16.55	35.00	26.55	56.00	46.00	-21.00	-19.45
4	2.42578	10.10	22.79	15.38	32.89	25.48	56.00	46.00	-23.11	-20.52
5	5.02734	10.23	20.12	13.53	30.35	23.76	60.00	50.00	-29.65	-26.24
6	10.60938	10.49	22.11	16.43	32.60	26.92	60.00	50.00	-27.40	-23.08

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

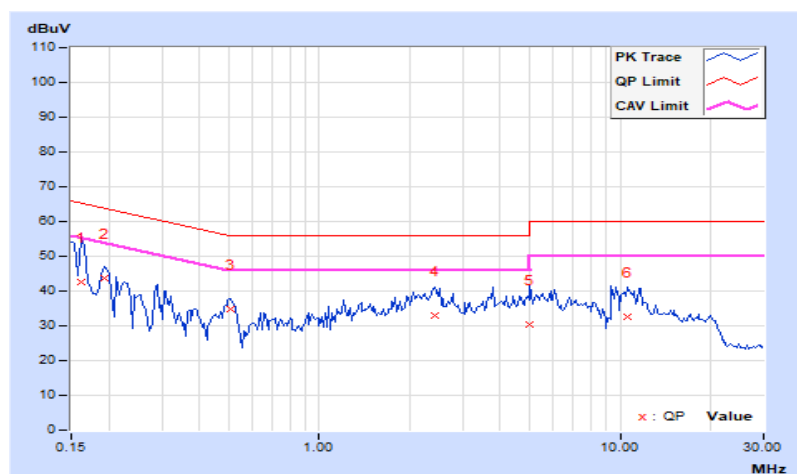


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.01	37.80	14.98	47.81	24.99	65.79	55.79	-17.98	-30.80
2	0.47422	10.01	23.74	13.14	33.75	23.15	56.44	46.44	-22.69	-23.29
3	0.58750	10.02	21.15	10.03	31.17	20.05	56.00	46.00	-24.83	-25.95
4	2.16016	10.11	21.46	13.61	31.57	23.72	56.00	46.00	-24.43	-22.28
5	5.45313	10.23	16.92	10.20	27.15	20.43	60.00	50.00	-32.85	-29.57
6	10.51563	10.43	21.01	14.99	31.44	25.42	60.00	50.00	-28.56	-24.58

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

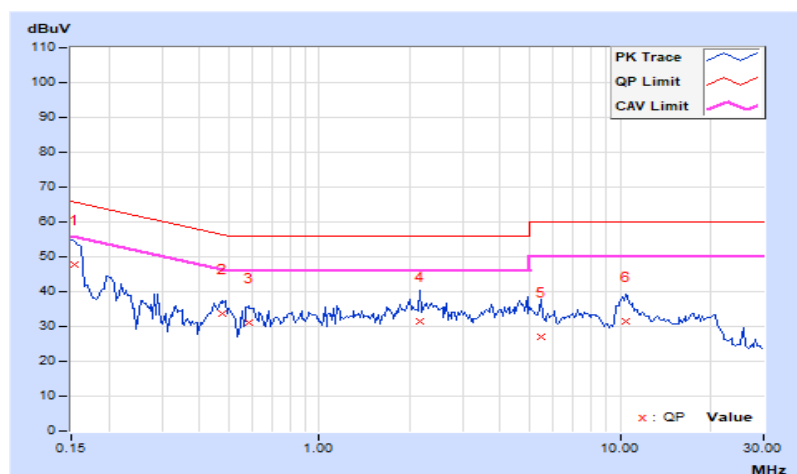


2S2T

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.96	32.79	17.12	42.75	27.08	65.38	55.38	-22.63	-28.30
2	0.19297	9.99	33.85	22.38	43.84	32.37	63.91	53.91	-20.07	-21.54
3	0.50547	10.00	25.00	16.55	35.00	26.55	56.00	46.00	-21.00	-19.45
4	2.42578	10.10	22.79	15.38	32.89	25.48	56.00	46.00	-23.11	-20.52
5	5.02734	10.23	20.12	13.53	30.35	23.76	60.00	50.00	-29.65	-26.24
6	10.60938	10.49	22.11	16.43	32.60	26.92	60.00	50.00	-27.40	-23.08

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

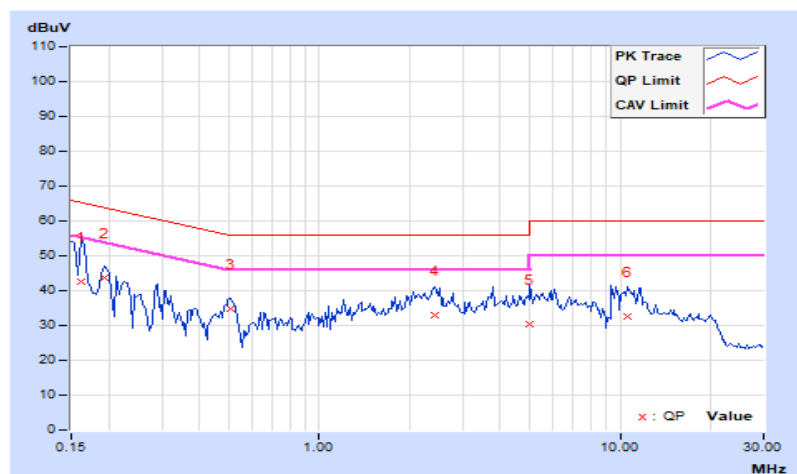


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.01	37.80	14.98	47.81	24.99	65.79	55.79	-17.98	-30.80
2	0.47422	10.01	23.74	13.14	33.75	23.15	56.44	46.44	-22.69	-23.29
3	0.58750	10.02	21.15	10.03	31.17	20.05	56.00	46.00	-24.83	-25.95
4	2.16016	10.11	21.46	13.61	31.57	23.72	56.00	46.00	-24.43	-22.28
5	5.45313	10.23	16.92	10.20	27.15	20.43	60.00	50.00	-32.85	-29.57
6	10.51563	10.43	21.01	14.99	31.44	25.42	60.00	50.00	-28.56	-24.58

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

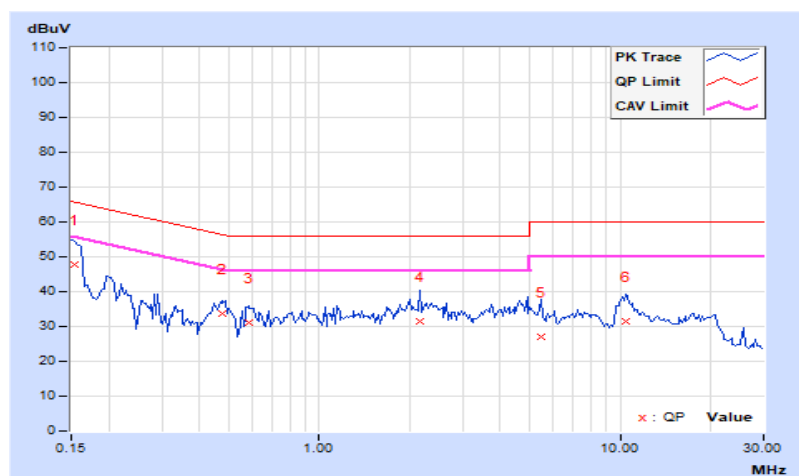

7.8 Unwanted Emissions below 1 GHz

Mode A


1S1T

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	30.24	24.68 PK	40	-15.32	-80.2	9.62	-70.58
2	186.53	23.15 PK	43.5	-20.35	-81.73	9.62	-72.11
3	268.86	23.94 PK	46	-22.06	-80.94	9.62	-71.32
4	423.33	24.14 PK	46	-21.86	-80.74	9.62	-71.12
5	636.01	23.99 PK	46	-22.01	-80.89	9.62	-71.27
6	985.21	25.99 PK	54	-28.01	-78.89	9.62	-69.27

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

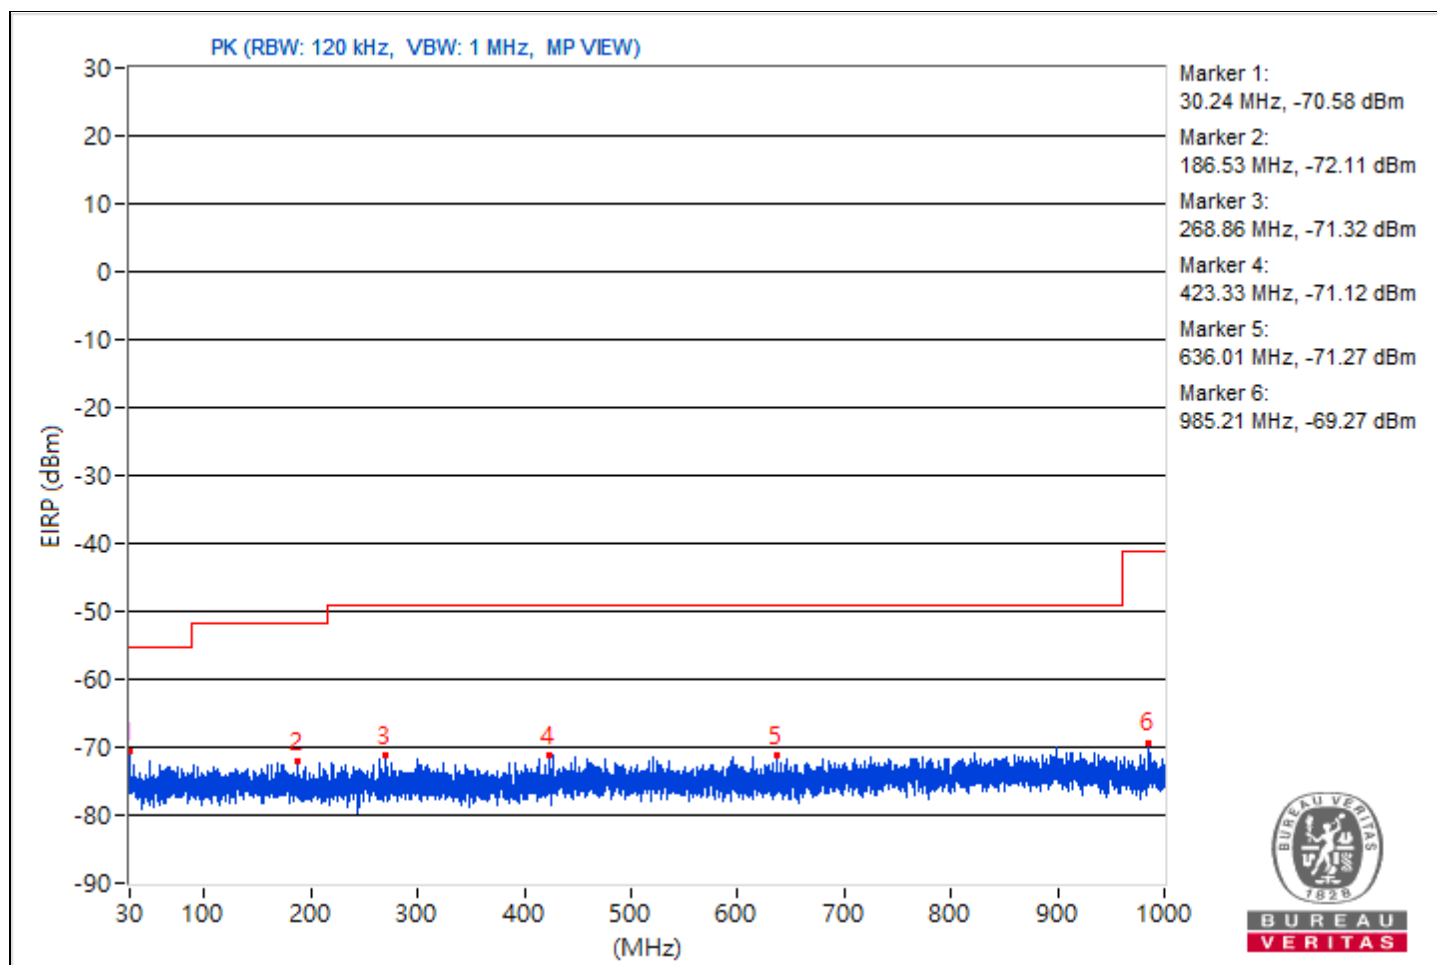


2S2T

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	86.62	25.19 PK	40	-14.81	-81.17	-85.07	9.62	-70.07
2	101.42	26.68 PK	43.5	-16.82	-81.59	-80.86	9.62	-68.58
3	383.81	26.44 PK	46	-19.56	-79.8	-84.14	9.62	-68.82
4	452.07	26.06 PK	46	-19.94	-83.69	-80.54	9.62	-69.2
5	736.04	26.85 PK	46	-19.15	-79.67	-83.03	9.62	-68.41
6	879.84	27.96 PK	46	-18.04	-79.11	-80.94	9.62	-67.3

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

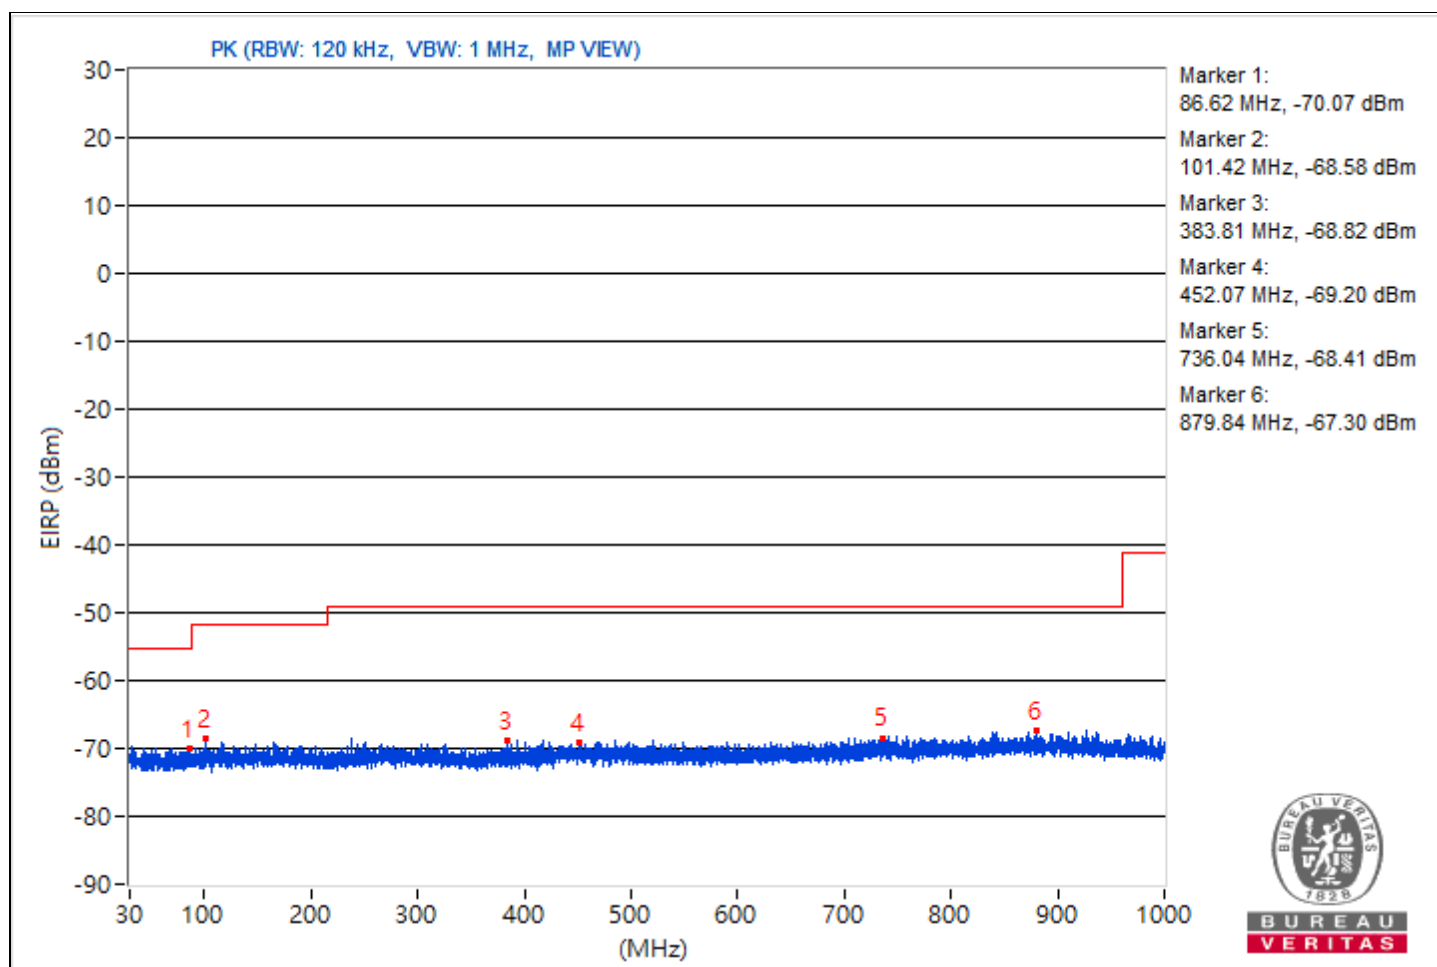

Mode B


1S1T

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.71	30.7 QP	40.0	-9.3	2.00 H	117	44.3	-13.6
2	99.91	35.1 QP	43.5	-8.4	2.00 H	302	52.3	-17.2
3	166.71	38.5 QP	43.5	-5.0	2.00 H	325	51.7	-13.2
4	199.57	42.2 QP	43.5	-1.3	2.00 H	321	58.4	-16.2
5	398.75	37.8 QP	46.0	-8.2	2.00 H	344	47.6	-9.8
6	698.21	42.6 QP	46.0	-3.4	1.00 H	295	46.0	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

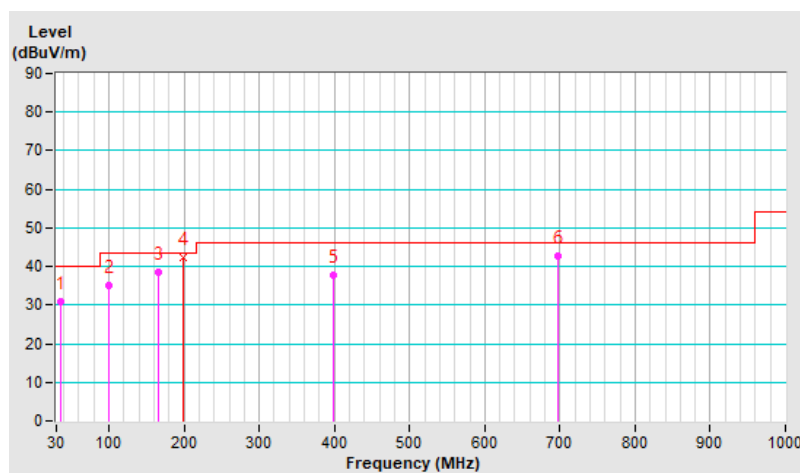


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.89	29.1 QP	40.0	-10.9	1.00 V	225	42.4	-13.3
2	166.51	30.9 QP	43.5	-12.6	3.00 V	72	44.1	-13.2
3	199.22	34.1 QP	43.5	-9.4	2.00 V	245	50.3	-16.2
4	298.21	37.4 QP	46.0	-8.6	1.00 V	215	49.8	-12.4
5	462.12	36.8 QP	46.0	-9.2	1.00 V	202	44.8	-8.0
6	798.12	37.4 QP	46.0	-8.6	2.00 V	292	38.8	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

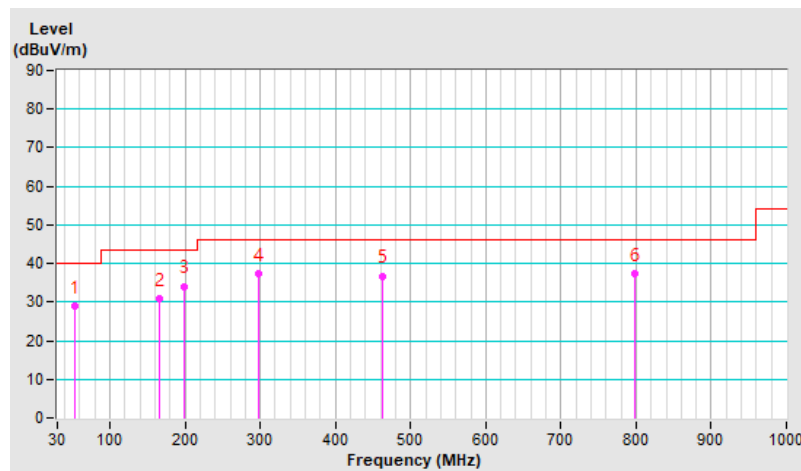


2S2T

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.29	30.5 QP	40.0	-9.5	3.00 H	130	44.1	-13.6
2	99.62	34.7 QP	43.5	-8.8	2.00 H	325	51.9	-17.2
3	166.28	38.0 QP	43.5	-5.5	2.00 H	349	51.2	-13.2
4	199.57	42.2 QP	43.5	-1.3	2.00 H	321	58.4	-16.2
5	398.31	37.3 QP	46.0	-8.7	2.00 H	360	47.2	-9.9
6	698.43	42.3 QP	46.0	-3.7	1.00 H	310	45.7	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

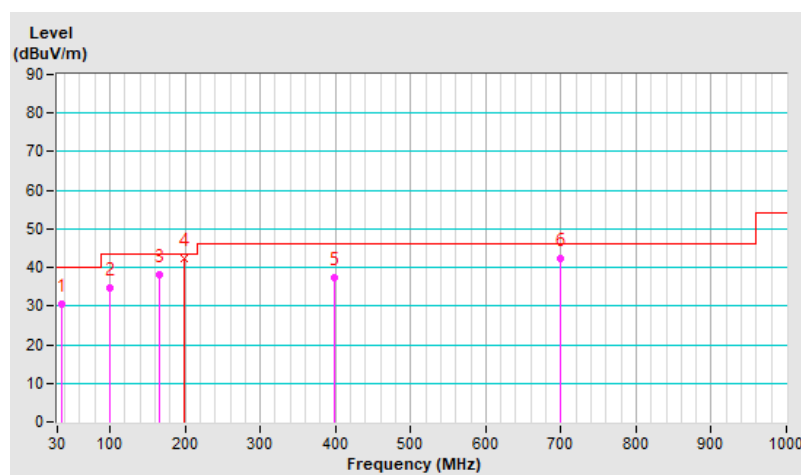


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.10	28.2 QP	40.0	-11.8	1.00 V	250	41.5	-13.3
2	166.26	30.7 QP	43.5	-12.8	3.00 V	61	43.9	-13.2
3	199.17	33.8 QP	43.5	-9.7	2.00 V	220	50.0	-16.2
4	298.74	37.1 QP	46.0	-8.9	2.00 V	205	49.5	-12.4
5	462.62	36.5 QP	46.0	-9.5	1.00 V	211	44.5	-8.0
6	798.22	37.1 QP	46.0	-8.9	2.00 V	360	38.5	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

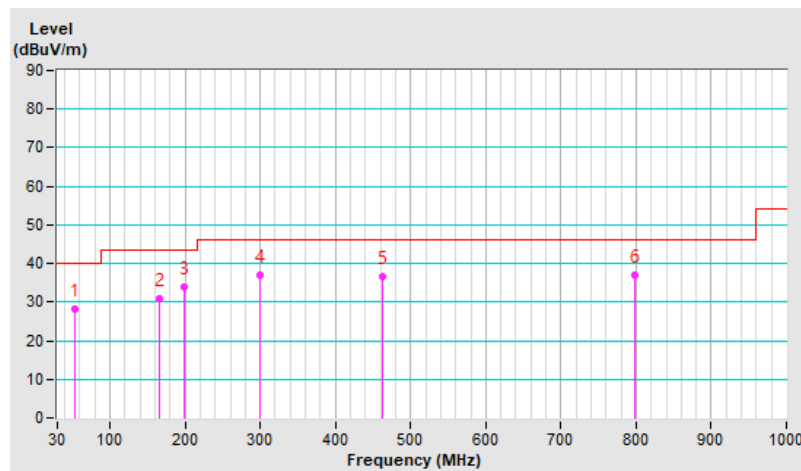

7.9 Unwanted Emissions above 1 GHz

Mode A



1TX

Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3818.59	44.31 PK	74	-29.69	-55.87	4.92	-50.95
2	3818.59	34.69 AV	54	-19.31	-65.49	4.92	-60.57
3	14493.96	40.01 PK	74	-33.99	-60.17	4.92	-55.25
4	14493.96	33.53 AV	54	-20.47	-66.65	4.92	-61.73
5	21378.8	41.43 PK	74	-32.57	-58.75	4.92	-53.83
6	21378.8	35.43 AV	54	-18.57	-64.75	4.92	-59.83
7	23620.6	42.32 PK	74	-31.68	-57.86	4.92	-52.94
8	23620.6	36.67 AV	54	-17.33	-63.51	4.92	-58.59
9	38896.36	37.44 PK	74	-36.56	-62.74	4.92	-57.82
10	38896.36	30.31 AV	54	-23.69	-69.87	4.92	-64.95

Note: Margin value = Emission Level - Limit value

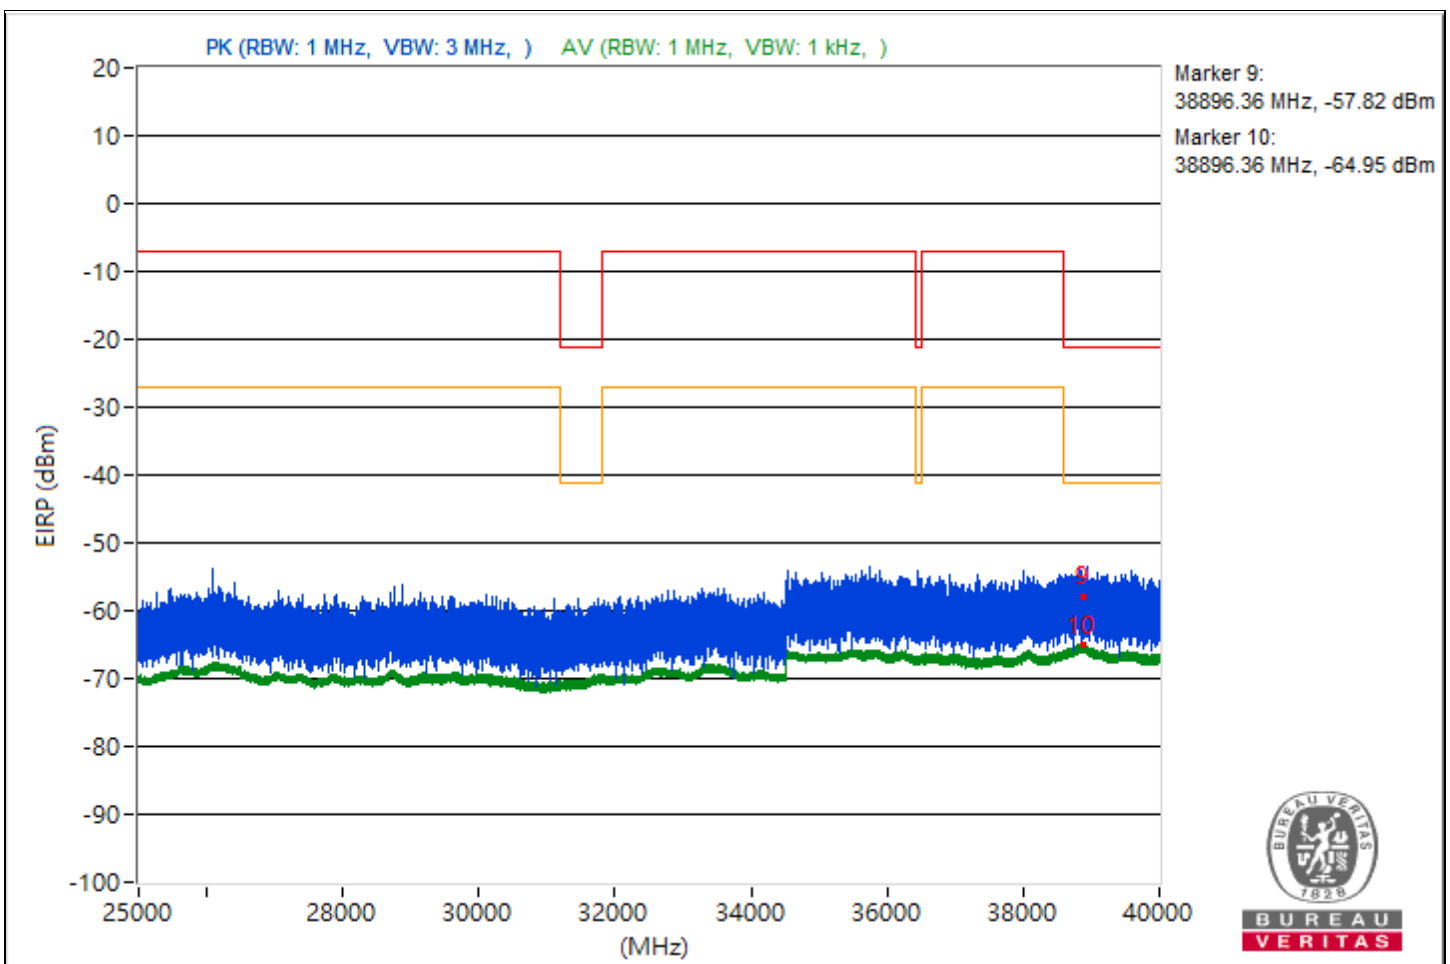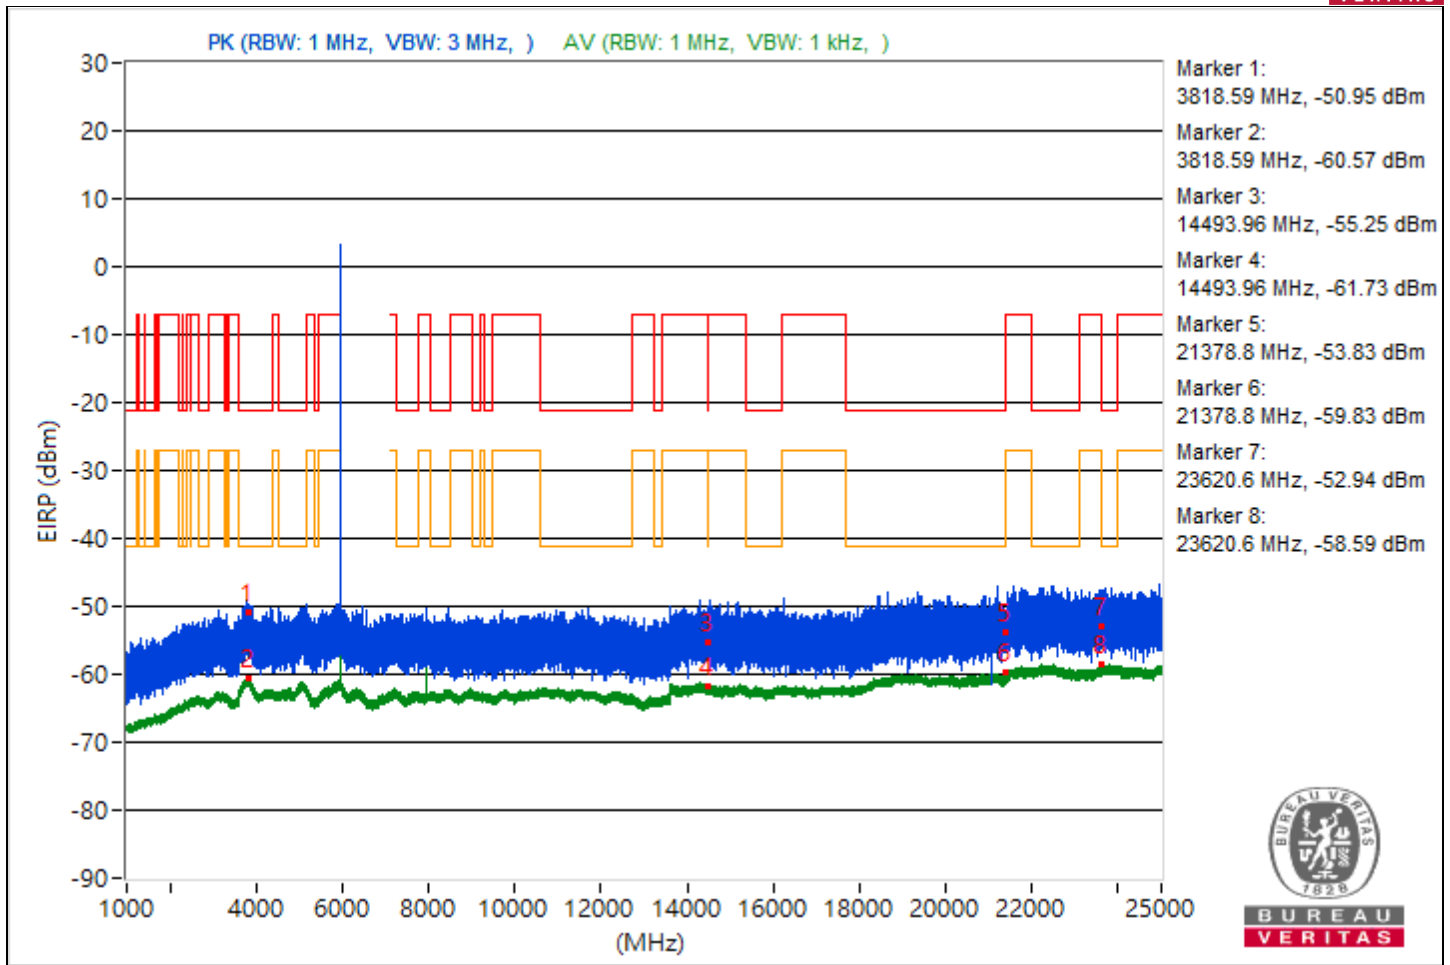



RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3843.48	41.23 PK	74	-32.77	-58.95	4.92	-54.03
2	3843.48	34.65 AV	54	-19.35	-65.53	4.92	-60.61
3	8233.16	40.41 PK	74	-33.59	-59.77	4.92	-54.85
4	8233.16	35.71 AV	54	-18.29	-64.47	4.92	-59.55
5	21394.9	42.78 PK	74	-31.22	-57.4	4.92	-52.48
6	21394.9	35.42 AV	54	-18.58	-64.76	4.92	-59.84
7	22330.5	43.39 PK	74	-30.61	-56.79	4.92	-51.87
8	22330.5	36.61 AV	54	-17.39	-63.57	4.92	-58.65
9	38806.49	39.01 PK	74	-34.99	-61.17	4.92	-56.25
10	38806.49	30.35 AV	54	-23.65	-69.83	4.92	-64.91

Note: Margin value = Emission Level - Limit value

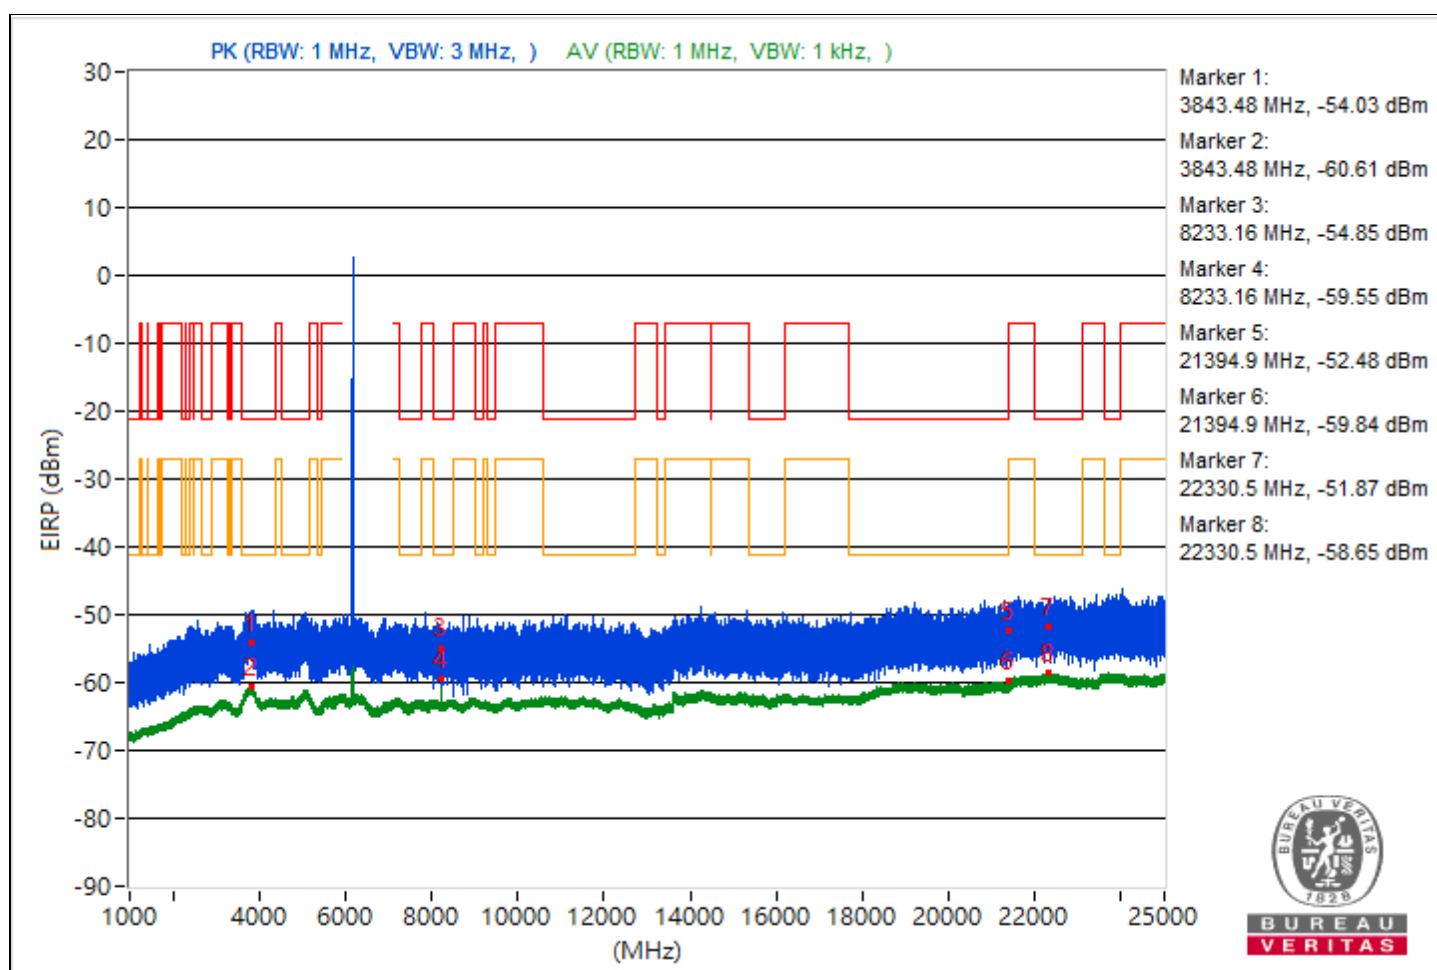


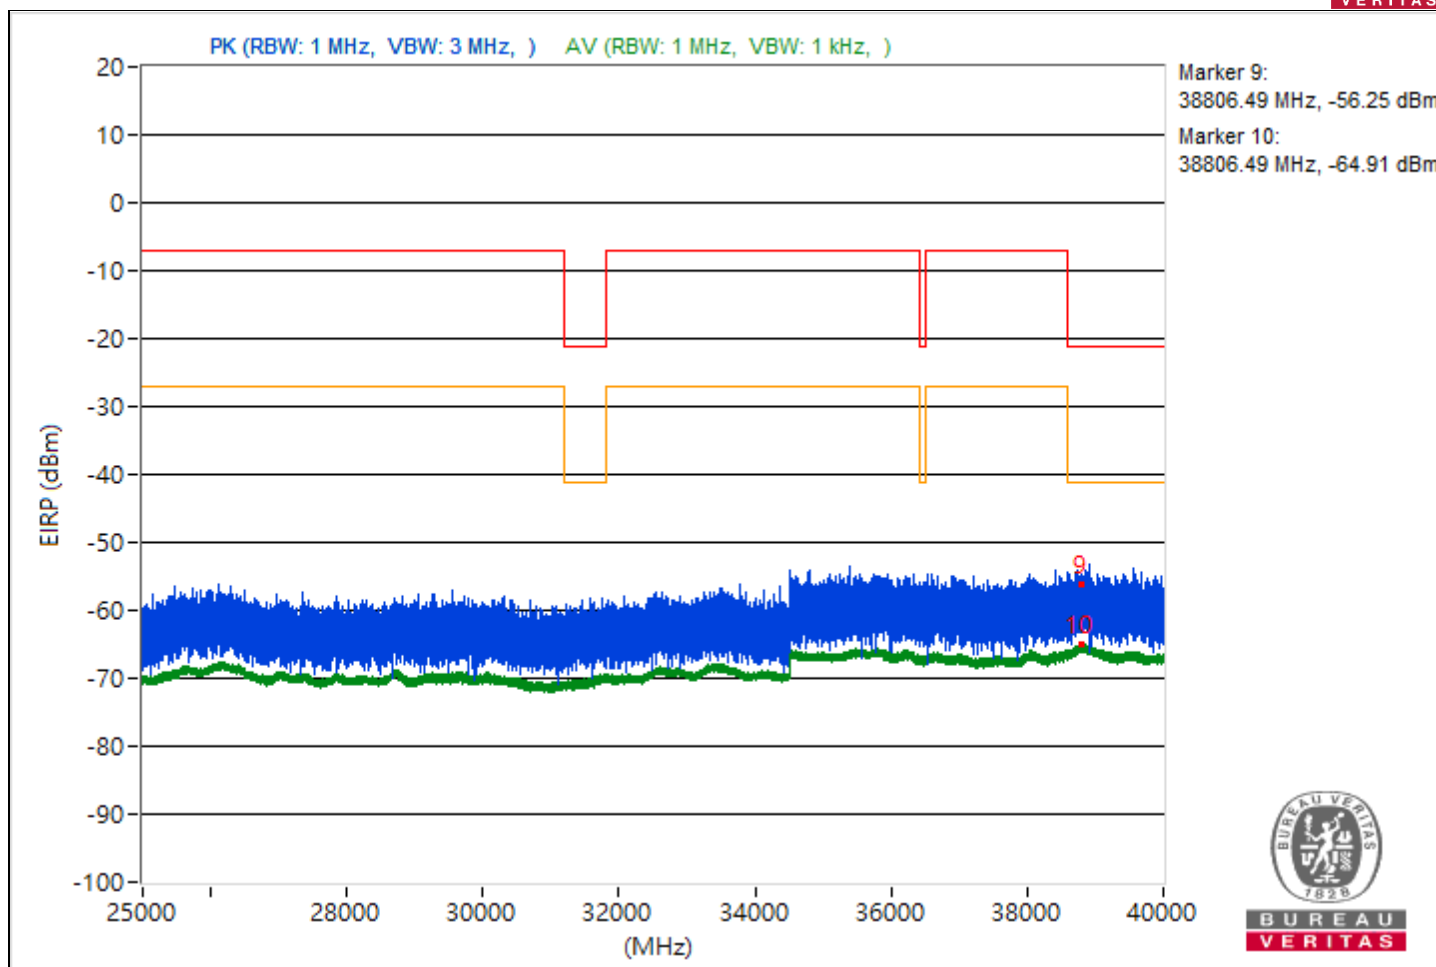


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.09	43 PK	74	-31	-57.18	4.92	-52.26
2	3801.09	34.56 AV	54	-19.44	-65.62	4.92	-60.7
3	14484.53	42.73 PK	74	-31.27	-57.45	4.92	-52.53
4	14484.53	33.71 AV	54	-20.29	-66.47	4.92	-61.55
5	21395.7	43.63 PK	74	-30.37	-56.55	4.92	-51.63
6	21395.7	35.31 AV	54	-18.69	-64.87	4.92	-59.95
7	22298.1	43.02 PK	74	-30.98	-57.16	4.92	-52.24
8	22298.1	36.8 AV	54	-17.2	-63.38	4.92	-58.46
9	38777.96	35.85 PK	74	-38.15	-64.33	4.92	-59.41
10	38777.96	30.32 AV	54	-23.68	-69.86	4.92	-64.94

Note: Margin value = Emission Level - Limit value

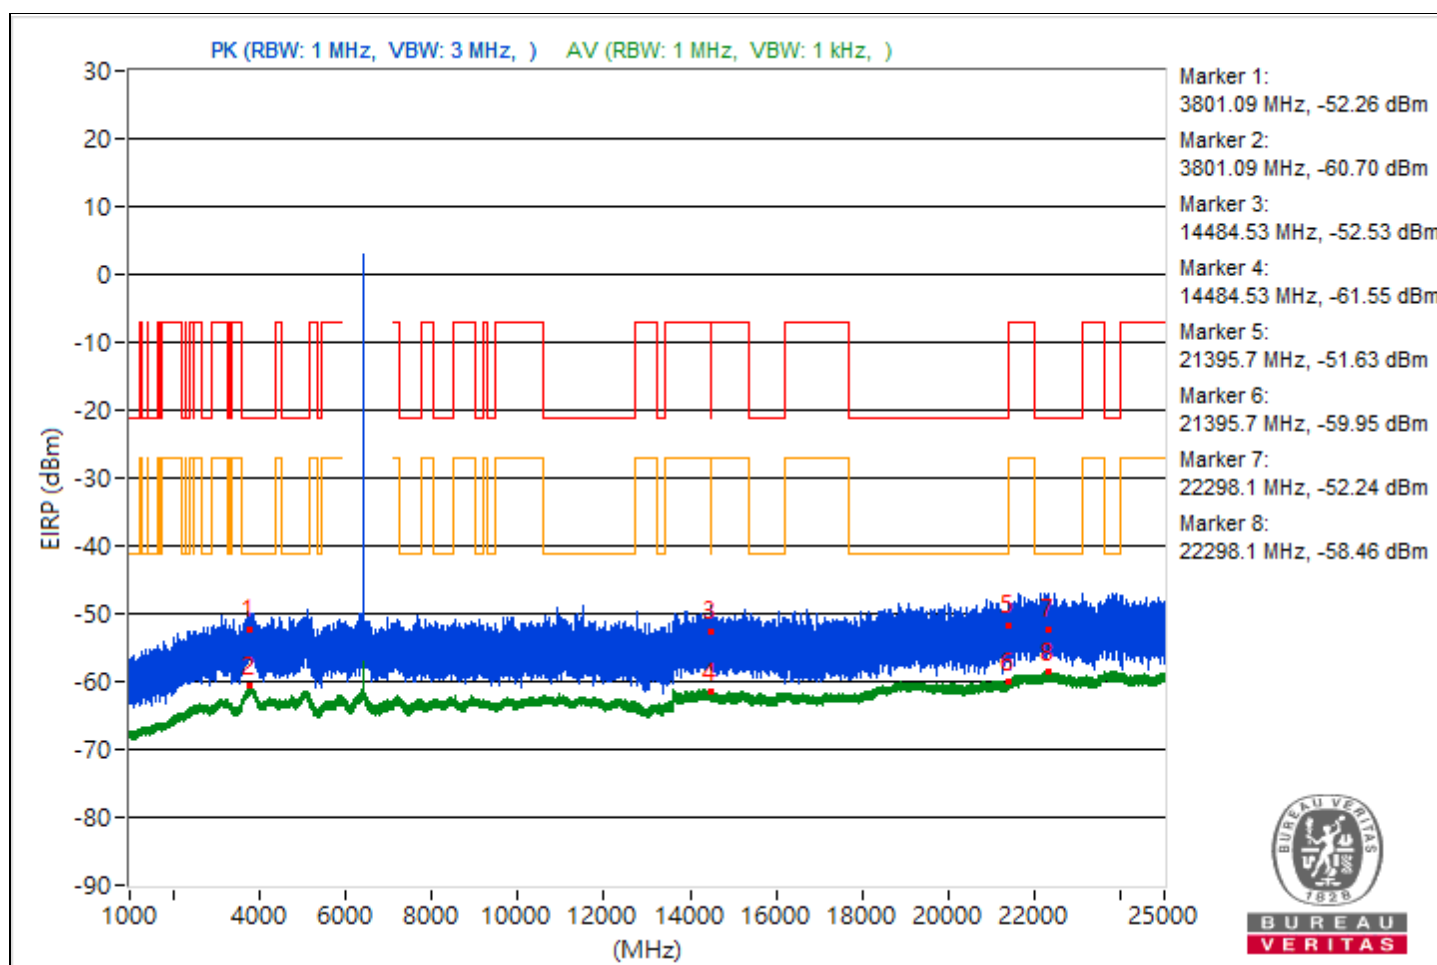


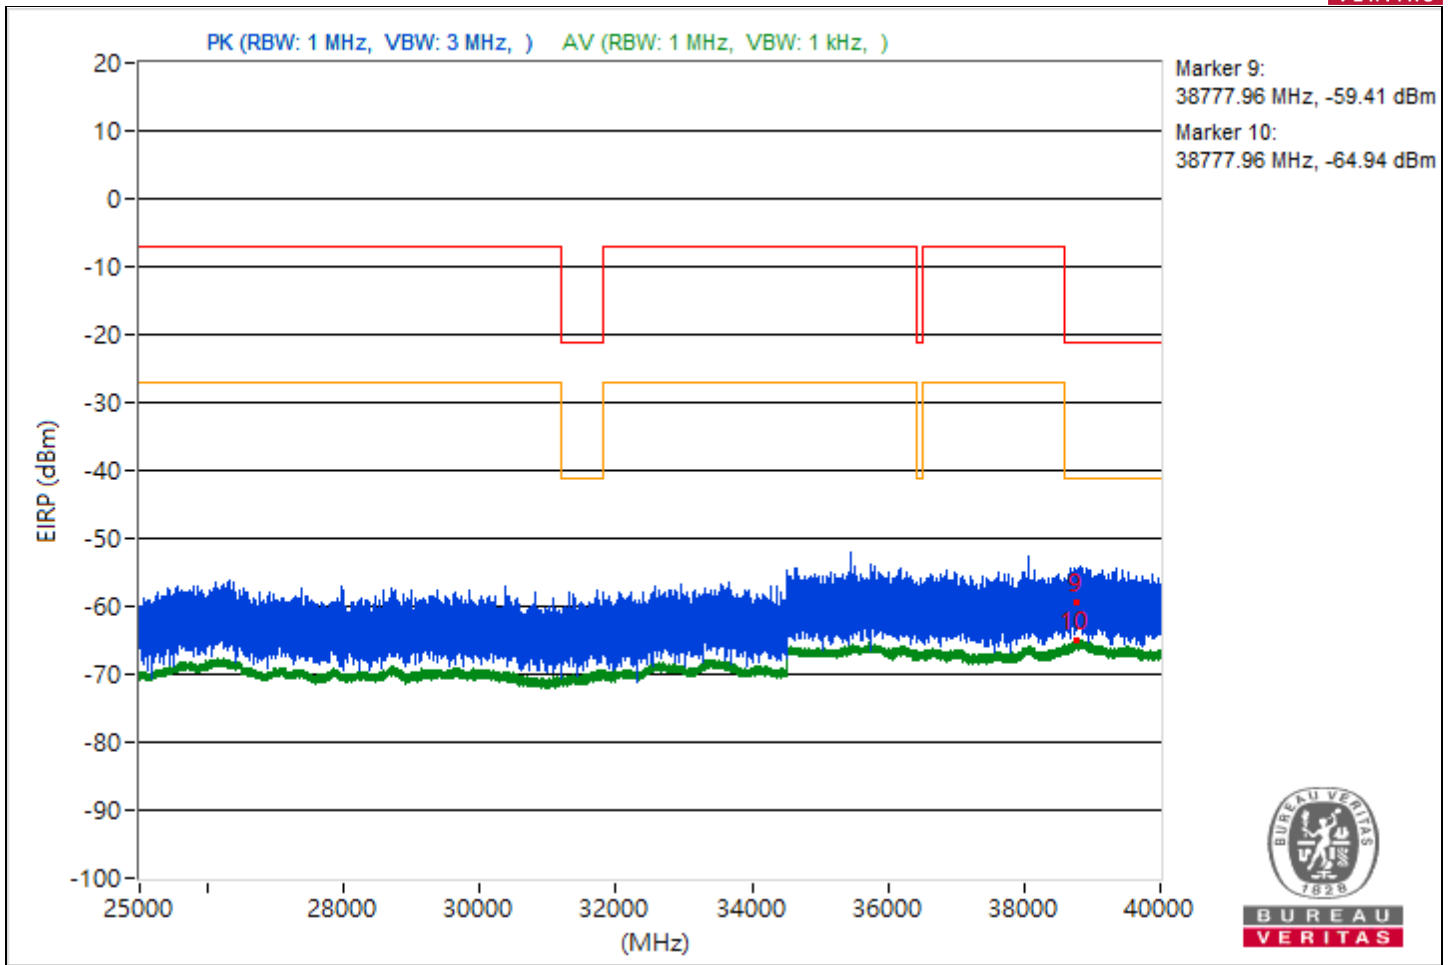


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3846.67	41.21 PK	74	-32.79	-58.97	4.92	-54.05
2	3846.67	34.48 AV	54	-19.52	-65.7	4.92	-60.78
3	14477.07	39.78 PK	74	-34.22	-60.4	4.92	-55.48
4	14477.07	33.68 AV	54	-20.32	-66.5	4.92	-61.58
5	21112.1	41.38 PK	74	-32.62	-58.8	4.92	-53.88
6	21112.1	35.39 AV	54	-18.61	-64.79	4.92	-59.87
7	23670.1	44.42 PK	74	-29.58	-55.76	4.92	-50.84
8	23670.1	36.75 AV	54	-17.25	-63.43	4.92	-58.51
9	38851.73	36.88 PK	74	-37.12	-63.3	4.92	-58.38
10	38851.73	30.36 AV	54	-23.64	-69.82	4.92	-64.9

Note: Margin value = Emission Level - Limit value

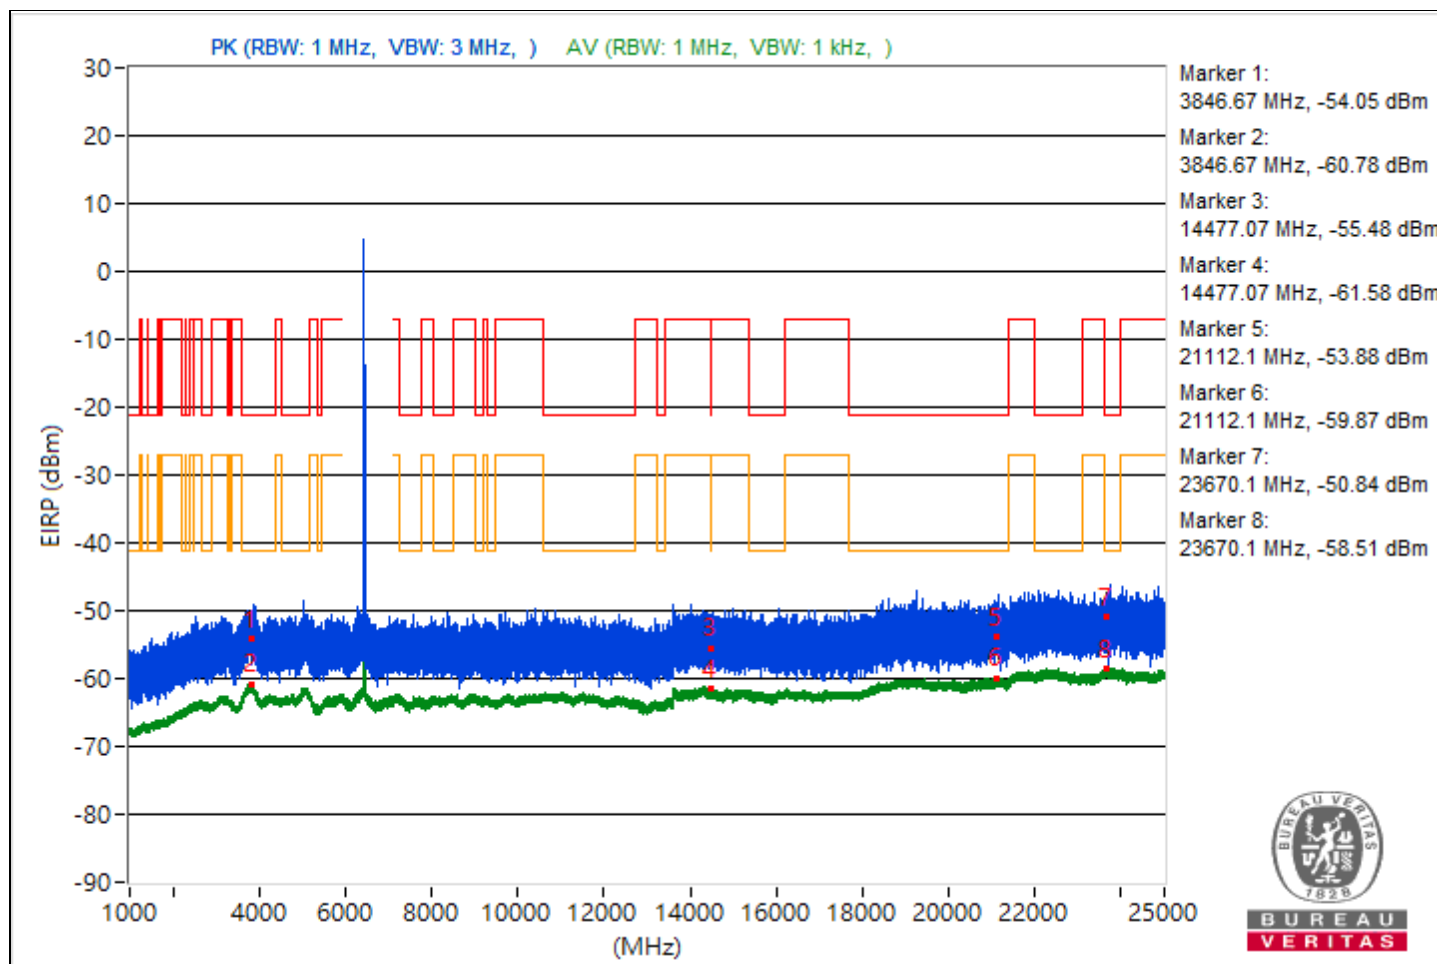


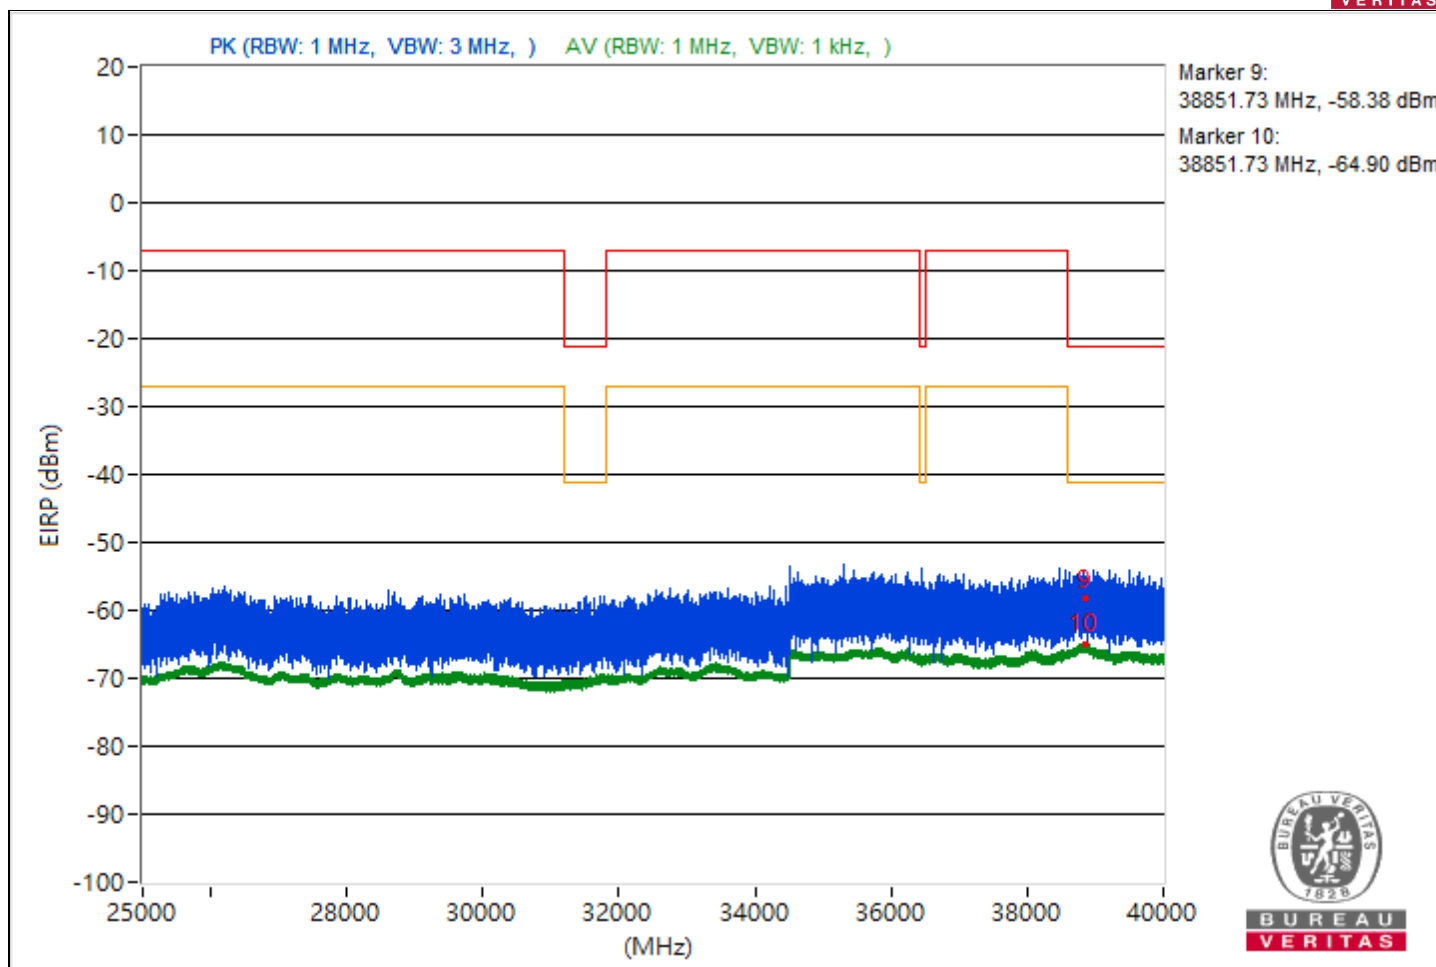


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.8	41.85 PK	74	-32.15	-58.33	4.92	-53.41
2	3809.8	34.4 AV	54	-19.6	-65.78	4.92	-60.86
3	14473.87	41.53 PK	74	-32.47	-58.65	4.92	-53.73
4	14473.87	33.71 AV	54	-20.29	-66.47	4.92	-61.55
5	21191.3	41.41 PK	74	-32.59	-58.77	4.92	-53.85
6	21191.3	35.46 AV	54	-18.54	-64.72	4.92	-59.8
7	23657.2	42.63 PK	74	-31.37	-57.55	4.92	-52.63
8	23657.2	36.91 AV	54	-17.09	-63.27	4.92	-58.35
9	38858.84	35.74 PK	74	-38.26	-64.44	4.92	-59.52
10	38858.84	30.41 AV	54	-23.59	-69.77	4.92	-64.85

Note: Margin value = Emission Level - Limit value

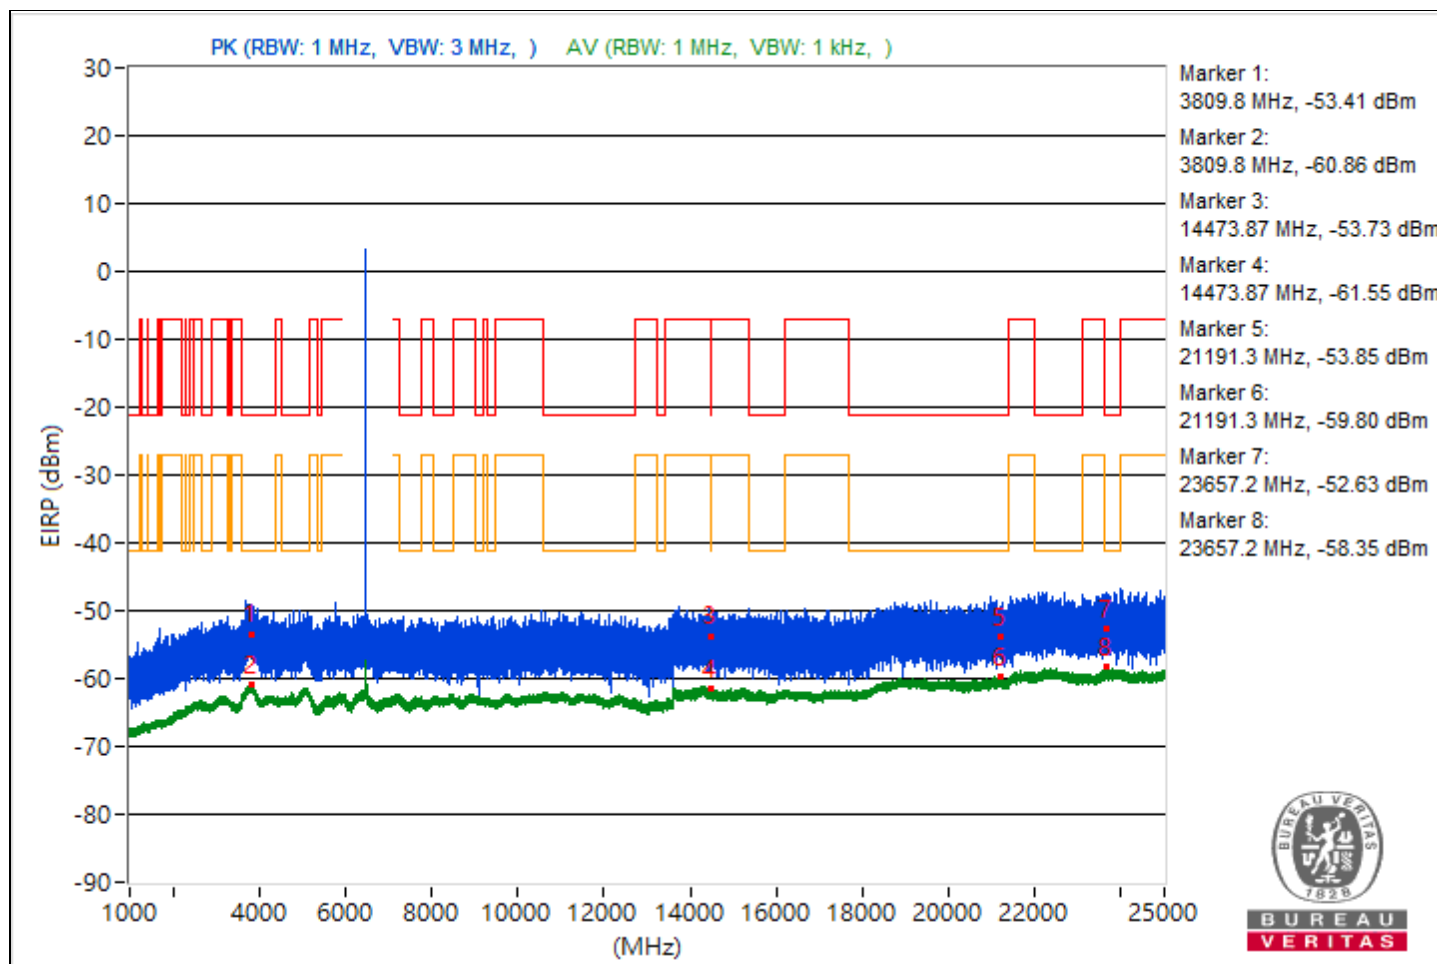


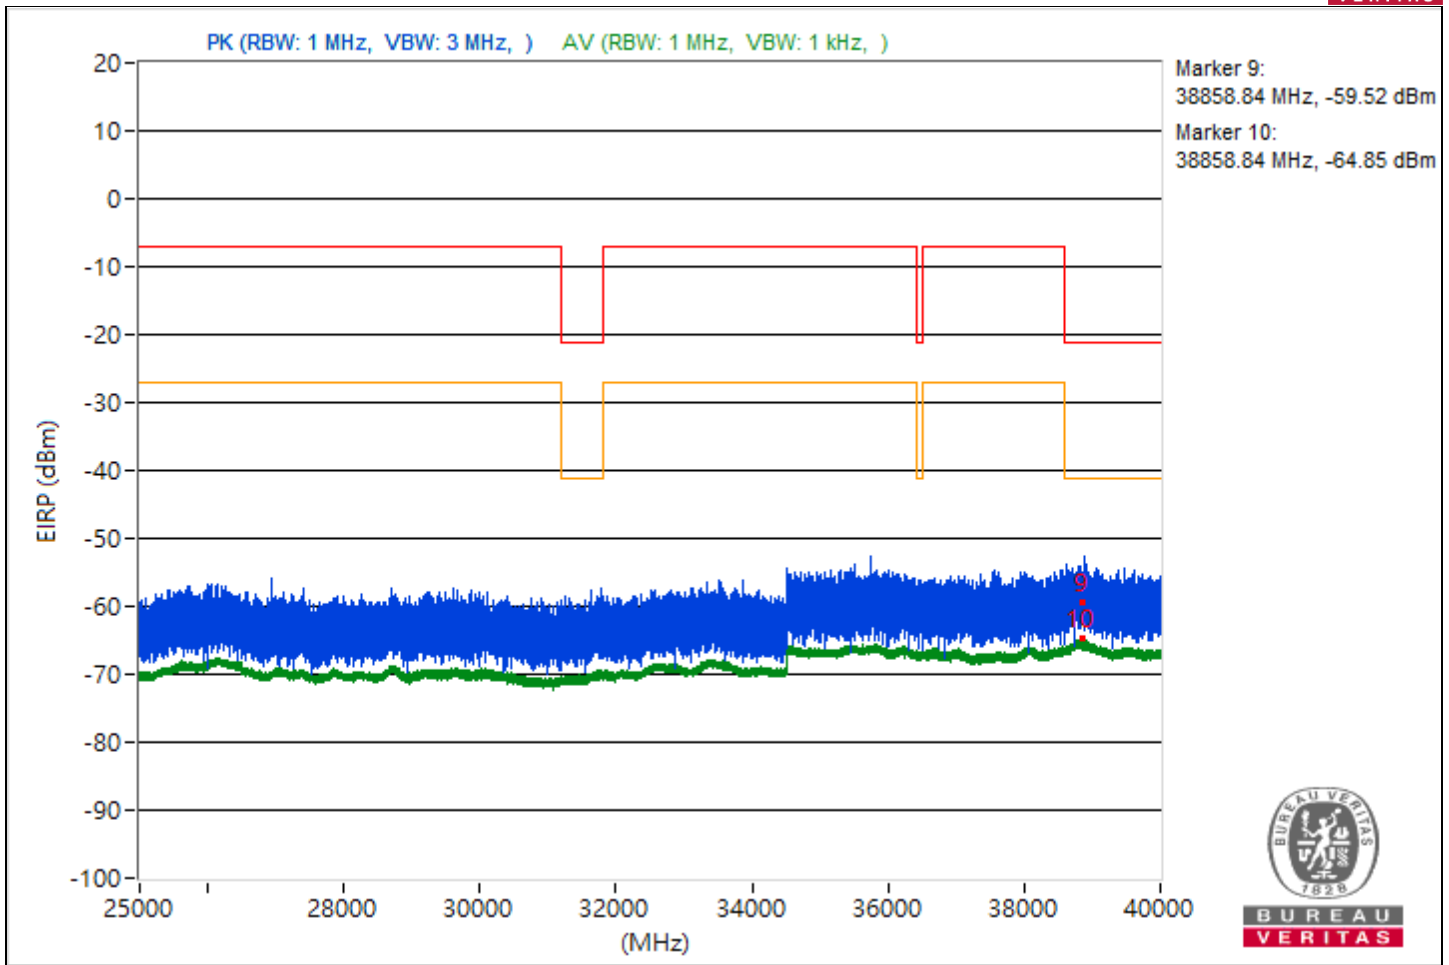


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.83	39.76 PK	74	-34.24	-60.42	4.92	-55.5
2	3812.83	34.47 AV	54	-19.53	-65.71	4.92	-60.79
3	14493.42	40.64 PK	74	-33.36	-59.54	4.92	-54.62
4	14493.42	33.54 AV	54	-20.46	-66.64	4.92	-61.72
5	21137.5	39.67 PK	74	-34.33	-60.51	4.92	-55.59
6	21137.5	35.42 AV	54	-18.58	-64.76	4.92	-59.84
7	23908.8	42.3 PK	74	-31.7	-57.88	4.92	-52.96
8	23908.8	36.76 AV	54	-17.24	-63.42	4.92	-58.5
9	38796.98	38.11 PK	74	-35.89	-62.07	4.92	-57.15
10	38796.98	30.25 AV	54	-23.75	-69.93	4.92	-65.01

Note: Margin value = Emission Level - Limit value

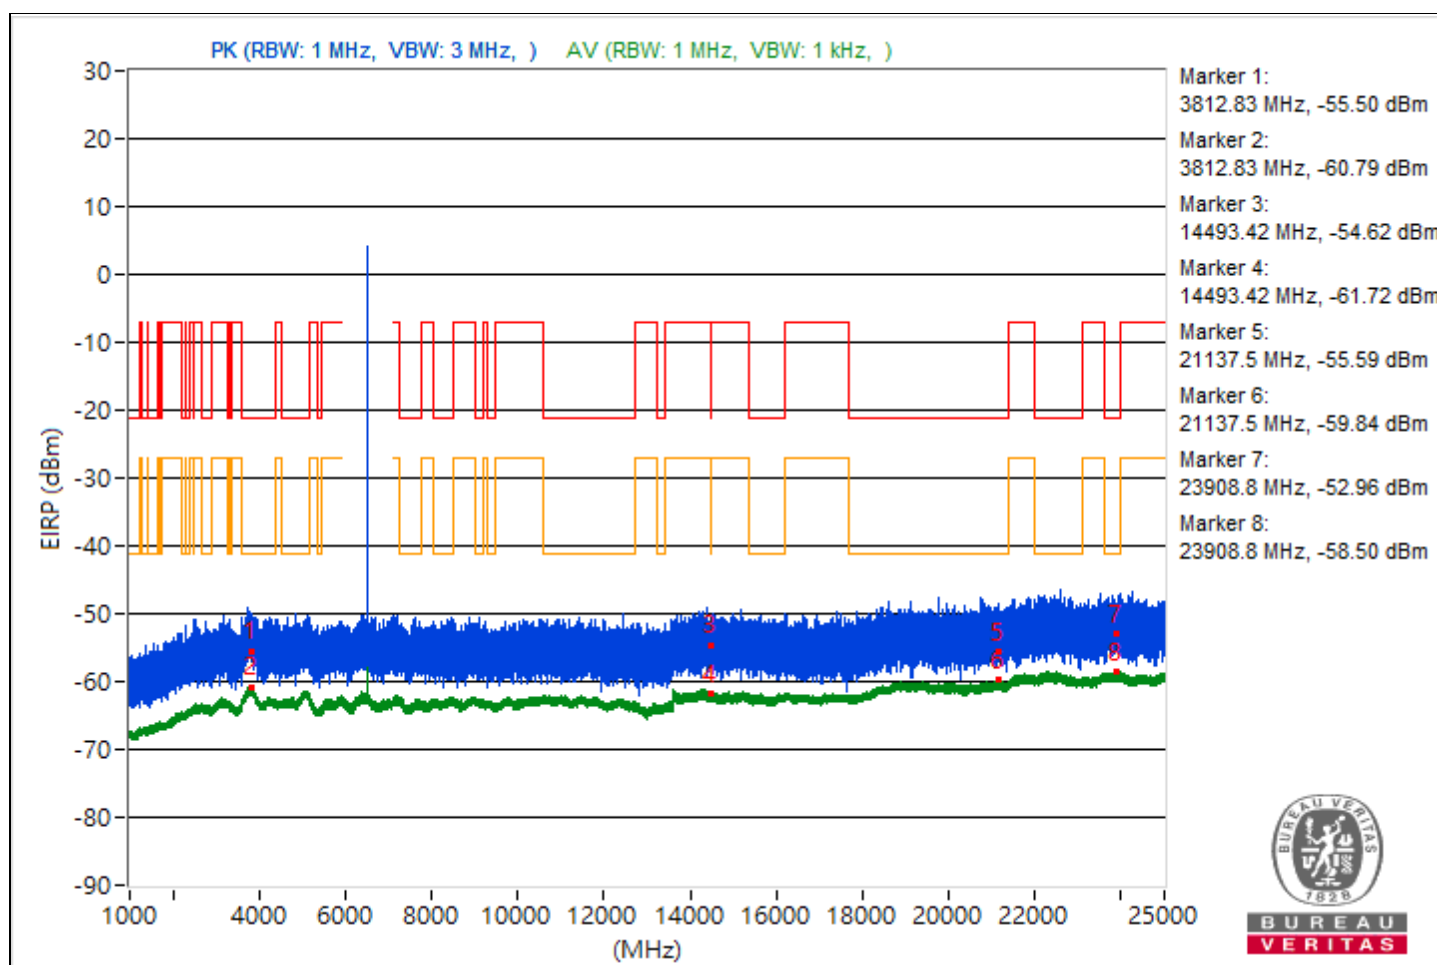


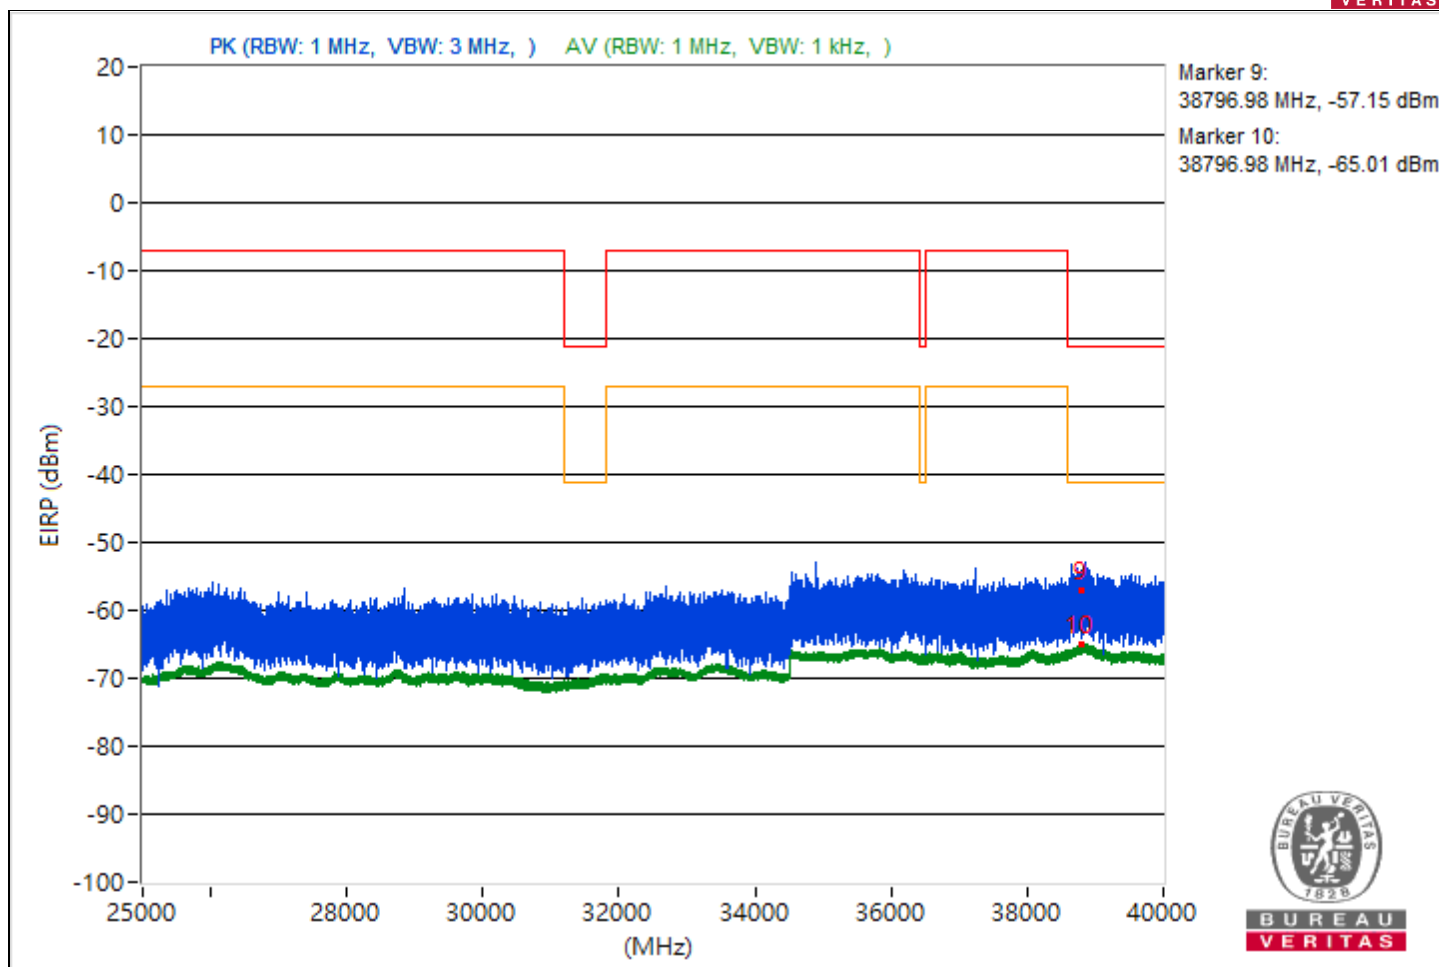


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3792.92	41.31 PK	74	-32.69	-58.87	4.92	-53.95
2	3792.92	34.75 AV	54	-19.25	-65.43	4.92	-60.51
3	14495.11	39.77 PK	74	-34.23	-60.41	4.92	-55.49
4	14495.11	33.71 AV	54	-20.29	-66.47	4.92	-61.55
5	21134.6	41.52 PK	74	-32.48	-58.66	4.92	-53.74
6	21134.6	35.46 AV	54	-18.54	-64.72	4.92	-59.8
7	23869.1	42.97 PK	74	-31.03	-57.21	4.92	-52.29
8	23869.1	36.75 AV	54	-17.25	-63.43	4.92	-58.51
9	38797.07	36.95 PK	74	-37.05	-63.23	4.92	-58.31
10	38797.07	30.31 AV	54	-23.69	-69.87	4.92	-64.95

Note: Margin value = Emission Level - Limit value

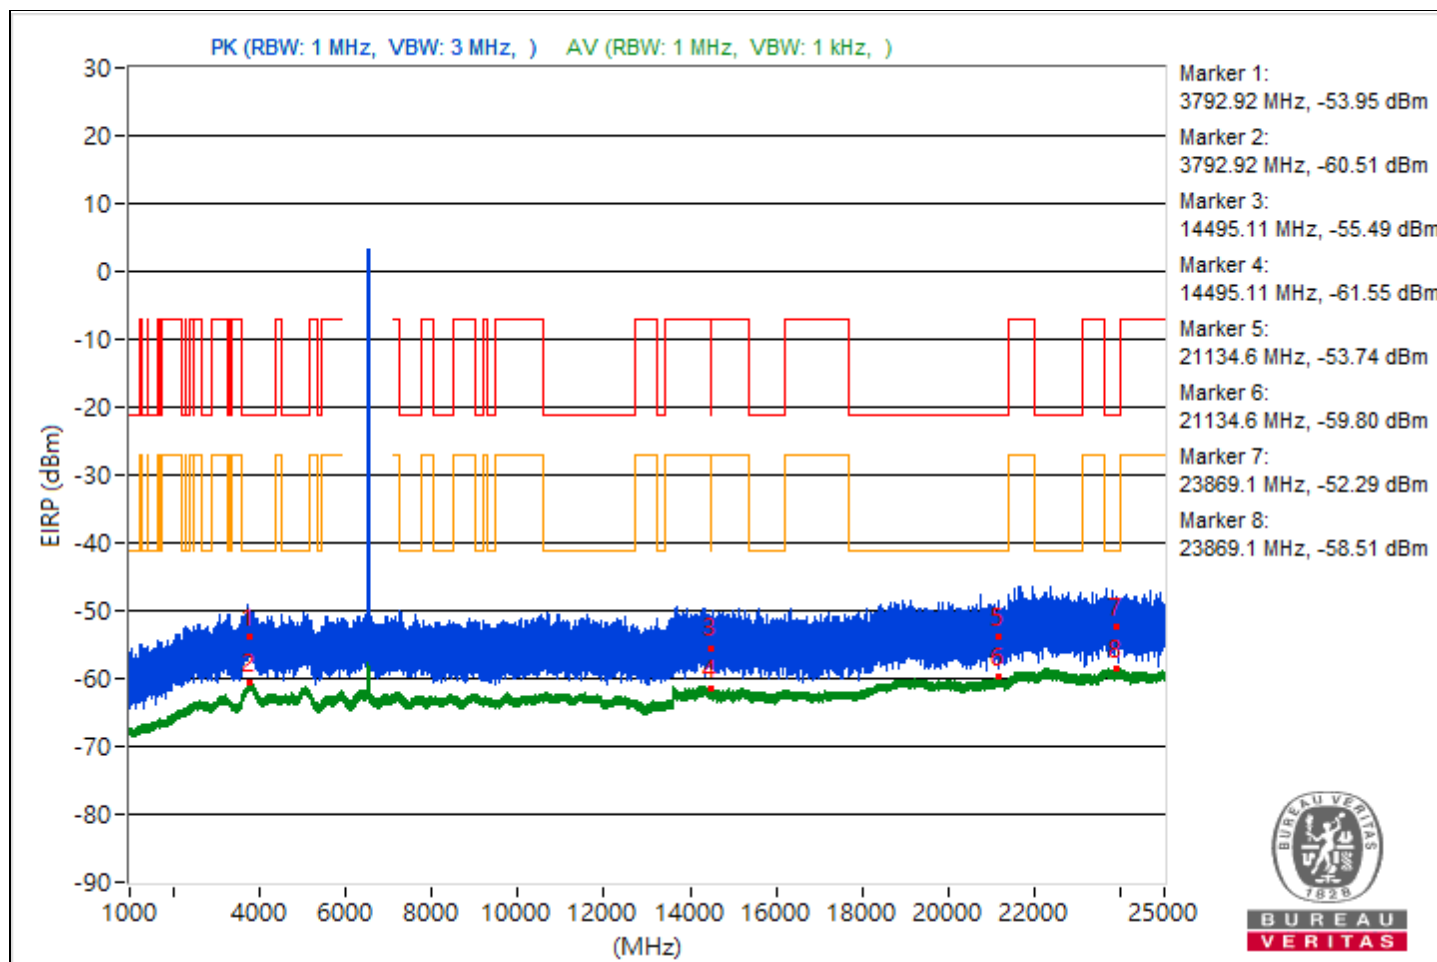


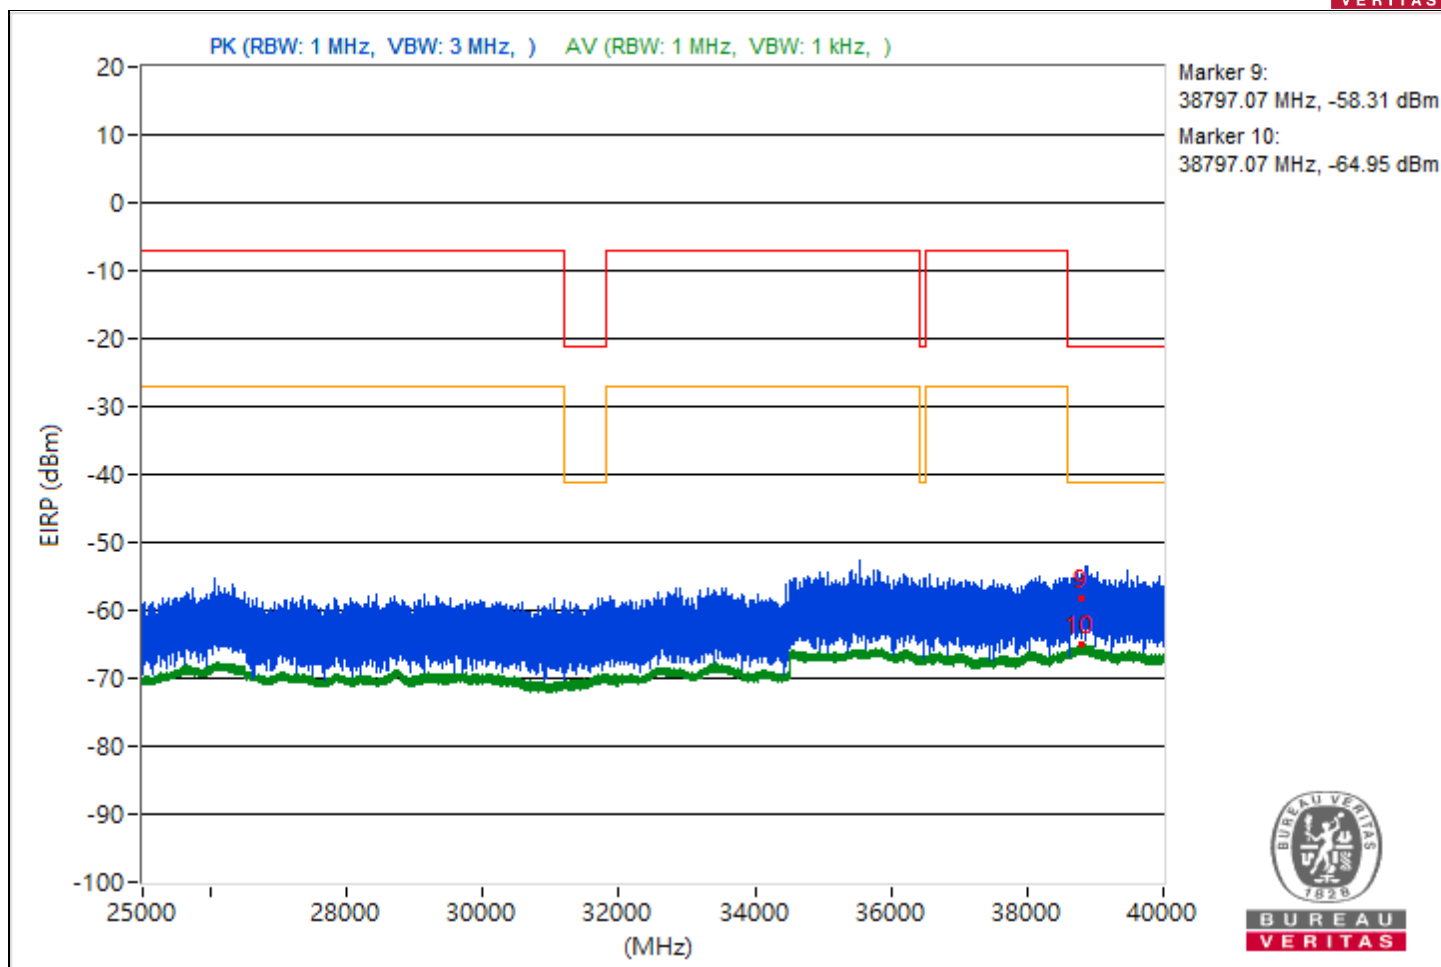


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3794.4	41.21 PK	74	-32.79	-58.97	4.92	-54.05
2	3794.4	34.67 AV	54	-19.33	-65.51	4.92	-60.59
3	14473.16	40.79 PK	74	-33.21	-59.39	4.92	-54.47
4	14473.16	33.66 AV	54	-20.34	-66.52	4.92	-61.6
5	21142.8	44.89 PK	74	-29.11	-55.29	4.92	-50.37
6	21142.8	35.56 AV	54	-18.44	-64.62	4.92	-59.7
7	22261.9	45.37 PK	74	-28.63	-54.81	4.92	-49.89
8	22261.9	36.73 AV	54	-17.27	-63.45	4.92	-58.53
9	38764.53	35.42 PK	74	-38.58	-64.76	4.92	-59.84
10	38764.53	30.31 AV	54	-23.69	-69.87	4.92	-64.95

Note: Margin value = Emission Level - Limit value

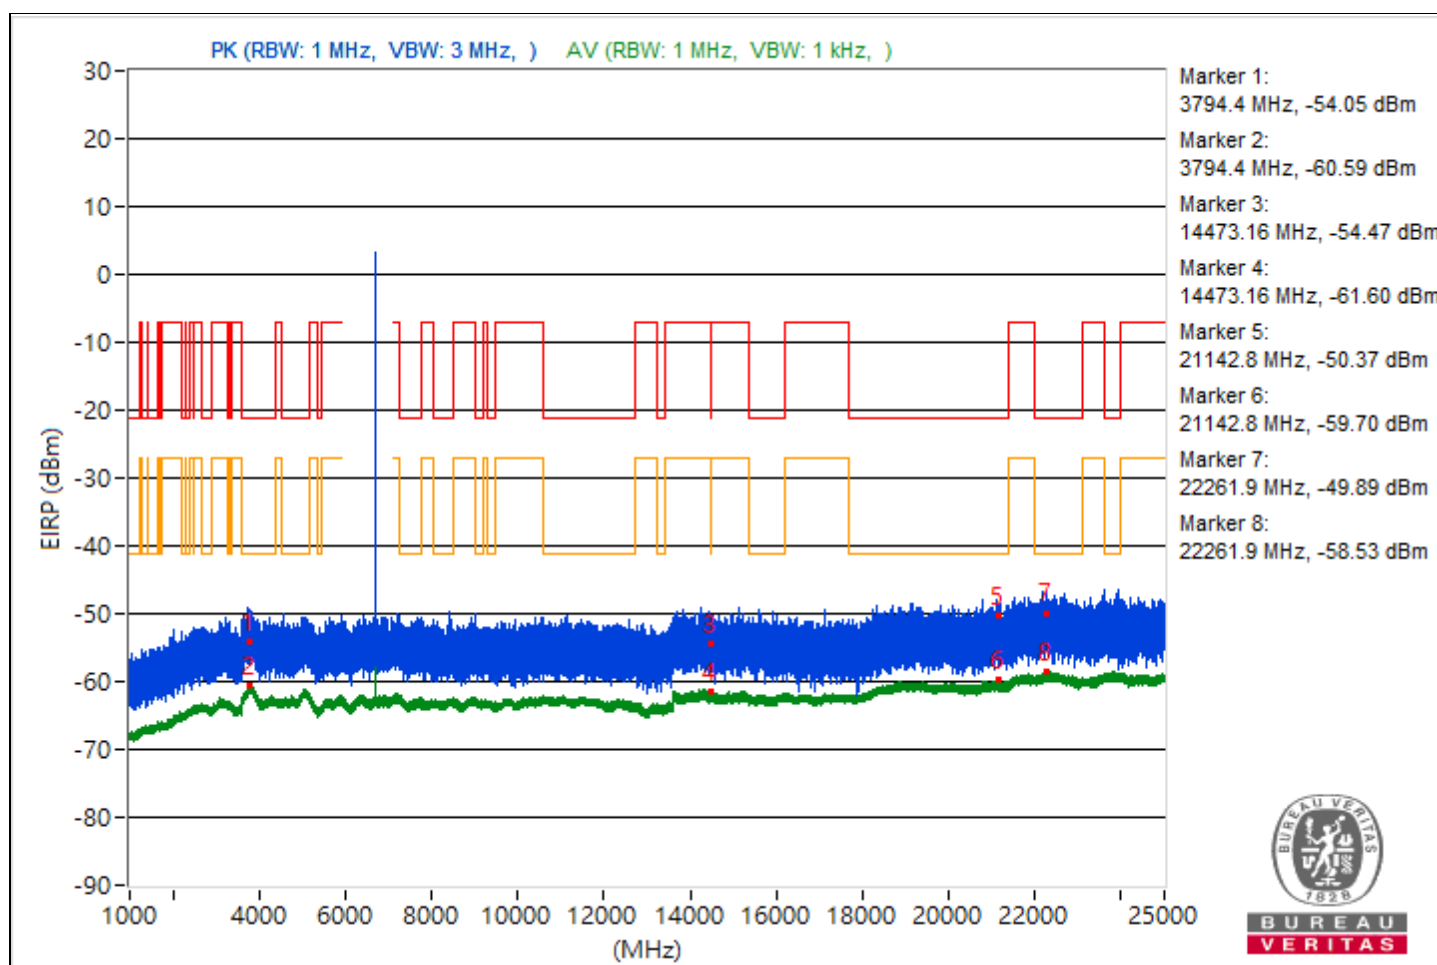


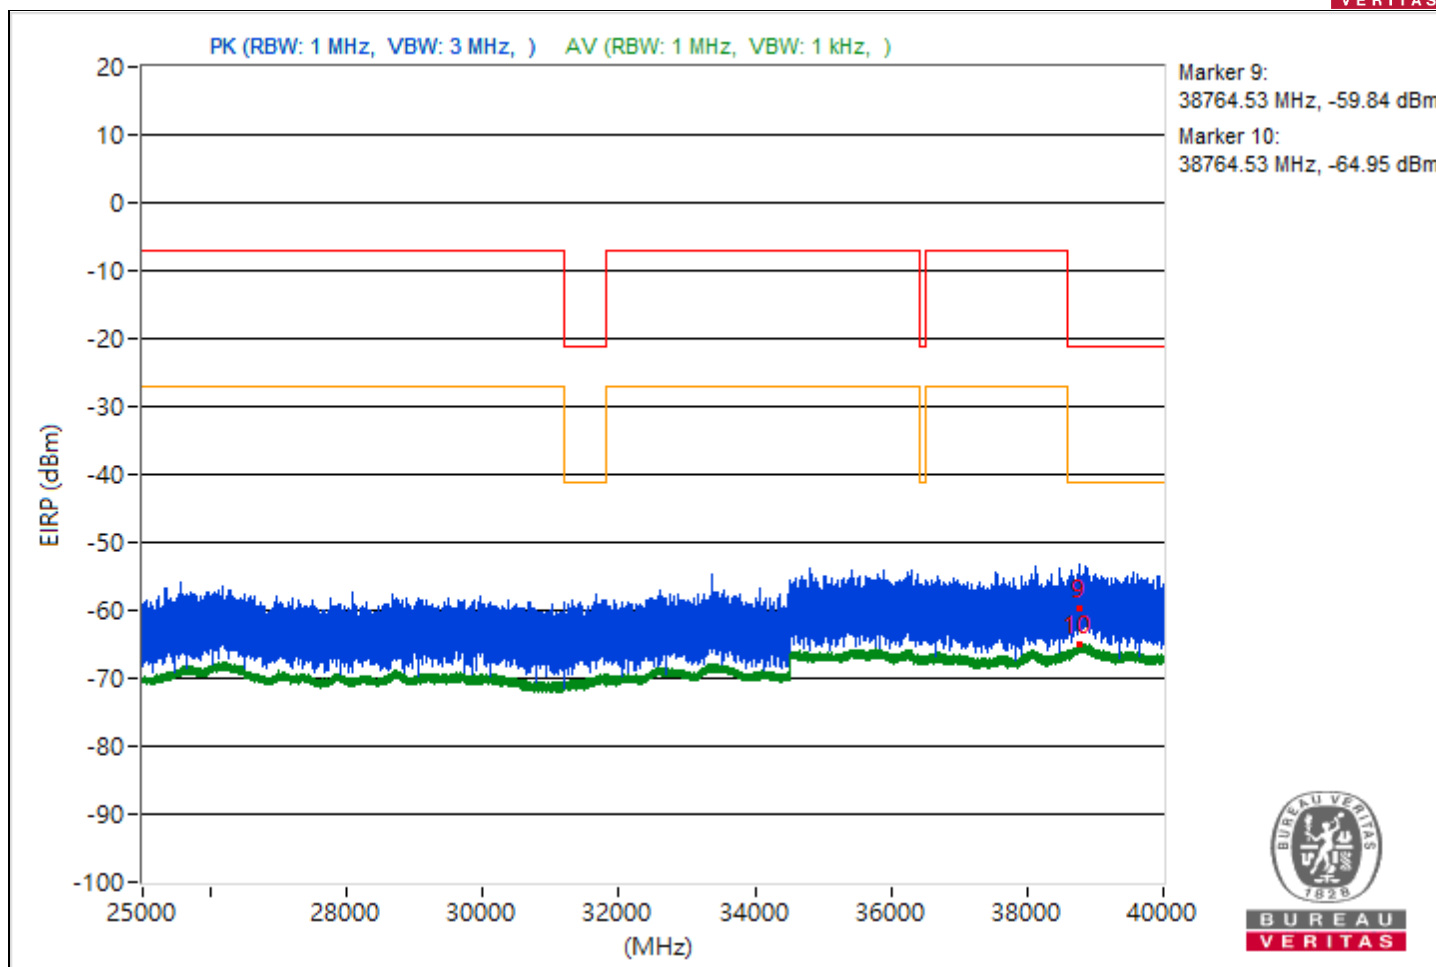


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3830.26	40.71 PK	74	-33.29	-59.47	4.92	-54.55
2	3830.26	34.43 AV	54	-19.57	-65.75	4.92	-60.83
3	14482.76	41.13 PK	74	-32.87	-59.05	4.92	-54.13
4	14482.76	33.67 AV	54	-20.33	-66.51	4.92	-61.59
5	21078.4	43.24 PK	74	-30.76	-56.94	4.92	-52.02
6	21078.4	35.39 AV	54	-18.61	-64.79	4.92	-59.87
7	23868	42.33 PK	74	-31.67	-57.85	4.92	-52.93
8	23868	36.66 AV	54	-17.34	-63.52	4.92	-58.6
9	38849.33	39.1 PK	74	-34.9	-61.08	4.92	-56.16
10	38849.33	30.33 AV	54	-23.67	-69.85	4.92	-64.93

Note: Margin value = Emission Level - Limit value

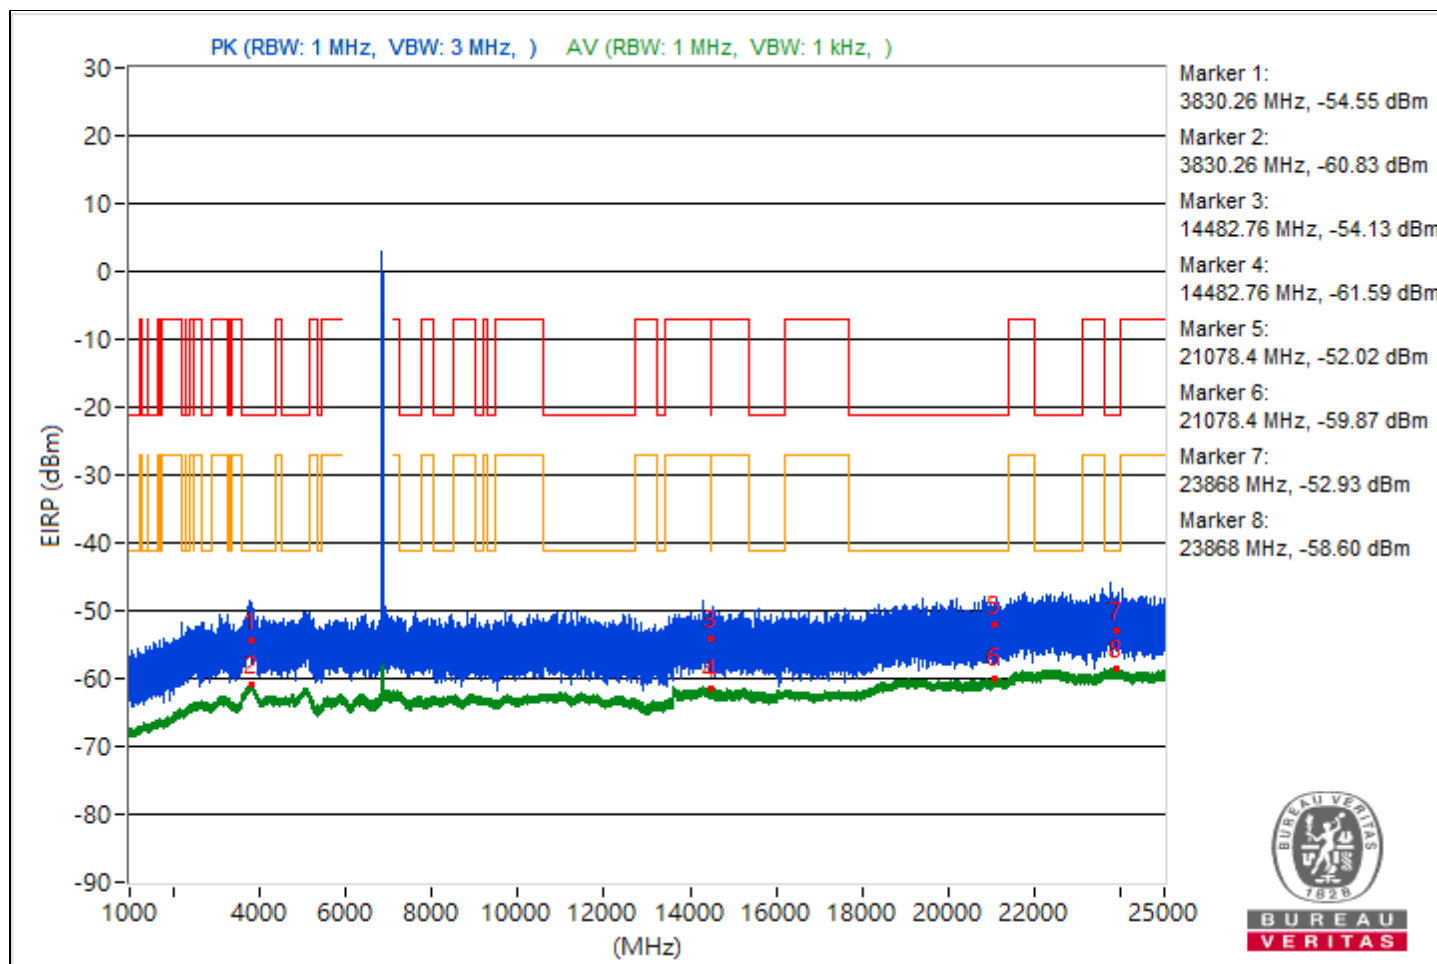


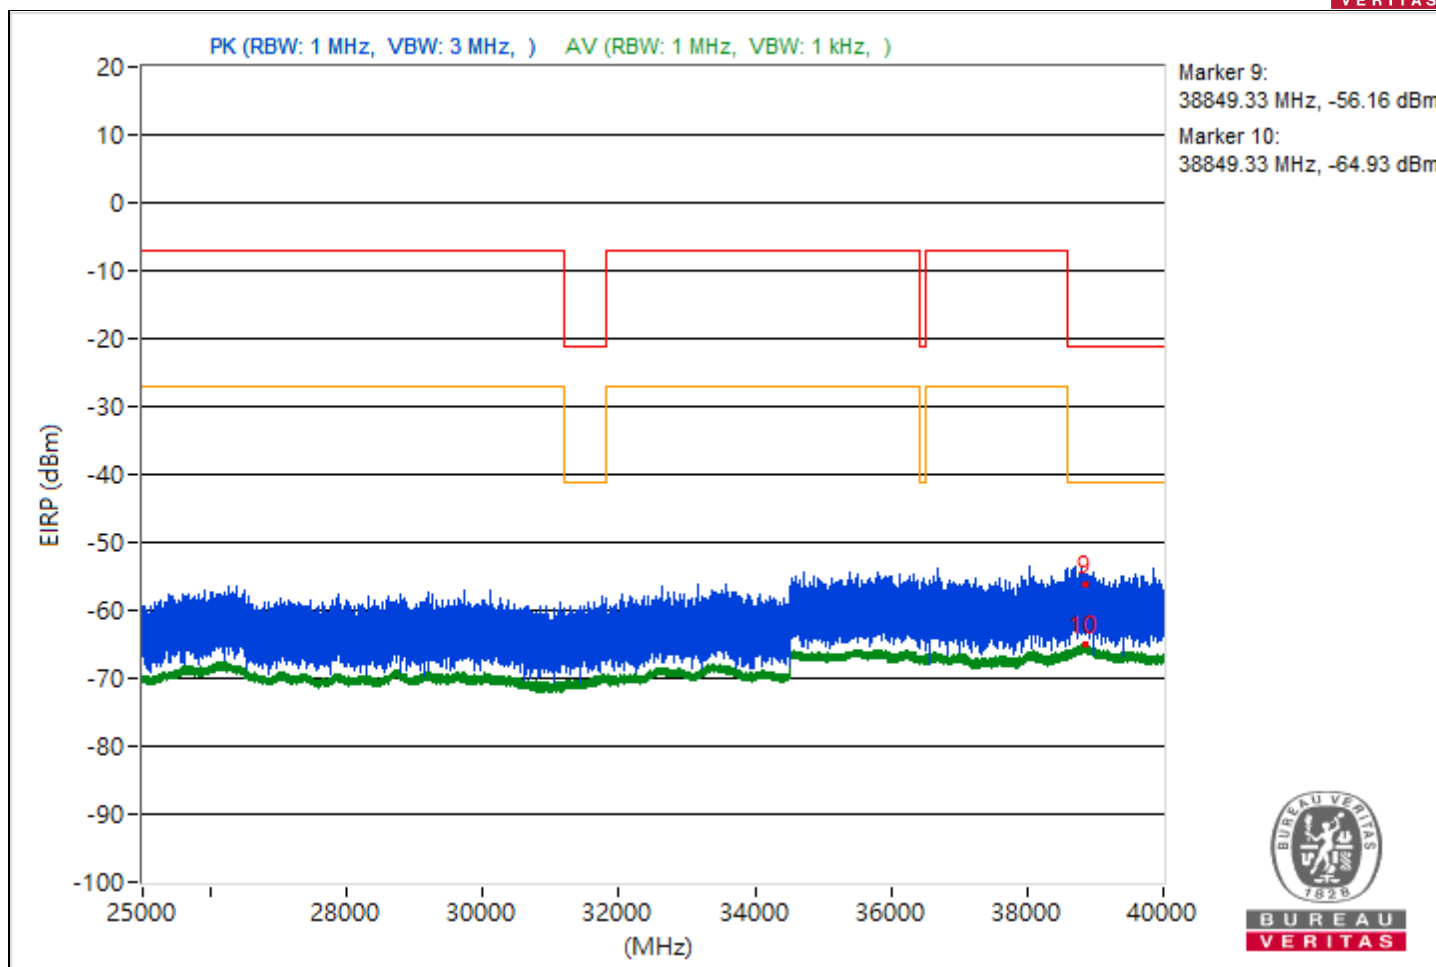


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.7	41.38 PK	74	-32.62	-58.8	4.92	-53.88
2	3807.7	34.49 AV	54	-19.51	-65.69	4.92	-60.77
3	14488.98	38.24 PK	74	-35.76	-61.94	4.92	-57.02
4	14488.98	33.55 AV	54	-20.45	-66.63	4.92	-61.71
5	21128.5	39.85 PK	74	-34.15	-60.33	4.92	-55.41
6	21128.5	35.34 AV	54	-18.66	-64.84	4.92	-59.92
7	22196.2	40.94 PK	74	-33.06	-59.24	4.92	-54.32
8	22196.2	36.71 AV	54	-17.29	-63.47	4.92	-58.55
9	38840.62	36.01 PK	74	-37.99	-64.17	4.92	-59.25
10	38840.62	30.38 AV	54	-23.62	-69.8	4.92	-64.88

Note: Margin value = Emission Level - Limit value

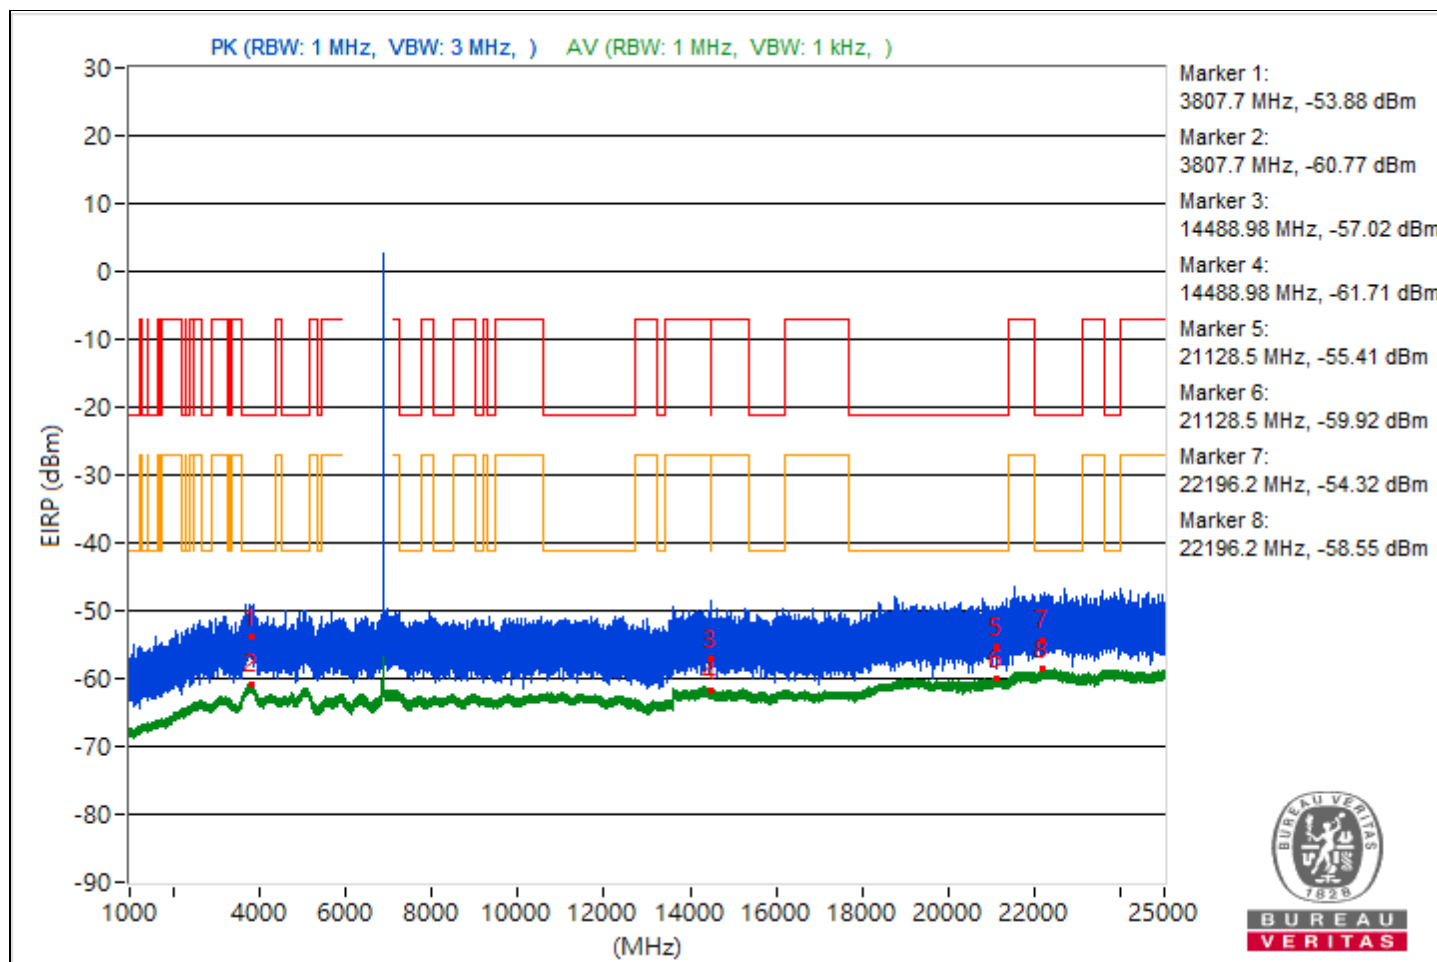


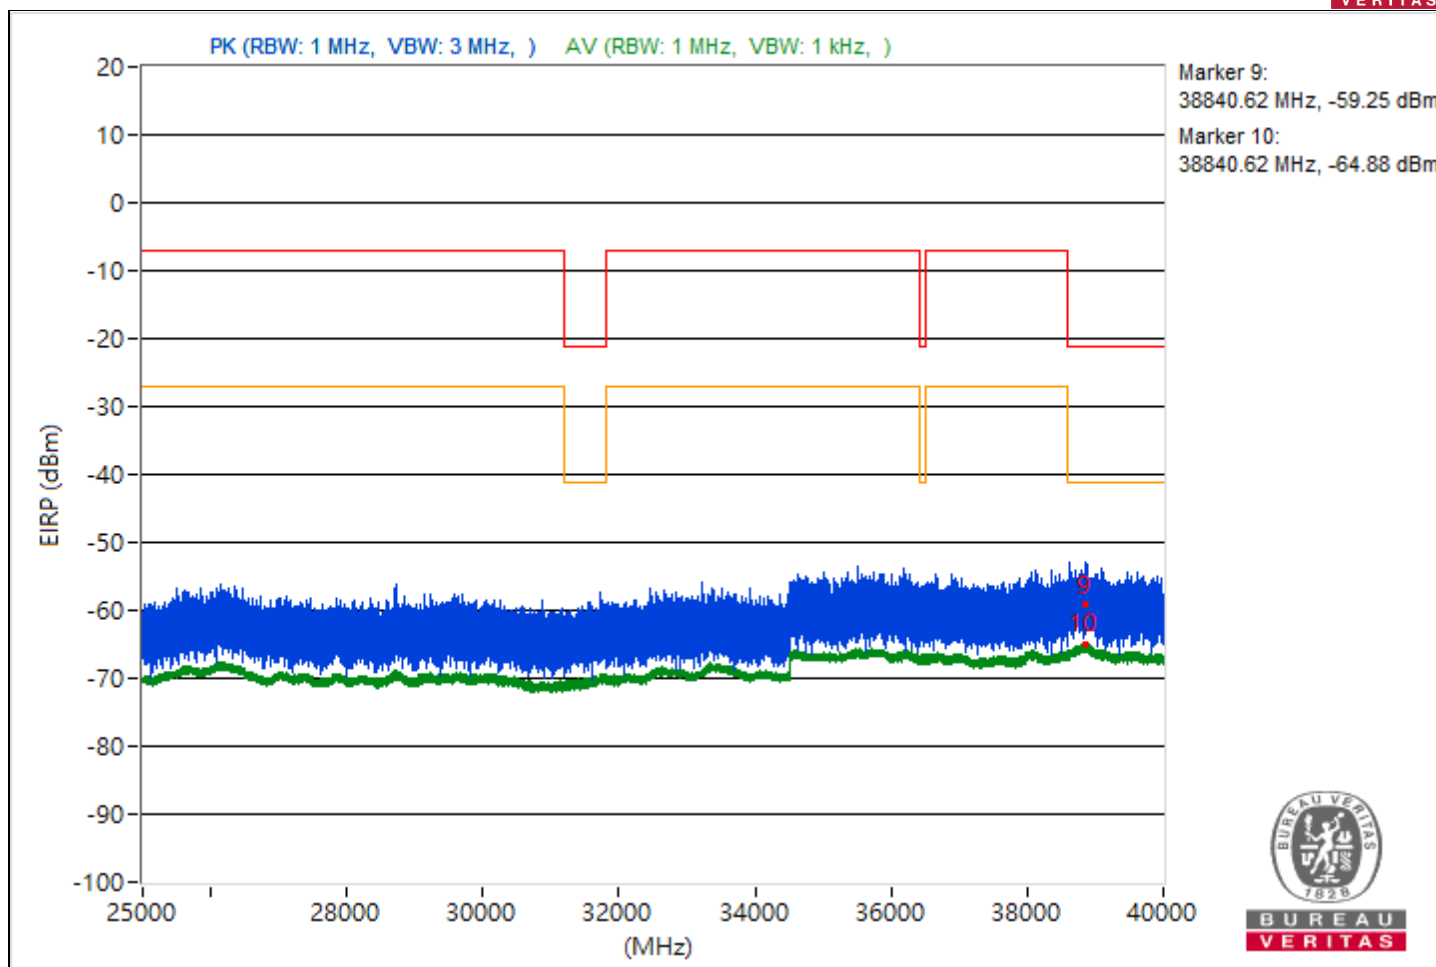


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3784.37	41.31 PK	74	-32.69	-58.87	4.92	-53.95
2	3784.37	34.36 AV	54	-19.64	-65.82	4.92	-60.9
3	14488.98	38.64 PK	74	-35.36	-61.54	4.92	-56.62
4	14488.98	33.97 AV	54	-20.03	-66.21	4.92	-61.29
5	21185.7	44.85 PK	74	-29.15	-55.33	4.92	-50.41
6	21185.7	35.41 AV	54	-18.59	-64.77	4.92	-59.85
7	23785.4	43.87 PK	74	-30.13	-56.31	4.92	-51.39
8	23785.4	36.64 AV	54	-17.36	-63.54	4.92	-58.62
9	38830.58	35.4 PK	74	-38.6	-64.78	4.92	-59.86
10	38830.58	30.34 AV	54	-23.66	-69.84	4.92	-64.92

Note: Margin value = Emission Level - Limit value

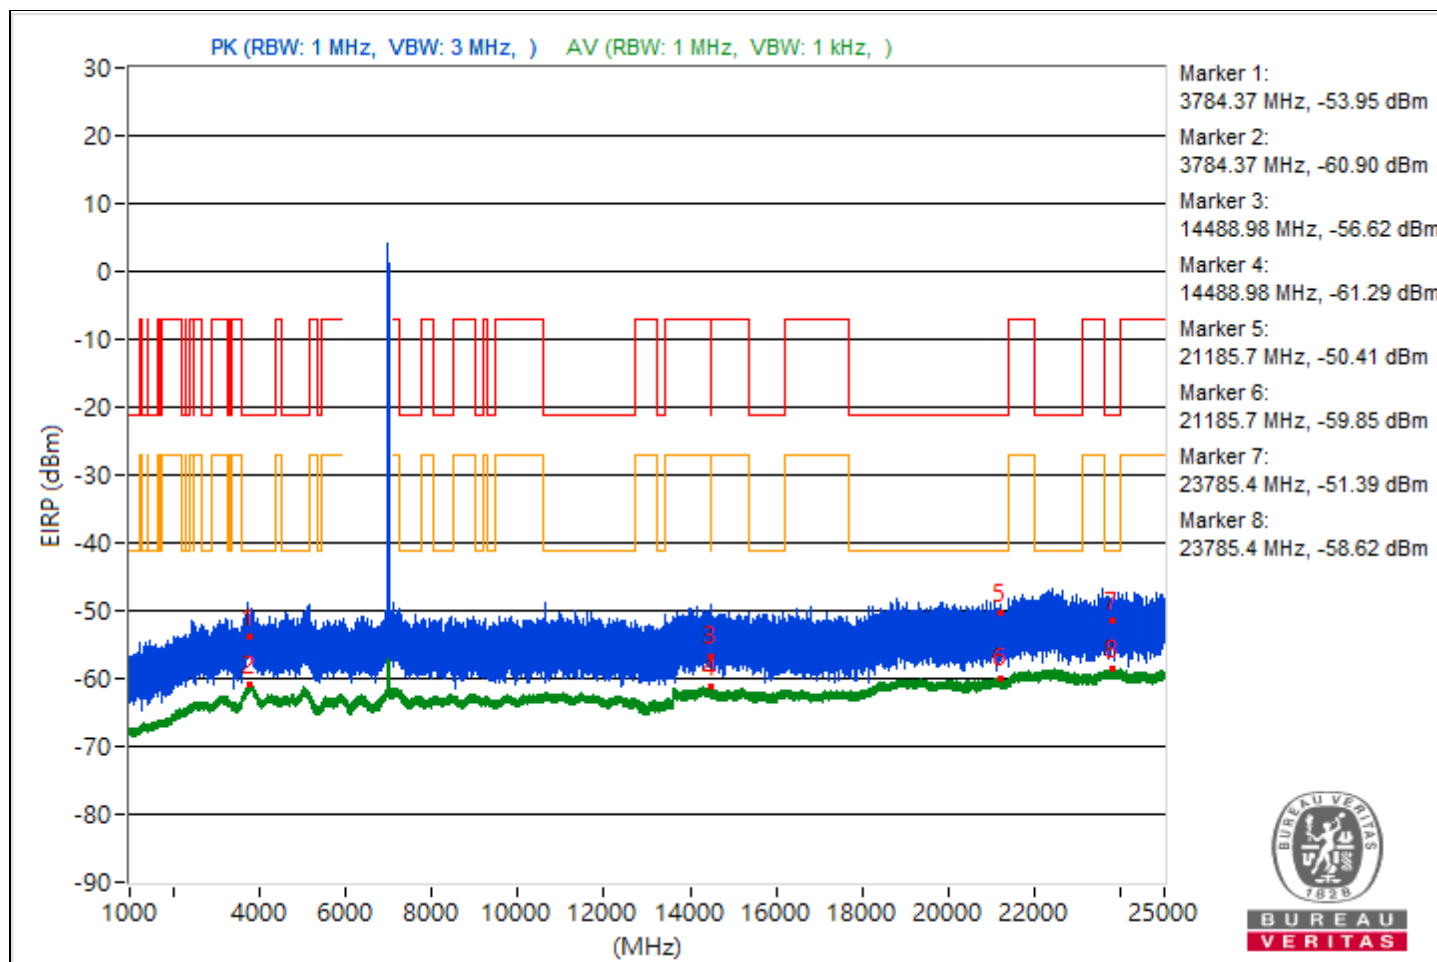


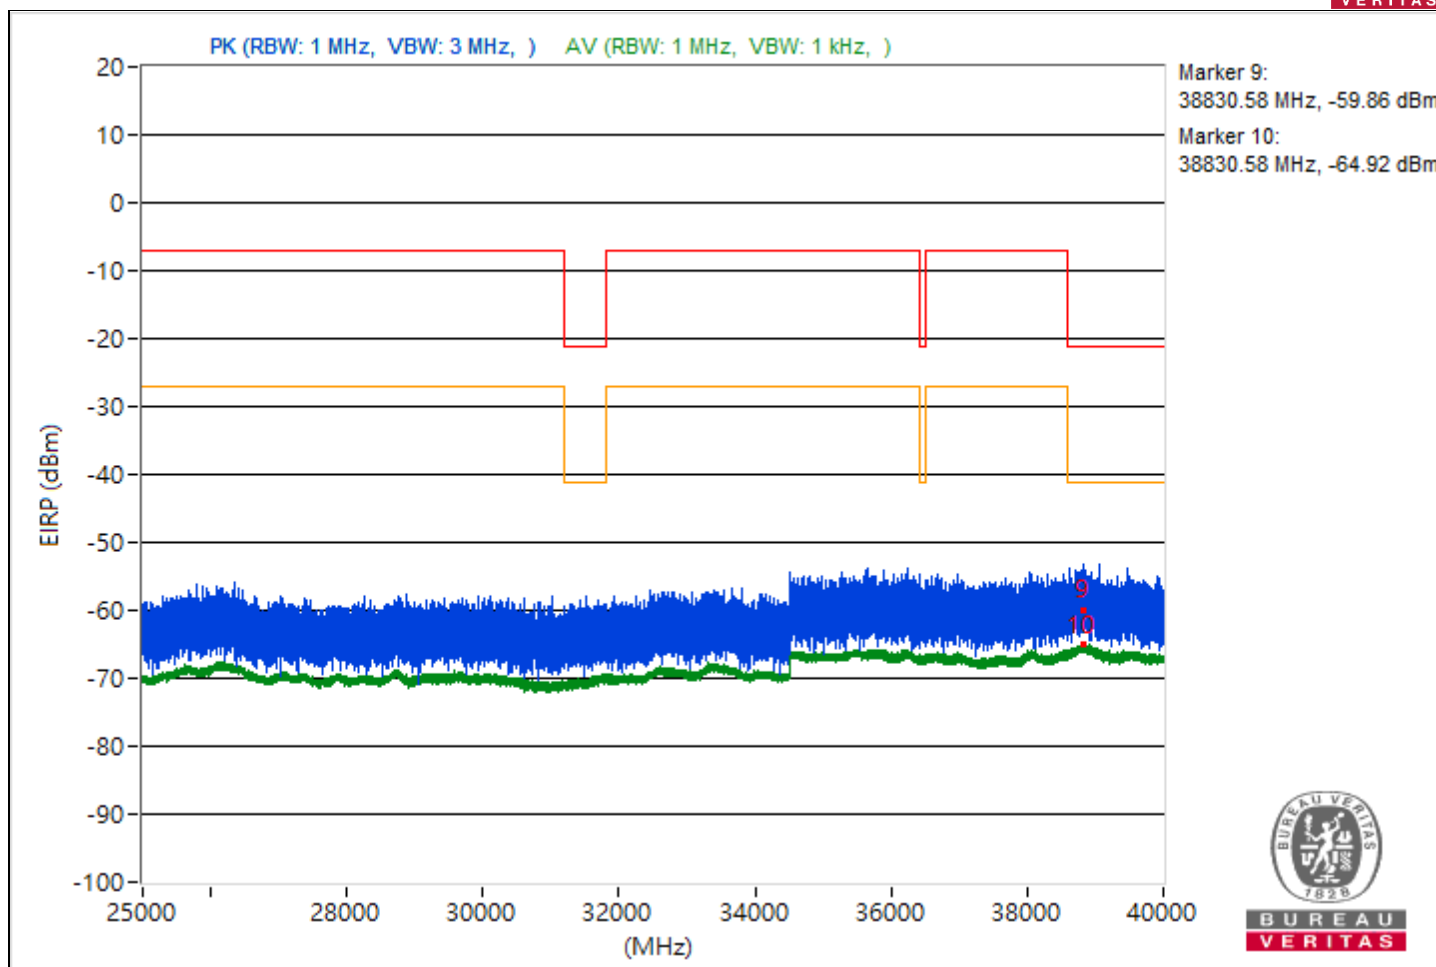


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3818.2	43.53 PK	74	-30.47	-56.65	4.92	-51.73
2	3818.2	34.4 AV	54	-19.6	-65.78	4.92	-60.86
3	7258.39	41.6 PK	74	-32.4	-58.58	4.92	-53.66
4	7258.39	34.46 AV	54	-19.54	-65.72	4.92	-60.8
5	21170.9	40.44 PK	74	-33.56	-59.74	4.92	-54.82
6	21170.9	35.58 AV	54	-18.42	-64.6	4.92	-59.68
7	23651.3	44.33 PK	74	-29.67	-55.85	4.92	-50.93
8	23651.3	36.67 AV	54	-17.33	-63.51	4.92	-58.59
9	38825.42	38.3 PK	74	-35.7	-61.88	4.92	-56.96
10	38825.42	30.26 AV	54	-23.74	-69.92	4.92	-65

Note: Margin value = Emission Level - Limit value

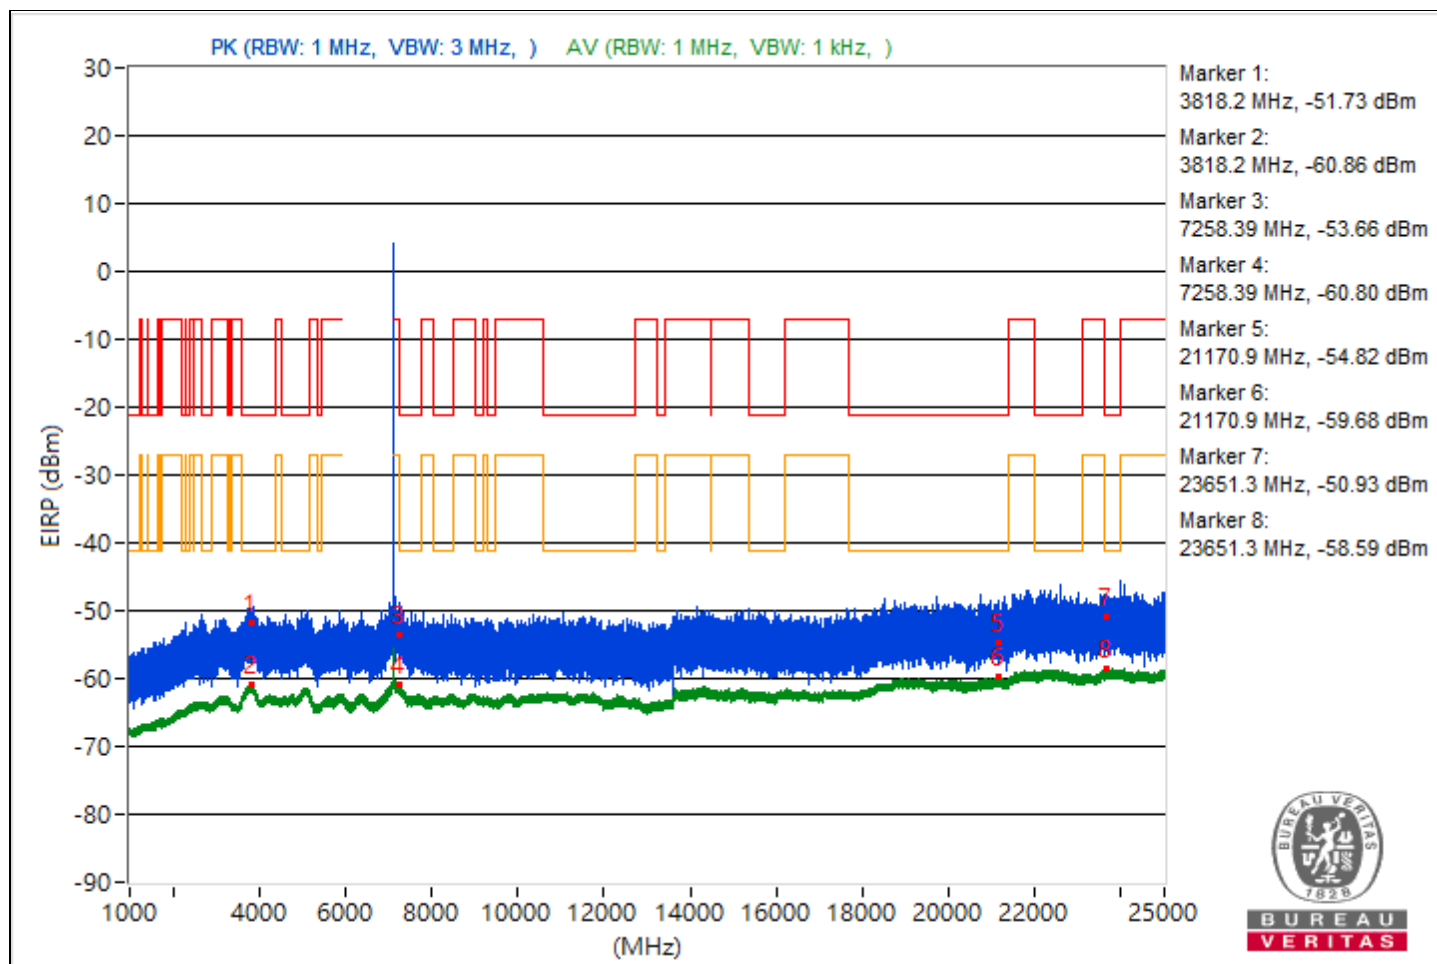

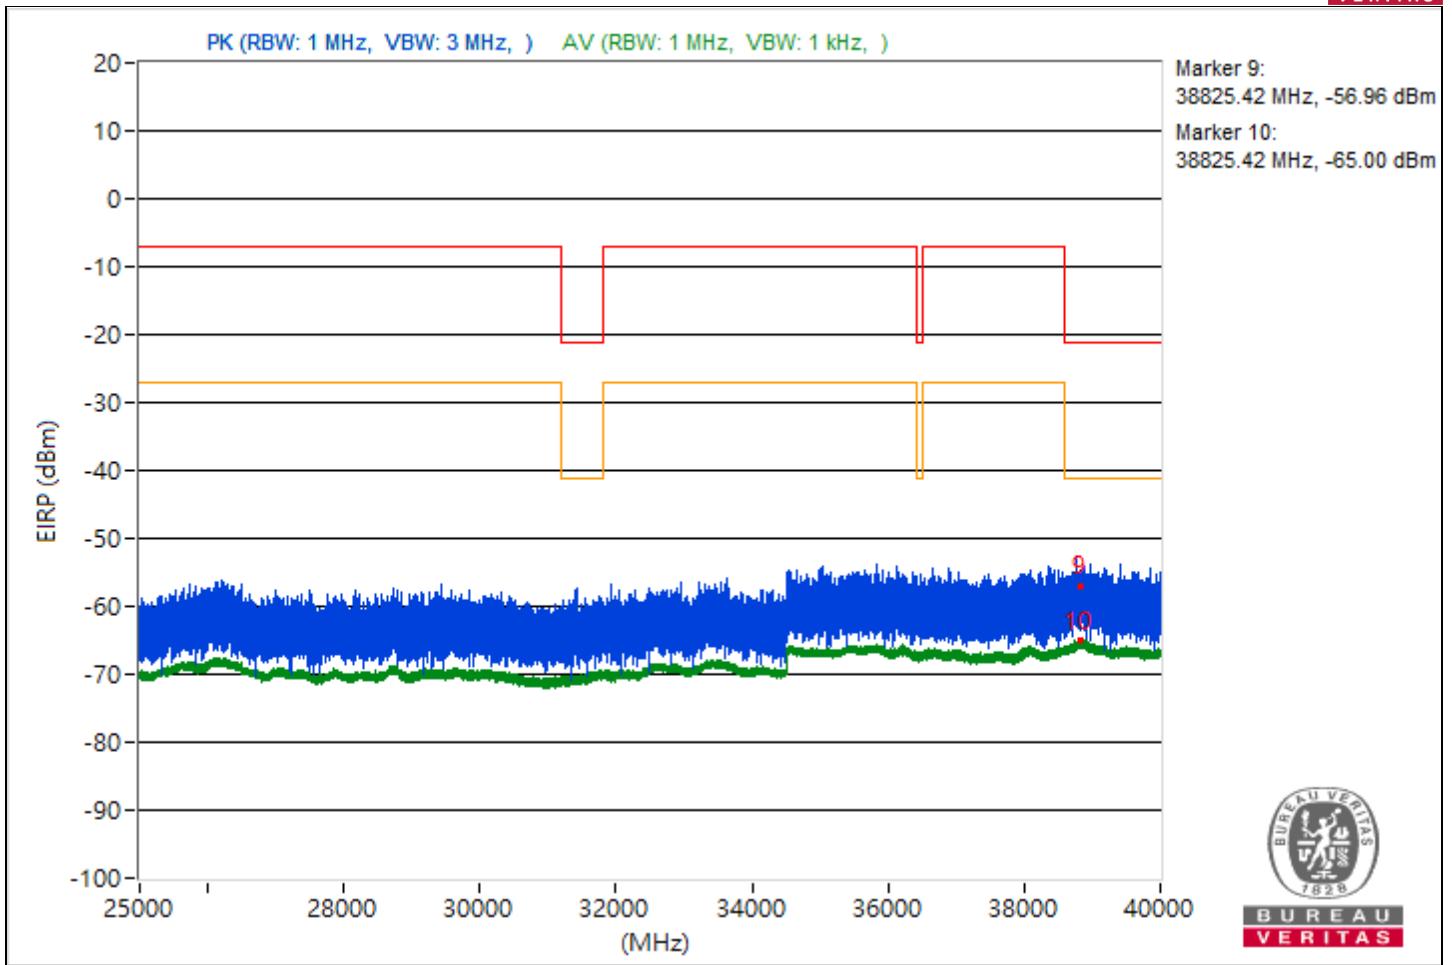


1S1T


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.1	41.58 PK	74	-32.42	-58.6	4.92	-53.68
2	3802.1	34.51 AV	54	-19.49	-65.67	4.92	-60.75
3	14485.42	41.18 PK	74	-32.82	-59	4.92	-54.08
4	14485.42	33.52 AV	54	-20.48	-66.66	4.92	-61.74
5	20824.5	44.23 PK	74	-29.77	-55.95	4.92	-51.03
6	20824.5	35.38 AV	54	-18.62	-64.8	4.92	-59.88
7	23648.1	45.54 PK	74	-28.46	-54.64	4.92	-49.72
8	23648.1	36.71 AV	54	-17.29	-63.47	4.92	-58.55
9	38851.29	38.19 PK	74	-35.81	-61.99	4.92	-57.07
10	38851.29	30.21 AV	54	-23.79	-69.97	4.92	-65.05

Note: Margin value = Emission Level - Limit value

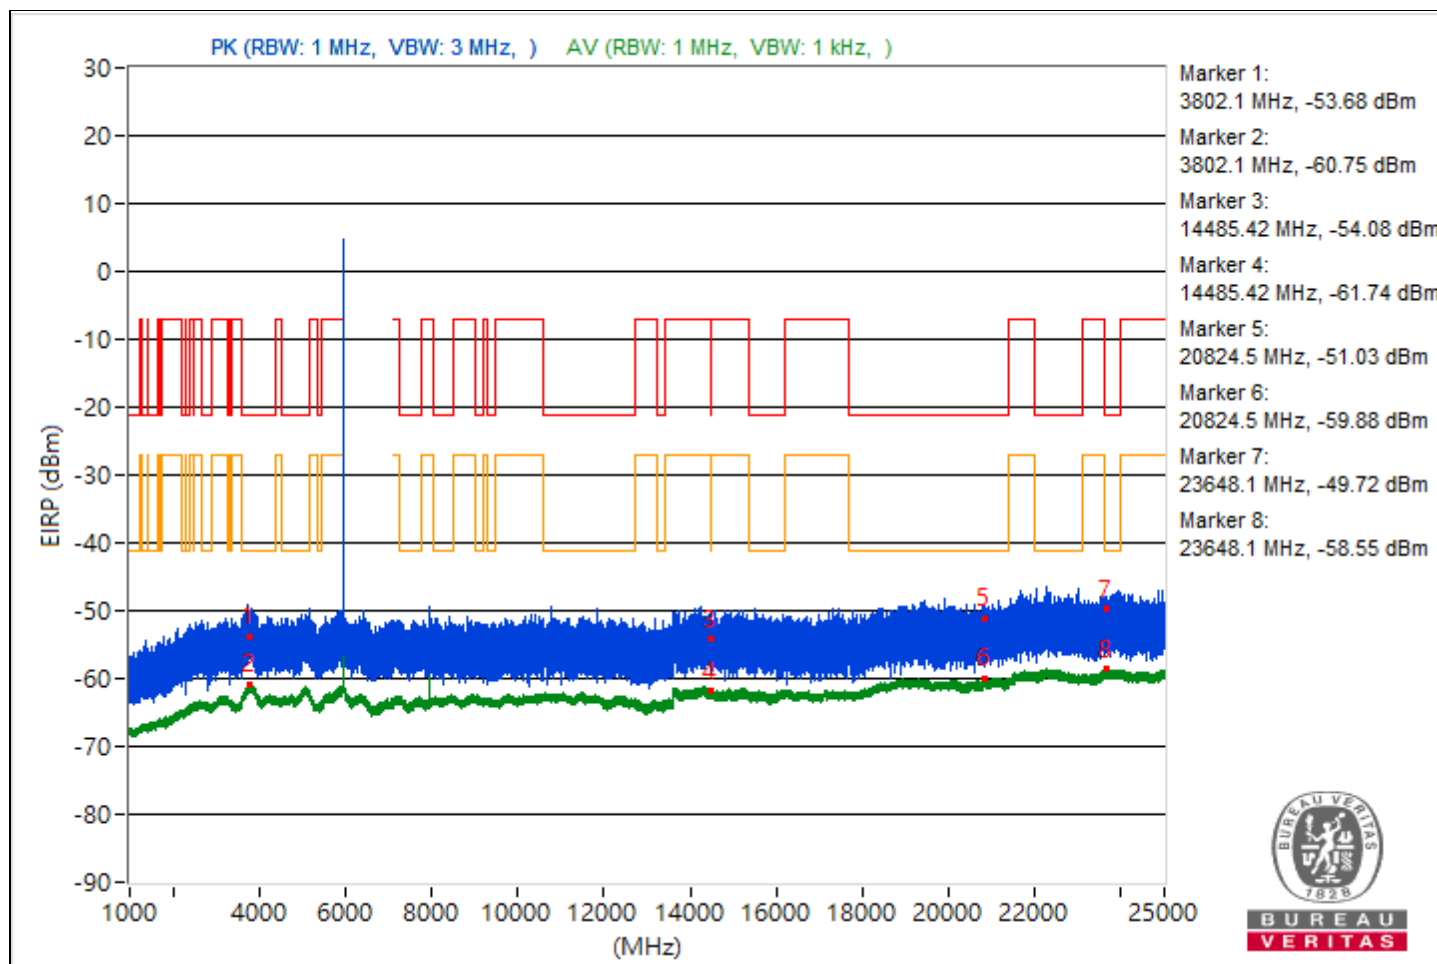


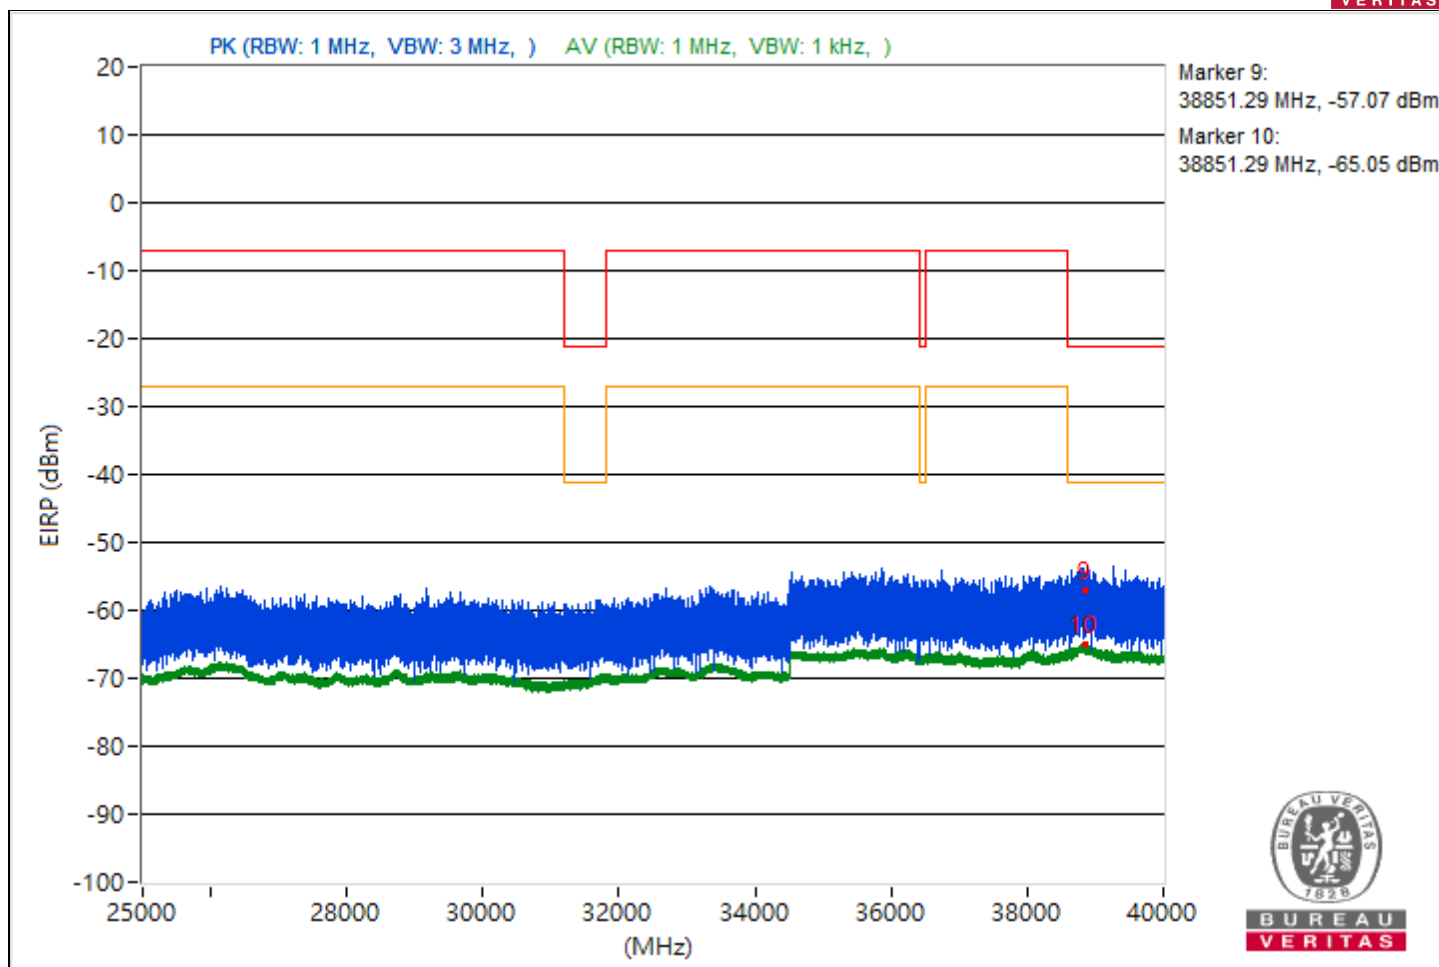


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.16	40.9 PK	74	-33.1	-59.28	4.92	-54.36
2	3821.16	34.32 AV	54	-19.68	-65.86	4.92	-60.94
3	8233.42	44.25 PK	74	-29.75	-55.93	4.92	-51.01
4	8233.42	41.28 AV	54	-12.72	-58.9	4.92	-53.98
5	21399.9	43.97 PK	74	-30.03	-56.21	4.92	-51.29
6	21399.9	35.37 AV	54	-18.63	-64.81	4.92	-59.89
7	23906.5	43.95 PK	74	-30.05	-56.23	4.92	-51.31
8	23906.5	36.72 AV	54	-17.28	-63.46	4.92	-58.54
9	38841.51	38.47 PK	74	-35.53	-61.71	4.92	-56.79
10	38841.51	30.32 AV	54	-23.68	-69.86	4.92	-64.94

Note: Margin value = Emission Level - Limit value

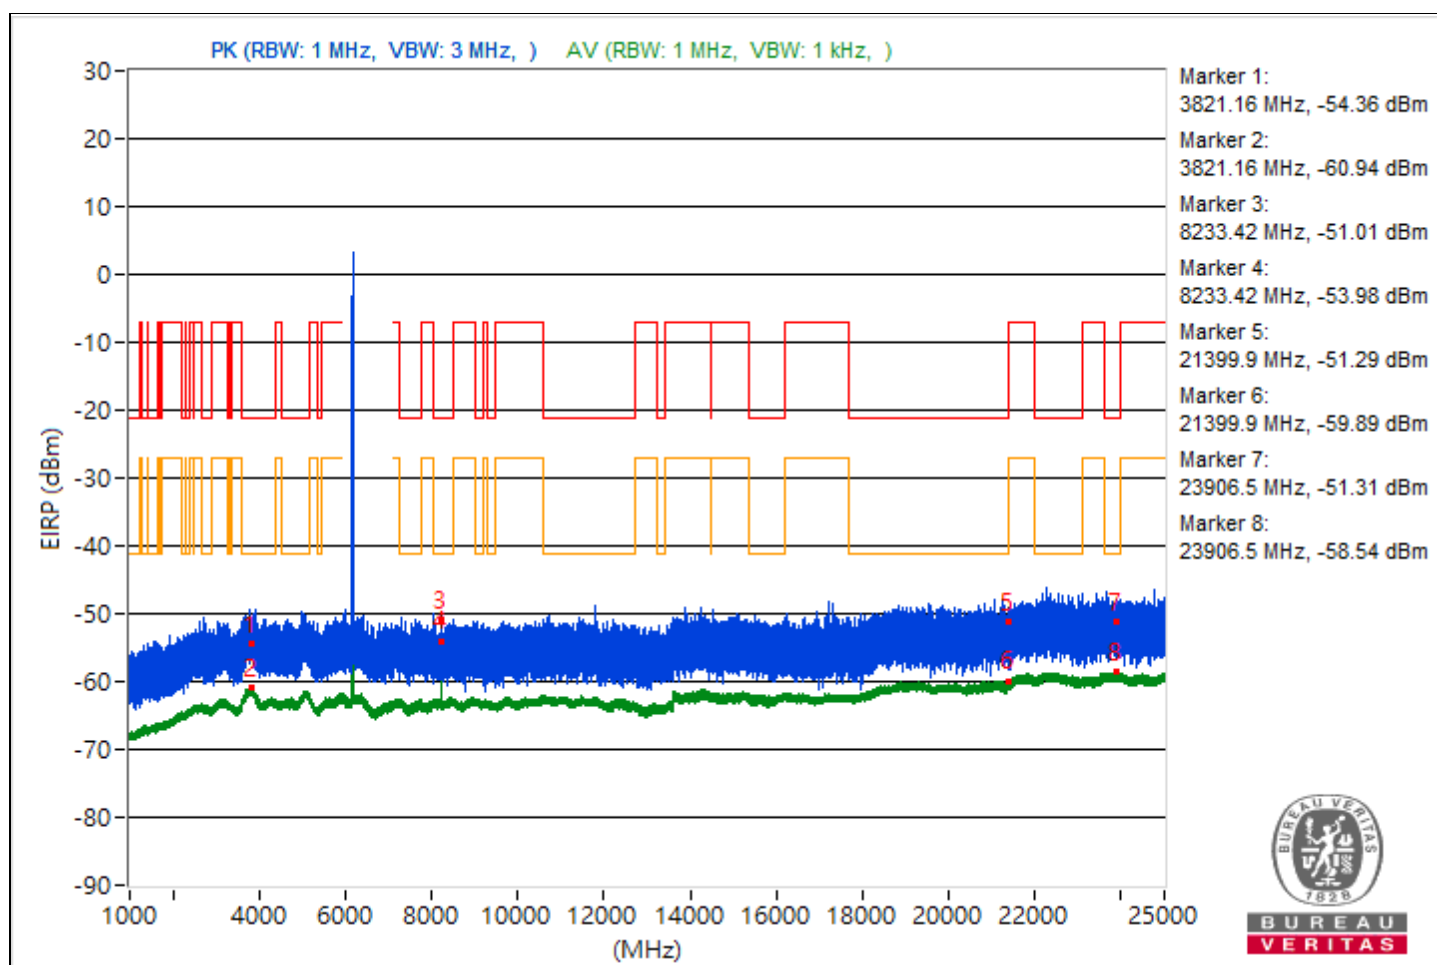


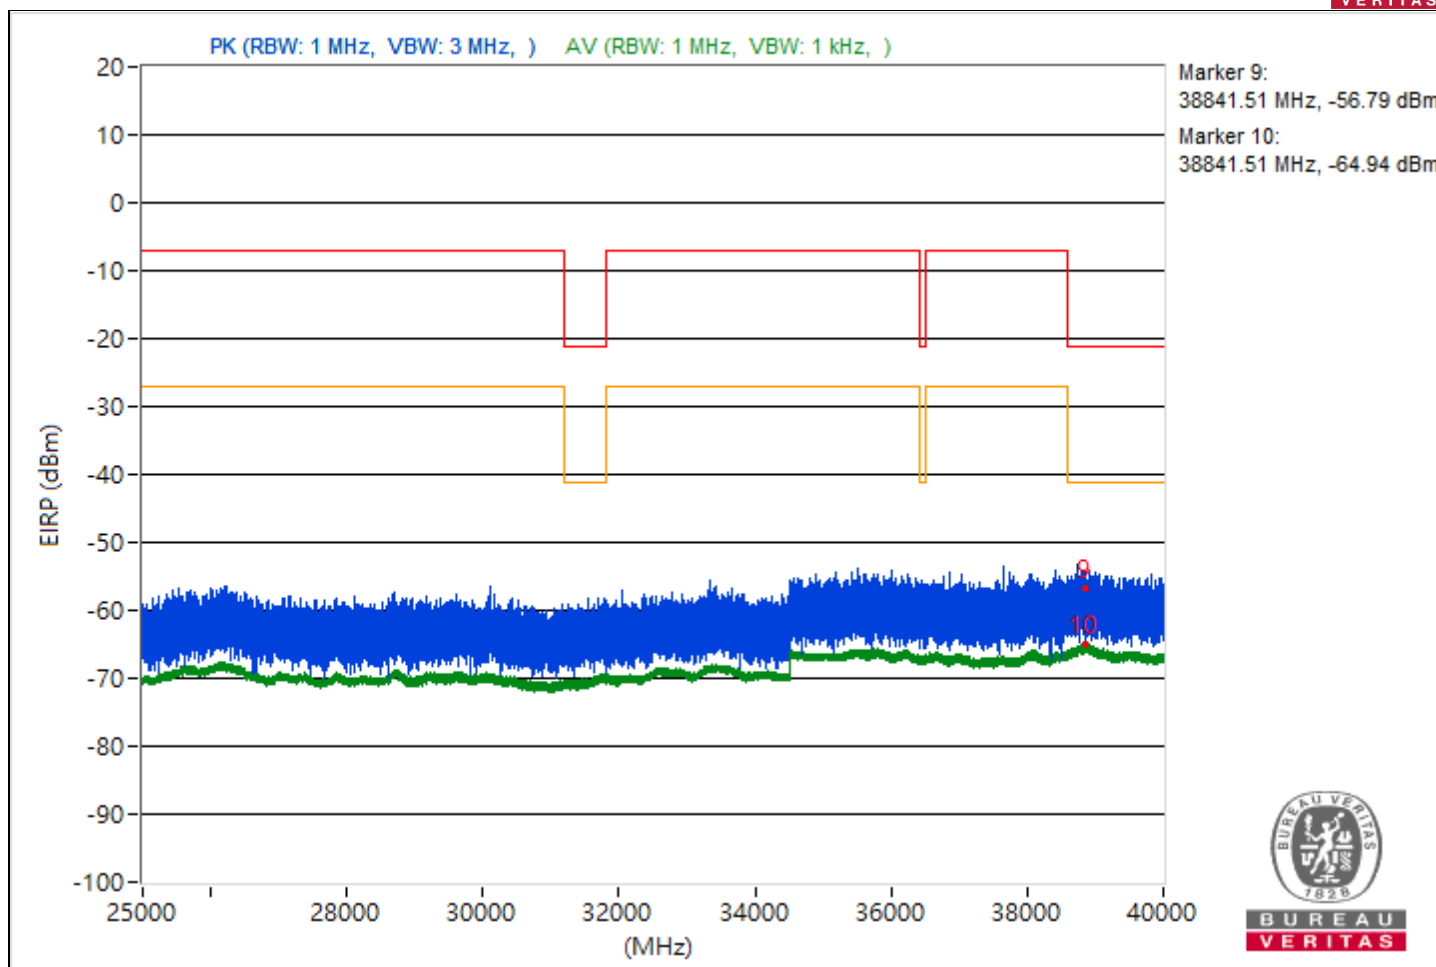


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3781.96	42.11 PK	74	-31.89	-58.07	4.92	-53.15
2	3781.96	34.47 AV	54	-19.53	-65.71	4.92	-60.79
3	14470.04	41.8 PK	74	-32.2	-58.38	4.92	-53.46
4	14470.04	33.54 AV	54	-20.46	-66.64	4.92	-61.72
5	21077.2	44.57 PK	74	-29.43	-55.61	4.92	-50.69
6	21077.2	35.41 AV	54	-18.59	-64.77	4.92	-59.85
7	23786	42.67 PK	74	-31.33	-57.51	4.92	-52.59
8	23786	36.64 AV	54	-17.36	-63.54	4.92	-58.62
9	38836.36	38.35 PK	74	-35.65	-61.83	4.92	-56.91
10	38836.36	30.28 AV	54	-23.72	-69.9	4.92	-64.98

Note: Margin value = Emission Level - Limit value

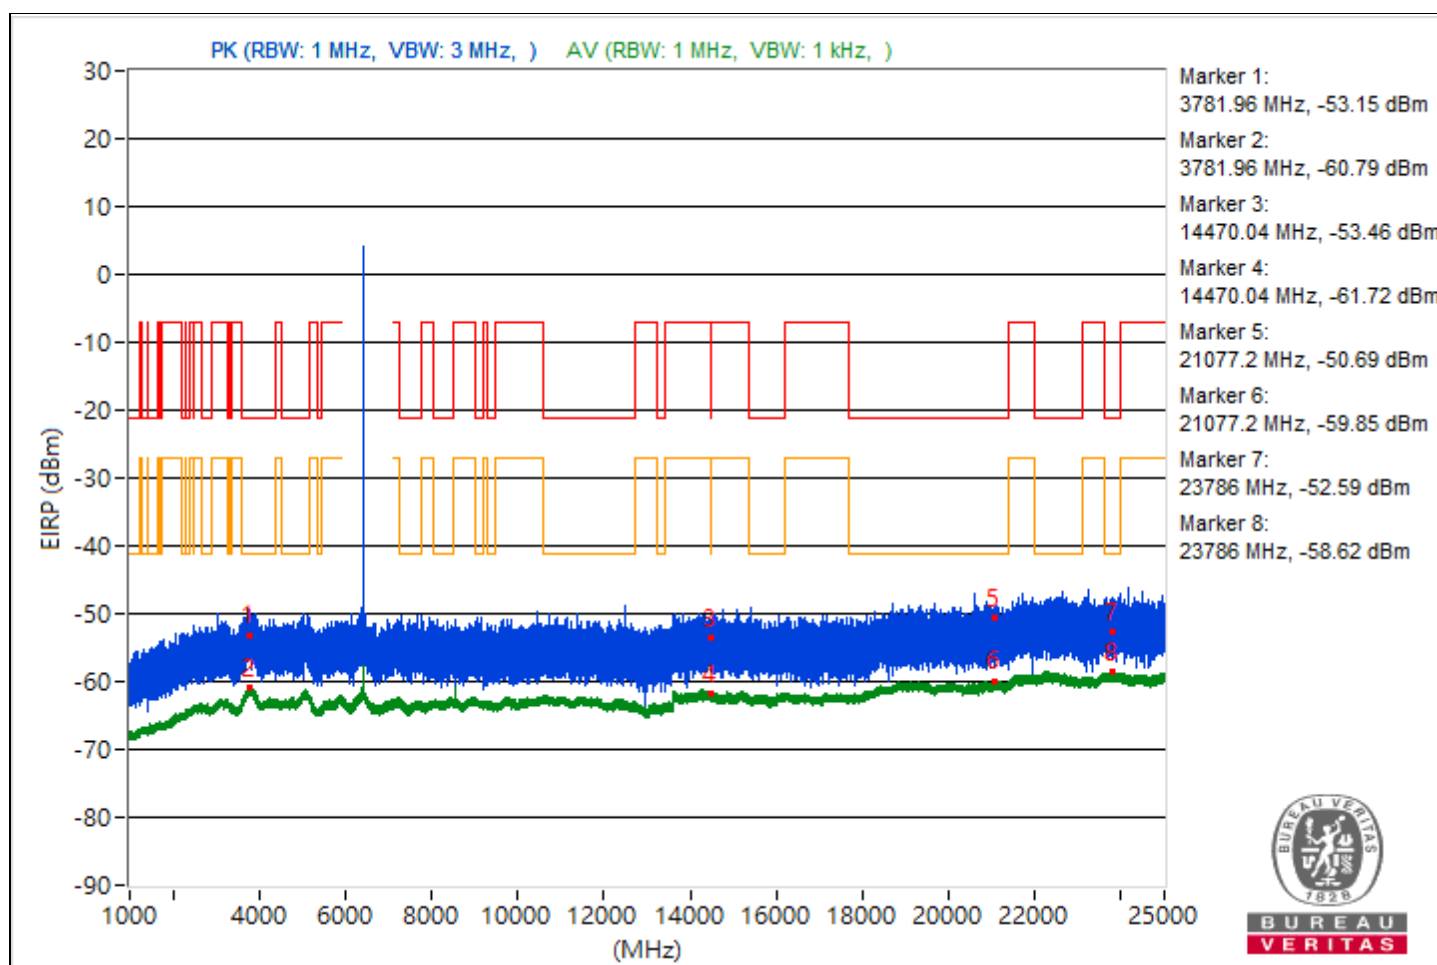


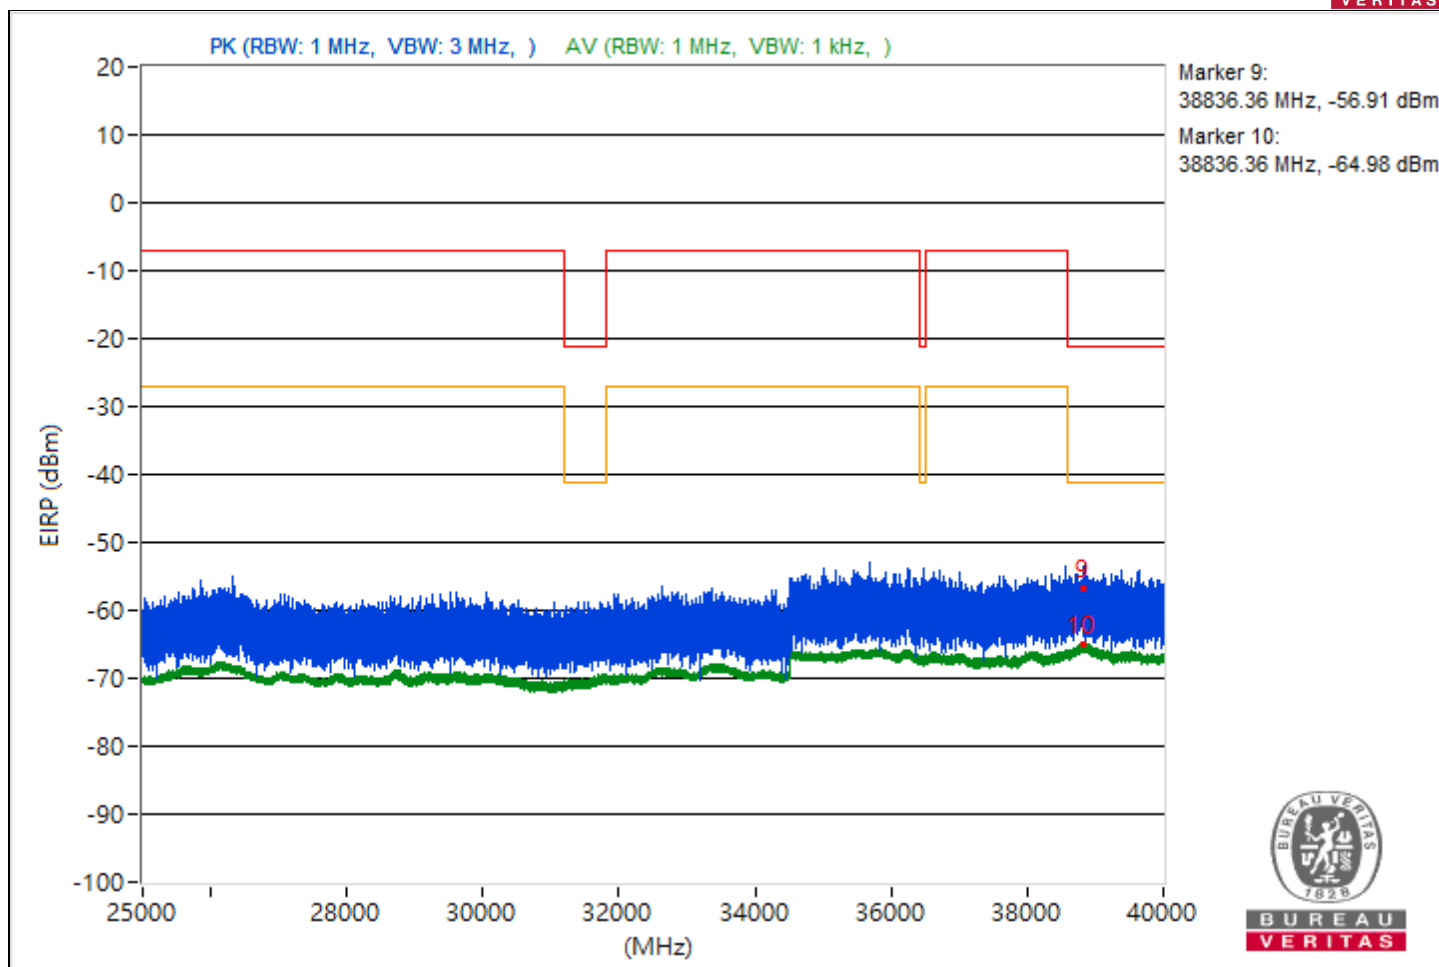


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3799.77	42.92 PK	74	-31.08	-57.26	4.92	-52.34
2	3799.77	34.33 AV	54	-19.67	-65.85	4.92	-60.93
3	14490.84	39.43 PK	74	-34.57	-60.75	4.92	-55.83
4	14490.84	33.66 AV	54	-20.34	-66.52	4.92	-61.6
5	21152	42.11 PK	74	-31.89	-58.07	4.92	-53.15
6	21152	35.43 AV	54	-18.57	-64.75	4.92	-59.83
7	23651.1	44.34 PK	74	-29.66	-55.84	4.92	-50.92
8	23651.1	36.69 AV	54	-17.31	-63.49	4.92	-58.57
9	38856.89	37.05 PK	74	-36.95	-63.13	4.92	-58.21
10	38856.89	30.31 AV	54	-23.69	-69.87	4.92	-64.95

Note: Margin value = Emission Level - Limit value

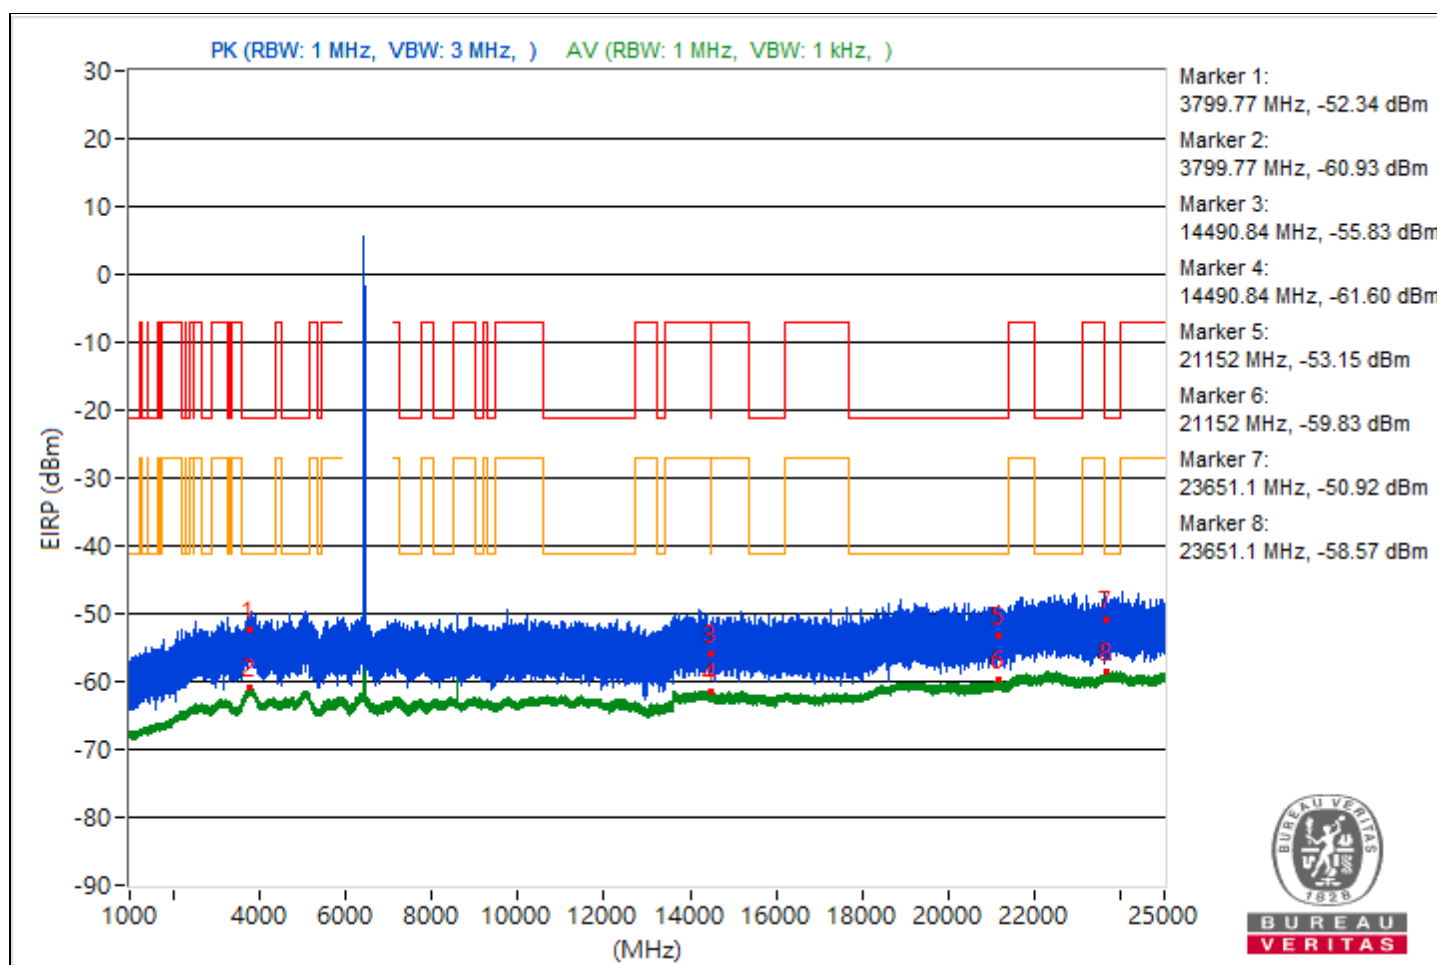


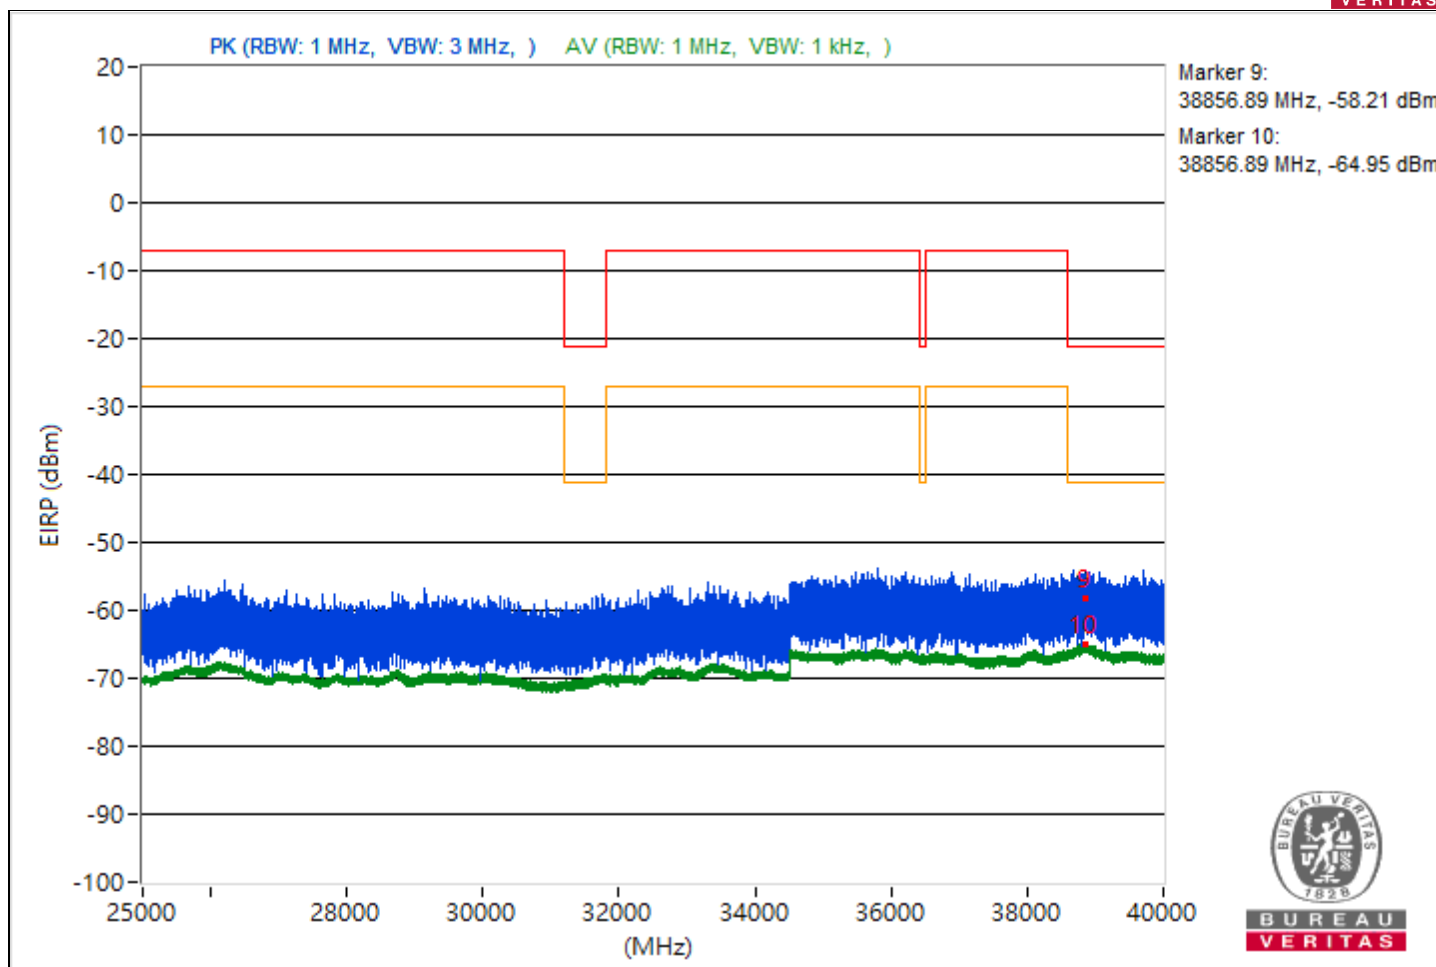


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3832.2	42.84 PK	74	-31.16	-57.34	4.92	-52.42
2	3832.2	34.63 AV	54	-19.37	-65.55	4.92	-60.63
3	14476.27	39.68 PK	74	-34.32	-60.5	4.92	-55.58
4	14476.27	33.59 AV	54	-20.41	-66.59	4.92	-61.67
5	21194.5	42.75 PK	74	-31.25	-57.43	4.92	-52.51
6	21194.5	35.41 AV	54	-18.59	-64.77	4.92	-59.85
7	22271.7	41.21 PK	74	-32.79	-58.97	4.92	-54.05
8	22271.7	36.88 AV	54	-17.12	-63.3	4.92	-58.38
9	38807.73	35.45 PK	74	-38.55	-64.73	4.92	-59.81
10	38807.73	30.25 AV	54	-23.75	-69.93	4.92	-65.01

Note: Margin value = Emission Level - Limit value

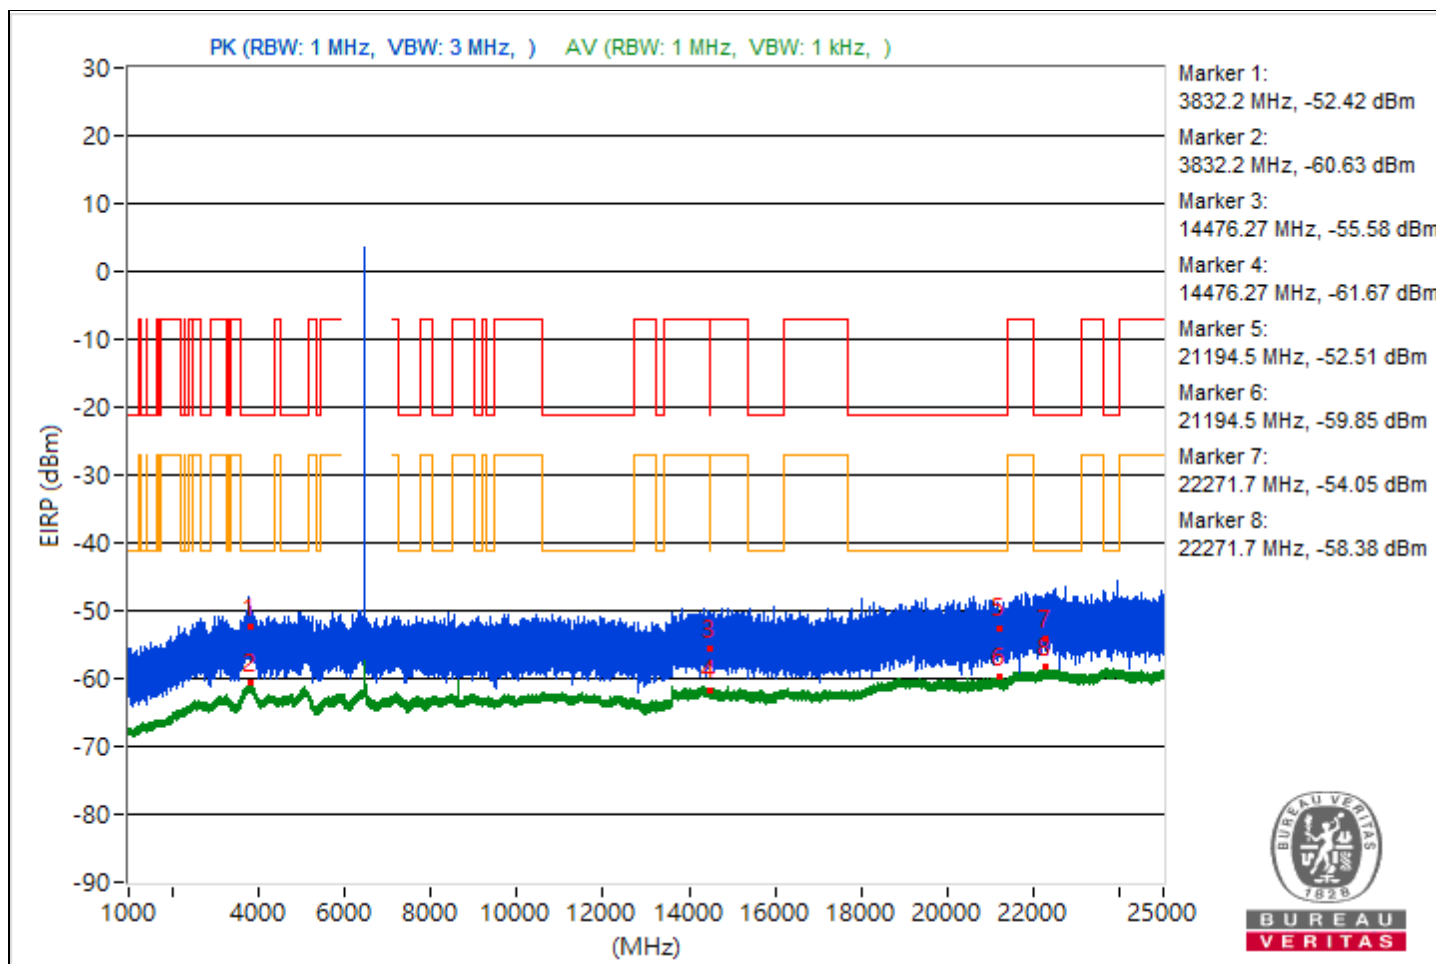


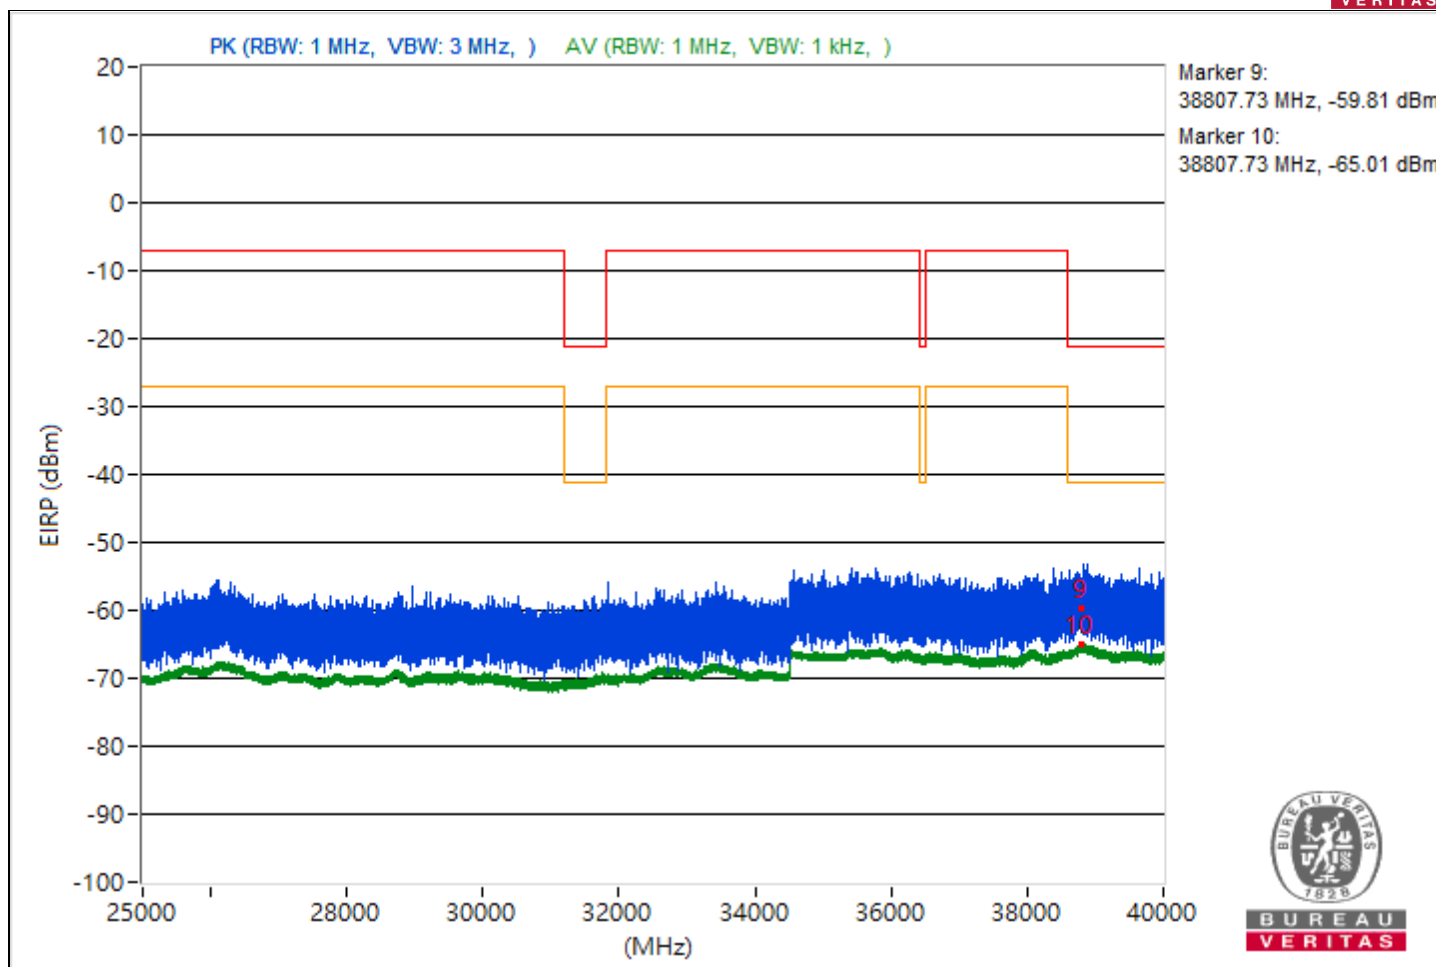


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.24	39.63 PK	74	-34.37	-60.55	4.92	-55.63
2	3808.24	34.49 AV	54	-19.51	-65.69	4.92	-60.77
3	14499.91	39.19 PK	74	-34.81	-60.99	4.92	-56.07
4	14499.91	33.81 AV	54	-20.19	-66.37	4.92	-61.45
5	21140.8	40.8 PK	74	-33.2	-59.38	4.92	-54.46
6	21140.8	35.48 AV	54	-18.52	-64.7	4.92	-59.78
7	23863.8	44.5 PK	74	-29.5	-55.68	4.92	-50.76
8	23863.8	36.76 AV	54	-17.24	-63.42	4.92	-58.5
9	38802.84	36 PK	74	-38	-64.18	4.92	-59.26
10	38802.84	30.58 AV	54	-23.42	-69.6	4.92	-64.68

Note: Margin value = Emission Level - Limit value

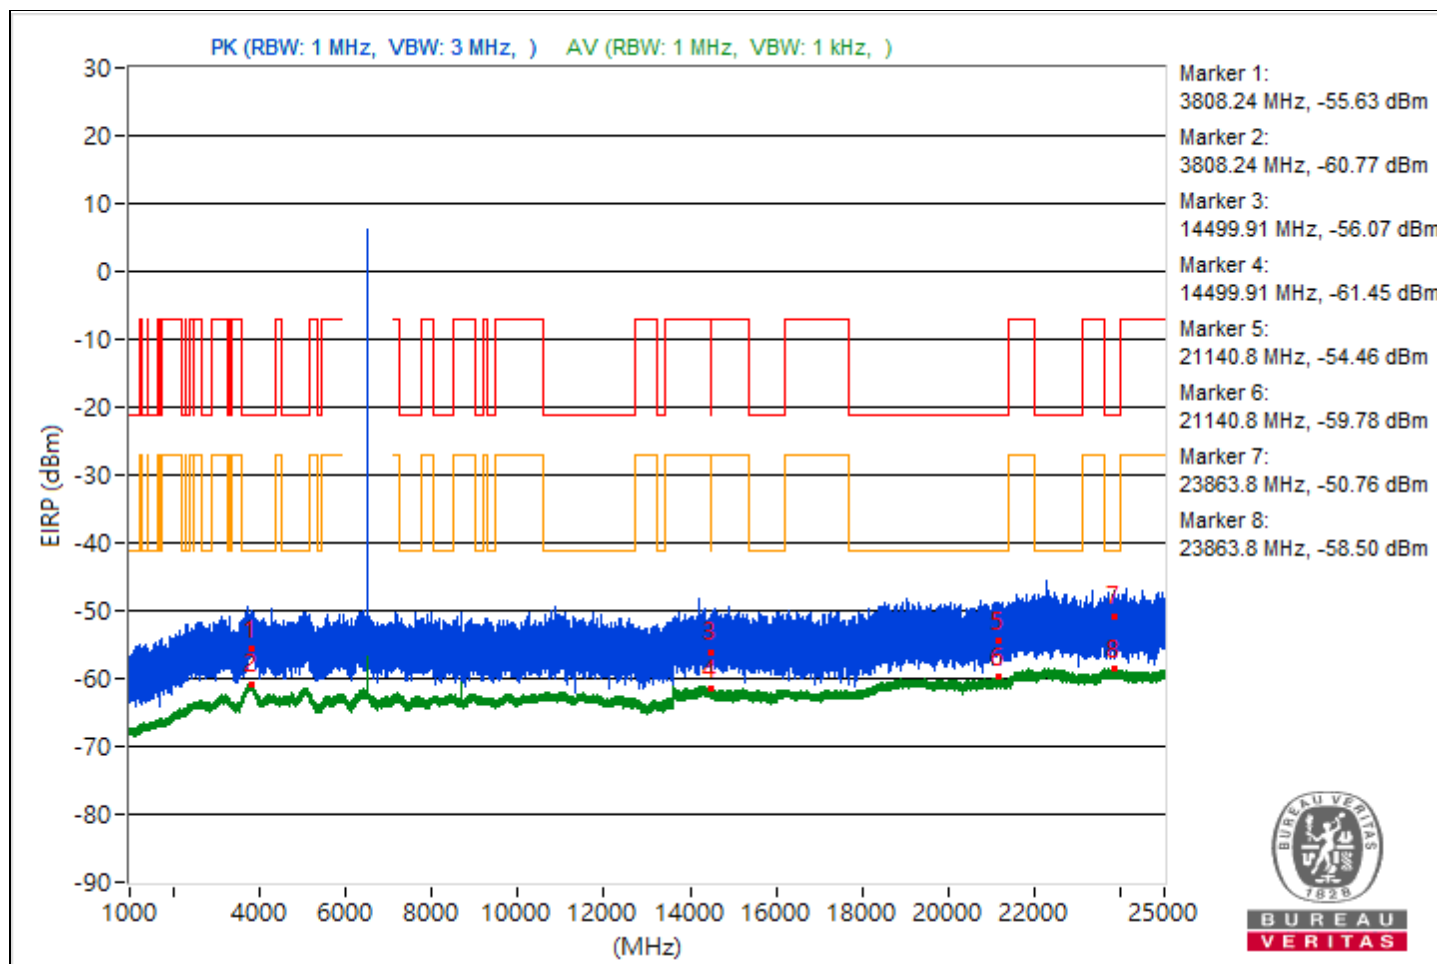


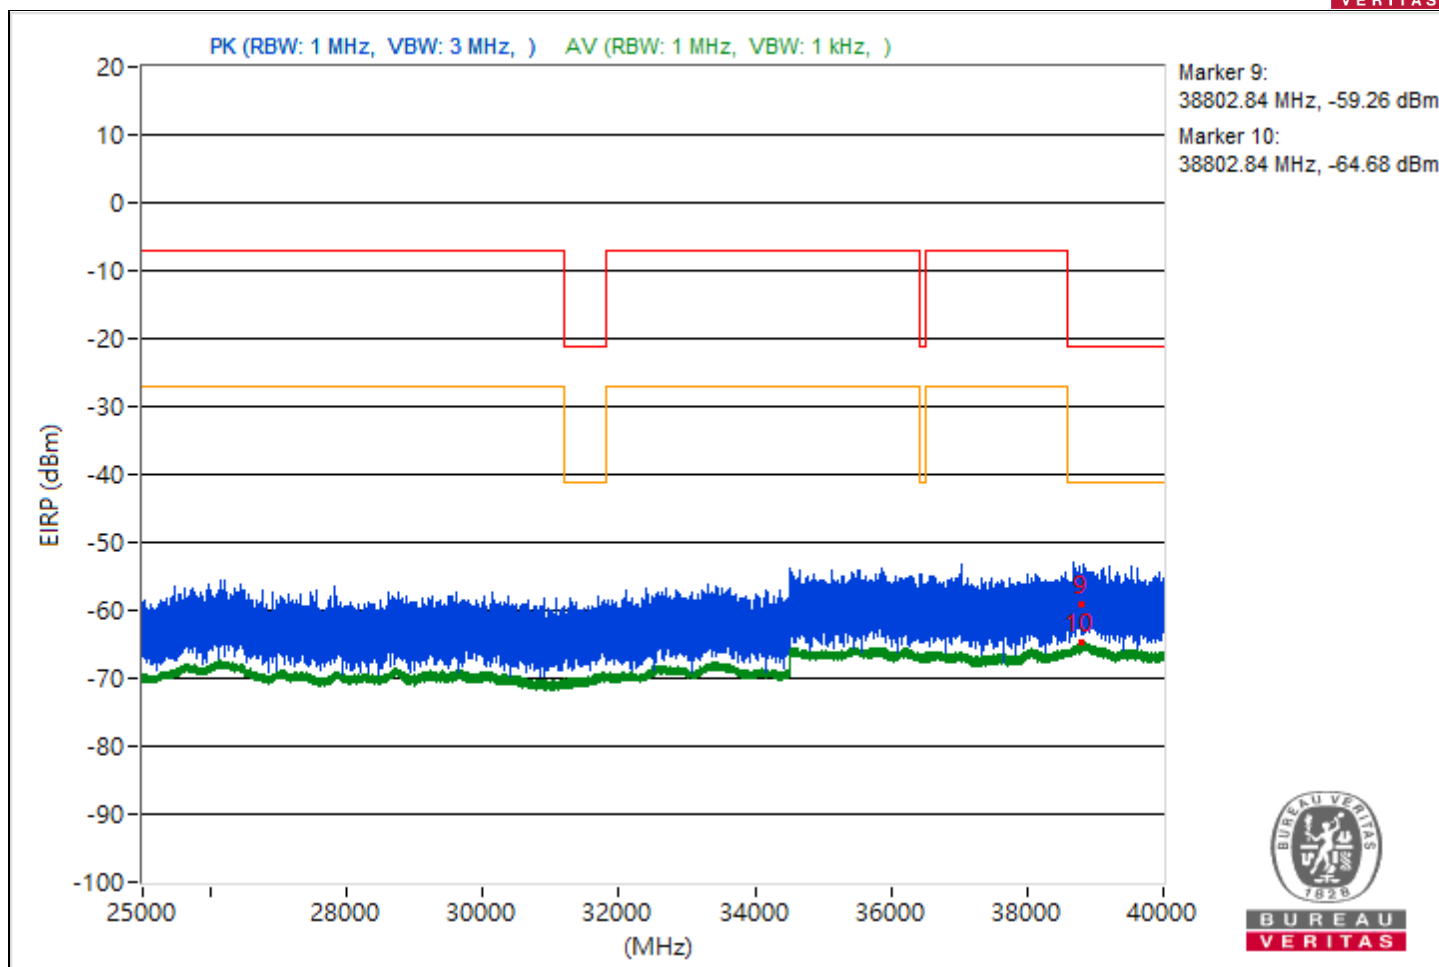


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.9	42.14 PK	74	-31.86	-58.04	4.92	-53.12
2	3825.9	34.5 AV	54	-19.5	-65.68	4.92	-60.76
3	14492.8	40.71 PK	74	-33.29	-59.47	4.92	-54.55
4	14492.8	33.65 AV	54	-20.35	-66.53	4.92	-61.61
5	21118.1	41 PK	74	-33	-59.18	4.92	-54.26
6	21118.1	35.64 AV	54	-18.36	-64.54	4.92	-59.62
7	22265.5	41.96 PK	74	-32.04	-58.22	4.92	-53.3
8	22265.5	36.82 AV	54	-17.18	-63.36	4.92	-58.44
9	38798.67	37.19 PK	74	-36.81	-62.99	4.92	-58.07
10	38798.67	30.64 AV	54	-23.36	-69.54	4.92	-64.62

Note: Margin value = Emission Level - Limit value

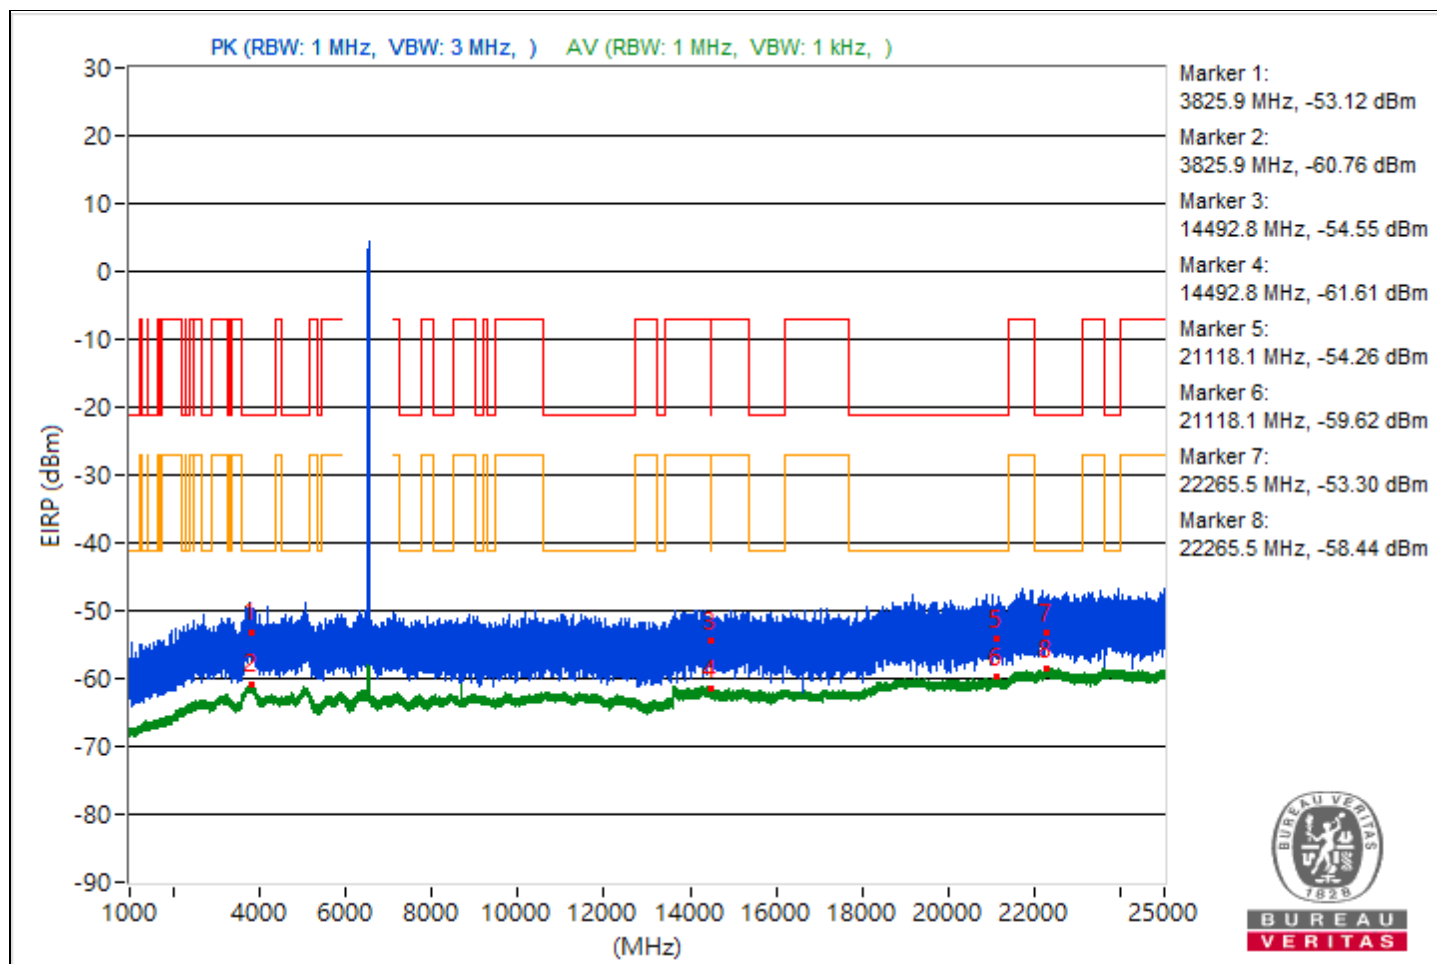


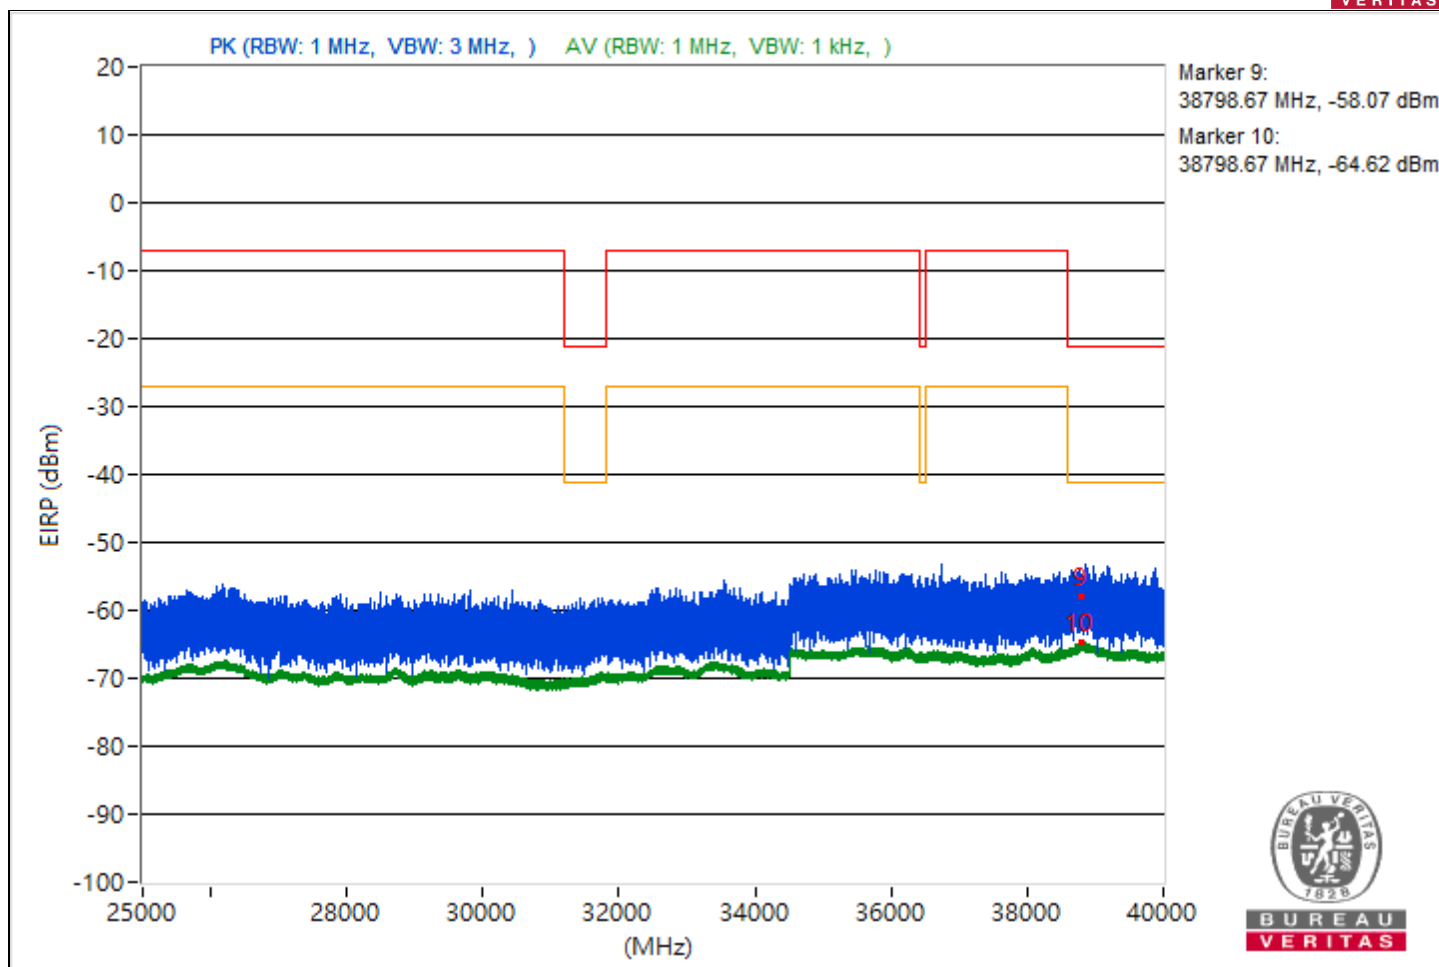


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.07	41.77 PK	74	-32.23	-58.41	4.92	-53.49
2	3813.07	34.54 AV	54	-19.46	-65.64	4.92	-60.72
3	14488.62	42.65 PK	74	-31.35	-57.53	4.92	-52.61
4	14488.62	33.72 AV	54	-20.28	-66.46	4.92	-61.54
5	21153.7	41.56 PK	74	-32.44	-58.62	4.92	-53.7
6	21153.7	35.53 AV	54	-18.47	-64.65	4.92	-59.73
7	23719.8	46.3 PK	74	-27.7	-53.88	4.92	-48.96
8	23719.8	36.73 AV	54	-17.27	-63.45	4.92	-58.53
9	38847.2	34.88 PK	74	-39.12	-65.3	4.92	-60.38
10	38847.2	30.68 AV	54	-23.32	-69.5	4.92	-64.58

Note: Margin value = Emission Level - Limit value

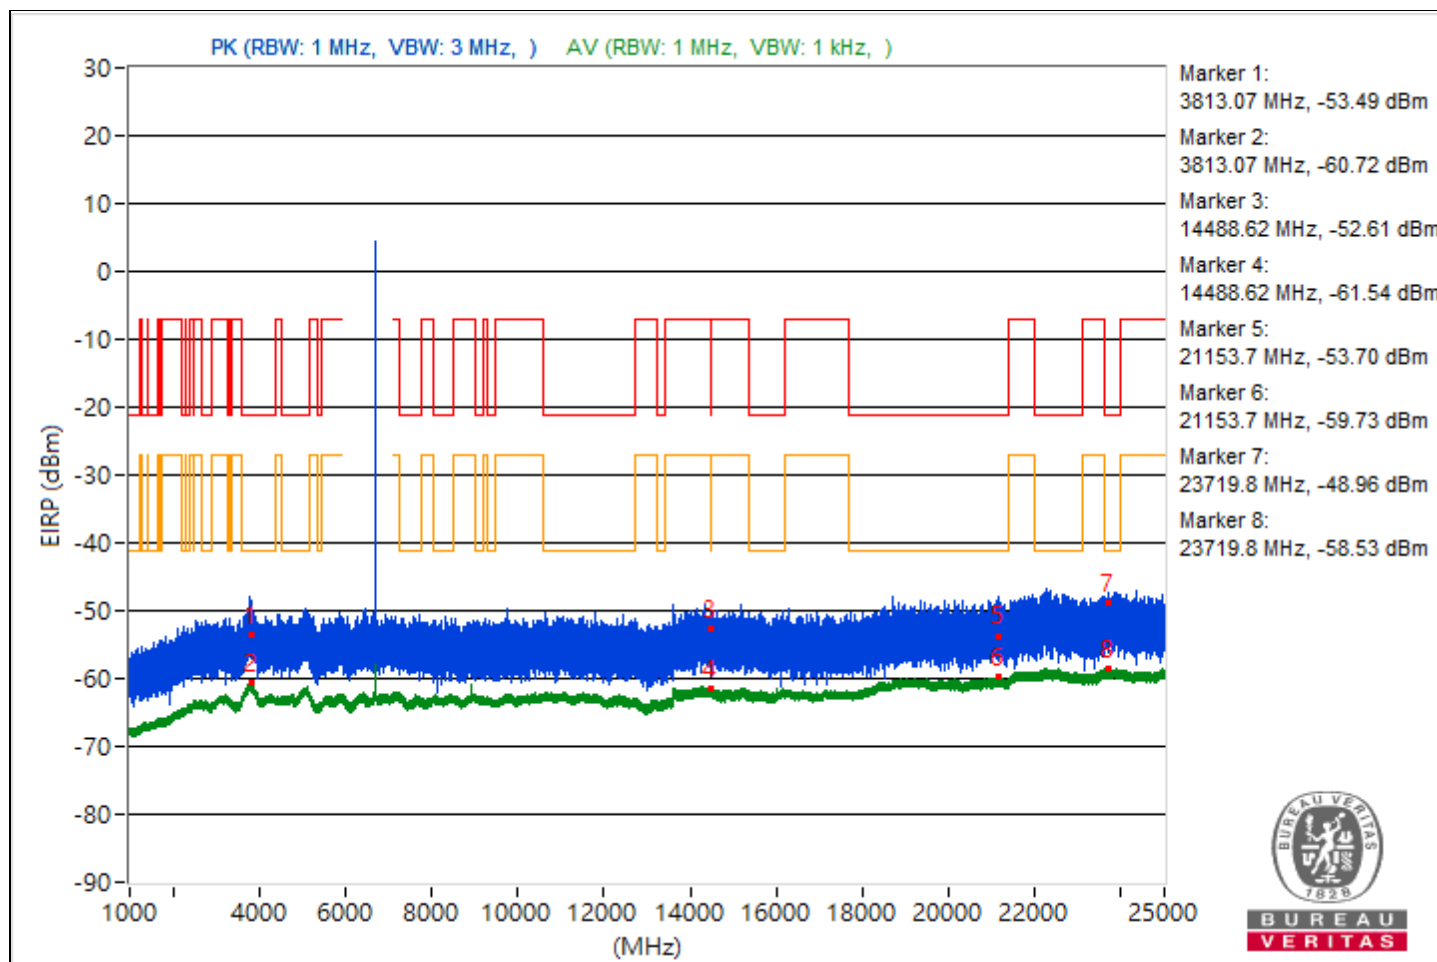


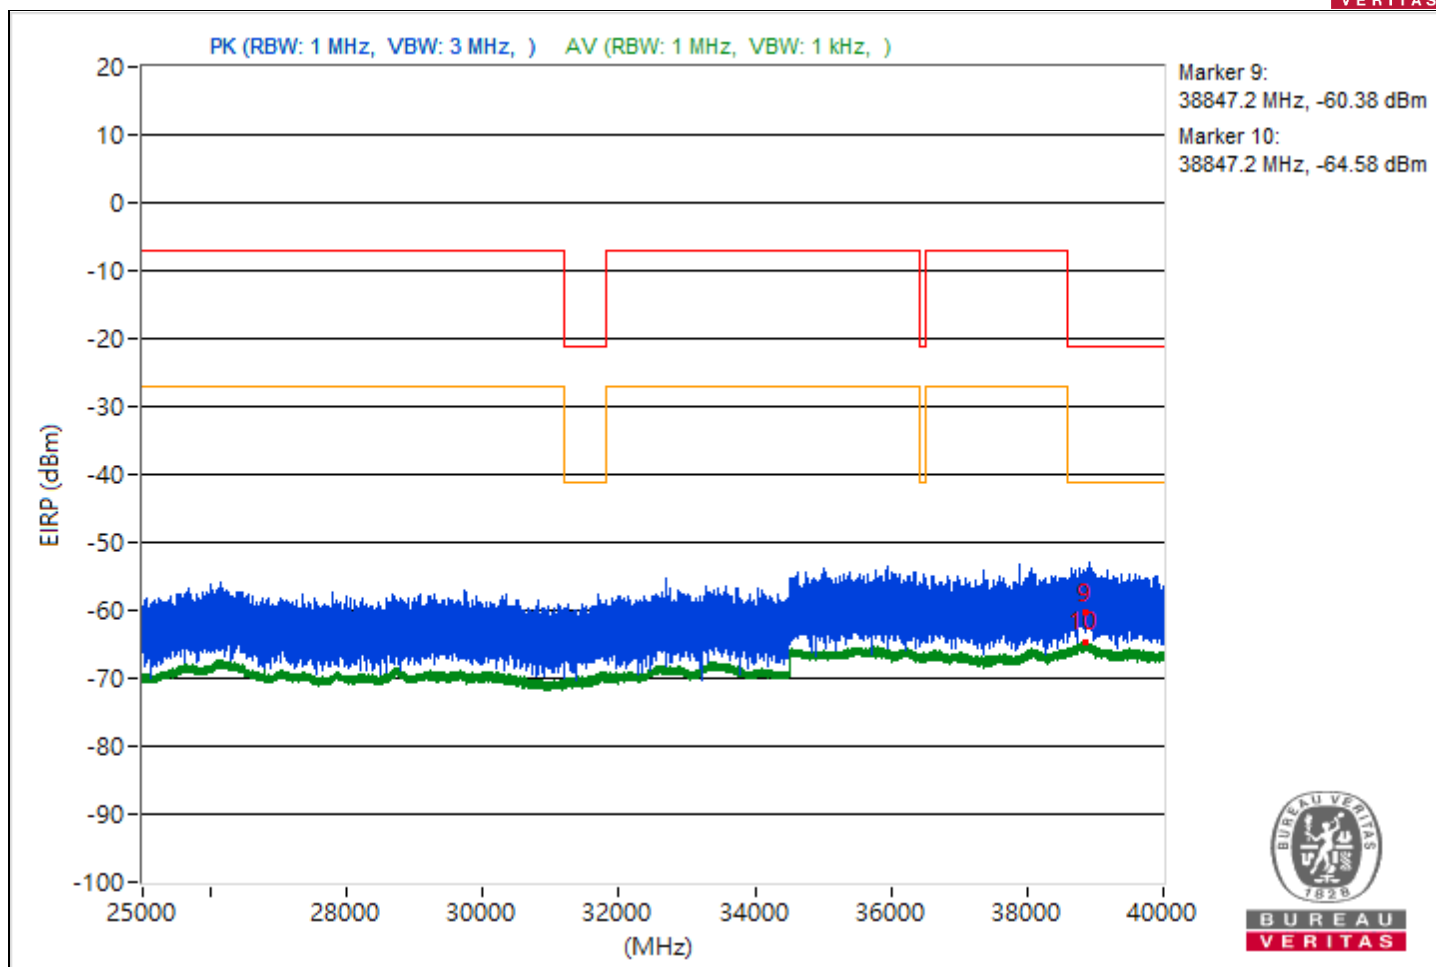


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3830.26	41.57 PK	74	-32.43	-58.61	4.92	-53.69
2	3830.26	34.59 AV	54	-19.41	-65.59	4.92	-60.67
3	14476.36	39.98 PK	74	-34.02	-60.2	4.92	-55.28
4	14476.36	33.72 AV	54	-20.28	-66.46	4.92	-61.54
5	21112.1	41.5 PK	74	-32.5	-58.68	4.92	-53.76
6	21112.1	35.41 AV	54	-18.59	-64.77	4.92	-59.85
7	23655.1	42.26 PK	74	-31.74	-57.92	4.92	-53.00
8	23655.1	36.84 AV	54	-17.16	-63.34	4.92	-58.42
9	38786.31	35.97 PK	74	-38.03	-64.21	4.92	-59.29
10	38786.31	30.58 AV	54	-23.42	-69.6	4.92	-64.68

Note: Margin value = Emission Level - Limit value

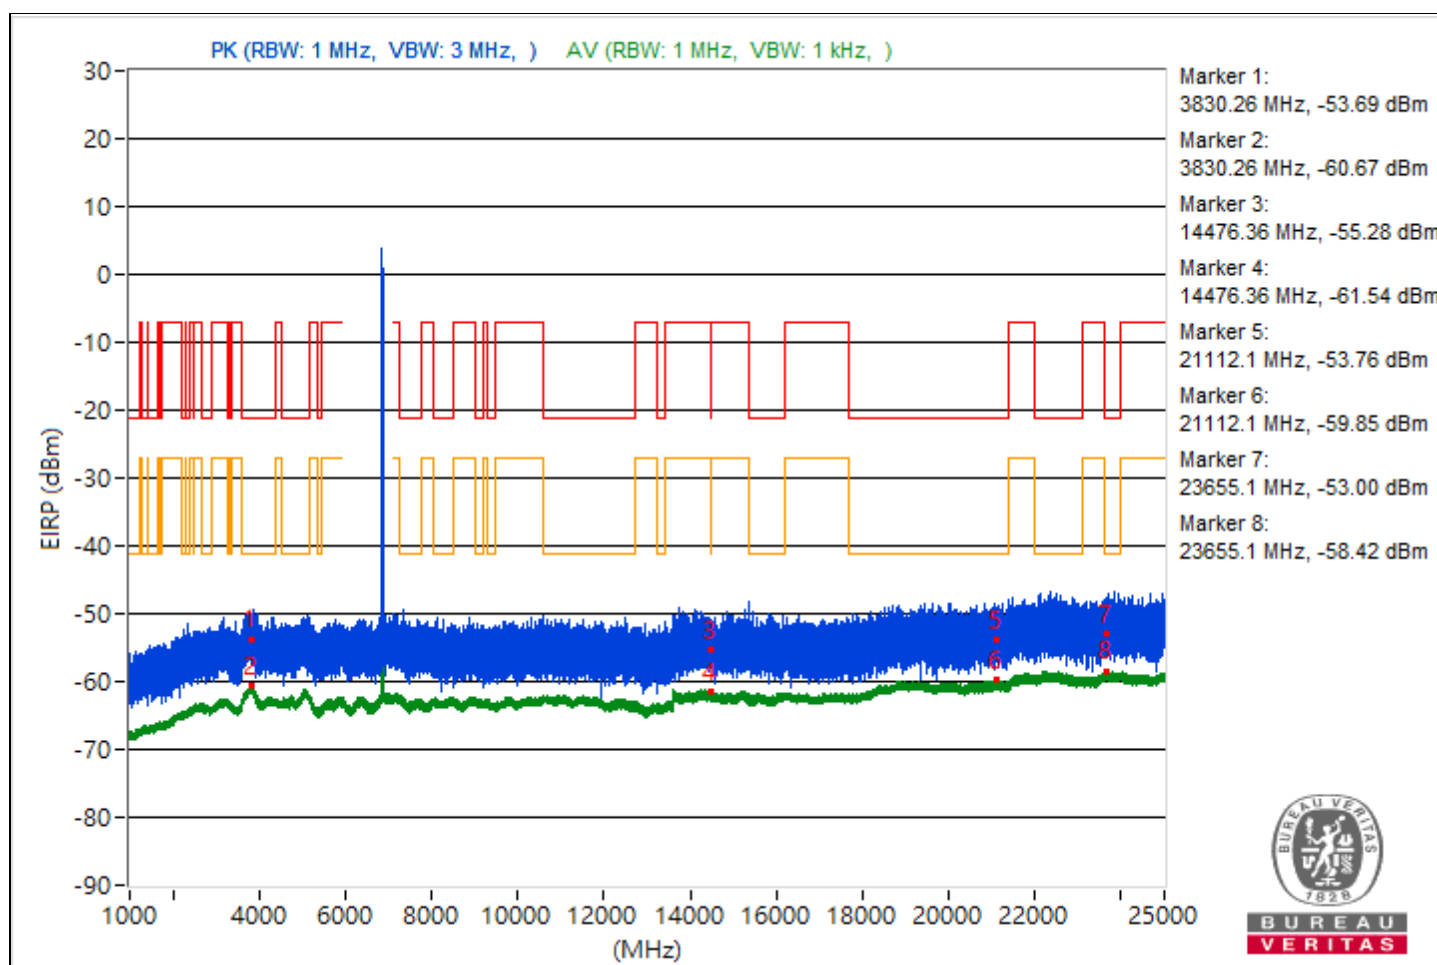


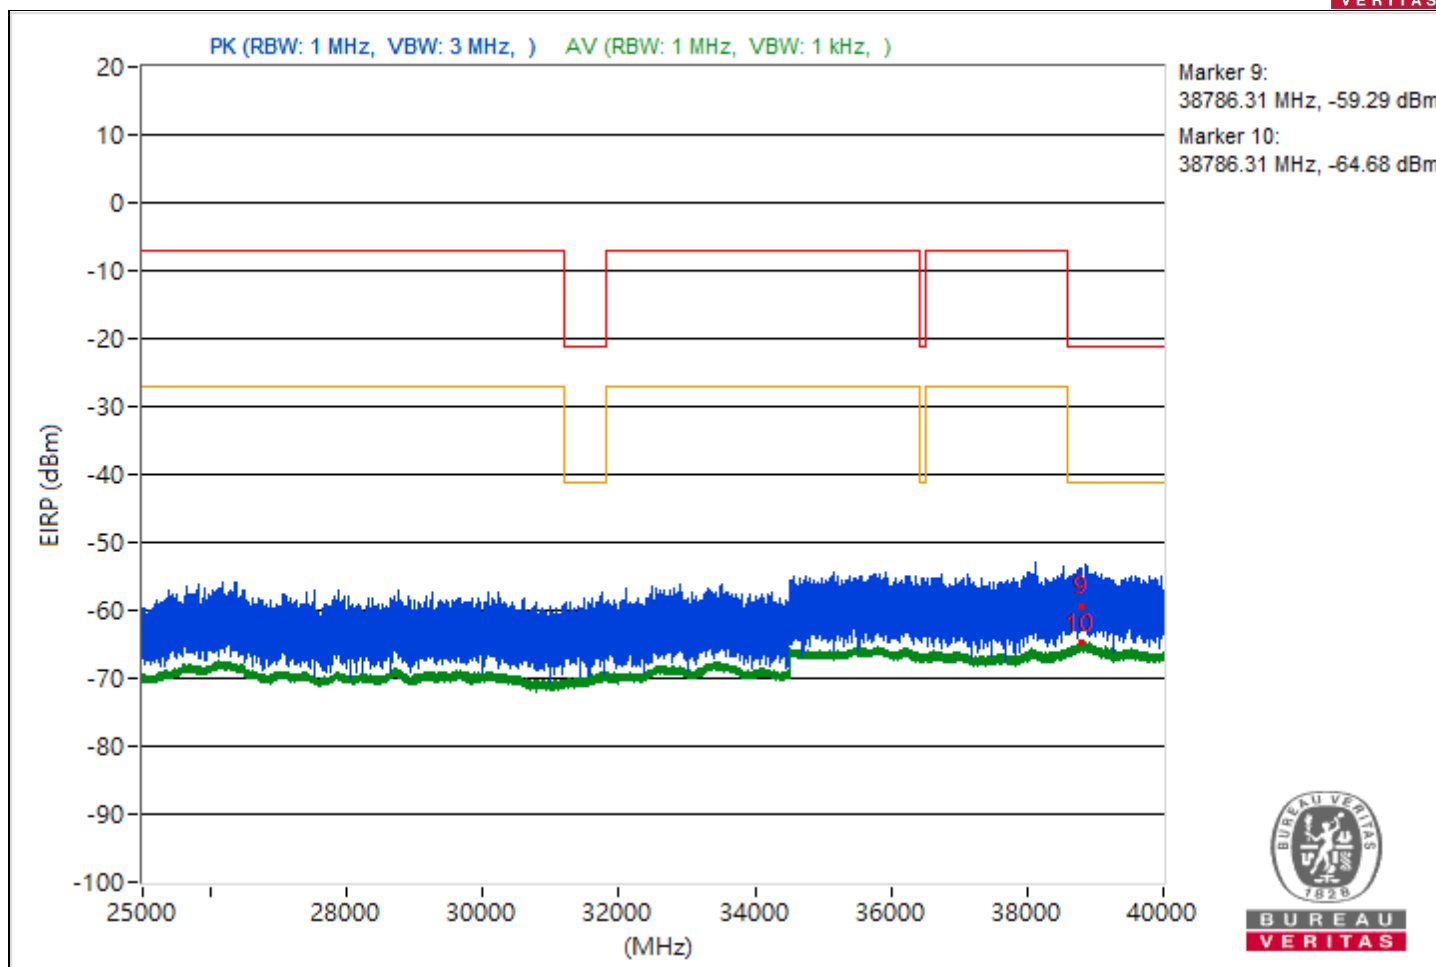


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3833.52	41.75 PK	74	-32.25	-58.43	4.92	-53.51
2	3833.52	34.51 AV	54	-19.49	-65.67	4.92	-60.75
3	14480.62	43 PK	74	-31	-57.18	4.92	-52.26
4	14480.62	33.62 AV	54	-20.38	-66.56	4.92	-61.64
5	21130.8	43.58 PK	74	-30.42	-56.6	4.92	-51.68
6	21130.8	35.48 AV	54	-18.52	-64.7	4.92	-59.78
7	23747	43.78 PK	74	-30.22	-56.4	4.92	-51.48
8	23747	36.75 AV	54	-17.25	-63.43	4.92	-58.51
9	38861.42	34.71 PK	74	-39.29	-65.47	4.92	-60.55
10	38861.42	30.64 AV	54	-23.36	-69.54	4.92	-64.62

Note: Margin value = Emission Level - Limit value

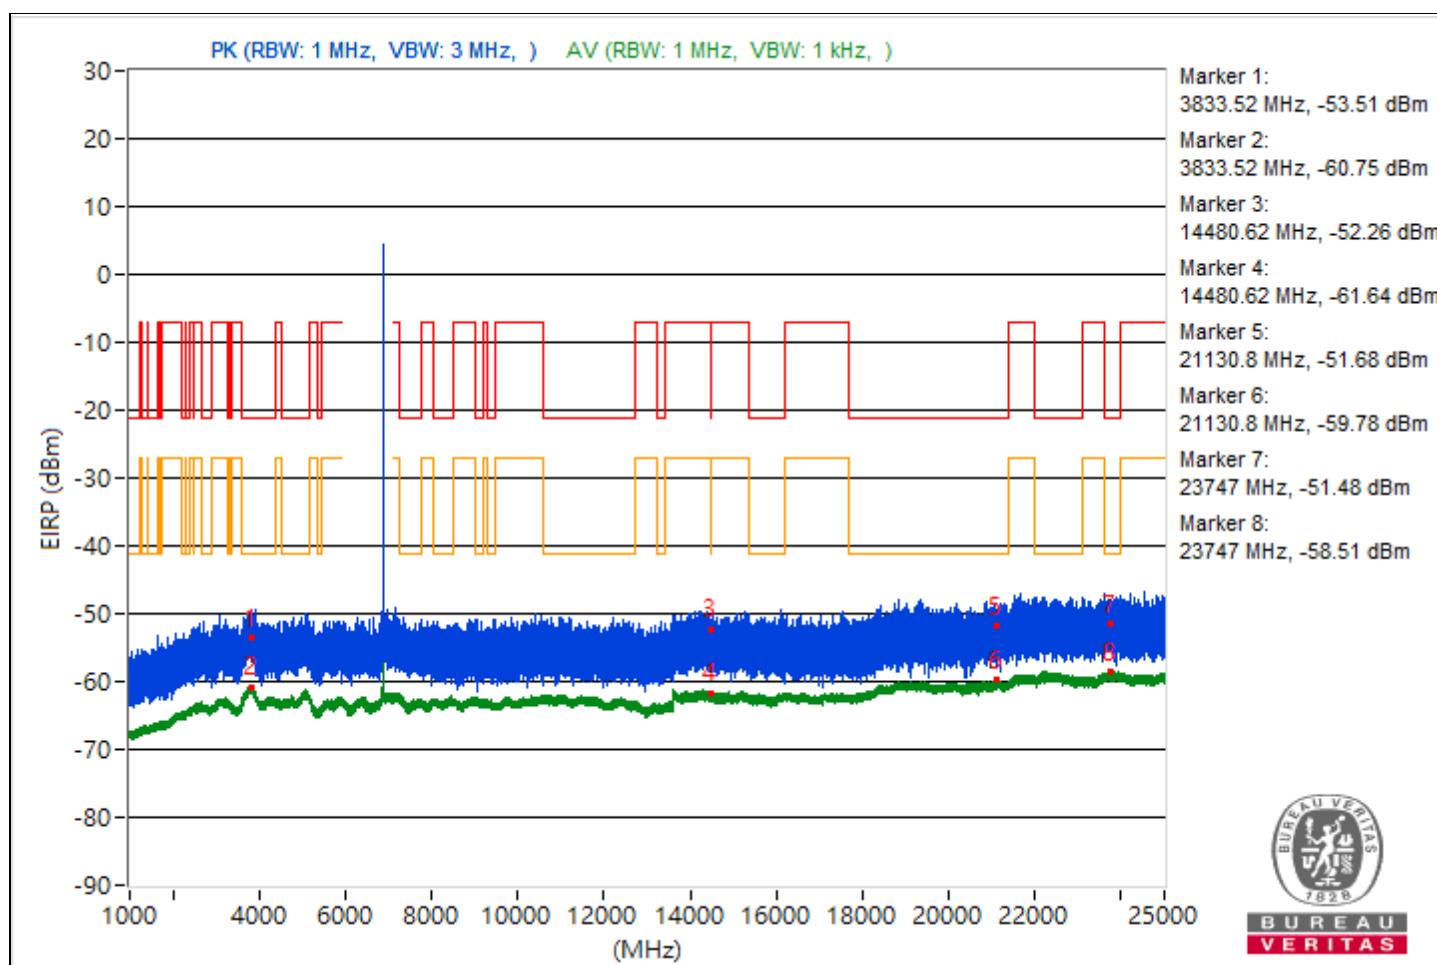


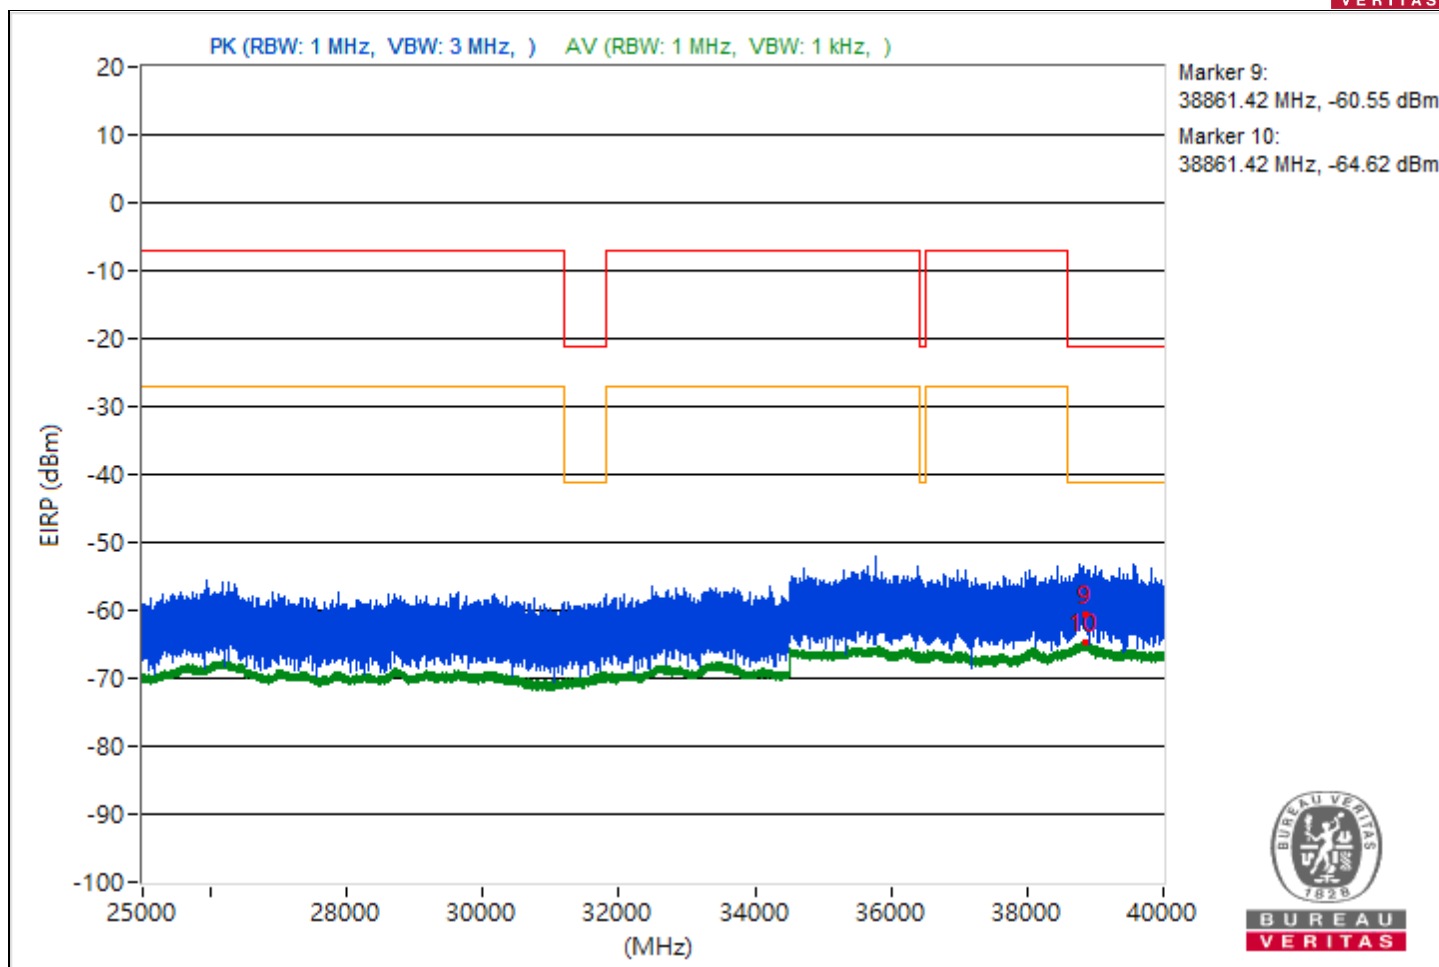


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.32	42.66 PK	74	-31.34	-57.52	4.92	-52.6
2	3815.32	34.46 AV	54	-19.54	-65.72	4.92	-60.8
3	7273.01	42.9 PK	74	-31.1	-57.28	4.92	-52.36
4	7273.01	33.87 AV	54	-20.13	-66.31	4.92	-61.39
5	21065.1	43.47 PK	74	-30.53	-56.71	4.92	-51.79
6	21065.1	35.34 AV	54	-18.66	-64.84	4.92	-59.92
7	23682.3	44.08 PK	74	-29.92	-56.1	4.92	-51.18
8	23682.3	36.79 AV	54	-17.21	-63.39	4.92	-58.47
9	38833.07	37.37 PK	74	-36.63	-62.81	4.92	-57.89
10	38833.07	30.75 AV	54	-23.25	-69.43	4.92	-64.51

Note: Margin value = Emission Level - Limit value

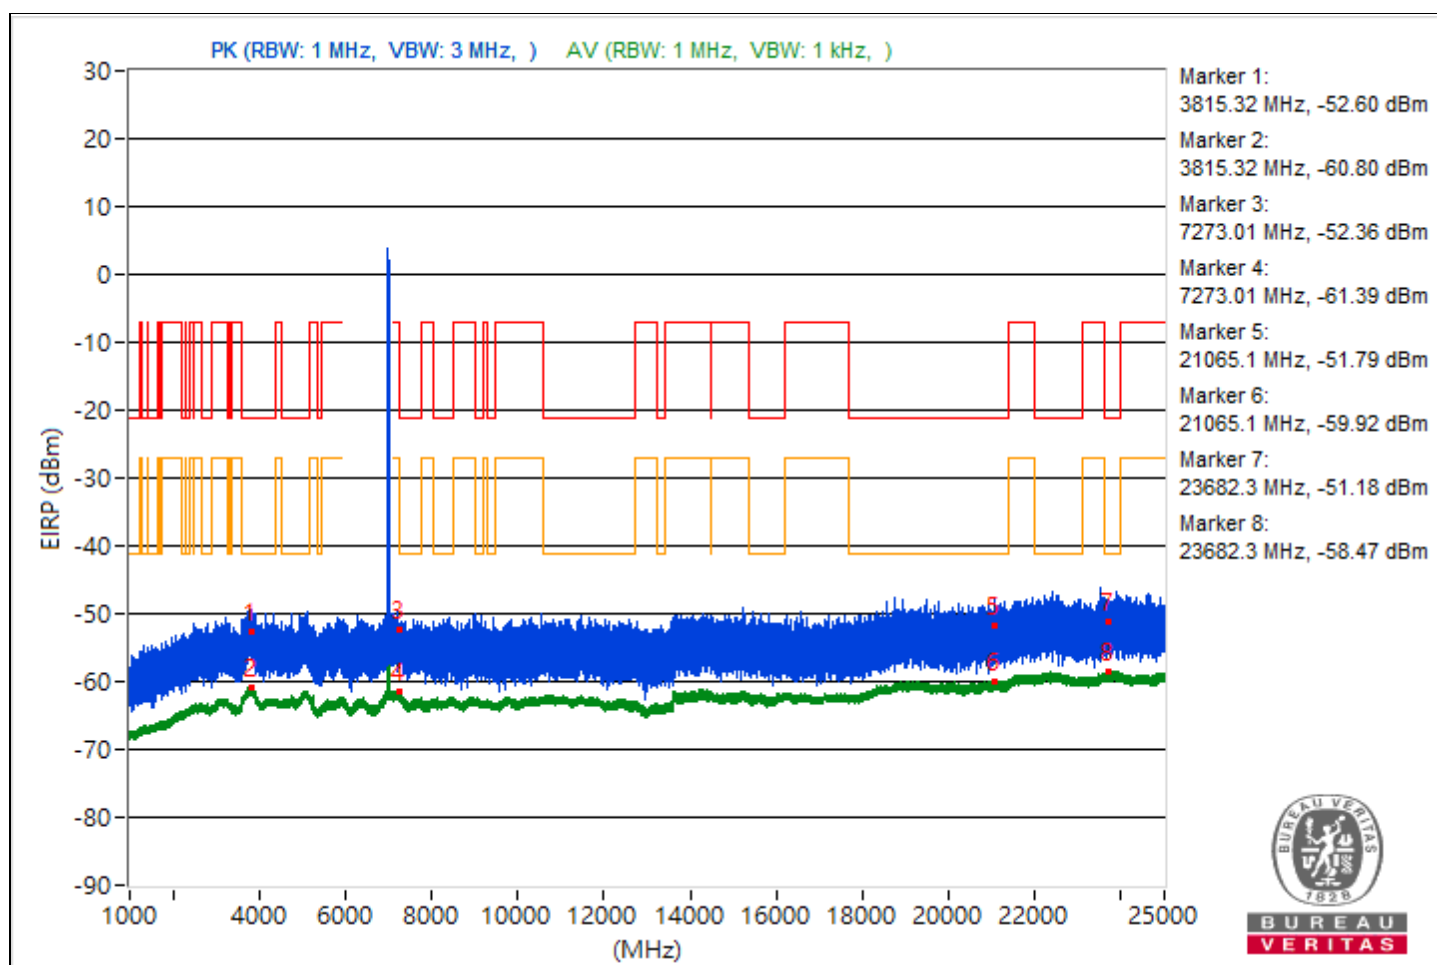


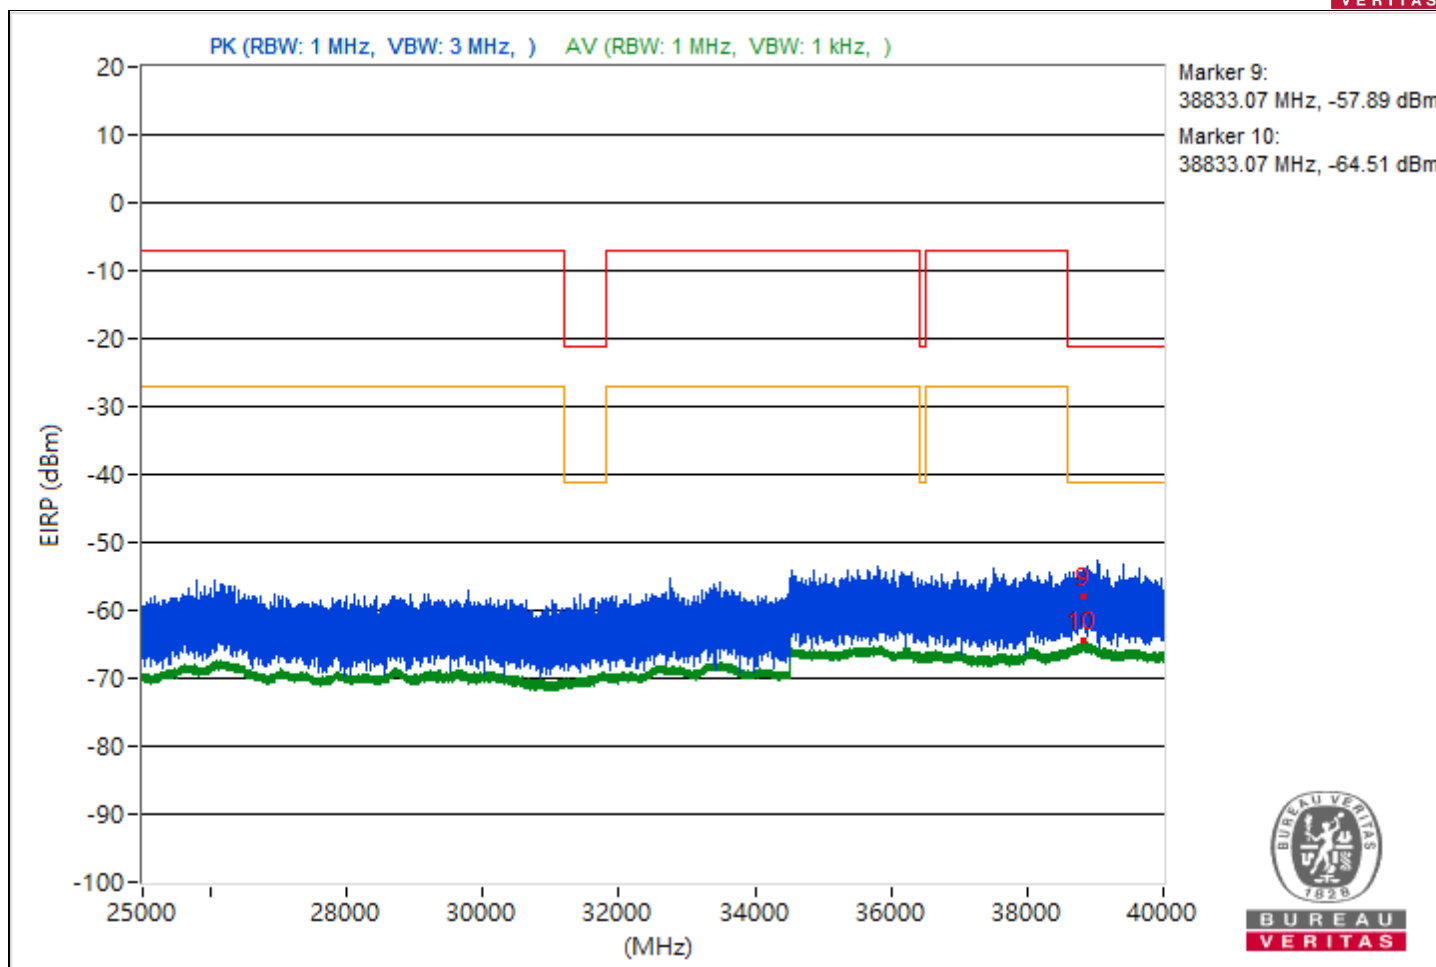


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.76	41.37 PK	74	-32.63	-58.81	4.92	-53.89
2	3798.76	34.52 AV	54	-19.48	-65.66	4.92	-60.74
3	7254.58	41.29 PK	74	-32.71	-58.89	4.92	-53.97
4	7254.58	34.34 AV	54	-19.66	-65.84	4.92	-60.92
5	21089.9	40.9 PK	74	-33.1	-59.28	4.92	-54.36
6	21089.9	35.4 AV	54	-18.6	-64.78	4.92	-59.86
7	23909.2	43.38 PK	74	-30.62	-56.8	4.92	-51.88
8	23909.2	36.79 AV	54	-17.21	-63.39	4.92	-58.47
9	38812.53	36.53 PK	74	-37.47	-63.65	4.92	-58.73
10	38812.53	30.54 AV	54	-23.46	-69.64	4.92	-64.72

Note: Margin value = Emission Level - Limit value

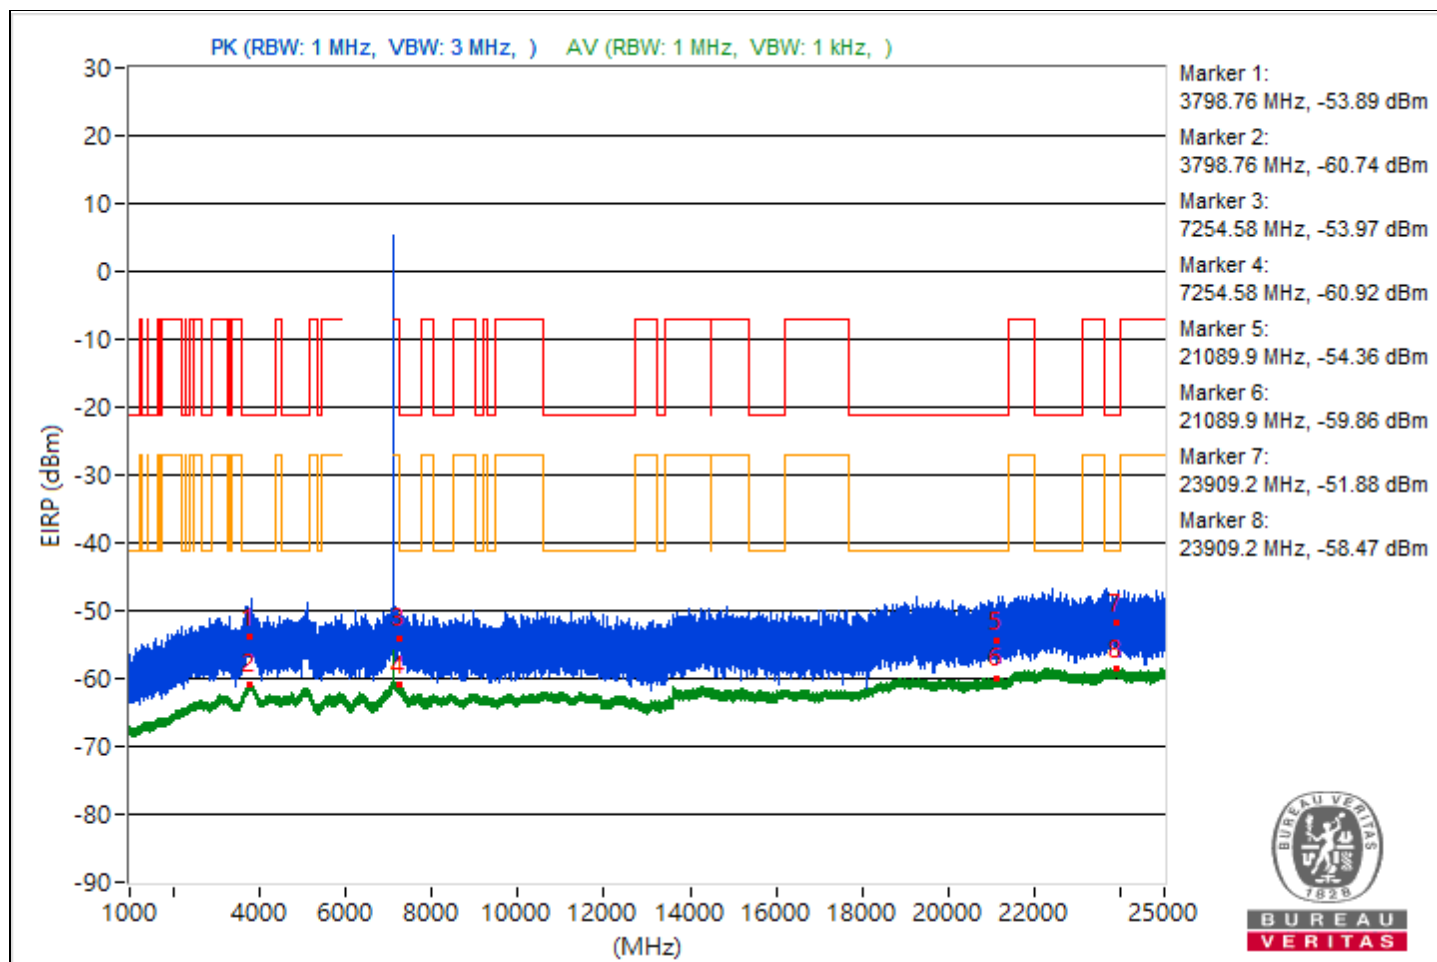


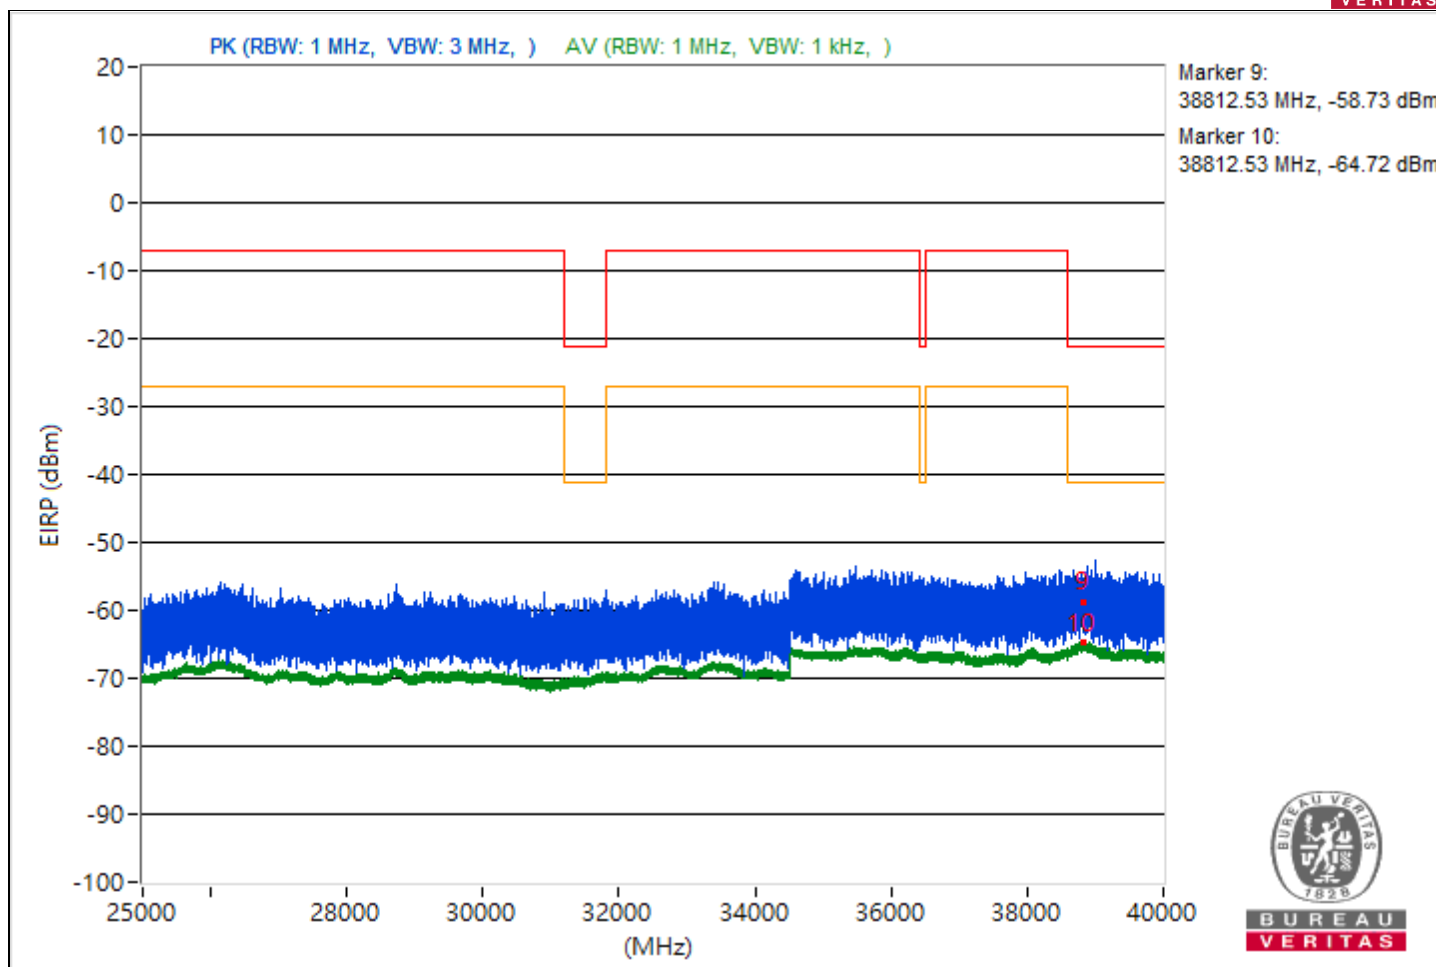


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.76	42.19 PK	74	-31.81	-57.99	4.92	-53.07
2	3777.76	34.54 AV	54	-19.46	-65.64	4.92	-60.72
3	14488.89	42.07 PK	74	-31.93	-58.11	4.92	-53.19
4	14488.89	33.62 AV	54	-20.38	-66.56	4.92	-61.64
5	21144.8	40.93 PK	74	-33.07	-59.25	4.92	-54.33
6	21144.8	35.36 AV	54	-18.64	-64.82	4.92	-59.9
7	22226.9	42.95 PK	74	-31.05	-57.23	4.92	-52.31
8	22226.9	36.7 AV	54	-17.3	-63.48	4.92	-58.56
9	38866.04	36.14 PK	74	-37.86	-64.04	4.92	-59.12
10	38866.04	30.6 AV	54	-23.4	-69.58	4.92	-64.66

Note: Margin value = Emission Level - Limit value

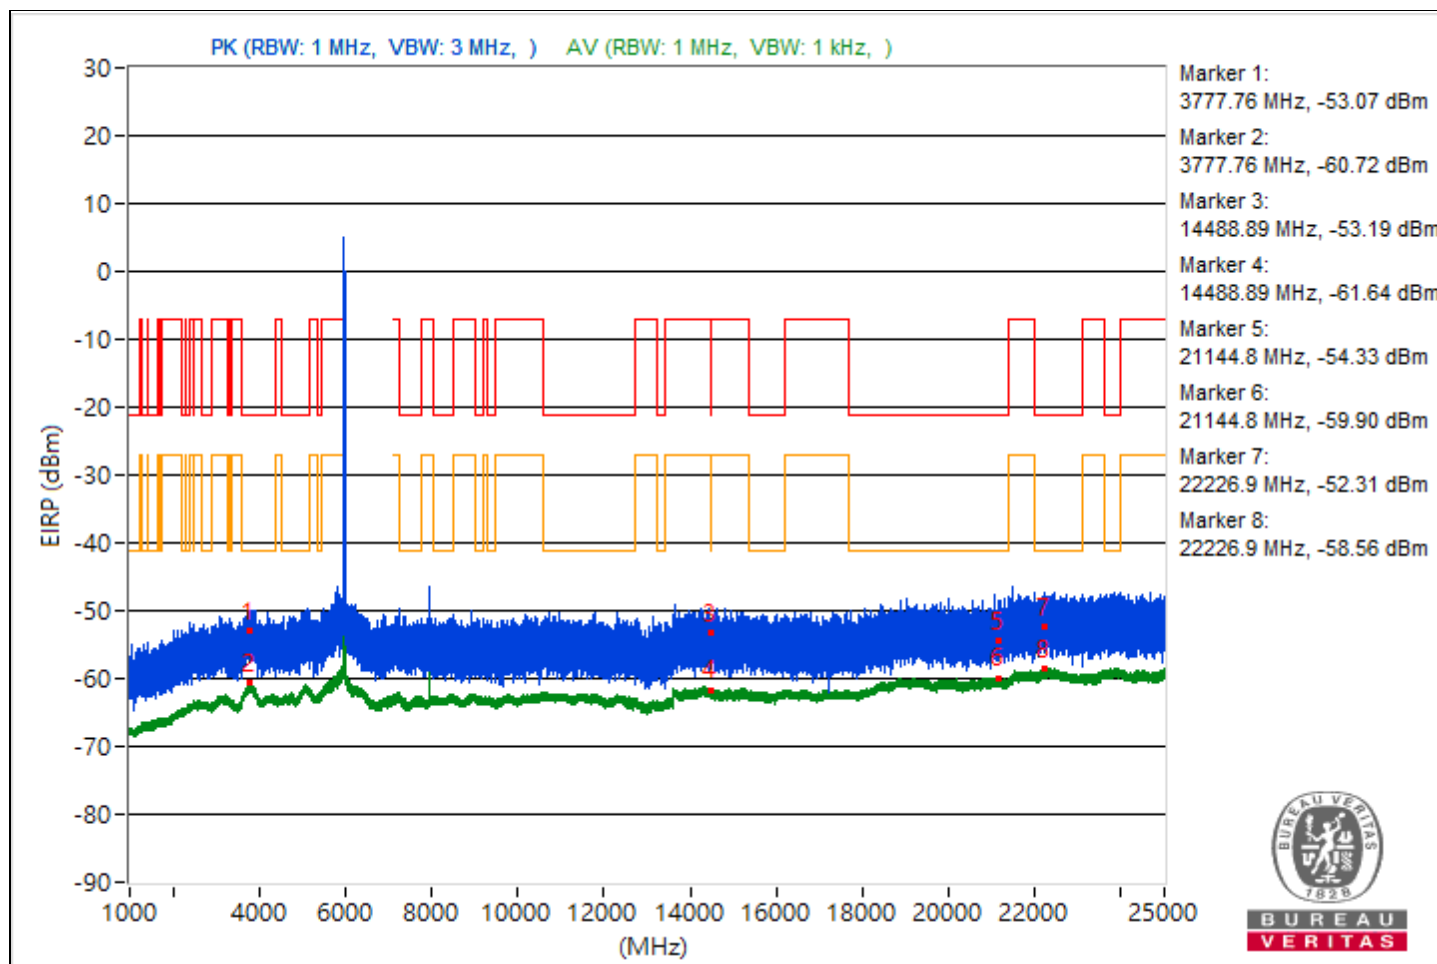


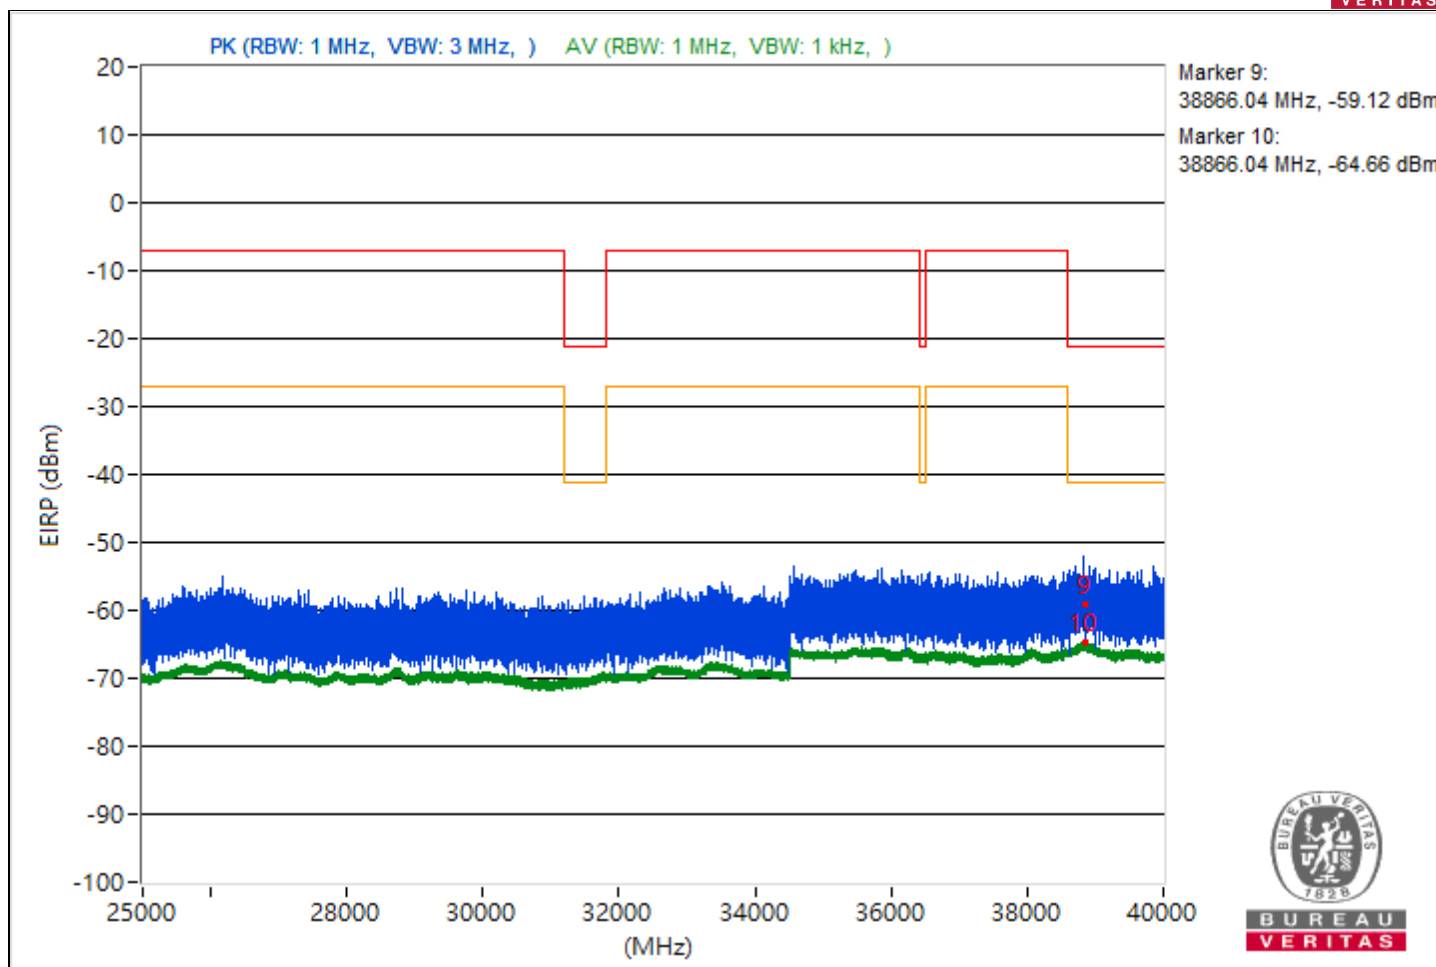


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.97	40.68 PK	74	-33.32	-59.5	4.92	-54.58
2	3803.97	34.45 AV	54	-19.55	-65.73	4.92	-60.81
3	8220.09	47.44 PK	74	-26.56	-52.74	4.92	-47.82
4	8220.09	43.92 AV	54	-10.08	-56.26	4.92	-51.34
5	21162.7	42.16 PK	74	-31.84	-58.02	4.92	-53.1
6	21162.7	35.36 AV	54	-18.64	-64.82	4.92	-59.9
7	23794.9	42.34 PK	74	-31.66	-57.84	4.92	-52.92
8	23794.9	36.82 AV	54	-17.18	-63.36	4.92	-58.44
9	38817.42	38.98 PK	74	-35.02	-61.2	4.92	-56.28
10	38817.42	30.62 AV	54	-23.38	-69.56	4.92	-64.64

Note: Margin value = Emission Level - Limit value

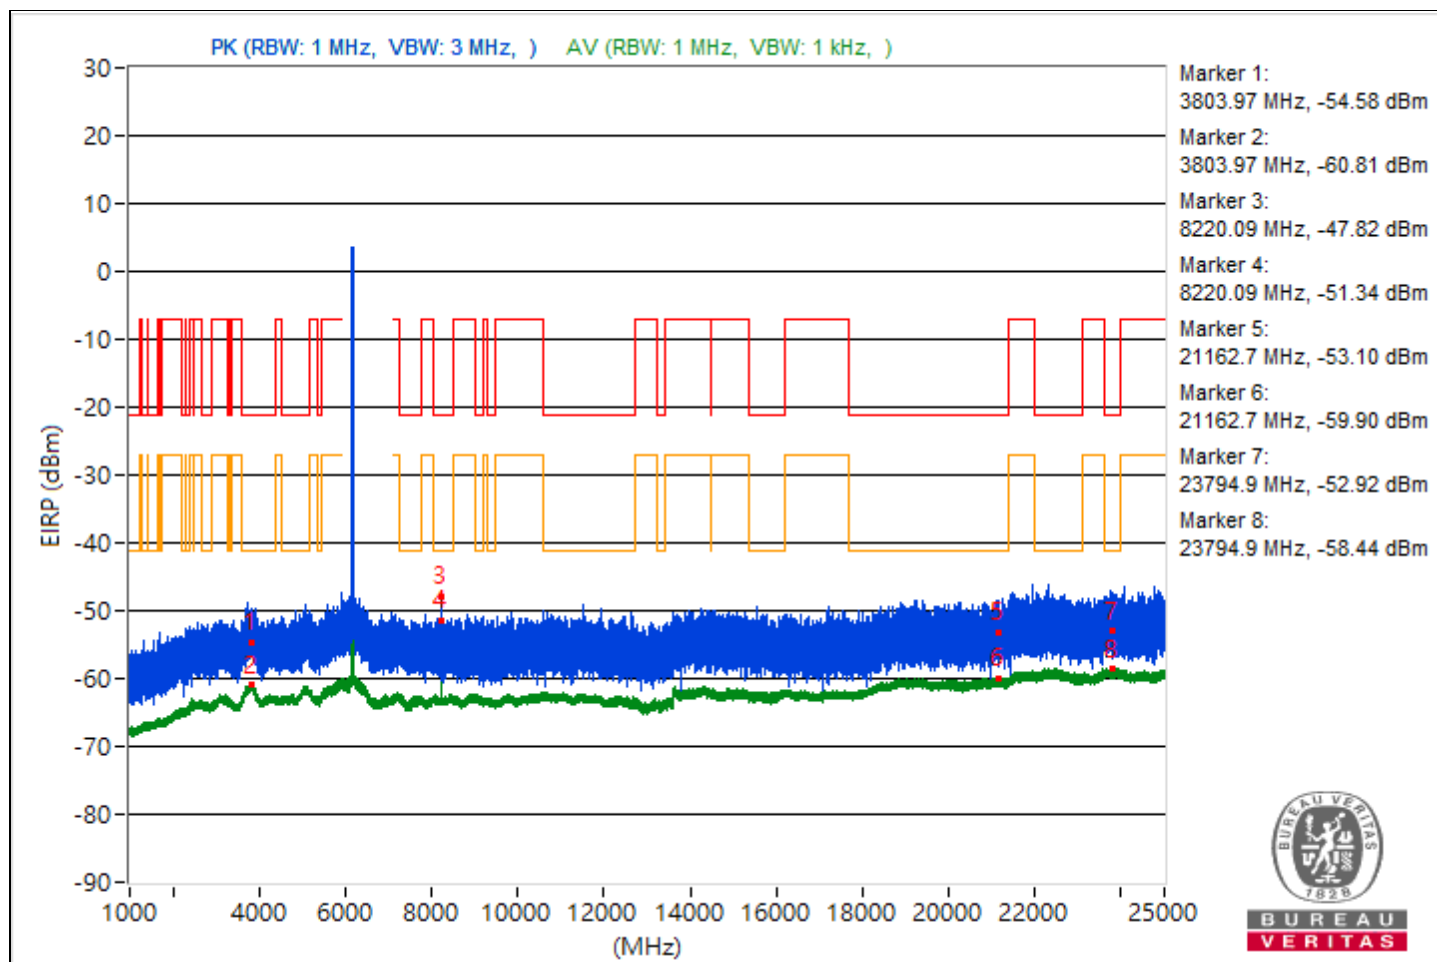


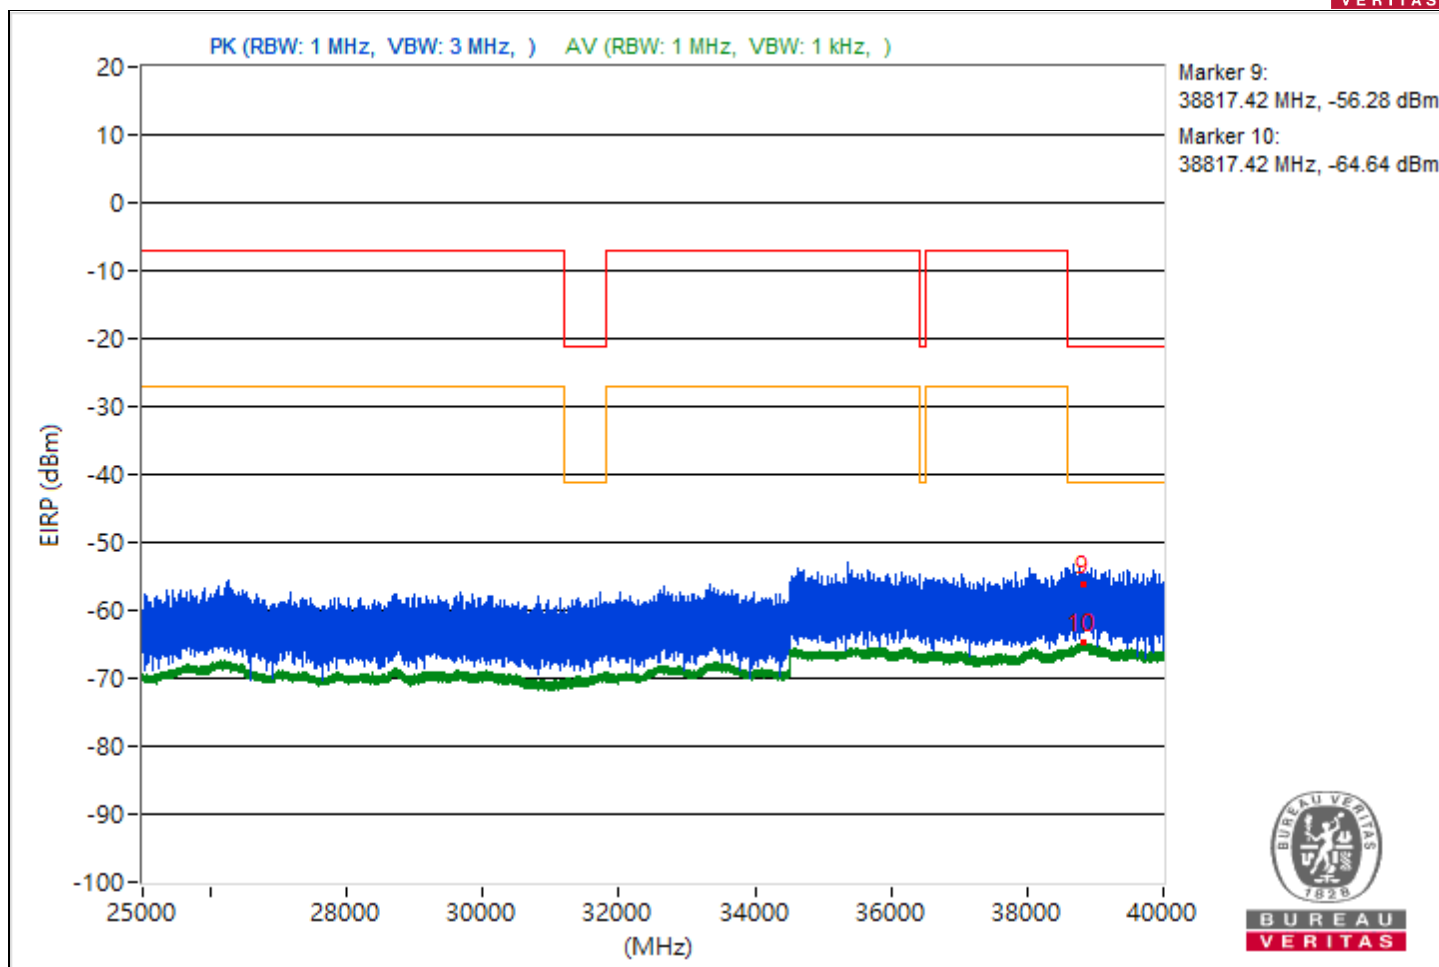


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.97	43.44 PK	74	-30.56	-56.74	4.92	-51.82
2	3796.97	34.66 AV	54	-19.34	-65.52	4.92	-60.6
3	14474.4	41.96 PK	74	-32.04	-58.22	4.92	-53.3
4	14474.4	33.7 AV	54	-20.3	-66.48	4.92	-61.56
5	21109.9	41.45 PK	74	-32.55	-58.73	4.92	-53.81
6	21109.9	35.48 AV	54	-18.52	-64.7	4.92	-59.78
7	23936.6	42.68 PK	74	-31.32	-57.5	4.92	-52.58
8	23936.6	36.76 AV	54	-17.24	-63.42	4.92	-58.5
9	38826.04	37.08 PK	74	-36.92	-63.1	4.92	-58.18
10	38826.04	30.68 AV	54	-23.32	-69.5	4.92	-64.58

Note: Margin value = Emission Level - Limit value

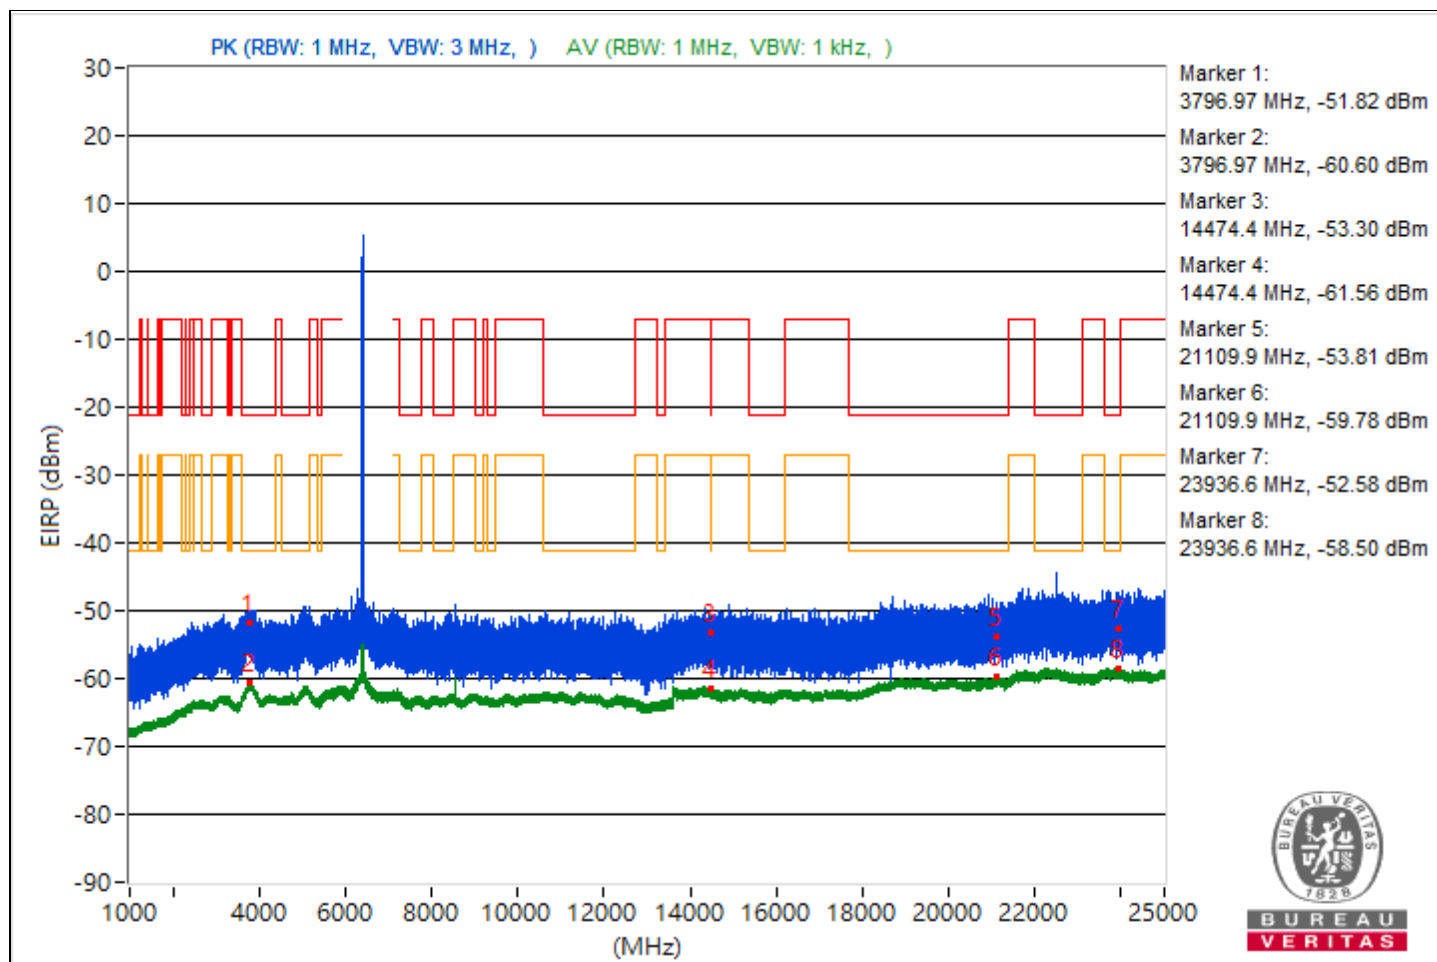


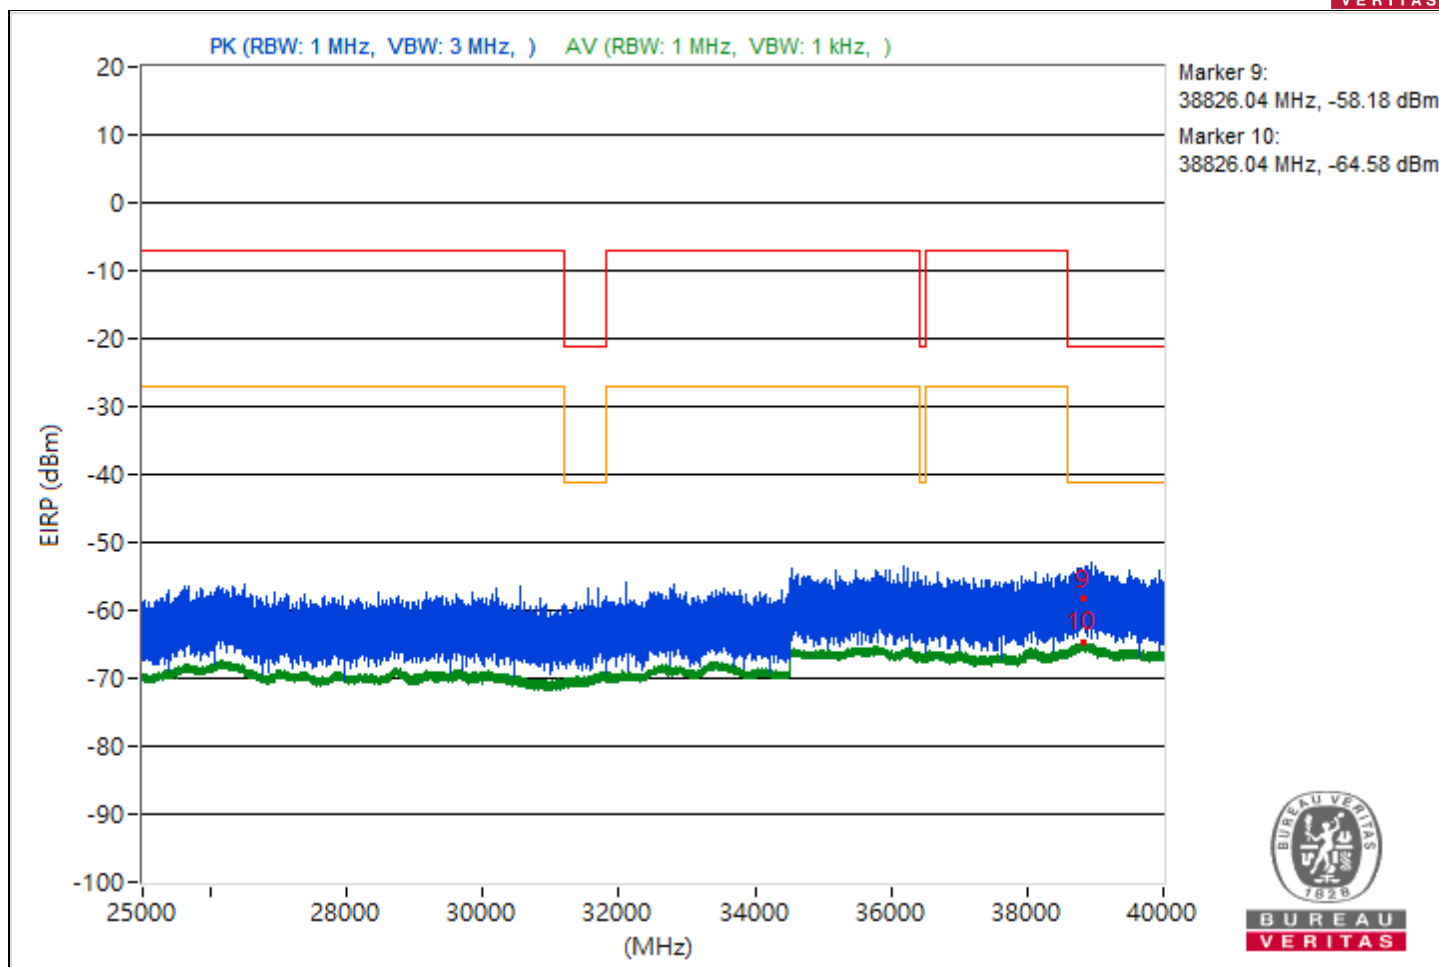


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3818.74	41.35 PK	74	-32.65	-58.83	4.92	-53.91
2	3818.74	34.62 AV	54	-19.38	-65.56	4.92	-60.64
3	14470.04	40.76 PK	74	-33.24	-59.42	4.92	-54.5
4	14470.04	33.72 AV	54	-20.28	-66.46	4.92	-61.54
5	21194.1	42.78 PK	74	-31.22	-57.4	4.92	-52.48
6	21194.1	35.73 AV	54	-18.27	-64.45	4.92	-59.53
7	23866.2	47.28 PK	74	-26.72	-52.9	4.92	-47.98
8	23866.2	36.79 AV	54	-17.21	-63.39	4.92	-58.47
9	38828.18	37.92 PK	74	-36.08	-62.26	4.92	-57.34
10	38828.18	30.71 AV	54	-23.29	-69.47	4.92	-64.55

Note: Margin value = Emission Level - Limit value

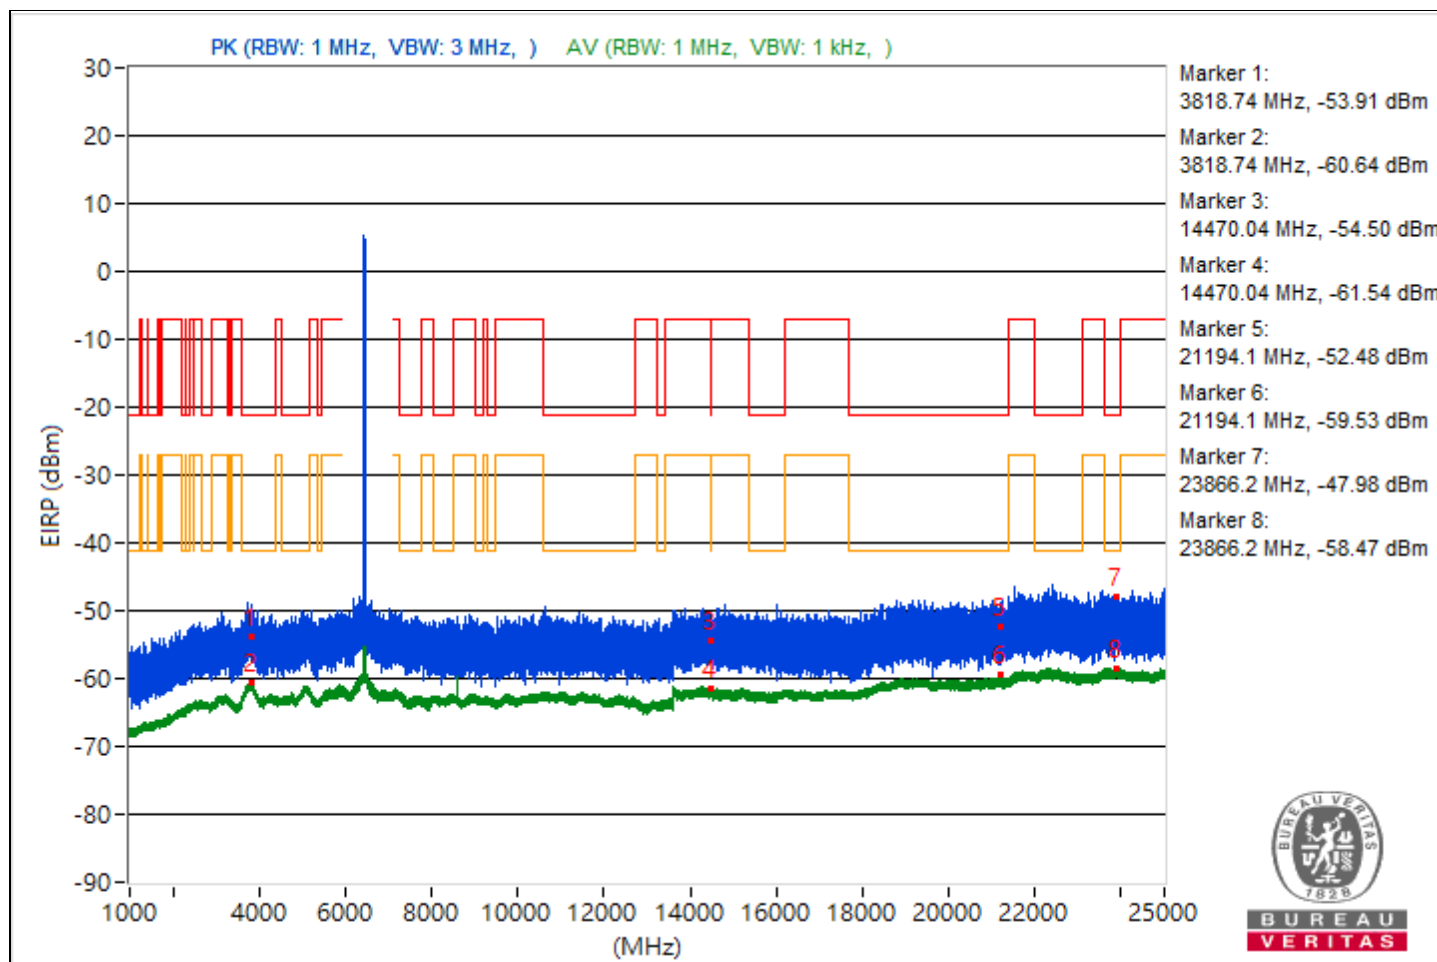


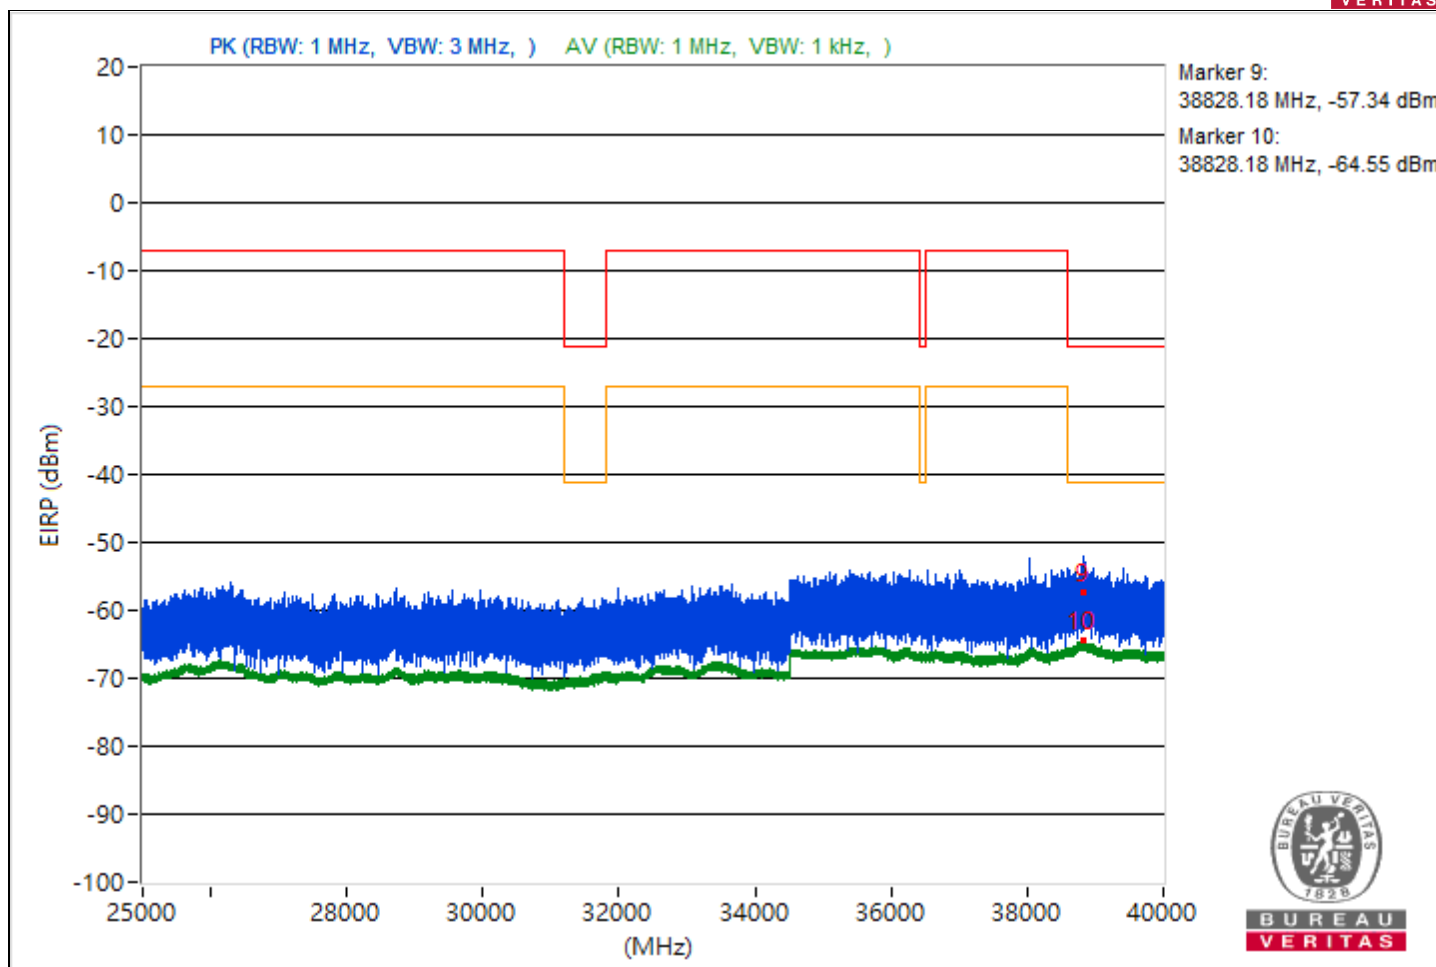


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.74	40.92 PK	74	-33.08	-59.26	4.92	-54.34
2	3790.74	34.54 AV	54	-19.46	-65.64	4.92	-60.72
3	14476.53	42.61 PK	74	-31.39	-57.57	4.92	-52.65
4	14476.53	33.66 AV	54	-20.34	-66.52	4.92	-61.6
5	21157.3	42.35 PK	74	-31.65	-57.83	4.92	-52.91
6	21157.3	35.59 AV	54	-18.41	-64.59	4.92	-59.67
7	22244.7	46.41 PK	74	-27.59	-53.77	4.92	-48.85
8	22244.7	36.73 AV	54	-17.27	-63.45	4.92	-58.53
9	38788.53	36.81 PK	74	-37.19	-63.37	4.92	-58.45
10	38788.53	30.67 AV	54	-23.33	-69.51	4.92	-64.59

Note: Margin value = Emission Level - Limit value

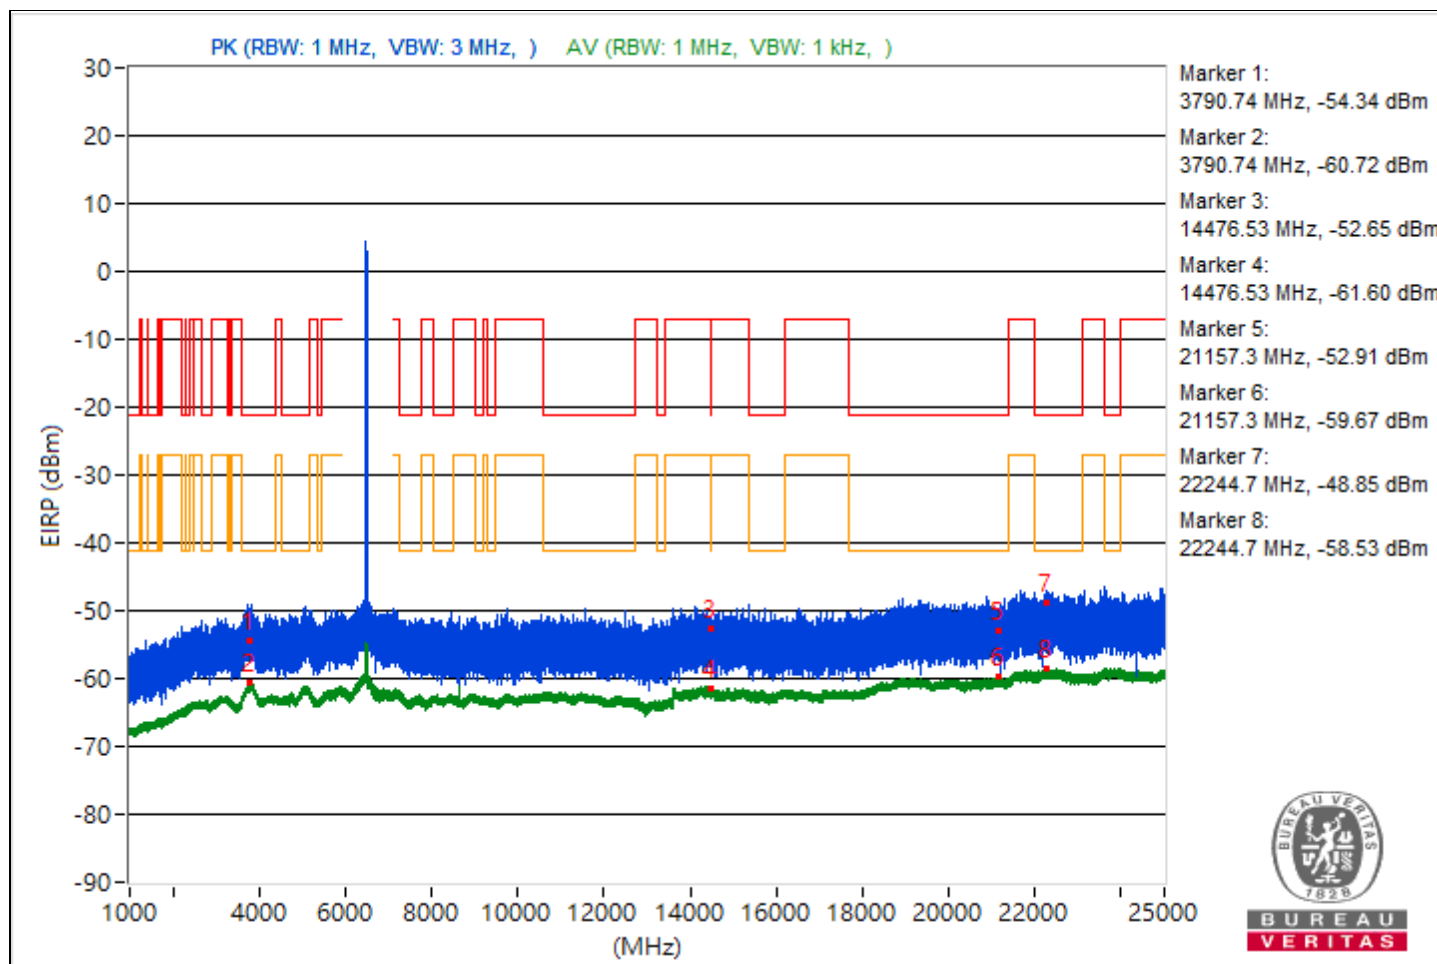


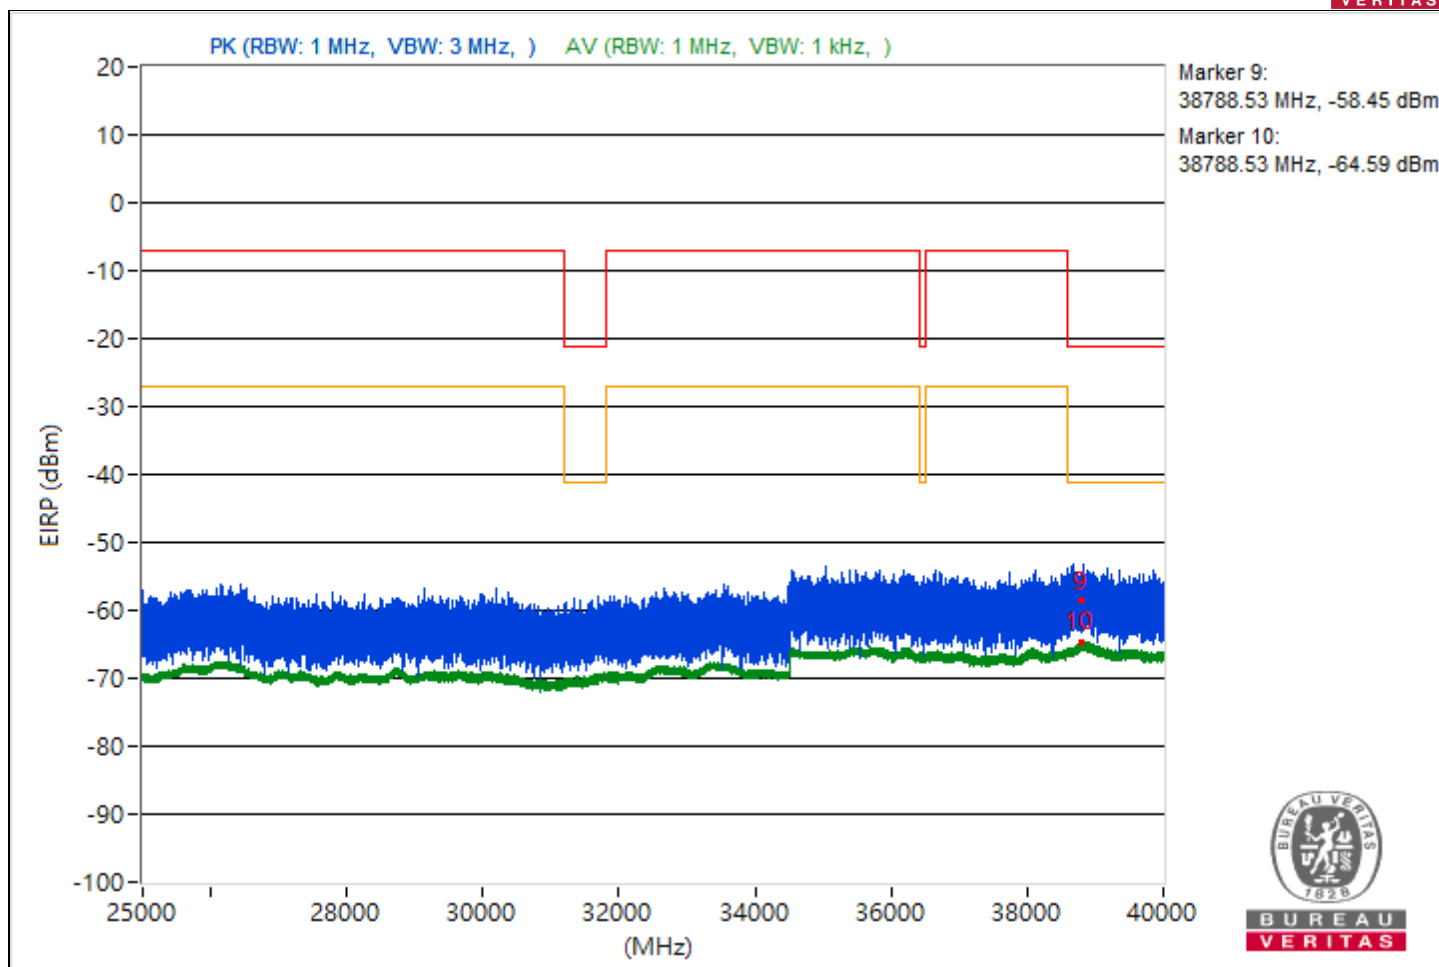


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3830.26	42.58 PK	74	-31.42	-57.6	4.92	-52.68
2	3830.26	34.52 AV	54	-19.48	-65.66	4.92	-60.74
3	14478.04	41.37 PK	74	-32.63	-58.81	4.92	-53.89
4	14478.04	33.75 AV	54	-20.25	-66.43	4.92	-61.51
5	21088.7	41.46 PK	74	-32.54	-58.72	4.92	-53.8
6	21088.7	35.4 AV	54	-18.6	-64.78	4.92	-59.86
7	23871.1	41.67 PK	74	-32.33	-58.51	4.92	-53.59
8	23871.1	36.72 AV	54	-17.28	-63.46	4.92	-58.54
9	38845.33	36.25 PK	74	-37.75	-63.93	4.92	-59.01
10	38845.33	30.66 AV	54	-23.34	-69.52	4.92	-64.6

Note: Margin value = Emission Level - Limit value

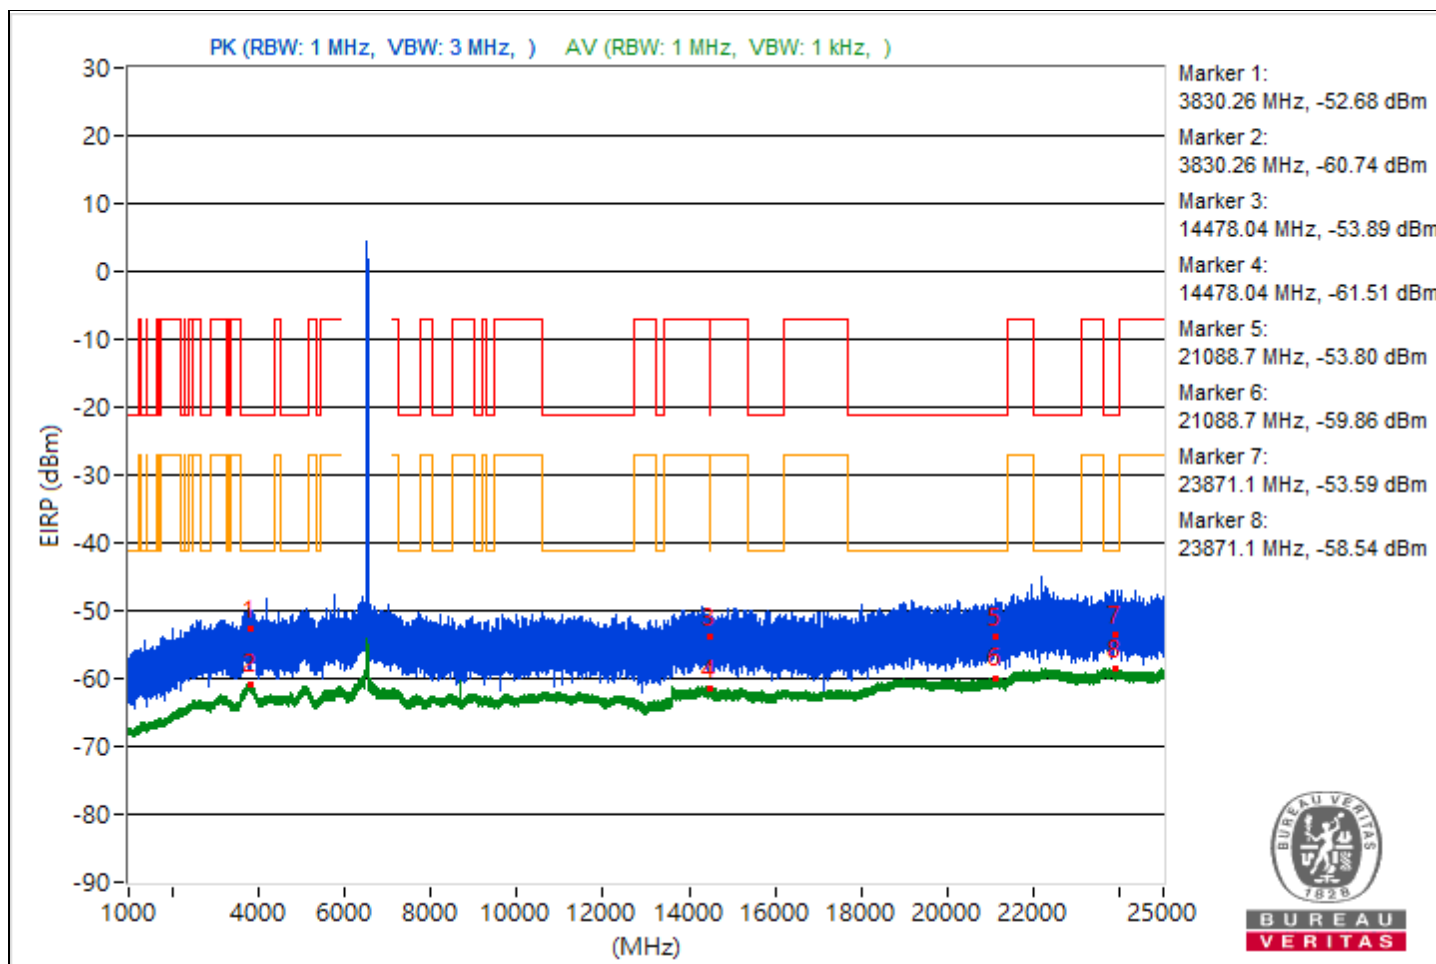


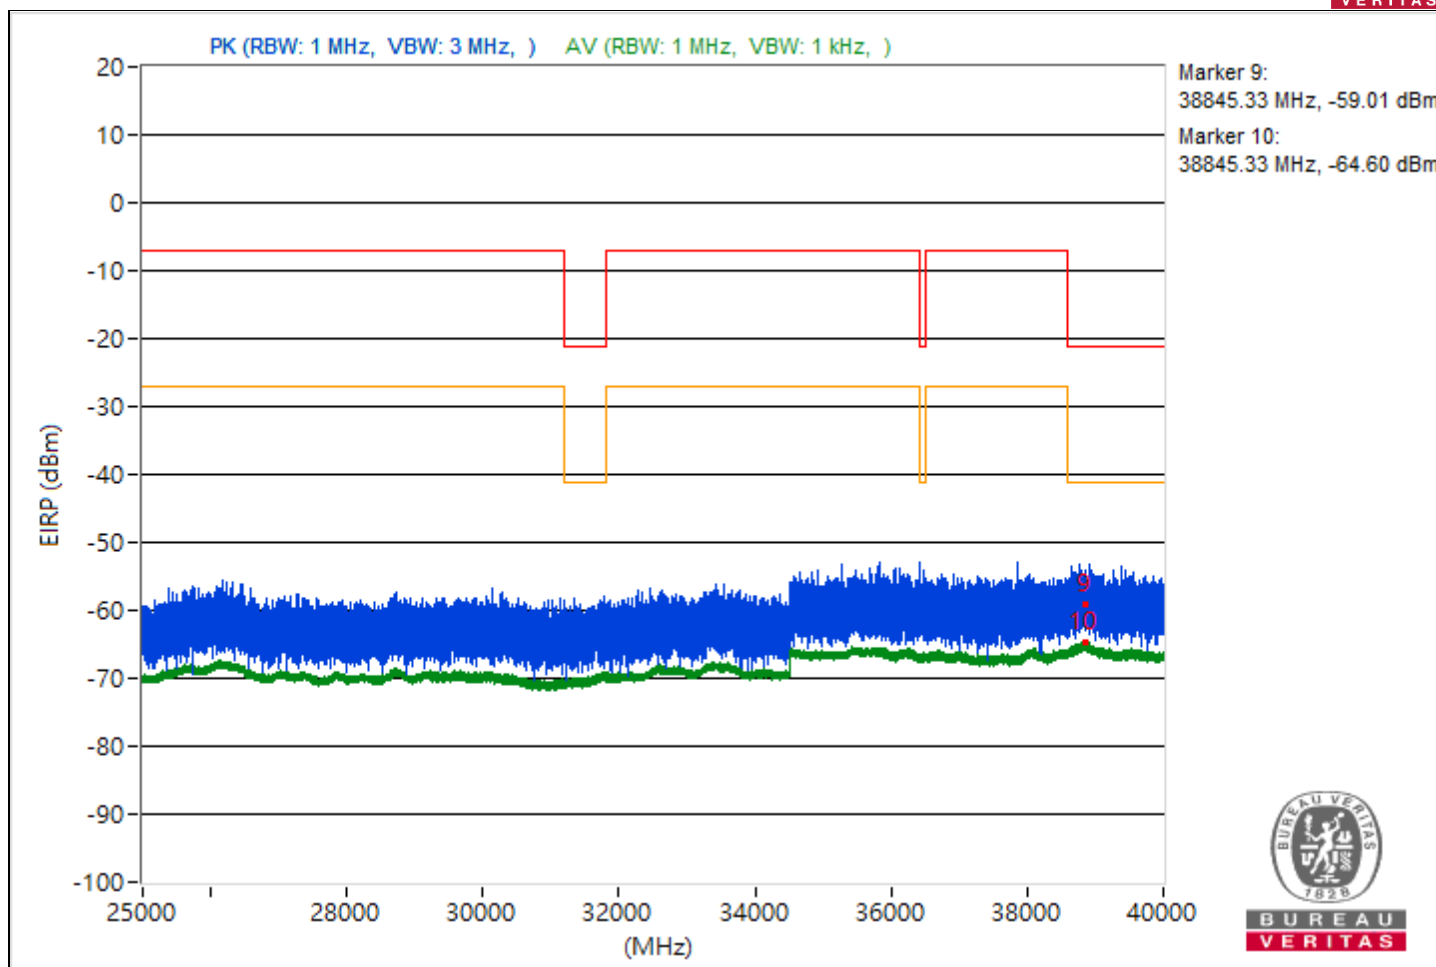


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.87	42.71 PK	74	-31.29	-57.47	4.92	-52.55
2	3808.87	34.64 AV	54	-19.36	-65.54	4.92	-60.62
3	14472.27	41.1 PK	74	-32.9	-59.08	4.92	-54.16
4	14472.27	33.59 AV	54	-20.41	-66.59	4.92	-61.67
5	21106.9	41.83 PK	74	-32.17	-58.35	4.92	-53.43
6	21106.9	35.36 AV	54	-18.64	-64.82	4.92	-59.9
7	23864.5	42.23 PK	74	-31.77	-57.95	4.92	-53.03
8	23864.5	36.7 AV	54	-17.3	-63.48	4.92	-58.56
9	38859.02	35.54 PK	74	-38.46	-64.64	4.92	-59.72
10	38859.02	30.6 AV	54	-23.4	-69.58	4.92	-64.66

Note: Margin value = Emission Level - Limit value

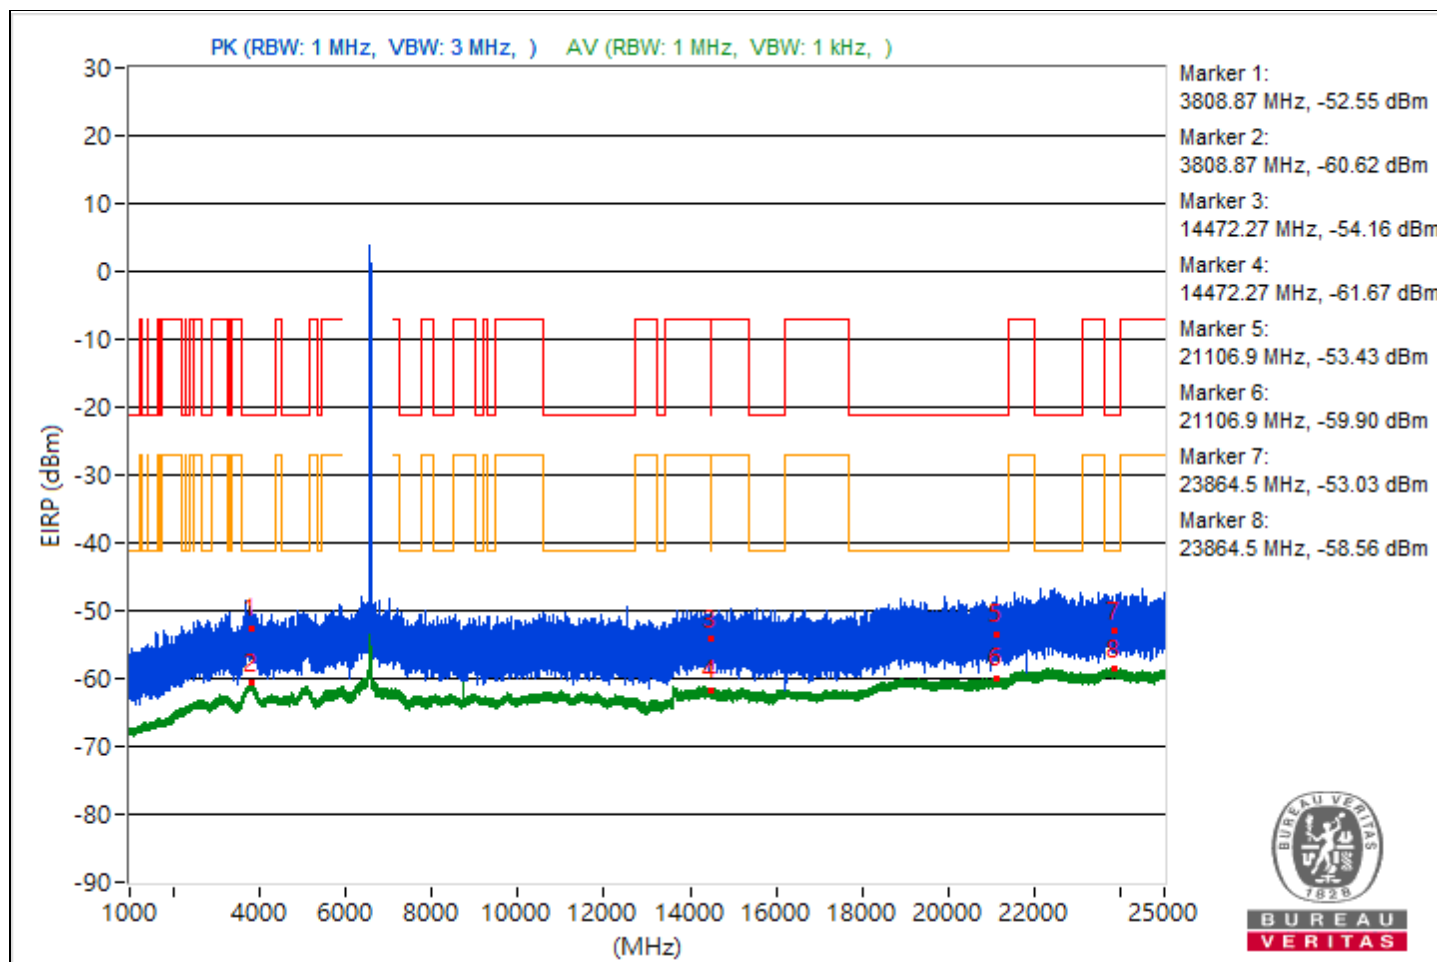


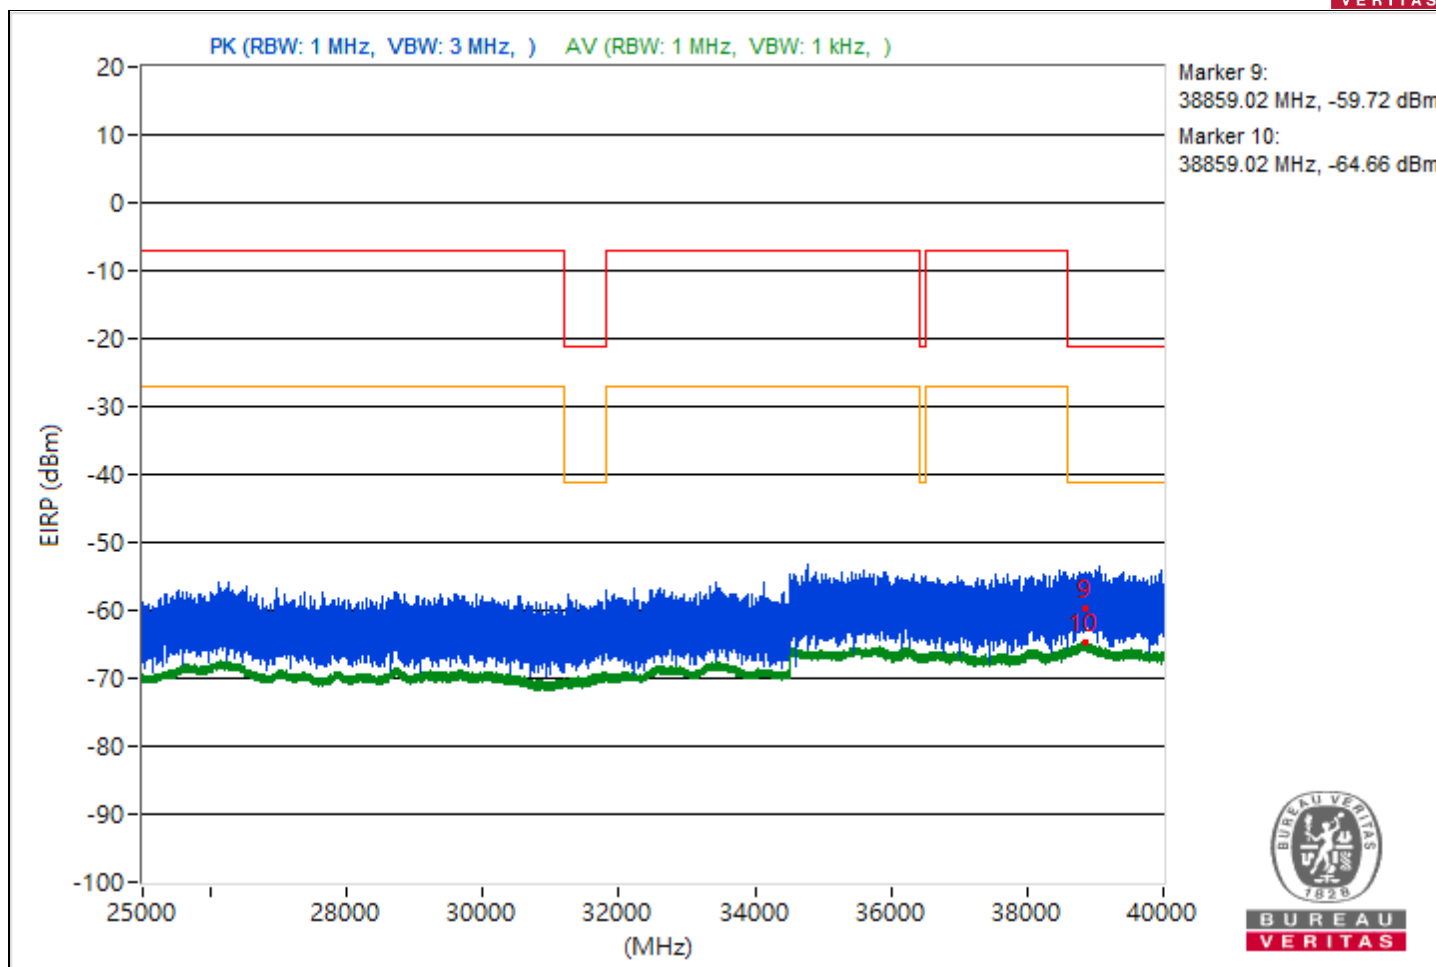


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.19	41.24 PK	74	-32.76	-58.94	4.92	-54.02
2	3789.19	34.62 AV	54	-19.38	-65.56	4.92	-60.64
3	7252.4	41.55 PK	74	-32.45	-58.63	4.92	-53.71
4	7252.4	33.76 AV	54	-20.24	-66.42	4.92	-61.5
5	21155.9	43.71 PK	74	-30.29	-56.47	4.92	-51.55
6	21155.9	35.56 AV	54	-18.44	-64.62	4.92	-59.7
7	22284.4	43.52 PK	74	-30.48	-56.66	4.92	-51.74
8	22284.4	36.73 AV	54	-17.27	-63.45	4.92	-58.53
9	38839.02	35.59 PK	74	-38.41	-64.59	4.92	-59.67
10	38839.02	30.5 AV	54	-23.5	-69.68	4.92	-64.76

Note: Margin value = Emission Level - Limit value

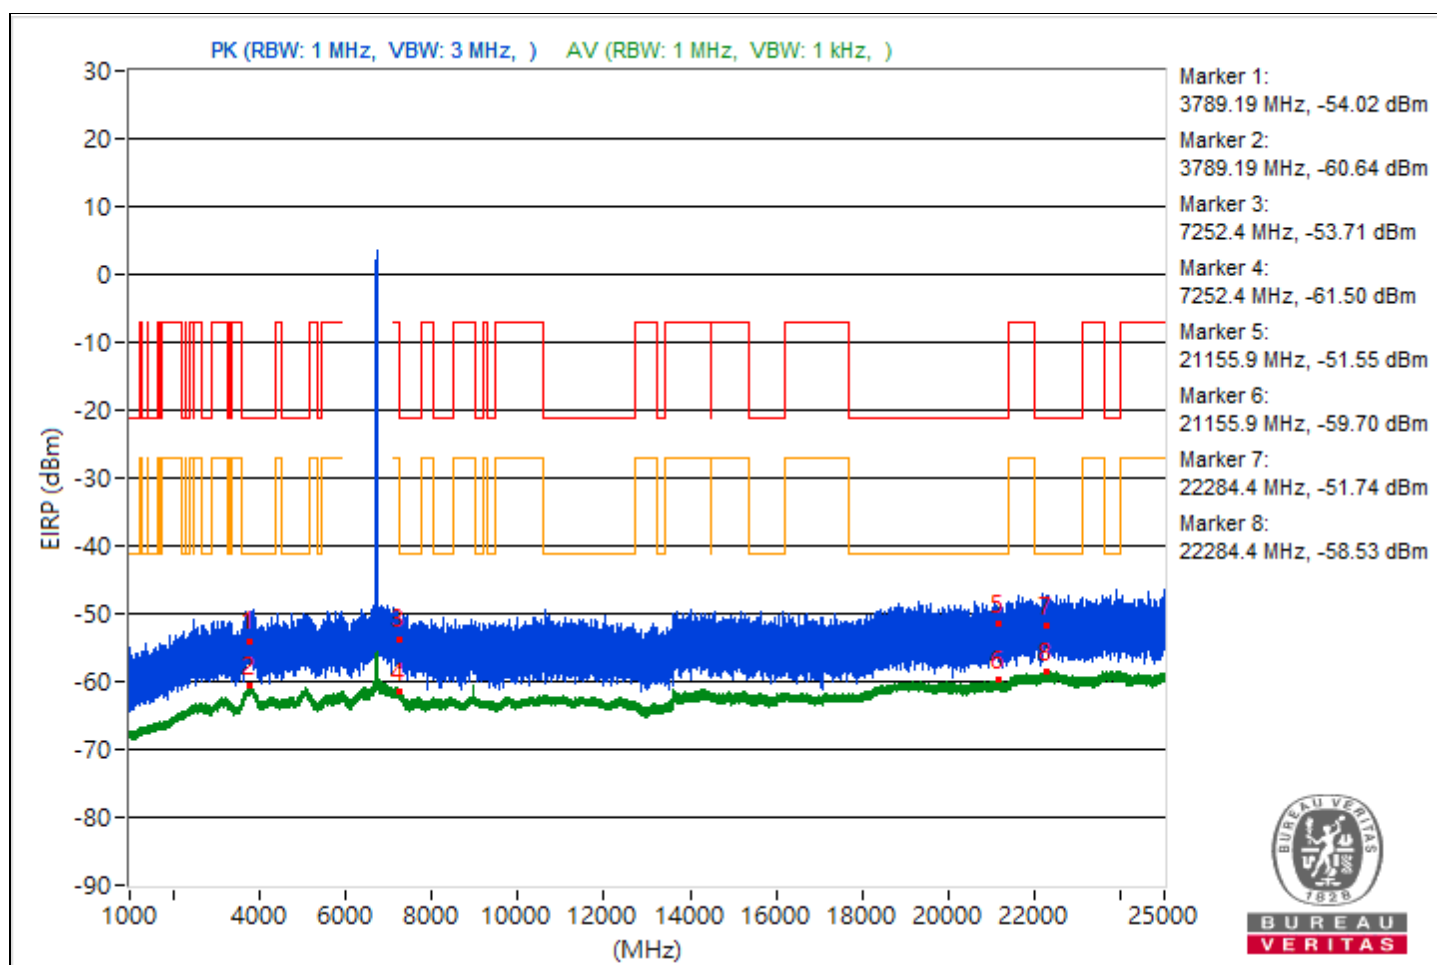


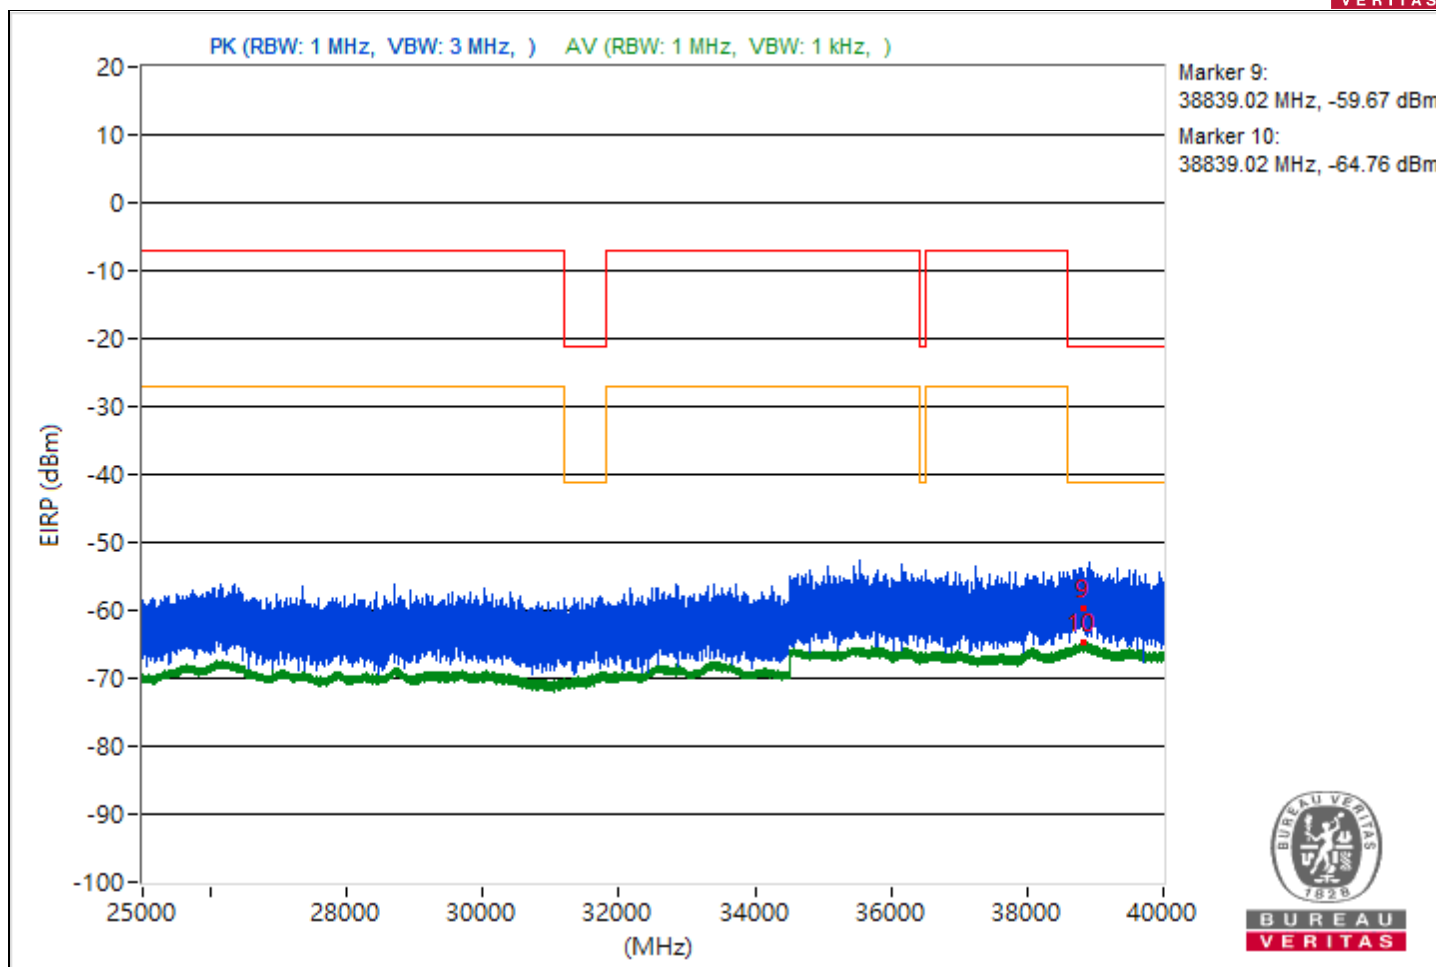


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.4	42.85 PK	74	-31.15	-57.33	4.92	-52.41
2	3787.4	34.55 AV	54	-19.45	-65.63	4.92	-60.71
3	7258.7	41.8 PK	74	-32.2	-58.38	4.92	-53.46
4	7258.7	34.21 AV	54	-19.79	-65.97	4.92	-61.05
5	21068.4	42.48 PK	74	-31.52	-57.7	4.92	-52.78
6	21068.4	35.5 AV	54	-18.5	-64.68	4.92	-59.76
7	23729.3	44.2 PK	74	-29.8	-55.98	4.92	-51.06
8	23729.3	36.87 AV	54	-17.13	-63.31	4.92	-58.39
9	38790.4	38.94 PK	74	-35.06	-61.24	4.92	-56.32
10	38790.4	30.6 AV	54	-23.4	-69.58	4.92	-64.66

Note: Margin value = Emission Level - Limit value

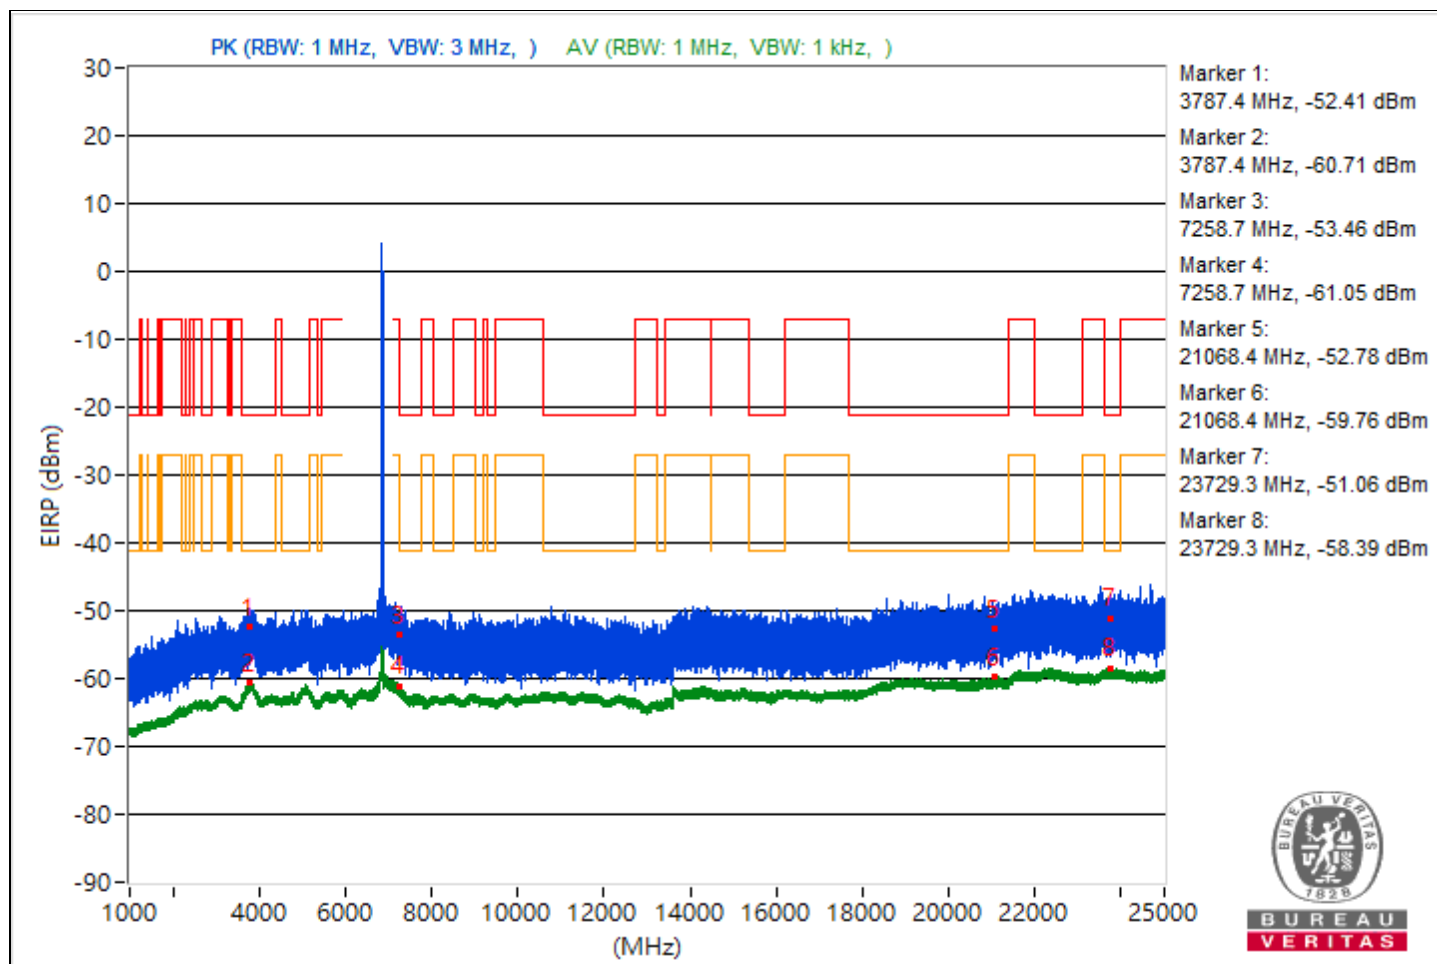


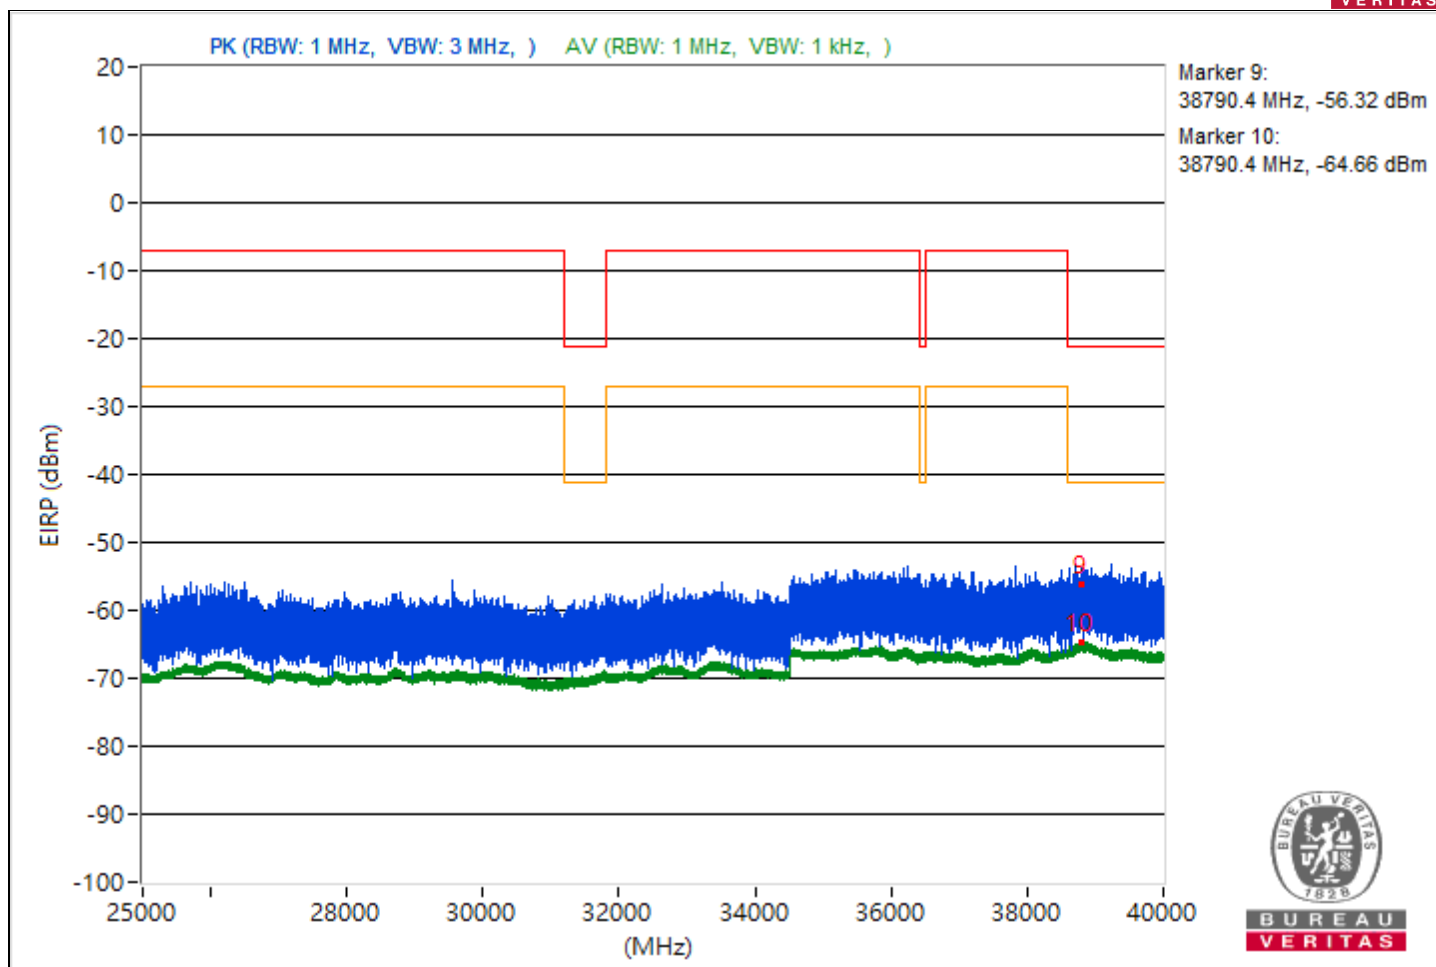


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3819.76	41.58 PK	74	-32.42	-58.6	4.92	-53.68
2	3819.76	34.41 AV	54	-19.59	-65.77	4.92	-60.85
3	7253.41	42.35 PK	74	-31.65	-57.83	4.92	-52.91
4	7253.41	34.48 AV	54	-19.52	-65.7	4.92	-60.78
5	21390.7	40.47 PK	74	-33.53	-59.71	4.92	-54.79
6	21390.7	35.68 AV	54	-18.32	-64.5	4.92	-59.58
7	23885	41.38 PK	74	-32.62	-58.8	4.92	-53.88
8	23885	36.78 AV	54	-17.22	-63.4	4.92	-58.48
9	38792.71	38.44 PK	74	-35.56	-61.74	4.92	-56.82
10	38792.71	30.82 AV	54	-23.18	-69.36	4.92	-64.44

Note: Margin value = Emission Level - Limit value

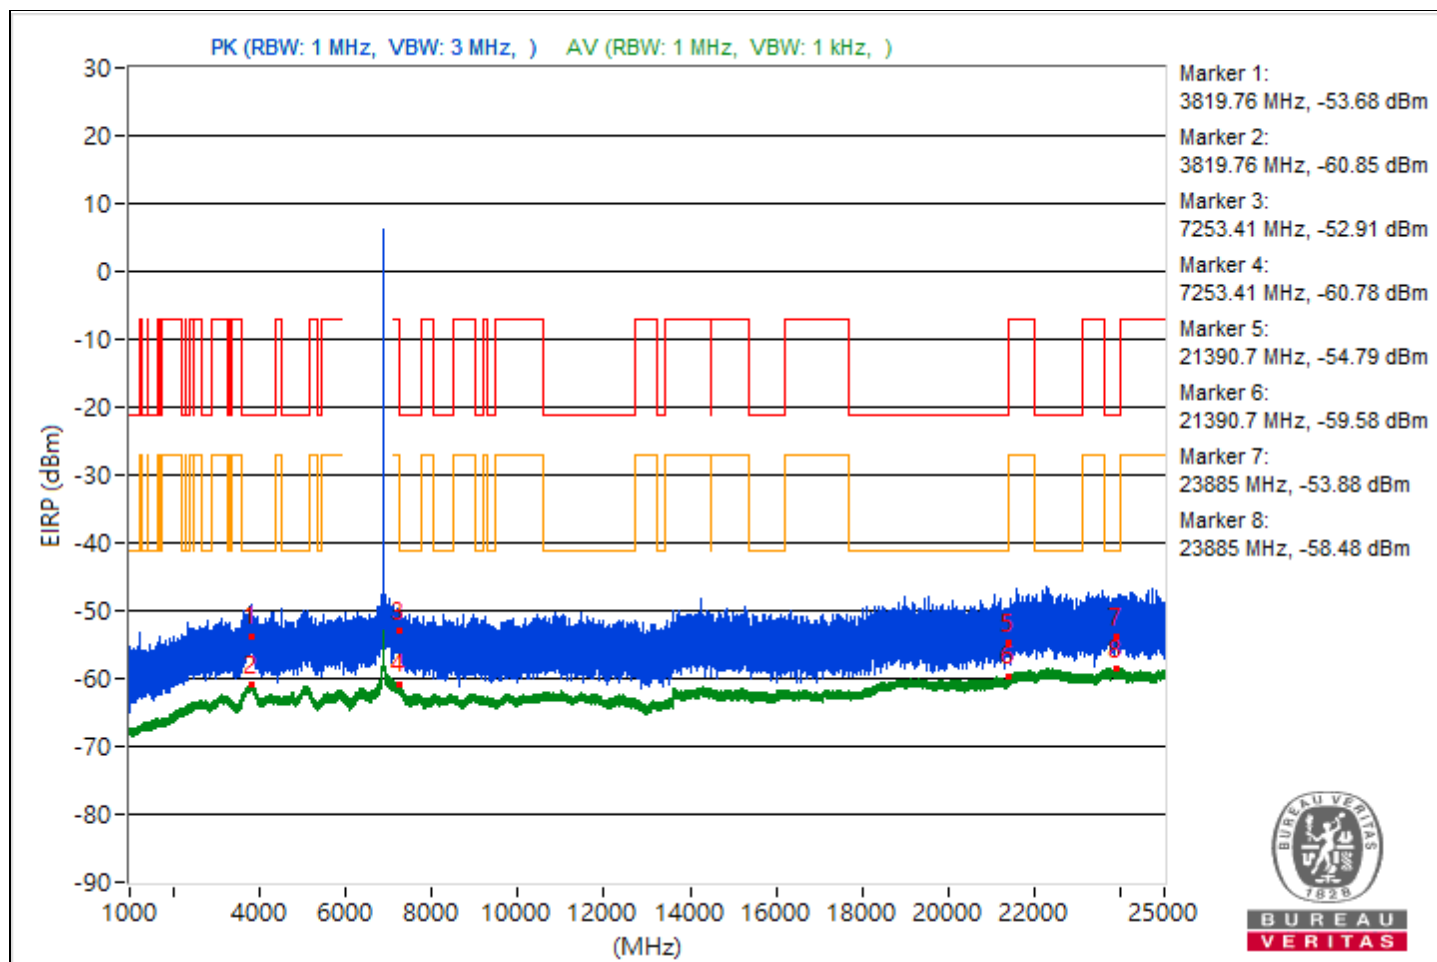


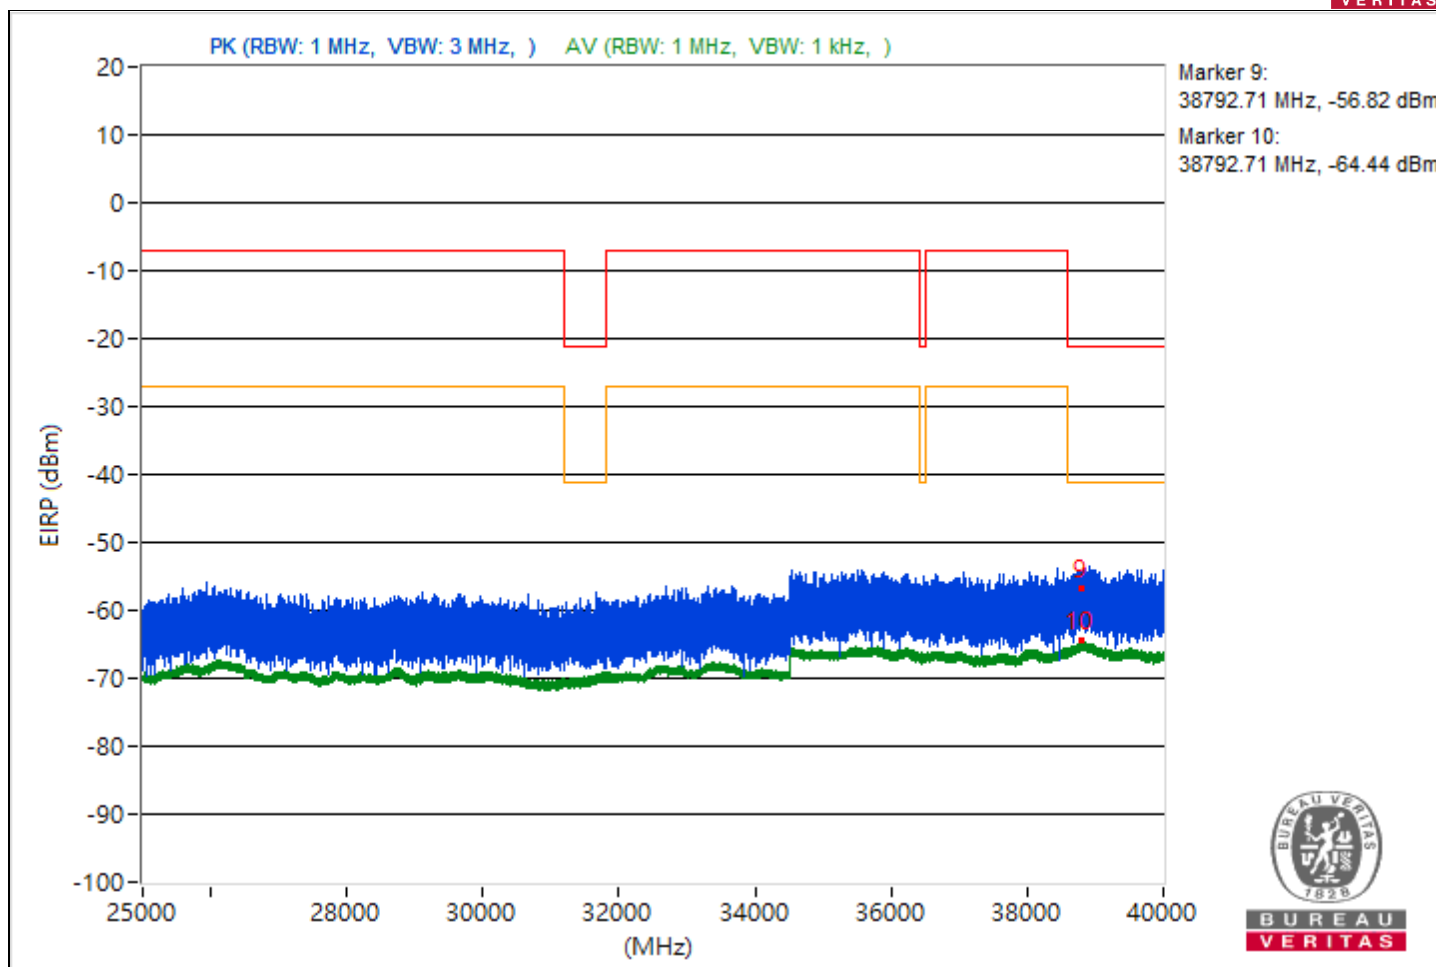


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.29	39.49 PK	74	-34.51	-60.69	4.92	-55.77
2	3805.29	34.62 AV	54	-19.38	-65.56	4.92	-60.64
3	7250.46	42.34 PK	74	-31.66	-57.84	4.92	-52.92
4	7250.46	35.12 AV	54	-18.88	-65.06	4.92	-60.14
5	21150.4	41.14 PK	74	-32.86	-59.04	4.92	-54.12
6	21150.4	35.41 AV	54	-18.59	-64.77	4.92	-59.85
7	22429.3	43.53 PK	74	-30.47	-56.65	4.92	-51.73
8	22429.3	36.69 AV	54	-17.31	-63.49	4.92	-58.57
9	38869.96	35.7 PK	74	-38.3	-64.48	4.92	-59.56
10	38869.96	30.61 AV	54	-23.39	-69.57	4.92	-64.65

Note: Margin value = Emission Level - Limit value

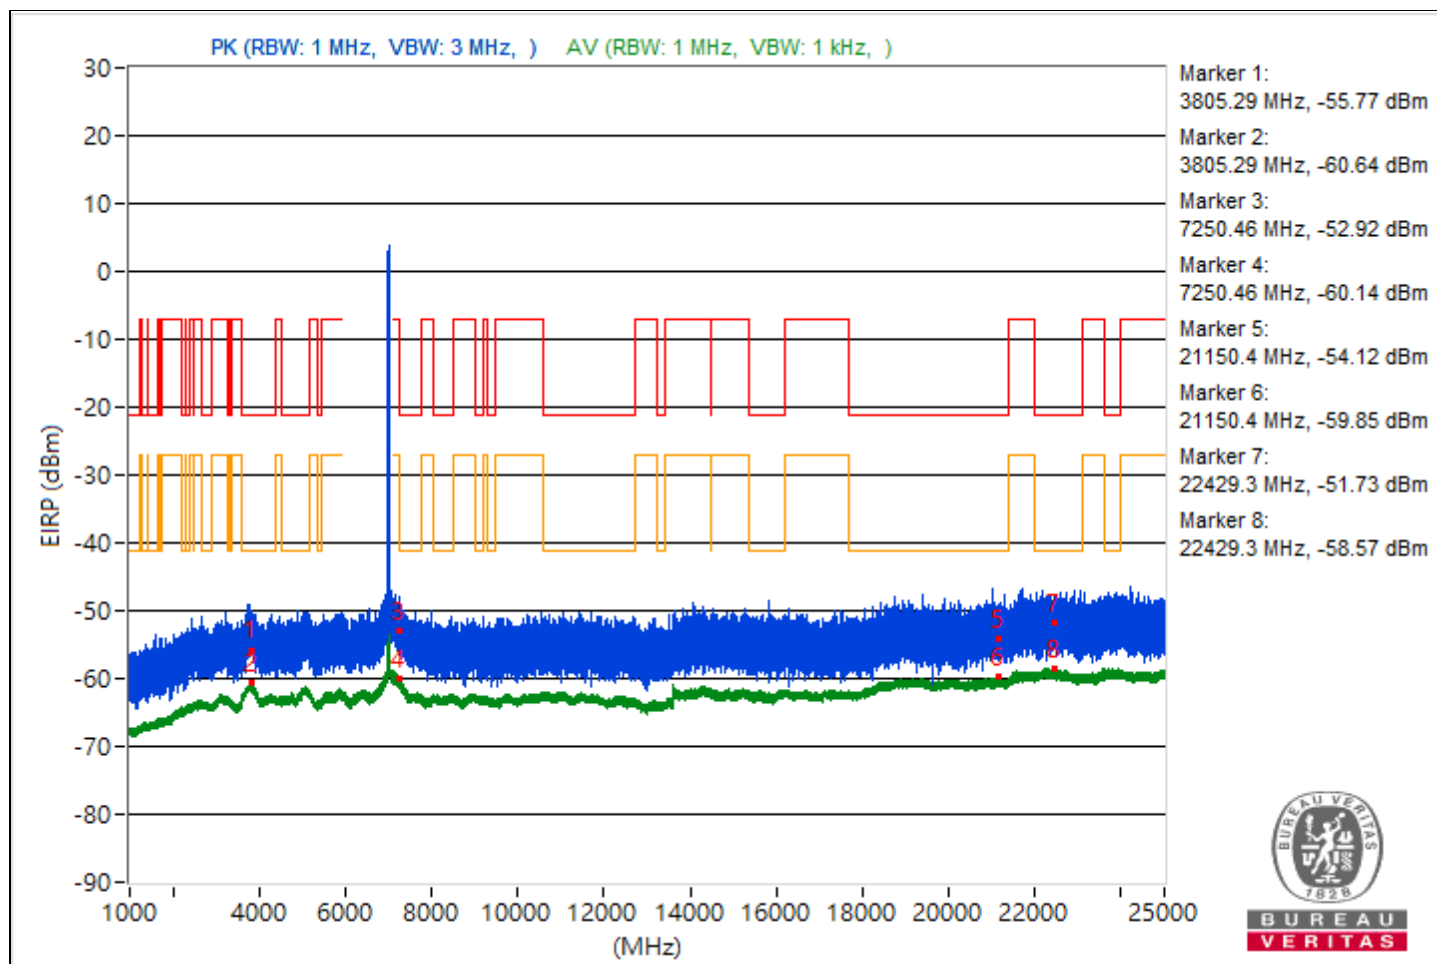


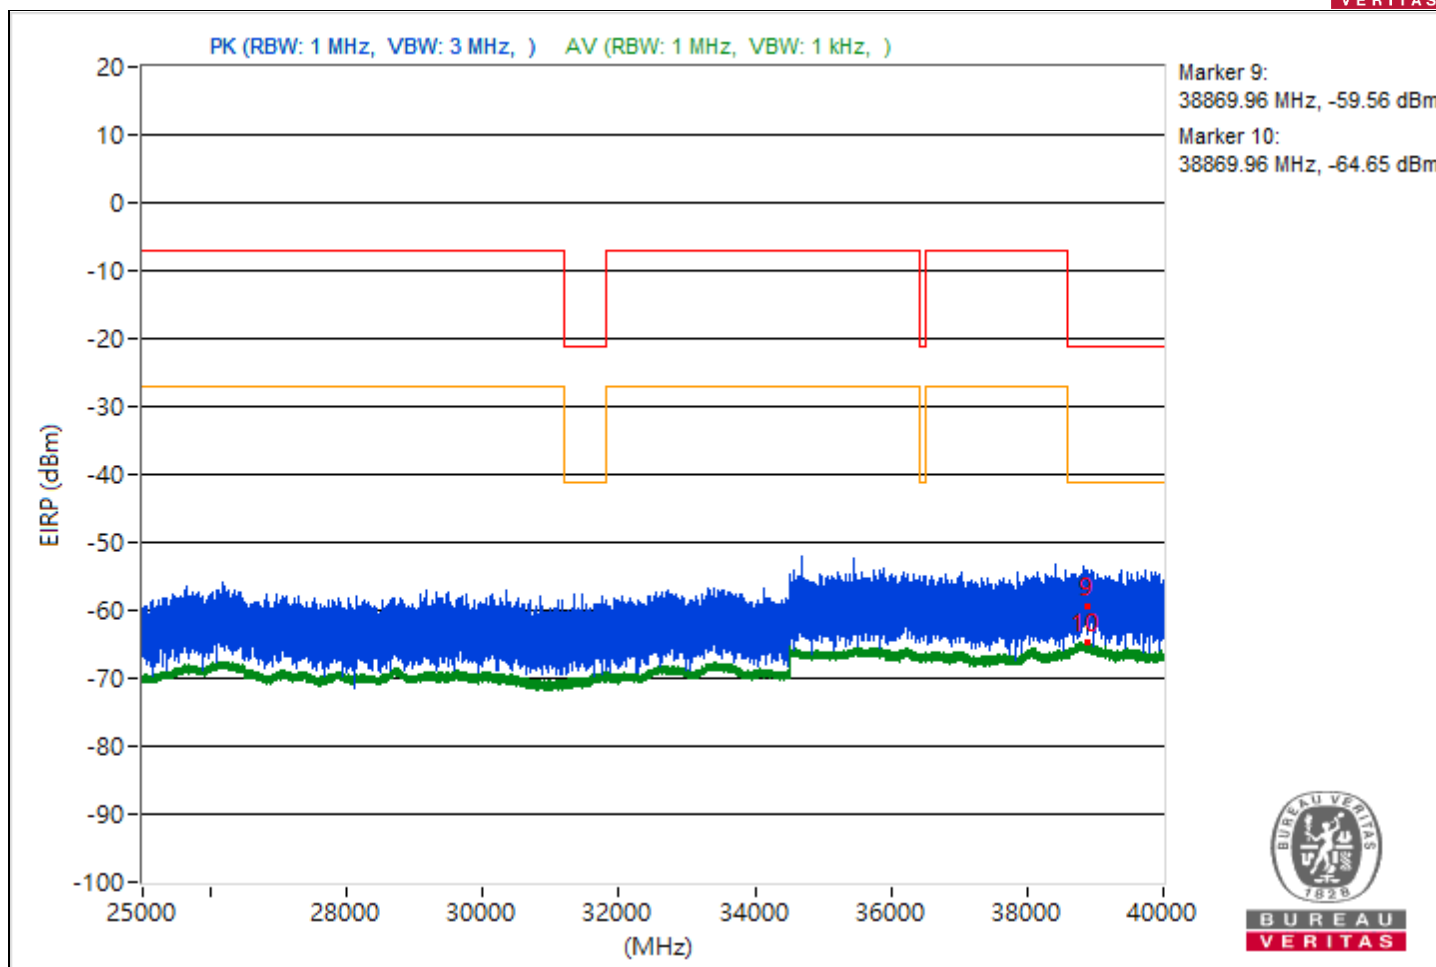


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.08	43.75 PK	74	-30.25	-56.43	4.92	-51.51
2	3807.08	34.57 AV	54	-19.43	-65.61	4.92	-60.69
3	7274.49	39.62 PK	74	-34.38	-60.56	4.92	-55.64
4	7274.49	36.28 AV	54	-17.72	-63.9	4.92	-58.98
5	21394.5	42.41 PK	74	-31.59	-57.77	4.92	-52.85
6	21394.5	35.54 AV	54	-18.46	-64.64	4.92	-59.72
7	23739.1	44.87 PK	74	-29.13	-55.31	4.92	-50.39
8	23739.1	36.74 AV	54	-17.26	-63.44	4.92	-58.52
9	38804.27	34.16 PK	74	-39.84	-66.02	4.92	-61.1
10	38804.27	30.61 AV	54	-23.39	-69.57	4.92	-64.65

Note: Margin value = Emission Level - Limit value

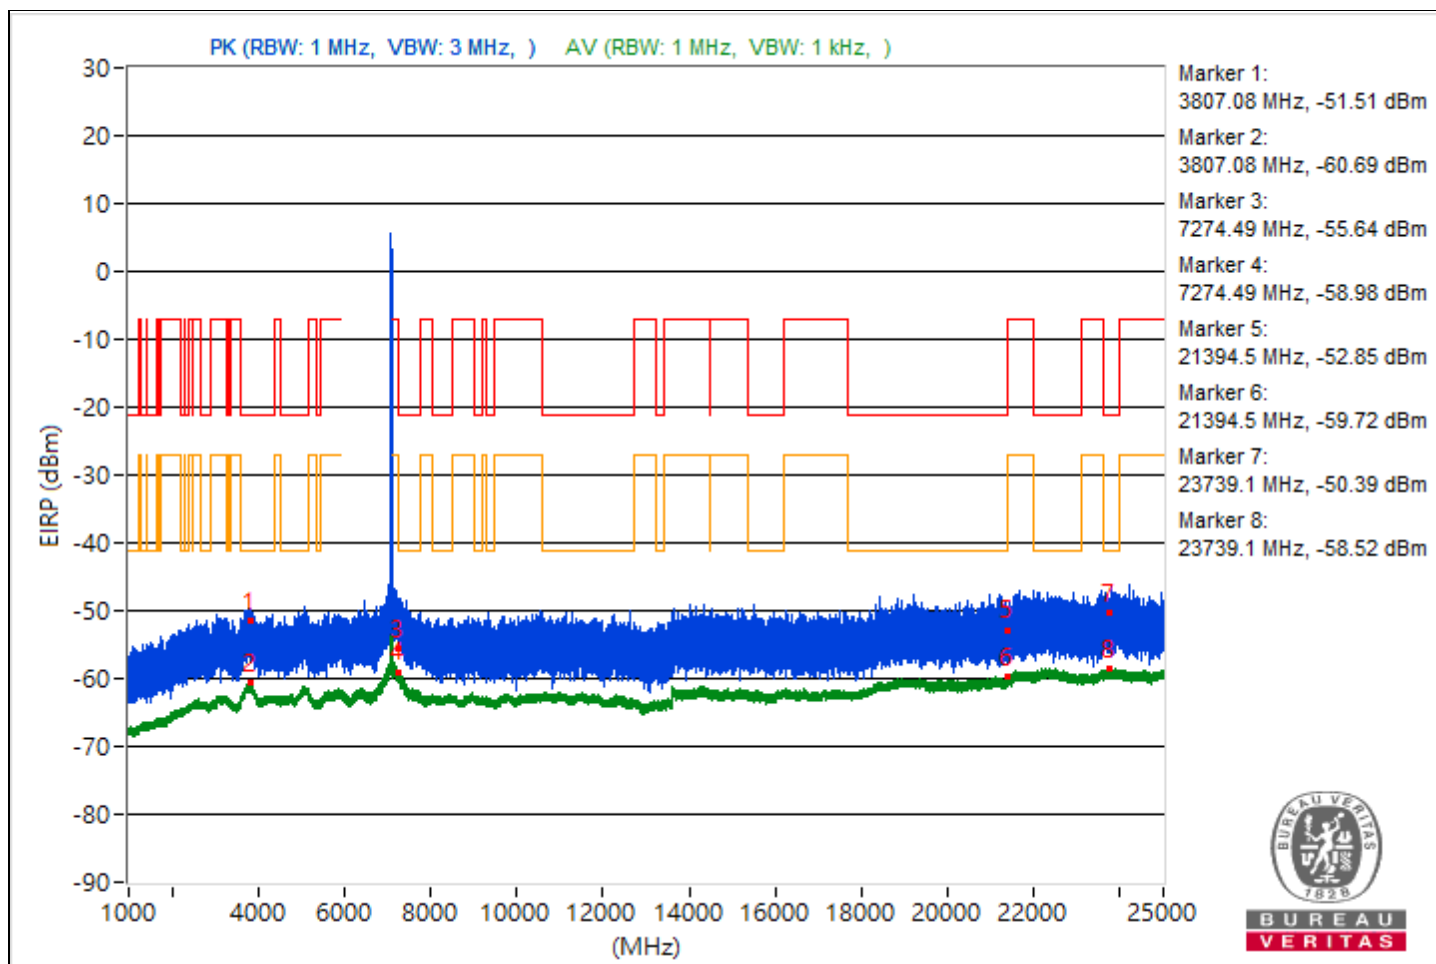


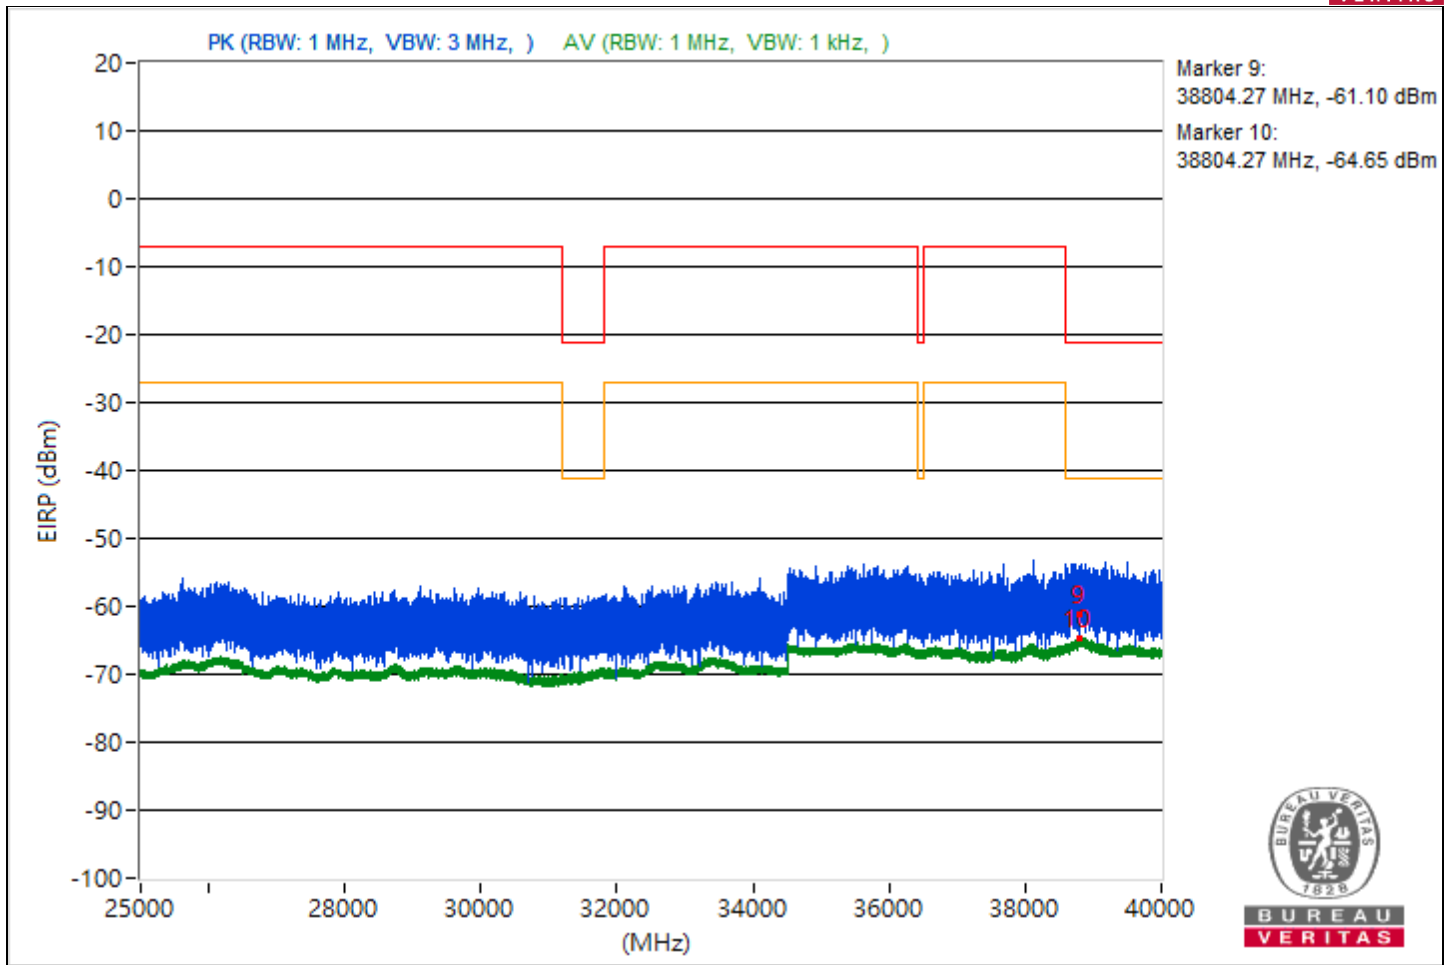


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3830.57	41.32 PK	74	-32.68	-58.86	4.92	-53.94
2	3830.57	34.49 AV	54	-19.51	-65.69	4.92	-60.77
3	14494.49	41.44 PK	74	-32.56	-58.74	4.92	-53.82
4	14494.49	33.54 AV	54	-20.46	-66.64	4.92	-61.72
5	21397.9	42.5 PK	74	-31.5	-57.68	4.92	-52.76
6	21397.9	35.41 AV	54	-18.59	-64.77	4.92	-59.85
7	23983.5	44.4 PK	74	-29.6	-55.78	4.92	-50.86
8	23983.5	36.86 AV	54	-17.14	-63.32	4.92	-58.4
9	38836.44	37.21 PK	74	-36.79	-62.97	4.92	-58.05
10	38836.44	30.6 AV	54	-23.4	-69.58	4.92	-64.66

Note: Margin value = Emission Level - Limit value

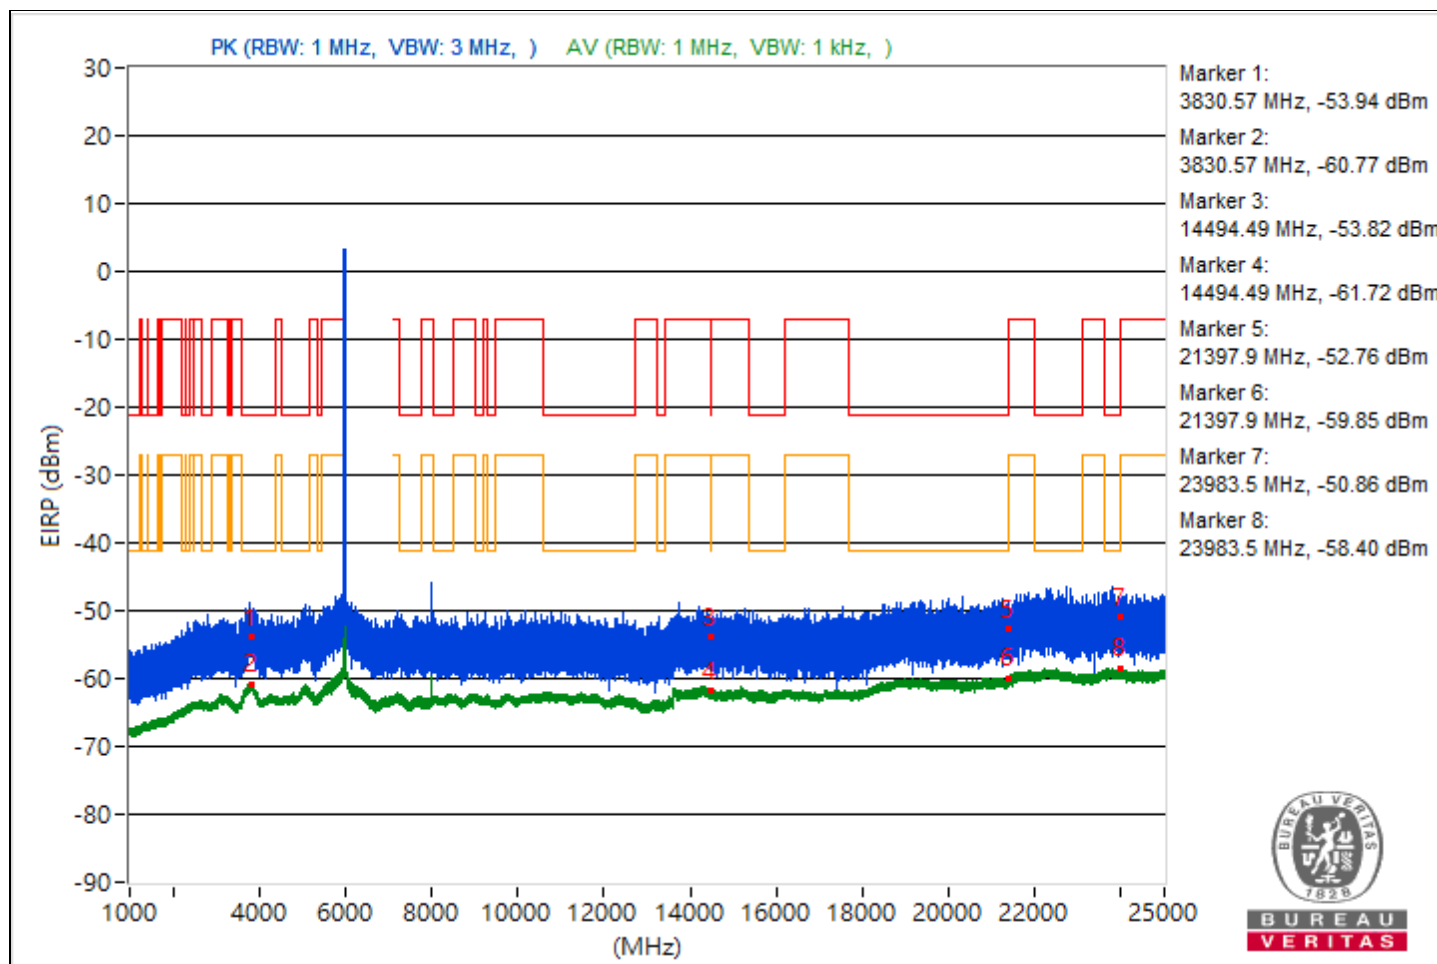


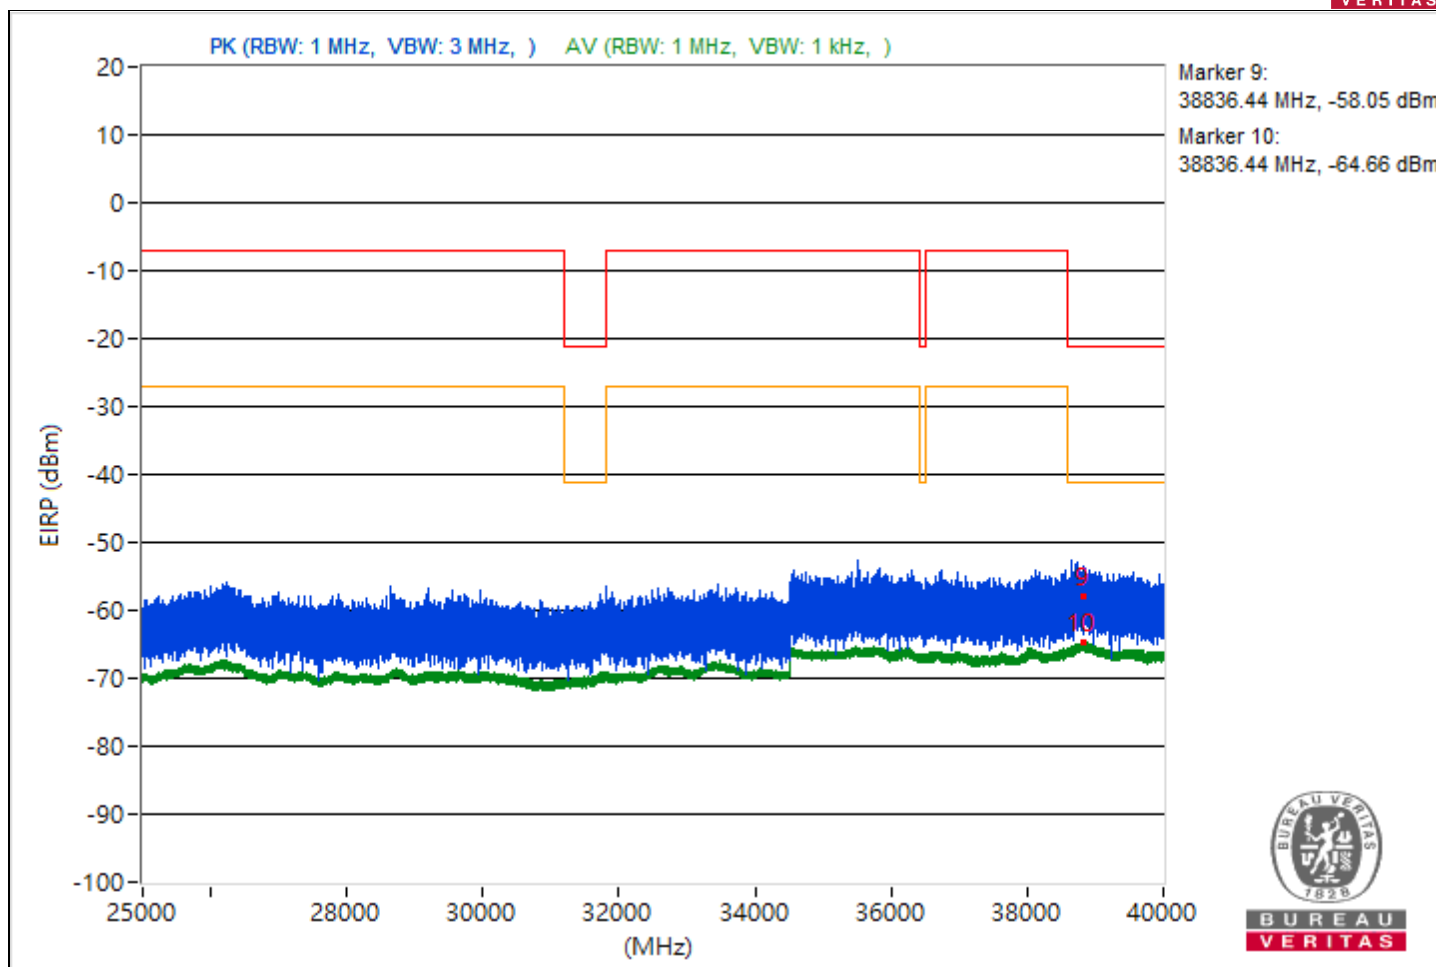


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3785.14	41.52 PK	74	-32.48	-58.66	4.92	-53.74
2	3785.14	34.45 AV	54	-19.55	-65.73	4.92	-60.81
3	8193.24	46.4 PK	74	-27.6	-53.78	4.92	-48.86
4	8193.24	44.89 AV	54	-9.11	-55.29	4.92	-50.37
5	21398.9	39.06 PK	74	-34.94	-61.12	4.92	-56.2
6	21398.9	35.5 AV	54	-18.5	-64.68	4.92	-59.76
7	23792.9	45.44 PK	74	-28.56	-54.74	4.92	-49.82
8	23792.9	36.85 AV	54	-17.15	-63.33	4.92	-58.41
9	38817.78	36.65 PK	74	-37.35	-63.53	4.92	-58.61
10	38817.78	30.55 AV	54	-23.45	-69.63	4.92	-64.71

Note: Margin value = Emission Level - Limit value

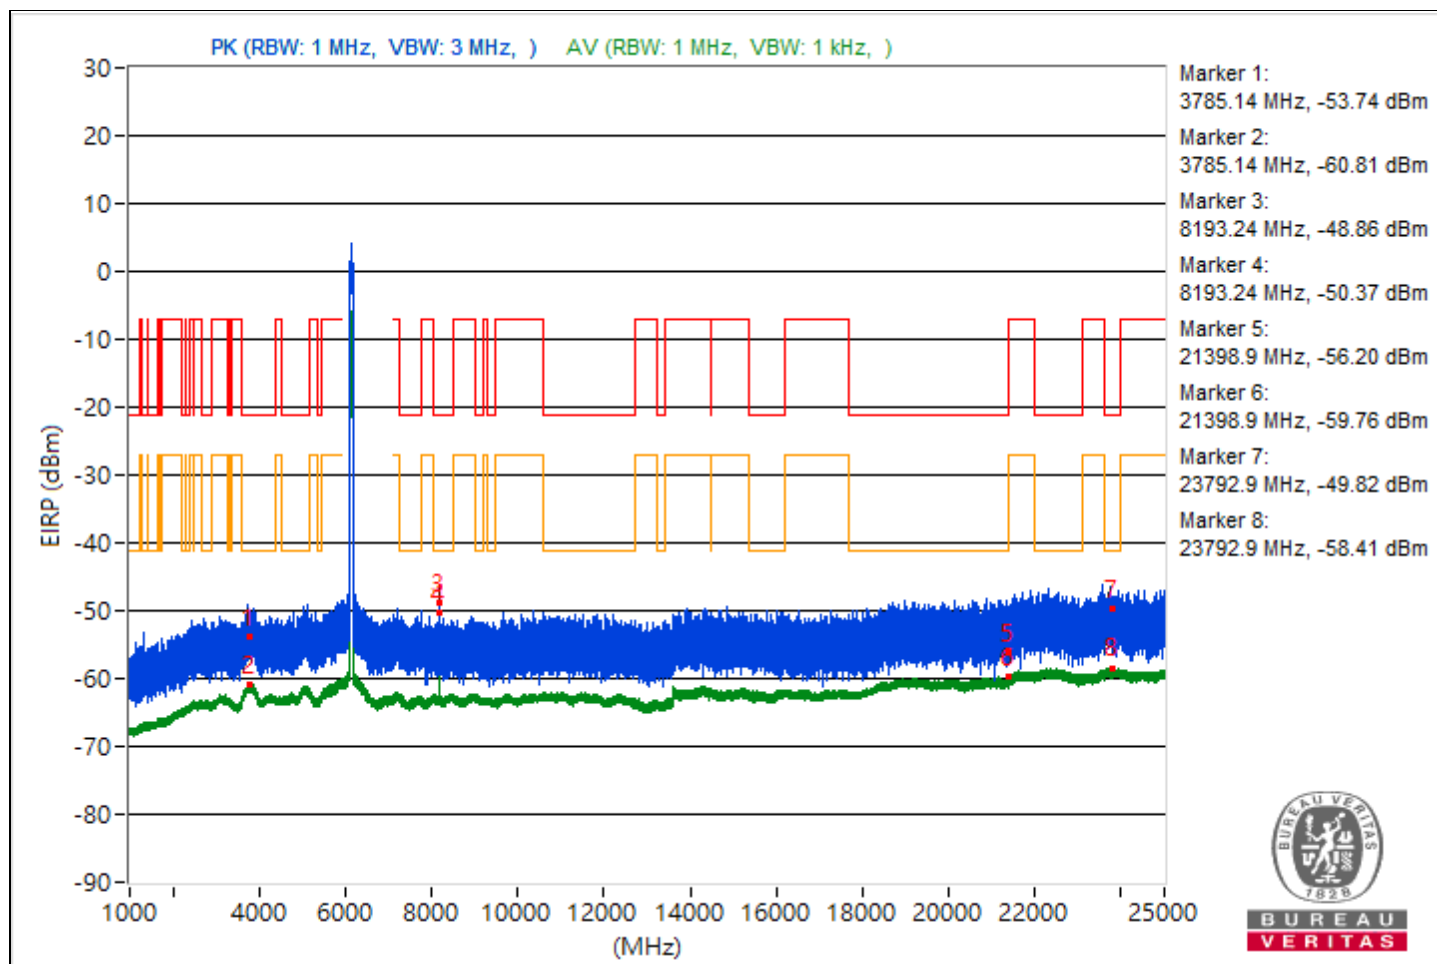


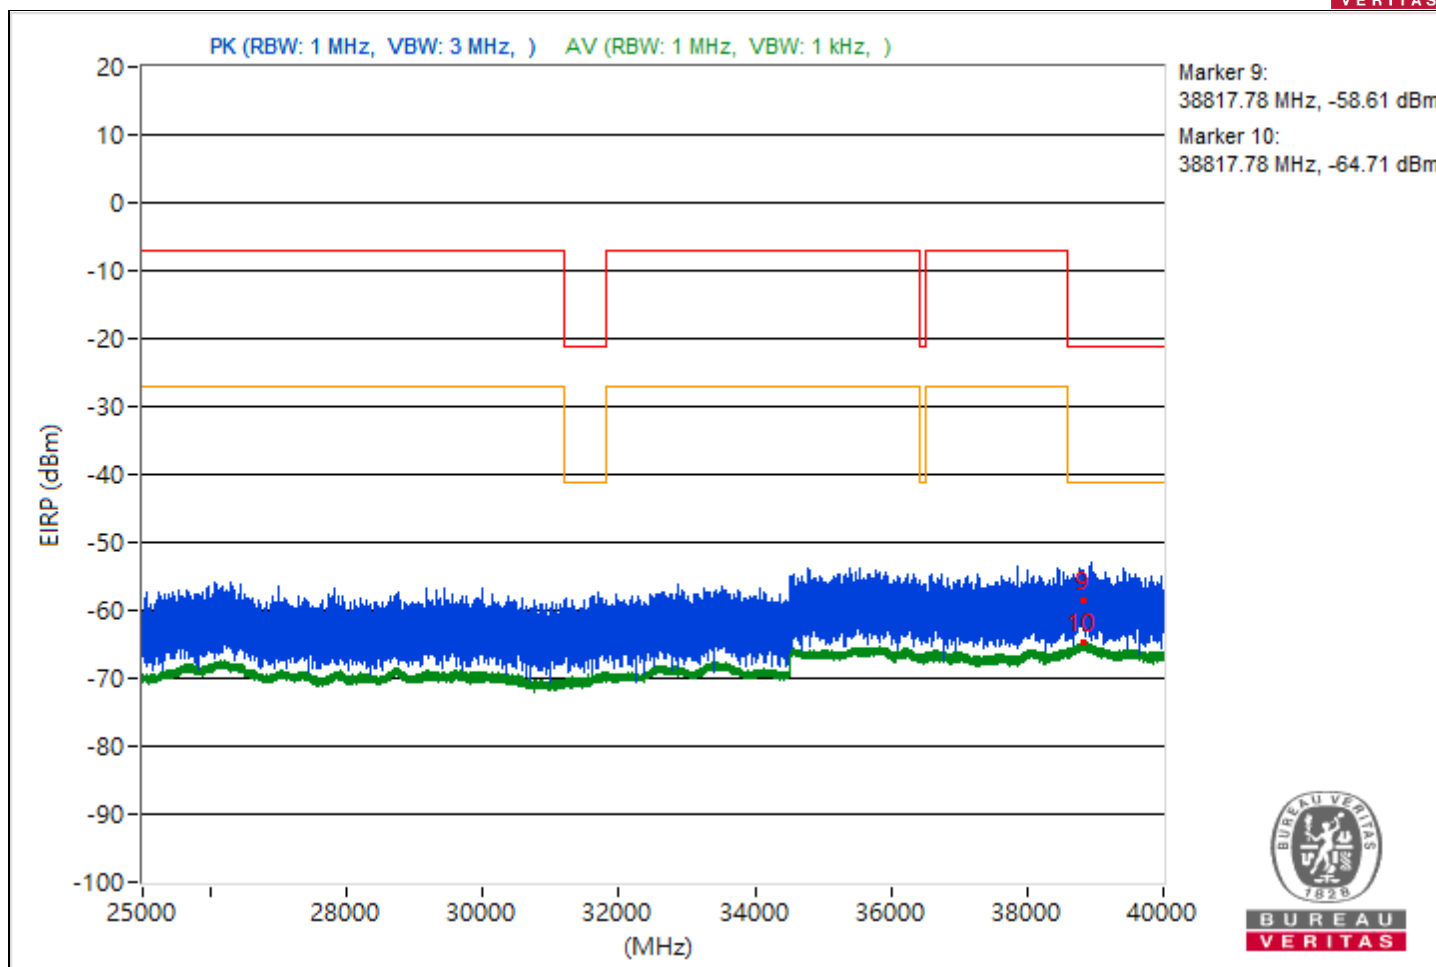


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3816.96	41 PK	74	-33	-59.18	4.92	-54.26
2	3816.96	34.45 AV	54	-19.55	-65.73	4.92	-60.81
3	14487.38	39.87 PK	74	-34.13	-60.31	4.92	-55.39
4	14487.38	33.62 AV	54	-20.38	-66.56	4.92	-61.64
5	21168.6	40.64 PK	74	-33.36	-59.54	4.92	-54.62
6	21168.6	35.53 AV	54	-18.47	-64.65	4.92	-59.73
7	22215.1	42.39 PK	74	-31.61	-57.79	4.92	-52.87
8	22215.1	36.78 AV	54	-17.22	-63.4	4.92	-58.48
9	38864.89	37.47 PK	74	-36.53	-62.71	4.92	-57.79
10	38864.89	30.55 AV	54	-23.45	-69.63	4.92	-64.71

Note: Margin value = Emission Level - Limit value

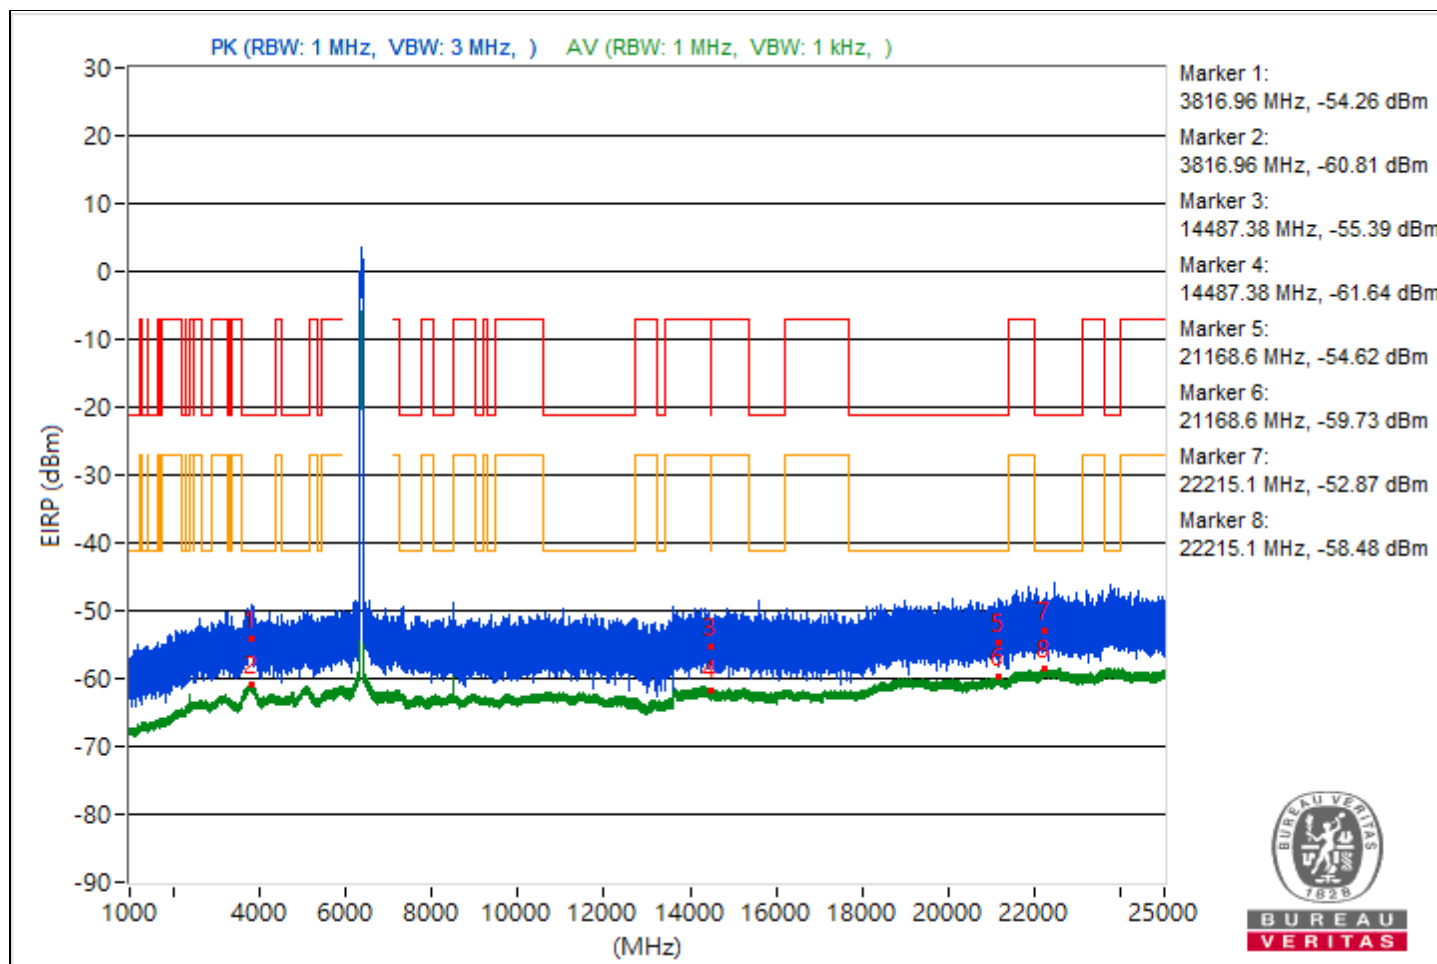


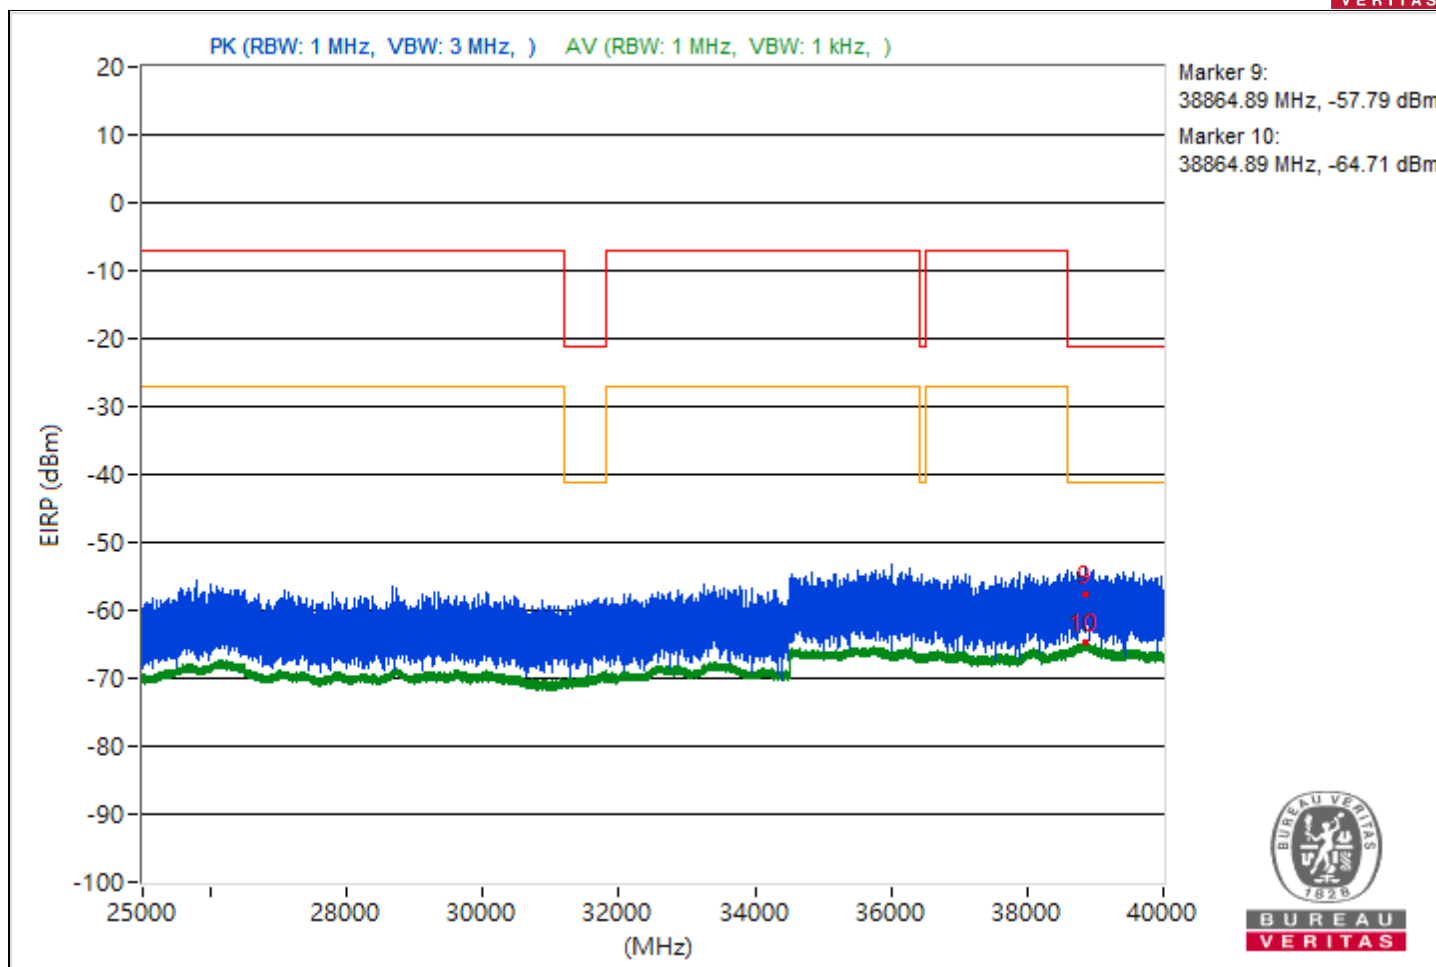


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.02	42.64 PK	74	-31.36	-57.54	4.92	-52.62
2	3802.02	34.67 AV	54	-19.33	-65.51	4.92	-60.59
3	14472.27	39.87 PK	74	-34.13	-60.31	4.92	-55.39
4	14472.27	33.75 AV	54	-20.25	-66.43	4.92	-61.51
5	21059.9	42.8 PK	74	-31.2	-57.38	4.92	-52.46
6	21059.9	35.55 AV	54	-18.45	-64.63	4.92	-59.71
7	23945.2	42.72 PK	74	-31.28	-57.46	4.92	-52.54
8	23945.2	36.96 AV	54	-17.04	-63.22	4.92	-58.3
9	38850.76	33.19 PK	74	-40.81	-66.99	4.92	-62.07
10	38850.76	30.52 AV	54	-23.48	-69.66	4.92	-64.74

Note: Margin value = Emission Level - Limit value

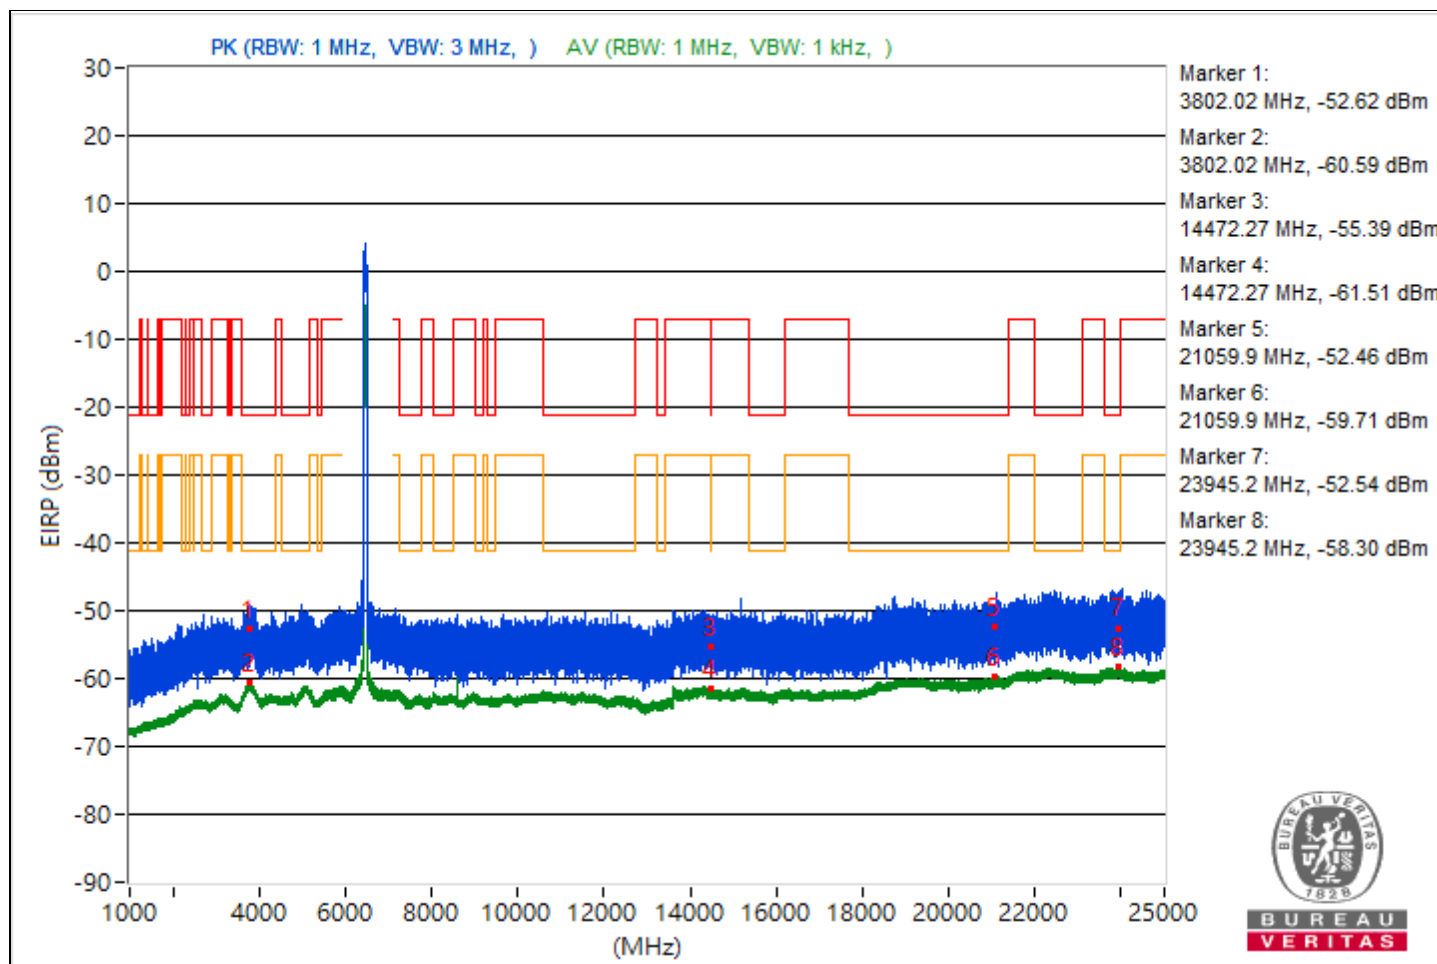


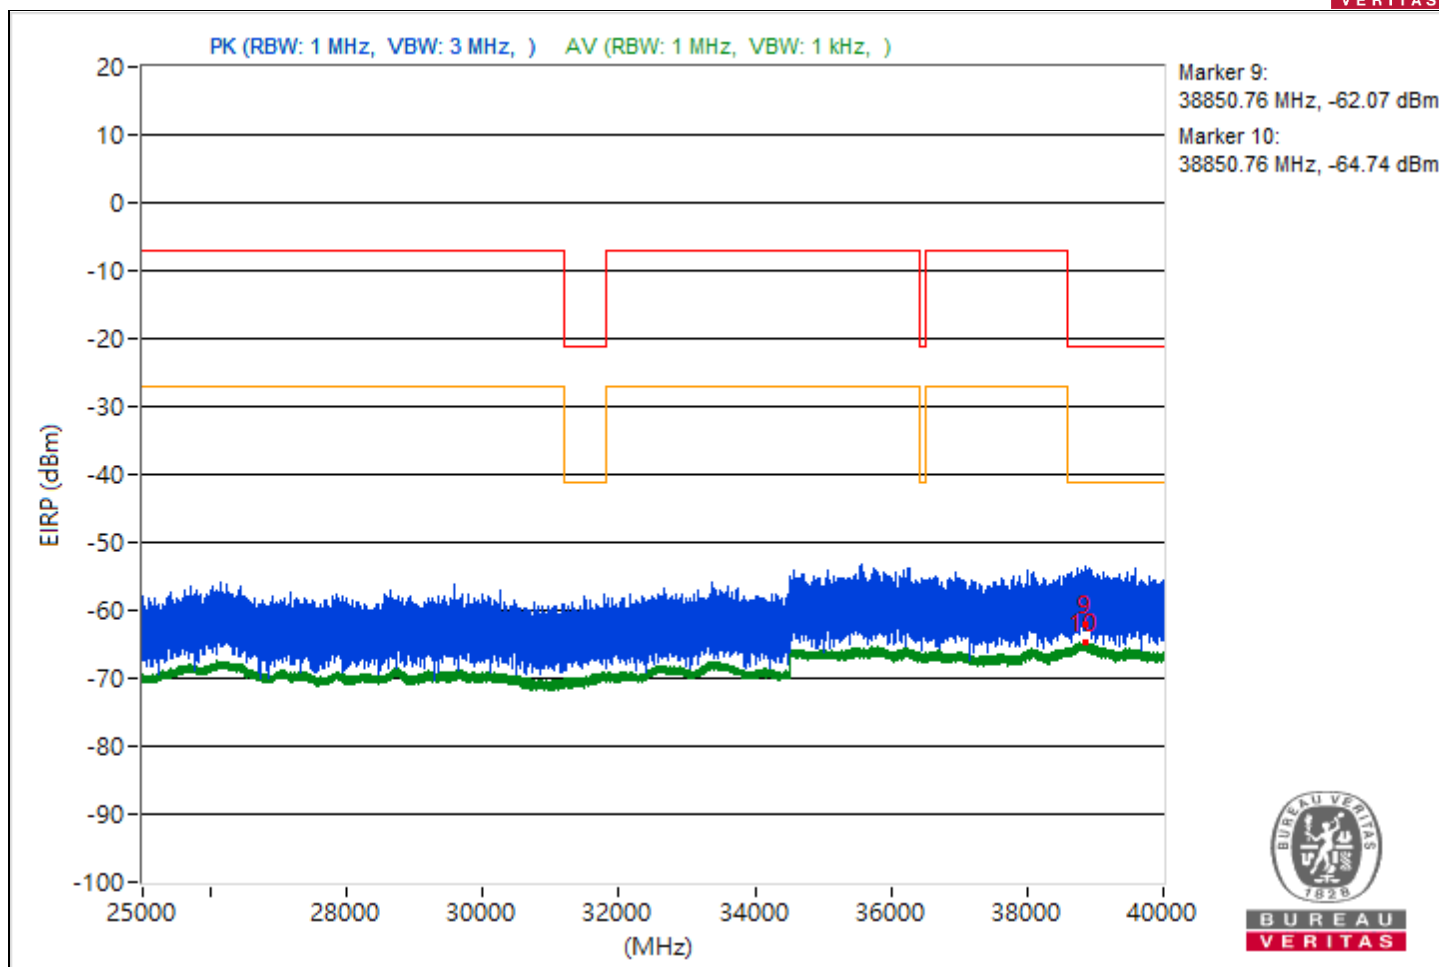


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.12	42.11 PK	74	-31.89	-58.07	4.92	-53.15
2	3790.12	34.5 AV	54	-19.5	-65.68	4.92	-60.76
3	14475.56	41.03 PK	74	-32.97	-59.15	4.92	-54.23
4	14475.56	33.65 AV	54	-20.35	-66.53	4.92	-61.61
5	21177.1	42.7 PK	74	-31.3	-57.48	4.92	-52.56
6	21177.1	35.57 AV	54	-18.43	-64.61	4.92	-59.69
7	22216.9	44.65 PK	74	-29.35	-55.53	4.92	-50.61
8	22216.9	36.83 AV	54	-17.17	-63.35	4.92	-58.43
9	38867.64	35.99 PK	74	-38.01	-64.19	4.92	-59.27
10	38867.64	30.57 AV	54	-23.43	-69.61	4.92	-64.69

Note: Margin value = Emission Level - Limit value

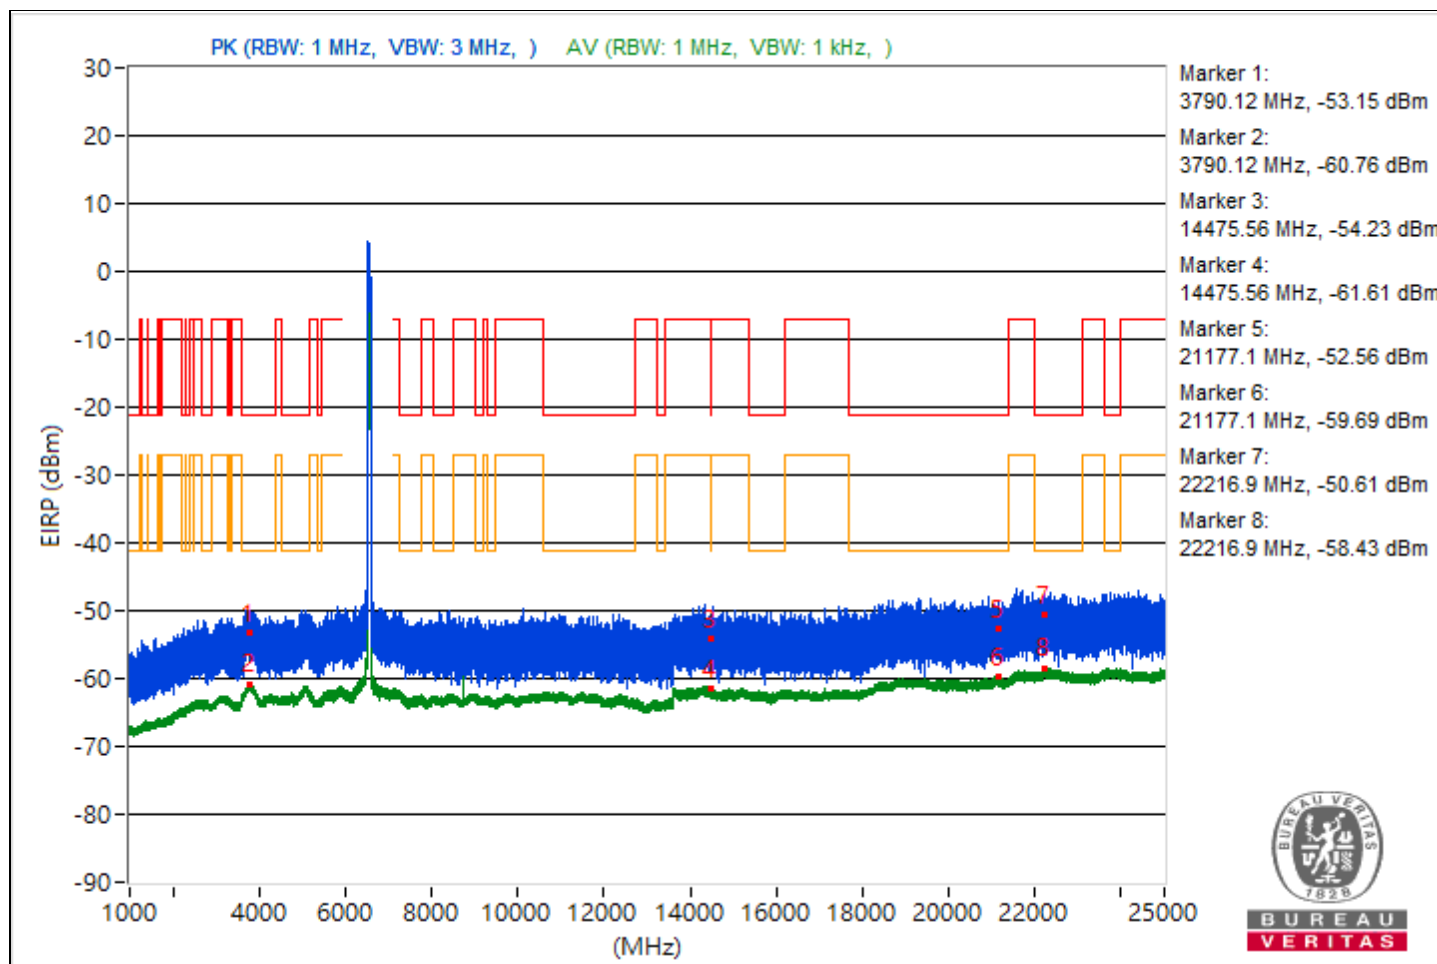


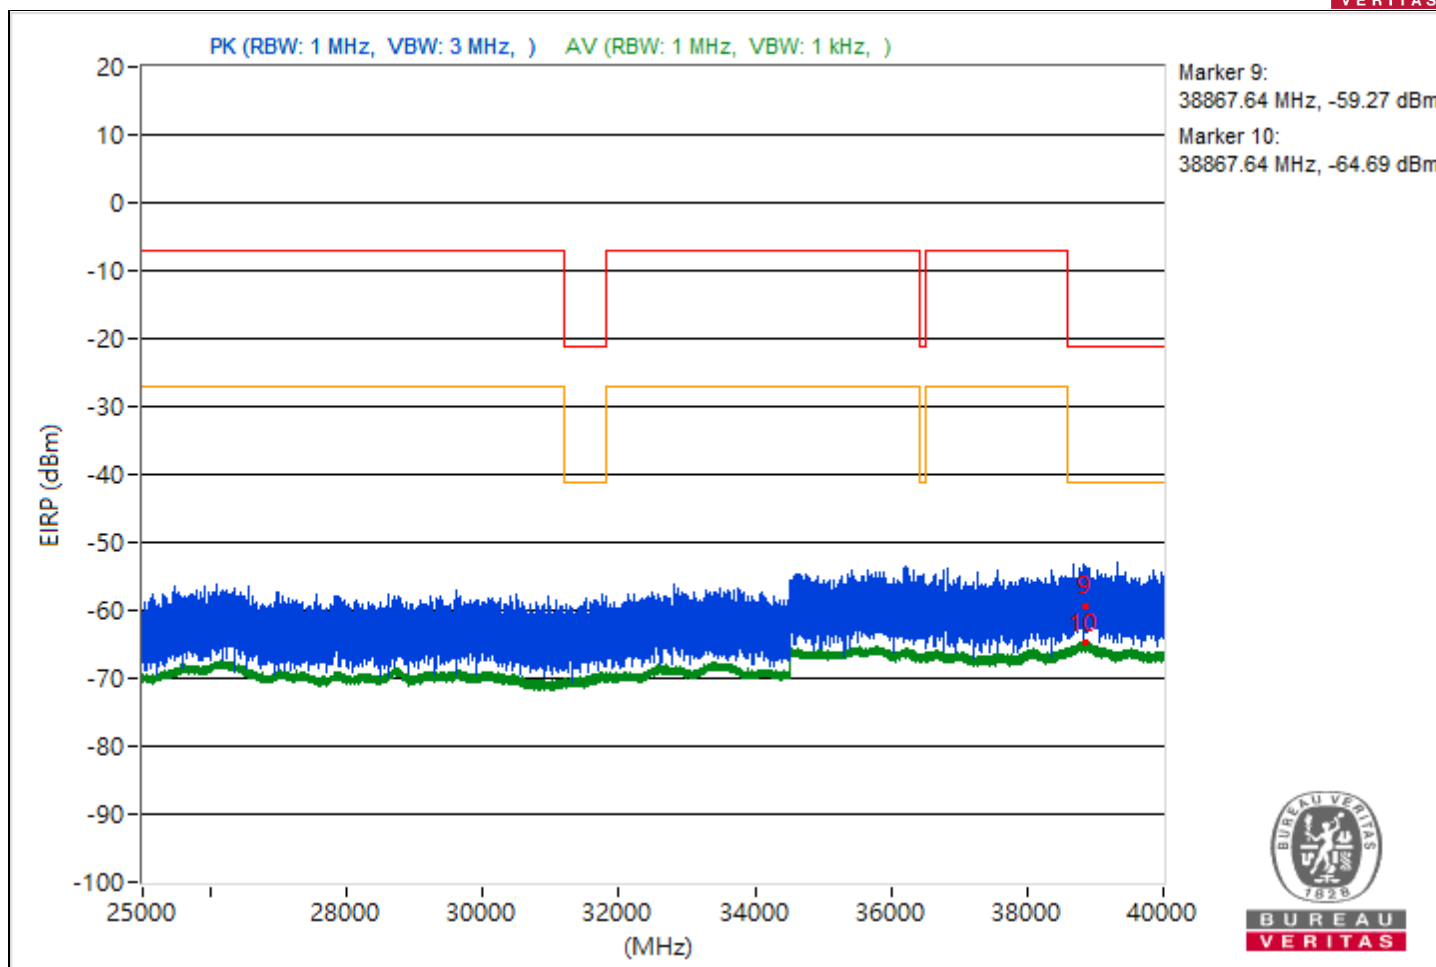


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.89	41.81 PK	74	-32.19	-58.37	4.92	-53.45
2	3817.89	34.51 AV	54	-19.49	-65.67	4.92	-60.75
3	7264.84	41.05 PK	74	-32.95	-59.13	4.92	-54.21
4	7264.84	33.77 AV	54	-20.23	-66.41	4.92	-61.49
5	21157.6	43.59 PK	74	-30.41	-56.59	4.92	-51.67
6	21157.6	35.46 AV	54	-18.54	-64.72	4.92	-59.8
7	22203.3	45.34 PK	74	-28.66	-54.84	4.92	-49.92
8	22203.3	36.66 AV	54	-17.34	-63.52	4.92	-58.6
9	38851.29	39.19 PK	74	-34.81	-60.99	4.92	-56.07
10	38851.29	30.55 AV	54	-23.45	-69.63	4.92	-64.71

Note: Margin value = Emission Level - Limit value

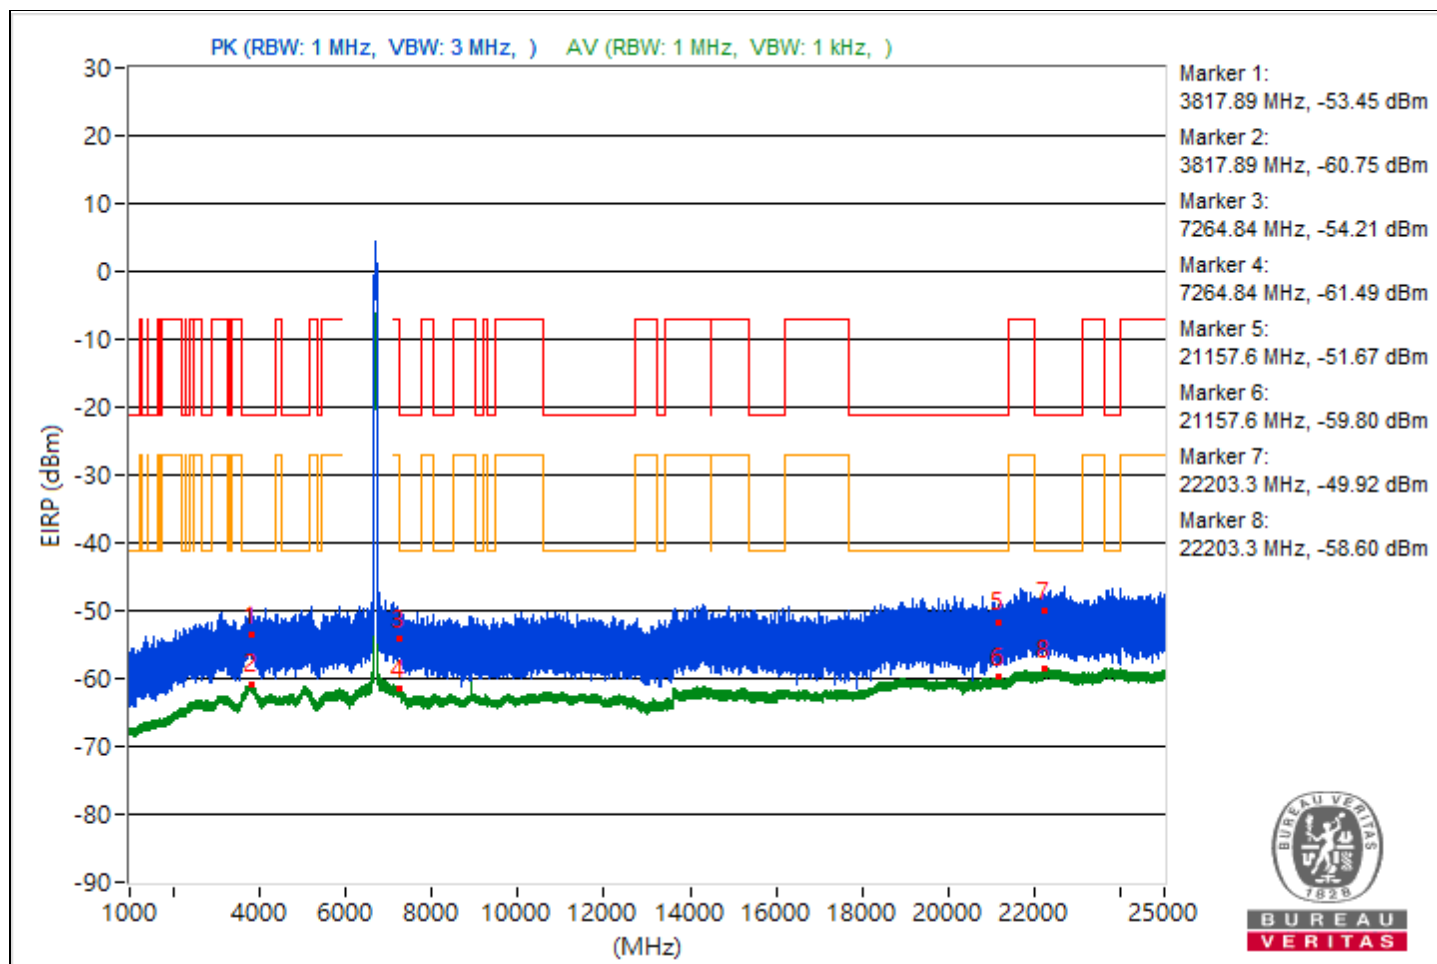


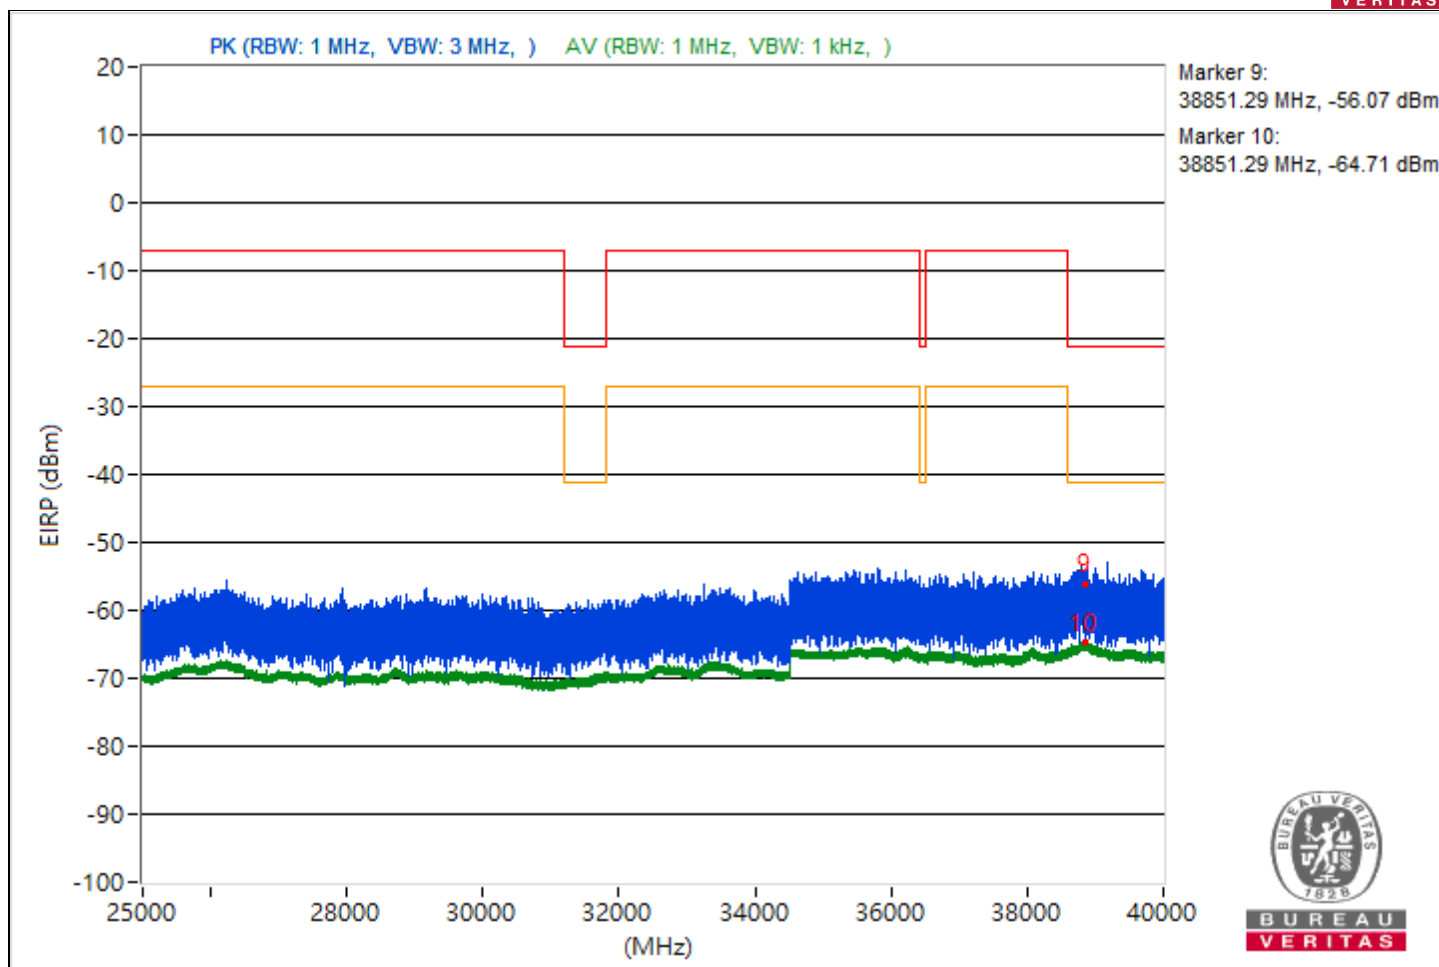


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3818.2	42.91 PK	74	-31.09	-57.27	4.92	-52.35
2	3818.2	34.63 AV	54	-19.37	-65.55	4.92	-60.63
3	7256.13	42.35 PK	74	-31.65	-57.83	4.92	-52.91
4	7256.13	34.17 AV	54	-19.83	-66.01	4.92	-61.09
5	21136.1	42.05 PK	74	-31.95	-58.13	4.92	-53.21
6	21136.1	35.42 AV	54	-18.58	-64.76	4.92	-59.84
7	22403.8	42.69 PK	74	-31.31	-57.49	4.92	-52.57
8	22403.8	36.81 AV	54	-17.19	-63.37	4.92	-58.45
9	38849.69	36.46 PK	74	-37.54	-63.72	4.92	-58.8
10	38849.69	30.67 AV	54	-23.33	-69.51	4.92	-64.59

Note: Margin value = Emission Level - Limit value

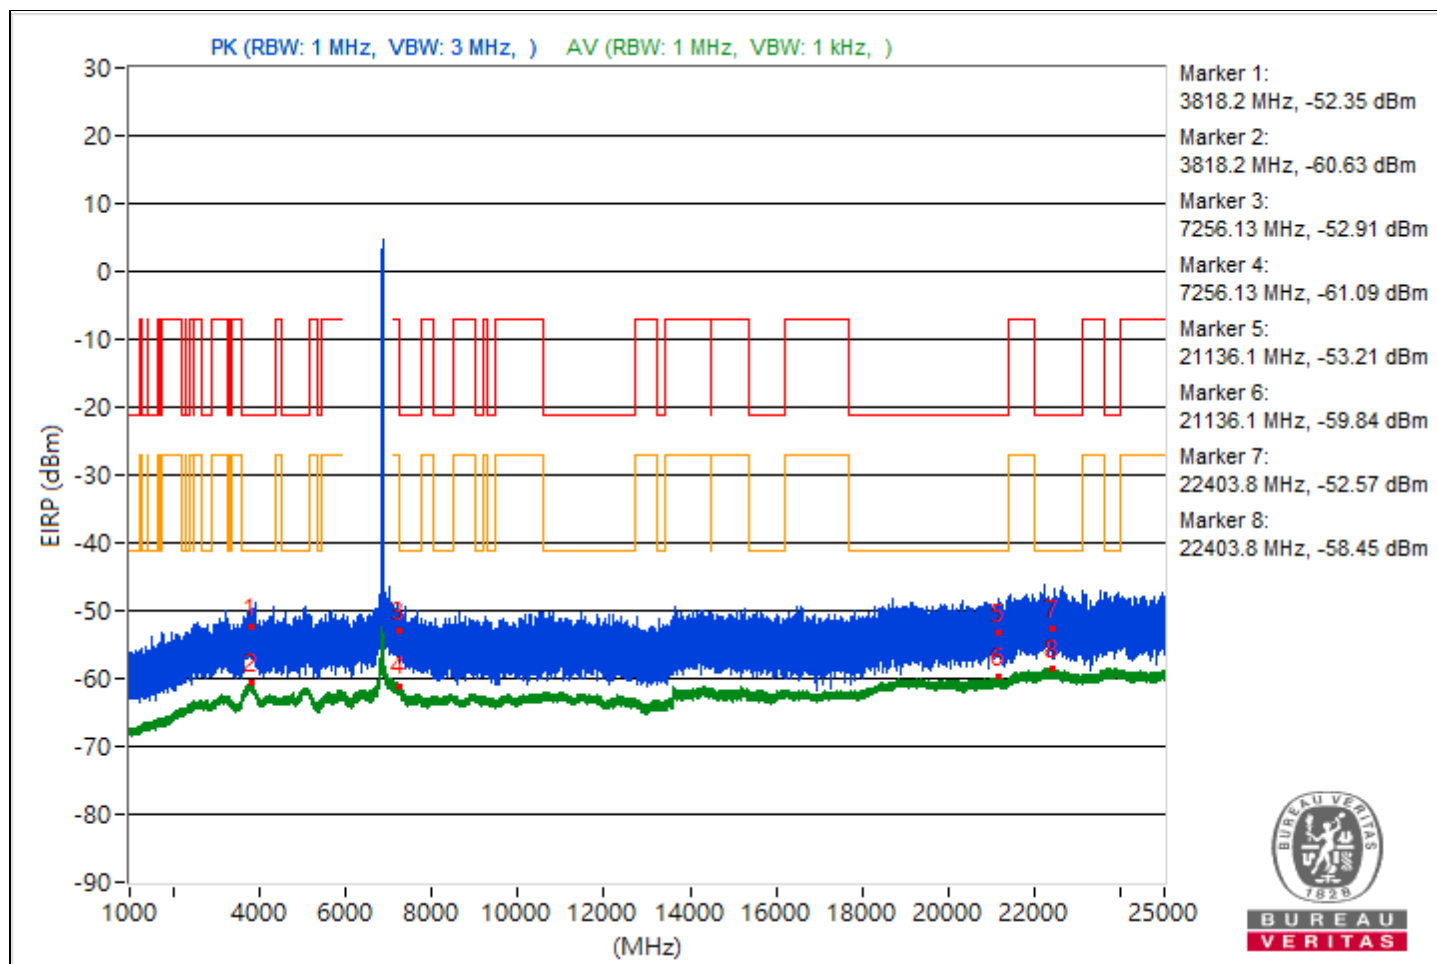


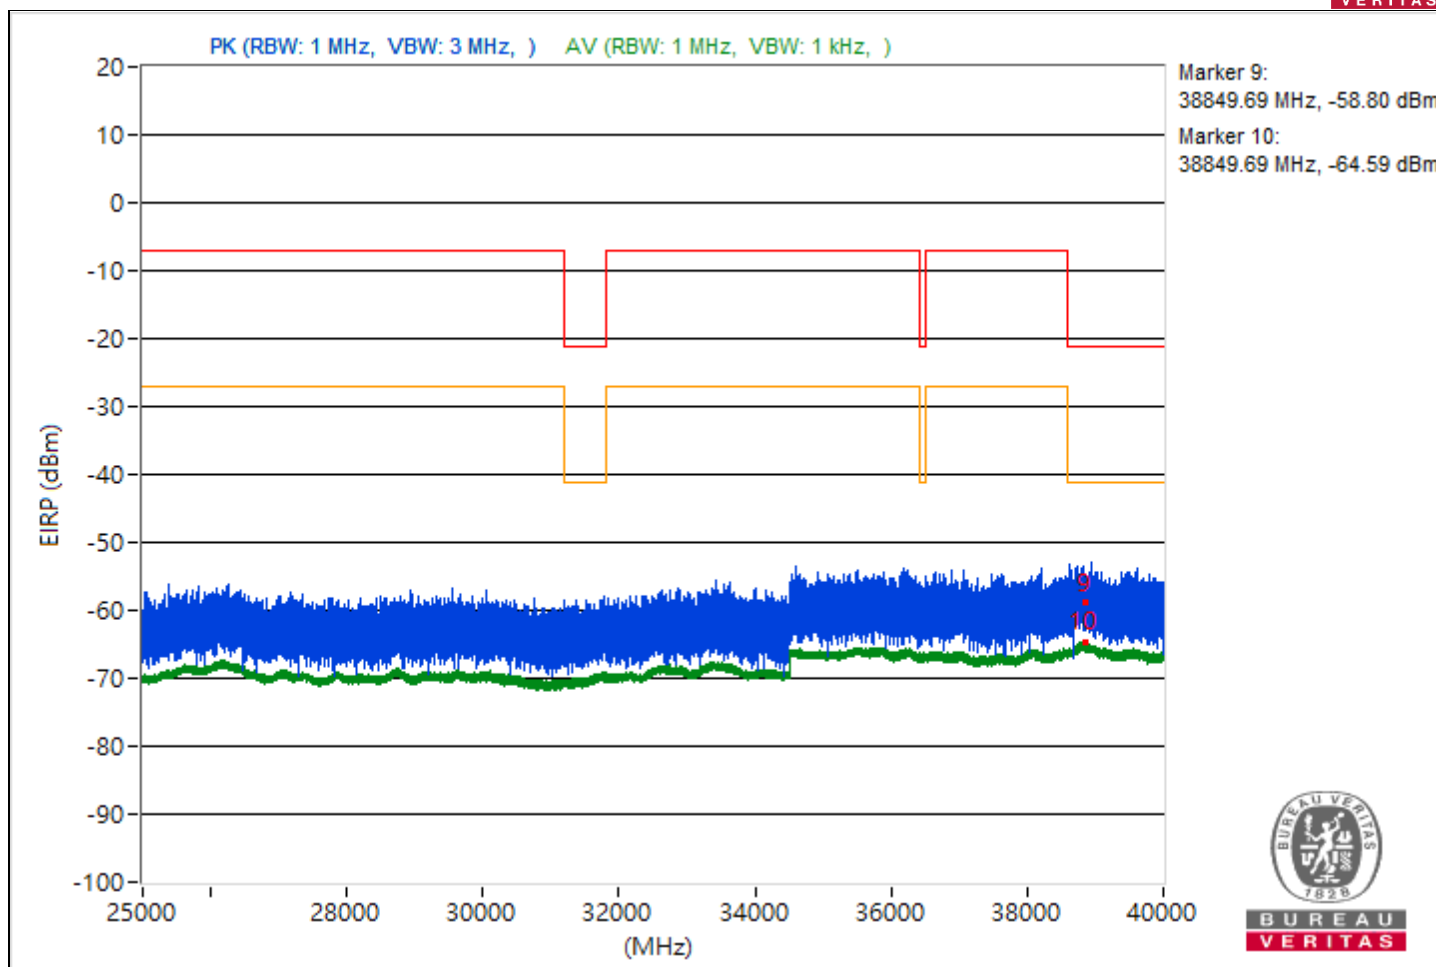


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.43	40.81 PK	74	-33.19	-59.37	4.92	-54.45
2	3804.43	34.42 AV	54	-19.58	-65.76	4.92	-60.84
3	7251.7	41.58 PK	74	-32.42	-58.6	4.92	-53.68
4	7251.7	34.93 AV	54	-19.07	-65.25	4.92	-60.33
5	21148.7	41.63 PK	74	-32.37	-58.55	4.92	-53.63
6	21148.7	35.38 AV	54	-18.62	-64.8	4.92	-59.88
7	22270.4	42.46 PK	74	-31.54	-57.72	4.92	-52.8
8	22270.4	36.86 AV	54	-17.14	-63.32	4.92	-58.4
9	38865.07	37.45 PK	74	-36.55	-62.73	4.92	-57.81
10	38865.07	30.6 AV	54	-23.4	-69.58	4.92	-64.66

Note: Margin value = Emission Level - Limit value

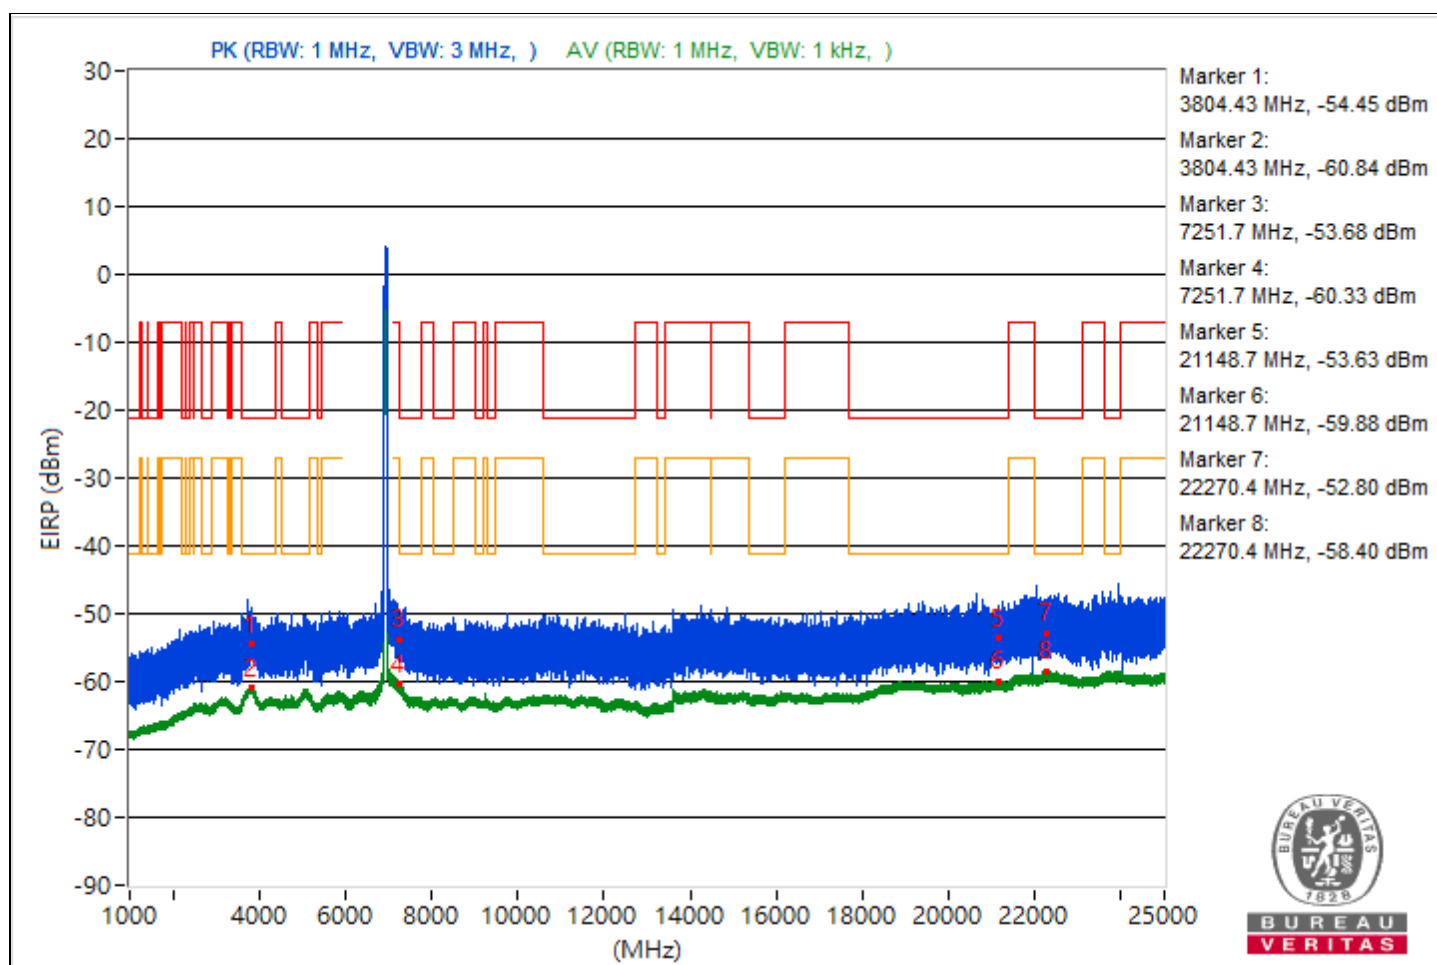


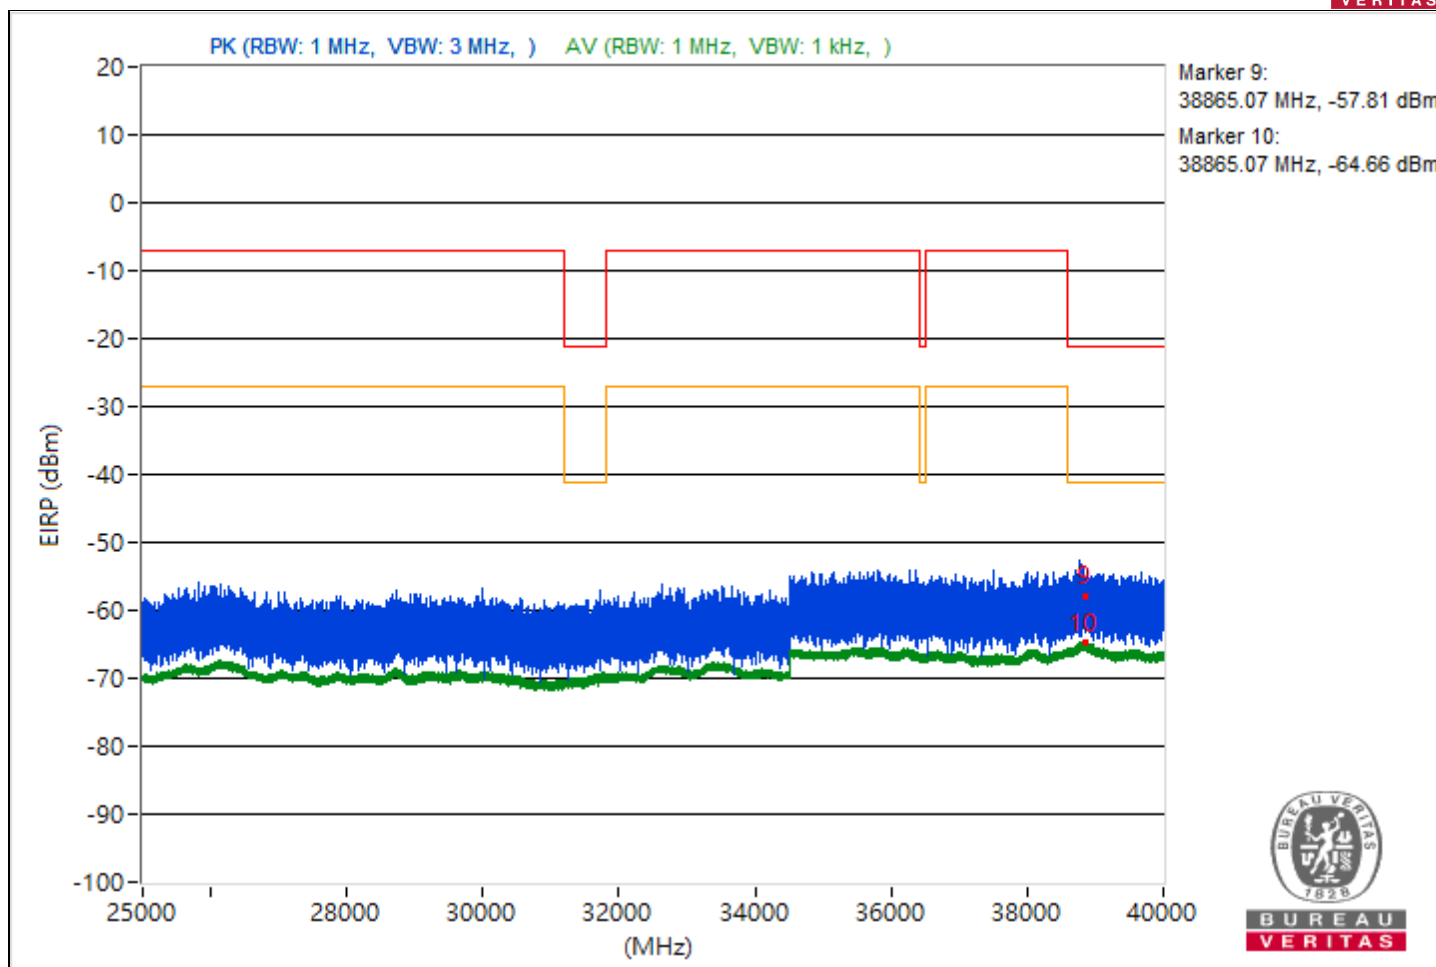


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.68	40.92 PK	74	-33.08	-59.26	4.92	-54.34
2	3805.68	34.45 AV	54	-19.55	-65.73	4.92	-60.81
3	7254.97	42.81 PK	74	-31.19	-57.37	4.92	-52.45
4	7254.97	35.19 AV	54	-18.81	-64.99	4.92	-60.07
5	21152.6	41.91 PK	74	-32.09	-58.27	4.92	-53.35
6	21152.6	35.58 AV	54	-18.42	-64.6	4.92	-59.68
7	23640	44.34 PK	74	-29.66	-55.84	4.92	-50.92
8	23640	36.93 AV	54	-17.07	-63.25	4.92	-58.33
9	38777.96	37.48 PK	74	-36.52	-62.7	4.92	-57.78
10	38777.96	30.56 AV	54	-23.44	-69.62	4.92	-64.7

Note: Margin value = Emission Level - Limit value

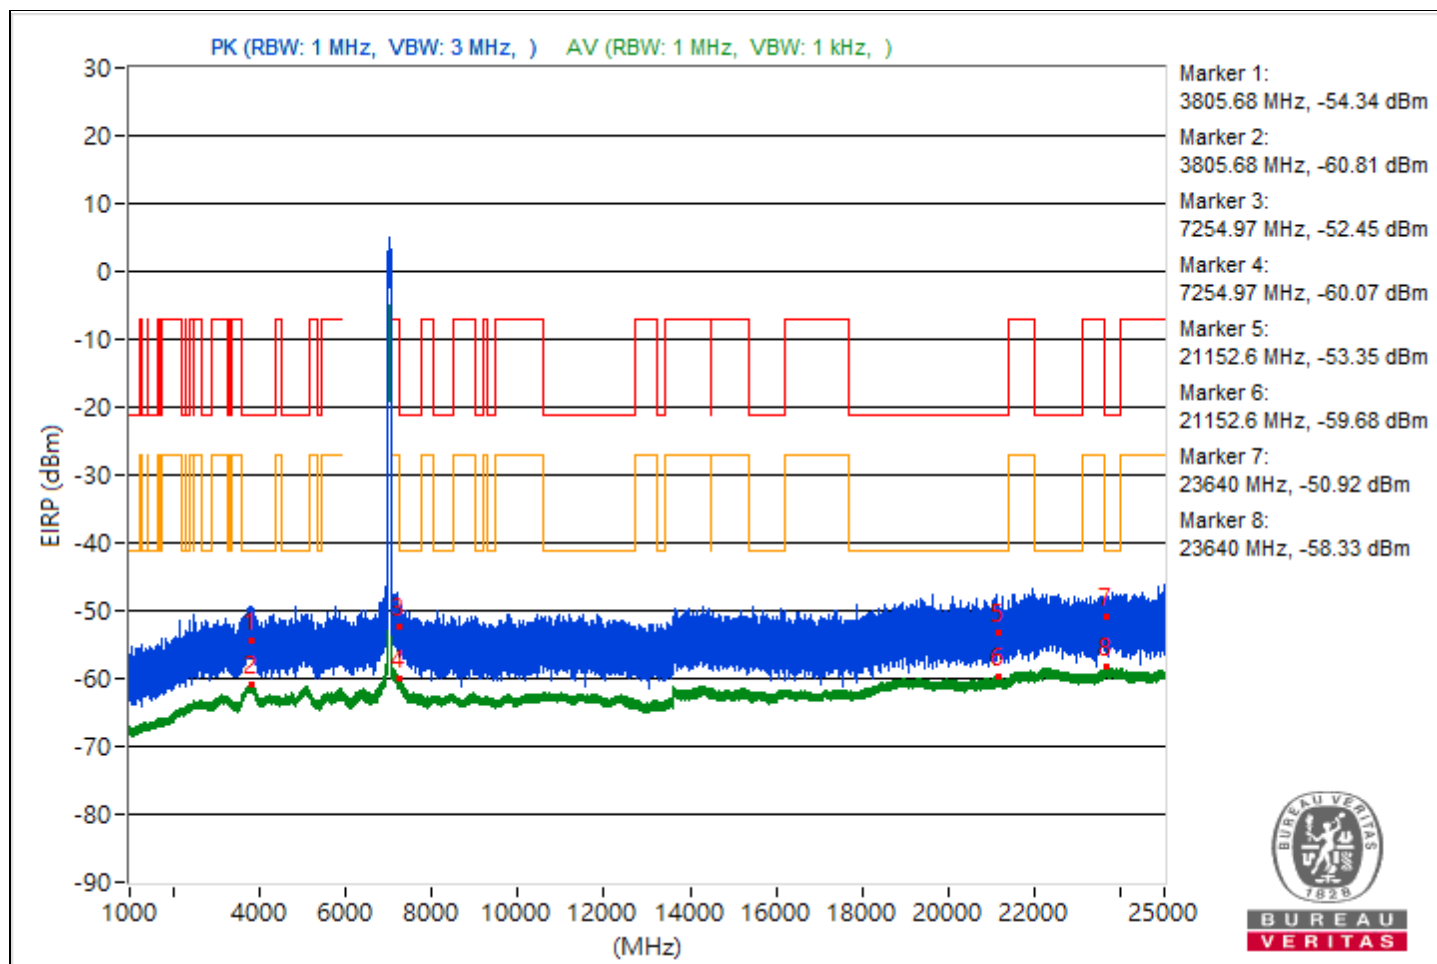


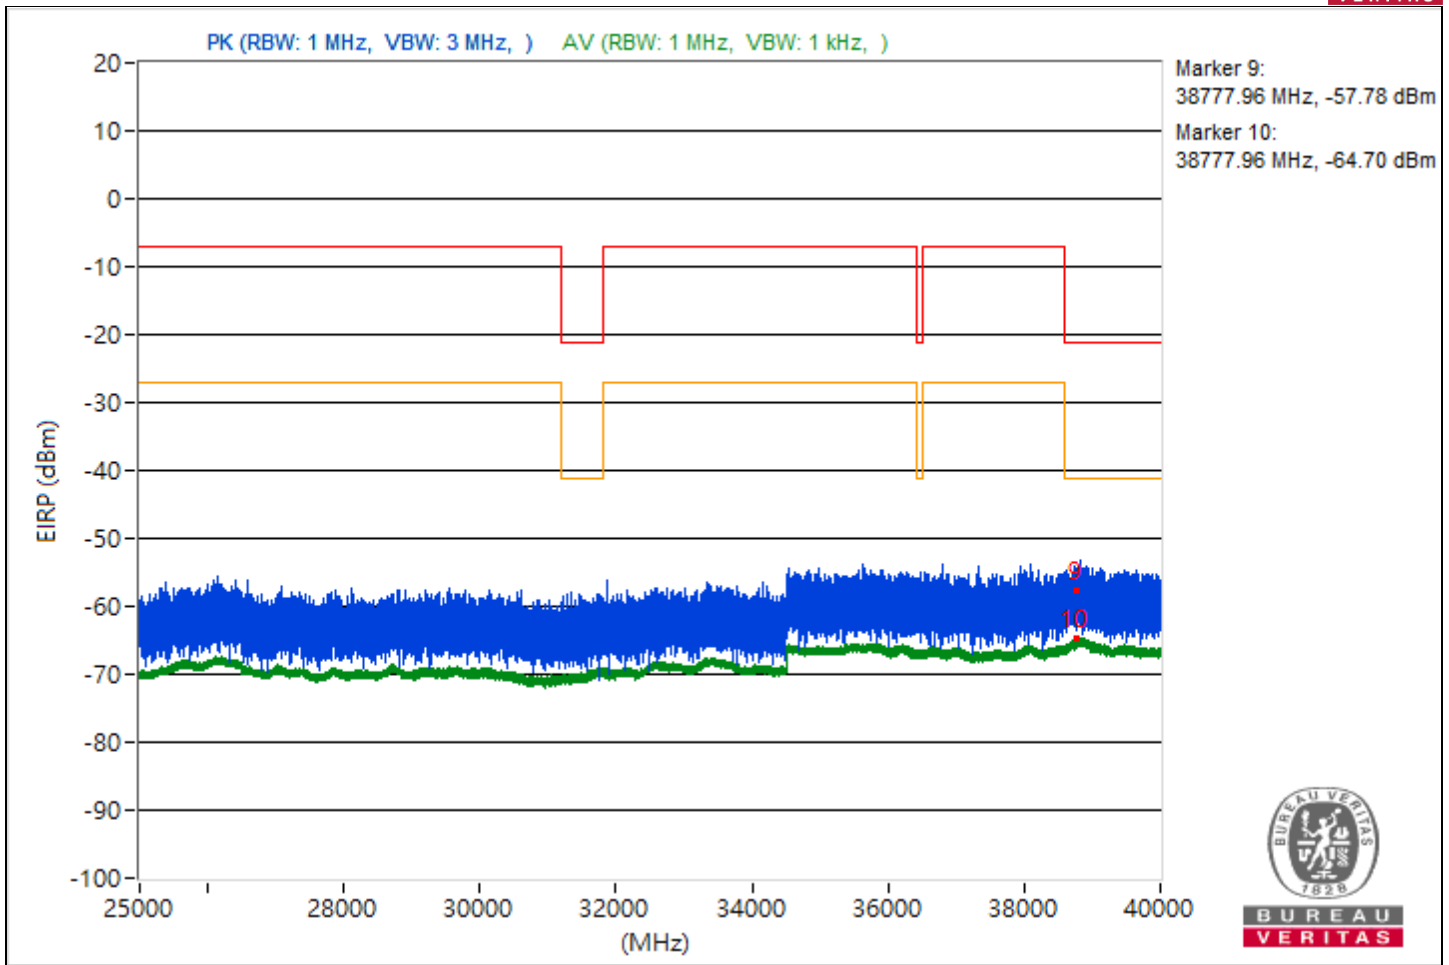


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.63	42.68 PK	74	-31.32	-57.5	4.92	-52.58
2	5446.63	36.84 AV	54	-17.16	-63.34	4.92	-58.42
3	8033.33	50.4 PK	74	-23.6	-49.78	4.92	-44.86
4	8033.33	49.01 AV	54	-4.99	-51.17	4.92	-46.25
5	21157.7	41.31 PK	74	-32.69	-58.87	4.92	-53.95
6	21157.7	35.48 AV	54	-18.52	-64.7	4.92	-59.78
7	23733.1	45.29 PK	74	-28.71	-54.89	4.92	-49.97
8	23733.1	36.76 AV	54	-17.24	-63.42	4.92	-58.5
9	38872.44	35.82 PK	74	-38.18	-64.36	4.92	-59.44
10	38872.44	30.75 AV	54	-23.25	-69.43	4.92	-64.51

Note: Margin value = Emission Level - Limit value

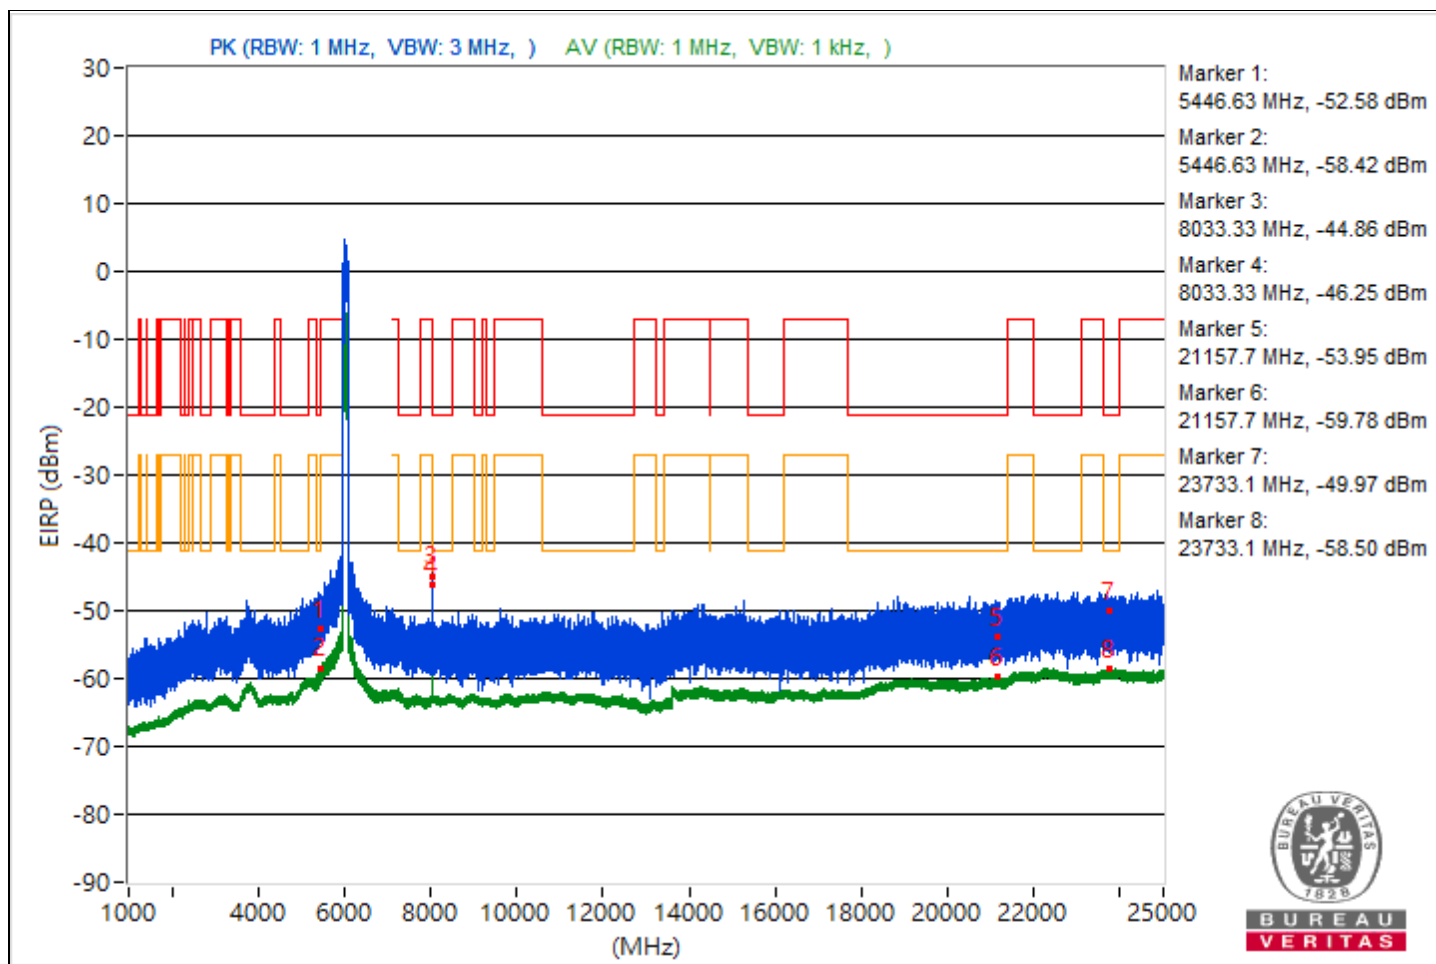


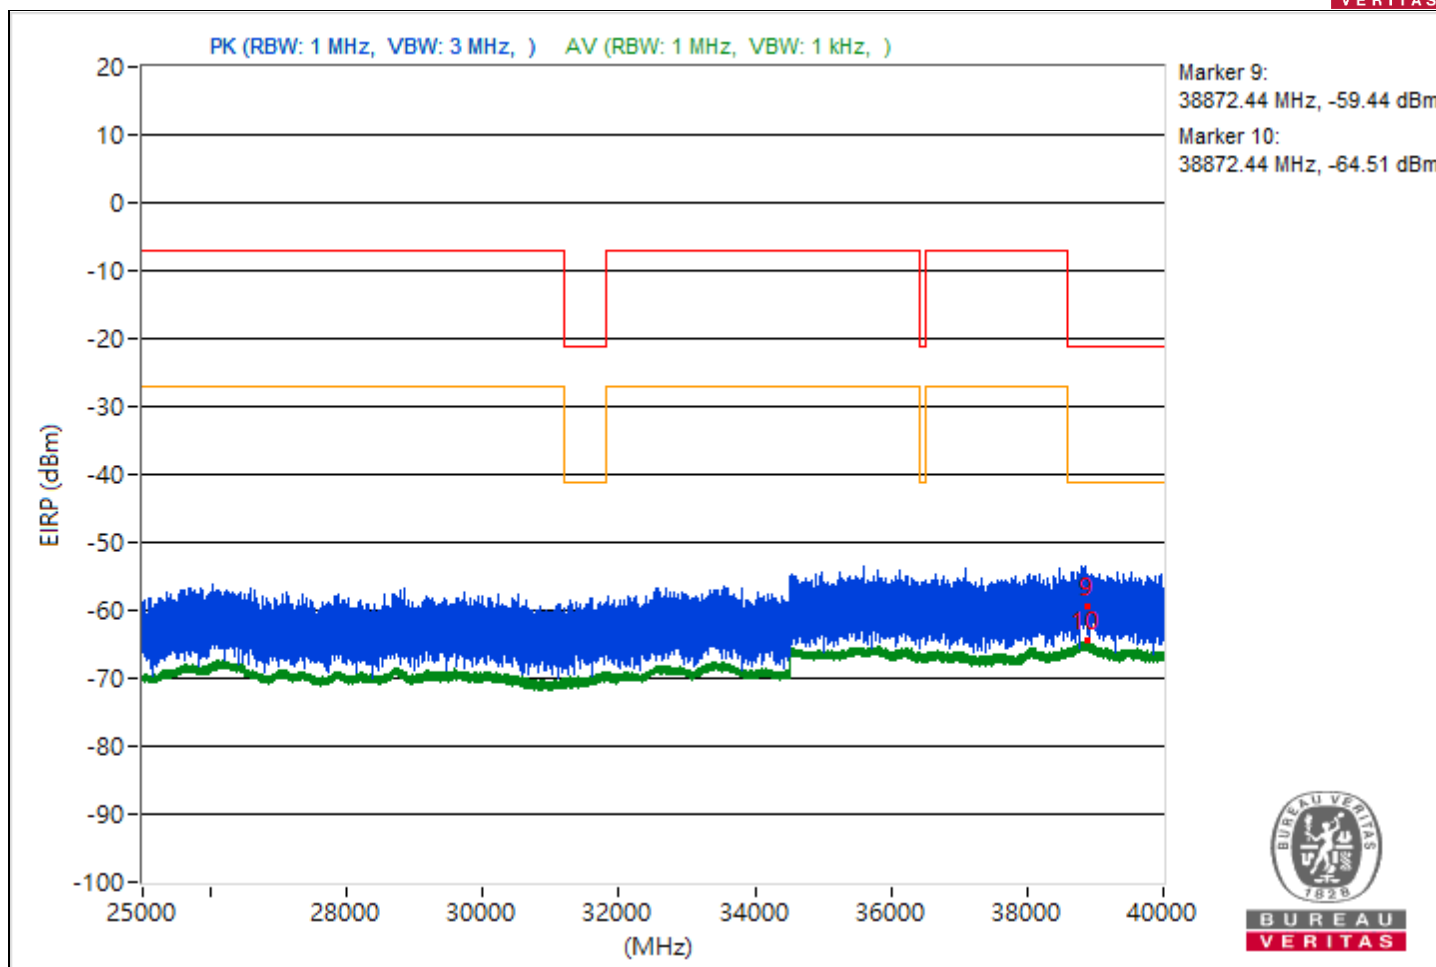


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.34	43.56 PK	74	-30.44	-56.62	4.92	-51.7
2	5455.34	35.99 AV	54	-18.01	-64.19	4.92	-59.27
3	8246.67	50.17 PK	74	-23.83	-50.01	4.92	-45.09
4	8246.67	47.55 AV	54	-6.45	-52.63	4.92	-47.71
5	21387.7	42 PK	74	-32	-58.18	4.92	-53.26
6	21387.7	35.55 AV	54	-18.45	-64.63	4.92	-59.71
7	23733.1	41.94 PK	74	-32.06	-58.24	4.92	-53.32
8	23733.1	36.83 AV	54	-17.17	-63.35	4.92	-58.43
9	38828.44	35.7 PK	74	-38.3	-64.48	4.92	-59.56
10	38828.44	30.59 AV	54	-23.41	-69.59	4.92	-64.67

Note: Margin value = Emission Level - Limit value

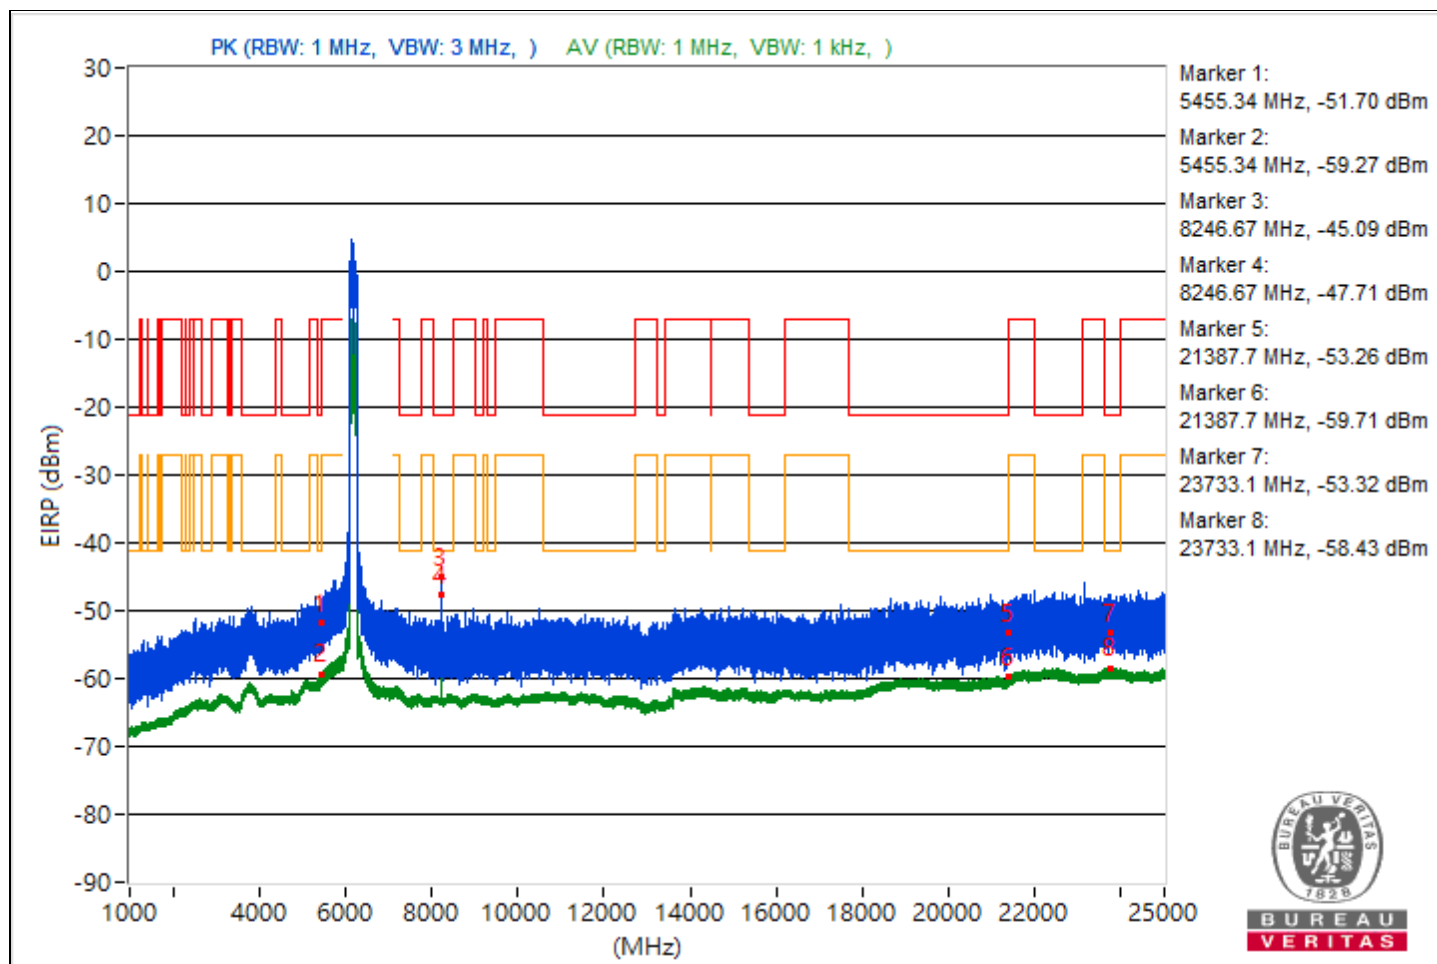


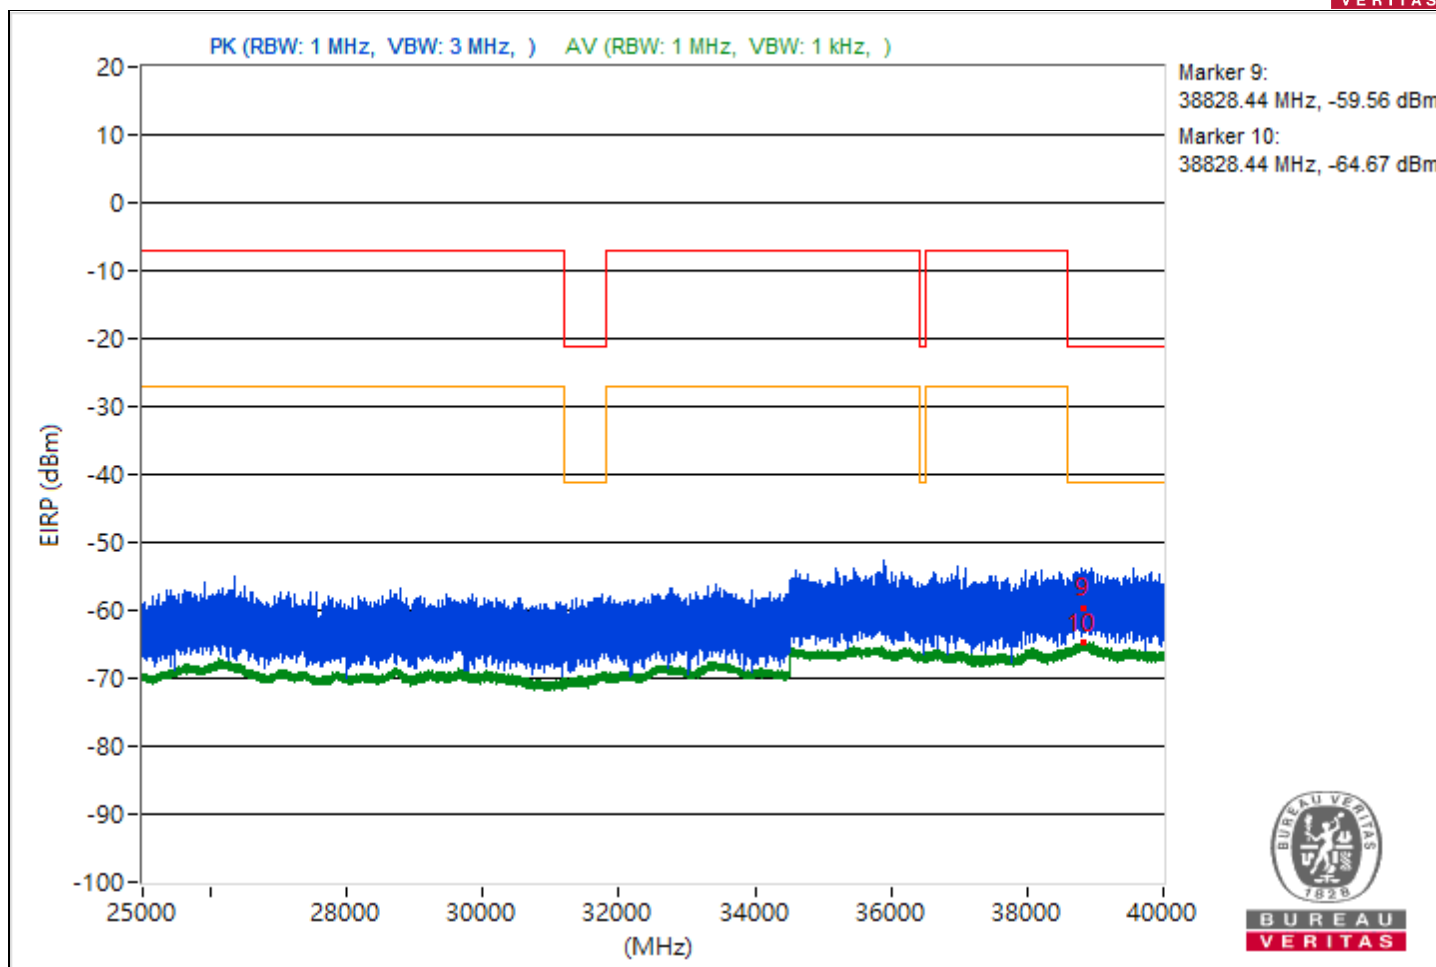


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.36	40.55 PK	74	-33.45	-59.63	4.92	-54.71
2	5456.36	35.03 AV	54	-18.97	-65.15	4.92	-60.23
3	8460	47.98 PK	74	-26.02	-52.2	4.92	-47.28
4	8460	44.82 AV	54	-9.18	-55.36	4.92	-50.44
5	21124.1	41.55 PK	74	-32.45	-58.63	4.92	-53.71
6	21124.1	35.28 AV	54	-18.72	-64.9	4.92	-59.98
7	22288.4	42.94 PK	74	-31.06	-57.24	4.92	-52.32
8	22288.4	36.76 AV	54	-17.24	-63.42	4.92	-58.5
9	38814.58	37.58 PK	74	-36.42	-62.6	4.92	-57.68
10	38814.58	30.56 AV	54	-23.44	-69.62	4.92	-64.7

Note: Margin value = Emission Level - Limit value

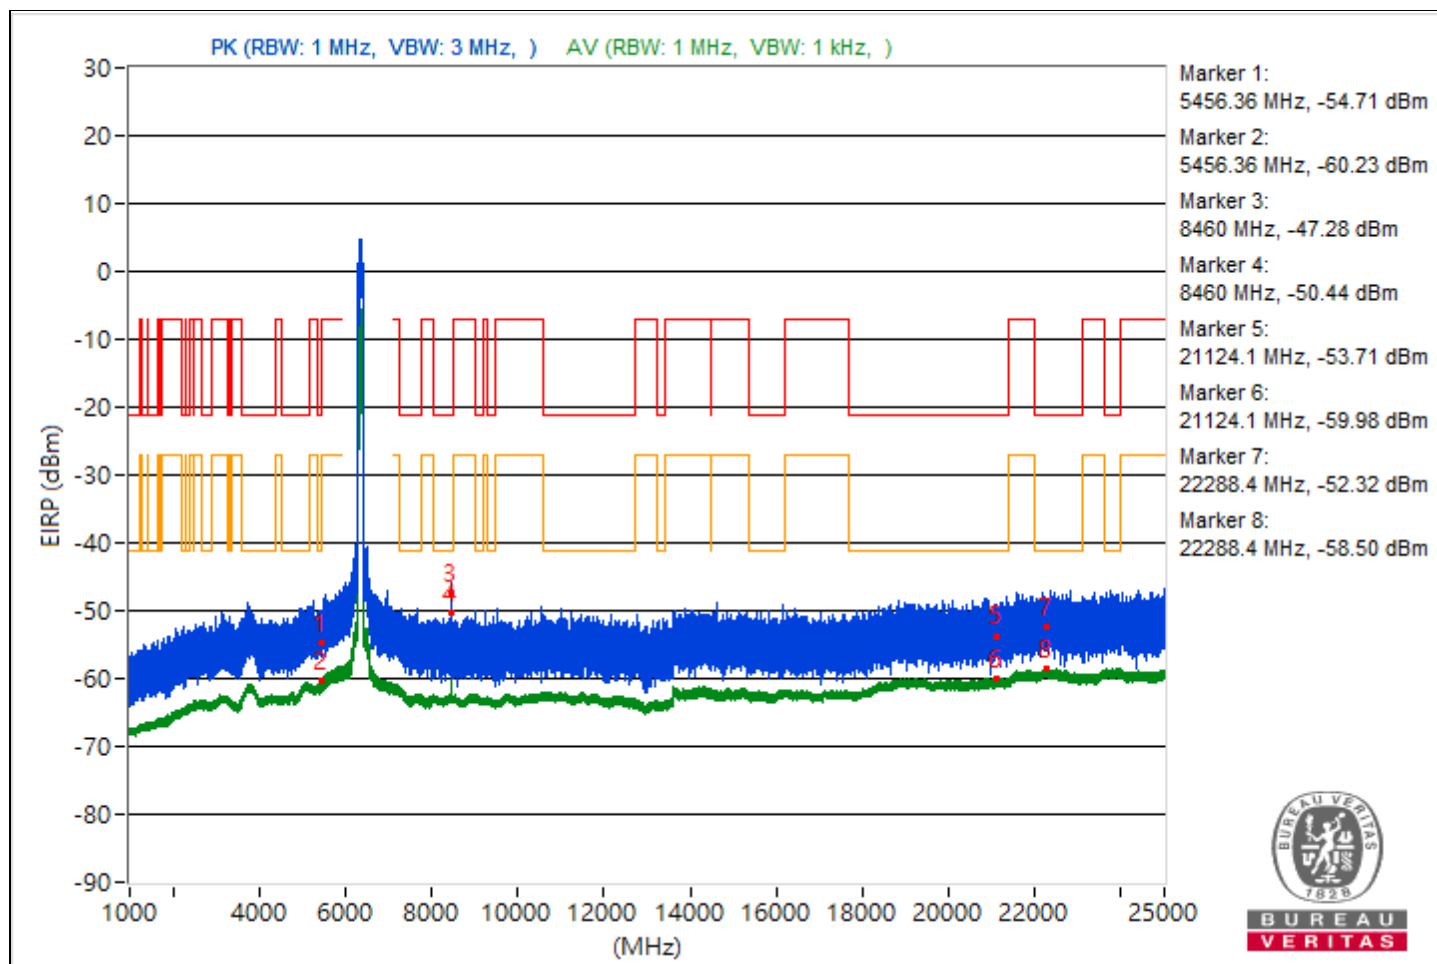


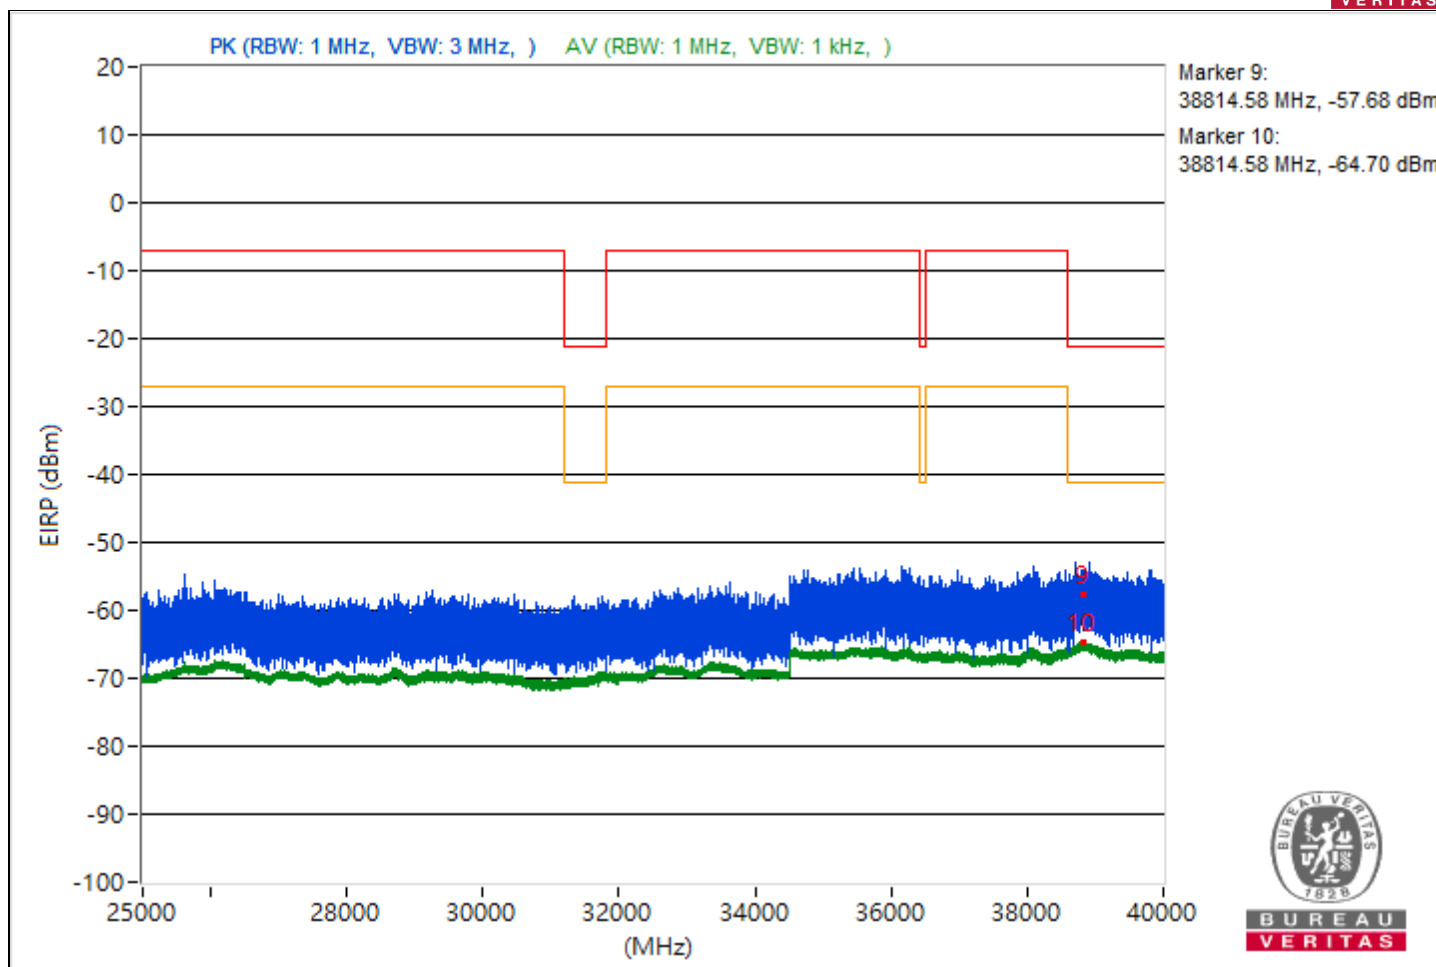


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.94	41.78 PK	74	-32.22	-58.4	4.92	-53.48
2	5453.94	34.73 AV	54	-19.27	-65.45	4.92	-60.53
3	7282.19	42.13 PK	74	-31.87	-58.05	4.92	-53.13
4	7282.19	34.32 AV	54	-19.68	-65.86	4.92	-60.94
5	21145.1	39.96 PK	74	-34.04	-60.22	4.92	-55.3
6	21145.1	35.42 AV	54	-18.58	-64.76	4.92	-59.84
7	23796.1	47.15 PK	74	-26.85	-53.03	4.92	-48.11
8	23796.1	36.81 AV	54	-17.19	-63.37	4.92	-58.45
9	38821.87	37.09 PK	74	-36.91	-63.09	4.92	-58.17
10	38821.87	30.6 AV	54	-23.4	-69.58	4.92	-64.66

Note: Margin value = Emission Level - Limit value

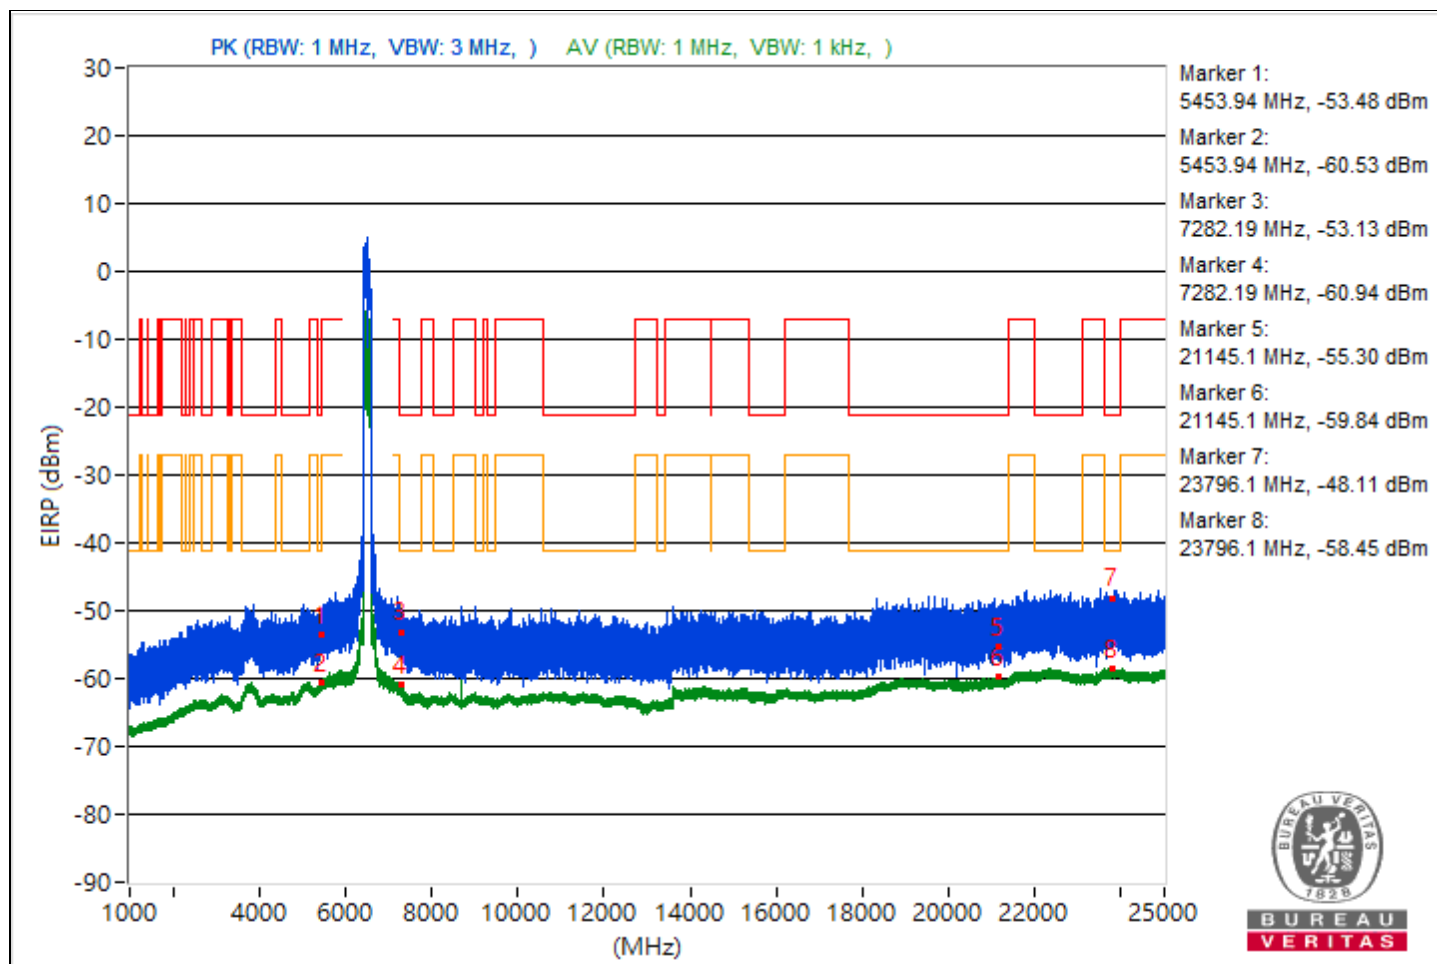


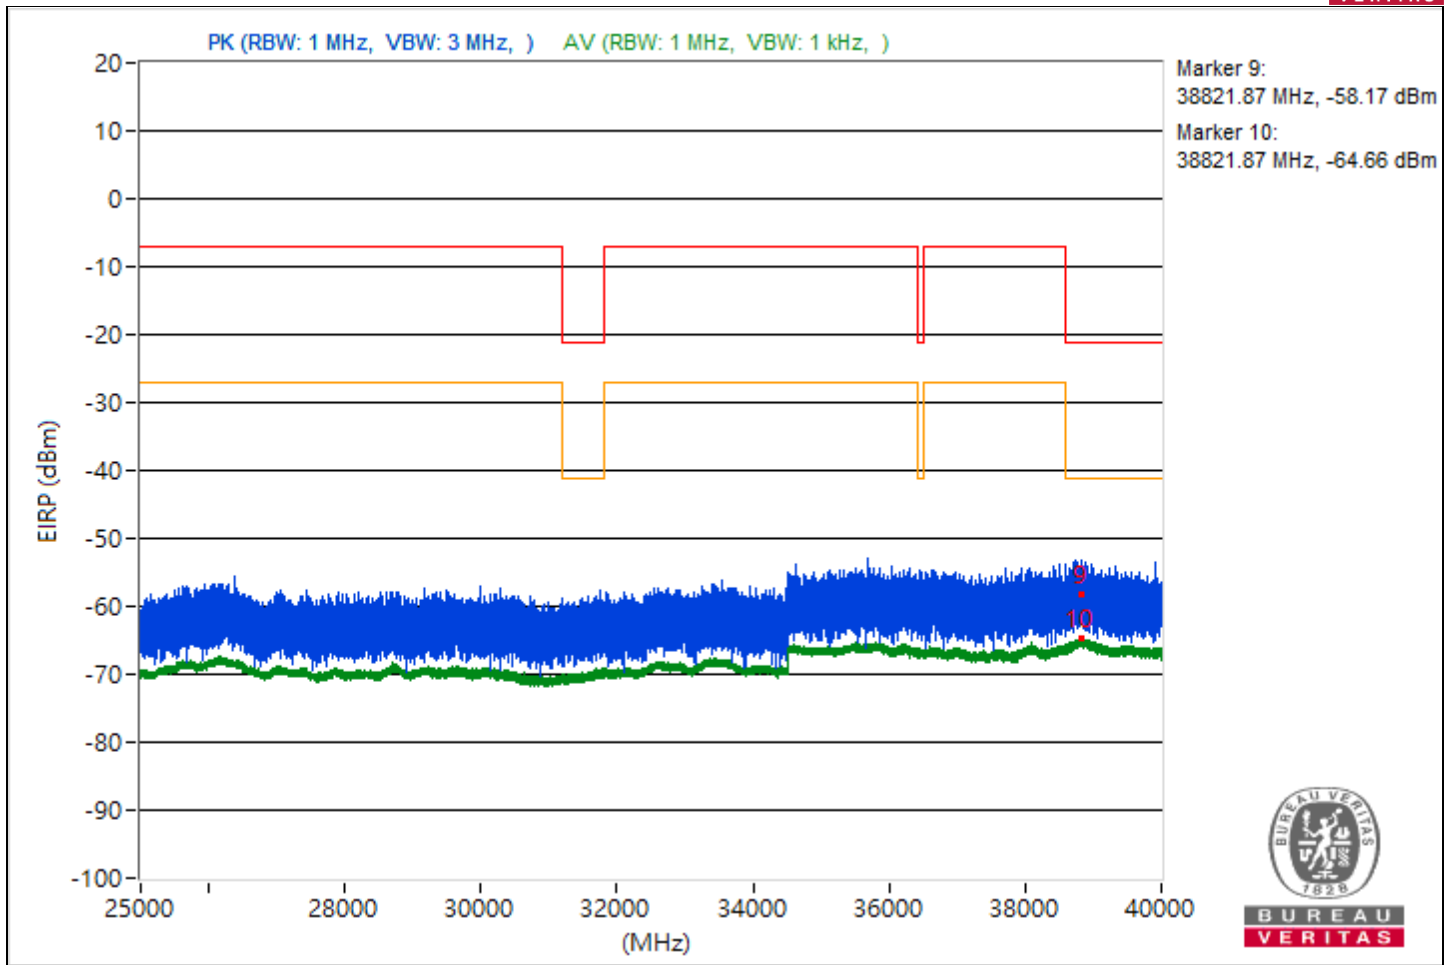


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3794.71	39.49 PK	74	-34.51	-60.69	4.92	-55.77
2	3794.71	34.72 AV	54	-19.28	-65.46	4.92	-60.54
3	7251.23	42.37 PK	74	-31.63	-57.81	4.92	-52.89
4	7251.23	34.51 AV	54	-19.49	-65.67	4.92	-60.75
5	21180.4	40.41 PK	74	-33.59	-59.77	4.92	-54.85
6	21180.4	35.53 AV	54	-18.47	-64.65	4.92	-59.73
7	22241.7	41.9 PK	74	-32.1	-58.28	4.92	-53.36
8	22241.7	36.7 AV	54	-17.3	-63.48	4.92	-58.56
9	38810.93	33.61 PK	74	-40.39	-66.57	4.92	-61.65
10	38810.93	30.6 AV	54	-23.4	-69.58	4.92	-64.66

Note: Margin value = Emission Level - Limit value

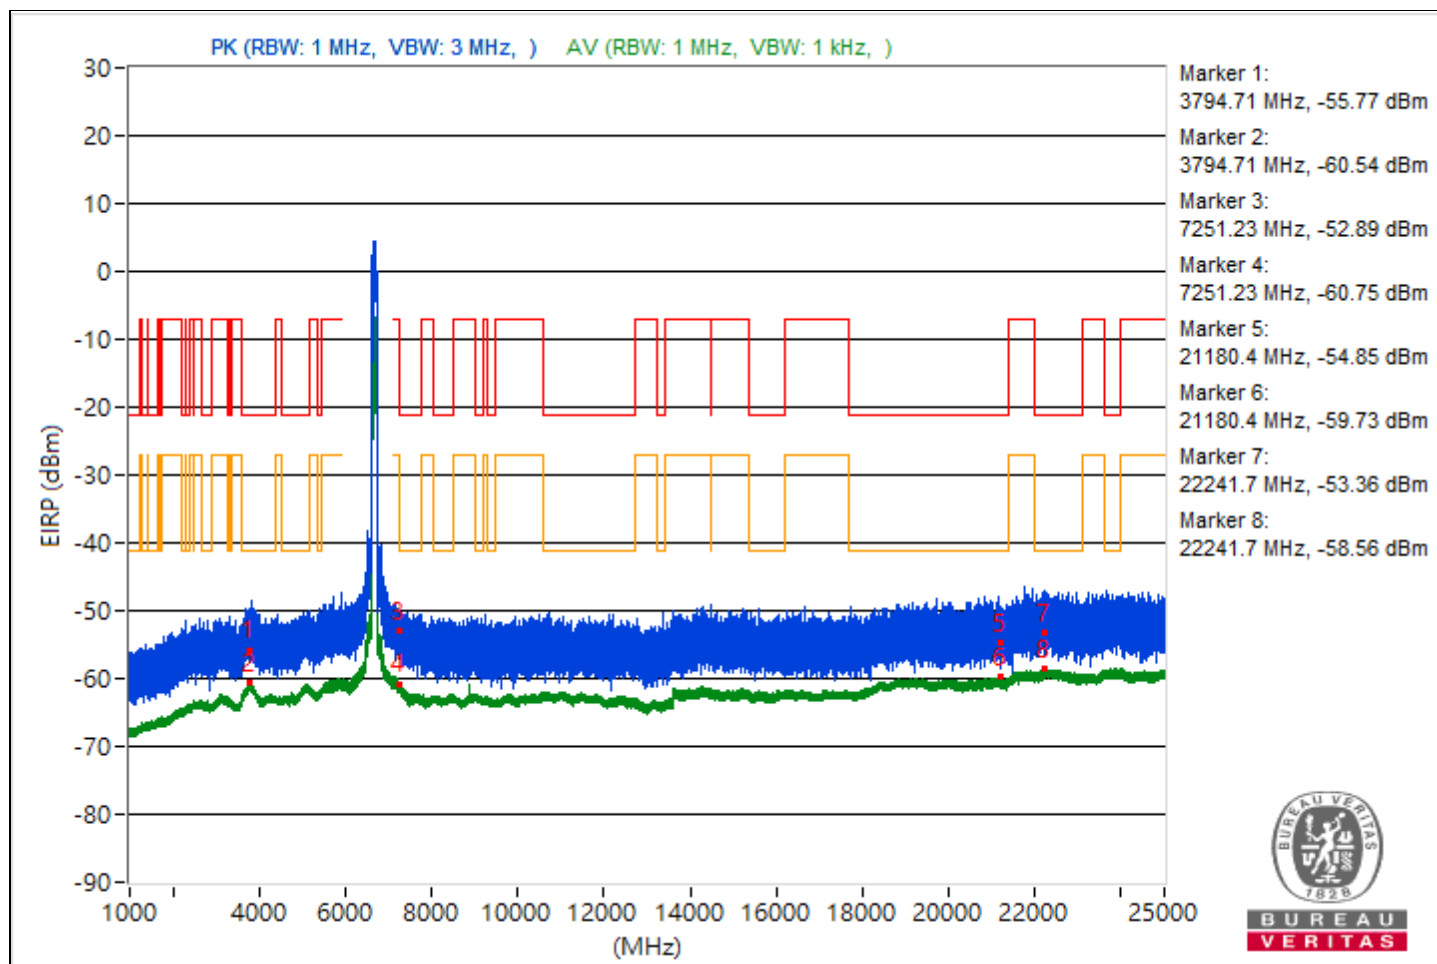


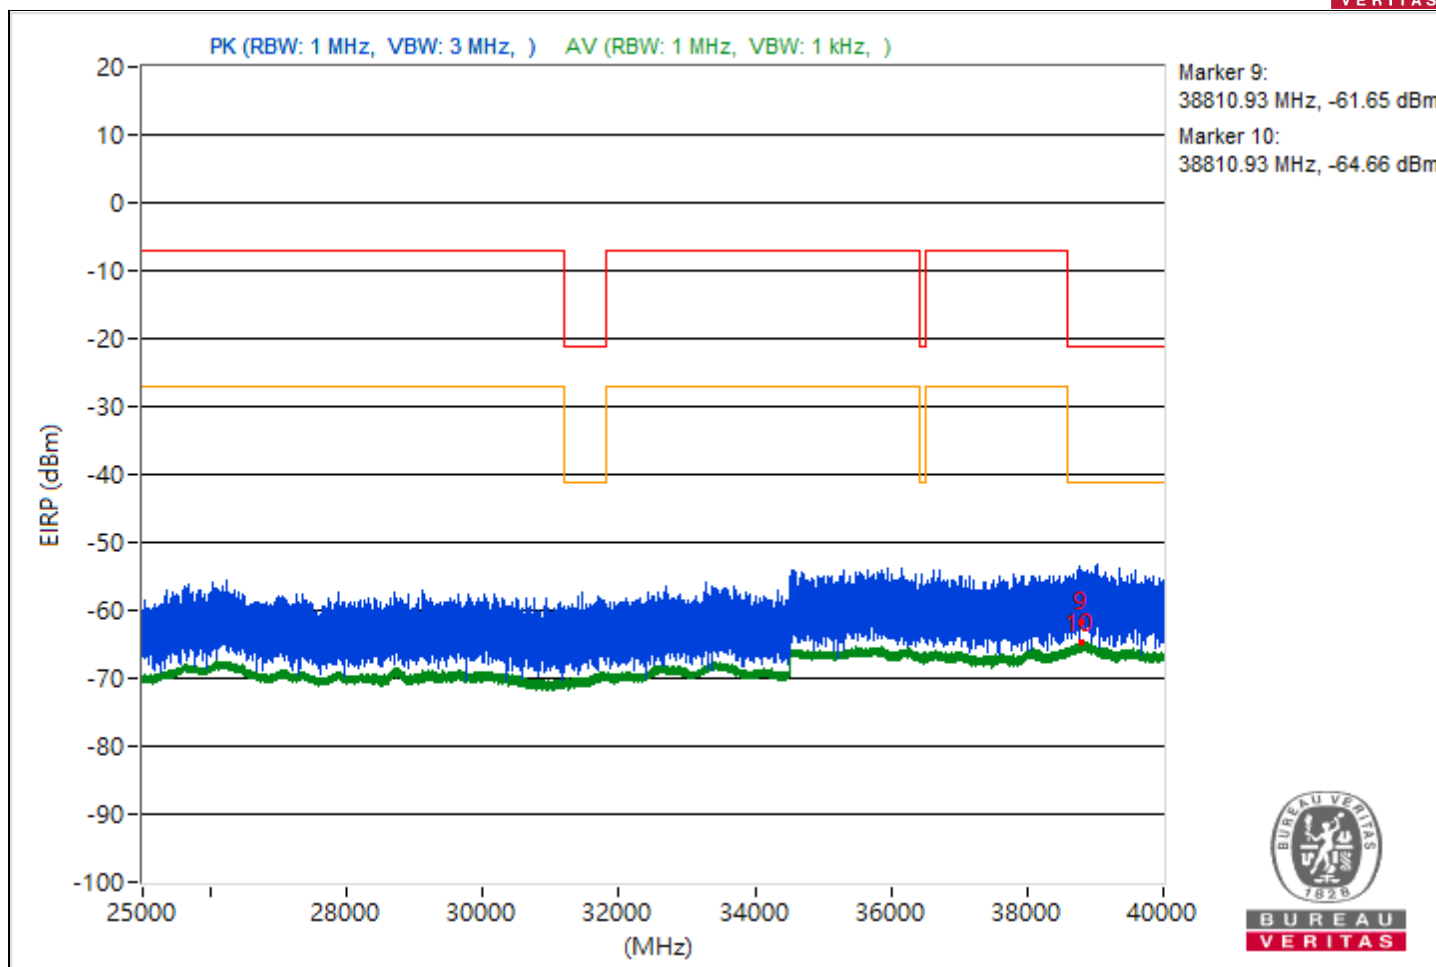


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.18	41.78 PK	74	-32.22	-58.4	4.92	-53.48
2	3809.18	34.67 AV	54	-19.33	-65.51	4.92	-60.59
3	7269.04	39.93 PK	74	-34.07	-60.25	4.92	-55.33
4	7269.04	35.53 AV	54	-18.47	-64.65	4.92	-59.73
5	21063.5	40.85 PK	74	-33.15	-59.33	4.92	-54.41
6	21063.5	35.44 AV	54	-18.56	-64.74	4.92	-59.82
7	22300.3	45.02 PK	74	-28.98	-55.16	4.92	-50.24
8	22300.3	36.7 AV	54	-17.3	-63.48	4.92	-58.56
9	38877.69	37.63 PK	74	-36.37	-62.55	4.92	-57.63
10	38877.69	30.53 AV	54	-23.47	-69.65	4.92	-64.73

Note: Margin value = Emission Level - Limit value

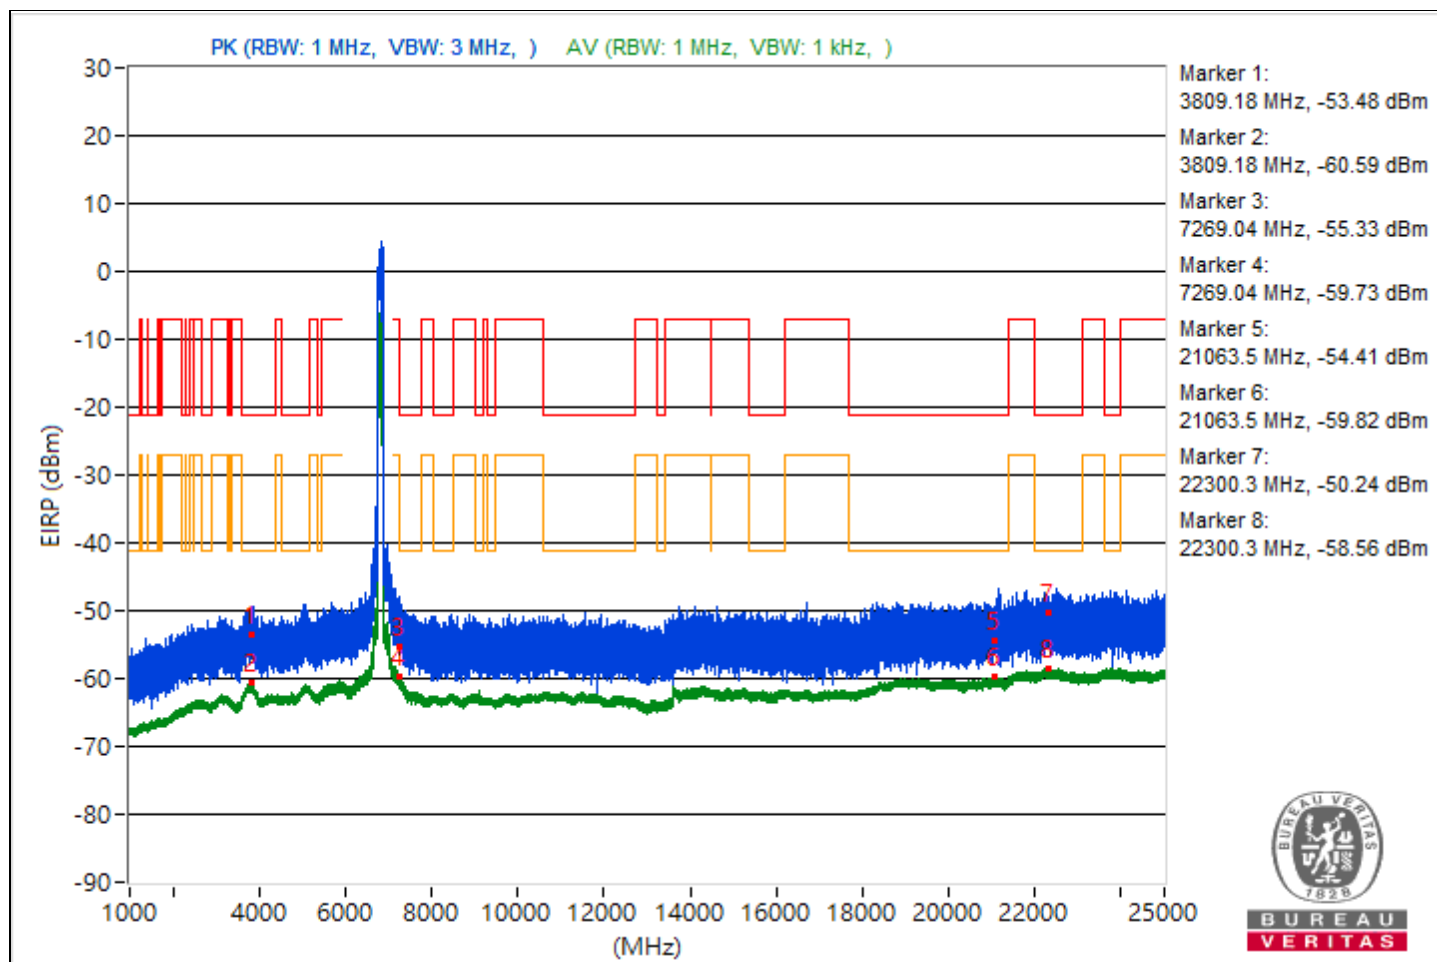


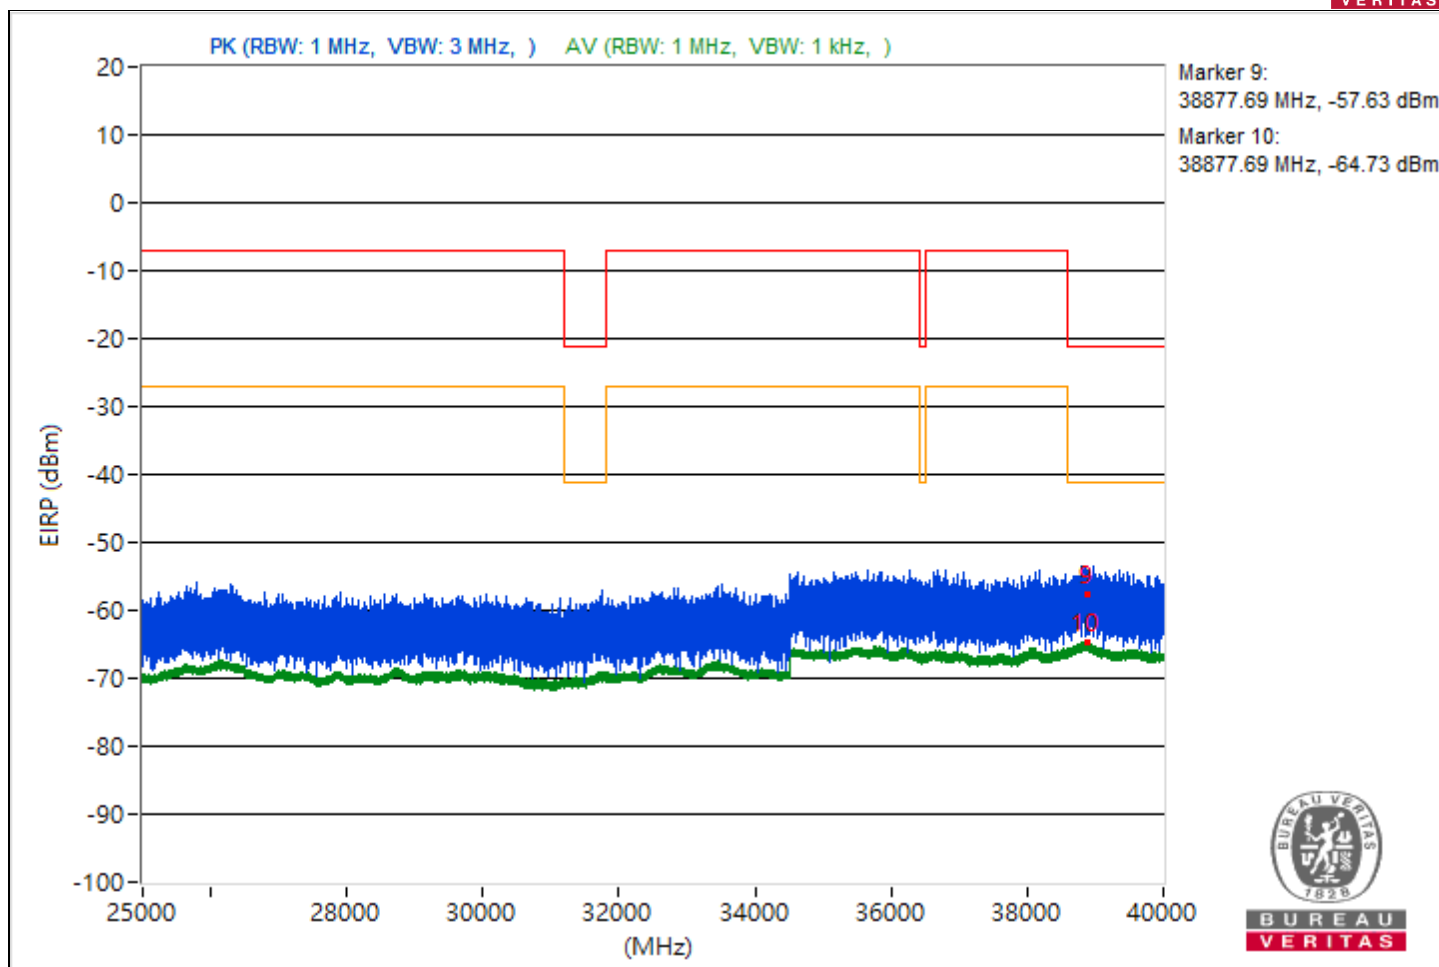


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.92	42.41 PK	74	-31.59	-57.77	4.92	-52.85
2	3806.92	34.57 AV	54	-19.43	-65.61	4.92	-60.69
3	7263.68	42.23 PK	74	-31.77	-57.95	4.92	-53.03
4	7263.68	35.74 AV	54	-18.26	-64.44	4.92	-59.52
5	21128.7	42.4 PK	74	-31.6	-57.78	4.92	-52.86
6	21128.7	35.47 AV	54	-18.53	-64.71	4.92	-59.79
7	23893.7	44.22 PK	74	-29.78	-55.96	4.92	-51.04
8	23893.7	36.73 AV	54	-17.27	-63.45	4.92	-58.53
9	38785.42	38.26 PK	74	-35.74	-61.92	4.92	-57
10	38785.42	30.58 AV	54	-23.42	-69.6	4.92	-64.68

Note: Margin value = Emission Level - Limit value

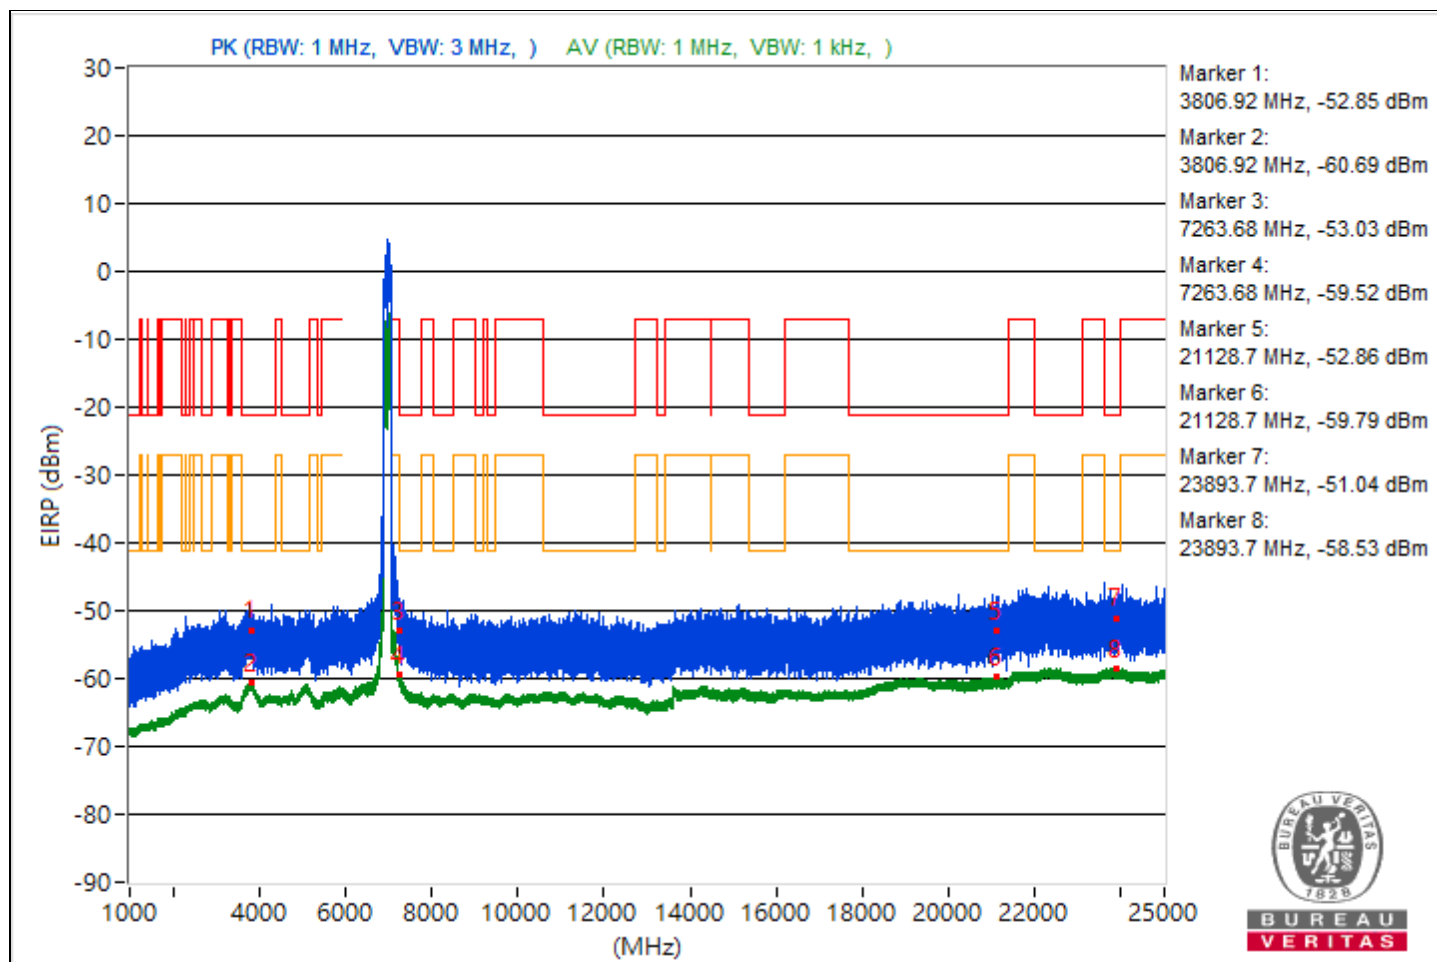


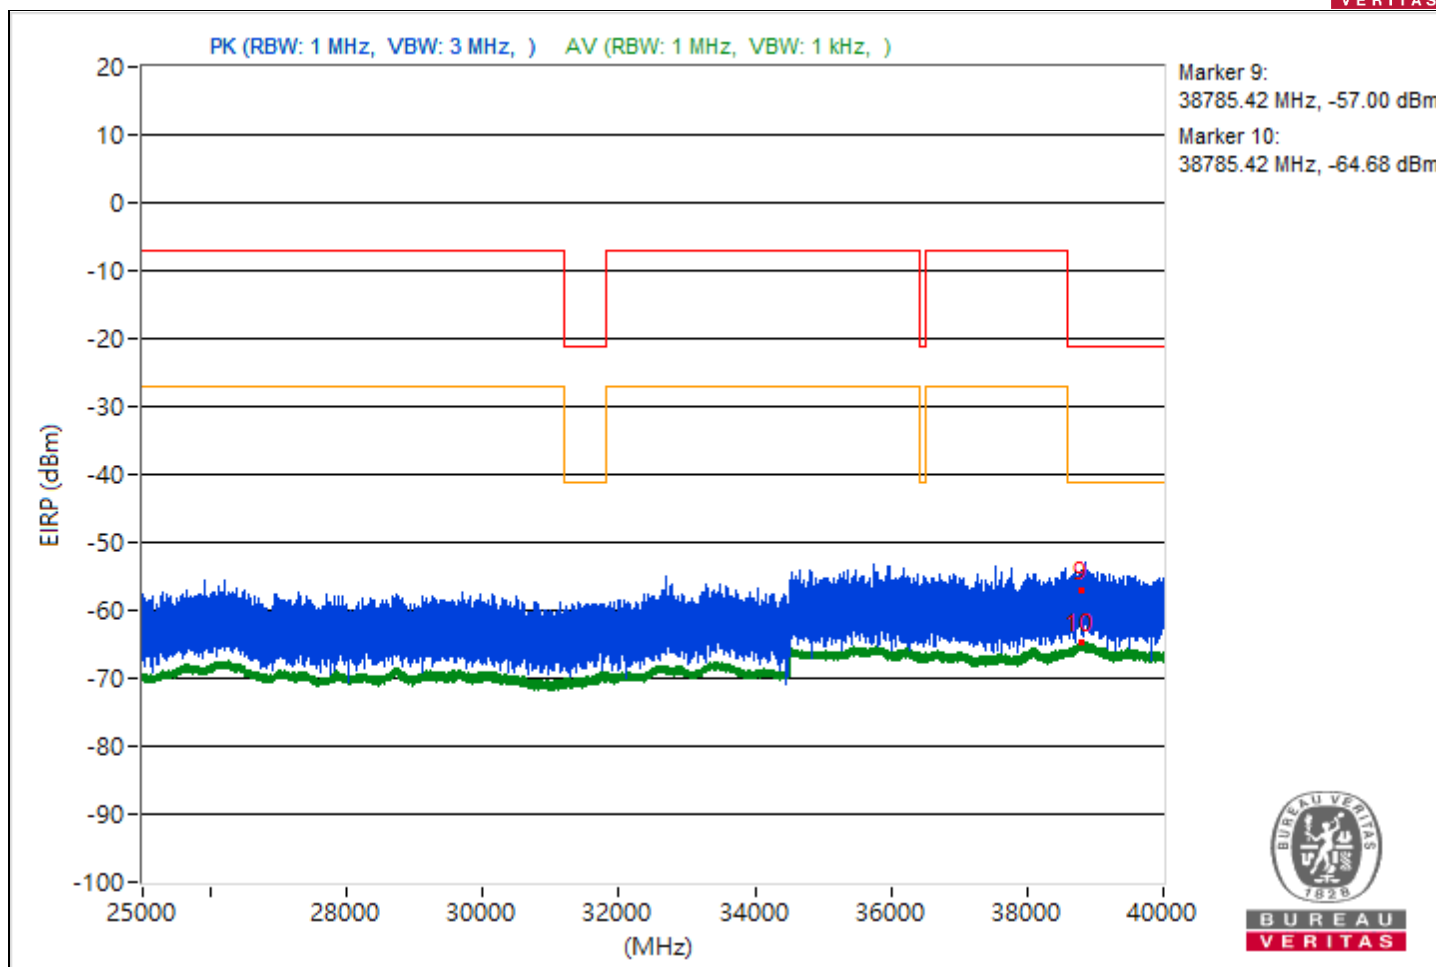


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.66	43.53 PK	74	-30.47	-56.65	4.92	-51.73
2	3796.66	34.49 AV	54	-19.51	-65.69	4.92	-60.77
3	14475.47	41.53 PK	74	-32.47	-58.65	4.92	-53.73
4	14475.47	33.89 AV	54	-20.11	-66.29	4.92	-61.37
5	21077	42.43 PK	74	-31.57	-57.75	4.92	-52.83
6	21077	35.38 AV	54	-18.62	-64.8	4.92	-59.88
7	22223.8	43.37 PK	74	-30.63	-56.81	4.92	-51.89
8	22223.8	36.72 AV	54	-17.28	-63.46	4.92	-58.54
9	38827.73	33.18 PK	74	-40.82	-67	4.92	-62.08
10	38827.73	30.47 AV	54	-23.53	-69.71	4.92	-64.79

Note: Margin value = Emission Level - Limit value

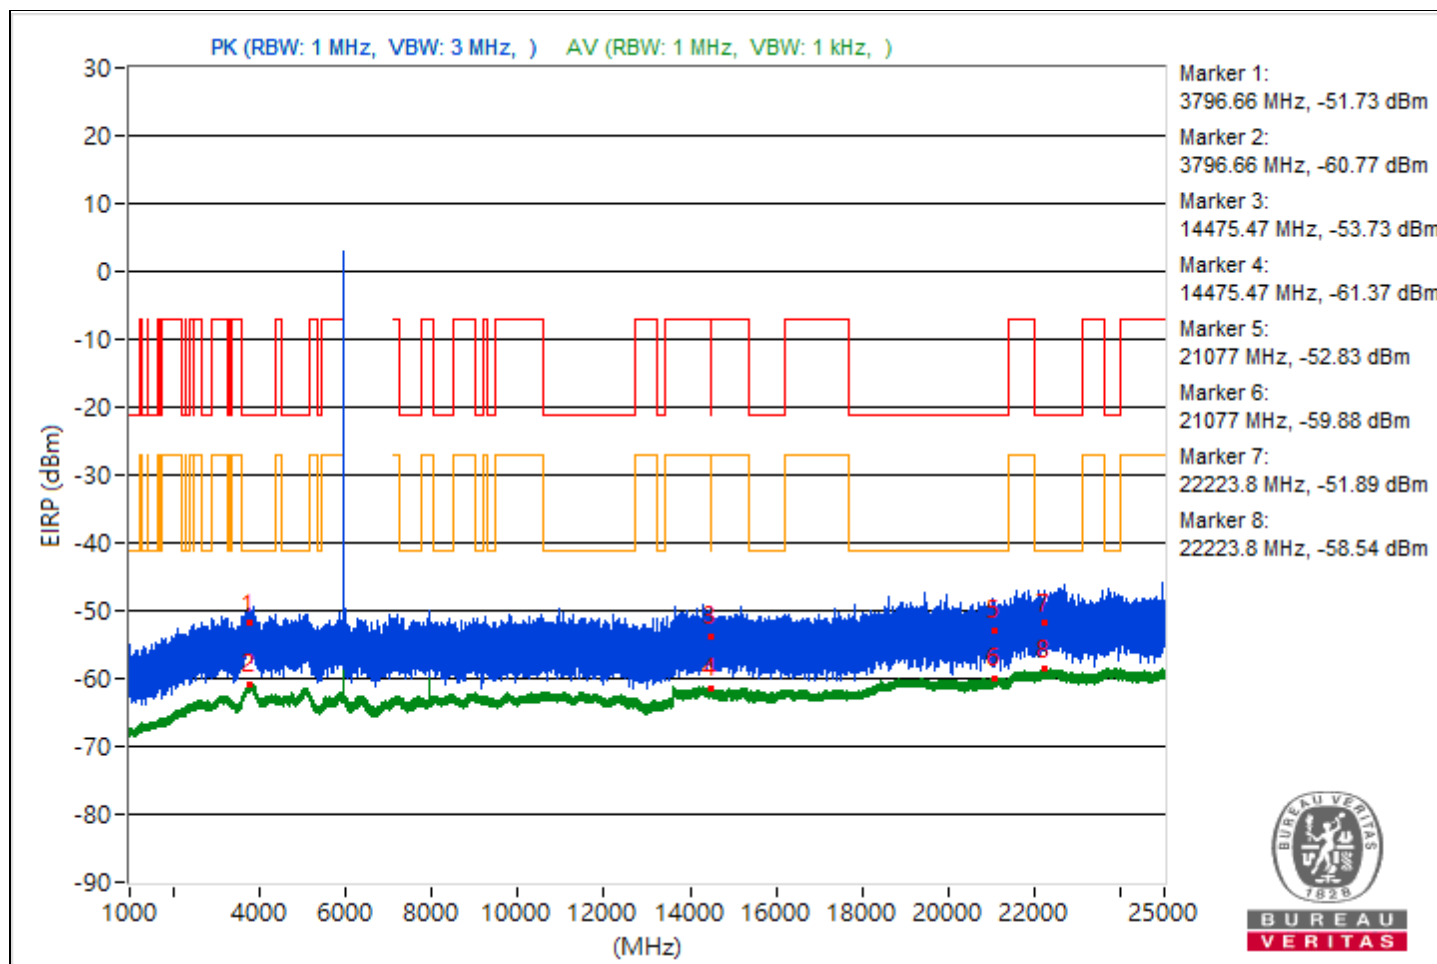

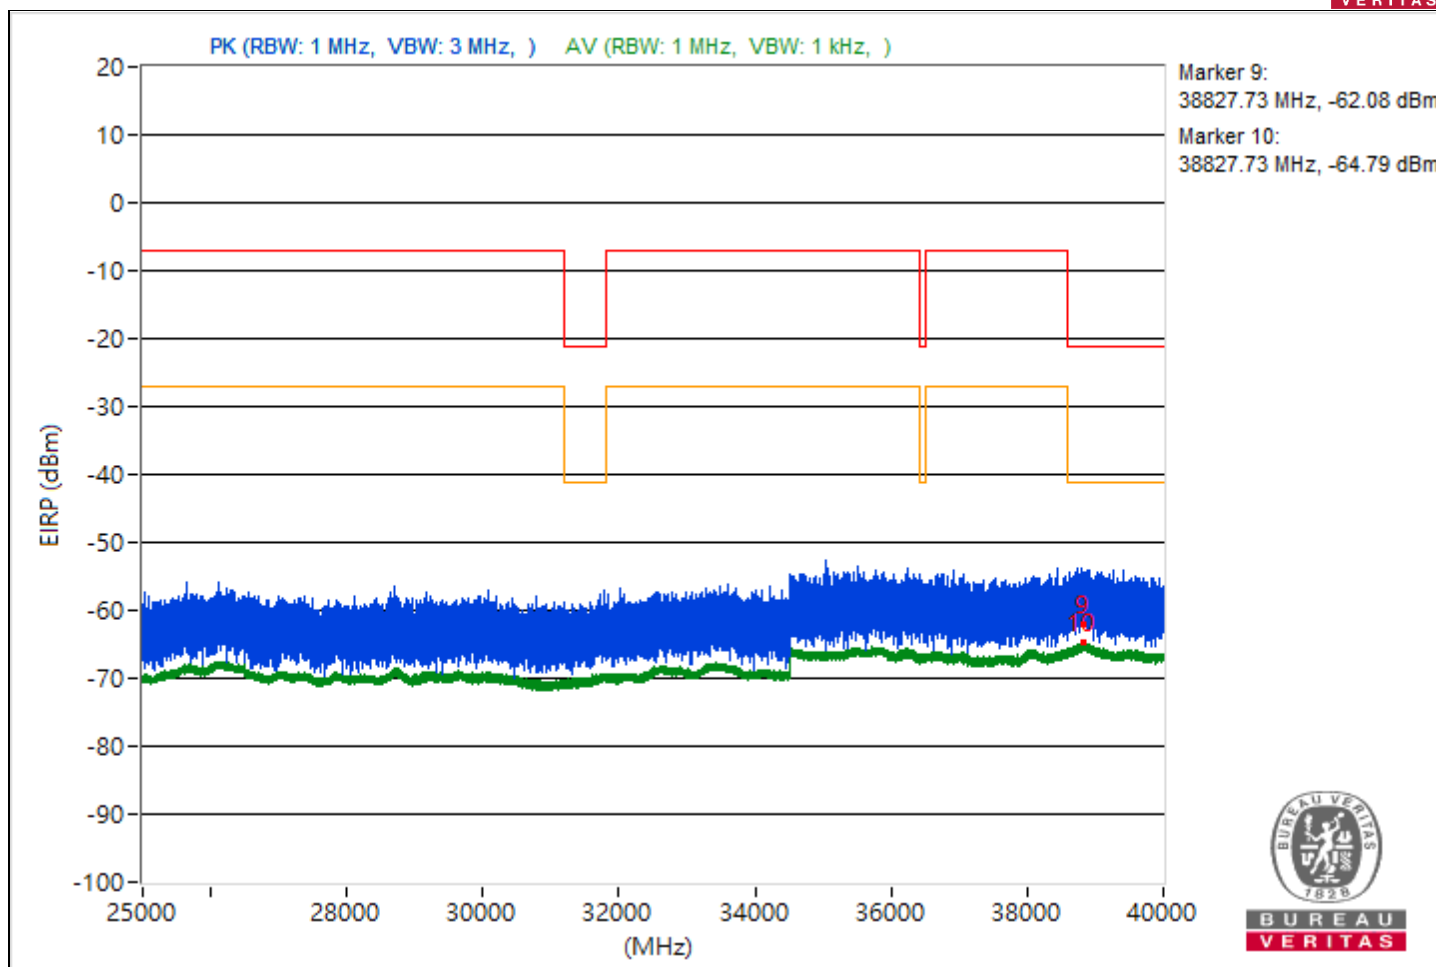

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3816.88	42.24 PK	74	-31.76	-57.94	4.92	-53.02
2	3816.88	34.56 AV	54	-19.44	-65.62	4.92	-60.7
3	14482.31	40.16 PK	74	-33.84	-60.02	4.92	-55.1
4	14482.31	33.63 AV	54	-20.37	-66.55	4.92	-61.63
5	21130.8	41.68 PK	74	-32.32	-58.5	4.92	-53.58
6	21130.8	35.37 AV	54	-18.63	-64.81	4.92	-59.89
7	23953.8	42.23 PK	74	-31.77	-57.95	4.92	-53.03
8	23953.8	36.67 AV	54	-17.33	-63.51	4.92	-58.59
9	38856.36	36.82 PK	74	-37.18	-63.36	4.92	-58.44
10	38856.36	30.62 AV	54	-23.38	-69.56	4.92	-64.64

Note: Margin value = Emission Level - Limit value

