



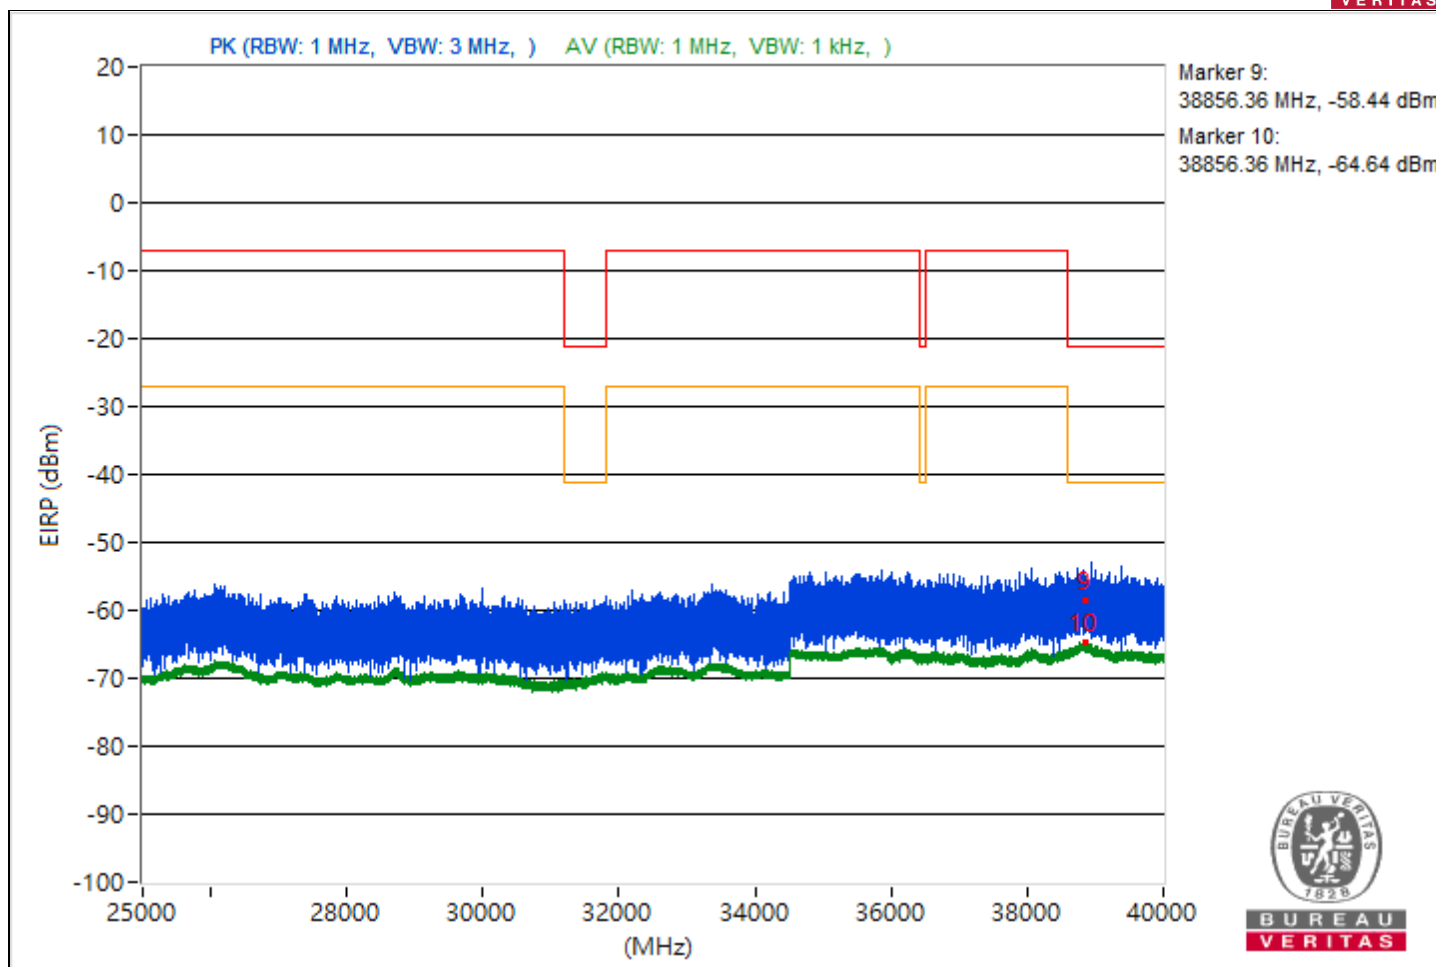


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.21	41.98 PK	74	-32.02	-58.2	4.92	-53.28
2	3798.21	34.64 AV	54	-19.36	-65.54	4.92	-60.62
3	14472.36	41.22 PK	74	-32.78	-58.96	4.92	-54.04
4	14472.36	33.81 AV	54	-20.19	-66.37	4.92	-61.45
5	21068.3	39.58 PK	74	-34.42	-60.6	4.92	-55.68
6	21068.3	35.53 AV	54	-18.47	-64.65	4.92	-59.73
7	23712.7	40.08 PK	74	-33.92	-60.1	4.92	-55.18
8	23712.7	36.74 AV	54	-17.26	-63.44	4.92	-58.52
9	38789.42	37 PK	74	-37	-63.18	4.92	-58.26
10	38789.42	30.47 AV	54	-23.53	-69.71	4.92	-64.79

Note: Margin value = Emission Level - Limit value

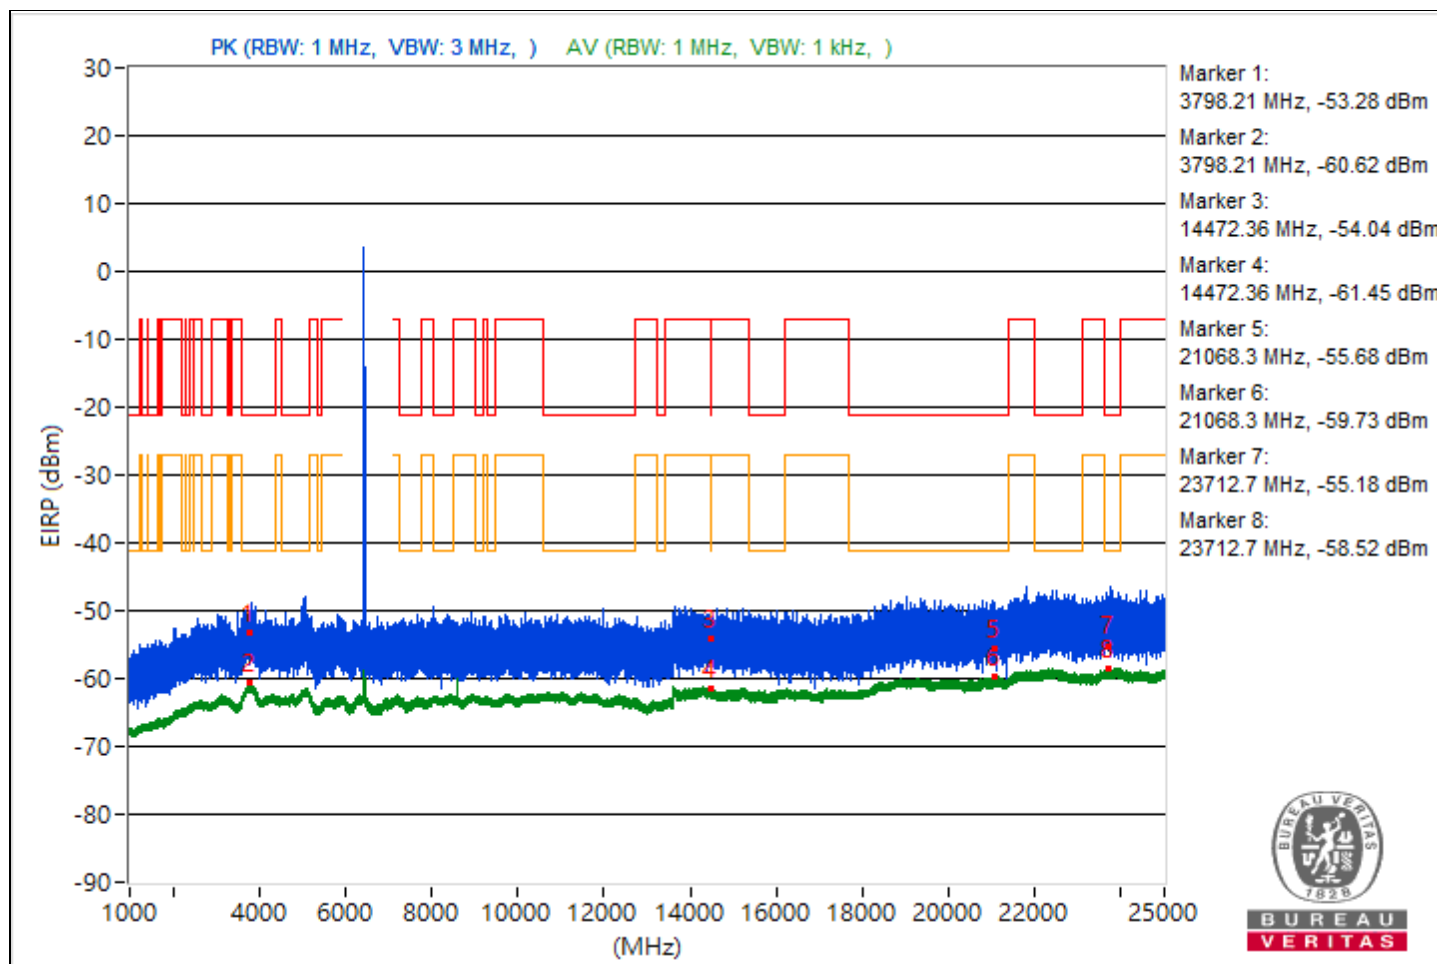


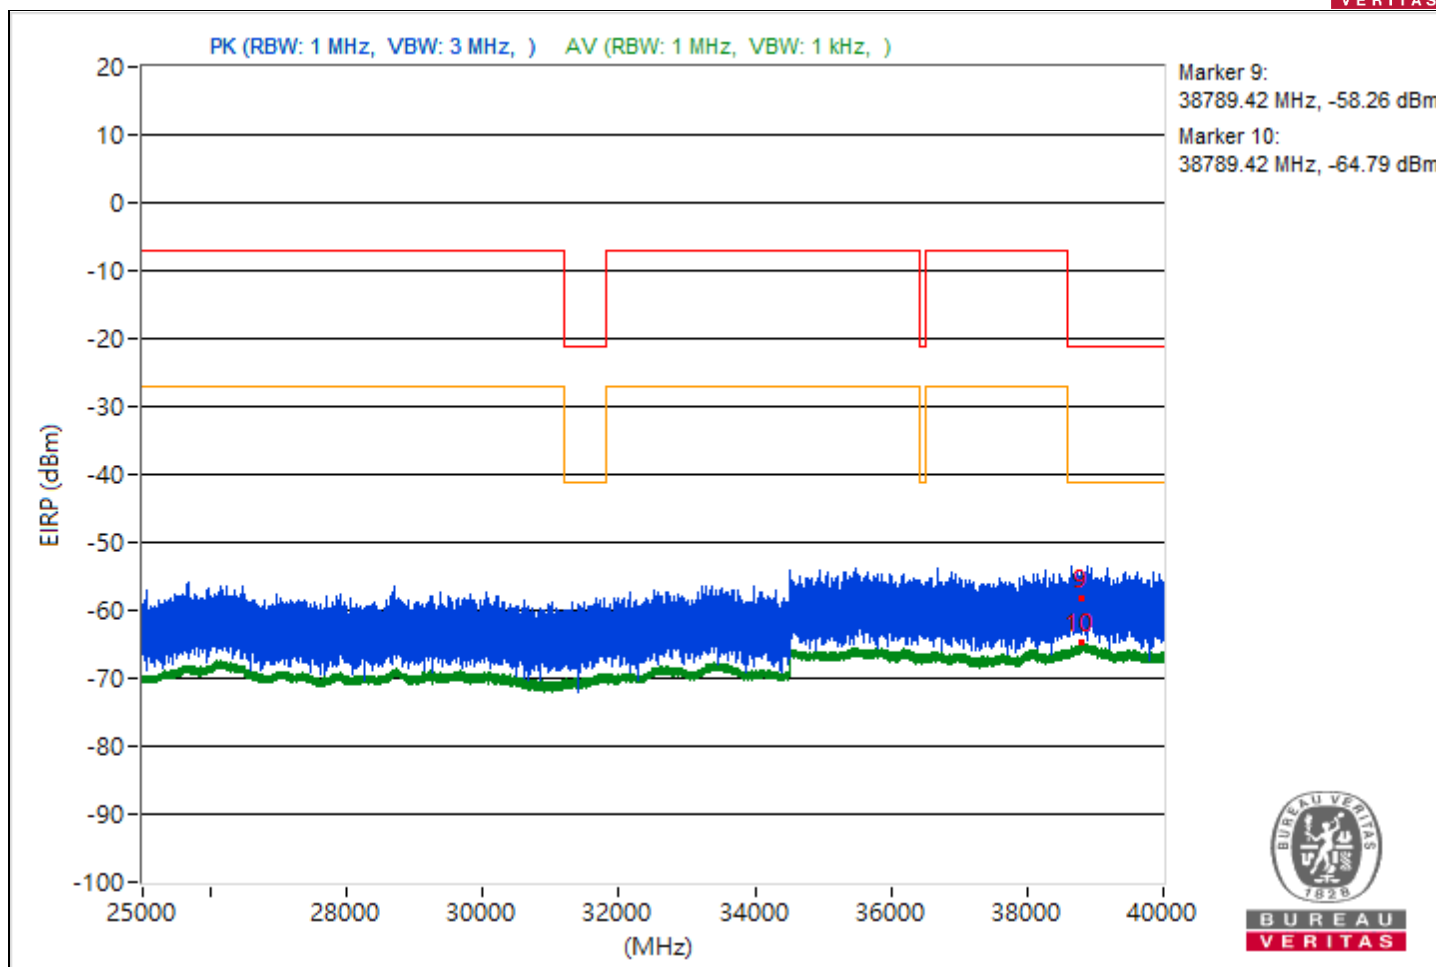


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3838.66	40.27 PK	74	-33.73	-59.91	4.92	-54.99
2	3838.66	34.75 AV	54	-19.25	-65.43	4.92	-60.51
3	14481.42	42.96 PK	74	-31.04	-57.22	4.92	-52.3
4	14481.42	33.68 AV	54	-20.32	-66.5	4.92	-61.58
5	21072.4	40.5 PK	74	-33.5	-59.68	4.92	-54.76
6	21072.4	35.33 AV	54	-18.67	-64.85	4.92	-59.93
7	22229.8	44.26 PK	74	-29.74	-55.92	4.92	-51
8	22229.8	36.72 AV	54	-17.28	-63.46	4.92	-58.54
9	38811.2	36.63 PK	74	-37.37	-63.55	4.92	-58.63
10	38811.2	30.33 AV	54	-23.67	-69.85	4.92	-64.93

Note: Margin value = Emission Level - Limit value

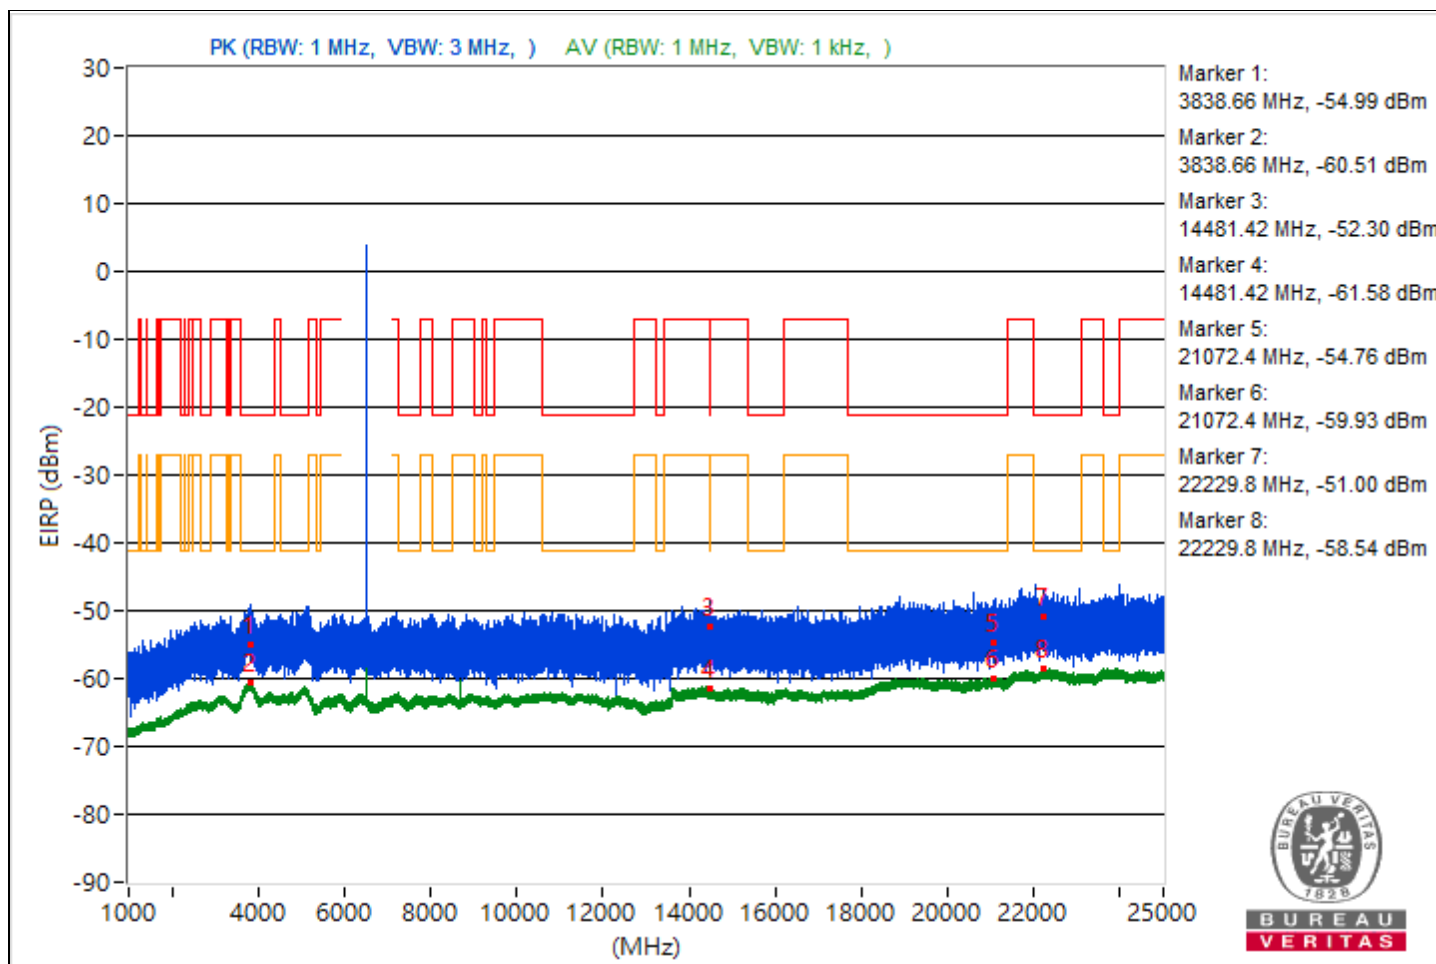


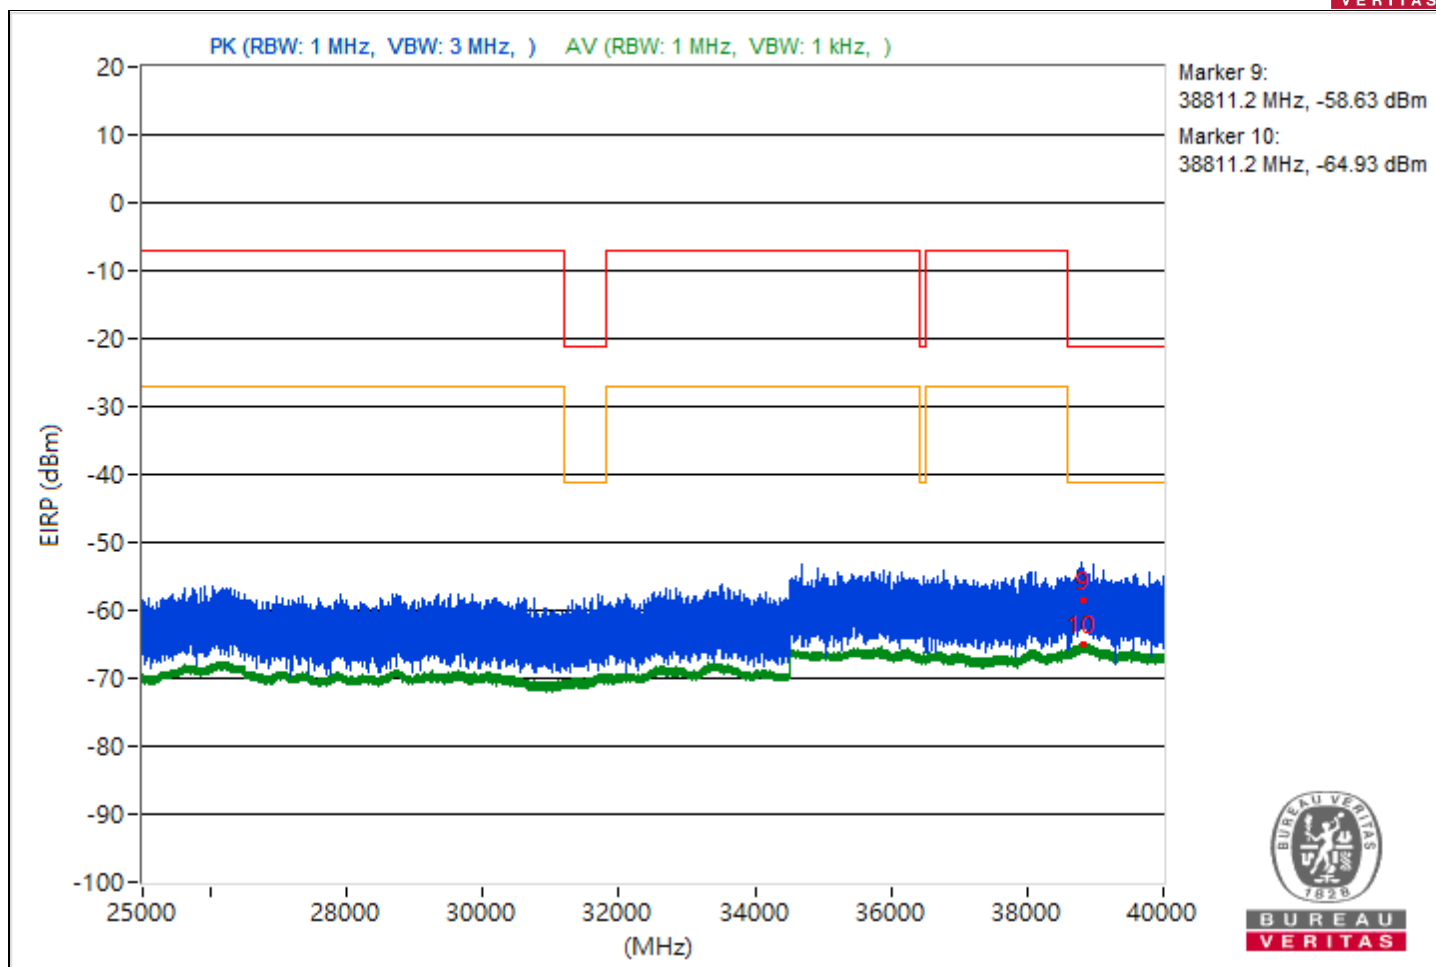


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.19	42.46 PK	74	-31.54	-57.72	4.92	-52.8
2	3810.19	34.63 AV	54	-19.37	-65.55	4.92	-60.63
3	14483.29	42.76 PK	74	-31.24	-57.42	4.92	-52.5
4	14483.29	33.62 AV	54	-20.38	-66.56	4.92	-61.64
5	21125.8	41.68 PK	74	-32.32	-58.5	4.92	-53.58
6	21125.8	35.52 AV	54	-18.48	-64.66	4.92	-59.74
7	23973.3	42.44 PK	74	-31.56	-57.74	4.92	-52.82
8	23973.3	36.75 AV	54	-17.25	-63.43	4.92	-58.51
9	38843.82	36.73 PK	74	-37.27	-63.45	4.92	-58.53
10	38843.82	30.45 AV	54	-23.55	-69.73	4.92	-64.81

Note: Margin value = Emission Level - Limit value

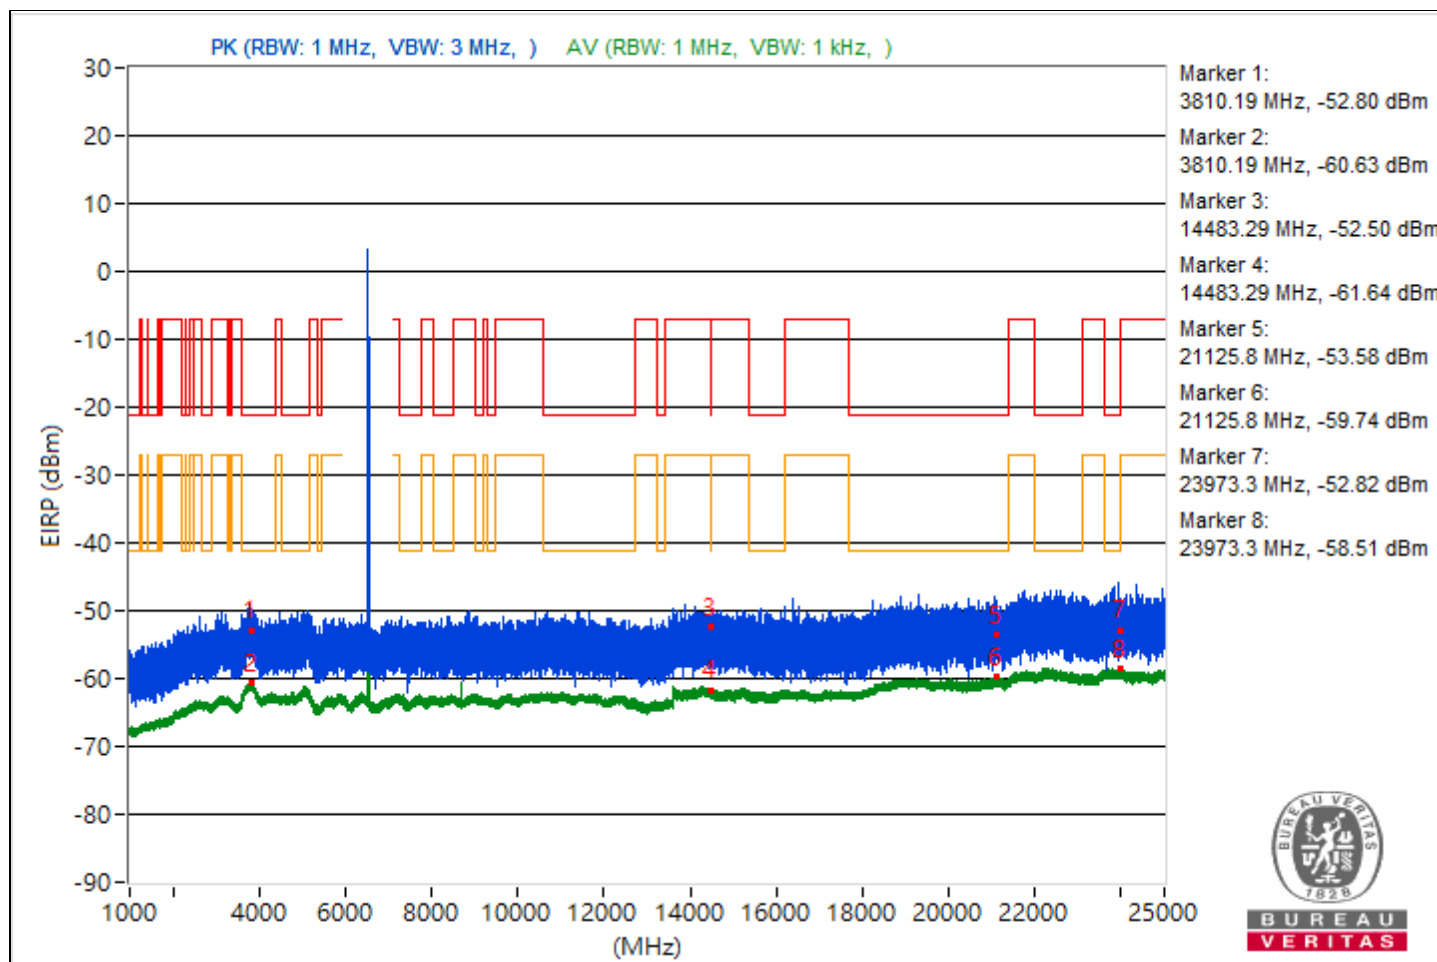


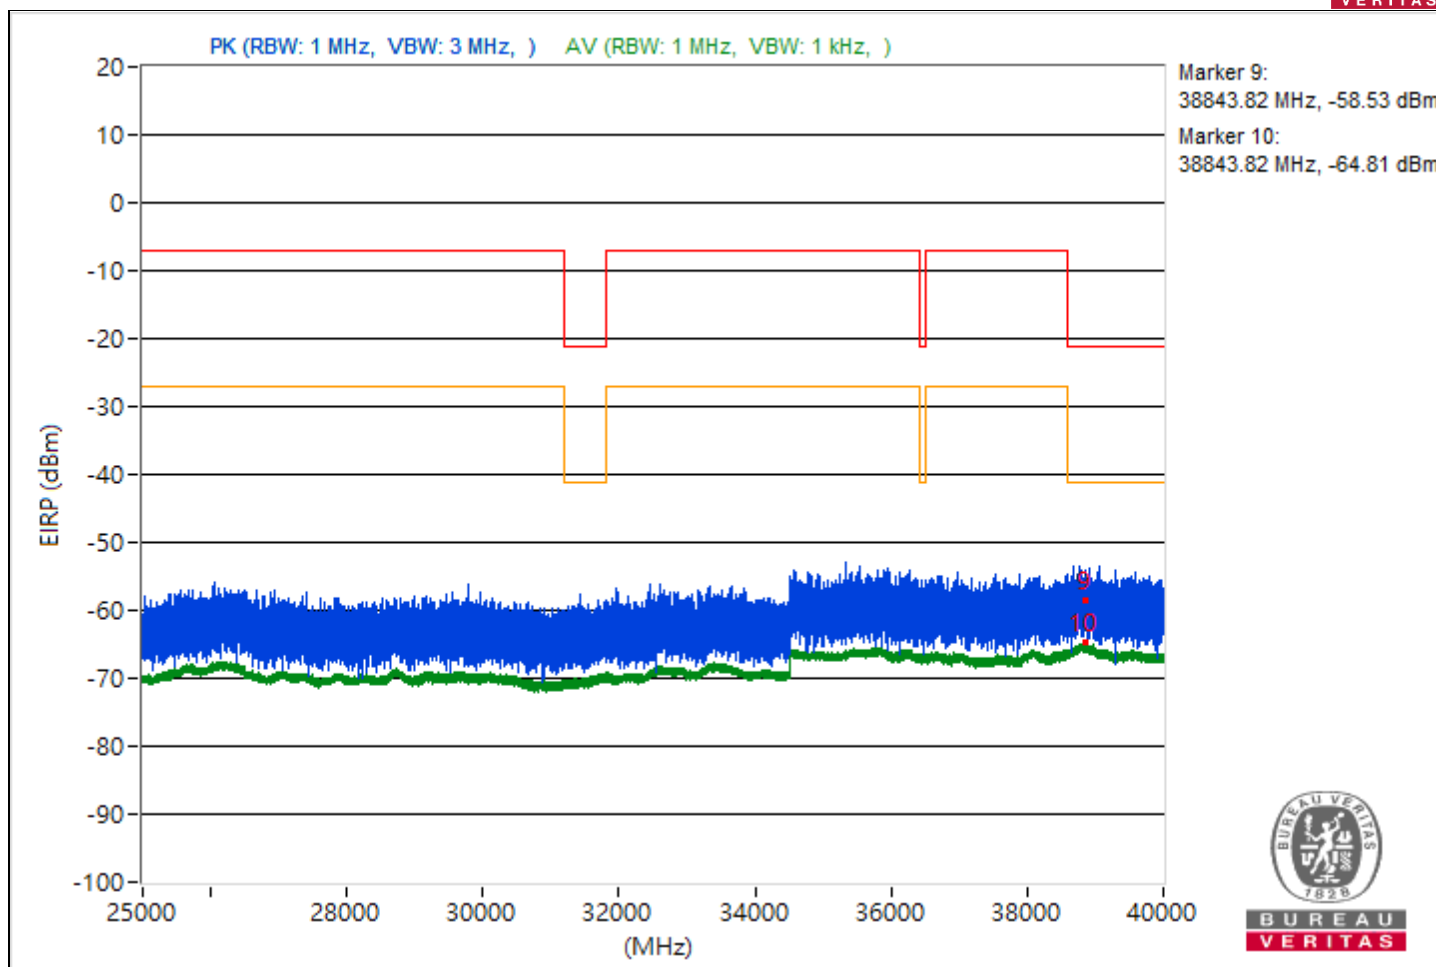


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.73	42.38 PK	74	-31.62	-57.8	4.92	-52.88
2	3796.73	34.62 AV	54	-19.38	-65.56	4.92	-60.64
3	15727.2	42.48 PK	74	-31.52	-57.7	4.92	-52.78
4	15727.2	33.49 AV	54	-20.51	-66.69	4.92	-61.77
5	21150.2	42.49 PK	74	-31.51	-57.69	4.92	-52.77
6	21150.2	35.43 AV	54	-18.57	-64.75	4.92	-59.83
7	23679.4	43.4 PK	74	-30.6	-56.78	4.92	-51.86
8	23679.4	36.64 AV	54	-17.36	-63.54	4.92	-58.62
9	38824.18	38.65 PK	74	-35.35	-61.53	4.92	-56.61
10	38824.18	30.45 AV	54	-23.55	-69.73	4.92	-64.81

Note: Margin value = Emission Level - Limit value

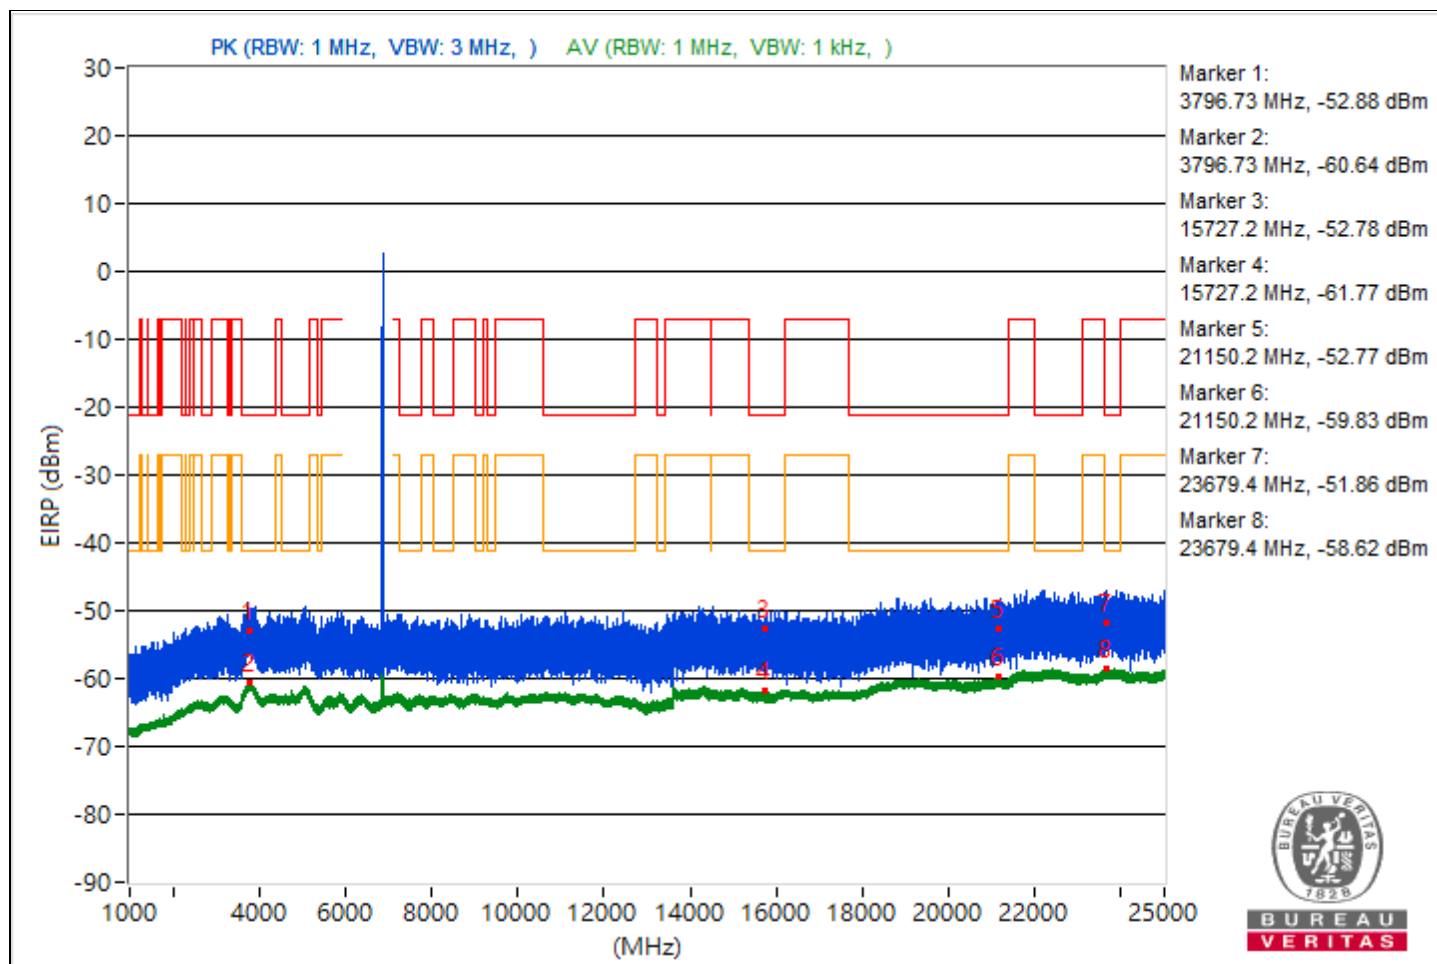


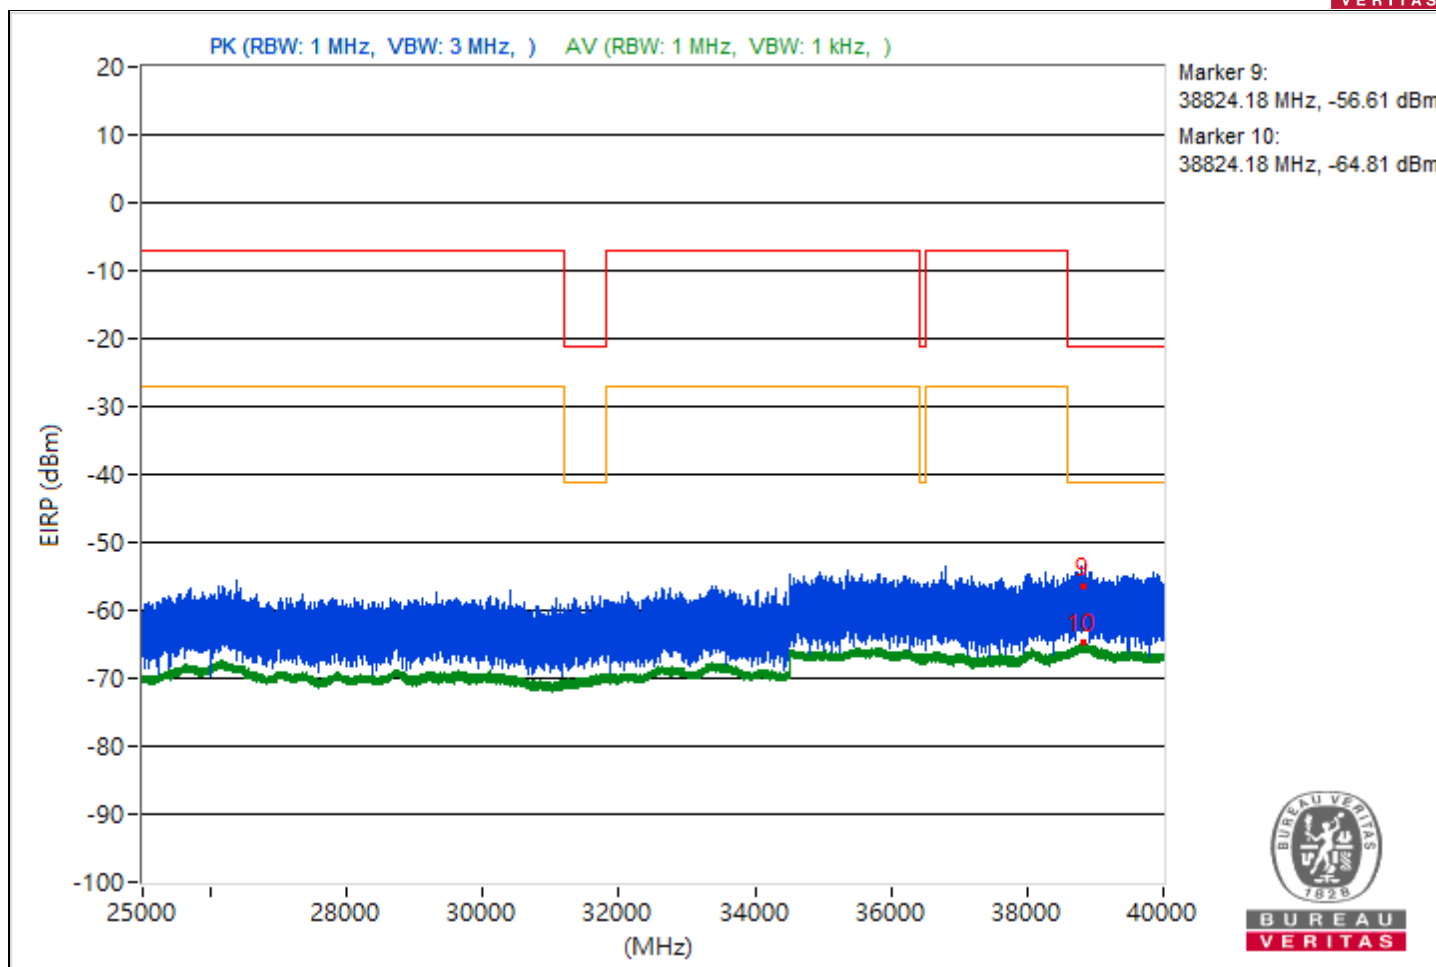


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.51	40.78 PK	74	-33.22	-59.4	4.92	-54.48
2	3811.51	34.78 AV	54	-19.22	-65.4	4.92	-60.48
3	14496.27	43.03 PK	74	-30.97	-57.15	4.92	-52.23
4	14496.27	33.54 AV	54	-20.46	-66.64	4.92	-61.72
5	18980.2	39.98 PK	74	-34.02	-60.2	4.92	-55.28
6	18980.2	35.43 AV	54	-18.57	-64.75	4.92	-59.83
7	22307.5	43.13 PK	74	-30.87	-57.05	4.92	-52.13
8	22307.5	36.65 AV	54	-17.35	-63.53	4.92	-58.61
9	38801.96	37.07 PK	74	-36.93	-63.11	4.92	-58.19
10	38801.96	30.36 AV	54	-23.64	-69.82	4.92	-64.9

Note: Margin value = Emission Level - Limit value

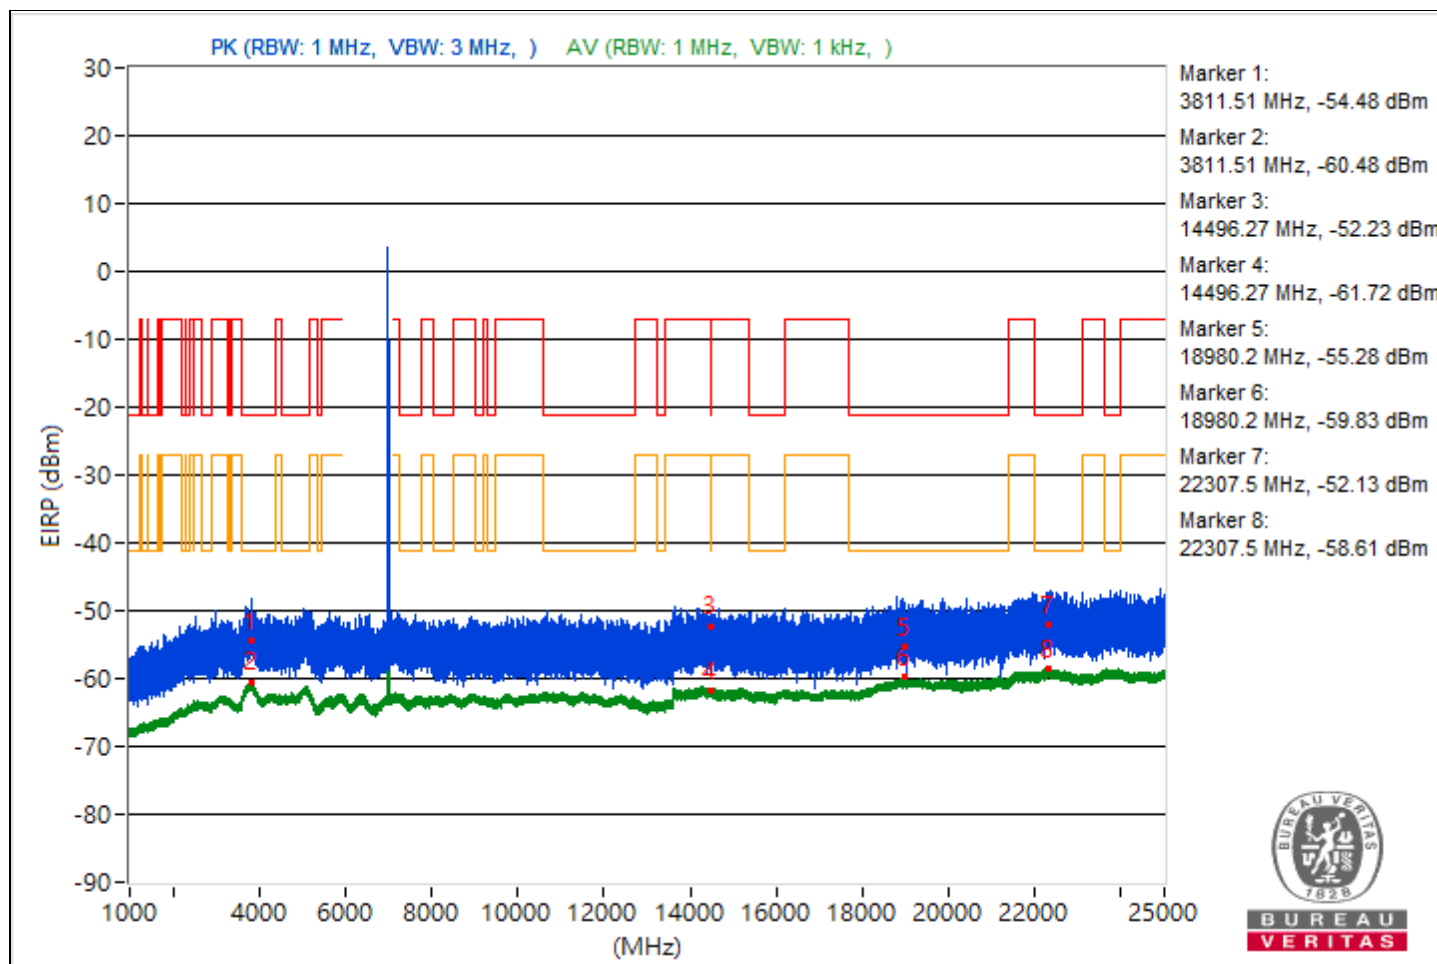


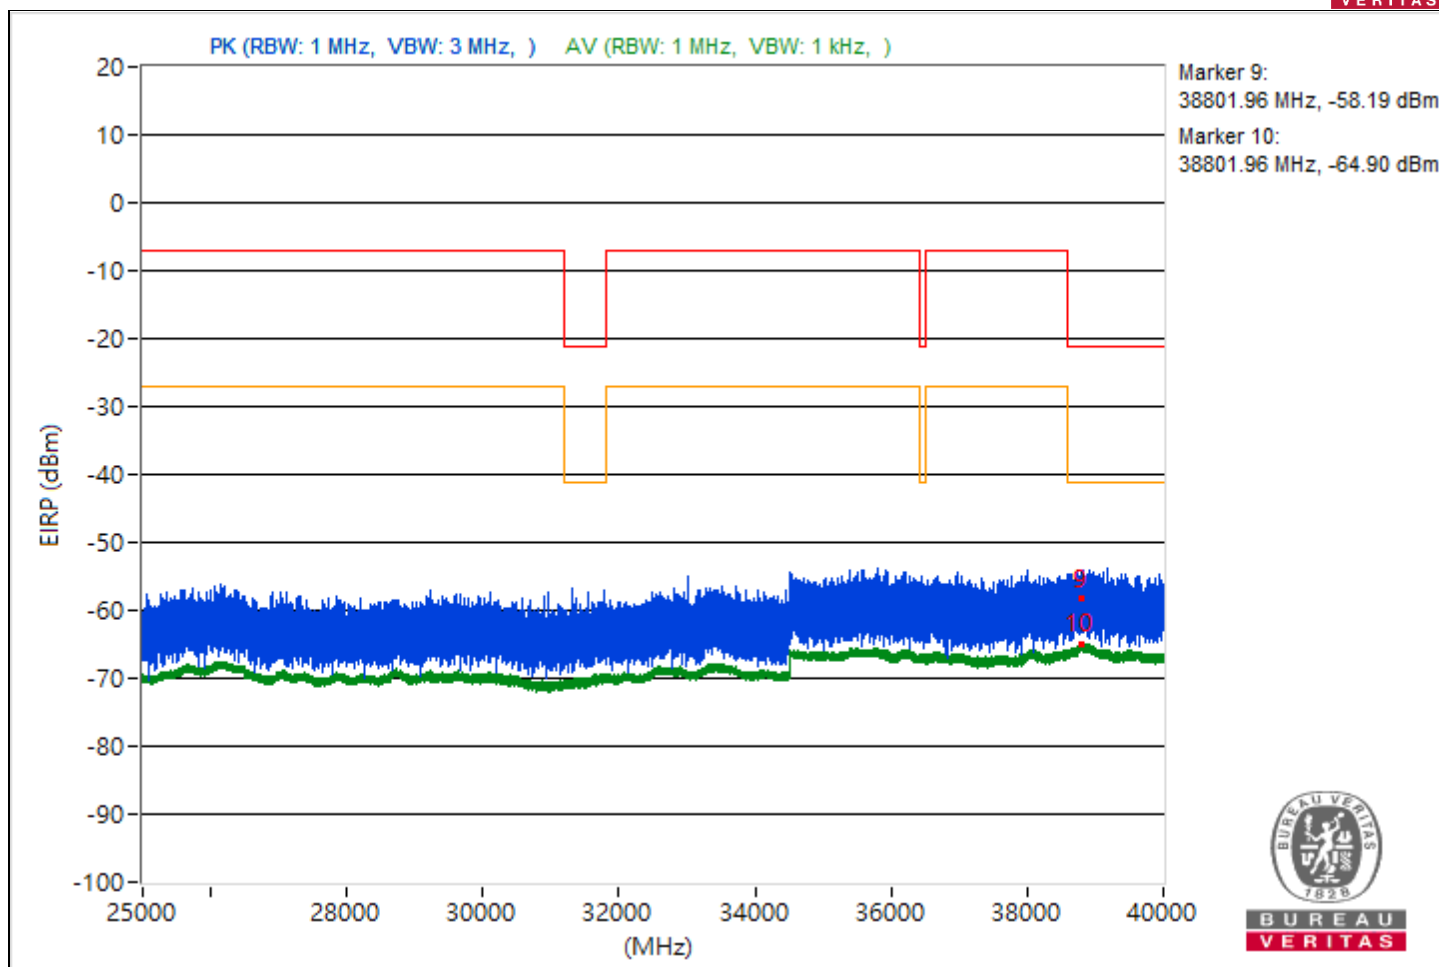


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3793.86	41.58 PK	74	-32.42	-58.6	4.92	-53.68
2	3793.86	34.64 AV	54	-19.36	-65.54	4.92	-60.62
3	14499.02	38.8 PK	74	-35.2	-61.38	4.92	-56.46
4	14499.02	33.6 AV	54	-20.4	-66.58	4.92	-61.66
5	21178.3	43.95 PK	74	-30.05	-56.23	4.92	-51.31
6	21178.3	35.39 AV	54	-18.61	-64.79	4.92	-59.87
7	22523.3	44.04 PK	74	-29.96	-56.14	4.92	-51.22
8	22523.3	36.69 AV	54	-17.31	-63.49	4.92	-58.57
9	38824.27	35.56 PK	74	-38.44	-64.62	4.92	-59.7
10	38824.27	30.41 AV	54	-23.59	-69.77	4.92	-64.85

Note: Margin value = Emission Level - Limit value

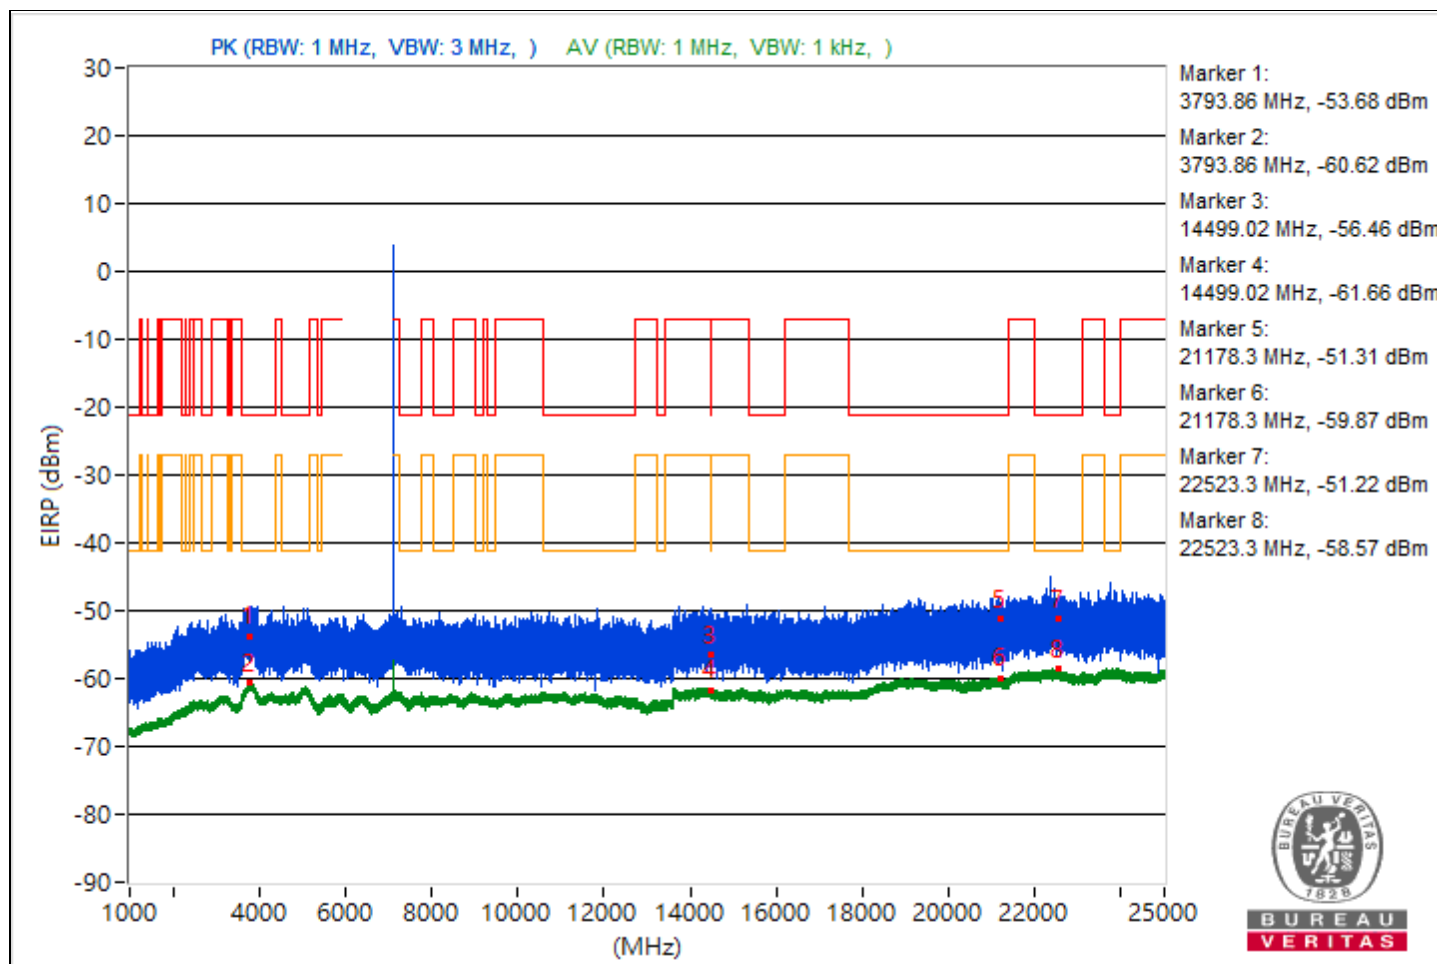


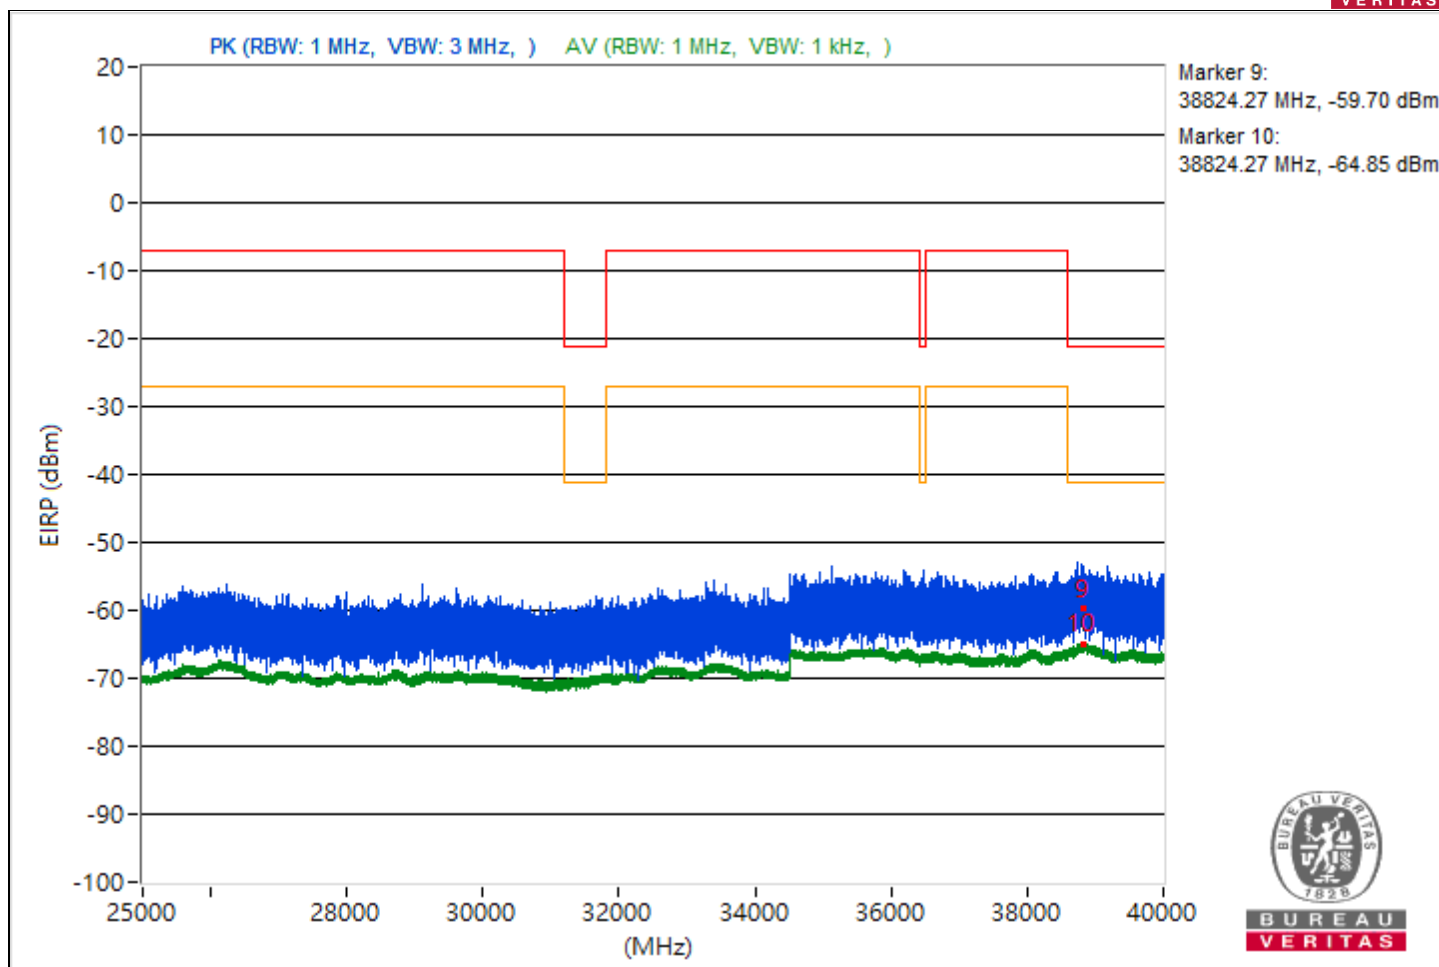


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3776.43	40.66 PK	74	-33.34	-59.52	4.92	-54.6
2	3776.43	34.65 AV	54	-19.35	-65.53	4.92	-60.61
3	14497.6	41.21 PK	74	-32.79	-58.97	4.92	-54.05
4	14497.6	33.81 AV	54	-20.19	-66.37	4.92	-61.45
5	21158.8	42.08 PK	74	-31.92	-58.1	4.92	-53.18
6	21158.8	35.37 AV	54	-18.63	-64.81	4.92	-59.89
7	22308.2	44.57 PK	74	-29.43	-55.61	4.92	-50.69
8	22308.2	36.71 AV	54	-17.29	-63.47	4.92	-58.55
9	38878.58	35.04 PK	74	-38.96	-65.14	4.92	-60.22
10	38878.58	30.47 AV	54	-23.53	-69.71	4.92	-64.79

Note: Margin value = Emission Level - Limit value

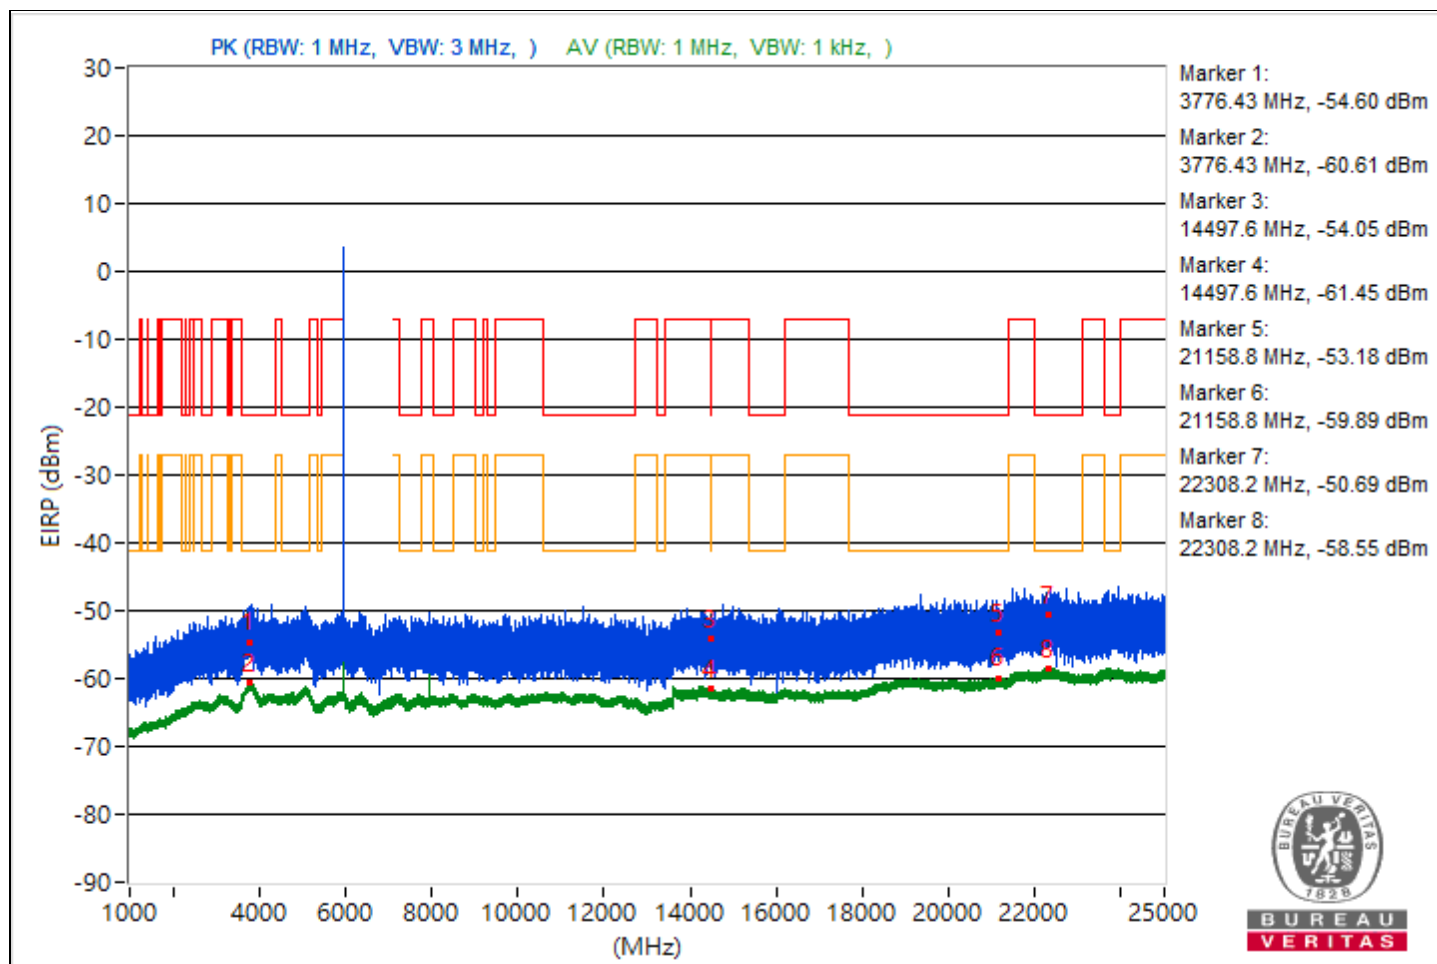


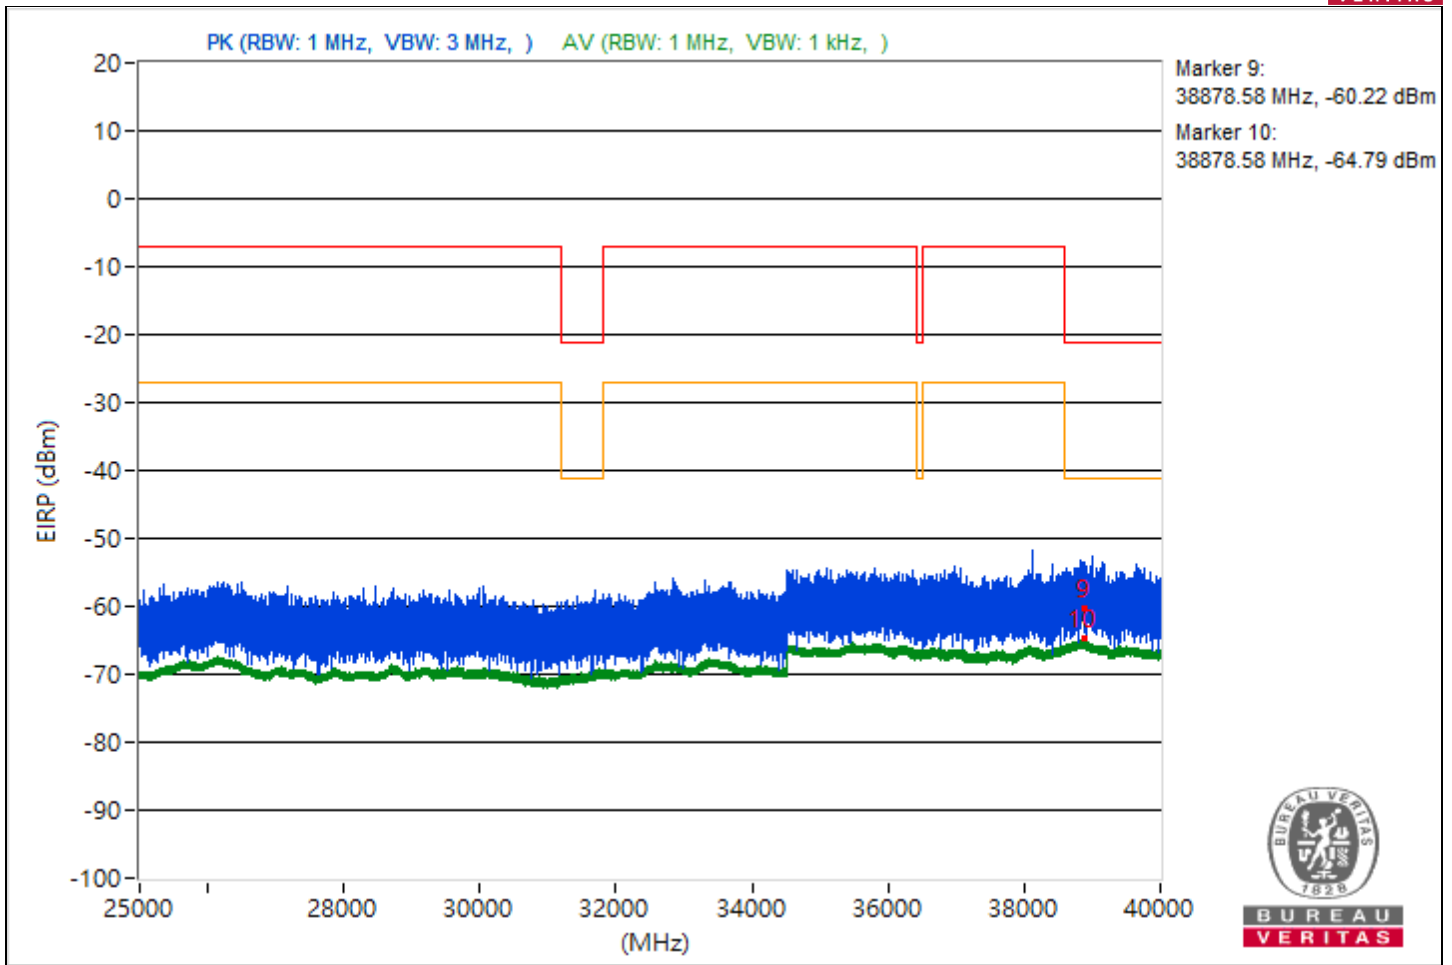


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3776.98	42.85 PK	74	-31.15	-57.33	4.92	-52.41
2	3776.98	34.43 AV	54	-19.57	-65.75	4.92	-60.83
3	14489.33	41.01 PK	74	-32.99	-59.17	4.92	-54.25
4	14489.33	33.67 AV	54	-20.33	-66.51	4.92	-61.59
5	21158.4	43.3 PK	74	-30.7	-56.88	4.92	-51.96
6	21158.4	35.37 AV	54	-18.63	-64.81	4.92	-59.89
7	22249.7	41.87 PK	74	-32.13	-58.31	4.92	-53.39
8	22249.7	36.75 AV	54	-17.25	-63.43	4.92	-58.51
9	38815.91	37.99 PK	74	-36.01	-62.19	4.92	-57.27
10	38815.91	30.46 AV	54	-23.54	-69.72	4.92	-64.8

Note: Margin value = Emission Level - Limit value

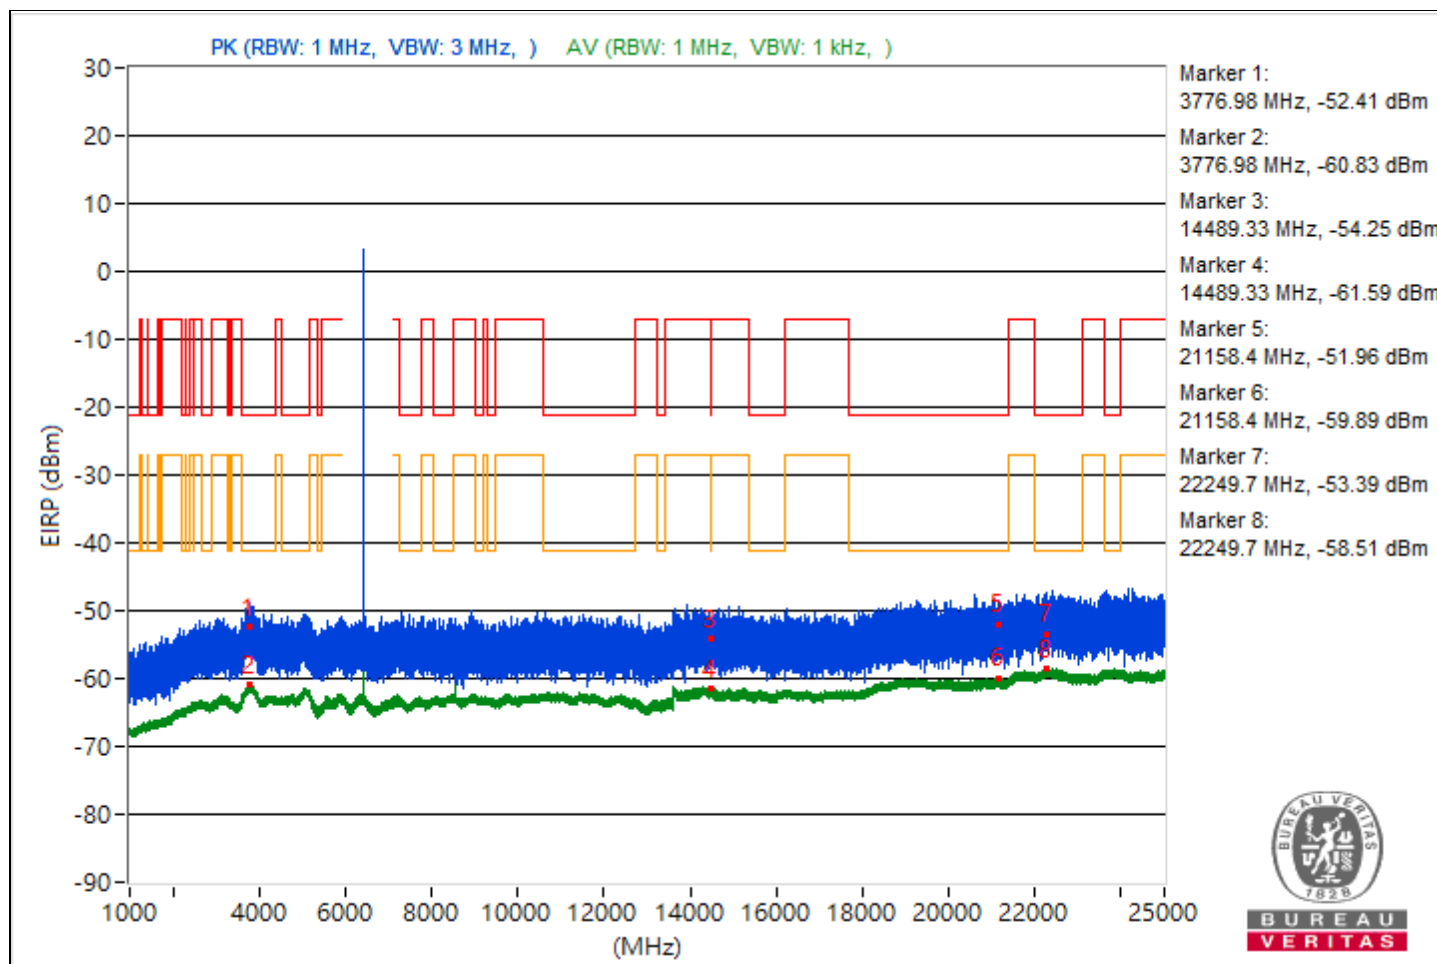


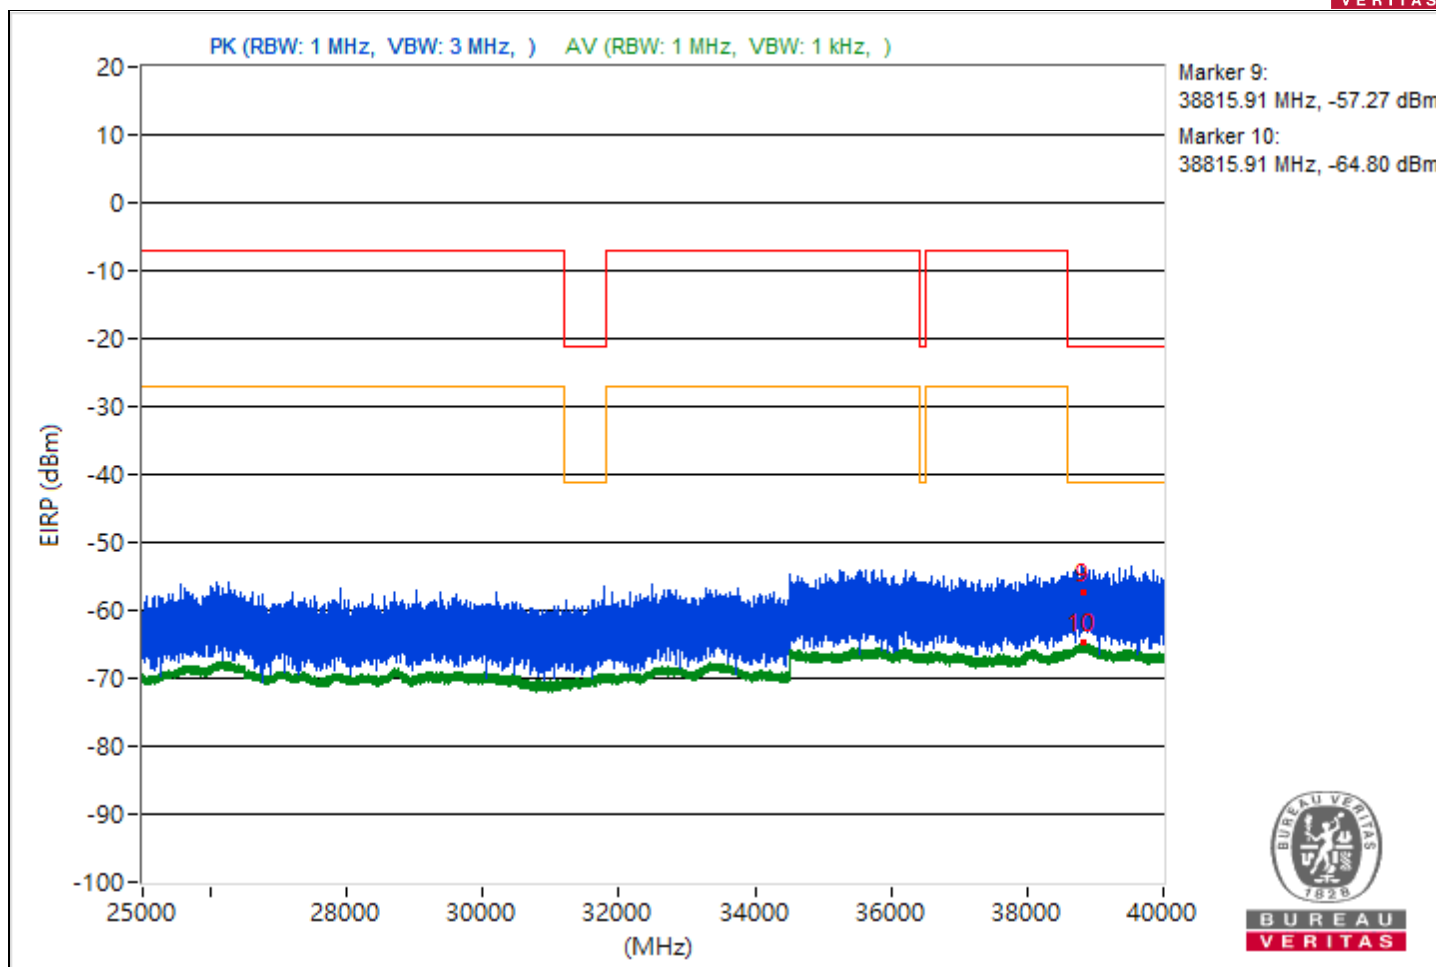


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.52	42.4 PK	74	-31.6	-57.78	4.92	-52.86
2	3791.52	34.48 AV	54	-19.52	-65.7	4.92	-60.78
3	14494.76	39.28 PK	74	-34.72	-60.9	4.92	-55.98
4	14494.76	33.75 AV	54	-20.25	-66.43	4.92	-61.51
5	21095.8	39.27 PK	74	-34.73	-60.91	4.92	-55.99
6	21095.8	35.41 AV	54	-18.59	-64.77	4.92	-59.85
7	23709.5	43.42 PK	74	-30.58	-56.76	4.92	-51.84
8	23709.5	36.83 AV	54	-17.17	-63.35	4.92	-58.43
9	38793.16	35.77 PK	74	-38.23	-64.41	4.92	-59.49
10	38793.16	30.43 AV	54	-23.57	-69.75	4.92	-64.83

Note: Margin value = Emission Level - Limit value

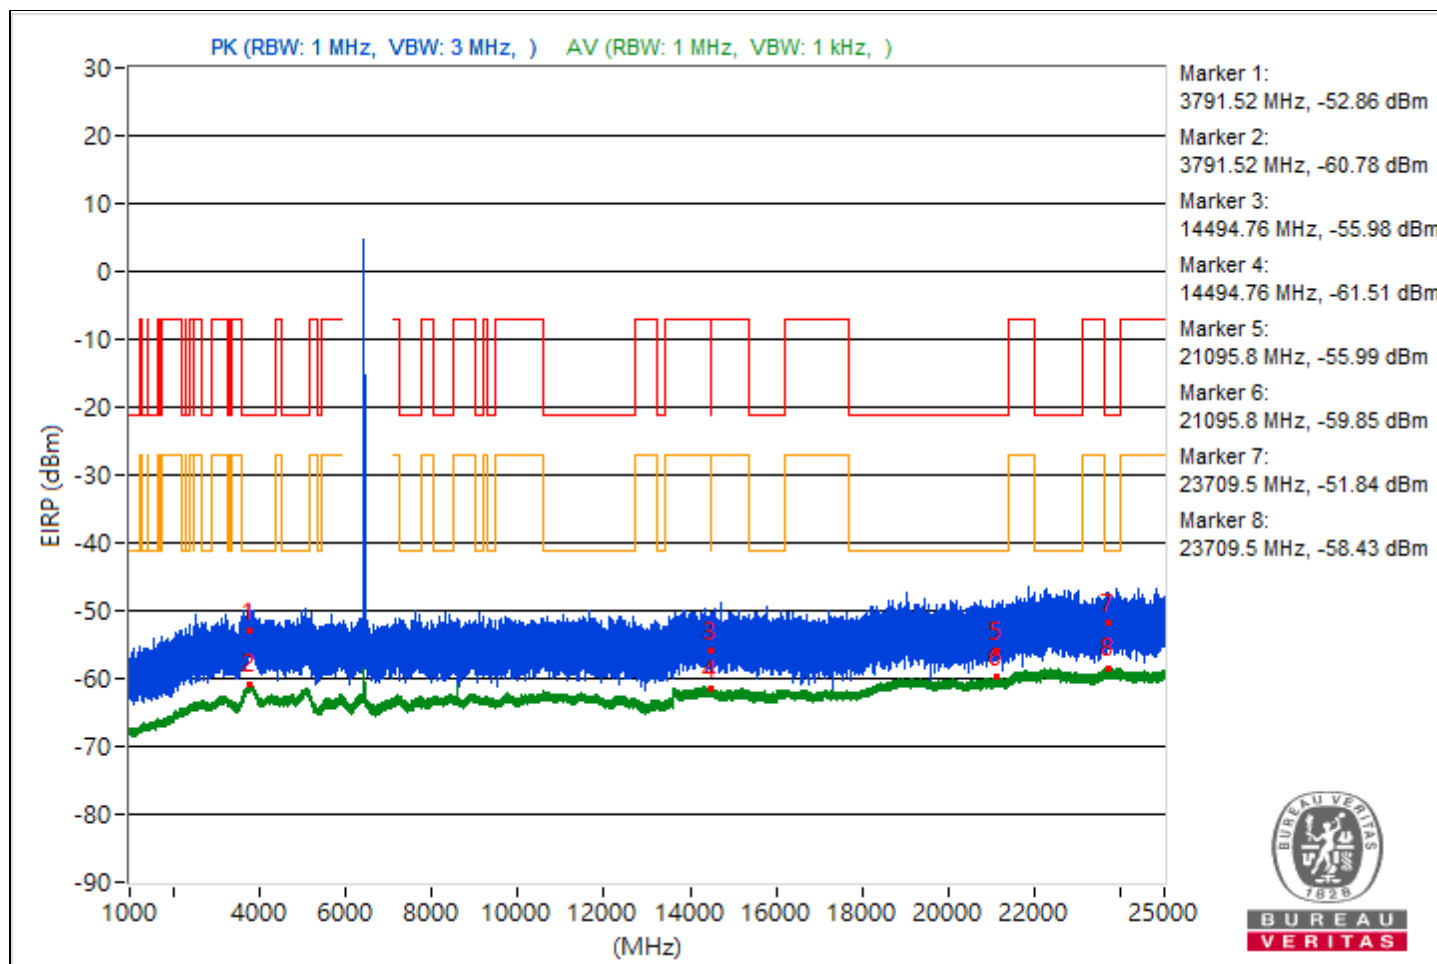


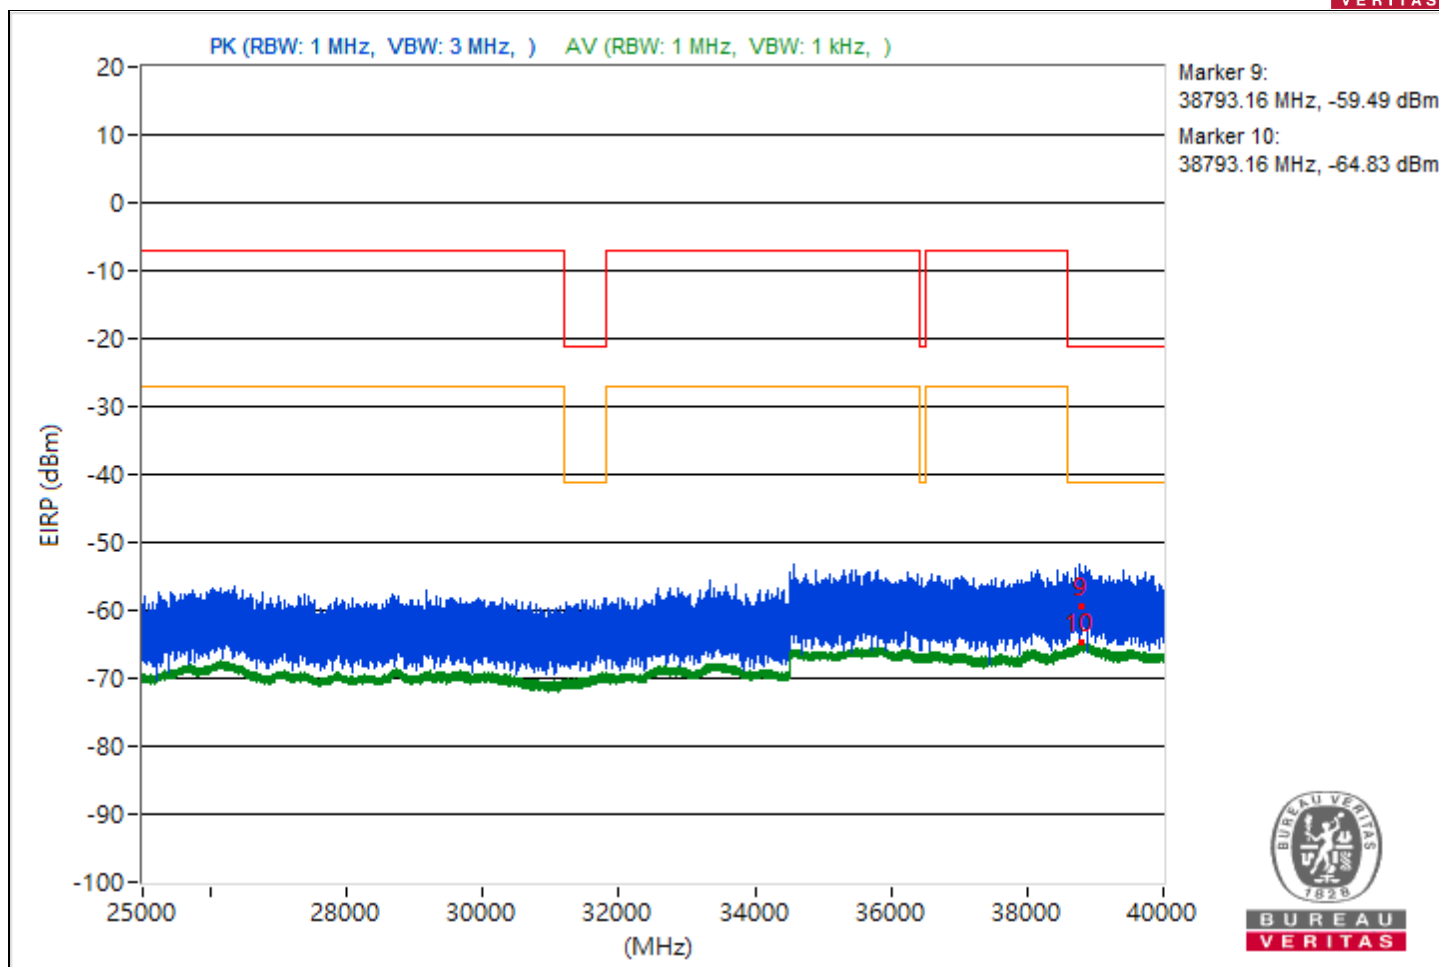


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3822.24	42.28 PK	74	-31.72	-57.9	4.92	-52.98
2	3822.24	34.56 AV	54	-19.44	-65.62	4.92	-60.7
3	14470.84	38.76 PK	74	-35.24	-61.42	4.92	-56.5
4	14470.84	33.71 AV	54	-20.29	-66.47	4.92	-61.55
5	20801.1	39.72 PK	74	-34.28	-60.46	4.92	-55.54
6	20801.1	35.49 AV	54	-18.51	-64.69	4.92	-59.77
7	23998.2	43.63 PK	74	-30.37	-56.55	4.92	-51.63
8	23998.2	36.69 AV	54	-17.31	-63.49	4.92	-58.57
9	38784.09	33.94 PK	74	-40.06	-66.24	4.92	-61.32
10	38784.09	30.5 AV	54	-23.5	-69.68	4.92	-64.76

Note: Margin value = Emission Level - Limit value

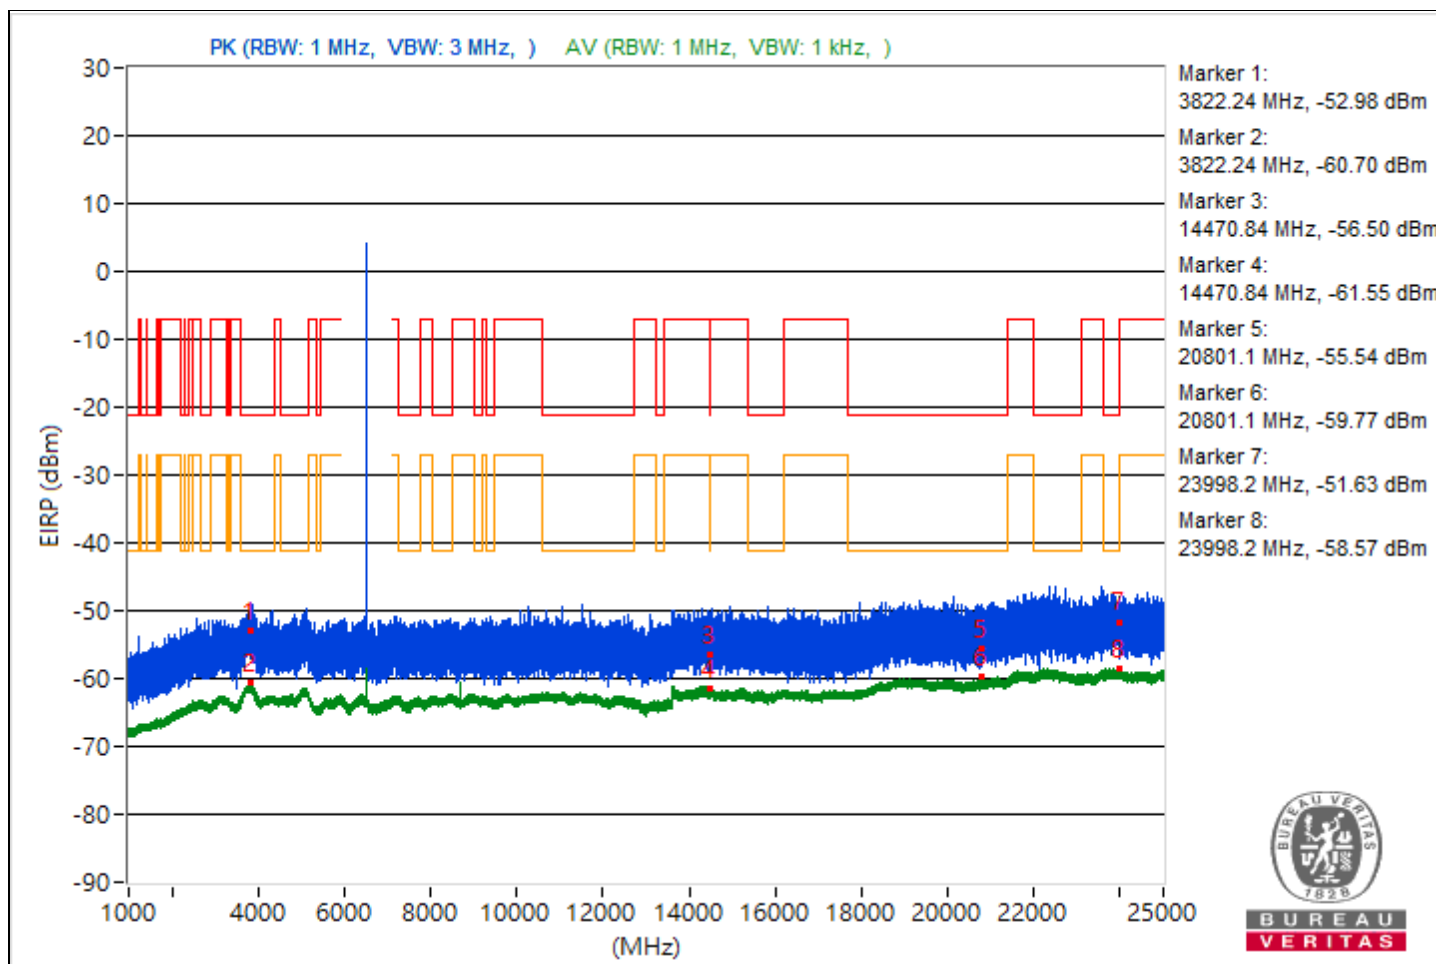


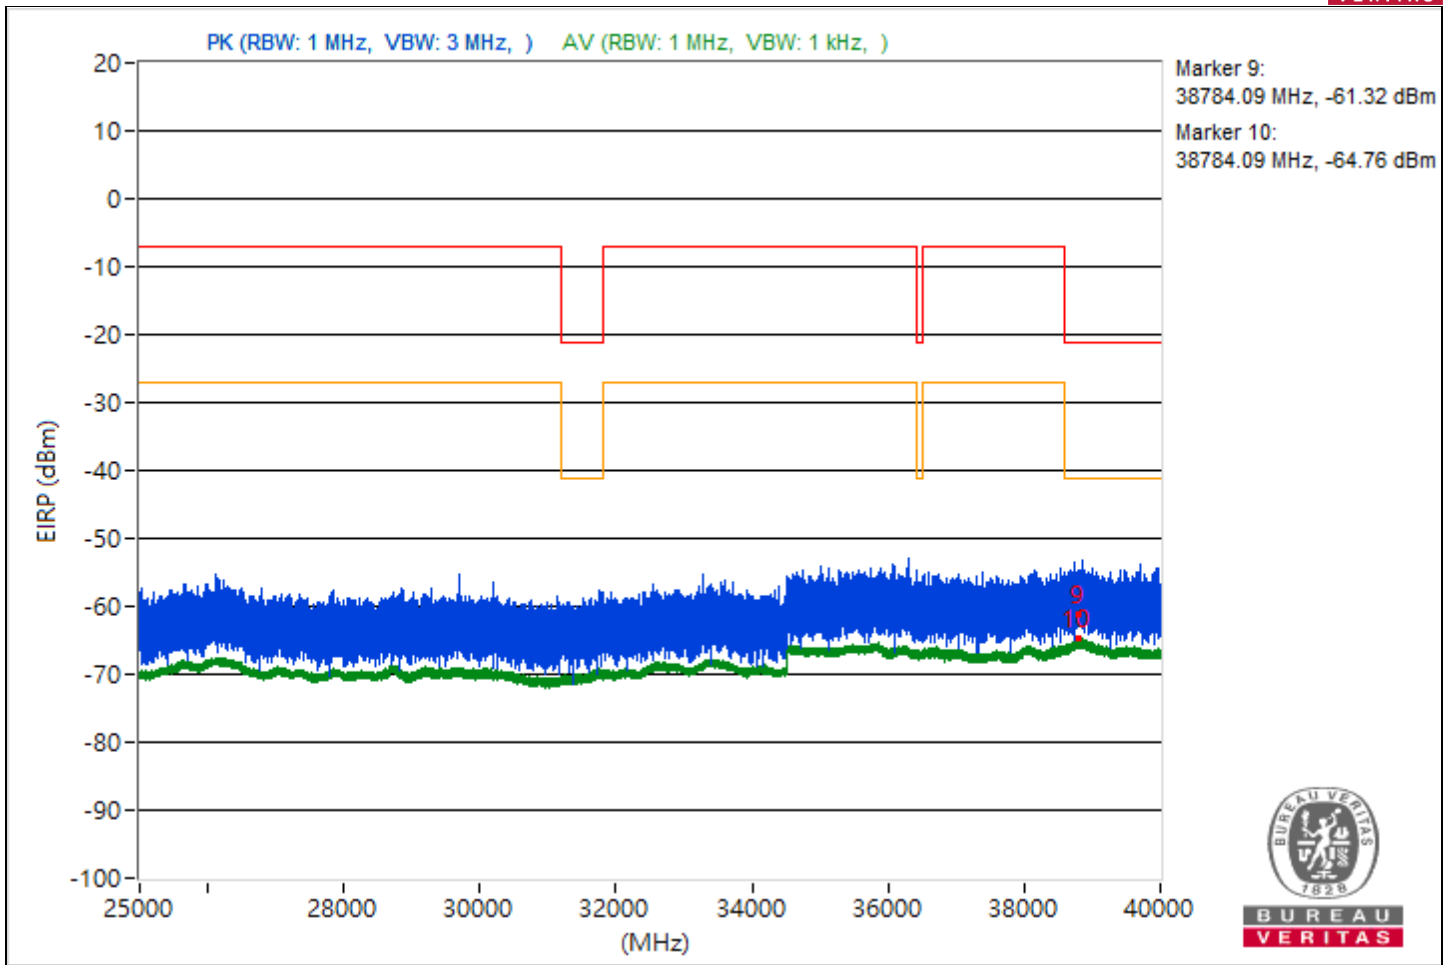


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.36	41.49 PK	74	-32.51	-58.69	4.92	-53.77
2	3797.36	34.49 AV	54	-19.51	-65.69	4.92	-60.77
3	14483.47	42.75 PK	74	-31.25	-57.43	4.92	-52.51
4	14483.47	33.74 AV	54	-20.26	-66.44	4.92	-61.52
5	21109.4	42.24 PK	74	-31.76	-57.94	4.92	-53.02
6	21109.4	35.34 AV	54	-18.66	-64.84	4.92	-59.92
7	22530.2	43.83 PK	74	-30.17	-56.35	4.92	-51.43
8	22530.2	36.75 AV	54	-17.25	-63.43	4.92	-58.51
9	38817.42	37.44 PK	74	-36.56	-62.74	4.92	-57.82
10	38817.42	30.39 AV	54	-23.61	-69.79	4.92	-64.87

Note: Margin value = Emission Level - Limit value

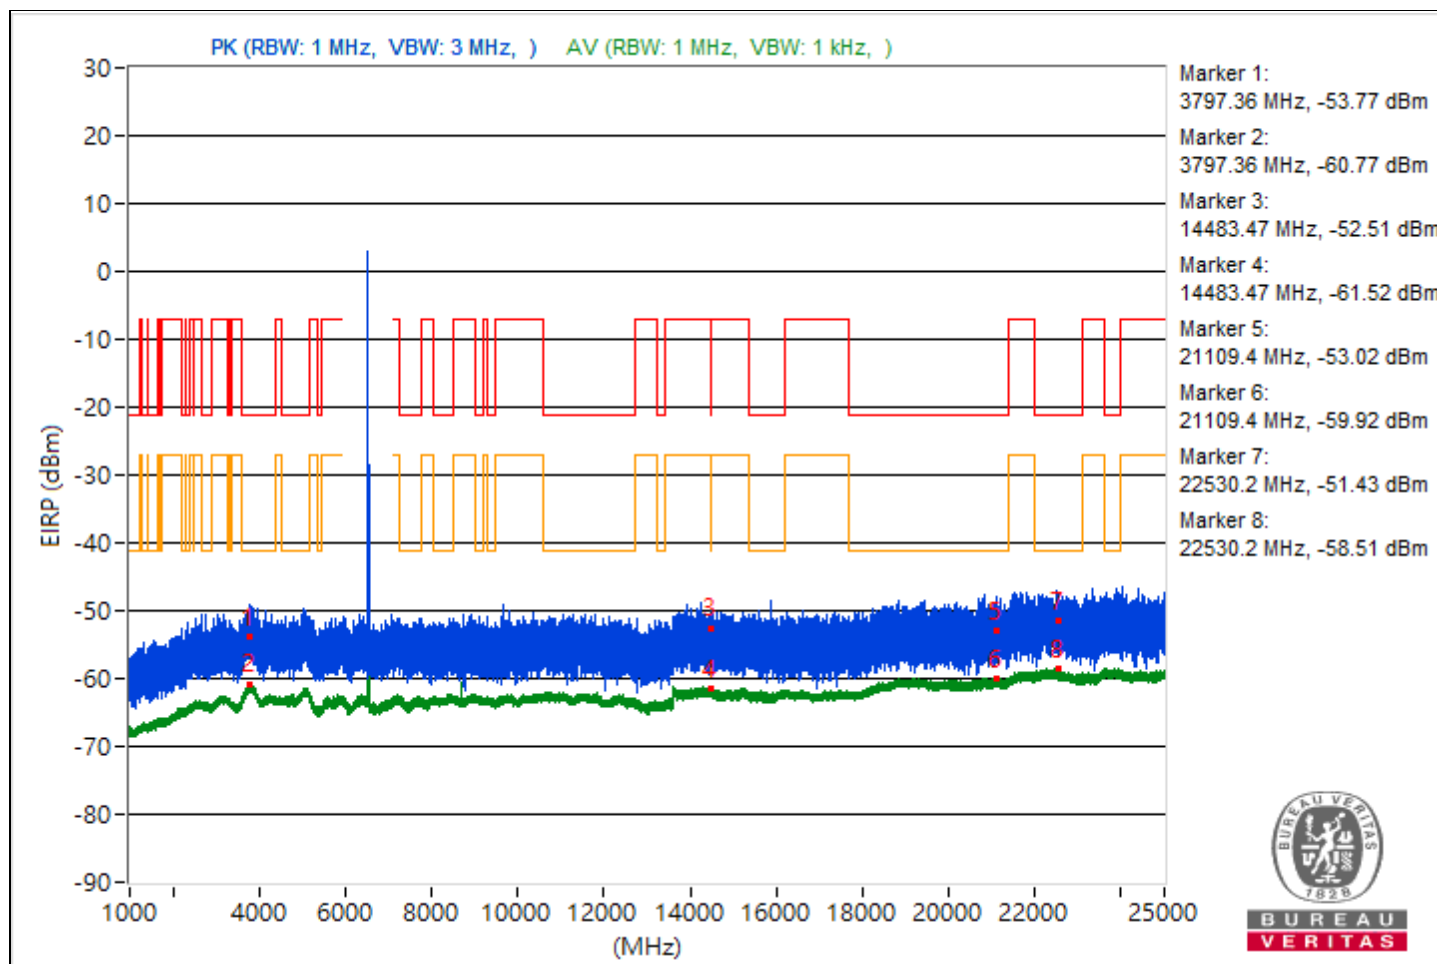


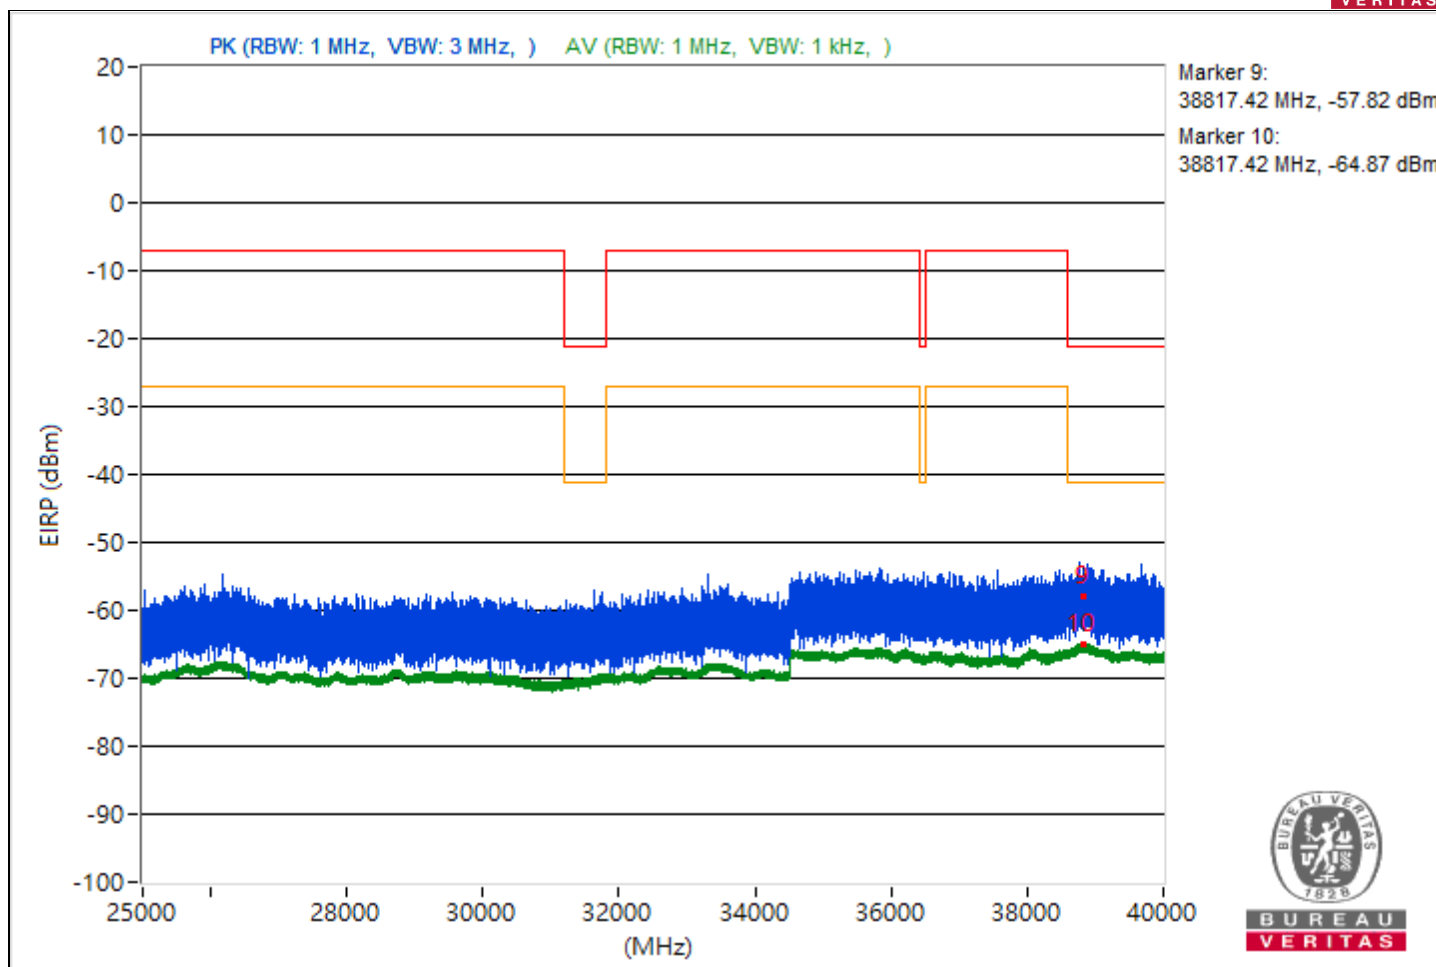


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.83	42.1 PK	74	-31.9	-58.08	4.92	-53.16
2	3798.83	34.53 AV	54	-19.47	-65.65	4.92	-60.73
3	14497.24	40.9 PK	74	-33.1	-59.28	4.92	-54.36
4	14497.24	33.59 AV	54	-20.41	-66.59	4.92	-61.67
5	21155.8	42.48 PK	74	-31.52	-57.7	4.92	-52.78
6	21155.8	35.56 AV	54	-18.44	-64.62	4.92	-59.7
7	23776.4	45.09 PK	74	-28.91	-55.09	4.92	-50.17
8	23776.4	36.81 AV	54	-17.19	-63.37	4.92	-58.45
9	38827.2	35.27 PK	74	-38.73	-64.91	4.92	-59.99
10	38827.2	30.49 AV	54	-23.51	-69.69	4.92	-64.77

Note: Margin value = Emission Level - Limit value

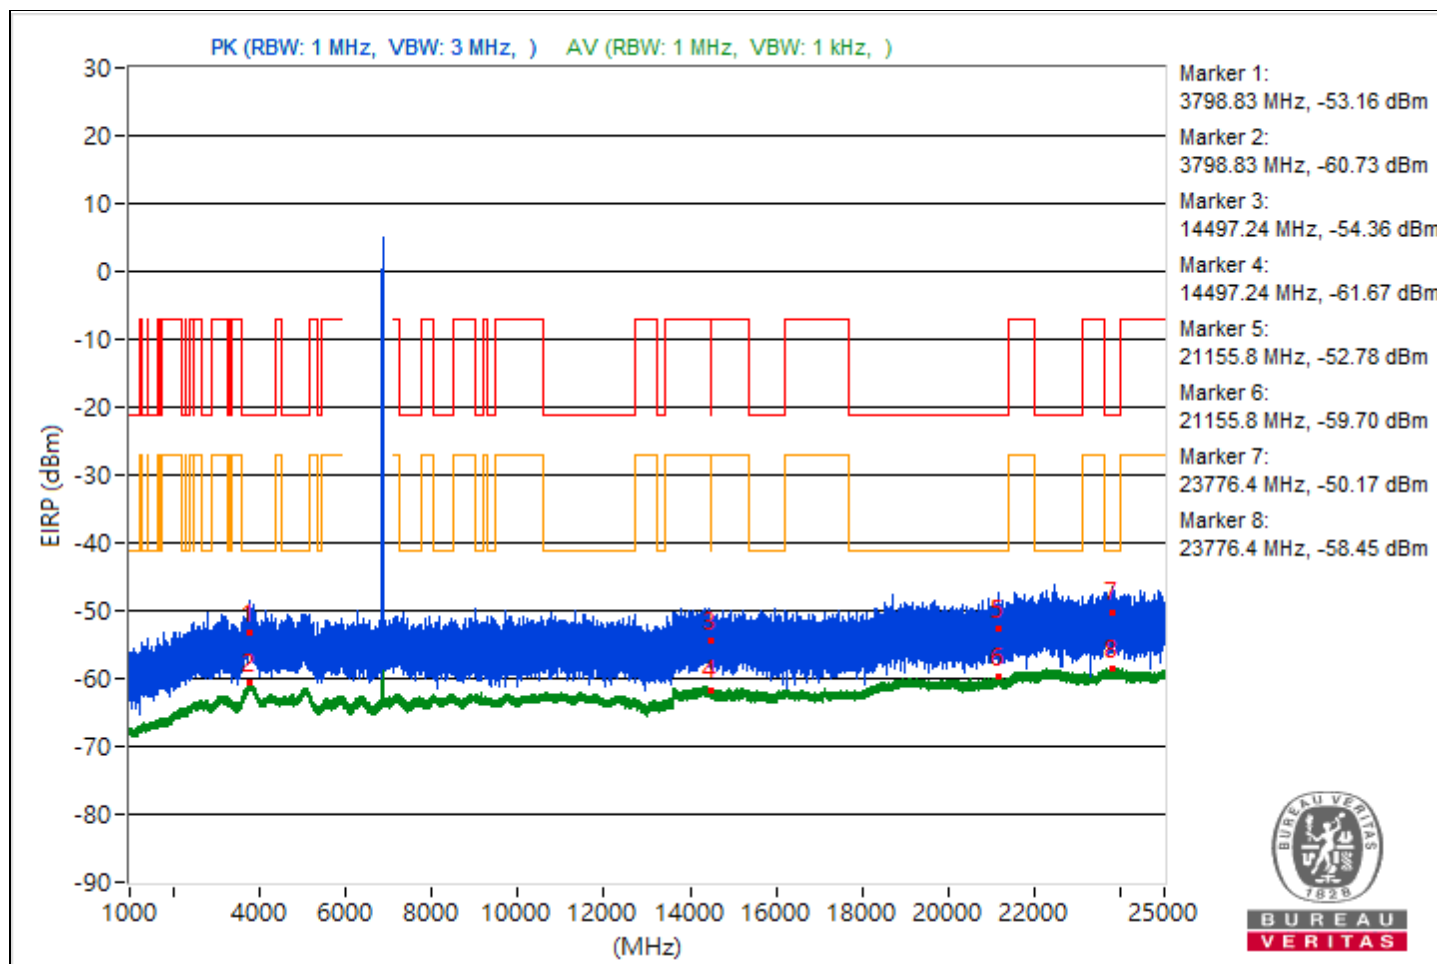


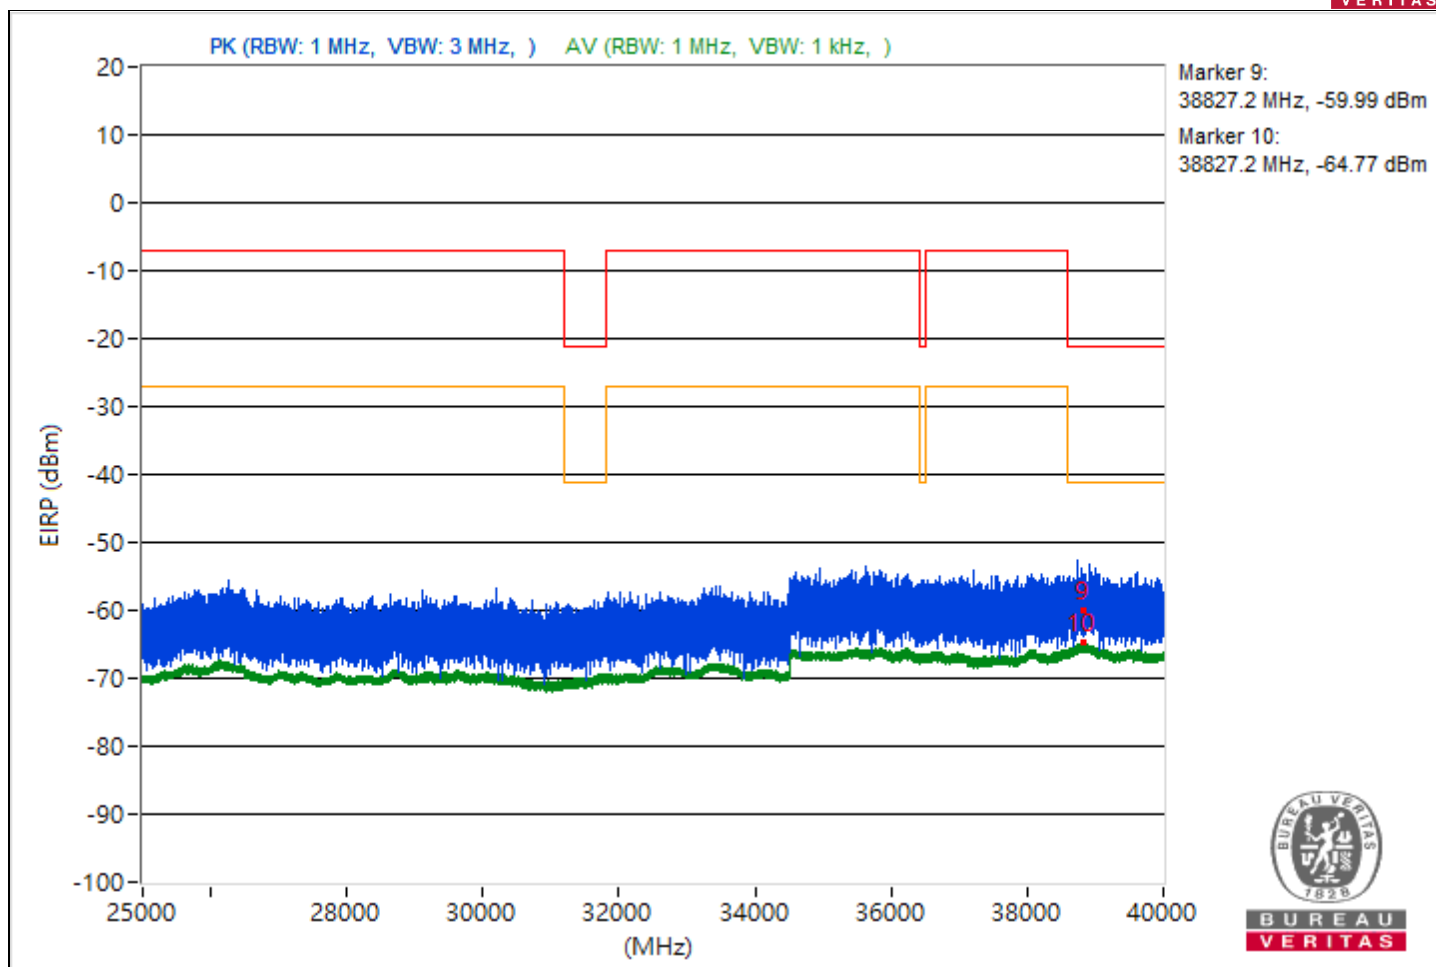


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.37	43.34 PK	74	-30.66	-56.84	4.92	-51.92
2	3791.37	34.54 AV	54	-19.46	-65.64	4.92	-60.72
3	14476.09	43.25 PK	74	-30.75	-56.93	4.92	-52.01
4	14476.09	33.65 AV	54	-20.35	-66.53	4.92	-61.61
5	21130.7	40.47 PK	74	-33.53	-59.71	4.92	-54.79
6	21130.7	35.45 AV	54	-18.55	-64.73	4.92	-59.81
7	22415.6	43.59 PK	74	-30.41	-56.59	4.92	-51.67
8	22415.6	36.67 AV	54	-17.33	-63.51	4.92	-58.59
9	38813.87	36.53 PK	74	-37.47	-63.65	4.92	-58.73
10	38813.87	30.45 AV	54	-23.55	-69.73	4.92	-64.81

Note: Margin value = Emission Level - Limit value

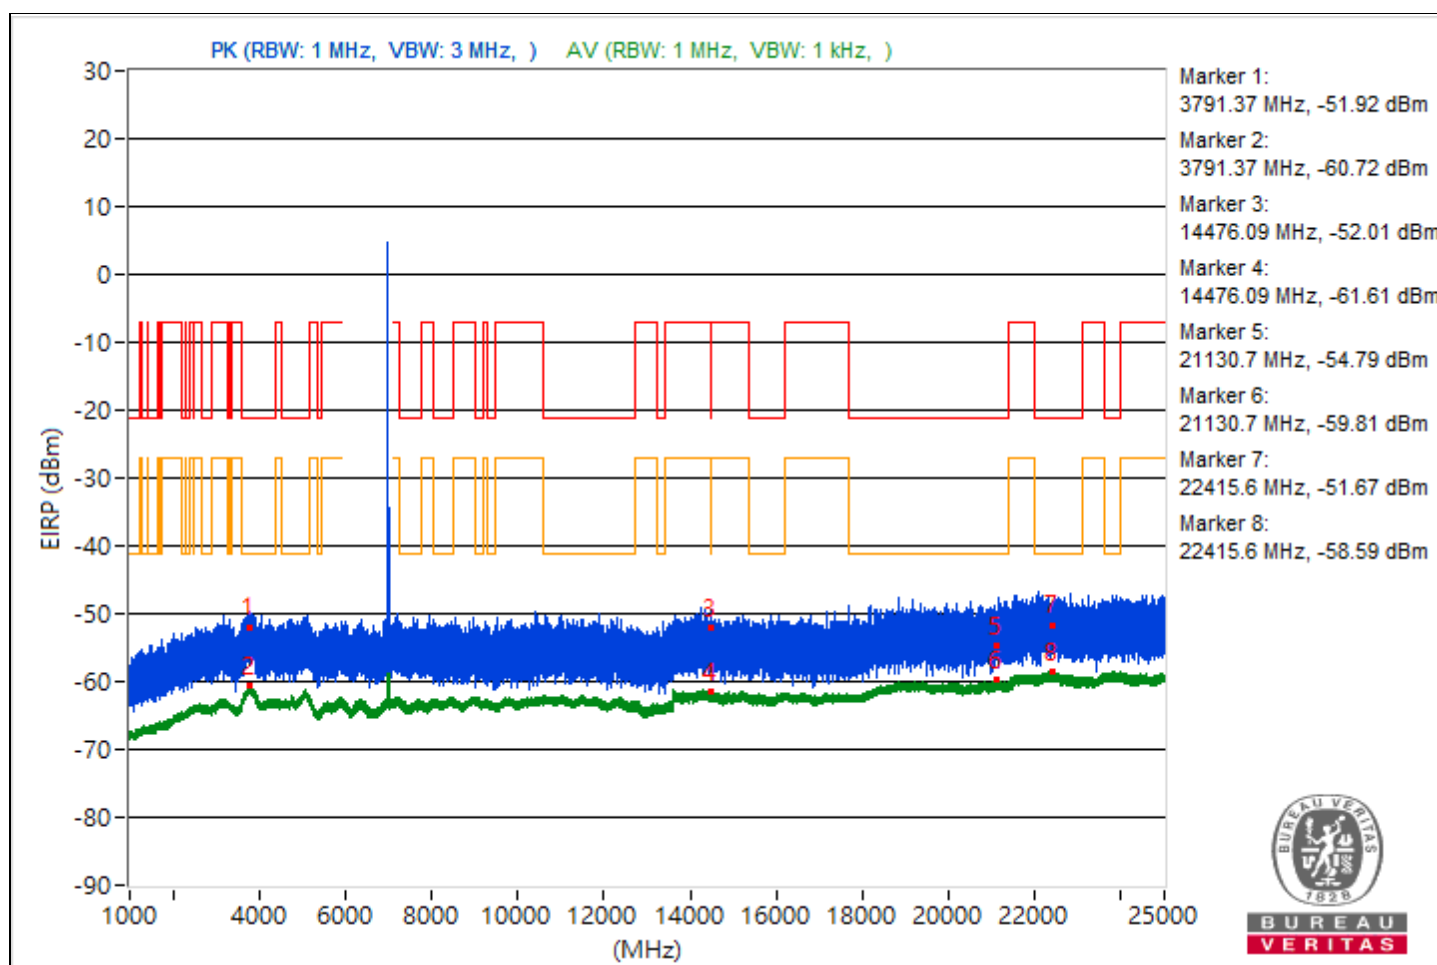


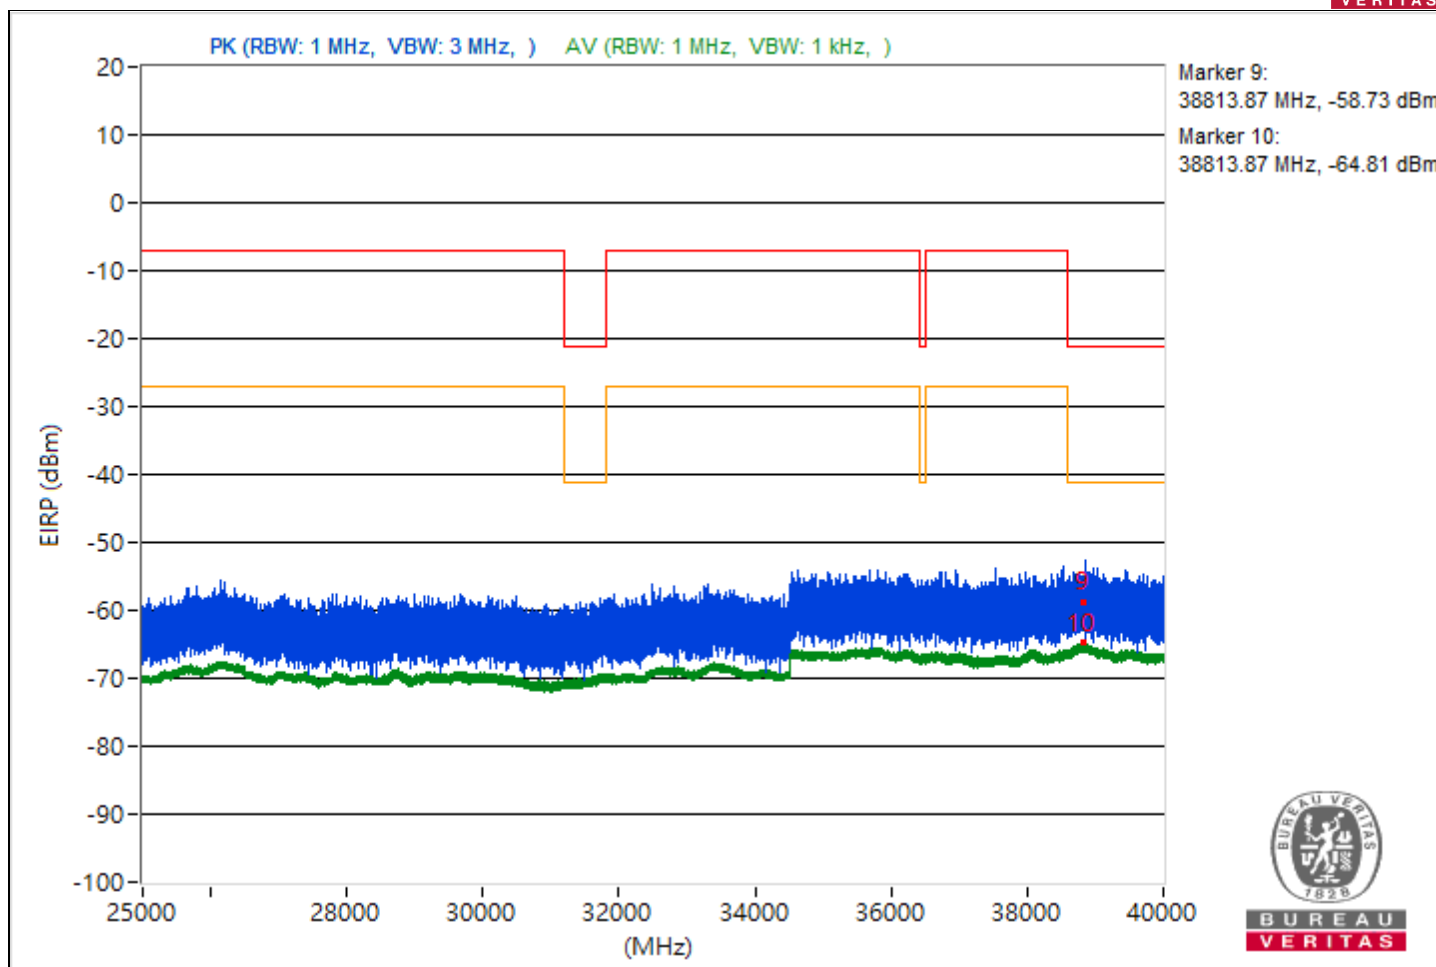


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.36	41.25 PK	74	-32.75	-58.93	4.92	-54.01
2	3811.36	34.5 AV	54	-19.5	-65.68	4.92	-60.76
3	14473.42	40.43 PK	74	-33.57	-59.75	4.92	-54.83
4	14473.42	33.56 AV	54	-20.44	-66.62	4.92	-61.7
5	21094.5	40.91 PK	74	-33.09	-59.27	4.92	-54.35
6	21094.5	35.43 AV	54	-18.57	-64.75	4.92	-59.83
7	23896.7	46.98 PK	74	-27.02	-53.2	4.92	-48.28
8	23896.7	36.93 AV	54	-17.07	-63.25	4.92	-58.33
9	38834.4	34.13 PK	74	-39.87	-66.05	4.92	-61.13
10	38834.4	30.46 AV	54	-23.54	-69.72	4.92	-64.8

Note: Margin value = Emission Level - Limit value

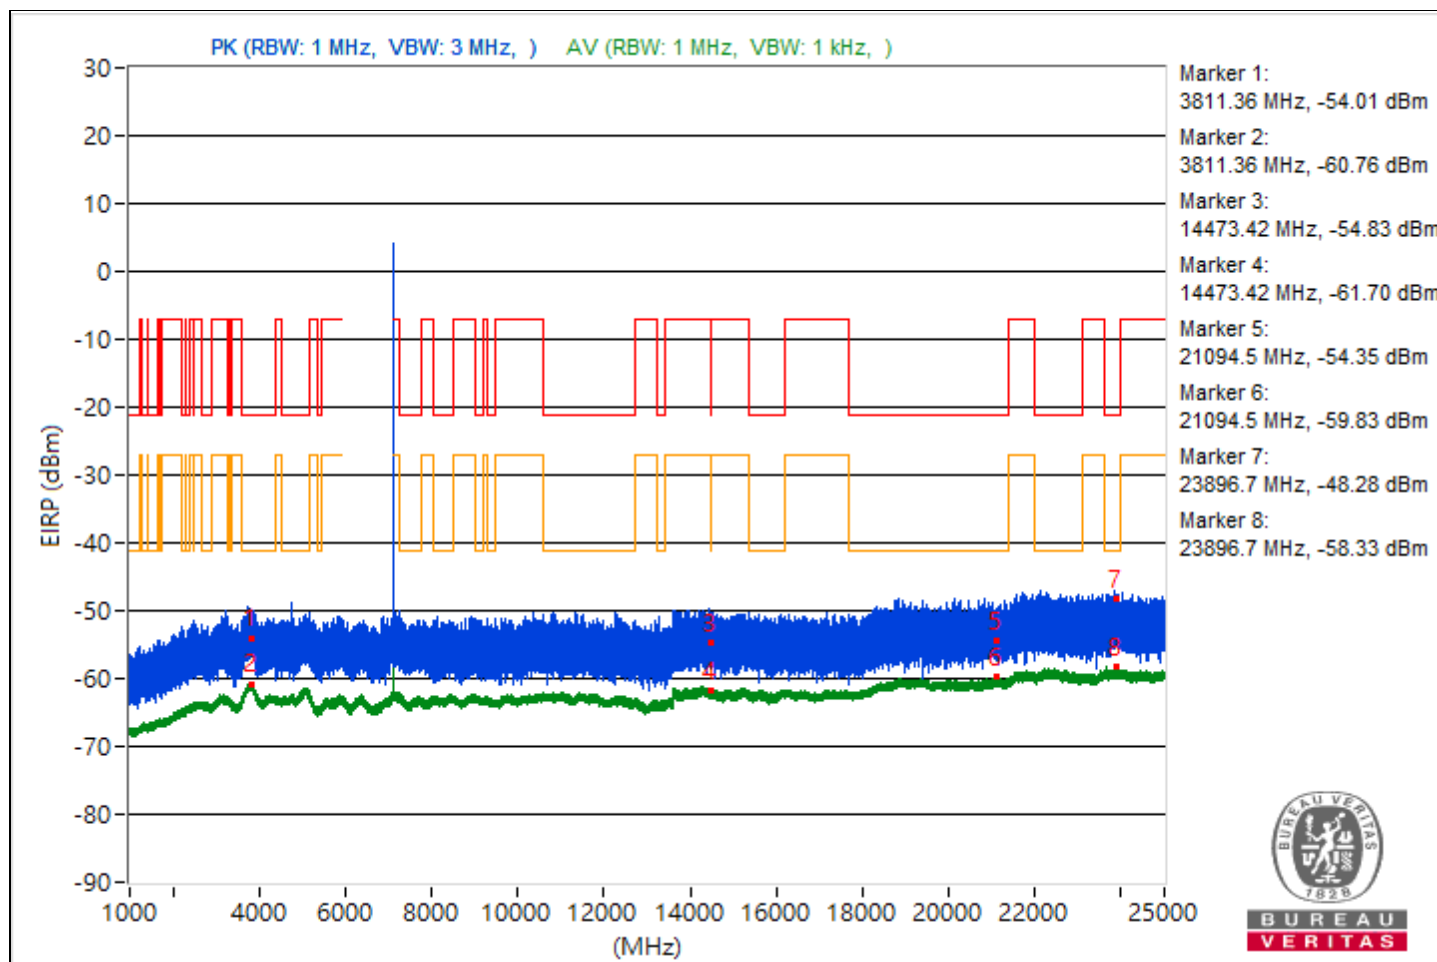


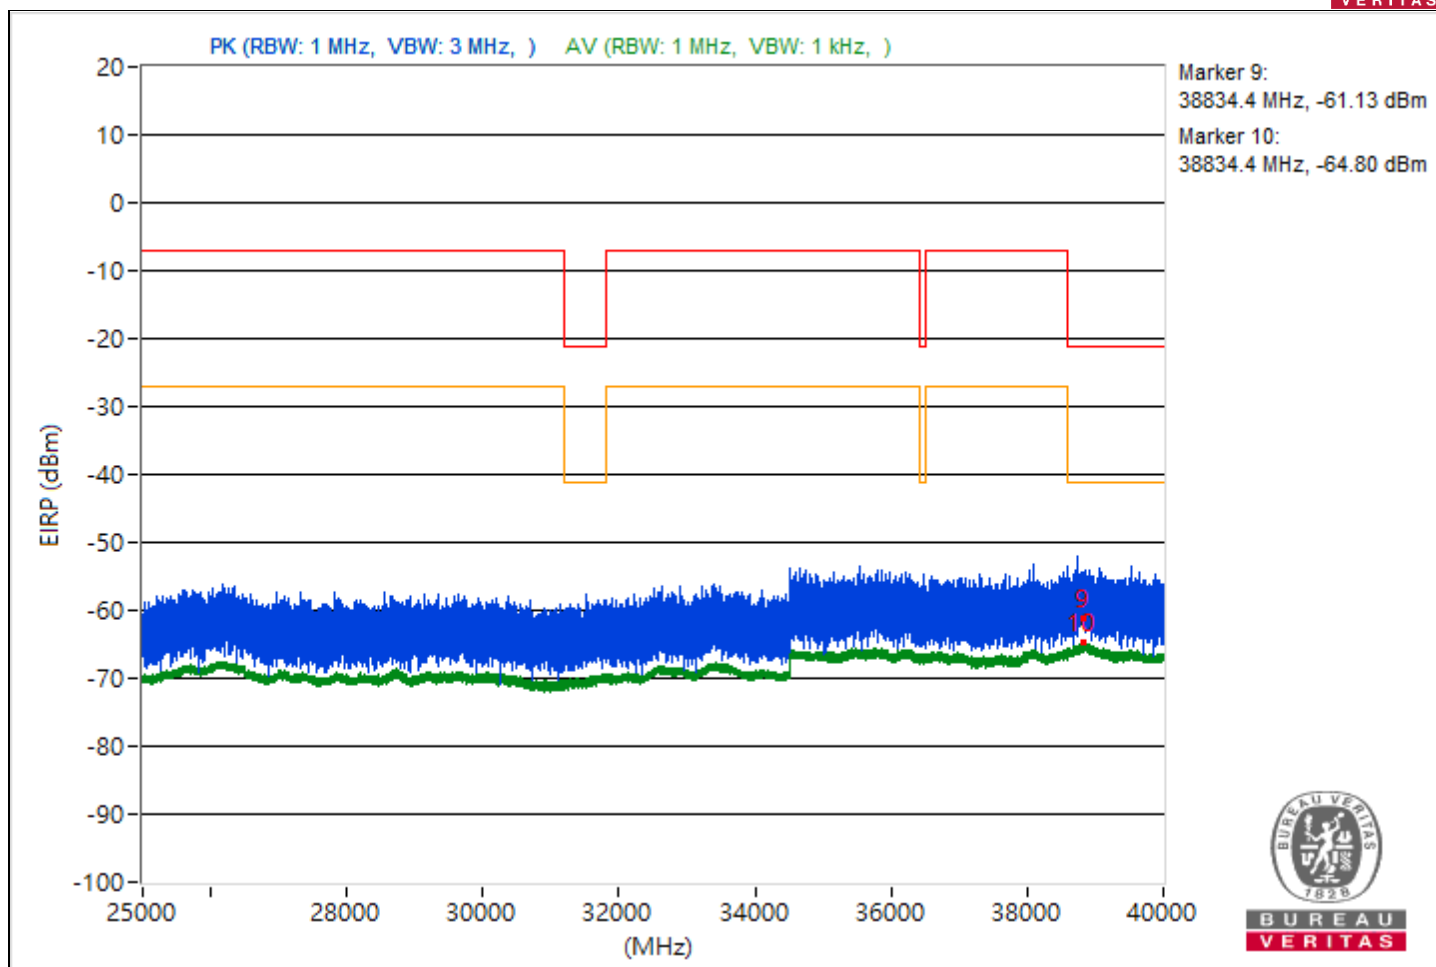


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.46	41.53 PK	74	-32.47	-58.65	4.92	-53.73
2	3820.46	34.46 AV	54	-19.54	-65.72	4.92	-60.8
3	14472.53	43.7 PK	74	-30.3	-56.48	4.92	-51.56
4	14472.53	33.48 AV	54	-20.52	-66.7	4.92	-61.78
5	21143.4	44.66 PK	74	-29.34	-55.52	4.92	-50.6
6	21143.4	35.36 AV	54	-18.64	-64.82	4.92	-59.9
7	23834.9	41.2 PK	74	-32.8	-58.98	4.92	-54.06
8	23834.9	36.74 AV	54	-17.26	-63.44	4.92	-58.52
9	38859.02	36.91 PK	74	-37.09	-63.27	4.92	-58.35
10	38859.02	30.45 AV	54	-23.55	-69.73	4.92	-64.81

Note: Margin value = Emission Level - Limit value

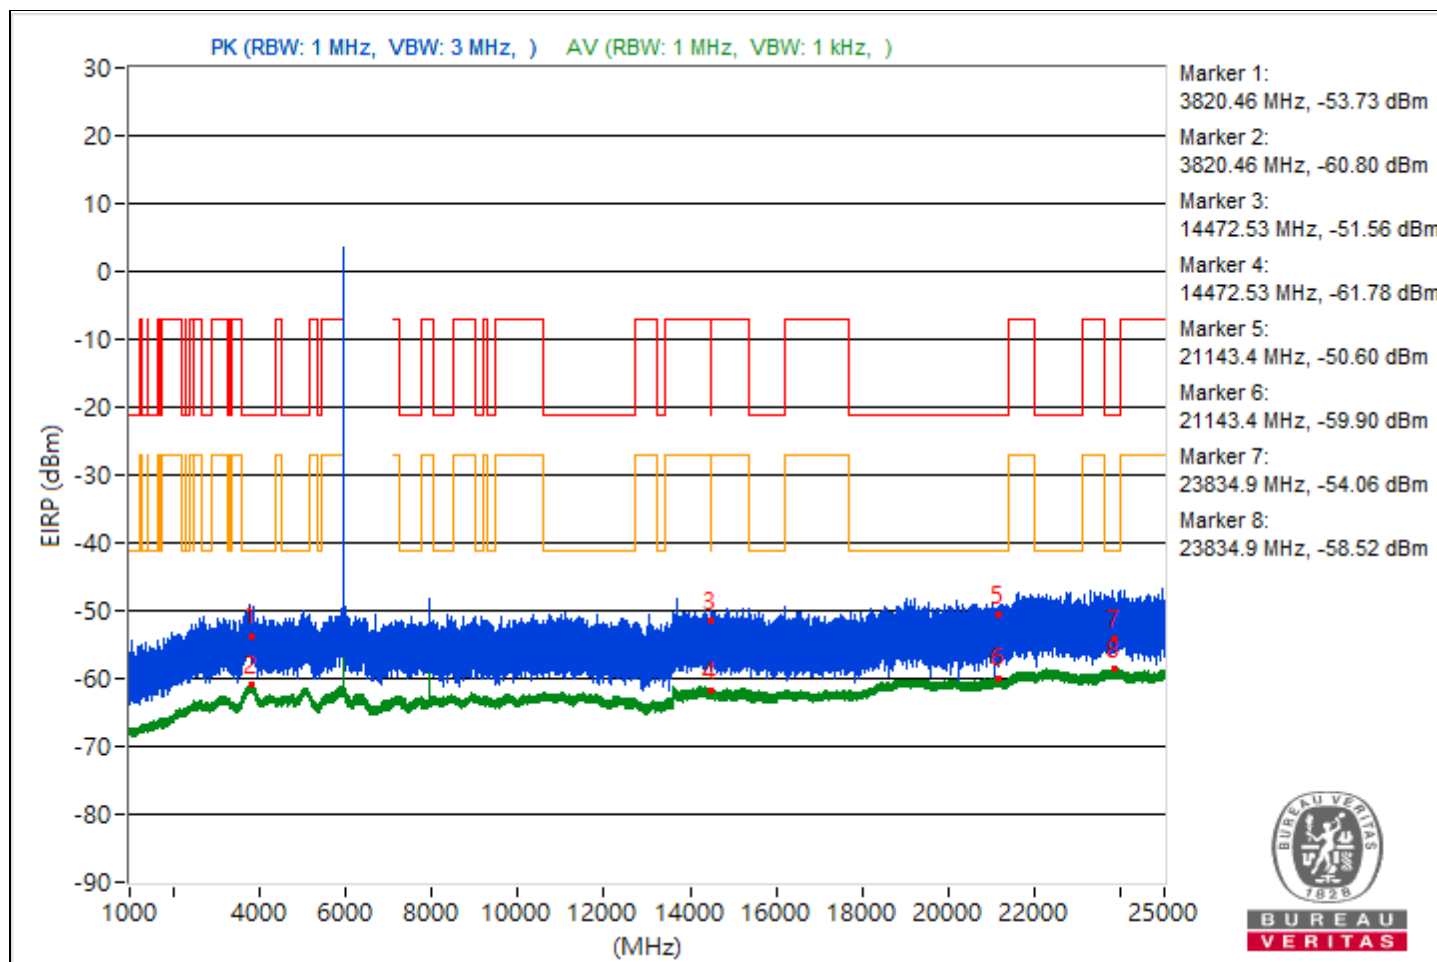


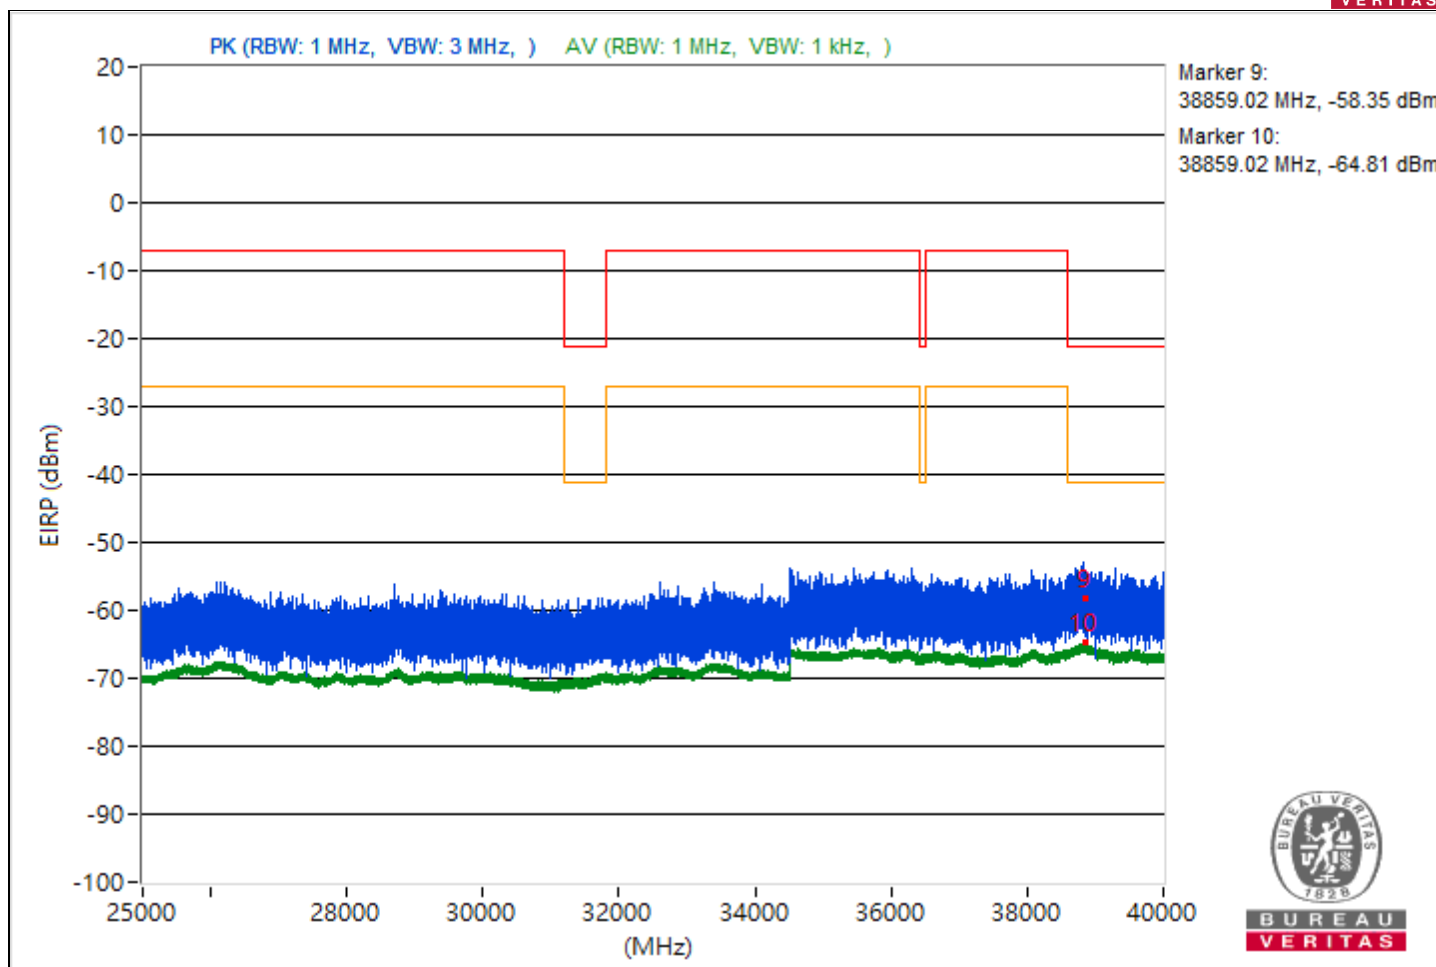


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.71	41.04 PK	74	-32.96	-59.14	4.92	-54.22
2	3801.71	34.48 AV	54	-19.52	-65.7	4.92	-60.78
3	14477.87	39.45 PK	74	-34.55	-60.73	4.92	-55.81
4	14477.87	33.69 AV	54	-20.31	-66.49	4.92	-61.57
5	21154	40.95 PK	74	-33.05	-59.23	4.92	-54.31
6	21154	35.79 AV	54	-18.21	-64.39	4.92	-59.47
7	23952.9	45.12 PK	74	-28.88	-55.06	4.92	-50.14
8	23952.9	36.76 AV	54	-17.24	-63.42	4.92	-58.5
9	38843.38	36.9 PK	74	-37.1	-63.28	4.92	-58.36
10	38843.38	30.43 AV	54	-23.57	-69.75	4.92	-64.83

Note: Margin value = Emission Level - Limit value

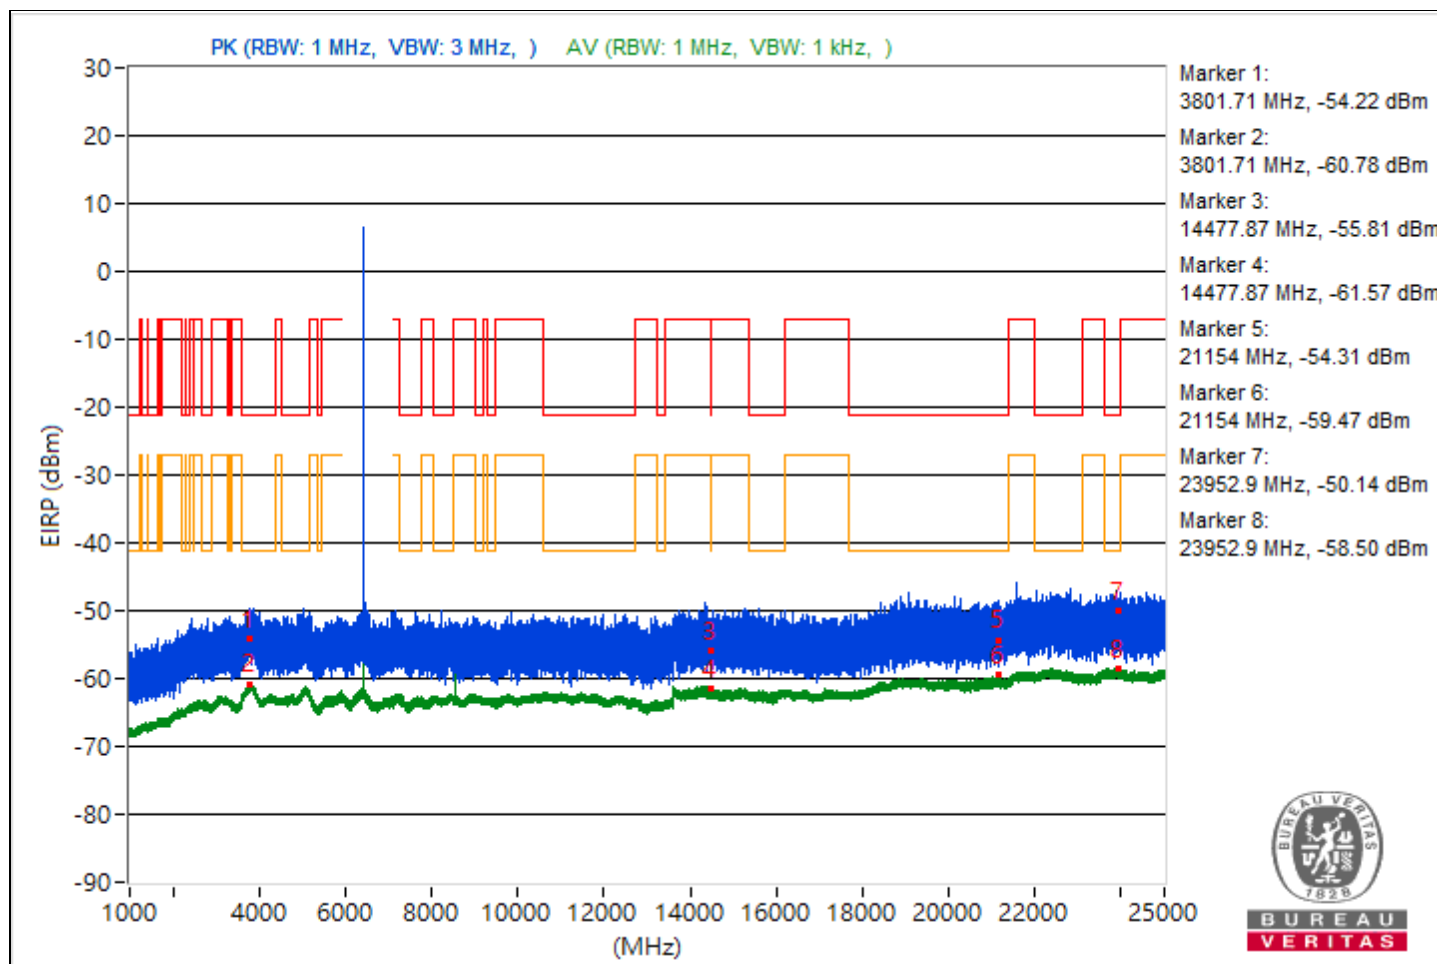


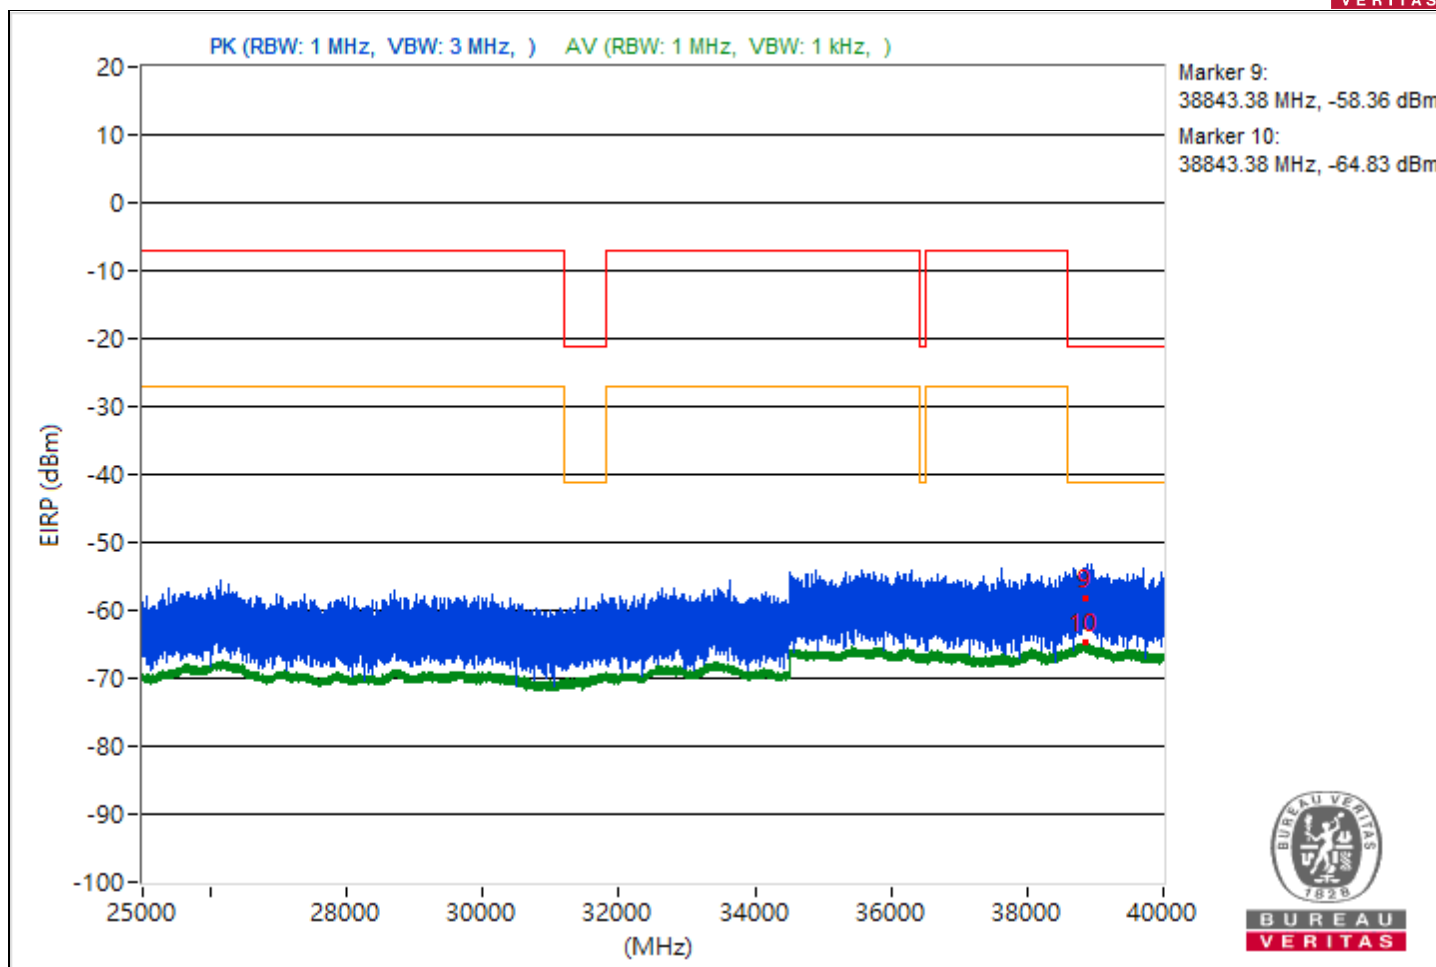


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.13	42.12 PK	74	-31.88	-58.06	4.92	-53.14
2	3812.13	34.4 AV	54	-19.6	-65.78	4.92	-60.86
3	14493.33	40.28 PK	74	-33.72	-59.9	4.92	-54.98
4	14493.33	33.52 AV	54	-20.48	-66.66	4.92	-61.74
5	21050	42.91 PK	74	-31.09	-57.27	4.92	-52.35
6	21050	35.42 AV	54	-18.58	-64.76	4.92	-59.84
7	22256.4	40.92 PK	74	-33.08	-59.26	4.92	-54.34
8	22256.4	36.79 AV	54	-17.21	-63.39	4.92	-58.47
9	38840.53	35.53 PK	74	-38.47	-64.65	4.92	-59.73
10	38840.53	30.39 AV	54	-23.61	-69.79	4.92	-64.87

Note: Margin value = Emission Level - Limit value

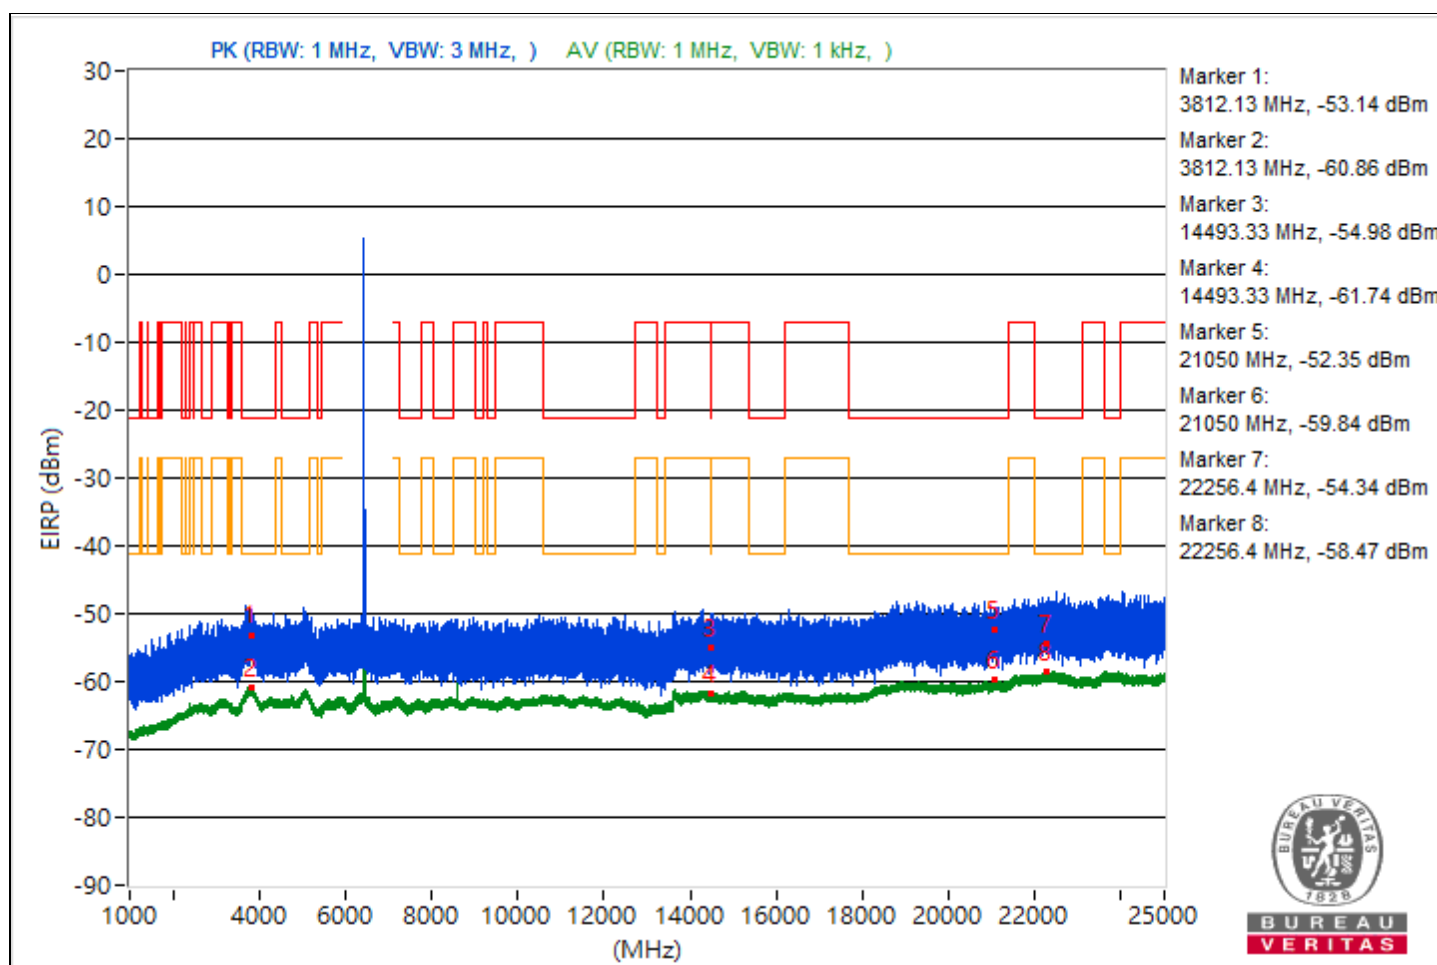


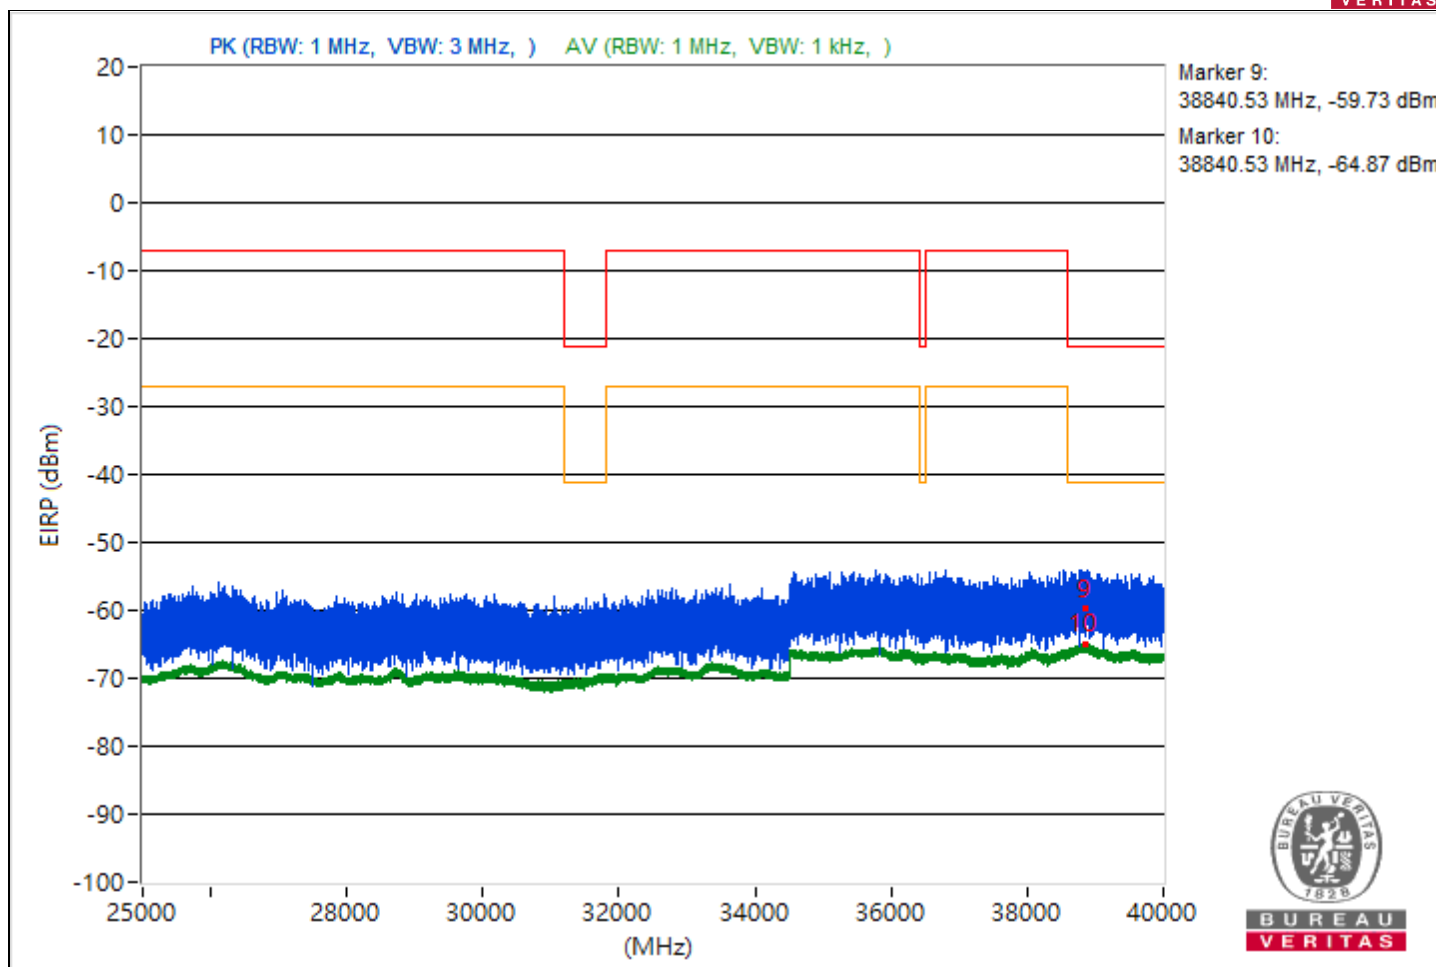


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.32	40.68 PK	74	-33.32	-59.5	4.92	-54.58
2	3801.32	34.46 AV	54	-19.54	-65.72	4.92	-60.8
3	14470.67	40.5 PK	74	-33.5	-59.68	4.92	-54.76
4	14470.67	33.59 AV	54	-20.41	-66.59	4.92	-61.67
5	21151.3	42.43 PK	74	-31.57	-57.75	4.92	-52.83
6	21151.3	35.35 AV	54	-18.65	-64.83	4.92	-59.91
7	23626.3	46.66 PK	74	-27.34	-53.52	4.92	-48.6
8	23626.3	36.72 AV	54	-17.28	-63.46	4.92	-58.54
9	38835.73	39.04 PK	74	-34.96	-61.14	4.92	-56.22
10	38835.73	30.48 AV	54	-23.52	-69.7	4.92	-64.78

Note: Margin value = Emission Level - Limit value

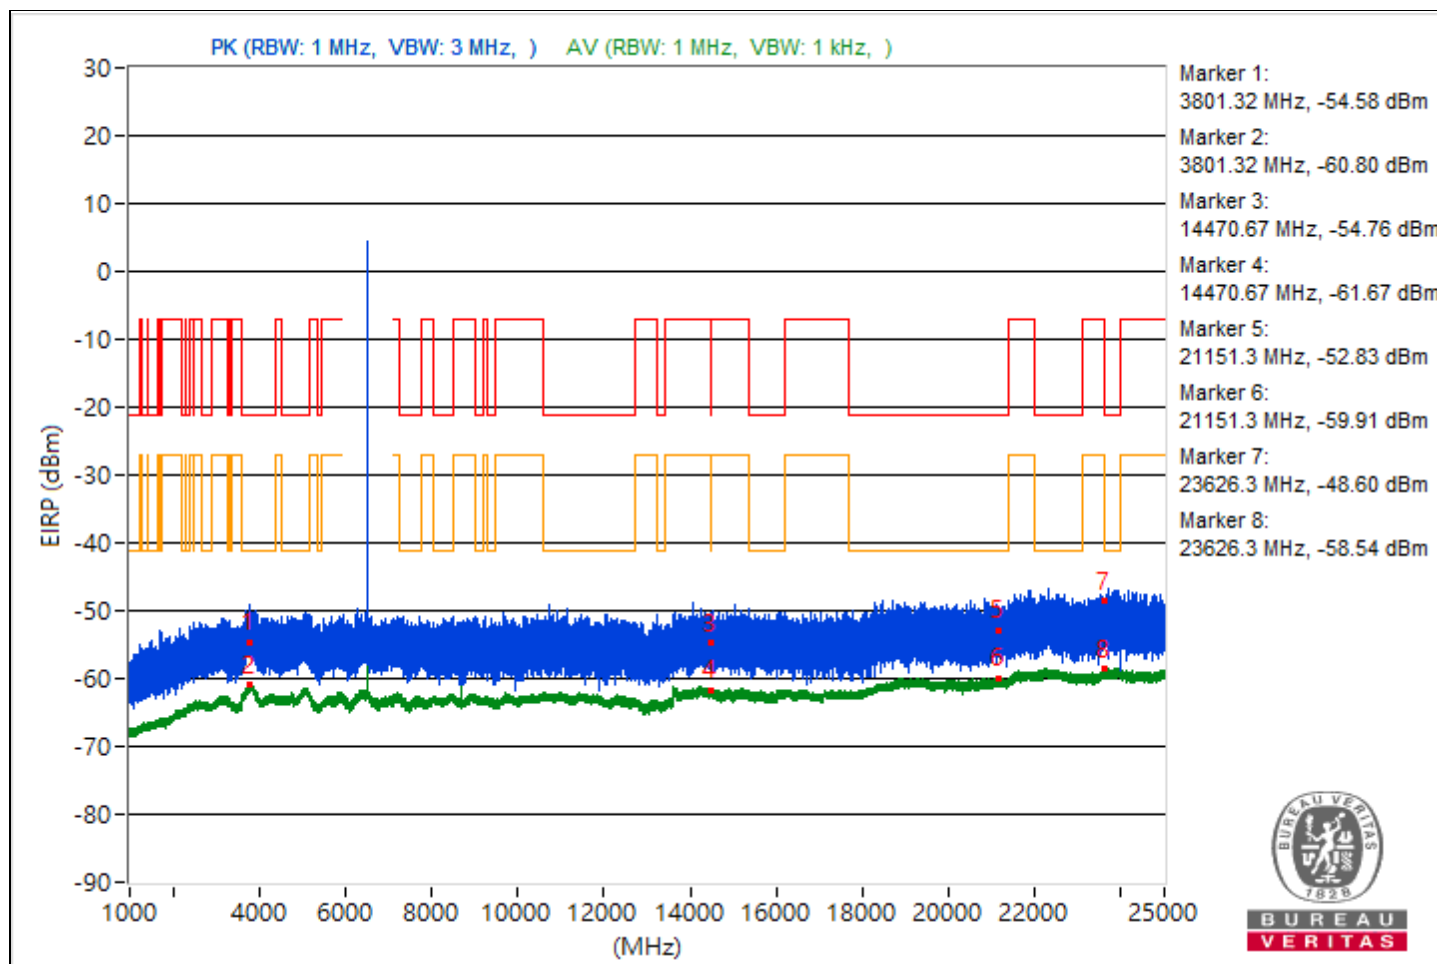


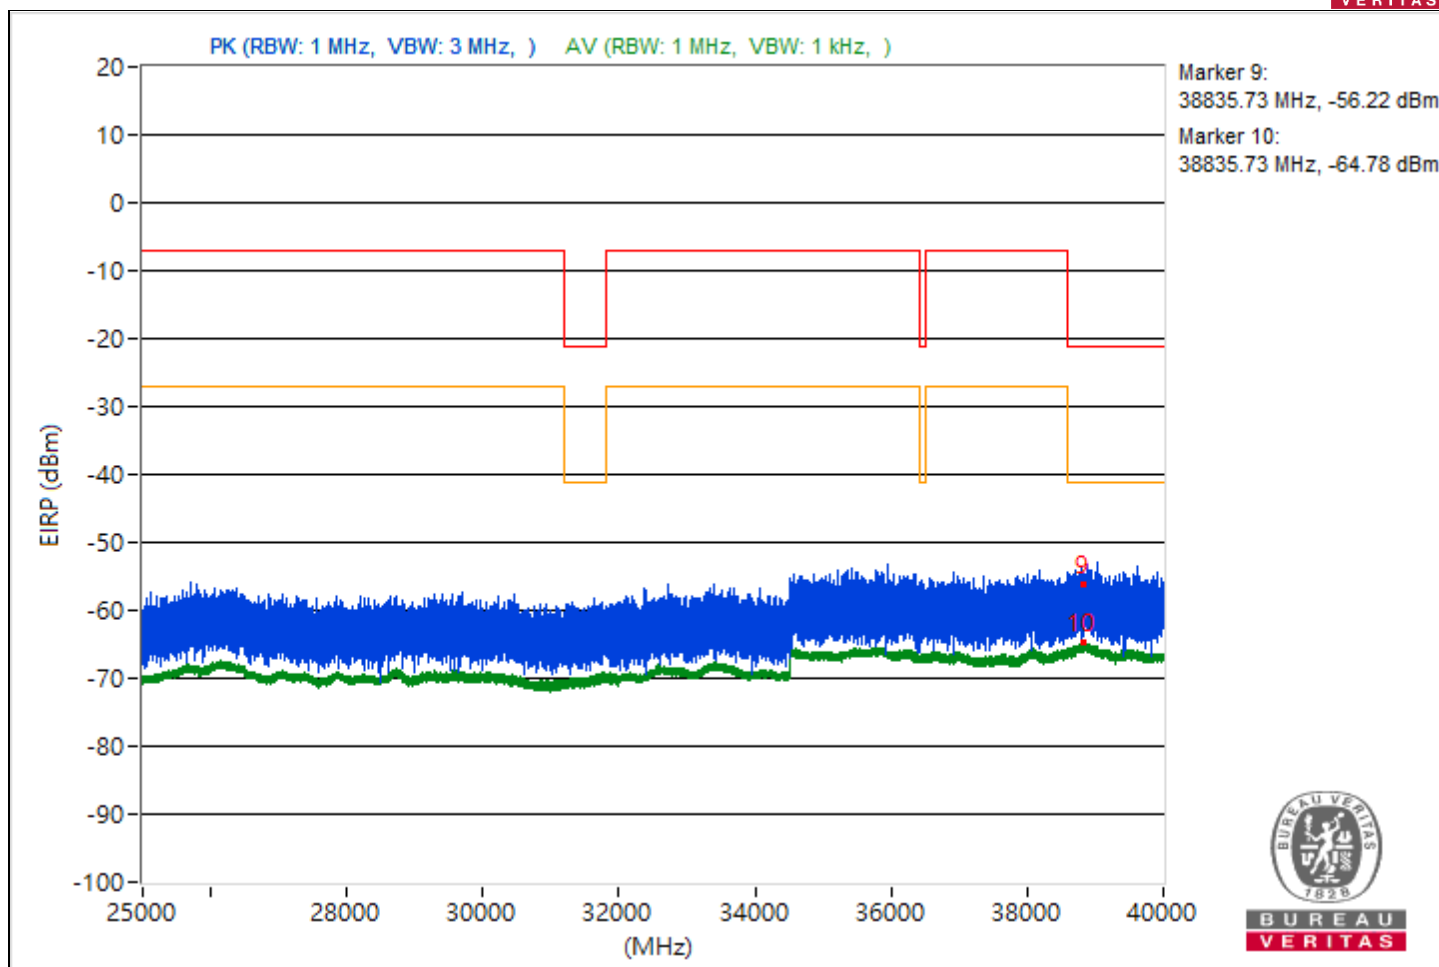


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.28	40.35 PK	74	-33.65	-59.83	4.92	-54.91
2	3811.28	34.53 AV	54	-19.47	-65.65	4.92	-60.73
3	14482.67	40.43 PK	74	-33.57	-59.75	4.92	-54.83
4	14482.67	33.49 AV	54	-20.51	-66.69	4.92	-61.77
5	21167.8	44.33 PK	74	-29.67	-55.85	4.92	-50.93
6	21167.8	35.36 AV	54	-18.64	-64.82	4.92	-59.9
7	22259	41.44 PK	74	-32.56	-58.74	4.92	-53.82
8	22259	36.77 AV	54	-17.23	-63.41	4.92	-58.49
9	38851.02	36.61 PK	74	-37.39	-63.57	4.92	-58.65
10	38851.02	30.47 AV	54	-23.53	-69.71	4.92	-64.79

Note: Margin value = Emission Level - Limit value

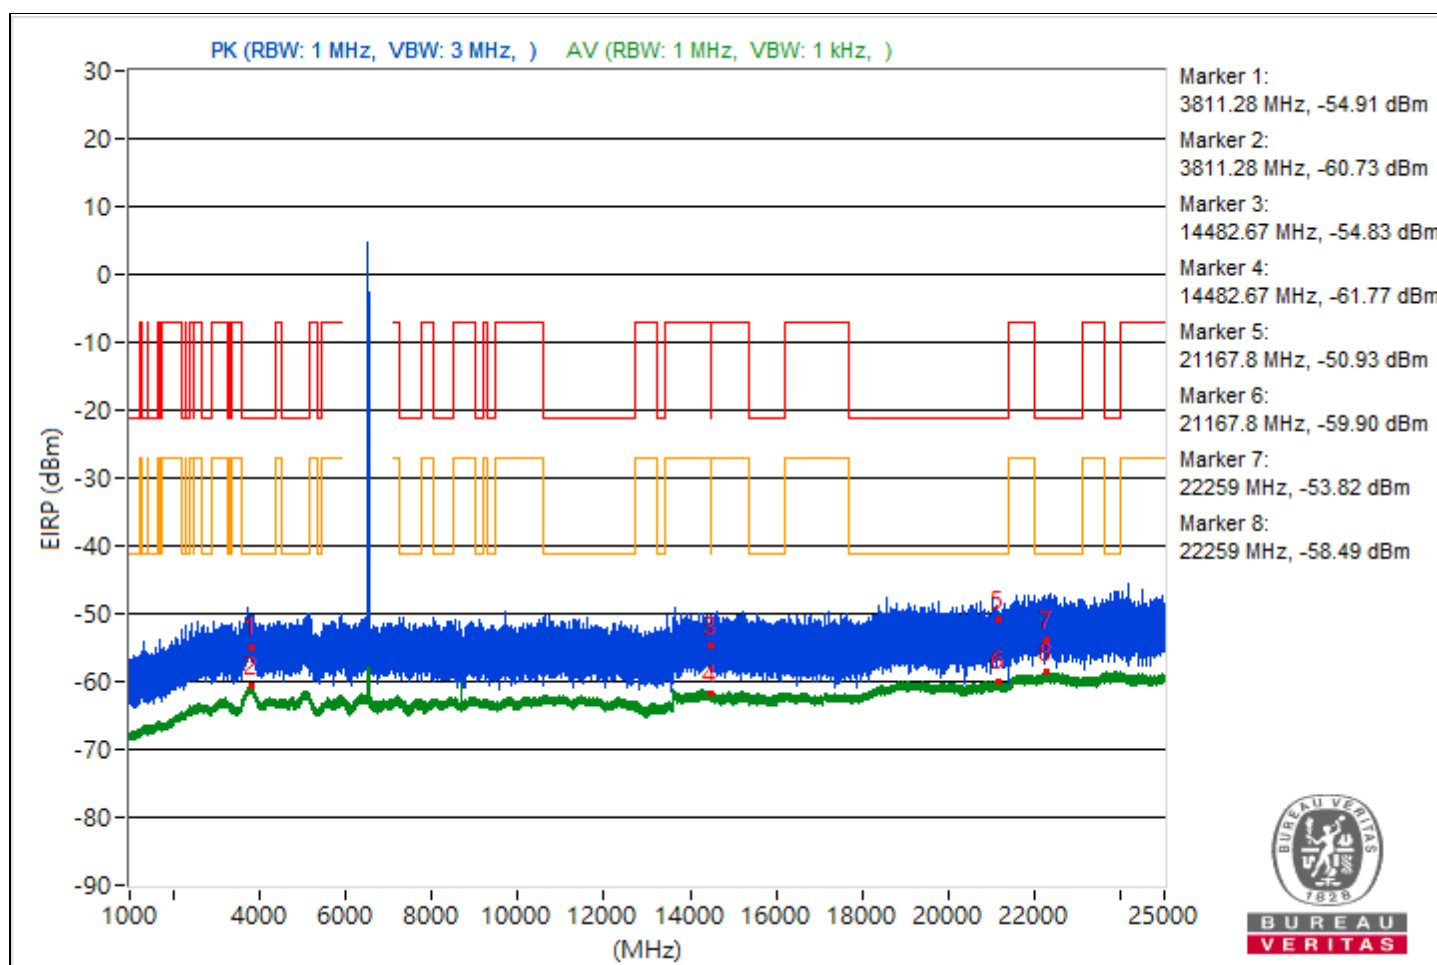


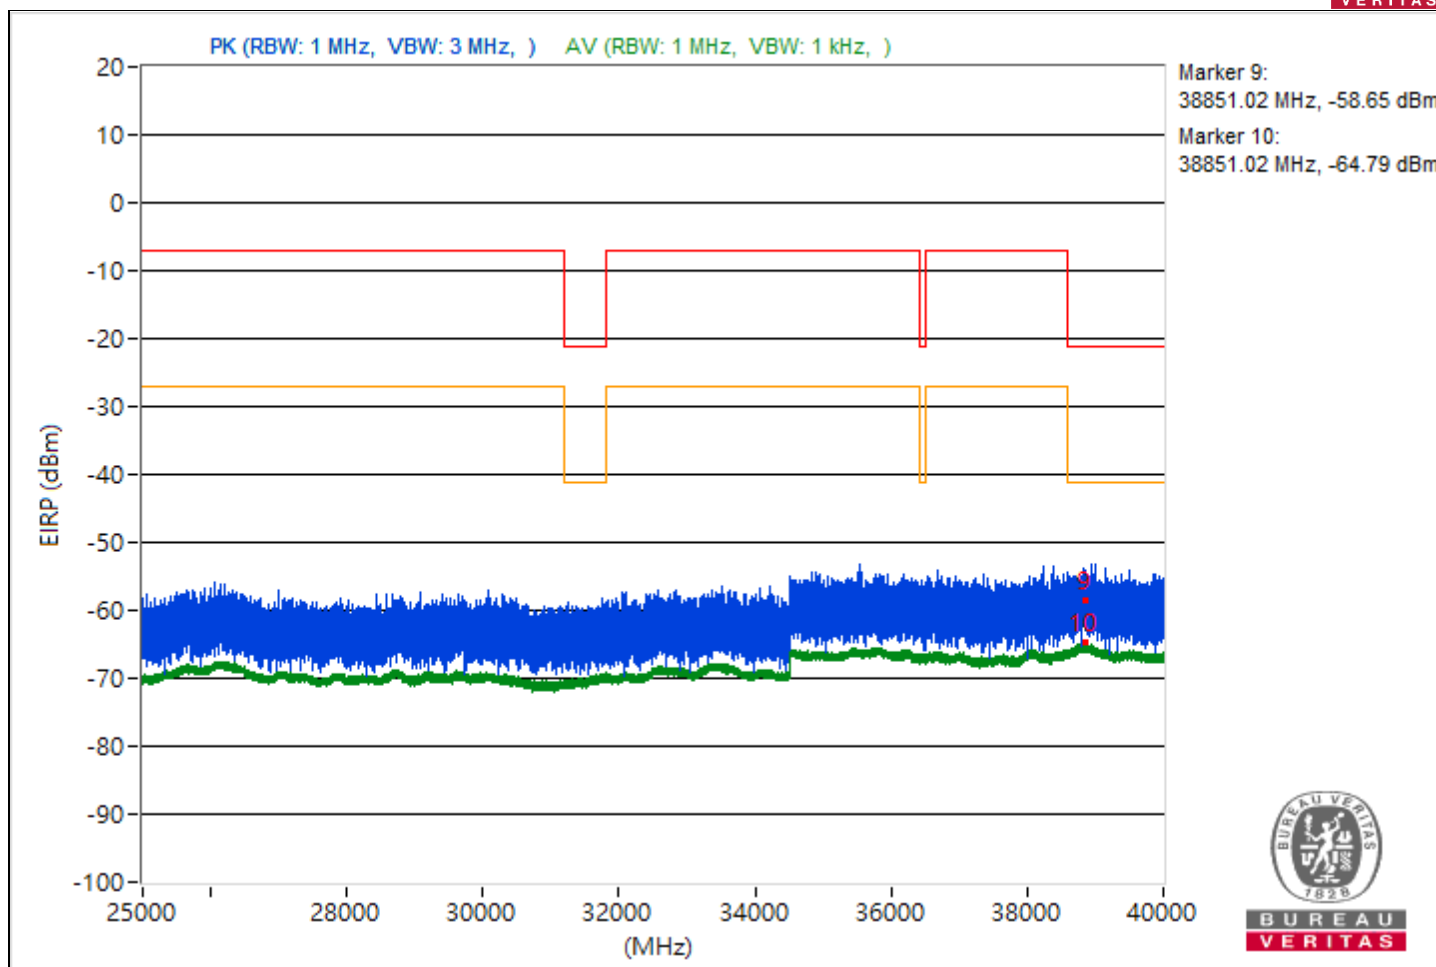


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.37	42.96 PK	74	-31.04	-57.22	4.92	-52.3
2	3777.37	34.54 AV	54	-19.46	-65.64	4.92	-60.72
3	14471.91	40.65 PK	74	-33.35	-59.53	4.92	-54.61
4	14471.91	33.58 AV	54	-20.42	-66.6	4.92	-61.68
5	21156.5	39.4 PK	74	-34.6	-60.78	4.92	-55.86
6	21156.5	35.44 AV	54	-18.56	-64.74	4.92	-59.82
7	23635.6	43.87 PK	74	-30.13	-56.31	4.92	-51.39
8	23635.6	36.85 AV	54	-17.15	-63.33	4.92	-58.41
9	38816.27	37.32 PK	74	-36.68	-62.86	4.92	-57.94
10	38816.27	30.6 AV	54	-23.4	-69.58	4.92	-64.66

Note: Margin value = Emission Level - Limit value

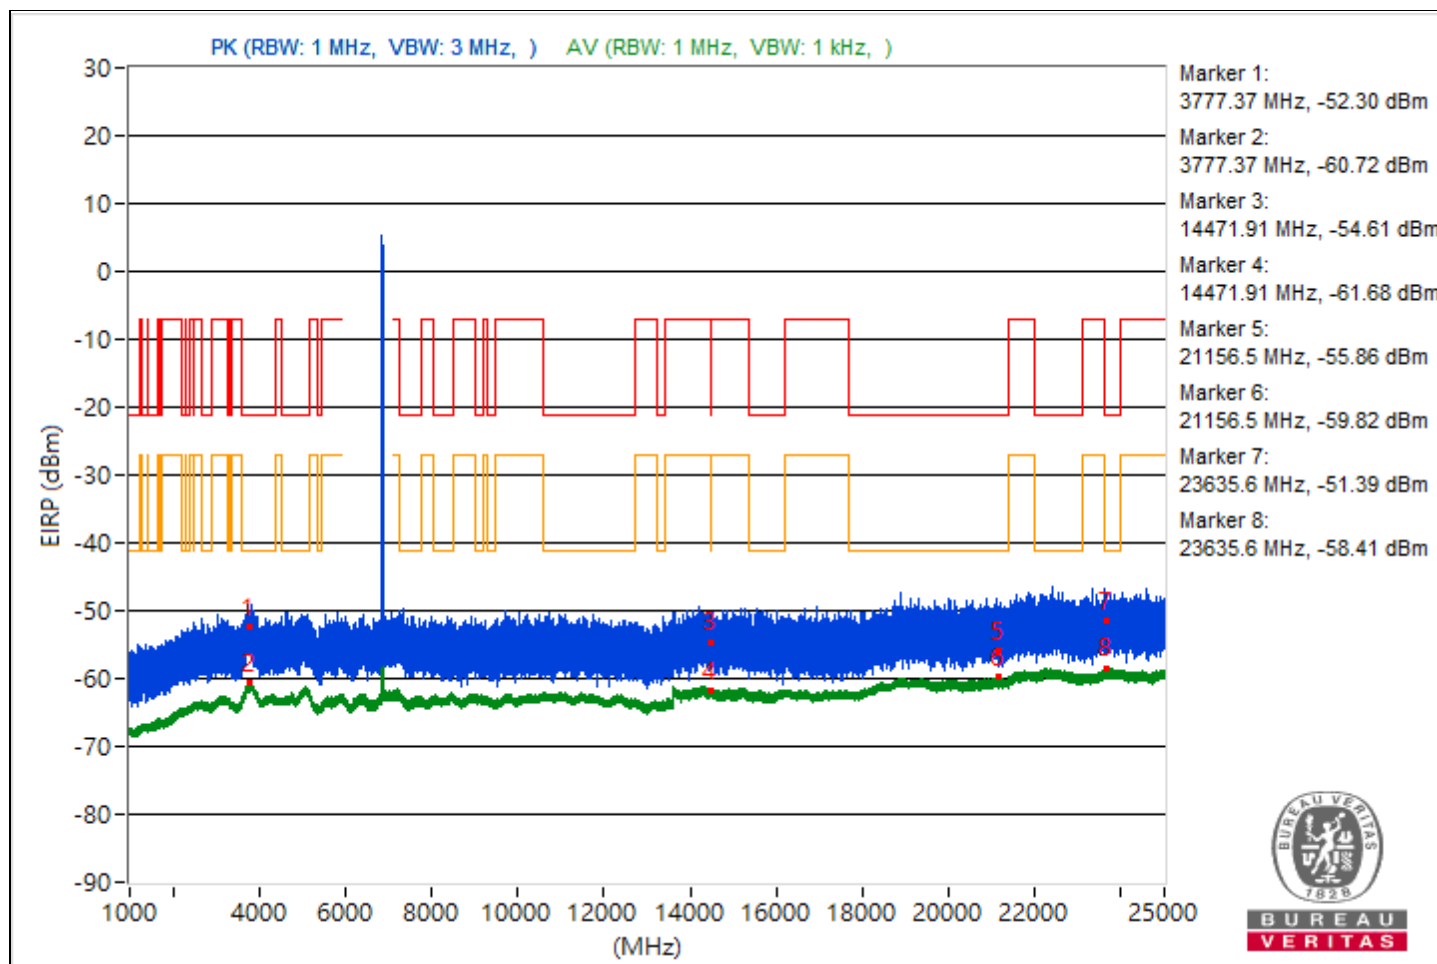


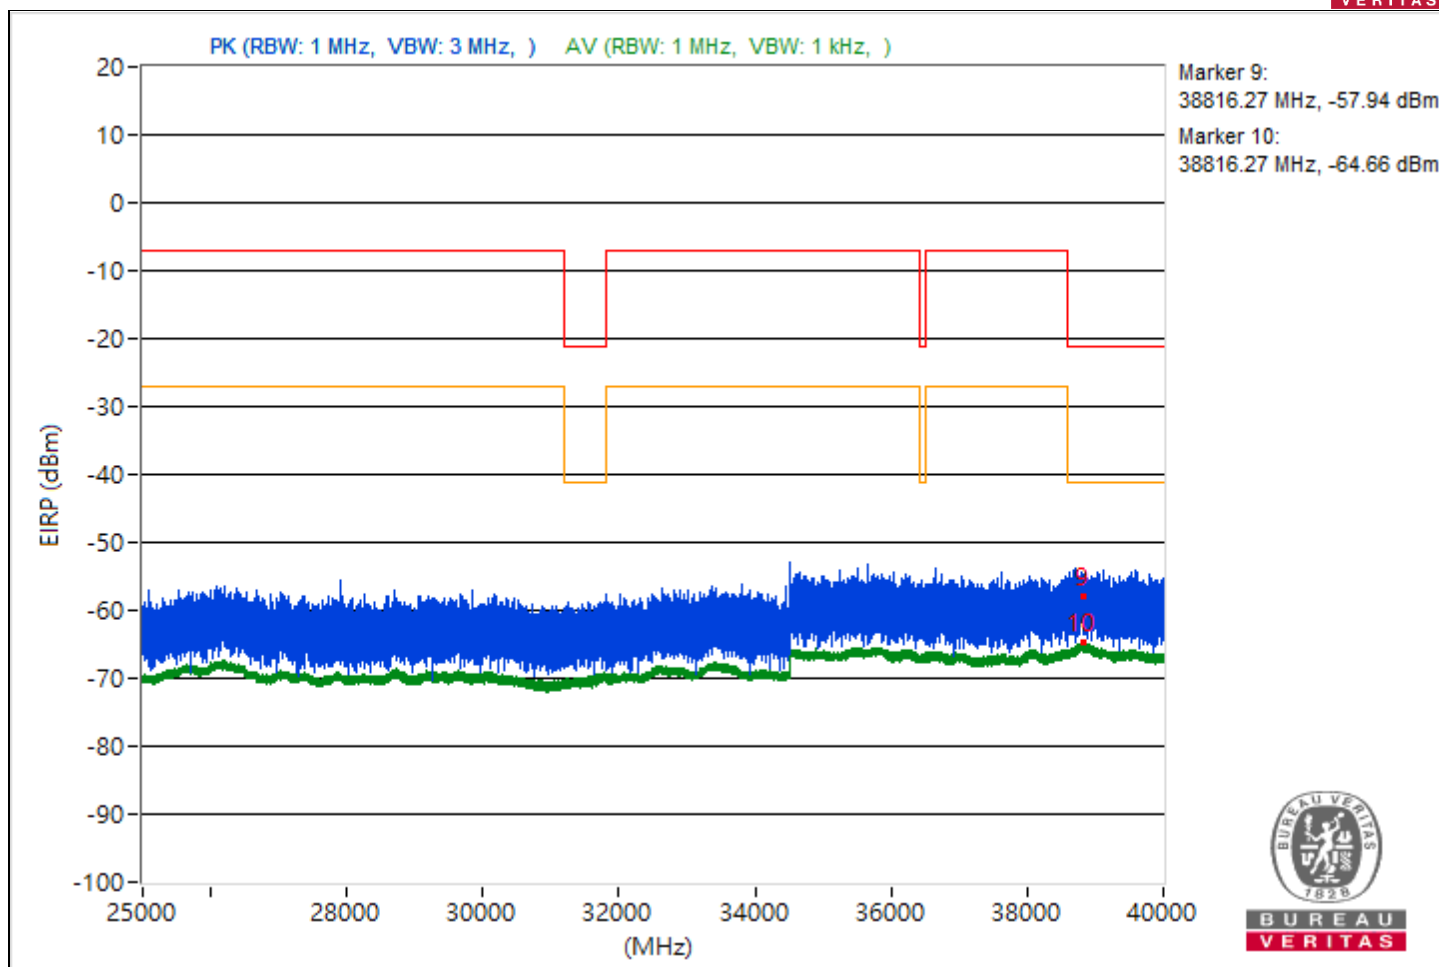


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3822.17	40.62 PK	74	-33.38	-59.56	4.92	-54.64
2	3822.17	34.53 AV	54	-19.47	-65.65	4.92	-60.73
3	14482.49	40.42 PK	74	-33.58	-59.76	4.92	-54.84
4	14482.49	33.73 AV	54	-20.27	-66.45	4.92	-61.53
5	21180.8	43.02 PK	74	-30.98	-57.16	4.92	-52.24
6	21180.8	35.37 AV	54	-18.63	-64.81	4.92	-59.89
7	23742.8	44.34 PK	74	-29.66	-55.84	4.92	-50.92
8	23742.8	36.69 AV	54	-17.31	-63.49	4.92	-58.57
9	38830.13	37.65 PK	74	-36.35	-62.53	4.92	-57.61
10	38830.13	30.51 AV	54	-23.49	-69.67	4.92	-64.75

Note: Margin value = Emission Level - Limit value

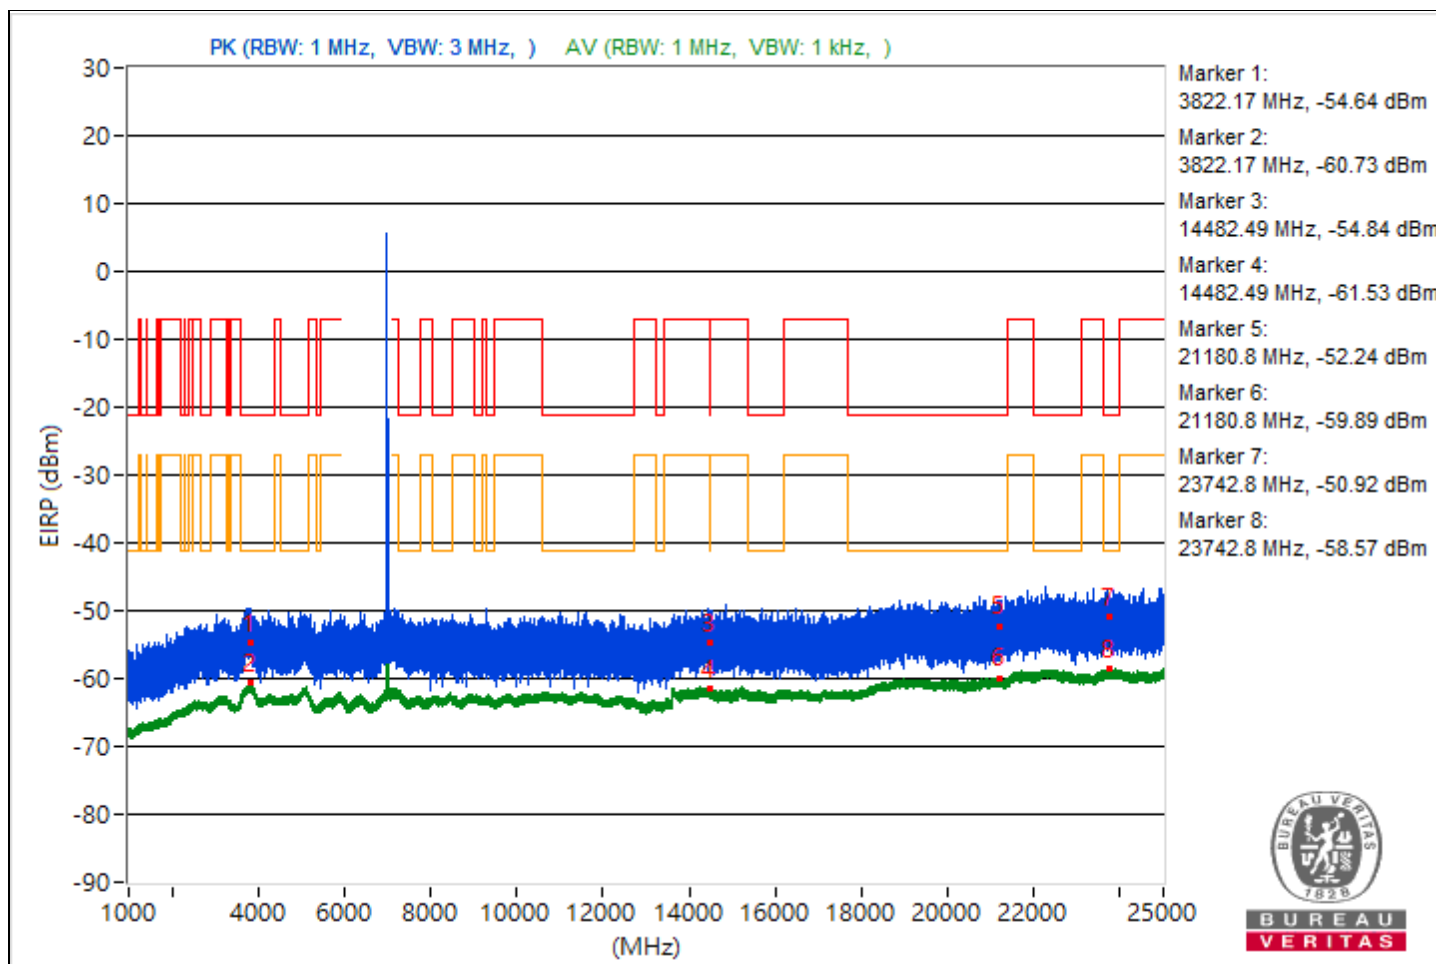


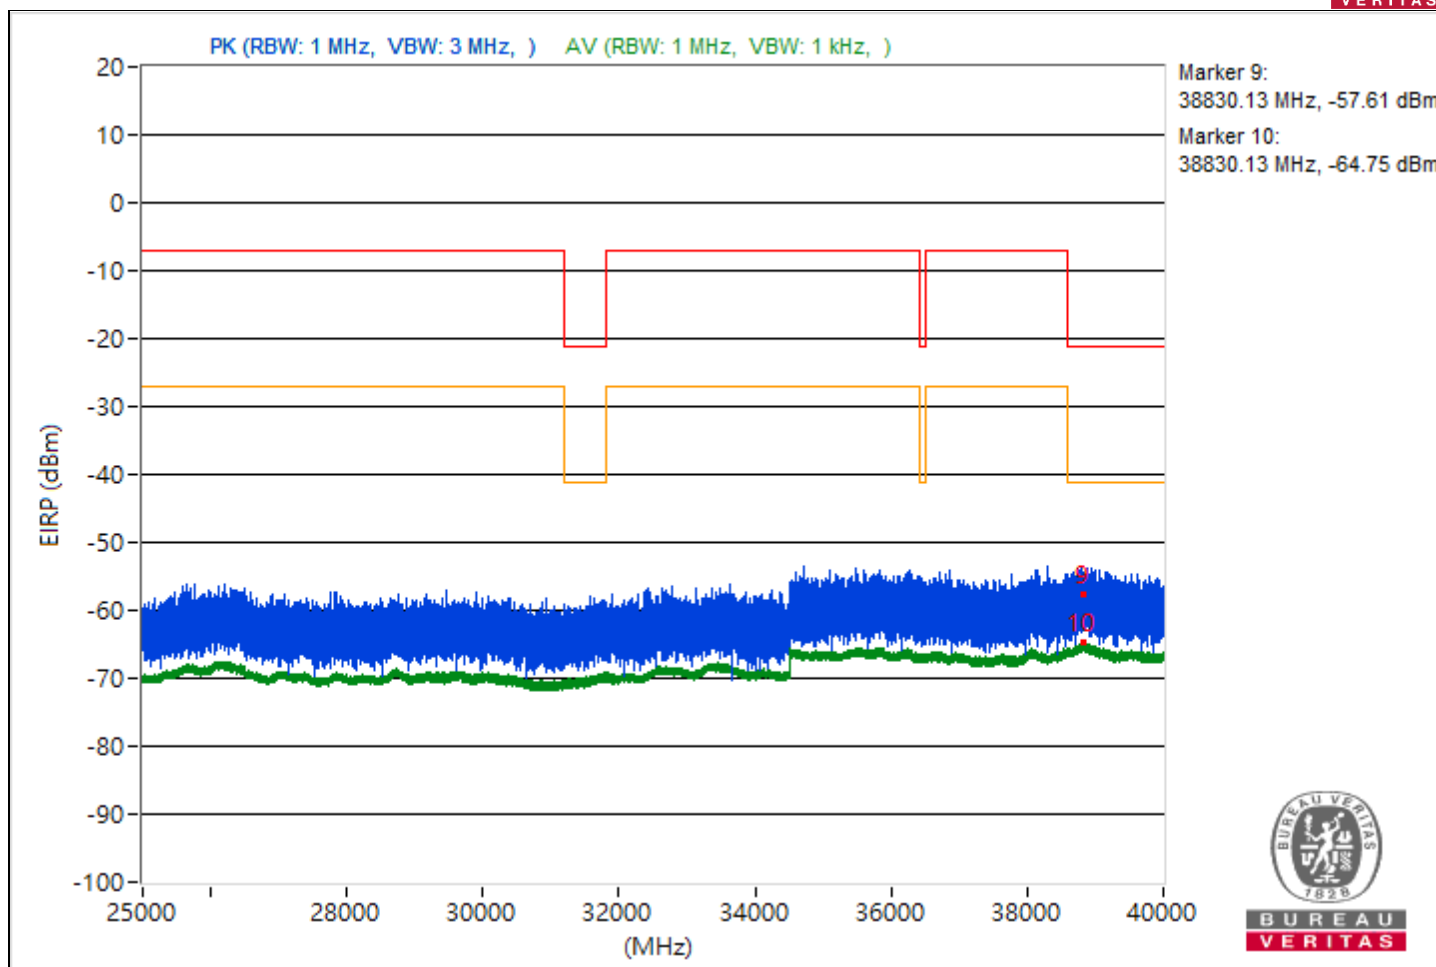


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.42	44.79 PK	74	-29.21	-55.39	4.92	-50.47
2	3803.42	34.66 AV	54	-19.34	-65.52	4.92	-60.6
3	7256.29	39.81 PK	74	-34.19	-60.37	4.92	-55.45
4	7256.29	34.29 AV	54	-19.71	-65.89	4.92	-60.97
5	21254.6	43.48 PK	74	-30.52	-56.7	4.92	-51.78
6	21254.6	35.42 AV	54	-18.58	-64.76	4.92	-59.84
7	22282.5	43.41 PK	74	-30.59	-56.77	4.92	-51.85
8	22282.5	36.85 AV	54	-17.15	-63.33	4.92	-58.41
9	38850.13	36.55 PK	74	-37.45	-63.63	4.92	-58.71
10	38850.13	30.5 AV	54	-23.5	-69.68	4.92	-64.76

Note: Margin value = Emission Level - Limit value

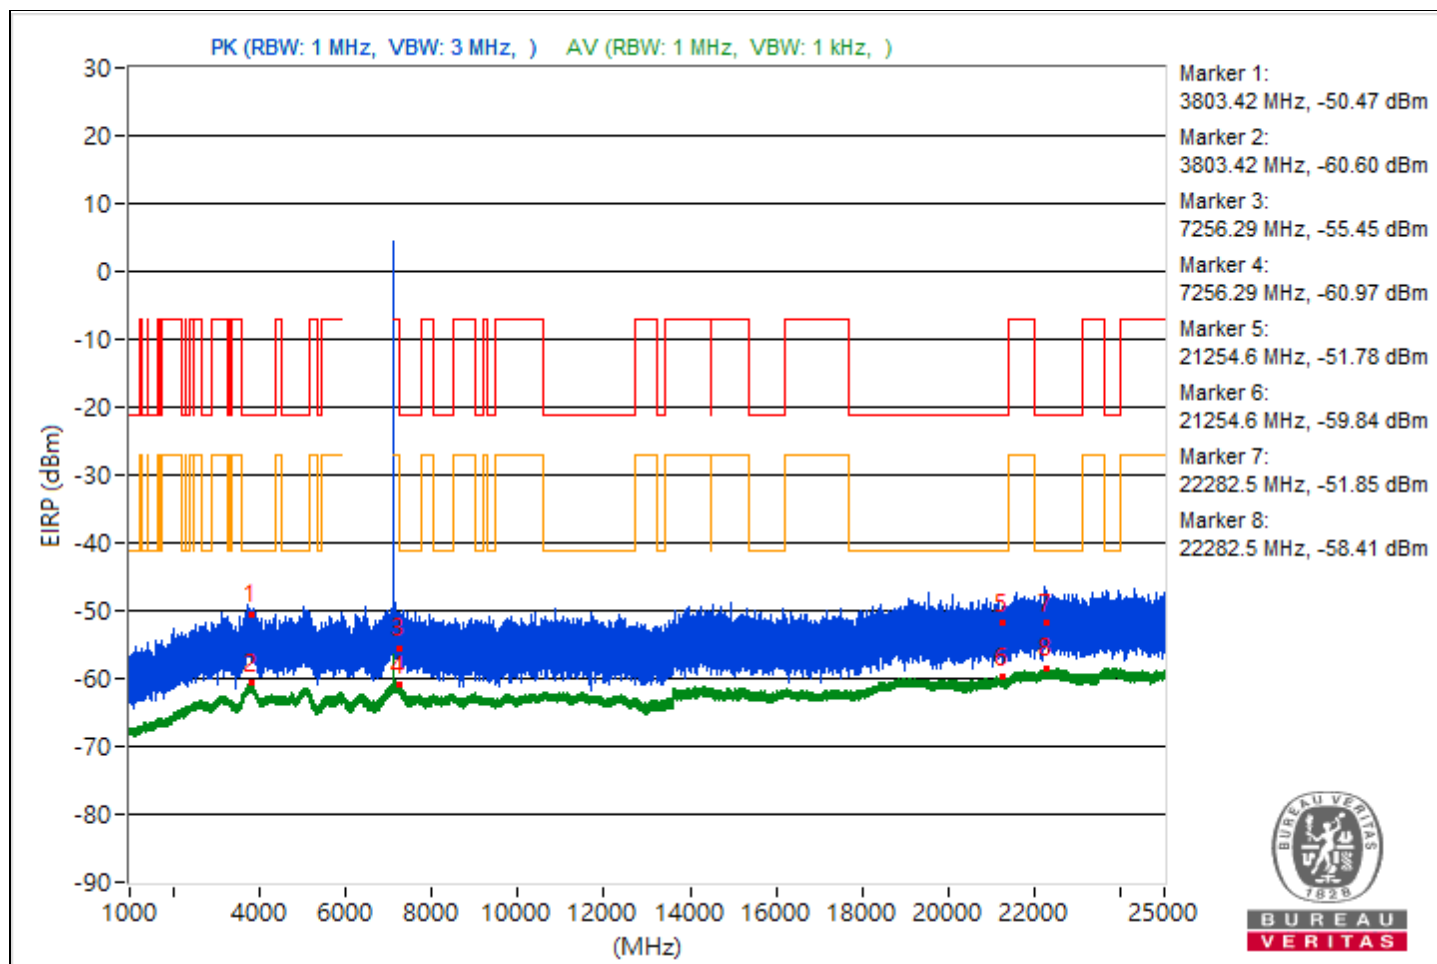


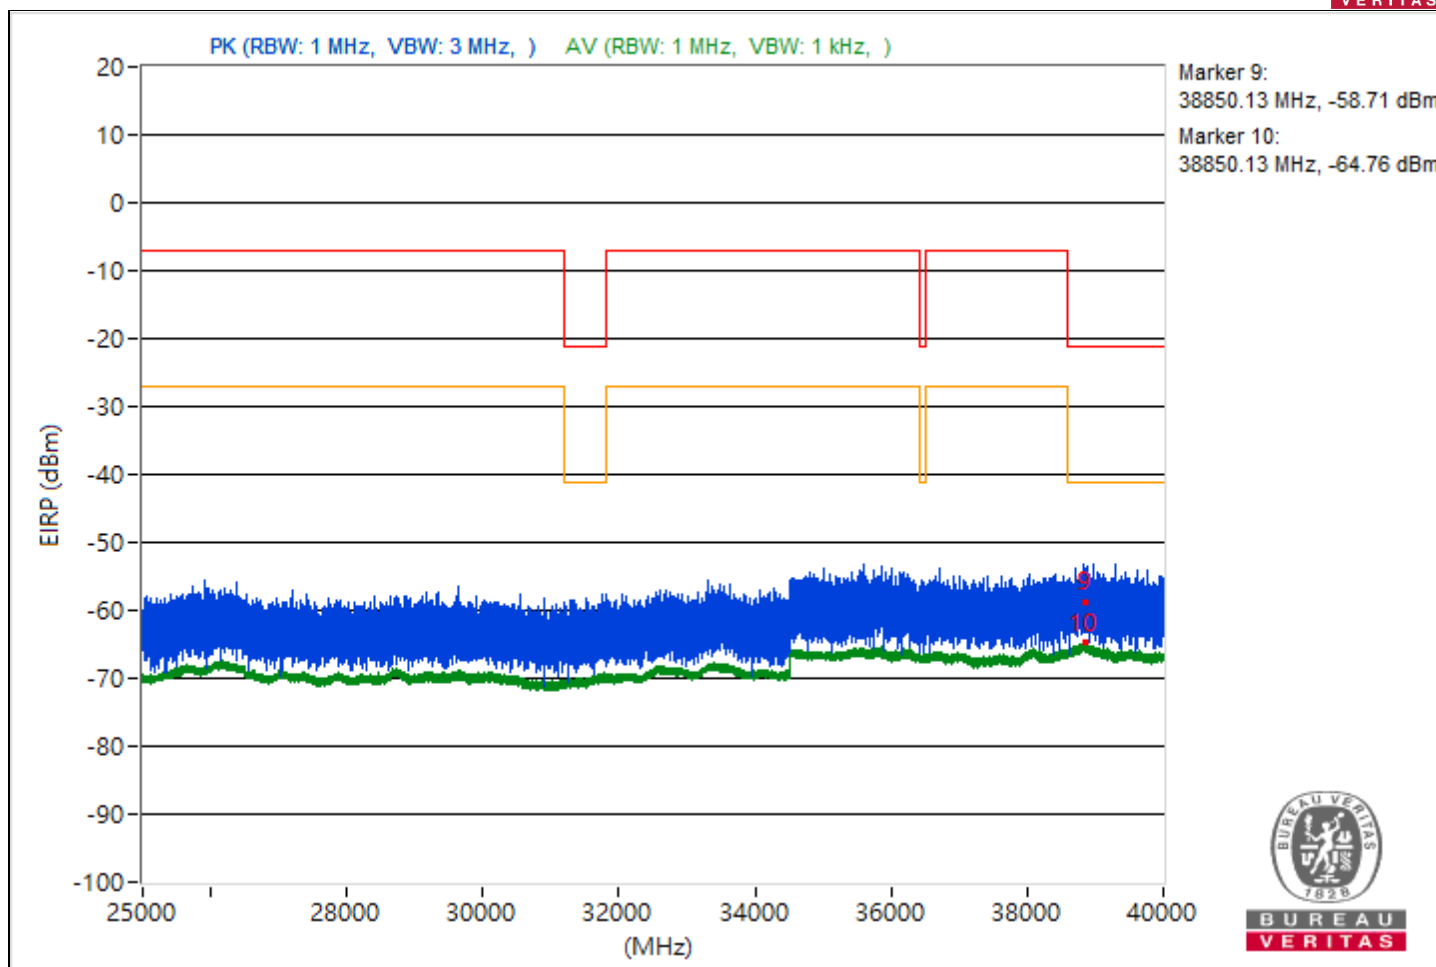


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3795.1	41.22 PK	74	-32.78	-58.96	4.92	-54.04
2	3795.1	34.69 AV	54	-19.31	-65.49	4.92	-60.57
3	14495.02	41.04 PK	74	-32.96	-59.14	4.92	-54.22
4	14495.02	33.58 AV	54	-20.42	-66.6	4.92	-61.68
5	21129.4	42.04 PK	74	-31.96	-58.14	4.92	-53.22
6	21129.4	35.56 AV	54	-18.44	-64.62	4.92	-59.7
7	23793.7	43.01 PK	74	-30.99	-57.17	4.92	-52.25
8	23793.7	36.88 AV	54	-17.12	-63.3	4.92	-58.38
9	38797.69	35.34 PK	74	-38.66	-64.84	4.92	-59.92
10	38797.69	30.28 AV	54	-23.72	-69.9	4.92	-64.98

Note: Margin value = Emission Level - Limit value

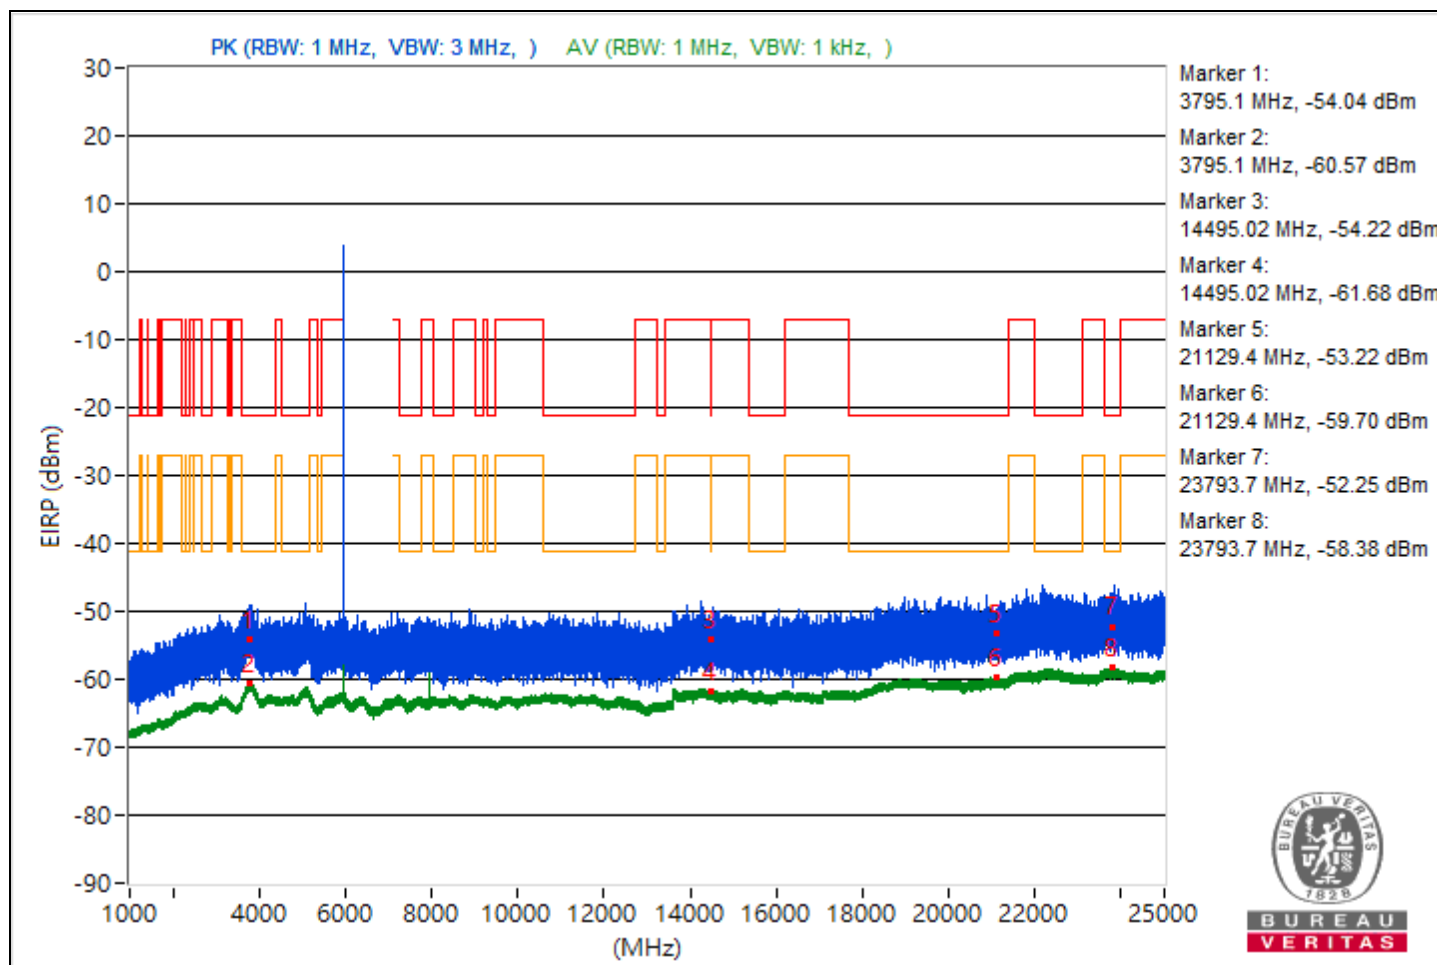


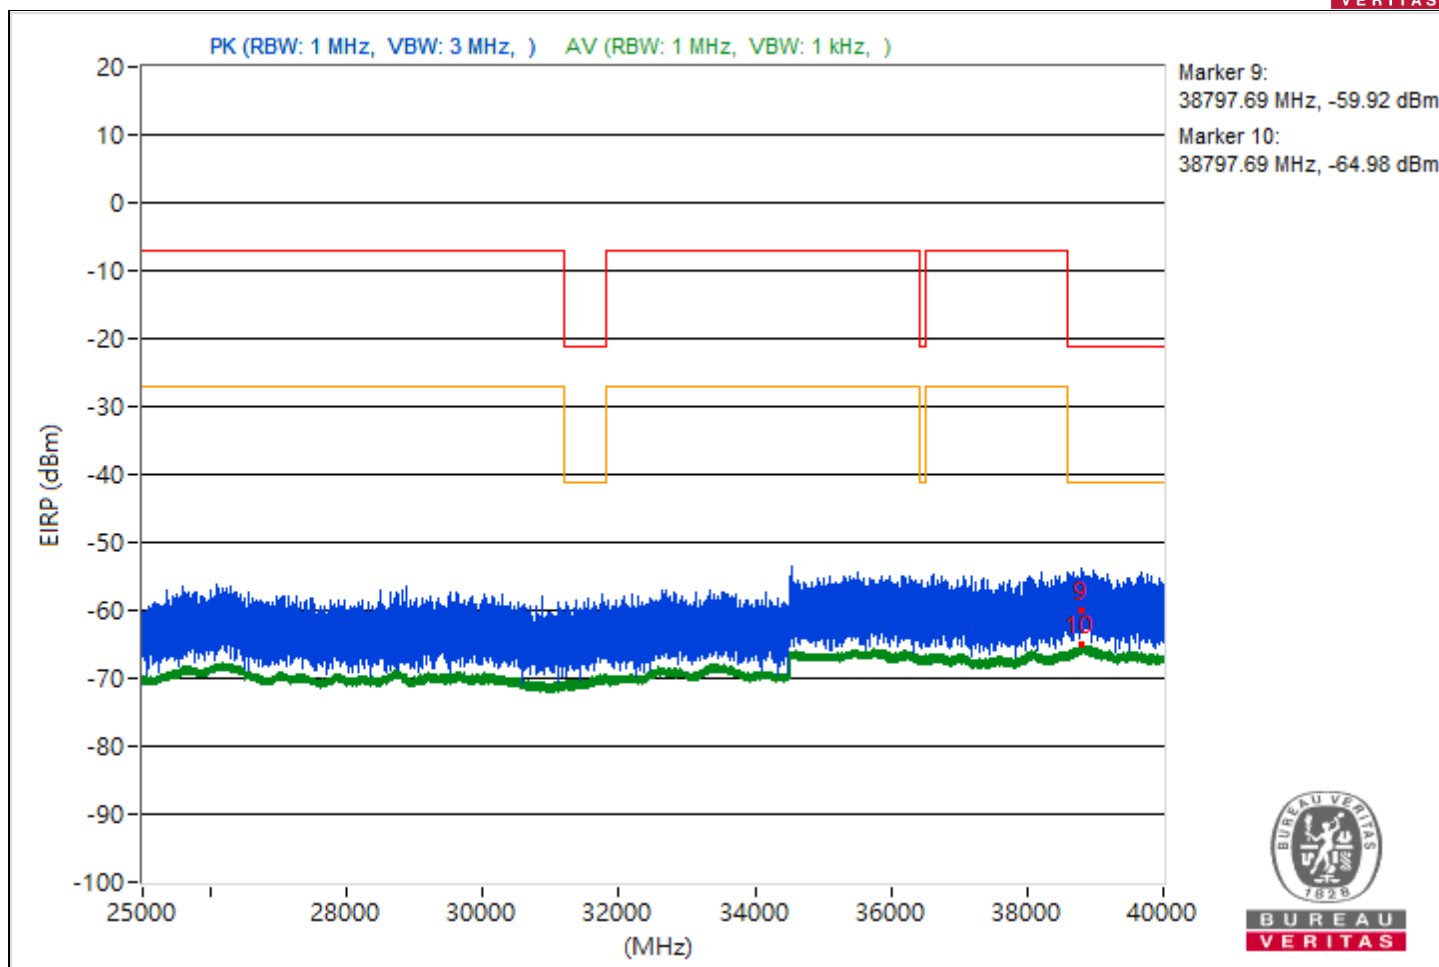


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.6	41.54 PK	74	-32.46	-58.64	4.92	-53.72
2	3791.6	34.39 AV	54	-19.61	-65.79	4.92	-60.87
3	14494.4	40.38 PK	74	-33.62	-59.8	4.92	-54.88
4	14494.4	33.85 AV	54	-20.15	-66.33	4.92	-61.41
5	21157.7	42.01 PK	74	-31.99	-58.17	4.92	-53.25
6	21157.7	35.44 AV	54	-18.56	-64.74	4.92	-59.82
7	22284.7	41.55 PK	74	-32.45	-58.63	4.92	-53.71
8	22284.7	36.78 AV	54	-17.22	-63.4	4.92	-58.48
9	38819.82	35.72 PK	74	-38.28	-64.46	4.92	-59.54
10	38819.82	30.35 AV	54	-23.65	-69.83	4.92	-64.91

Note: Margin value = Emission Level - Limit value

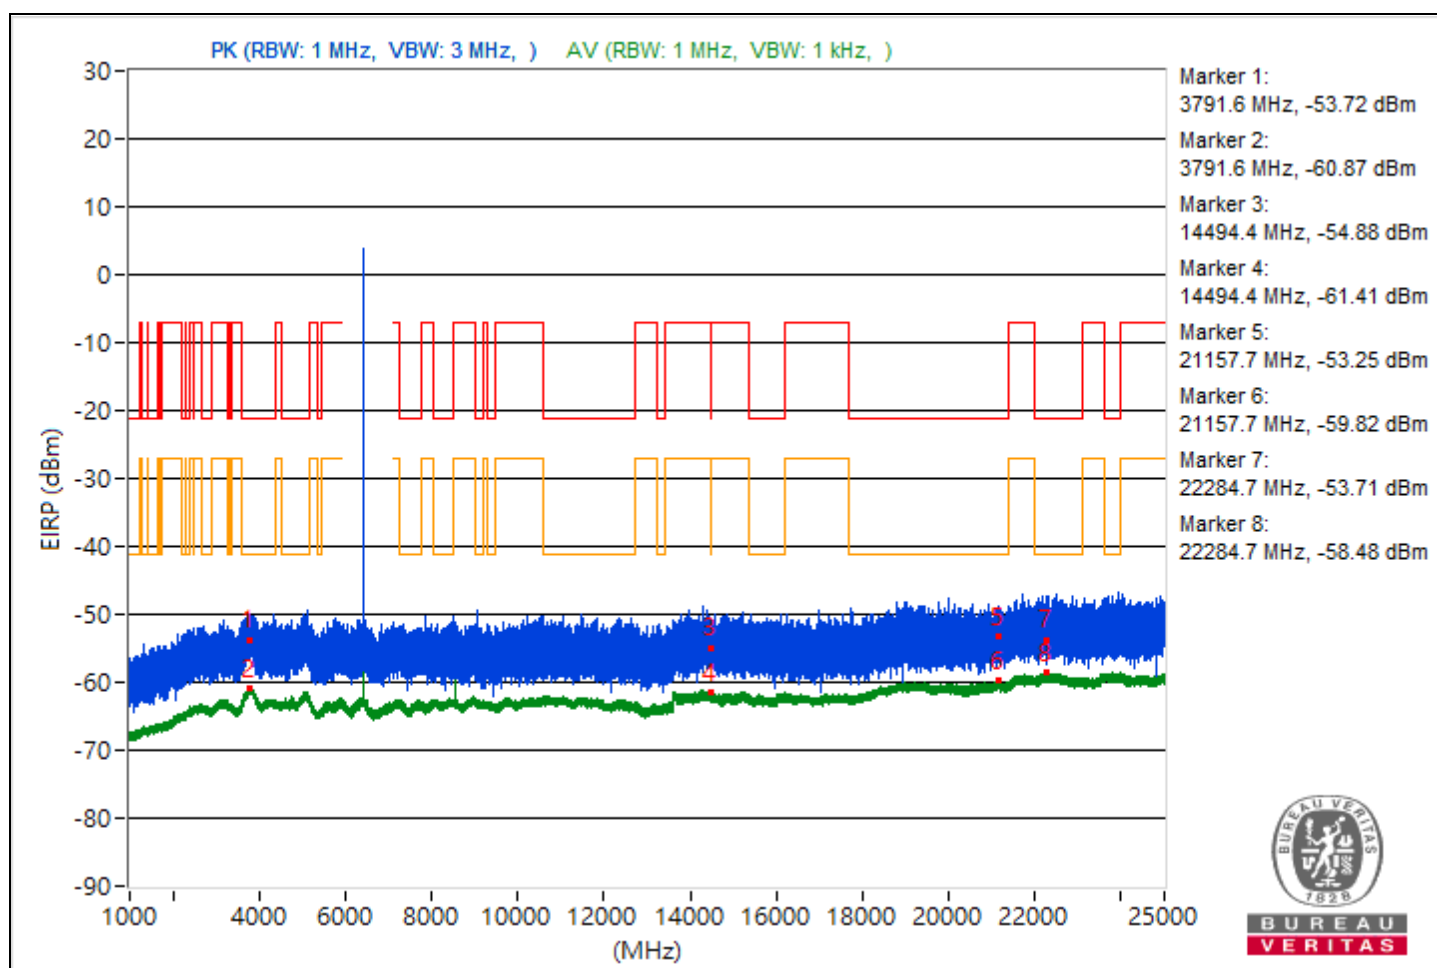


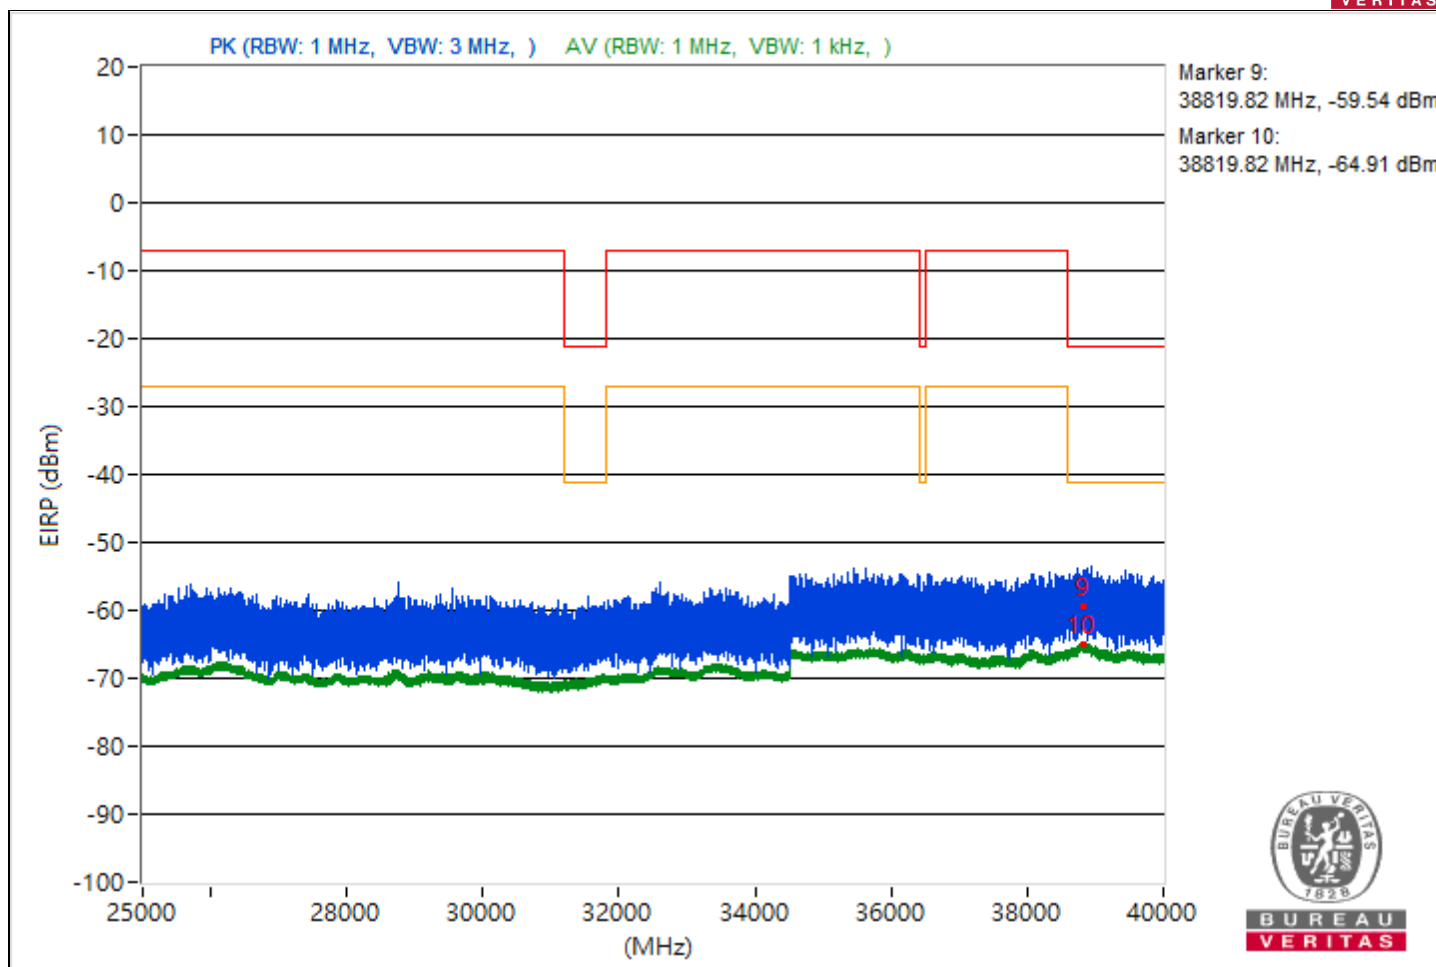


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.16	42.71 PK	74	-31.29	-57.47	4.92	-52.55
2	3807.16	34.71 AV	54	-19.29	-65.47	4.92	-60.55
3	14499.64	40.42 PK	74	-33.58	-59.76	4.92	-54.84
4	14499.64	33.74 AV	54	-20.26	-66.44	4.92	-61.52
5	21063.3	43.16 PK	74	-30.84	-57.02	4.92	-52.1
6	21063.3	35.33 AV	54	-18.67	-64.85	4.92	-59.93
7	22279.5	44.14 PK	74	-29.86	-56.04	4.92	-51.12
8	22279.5	36.69 AV	54	-17.31	-63.49	4.92	-58.57
9	38807.11	33.53 PK	74	-40.47	-66.65	4.92	-61.73
10	38807.11	30.37 AV	54	-23.63	-69.81	4.92	-64.89

Note: Margin value = Emission Level - Limit value

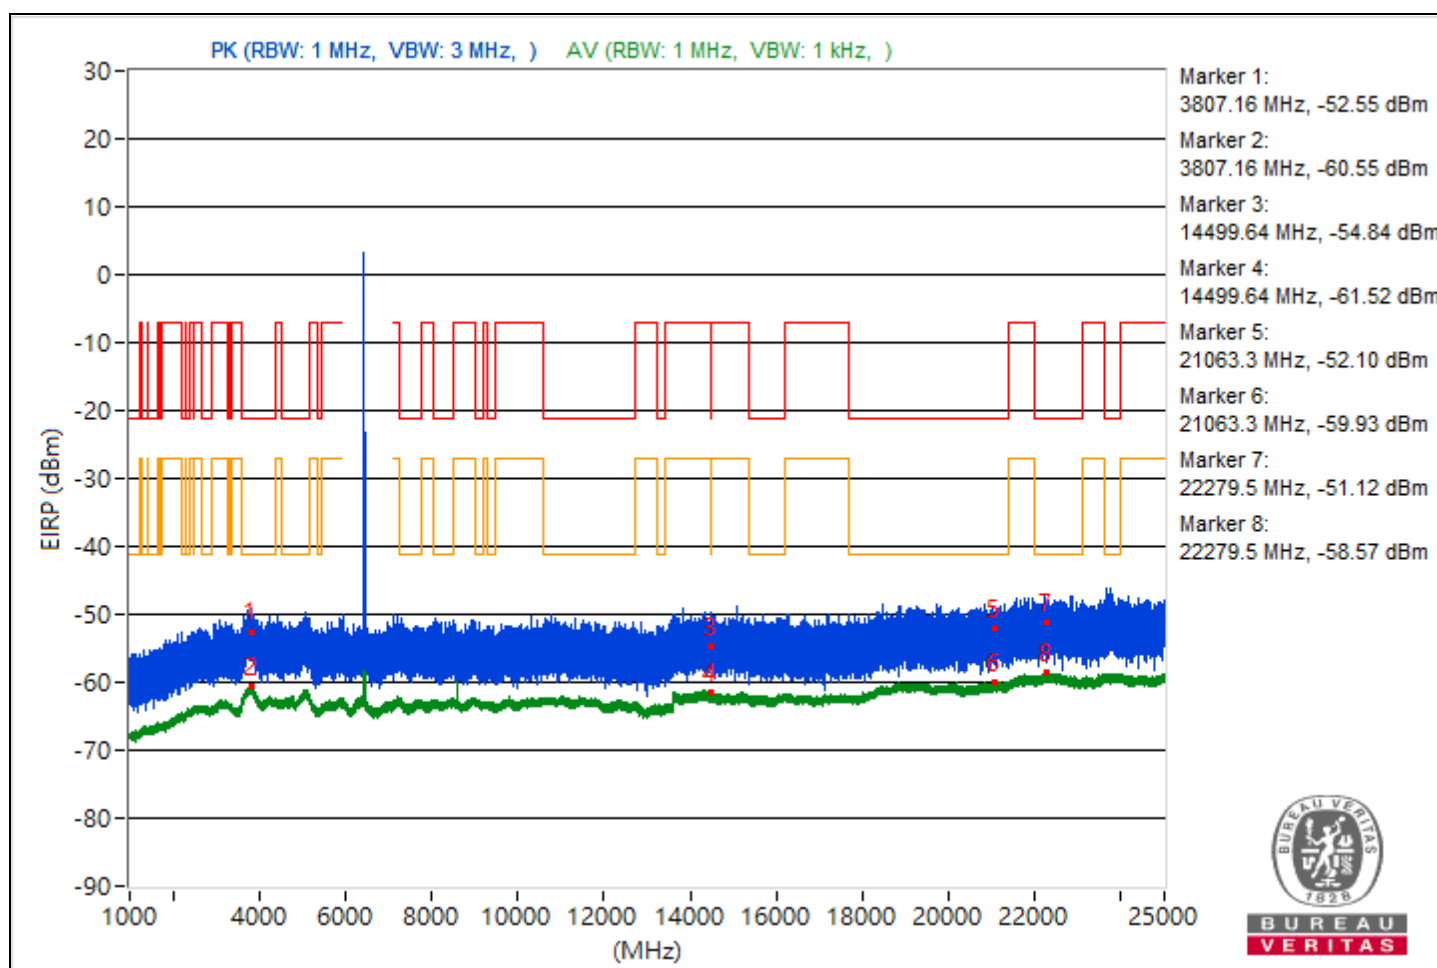

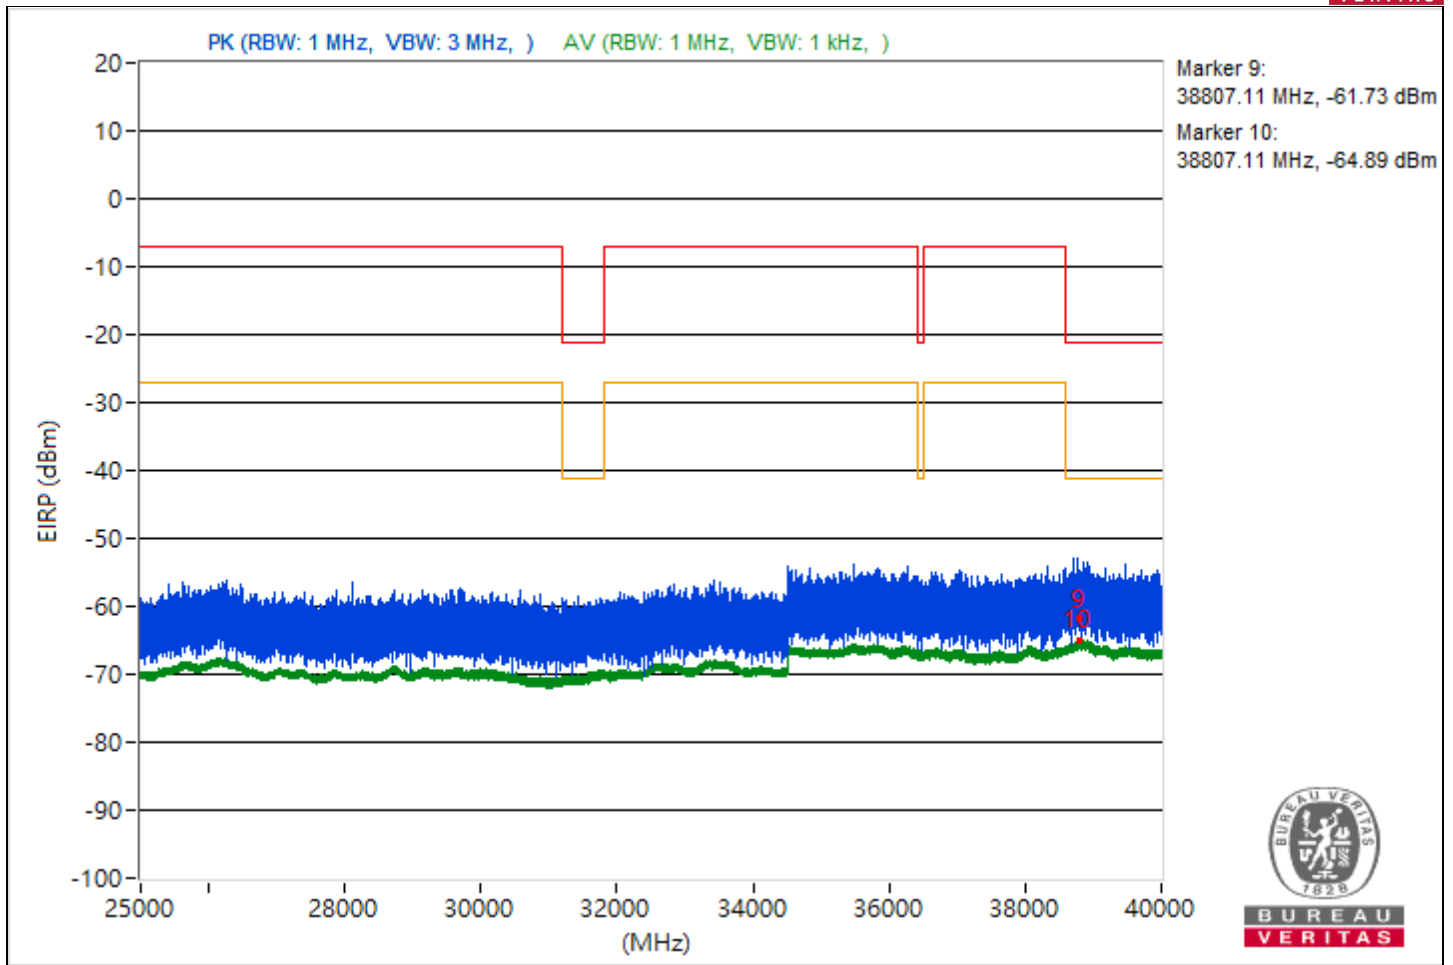



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.73	42.63 PK	74	-31.37	-57.55	4.92	-52.63
2	3789.73	34.38 AV	54	-19.62	-65.8	4.92	-60.88
3	14472.27	40.4 PK	74	-33.6	-59.78	4.92	-54.86
4	14472.27	33.68 AV	54	-20.32	-66.5	4.92	-61.58
5	21387.9	42.1 PK	74	-31.9	-58.08	4.92	-53.16
6	21387.9	35.56 AV	54	-18.44	-64.62	4.92	-59.7
7	23845.2	41.06 PK	74	-32.94	-59.12	4.92	-54.2
8	23845.2	36.81 AV	54	-17.19	-63.37	4.92	-58.45
9	38825.6	36.1 PK	74	-37.9	-64.08	4.92	-59.16
10	38825.6	30.54 AV	54	-23.46	-69.64	4.92	-64.72

Note: Margin value = Emission Level - Limit value

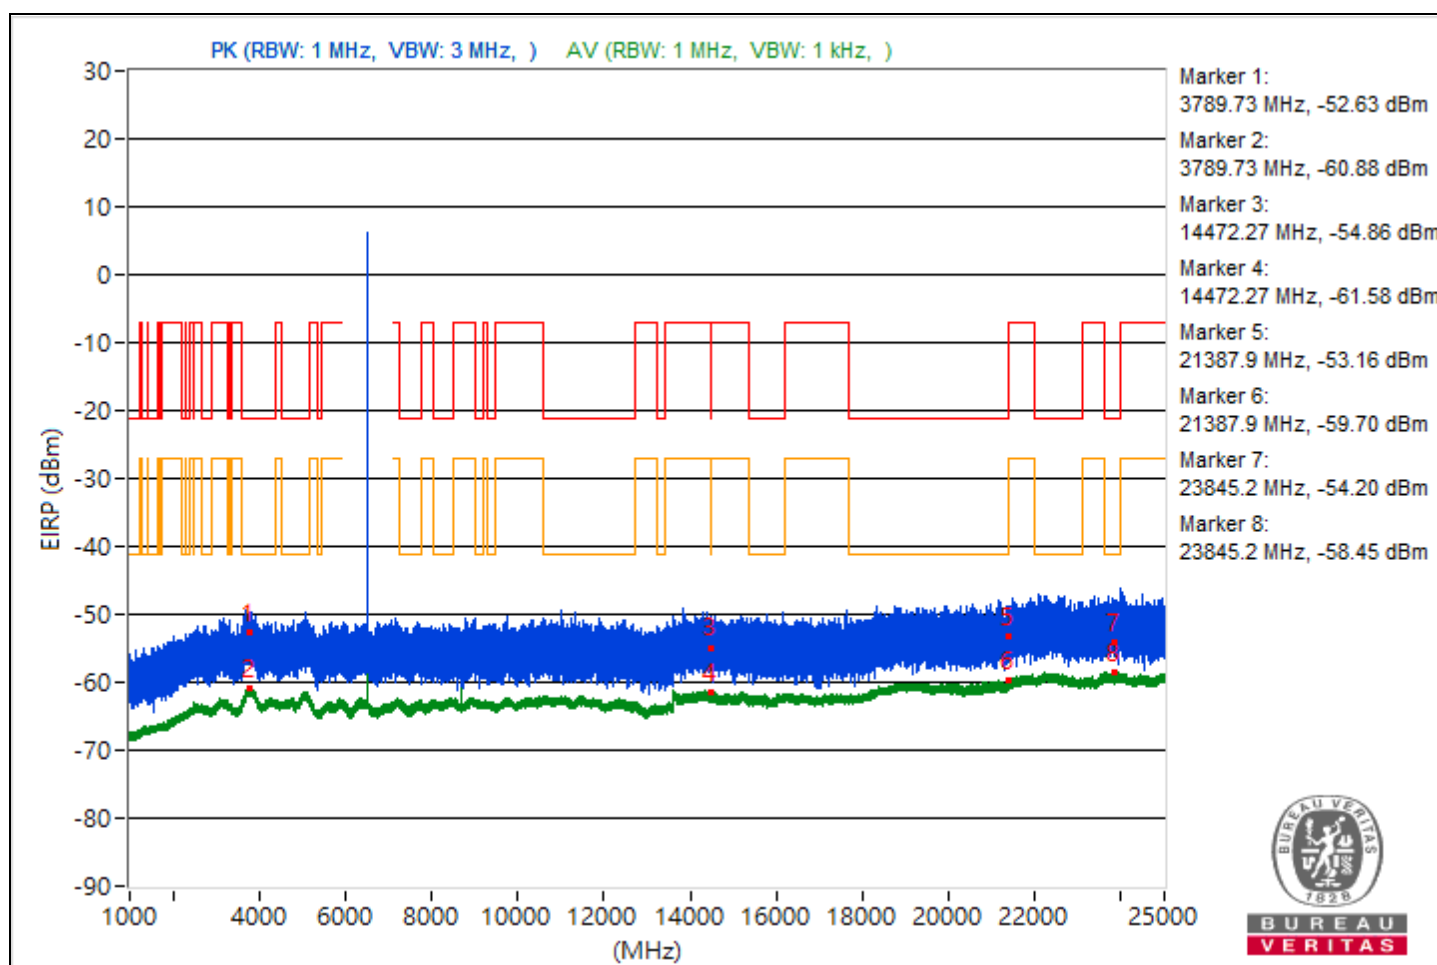


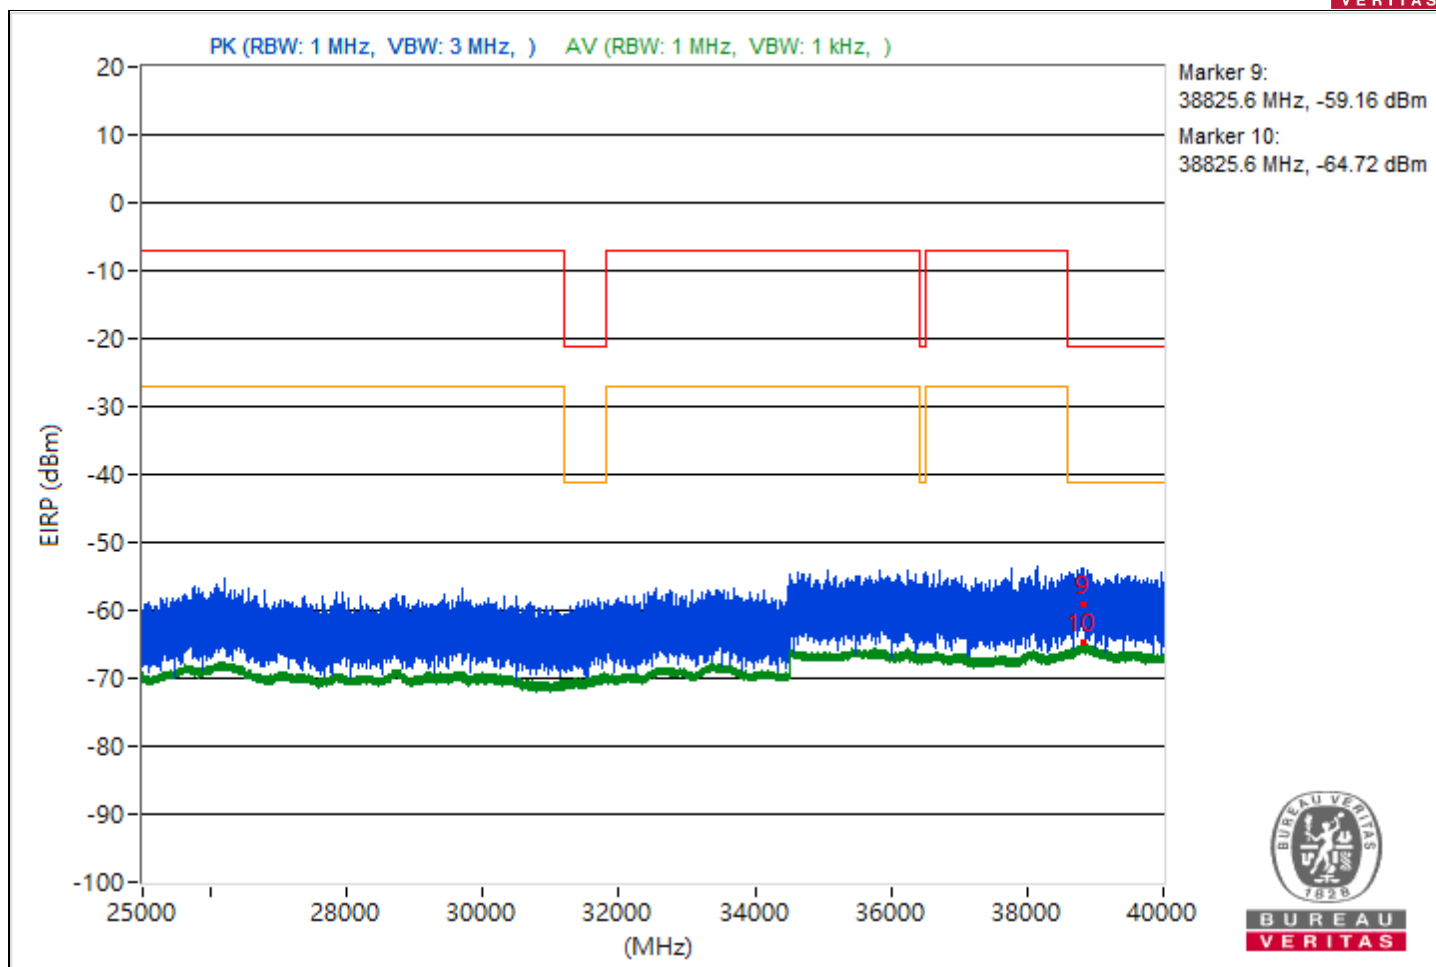


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.5	41.17 PK	74	-32.83	-59.01	4.92	-54.09
2	3803.5	34.4 AV	54	-19.6	-65.78	4.92	-60.86
3	14477.07	40 PK	74	-34	-60.18	4.92	-55.26
4	14477.07	33.62 AV	54	-20.38	-66.56	4.92	-61.64
5	21179.6	40.95 PK	74	-33.05	-59.23	4.92	-54.31
6	21179.6	35.38 AV	54	-18.62	-64.8	4.92	-59.88
7	22305.2	41.33 PK	74	-32.67	-58.85	4.92	-53.93
8	22305.2	36.7 AV	54	-17.3	-63.48	4.92	-58.56
9	38882.4	36.83 PK	74	-37.17	-63.35	4.92	-58.43
10	38882.4	30.35 AV	54	-23.65	-69.83	4.92	-64.91

Note: Margin value = Emission Level - Limit value

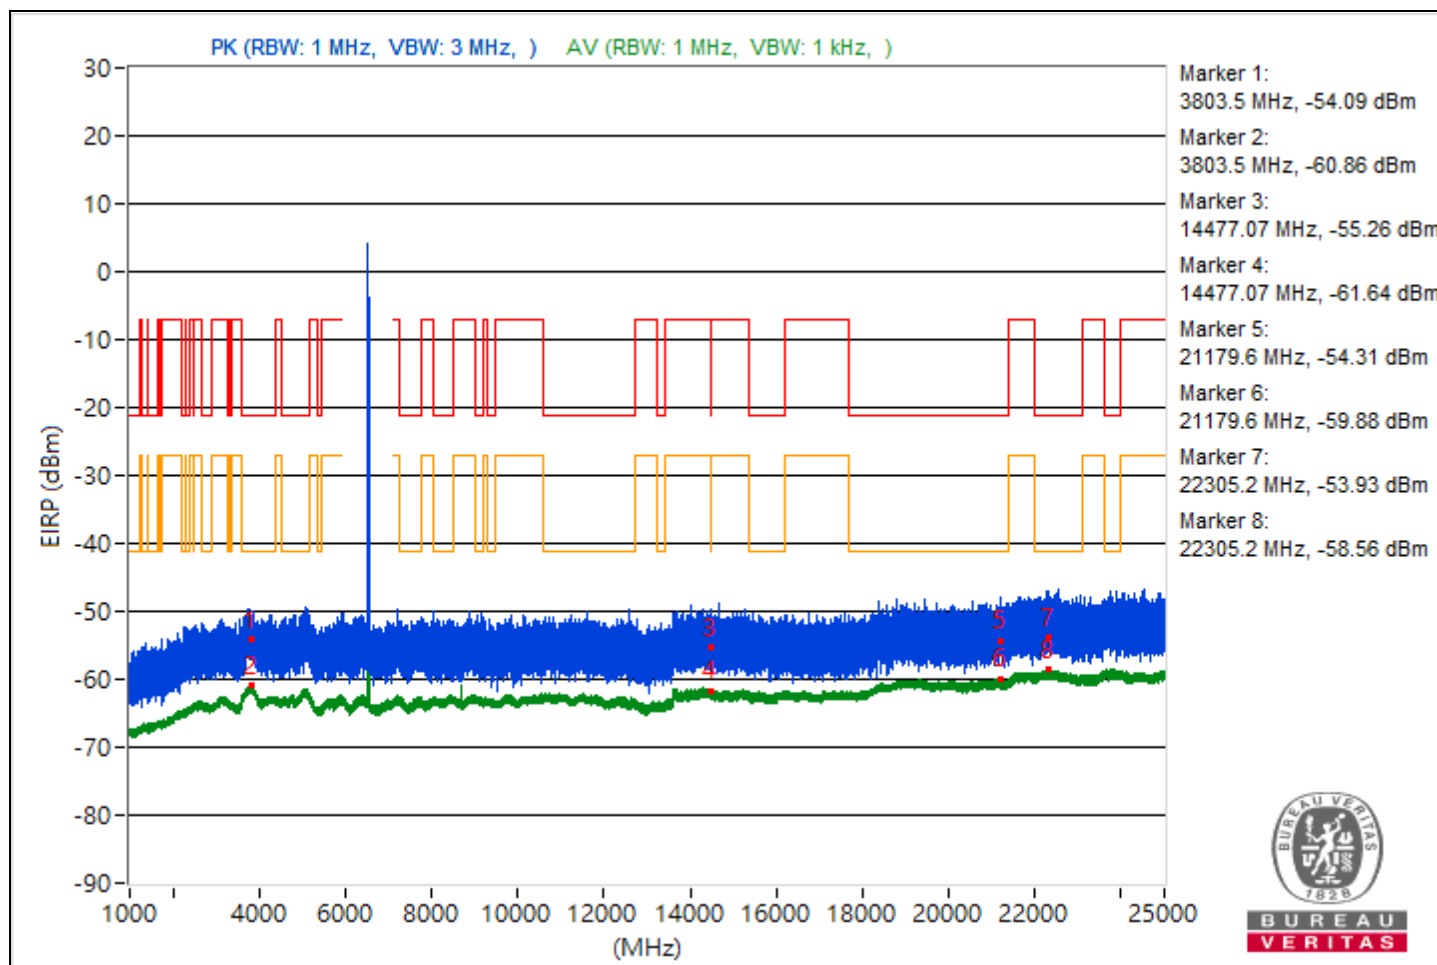


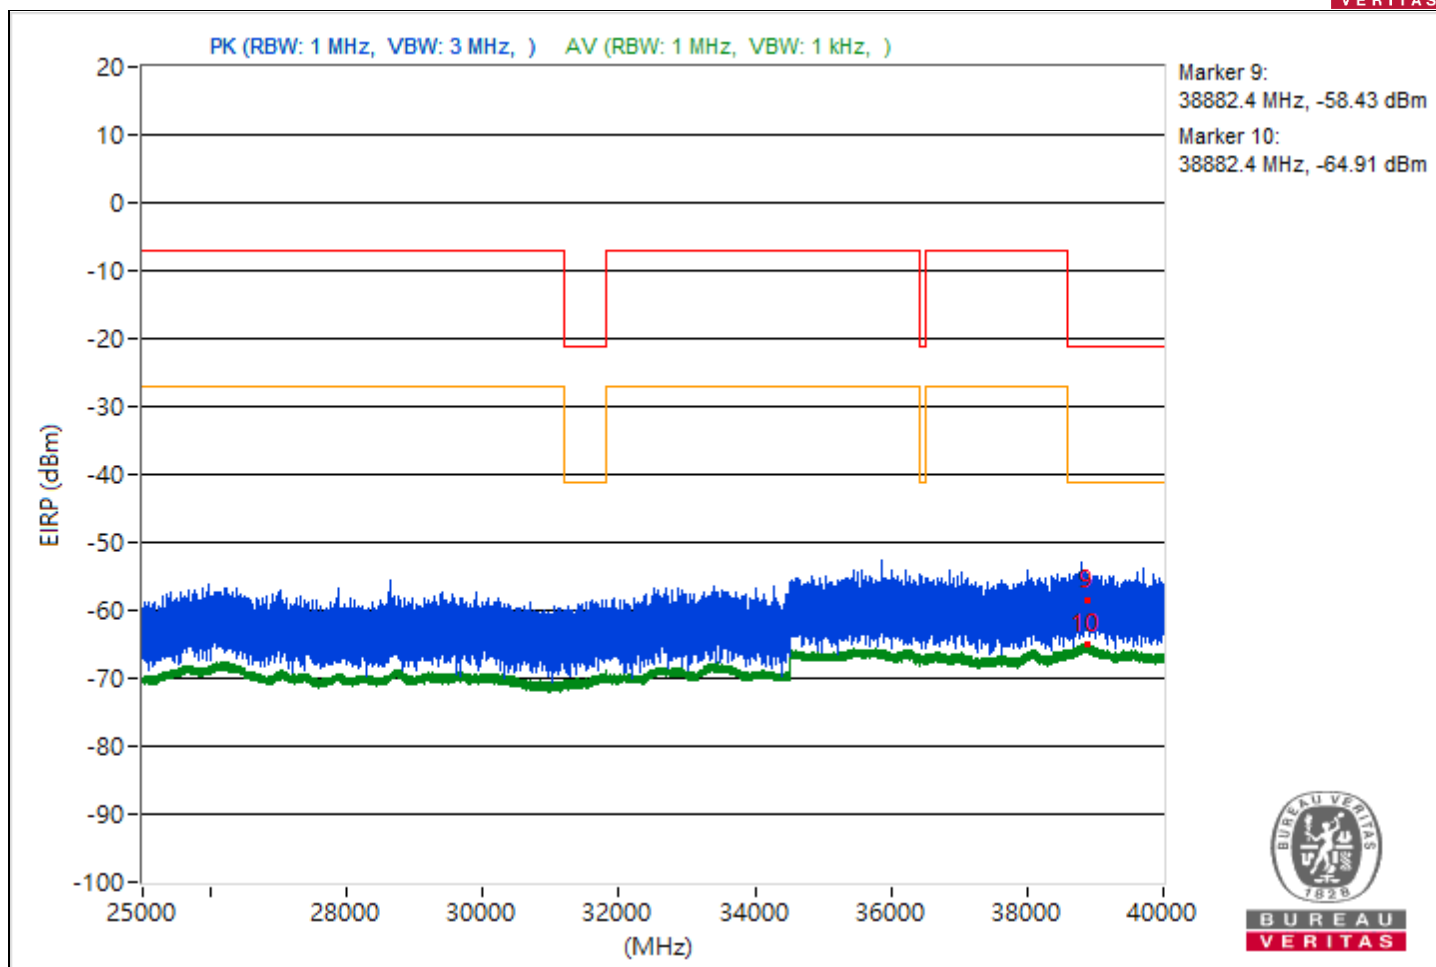


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.31	39.55 PK	74	-34.45	-60.63	4.92	-55.71
2	3814.31	34.44 AV	54	-19.56	-65.74	4.92	-60.82
3	14480.18	42.19 PK	74	-31.81	-57.99	4.92	-53.07
4	14480.18	33.84 AV	54	-20.16	-66.34	4.92	-61.42
5	21040.7	43.19 PK	74	-30.81	-56.99	4.92	-52.07
6	21040.7	35.42 AV	54	-18.58	-64.76	4.92	-59.84
7	23758	43.41 PK	74	-30.59	-56.77	4.92	-51.85
8	23758	36.64 AV	54	-17.36	-63.54	4.92	-58.62
9	38813.07	38.2 PK	74	-35.8	-61.98	4.92	-57.06
10	38813.07	30.32 AV	54	-23.68	-69.86	4.92	-64.94

Note: Margin value = Emission Level - Limit value

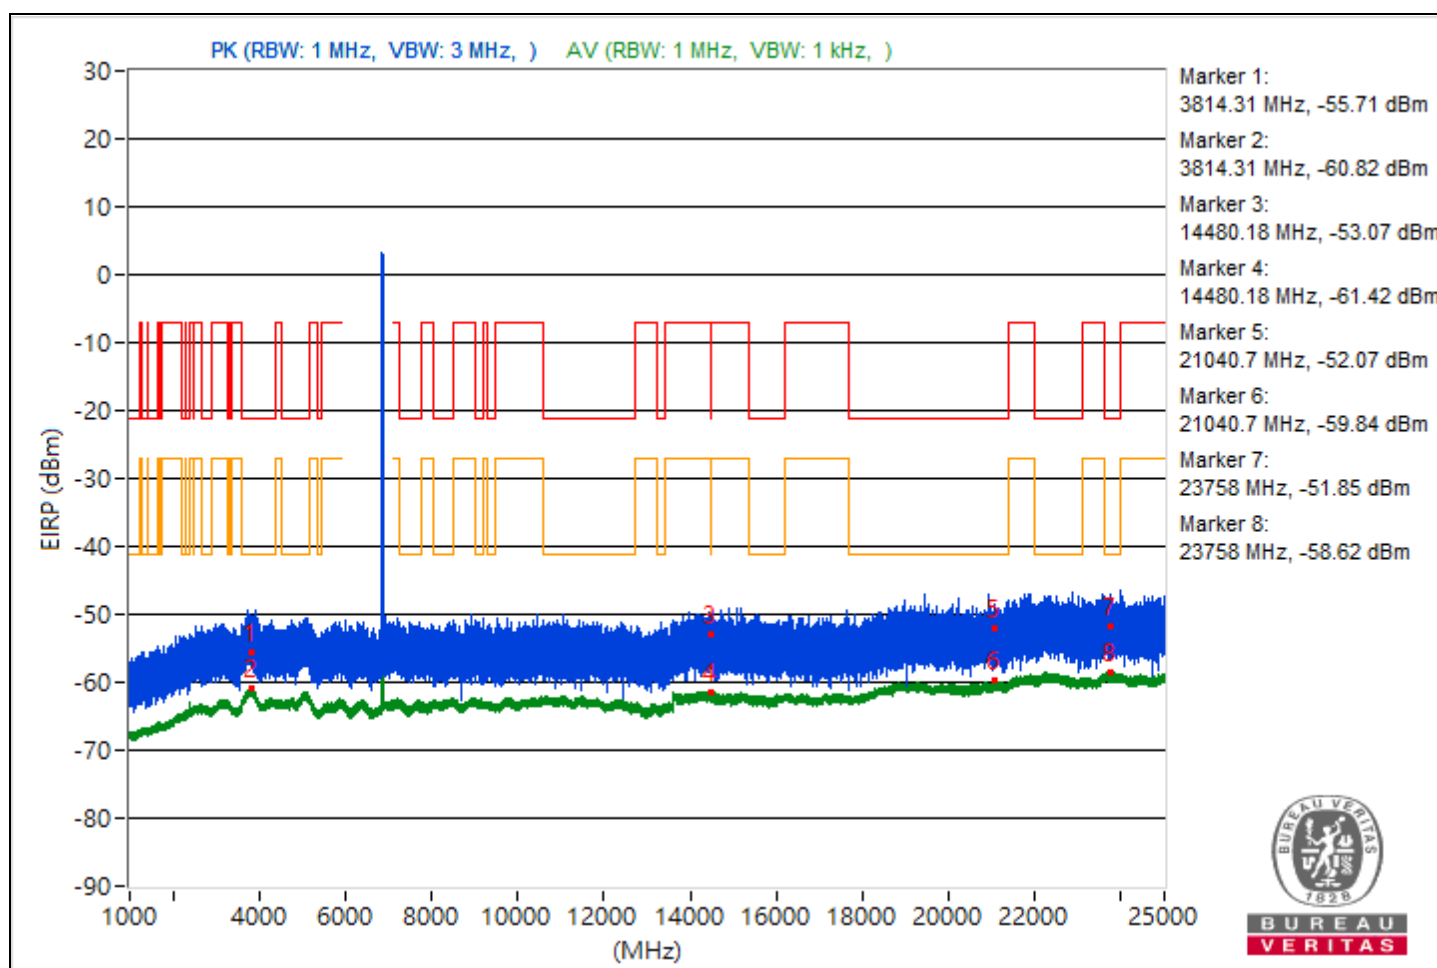


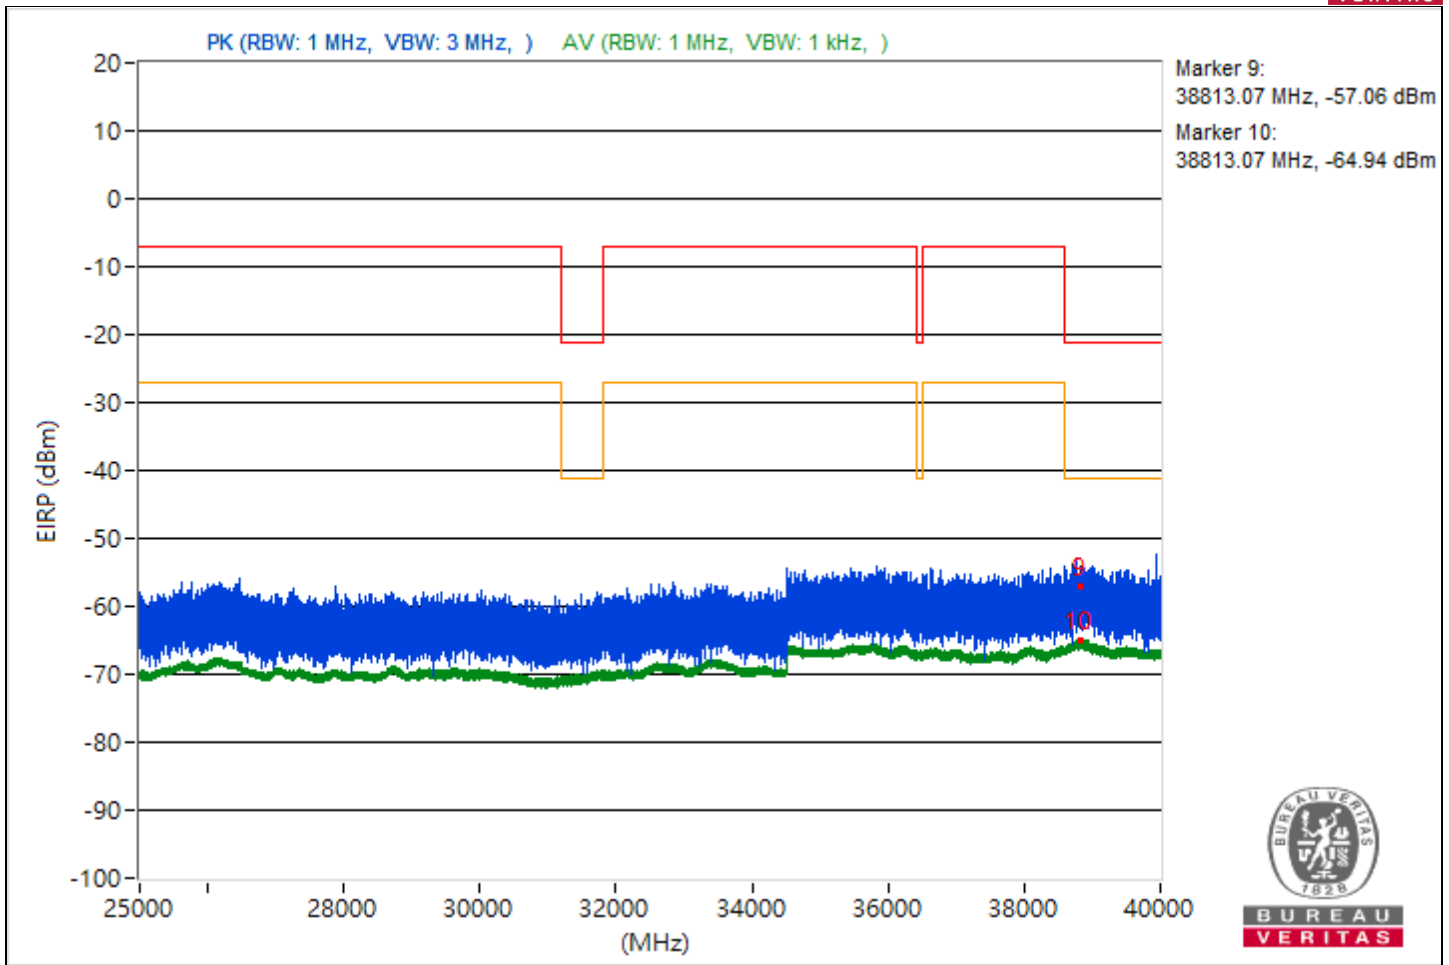


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3818.51	40.89 PK	74	-33.11	-59.29	4.92	-54.37
2	3818.51	34.6 AV	54	-19.4	-65.58	4.92	-60.66
3	14471.56	41.34 PK	74	-32.66	-58.84	4.92	-53.92
4	14471.56	33.61 AV	54	-20.39	-66.57	4.92	-61.65
5	21122.7	43.42 PK	74	-30.58	-56.76	4.92	-51.84
6	21122.7	35.45 AV	54	-18.55	-64.73	4.92	-59.81
7	23867.5	43.72 PK	74	-30.28	-56.46	4.92	-51.54
8	23867.5	36.7 AV	54	-17.3	-63.48	4.92	-58.56
9	38908	35.3 PK	74	-38.7	-64.88	4.92	-59.96
10	38908	30.3 AV	54	-23.7	-69.88	4.92	-64.96

Note: Margin value = Emission Level - Limit value

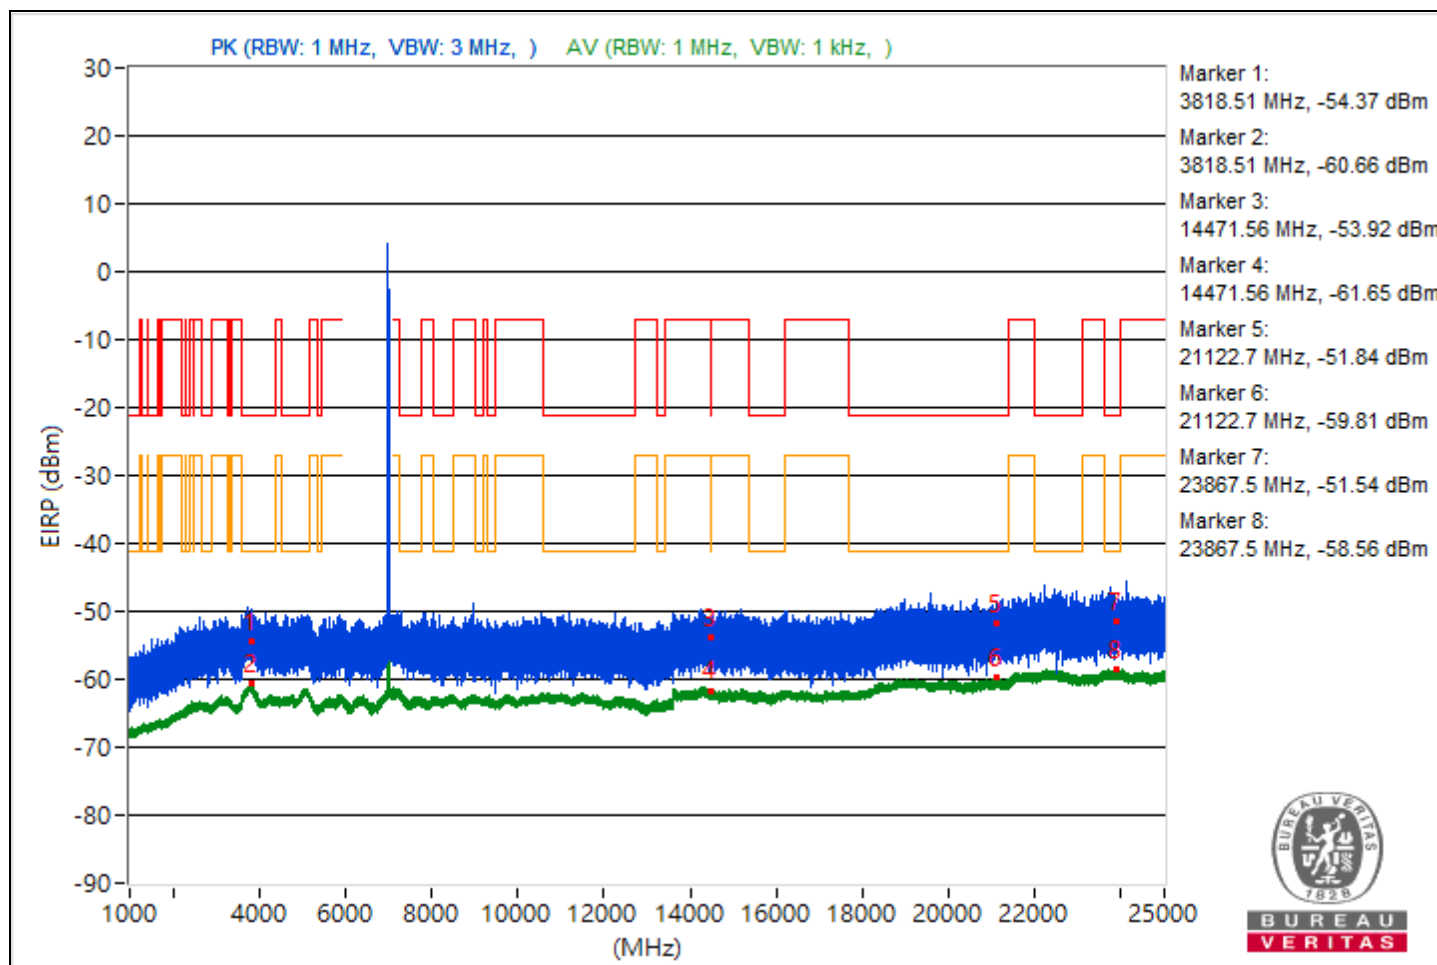


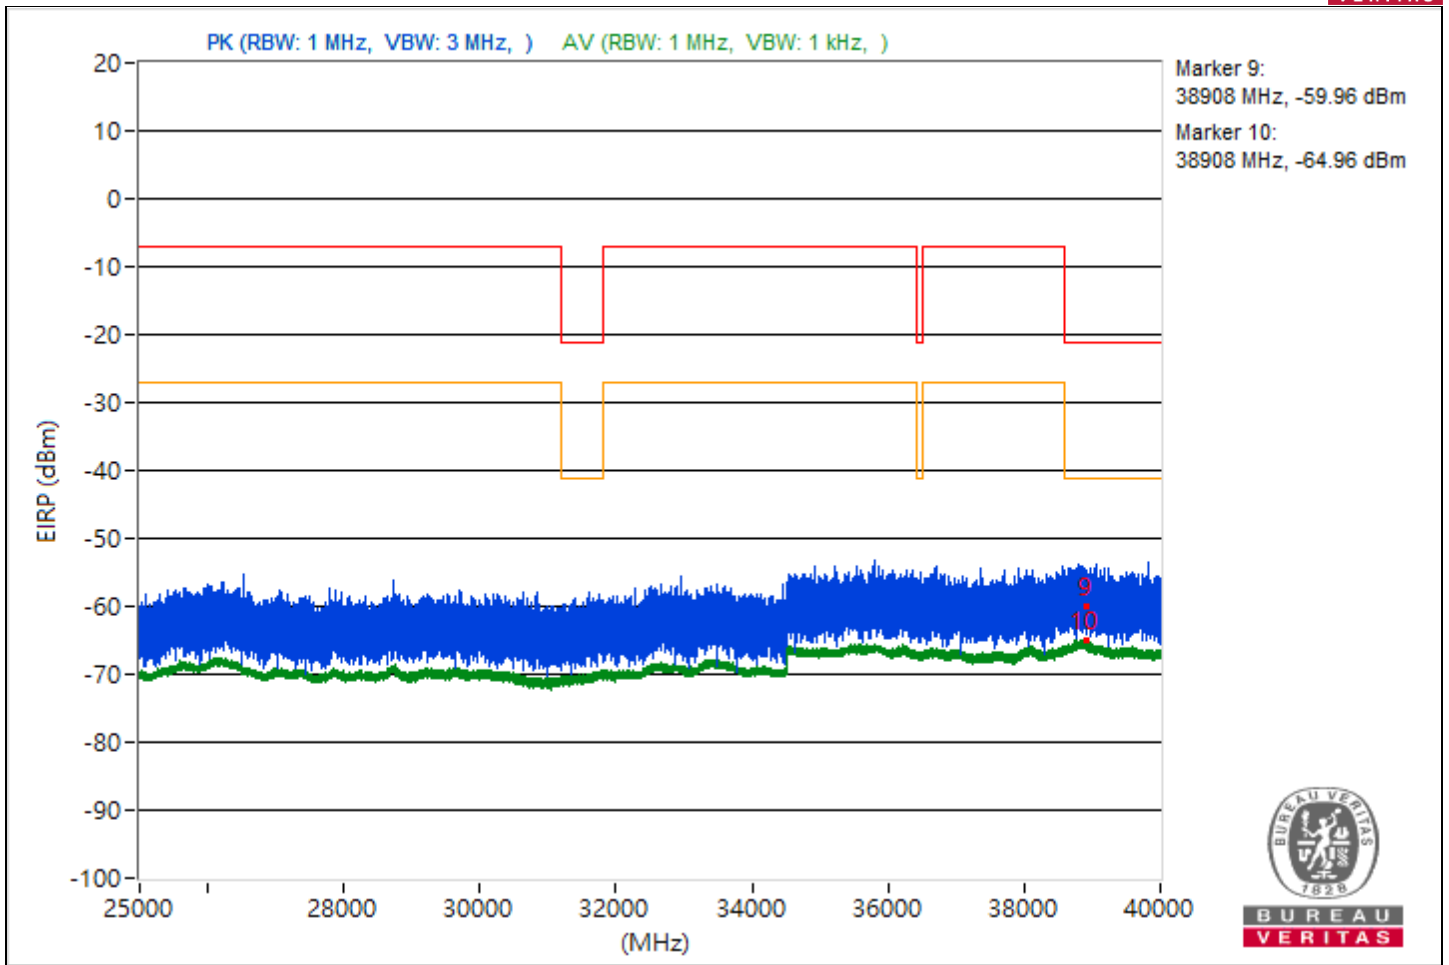


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.46	40.86 PK	74	-33.14	-59.32	4.92	-54.4
2	3820.46	34.58 AV	54	-19.42	-65.6	4.92	-60.68
3	7255.74	39.89 PK	74	-34.11	-60.29	4.92	-55.37
4	7255.74	34.21 AV	54	-19.79	-65.97	4.92	-61.05
5	21164.2	41.69 PK	74	-32.31	-58.49	4.92	-53.57
6	21164.2	35.33 AV	54	-18.67	-64.85	4.92	-59.93
7	22265.2	44.64 PK	74	-29.36	-55.54	4.92	-50.62
8	22265.2	36.69 AV	54	-17.31	-63.49	4.92	-58.57
9	38792.53	34.71 PK	74	-39.29	-65.47	4.92	-60.55
10	38792.53	30.28 AV	54	-23.72	-69.9	4.92	-64.98

Note: Margin value = Emission Level - Limit value

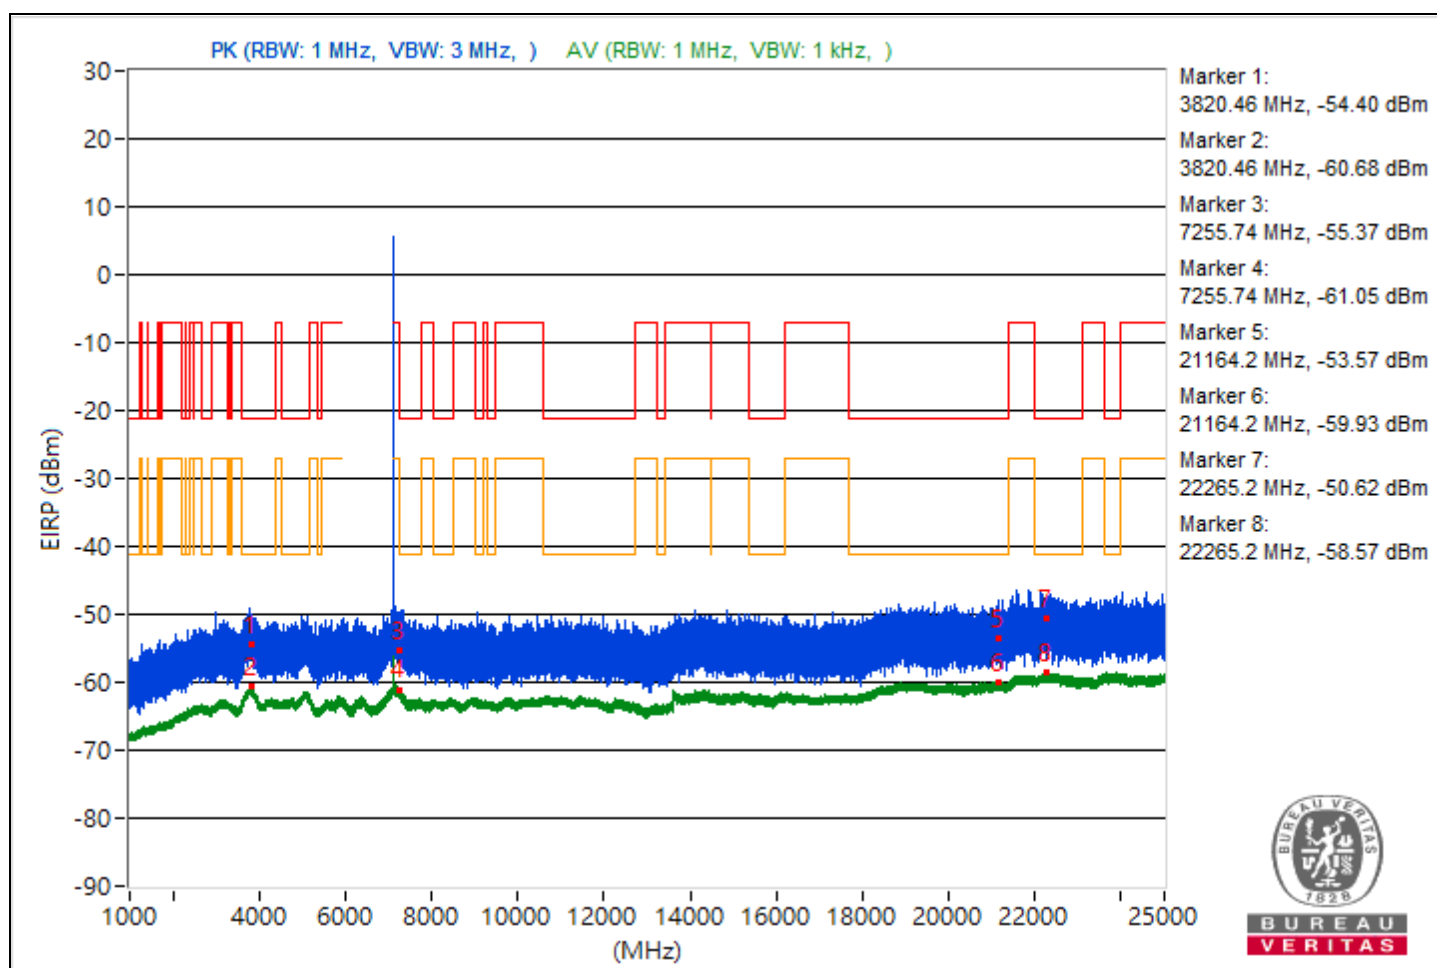

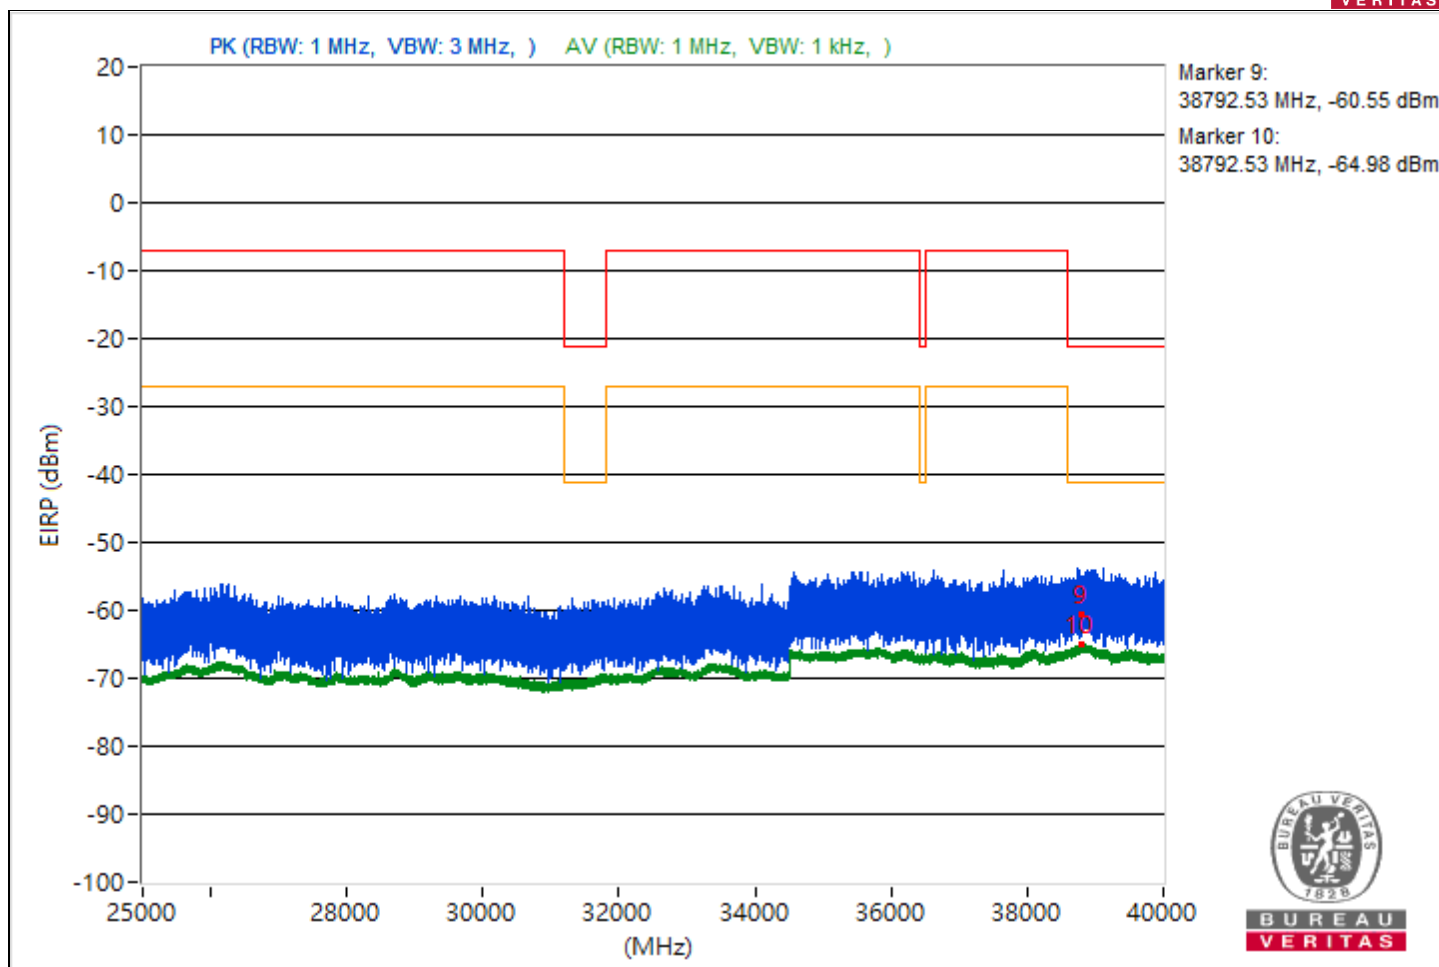



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3845.03	41.75 PK	74	-32.25	-58.43	4.92	-53.51
2	3845.03	34.52 AV	54	-19.48	-65.66	4.92	-60.74
3	14474.49	42.29 PK	74	-31.71	-57.89	4.92	-52.97
4	14474.49	33.74 AV	54	-20.26	-66.44	4.92	-61.52
5	21153.1	43.41 PK	74	-30.59	-56.77	4.92	-51.85
6	21153.1	35.51 AV	54	-18.49	-64.67	4.92	-59.75
7	23751.9	44.47 PK	74	-29.53	-55.71	4.92	-50.79
8	23751.9	36.78 AV	54	-17.22	-63.4	4.92	-58.48
9	38836	36.69 PK	74	-37.31	-63.49	4.92	-58.57
10	38836	30.48 AV	54	-23.52	-69.7	4.92	-64.78

Note: Margin value = Emission Level - Limit value

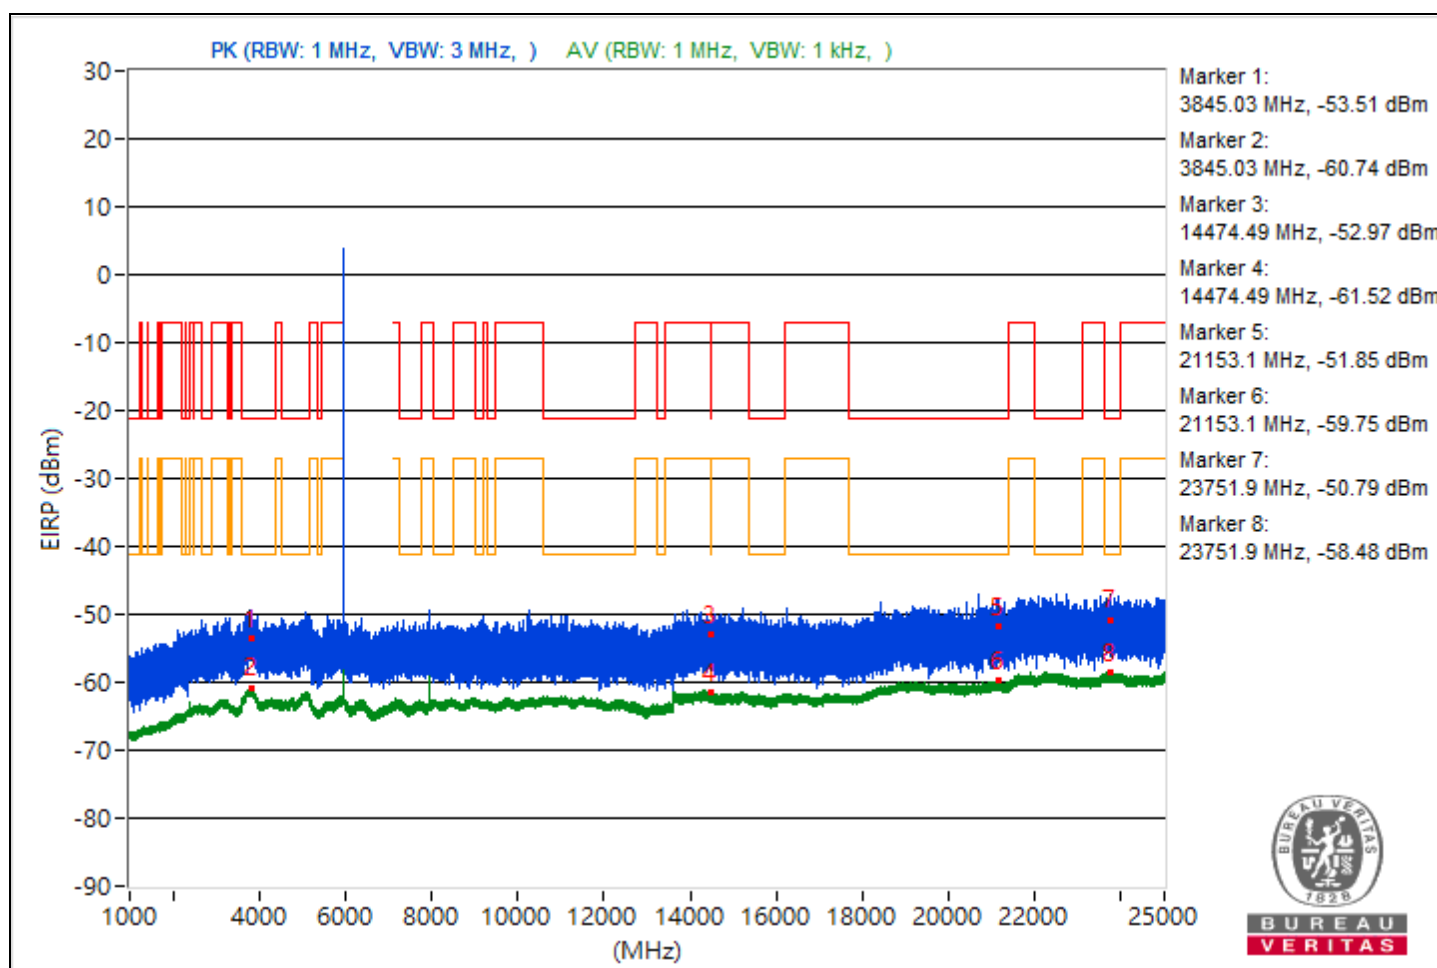

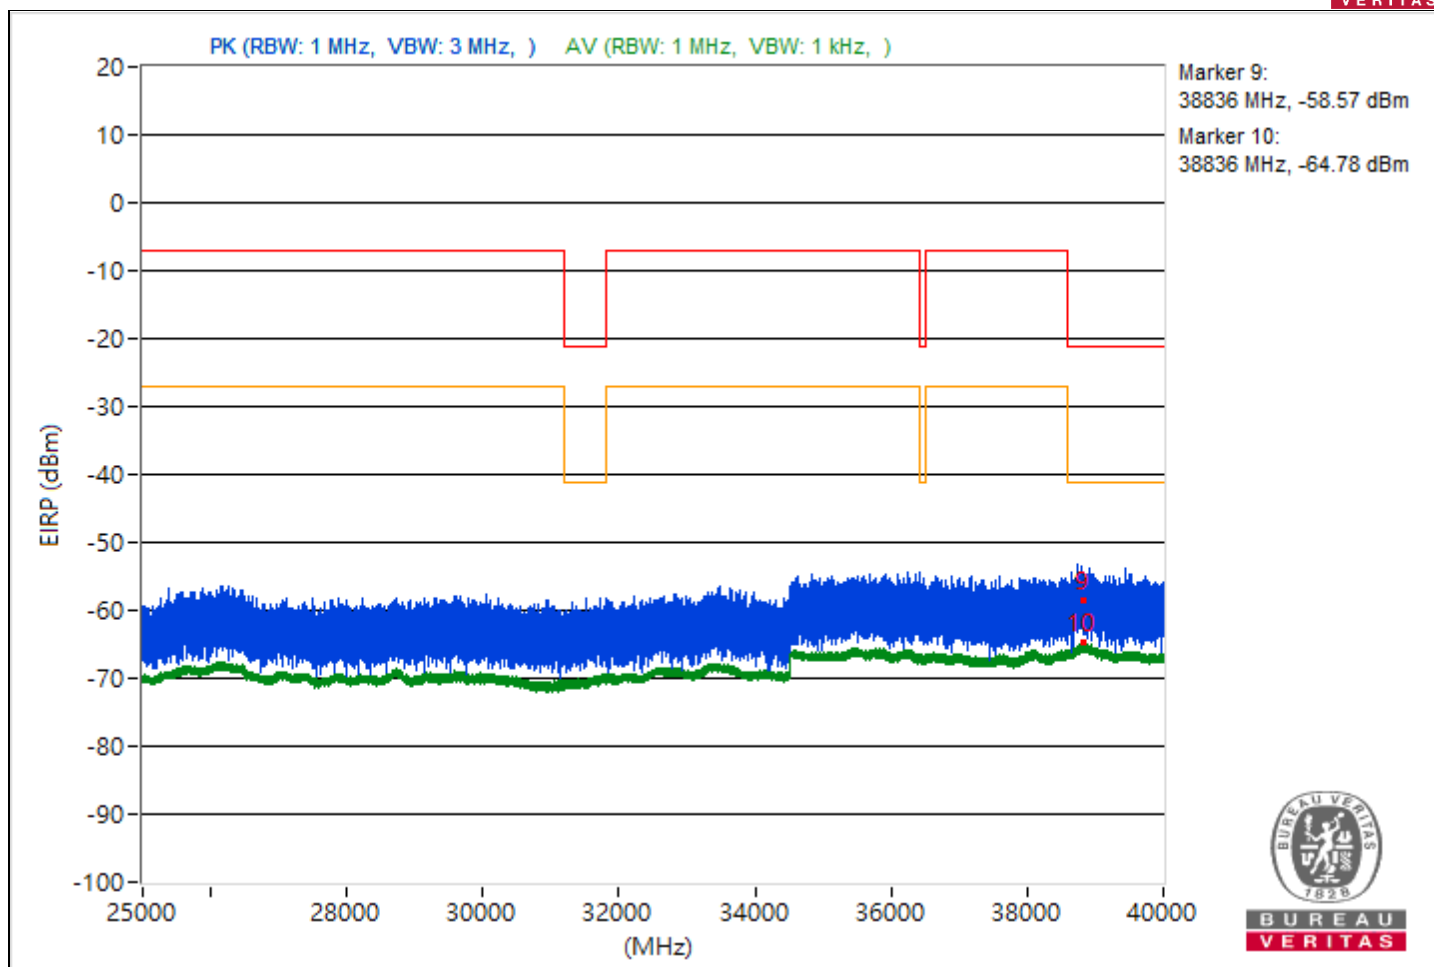



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3795.8	41.68 PK	74	-32.32	-58.5	4.92	-53.58
2	3795.8	34.46 AV	54	-19.54	-65.72	4.92	-60.8
3	14489.51	38.63 PK	74	-35.37	-61.55	4.92	-56.63
4	14489.51	33.62 AV	54	-20.38	-66.56	4.92	-61.64
5	21151.7	40.9 PK	74	-33.1	-59.28	4.92	-54.36
6	21151.7	35.5 AV	54	-18.5	-64.68	4.92	-59.76
7	23815	42.73 PK	74	-31.27	-57.45	4.92	-52.53
8	23815	36.7 AV	54	-17.3	-63.48	4.92	-58.56
9	38830.76	35.43 PK	74	-38.57	-64.75	4.92	-59.83
10	38830.76	30.25 AV	54	-23.75	-69.93	4.92	-65.01

Note: Margin value = Emission Level - Limit value

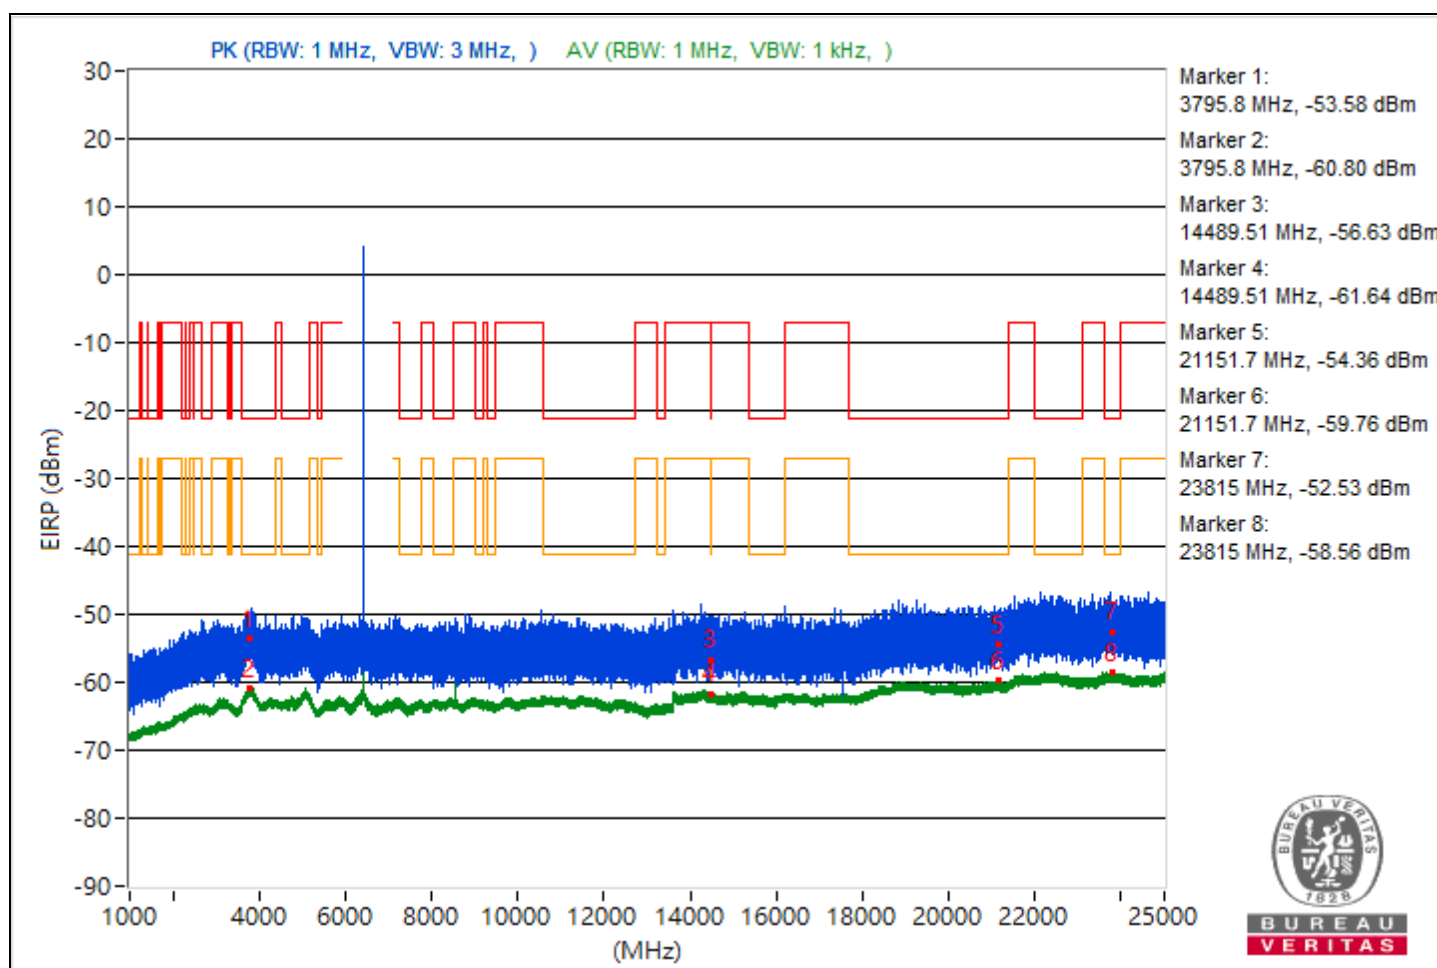


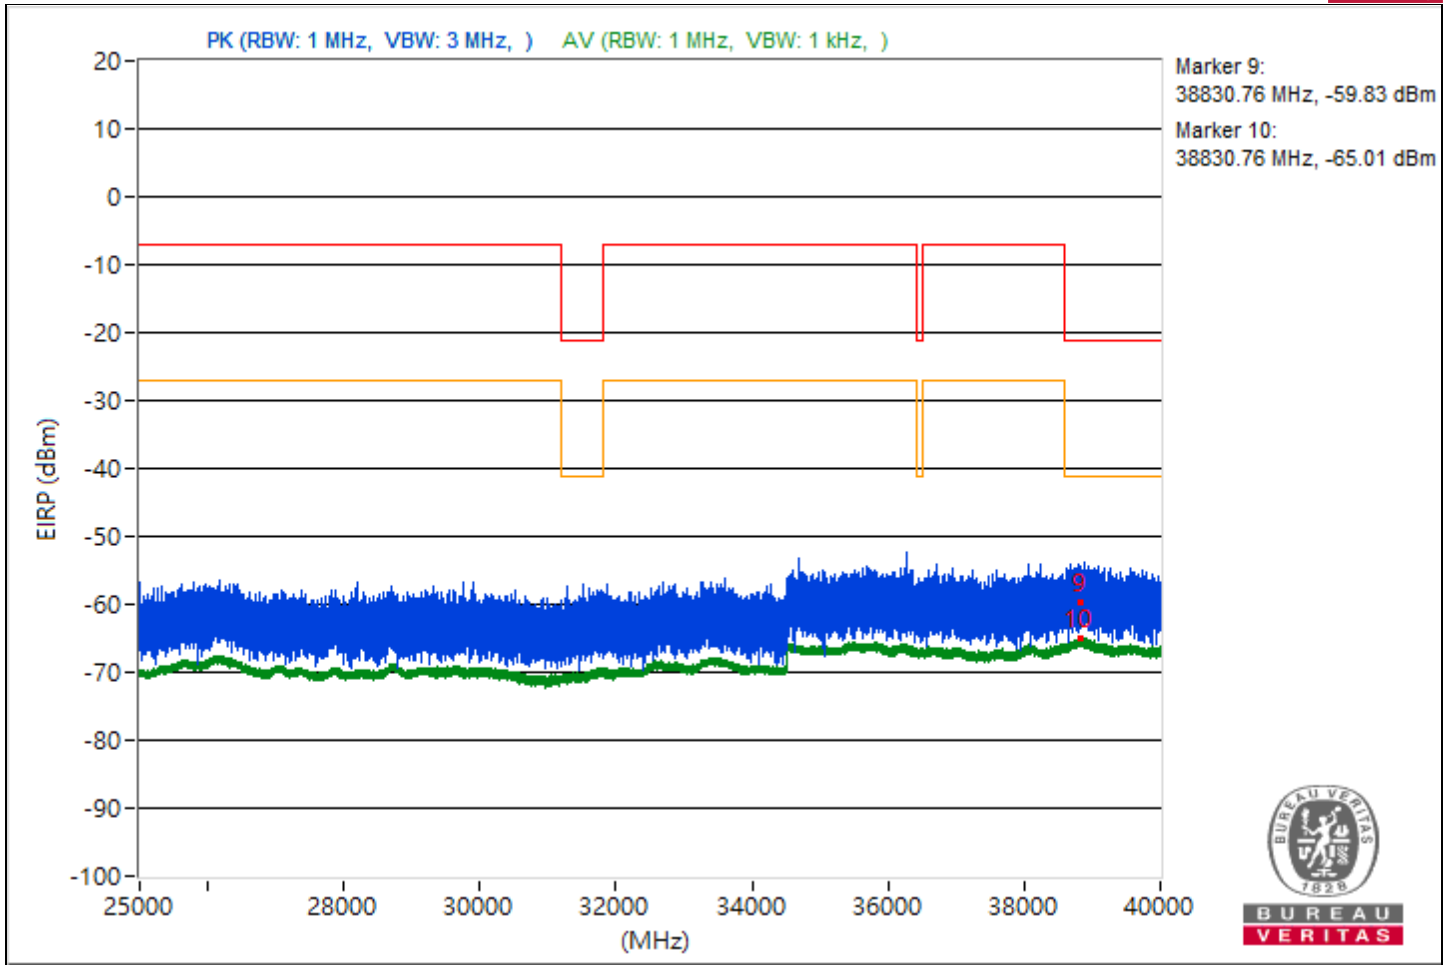


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.11	41.17 PK	74	-32.83	-59.01	4.92	-54.09
2	3789.11	34.44 AV	54	-19.56	-65.74	4.92	-60.82
3	14487.02	42.06 PK	74	-31.94	-58.12	4.92	-53.2
4	14487.02	33.67 AV	54	-20.33	-66.51	4.92	-61.59
5	21153.8	40.49 PK	74	-33.51	-59.69	4.92	-54.77
6	21153.8	35.45 AV	54	-18.55	-64.73	4.92	-59.81
7	23848.7	42.65 PK	74	-31.35	-57.53	4.92	-52.61
8	23848.7	36.65 AV	54	-17.35	-63.53	4.92	-58.61
9	38840.09	32.74 PK	74	-41.26	-67.44	4.92	-62.52
10	38840.09	30.6 AV	54	-23.4	-69.58	4.92	-64.66

Note: Margin value = Emission Level - Limit value

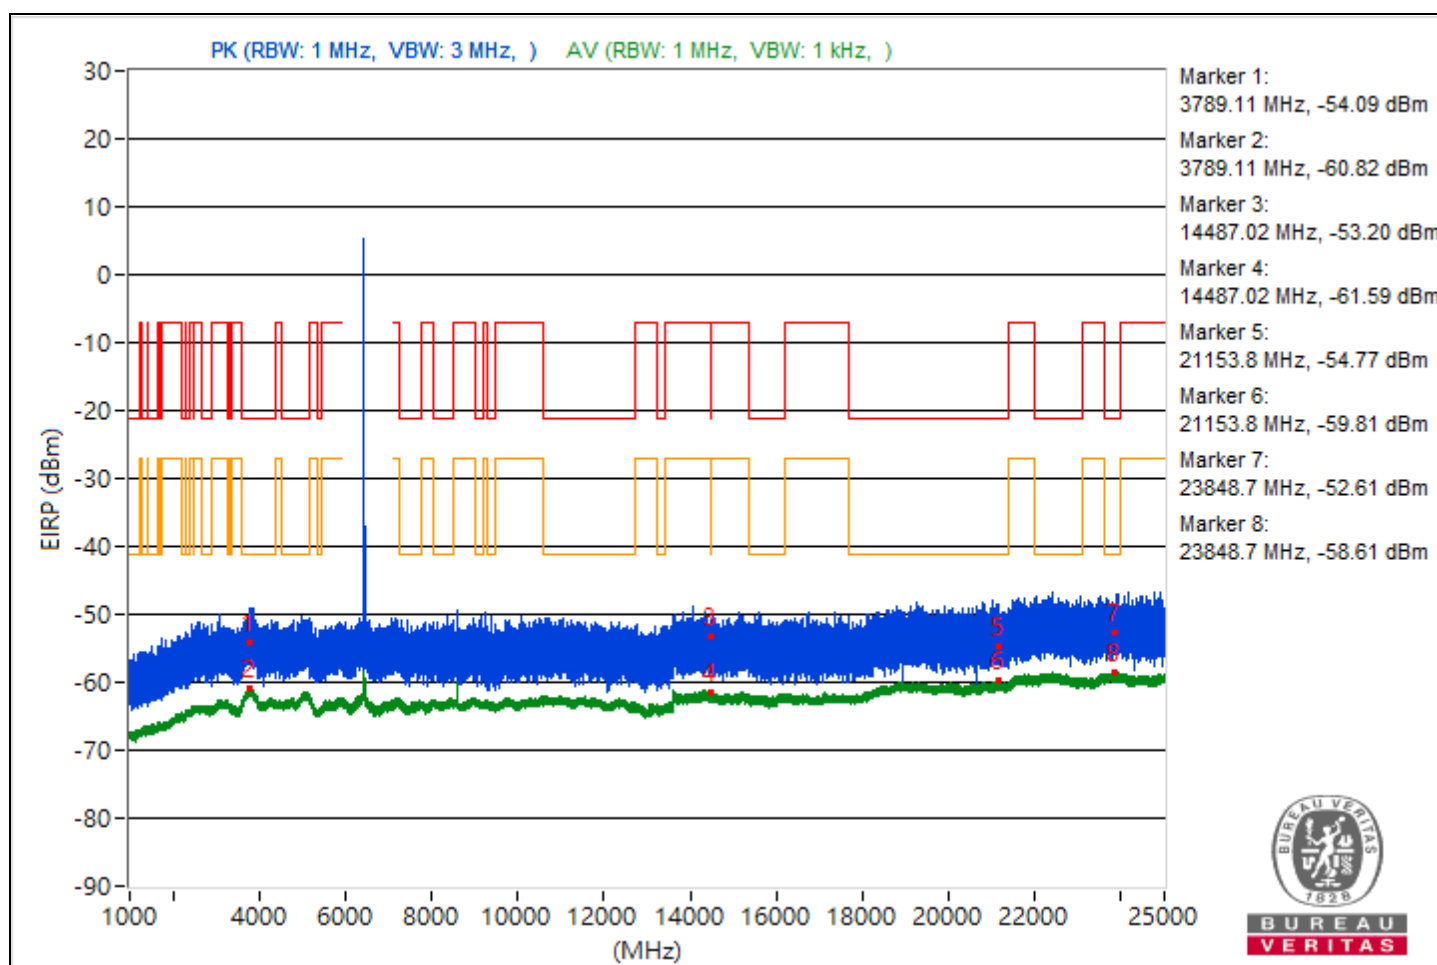

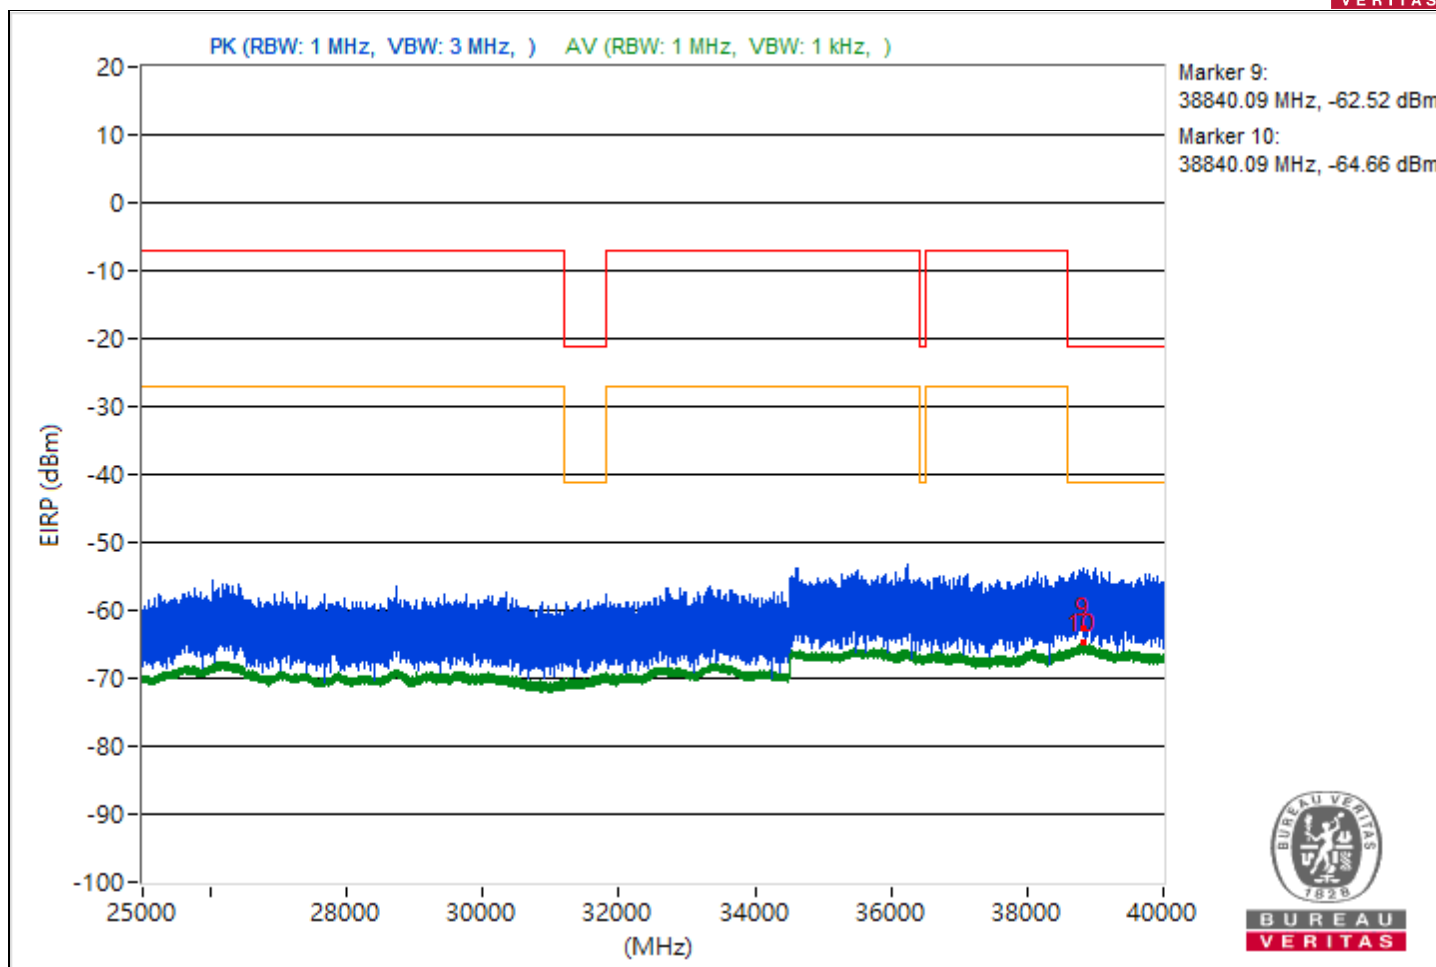



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.29	43.56 PK	74	-30.44	-56.62	4.92	-51.7
2	3791.29	34.55 AV	54	-19.45	-65.63	4.92	-60.71
3	14476.09	38.88 PK	74	-35.12	-61.3	4.92	-56.38
4	14476.09	33.55 AV	54	-20.45	-66.63	4.92	-61.71
5	21397.1	42.72 PK	74	-31.28	-57.46	4.92	-52.54
6	21397.1	35.44 AV	54	-18.56	-64.74	4.92	-59.82
7	22229.4	43.64 PK	74	-30.36	-56.54	4.92	-51.62
8	22229.4	36.74 AV	54	-17.26	-63.44	4.92	-58.52
9	38798.84	37.61 PK	74	-36.39	-62.57	4.92	-57.65
10	38798.84	30.35 AV	54	-23.65	-69.83	4.92	-64.91

Note: Margin value = Emission Level - Limit value

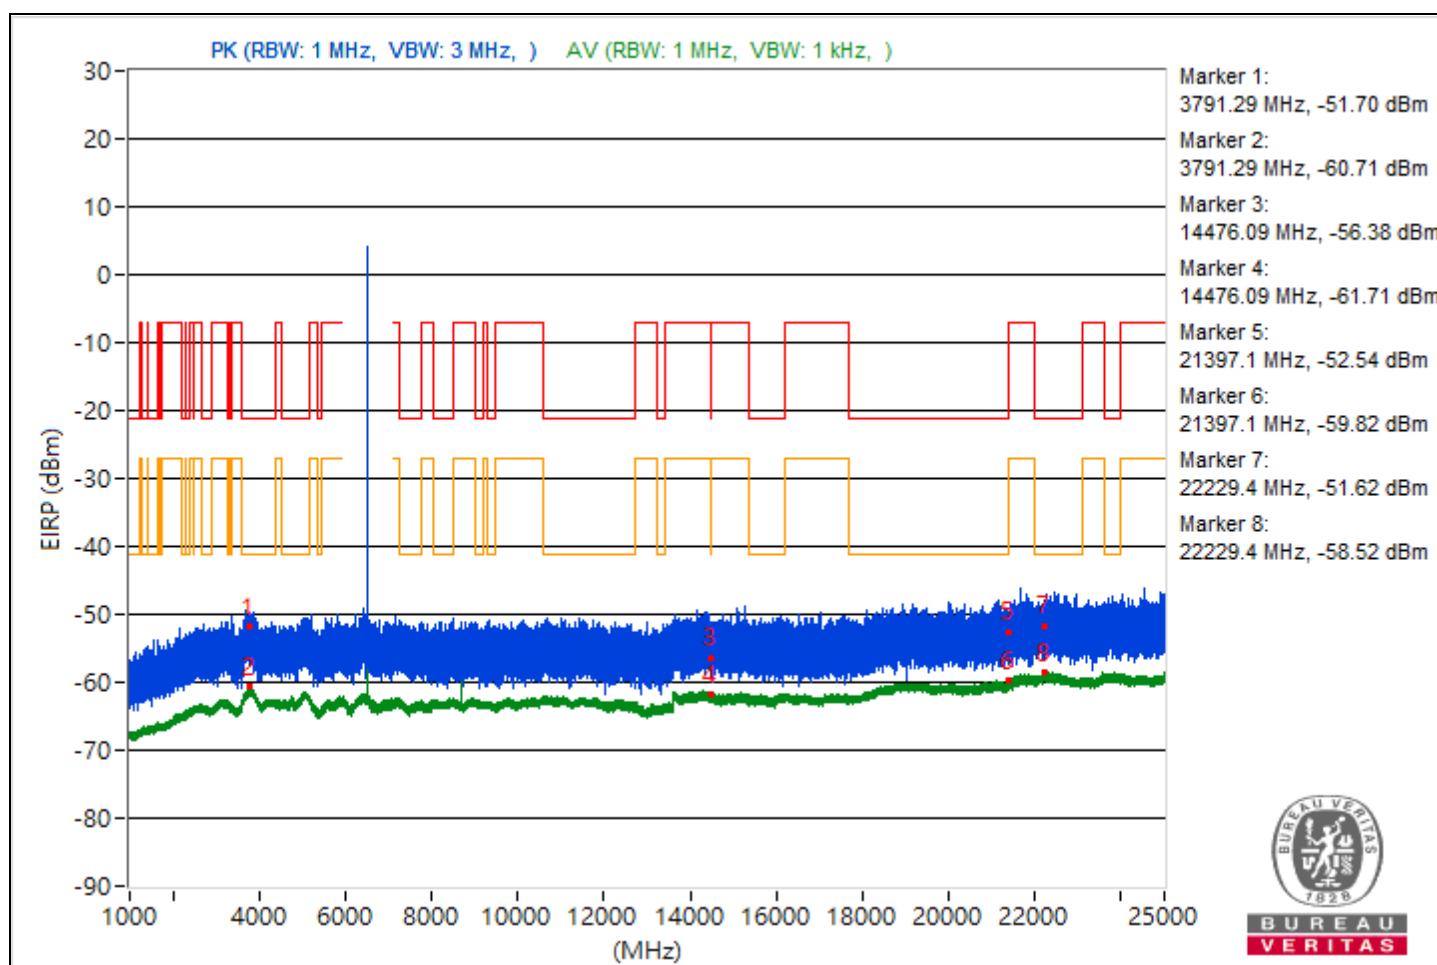

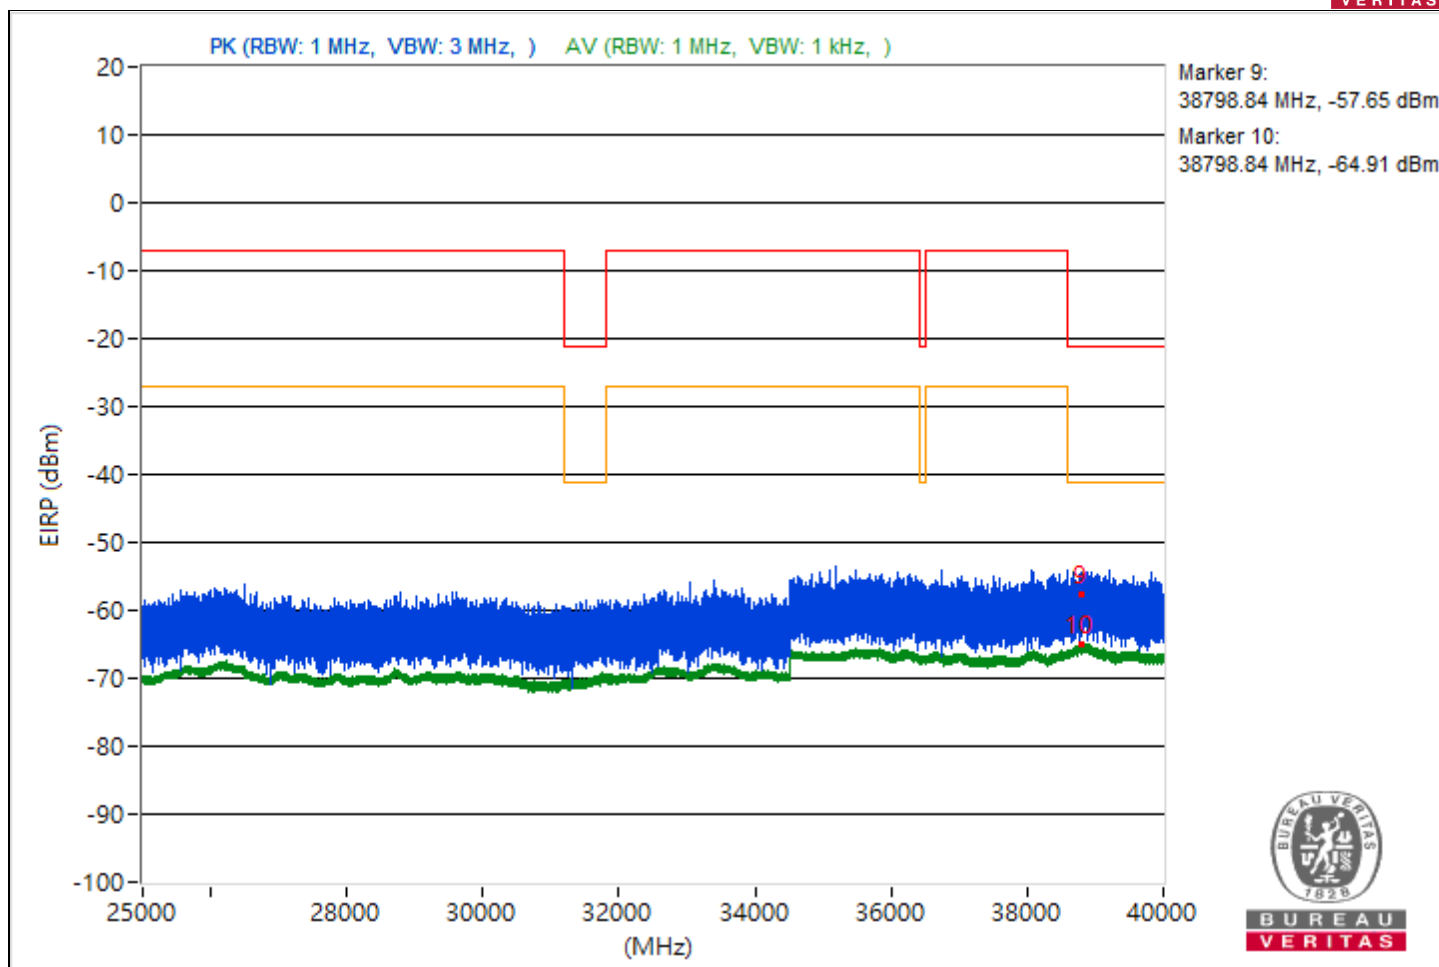



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.58	41.34 PK	74	-32.66	-58.84	4.92	-53.92
2	3803.58	34.56 AV	54	-19.44	-65.62	4.92	-60.7
3	14492.53	41.74 PK	74	-32.26	-58.44	4.92	-53.52
4	14492.53	33.52 AV	54	-20.48	-66.66	4.92	-61.74
5	21389.3	41.73 PK	74	-32.27	-58.45	4.92	-53.53
6	21389.3	35.46 AV	54	-18.54	-64.72	4.92	-59.8
7	23893.4	46.21 PK	74	-27.79	-53.97	4.92	-49.05
8	23893.4	36.79 AV	54	-17.21	-63.39	4.92	-58.47
9	38811.38	38.56 PK	74	-35.44	-61.62	4.92	-56.7
10	38811.38	30.6 AV	54	-23.4	-69.58	4.92	-64.66

Note: Margin value = Emission Level - Limit value

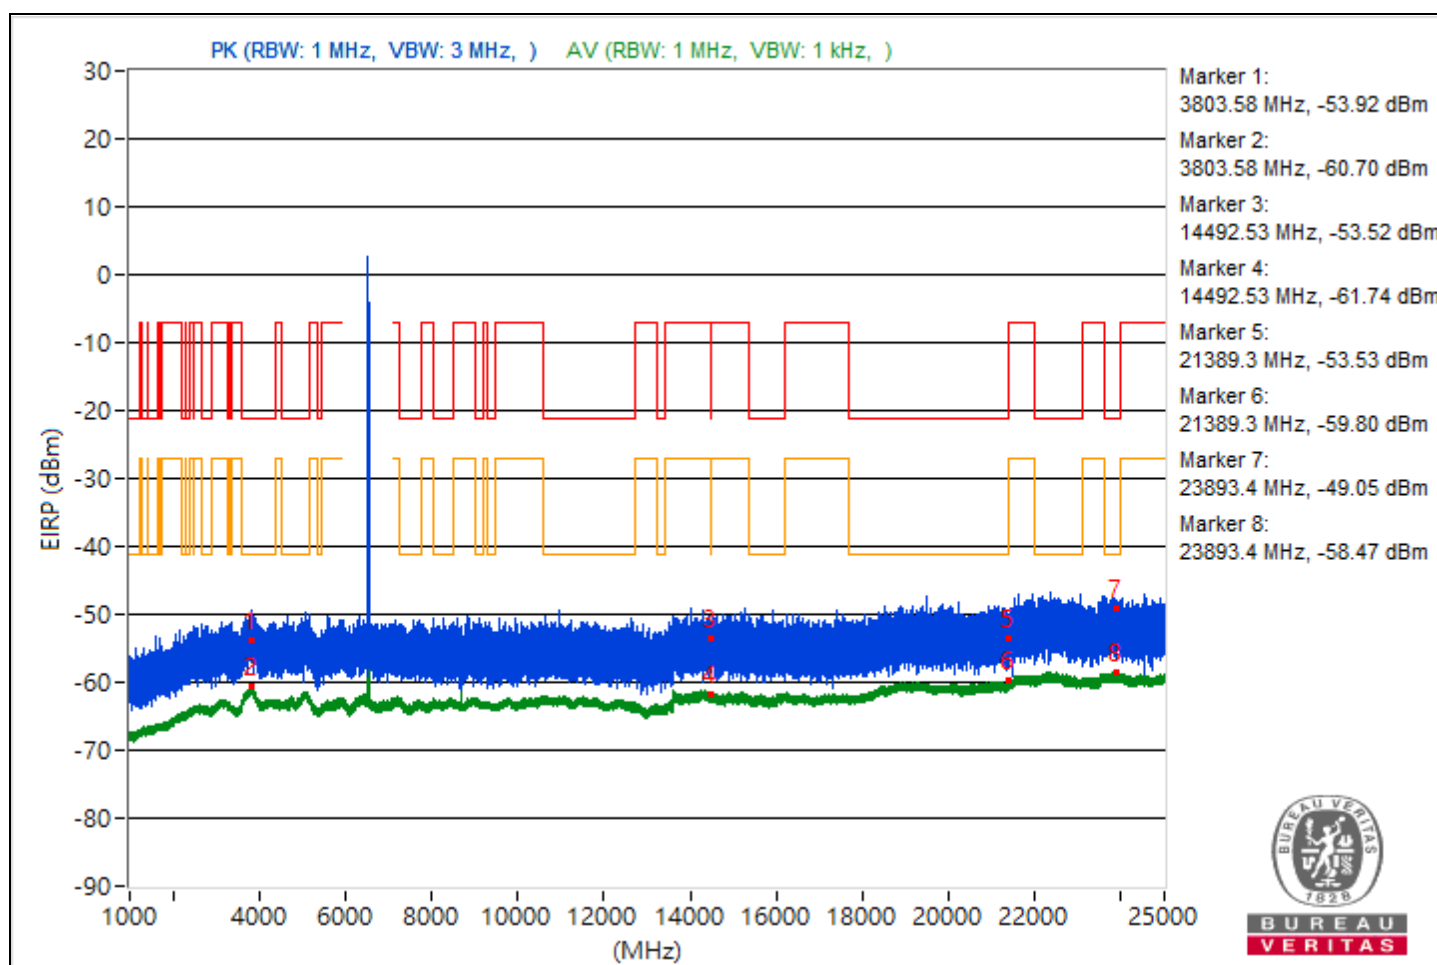


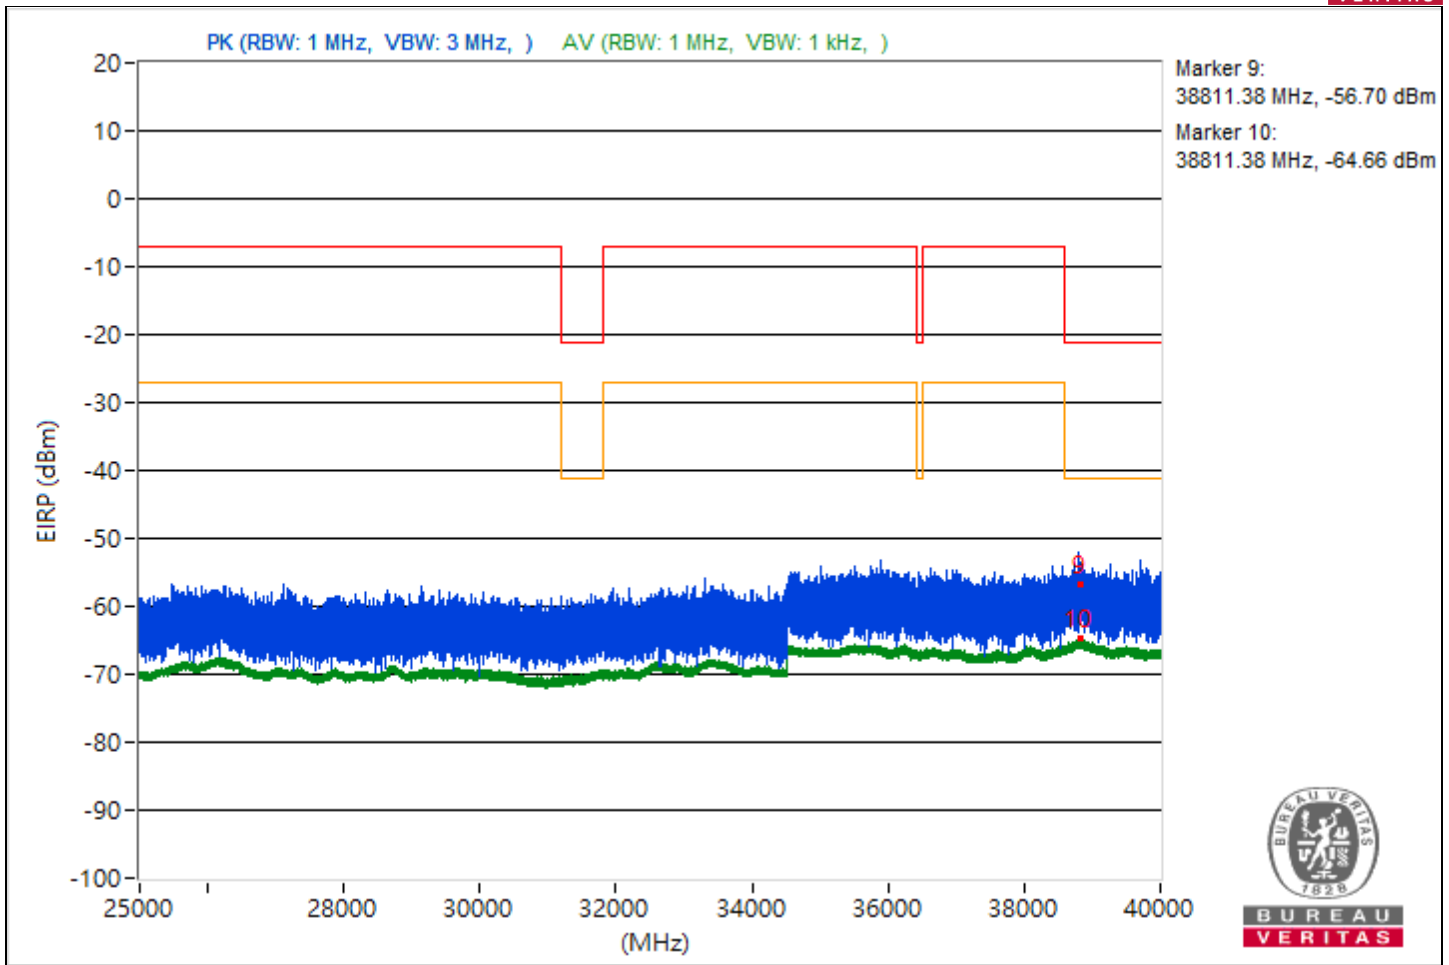


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.2	42.62 PK	74	-31.38	-57.56	4.92	-52.64
2	3825.2	34.43 AV	54	-19.57	-65.75	4.92	-60.83
3	9140.09	38.03 PK	74	-35.97	-62.15	4.92	-57.23
4	9140.09	33.74 AV	54	-20.26	-66.44	4.92	-61.52
5	21117.3	41.38 PK	74	-32.62	-58.8	4.92	-53.88
6	21117.3	35.42 AV	54	-18.58	-64.76	4.92	-59.84
7	22295.8	43.2 PK	74	-30.8	-56.98	4.92	-52.06
8	22295.8	36.69 AV	54	-17.31	-63.49	4.92	-58.57
9	38799.38	37.54 PK	74	-36.46	-62.64	4.92	-57.72
10	38799.38	30.4 AV	54	-23.6	-69.78	4.92	-64.86

Note: Margin value = Emission Level - Limit value

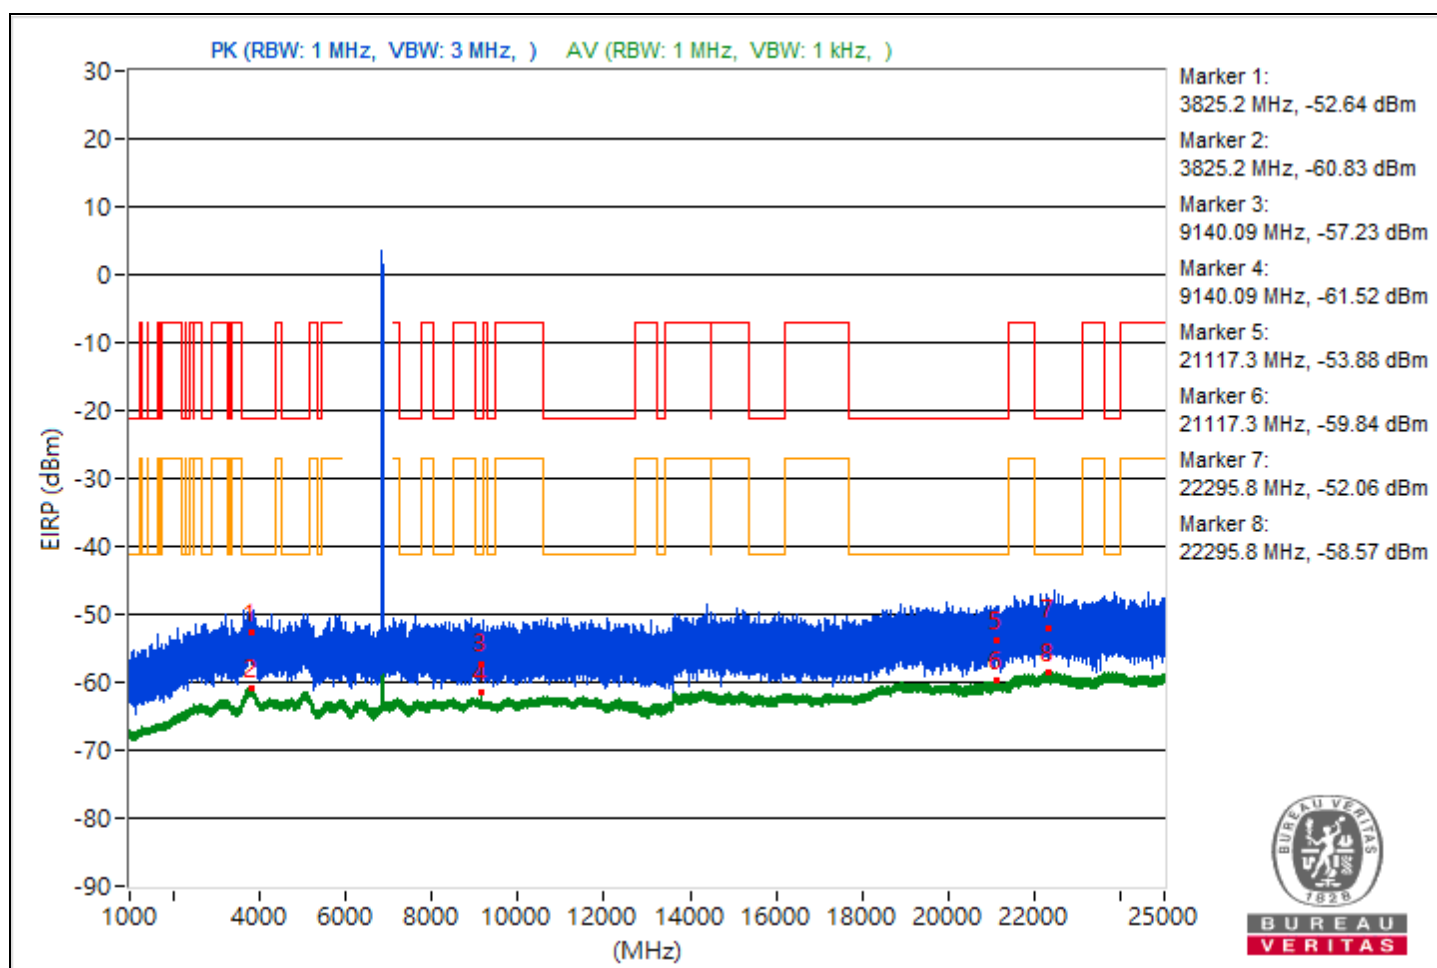

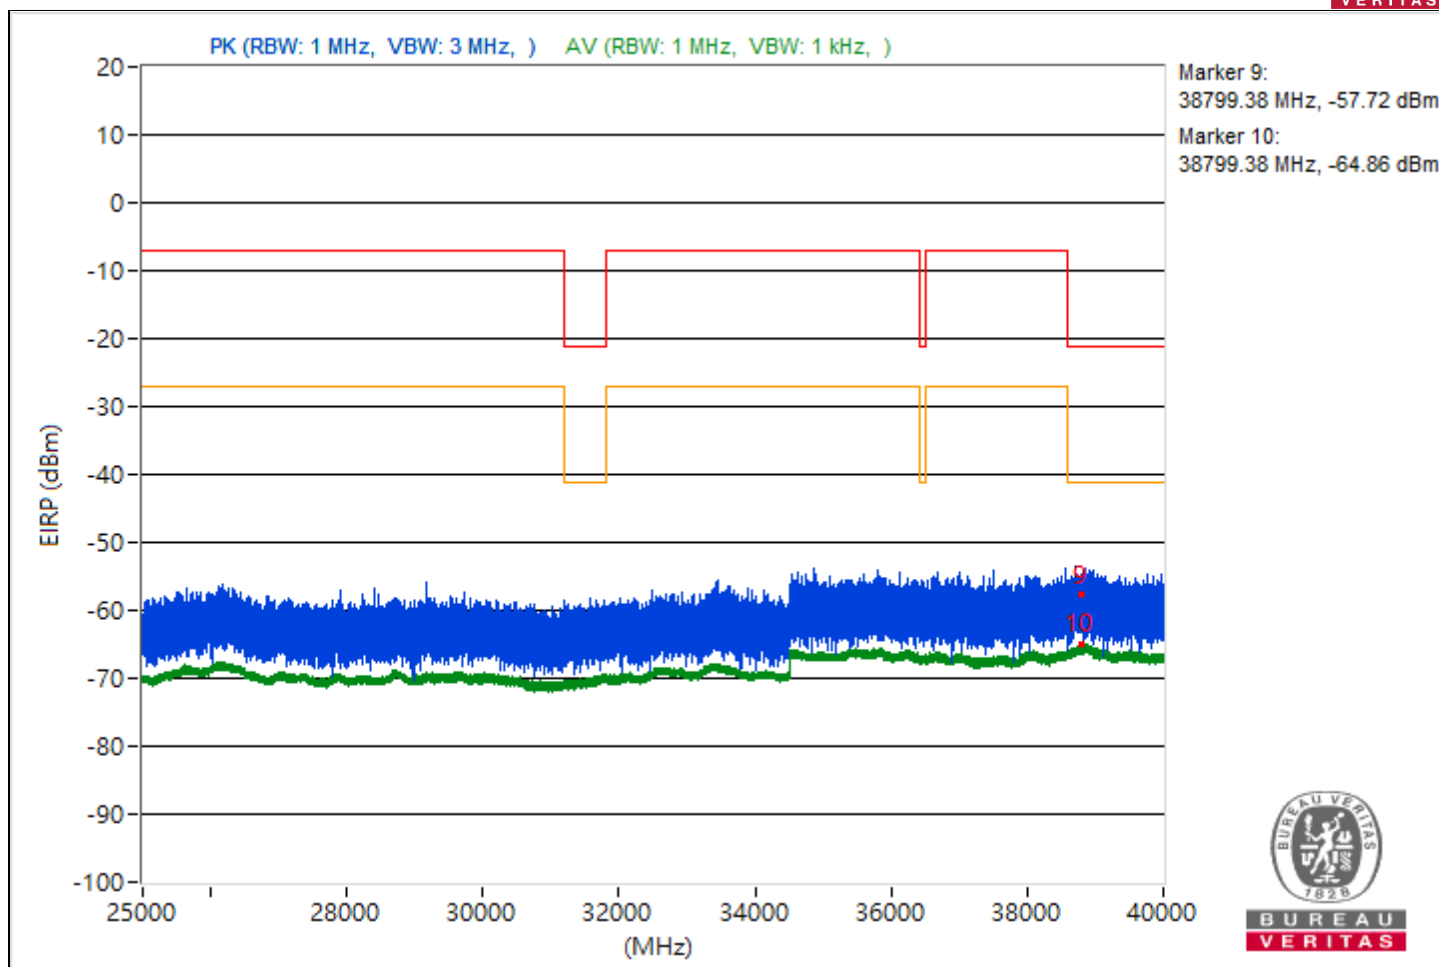



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.66	42.39 PK	74	-31.61	-57.79	4.92	-52.87
2	3810.66	34.45 AV	54	-19.55	-65.73	4.92	-60.81
3	7276.2	40.04 PK	74	-33.96	-60.14	4.92	-55.22
4	7276.2	33.64 AV	54	-20.36	-66.54	4.92	-61.62
5	21166.3	40.71 PK	74	-33.29	-59.47	4.92	-54.55
6	21166.3	35.36 AV	54	-18.64	-64.82	4.92	-59.9
7	23847.2	42.26 PK	74	-31.74	-57.92	4.92	-53
8	23847.2	36.65 AV	54	-17.35	-63.53	4.92	-58.61
9	38830.31	37.2 PK	74	-36.8	-62.98	4.92	-58.06
10	38830.31	30.42 AV	54	-23.58	-69.76	4.92	-64.84

Note: Margin value = Emission Level - Limit value

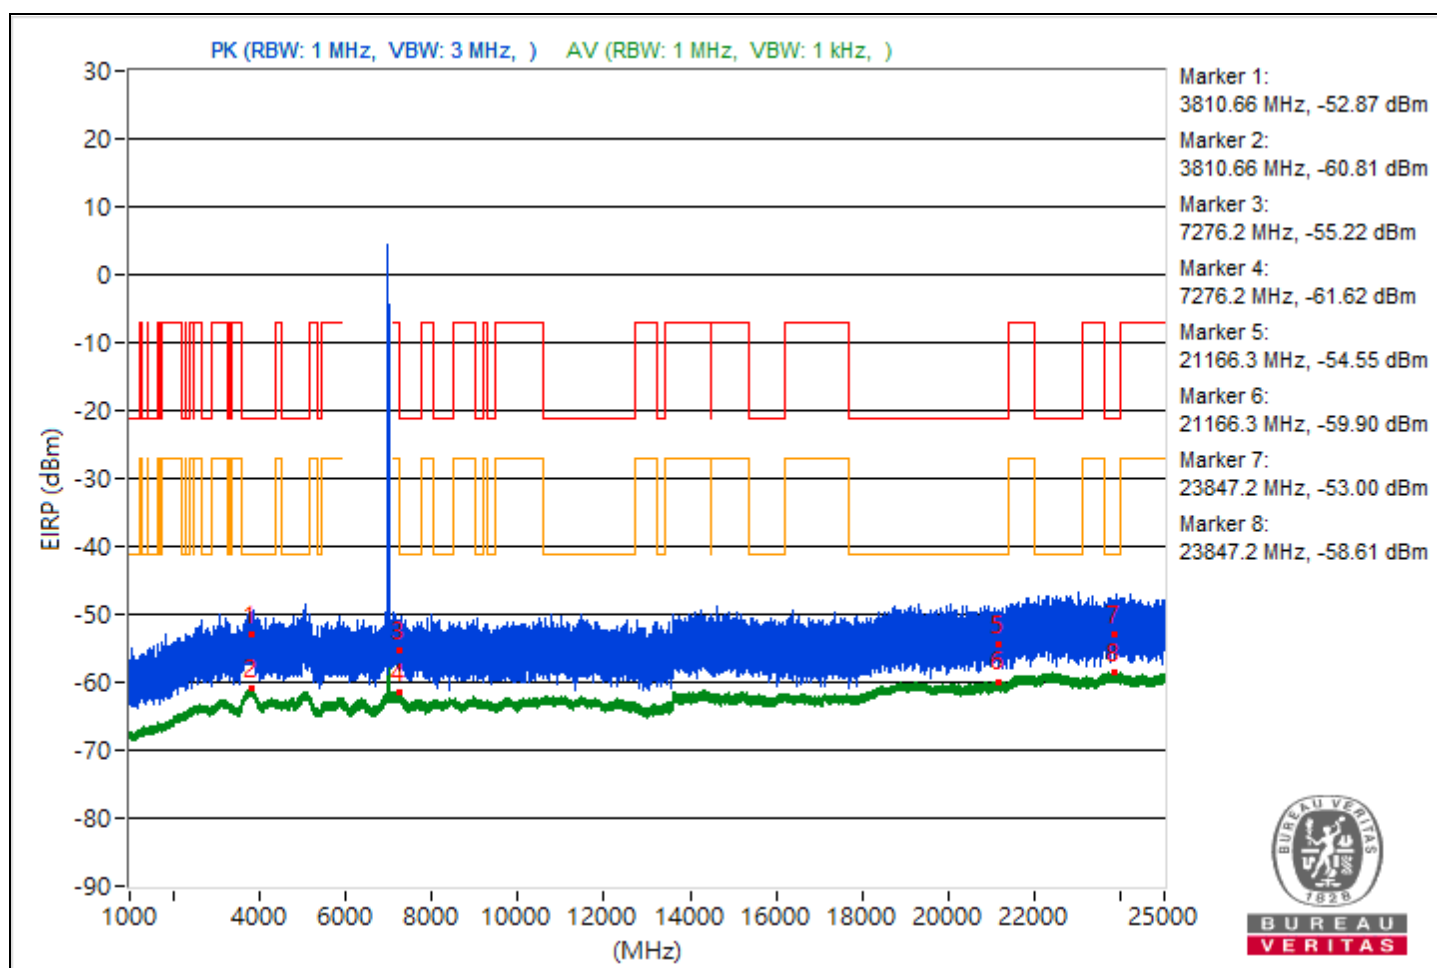


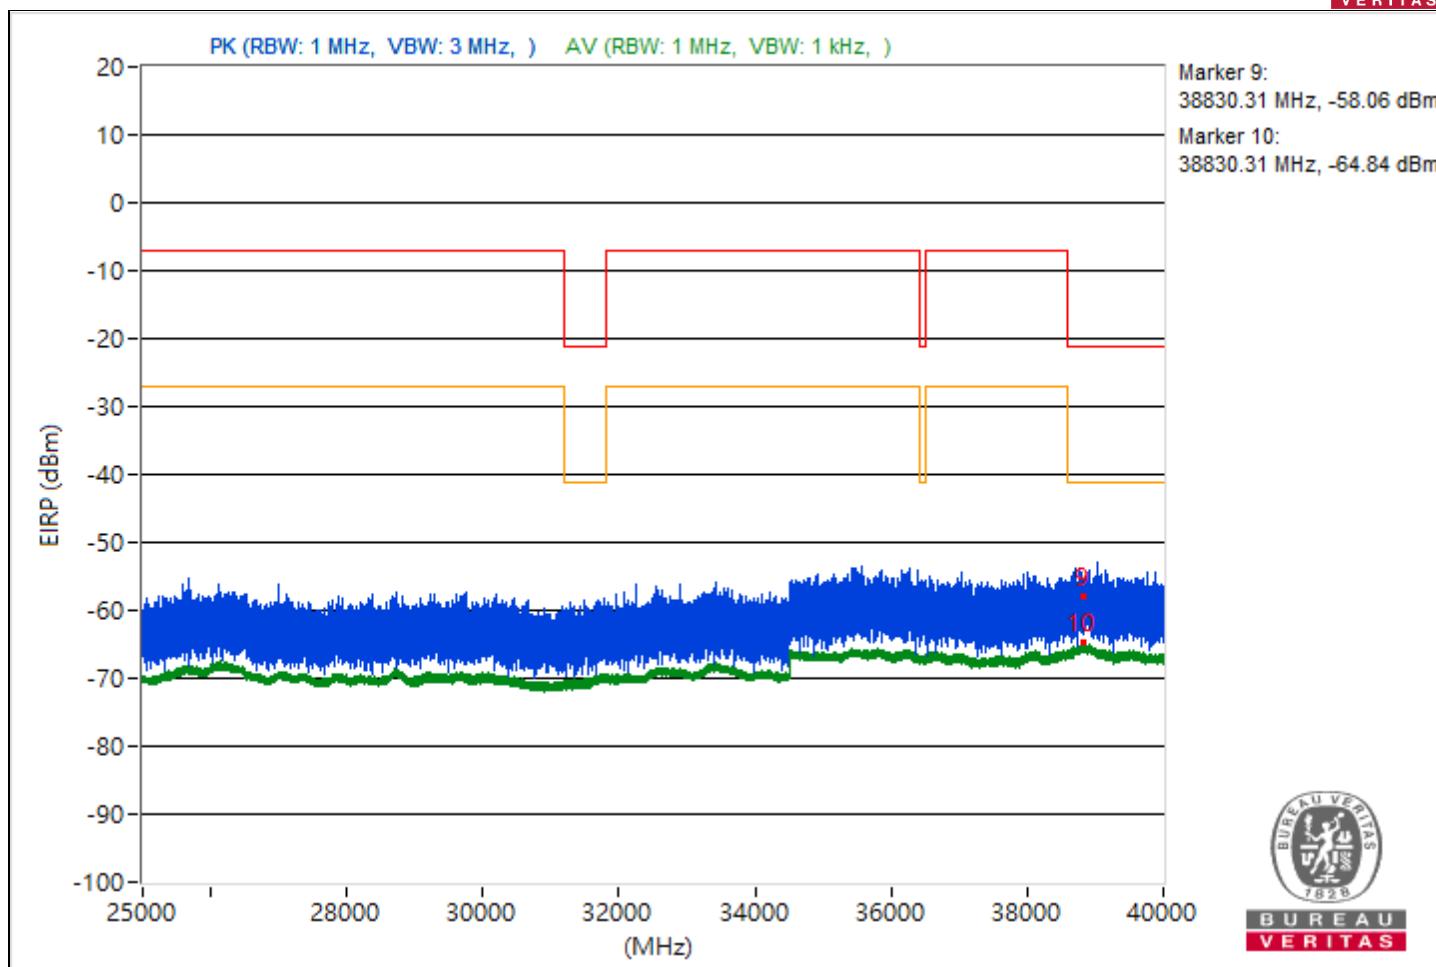


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.11	40.32 PK	74	-33.68	-59.86	4.92	-54.94
2	3817.11	34.53 AV	54	-19.47	-65.65	4.92	-60.73
3	7280.87	41.34 PK	74	-32.66	-58.84	4.92	-53.92
4	7280.87	34.23 AV	54	-19.77	-65.95	4.92	-61.03
5	21150.1	42.23 PK	74	-31.77	-57.95	4.92	-53.03
6	21150.1	35.45 AV	54	-18.55	-64.73	4.92	-59.81
7	22232.1	44.27 PK	74	-29.73	-55.91	4.92	-50.99
8	22232.1	36.61 AV	54	-17.39	-63.57	4.92	-58.65
9	38807.82	37.42 PK	74	-36.58	-62.76	4.92	-57.84
10	38807.82	30.56 AV	54	-23.44	-69.62	4.92	-64.7

Note: Margin value = Emission Level - Limit value

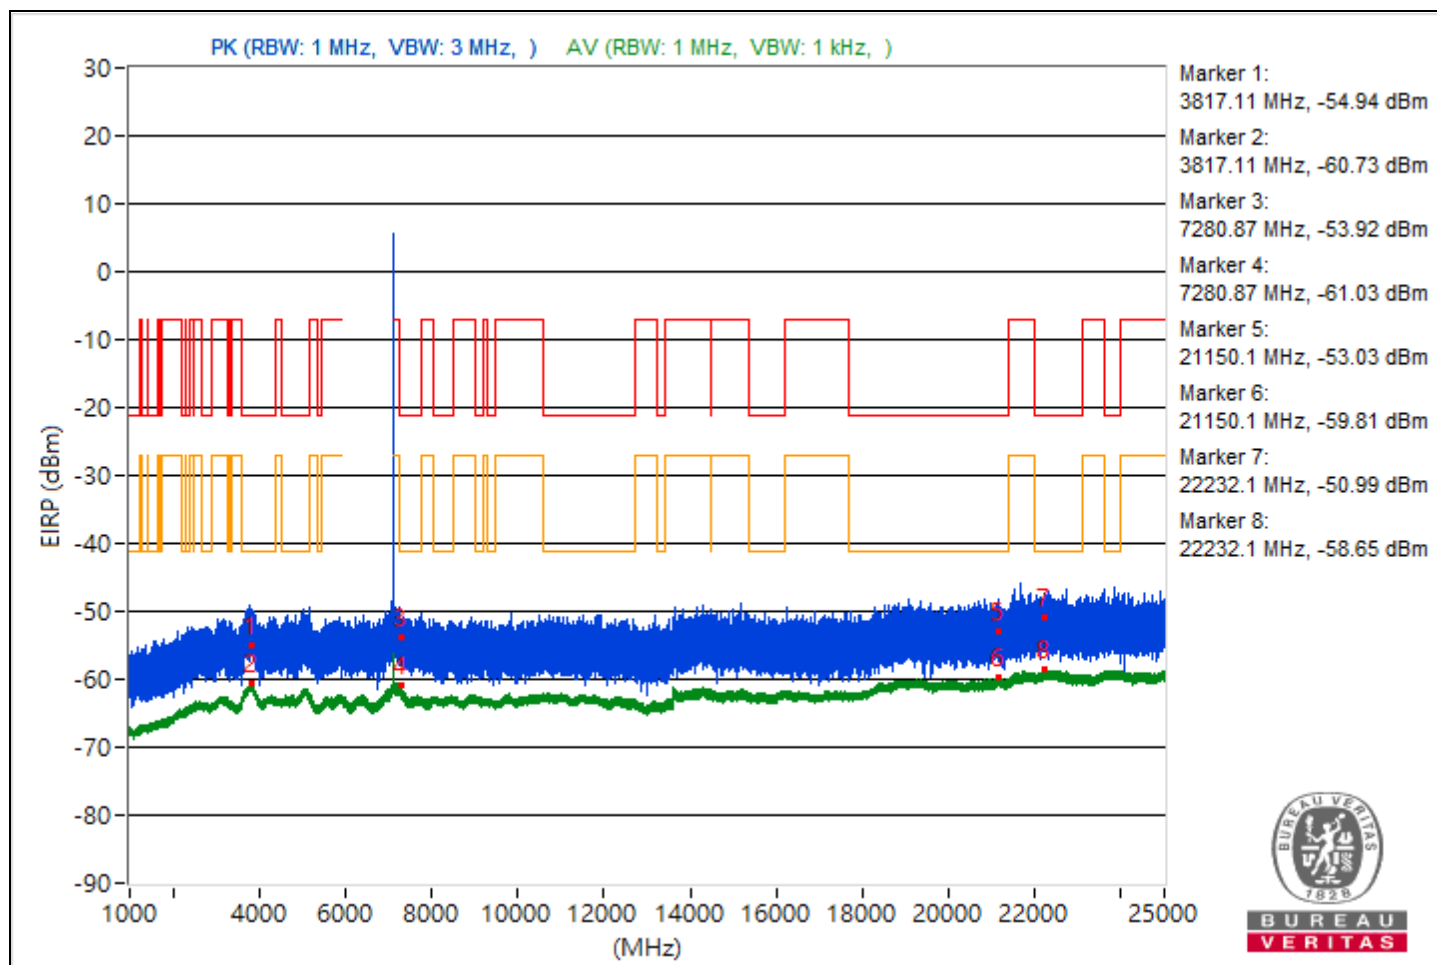

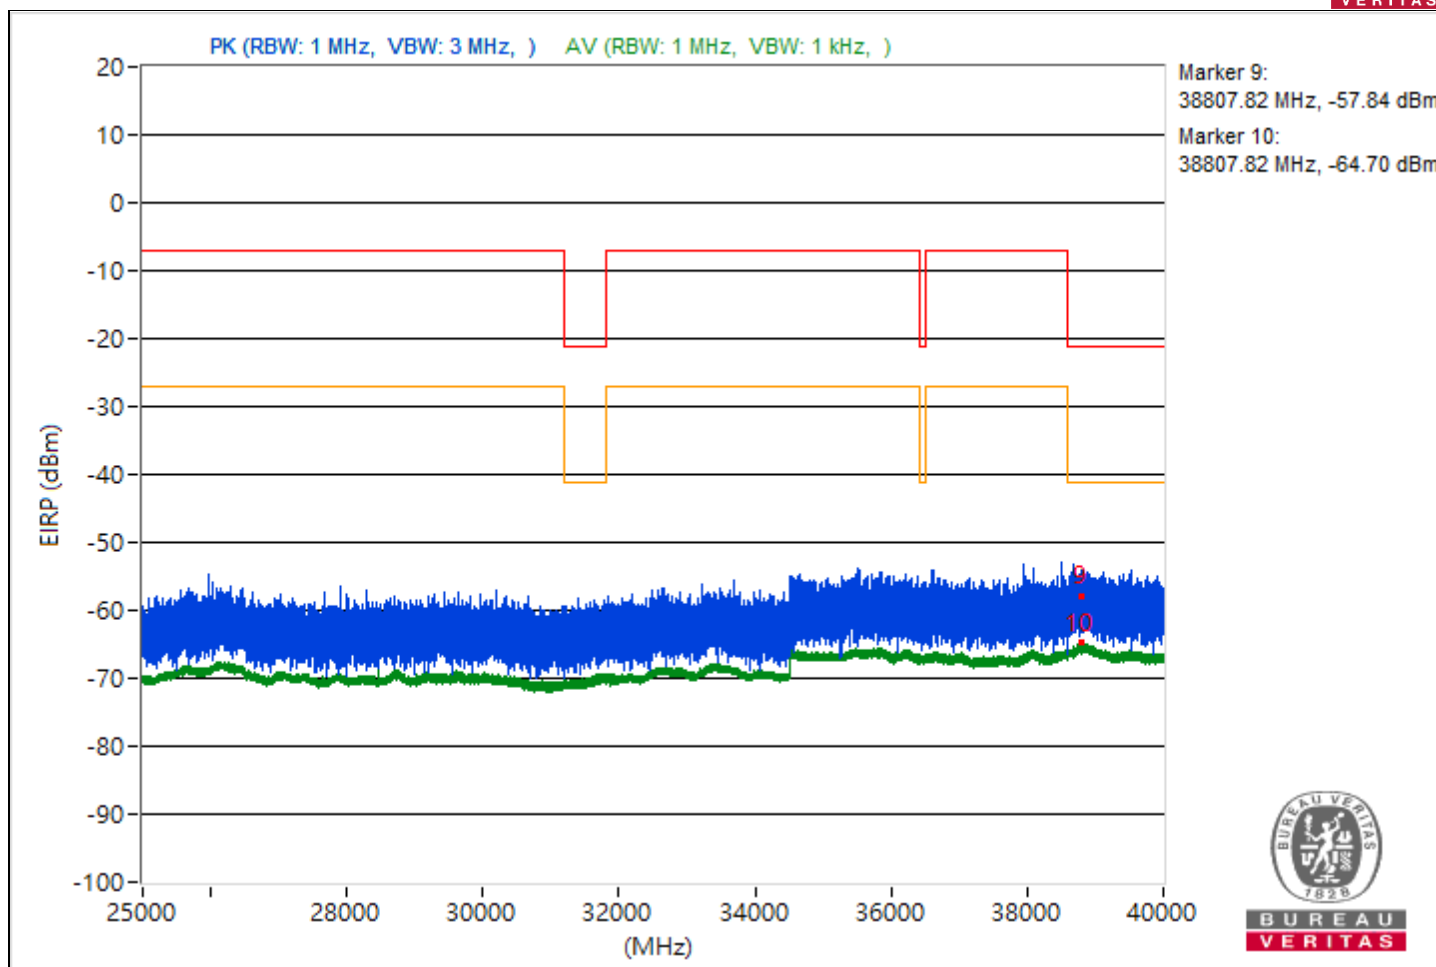



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.92	42.46 PK	74	-31.54	-57.72	4.92	-52.8
2	3813.92	34.38 AV	54	-19.62	-65.8	4.92	-60.88
3	14493.69	38.47 PK	74	-35.53	-61.71	4.92	-56.79
4	14493.69	33.81 AV	54	-20.19	-66.37	4.92	-61.45
5	21125.8	42.95 PK	74	-31.05	-57.23	4.92	-52.31
6	21125.8	35.57 AV	54	-18.43	-64.61	4.92	-59.69
7	23797.9	40.55 PK	74	-33.45	-59.63	4.92	-54.71
8	23797.9	36.59 AV	54	-17.41	-63.59	4.92	-58.67
9	38859.38	37.72 PK	74	-36.28	-62.46	4.92	-57.54
10	38859.38	30.33 AV	54	-23.67	-69.85	4.92	-64.93

Note: Margin value = Emission Level - Limit value

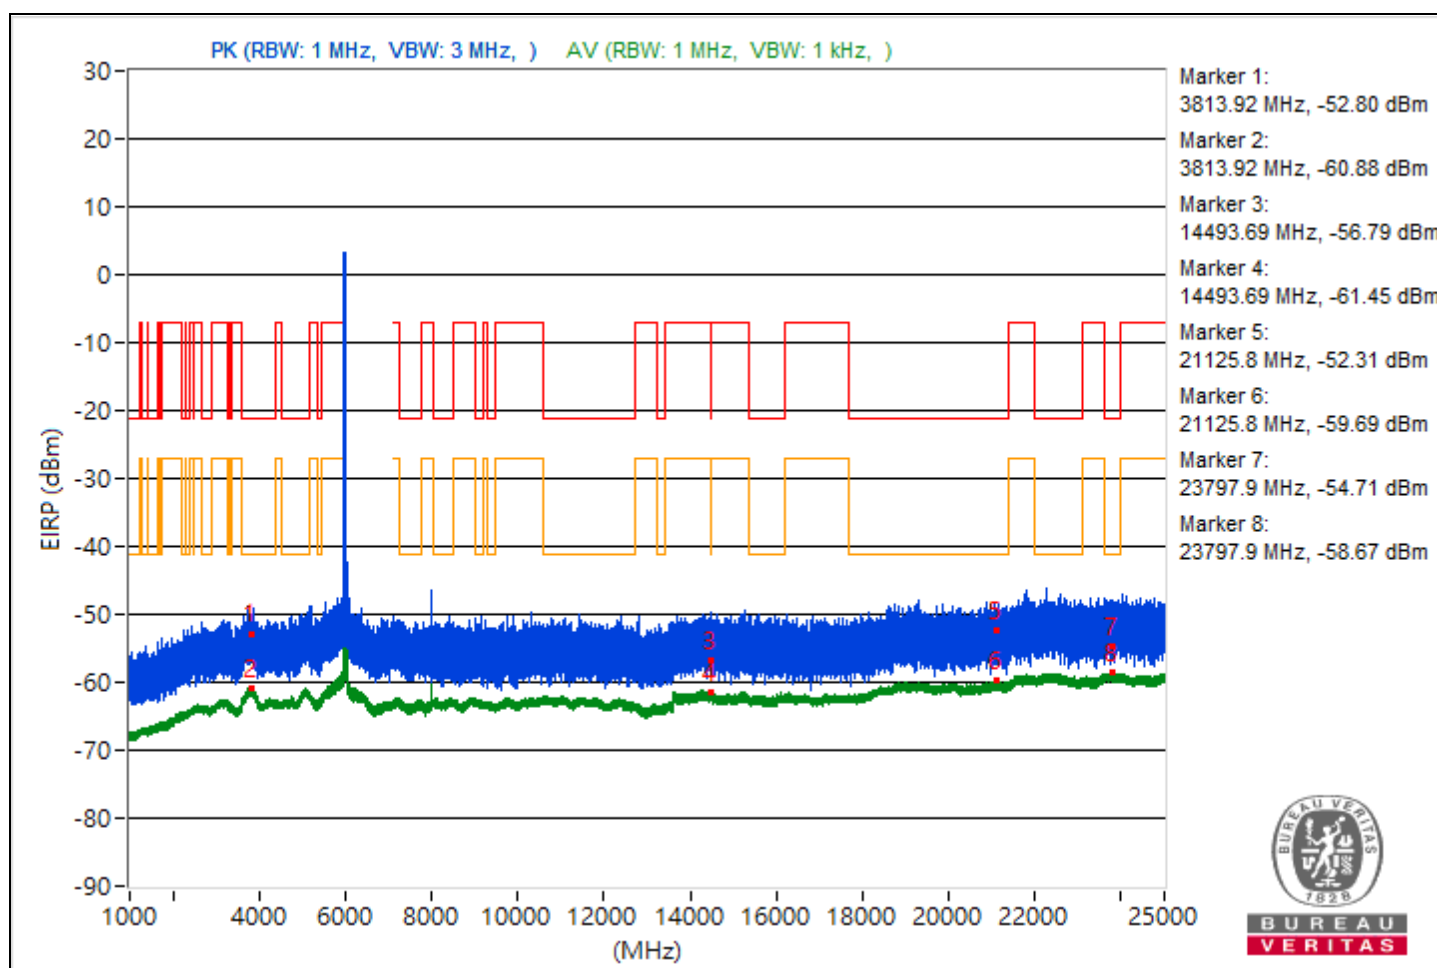


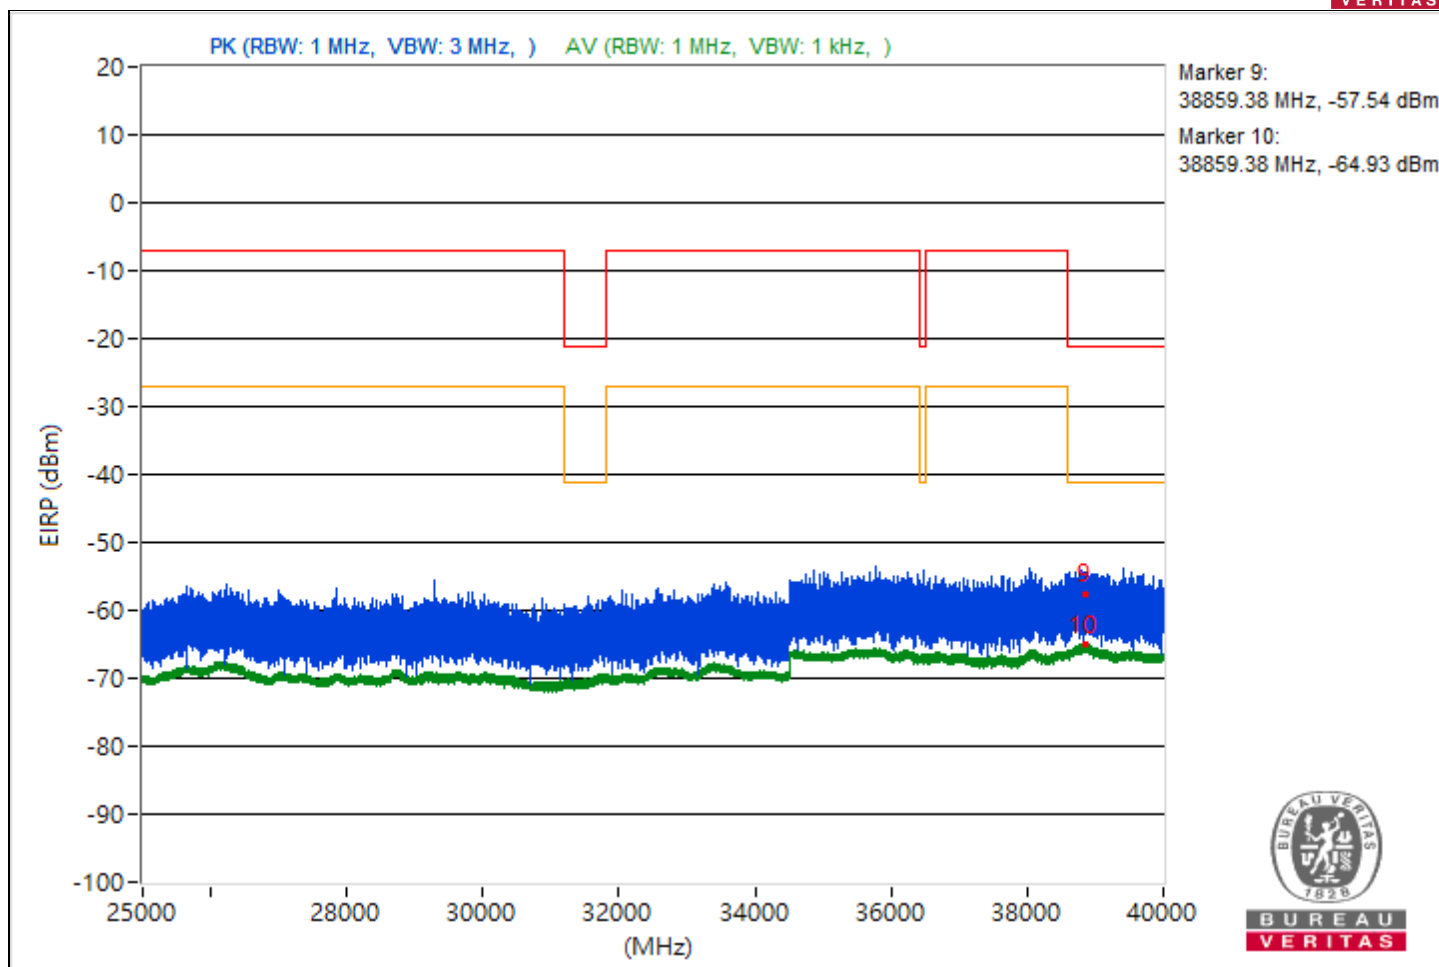


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.14	40.46 PK	74	-33.54	-59.72	4.92	-54.8
2	3820.14	34.55 AV	54	-19.45	-65.63	4.92	-60.71
3	14478.49	41.78 PK	74	-32.22	-58.4	4.92	-53.48
4	14478.49	33.76 AV	54	-20.24	-66.42	4.92	-61.5
5	21133.3	41.53 PK	74	-32.47	-58.65	4.92	-53.73
6	21133.3	35.5 AV	54	-18.5	-64.68	4.92	-59.76
7	22256.7	41.88 PK	74	-32.12	-58.3	4.92	-53.38
8	22256.7	36.71 AV	54	-17.29	-63.47	4.92	-58.55
9	38836.53	37.44 PK	74	-36.56	-62.74	4.92	-57.82
10	38836.53	30.44 AV	54	-23.56	-69.74	4.92	-64.82

Note: Margin value = Emission Level - Limit value

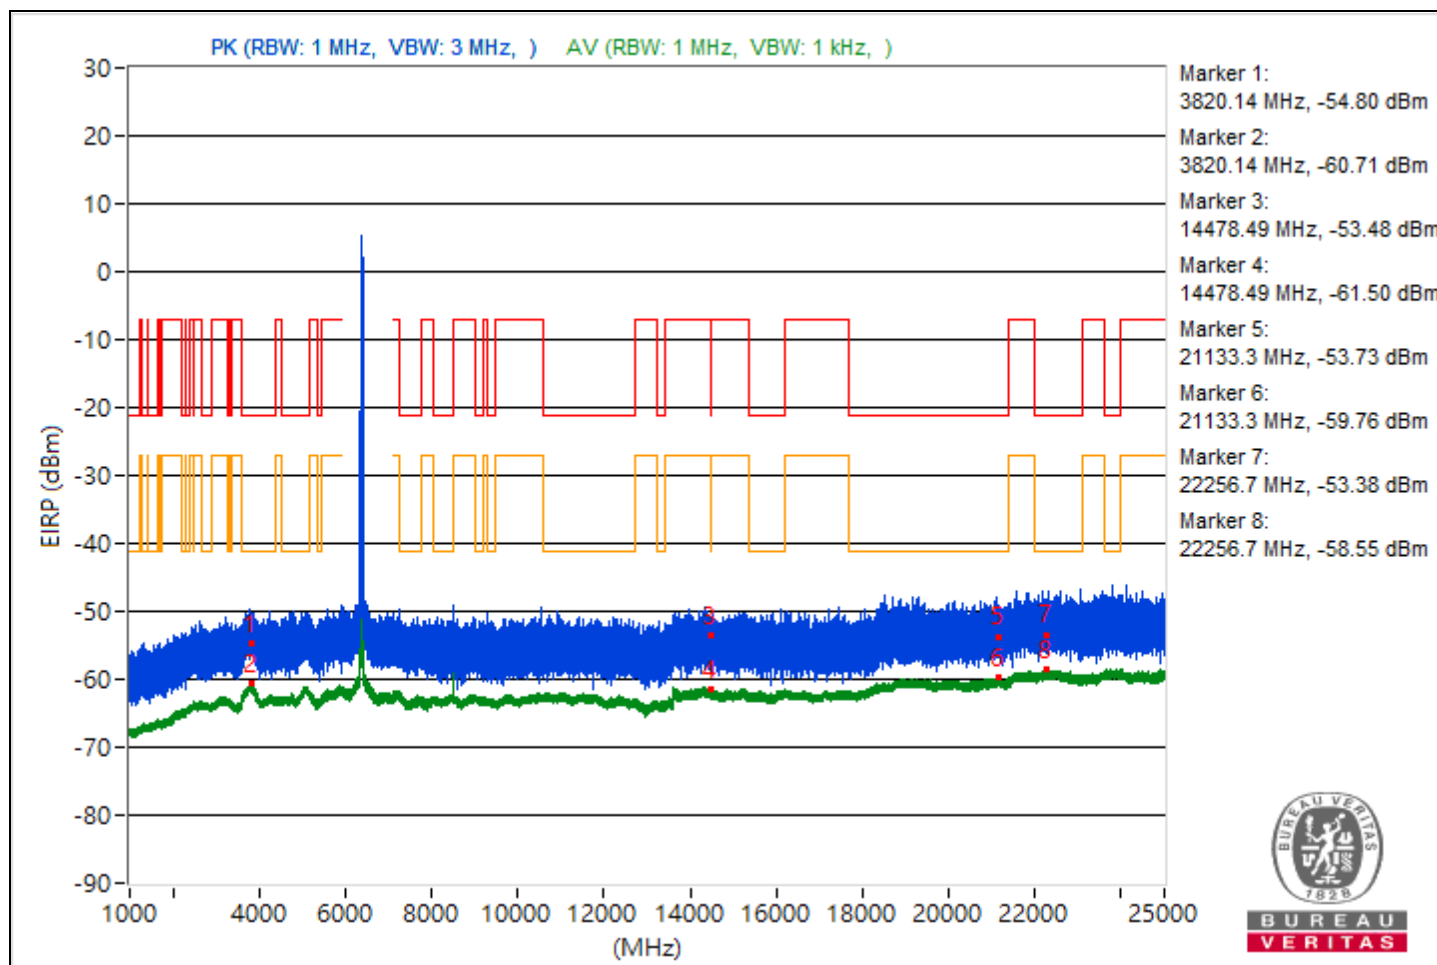

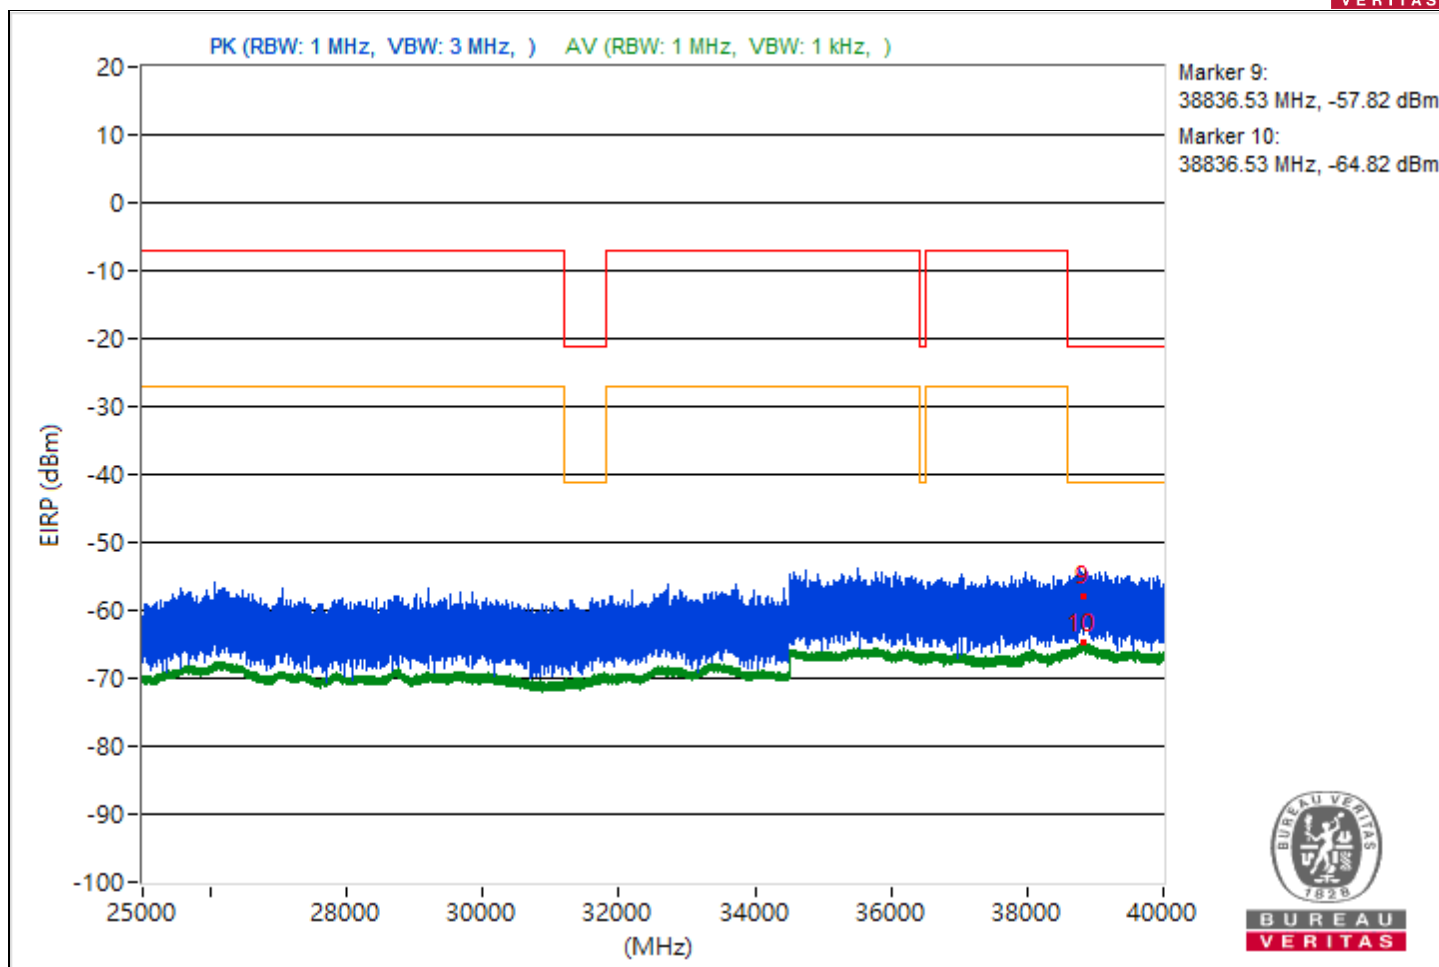



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.19	40.57 PK	74	-33.43	-59.61	4.92	-54.69
2	3803.19	34.59 AV	54	-19.41	-65.59	4.92	-60.67
3	14475.29	38.99 PK	74	-35.01	-61.19	4.92	-56.27
4	14475.29	33.72 AV	54	-20.28	-66.46	4.92	-61.54
5	21261.4	44.64 PK	74	-29.36	-55.54	4.92	-50.62
6	21261.4	35.46 AV	54	-18.54	-64.72	4.92	-59.8
7	23899.1	44.51 PK	74	-29.49	-55.67	4.92	-50.75
8	23899.1	36.76 AV	54	-17.24	-63.42	4.92	-58.5
9	38840.71	37.16 PK	74	-36.84	-63.02	4.92	-58.1
10	38840.71	30.39 AV	54	-23.61	-69.79	4.92	-64.87

Note: Margin value = Emission Level - Limit value

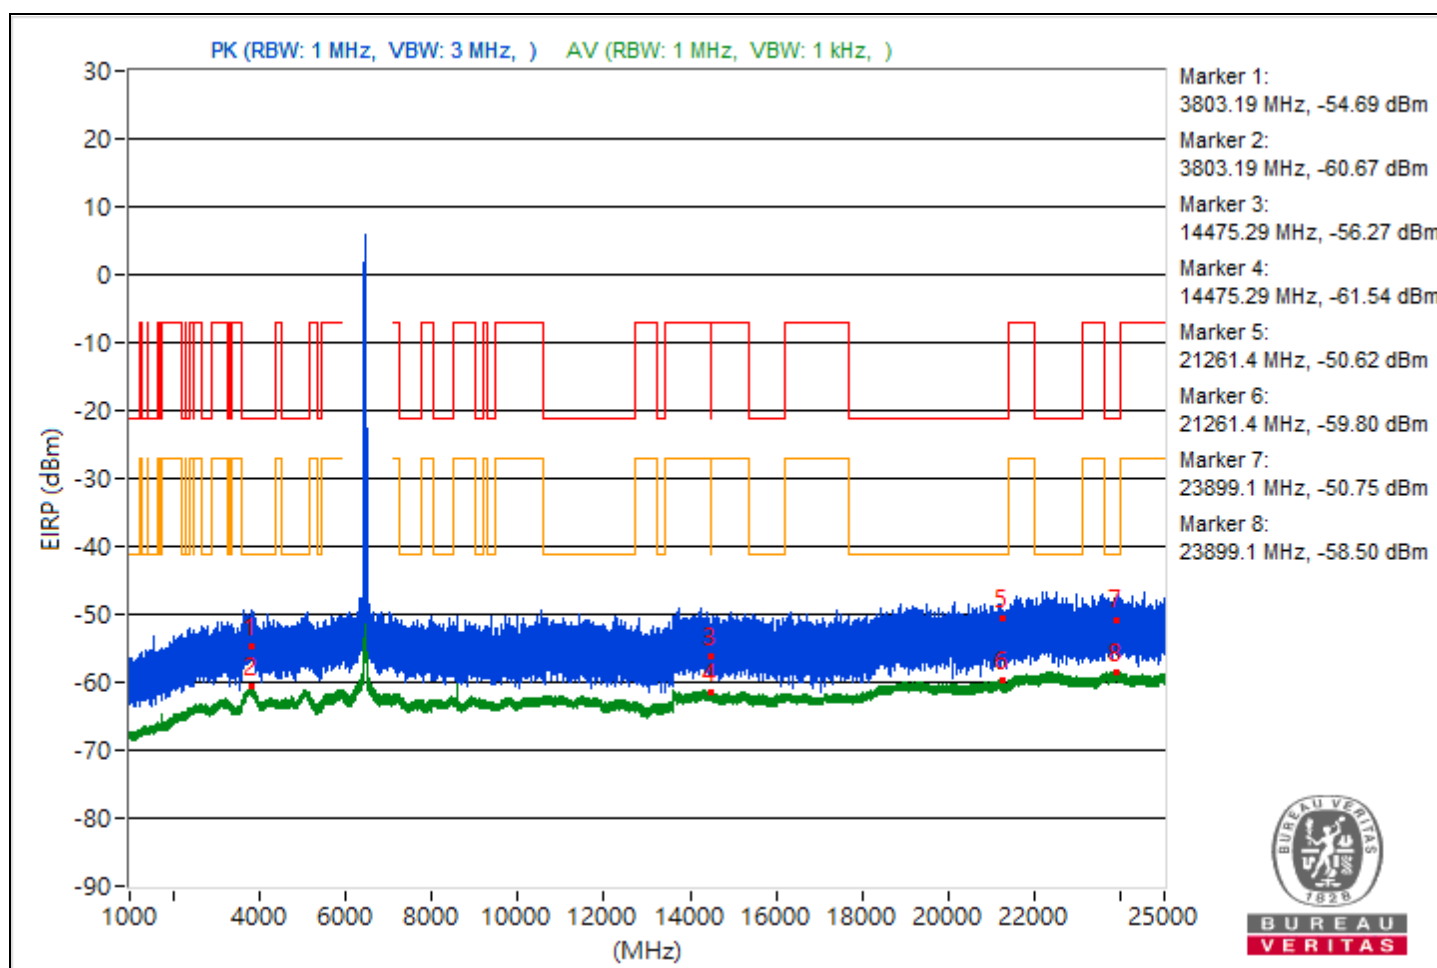

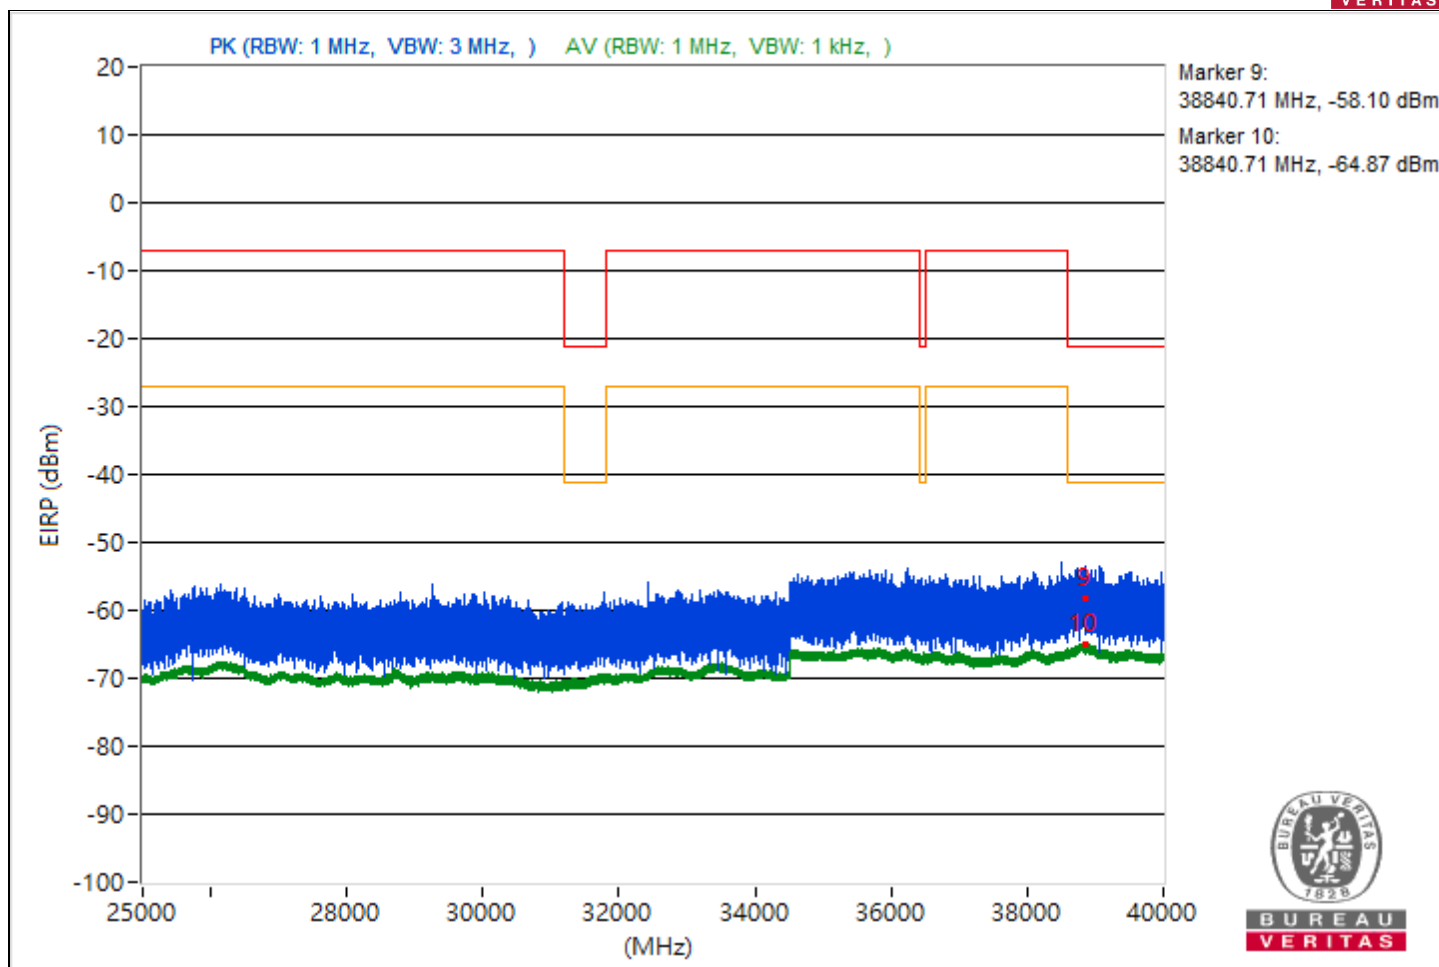



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3781.41	41.5 PK	74	-32.5	-58.68	4.92	-53.76
2	3781.41	34.61 AV	54	-19.39	-65.57	4.92	-60.65
3	14475.56	42.72 PK	74	-31.28	-57.46	4.92	-52.54
4	14475.56	33.78 AV	54	-20.22	-66.4	4.92	-61.48
5	21117.9	43 PK	74	-31	-57.18	4.92	-52.26
6	21117.9	35.4 AV	54	-18.6	-64.78	4.92	-59.86
7	23974.3	42.52 PK	74	-31.48	-57.66	4.92	-52.74
8	23974.3	36.79 AV	54	-17.21	-63.39	4.92	-58.47
9	38822.84	38.81 PK	74	-35.19	-61.37	4.92	-56.45
10	38822.84	30.46 AV	54	-23.54	-69.72	4.92	-64.8

Note: Margin value = Emission Level - Limit value

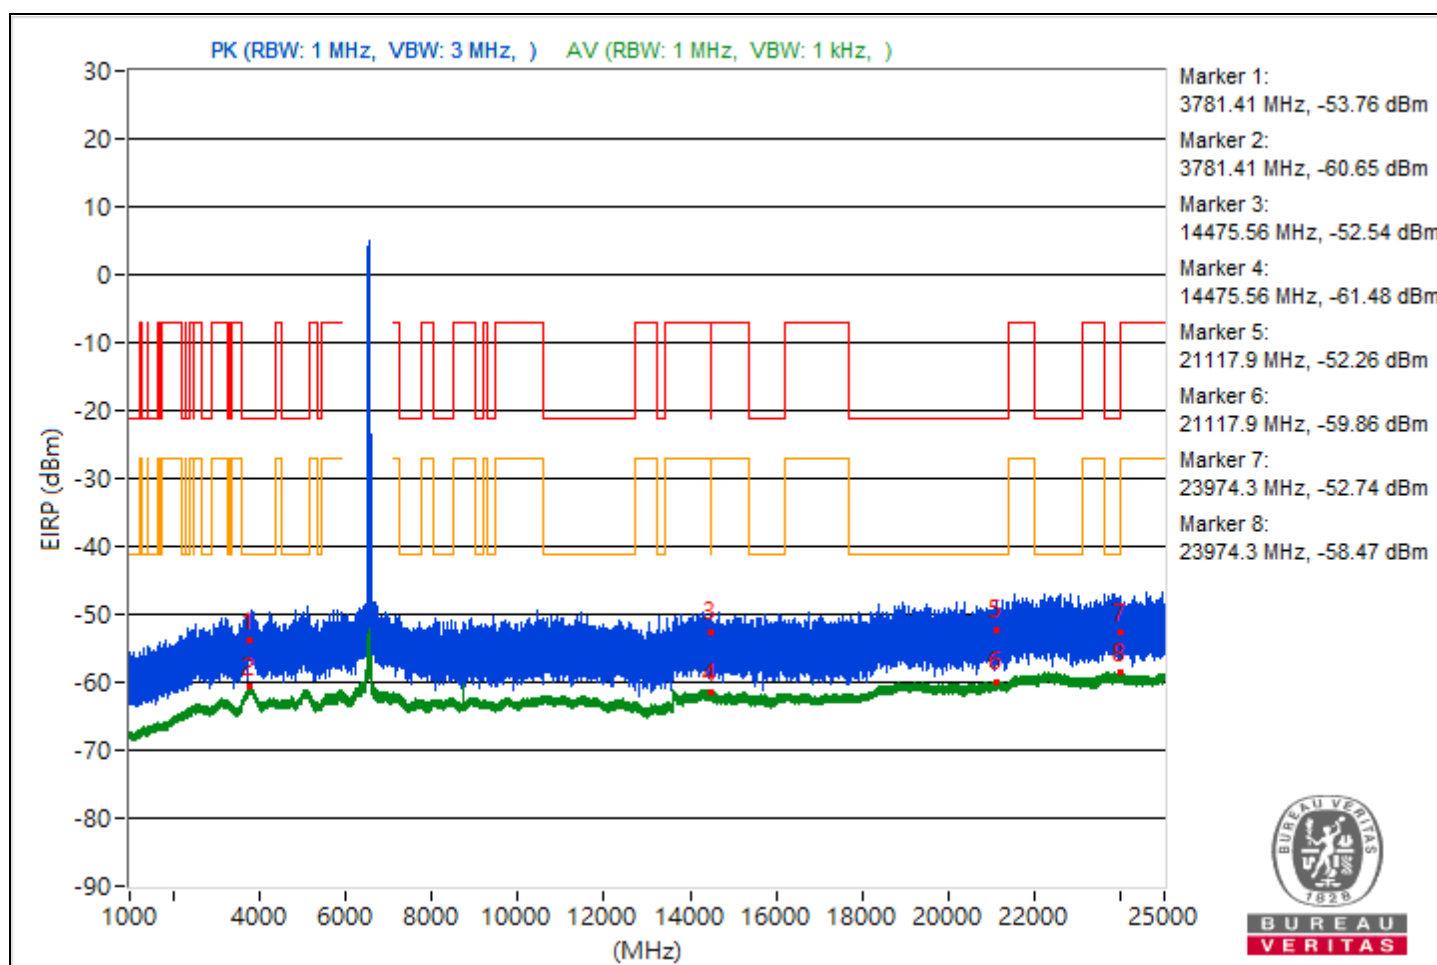

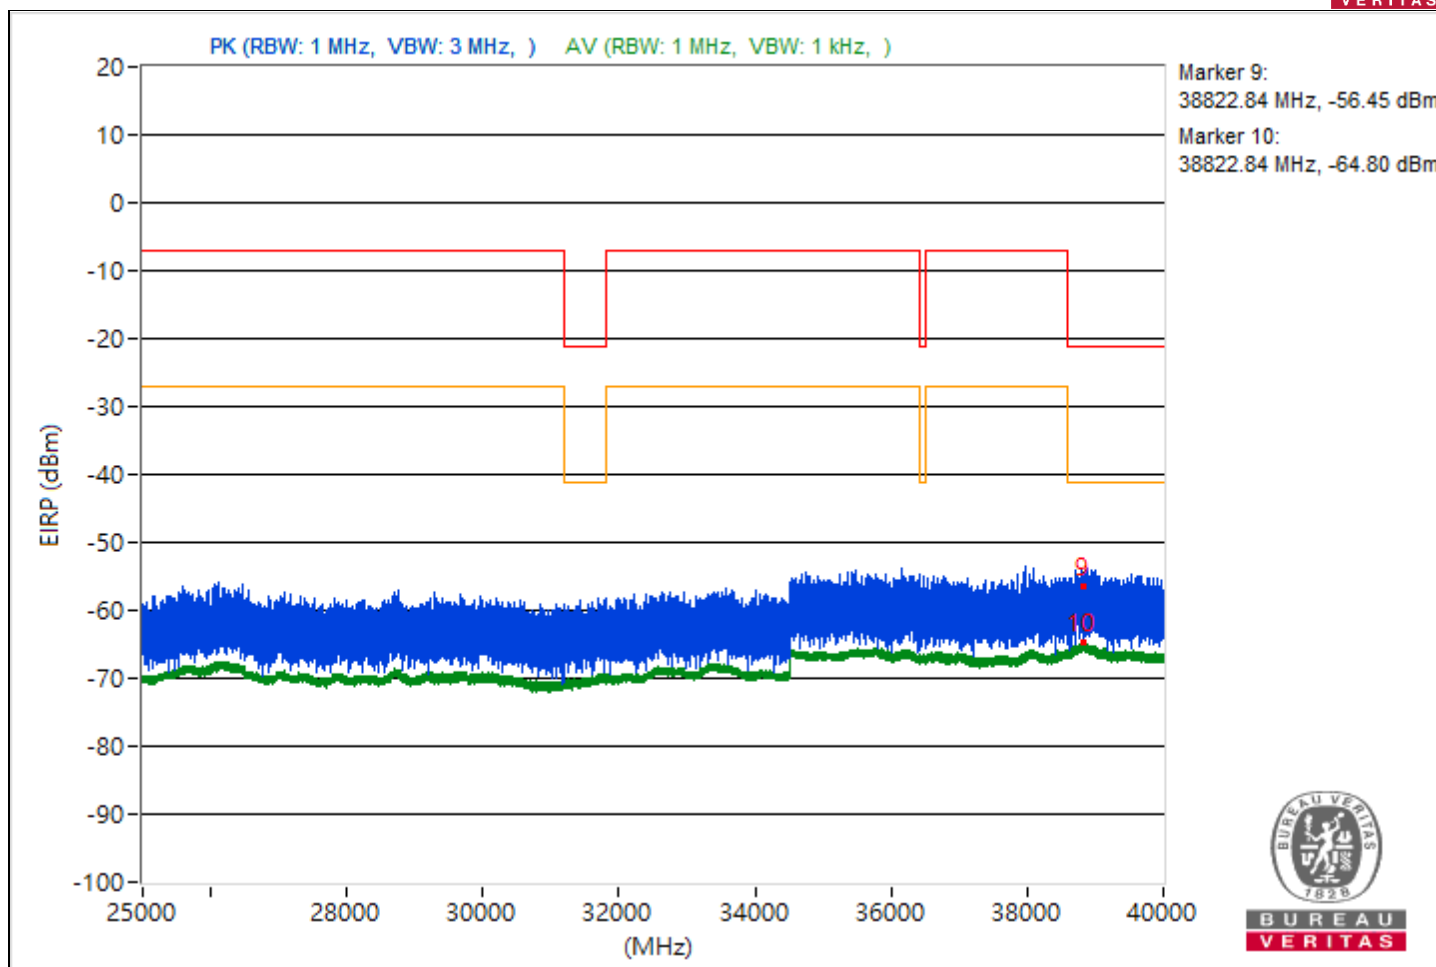



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.66	42.14 PK	74	-31.86	-58.04	4.92	-53.12
2	3817.66	34.54 AV	54	-19.46	-65.64	4.92	-60.72
3	7275.73	42.73 PK	74	-31.27	-57.45	4.92	-52.53
4	7275.73	34.2 AV	54	-19.8	-65.98	4.92	-61.06
5	21155.7	42.45 PK	74	-31.55	-57.73	4.92	-52.81
6	21155.7	35.49 AV	54	-18.51	-64.69	4.92	-59.77
7	23629.7	41.56 PK	74	-32.44	-58.62	4.92	-53.7
8	23629.7	36.81 AV	54	-17.19	-63.37	4.92	-58.45
9	38812.8	37.84 PK	74	-36.16	-62.34	4.92	-57.42
10	38812.8	30.36 AV	54	-23.64	-69.82	4.92	-64.9

Note: Margin value = Emission Level - Limit value

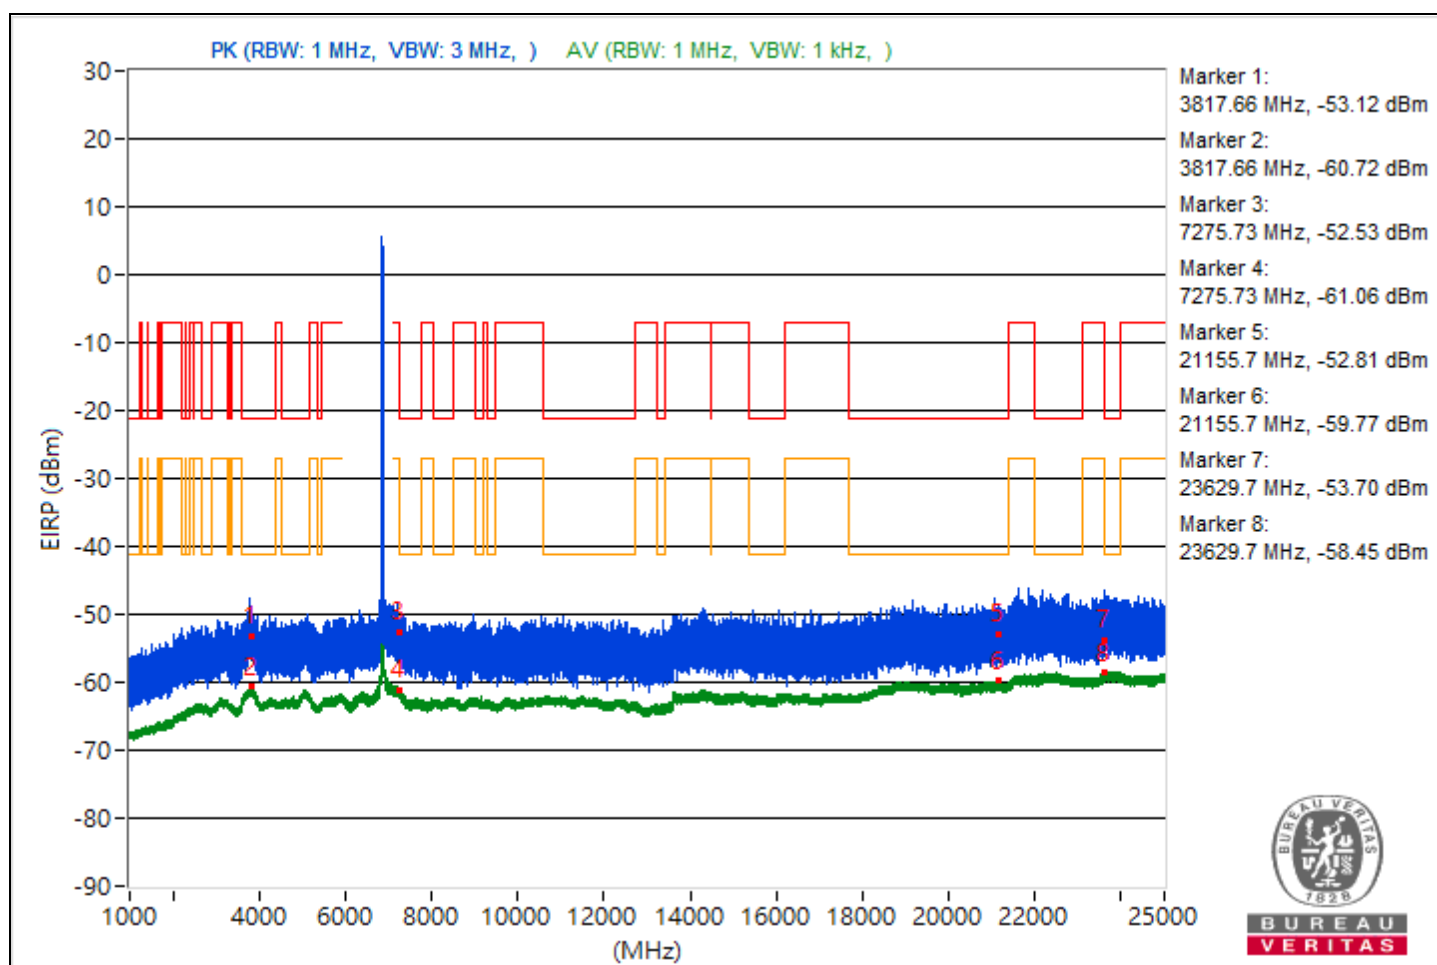


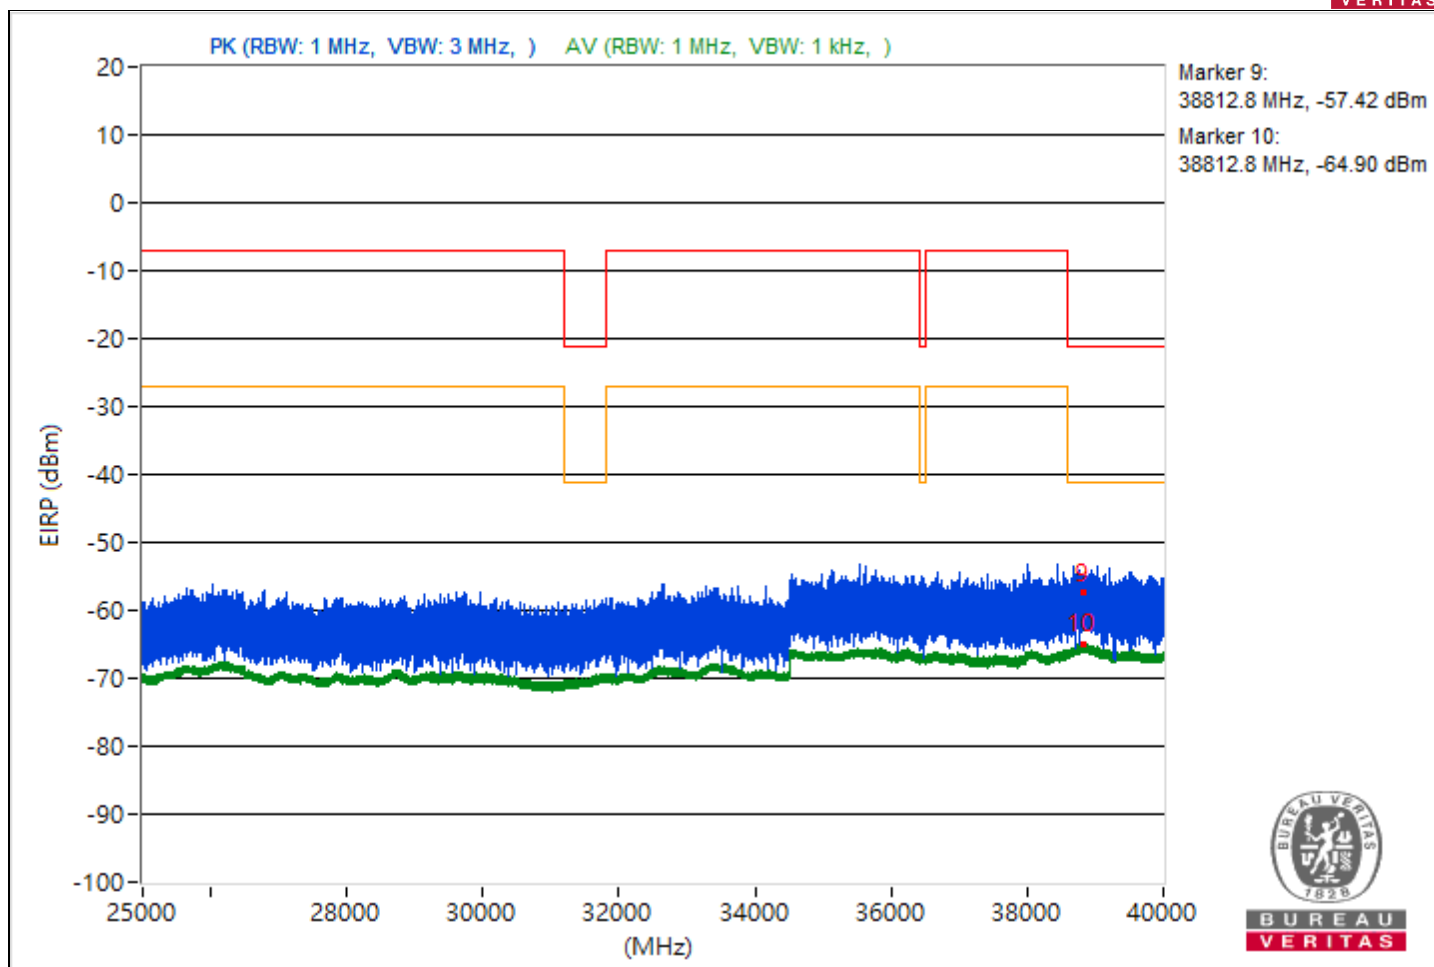


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.31	41.92 PK	74	-32.08	-58.26	4.92	-53.34
2	3786.31	34.6 AV	54	-19.4	-65.58	4.92	-60.66
3	7254.58	41.41 PK	74	-32.59	-58.77	4.92	-53.85
4	7254.58	34.83 AV	54	-19.17	-65.35	4.92	-60.43
5	21156.4	42.02 PK	74	-31.98	-58.16	4.92	-53.24
6	21156.4	35.53 AV	54	-18.47	-64.65	4.92	-59.73
7	22252.9	43.18 PK	74	-30.82	-57	4.92	-52.08
8	22252.9	36.7 AV	54	-17.3	-63.48	4.92	-58.56
9	38821.6	35.48 PK	74	-38.52	-64.7	4.92	-59.78
10	38821.6	30.43 AV	54	-23.57	-69.75	4.92	-64.83

Note: Margin value = Emission Level - Limit value

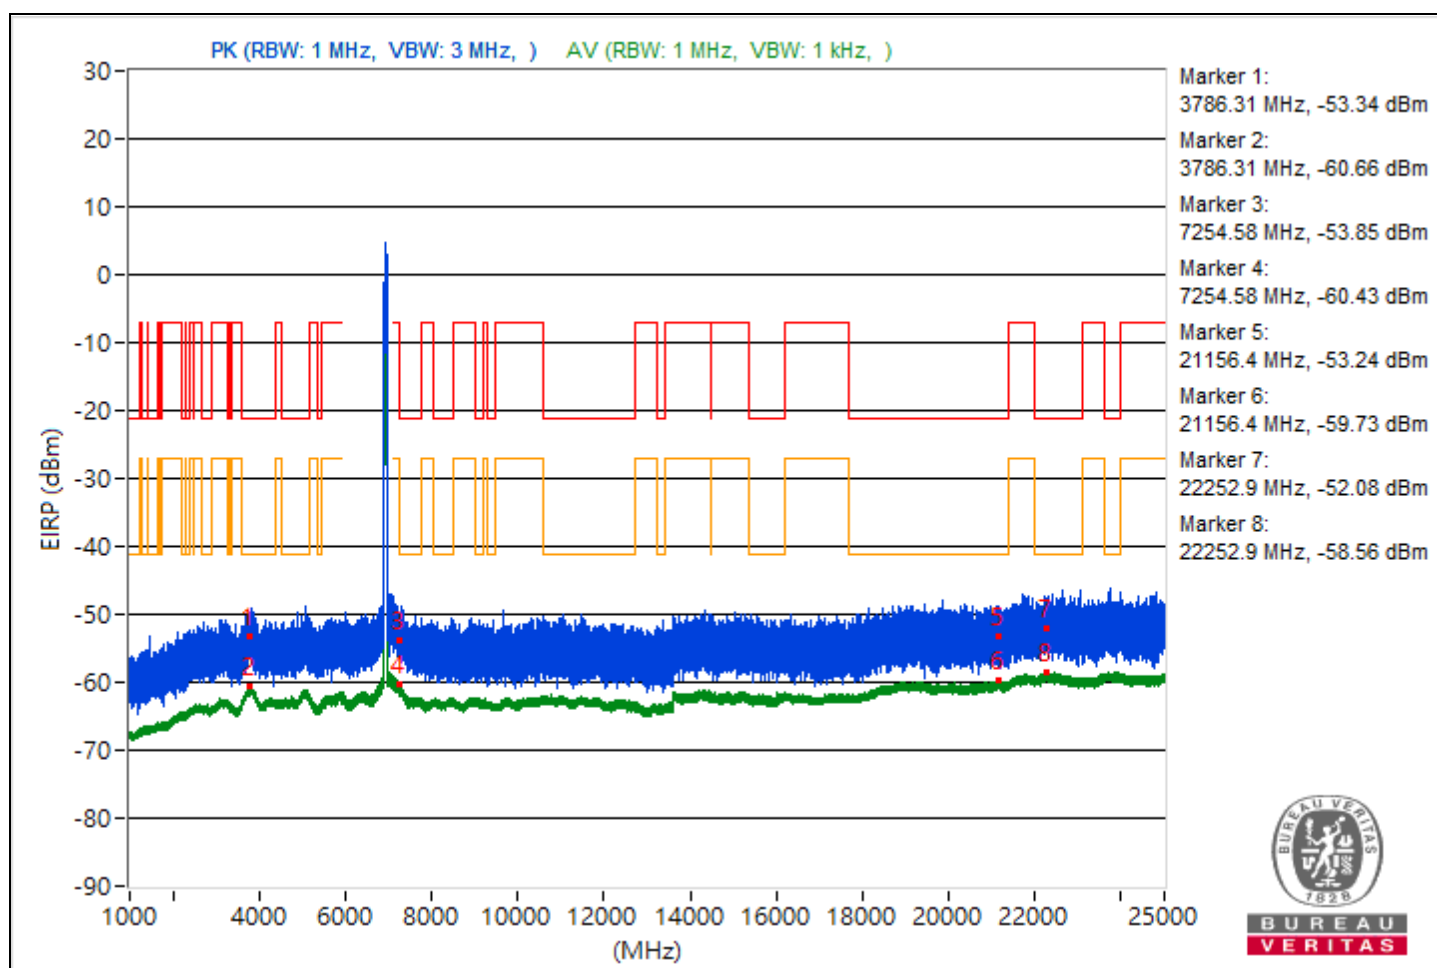

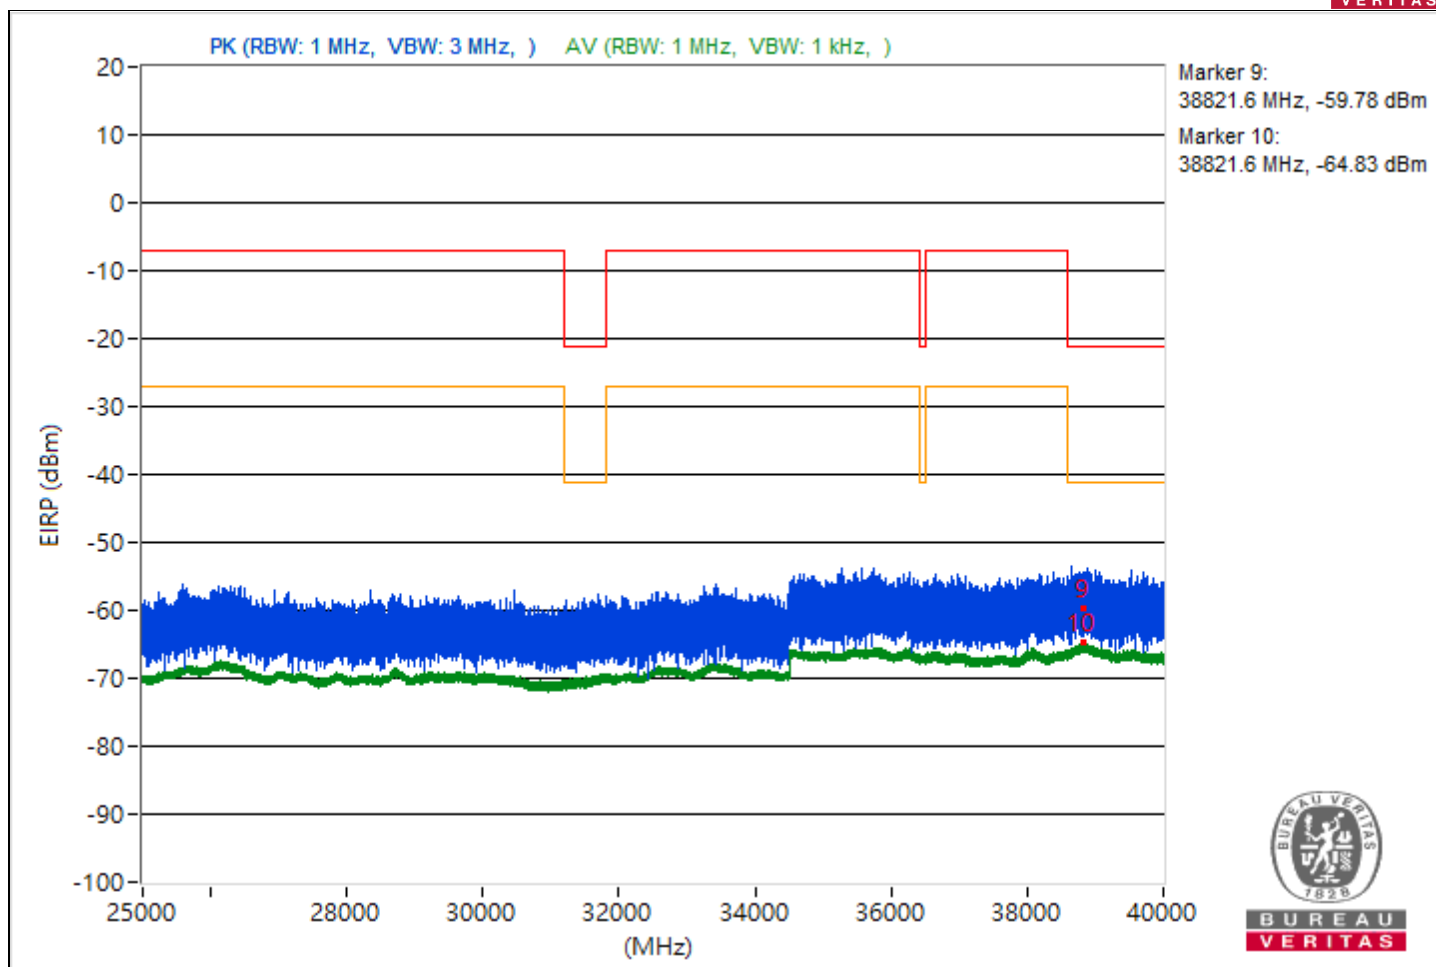



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3792.38	41.05 PK	74	-32.95	-59.13	4.92	-54.21
2	3792.38	34.58 AV	54	-19.42	-65.6	4.92	-60.68
3	7258.31	42.29 PK	74	-31.71	-57.89	4.92	-52.97
4	7258.31	35.27 AV	54	-18.73	-64.91	4.92	-59.99
5	21075.7	41.51 PK	74	-32.49	-58.67	4.92	-53.75
6	21075.7	35.52 AV	54	-18.48	-64.66	4.92	-59.74
7	22525	43.44 PK	74	-30.56	-56.74	4.92	-51.82
8	22525	36.65 AV	54	-17.35	-63.53	4.92	-58.61
9	38891.2	37.54 PK	74	-36.46	-62.64	4.92	-57.72
10	38891.2	30.46 AV	54	-23.54	-69.72	4.92	-64.8

Note: Margin value = Emission Level - Limit value

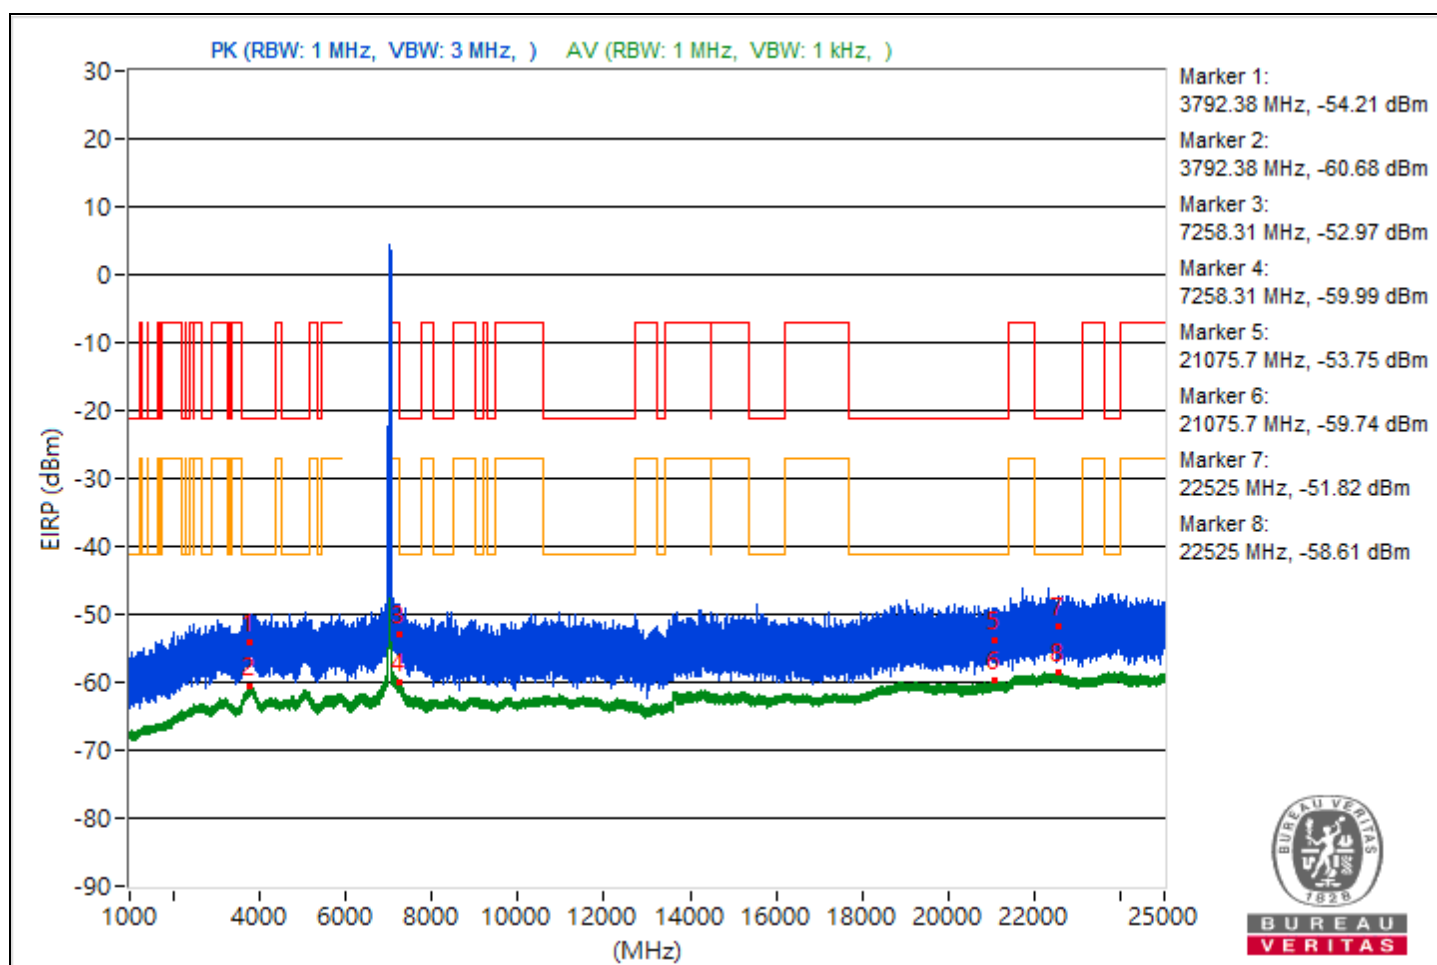

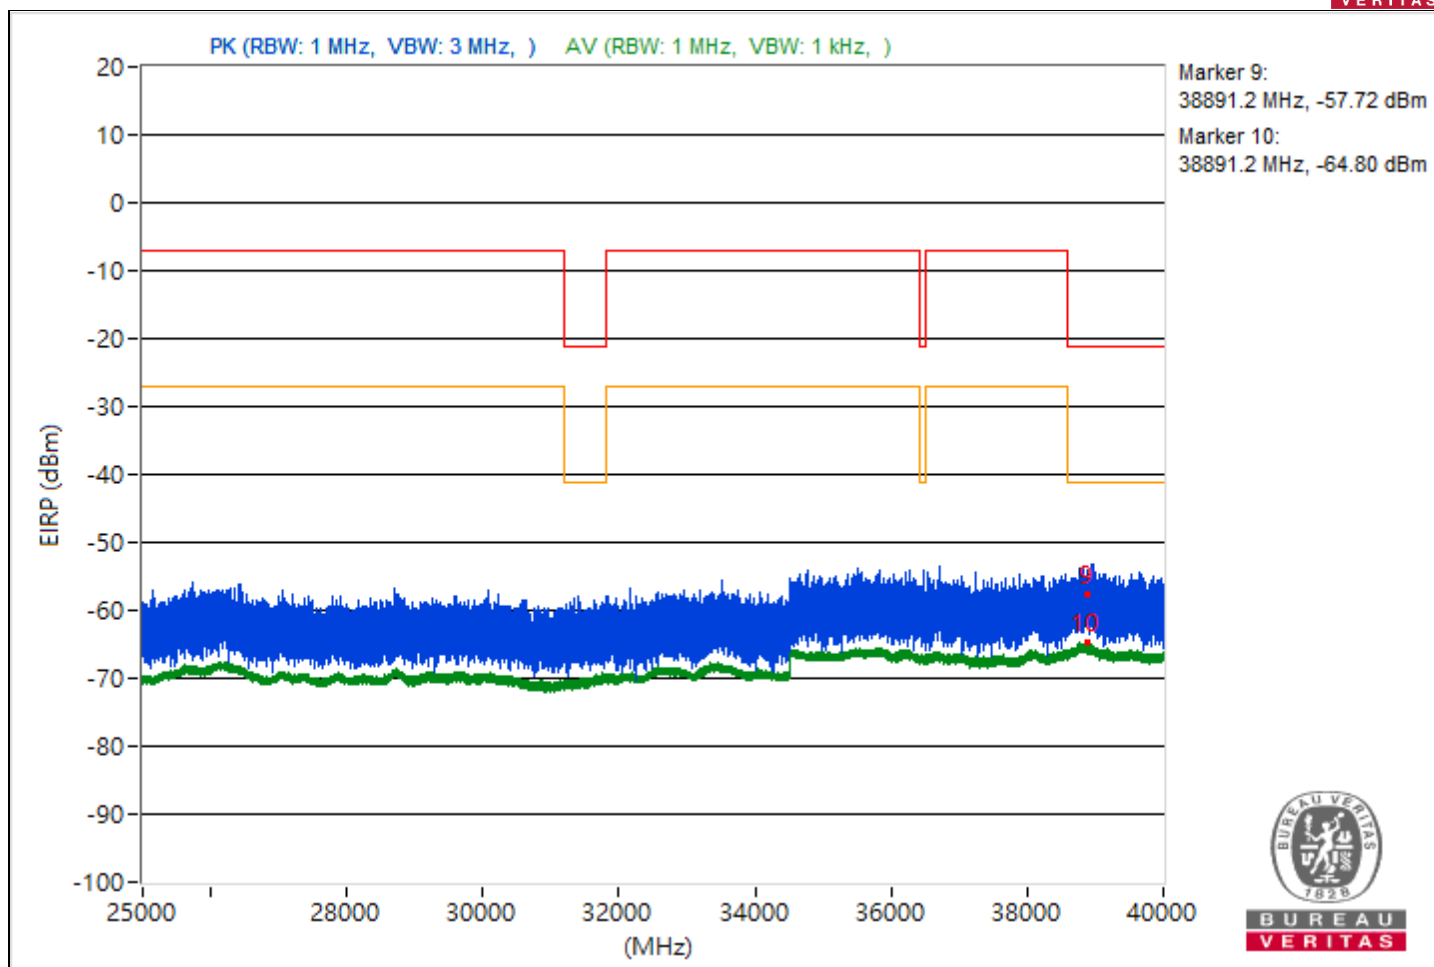



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.37	40.82 PK	74	-33.18	-59.36	4.92	-54.44
2	3777.37	34.54 AV	54	-19.46	-65.64	4.92	-60.72
3	8033.24	49.02 PK	74	-24.98	-51.16	4.92	-46.24
4	8033.24	45.36 AV	54	-8.64	-54.82	4.92	-49.9
5	21172.3	42.03 PK	74	-31.97	-58.15	4.92	-53.23
6	21172.3	35.58 AV	54	-18.42	-64.6	4.92	-59.68
7	22327.7	43.44 PK	74	-30.56	-56.74	4.92	-51.82
8	22327.7	36.73 AV	54	-17.27	-63.45	4.92	-58.53
9	38805.42	33.76 PK	74	-40.24	-66.42	4.92	-61.5
10	38805.42	30.37 AV	54	-23.63	-69.81	4.92	-64.89

Note: Margin value = Emission Level - Limit value

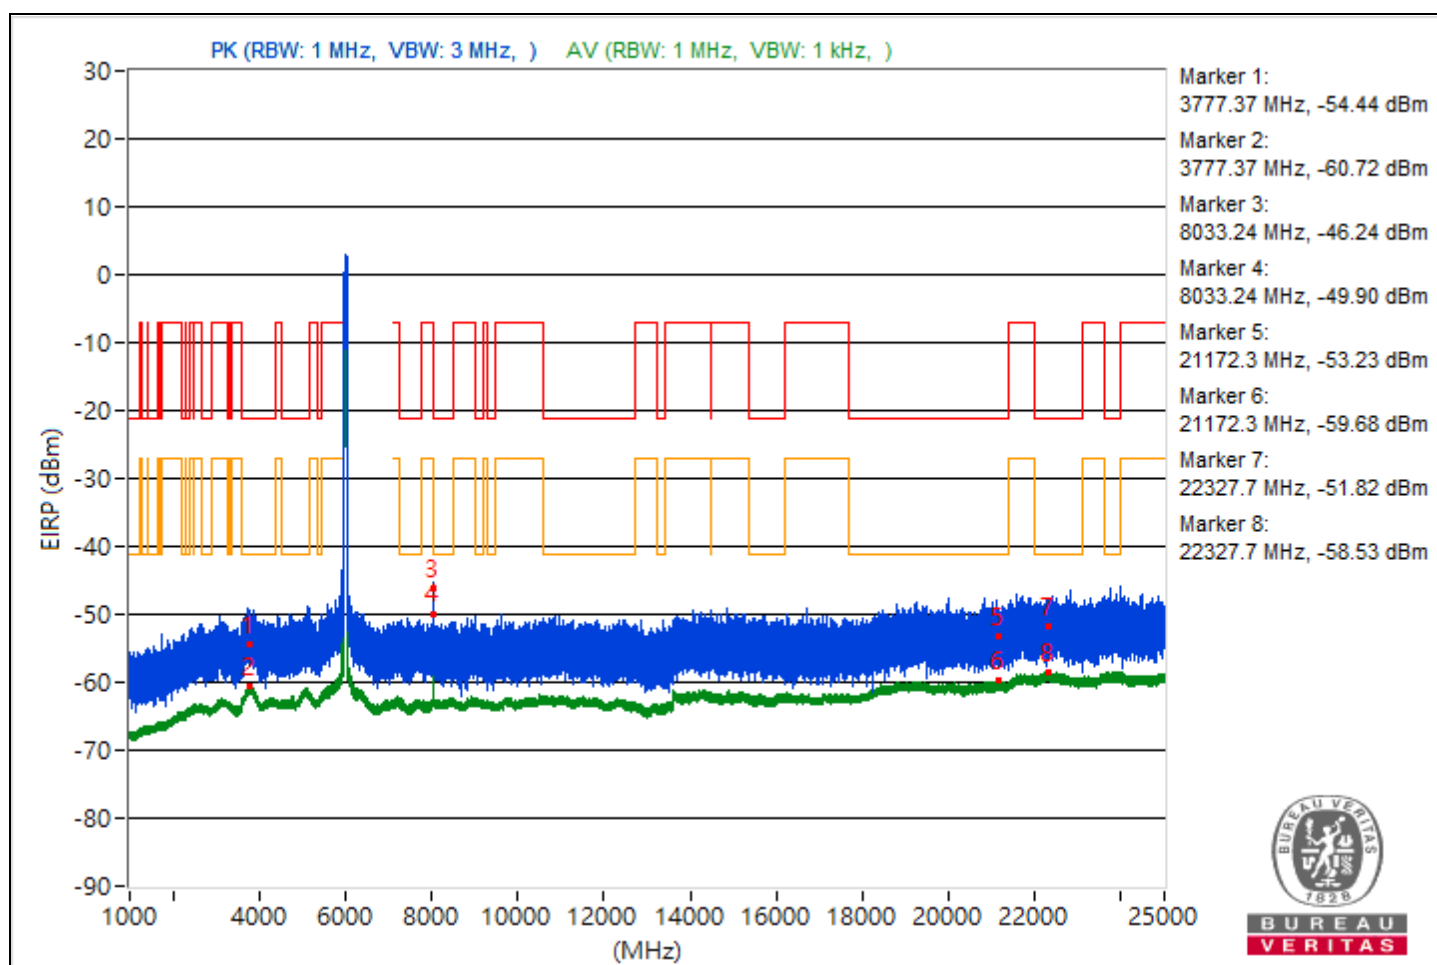

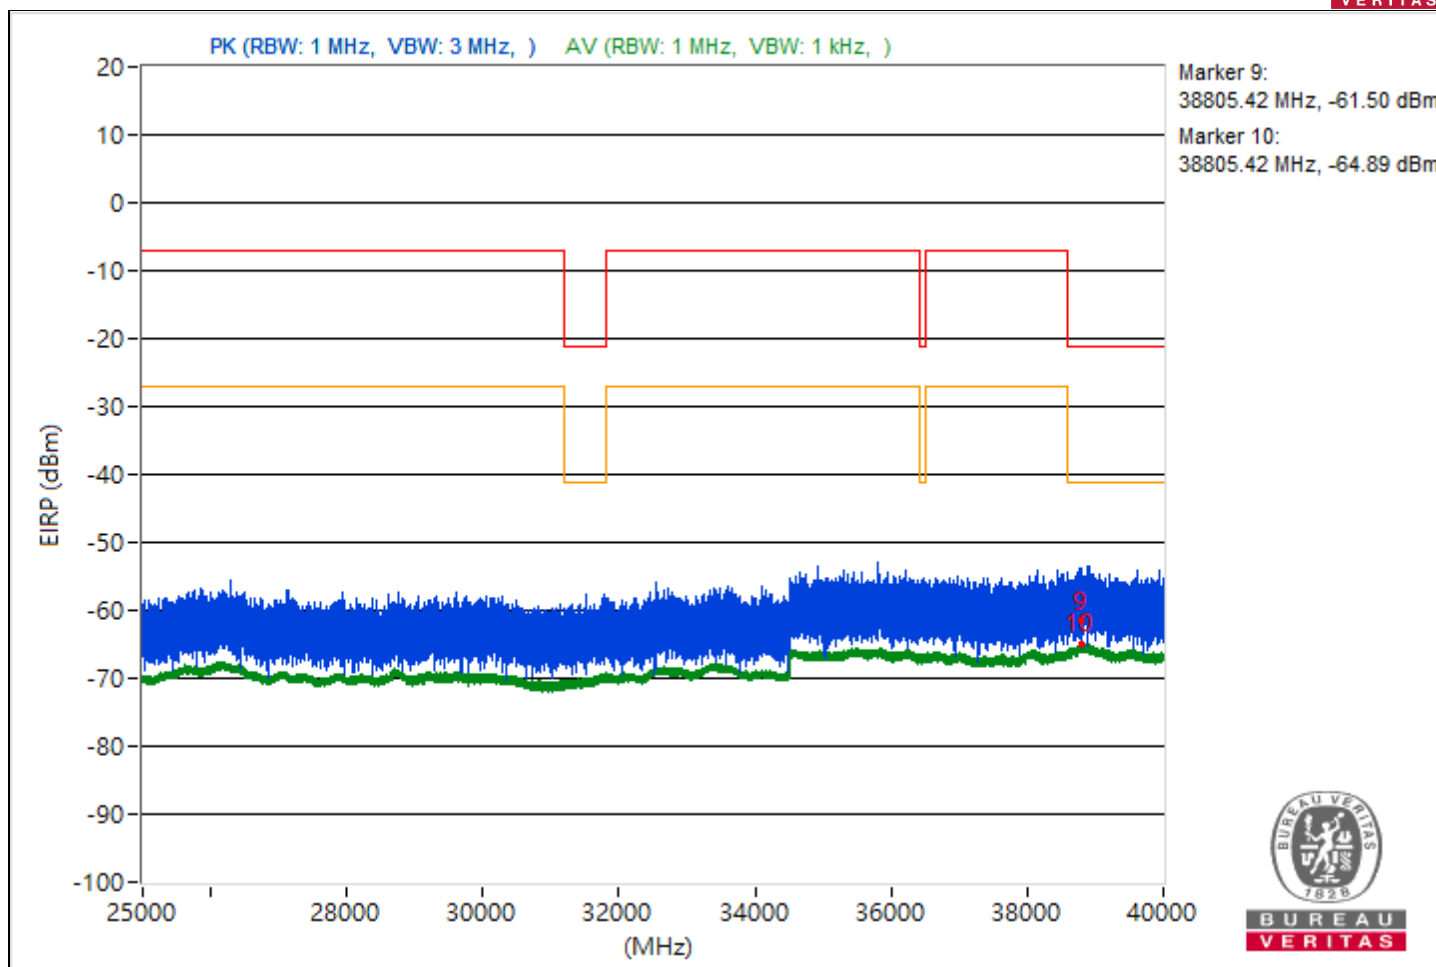



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.77	41.11 PK	74	-32.89	-59.07	4.92	-54.15
2	3820.77	34.47 AV	54	-19.53	-65.71	4.92	-60.79
3	8460	46.25 PK	74	-27.75	-53.93	4.92	-49.01
4	8460	41.54 AV	54	-12.46	-58.64	4.92	-53.72
5	21195.2	40.84 PK	74	-33.16	-59.34	4.92	-54.42
6	21195.2	35.42 AV	54	-18.58	-64.76	4.92	-59.84
7	22317.8	44.73 PK	74	-29.27	-55.45	4.92	-50.53
8	22317.8	36.83 AV	54	-17.17	-63.35	4.92	-58.43
9	38823.73	36.48 PK	74	-37.52	-63.7	4.92	-58.78
10	38823.73	30.45 AV	54	-23.55	-69.73	4.92	-64.81

Note: Margin value = Emission Level - Limit value

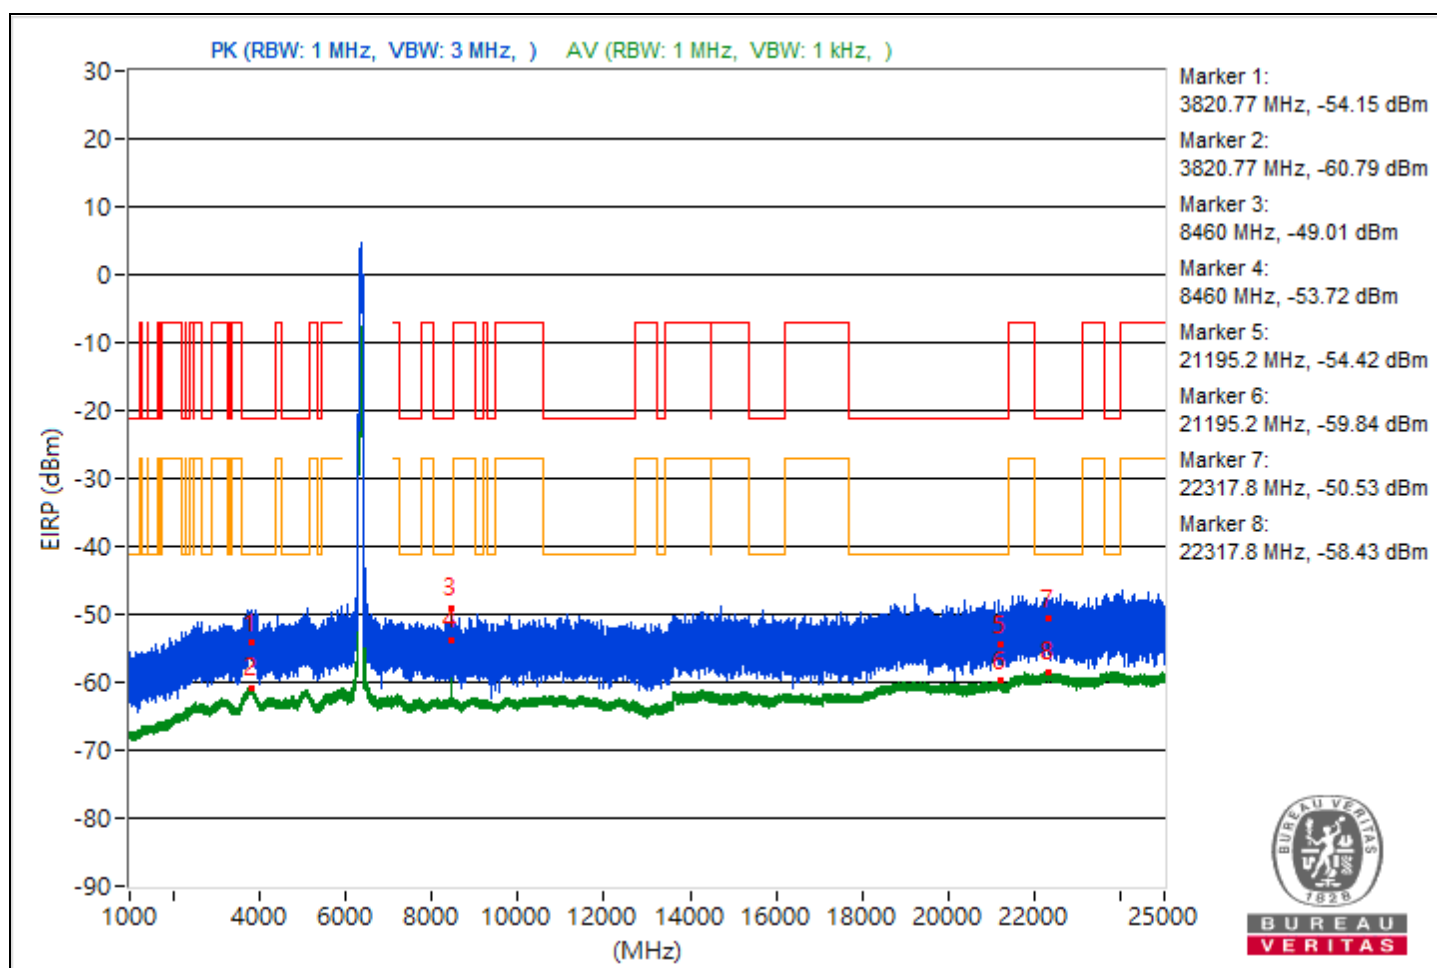

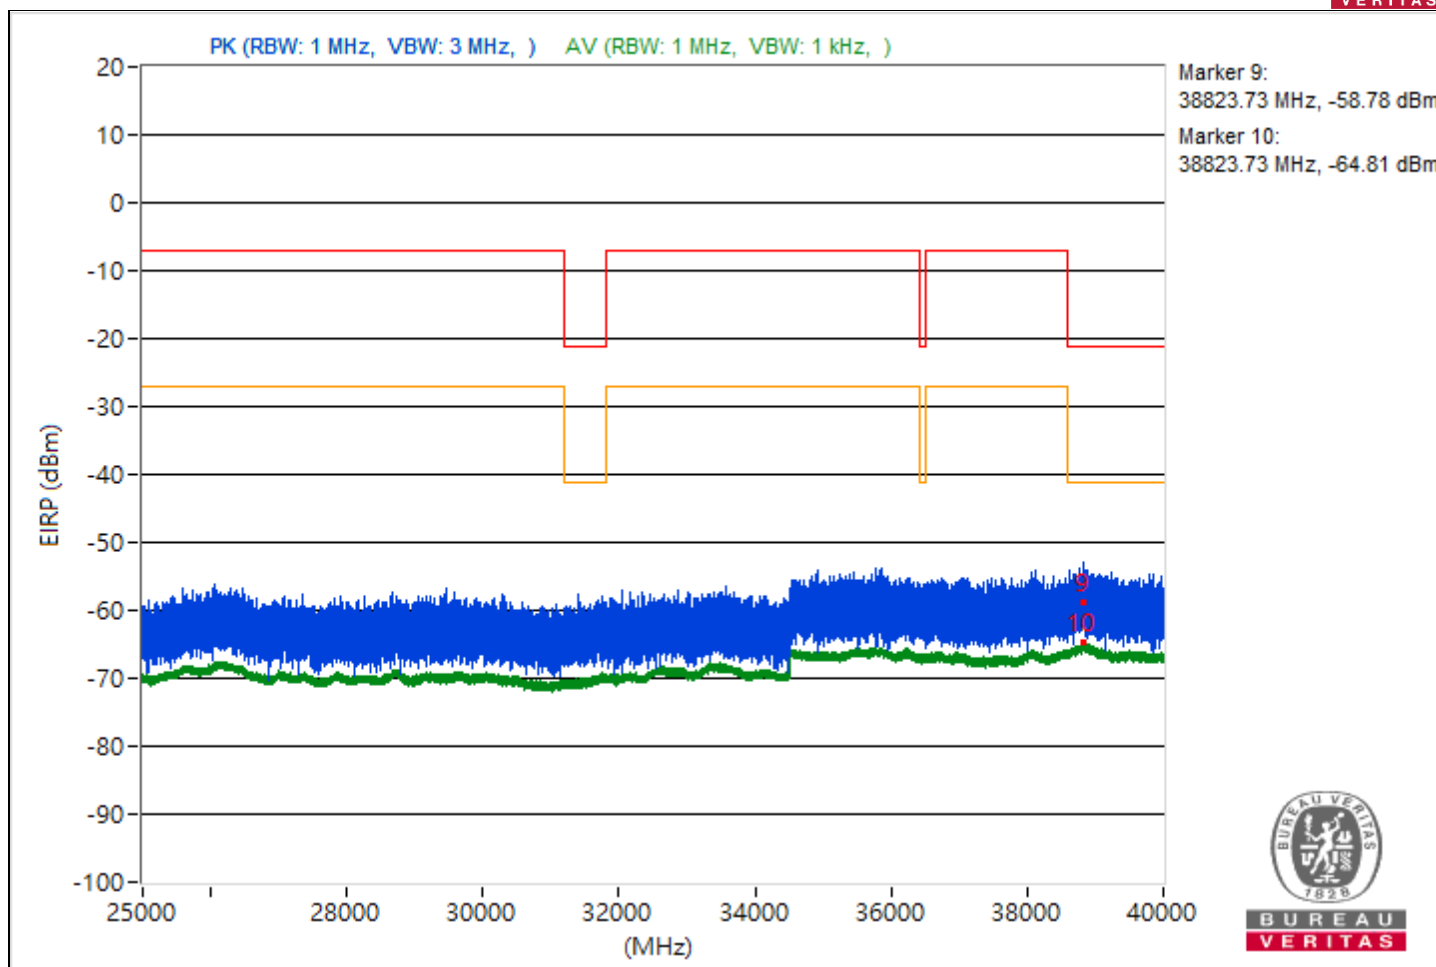



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.29	39.85 PK	74	-34.15	-60.33	4.92	-55.41
2	3812.29	34.71 AV	54	-19.29	-65.47	4.92	-60.55
3	14498.04	40.71 PK	74	-33.29	-59.47	4.92	-54.55
4	14498.04	33.66 AV	54	-20.34	-66.52	4.92	-61.6
5	20819.4	40.15 PK	74	-33.85	-60.03	4.92	-55.11
6	20819.4	35.46 AV	54	-18.54	-64.72	4.92	-59.8
7	22331.8	44.29 PK	74	-29.71	-55.89	4.92	-50.97
8	22331.8	36.83 AV	54	-17.17	-63.35	4.92	-58.43
9	38828.62	36.37 PK	74	-37.63	-63.81	4.92	-58.89
10	38828.62	30.56 AV	54	-23.44	-69.62	4.92	-64.7

Note: Margin value = Emission Level - Limit value

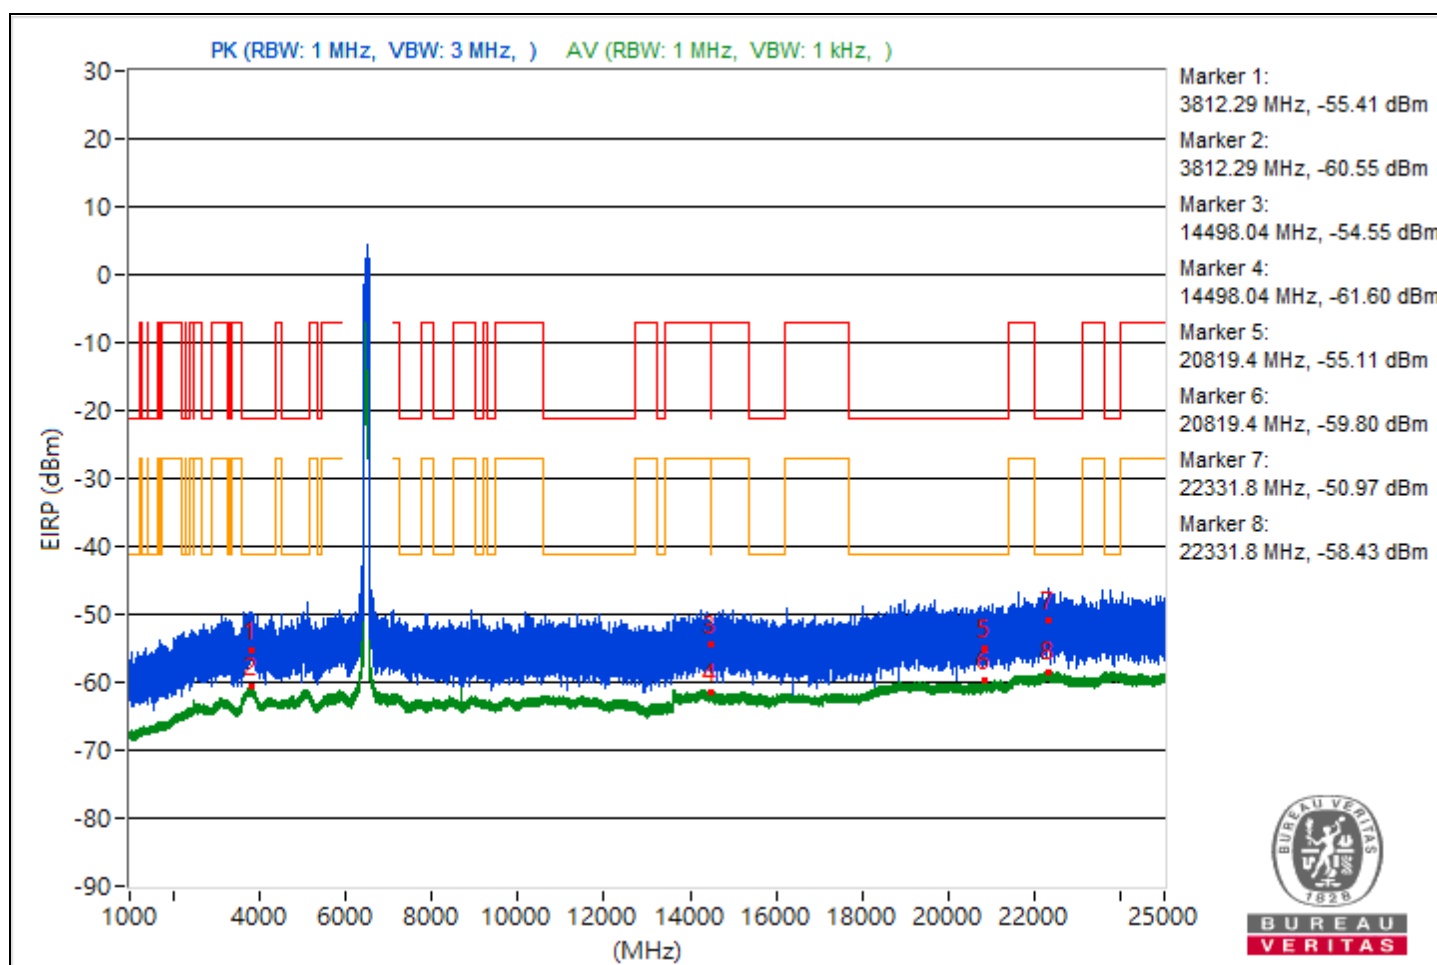

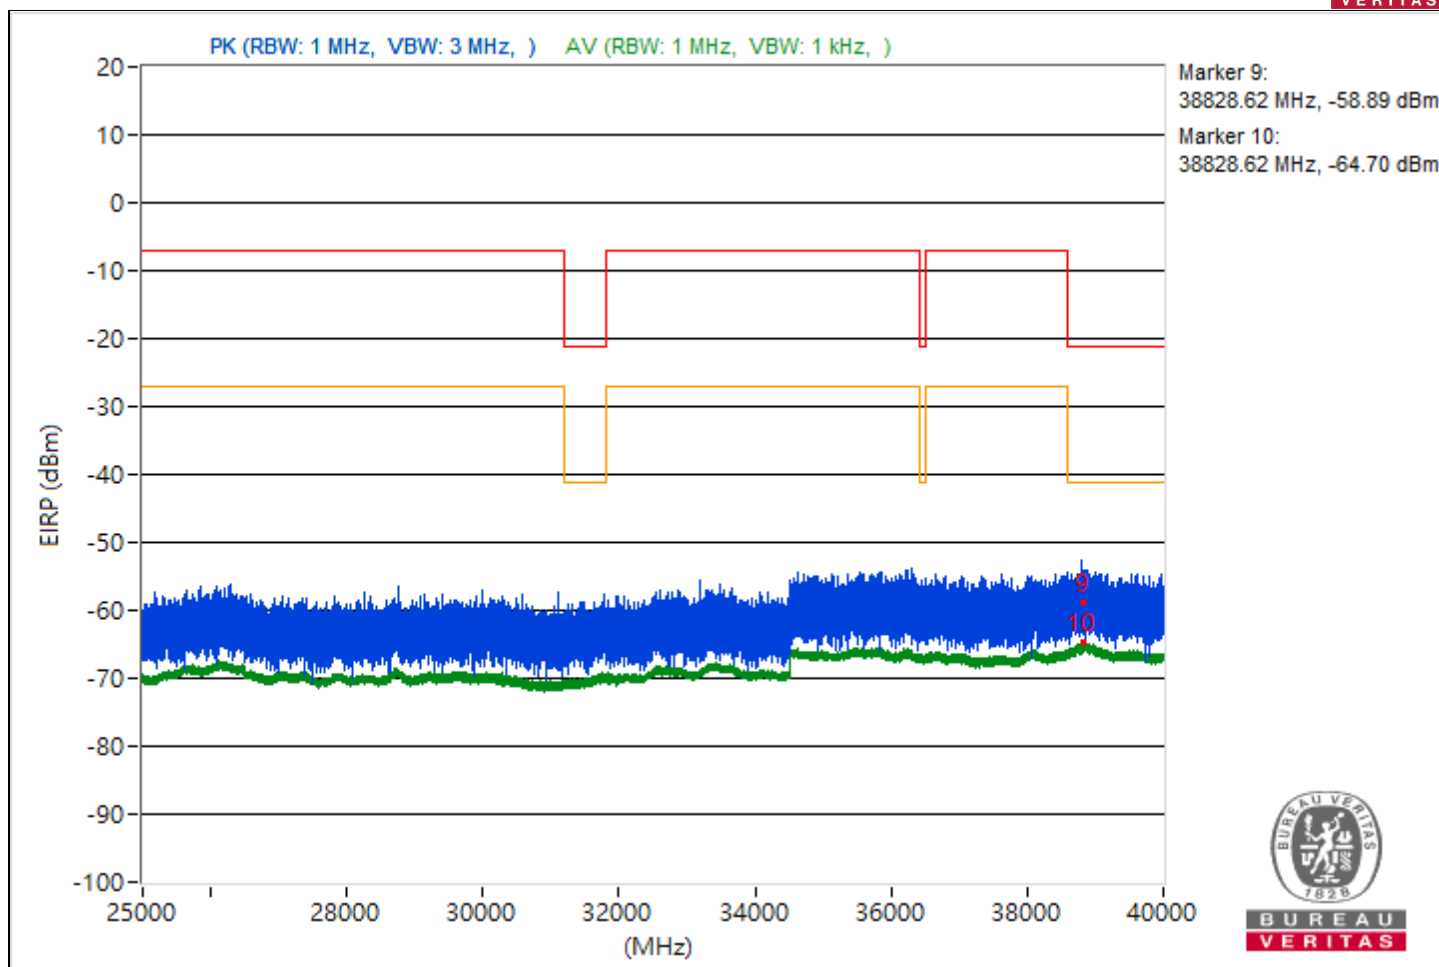



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.92	43.2 PK	74	-30.8	-56.98	4.92	-52.06
2	3806.92	34.52 AV	54	-19.48	-65.66	4.92	-60.74
3	14488.89	39.49 PK	74	-34.51	-60.69	4.92	-55.77
4	14488.89	33.74 AV	54	-20.26	-66.44	4.92	-61.52
5	21095.8	43.26 PK	74	-30.74	-56.92	4.92	-52.00
6	21095.8	35.47 AV	54	-18.53	-64.71	4.92	-59.79
7	22263.6	45.12 PK	74	-28.88	-55.06	4.92	-50.14
8	22263.6	36.81 AV	54	-17.19	-63.37	4.92	-58.45
9	38848.89	38.67 PK	74	-35.33	-61.51	4.92	-56.59
10	38848.89	30.4 AV	54	-23.6	-69.78	4.92	-64.86

Note: Margin value = Emission Level - Limit value

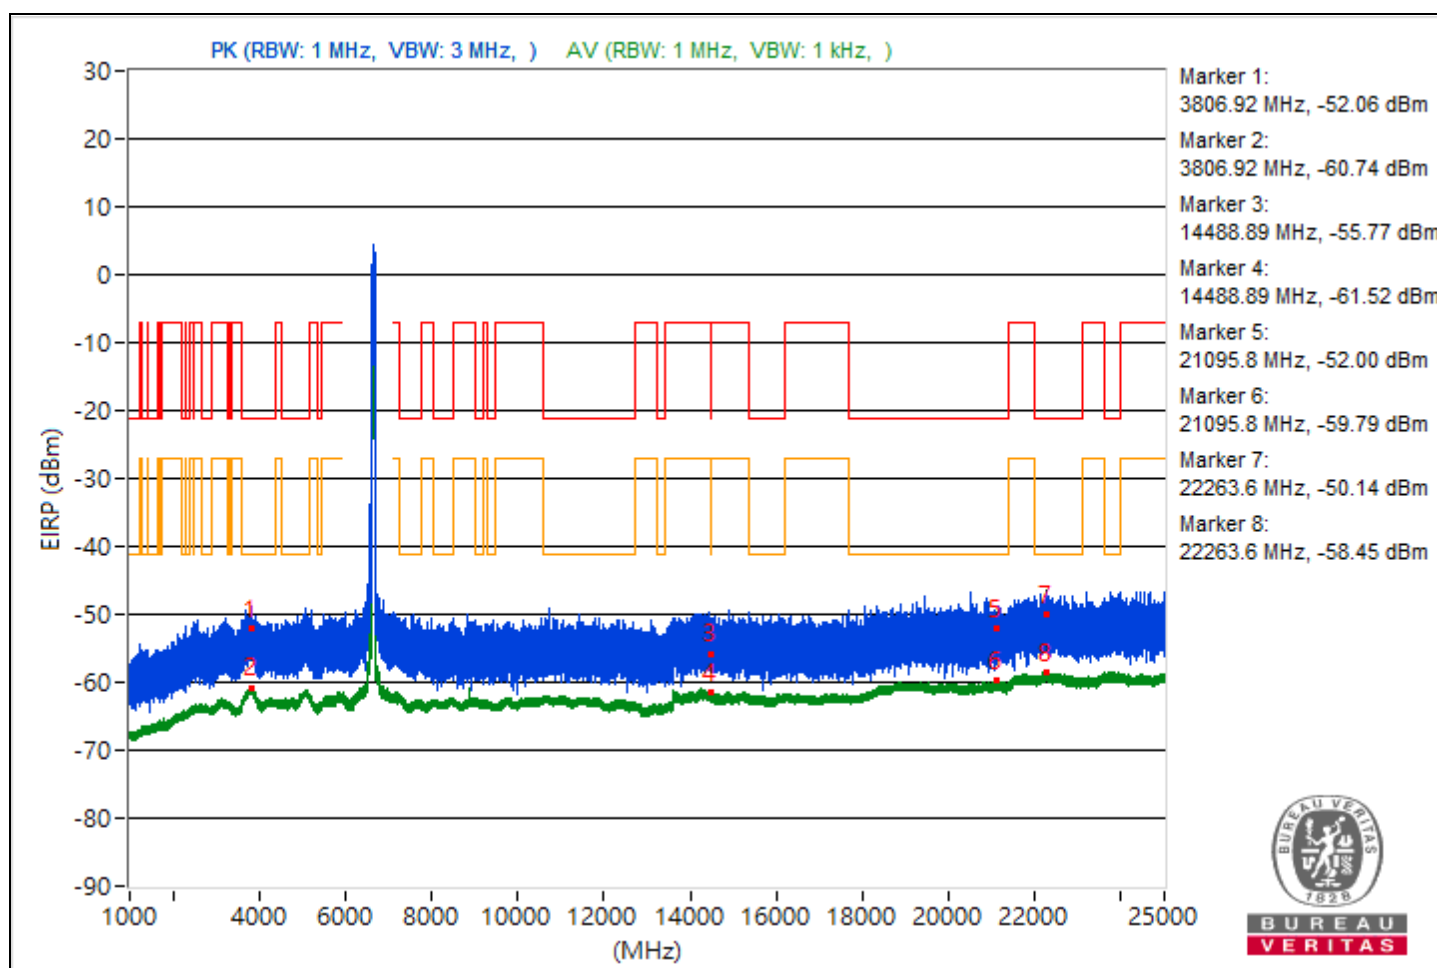

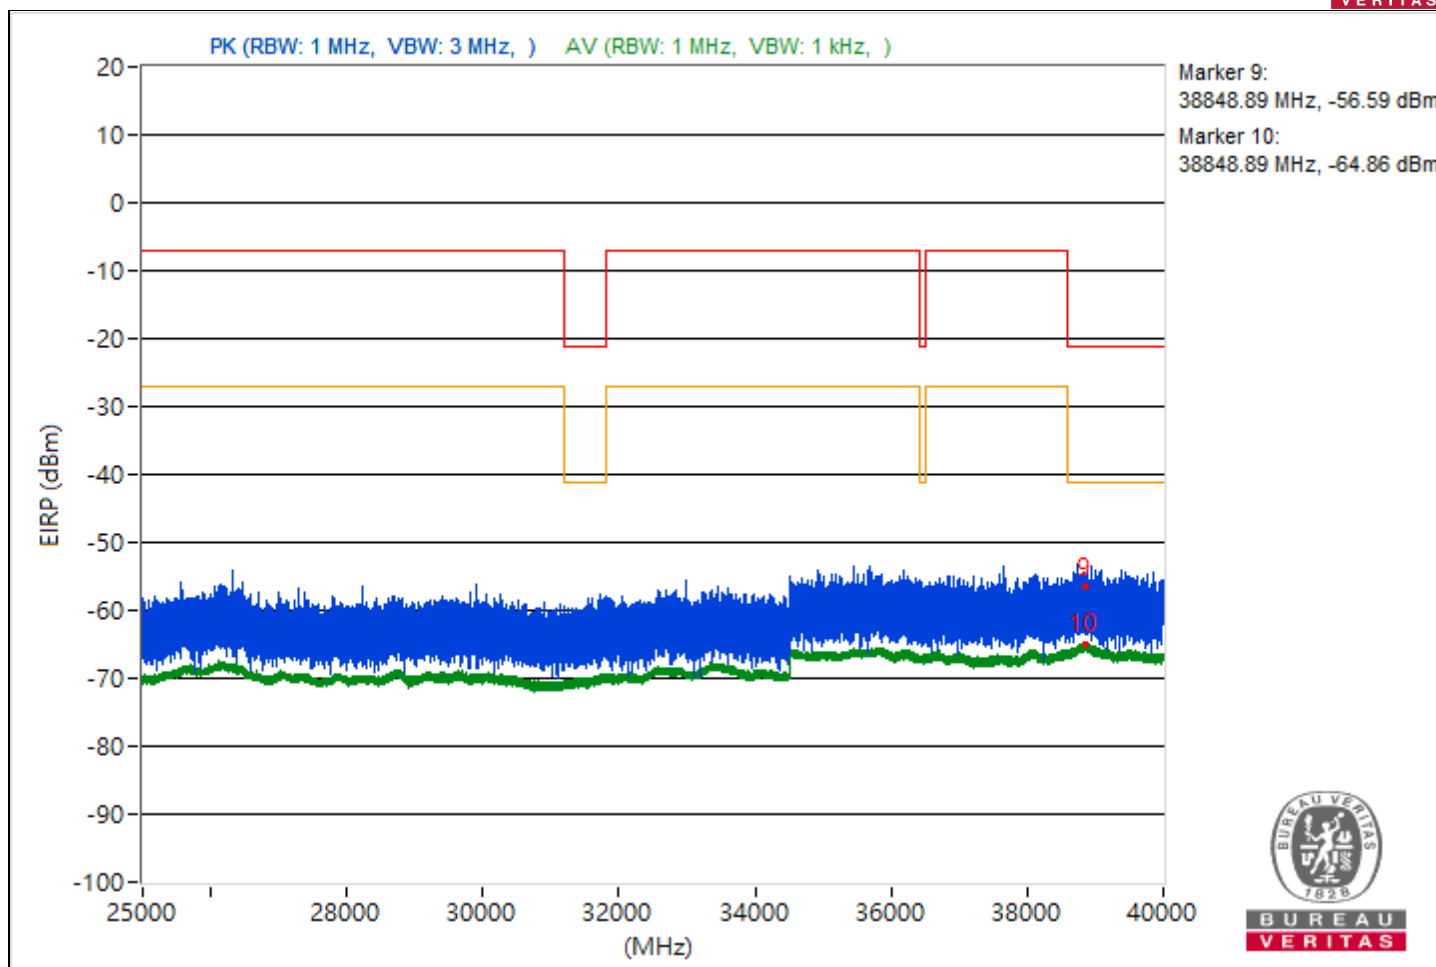



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3768.19	39.14 PK	74	-34.86	-61.04	4.92	-56.12
2	3768.19	34.51 AV	54	-19.49	-65.67	4.92	-60.75
3	7253.64	43.25 PK	74	-30.75	-56.93	4.92	-52.01
4	7253.64	34.36 AV	54	-19.64	-65.82	4.92	-60.9
5	21165	40.99 PK	74	-33.01	-59.19	4.92	-54.27
6	21165	35.47 AV	54	-18.53	-64.71	4.92	-59.79
7	22406.9	45.66 PK	74	-28.34	-54.52	4.92	-49.6
8	22406.9	36.75 AV	54	-17.25	-63.43	4.92	-58.51
9	38823.38	34.57 PK	74	-39.43	-65.61	4.92	-60.69
10	38823.38	30.43 AV	54	-23.57	-69.75	4.92	-64.83

Note: Margin value = Emission Level - Limit value

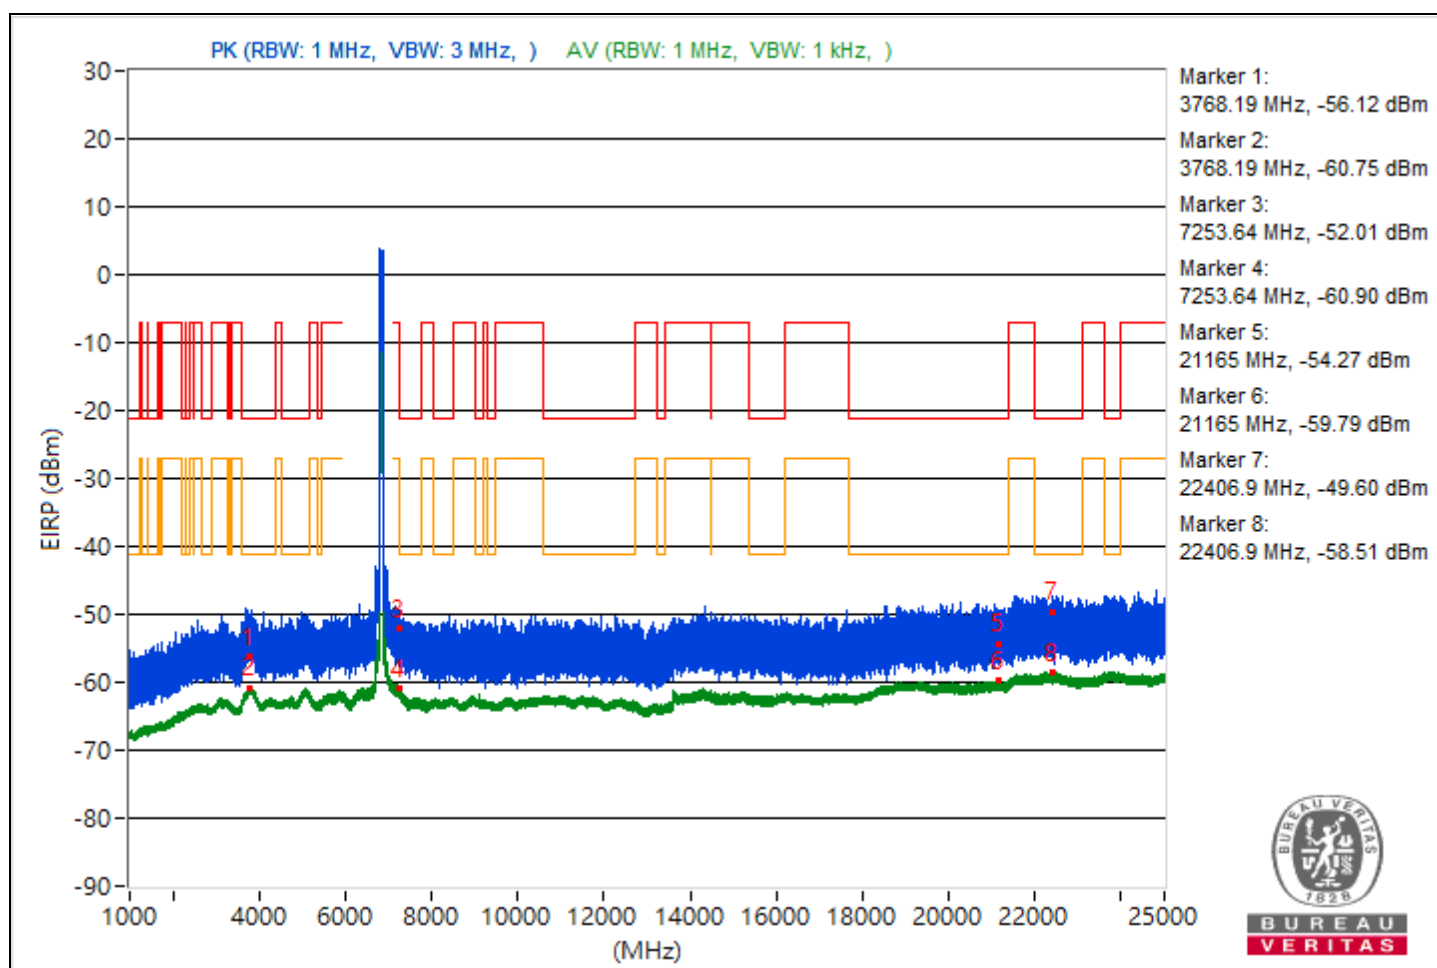

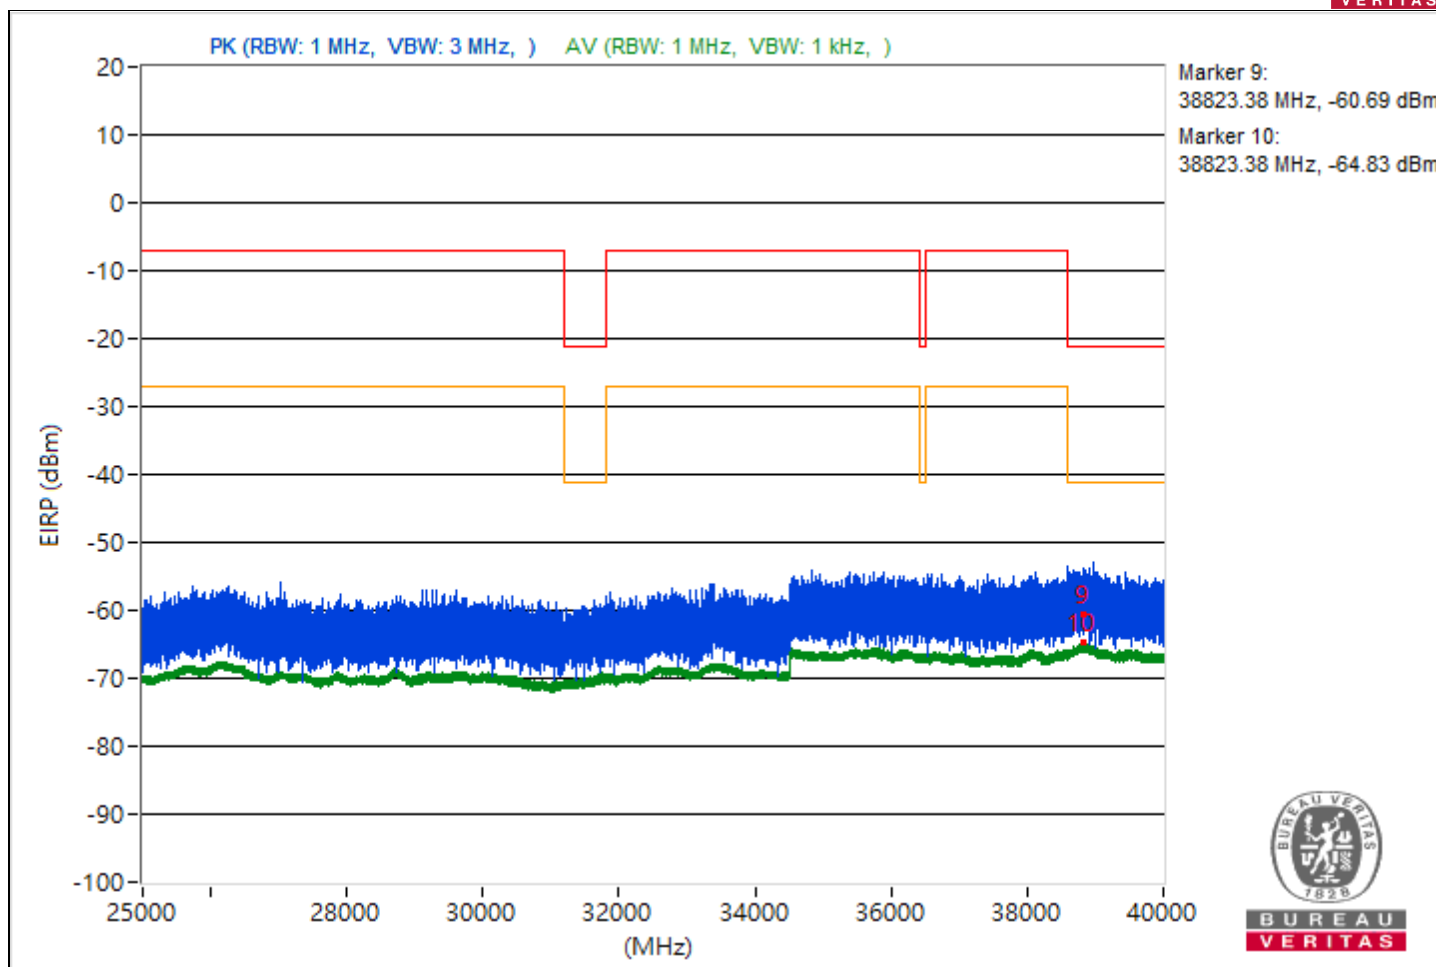



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.97	42.01 PK	74	-31.99	-58.17	4.92	-53.25
2	3803.97	34.67 AV	54	-19.33	-65.51	4.92	-60.59
3	7266.17	42.21 PK	74	-31.79	-57.97	4.92	-53.05
4	7266.17	34.18 AV	54	-19.82	-66	4.92	-61.08
5	21154.9	41.73 PK	74	-32.27	-58.45	4.92	-53.53
6	21154.9	35.56 AV	54	-18.44	-64.62	4.92	-59.7
7	22220.4	43.56 PK	74	-30.44	-56.62	4.92	-51.7
8	22220.4	36.85 AV	54	-17.15	-63.33	4.92	-58.41
9	38924.36	37.6 PK	74	-36.4	-62.58	4.92	-57.66
10	38924.36	30.54 AV	54	-23.46	-69.64	4.92	-64.72

Note: Margin value = Emission Level - Limit value

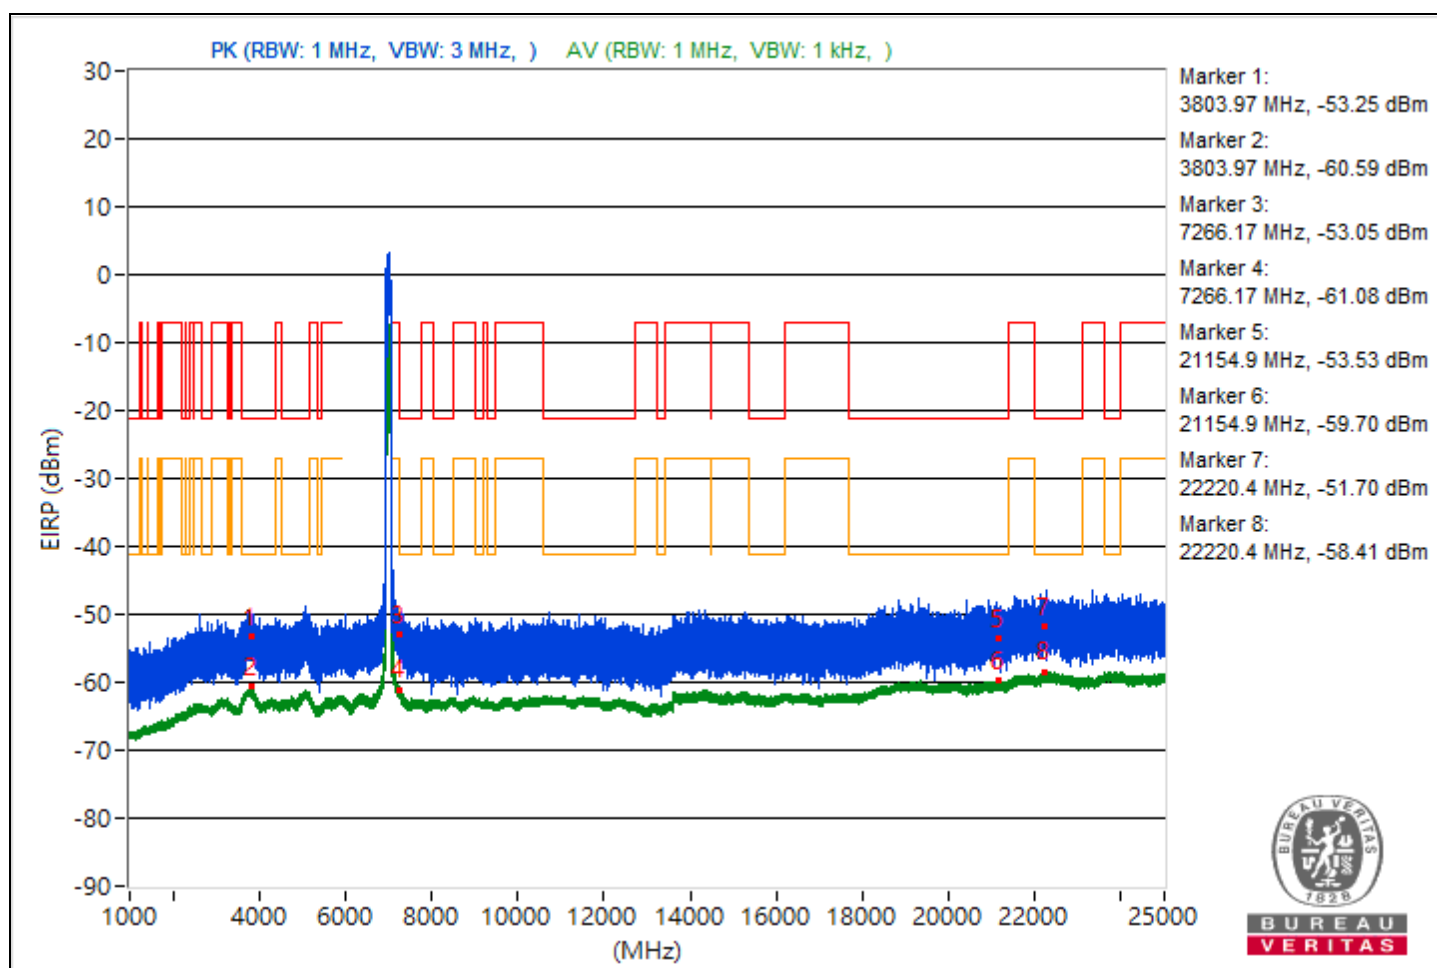

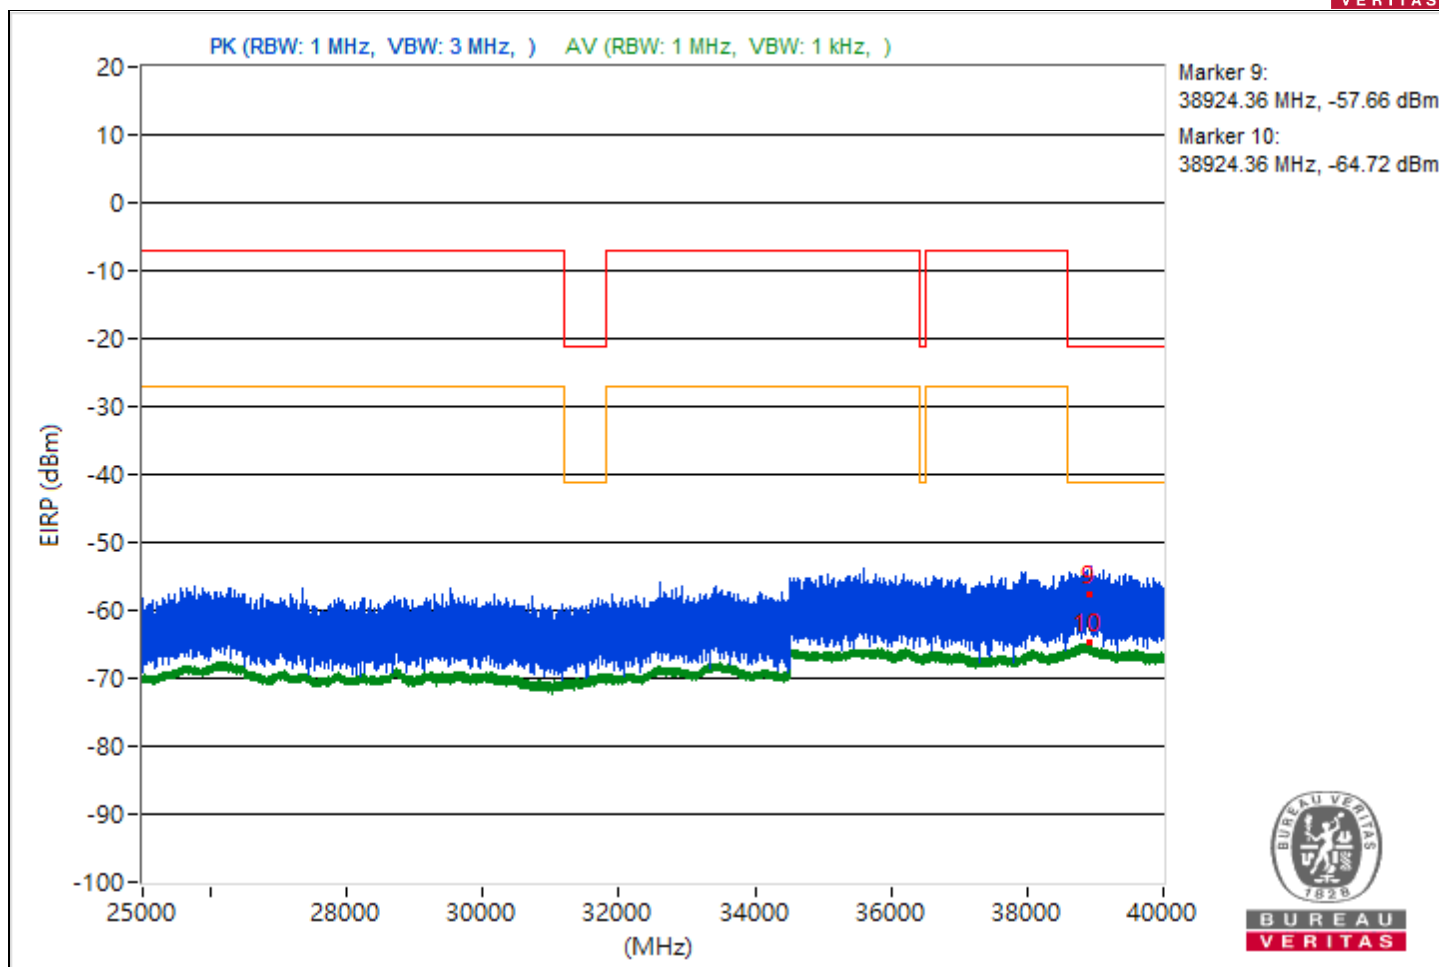



RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.7	41.76 PK	74	-32.24	-58.42	4.92	-53.5
2	3814.7	34.61 AV	54	-19.39	-65.57	4.92	-60.65
3	8033.33	47.72 PK	74	-26.28	-52.46	4.92	-47.54
4	8033.33	45.43 AV	54	-8.57	-54.75	4.92	-49.83
5	21396.3	39.7 PK	74	-34.3	-60.48	4.92	-55.56
6	21396.3	35.53 AV	54	-18.47	-64.65	4.92	-59.73
7	22356.3	42.65 PK	74	-31.35	-57.53	4.92	-52.61
8	22356.3	36.8 AV	54	-17.2	-63.38	4.92	-58.46
9	38788.53	37.63 PK	74	-36.37	-62.55	4.92	-57.63
10	38788.53	30.4 AV	54	-23.6	-69.78	4.92	-64.86

Note: Margin value = Emission Level - Limit value

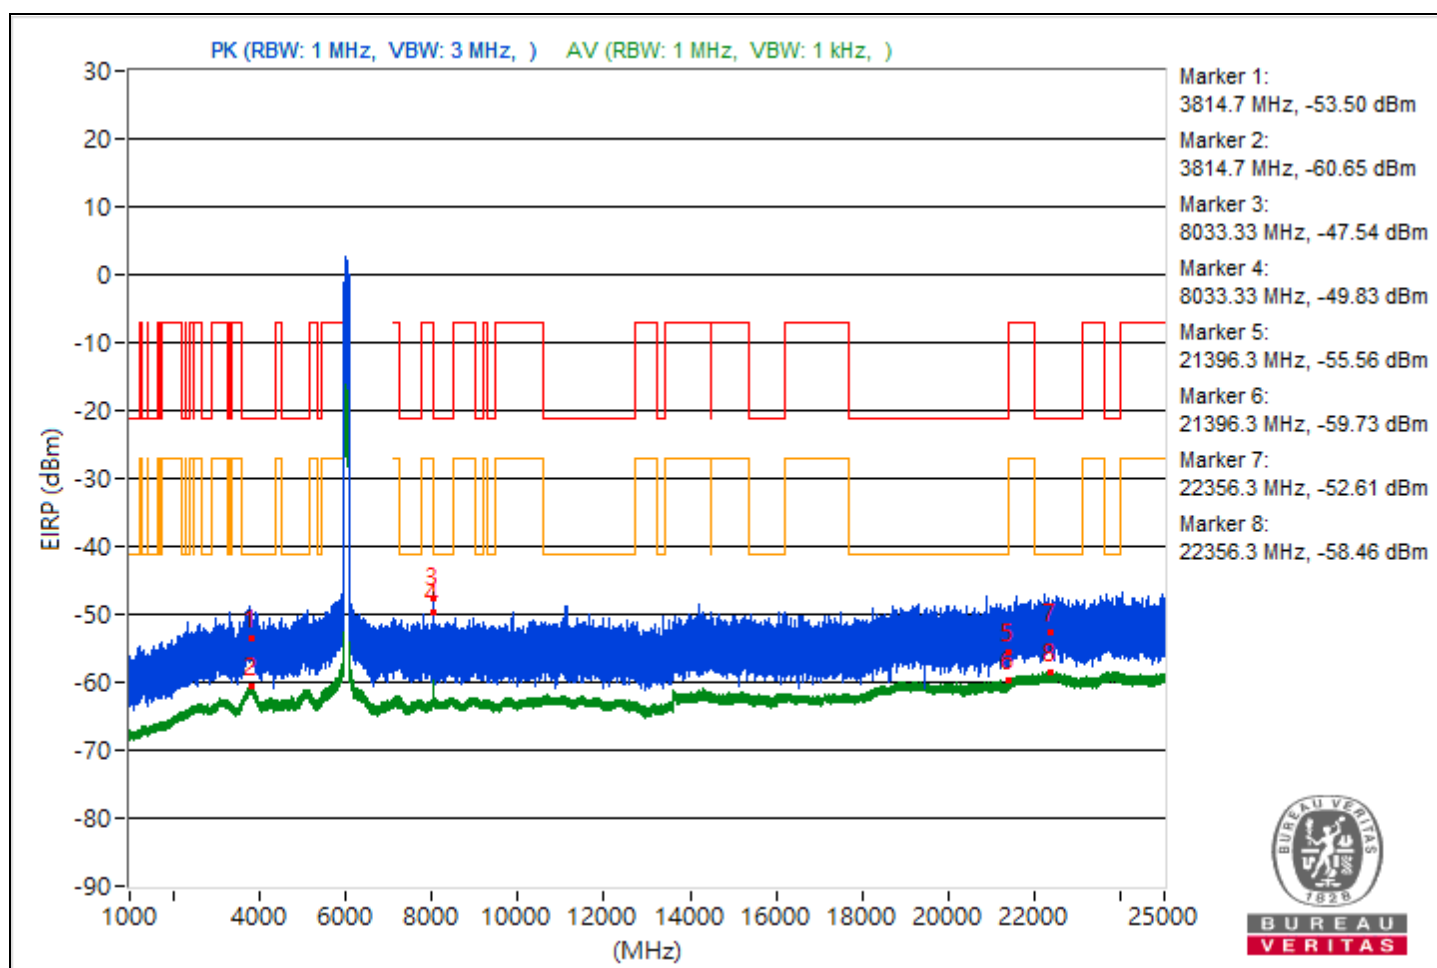


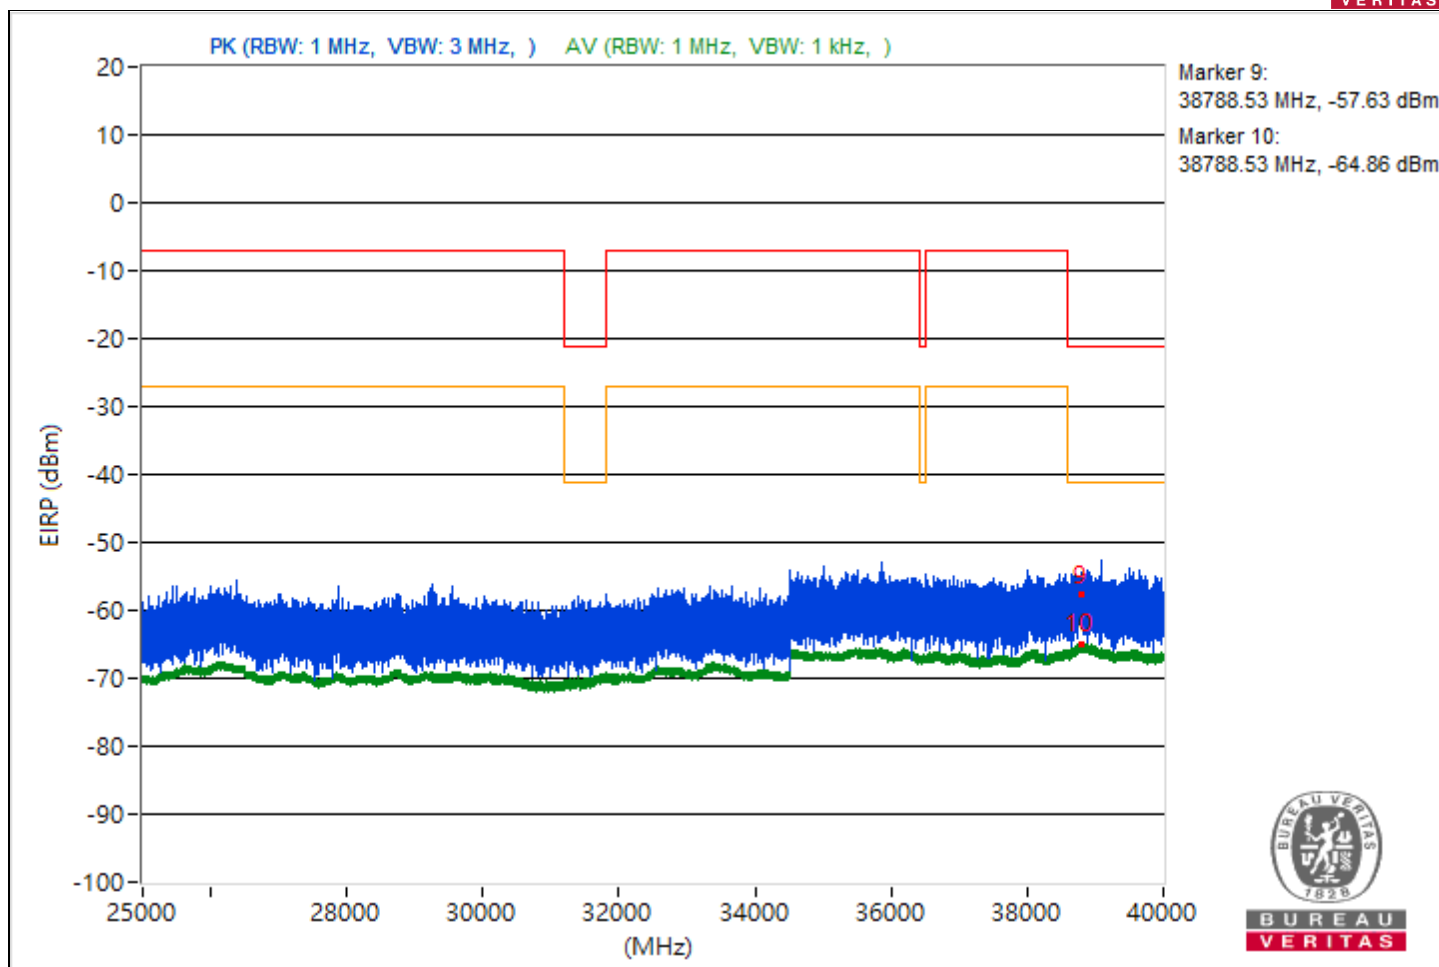


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.07	40.29 PK	74	-33.71	-59.89	4.92	-54.97
2	3813.07	34.66 AV	54	-19.34	-65.52	4.92	-60.6
3	8459.91	44.65 PK	74	-29.35	-55.53	4.92	-50.61
4	8459.91	41.37 AV	54	-12.63	-58.81	4.92	-53.89
5	21144.7	41.31 PK	74	-32.69	-58.87	4.92	-53.95
6	21144.7	35.42 AV	54	-18.58	-64.76	4.92	-59.84
7	22255.4	43.55 PK	74	-30.45	-56.63	4.92	-51.71
8	22255.4	36.85 AV	54	-17.15	-63.33	4.92	-58.41
9	38838.49	34.84 PK	74	-39.16	-65.34	4.92	-60.42
10	38838.49	30.34 AV	54	-23.66	-69.84	4.92	-64.92

Note: Margin value = Emission Level - Limit value

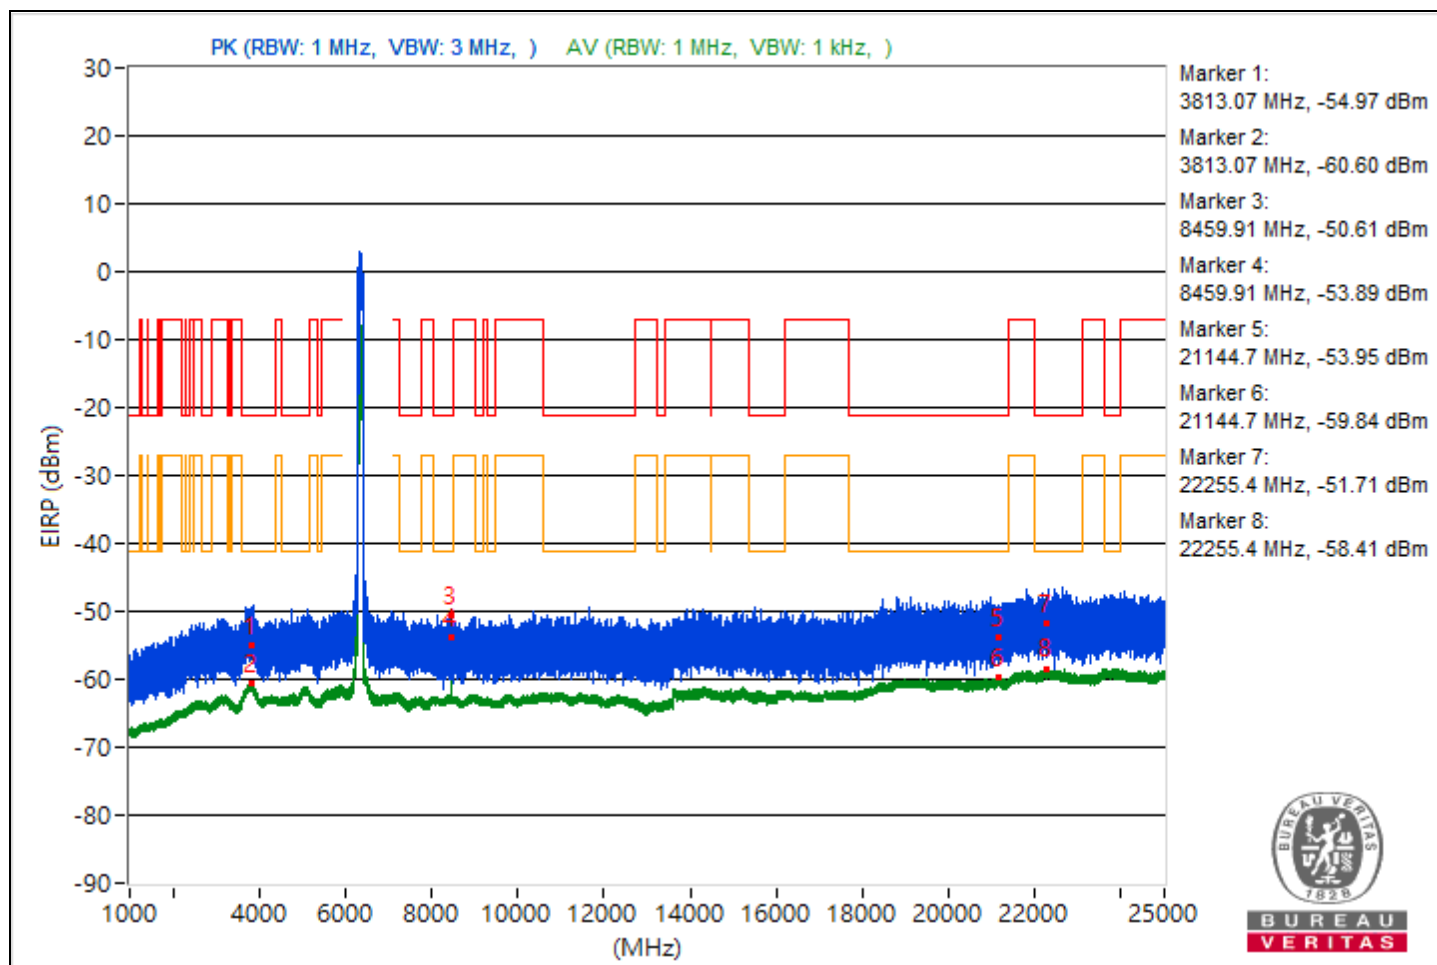


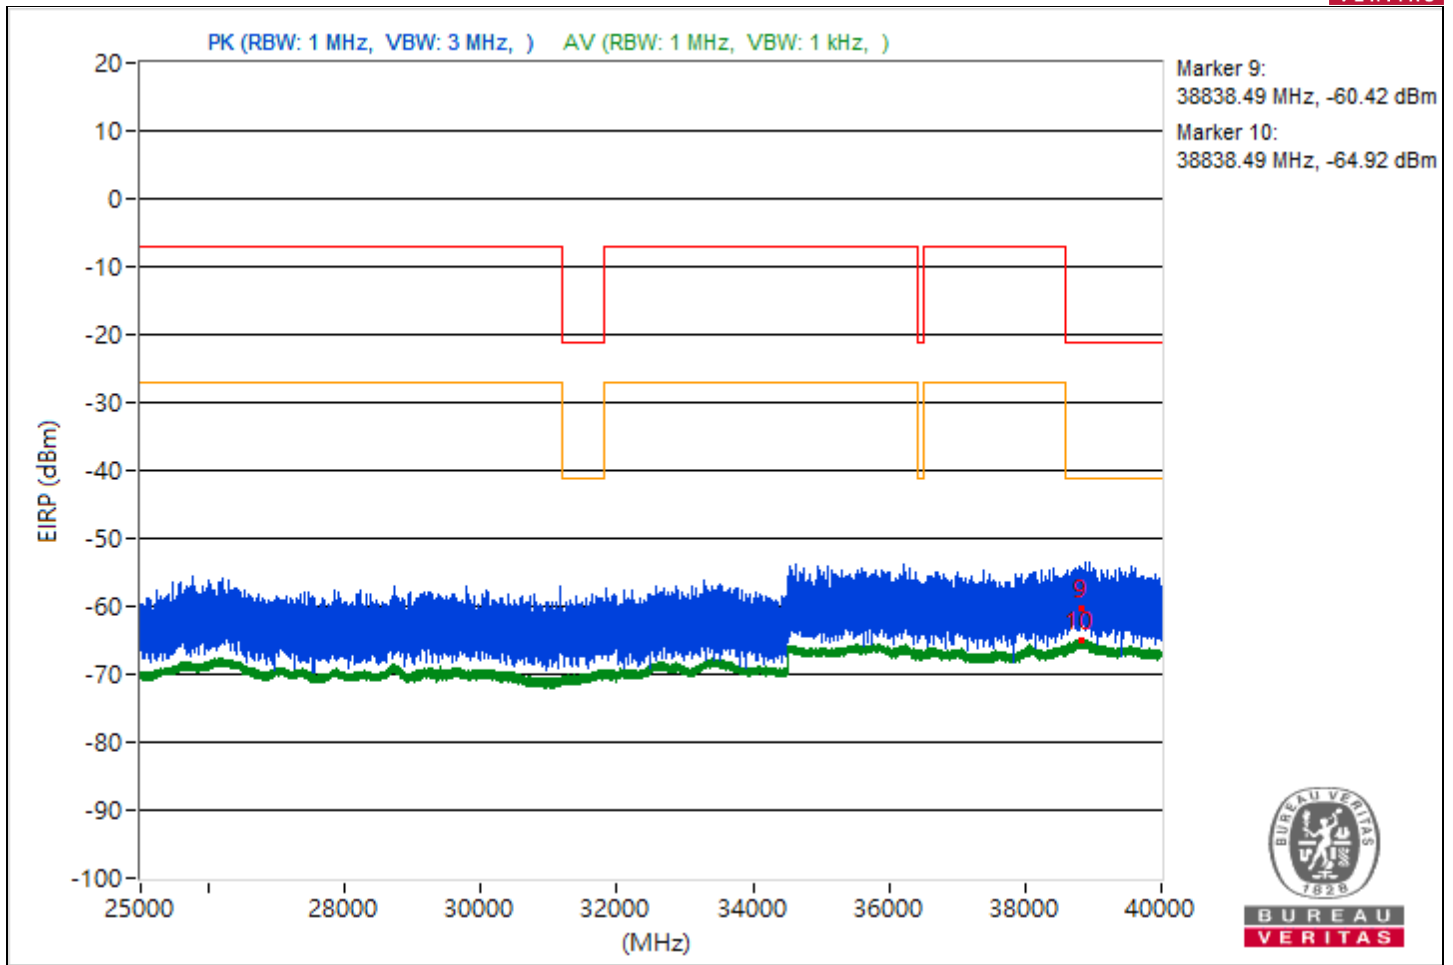


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.02	42.9 PK	74	-31.1	-57.28	4.92	-52.36
2	3809.02	34.49 AV	54	-19.51	-65.69	4.92	-60.77
3	14491.38	41.89 PK	74	-32.11	-58.29	4.92	-53.37
4	14491.38	33.47 AV	54	-20.53	-66.71	4.92	-61.79
5	21163	43.87 PK	74	-30.13	-56.31	4.92	-51.39
6	21163	35.43 AV	54	-18.57	-64.75	4.92	-59.83
7	23688.7	44.83 PK	74	-29.17	-55.35	4.92	-50.43
8	23688.7	36.84 AV	54	-17.16	-63.34	4.92	-58.42
9	38809.07	33.93 PK	74	-40.07	-66.25	4.92	-61.33
10	38809.07	30.54 AV	54	-23.46	-69.64	4.92	-64.72

Note: Margin value = Emission Level - Limit value

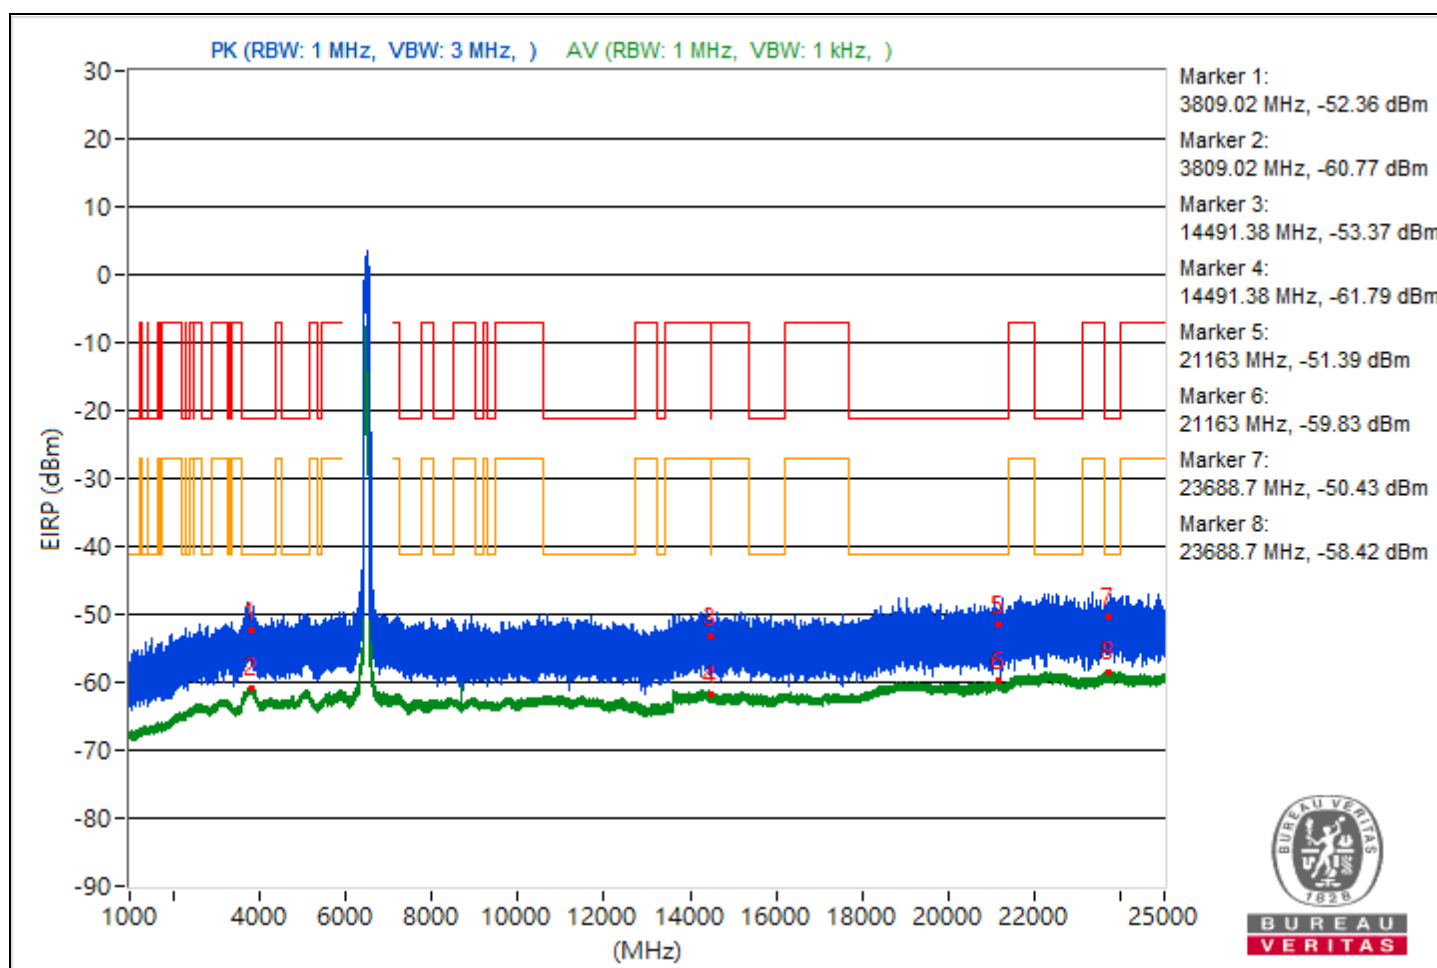


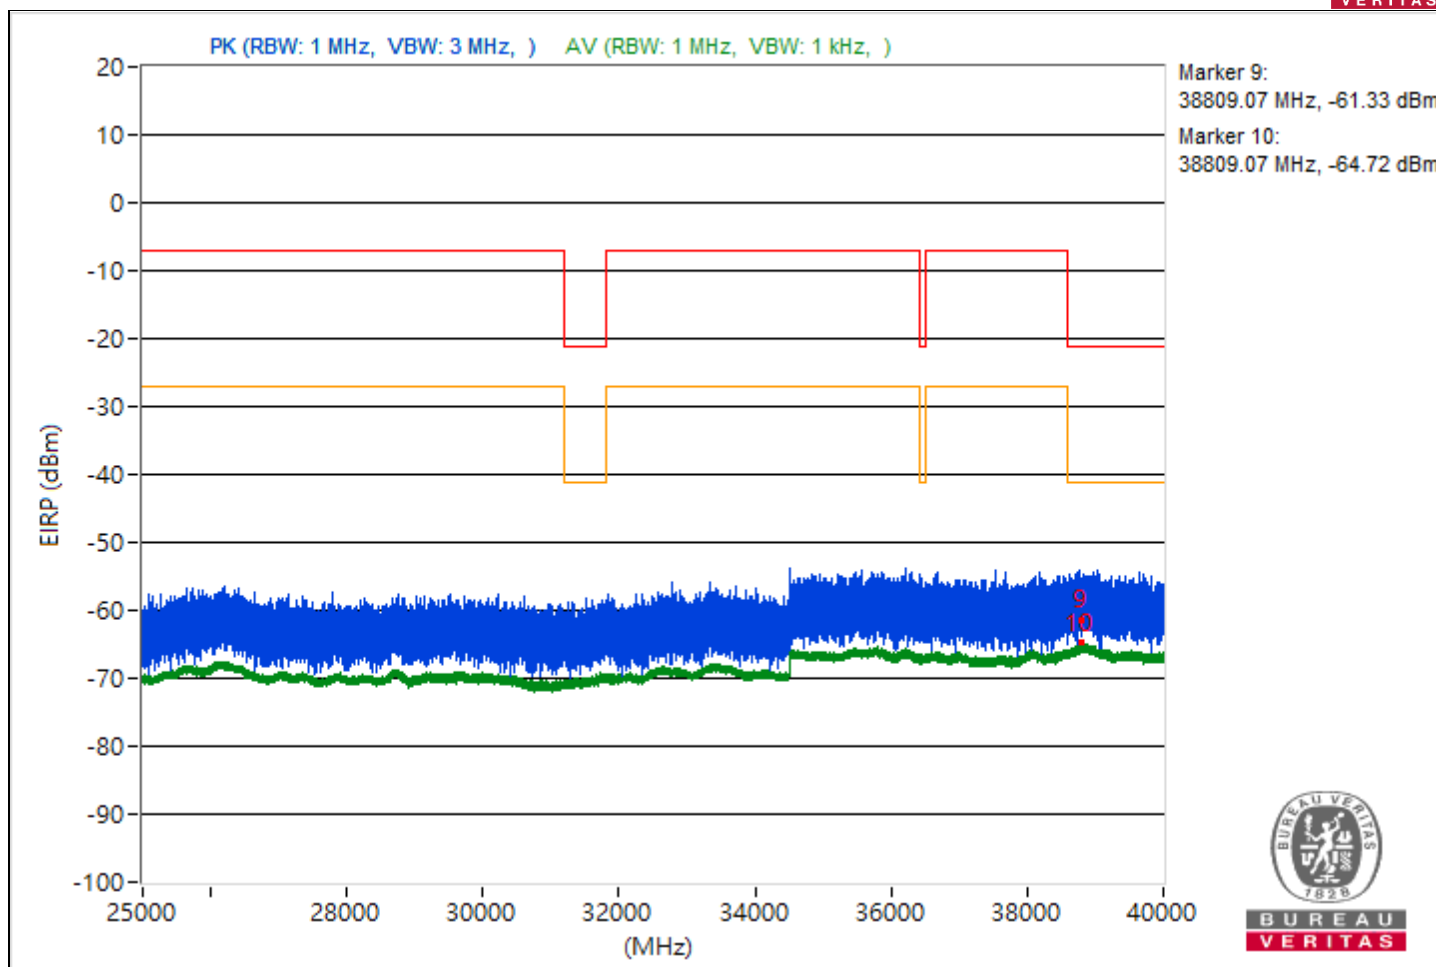


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.07	42.01 PK	74	-31.99	-58.17	4.92	-53.25
2	3820.07	34.68 AV	54	-19.32	-65.5	4.92	-60.58
3	14488.8	40.01 PK	74	-33.99	-60.17	4.92	-55.25
4	14488.8	33.65 AV	54	-20.35	-66.53	4.92	-61.61
5	20799.3	41.58 PK	74	-32.42	-58.6	4.92	-53.68
6	20799.3	35.39 AV	54	-18.61	-64.79	4.92	-59.87
7	22238.7	43.35 PK	74	-30.65	-56.83	4.92	-51.91
8	22238.7	36.77 AV	54	-17.23	-63.41	4.92	-58.49
9	38855.29	37.4 PK	74	-36.6	-62.78	4.92	-57.86
10	38855.29	30.45 AV	54	-23.55	-69.73	4.92	-64.81

Note: Margin value = Emission Level - Limit value

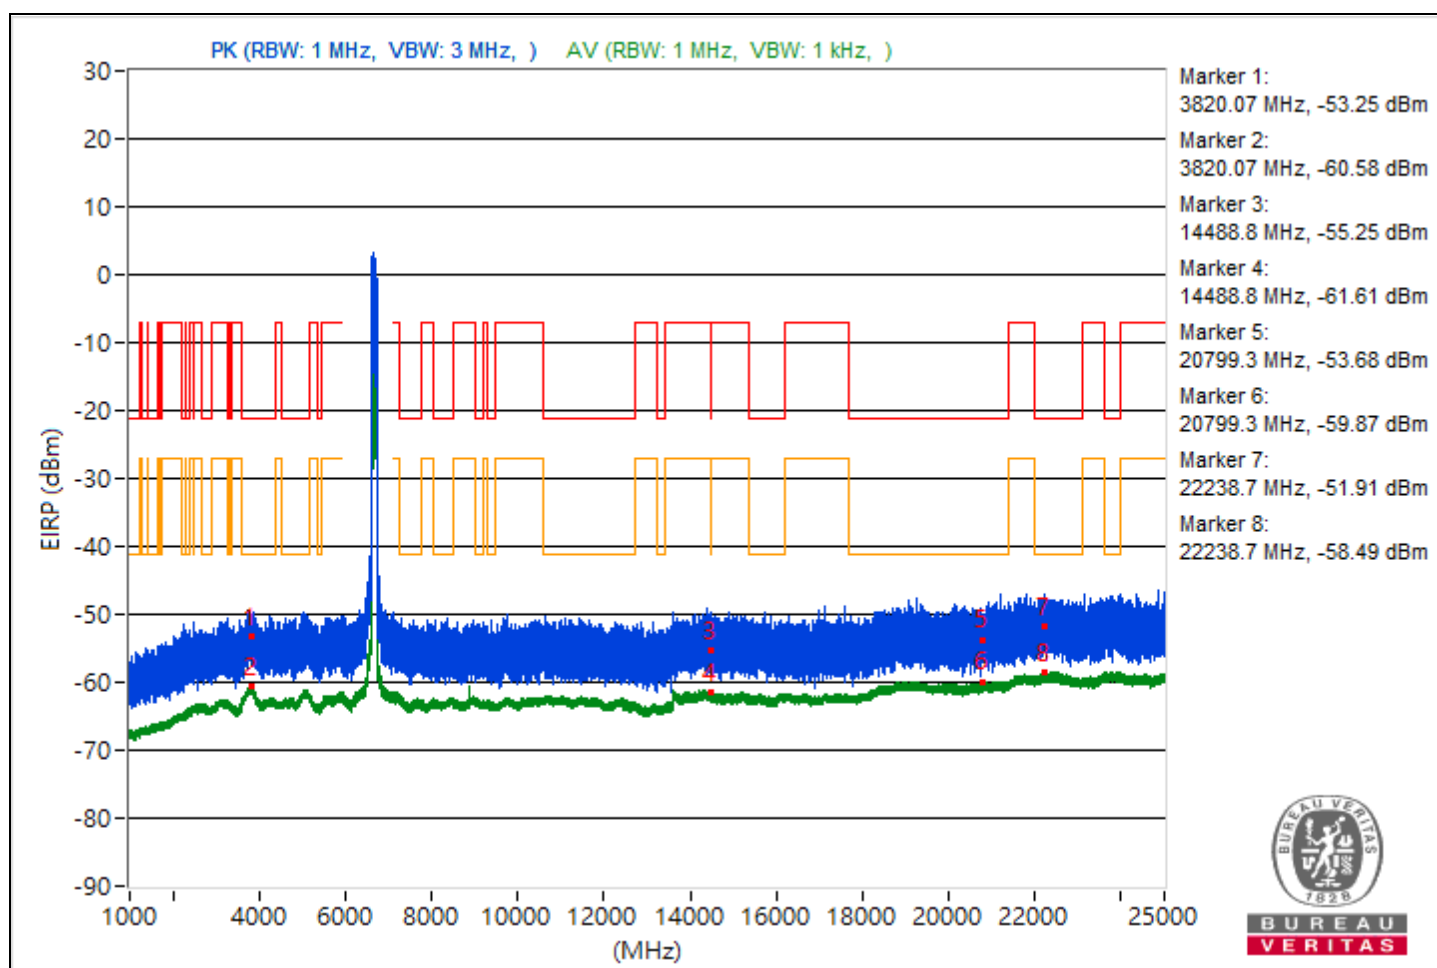

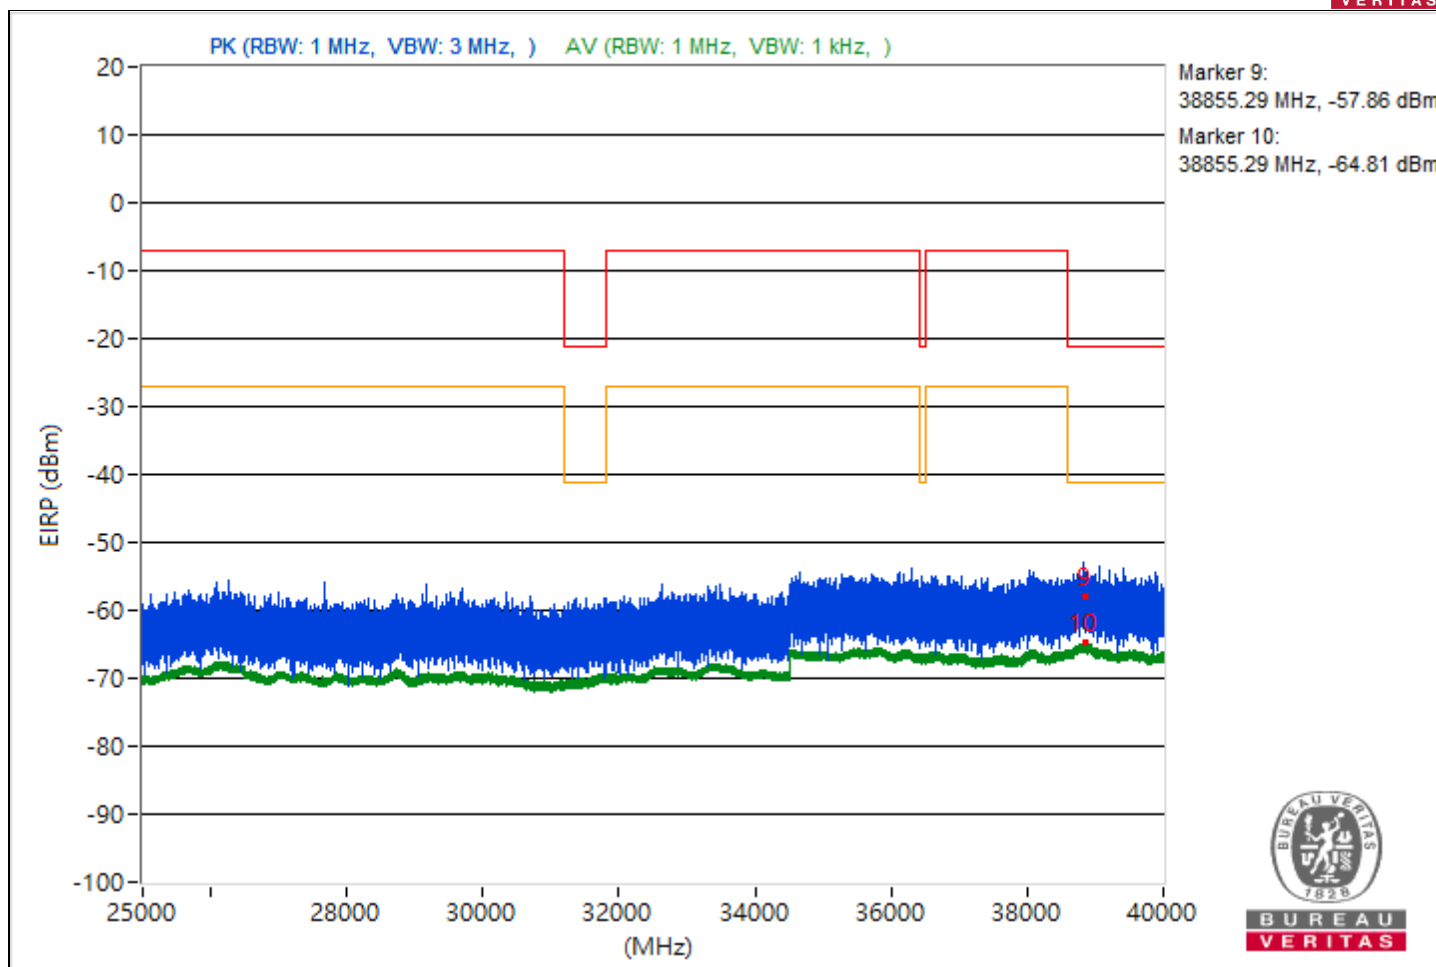



RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3784.91	42.09 PK	74	-31.91	-58.09	4.92	-53.17
2	3784.91	34.57 AV	54	-19.43	-65.61	4.92	-60.69
3	7279.08	41.38 PK	74	-32.62	-58.8	4.92	-53.88
4	7279.08	34.26 AV	54	-19.74	-65.92	4.92	-61
5	21135.3	42.24 PK	74	-31.76	-57.94	4.92	-53.02
6	21135.3	35.58 AV	54	-18.42	-64.6	4.92	-59.68
7	23920.9	44.64 PK	74	-29.36	-55.54	4.92	-50.62
8	23920.9	36.97 AV	54	-17.03	-63.21	4.92	-58.29
9	38841.24	39.71 PK	74	-34.29	-60.47	4.92	-55.55
10	38841.24	30.55 AV	54	-23.45	-69.63	4.92	-64.71

Note: Margin value = Emission Level - Limit value

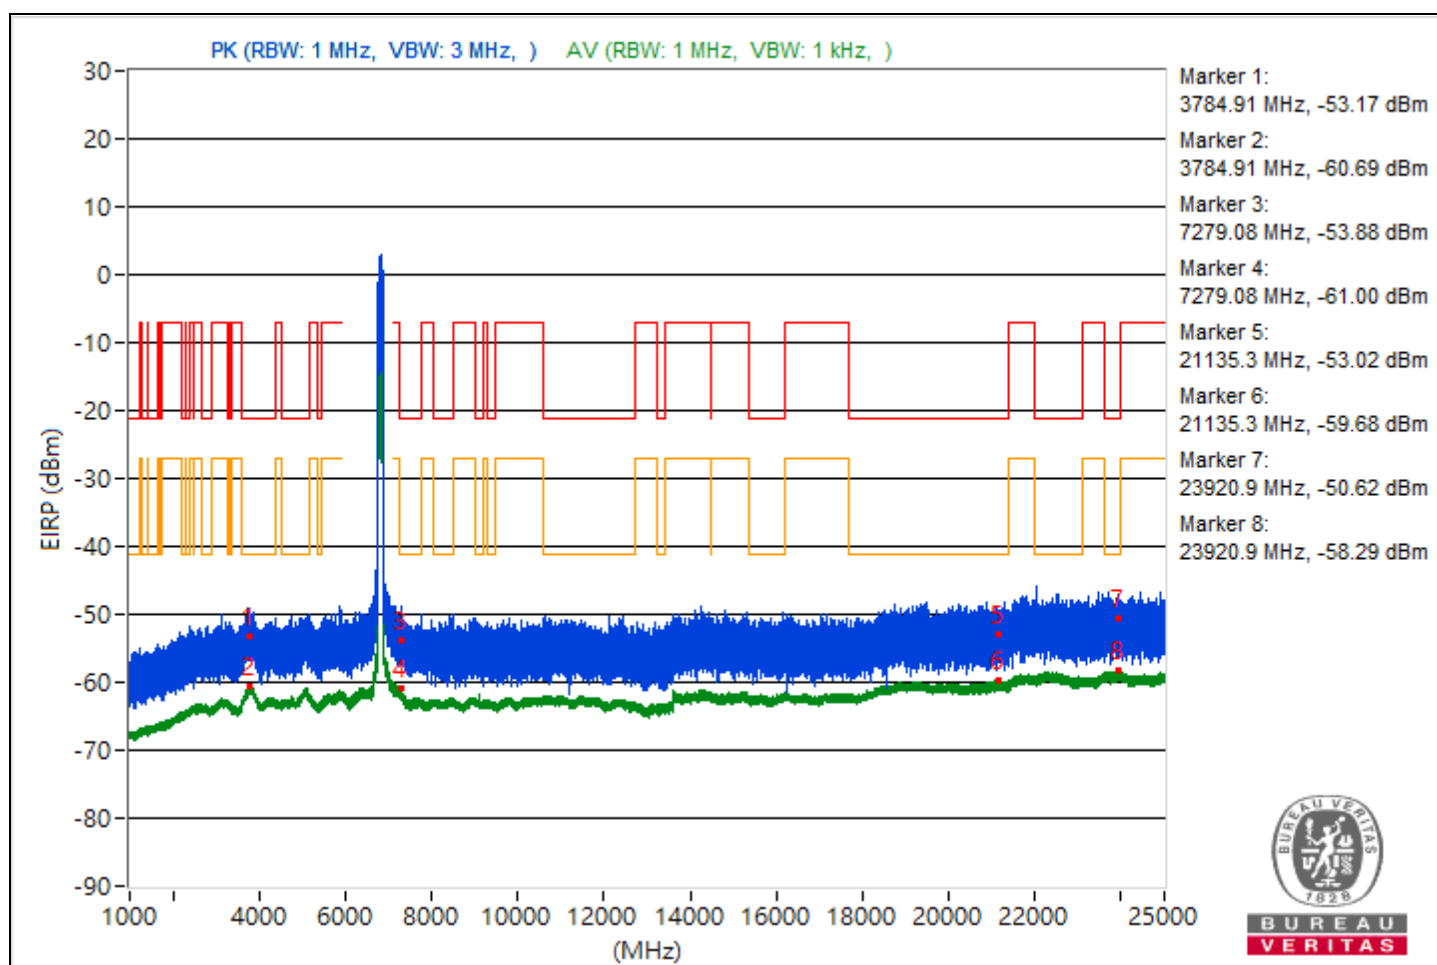

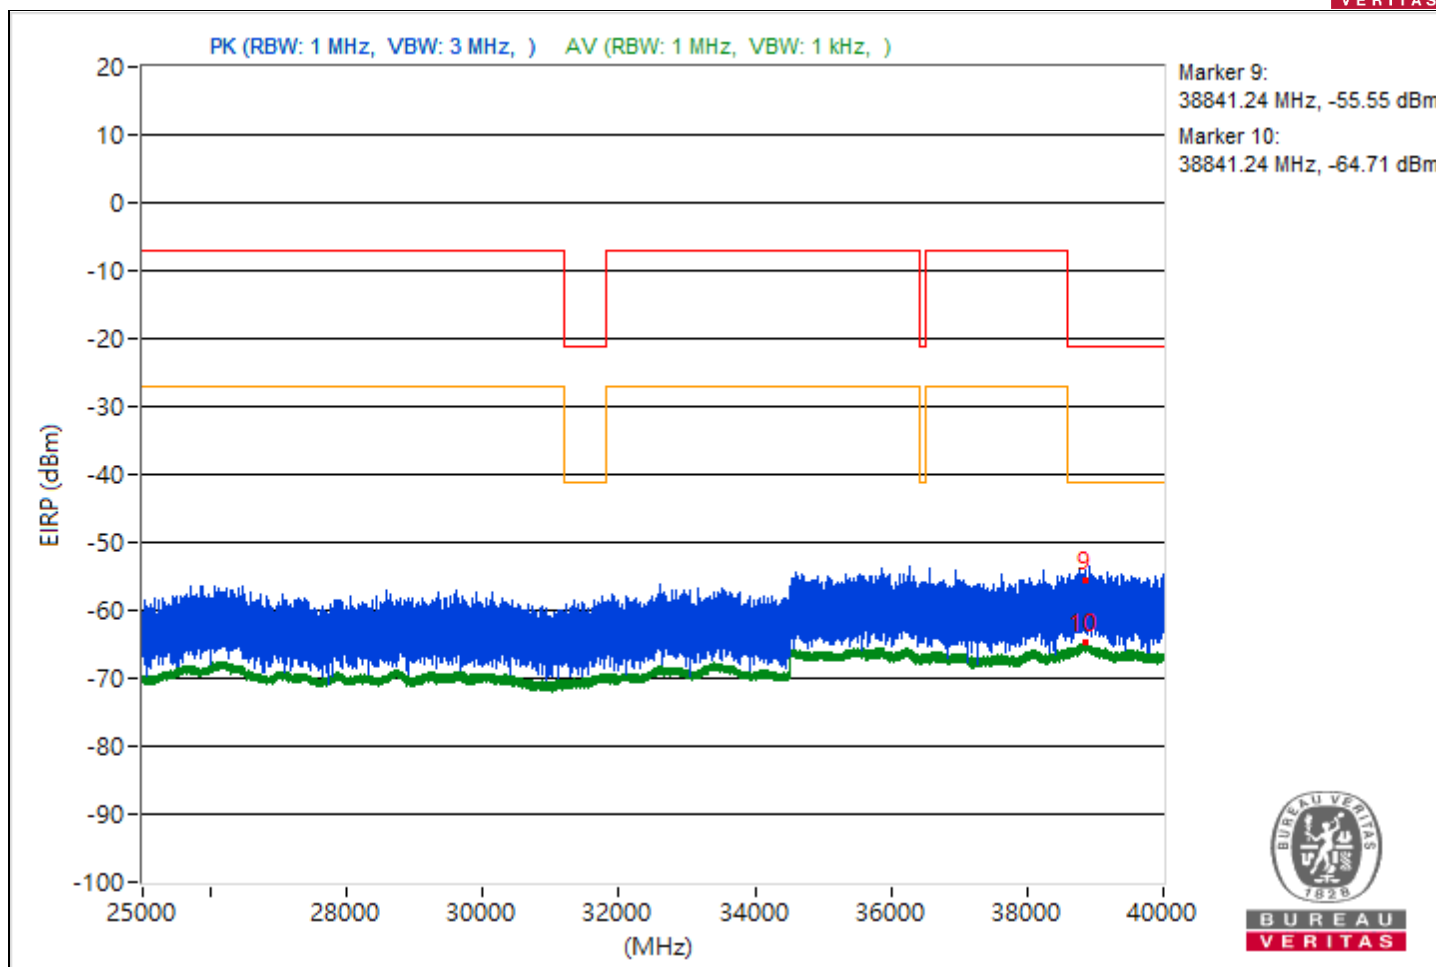



RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.92	44.05 PK	74	-29.95	-56.13	4.92	-51.21
2	3813.92	34.5 AV	54	-19.5	-65.68	4.92	-60.76
3	7253.57	41.38 PK	74	-32.62	-58.8	4.92	-53.88
4	7253.57	34.14 AV	54	-19.86	-66.04	4.92	-61.12
5	21368.4	43.77 PK	74	-30.23	-56.41	4.92	-51.49
6	21368.4	35.46 AV	54	-18.54	-64.72	4.92	-59.8
7	23778	42.88 PK	74	-31.12	-57.3	4.92	-52.38
8	23778	36.82 AV	54	-17.18	-63.36	4.92	-58.44
9	38825.51	42.1 PK	74	-31.9	-58.08	4.92	-53.16
10	38825.51	30.36 AV	54	-23.64	-69.82	4.92	-64.9

Note: Margin value = Emission Level - Limit value

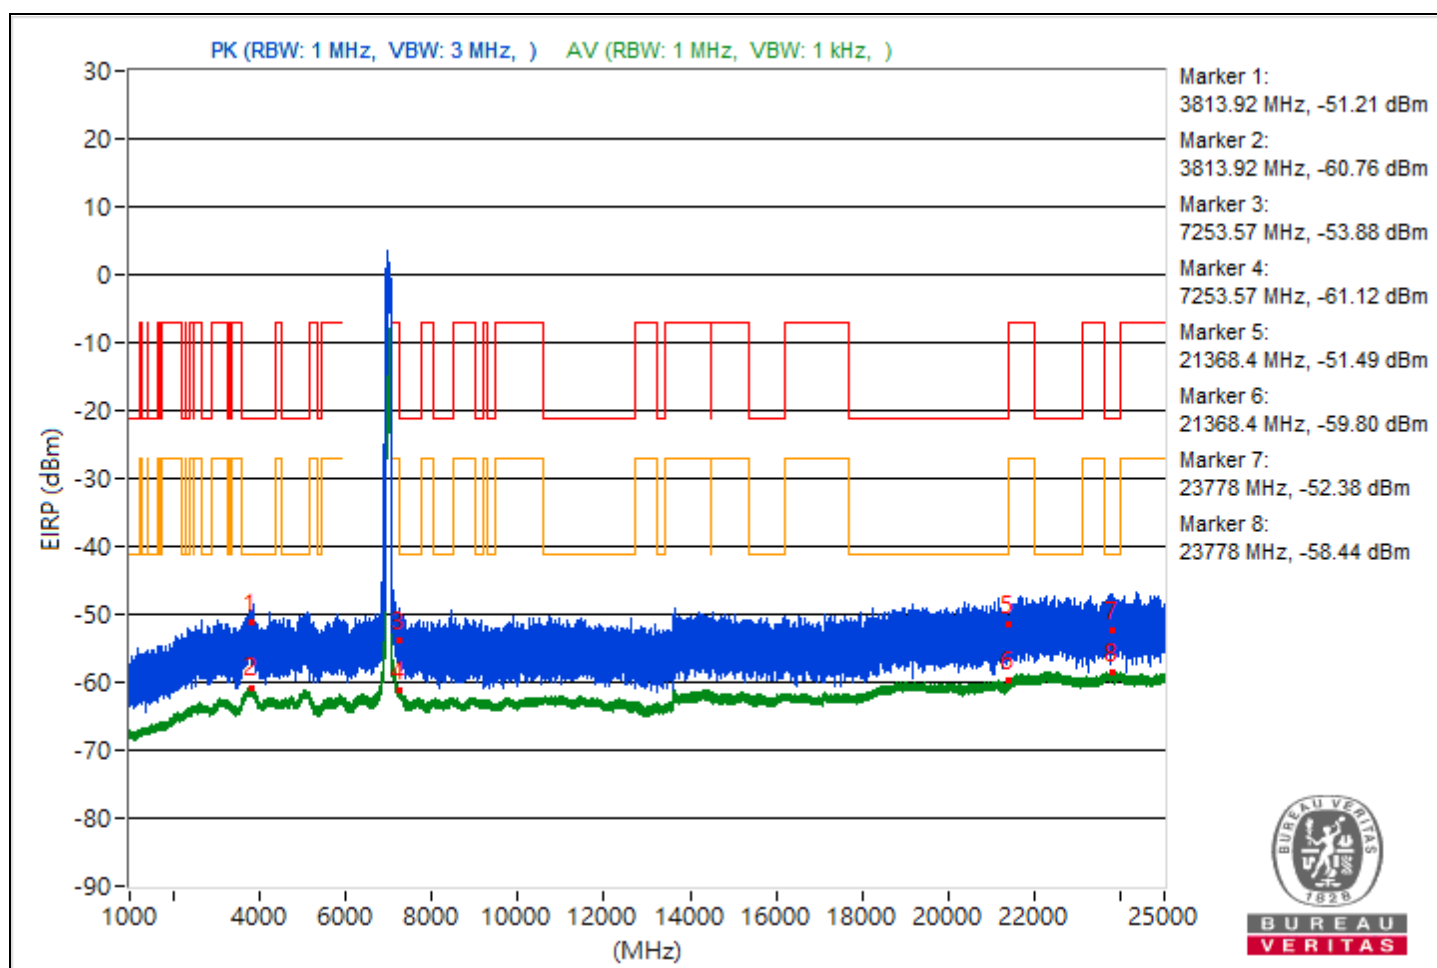

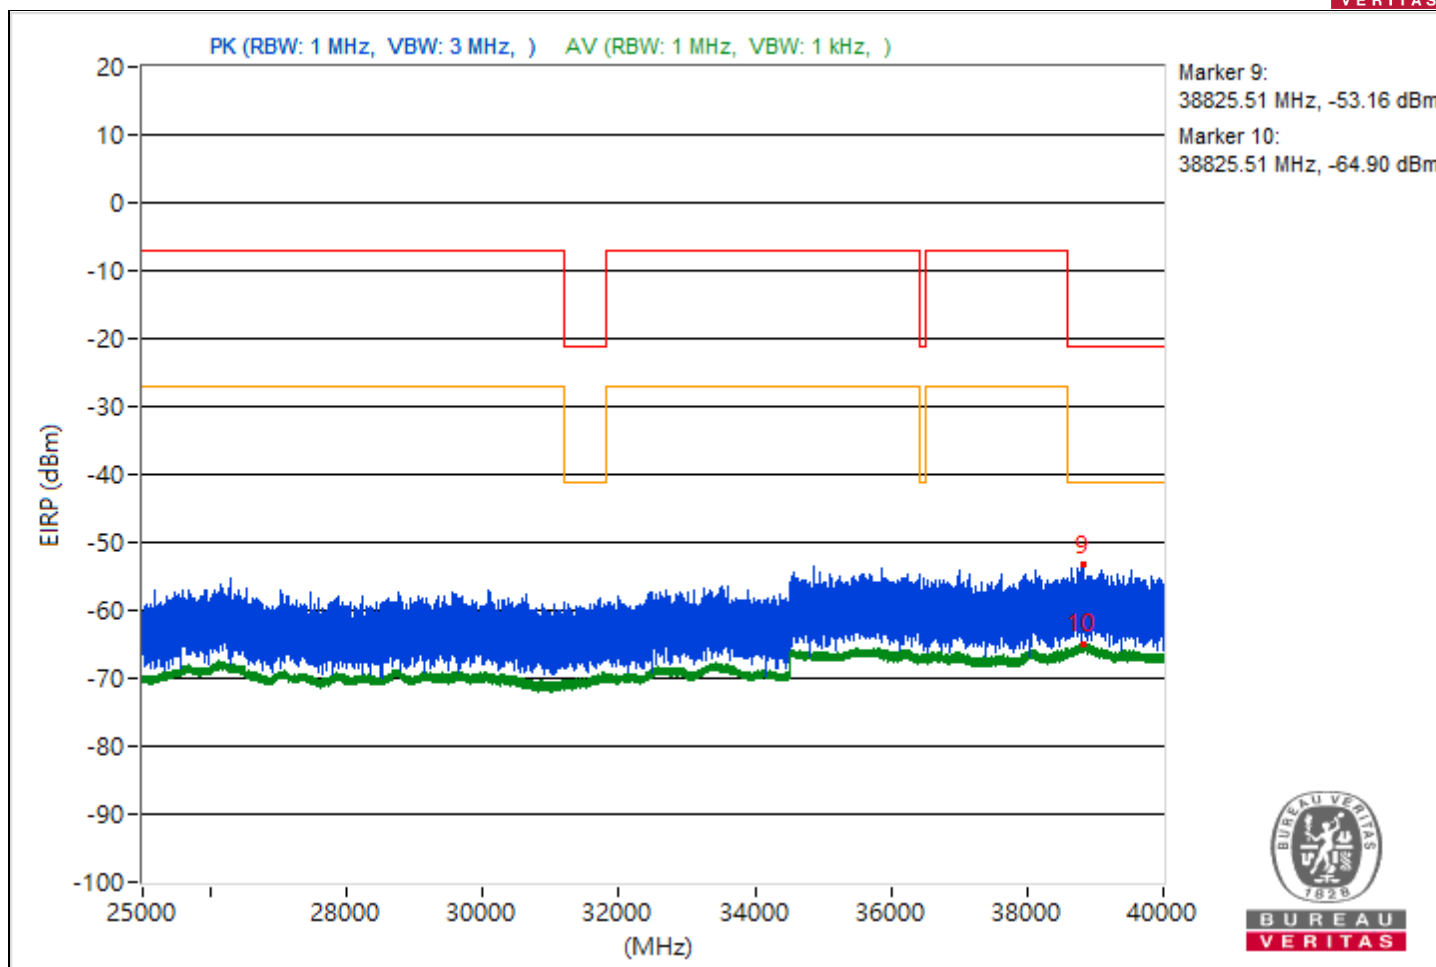

1T


Conducted Band Edges

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5955.95	96.96 PK			-3.06	4.76	1.7
2	*5955.95	89.06 AV			-10.96	4.76	-6.2
3	#5848.73	60.62 PK	88.26	-27.64	-39.4	4.76	-34.64
4	#5848.73	52.77 AV	68.26	-15.49	-47.25	4.76	-42.49

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

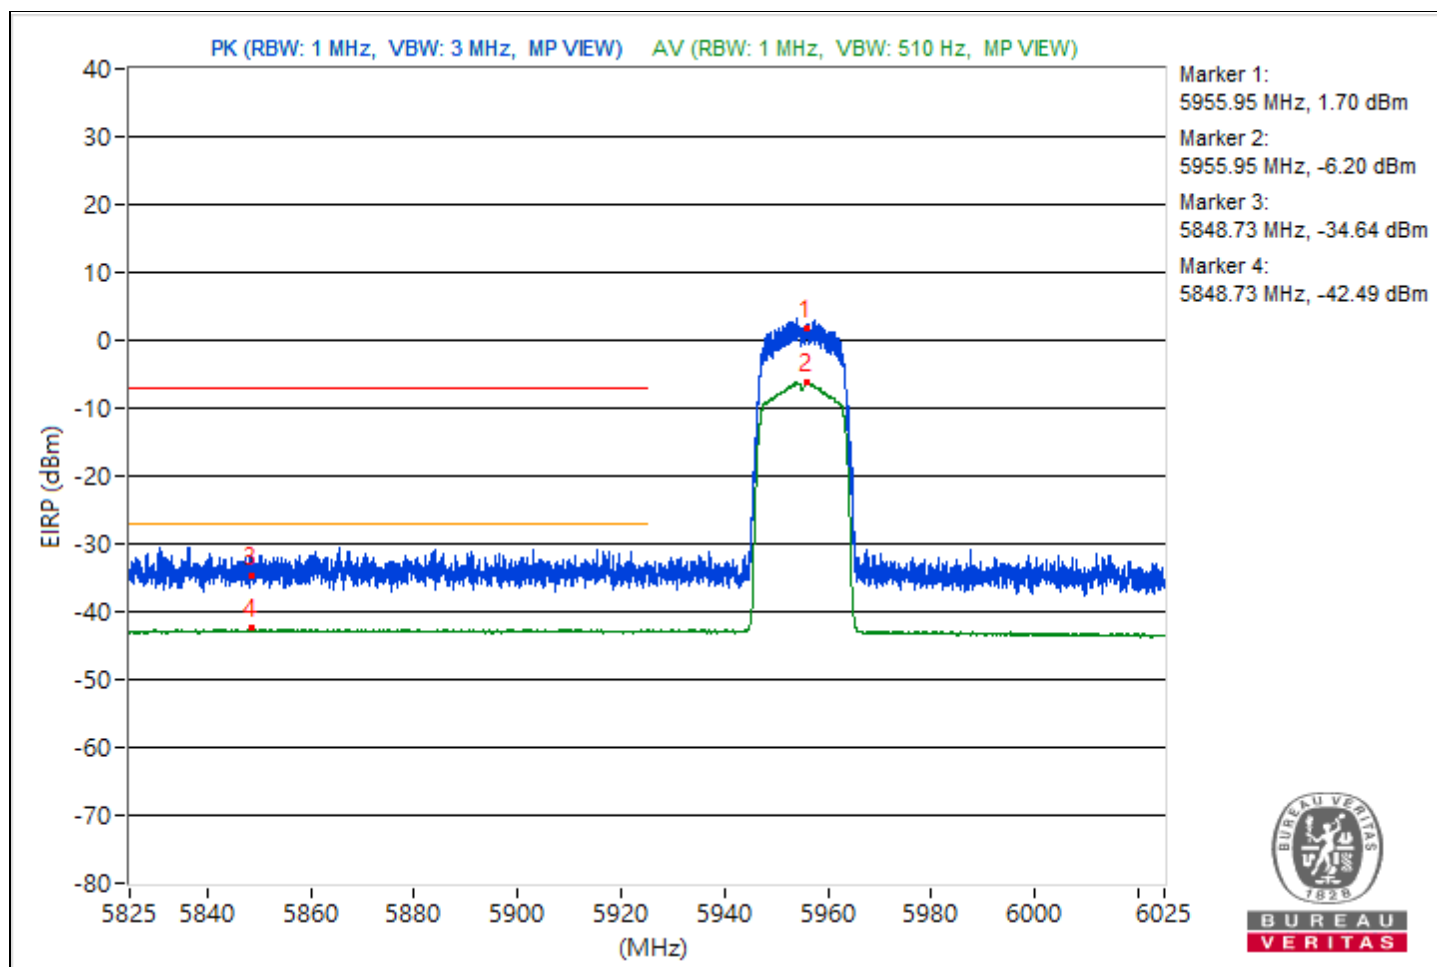


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7113.9	96.28 PK			-3.07	4.09	1.02
2	*7113.9	89.54 AV			-9.81	4.09	-5.72
3	#7125	68.97 PK	88.26	-19.29	-30.38	4.09	-26.29
4	#7125	47.61 AV	68.26	-20.65	-51.74	4.09	-47.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

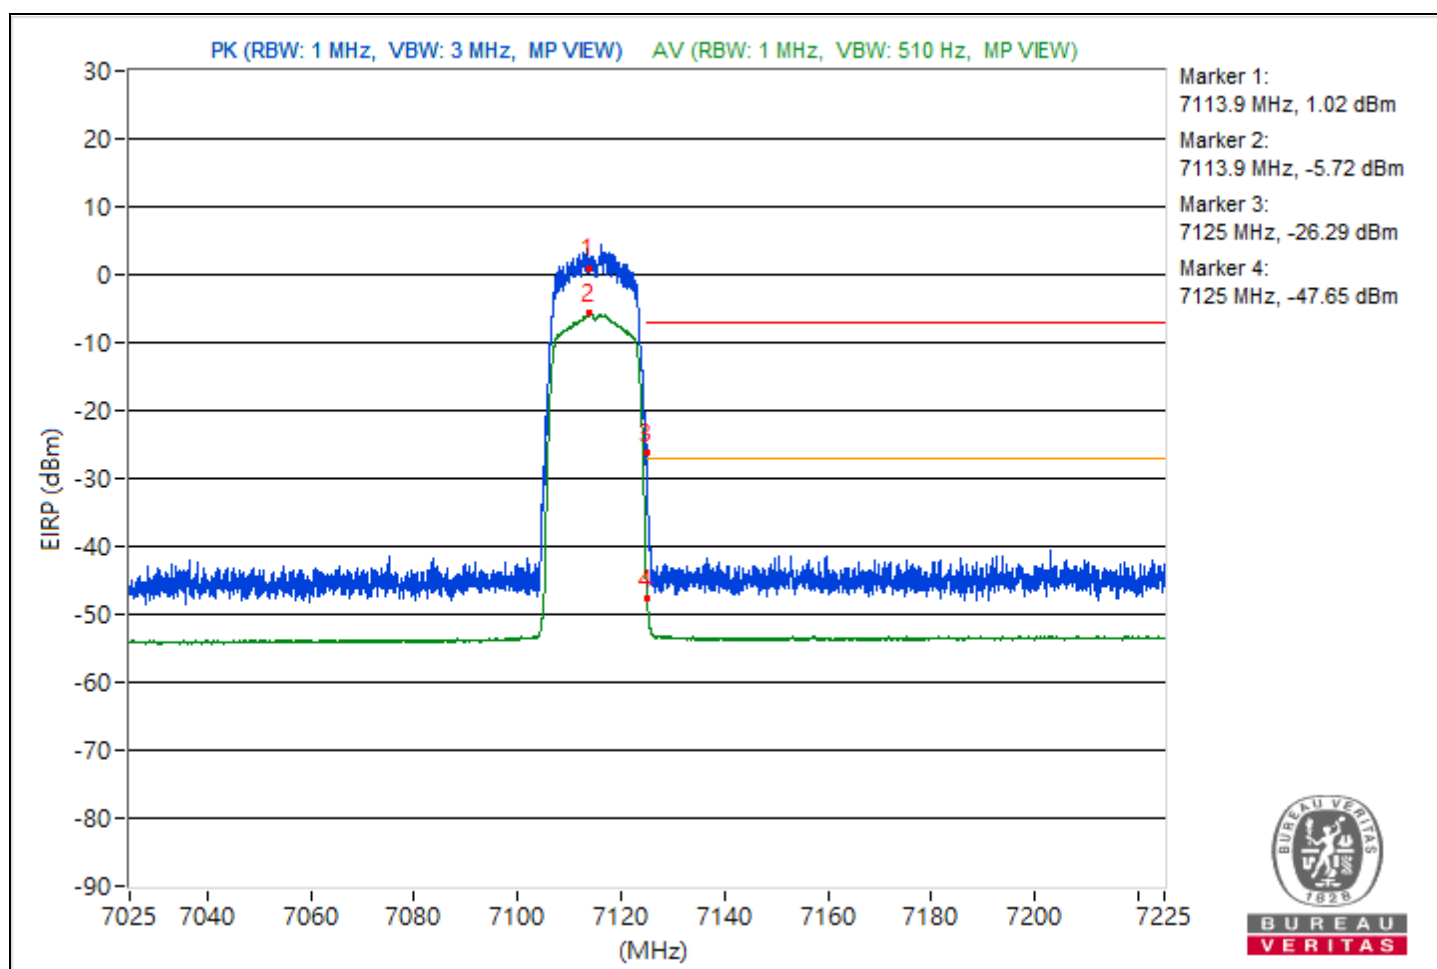


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954.07	98.14 PK			-1.88	4.76	2.88
2	*5954.07	88.69 AV			-11.33	4.76	-6.57
3	#5851.65	63.1 PK	88.26	-25.16	-36.92	4.76	-32.16
4	#5851.65	52.1 AV	68.26	-16.16	-47.92	4.76	-43.16

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

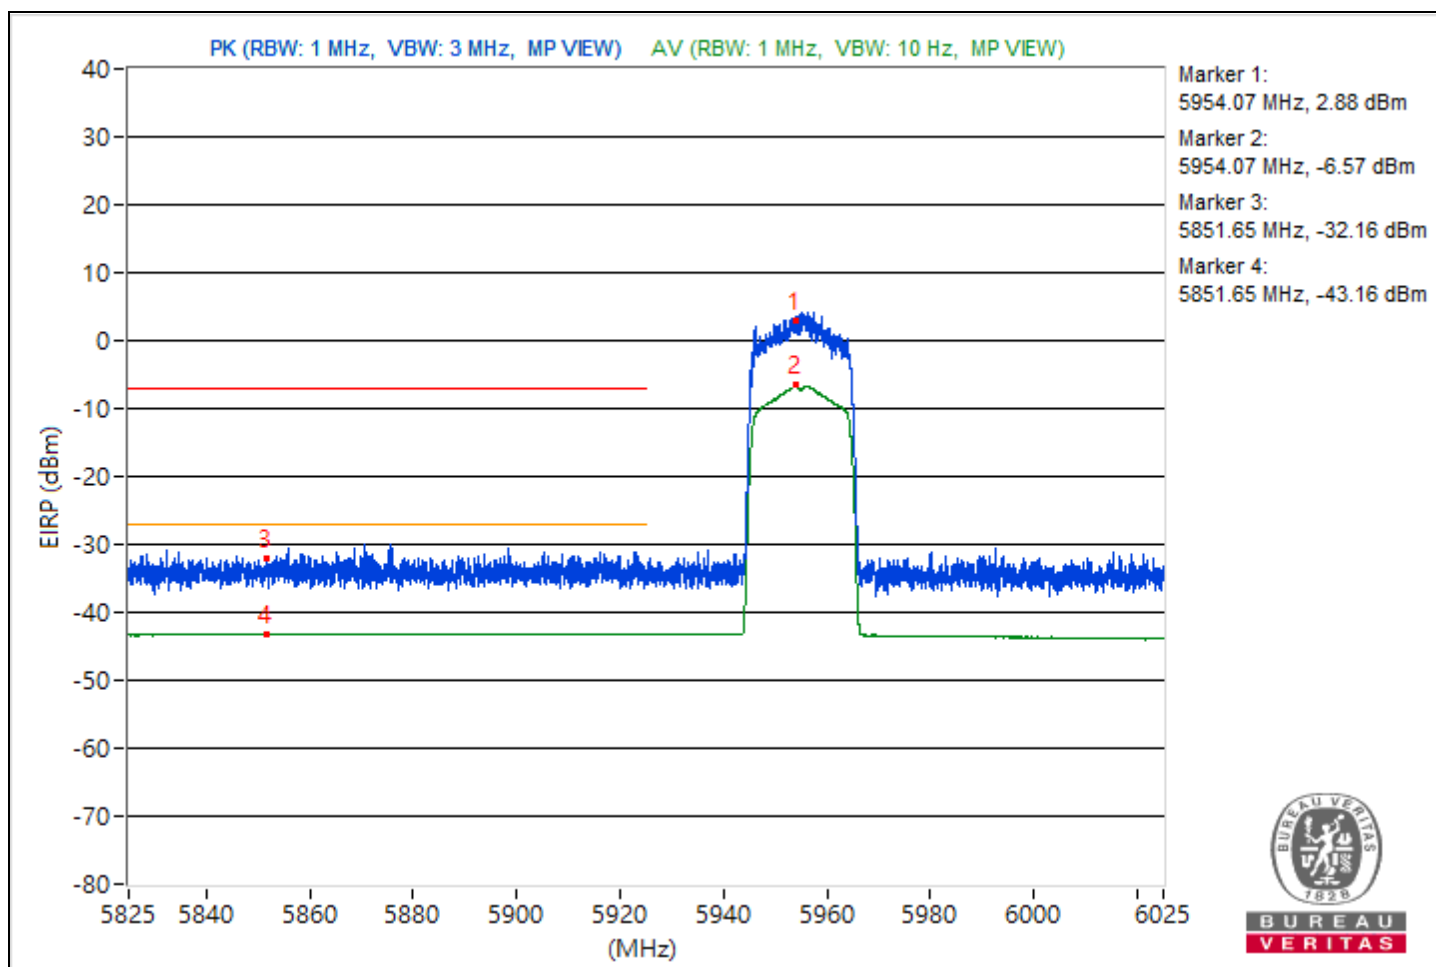

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Chun		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7114.12	95 PK			-4.35	4.09	-0.26
2	*7114.12	88.67 AV			-10.68	4.09	-6.59
3	#7125	85.9 PK	88.26	-2.36	-13.45	4.09	-9.36
4	!#7125	78.58 AV	68.26	10.32	-20.77	4.09	-16.68

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.
 4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer Integration method)

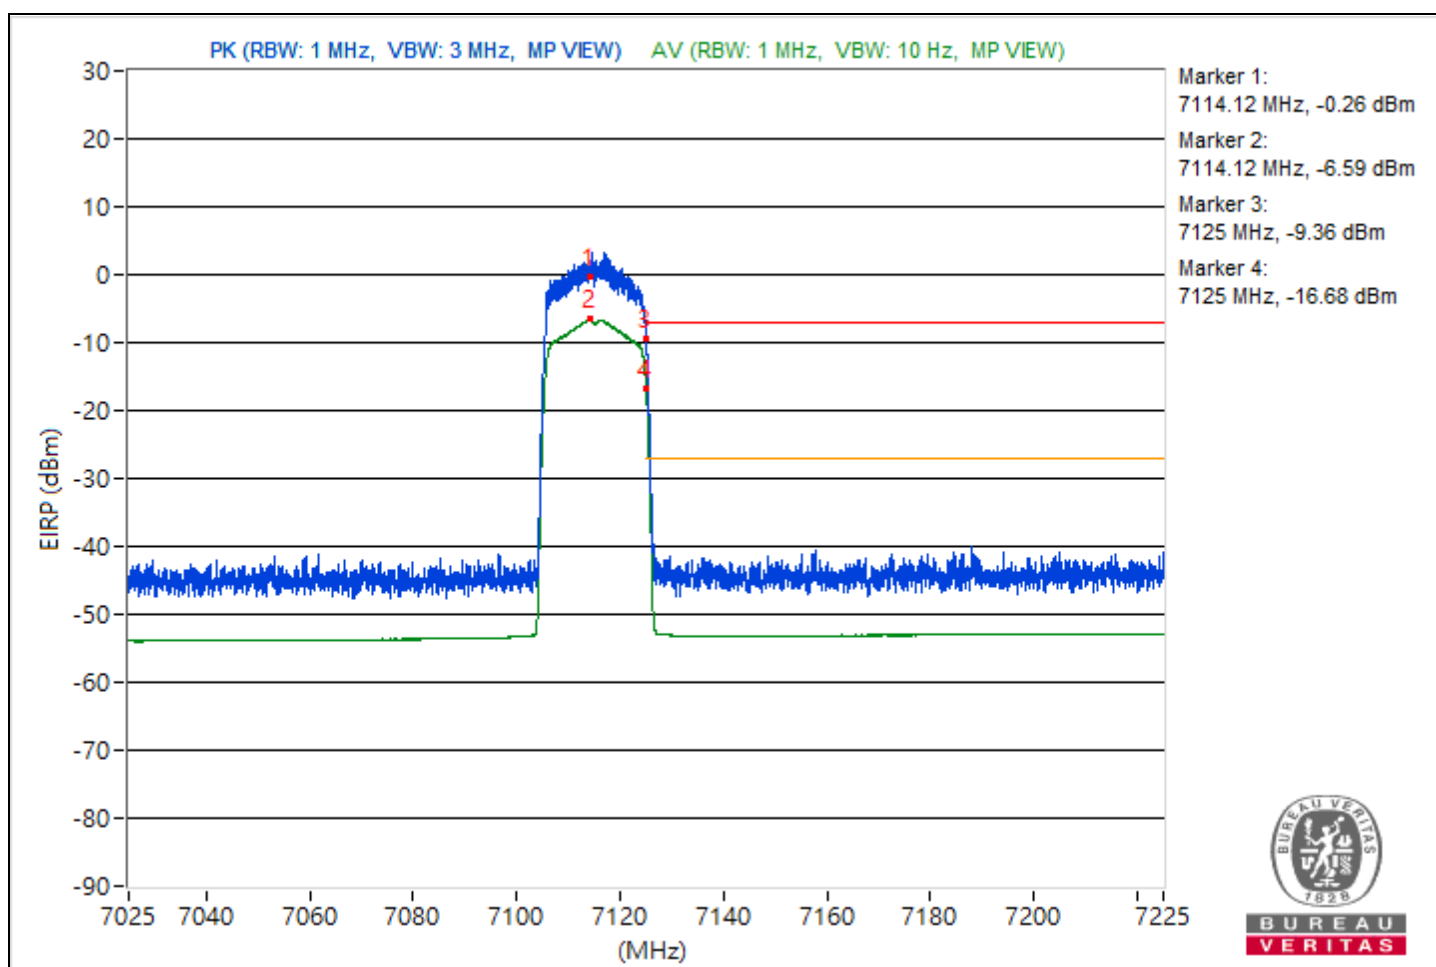


Integration method

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Katina Lu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	42.18 AV	68.2	-26.02	-57.17	4.09	-53.08

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

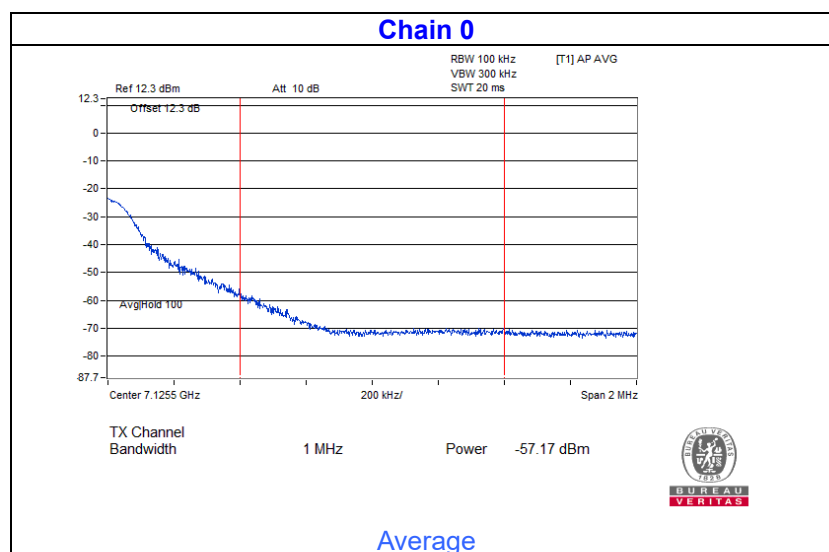


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5966.23	97.82 PK			-2.2	4.76	2.56
2	*5966.23	88.79 AV			-11.23	4.76	-6.47
3	#5862.52	63.18 PK	88.26	-25.08	-36.84	4.76	-32.08
4	#5862.52	52.13 AV	68.26	-16.13	-47.89	4.76	-43.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

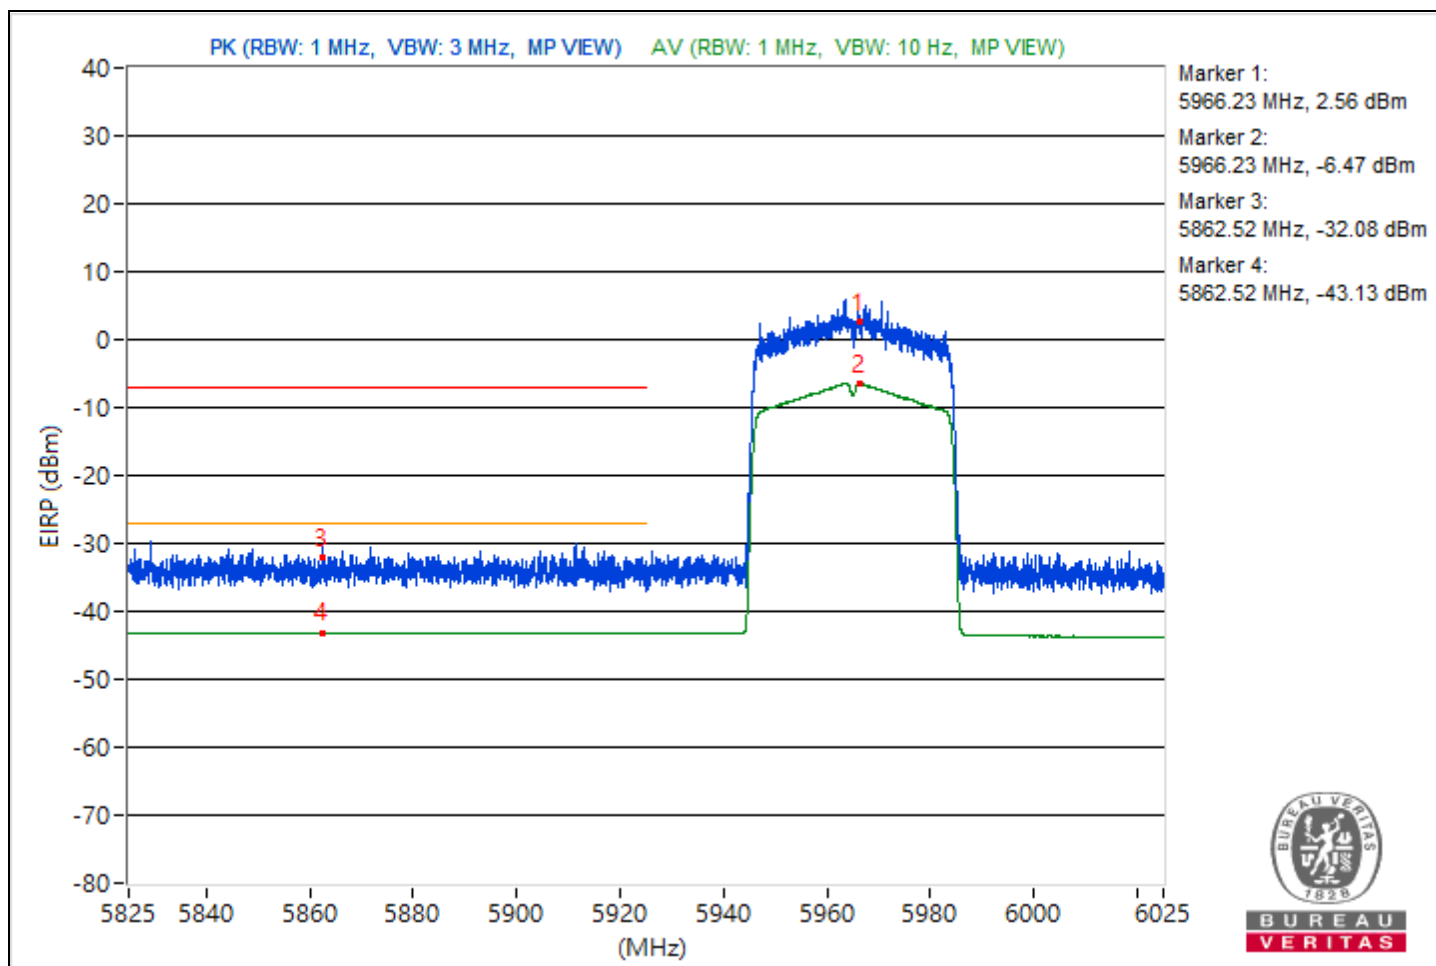


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7083.75	98.75 PK			-0.6	4.09	3.49
2	*7083.75	89.02 AV			-10.33	4.09	-6.24
3	#7203.07	50.77 PK	88.26	-37.49	-48.58	4.09	-44.49
4	#7203.07	41.9 AV	68.26	-26.36	-57.45	4.09	-53.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

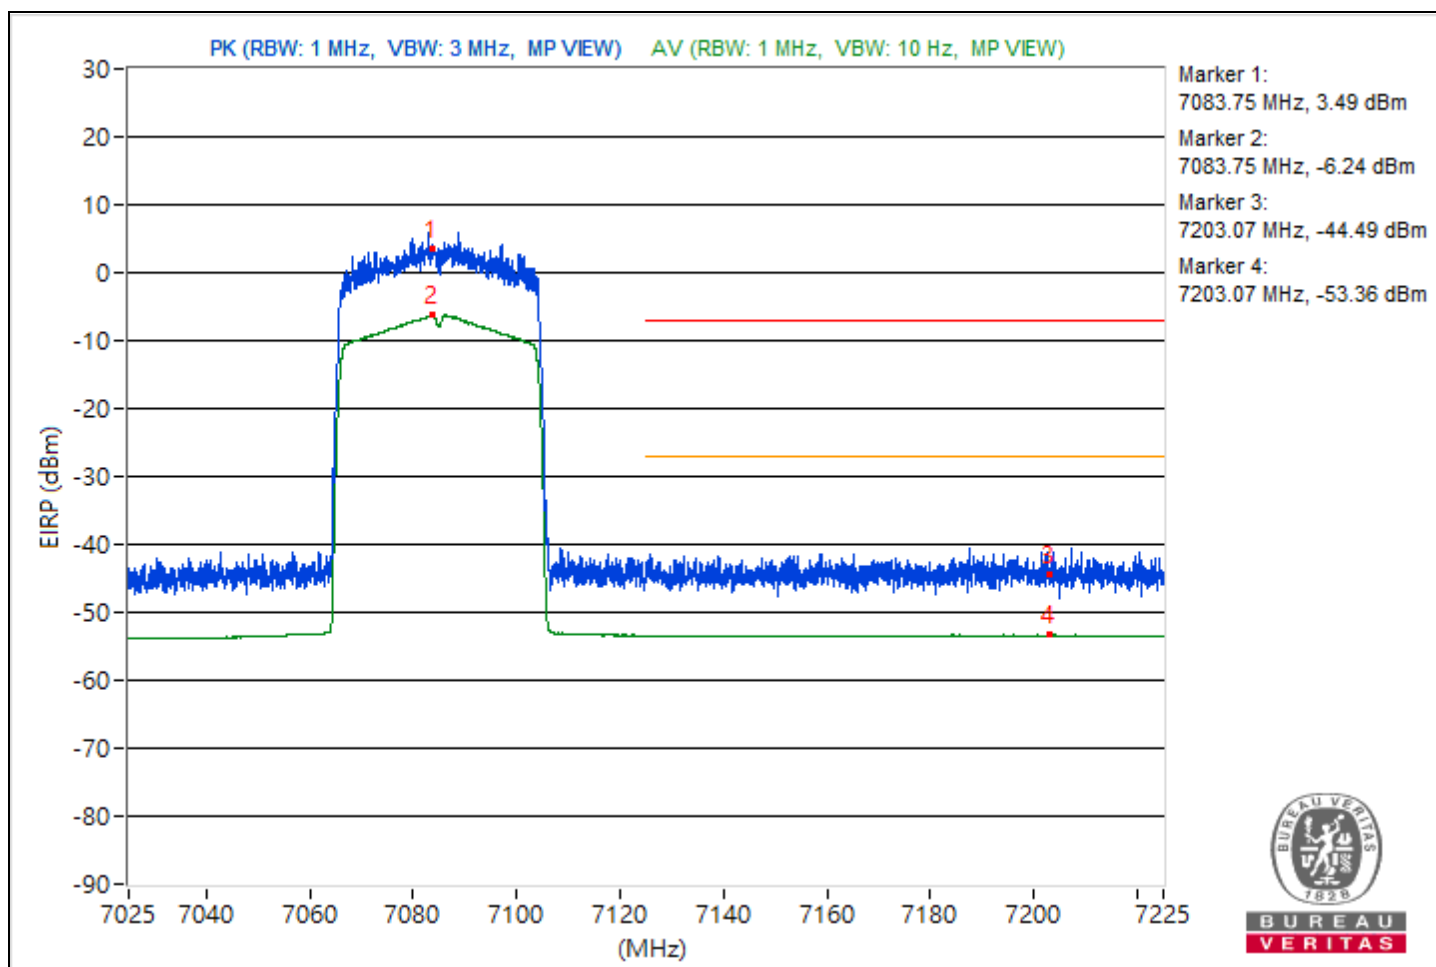


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5983.35	98.25 PK			-1.77	4.76	2.99
2	*5983.35	89.12 AV			-10.9	4.76	-6.14
3	#5854.82	59.55 PK	88.26	-28.71	-40.47	4.76	-35.71
4	#5854.82	52.84 AV	68.26	-15.42	-47.18	4.76	-42.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

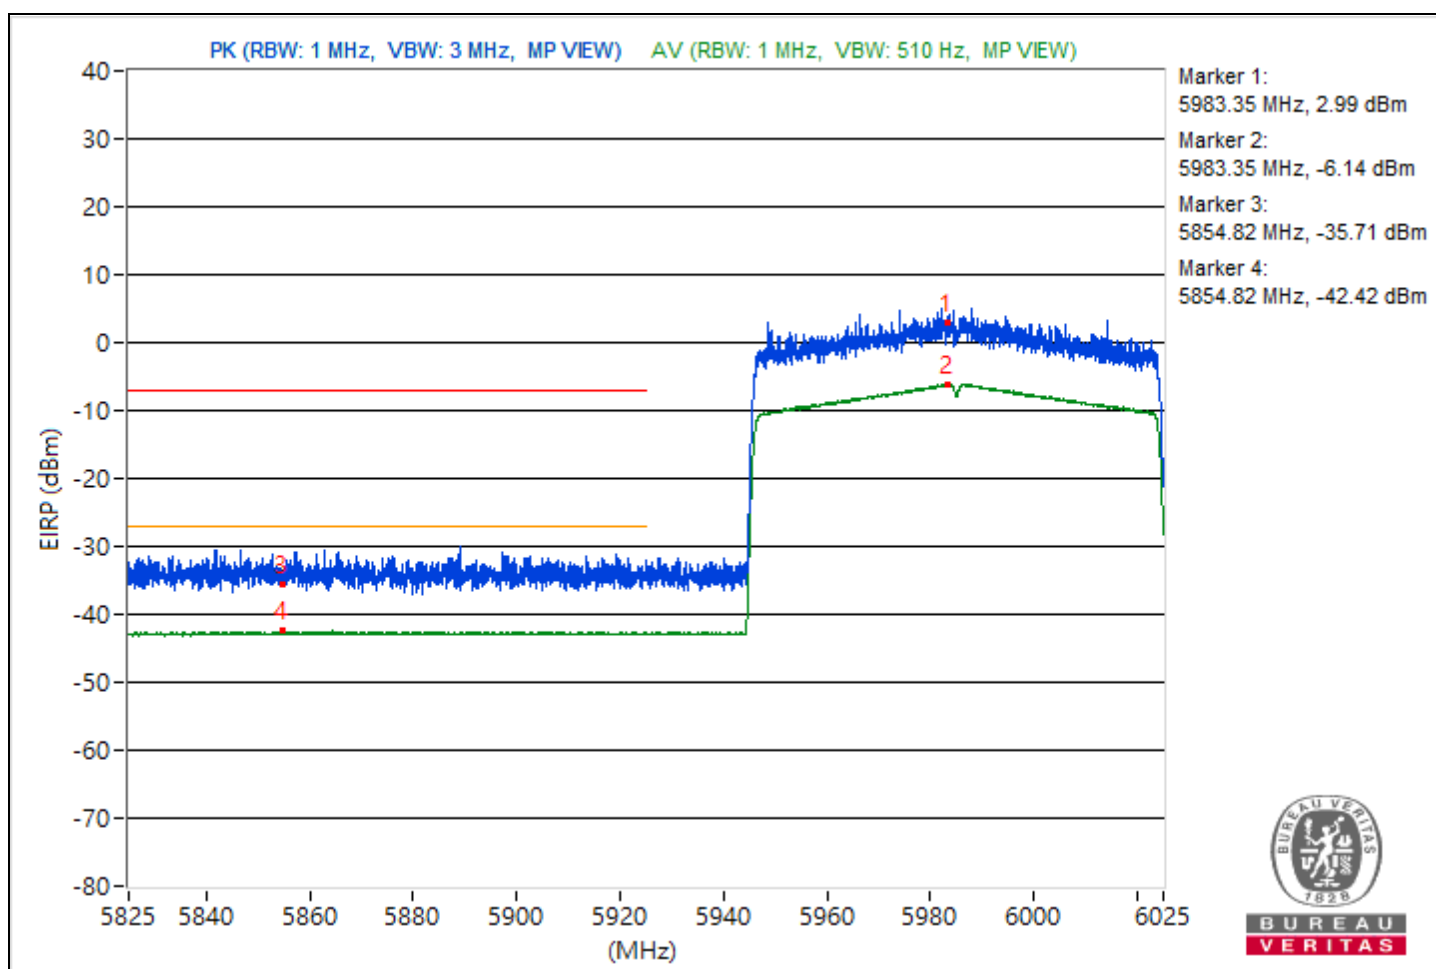


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7026.7	98.09 PK			-1.26	4.09	2.83
2	*7026.7	89.63 AV			-9.72	4.09	-5.63
3	#7191.15	52.56 PK	88.26	-35.7	-46.79	4.09	-42.7
4	#7191.15	42.32 AV	68.26	-25.94	-57.03	4.09	-52.94

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

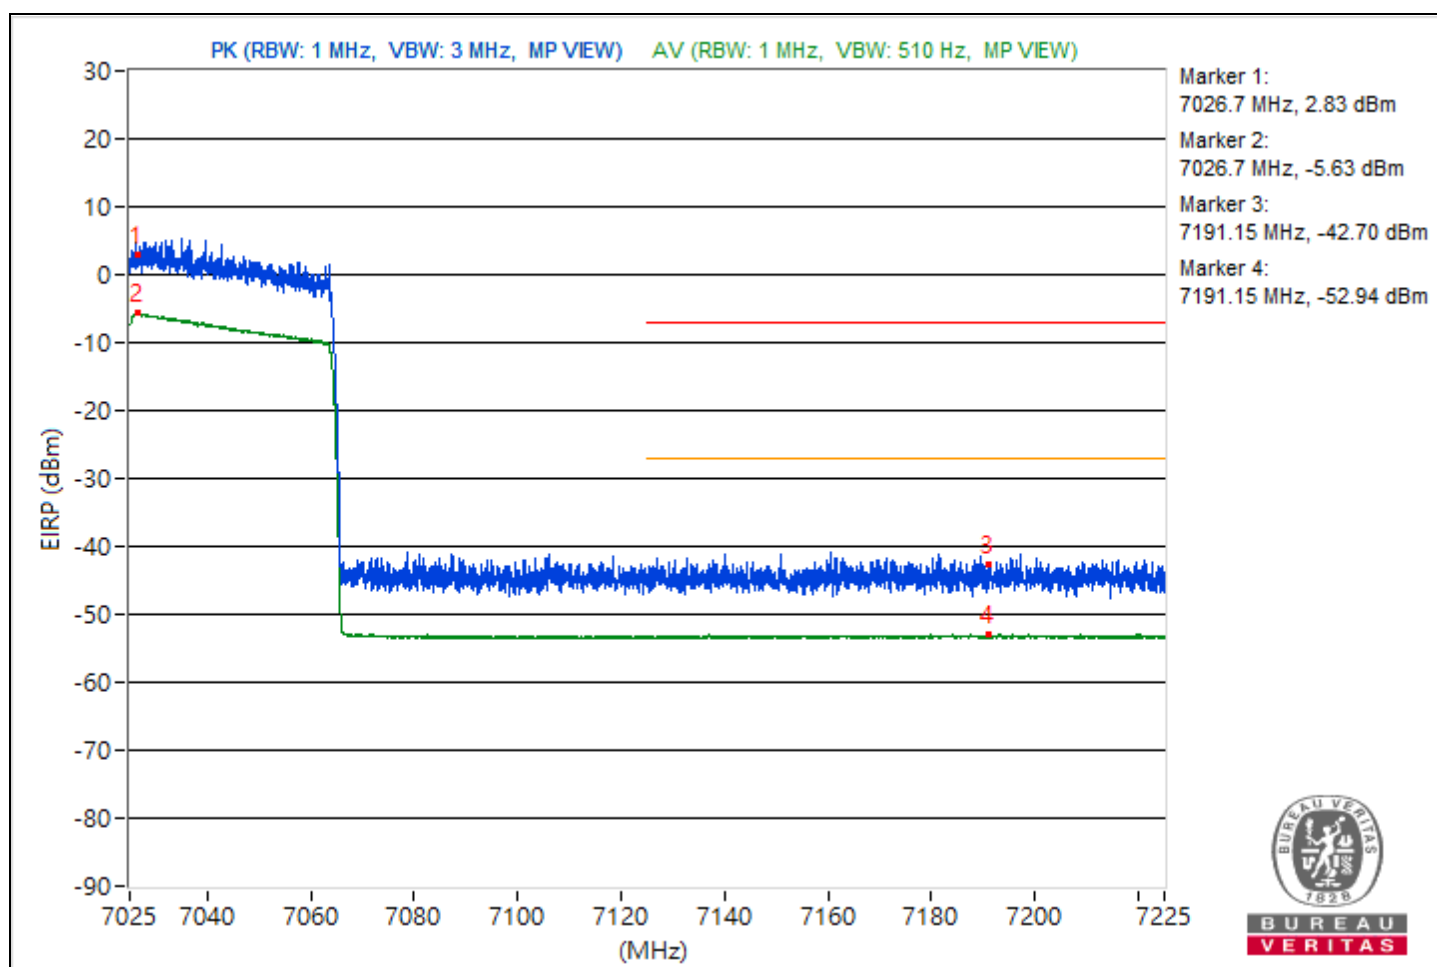


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.48	96.19 PK			-3.83	4.76	0.93
2	*6022.48	89.27 AV			-10.75	4.76	-5.99
3	#5908.5	59.82 PK	88.26	-28.44	-40.2	4.76	-35.44
4	#5908.5	52.99 AV	68.26	-15.27	-47.03	4.76	-42.27

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

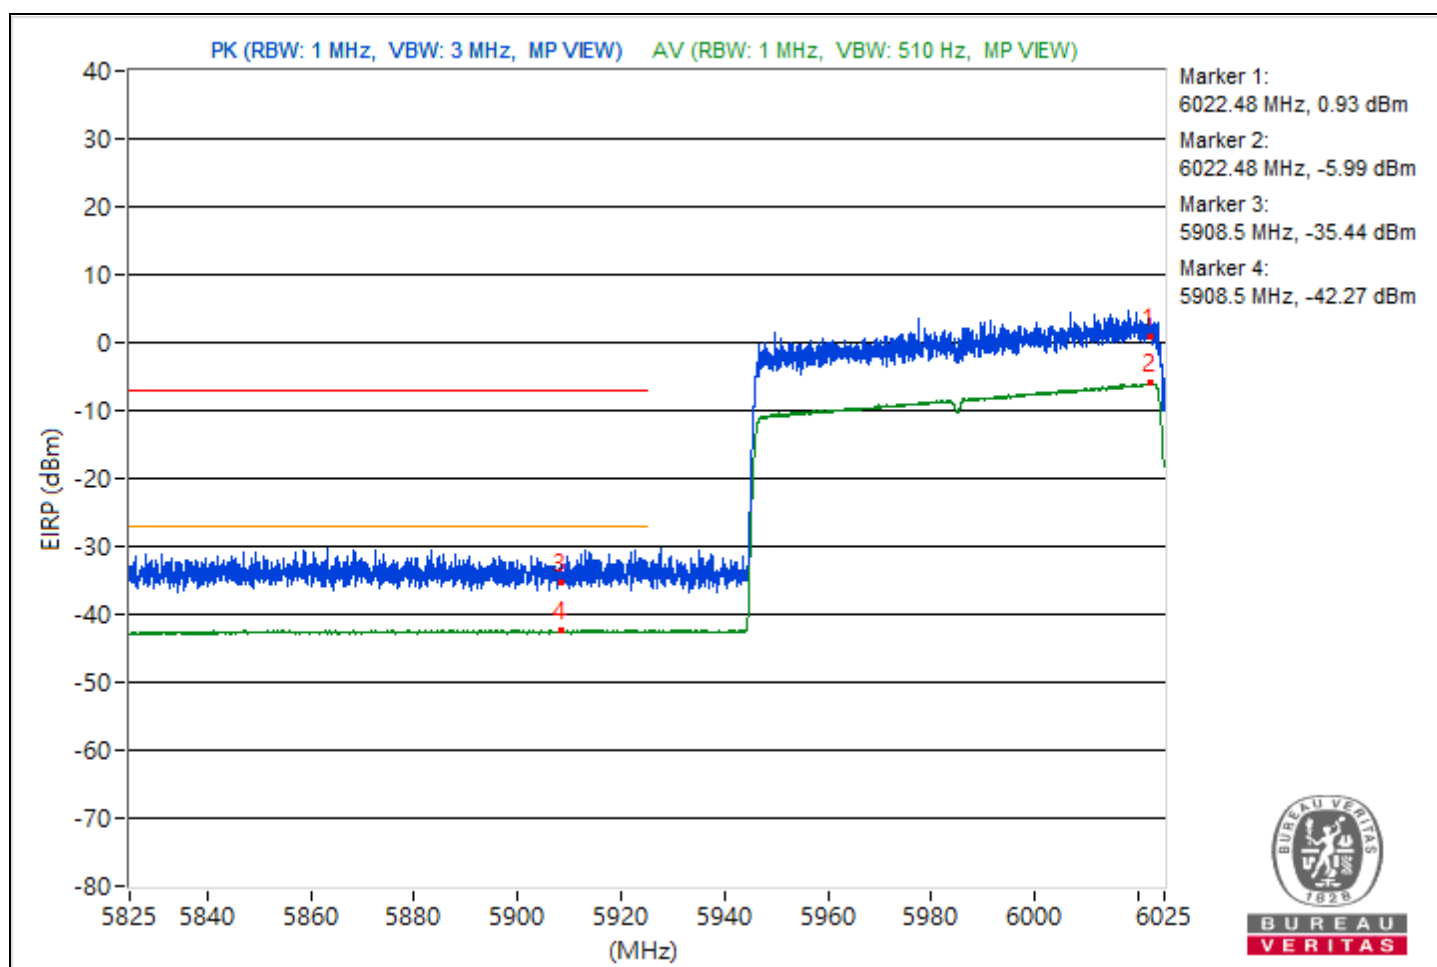


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7028.05	94.99 PK			-4.36	4.09	-0.27
2	*7028.05	86.76 AV			-12.59	4.09	-8.5
3	#7132.4	52.04 PK	88.26	-36.22	-47.31	4.09	-43.22
4	#7132.4	44.4 AV	68.26	-23.86	-54.95	4.09	-50.86

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

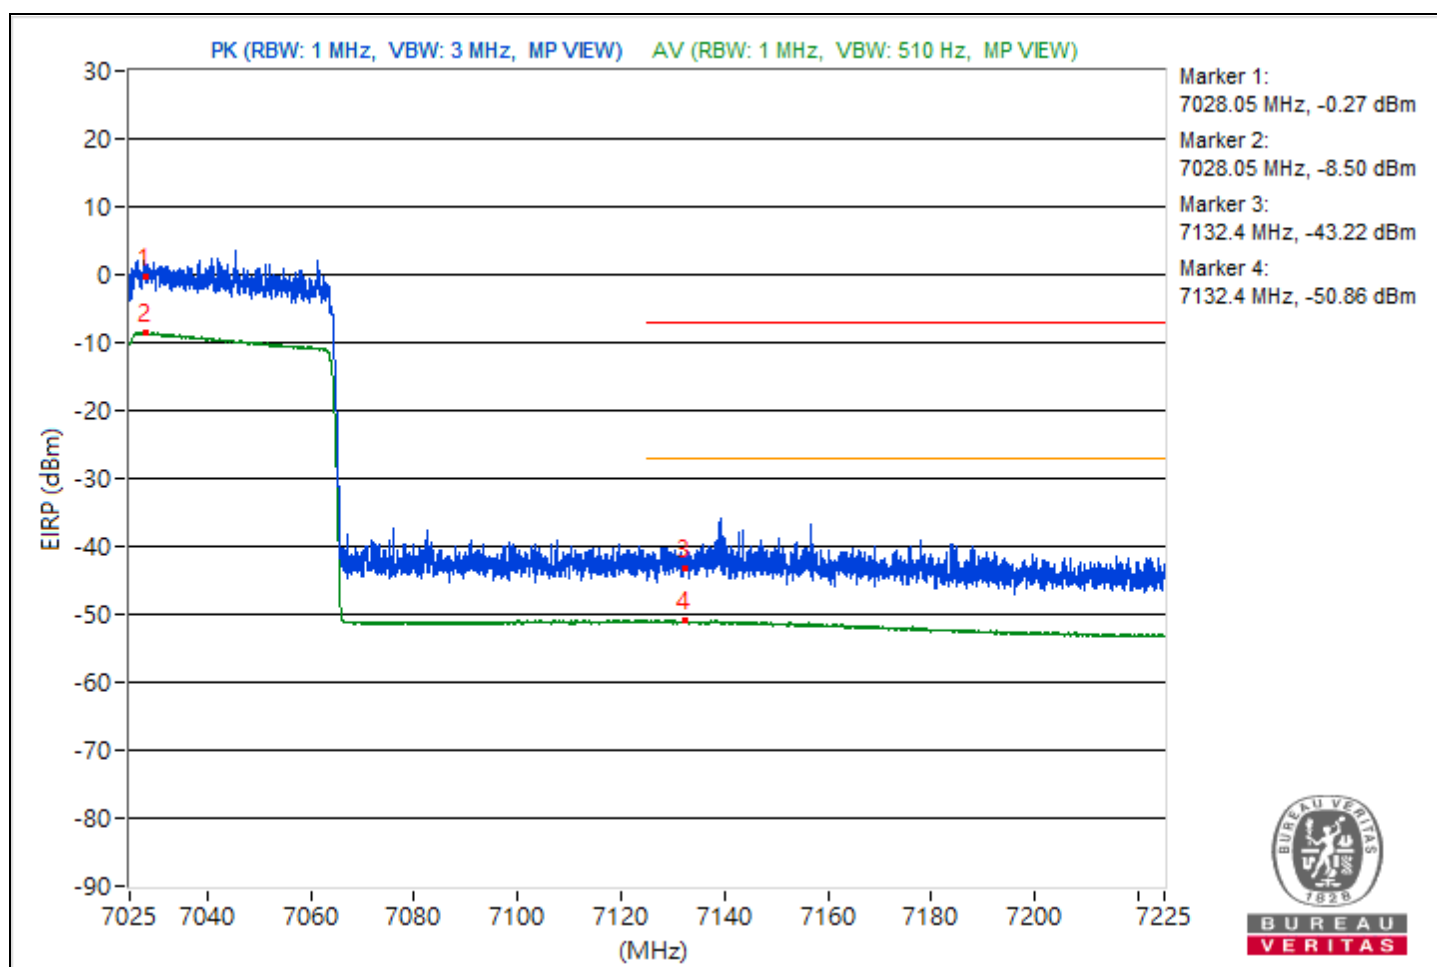


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.7	101.62 PK			1.6	4.76	6.36
2	*5946.7	89.91 AV			-10.11	4.76	-5.35
3	#5835.7	62.05 PK	88.26	-26.21	-37.97	4.76	-33.21
4	#5835.7	53.06 AV	68.26	-15.2	-46.96	4.76	-42.2

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

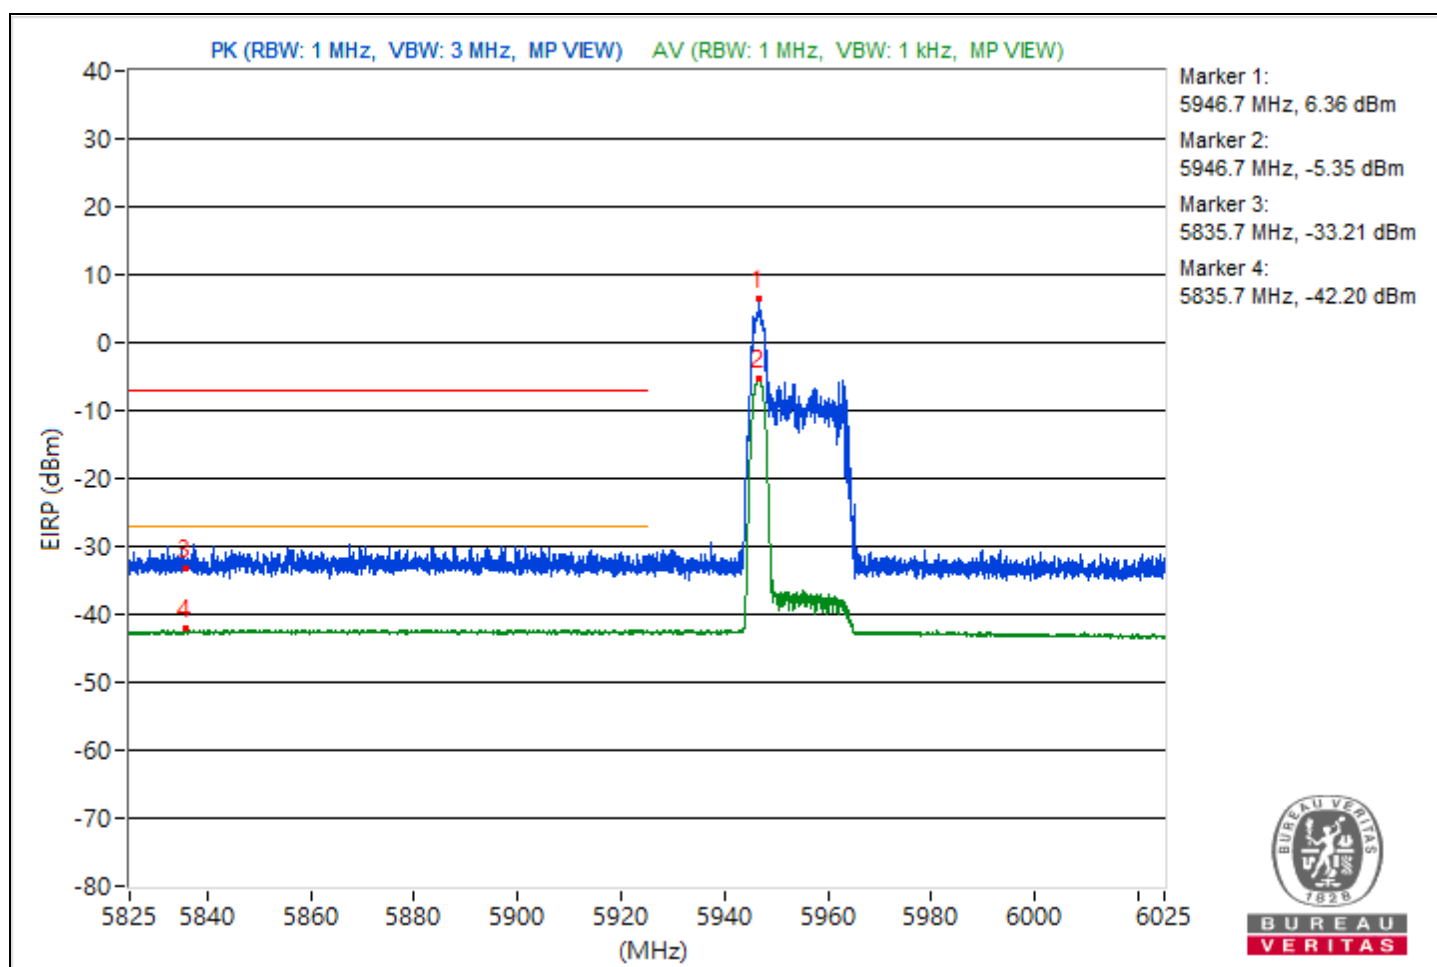

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Chun		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7123.55	94.56 PK			-4.79	4.09	-0.7
2	*7123.55	87.1 AV			-12.25	4.09	-8.16
3	#7125	88 PK	88.26	-0.26	-11.35	4.09	-7.26
4	!7125	80.41 AV	68.26	12.15	-18.94	4.09	-14.85

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.
 4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Integration method)

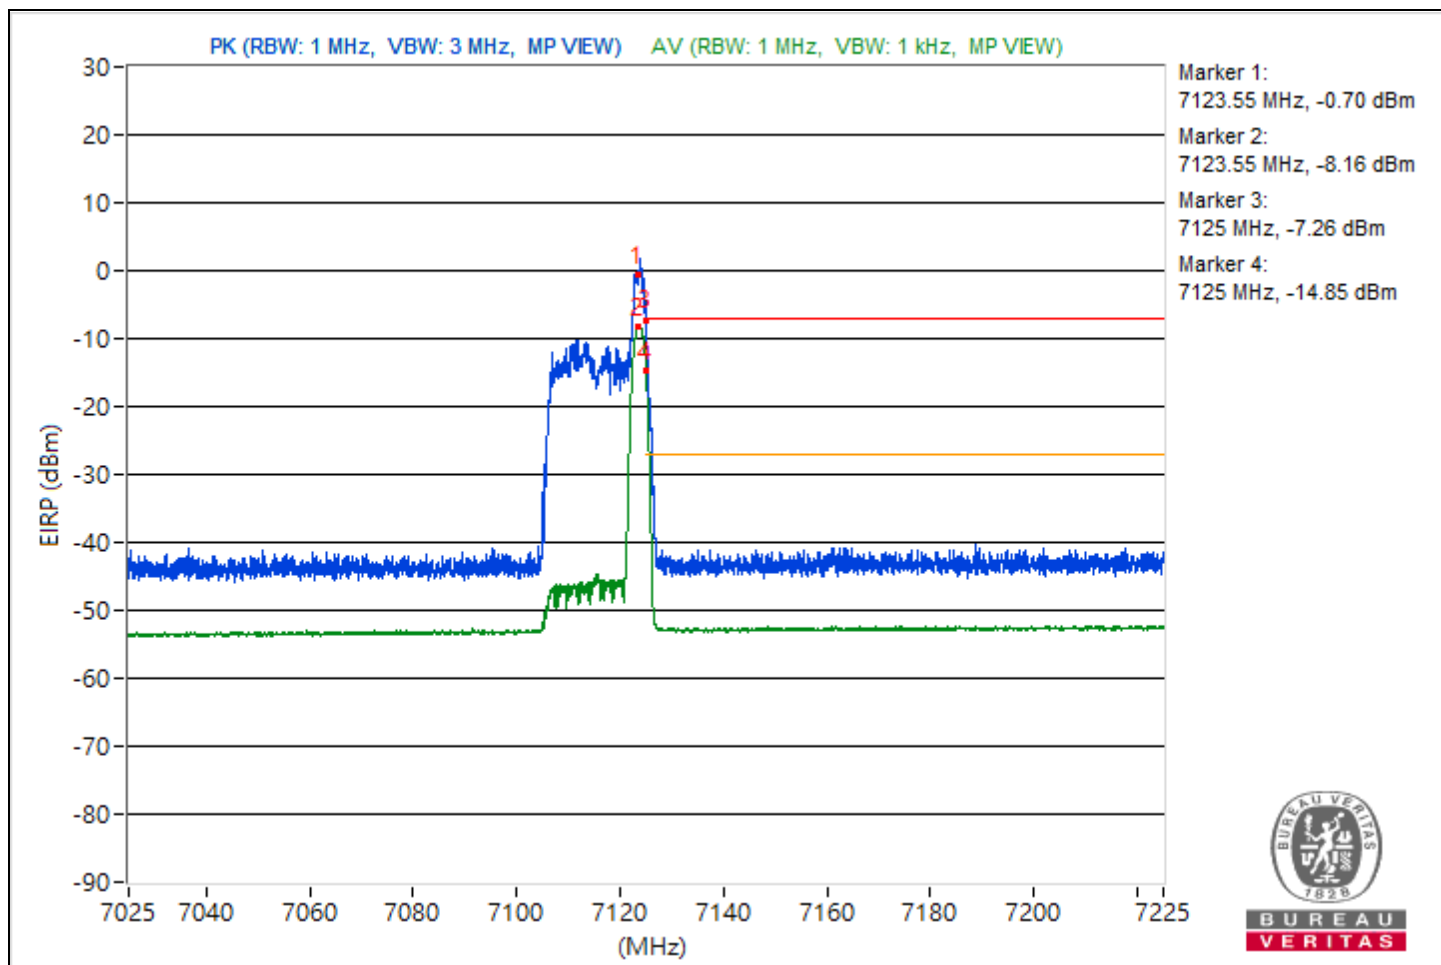


Integration method

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Katina Lu

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	56.36 AV	68.2	-11.84	-42.99	4.09	-38.9

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

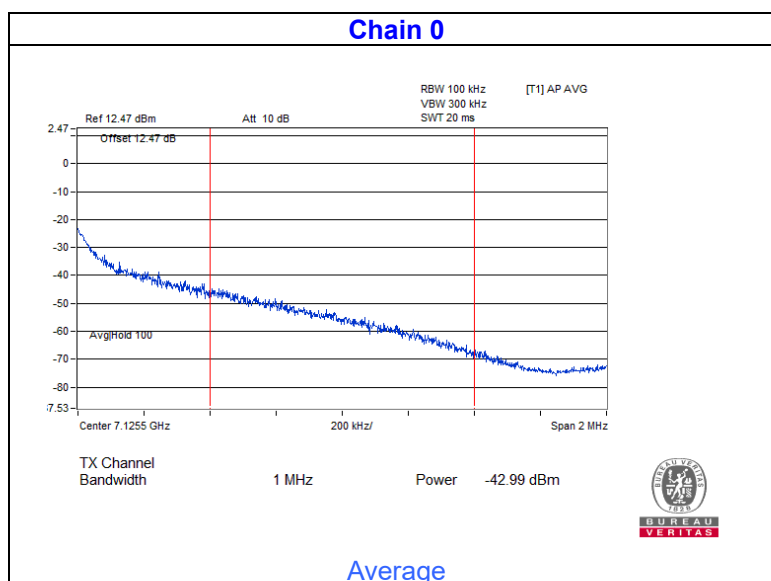


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5947.73	100.5 PK			0.48	4.76	5.24
2	*5947.73	90.15 AV			-9.87	4.76	-5.11
3	#5915.6	62.21 PK	88.26	-26.05	-37.81	4.76	-33.05
4	#5915.6	53.19 AV	68.26	-15.07	-46.83	4.76	-42.07

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

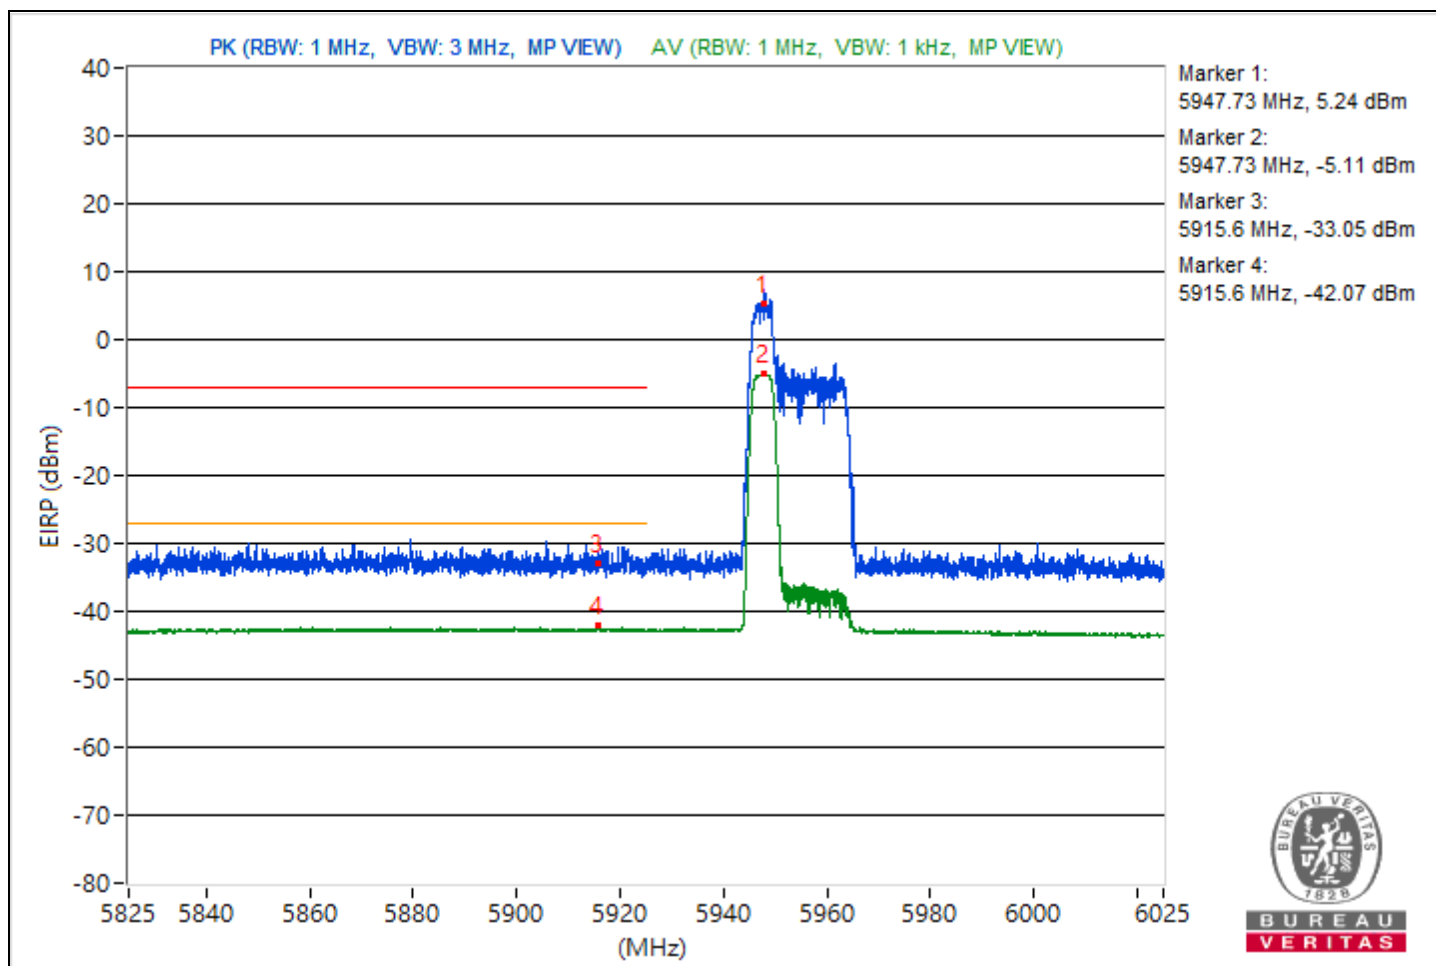

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Chun		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7121.68	94.43 PK			-4.92	4.09	-0.83
2	*7121.68	87.84 AV			-11.51	4.09	-7.42
3	#7125	87.74 PK	88.26	-0.52	-11.61	4.09	-7.52
4	!#7125	81.24 AV	68.26	12.98	-18.11	4.09	-14.02

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.
 4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Integration method)

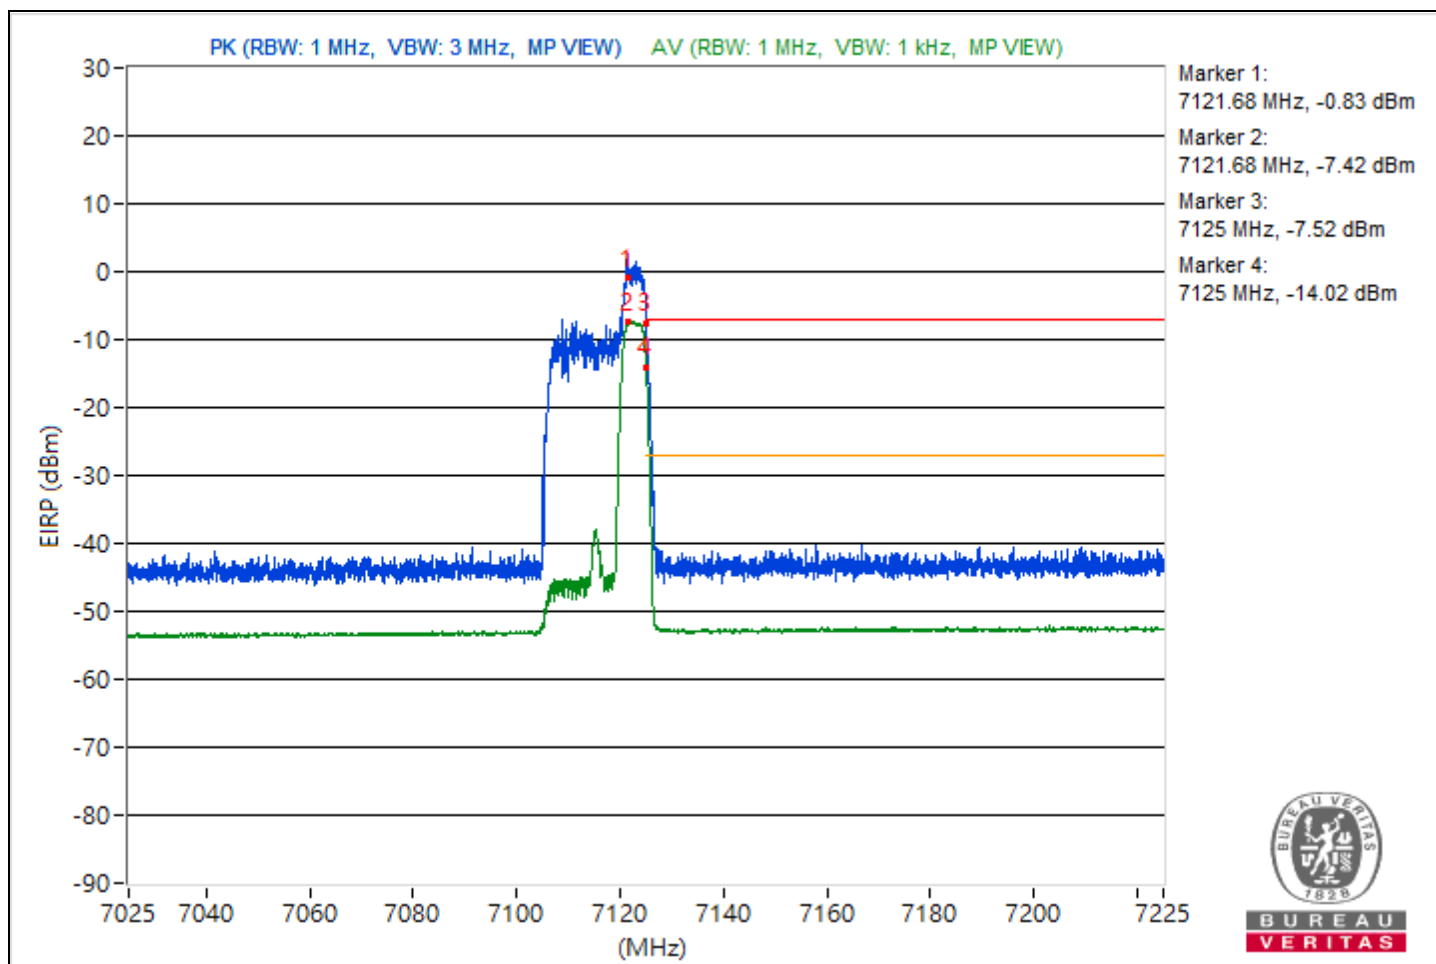


Integration method

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Katina Lu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	56.52 AV	68.2	-11.68	-42.83	4.09	-38.74

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

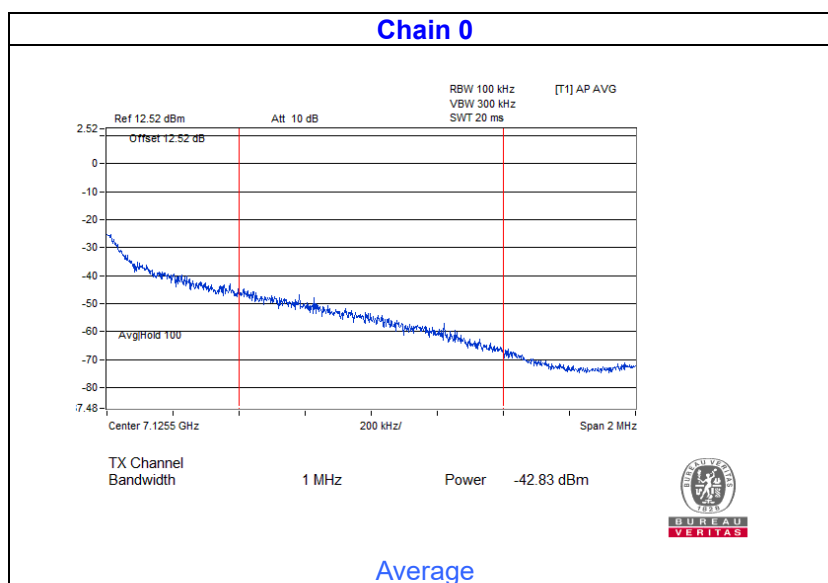


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5951.37	98.36 PK			-1.66	4.76	3.1
2	*5951.37	89.38 AV			-10.64	4.76	-5.88
3	#5902.05	62.83 PK	88.26	-25.43	-37.19	4.76	-32.43
4	#5902.05	53.26 AV	68.26	-15	-46.76	4.76	-42

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

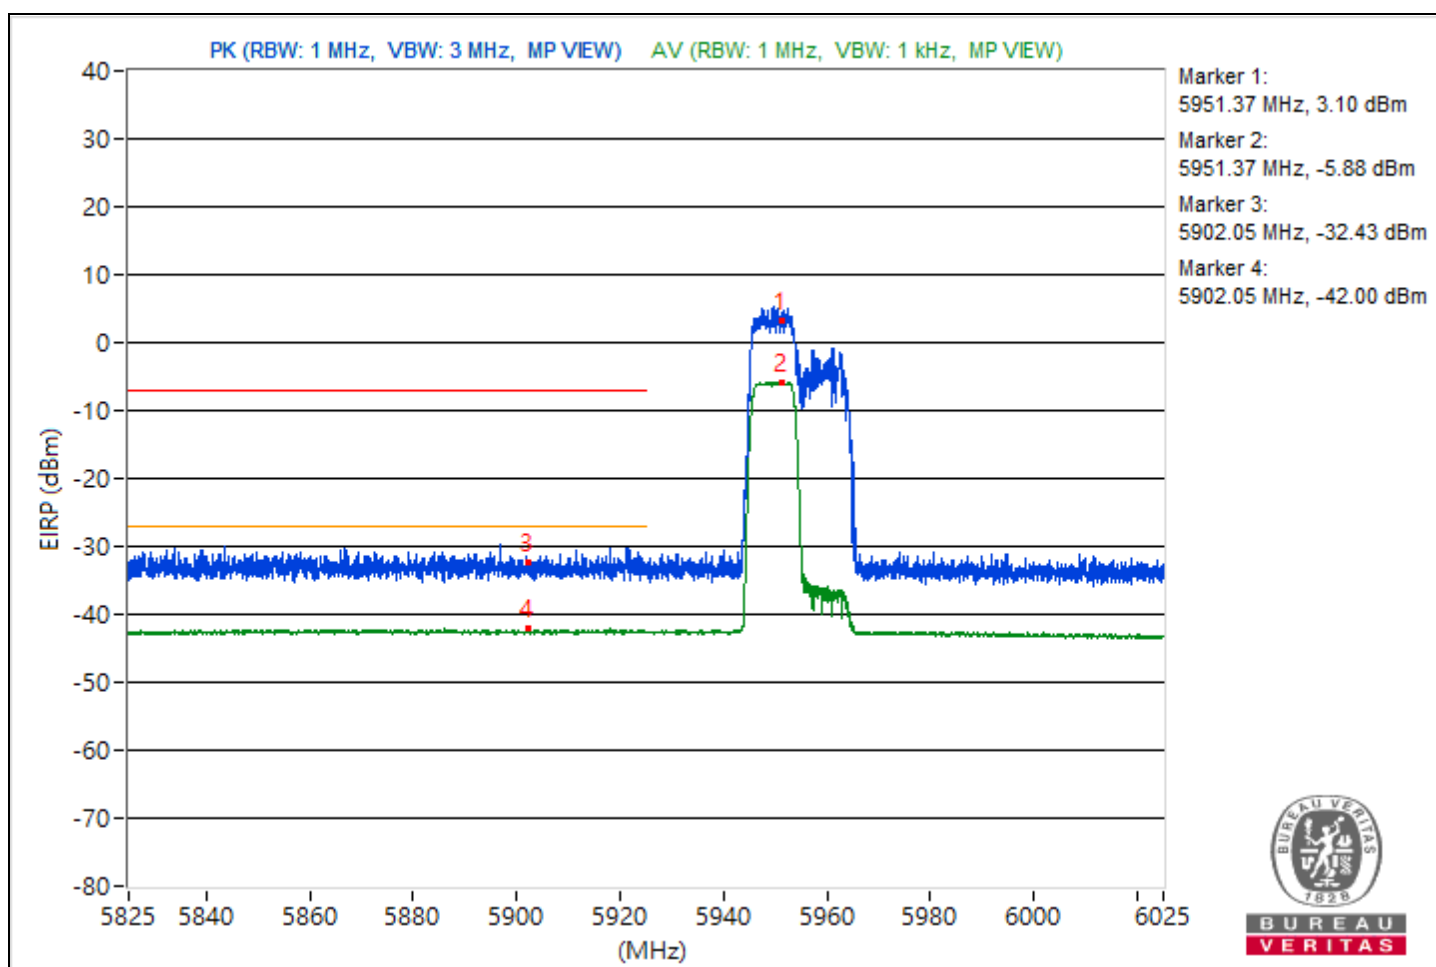

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Chun		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7123.12	94.09 PK			-5.26	4.09	-1.17
2	*7123.12	86.95 AV			-12.4	4.09	-8.31
3	#7125	87.73 PK	88.26	-0.53	-11.62	4.09	-7.53
4	!#7125	81.16 AV	68.26	12.9	-18.19	4.09	-14.1

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.
 4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Integration method)

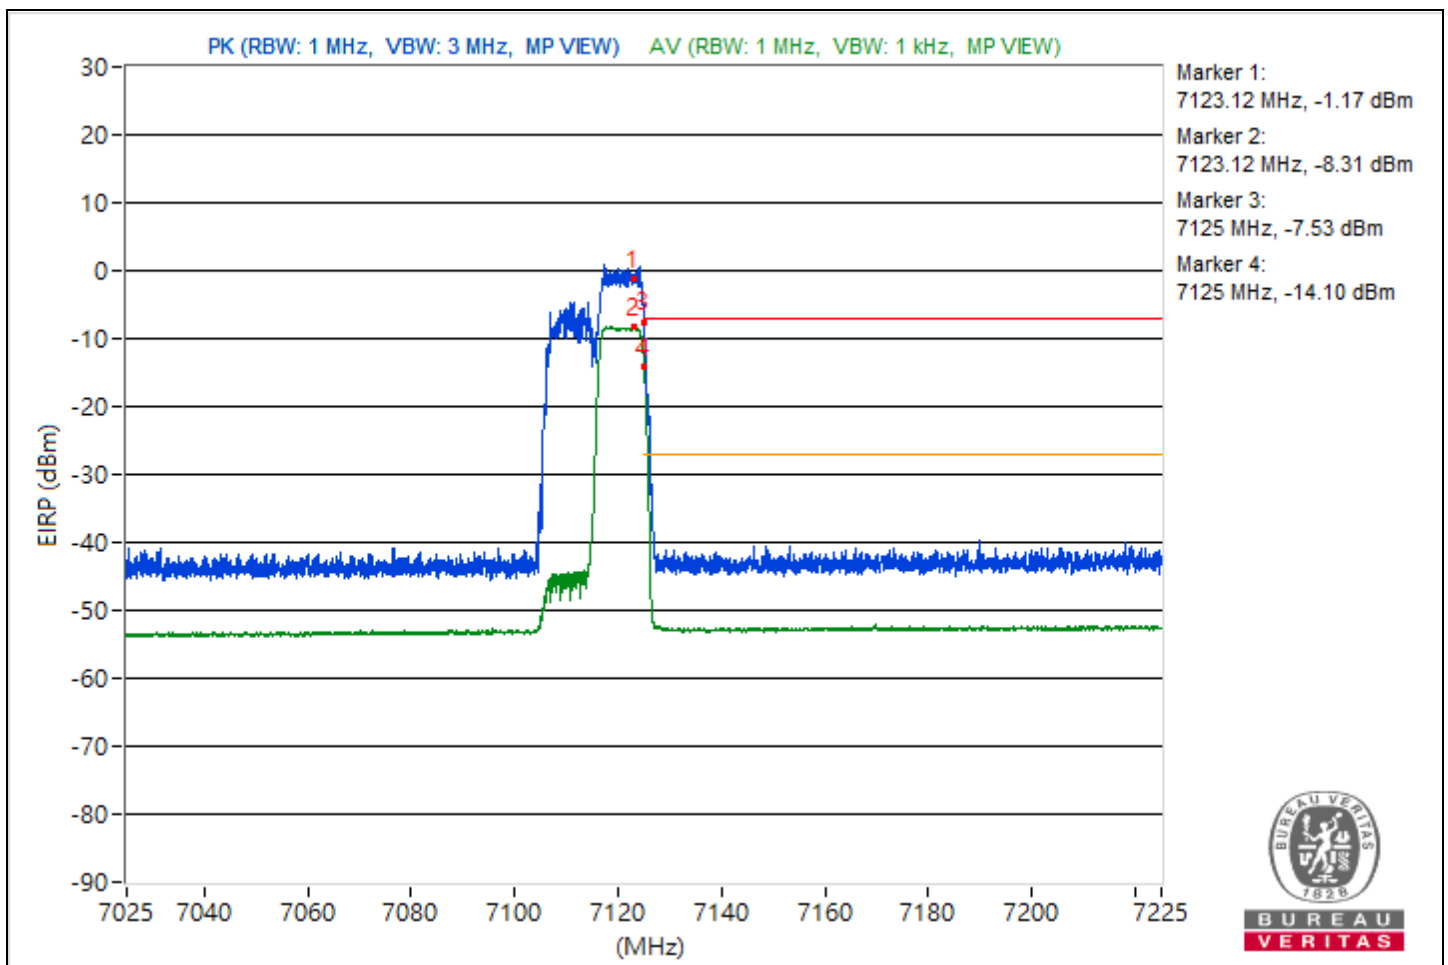


Integration method

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Katina Lu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	57.38 AV	68.2	-10.82	-41.97	4.09	-37.88

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

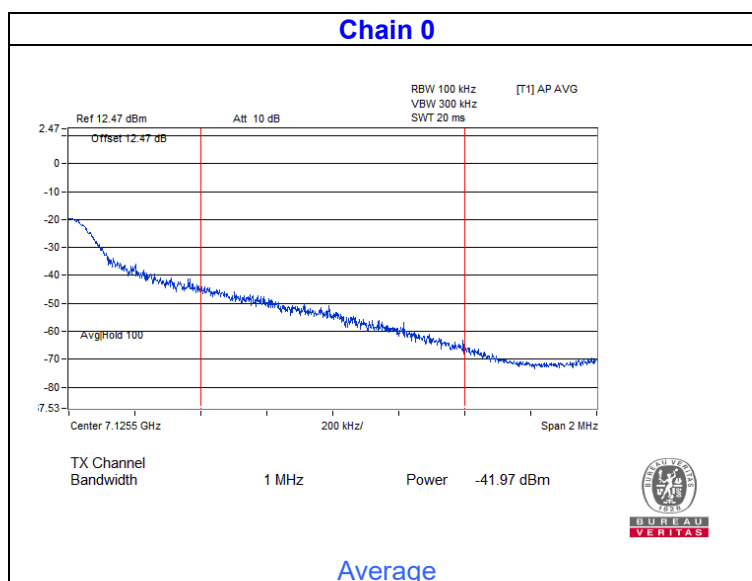


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5952.02	98.16 PK			-1.86	4.76	2.9
2	*5952.02	89.38 AV			-10.64	4.76	-5.88
3	#5859.93	65.07 PK	88.26	-23.19	-34.95	4.76	-30.19
4	#5859.93	53.06 AV	68.26	-15.2	-46.96	4.76	-42.2

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

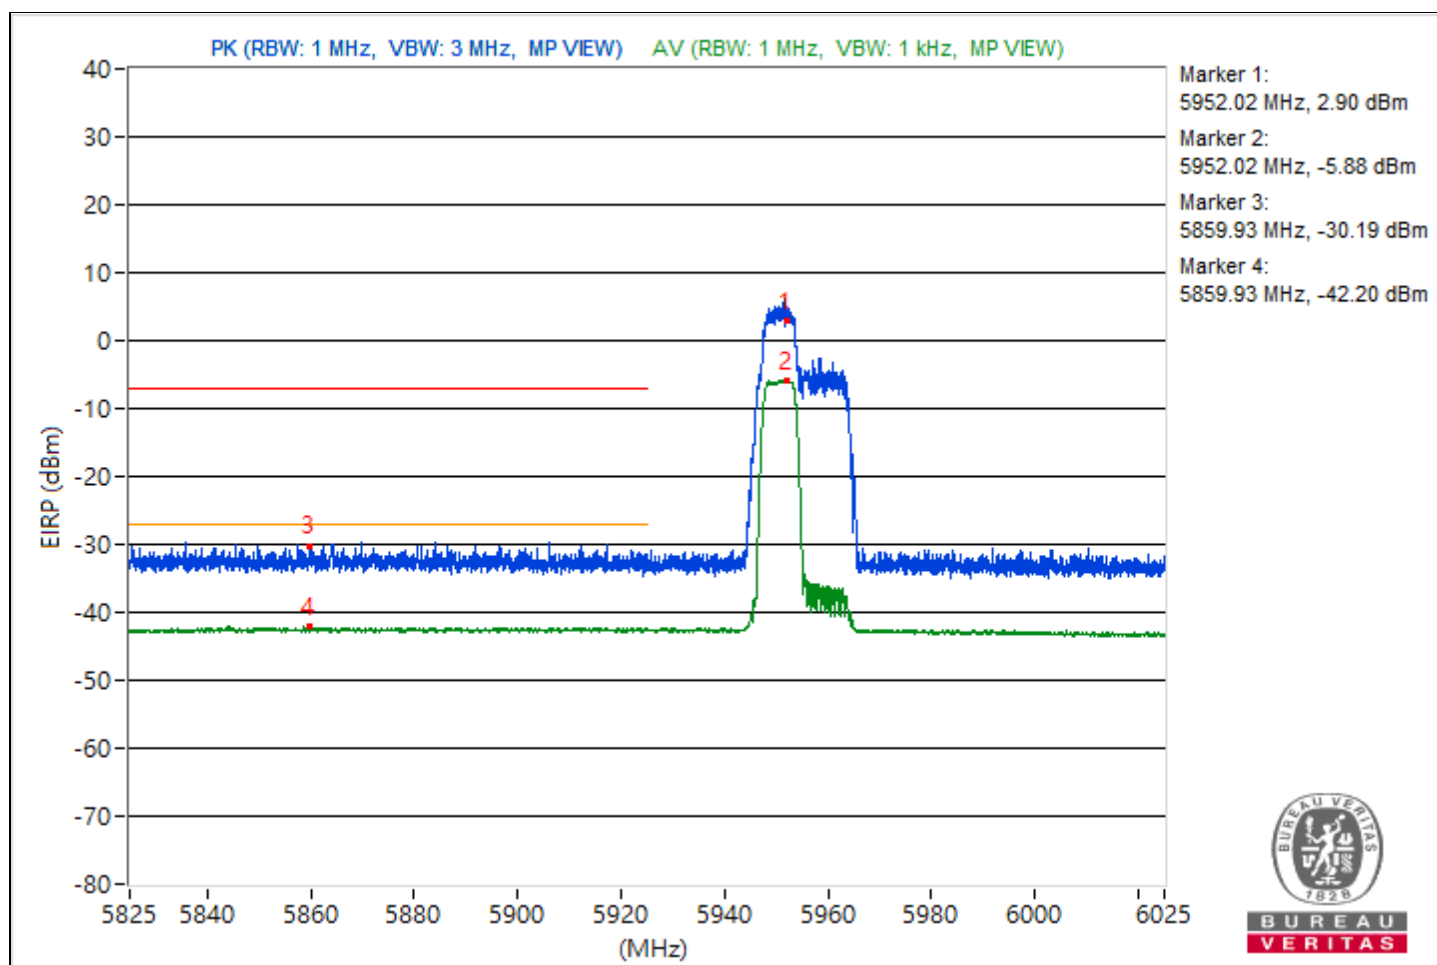


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7118.75	98.95 PK			-0.4	4.09	3.69
2	*7118.75	89.75 AV			-9.6	4.09	-5.51
3	#7125	73.64 PK	88.26	-14.62	-25.71	4.09	-21.62
4	#7125	44.58 AV	68.26	-23.68	-54.77	4.09	-50.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

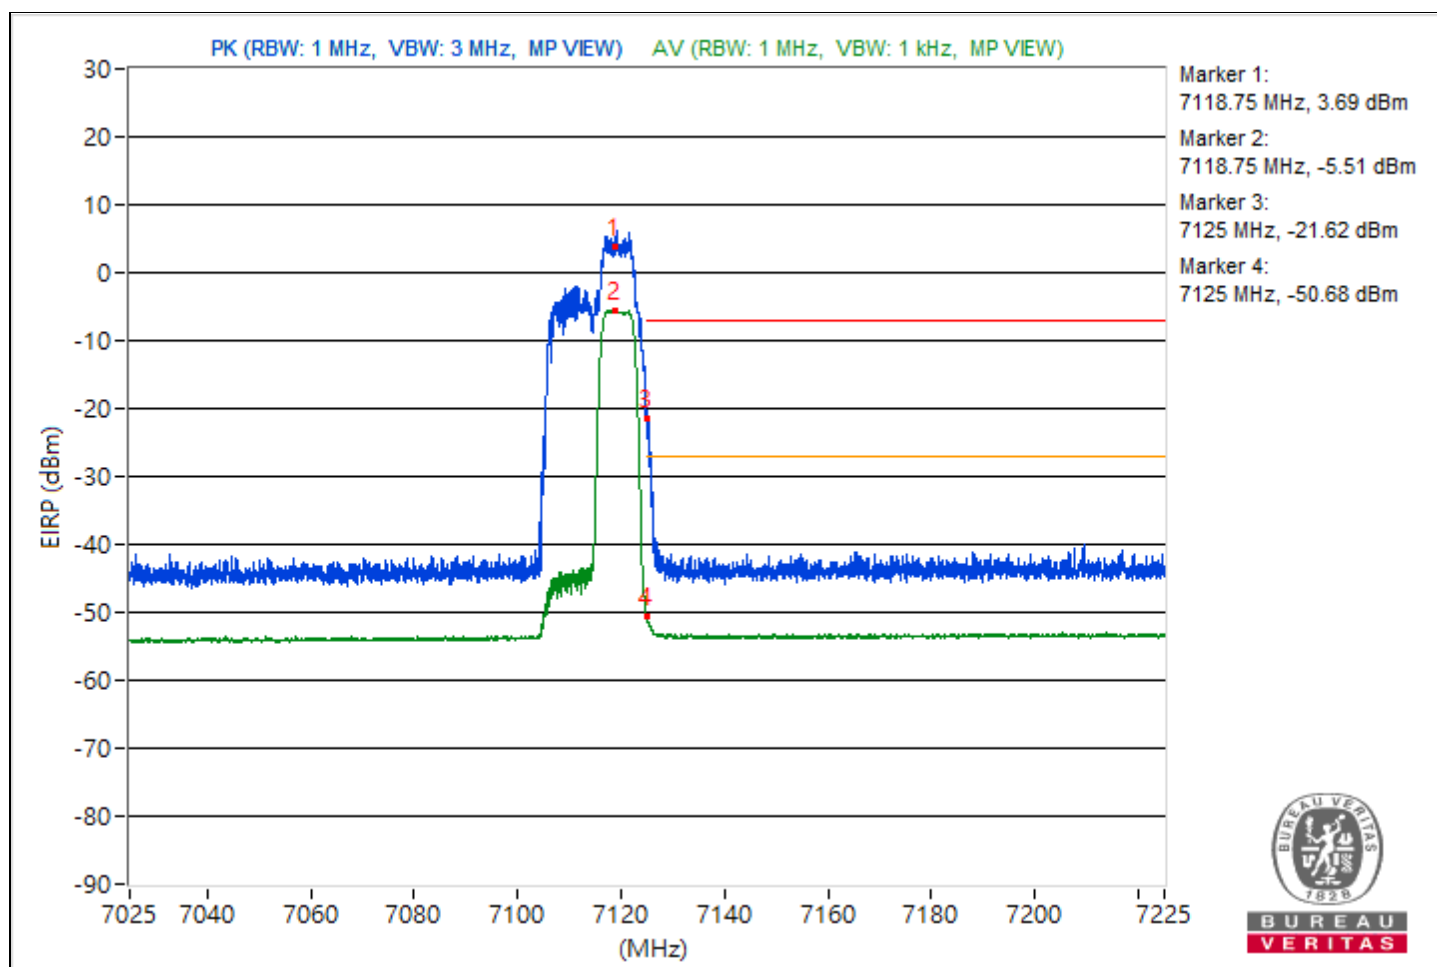


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.87	98.95 PK			-1.07	4.76	3.69
2	*5953.87	89.51 AV			-10.51	4.76	-5.75
3	#5919.15	61.76 PK	88.26	-26.5	-38.26	4.76	-33.5
4	#5919.15	53.12 AV	68.26	-15.14	-46.9	4.76	-42.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

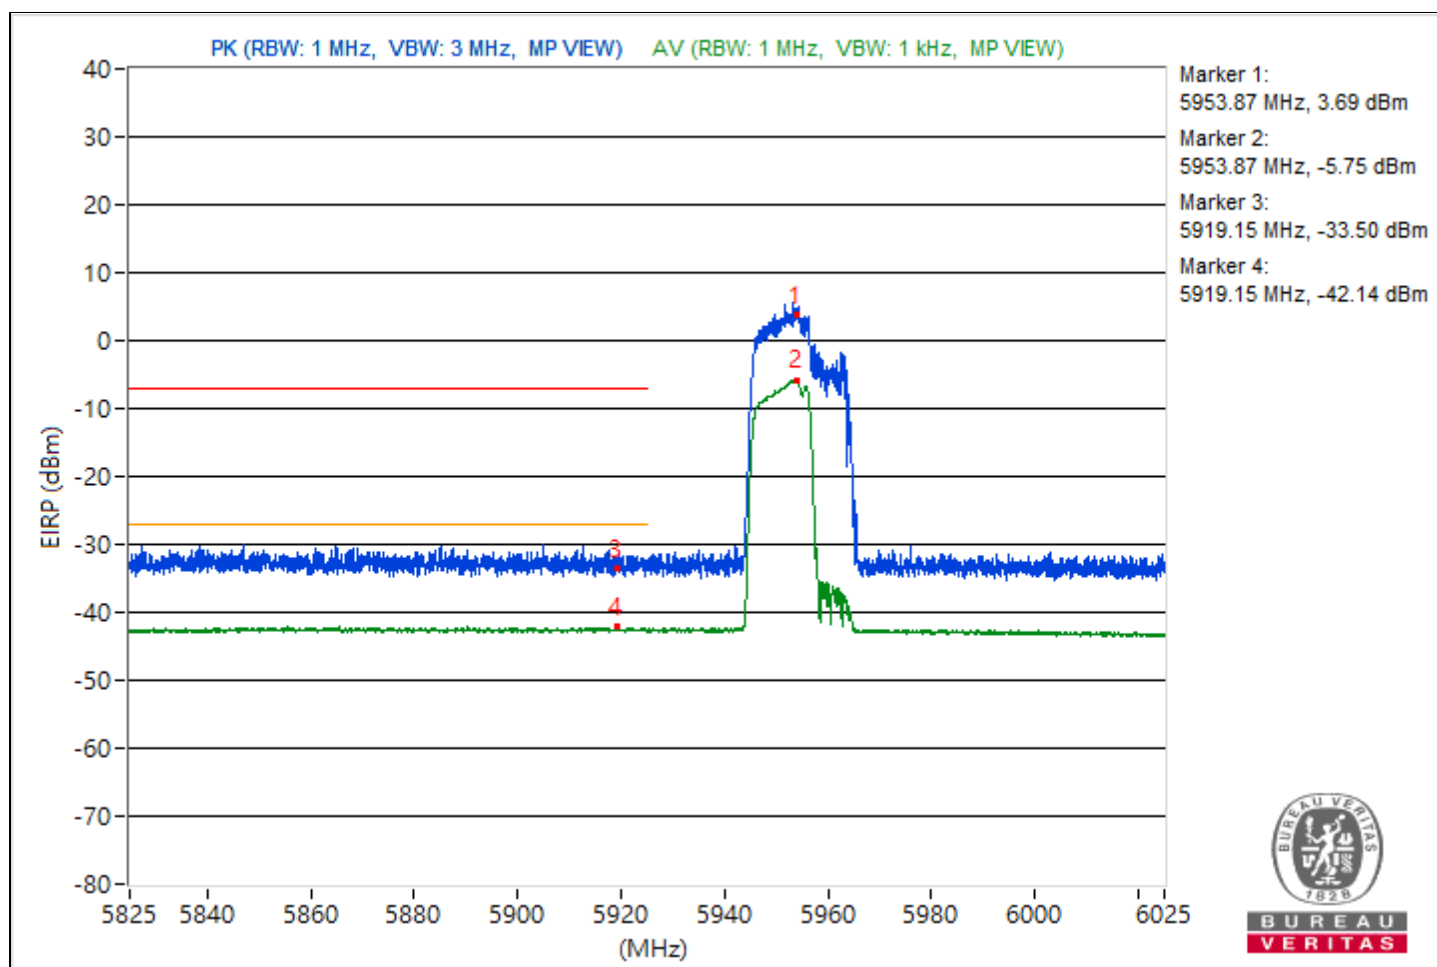


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Chun		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7116.32	97.42 PK			-1.93	4.09	2.16
2	*7116.32	90.63 AV			-8.72	4.09	-4.63
3	#7125	87.76 PK	88.26	-0.5	-11.59	4.09	-7.5
4	!#7125	80.61 AV	68.26	12.35	-18.74	4.09	-14.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Integration method)

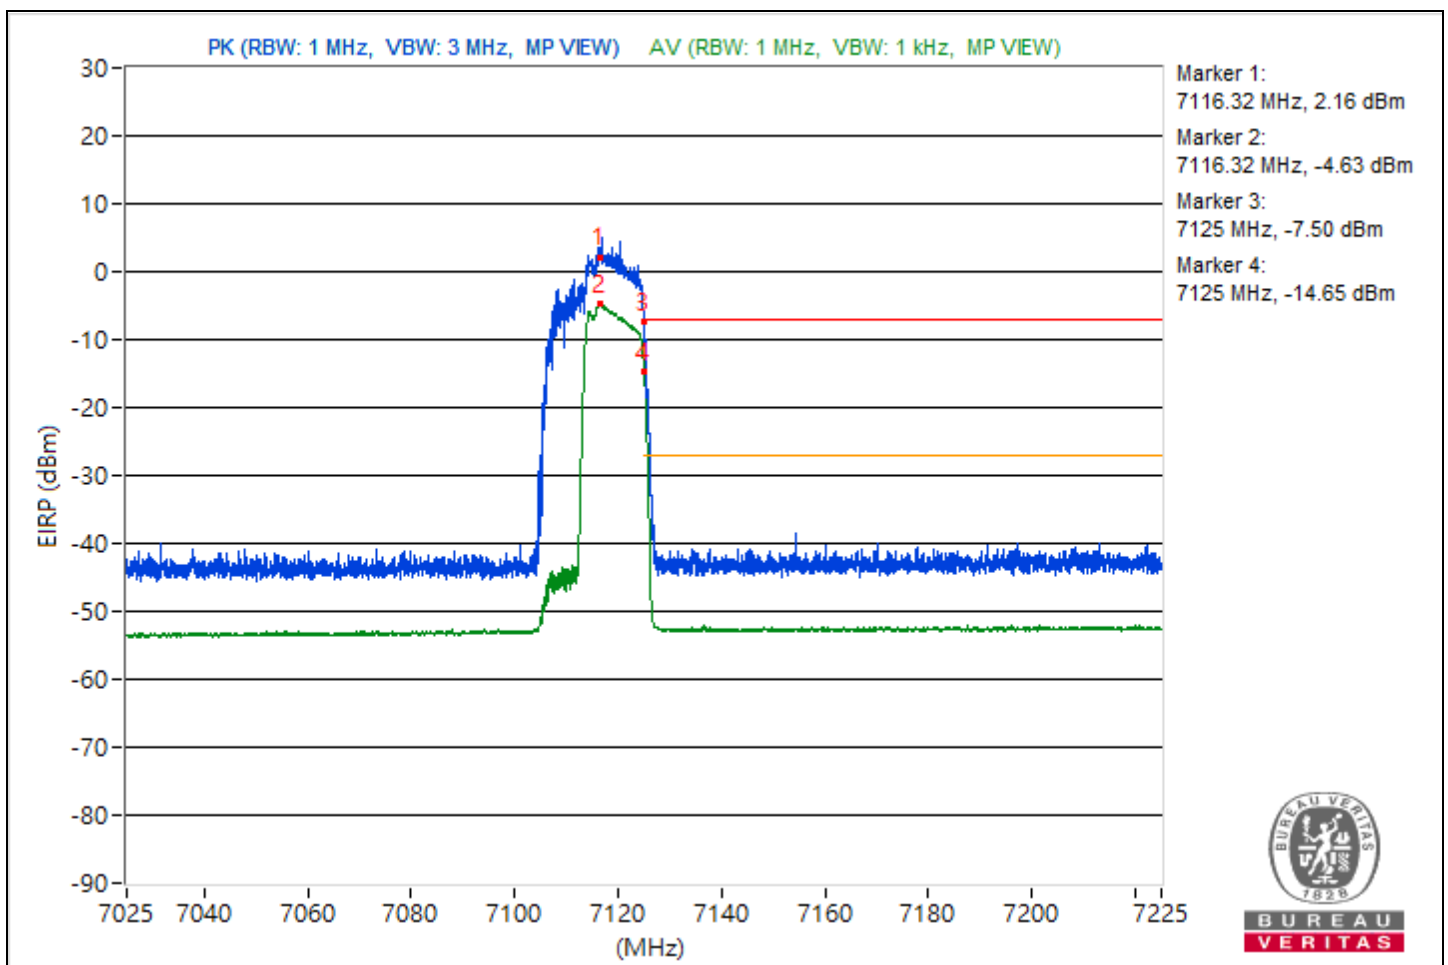


Integration method

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Katina Lu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	53.75 AV	68.2	-14.45	-45.6	4.09	-41.51

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

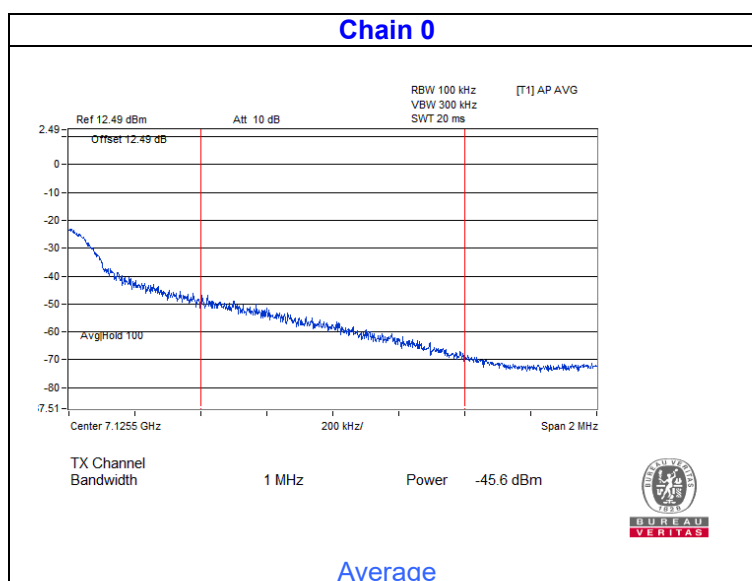


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5987.87	99.83 PK			-0.19	4.76	4.57
2	*5987.87	89.37 AV			-10.65	4.76	-5.89
3	#5885.55	61.94 PK	88.26	-26.32	-38.08	4.76	-33.32
4	#5885.55	53.15 AV	68.26	-15.11	-46.87	4.76	-42.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

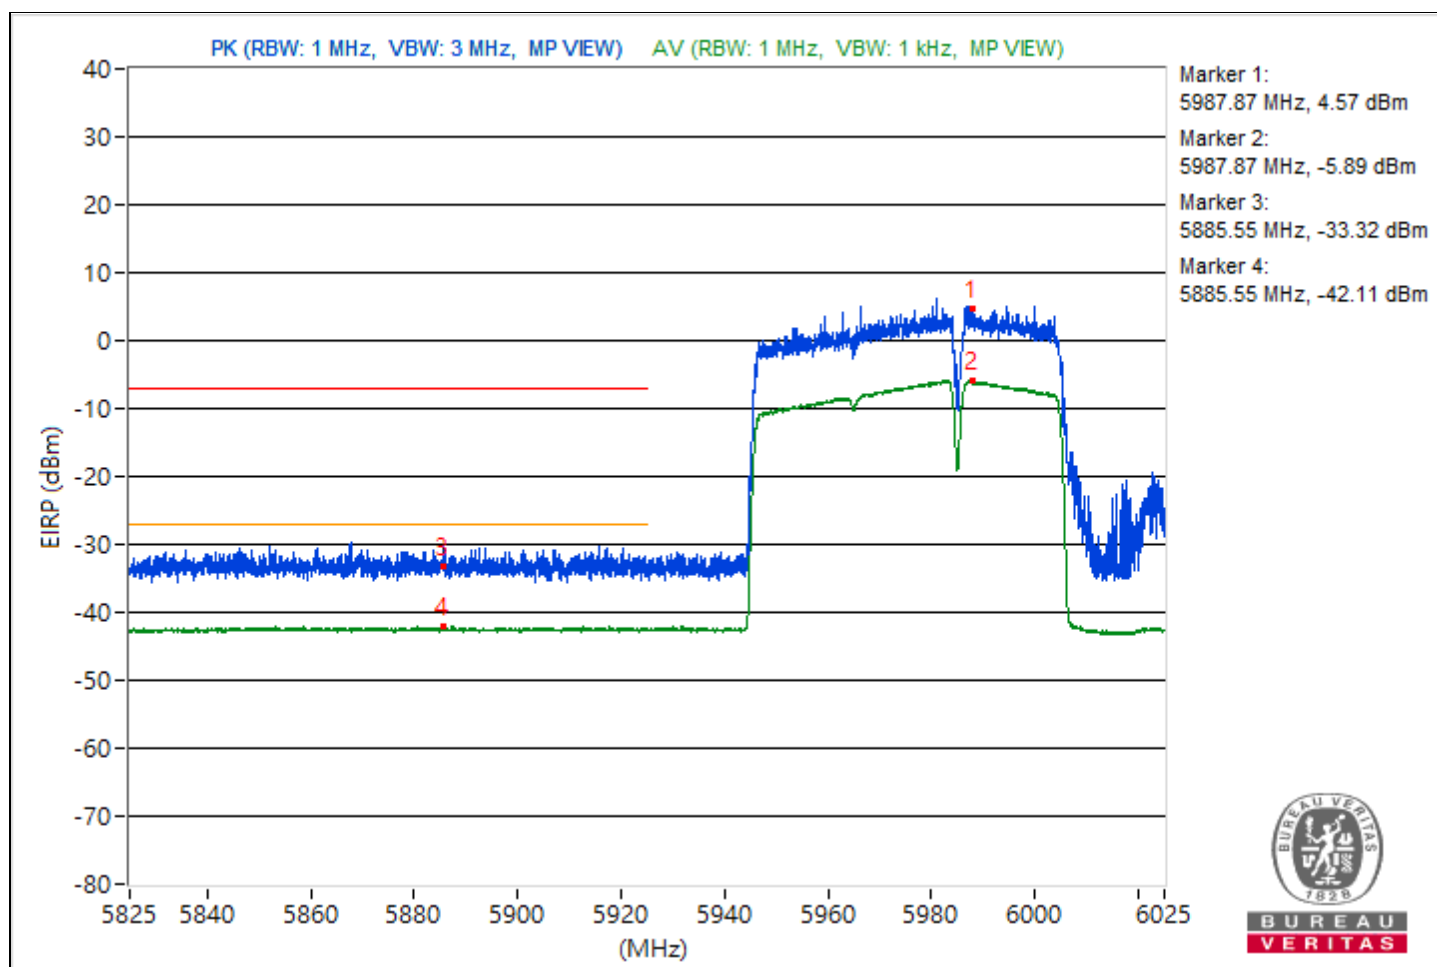


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7029.37	101.85 PK			2.5	4.09	6.59
2	*7029.37	89.9 AV			-9.45	4.09	-5.36
3	#7197.93	51.42 PK	88.26	-36.84	-47.93	4.09	-43.84
4	#7197.93	42.64 AV	68.26	-25.62	-56.71	4.09	-52.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

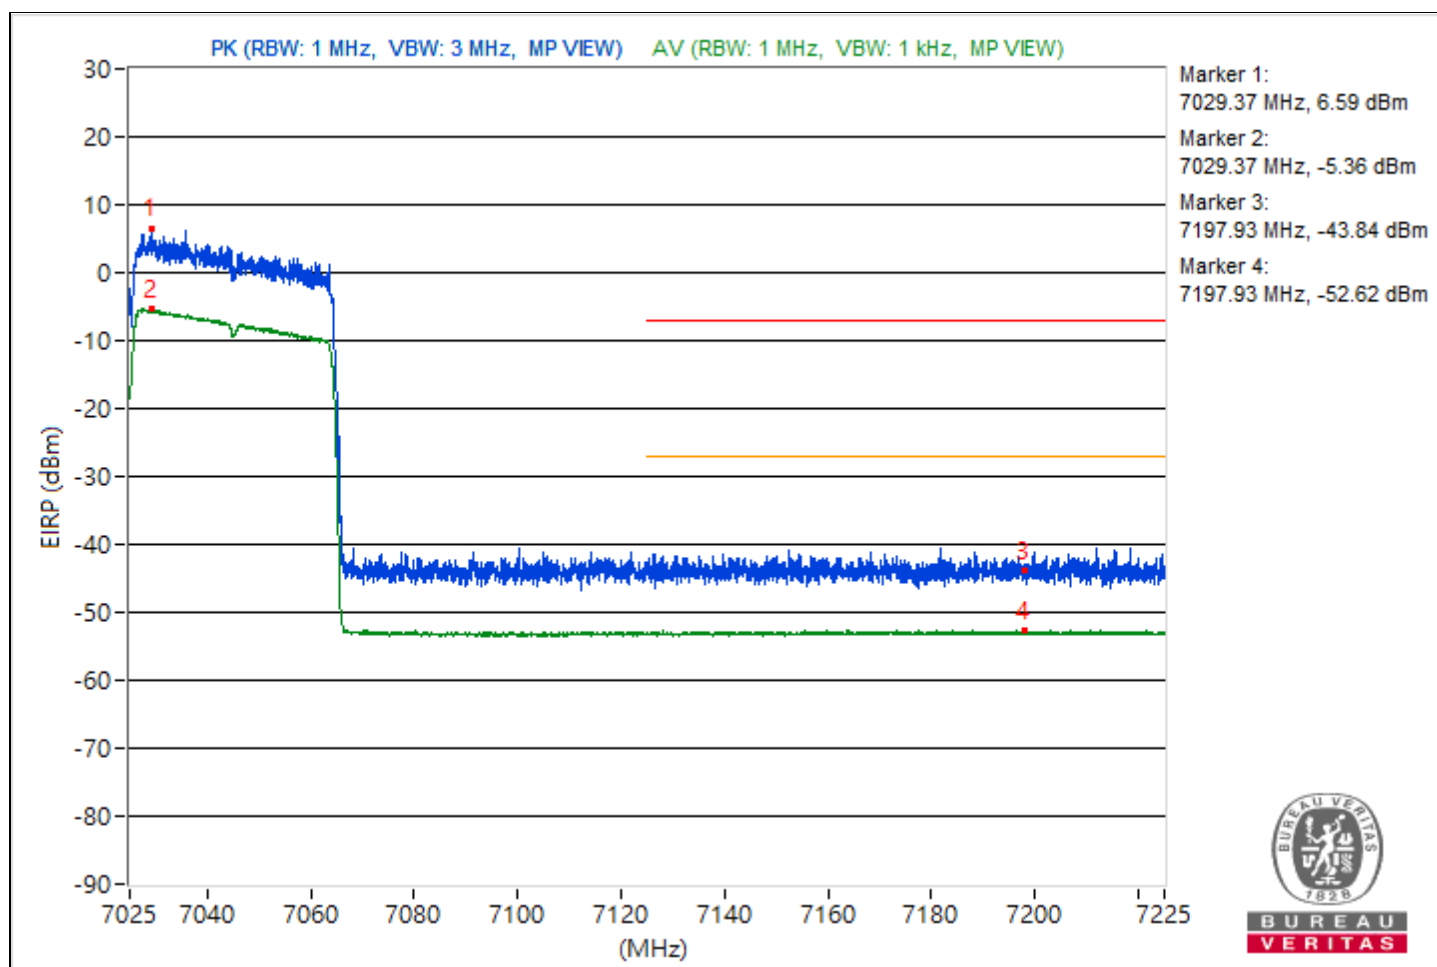


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6021.57	96.06 PK			-3.96	4.76	0.8
2	*6021.57	88.31 AV			-11.71	4.76	-6.95
3	#5875.25	60.42 PK	88.26	-27.84	-39.6	4.76	-34.84
4	#5875.25	53.12 AV	68.26	-15.14	-46.9	4.76	-42.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

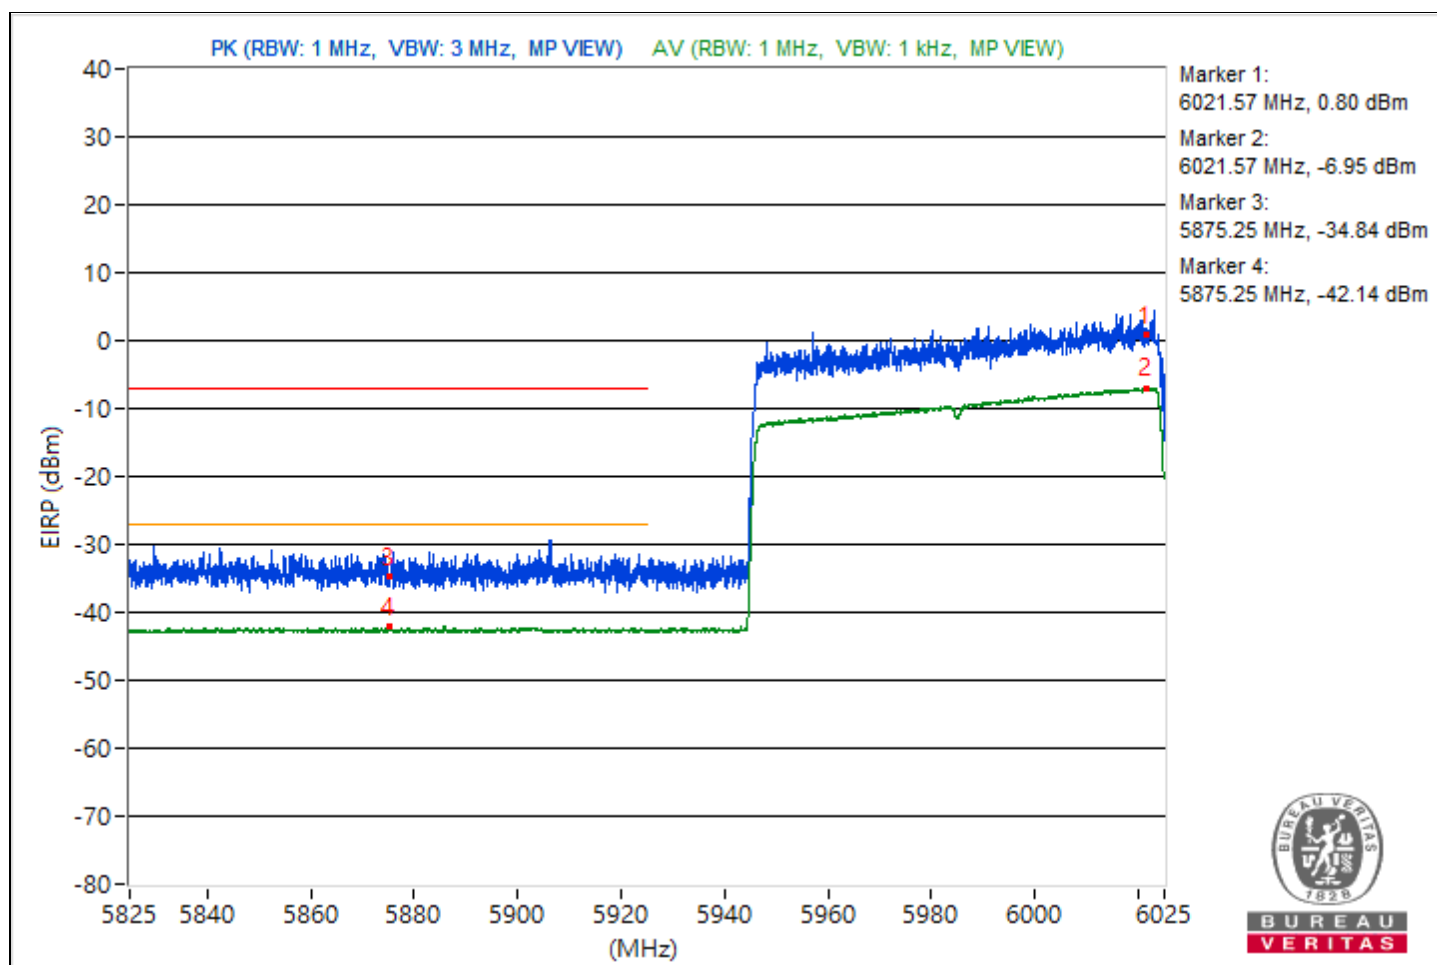


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7027.9	93.86 PK			-5.49	4.09	-1.4
2	*7027.9	85.58 AV			-13.77	4.09	-9.68
3	#7141.62	50.09 PK	88.26	-38.17	-49.26	4.09	-45.17
4	#7141.62	42.7 AV	68.26	-25.56	-56.65	4.09	-52.56

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

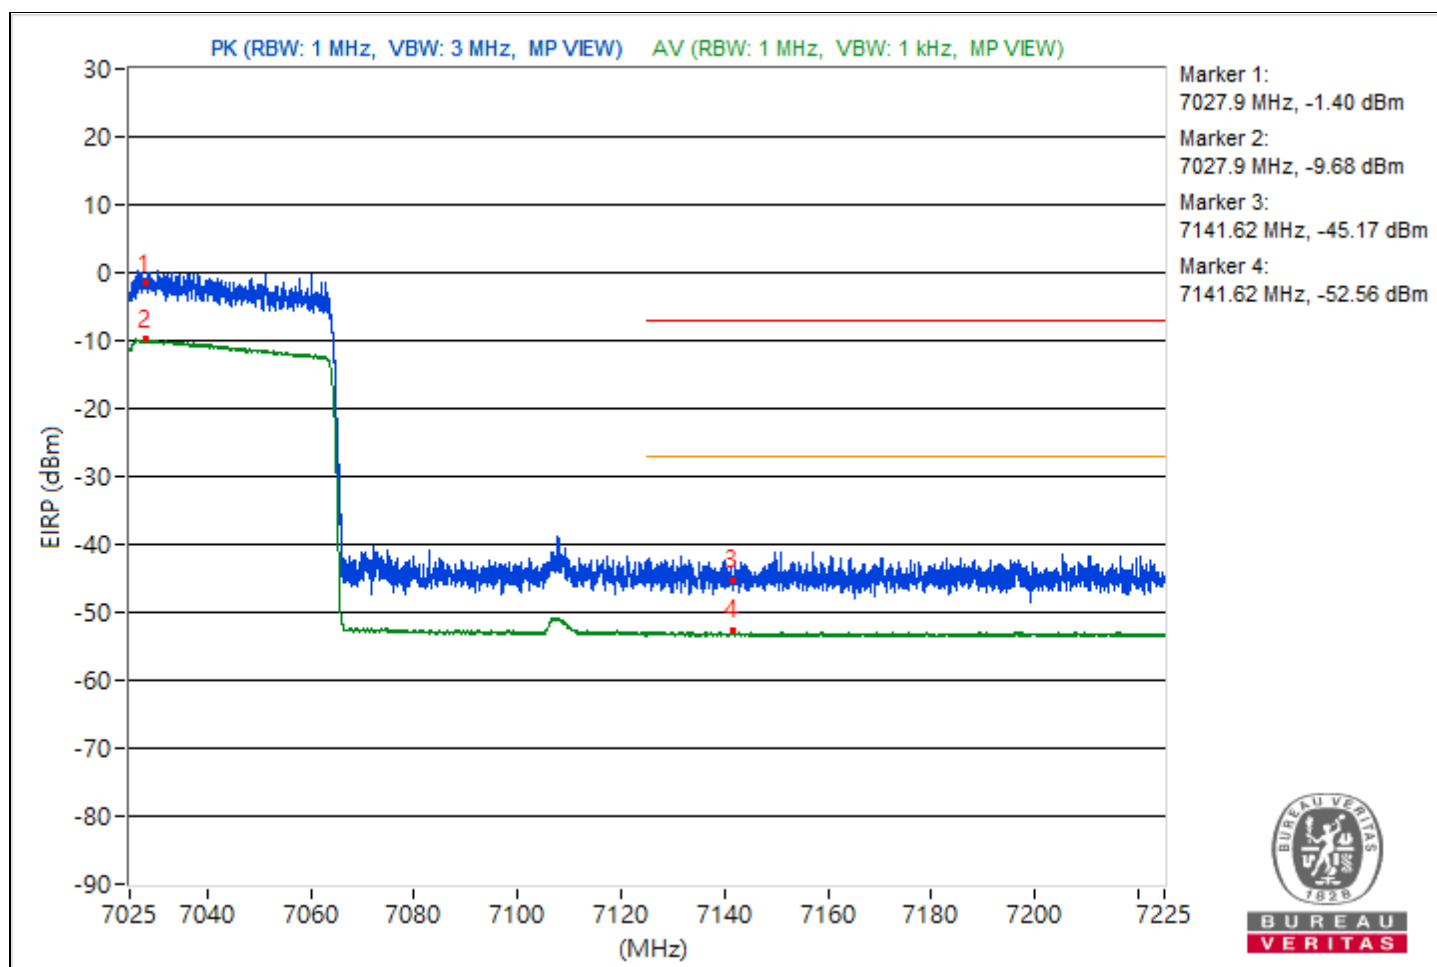


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.82	95.79 PK			-4.23	4.76	0.53
2	*6022.82	87.83 AV			-12.19	4.76	-7.43
3	#5853.43	59.58 PK	88.26	-28.68	-40.44	4.76	-35.68
4	#5853.43	53 AV	68.26	-15.26	-47.02	4.76	-42.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

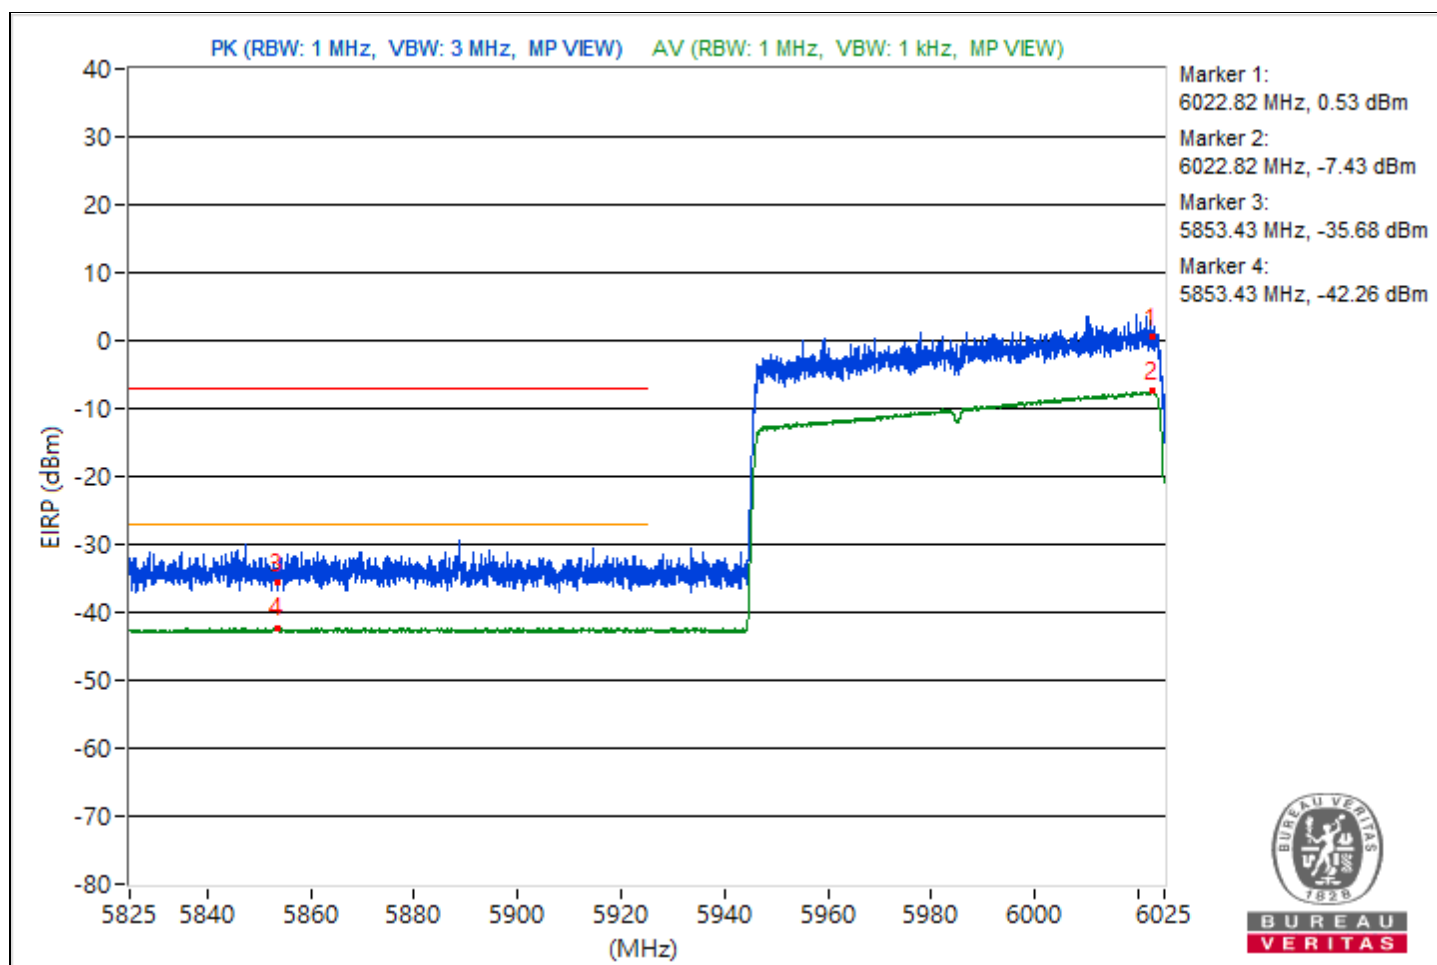


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7027.9	93.09 PK			-6.26	4.09	-2.17
2	*7027.9	84.98 AV			-14.37	4.09	-10.28
3	#7127.35	50.34 PK	88.26	-37.92	-49.01	4.09	-44.92
4	#7127.35	42.54 AV	68.26	-25.72	-56.81	4.09	-52.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

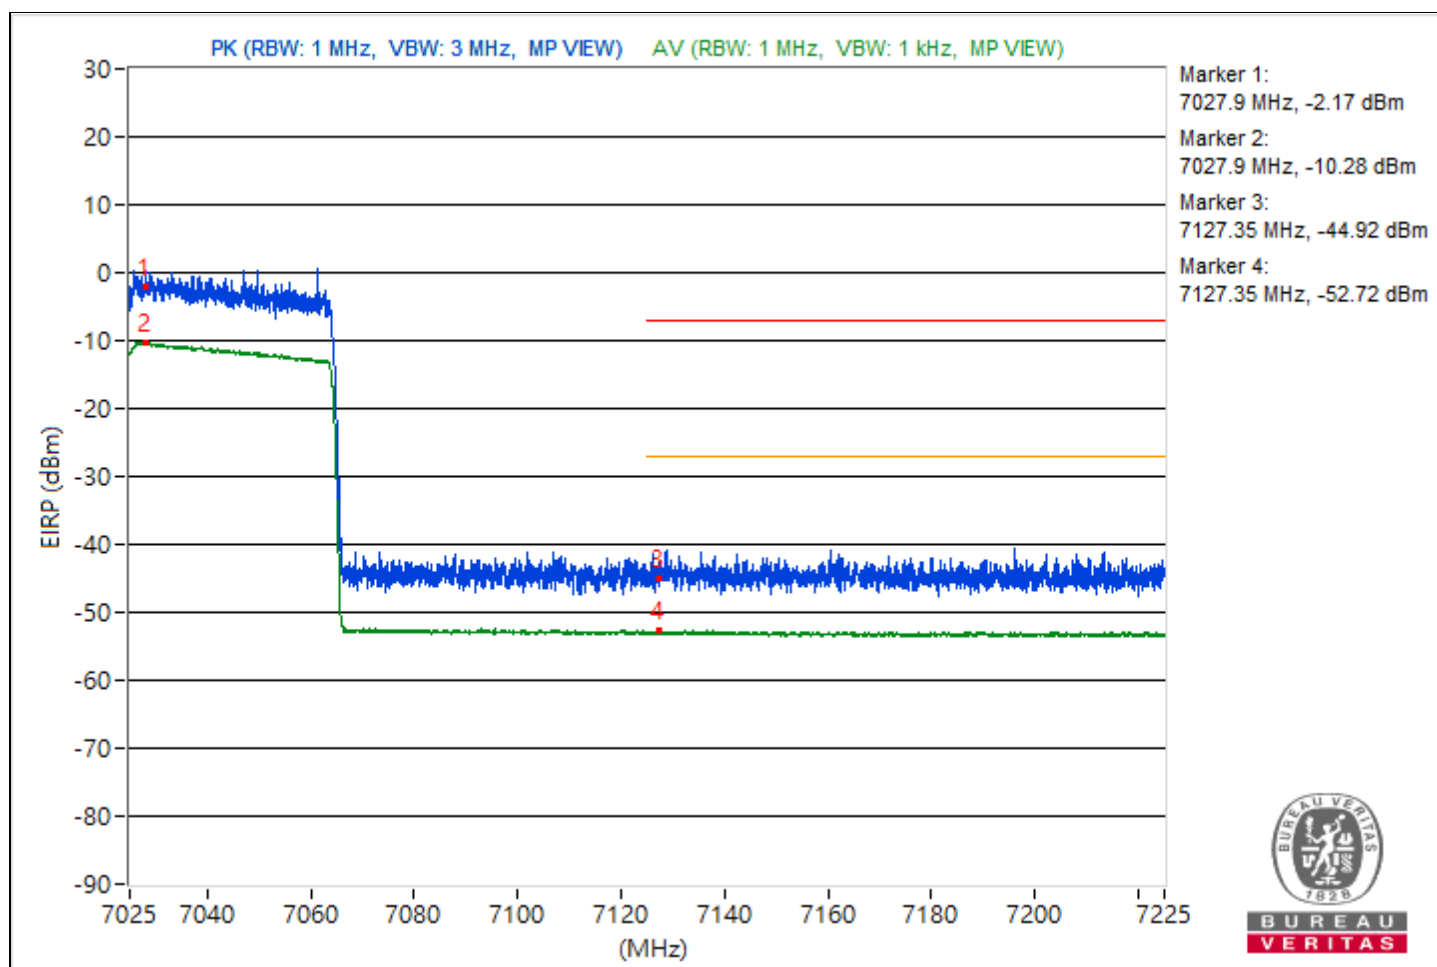


2TX


Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3758.31	47.69 PK	74	-26.31	-58.35	-58.69	7.93	-47.57
2	3758.31	40.41 AV	54	-13.59	-65.48	-66.12	7.93	-54.85
3	14475.73	47.65 PK	74	-26.35	-59.47	-57.79	7.93	-47.61
4	14475.73	39.46 AV	54	-14.54	-66.45	-67.06	7.93	-55.8
5	21389.1	48.27 PK	74	-25.73	-59.53	-56.76	7.93	-46.99
6	21389.1	41.17 AV	54	-12.83	-65.24	-64.83	7.93	-54.09
7	22216.8	49.93 PK	74	-24.07	-56.75	-55.84	7.93	-45.33
8	22216.8	42.37 AV	54	-11.63	-63.44	-64.26	7.93	-52.89
9	38843.64	42.23 PK	74	-31.77	-65.05	-63.1	7.93	-53.03
10	38843.64	36.09 AV	54	-17.91	-70	-70.24	7.93	-59.17

Note: Margin value = Emission Level - Limit value

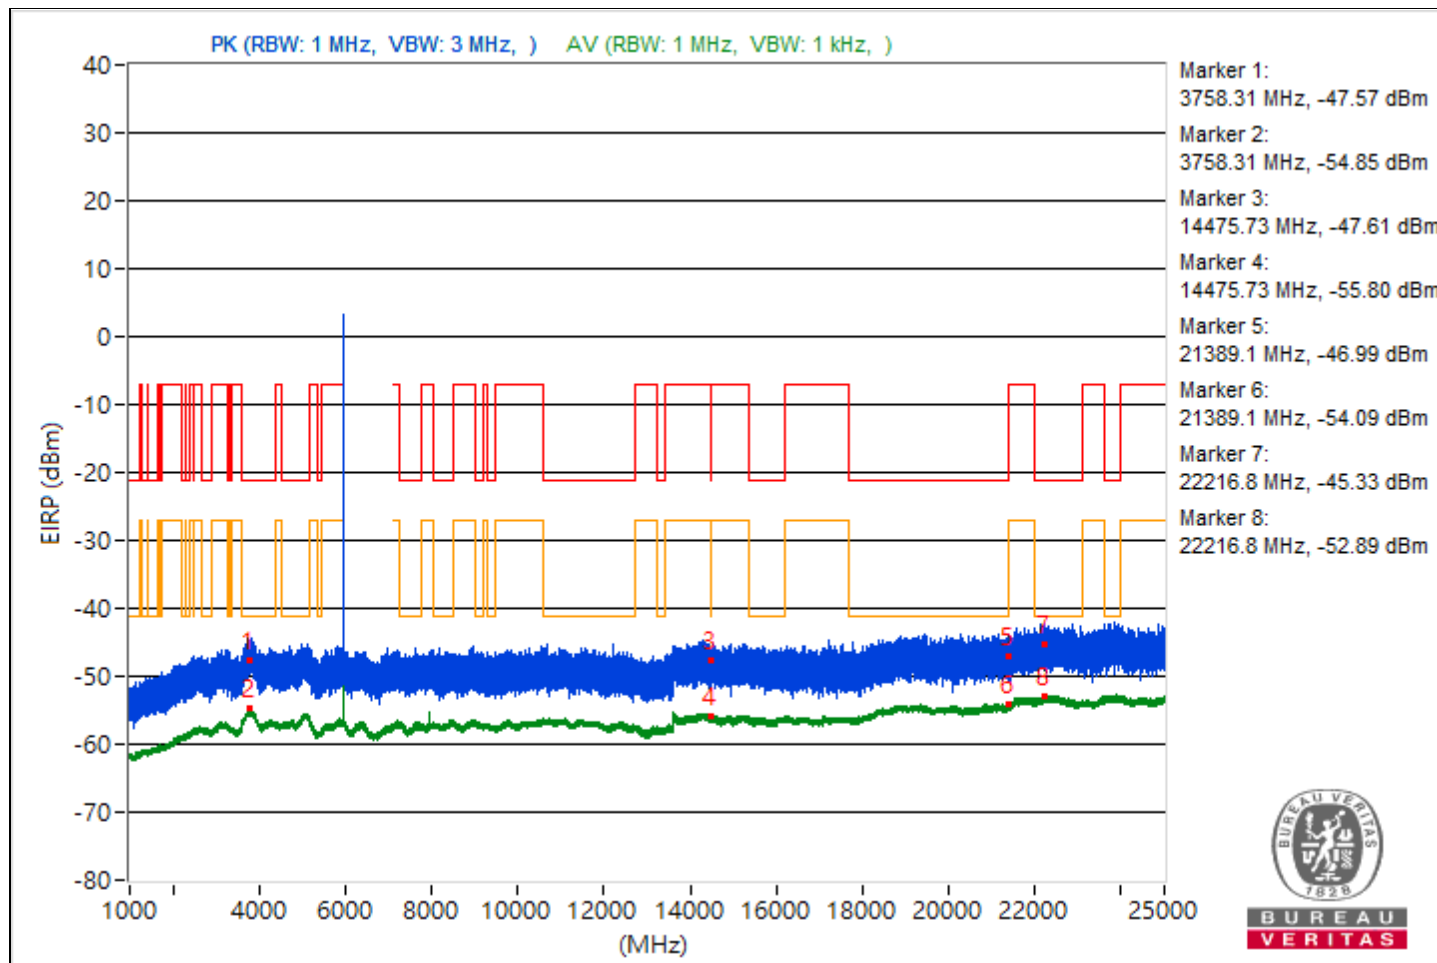


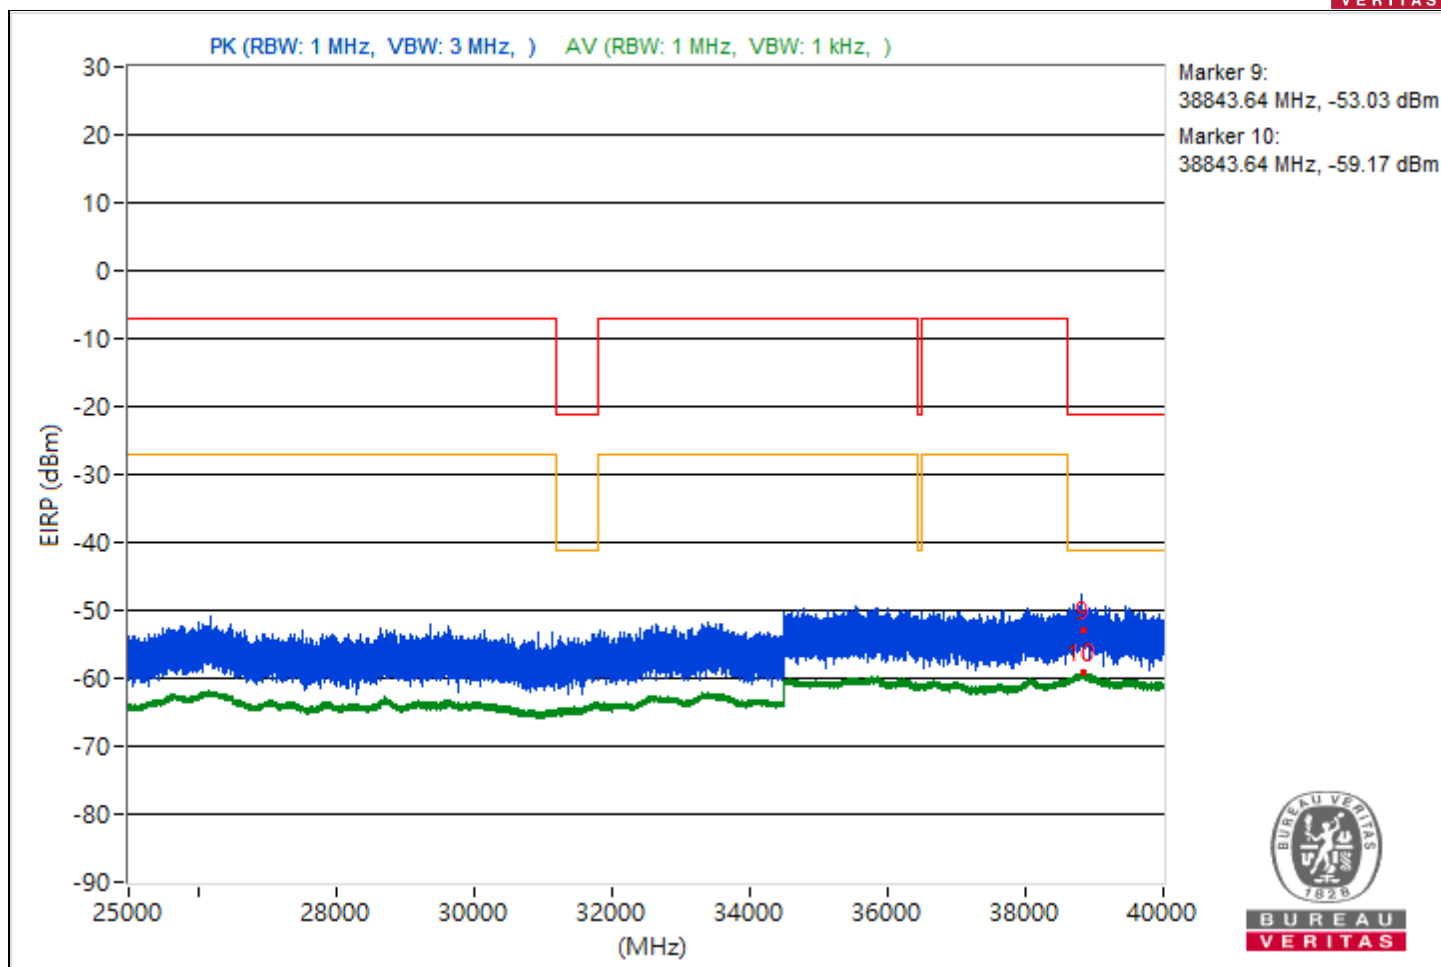


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.24	47.45 PK	74	-26.55	-58.09	-59.52	7.93	-47.81
2	3801.24	40.16 AV	54	-13.84	-66.4	-65.71	7.93	-55.1
3	14478.84	46.84 PK	74	-27.16	-60.21	-58.65	7.93	-48.42
4	14478.84	39.37 AV	54	-14.63	-67.22	-66.47	7.93	-55.89
5	21179.2	47.69 PK	74	-26.31	-58.76	-58.27	7.93	-47.57
6	21179.2	40.96 AV	54	-13.04	-64.81	-65.71	7.93	-54.3
7	23767.8	50.05 PK	74	-23.95	-55.41	-57.05	7.93	-45.21
8	23767.8	42.35 AV	54	-11.65	-64.22	-63.51	7.93	-52.91
9	38831.2	41.5 PK	74	-32.5	-66.34	-63.52	7.93	-53.76
10	38831.2	36.09 AV	54	-17.91	-69.85	-70.38	7.93	-59.17

Note: Margin value = Emission Level - Limit value

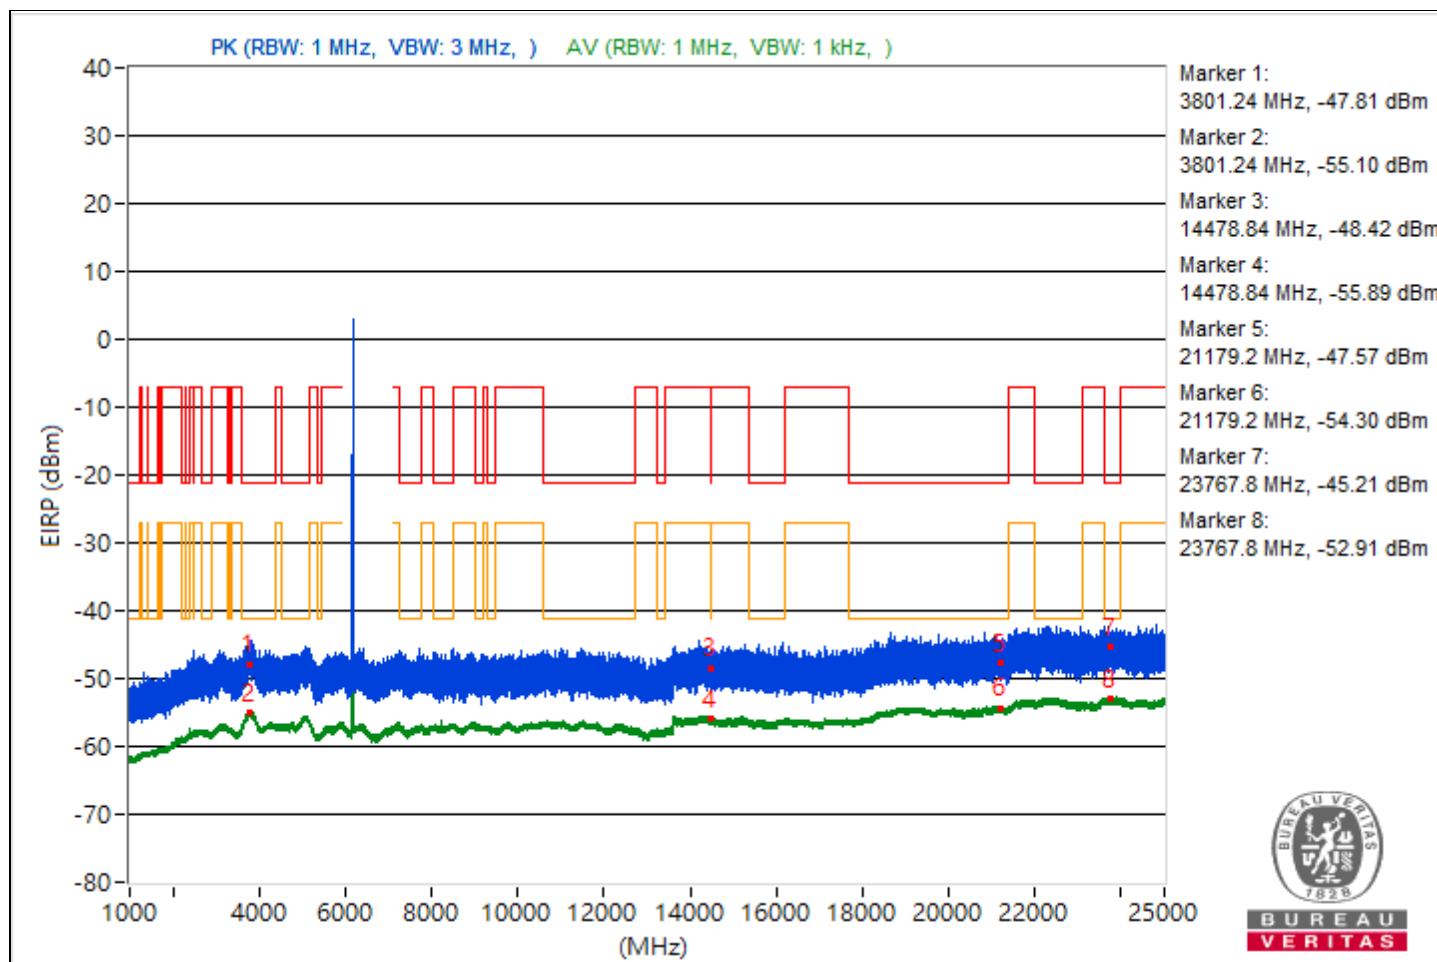


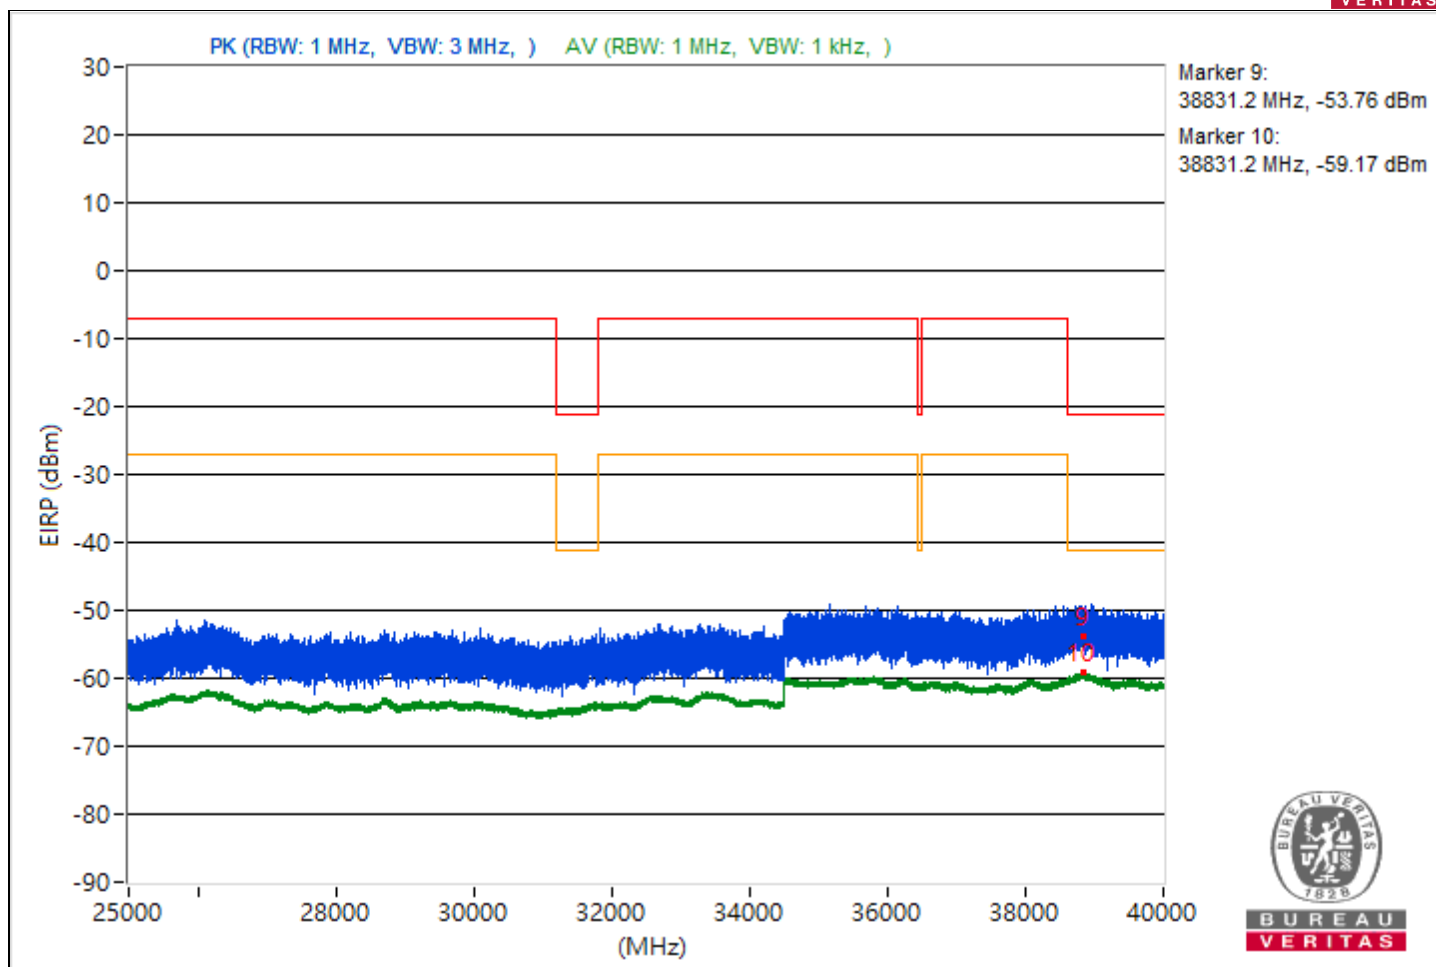


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.36	48.62 PK	74	-25.38	-58	-57.19	7.93	-46.64
2	3797.36	40.39 AV	54	-13.61	-65.56	-66.08	7.93	-54.87
3	14483.29	47.29 PK	74	-26.71	-58.76	-59.06	7.93	-47.97
4	14483.29	39.22 AV	54	-14.78	-66.69	-67.3	7.93	-56.04
5	21140.4	48.02 PK	74	-25.98	-56.88	-60.05	7.93	-47.24
6	21140.4	41.27 AV	54	-12.73	-64.78	-65.09	7.93	-53.99
7	23677.9	49.36 PK	74	-24.64	-57.72	-56.12	7.93	-45.9
8	23677.9	42.37 AV	54	-11.63	-63.5	-64.2	7.93	-52.89
9	38858.22	42.56 PK	74	-31.44	-62.54	-65.12	7.93	-52.7
10	38858.22	35.98 AV	54	-18.02	-69.84	-70.63	7.93	-59.28

Note: Margin value = Emission Level - Limit value

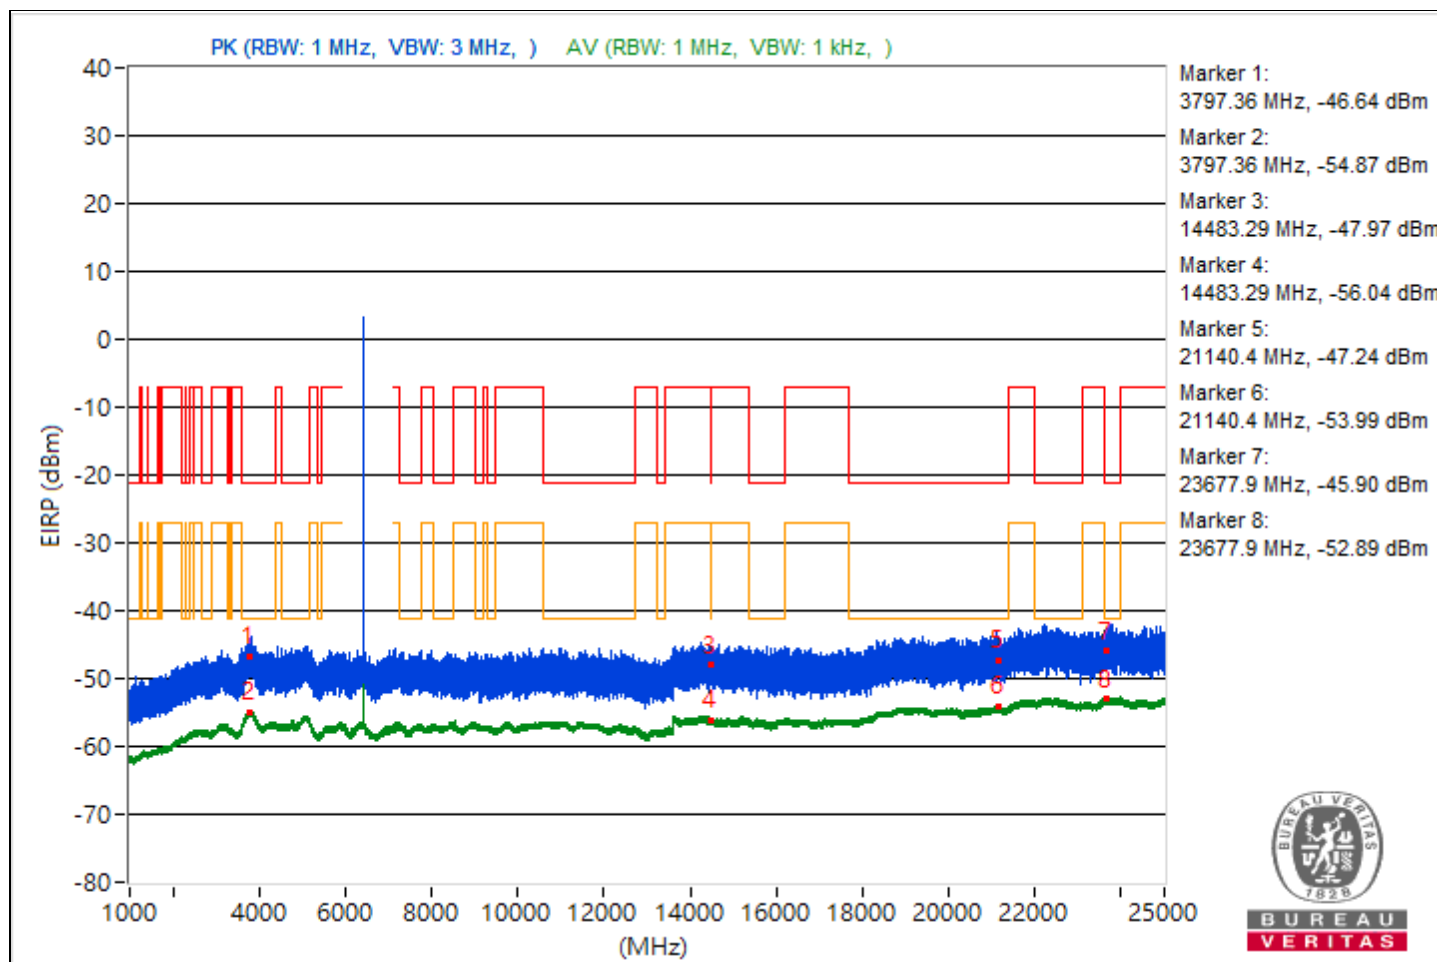


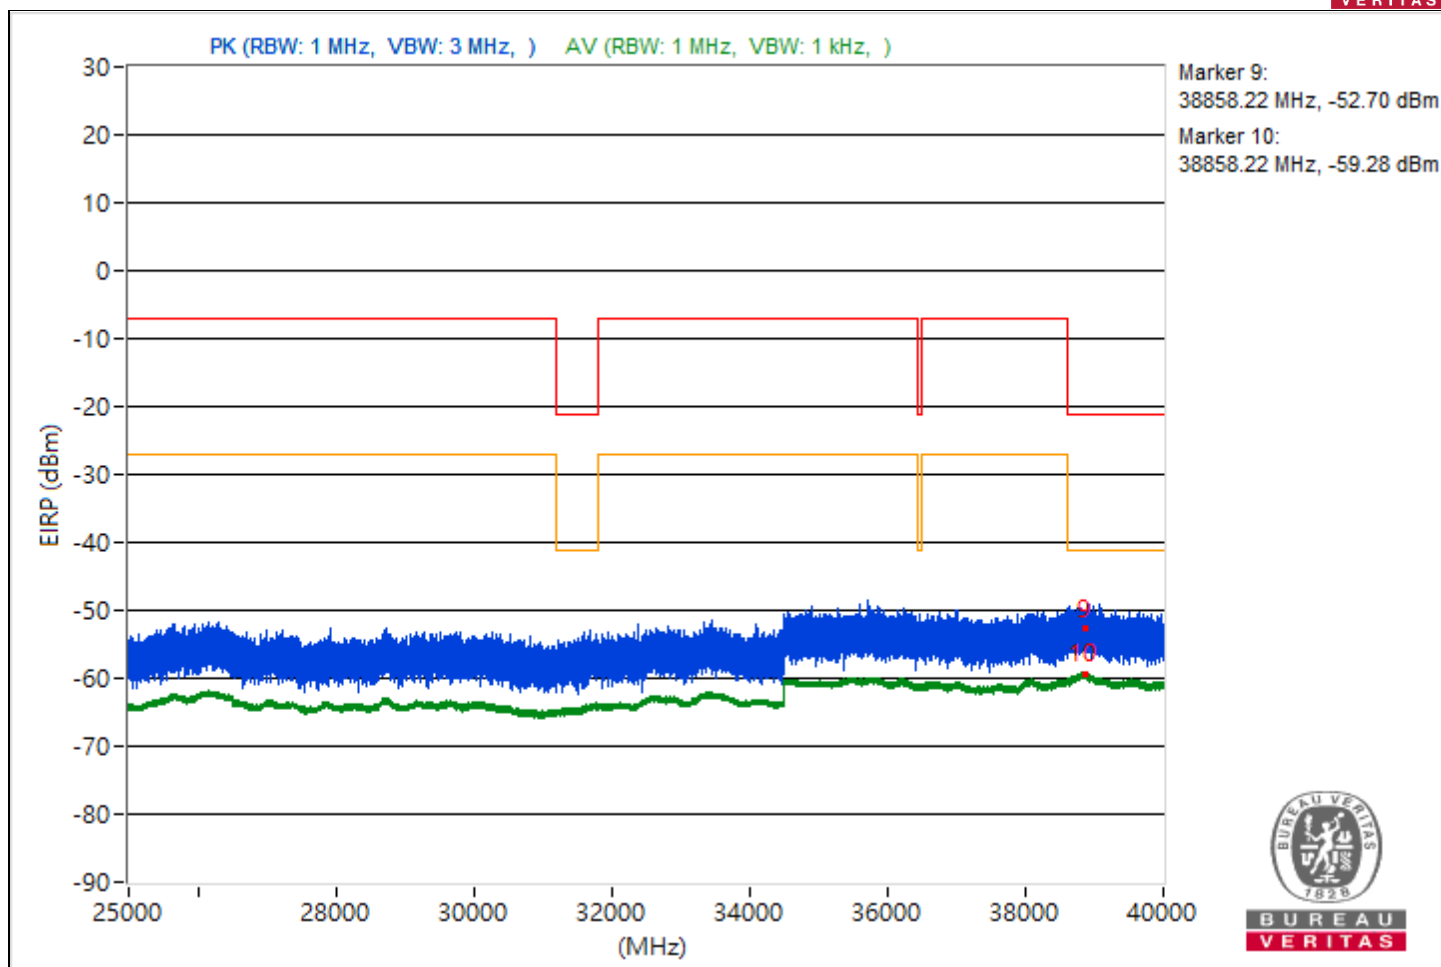


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.92	46.16 PK	74	-27.84	-59.99	-60.08	7.93	-49.1
2	3806.92	40.34 AV	54	-13.66	-65.92	-65.8	7.93	-54.92
3	14489.6	45.67 PK	74	-28.33	-60.74	-60.34	7.93	-49.59
4	14489.6	39.5 AV	54	-14.5	-66.45	-66.96	7.93	-55.76
5	21086.9	47.67 PK	74	-26.33	-57.62	-59.68	7.93	-47.59
6	21086.9	41.05 AV	54	-12.95	-65.67	-64.68	7.93	-54.21
7	23653.3	50.06 PK	74	-23.94	-56.9	-55.5	7.93	-45.2
8	23653.3	42.54 AV	54	-11.46	-63.53	-63.8	7.93	-52.72
9	38806.31	43.6 PK	74	-30.4	-63.09	-62.15	7.93	-51.66
10	38806.31	35.87 AV	54	-18.13	-69.91	-70.8	7.93	-59.39

Note: Margin value = Emission Level - Limit value

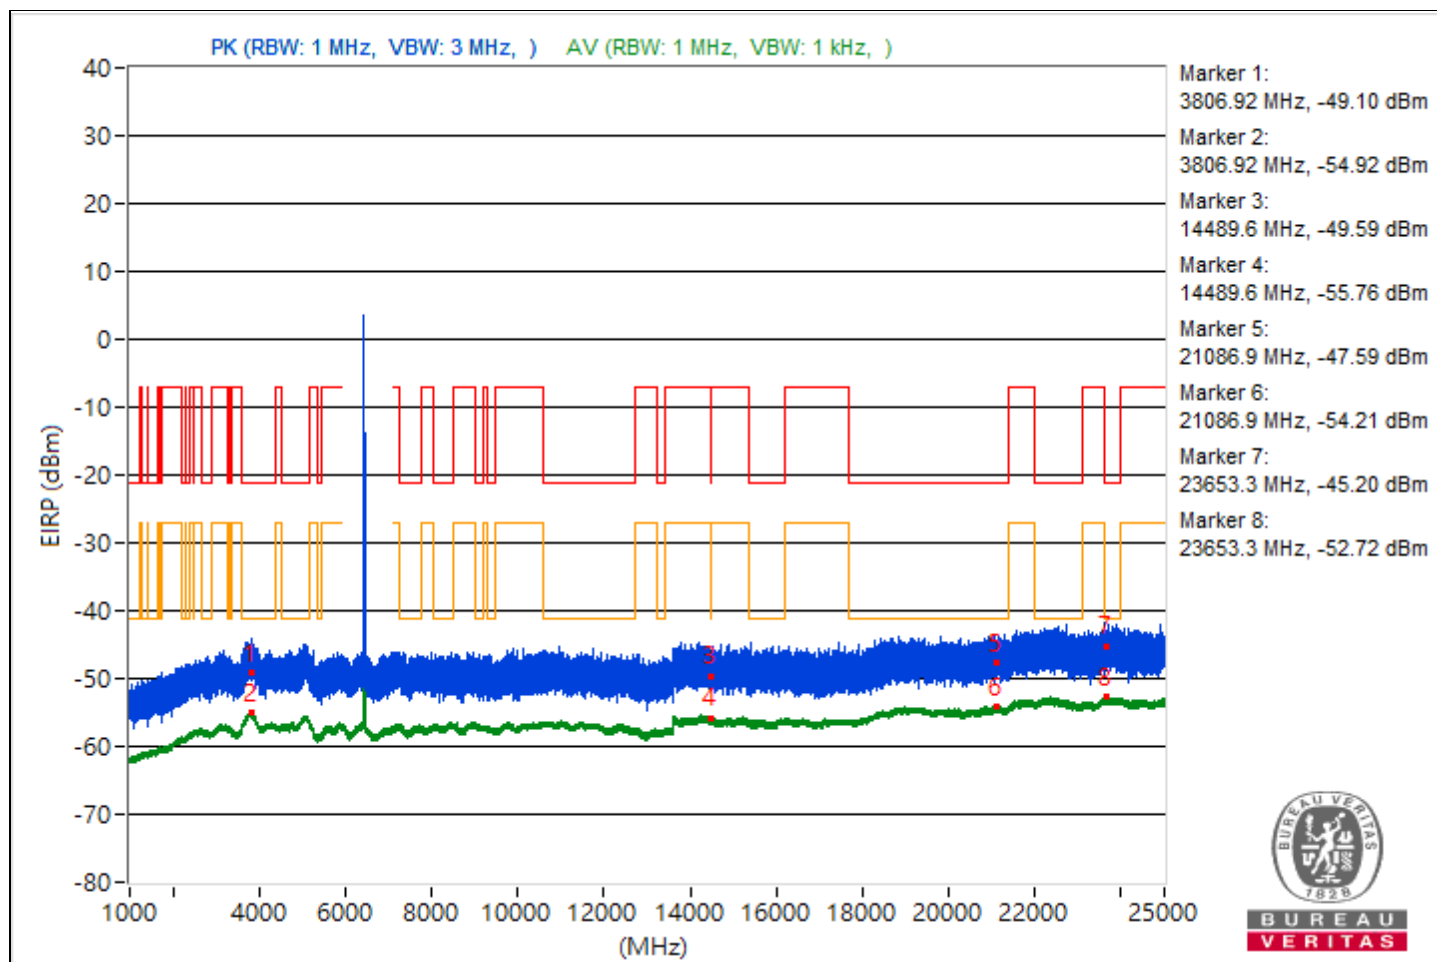


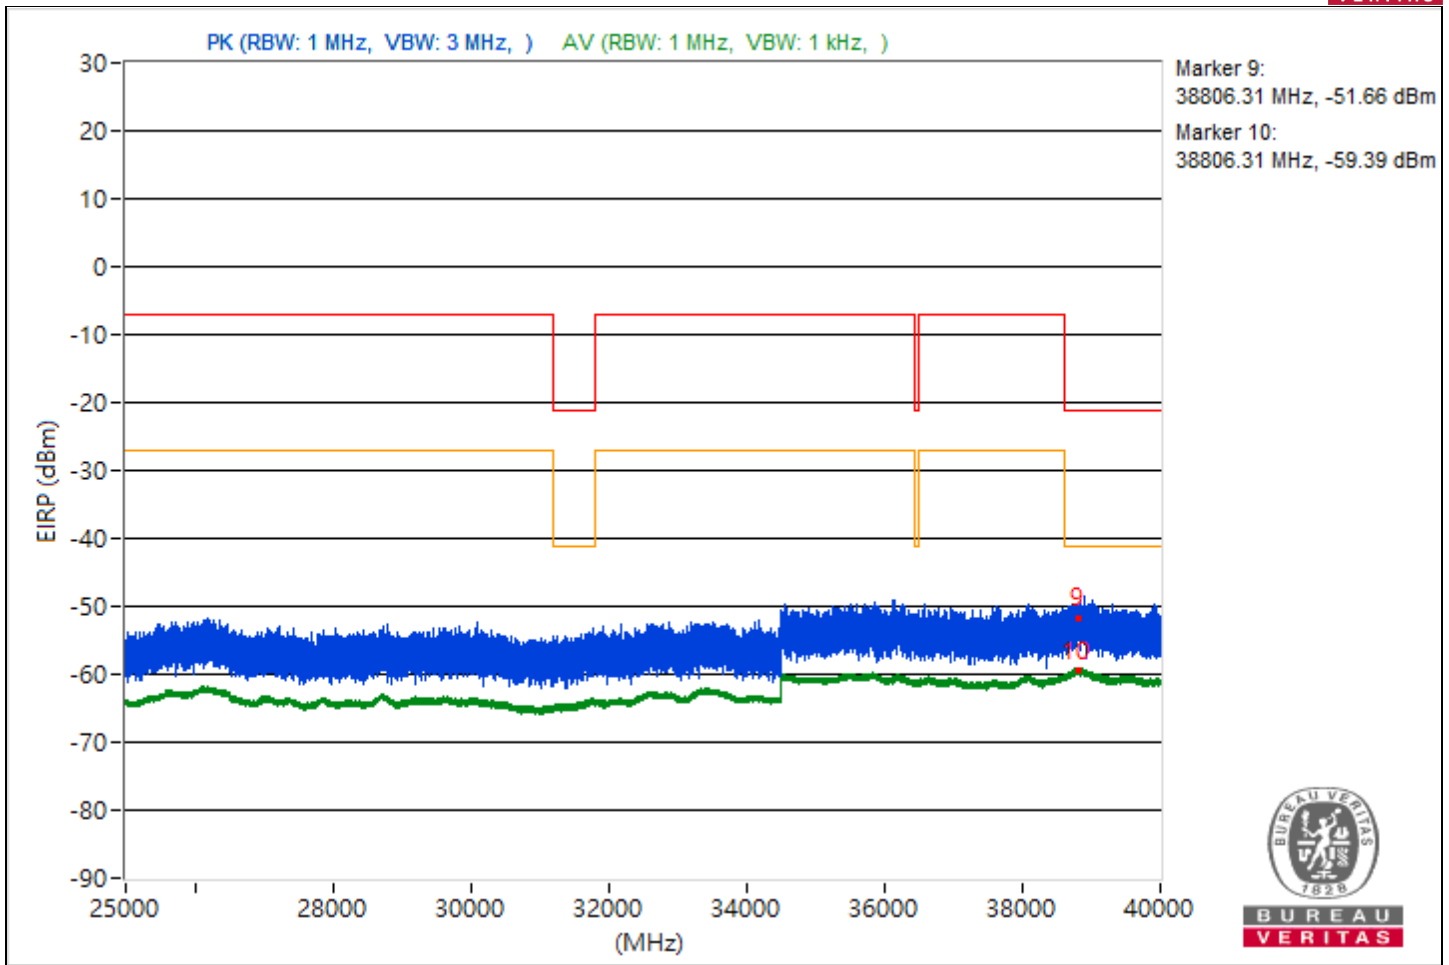


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.16	48.42 PK	74	-25.58	-57.3	-58.32	7.93	-46.84
2	3821.16	40.31 AV	54	-13.69	-65.48	-66.34	7.93	-54.95
3	14474.84	47.47 PK	74	-26.53	-58.47	-59.01	7.93	-47.79
4	14474.84	39.32 AV	54	-14.68	-67.07	-66.69	7.93	-55.94
5	21148.2	48.55 PK	74	-25.45	-57.81	-57.49	7.93	-46.71
6	21148.2	41.25 AV	54	-12.75	-65.19	-64.72	7.93	-54.01
7	23639.5	50 PK	74	-24	-54.94	-57.97	7.93	-45.26
8	23639.5	42.49 AV	54	-11.51	-63.38	-64.06	7.93	-52.77
9	38846.13	41.68 PK	74	-32.32	-64.85	-64.21	7.93	-53.58
10	38846.13	36.1 AV	54	-17.9	-69.85	-70.37	7.93	-59.16

Note: Margin value = Emission Level - Limit value

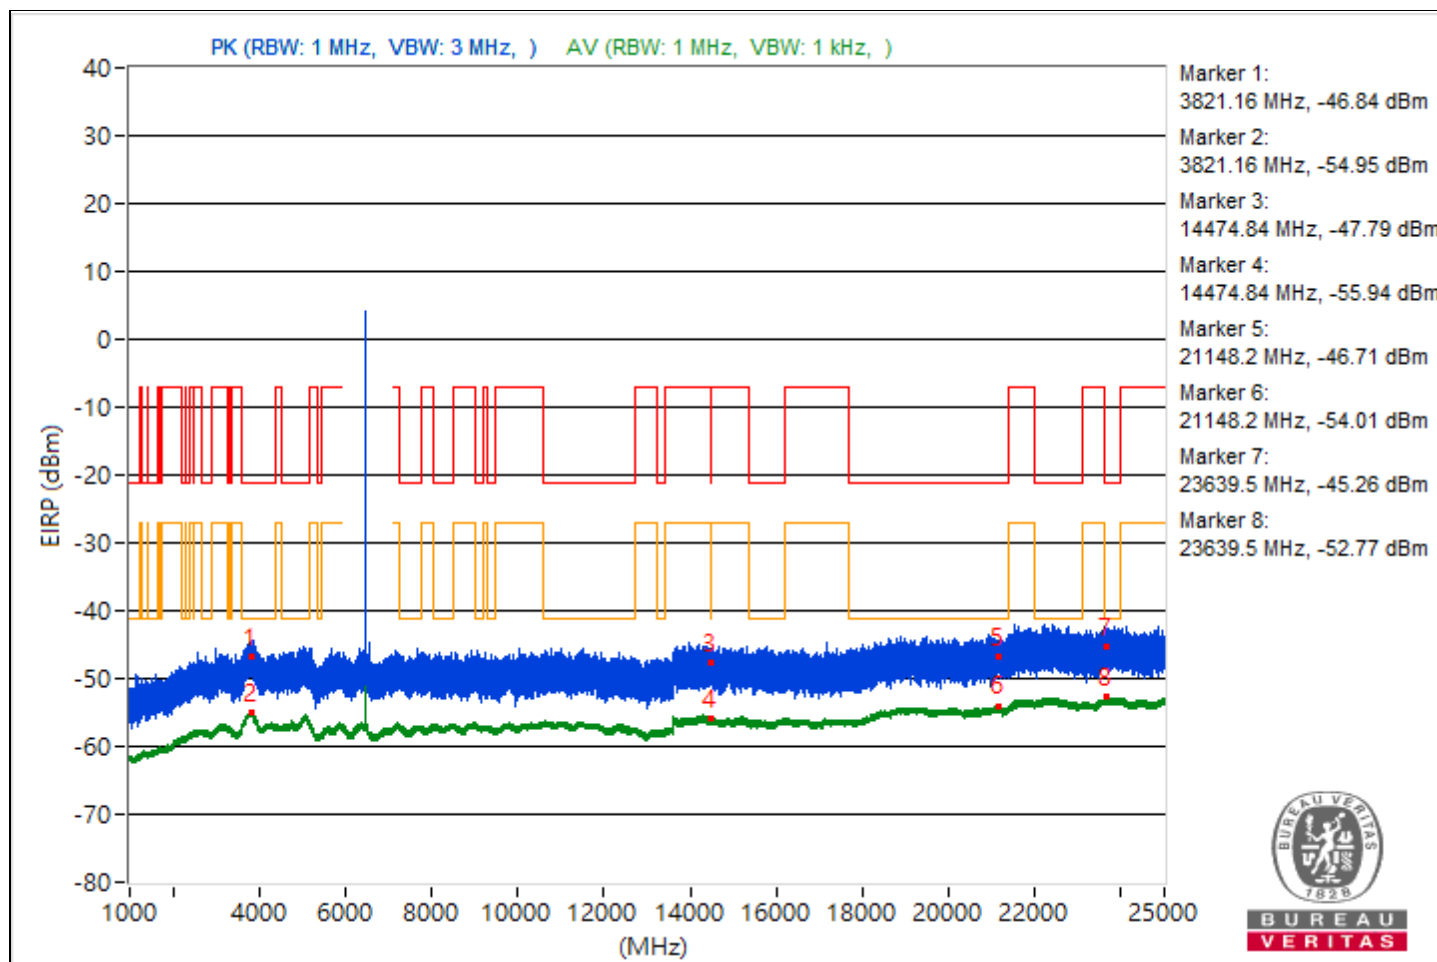


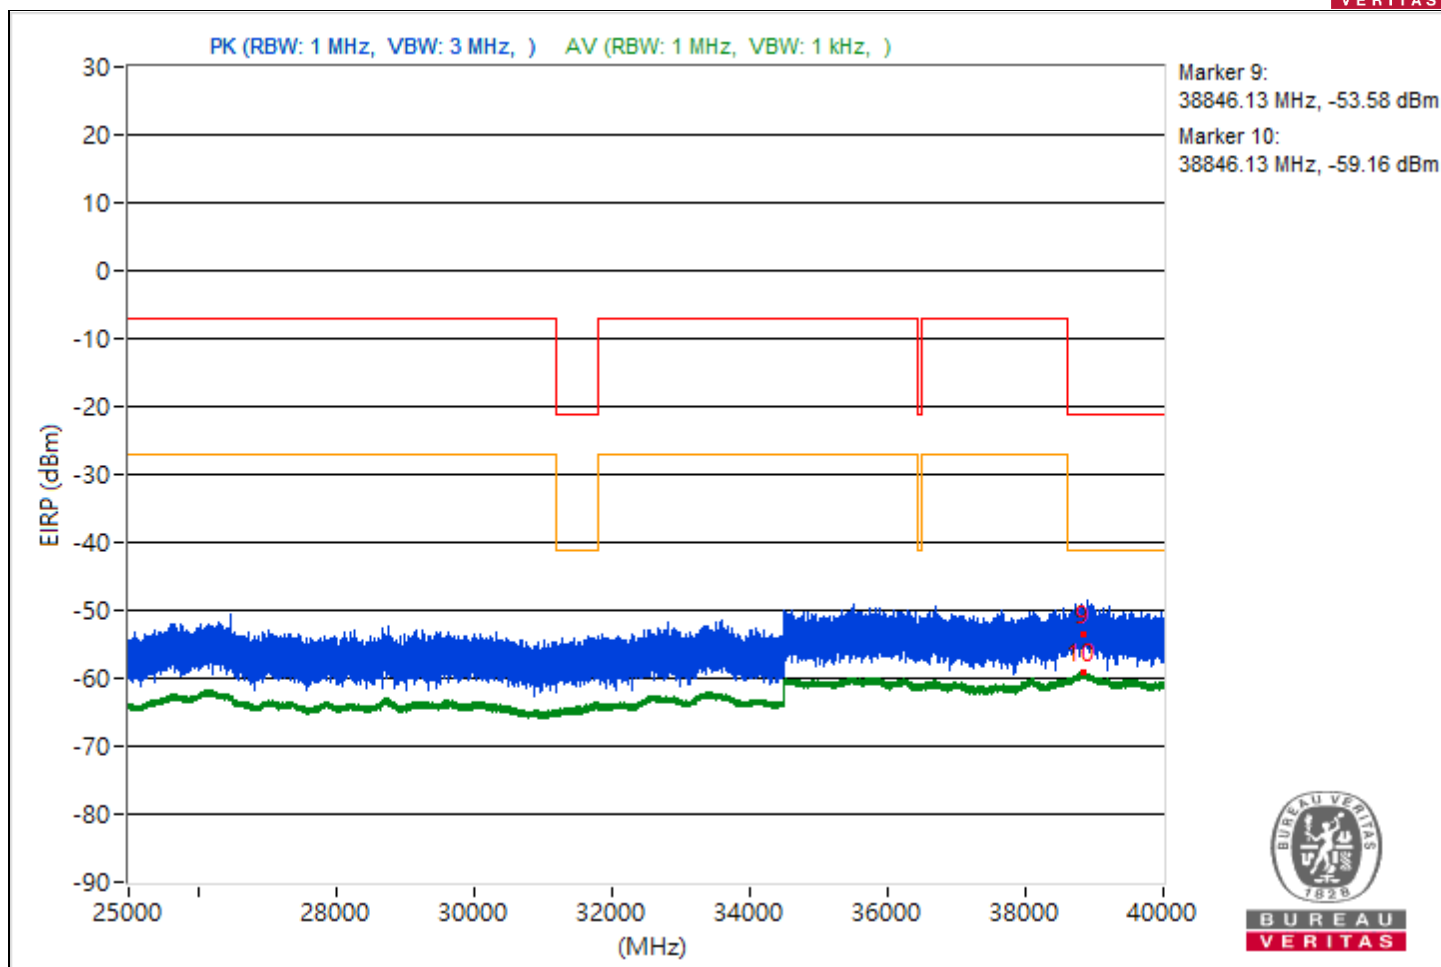


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.69	46.94 PK	74	-27.06	-59.85	-58.74	7.93	-48.32
2	3820.69	40.3 AV	54	-13.7	-66.14	-65.67	7.93	-54.96
3	14493.87	47.02 PK	74	-26.98	-59.64	-58.75	7.93	-48.24
4	14493.87	39.34 AV	54	-14.66	-66.51	-67.24	7.93	-55.92
5	21154.7	48.03 PK	74	-25.97	-59.69	-57.05	7.93	-47.23
6	21154.7	41.15 AV	54	-12.85	-65.32	-64.79	7.93	-54.11
7	23931.3	48.87 PK	74	-25.13	-56.33	-58.64	7.93	-46.39
8	23931.3	42.29 AV	54	-11.71	-63.45	-64.43	7.93	-52.97
9	38803.02	41.22 PK	74	-32.78	-63.66	-66.91	7.93	-54.04
10	38803.02	35.98 AV	54	-18.02	-69.83	-70.65	7.93	-59.28

Note: Margin value = Emission Level - Limit value

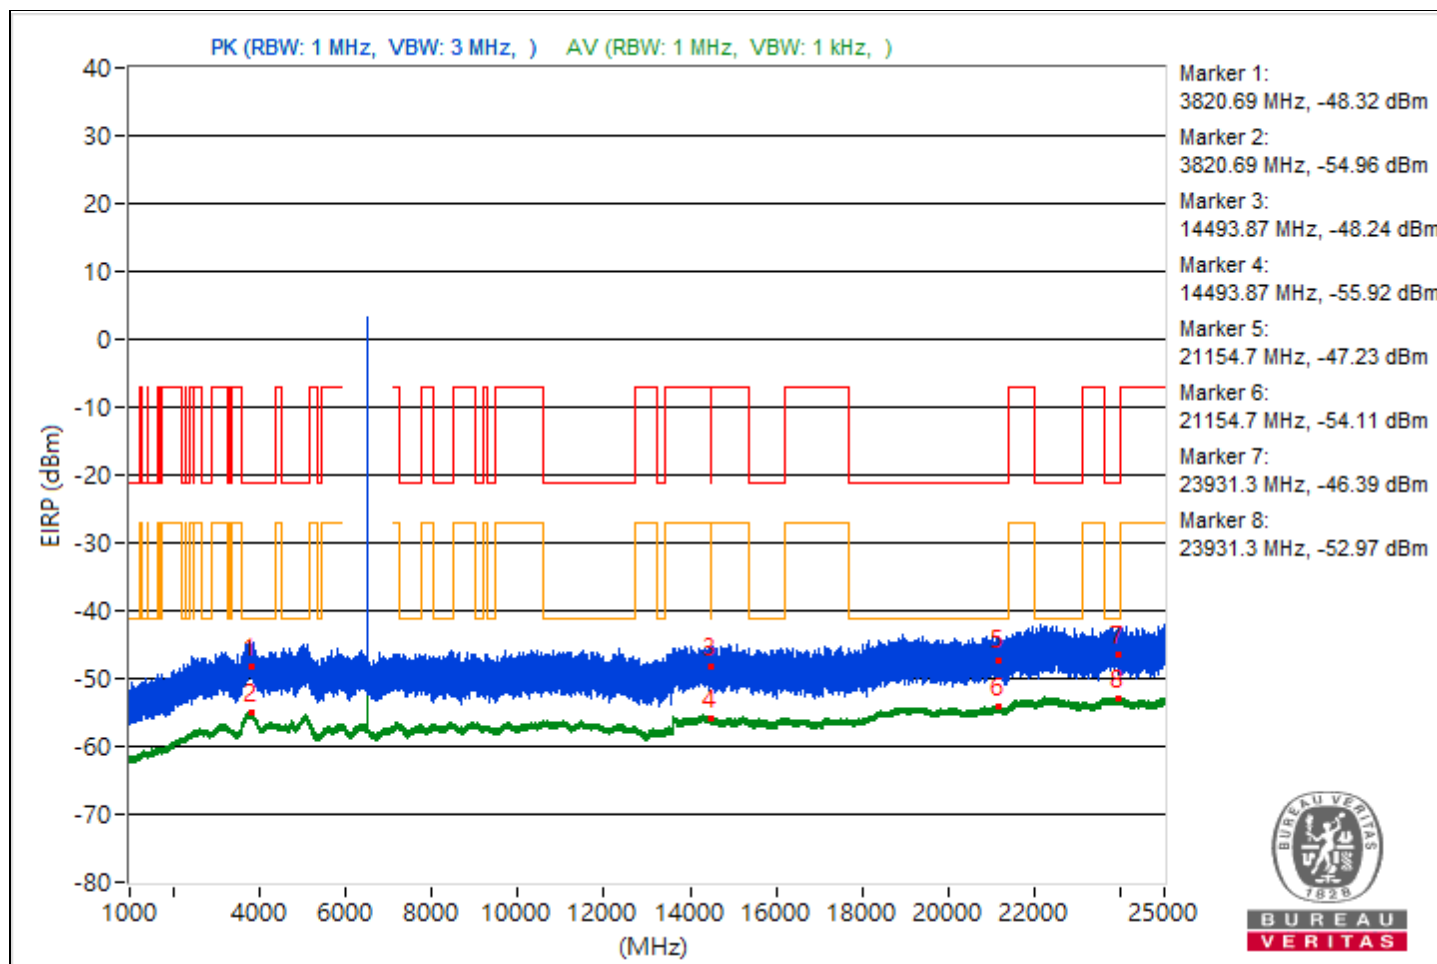


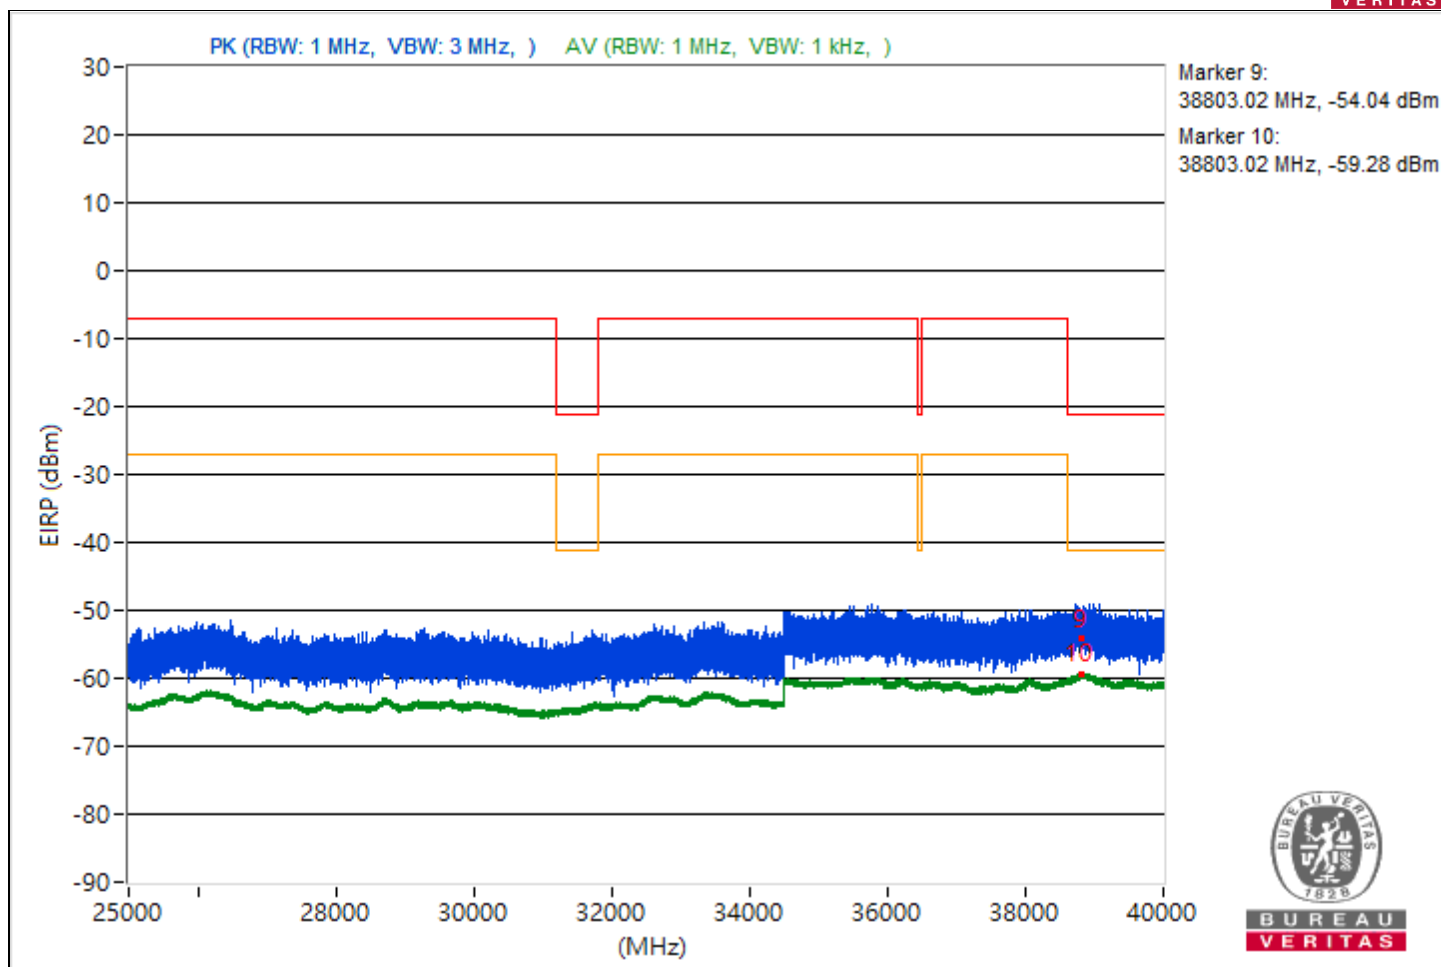


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3830.41	47.62 PK	74	-26.38	-58.19	-59.02	7.93	-47.64
2	3830.41	40.35 AV	54	-13.65	-65.89	-65.81	7.93	-54.91
3	14487.38	46.43 PK	74	-27.57	-60.18	-59.4	7.93	-48.83
4	14487.38	39.48 AV	54	-14.52	-66.6	-66.83	7.93	-55.78
5	21150.4	48.03 PK	74	-25.97	-57.56	-58.89	7.93	-47.23
6	21150.4	41.25 AV	54	-12.75	-64.75	-65.17	7.93	-54.01
7	22241.3	47.61 PK	74	-26.39	-60.74	-57.17	7.93	-47.65
8	22241.3	42.6 AV	54	-11.4	-63.32	-63.89	7.93	-52.66
9	38799.82	44.05 PK	74	-29.95	-61.8	-62.52	7.93	-51.21
10	38799.82	36.04 AV	54	-17.96	-70.41	-69.94	7.93	-59.22

Note: Margin value = Emission Level - Limit value

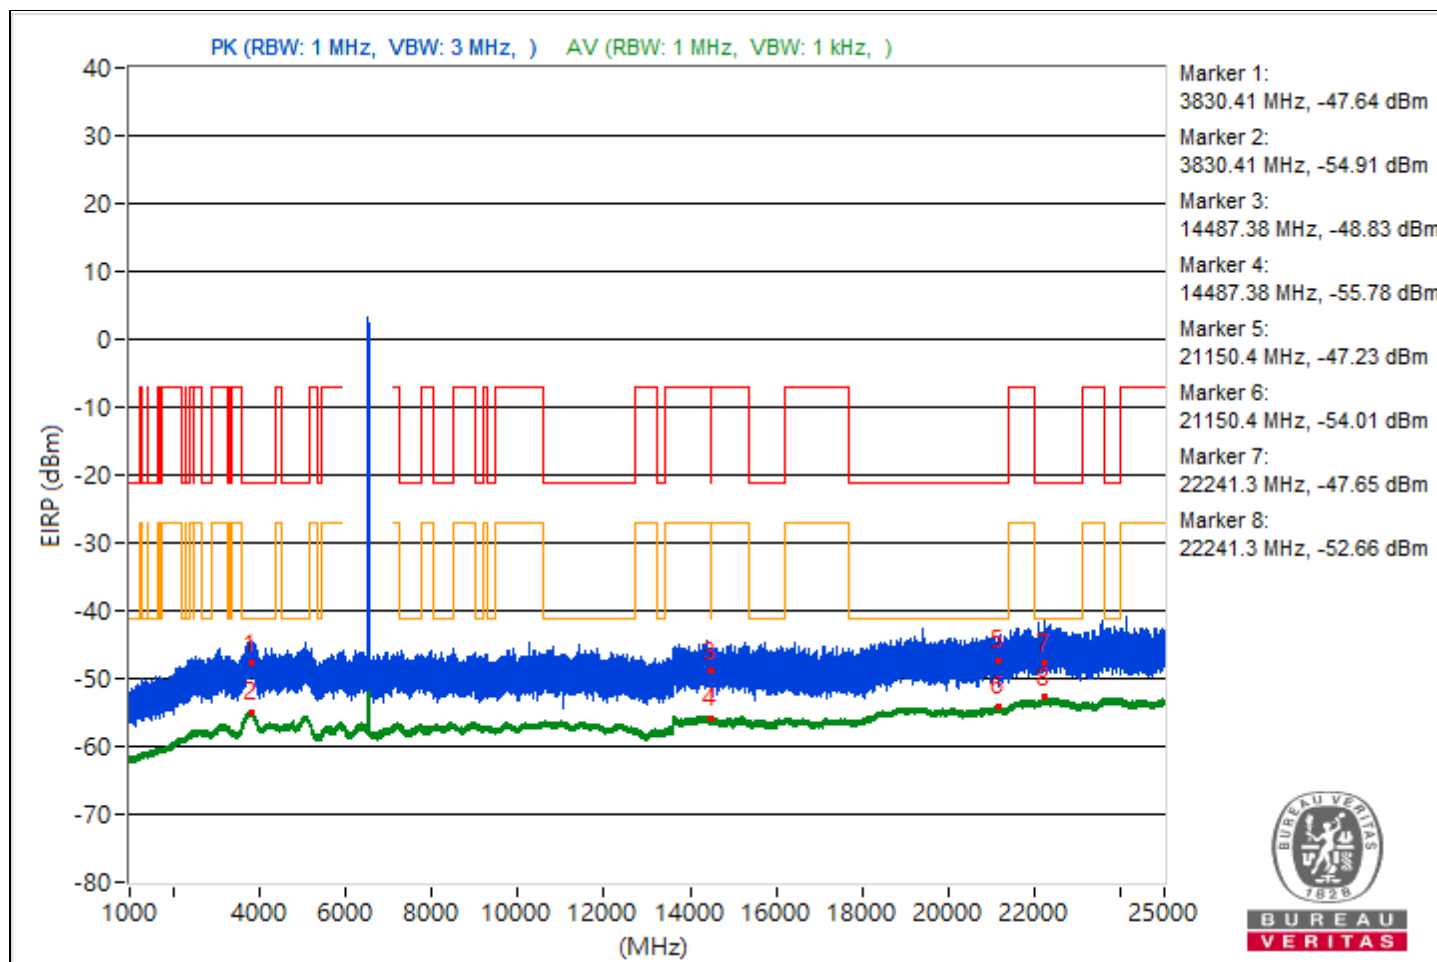


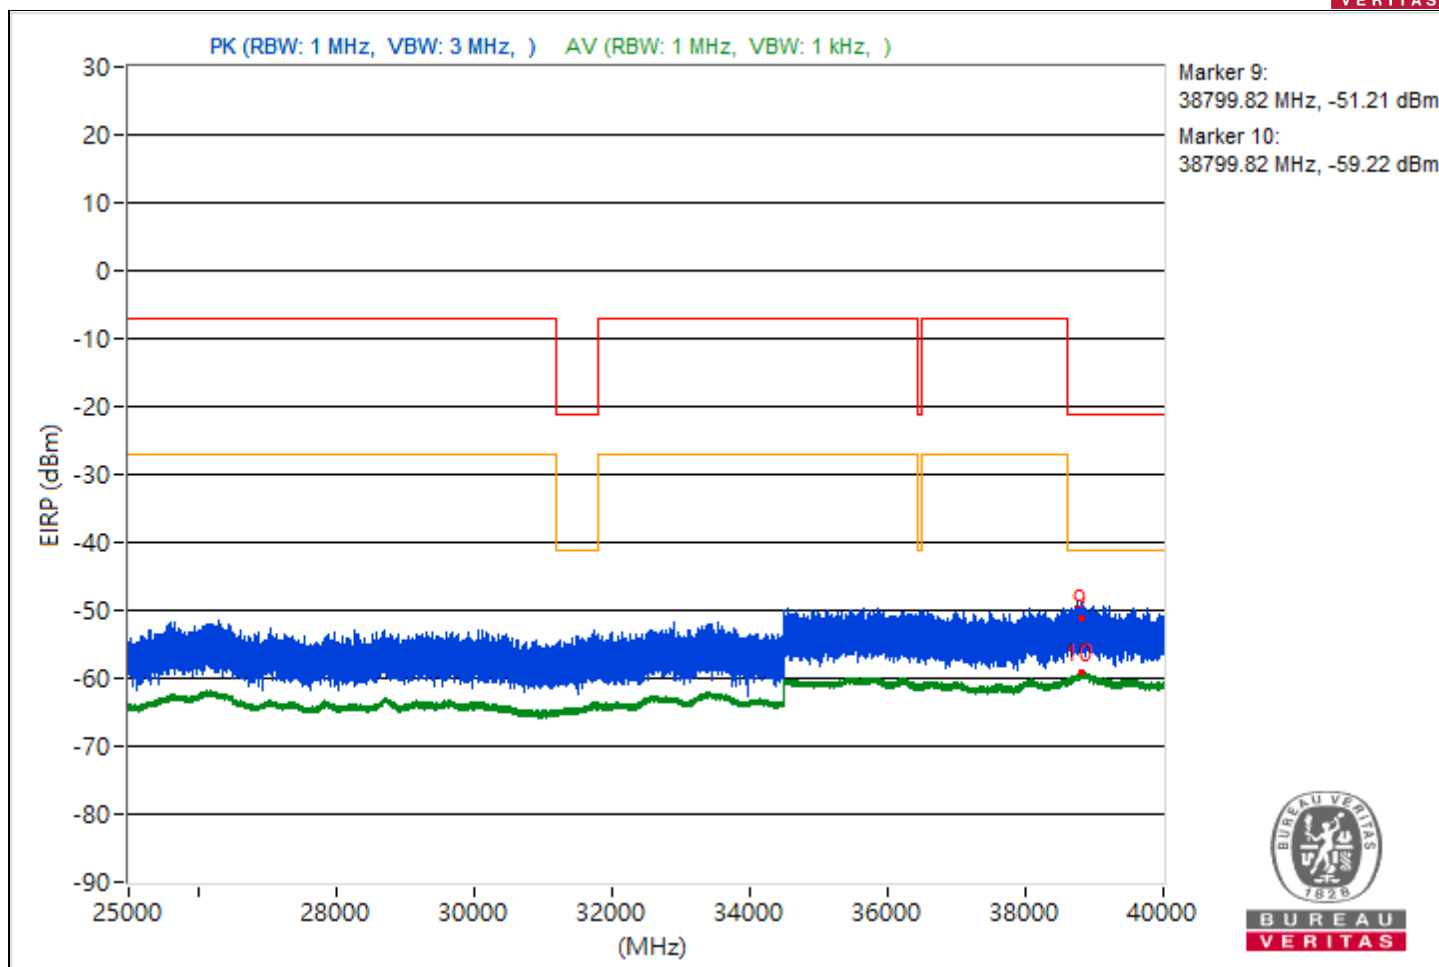


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.34	46.83 PK	74	-27.17	-59.59	-59.16	7.93	-48.43
2	3789.34	40.33 AV	54	-13.67	-66.06	-65.69	7.93	-54.93
3	14477.51	46.82 PK	74	-27.18	-58.62	-60.31	7.93	-48.44
4	14477.51	39.45 AV	54	-14.55	-67.08	-66.44	7.93	-55.81
5	20884.9	49.72 PK	74	-24.28	-57.14	-55.9	7.93	-45.54
6	20884.9	41.04 AV	54	-12.96	-65.66	-64.71	7.93	-54.22
7	22441.5	49.5 PK	74	-24.5	-56.66	-56.75	7.93	-45.76
8	22441.5	42.54 AV	54	-11.46	-63.78	-63.55	7.93	-52.72
9	38803.64	43.51 PK	74	-30.49	-62.02	-63.48	7.93	-51.75
10	38803.64	36.03 AV	54	-17.97	-69.88	-70.48	7.93	-59.23

Note: Margin value = Emission Level - Limit value

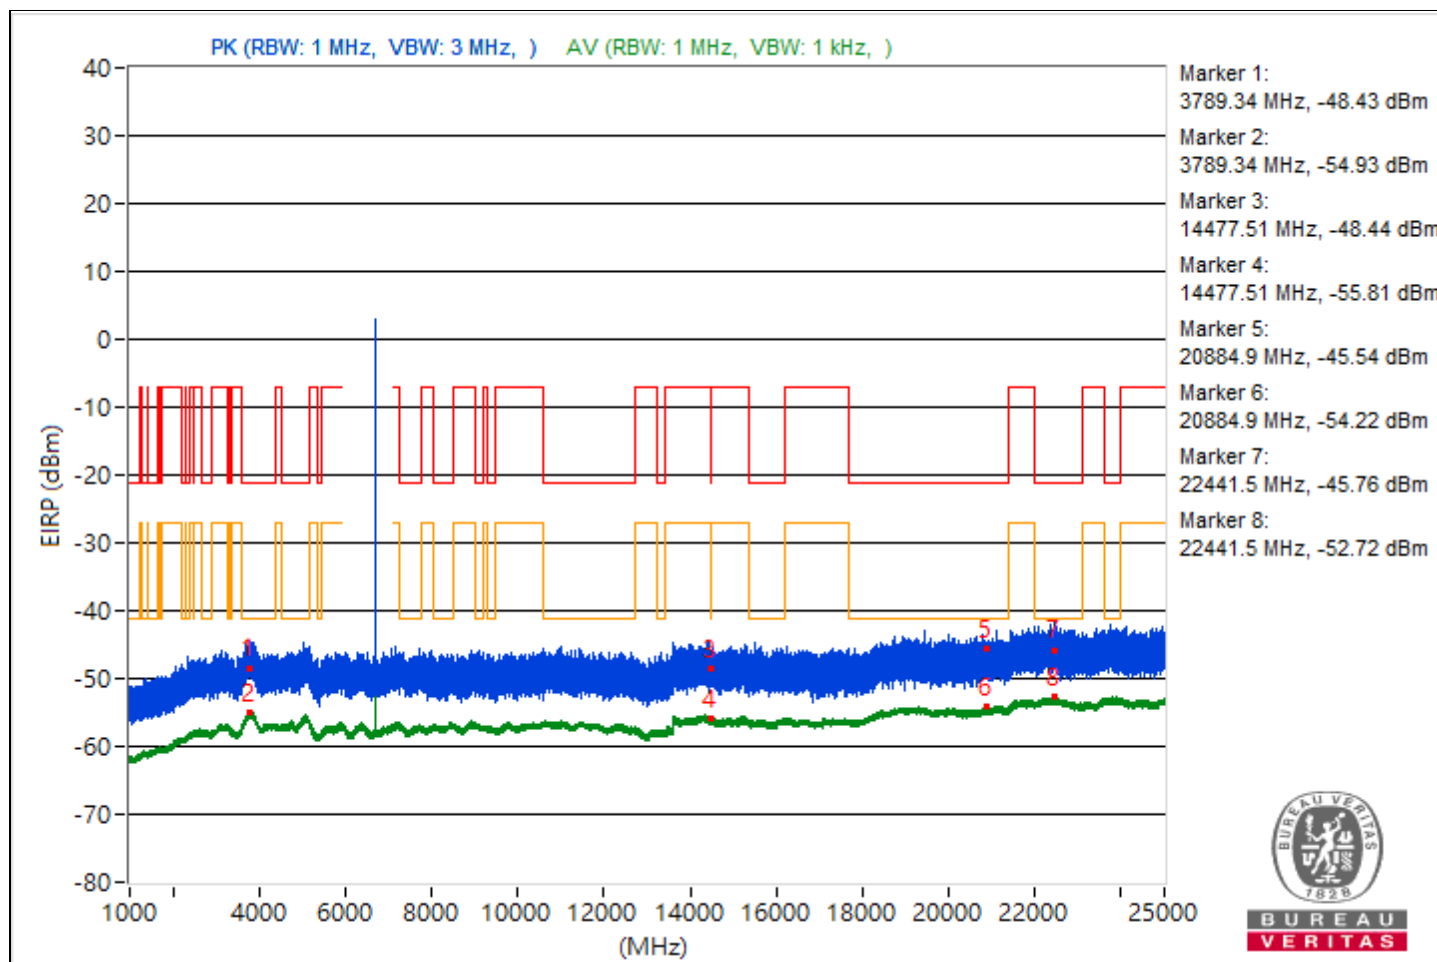


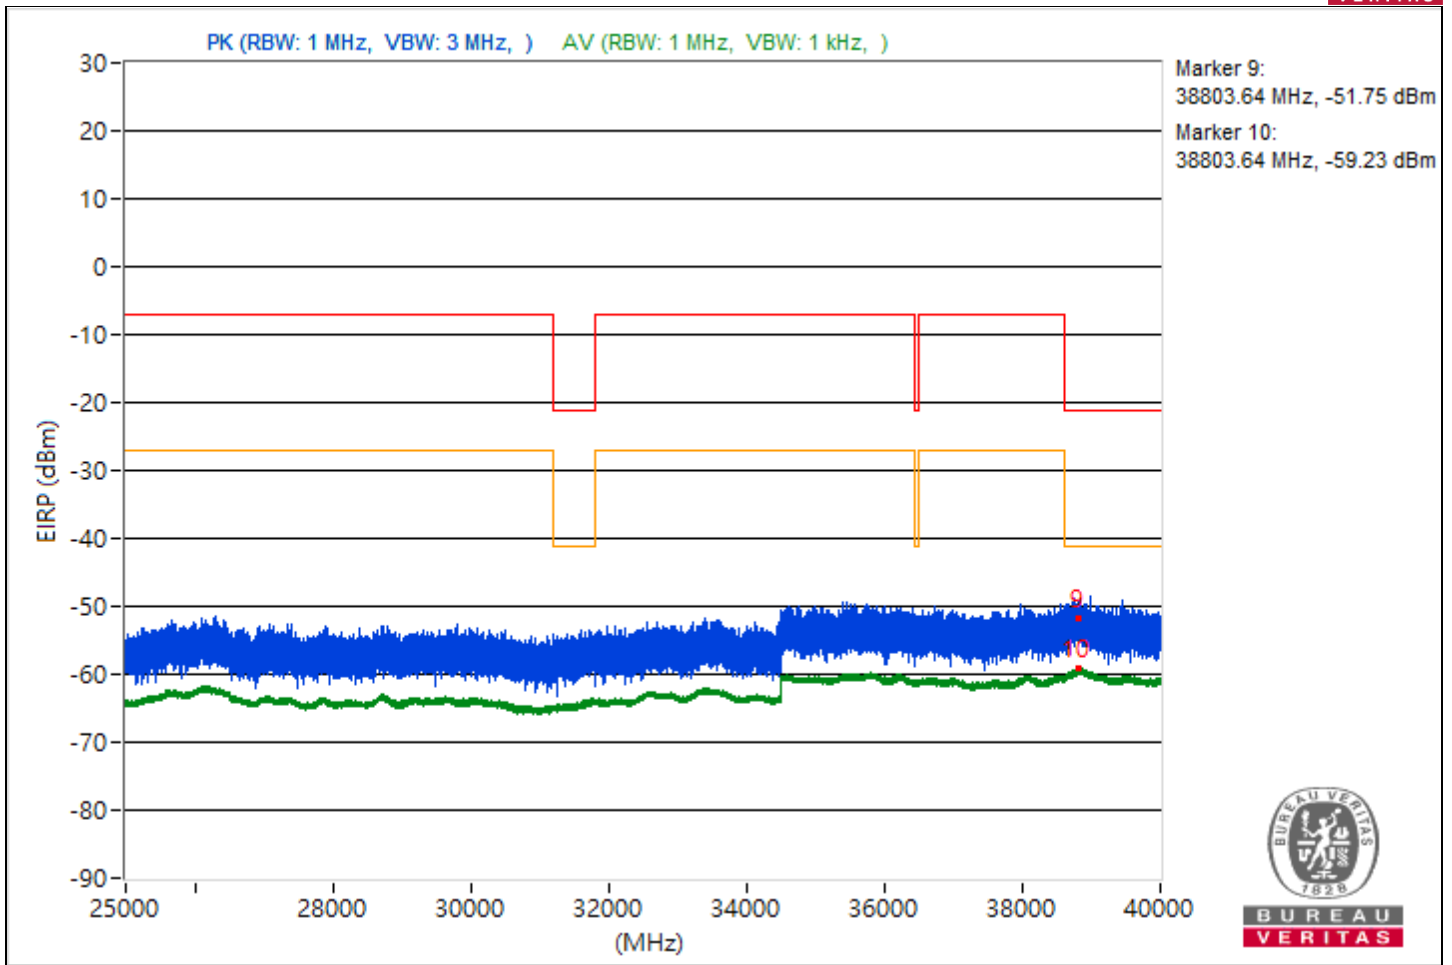


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3800.47	48.03 PK	74	-25.97	-57.29	-59.29	7.93	-47.23
2	3800.47	40.51 AV	54	-13.49	-65.44	-65.96	7.93	-54.75
3	14477.24	46.42 PK	74	-27.58	-58.49	-61.61	7.93	-48.84
4	14477.24	39.39 AV	54	-14.61	-67.24	-66.42	7.93	-55.87
5	21130.3	47.93 PK	74	-26.07	-58.95	-57.68	7.93	-47.33
6	21130.3	41.11 AV	54	-12.89	-65.33	-64.86	7.93	-54.15
7	23893.9	49.79 PK	74	-24.21	-57.57	-55.5	7.93	-45.47
8	23893.9	42.51 AV	54	-11.49	-63.96	-63.43	7.93	-52.75
9	38827.29	40.89 PK	74	-33.11	-65.25	-65.37	7.93	-54.37
10	38827.29	36.11 AV	54	-17.89	-69.85	-70.35	7.93	-59.15

Note: Margin value = Emission Level - Limit value

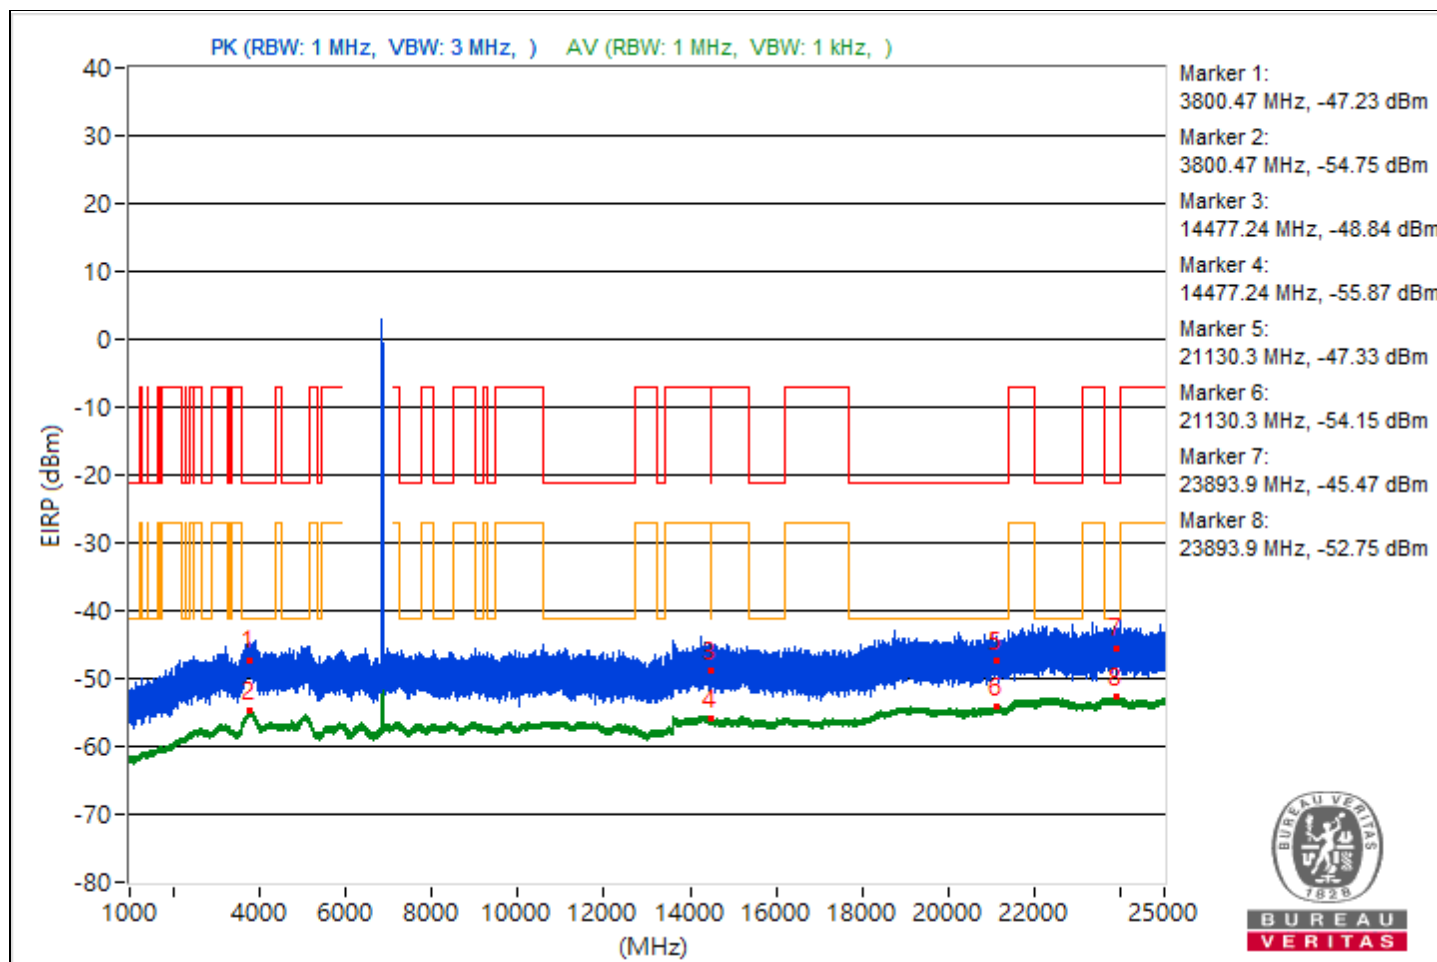


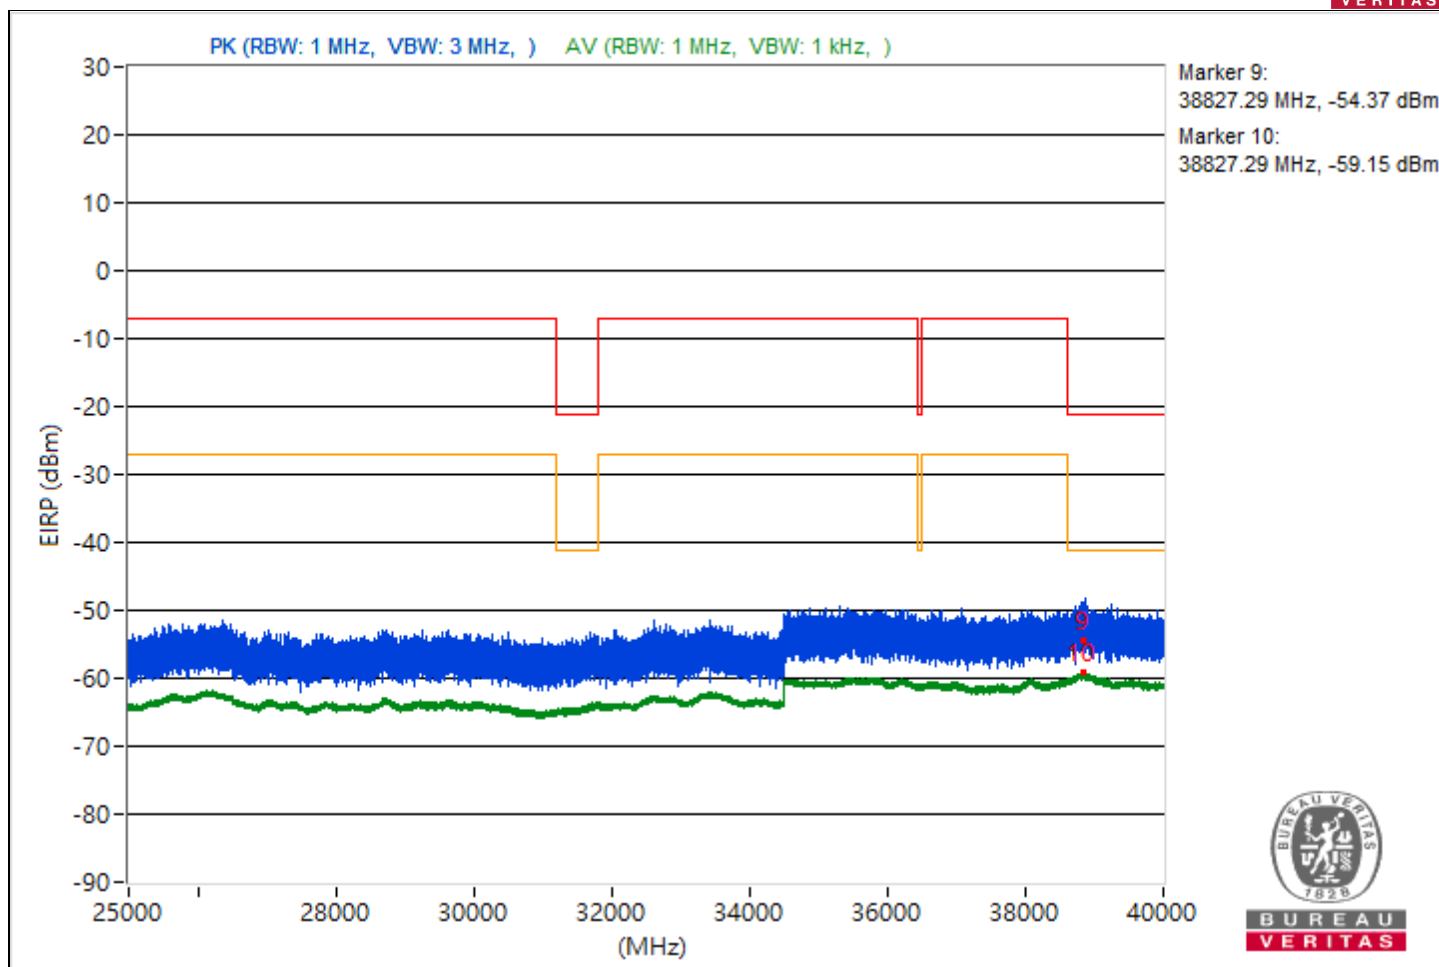


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.58	46.52 PK	74	-27.48	-60.79	-58.79	7.93	-48.74
2	3782.58	40.45 AV	54	-13.55	-65.93	-65.57	7.93	-54.81
3	14475.2	47.43 PK	74	-26.57	-58.59	-58.95	7.93	-47.83
4	14475.2	39.36 AV	54	-14.64	-67.06	-66.64	7.93	-55.9
5	21398.2	47.31 PK	74	-26.69	-58.59	-59.21	7.93	-47.95
6	21398.2	41.23 AV	54	-12.77	-65.18	-64.78	7.93	-54.03
7	23614.3	49.83 PK	74	-24.17	-54.95	-58.48	7.93	-45.43
8	23614.3	42.19 AV	54	-11.81	-63.56	-64.51	7.93	-53.07
9	38857.87	43.31 PK	74	-30.69	-62.49	-63.34	7.93	-51.95
10	38857.87	36.13 AV	54	-17.87	-69.92	-70.23	7.93	-59.13

Note: Margin value = Emission Level - Limit value

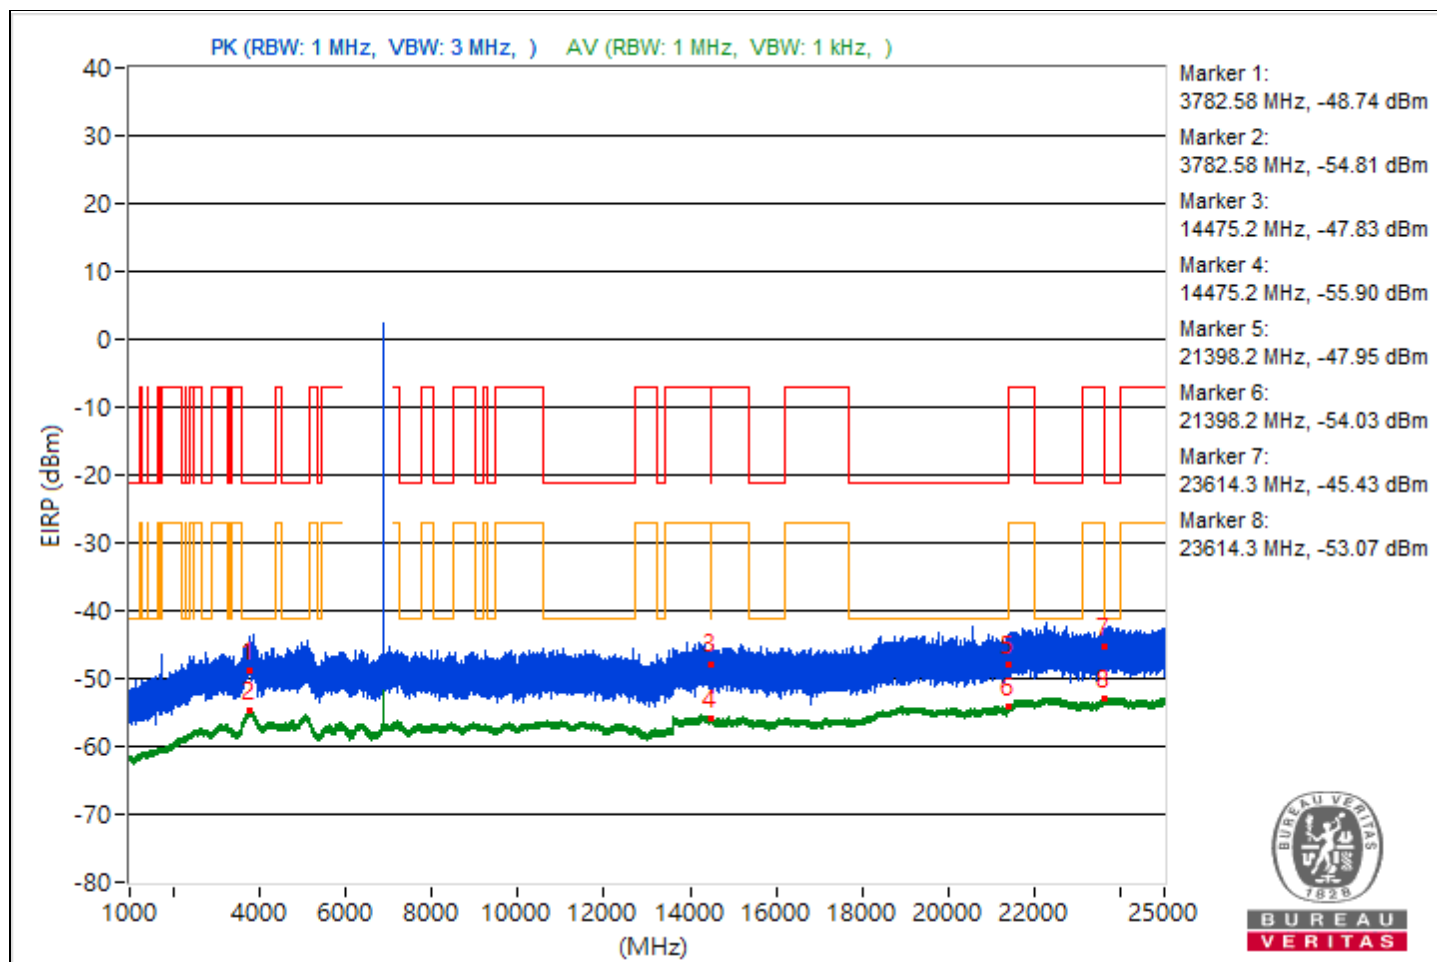


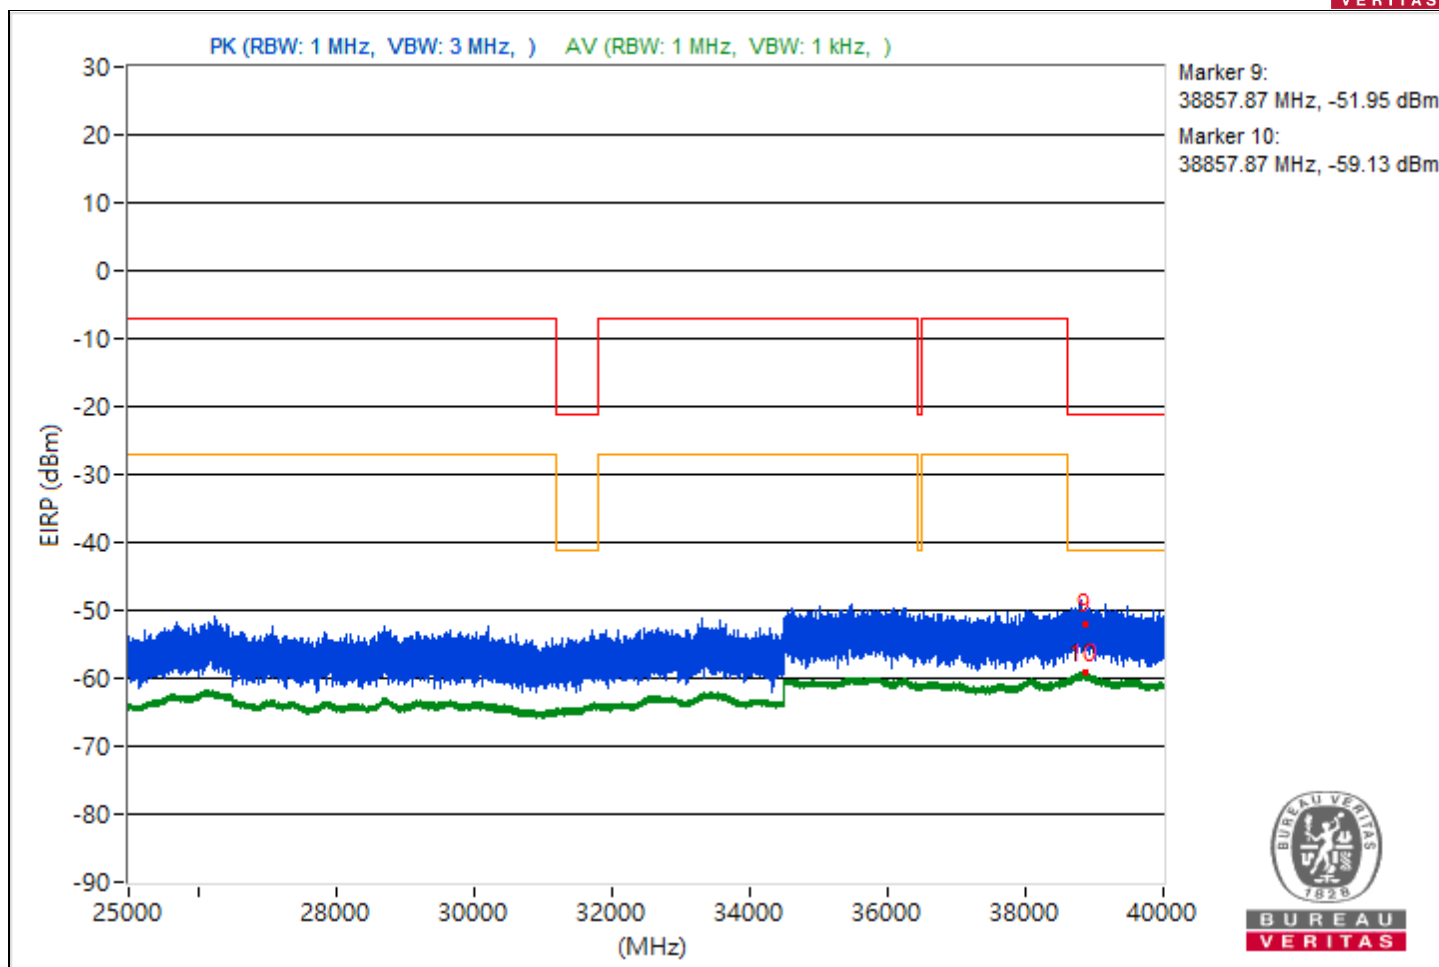


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3779.08	46.7 PK	74	-27.3	-59.51	-59.49	7.93	-48.56
2	3779.08	40.33 AV	54	-13.67	-66.14	-65.61	7.93	-54.93
3	14481.96	46.06 PK	74	-27.94	-59.08	-61.55	7.93	-49.2
4	14481.96	39.21 AV	54	-14.79	-67.33	-66.67	7.93	-56.05
5	21153.7	48.44 PK	74	-25.56	-57.42	-58.11	7.93	-46.82
6	21153.7	41.05 AV	54	-12.95	-64.75	-65.59	7.93	-54.21
7	22344.4	48.47 PK	74	-25.53	-57.46	-58.01	7.93	-46.79
8	22344.4	42.49 AV	54	-11.51	-63.89	-63.54	7.93	-52.77
9	38859.82	43.17 PK	74	-30.83	-63.18	-62.89	7.93	-52.09
10	38859.82	36.1 AV	54	-17.9	-70.26	-69.94	7.93	-59.16

Note: Margin value = Emission Level - Limit value

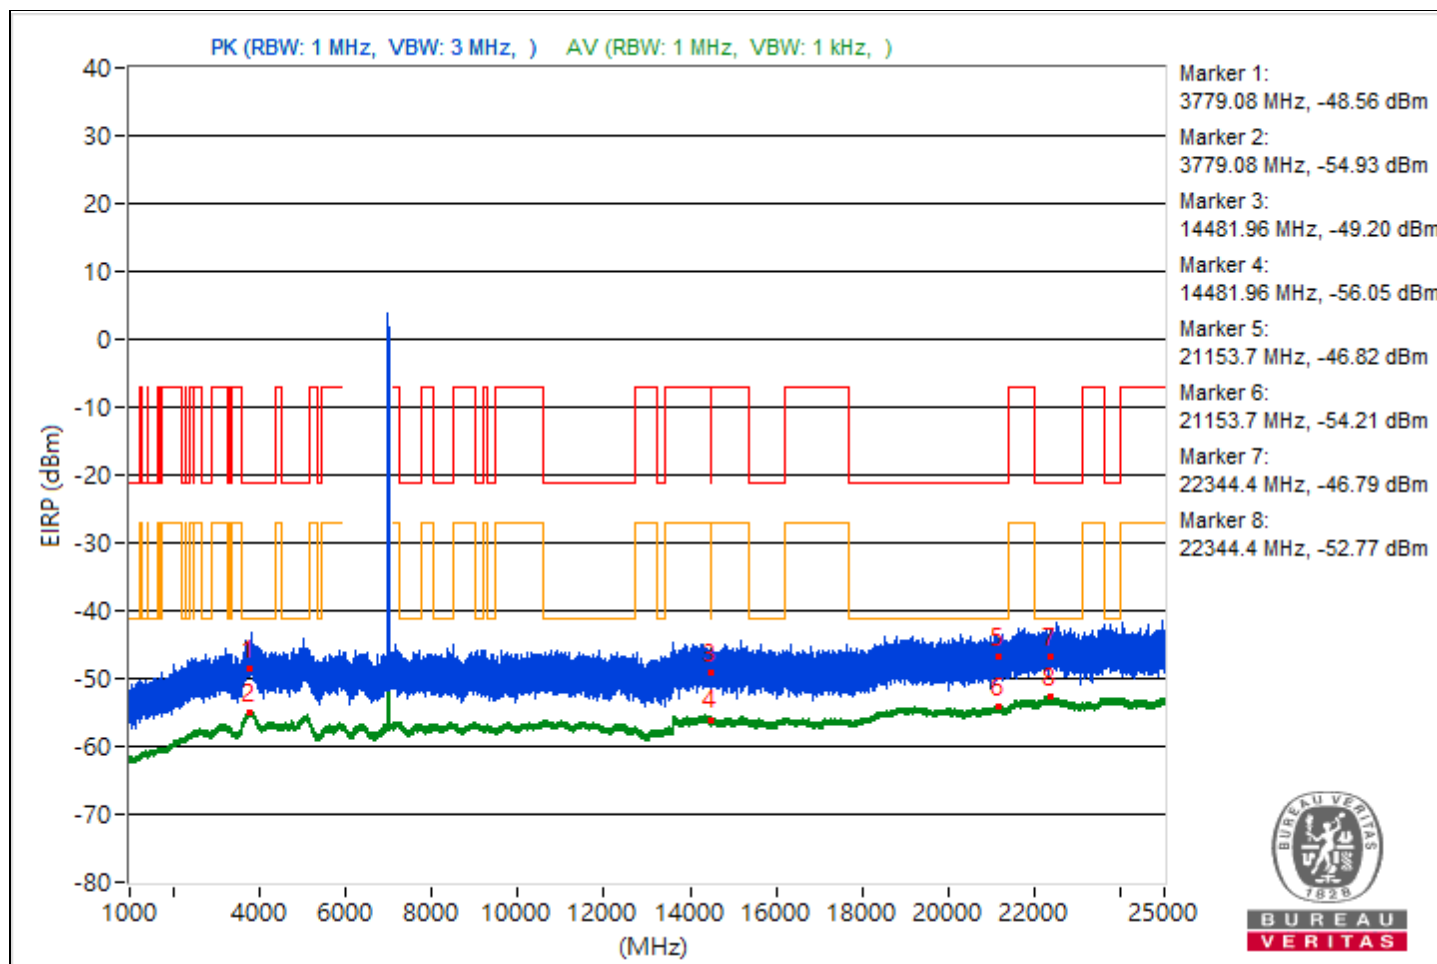


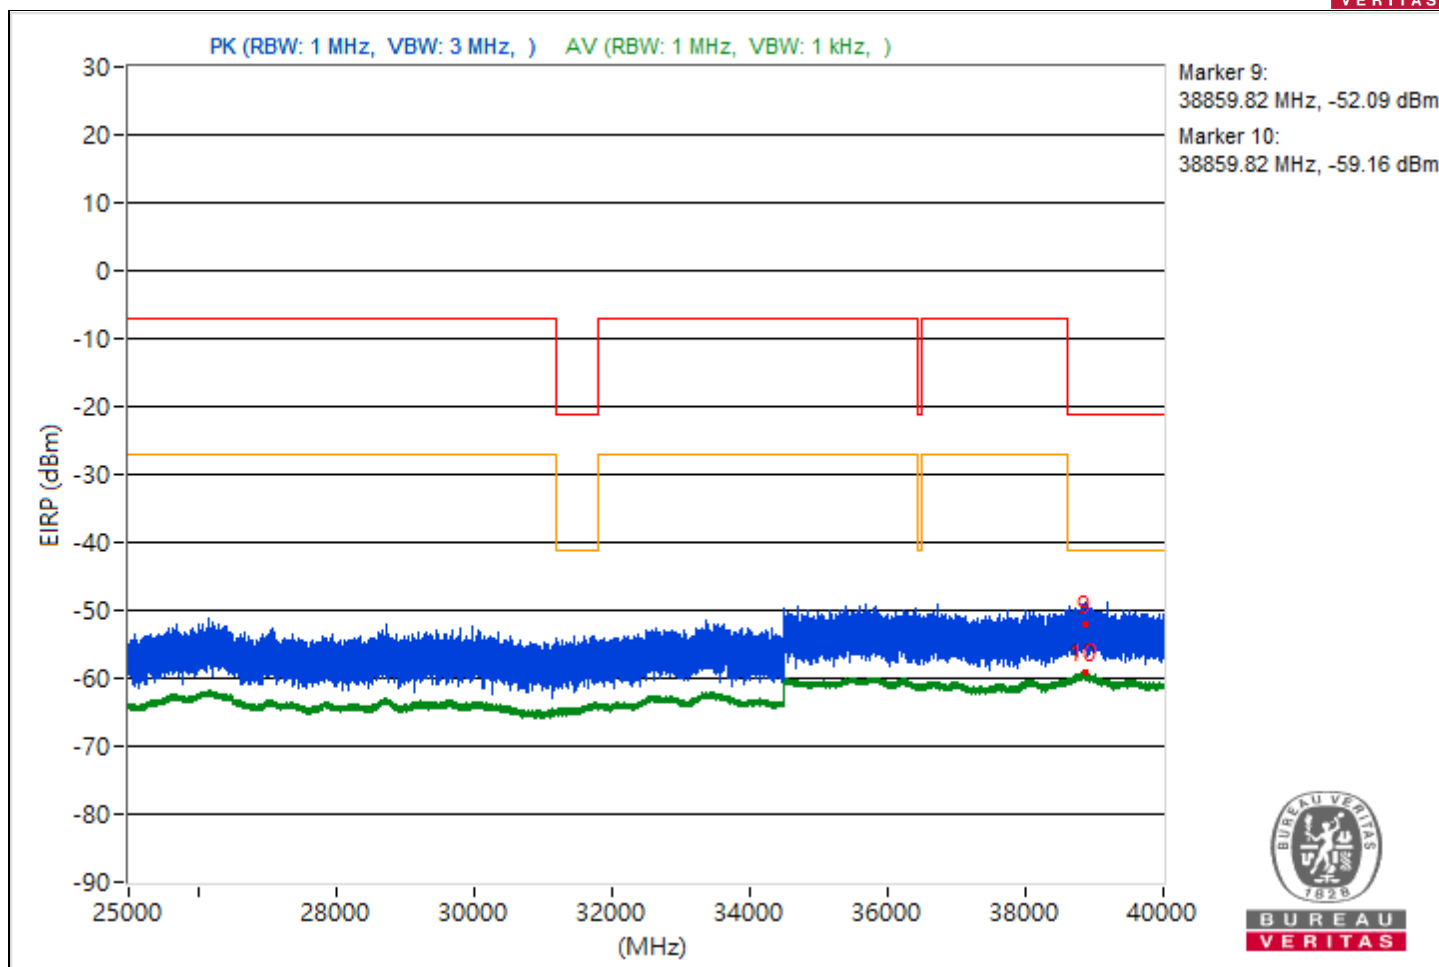


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3832.43	47.99 PK	74	-26.01	-59.19	-57.41	7.93	-47.27
2	3832.43	40.38 AV	54	-13.62	-66.01	-65.63	7.93	-54.88
3	14474.22	47.98 PK	74	-26.02	-59.02	-57.55	7.93	-47.28
4	14474.22	39.31 AV	54	-14.69	-66.57	-67.23	7.93	-55.95
5	21164.7	47.87 PK	74	-26.13	-58.14	-58.53	7.93	-47.39
6	21164.7	41.18 AV	54	-12.82	-65.26	-64.79	7.93	-54.08
7	23904.6	50.08 PK	74	-23.92	-58.45	-54.62	7.93	-45.18
8	23904.6	42.34 AV	54	-11.66	-63.53	-64.21	7.93	-52.92
9	38817.42	42.66 PK	74	-31.34	-62.6	-64.75	7.93	-52.6
10	38817.42	36.23 AV	54	-17.77	-70.2	-69.74	7.93	-59.03

Note: Margin value = Emission Level - Limit value

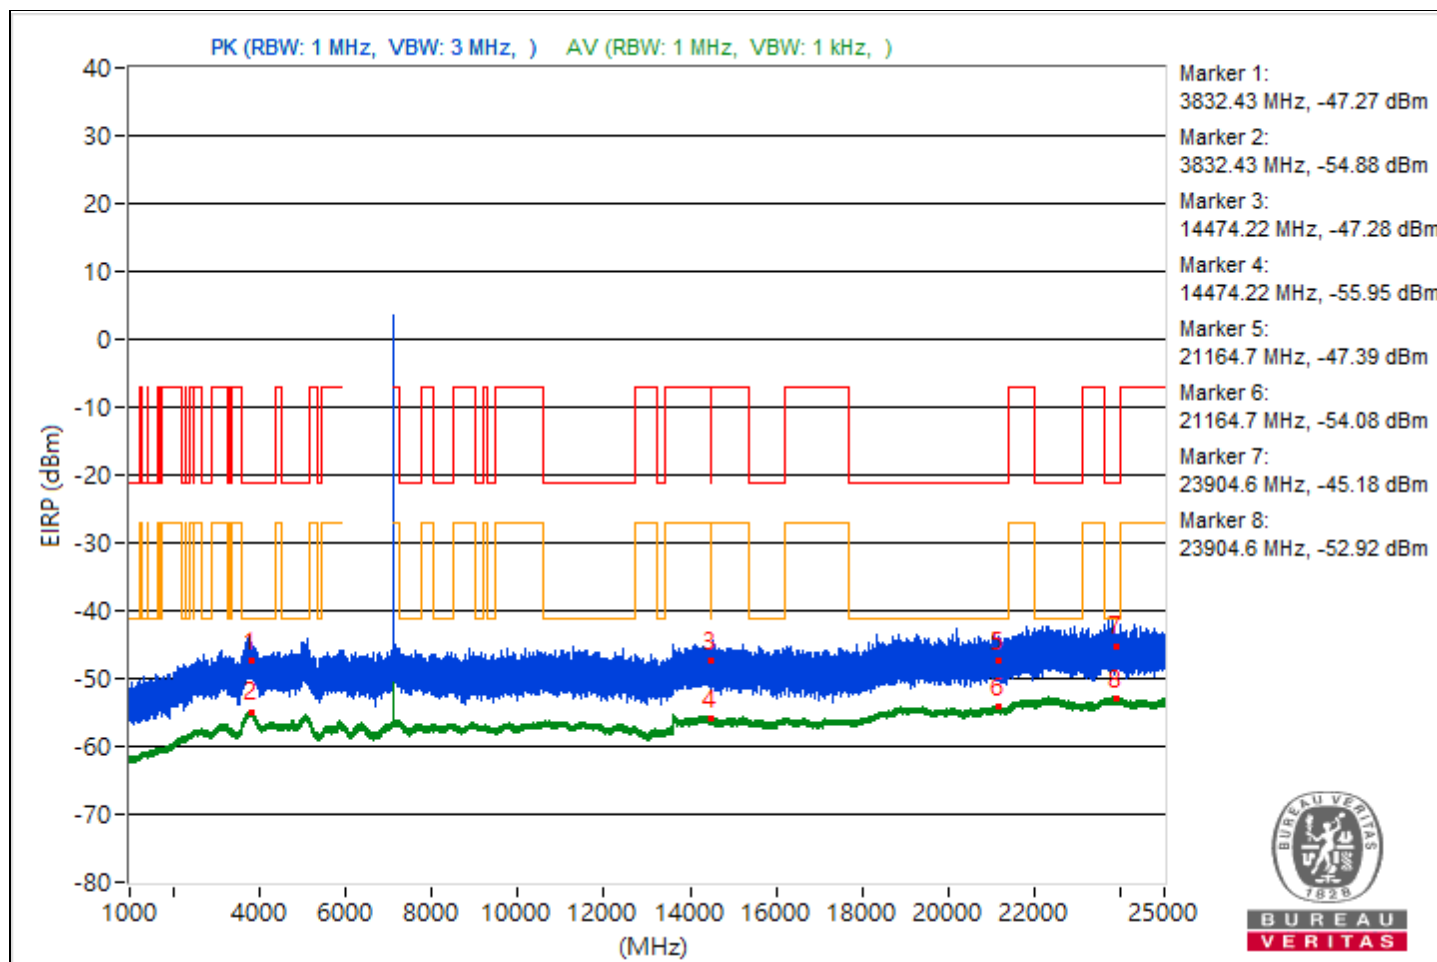

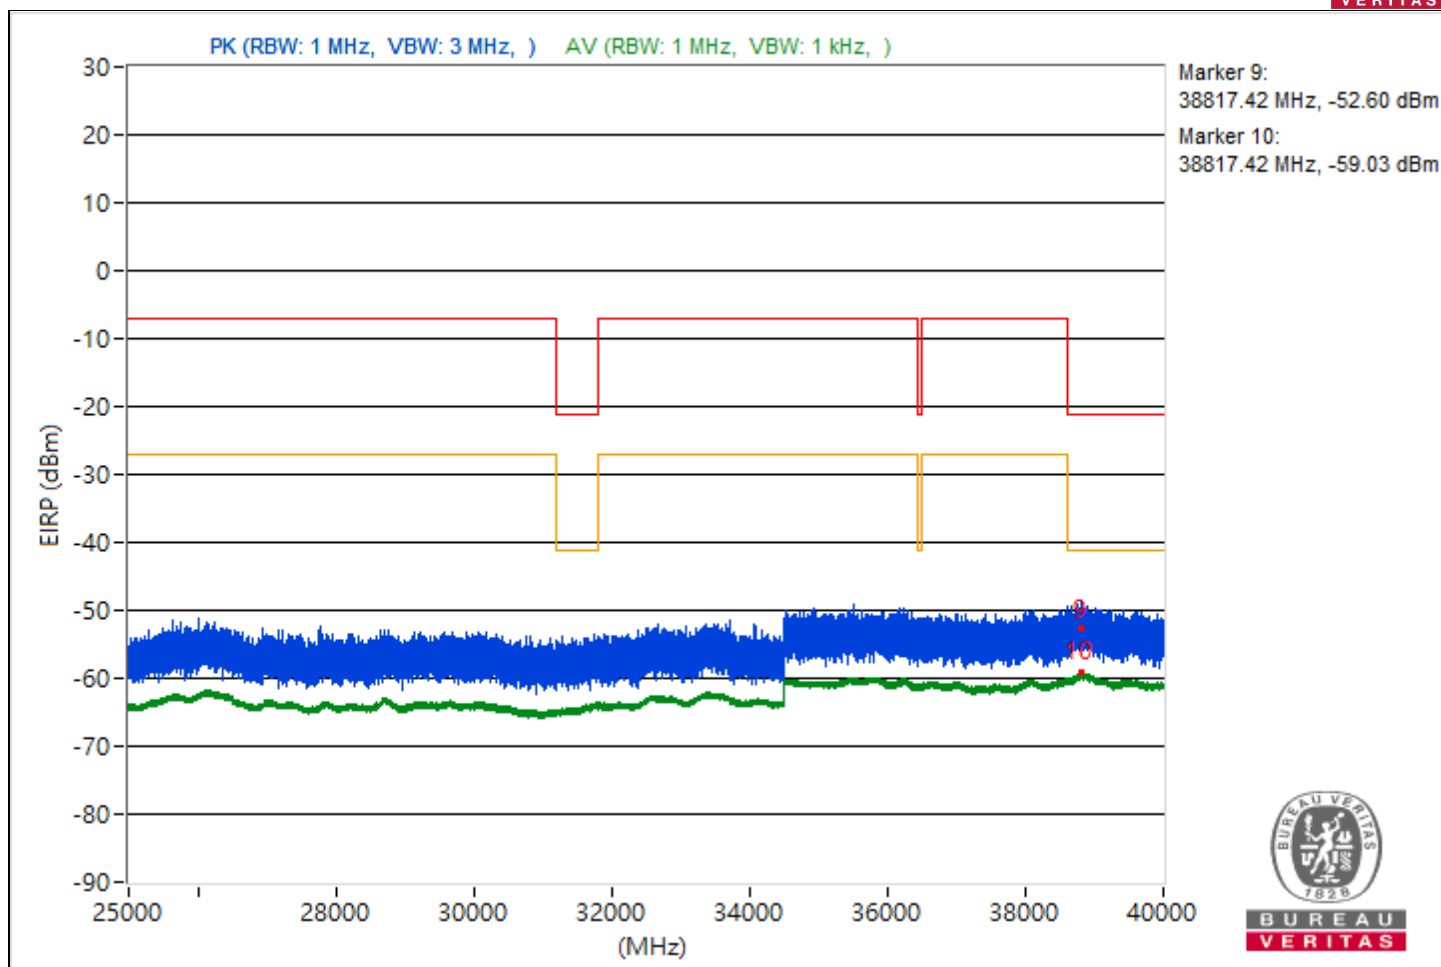



2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.4	45.28 PK	74	-28.72	-58.4	-57.47	4.92	-49.98
2	3808.4	37.37 AV	54	-16.63	-66.15	-65.51	4.92	-57.89
3	14483.64	44.19 PK	74	-29.81	-59.65	-58.44	4.92	-51.07
4	14483.64	36.35 AV	54	-17.65	-66.54	-67.17	4.92	-58.91
5	21173.8	47.18 PK	74	-26.82	-58.73	-54.35	4.92	-48.08
6	21173.8	38.27 AV	54	-15.73	-64.67	-65.19	4.92	-56.99
7	23810.9	46.19 PK	74	-27.81	-57.53	-56.52	4.92	-49.07
8	23810.9	39.58 AV	54	-14.42	-63.37	-63.85	4.92	-55.68
9	38792.89	40.28 PK	74	-33.72	-62.18	-63.8	4.92	-54.98
10	38792.89	33.2 AV	54	-20.8	-69.84	-70.15	4.92	-62.06

Note: Margin value = Emission Level - Limit value

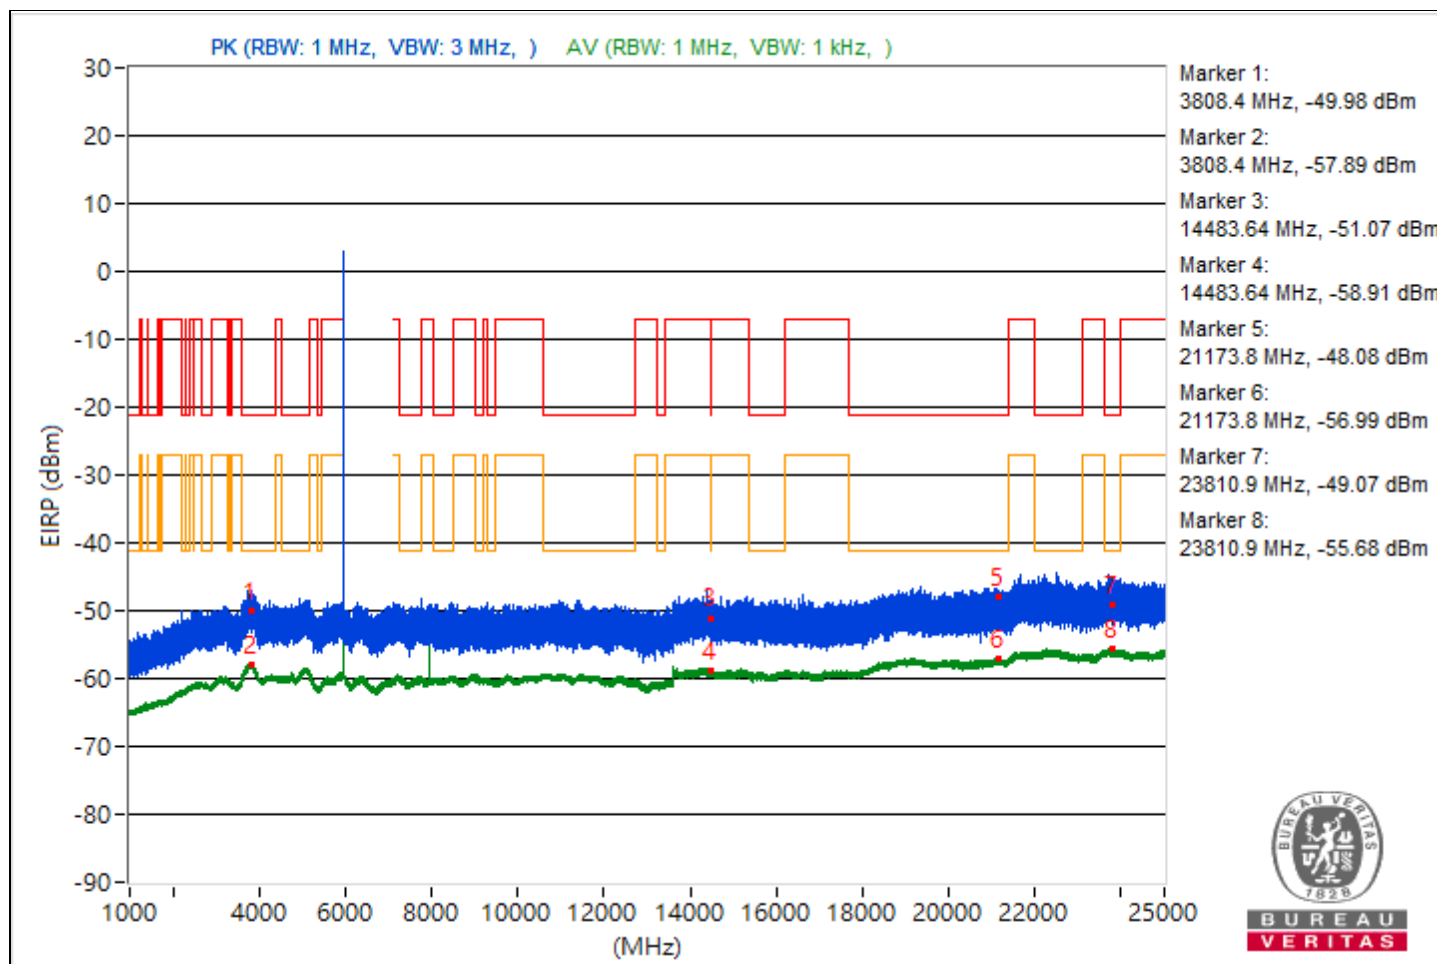


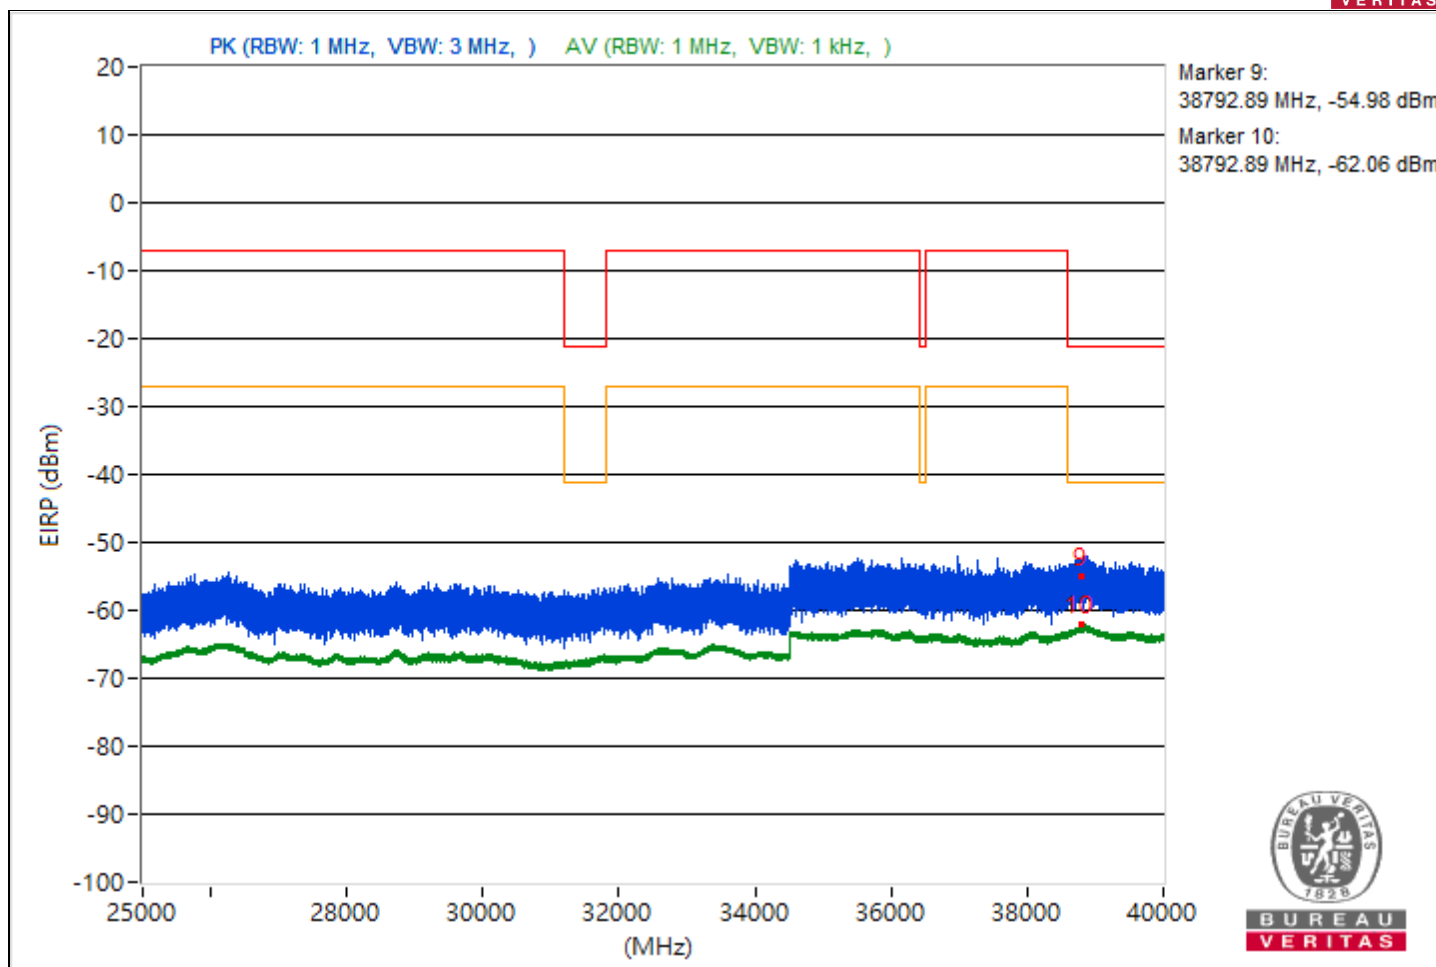


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.96	44.53 PK	74	-29.47	-58.85	-58.49	4.92	-50.73
2	3809.96	37.43 AV	54	-16.57	-65.41	-66.14	4.92	-57.83
3	8233.33	43.84 PK	74	-30.16	-57.74	-61.94	4.92	-51.42
4	8233.33	38.84 AV	54	-15.16	-62.29	-68.4	4.92	-56.42
5	21119.1	45.95 PK	74	-28.05	-55.72	-59.62	4.92	-49.31
6	21119.1	38.07 AV	54	-15.93	-64.93	-65.32	4.92	-57.19
7	23676.8	47.42 PK	74	-26.58	-54.61	-57.34	4.92	-47.84
8	23676.8	39.62 AV	54	-14.38	-63.9	-63.27	4.92	-55.64
9	38823.02	37.72 PK	74	-36.28	-64.55	-66.63	4.92	-57.54
10	38823.02	32.9 AV	54	-21.1	-69.77	-70.88	4.92	-62.36

Note: Margin value = Emission Level - Limit value

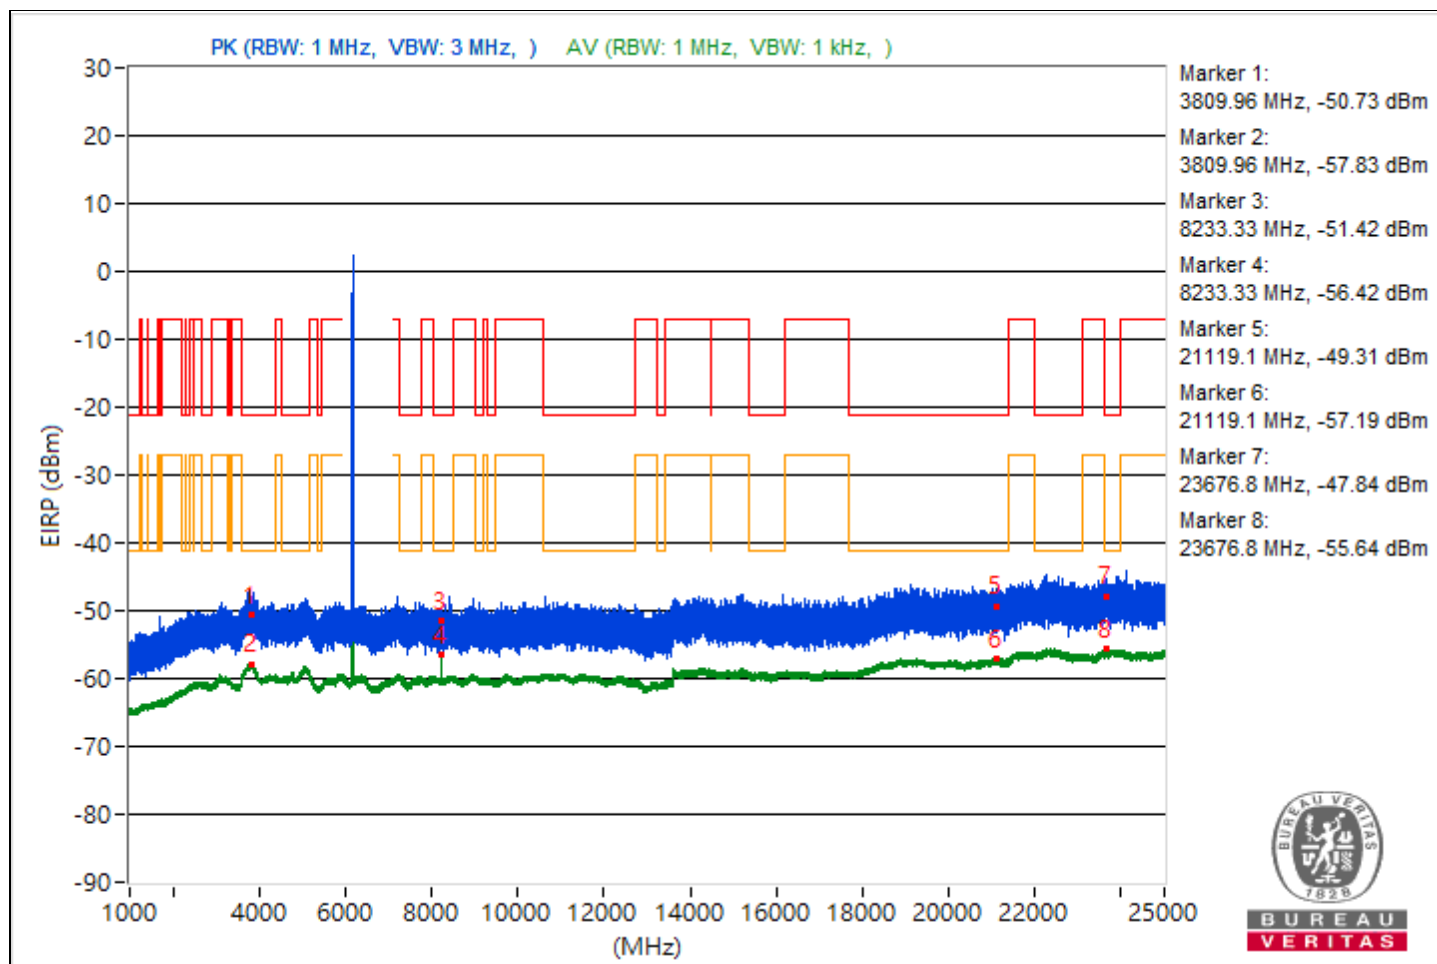


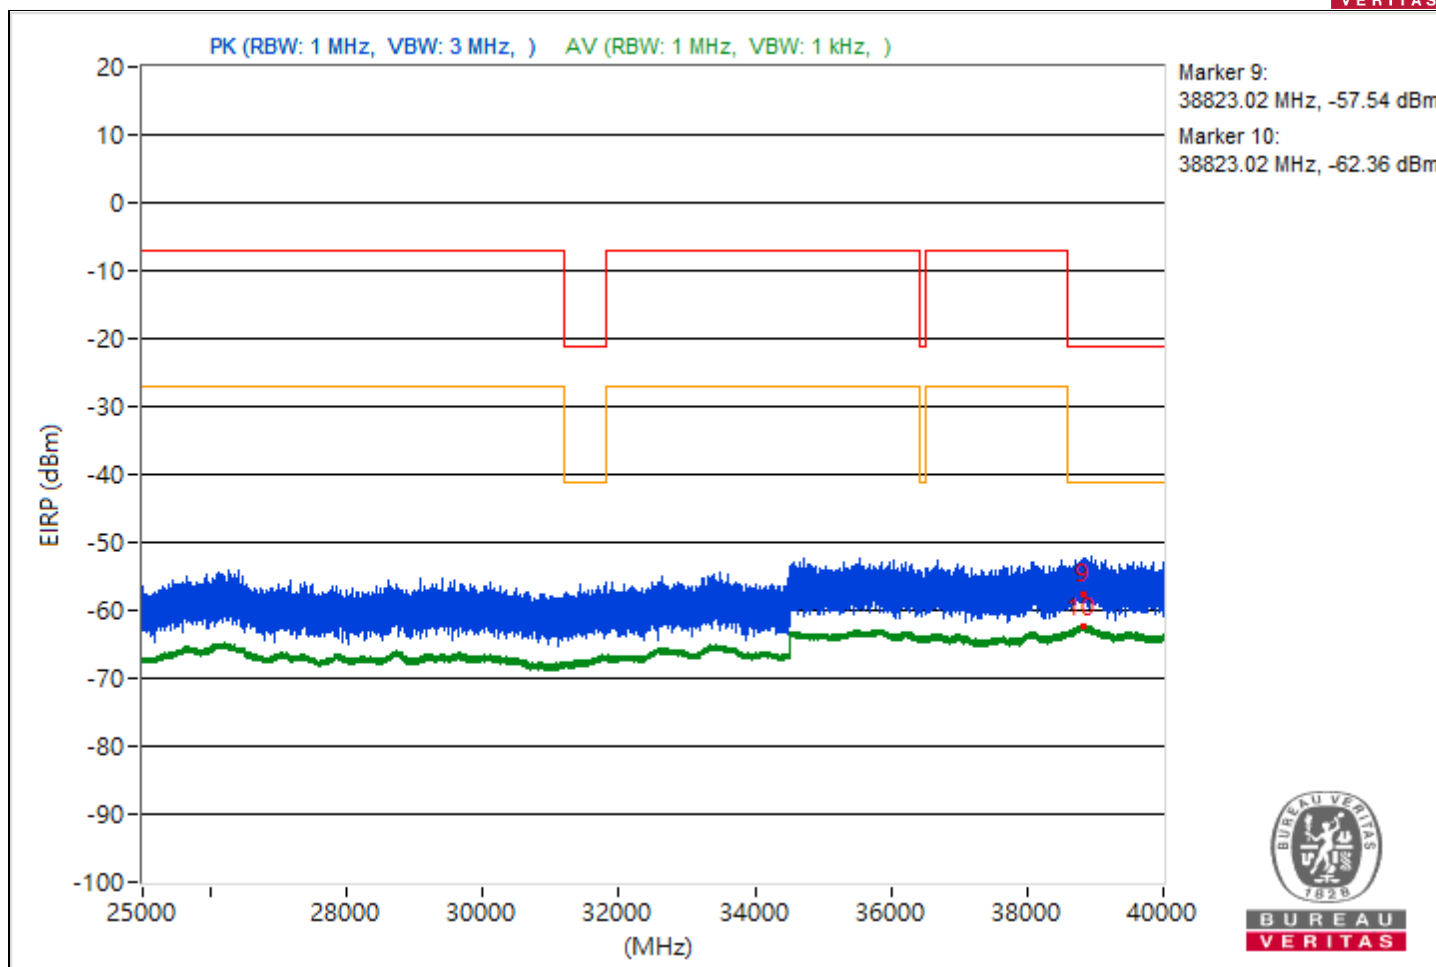


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.73	45.36 PK	74	-28.64	-56.92	-58.96	4.92	-49.9
2	3810.73	37.45 AV	54	-16.55	-65.54	-65.94	4.92	-57.81
3	14492.36	44.19 PK	74	-29.81	-58.9	-59.11	4.92	-51.07
4	14492.36	36.27 AV	54	-17.73	-67.21	-66.65	4.92	-58.99
5	21160.1	44.83 PK	74	-29.17	-59.21	-57.66	4.92	-50.43
6	21160.1	38.22 AV	54	-15.78	-65.17	-64.78	4.92	-57.04
7	23767.5	45.78 PK	74	-28.22	-56.71	-58.26	4.92	-49.48
8	23767.5	39.58 AV	54	-14.42	-63.87	-63.38	4.92	-55.68
9	38861.42	39.88 PK	74	-34.12	-64.9	-62.15	4.92	-55.38
10	38861.42	33.02 AV	54	-20.98	-70.55	-69.82	4.92	-62.24

Note: Margin value = Emission Level - Limit value

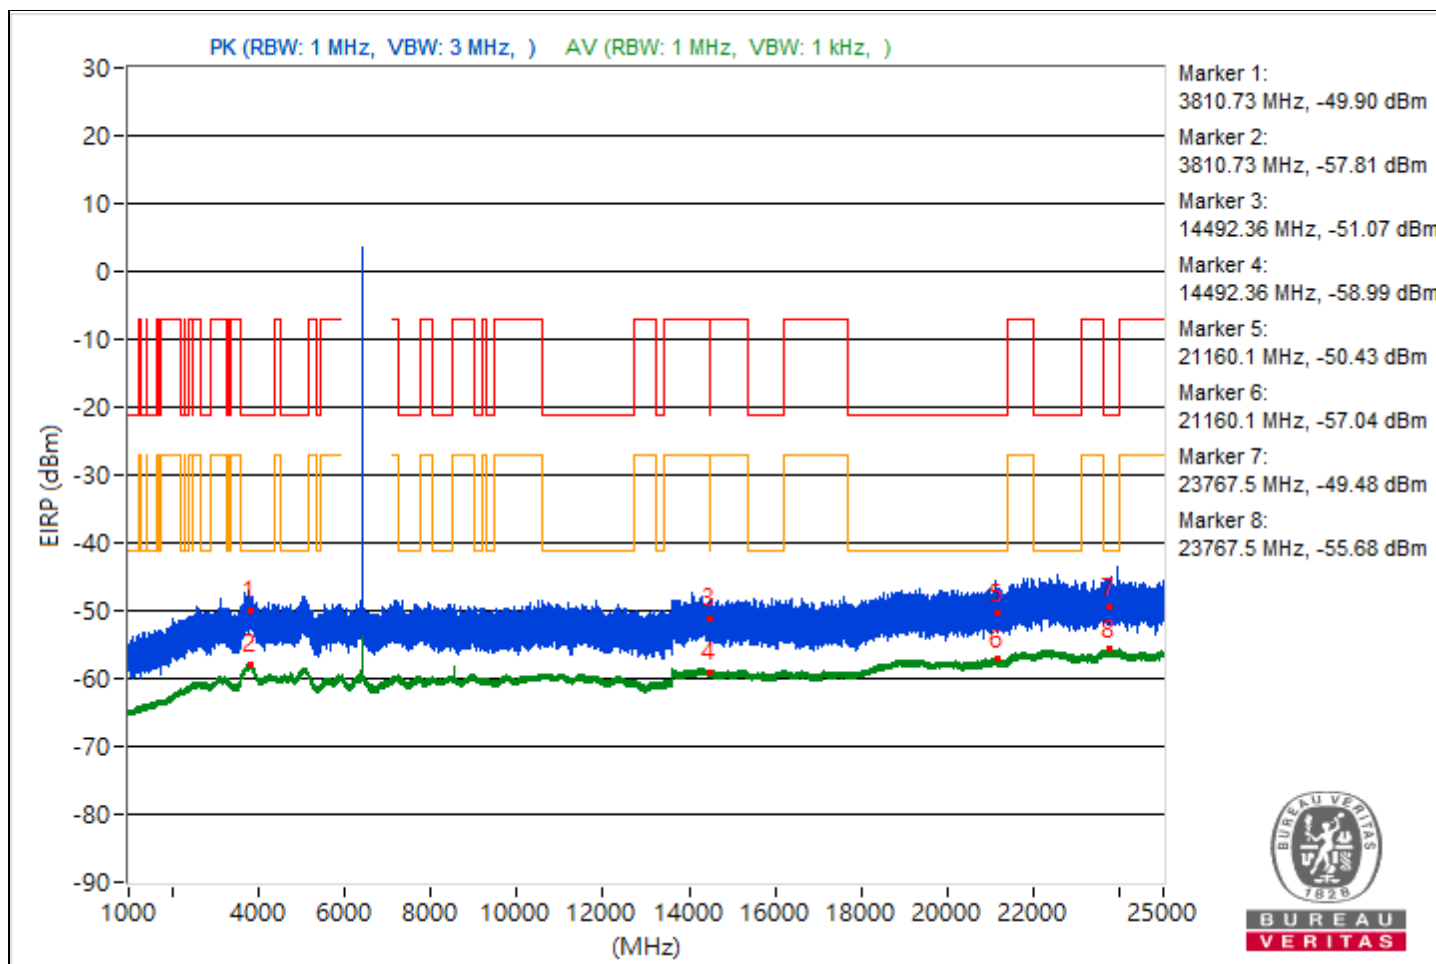


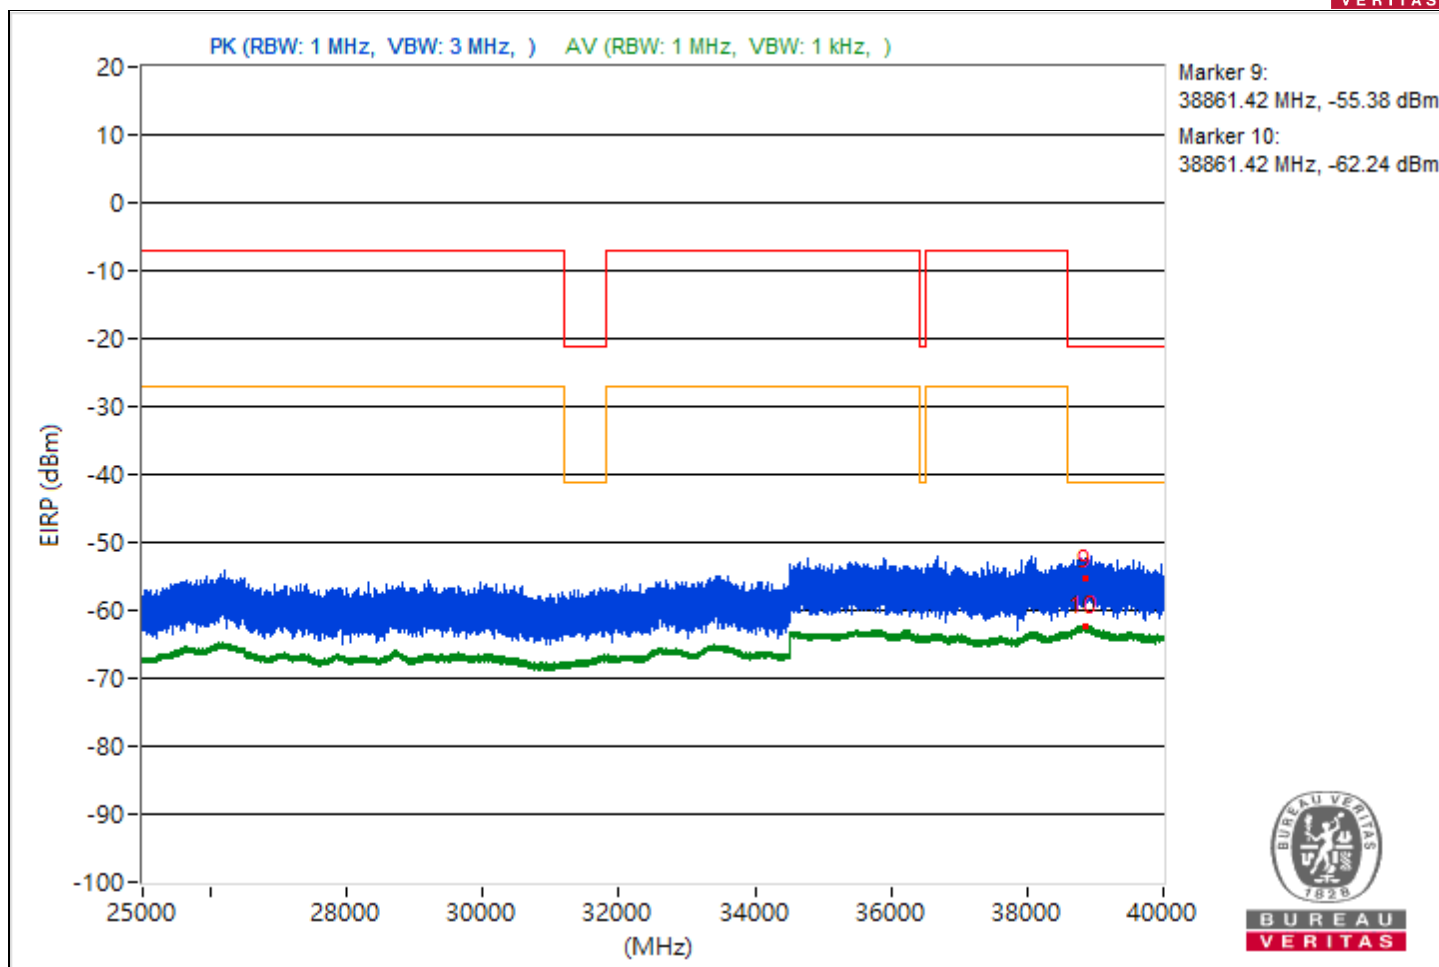


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.08	44.47 PK	74	-29.53	-58.33	-59.16	4.92	-50.79
2	3814.08	37.53 AV	54	-16.47	-65.77	-65.56	4.92	-57.73
3	14487.56	42.85 PK	74	-31.15	-59.91	-60.83	4.92	-52.41
4	14487.56	36.42 AV	54	-17.58	-66.66	-66.88	4.92	-58.84
5	21153.3	47.46 PK	74	-26.54	-55.13	-56.42	4.92	-47.8
6	21153.3	38.06 AV	54	-15.94	-65.48	-64.8	4.92	-57.2
7	23858.9	46.03 PK	74	-27.97	-57.65	-56.72	4.92	-49.23
8	23858.9	39.42 AV	54	-14.58	-63.56	-64	4.92	-55.84
9	38813.6	39.86 PK	74	-34.14	-62.12	-65.03	4.92	-55.4
10	38813.6	32.96 AV	54	-21.04	-69.79	-70.73	4.92	-62.3

Note: Margin value = Emission Level - Limit value

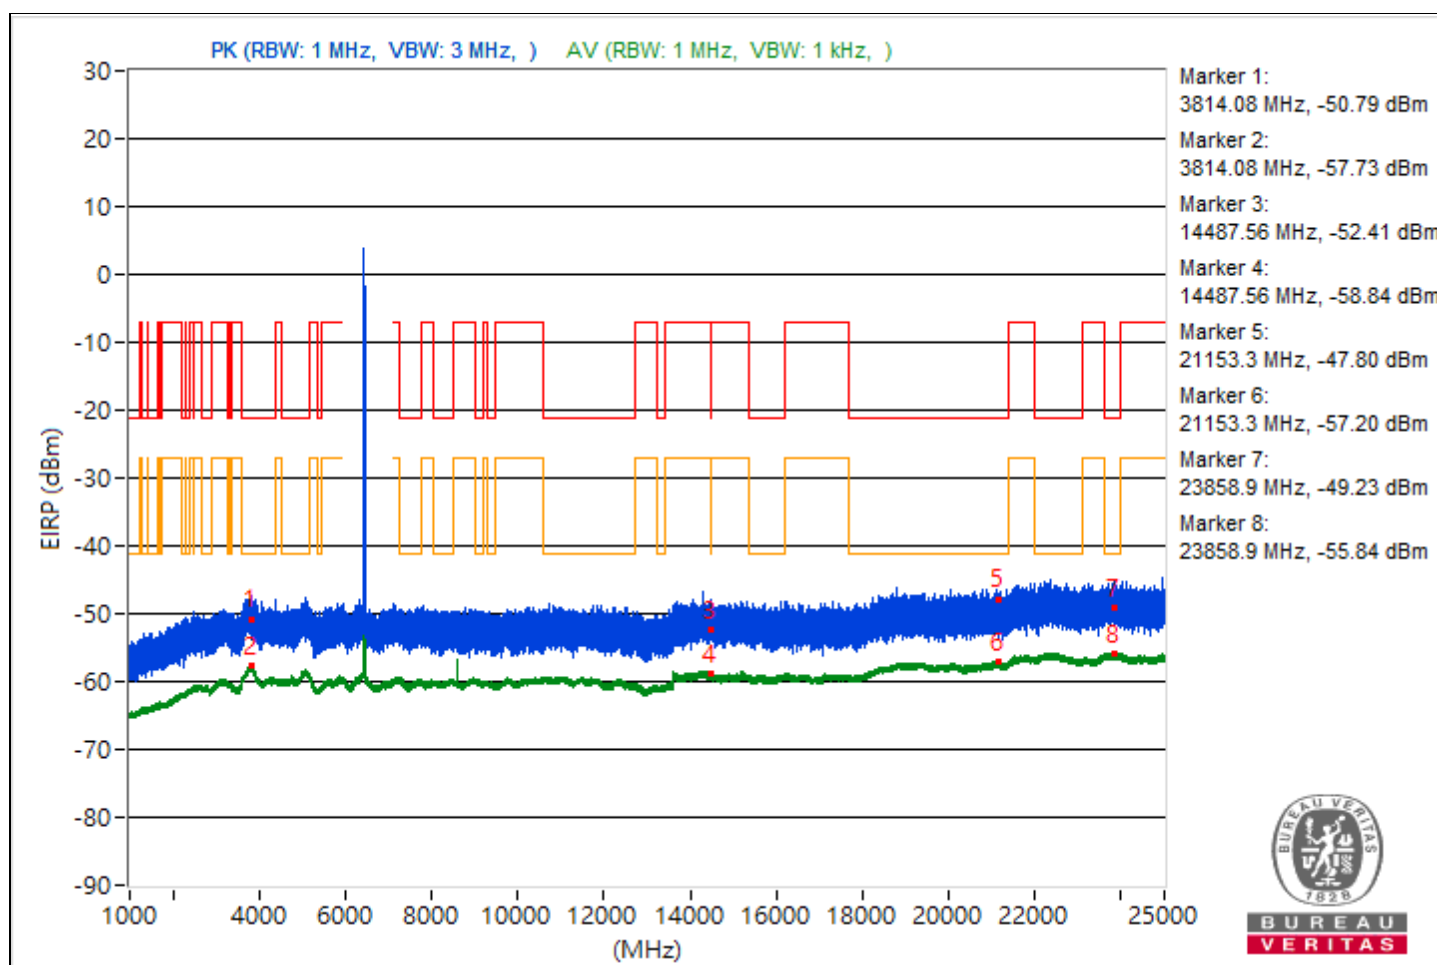


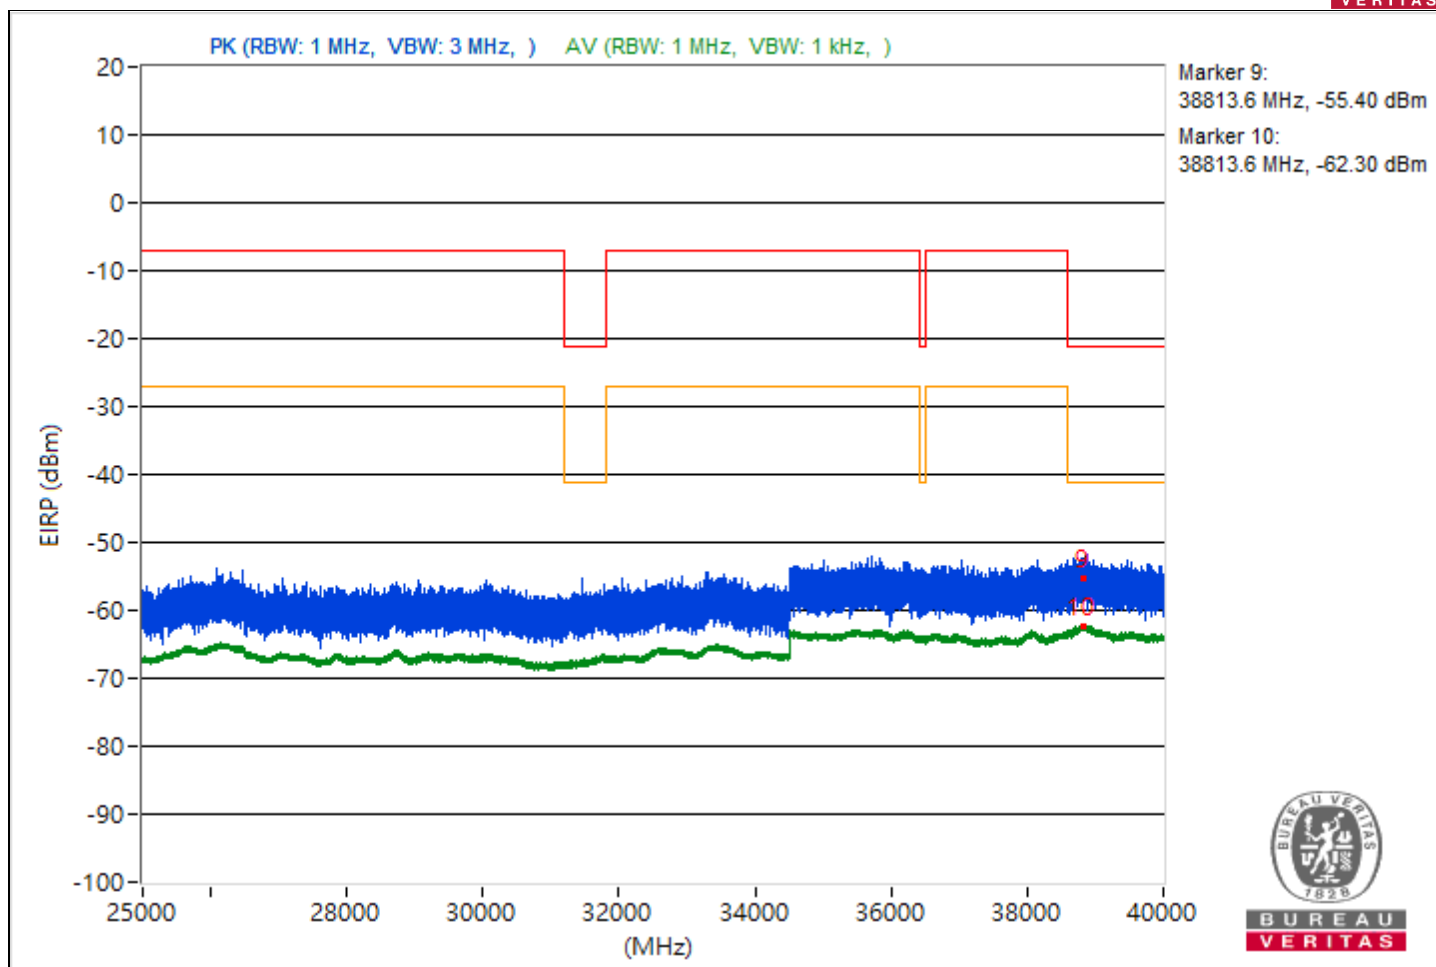


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.83	45.62 PK	74	-28.38	-58.75	-56.65	4.92	-49.64
2	3805.83	37.39 AV	54	-16.61	-65.55	-66.07	4.92	-57.87
3	14496.71	43.17 PK	74	-30.83	-60.98	-59.24	4.92	-52.09
4	14496.71	36.47 AV	54	-17.53	-66.42	-67.03	4.92	-58.79
5	21105.6	45.73 PK	74	-28.27	-56.45	-58.79	4.92	-49.53
6	21105.6	37.98 AV	54	-16.02	-65.61	-64.84	4.92	-57.28
7	22226.9	45.82 PK	74	-28.18	-56.38	-58.66	4.92	-49.44
8	22226.9	39.32 AV	54	-14.68	-63.53	-64.23	4.92	-55.94
9	38869.69	39.84 PK	74	-34.16	-63.42	-63.27	4.92	-55.42
10	38869.69	33.12 AV	54	-20.88	-69.68	-70.51	4.92	-62.14

Note: Margin value = Emission Level - Limit value

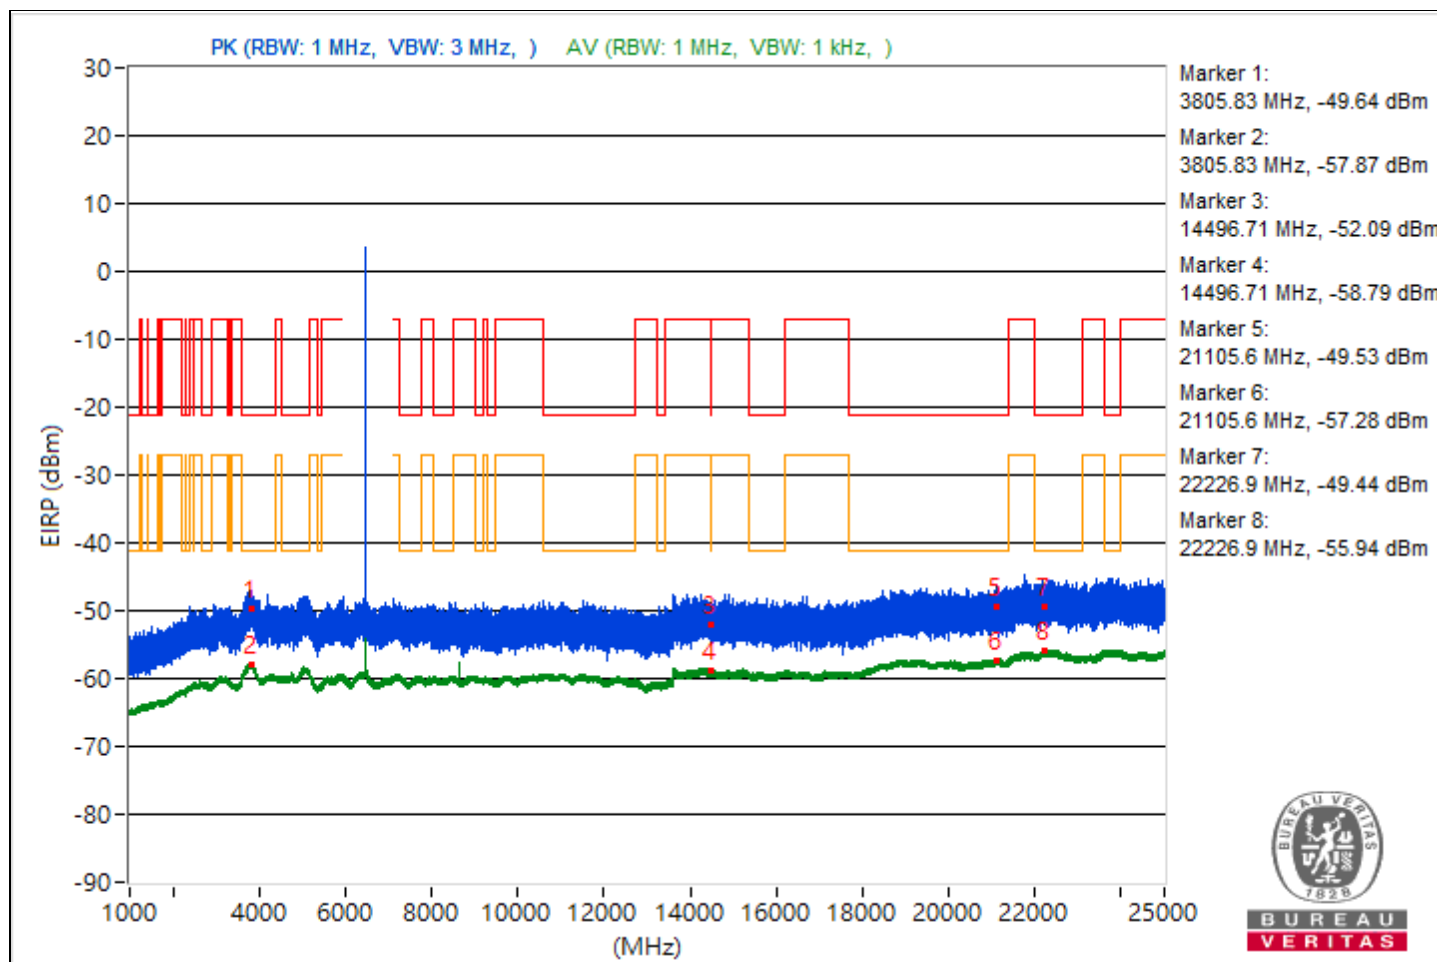


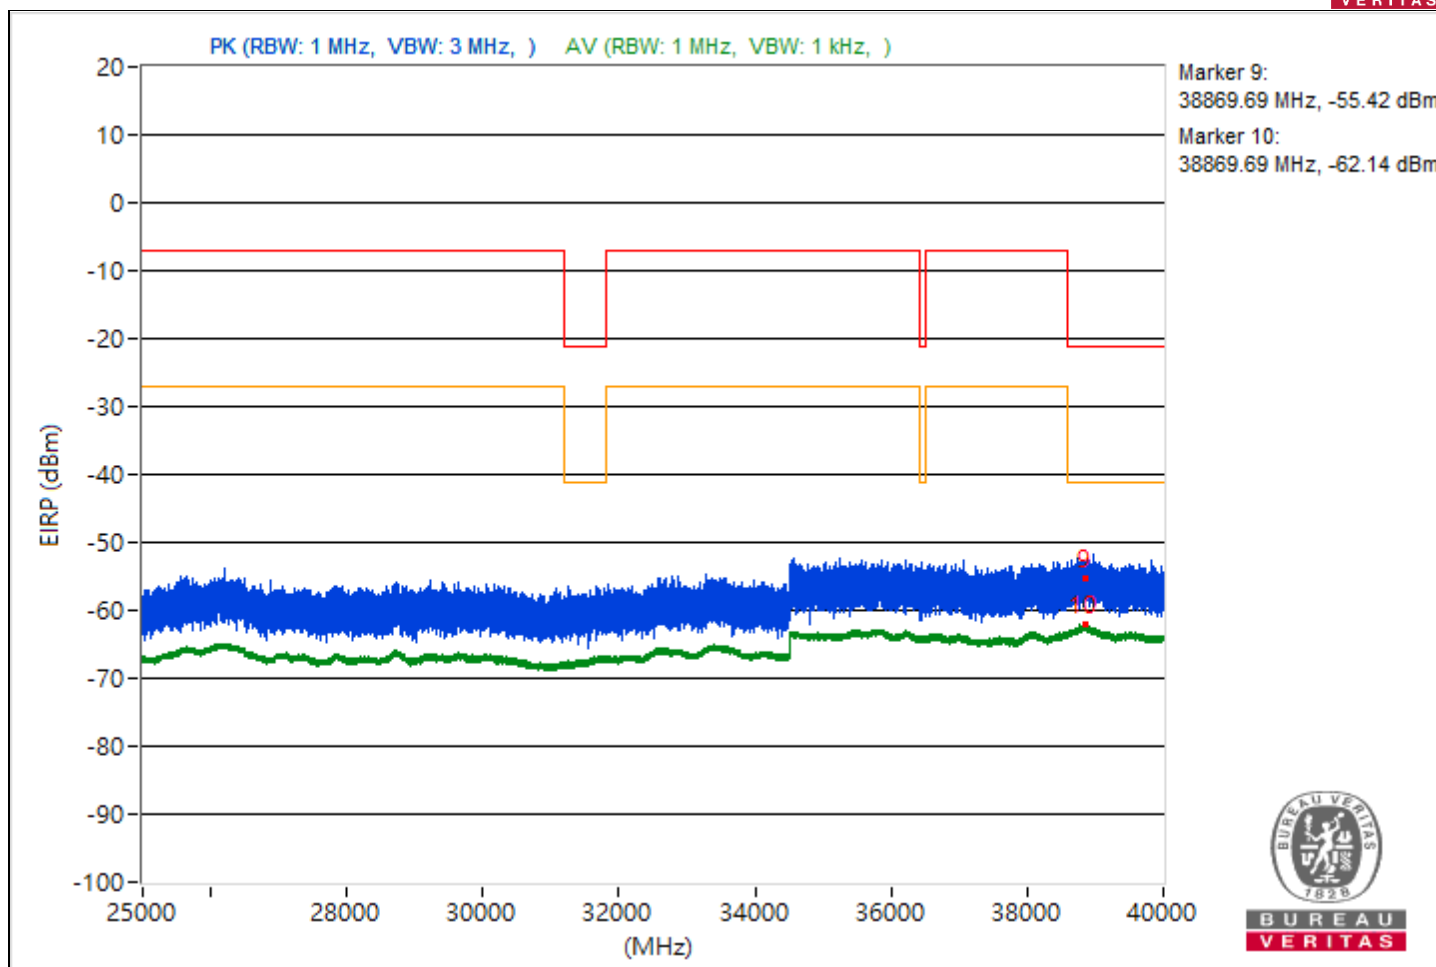


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.51	42.81 PK	74	-31.19	-60.88	-59.93	4.92	-52.45
2	3825.51	37.46 AV	54	-16.54	-65.58	-65.9	4.92	-57.8
3	14482.76	44.5 PK	74	-29.5	-59.6	-57.95	4.92	-50.76
4	14482.76	36.37 AV	54	-17.63	-66.57	-67.09	4.92	-58.89
5	21121.6	44.23 PK	74	-29.77	-57.63	-60.9	4.92	-51.03
6	21121.6	38.12 AV	54	-15.88	-65.35	-64.82	4.92	-57.14
7	23644.7	46.46 PK	74	-27.54	-56.71	-56.74	4.92	-48.8
8	23644.7	39.36 AV	54	-14.64	-64.16	-63.51	4.92	-55.9
9	38811.29	40.6 PK	74	-33.4	-61.12	-64.82	4.92	-54.66
10	38811.29	32.98 AV	54	-21.02	-70.68	-69.8	4.92	-62.28

Note: Margin value = Emission Level - Limit value

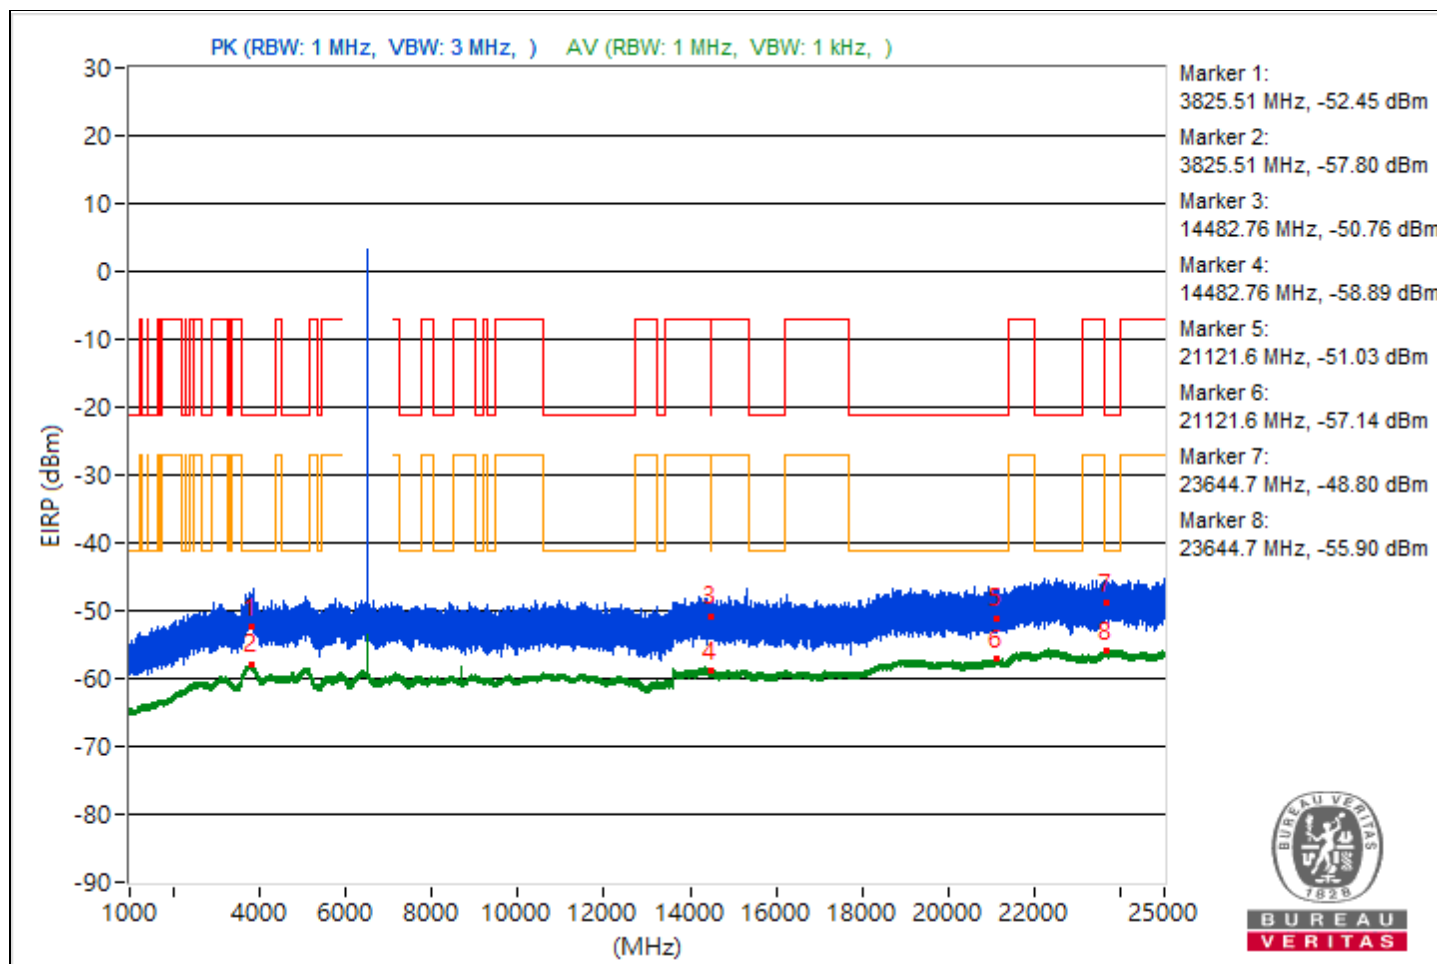


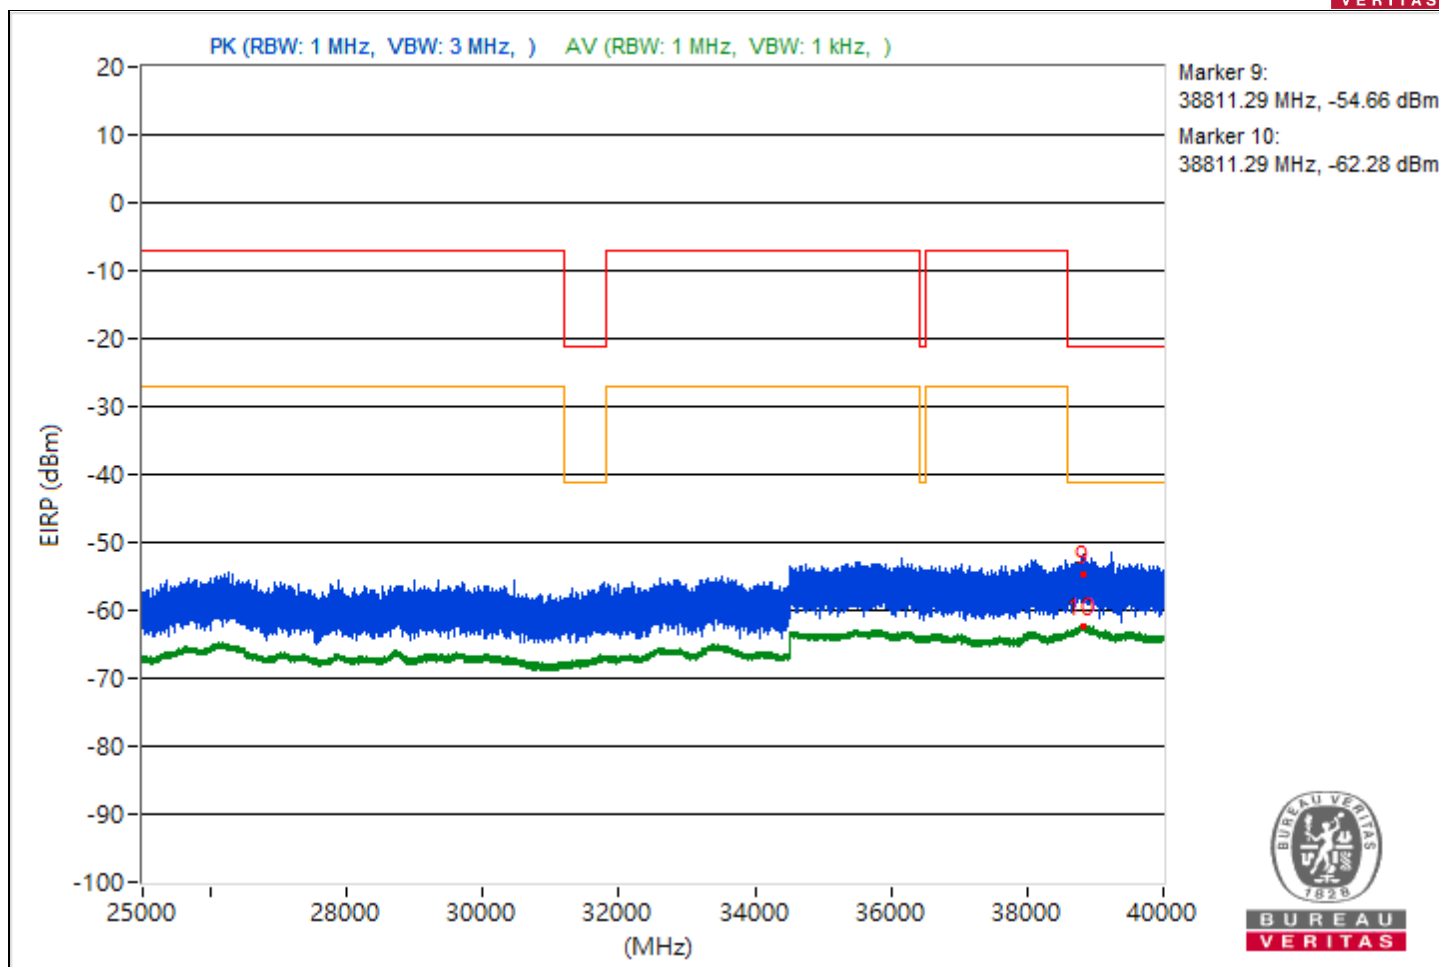


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.77	44.87 PK	74	-29.13	-60.53	-56.86	4.92	-50.39
2	3806.77	37.57 AV	54	-16.43	-65.37	-65.88	4.92	-57.69
3	14476.71	43.49 PK	74	-30.51	-59.24	-60.21	4.92	-51.77
4	14476.71	36.43 AV	54	-17.57	-66.54	-66.99	4.92	-58.83
5	21069.1	44.16 PK	74	-29.84	-60.42	-57.98	4.92	-51.1
6	21069.1	38.02 AV	54	-15.98	-65.51	-64.85	4.92	-57.24
7	23628.1	46.55 PK	74	-27.45	-56.72	-56.56	4.92	-48.71
8	23628.1	39.49 AV	54	-14.51	-63.35	-64.07	4.92	-55.77
9	38801.24	38.99 PK	74	-35.01	-63.8	-64.64	4.92	-56.27
10	38801.24	32.89 AV	54	-21.11	-69.79	-70.87	4.92	-62.37

Note: Margin value = Emission Level - Limit value

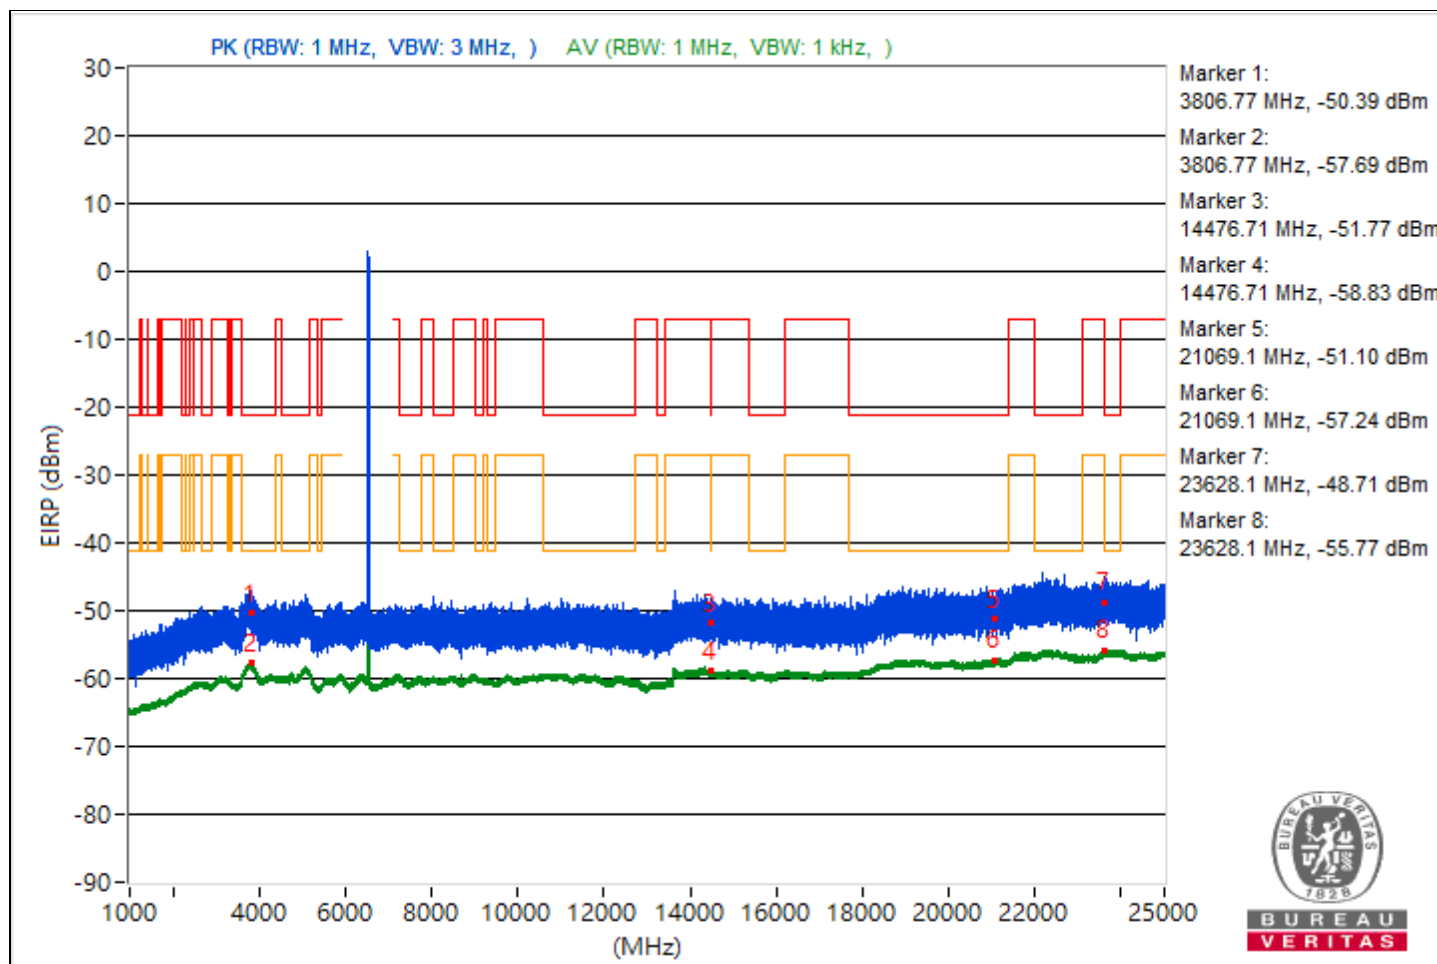


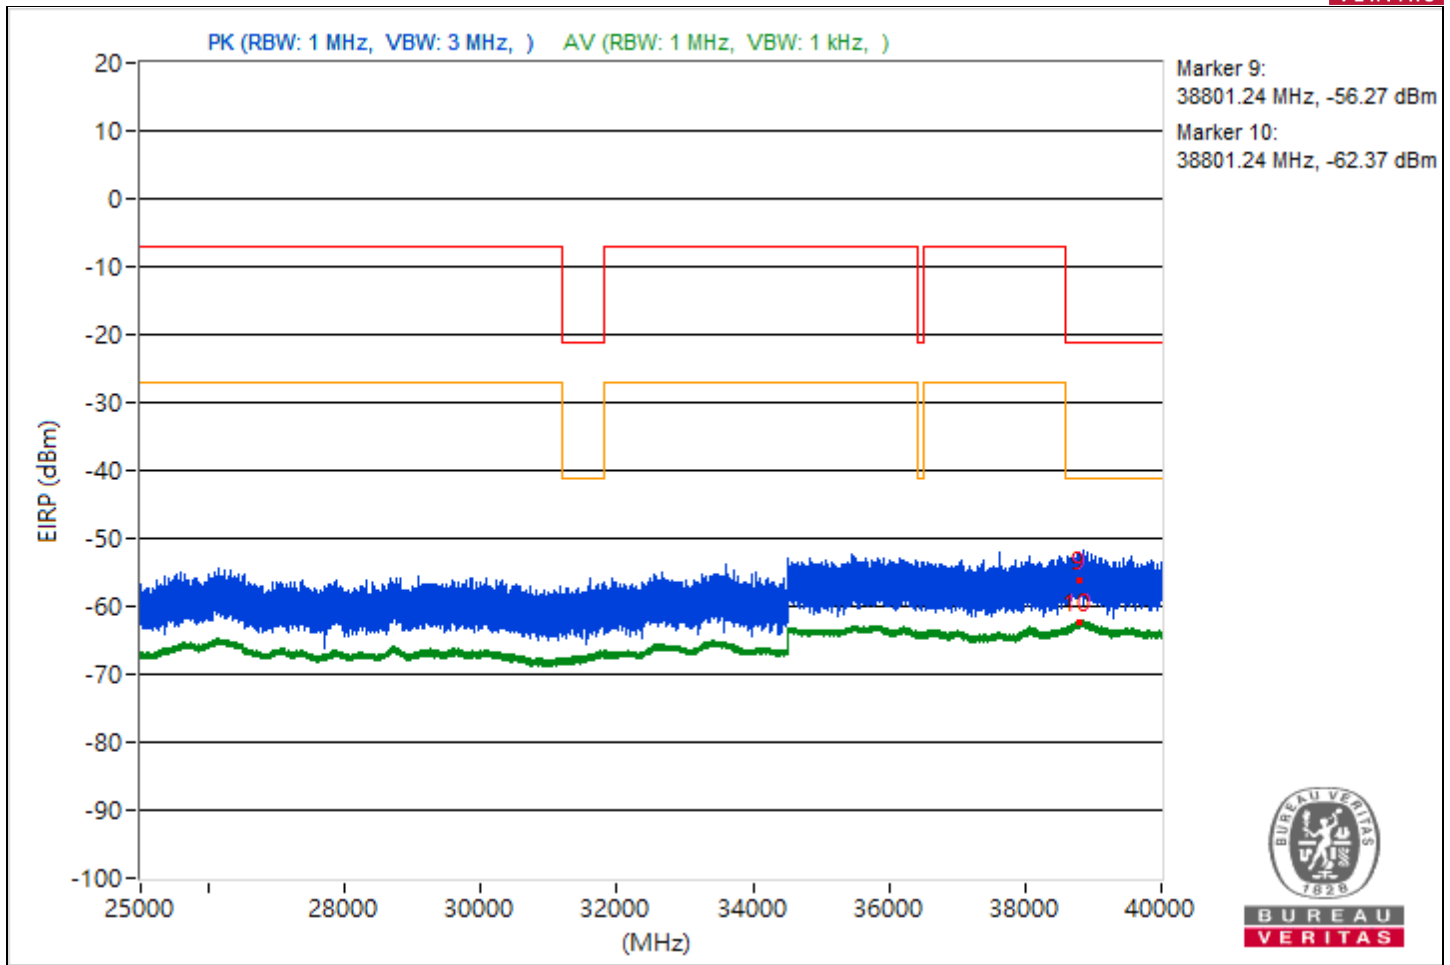


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3824.89	45.08 PK	74	-28.92	-57.5	-58.81	4.92	-50.18
2	3824.89	37.27 AV	54	-16.73	-65.4	-66.52	4.92	-57.99
3	14491.38	45.58 PK	74	-28.42	-60.64	-55.85	4.92	-49.68
4	14491.38	36.35 AV	54	-17.65	-66.55	-67.16	4.92	-58.91
5	21117.6	44.88 PK	74	-29.12	-57.78	-58.92	4.92	-50.38
6	21117.6	38.18 AV	54	-15.82	-65.19	-64.84	4.92	-57.08
7	22357	45.23 PK	74	-28.77	-57.49	-58.49	4.92	-50.03
8	22357	39.29 AV	54	-14.71	-63.49	-64.35	4.92	-55.97
9	38860.18	39.91 PK	74	-34.09	-64.22	-62.5	4.92	-55.35
10	38860.18	32.98 AV	54	-21.02	-70.53	-69.91	4.92	-62.28

Note: Margin value = Emission Level - Limit value

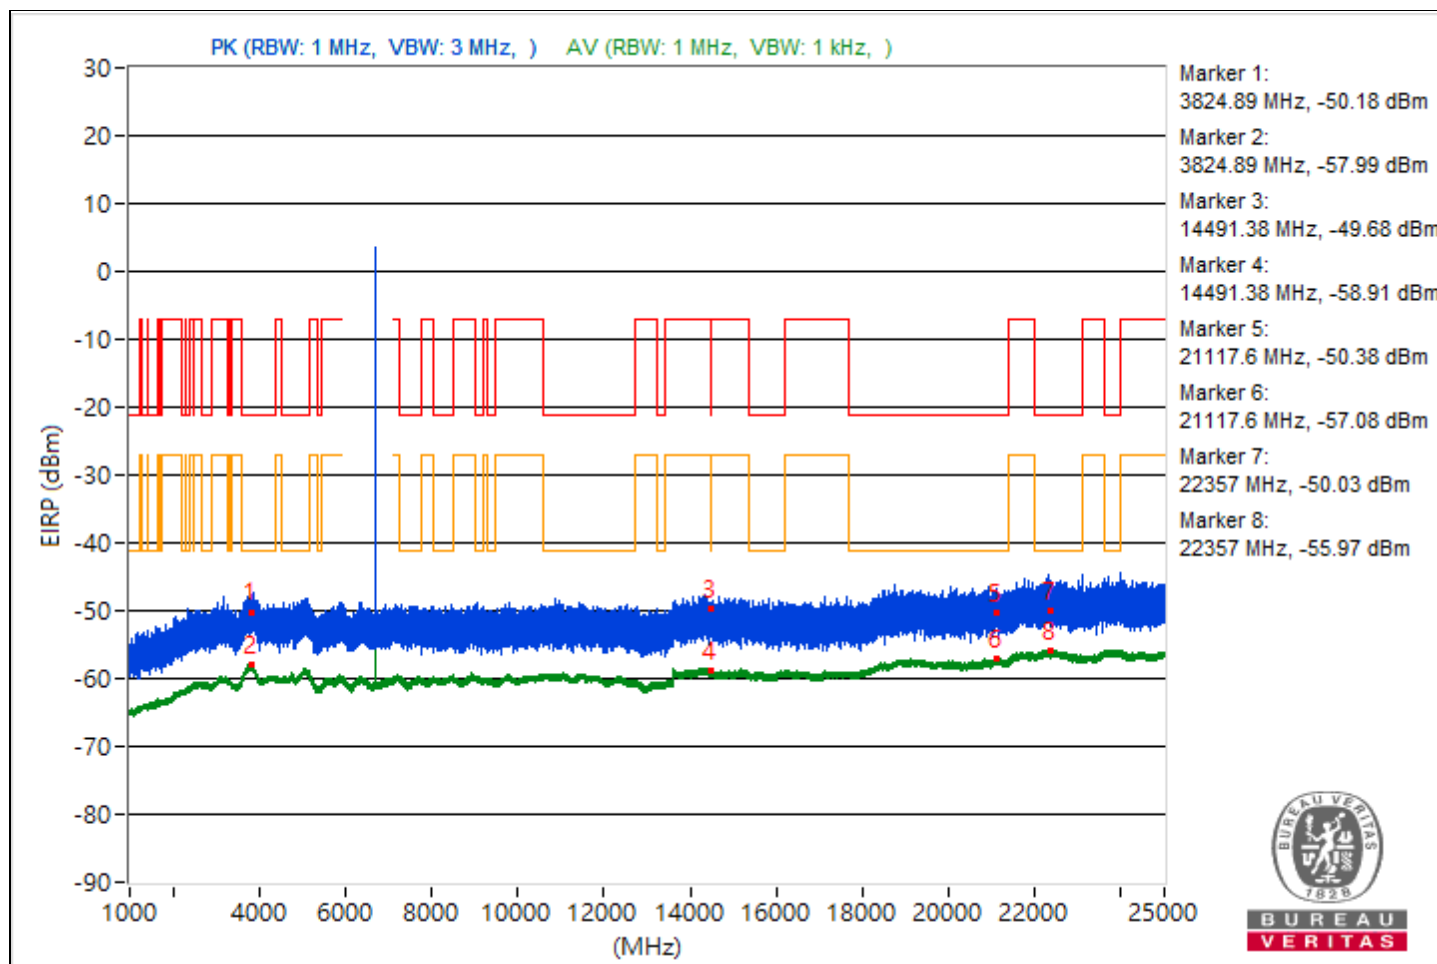


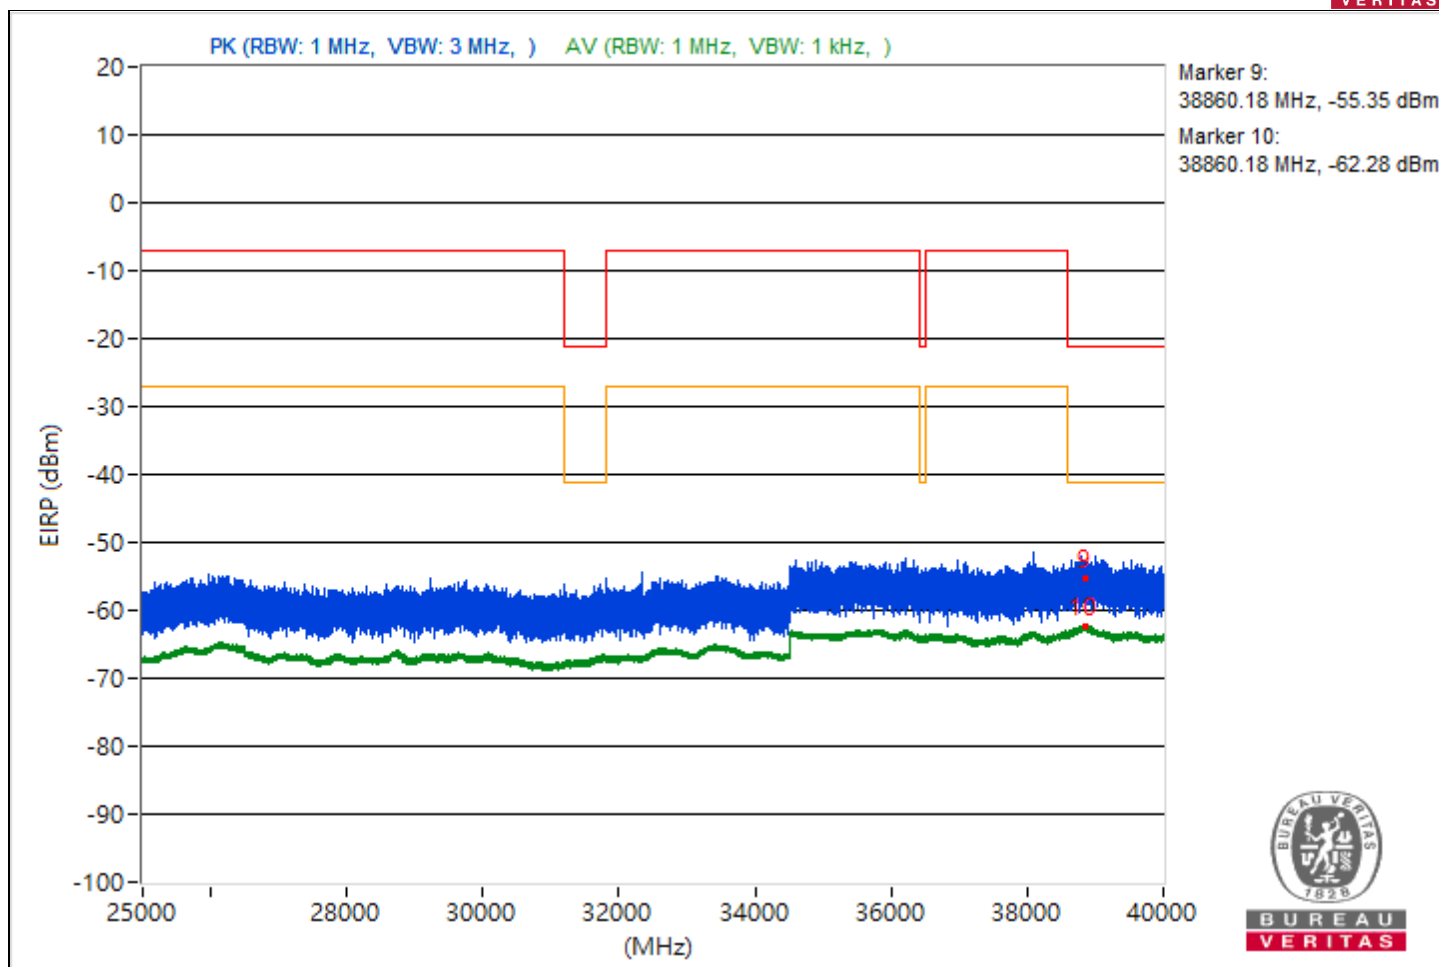


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.6	45.74 PK	74	-28.26	-55.72	-60.34	4.92	-49.52
2	3812.6	37.3 AV	54	-16.7	-65.53	-66.28	4.92	-57.96
3	14491.64	44.93 PK	74	-29.07	-62.08	-56.27	4.92	-50.33
4	14491.64	36.32 AV	54	-17.68	-67.06	-66.68	4.92	-58.94
5	21148.6	45.77 PK	74	-28.23	-57.49	-57.34	4.92	-49.49
6	21148.6	38.15 AV	54	-15.85	-64.81	-65.27	4.92	-57.11
7	23621.8	48.02 PK	74	-25.98	-56.01	-54.47	4.92	-47.24
8	23621.8	39.48 AV	54	-14.52	-63.25	-64.23	4.92	-55.78
9	38843.64	40.49 PK	74	-33.51	-62.79	-62.6	4.92	-54.77
10	38843.64	33.25 AV	54	-20.75	-70.07	-69.81	4.92	-62.01

Note: Margin value = Emission Level - Limit value

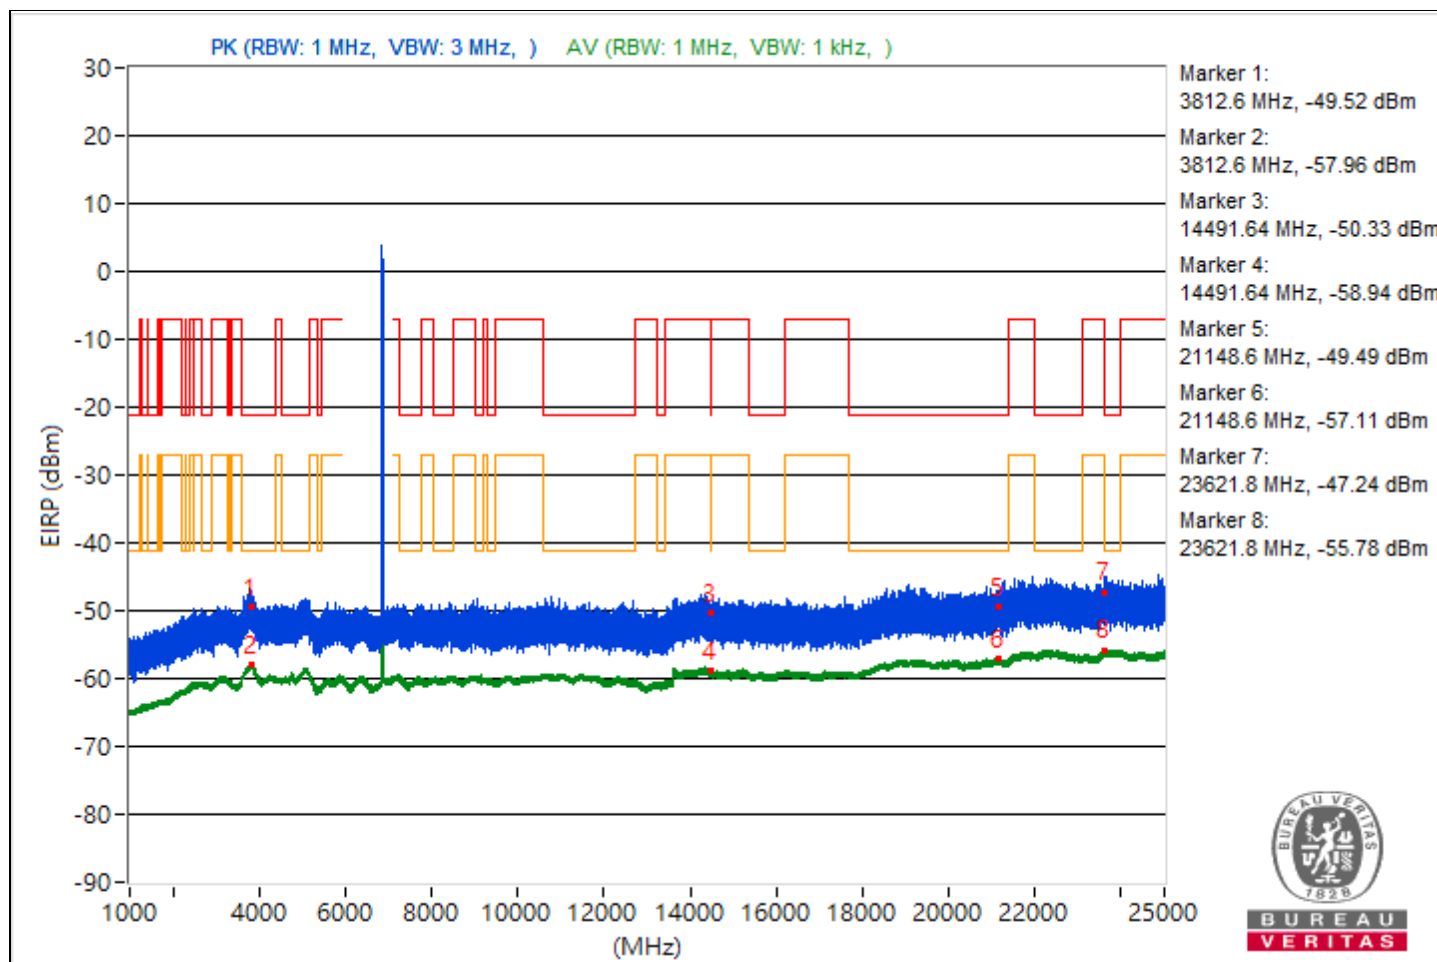


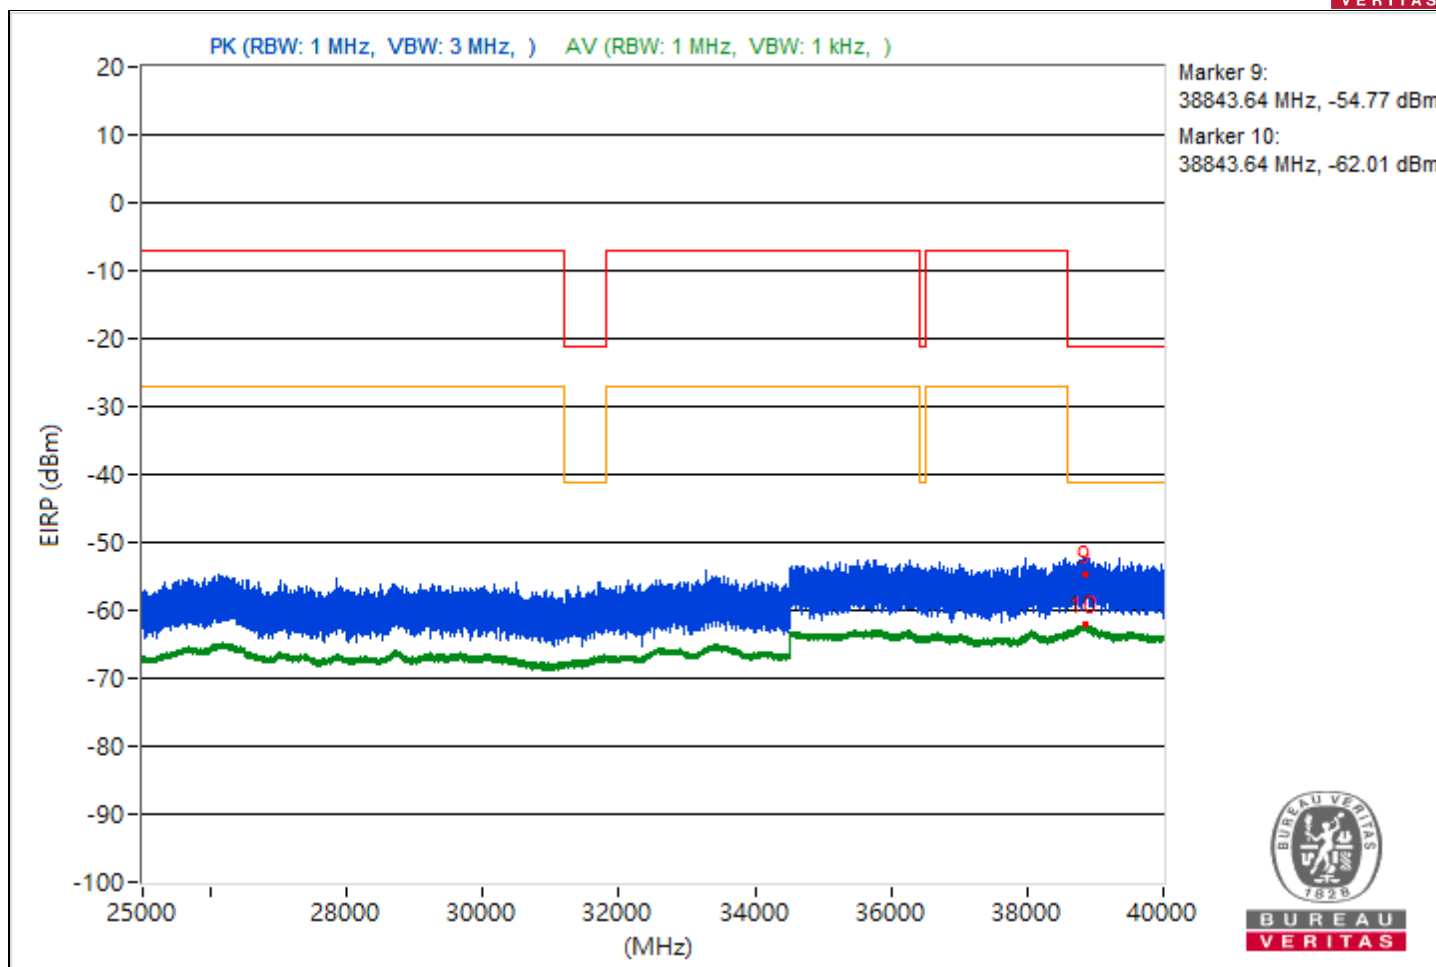


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3794.71	44.19 PK	74	-29.81	-58.5	-59.56	4.92	-51.07
2	3794.71	37.36 AV	54	-16.64	-66.04	-65.63	4.92	-57.9
3	14477.69	42.96 PK	74	-31.04	-61.88	-59.04	4.92	-52.3
4	14477.69	36.46 AV	54	-17.54	-66.42	-67.06	4.92	-58.8
5	21152.2	46.37 PK	74	-27.63	-56.98	-56.67	4.92	-48.89
6	21152.2	38.26 AV	54	-15.74	-64.73	-65.14	4.92	-57
7	23757.2	45.9 PK	74	-28.1	-58.7	-56.22	4.92	-49.36
8	23757.2	39.43 AV	54	-14.57	-64.08	-63.47	4.92	-55.83
9	38818.93	38.21 PK	74	-35.79	-66.69	-63.75	4.92	-57.05
10	38818.93	32.99 AV	54	-21.01	-70.71	-69.75	4.92	-62.27

Note: Margin value = Emission Level - Limit value

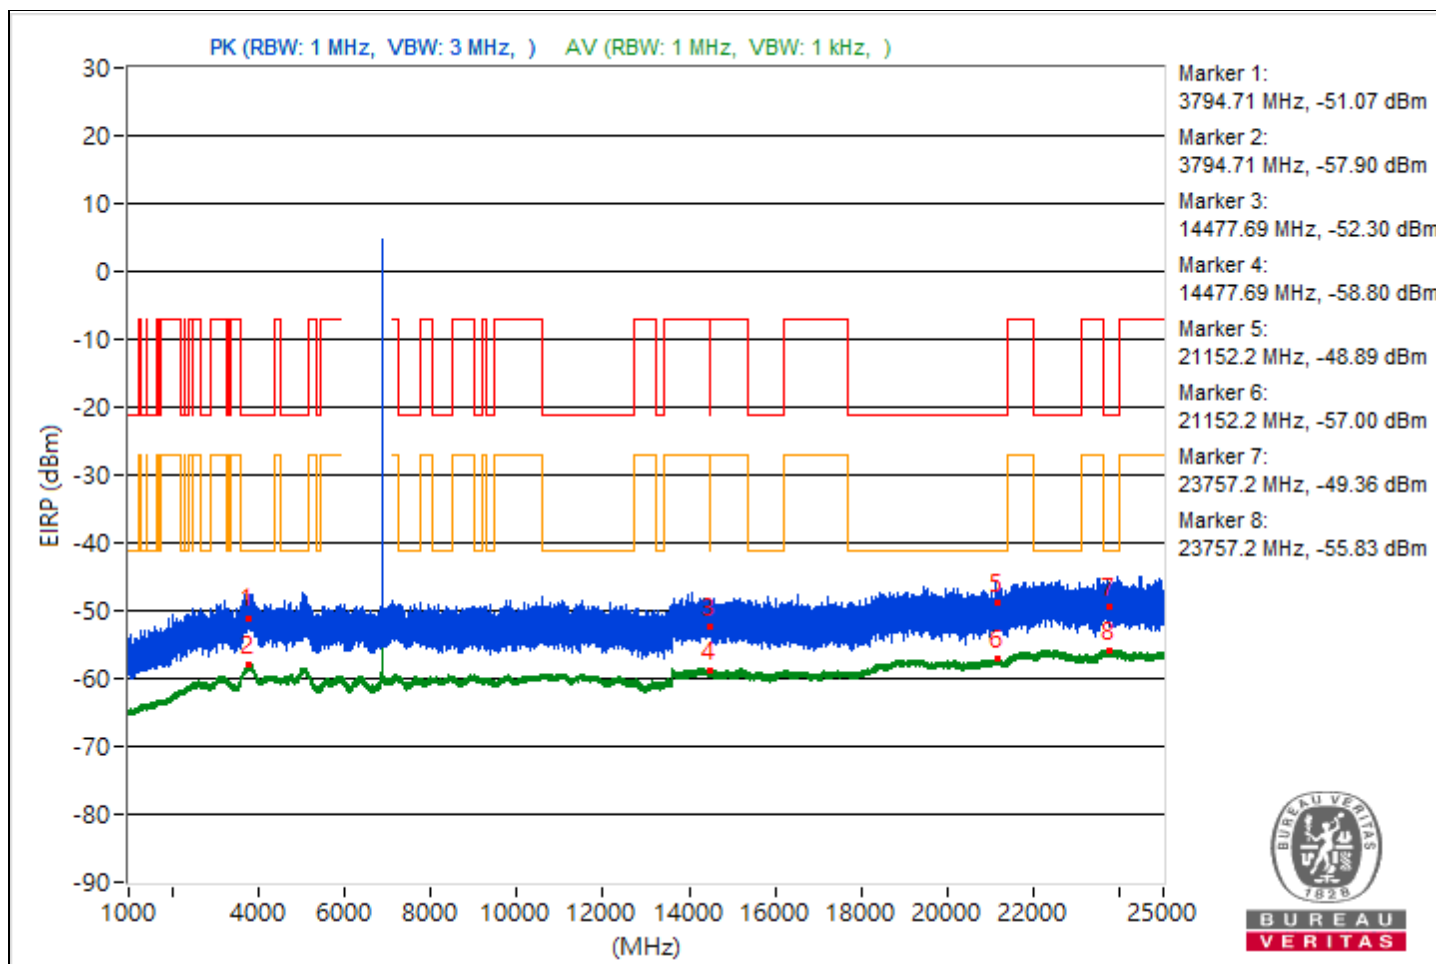


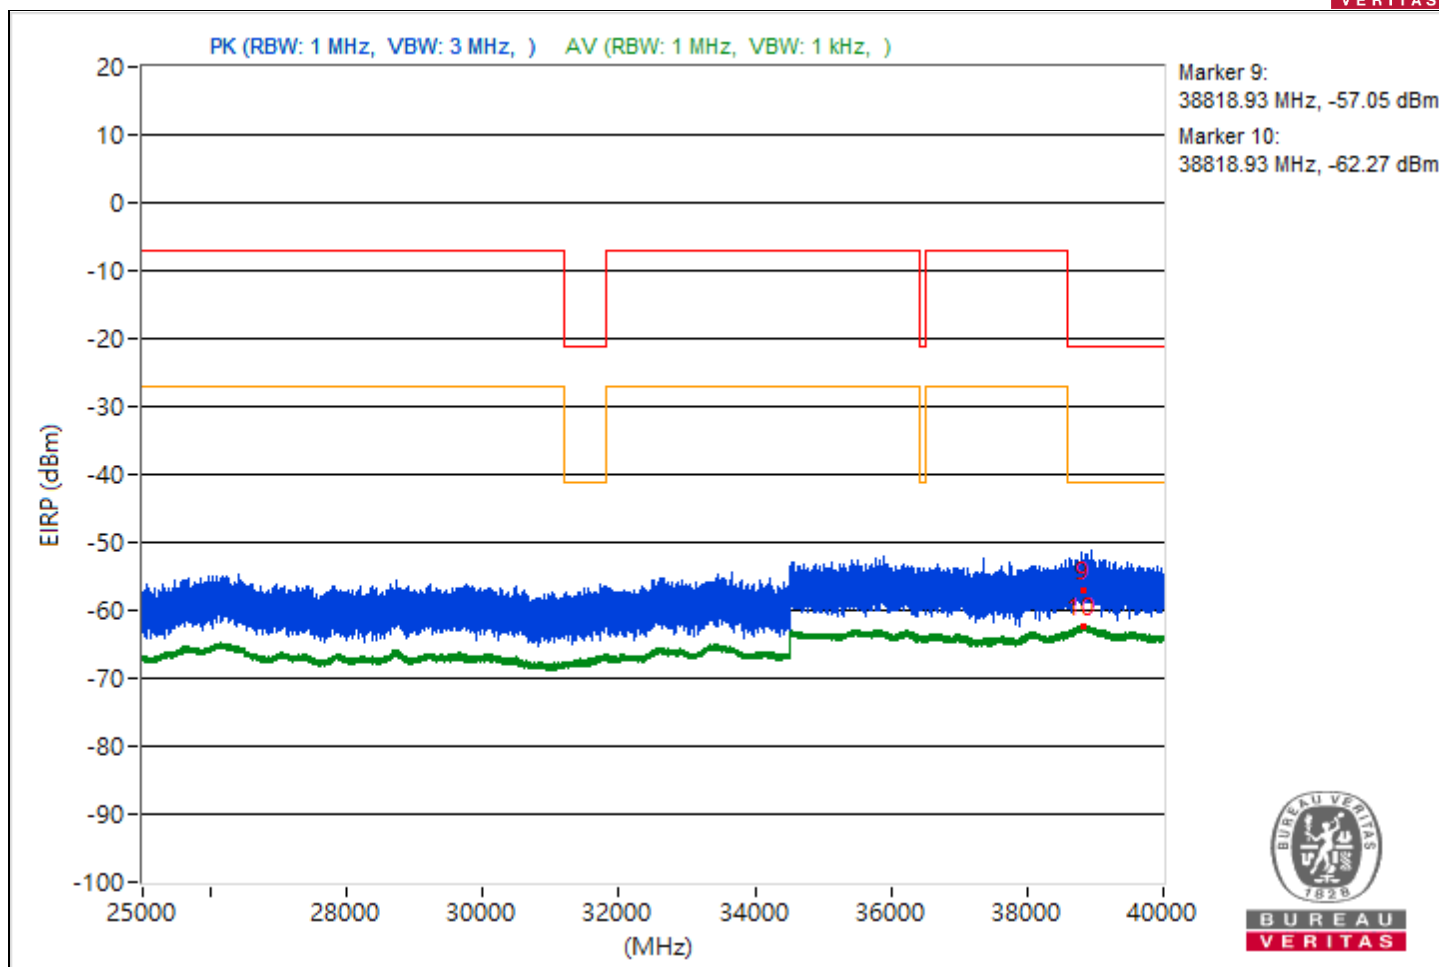


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.79	44.15 PK	74	-29.85	-58.94	-59.14	4.92	-51.11
2	3808.79	37.3 AV	54	-16.7	-65.56	-66.25	4.92	-57.96
3	14477.24	44.35 PK	74	-29.65	-57.99	-59.9	4.92	-50.91
4	14477.24	36.41 AV	54	-17.59	-66.96	-66.61	4.92	-58.85
5	21136	44.52 PK	74	-29.48	-59.58	-57.91	4.92	-50.74
6	21136	38.17 AV	54	-15.83	-64.88	-65.17	4.92	-57.09
7	23709.9	48.73 PK	74	-25.27	-54.6	-54.31	4.92	-46.53
8	23709.9	39.57 AV	54	-14.43	-63.86	-63.39	4.92	-55.69
9	38857.16	39.83 PK	74	-34.17	-65.76	-61.83	4.92	-55.43
10	38857.16	33.18 AV	54	-20.82	-70.28	-69.75	4.92	-62.08

Note: Margin value = Emission Level - Limit value

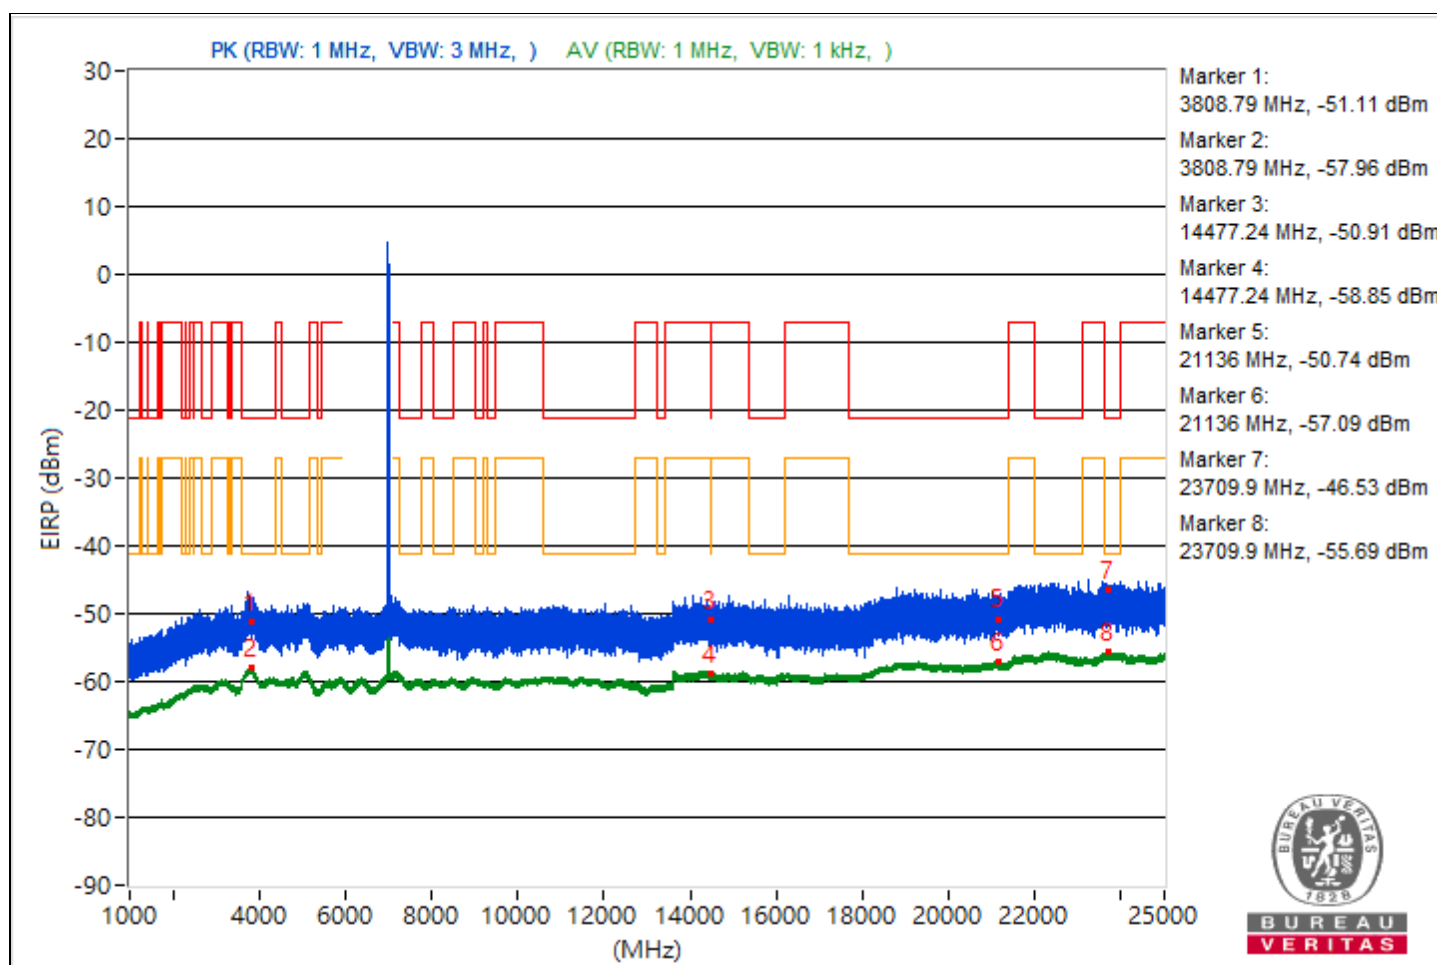


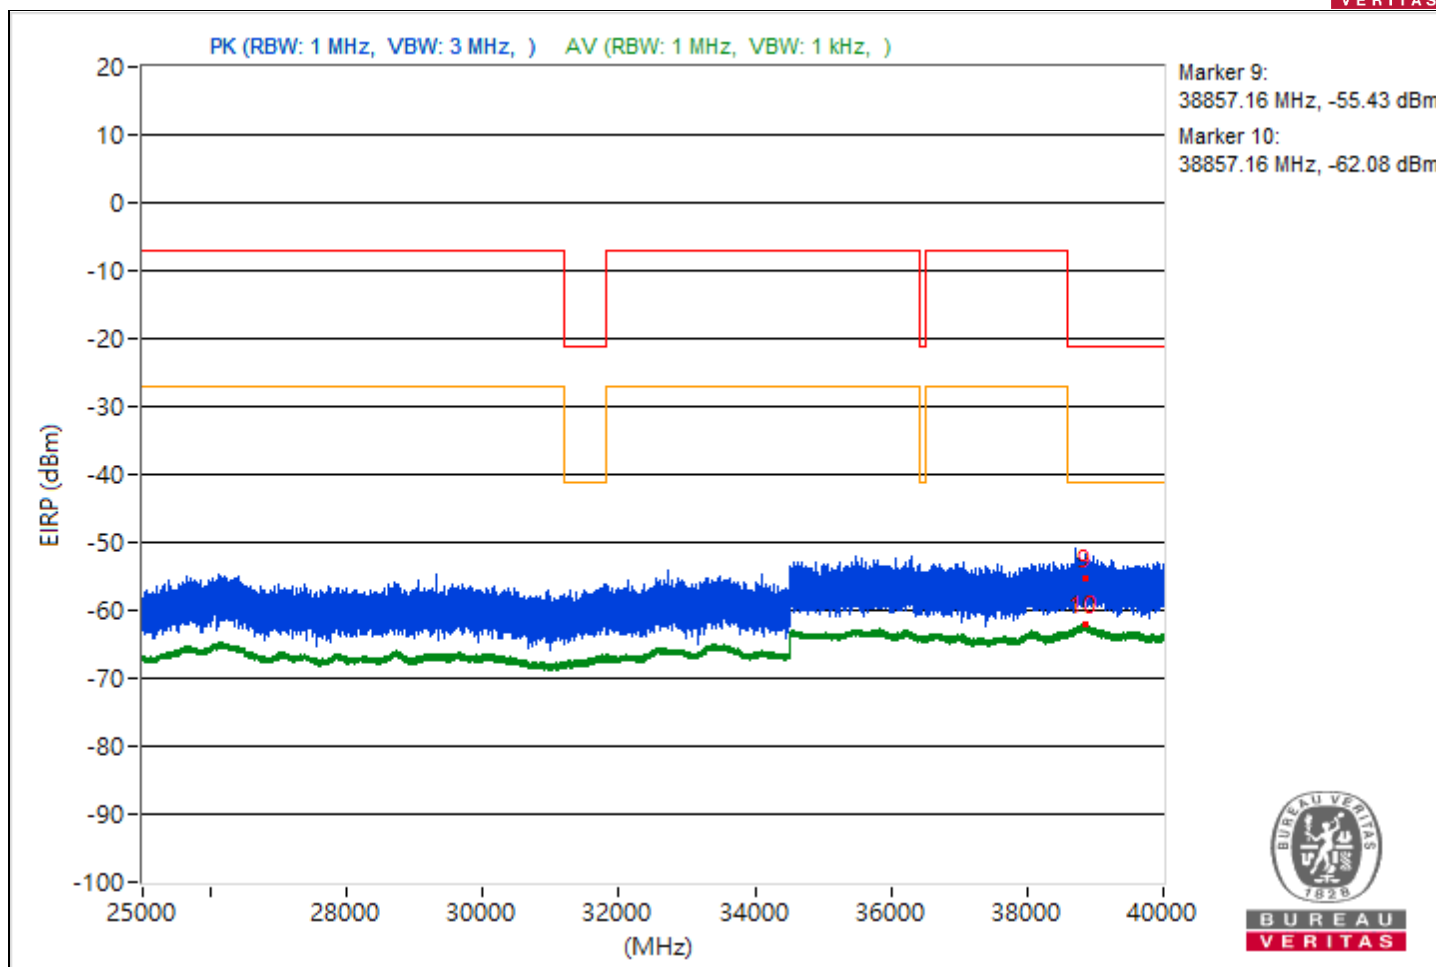


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3781.26	44.27 PK	74	-29.73	-59.38	-58.51	4.92	-50.99
2	3781.26	37.21 AV	54	-16.79	-65.58	-66.43	4.92	-58.05
3	7261.03	44.78 PK	74	-29.22	-57.65	-59.34	4.92	-50.48
4	7261.03	37.17 AV	54	-16.83	-65.78	-66.28	4.92	-58.09
5	21166.3	45.74 PK	74	-28.26	-58.13	-56.87	4.92	-49.52
6	21166.3	38.02 AV	54	-15.98	-64.82	-65.55	4.92	-57.24
7	23740.9	47.86 PK	74	-26.14	-55.3	-55.35	4.92	-47.4
8	23740.9	39.28 AV	54	-14.72	-64.49	-63.4	4.92	-55.98
9	38808.62	37.79 PK	74	-36.21	-66.47	-64.54	4.92	-57.47
10	38808.62	33.27 AV	54	-20.73	-69.76	-70.1	4.92	-61.99

Note: Margin value = Emission Level - Limit value

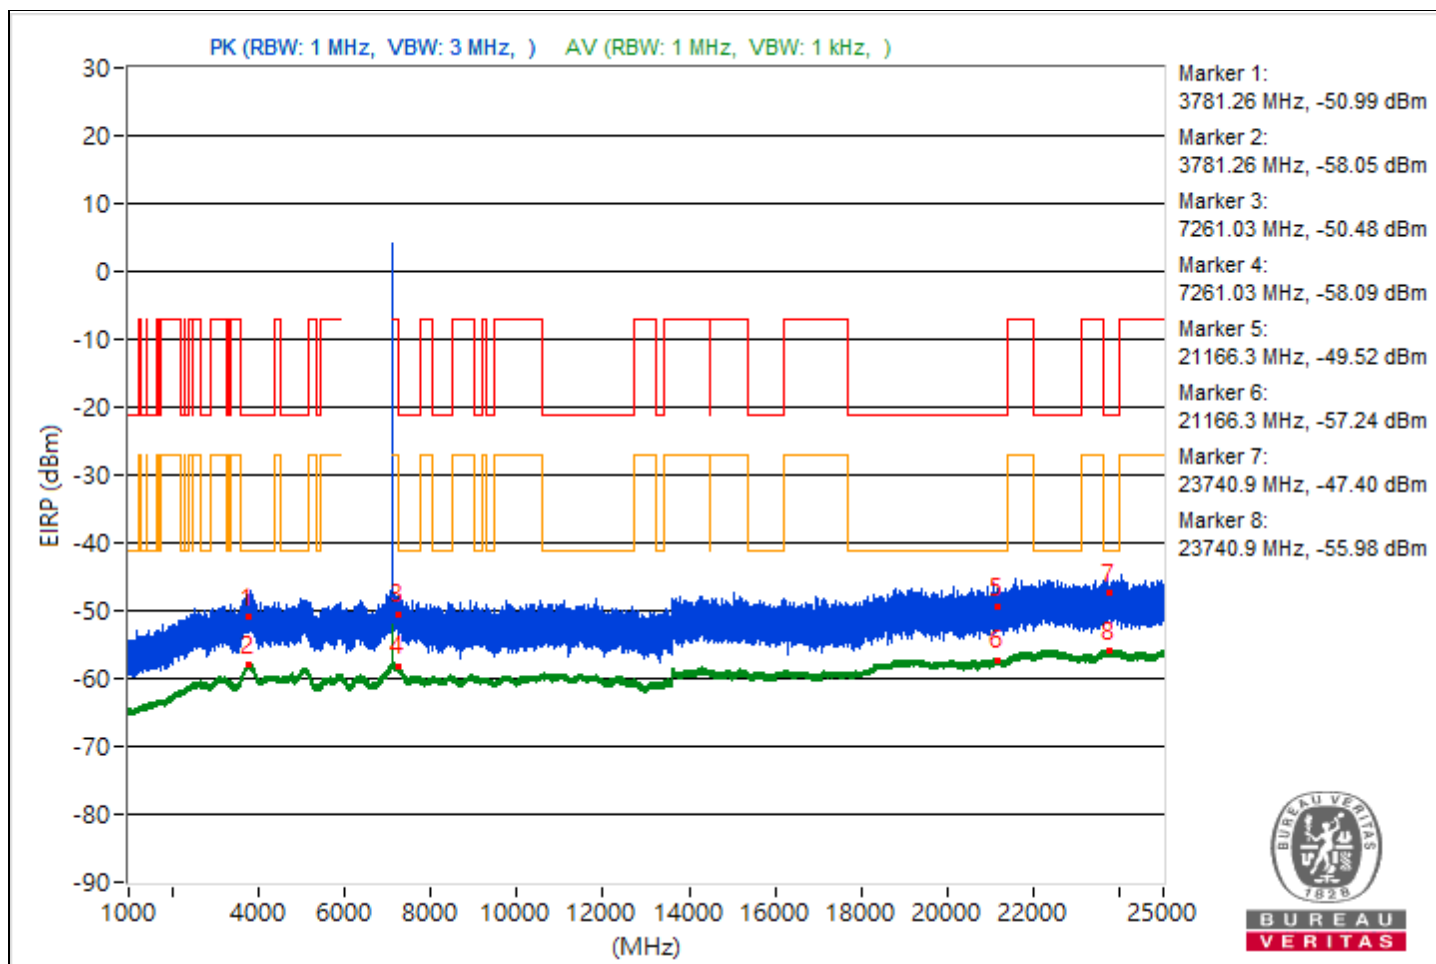


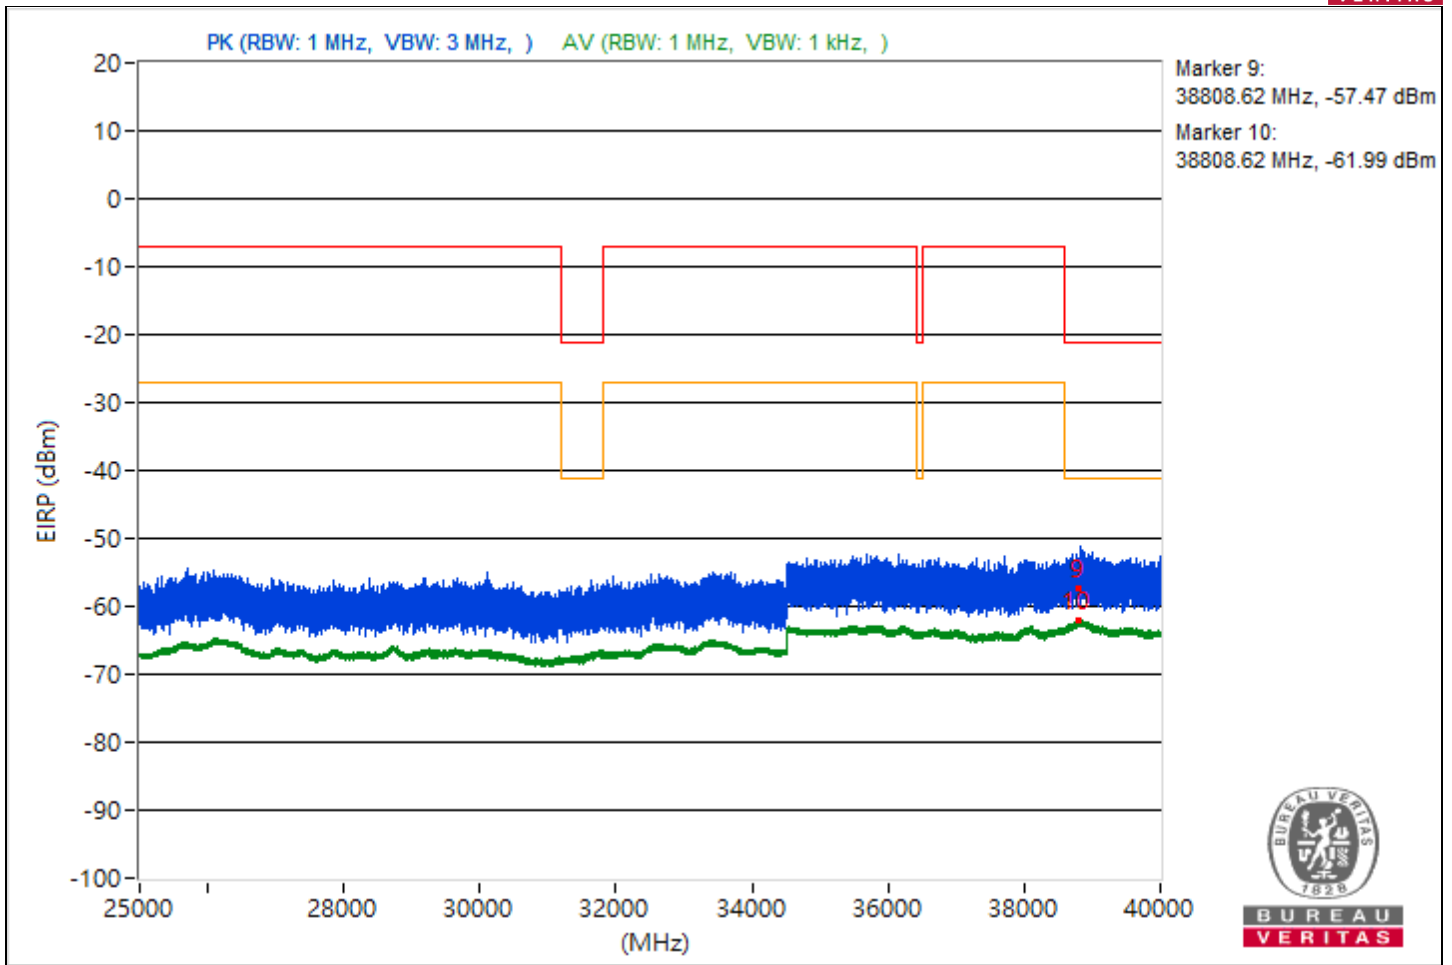


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.03	45.19 PK	74	-28.81	-57.62	-58.42	4.92	-50.07
2	3817.03	37.32 AV	54	-16.68	-65.37	-66.45	4.92	-57.94
3	14488	43.75 PK	74	-30.25	-59.33	-59.55	4.92	-51.51
4	14488	36.52 AV	54	-17.48	-66.44	-66.91	4.92	-58.74
5	21094.9	43.56 PK	74	-30.44	-60.36	-59.01	4.92	-51.7
6	21094.9	38.12 AV	54	-15.88	-65.42	-64.74	4.92	-57.14
7	22503.4	46.41 PK	74	-27.59	-57.09	-56.5	4.92	-48.85
8	22503.4	39.35 AV	54	-14.65	-63.44	-64.28	4.92	-55.91
9	38806.93	39.88 PK	74	-34.12	-64.73	-62.24	4.92	-55.38
10	38806.93	33.09 AV	54	-20.91	-70.35	-69.87	4.92	-62.17

Note: Margin value = Emission Level - Limit value

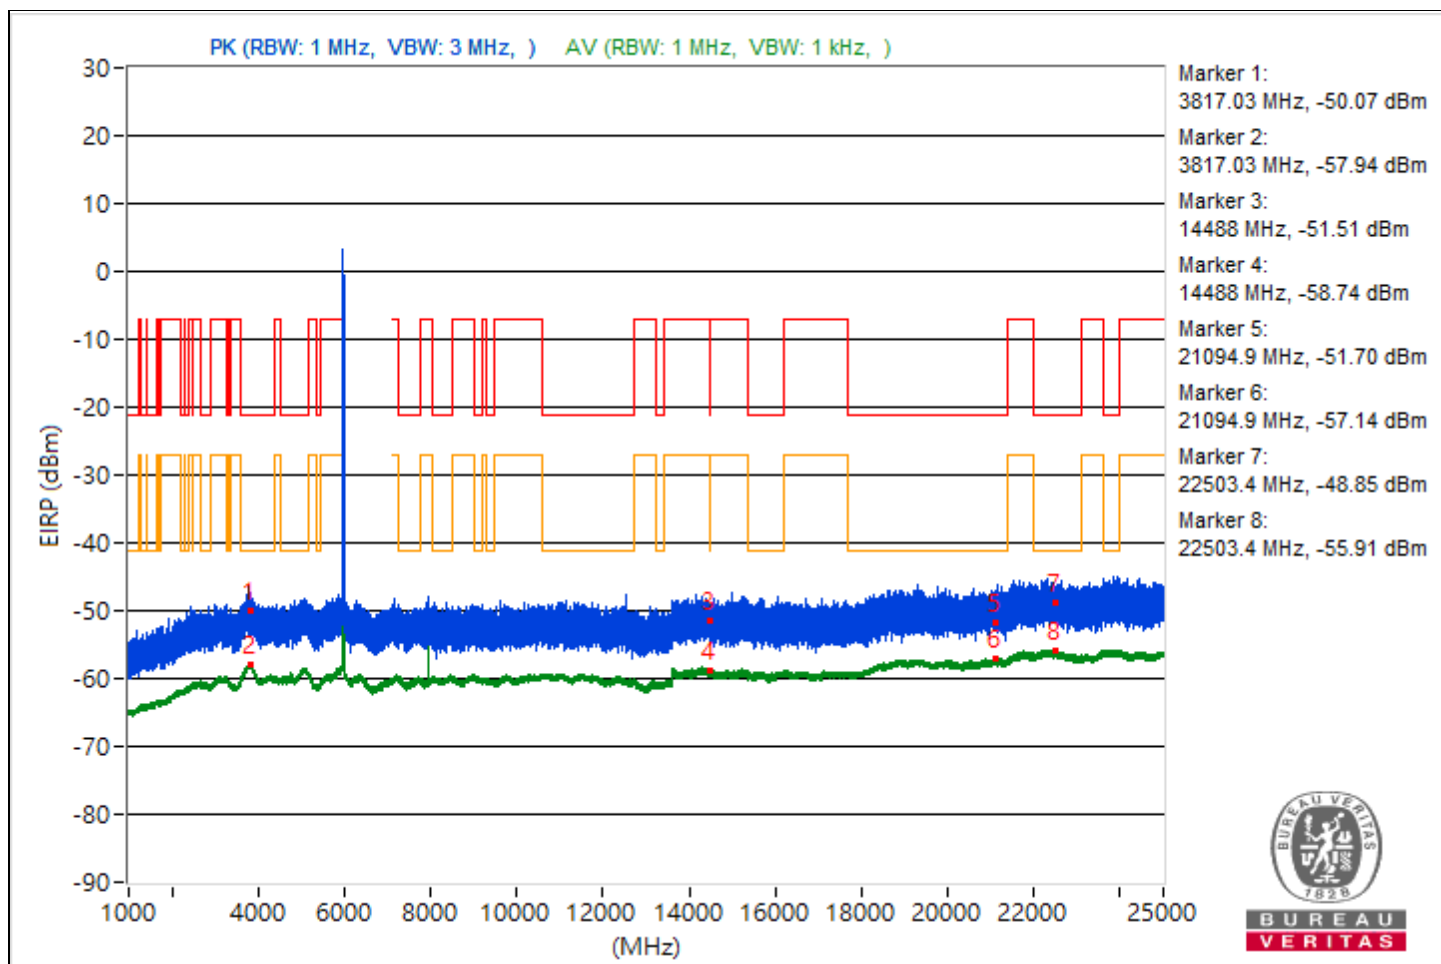


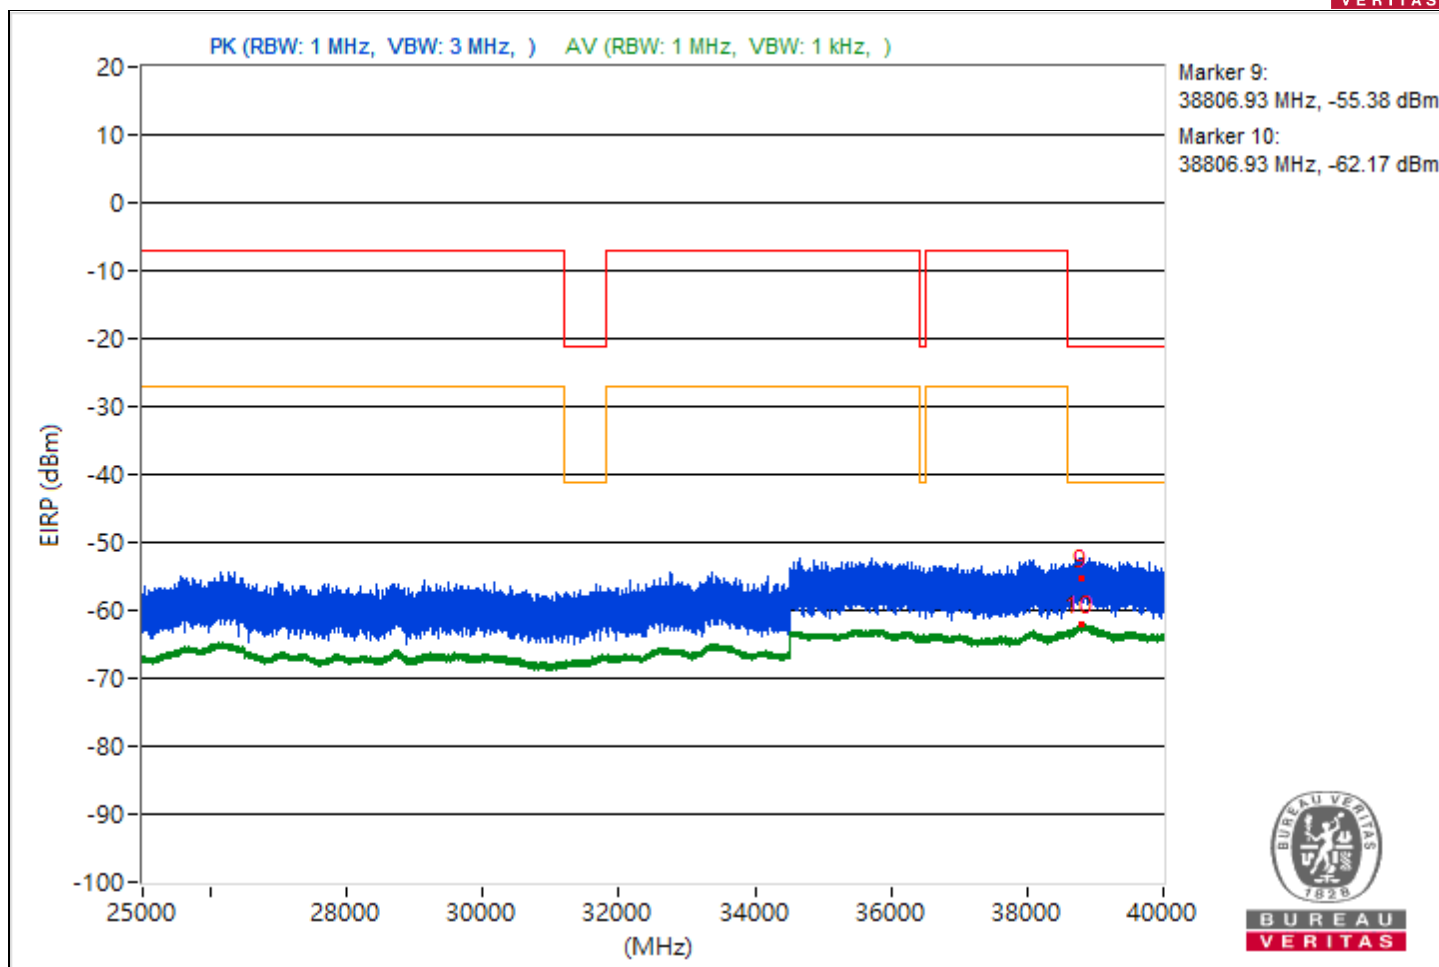


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3783.59	44.32 PK	74	-29.68	-58.58	-59.19	4.92	-50.94
2	3783.59	37.29 AV	54	-16.71	-66.1	-65.7	4.92	-57.97
3	8220.09	44.61 PK	74	-29.39	-56.58	-62.42	4.92	-50.65
4	8220.09	40.94 AV	54	-13.06	-59.85	-68.06	4.92	-54.32
5	21115.9	44.31 PK	74	-29.69	-57.78	-60.37	4.92	-50.95
6	21115.9	38.13 AV	54	-15.87	-64.88	-65.25	4.92	-57.13
7	23875.9	46.68 PK	74	-27.32	-55.39	-58.03	4.92	-48.58
8	23875.9	39.32 AV	54	-14.68	-63.5	-64.27	4.92	-55.94
9	38848	38.71 PK	74	-35.29	-63.17	-66.36	4.92	-56.55
10	38848	33.03 AV	54	-20.97	-70.51	-69.84	4.92	-62.23

Note: Margin value = Emission Level - Limit value

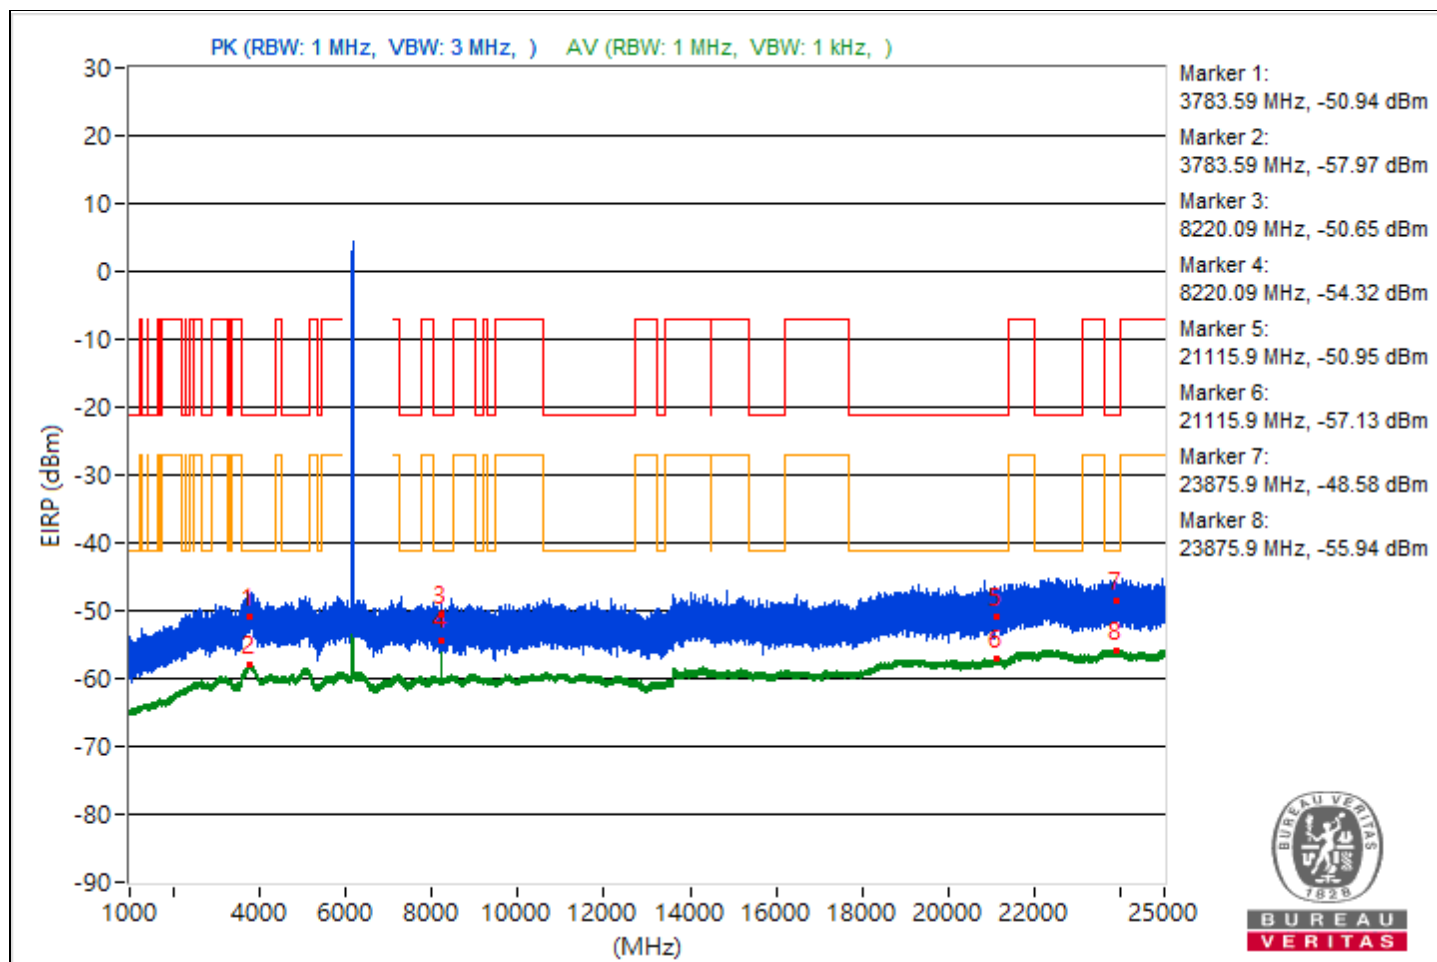


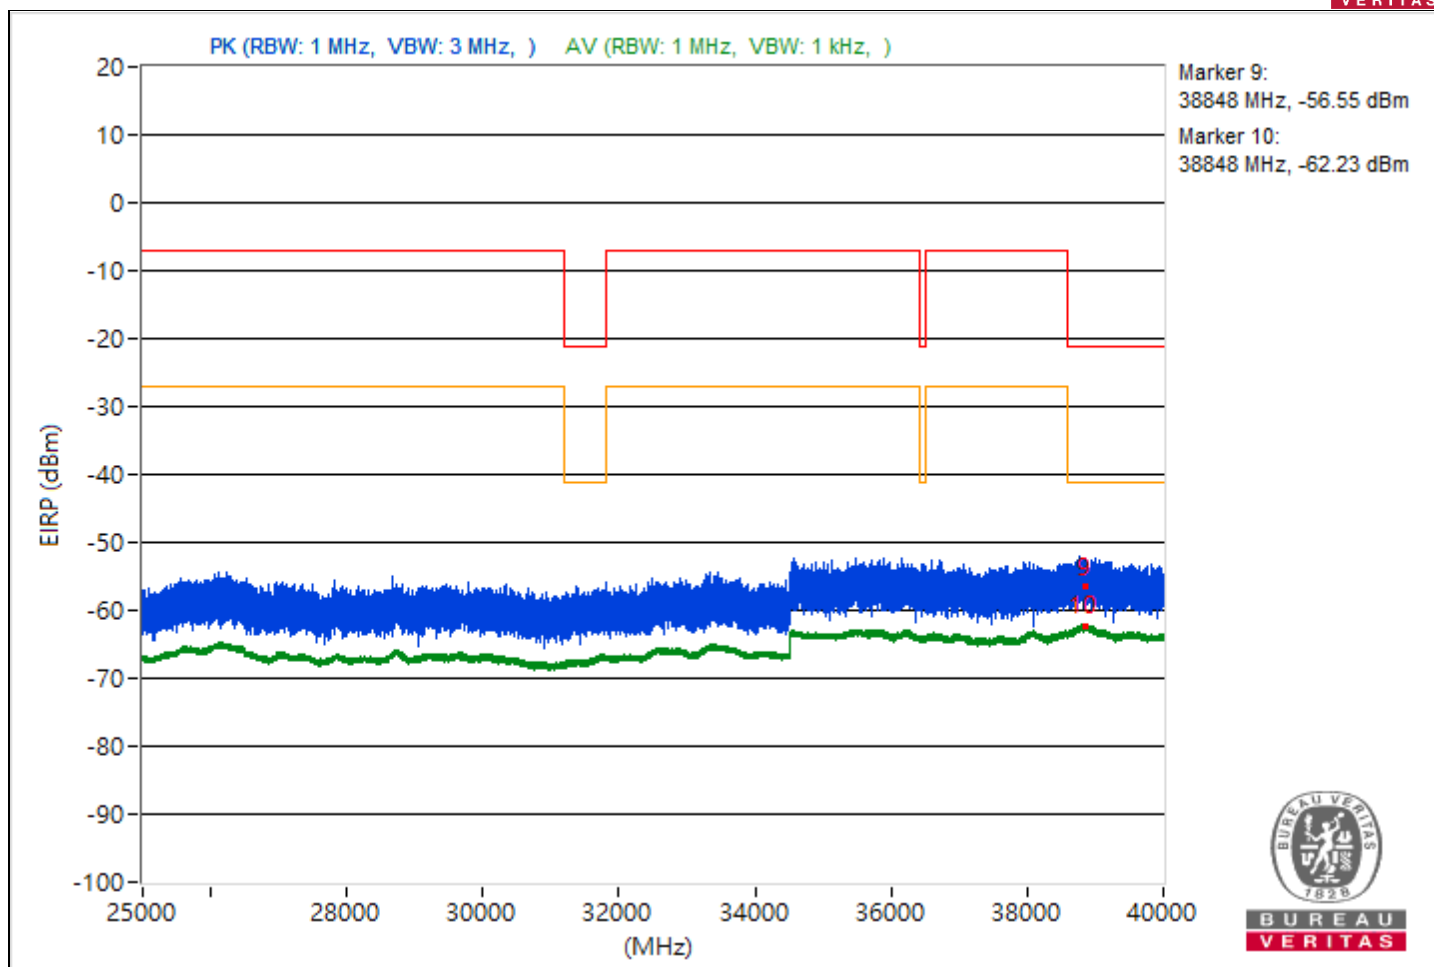


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3792.46	45.67 PK	74	-28.33	-55.72	-60.66	4.92	-49.59
2	3792.46	37.39 AV	54	-16.61	-66	-65.62	4.92	-57.87
3	14486.13	43.56 PK	74	-30.44	-60.01	-59.28	4.92	-51.7
4	14486.13	36.42 AV	54	-17.58	-66.96	-66.58	4.92	-58.84
5	21397	45.5 PK	74	-28.5	-57.6	-57.78	4.92	-49.76
6	21397	38.1 AV	54	-15.9	-65.41	-64.8	4.92	-57.16
7	22241.1	47.95 PK	74	-26.05	-55.22	-55.25	4.92	-47.31
8	22241.1	39.55 AV	54	-14.45	-63.96	-63.35	4.92	-55.71
9	38868.36	39.04 PK	74	-34.96	-63.25	-65.28	4.92	-56.22
10	38868.36	33.08 AV	54	-20.92	-69.9	-70.33	4.92	-62.18

Note: Margin value = Emission Level - Limit value

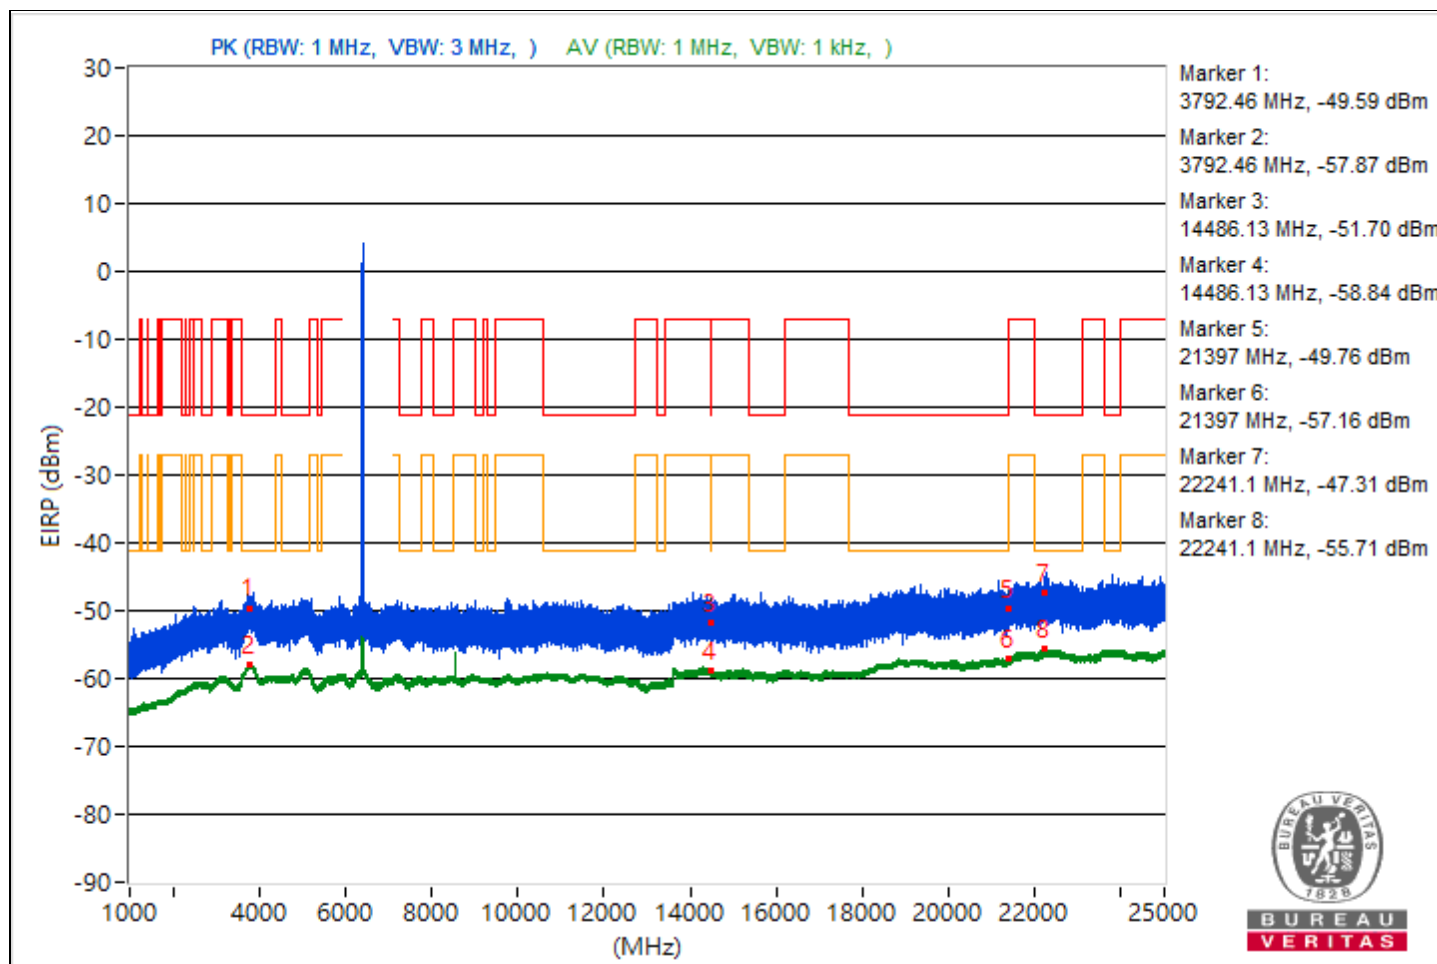


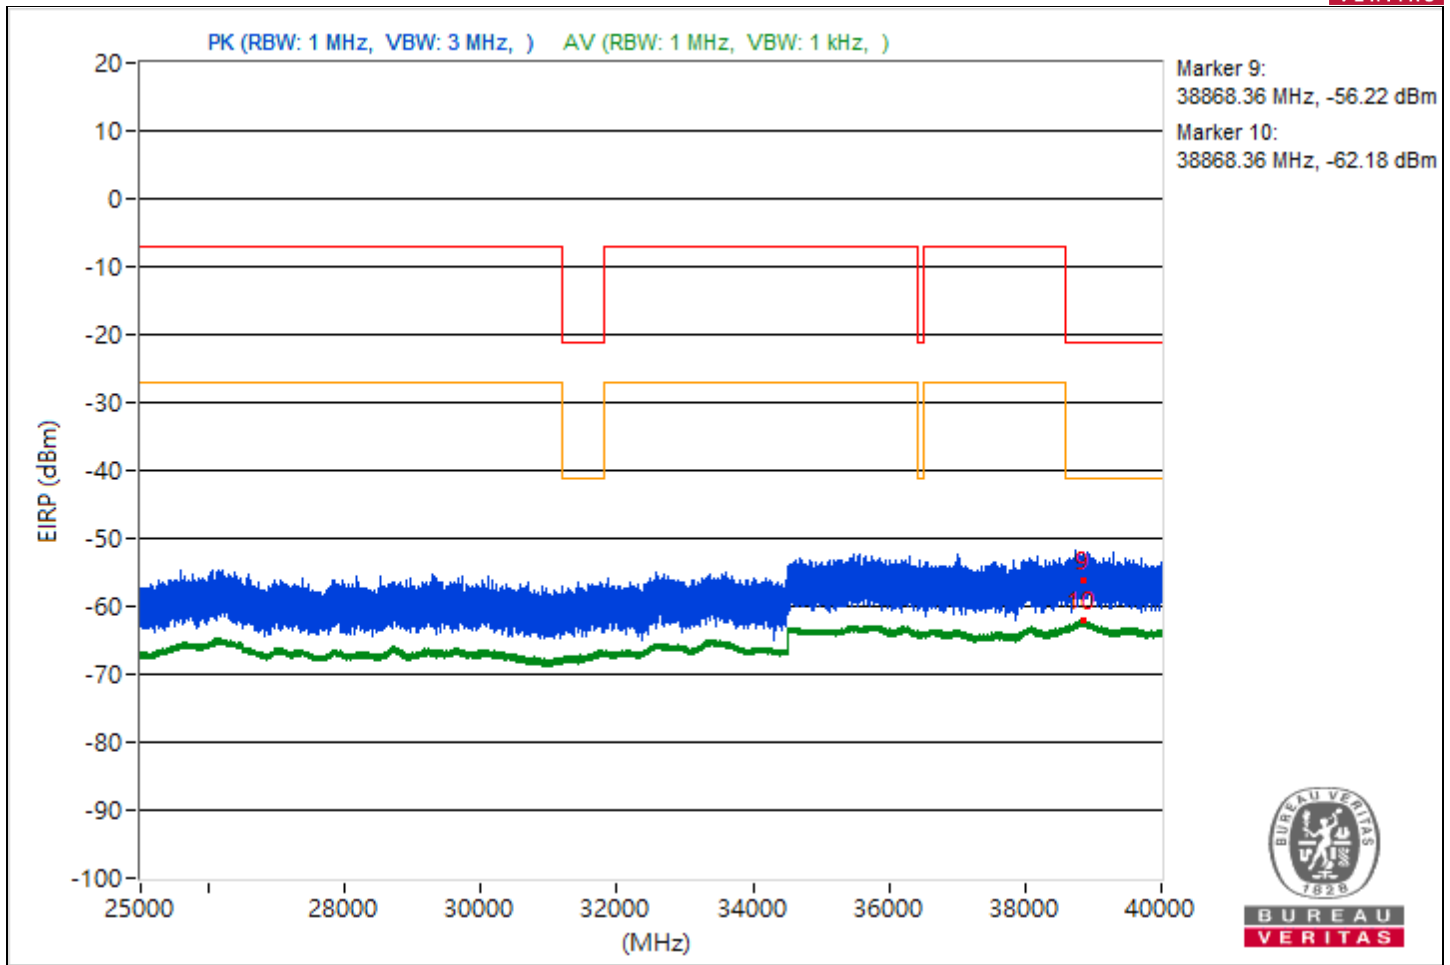


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3766.87	46.82 PK	74	-27.18	-55.1	-58.17	4.92	-48.44
2	3766.87	37.41 AV	54	-16.59	-66.07	-65.51	4.92	-57.85
3	14496.44	44.2 PK	74	-29.8	-59.01	-58.97	4.92	-51.06
4	14496.44	36.32 AV	54	-17.68	-66.51	-67.26	4.92	-58.94
5	21150.2	44.69 PK	74	-29.31	-58.53	-58.48	4.92	-50.57
6	21150.2	38.23 AV	54	-15.77	-65.23	-64.72	4.92	-57.03
7	22306.9	46.85 PK	74	-27.15	-56.96	-55.79	4.92	-48.41
8	22306.9	39.38 AV	54	-14.62	-63.51	-64.13	4.92	-55.88
9	38838.04	39.87 PK	74	-34.13	-63.15	-63.49	4.92	-55.39
10	38838.04	33.06 AV	54	-20.94	-69.84	-70.45	4.92	-62.2

Note: Margin value = Emission Level - Limit value

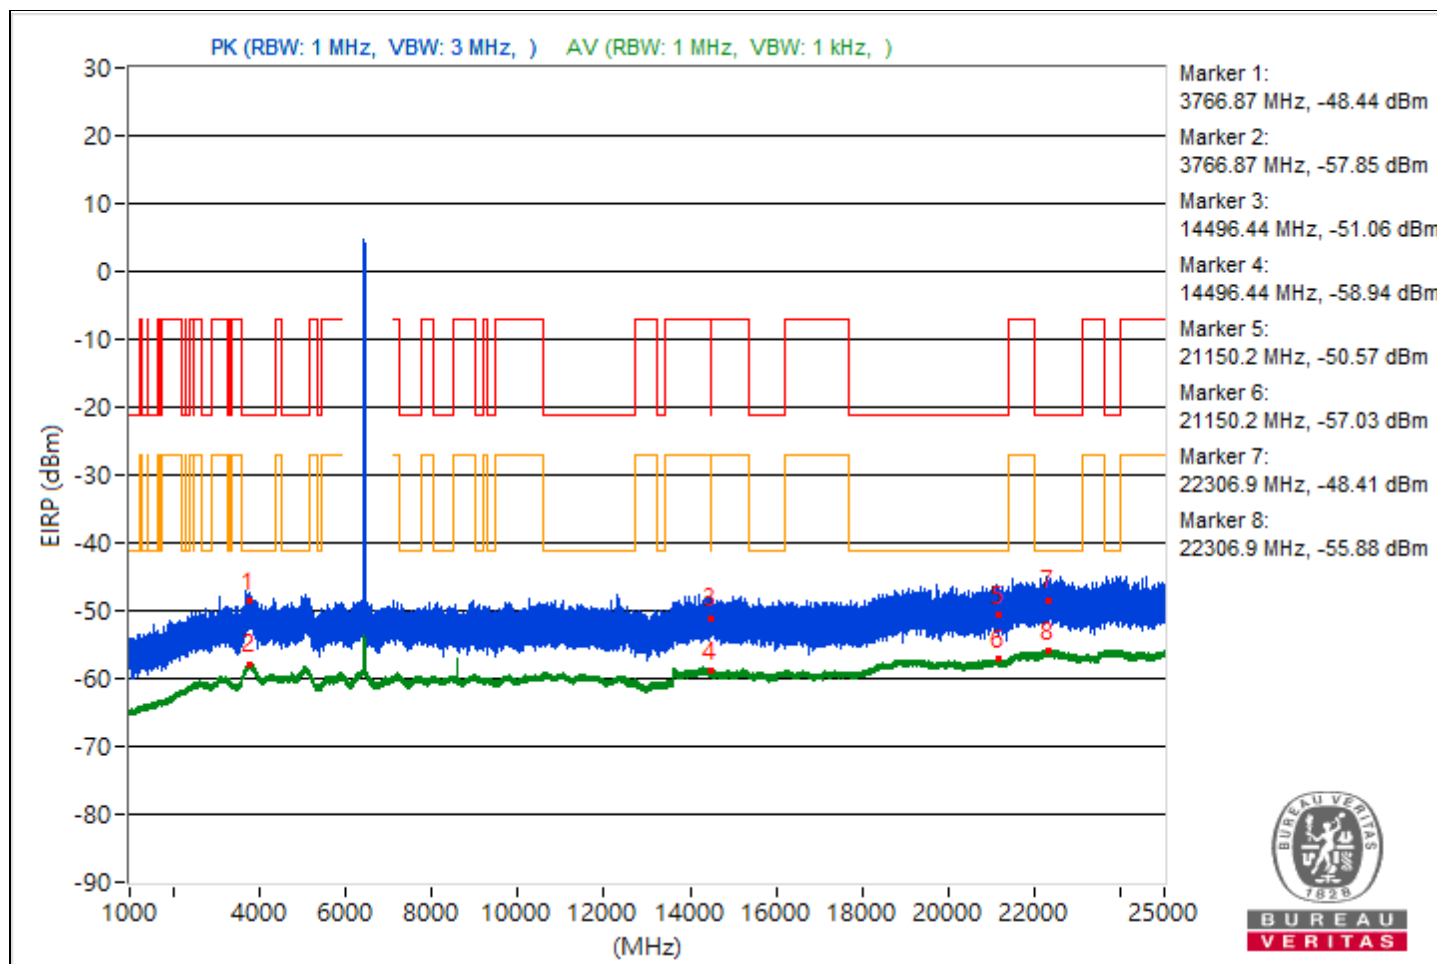


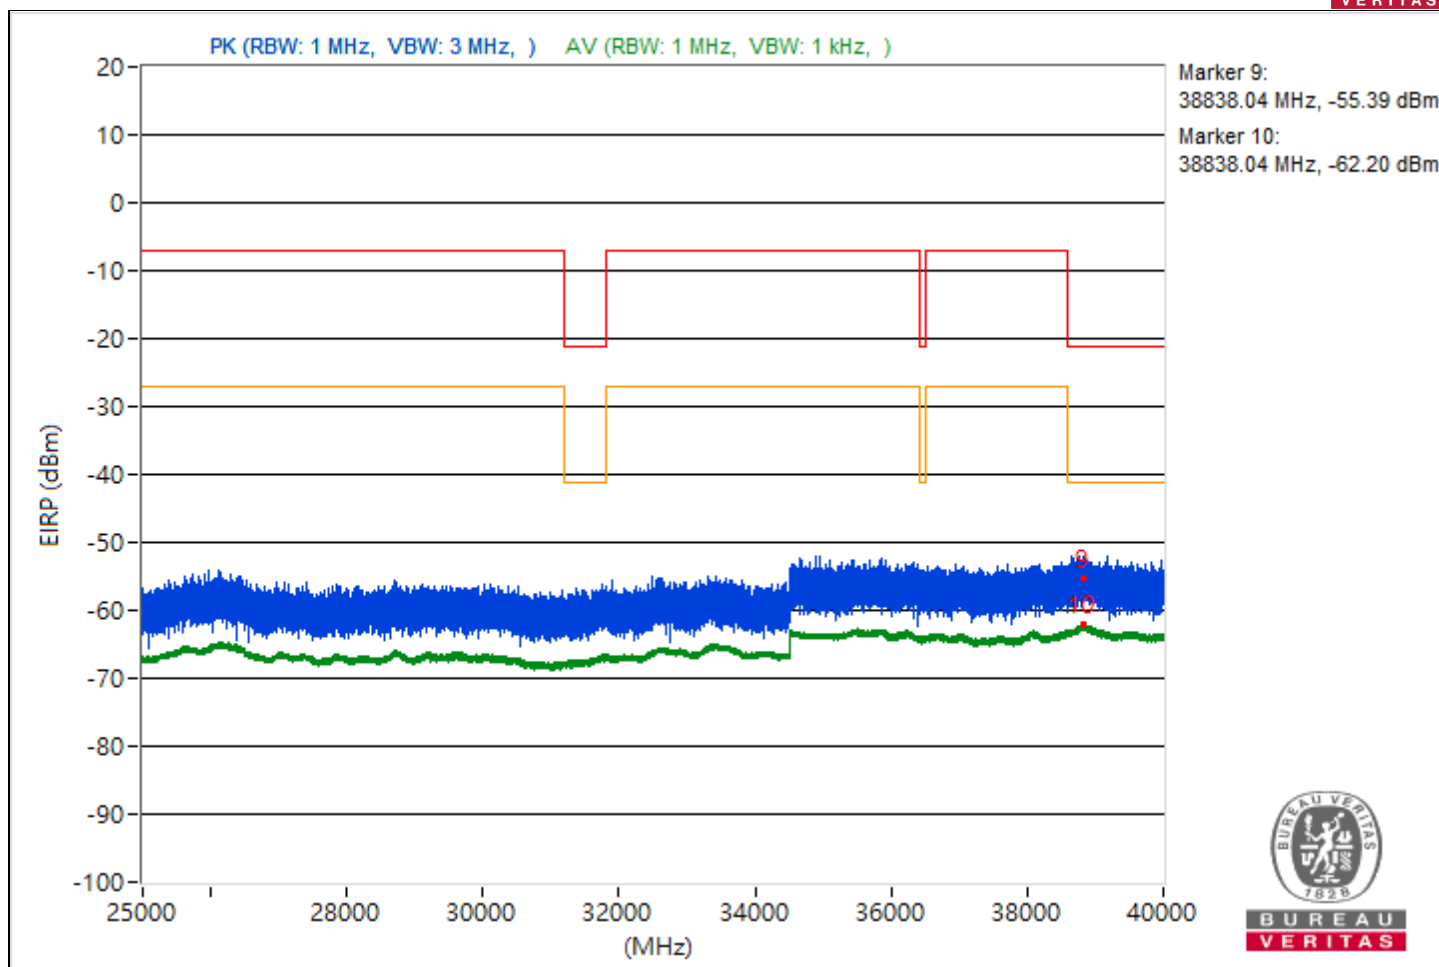


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3822.17	44.77 PK	74	-29.23	-59.44	-57.59	4.92	-50.49
2	3822.17	37.27 AV	54	-16.73	-66.46	-65.45	4.92	-57.99
3	14473.24	44.71 PK	74	-29.29	-57.3	-60.1	4.92	-50.55
4	14473.24	36.33 AV	54	-17.67	-67.17	-66.57	4.92	-58.93
5	21071.6	45.08 PK	74	-28.92	-59.08	-57.32	4.92	-50.18
6	21071.6	38.12 AV	54	-15.88	-65.57	-64.61	4.92	-57.14
7	22440.4	45.19 PK	74	-28.81	-57.63	-58.4	4.92	-50.07
8	22440.4	39.31 AV	54	-14.69	-64.35	-63.45	4.92	-55.95
9	38820.98	40.45 PK	74	-33.55	-61.89	-63.79	4.92	-54.81
10	38820.98	32.95 AV	54	-21.05	-70.77	-69.76	4.92	-62.31

Note: Margin value = Emission Level - Limit value

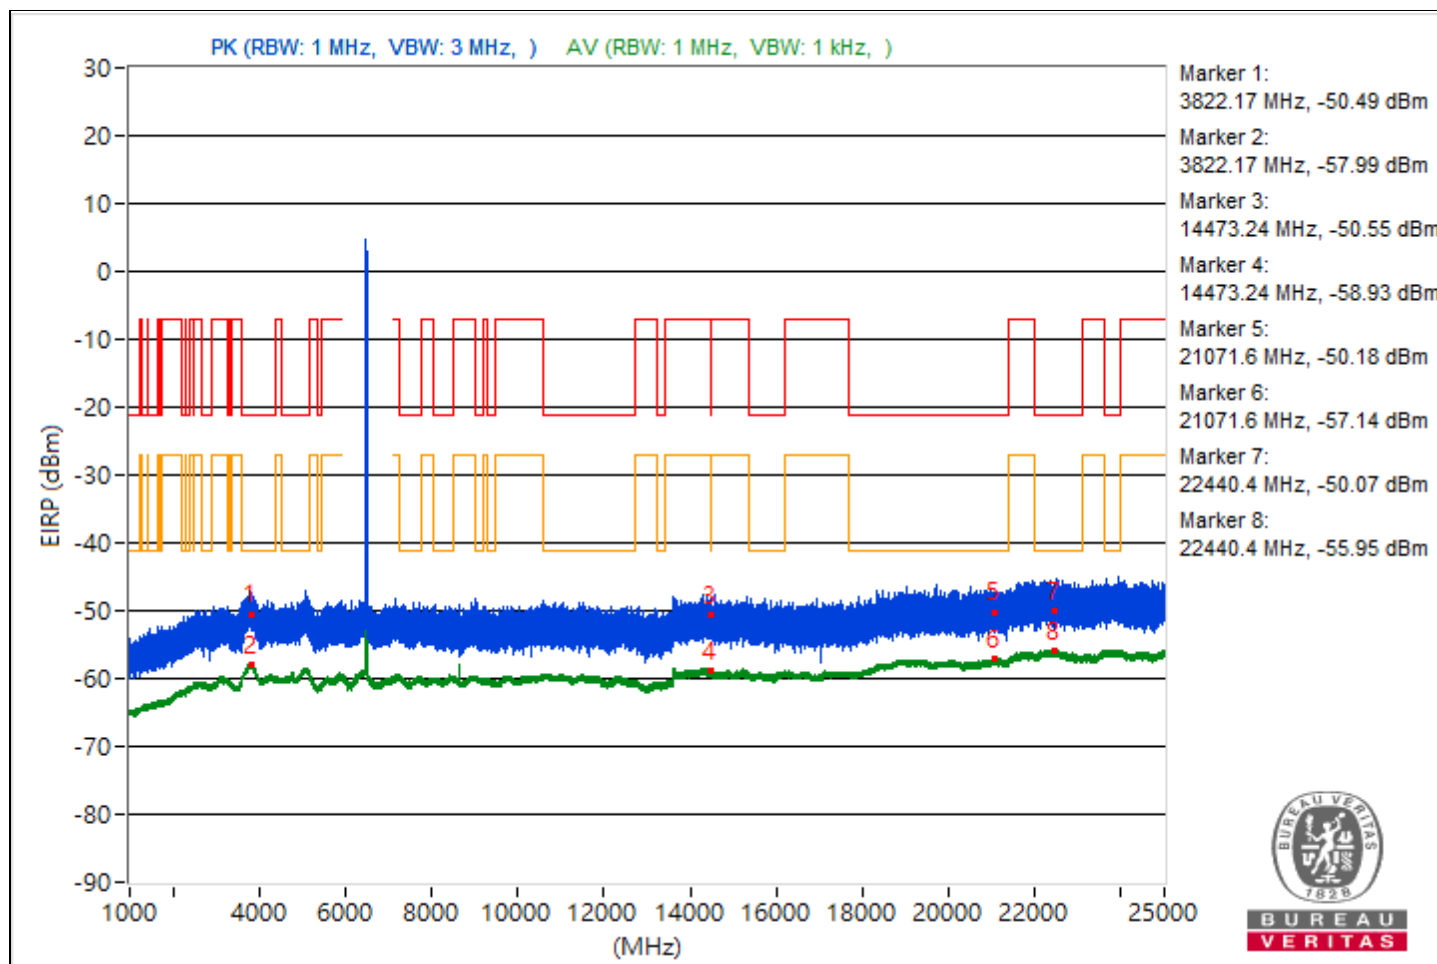


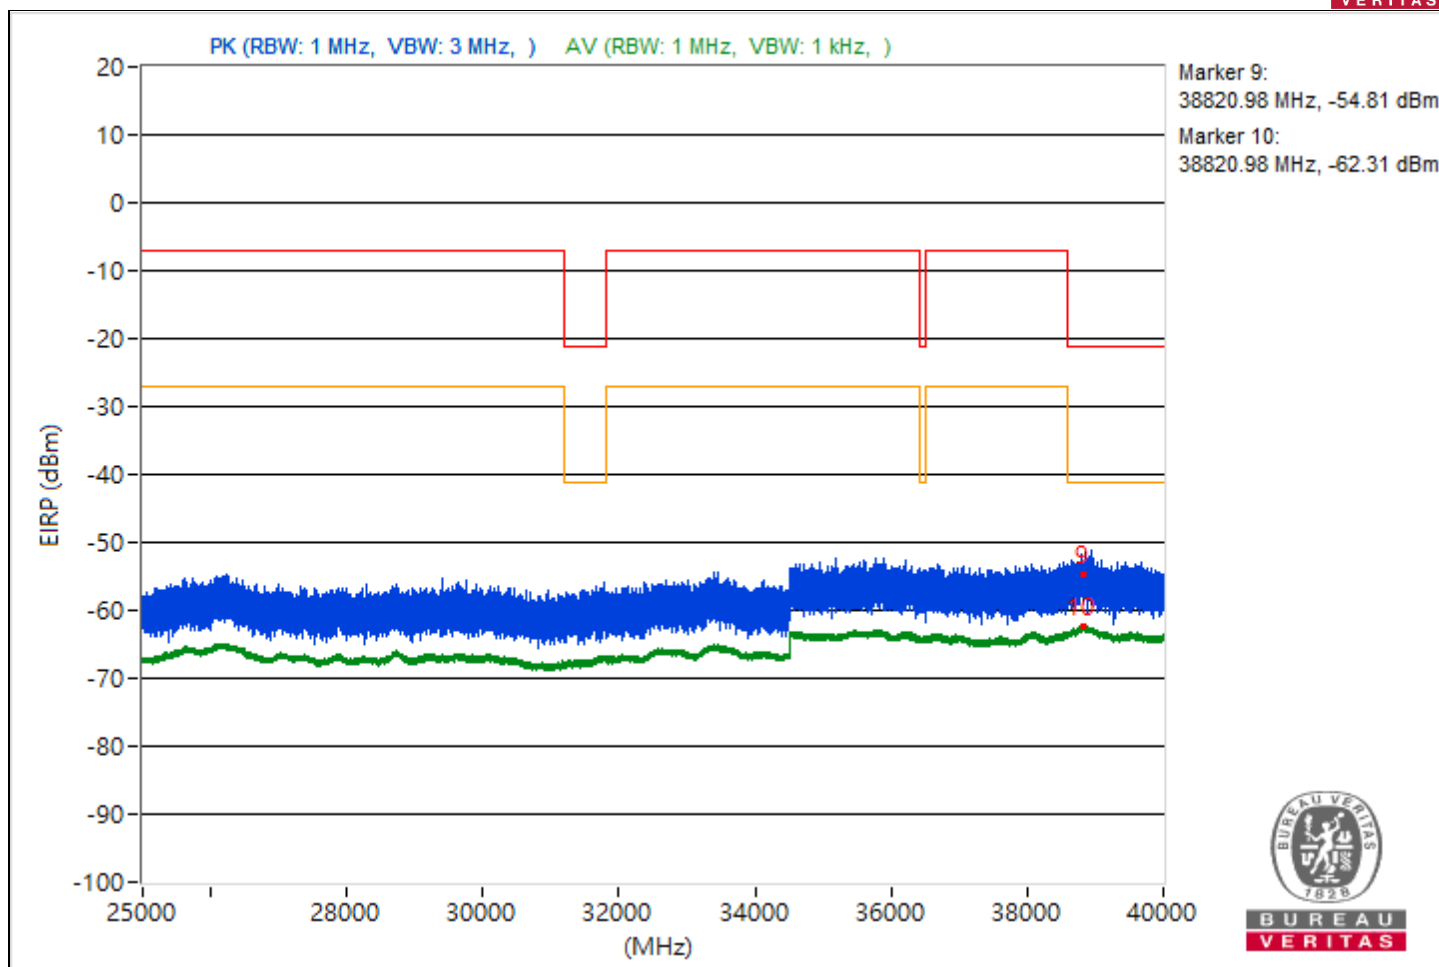


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.39	45.29 PK	74	-28.71	-57.58	-58.25	4.92	-49.97
2	3814.39	37.34 AV	54	-16.66	-65.75	-65.95	4.92	-57.92
3	14479.91	45.25 PK	74	-28.75	-60	-56.55	4.92	-50.01
4	14479.91	36.46 AV	54	-17.54	-66.64	-66.83	4.92	-58.8
5	21385	45.96 PK	74	-28.04	-55.52	-60.1	4.92	-49.3
6	21385	38.14 AV	54	-15.86	-64.66	-65.47	4.92	-57.12
7	22276.3	45.29 PK	74	-28.71	-58.35	-57.49	4.92	-49.97
8	22276.3	39.2 AV	54	-14.8	-63.46	-64.58	4.92	-56.06
9	38831.64	37.17 PK	74	-36.83	-65.47	-66.65	4.92	-58.09
10	38831.64	33.05 AV	54	-20.95	-70.62	-69.71	4.92	-62.21

Note: Margin value = Emission Level - Limit value

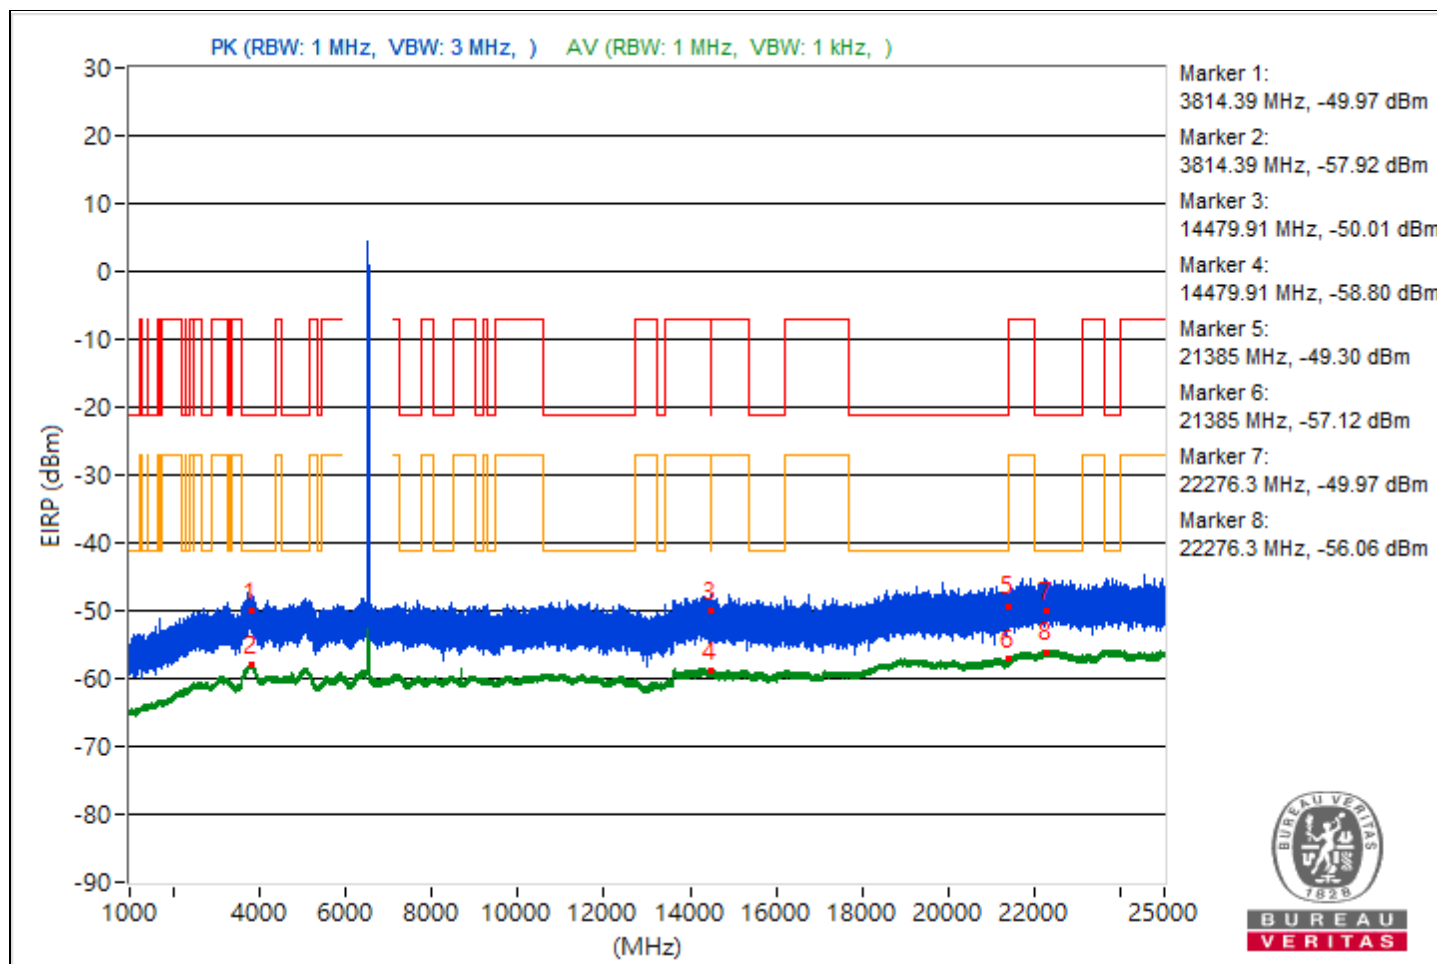


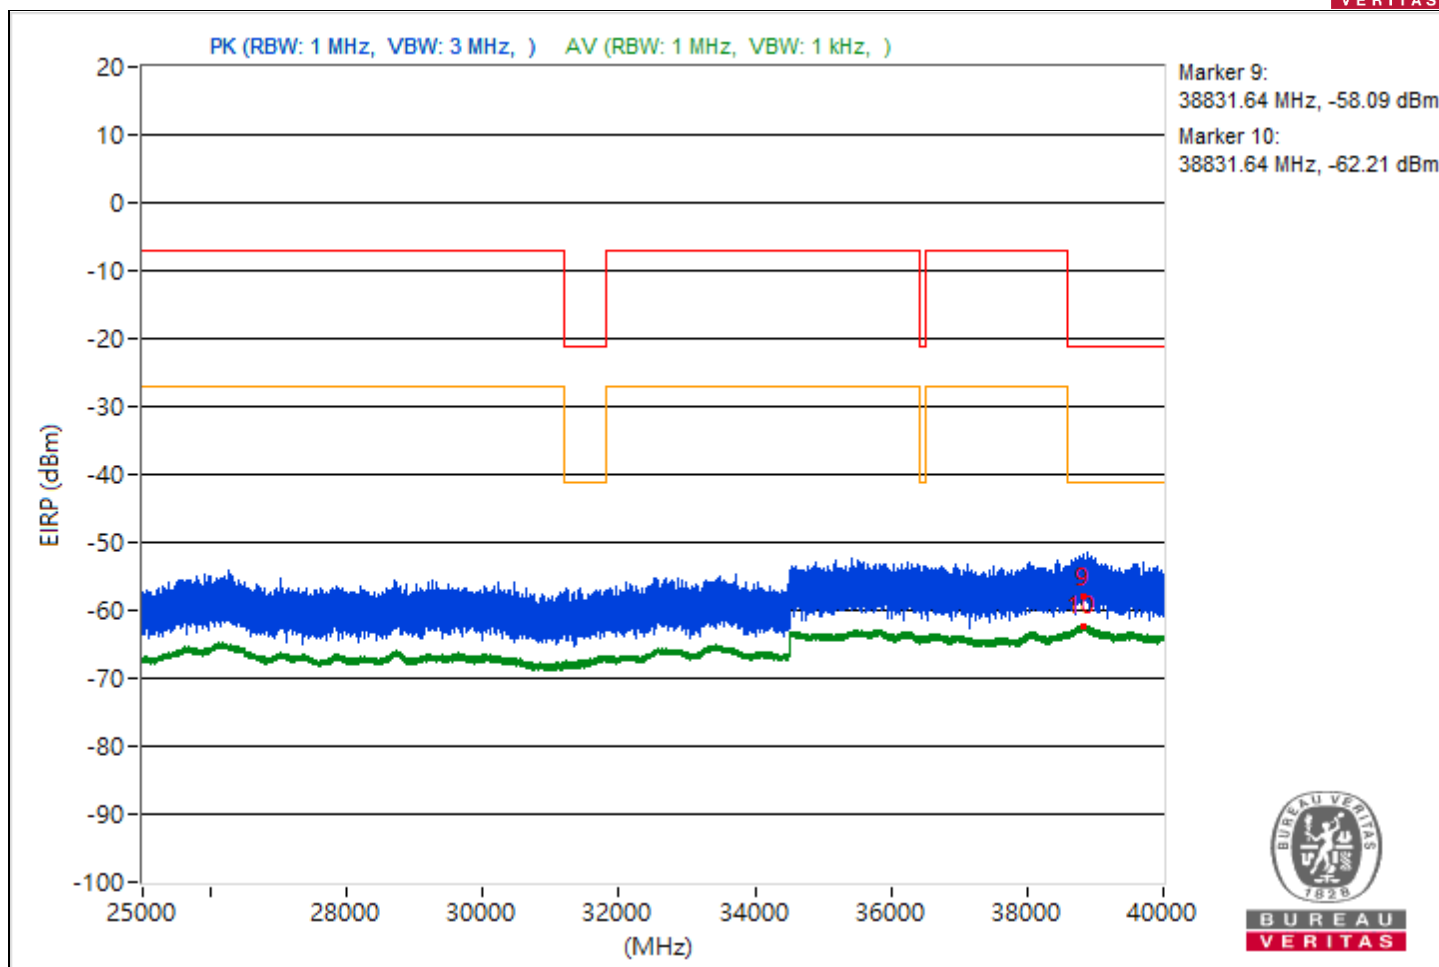


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3822.56	46.33 PK	74	-27.67	-56.75	-56.97	4.92	-48.93
2	3822.56	37.23 AV	54	-16.77	-65.75	-66.17	4.92	-58.03
3	14484.89	44.36 PK	74	-29.64	-58.87	-58.78	4.92	-50.9
4	14484.89	36.34 AV	54	-17.66	-66.68	-67.04	4.92	-58.92
5	21122.7	47.15 PK	74	-26.85	-56.19	-55.89	4.92	-48.11
6	21122.7	38.17 AV	54	-15.83	-65.31	-64.74	4.92	-57.09
7	23655.6	44.95 PK	74	-29.05	-57.85	-58.67	4.92	-50.31
8	23655.6	39.44 AV	54	-14.56	-63.56	-63.95	4.92	-55.82
9	38815.91	38.45 PK	74	-35.55	-63.98	-65.65	4.92	-56.81
10	38815.91	32.98 AV	54	-21.02	-70.62	-69.84	4.92	-62.28

Note: Margin value = Emission Level - Limit value

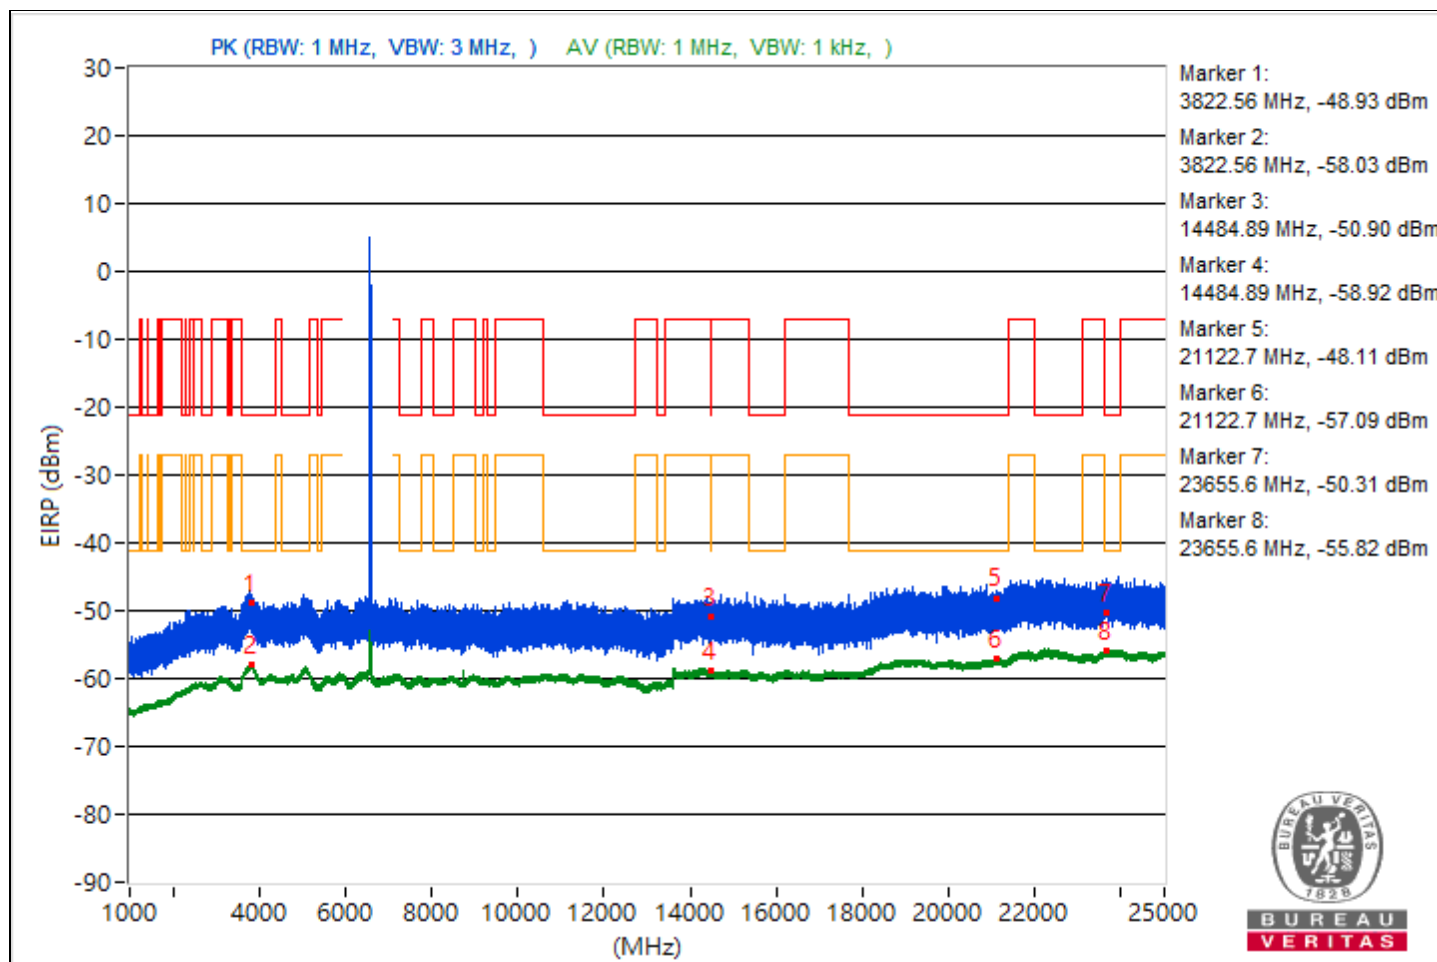


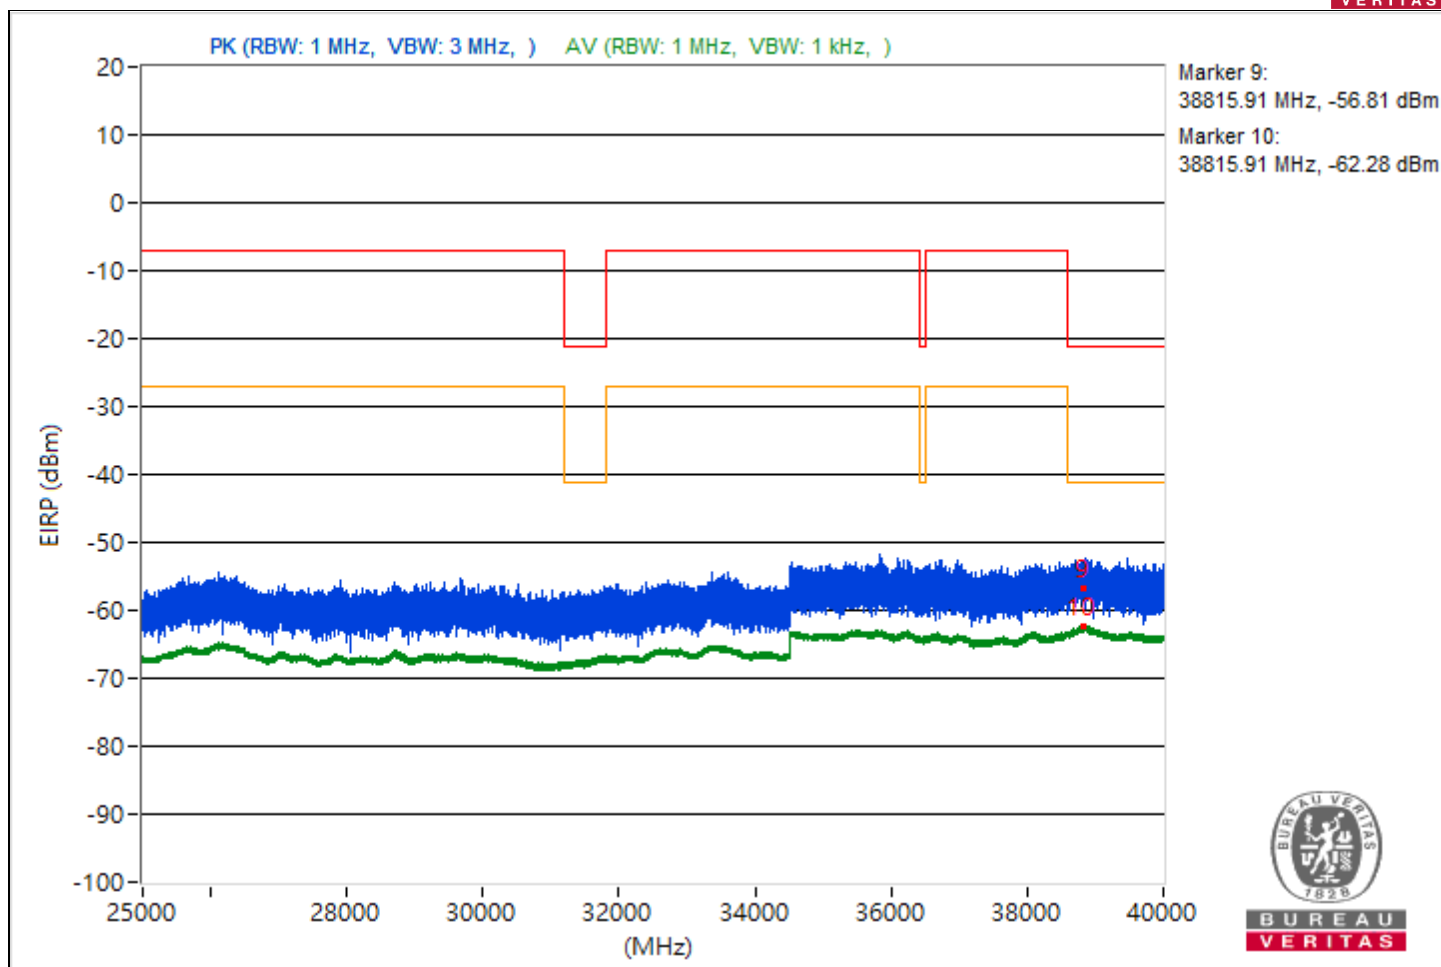


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3781.72	45.32 PK	74	-28.68	-58.52	-57.31	4.92	-49.94
2	3781.72	37.29 AV	54	-16.71	-65.74	-66.07	4.92	-57.97
3	14472.89	43.2 PK	74	-30.8	-59.56	-60.48	4.92	-52.06
4	14472.89	36.5 AV	54	-17.5	-66.68	-66.7	4.92	-58.76
5	21119.8	45.7 PK	74	-28.3	-58.66	-56.57	4.92	-49.56
6	21119.8	38.13 AV	54	-15.87	-65.41	-64.73	4.92	-57.13
7	23759.4	47.2 PK	74	-26.8	-57.05	-55.14	4.92	-48.06
8	23759.4	39.53 AV	54	-14.47	-63.96	-63.37	4.92	-55.73
9	38832.98	37.85 PK	74	-36.15	-64.85	-65.89	4.92	-57.41
10	38832.98	33.01 AV	54	-20.99	-70.6	-69.79	4.92	-62.25

Note: Margin value = Emission Level - Limit value

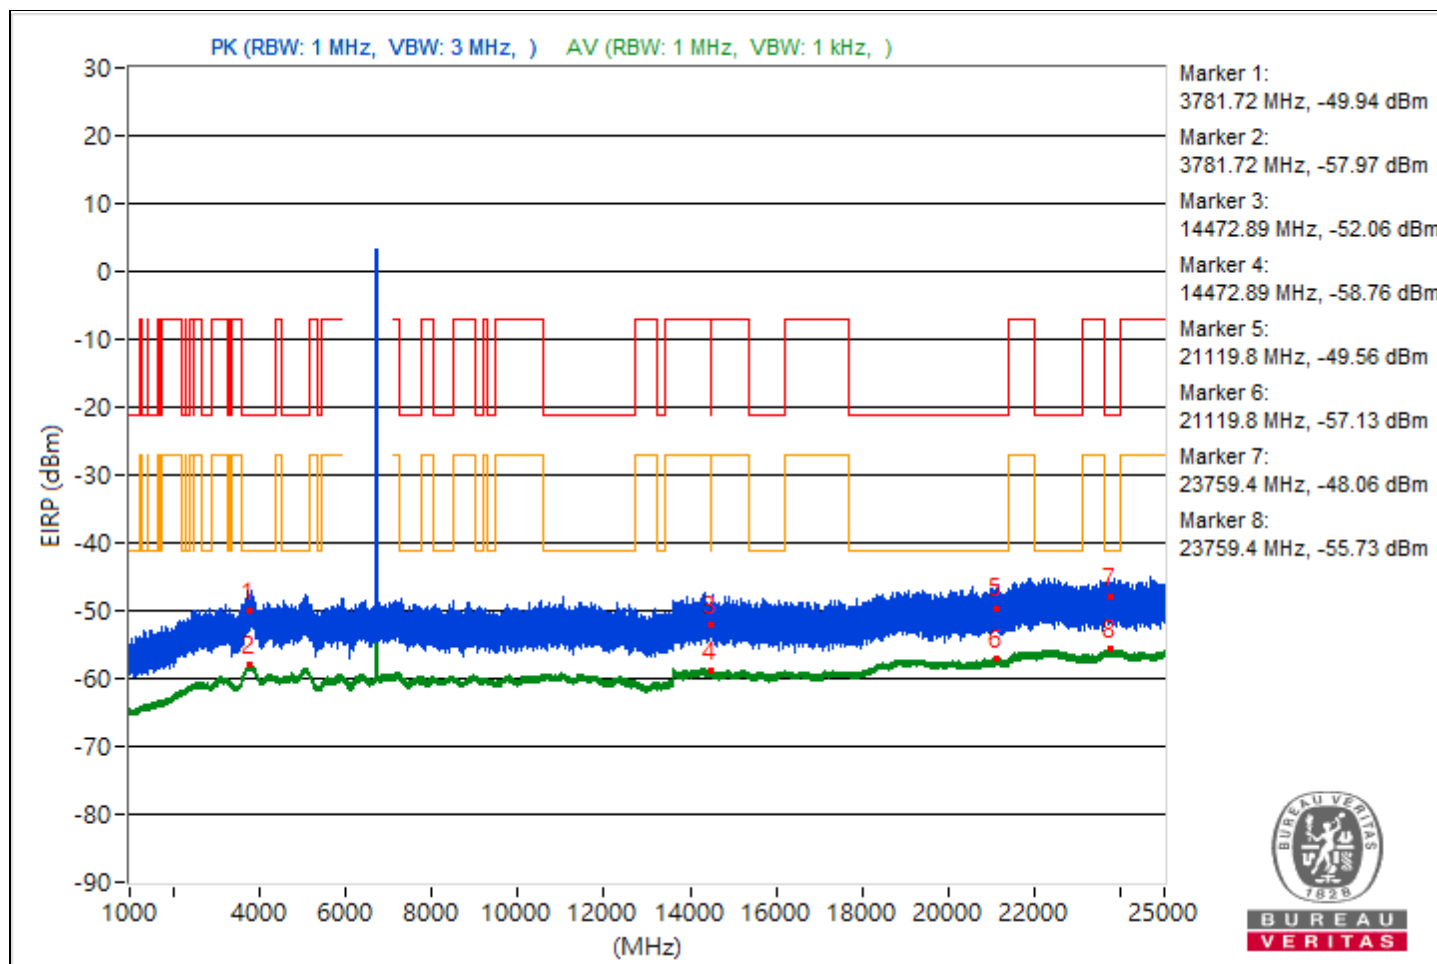


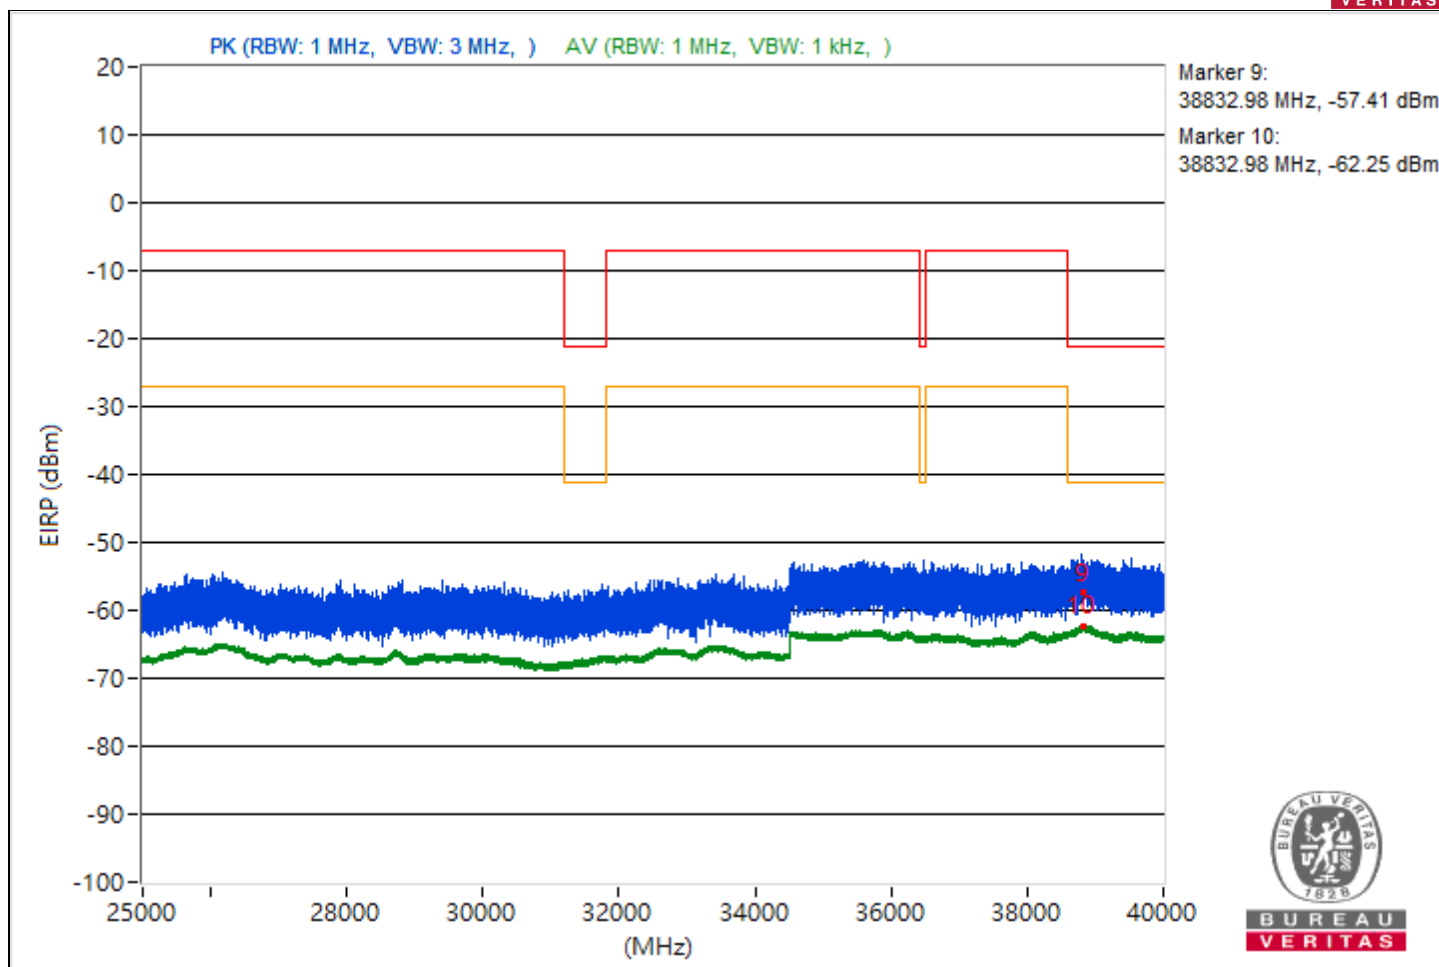


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.16	44.61 PK	74	-29.39	-59.61	-57.76	4.92	-50.65
2	3821.16	37.4 AV	54	-16.6	-66.2	-65.42	4.92	-57.86
3	14473.16	42.39 PK	74	-31.61	-62.58	-59.54	4.92	-52.87
4	14473.16	36.52 AV	54	-17.48	-66.4	-66.95	4.92	-58.74
5	21019.1	44.14 PK	74	-29.86	-60.43	-58.01	4.92	-51.12
6	21019.1	38 AV	54	-16	-65.75	-64.7	4.92	-57.26
7	23844.3	47.39 PK	74	-26.61	-54.62	-57.42	4.92	-47.87
8	23844.3	39.38 AV	54	-14.62	-64.23	-63.43	4.92	-55.88
9	38833.78	38.63 PK	74	-35.37	-63.54	-65.9	4.92	-56.63
10	38833.78	32.97 AV	54	-21.03	-70.79	-69.71	4.92	-62.29

Note: Margin value = Emission Level - Limit value

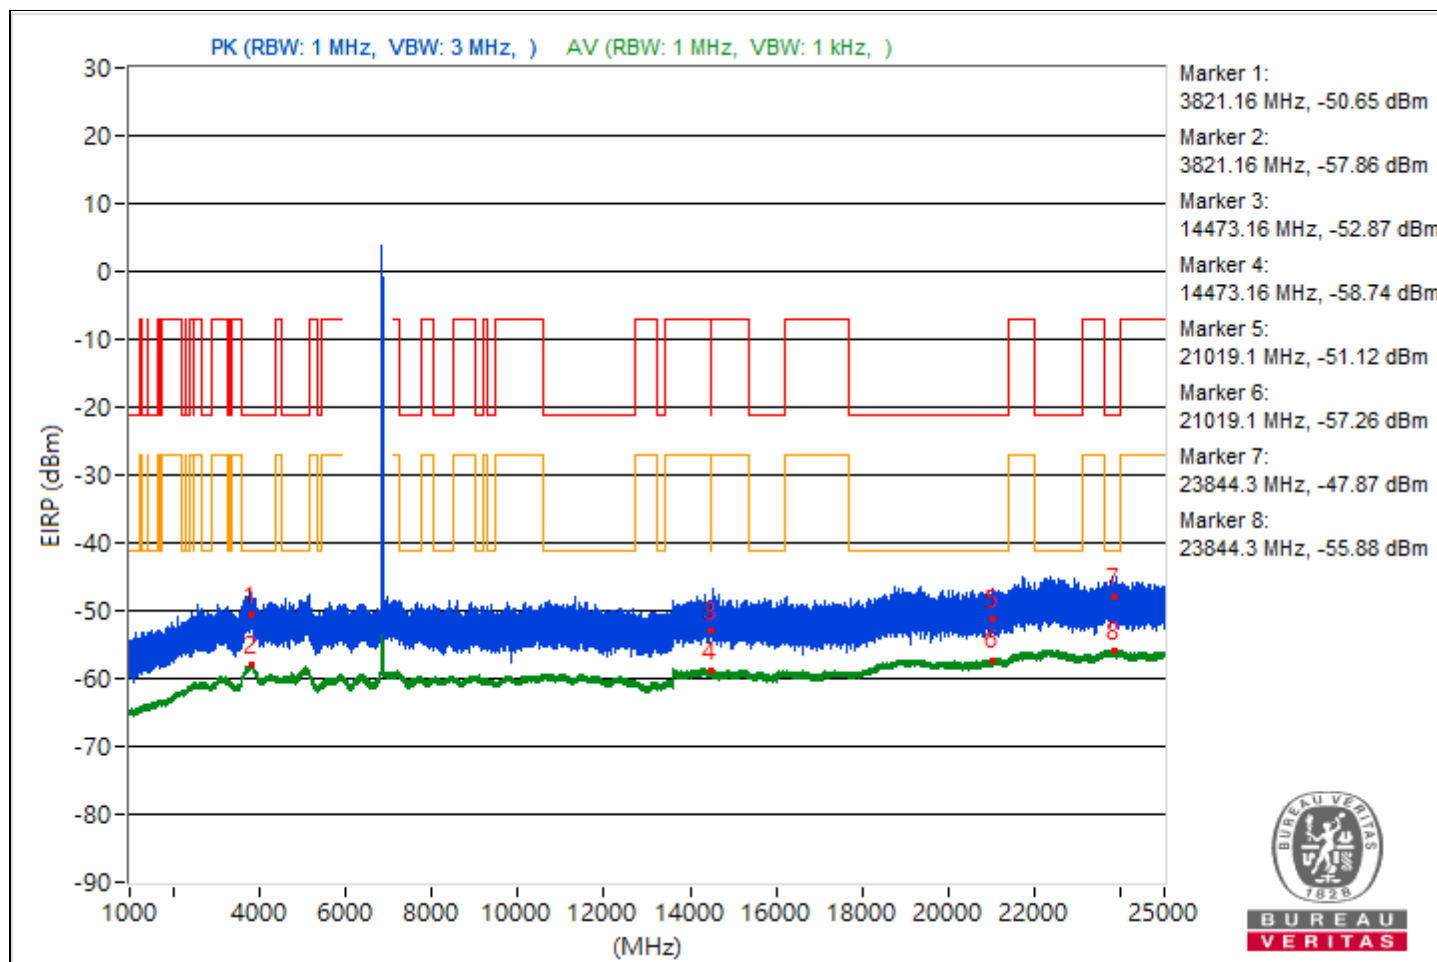


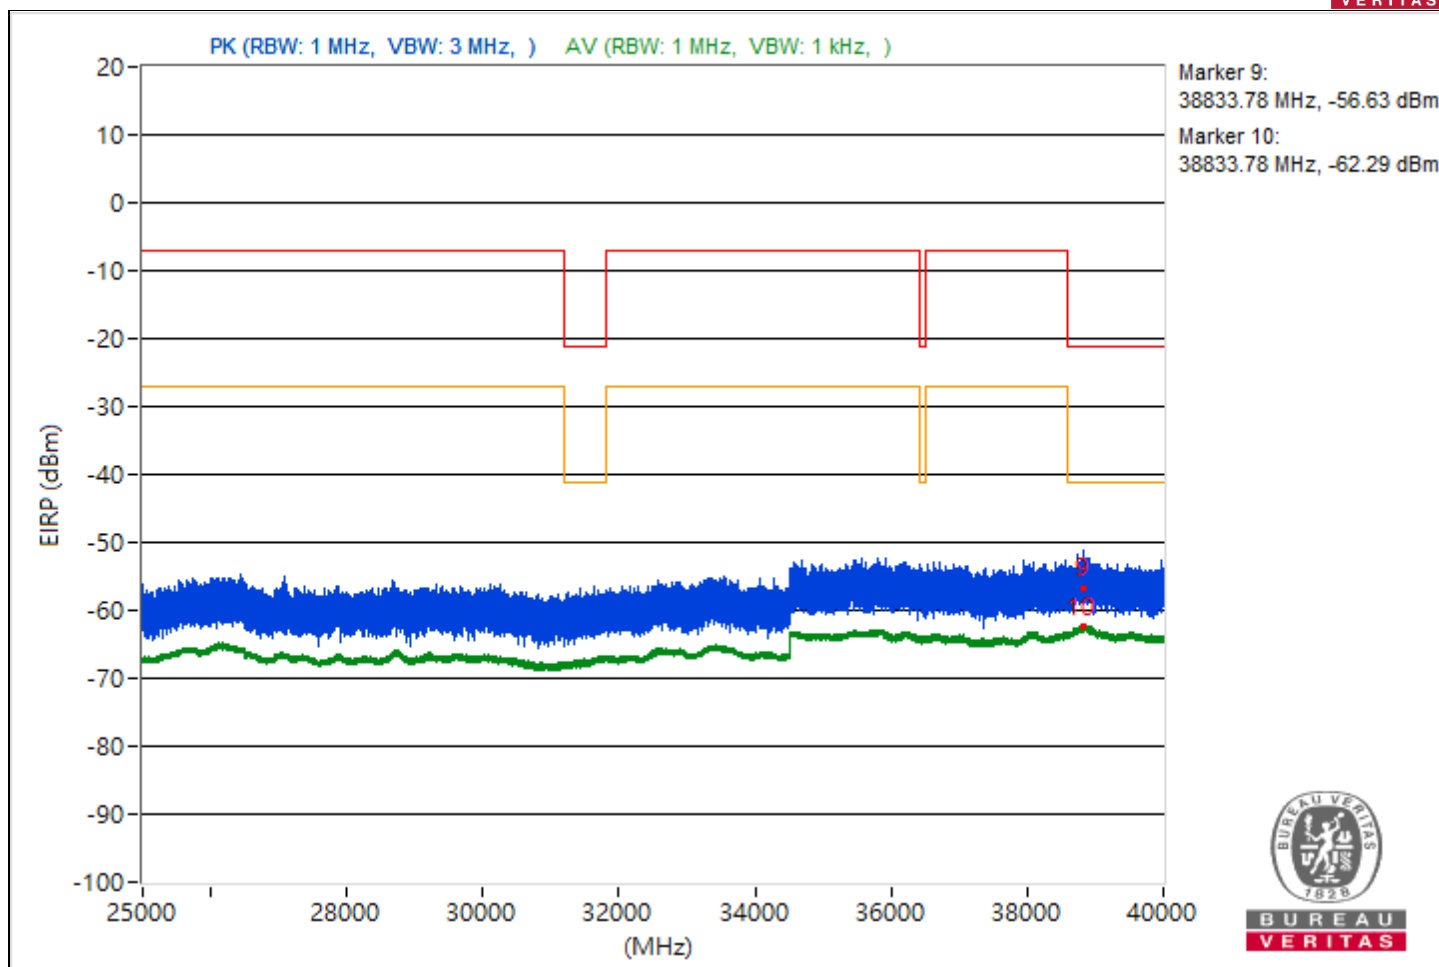


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.08	45.04 PK	74	-28.96	-58.28	-58.03	4.92	-50.22
2	3814.08	37.43 AV	54	-16.57	-66.18	-65.38	4.92	-57.83
3	14495.82	45.79 PK	74	-28.21	-56.23	-59.01	4.92	-49.47
4	14495.82	36.34 AV	54	-17.66	-67.29	-66.46	4.92	-58.92
5	21086.3	45.52 PK	74	-28.48	-56.51	-59.27	4.92	-49.74
6	21086.3	38.19 AV	54	-15.81	-65.54	-64.53	4.92	-57.07
7	23882	46.16 PK	74	-27.84	-57.07	-56.99	4.92	-49.1
8	23882	39.55 AV	54	-14.45	-63.29	-64.02	4.92	-55.71
9	38874.93	39.87 PK	74	-34.13	-65.55	-61.85	4.92	-55.39
10	38874.93	33.04 AV	54	-20.96	-70.63	-69.71	4.92	-62.22

Note: Margin value = Emission Level - Limit value

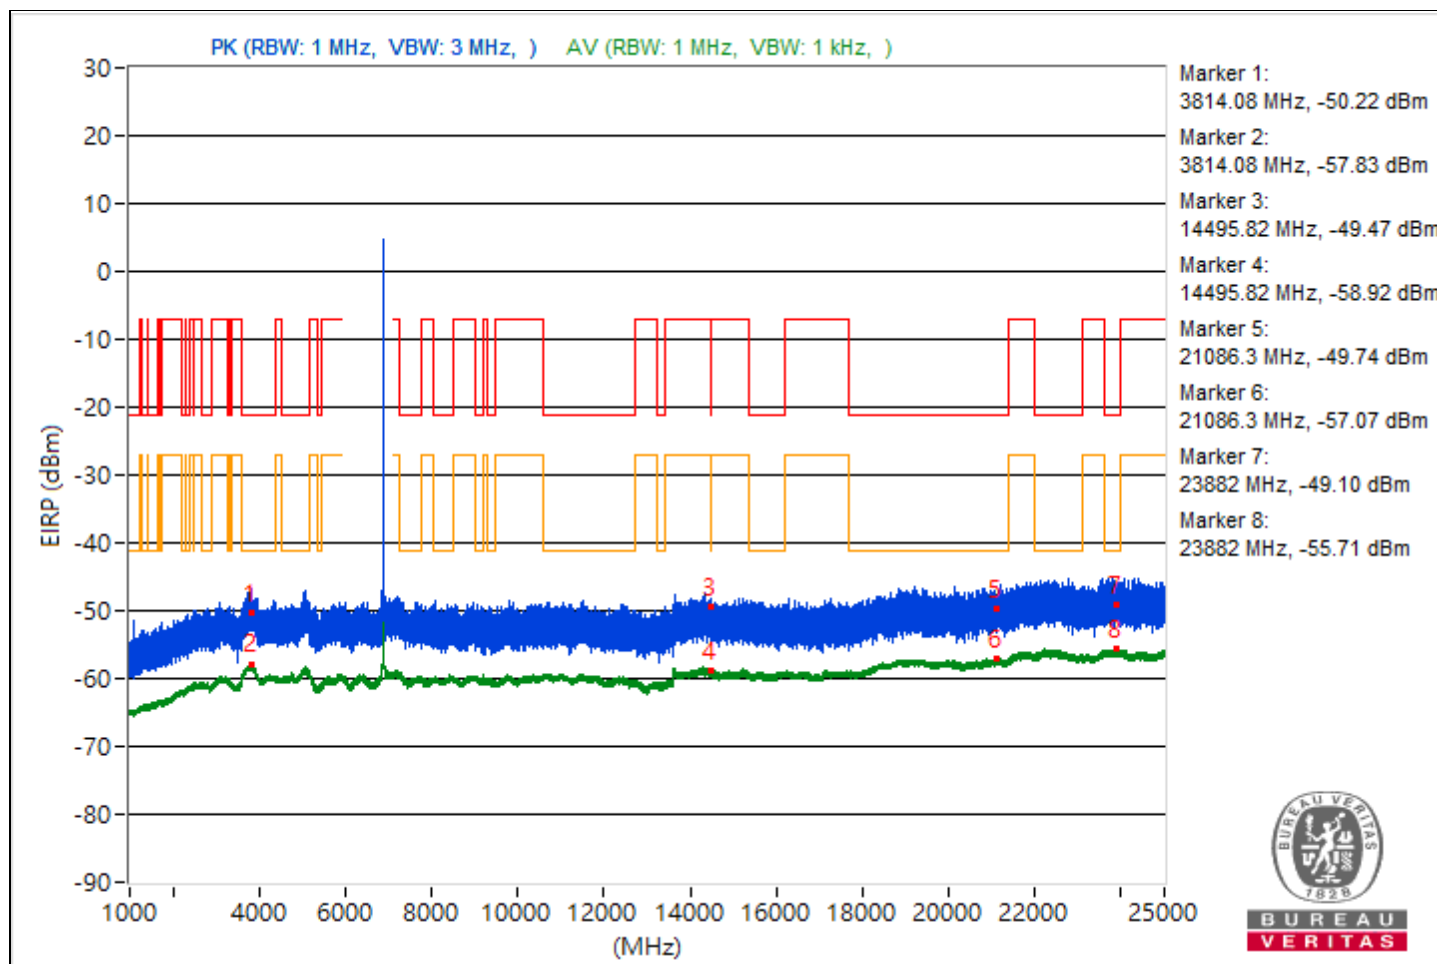


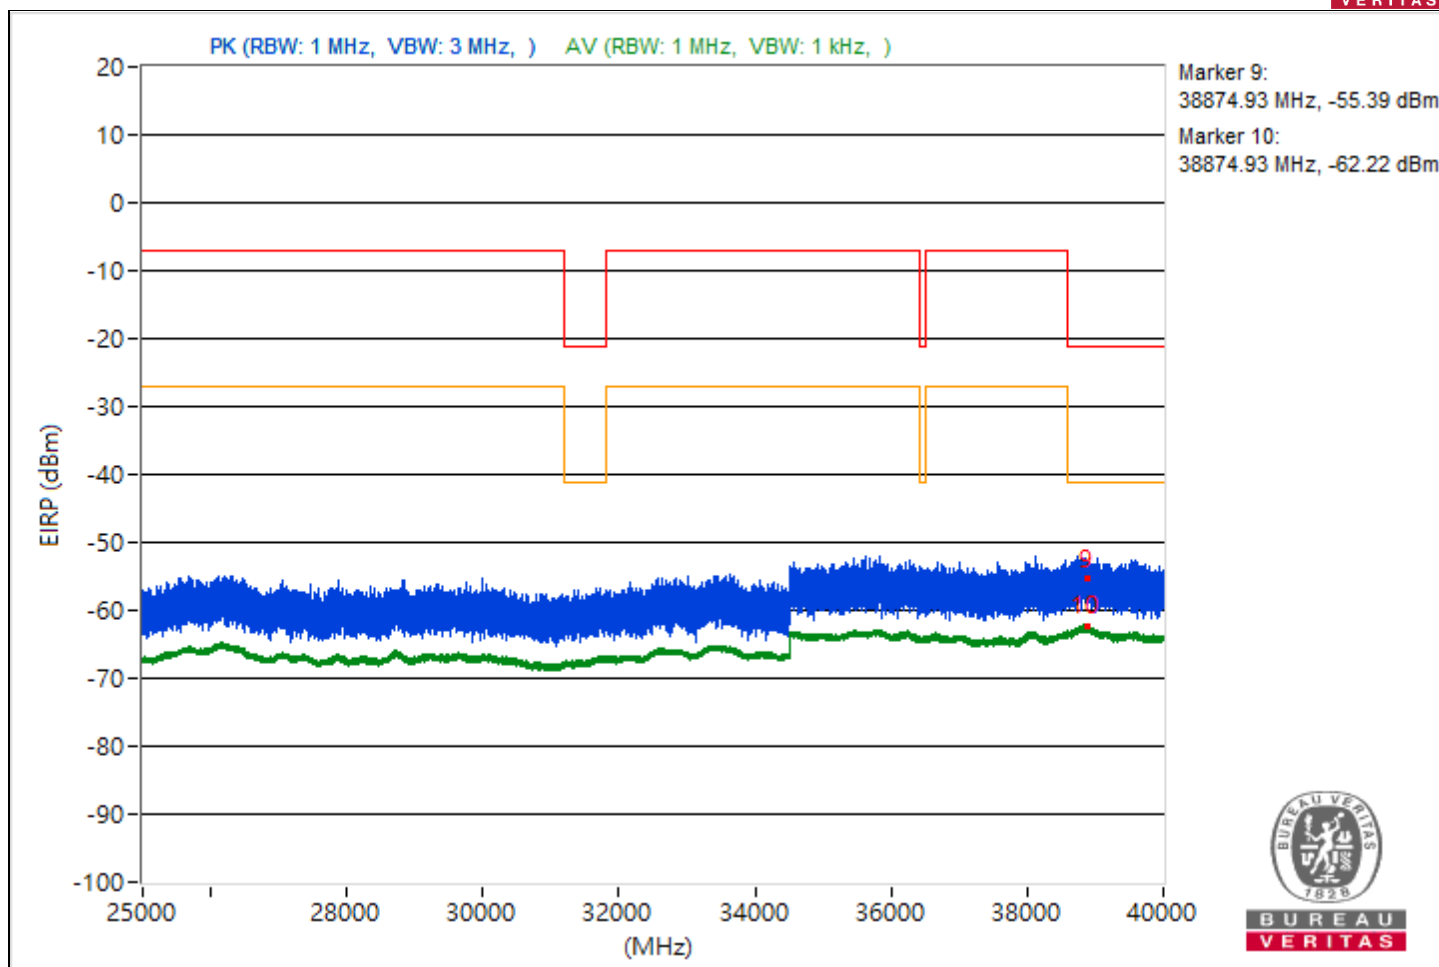


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.98	46.61 PK	74	-27.39	-56.1	-57.13	4.92	-48.65
2	3790.98	37.45 AV	54	-16.55	-65.72	-65.76	4.92	-57.81
3	7255.98	43.96 PK	74	-30.04	-58.87	-59.62	4.92	-51.3
4	7255.98	36.67 AV	54	-17.33	-66.42	-66.62	4.92	-58.59
5	21154.9	44.9 PK	74	-29.1	-56.92	-60.3	4.92	-50.36
6	21154.9	38.11 AV	54	-15.89	-65.46	-64.74	4.92	-57.15
7	23810.1	45.53 PK	74	-28.47	-57.5	-57.81	4.92	-49.73
8	23810.1	39.5 AV	54	-14.5	-63.56	-63.83	4.92	-55.76
9	38833.16	40.92 PK	74	-33.08	-65.47	-60.44	4.92	-54.34
10	38833.16	33.15 AV	54	-20.85	-70.06	-70.02	4.92	-62.11

Note: Margin value = Emission Level - Limit value

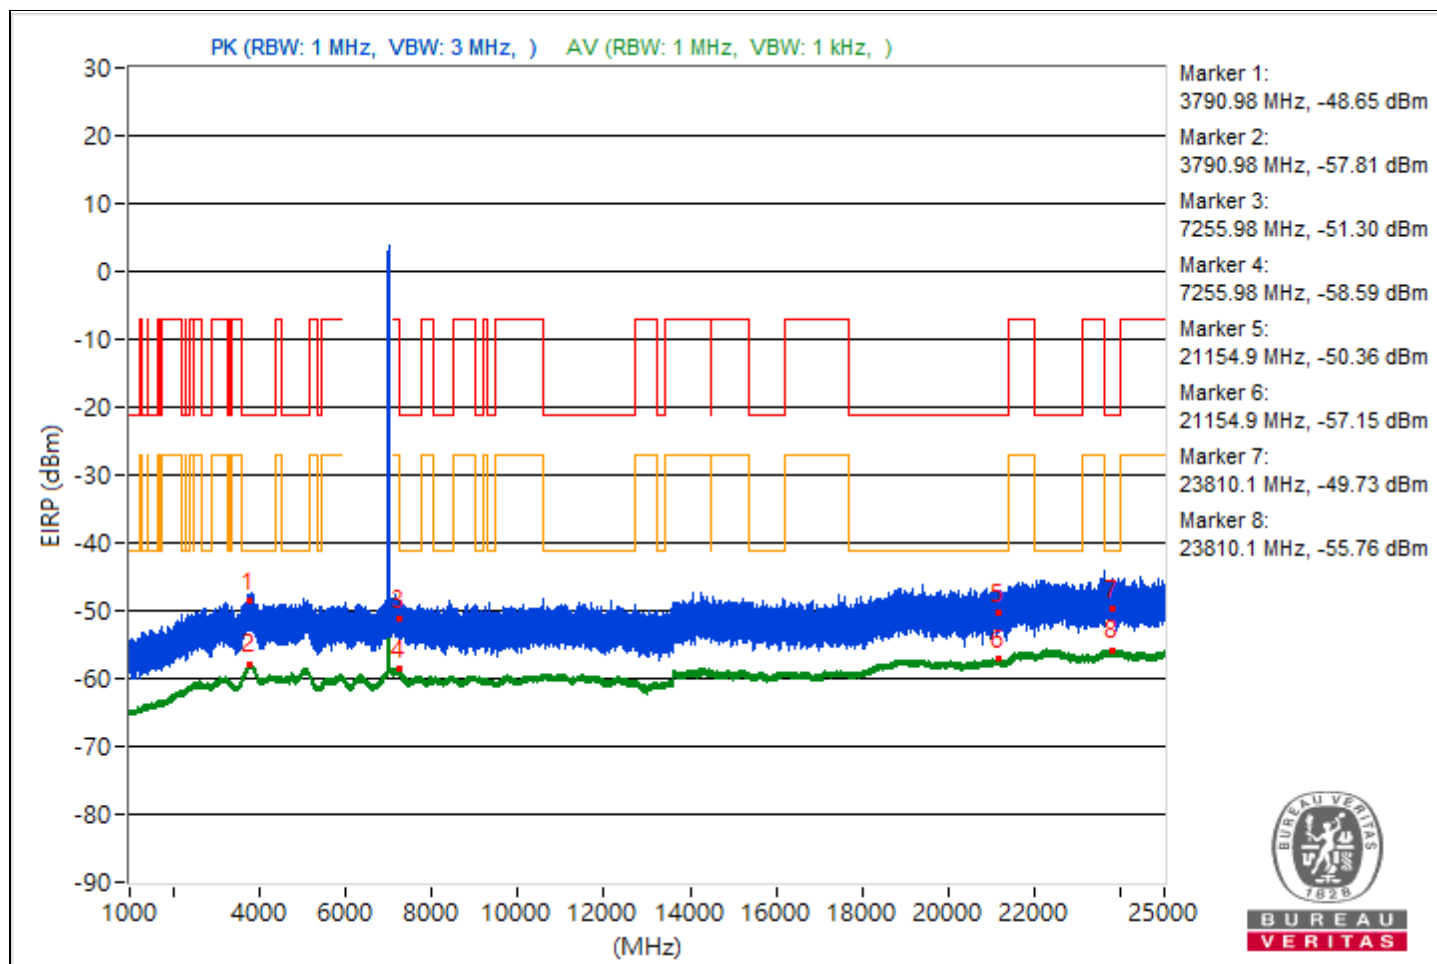


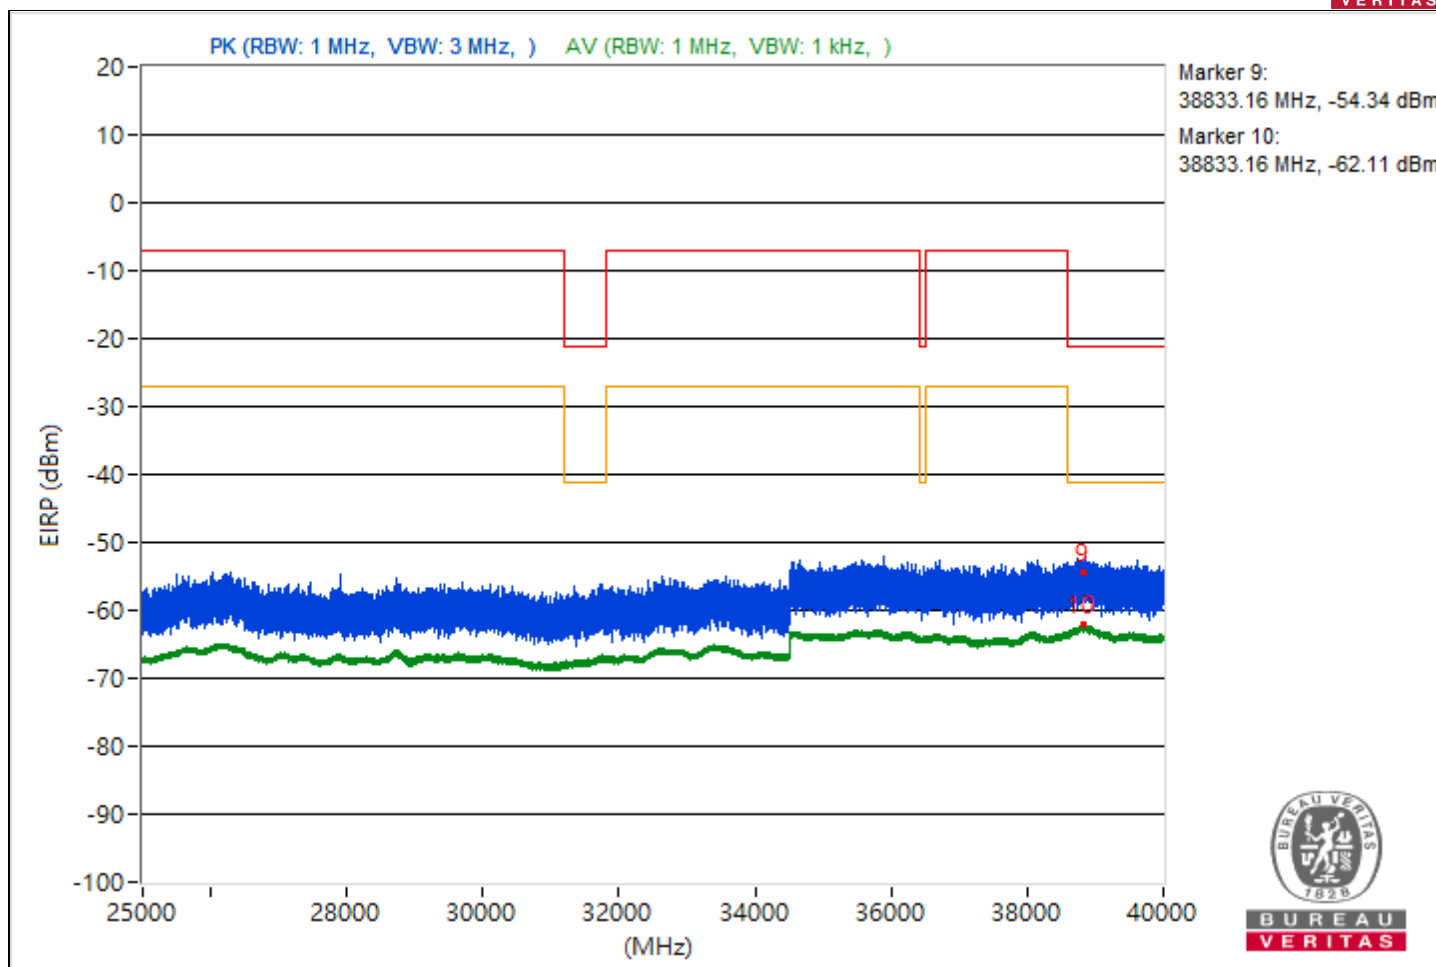


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.27	45.07 PK	74	-28.93	-59.2	-57.26	4.92	-50.19
2	3789.27	37.35 AV	54	-16.65	-66.2	-65.51	4.92	-57.91
3	7261.19	42.59 PK	74	-31.41	-60.93	-60.3	4.92	-52.67
4	7261.19	36.89 AV	54	-17.11	-66.53	-66.08	4.92	-58.37
5	21098.5	44.65 PK	74	-29.35	-57.76	-59.51	4.92	-50.61
6	21098.5	38.14 AV	54	-15.86	-64.78	-65.34	4.92	-57.12
7	23804.6	45.61 PK	74	-28.39	-55.94	-60.25	4.92	-49.65
8	23804.6	39.49 AV	54	-14.51	-63.44	-63.98	4.92	-55.77
9	38838.84	37.75 PK	74	-36.25	-66.01	-64.93	4.92	-57.51
10	38838.84	32.93 AV	54	-21.07	-70.03	-70.5	4.92	-62.33

Note: Margin value = Emission Level - Limit value

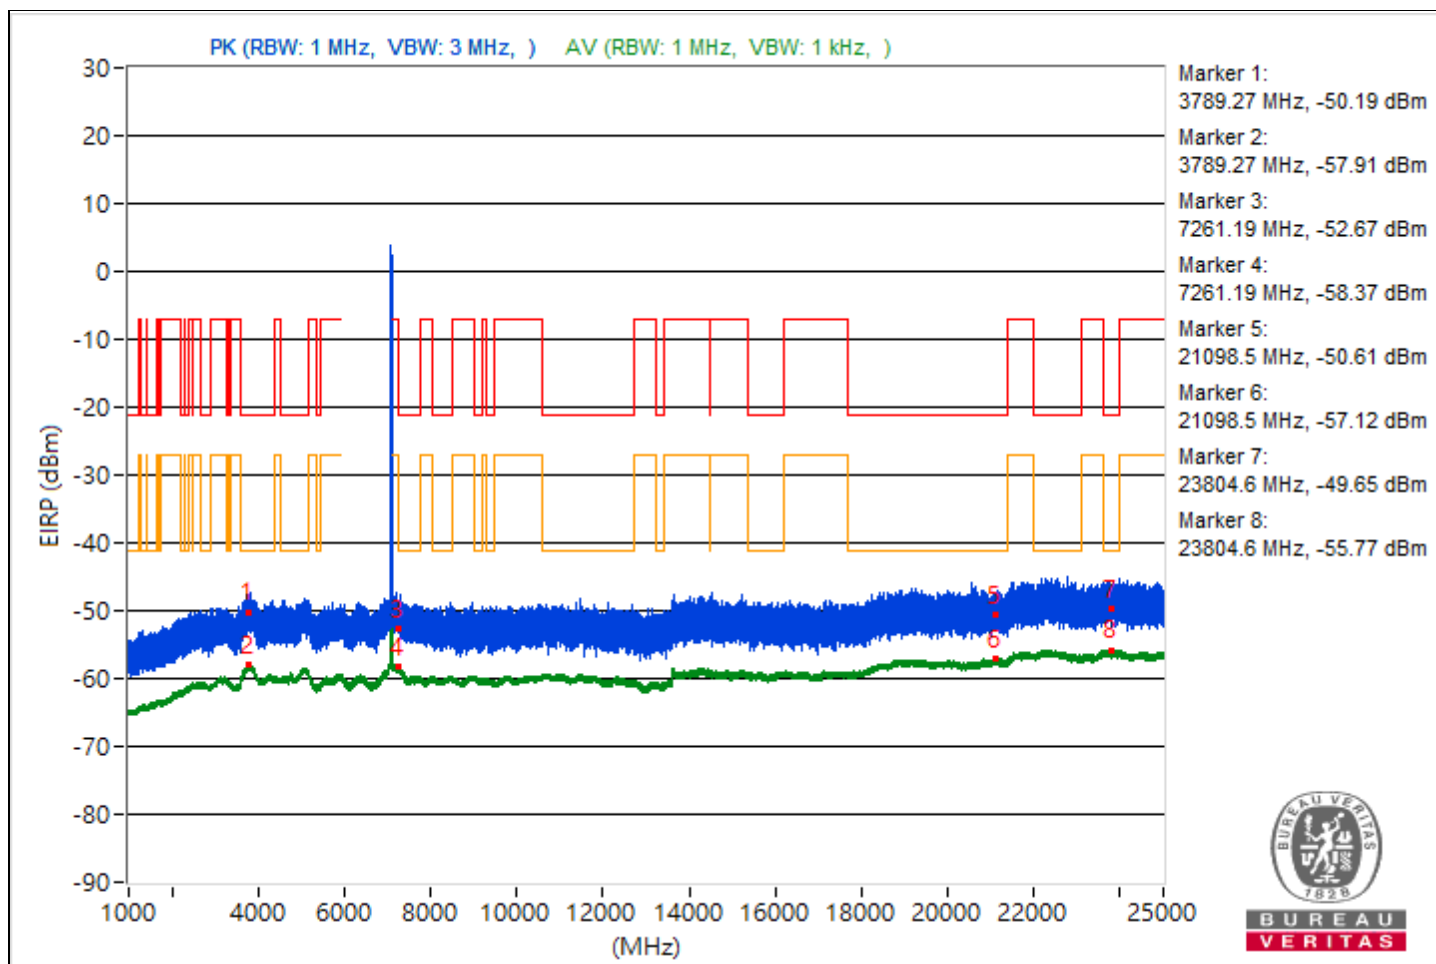


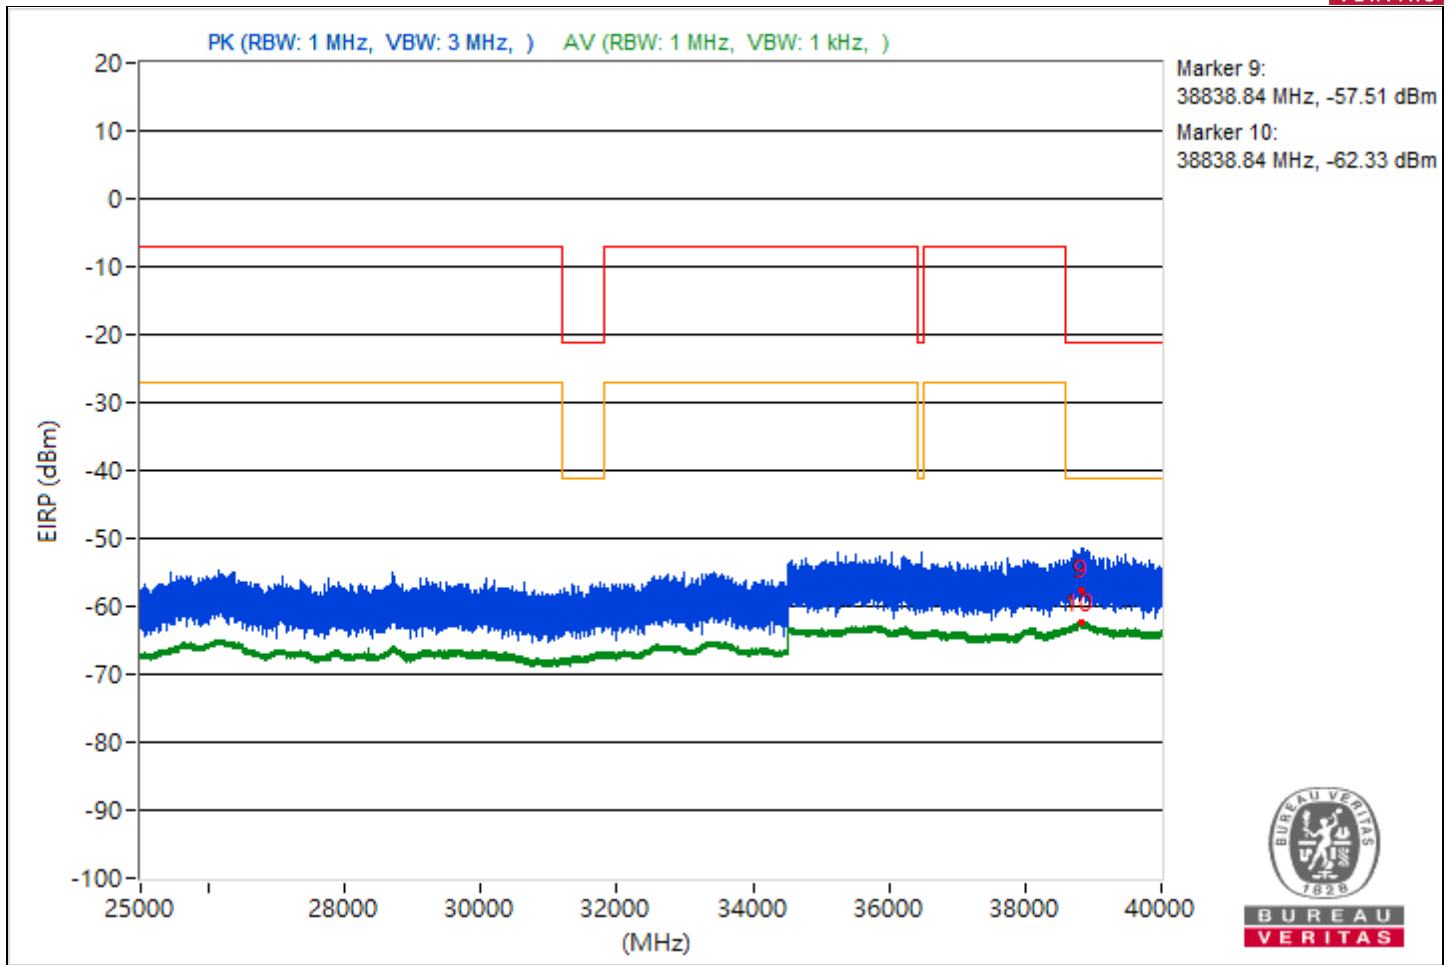


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.83	45.75 PK	74	-28.25	-56.47	-58.69	4.92	-49.51
2	3798.83	37.28 AV	54	-16.72	-65.77	-66.06	4.92	-57.98
3	14475.47	43.42 PK	74	-30.58	-58.26	-62.1	4.92	-51.84
4	14475.47	36.36 AV	54	-17.64	-67.09	-66.58	4.92	-58.9
5	21399.9	44.98 PK	74	-29.02	-58.58	-57.88	4.92	-50.28
6	21399.9	38.09 AV	54	-15.91	-65.54	-64.7	4.92	-57.17
7	22257.9	46.43 PK	74	-27.57	-55.75	-58.08	4.92	-48.83
8	22257.9	39.29 AV	54	-14.71	-63.44	-64.42	4.92	-55.97
9	38809.96	39.4 PK	74	-34.6	-65.11	-62.78	4.92	-55.86
10	38809.96	33.09 AV	54	-20.91	-70.01	-70.2	4.92	-62.17

Note: Margin value = Emission Level - Limit value

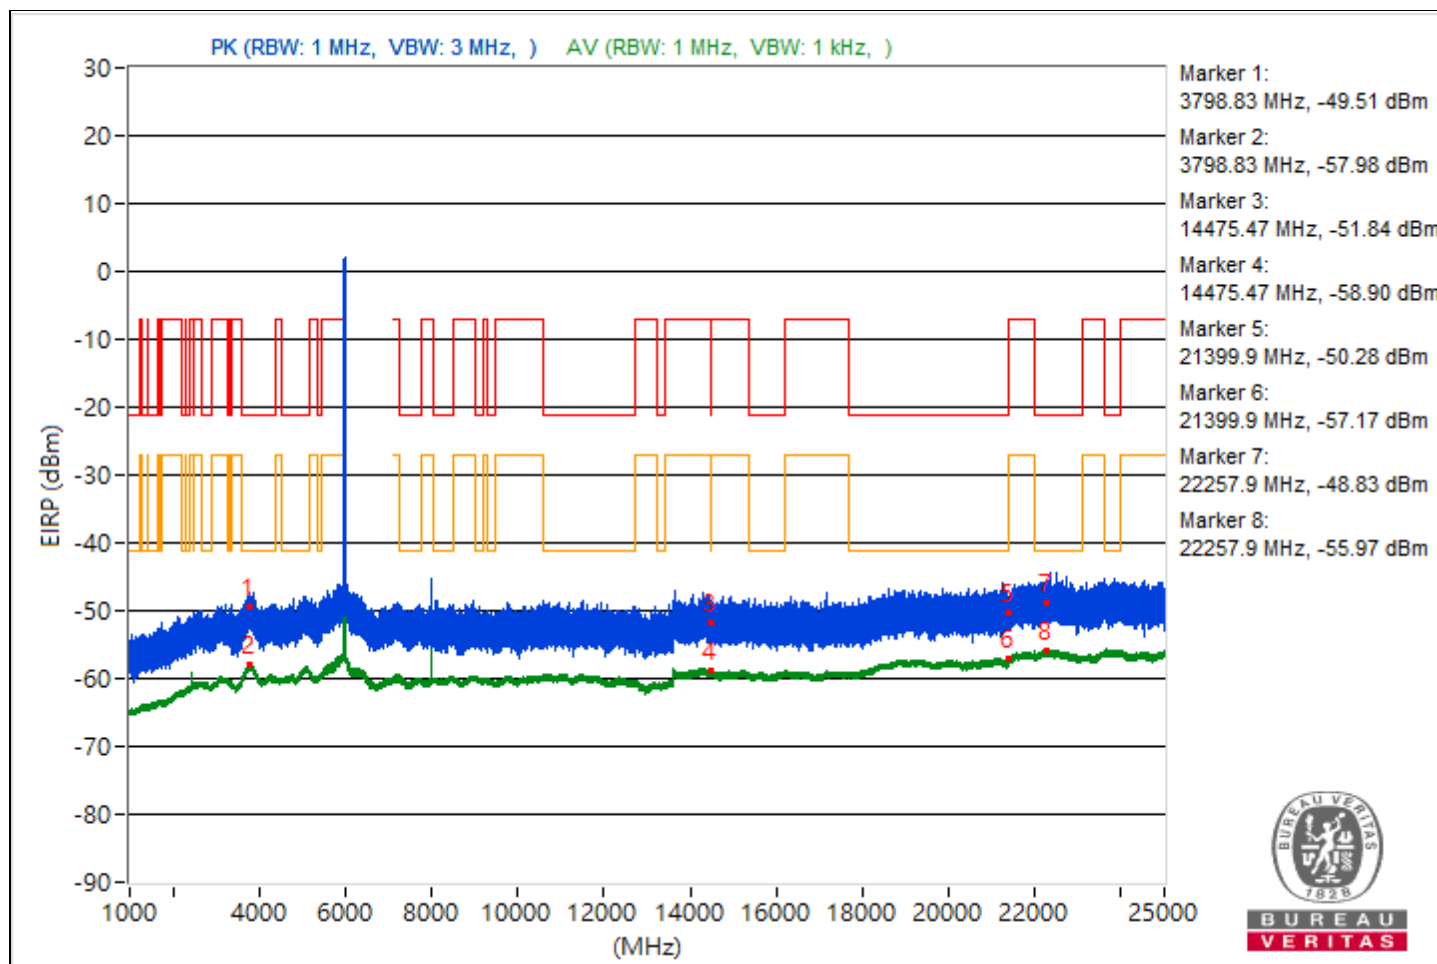


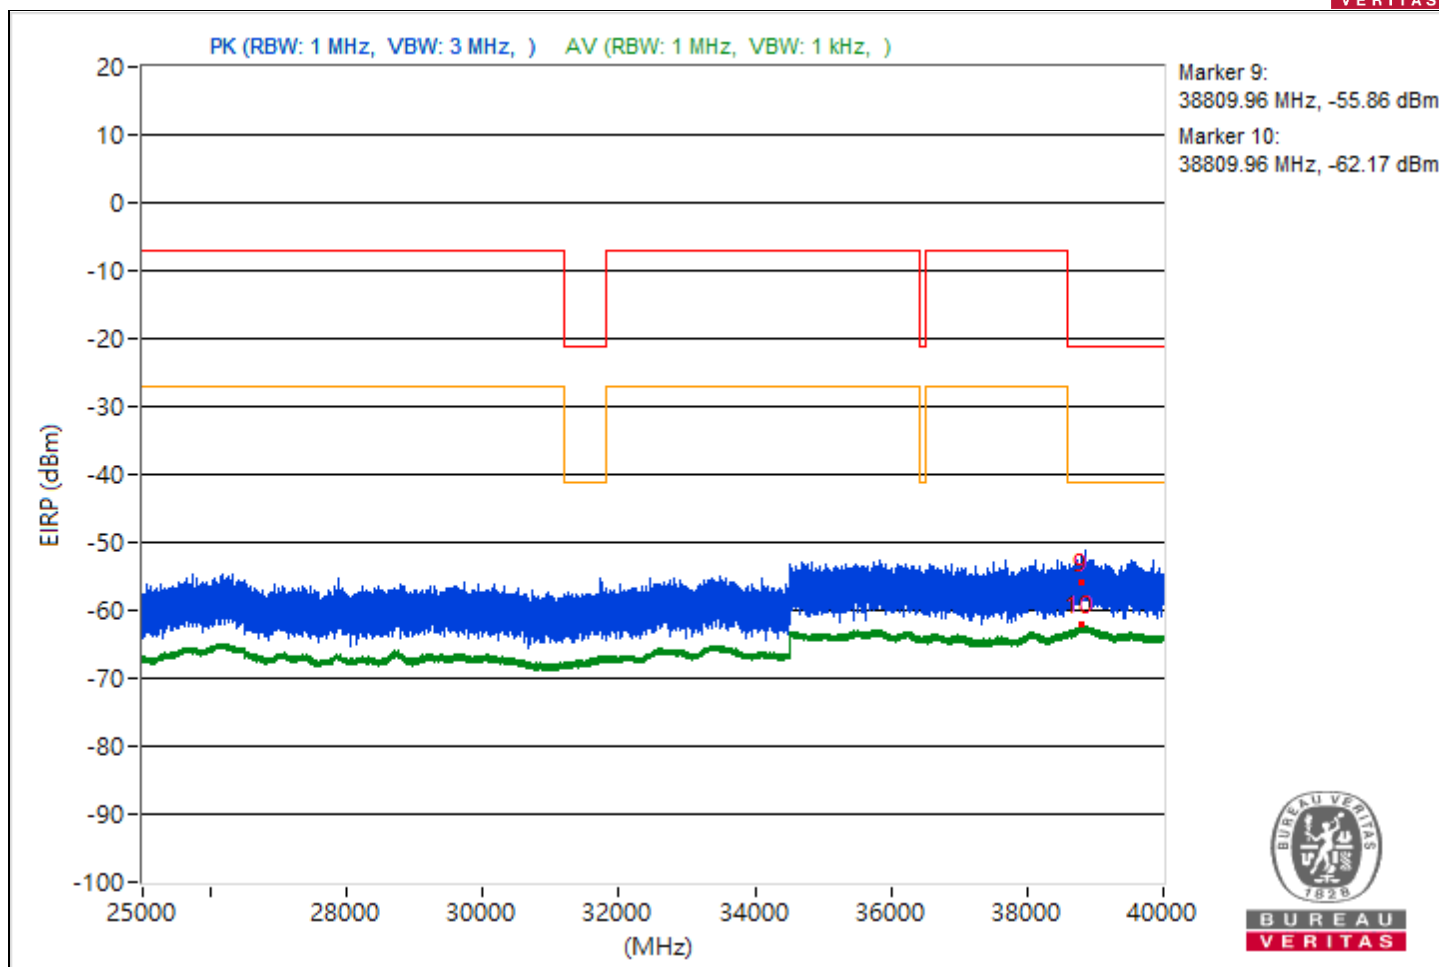


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.53	46.59 PK	74	-27.41	-55.21	-58.66	4.92	-48.67
2	3806.53	37.35 AV	54	-16.65	-66.12	-65.57	4.92	-57.91
3	8193.33	49.34 PK	74	-24.66	-51.62	-58.69	4.92	-45.92
4	8193.33	44.49 AV	54	-9.51	-55.98	-67.68	4.92	-50.77
5	21364.3	44.57 PK	74	-29.43	-60.8	-57.18	4.92	-50.69
6	21364.3	38.1 AV	54	-15.9	-65.49	-64.72	4.92	-57.16
7	23808.9	45.81 PK	74	-28.19	-57.07	-57.72	4.92	-49.45
8	23808.9	39.39 AV	54	-14.61	-64.3	-63.36	4.92	-55.87
9	38849.51	40.51 PK	74	-33.49	-62.57	-62.79	4.92	-54.75
10	38849.51	33.01 AV	54	-20.99	-70.1	-70.27	4.92	-62.25

Note: Margin value = Emission Level - Limit value

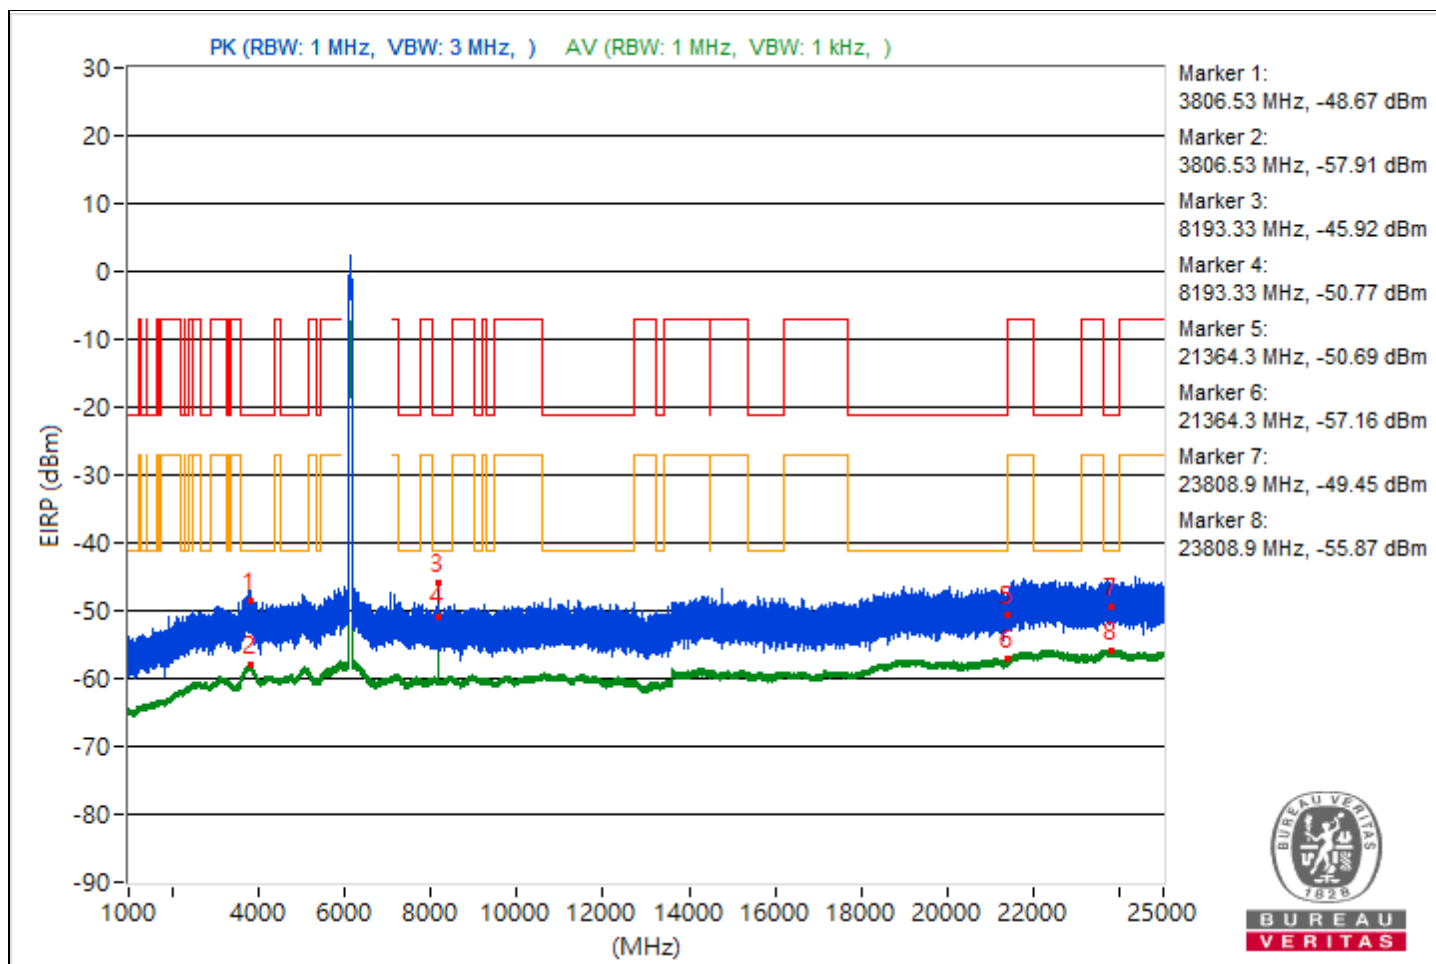


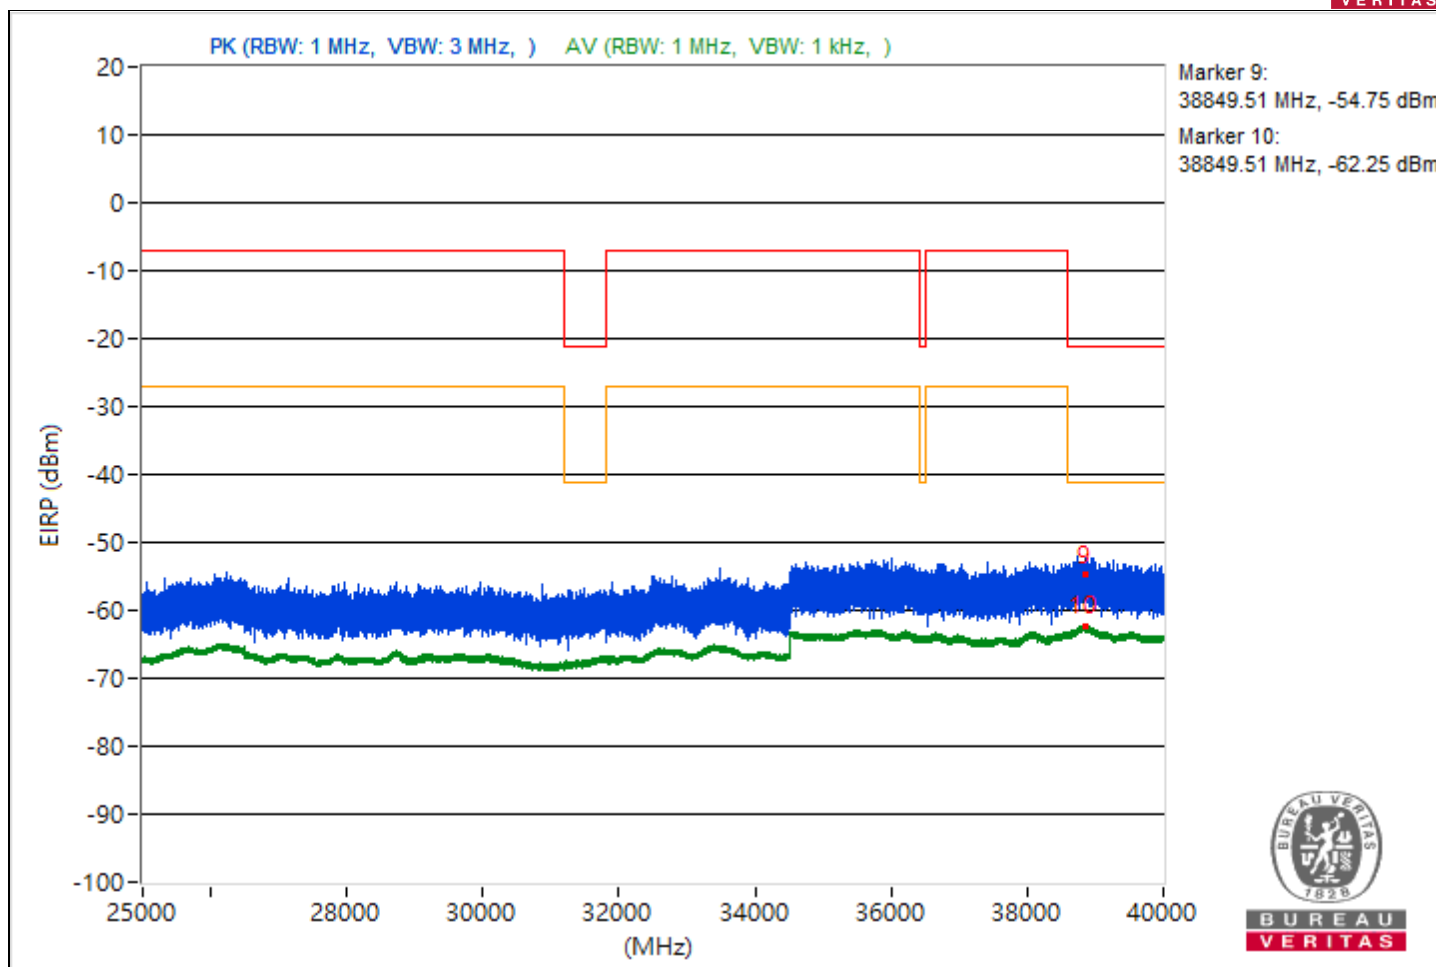


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.68	45.08 PK	74	-28.92	-57.31	-59.1	4.92	-50.18
2	3805.68	37.49 AV	54	-16.51	-65.84	-65.57	4.92	-57.77
3	14495.82	44.57 PK	74	-29.43	-61.33	-56.96	4.92	-50.69
4	14495.82	36.38 AV	54	-17.62	-67.19	-66.47	4.92	-58.88
5	21047.8	44.8 PK	74	-29.2	-57.23	-59.97	4.92	-50.46
6	21047.8	38.03 AV	54	-15.97	-64.84	-65.5	4.92	-57.23
7	23739.5	44.85 PK	74	-29.15	-58.95	-57.8	4.92	-50.41
8	23739.5	39.45 AV	54	-14.55	-63.29	-64.24	4.92	-55.81
9	38844.8	38.41 PK	74	-35.59	-64.04	-65.68	4.92	-56.85
10	38844.8	32.94 AV	54	-21.06	-70.04	-70.48	4.92	-62.32

Note: Margin value = Emission Level - Limit value

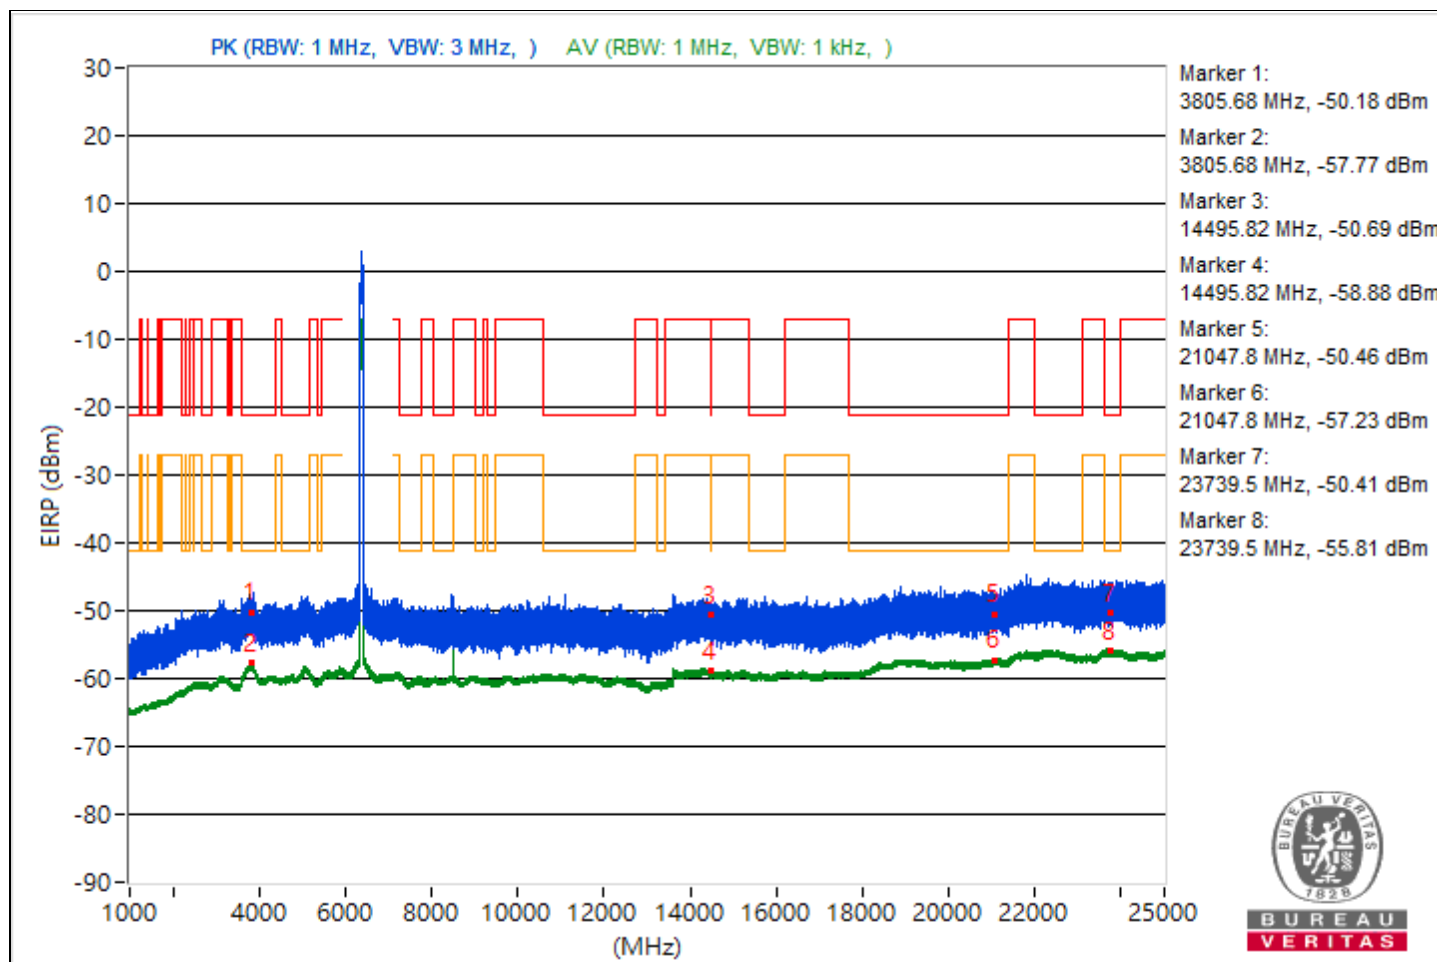


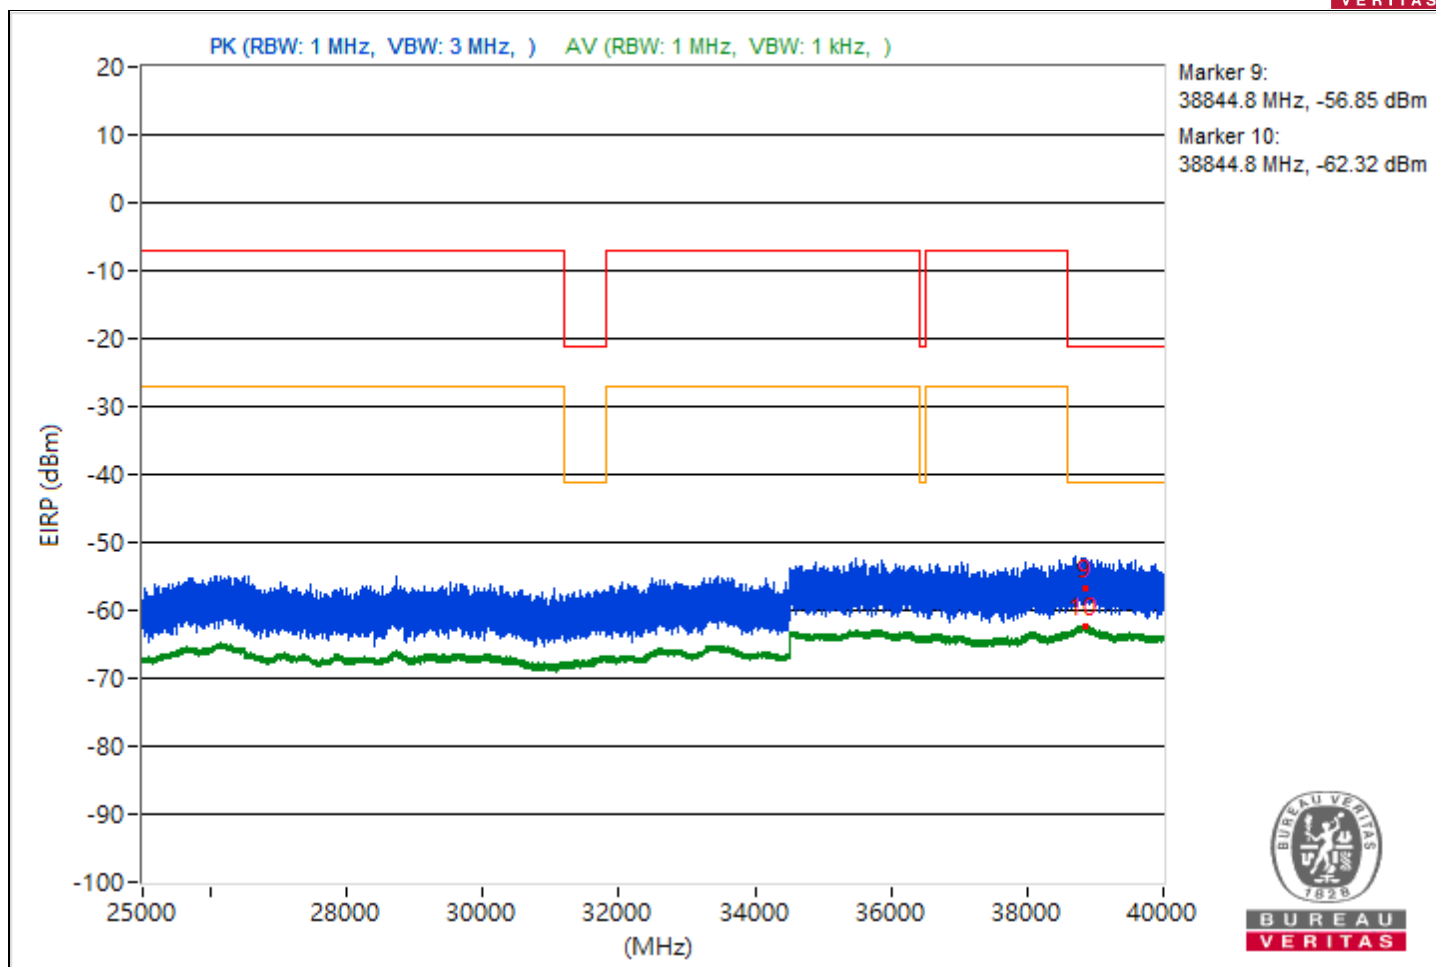


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.79	46.06 PK	74	-27.94	-56.57	-57.77	4.92	-49.2
2	3787.79	37.31 AV	54	-16.69	-66.25	-65.54	4.92	-57.95
3	14488.36	44.13 PK	74	-29.87	-60.65	-57.9	4.92	-51.13
4	14488.36	36.24 AV	54	-17.76	-67.37	-66.57	4.92	-59.02
5	21396.7	45.49 PK	74	-28.51	-57.25	-58.2	4.92	-49.77
6	21396.7	38.17 AV	54	-15.83	-64.83	-65.22	4.92	-57.09
7	22355	46.99 PK	74	-27.01	-57.01	-55.52	4.92	-48.27
8	22355	39.38 AV	54	-14.62	-64.2	-63.45	4.92	-55.88
9	38812.53	40.97 PK	74	-33.03	-63.3	-61.36	4.92	-54.29
10	38812.53	32.96 AV	54	-21.04	-69.74	-70.78	4.92	-62.3

Note: Margin value = Emission Level - Limit value

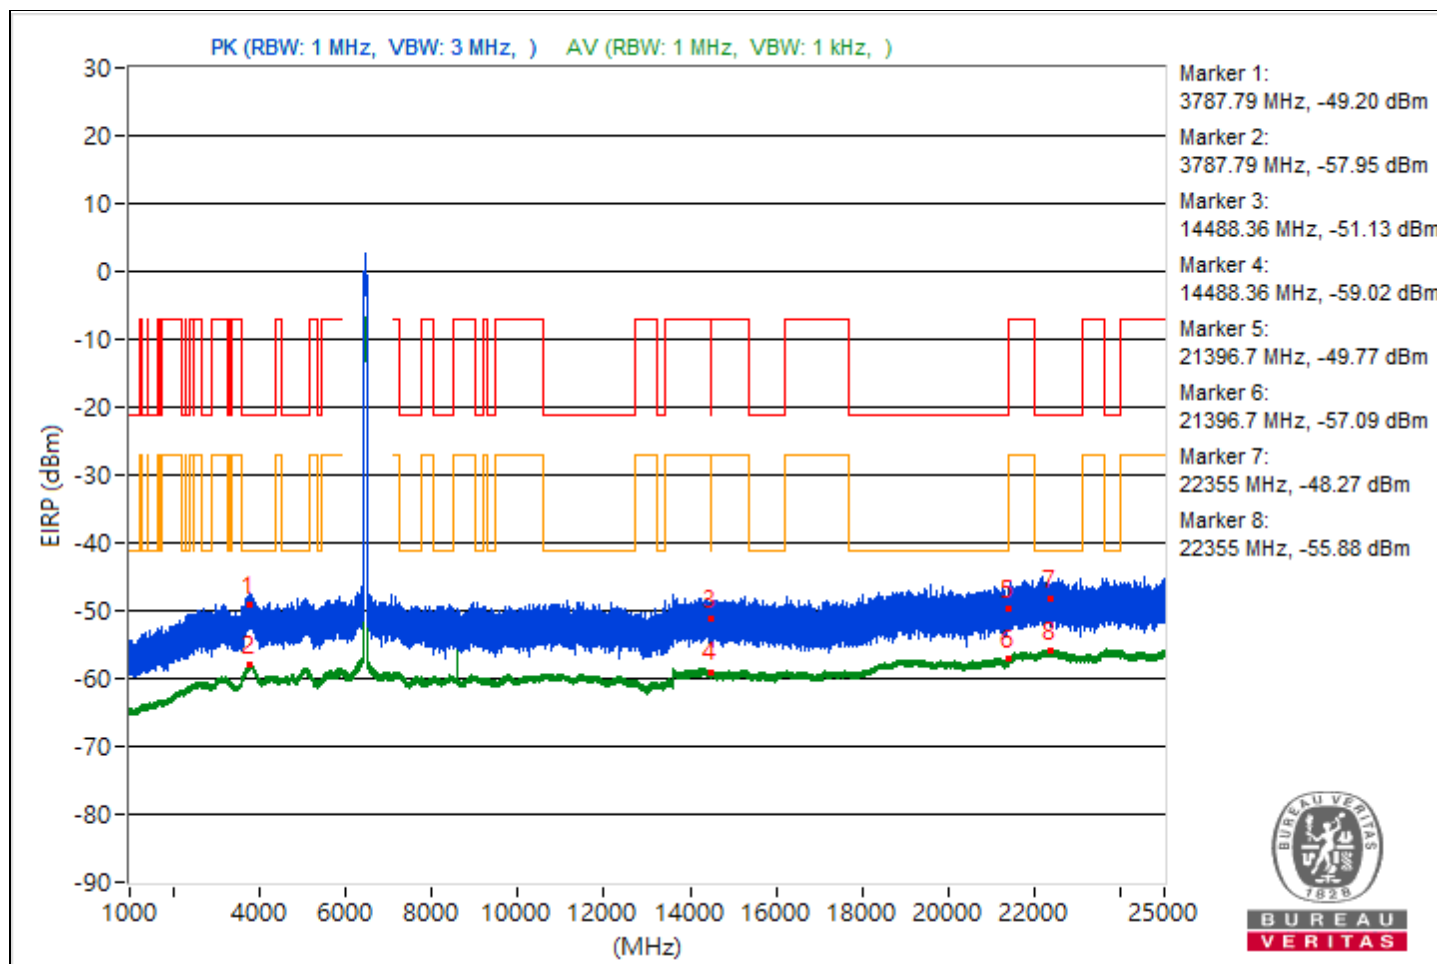


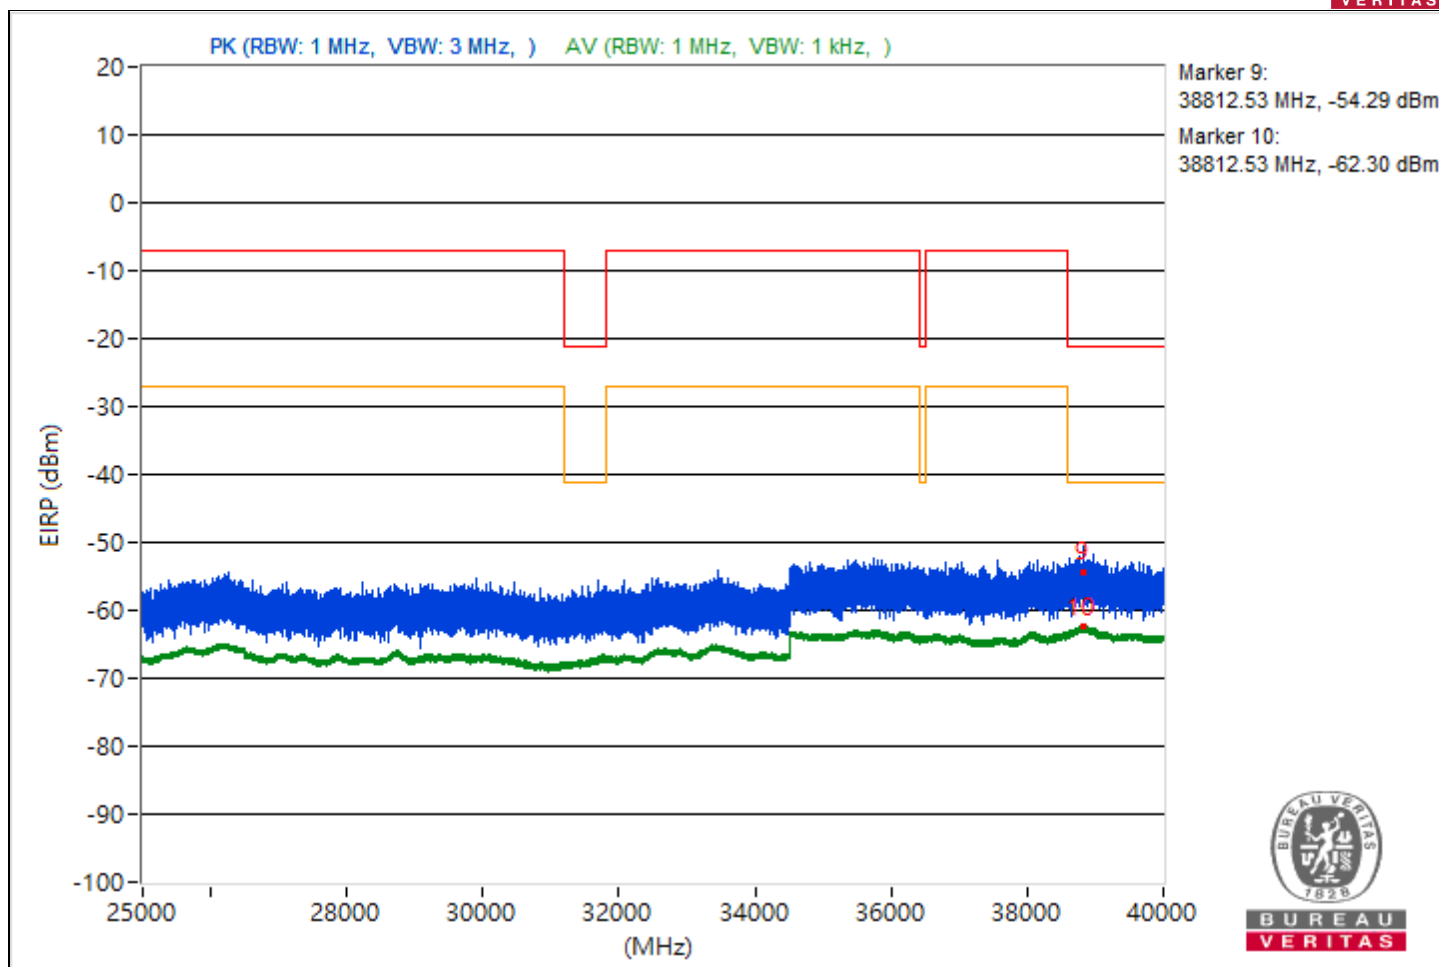


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3792.77	44.89 PK	74	-29.11	-57.7	-59	4.92	-50.37
2	3792.77	37.35 AV	54	-16.65	-65.42	-66.3	4.92	-57.91
3	14494.13	43.14 PK	74	-30.86	-60.34	-59.77	4.92	-52.12
4	14494.13	36.2 AV	54	-17.8	-66.69	-67.32	4.92	-59.06
5	21108	44.98 PK	74	-29.02	-57.22	-59.48	4.92	-50.28
6	21108	38.2 AV	54	-15.8	-65.15	-64.84	4.92	-57.06
7	22222.8	46.83 PK	74	-27.17	-56.78	-55.98	4.92	-48.43
8	22222.8	39.46 AV	54	-14.54	-63.91	-63.56	4.92	-55.8
9	38805.07	39.71 PK	74	-34.29	-63.57	-63.39	4.92	-55.55
10	38805.07	32.94 AV	54	-21.06	-70.8	-69.75	4.92	-62.32

Note: Margin value = Emission Level - Limit value

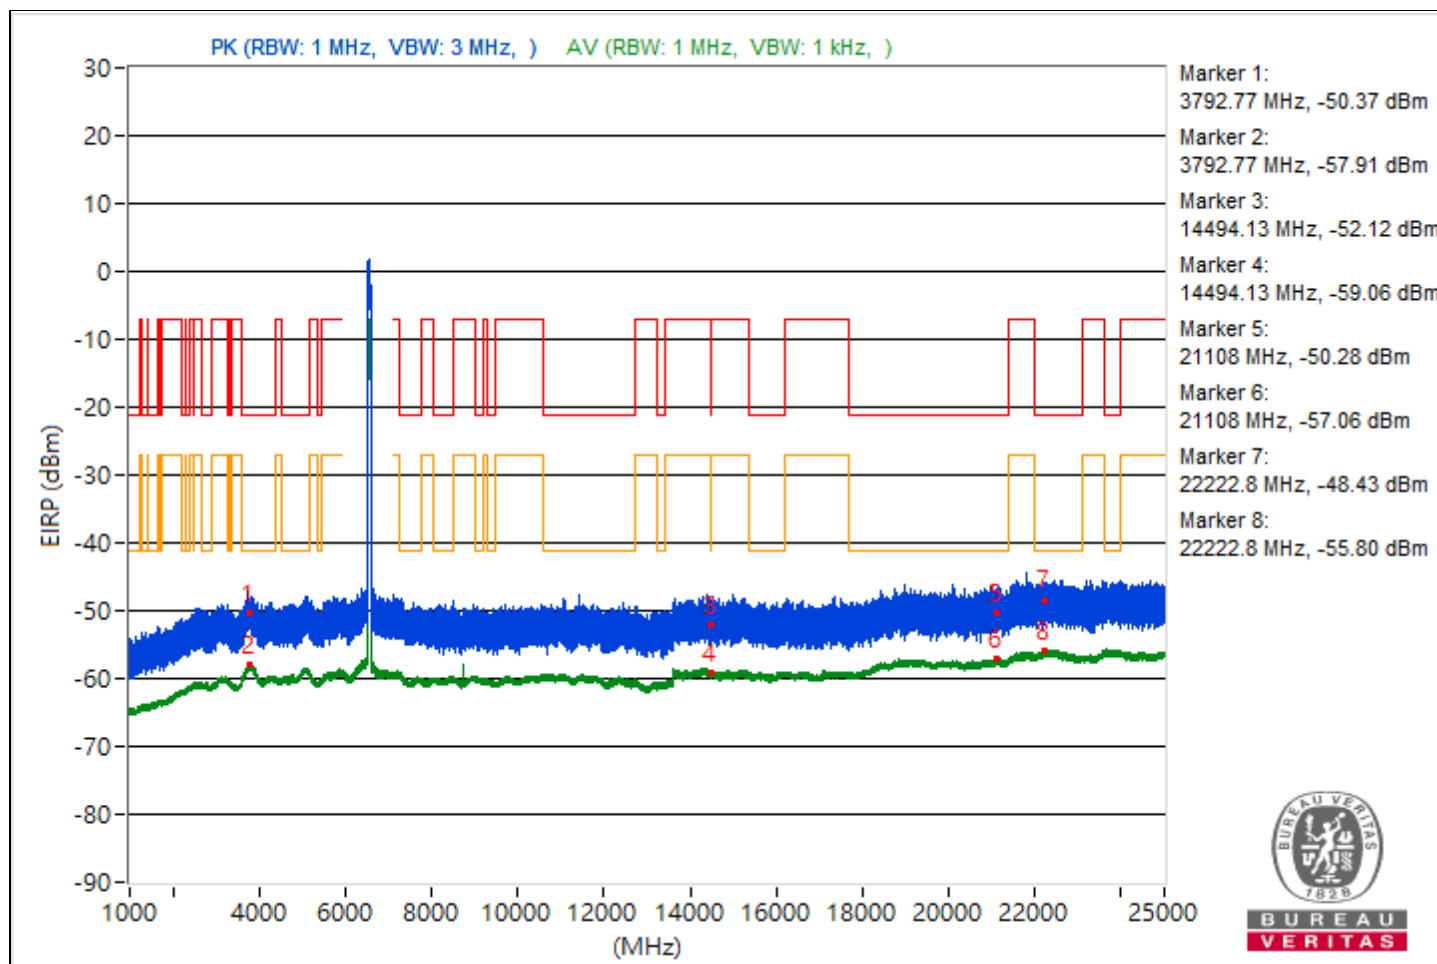


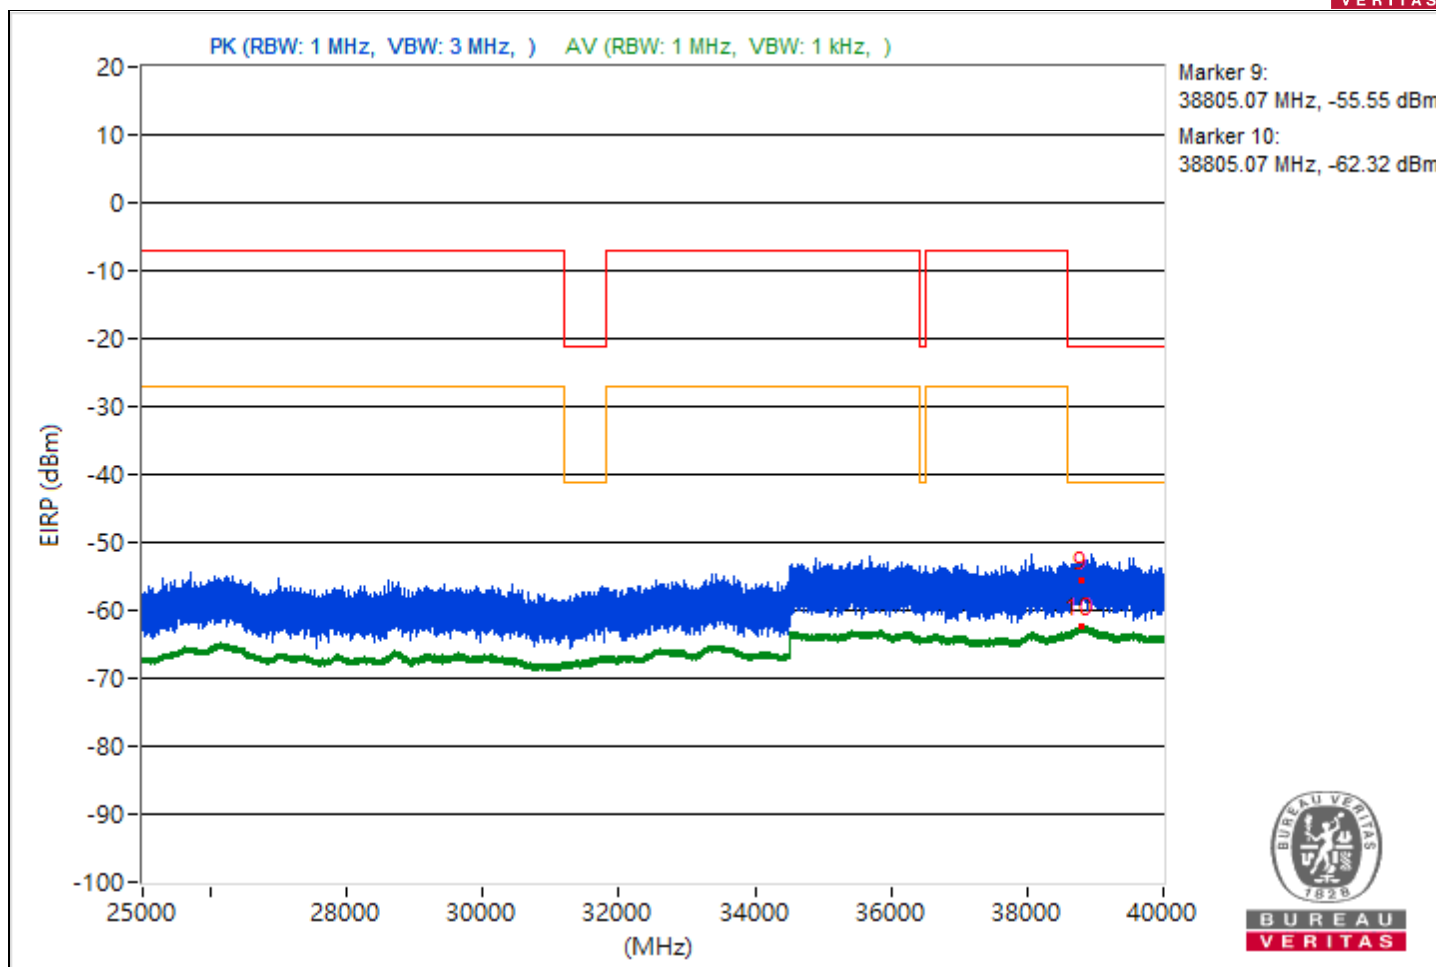


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3783.67	44.08 PK	74	-29.92	-58.78	-59.46	4.92	-51.18
2	3783.67	37.27 AV	54	-16.73	-65.74	-66.1	4.92	-57.99
3	7262.36	45.4 PK	74	-28.6	-56.01	-60.86	4.92	-49.86
4	7262.36	36.47 AV	54	-17.53	-66.5	-66.95	4.92	-58.79
5	21085.7	45.82 PK	74	-28.18	-57.49	-57.25	4.92	-49.44
6	21085.7	38.01 AV	54	-15.99	-64.83	-65.56	4.92	-57.25
7	23829.6	47.95 PK	74	-26.05	-53.35	-58.66	4.92	-47.31
8	23829.6	39.43 AV	54	-14.57	-64.19	-63.37	4.92	-55.83
9	38824.18	36.92 PK	74	-37.08	-66.86	-65.76	4.92	-58.34
10	38824.18	33 AV	54	-21	-70.58	-69.83	4.92	-62.26

Note: Margin value = Emission Level - Limit value

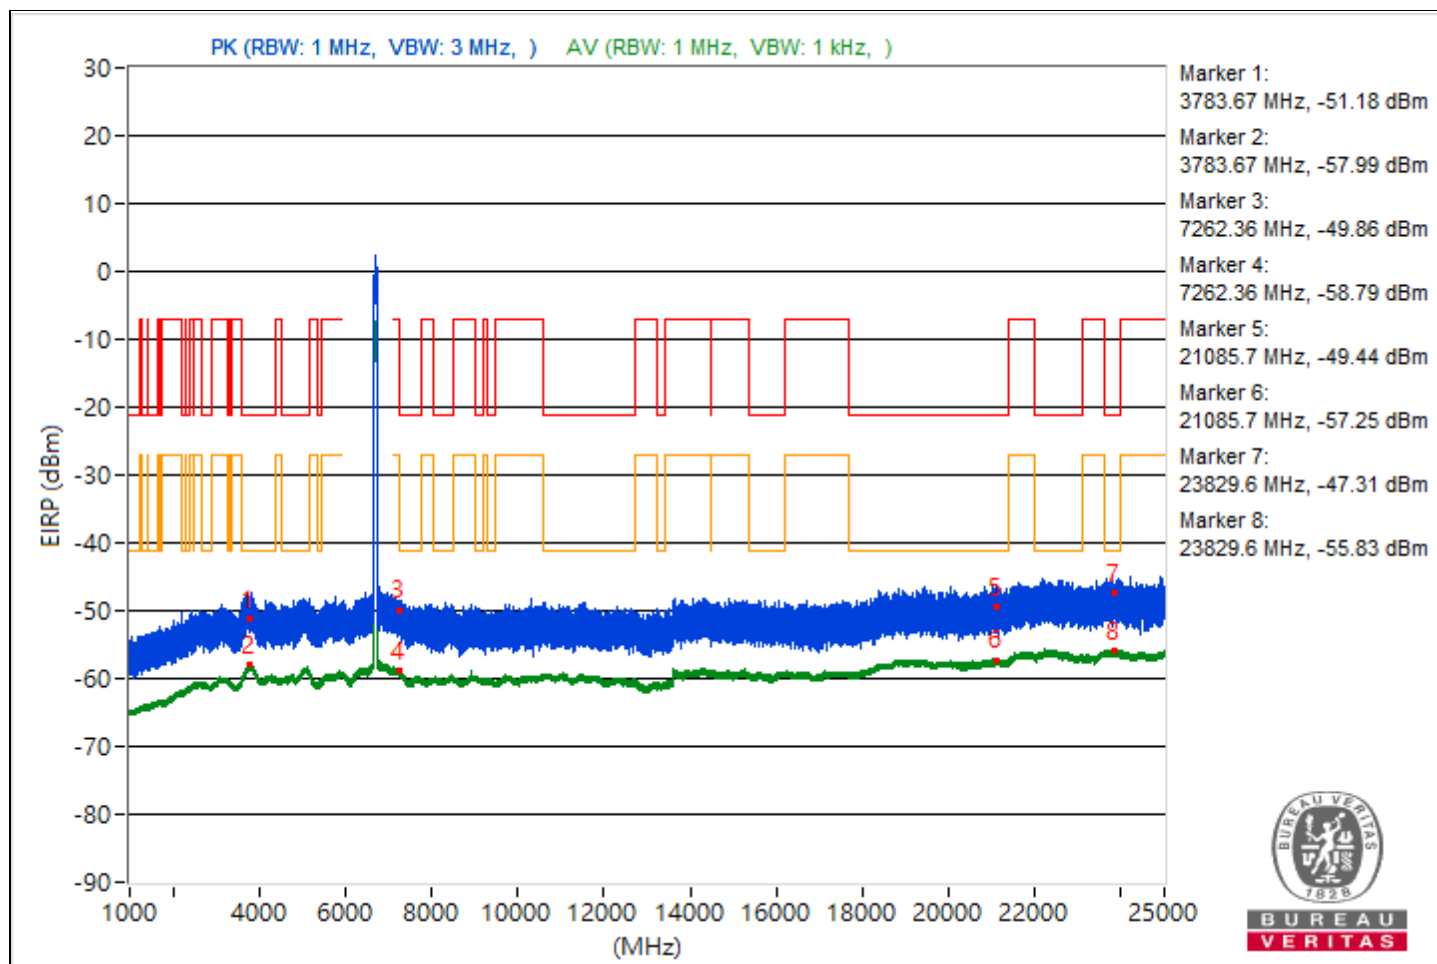


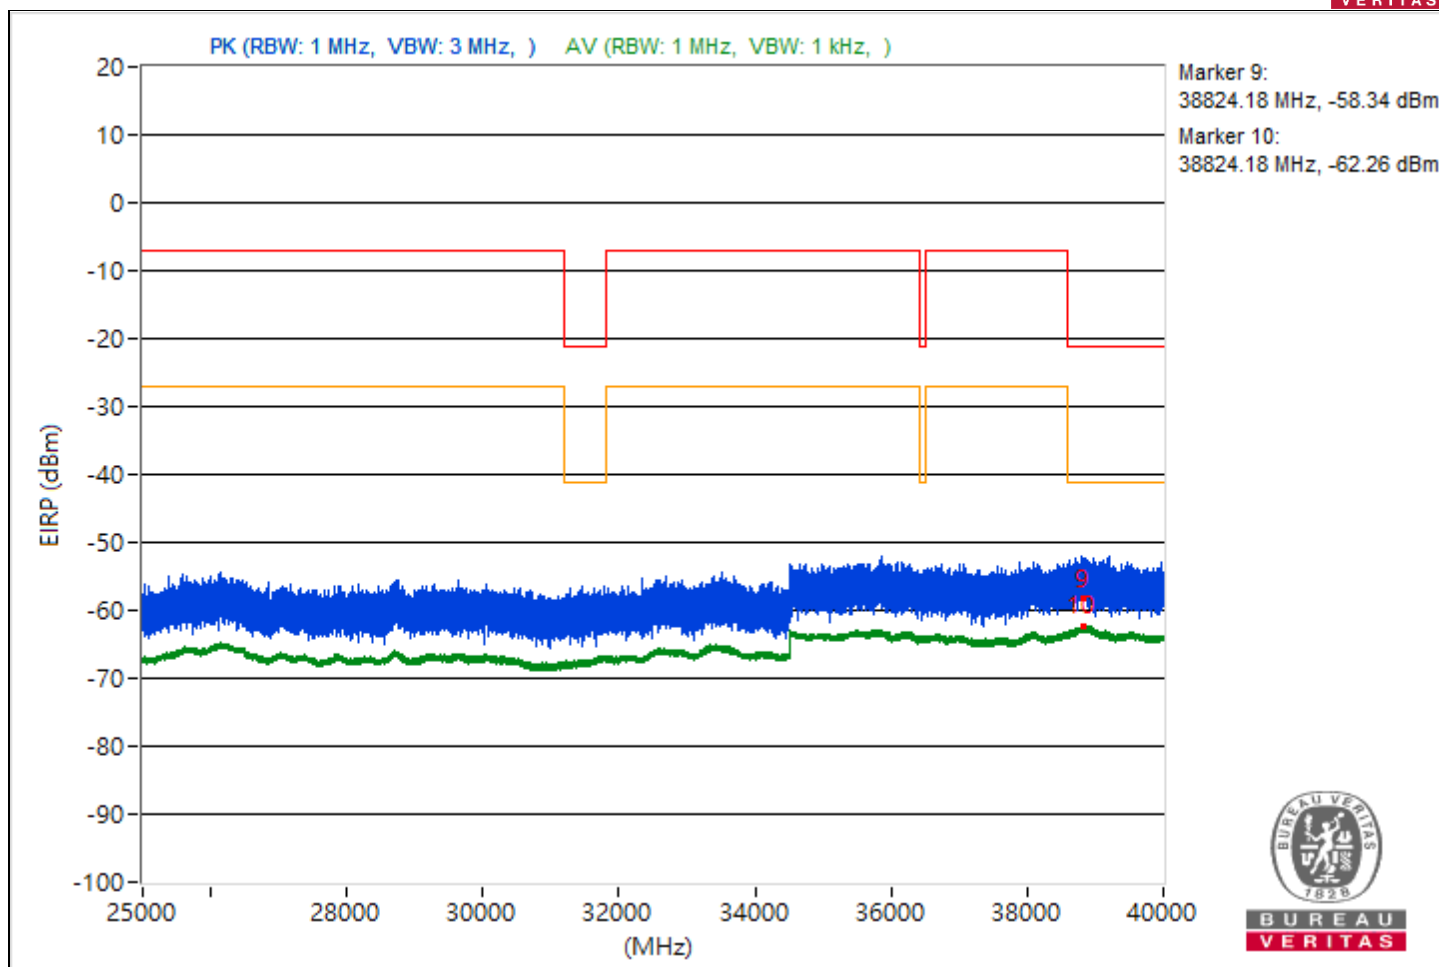


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3774.41	44.71 PK	74	-29.29	-58.21	-58.78	4.92	-50.55
2	3774.41	37.32 AV	54	-16.68	-65.64	-66.1	4.92	-57.94
3	14478.84	42.69 PK	74	-31.31	-59.97	-61.11	4.92	-52.57
4	14478.84	36.41 AV	54	-17.59	-67.03	-66.55	4.92	-58.85
5	21399.1	46.53 PK	74	-27.47	-56.47	-56.87	4.92	-48.73
6	21399.1	38.08 AV	54	-15.92	-64.8	-65.43	4.92	-57.18
7	23964.6	48.59 PK	74	-25.41	-55.44	-53.89	4.92	-46.67
8	23964.6	39.41 AV	54	-14.59	-64.04	-63.54	4.92	-55.85
9	38840.71	38.98 PK	74	-35.02	-63.78	-64.68	4.92	-56.28
10	38840.71	32.9 AV	54	-21.1	-70.79	-69.84	4.92	-62.36

Note: Margin value = Emission Level - Limit value

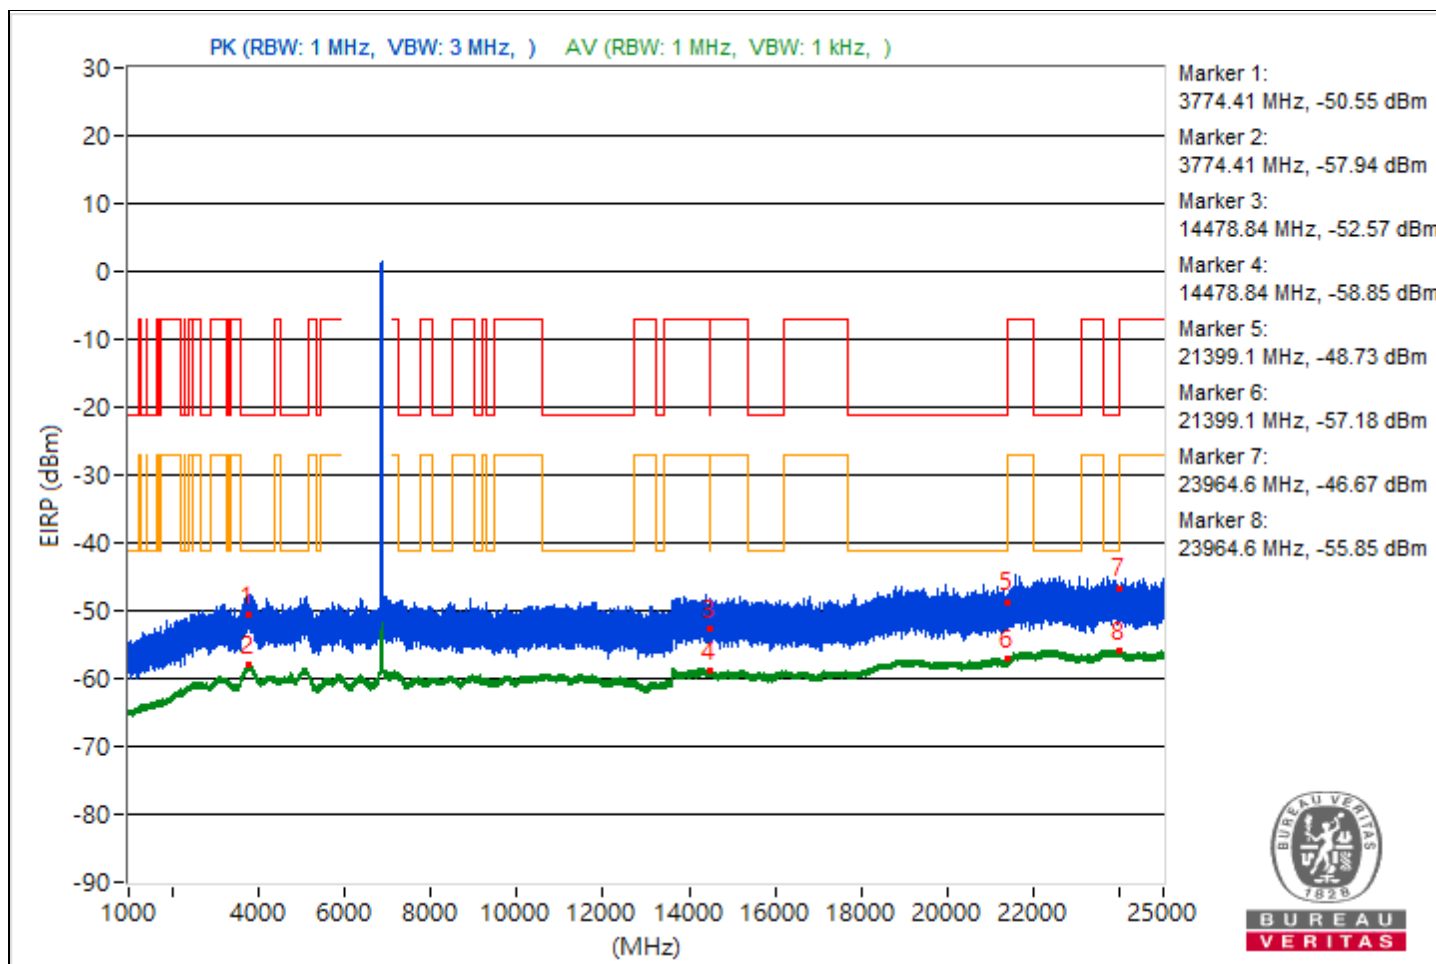


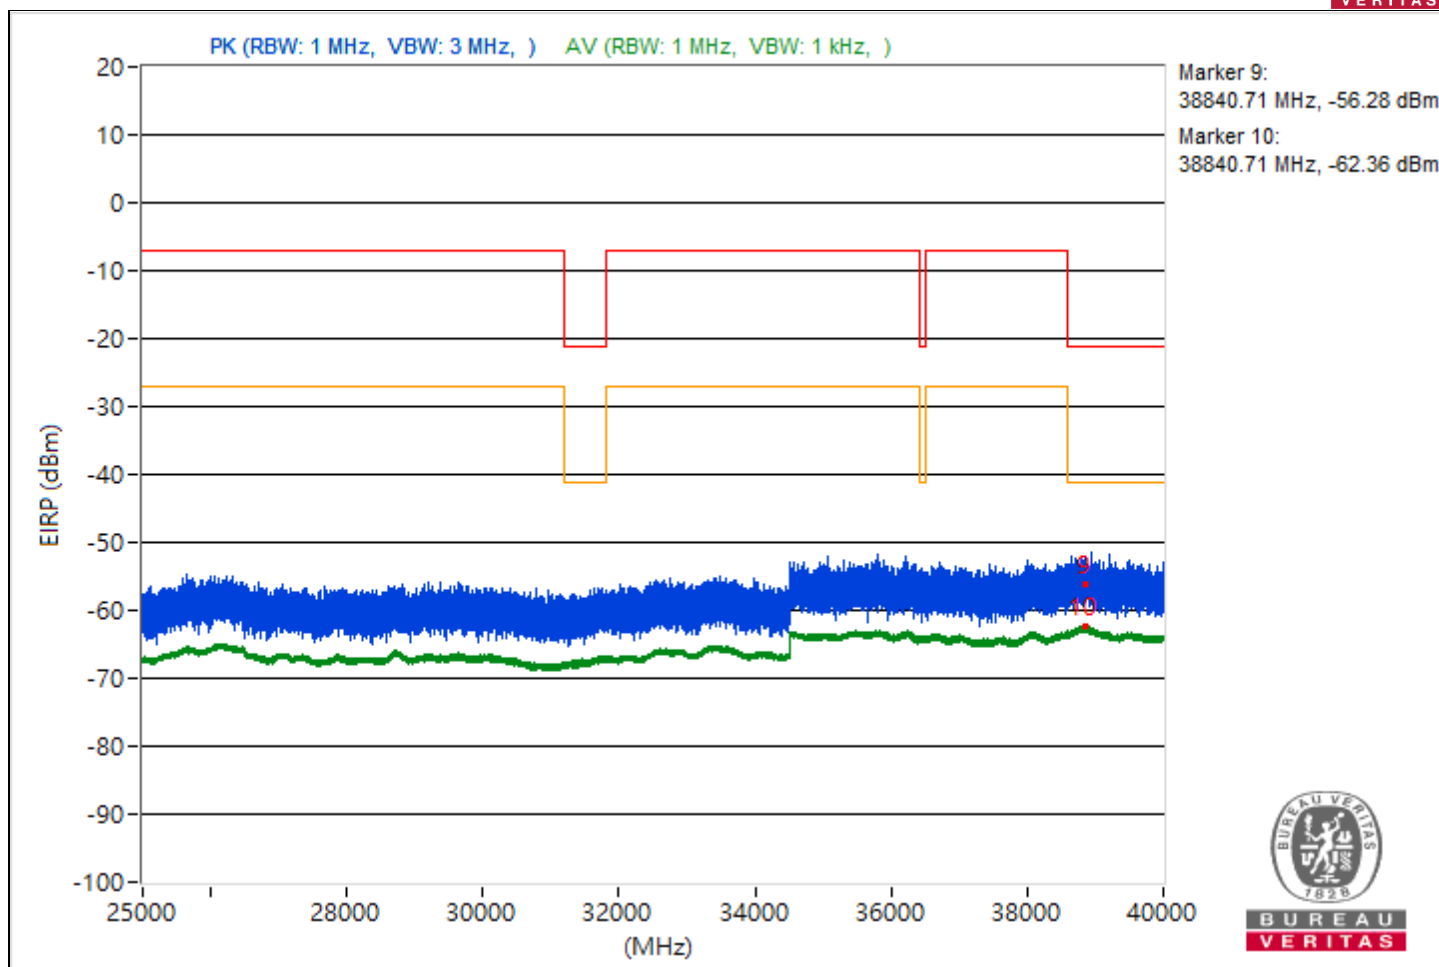


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3788.88	44.08 PK	74	-29.92	-58.06	-60.48	4.92	-51.18
2	3788.88	37.23 AV	54	-16.77	-66.34	-65.61	4.92	-58.03
3	7255.9	44.6 PK	74	-29.4	-58.06	-59.2	4.92	-50.66
4	7255.9	37.48 AV	54	-16.52	-65.54	-65.9	4.92	-57.78
5	21149.9	46.47 PK	74	-27.53	-56.53	-56.92	4.92	-48.79
6	21149.9	38.25 AV	54	-15.75	-64.64	-65.27	4.92	-57.01
7	23765.6	49.54 PK	74	-24.46	-53.57	-53.73	4.92	-45.72
8	23765.6	39.38 AV	54	-14.62	-63.46	-64.2	4.92	-55.88
9	38834.04	38.98 PK	74	-35.02	-64.83	-63.67	4.92	-56.28
10	38834.04	33.01 AV	54	-20.99	-69.94	-70.44	4.92	-62.25

Note: Margin value = Emission Level - Limit value

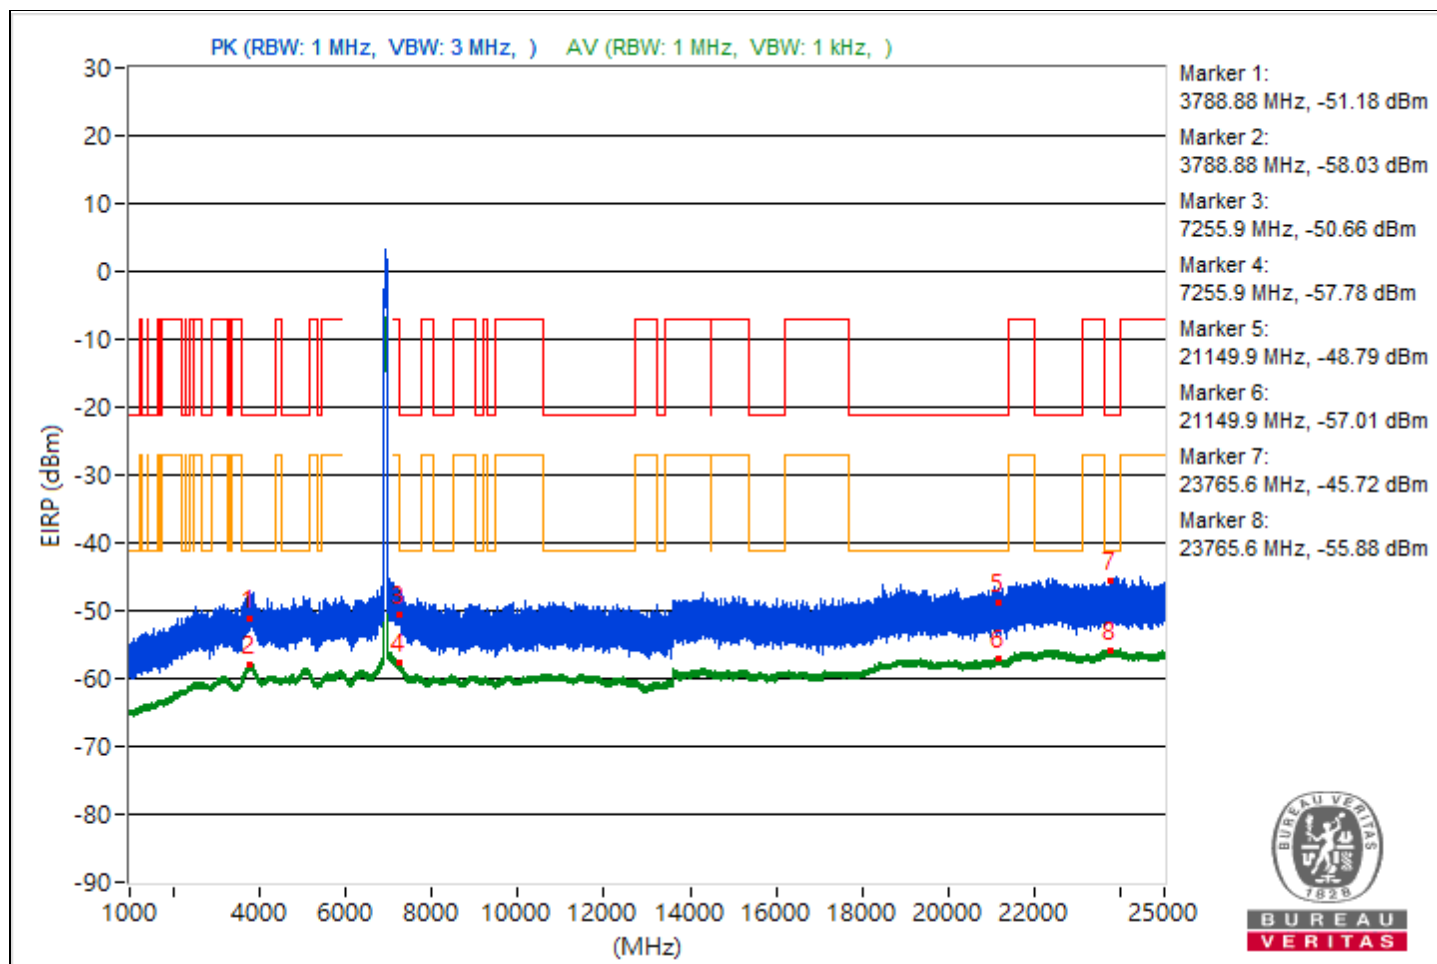


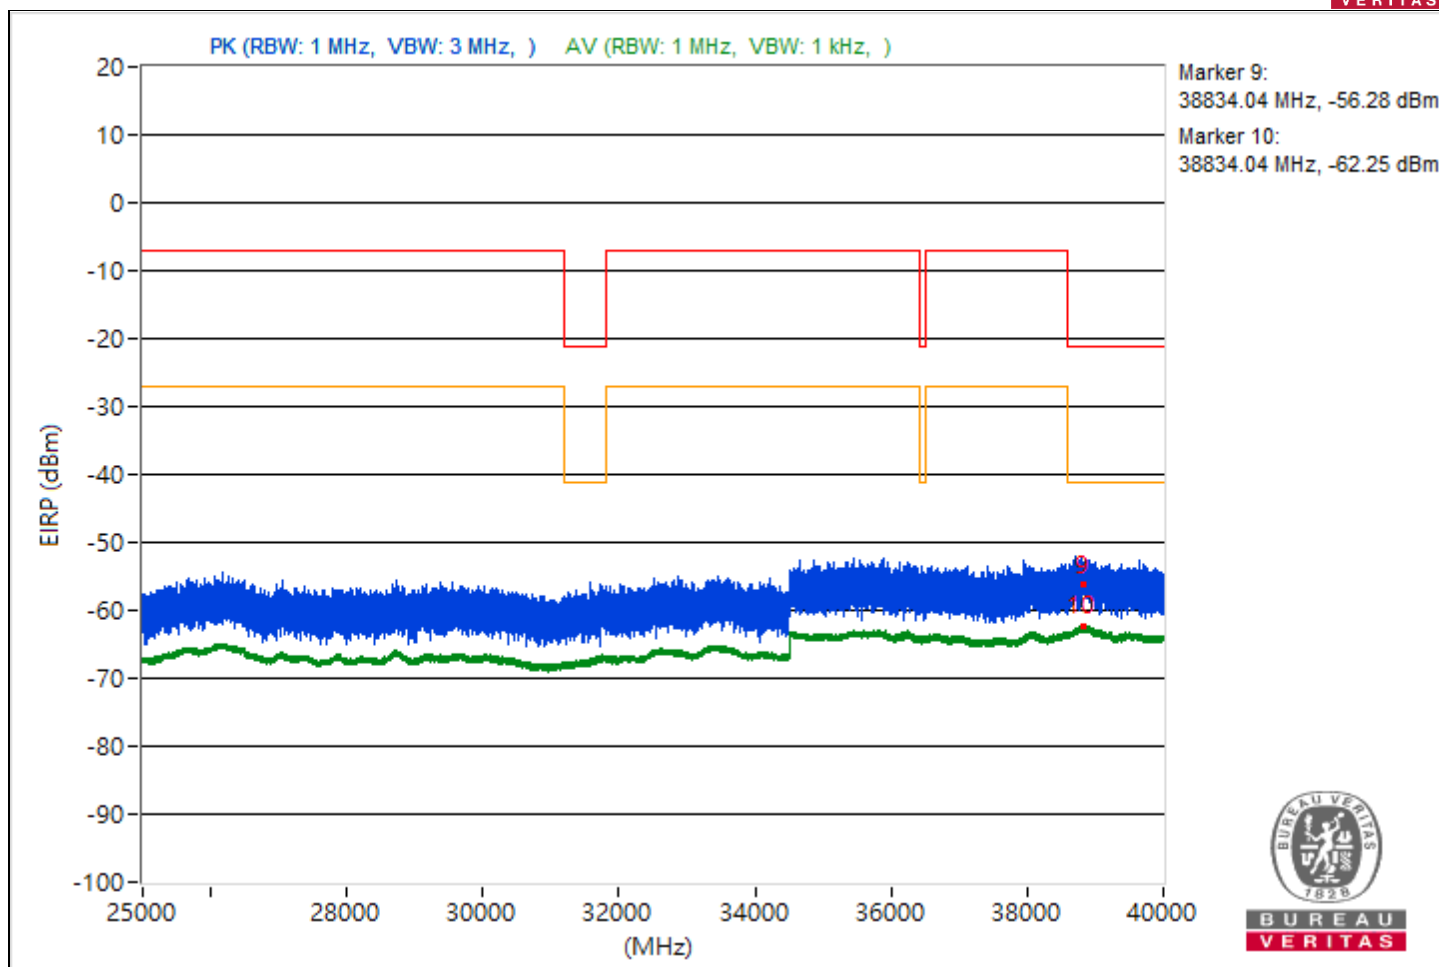


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3800.23	44.39 PK	74	-29.61	-58.11	-59.64	4.92	-50.87
2	3800.23	37.29 AV	54	-16.71	-66.13	-65.67	4.92	-57.97
3	7255.36	45.27 PK	74	-28.73	-58.25	-57.62	4.92	-49.99
4	7255.36	37.66 AV	54	-16.34	-65.7	-65.36	4.92	-57.6
5	21198.2	44.9 PK	74	-29.1	-58.38	-58.2	4.92	-50.36
6	21198.2	38.08 AV	54	-15.92	-64.74	-65.52	4.92	-57.18
7	23902.8	45.39 PK	74	-28.61	-57.93	-57.68	4.92	-49.87
8	23902.8	39.55 AV	54	-14.45	-63.94	-63.36	4.92	-55.71
9	38848.8	40.95 PK	74	-33.05	-60.8	-64.39	4.92	-54.31
10	38848.8	33.01 AV	54	-20.99	-70.11	-70.27	4.92	-62.25

Note: Margin value = Emission Level - Limit value

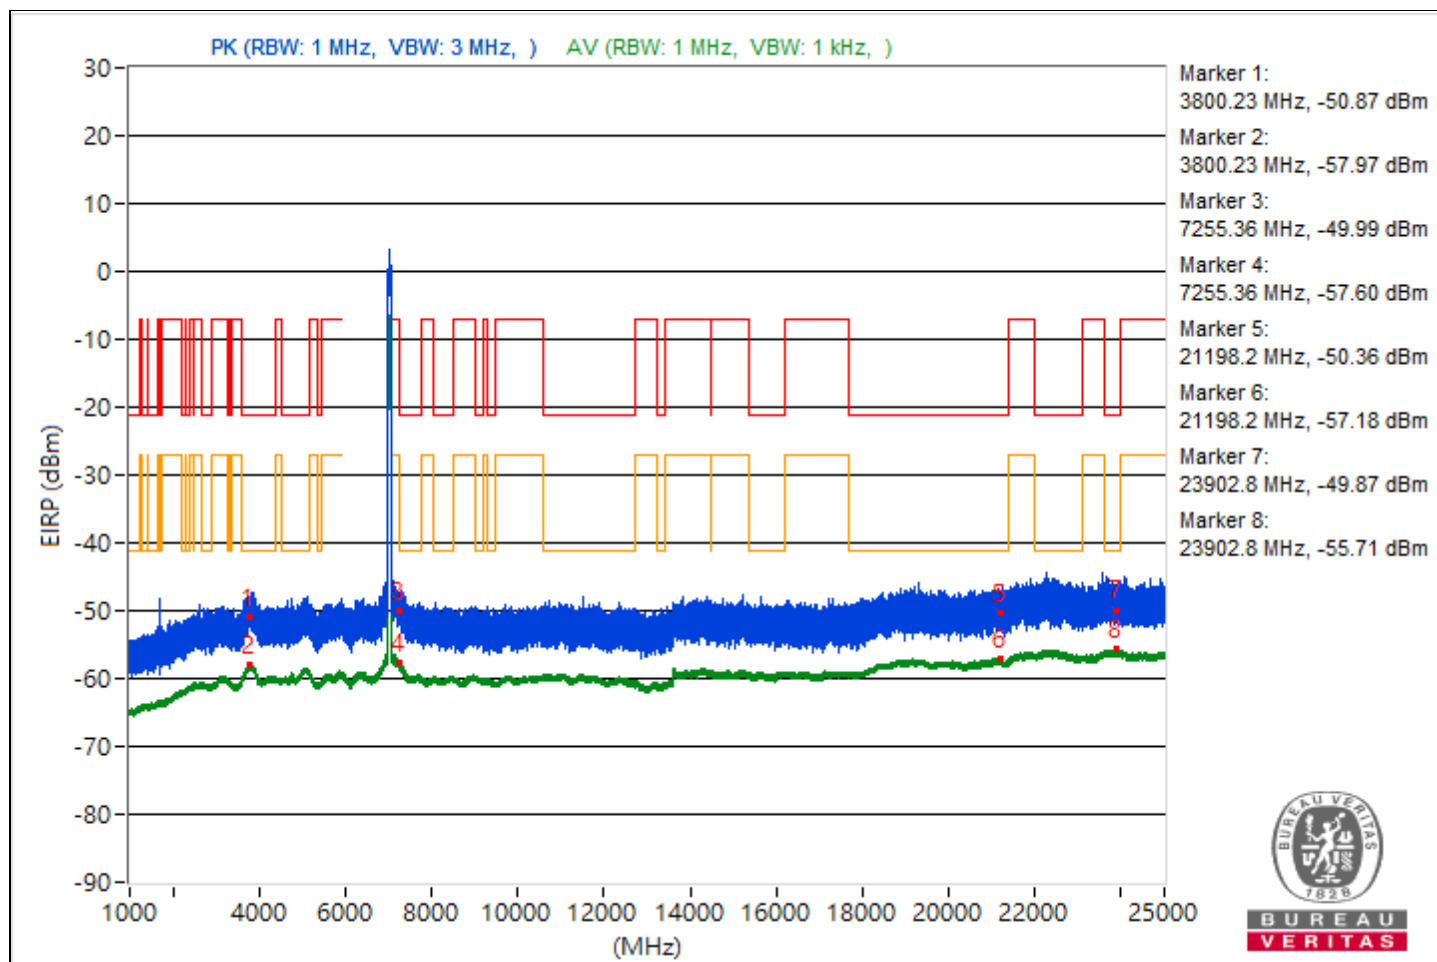


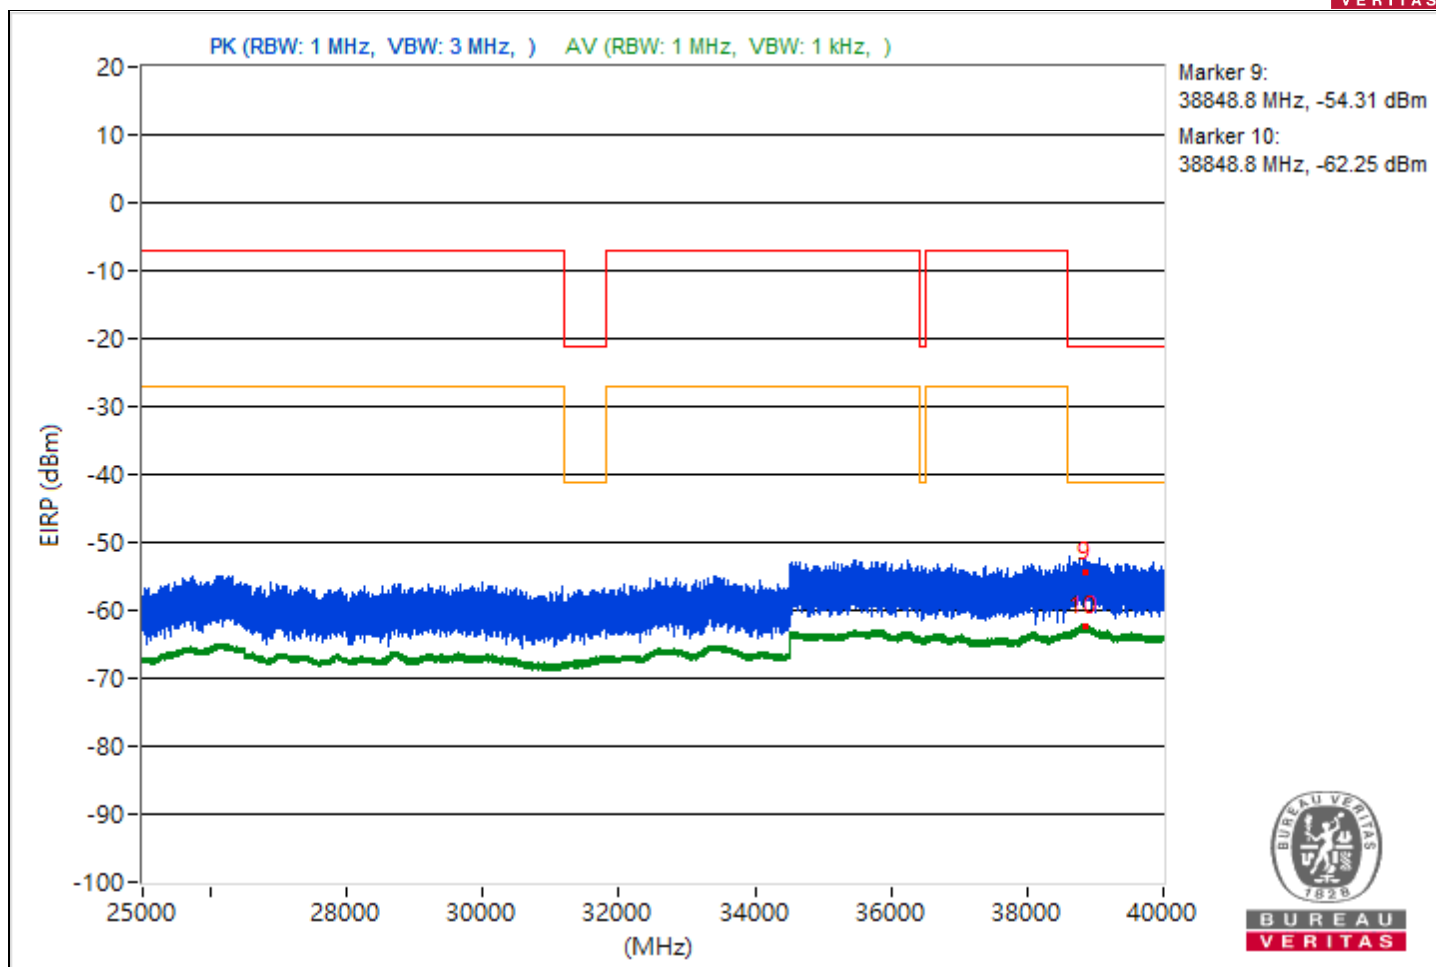


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.64	43.74 PK	74	-30.26	-59.55	-59.36	4.92	-51.52
2	3809.64	37.32 AV	54	-16.68	-66.09	-65.66	4.92	-57.94
3	8033.33	48.89 PK	74	-25.11	-52.13	-58.88	4.92	-46.37
4	8033.33	45.16 AV	54	-8.84	-55.28	-67.34	4.92	-50.1
5	21120	44.55 PK	74	-29.45	-59.31	-58.06	4.92	-50.71
6	21120	38.17 AV	54	-15.83	-64.64	-65.44	4.92	-57.09
7	23627.9	46.08 PK	74	-27.92	-58.5	-56.05	4.92	-49.18
8	23627.9	39.31 AV	54	-14.69	-64.33	-63.47	4.92	-55.95
9	38804.27	38.91 PK	74	-35.09	-64.73	-63.87	4.92	-56.35
10	38804.27	33.06 AV	54	-20.94	-70.51	-69.78	4.92	-62.2

Note: Margin value = Emission Level - Limit value

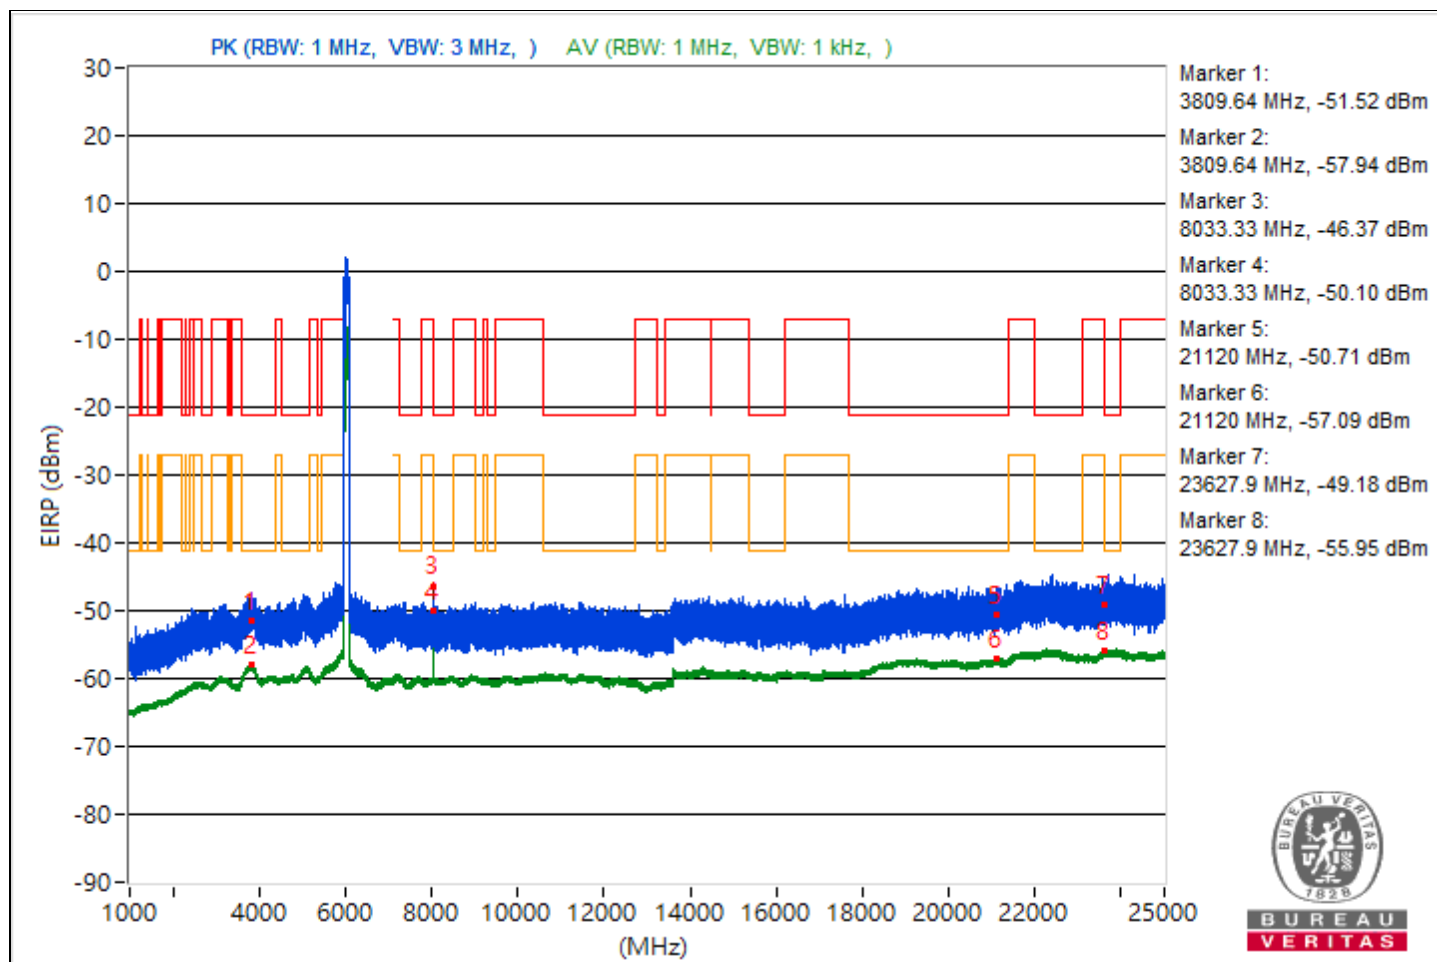


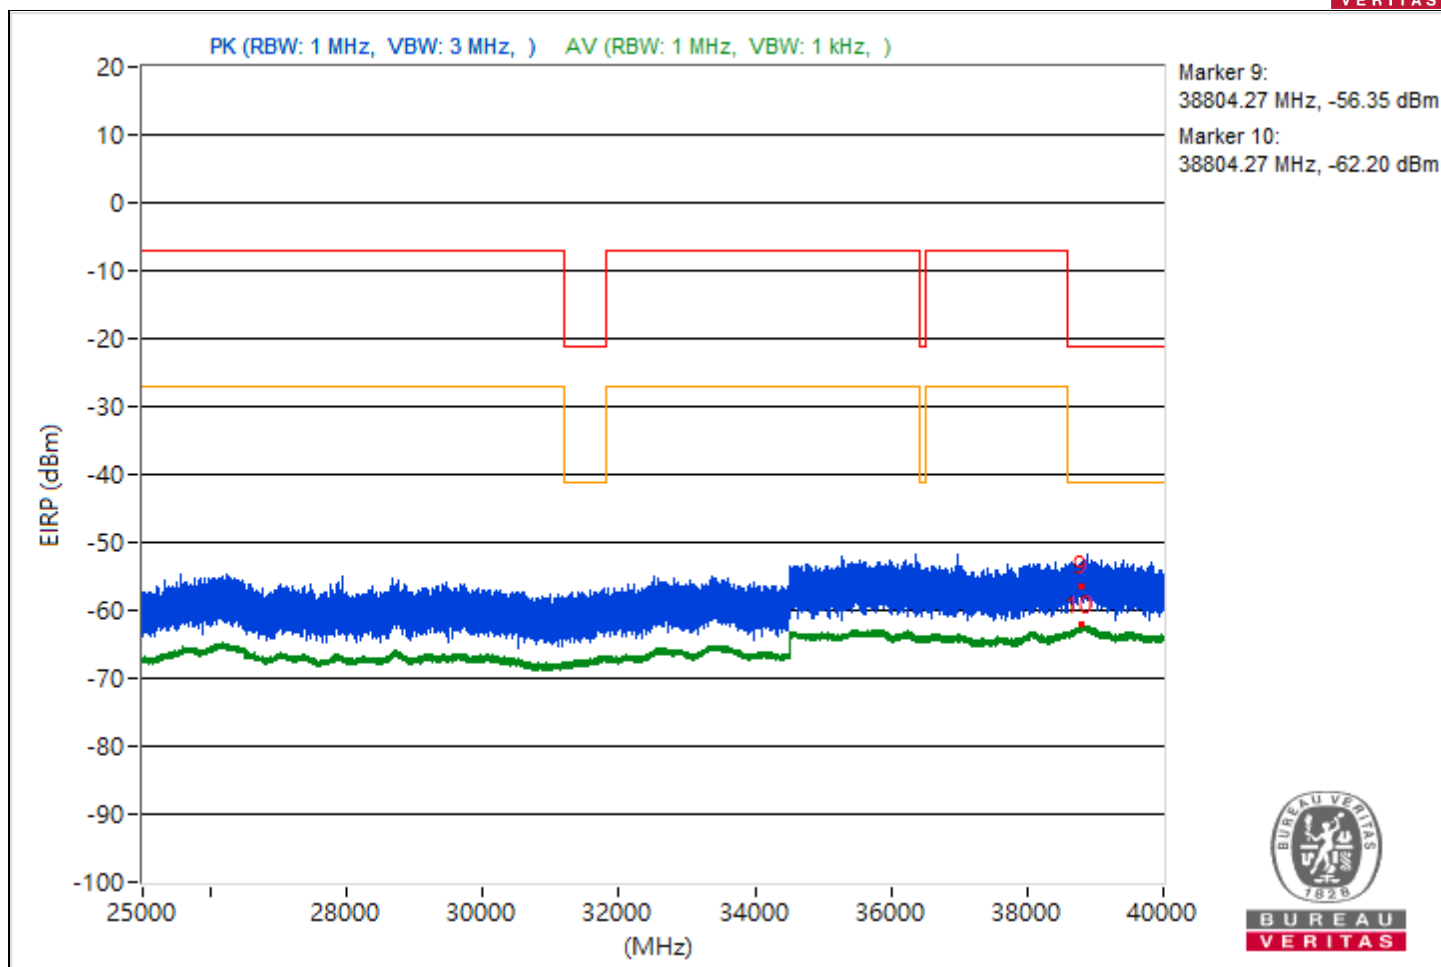


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.89	44.06 PK	74	-29.94	-60.11	-58.34	4.92	-51.2
2	3817.89	37.25 AV	54	-16.75	-65.63	-66.29	4.92	-58.01
3	8246.58	46.39 PK	74	-27.61	-55.21	-59.35	4.92	-48.87
4	8246.58	42.79 AV	54	-11.21	-57.8	-67.91	4.92	-52.47
5	21133.3	46.78 PK	74	-27.22	-56.92	-55.95	4.92	-48.48
6	21133.3	38.19 AV	54	-15.81	-65.31	-64.71	4.92	-57.07
7	23887.5	46.21 PK	74	-27.79	-56.02	-58.21	4.92	-49.05
8	23887.5	39.43 AV	54	-14.57	-63.99	-63.53	4.92	-55.83
9	38845.6	41.16 PK	74	-32.84	-64.55	-60.44	4.92	-54.1
10	38845.6	33.05 AV	54	-20.95	-70.61	-69.72	4.92	-62.21

Note: Margin value = Emission Level - Limit value

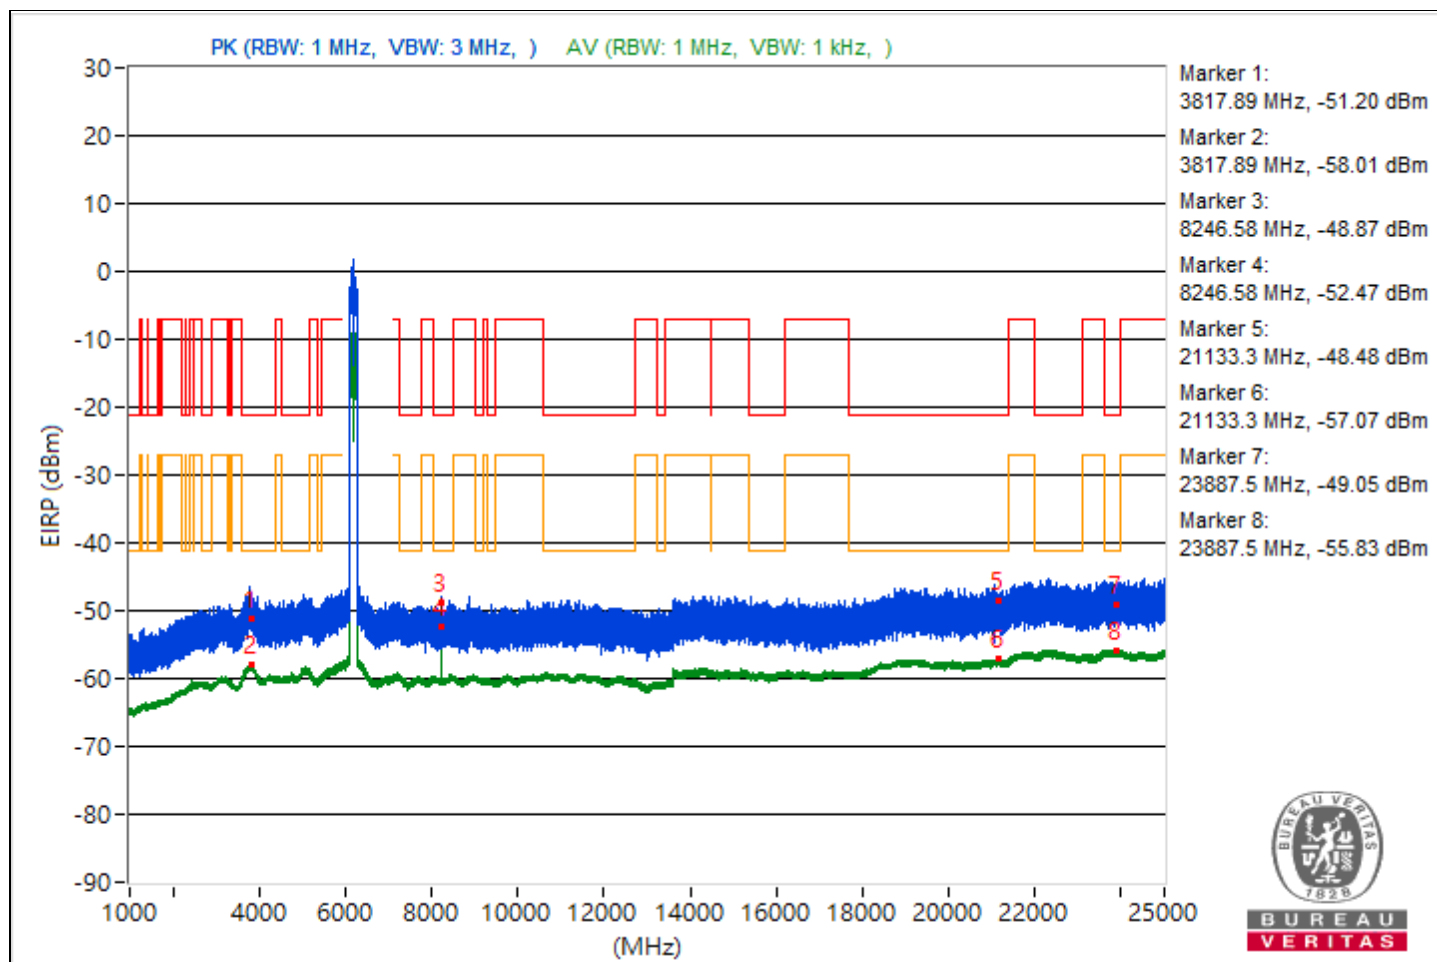


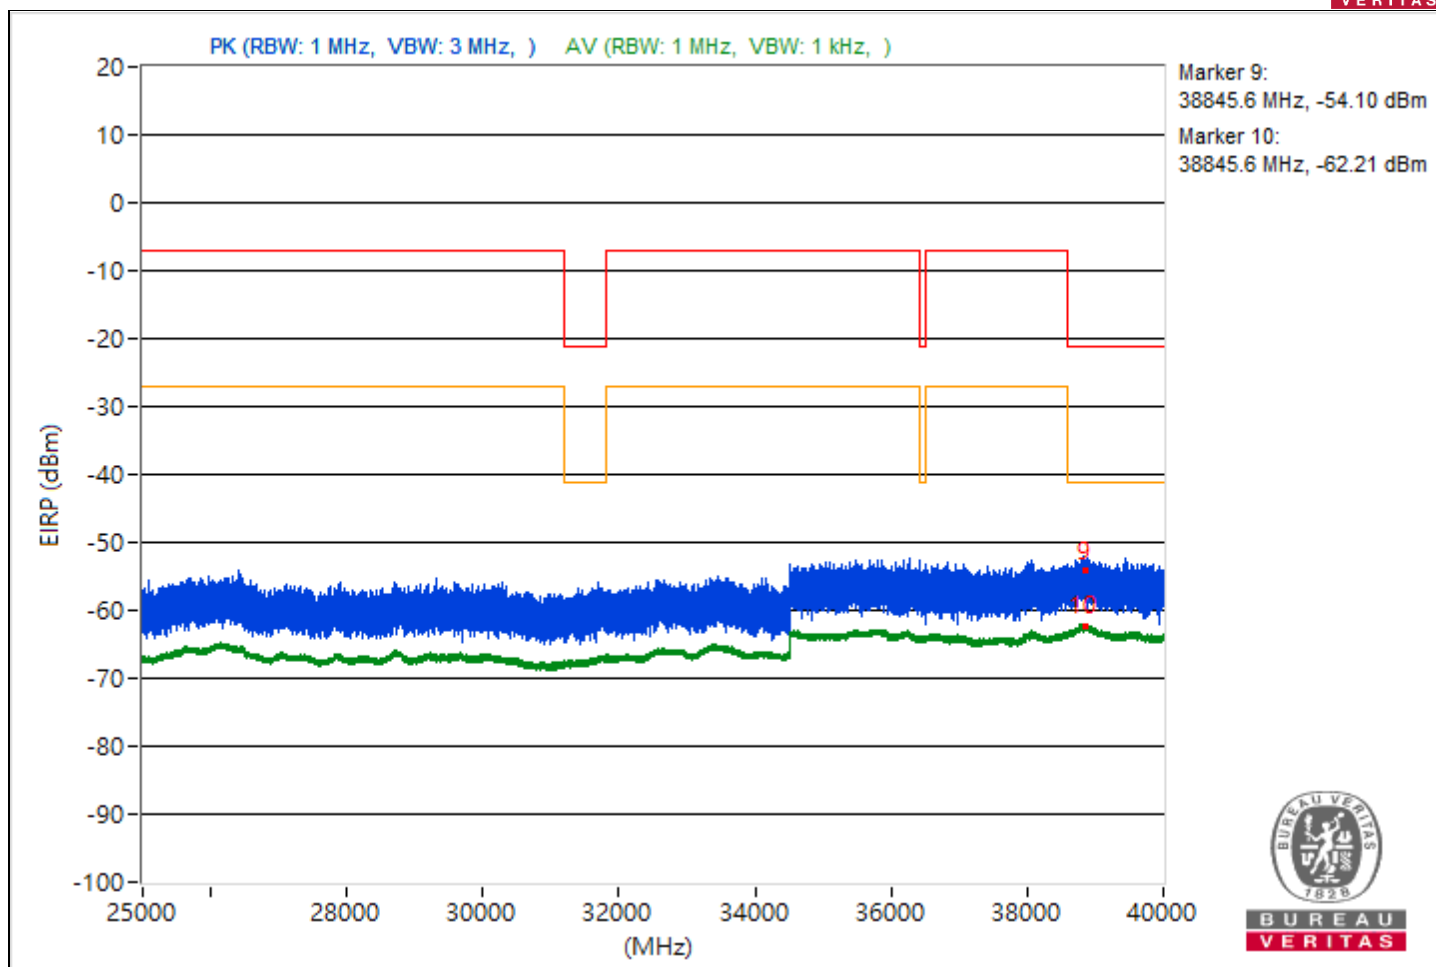


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.03	45.54 PK	74	-28.46	-58.21	-57.15	4.92	-49.72
2	3782.03	37.36 AV	54	-16.64	-65.45	-66.25	4.92	-57.9
3	8460	47.06 PK	74	-26.94	-54.69	-58.29	4.92	-48.2
4	8460	42.39 AV	54	-11.61	-58.31	-67.24	4.92	-52.87
5	21152.4	44.91 PK	74	-29.09	-58.84	-57.78	4.92	-50.35
6	21152.4	38.25 AV	54	-15.75	-64.53	-65.38	4.92	-57.01
7	22218.3	47.77 PK	74	-26.23	-54.99	-55.89	4.92	-47.49
8	22218.3	39.29 AV	54	-14.71	-63.57	-64.25	4.92	-55.97
9	38851.64	39.05 PK	74	-34.95	-65.55	-63.08	4.92	-56.21
10	38851.64	33.09 AV	54	-20.91	-69.83	-70.38	4.92	-62.17

Note: Margin value = Emission Level - Limit value

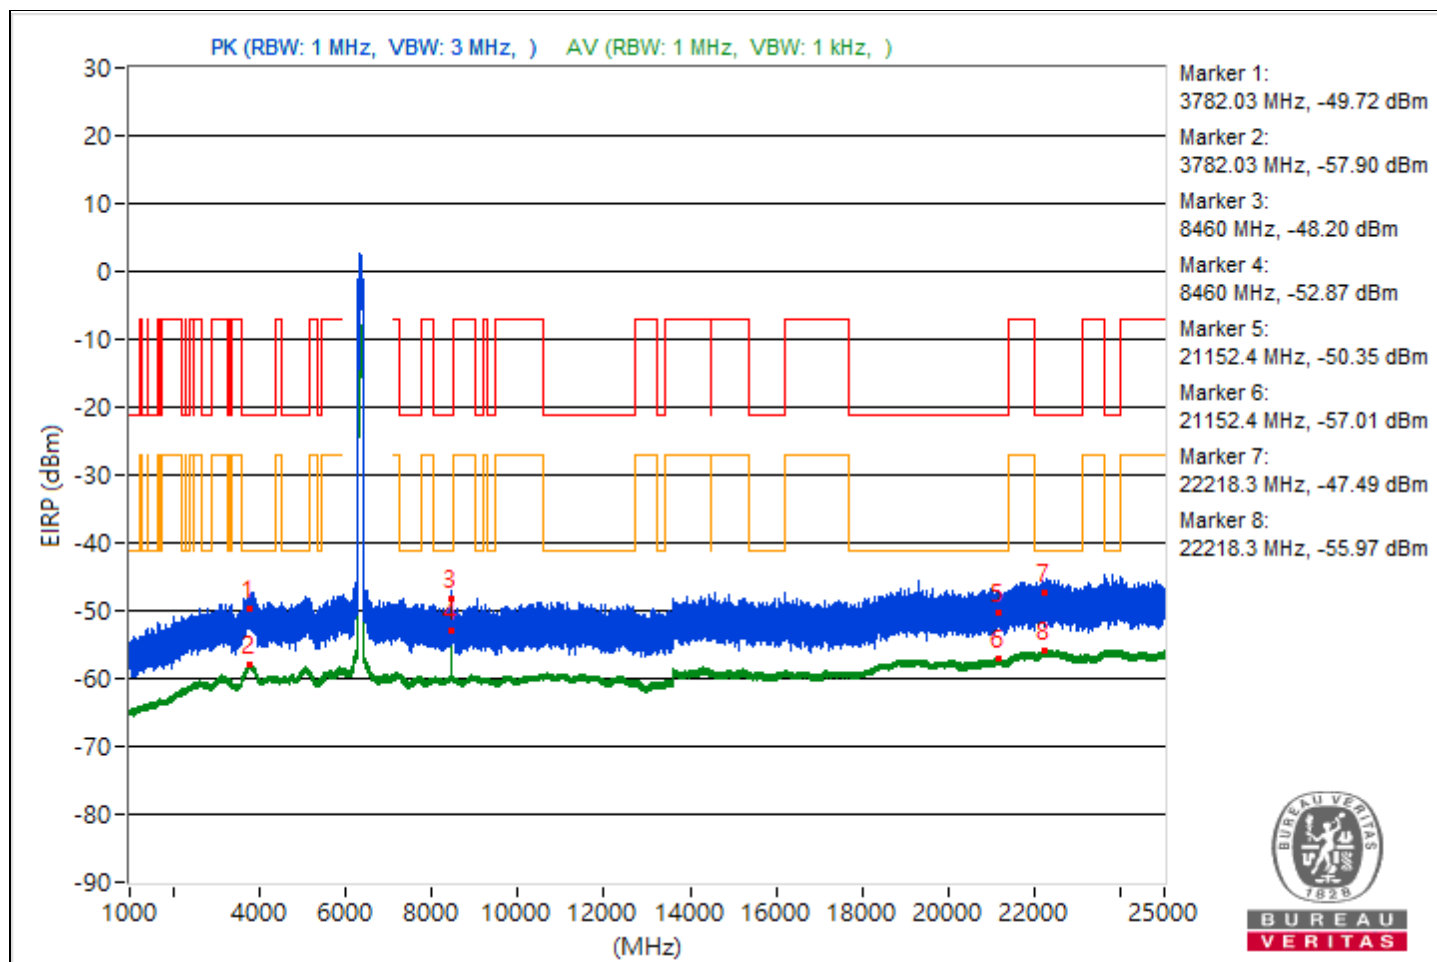


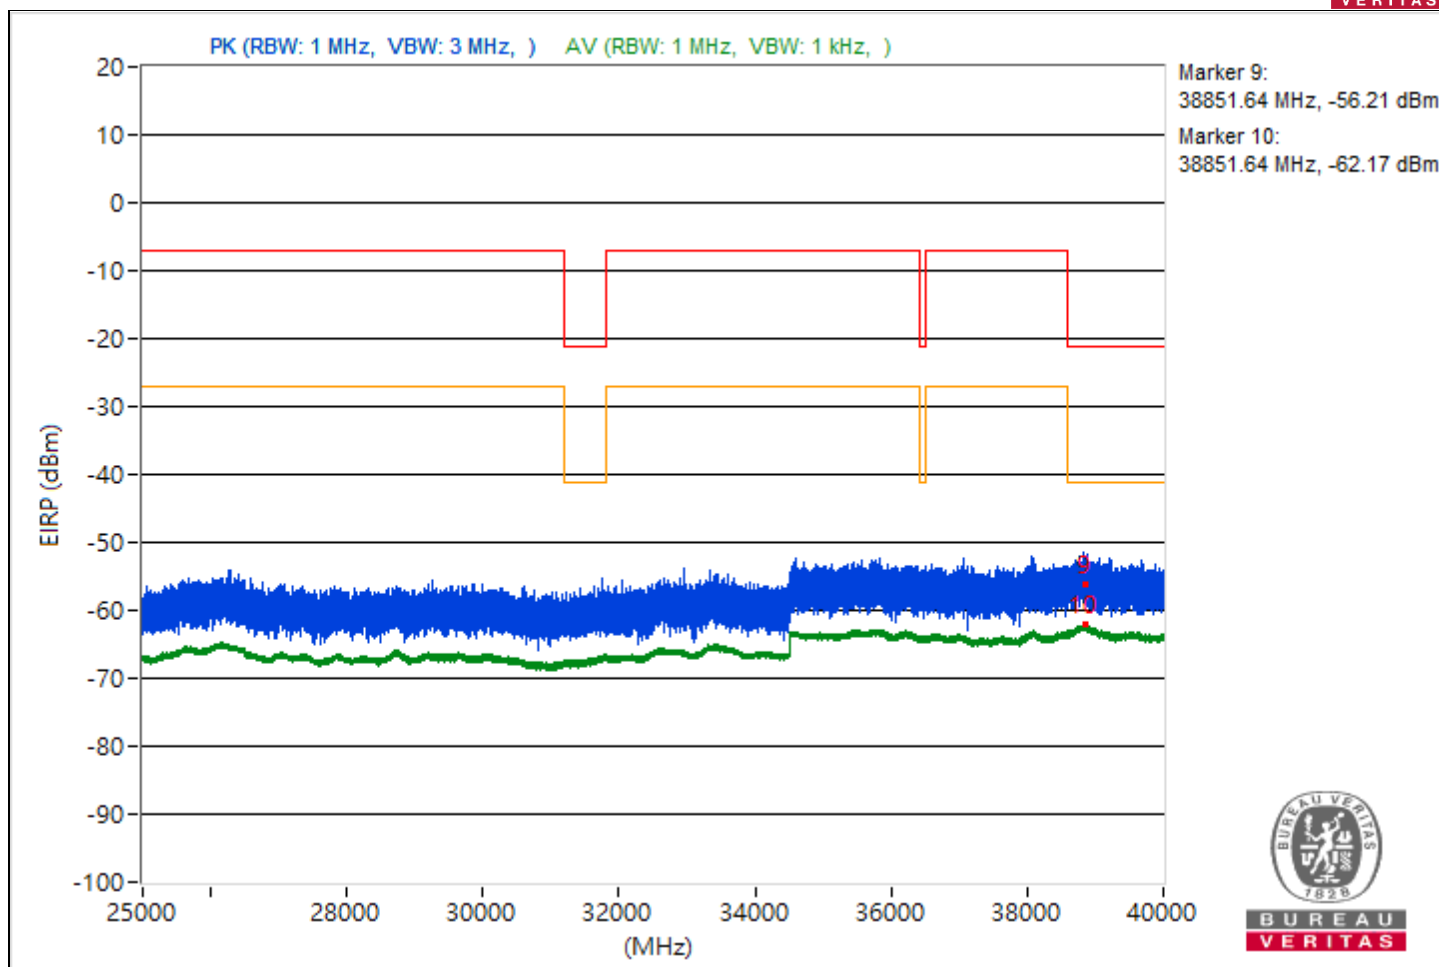


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.97	45.19 PK	74	-28.81	-57.82	-58.18	4.92	-50.07
2	3803.97	37.48 AV	54	-16.52	-65.48	-65.95	4.92	-57.78
3	14485.96	44.09 PK	74	-29.91	-58.04	-60.49	4.92	-51.17
4	14485.96	36.35 AV	54	-17.65	-67.19	-66.51	4.92	-58.91
5	21145	45.47 PK	74	-28.53	-57.17	-58.35	4.92	-49.79
6	21145	38.12 AV	54	-15.88	-65.32	-64.83	4.92	-57.14
7	23638.3	45.6 PK	74	-28.4	-57.14	-58.1	4.92	-49.66
8	23638.3	39.46 AV	54	-14.54	-63.4	-64.1	4.92	-55.8
9	38830.49	38.8 PK	74	-35.2	-63.7	-65.21	4.92	-56.46
10	38830.49	33.04 AV	54	-20.96	-70.47	-69.85	4.92	-62.22

Note: Margin value = Emission Level - Limit value

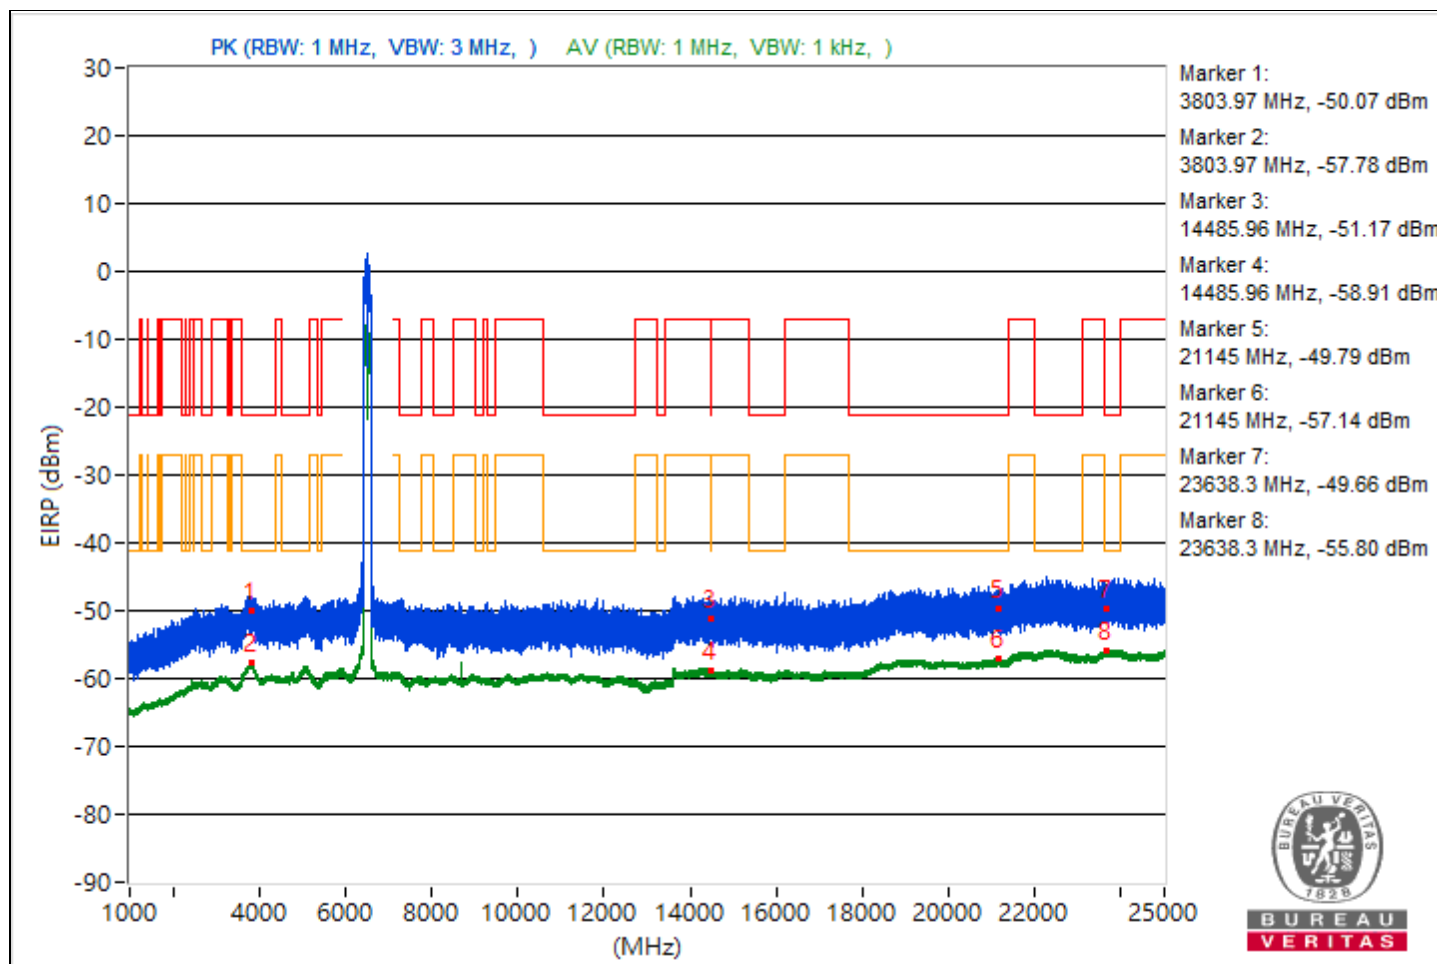


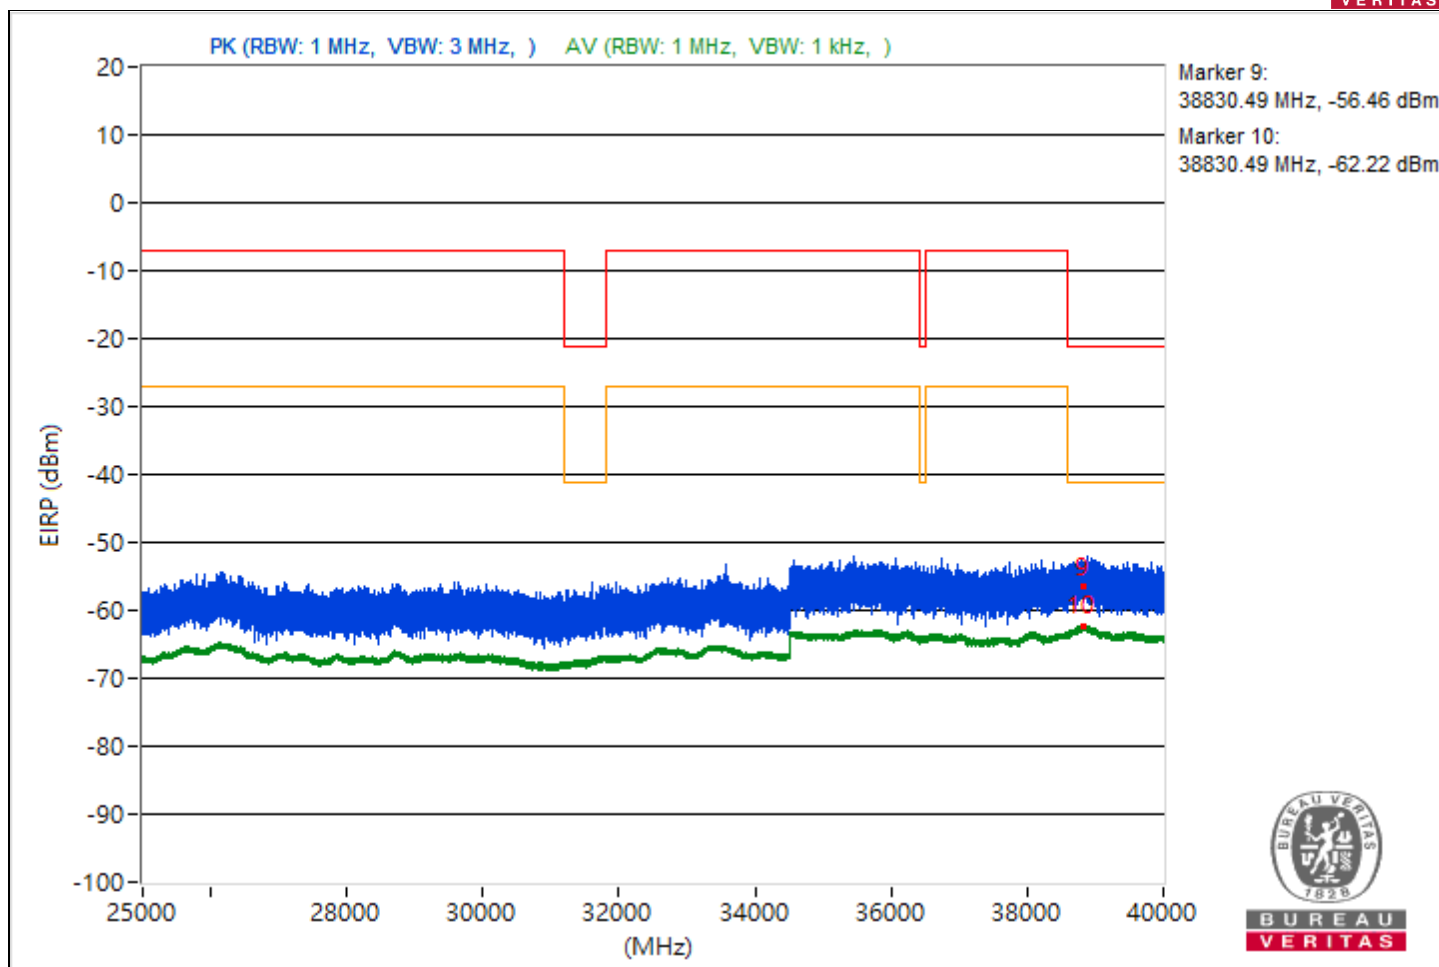


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3823.88	46.34 PK	74	-27.66	-57.58	-56.22	4.92	-48.92
2	3823.88	37.34 AV	54	-16.66	-66.25	-65.49	4.92	-57.92
3	14486.4	45.34 PK	74	-28.66	-59.3	-56.76	4.92	-49.92
4	14486.4	36.48 AV	54	-17.52	-66.84	-66.59	4.92	-58.78
5	21154.9	45.35 PK	74	-28.65	-58.35	-57.38	4.92	-49.91
6	21154.9	37.93 AV	54	-16.07	-65.77	-64.8	4.92	-57.33
7	22306	46.38 PK	74	-27.62	-57.6	-56.13	4.92	-48.88
8	22306	39.53 AV	54	-14.47	-63.3	-64.04	4.92	-55.73
9	38800.62	39.86 PK	74	-34.14	-62.46	-64.42	4.92	-55.4
10	38800.62	33.14 AV	54	-20.86	-70.19	-69.92	4.92	-62.12

Note: Margin value = Emission Level - Limit value

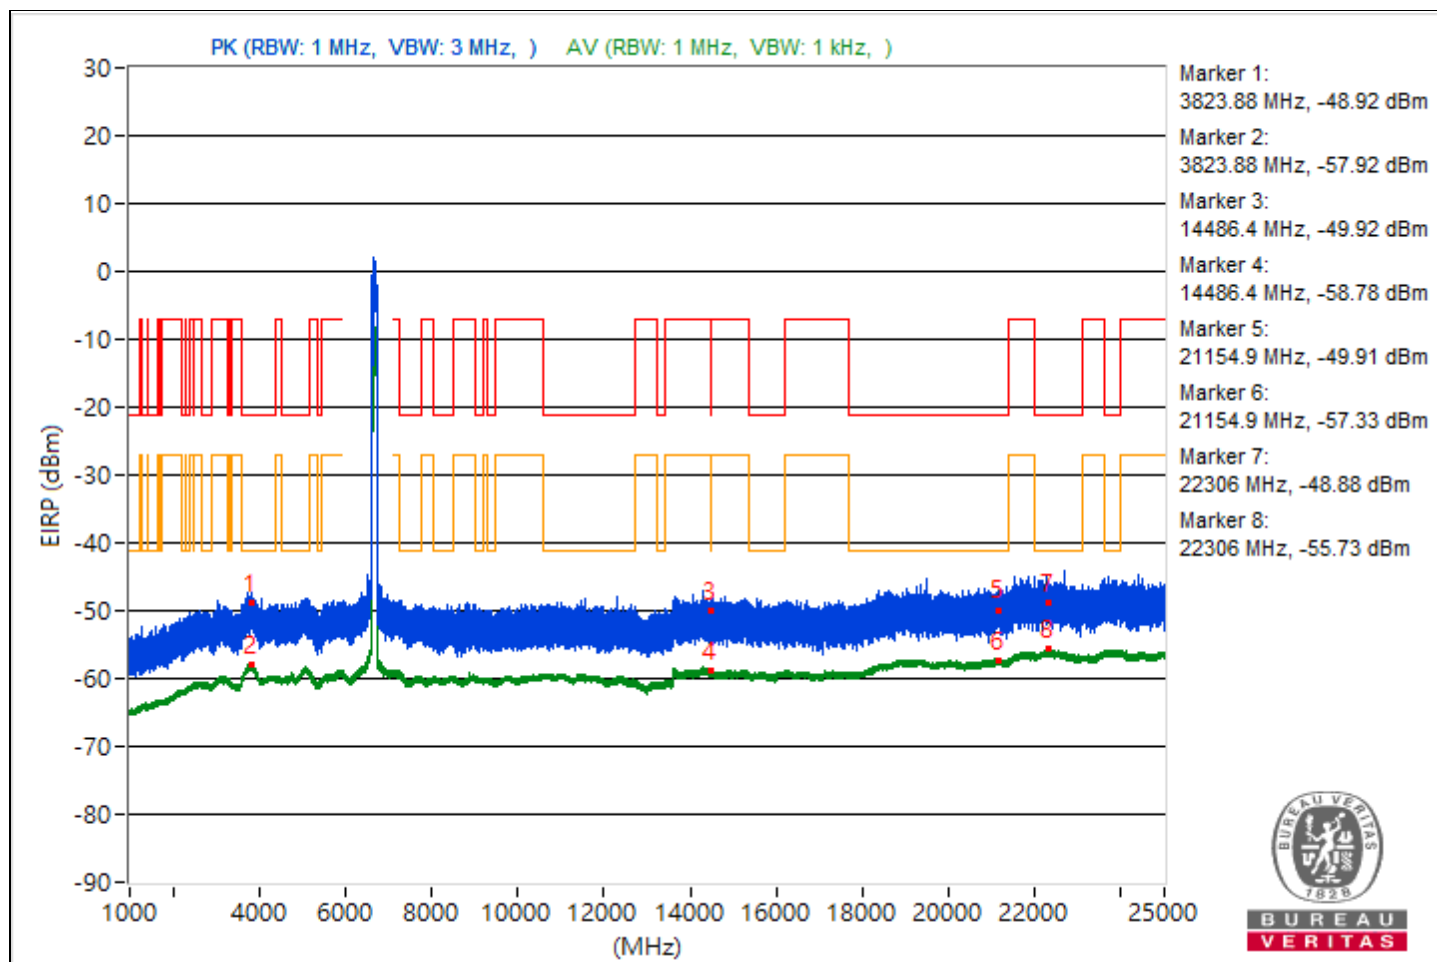


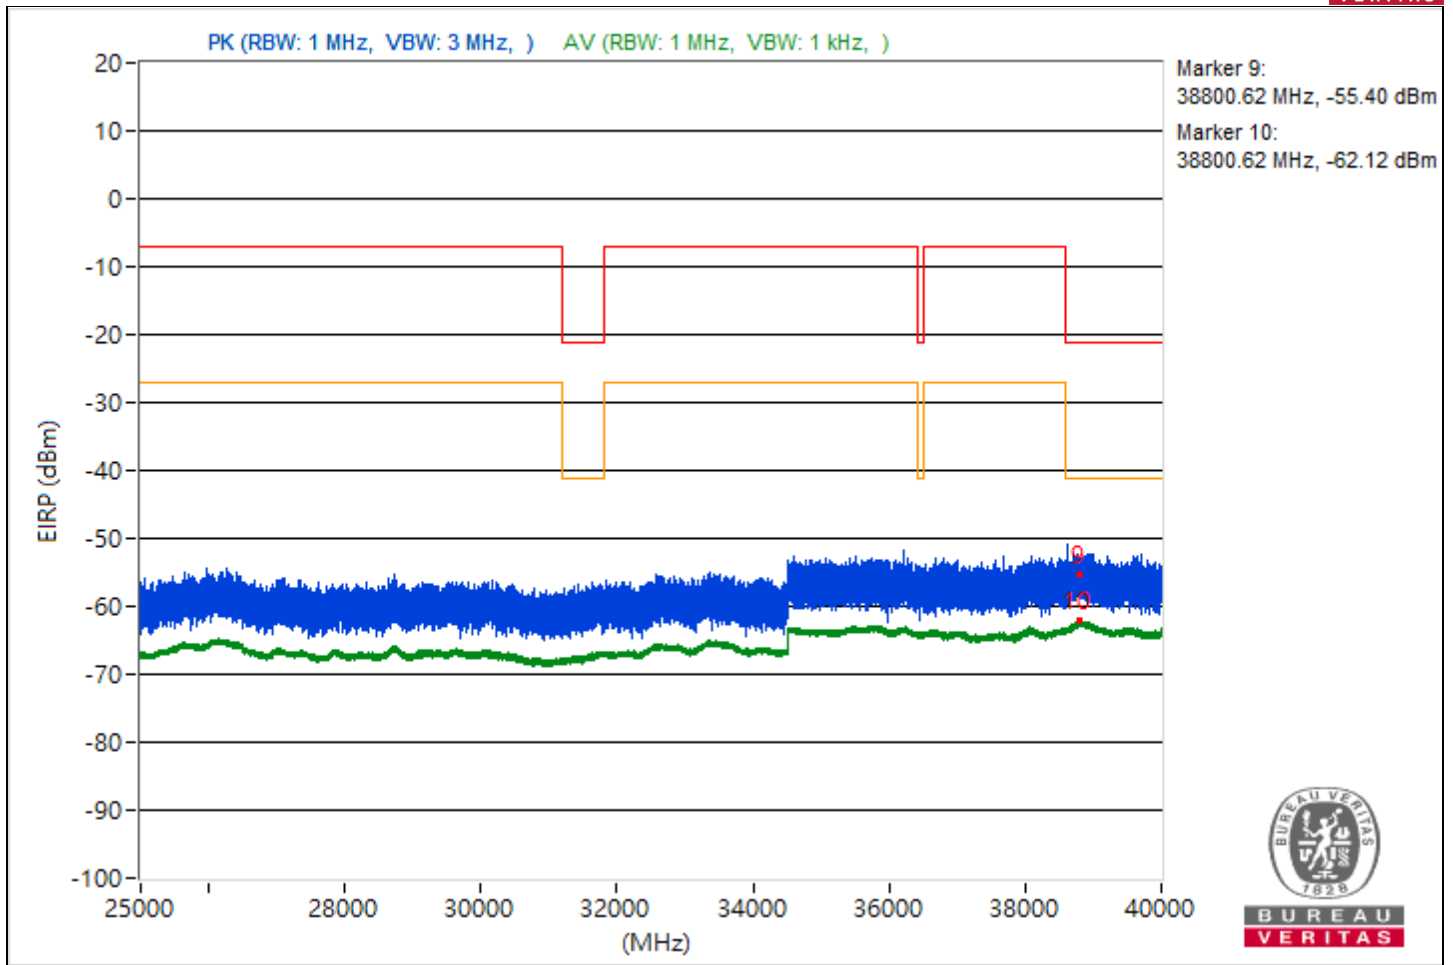


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.01	45.16 PK	74	-28.84	-58.23	-57.84	4.92	-50.1
2	3787.01	37.34 AV	54	-16.66	-66.08	-65.64	4.92	-57.92
3	7272.31	45.21 PK	74	-28.79	-59.53	-56.85	4.92	-50.05
4	7272.31	36.85 AV	54	-17.15	-65.96	-66.76	4.92	-58.41
5	21151.2	44.62 PK	74	-29.38	-58.53	-58.61	4.92	-50.64
6	21151.2	38.26 AV	54	-15.74	-64.79	-65.08	4.92	-57
7	23682.7	48.23 PK	74	-25.77	-53.5	-57.17	4.92	-47.03
8	23682.7	39.61 AV	54	-14.39	-63.89	-63.28	4.92	-55.65
9	38799.64	37.08 PK	74	-36.92	-66.63	-65.65	4.92	-58.18
10	38799.64	33.06 AV	54	-20.94	-70.42	-69.86	4.92	-62.2

Note: Margin value = Emission Level - Limit value

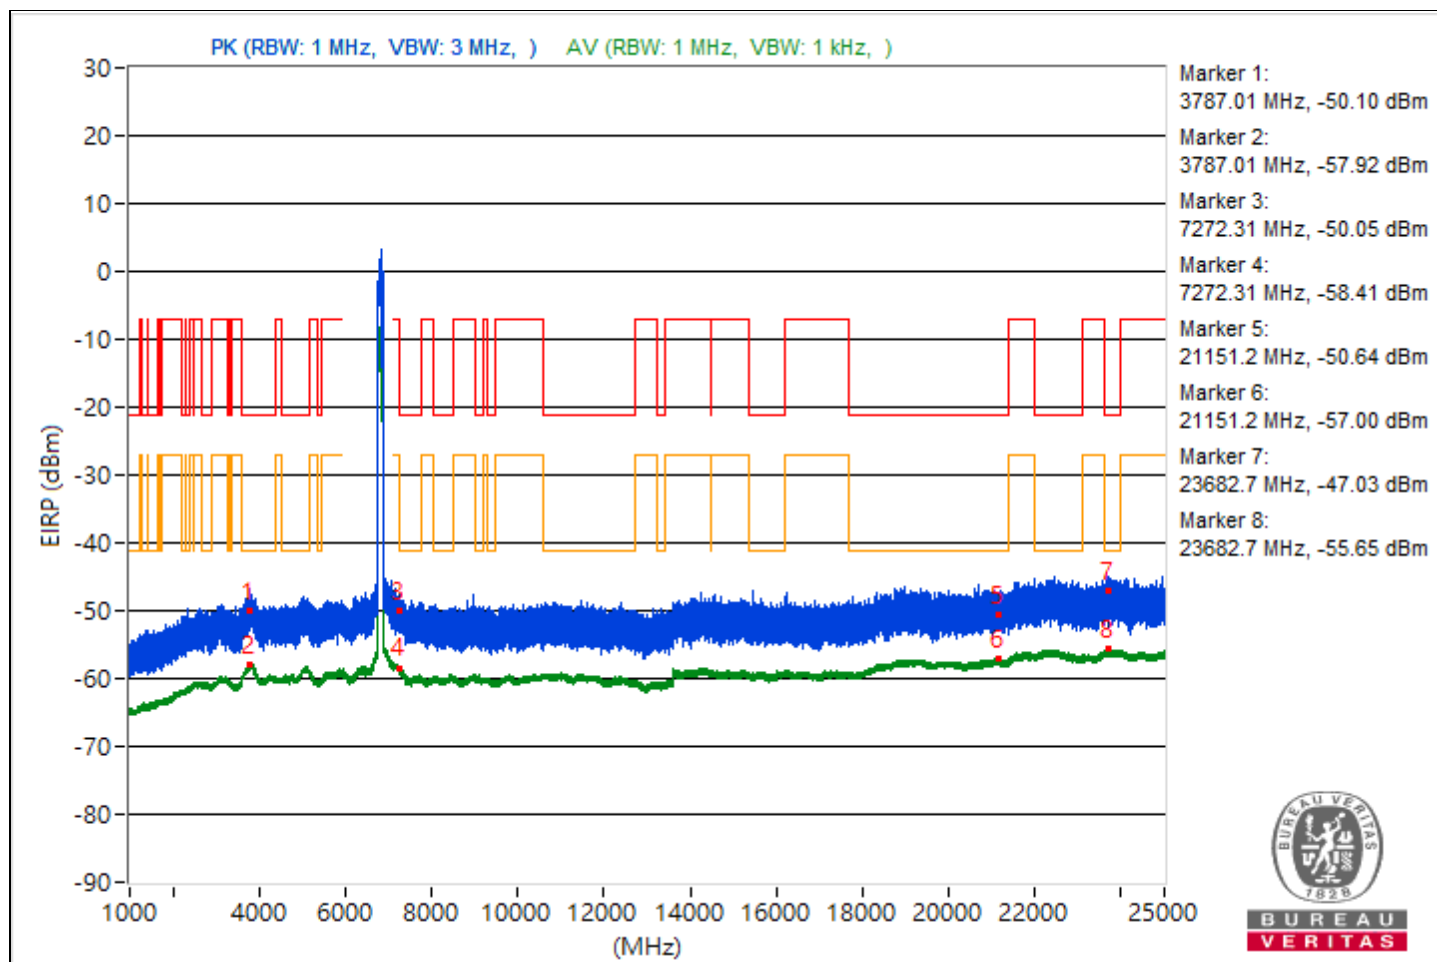


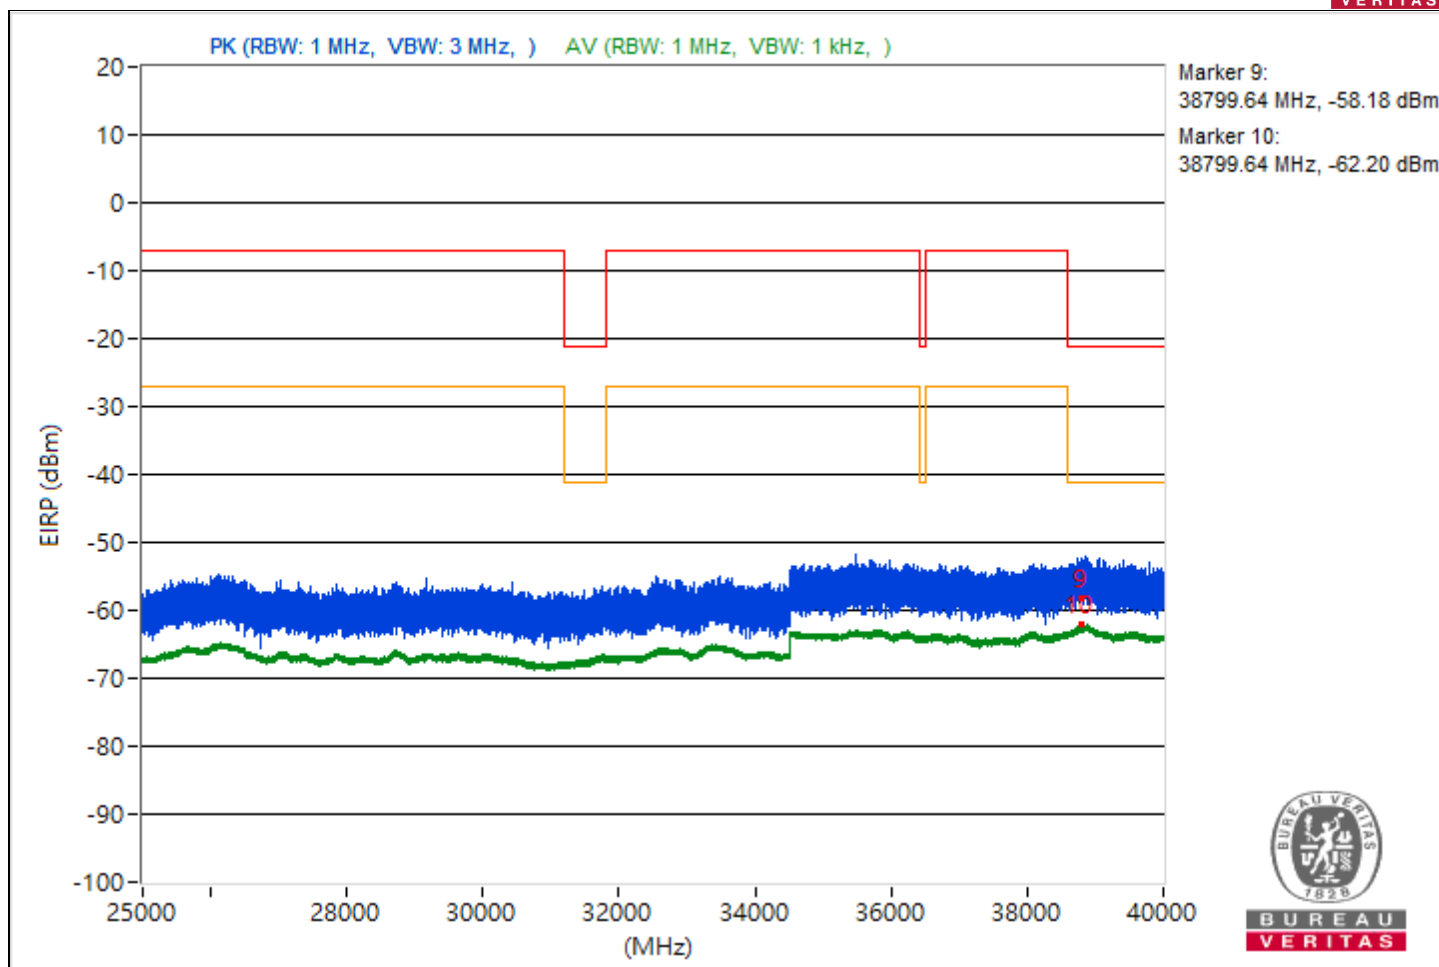


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.82	46.3 PK	74	-27.7	-56.98	-56.81	4.92	-48.96
2	3811.82	37.25 AV	54	-16.75	-65.58	-66.33	4.92	-58.01
3	7259.94	44.46 PK	74	-29.54	-59.24	-58.27	4.92	-50.8
4	7259.94	36.98 AV	54	-17.02	-66.43	-66	4.92	-58.28
5	21127.9	43.76 PK	74	-30.24	-59.47	-59.4	4.92	-51.5
6	21127.9	38.06 AV	54	-15.94	-64.87	-65.4	4.92	-57.2
7	23760.9	44.86 PK	74	-29.14	-58.41	-58.25	4.92	-50.4
8	23760.9	39.42 AV	54	-14.58	-64.16	-63.42	4.92	-55.84
9	38816.8	35.86 PK	74	-38.14	-67.59	-67.09	4.92	-59.4
10	38816.8	33.06 AV	54	-20.94	-69.8	-70.49	4.92	-62.2

Note: Margin value = Emission Level - Limit value

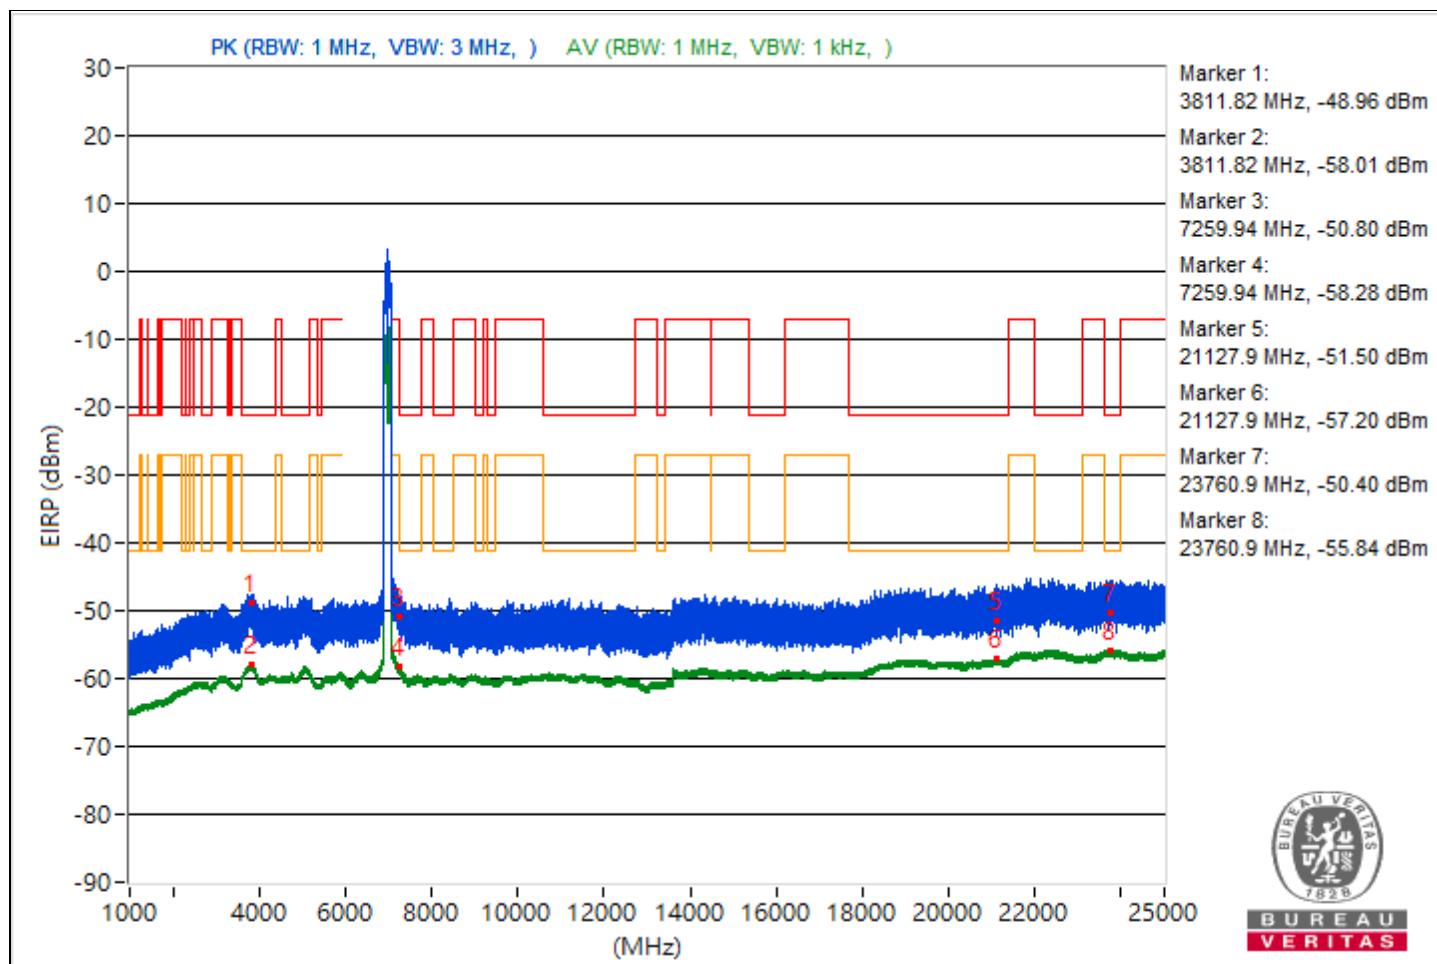


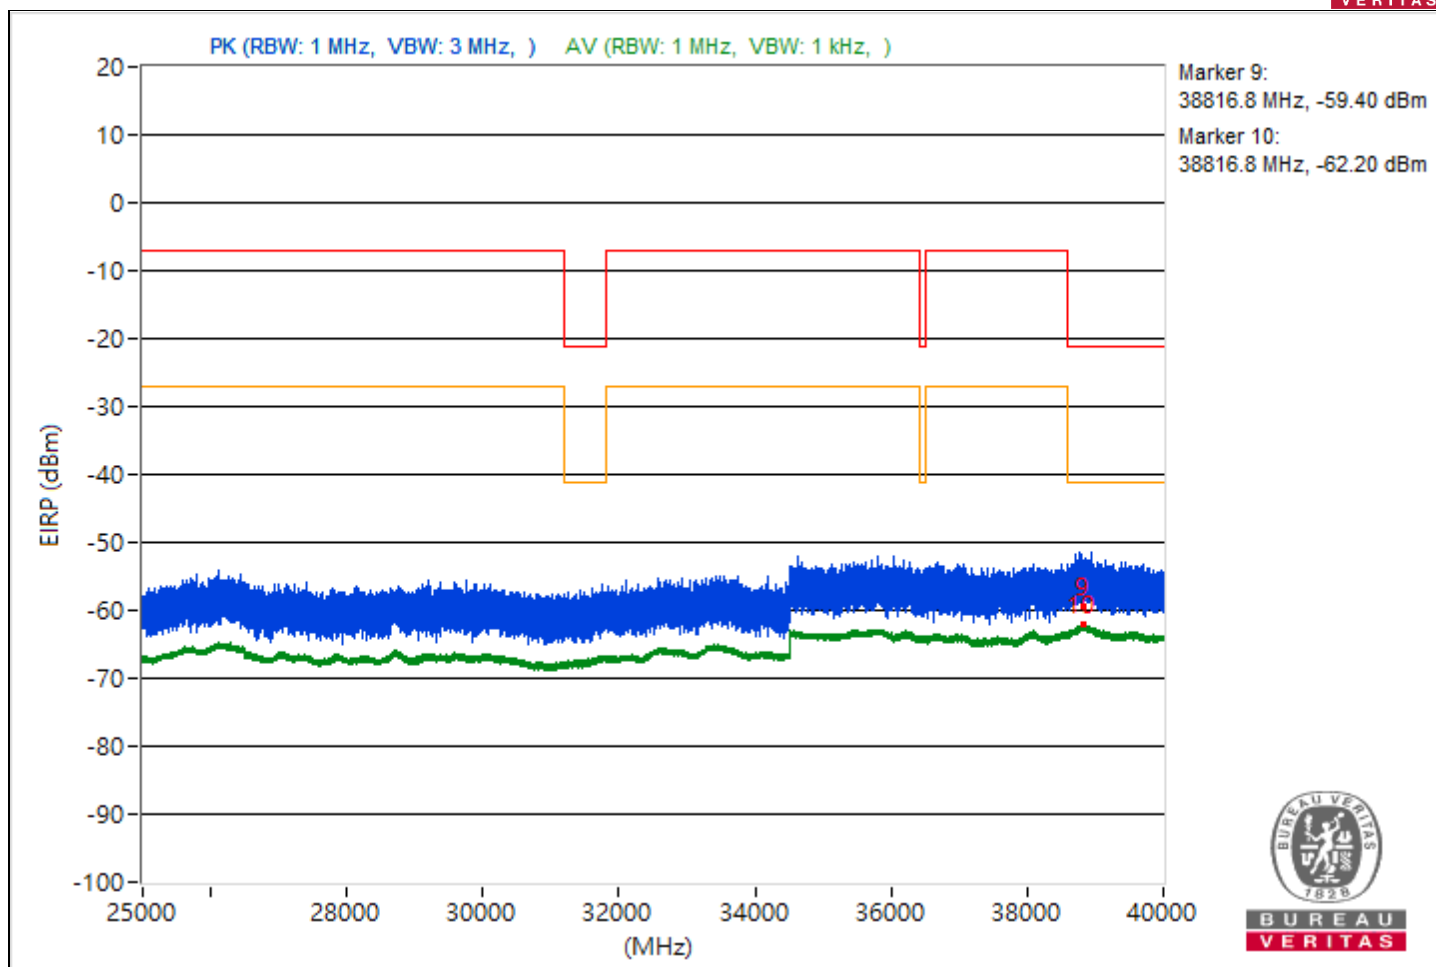


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.53	46.03 PK	74	-27.97	-57.9	-56.52	4.92	-49.23
2	3813.53	37.6 AV	54	-16.4	-65.15	-66.09	4.92	-57.66
3	14485.42	43.33 PK	74	-30.67	-61.83	-58.51	4.92	-51.93
4	14485.42	36.78 AV	54	-17.22	-66.3	-66.52	4.92	-58.48
5	21398.4	44.63 PK	74	-29.37	-57.88	-59.36	4.92	-50.63
6	21398.4	38.54 AV	54	-15.46	-65.09	-64.25	4.92	-56.72
7	22254.2	47.73 PK	74	-26.27	-54.23	-57.16	4.92	-47.53
8	22254.2	39.8 AV	54	-14.2	-63.03	-63.78	4.92	-55.46
9	38836.53	39.27 PK	74	-34.73	-62.62	-65.78	4.92	-55.99
10	38836.53	33.27 AV	54	-20.73	-69.49	-70.39	4.92	-61.99

Note: Margin value = Emission Level - Limit value

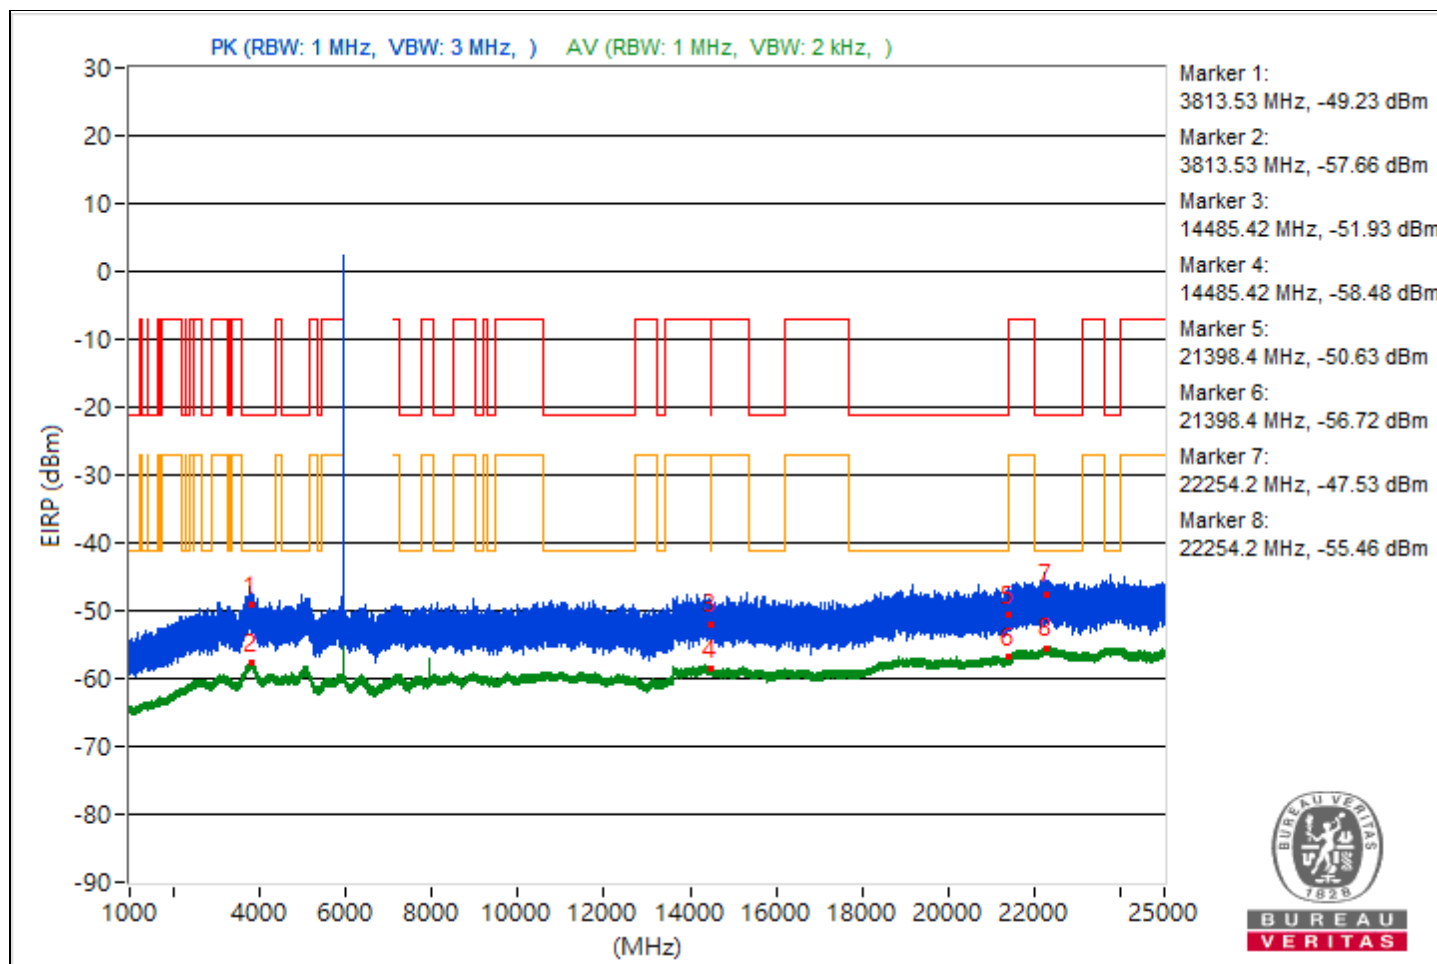


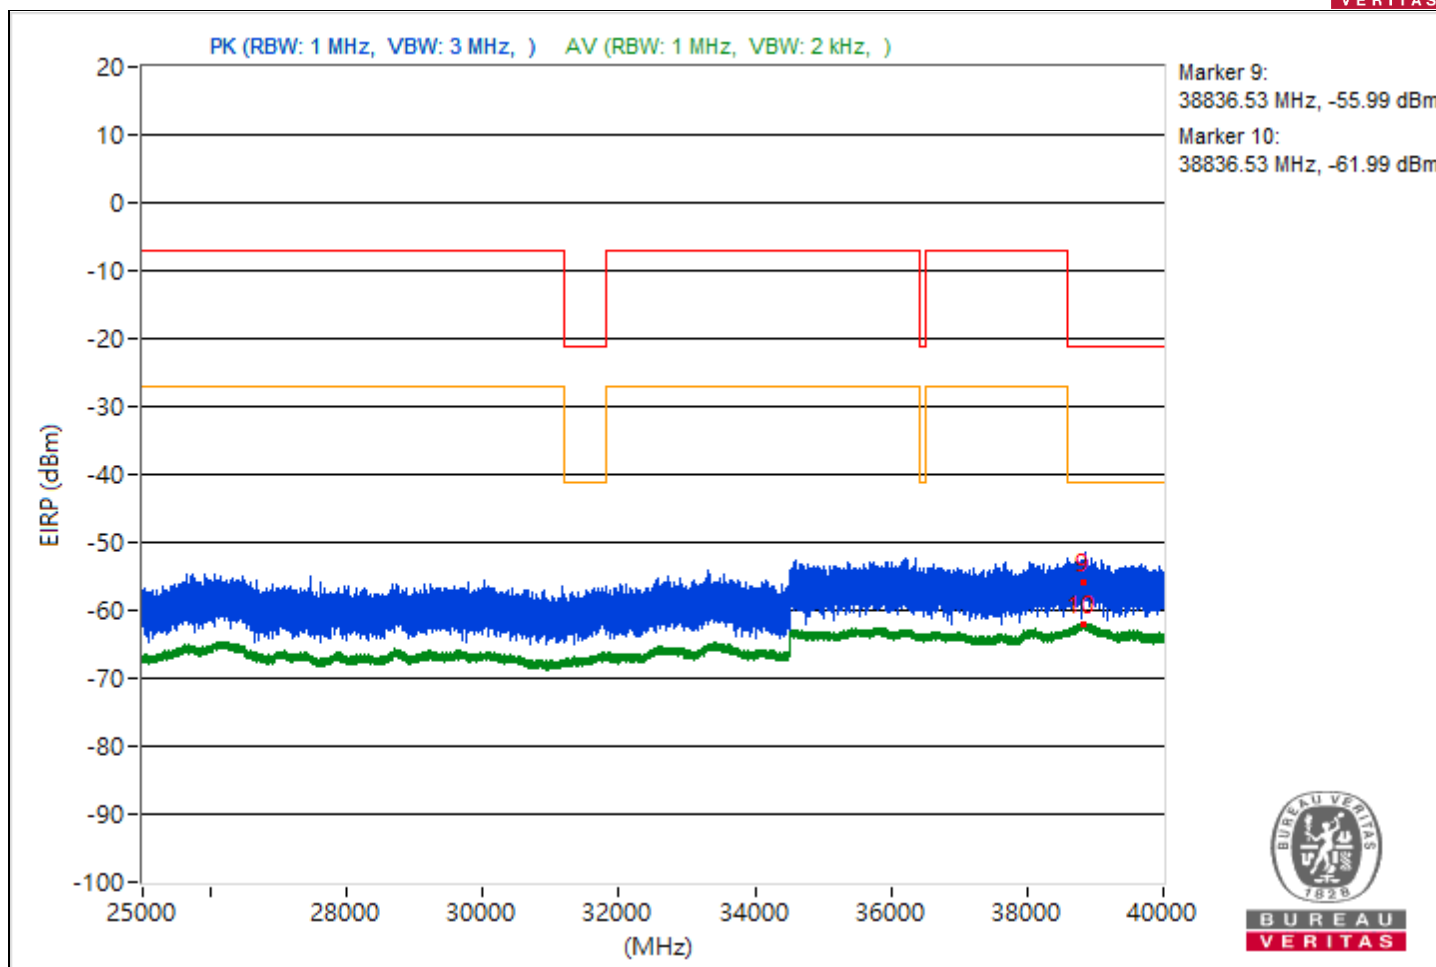


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3799.46	45.86 PK	74	-28.14	-59.64	-55.83	4.92	-49.4
2	3799.46	37.58 AV	54	-16.42	-65.36	-65.86	4.92	-57.68
3	14497.78	43.43 PK	74	-30.57	-61.73	-58.41	4.92	-51.83
4	14497.78	36.62 AV	54	-17.38	-66.18	-67.01	4.92	-58.64
5	21122.6	46.92 PK	74	-27.08	-56.18	-56.37	4.92	-48.34
6	21122.6	38.46 AV	54	-15.54	-64.35	-65.16	4.92	-56.8
7	23779.4	46.34 PK	74	-27.66	-58.21	-55.81	4.92	-48.92
8	23779.4	39.79 AV	54	-14.21	-64.01	-62.87	4.92	-55.47
9	38859.56	41.35 PK	74	-32.65	-61.64	-62.05	4.92	-53.91
10	38859.56	33.54 AV	54	-20.46	-69.83	-69.47	4.92	-61.72

Note: Margin value = Emission Level - Limit value

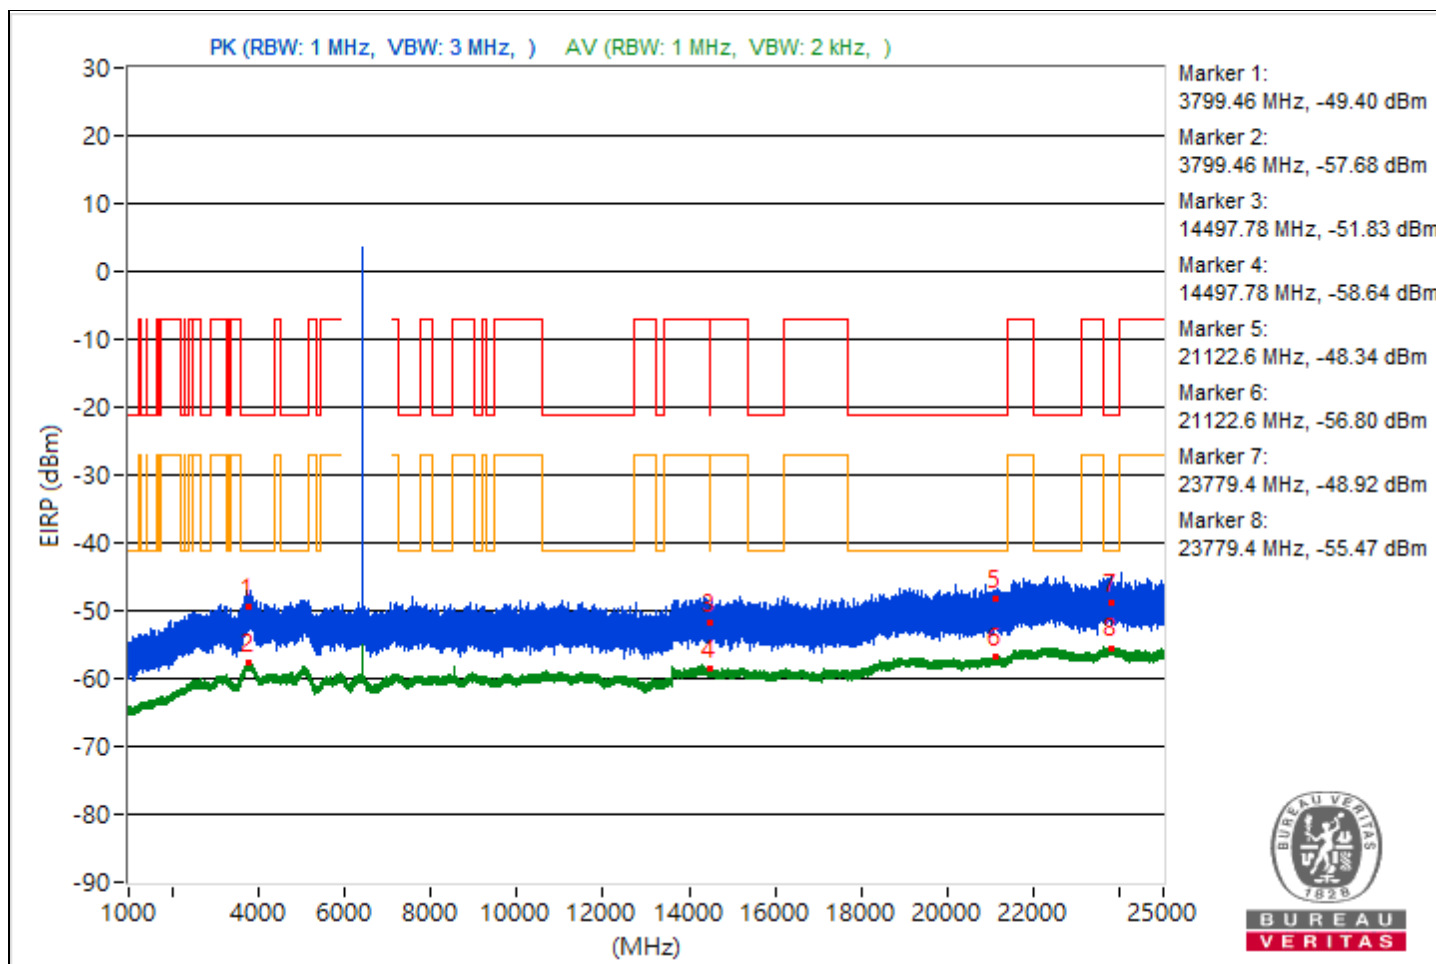


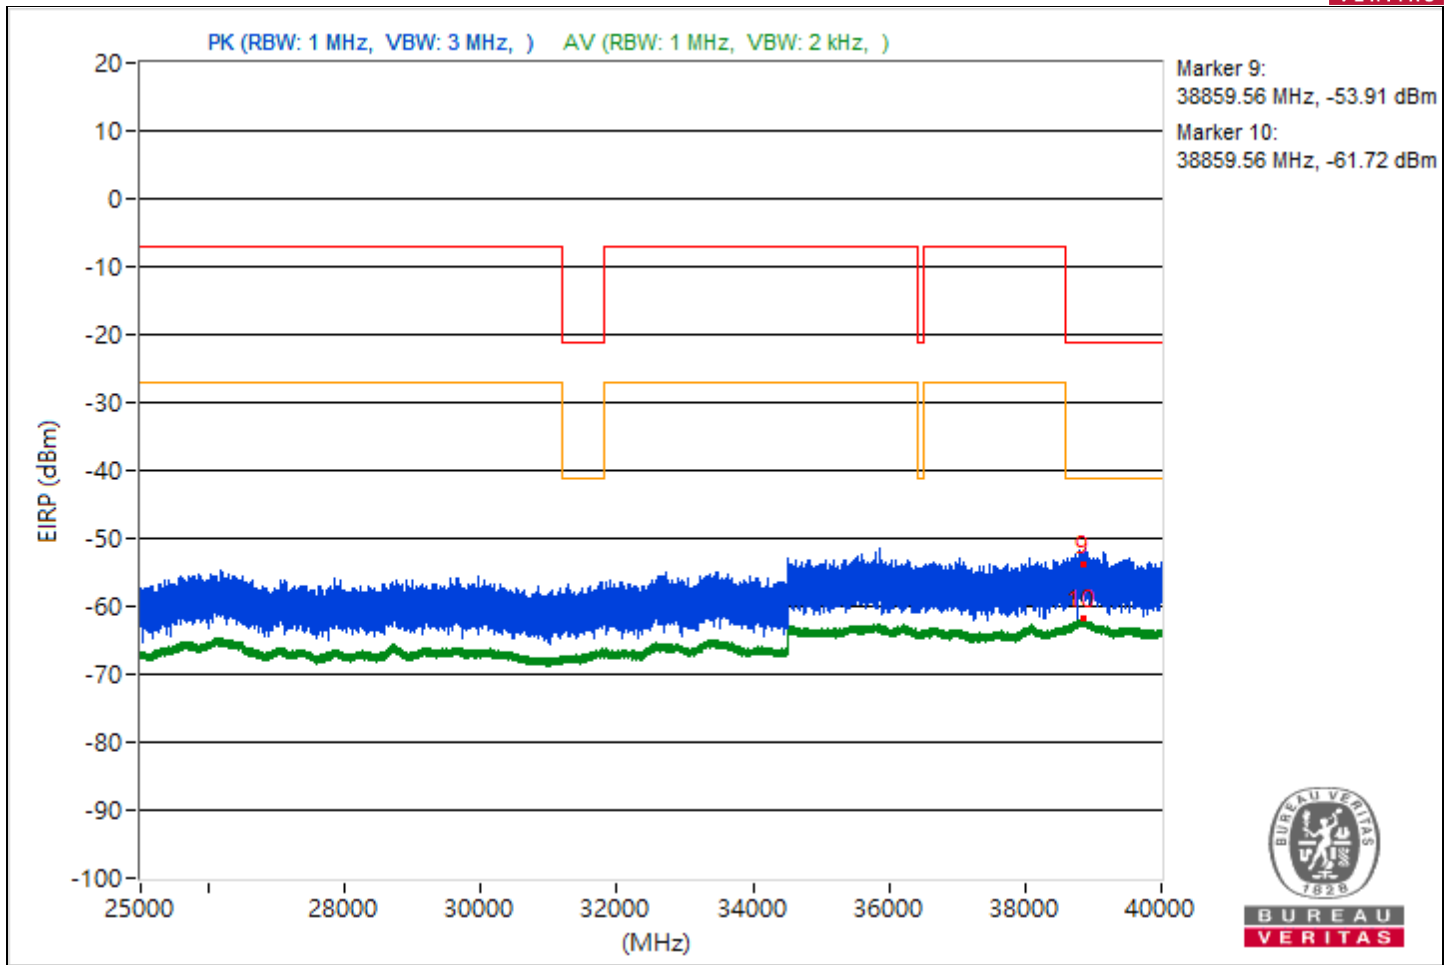


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3818.98	44.01 PK	74	-29.99	-60.26	-58.32	4.92	-51.25
2	3818.98	37.72 AV	54	-16.28	-65.52	-65.42	4.92	-57.54
3	14481.42	42.97 PK	74	-31.03	-59.82	-60.66	4.92	-52.29
4	14481.42	36.67 AV	54	-17.33	-66.79	-66.26	4.92	-58.59
5	21074.4	45.51 PK	74	-28.49	-59.58	-56.37	4.92	-49.75
6	21074.4	38.45 AV	54	-15.55	-65.16	-64.36	4.92	-56.81
7	23720.2	47.39 PK	74	-26.61	-55.92	-55.68	4.92	-47.87
8	23720.2	39.88 AV	54	-14.12	-62.76	-63.94	4.92	-55.38
9	38828.8	39.89 PK	74	-34.11	-65.04	-62.06	4.92	-55.37
10	38828.8	33.41 AV	54	-20.59	-70.33	-69.3	4.92	-61.85

Note: Margin value = Emission Level - Limit value

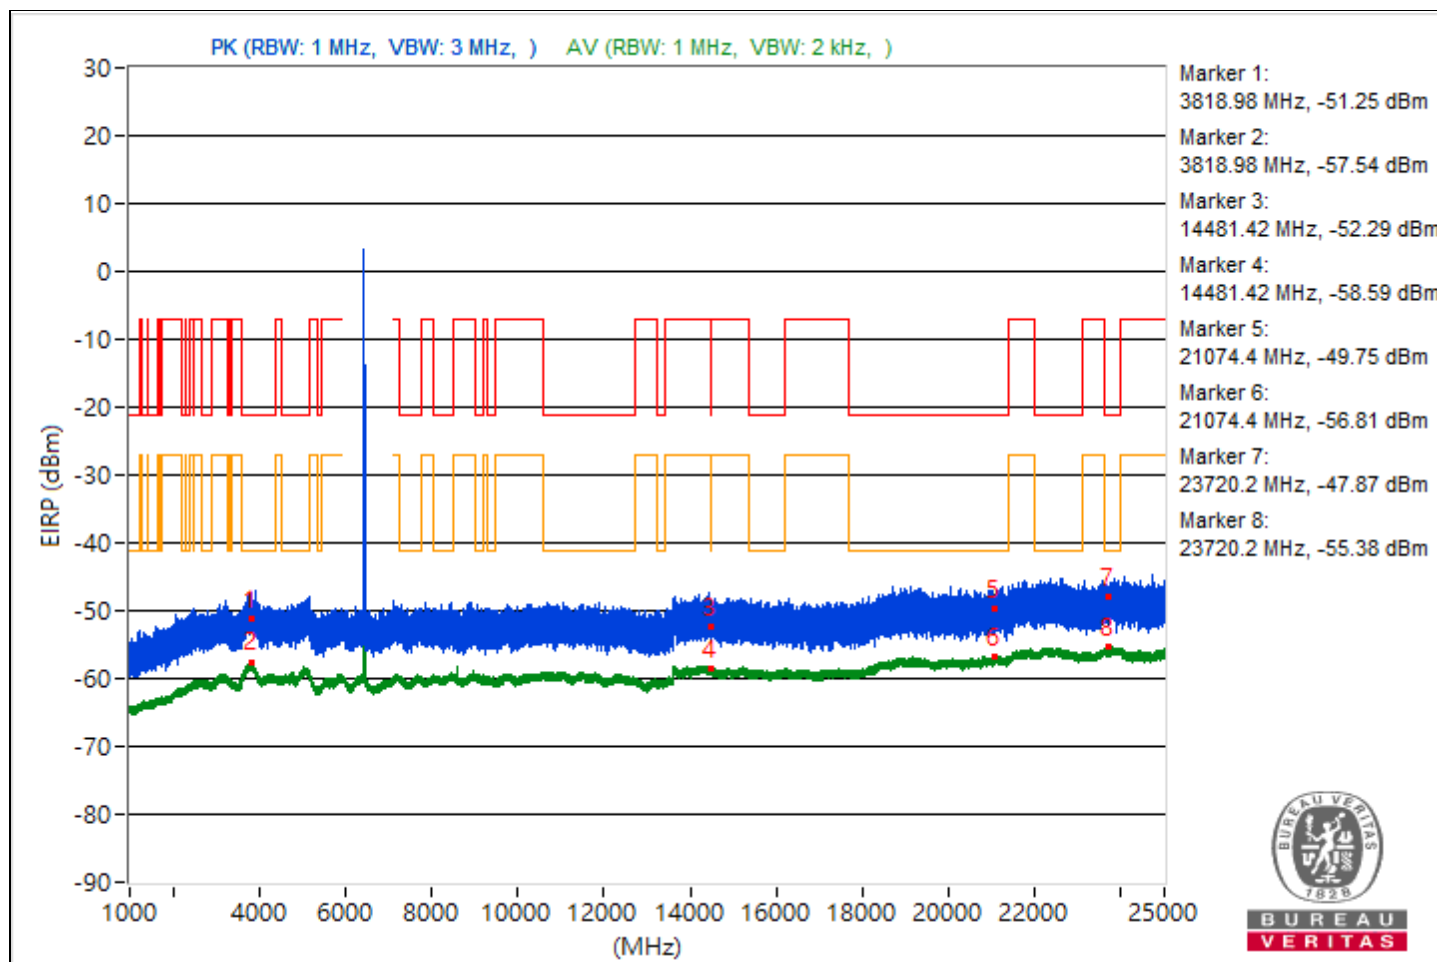


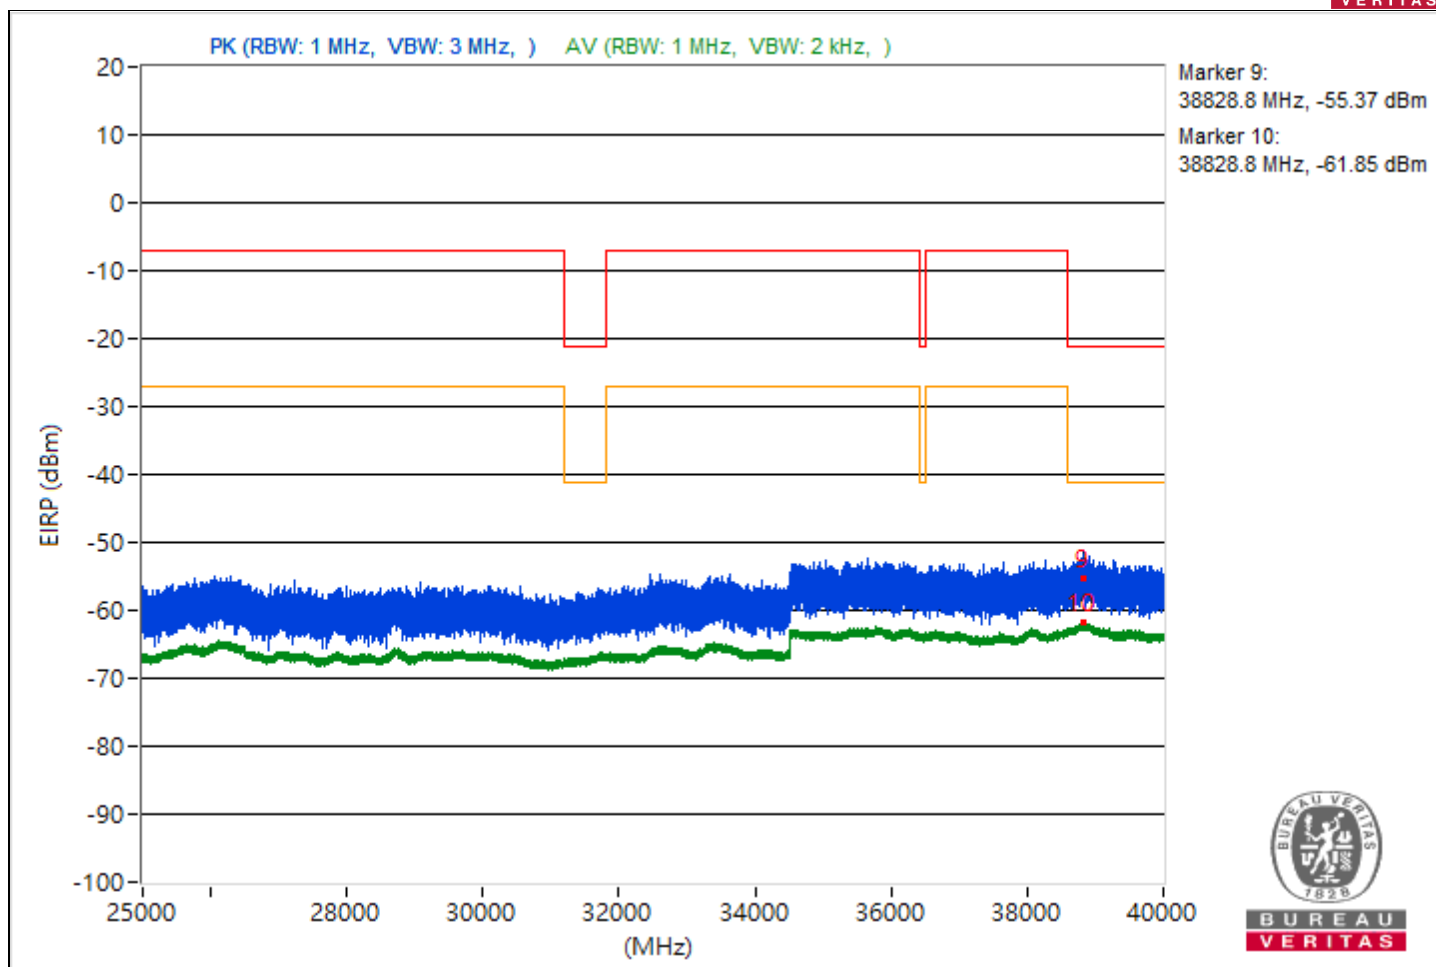


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.07	45.12 PK	74	-28.88	-57.44	-58.81	4.92	-50.14
2	3820.07	37.67 AV	54	-16.33	-65.89	-65.17	4.92	-57.59
3	14479.91	44.77 PK	74	-29.23	-57.68	-59.31	4.92	-50.49
4	14479.91	36.55 AV	54	-17.45	-67.03	-66.28	4.92	-58.71
5	21093.4	44.61 PK	74	-29.39	-58.72	-58.46	4.92	-50.65
6	21093.4	38.54 AV	54	-15.46	-64.98	-64.33	4.92	-56.72
7	22237.5	45.32 PK	74	-28.68	-59.49	-56.69	4.92	-49.94
8	22237.5	39.99 AV	54	-14.01	-62.93	-63.49	4.92	-55.27
9	38802.76	38.18 PK	74	-35.82	-63.45	-67.47	4.92	-57.08
10	38802.76	33.44 AV	54	-20.56	-69.38	-70.16	4.92	-61.82

Note: Margin value = Emission Level - Limit value

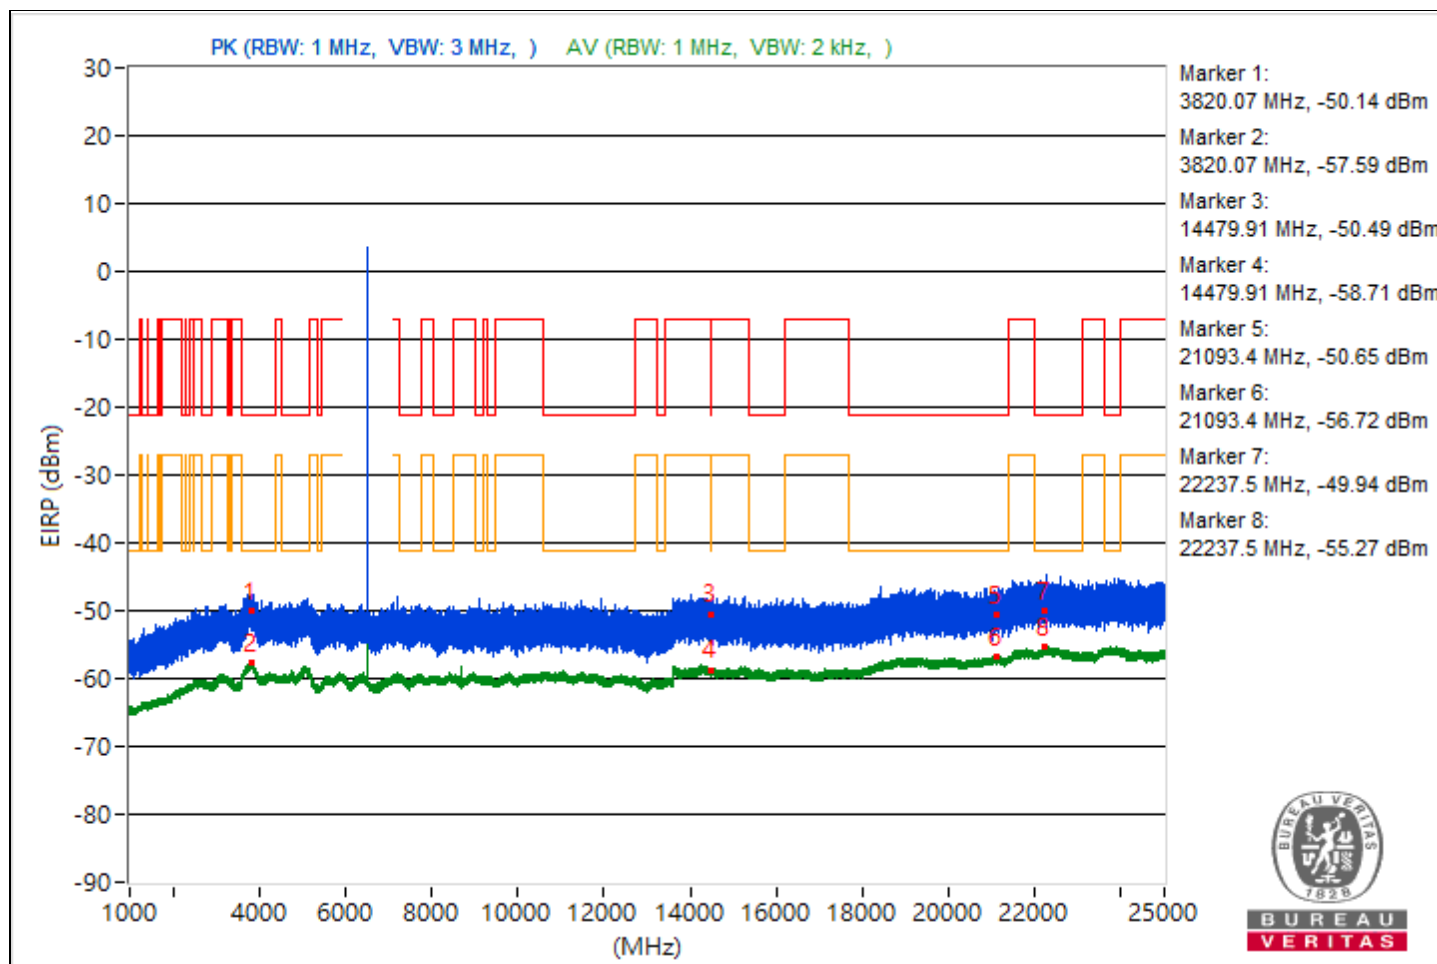


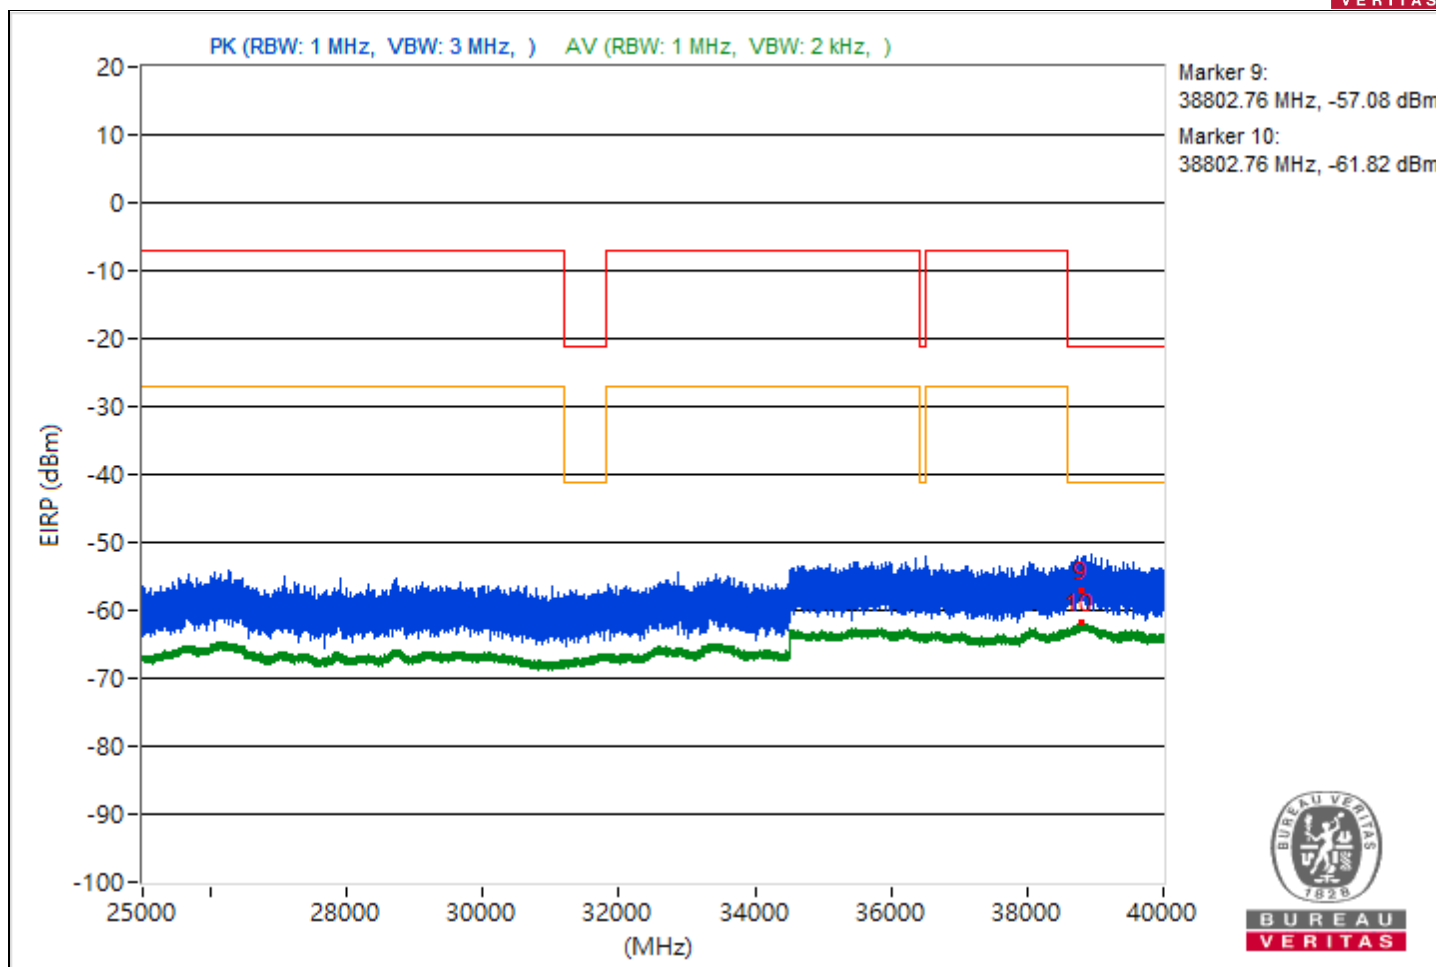


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.93	44.57 PK	74	-29.43	-59.87	-57.64	4.92	-50.69
2	3807.93	37.63 AV	54	-16.37	-65.27	-65.86	4.92	-57.63
3	14476.27	43.33 PK	74	-30.67	-63.53	-57.91	4.92	-51.93
4	14476.27	36.56 AV	54	-17.44	-67.08	-66.23	4.92	-58.7
5	21158.8	44.94 PK	74	-29.06	-59.03	-57.59	4.92	-50.32
6	21158.8	38.34 AV	54	-15.66	-64.26	-65.54	4.92	-56.92
7	22305.9	47.75 PK	74	-26.25	-54.19	-57.18	4.92	-47.51
8	22305.9	39.84 AV	54	-14.16	-63.82	-62.92	4.92	-55.42
9	38848.98	38.3 PK	74	-35.7	-63.87	-66.22	4.92	-56.96
10	38848.98	33.34 AV	54	-20.66	-70.08	-69.63	4.92	-61.92

Note: Margin value = Emission Level - Limit value

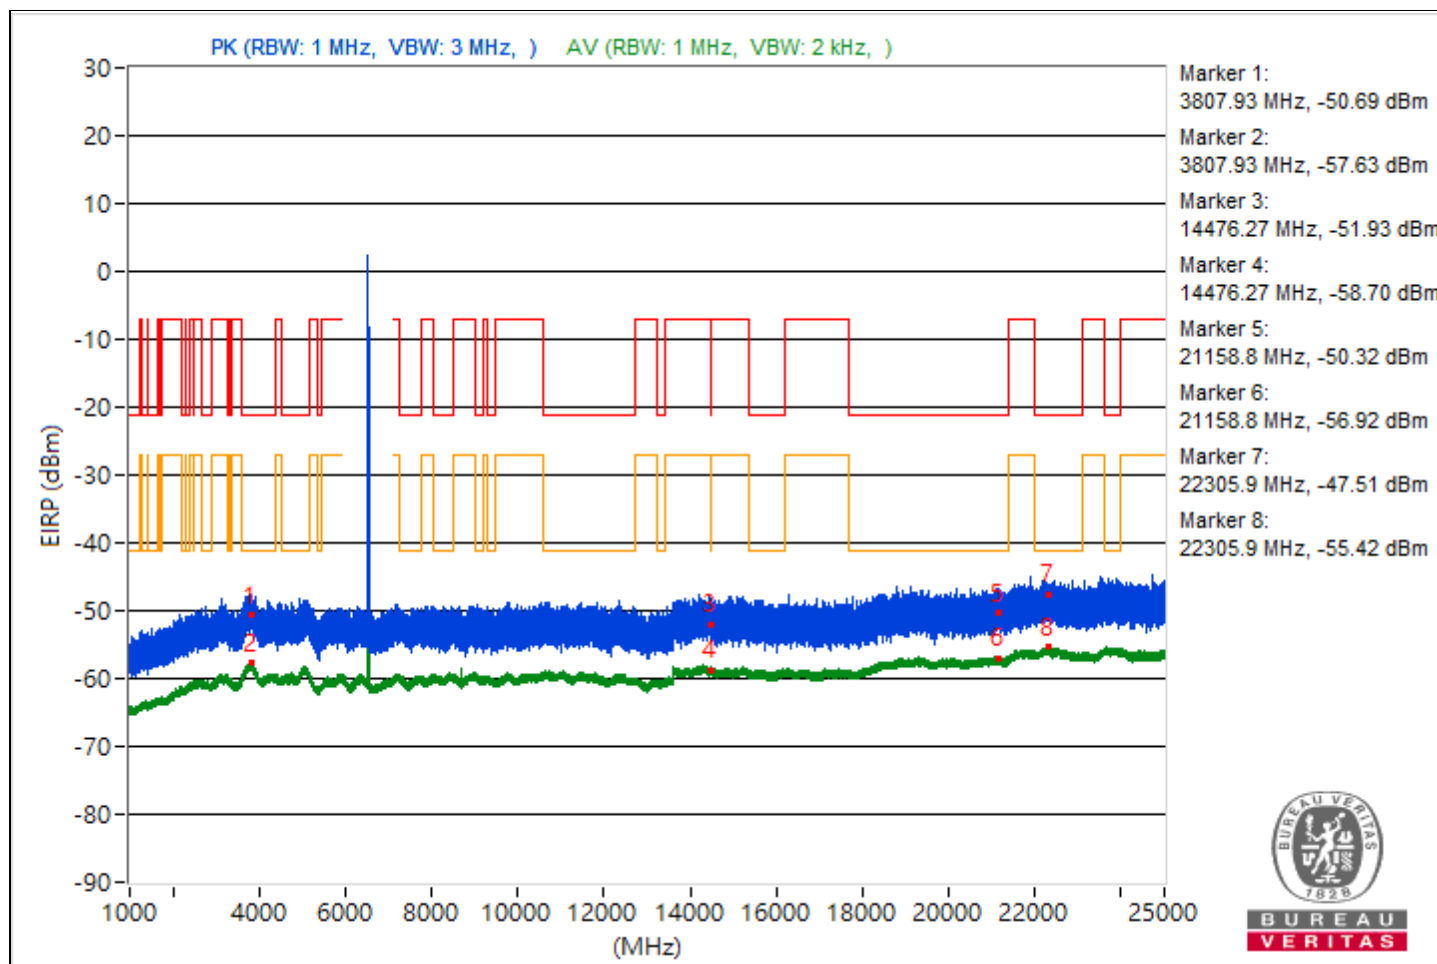


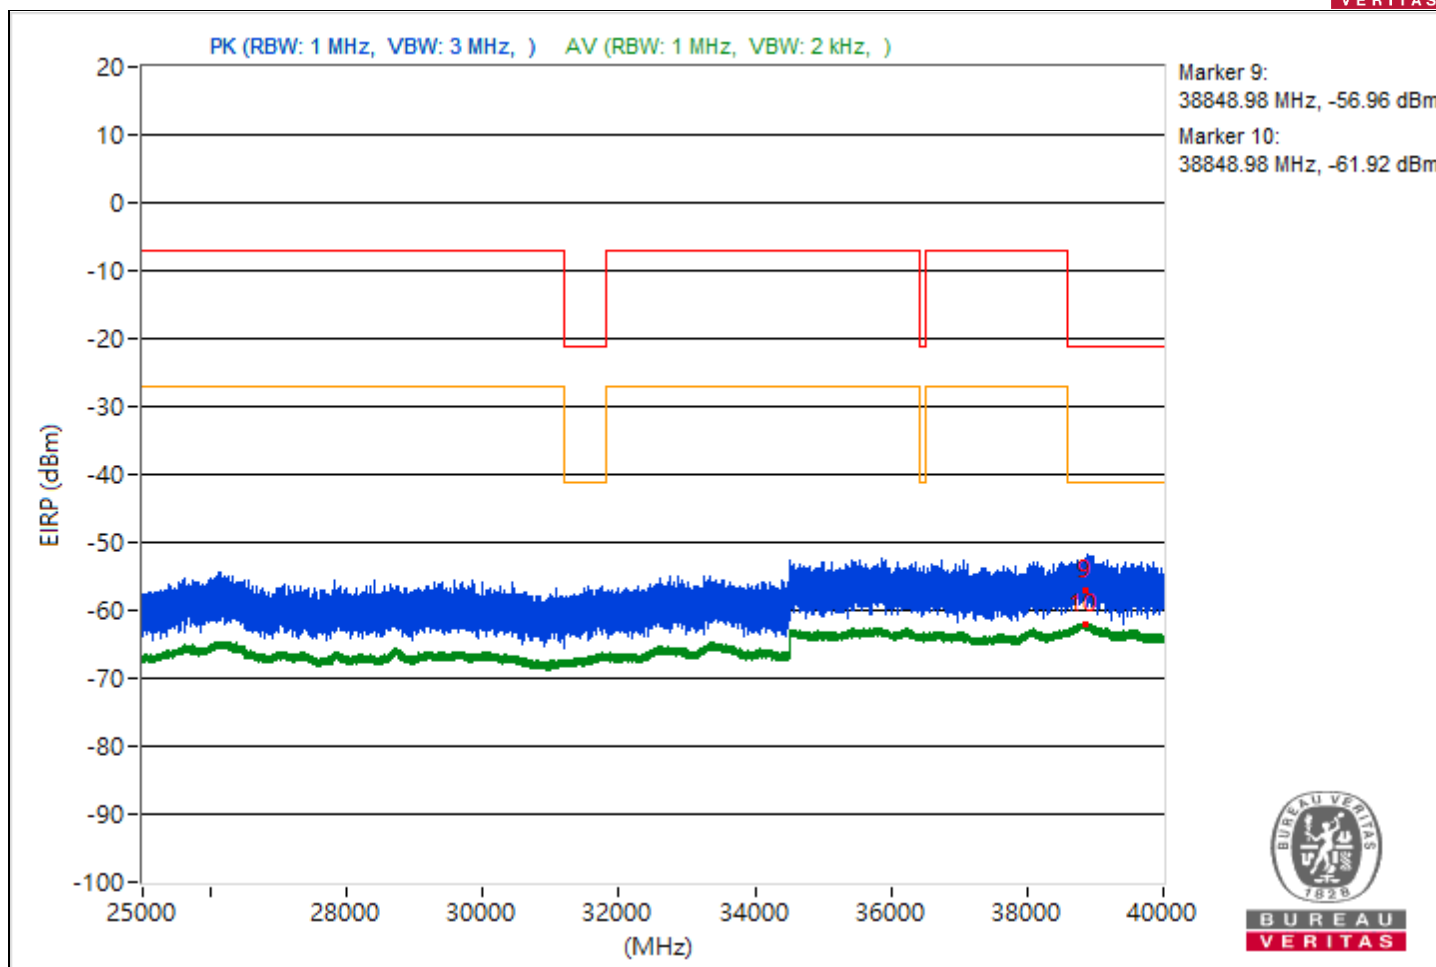


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3823.33	45.59 PK	74	-28.41	-58.32	-56.98	4.92	-49.67
2	3823.33	37.51 AV	54	-16.49	-65.26	-66.15	4.92	-57.75
3	15646.76	42.31 PK	74	-31.69	-60.47	-61.32	4.92	-52.95
4	15646.76	36.71 AV	54	-17.29	-66.83	-66.17	4.92	-58.55
5	21395	45.05 PK	74	-28.95	-58.62	-57.7	4.92	-50.21
6	21395	38.52 AV	54	-15.48	-64.32	-65.04	4.92	-56.74
7	23914.4	46.63 PK	74	-27.37	-56.53	-56.58	4.92	-48.63
8	23914.4	39.79 AV	54	-14.21	-62.91	-63.96	4.92	-55.47
9	38887.82	38.11 PK	74	-35.89	-67.16	-63.67	4.92	-57.15
10	38887.82	33.37 AV	54	-20.63	-69.24	-70.5	4.92	-61.89

Note: Margin value = Emission Level - Limit value

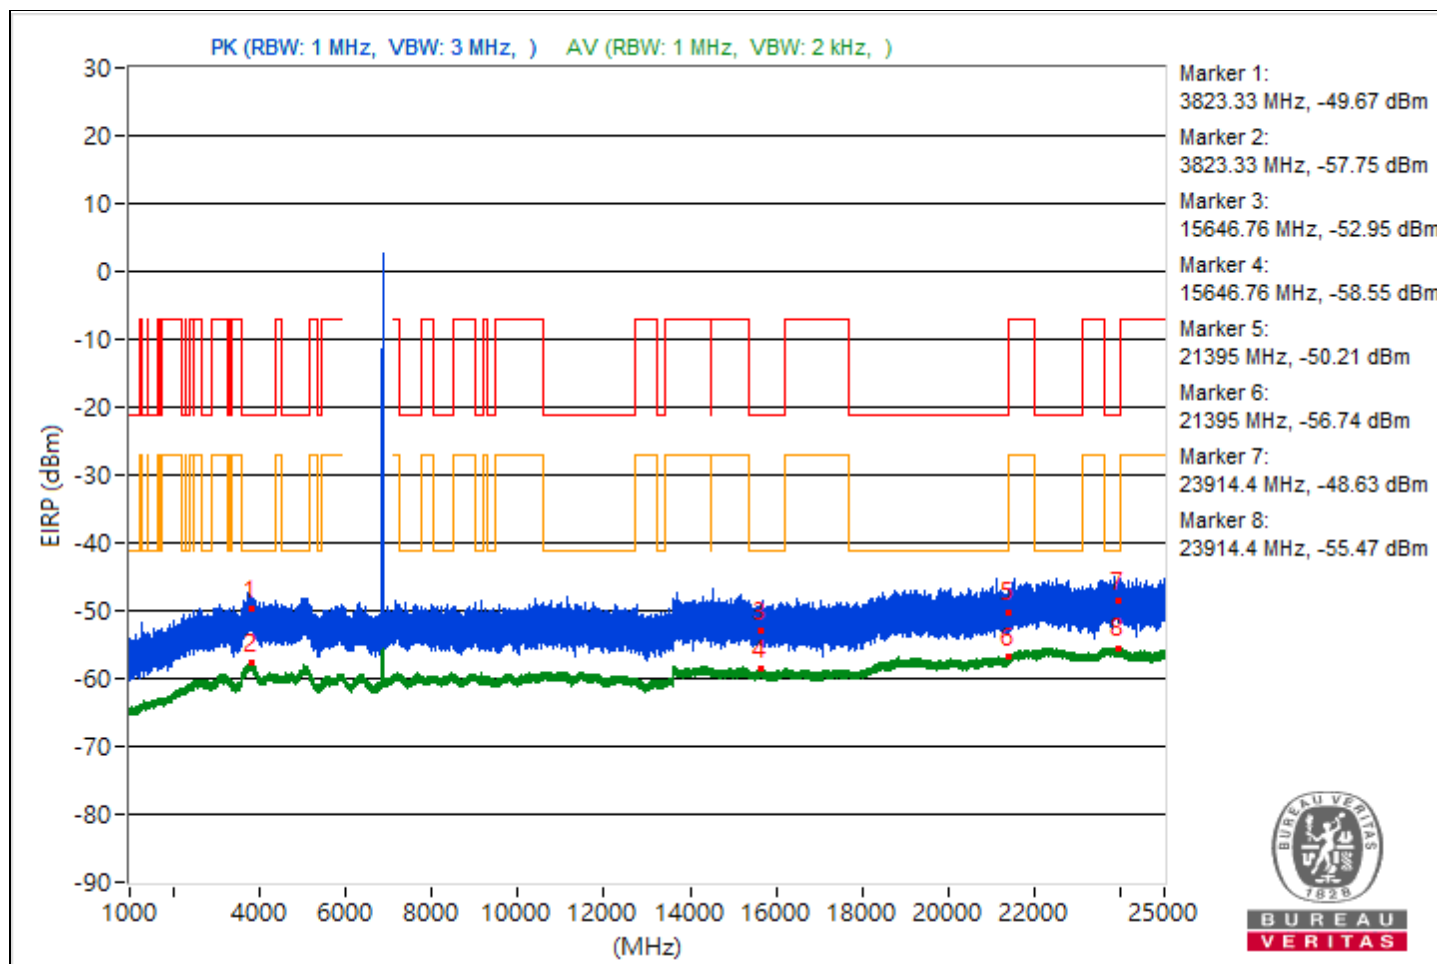


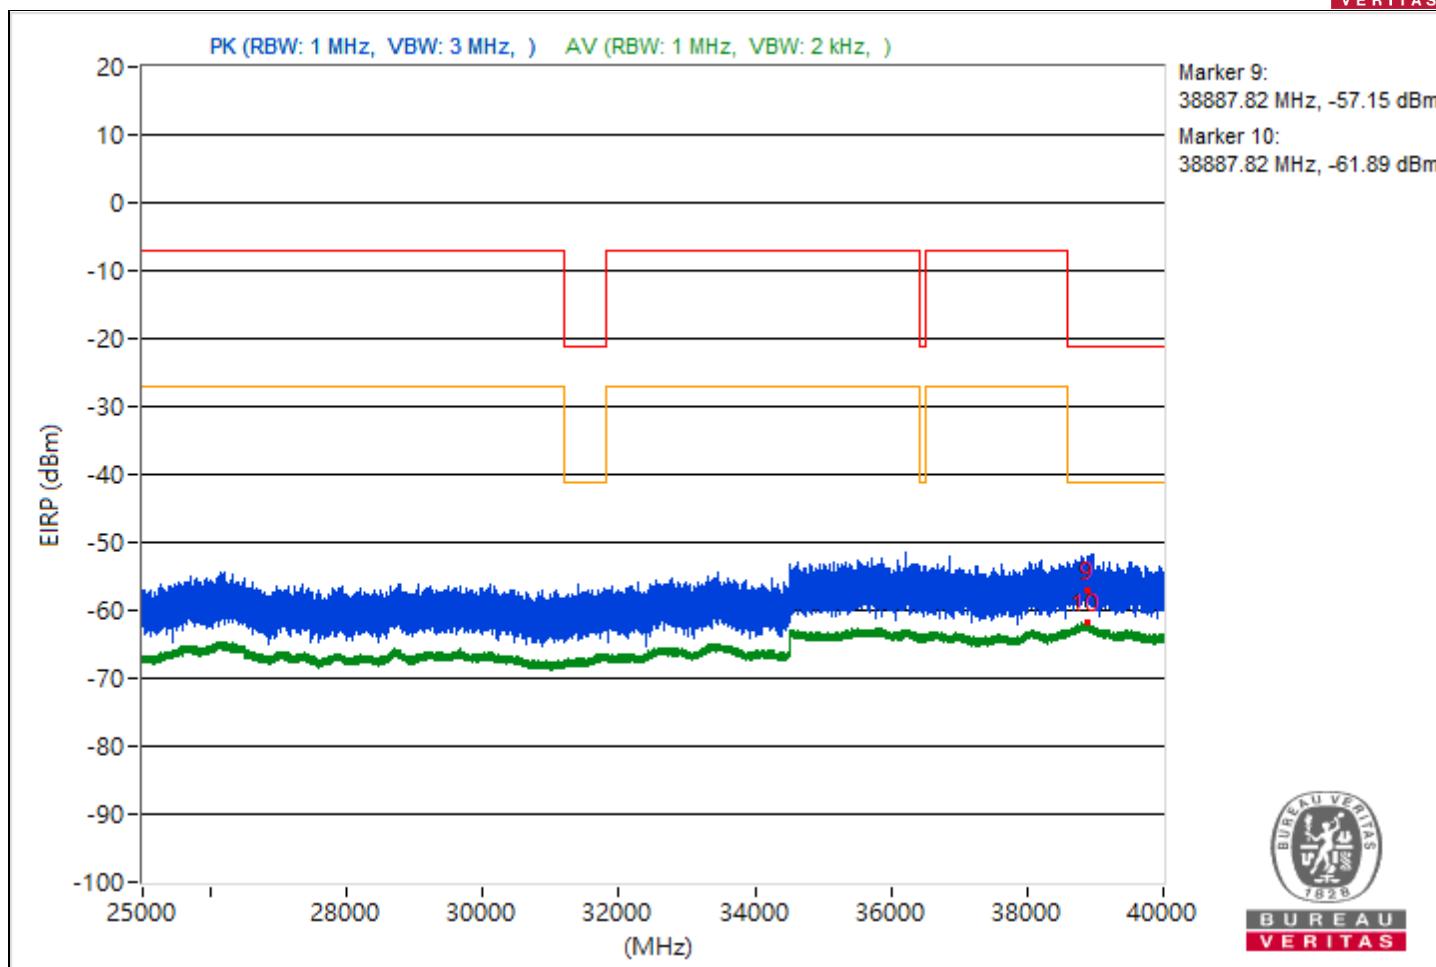


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.81	45.47 PK	74	-28.53	-56.82	-58.86	4.92	-49.79
2	3810.81	37.66 AV	54	-16.34	-65.88	-65.21	4.92	-57.6
3	14480.89	43.94 PK	74	-30.06	-59.27	-59.23	4.92	-51.32
4	14480.89	36.73 AV	54	-17.27	-66.79	-66.15	4.92	-58.53
5	21115.7	44.21 PK	74	-29.79	-58.13	-60.05	4.92	-51.05
6	21115.7	38.5 AV	54	-15.5	-65.02	-64.37	4.92	-56.76
7	23869.2	45.36 PK	74	-28.64	-56.71	-59.34	4.92	-49.9
8	23869.2	39.8 AV	54	-14.2	-63.9	-62.93	4.92	-55.46
9	38823.02	37.79 PK	74	-36.21	-65.54	-65.26	4.92	-57.47
10	38823.02	33.47 AV	54	-20.53	-69.97	-69.47	4.92	-61.79

Note: Margin value = Emission Level - Limit value

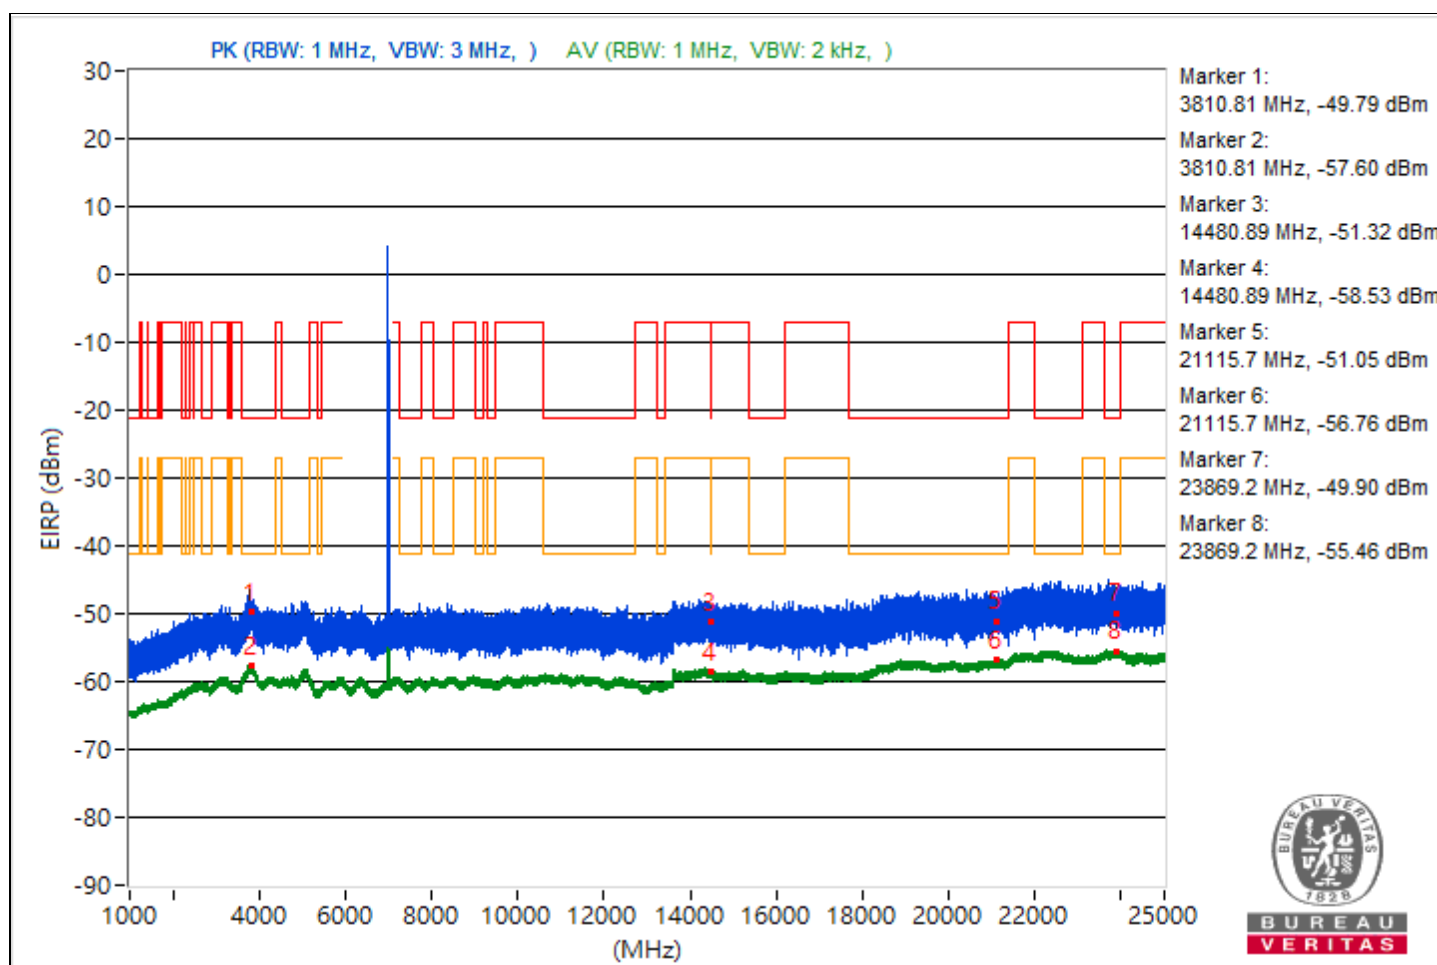


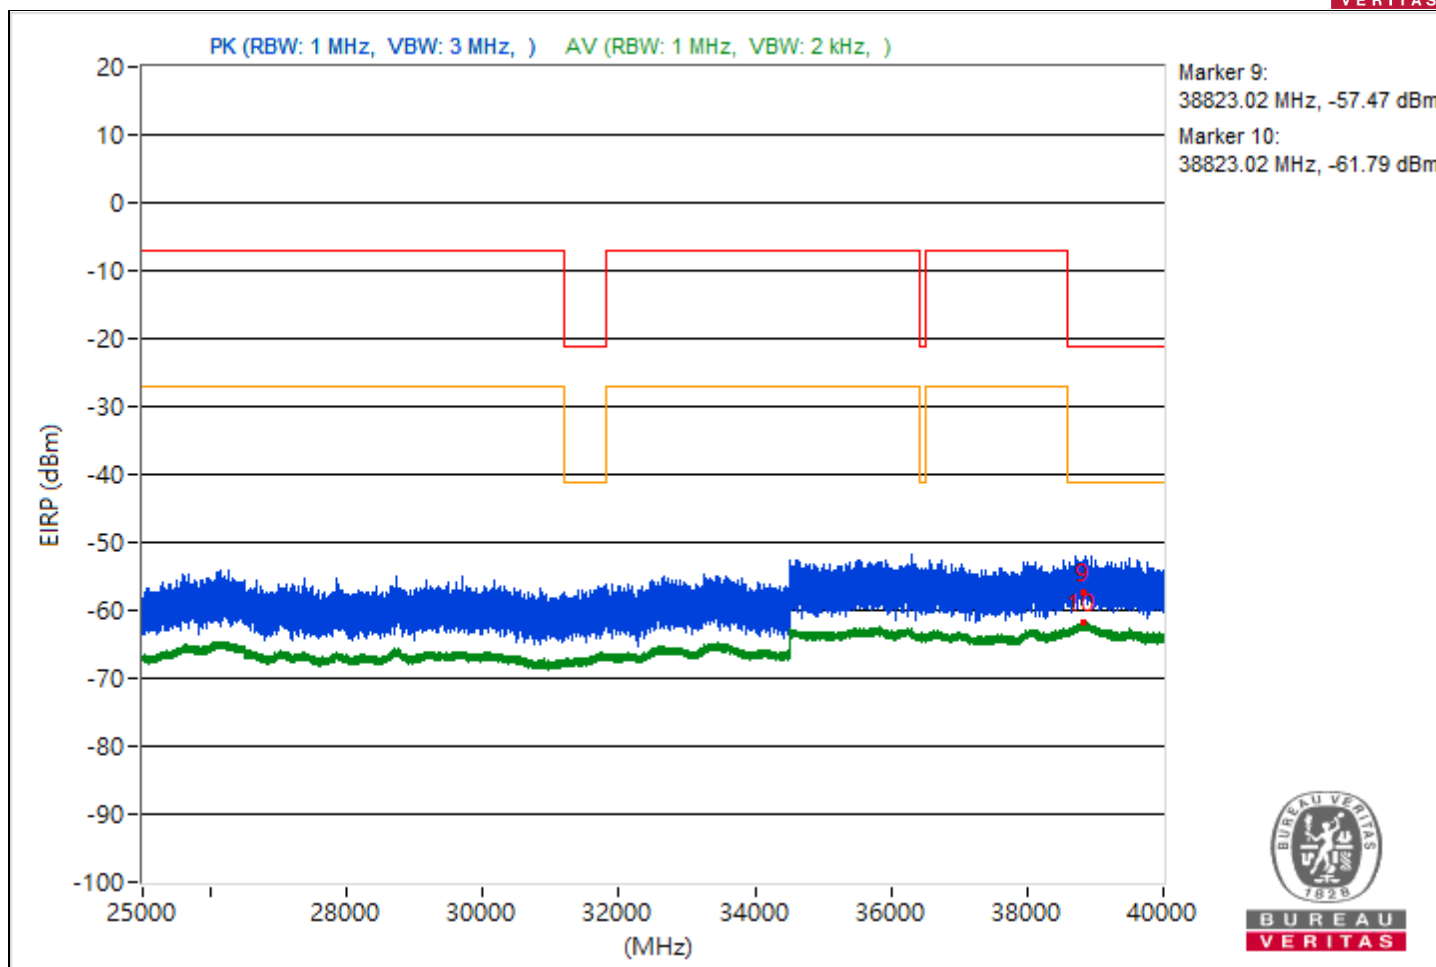


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3849	44.44 PK	74	-29.56	-59.12	-58.42	4.92	-50.82
2	3849	37.53 AV	54	-16.47	-65.13	-66.26	4.92	-57.73
3	14474.4	44.97 PK	74	-29.03	-58.6	-57.87	4.92	-50.29
4	14474.4	36.77 AV	54	-17.23	-66.71	-66.15	4.92	-58.49
5	21033.2	45.89 PK	74	-28.11	-56.62	-58.1	4.92	-49.37
6	21033.2	38.29 AV	54	-15.71	-64.43	-65.44	4.92	-56.97
7	23637.5	47.38 PK	74	-26.62	-57.46	-54.62	4.92	-47.88
8	23637.5	39.62 AV	54	-14.38	-63.07	-64.15	4.92	-55.64
9	38824.89	40.1 PK	74	-33.9	-63.24	-62.94	4.92	-55.16
10	38824.89	33.23 AV	54	-20.77	-69.55	-70.42	4.92	-62.03

Note: Margin value = Emission Level - Limit value

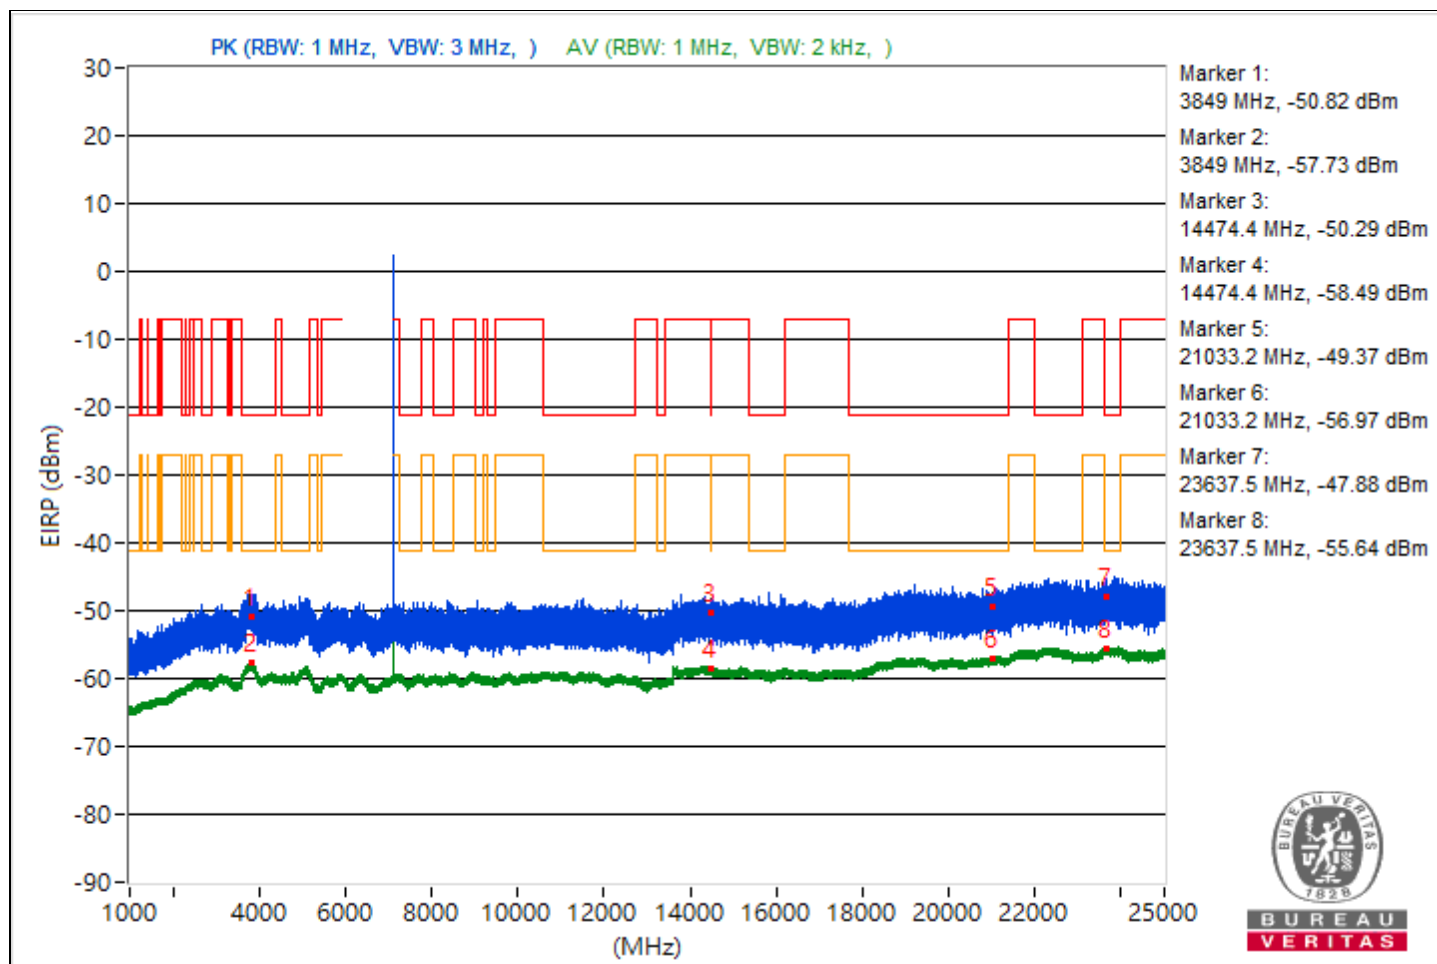


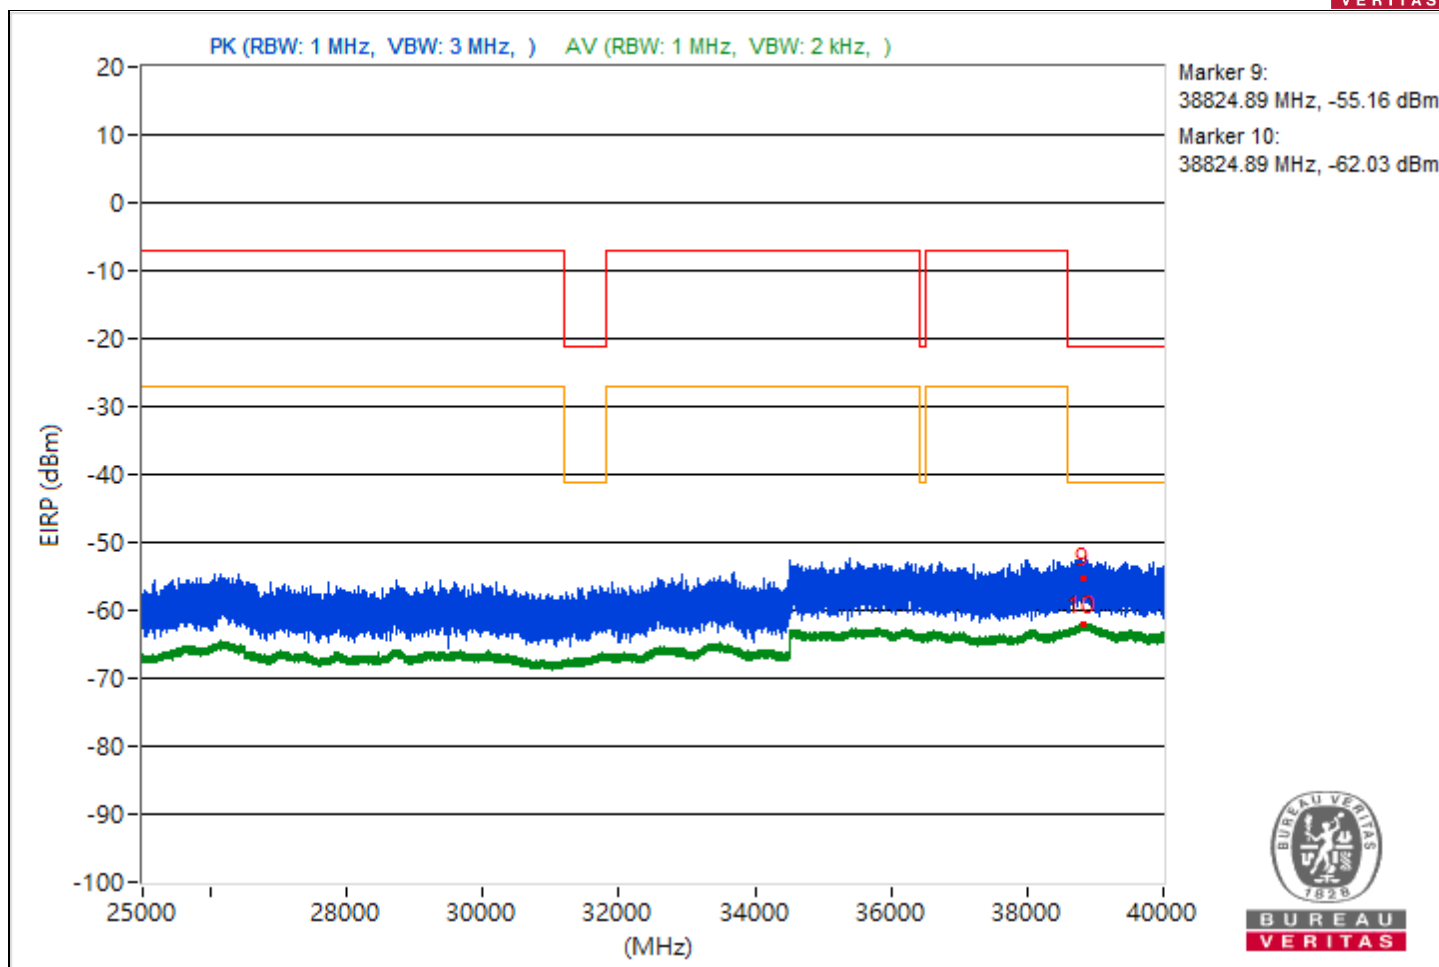


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.19	44.08 PK	74	-29.92	-58.55	-59.75	4.92	-51.18
2	3817.19	37.61 AV	54	-16.39	-65.97	-65.22	4.92	-57.65
3	14480	43.17 PK	74	-30.83	-59.6	-60.49	4.92	-52.09
4	14480	36.9 AV	54	-17.1	-66.13	-66.46	4.92	-58.36
5	21107.8	45.04 PK	74	-28.96	-57.58	-58.8	4.92	-50.22
6	21107.8	38.56 AV	54	-15.44	-64.38	-64.9	4.92	-56.7
7	22317.3	46.84 PK	74	-27.16	-57.36	-55.53	4.92	-48.42
8	22317.3	39.69 AV	54	-14.31	-63.06	-63.98	4.92	-55.57
9	38799.29	39.92 PK	74	-34.08	-62.76	-63.85	4.92	-55.34
10	38799.29	33.43 AV	54	-20.57	-69.44	-70.12	4.92	-61.83

Note: Margin value = Emission Level - Limit value

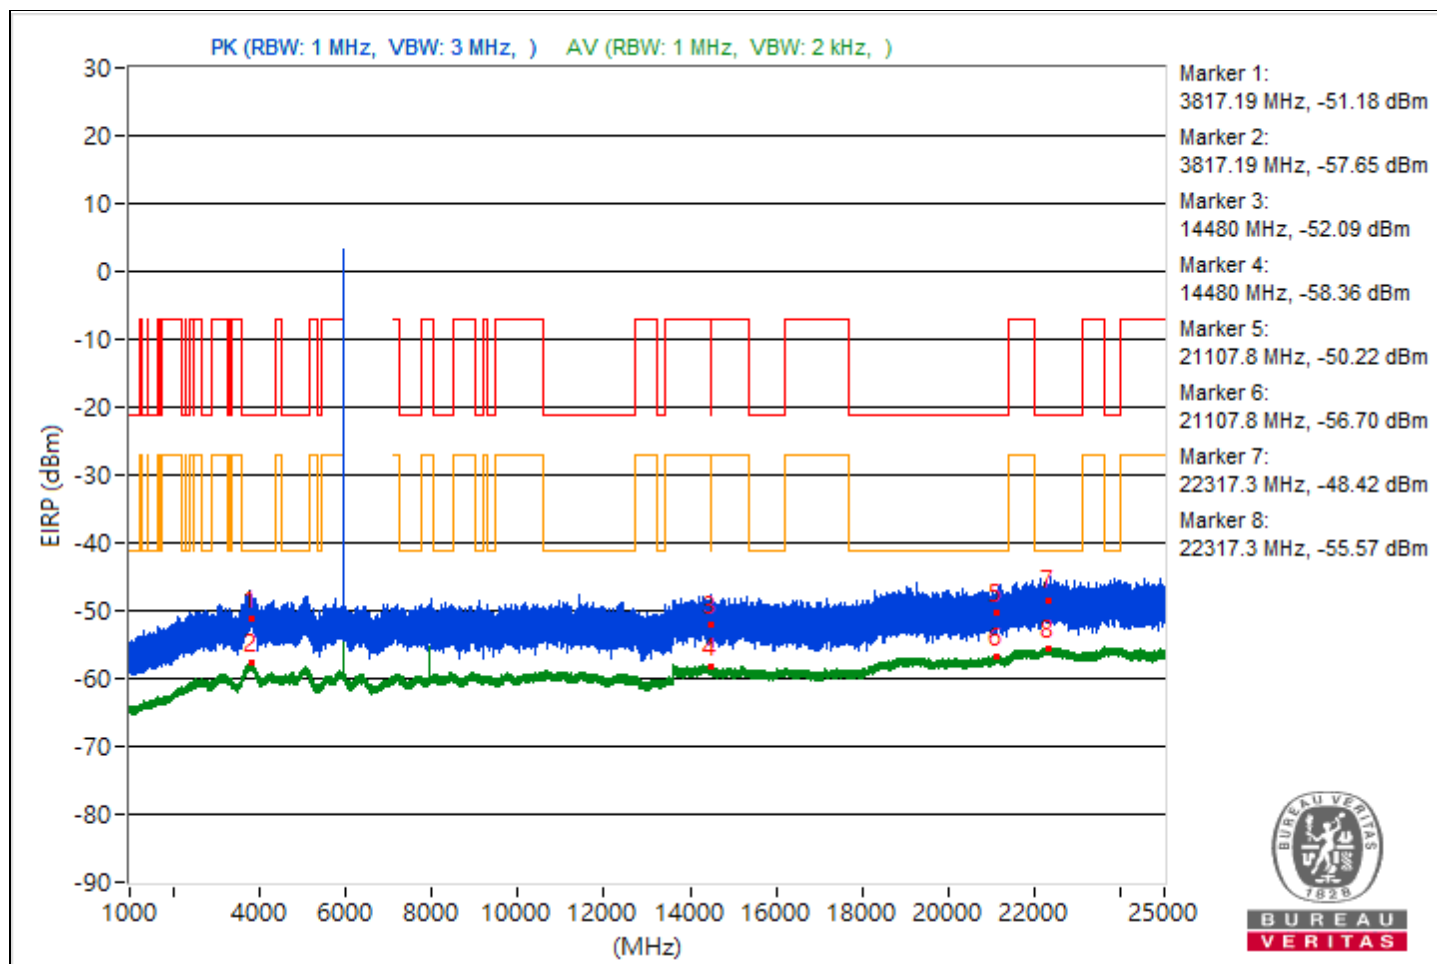


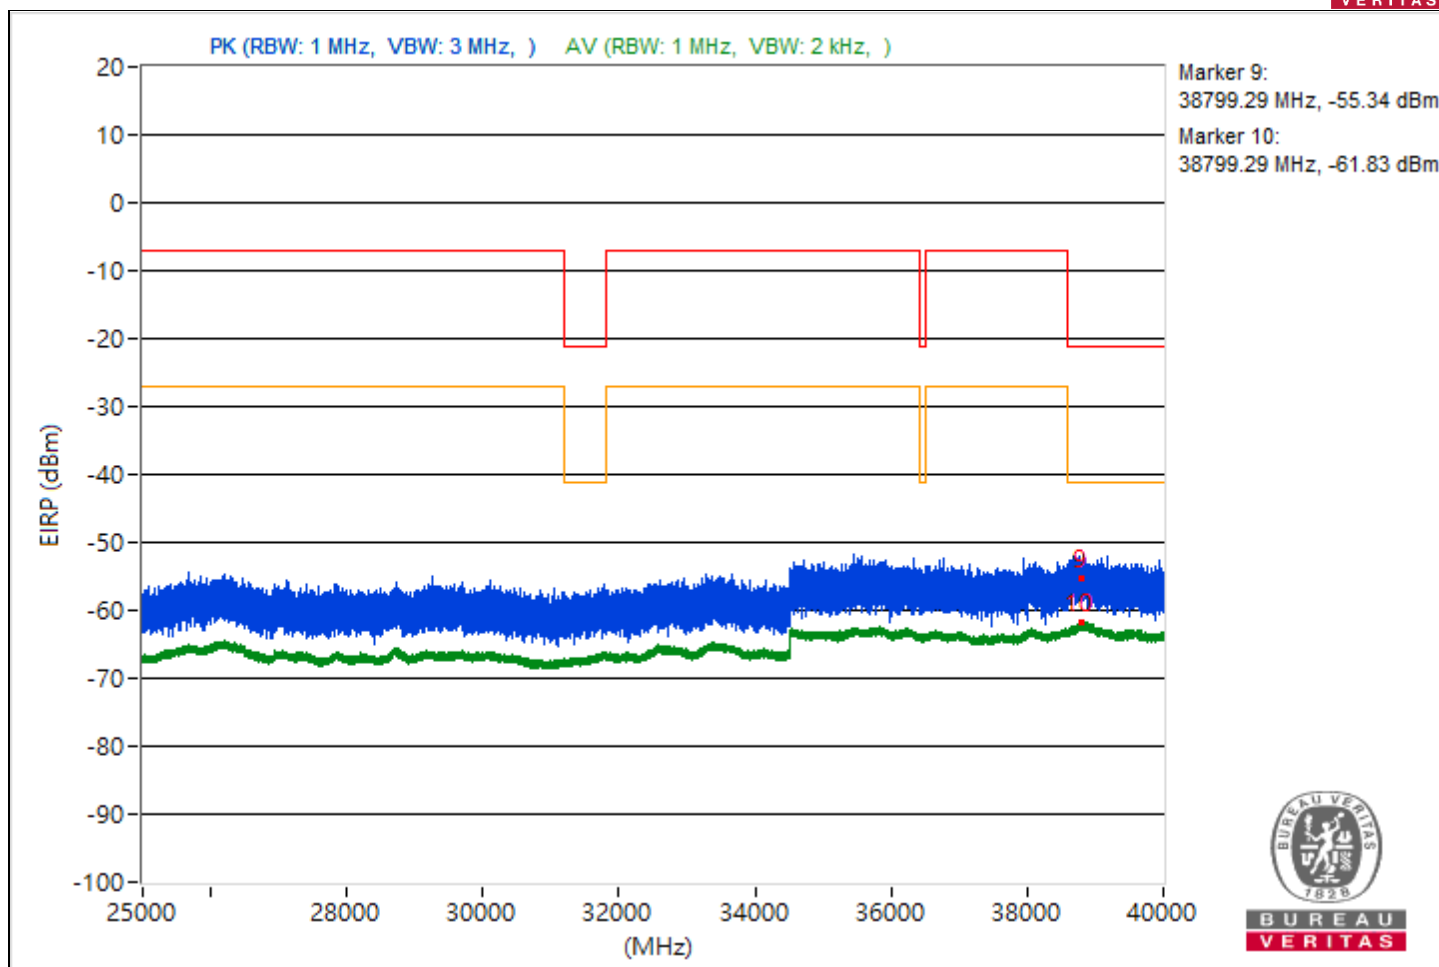


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3799.61	44.24 PK	74	-29.76	-59.85	-58.2	4.92	-51.02
2	3799.61	37.79 AV	54	-16.21	-66.01	-64.87	4.92	-57.47
3	14477.69	42.99 PK	74	-31.01	-59.99	-60.42	4.92	-52.27
4	14477.69	36.79 AV	54	-17.21	-65.91	-66.95	4.92	-58.47
5	21154.6	45.74 PK	74	-28.26	-57.4	-57.51	4.92	-49.52
6	21154.6	38.6 AV	54	-15.4	-64.36	-64.84	4.92	-56.66
7	23867	47.4 PK	74	-26.6	-55.87	-55.72	4.92	-47.86
8	23867	39.88 AV	54	-14.12	-63.05	-63.59	4.92	-55.38
9	38804.09	39.98 PK	74	-34.02	-63.85	-62.66	4.92	-55.28
10	38804.09	33.42 AV	54	-20.58	-70.25	-69.35	4.92	-61.84

Note: Margin value = Emission Level - Limit value

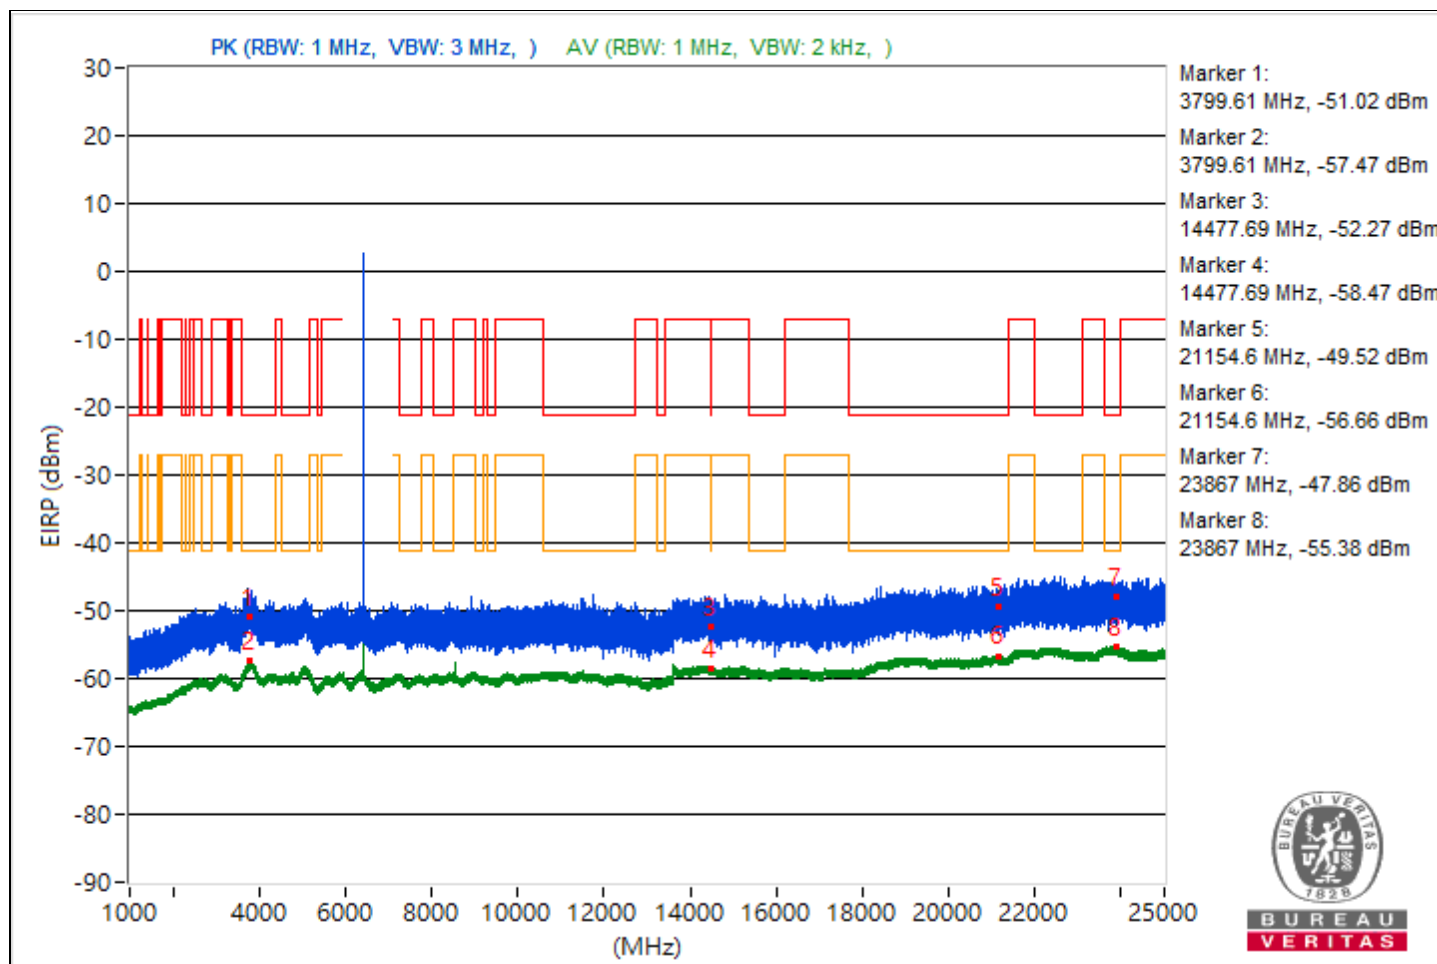


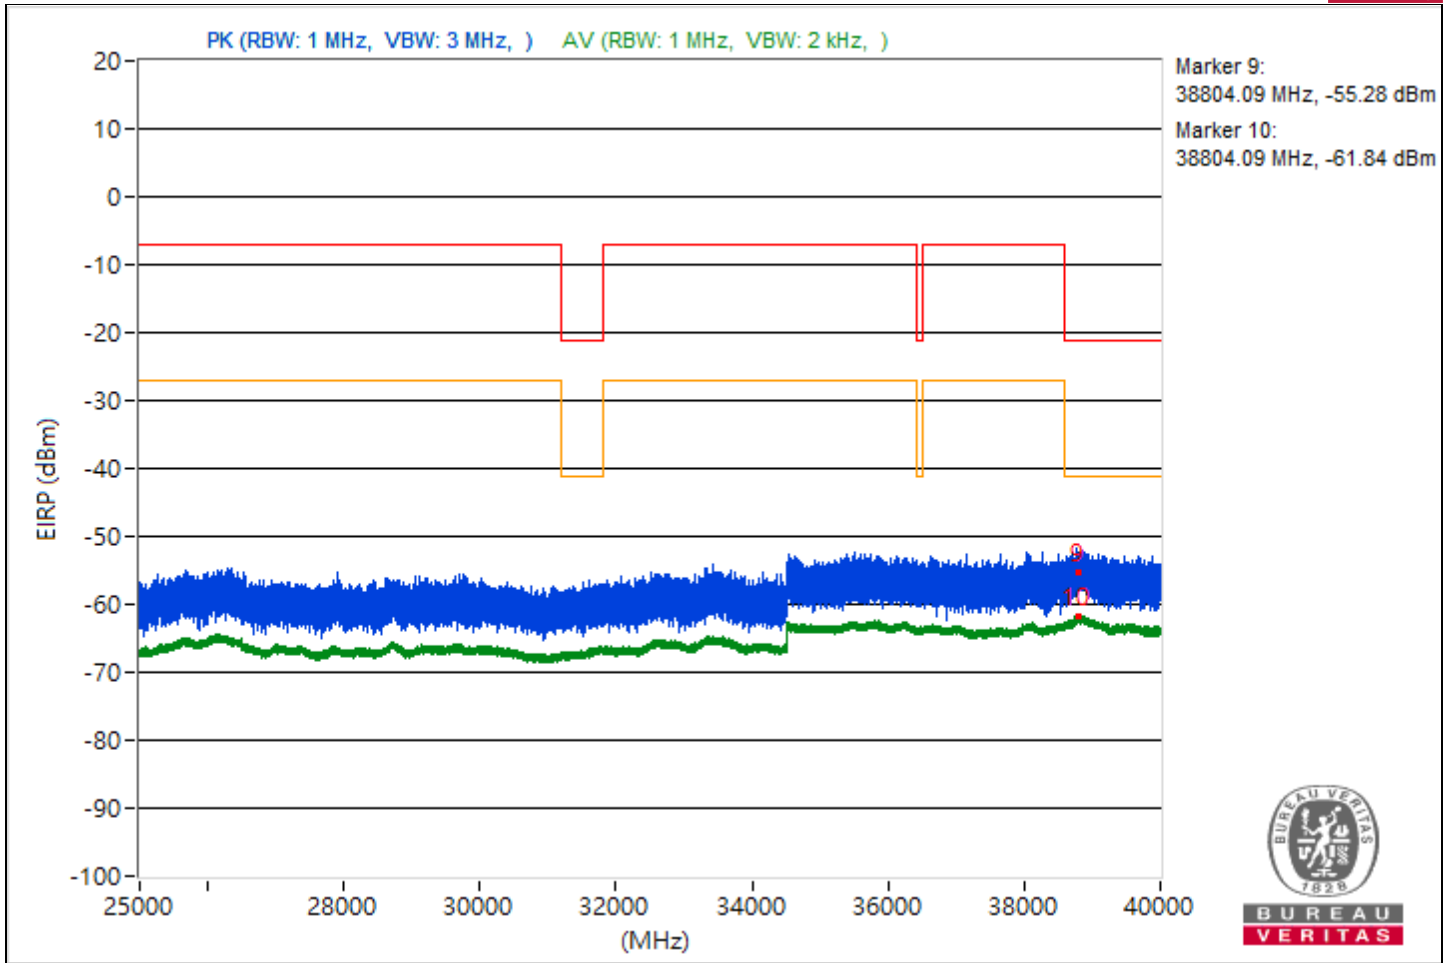


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.52	45.19 PK	74	-28.81	-58.65	-57.43	4.92	-50.07
2	3812.52	37.84 AV	54	-16.16	-65.58	-65.12	4.92	-57.42
3	14495.2	42.52 PK	74	-31.48	-60.7	-60.65	4.92	-52.74
4	14495.2	36.86 AV	54	-17.14	-66.12	-66.55	4.92	-58.4
5	21169.9	46.36 PK	74	-27.64	-57.2	-56.48	4.92	-48.9
6	21169.9	38.59 AV	54	-15.41	-64.98	-64.25	4.92	-56.67
7	22339.9	46.18 PK	74	-27.82	-56.12	-58.13	4.92	-49.08
8	22339.9	39.9 AV	54	-14.1	-63.55	-63.05	4.92	-55.36
9	38818.84	38.76 PK	74	-35.24	-65.88	-63.34	4.92	-56.5
10	38818.84	33.48 AV	54	-20.52	-69.47	-69.97	4.92	-61.78

Note: Margin value = Emission Level - Limit value

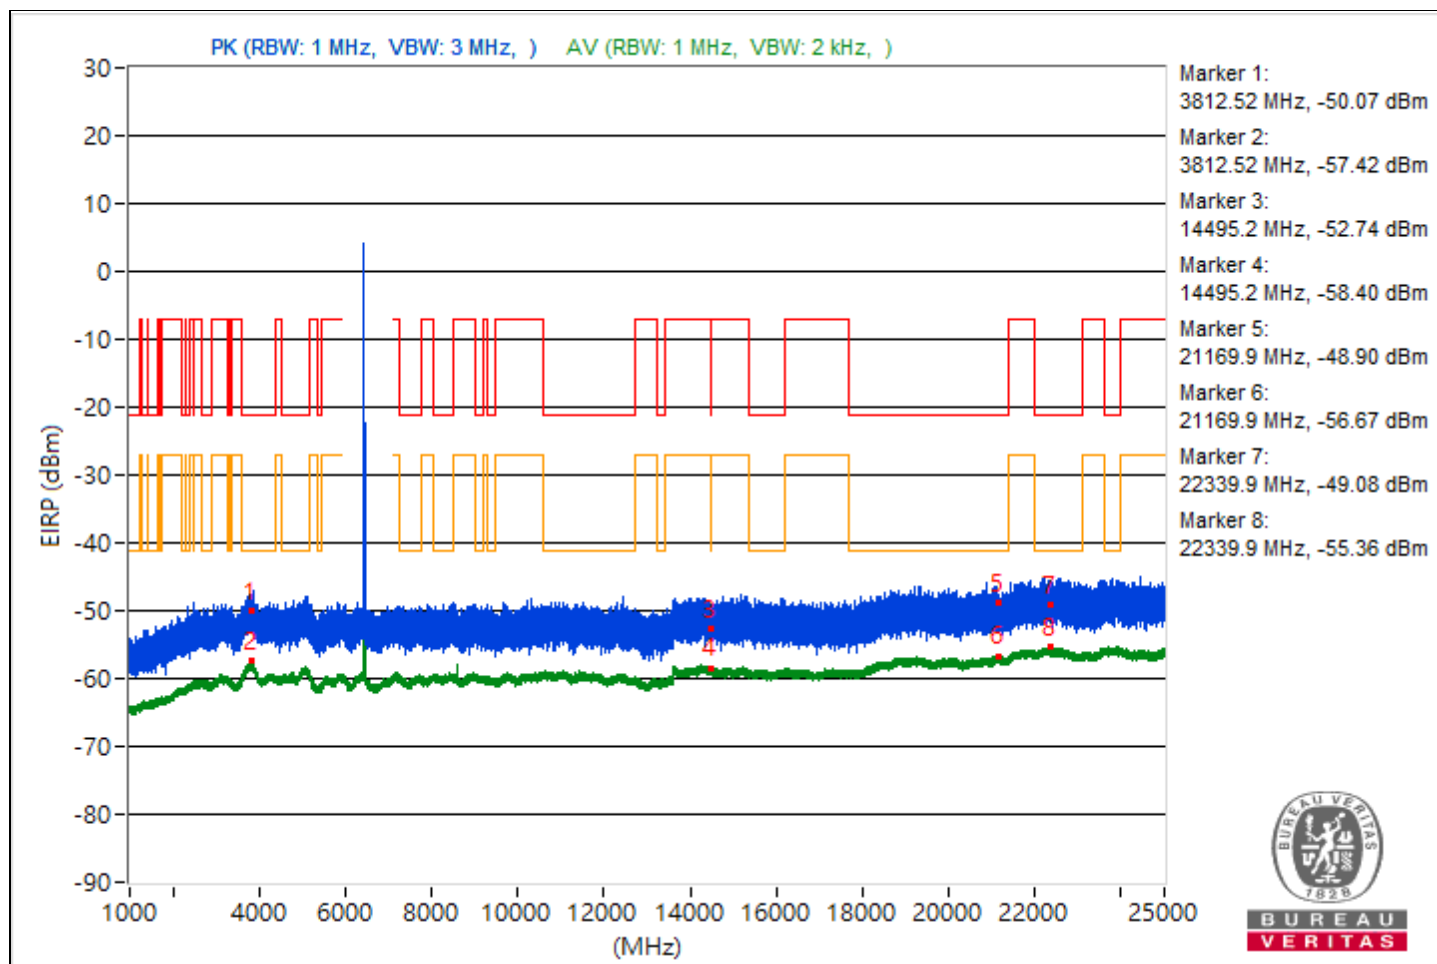


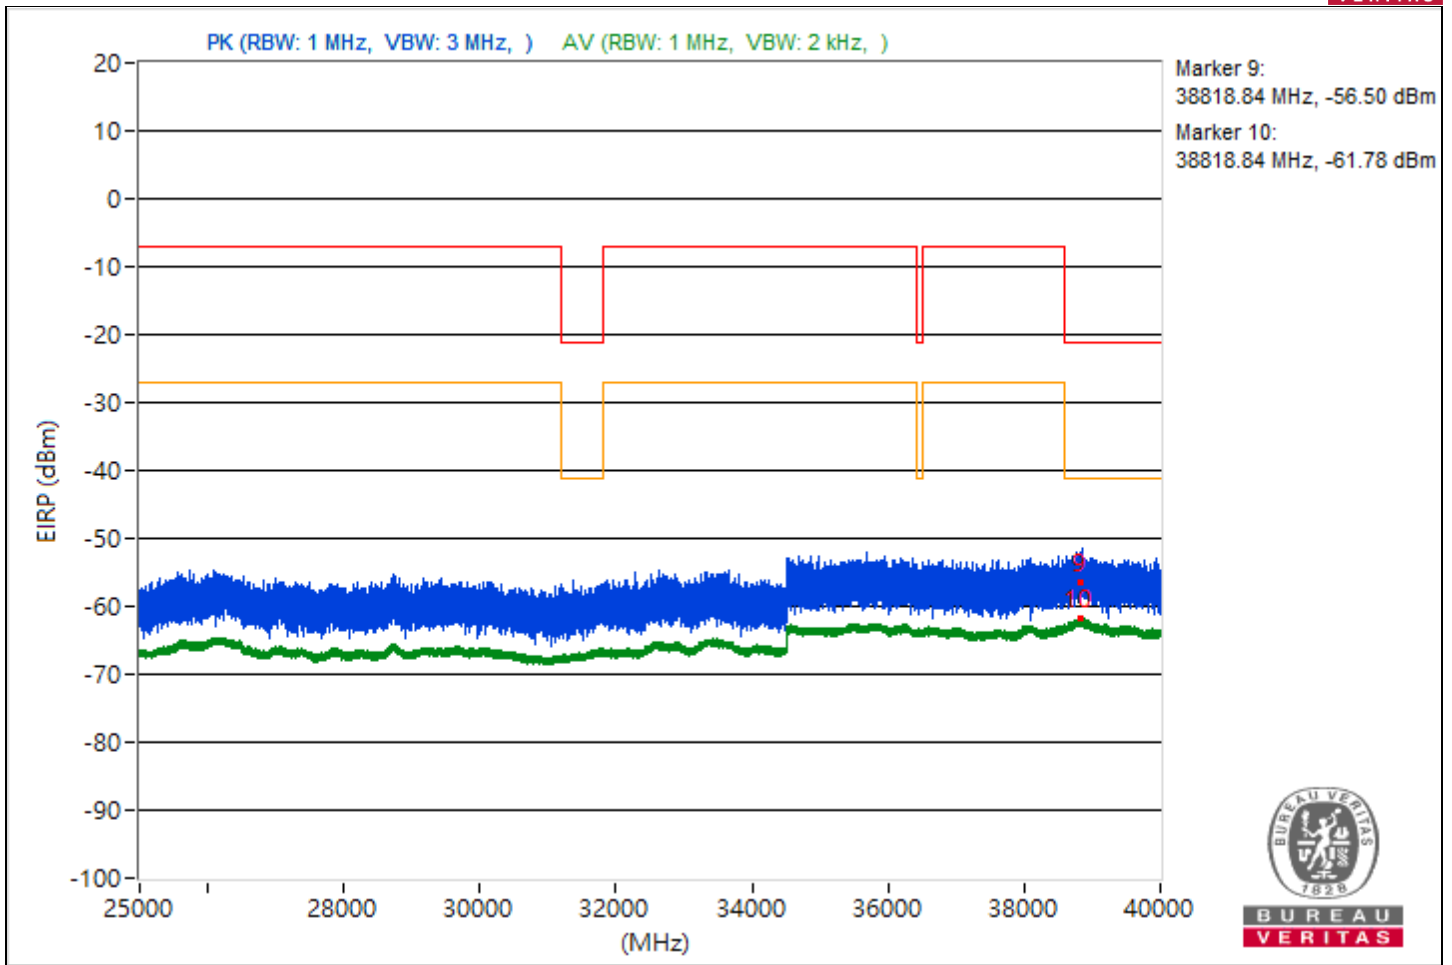


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.23	46.44 PK	74	-27.56	-57.26	-56.29	4.92	-48.82
2	3814.23	37.63 AV	54	-16.37	-65.31	-65.83	4.92	-57.63
3	14486.93	43.47 PK	74	-30.53	-59.34	-60.15	4.92	-51.79
4	14486.93	36.72 AV	54	-17.28	-66.77	-66.2	4.92	-58.54
5	21385.6	47.07 PK	74	-26.93	-56.04	-56.21	4.92	-48.19
6	21385.6	38.42 AV	54	-15.58	-64.27	-65.34	4.92	-56.84
7	22255.7	47.12 PK	74	-26.88	-55.22	-57.12	4.92	-48.14
8	22255.7	39.98 AV	54	-14.02	-63.5	-62.94	4.92	-55.28
9	38804.27	40.6 PK	74	-33.4	-62	-63.28	4.92	-54.66
10	38804.27	33.41 AV	54	-20.59	-70.12	-69.47	4.92	-61.85

Note: Margin value = Emission Level - Limit value

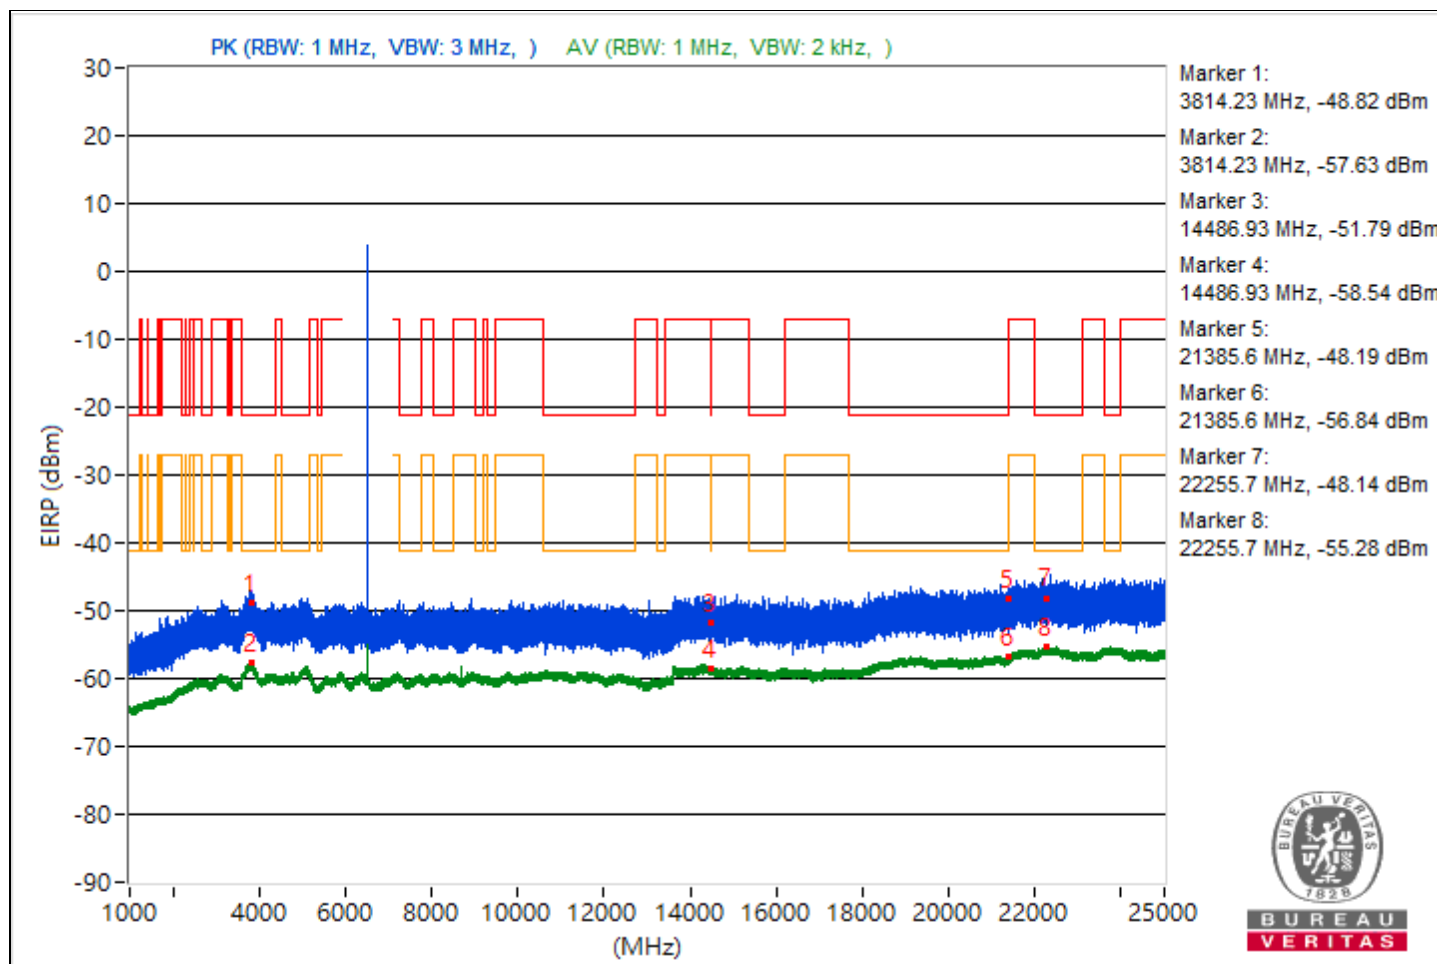


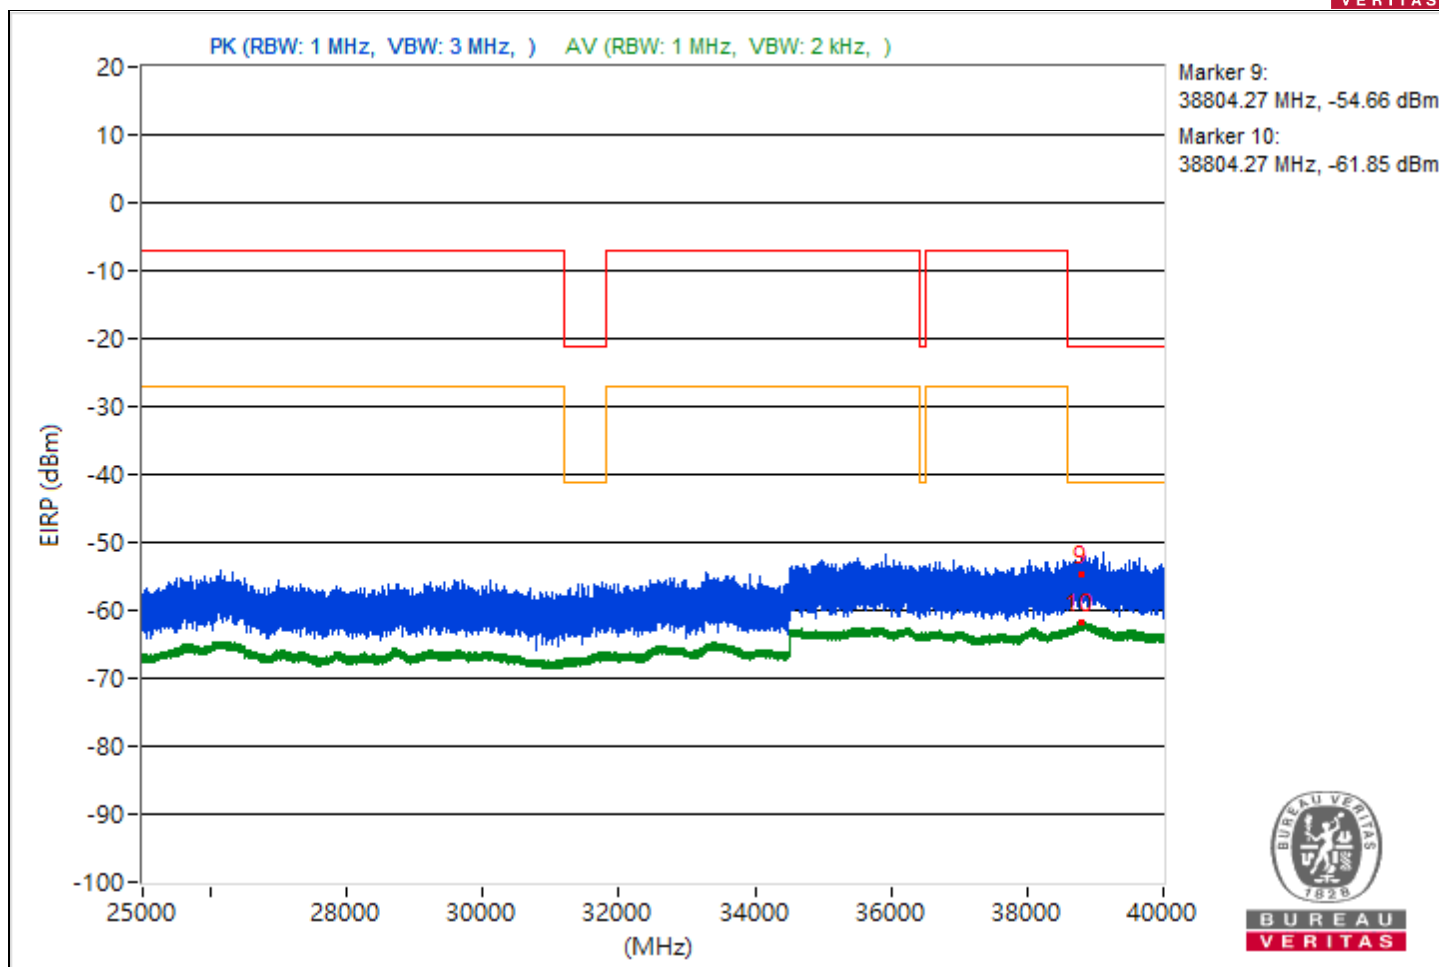


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.58	43.31 PK	74	-30.69	-59.72	-60.04	4.92	-51.95
2	3789.58	37.51 AV	54	-16.49	-65.18	-66.25	4.92	-57.75
3	14479.47	40.45 PK	74	-33.55	-63.47	-62.12	4.92	-54.81
4	14479.47	36.91 AV	54	-17.09	-66.63	-65.95	4.92	-58.35
5	21180.3	43.81 PK	74	-30.19	-59.22	-59.56	4.92	-51.45
6	21180.3	38.67 AV	54	-15.33	-64.18	-64.89	4.92	-56.59
7	22215.2	46.01 PK	74	-27.99	-56.18	-58.49	4.92	-49.25
8	22215.2	39.98 AV	54	-14.02	-63.75	-62.72	4.92	-55.28
9	38802.58	39.05 PK	74	-34.95	-64.53	-63.78	4.92	-56.21
10	38802.58	33.38 AV	54	-20.62	-70.23	-69.42	4.92	-61.88

Note: Margin value = Emission Level - Limit value

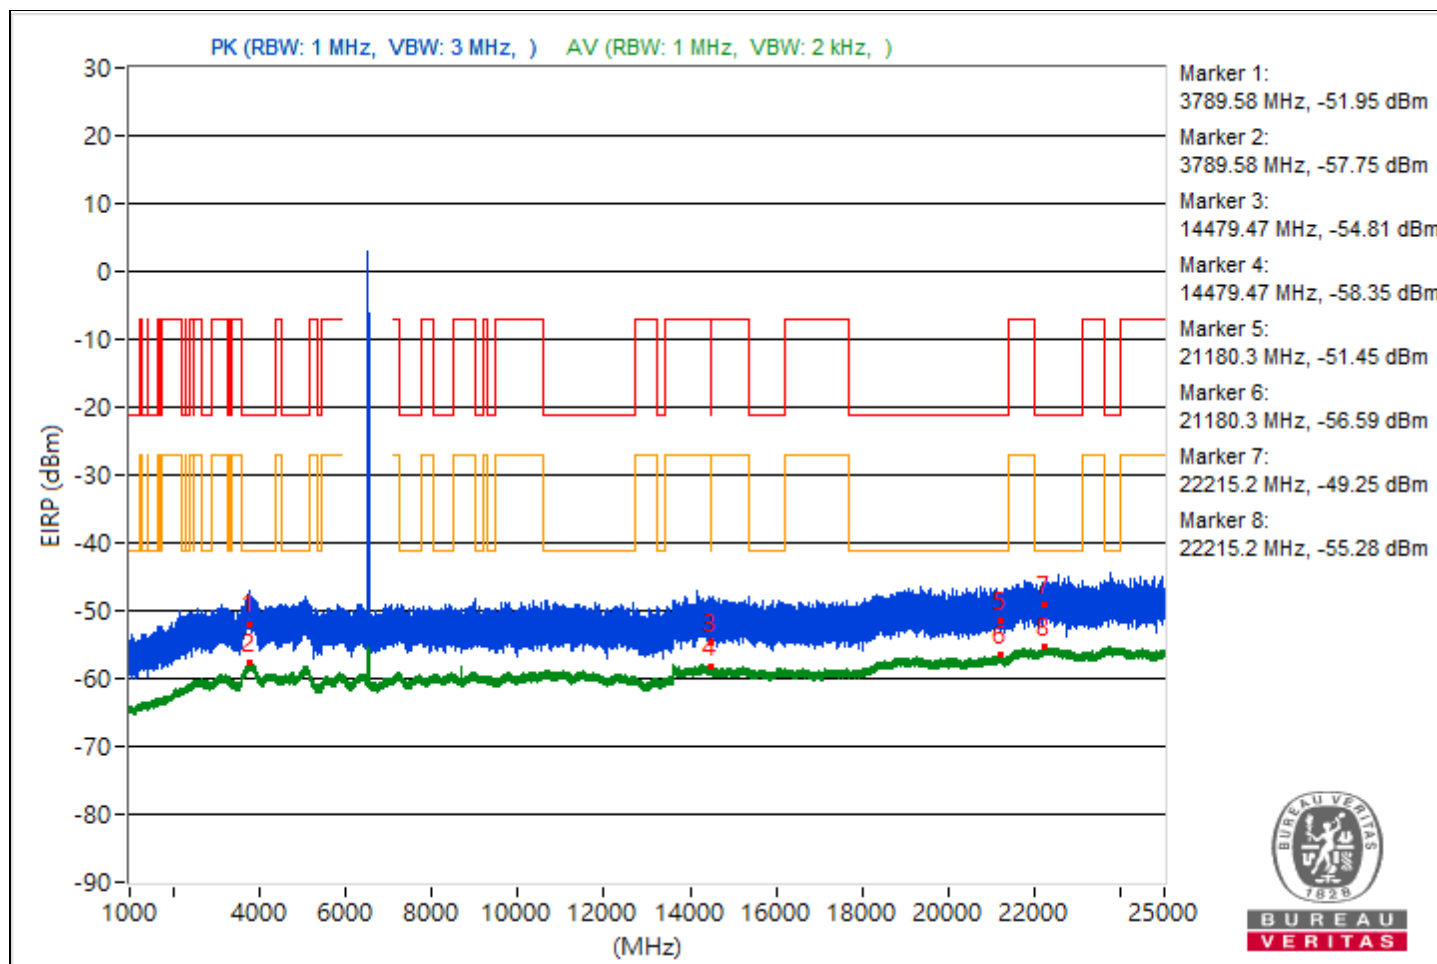


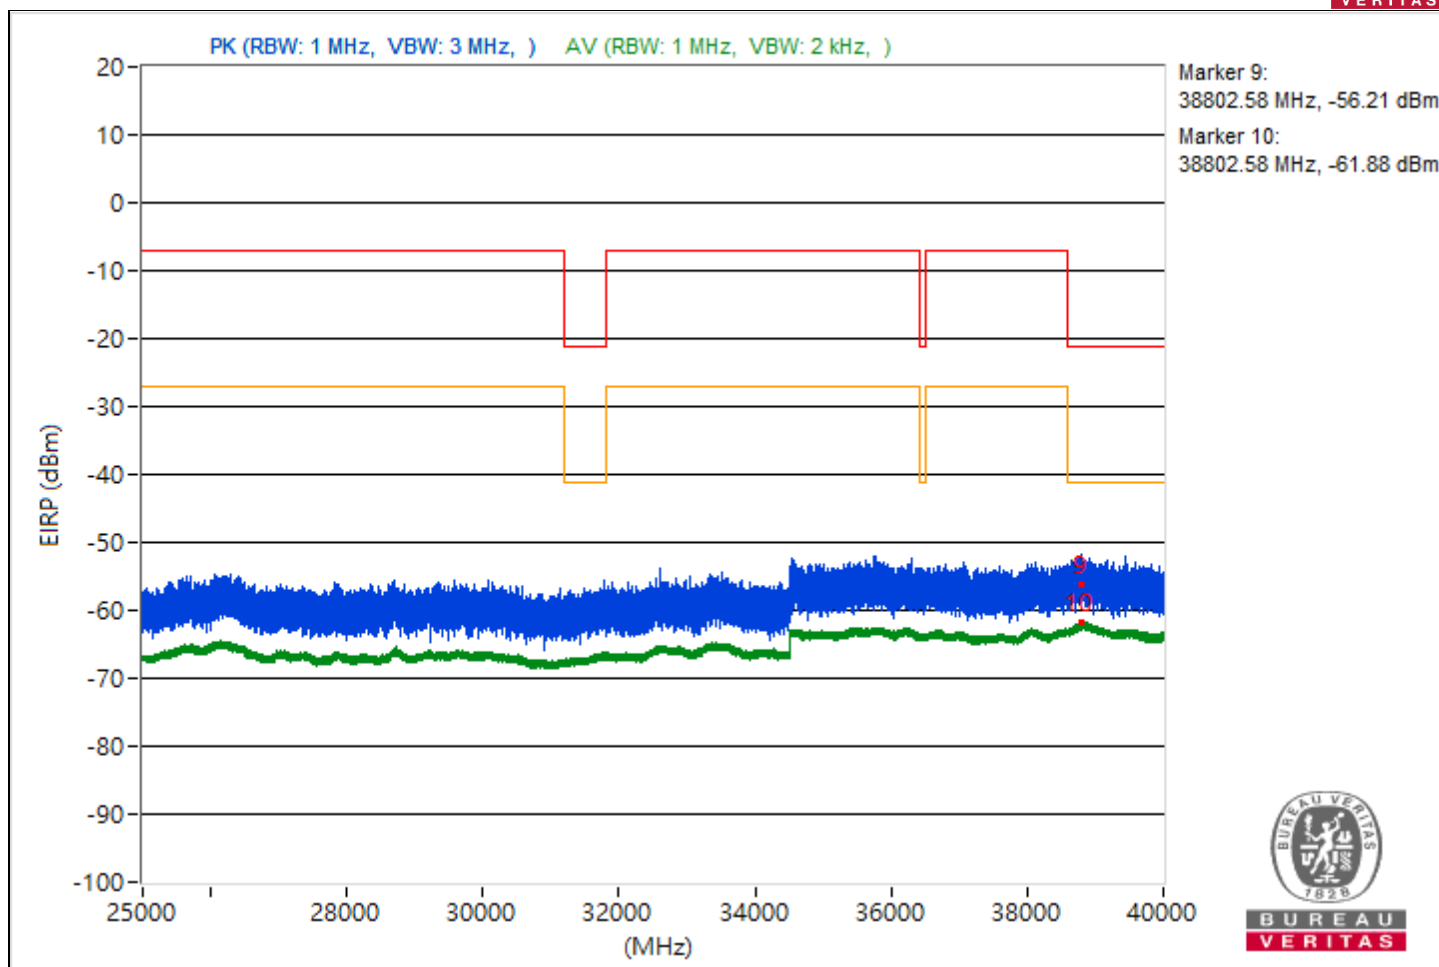


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.51	46.46 PK	74	-27.54	-58.12	-55.68	4.92	-48.8
2	3804.51	37.5 AV	54	-16.5	-66.05	-65.36	4.92	-57.76
3	15641.78	43.16 PK	74	-30.84	-60.25	-59.83	4.92	-52.1
4	15641.78	36.66 AV	54	-17.34	-66.25	-66.83	4.92	-58.6
5	21131.7	44.72 PK	74	-29.28	-57.96	-59.06	4.92	-50.54
6	21131.7	38.88 AV	54	-15.12	-63.93	-64.73	4.92	-56.38
7	23614.7	47.96 PK	74	-26.04	-56.68	-54.14	4.92	-47.3
8	23614.7	39.92 AV	54	-14.08	-62.91	-63.66	4.92	-55.34
9	38858.84	37.17 PK	74	-36.83	-66.47	-65.61	4.92	-58.09
10	38858.84	33.33 AV	54	-20.67	-69.46	-70.29	4.92	-61.93

Note: Margin value = Emission Level - Limit value

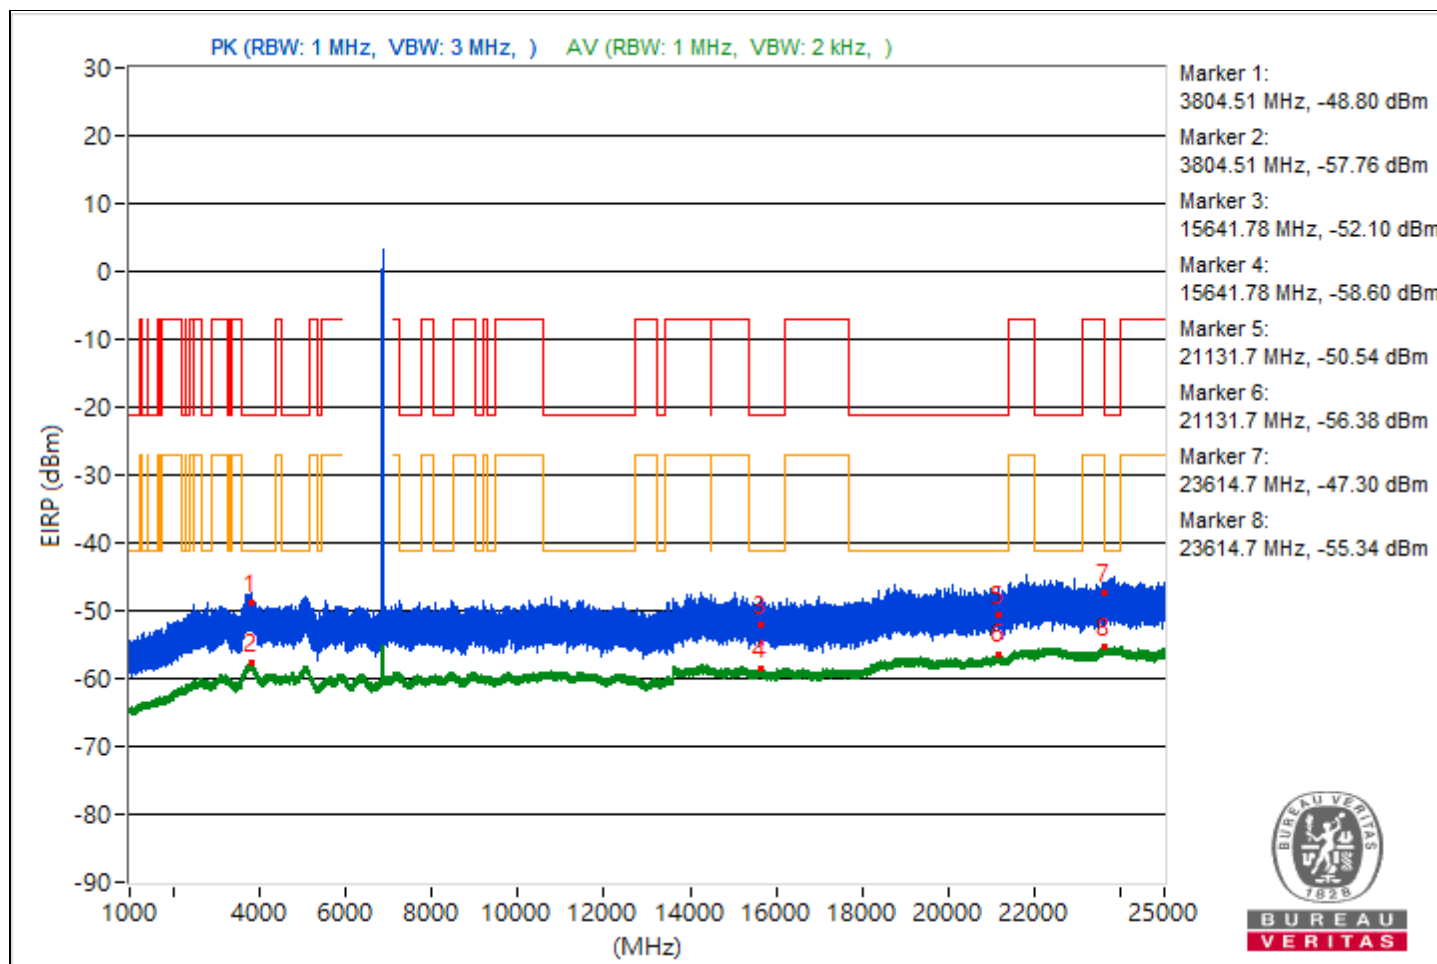


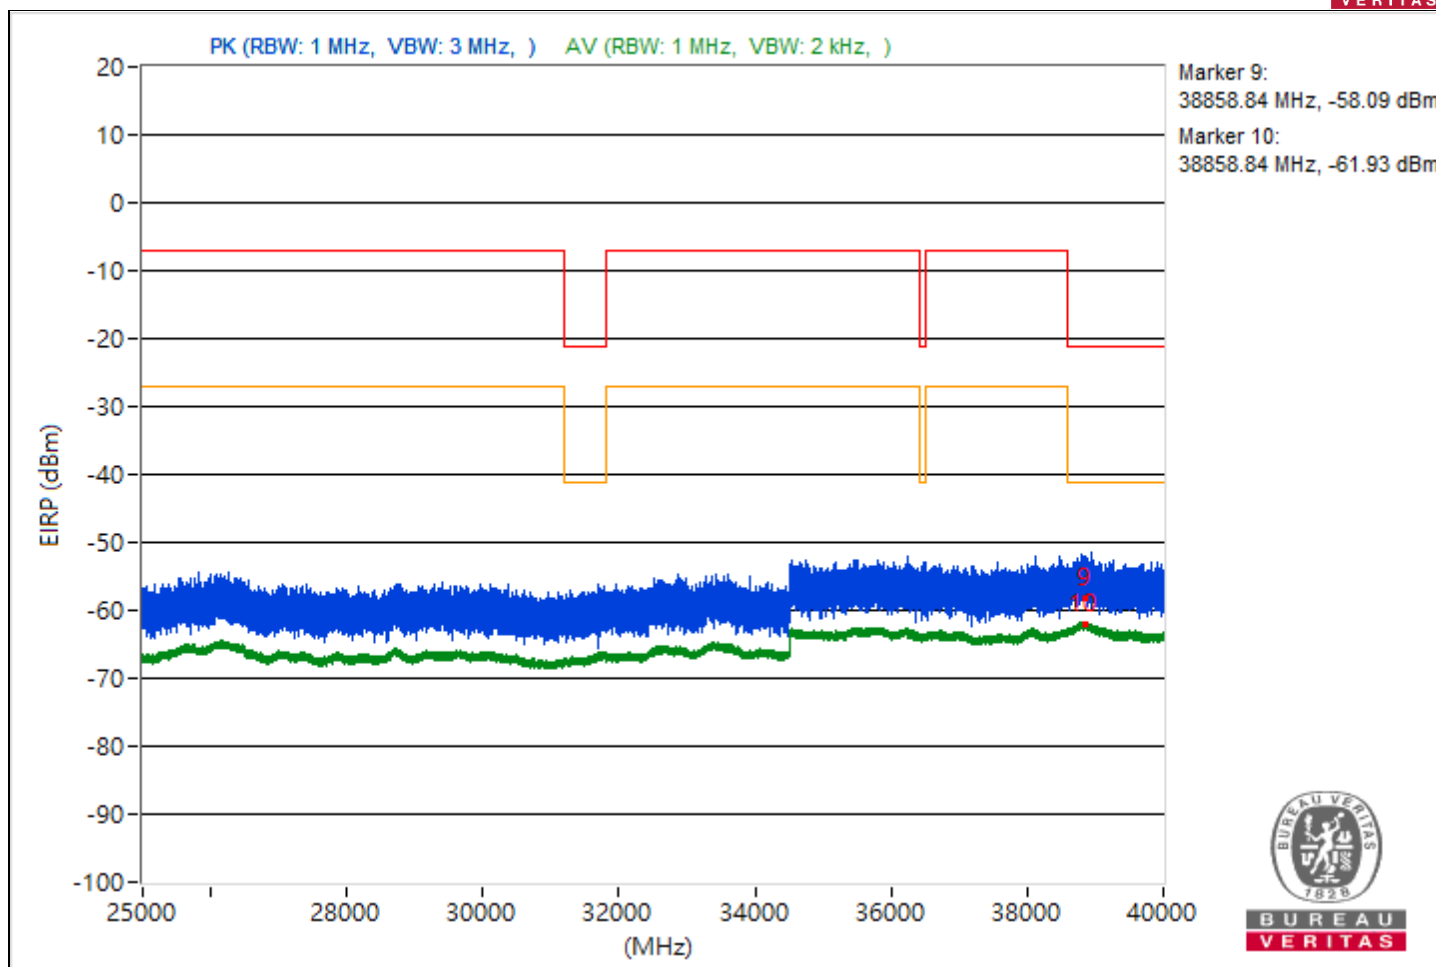


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3837.57	44.67 PK	74	-29.33	-59.23	-57.91	4.92	-50.59
2	3837.57	37.55 AV	54	-16.45	-65.13	-66.23	4.92	-57.71
3	14486.58	44.05 PK	74	-29.95	-59.65	-58.69	4.92	-51.21
4	14486.58	36.62 AV	54	-17.38	-66.9	-66.26	4.92	-58.64
5	20884.5	44.5 PK	74	-29.5	-58.81	-58.57	4.92	-50.76
6	20884.5	38.61 AV	54	-15.39	-65.09	-64.12	4.92	-56.65
7	22271.2	46.5 PK	74	-27.5	-55.41	-58.53	4.92	-48.76
8	22271.2	39.82 AV	54	-14.18	-63.76	-63.01	4.92	-55.44
9	38821.69	40.91 PK	74	-33.09	-64.65	-60.76	4.92	-54.35
10	38821.69	33.56 AV	54	-20.44	-69.28	-70.02	4.92	-61.7

Note: Margin value = Emission Level - Limit value

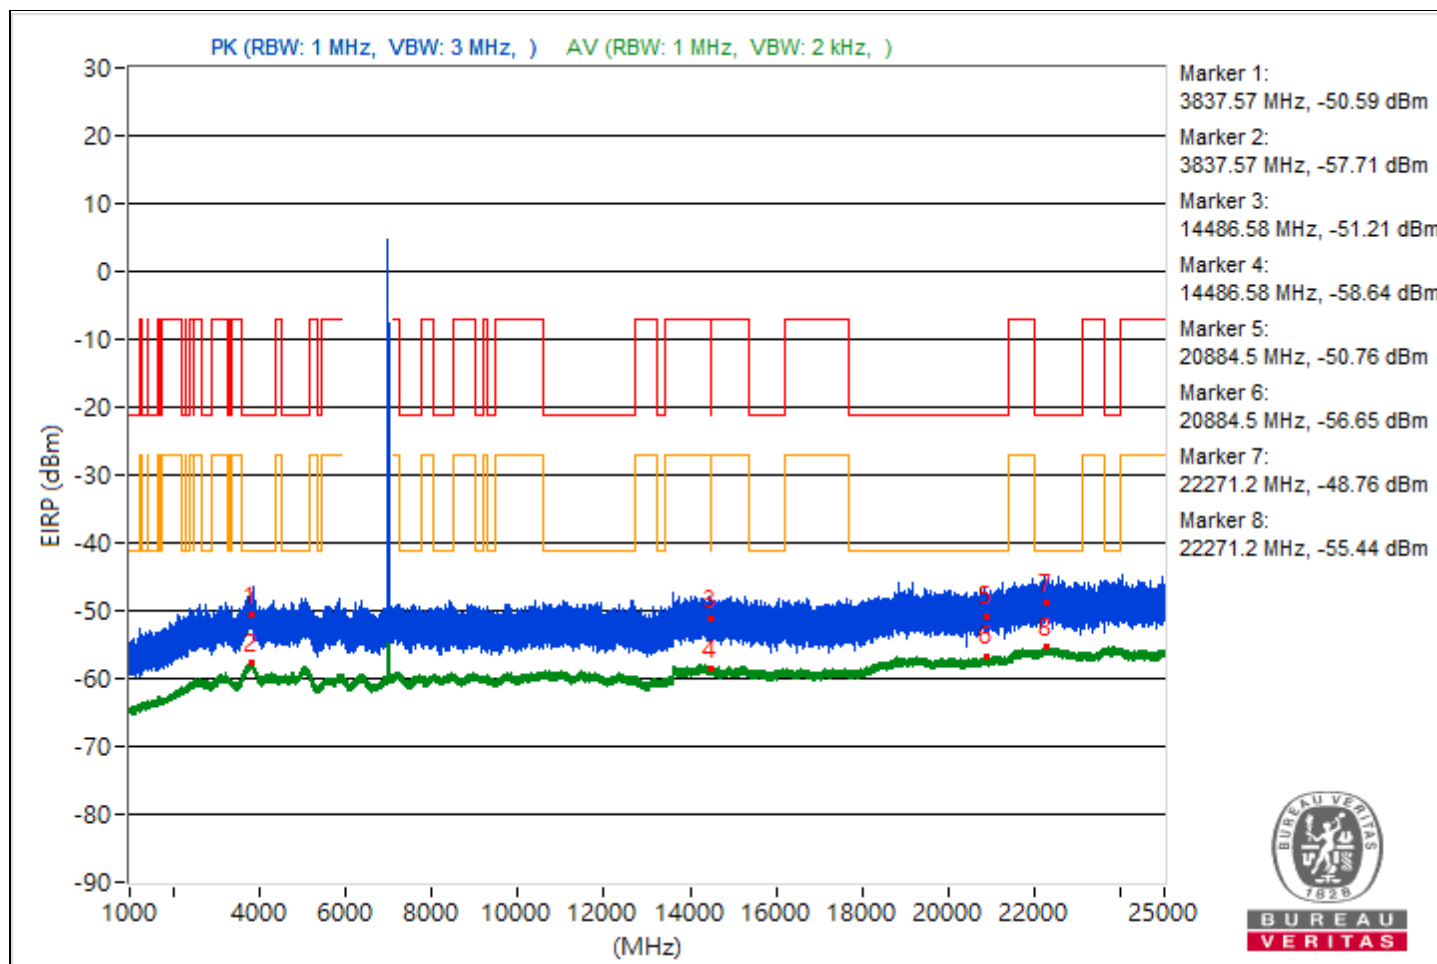


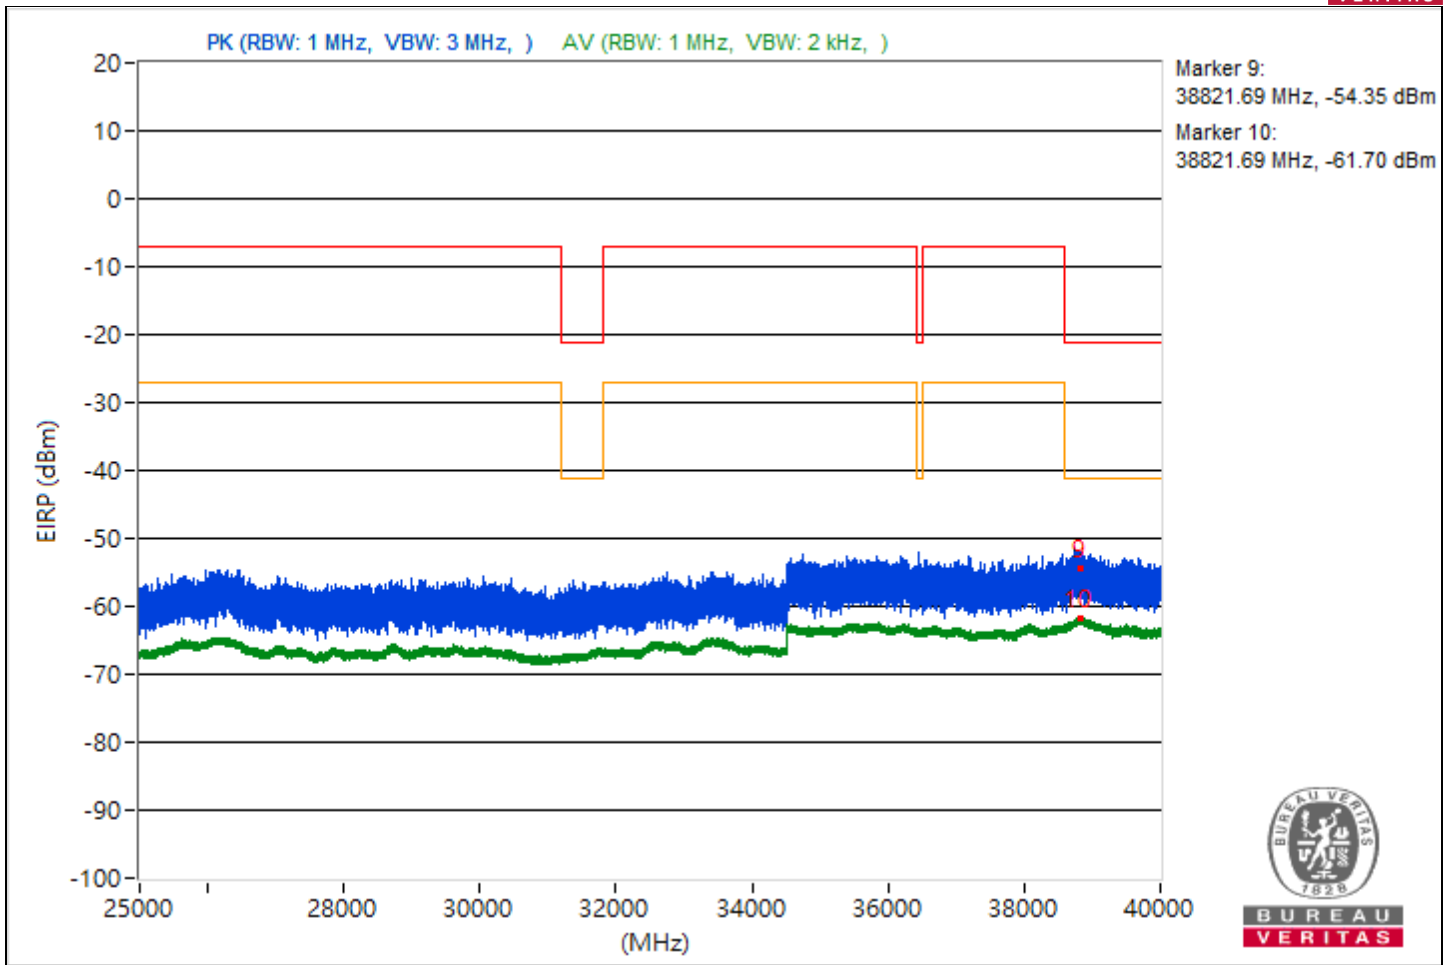


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.71	43.7 PK	74	-30.3	-58.56	-60.67	4.92	-51.56
2	3808.71	37.5 AV	54	-16.5	-66.08	-65.33	4.92	-57.76
3	14470.31	43.68 PK	74	-30.32	-59.6	-59.43	4.92	-51.58
4	14470.31	36.78 AV	54	-17.22	-66.82	-66.03	4.92	-58.48
5	21109.6	45.68 PK	74	-28.32	-57.82	-57.23	4.92	-49.58
6	21109.6	38.49 AV	54	-15.51	-64.06	-65.44	4.92	-56.77
7	23779.1	46.6 PK	74	-27.4	-54.97	-59.2	4.92	-48.66
8	23779.1	39.68 AV	54	-14.32	-64.22	-62.9	4.92	-55.58
9	38795.11	39.42 PK	74	-34.58	-64.65	-63.04	4.92	-55.84
10	38795.11	33.55 AV	54	-20.45	-69.96	-69.33	4.92	-61.71

Note: Margin value = Emission Level - Limit value

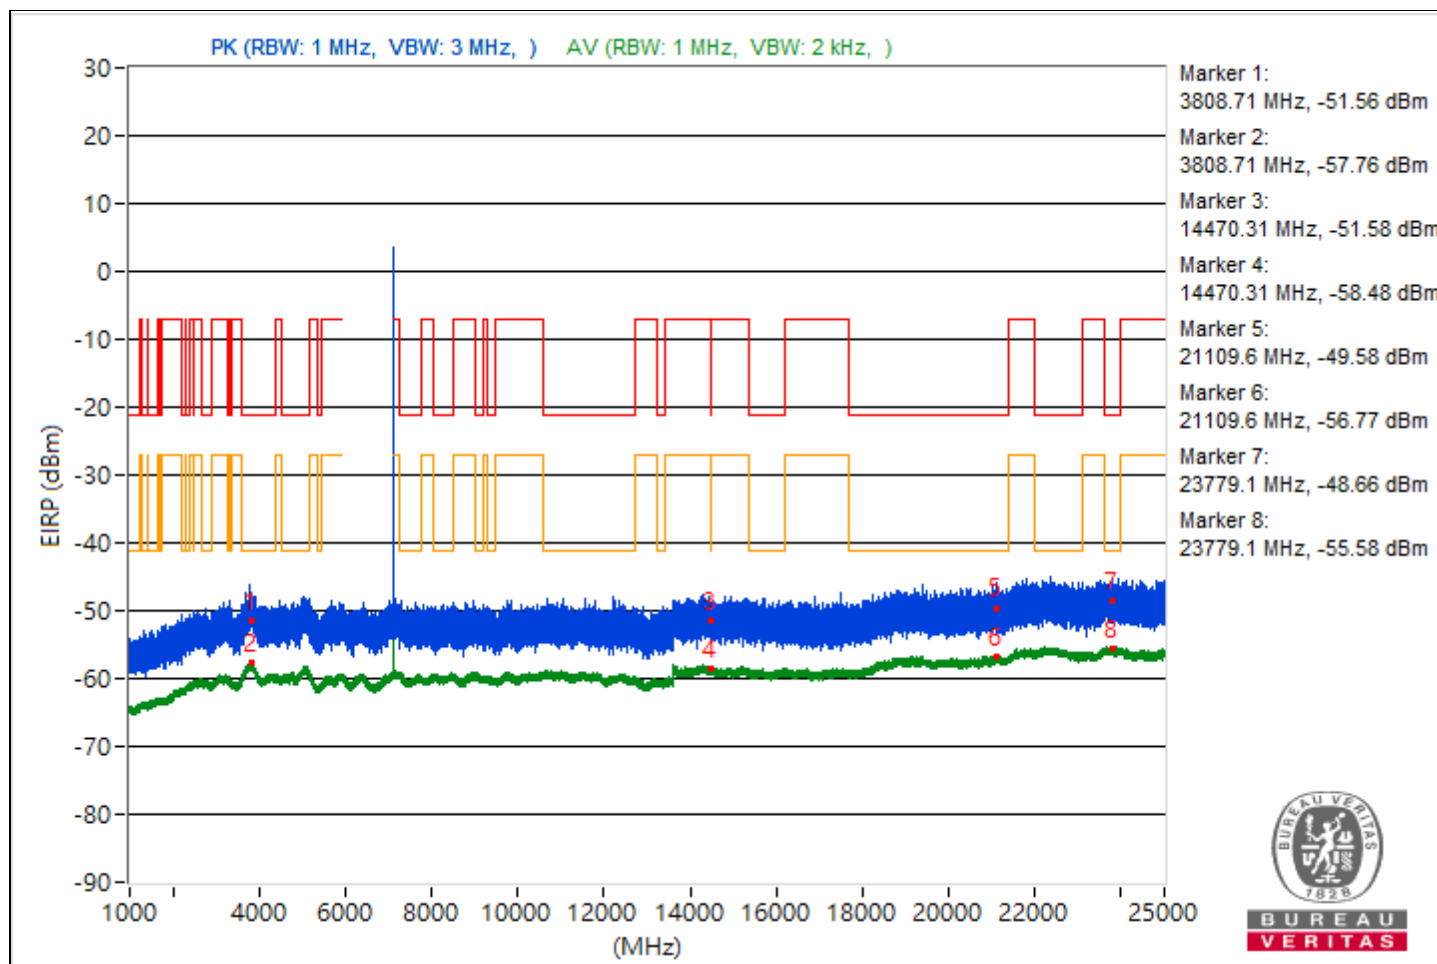


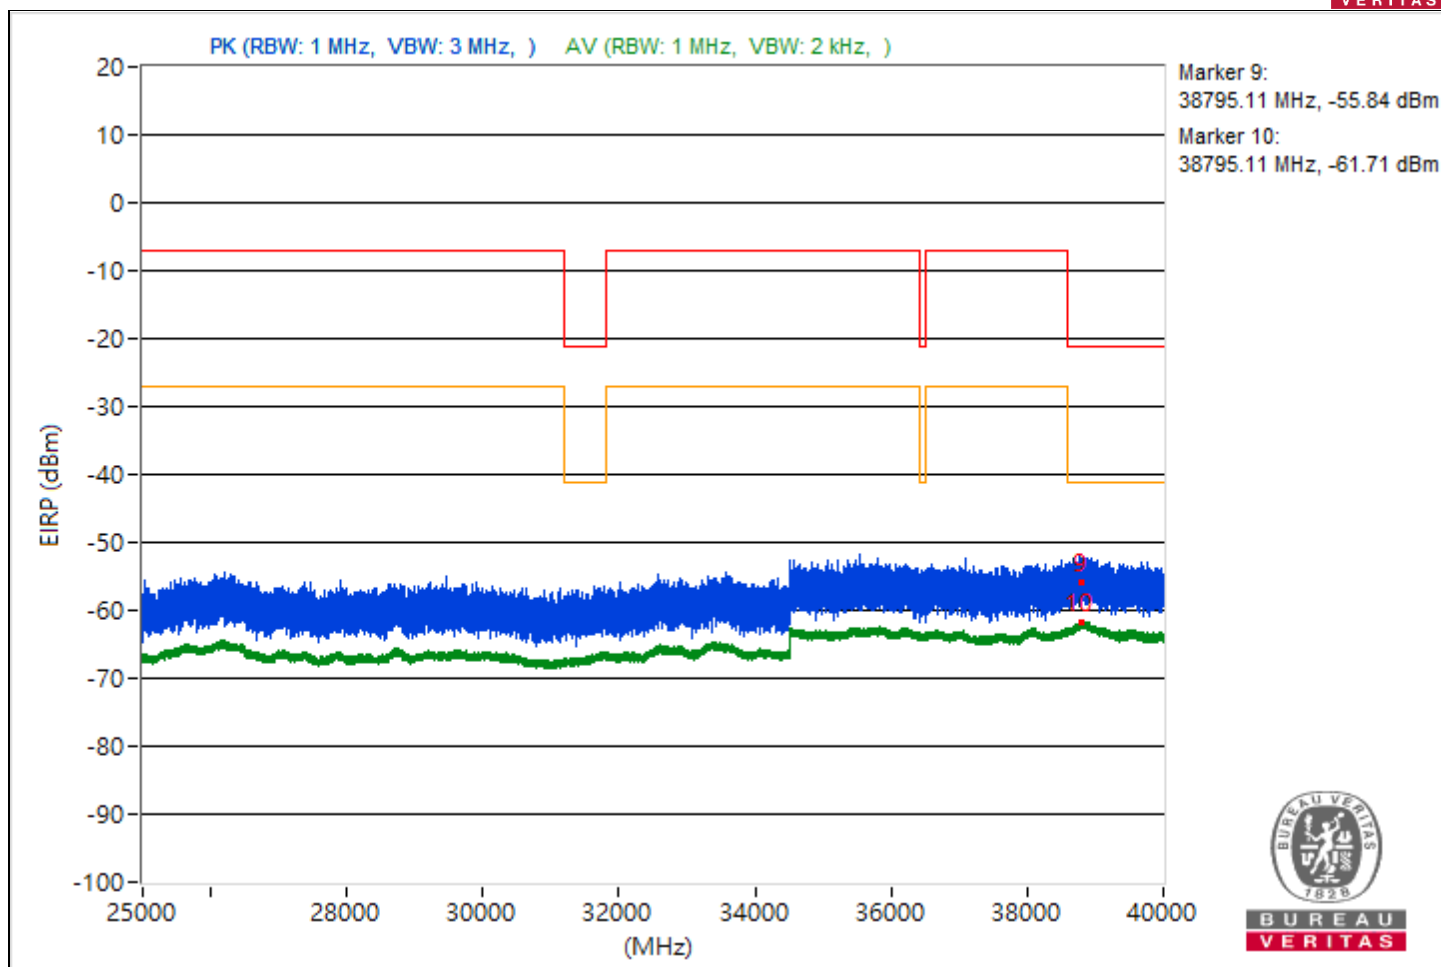


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.73	45.82 PK	74	-28.18	-58.84	-56.28	4.92	-49.44
2	3789.73	37.54 AV	54	-16.46	-65.85	-65.45	4.92	-57.72
3	14493.33	44.23 PK	74	-29.77	-58.84	-59.08	4.92	-51.03
4	14493.33	36.57 AV	54	-17.43	-66.8	-66.44	4.92	-58.69
5	21130.6	45.25 PK	74	-28.75	-57.83	-58.06	4.92	-50.01
6	21130.6	38.55 AV	54	-15.45	-64.88	-64.41	4.92	-56.71
7	23945.1	45.58 PK	74	-28.42	-57.12	-58.16	4.92	-49.68
8	23945.1	39.72 AV	54	-14.28	-63.97	-63.03	4.92	-55.54
9	38861.6	38.85 PK	74	-35.15	-64.01	-64.68	4.92	-56.41
10	38861.6	33.17 AV	54	-20.83	-69.73	-70.33	4.92	-62.09

Note: Margin value = Emission Level - Limit value

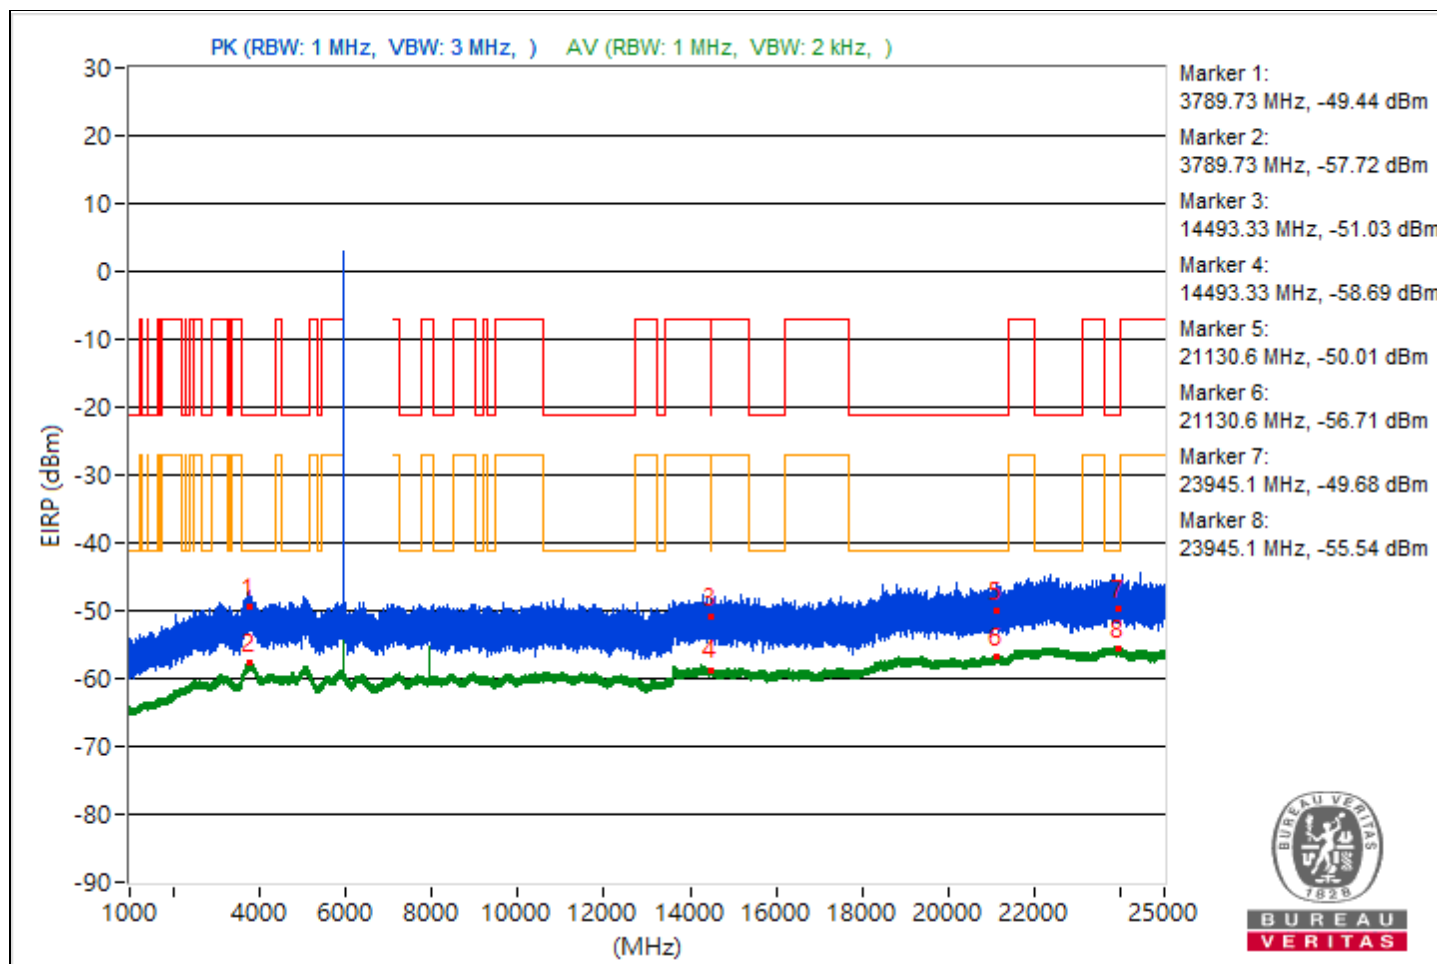


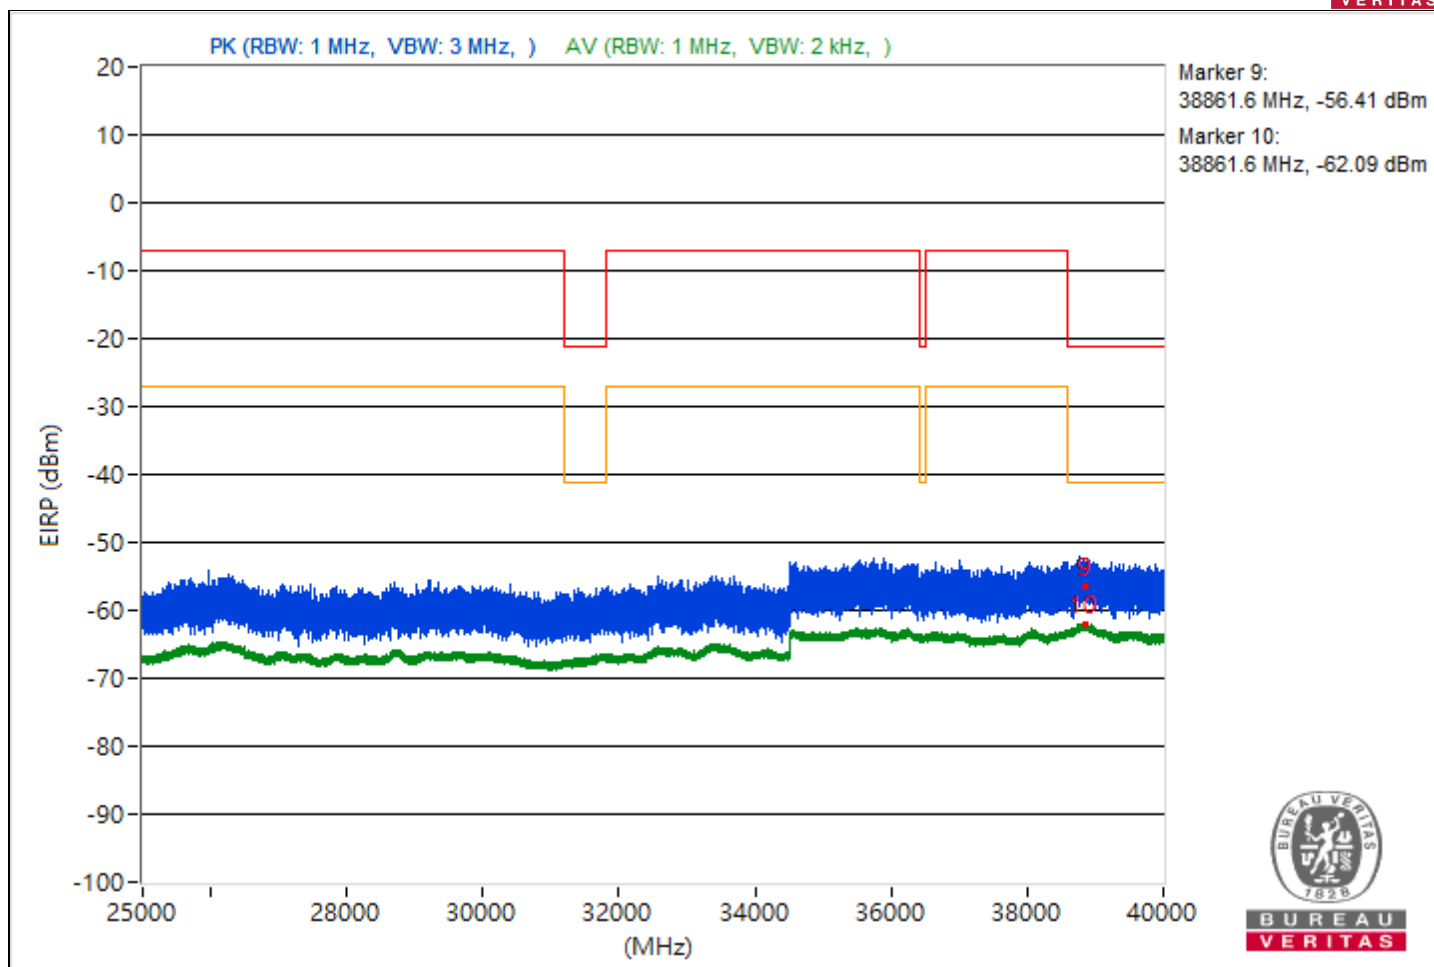


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.44	43.73 PK	74	-30.27	-59.11	-59.84	4.92	-51.53
2	3777.44	37.54 AV	54	-16.46	-65.26	-66.08	4.92	-57.72
3	14472.18	43.57 PK	74	-30.43	-61.28	-58.42	4.92	-51.69
4	14472.18	36.76 AV	54	-17.24	-66.33	-66.53	4.92	-58.5
5	21146.9	44.02 PK	74	-29.98	-58.79	-59.58	4.92	-51.24
6	21146.9	38.54 AV	54	-15.46	-64.32	-65.01	4.92	-56.72
7	23965.2	46.24 PK	74	-27.76	-56.93	-56.97	4.92	-49.02
8	23965.2	39.56 AV	54	-14.44	-63.12	-64.22	4.92	-55.7
9	38888.18	41.33 PK	74	-32.67	-61.04	-62.88	4.92	-53.93
10	38888.18	33.37 AV	54	-20.63	-70.18	-69.49	4.92	-61.89

Note: Margin value = Emission Level - Limit value

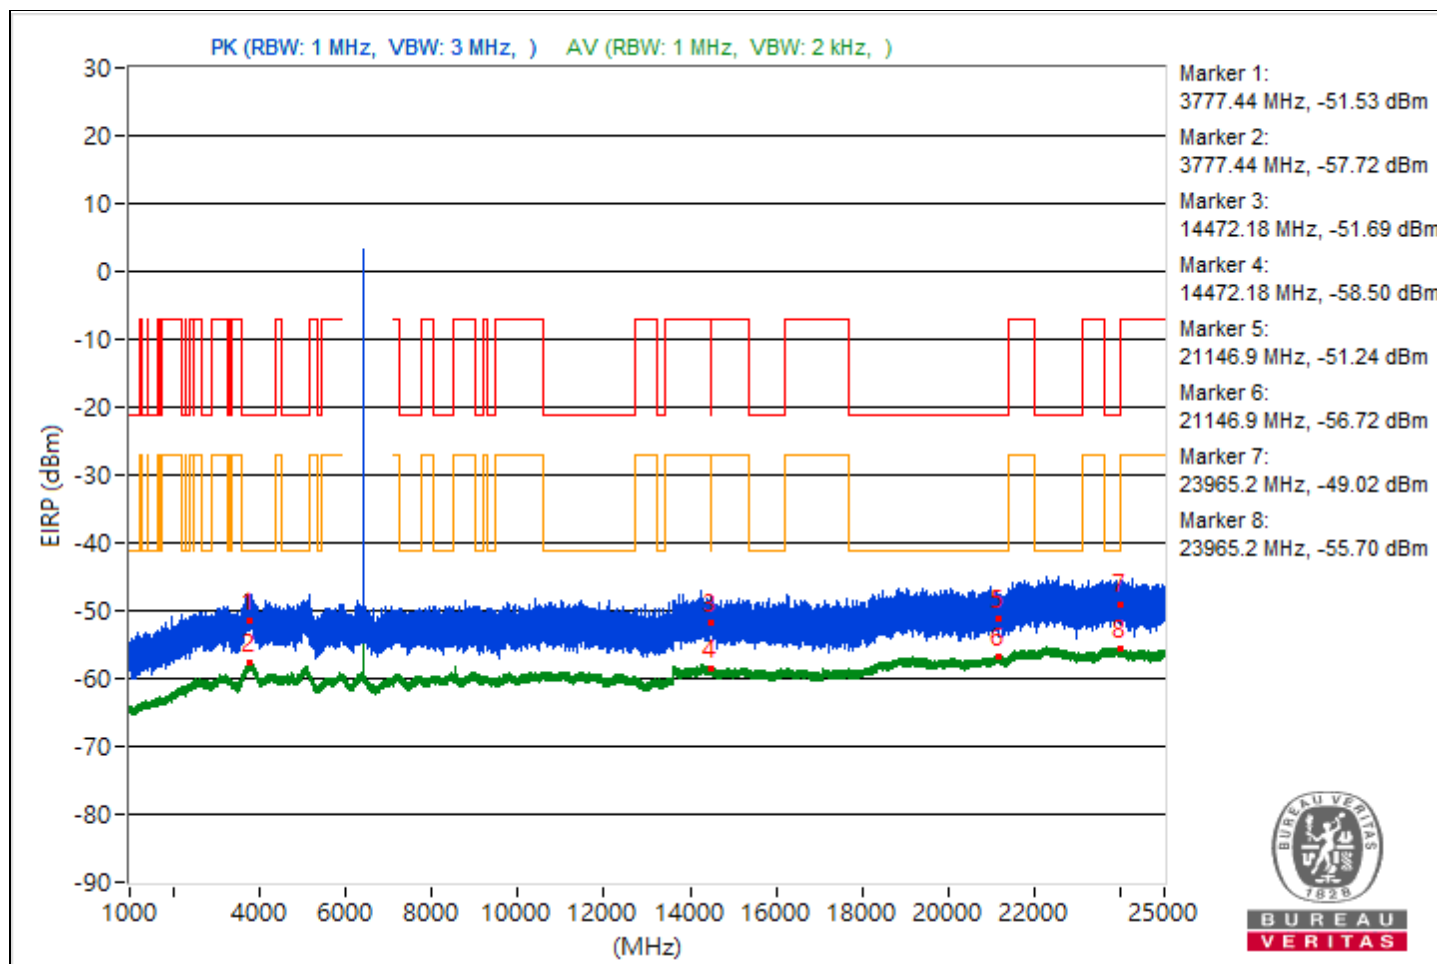


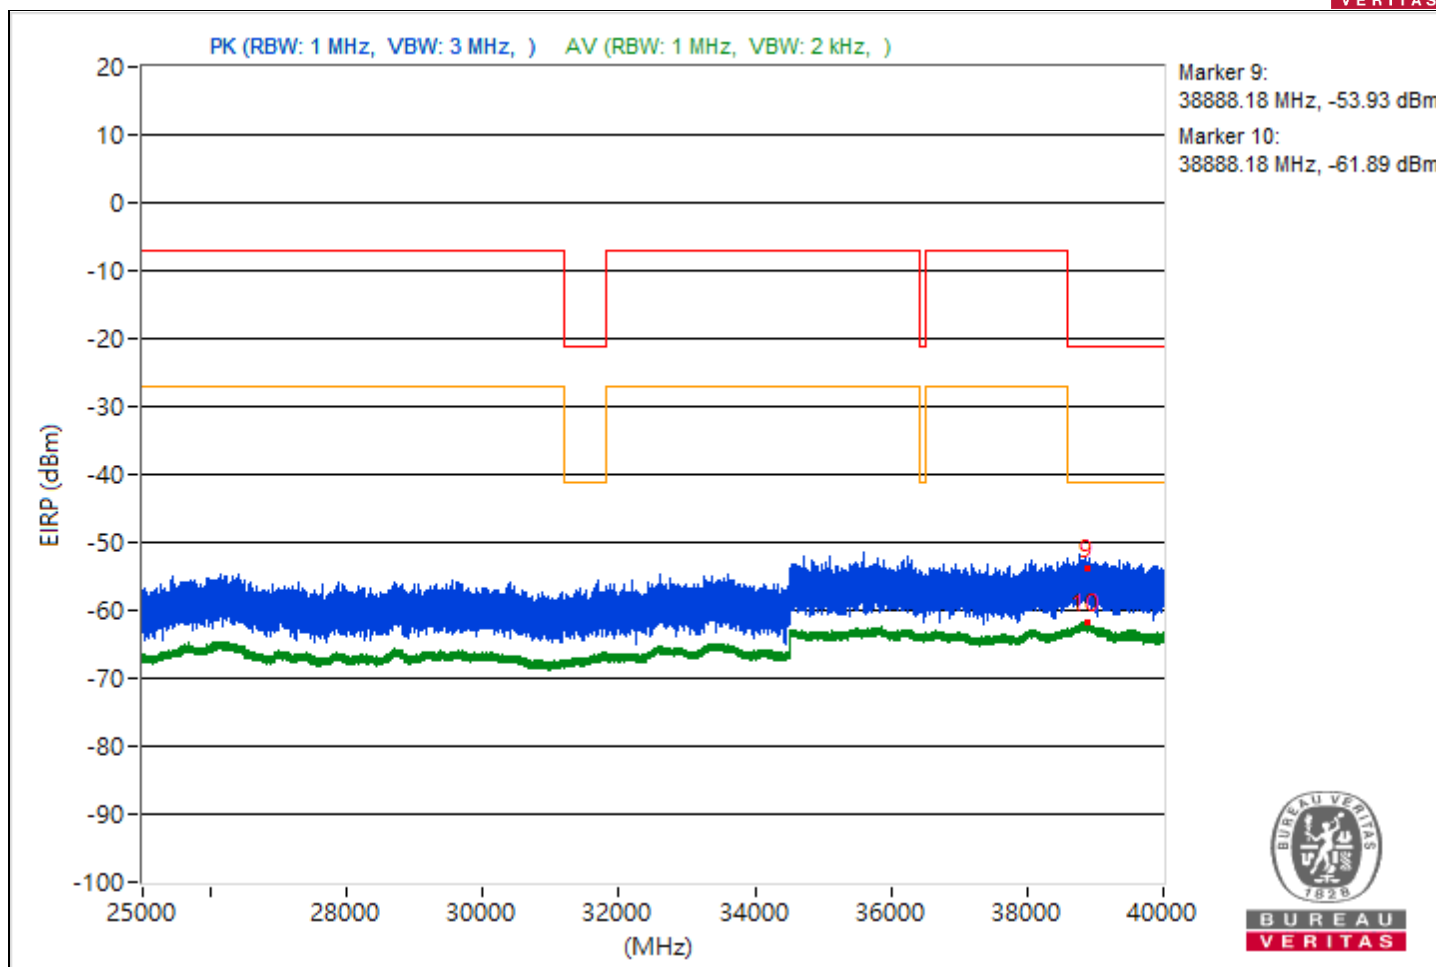


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.39	44.37 PK	74	-29.63	-58.44	-59.23	4.92	-50.89
2	3821.39	37.64 AV	54	-16.36	-65.04	-66.14	4.92	-57.62
3	14490.04	44.01 PK	74	-29.99	-59.9	-58.57	4.92	-51.25
4	14490.04	36.68 AV	54	-17.32	-66.63	-66.4	4.92	-58.58
5	21154	46.62 PK	74	-27.38	-56.4	-56.75	4.92	-48.64
6	21154	38.45 AV	54	-15.55	-64.23	-65.32	4.92	-56.81
7	22373	45.12 PK	74	-28.88	-57.39	-58.87	4.92	-50.14
8	22373	39.81 AV	54	-14.19	-64.04	-62.8	4.92	-55.45
9	38825.69	40.64 PK	74	-33.36	-64.57	-61.18	4.92	-54.62
10	38825.69	33.41 AV	54	-20.59	-69.45	-70.13	4.92	-61.85

Note: Margin value = Emission Level - Limit value

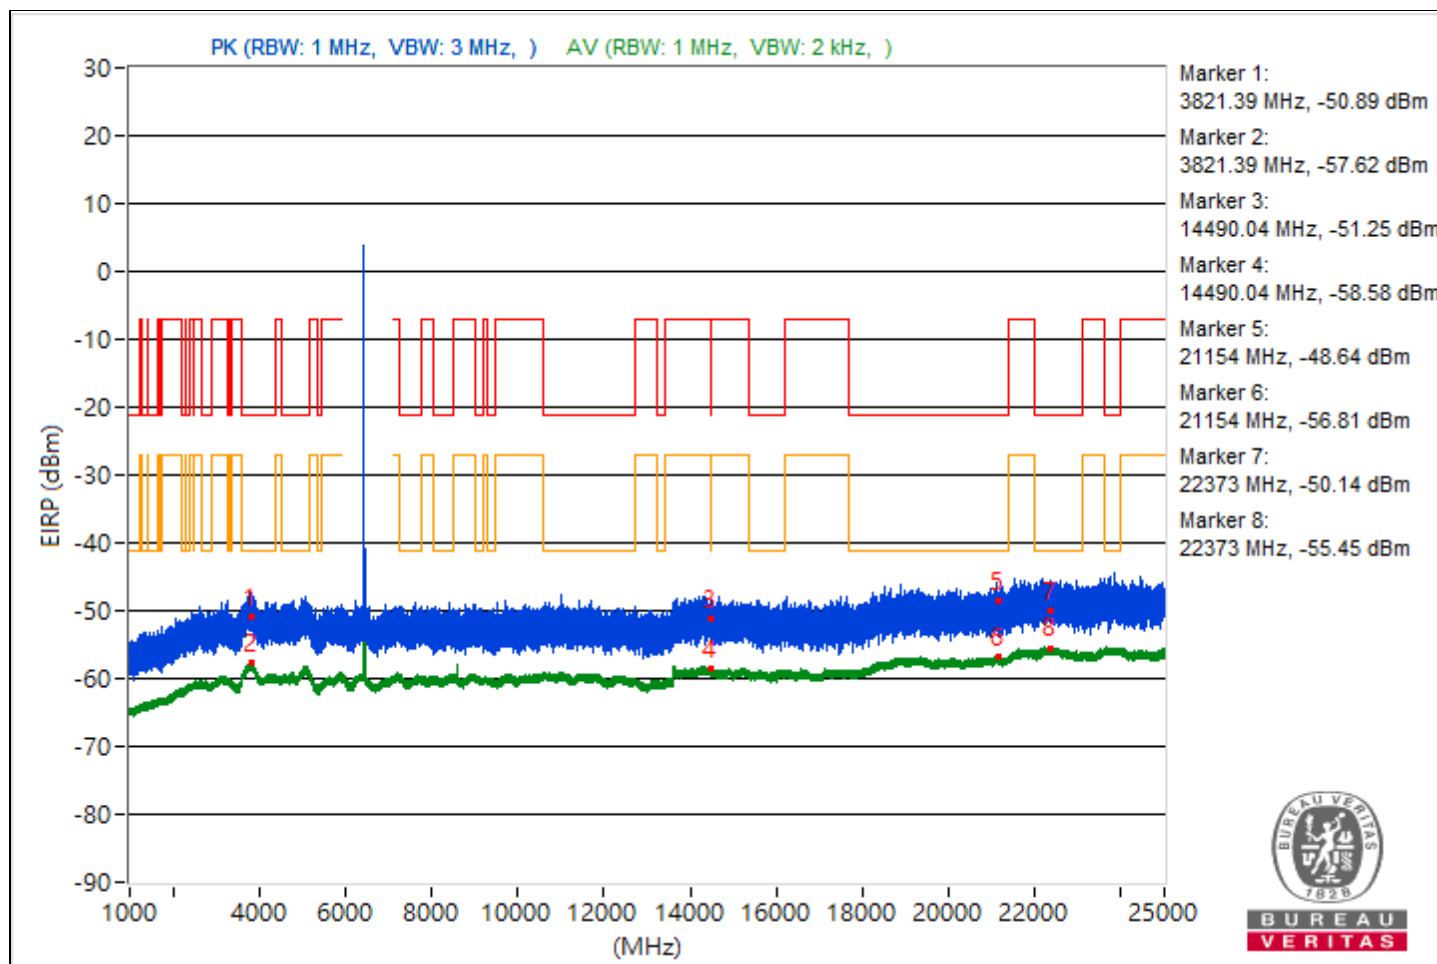


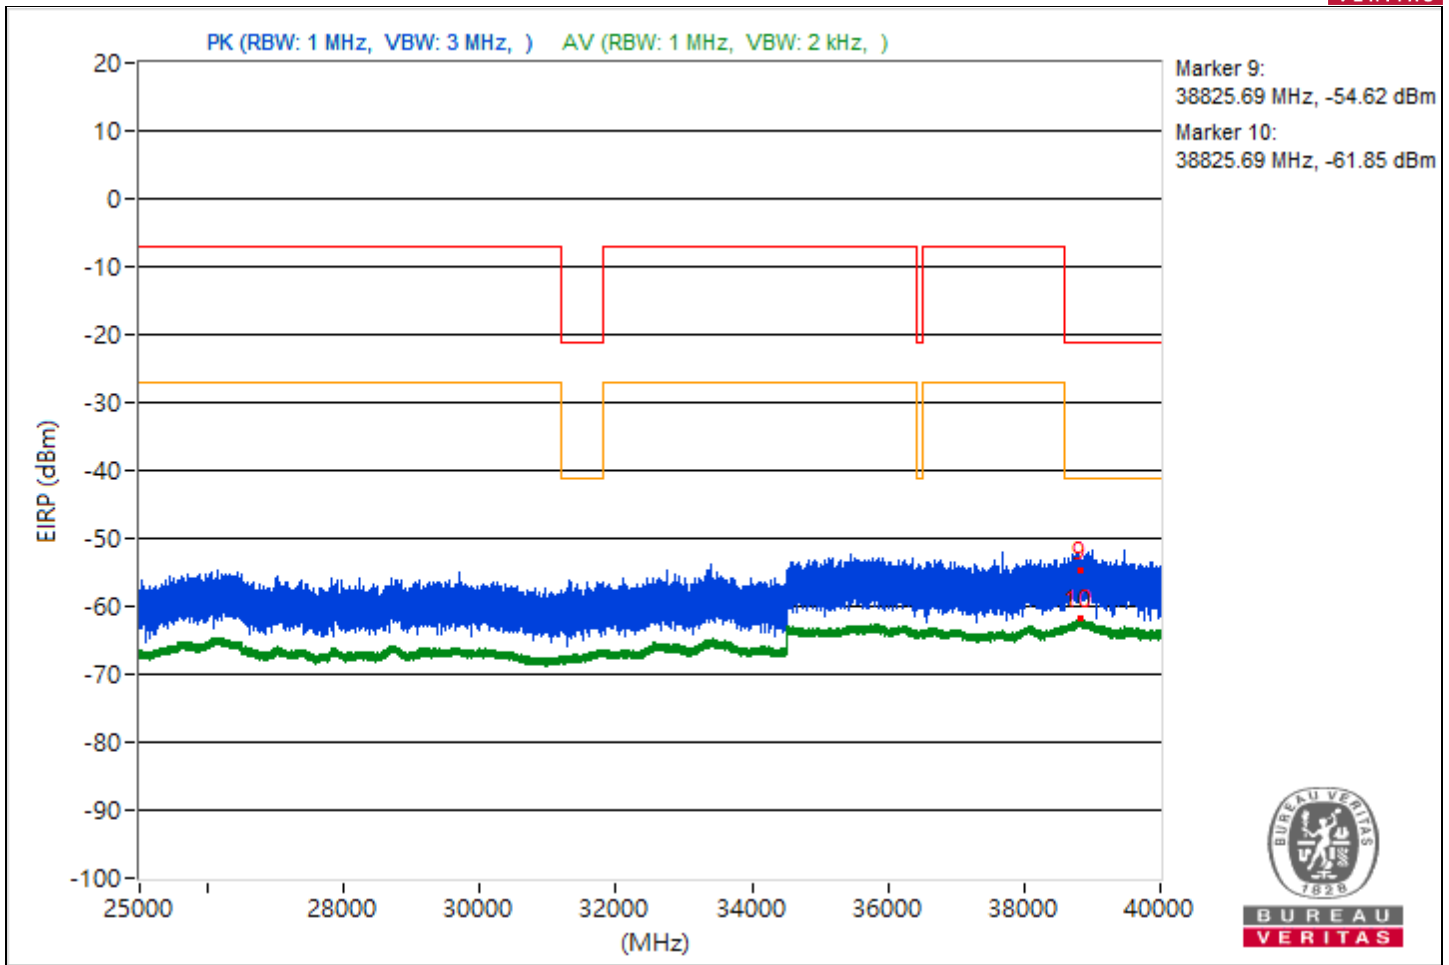


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3781.57	44.49 PK	74	-29.51	-58.85	-58.56	4.92	-50.77
2	3781.57	37.5 AV	54	-16.5	-66.03	-65.37	4.92	-57.76
3	14480.62	42.75 PK	74	-31.25	-60.36	-60.51	4.92	-52.51
4	14480.62	36.95 AV	54	-17.05	-66.33	-66.16	4.92	-58.31
5	21068.1	43.76 PK	74	-30.24	-59.74	-59.13	4.92	-51.5
6	21068.1	38.39 AV	54	-15.61	-65.14	-64.49	4.92	-56.87
7	22231.7	46.48 PK	74	-27.52	-56.1	-57.43	4.92	-48.78
8	22231.7	39.84 AV	54	-14.16	-63.73	-63	4.92	-55.42
9	38856.62	39.89 PK	74	-34.11	-66.41	-61.51	4.92	-55.37
10	38856.62	33.38 AV	54	-20.62	-70.01	-69.61	4.92	-61.88

Note: Margin value = Emission Level - Limit value

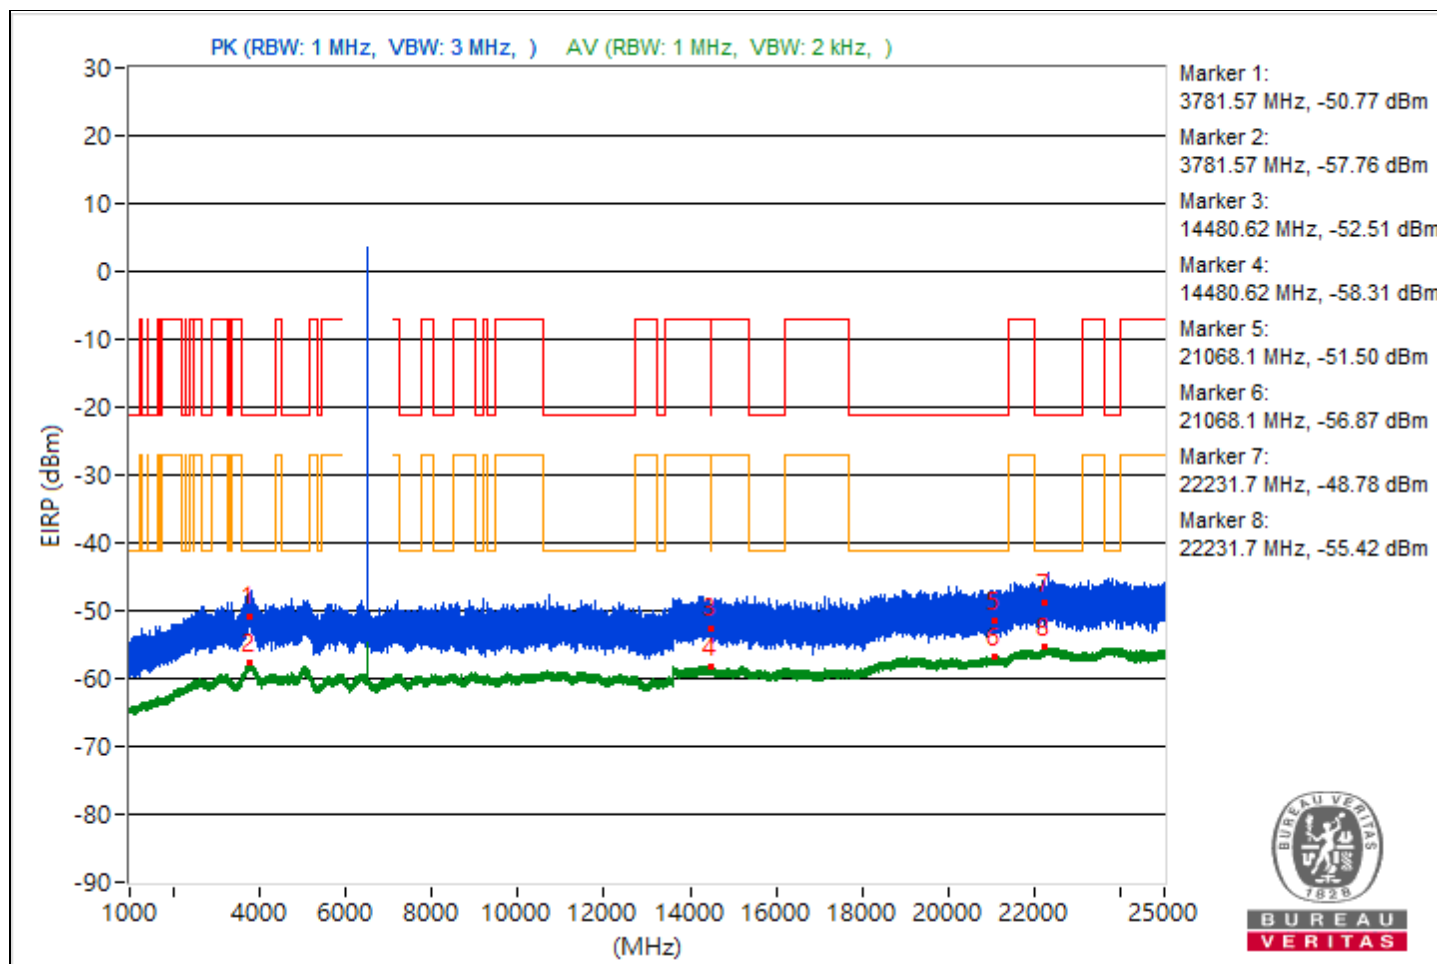


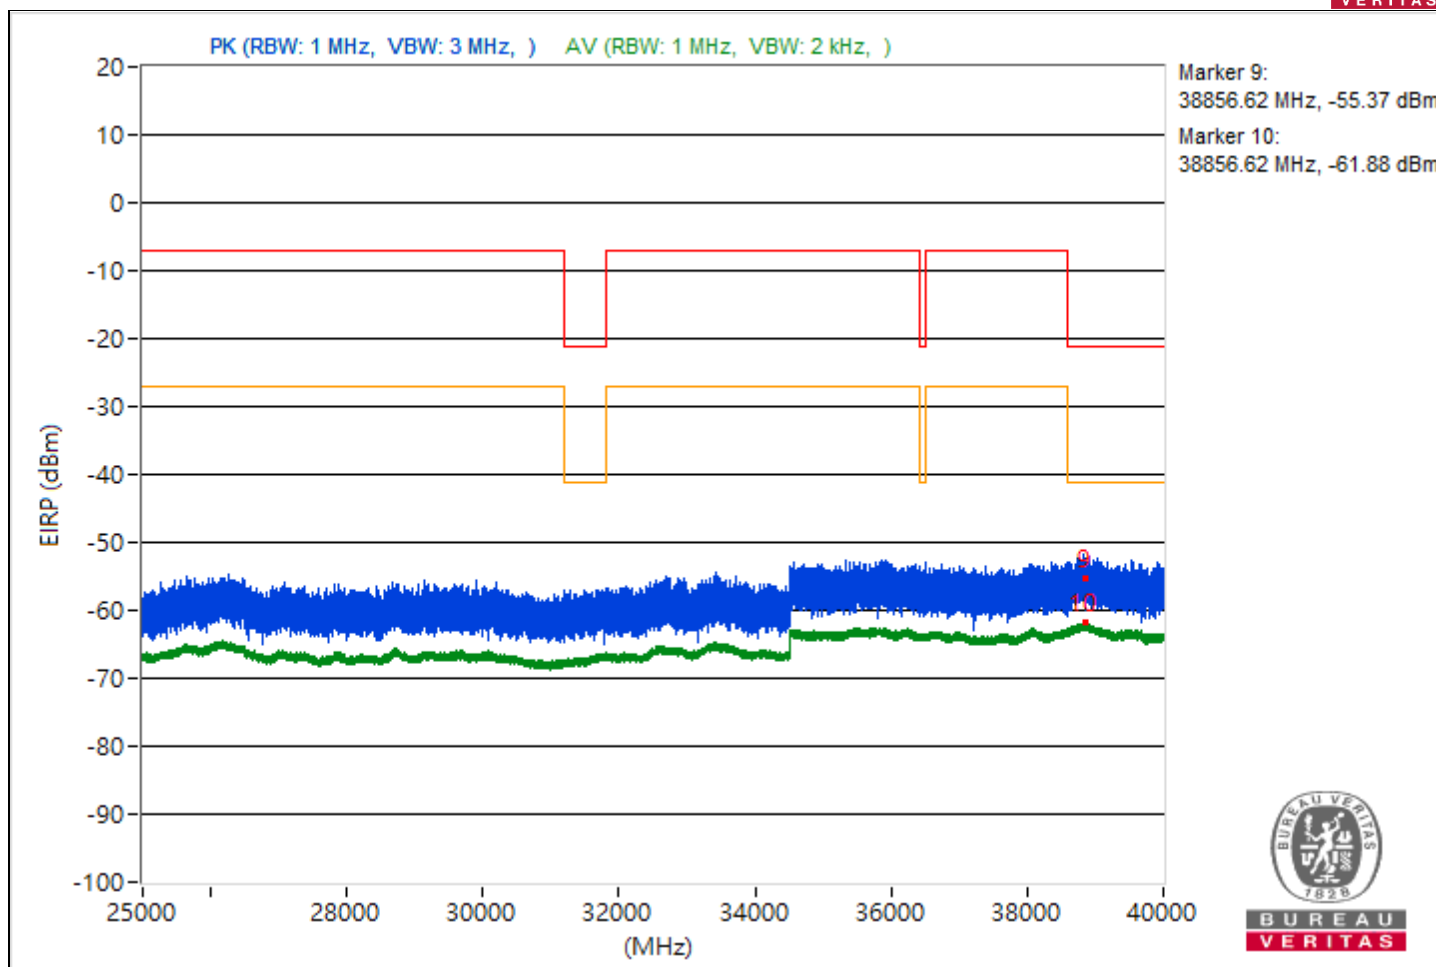


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3757.3	45.42 PK	74	-28.58	-58.09	-57.47	4.92	-49.84
2	3757.3	37.72 AV	54	-16.28	-64.96	-66.03	4.92	-57.54
3	14479.47	43.75 PK	74	-30.25	-59.31	-59.57	4.92	-51.51
4	14479.47	36.66 AV	54	-17.34	-66.13	-66.98	4.92	-58.6
5	21237	46.77 PK	74	-27.23	-57.12	-55.82	4.92	-48.49
6	21237	38.57 AV	54	-15.43	-64.83	-64.42	4.92	-56.69
7	22255	46.34 PK	74	-27.66	-58.08	-55.9	4.92	-48.92
8	22255	39.82 AV	54	-14.18	-62.88	-63.93	4.92	-55.44
9	38832.44	39.16 PK	74	-34.84	-63.86	-64.21	4.92	-56.1
10	38832.44	33.36 AV	54	-20.64	-69.58	-70.1	4.92	-61.9

Note: Margin value = Emission Level - Limit value

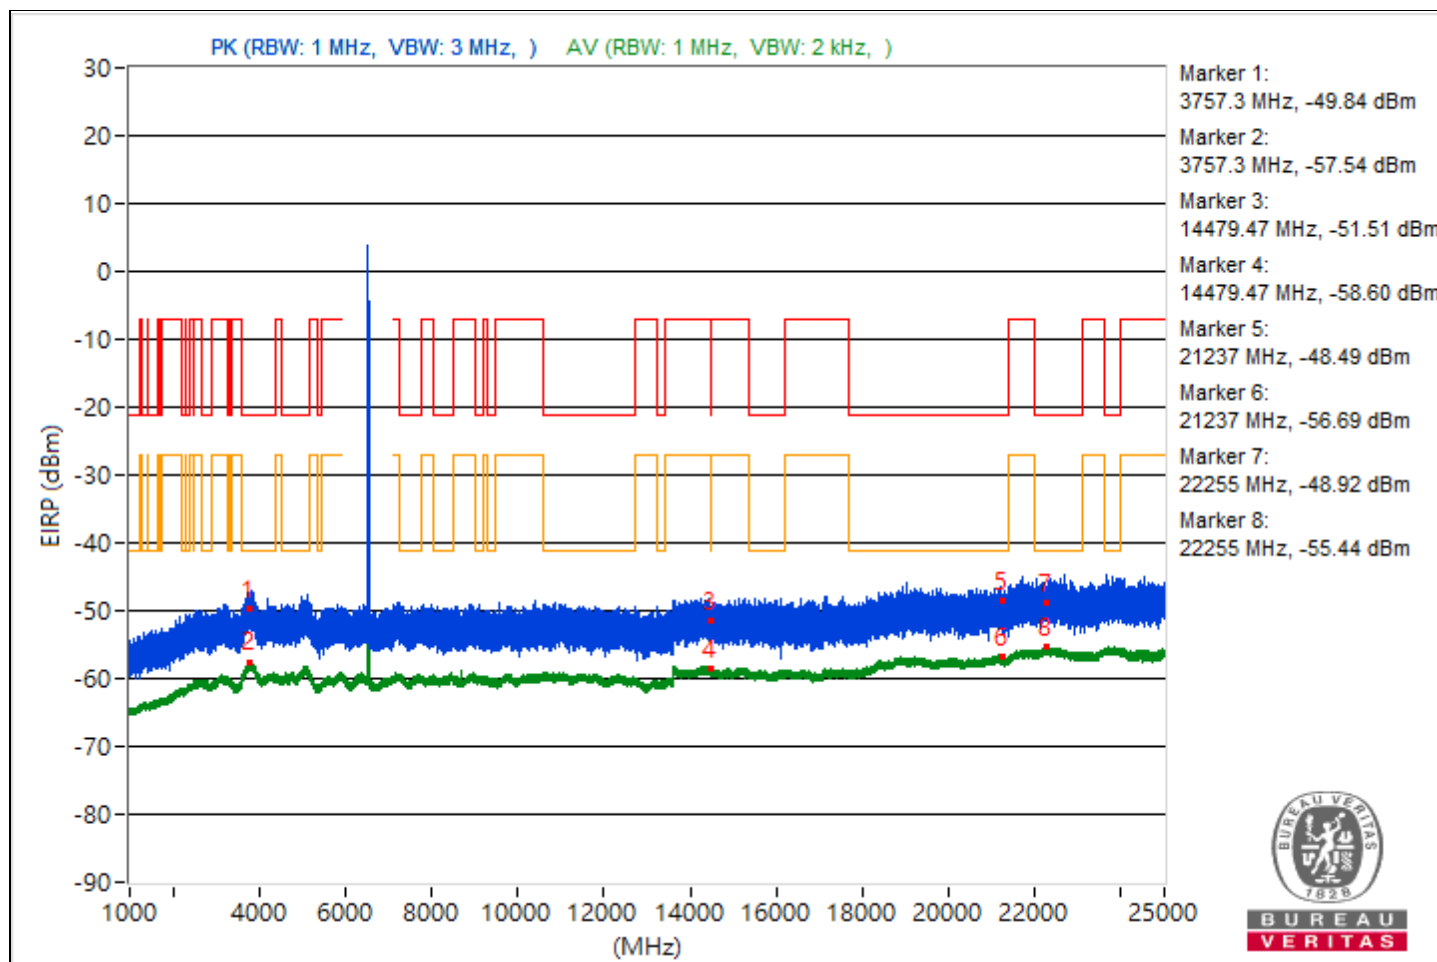


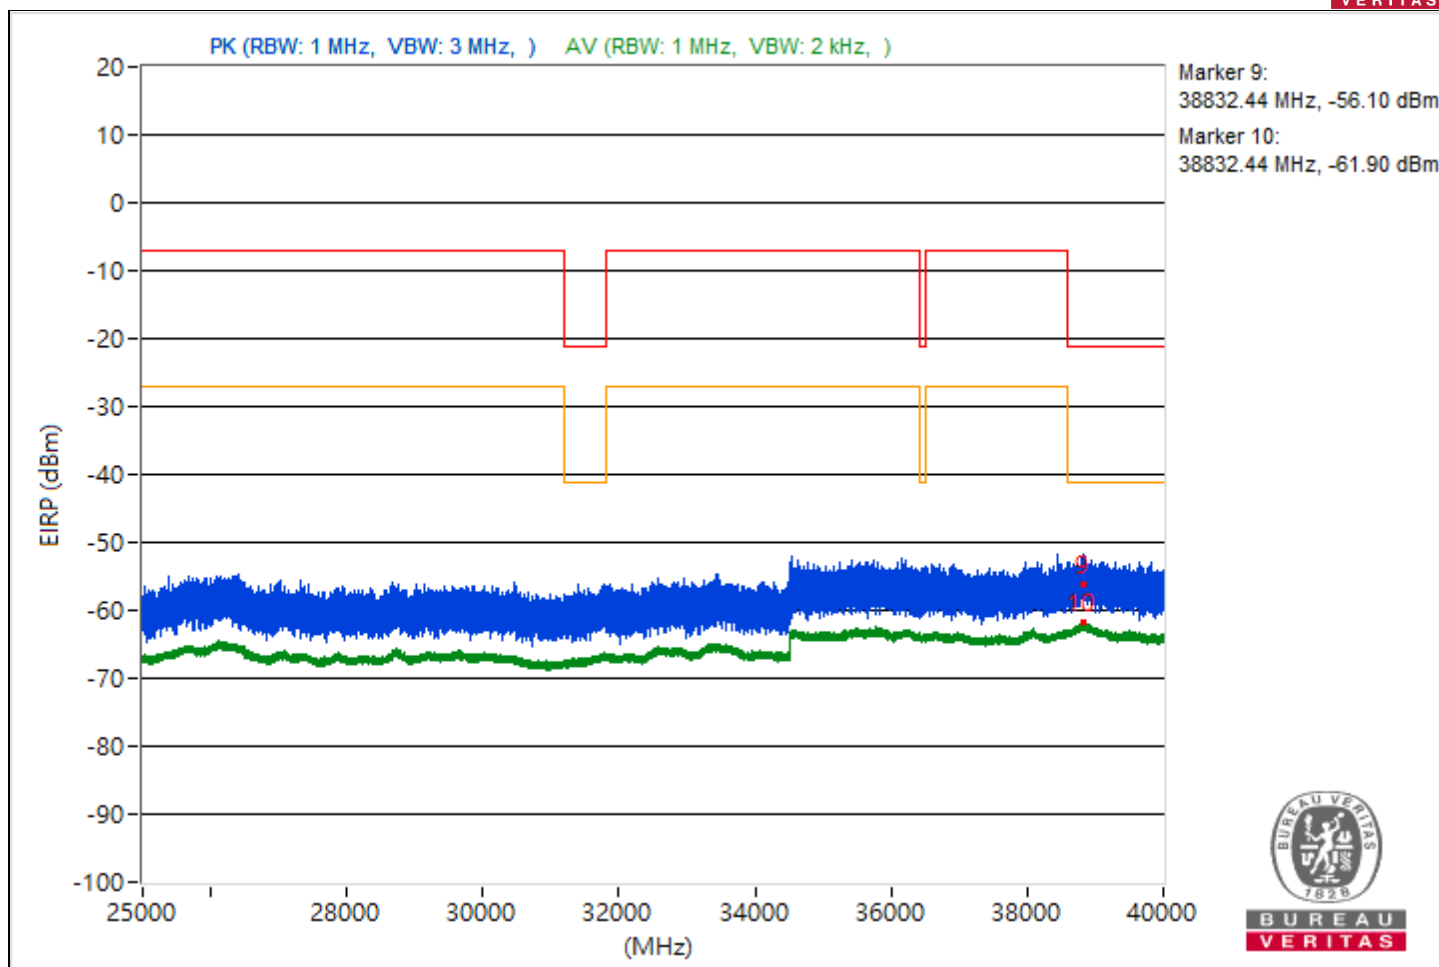


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3757.53	44.74 PK	74	-29.26	-57.66	-59.43	4.92	-50.52
2	3757.53	37.55 AV	54	-16.45	-65.36	-65.95	4.92	-57.71
3	14487.02	43.43 PK	74	-30.57	-61.27	-58.63	4.92	-51.83
4	14487.02	36.87 AV	54	-17.13	-66.51	-66.14	4.92	-58.39
5	21193.1	46.31 PK	74	-27.69	-55.93	-58.09	4.92	-48.95
6	21193.1	38.49 AV	54	-15.51	-64.38	-65.06	4.92	-56.77
7	22288.8	46.59 PK	74	-27.41	-57.48	-55.86	4.92	-48.67
8	22288.8	39.69 AV	54	-14.31	-63.95	-63.09	4.92	-55.57
9	38837.51	40.45 PK	74	-33.55	-63.68	-61.97	4.92	-54.81
10	38837.51	33.52 AV	54	-20.48	-69.98	-69.37	4.92	-61.74

Note: Margin value = Emission Level - Limit value

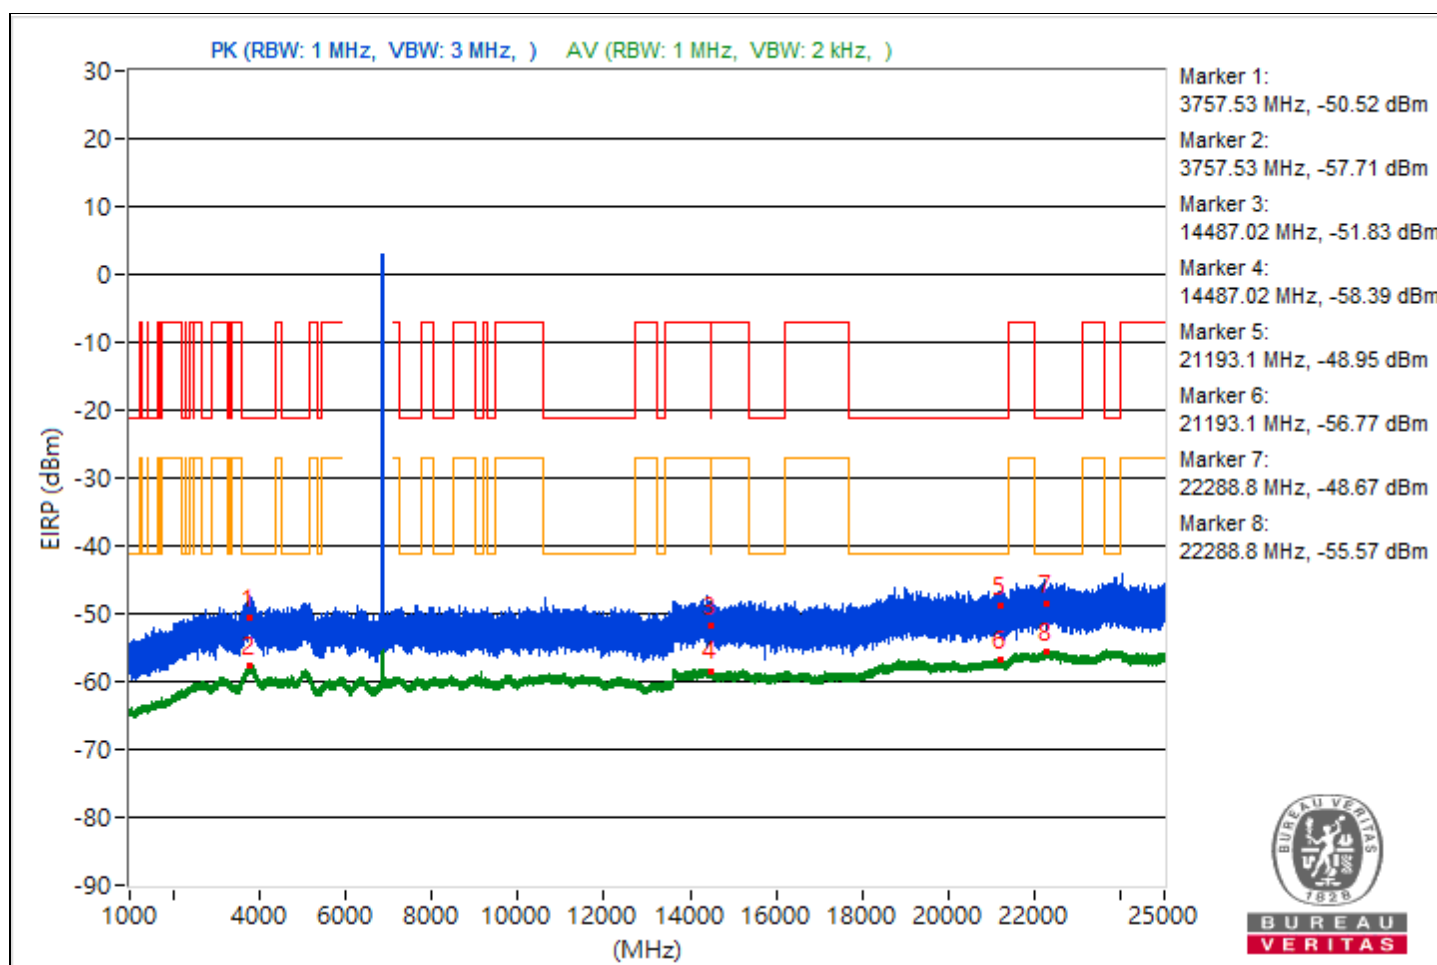


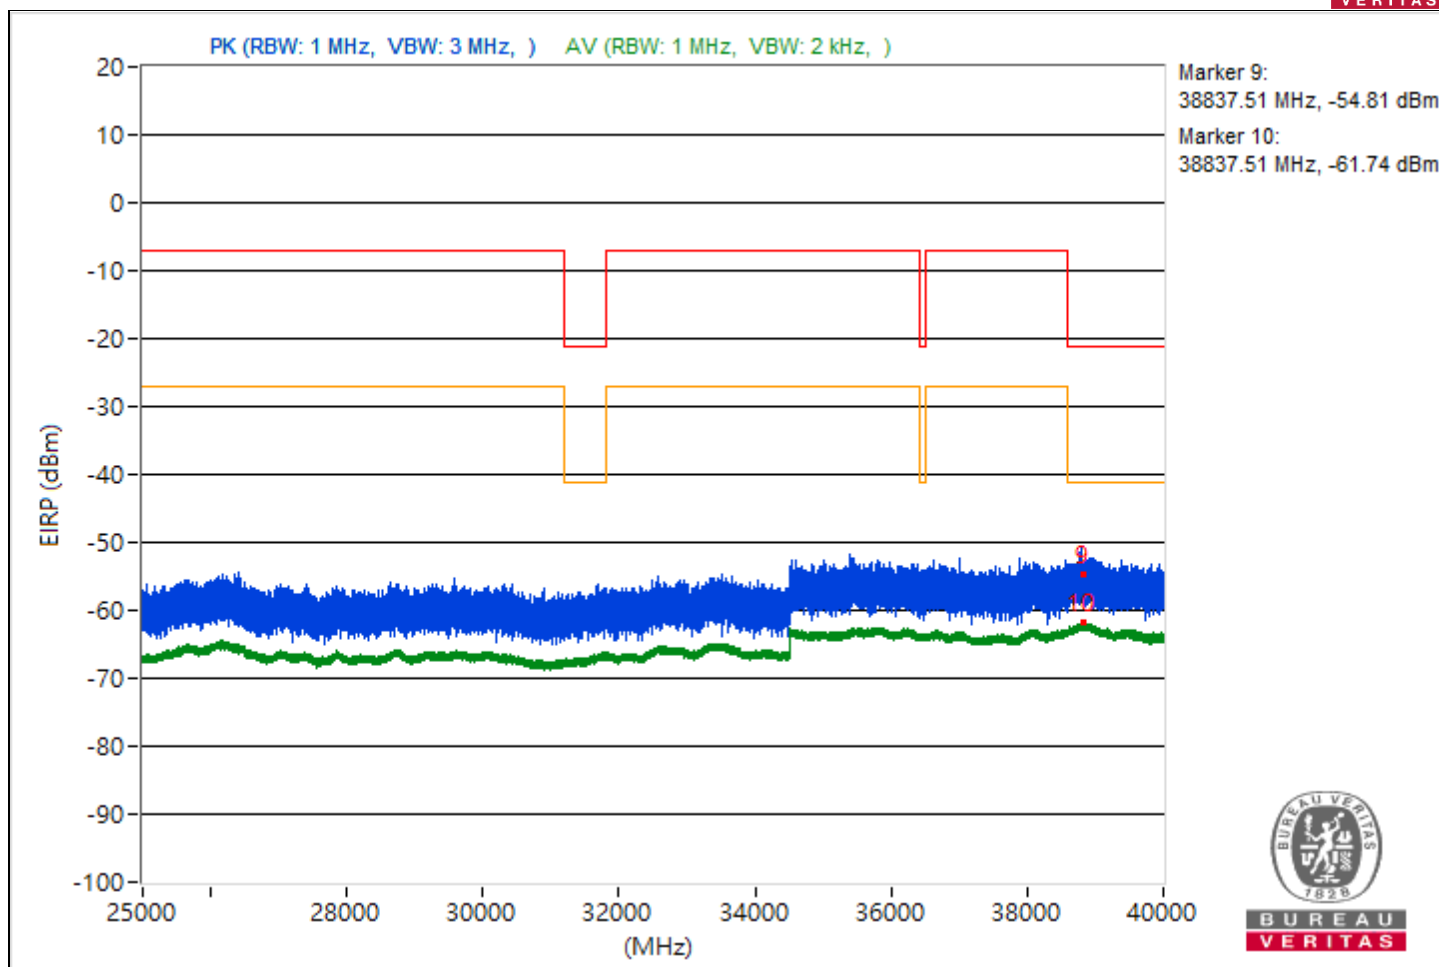


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3772.16	44.89 PK	74	-29.11	-60.2	-56.98	4.92	-50.37
2	3772.16	37.49 AV	54	-16.51	-65.13	-66.36	4.92	-57.77
3	14482.58	43.65 PK	74	-30.35	-58.52	-60.89	4.92	-51.61
4	14482.58	36.57 AV	54	-17.43	-67.01	-66.27	4.92	-58.69
5	21083	44.62 PK	74	-29.38	-58.48	-58.66	4.92	-50.64
6	21083	38.47 AV	54	-15.53	-65.34	-64.17	4.92	-56.79
7	22310.6	46.62 PK	74	-27.38	-56.7	-56.45	4.92	-48.64
8	22310.6	40 AV	54	-14	-62.79	-63.62	4.92	-55.26
9	38879.73	38.47 PK	74	-35.53	-66.3	-63.57	4.92	-56.79
10	38879.73	33.37 AV	54	-20.63	-70.12	-69.54	4.92	-61.89

Note: Margin value = Emission Level - Limit value

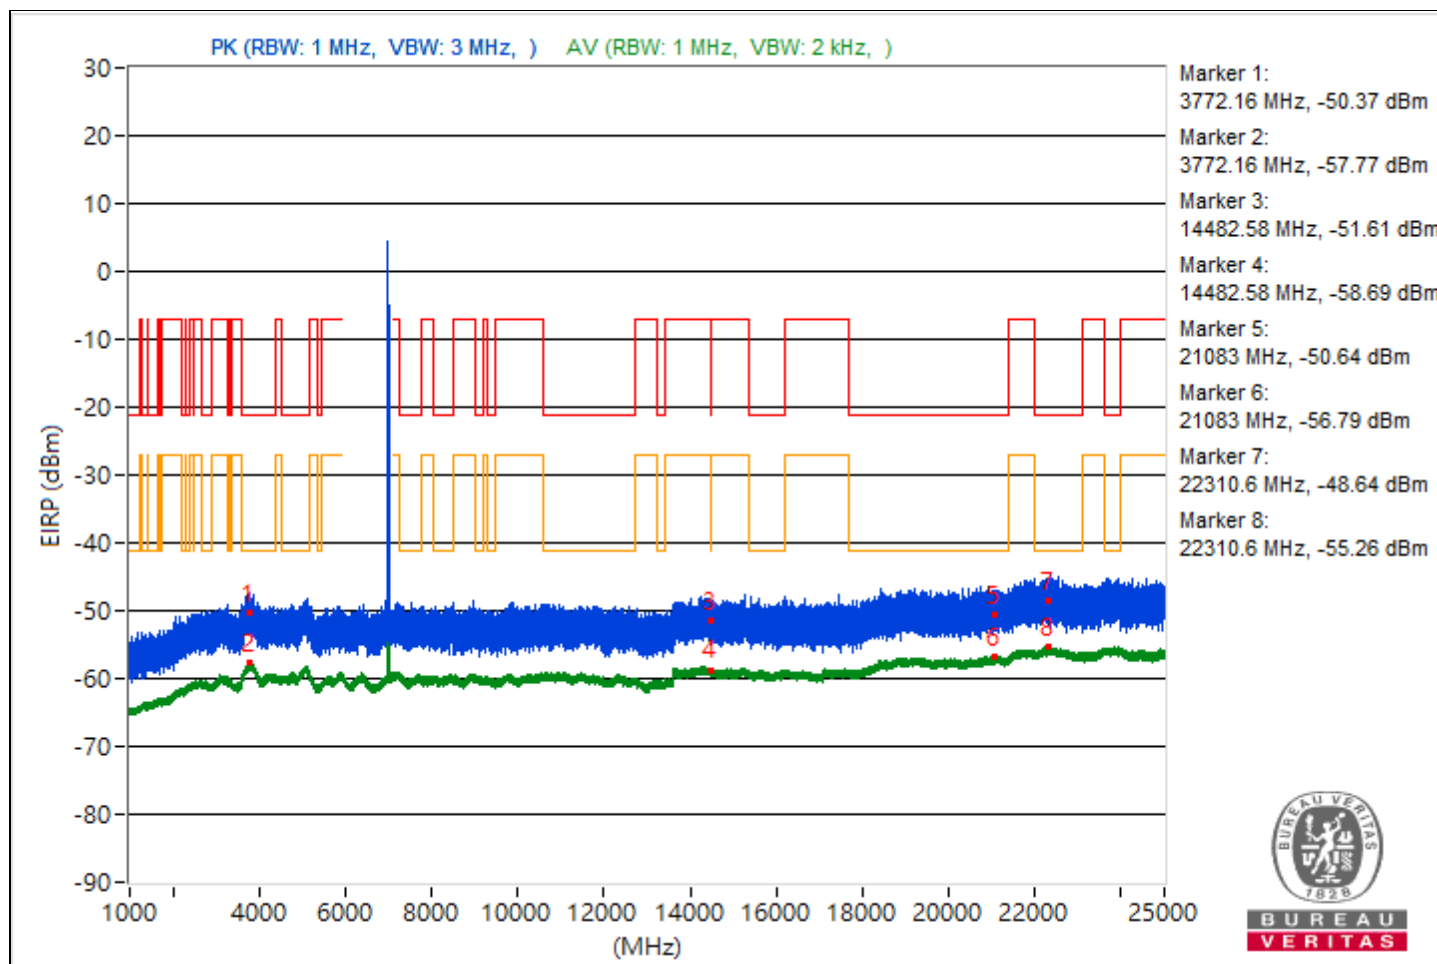


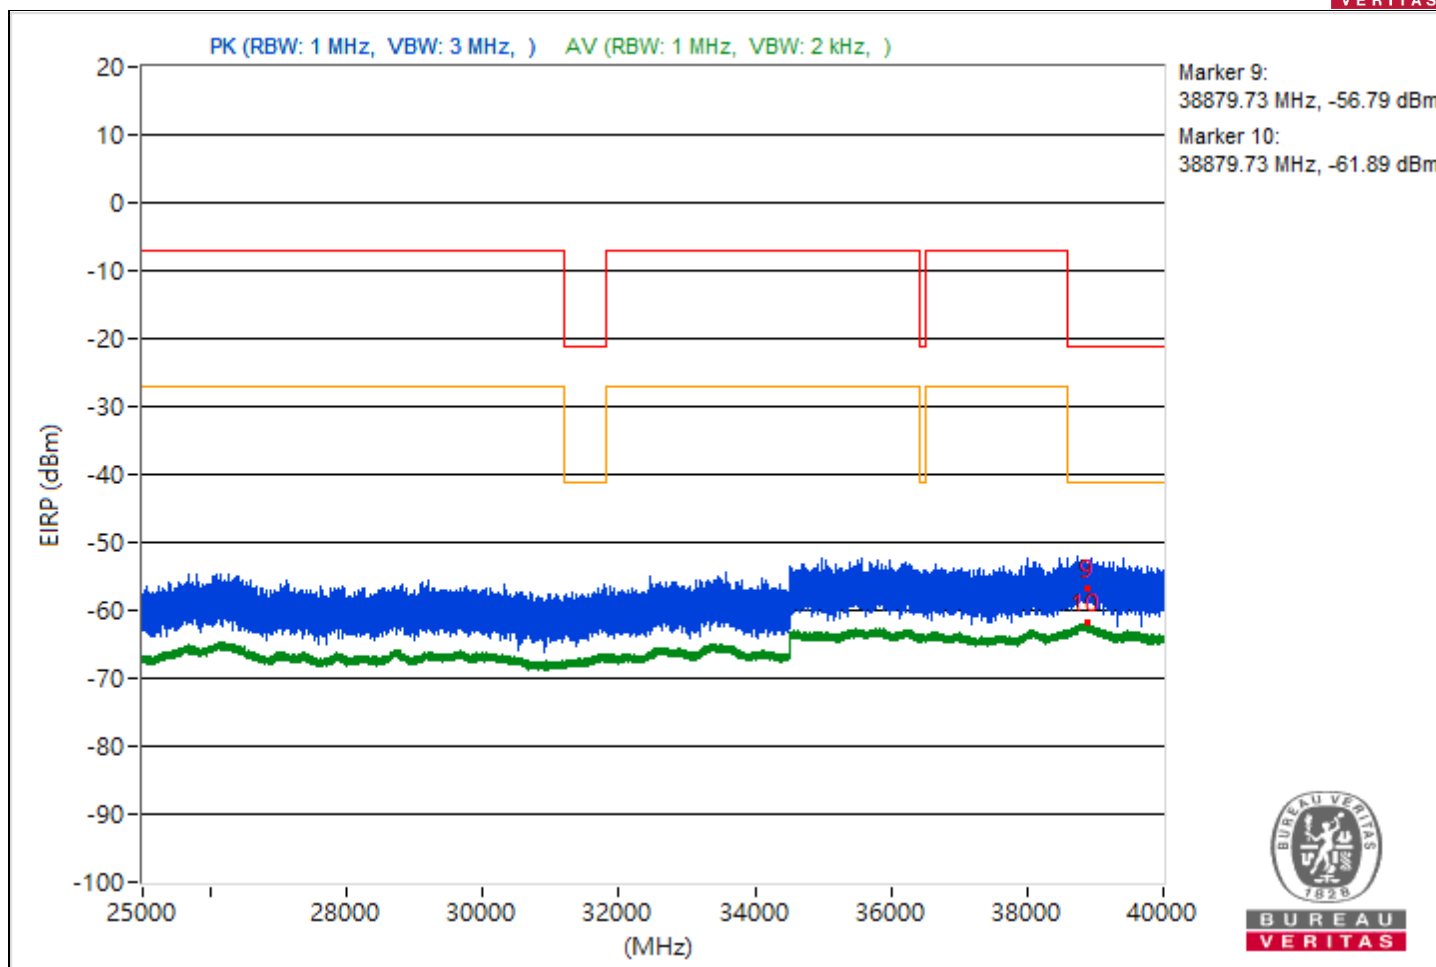


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.74	46.87 PK	74	-27.13	-57.57	-55.35	4.92	-48.39
2	3797.74	37.37 AV	54	-16.63	-65.44	-66.25	4.92	-57.89
3	14479.11	44.61 PK	74	-29.39	-56.43	-63.02	4.92	-50.65
4	14479.11	37.07 AV	54	-16.93	-66.52	-65.76	4.92	-58.19
5	21064.2	43.63 PK	74	-30.37	-58.92	-60.32	4.92	-51.63
6	21064.2	38.66 AV	54	-15.34	-64.92	-64.18	4.92	-56.6
7	22206.1	45.46 PK	74	-28.54	-56.98	-58.62	4.92	-49.8
8	22206.1	39.65 AV	54	-14.35	-63.07	-64.06	4.92	-55.61
9	38831.91	39.88 PK	74	-34.12	-62.21	-64.8	4.92	-55.38
10	38831.91	33.37 AV	54	-20.63	-70.13	-69.54	4.92	-61.89

Note: Margin value = Emission Level - Limit value

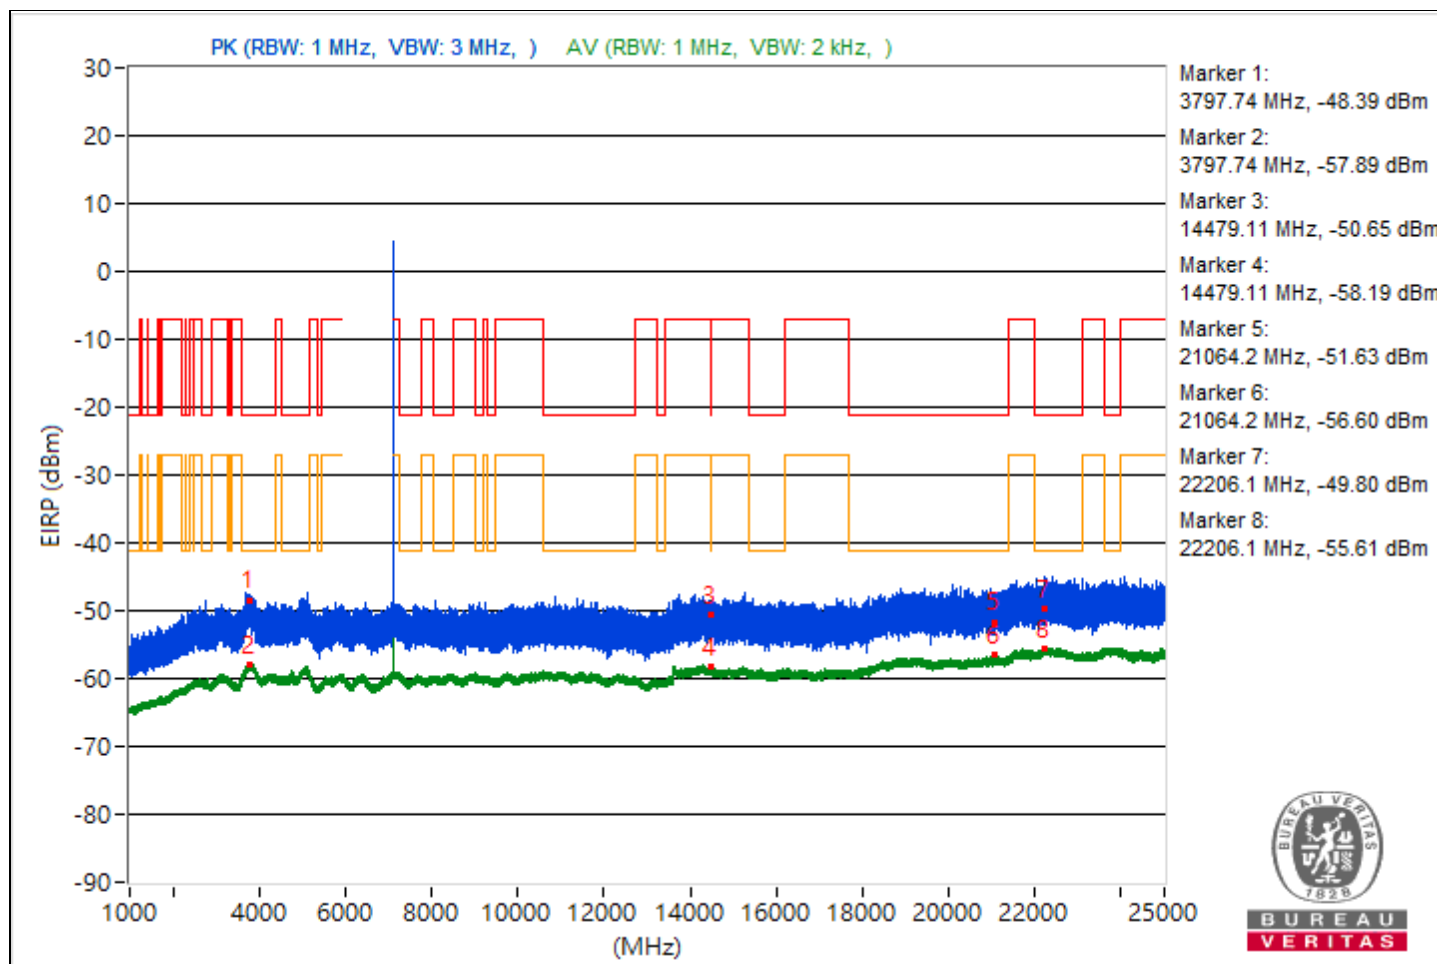


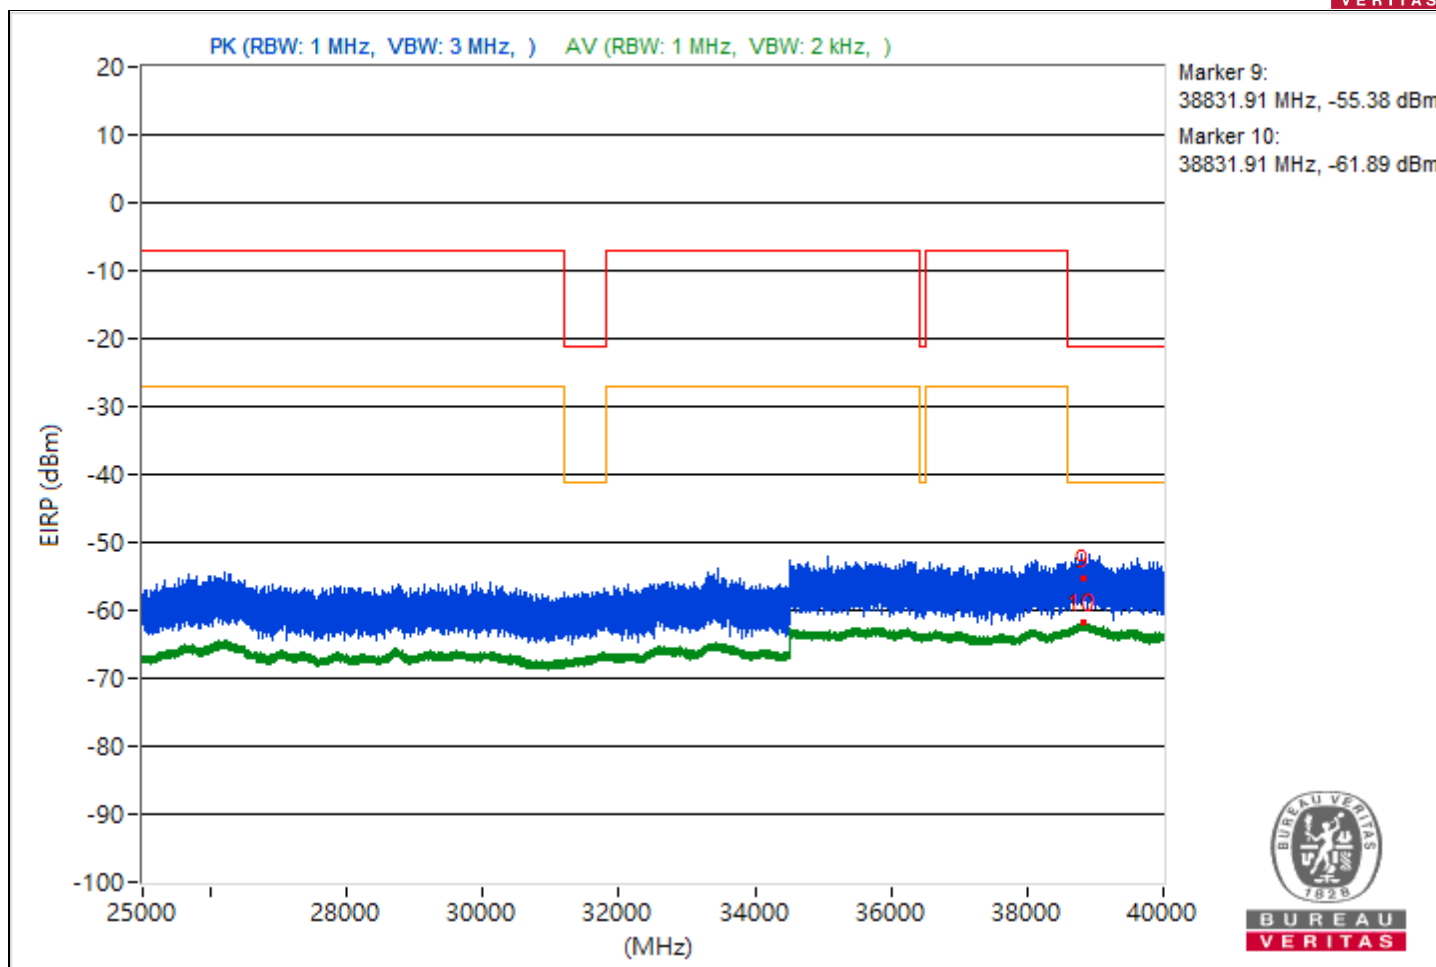


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3799.53	46.17 PK	74	-27.83	-56.07	-58.25	4.92	-49.09
2	3799.53	37.51 AV	54	-16.49	-65.35	-66.04	4.92	-57.75
3	14470.76	43.85 PK	74	-30.15	-58.8	-59.95	4.92	-51.41
4	14470.76	36.64 AV	54	-17.36	-66.29	-66.83	4.92	-58.62
5	21104.4	44.42 PK	74	-29.58	-58.41	-59.17	4.92	-50.84
6	21104.4	38.68 AV	54	-15.32	-64.28	-64.74	4.92	-56.58
7	22479.4	46.3 PK	74	-27.7	-57.59	-56.29	4.92	-48.96
8	22479.4	39.72 AV	54	-14.28	-62.98	-64.02	4.92	-55.54
9	38805.16	41.12 PK	74	-32.88	-61.97	-62.17	4.92	-54.14
10	38805.16	33.51 AV	54	-20.49	-69.96	-69.42	4.92	-61.75

Note: Margin value = Emission Level - Limit value

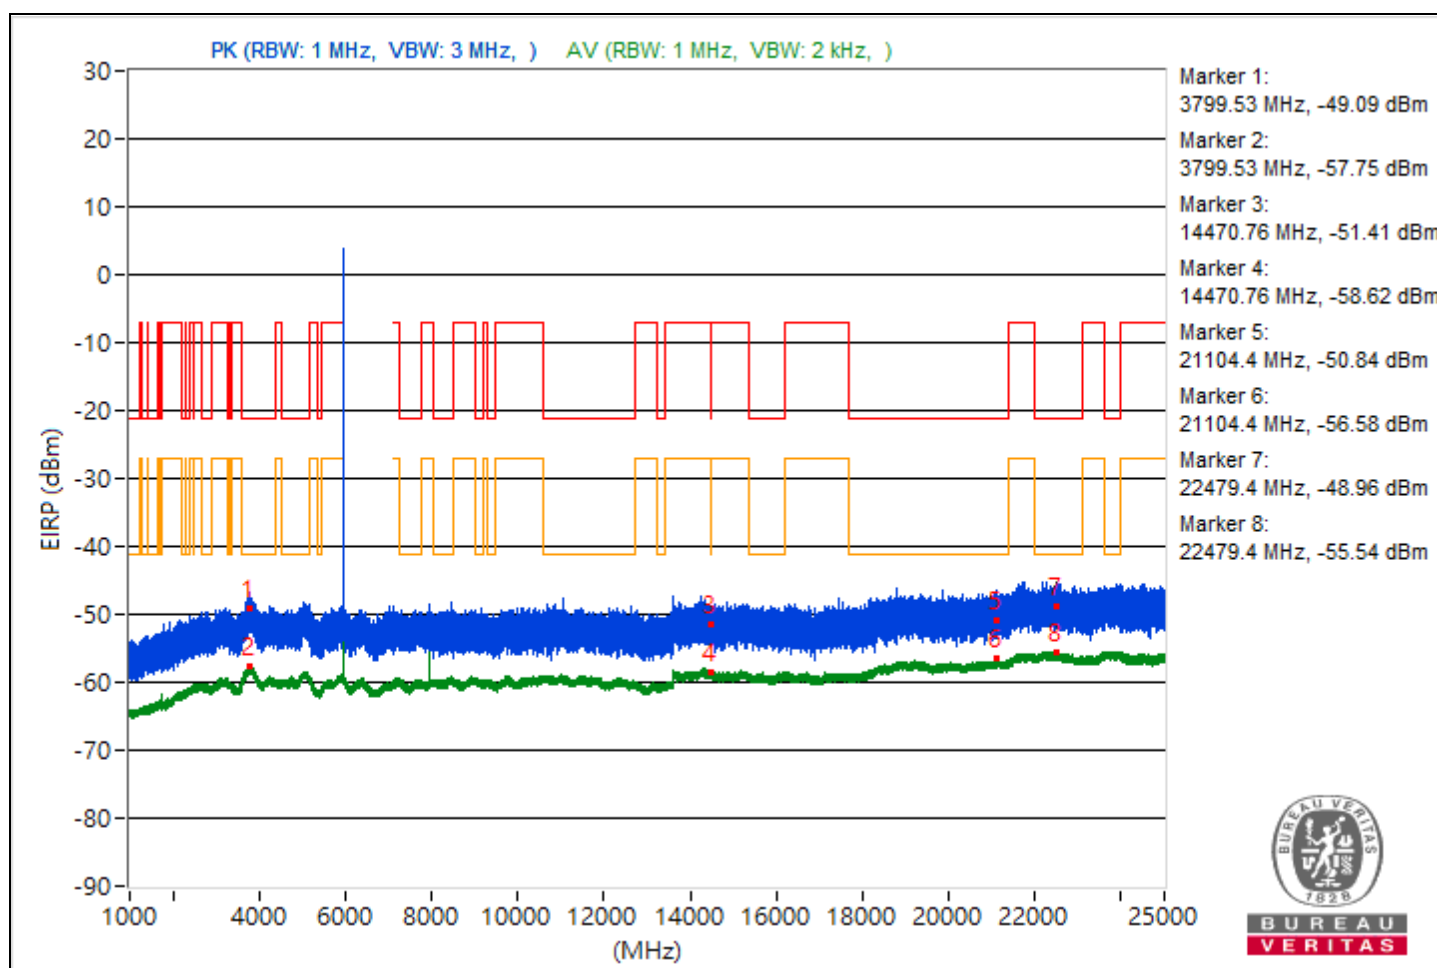


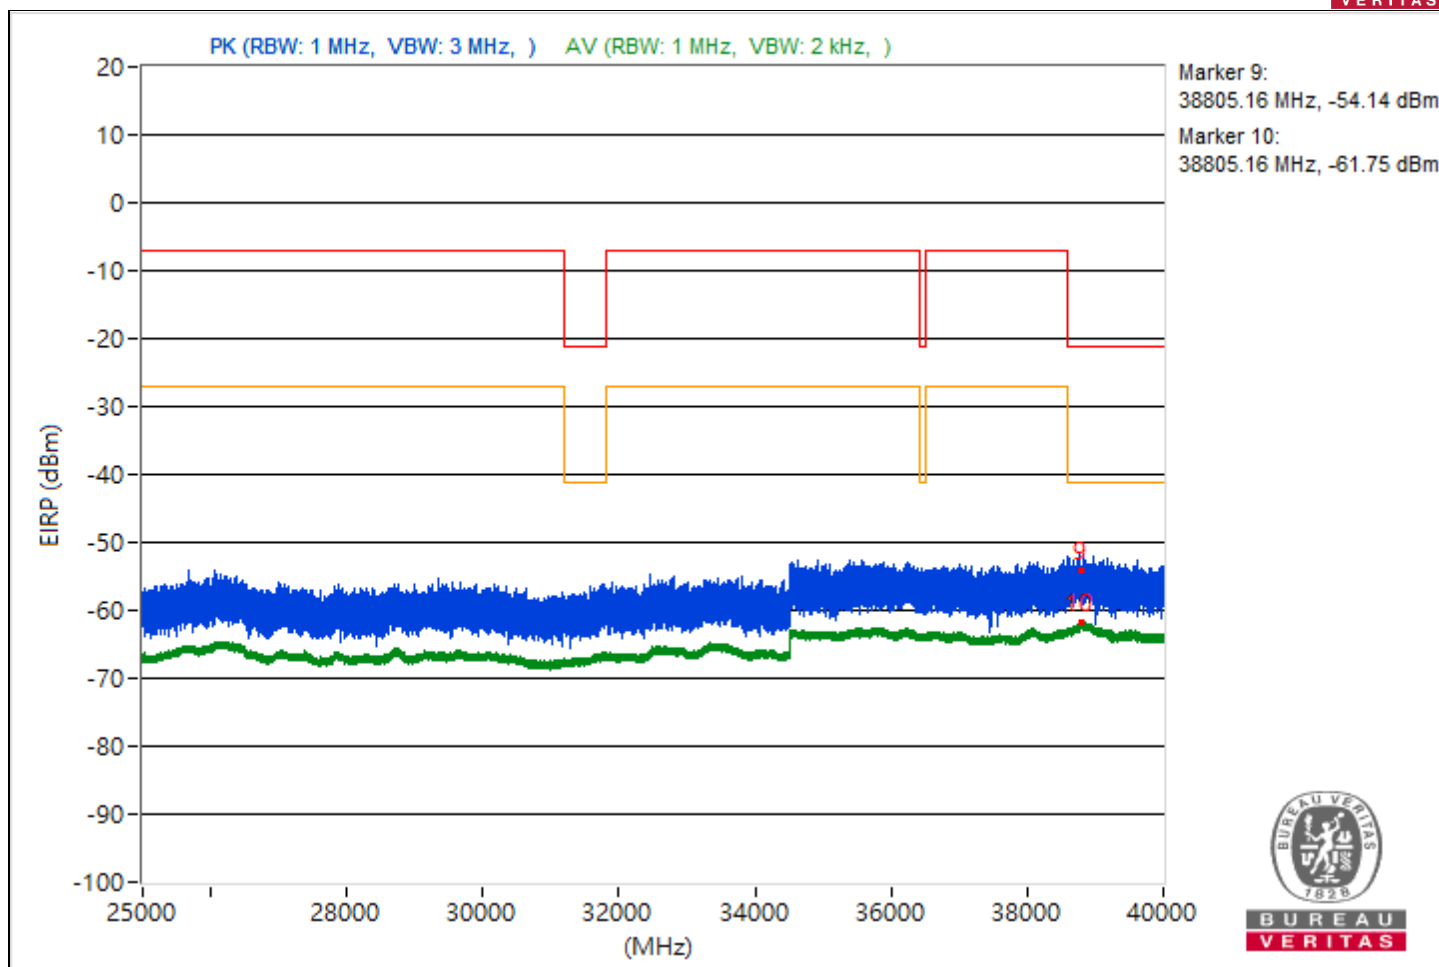


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.97	44.1 PK	74	-29.9	-59.5	-58.71	4.92	-51.16
2	3810.97	37.56 AV	54	-16.44	-65.97	-65.32	4.92	-57.7
3	14478.04	43.84 PK	74	-30.16	-58.82	-59.96	4.92	-51.42
4	14478.04	36.75 AV	54	-17.25	-66.69	-66.21	4.92	-58.51
5	21053.1	47.01 PK	74	-26.99	-59.34	-54.37	4.92	-48.25
6	21053.1	38.41 AV	54	-15.59	-64.33	-65.27	4.92	-56.85
7	22223.4	46.54 PK	74	-27.46	-57.36	-56.04	4.92	-48.72
8	22223.4	39.84 AV	54	-14.16	-63.7	-63.03	4.92	-55.42
9	38828.71	39.6 PK	74	-34.4	-62.67	-64.77	4.92	-55.66
10	38828.71	33.41 AV	54	-20.59	-70.18	-69.41	4.92	-61.85

Note: Margin value = Emission Level - Limit value

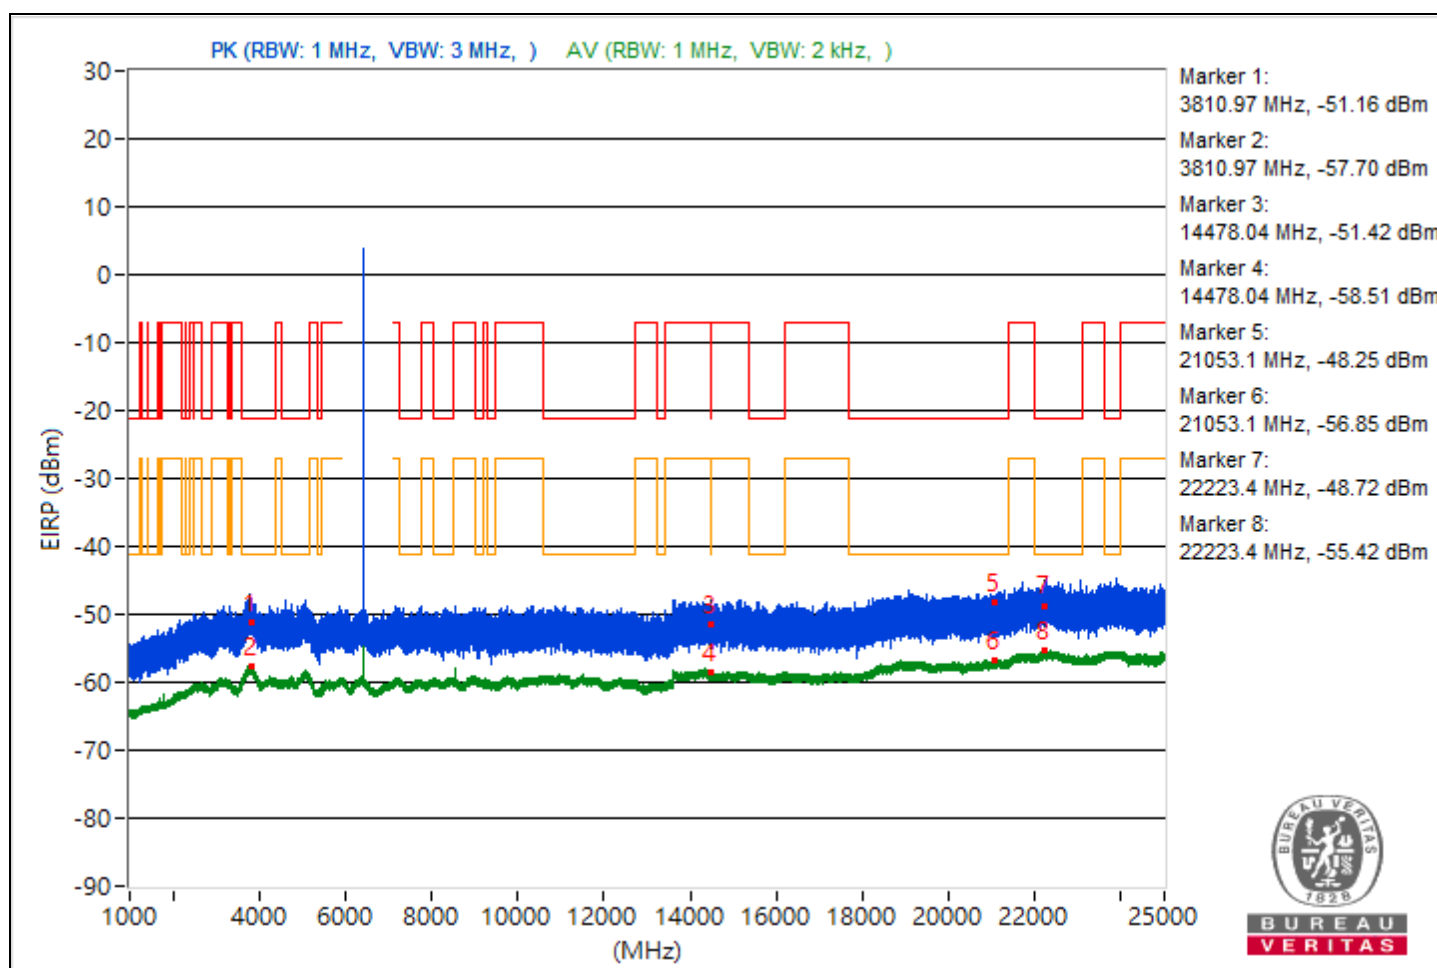


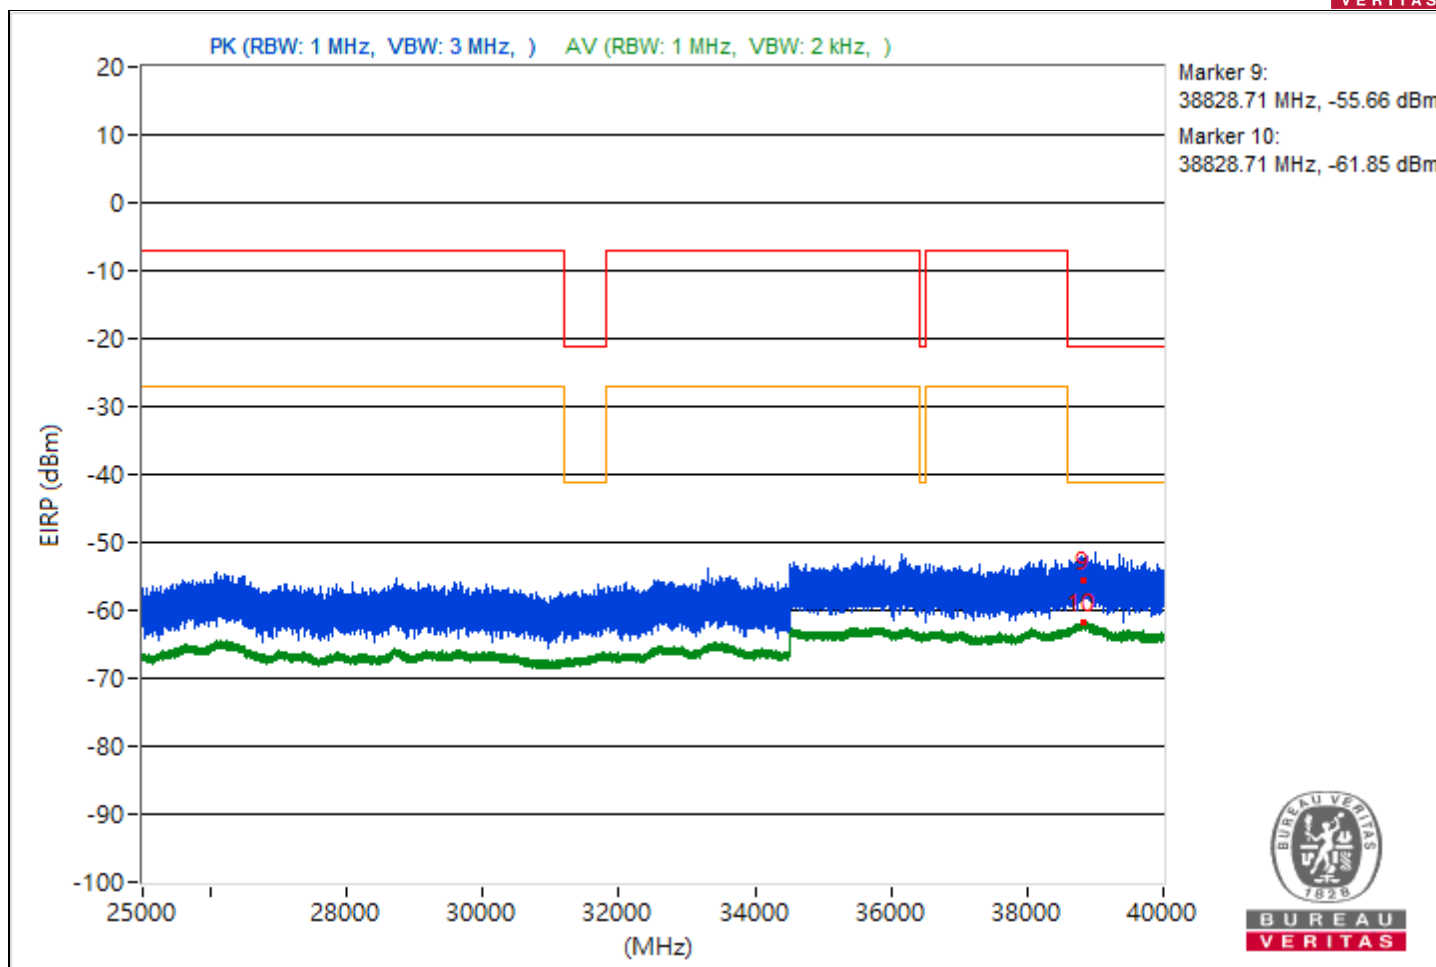


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.32	44.83 PK	74	-29.17	-60.08	-57.13	4.92	-50.43
2	3787.32	37.62 AV	54	-16.38	-65.74	-65.41	4.92	-57.64
3	14478.76	44.61 PK	74	-29.39	-59.16	-58.07	4.92	-50.65
4	14478.76	36.81 AV	54	-17.19	-66.12	-66.65	4.92	-58.45
5	21150.9	43.91 PK	74	-30.09	-60.85	-58.13	4.92	-51.35
6	21150.9	38.63 AV	54	-15.37	-64.43	-64.7	4.92	-56.63
7	23638.8	48.19 PK	74	-25.81	-54.34	-55.78	4.92	-47.07
8	23638.8	39.59 AV	54	-14.41	-64.27	-63.03	4.92	-55.67
9	38848.18	41.29 PK	74	-32.71	-60.5	-63.97	4.92	-53.97
10	38848.18	33.33 AV	54	-20.67	-70.27	-69.49	4.92	-61.93

Note: Margin value = Emission Level - Limit value

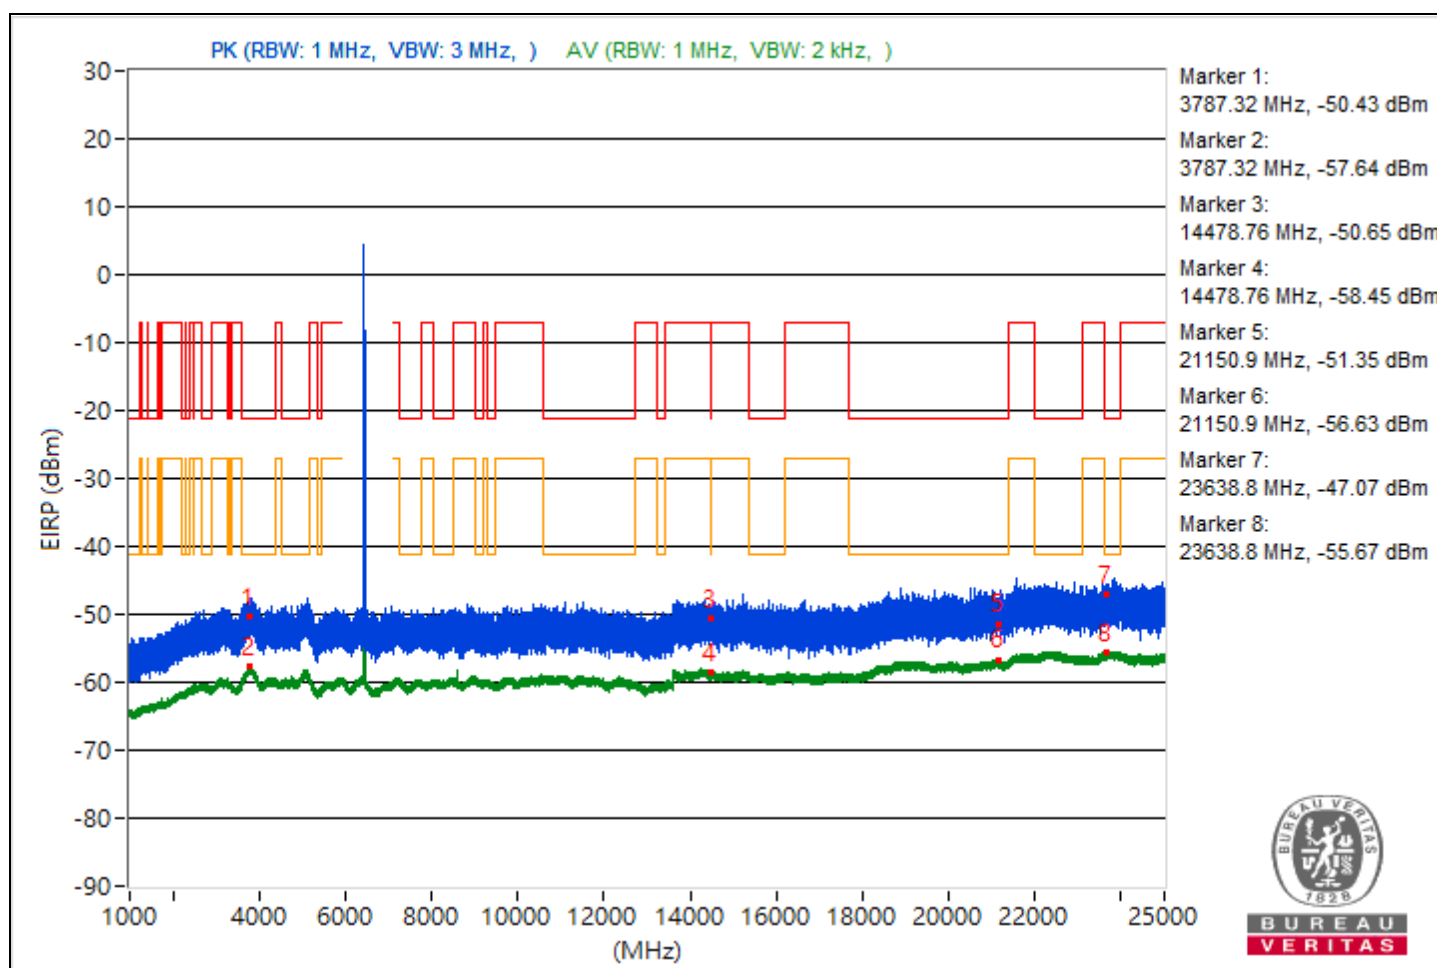


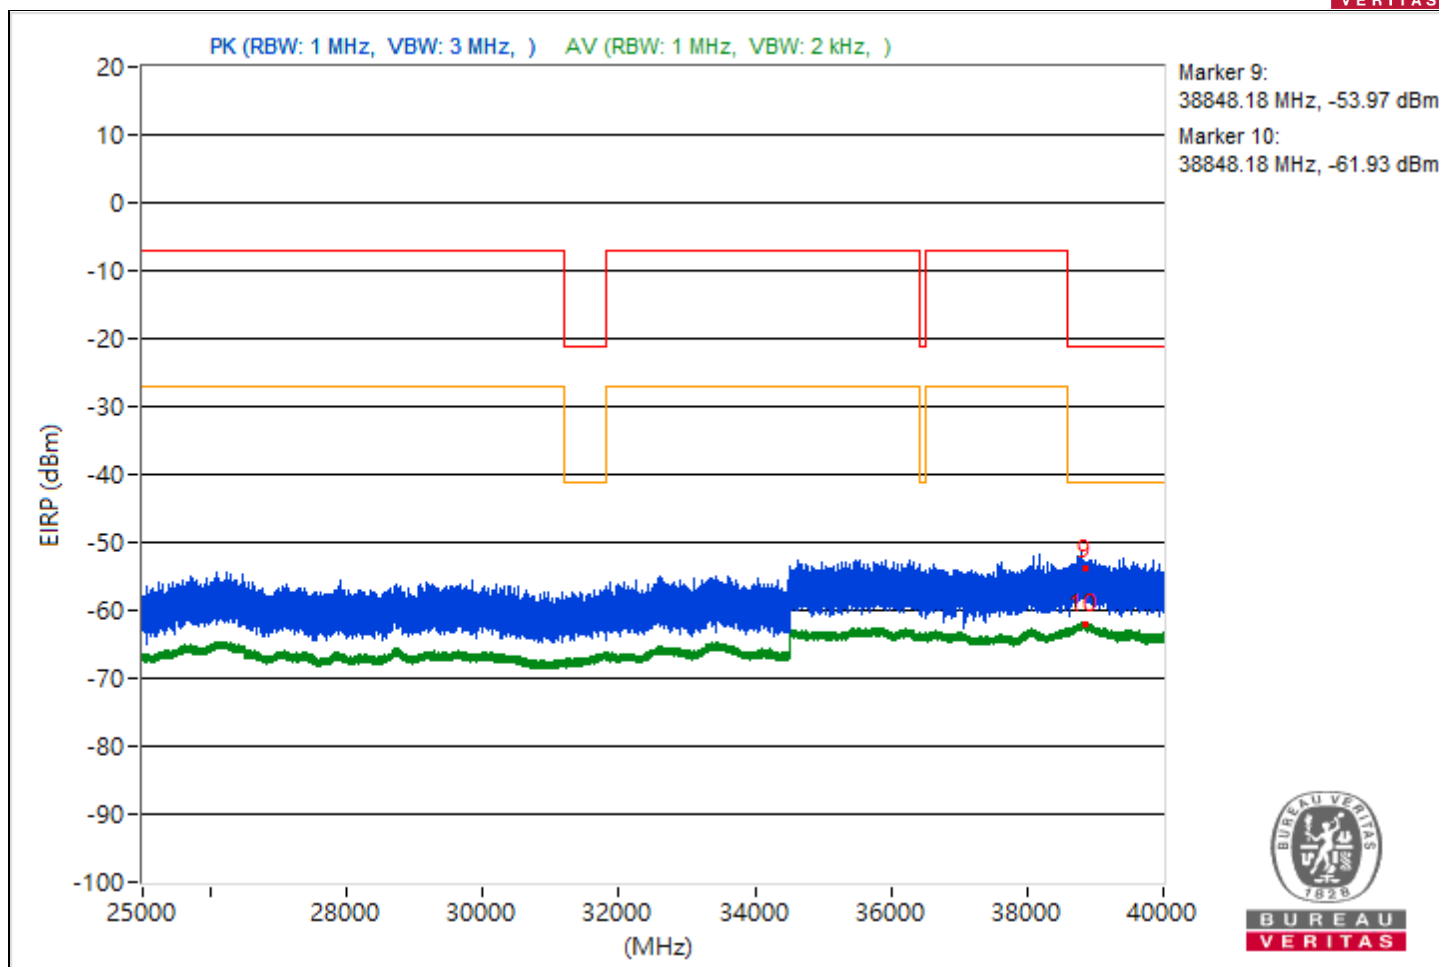


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3830.72	46.32 PK	74	-27.68	-57.71	-56.17	4.92	-48.94
2	3830.72	37.36 AV	54	-16.64	-65.27	-66.48	4.92	-57.9
3	14484.62	43.38 PK	74	-30.62	-59.75	-59.86	4.92	-51.88
4	14484.62	36.65 AV	54	-17.35	-66.95	-66.17	4.92	-58.61
5	21198.1	44.7 PK	74	-29.3	-60.47	-57.13	4.92	-50.56
6	21198.1	38.39 AV	54	-15.61	-65.28	-64.38	4.92	-56.87
7	23927.6	45.64 PK	74	-28.36	-58.77	-56.6	4.92	-49.62
8	23927.6	39.73 AV	54	-14.27	-63.03	-63.95	4.92	-55.53
9	38861.24	39.69 PK	74	-34.31	-65.06	-62.35	4.92	-55.57
10	38861.24	33.44 AV	54	-20.56	-69.19	-70.39	4.92	-61.82

Note: Margin value = Emission Level - Limit value

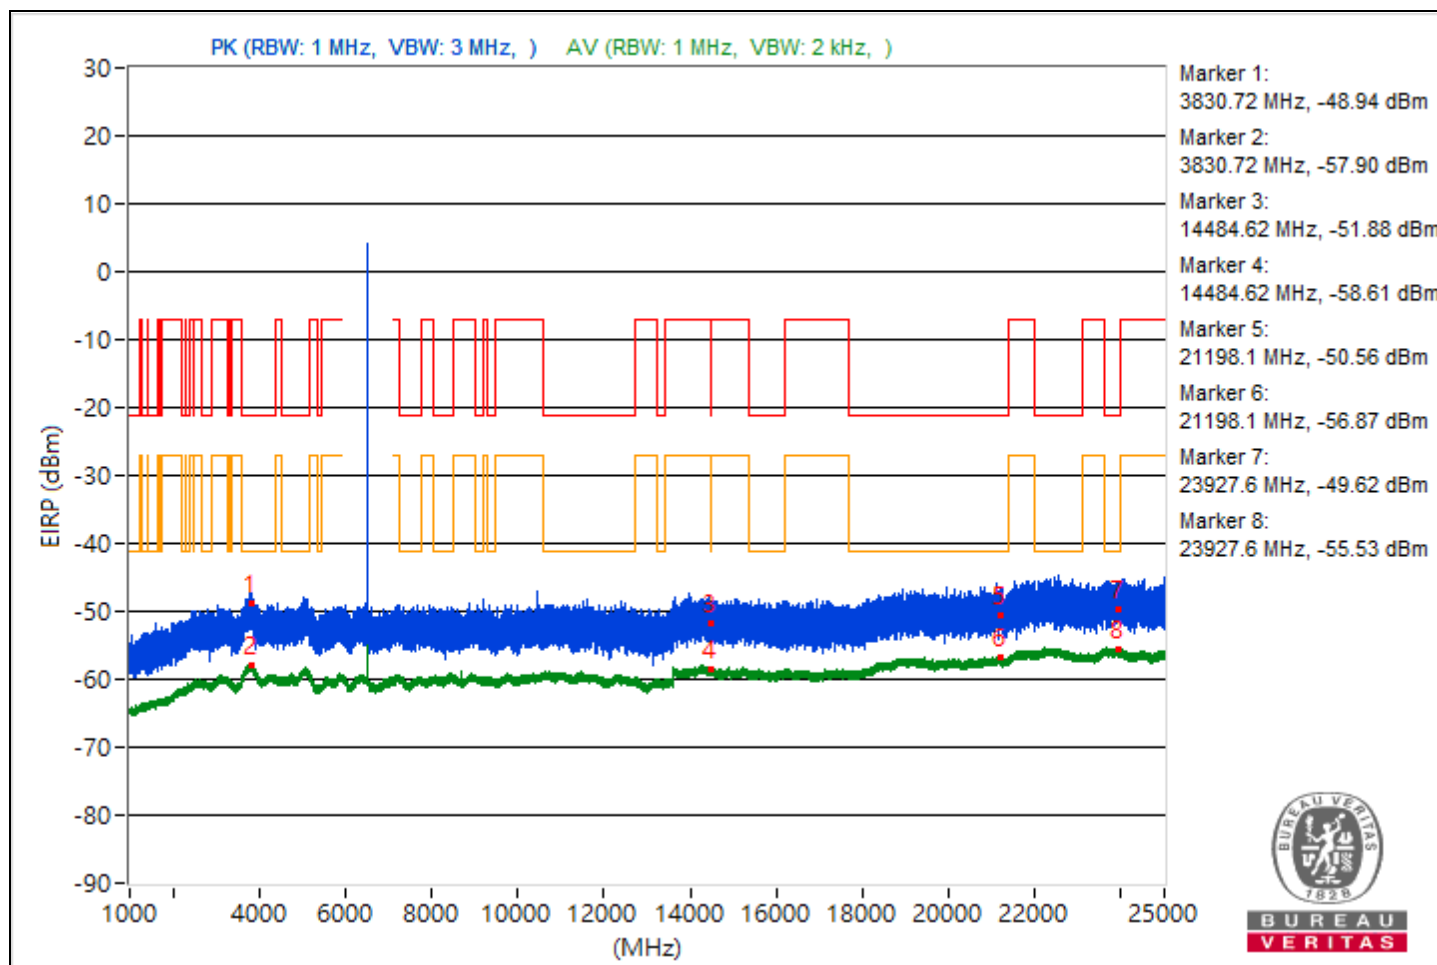


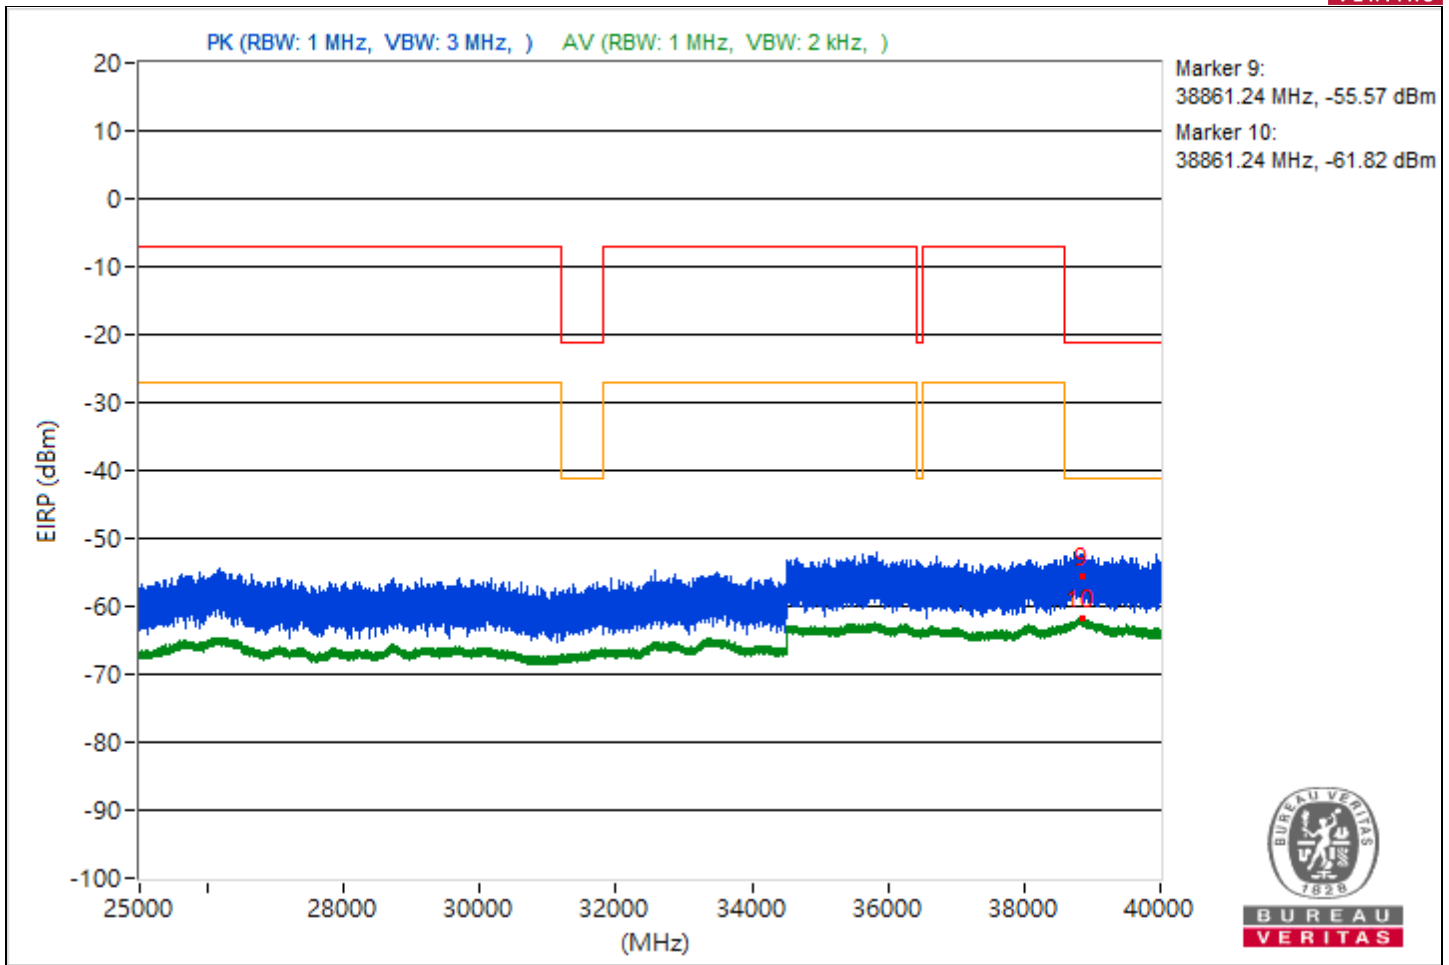


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.31	44.79 PK	74	-29.21	-58.72	-58.1	4.92	-50.47
2	3807.31	37.49 AV	54	-16.51	-66.16	-65.29	4.92	-57.77
3	15585.24	41.86 PK	74	-32.14	-60.73	-62.02	4.92	-53.4
4	15585.24	36.48 AV	54	-17.52	-67.3	-66.2	4.92	-58.78
5	21179.7	45.61 PK	74	-28.39	-57.81	-57.37	4.92	-49.65
6	21179.7	38.51 AV	54	-15.49	-64.35	-65.04	4.92	-56.75
7	22271.9	45.8 PK	74	-28.2	-57.93	-56.92	4.92	-49.46
8	22271.9	39.75 AV	54	-14.25	-63.9	-63.01	4.92	-55.51
9	38848.27	40.66 PK	74	-33.34	-63.7	-61.62	4.92	-54.6
10	38848.27	33.48 AV	54	-20.52	-69.82	-69.61	4.92	-61.78

Note: Margin value = Emission Level - Limit value

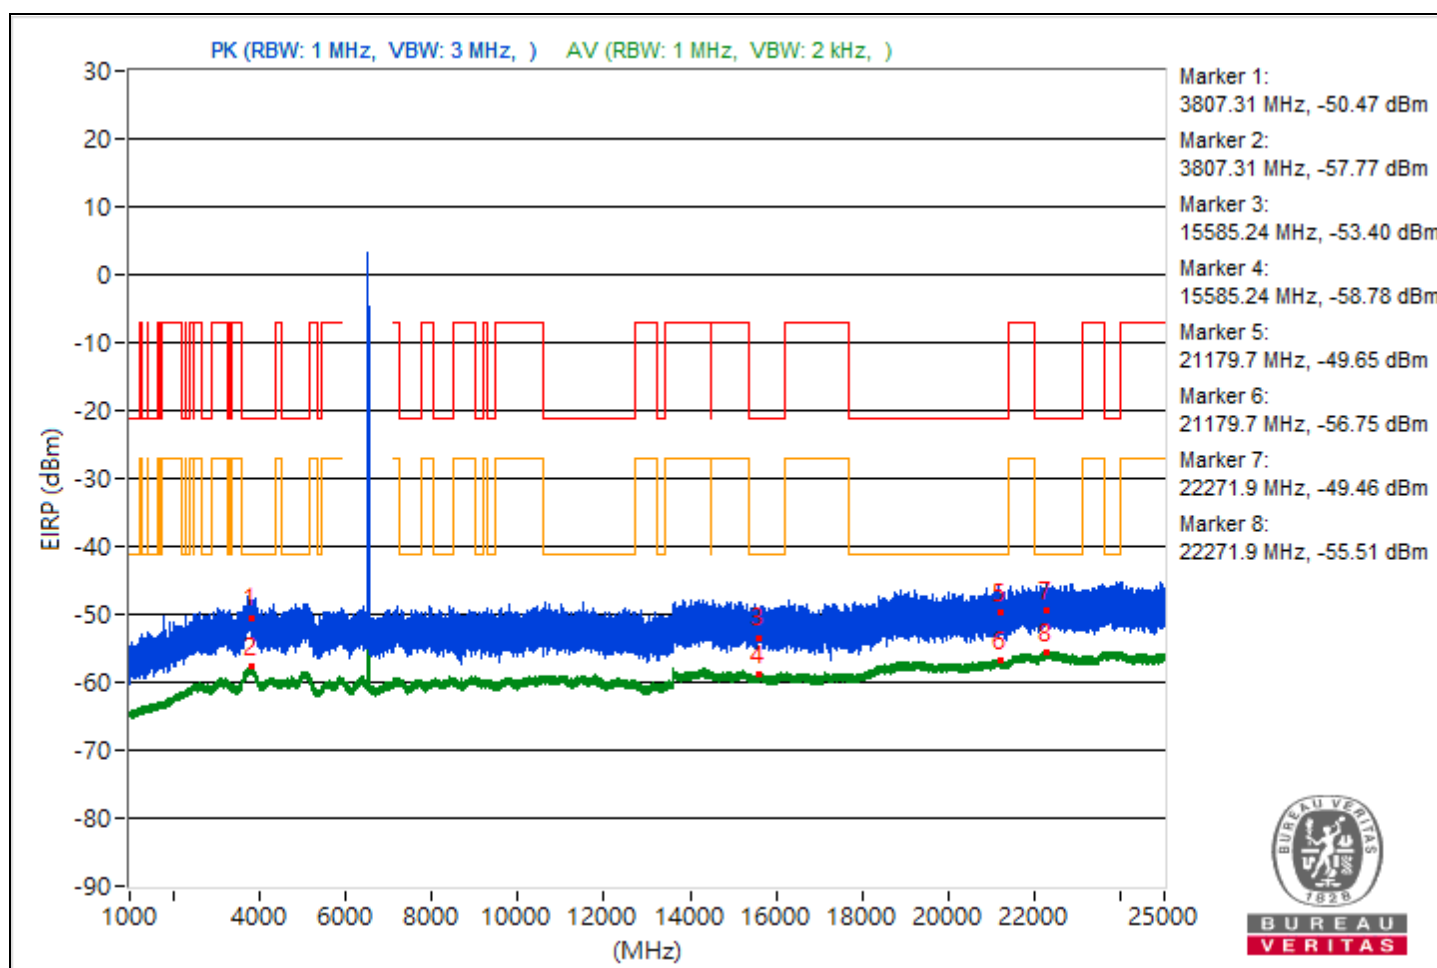


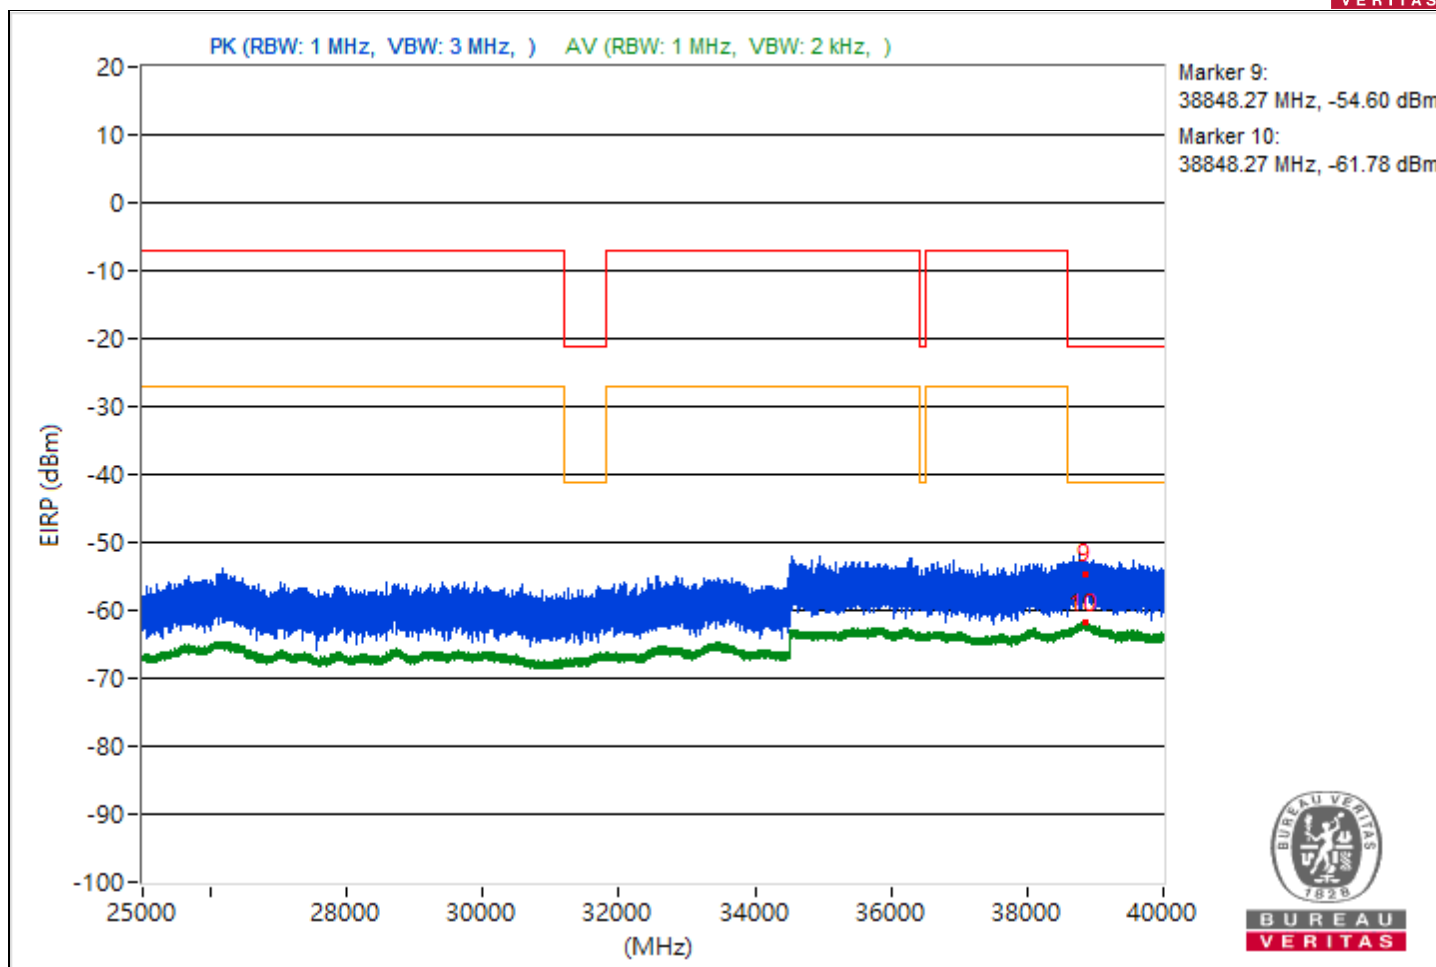


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.82	44.25 PK	74	-29.75	-58.79	-59.09	4.92	-51.01
2	3825.82	37.48 AV	54	-16.52	-66.07	-65.39	4.92	-57.78
3	9139.82	43.93 PK	74	-30.07	-58.68	-59.94	4.92	-51.33
4	9139.82	36.92 AV	54	-17.08	-65	-68.07	4.92	-58.34
5	21118	44.06 PK	74	-29.94	-58.5	-59.88	4.92	-51.2
6	21118	38.39 AV	54	-15.61	-64.48	-65.15	4.92	-56.87
7	23770.5	45.65 PK	74	-28.35	-57.13	-58	4.92	-49.61
8	23770.5	39.76 AV	54	-14.24	-63.91	-63.01	4.92	-55.5
9	38857.69	39.56 PK	74	-34.44	-63.07	-64.27	4.92	-55.7
10	38857.69	33.52 AV	54	-20.48	-69.99	-69.37	4.92	-61.74

Note: Margin value = Emission Level - Limit value

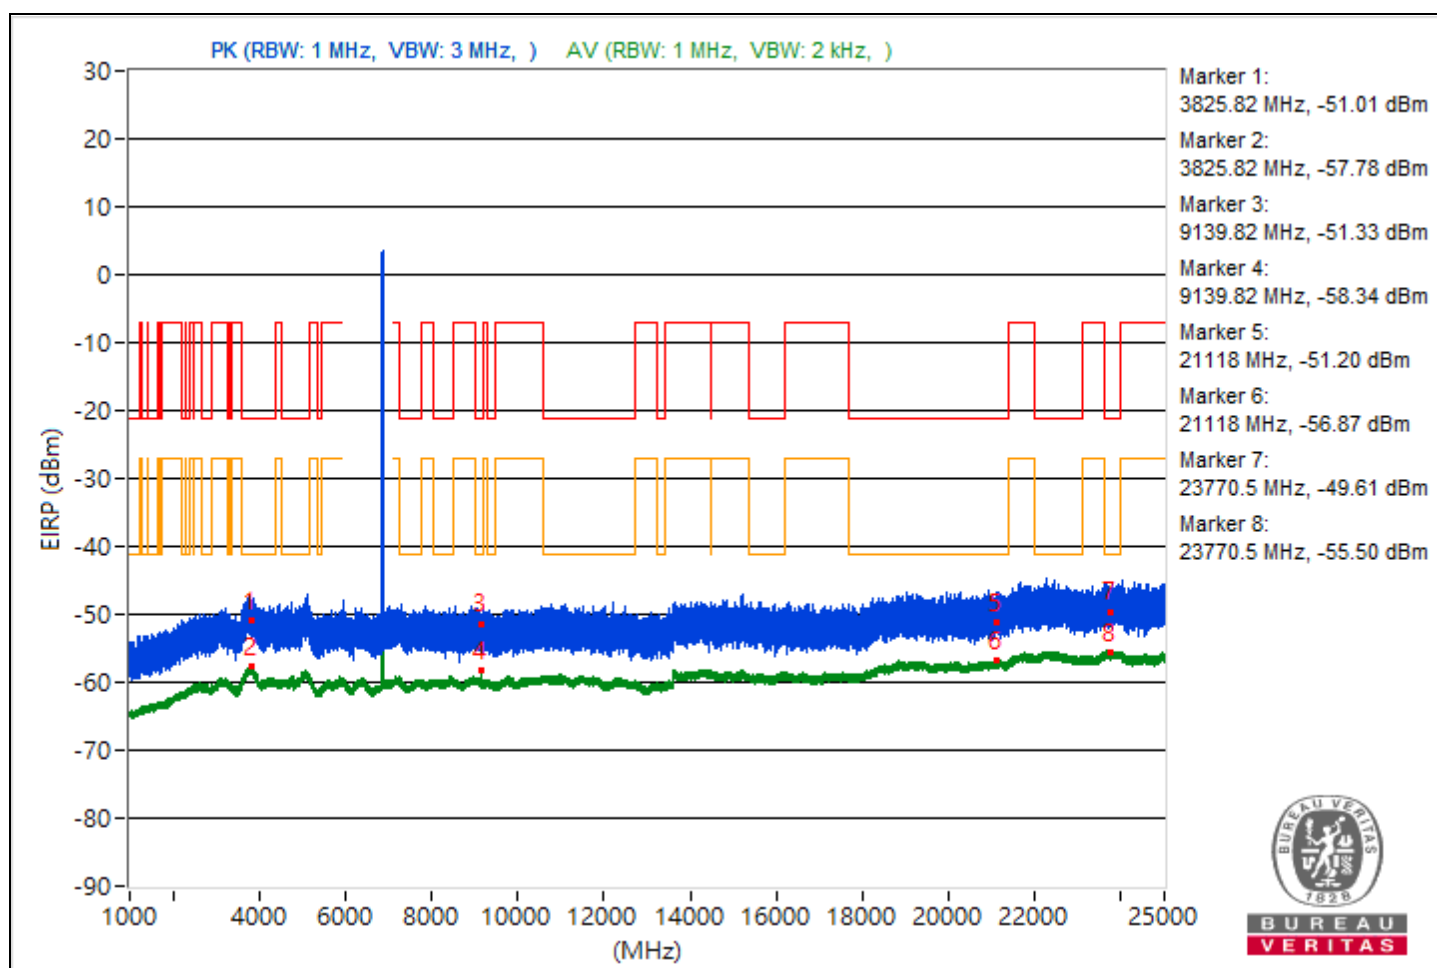


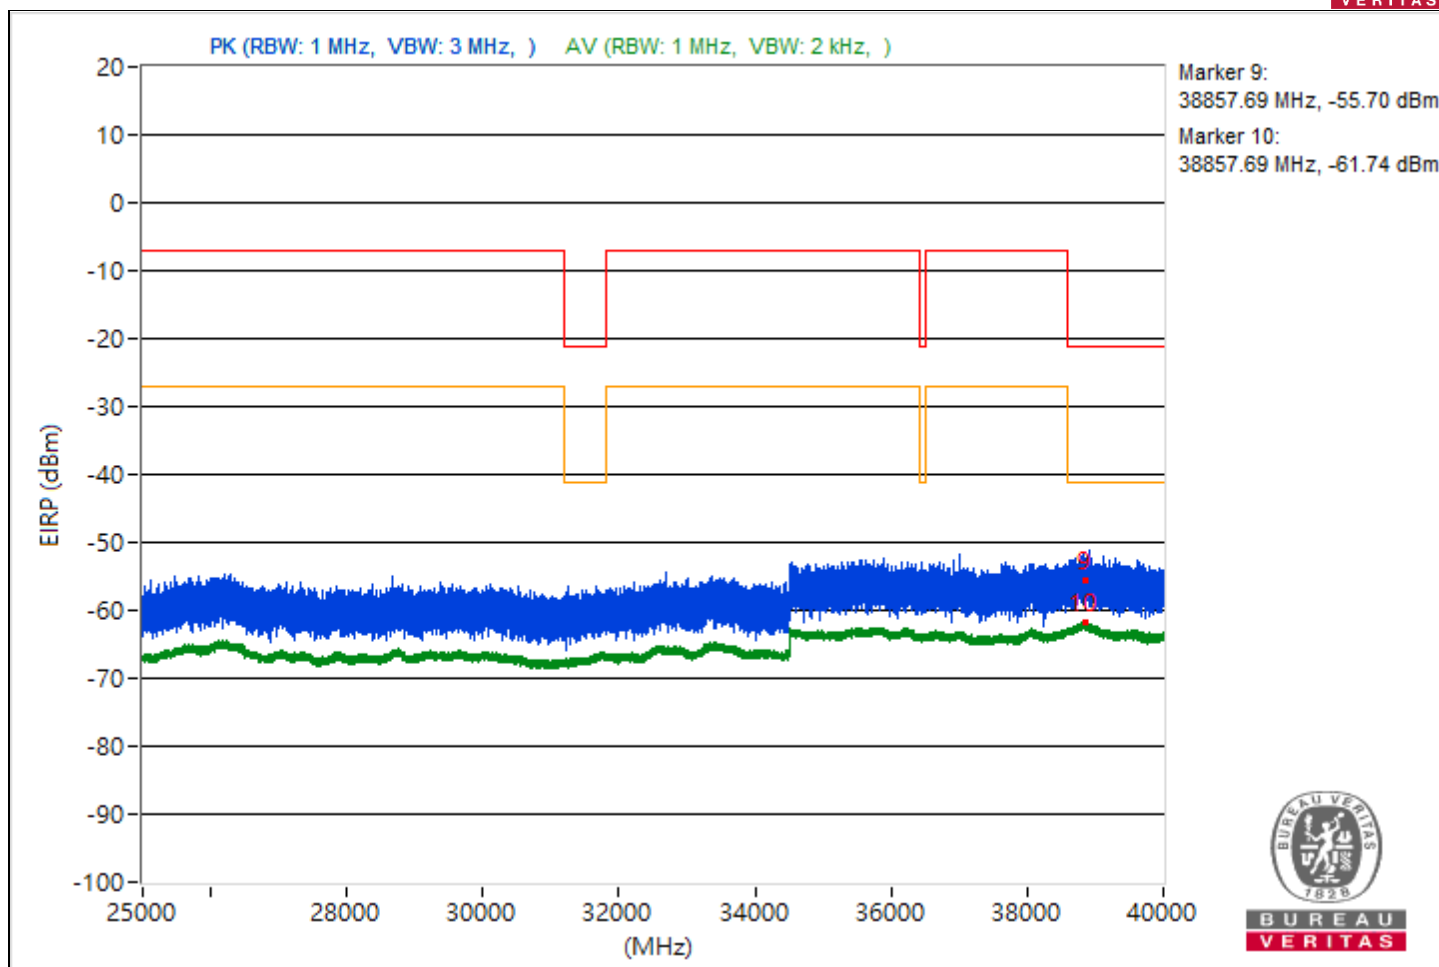


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.01	45.58 PK	74	-28.42	-57.56	-57.65	4.92	-49.68
2	3787.01	37.55 AV	54	-16.45	-65.89	-65.4	4.92	-57.71
3	14479.47	44.64 PK	74	-29.36	-57.94	-59.27	4.92	-50.62
4	14479.47	37.11 AV	54	-16.89	-66.01	-66.16	4.92	-58.15
5	19343.2	45.46 PK	74	-28.54	-56.48	-59.5	4.92	-49.8
6	19343.2	38.35 AV	54	-15.65	-65.3	-64.42	4.92	-56.91
7	23978	46.15 PK	74	-27.85	-59.16	-55.62	4.92	-49.11
8	23978	39.68 AV	54	-14.32	-64.08	-63.01	4.92	-55.58
9	38871.64	40.95 PK	74	-33.05	-64.89	-60.61	4.92	-54.31
10	38871.64	33.65 AV	54	-20.35	-69.76	-69.33	4.92	-61.61

Note: Margin value = Emission Level - Limit value

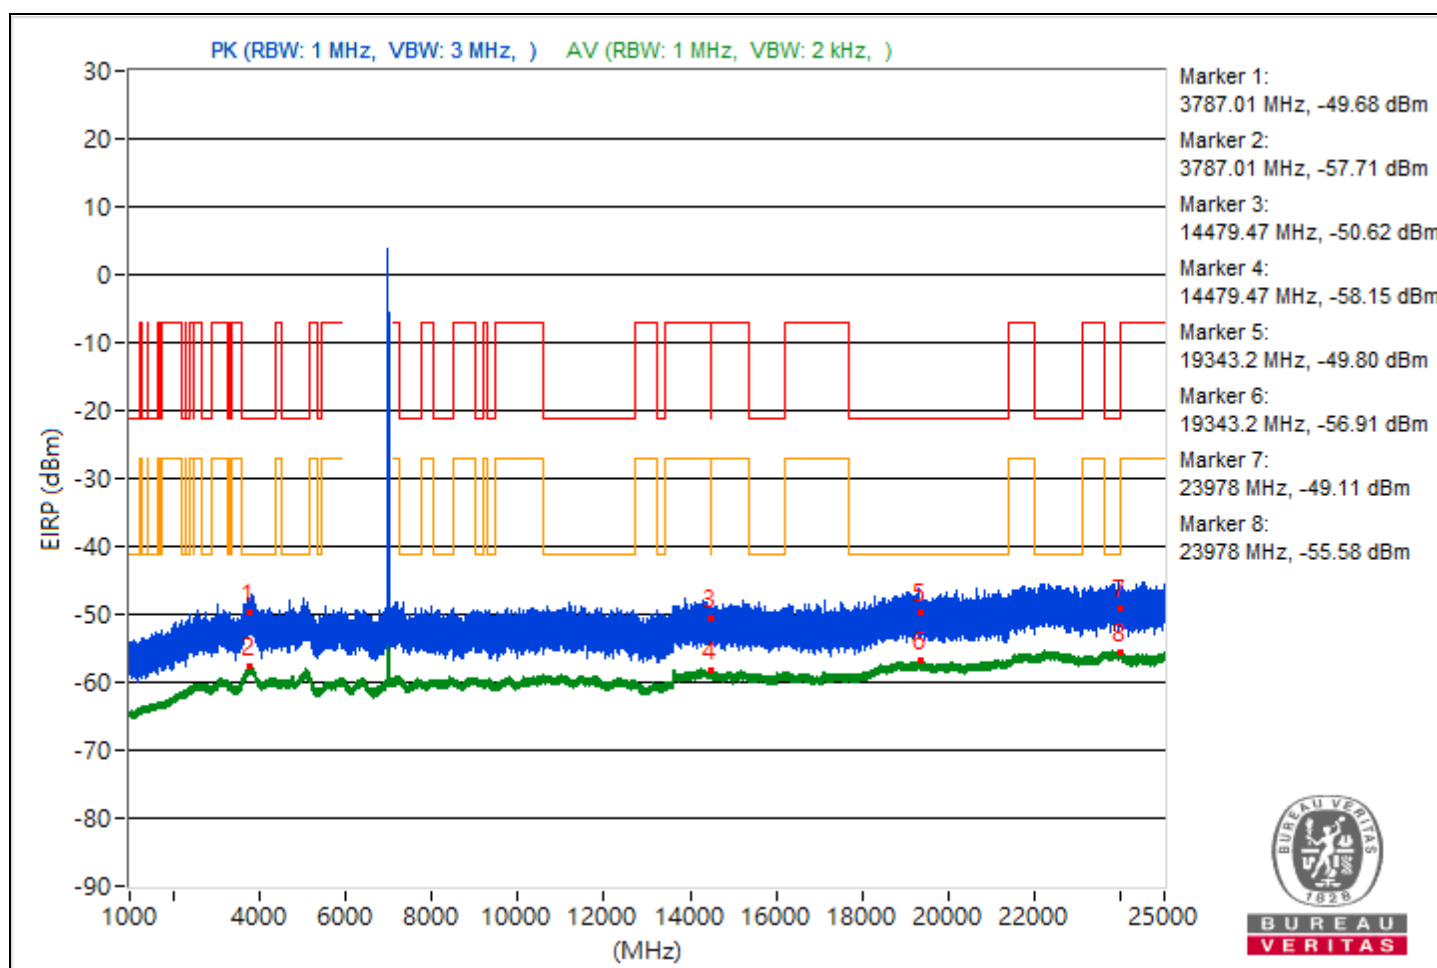


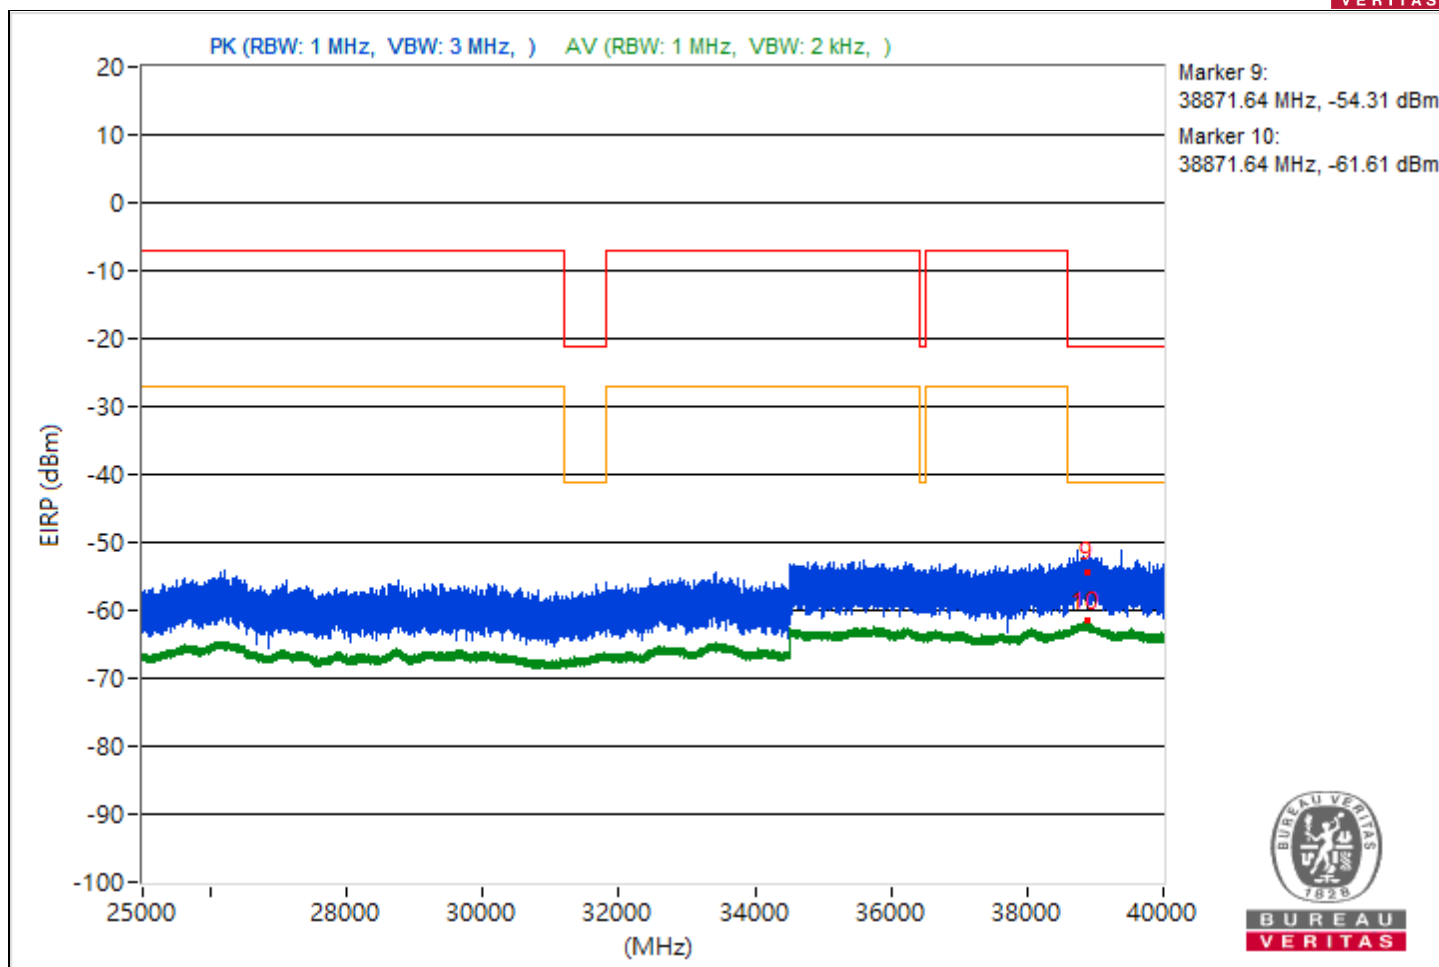


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.42	44.23 PK	74	-29.77	-59.83	-58.23	4.92	-51.03
2	3796.42	37.52 AV	54	-16.48	-66.07	-65.31	4.92	-57.74
3	14481.6	43.48 PK	74	-30.52	-60.4	-59.12	4.92	-51.78
4	14481.6	36.69 AV	54	-17.31	-65.89	-67.22	4.92	-58.57
5	21380.1	44.79 PK	74	-29.21	-60.02	-57.23	4.92	-50.47
6	21380.1	38.49 AV	54	-15.51	-64.98	-64.43	4.92	-56.77
7	22194.3	45.44 PK	74	-28.56	-57.19	-58.4	4.92	-49.82
8	22194.3	39.63 AV	54	-14.37	-64.11	-63.08	4.92	-55.63
9	38853.24	40.07 PK	74	-33.93	-62.32	-64.1	4.92	-55.19
10	38853.24	33.56 AV	54	-20.44	-69.83	-69.44	4.92	-61.7

Note: Margin value = Emission Level - Limit value

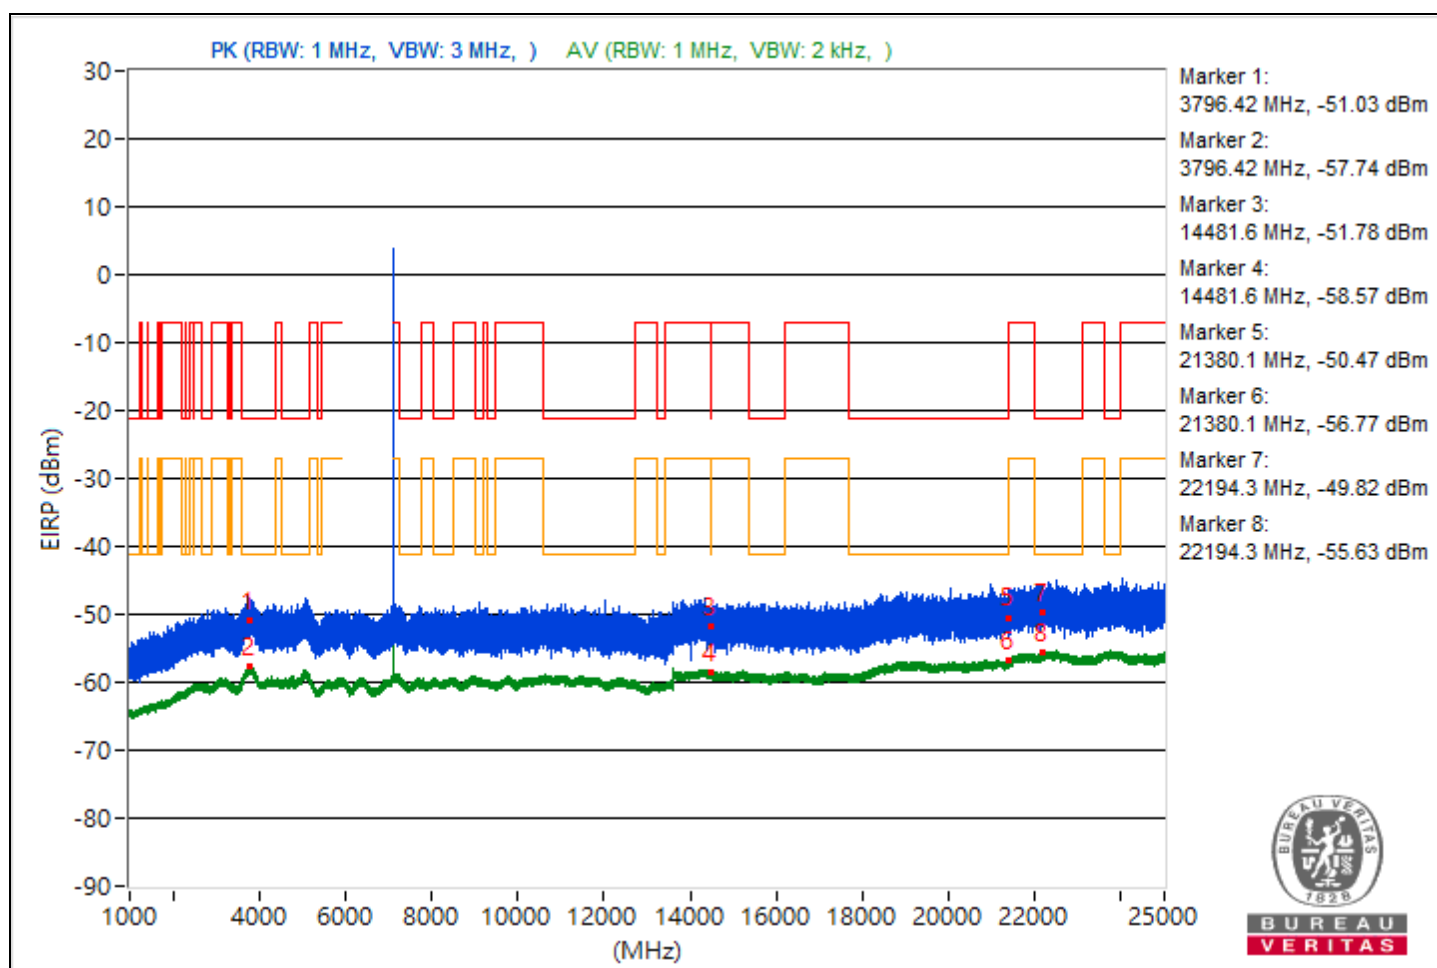


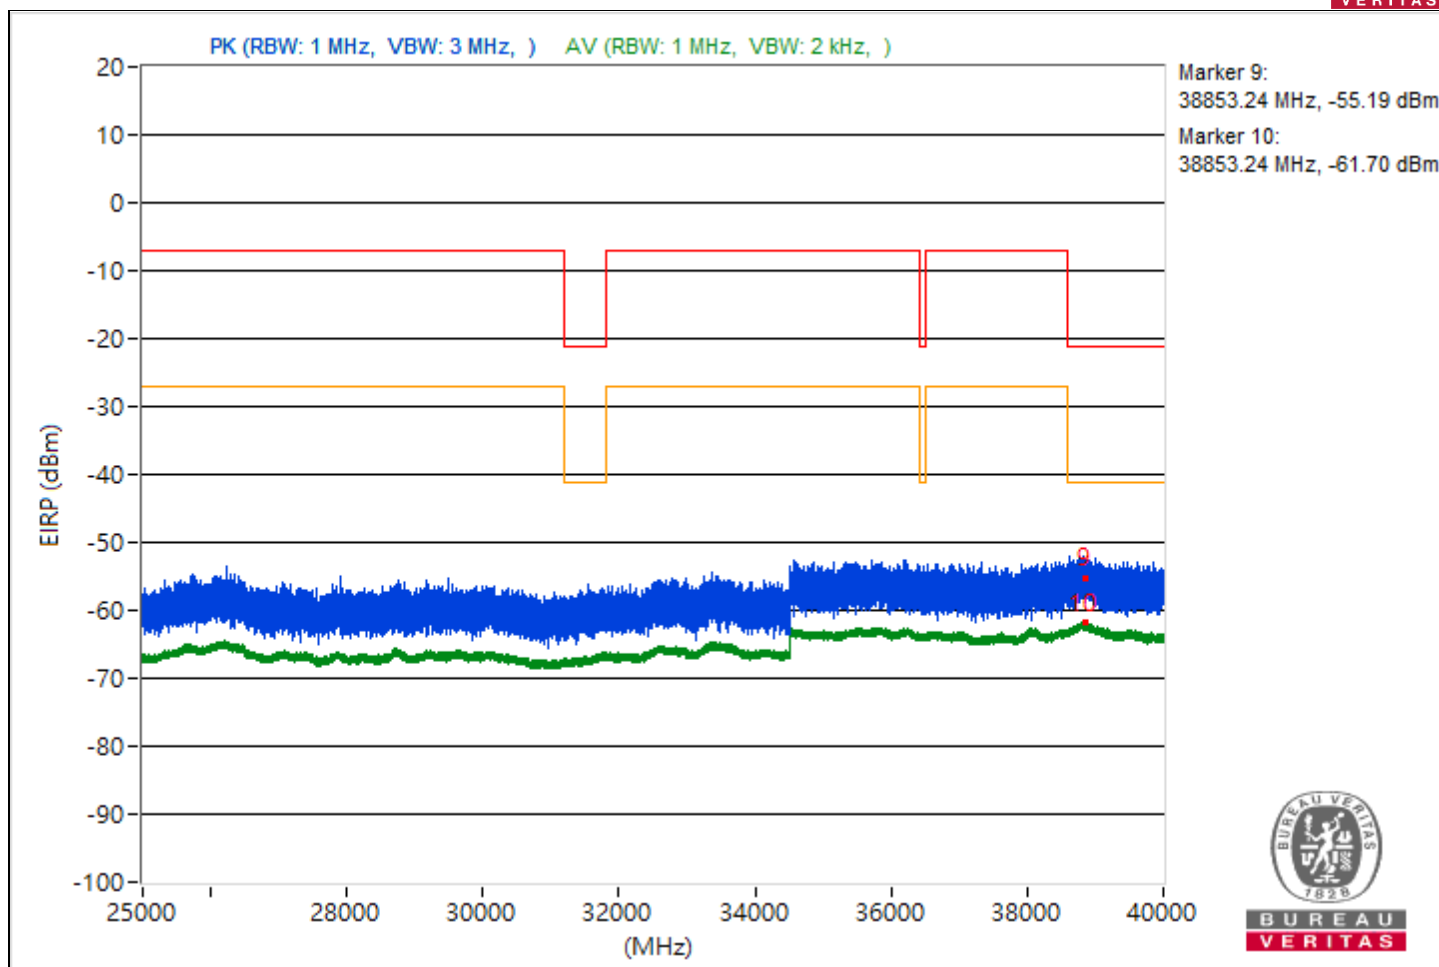


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.83	43.68 PK	74	-30.32	-59.81	-59.24	4.92	-51.58
2	3791.83	37.43 AV	54	-16.57	-65.33	-66.23	4.92	-57.83
3	14471.38	42.51 PK	74	-31.49	-61.42	-60.04	4.92	-52.75
4	14471.38	36.95 AV	54	-17.05	-65.83	-66.7	4.92	-58.31
5	21095.3	45.55 PK	74	-28.45	-58.28	-57.09	4.92	-49.71
6	21095.3	38.33 AV	54	-15.67	-64.39	-65.39	4.92	-56.93
7	23783.3	45.98 PK	74	-28.02	-57.26	-57.17	4.92	-49.28
8	23783.3	39.68 AV	54	-14.32	-62.94	-64.16	4.92	-55.58
9	38797.87	40.09 PK	74	-33.91	-63.63	-62.63	4.92	-55.17
10	38797.87	33.5 AV	54	-20.5	-70.05	-69.37	4.92	-61.76

Note: Margin value = Emission Level - Limit value

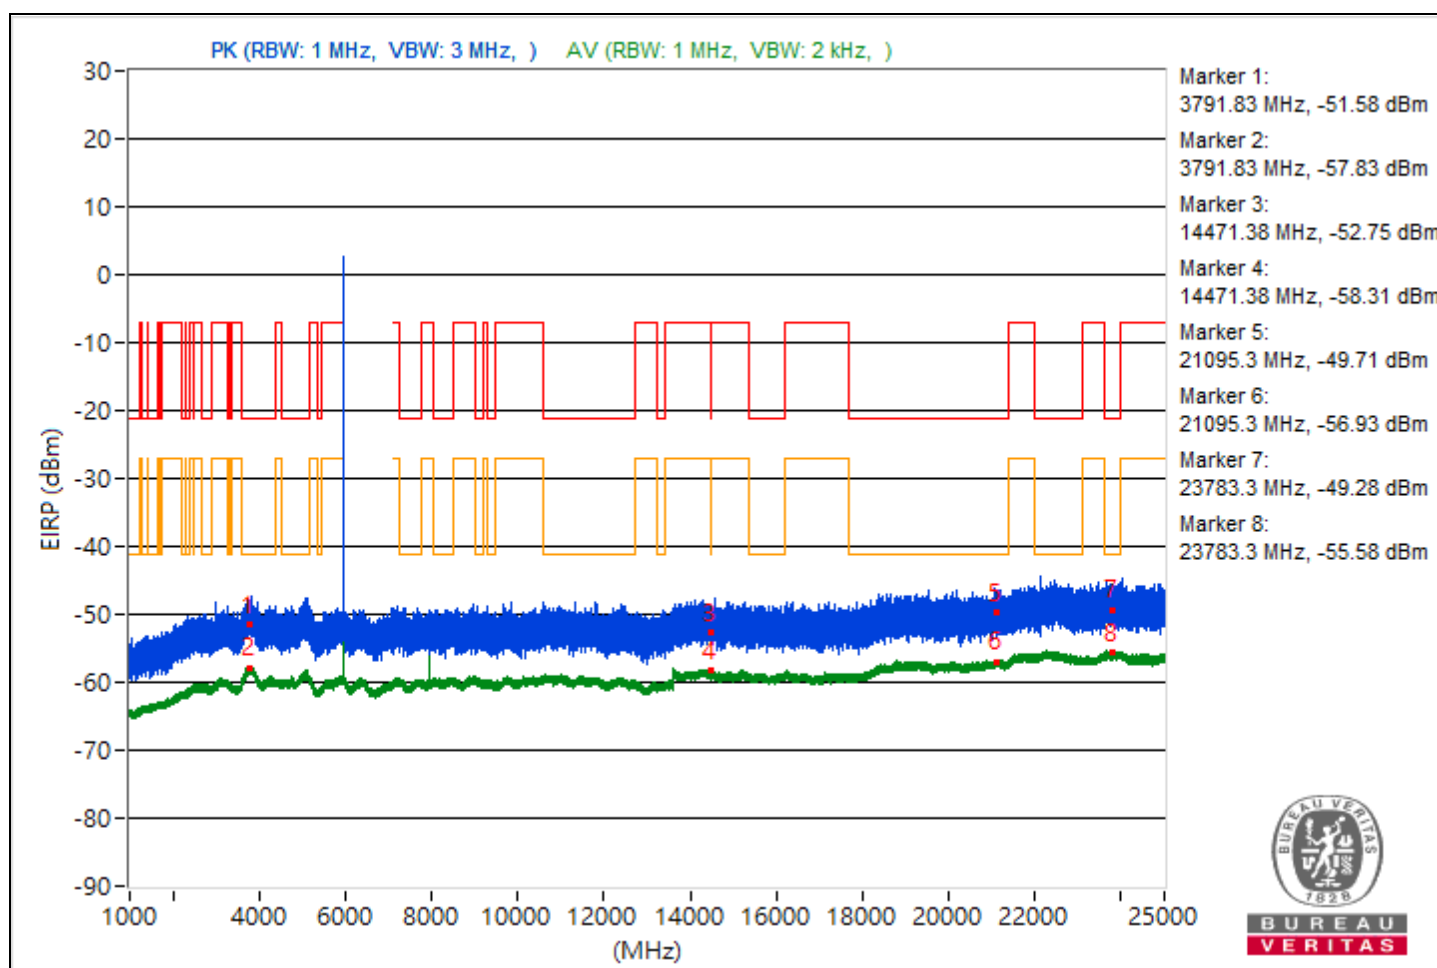


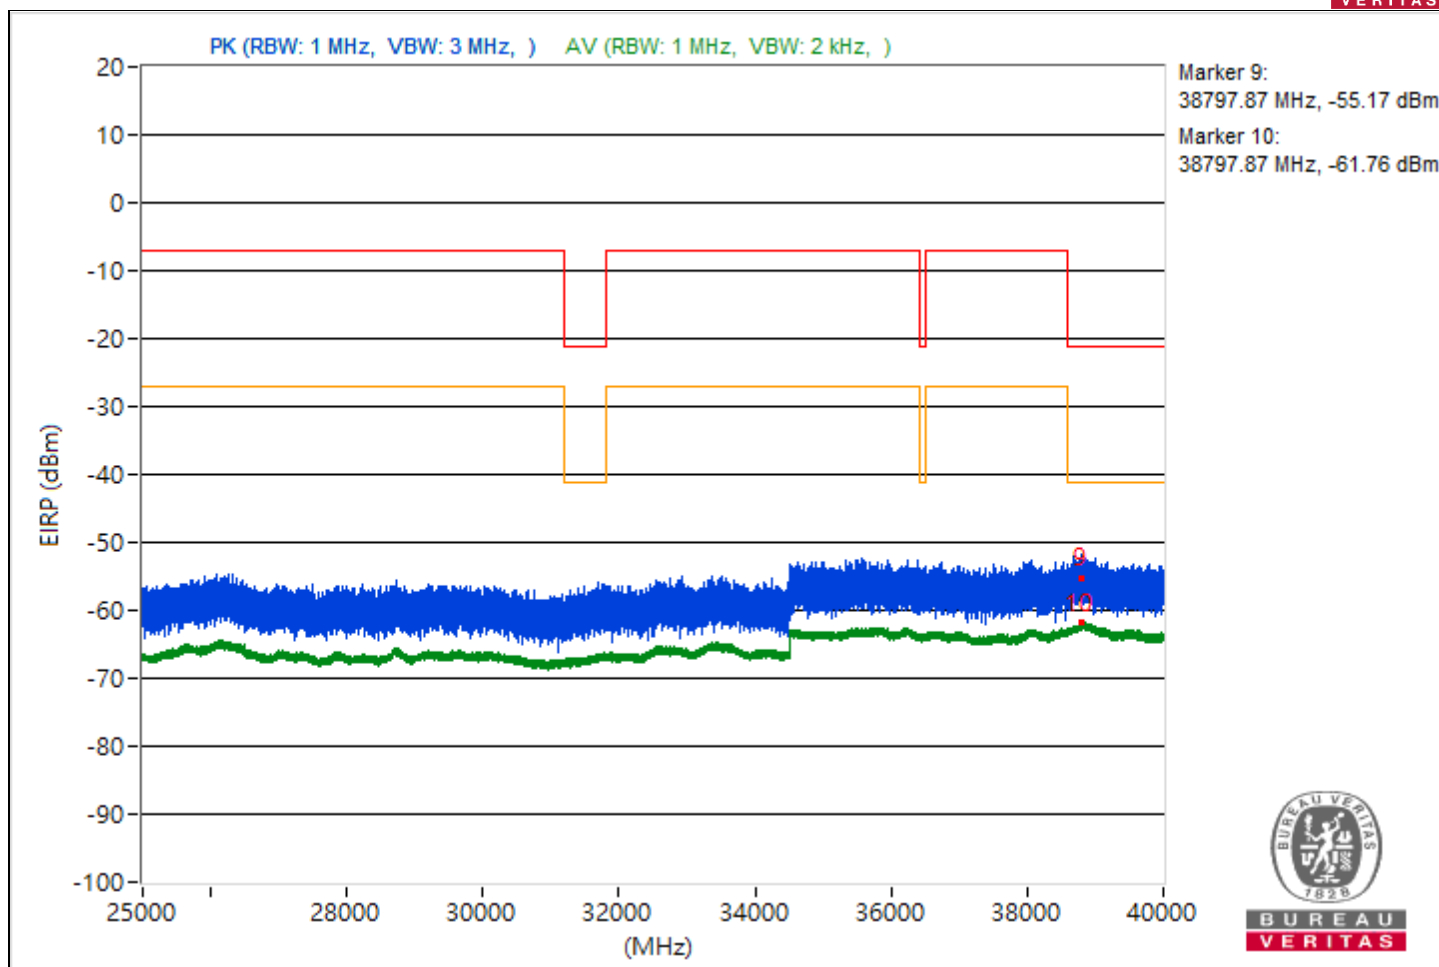


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.22	43.75 PK	74	-30.25	-60.14	-58.84	4.92	-51.51
2	3820.22	37.23 AV	54	-16.77	-65.43	-66.56	4.92	-58.03
3	14493.07	44.1 PK	74	-29.9	-58.33	-60	4.92	-51.16
4	14493.07	36.97 AV	54	-17.03	-65.99	-66.46	4.92	-58.29
5	21366	45.72 PK	74	-28.28	-56.27	-59.12	4.92	-49.54
6	21366	38.58 AV	54	-15.42	-65.37	-63.97	4.92	-56.68
7	23755.3	46.36 PK	74	-27.64	-57.78	-56.06	4.92	-48.9
8	23755.3	39.89 AV	54	-14.11	-62.98	-63.65	4.92	-55.37
9	38838.49	40.95 PK	74	-33.05	-62.27	-62.2	4.92	-54.31
10	38838.49	33.35 AV	54	-20.65	-70.13	-69.57	4.92	-61.91

Note: Margin value = Emission Level - Limit value

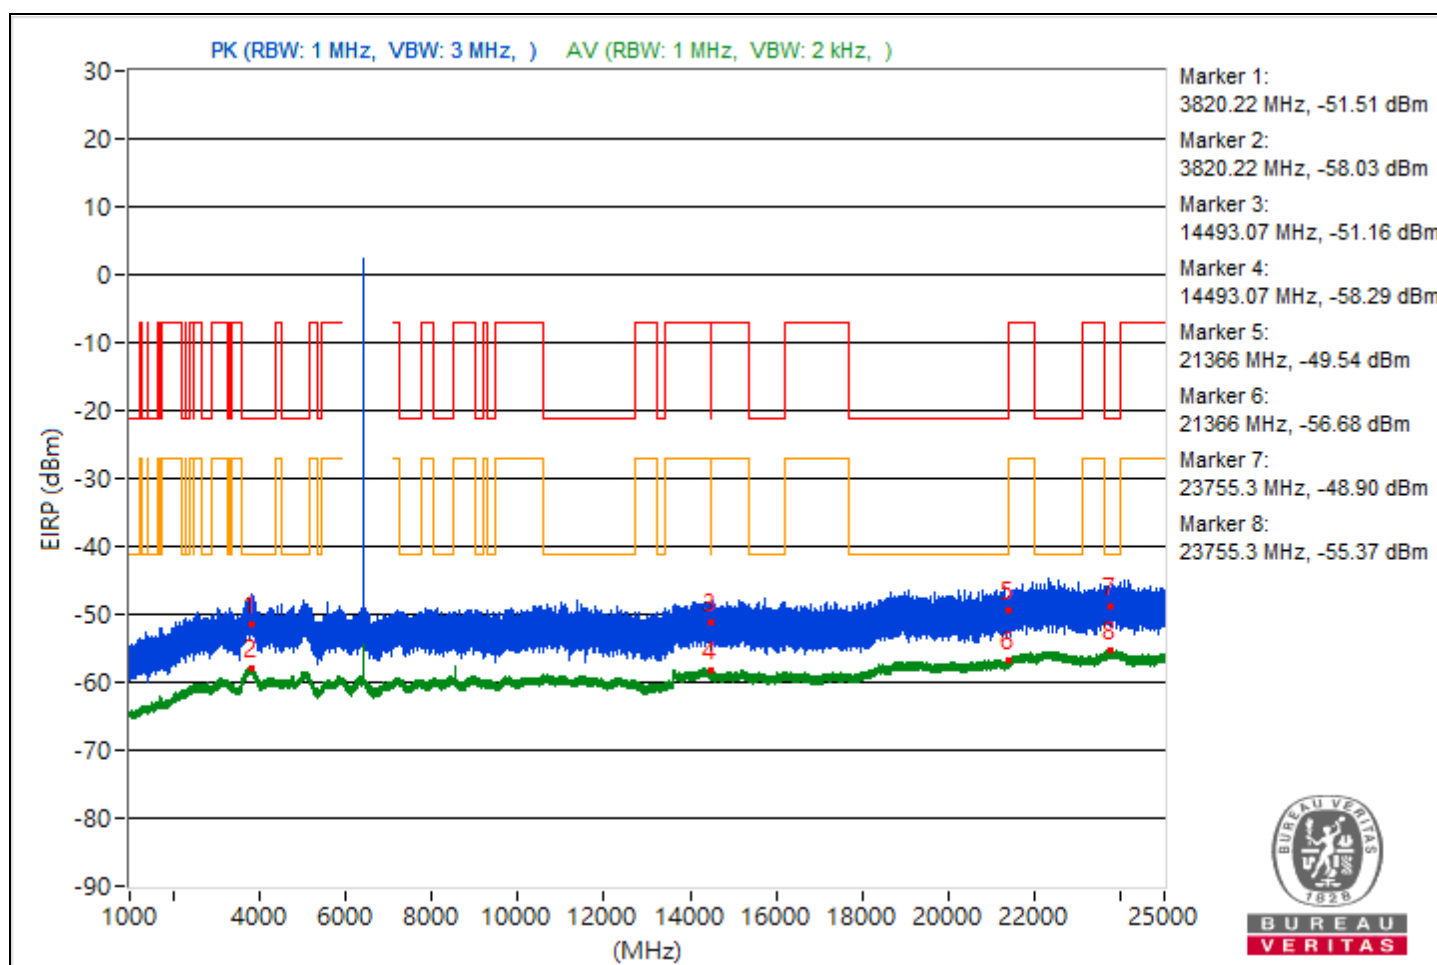


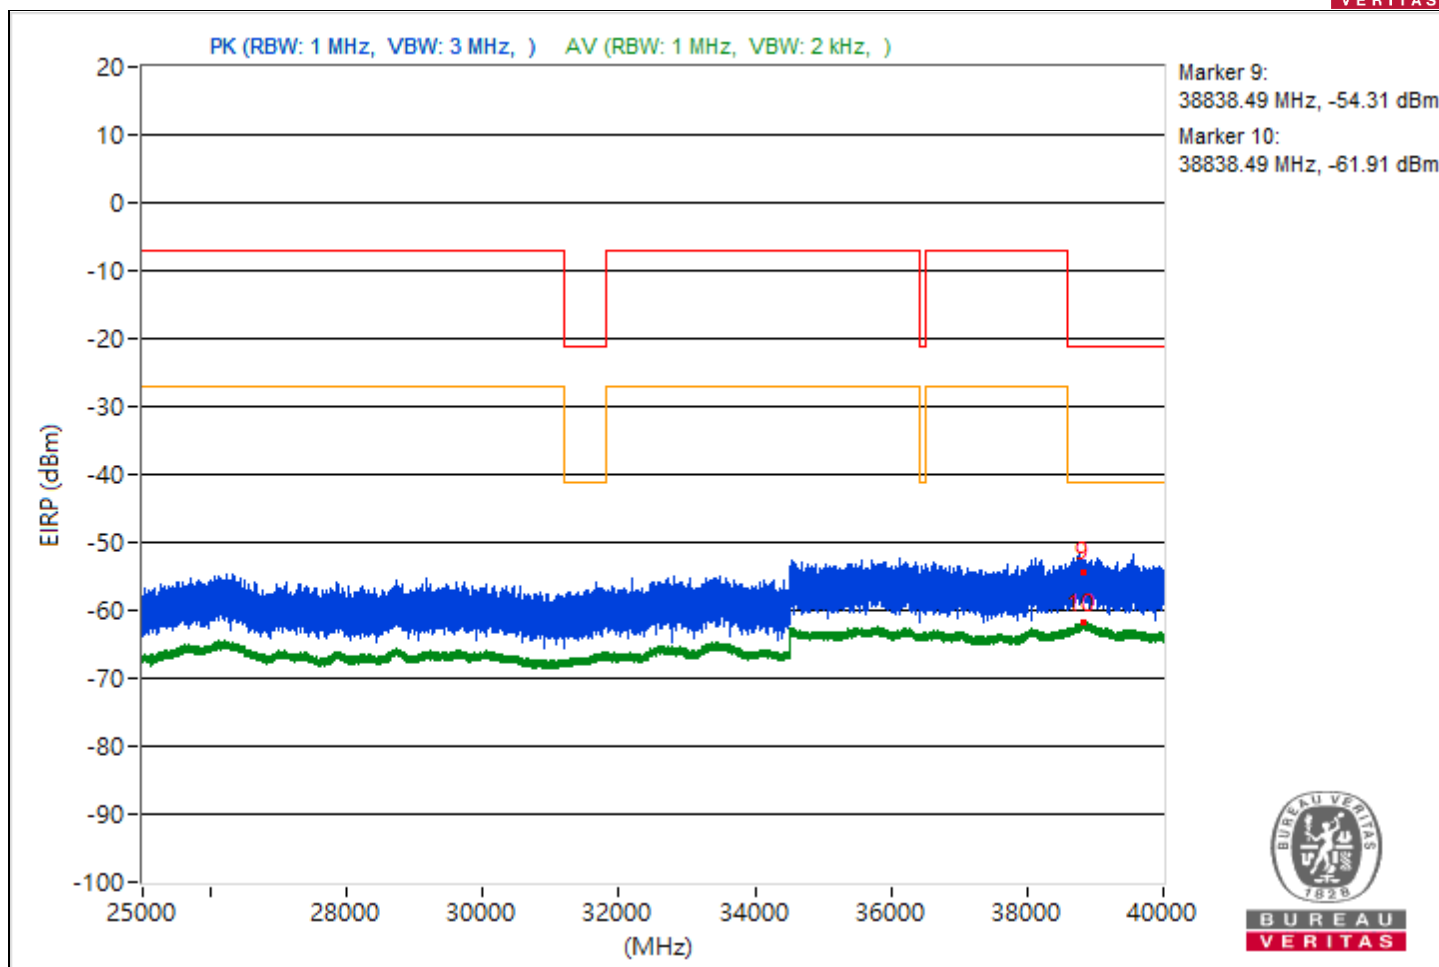


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.27	46.34 PK	74	-27.66	-56.68	-57.03	4.92	-48.92
2	3789.27	37.37 AV	54	-16.63	-66.33	-65.36	4.92	-57.89
3	14486.31	43.26 PK	74	-30.74	-60.58	-59.37	4.92	-52
4	14486.31	36.72 AV	54	-17.28	-66.08	-66.91	4.92	-58.54
5	18789.1	45.95 PK	74	-28.05	-56.22	-58.57	4.92	-49.31
6	18789.1	38.35 AV	54	-15.65	-64.33	-65.43	4.92	-56.91
7	22326.4	46.6 PK	74	-27.4	-56.6	-56.59	4.92	-48.66
8	22326.4	39.75 AV	54	-14.25	-64.12	-62.85	4.92	-55.51
9	38845.78	41.51 PK	74	-32.49	-61.26	-62.14	4.92	-53.75
10	38845.78	33.49 AV	54	-20.51	-69.42	-70	4.92	-61.77

Note: Margin value = Emission Level - Limit value

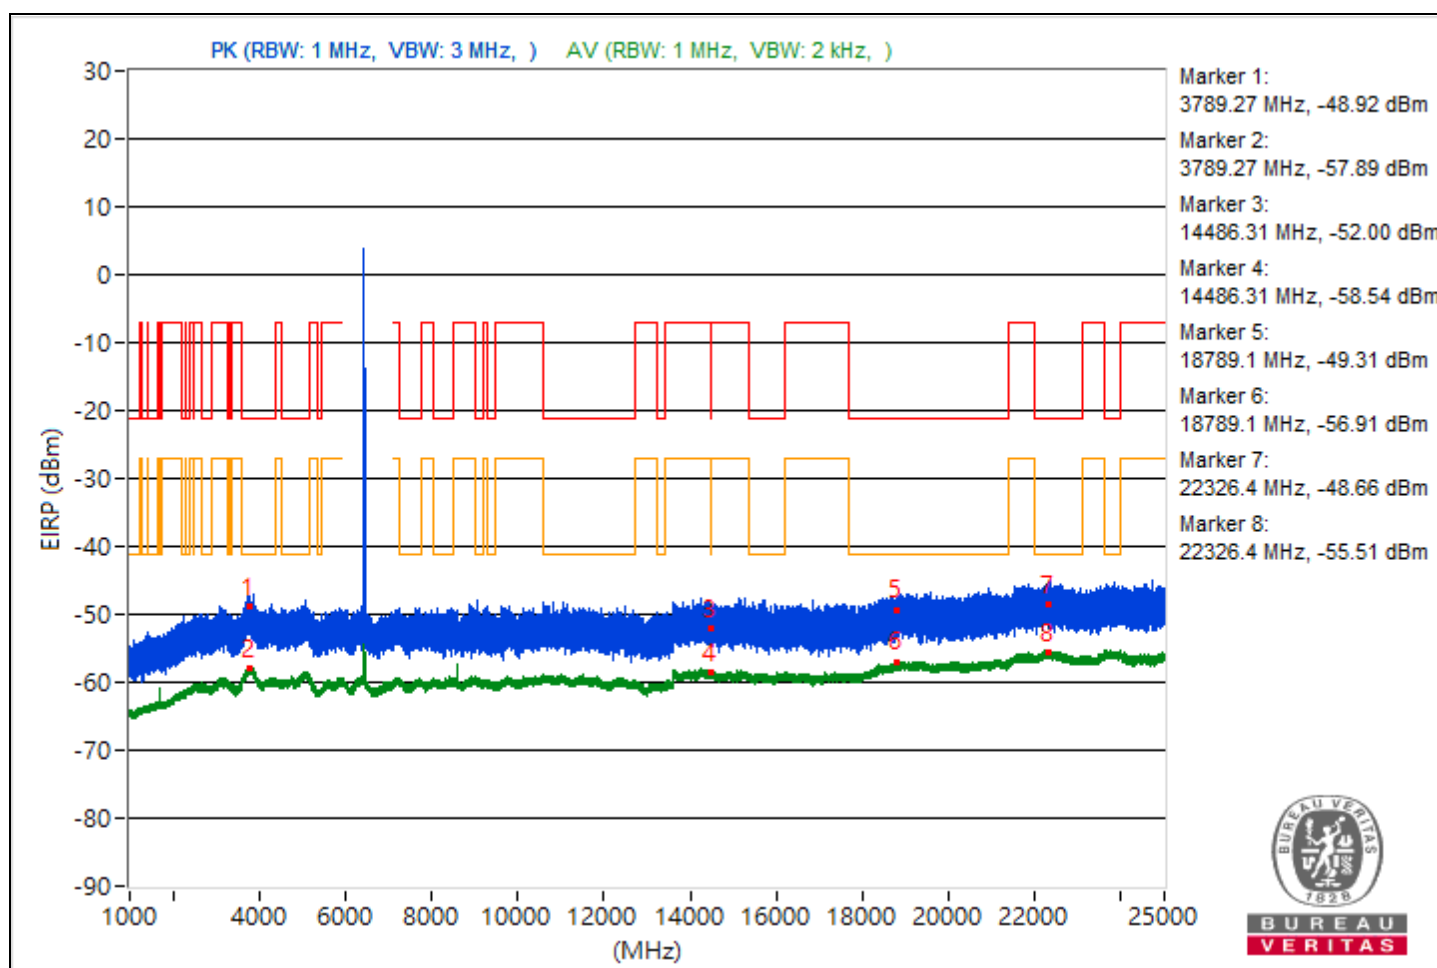


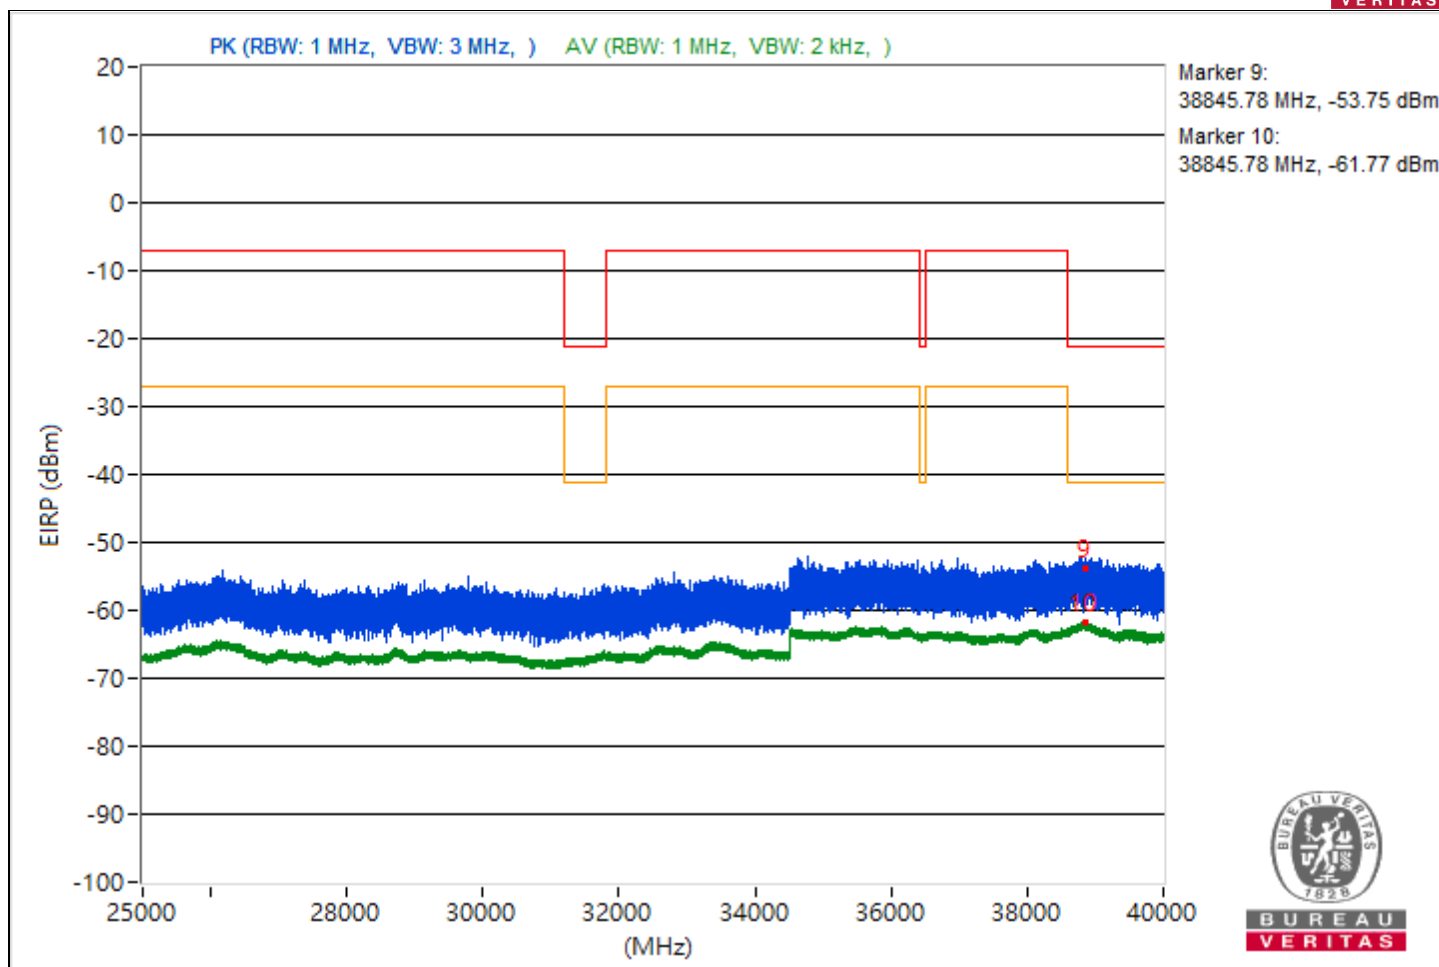


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.84	47.04 PK	74	-26.96	-55.72	-56.62	4.92	-48.22
2	3820.84	37.59 AV	54	-16.41	-65.84	-65.37	4.92	-57.67
3	14490.93	42.96 PK	74	-31.04	-60.32	-60.13	4.92	-52.3
4	14490.93	36.72 AV	54	-17.28	-66.1	-66.88	4.92	-58.54
5	21146.4	45.77 PK	74	-28.23	-56.78	-58.18	4.92	-49.49
6	21146.4	38.57 AV	54	-15.43	-64.96	-64.3	4.92	-56.69
7	23876.5	46.87 PK	74	-27.13	-56.79	-55.9	4.92	-48.39
8	23876.5	39.96 AV	54	-14.04	-63.51	-62.96	4.92	-55.3
9	38837.42	41.42 PK	74	-32.58	-61.5	-62.07	4.92	-53.84
10	38837.42	33.55 AV	54	-20.45	-69.42	-69.87	4.92	-61.71

Note: Margin value = Emission Level - Limit value

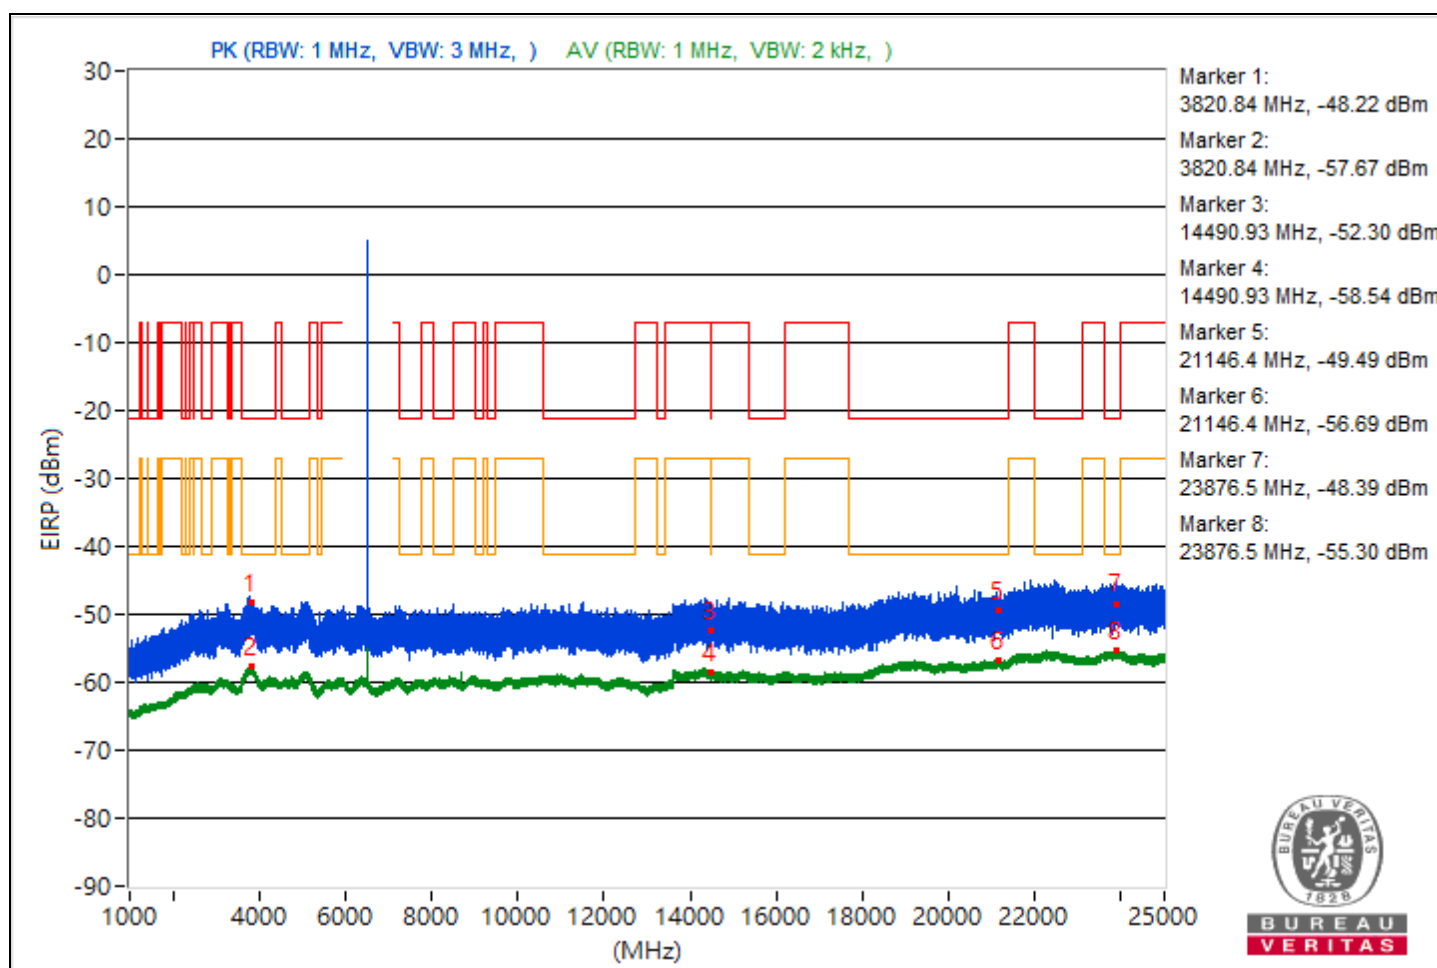


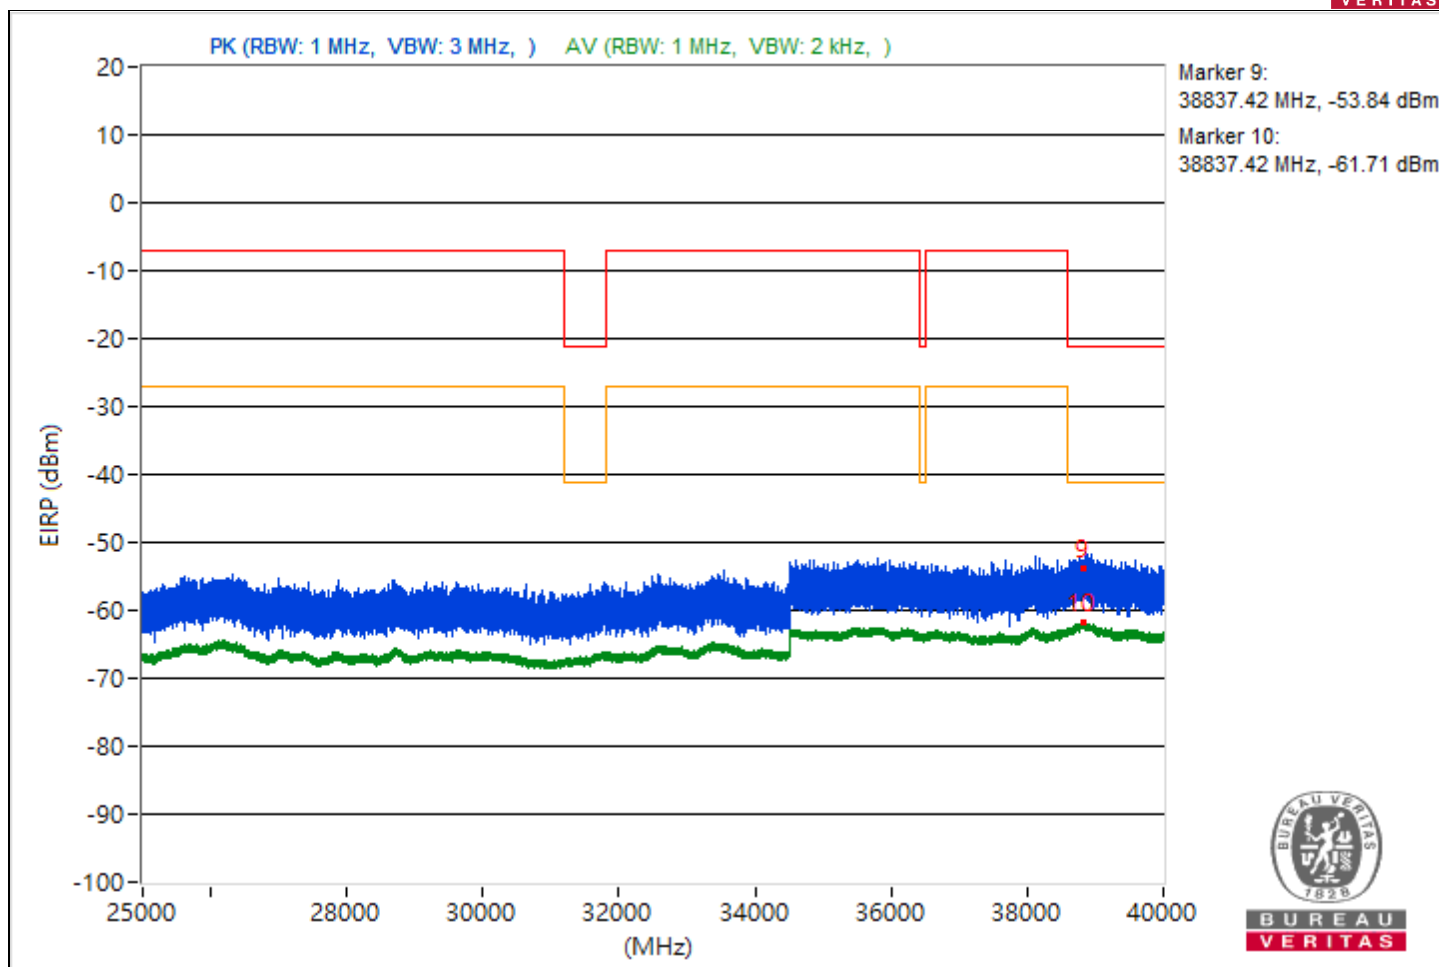


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.59	45.48 PK	74	-28.52	-57.95	-57.48	4.92	-49.78
2	3797.59	37.72 AV	54	-16.28	-65.79	-65.17	4.92	-57.54
3	14497.6	44.99 PK	74	-29.01	-58.9	-57.6	4.92	-50.27
4	14497.6	36.82 AV	54	-17.18	-66	-66.77	4.92	-58.44
5	21398.5	46.16 PK	74	-27.84	-58.26	-56.08	4.92	-49.1
6	21398.5	38.5 AV	54	-15.5	-65.24	-64.2	4.92	-56.76
7	23860.8	45.65 PK	74	-28.35	-58.39	-56.84	4.92	-49.61
8	23860.8	39.88 AV	54	-14.12	-63.9	-62.79	4.92	-55.38
9	38872.8	39.07 PK	74	-34.93	-62.9	-65.84	4.92	-56.19
10	38872.8	33.39 AV	54	-20.61	-70.18	-69.46	4.92	-61.87

Note: Margin value = Emission Level - Limit value

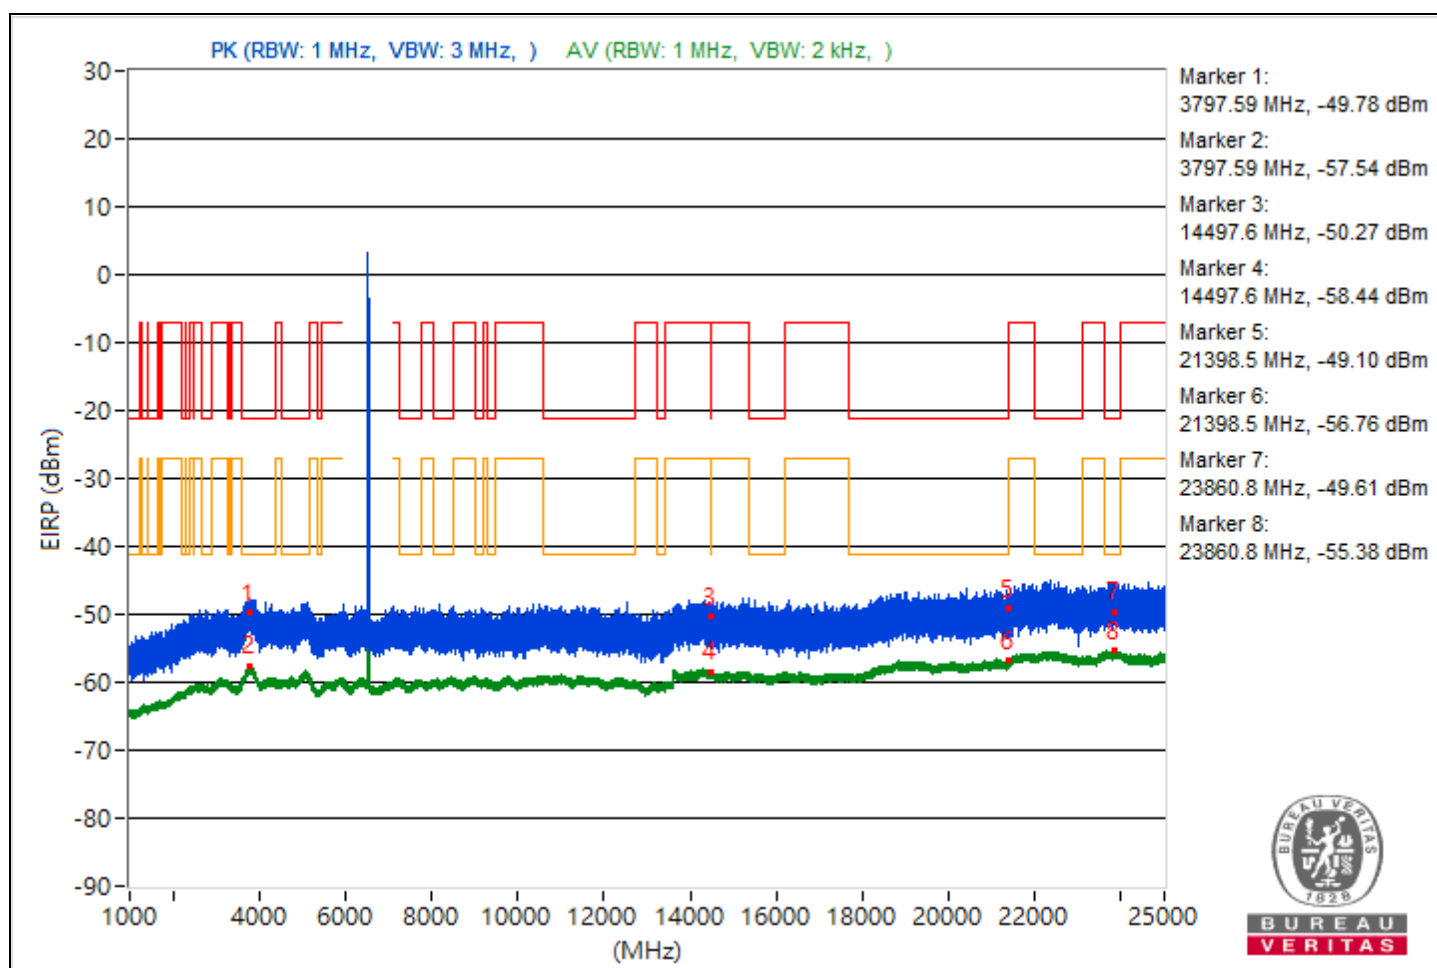


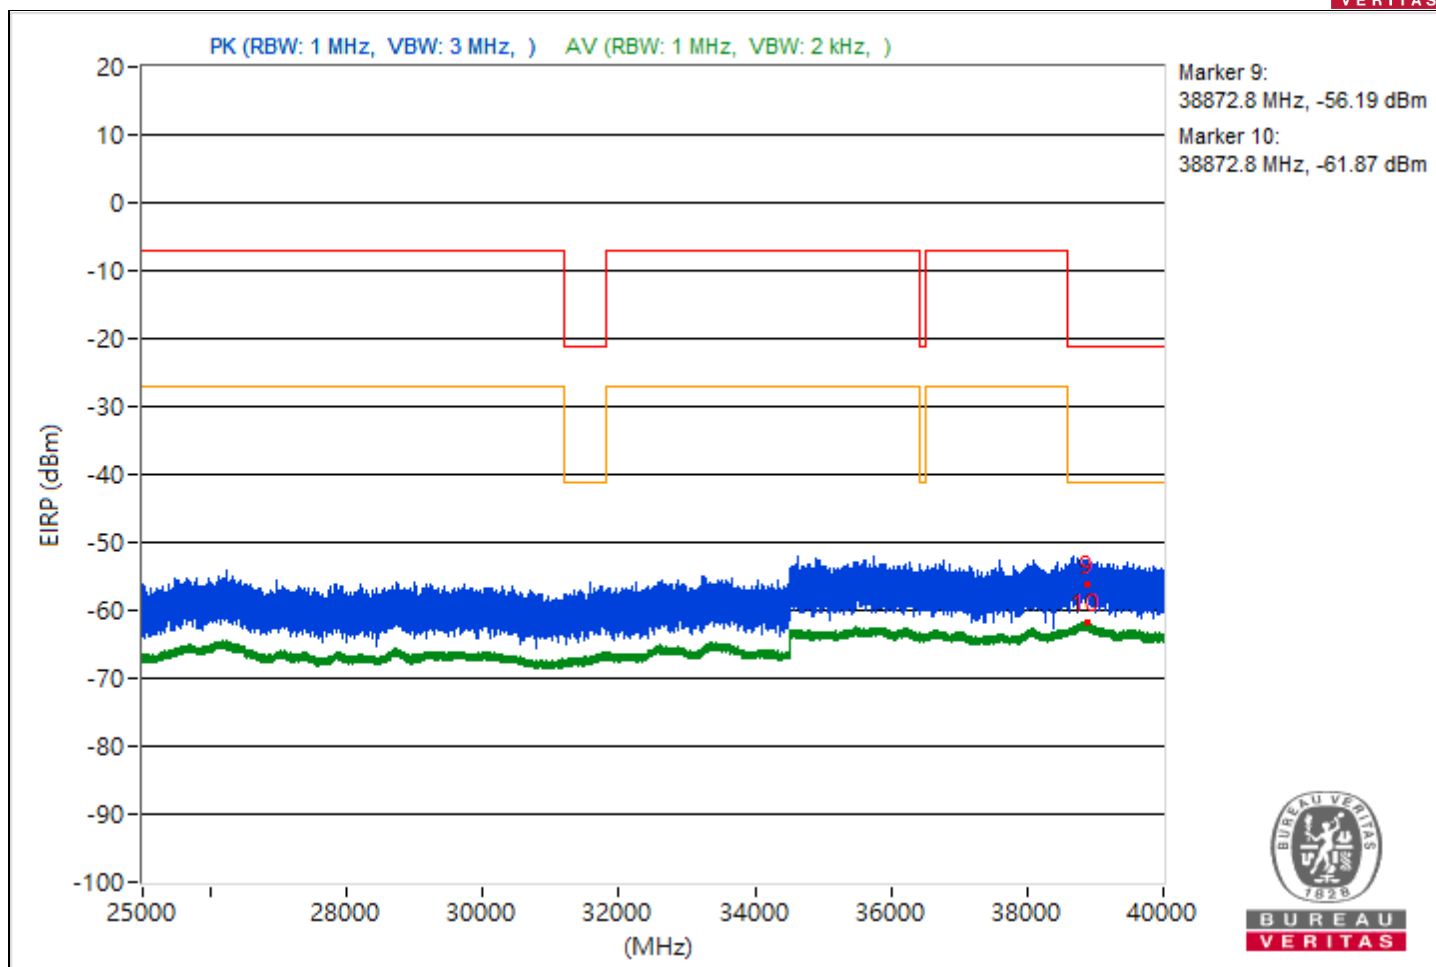


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3831.03	44.49 PK	74	-29.51	-58.16	-59.33	4.92	-50.77
2	3831.03	37.65 AV	54	-16.35	-65.81	-65.3	4.92	-57.61
3	14474.13	43.78 PK	74	-30.22	-60.25	-58.7	4.92	-51.48
4	14474.13	36.81 AV	54	-17.19	-66.63	-66.15	4.92	-58.45
5	21115.9	45.53 PK	74	-28.47	-60.14	-56.09	4.92	-49.73
6	21115.9	38.5 AV	54	-15.5	-65.25	-64.19	4.92	-56.76
7	23854.6	46.24 PK	74	-27.76	-56.85	-57.05	4.92	-49.02
8	23854.6	39.72 AV	54	-14.28	-63.12	-63.86	4.92	-55.54
9	38810.13	41.01 PK	74	-32.99	-63.12	-61.41	4.92	-54.25
10	38810.13	33.45 AV	54	-20.55	-70.23	-69.3	4.92	-61.81

Note: Margin value = Emission Level - Limit value

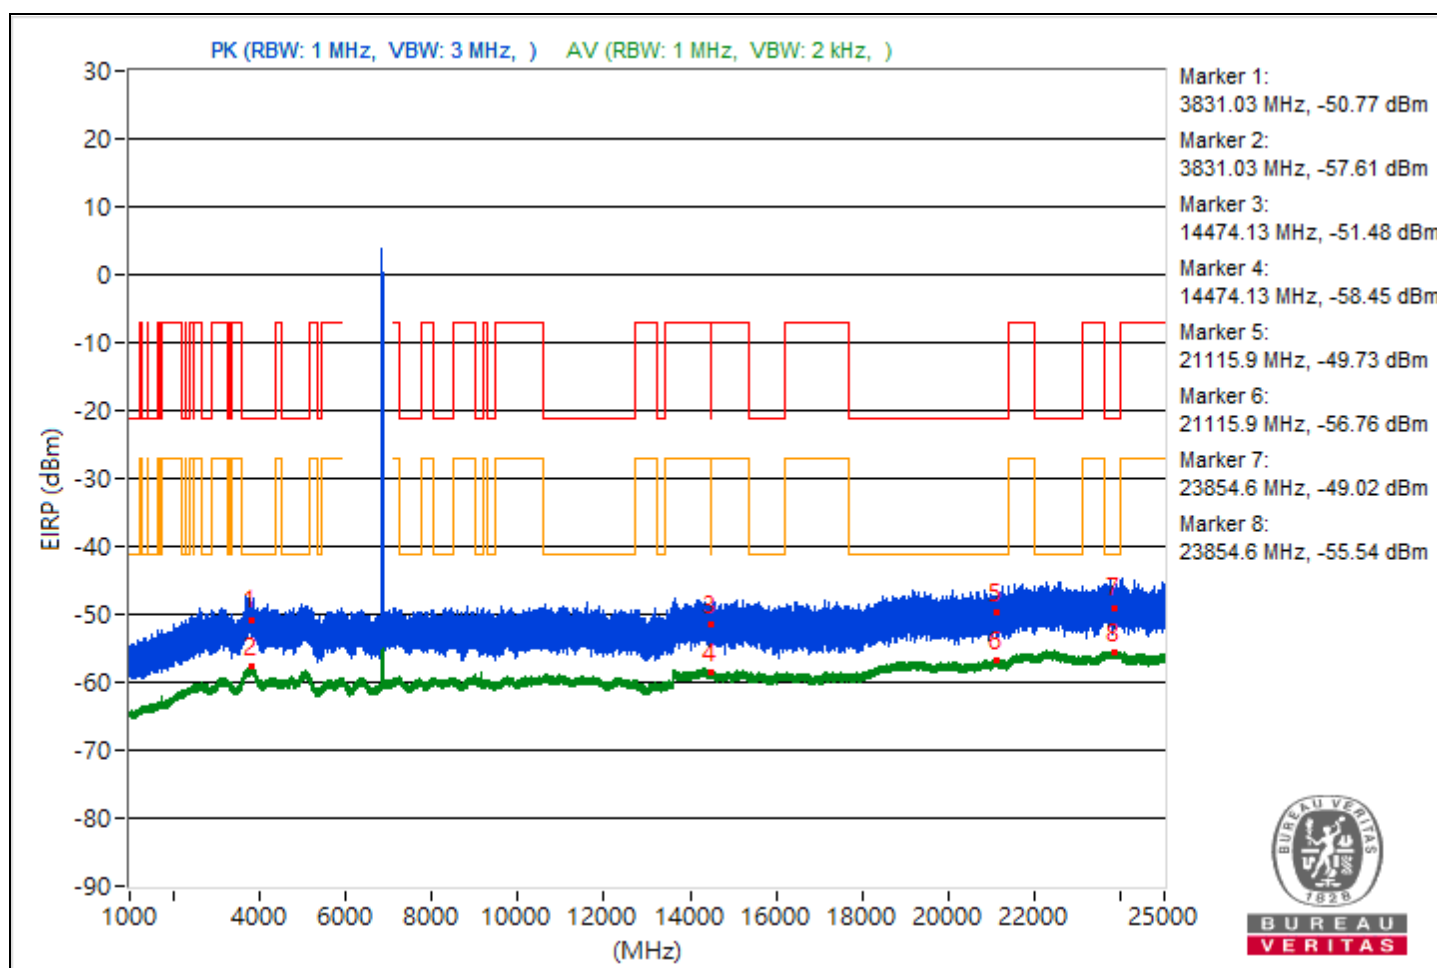


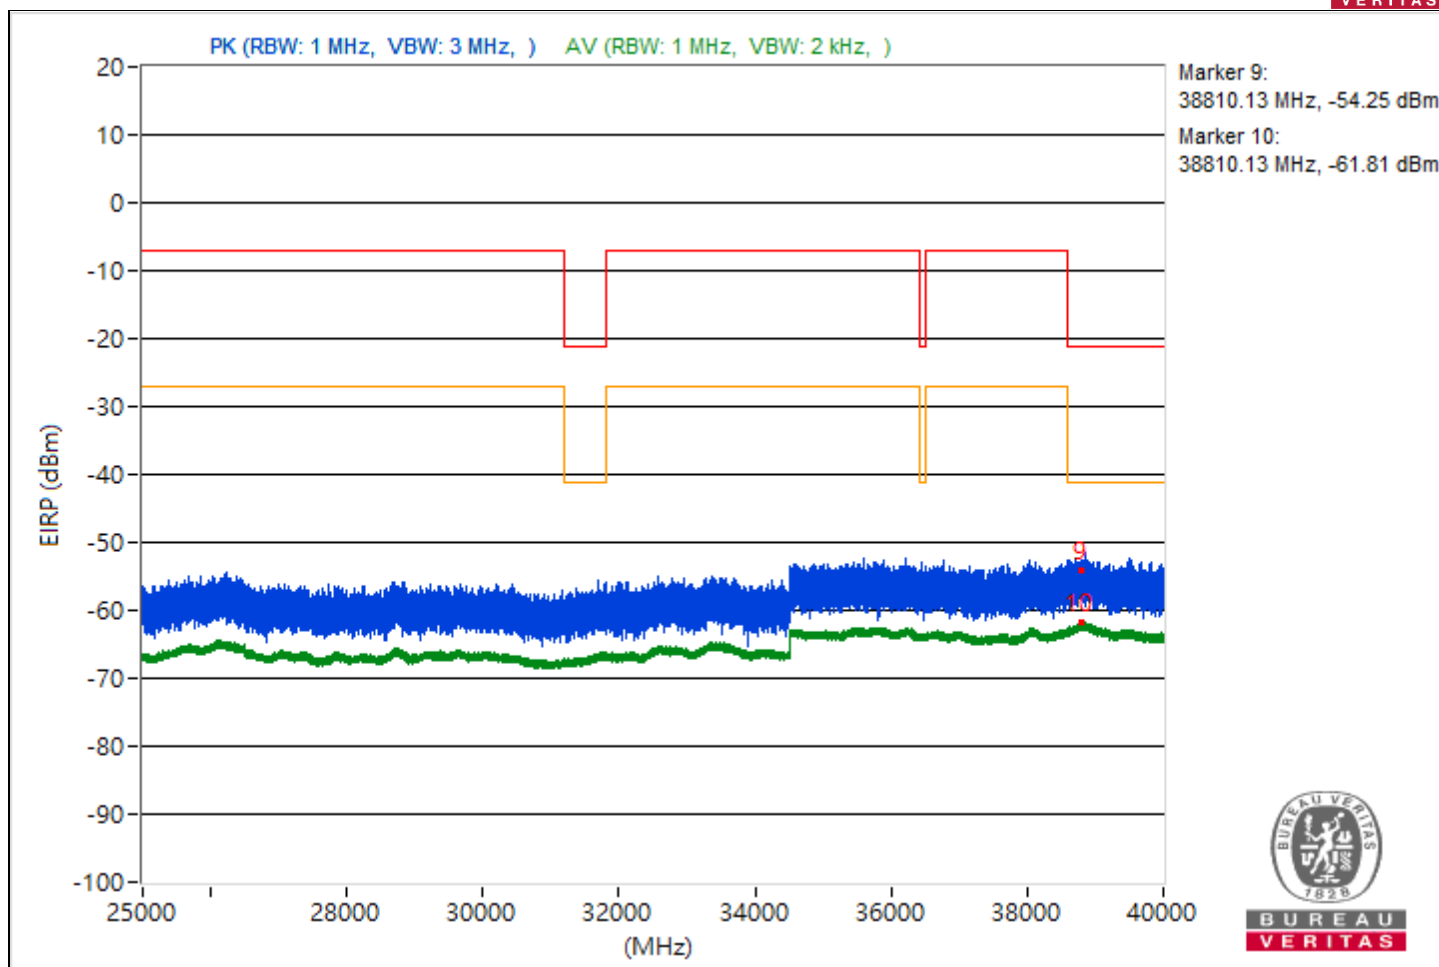


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.86	46.44 PK	74	-27.56	-54.77	-60.5	4.92	-48.82
2	3807.86	37.57 AV	54	-16.43	-65.07	-66.25	4.92	-57.69
3	14471.29	44.4 PK	74	-29.6	-59.25	-58.37	4.92	-50.86
4	14471.29	36.81 AV	54	-17.19	-66.1	-66.67	4.92	-58.45
5	21160.2	44.87 PK	74	-29.13	-58.17	-58.48	4.92	-50.39
6	21160.2	38.52 AV	54	-15.48	-65.02	-64.35	4.92	-56.74
7	22273.6	44.89 PK	74	-29.11	-59.19	-57.56	4.92	-50.37
8	22273.6	39.79 AV	54	-14.21	-63.06	-63.78	4.92	-55.47
9	38831.2	41.29 PK	74	-32.71	-60.61	-63.75	4.92	-53.97
10	38831.2	33.42 AV	54	-20.58	-69.36	-70.22	4.92	-61.84

Note: Margin value = Emission Level - Limit value

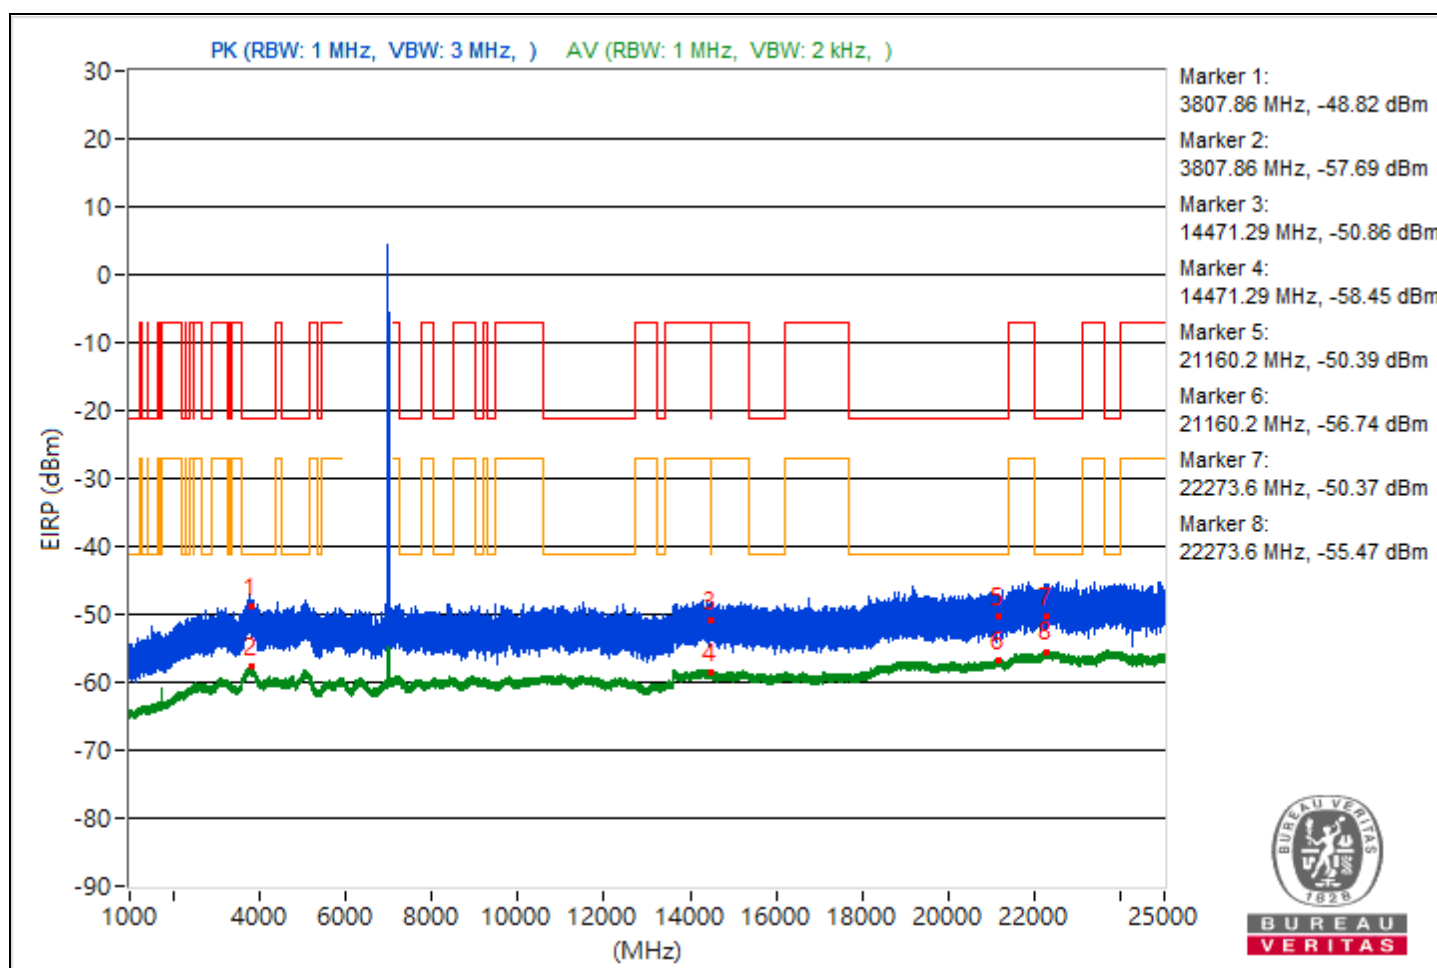


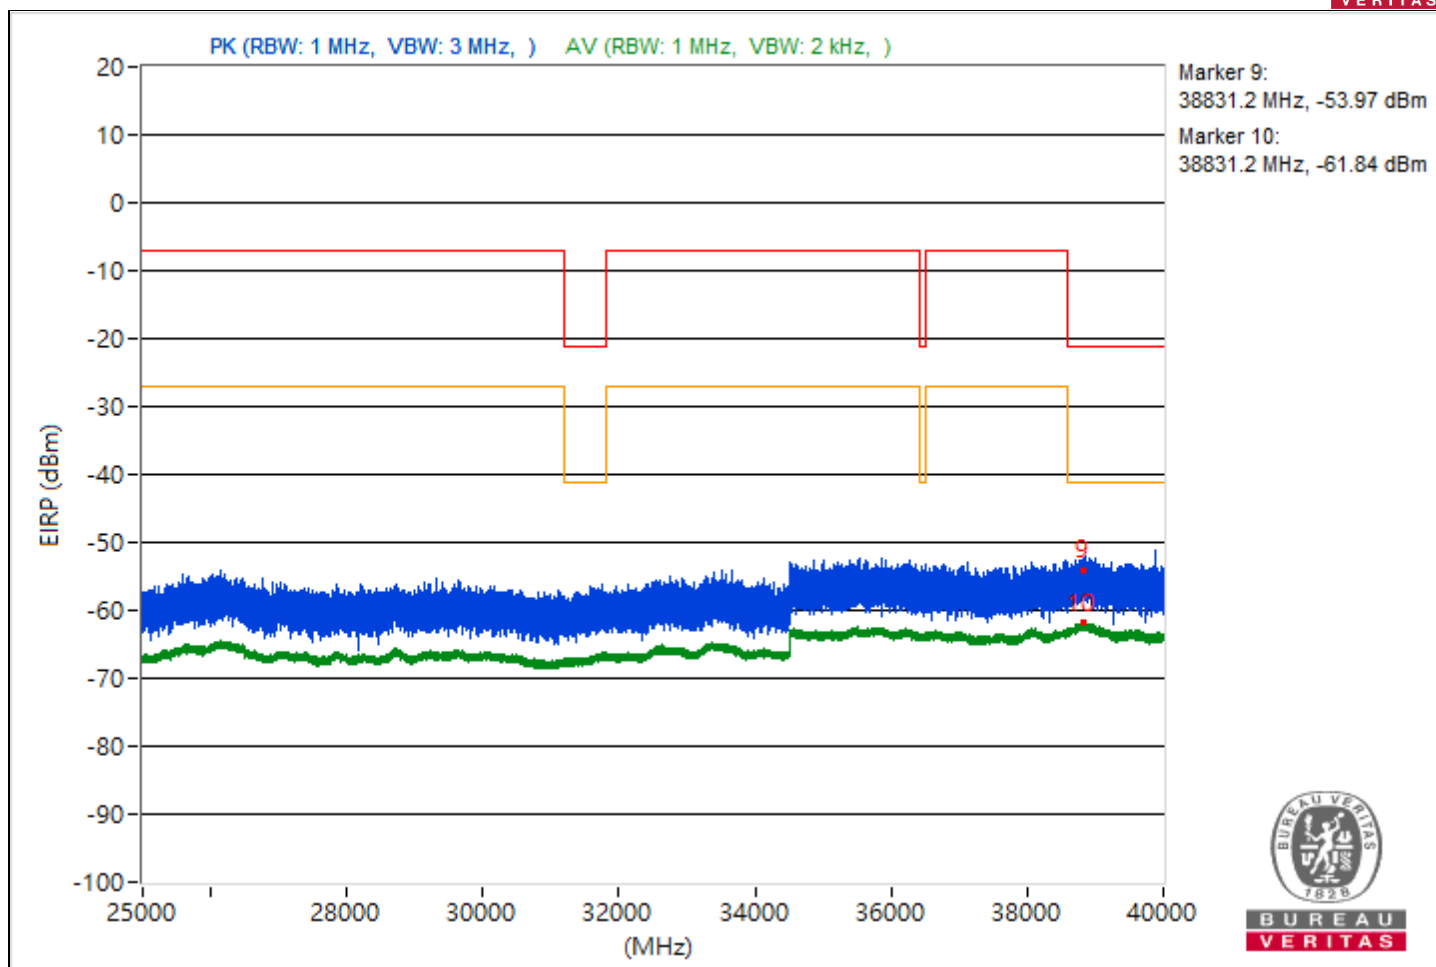


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.36	45.5 PK	74	-28.5	-57.22	-58.21	4.92	-49.76
2	3804.36	37.69 AV	54	-16.31	-65.63	-65.38	4.92	-57.57
3	14491.2	42.37 PK	74	-31.63	-61.55	-60.19	4.92	-52.89
4	14491.2	36.72 AV	54	-17.28	-66.79	-66.18	4.92	-58.54
5	21150.5	46.2 PK	74	-27.8	-56.91	-57.06	4.92	-49.06
6	21150.5	38.38 AV	54	-15.62	-65.22	-64.43	4.92	-56.88
7	23793.7	47.87 PK	74	-26.13	-55.65	-55.01	4.92	-47.39
8	23793.7	39.77 AV	54	-14.23	-63.79	-63.08	4.92	-55.49
9	38807.73	38.75 PK	74	-35.25	-65.09	-63.87	4.92	-56.51
10	38807.73	33.55 AV	54	-20.45	-69.89	-69.4	4.92	-61.71

Note: Margin value = Emission Level - Limit value

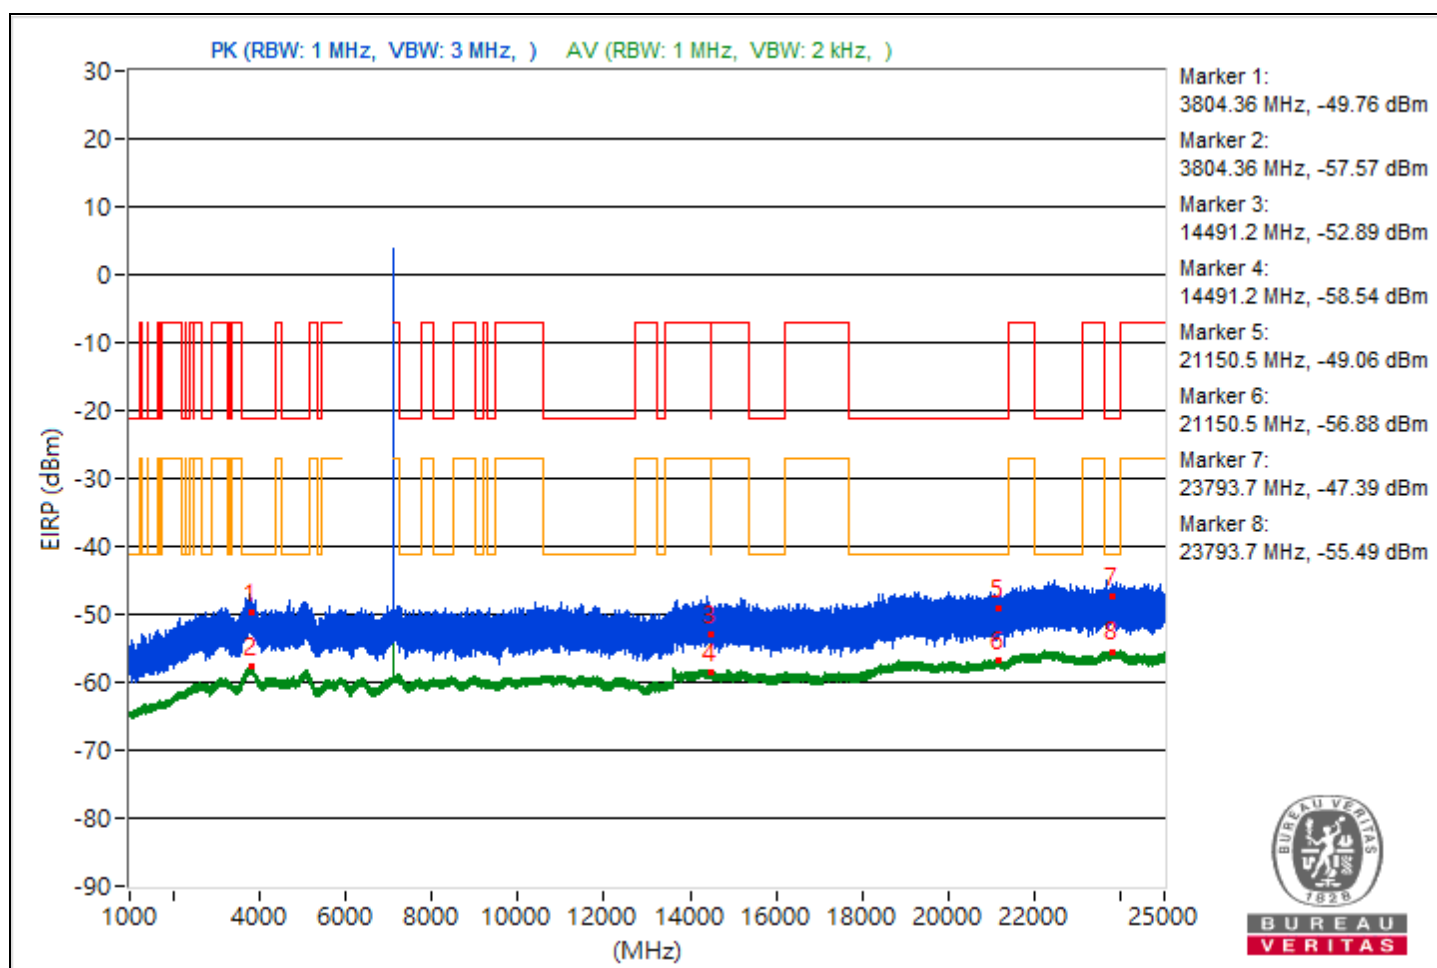


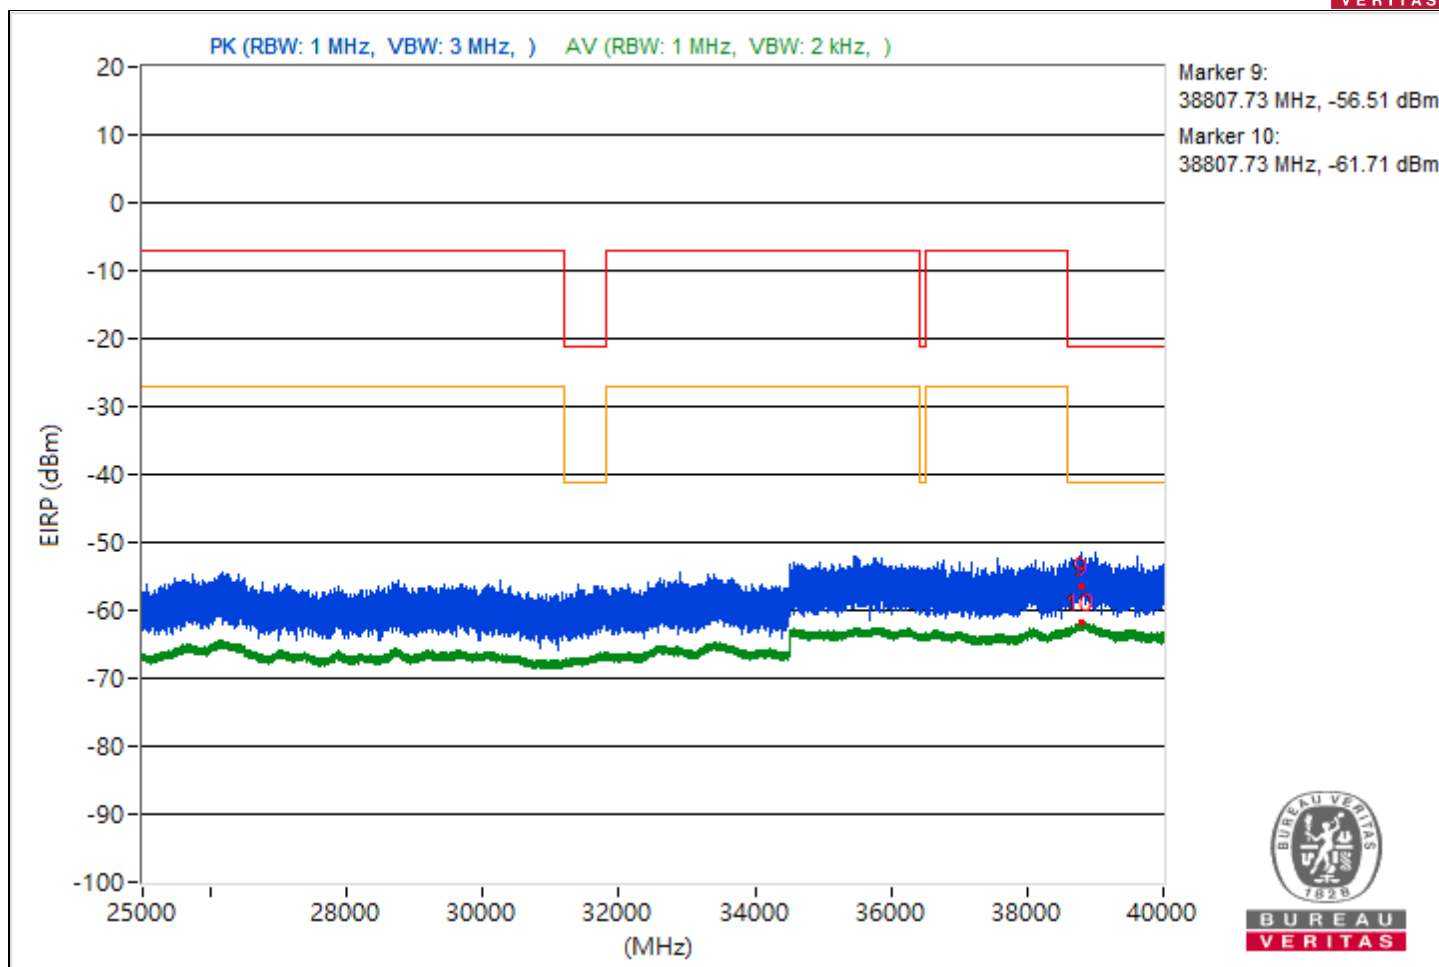


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.98	47.04 PK	74	-26.96	-55.96	-56.34	4.92	-48.22
2	3797.98	37.58 AV	54	-16.42	-65.4	-65.83	4.92	-57.68
3	14489.33	43.09 PK	74	-30.91	-60.45	-59.77	4.92	-52.17
4	14489.33	36.81 AV	54	-17.19	-66.19	-66.57	4.92	-58.45
5	21392	45.44 PK	74	-28.56	-59.97	-56.29	4.92	-49.82
6	21392	38.53 AV	54	-15.47	-64.92	-64.42	4.92	-56.73
7	23882.1	47.89 PK	74	-26.11	-54.25	-56.68	4.92	-47.37
8	23882.1	39.98 AV	54	-14.02	-63.43	-63	4.92	-55.28
9	38841.24	38.85 PK	74	-35.15	-63.6	-65.23	4.92	-56.41
10	38841.24	33.34 AV	54	-20.66	-70.32	-69.44	4.92	-61.92

Note: Margin value = Emission Level - Limit value

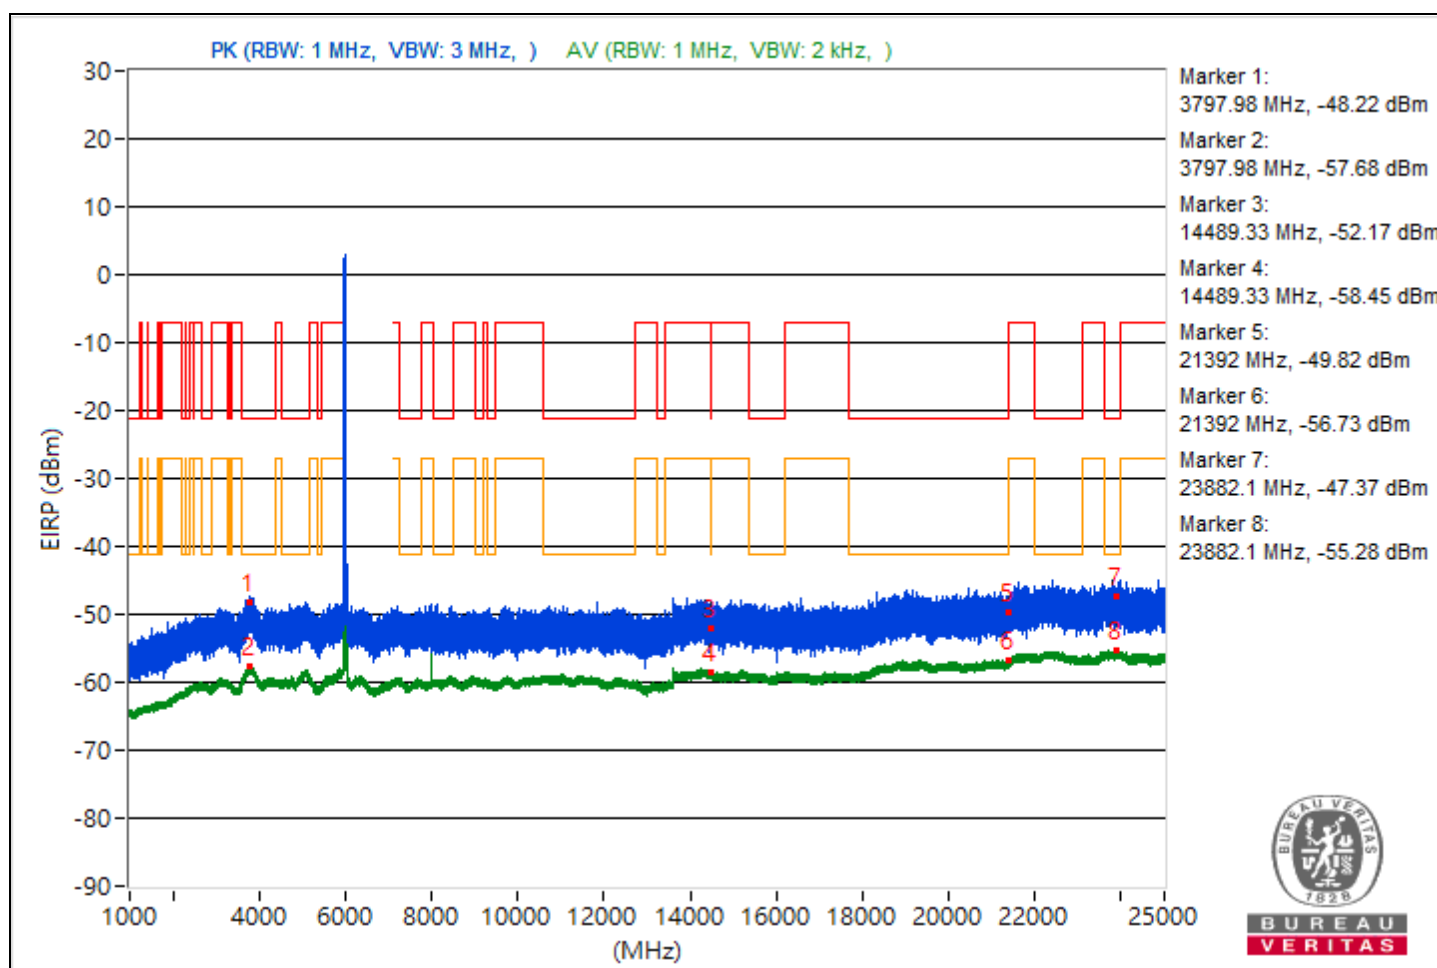


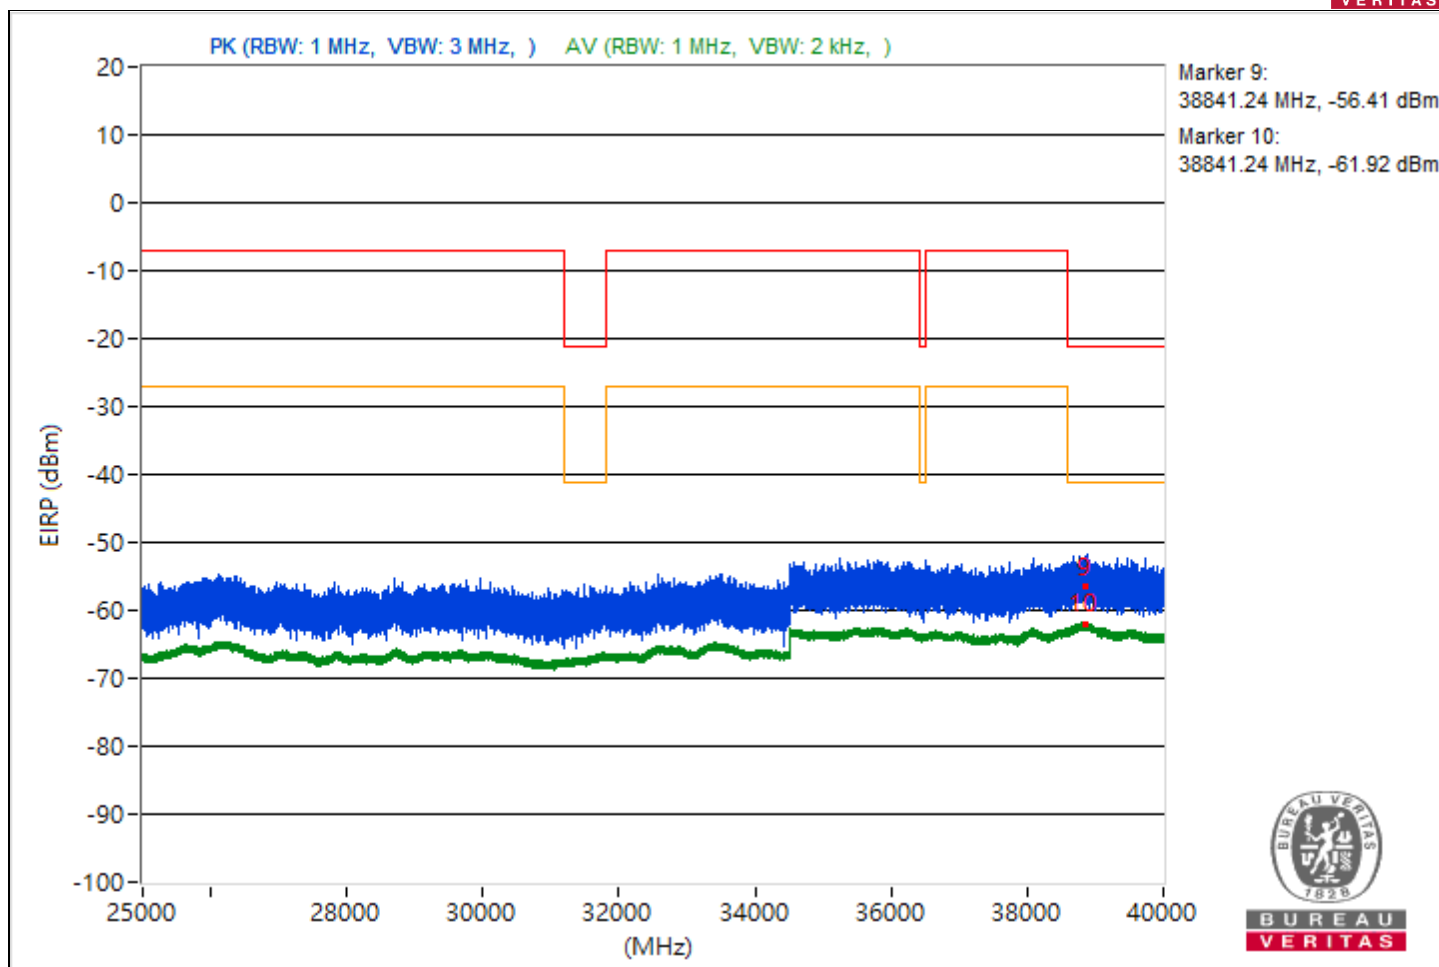


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.83	42.02 PK	74	-31.98	-61.04	-61.3	4.92	-53.24
2	3812.83	37.62 AV	54	-16.38	-65.26	-65.91	4.92	-57.64
3	14472.8	44.31 PK	74	-29.69	-57.42	-61.11	4.92	-50.95
4	14472.8	36.74 AV	54	-17.26	-66.93	-66.03	4.92	-58.52
5	21130.8	47.85 PK	74	-26.15	-53.68	-58.07	4.92	-47.41
6	21130.8	38.55 AV	54	-15.45	-64.99	-64.32	4.92	-56.71
7	22278	45.34 PK	74	-28.66	-58.14	-57.58	4.92	-49.92
8	22278	39.84 AV	54	-14.16	-62.81	-63.97	4.92	-55.42
9	38829.16	40.79 PK	74	-33.21	-63.8	-61.34	4.92	-54.47
10	38829.16	33.41 AV	54	-20.59	-70.25	-69.36	4.92	-61.85

Note: Margin value = Emission Level - Limit value

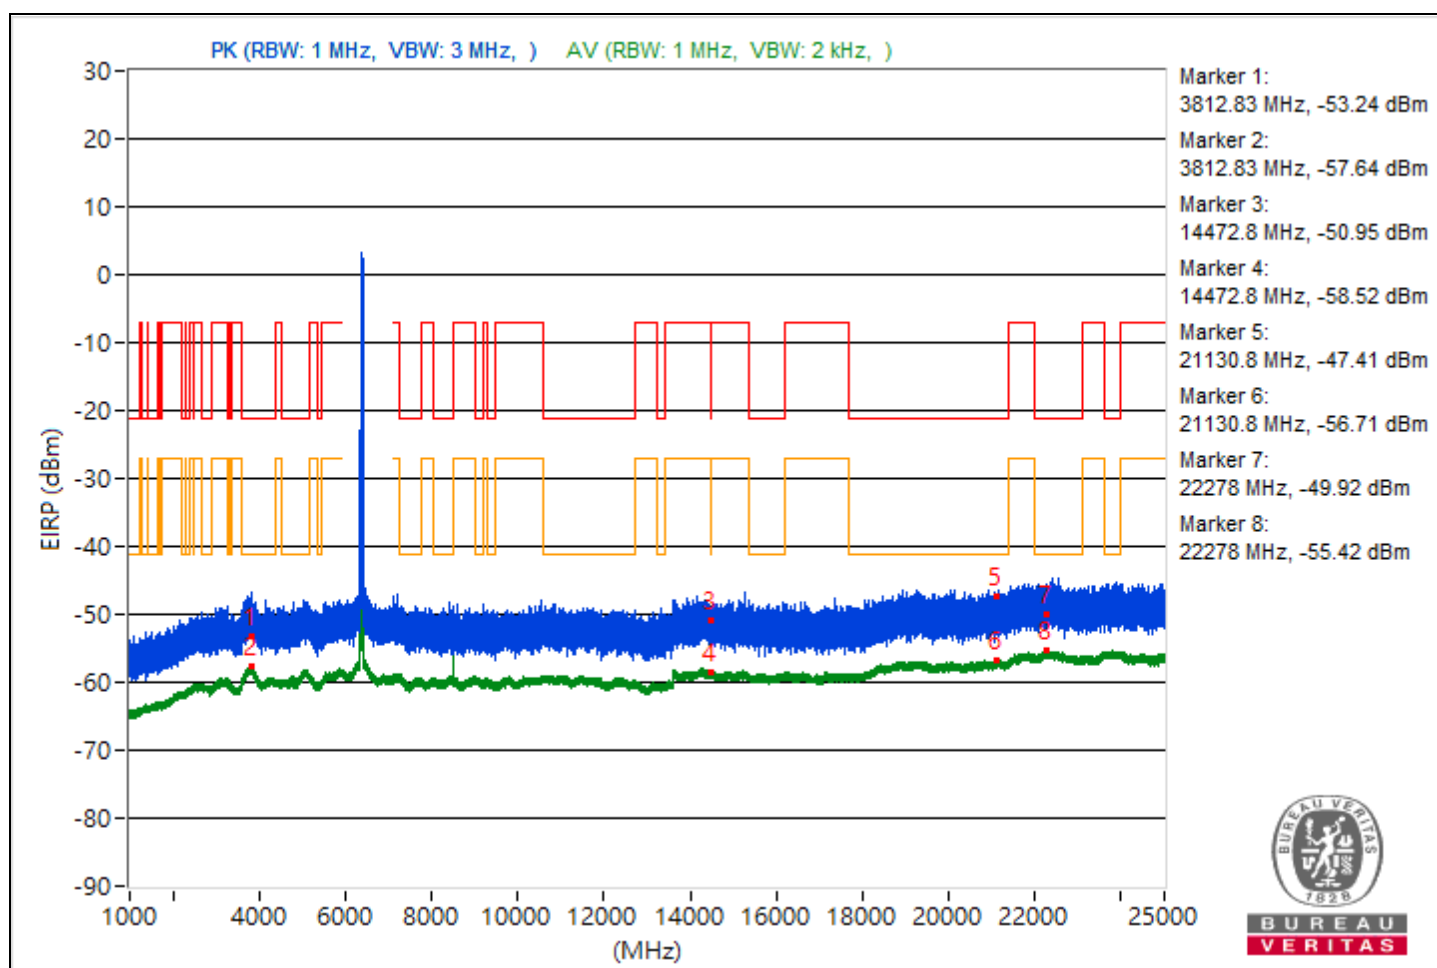


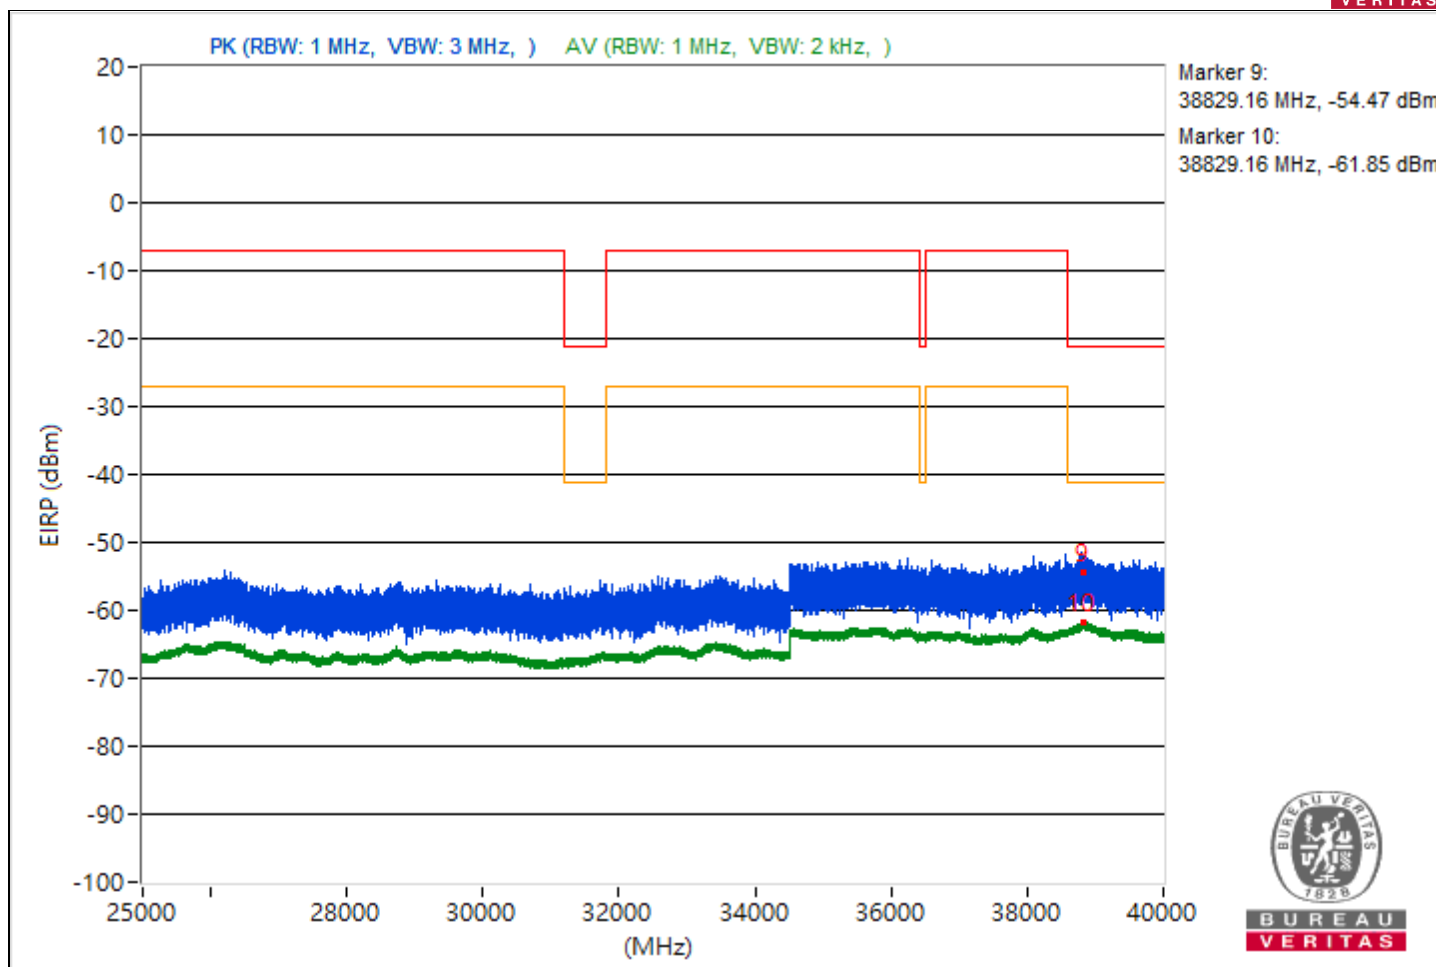


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.96	44.37 PK	74	-29.63	-58.01	-59.83	4.92	-50.89
2	3802.96	37.62 AV	54	-16.38	-66.22	-65	4.92	-57.64
3	14480.09	43.74 PK	74	-30.26	-60.24	-58.79	4.92	-51.52
4	14480.09	36.76 AV	54	-17.24	-66.83	-66.07	4.92	-58.5
5	21115.9	44.38 PK	74	-29.62	-58.23	-59.48	4.92	-50.88
6	21115.9	38.62 AV	54	-15.38	-64.36	-64.79	4.92	-56.64
7	22439.6	47.97 PK	74	-26.03	-54.84	-55.63	4.92	-47.29
8	22439.6	39.84 AV	54	-14.16	-63.05	-63.68	4.92	-55.42
9	38806.67	38.22 PK	74	-35.78	-63.6	-66.98	4.92	-57.04
10	38806.67	33.55 AV	54	-20.45	-69.53	-69.76	4.92	-61.71

Note: Margin value = Emission Level - Limit value

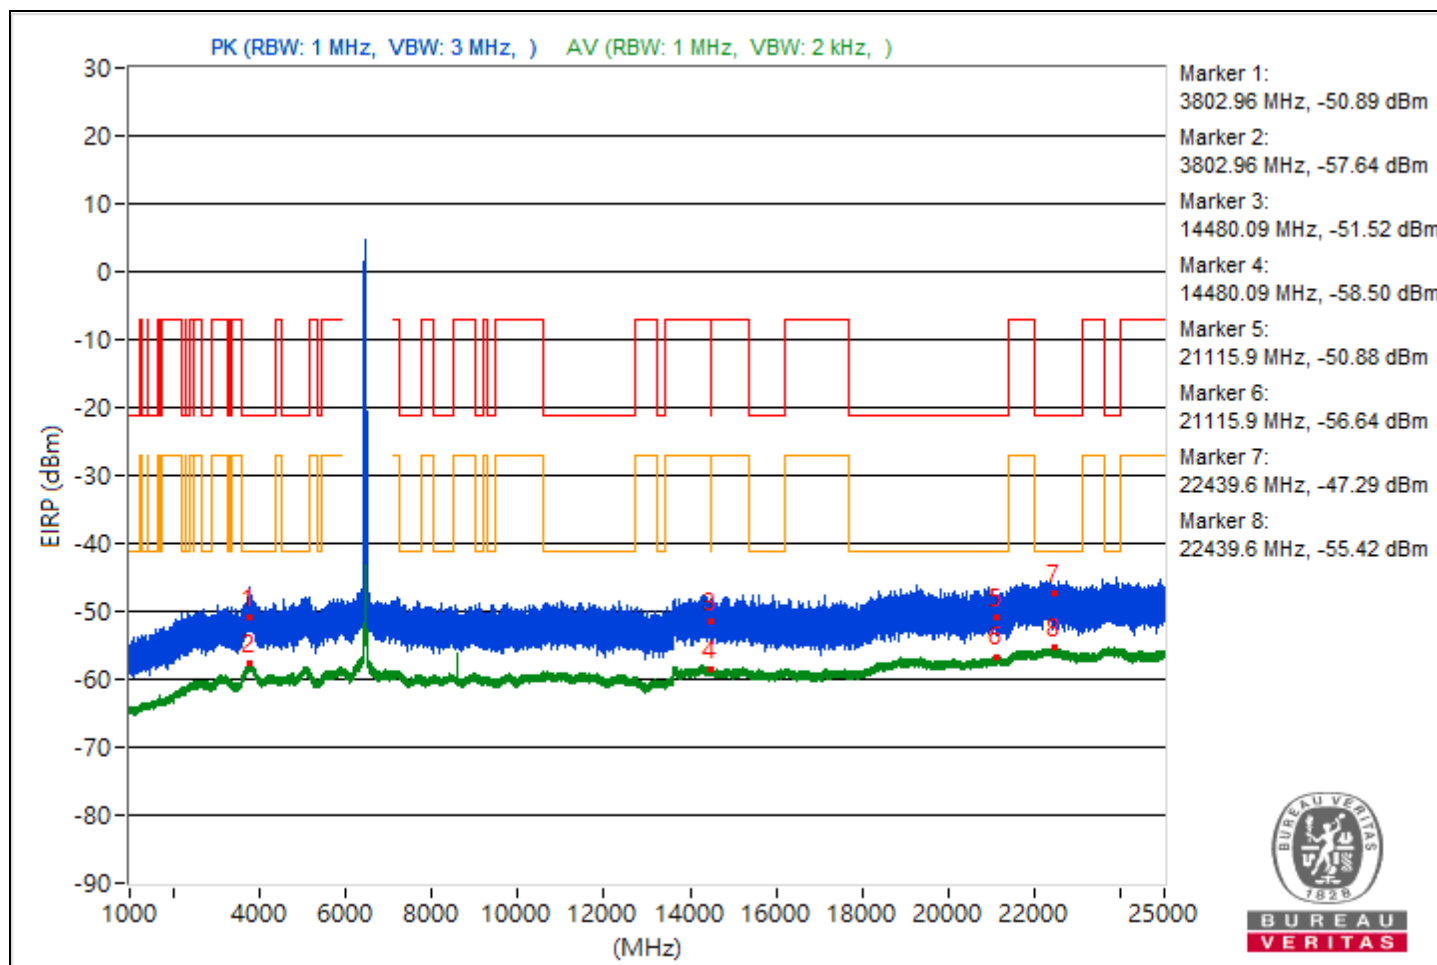


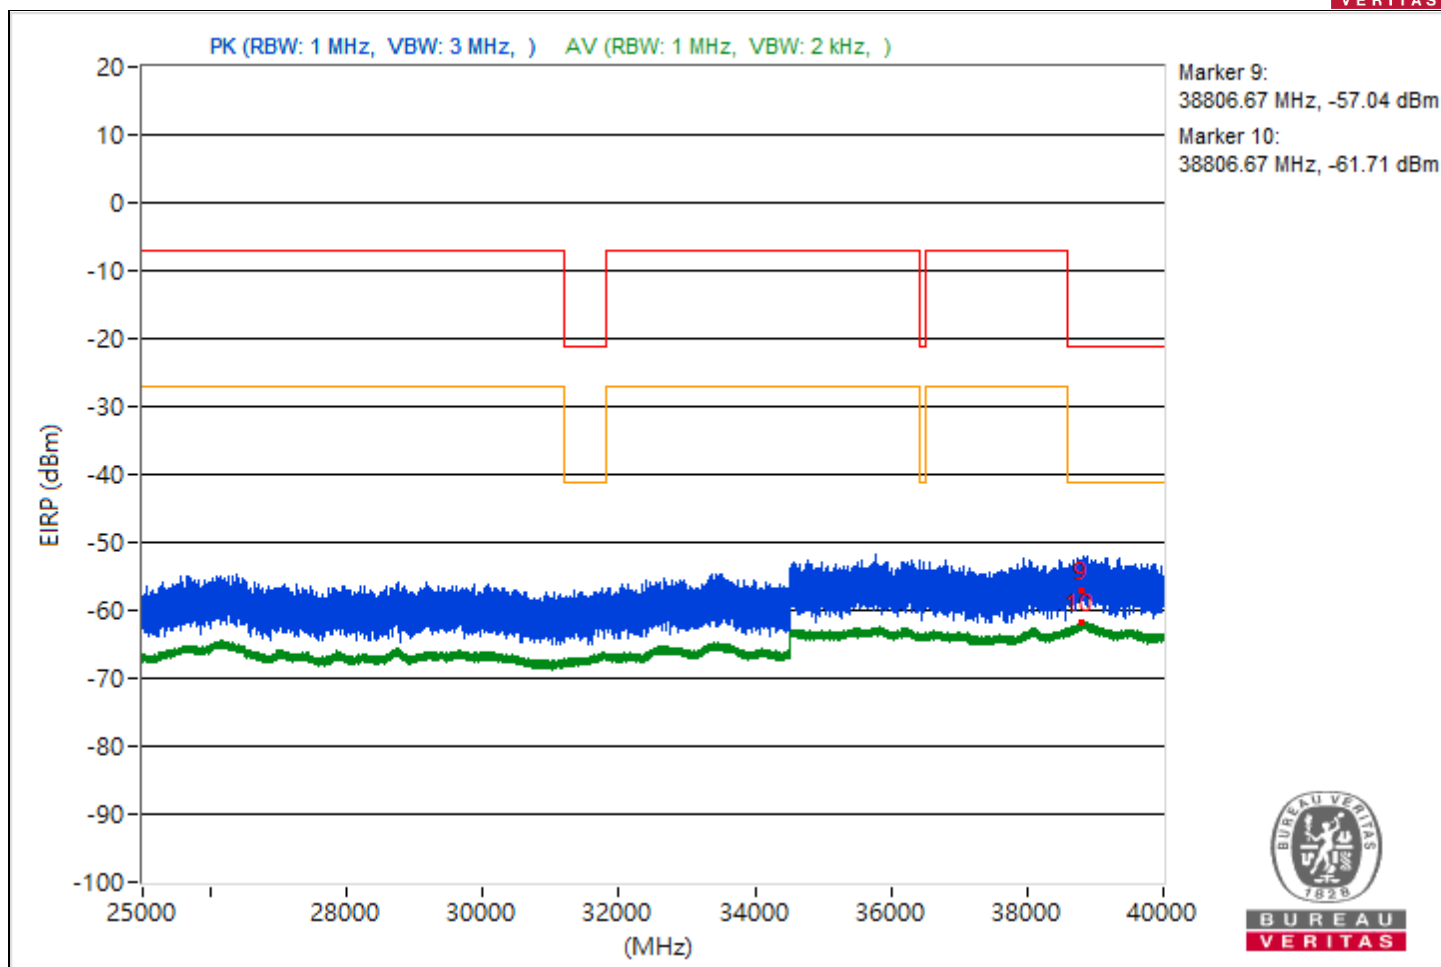


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.77	44.34 PK	74	-29.66	-58.09	-59.78	4.92	-50.92
2	3806.77	37.48 AV	54	-16.52	-65.36	-66.11	4.92	-57.78
3	14474.76	43.88 PK	74	-30.12	-58.6	-60.17	4.92	-51.38
4	14474.76	36.8 AV	54	-17.2	-66.1	-66.7	4.92	-58.46
5	21104.8	45.18 PK	74	-28.82	-57.58	-58.5	4.92	-50.08
6	21104.8	38.67 AV	54	-15.33	-64.99	-64.09	4.92	-56.59
7	23859.8	46.44 PK	74	-27.56	-55.57	-58.36	4.92	-48.82
8	23859.8	39.82 AV	54	-14.18	-63.1	-63.67	4.92	-55.44
9	38843.38	41.74 PK	74	-32.26	-63.85	-59.91	4.92	-53.52
10	38843.38	33.41 AV	54	-20.59	-69.45	-70.14	4.92	-61.85

Note: Margin value = Emission Level - Limit value

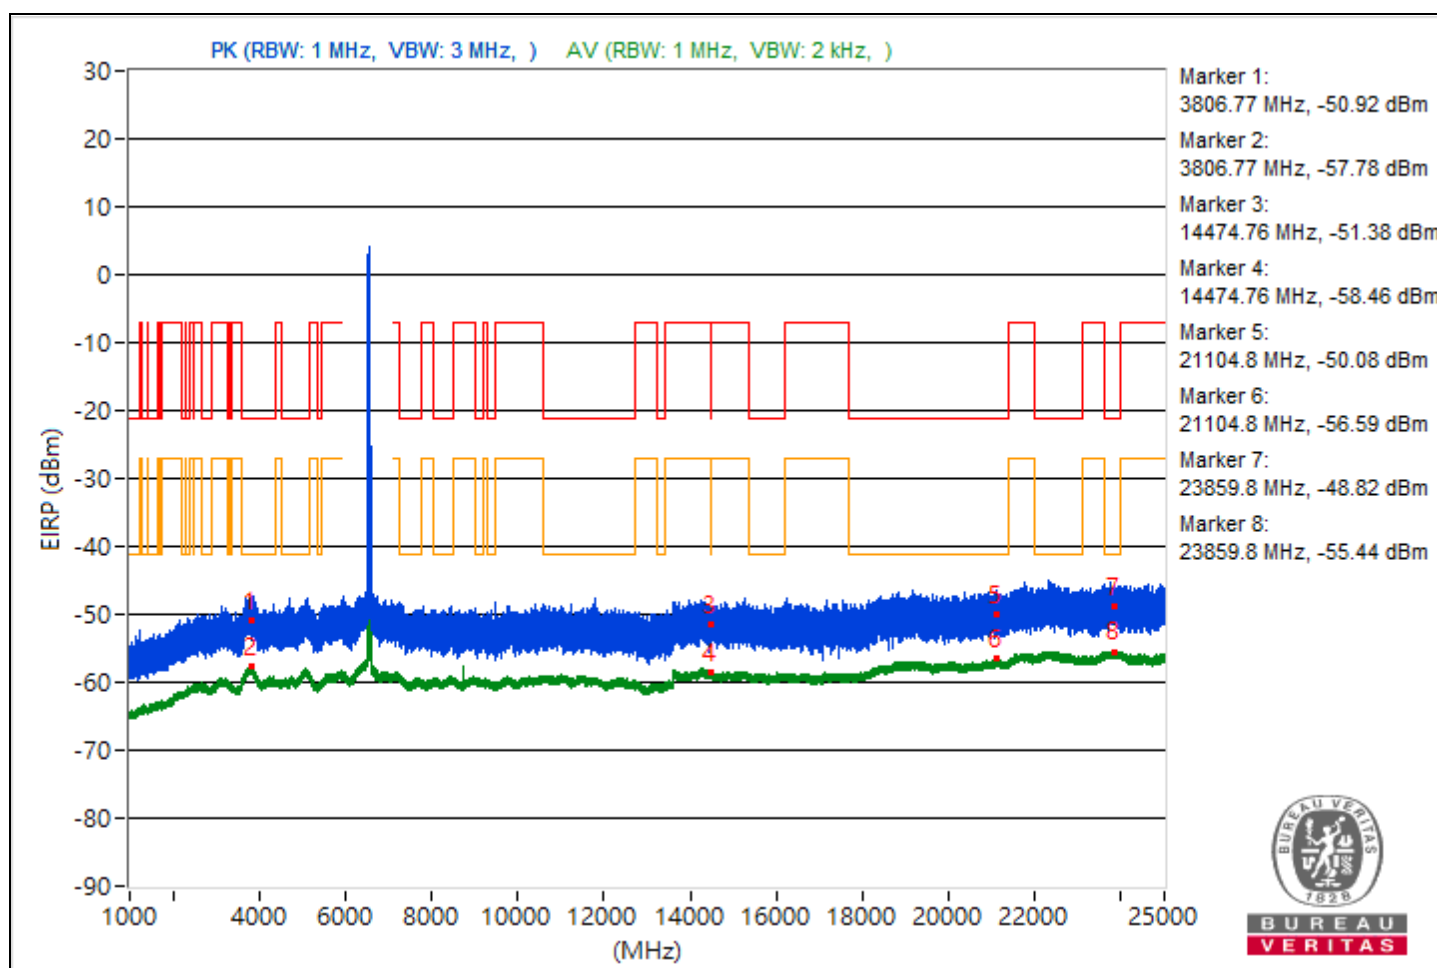


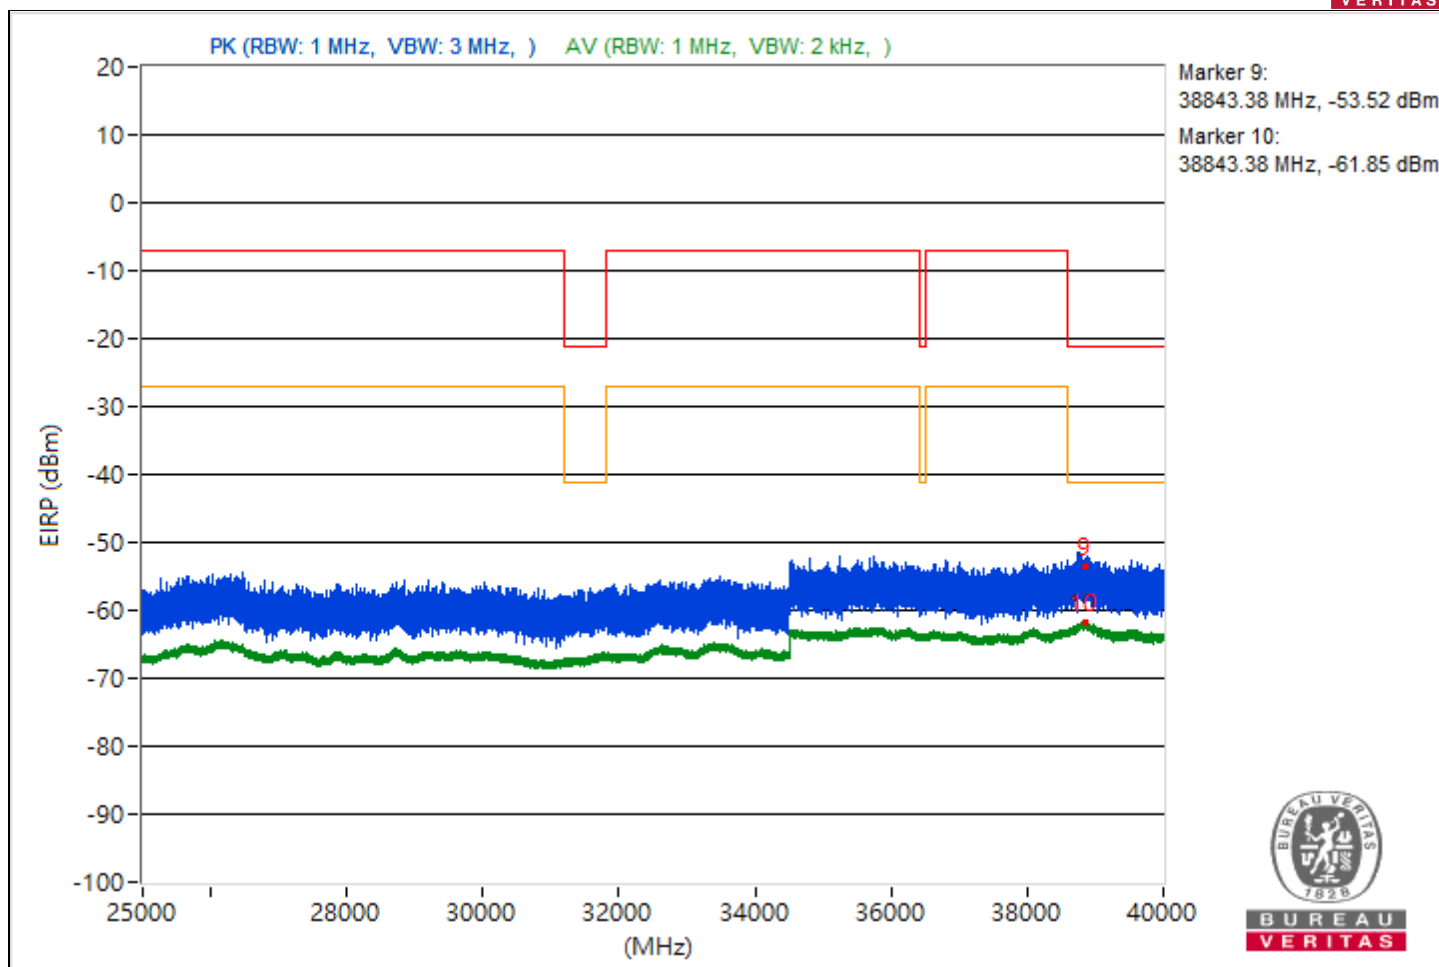


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.86	45.55 PK	74	-28.45	-58.32	-57.06	4.92	-49.71
2	3814.86	37.44 AV	54	-16.56	-65.41	-66.11	4.92	-57.82
3	7265.16	44.1 PK	74	-29.9	-58.88	-59.3	4.92	-51.16
4	7265.16	37.28 AV	54	-16.72	-65.79	-66.03	4.92	-57.98
5	21127.7	45.05 PK	74	-28.95	-57.67	-58.68	4.92	-50.21
6	21127.7	38.59 AV	54	-15.41	-64.98	-64.24	4.92	-56.67
7	23756.2	46.2 PK	74	-27.8	-56.3	-57.82	4.92	-49.06
8	23756.2	39.73 AV	54	-14.27	-63.91	-63.05	4.92	-55.53
9	38856	38.74 PK	74	-35.26	-63.95	-65.03	4.92	-56.52
10	38856	33.35 AV	54	-20.65	-70.33	-69.4	4.92	-61.91

Note: Margin value = Emission Level - Limit value

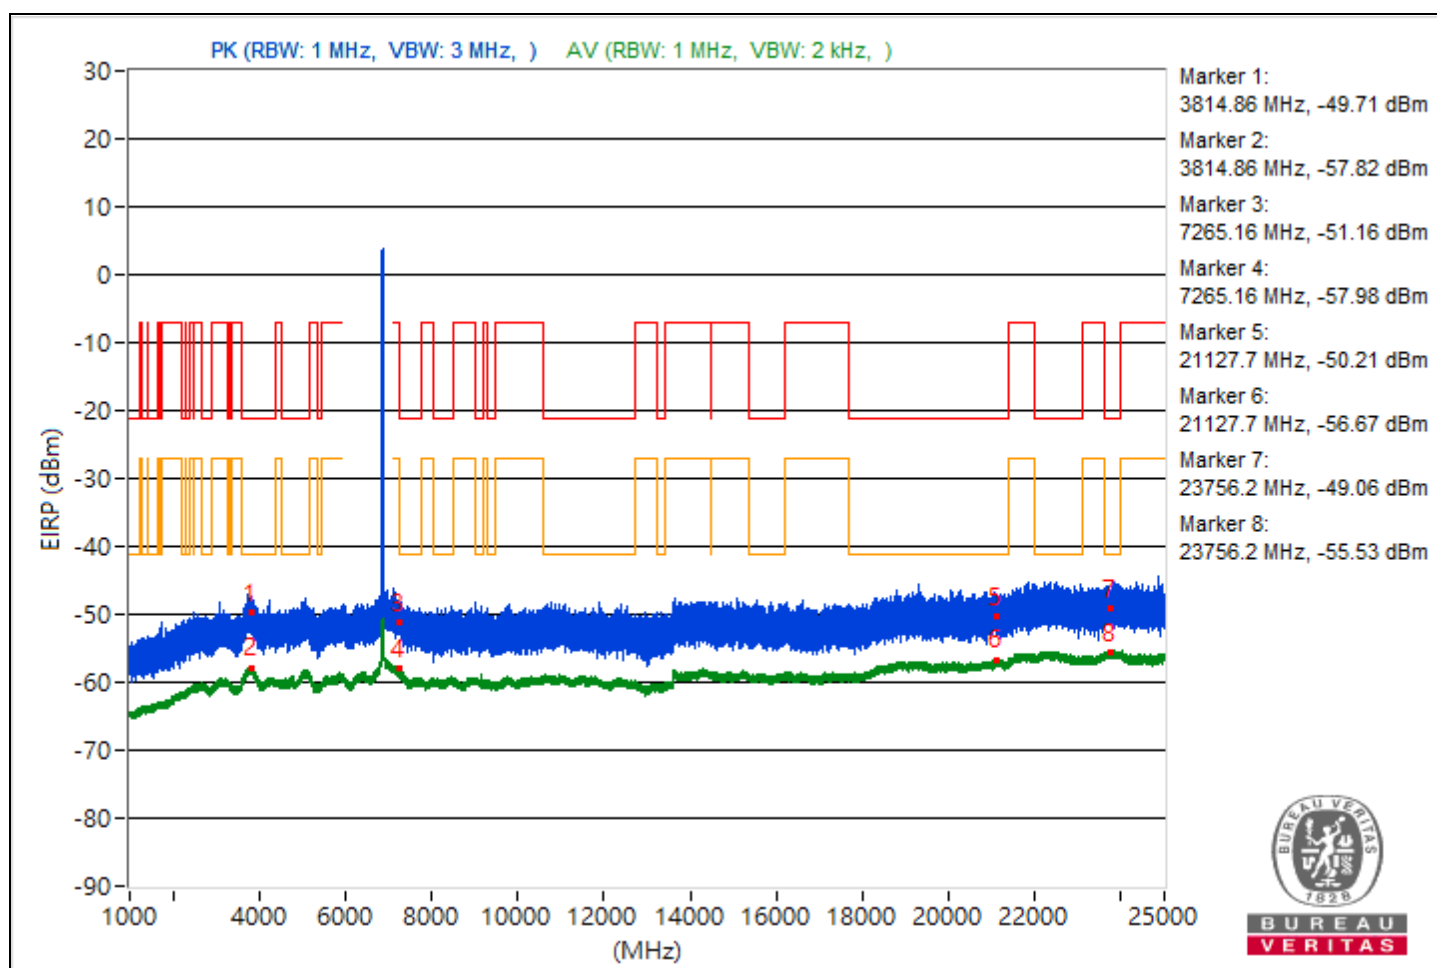


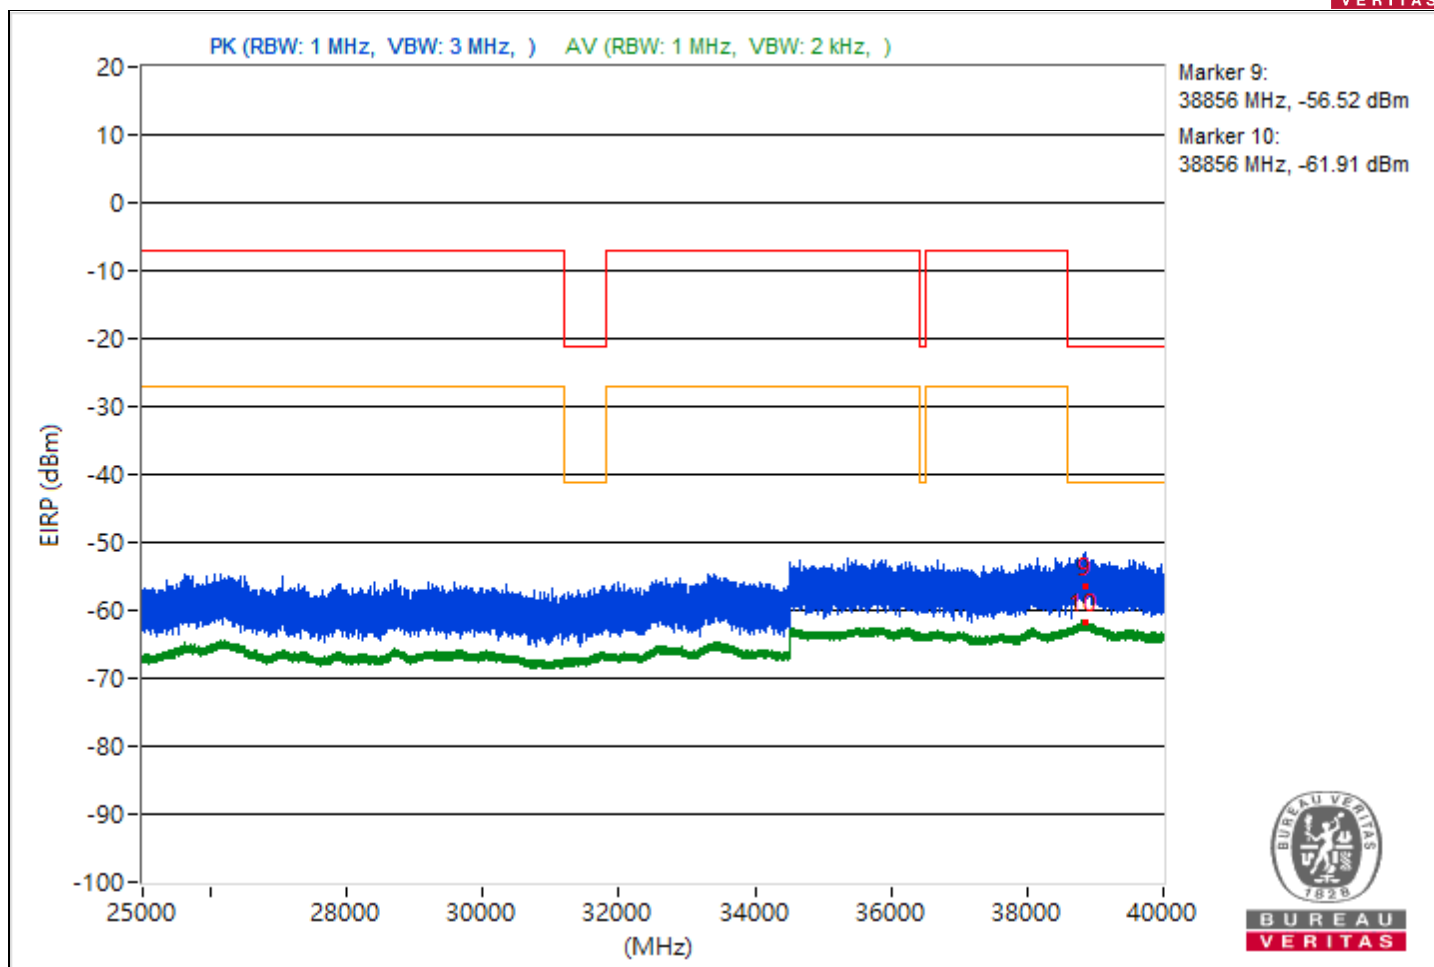


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.4	43.72 PK	74	-30.28	-59.8	-59.16	4.92	-51.54
2	3815.4	37.45 AV	54	-16.55	-65.3	-66.23	4.92	-57.81
3	7279.7	45.13 PK	74	-28.87	-57.55	-58.64	4.92	-50.13
4	7279.7	37.72 AV	54	-16.28	-65.7	-65.26	4.92	-57.54
5	21139.9	43.5 PK	74	-30.5	-59.12	-60.36	4.92	-51.76
6	21139.9	38.4 AV	54	-15.6	-65.35	-64.3	4.92	-56.86
7	22235.5	48.91 PK	74	-25.09	-55.31	-53.44	4.92	-46.35
8	22235.5	39.8 AV	54	-14.2	-62.83	-64.03	4.92	-55.46
9	38852.44	39.74 PK	74	-34.26	-65.37	-62.12	4.92	-55.52
10	38852.44	33.7 AV	54	-20.3	-69.85	-69.17	4.92	-61.56

Note: Margin value = Emission Level - Limit value

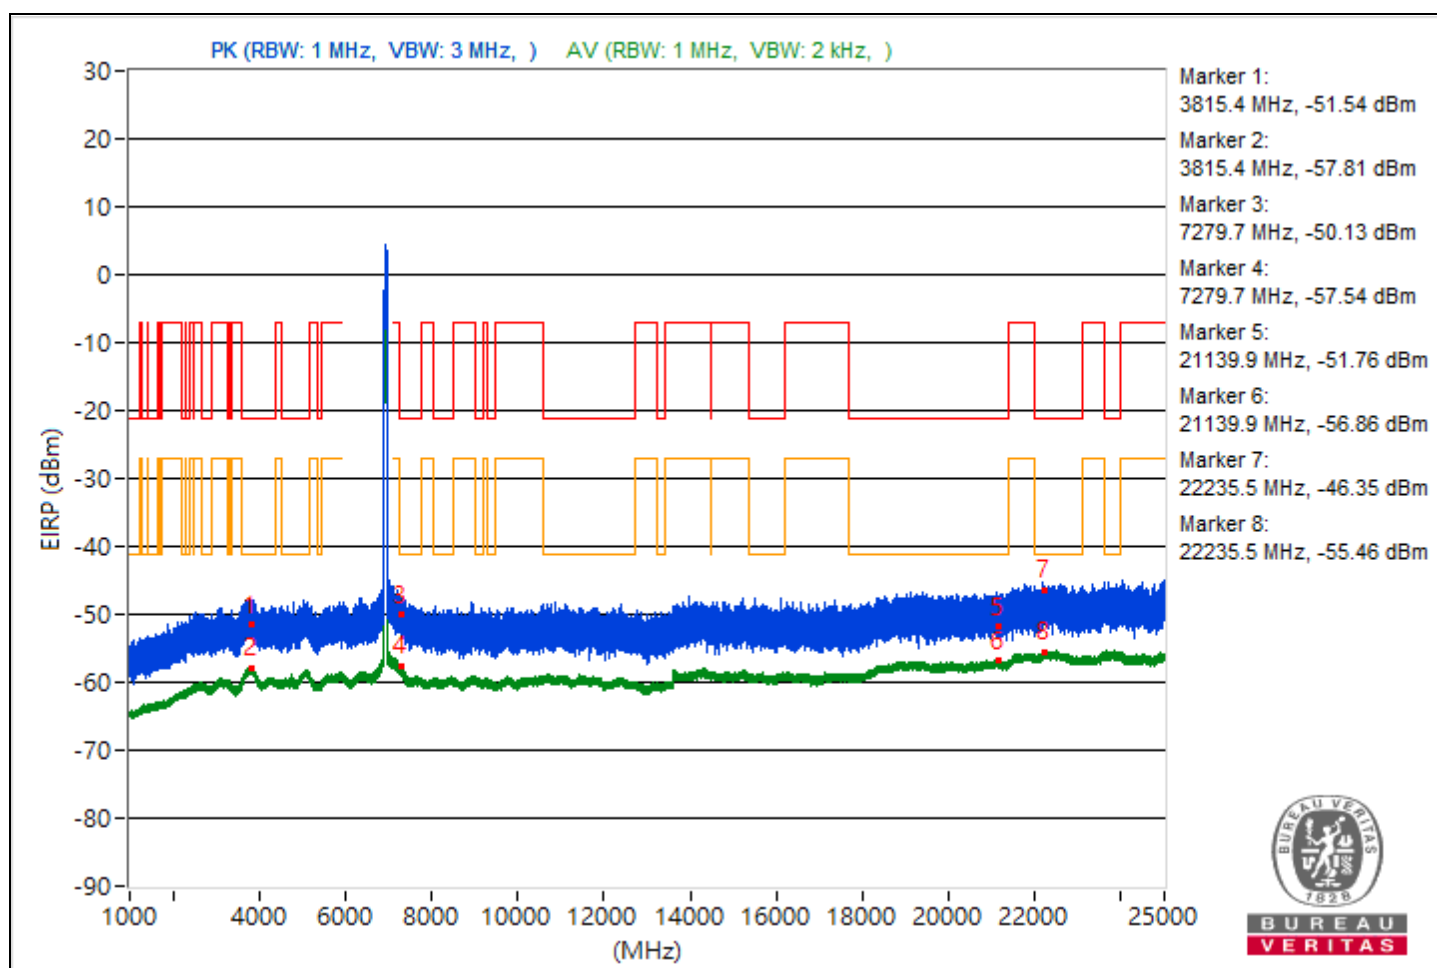


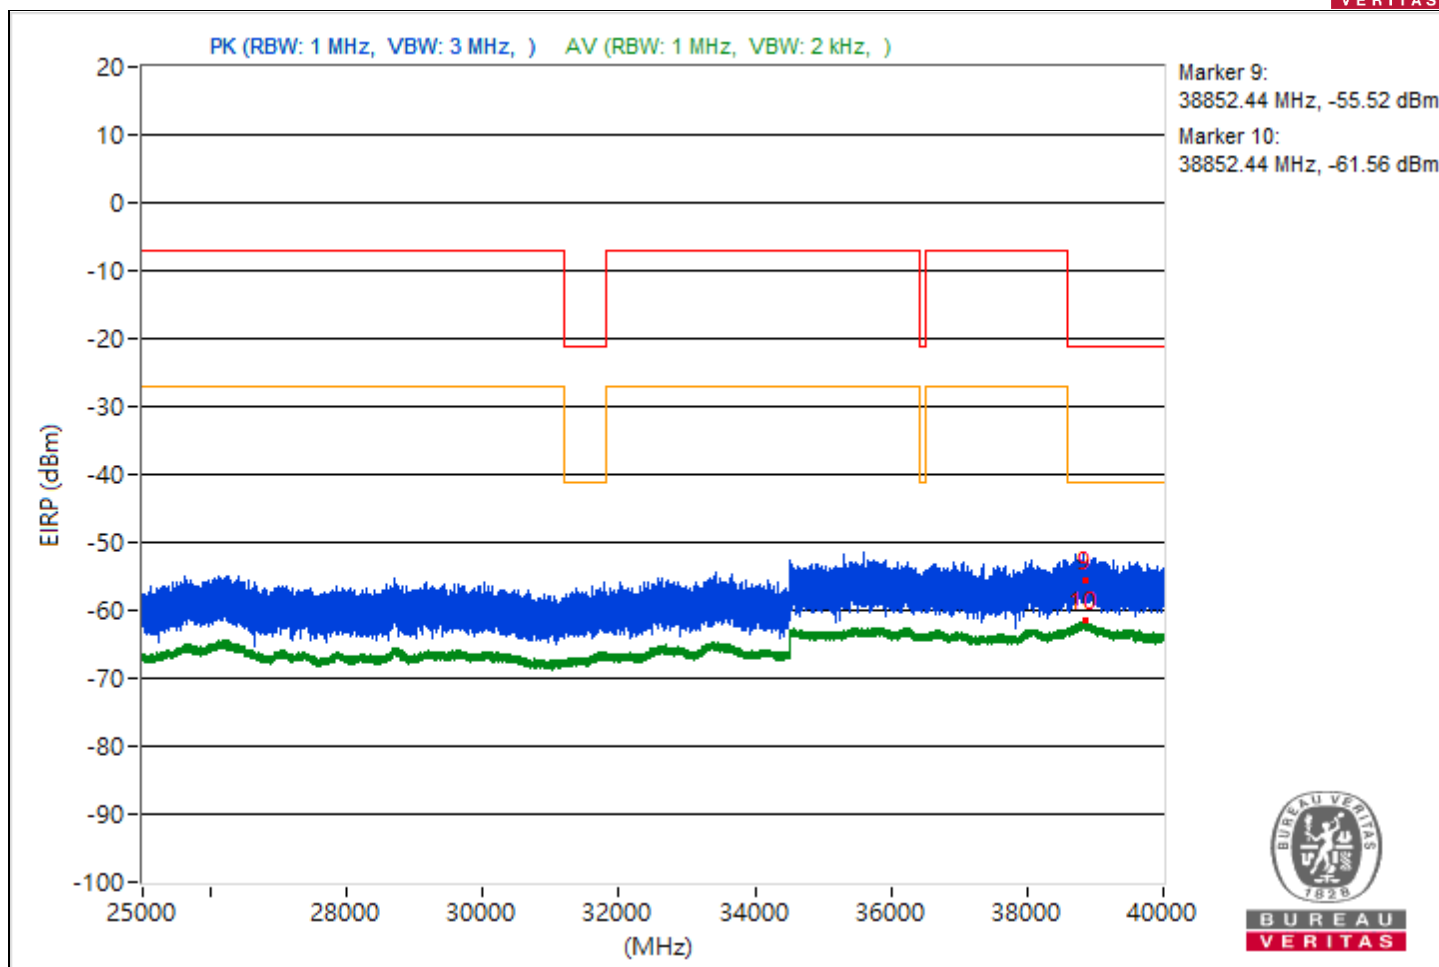


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3728.44	45.36 PK	74	-28.64	-56.54	-59.69	4.92	-49.9
2	3728.44	37.36 AV	54	-16.64	-65.31	-66.43	4.92	-57.9
3	7254.89	46.49 PK	74	-27.51	-56.25	-57.19	4.92	-48.77
4	7254.89	38.33 AV	54	-15.67	-65.06	-64.67	4.92	-56.93
5	21109.6	45.47 PK	74	-28.53	-57	-58.58	4.92	-49.79
6	21109.6	38.54 AV	54	-15.46	-65.07	-64.28	4.92	-56.72
7	23802.8	45.93 PK	74	-28.07	-58.63	-56.23	4.92	-49.33
8	23802.8	39.9 AV	54	-14.1	-62.98	-63.63	4.92	-55.36
9	38798.31	39.79 PK	74	-34.21	-62.16	-65.14	4.92	-55.47
10	38798.31	33.3 AV	54	-20.7	-69.48	-70.34	4.92	-61.96

Note: Margin value = Emission Level - Limit value

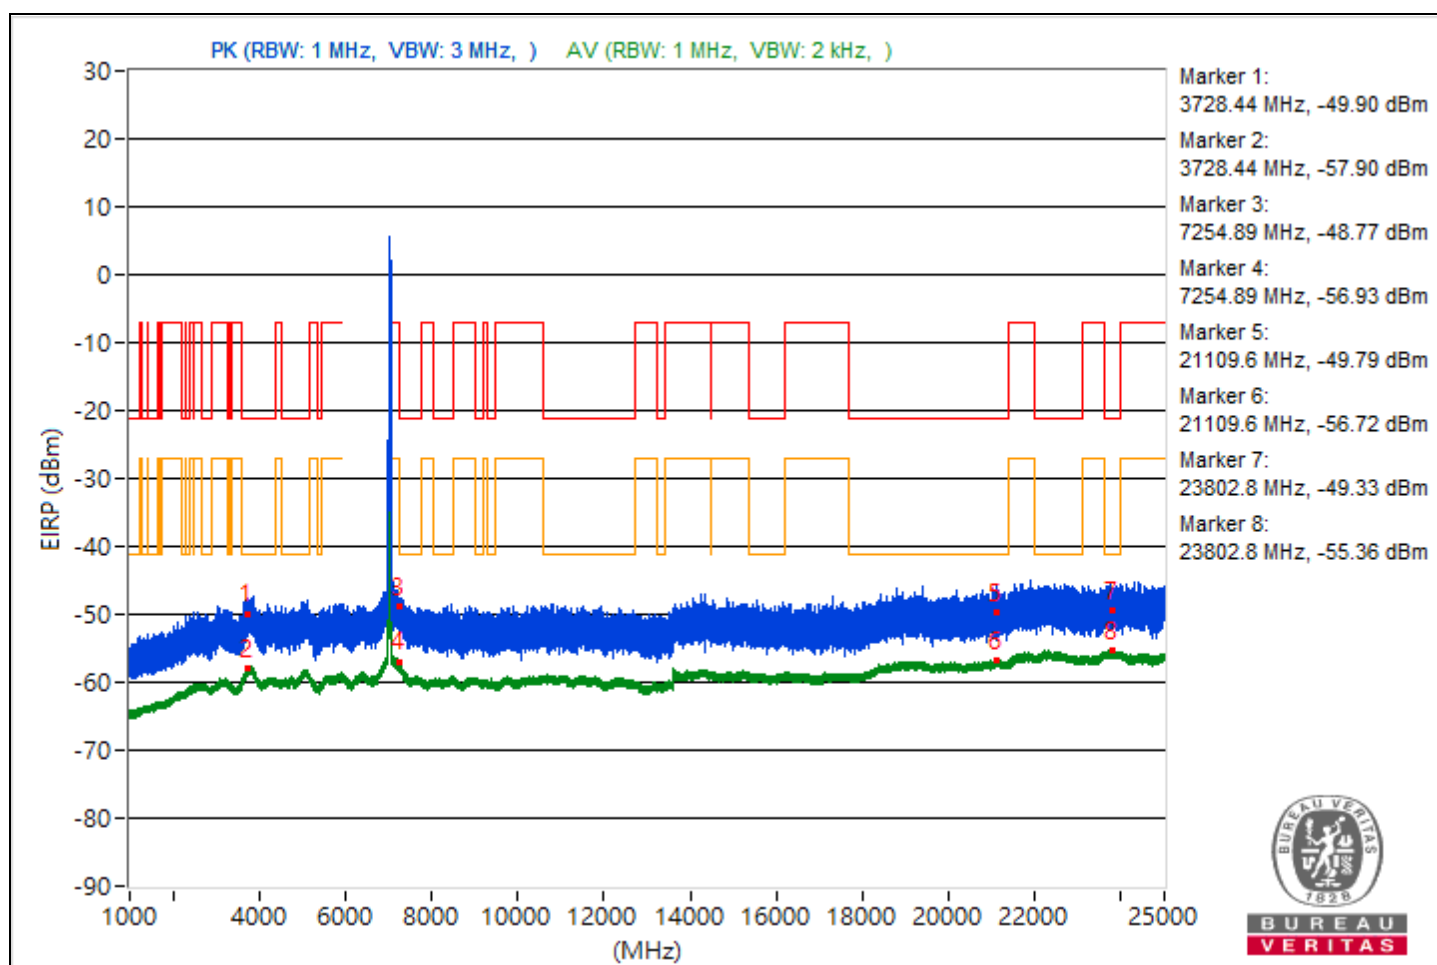


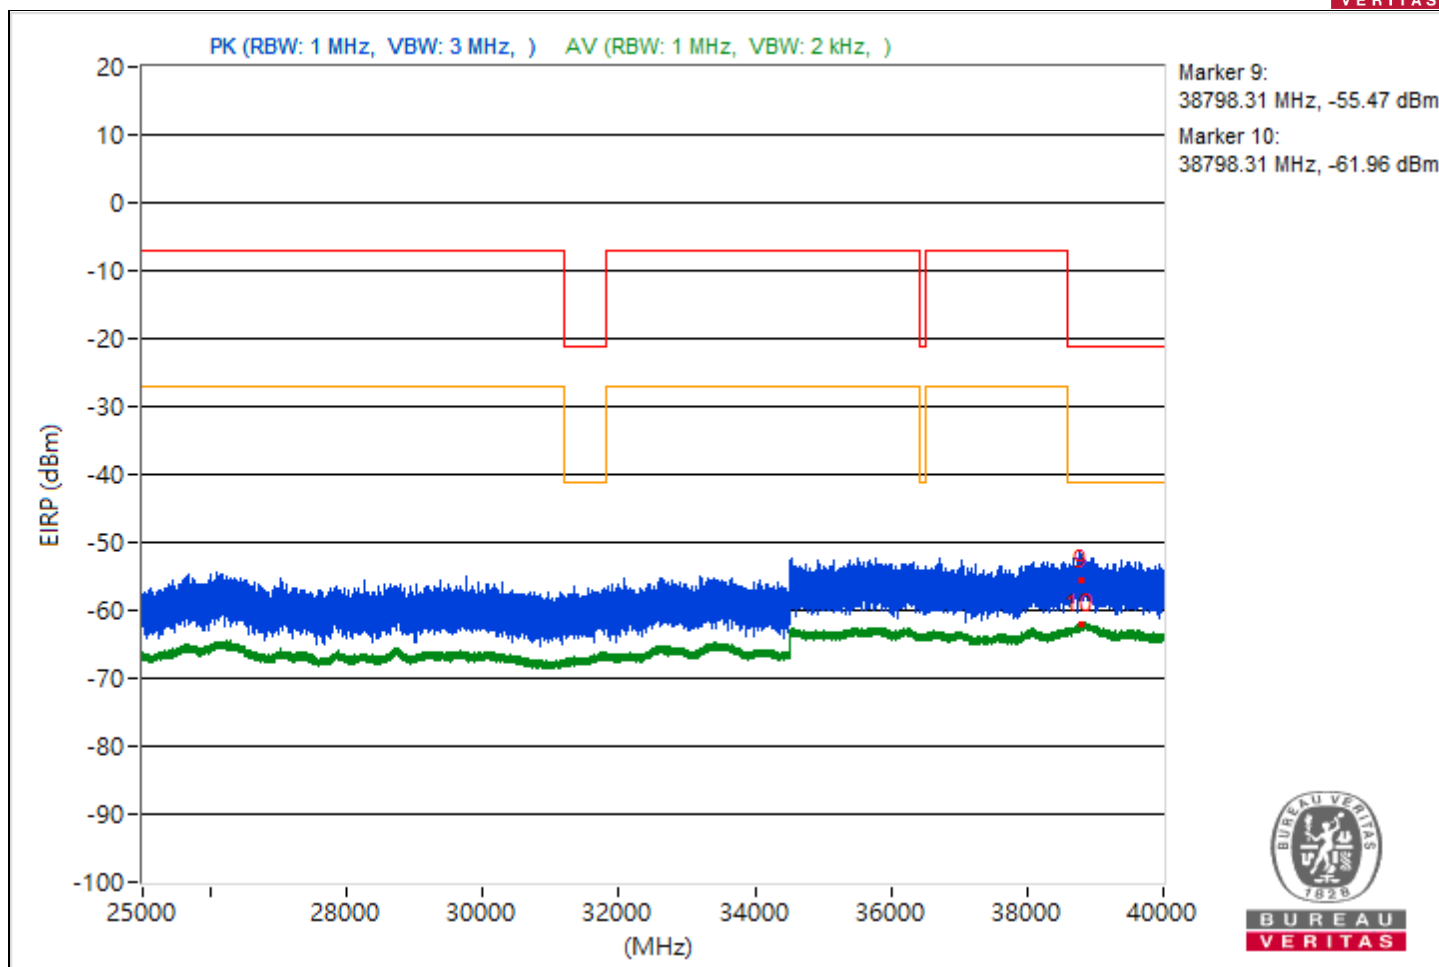


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3775.89	45.39 PK	74	-28.61	-57.93	-57.67	4.92	-49.87
2	3775.89	37.6 AV	54	-16.4	-66	-65.21	4.92	-57.66
3	8033.42	48.41 PK	74	-25.59	-52.28	-61.31	4.92	-46.85
4	8033.42	45.26 AV	54	-8.74	-55.14	-67.88	4.92	-50
5	21395.5	44.8 PK	74	-29.2	-57.33	-59.8	4.92	-50.46
6	21395.5	38.71 AV	54	-15.29	-64.3	-64.67	4.92	-56.55
7	22244.9	47.07 PK	74	-26.93	-57.16	-55.29	4.92	-48.19
8	22244.9	39.89 AV	54	-14.11	-63.69	-62.95	4.92	-55.37
9	38770.93	43.14 PK	74	-30.86	-62.08	-58.67	4.92	-52.12
10	38770.93	32.98 AV	54	-21.02	-69.7	-70.79	4.92	-62.28

Note: Margin value = Emission Level - Limit value

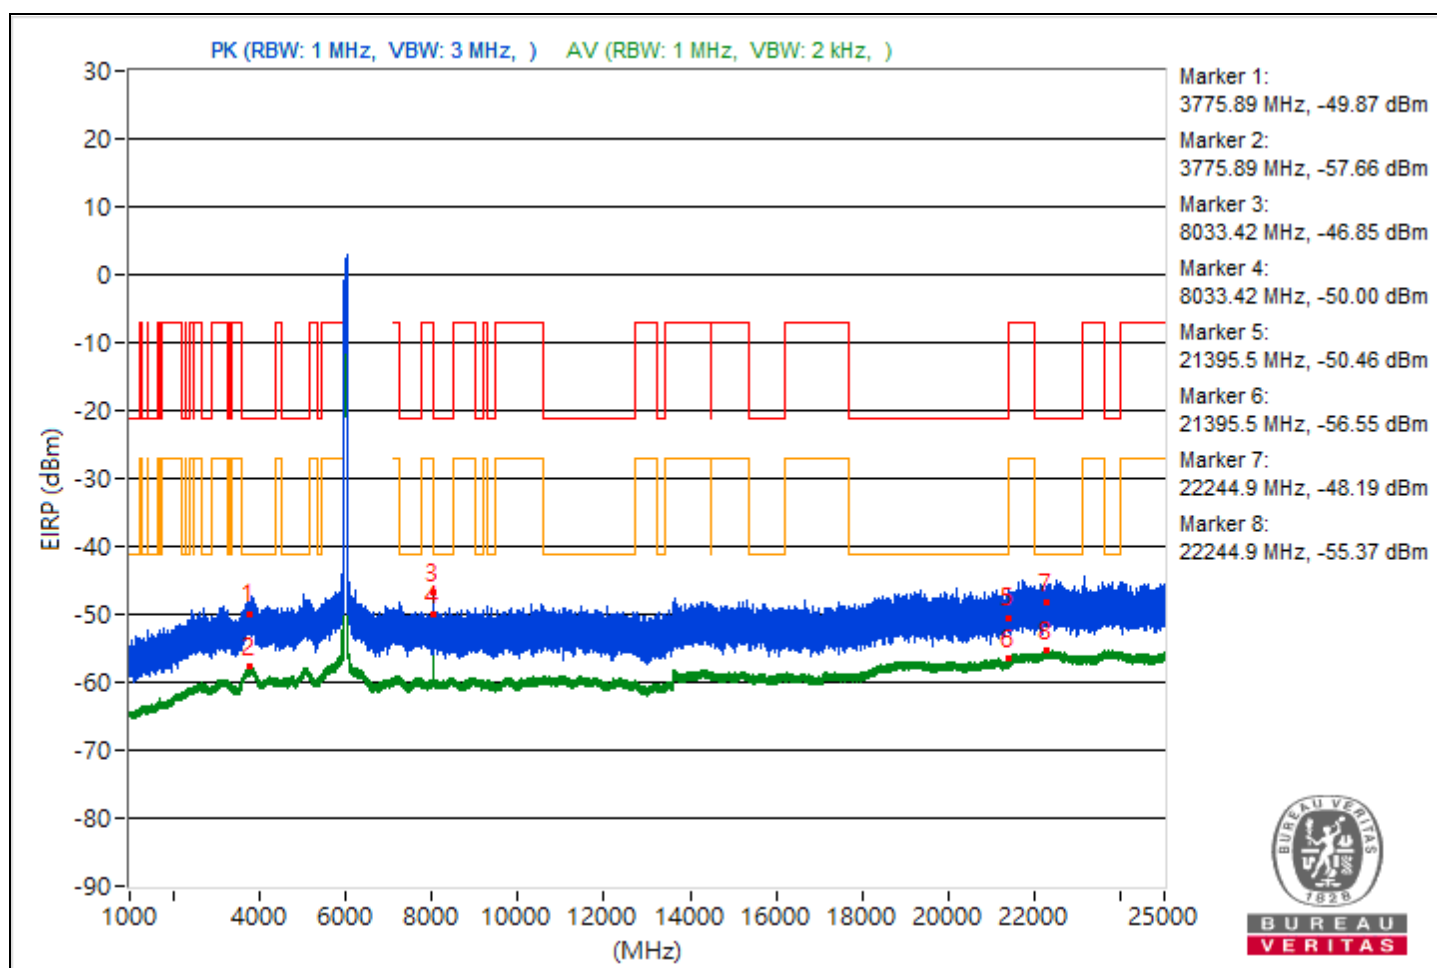


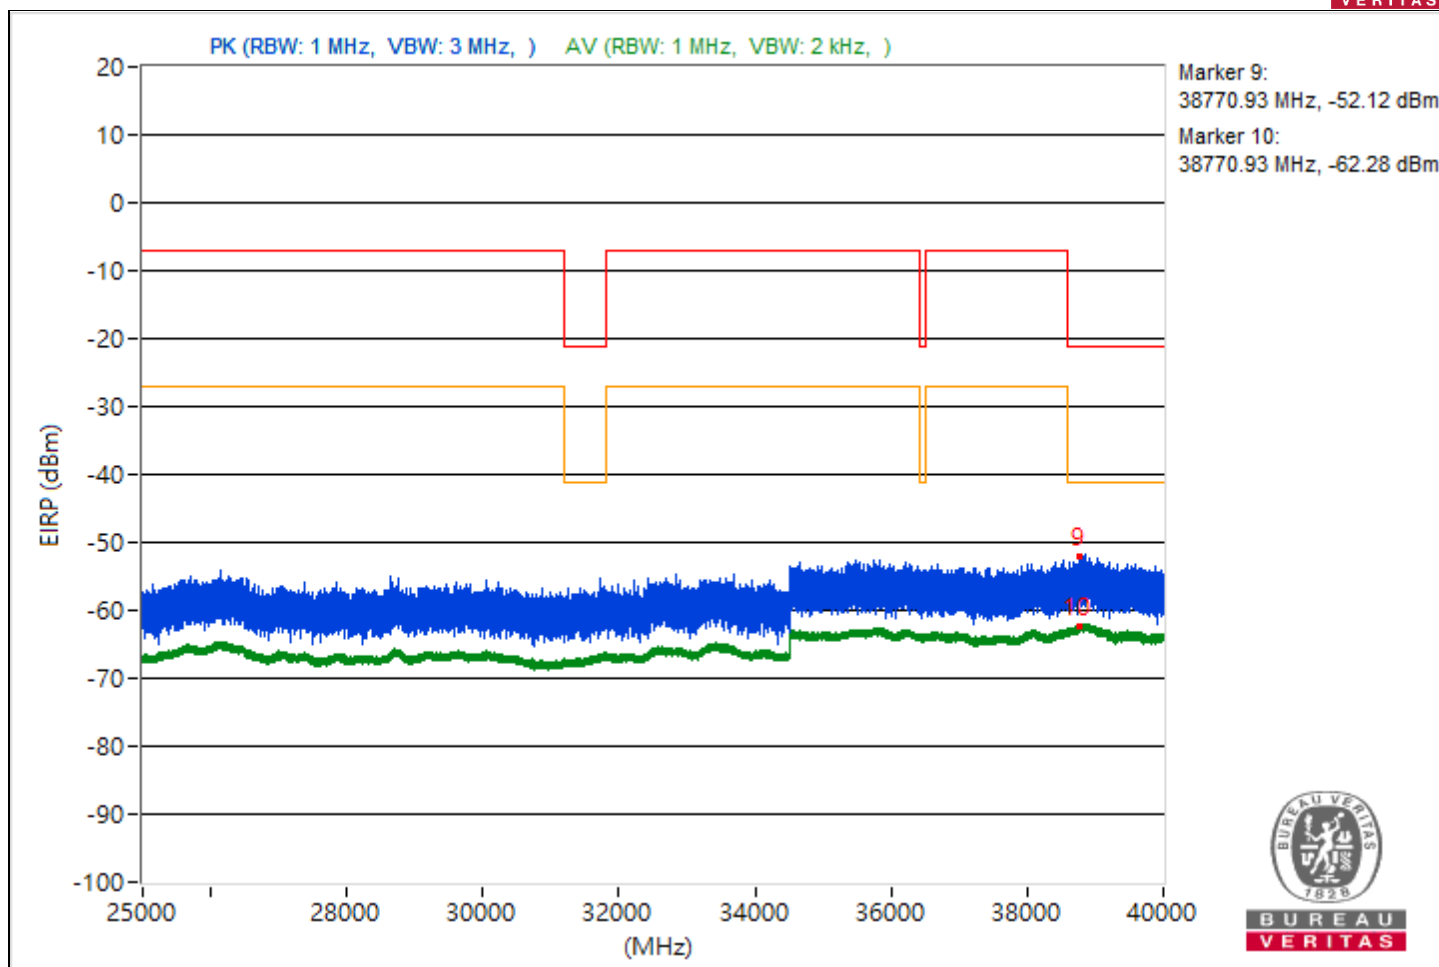


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.68	47.1 PK	74	-26.9	-55.32	-57.02	4.92	-48.16
2	3798.68	37.65 AV	54	-16.35	-65.04	-66.11	4.92	-57.61
3	8459.91	47.61 PK	74	-26.39	-54.34	-57.32	4.92	-47.65
4	8459.91	41.23 AV	54	-12.77	-59.72	-66.83	4.92	-54.03
5	21152.5	44.19 PK	74	-29.81	-60.02	-58.18	4.92	-51.07
6	21152.5	38.52 AV	54	-15.48	-65.06	-64.31	4.92	-56.74
7	22477.8	46.2 PK	74	-27.8	-56.32	-57.79	4.92	-49.06
8	22477.8	39.89 AV	54	-14.11	-63.8	-62.86	4.92	-55.37
9	38821.33	40.03 PK	74	-33.97	-61.48	-65.92	4.92	-55.23
10	38821.33	33.49 AV	54	-20.51	-69.25	-70.2	4.92	-61.77

Note: Margin value = Emission Level - Limit value

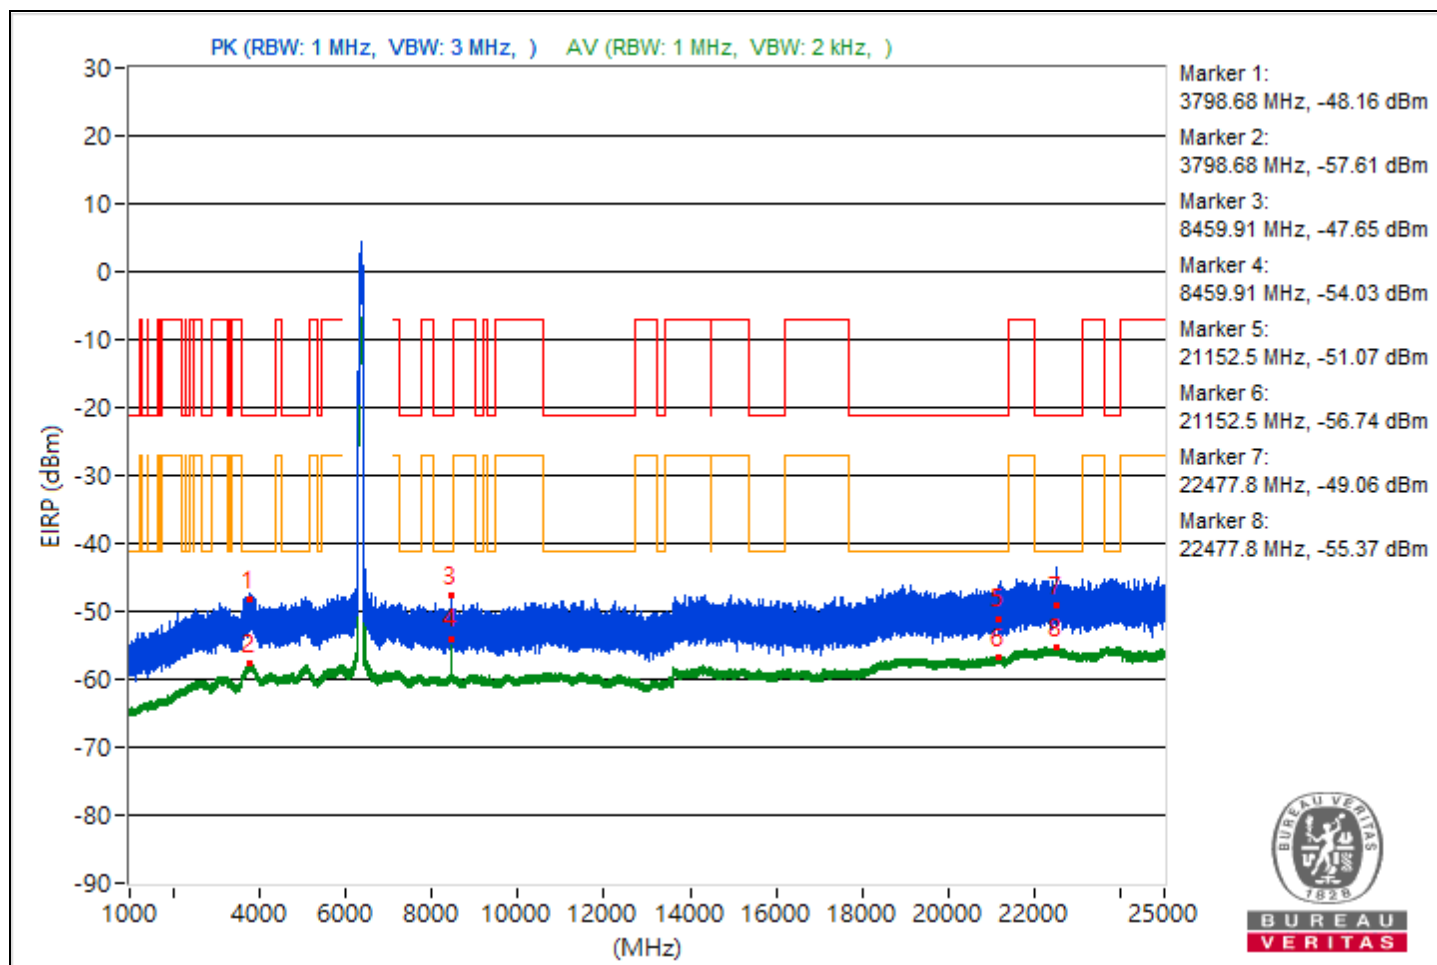


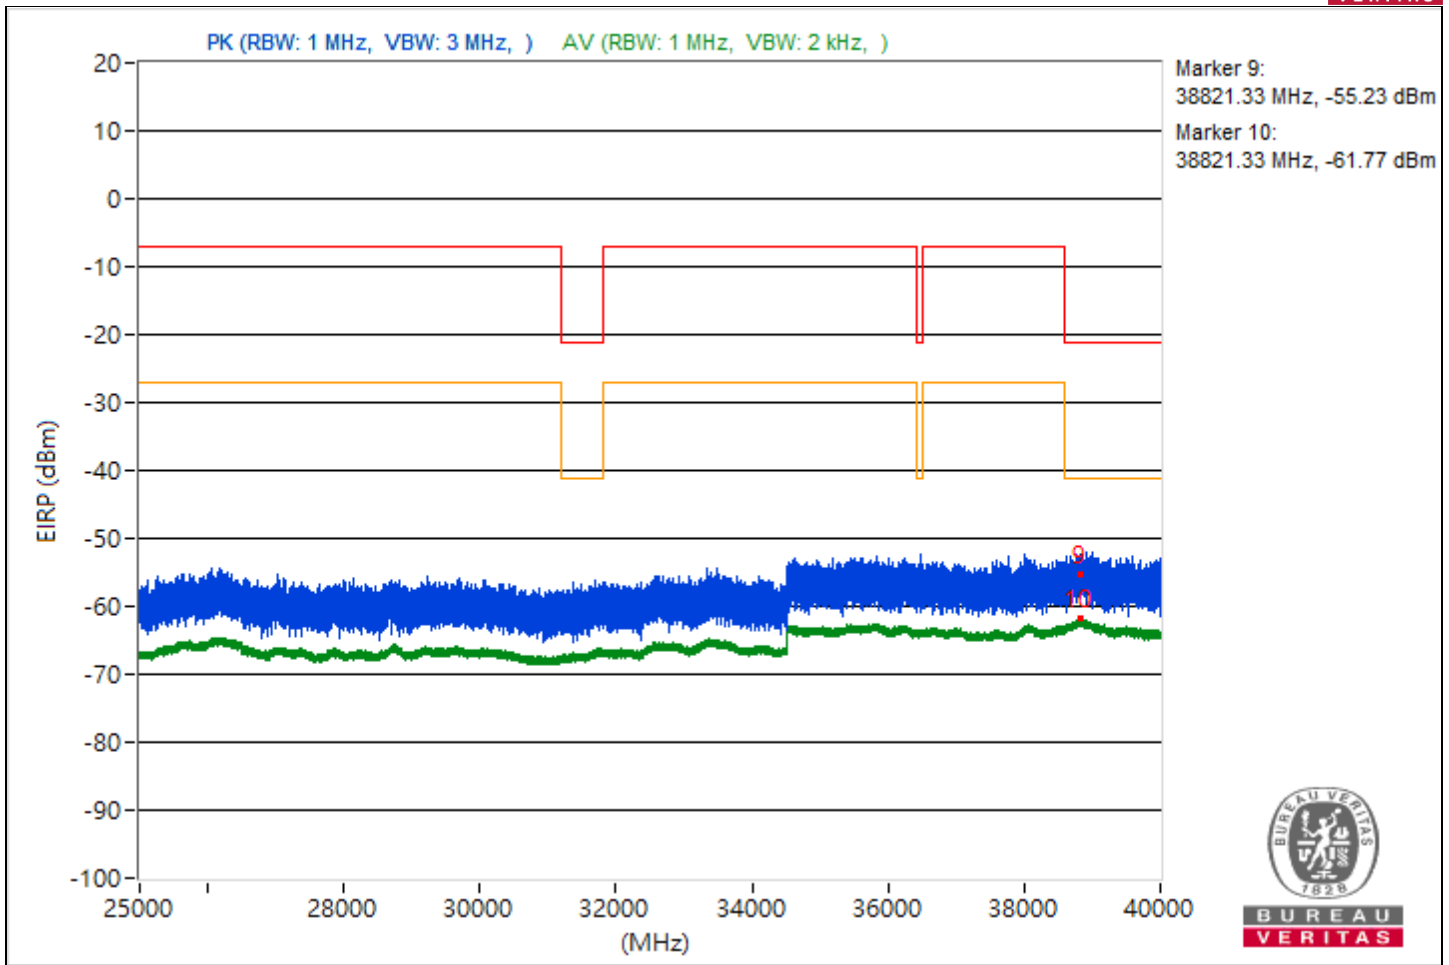


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3818.98	44.22 PK	74	-29.78	-59.24	-58.71	4.92	-51.04
2	3818.98	37.78 AV	54	-16.22	-65.18	-65.65	4.92	-57.48
3	14479.82	43.79 PK	74	-30.21	-59.15	-59.65	4.92	-51.47
4	14479.82	36.7 AV	54	-17.3	-66.12	-66.9	4.92	-58.56
5	21130.6	44.25 PK	74	-29.75	-60.04	-58.06	4.92	-51.01
6	21130.6	38.59 AV	54	-15.41	-64.97	-64.27	4.92	-56.67
7	22220.4	45.83 PK	74	-28.17	-57.15	-57.58	4.92	-49.43
8	22220.4	39.9 AV	54	-14.1	-62.99	-63.62	4.92	-55.36
9	38880.71	39.45 PK	74	-34.55	-63.04	-64.58	4.92	-55.81
10	38880.71	33.05 AV	54	-20.95	-70.92	-69.47	4.92	-62.21

Note: Margin value = Emission Level - Limit value

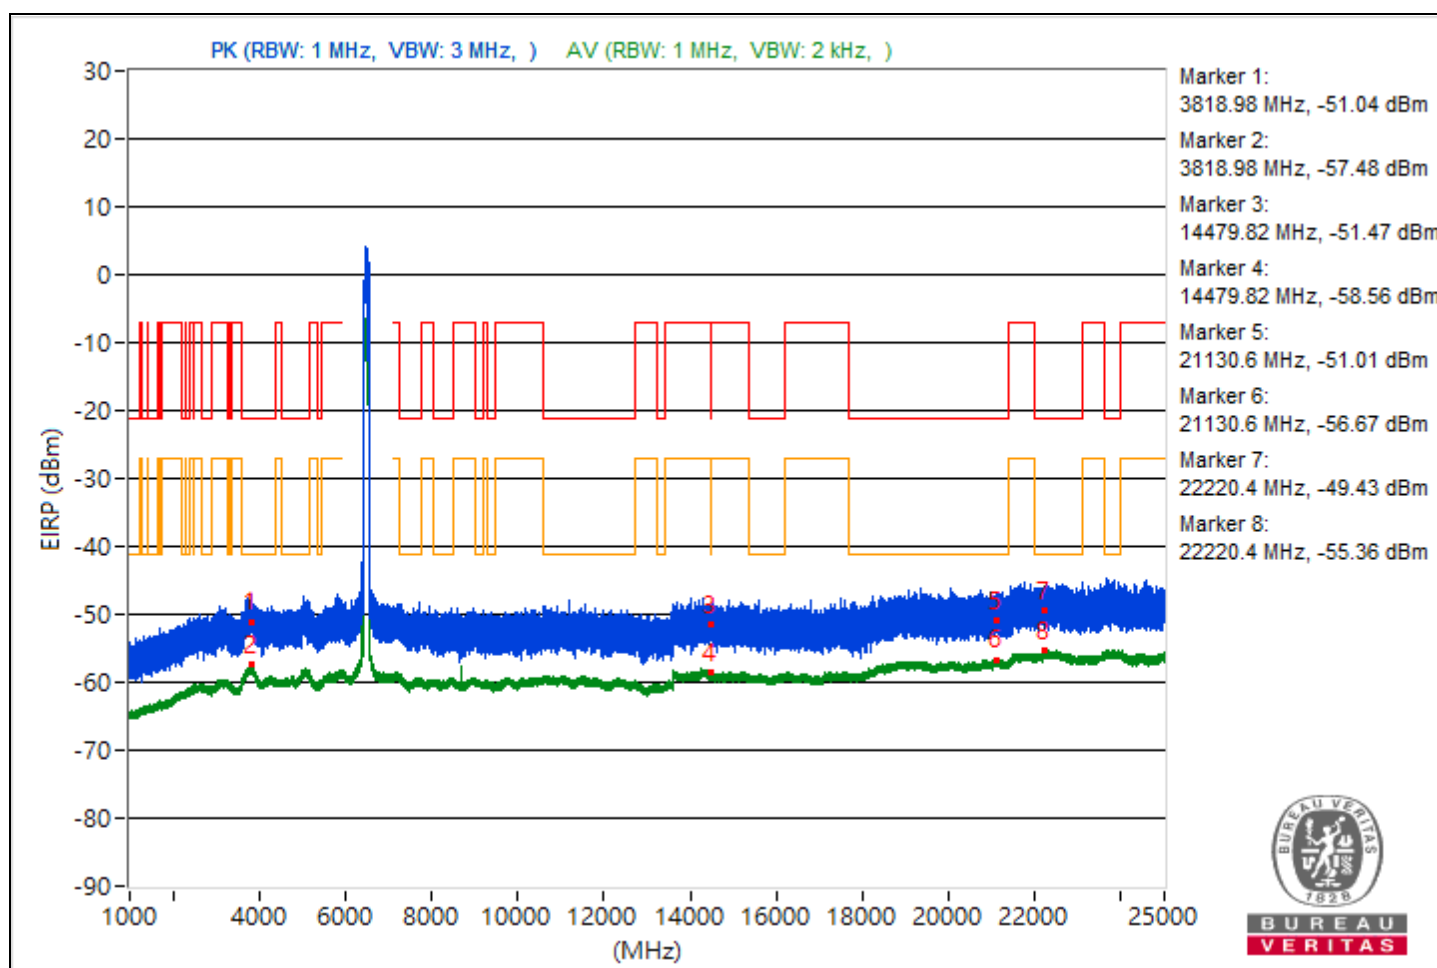


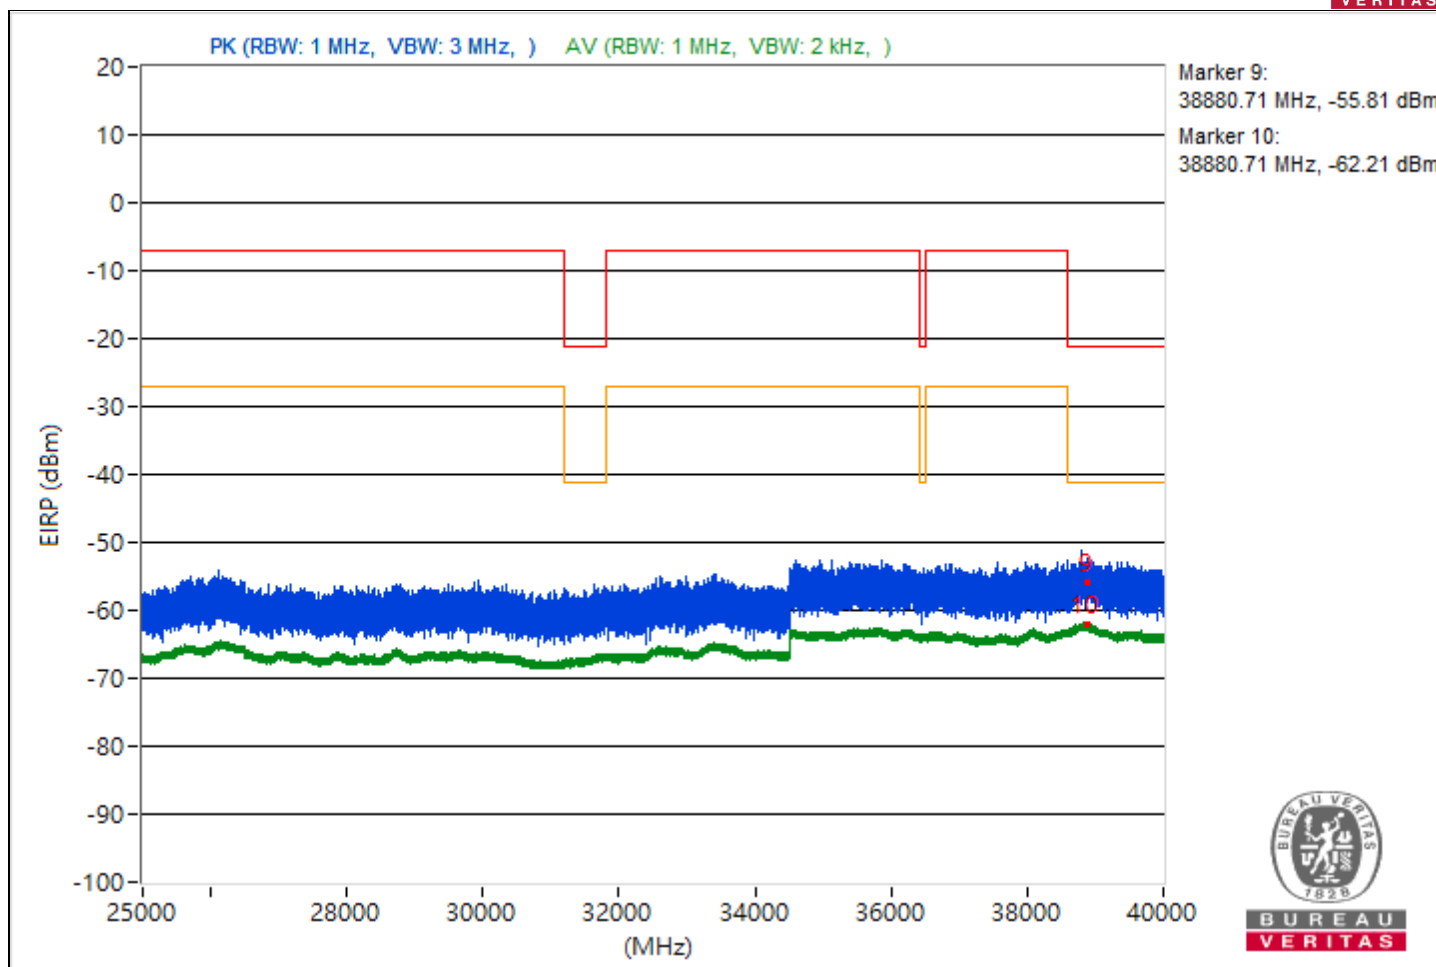


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3823.57	46.31 PK	74	-27.69	-55.79	-58.34	4.92	-48.95
2	3823.57	37.59 AV	54	-16.41	-65.98	-65.25	4.92	-57.67
3	14491.02	44.24 PK	74	-29.76	-57.45	-61.27	4.92	-51.02
4	14491.02	36.66 AV	54	-17.34	-66.22	-66.86	4.92	-58.6
5	21162.6	44.57 PK	74	-29.43	-57.8	-59.62	4.92	-50.69
6	21162.6	38.5 AV	54	-15.5	-65.12	-64.29	4.92	-56.76
7	22271.5	47.28 PK	74	-26.72	-56.87	-55.13	4.92	-47.98
8	22271.5	39.98 AV	54	-14.02	-62.77	-63.69	4.92	-55.28
9	38828	38.11 PK	74	-35.89	-65.42	-64.77	4.92	-57.15
10	38828	33.22 AV	54	-20.78	-69.52	-70.48	4.92	-62.04

Note: Margin value = Emission Level - Limit value

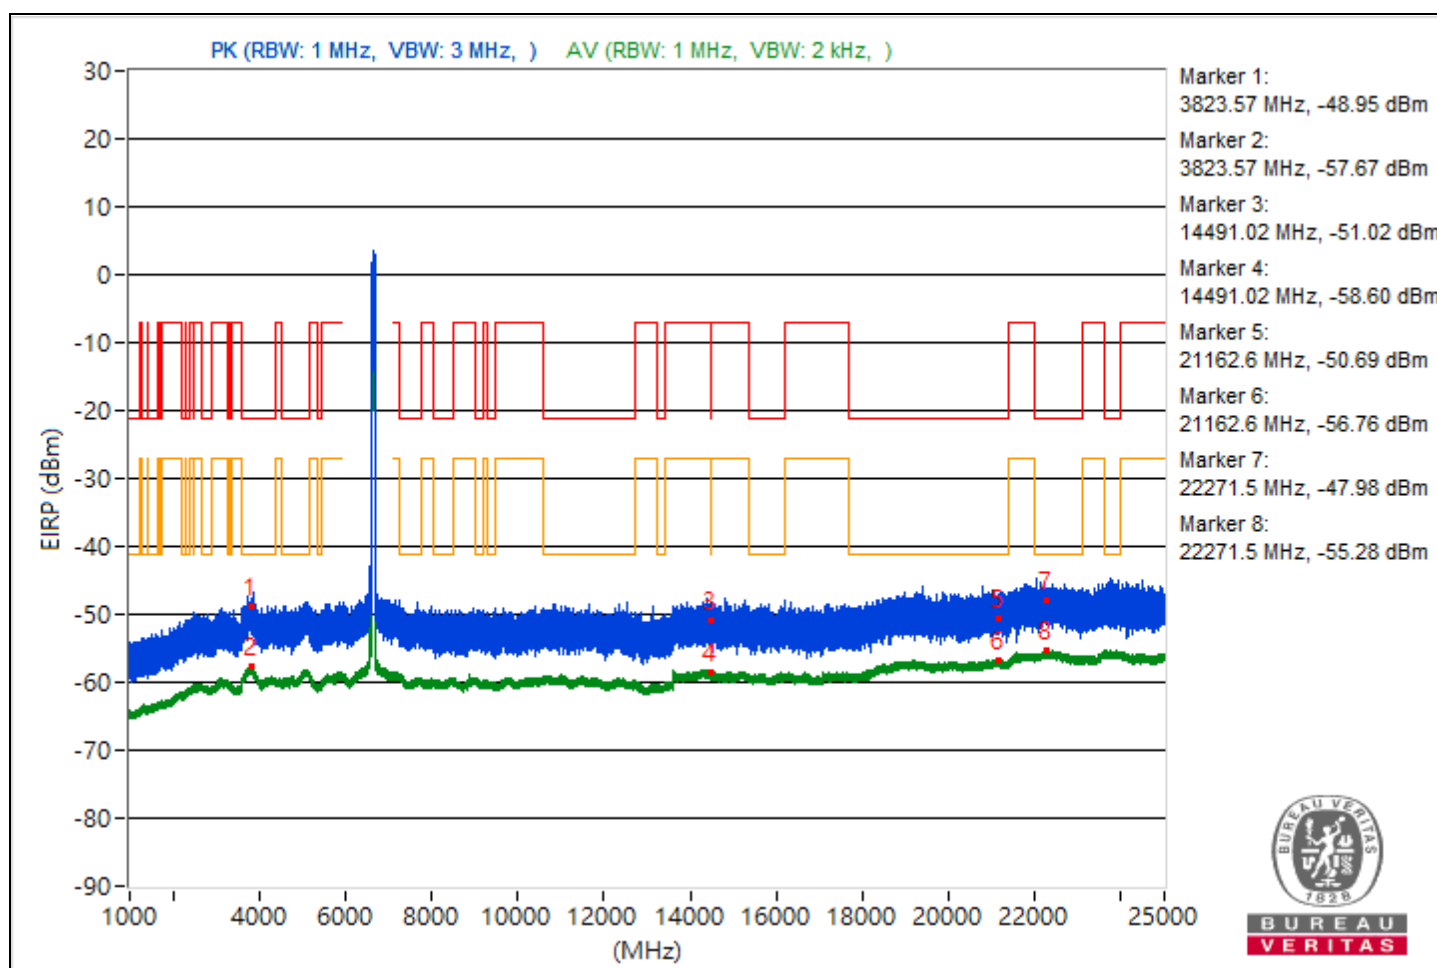


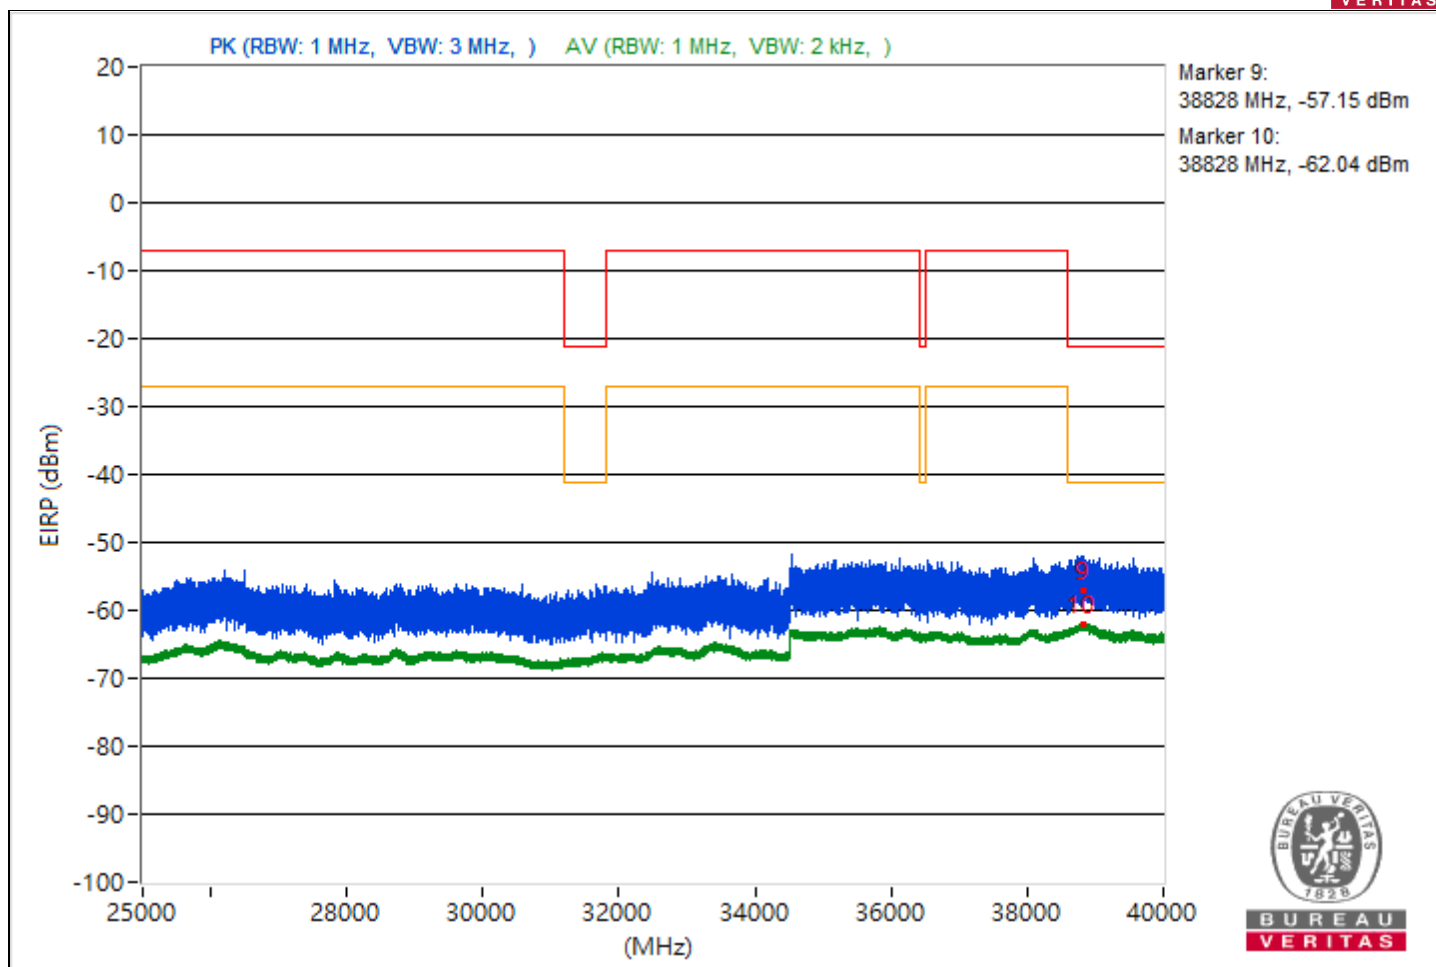


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3843.09	44.94 PK	74	-29.06	-57.76	-58.8	4.92	-50.32
2	3843.09	37.48 AV	54	-16.52	-66.15	-65.3	4.92	-57.78
3	7257.07	44.12 PK	74	-29.88	-58.68	-59.5	4.92	-51.14
4	7257.07	37.38 AV	54	-16.62	-65.61	-66.02	4.92	-57.88
5	21128	45.4 PK	74	-28.6	-57.21	-58.45	4.92	-49.86
6	21128	38.55 AV	54	-15.45	-64.98	-64.33	4.92	-56.71
7	22251.6	46.66 PK	74	-27.34	-57.46	-55.77	4.92	-48.6
8	22251.6	40.01 AV	54	-13.99	-63.65	-62.77	4.92	-55.25
9	38838.4	41.68 PK	74	-32.32	-62.7	-60.58	4.92	-53.58
10	38838.4	33.48 AV	54	-20.52	-69.42	-70.03	4.92	-61.78

Note: Margin value = Emission Level - Limit value

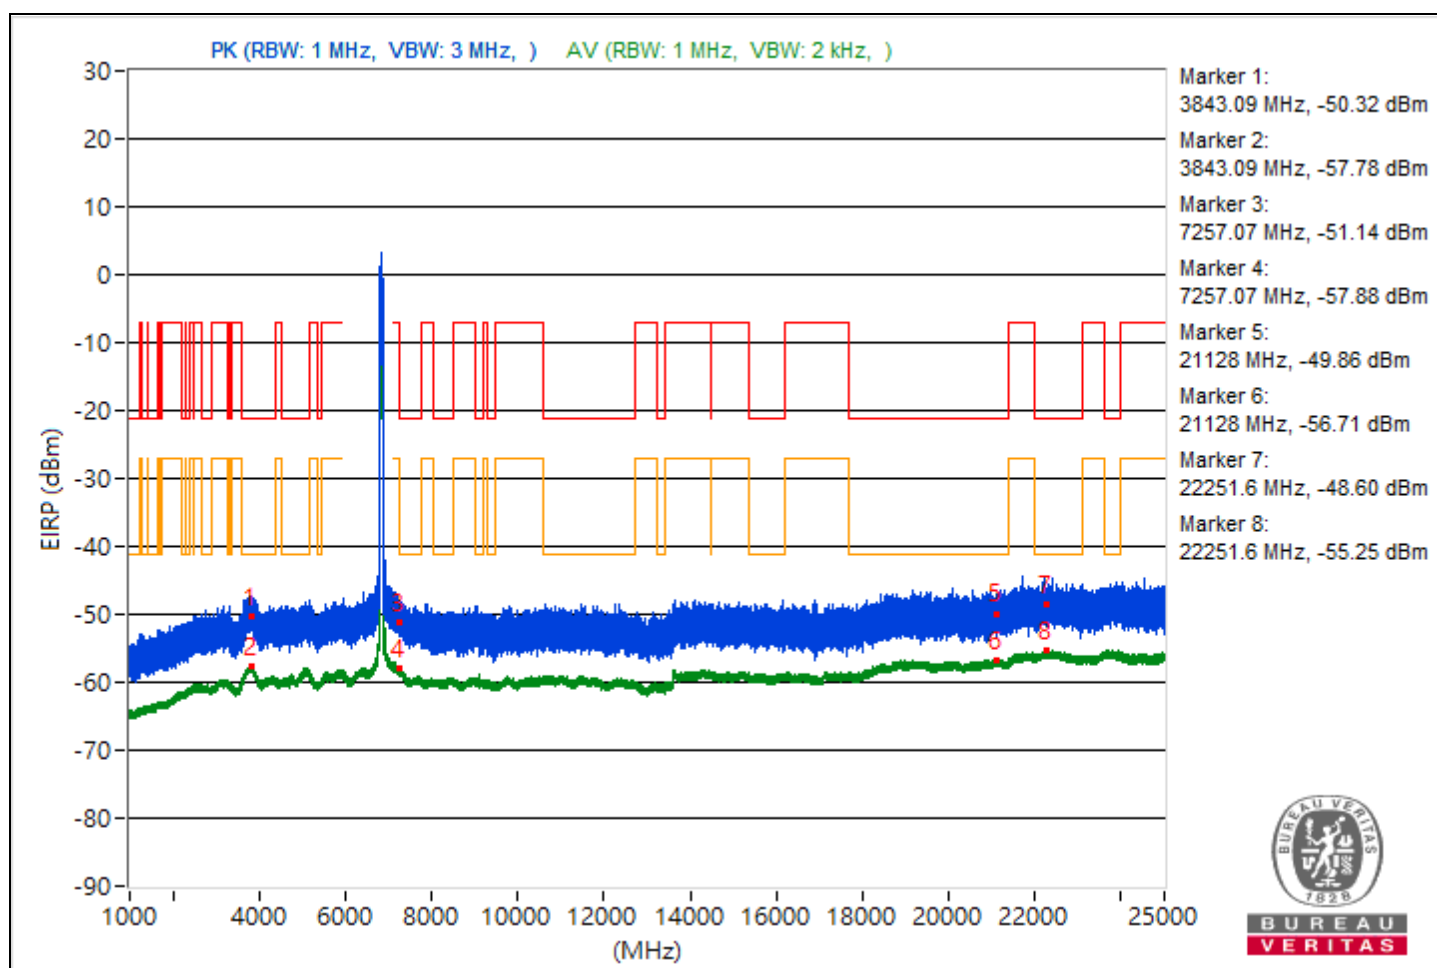


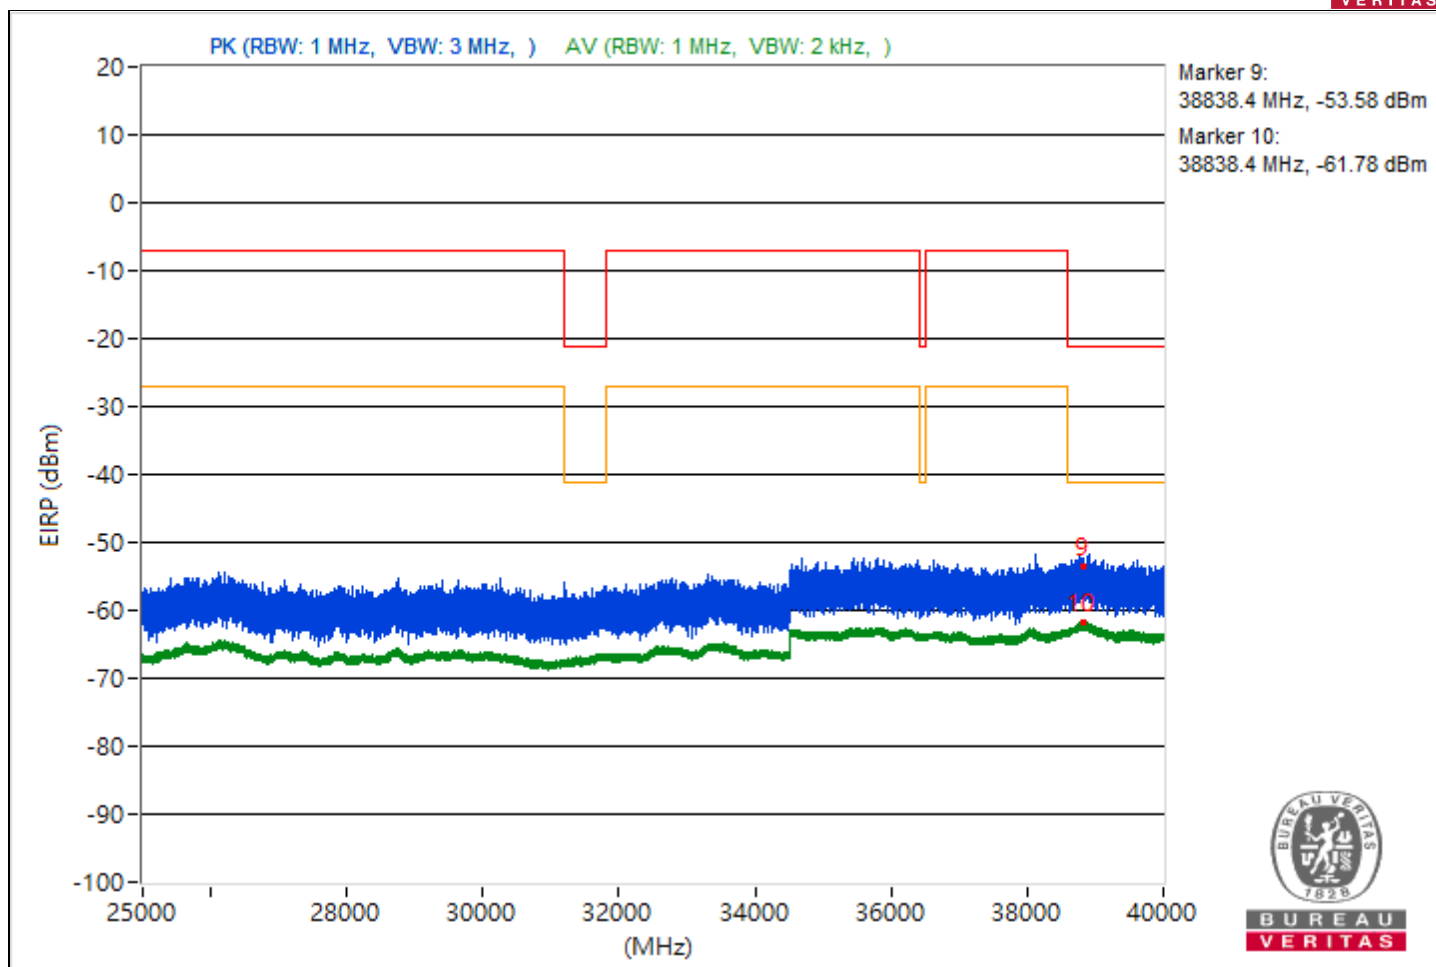


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3772.78	45.32 PK	74	-28.68	-57.46	-58.32	4.92	-49.94
2	3772.78	37.65 AV	54	-16.35	-64.96	-66.2	4.92	-57.61
3	7250.07	44.58 PK	74	-29.42	-58.34	-58.9	4.92	-50.68
4	7250.07	37.12 AV	54	-16.88	-65.62	-66.57	4.92	-58.14
5	21053.3	41.79 PK	74	-32.21	-61.01	-61.82	4.92	-53.47
6	21053.3	38.81 AV	54	-15.19	-64.51	-64.26	4.92	-56.45
7	23789.7	44.78 PK	74	-29.22	-60.3	-57.1	4.92	-50.48
8	23789.7	39.85 AV	54	-14.15	-63.83	-62.91	4.92	-55.41
9	38834.4	39.15 PK	74	-34.85	-63.93	-64.14	4.92	-56.11
10	38834.4	33.36 AV	54	-20.64	-69.6	-70.08	4.92	-61.9

Note: Margin value = Emission Level - Limit value

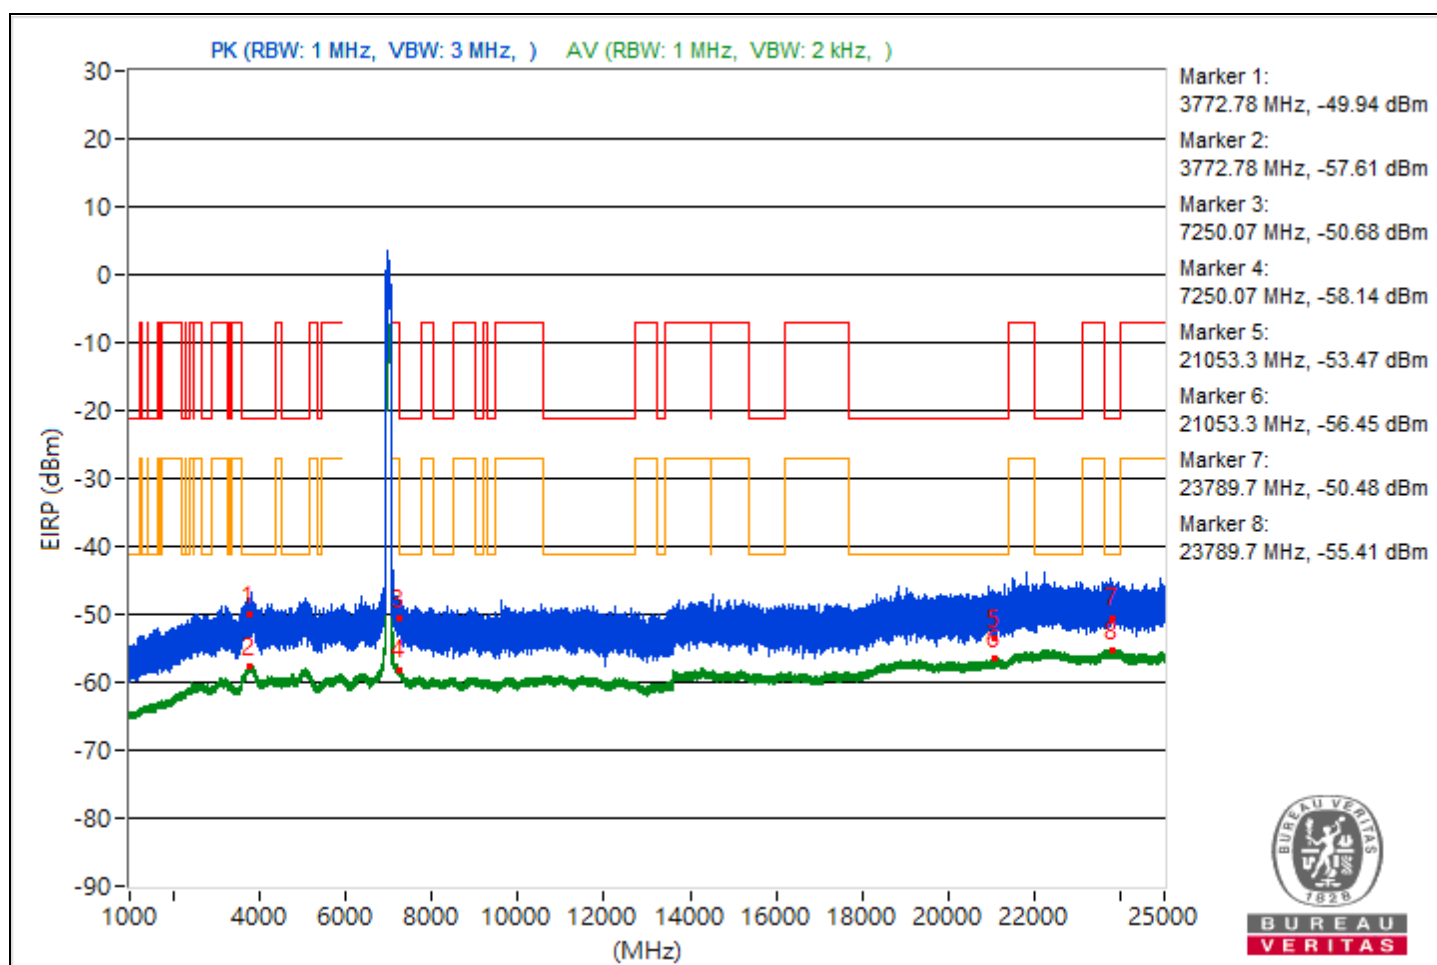


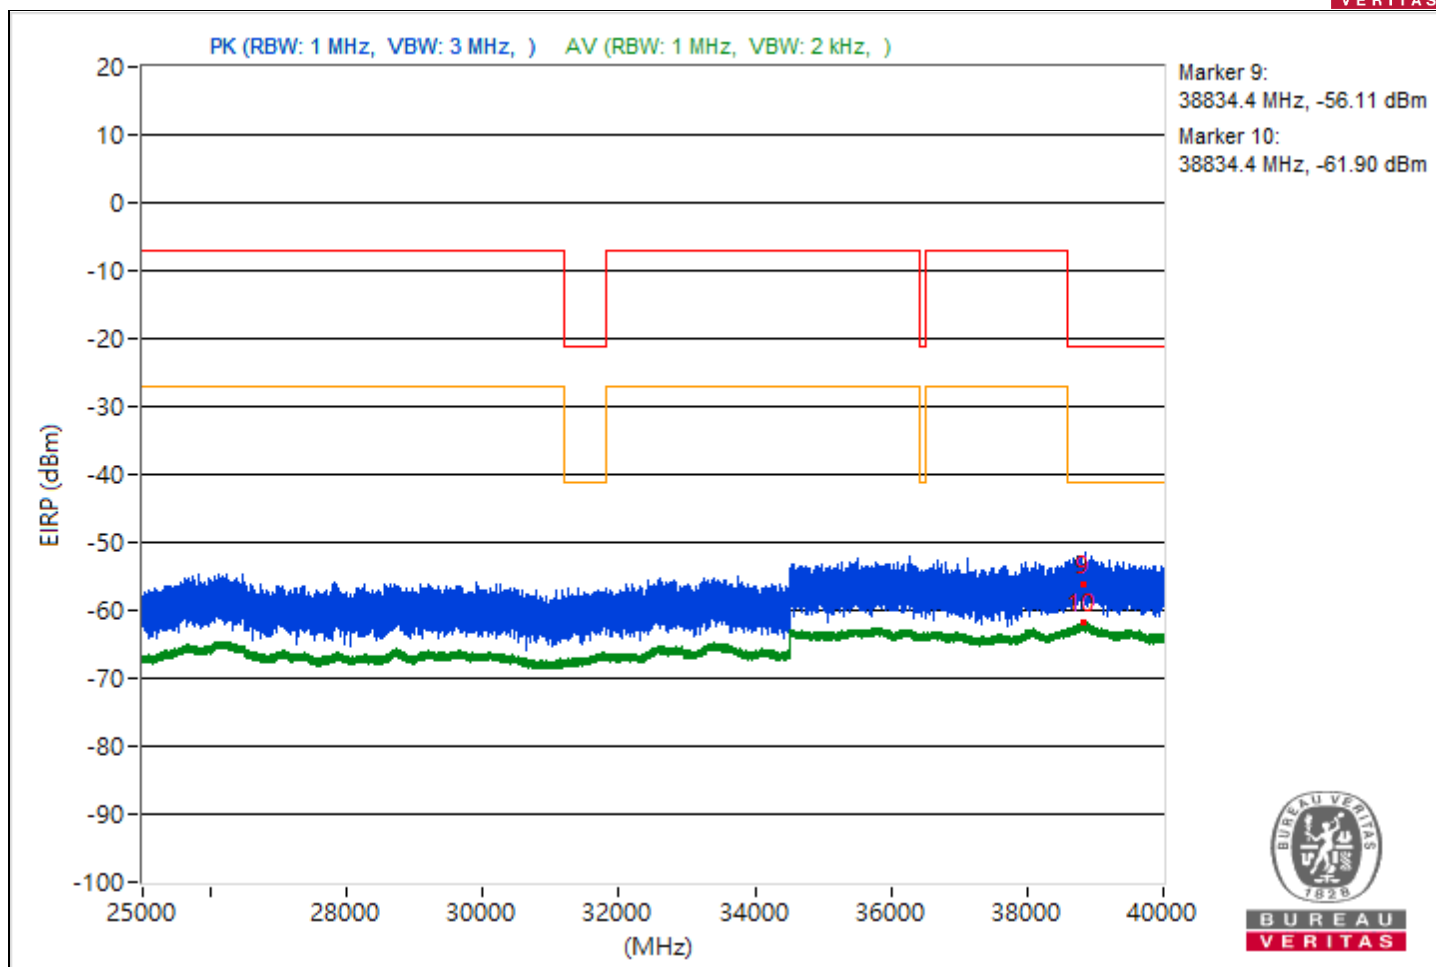


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3827.53	44.27 PK	74	-29.73	-58.08	-59.95	4.92	-50.99
2	3827.53	37.48 AV	54	-16.52	-65.1	-66.43	4.92	-57.78
3	8033.33	48.75 PK	74	-25.25	-51.83	-61.99	4.92	-46.51
4	8033.33	45.44 AV	54	-8.56	-54.98	-67.49	4.92	-49.82
5	21068.8	46.18 PK	74	-27.82	-56.1	-58.18	4.92	-49.08
6	21068.8	38.7 AV	54	-15.3	-64.65	-64.34	4.92	-56.56
7	22231.4	47.17 PK	74	-26.83	-56.9	-55.29	4.92	-48.09
8	22231.4	39.94 AV	54	-14.06	-62.86	-63.68	4.92	-55.32
9	38851.47	39.43 PK	74	-34.57	-64.2	-63.35	4.92	-55.83
10	38851.47	33.34 AV	54	-20.66	-69.49	-70.25	4.92	-61.92

Note: Margin value = Emission Level - Limit value

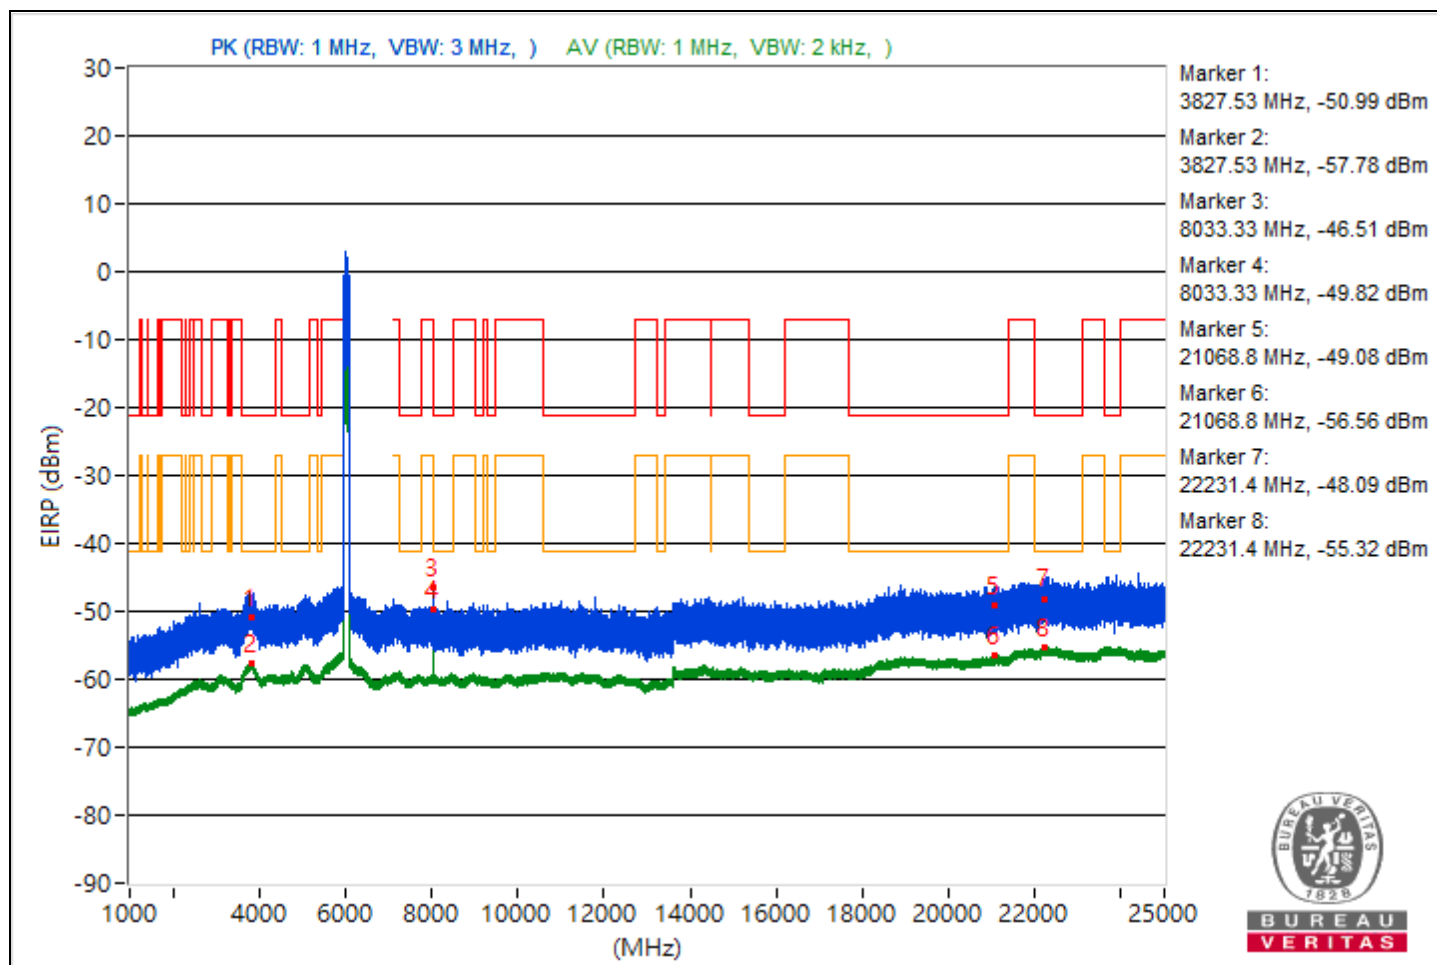


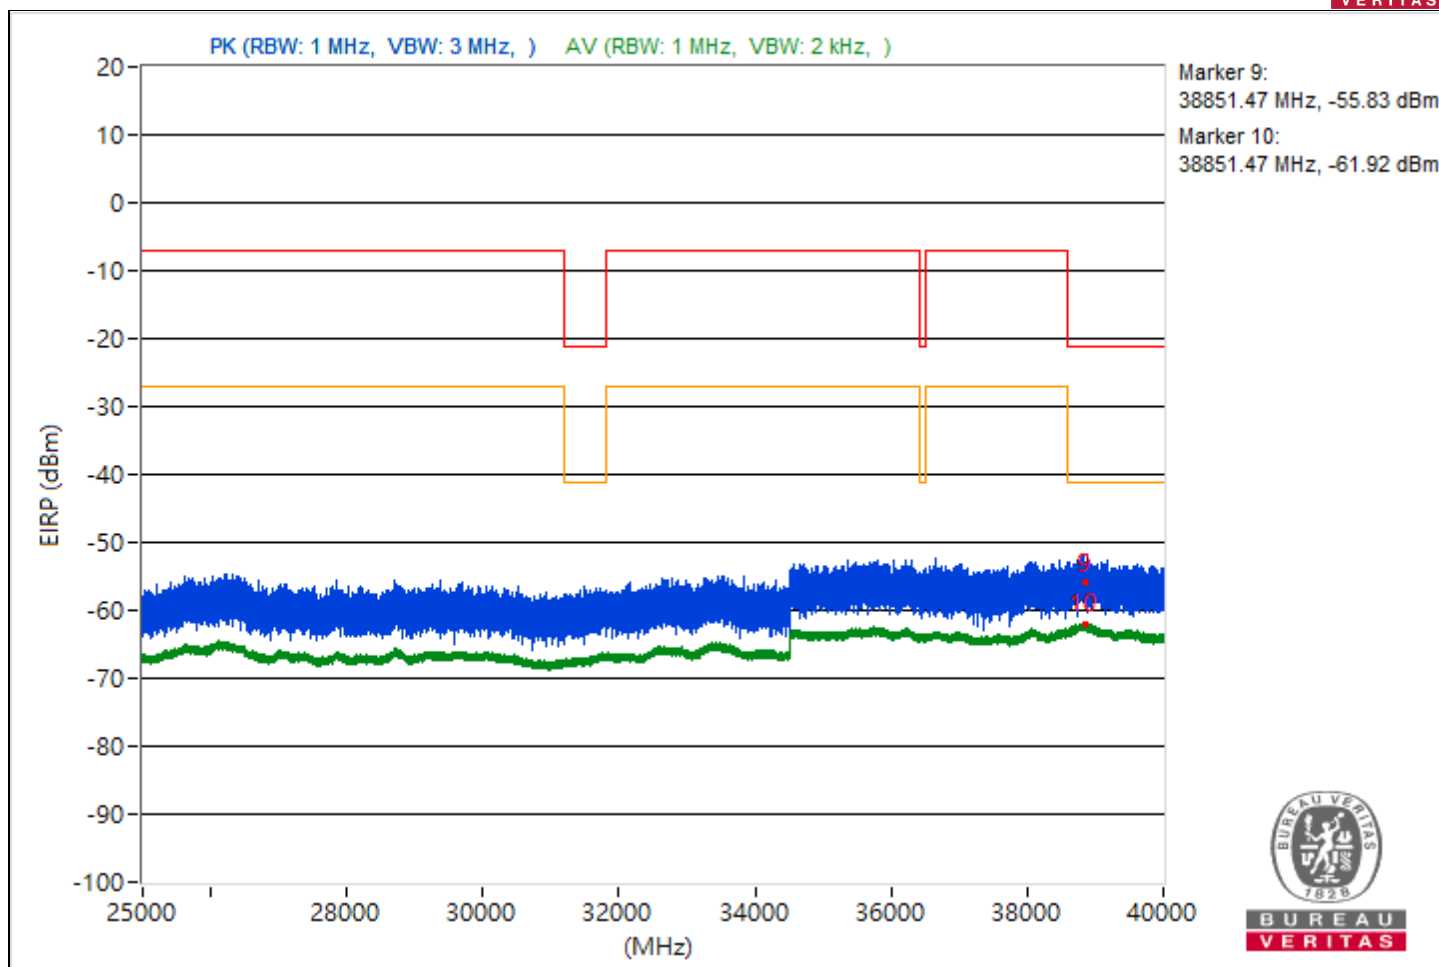


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3819.29	43.92 PK	74	-30.08	-58.17	-60.74	4.92	-51.34
2	3819.29	37.73 AV	54	-16.27	-66.09	-64.92	4.92	-57.53
3	8459.91	45.68 PK	74	-28.32	-56.22	-59.35	4.92	-49.58
4	8459.91	41.12 AV	54	-12.88	-59.87	-66.71	4.92	-54.14
5	21155	44.75 PK	74	-29.25	-60.58	-57.01	4.92	-50.51
6	21155	38.43 AV	54	-15.57	-65.51	-64.12	4.92	-56.83
7	22219	46.41 PK	74	-27.59	-56.34	-57.26	4.92	-48.85
8	22219	39.72 AV	54	-14.28	-64.14	-62.89	4.92	-55.54
9	38807.82	39.31 PK	74	-34.69	-65.08	-62.94	4.92	-55.95
10	38807.82	33.71 AV	54	-20.29	-68.99	-70.03	4.92	-61.55

Note: Margin value = Emission Level - Limit value

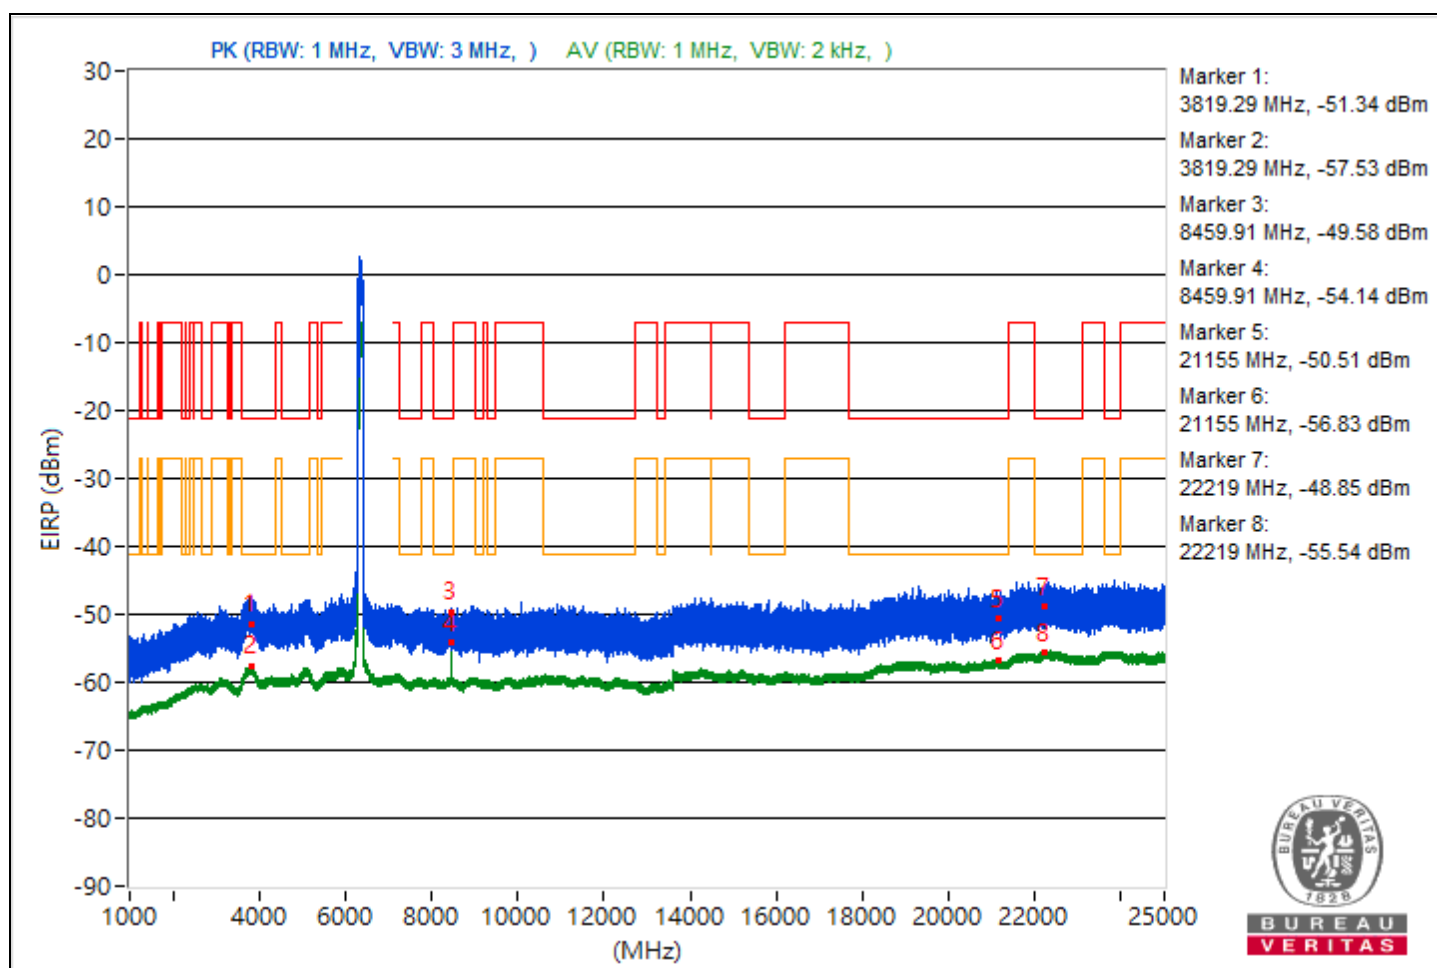


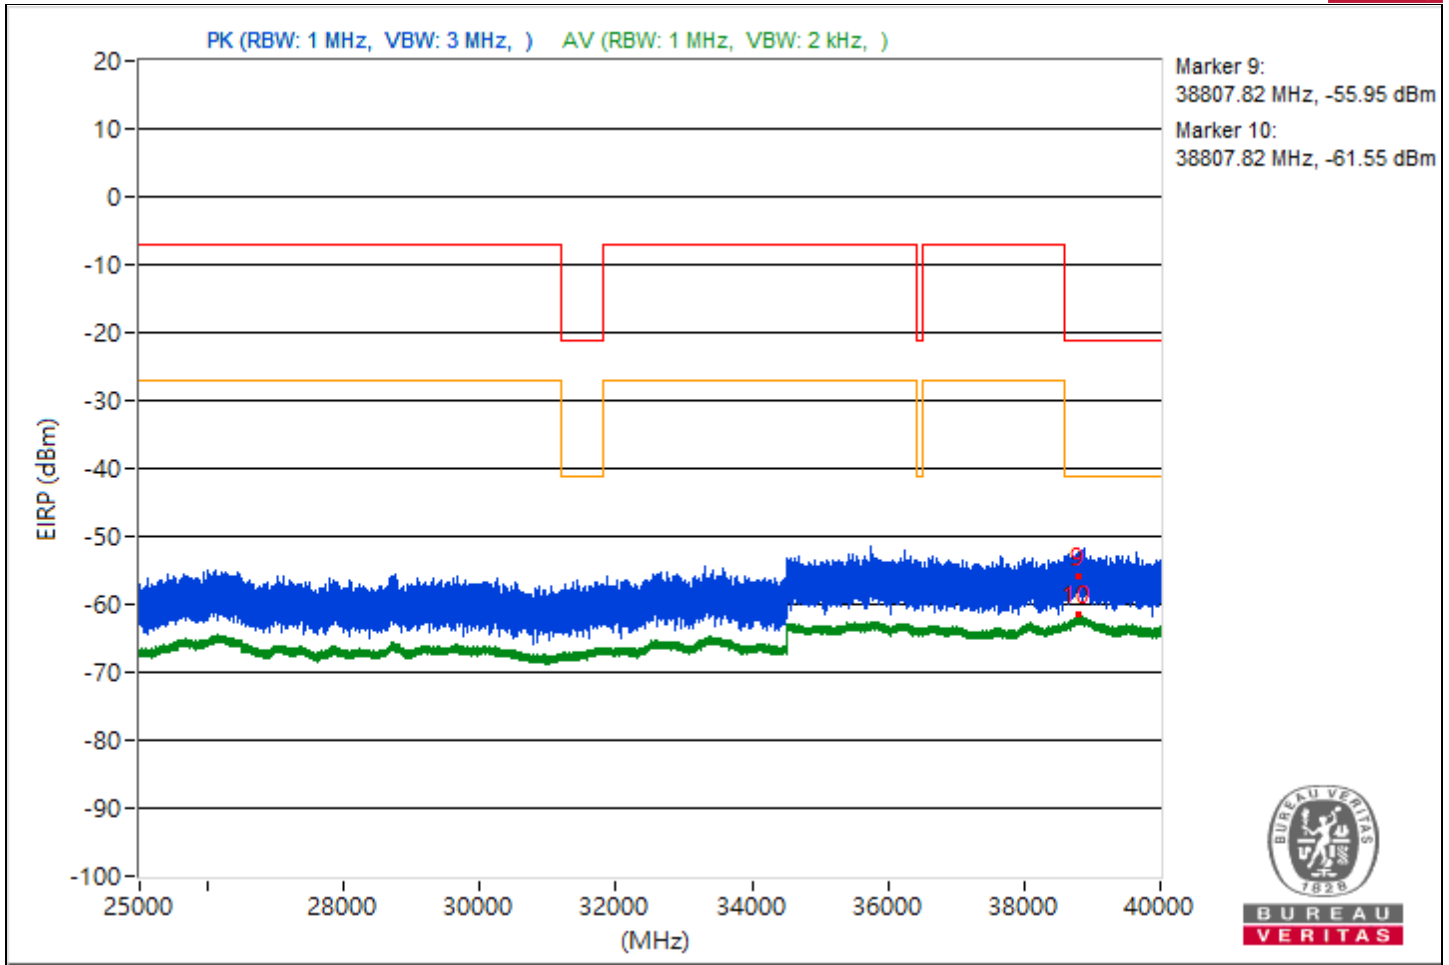


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.09	45.85 PK	74	-28.15	-57.65	-57.06	4.92	-49.41
2	3787.09	37.71 AV	54	-16.29	-65.73	-65.24	4.92	-57.55
3	14492.27	43.56 PK	74	-30.44	-58.5	-61.16	4.92	-51.7
4	14492.27	36.69 AV	54	-17.31	-66.86	-66.18	4.92	-58.57
5	21131.3	44.7 PK	74	-29.3	-59.02	-58.02	4.92	-50.56
6	21131.3	38.58 AV	54	-15.42	-65.01	-64.24	4.92	-56.68
7	23658.5	46.91 PK	74	-27.09	-55.85	-56.75	4.92	-48.35
8	23658.5	40.01 AV	54	-13.99	-63.65	-62.76	4.92	-55.25
9	38794.67	40.1 PK	74	-33.9	-63.01	-63.16	4.92	-55.16
10	38794.67	33.46 AV	54	-20.54	-70.05	-69.43	4.92	-61.8

Note: Margin value = Emission Level - Limit value

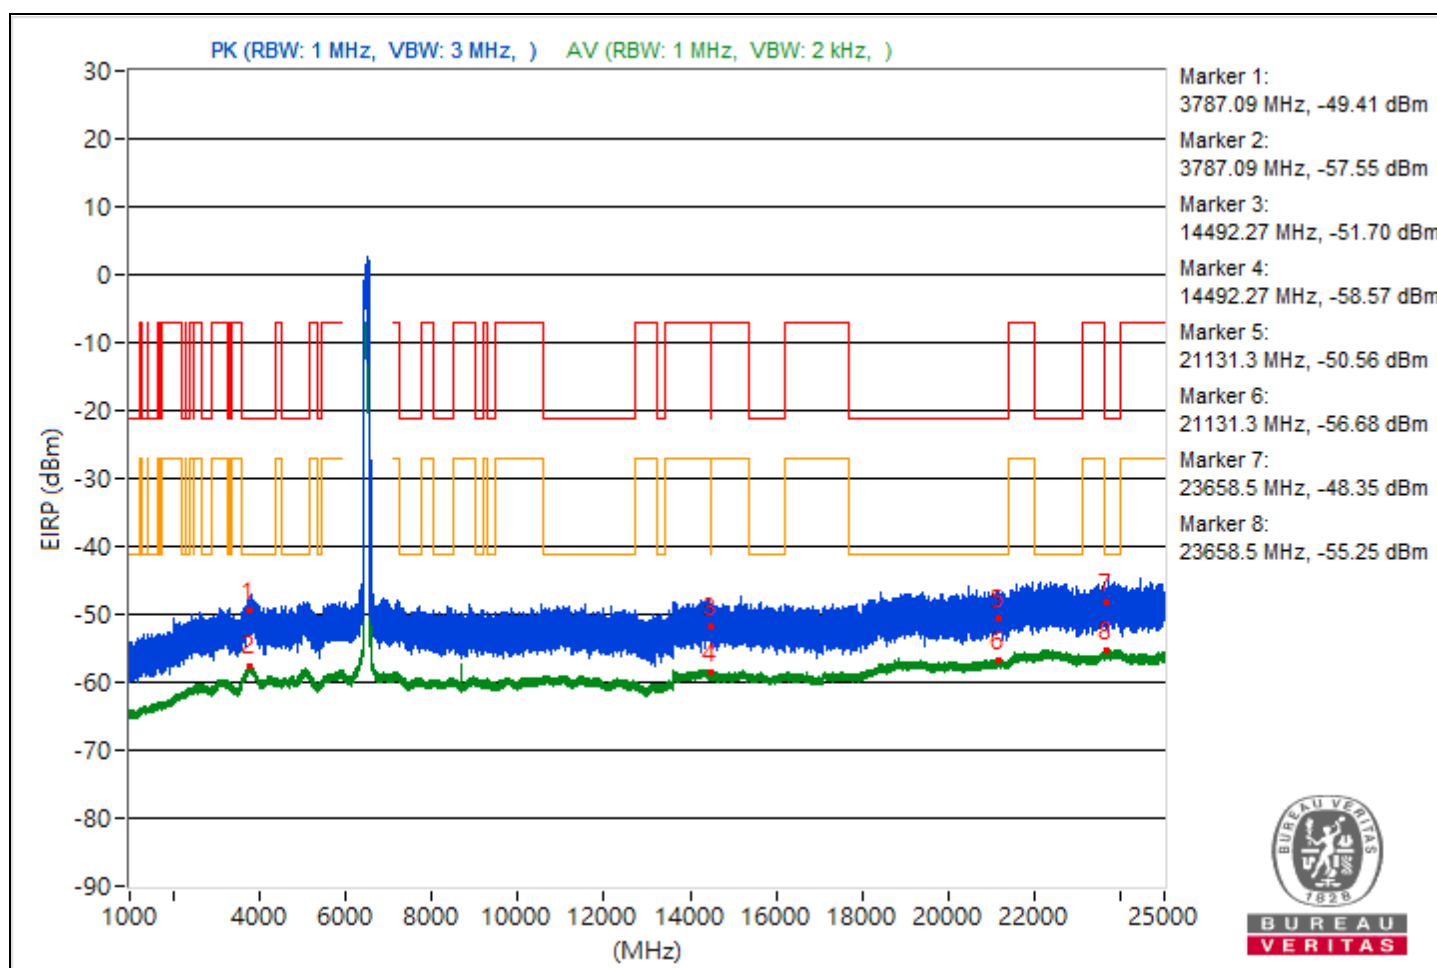

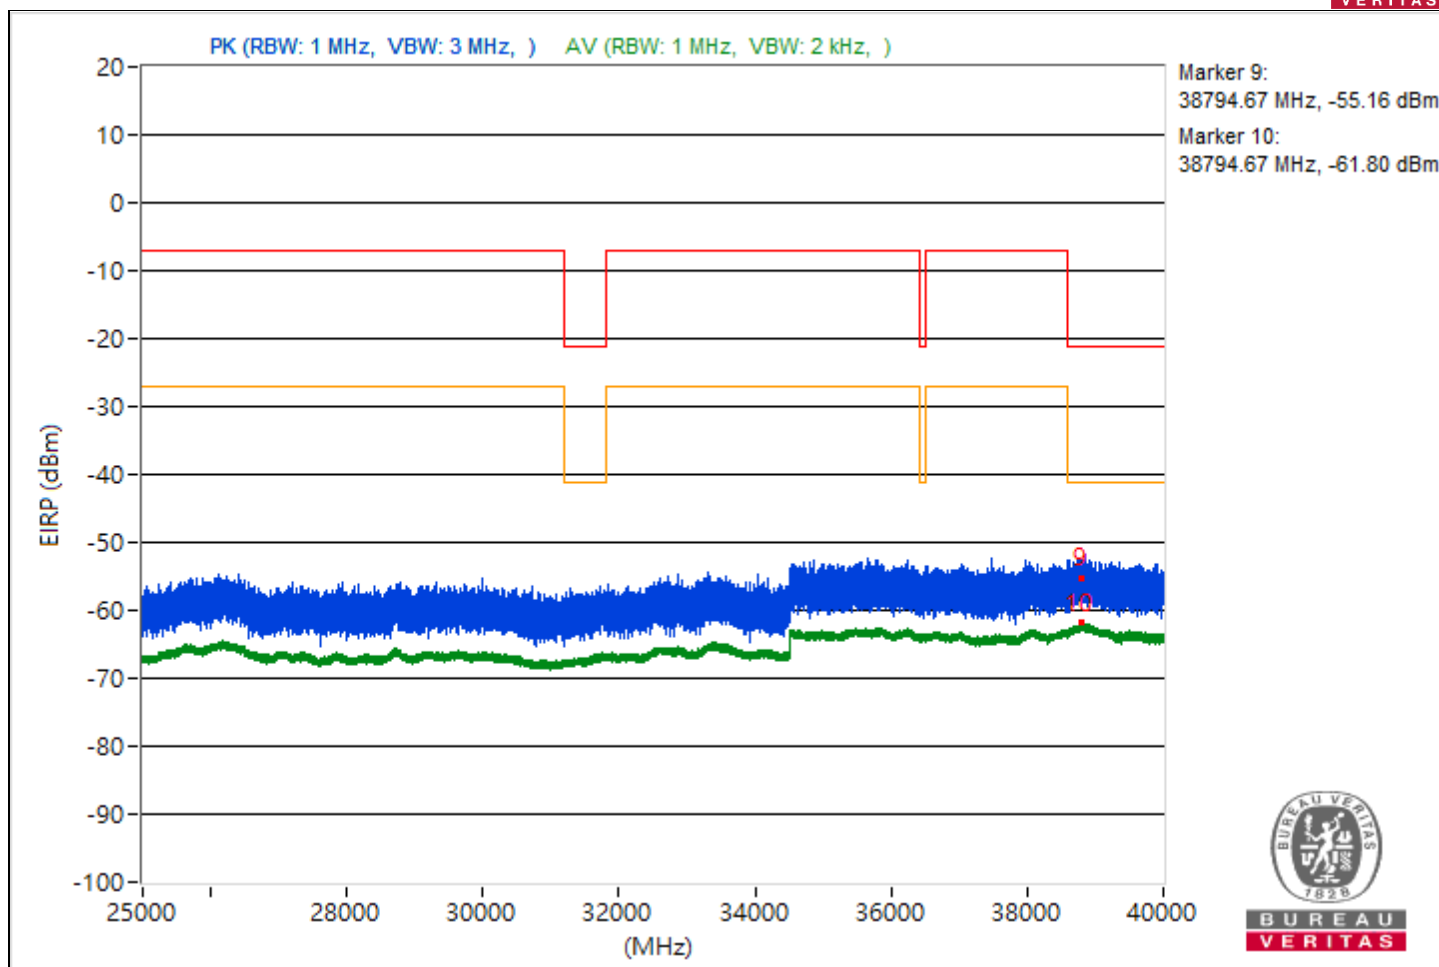

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	27°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3793	45.99 PK	74	-28.01	-57.8	-56.68	4.92	-49.27
2	3793	37.44 AV	54	-16.56	-65.38	-66.16	4.92	-57.82
3	14491.38	43.99 PK	74	-30.01	-58.63	-59.86	4.92	-51.27
4	14491.38	36.51 AV	54	-17.49	-66.42	-66.95	4.92	-58.75
5	21170.1	46.45 PK	74	-27.55	-58.98	-55.27	4.92	-48.81
6	21170.1	38.64 AV	54	-15.36	-63.98	-65.21	4.92	-56.62
7	23756.9	46.69 PK	74	-27.31	-58.32	-55.22	4.92	-48.57
8	23756.9	39.74 AV	54	-14.26	-62.83	-64.18	4.92	-55.52
9	38826.93	39.59 PK	74	-34.41	-62.76	-64.65	4.92	-55.67
10	38826.93	33.44 AV	54	-20.56	-70.16	-69.38	4.92	-61.82

Note: Margin value = Emission Level - Limit value

