



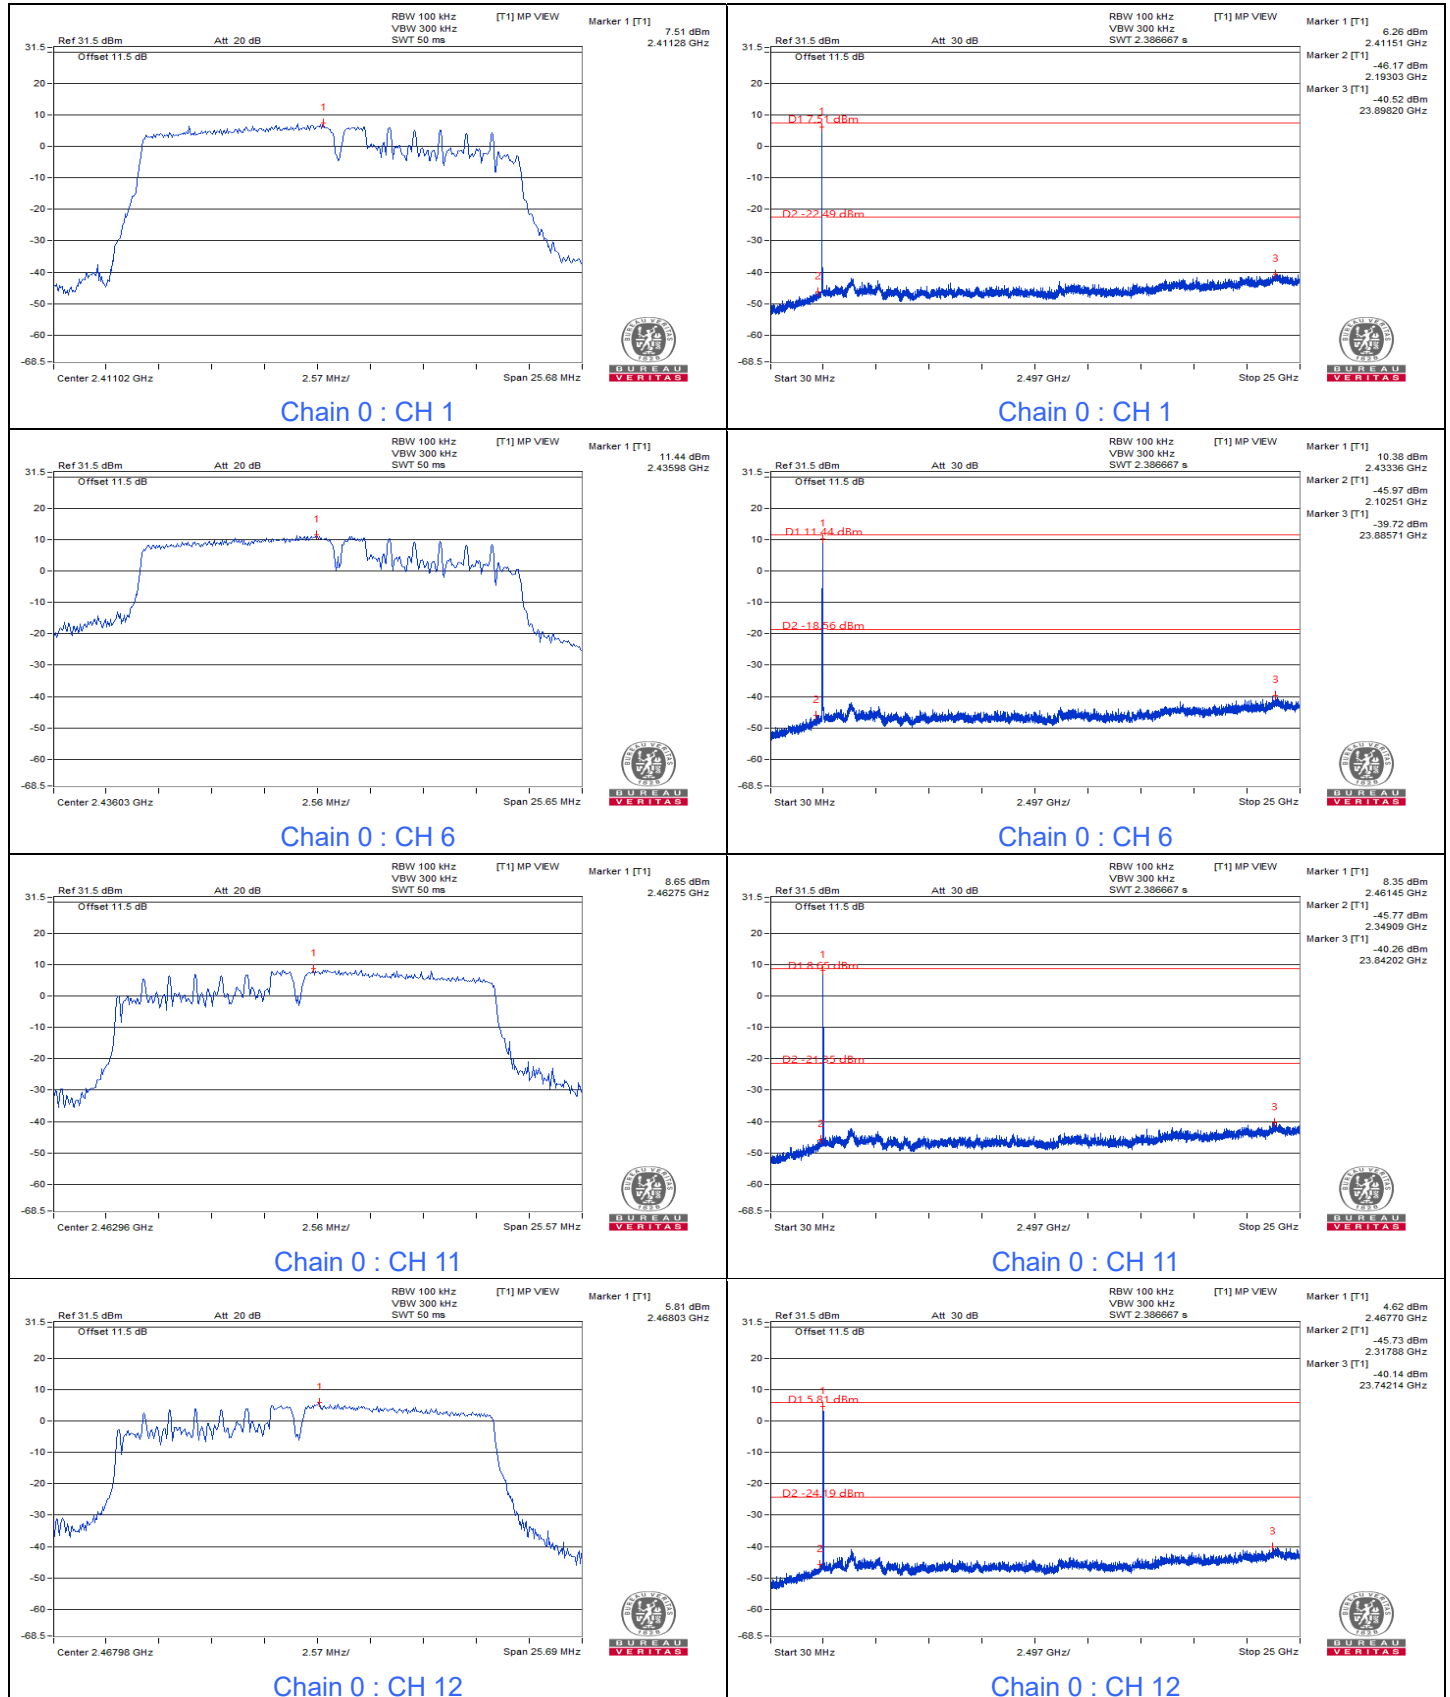
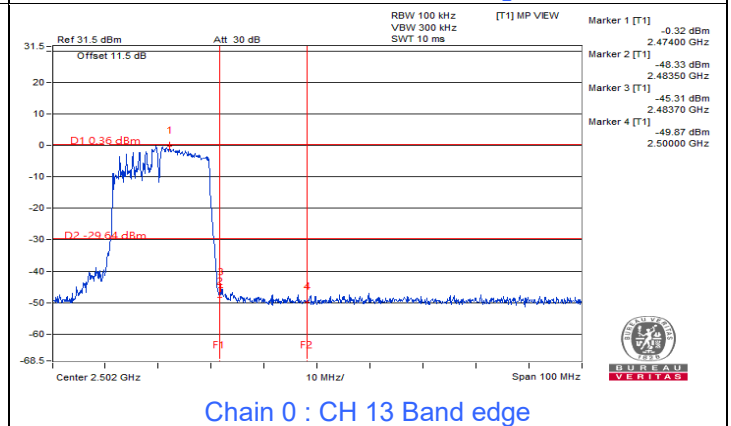
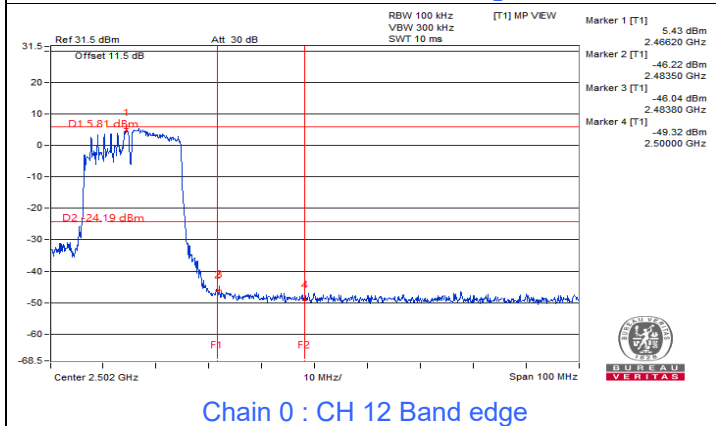
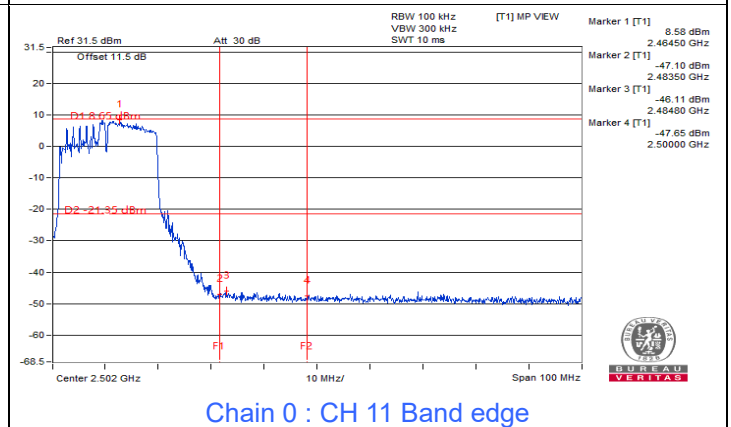
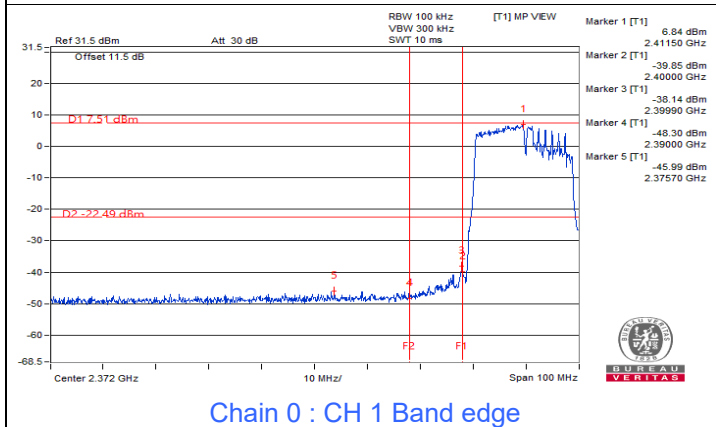
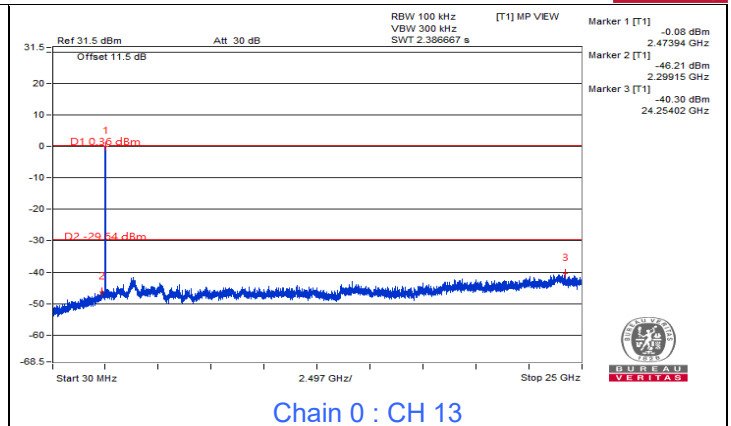
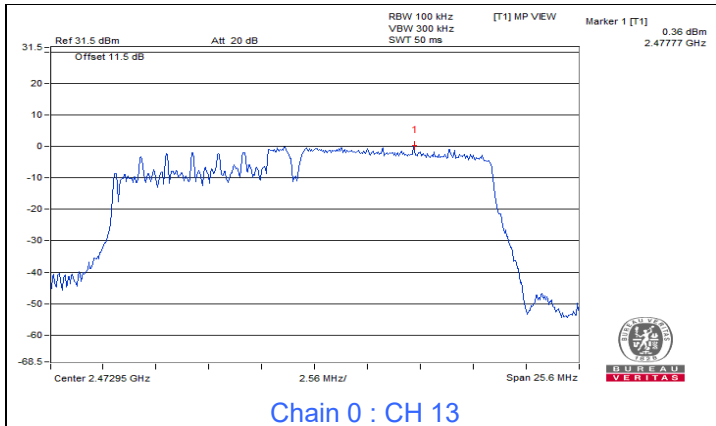
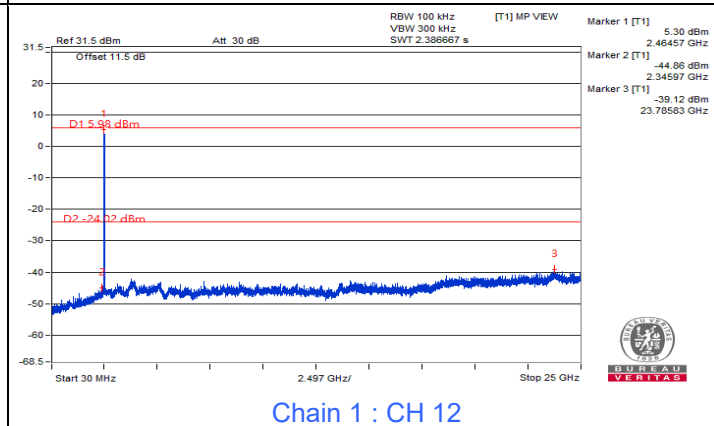
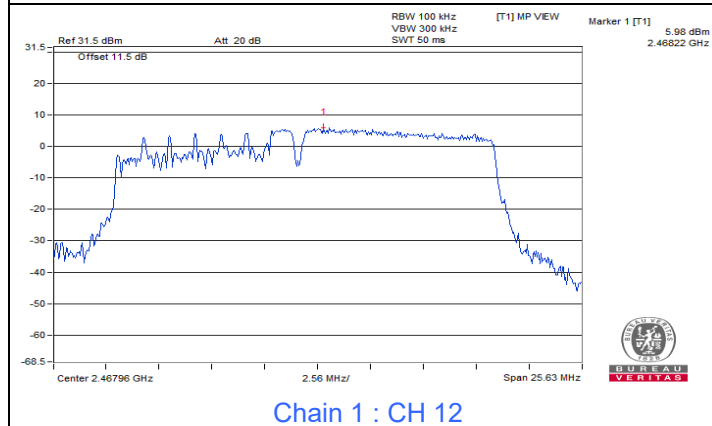
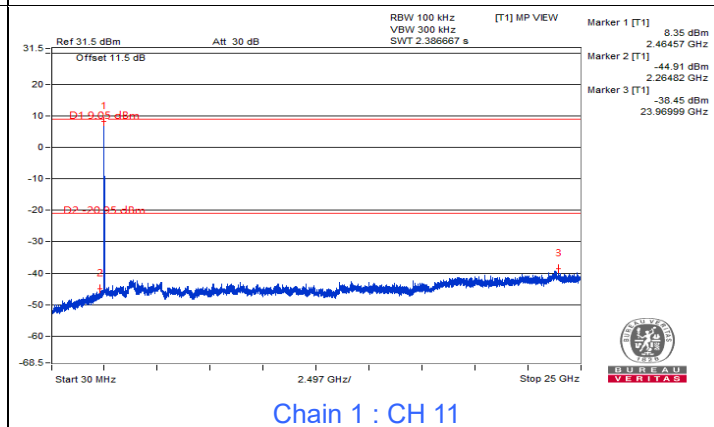
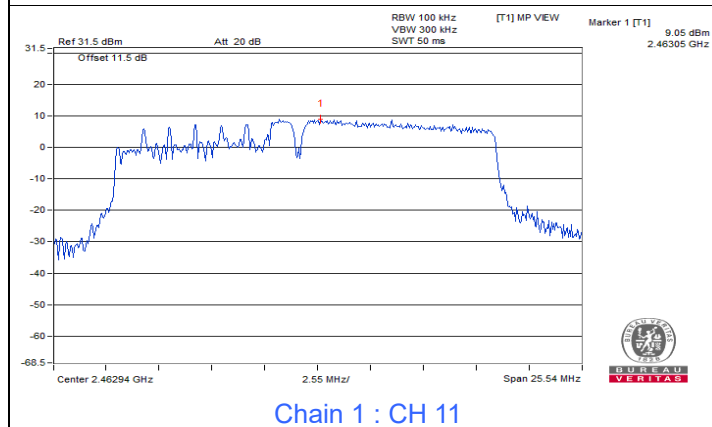
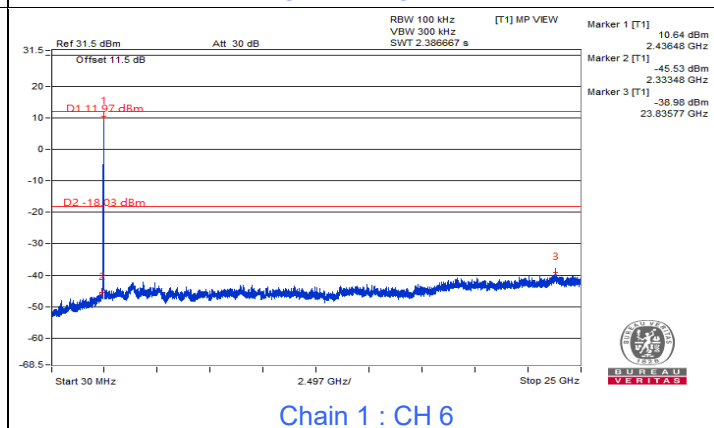
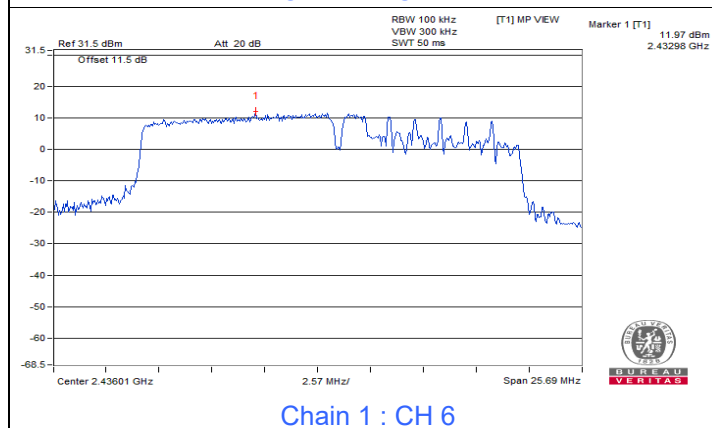
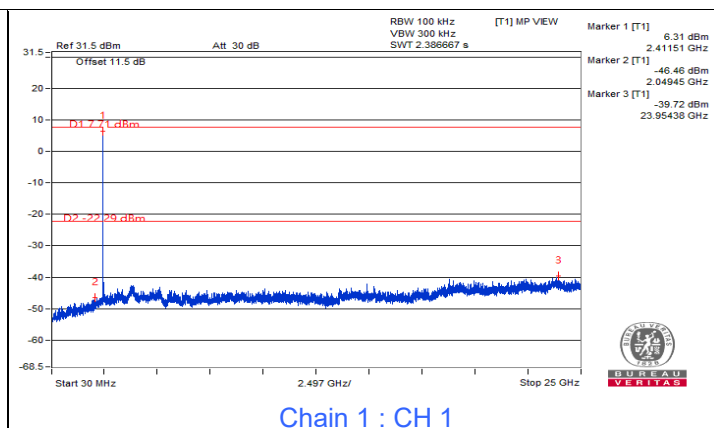
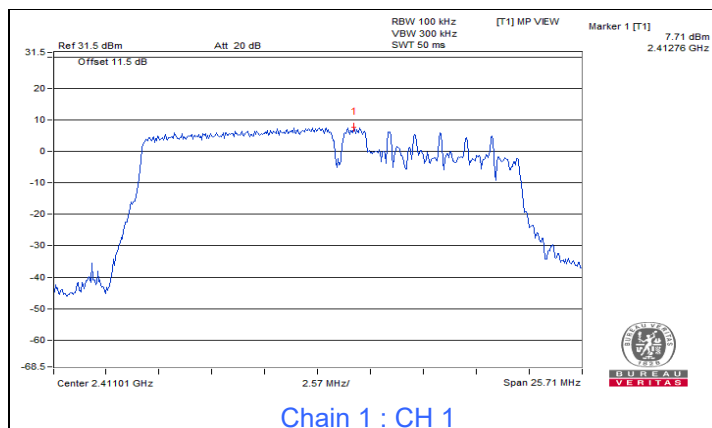
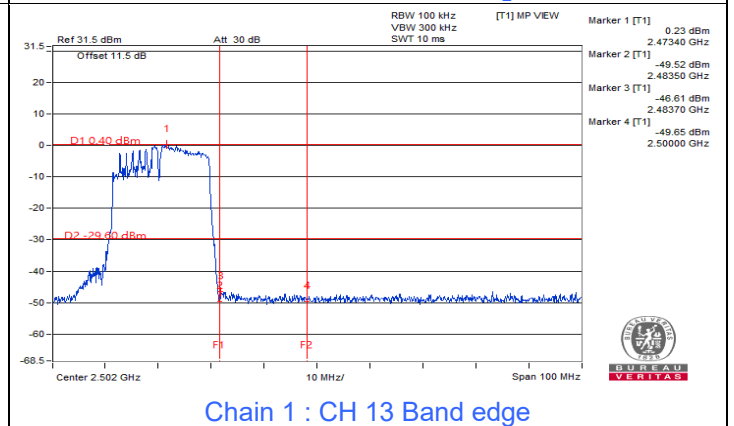
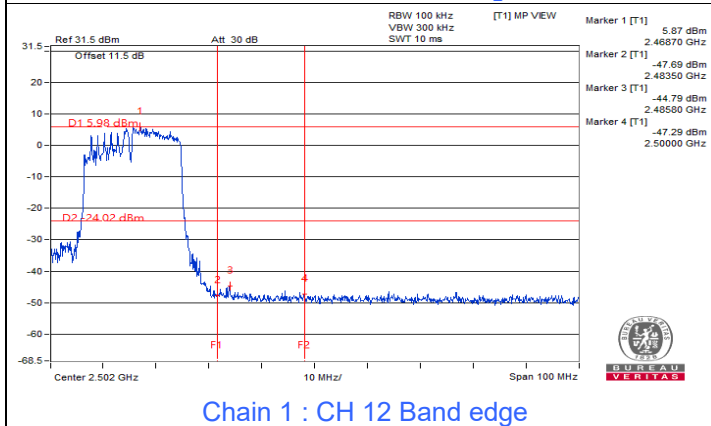


802.11be (EHT20) 106+26-tone MRU 2S2T

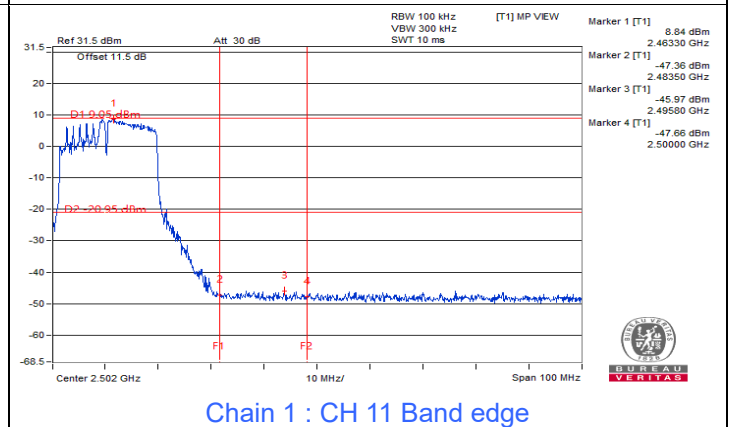

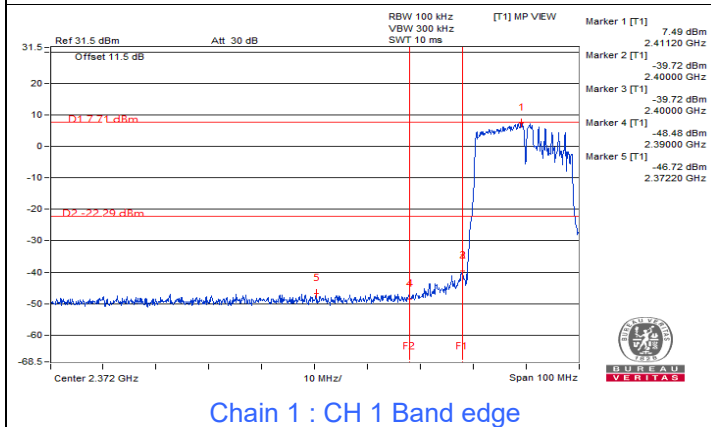

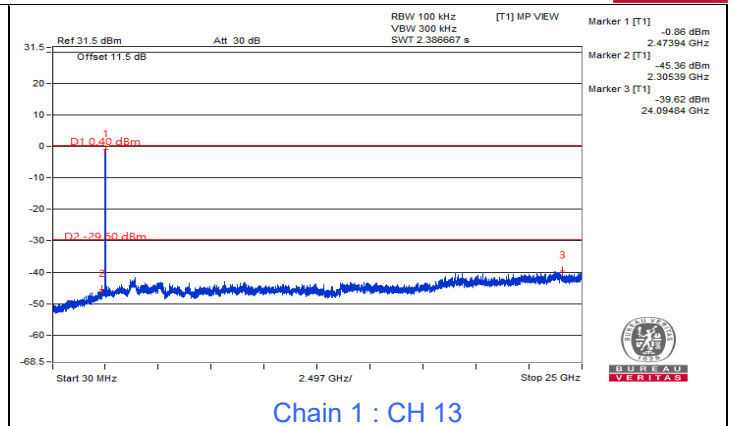

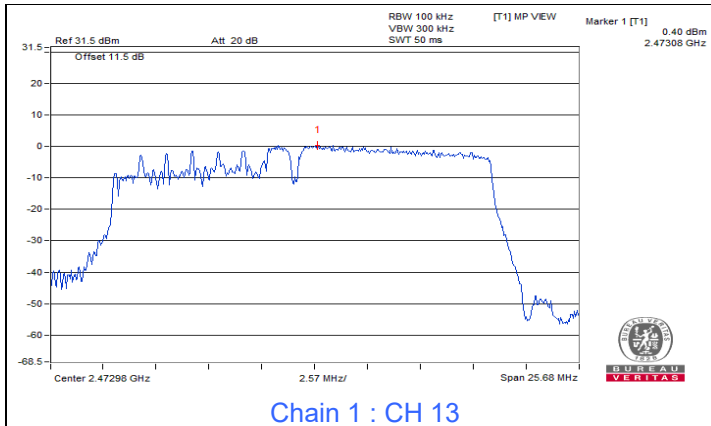

7.5 AC Power Conducted Emissions


1TX

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 62 % RH
Tested By	Willy Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.01	47.37	32.66	57.38	42.67	66.00	56.00	-8.62	-13.33
2	0.25938	10.02	31.91	18.18	41.93	28.20	61.45	51.45	-19.52	-23.25
3	0.48594	10.03	26.14	17.25	36.17	27.28	56.24	46.24	-20.07	-18.96
4	2.16797	10.10	18.35	11.28	28.45	21.38	56.00	46.00	-27.55	-24.62
5	7.82031	10.40	12.97	7.28	23.37	17.68	60.00	50.00	-36.63	-32.32
6	17.52734	10.92	19.19	13.94	30.11	24.86	60.00	50.00	-29.89	-25.14

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

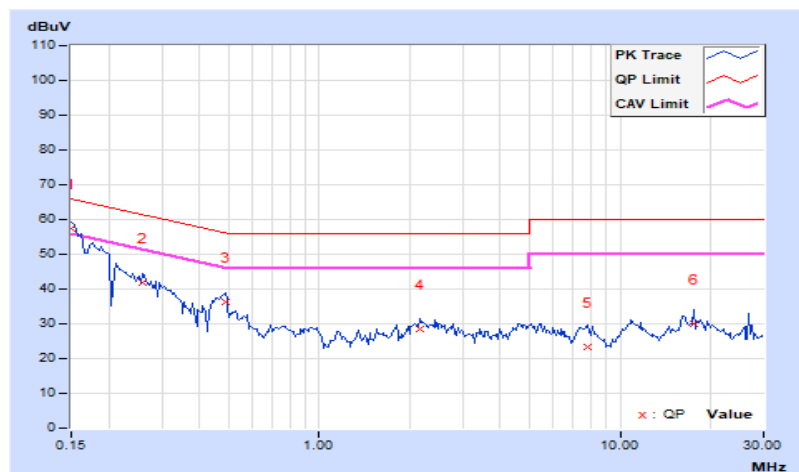


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 62 % RH
Tested By	Willy Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.00	46.96	32.60	56.96	42.60	66.00	56.00	-9.04	-13.40
2	0.45078	10.01	23.68	13.30	33.69	23.31	56.86	46.86	-23.17	-23.55
3	0.97031	10.04	12.20	5.08	22.24	15.12	56.00	46.00	-33.76	-30.88
4	3.45313	10.14	18.29	7.56	28.43	17.70	56.00	46.00	-27.57	-28.30
5	4.97656	10.20	18.99	11.93	29.19	22.13	56.00	46.00	-26.81	-23.87
6	16.31641	10.65	16.98	9.47	27.63	20.12	60.00	50.00	-32.37	-29.88

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

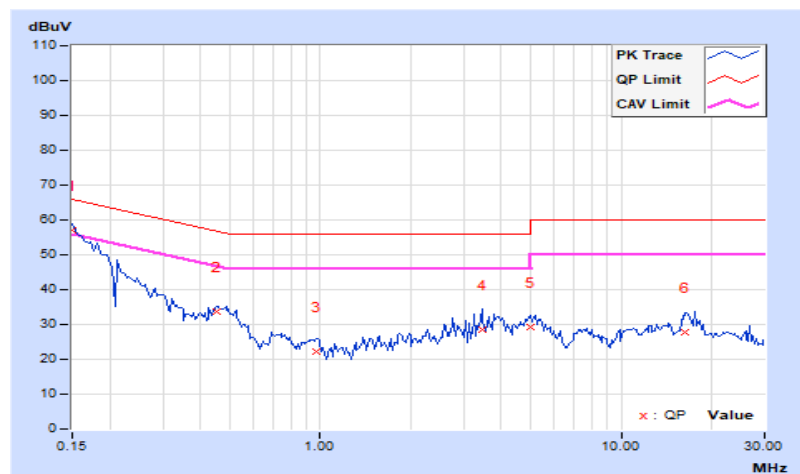


2S2T

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 62 % RH
Tested By	Willy Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.01	46.88	30.61	56.89	40.62	66.00	56.00	-9.11	-15.38
2	0.48594	10.03	25.89	16.32	35.92	26.35	56.24	46.24	-20.32	-19.89
3	2.18359	10.10	18.99	12.17	29.09	22.27	56.00	46.00	-26.91	-23.73
4	5.01563	10.25	16.73	9.61	26.98	19.86	60.00	50.00	-33.02	-30.14
5	10.78516	10.55	15.49	9.19	26.04	19.74	60.00	50.00	-33.96	-30.26
6	16.01563	10.85	19.80	17.13	30.65	27.98	60.00	50.00	-29.35	-22.02

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

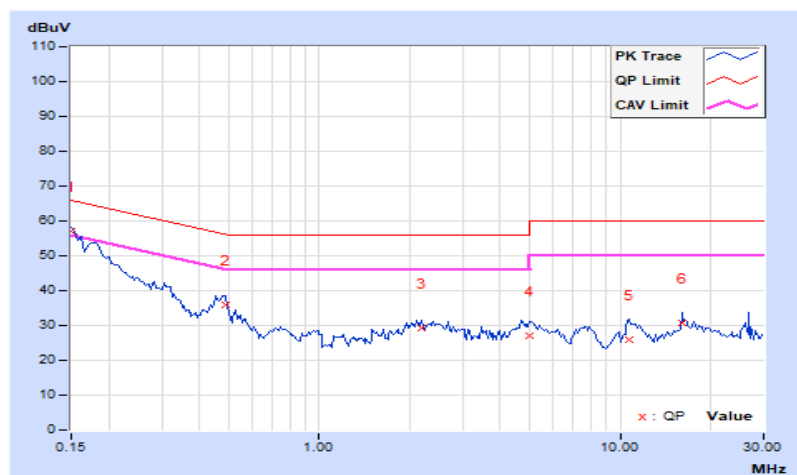


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 62 % RH
Tested By	Willy Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.00	46.34	28.15	56.34	38.15	66.00	56.00	-9.66	-17.85
2	0.27891	10.01	27.76	10.44	37.77	20.45	60.85	50.85	-23.08	-30.40
3	0.45859	10.01	23.94	13.84	33.95	23.85	56.72	46.72	-22.77	-22.87
4	3.89453	10.16	19.35	9.78	29.51	19.94	56.00	46.00	-26.49	-26.06
5	4.91016	10.20	19.09	11.75	29.29	21.95	56.00	46.00	-26.71	-24.05
6	16.58594	10.66	16.71	9.03	27.37	19.69	60.00	50.00	-32.63	-30.31

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

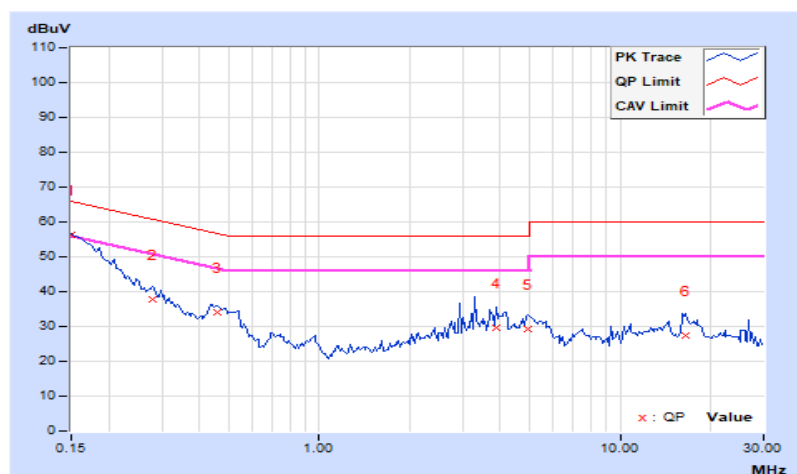

7.6 Unwanted Emissions below 1 GHz

Mode A


1TX

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	33.76	27.88 PK	40	-12.12	-80.45	13.07	-67.38
2	91.47	28.72 PK	43.5	-14.78	-79.61	13.07	-66.54
3	244.49	30.02 PK	46	-15.98	-78.31	13.07	-65.24
4	444.31	29.31 PK	46	-16.69	-79.02	13.07	-65.95
5	726.82	29.51 PK	46	-16.49	-78.82	13.07	-65.75
6	925.67	30.57 PK	46	-15.43	-77.76	13.07	-64.69

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

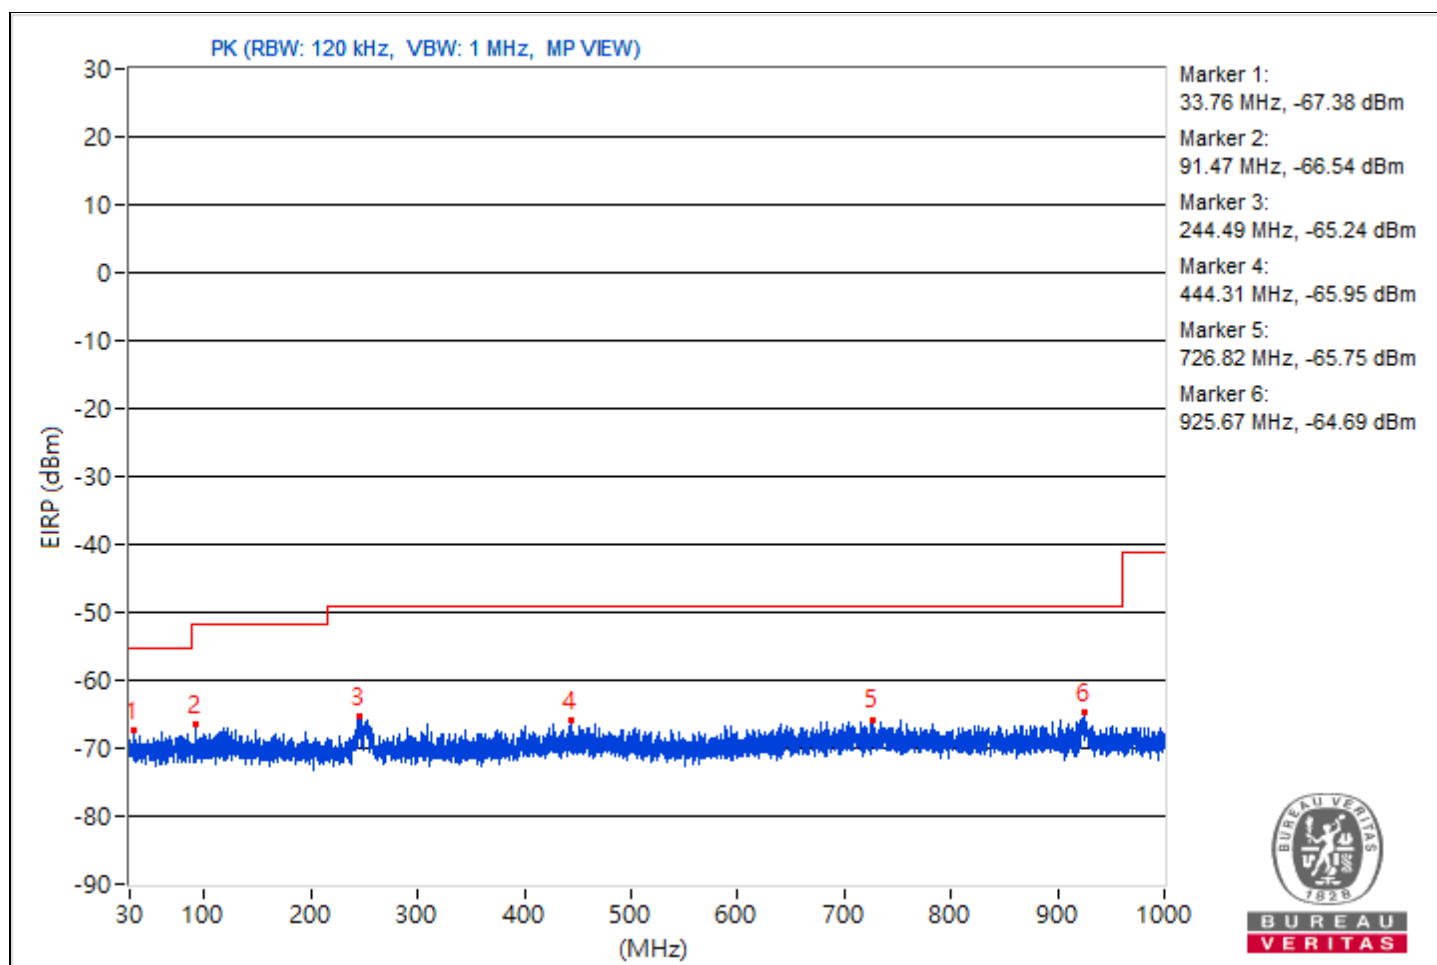


2S2T

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	66.62	29.66 PK	40	-10.34	-80.26	-83.78	13.07	-65.6
2	119.24	30.49 PK	43.5	-13.01	-78.92	-84.44	13.07	-64.77
3	254.68	30.94 PK	46	-15.06	-79.26	-81.95	13.07	-64.32
4	465.65	31.41 PK	46	-14.59	-82.48	-78.33	13.07	-63.85
5	696.87	32.2 PK	46	-13.8	-80.27	-78.24	13.07	-63.06
6	906.39	31.47 PK	46	-14.53	-81.16	-78.88	13.07	-63.79

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

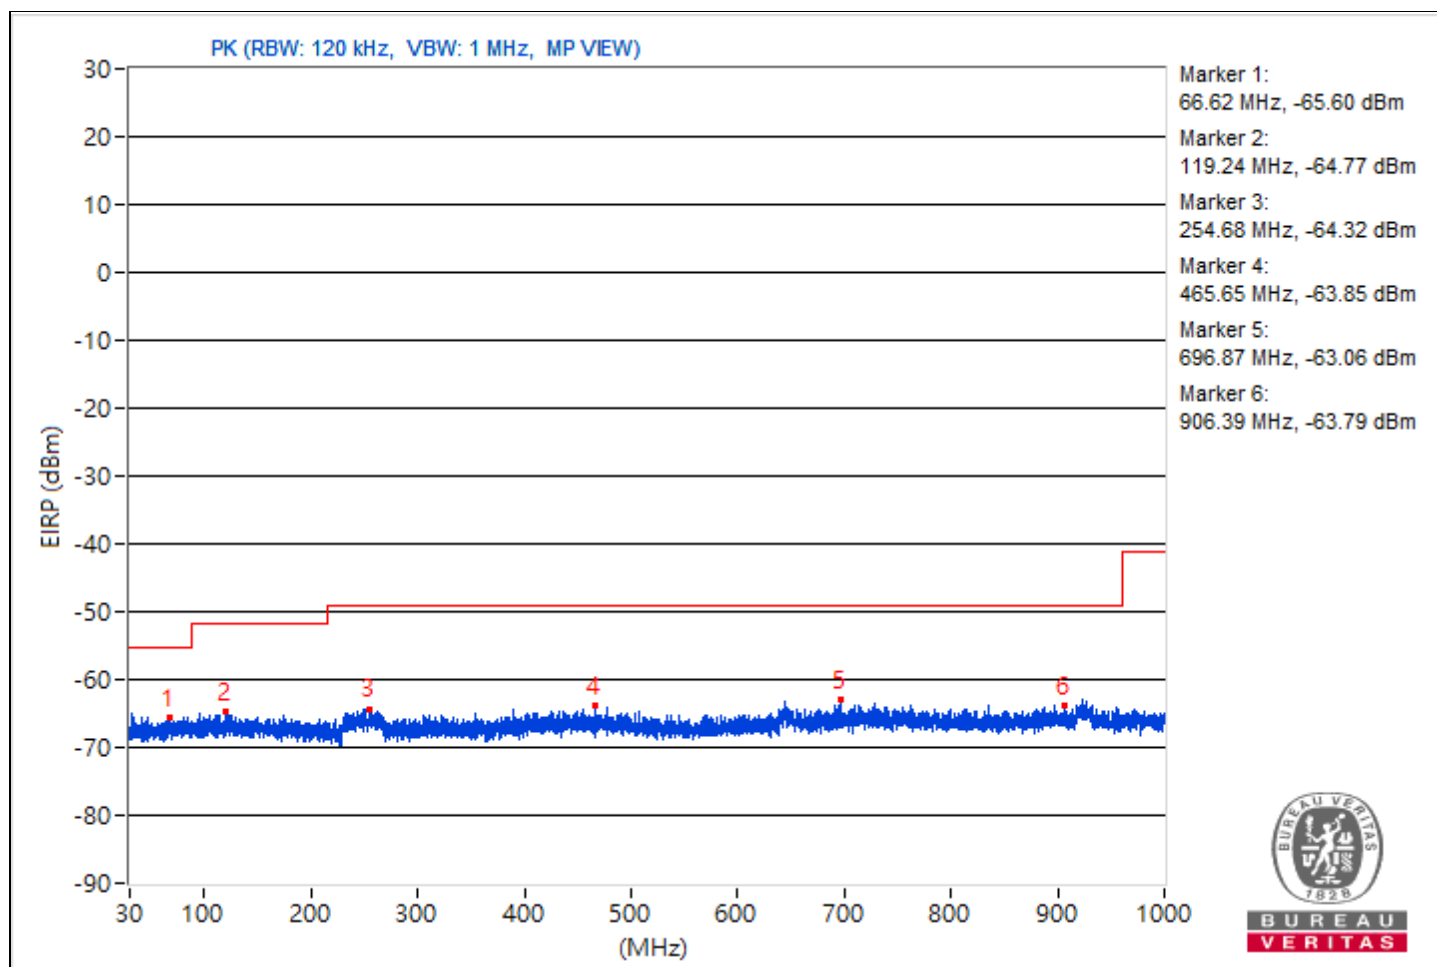


Mode B
1TX

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	104.24	24.6 QP	43.5	-18.9	1.50 H	318	40.9	-16.3
2	239.28	37.3 QP	46.0	-8.7	2.00 H	249	51.8	-14.5
3	300.17	39.5 QP	46.0	-6.5	1.00 H	297	51.8	-12.3
4	440.04	40.9 QP	46.0	-5.1	2.00 H	276	49.4	-8.5
5	696.11	44.2 QP	46.0	-1.8	2.00 H	239	47.7	-3.5
6	909.25	42.9 QP	46.0	-3.1	1.50 H	233	42.8	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

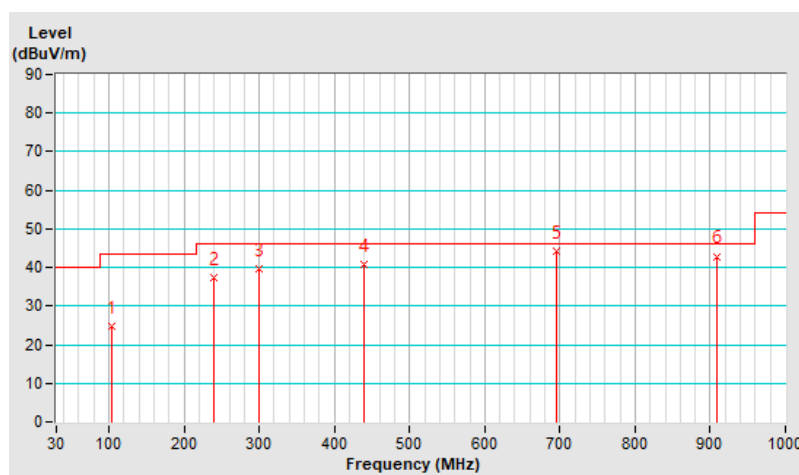


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.63	29.2 QP	40.0	-10.8	1.00 V	249	43.0	-13.8
2	111.95	34.2 QP	43.5	-9.3	1.50 V	342	49.6	-15.4
3	219.47	40.2 QP	46.0	-5.8	2.00 V	180	56.7	-16.5
4	248.07	30.2 QP	46.0	-15.8	1.00 V	45	44.3	-14.1
5	286.73	37.8 QP	46.0	-8.2	1.50 V	271	50.5	-12.7
6	694.02	34.2 QP	46.0	-11.8	1.50 V	39	37.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

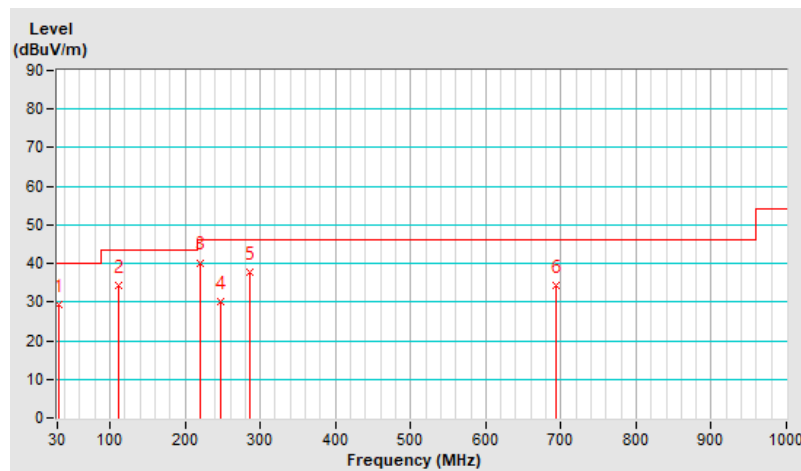


2S2T

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	103.77	30.0 QP	43.5	-13.5	1.50 H	313	46.3	-16.3
2	238.92	34.5 QP	46.0	-11.5	2.00 H	256	49.0	-14.5
3	302.61	41.1 QP	46.0	-4.9	3.00 H	277	53.3	-12.2
4	435.20	29.5 QP	46.0	-16.5	1.50 H	330	38.1	-8.6
5	696.13	39.1 QP	46.0	-6.9	2.00 H	260	42.6	-3.5
6	898.80	33.5 QP	46.0	-12.5	1.50 H	259	33.6	-0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

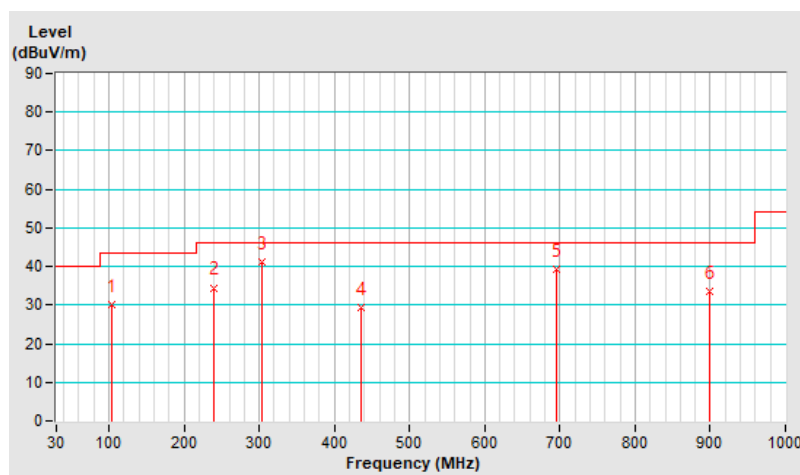


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.84	23.5 QP	40.0	-16.5	1.50 V	272	37.2	-13.7
2	108.75	35.7 QP	43.5	-7.8	2.00 V	294	51.4	-15.7
3	223.21	38.6 QP	46.0	-7.4	3.00 V	160	55.1	-16.5
4	247.77	42.3 QP	46.0	-3.7	1.50 V	0	56.5	-14.2
5	286.92	44.2 QP	46.0	-1.8	1.50 V	271	56.9	-12.7
6	694.41	43.0 QP	46.0	-3.0	3.00 V	14	46.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

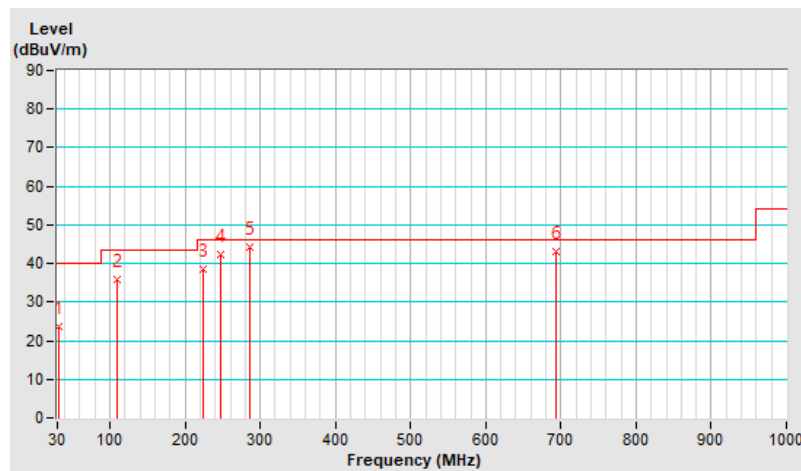

7.7 Unwanted Emissions above 1 GHz

Mode A


Conducted Unwanted Emissions

1TX

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.61	55.94 PK	74	-18.06	-47.69	8.37	-39.32
2	2336.61	46.45 AV	54	-7.55	-57.18	8.37	-48.81
3	4824.02	58.74 PK	74	-15.26	-44.89	8.37	-36.52
4	4824.02	53.29 AV	54	-0.71	-50.34	8.37	-41.97
5	14481.24	53.74 PK	74	-20.26	-49.89	8.37	-41.52
6	14481.24	46.82 AV	54	-7.18	-56.81	8.37	-48.44
7	23879.3	57 PK	74	-17	-46.63	8.37	-38.26
8	23879.3	50.46 AV	54	-3.54	-53.17	8.37	-44.8


Note: Margin value = Emission Level - Limit value

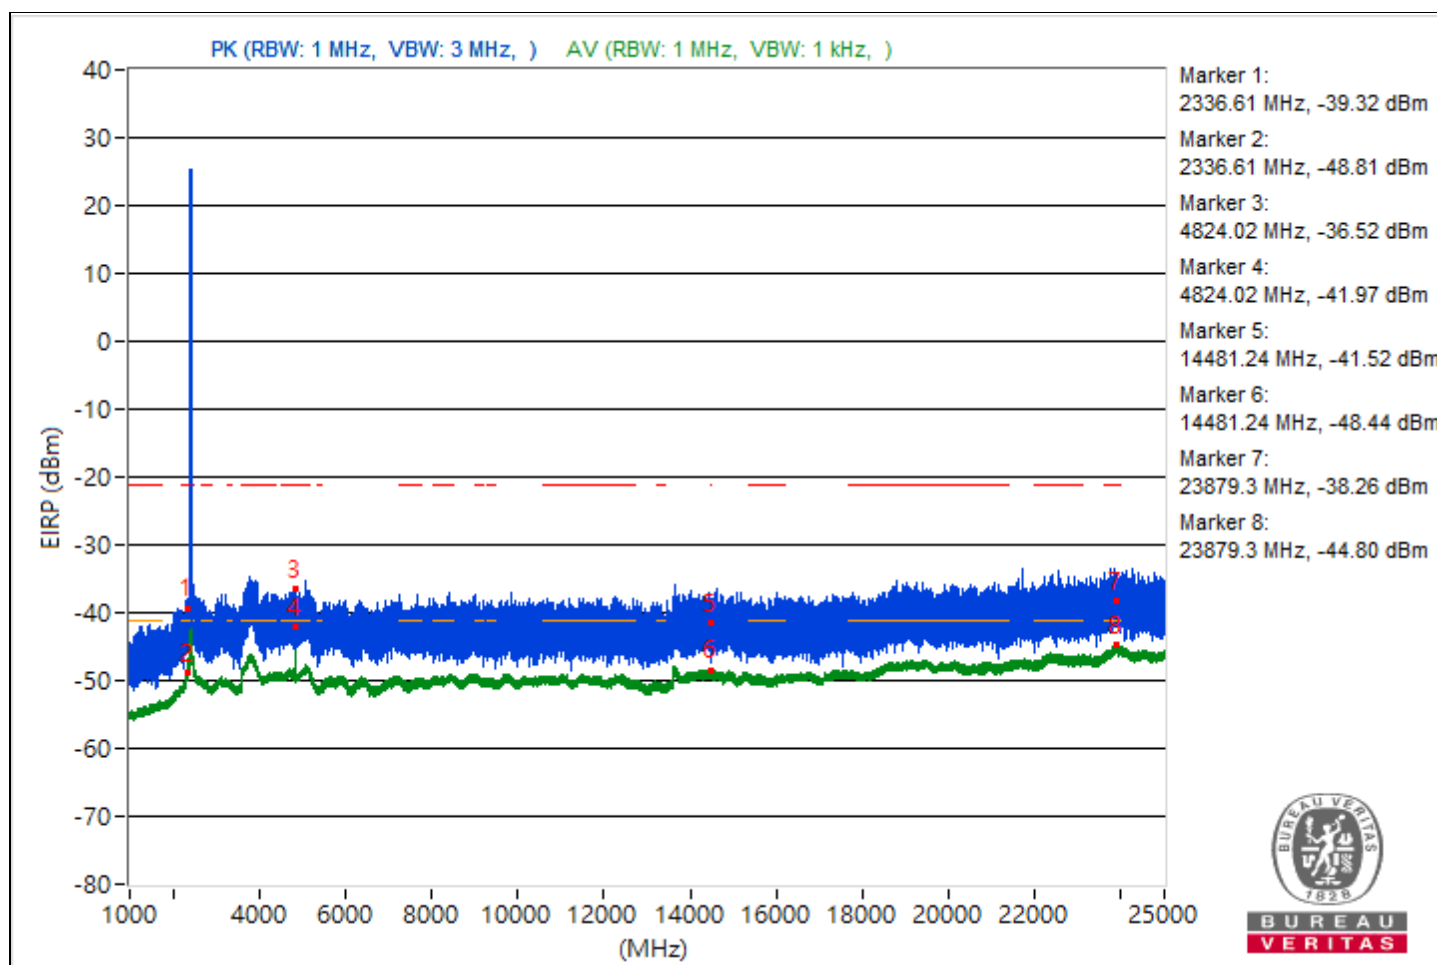

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.46	52.31 PK	74	-21.69	-51.32	8.37	-42.95
2	2336.46	47.25 AV	54	-6.75	-56.38	8.37	-48.01
3	4873.96	59.94 PK	74	-14.06	-43.69	8.37	-35.32
4	4873.96	53.46 AV	54	-0.54	-50.17	8.37	-41.8
5	14492.89	53.86 PK	74	-20.14	-49.77	8.37	-41.4
6	14492.89	48.2 AV	54	-5.8	-55.43	8.37	-47.06
7	23916.9	59.26 PK	74	-14.74	-44.37	8.37	-36
8	23916.9	52.1 AV	54	-1.9	-51.53	8.37	-43.16


Note: Margin value = Emission Level - Limit value

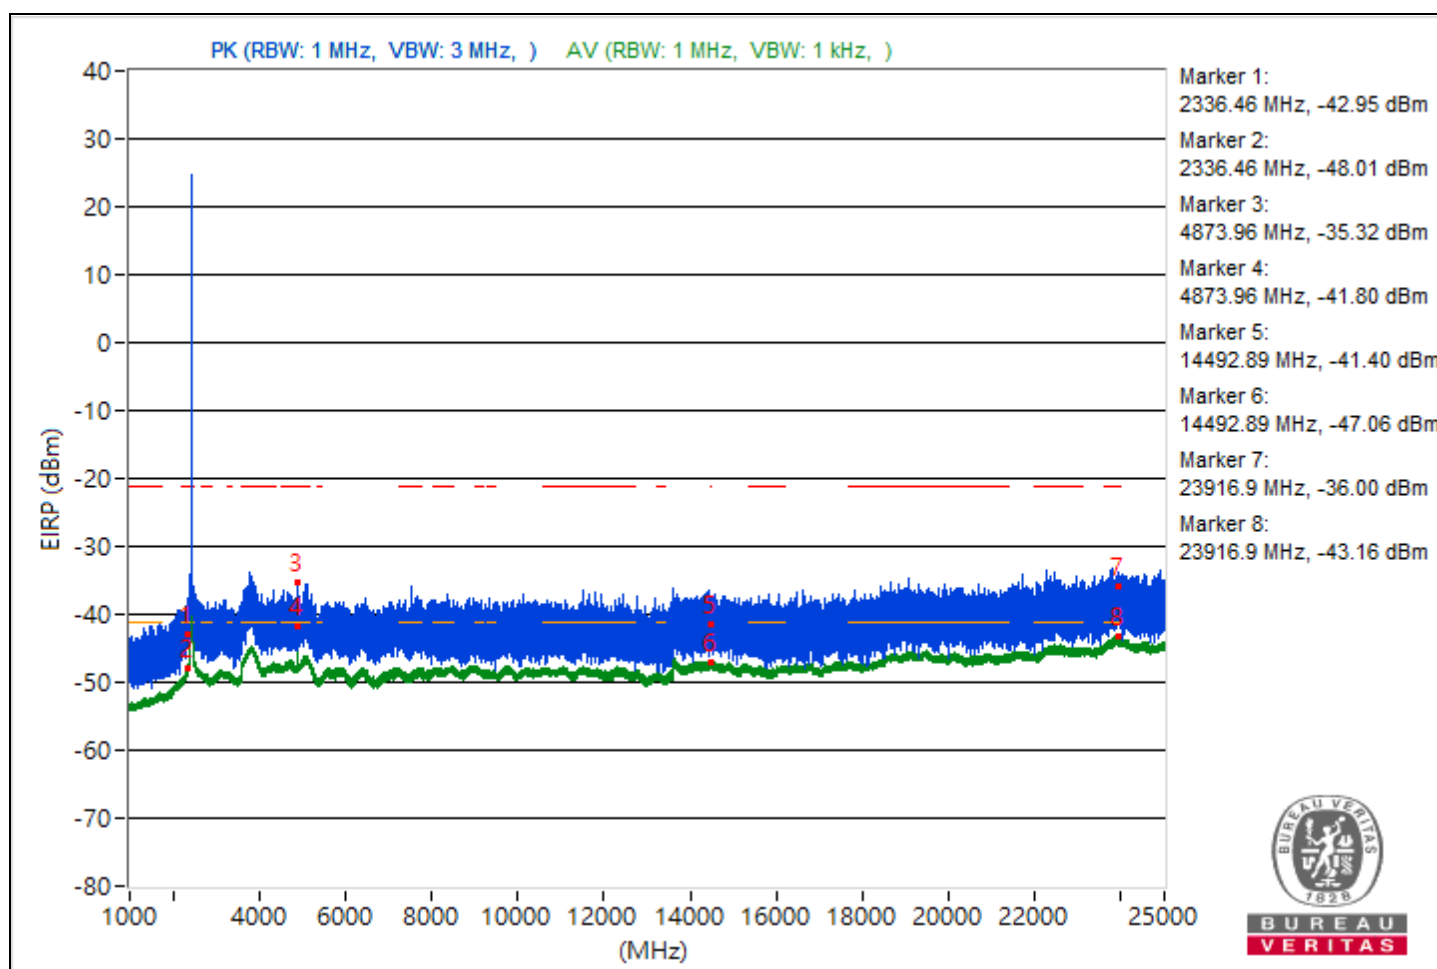

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.3	53.85 PK	74	-20.15	-49.78	8.37	-41.41
2	2336.3	47.12 AV	54	-6.88	-56.51	8.37	-48.14
3	4924.04	57.84 PK	74	-16.16	-45.79	8.37	-37.42
4	4924.04	53.47 AV	54	-0.53	-50.16	8.37	-41.79
5	14494.04	53.04 PK	74	-20.96	-50.59	8.37	-42.22
6	14494.04	48.25 AV	54	-5.75	-55.38	8.37	-47.01
7	23972.1	59.89 PK	74	-14.11	-43.74	8.37	-35.37
8	23972.1	52.04 AV	54	-1.96	-51.59	8.37	-43.22


Note: Margin value = Emission Level - Limit value

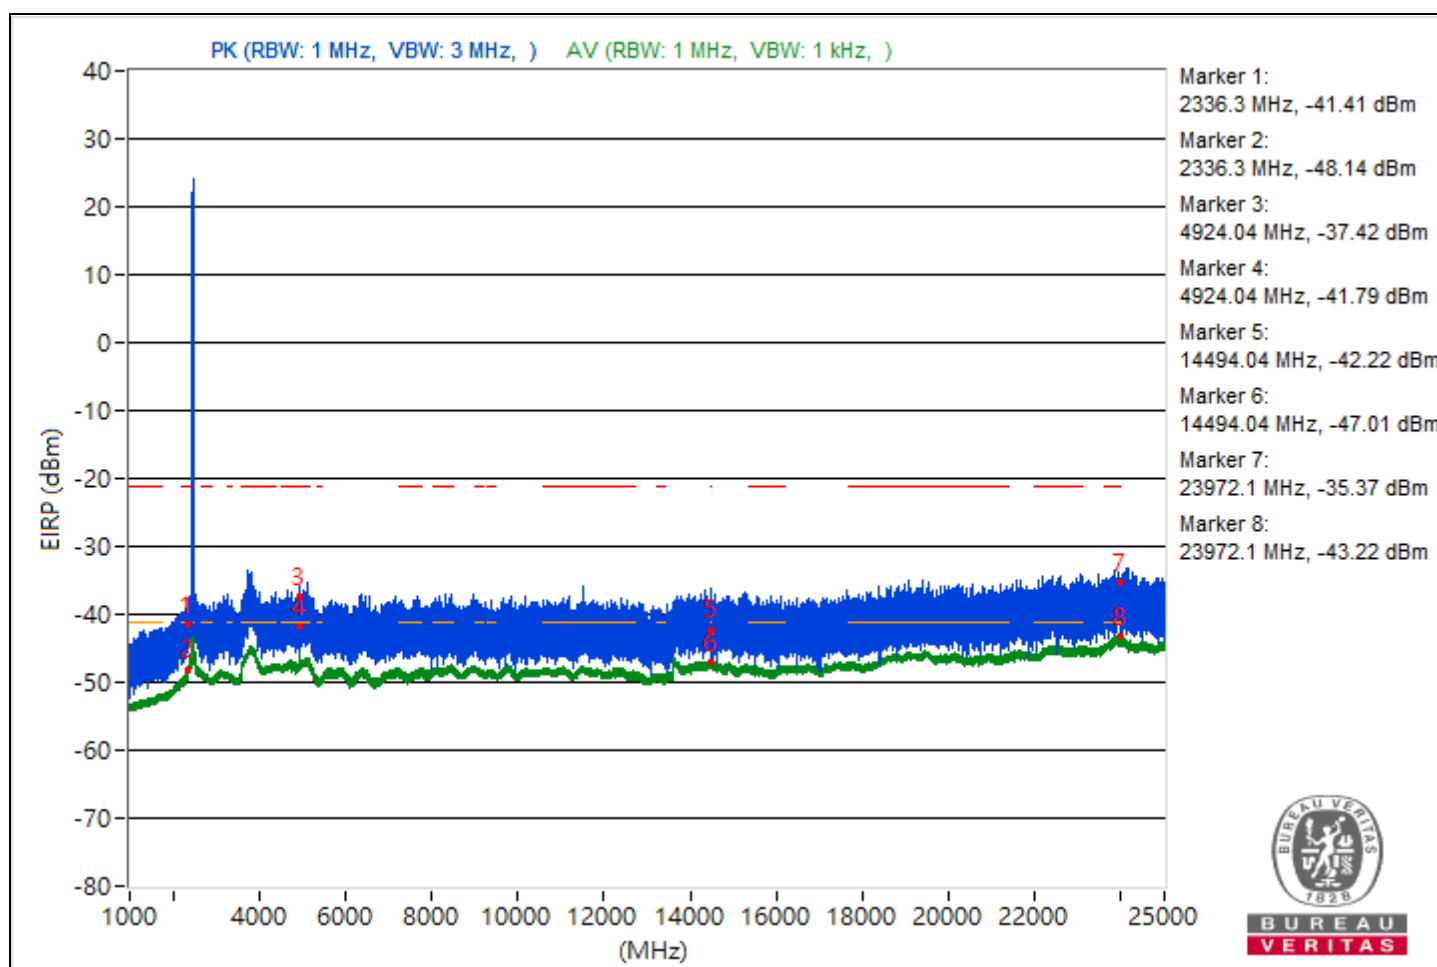

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.96	52.9 PK	74	-21.1	-50.73	8.37	-42.36
2	2339.96	45.78 AV	54	-8.22	-57.85	8.37	-49.48
3	3819.37	53.98 PK	74	-20.02	-49.65	8.37	-41.28
4	3819.37	46.96 AV	54	-7.04	-56.67	8.37	-48.3
5	14474.31	53.87 PK	74	-20.13	-49.76	8.37	-41.39
6	14474.31	46.17 AV	54	-7.83	-57.46	8.37	-49.09
7	22275.8	55.46 PK	74	-18.54	-48.17	8.37	-39.8
8	22275.8	49.4 AV	54	-4.6	-54.23	8.37	-45.86


Note: Margin value = Emission Level - Limit value

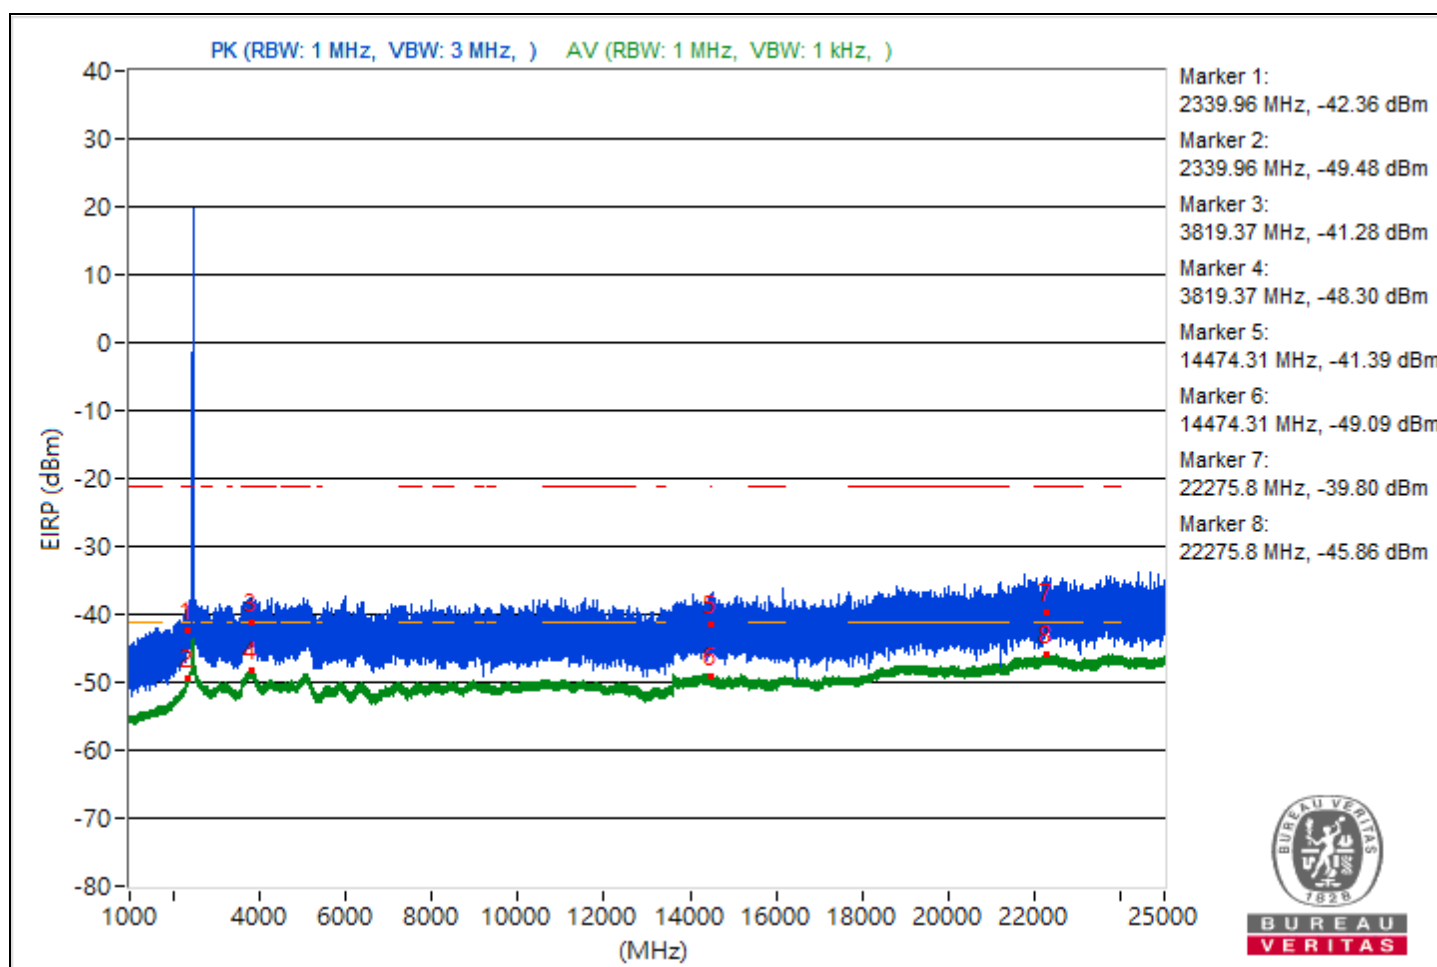

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.88	50.63 PK	74	-23.37	-53	8.37	-44.63
2	2339.88	44.36 AV	54	-9.64	-59.27	8.37	-50.9
3	3846.74	55.74 PK	74	-18.26	-47.89	8.37	-39.52
4	3846.74	46.96 AV	54	-7.04	-56.67	8.37	-48.3
5	14496.8	52.41 PK	74	-21.59	-51.22	8.37	-42.85
6	14496.8	46.03 AV	54	-7.97	-57.6	8.37	-49.23
7	23673.1	55.6 PK	74	-18.4	-48.03	8.37	-39.66
8	23673.1	49.36 AV	54	-4.64	-54.27	8.37	-45.9


Note: Margin value = Emission Level - Limit value

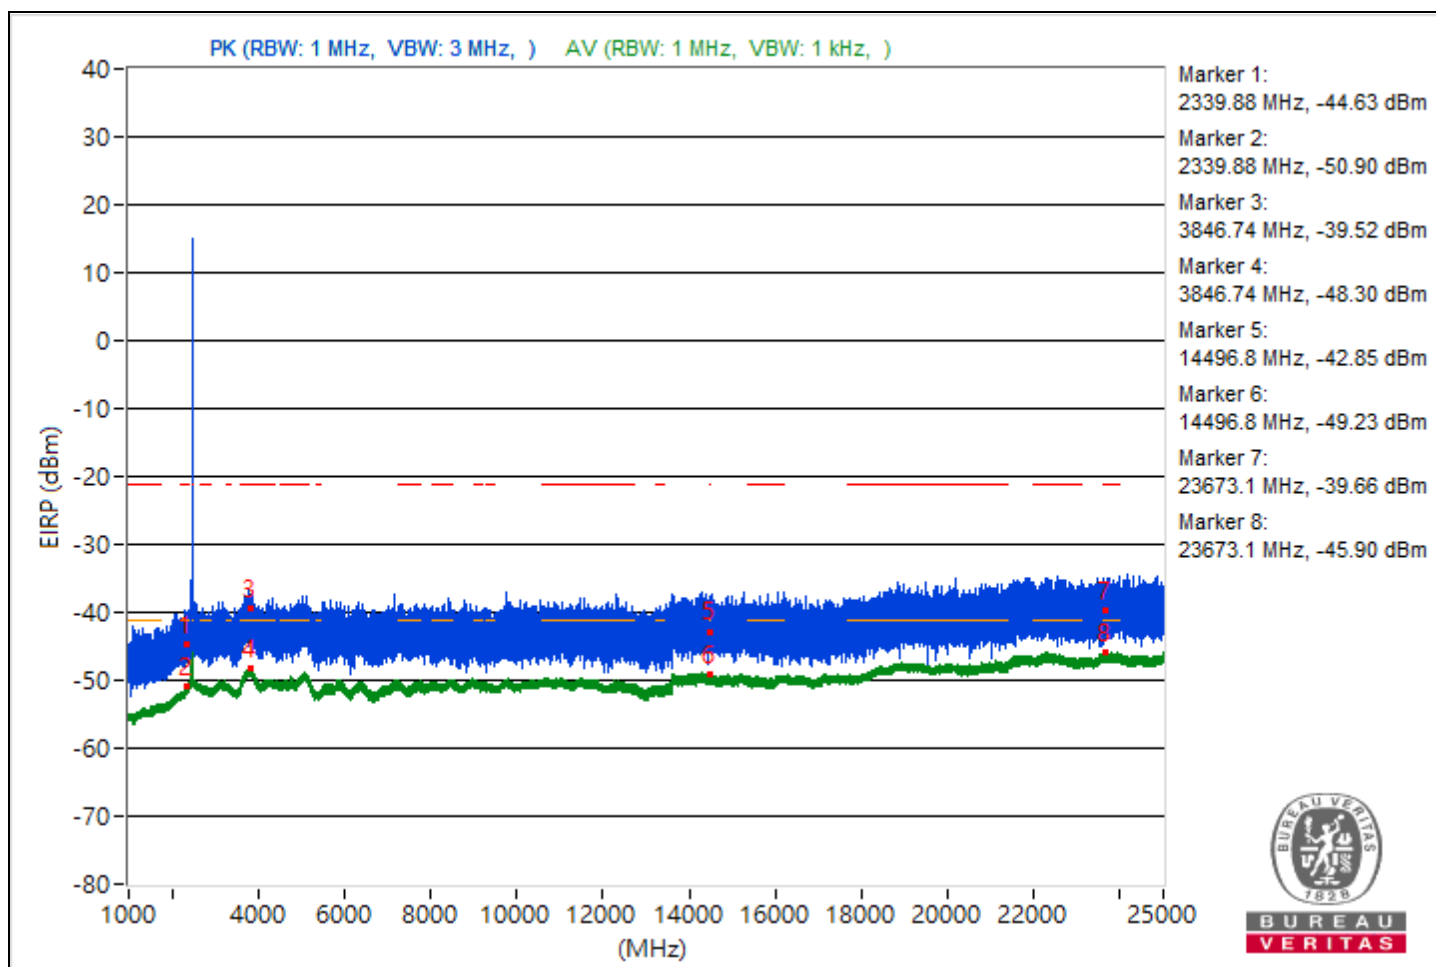

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.57	52.7 PK	74	-21.3	-50.93	8.37	-42.56
2	2339.57	46.78 AV	54	-7.22	-56.85	8.37	-48.48
3	3796.34	53.53 PK	74	-20.47	-50.1	8.37	-41.73
4	3796.34	47.1 AV	54	-6.9	-56.53	8.37	-48.16
5	14482.22	53.32 PK	74	-20.68	-50.31	8.37	-41.94
6	14482.22	46.12 AV	54	-7.88	-57.51	8.37	-49.14
7	23668.9	55.2 PK	74	-18.8	-48.43	8.37	-40.06
8	23668.9	49.33 AV	54	-4.67	-54.3	8.37	-45.93


Note: Margin value = Emission Level - Limit value

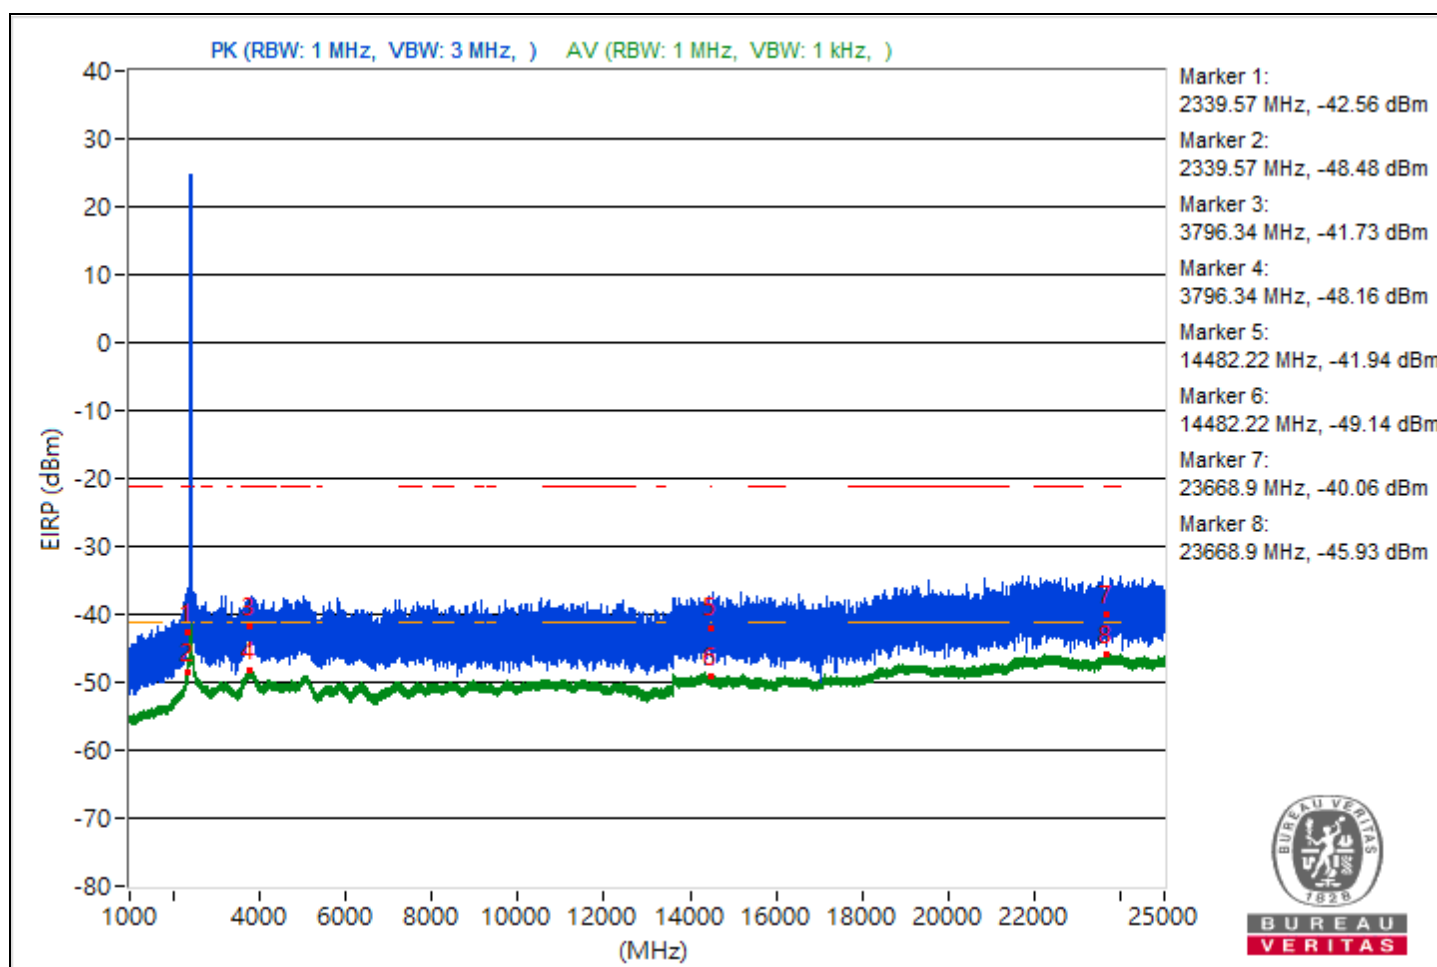

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.01	55.05 PK	74	-18.95	-48.58	8.37	-40.21
2	2338.01	46.74 AV	54	-7.26	-56.89	8.37	-48.52
3	3814	53.92 PK	74	-20.08	-49.71	8.37	-41.34
4	3814	47.16 AV	54	-6.84	-56.47	8.37	-48.1
5	14498.13	52.66 PK	74	-21.34	-50.97	8.37	-42.6
6	14498.13	46.04 AV	54	-7.96	-57.59	8.37	-49.22
7	22209.3	53.71 PK	74	-20.29	-49.92	8.37	-41.55
8	22209.3	49.28 AV	54	-4.72	-54.35	8.37	-45.98


Note: Margin value = Emission Level - Limit value

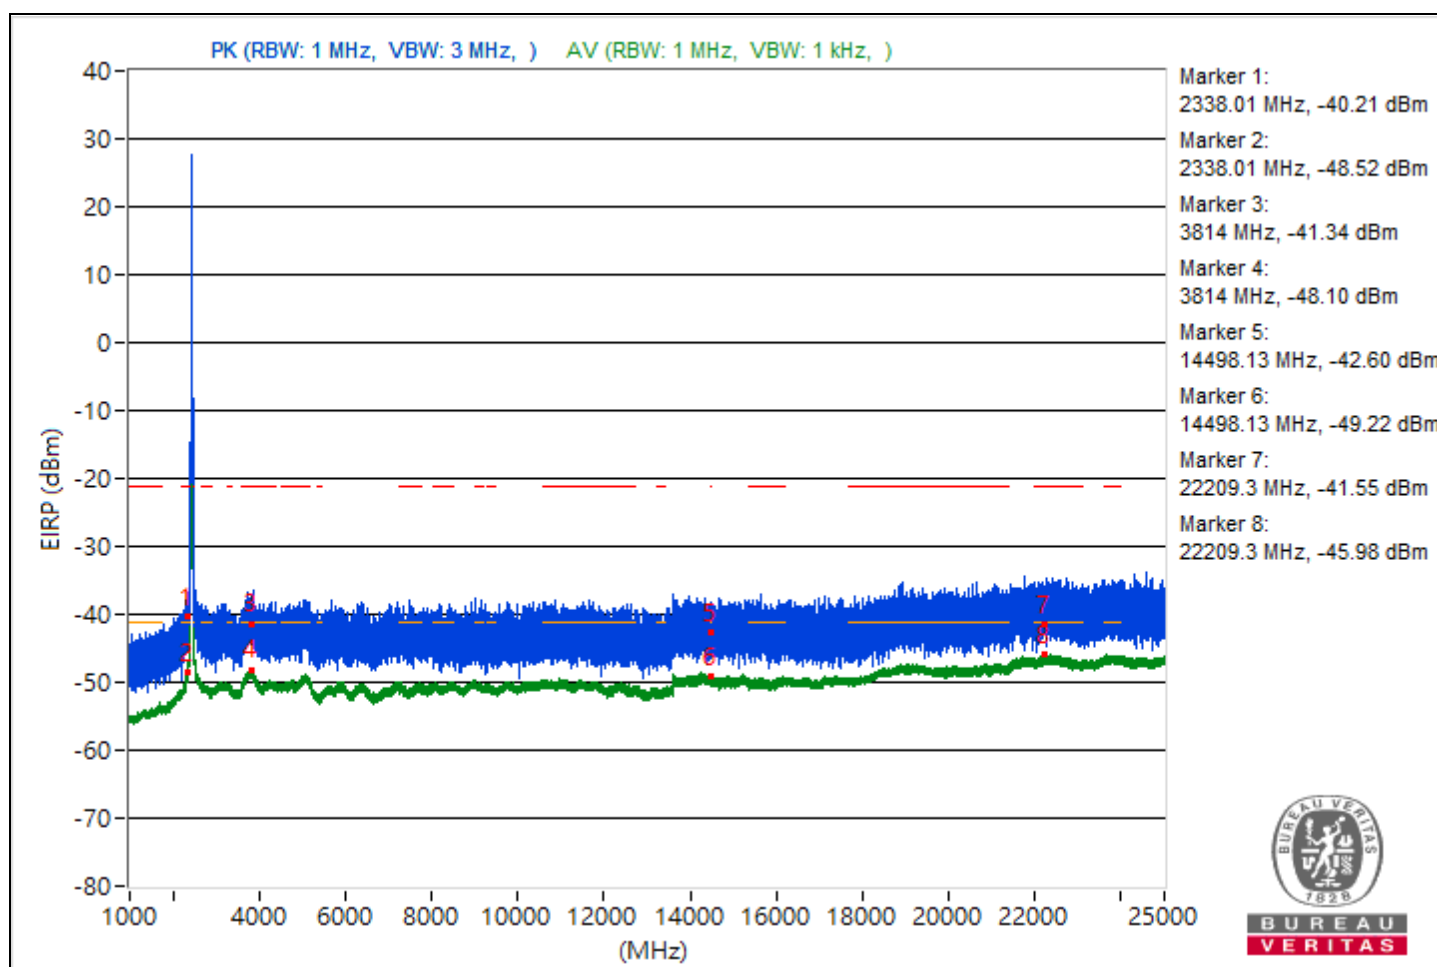

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2335.76	51.61 PK	74	-22.39	-52.02	8.37	-43.65
2	2335.76	45.61 AV	54	-8.39	-58.02	8.37	-49.65
3	3825.28	52.31 PK	74	-21.69	-51.32	8.37	-42.95
4	3825.28	47.04 AV	54	-6.96	-56.59	8.37	-48.22
5	14487.82	55.67 PK	74	-18.33	-47.96	8.37	-39.59
6	14487.82	45.99 AV	54	-8.01	-57.64	8.37	-49.27
7	23793	56.22 PK	74	-17.78	-47.41	8.37	-39.04
8	23793	49.45 AV	54	-4.55	-54.18	8.37	-45.81


Note: Margin value = Emission Level - Limit value

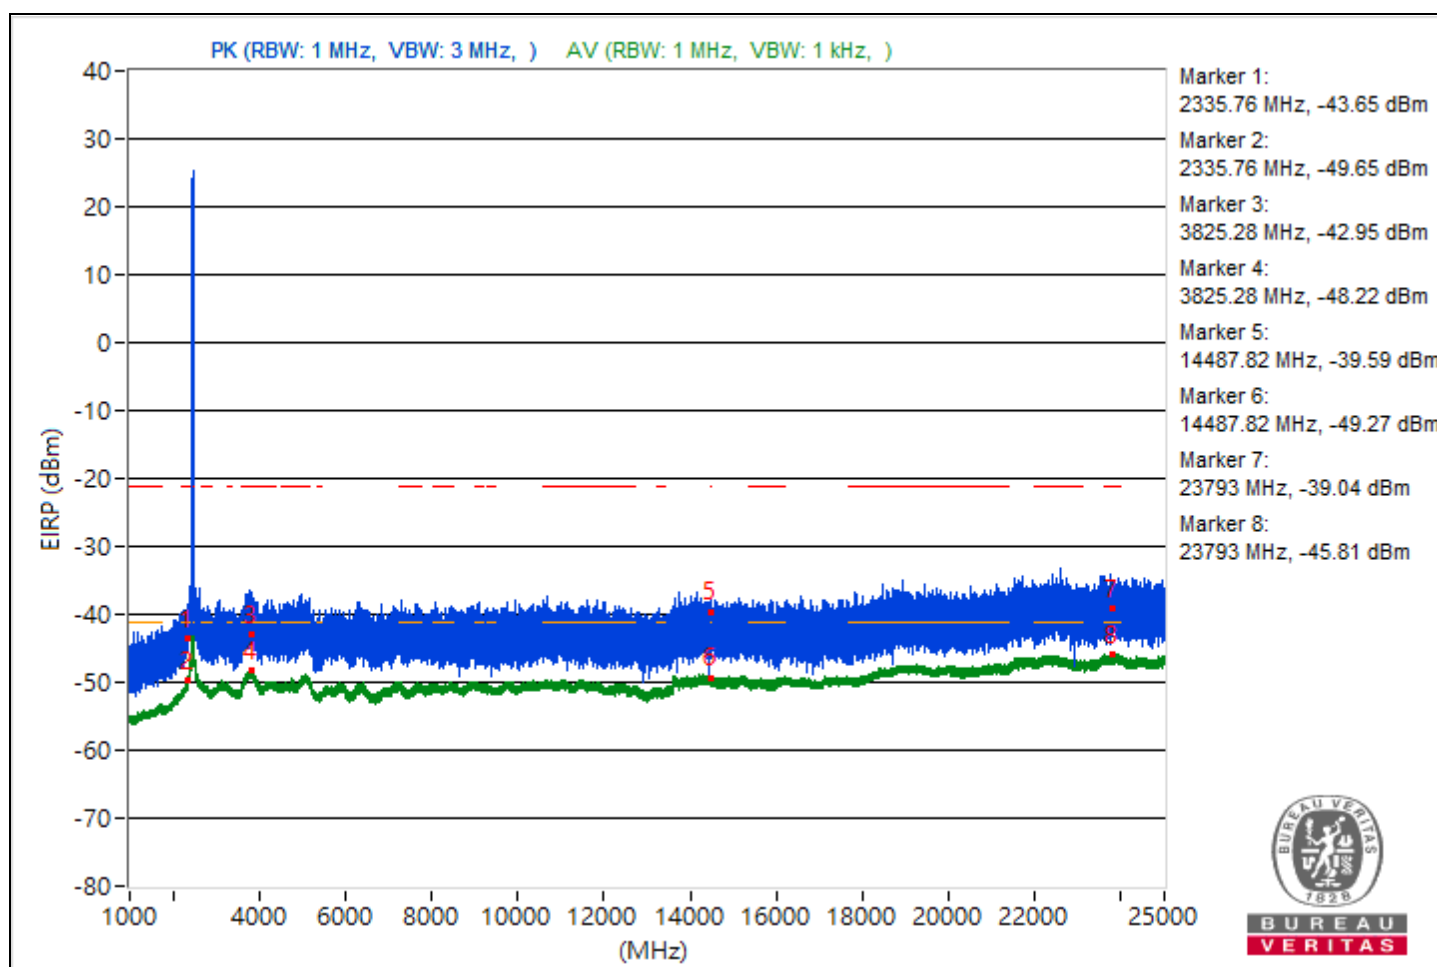

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.46	50.97 PK	74	-23.03	-52.66	8.37	-44.29
2	2336.46	45.45 AV	54	-8.55	-58.18	8.37	-49.81
3	3786	55.73 PK	74	-18.27	-47.9	8.37	-39.53
4	3786	47.17 AV	54	-6.83	-56.46	8.37	-48.09
5	14498.93	54.84 PK	74	-19.16	-48.79	8.37	-40.42
6	14498.93	45.98 AV	54	-8.02	-57.65	8.37	-49.28
7	22267.9	57.12 PK	74	-16.88	-46.51	8.37	-38.14
8	22267.9	49.34 AV	54	-4.66	-54.29	8.37	-45.92


Note: Margin value = Emission Level - Limit value

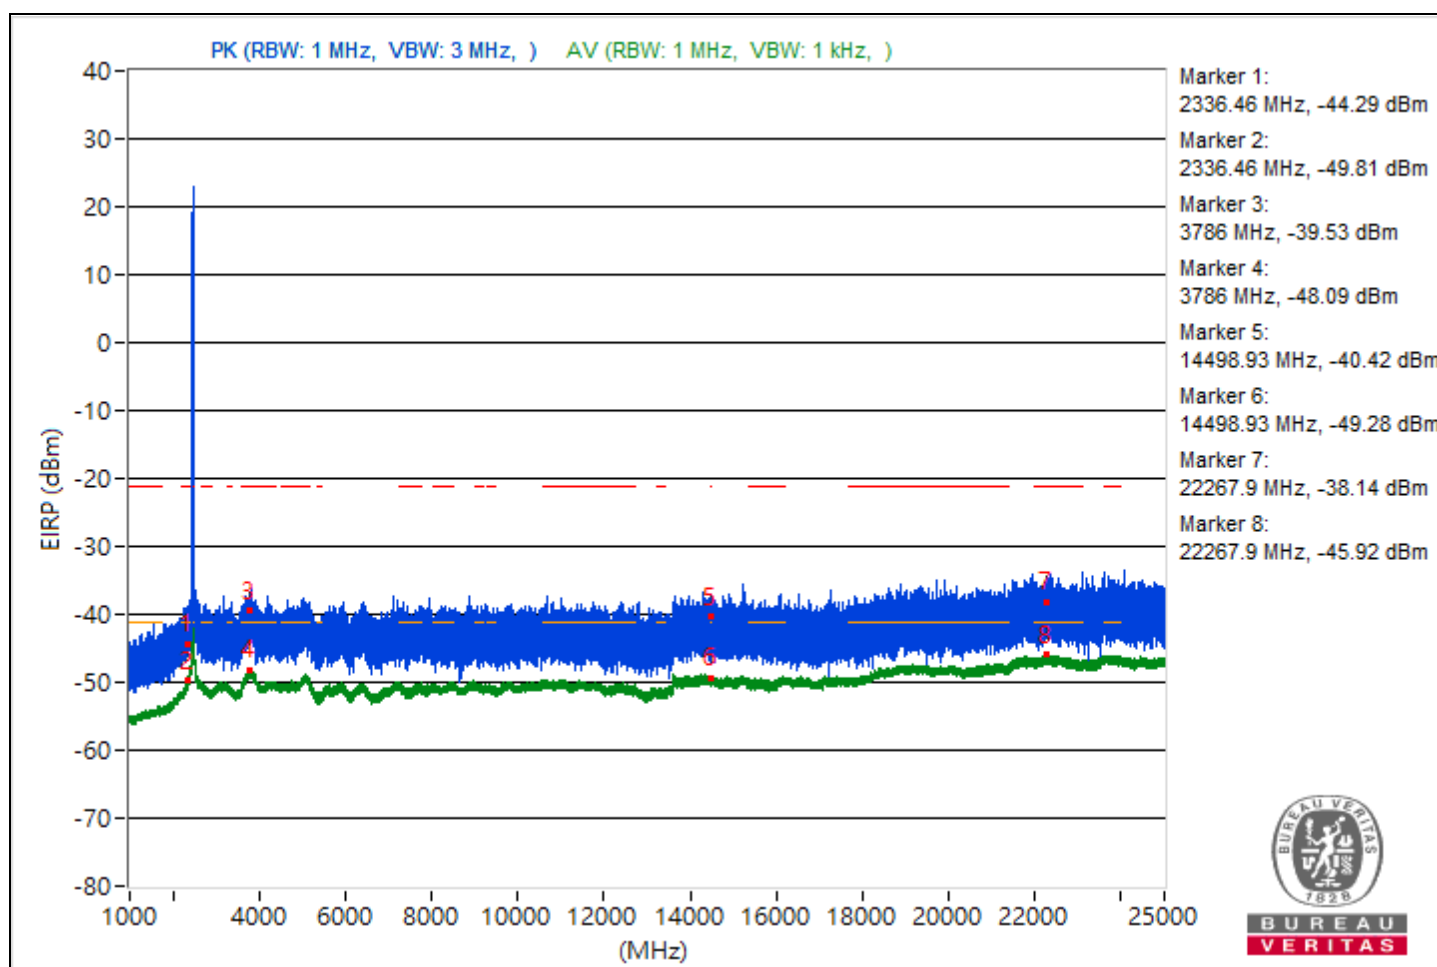

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.96	52.33 PK	74	-21.67	-51.3	8.37	-42.93
2	2339.96	45.13 AV	54	-8.87	-58.5	8.37	-50.13
3	3797.98	54.66 PK	74	-19.34	-48.97	8.37	-40.6
4	3797.98	47.05 AV	54	-6.95	-56.58	8.37	-48.21
5	14491.29	52.15 PK	74	-21.85	-51.48	8.37	-43.11
6	14491.29	46.1 AV	54	-7.9	-57.53	8.37	-49.16
7	23884.9	58.22 PK	74	-15.78	-45.41	8.37	-37.04
8	23884.9	49.32 AV	54	-4.68	-54.31	8.37	-45.94

Note: Margin value = Emission Level - Limit value

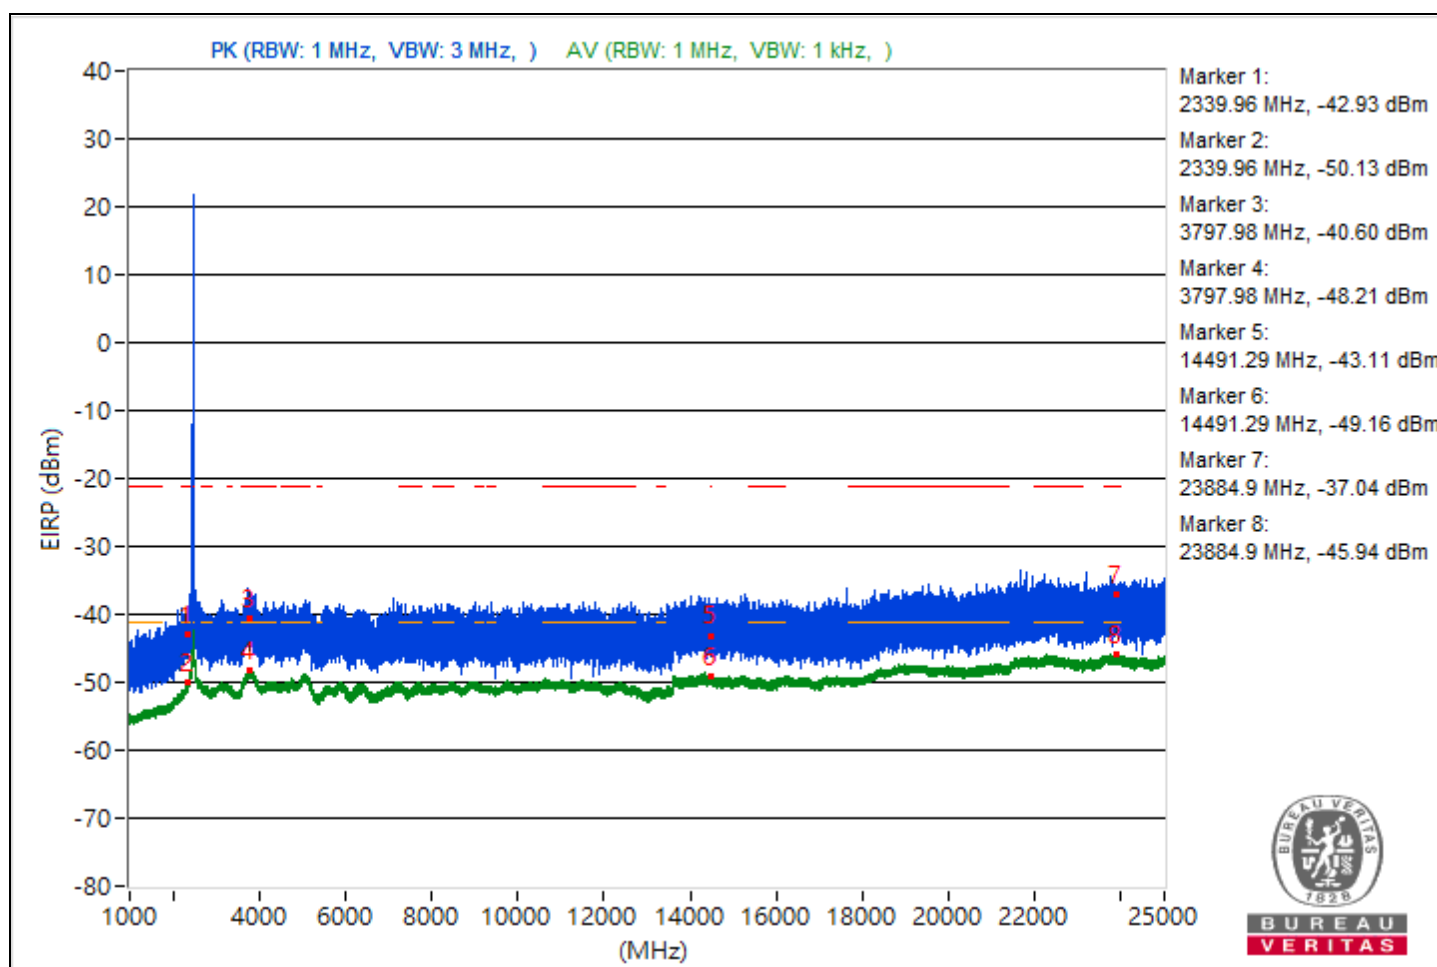


1S1T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.02	53.02 PK	74	-20.98	-50.61	8.37	-42.24
2	2339.02	46.71 AV	54	-7.29	-56.92	8.37	-48.55
3	3829.48	55.39 PK	74	-18.61	-48.24	8.37	-39.87
4	3829.48	47.35 AV	54	-6.65	-56.28	8.37	-47.91
5	14472.44	51.4 PK	74	-22.6	-52.23	8.37	-43.86
6	14472.44	46.14 AV	54	-7.86	-57.49	8.37	-49.12
7	23741.6	54.8 PK	74	-19.2	-48.83	8.37	-40.46
8	23741.6	49.32 AV	54	-4.68	-54.31	8.37	-45.94


Note: Margin value = Emission Level - Limit value

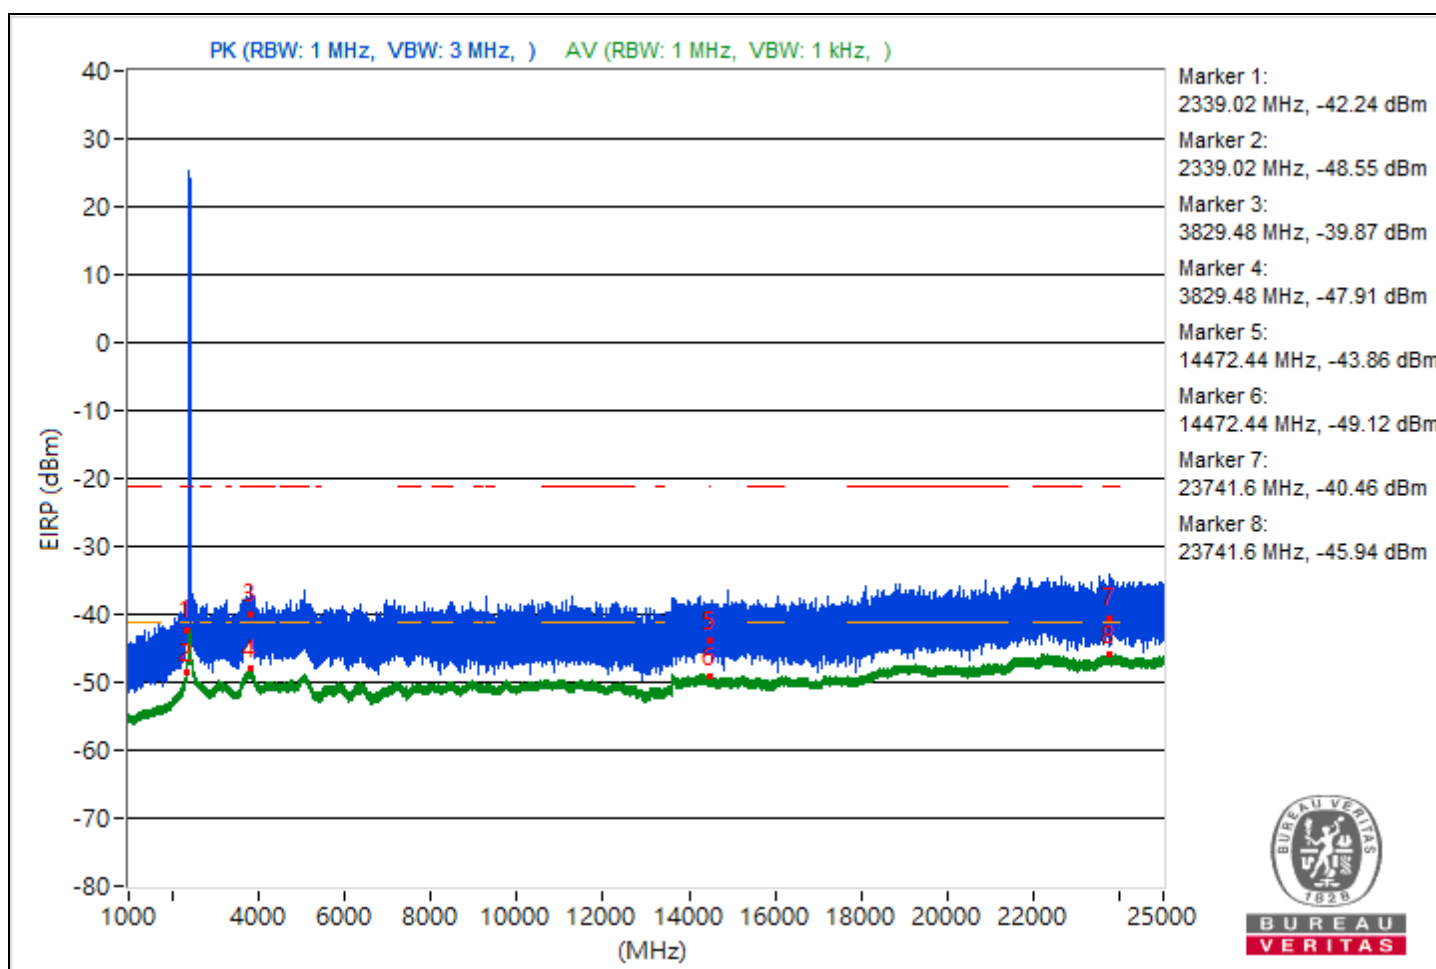

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.02	55.94 PK	74	-18.06	-47.69	8.37	-39.32
2	2339.02	46.63 AV	54	-7.37	-57	8.37	-48.63
3	3831.97	52.76 PK	74	-21.24	-50.87	8.37	-42.5
4	3831.97	47.07 AV	54	-6.93	-56.56	8.37	-48.19
5	14480.98	48.83 PK	74	-25.17	-54.8	8.37	-46.43
6	14480.98	46.13 AV	54	-7.87	-57.5	8.37	-49.13
7	22181.9	56.43 PK	74	-17.57	-47.2	8.37	-38.83
8	22181.9	49.4 AV	54	-4.6	-54.23	8.37	-45.86


Note: Margin value = Emission Level - Limit value

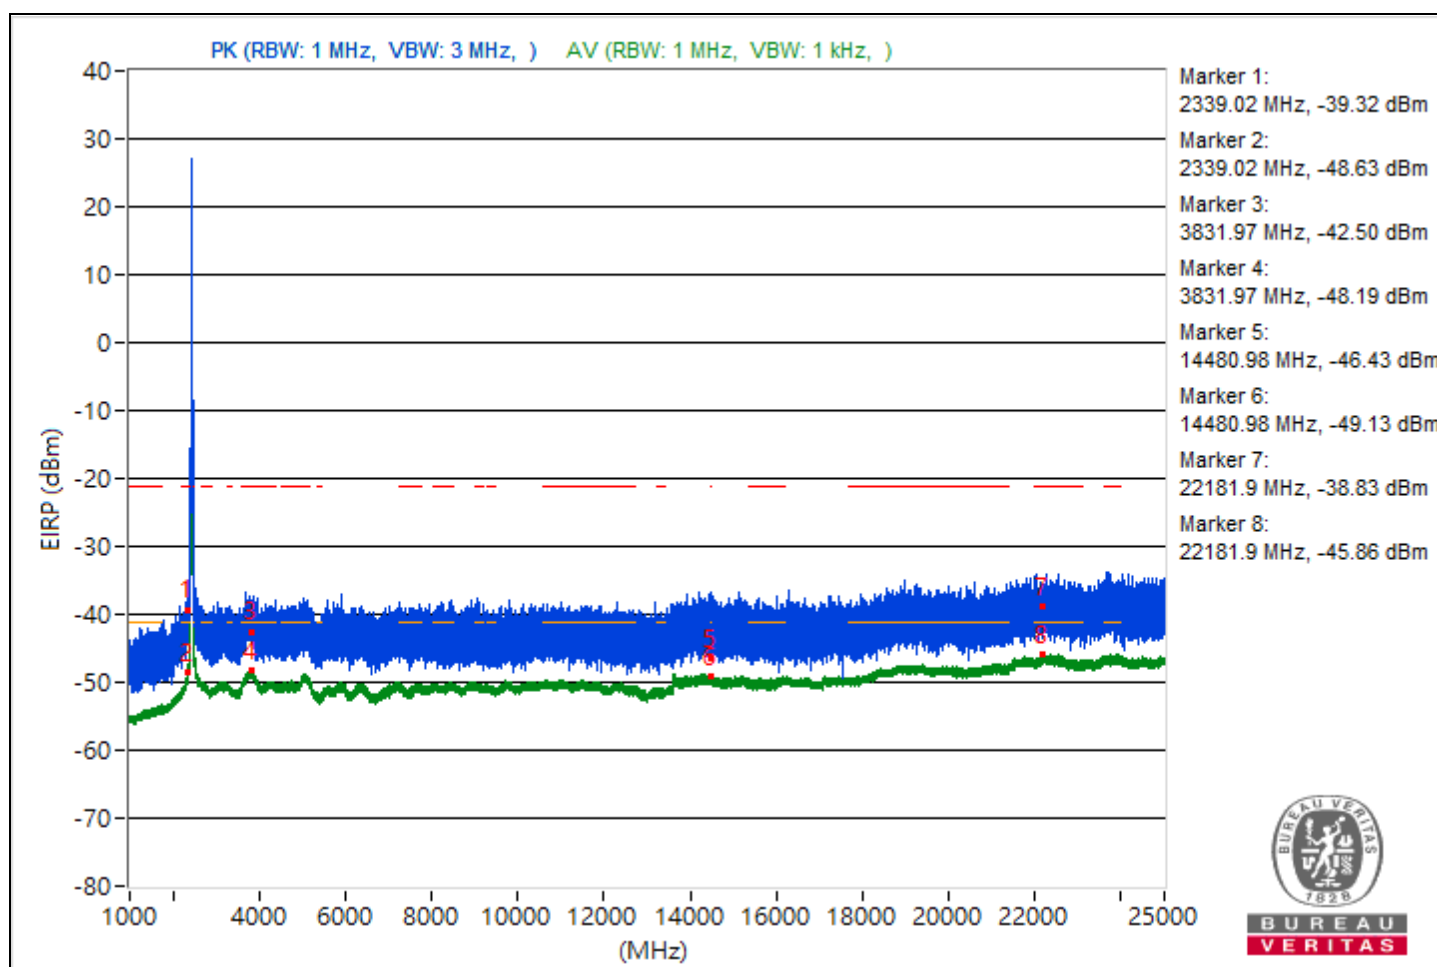

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.57	54.2 PK	74	-19.8	-49.43	8.37	-41.06
2	2339.57	45.6 AV	54	-8.4	-58.03	8.37	-49.66
3	3833.06	53.26 PK	74	-20.74	-50.37	8.37	-42
4	3833.06	47.03 AV	54	-6.97	-56.6	8.37	-48.23
5	14474.67	52.82 PK	74	-21.18	-50.81	8.37	-42.44
6	14474.67	46.03 AV	54	-7.97	-57.6	8.37	-49.23
7	22284.4	55.66 PK	74	-18.34	-47.97	8.37	-39.6
8	22284.4	49.47 AV	54	-4.53	-54.16	8.37	-45.79


Note: Margin value = Emission Level - Limit value

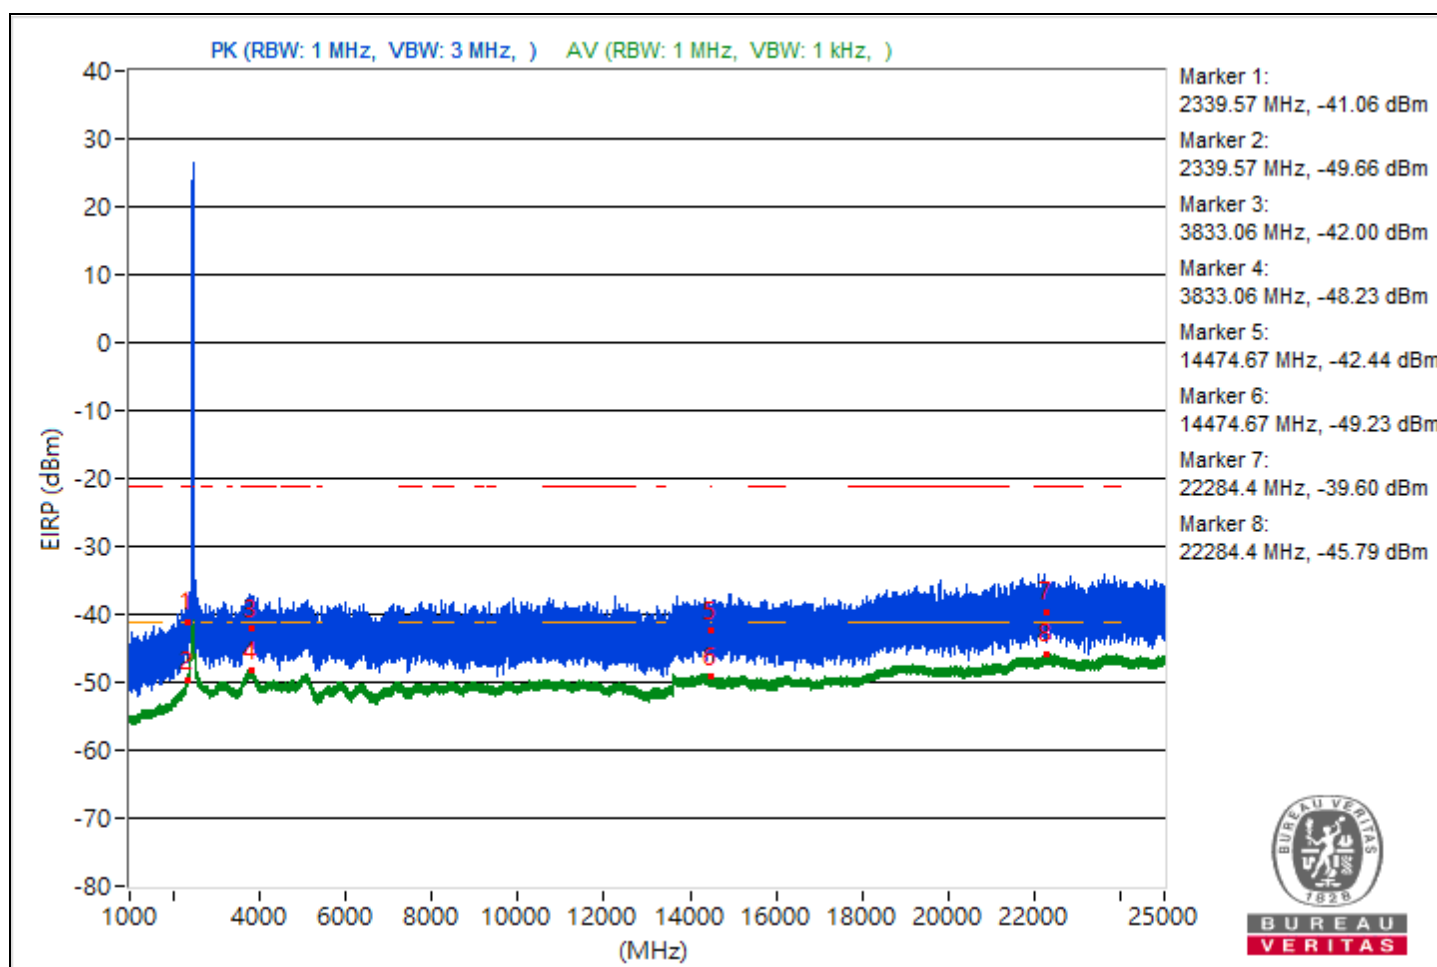

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.63	55.98 PK	74	-18.02	-47.65	8.37	-39.28
2	2338.63	45.3 AV	54	-8.7	-58.33	8.37	-49.96
3	3826.29	54.74 PK	74	-19.26	-48.89	8.37	-40.52
4	3826.29	47 AV	54	-7	-56.63	8.37	-48.26
5	14485.96	53.95 PK	74	-20.05	-49.68	8.37	-41.31
6	14485.96	45.96 AV	54	-8.04	-57.67	8.37	-49.3
7	23629.2	56.66 PK	74	-17.34	-46.97	8.37	-38.6
8	23629.2	49.34 AV	54	-4.66	-54.29	8.37	-45.92


Note: Margin value = Emission Level - Limit value

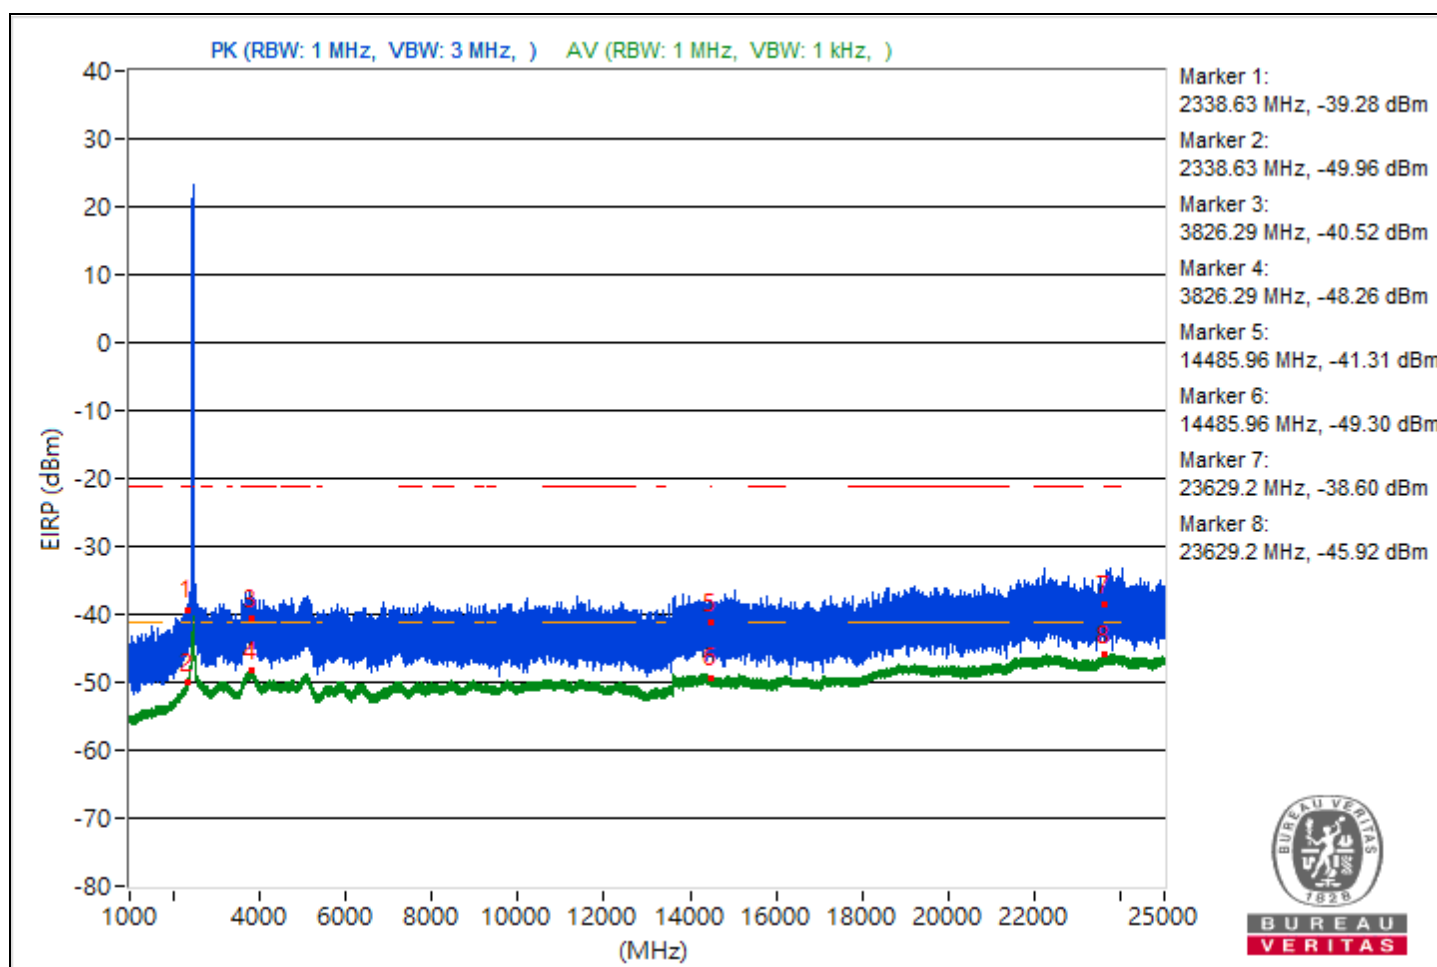

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.26	52.44 PK	74	-21.56	-51.19	8.37	-42.82
2	2339.26	45.28 AV	54	-8.72	-58.35	8.37	-49.98
3	3835.78	56.17 PK	74	-17.83	-47.46	8.37	-39.09
4	3835.78	47.08 AV	54	-6.92	-56.55	8.37	-48.18
5	14488.71	54.33 PK	74	-19.67	-49.3	8.37	-40.93
6	14488.71	45.97 AV	54	-8.03	-57.66	8.37	-49.29
7	22219.5	55.42 PK	74	-18.58	-48.21	8.37	-39.84
8	22219.5	49.26 AV	54	-4.74	-54.37	8.37	-46


Note: Margin value = Emission Level - Limit value

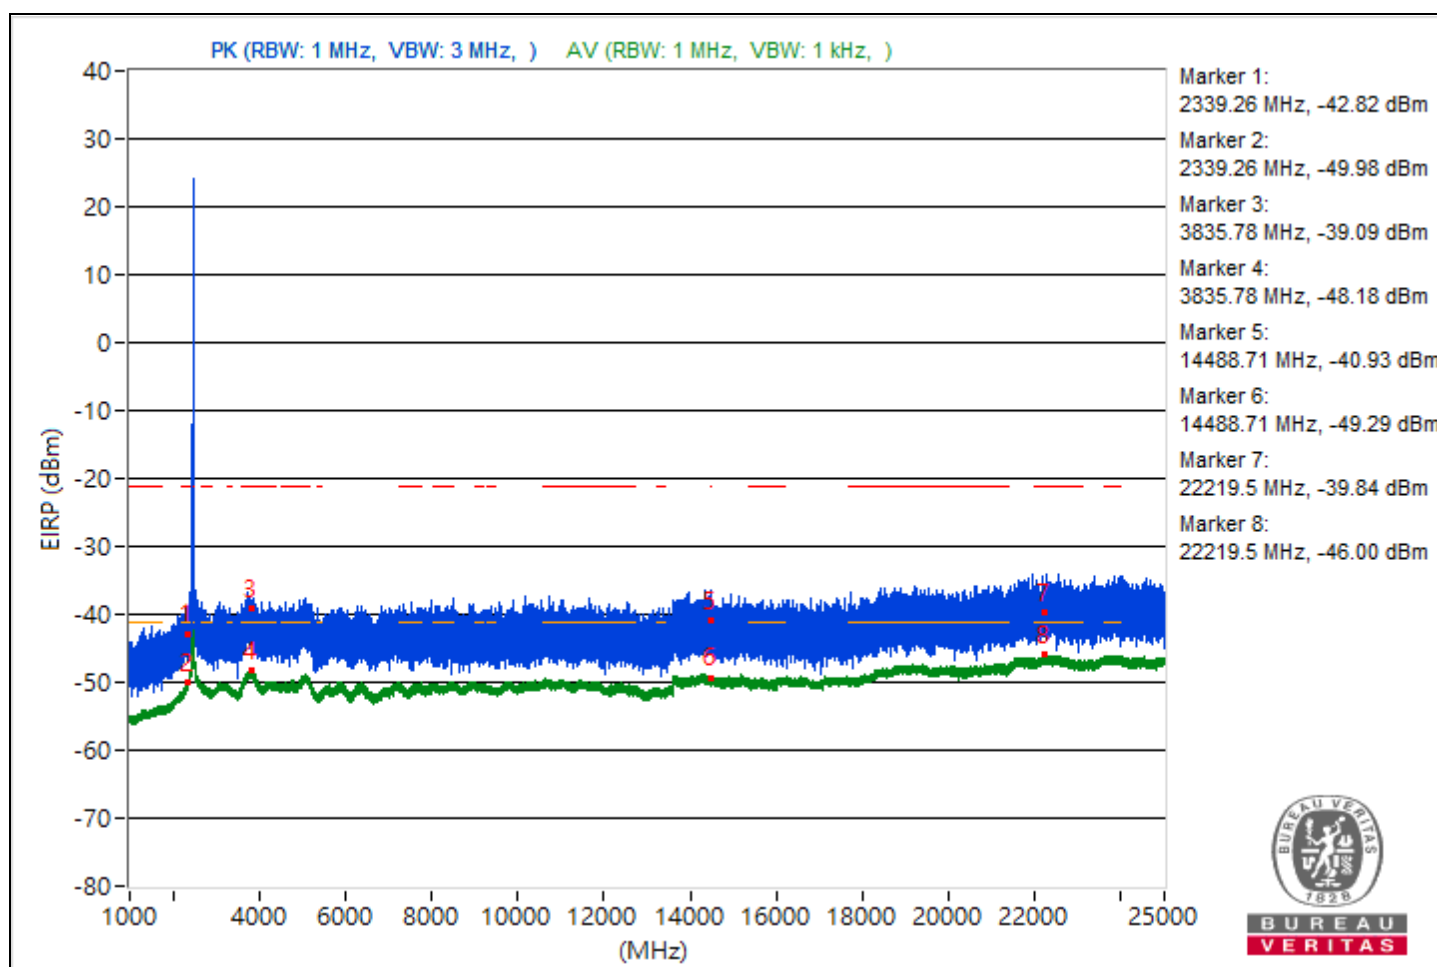

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.72	53.13 PK	74	-20.87	-50.5	8.37	-42.13
2	2339.72	46.53 AV	54	-7.47	-57.1	8.37	-48.73
3	3803.81	53.79 PK	74	-20.21	-49.84	8.37	-41.47
4	3803.81	47.25 AV	54	-6.75	-56.38	8.37	-48.01
5	15529.51	50.9 PK	74	-23.1	-52.73	8.37	-44.36
6	15529.51	46.11 AV	54	-7.89	-57.52	8.37	-49.15
7	23909	56.4 PK	74	-17.6	-47.23	8.37	-38.86
8	23909	49.41 AV	54	-4.59	-54.22	8.37	-45.85


Note: Margin value = Emission Level - Limit value

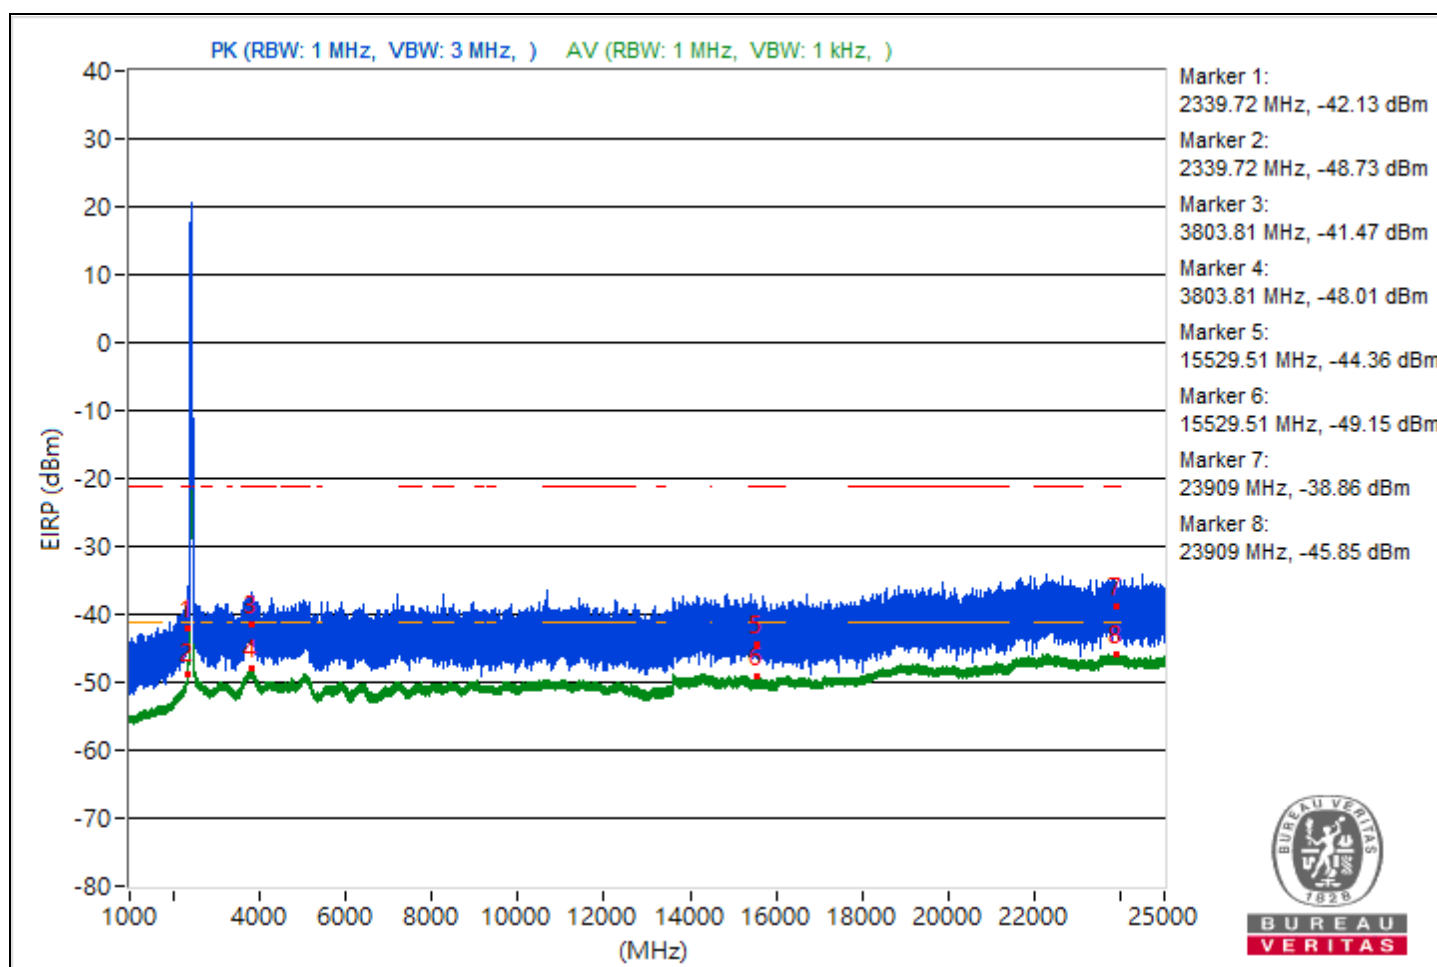

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.39	53.19 PK	74	-20.81	-50.44	8.37	-42.07
2	2337.39	46.49 AV	54	-7.51	-57.14	8.37	-48.77
3	3797.98	55.18 PK	74	-18.82	-48.45	8.37	-40.08
4	3797.98	47.07 AV	54	-6.93	-56.56	8.37	-48.19
5	14471.56	51.91 PK	74	-22.09	-51.72	8.37	-43.35
6	14471.56	46.01 AV	54	-7.99	-57.62	8.37	-49.25
7	23880.1	54.45 PK	74	-19.55	-49.18	8.37	-40.81
8	23880.1	49.42 AV	54	-4.58	-54.21	8.37	-45.84


Note: Margin value = Emission Level - Limit value

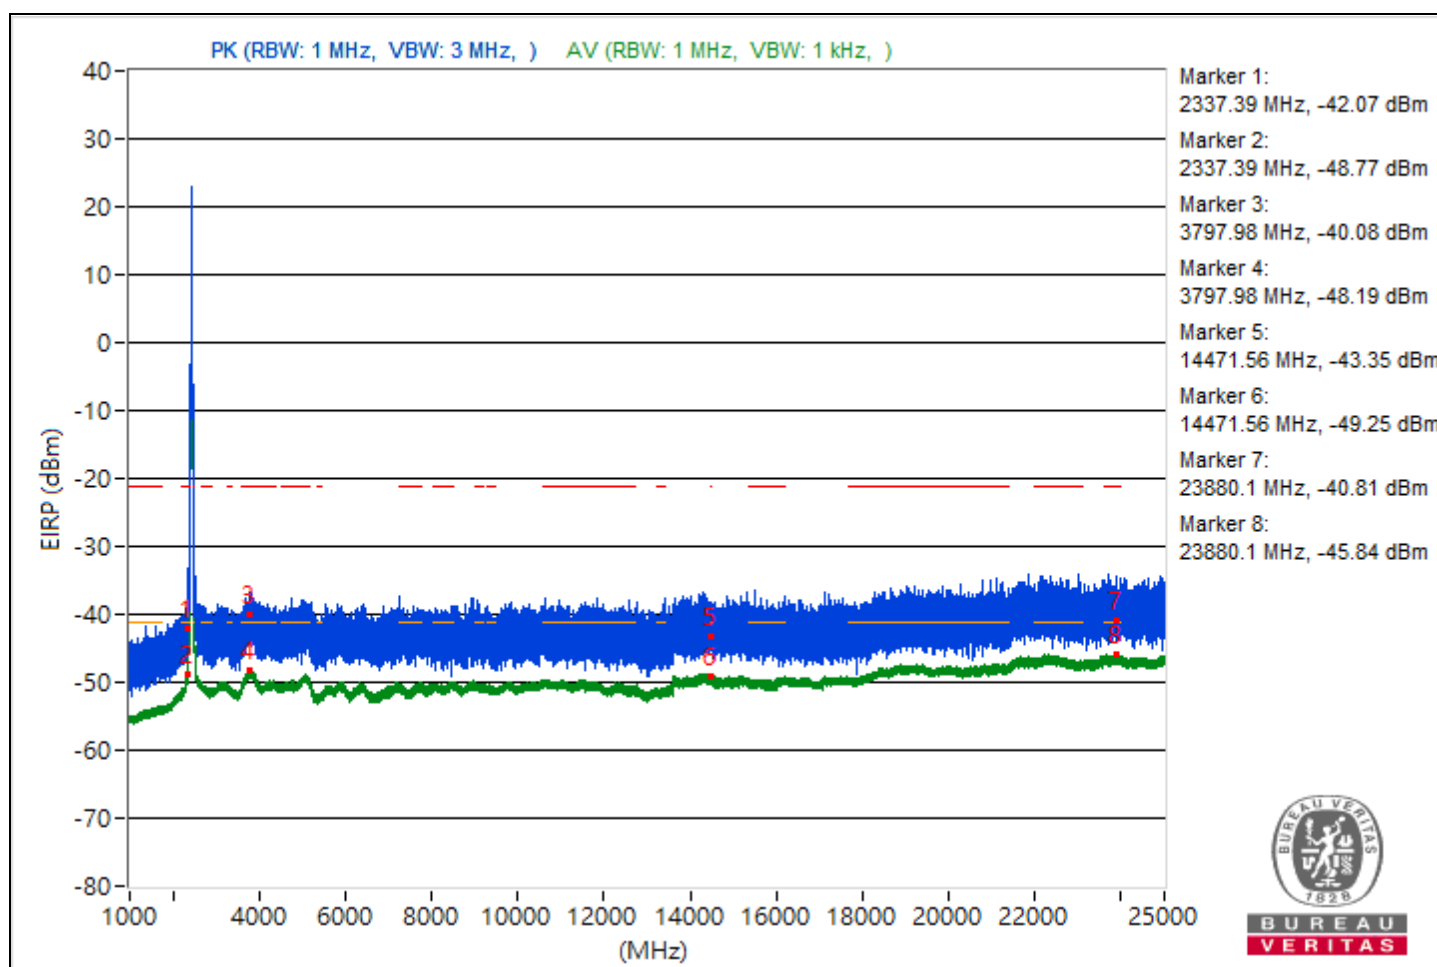

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.84	51.97 PK	74	-22.03	-51.66	8.37	-43.29
2	2336.84	45.46 AV	54	-8.54	-58.17	8.37	-49.8
3	3804.98	56.95 PK	74	-17.05	-46.68	8.37	-38.31
4	3804.98	47.04 AV	54	-6.96	-56.59	8.37	-48.22
5	14498.58	53.1 PK	74	-20.9	-50.53	8.37	-42.16
6	14498.58	45.98 AV	54	-8.02	-57.65	8.37	-49.28
7	23925.8	54.78 PK	74	-19.22	-48.85	8.37	-40.48
8	23925.8	49.3 AV	54	-4.7	-54.33	8.37	-45.96


Note: Margin value = Emission Level - Limit value

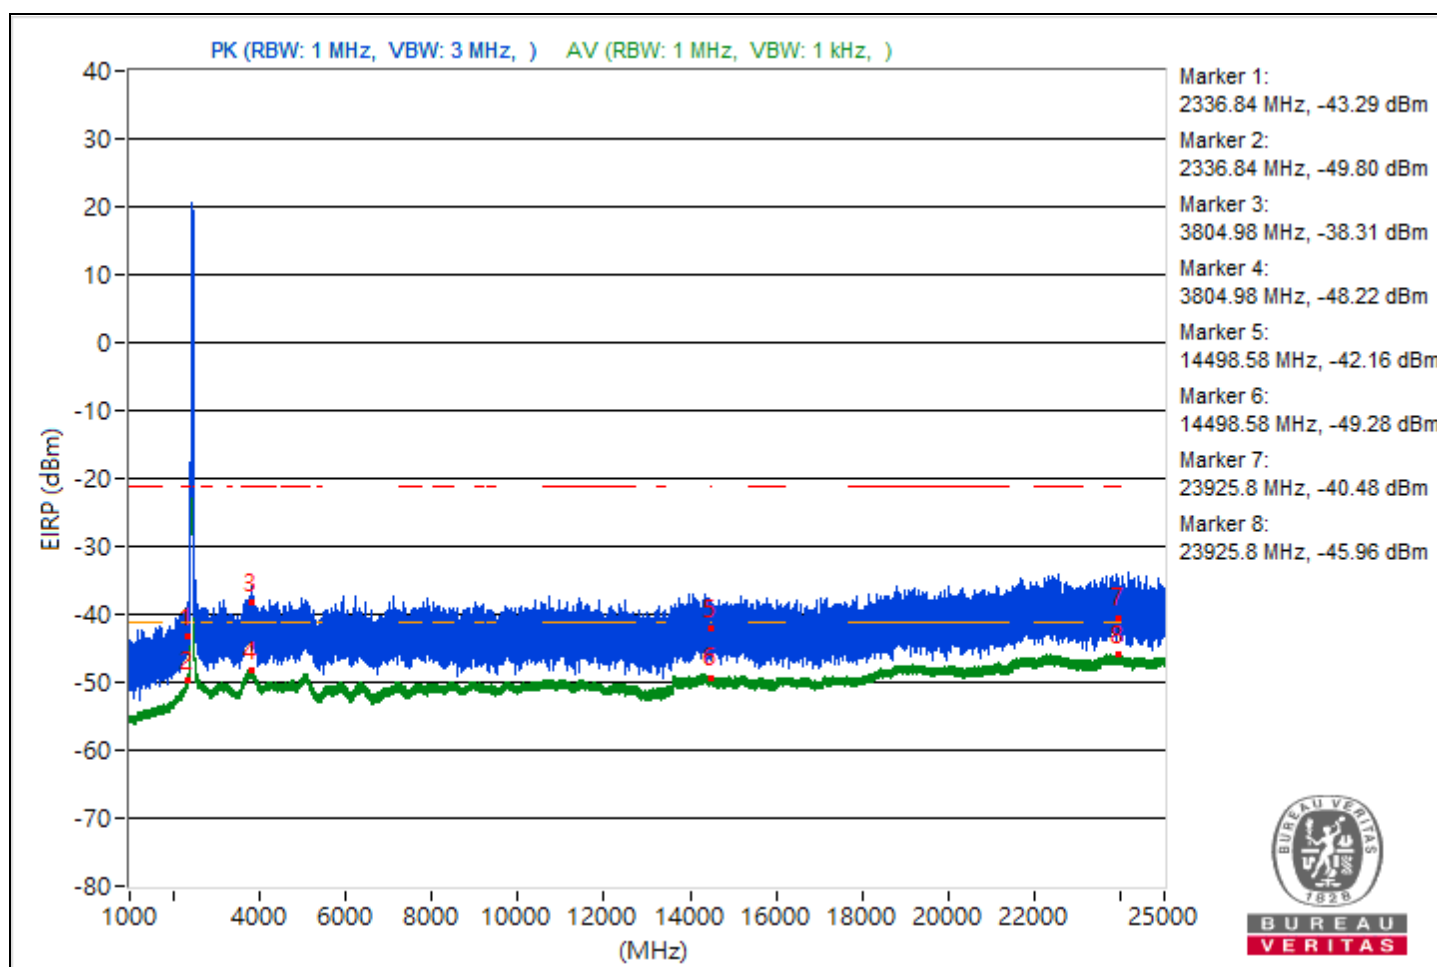

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.24	55.22 PK	74	-18.78	-48.41	8.37	-40.04
2	2338.24	45.77 AV	54	-8.23	-57.86	8.37	-49.49
3	3807.86	54.41 PK	74	-19.59	-49.22	8.37	-40.85
4	3807.86	47.14 AV	54	-6.86	-56.49	8.37	-48.12
5	14494.13	52.09 PK	74	-21.91	-51.54	8.37	-43.17
6	14494.13	46.01 AV	54	-7.99	-57.62	8.37	-49.25
7	23674.2	56.93 PK	74	-17.07	-46.7	8.37	-38.33
8	23674.2	49.37 AV	54	-4.63	-54.26	8.37	-45.89


Note: Margin value = Emission Level - Limit value

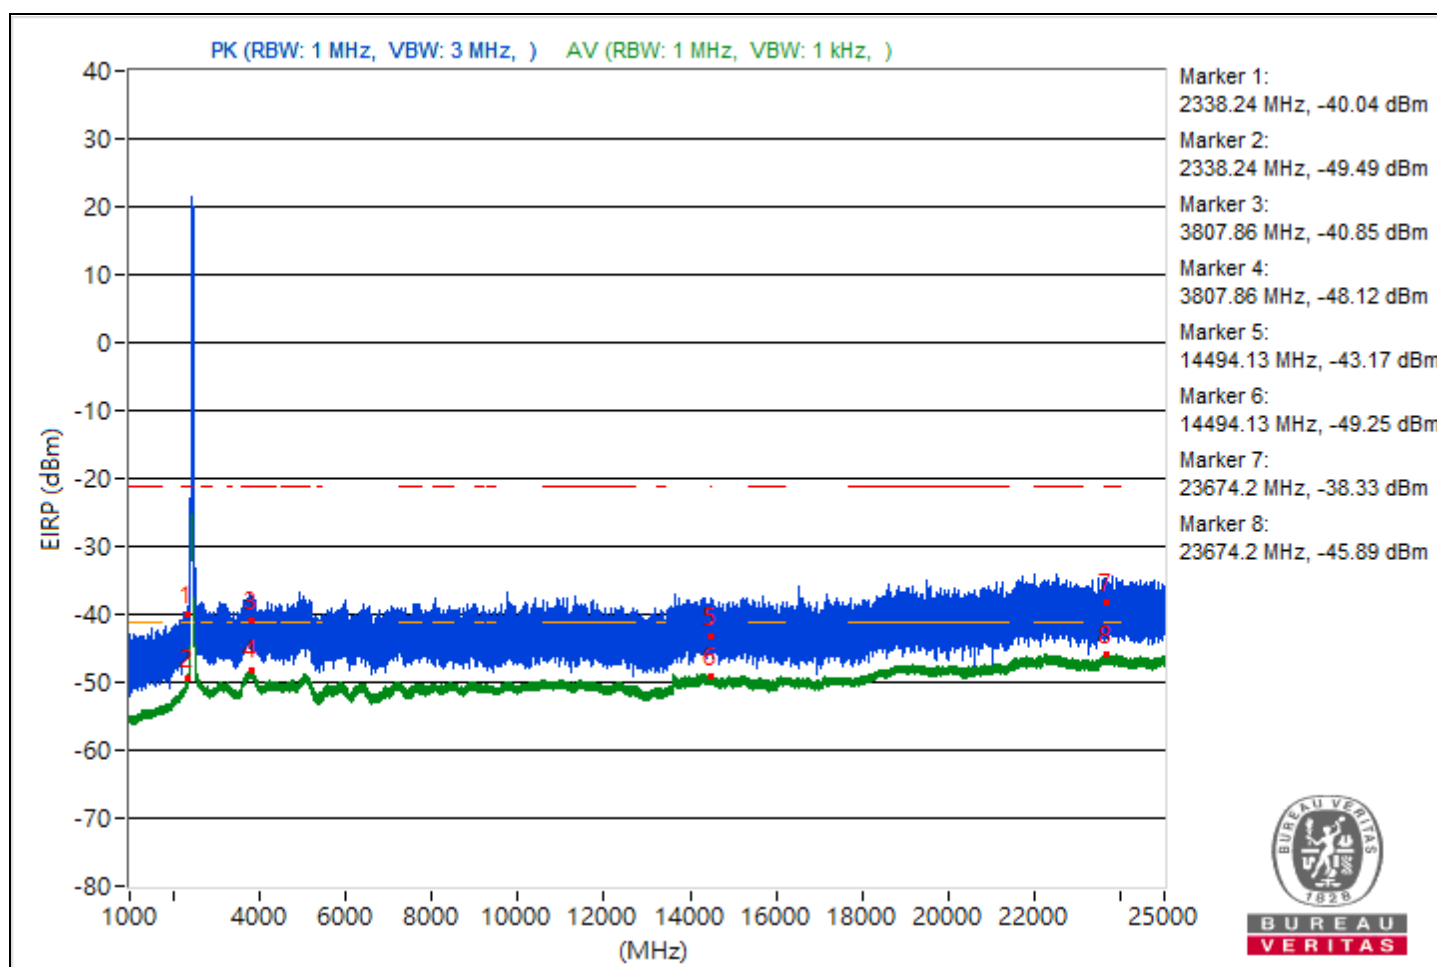

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.78	53.55 PK	74	-20.45	-50.08	8.37	-41.71
2	2337.78	45.38 AV	54	-8.62	-58.25	8.37	-49.88
3	3775.58	55.74 PK	74	-18.26	-47.89	8.37	-39.52
4	3775.58	47.02 AV	54	-6.98	-56.61	8.37	-48.24
5	14472.62	52.88 PK	74	-21.12	-50.75	8.37	-42.38
6	14472.62	45.99 AV	54	-8.01	-57.64	8.37	-49.27
7	23624.7	56.13 PK	74	-17.87	-47.5	8.37	-39.13
8	23624.7	49.39 AV	54	-4.61	-54.24	8.37	-45.87


Note: Margin value = Emission Level - Limit value

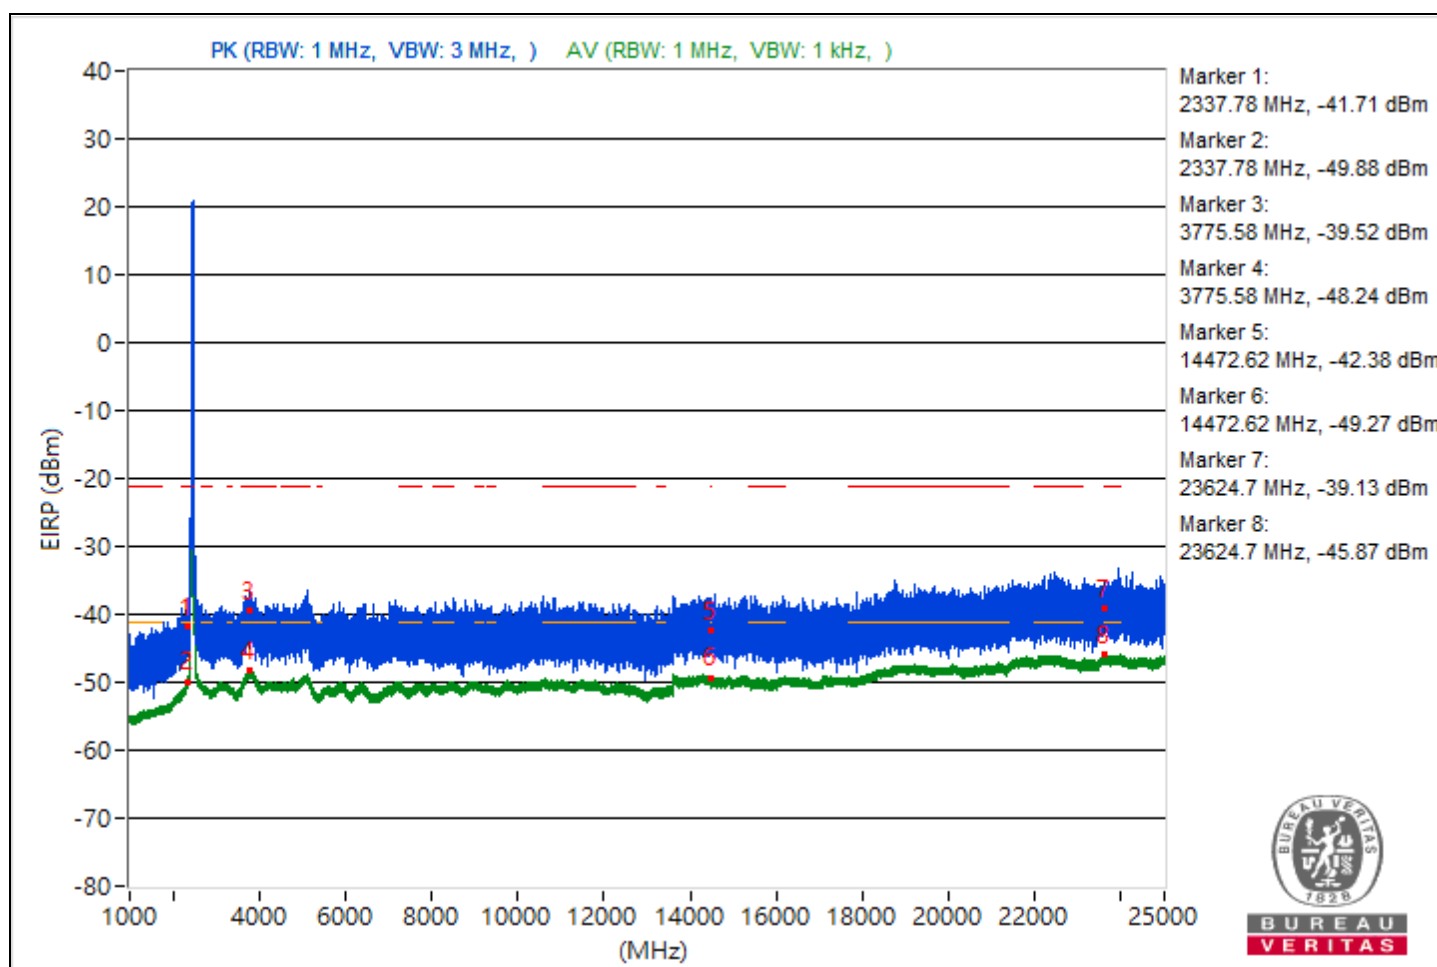

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.54	53.59 PK	74	-20.41	-50.04	8.37	-41.67
2	2337.54	46.37 AV	54	-7.63	-57.26	8.37	-48.89
3	3814.31	56.09 PK	74	-17.91	-47.54	8.37	-39.17
4	3814.31	47.07 AV	54	-6.93	-56.56	8.37	-48.19
5	14470.84	51.48 PK	74	-22.52	-52.15	8.37	-43.78
6	14470.84	46.08 AV	54	-7.92	-57.55	8.37	-49.18
7	23863.7	56.49 PK	74	-17.51	-47.14	8.37	-38.77
8	23863.7	49.35 AV	54	-4.65	-54.28	8.37	-45.91


Note: Margin value = Emission Level - Limit value

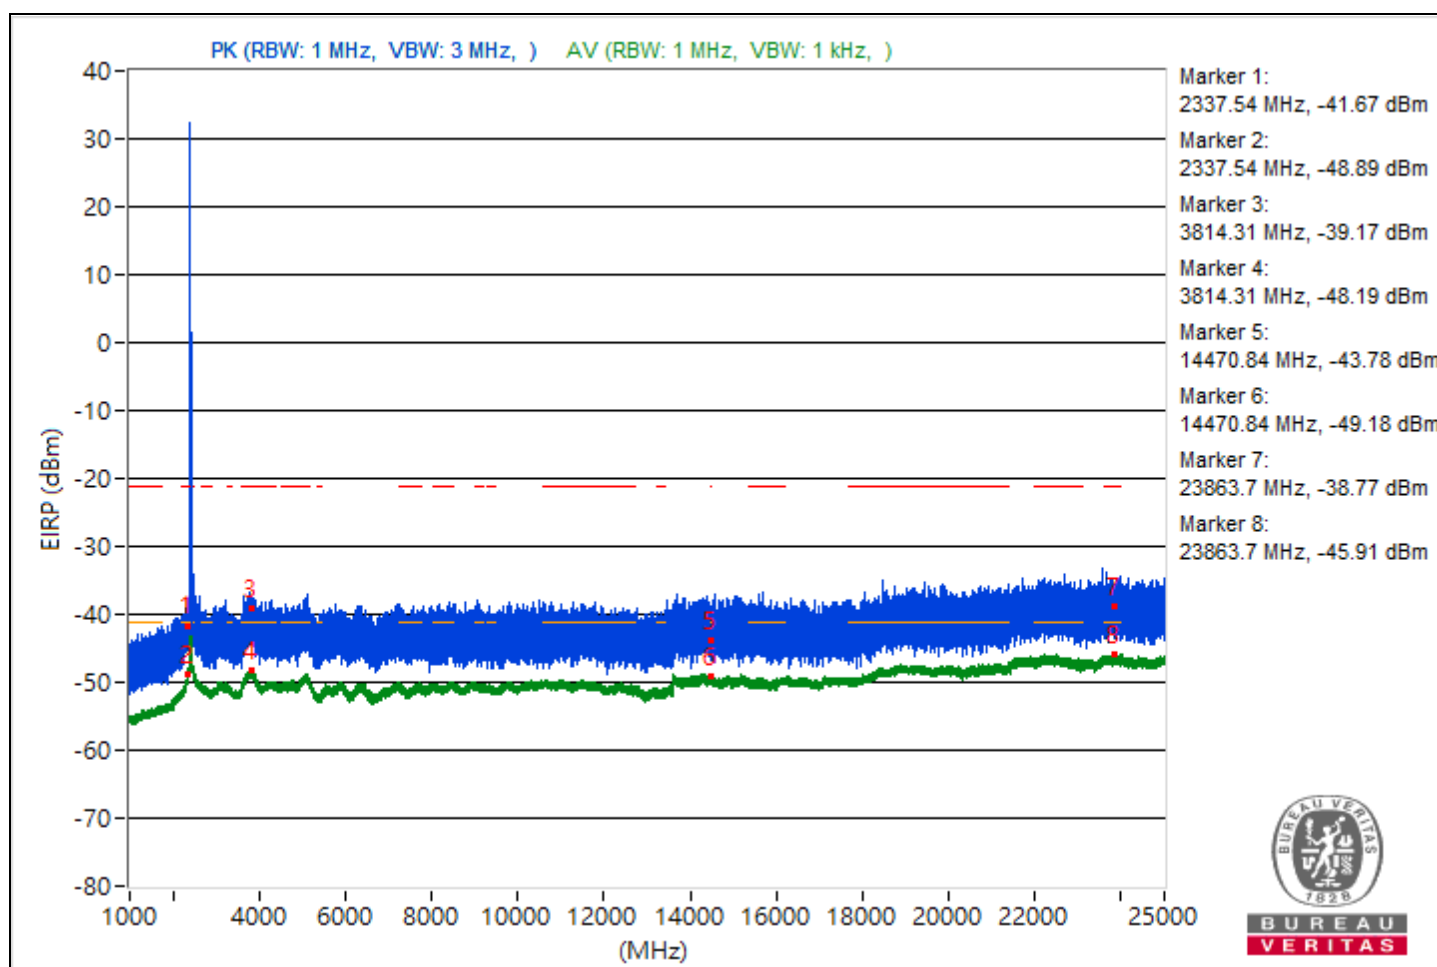

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.93	53.14 PK	74	-20.86	-50.49	8.37	-42.12
2	2337.93	46.26 AV	54	-7.74	-57.37	8.37	-49
3	3776.2	54.7 PK	74	-19.3	-48.93	8.37	-40.56
4	3776.2	47.03 AV	54	-6.97	-56.6	8.37	-48.23
5	14492	55.01 PK	74	-18.99	-48.62	8.37	-40.25
6	14492	46.34 AV	54	-7.66	-57.29	8.37	-48.92
7	23710.7	56.64 PK	74	-17.36	-46.99	8.37	-38.62
8	23710.7	49.45 AV	54	-4.55	-54.18	8.37	-45.81


Note: Margin value = Emission Level - Limit value

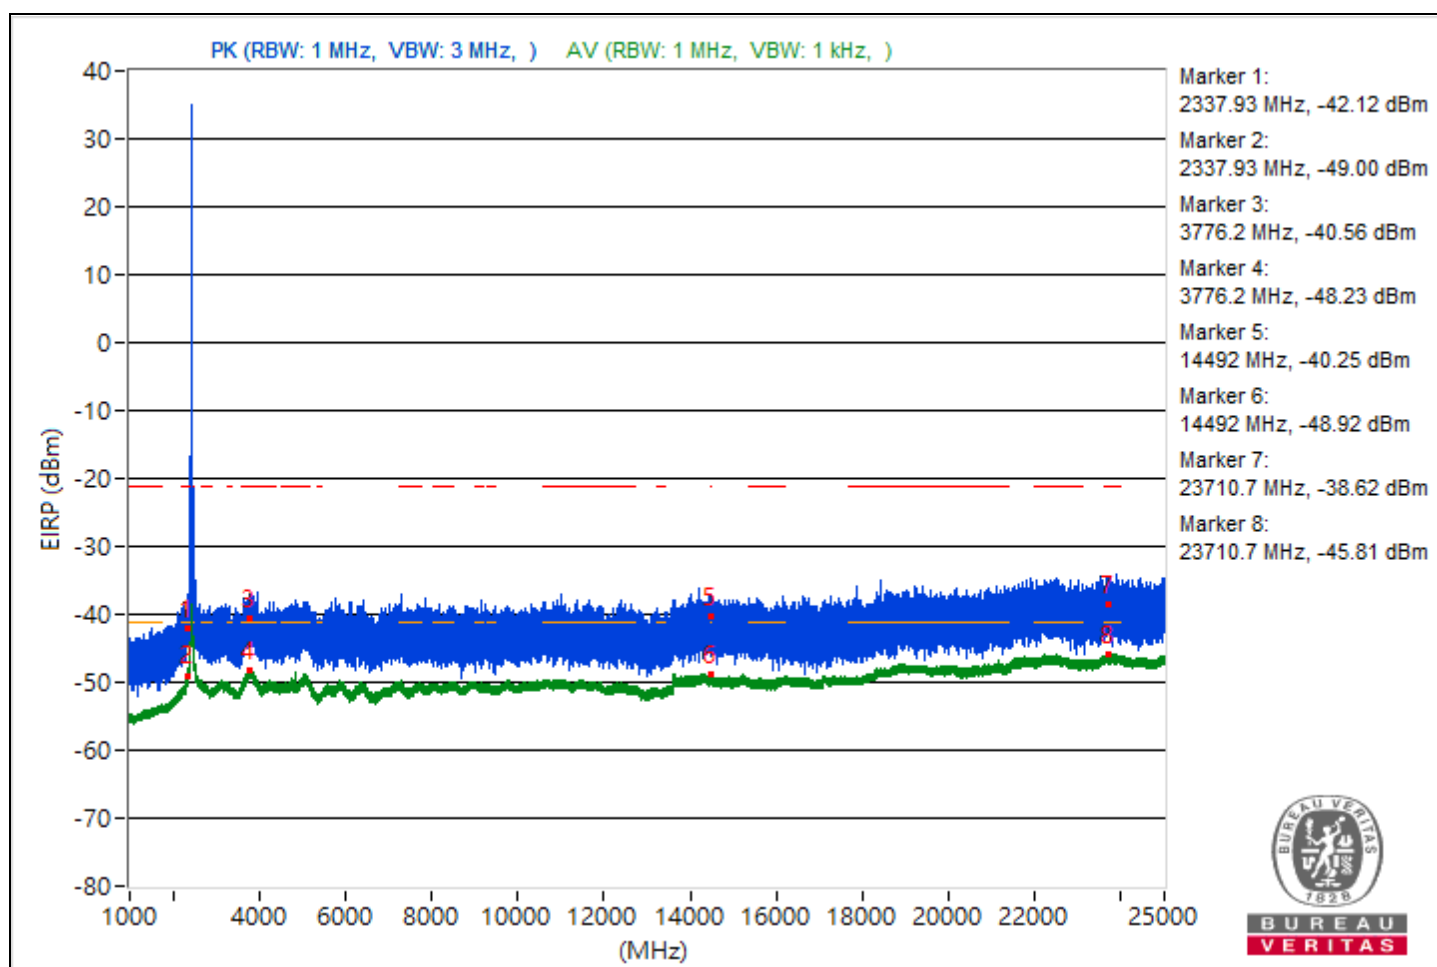

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.02	52.54 PK	74	-21.46	-51.09	8.37	-42.72
2	2339.02	45.32 AV	54	-8.68	-58.31	8.37	-49.94
3	3831.81	53.36 PK	74	-20.64	-50.27	8.37	-41.9
4	3831.81	47.1 AV	54	-6.9	-56.53	8.37	-48.16
5	14483.38	56.16 PK	74	-17.84	-47.47	8.37	-39.1
6	14483.38	46.15 AV	54	-7.85	-57.48	8.37	-49.11
7	22275	53.95 PK	74	-20.05	-49.68	8.37	-41.31
8	22275	49.44 AV	54	-4.56	-54.19	8.37	-45.82


Note: Margin value = Emission Level - Limit value

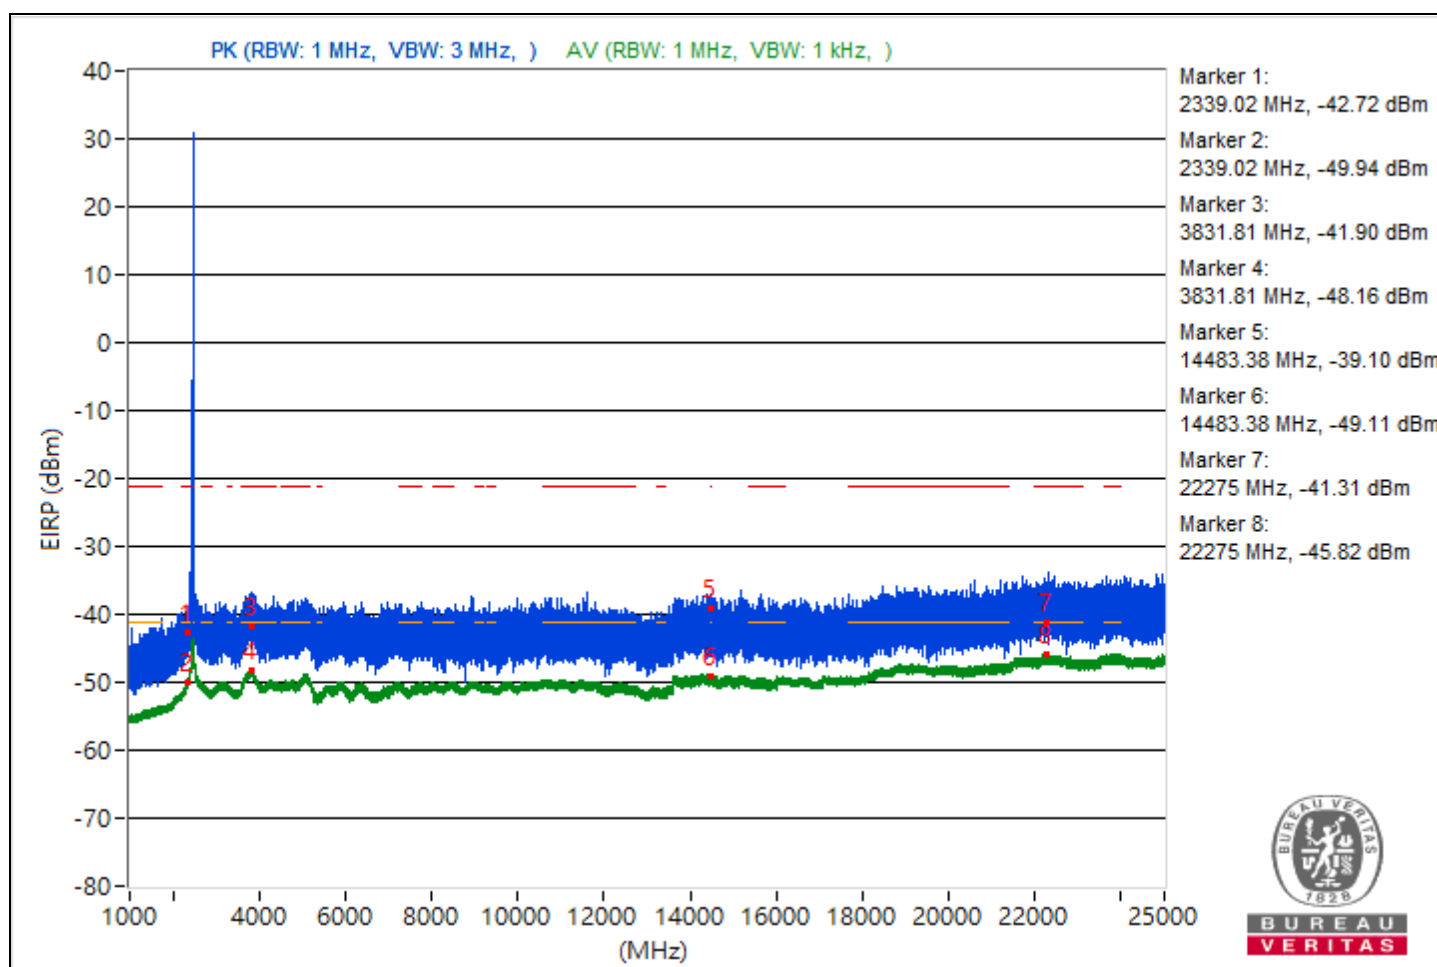

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.57	53.61 PK	74	-20.39	-50.02	8.37	-41.65
2	2339.57	45.52 AV	54	-8.48	-58.11	8.37	-49.74
3	3816.8	57.16 PK	74	-16.84	-46.47	8.37	-38.1
4	3816.8	47.15 AV	54	-6.85	-56.48	8.37	-48.11
5	14495.11	54.59 PK	74	-19.41	-49.04	8.37	-40.67
6	14495.11	46.16 AV	54	-7.84	-57.47	8.37	-49.1
7	23755.4	54.93 PK	74	-19.07	-48.7	8.37	-40.33
8	23755.4	49.36 AV	54	-4.64	-54.27	8.37	-45.9


Note: Margin value = Emission Level - Limit value

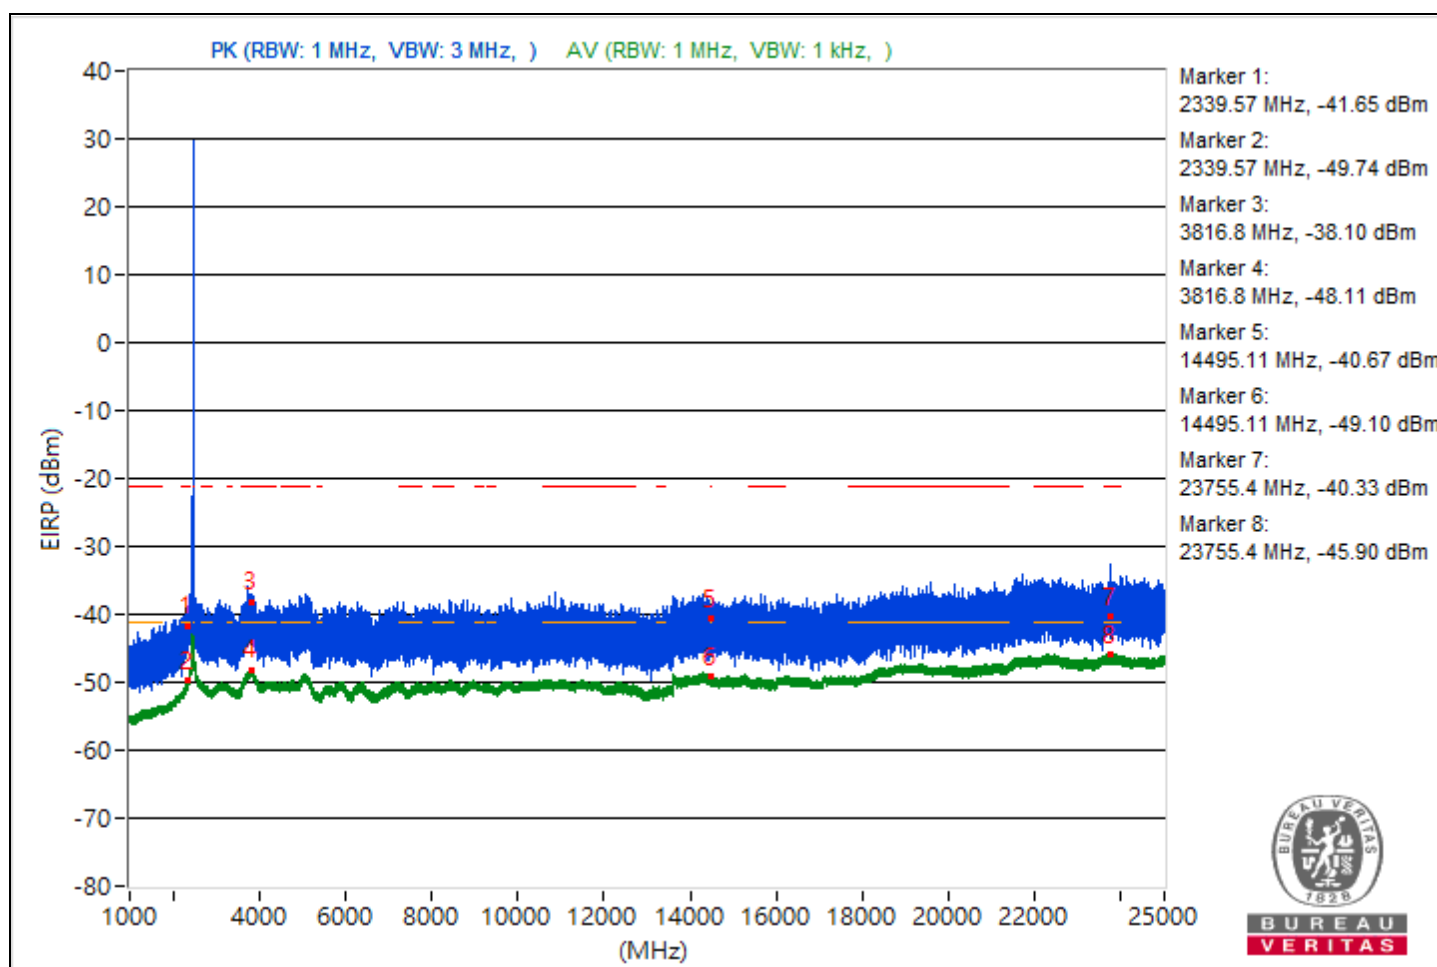

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	23°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2318.57	52.3 PK	74	-21.7	-51.33	8.37	-42.96
2	2318.57	44.38 AV	54	-9.62	-59.25	8.37	-50.88
3	3806.61	56.33 PK	74	-17.67	-47.3	8.37	-38.93
4	3806.61	49.19 AV	54	-4.81	-54.44	8.37	-46.07
5	14477.51	53.6 PK	74	-20.4	-50.03	8.37	-41.66
6	14477.51	46.99 AV	54	-7.01	-56.64	8.37	-48.27
7	23931.4	53.05 PK	74	-20.95	-50.58	8.37	-42.21
8	23931.4	50.52 AV	54	-3.48	-53.11	8.37	-44.74


Note: Margin value = Emission Level - Limit value

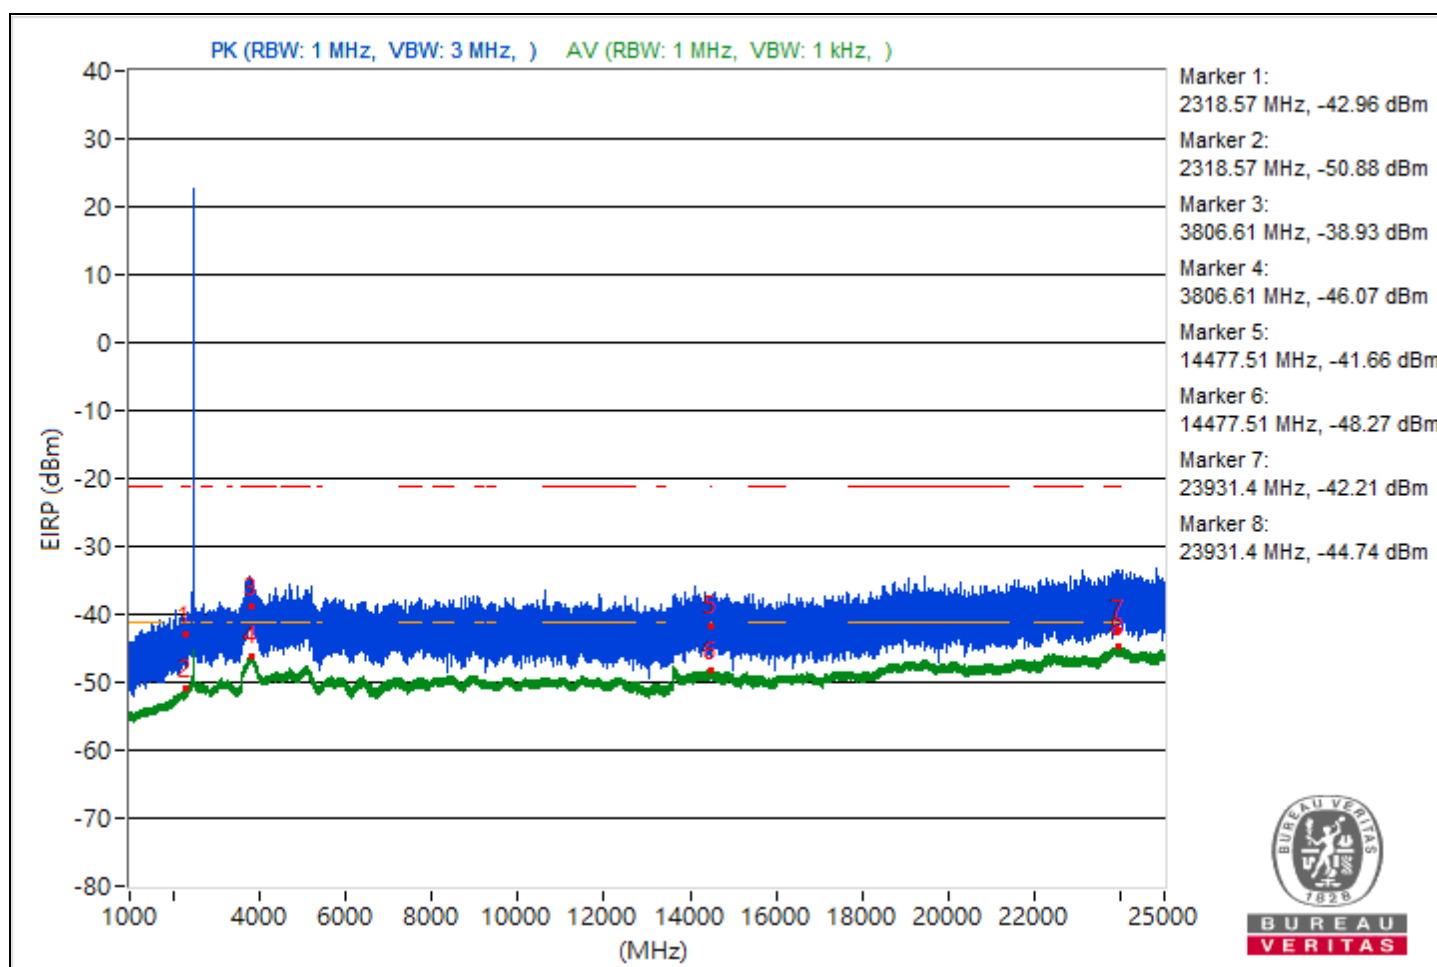

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.72	53.63 PK	74	-20.37	-50	8.37	-41.63
2	2339.72	46.39 AV	54	-7.61	-57.24	8.37	-48.87
3	3812.37	54 PK	74	-20	-49.63	8.37	-41.26
4	3812.37	47.13 AV	54	-6.87	-56.5	8.37	-48.13
5	14484	53 PK	74	-21	-50.63	8.37	-42.26
6	14484	46.07 AV	54	-7.93	-57.56	8.37	-49.19
7	23764.2	57.55 PK	74	-16.45	-46.08	8.37	-37.71
8	23764.2	49.38 AV	54	-4.62	-54.25	8.37	-45.88


Note: Margin value = Emission Level - Limit value

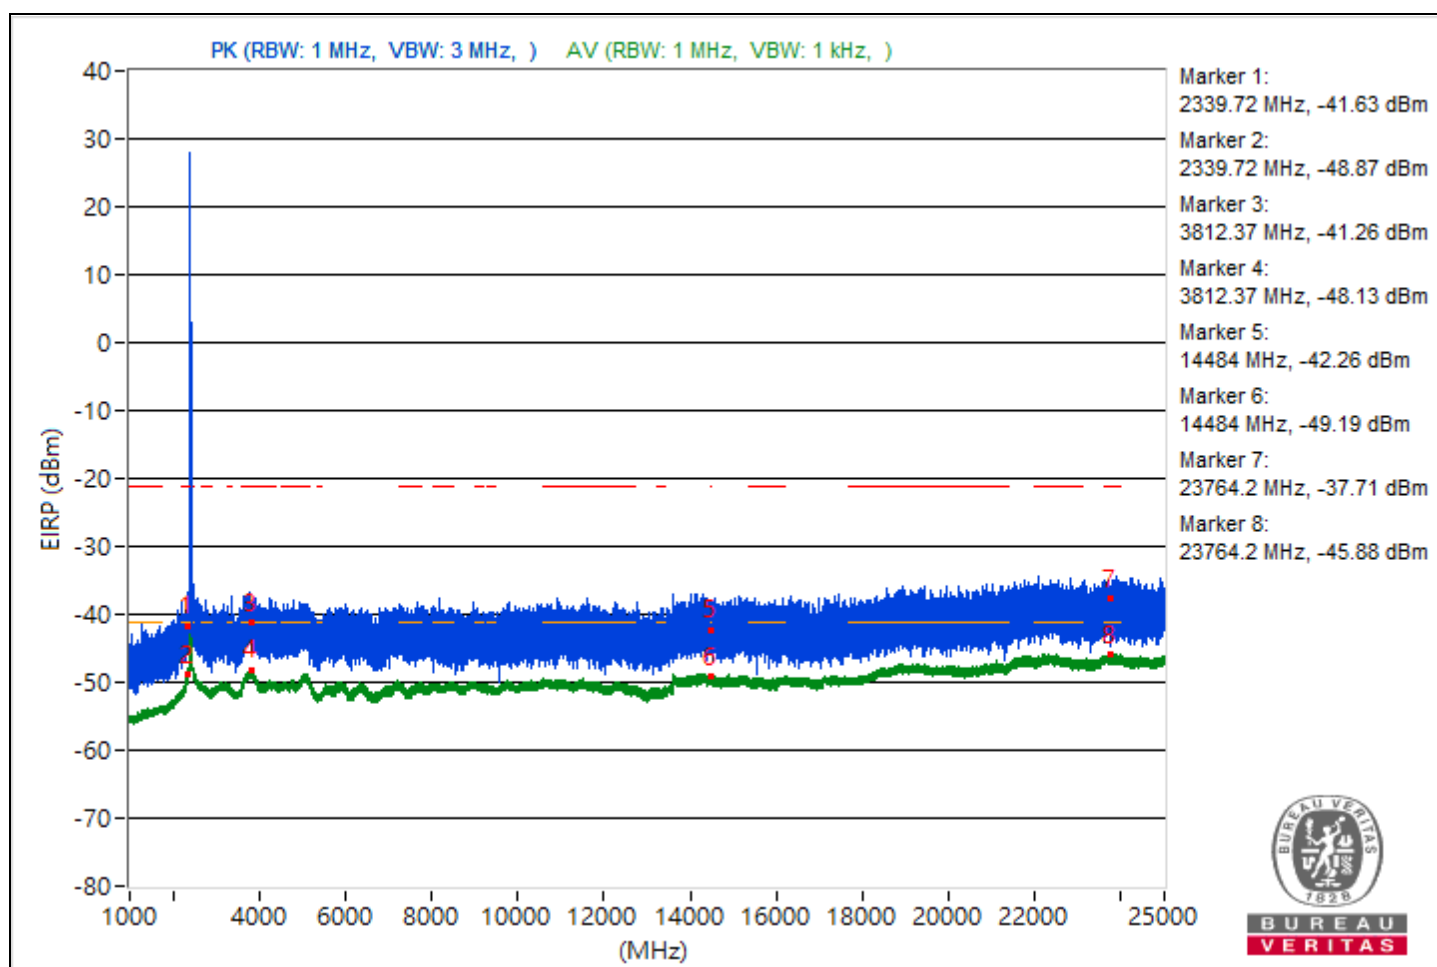

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.47	52.49 PK	74	-21.51	-51.14	8.37	-42.77
2	2337.47	46.06 AV	54	-7.94	-57.57	8.37	-49.2
3	3813.22	53.93 PK	74	-20.07	-49.7	8.37	-41.33
4	3813.22	47.07 AV	54	-6.93	-56.56	8.37	-48.19
5	14485.78	53.45 PK	74	-20.55	-50.18	8.37	-41.81
6	14485.78	46.04 AV	54	-7.96	-57.59	8.37	-49.22
7	22294.3	55.16 PK	74	-18.84	-48.47	8.37	-40.1
8	22294.3	49.43 AV	54	-4.57	-54.2	8.37	-45.83


Note: Margin value = Emission Level - Limit value

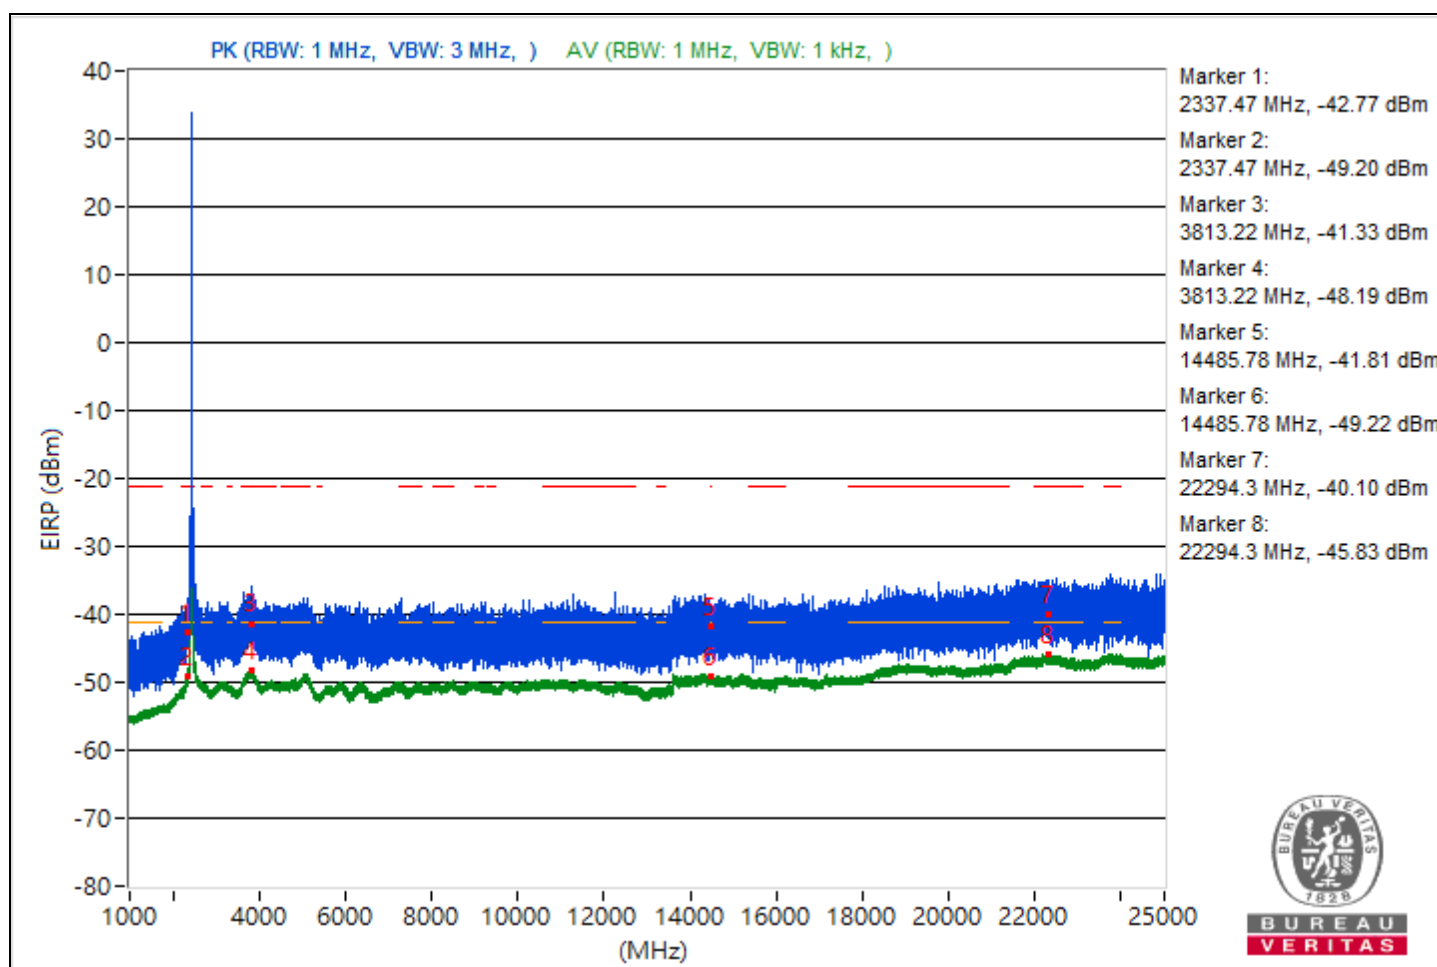

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.14	52.93 PK	74	-21.07	-50.7	8.37	-42.33
2	2336.14	45.77 AV	54	-8.23	-57.86	8.37	-49.49
3	3788.64	53.65 PK	74	-20.35	-49.98	8.37	-41.61
4	3788.64	47.1 AV	54	-6.9	-56.53	8.37	-48.16
5	14472.71	54.84 PK	74	-19.16	-48.79	8.37	-40.42
6	14472.71	46.06 AV	54	-7.94	-57.57	8.37	-49.2
7	22365.2	54.69 PK	74	-19.31	-48.94	8.37	-40.57
8	22365.2	49.36 AV	54	-4.64	-54.27	8.37	-45.9


Note: Margin value = Emission Level - Limit value

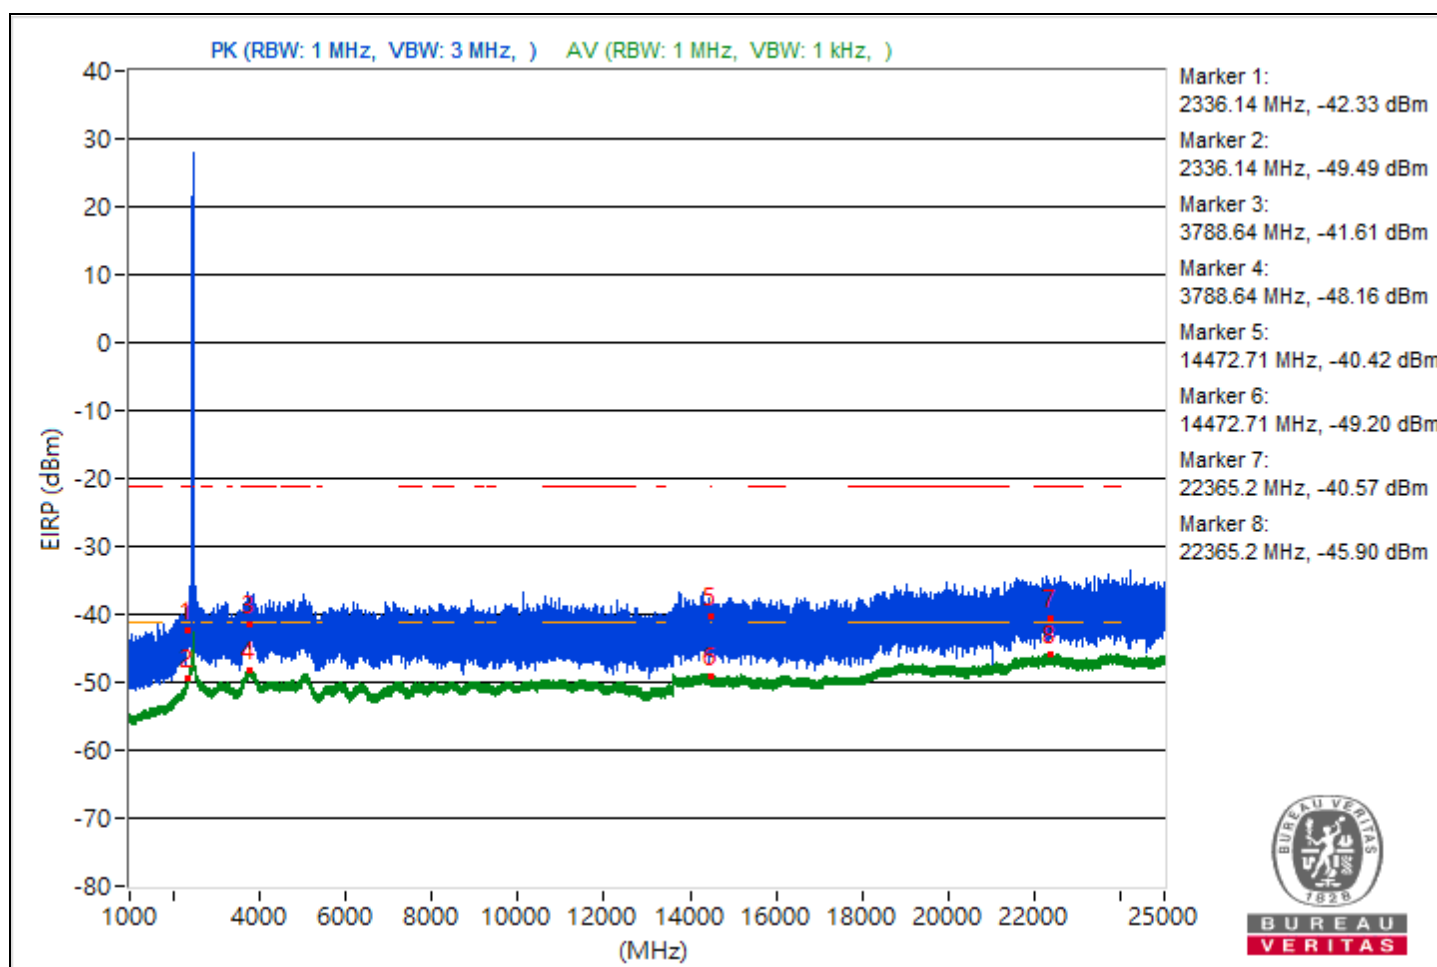

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2335.44	52.01 PK	74	-21.99	-51.62	8.37	-43.25
2	2335.44	45.24 AV	54	-8.76	-58.39	8.37	-50.02
3	3822.17	53.84 PK	74	-20.16	-49.79	8.37	-41.42
4	3822.17	47.17 AV	54	-6.83	-56.46	8.37	-48.09
5	14494.76	53.07 PK	74	-20.93	-50.56	8.37	-42.19
6	14494.76	46.15 AV	54	-7.85	-57.48	8.37	-49.11
7	23622.4	56.42 PK	74	-17.58	-47.21	8.37	-38.84
8	23622.4	49.45 AV	54	-4.55	-54.18	8.37	-45.81


Note: Margin value = Emission Level - Limit value

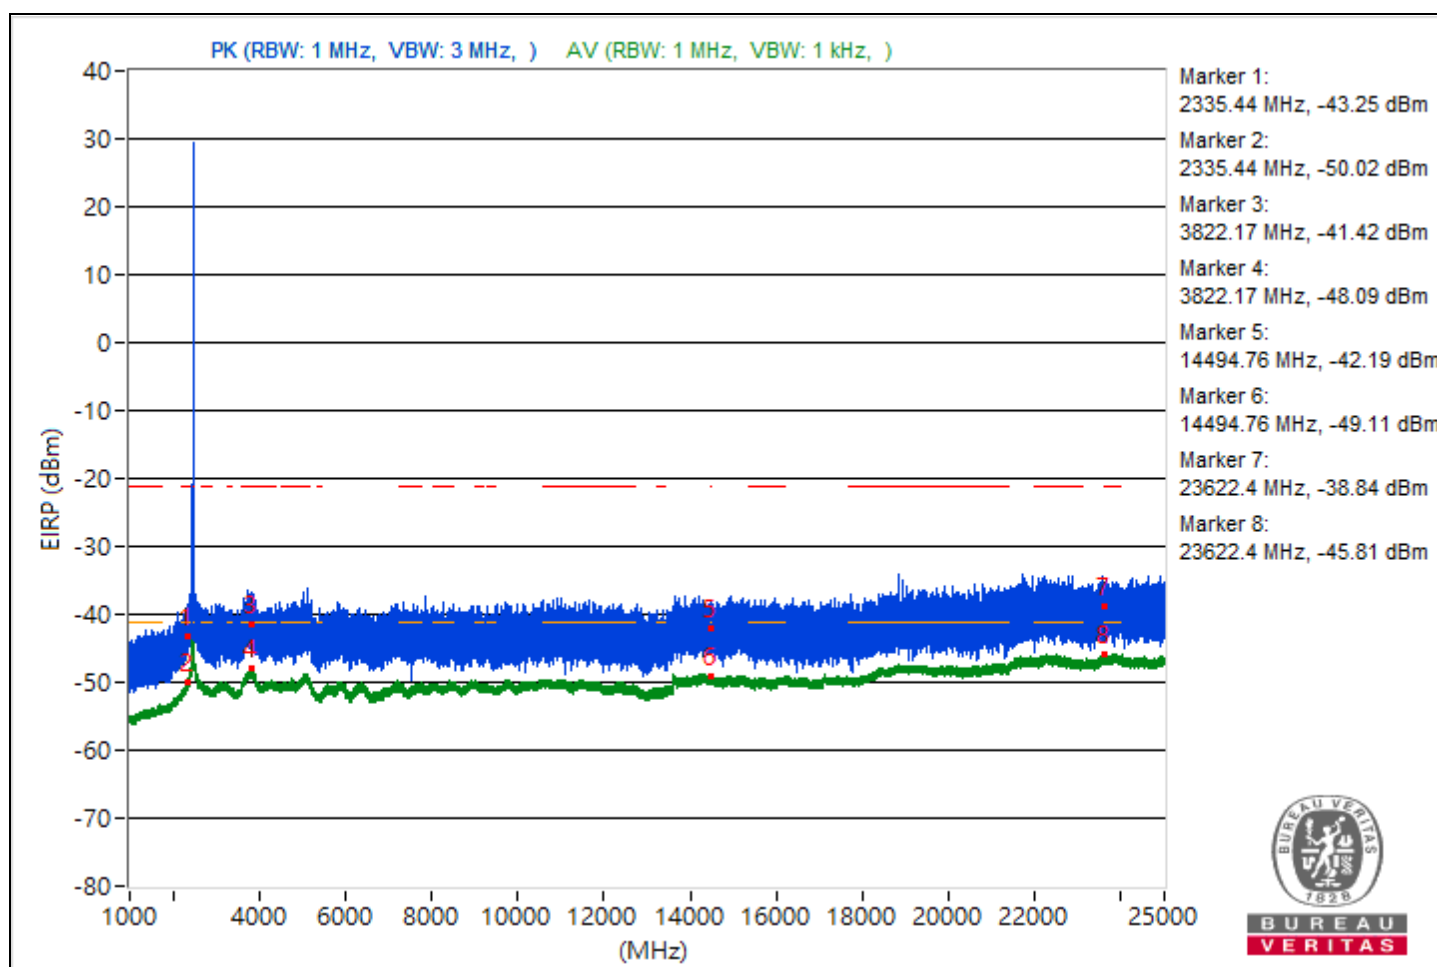

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	23°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2335.13	50.84 PK	74	-23.16	-52.79	8.37	-44.42
2	2335.13	44.55 AV	54	-9.45	-59.08	8.37	-50.71
3	3829.4	59.05 PK	74	-14.95	-44.58	8.37	-36.21
4	3829.4	49.2 AV	54	-4.8	-54.43	8.37	-46.06
5	14494.93	55.32 PK	74	-18.68	-48.31	8.37	-39.94
6	14494.93	46.8 AV	54	-7.2	-56.83	8.37	-48.46
7	23848.4	57.07 PK	74	-16.93	-46.56	8.37	-38.19
8	23848.4	50.6 AV	54	-3.4	-53.03	8.37	-44.66


Note: Margin value = Emission Level - Limit value

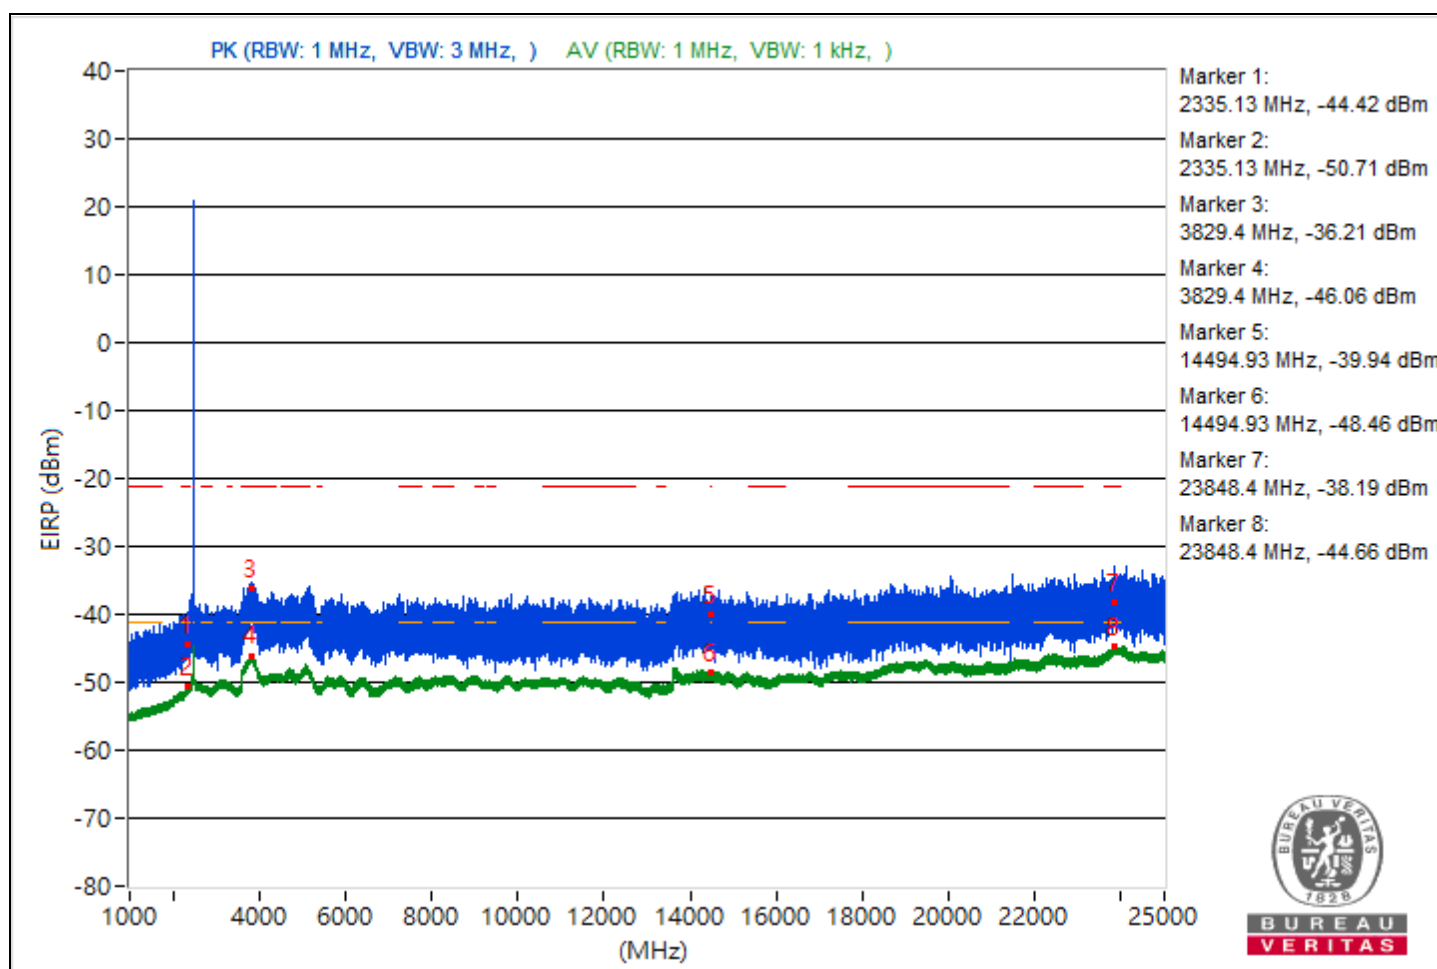

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.96	53.74 PK	74	-20.26	-49.89	8.37	-41.52
2	2339.96	46.35 AV	54	-7.65	-57.28	8.37	-48.91
3	3840.21	51.95 PK	74	-22.05	-51.68	8.37	-43.31
4	3840.21	47.08 AV	54	-6.92	-56.55	8.37	-48.18
5	14476.09	50.72 PK	74	-23.28	-52.91	8.37	-44.54
6	14476.09	46.1 AV	54	-7.9	-57.53	8.37	-49.16
7	22273.5	56.5 PK	74	-17.5	-47.13	8.37	-38.76
8	22273.5	49.78 AV	54	-4.22	-53.85	8.37	-45.48


Note: Margin value = Emission Level - Limit value

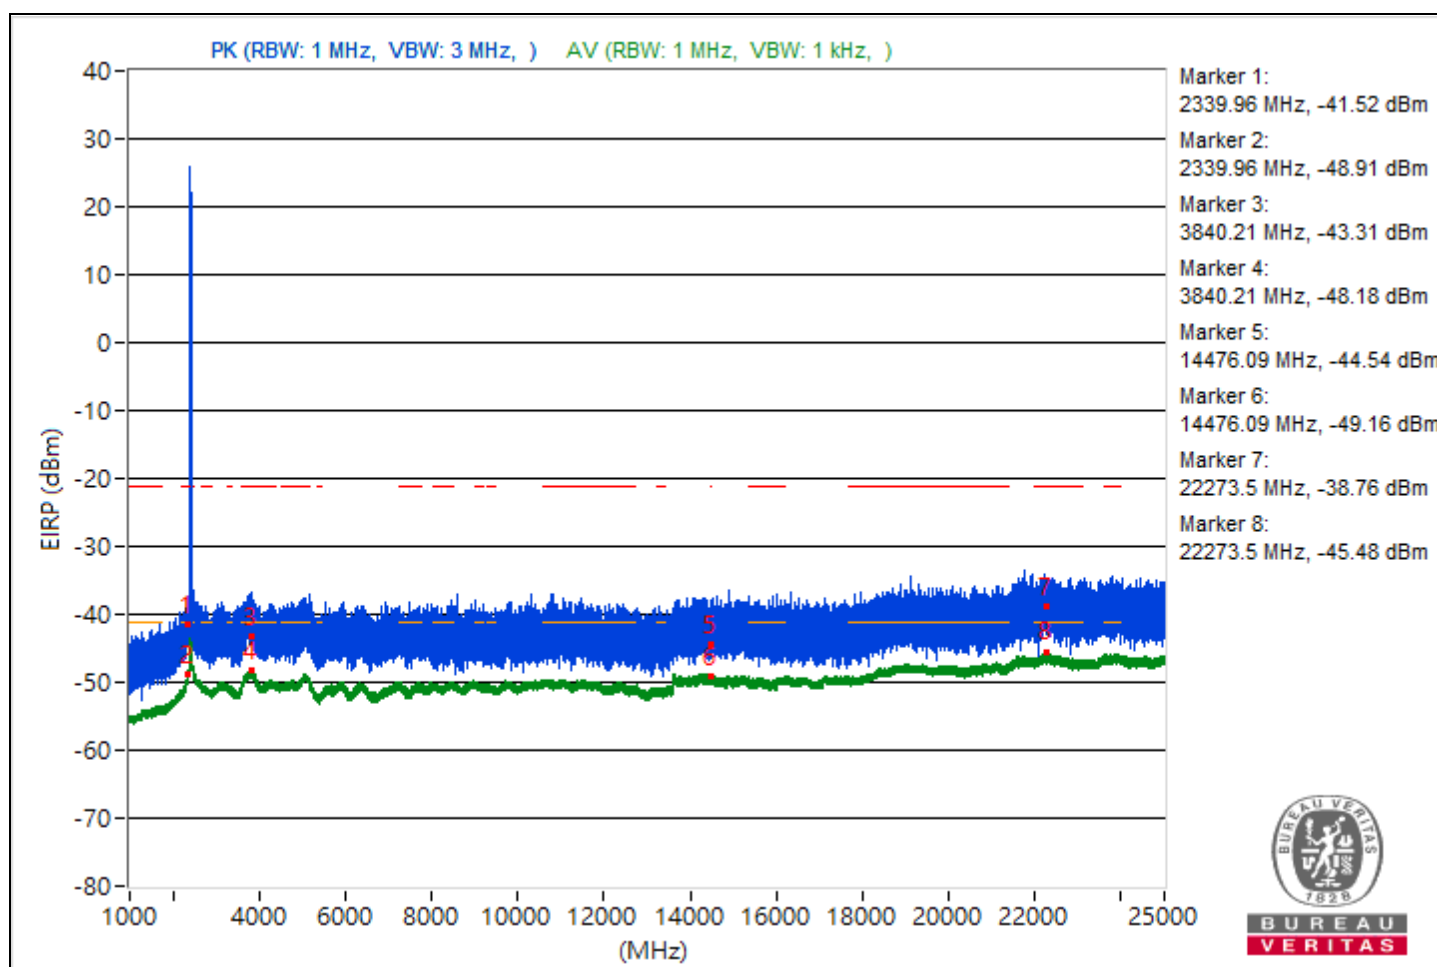

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337	52 PK	74	-22	-51.63	8.37	-43.26
2	2337	46.37 AV	54	-7.63	-57.26	8.37	-48.89
3	3808.48	53.95 PK	74	-20.05	-49.68	8.37	-41.31
4	3808.48	47.11 AV	54	-6.89	-56.52	8.37	-48.15
5	14492.36	54.38 PK	74	-19.62	-49.25	8.37	-40.88
6	14492.36	46.15 AV	54	-7.85	-57.48	8.37	-49.11
7	23785.4	54.11 PK	74	-19.89	-49.52	8.37	-41.15
8	23785.4	49.48 AV	54	-4.52	-54.15	8.37	-45.78


Note: Margin value = Emission Level - Limit value

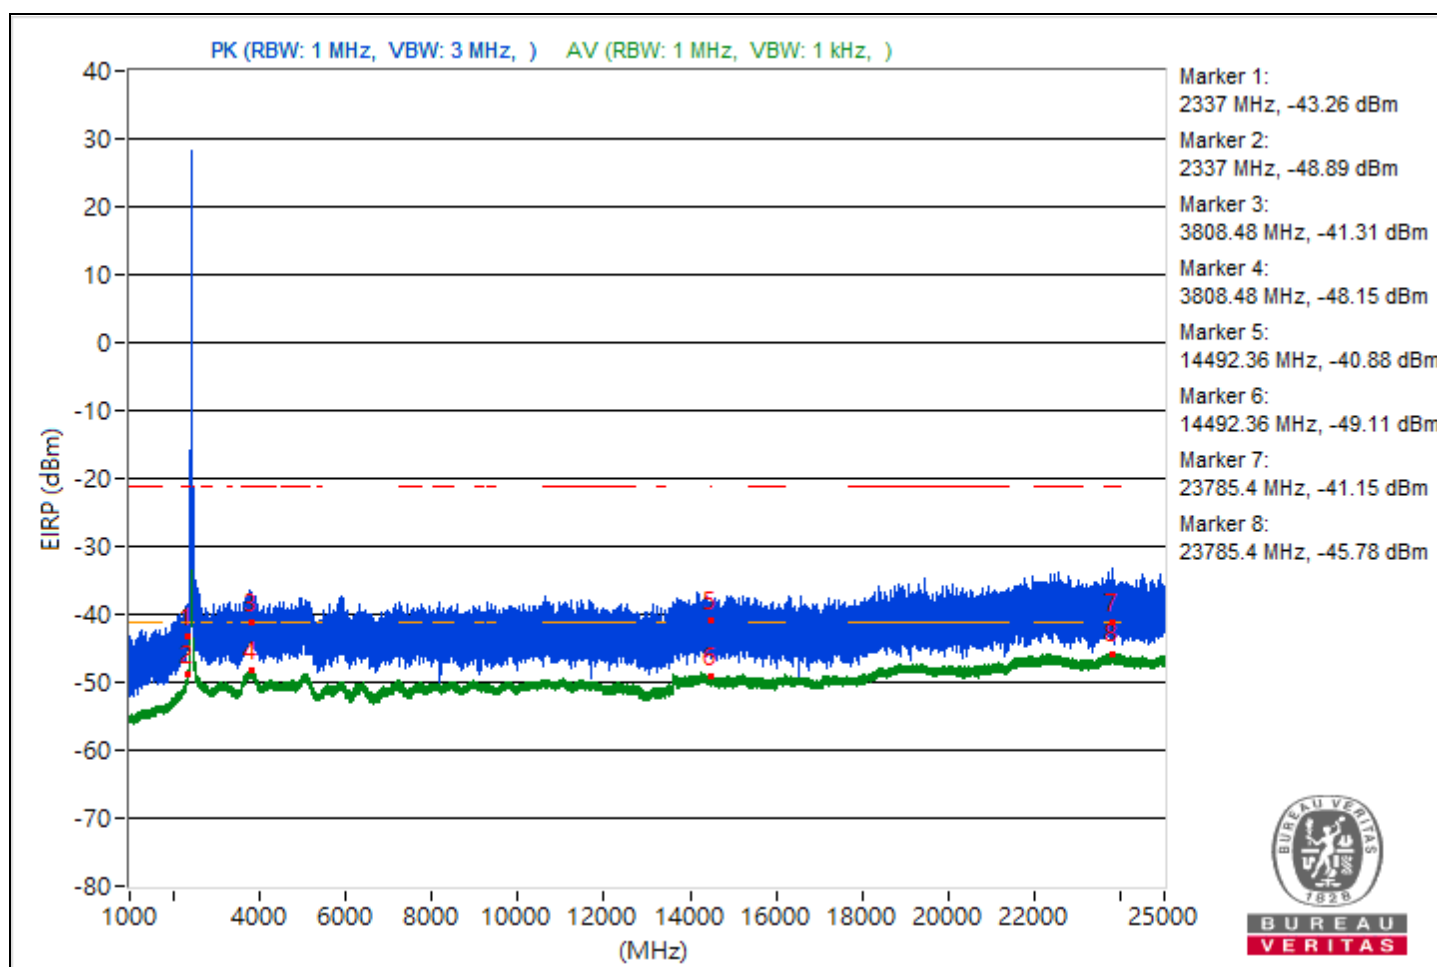

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.72	55.23 PK	74	-18.77	-48.4	8.37	-40.03
2	2339.72	45.51 AV	54	-8.49	-58.12	8.37	-49.75
3	3815.71	55.27 PK	74	-18.73	-48.36	8.37	-39.99
4	3815.71	47.25 AV	54	-6.75	-56.38	8.37	-48.01
5	14496.71	53.76 PK	74	-20.24	-49.87	8.37	-41.5
6	14496.71	46.2 AV	54	-7.8	-57.43	8.37	-49.06
7	23870.2	56.29 PK	74	-17.71	-47.34	8.37	-38.97
8	23870.2	49.4 AV	54	-4.6	-54.23	8.37	-45.86


Note: Margin value = Emission Level - Limit value

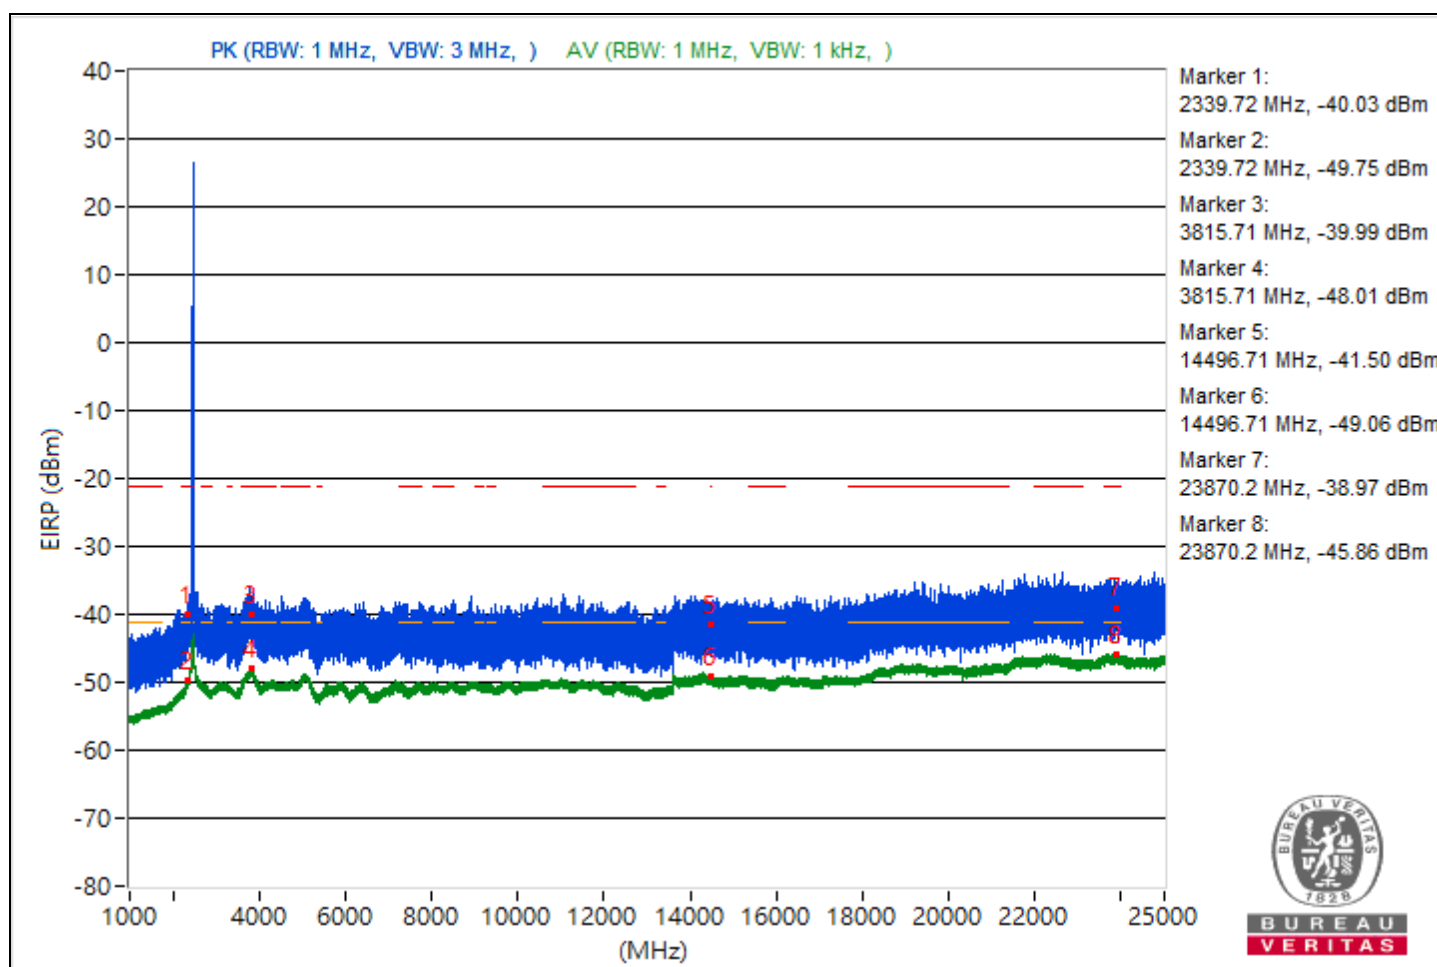

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2332.64	54.97 PK	74	-19.03	-48.66	8.37	-40.29
2	2332.64	45.48 AV	54	-8.52	-58.15	8.37	-49.78
3	3803.97	53.55 PK	74	-20.45	-50.08	8.37	-41.71
4	3803.97	47.06 AV	54	-6.94	-56.57	8.37	-48.2
5	14488.62	56.5 PK	74	-17.5	-47.13	8.37	-38.76
6	14488.62	46.04 AV	54	-7.96	-57.59	8.37	-49.22
7	23823.1	55 PK	74	-19	-48.63	8.37	-40.26
8	23823.1	49.41 AV	54	-4.59	-54.22	8.37	-45.85


Note: Margin value = Emission Level - Limit value

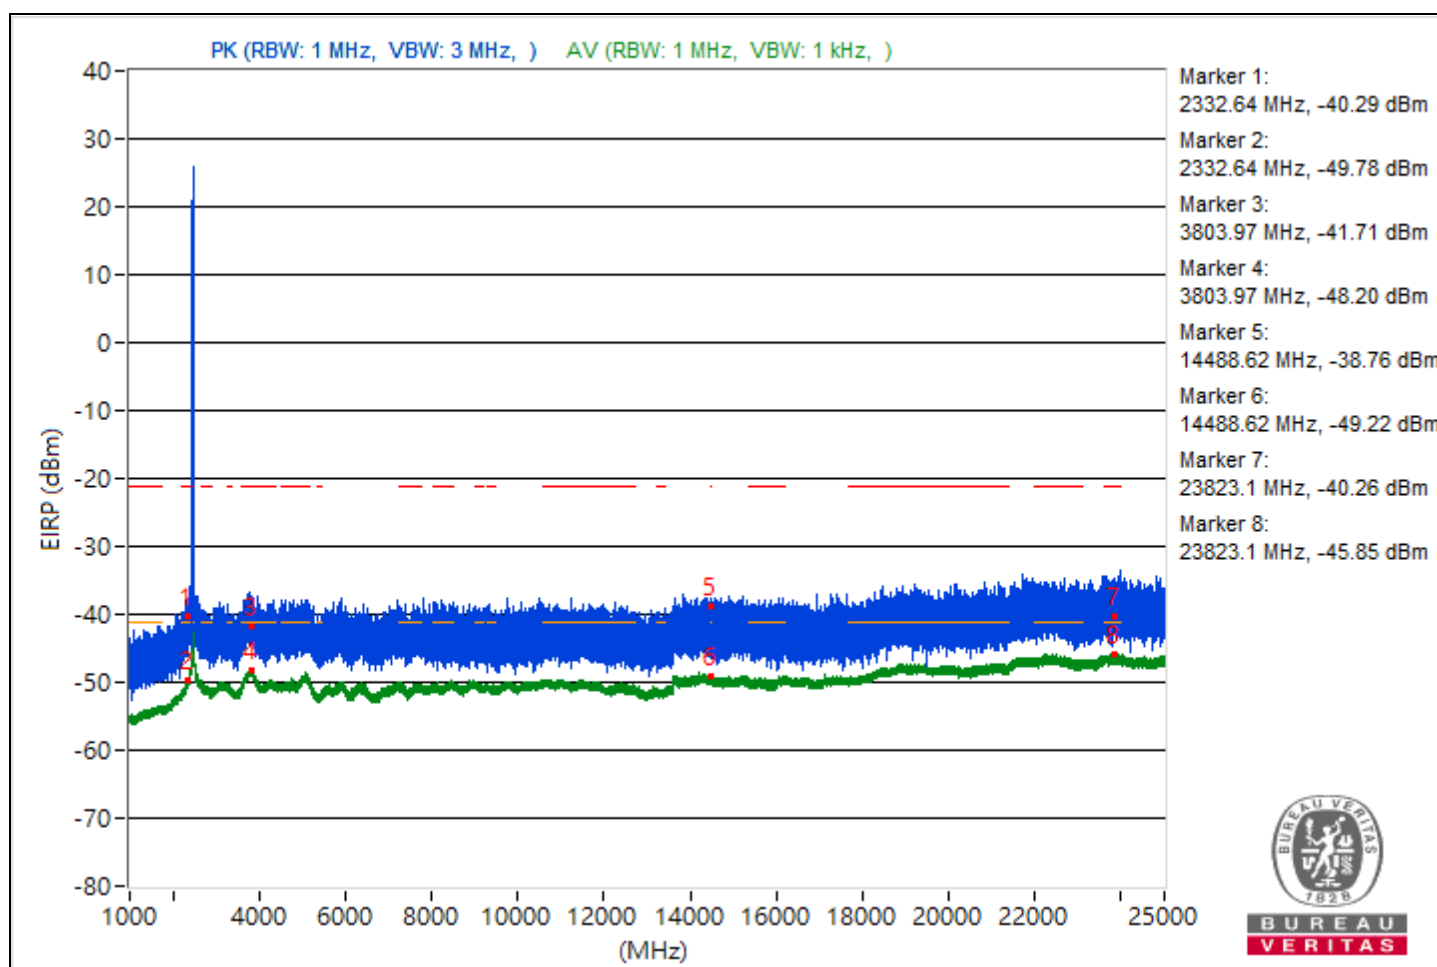

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	23°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2335.29	50 PK	74	-24	-53.63	8.37	-45.26
2	2335.29	44.68 AV	54	-9.32	-58.95	8.37	-50.58
3	3825.74	53.23 PK	74	-20.77	-50.4	8.37	-42.03
4	3825.74	49.22 AV	54	-4.78	-54.41	8.37	-46.04
5	14474.4	53.09 PK	74	-20.91	-50.54	8.37	-42.17
6	14474.4	46.83 AV	54	-7.17	-56.8	8.37	-48.43
7	23886.6	58.05 PK	74	-15.95	-45.58	8.37	-37.21
8	23886.6	50.69 AV	54	-3.31	-52.94	8.37	-44.57


Note: Margin value = Emission Level - Limit value

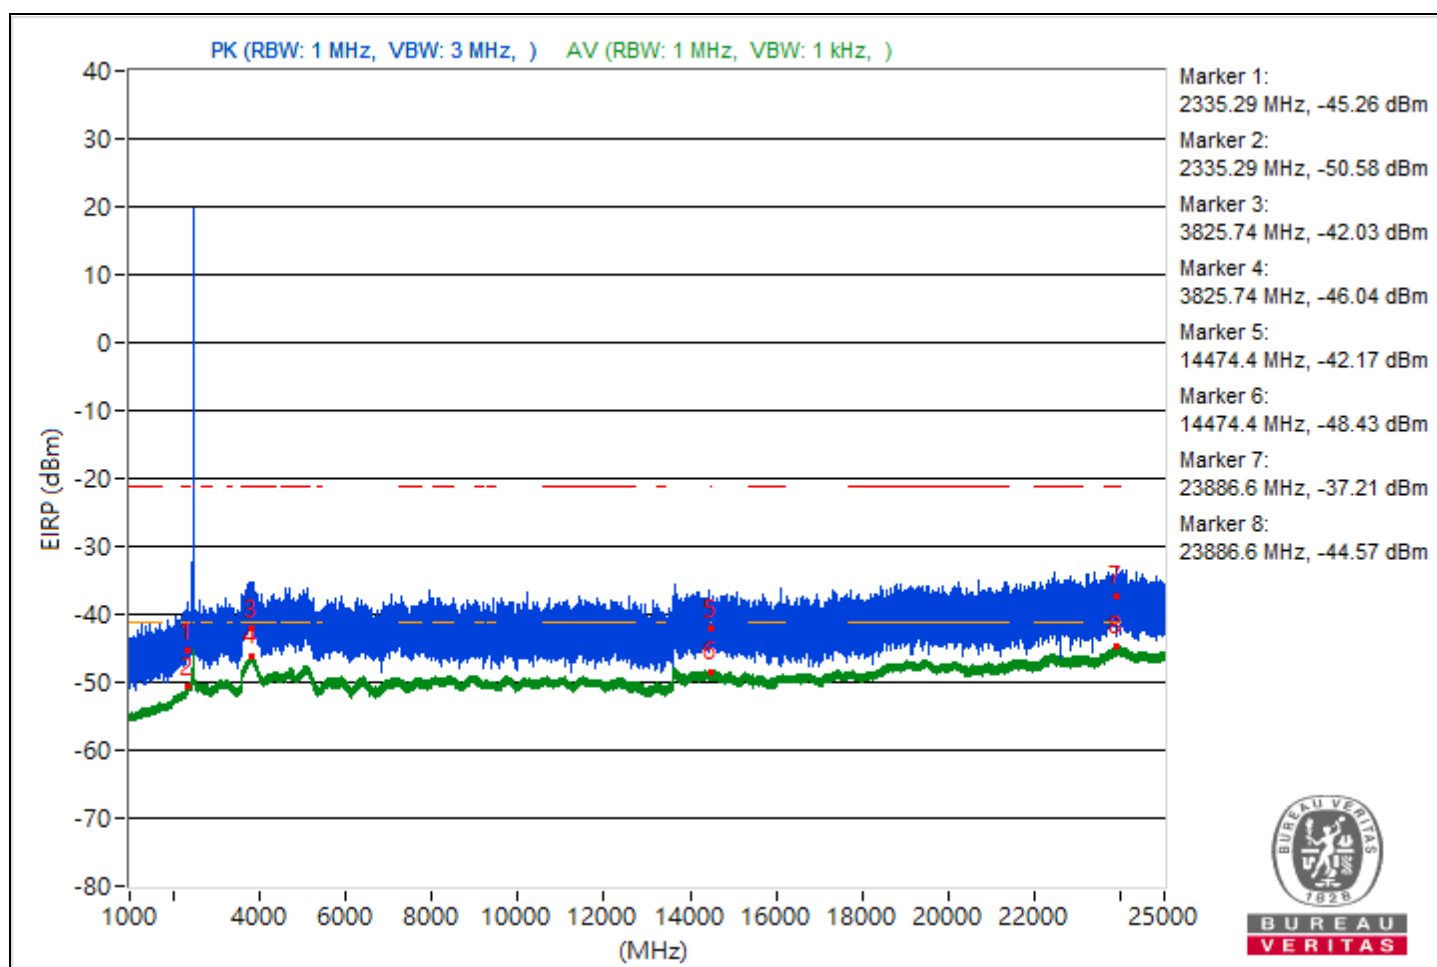

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.3	54.18 PK	74	-19.82	-49.45	8.37	-41.08
2	2336.3	46.17 AV	54	-7.83	-57.46	8.37	-49.09
3	3796.11	55.28 PK	74	-18.72	-48.35	8.37	-39.98
4	3796.11	47.08 AV	54	-6.92	-56.55	8.37	-48.18
5	14470.22	53.77 PK	74	-20.23	-49.86	8.37	-41.49
6	14470.22	46.01 AV	54	-7.99	-57.62	8.37	-49.25
7	22256	57.41 PK	74	-16.59	-46.22	8.37	-37.85
8	22256	49.39 AV	54	-4.61	-54.24	8.37	-45.87


Note: Margin value = Emission Level - Limit value

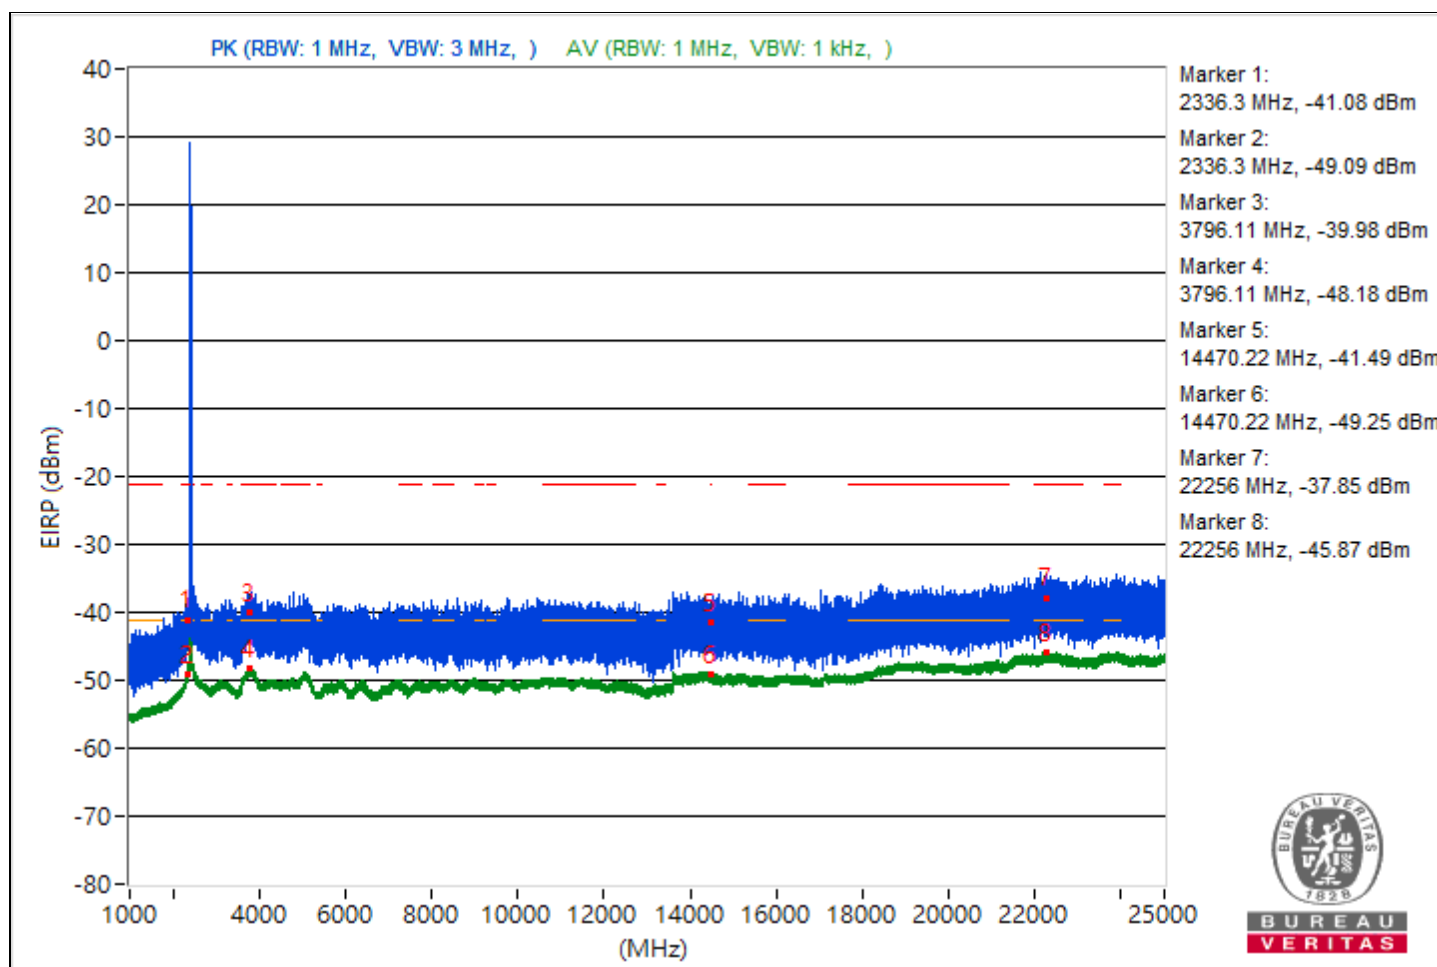

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2335.21	56.43 PK	74	-17.57	-47.2	8.37	-38.83
2	2335.21	46.26 AV	54	-7.74	-57.37	8.37	-49
3	3814.62	56.7 PK	74	-17.3	-46.93	8.37	-38.56
4	3814.62	47.18 AV	54	-6.82	-56.45	8.37	-48.08
5	14479.73	53.76 PK	74	-20.24	-49.87	8.37	-41.5
6	14479.73	46.19 AV	54	-7.81	-57.44	8.37	-49.07
7	22536.1	55.84 PK	74	-18.16	-47.79	8.37	-39.42
8	22536.1	49.4 AV	54	-4.6	-54.23	8.37	-45.86


Note: Margin value = Emission Level - Limit value

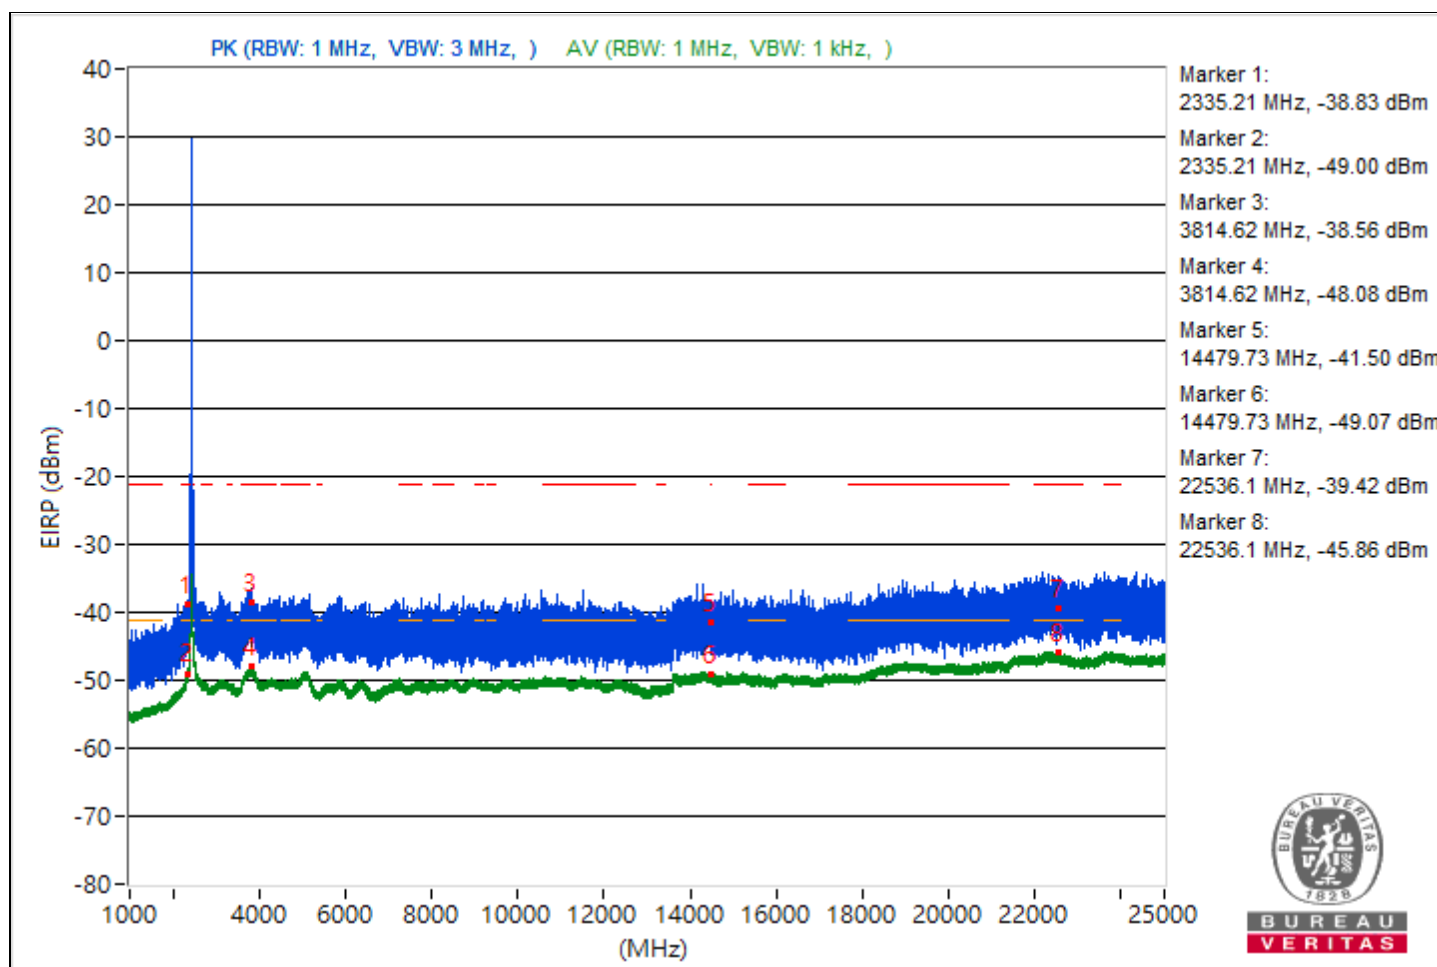

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.57	53.43 PK	74	-20.57	-50.2	8.37	-41.83
2	2339.57	45.62 AV	54	-8.38	-58.01	8.37	-49.64
3	3815.09	56.02 PK	74	-17.98	-47.61	8.37	-39.24
4	3815.09	47.16 AV	54	-6.84	-56.47	8.37	-48.1
5	14490.49	52.18 PK	74	-21.82	-51.45	8.37	-43.08
6	14490.49	46.09 AV	54	-7.91	-57.54	8.37	-49.17
7	22237.3	53.13 PK	74	-20.87	-50.5	8.37	-42.13
8	22237.3	49.46 AV	54	-4.54	-54.17	8.37	-45.8


Note: Margin value = Emission Level - Limit value

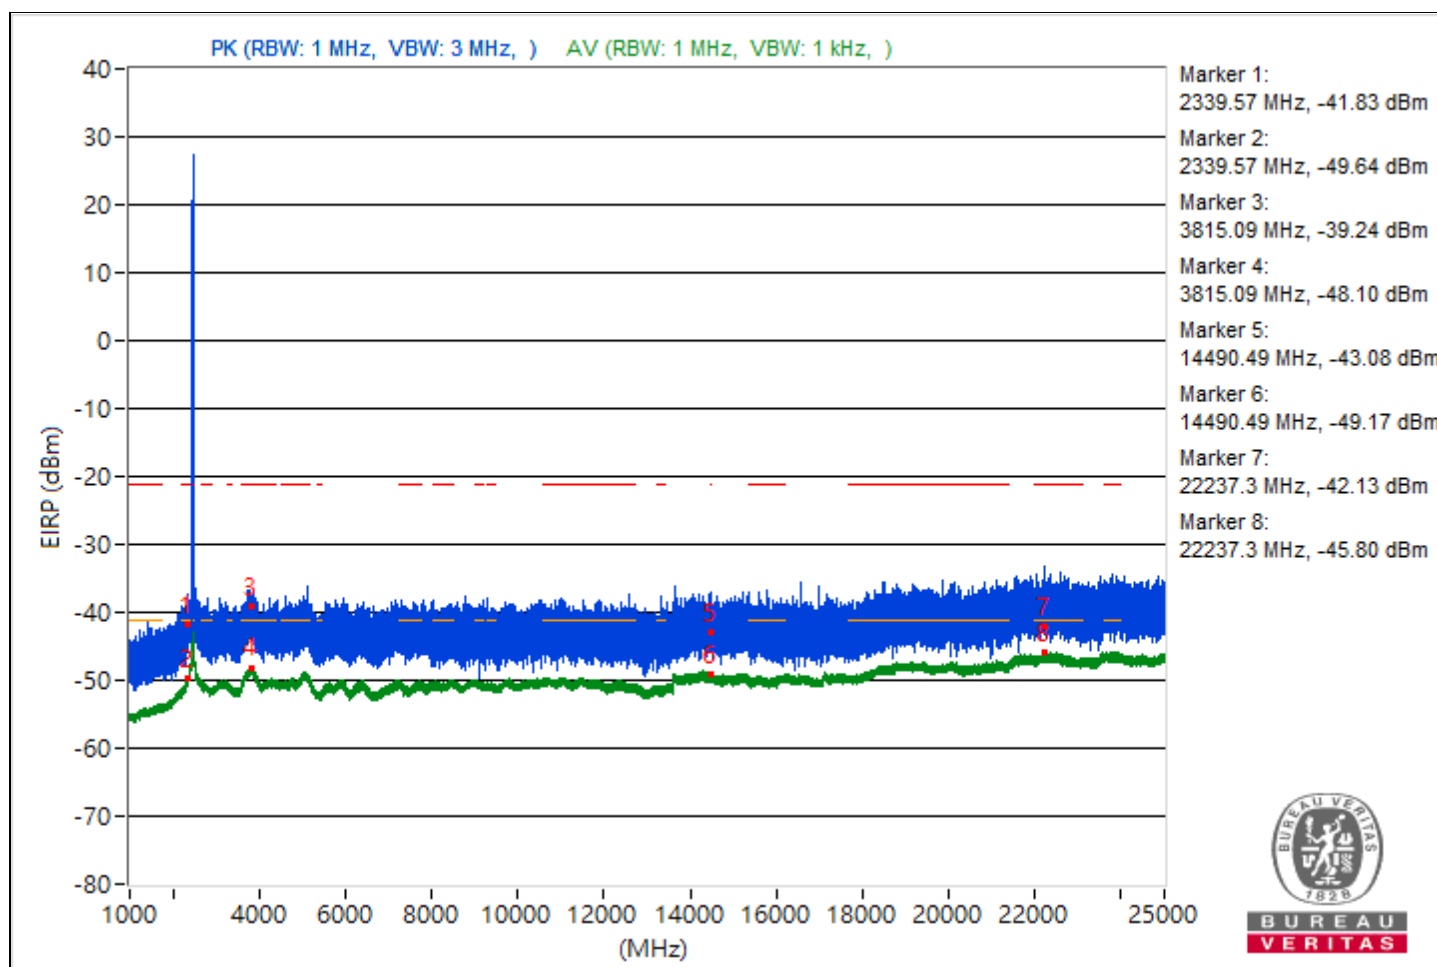

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.96	52.18 PK	74	-21.82	-51.45	8.37	-43.08
2	2339.96	45.3 AV	54	-8.7	-58.33	8.37	-49.96
3	3762.36	56.02 PK	74	-17.98	-47.61	8.37	-39.24
4	3762.36	47.08 AV	54	-6.92	-56.55	8.37	-48.18
5	14492.53	52.43 PK	74	-21.57	-51.2	8.37	-42.83
6	14492.53	46.13 AV	54	-7.87	-57.5	8.37	-49.13
7	23946.7	55.63 PK	74	-18.37	-48	8.37	-39.63
8	23946.7	49.38 AV	54	-4.62	-54.25	8.37	-45.88


Note: Margin value = Emission Level - Limit value

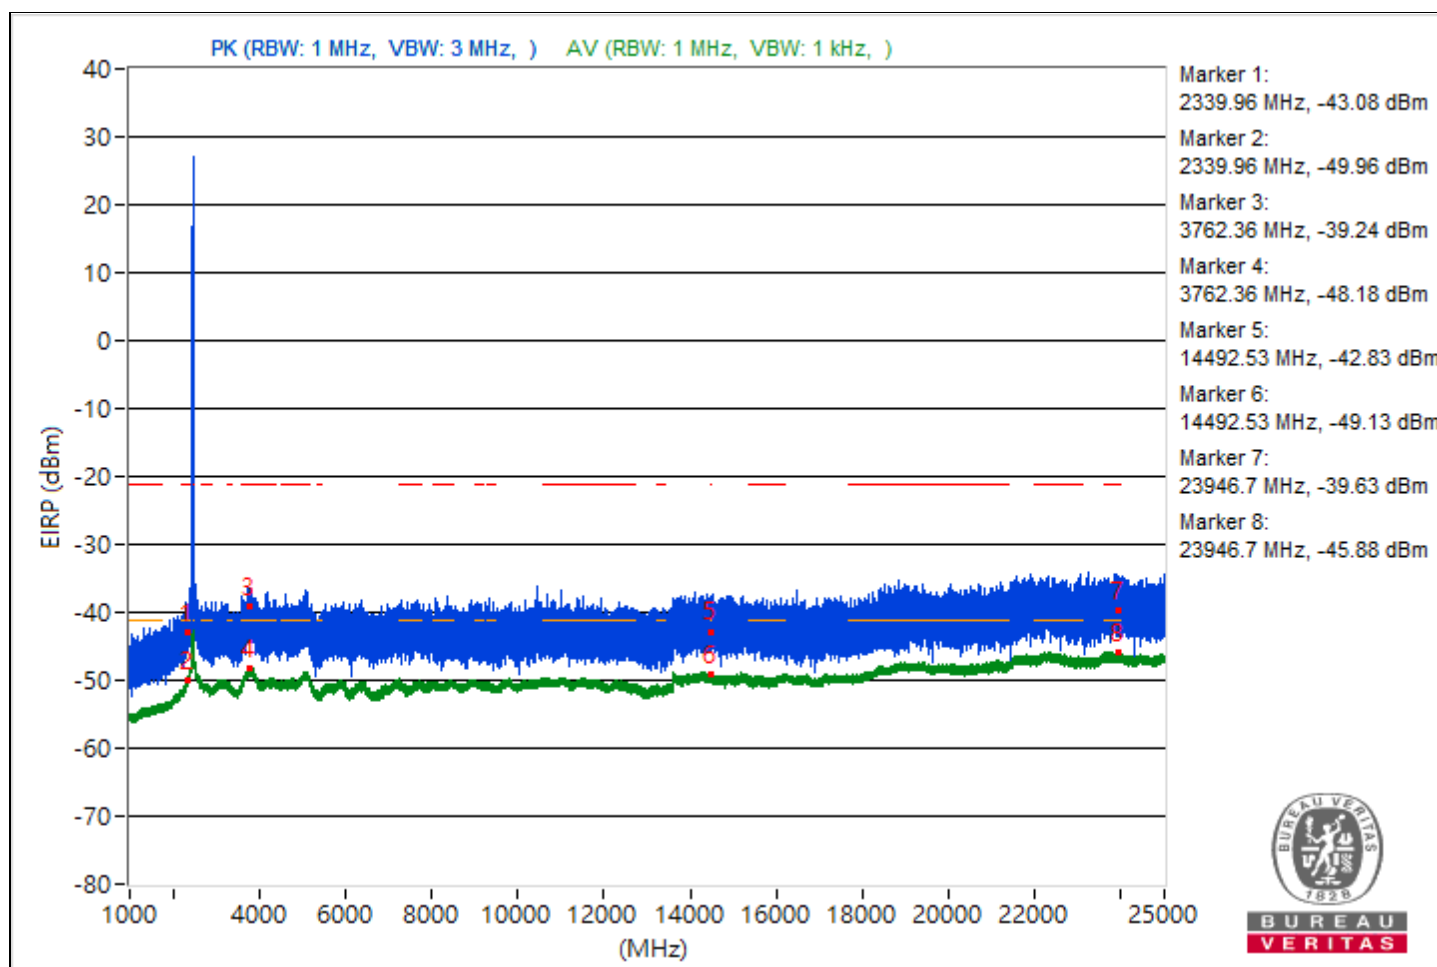

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2328.68	53.19 PK	74	-20.81	-50.44	8.37	-42.07
2	2328.68	45.24 AV	54	-8.76	-58.39	8.37	-50.02
3	3795.64	55.19 PK	74	-18.81	-48.44	8.37	-40.07
4	3795.64	47.19 AV	54	-6.81	-56.44	8.37	-48.07
5	14480	54.64 PK	74	-19.36	-48.99	8.37	-40.62
6	14480	46.15 AV	54	-7.85	-57.48	8.37	-49.11
7	23882	52.72 PK	74	-21.28	-50.91	8.37	-42.54
8	23882	49.39 AV	54	-4.61	-54.24	8.37	-45.87


Note: Margin value = Emission Level - Limit value

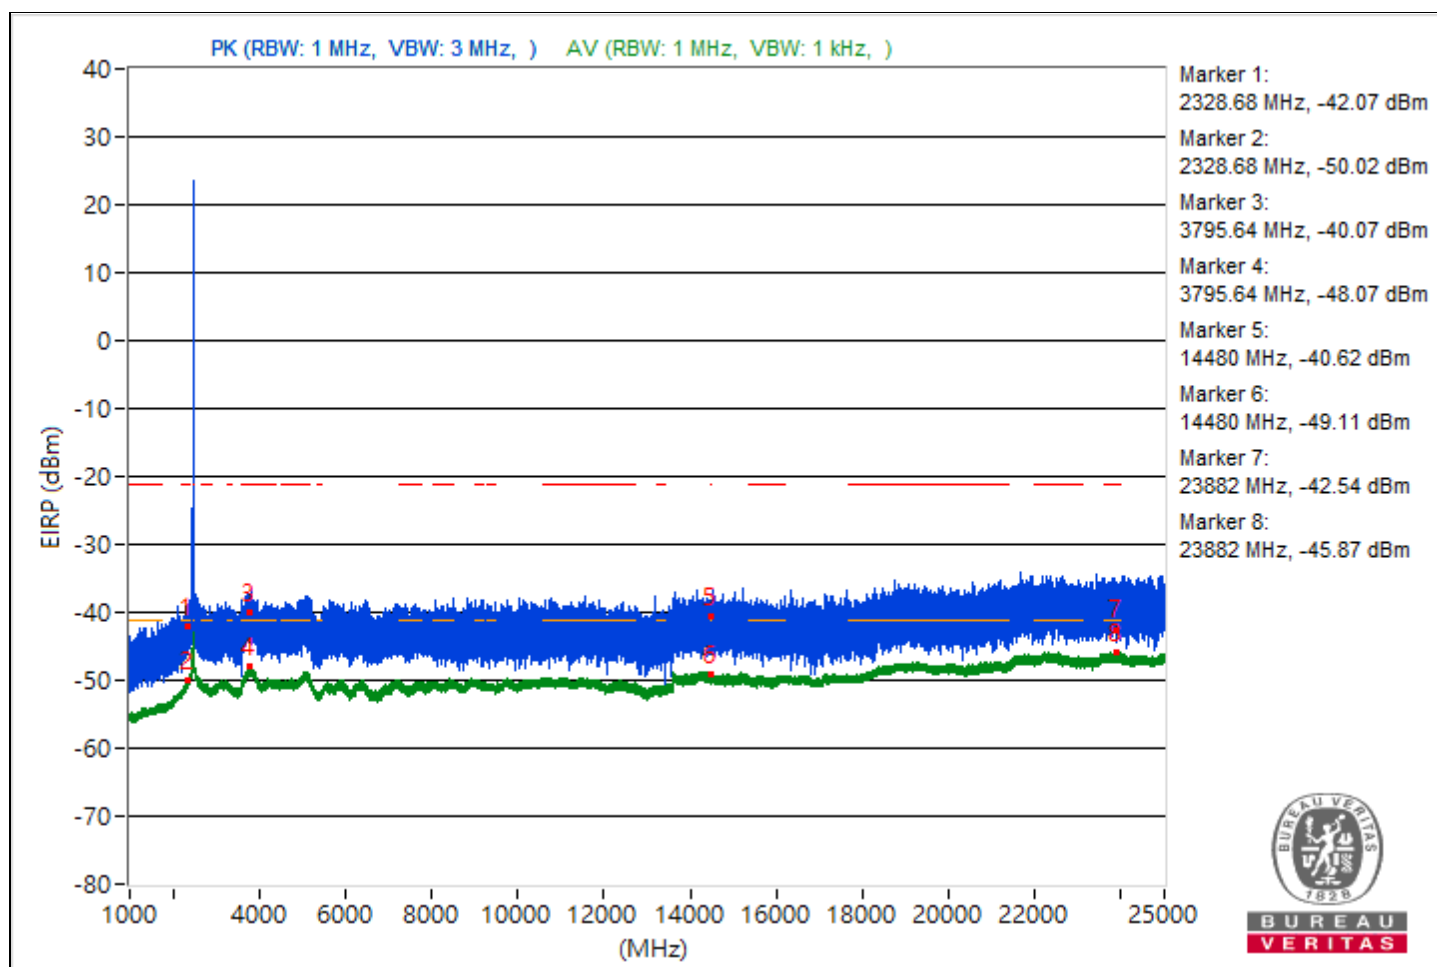

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.8	55 PK	74	-19	-48.63	8.37	-40.26
2	2339.8	46.09 AV	54	-7.91	-57.54	8.37	-49.17
3	3782.19	54.17 PK	74	-19.83	-49.46	8.37	-41.09
4	3782.19	47.2 AV	54	-6.8	-56.43	8.37	-48.06
5	14483.56	53.45 PK	74	-20.55	-50.18	8.37	-41.81
6	14483.56	46.3 AV	54	-7.7	-57.33	8.37	-48.96
7	23780.1	55.49 PK	74	-18.51	-48.14	8.37	-39.77
8	23780.1	49.41 AV	54	-4.59	-54.22	8.37	-45.85


Note: Margin value = Emission Level - Limit value

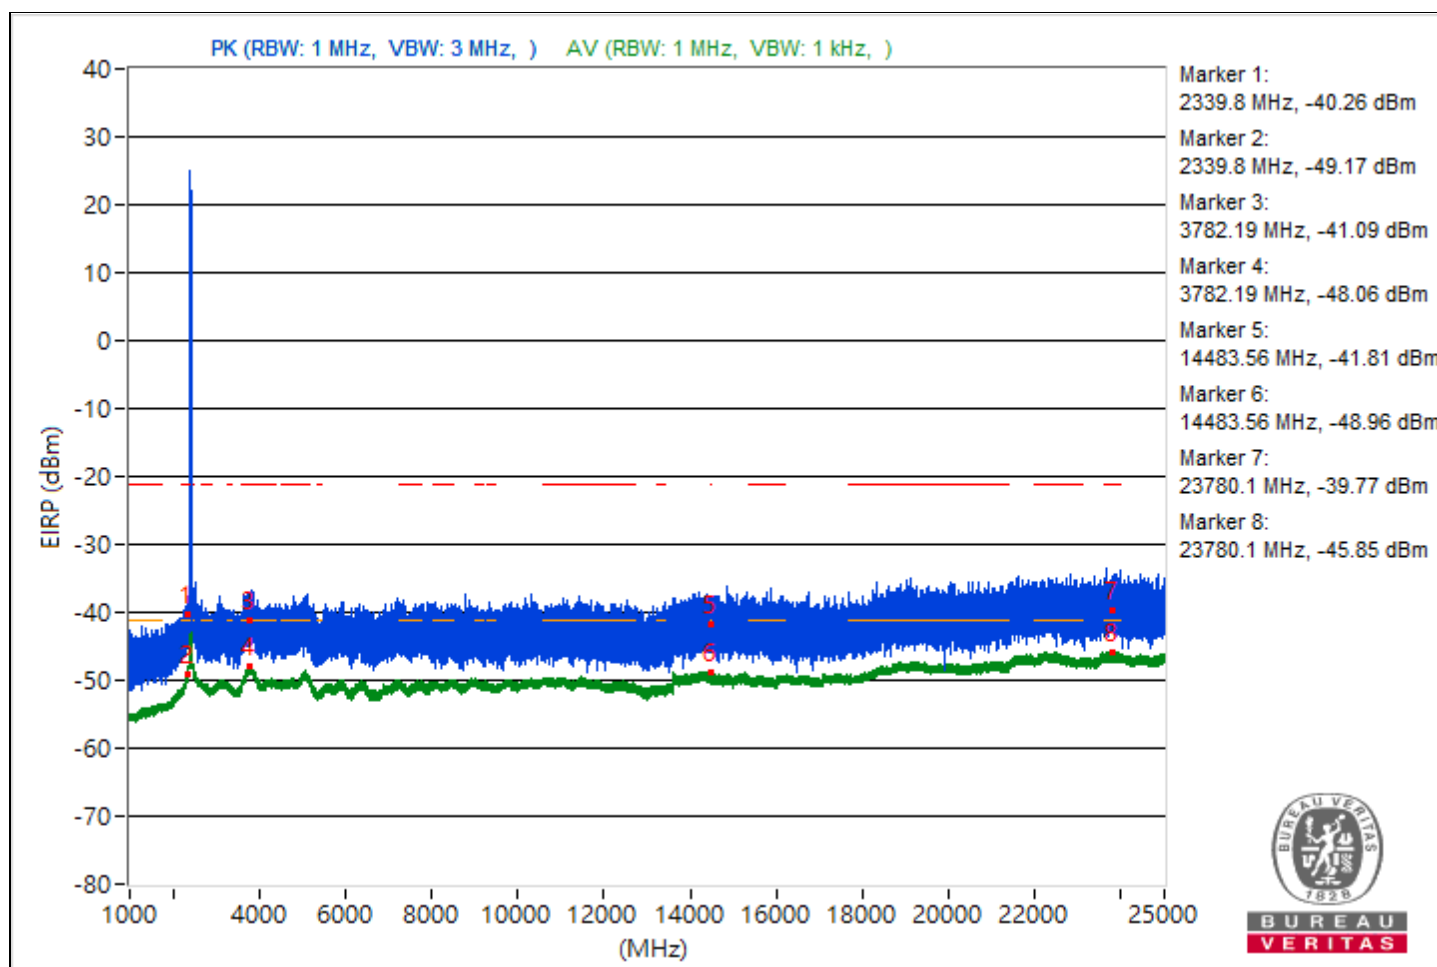

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.3	54.24 PK	74	-19.76	-49.39	8.37	-41.02
2	2336.3	46.18 AV	54	-7.82	-57.45	8.37	-49.08
3	3832.82	51.23 PK	74	-22.77	-52.4	8.37	-44.03
4	3832.82	47.17 AV	54	-6.83	-56.46	8.37	-48.09
5	14481.42	53.14 PK	74	-20.86	-50.49	8.37	-42.12
6	14481.42	45.92 AV	54	-8.08	-57.71	8.37	-49.34
7	23968.9	56.82 PK	74	-17.18	-46.81	8.37	-38.44
8	23968.9	49.42 AV	54	-4.58	-54.21	8.37	-45.84


Note: Margin value = Emission Level - Limit value

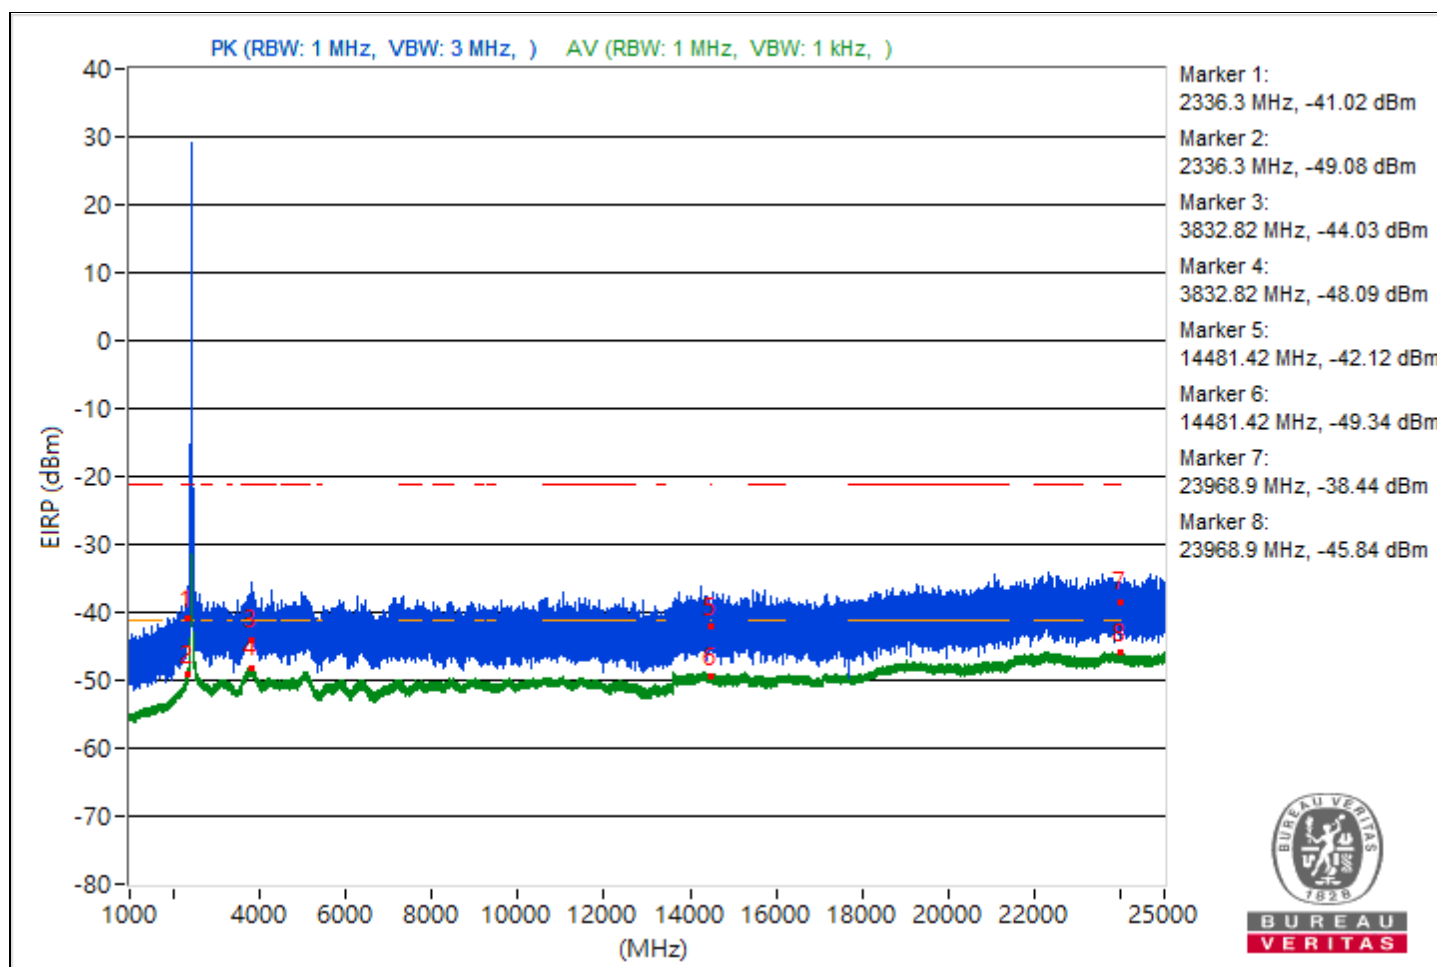

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2324.79	52.03 PK	74	-21.97	-51.6	8.37	-43.23
2	2324.79	45.48 AV	54	-8.52	-58.15	8.37	-49.78
3	3814.16	52.09 PK	74	-21.91	-51.54	8.37	-43.17
4	3814.16	47.22 AV	54	-6.78	-56.41	8.37	-48.04
5	14476.62	53.99 PK	74	-20.01	-49.64	8.37	-41.27
6	14476.62	46.04 AV	54	-7.96	-57.59	8.37	-49.22
7	22300.3	53.77 PK	74	-20.23	-49.86	8.37	-41.49
8	22300.3	49.37 AV	54	-4.63	-54.26	8.37	-45.89


Note: Margin value = Emission Level - Limit value

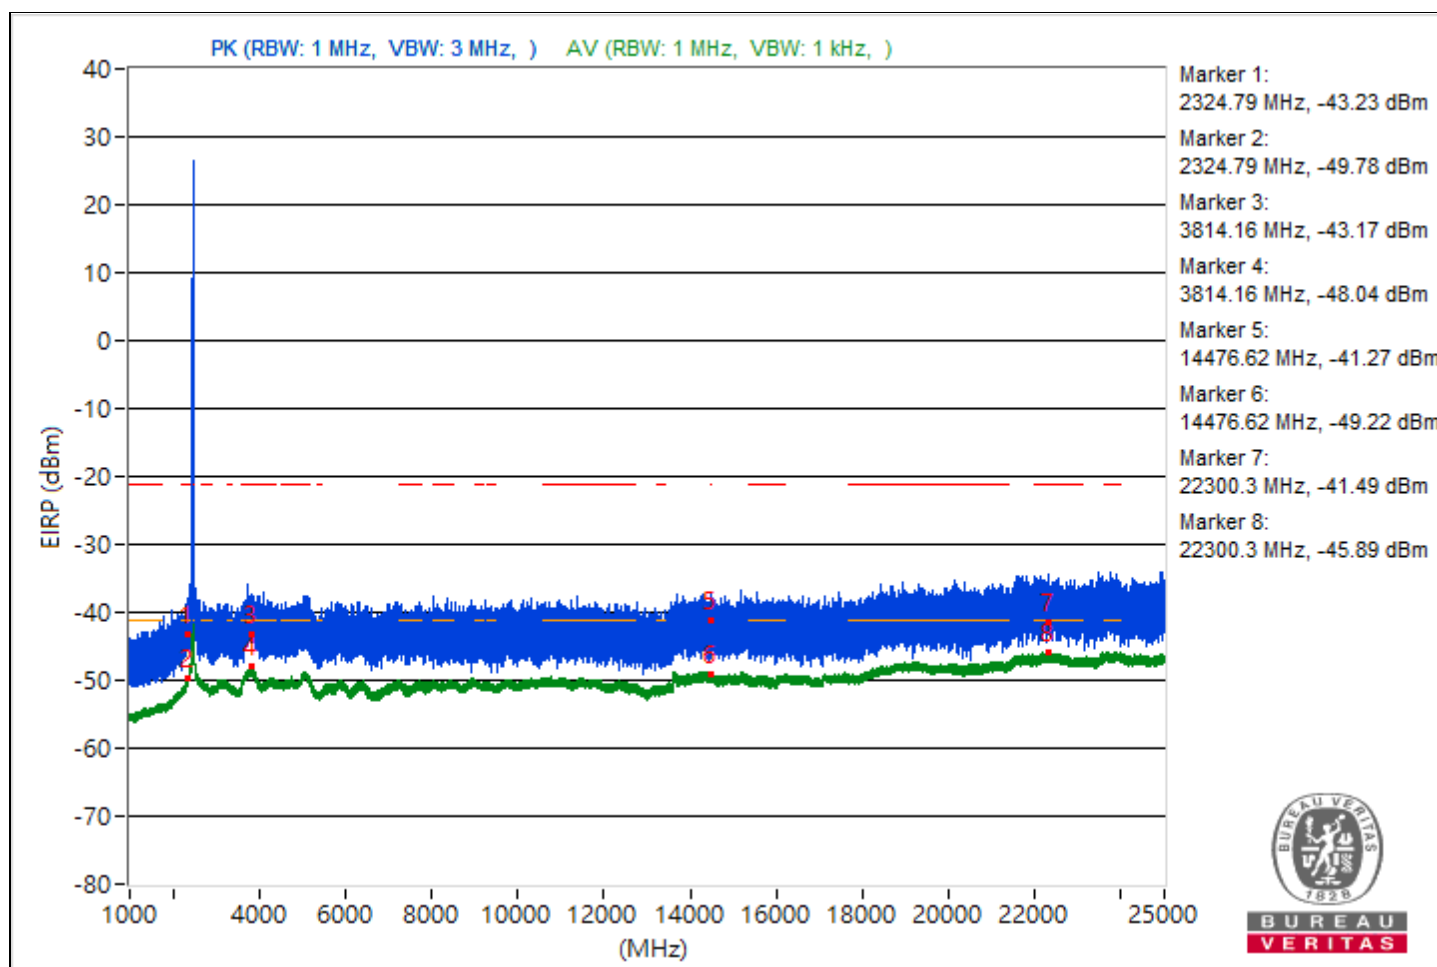

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2330.78	52.51 PK	74	-21.49	-51.12	8.37	-42.75
2	2330.78	45.49 AV	54	-8.51	-58.14	8.37	-49.77
3	3831.73	54.6 PK	74	-19.4	-49.03	8.37	-40.66
4	3831.73	47.19 AV	54	-6.81	-56.44	8.37	-48.07
5	14492.71	52.92 PK	74	-21.08	-50.71	8.37	-42.34
6	14492.71	46.09 AV	54	-7.91	-57.54	8.37	-49.17
7	23757.6	56.18 PK	74	-17.82	-47.45	8.37	-39.08
8	23757.6	49.58 AV	54	-4.42	-54.05	8.37	-45.68


Note: Margin value = Emission Level - Limit value

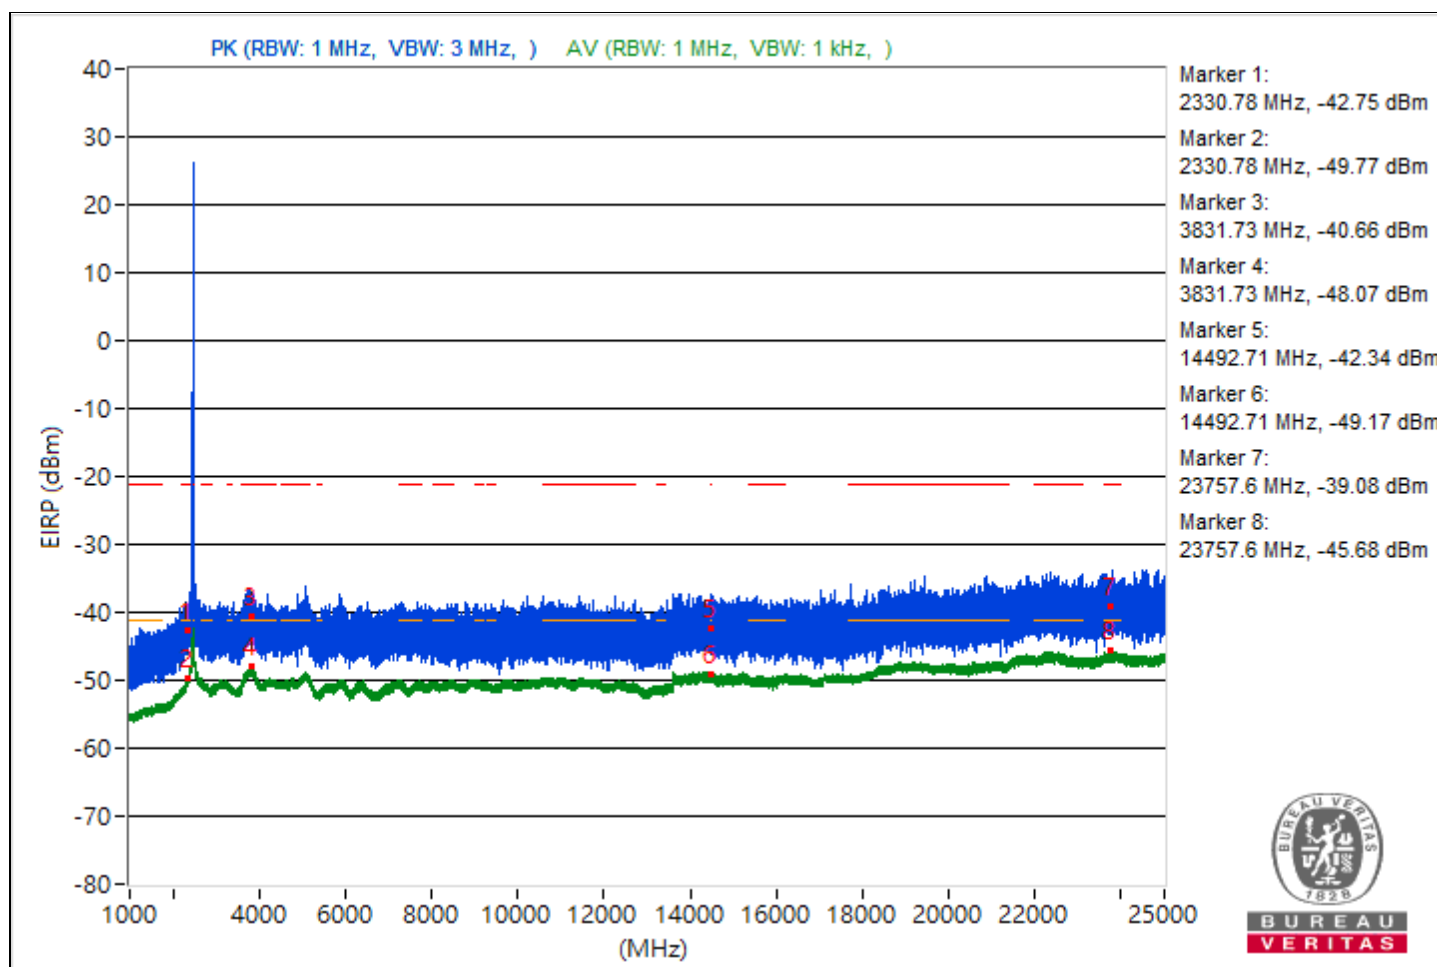

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337	50.53 PK	74	-23.47	-53.1	8.37	-44.73
2	2337	45.03 AV	54	-8.97	-58.6	8.37	-50.23
3	3820.14	52.06 PK	74	-21.94	-51.57	8.37	-43.2
4	3820.14	47.17 AV	54	-6.83	-56.46	8.37	-48.09
5	14478.76	52.21 PK	74	-21.79	-51.42	8.37	-43.05
6	14478.76	46.23 AV	54	-7.77	-57.4	8.37	-49.03
7	22232.7	58.01 PK	74	-15.99	-45.62	8.37	-37.25
8	22232.7	49.35 AV	54	-4.65	-54.28	8.37	-45.91

Note: Margin value = Emission Level - Limit value

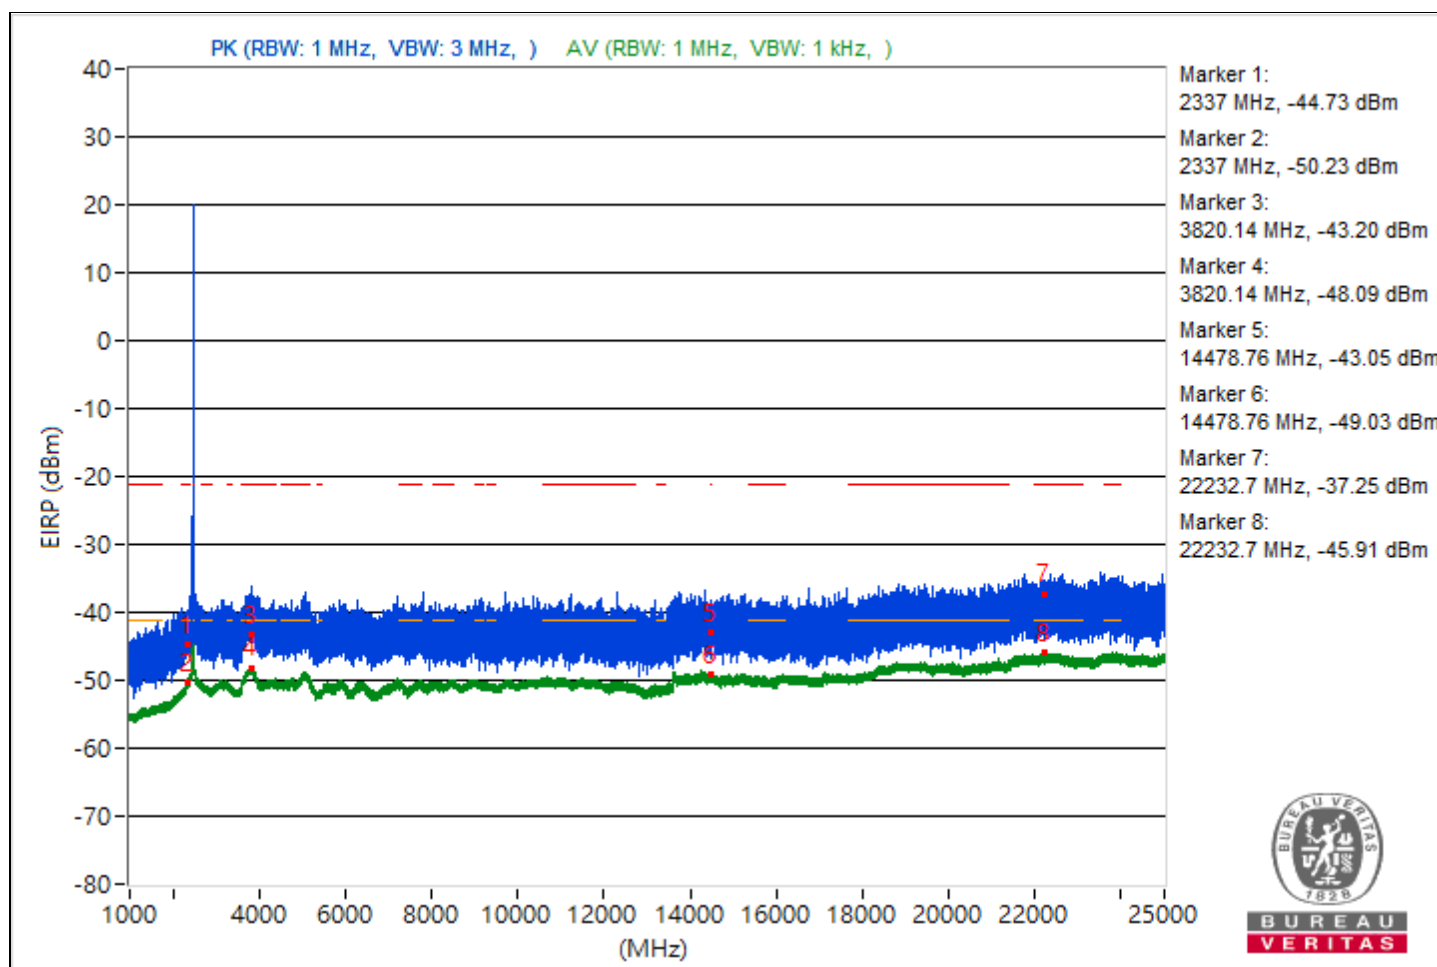

Conducted Band Edges


1TX

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2411.25	119.42 PK			17.97	6.19	24.16
2	*2411.25	115.8 AV			14.35	6.19	20.54
3	2387.21	59.37 PK	74	-14.63	-42.08	6.19	-35.89
4	2387.21	49.75 AV	54	-4.25	-51.7	6.19	-45.51
5	2485.23	55.5 PK	74	-18.5	-45.95	6.19	-39.76
6	2485.23	44.67 AV	54	-9.33	-56.78	6.19	-50.59

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

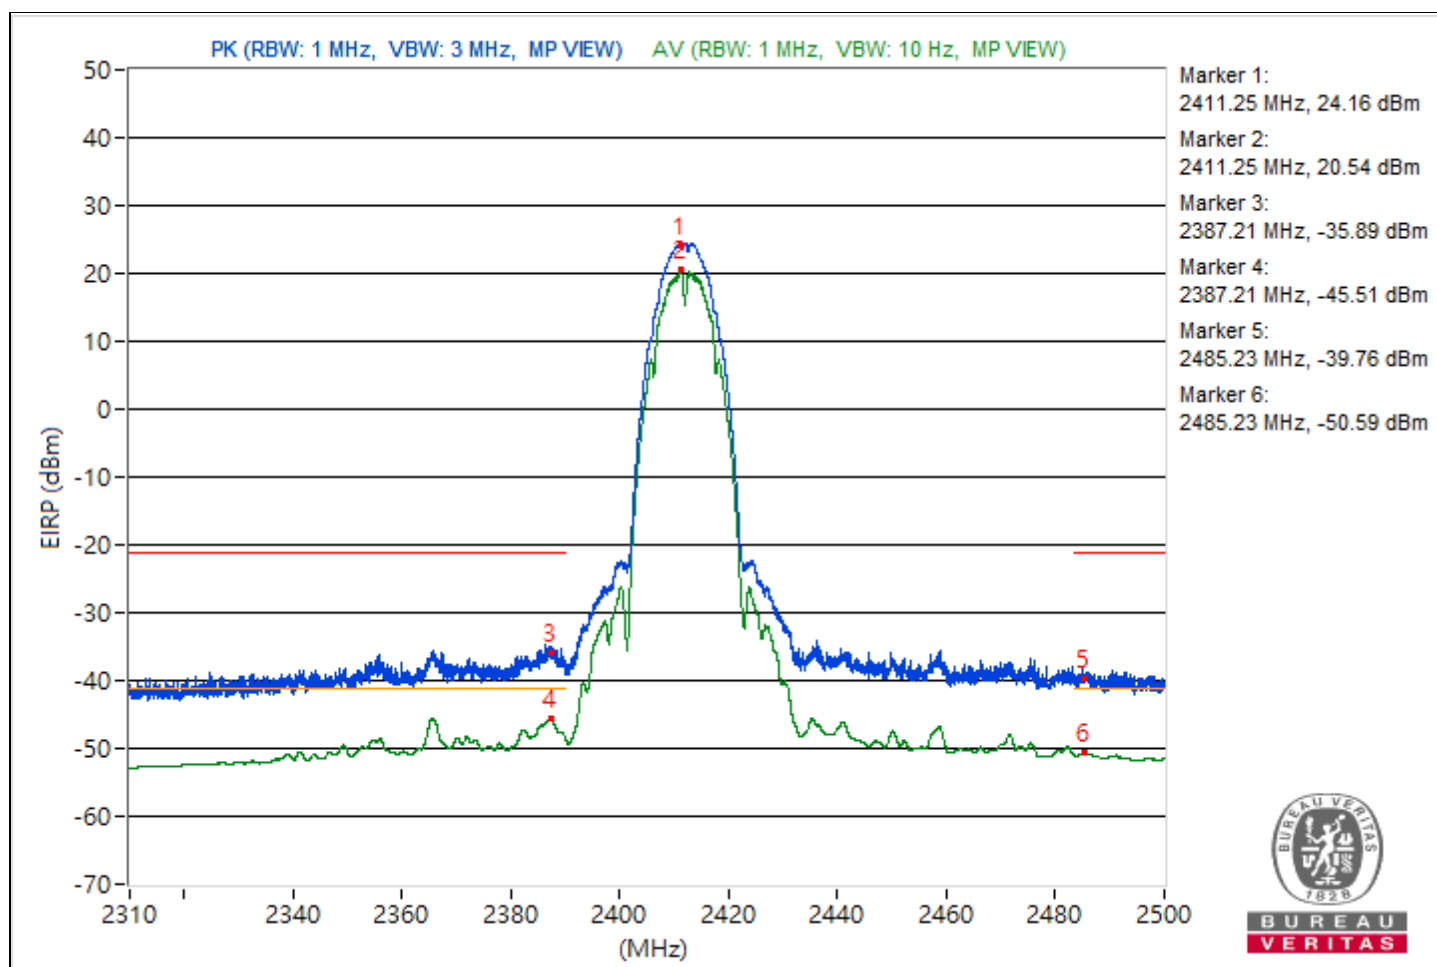


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2436.28	119.42 PK			17.97	6.19	24.16
2	*2436.28	115.91 AV			14.46	6.19	20.65
3	2389.97	58.29 PK	74	-15.71	-43.16	6.19	-36.97
4	2389.97	48.48 AV	54	-5.52	-52.97	6.19	-46.78
5	2483.68	58.39 PK	74	-15.61	-43.06	6.19	-36.87
6	2483.68	48.39 AV	54	-5.61	-53.06	6.19	-46.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

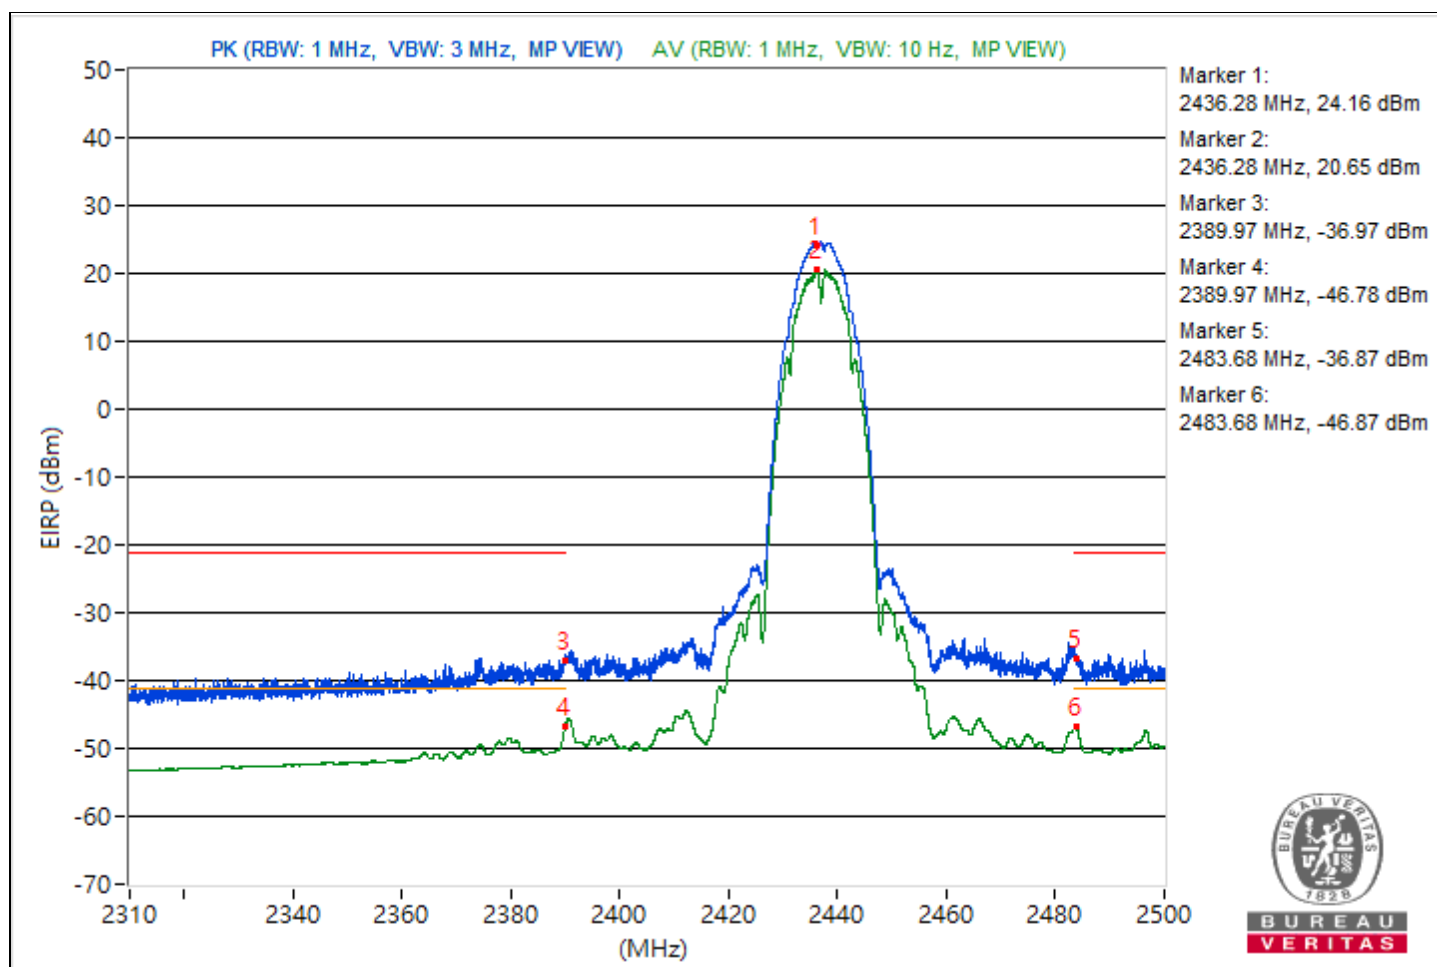


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2461.26	119.43 PK			17.98	6.19	24.17
2	*2461.26	115.95 AV			14.5	6.19	20.69
3	2389.16	54.94 PK	74	-19.06	-46.51	6.19	-40.32
4	2389.16	44.25 AV	54	-9.75	-57.2	6.19	-51.01
5	2499.83	58.05 PK	74	-15.95	-43.4	6.19	-37.21
6	2499.83	50.49 AV	54	-3.51	-50.96	6.19	-44.77

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

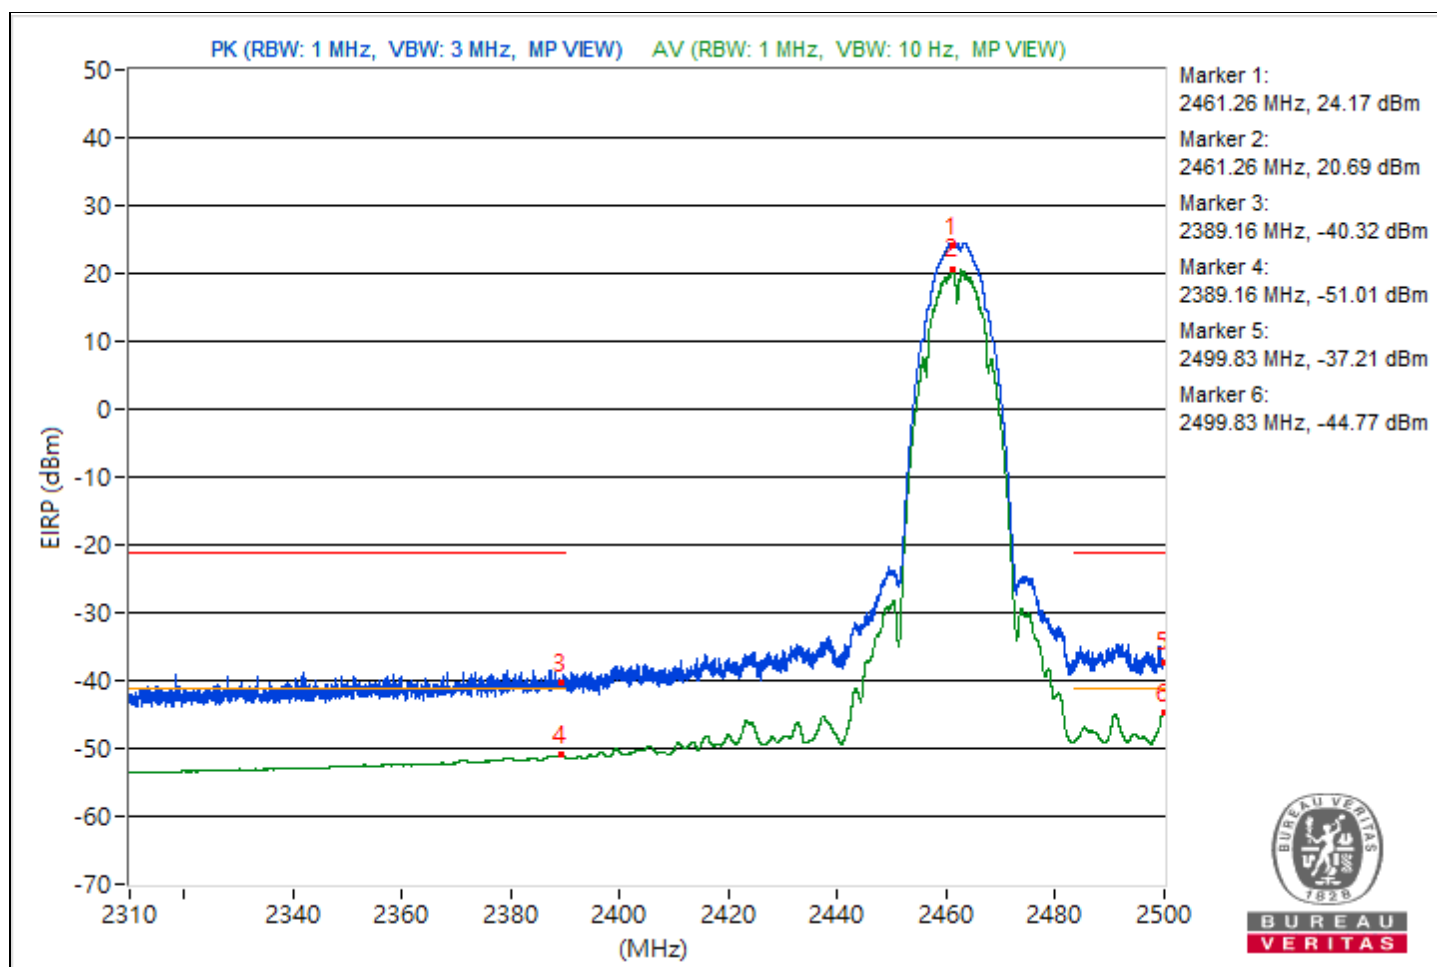


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2466.25	112.47 PK			11.02	6.19	17.21
2	*2466.25	109.15 AV			7.7	6.19	13.89
3	2388.28	53.98 PK	74	-20.02	-47.47	6.19	-41.28
4	2388.28	43.16 AV	54	-10.84	-58.29	6.19	-52.1
5	2483.52	62.07 PK	74	-11.93	-39.38	6.19	-33.19
6	2483.52	53.36 AV	54	-0.64	-48.09	6.19	-41.9

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

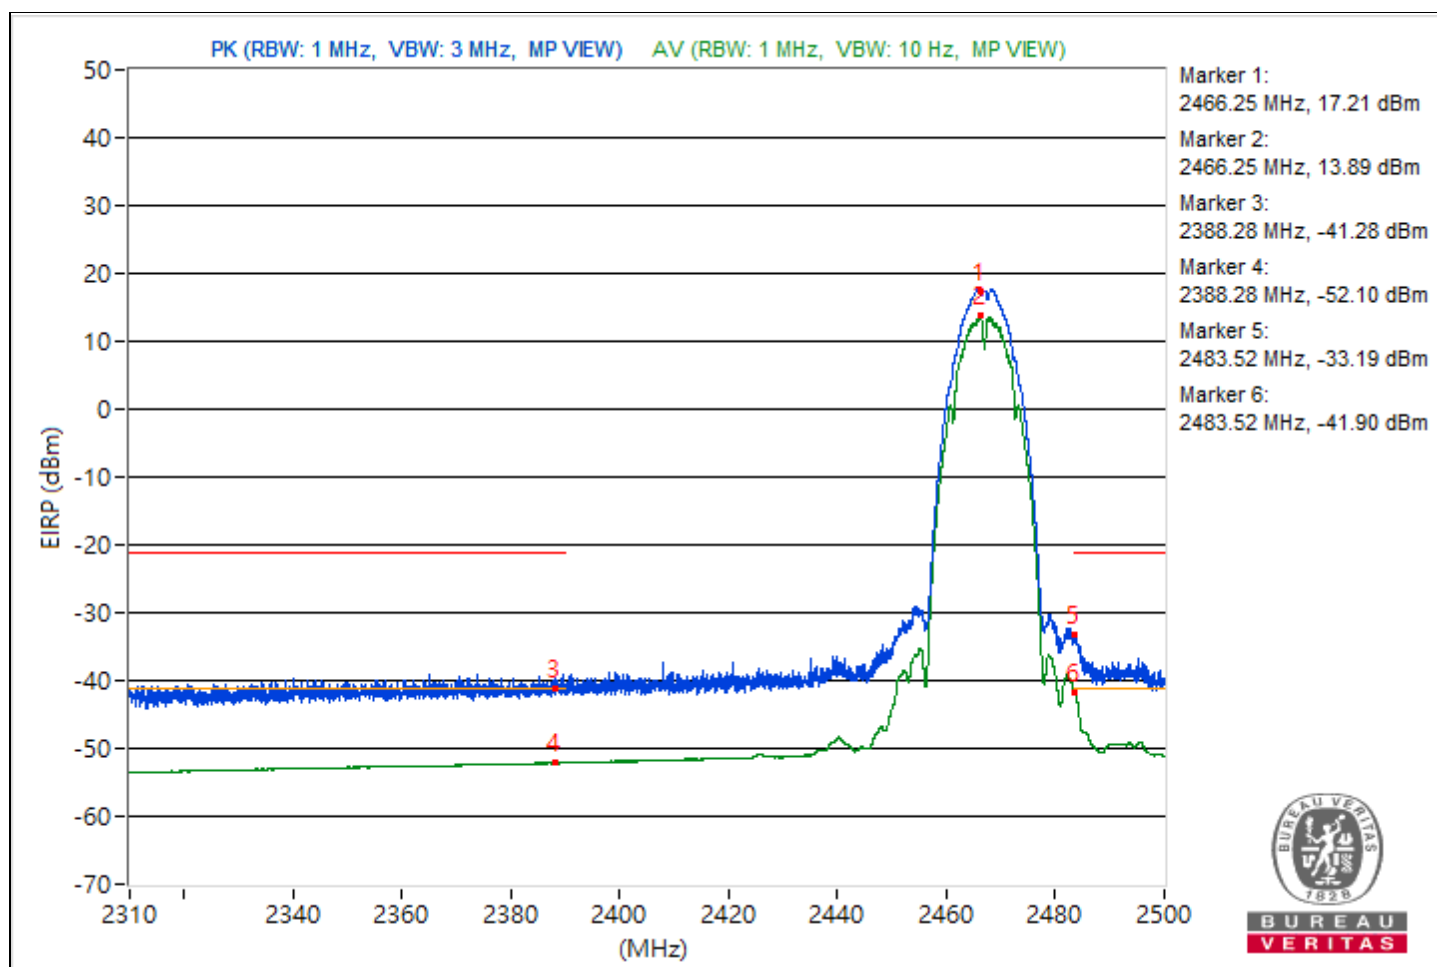


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2471.14	107.94 PK			6.49	6.19	12.68
2	*2471.14	104.45 AV			3	6.19	9.19
3	2389.35	50.87 PK	74	-23.13	-50.58	6.19	-44.39
4	2389.35	41 AV	54	-13	-60.45	6.19	-54.26
5	2484.73	59.85 PK	74	-14.15	-41.6	6.19	-35.41
6	2484.73	53.47 AV	54	-0.53	-47.98	6.19	-41.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

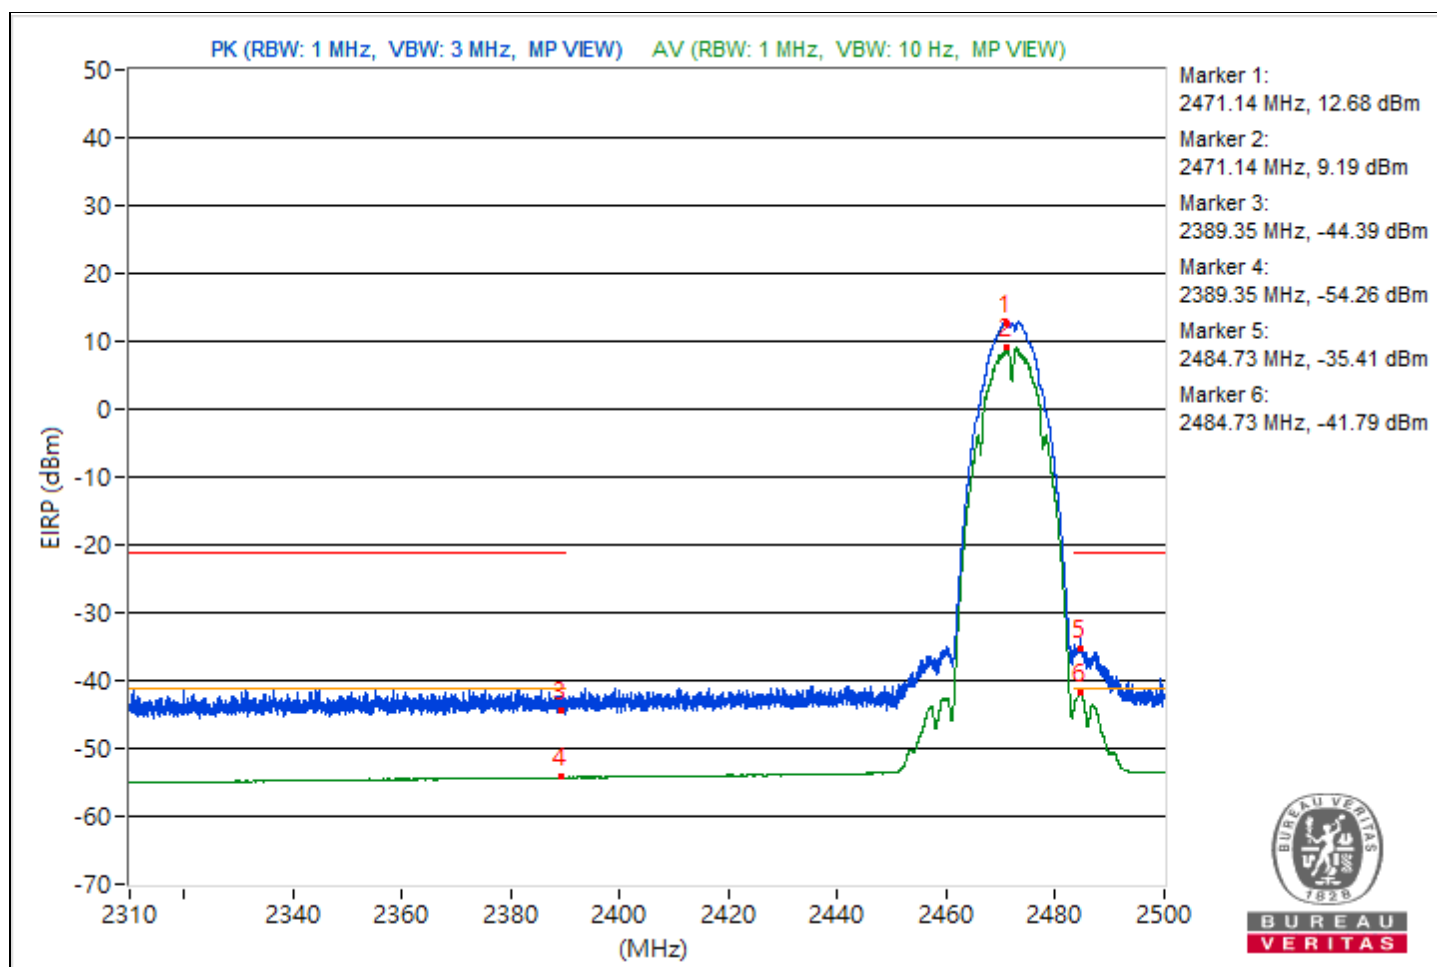


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2410.56	118.54 PK			17.09	6.19	23.28
2	*2410.56	108.76 AV			7.31	6.19	13.5
3	2389.97	63.56 PK	74	-10.44	-37.89	6.19	-31.7
4	2389.97	51.62 AV	54	-2.38	-49.83	6.19	-43.64
5	2486.27	55.89 PK	74	-18.11	-45.56	6.19	-39.37
6	2486.27	44.51 AV	54	-9.49	-56.94	6.19	-50.75

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

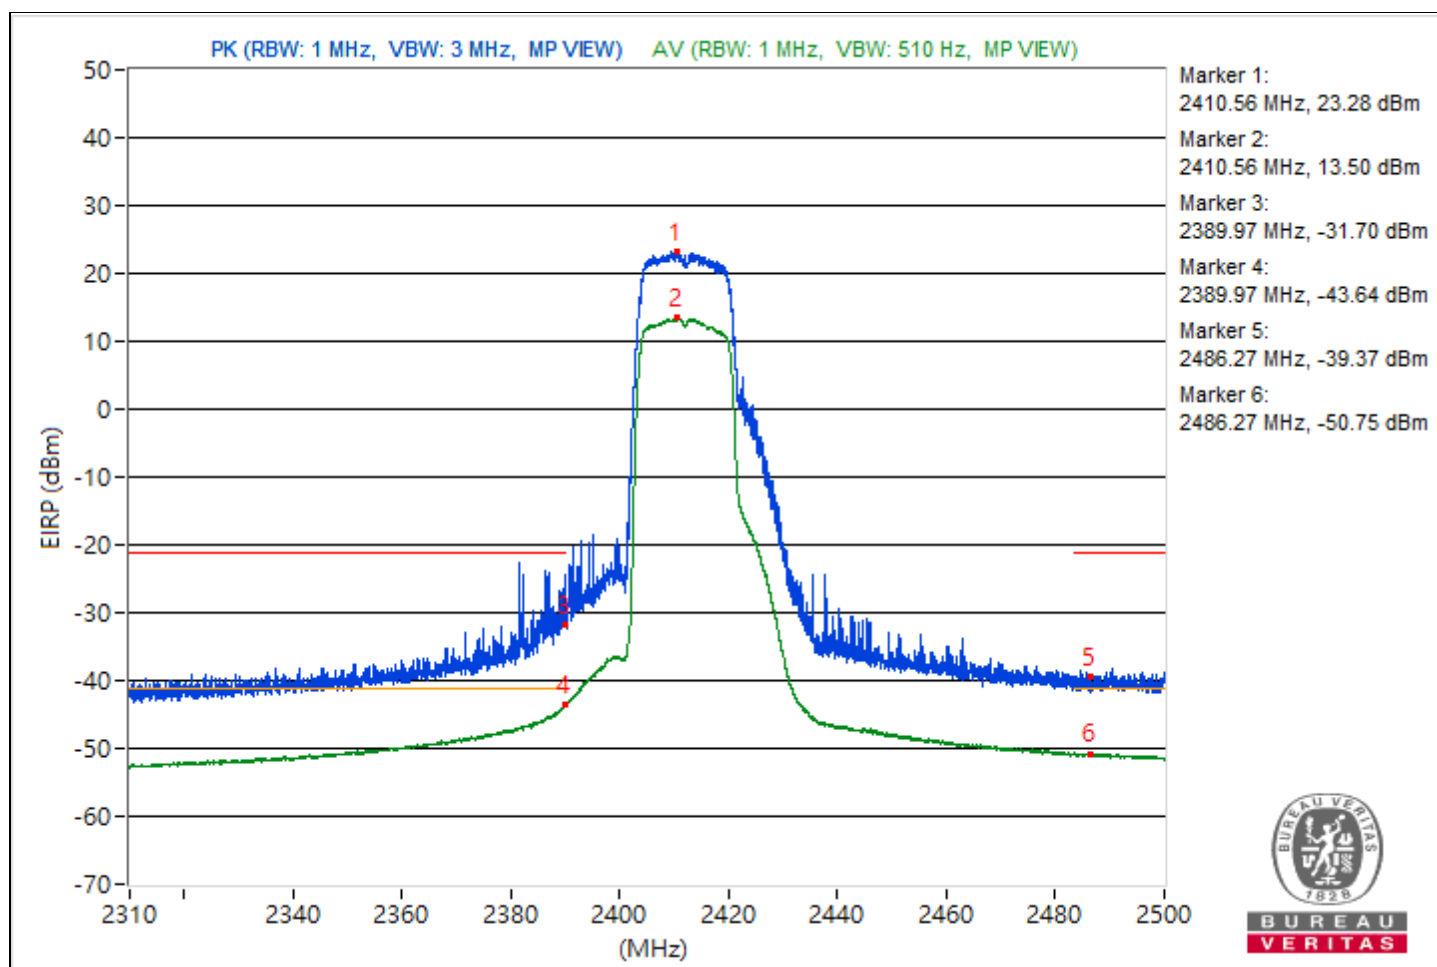


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2437.94	120.07 PK			18.62	6.19	24.81
2	*2437.94	111.01 AV			9.56	6.19	15.75
3	2389.82	62.61 PK	74	-11.39	-38.84	6.19	-32.65
4	2389.82	49.1 AV	54	-4.9	-52.35	6.19	-46.16
5	2484.02	62.74 PK	74	-11.26	-38.71	6.19	-32.52
6	2484.02	49.41 AV	54	-4.59	-52.04	6.19	-45.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

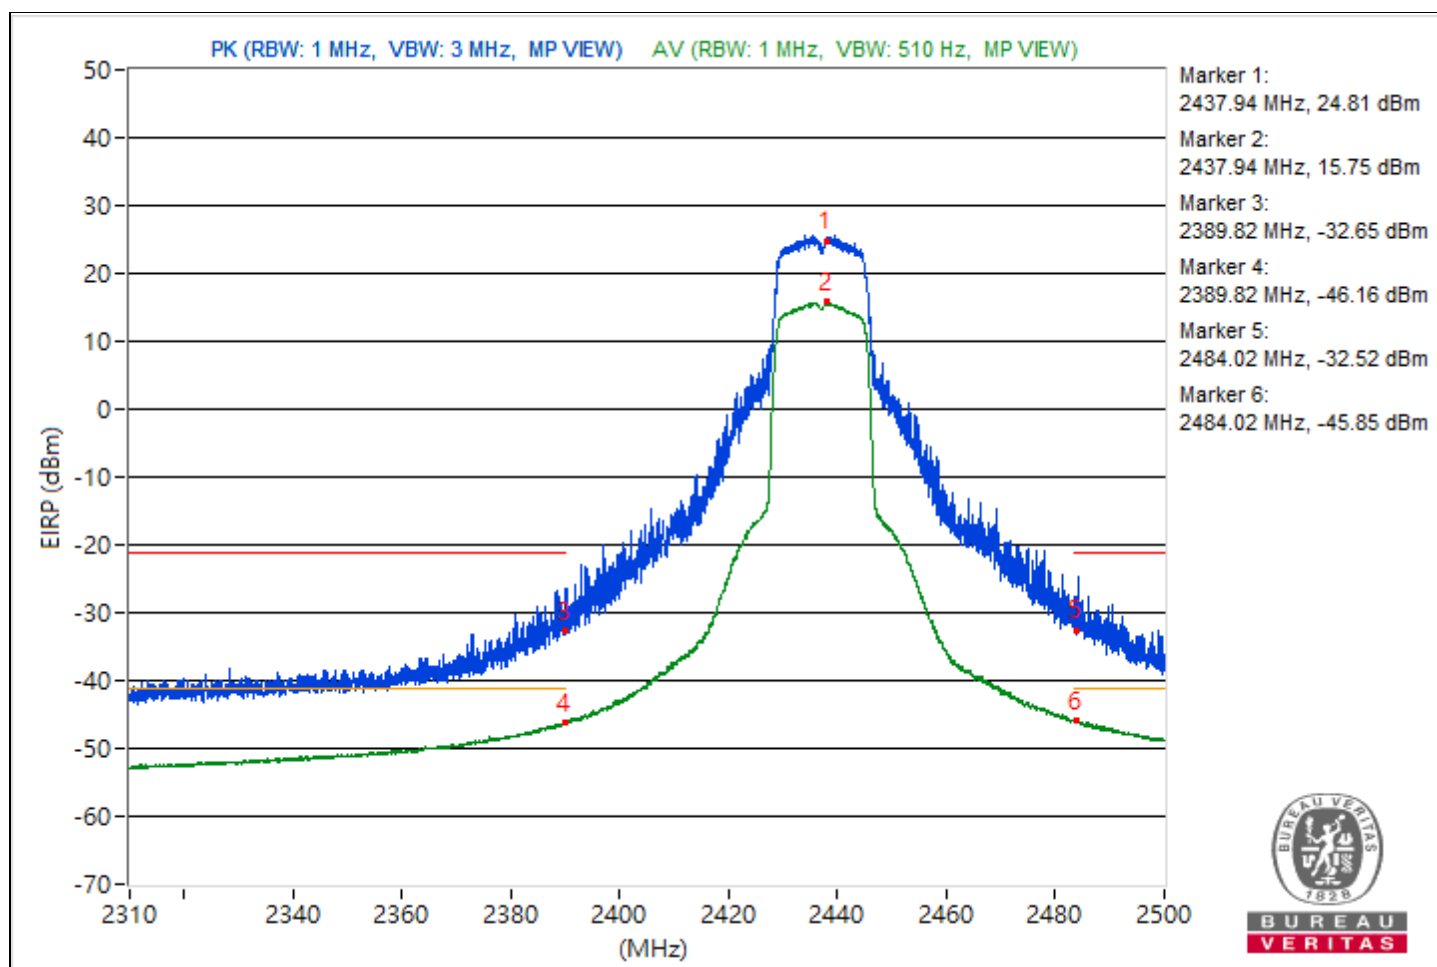


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2460.79	117.77 PK			16.32	6.19	22.51
2	*2460.79	109.89 AV			8.44	6.19	14.63
3	2386.05	54.3 PK	74	-19.7	-47.15	6.19	-40.96
4	2386.05	46 AV	54	-8	-55.45	6.19	-49.26
5	2483.54	64.4 PK	74	-9.6	-37.05	6.19	-30.86
6	2483.54	52.9 AV	54	-1.1	-48.55	6.19	-42.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

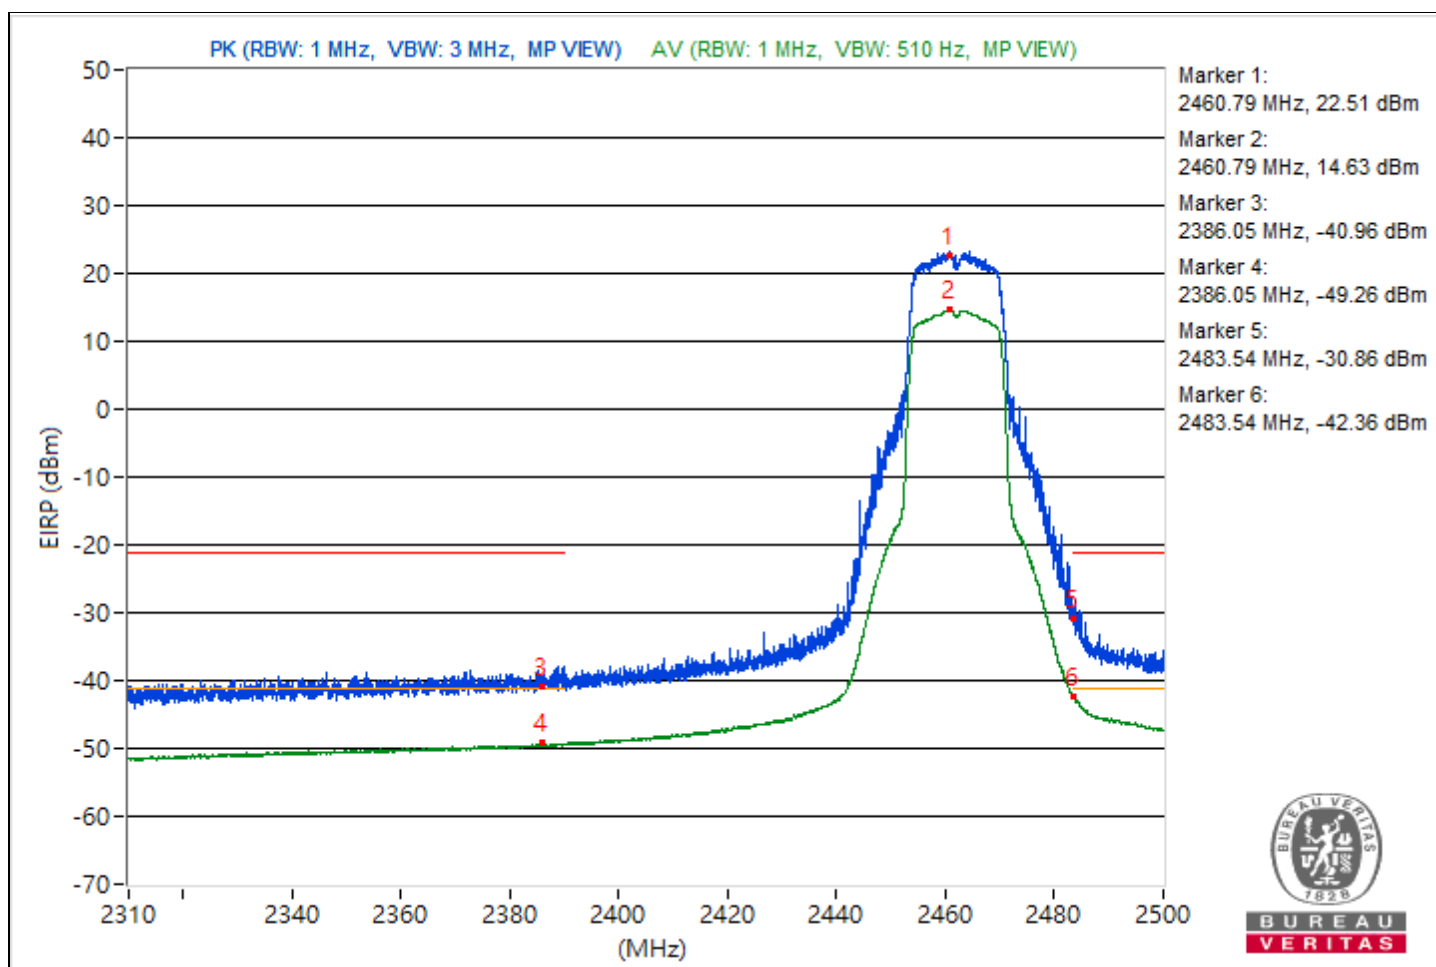


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2465.92	116.18 PK			14.73	6.19	20.92
2	*2465.92	108.25 AV			6.8	6.19	12.99
3	2389.51	54.47 PK	74	-19.53	-46.98	6.19	-40.79
4	2389.51	45.5 AV	54	-8.5	-55.95	6.19	-49.76
5	2483.68	64.67 PK	74	-9.33	-36.78	6.19	-30.59
6	2483.68	53.41 AV	54	-0.59	-48.04	6.19	-41.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

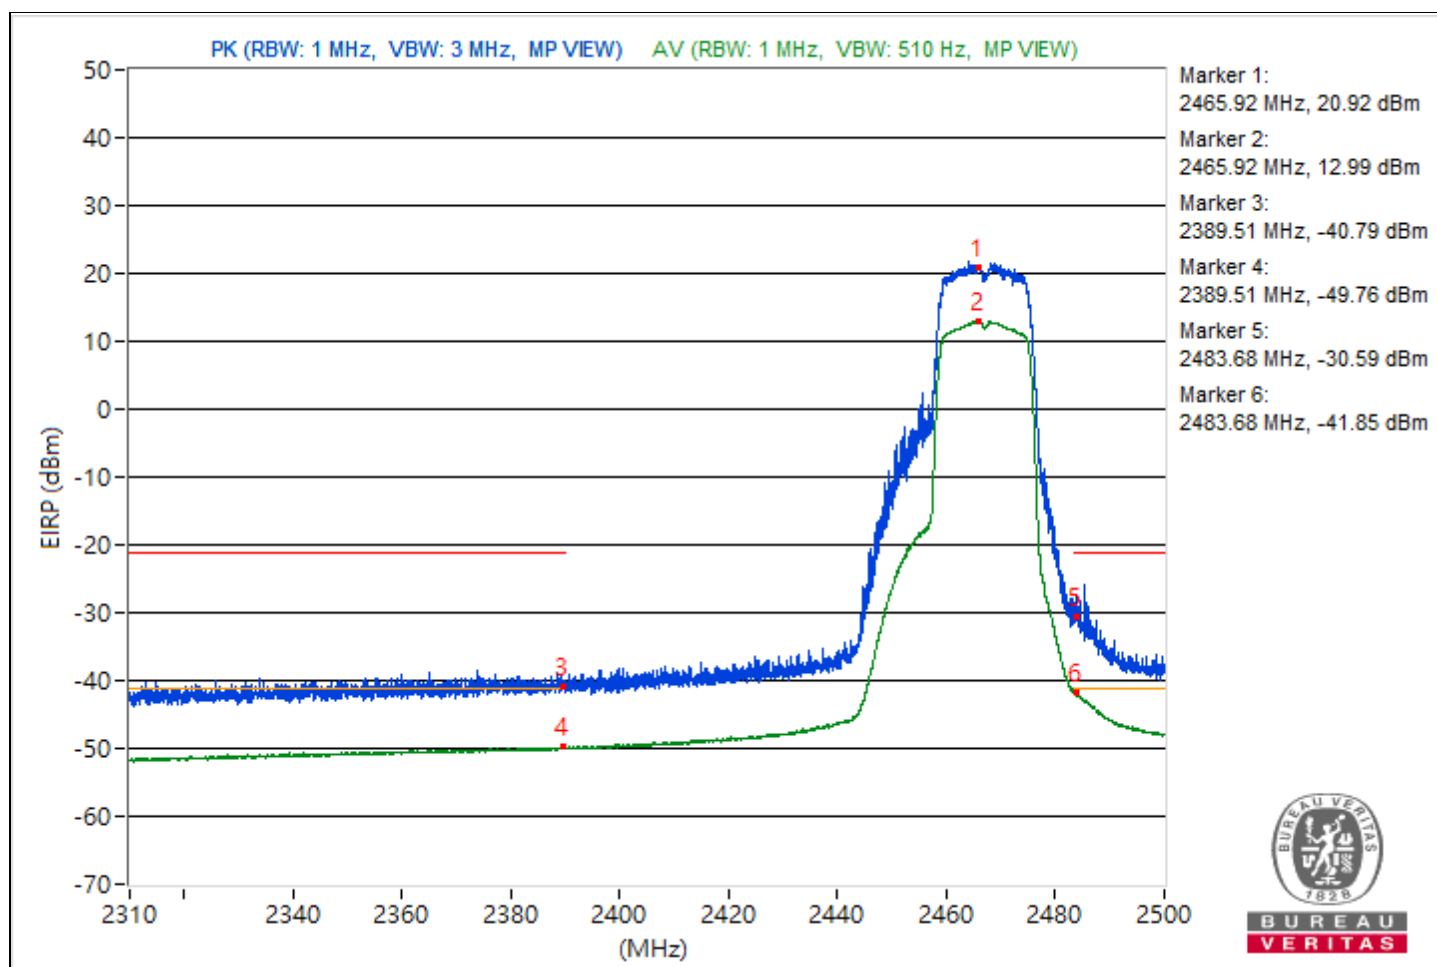


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2473.23	113.04 PK			11.59	6.19	17.78
2	*2473.23	105.81 AV			4.36	6.19	10.55
3	2384.57	54.43 PK	74	-19.57	-47.02	6.19	-40.83
4	2384.57	45.15 AV	54	-8.85	-56.3	6.19	-50.11
5	2483.52	62.46 PK	74	-11.54	-38.99	6.19	-32.8
6	2483.52	53.5 AV	54	-0.5	-47.95	6.19	-41.76

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

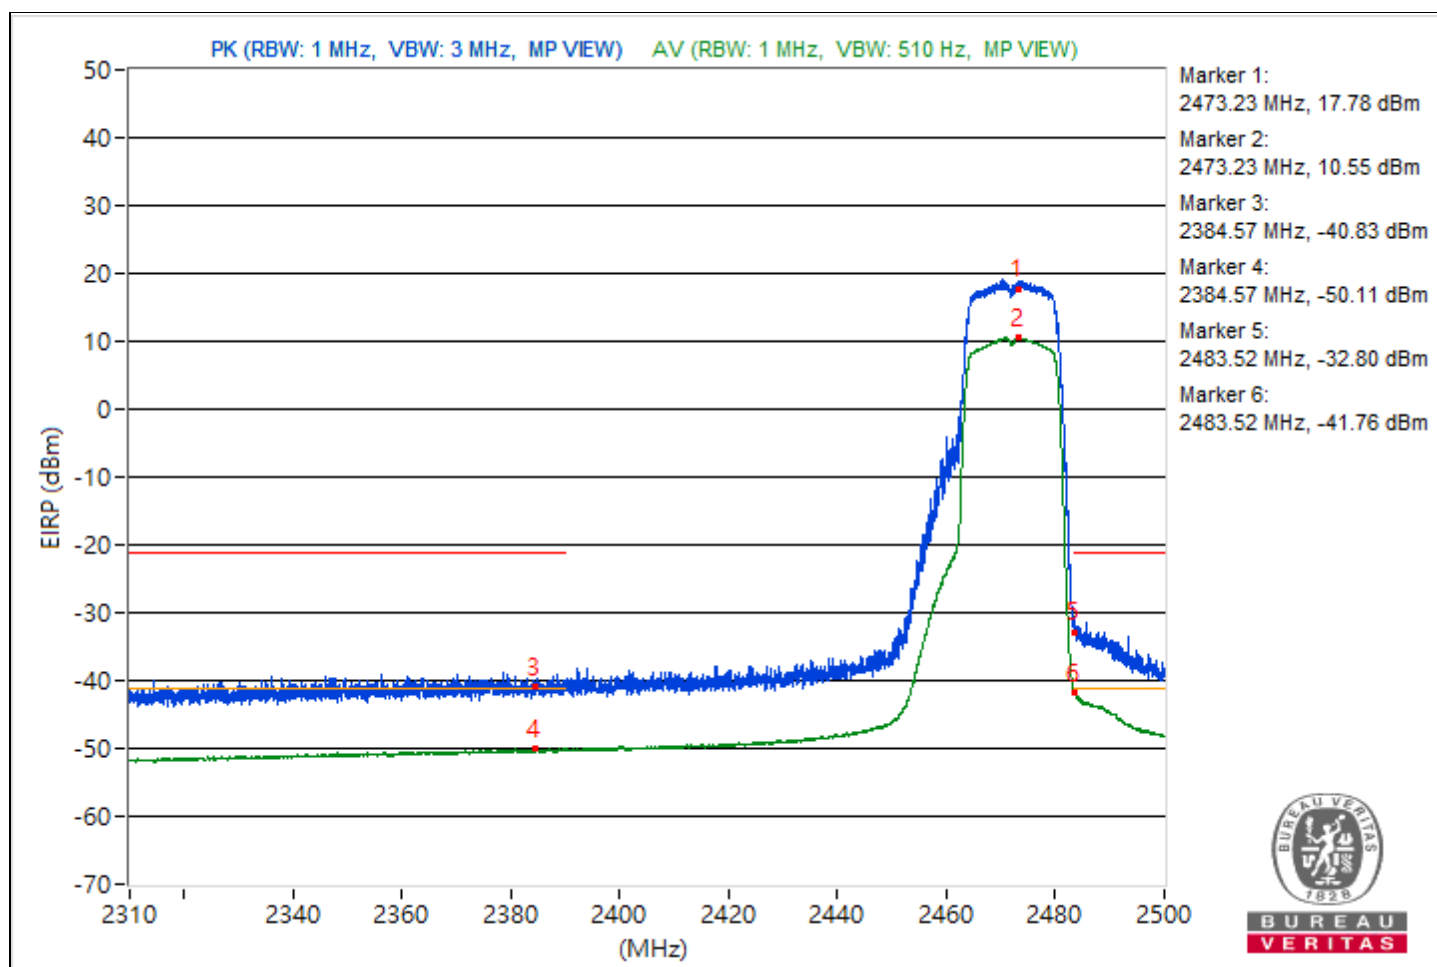


1S1T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2410.51	117.17 PK			15.72	6.19	21.91
2	*2410.51	108.41 AV			6.96	6.19	13.15
3	2389.97	65.52 PK	74	-8.48	-35.93	6.19	-29.74
4	2389.97	53.03 AV	54	-0.97	-48.42	6.19	-42.23
5	2483.54	54.82 PK	74	-19.18	-46.63	6.19	-40.44
6	2483.54	45.9 AV	54	-8.1	-55.55	6.19	-49.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

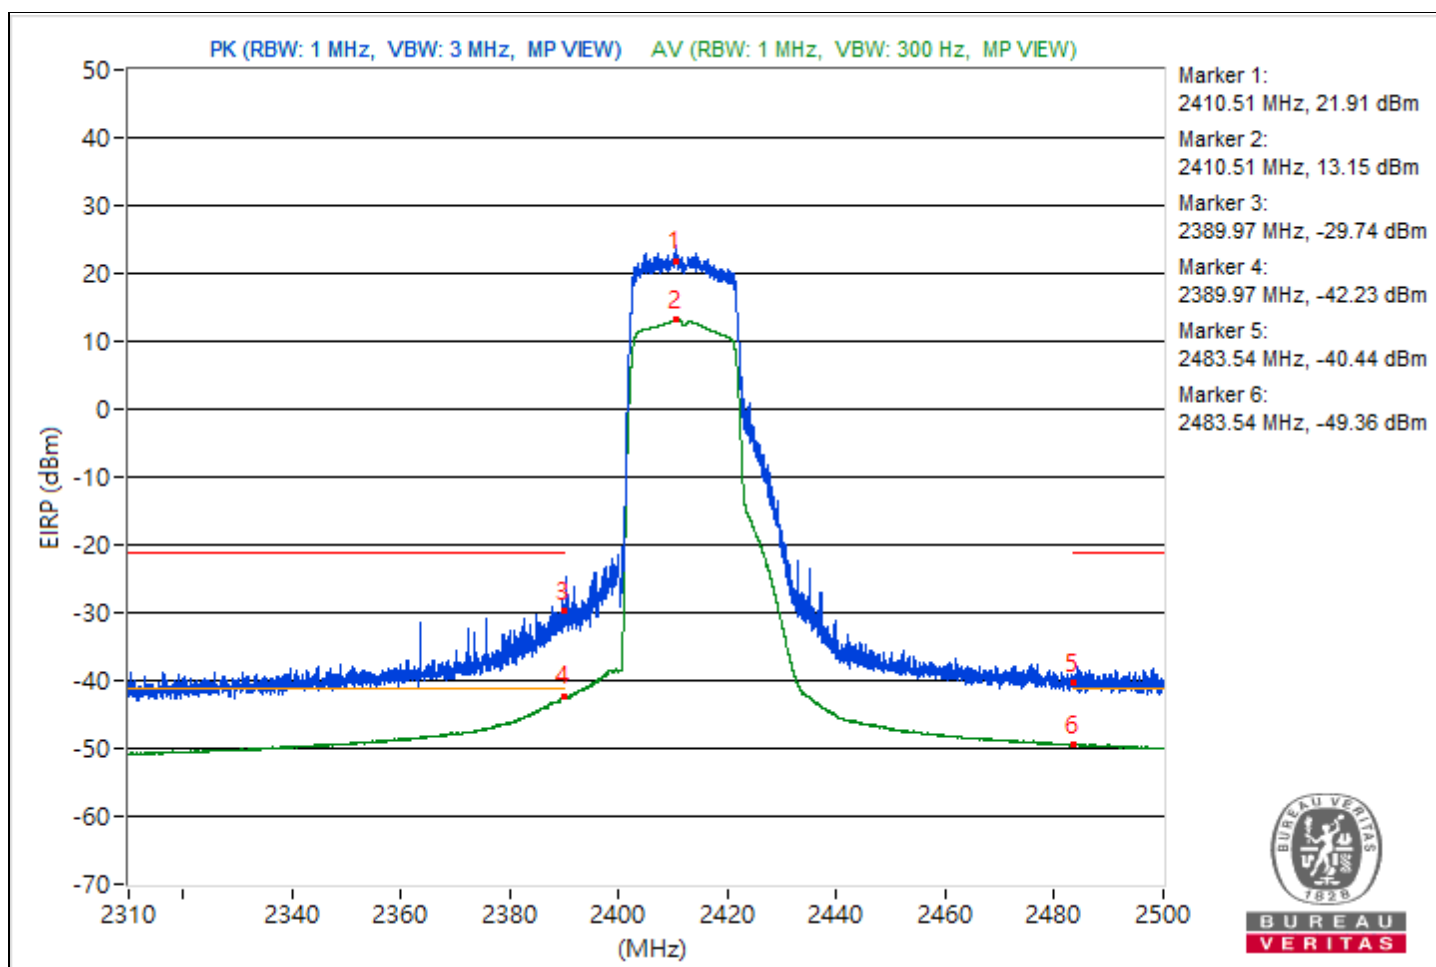


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2435.85	119.72 PK			18.27	6.19	24.46
2	*2435.85	110.27 AV			8.82	6.19	15.01
3	2389.16	63.32 PK	74	-10.68	-38.13	6.19	-31.94
4	2389.16	48.78 AV	54	-5.22	-52.67	6.19	-46.48
5	2483.64	63.81 PK	74	-10.19	-37.64	6.19	-31.45
6	2483.64	48.92 AV	54	-5.08	-52.53	6.19	-46.34

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

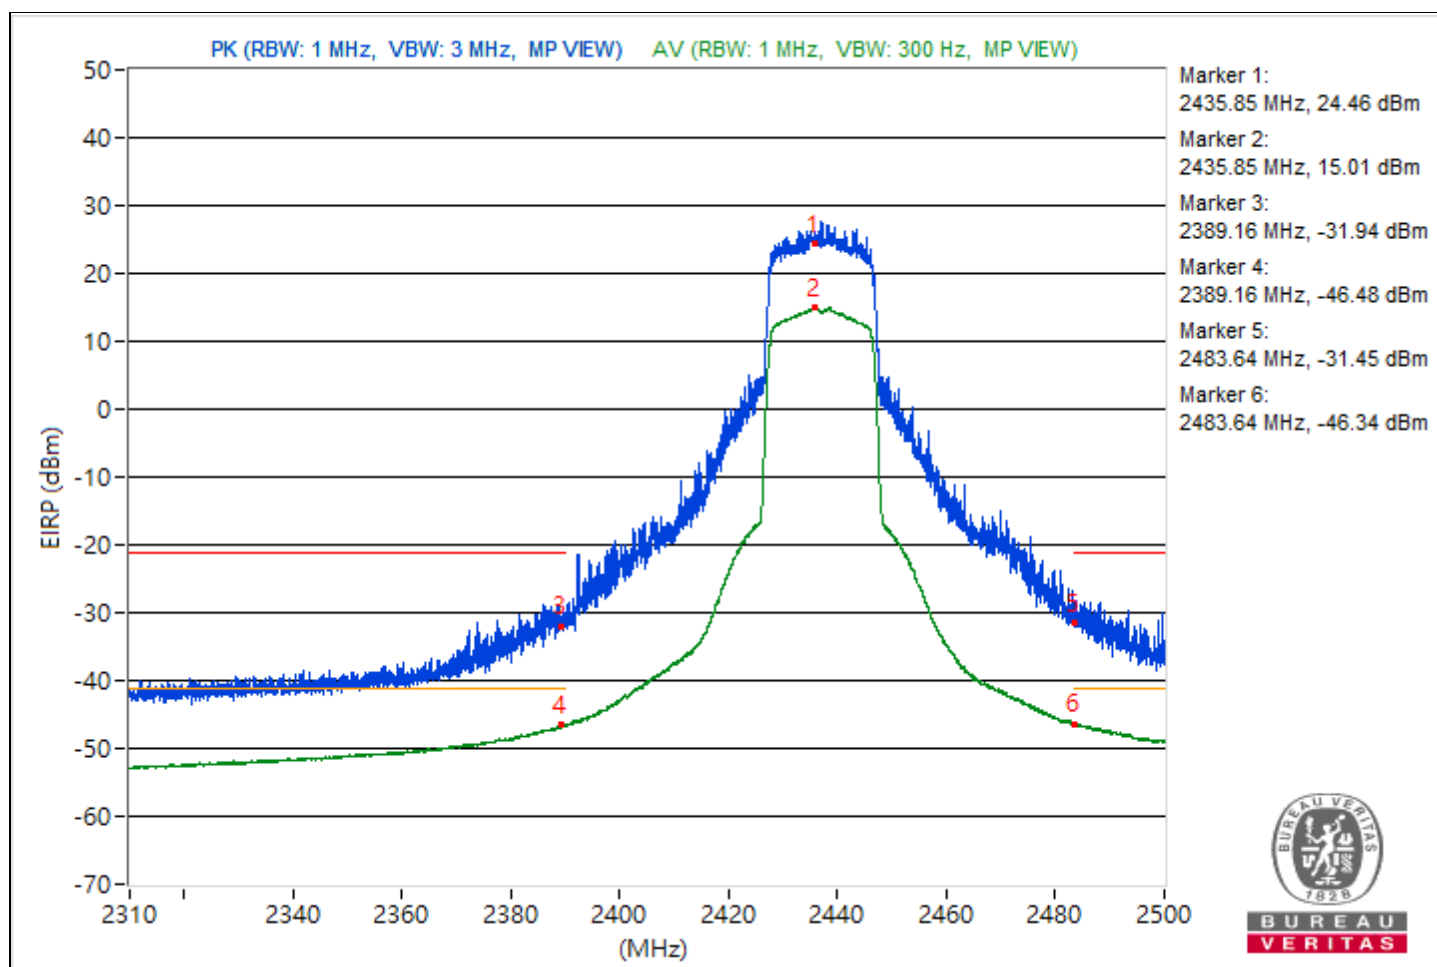


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2461.1	118.31 PK			16.86	6.19	23.05
2	*2461.1	108.33 AV			6.88	6.19	13.07
3	2389.63	54.26 PK	74	-19.74	-47.19	6.19	-41
4	2389.63	45.79 AV	54	-8.21	-55.66	6.19	-49.47
5	2483.54	65.08 PK	74	-8.92	-36.37	6.19	-30.18
6	2483.54	52.56 AV	54	-1.44	-48.89	6.19	-42.7

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

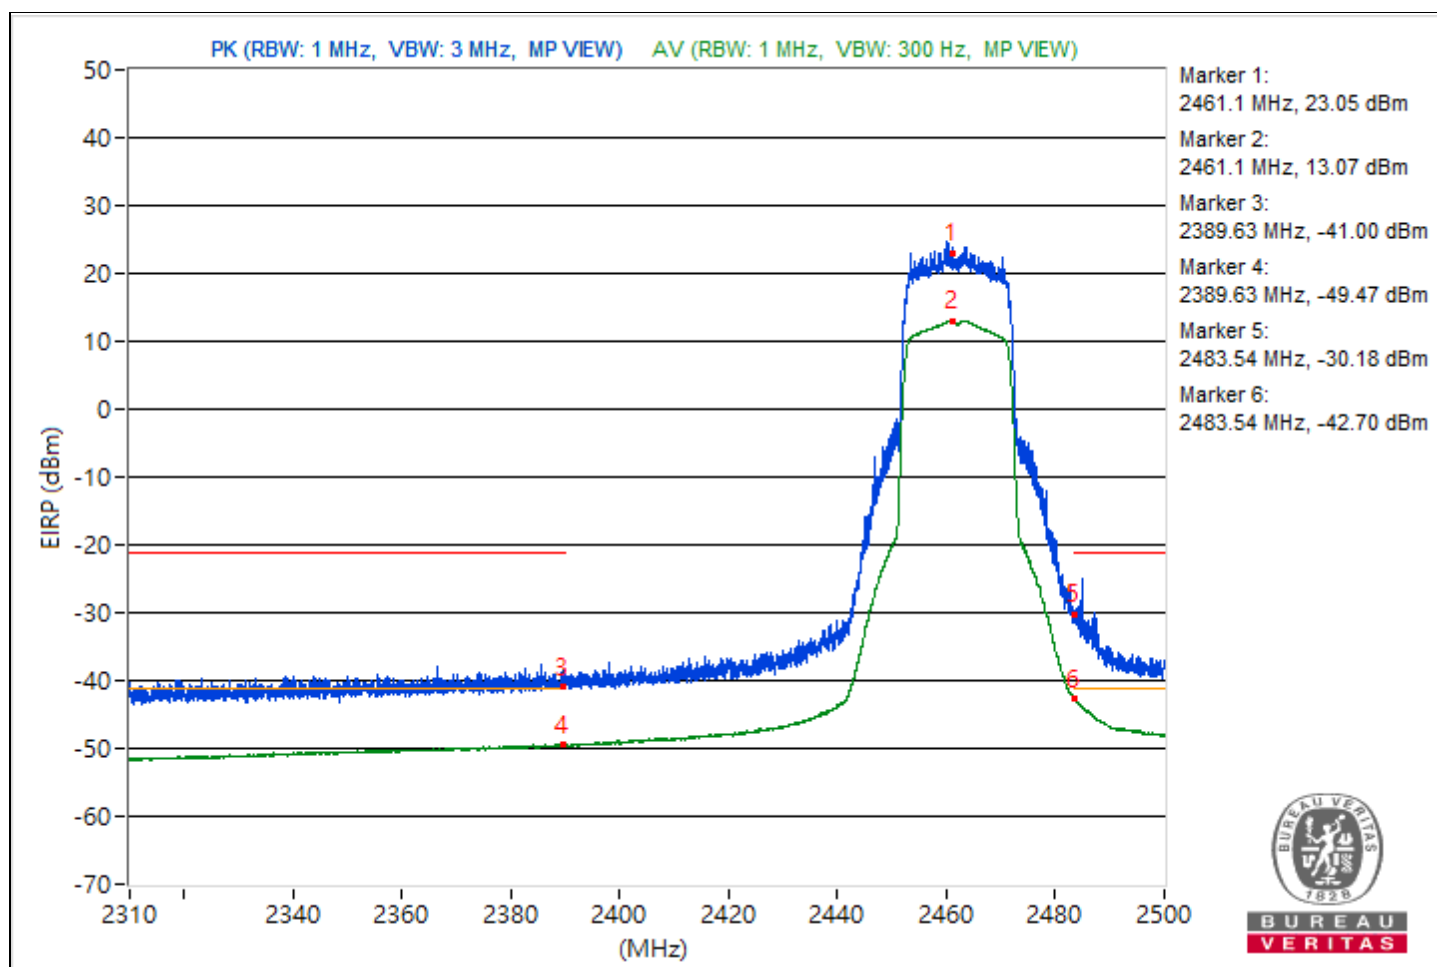


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2465.85	116.33 PK			14.88	6.19	21.07
2	*2465.85	106.97 AV			5.52	6.19	11.71
3	2389.68	55 PK	74	-19	-46.45	6.19	-40.26
4	2389.68	43.57 AV	54	-10.43	-57.88	6.19	-51.69
5	2483.54	65.73 PK	74	-8.27	-35.72	6.19	-29.53
6	2483.54	52.8 AV	54	-1.2	-48.65	6.19	-42.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

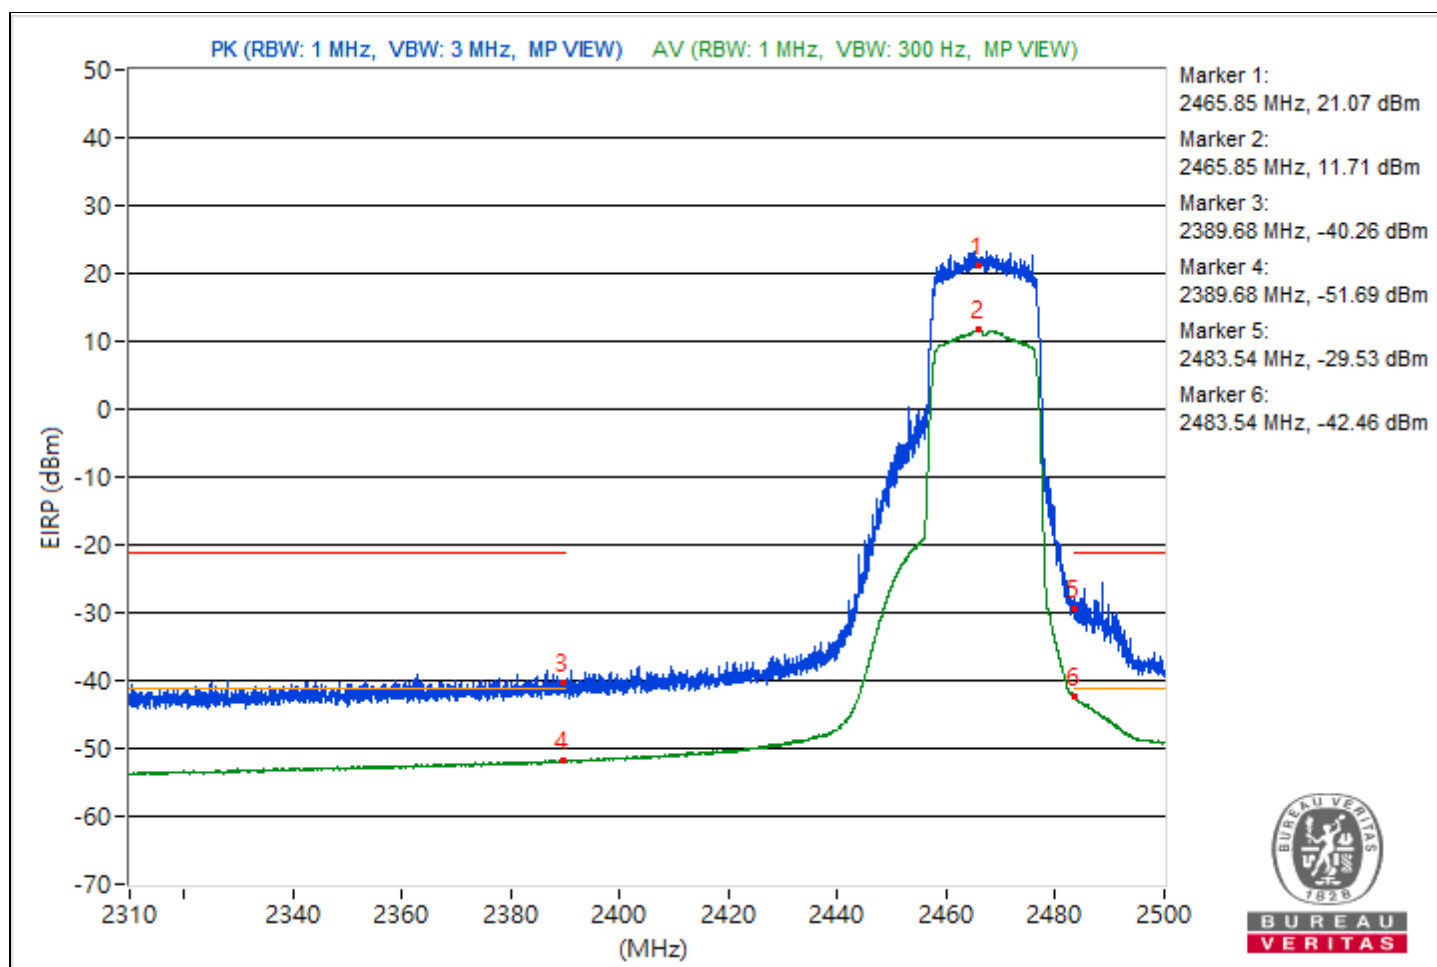

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		


Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	63.35 PK	74	-1.31	-38.1	6.19	-31.91
2	2483.5	52.69 AV	54	-10.65	-48.76	6.19	-42.57

Notes:

1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

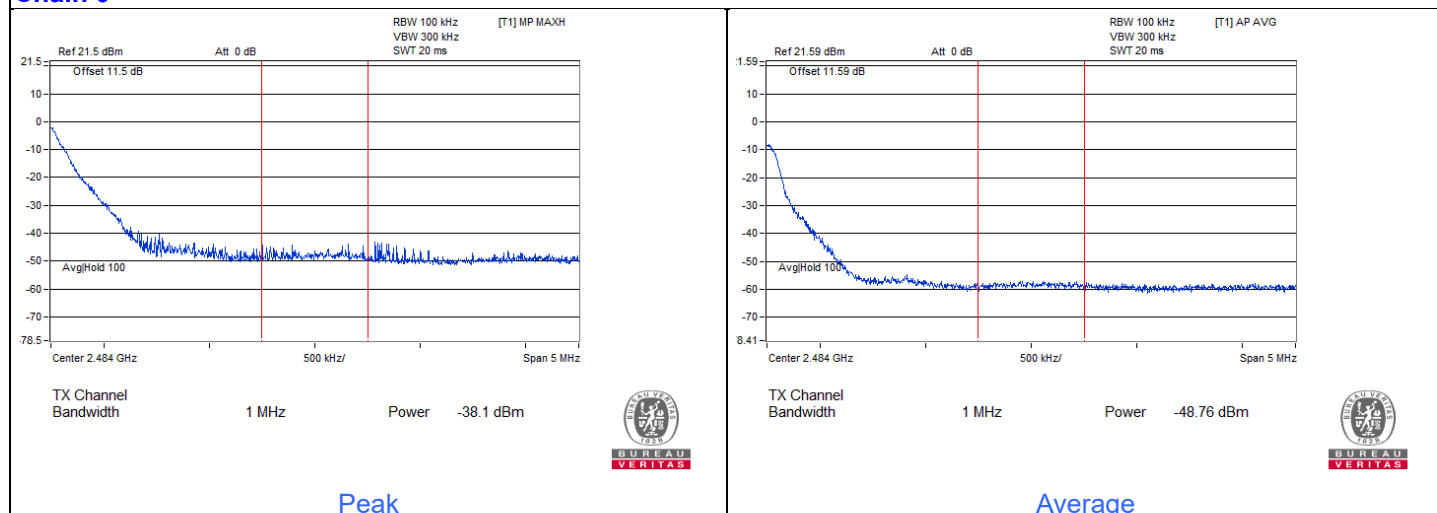


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2420.7	115 PK			13.55	6.19	19.74
2	*2420.7	103.41 AV			1.96	6.19	8.15
3	2389.97	65.48 PK	74	-8.52	-35.97	6.19	-29.78
4	2389.97	53.5 AV	54	-0.5	-47.95	6.19	-41.76
5	2484.56	57.7 PK	74	-16.3	-43.75	6.19	-37.56
6	2484.56	44.81 AV	54	-9.19	-56.64	6.19	-50.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

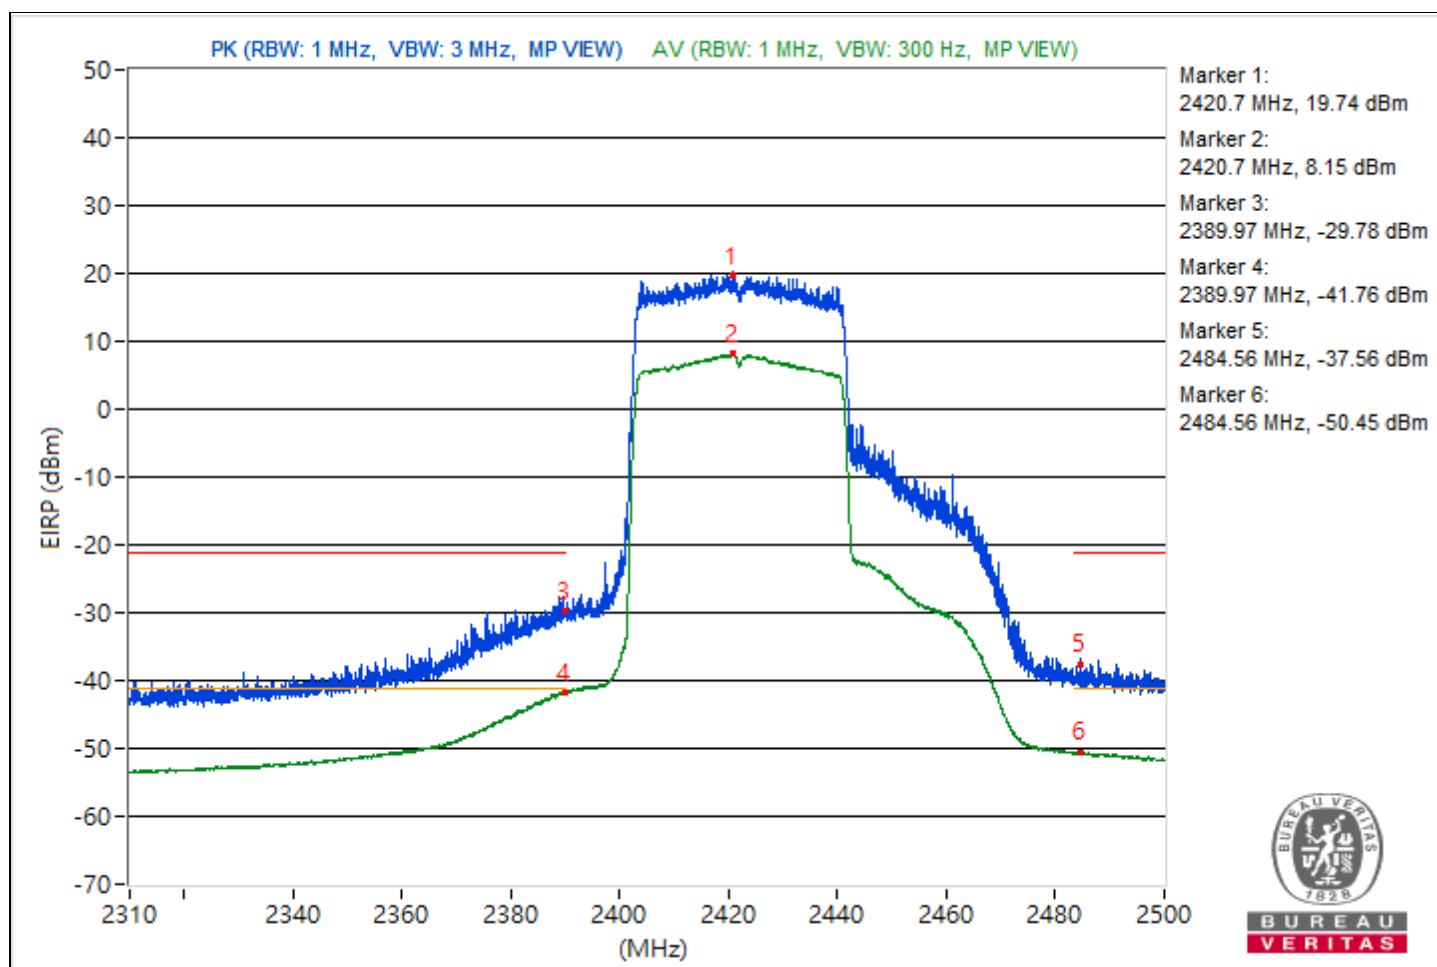


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2438.34	114.23 PK			12.78	6.19	18.97
2	*2438.34	106.01 AV			4.56	6.19	10.75
3	2389.87	59.51 PK	74	-14.49	-41.94	6.19	-35.75
4	2389.87	49.7 AV	54	-4.3	-51.75	6.19	-45.56
5	2483.57	62.58 PK	74	-11.42	-38.87	6.19	-32.68
6	2483.57	51.6 AV	54	-2.4	-49.85	6.19	-43.66

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

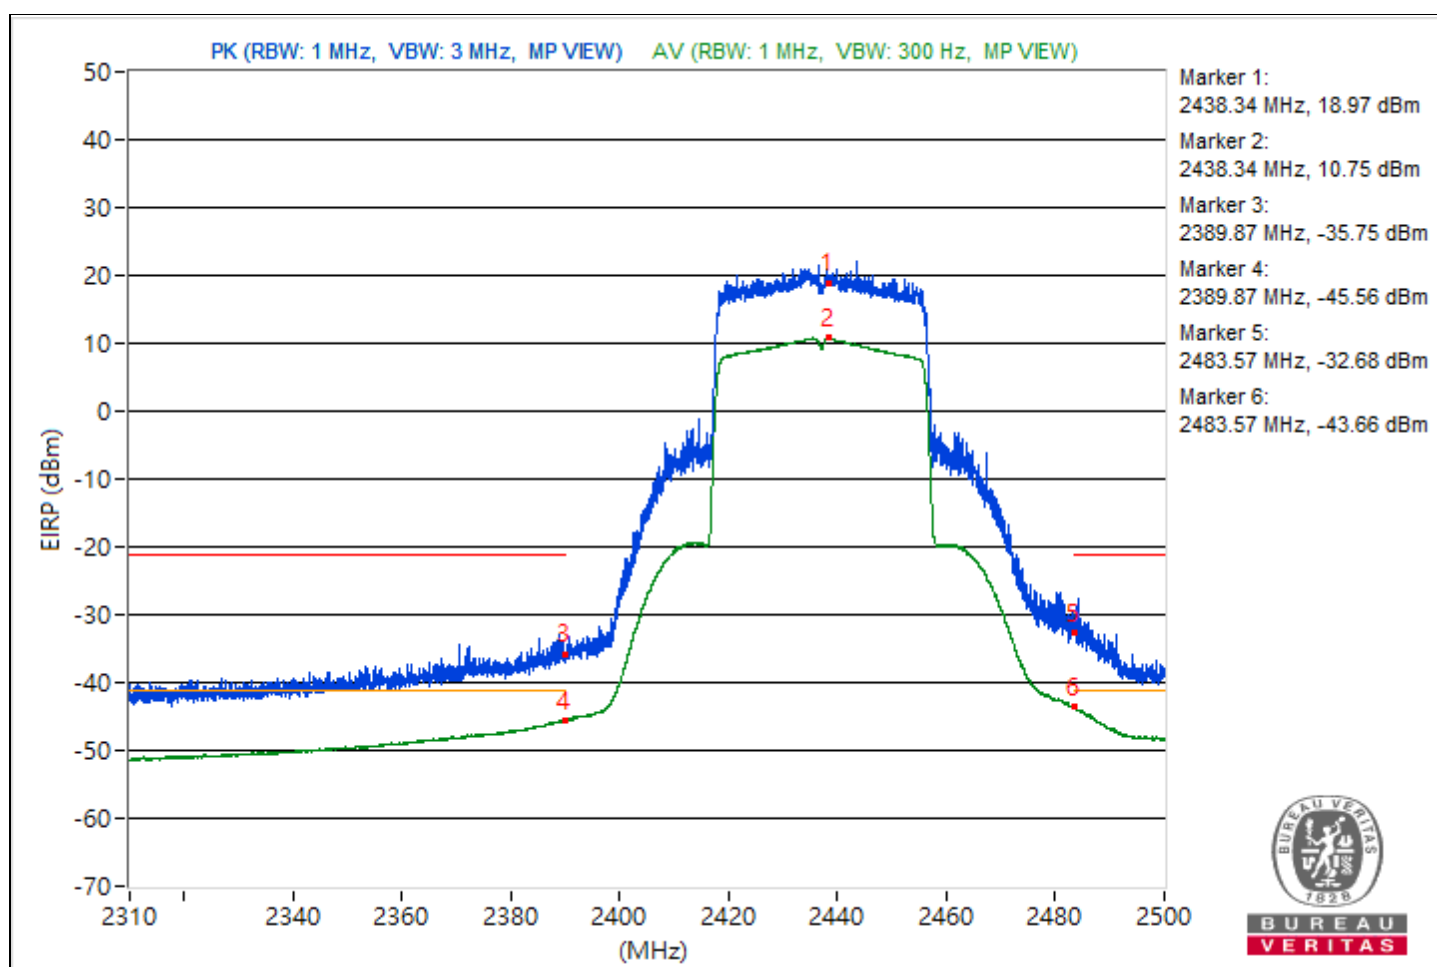


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2450.6	114.07 PK			12.62	6.19	18.81
2	*2450.6	103.8 AV			2.35	6.19	8.54
3	2388.66	57.47 PK	74	-16.53	-43.98	6.19	-37.79
4	2388.66	45.72 AV	54	-8.28	-55.73	6.19	-49.54
5	2483.8	63.85 PK	74	-10.15	-37.6	6.19	-31.41
6	2483.8	53.17 AV	54	-0.83	-48.28	6.19	-42.09

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

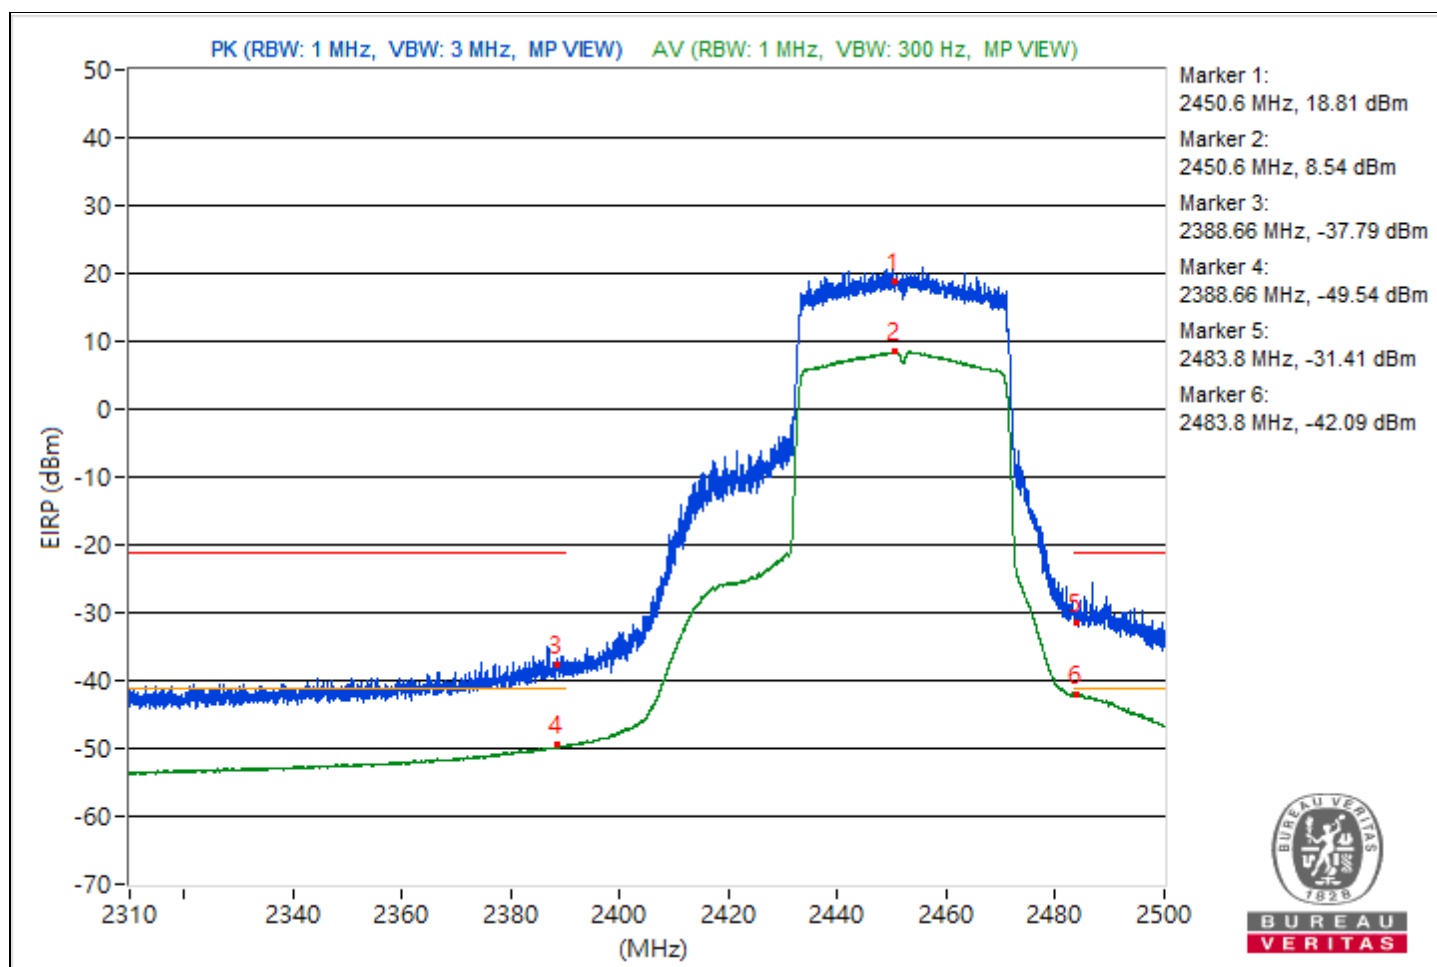


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2455.54	114.17 PK			12.72	6.19	18.91
2	*2455.54	103.78 AV			2.33	6.19	8.52
3	2389.75	56.56 PK	74	-17.44	-44.89	6.19	-38.7
4	2389.75	45.39 AV	54	-8.61	-56.06	6.19	-49.87
5	2484.21	67.25 PK	74	-6.75	-34.2	6.19	-28.01
6	2484.21	53.23 AV	54	-0.77	-48.22	6.19	-42.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

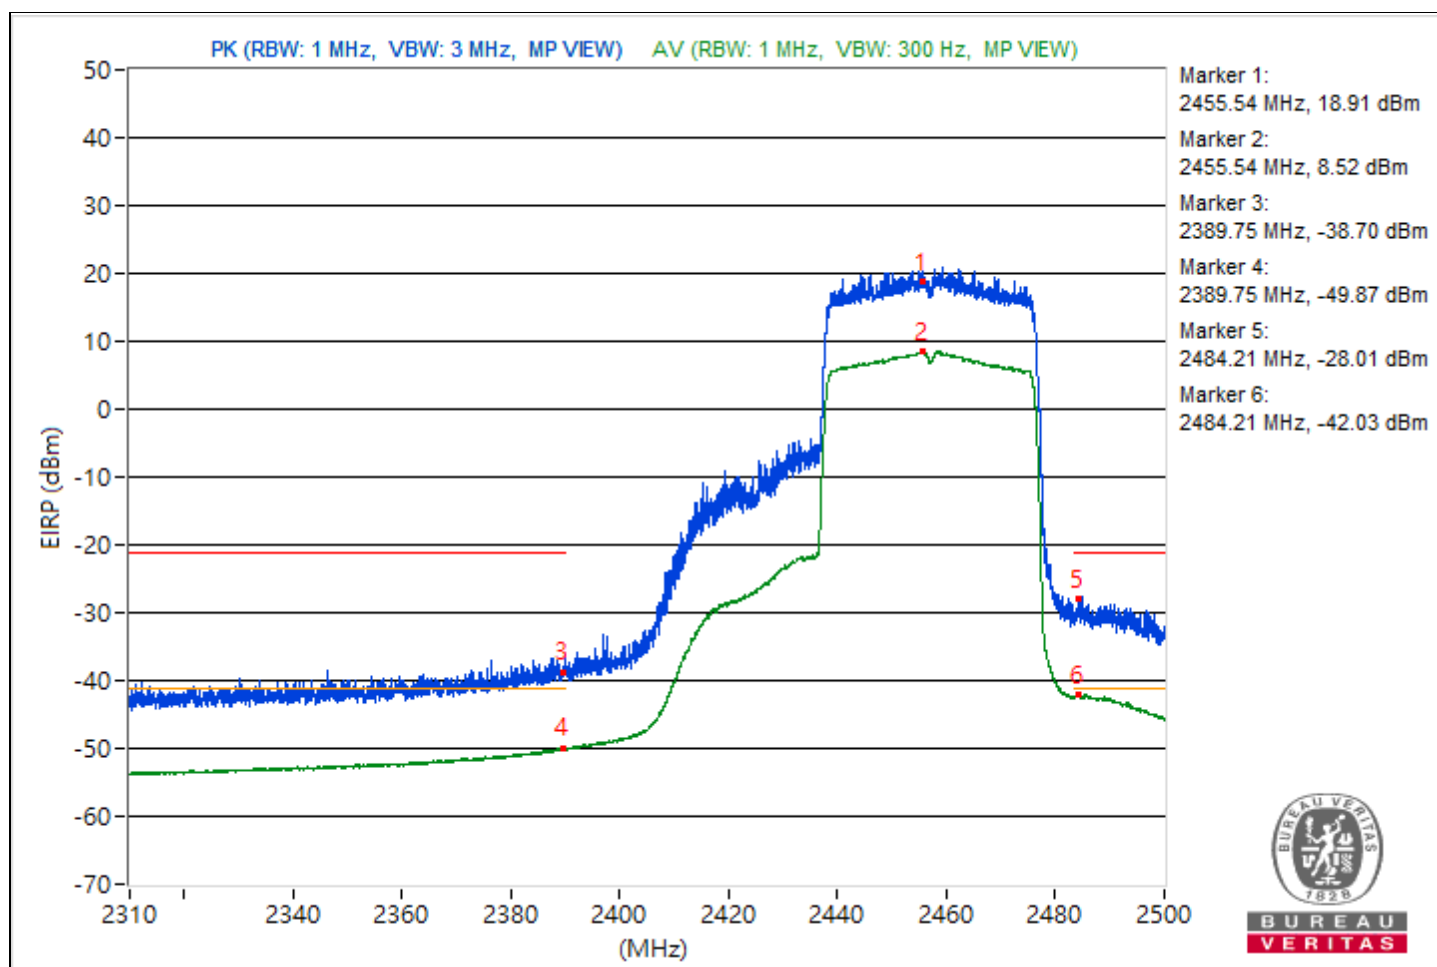

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		


Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	62.89 PK	74	-11.11	-38.56	6.19	-32.37
2	2483.5	52.98 AV	54	-1.02	-48.47	6.19	-42.28

Notes:

1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

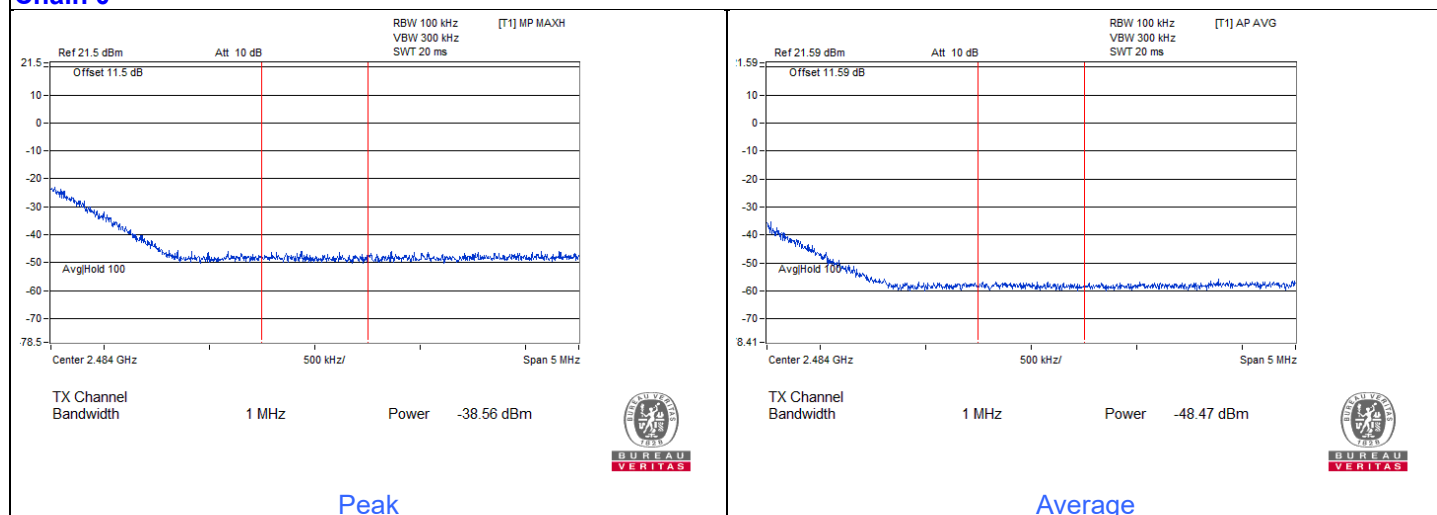


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2403.36	126.22 PK			24.77	6.19	30.96
2	*2403.55	114.8 AV			13.35	6.19	19.54
3	2389.97	72.23 PK	74	-1.77	-29.22	6.19	-23.03
4	2389.89	47.15 AV	54	-6.85	-54.3	6.19	-48.11
5	2485.01	61.04 PK	74	-12.96	-40.41	6.19	-34.22
6	2484.04	44.69 AV	54	-9.31	-56.76	6.19	-50.57

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

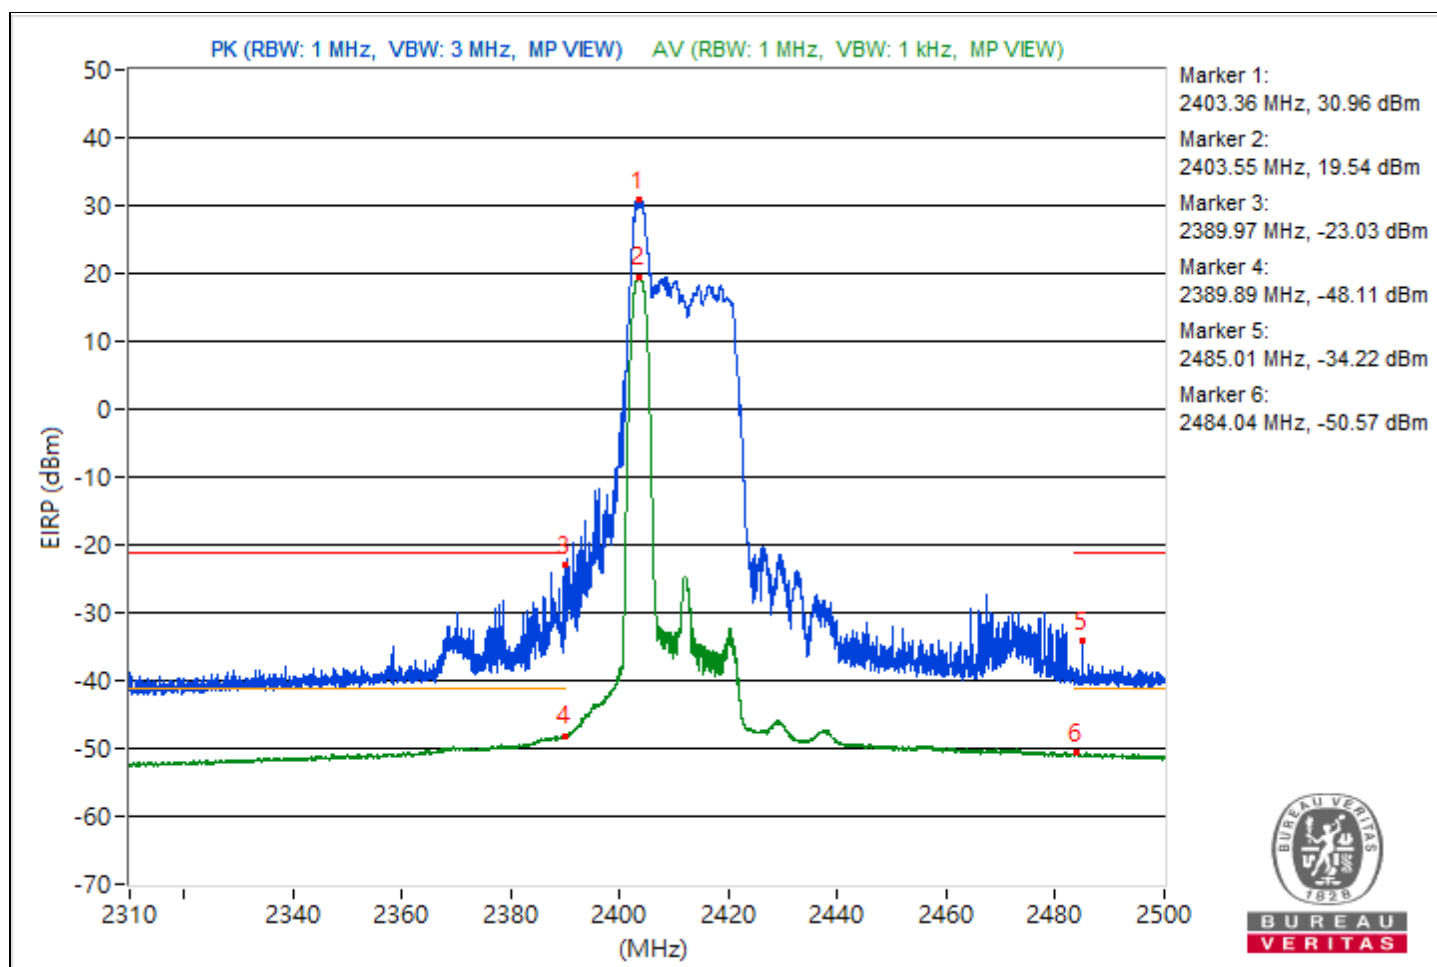


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2427.99	128.75 PK			27.3	6.19	33.49
2	*2428.44	118.62 AV			17.17	6.19	23.36
3	2377.95	67.76 PK	74	-6.24	-33.69	6.19	-27.5
4	2389.7	46.46 AV	54	-7.54	-54.99	6.19	-48.8
5	2483.52	69.64 PK	74	-4.36	-31.81	6.19	-25.62
6	2495.51	47.44 AV	54	-6.56	-54.01	6.19	-47.82

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

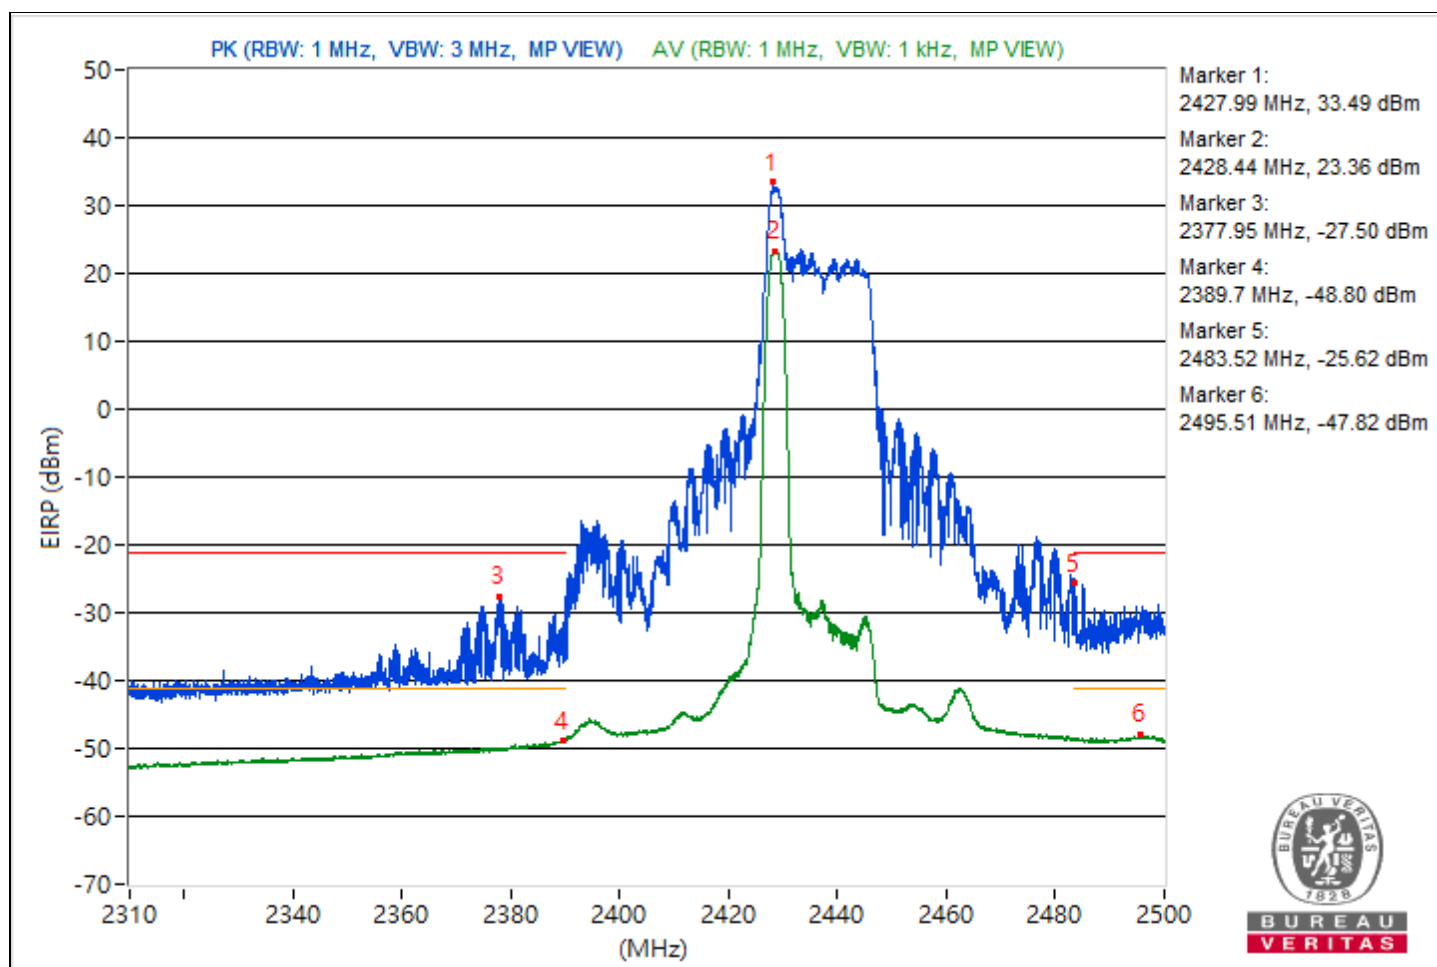


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2470.43	127.19 PK			25.74	6.19	31.93
2	*2470.48	115.29 AV			13.84	6.19	20.03
3	2368.71	60.92 PK	74	-13.08	-40.53	6.19	-34.34
4	2389.97	44.13 AV	54	-9.87	-57.32	6.19	-51.13
5	2483.95	73.49 PK	74	-0.51	-27.96	6.19	-21.77
6	2483.73	47.18 AV	54	-6.82	-54.27	6.19	-48.08

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

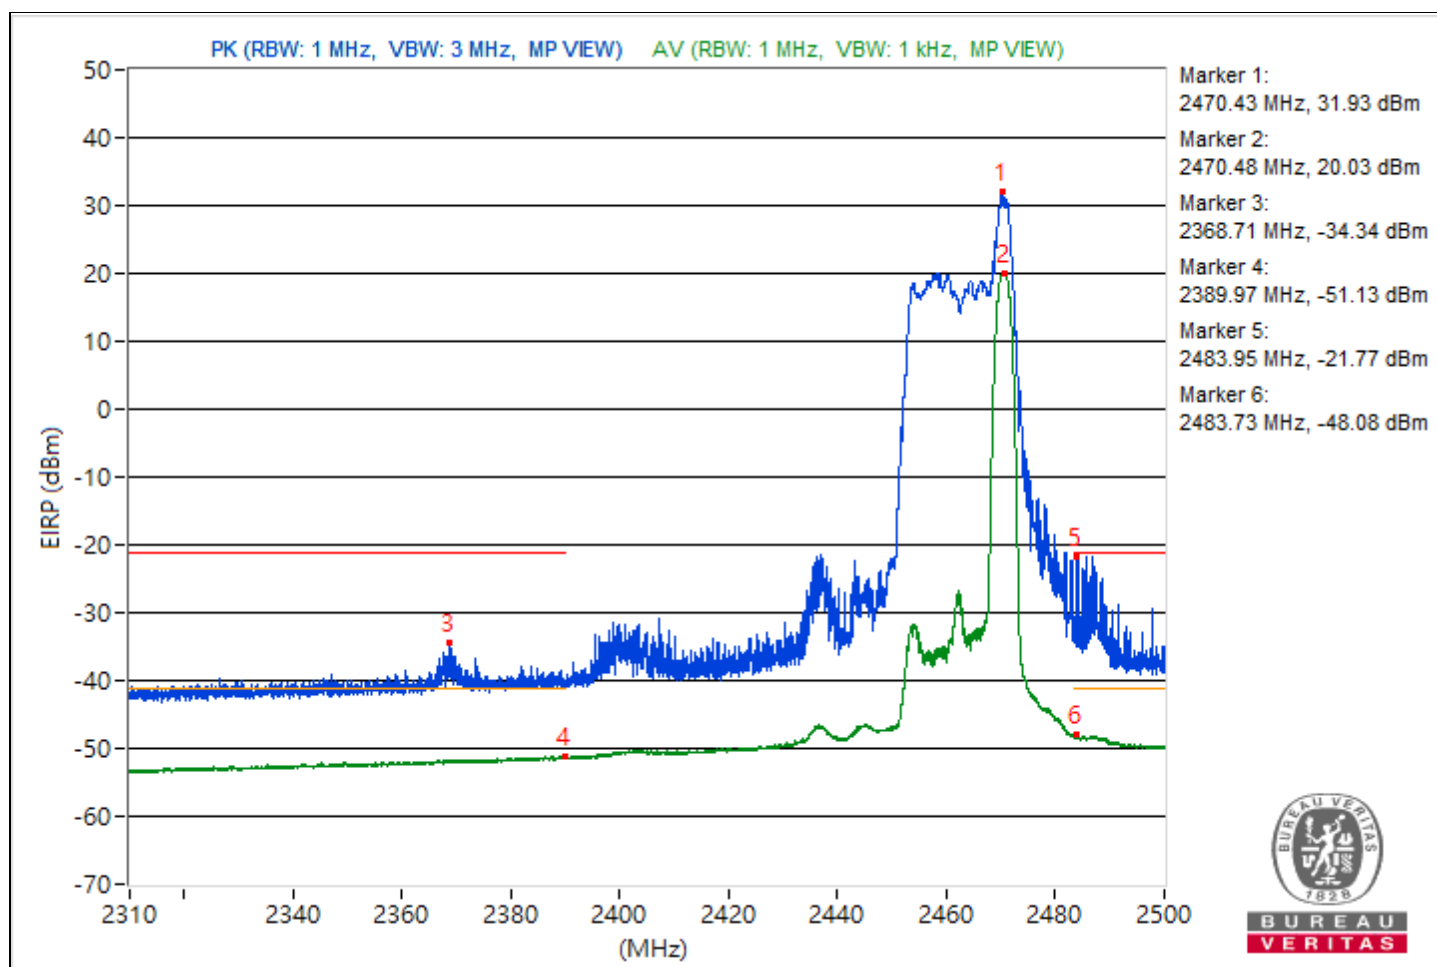


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.3	125.83 PK			24.38	6.19	30.57
2	*2475.61	114.12 AV			12.67	6.19	18.86
3	2373.7	58.06 PK	74	-15.94	-43.39	6.19	-37.2
4	2389.25	44.2 AV	54	-9.8	-57.25	6.19	-51.06
5	2483.8	72.8 PK	74	-1.2	-28.65	6.19	-22.46
6	2483.54	49.91 AV	54	-4.09	-51.54	6.19	-45.35

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

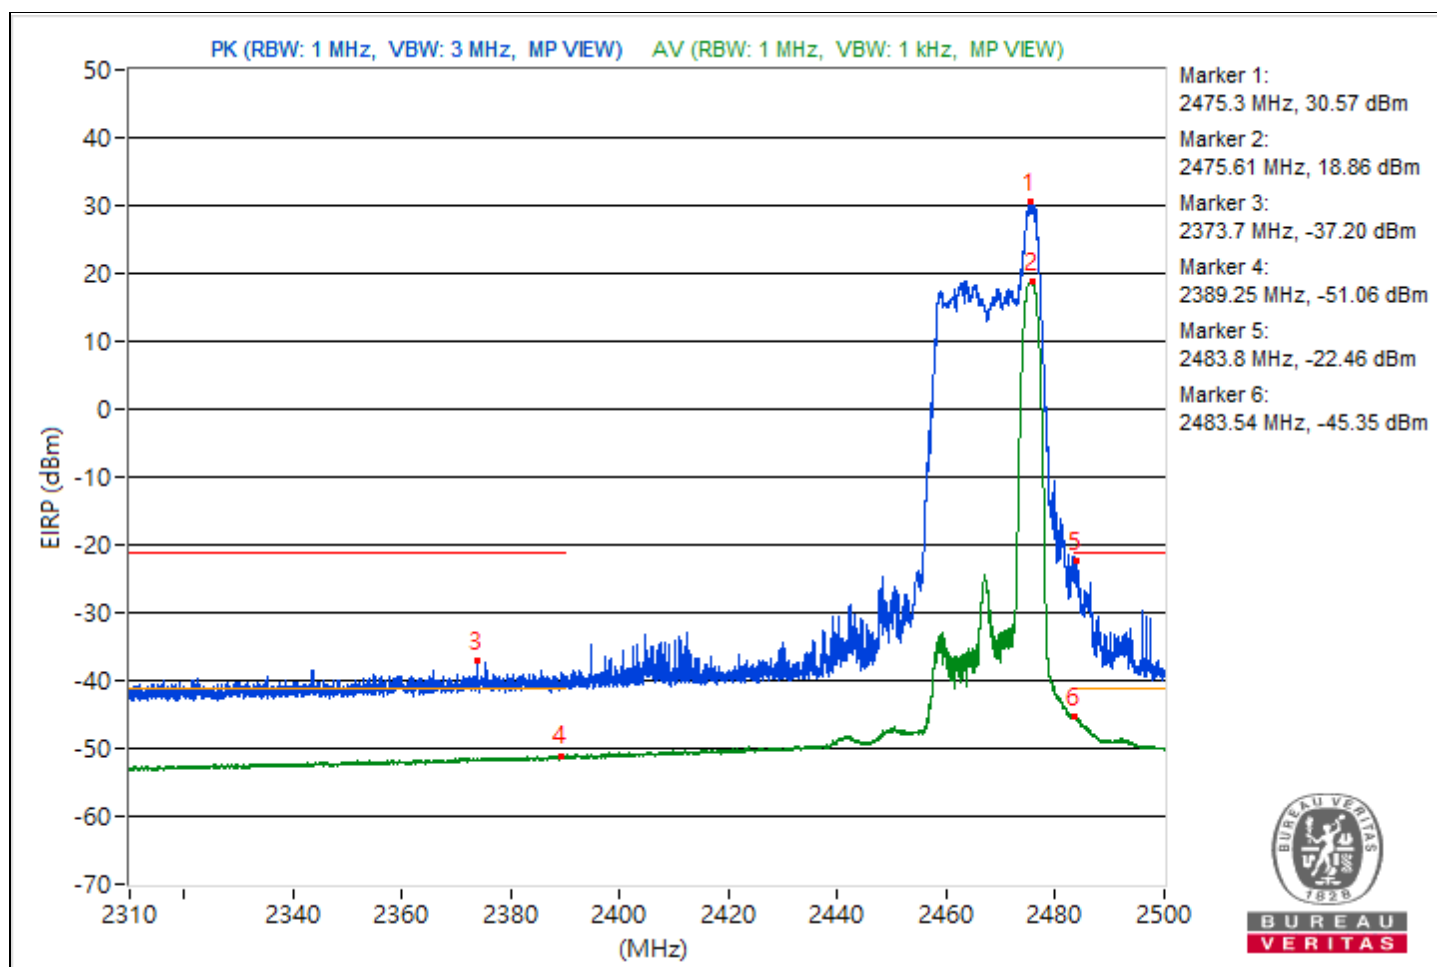

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		


Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	67.41 PK	74	-6.59	-34.04	6.19	-27.85
2	2483.5	53.11 AV	54	-0.89	-48.34	6.19	-42.15

Notes:


1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

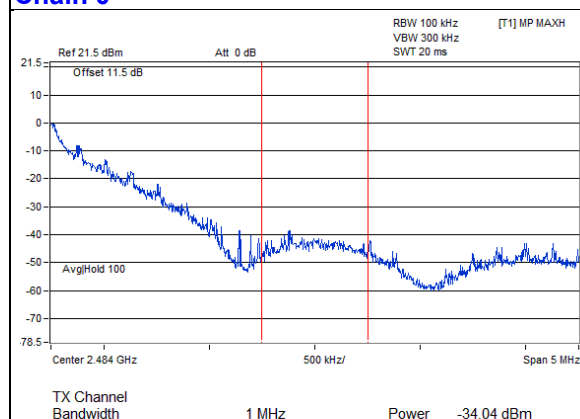

Peak

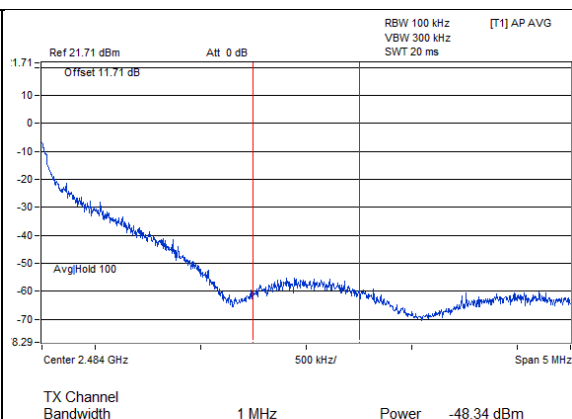

Average




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2405.93	124.4 PK			22.95	6.19	29.14
2	*2404.14	112.97 AV			11.52	6.19	17.71
3	2389.66	68.8 PK	74	-5.2	-32.65	6.19	-26.46
4	2389.82	48.39 AV	54	-5.61	-53.06	6.19	-46.87
5	2491.36	58.46 PK	74	-15.54	-42.99	6.19	-36.8
6	2488.89	44.39 AV	54	-9.61	-57.06	6.19	-50.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

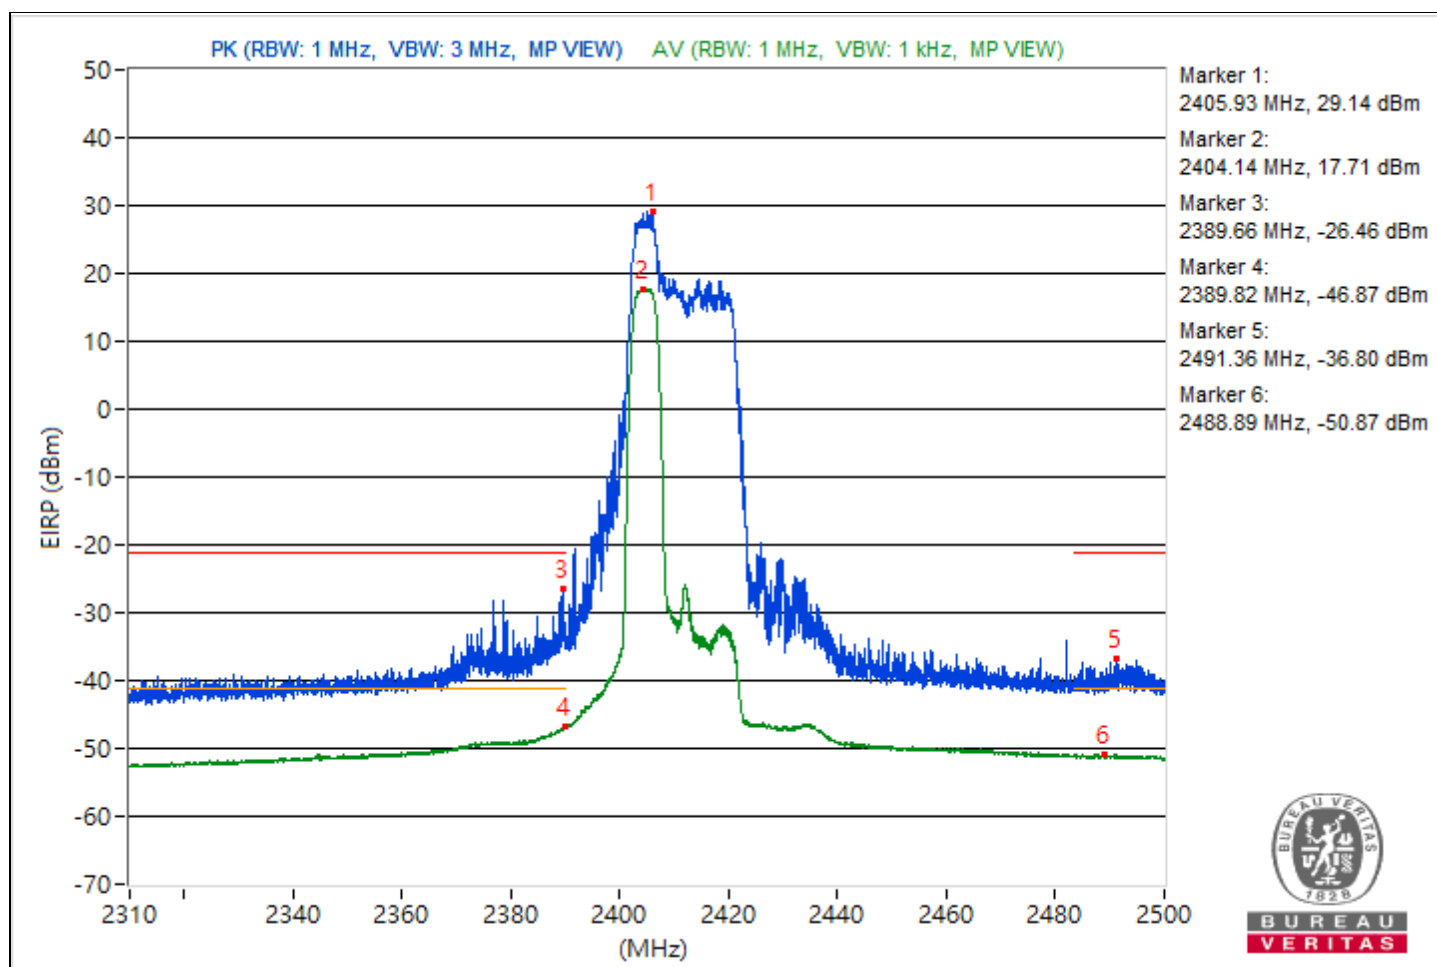


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2428.32	126.21 PK			24.76	6.19	30.95
2	*2429.11	115.88 AV			14.43	6.19	20.62
3	2389.92	68.43 PK	74	-5.57	-33.02	6.19	-26.83
4	2389.59	46.26 AV	54	-7.74	-55.19	6.19	-49
5	2483.85	67.94 PK	74	-6.06	-33.51	6.19	-27.32
6	2486.32	46.94 AV	54	-7.06	-54.51	6.19	-48.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

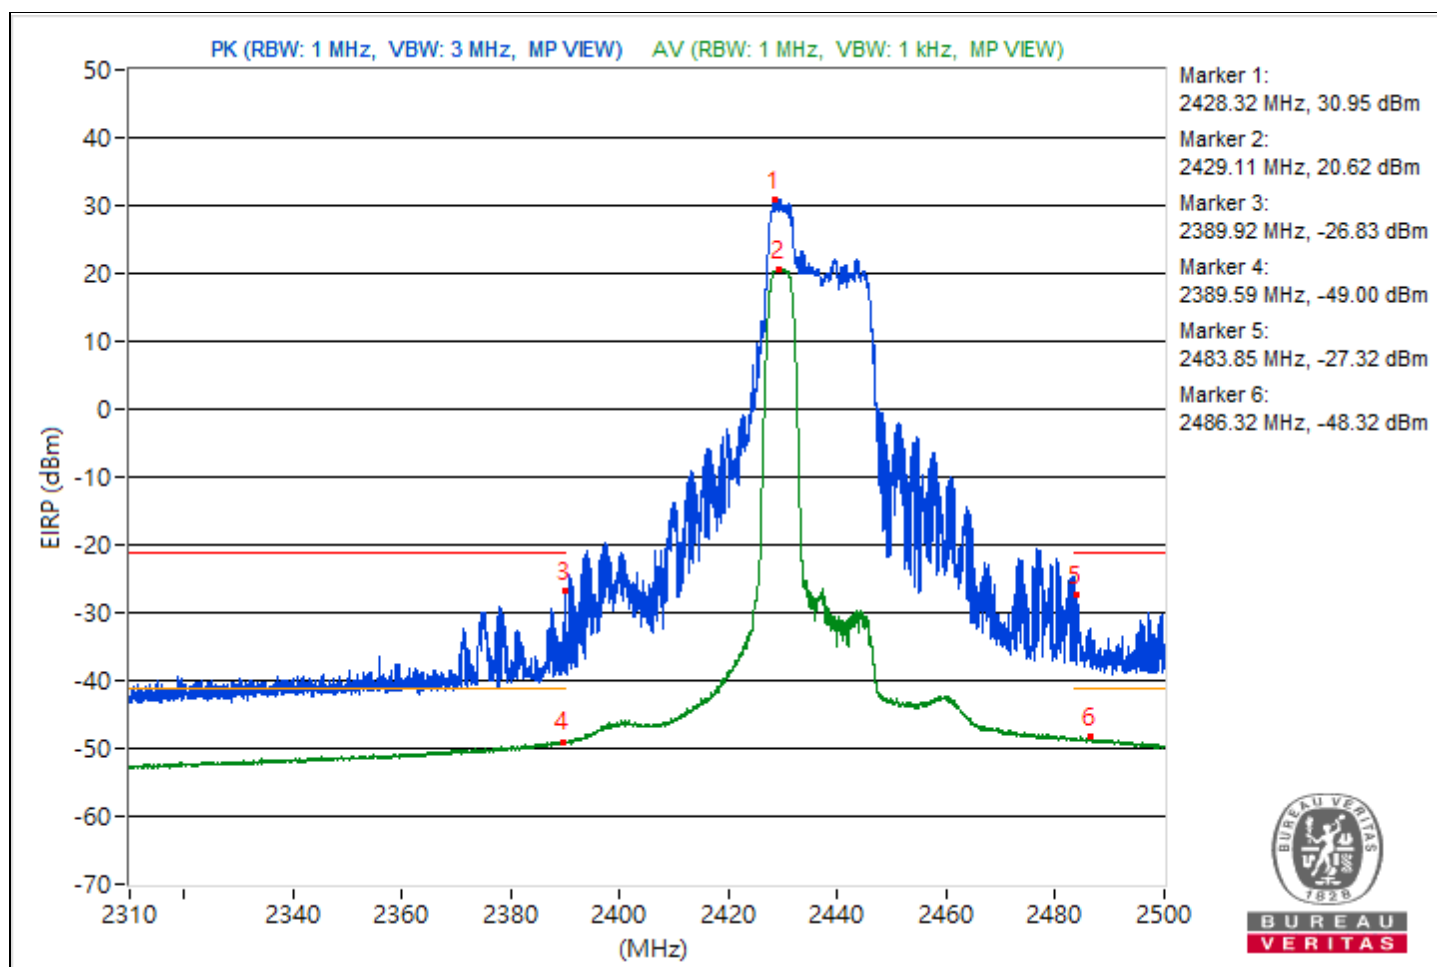


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2470.24	124.39 PK			22.94	6.19	29.13
2	*2469.08	113.22 AV			11.77	6.19	17.96
3	2383.22	61.68 PK	74	-12.32	-39.77	6.19	-33.58
4	2382.37	44.31 AV	54	-9.69	-57.14	6.19	-50.95
5	2485.56	66.63 PK	74	-7.37	-34.82	6.19	-28.63
6	2483.57	48.6 AV	54	-5.4	-52.85	6.19	-46.66

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

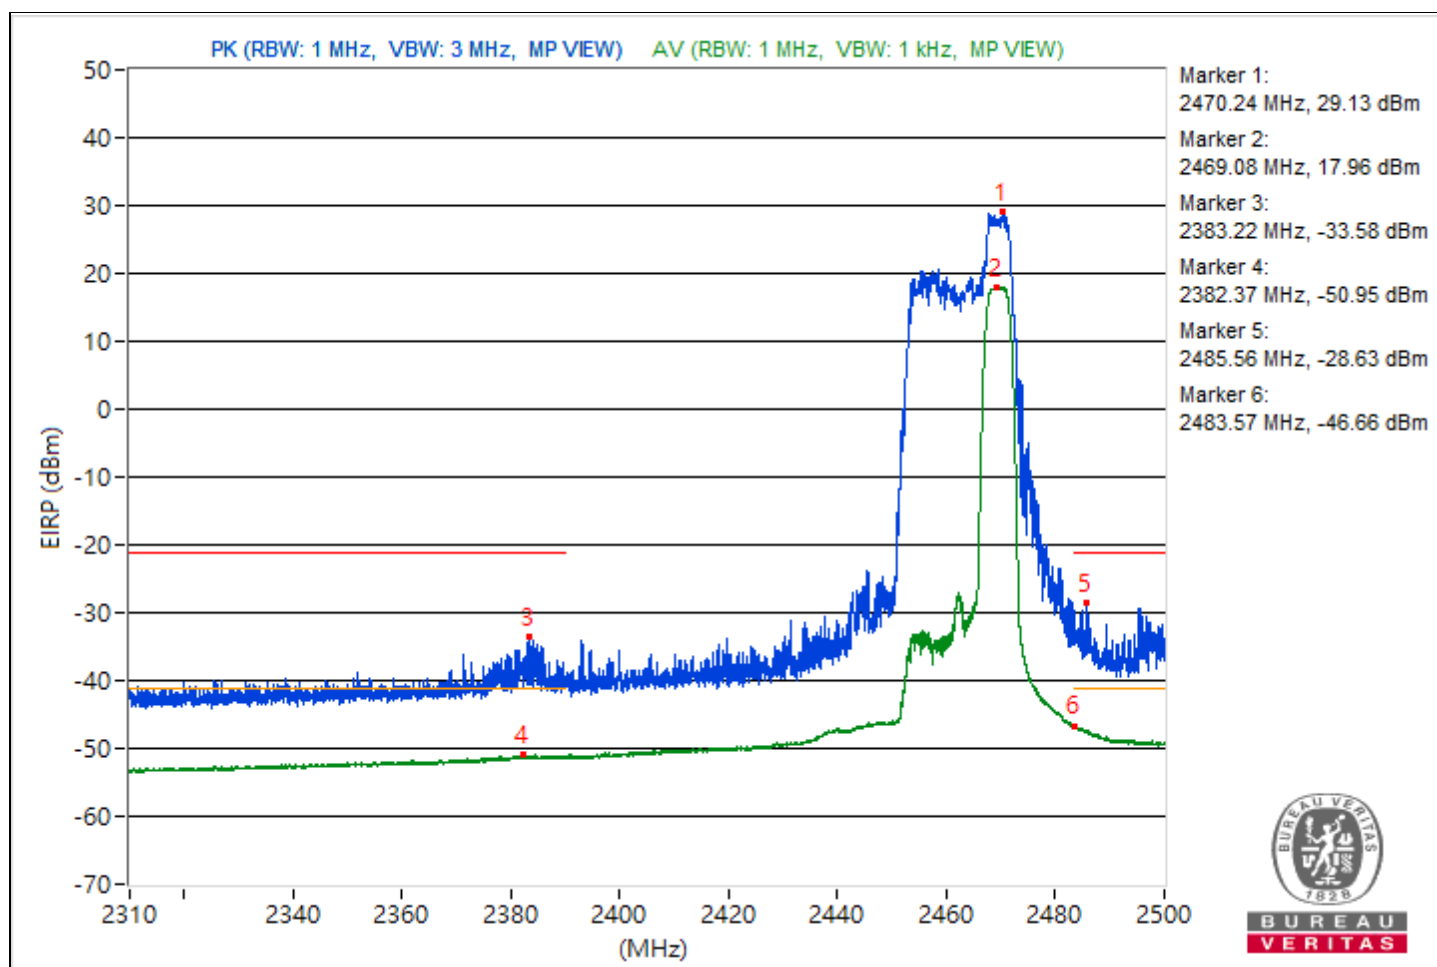


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2474.11	124.14 PK			22.69	6.19	28.88
2	*2473.9	111.28 AV			9.83	6.19	16.02
3	2388.18	60.69 PK	74	-13.31	-40.76	6.19	-34.57
4	2387.85	44.23 AV	54	-9.77	-57.22	6.19	-51.03
5	2483.61	73.43 PK	74	-0.57	-28.02	6.19	-21.83
6	2483.8	50.75 AV	54	-3.25	-50.7	6.19	-44.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

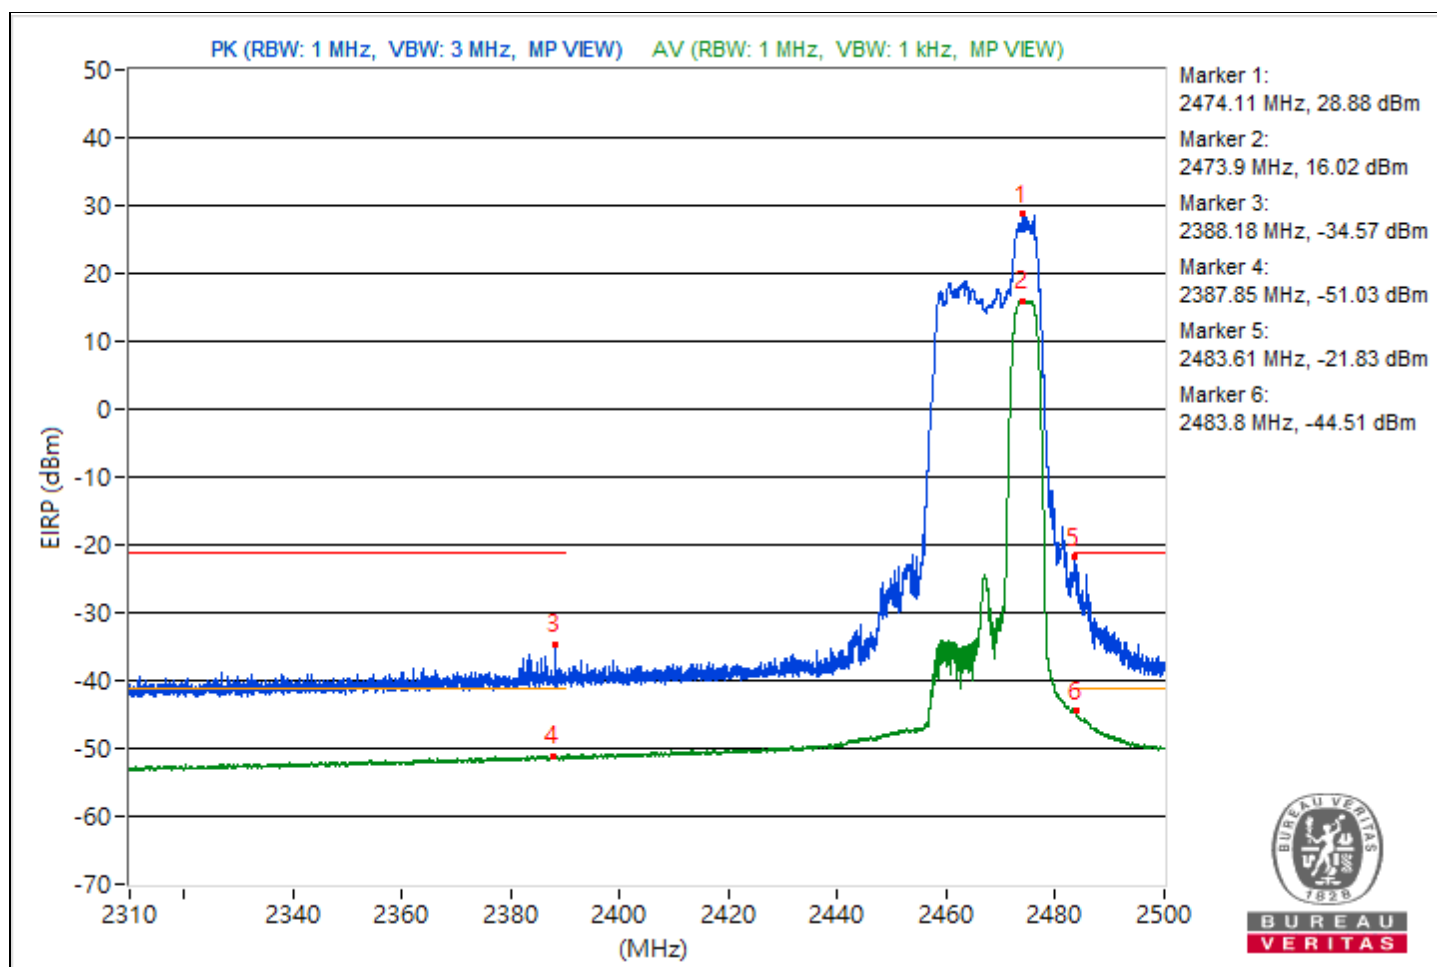

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		


Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	66.98 PK	74	-7.02	-34.47	6.19	-28.28
2	2483.5	53.31 AV	54	-0.69	-48.14	6.19	-41.95

Notes:

1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

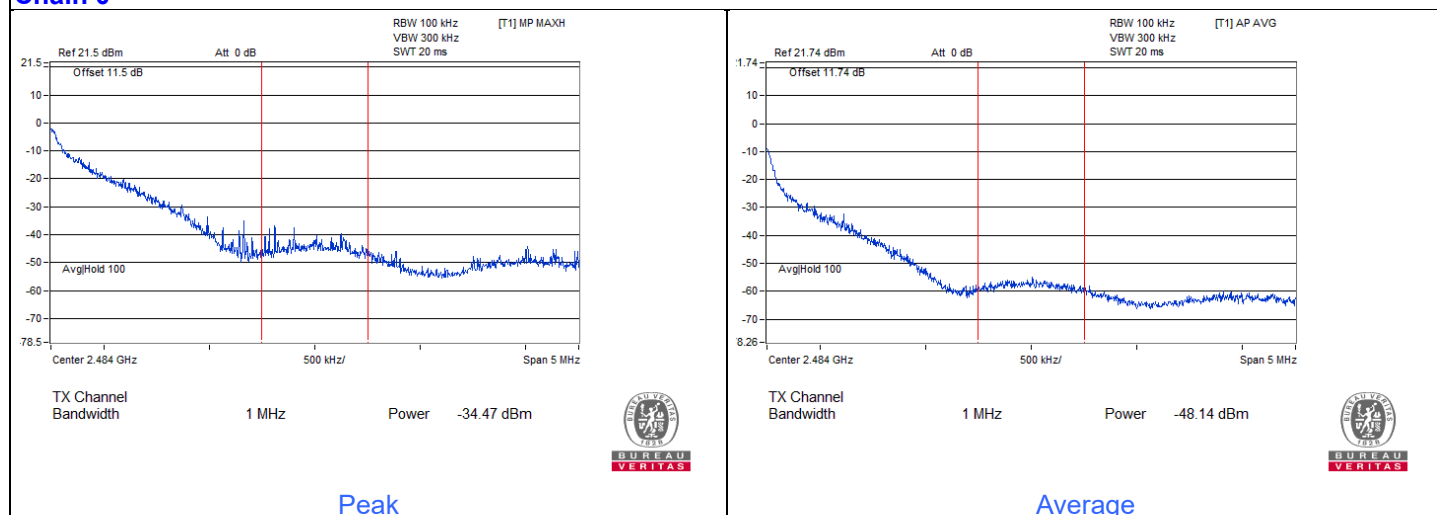


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2407.83	121.51 PK			20.06	6.19	26.25
2	*2405.05	109.78 AV			8.33	6.19	14.52
3	2389.7	66.75 PK	74	-7.25	-34.7	6.19	-28.51
4	2389.35	49.14 AV	54	-4.86	-52.31	6.19	-46.12
5	2486.25	57.86 PK	74	-16.14	-43.59	6.19	-37.4
6	2490.57	44.22 AV	54	-9.78	-57.23	6.19	-51.04

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

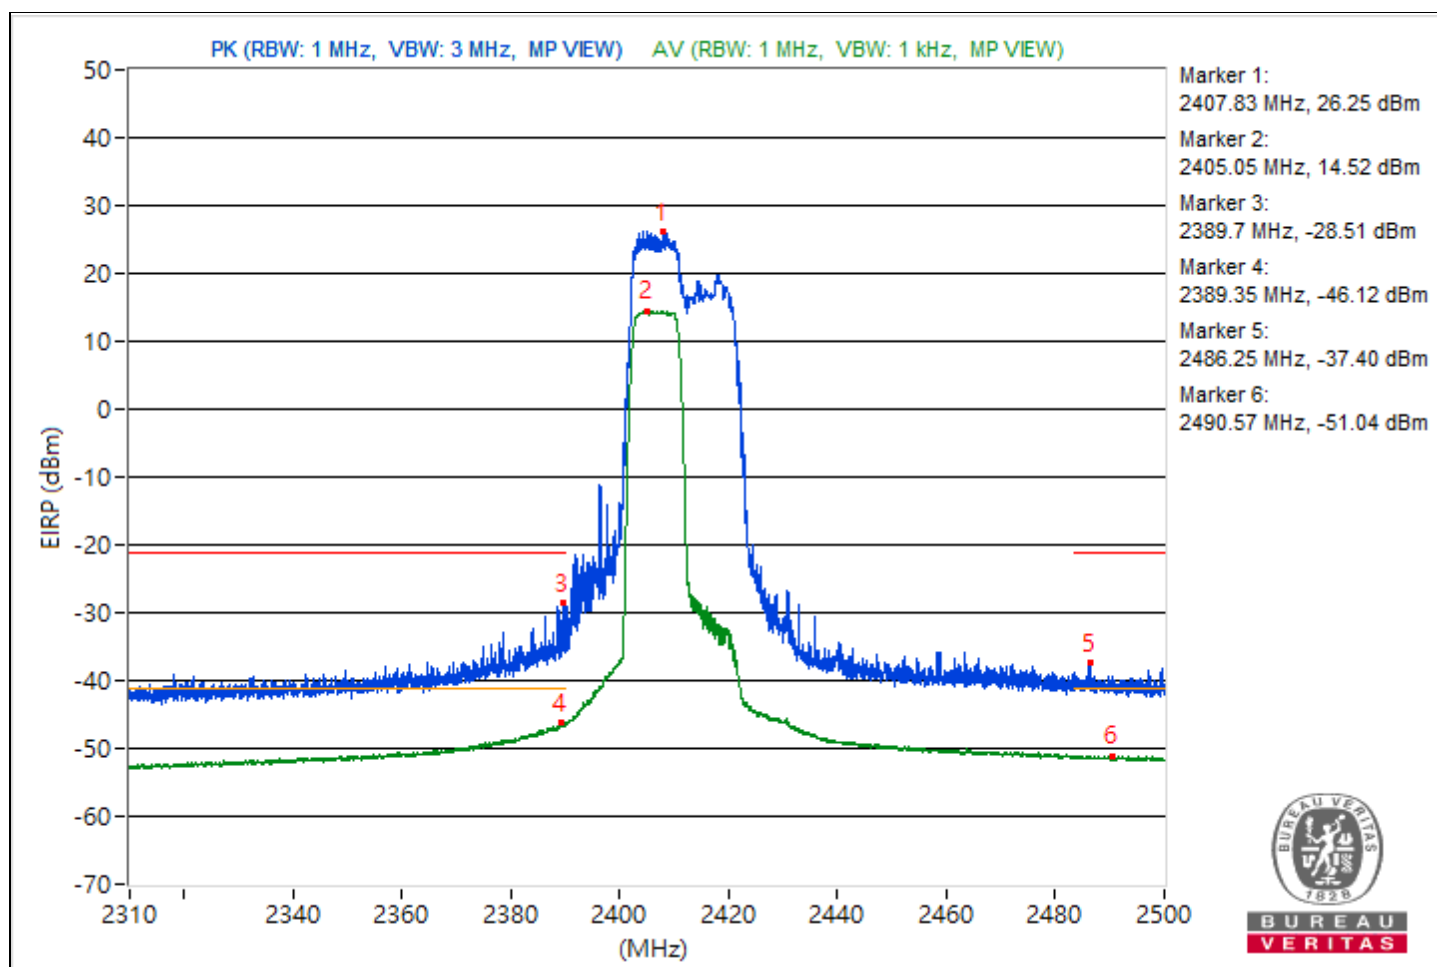


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2433.22	124.79 PK			23.34	6.19	29.53
2	*2431.81	112.65 AV			11.2	6.19	17.39
3	2388.18	64 PK	74	-10	-37.45	6.19	-31.26
4	2388.8	46.81 AV	54	-7.19	-54.64	6.19	-48.45
5	2483.61	64.03 PK	74	-9.97	-37.42	6.19	-31.23
6	2487.06	47.75 AV	54	-6.25	-53.7	6.19	-47.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

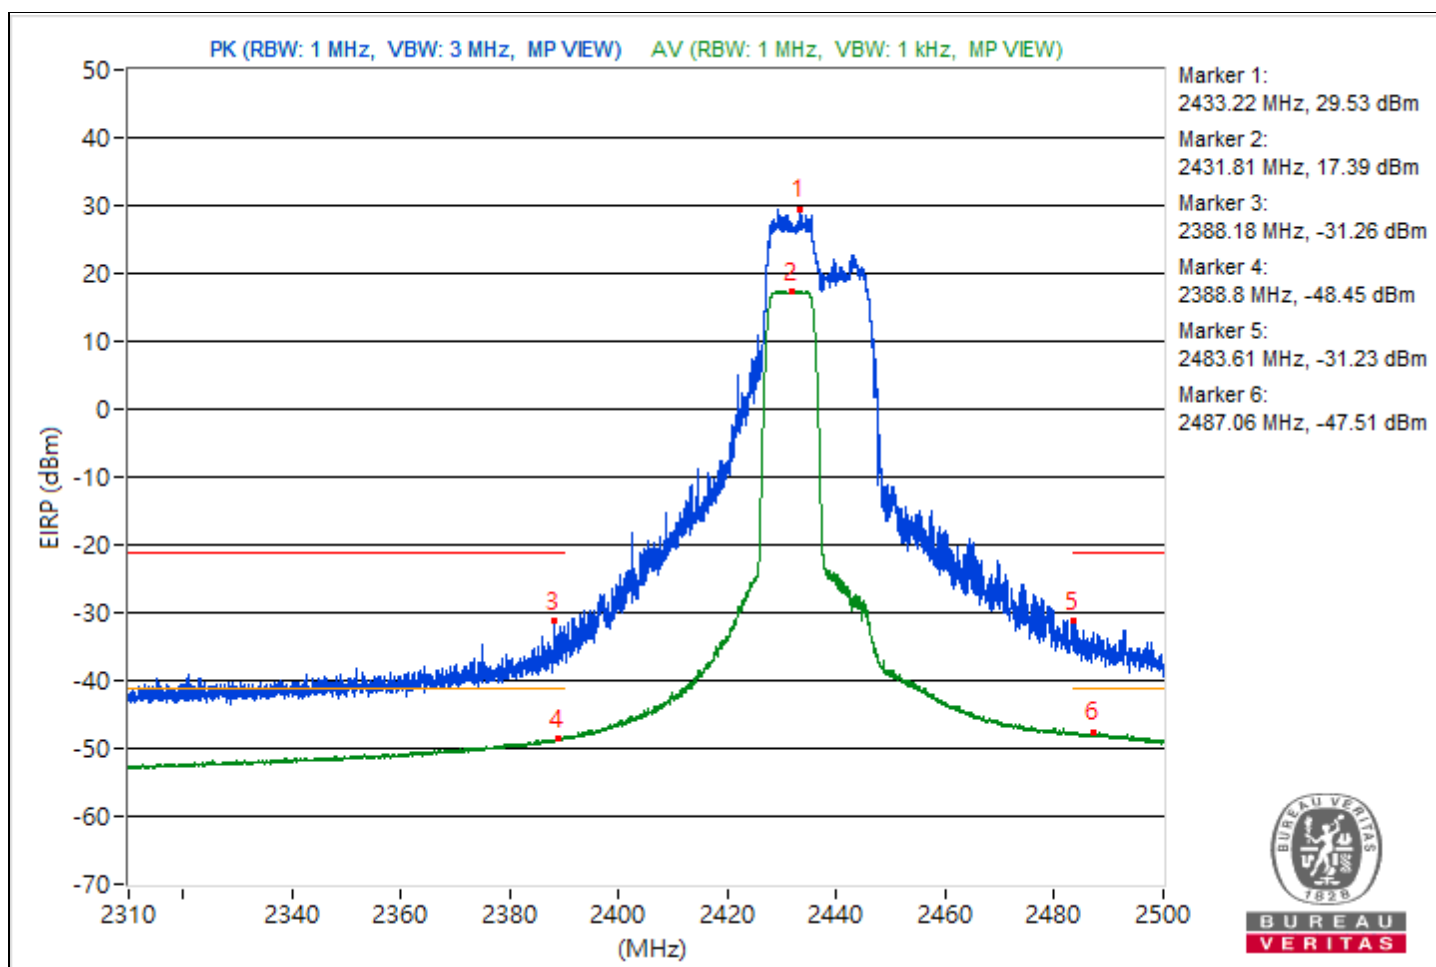


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2468.72	122.4 PK			20.95	6.19	27.14
2	*2466.35	110.17 AV			8.72	6.19	14.91
3	2354.1	56.99 PK	74	-17.01	-44.46	6.19	-38.27
4	2388.26	44.13 AV	54	-9.87	-57.32	6.19	-51.13
5	2483.57	63.34 PK	74	-10.66	-38.11	6.19	-31.92
6	2483.71	49.61 AV	54	-4.39	-51.84	6.19	-45.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

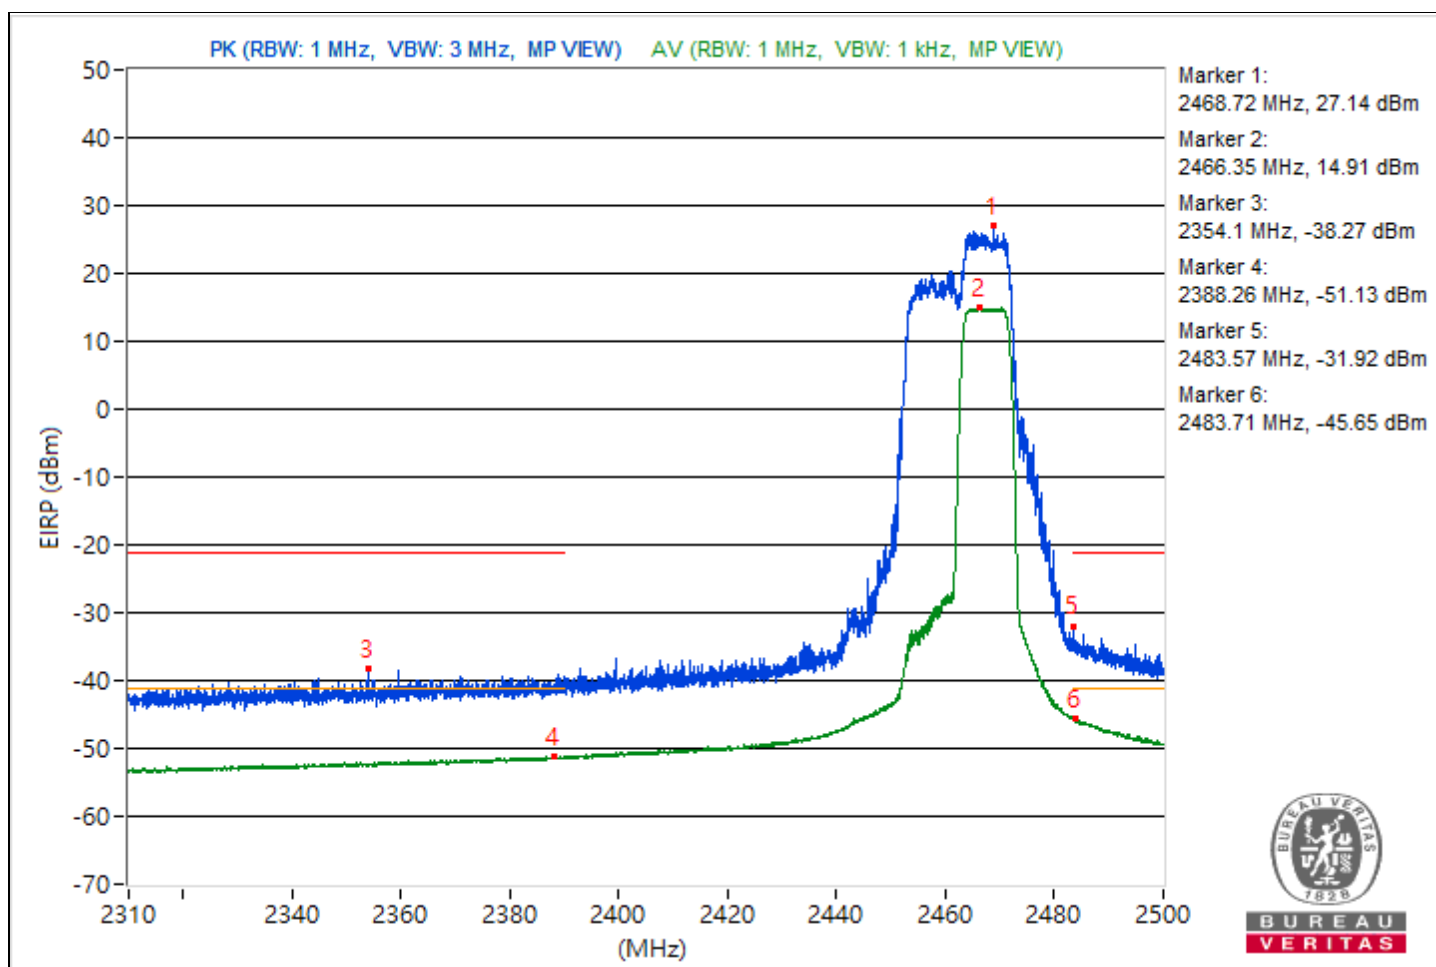


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.32	121.61 PK			20.16	6.19	26.35
2	*2470.15	109.11 AV			7.66	6.19	13.85
3	2380.3	57.13 PK	74	-16.87	-44.32	6.19	-38.13
4	2389.23	44.45 AV	54	-9.55	-57	6.19	-50.81
5	2483.64	72.03 PK	74	-1.97	-29.42	6.19	-23.23
6	2483.59	52.15 AV	54	-1.85	-49.3	6.19	-43.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

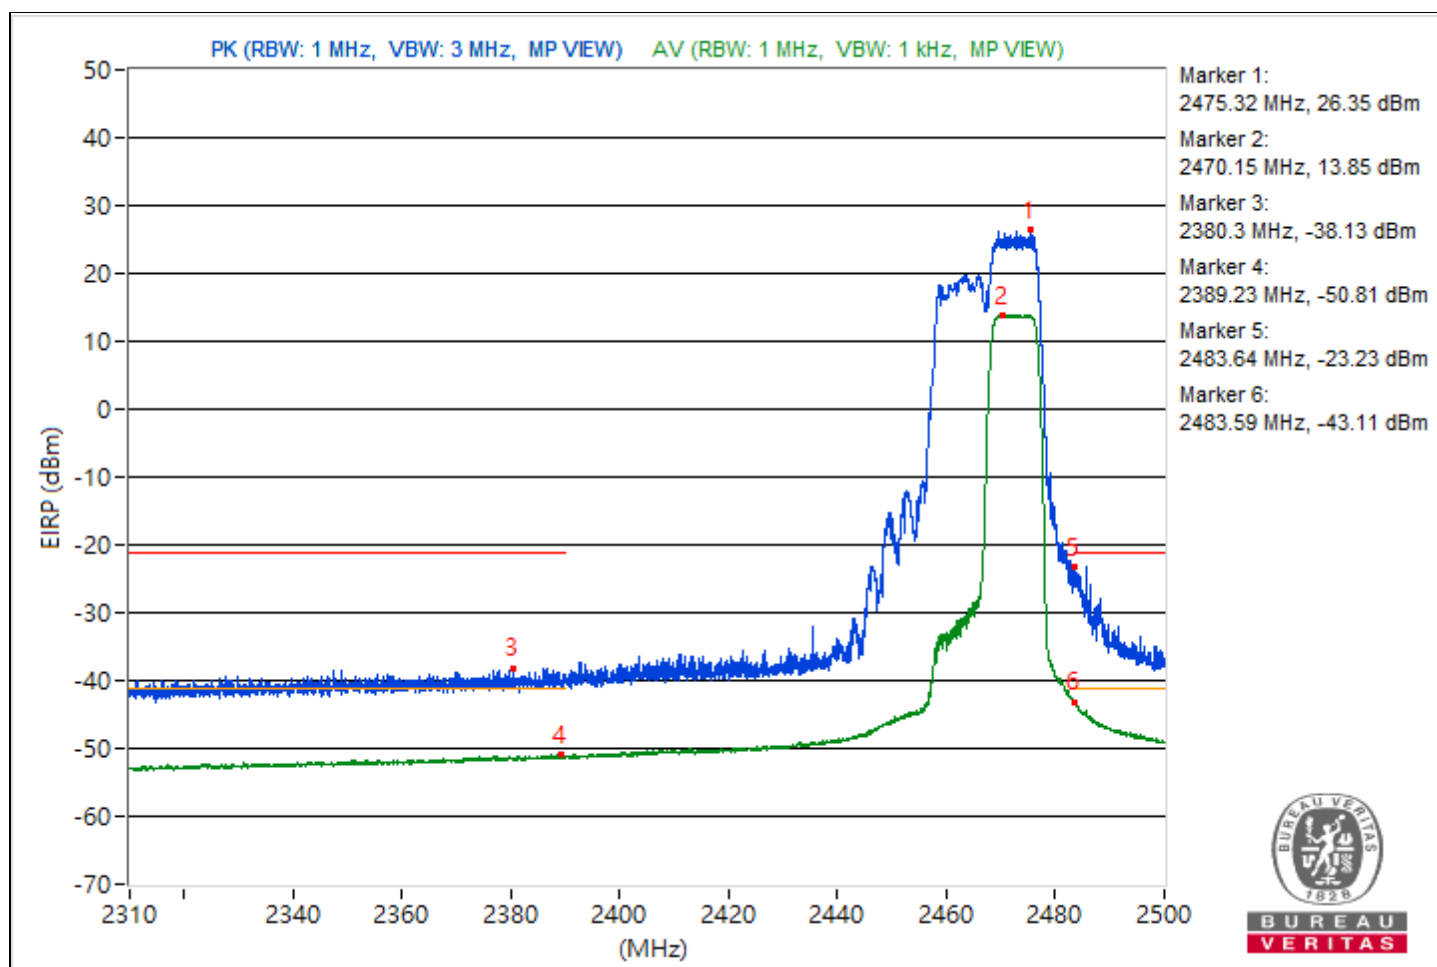

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		


Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	64.62 PK	74	-9.38	-36.83	6.19	-30.64
2	2483.5	52.06AV	54	-1.94	-49.39	6.19	-43.2

Notes:


1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

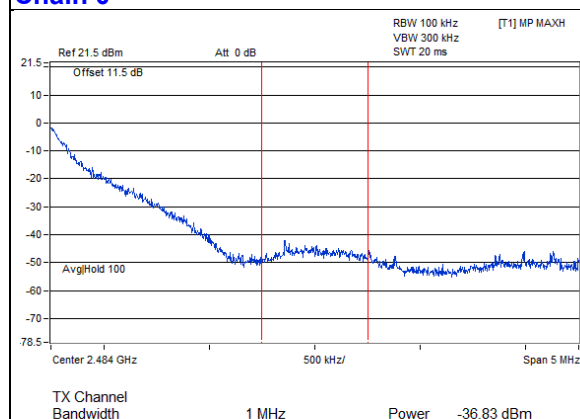

Peak

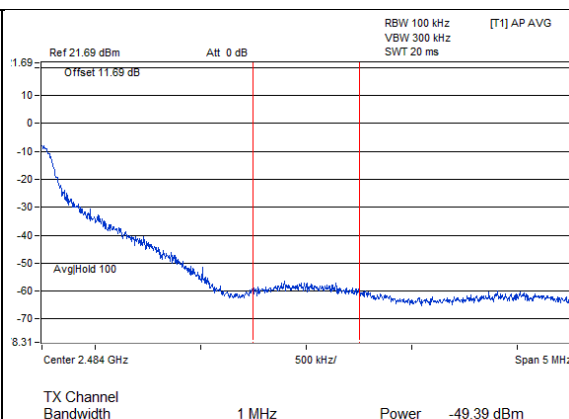

Average




RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2409.23	123.64 PK			22.19	6.19	28.38
2	*2405.88	110.99 AV			9.54	6.19	15.73
3	2388.76	61.09 PK	74	-12.91	-40.36	6.19	-34.17
4	2389.82	48.05 AV	54	-5.95	-53.4	6.19	-47.21
5	2484.16	56.92 PK	74	-17.08	-44.53	6.19	-38.34
6	2485.3	44.22 AV	54	-9.78	-57.23	6.19	-51.04

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

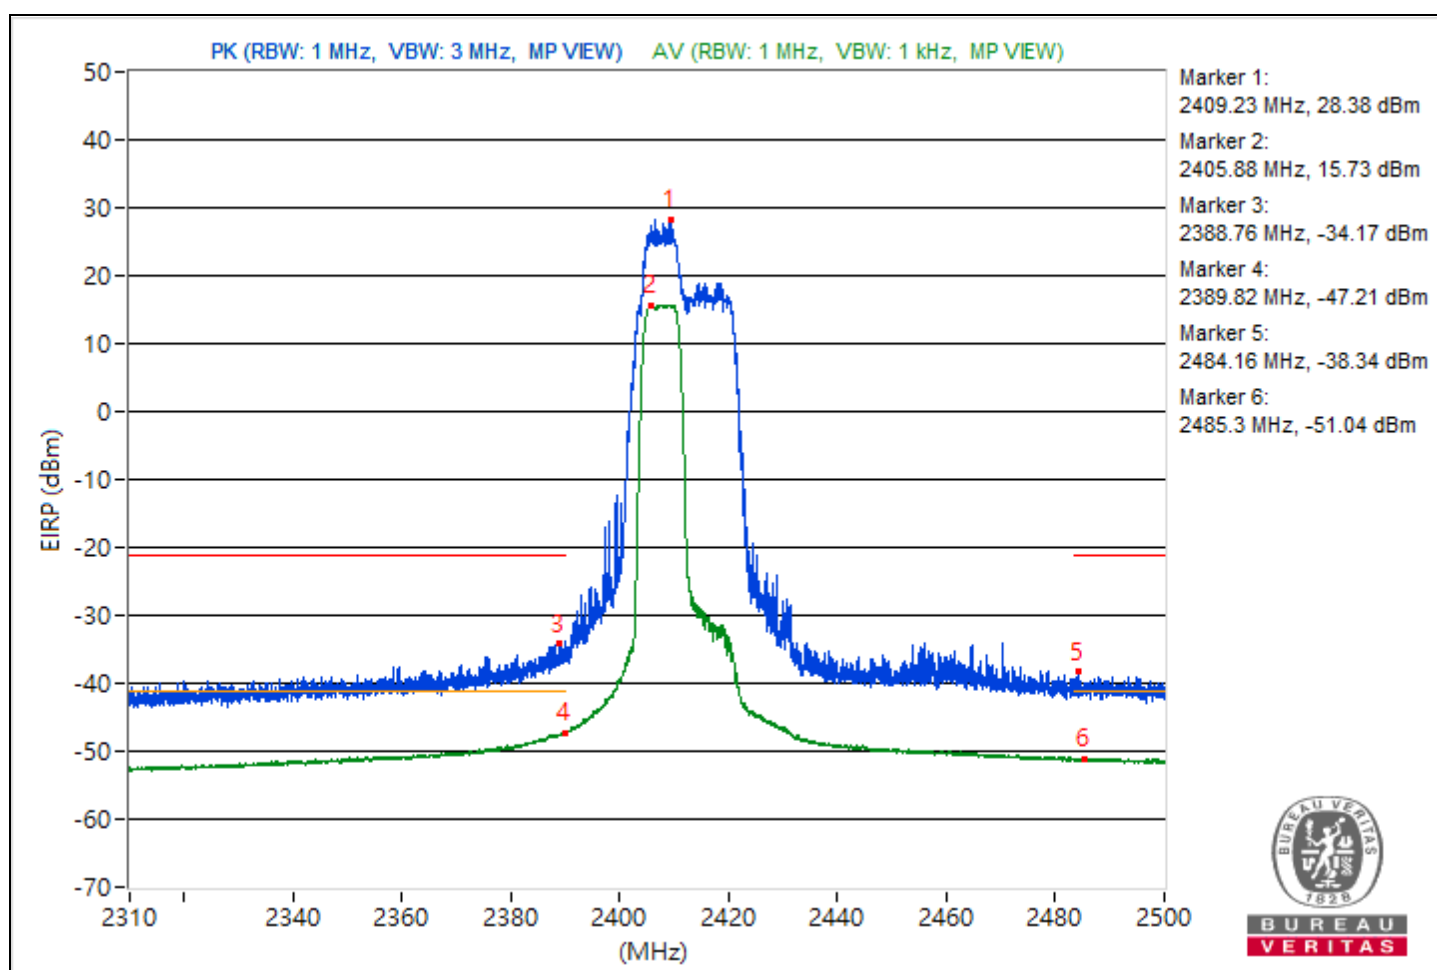


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2432.81	126.29 PK			24.84	6.19	31.03
2	*2433.74	114.03 AV			12.58	6.19	18.77
3	2389.78	61.85 PK	74	-12.15	-39.6	6.19	-33.41
4	2388.99	46.69 AV	54	-7.31	-54.76	6.19	-48.57
5	2484.7	63.92 PK	74	-10.08	-37.53	6.19	-31.34
6	2484.44	47.91 AV	54	-6.09	-53.54	6.19	-47.35

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

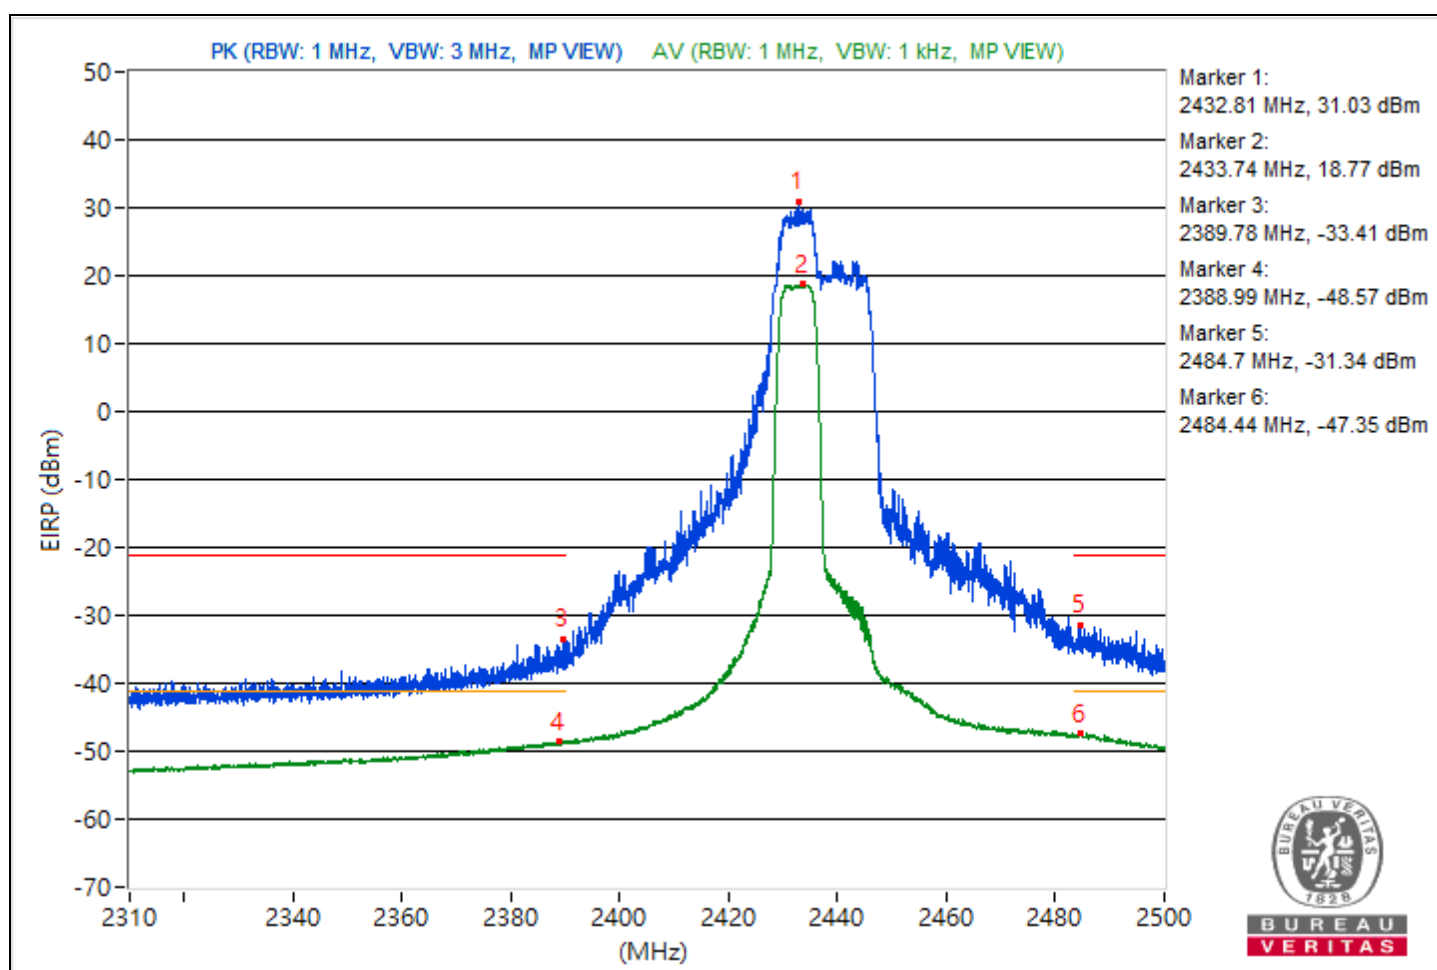


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2464.37	123.78 PK			22.33	6.19	28.52
2	*2465.49	111.35 AV			9.9	6.19	16.09
3	2380.54	56.15 PK	74	-17.85	-45.3	6.19	-39.11
4	2388.26	43.99 AV	54	-10.01	-57.46	6.19	-51.27
5	2486.77	62.37 PK	74	-11.63	-39.08	6.19	-32.89
6	2483.52	48.7 AV	54	-5.3	-52.75	6.19	-46.56

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

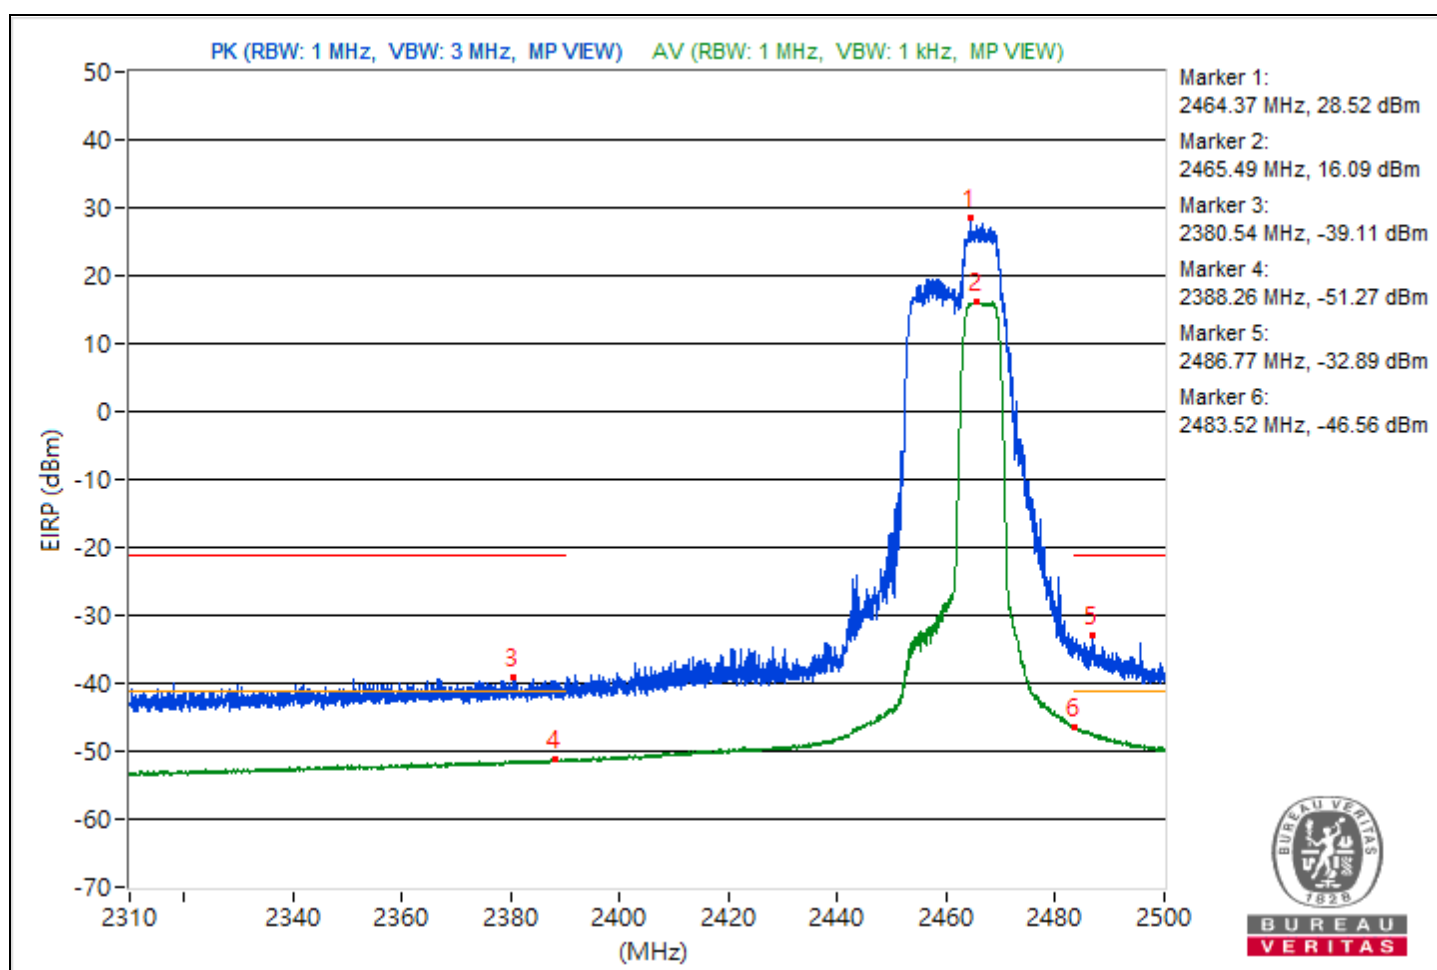


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2473.68	123.07 PK			21.62	6.19	27.81
2	*2469.65	110.4 AV			8.95	6.19	15.14
3	2379.54	57.39 PK	74	-16.61	-44.06	6.19	-37.87
4	2388.92	44.14 AV	54	-9.86	-57.31	6.19	-51.12
5	2483.73	71.74 PK	74	-2.26	-29.71	6.19	-23.52
6	2483.66	50.34 AV	54	-3.66	-51.11	6.19	-44.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

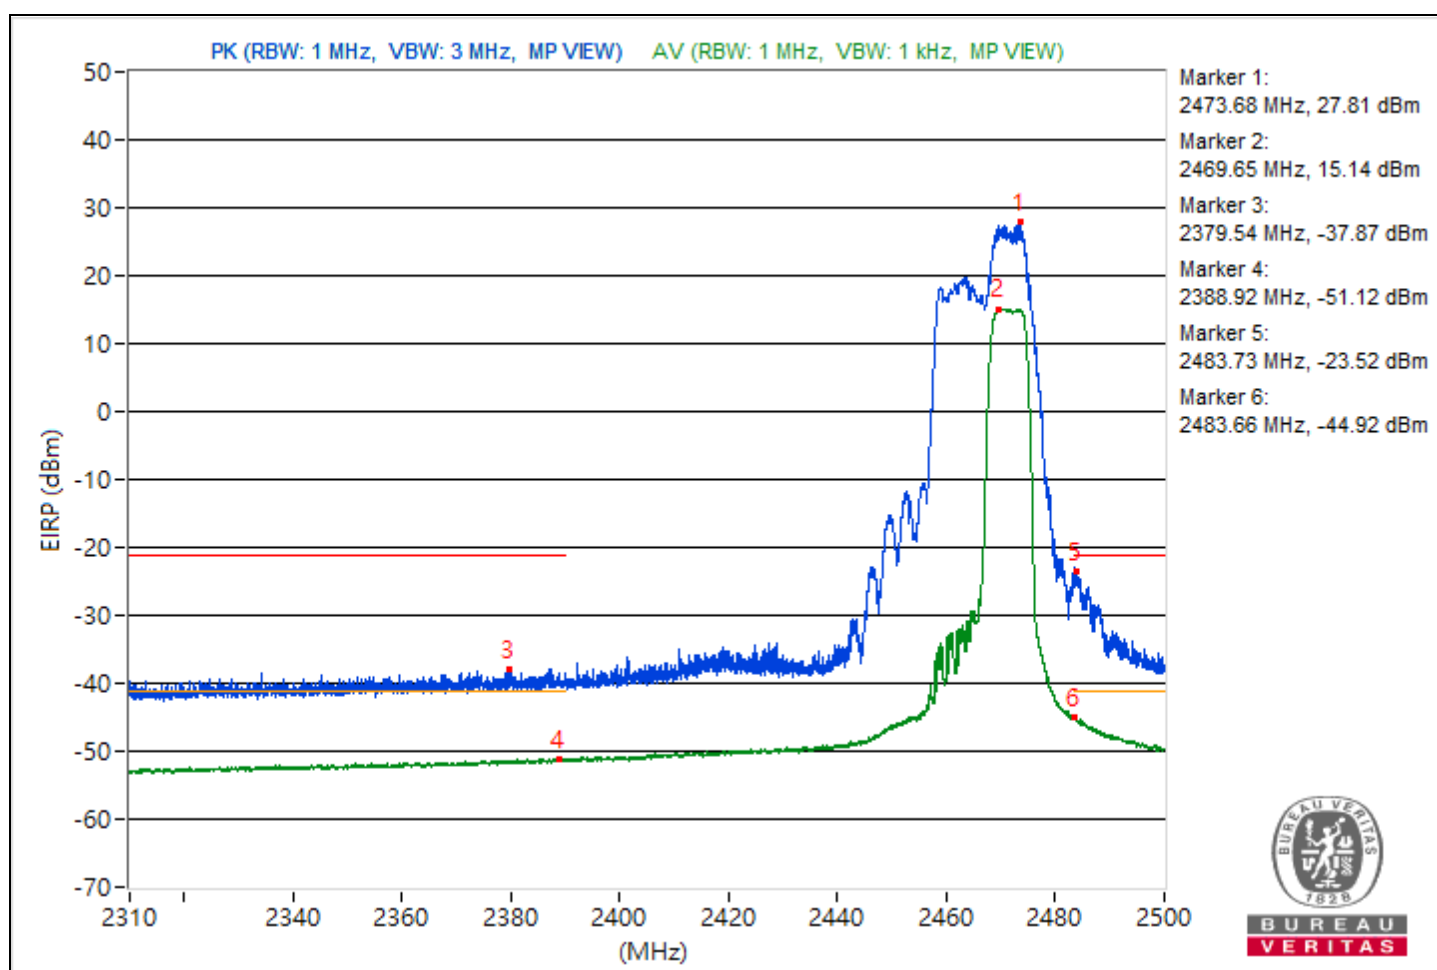


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.87	120.6 PK			19.15	6.19	25.34
2	*2476.65	107.93 AV			6.48	6.19	12.67
3	2378.04	55.84 PK	74	-18.16	-45.61	6.19	-39.42
4	2384.72	43.18 AV	54	-10.82	-58.27	6.19	-52.08
5	2483.68	72.38 PK	74	-1.62	-29.07	6.19	-22.88
6	2483.52	52.24 AV	54	-1.76	-49.21	6.19	-43.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

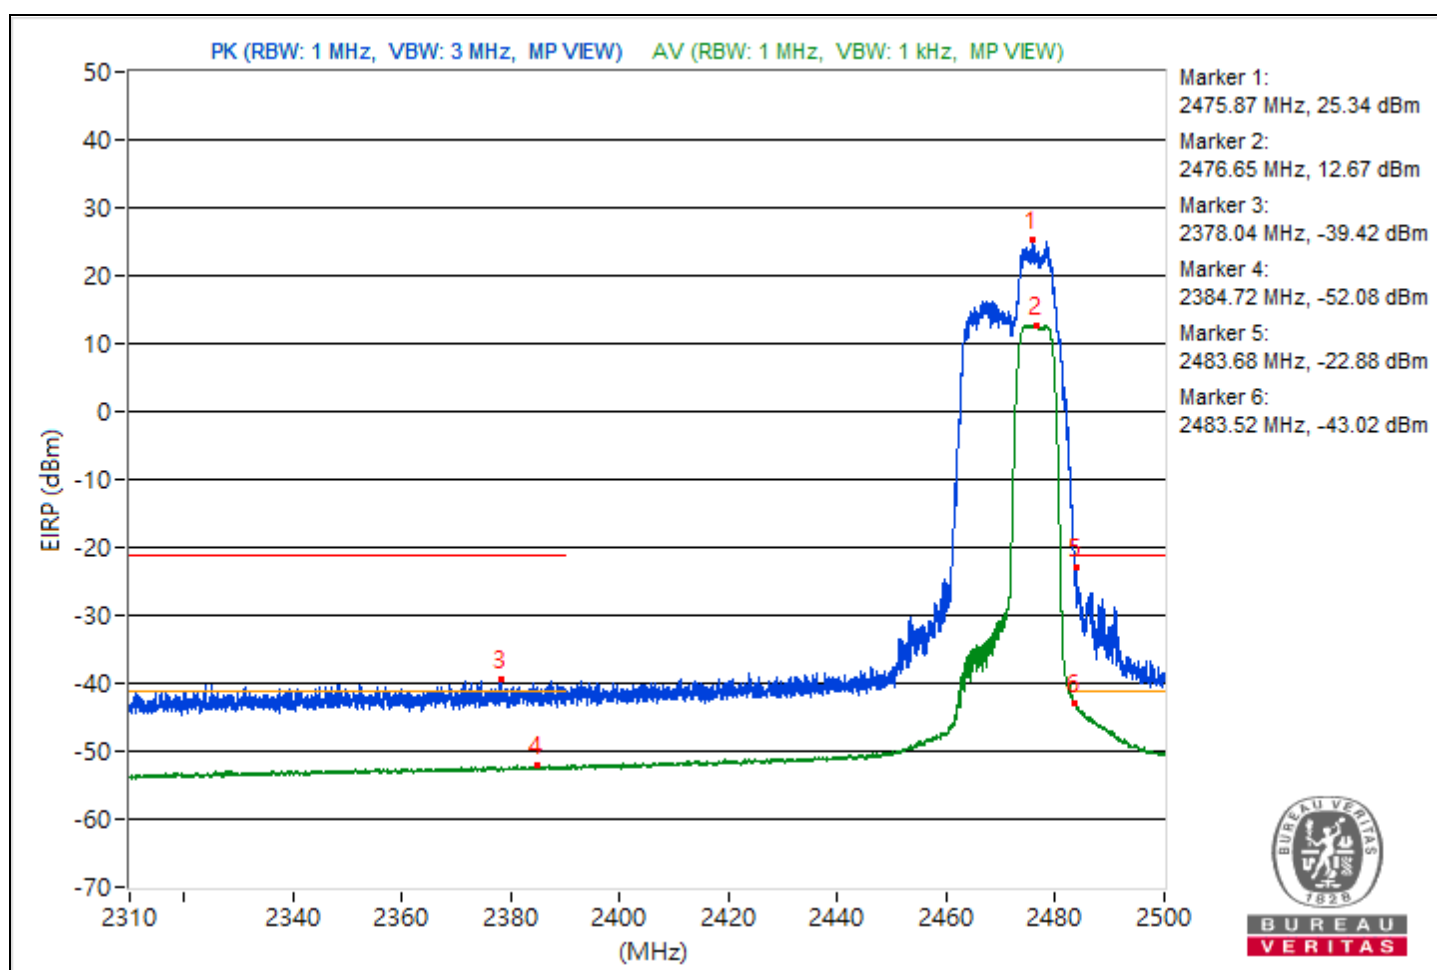


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2410.3	122.05 PK			20.6	6.19	26.79
2	*2410.41	109.55 AV			8.1	6.19	14.29
3	2389.89	70.47 PK	74	-3.53	-30.98	6.19	-24.79
4	2389.68	48.97 AV	54	-5.03	-52.48	6.19	-46.29
5	2484.16	57.16 PK	74	-16.84	-44.29	6.19	-38.1
6	2485.32	44.32 AV	54	-9.68	-57.13	6.19	-50.94

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

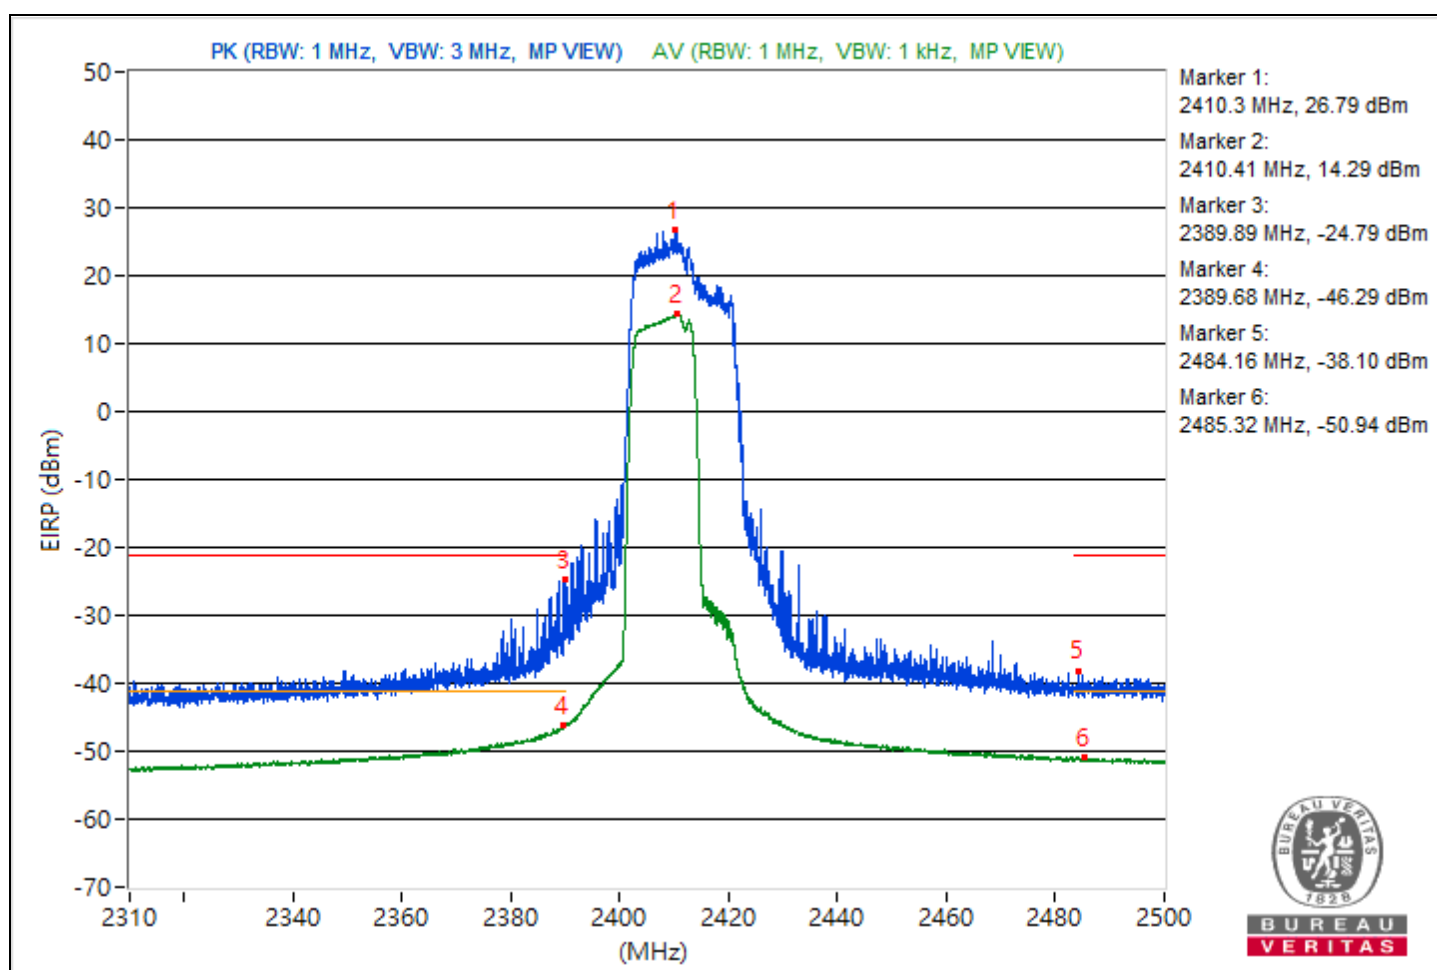


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2435.4	124.87 PK			23.42	6.19	29.61
2	*2435.09	112.44 AV			10.99	6.19	17.18
3	2383.51	66.77 PK	74	-7.23	-34.68	6.19	-28.49
4	2389.92	47.79 AV	54	-6.21	-53.66	6.19	-47.47
5	2487.18	63.75 PK	74	-10.25	-37.7	6.19	-31.51
6	2484.51	48.15 AV	54	-5.85	-53.3	6.19	-47.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

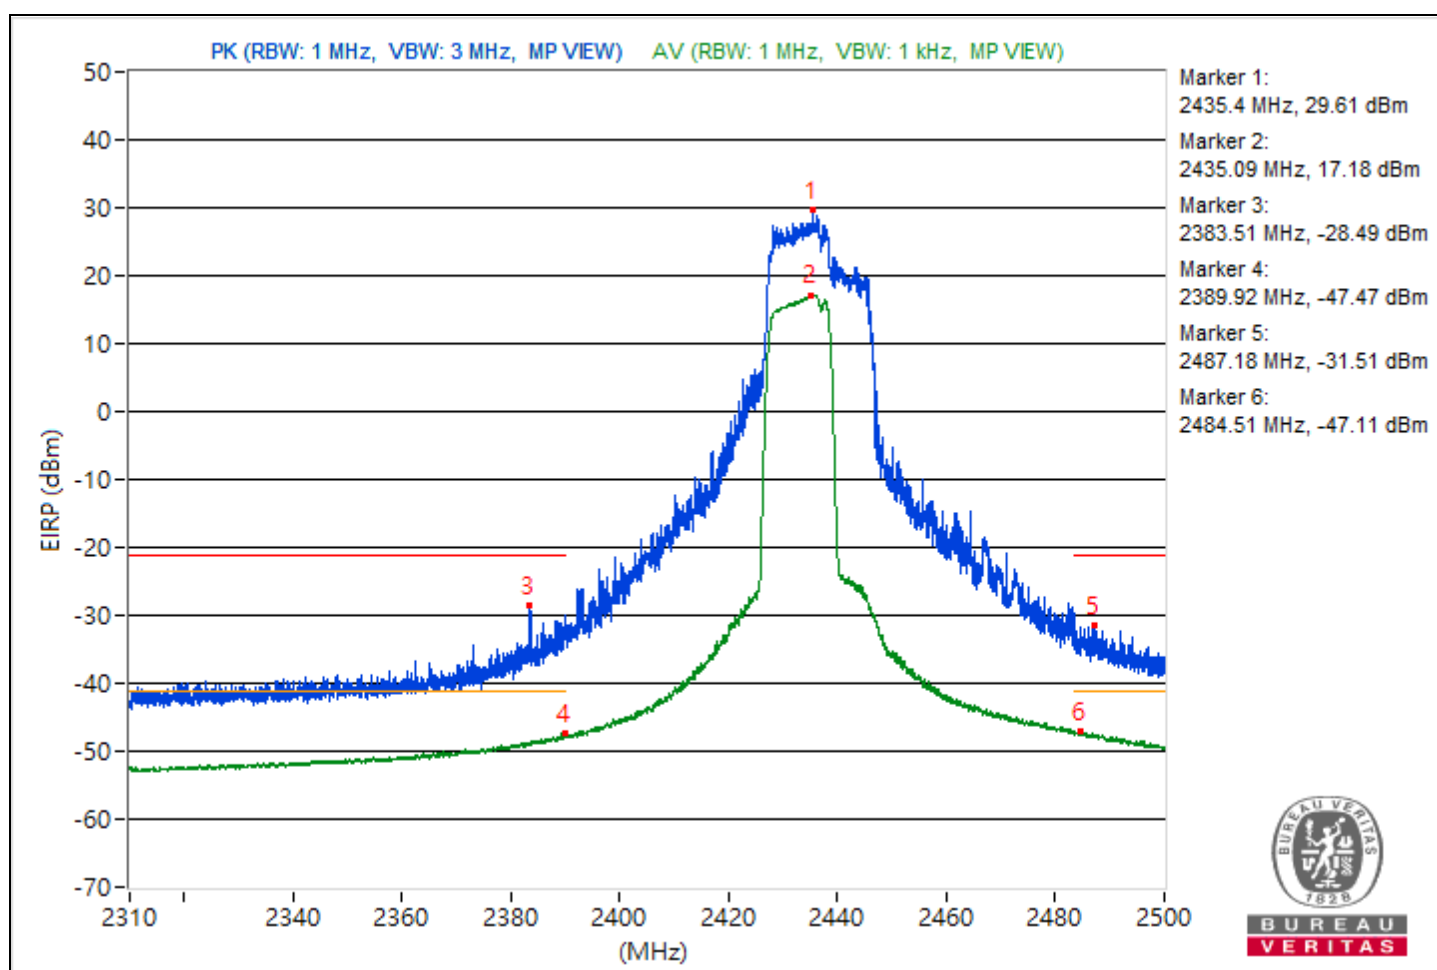


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2466.23	122.09 PK			20.64	6.19	26.83
2	*2463.52	110.1 AV			8.65	6.19	14.84
3	2388.09	56.6 PK	74	-17.4	-44.85	6.19	-38.66
4	2389.56	44.23 AV	54	-9.77	-57.22	6.19	-51.03
5	2494.01	61.83 PK	74	-12.17	-39.62	6.19	-33.43
6	2483.66	49.65 AV	54	-4.35	-51.8	6.19	-45.61

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

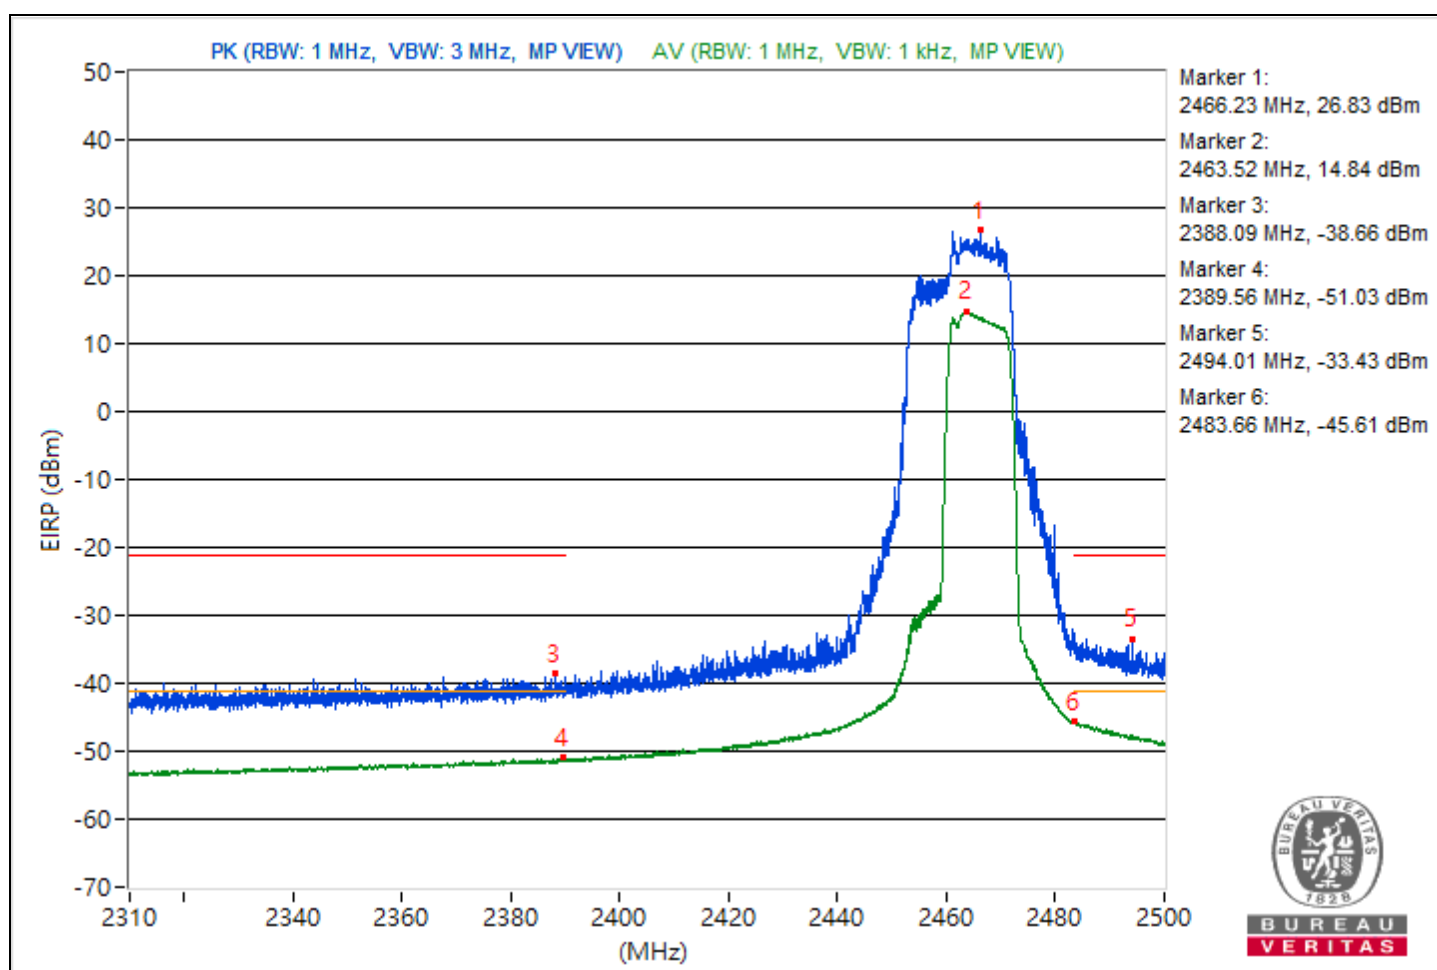


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2469.91	121.43 PK			19.98	6.19	26.17
2	*2468.41	109.12 AV			7.67	6.19	13.86
3	2332.47	56.44 PK	74	-17.56	-45.01	6.19	-38.82
4	2389.7	44.25 AV	54	-9.75	-57.2	6.19	-51.01
5	2483.76	71.83 PK	74	-2.17	-29.62	6.19	-23.43
6	2483.52	52.68 AV	54	-1.32	-48.77	6.19	-42.58

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

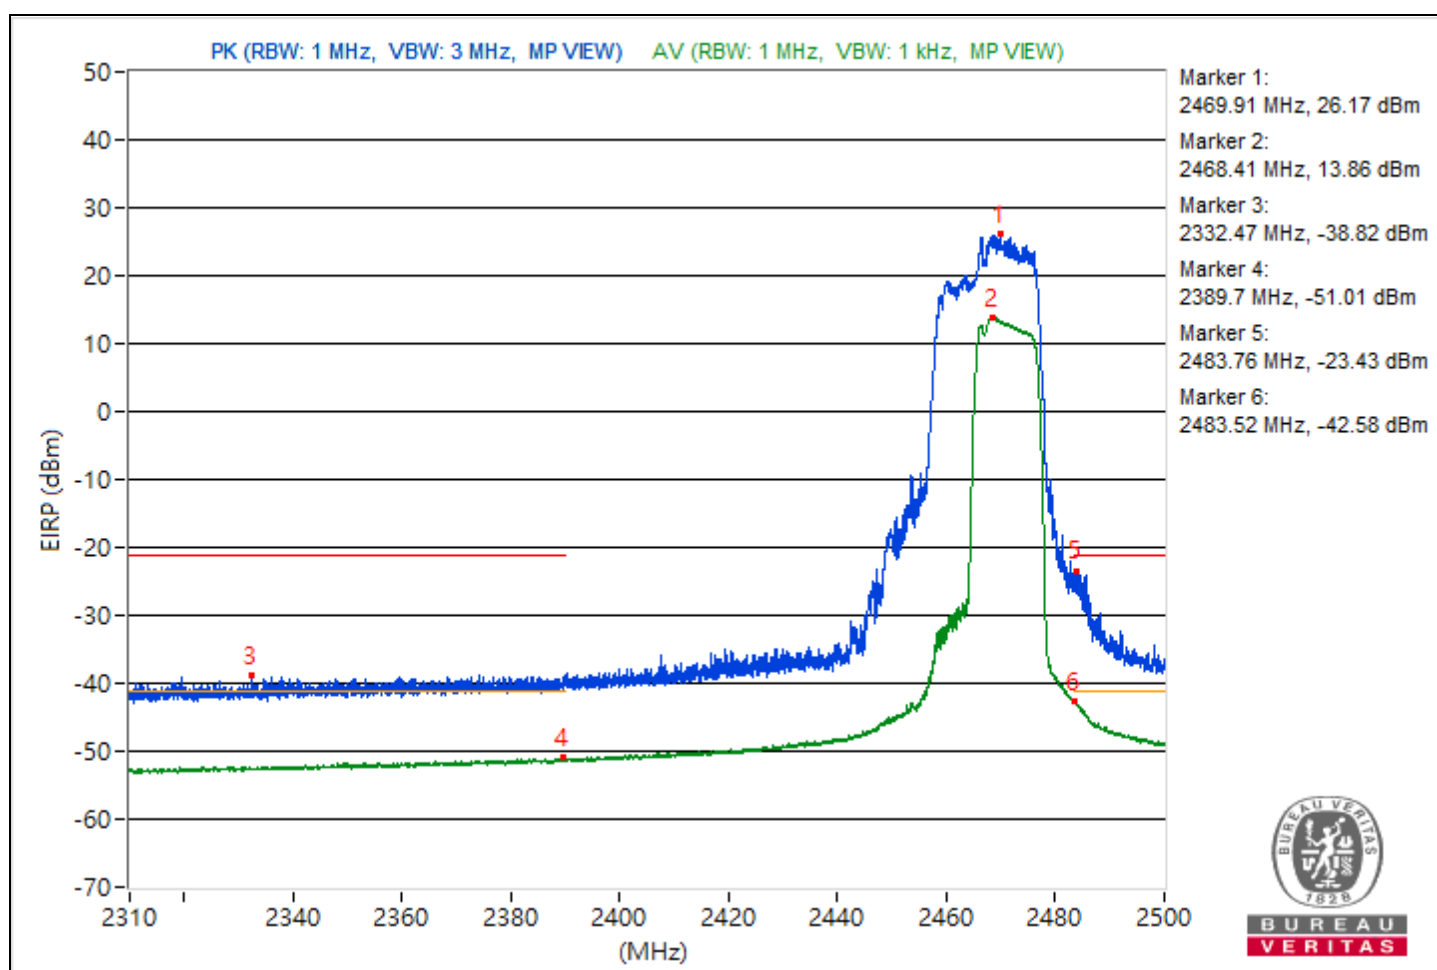

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		


Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	64.4 PK	74	-9.6	-37.05	6.19	-30.86
2	2483.5	53.1AV	54	-0.9	-48.35	6.19	-42.16

Notes:

1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

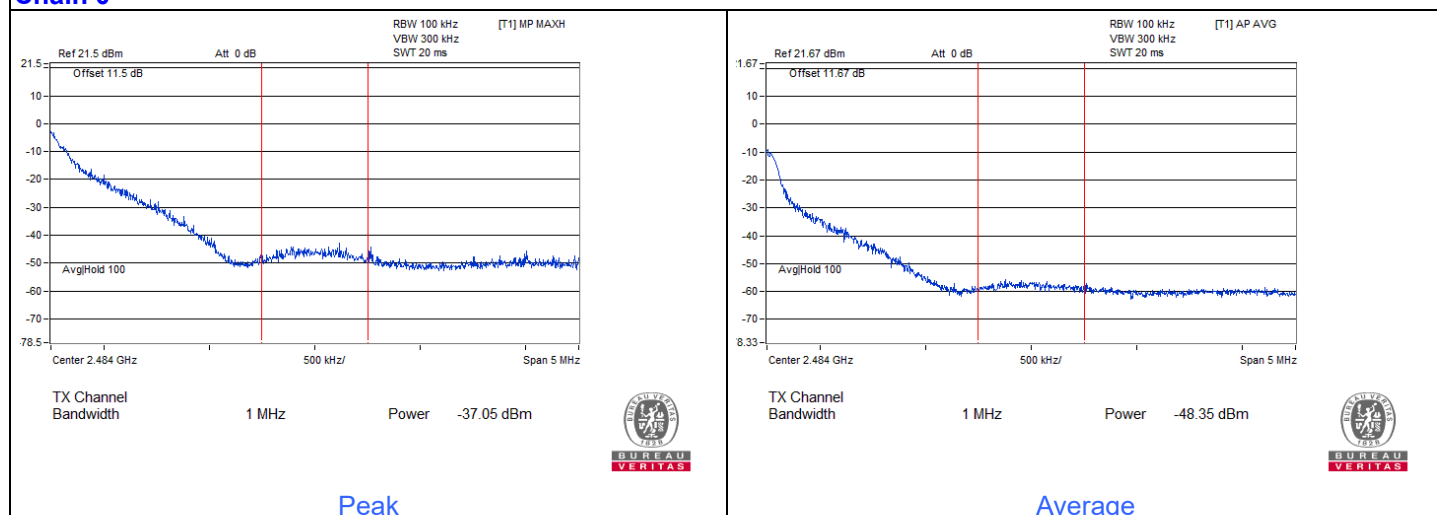


Conducted Unwanted Emissions 2TX

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.72	57.75 PK	74	-16.25	-52.16	-51.65	11.38	-37.51
2	2339.72	48.8 AV	54	-5.2	-60.66	-61.05	11.38	-46.46
3	4823.94	56.02 PK	74	-17.98	-57.62	-51.59	11.38	-39.24
4	4823.94	53.16 AV	54	-0.84	-60.8	-54.37	11.38	-42.1
5	14493.96	49.13 PK	74	-24.87	-60.38	-60.67	11.38	-46.13
6	14493.96	41.88 AV	54	-12.12	-67.99	-67.57	11.38	-53.38
7	23691	51.76 PK	74	-22.24	-59.39	-56.78	11.38	-43.5
8	23691	45.17 AV	54	-8.83	-64.68	-64.28	11.38	-50.09


Note: Margin value = Emission Level - Limit value

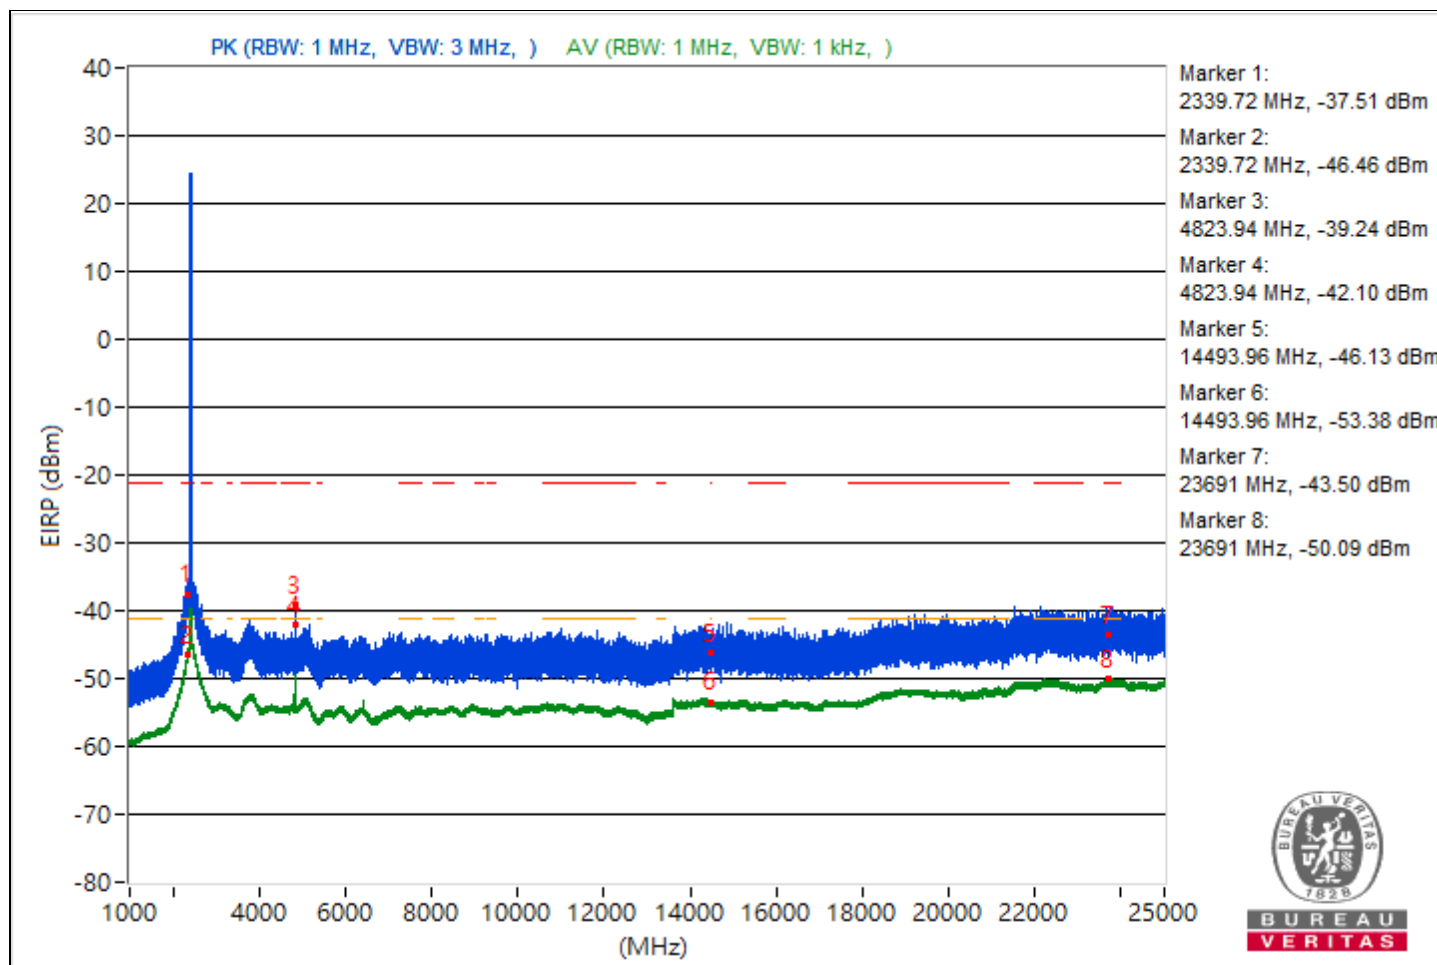

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.88	55.07 PK	74	-18.93	-55.08	-54.14	11.38	-40.19
2	2339.88	48 AV	54	-6	-61.15	-62.22	11.38	-47.26
3	4874.03	56.38 PK	74	-17.62	-56.86	-51.33	11.38	-38.88
4	4874.03	53.23 AV	54	-0.77	-62.05	-54.05	11.38	-42.03
5	14479.82	49.51 PK	74	-24.49	-60.26	-60.03	11.38	-45.75
6	14479.82	41.93 AV	54	-12.07	-67.45	-68.01	11.38	-53.33
7	23887.7	51.63 PK	74	-22.37	-57.96	-58.09	11.38	-43.63
8	23887.7	44.96 AV	54	-9.04	-65.2	-64.24	11.38	-50.3


Note: Margin value = Emission Level - Limit value

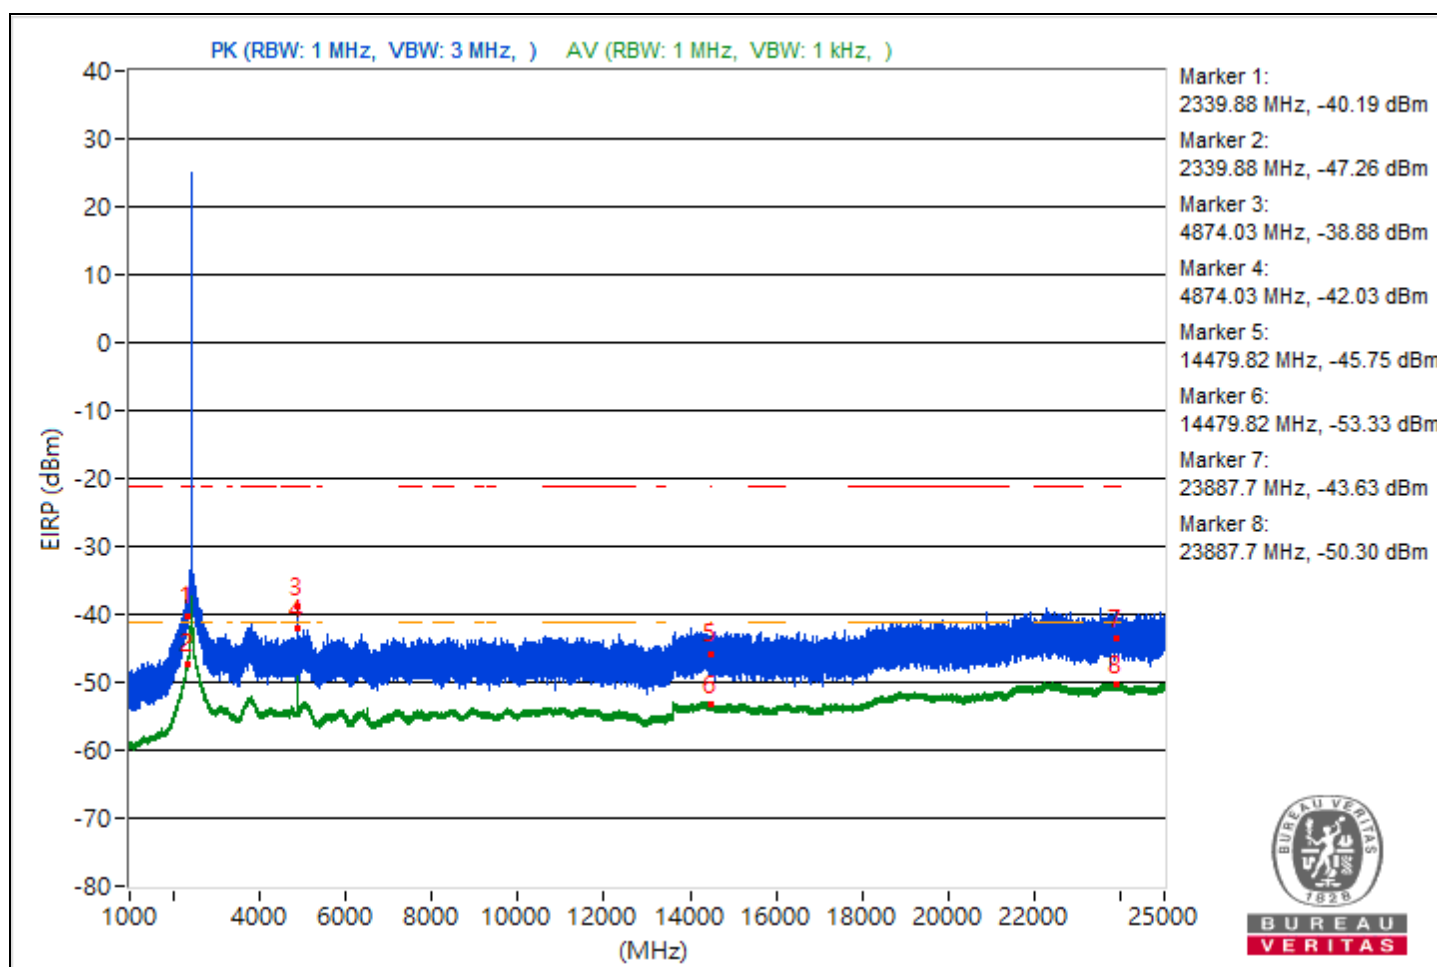

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.3	54.54 PK	74	-19.46	-55.66	-54.63	11.38	-40.72
2	2336.3	47.72 AV	54	-6.28	-61.38	-62.56	11.38	-47.54
3	4924.04	56.43 PK	74	-17.57	-56.05	-51.52	11.38	-38.83
4	4924.04	53.4 AV	54	-0.6	-62.24	-53.82	11.38	-41.86
5	14493.69	48.86 PK	74	-25.14	-59.69	-62.26	11.38	-46.4
6	14493.69	41.85 AV	54	-12.15	-68.18	-67.44	11.38	-53.41
7	23853.7	52.87 PK	74	-21.13	-55.67	-58.27	11.38	-42.39
8	23853.7	44.94 AV	54	-9.06	-64.27	-65.21	11.38	-50.32


Note: Margin value = Emission Level - Limit value

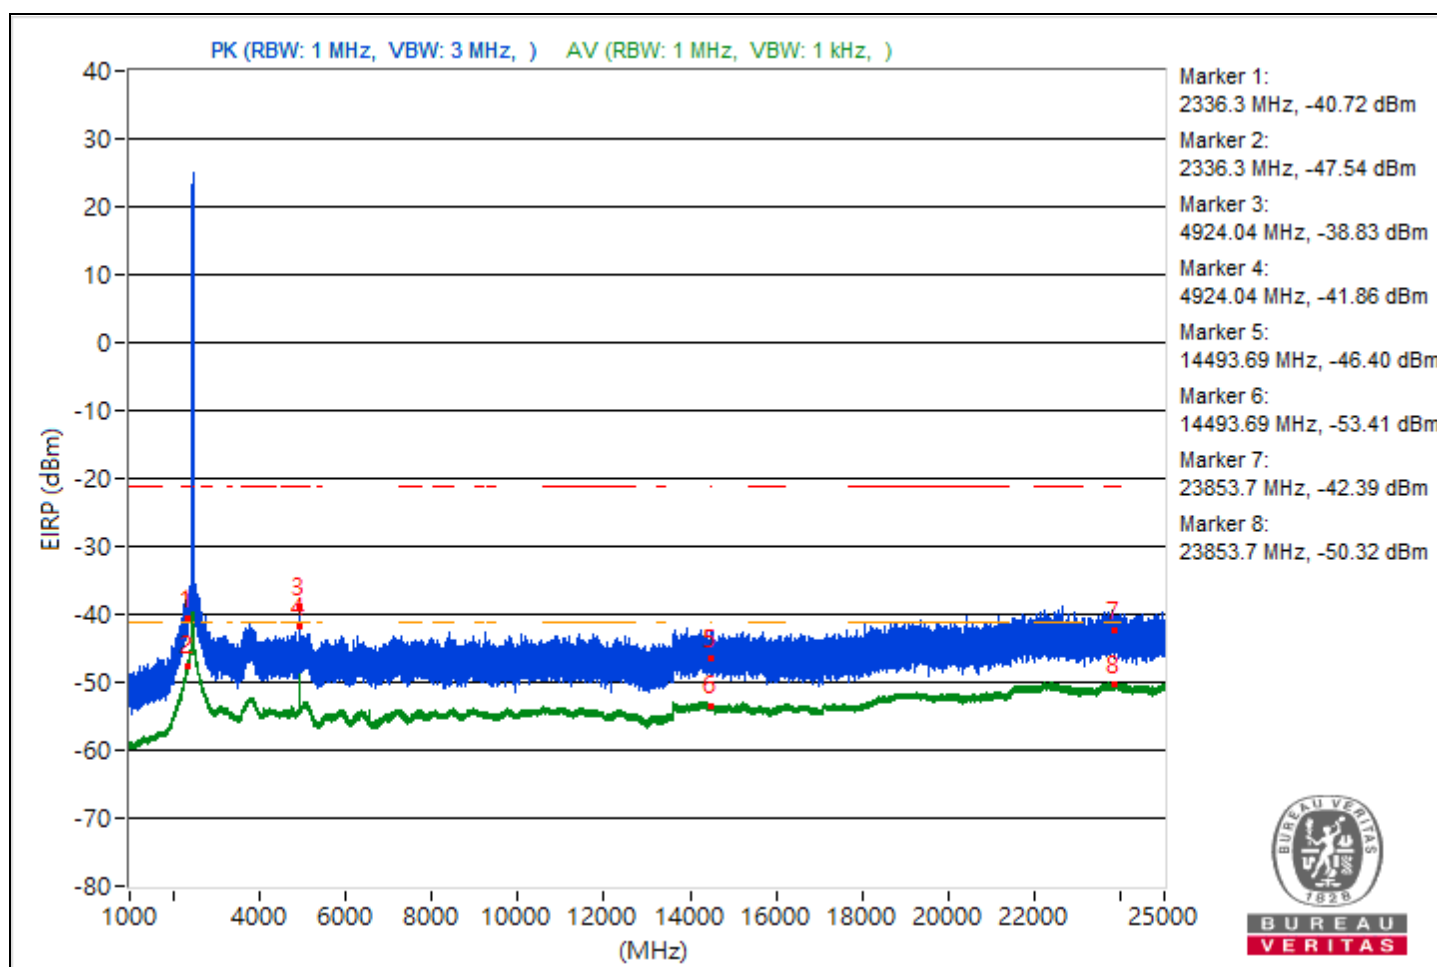

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.96	55.25 PK	74	-18.75	-54.08	-54.75	11.38	-40.01
2	2339.96	47.64 AV	54	-6.36	-61.78	-62.27	11.38	-47.62
3	4934	54.27 PK	74	-19.73	-57.1	-54.14	11.38	-40.99
4	4934	48.57 AV	54	-5.43	-66.57	-58.73	11.38	-46.69
5	14483.2	48.33 PK	74	-25.67	-60.81	-61.91	11.38	-46.93
6	14483.2	41.9 AV	54	-12.1	-68.06	-67.45	11.38	-53.36
7	23655.4	54.11 PK	74	-19.89	-55.32	-55.78	11.38	-41.15
8	23655.4	45.02 AV	54	-8.98	-65.11	-64.21	11.38	-50.24


Note: Margin value = Emission Level - Limit value

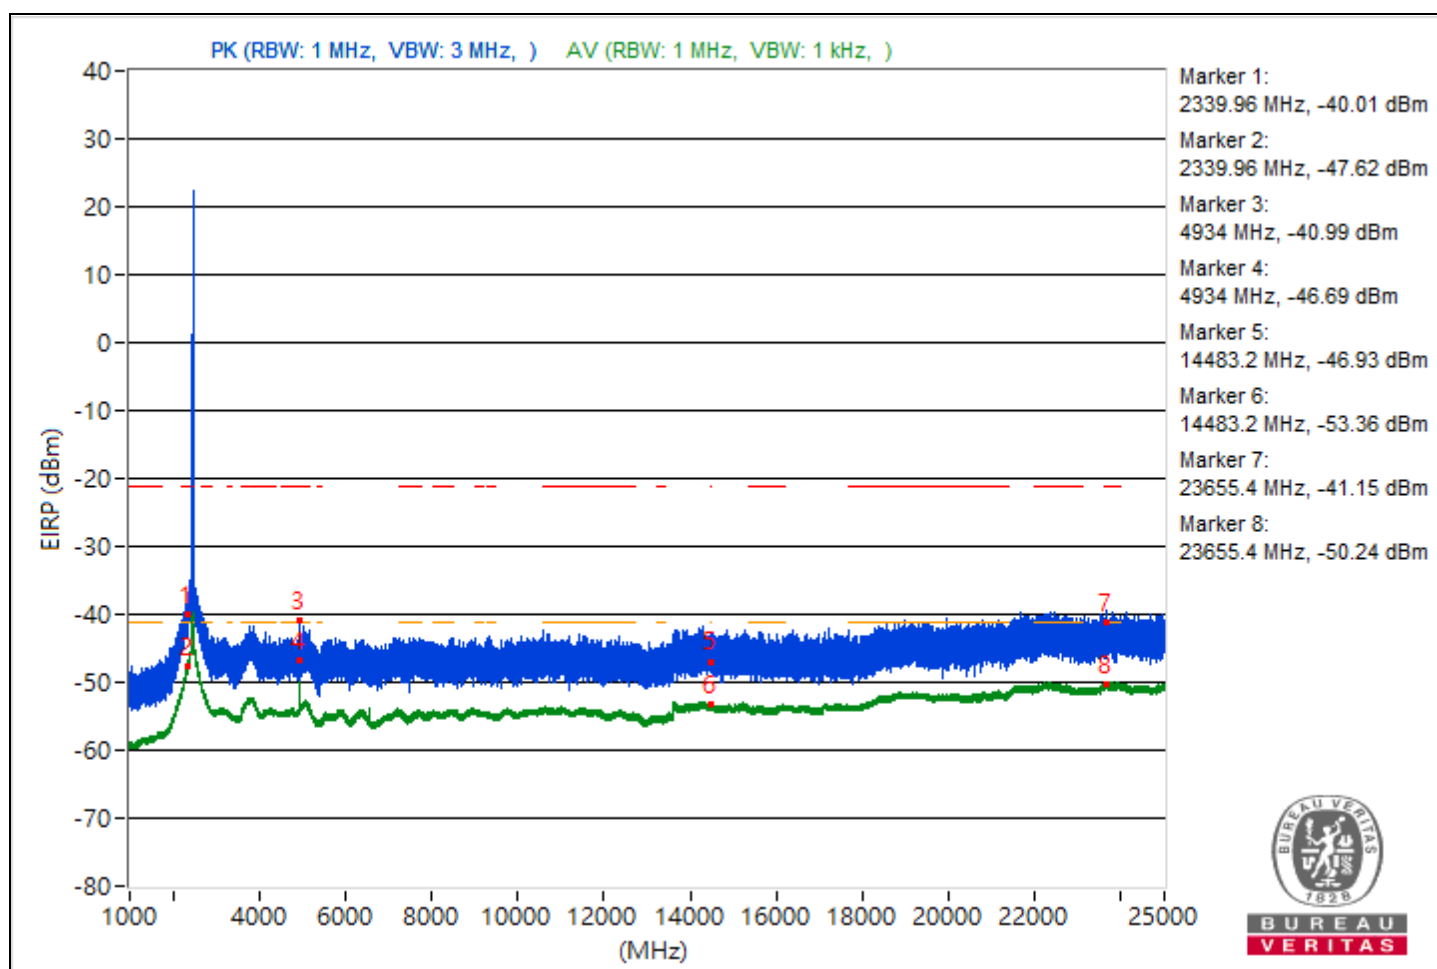

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2332.8	50.89 PK	74	-23.11	-59.2	-58.35	11.38	-44.37
2	2332.8	43.46 AV	54	-10.54	-66.2	-66.18	11.38	-51.8
3	3783.2	50.83 PK	74	-23.17	-57.83	-60.11	11.38	-44.43
4	3783.2	43.15 AV	54	-10.85	-66.74	-66.28	11.38	-52.11
5	14481.69	49.47 PK	74	-24.53	-61.06	-59.45	11.38	-45.79
6	14481.69	41.97 AV	54	-12.03	-67.9	-67.47	11.38	-53.29
7	22316.1	53.56 PK	74	-20.44	-55.9	-56.28	11.38	-41.7
8	22316.1	45.16 AV	54	-8.84	-64.15	-64.85	11.38	-50.1


Note: Margin value = Emission Level - Limit value

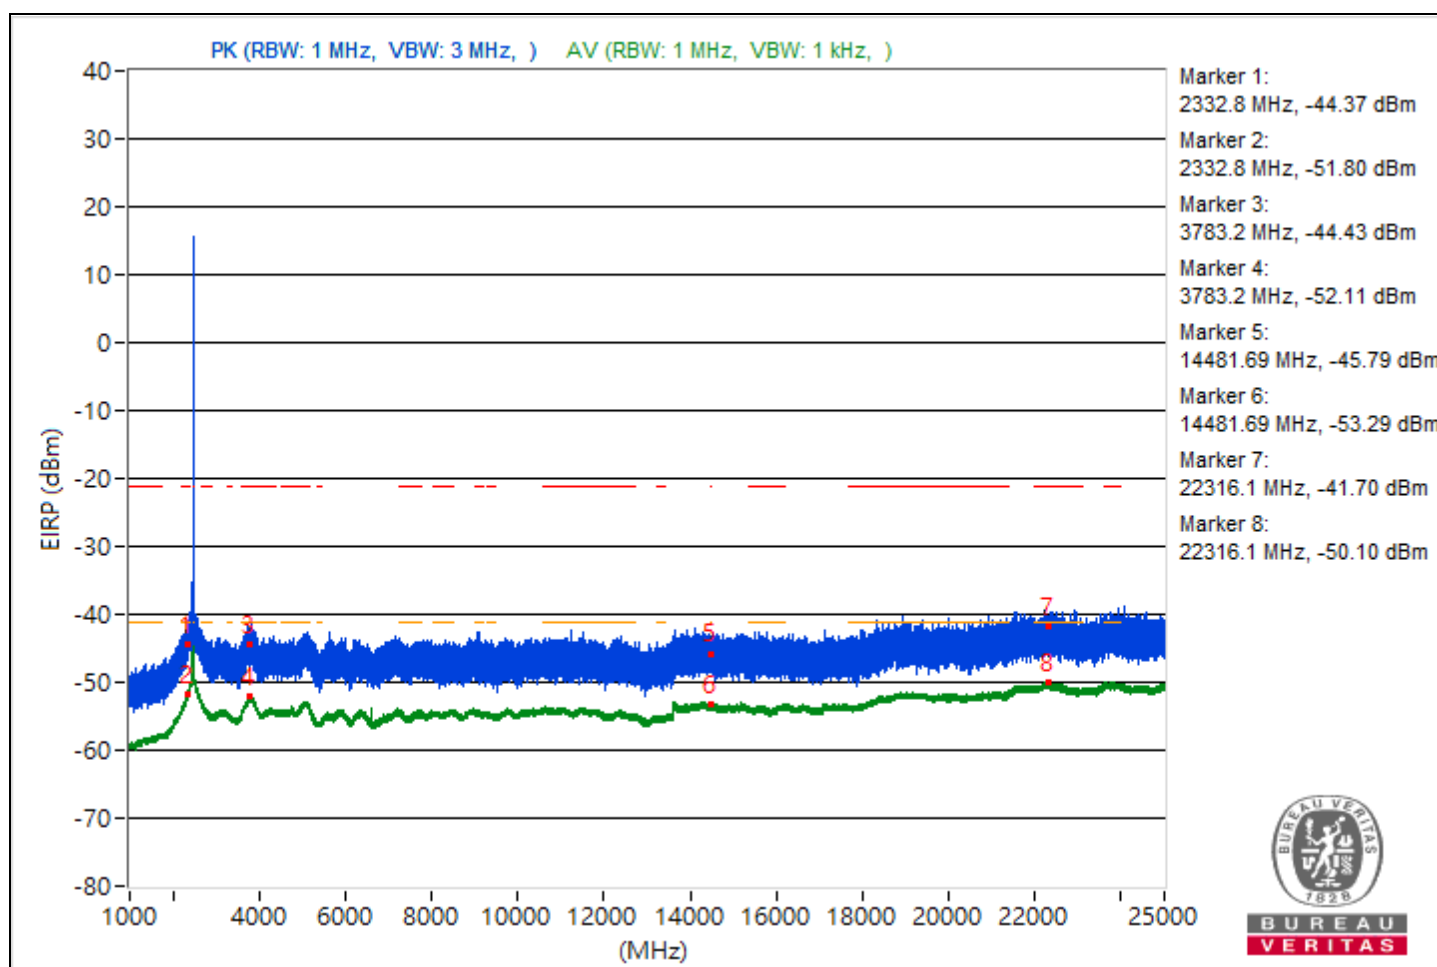

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.02	56.31 PK	74	-17.69	-54.1	-52.69	11.38	-38.95
2	2339.02	48.09 AV	54	-5.91	-61.11	-62.07	11.38	-47.17
3	4823.01	52.99 PK	74	-21.01	-59.32	-55.02	11.38	-42.27
4	4823.01	45.91 AV	54	-8.09	-67.24	-61.82	11.38	-49.35
5	14473.33	49.71 PK	74	-24.29	-58.95	-61.23	11.38	-45.55
6	14473.33	41.96 AV	54	-12.04	-67.86	-67.52	11.38	-53.3
7	23987.6	52.62 PK	74	-21.38	-56.59	-57.53	11.38	-42.64
8	23987.6	45.02 AV	54	-8.98	-65.05	-64.24	11.38	-50.24


Note: Margin value = Emission Level - Limit value

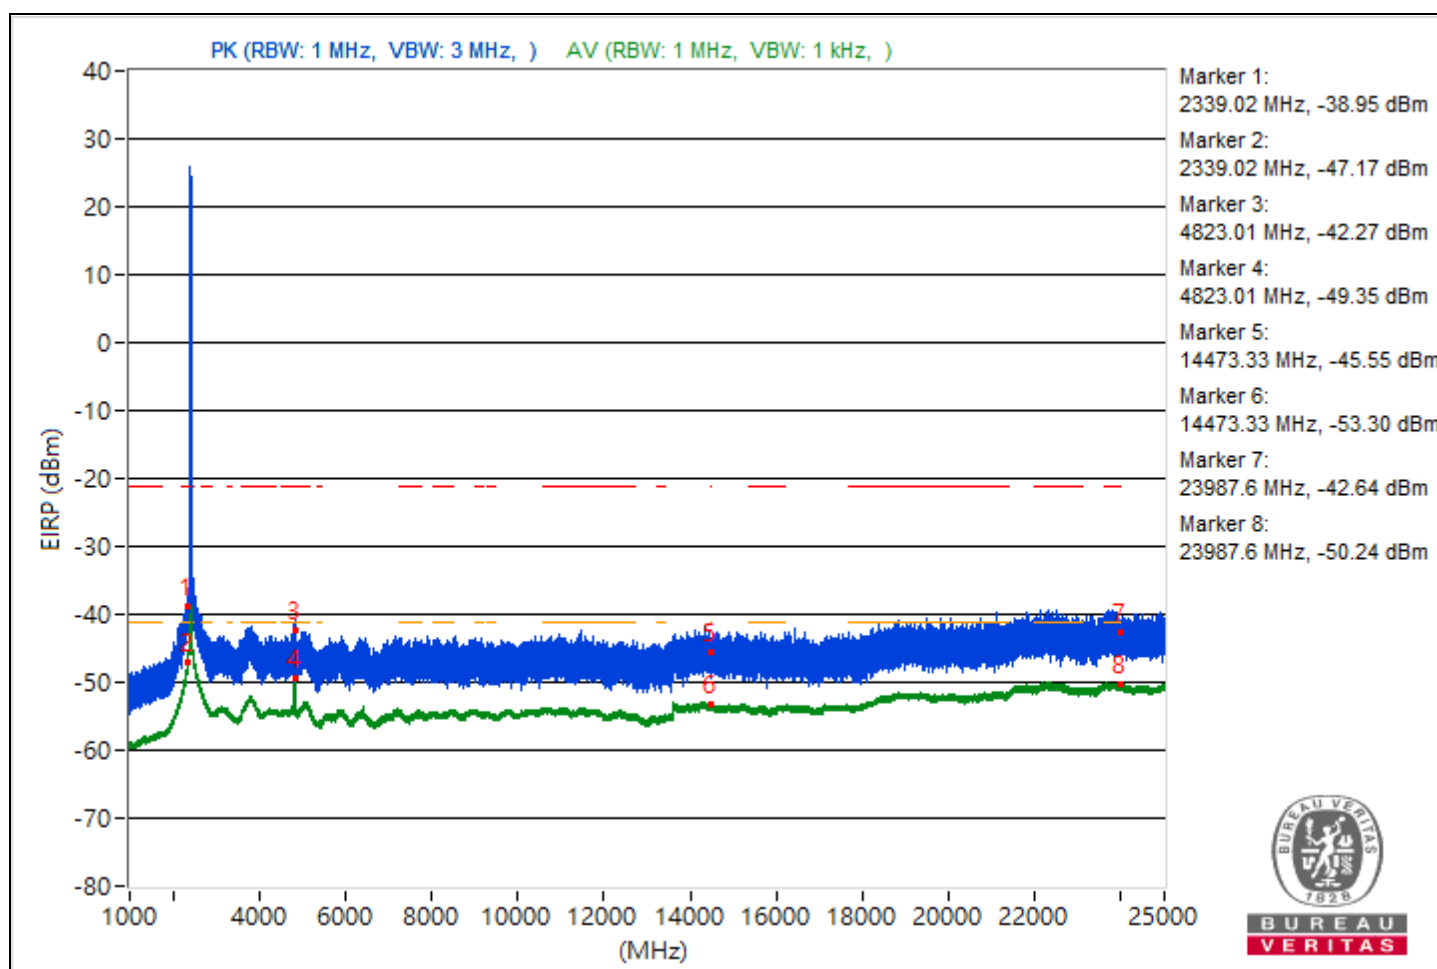

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.88	57.43 PK	74	-16.57	-53.11	-51.48	11.38	-37.83
2	2339.88	49.55 AV	54	-4.45	-59.67	-60.59	11.38	-45.71
3	4873.57	60.81 PK	74	-13.19	-50.34	-47.73	11.38	-34.45
4	4873.57	53.15 AV	54	-0.85	-60.83	-54.38	11.38	-42.11
5	14478.22	50 PK	74	-24	-59.62	-59.68	11.38	-45.26
6	14478.22	41.88 AV	54	-12.12	-67.41	-68.18	11.38	-53.38
7	23737.2	53.44 PK	74	-20.56	-57.78	-55.06	11.38	-41.82
8	23737.2	45.16 AV	54	-8.84	-64.76	-64.25	11.38	-50.1


Note: Margin value = Emission Level - Limit value

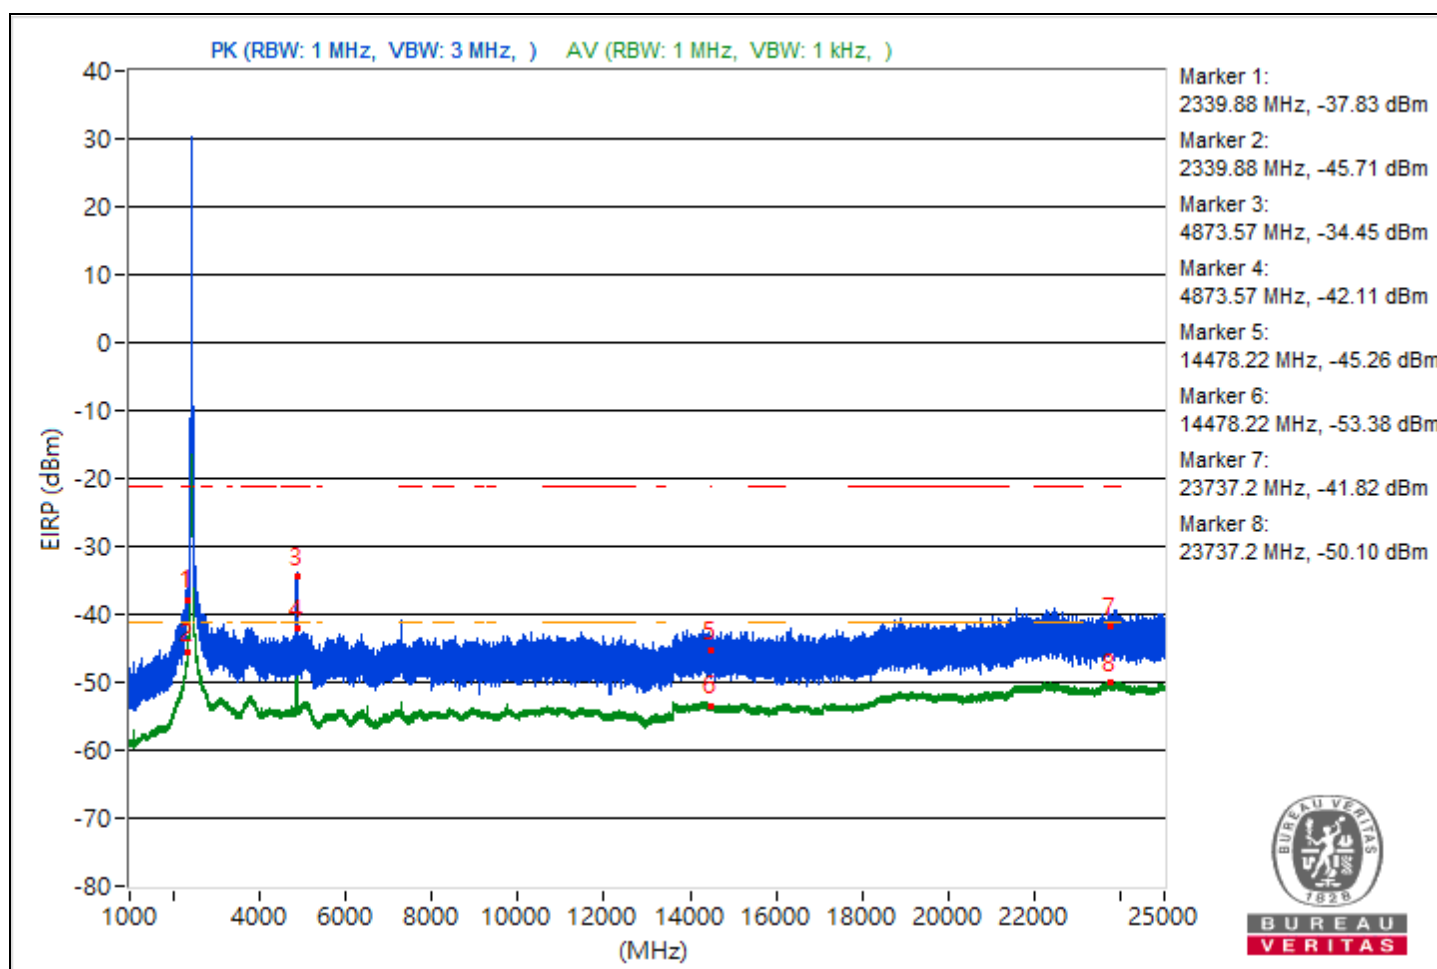

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2334.98	52.93 PK	74	-21.07	-57.01	-56.45	11.38	-42.33
2	2334.98	46.64 AV	54	-7.36	-62.89	-63.13	11.38	-48.62
3	4923.89	53.6 PK	74	-20.4	-60.88	-53.83	11.38	-41.66
4	4923.89	46.19 AV	54	-7.81	-67.86	-61.32	11.38	-49.07
5	14474.04	49.81 PK	74	-24.19	-58.87	-61.09	11.38	-45.45
6	14474.04	42.09 AV	54	-11.91	-67.35	-67.79	11.38	-53.17
7	23849.2	52.34 PK	74	-21.66	-56.74	-57.96	11.38	-42.92
8	23849.2	45.14 AV	54	-8.86	-64.82	-64.23	11.38	-50.12


Note: Margin value = Emission Level - Limit value

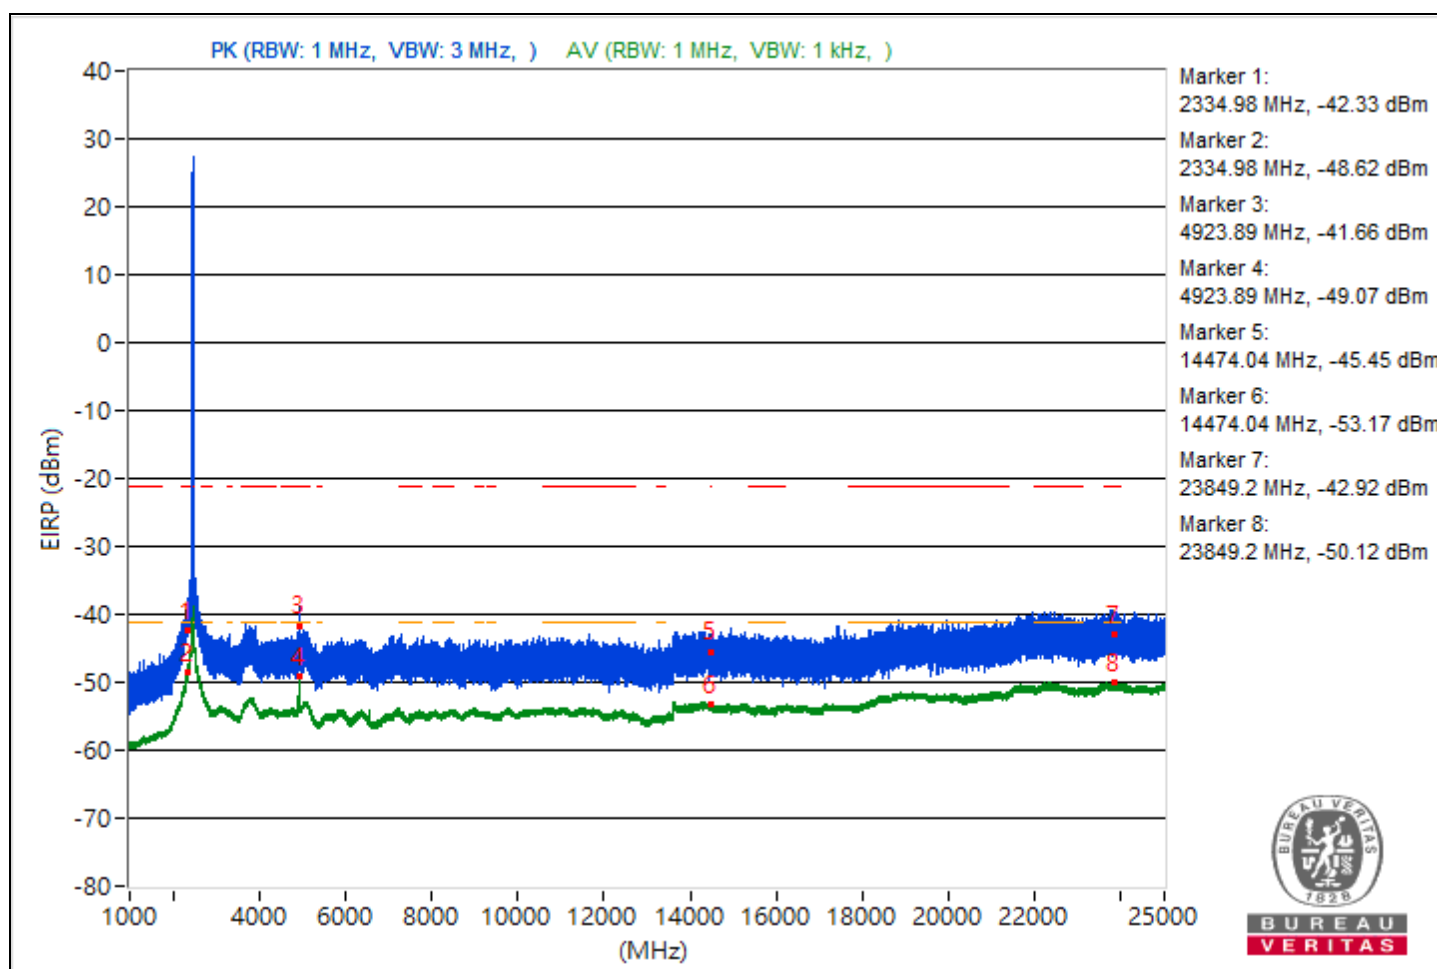

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.64	56 PK	74	-18	-54.14	-53.22	11.38	-39.26
2	2339.64	46.35 AV	54	-7.65	-62.98	-63.65	11.38	-48.91
3	4933.3	53.05 PK	74	-20.95	-59.46	-54.89	11.38	-42.21
4	4933.3	44.12 AV	54	-9.88	-68.48	-63.79	11.38	-51.14
5	14480.98	48.63 PK	74	-25.37	-60.12	-62.16	11.38	-46.63
6	14480.98	41.92 AV	54	-12.08	-68.07	-67.42	11.38	-53.34
7	22291.2	50.66 PK	74	-23.34	-60.11	-58.11	11.38	-44.6
8	22291.2	45.03 AV	54	-8.97	-64.21	-65.07	11.38	-50.23


Note: Margin value = Emission Level - Limit value

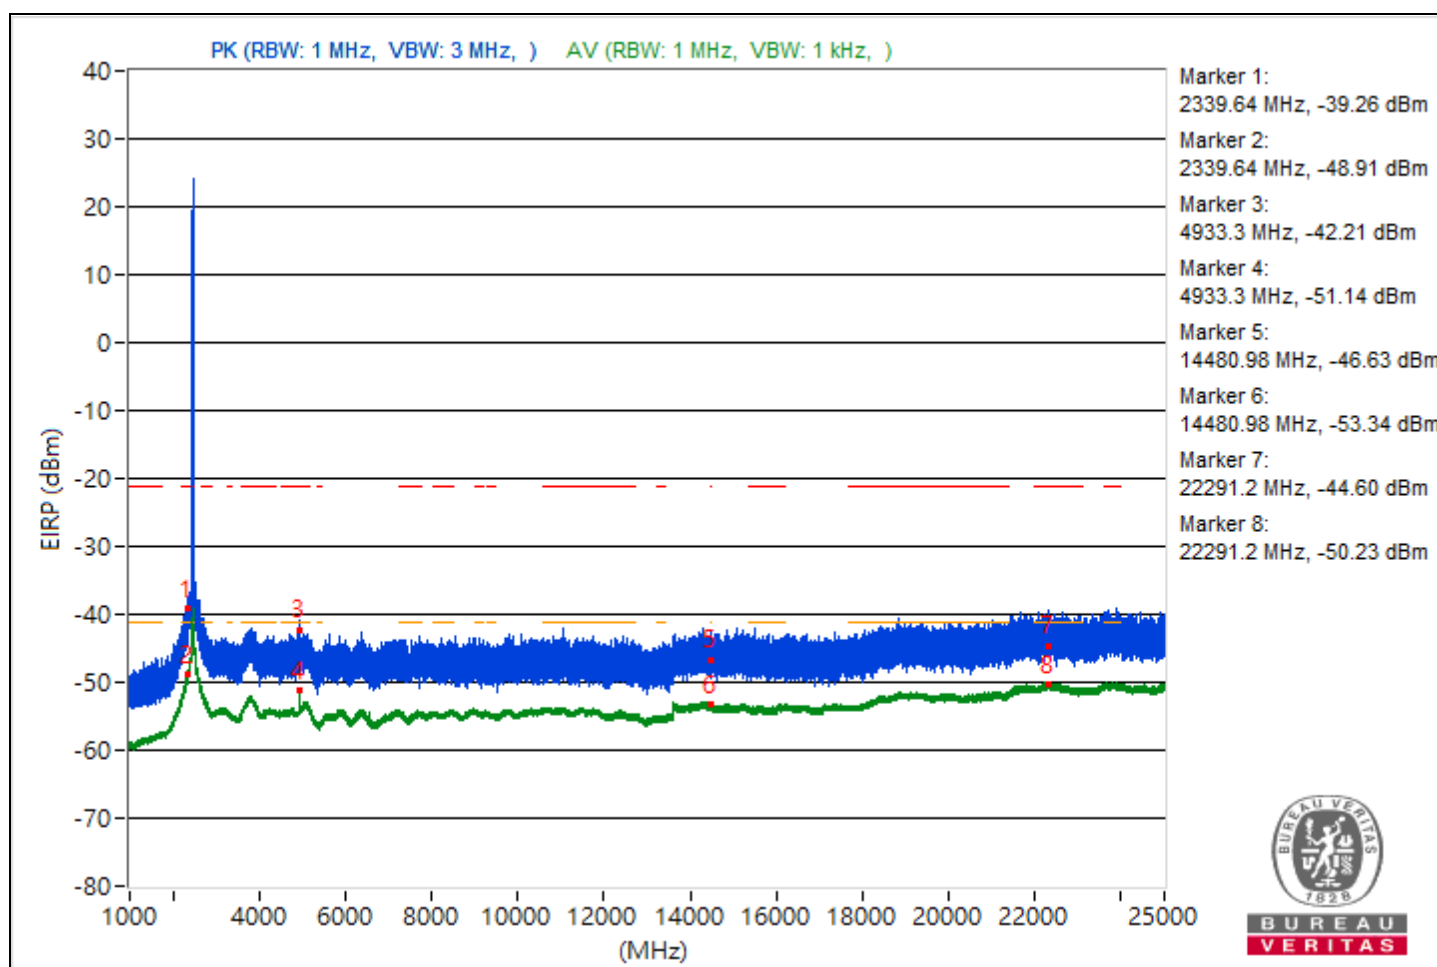

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	23°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.96	52.87 PK	74	-21.13	-56.9	-56.68	11.38	-42.39
2	2339.96	46.23 AV	54	-7.77	-63.05	-63.82	11.38	-49.03
3	3831.11	52.99 PK	74	-21.01	-56.5	-56.83	11.38	-42.27
4	3831.11	44.78 AV	54	-9.22	-65.2	-64.56	11.38	-50.48
5	14472.36	49.8 PK	74	-24.2	-61.87	-58.47	11.38	-45.46
6	14472.36	42.57 AV	54	-11.43	-66.96	-67.2	11.38	-52.69
7	23843.3	52.91 PK	74	-21.09	-57.91	-55.82	11.38	-42.35
8	23843.3	46.11 AV	54	-7.89	-63.84	-63.25	11.38	-49.15

Note: Margin value = Emission Level - Limit value

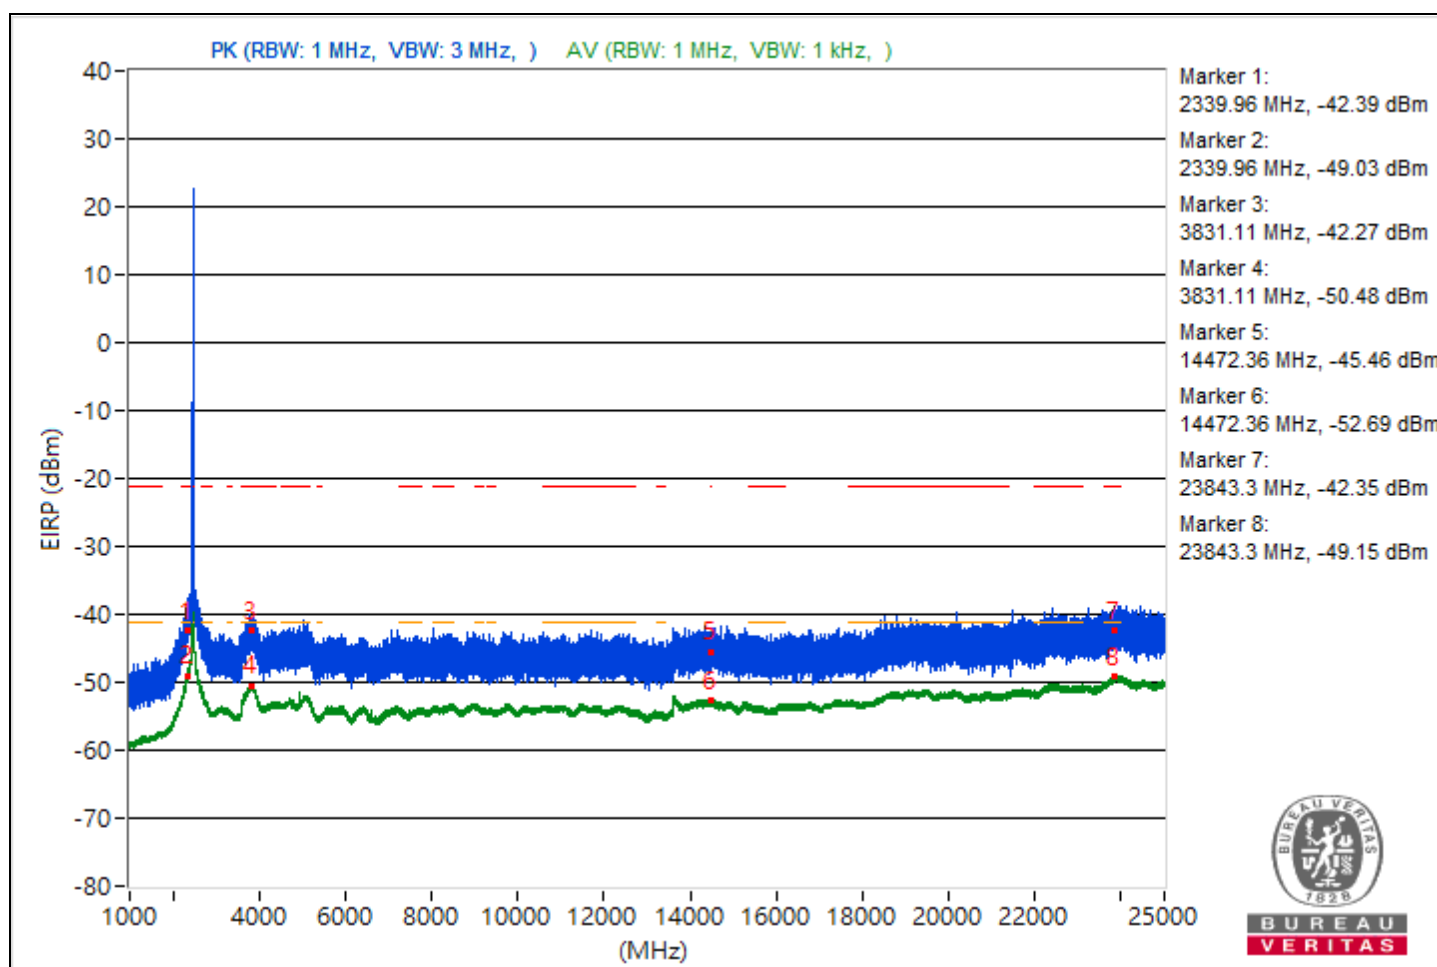


2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.96	54.74 PK	74	-19.26	-50.29	-54.48	8.37	-40.52
2	2339.96	45.29 AV	54	-8.71	-60.68	-62.13	8.37	-49.97
3	4823.01	48.16 PK	74	-25.84	-60.84	-56.96	8.37	-47.1
4	4823.01	43.02 AV	54	-10.98	-66.4	-61.93	8.37	-52.24
5	14471.64	47.9 PK	74	-26.1	-59.96	-57.78	8.37	-47.36
6	14471.64	38.84 AV	54	-15.16	-68.35	-67.3	8.37	-56.42
7	22214.4	48.5 PK	74	-25.5	-58.02	-58.27	8.37	-46.76
8	22214.4	42.13 AV	54	-11.87	-64.1	-64.97	8.37	-53.13


Note: Margin value = Emission Level - Limit value

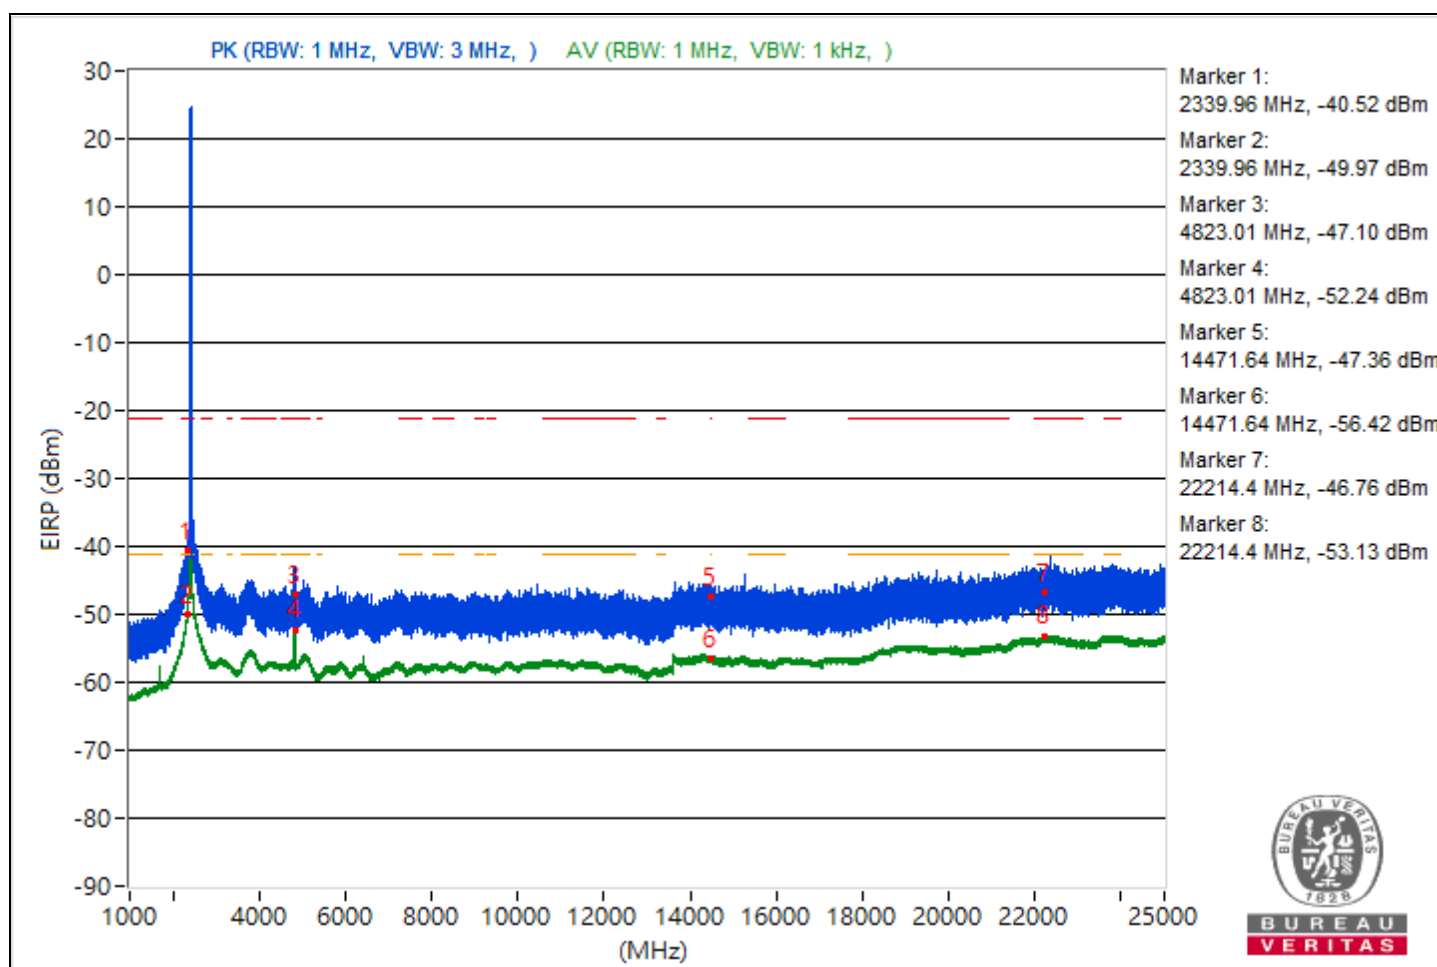

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.33	54.67 PK	74	-19.33	-51.23	-52.88	8.37	-40.59
2	2339.33	46.45 AV	54	-7.55	-59.81	-60.6	8.37	-48.81
3	4874.34	55.61 PK	74	-18.39	-52.57	-49.9	8.37	-39.65
4	4874.34	48.6 AV	54	-5.4	-61.01	-56.3	8.37	-46.66
5	14485.96	43.64 PK	74	-30.36	-62.64	-63.4	8.37	-51.62
6	14485.96	38.7 AV	54	-15.3	-67.52	-68.39	8.37	-56.56
7	22300.8	47.53 PK	74	-26.47	-58.11	-60.39	8.37	-47.73
8	22300.8	42.2 AV	54	-11.8	-64.73	-64.16	8.37	-53.06


Note: Margin value = Emission Level - Limit value

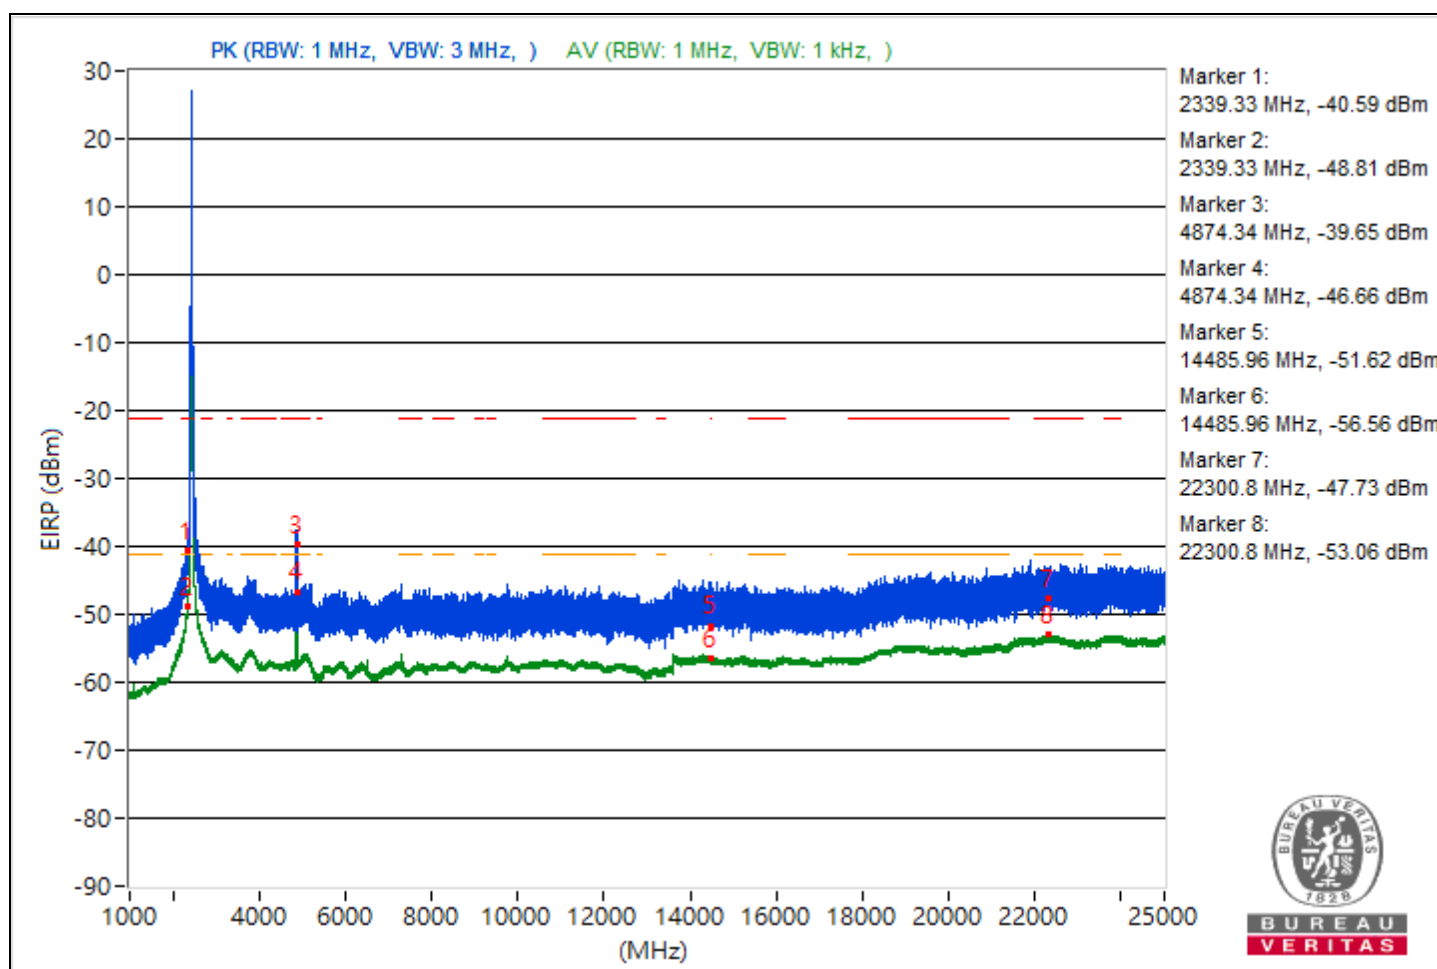

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.16	50.82 PK	74	-23.18	-55.16	-56.6	8.37	-44.44
2	2337.16	44.14 AV	54	-9.86	-62.43	-62.58	8.37	-51.12
3	4922.72	53.16 PK	74	-20.84	-58.48	-51.21	8.37	-42.1
4	4922.72	44.24 AV	54	-9.76	-66.4	-60.35	8.37	-51.02
5	14483.47	46.24 PK	74	-27.76	-61.07	-59.82	8.37	-49.02
6	14483.47	38.92 AV	54	-15.08	-67.35	-68.12	8.37	-56.34
7	23922.4	50.82 PK	74	-23.18	-54.96	-56.91	8.37	-44.44
8	23922.4	42.02 AV	54	-11.98	-64.97	-64.29	8.37	-53.24


Note: Margin value = Emission Level - Limit value

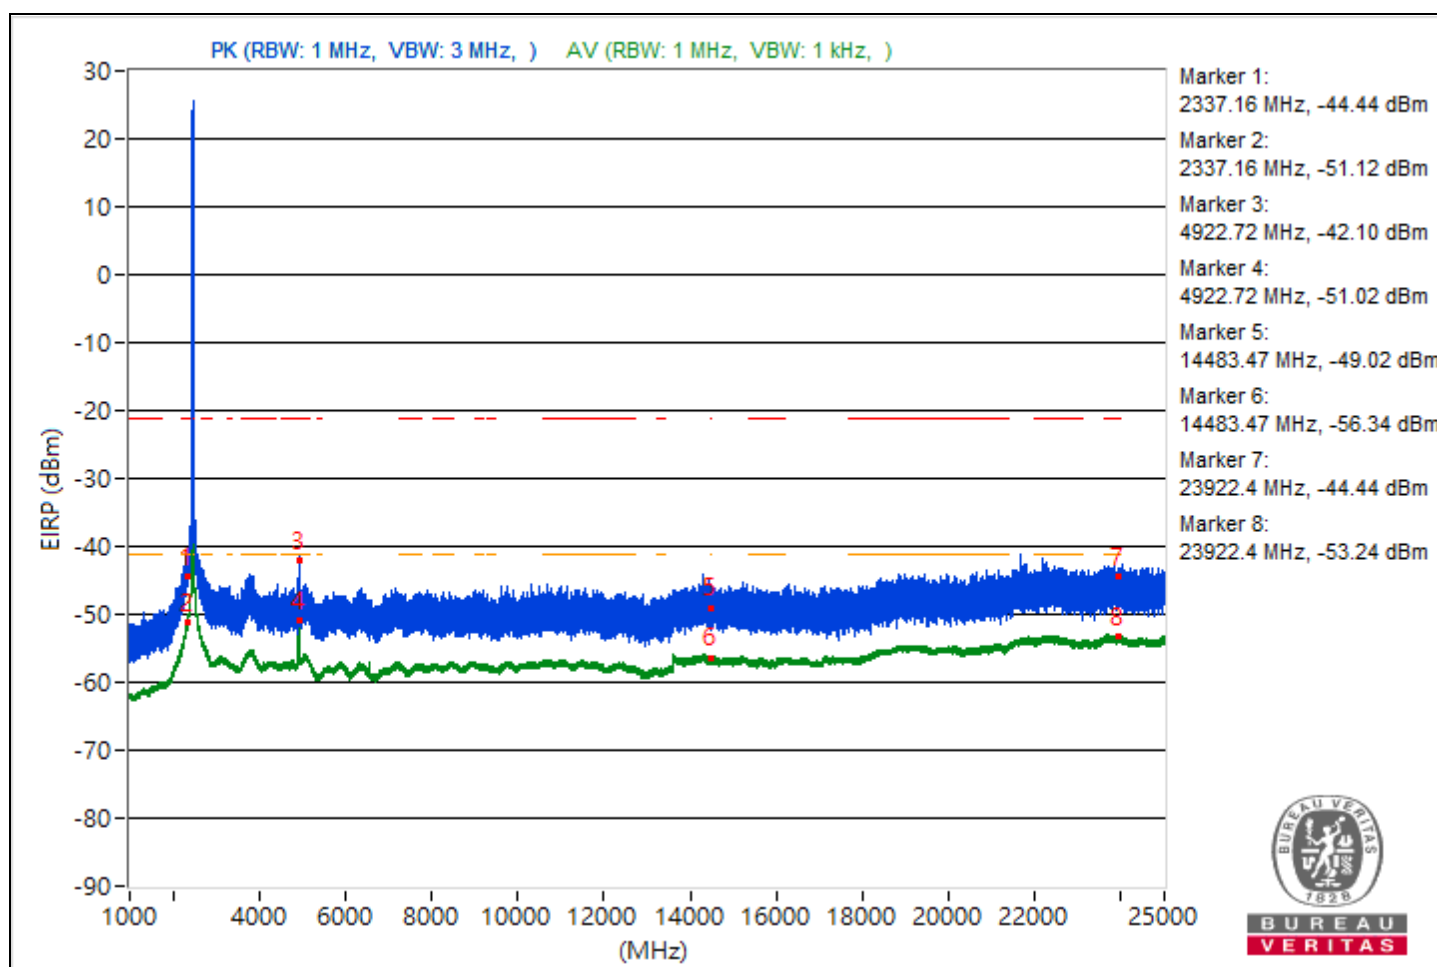

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.4	51.72 PK	74	-22.28	-54.56	-55.32	8.37	-43.54
2	2338.4	43.66 AV	54	-10.34	-62.6	-63.39	8.37	-51.6
3	4936.33	48.99 PK	74	-25.01	-61.66	-55.6	8.37	-46.27
4	4936.33	40.99 AV	54	-13.01	-67.92	-64.17	8.37	-54.27
5	14484.27	45.95 PK	74	-28.05	-60.02	-61.49	8.37	-49.31
6	14484.27	38.79 AV	54	-15.21	-68.12	-67.59	8.37	-56.47
7	22505.6	48.11 PK	74	-25.89	-58.55	-58.51	8.37	-47.15
8	22505.6	42.13 AV	54	-11.87	-64.2	-64.85	8.37	-53.13


Note: Margin value = Emission Level - Limit value

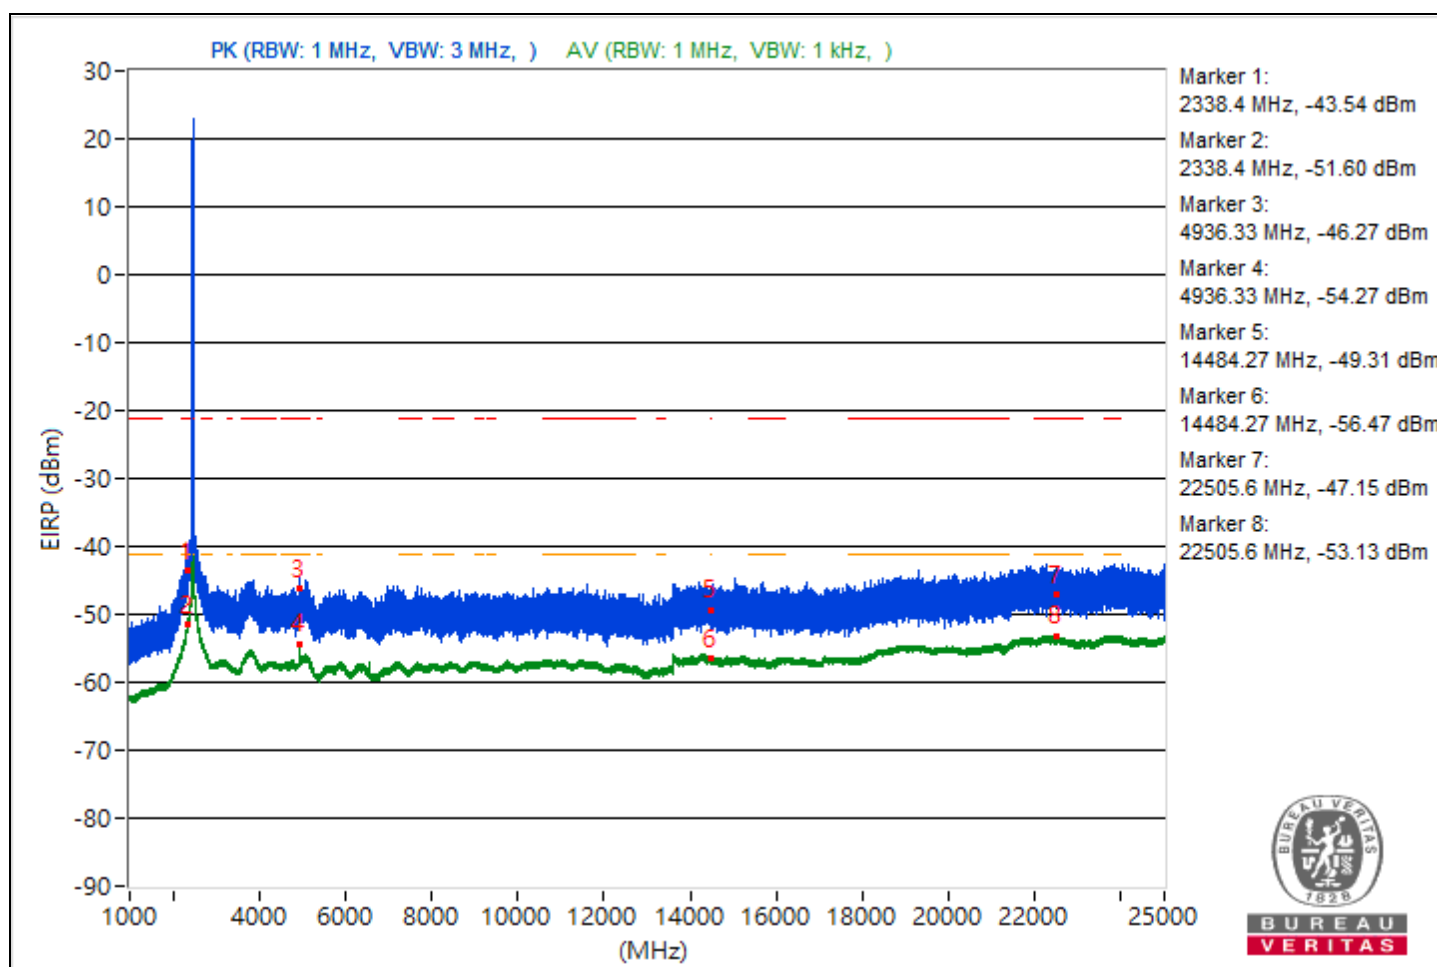

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	23°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.16	51.42 PK	74	-22.58	-54.12	-56.69	8.37	-43.84
2	2337.16	43.31 AV	54	-10.69	-62.83	-63.9	8.37	-51.95
3	3788.1	48.81 PK	74	-25.19	-56.93	-58.96	8.37	-46.45
4	3788.1	41.74 AV	54	-12.26	-64.67	-65.14	8.37	-53.52
5	14499.56	47.84 PK	74	-26.16	-59.76	-58.01	8.37	-47.42
6	14499.56	39.54 AV	54	-14.46	-67.55	-66.69	8.37	-55.72
7	23865.2	51.4 PK	74	-22.6	-54.92	-55.59	8.37	-43.86
8	23865.2	43.25 AV	54	-10.75	-63.73	-63.08	8.37	-52.01


Note: Margin value = Emission Level - Limit value

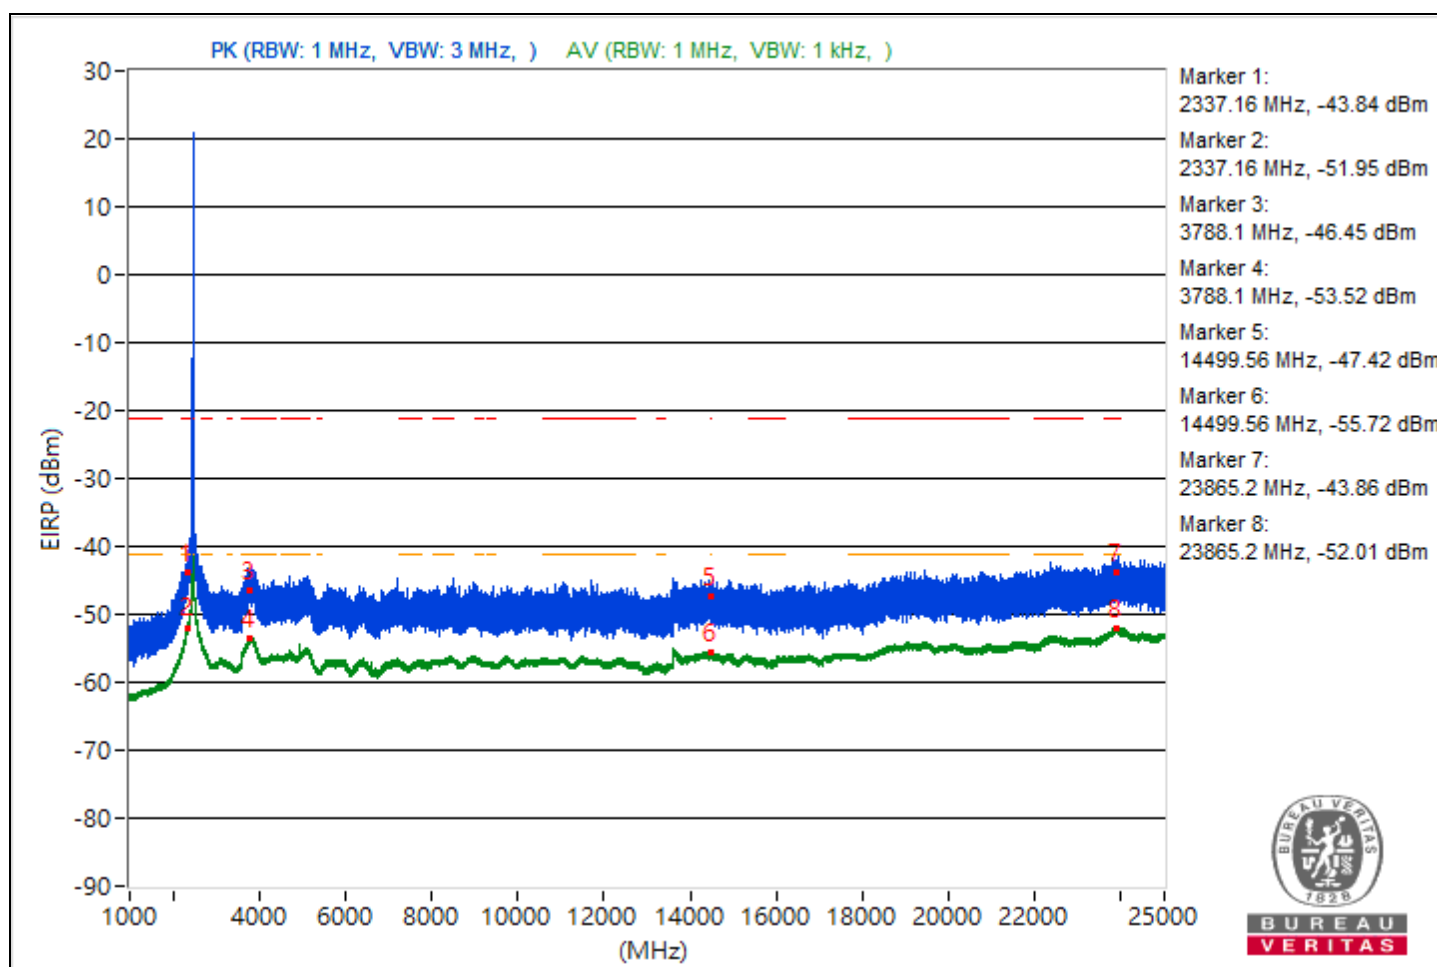

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.09	53.08 PK	74	-20.92	-53.64	-53.49	8.37	-42.18
2	2338.09	44.81 AV	54	-9.19	-61.39	-62.31	8.37	-50.45
3	2690.34	48.26 PK	74	-25.74	-57.54	-59.42	8.37	-47
4	2690.34	40.45 AV	54	-13.55	-66.24	-66.13	8.37	-54.81
5	14471.56	47.3 PK	74	-26.7	-59.11	-59.58	8.37	-47.96
6	14471.56	38.83 AV	54	-15.17	-67.51	-68.13	8.37	-56.43
7	23626.4	49.02 PK	74	-24.98	-57.28	-58	8.37	-46.24
8	23626.4	42.13 AV	54	-11.87	-64.75	-64.28	8.37	-53.13


Note: Margin value = Emission Level - Limit value

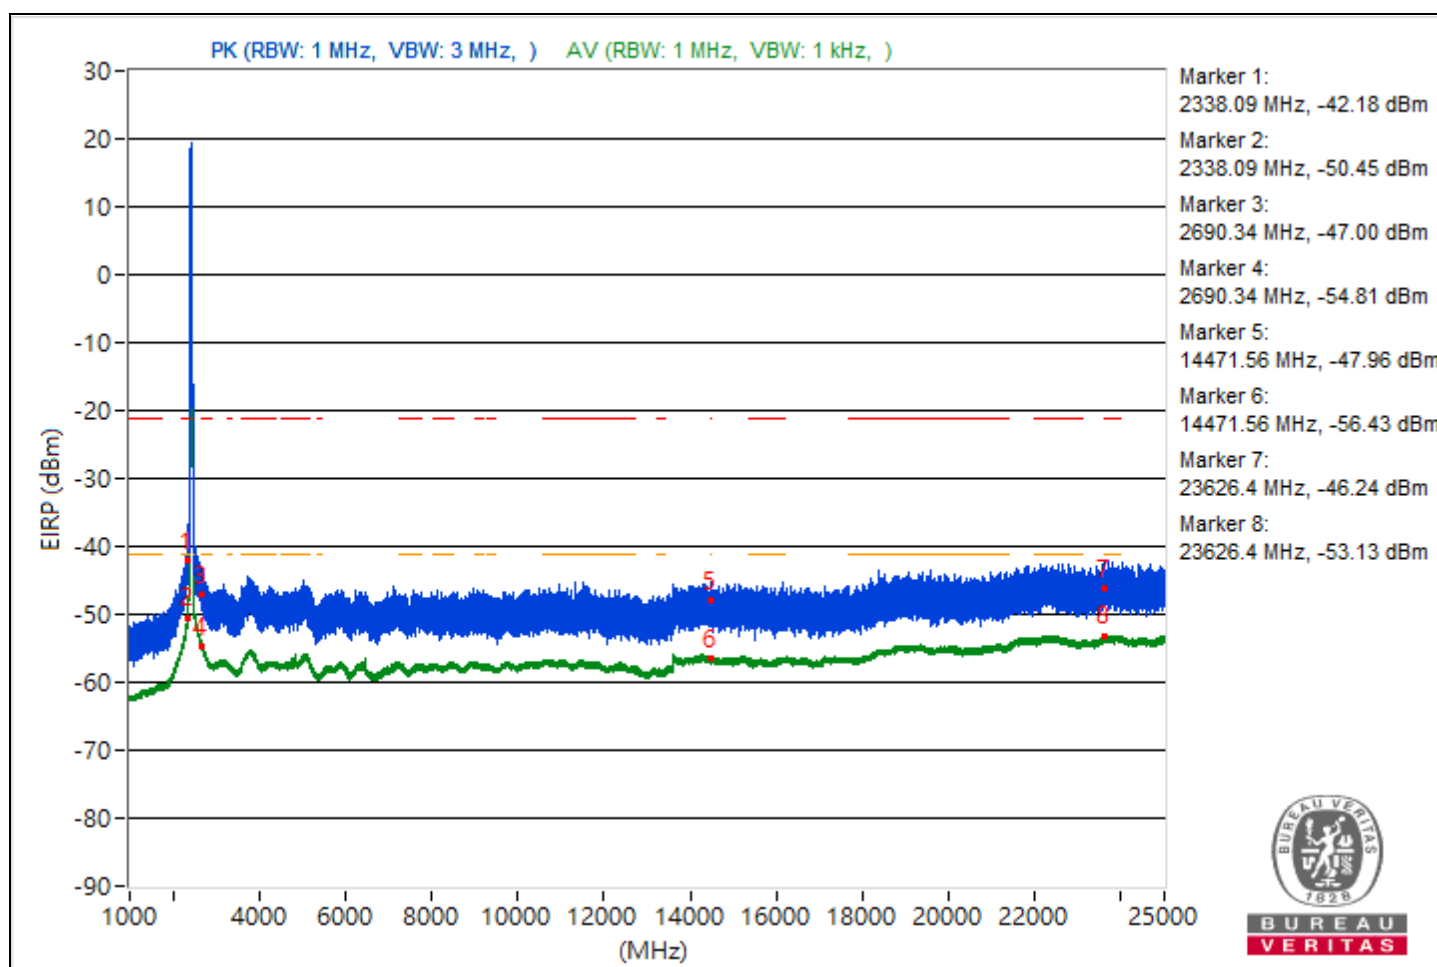

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.96	52.33 PK	74	-21.67	-55.35	-53.47	8.37	-42.93
2	2339.96	45.24 AV	54	-8.76	-61.28	-61.52	8.37	-50.02
3	4871.86	48.46 PK	74	-25.54	-59.99	-56.9	8.37	-46.8
4	4871.86	41.55 AV	54	-12.45	-67.57	-63.53	8.37	-53.71
5	14483.47	47.61 PK	74	-26.39	-58.7	-59.38	8.37	-47.65
6	14483.47	39.12 AV	54	-14.88	-67.43	-67.61	8.37	-56.14
7	22219.6	49.1 PK	74	-24.9	-59.75	-56.08	8.37	-46.16
8	22219.6	42.24 AV	54	-11.76	-64.64	-64.18	8.37	-53.02


Note: Margin value = Emission Level - Limit value

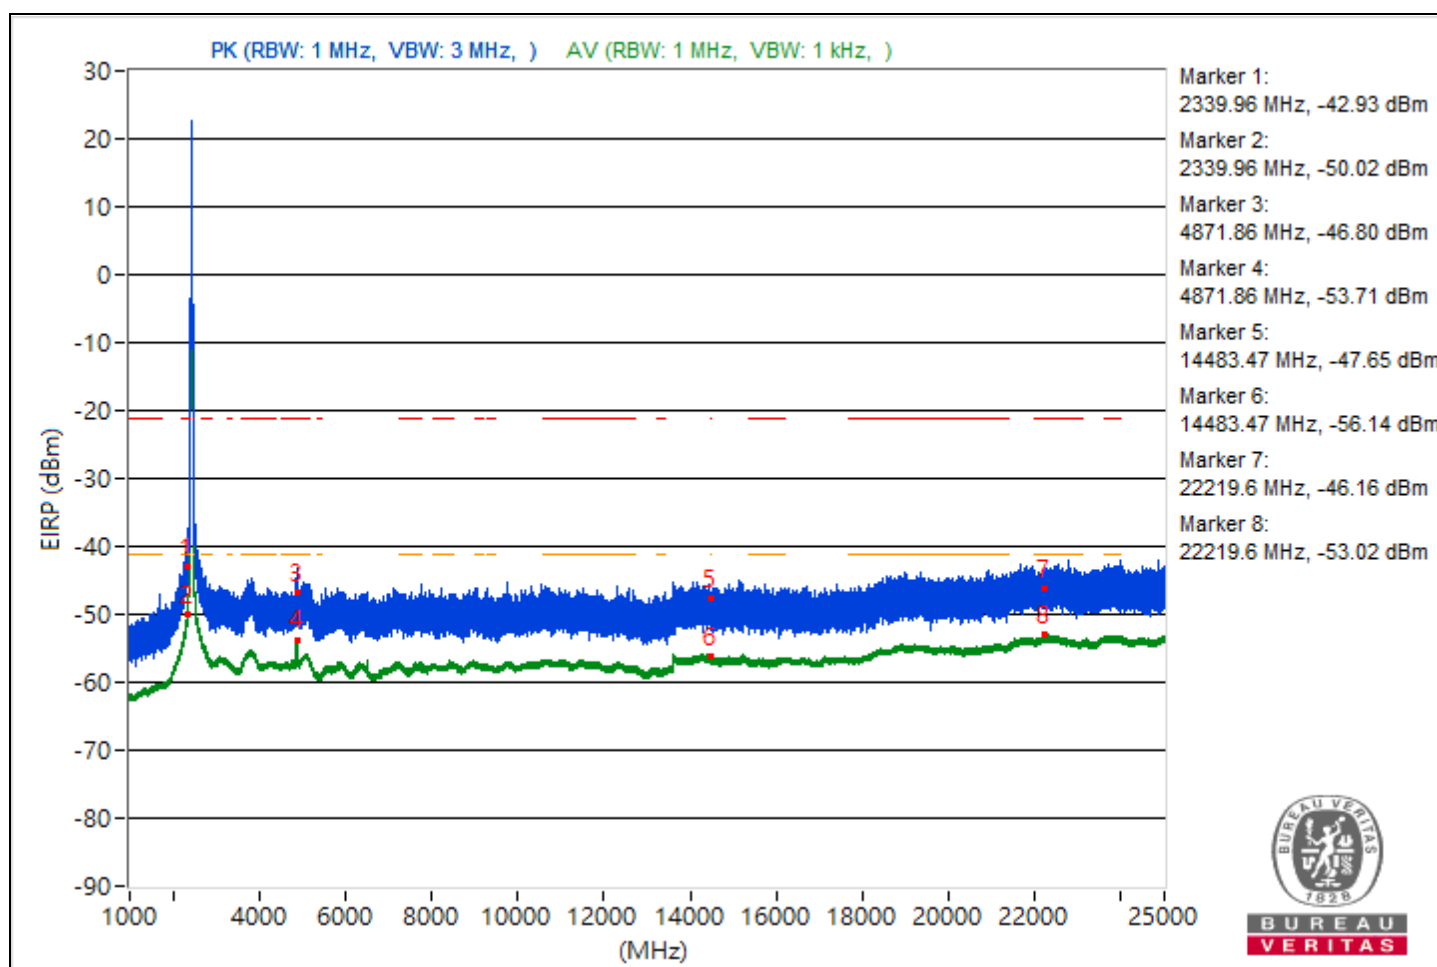

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.02	50.28 PK	74	-23.72	-55.8	-57.01	8.37	-44.98
2	2339.02	44.02 AV	54	-9.98	-62.63	-62.61	8.37	-51.24
3	2691.28	48.36 PK	74	-25.64	-58.51	-58.07	8.37	-46.9
4	2691.28	40.81 AV	54	-13.19	-65.25	-66.49	8.37	-54.45
5	14486.67	44.96 PK	74	-29.04	-60.73	-62.91	8.37	-50.3
6	14486.67	39 AV	54	-15	-67.39	-67.9	8.37	-56.26
7	23660.5	49.49 PK	74	-24.51	-57.16	-57.15	8.37	-45.77
8	23660.5	42.09 AV	54	-11.91	-64.95	-64.18	8.37	-53.17


Note: Margin value = Emission Level - Limit value

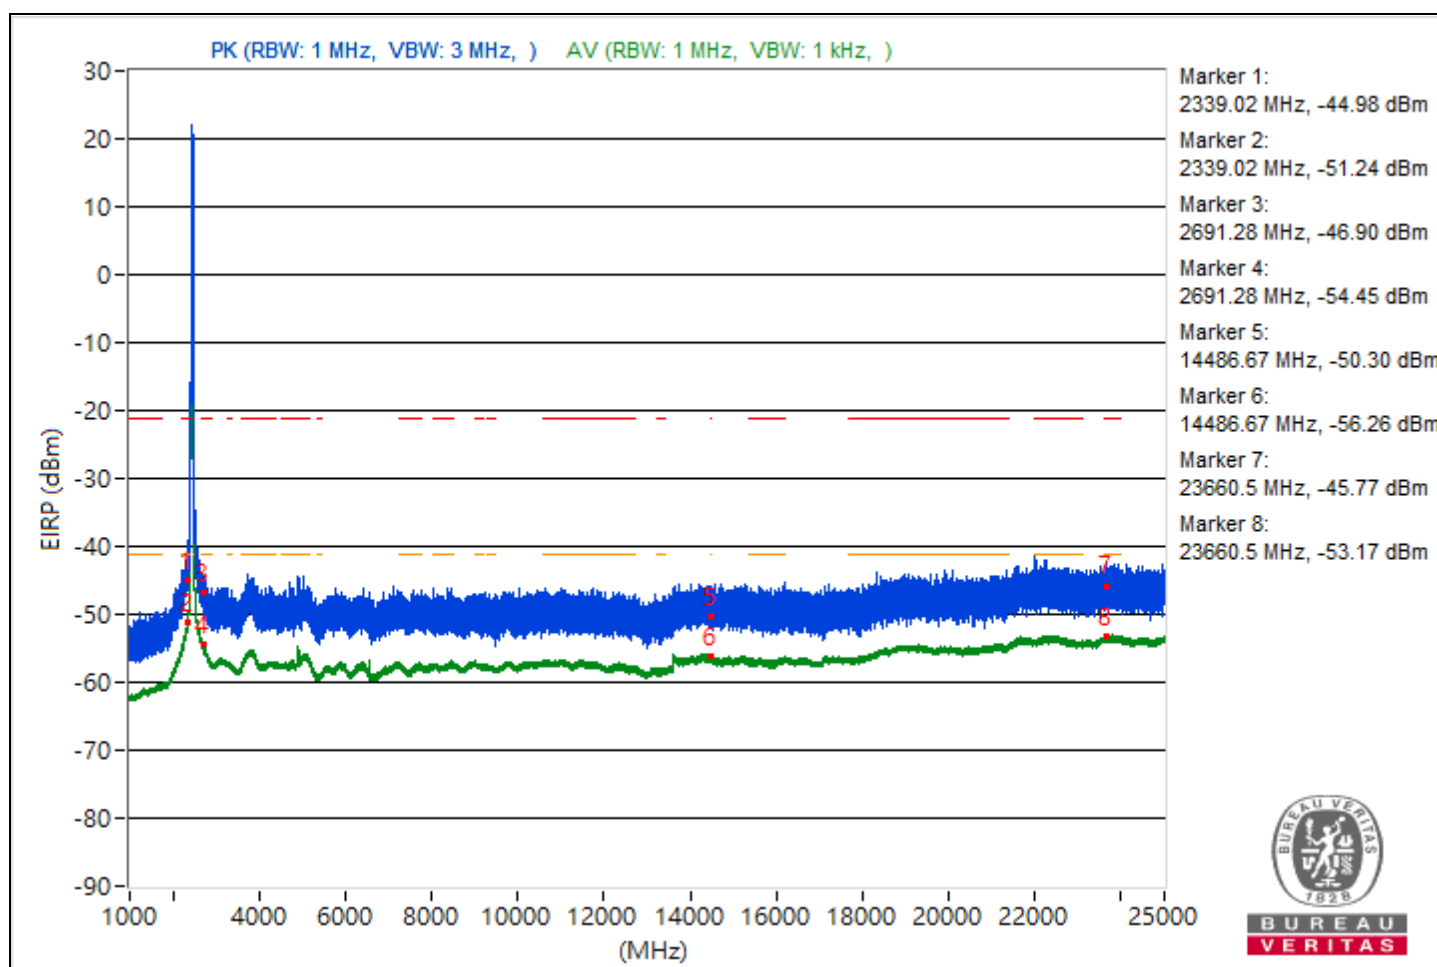

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.26	51.09 PK	74	-22.91	-54.32	-57.27	8.37	-44.17
2	2339.26	43.87 AV	54	-10.13	-62.62	-62.93	8.37	-51.39
3	2698.74	47.34 PK	74	-26.66	-59.34	-59.26	8.37	-47.92
4	2698.74	40.73 AV	54	-13.27	-65.56	-66.29	8.37	-54.53
5	14480.27	45.22 PK	74	-28.78	-62.7	-60.43	8.37	-50.04
6	14480.27	38.83 AV	54	-15.17	-68.22	-67.43	8.37	-56.43
7	22296.8	49.46 PK	74	-24.54	-57.83	-56.61	8.37	-45.8
8	22296.8	42.02 AV	54	-11.98	-64.94	-64.32	8.37	-53.24


Note: Margin value = Emission Level - Limit value

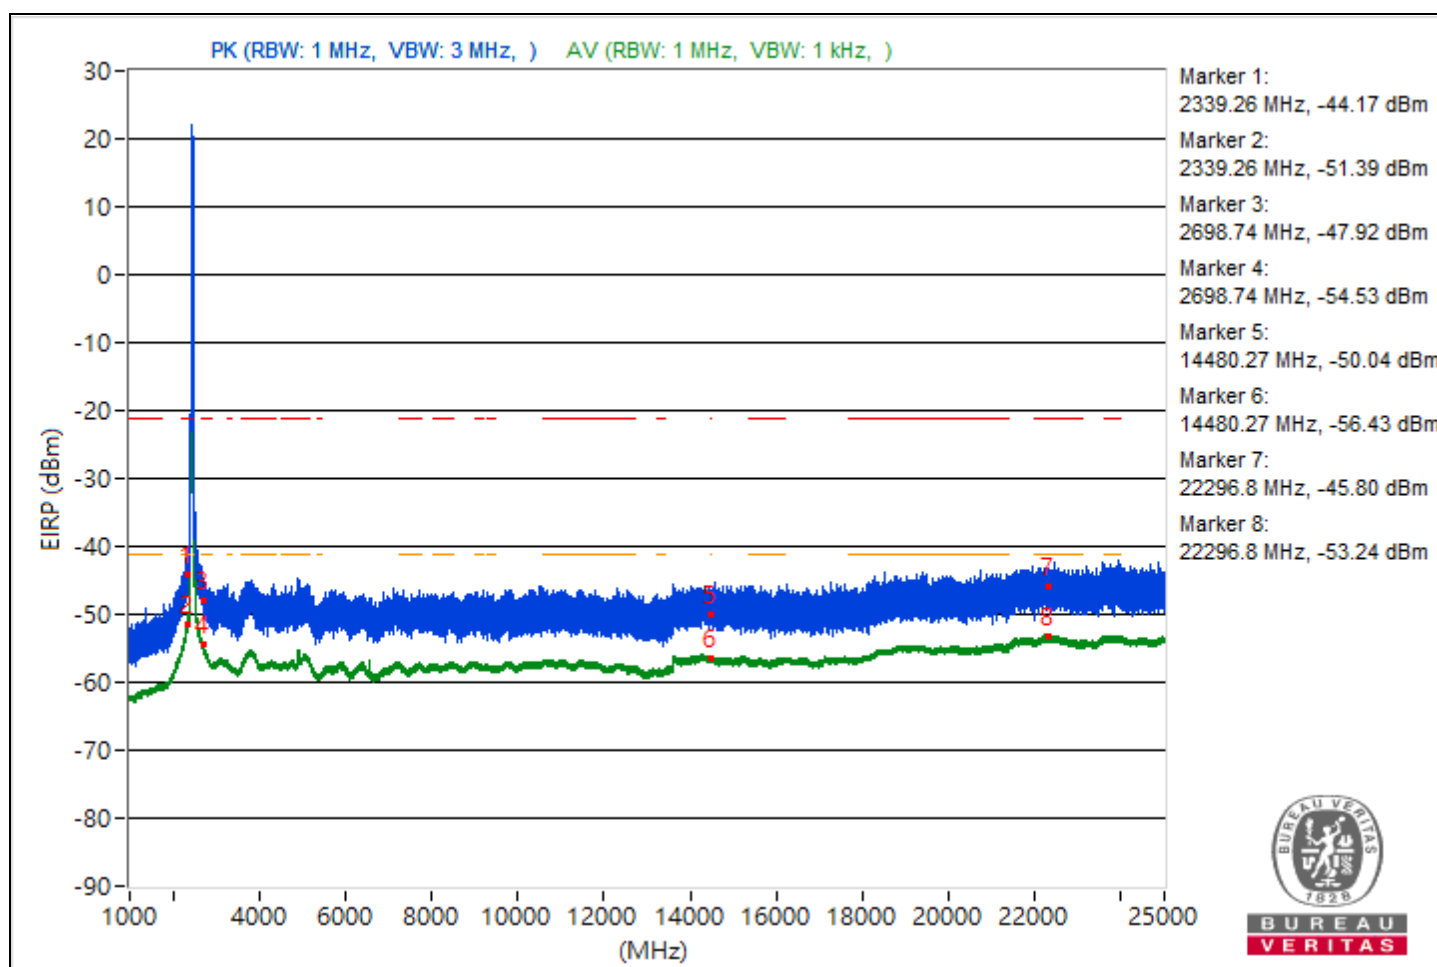

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.38	53.33 PK	74	-20.67	-53.5	-53.12	8.37	-41.93
2	2336.38	43.78 AV	54	-10.22	-62.57	-63.16	8.37	-51.48
3	2696.41	48.41 PK	74	-25.59	-60.46	-56.76	8.37	-46.85
4	2696.41	40.73 AV	54	-13.27	-65.61	-66.24	8.37	-54.53
5	14471.2	44.44 PK	74	-29.56	-62.49	-61.93	8.37	-50.82
6	14471.2	38.94 AV	54	-15.06	-68.06	-67.37	8.37	-56.32
7	23800.8	49.96 PK	74	-24.04	-55.57	-58.17	8.37	-45.3
8	23800.8	41.97 AV	54	-12.03	-65.14	-64.26	8.37	-53.29


Note: Margin value = Emission Level - Limit value

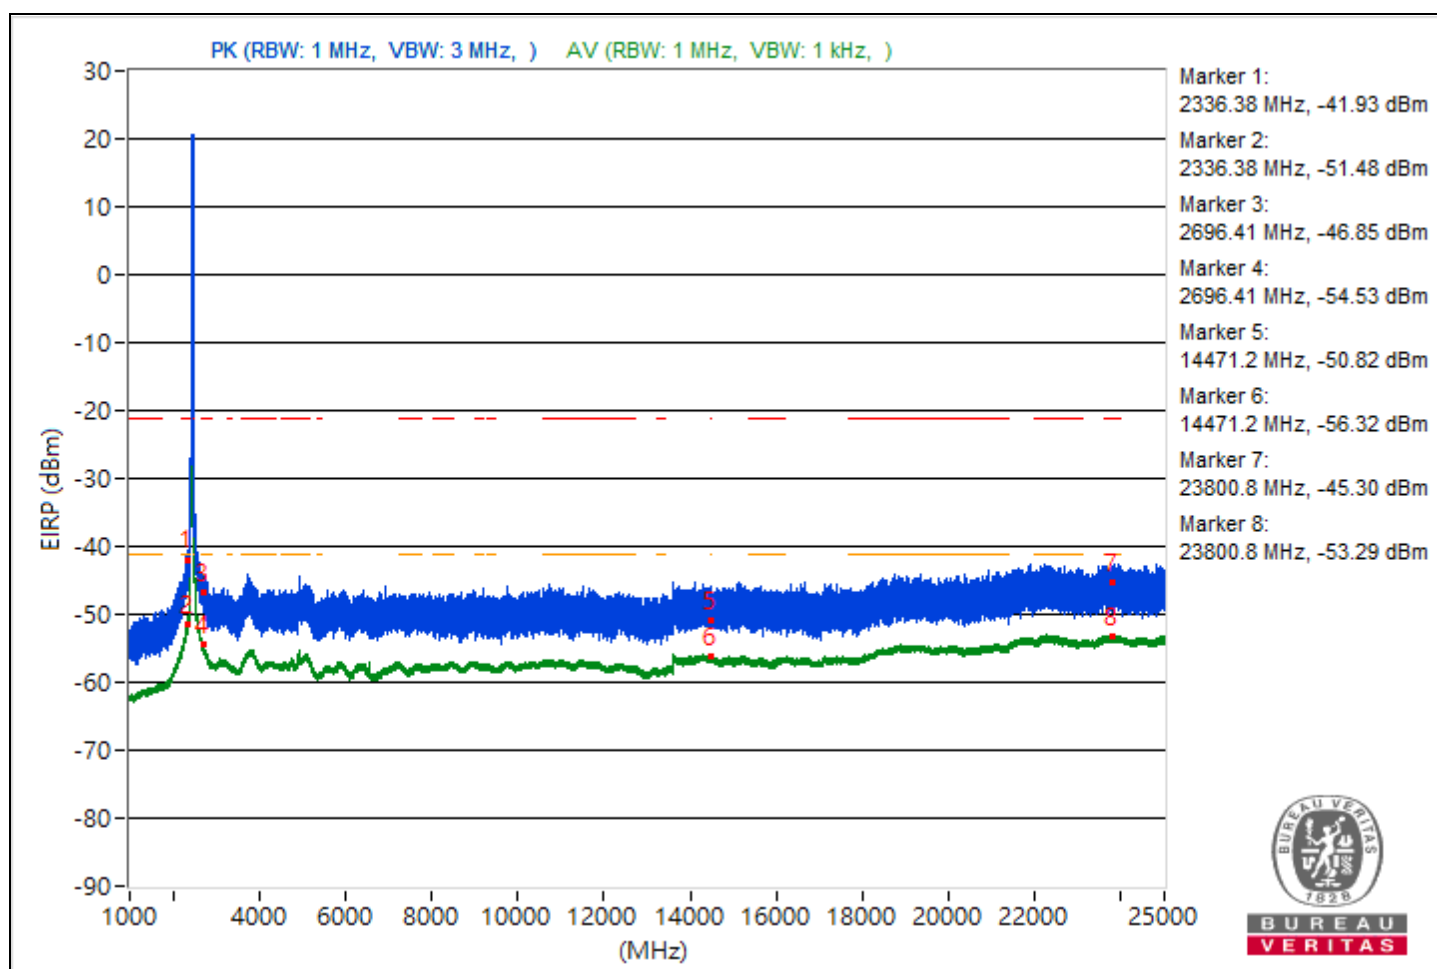

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2335.06	56.66 PK	74	-17.34	-50.13	-49.84	8.37	-38.6
2	2335.06	48.68 AV	54	-5.32	-58.1	-57.83	8.37	-46.58
3	3811.28	57.99 PK	74	-16.01	-49.04	-48.3	8.37	-37.27
4	3811.28	50.28 AV	54	-3.72	-56.17	-56.55	8.37	-44.98
5	14473.87	56.31 PK	74	-17.69	-50.88	-49.85	8.37	-38.95
6	14473.87	49.2 AV	54	-4.8	-57.89	-57.03	8.37	-46.06
7	22286.9	58.77 PK	74	-15.23	-47.63	-48.12	8.37	-36.49
8	22286.9	52.52 AV	54	-1.48	-53.69	-54.6	8.37	-42.74


Note: Margin value = Emission Level - Limit value

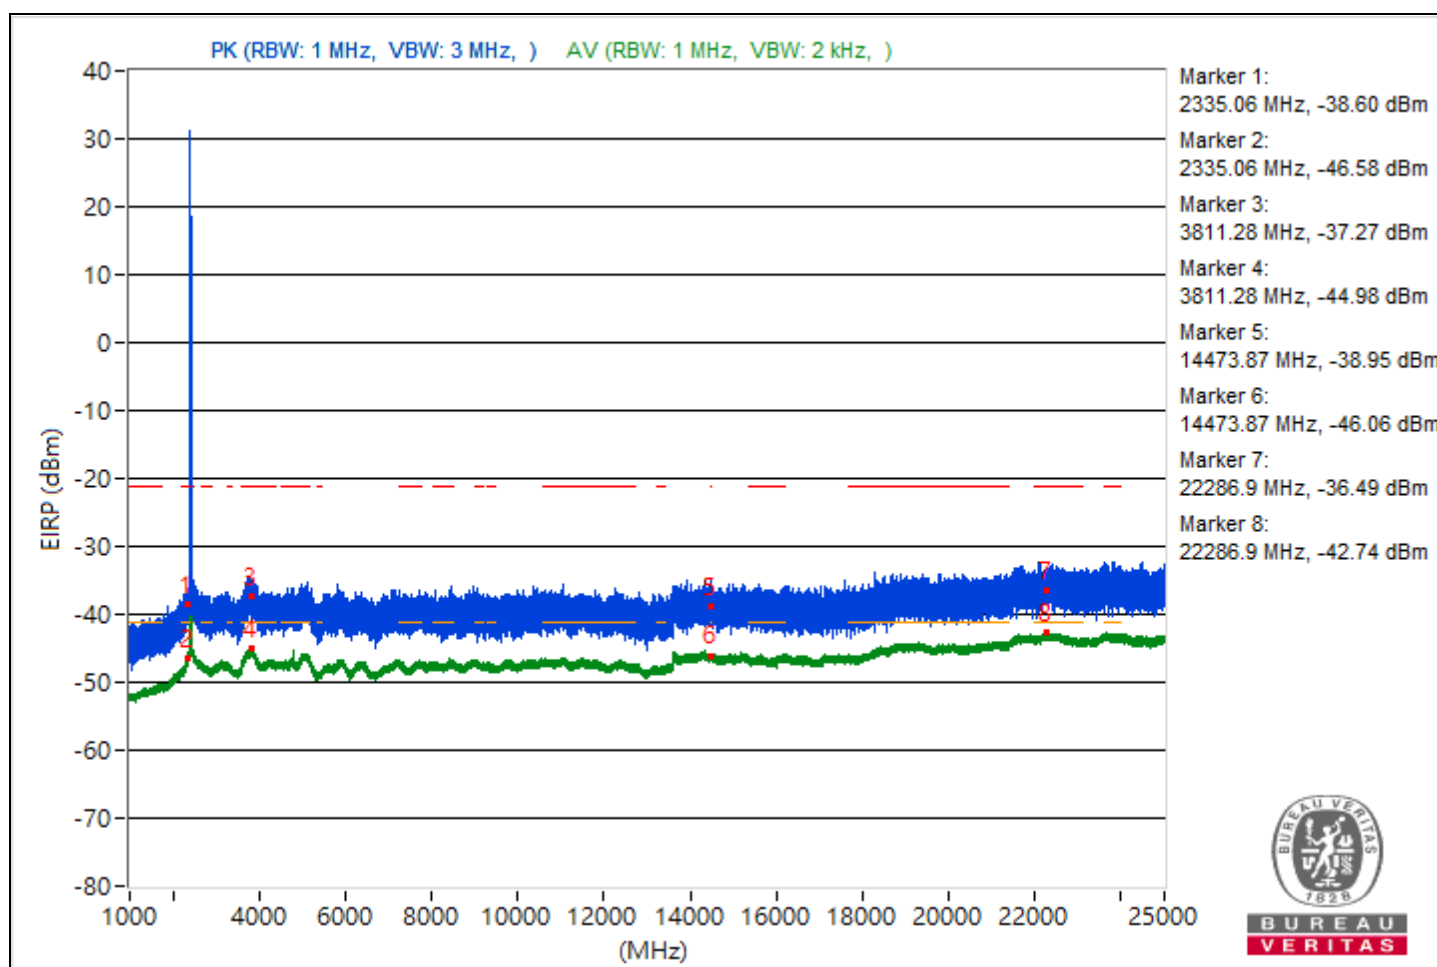

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2331.17	56.27 PK	74	-17.73	-50.51	-50.22	8.37	-38.99
2	2331.17	49.15 AV	54	-4.85	-57.4	-57.57	8.37	-46.11
3	4856.77	61.7 PK	74	-12.3	-47.6	-43.31	8.37	-33.56
4	4856.77	53.34 AV	54	-0.66	-57.62	-51.18	8.37	-41.92
5	14483.29	56.18 PK	74	-17.82	-50.34	-50.58	8.37	-39.08
6	14483.29	49.08 AV	54	-4.92	-57.05	-58.14	8.37	-46.18
7	22235.5	58.87 PK	74	-15.13	-46.02	-50.78	8.37	-36.39
8	22235.5	52.35 AV	54	-1.65	-55	-53.68	8.37	-42.91


Note: Margin value = Emission Level - Limit value

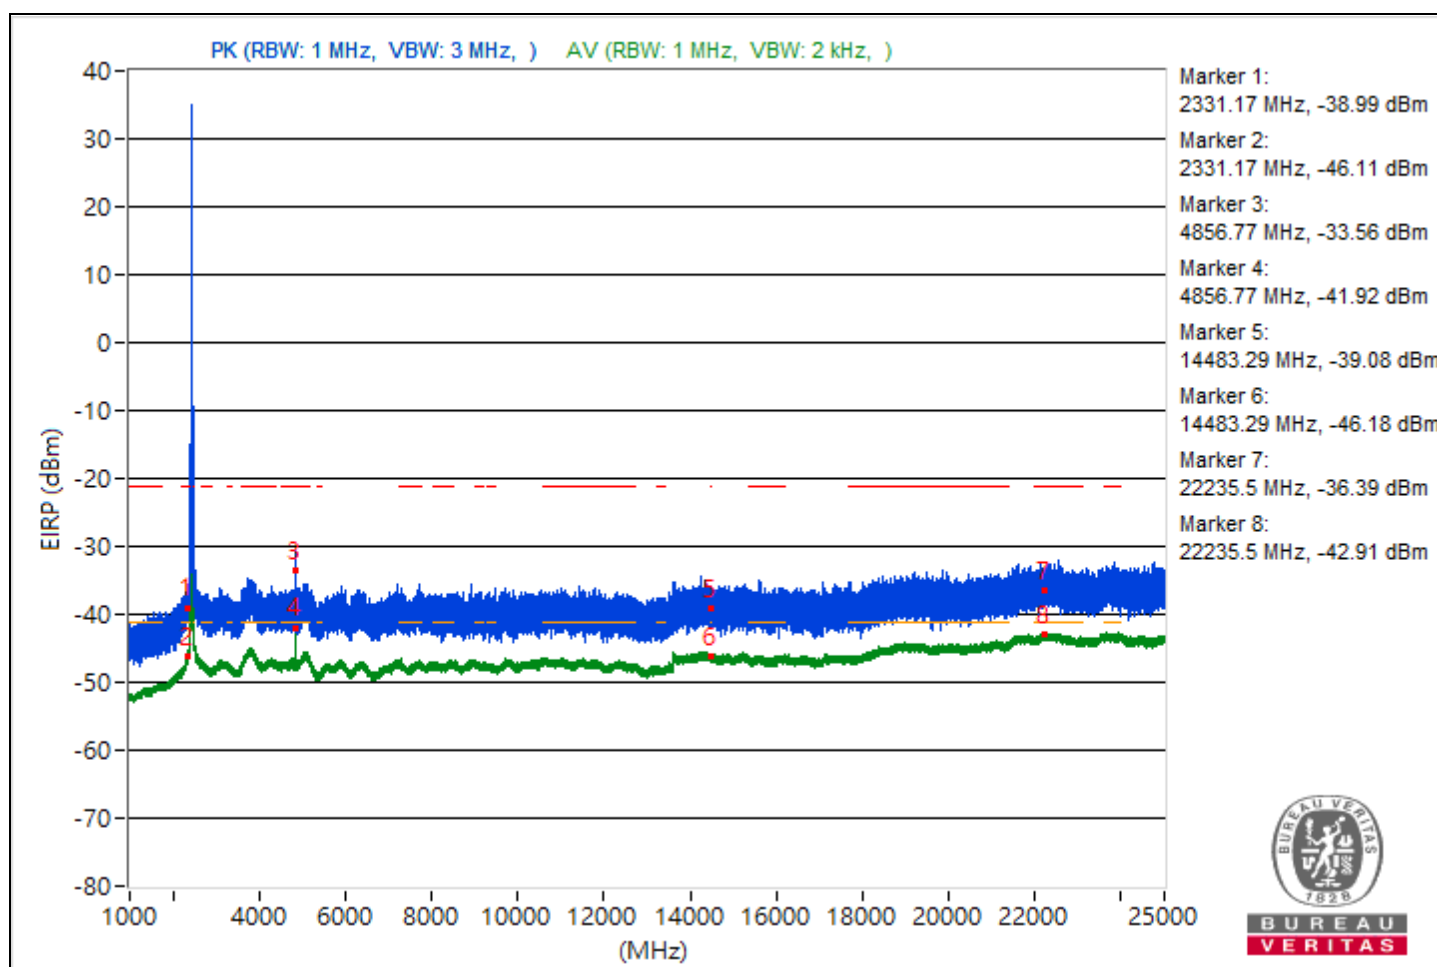

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.4	56.01 PK	74	-17.99	-50.04	-51.3	8.37	-39.25
2	2338.4	48.2 AV	54	-5.8	-58.11	-58.81	8.37	-47.06
3	4941.16	58.88 PK	74	-15.12	-51.92	-45.67	8.37	-36.38
4	4941.16	50.49 AV	54	-3.51	-58.59	-54.6	8.37	-44.77
5	15612.8	56.25 PK	74	-17.75	-53.06	-48.75	8.37	-39.01
6	15612.8	49.05 AV	54	-4.95	-58.32	-56.97	8.37	-46.21
7	22296.1	59.29 PK	74	-14.71	-48.18	-46.65	8.37	-35.97
8	22296.1	52.49 AV	54	-1.51	-54.56	-53.79	8.37	-42.77


Note: Margin value = Emission Level - Limit value

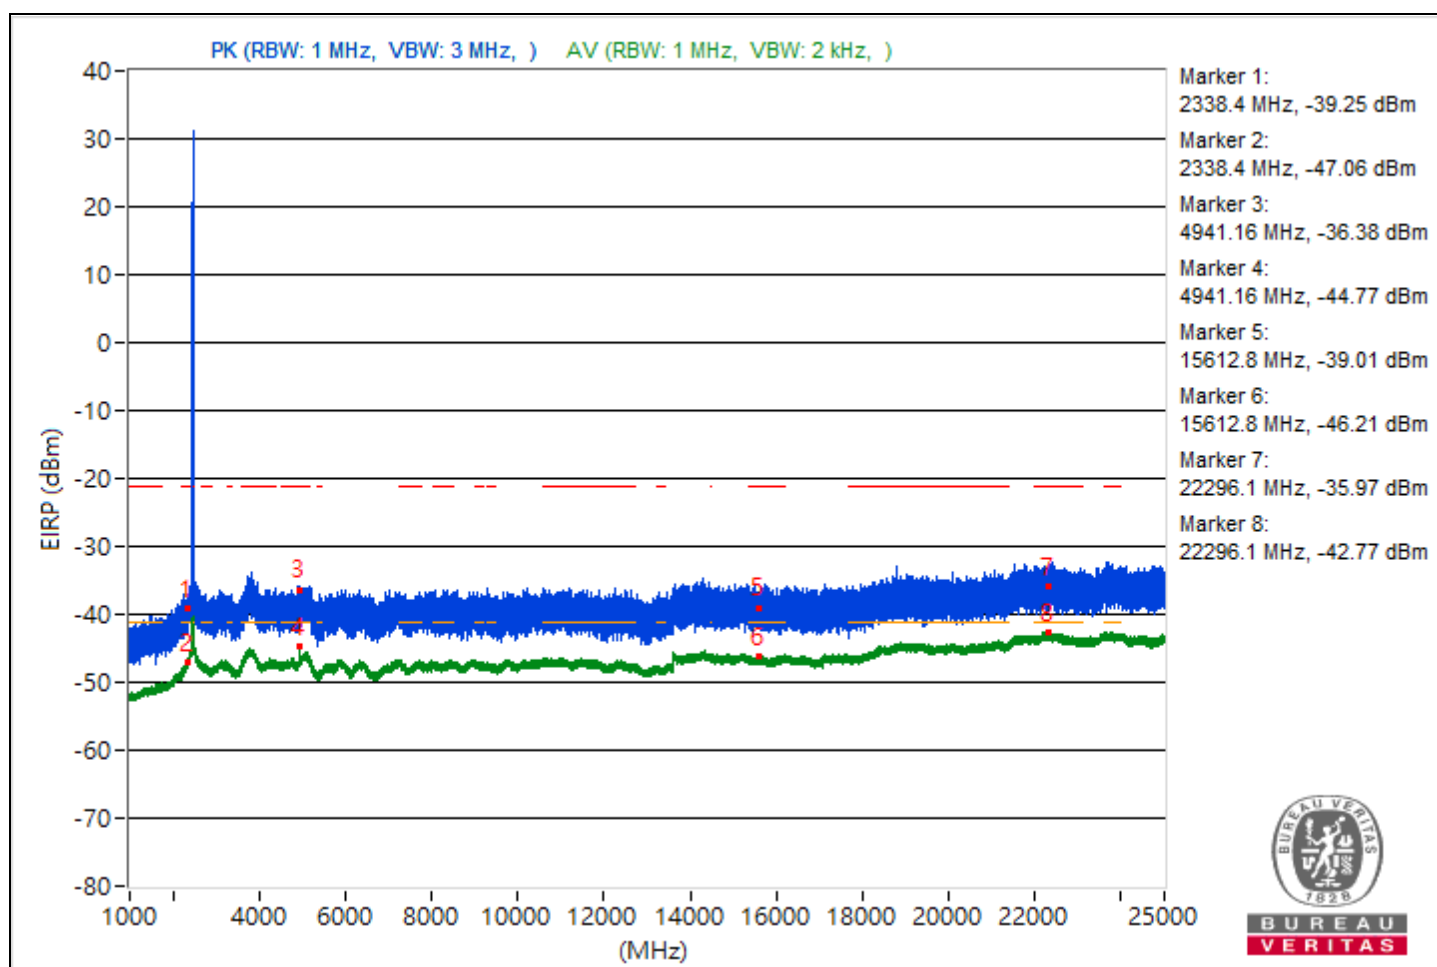

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2333.27	56.11 PK	74	-17.89	-50.01	-51.13	8.37	-39.15
2	2333.27	48.42 AV	54	-5.58	-57.96	-58.49	8.37	-46.84
3	3766.01	57.47 PK	74	-16.53	-48.17	-50.47	8.37	-37.79
4	3766.01	50.14 AV	54	-3.86	-56.23	-56.78	8.37	-45.12
5	14475.38	56.71 PK	74	-17.29	-50.88	-49.16	8.37	-38.55
6	14475.38	49.29 AV	54	-4.71	-57.06	-57.67	8.37	-45.97
7	22234.9	60.68 PK	74	-13.32	-45.95	-45.98	8.37	-34.58
8	22234.9	52.47 AV	54	-1.53	-54.6	-53.78	8.37	-42.79


Note: Margin value = Emission Level - Limit value

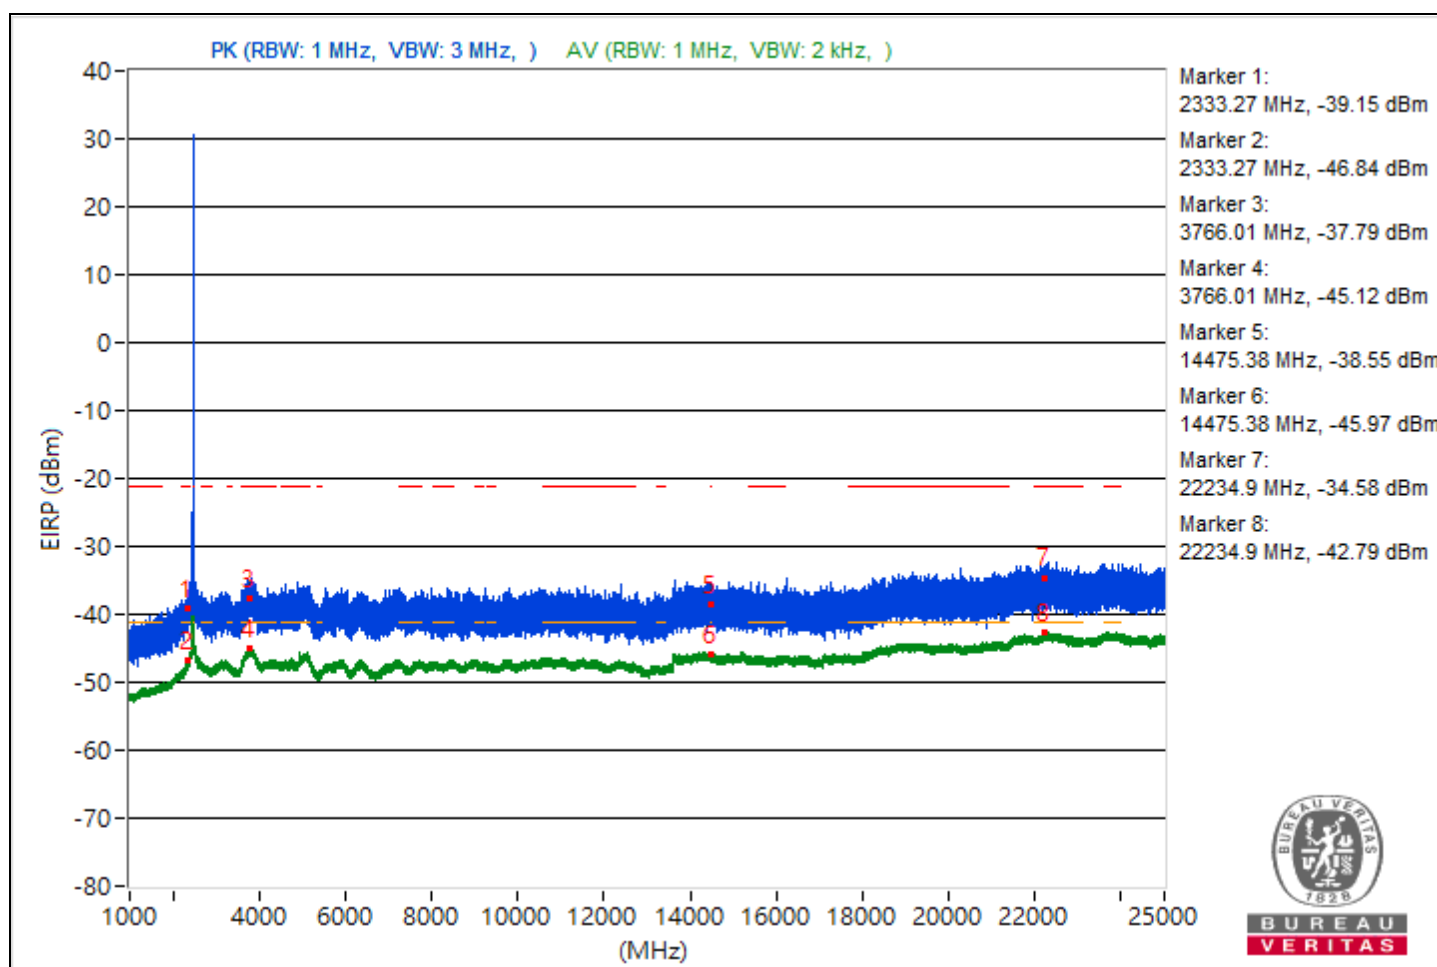

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	23°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2334.36	54.38 PK	74	-19.62	-51.75	-52.85	8.37	-40.88
2	2334.36	47.53 AV	54	-6.47	-59.39	-58.84	8.37	-47.73
3	3802.26	59.07 PK	74	-14.93	-47.3	-47.85	8.37	-36.19
4	3802.26	52.31 AV	54	-1.69	-54.66	-54.02	8.37	-42.95
5	14489.33	57.72 PK	74	-16.28	-47.28	-51.59	8.37	-37.54
6	14489.33	49.93 AV	54	-4.07	-56.43	-57	8.37	-45.33
7	23871.4	61.64 PK	74	-12.36	-43.02	-48.74	8.37	-33.62
8	23871.4	53.78 AV	54	-0.22	-52.39	-53.39	8.37	-41.48


Note: Margin value = Emission Level - Limit value

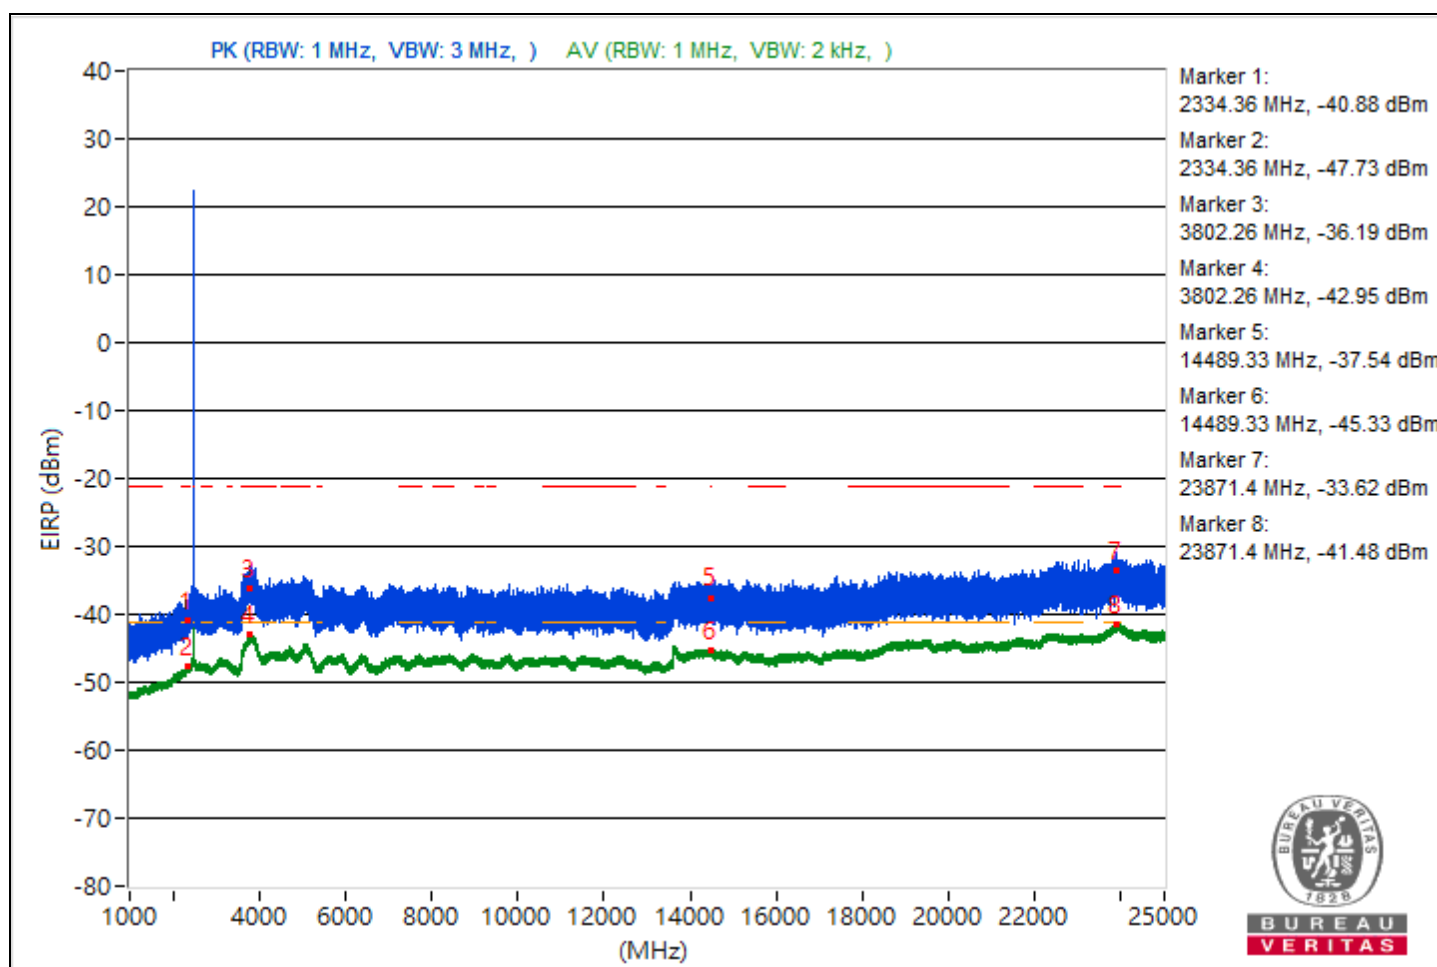

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.01	57.91 PK	74	-16.09	-47.93	-49.71	8.37	-37.35
2	2338.01	48.65 AV	54	-5.35	-57.84	-58.15	8.37	-46.61
3	3837.26	58.23 PK	74	-15.77	-47.87	-49.04	8.37	-37.03
4	3837.26	50.02 AV	54	-3.98	-56.94	-56.32	8.37	-45.24
5	14491.91	55.82 PK	74	-18.18	-50.29	-51.42	8.37	-39.44
6	14491.91	49.07 AV	54	-4.93	-57.95	-57.23	8.37	-46.19
7	23650.4	59.87 PK	74	-14.13	-45.53	-48.51	8.37	-35.39
8	23650.4	52.22 AV	54	-1.78	-54.07	-54.81	8.37	-43.04


Note: Margin value = Emission Level - Limit value

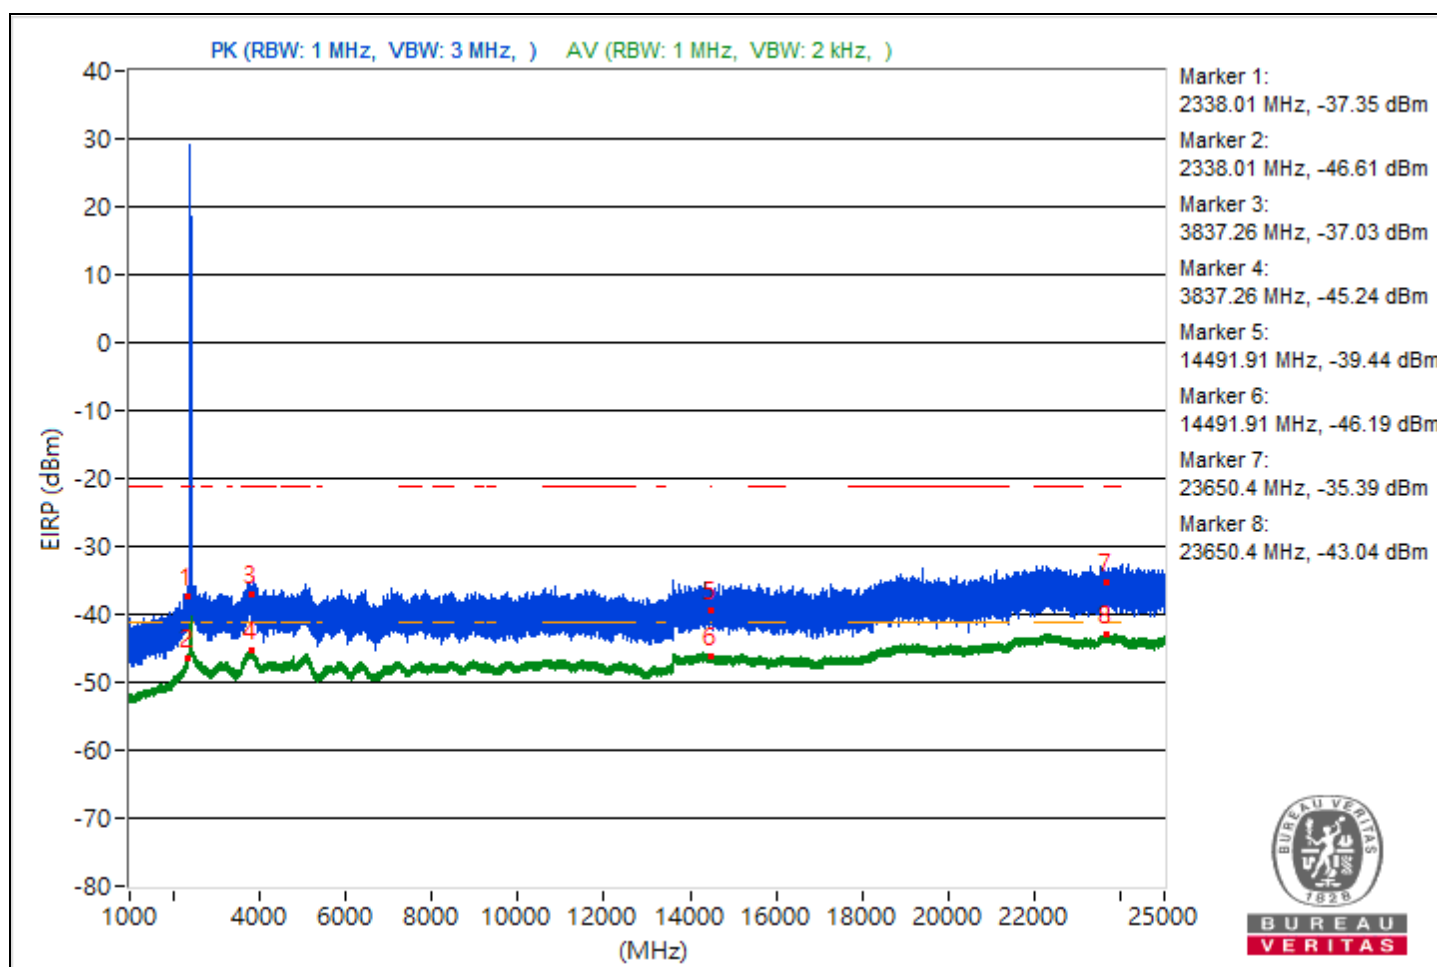

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.96	55.47 PK	74	-18.53	-51.17	-51.17	8.37	-39.79
2	2339.96	48.96 AV	54	-5.04	-57.28	-58.12	8.37	-46.3
3	4858.63	59.79 PK	74	-14.21	-52.84	-44.42	8.37	-35.47
4	4858.63	51.78 AV	54	-2.22	-57.99	-53.06	8.37	-43.48
5	14480.8	57.04 PK	74	-16.96	-51.54	-48.27	8.37	-38.22
6	14480.8	49.07 AV	54	-4.93	-57.89	-57.27	8.37	-46.19
7	22313.5	60.27 PK	74	-13.73	-46.71	-46.05	8.37	-34.99
8	22313.5	52.14 AV	54	-1.86	-54.04	-55.01	8.37	-43.12


Note: Margin value = Emission Level - Limit value

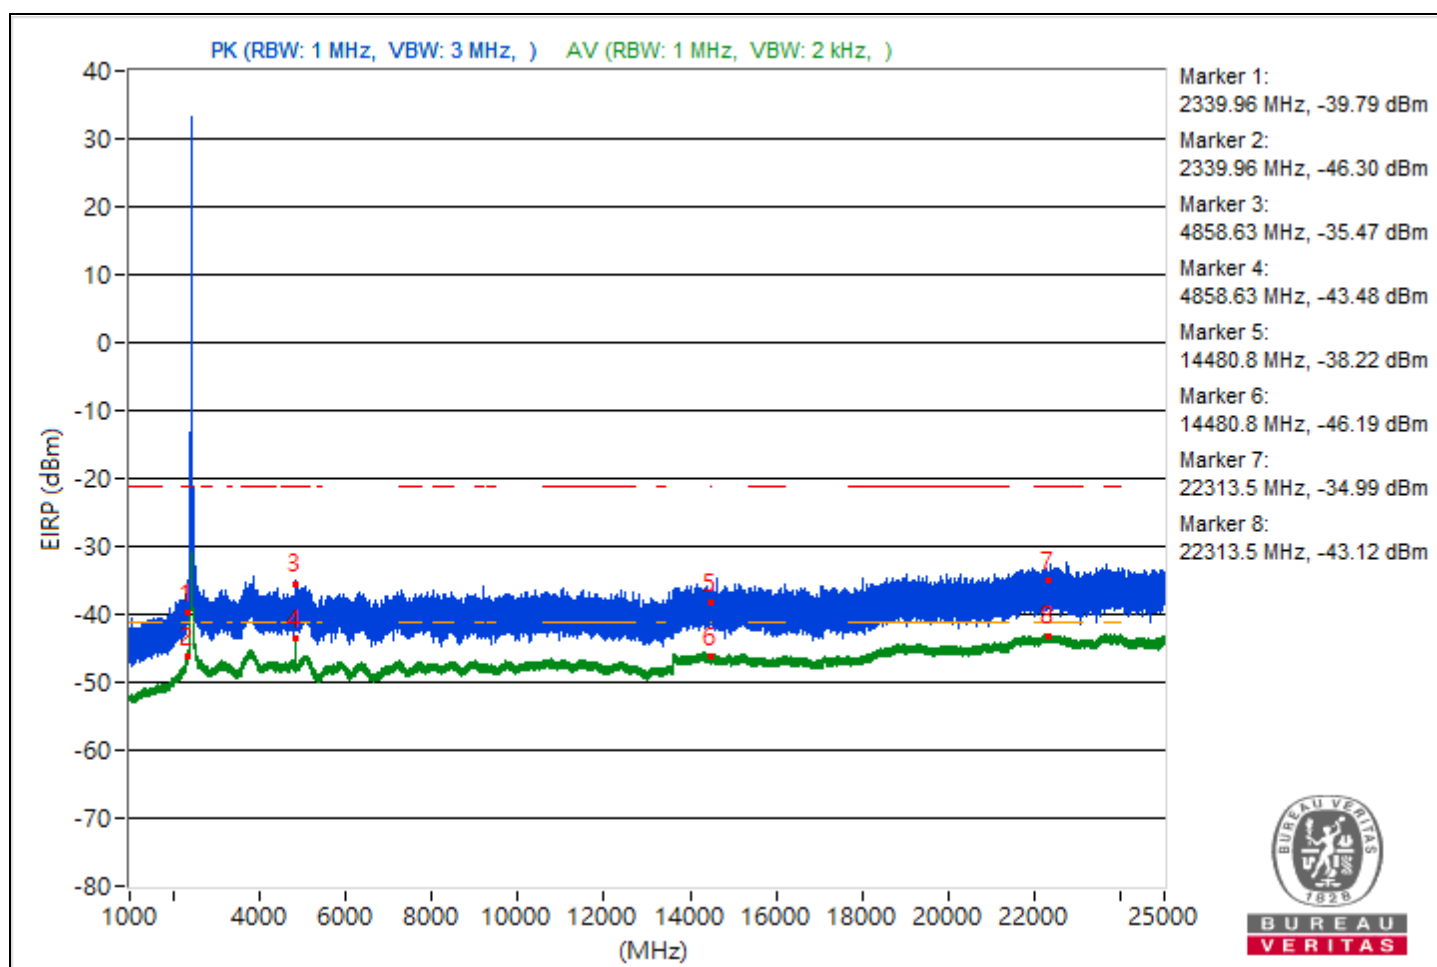

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.88	57.32 PK	74	-16.68	-49.1	-49.55	8.37	-37.94
2	2339.88	48.03 AV	54	-5.97	-58.13	-59.14	8.37	-47.23
3	3822.79	58 PK	74	-16	-48.63	-48.66	8.37	-37.26
4	3822.79	49.82 AV	54	-4.18	-57.37	-56.34	8.37	-45.44
5	15613.07	57.58 PK	74	-16.42	-49.11	-49	8.37	-37.68
6	15613.07	48.97 AV	54	-5.03	-58.13	-57.25	8.37	-46.29
7	22183.1	58.66 PK	74	-15.34	-48.06	-47.9	8.37	-36.6
8	22183.1	52.09 AV	54	-1.91	-55.18	-53.99	8.37	-43.17


Note: Margin value = Emission Level - Limit value

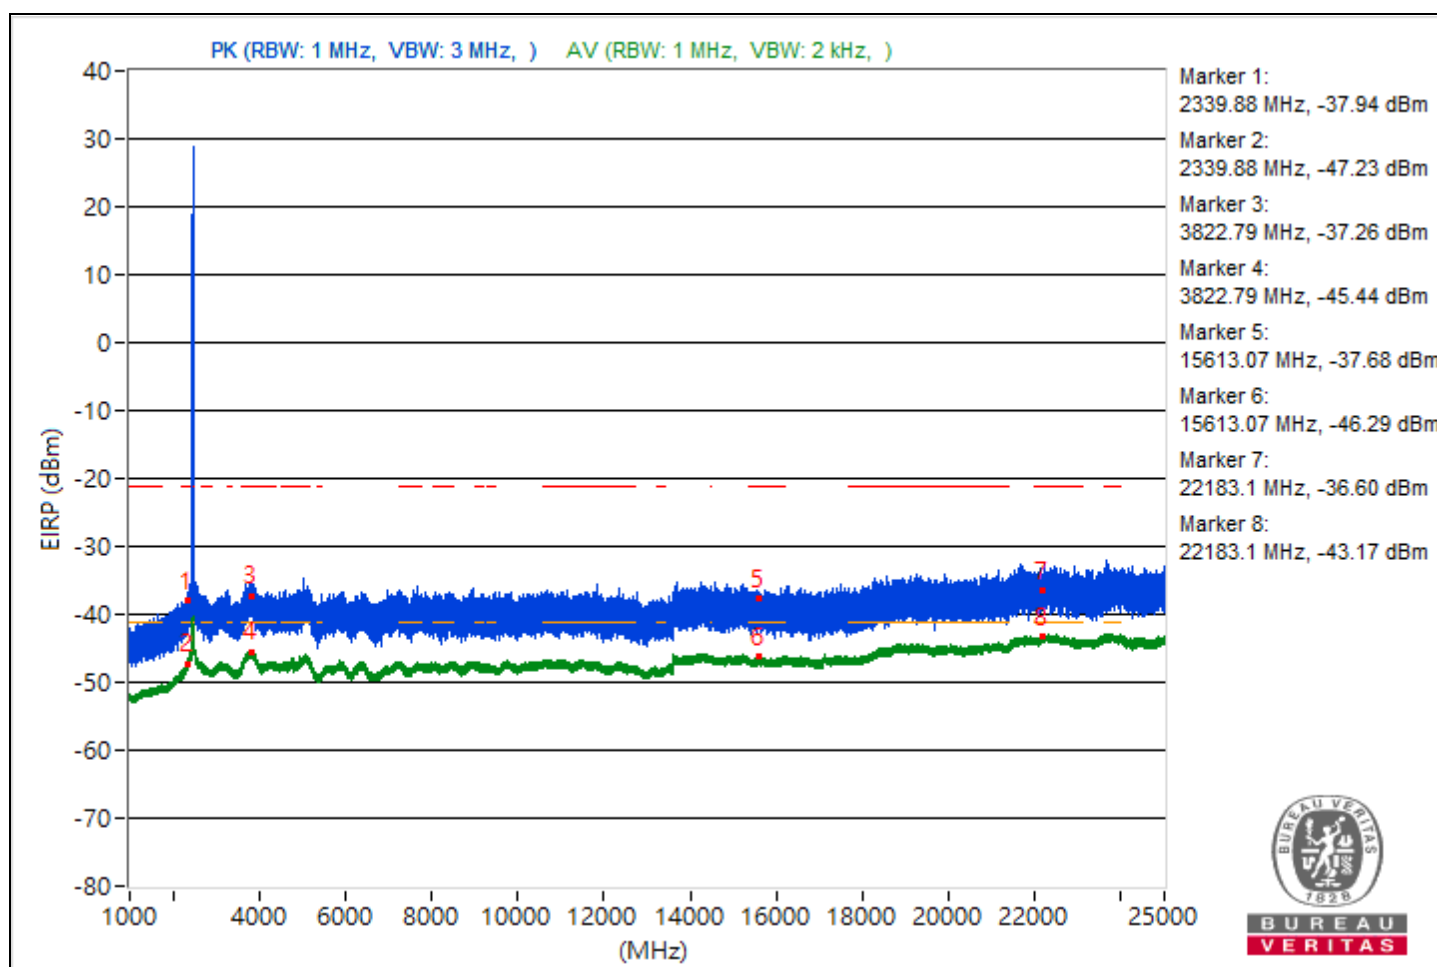

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.84	55.28 PK	74	-18.72	-50.99	-51.75	8.37	-39.98
2	2336.84	47.89 AV	54	-6.11	-58.22	-59.36	8.37	-47.37
3	3788.33	57.17 PK	74	-16.83	-49.66	-49.29	8.37	-38.09
4	3788.33	49.85 AV	54	-4.15	-57.34	-56.3	8.37	-45.41
5	14479.73	56.01 PK	74	-17.99	-49.37	-52.42	8.37	-39.25
6	14479.73	49.07 AV	54	-4.93	-57.18	-57.99	8.37	-46.19
7	23842.8	58.23 PK	74	-15.77	-48.85	-48.02	8.37	-37.03
8	23842.8	52.35 AV	54	-1.65	-54.71	-53.9	8.37	-42.91


Note: Margin value = Emission Level - Limit value

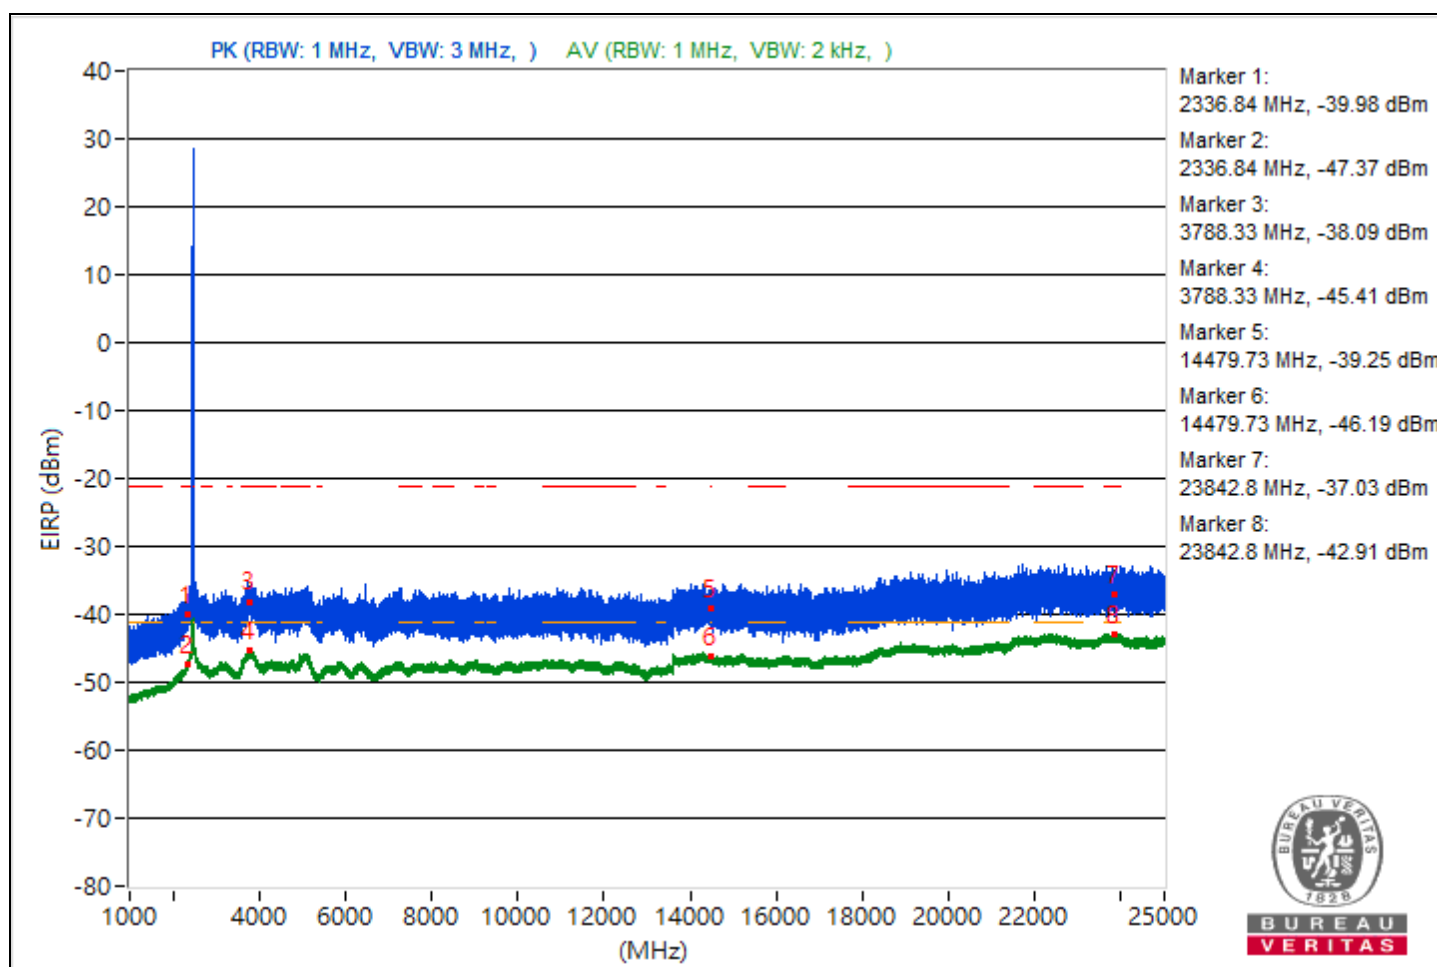

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	23°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.49	55.12 PK	74	-18.88	-50.97	-52.14	8.37	-40.14
2	2339.49	47.46 AV	54	-6.54	-58.72	-59.7	8.37	-47.8
3	3801.17	58.45 PK	74	-15.55	-48.44	-47.95	8.37	-36.81
4	3801.17	52.4 AV	54	-1.6	-54.12	-54.36	8.37	-42.86
5	14494.13	54.95 PK	74	-19.05	-52.1	-51.31	8.37	-40.31
6	14494.13	50.24 AV	54	-3.76	-56.57	-56.23	8.37	-45.02
7	23834.4	61.86 PK	74	-12.14	-44.52	-45.05	8.37	-33.4
8	23834.4	53.59 AV	54	-0.41	-53.51	-52.63	8.37	-41.67


Note: Margin value = Emission Level - Limit value

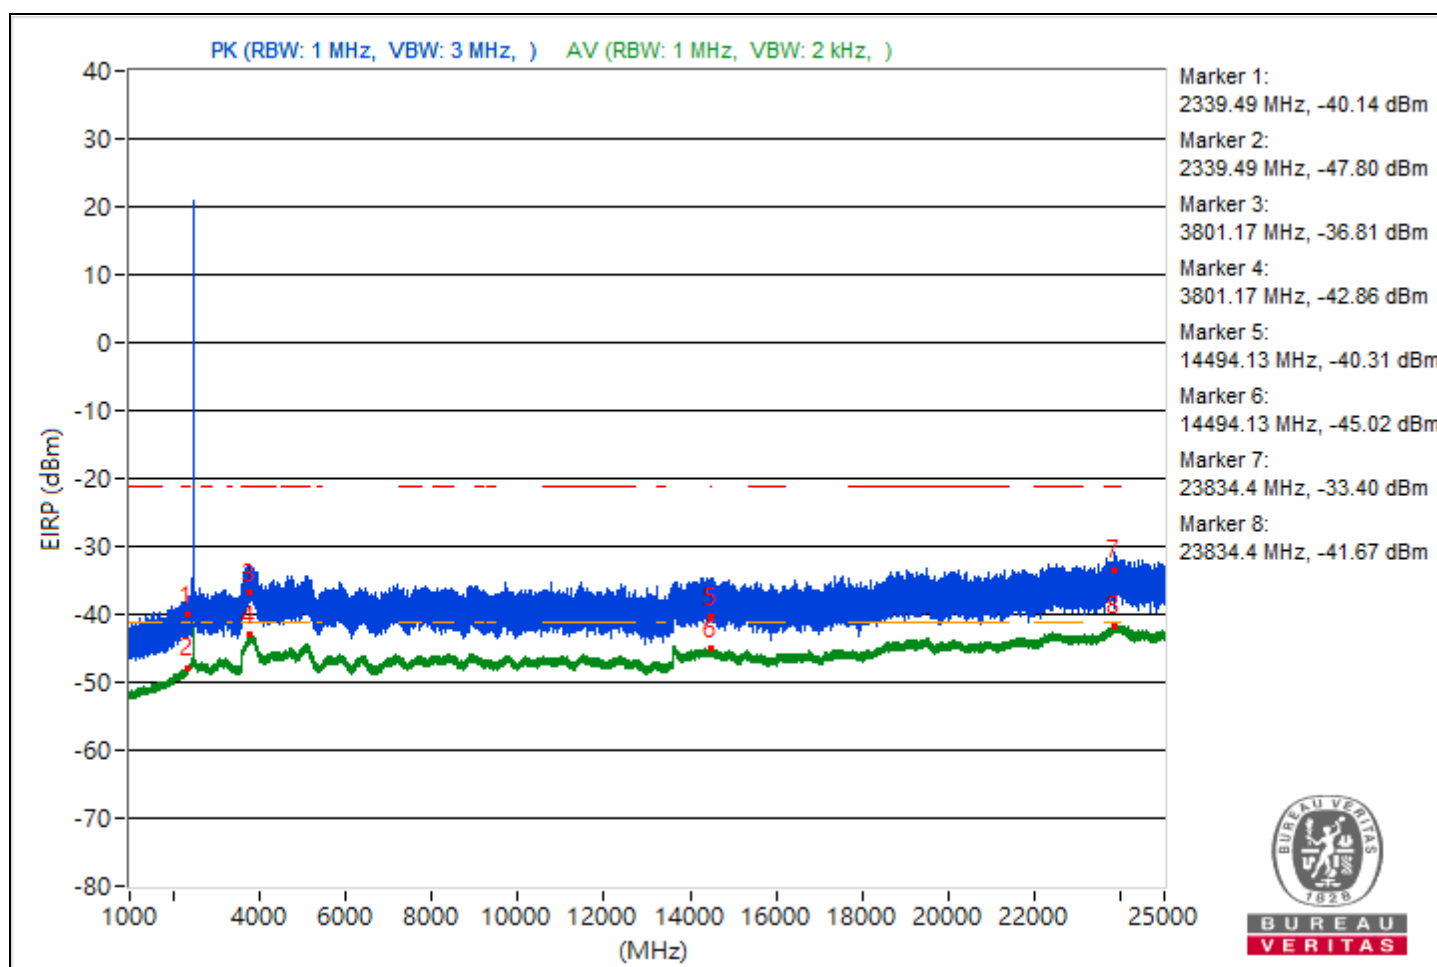

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.33	54.93 PK	74	-19.07	-50.95	-52.62	8.37	-40.33
2	2339.33	48.77 AV	54	-5.23	-57.38	-58.43	8.37	-46.49
3	3828.16	57.99 PK	74	-16.01	-48.12	-49.25	8.37	-37.27
4	3828.16	50.05 AV	54	-3.95	-56.89	-56.31	8.37	-45.21
5	14492.89	56.76 PK	74	-17.24	-50.78	-49.13	8.37	-38.5
6	14492.89	49.16 AV	54	-4.84	-57.19	-57.8	8.37	-46.1
7	22220.9	58.45 PK	74	-15.55	-48.62	-47.8	8.37	-36.81
8	22220.9	52.21 AV	54	-1.79	-53.99	-54.92	8.37	-43.05


Note: Margin value = Emission Level - Limit value

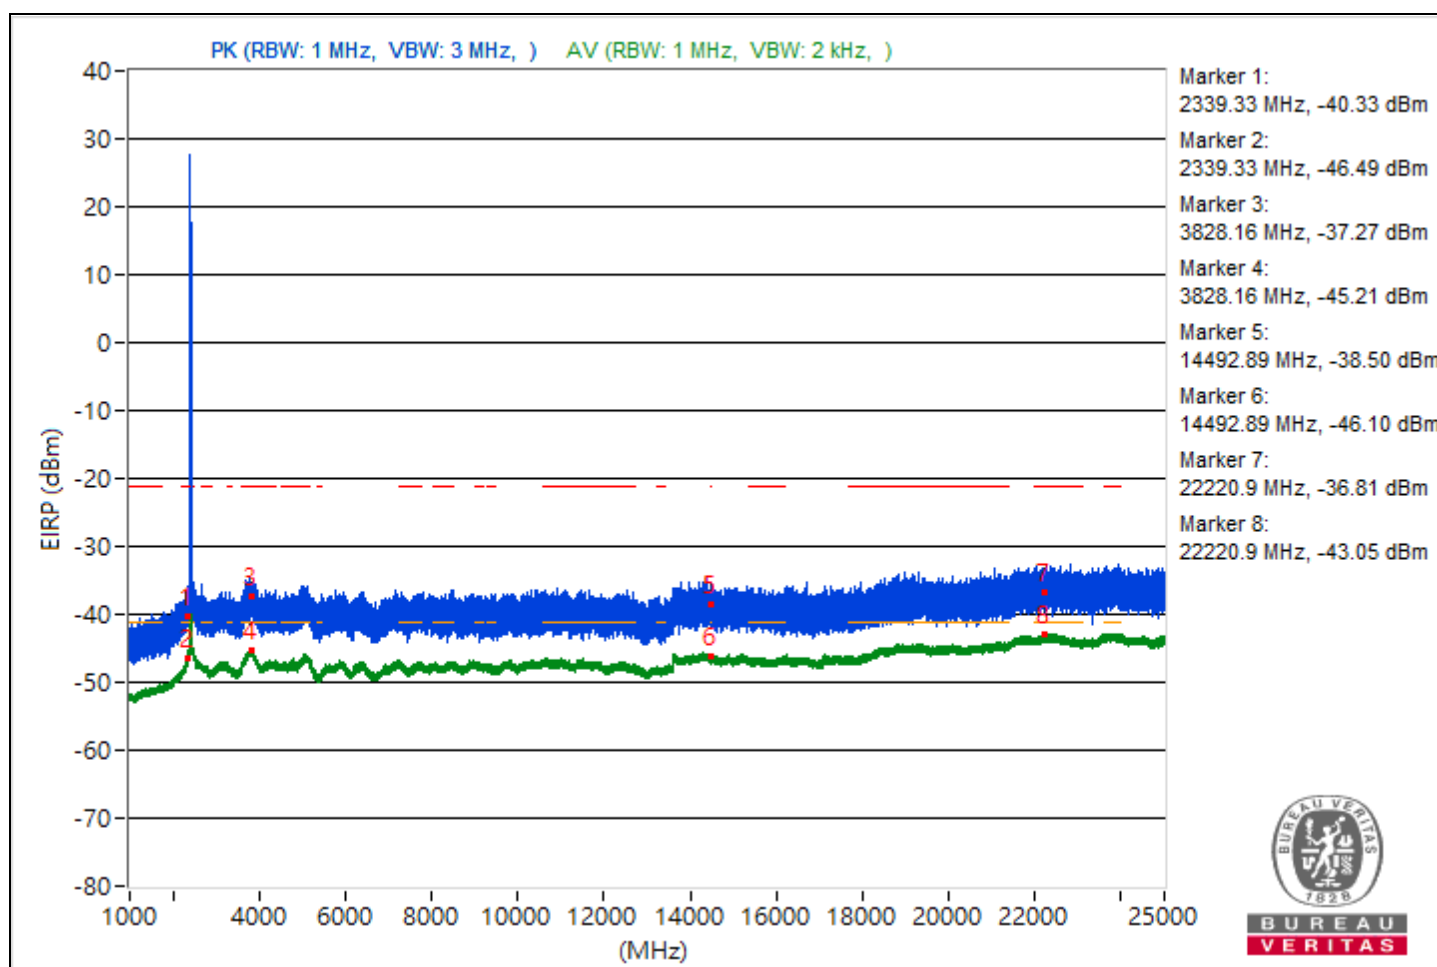

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.64	58.44 PK	74	-15.56	-48.73	-47.72	8.37	-36.82
2	2339.64	49.45 AV	54	-4.55	-56.85	-57.55	8.37	-45.81
3	3796.27	57.09 PK	74	-16.91	-49.7	-49.41	8.37	-38.17
4	3796.27	50.07 AV	54	-3.93	-56.34	-56.81	8.37	-45.19
5	14477.87	57.23 PK	74	-16.77	-47.95	-51.63	8.37	-38.03
6	14477.87	48.86 AV	54	-5.14	-57.37	-58.23	8.37	-46.4
7	23817	57.5 PK	74	-16.5	-48.81	-49.49	8.37	-37.76
8	23817	52.24 AV	54	-1.76	-53.72	-55.22	8.37	-43.02


Note: Margin value = Emission Level - Limit value

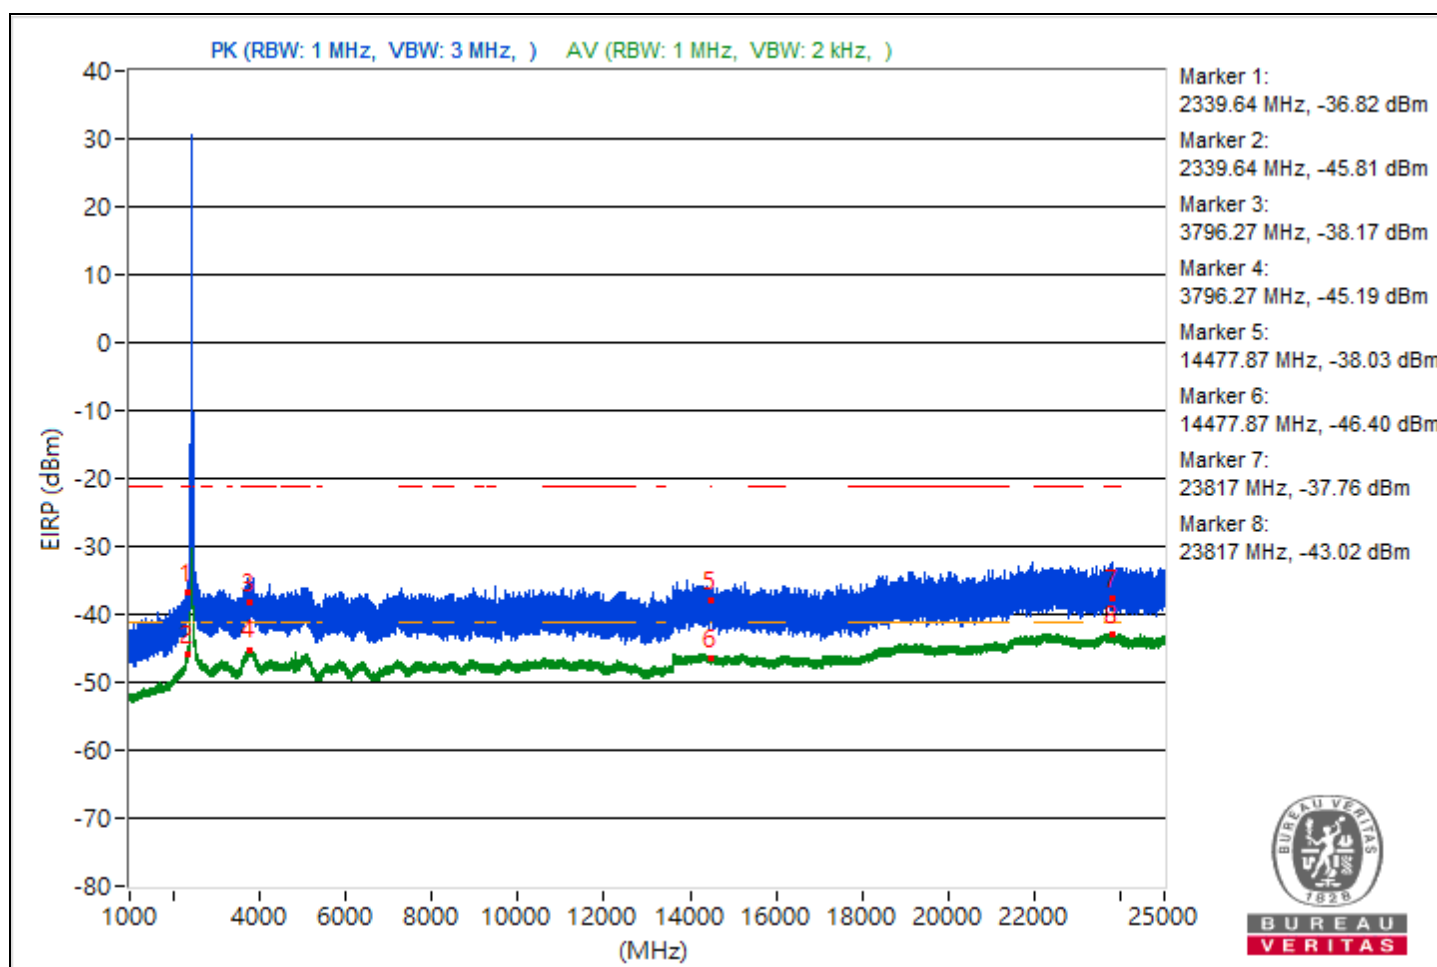

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2326.66	55.24 PK	74	-18.76	-52.32	-50.65	8.37	-40.02
2	2326.66	48.27 AV	54	-5.73	-58.12	-58.64	8.37	-46.99
3	3804.51	56.46 PK	74	-17.54	-50.18	-50.18	8.37	-38.8
4	3804.51	50.13 AV	54	-3.87	-57.06	-56.02	8.37	-45.13
5	14486.22	57.29 PK	74	-16.71	-48.95	-49.78	8.37	-37.97
6	14486.22	49.2 AV	54	-4.8	-57.14	-57.77	8.37	-46.06
7	23863.1	58.55 PK	74	-15.45	-47.7	-48.51	8.37	-36.71
8	23863.1	52.36 AV	54	-1.64	-53.89	-54.69	8.37	-42.9


Note: Margin value = Emission Level - Limit value

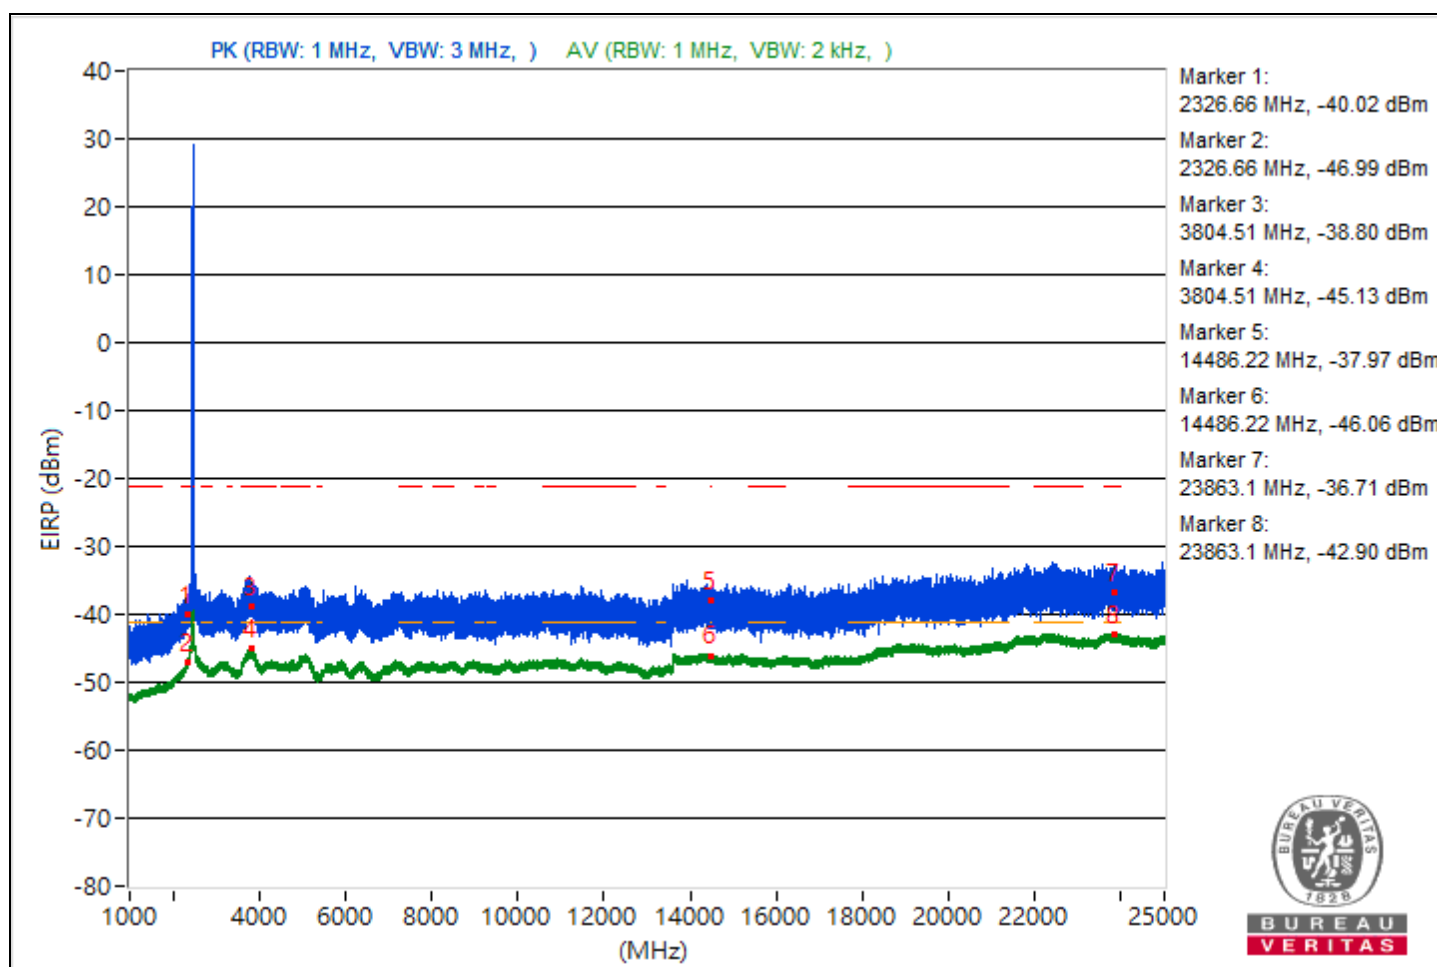

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.56	55.2 PK	74	-18.8	-52.09	-50.88	8.37	-40.06
2	2338.56	48.03 AV	54	-5.97	-58.36	-58.86	8.37	-47.23
3	3814.16	58.7 PK	74	-15.3	-47.32	-48.66	8.37	-36.56
4	3814.16	50.02 AV	54	-3.98	-56.3	-56.97	8.37	-45.24
5	14491.82	56.79 PK	74	-17.21	-49.13	-50.72	8.37	-38.47
6	14491.82	49.11 AV	54	-4.89	-57.24	-57.84	8.37	-46.15
7	23777.3	58.59 PK	74	-15.41	-47.14	-49.2	8.37	-36.67
8	23777.3	52.28 AV	54	-1.72	-54.05	-54.69	8.37	-42.98


Note: Margin value = Emission Level - Limit value

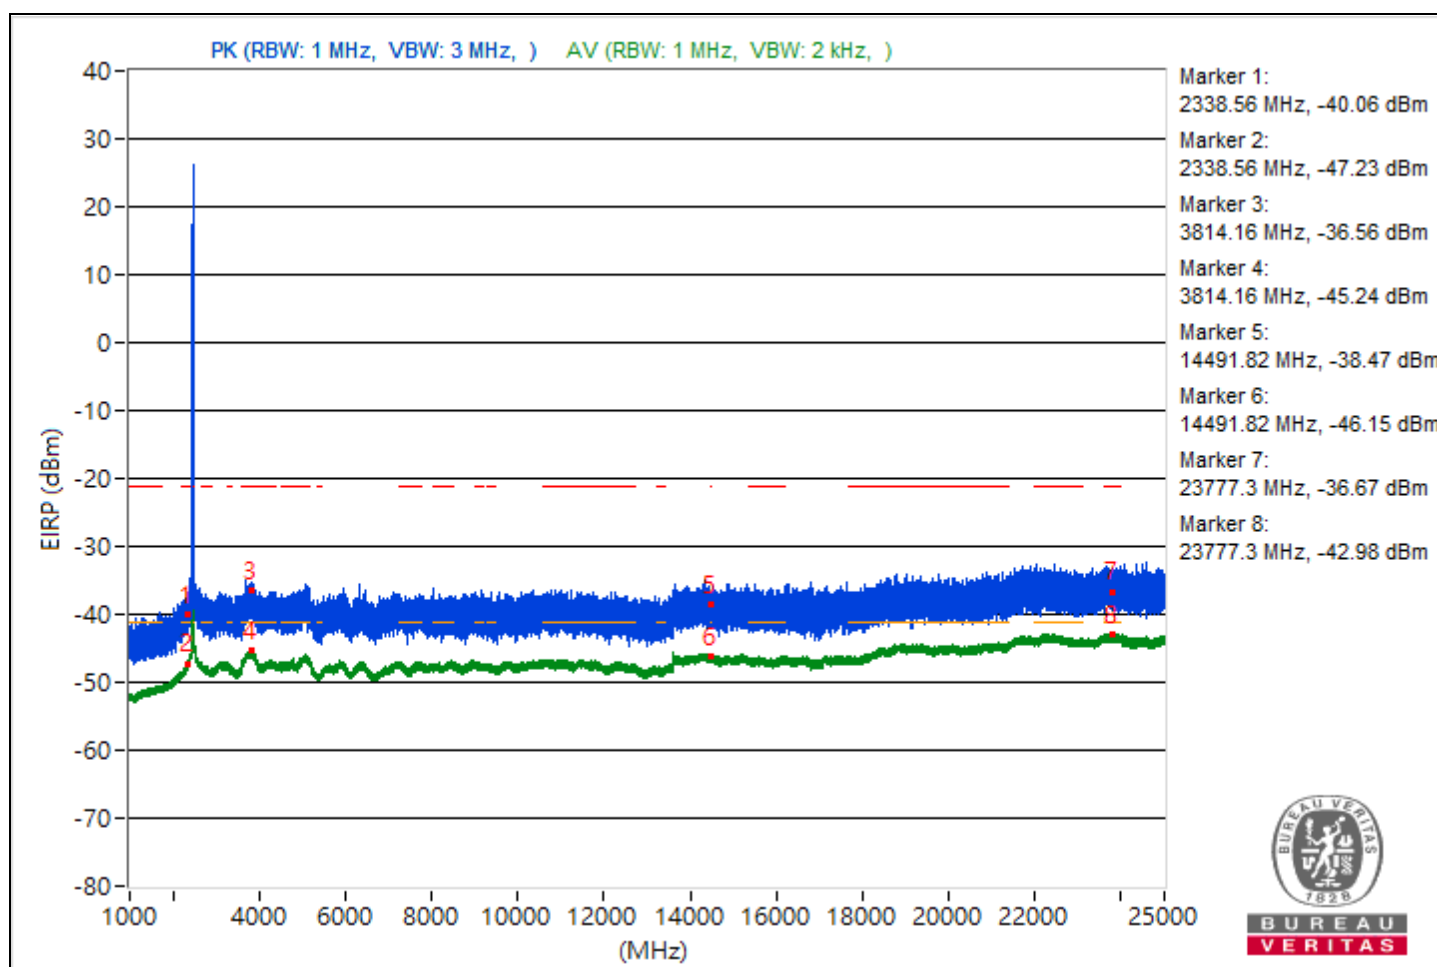

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	23°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2331.09	54.49 PK	74	-19.51	-51.36	-53.11	8.37	-40.77
2	2331.09	47.52 AV	54	-6.48	-58.79	-59.48	8.37	-47.74
3	3817.11	60.02 PK	74	-13.98	-46.05	-47.28	8.37	-35.24
4	3817.11	52.33 AV	54	-1.67	-54.62	-54.03	8.37	-42.93
5	14470.84	56.35 PK	74	-17.65	-50	-50.59	8.37	-38.91
6	14470.84	49.98 AV	54	-4.02	-56.33	-57.03	8.37	-45.28
7	23884.9	60.99 PK	74	-13.01	-45.46	-45.84	8.37	-34.27
8	23884.9	53.96 AV	54	-0.04	-52.4	-52.98	8.37	-41.3


Note: Margin value = Emission Level - Limit value

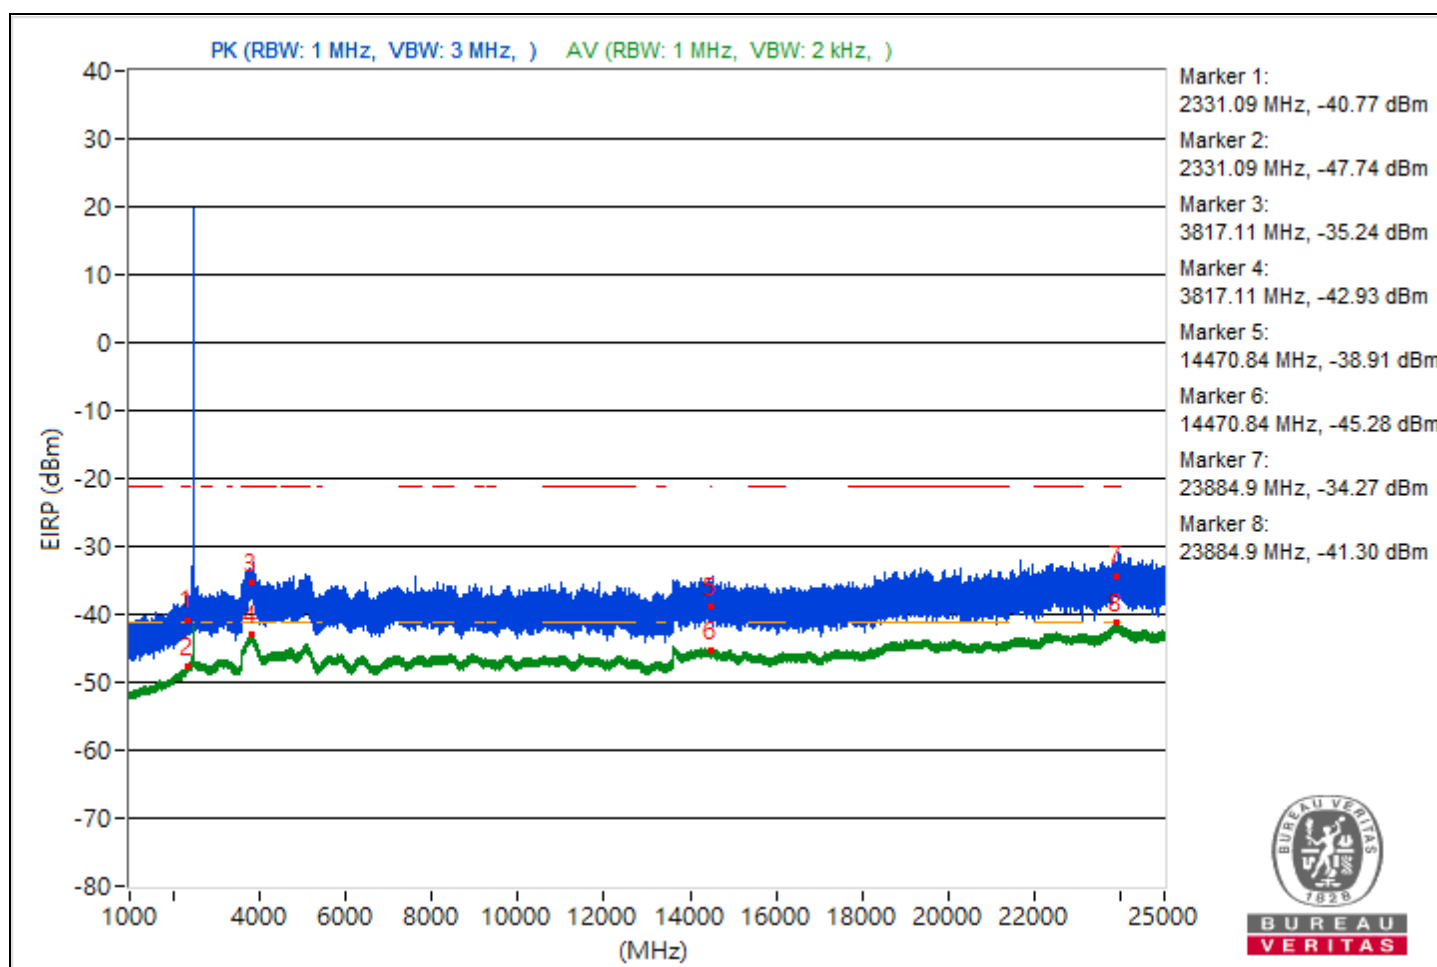

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2333.34	55.64 PK	74	-18.36	-50.61	-51.43	8.37	-39.62
2	2333.34	48.61 AV	54	-5.39	-58.22	-57.84	8.37	-46.65
3	3816.96	57.62 PK	74	-16.38	-48.68	-49.39	8.37	-37.64
4	3816.96	50 AV	54	-4	-57.03	-56.29	8.37	-45.26
5	14493.42	54.21 PK	74	-19.79	-51.55	-53.55	8.37	-41.05
6	14493.42	49.09 AV	54	-4.91	-57.81	-57.31	8.37	-46.17
7	22485.2	58.84 PK	74	-15.16	-47.32	-48.34	8.37	-36.42
8	22485.2	52.33 AV	54	-1.67	-54.72	-53.92	8.37	-42.93


Note: Margin value = Emission Level - Limit value

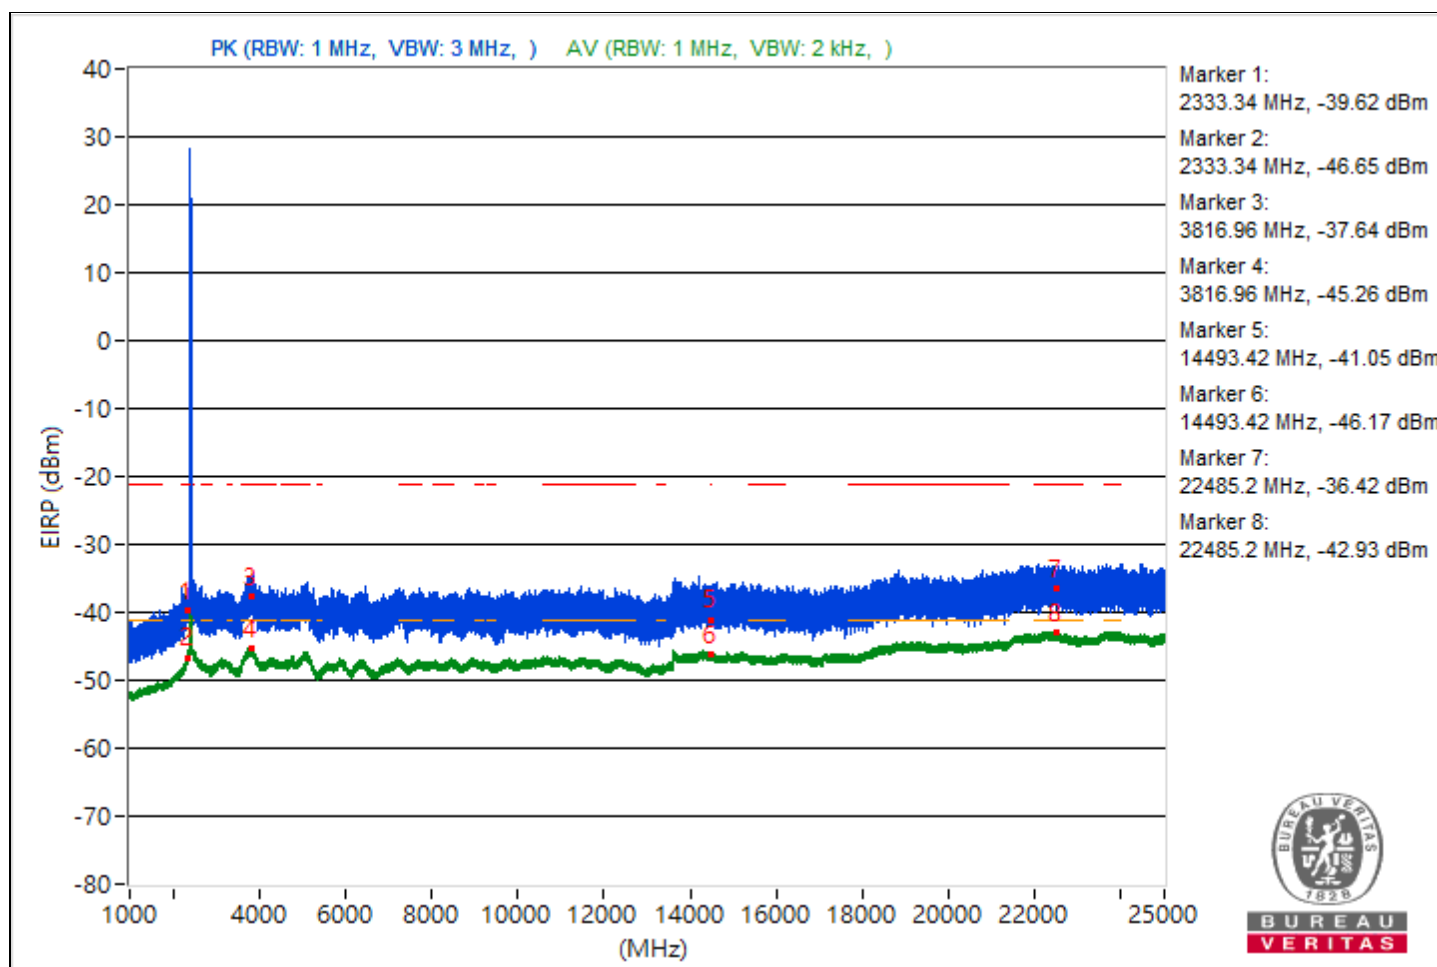

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.8	57.92 PK	74	-16.08	-48.31	-49.17	8.37	-37.34
2	2339.8	49.29 AV	54	-4.71	-57.63	-57.08	8.37	-45.97
3	4865.32	59.97 PK	74	-14.03	-49.91	-44.83	8.37	-35.29
4	4865.32	50.45 AV	54	-3.55	-58.67	-54.62	8.37	-44.81
5	14475.73	55.8 PK	74	-18.2	-49.39	-53.02	8.37	-39.46
6	14475.73	49.4 AV	54	-4.6	-56.98	-57.52	8.37	-45.86
7	22287.4	59.37 PK	74	-14.63	-46.31	-48.51	8.37	-35.89
8	22287.4	52.34 AV	54	-1.66	-54.58	-54.04	8.37	-42.92


Note: Margin value = Emission Level - Limit value

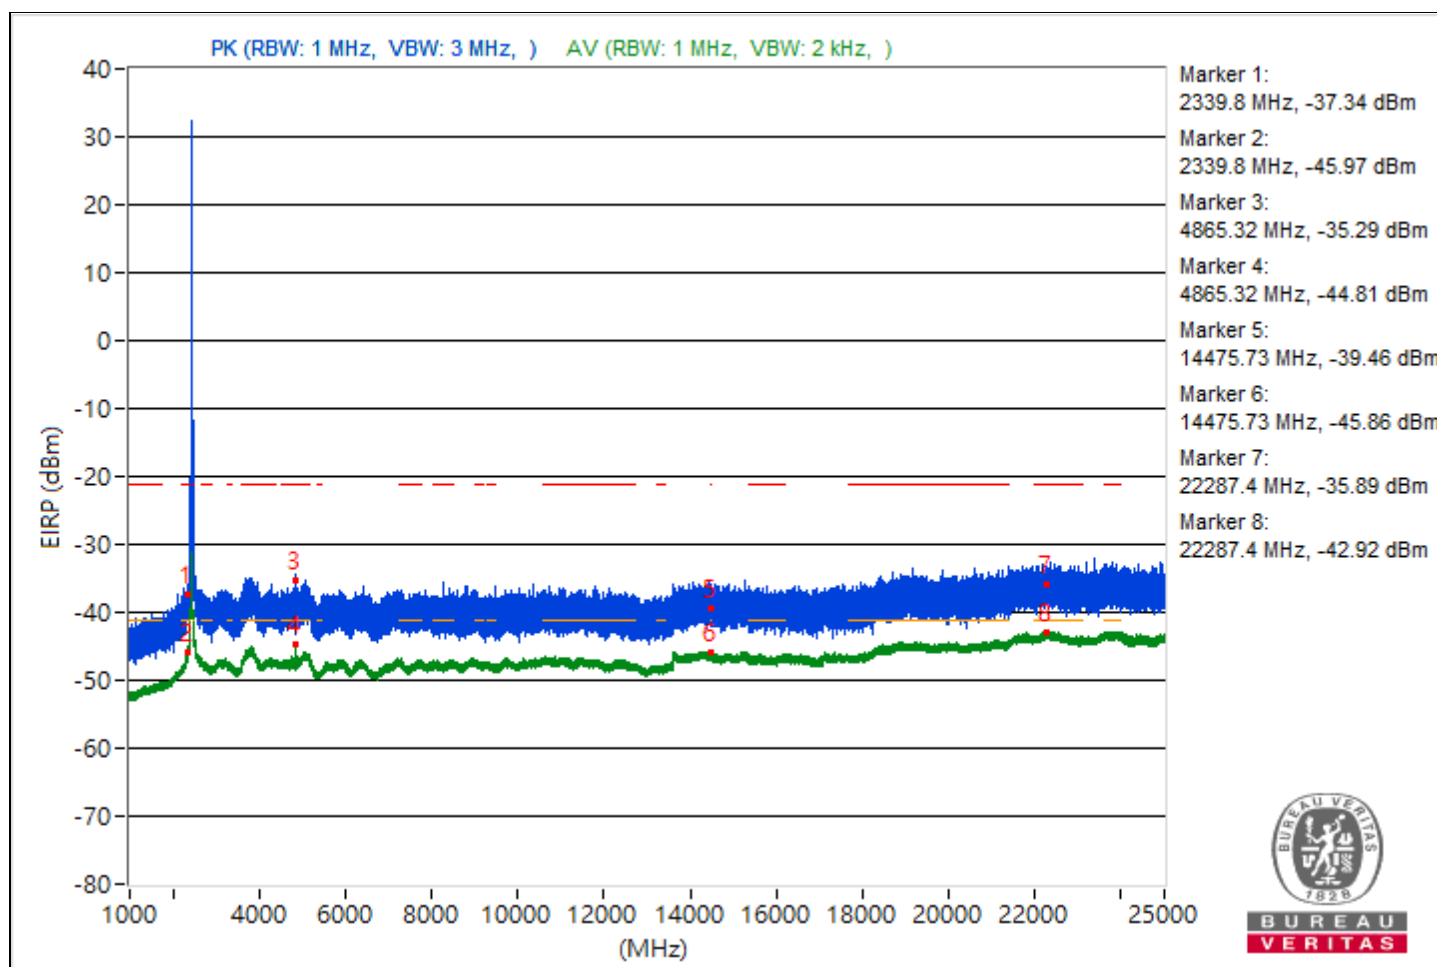

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.38	54.98 PK	74	-19.02	-51.2	-52.18	8.37	-40.28
2	2336.38	48.27 AV	54	-5.73	-57.94	-58.85	8.37	-46.99
3	3810.5	58.72 PK	74	-15.28	-48.04	-47.81	8.37	-36.54
4	3810.5	49.76 AV	54	-4.24	-56.34	-57.48	8.37	-45.5
5	14475.47	54.59 PK	74	-19.41	-52.21	-51.91	8.37	-40.67
6	14475.47	49.25 AV	54	-4.75	-57.6	-57.19	8.37	-46.01
7	22241.5	57.91 PK	74	-16.09	-47.86	-49.81	8.37	-37.35
8	22241.5	52.33 AV	54	-1.67	-53.91	-54.74	8.37	-42.93


Note: Margin value = Emission Level - Limit value

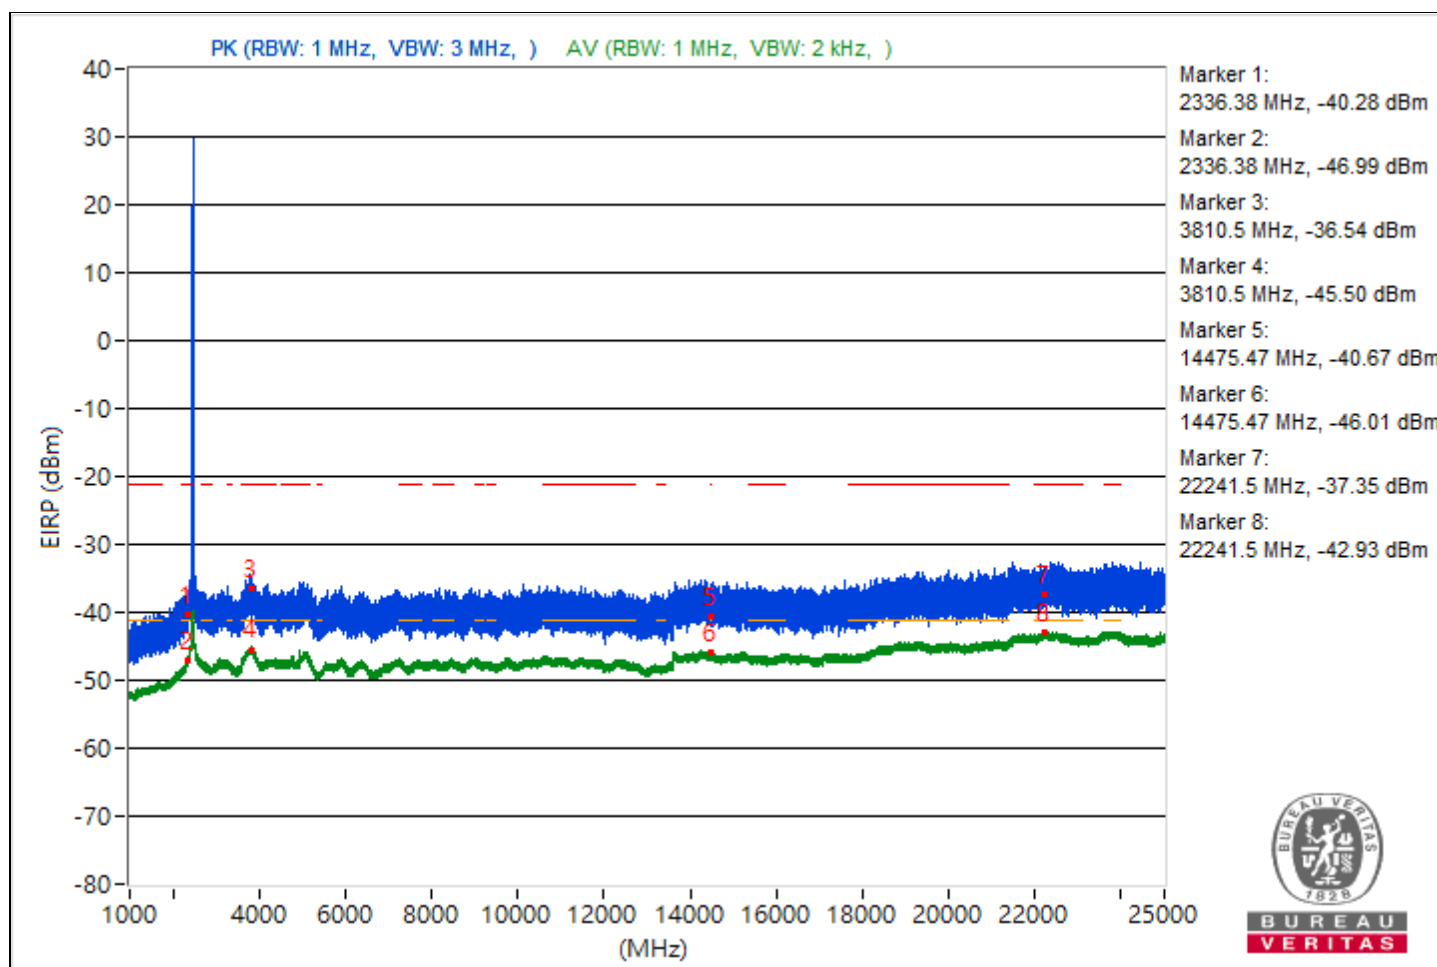

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2331.94	55.78 PK	74	-18.22	-51.35	-50.42	8.37	-39.48
2	2331.94	47.96 AV	54	-6.04	-59.08	-58.32	8.37	-47.3
3	3784.37	57.22 PK	74	-16.78	-51.41	-48.07	8.37	-38.04
4	3784.37	50.03 AV	54	-3.97	-57.11	-56.16	8.37	-45.23
5	14495.64	55.23 PK	74	-18.77	-50.96	-51.91	8.37	-40.03
6	14495.64	49.08 AV	54	-4.92	-58.08	-57.1	8.37	-46.18
7	22478.5	59.77 PK	74	-14.23	-47.11	-46.65	8.37	-35.49
8	22478.5	52.25 AV	54	-1.75	-54.92	-53.92	8.37	-43.01


Note: Margin value = Emission Level - Limit value

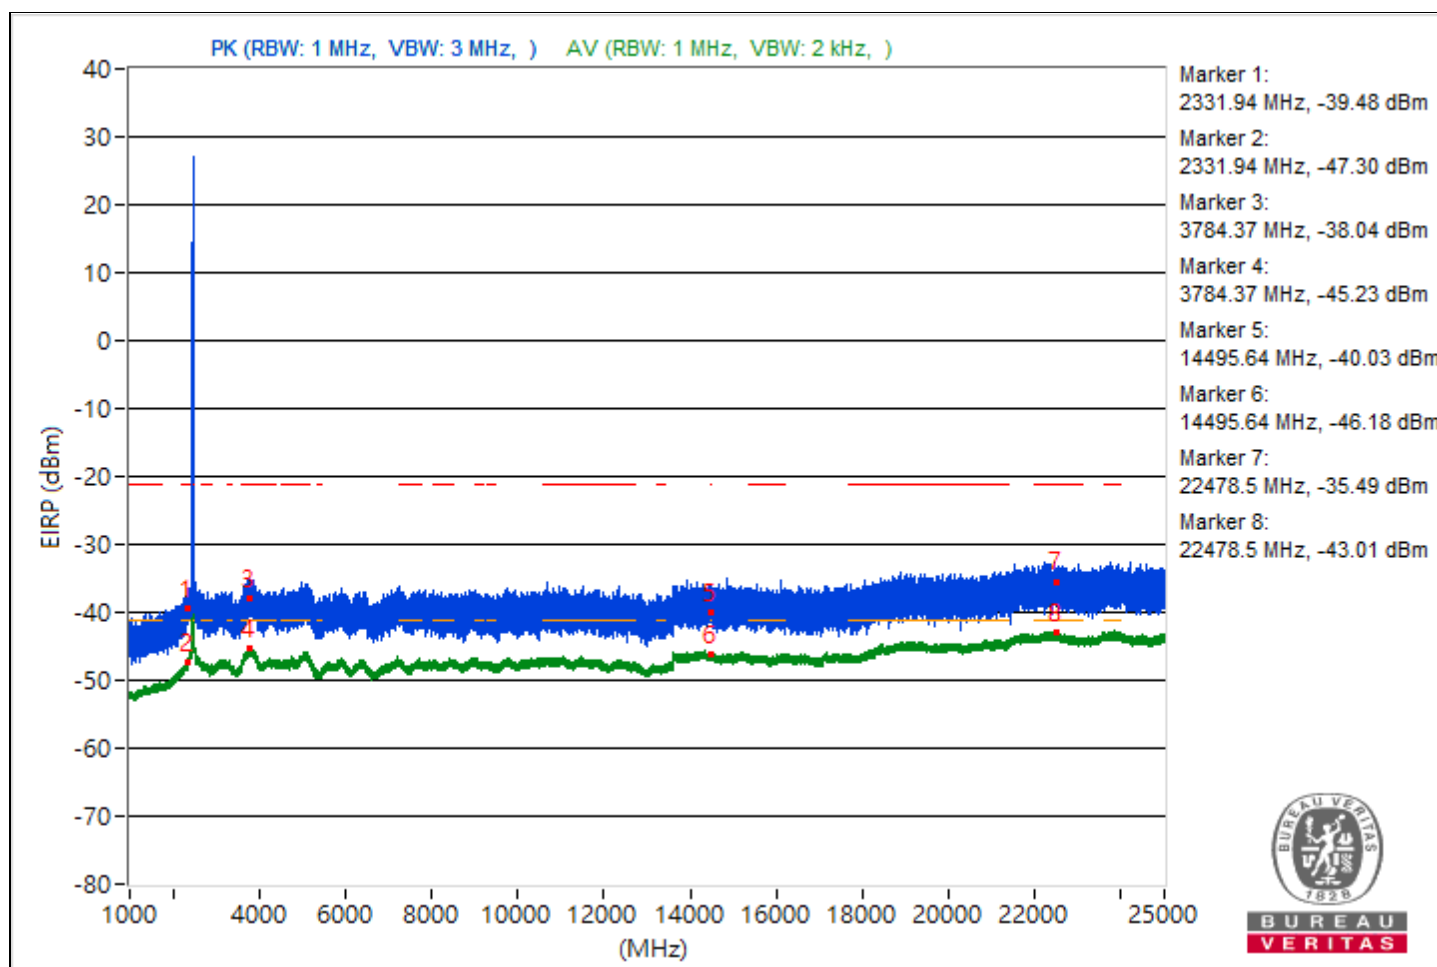

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	23°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2323.93	55.52 PK	74	-18.48	-50.58	-51.74	8.37	-39.74
2	2323.93	48.4 AV	54	-5.6	-57.98	-58.51	8.37	-46.86
3	3822.56	59.12 PK	74	-14.88	-48.81	-46.53	8.37	-36.14
4	3822.56	52.15 AV	54	-1.85	-54.83	-54.17	8.37	-43.11
5	14480.89	58.05 PK	74	-15.95	-49.07	-48.16	8.37	-37.21
6	14480.89	50.1 AV	54	-3.9	-56.88	-56.23	8.37	-45.16
7	23969.3	61.65 PK	74	-12.35	-43.82	-46.6	8.37	-33.61
8	23969.3	53.83 AV	54	-0.17	-52.64	-52.99	8.37	-41.43


Note: Margin value = Emission Level - Limit value

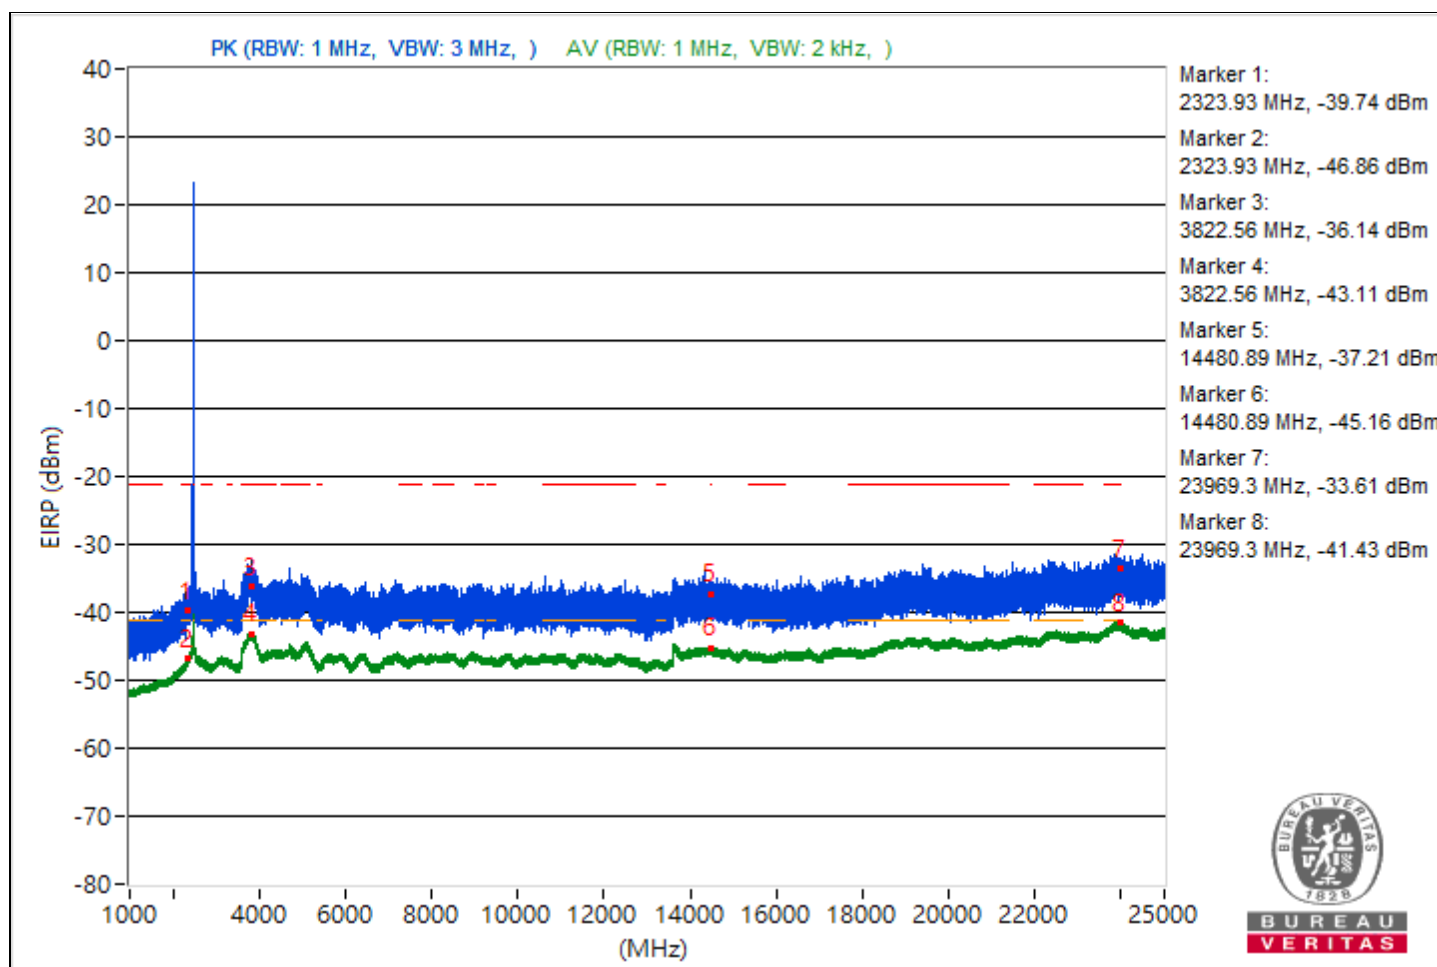

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2335.83	57.22 PK	74	-16.78	-49.75	-49.12	8.37	-38.04
2	2335.83	48.8 AV	54	-5.2	-58.08	-57.6	8.37	-46.46
3	3789.03	58.49 PK	74	-15.51	-48.91	-47.51	8.37	-36.77
4	3789.03	49.77 AV	54	-4.23	-56.25	-57.59	8.37	-45.49
5	14493.07	56.36 PK	74	-17.64	-51.68	-49.22	8.37	-38.9
6	14493.07	49.18 AV	54	-4.82	-57.22	-57.72	8.37	-46.08
7	23888.5	58.49 PK	74	-15.51	-49.17	-47.32	8.37	-36.77
8	23888.5	52.3 AV	54	-1.7	-54.92	-53.83	8.37	-42.96


Note: Margin value = Emission Level - Limit value

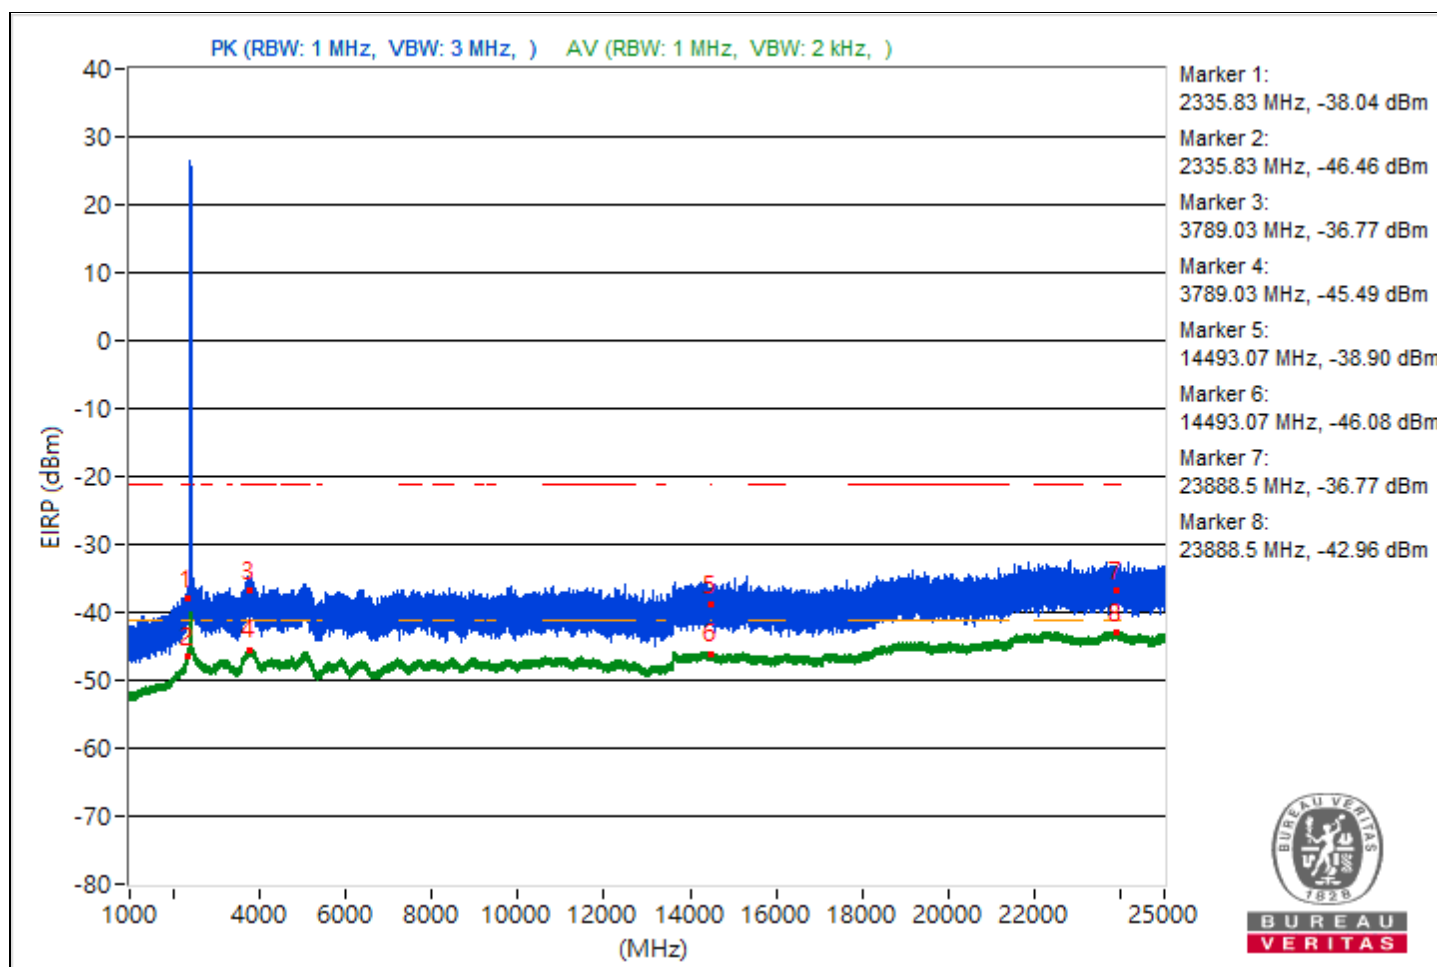

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2328.52	55.43 PK	74	-18.57	-50.42	-52.16	8.37	-39.83
2	2328.52	49.23 AV	54	-4.77	-57.67	-57.16	8.37	-46.03
3	3809.96	56.86 PK	74	-17.14	-50.14	-49.45	8.37	-38.4
4	3809.96	49.91 AV	54	-4.09	-56.17	-57.38	8.37	-45.35
5	14484.36	55.74 PK	74	-18.26	-53.01	-49.48	8.37	-39.52
6	14484.36	49.16 AV	54	-4.84	-57.89	-57.1	8.37	-46.1
7	23771.8	57.69 PK	74	-16.31	-48.87	-49.04	8.37	-37.57
8	23771.8	52.39 AV	54	-1.61	-54.58	-53.94	8.37	-42.87


Note: Margin value = Emission Level - Limit value

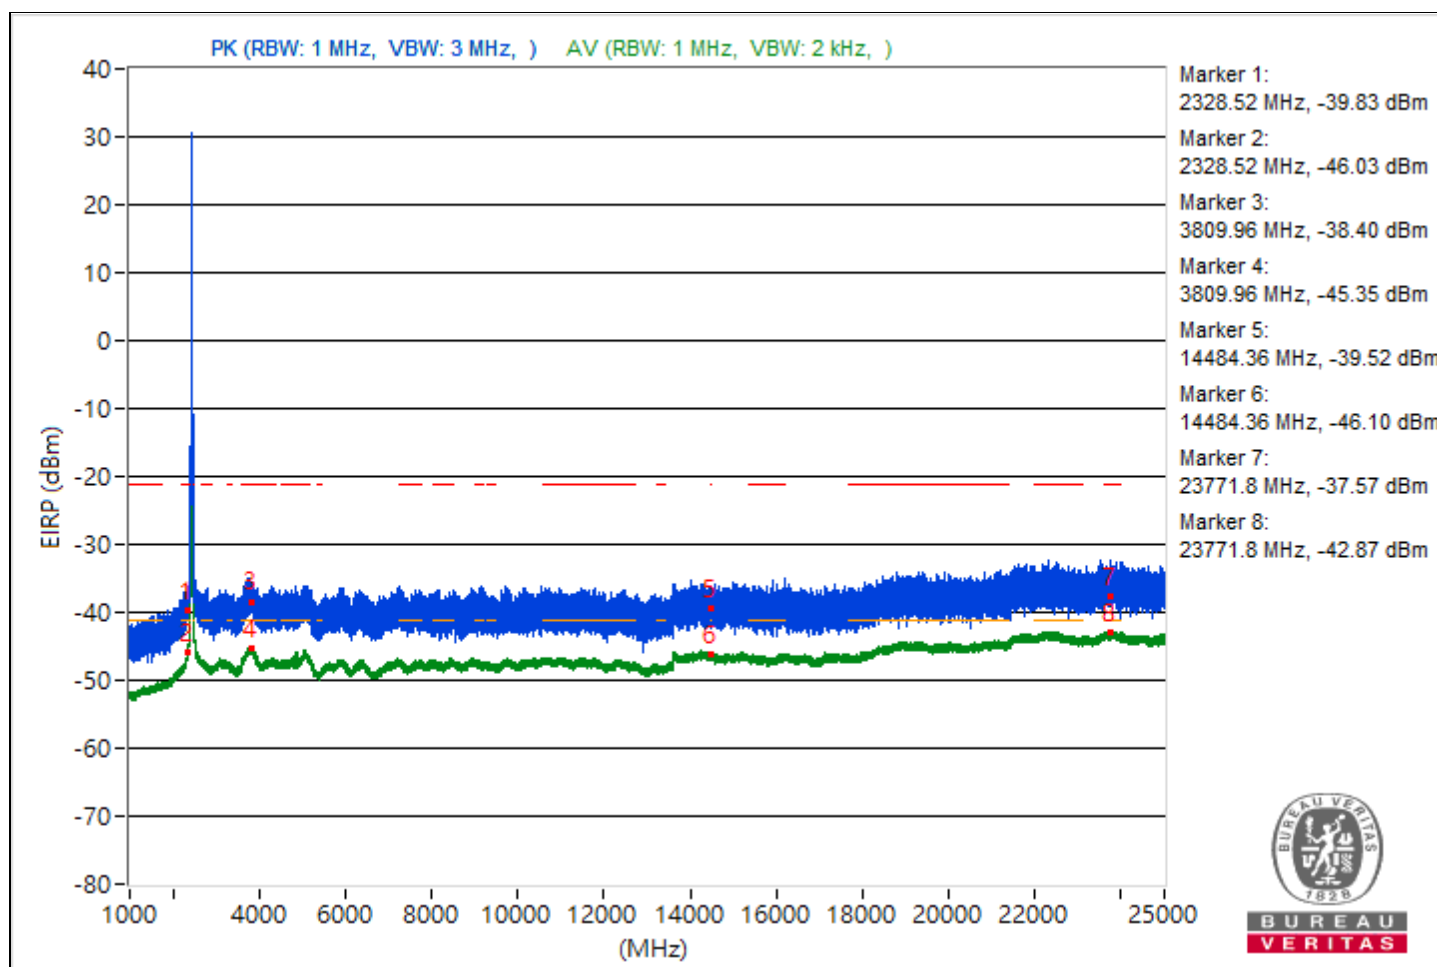

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2331.09	55.05 PK	74	-18.95	-51.11	-52.12	8.37	-40.21
2	2331.09	48.01 AV	54	-5.99	-57.98	-59.39	8.37	-47.25
3	3818.98	57.54 PK	74	-16.46	-47.77	-51.03	8.37	-37.72
4	3818.98	49.98 AV	54	-4.02	-56.97	-56.37	8.37	-45.28
5	14480.71	54.47 PK	74	-19.53	-51.16	-53.5	8.37	-40.79
6	14480.71	49.19 AV	54	-4.81	-57.09	-57.85	8.37	-46.07
7	22217.3	59.23 PK	74	-14.77	-46.96	-47.91	8.37	-36.03
8	22217.3	52.24 AV	54	-1.76	-55	-53.87	8.37	-43.02


Note: Margin value = Emission Level - Limit value

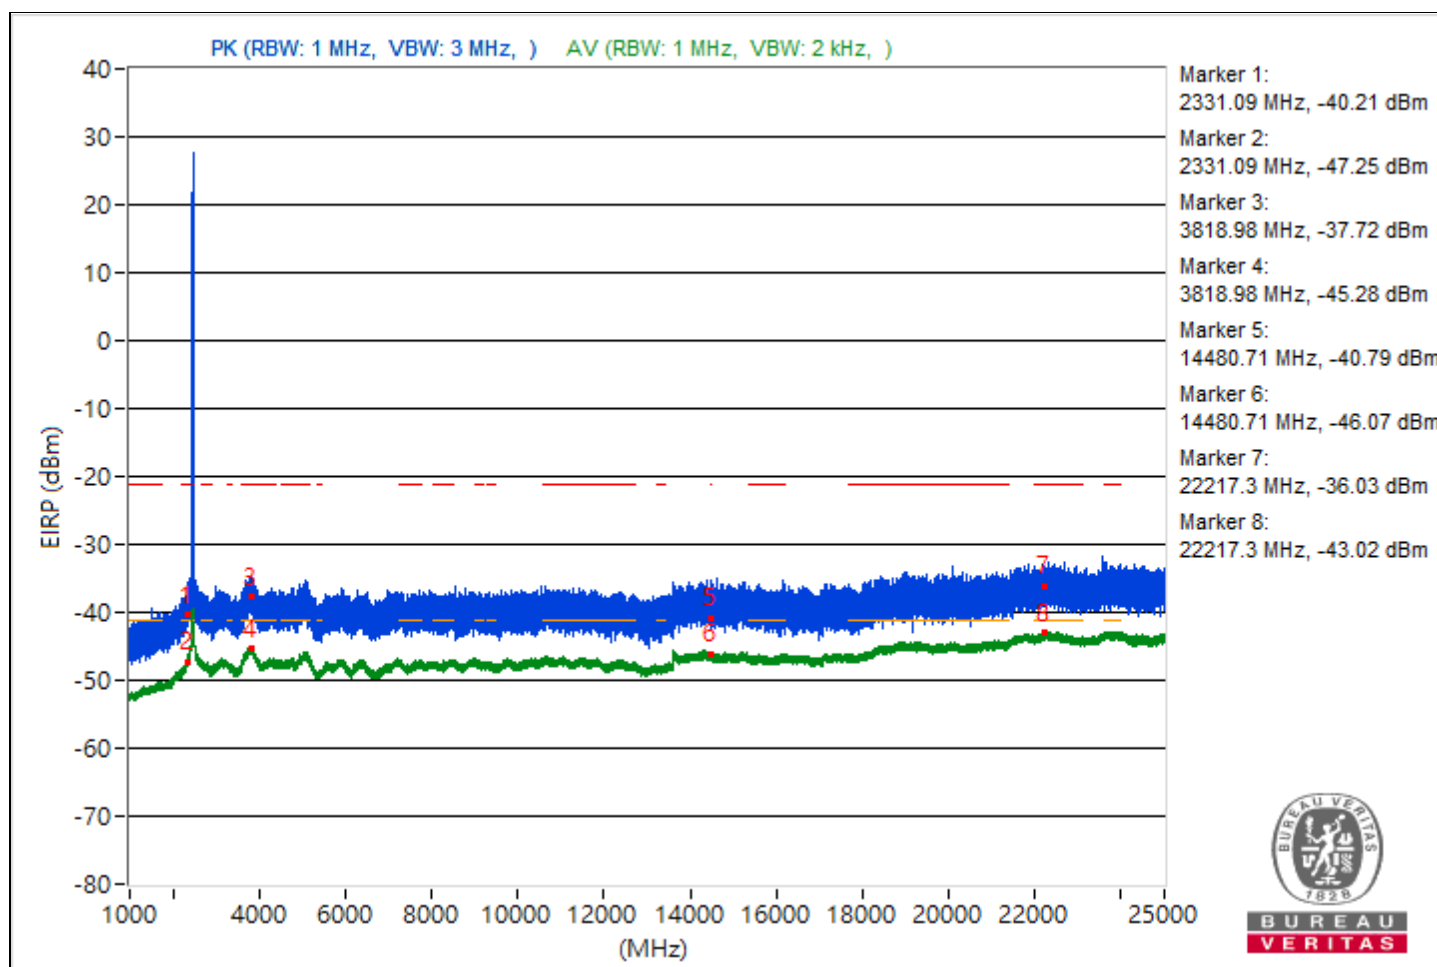

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2321.91	54.85 PK	74	-19.15	-50.75	-53.15	8.37	-40.41
2	2321.91	48.09 AV	54	-5.91	-58.1	-59.07	8.37	-47.17
3	3790.59	58.49 PK	74	-15.51	-49.1	-47.38	8.37	-36.77
4	3790.59	49.99 AV	54	-4.01	-57.16	-56.18	8.37	-45.27
5	14479.91	54.6 PK	74	-19.4	-51.45	-52.72	8.37	-40.66
6	14479.91	49.21 AV	54	-4.79	-57.04	-57.85	8.37	-46.05
7	23725	59.52 PK	74	-14.48	-47.05	-47.19	8.37	-35.74
8	23725	52.33 AV	54	-1.67	-54.82	-53.86	8.37	-42.93


Note: Margin value = Emission Level - Limit value

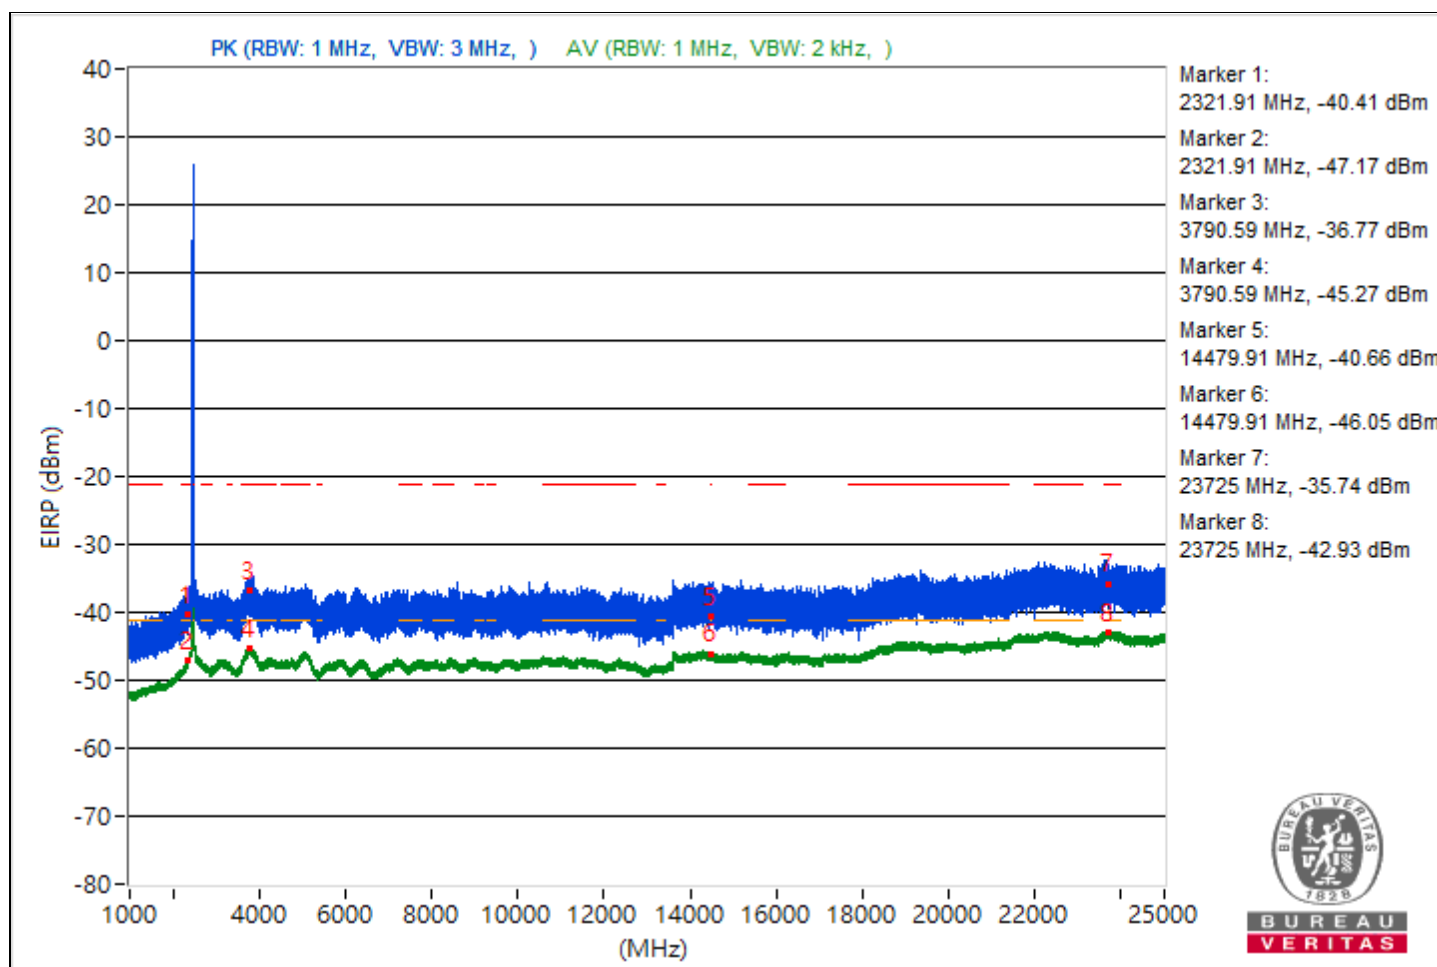

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	23°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2327.51	53.24 PK	74	-20.76	-52.79	-54.12	8.37	-42.02
2	2327.51	47.39 AV	54	-6.61	-59.68	-58.85	8.37	-47.87
3	3851.88	59.85 PK	74	-14.15	-47.59	-46.12	8.37	-35.41
4	3851.88	52.1 AV	54	-1.9	-55.04	-54.09	8.37	-43.16
5	14479.64	55.64 PK	74	-18.36	-50.41	-51.69	8.37	-39.62
6	14479.64	49.9 AV	54	-4.1	-57.26	-56.28	8.37	-45.36
7	23904.4	59.66 PK	74	-14.34	-46.59	-47.42	8.37	-35.6
8	23904.4	53.67 AV	54	-0.33	-52.78	-53.17	8.37	-41.59

Note: Margin value = Emission Level - Limit value

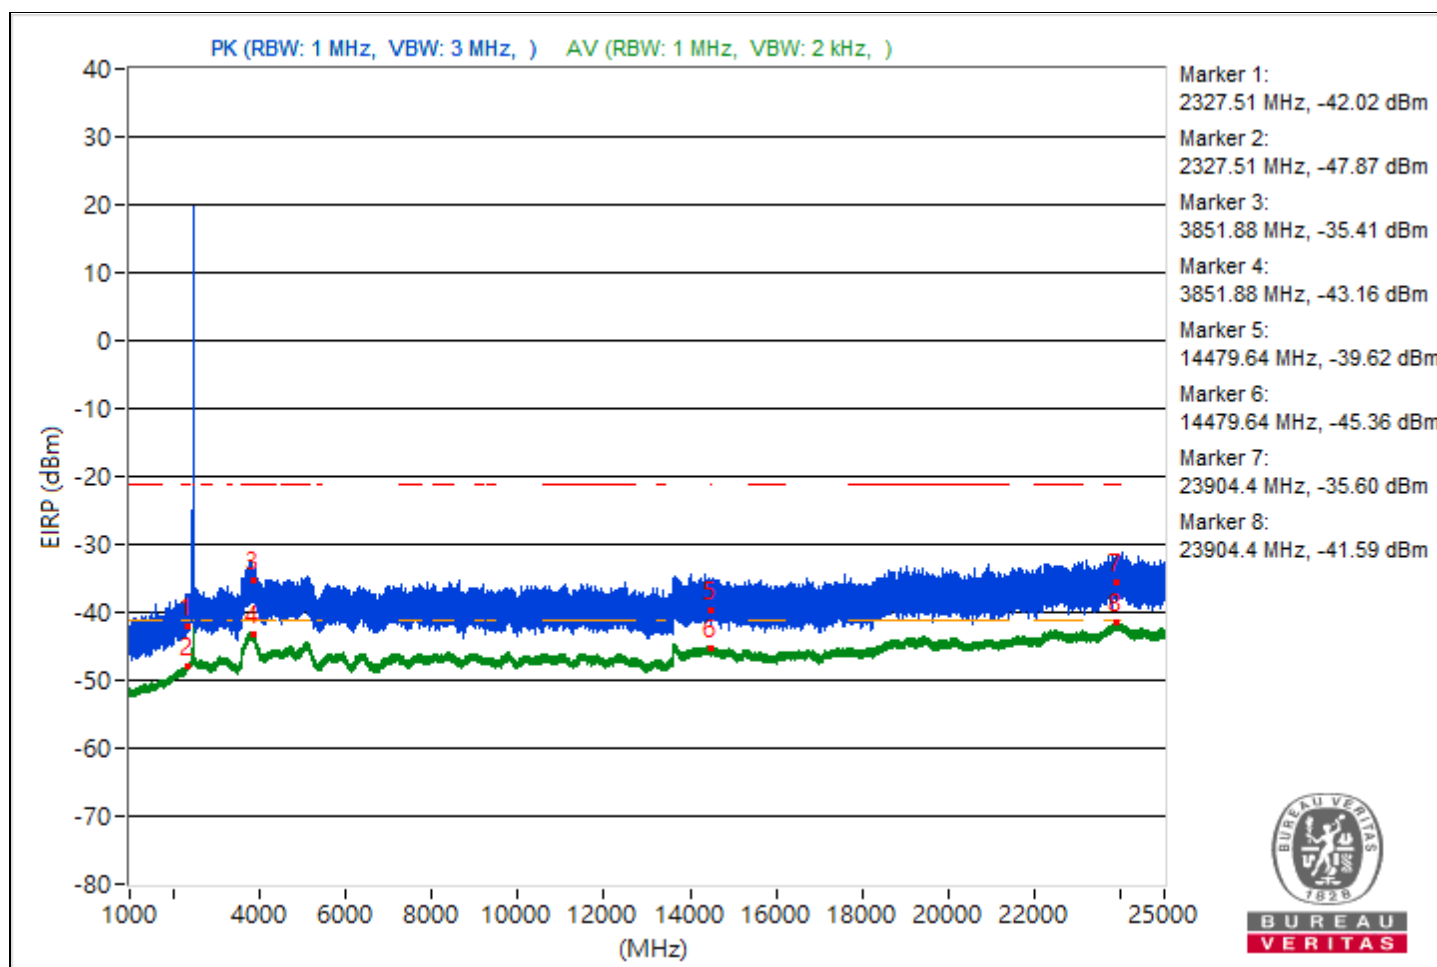

Conducted Band Edges


2TX

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2411.22	121.29 PK			14.04	13.6	9.2	26.03
2	*2411.22	117.91 AV			10.61	10.26	9.2	22.65
3	2387.71	63.08 PK	74	-10.92	-44.41	-44.38	9.2	-32.18
4	2387.71	53.43 AV	54	-0.57	-53.58	-54.55	9.2	-41.83
5	2484.7	60.35 PK	74	-13.65	-46.86	-47.4	9.2	-34.91
6	2484.7	49.15 AV	54	-4.85	-58.28	-58.36	9.2	-46.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

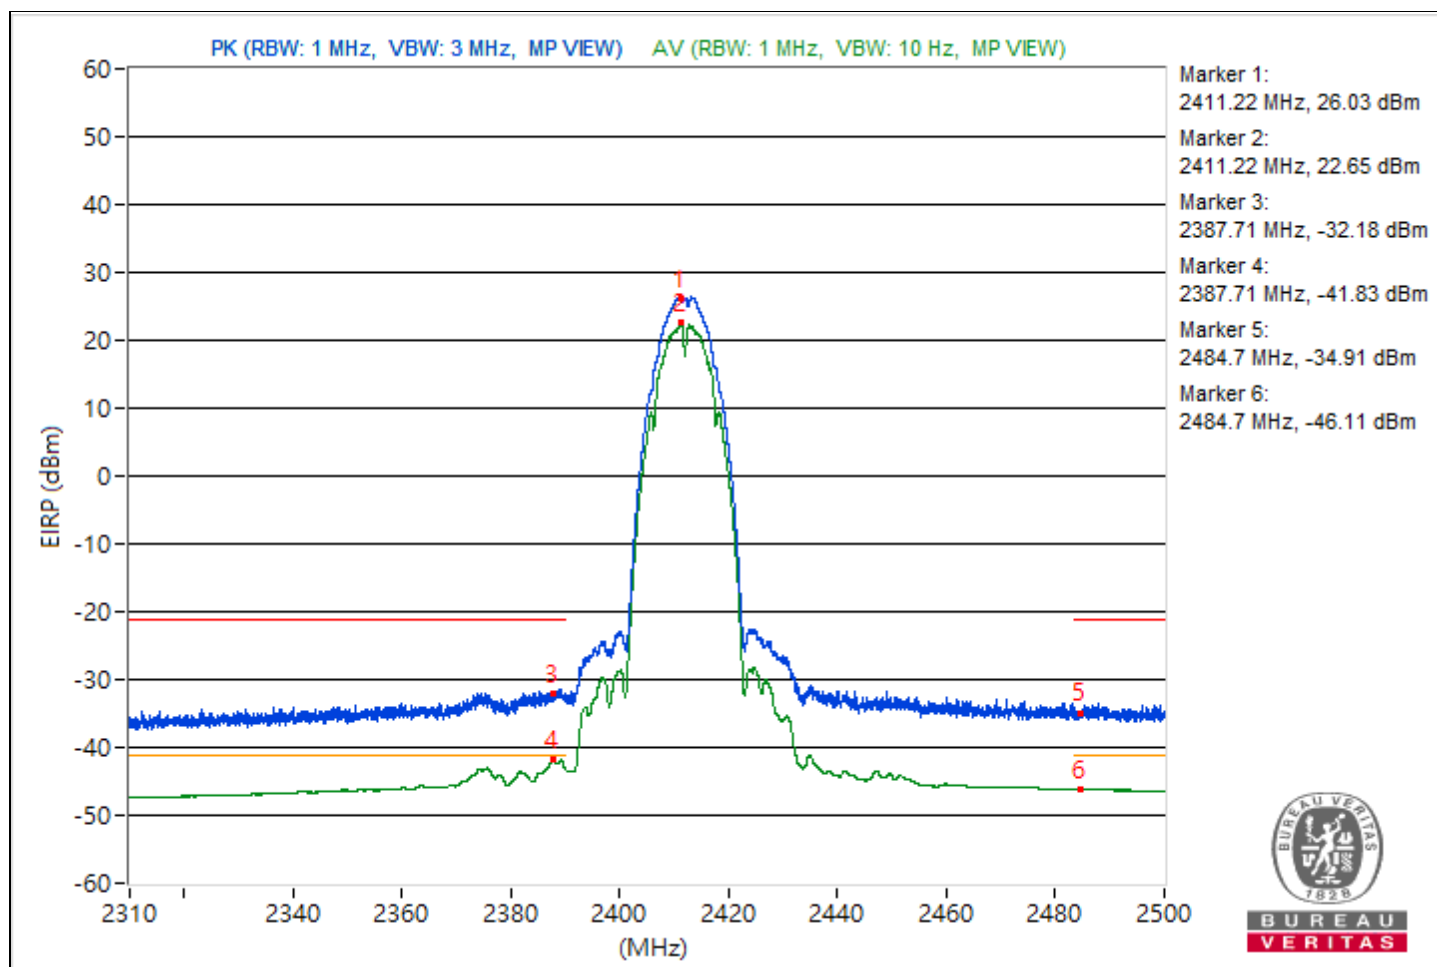


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2436.16	125.35 PK			17.96	17.8	9.2	30.09
2	*2436.16	121.65 AV			14.36	14	9.2	26.39
3	2389.97	62.77 PK	74	-11.23	-44.22	-45.25	9.2	-32.49
4	2389.97	51.97 AV	54	-2.03	-54.7	-56.48	9.2	-43.29
5	2496.51	61.62 PK	74	-12.38	-44.9	-47.07	9.2	-33.64
6	2496.51	52 AV	54	-2	-54.44	-56.83	9.2	-43.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

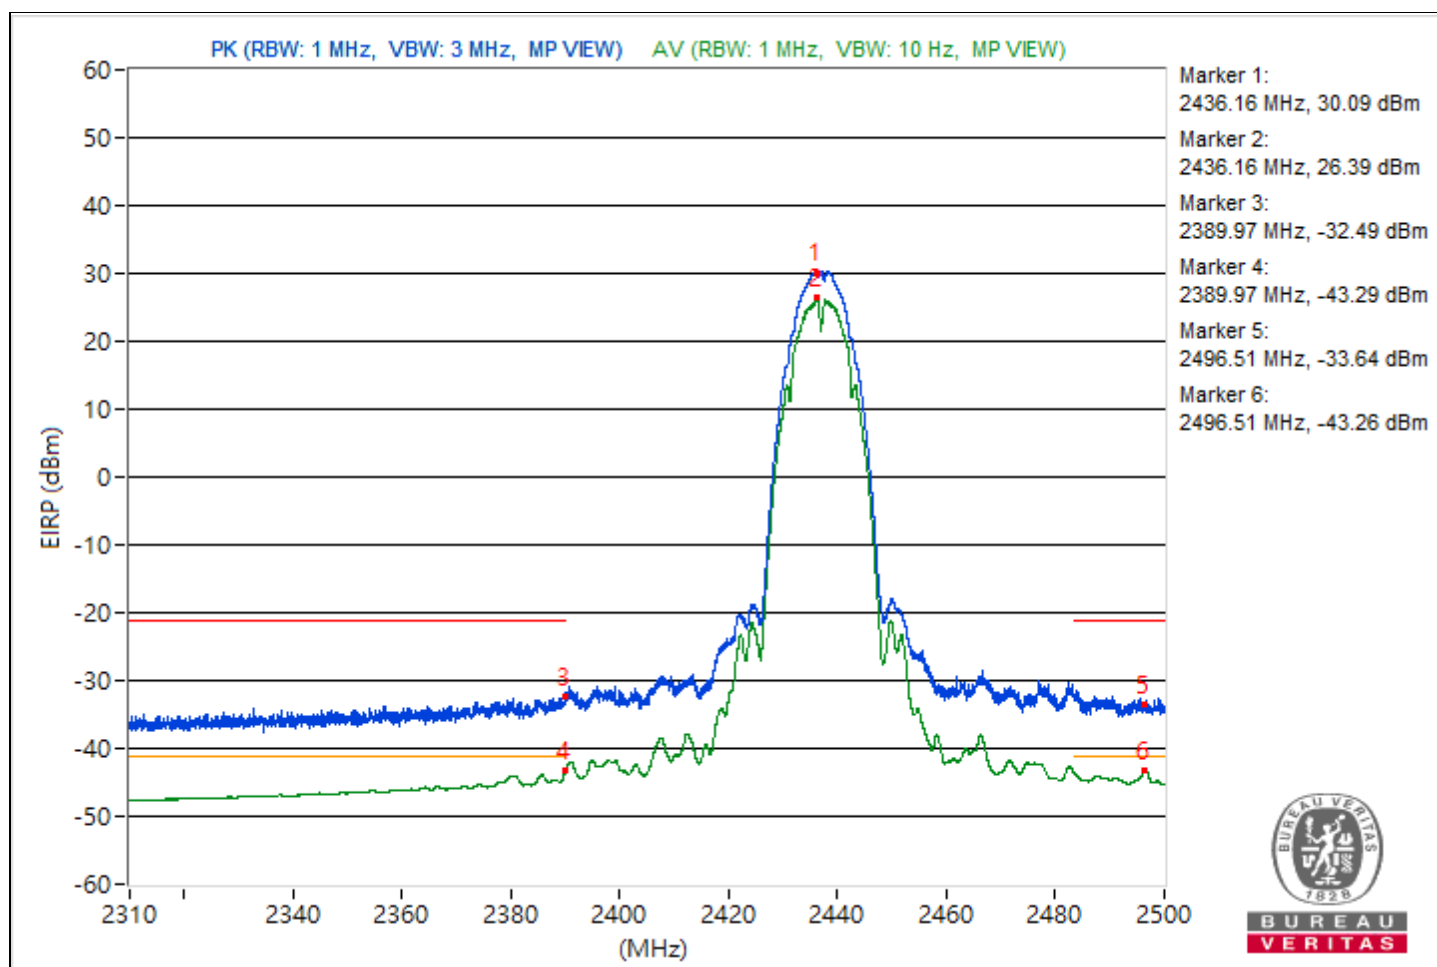


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2461.22	121.8 PK			14.59	14.04	9.2	26.54
2	*2461.22	118.4 AV			11.15	10.69	9.2	23.14
3	2388.95	60.01 PK	74	-13.99	-47.05	-47.92	9.2	-35.25
4	2388.95	49.2 AV	54	-4.8	-58.37	-58.18	9.2	-46.06
5	2486.63	63.45 PK	74	-10.55	-43.26	-44.94	9.2	-31.81
6	2486.63	53.19 AV	54	-0.81	-53.05	-55.99	9.2	-42.07

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

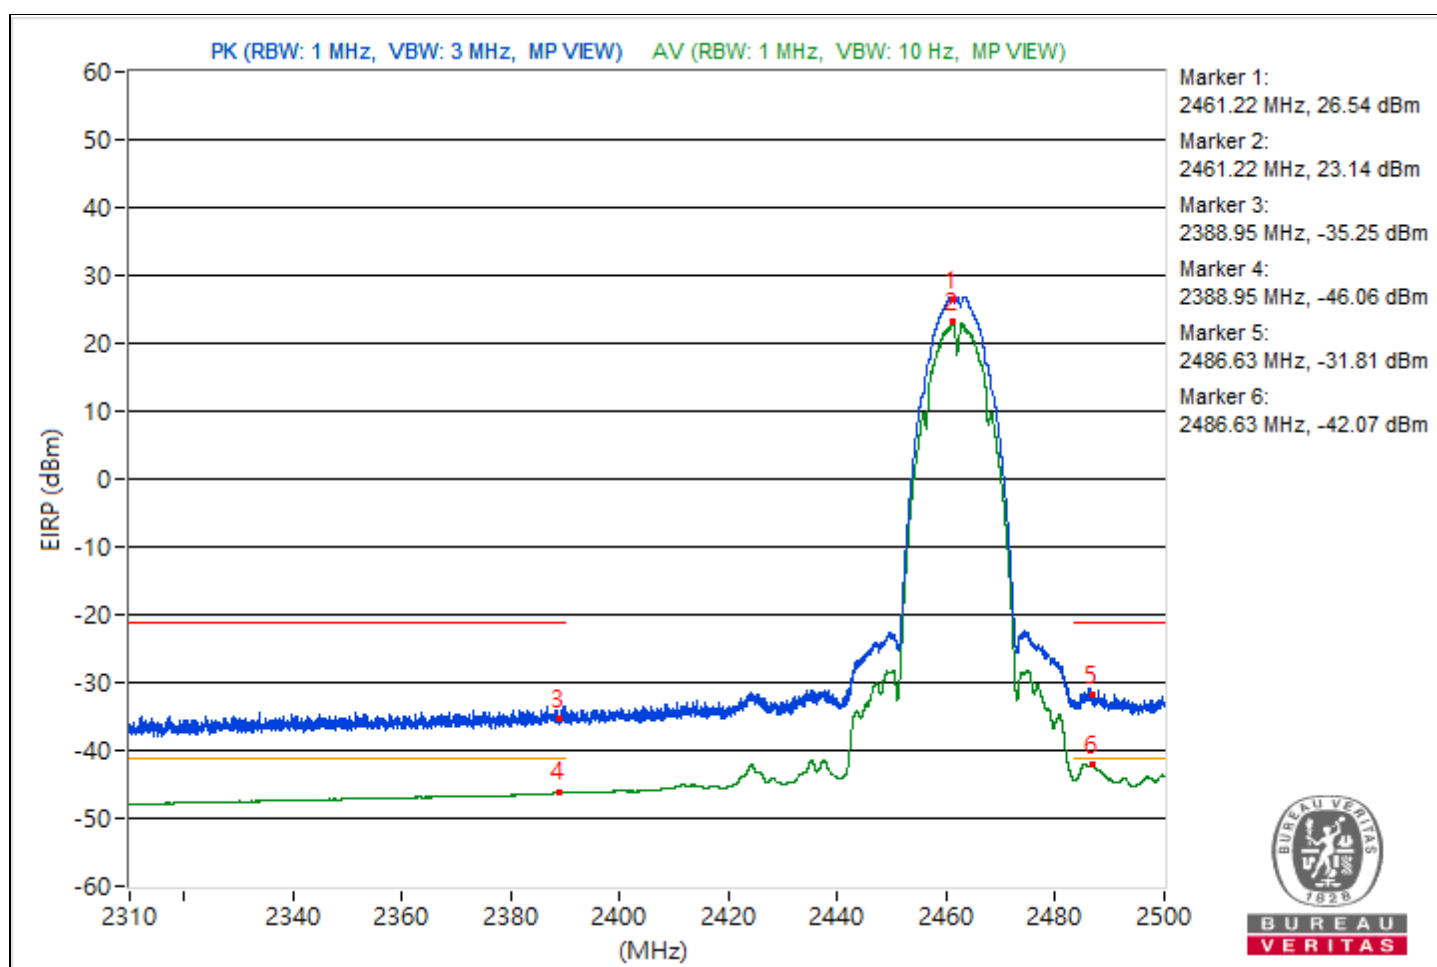


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2466.2	114.91 PK			7.73	7.14	9.2	19.65
2	*2466.2	111.53 AV			4.29	3.81	9.2	16.27
3	2389.8	60.08 PK	74	-13.92	-46.86	-48	9.2	-35.18
4	2389.8	48.79 AV	54	-5.21	-58.54	-58.82	9.2	-46.47
5	2484.4	63.31 PK	74	-10.69	-44.25	-44.07	9.2	-31.95
6	2484.4	53.06 AV	54	-0.94	-53.1	-56.29	9.2	-42.2

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

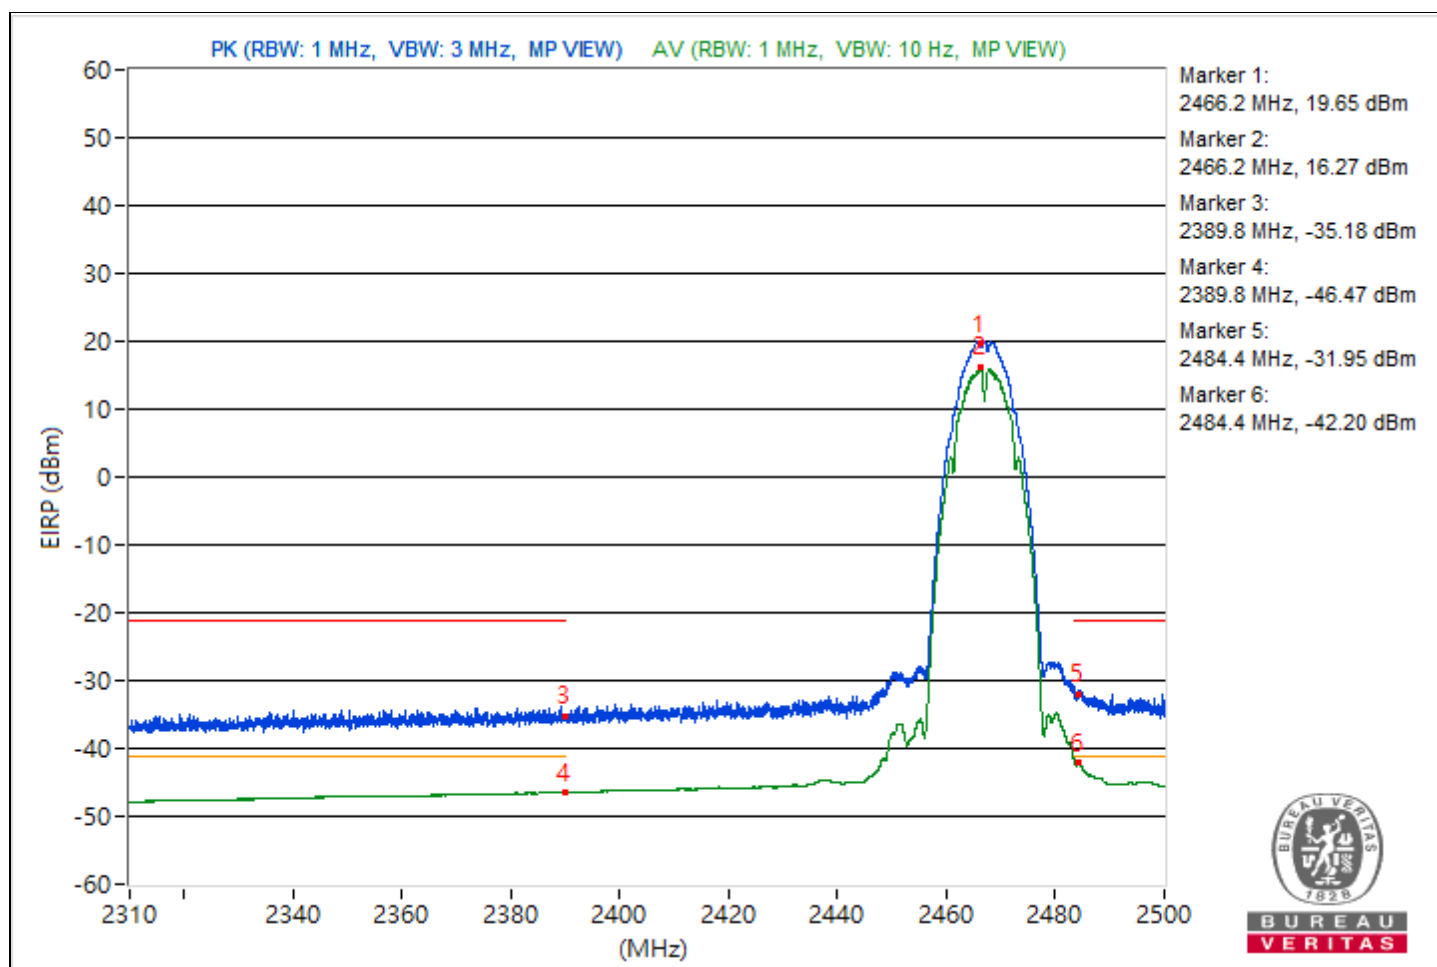


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2471.17	108.37 PK			1.08	0.72	9.2	13.11
2	*2471.17	104.92 AV			-2.33	-2.79	9.2	9.66
3	2389.02	58.01 PK	74	-15.99	-49.57	-49.35	9.2	-37.25
4	2389.02	46.64 AV	54	-7.36	-60.77	-60.9	9.2	-48.62
5	2483.83	61.61 PK	74	-12.39	-45.71	-46.03	9.2	-33.65
6	2483.83	53.11 AV	54	-0.89	-54.3	-54.42	9.2	-42.15

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

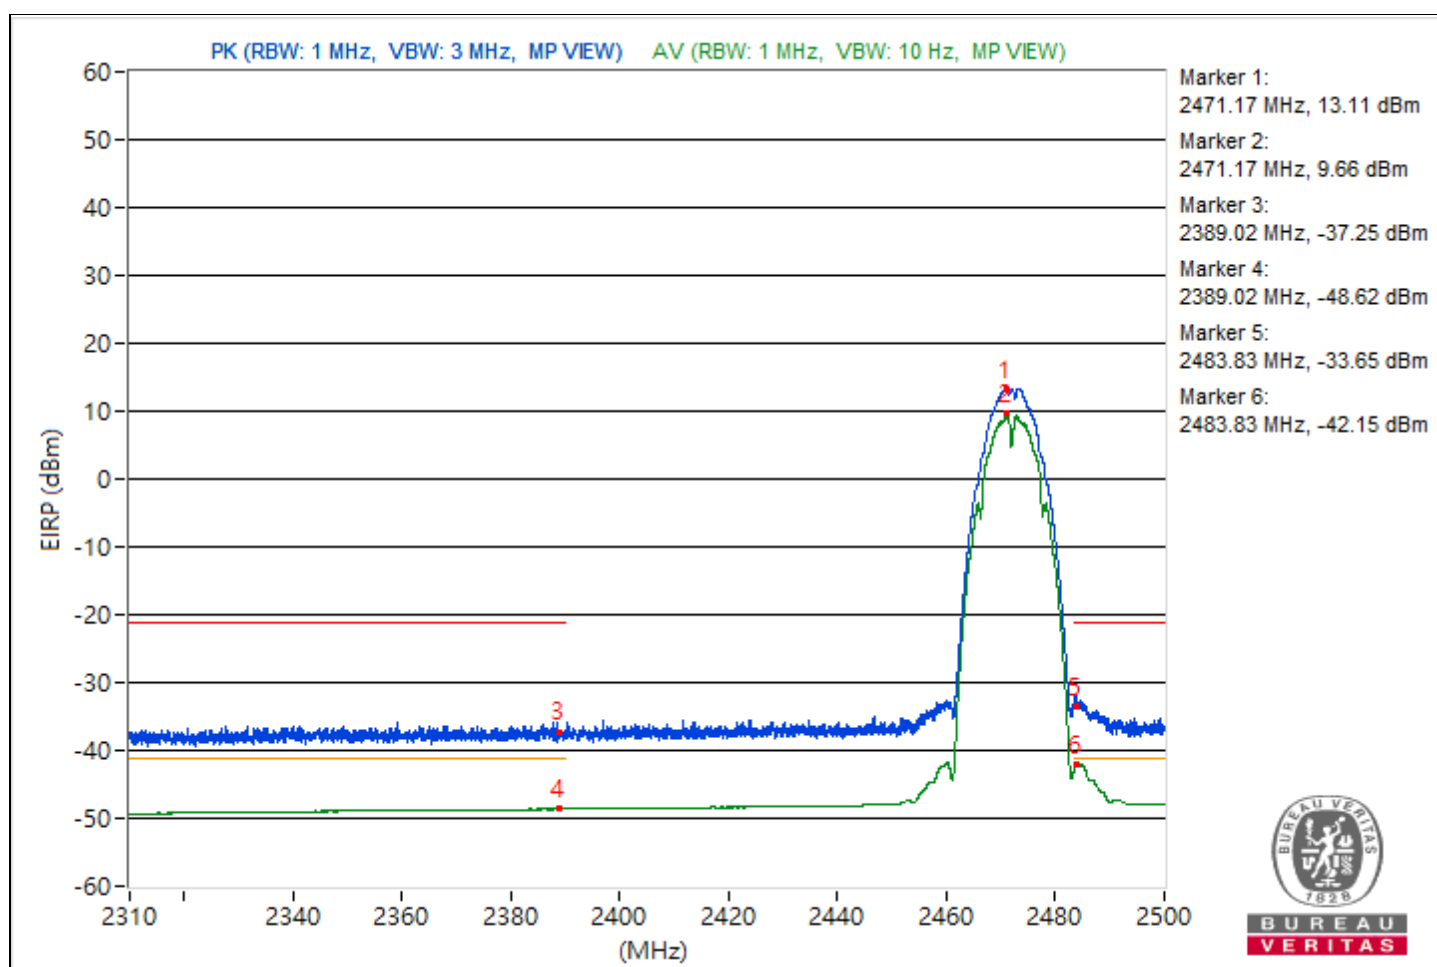


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2410.3	120.05 PK			12.98	12.14	9.2	24.79
2	*2410.3	110.41 AV			3.37	2.46	9.2	15.15
3	2389.82	65.24 PK	74	-8.76	-42.82	-41.71	9.2	-30.02
4	2389.82	53.3 AV	54	-0.7	-53.88	-54.48	9.2	-41.96
5	2483.52	60.54 PK	74	-13.46	-47.72	-46.26	9.2	-34.72
6	2483.52	49.21 AV	54	-4.79	-58.32	-58.2	9.2	-46.05

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

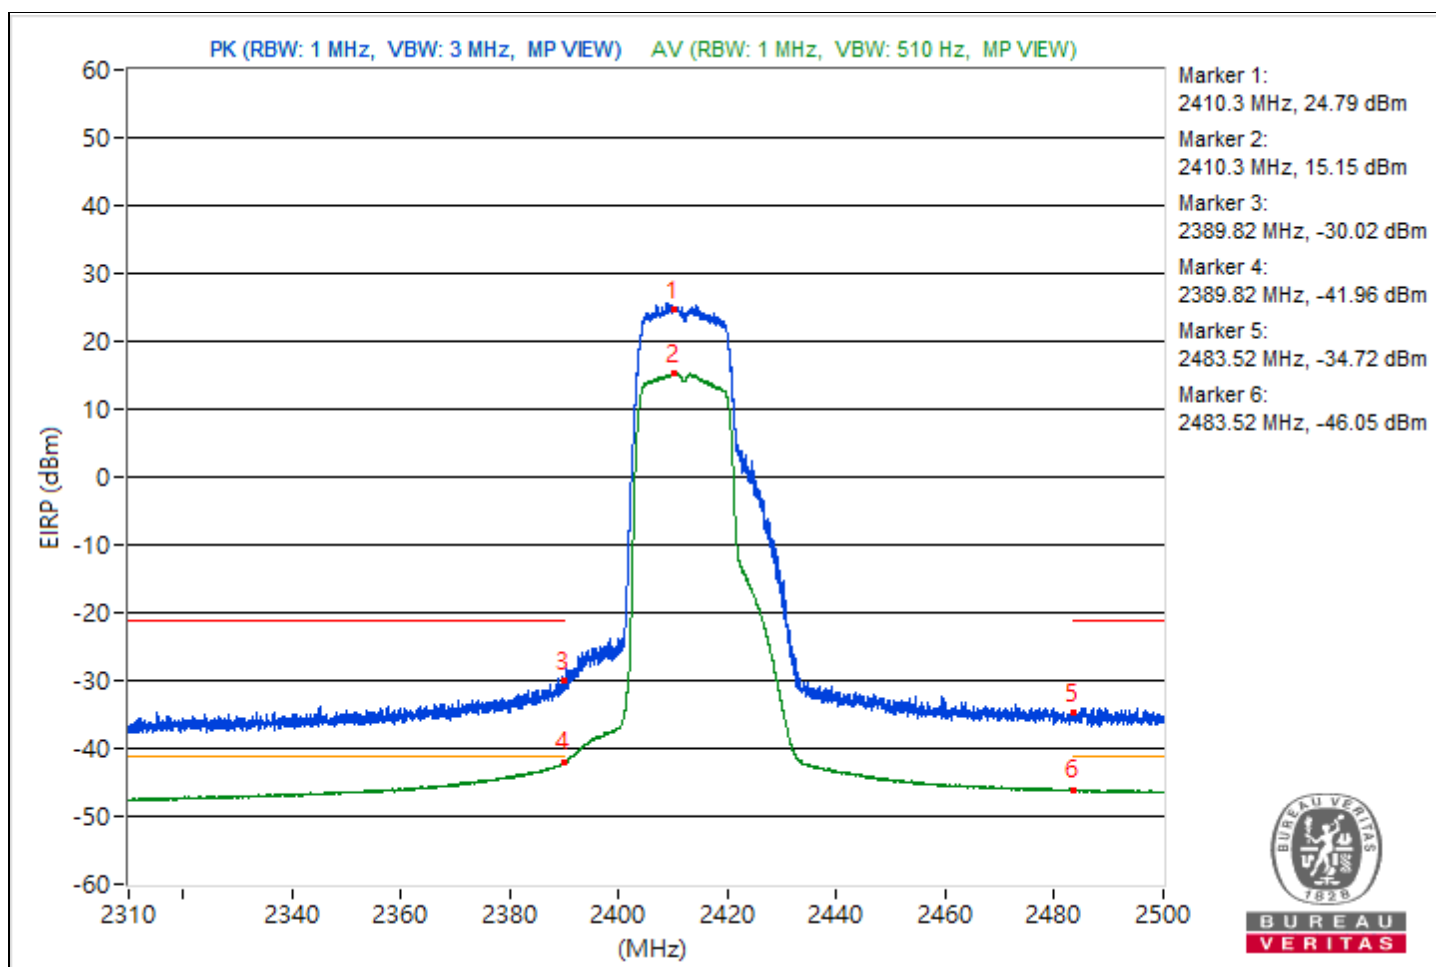


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2435.66	124.51 PK			16.96	17.1	9.2	29.25
2	*2435.66	116.33 AV			9.02	8.69	9.2	21.07
3	2389.63	63.09 PK	74	-10.91	-43.3	-45.82	9.2	-32.17
4	2389.63	52.9 AV	54	-1.1	-54.18	-55	9.2	-42.36
5	2483.68	62.03 PK	74	-11.97	-45.05	-45.88	9.2	-33.23
6	2483.68	53.09 AV	54	-0.91	-54.07	-54.72	9.2	-42.17

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

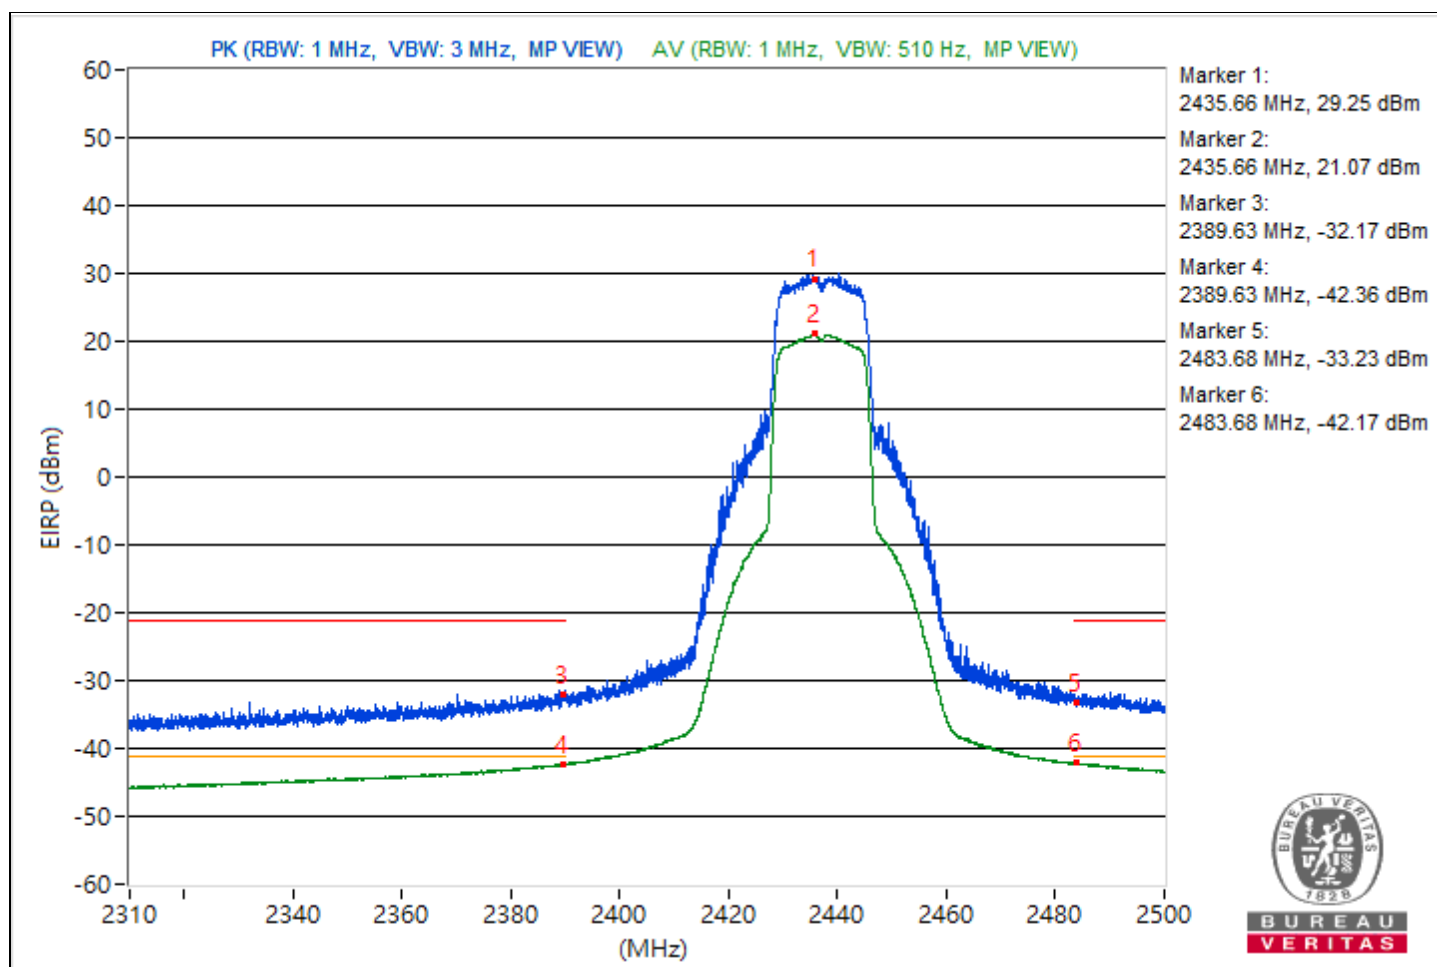


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2460.57	120.64 PK			13.4	12.92	9.2	25.38
2	*2460.57	111.17 AV			3.74	3.67	9.2	15.91
3	2389.56	60.59 PK	74	-13.41	-45.7	-48.5	9.2	-34.67
4	2389.56	48.96 AV	54	-5.04	-58.54	-58.48	9.2	-46.3
5	2483.52	63.58 PK	74	-10.42	-43.92	-43.86	9.2	-31.68
6	2483.52	53.01 AV	54	-0.99	-54.25	-54.68	9.2	-42.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

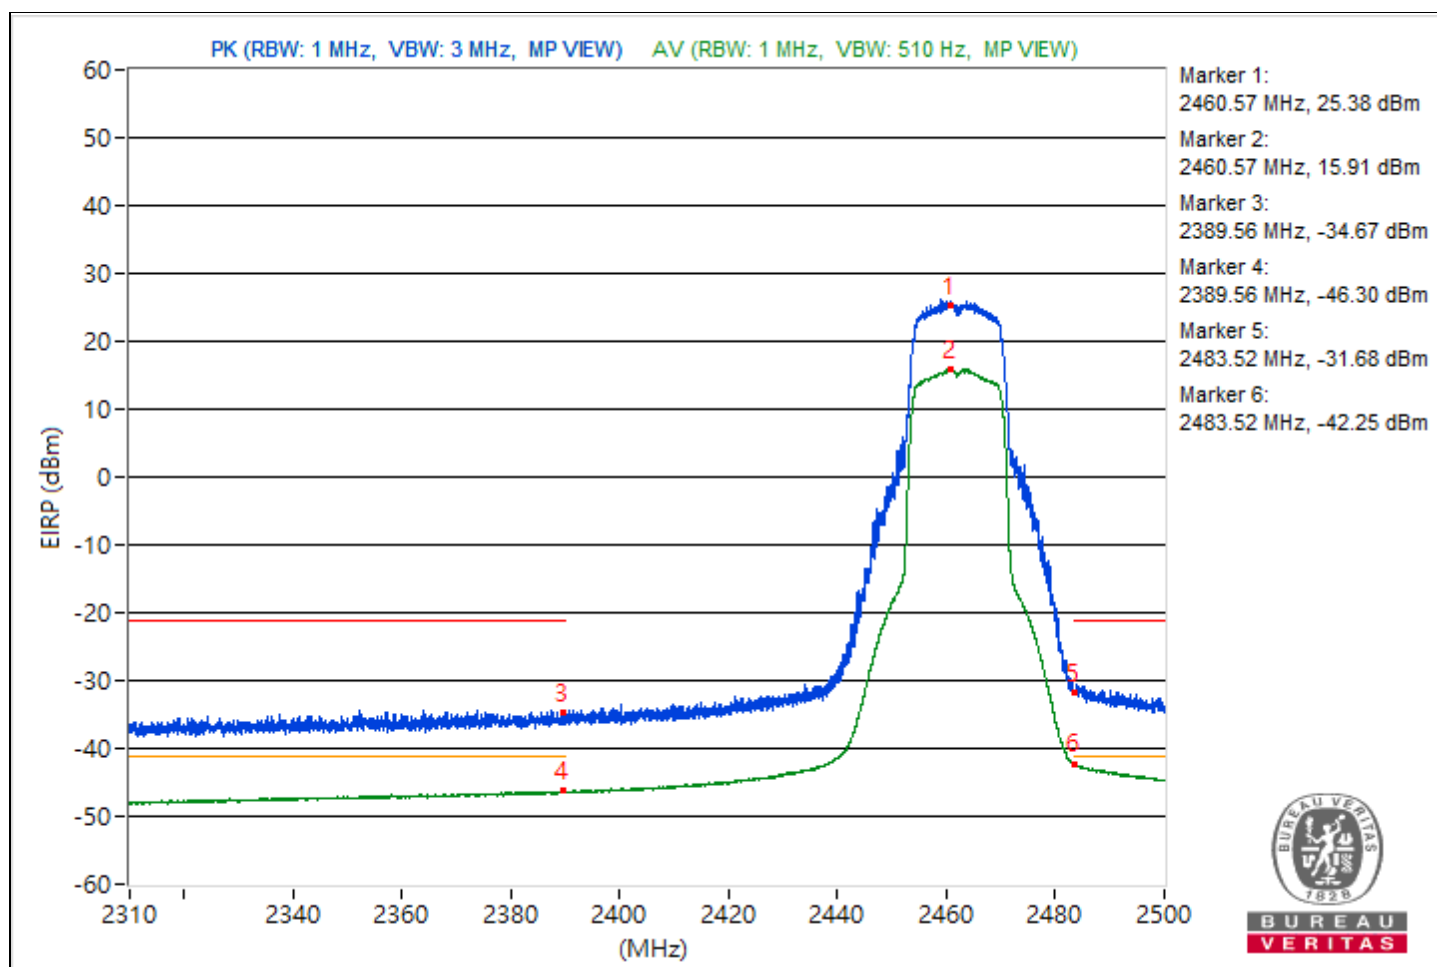


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2466.04	118.19 PK			11.06	10.35	9.2	22.93
2	*2466.04	109.12 AV			1.94	1.34	9.2	13.86
3	2388.92	59.14 PK	74	-14.86	-47.99	-48.7	9.2	-36.12
4	2388.92	48.54 AV	54	-5.46	-58.94	-58.92	9.2	-46.72
5	2483.52	64.66 PK	74	-9.34	-42.03	-43.76	9.2	-30.6
6	2483.52	53.5 AV	54	-0.5	-53.51	-54.48	9.2	-41.76

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

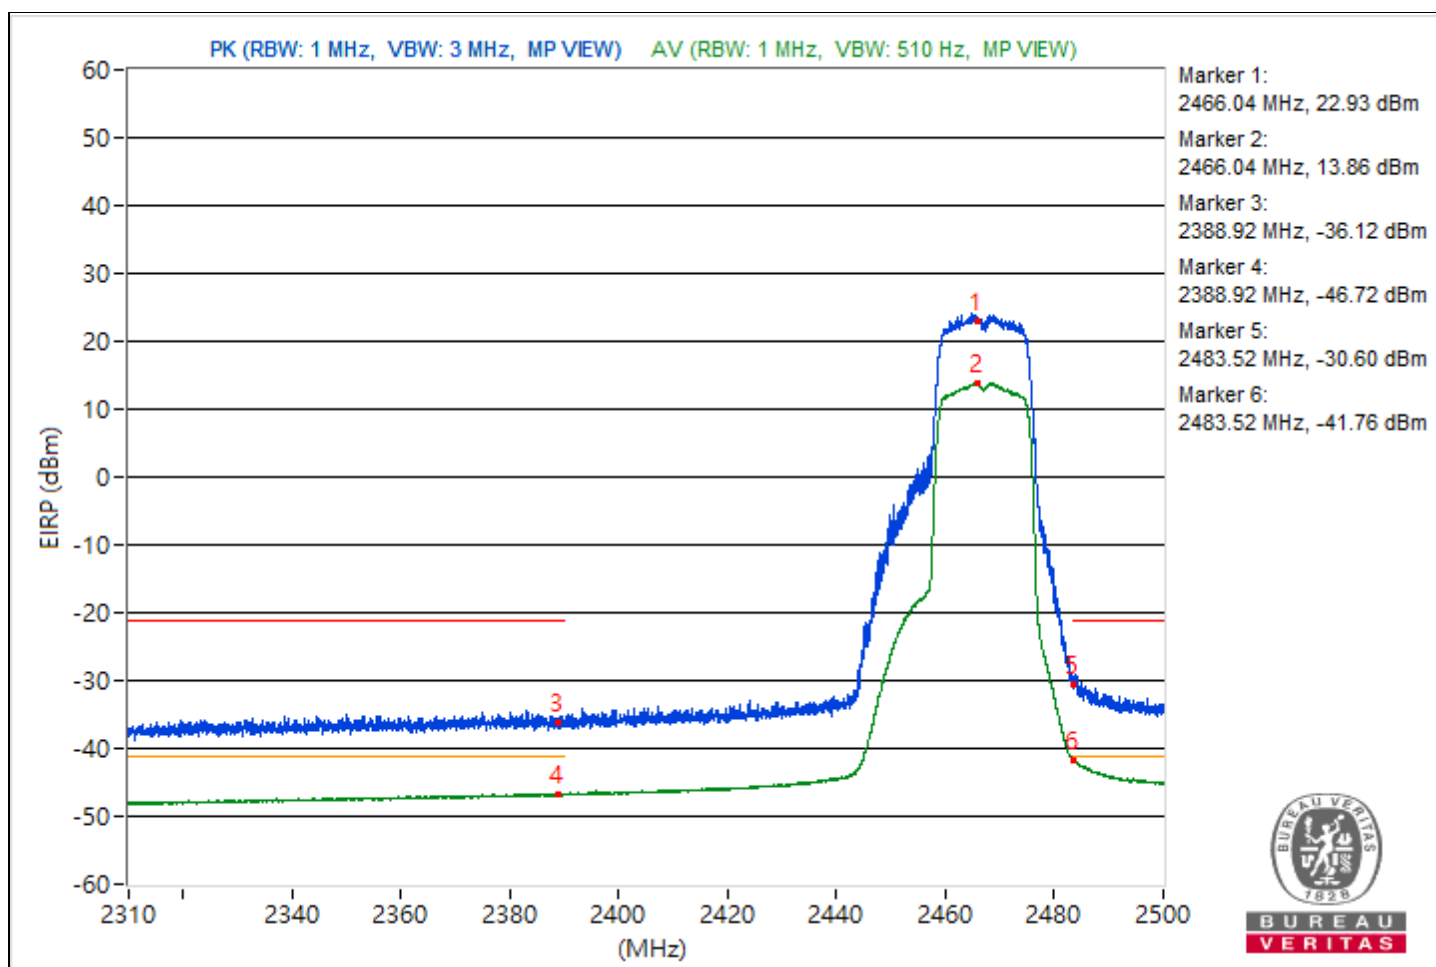

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		


Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	63.11 PK	74	-10.89	-42.64	-47.26	9.2	-32.15
2	2483.5	53.37 AV	54	-0.63	-52.54	-56.57	9.2	-41.89

Notes:


1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

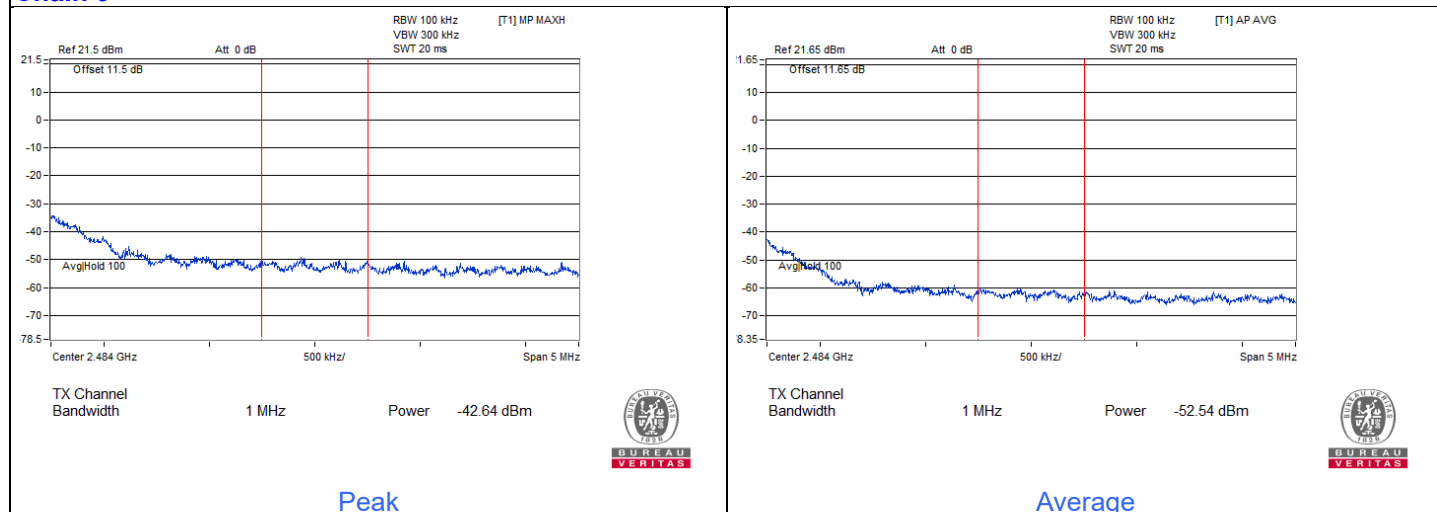

Chain 1

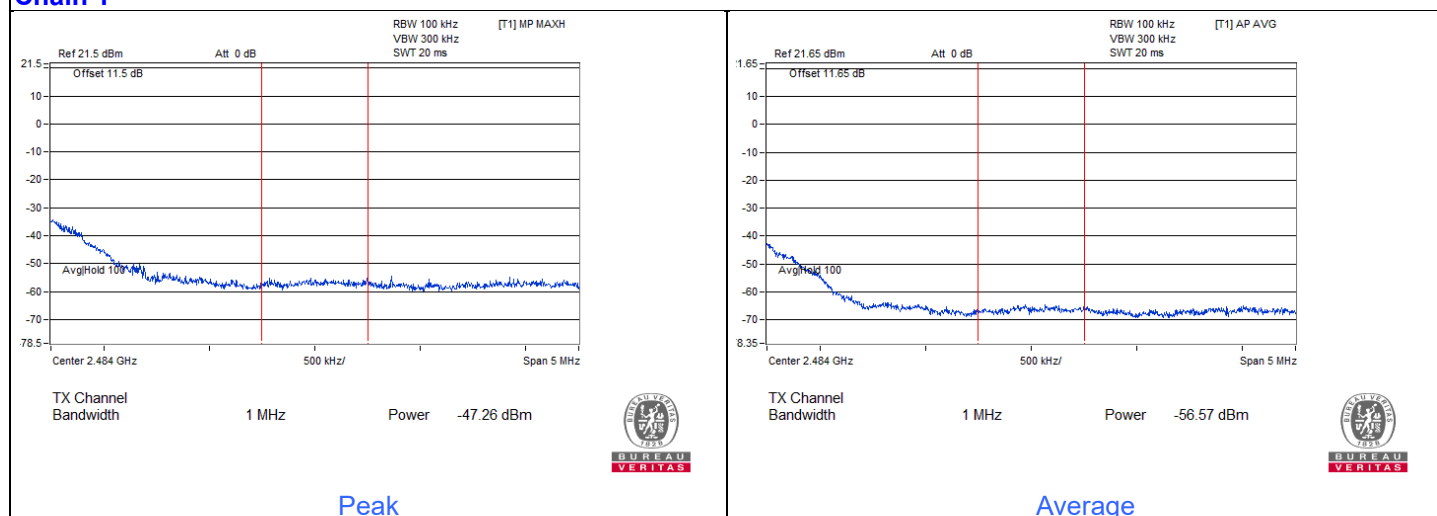


2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2410.77	118.58 PK			13.68	14.53	6.19	23.32
2	*2410.77	108.29 AV			3.88	3.77	6.19	13.03
3	2389.94	66.23 PK	74	-7.77	-38.13	-38.33	6.19	-29.03
4	2389.94	52.84 AV	54	-1.16	-51.6	-51.65	6.19	-42.42
5	2484.18	57.93 PK	74	-16.07	-47.04	-46.07	6.19	-37.33
6	2484.18	46.35 AV	54	-7.65	-58.2	-58.03	6.19	-48.91

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

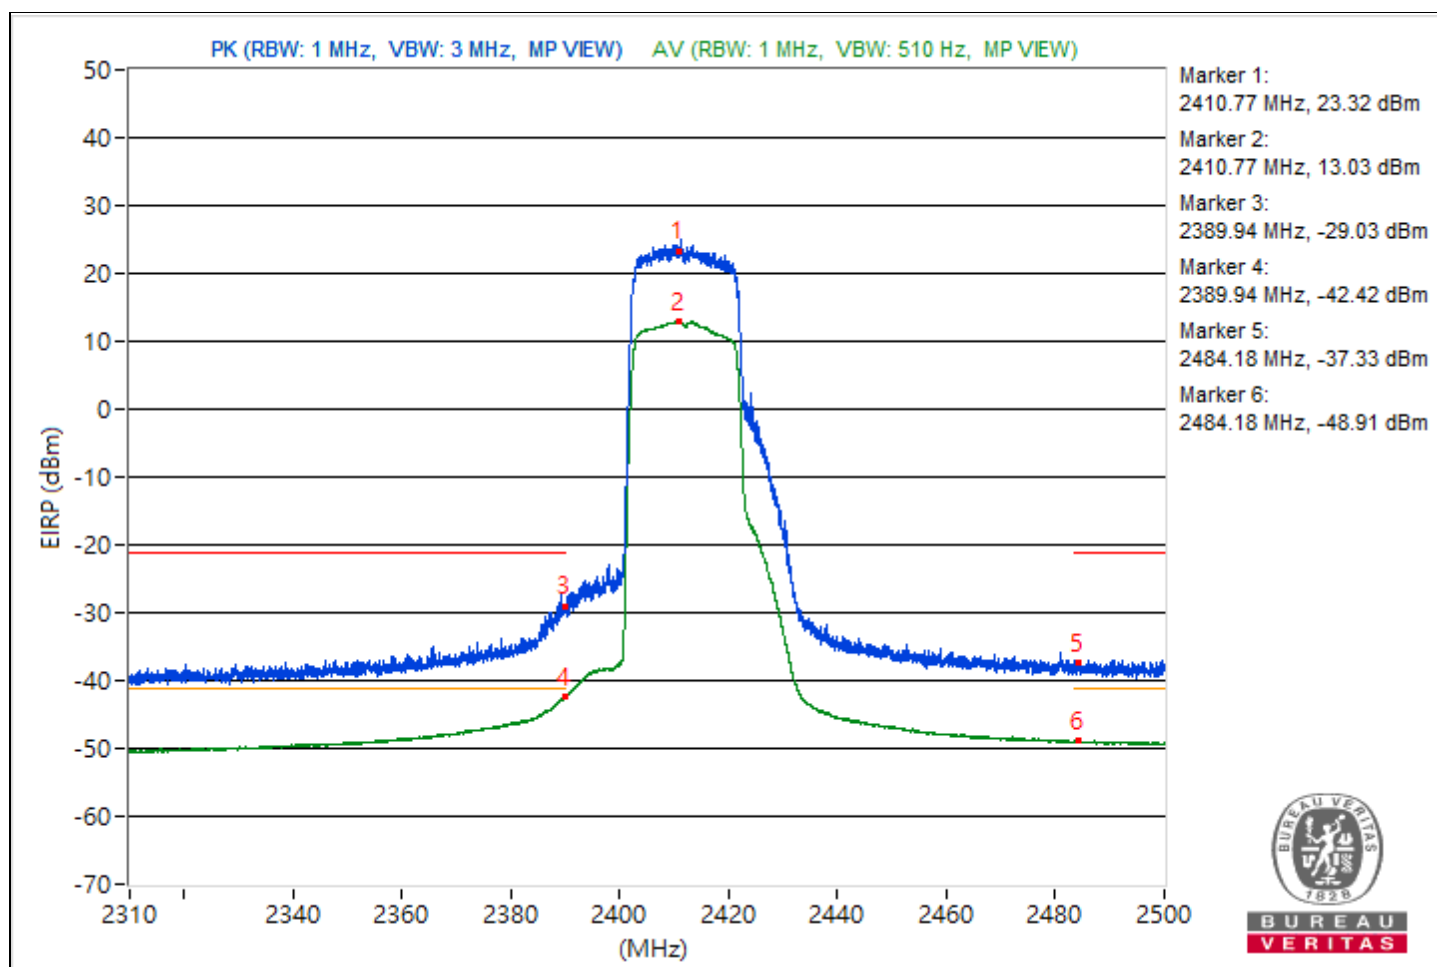


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2435.97	121.72 PK			17.81	16.62	6.19	26.46
2	*2435.97	113.6 AV			9.3	8.98	6.19	18.34
3	2389.8	66.04 PK	74	-7.96	-37.47	-39.64	6.19	-29.22
4	2389.8	51.8 AV	54	-2.2	-51.93	-53.53	6.19	-43.46
5	2484.14	62.64 PK	74	-11.36	-42.08	-41.57	6.19	-32.62
6	2484.14	51.75 AV	54	-2.25	-52.13	-53.38	6.19	-43.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

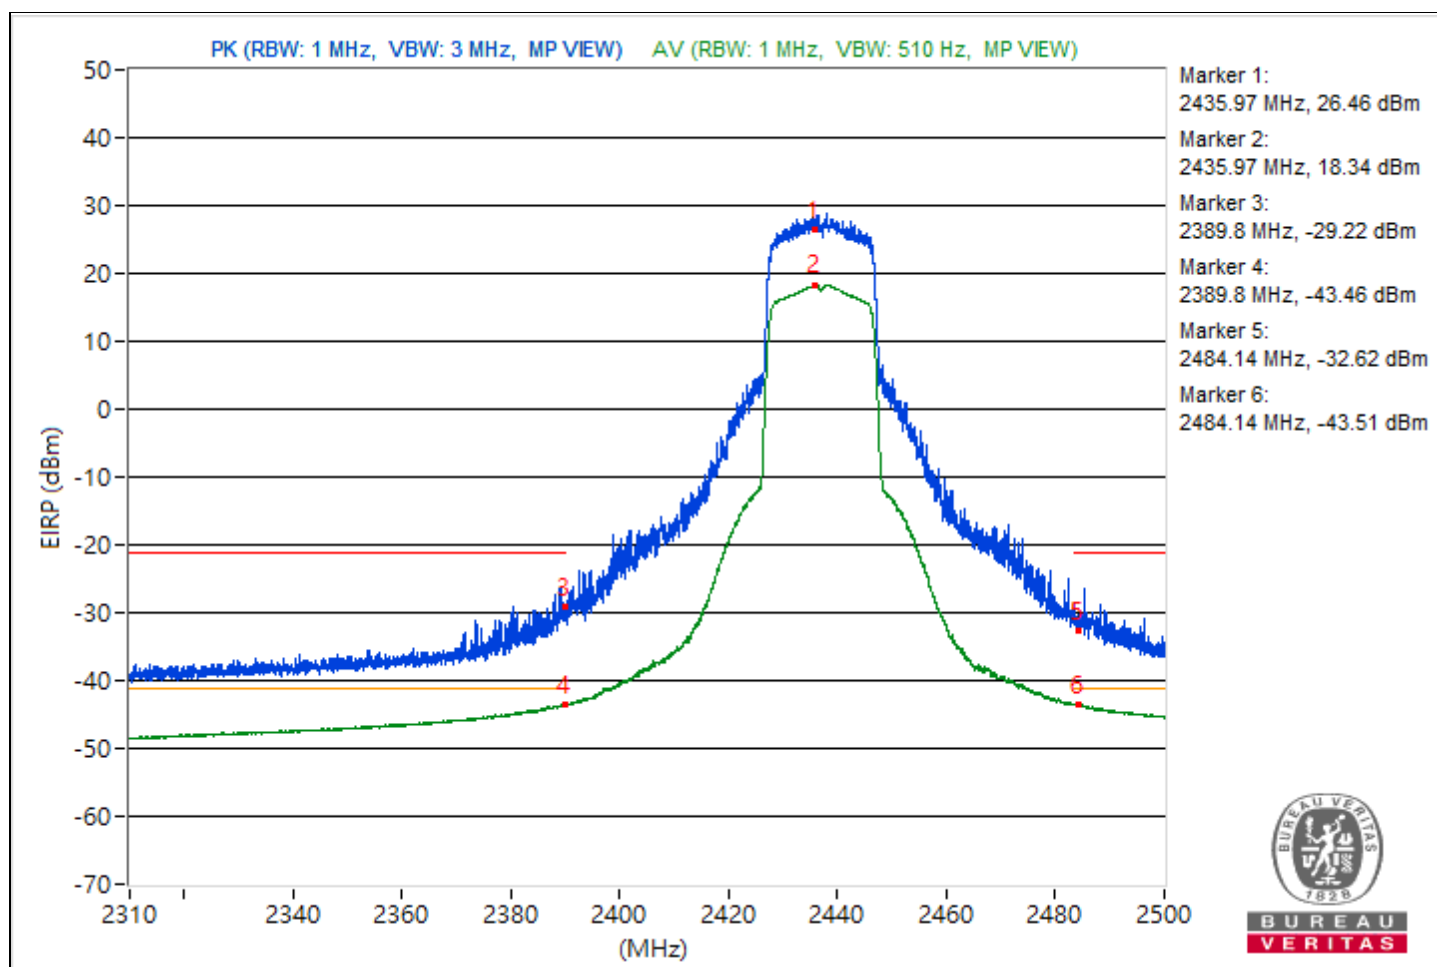


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2460.62	119.85 PK			15.9	14.82	6.19	24.59
2	*2460.62	109.91 AV			5.68	5.2	6.19	14.65
3	2389.21	56.34 PK	74	-17.66	-47.63	-48.66	6.19	-38.92
4	2389.21	46.46 AV	54	-7.54	-57.87	-58.12	6.19	-48.8
5	2483.52	66.84 PK	74	-7.16	-36.36	-39.42	6.19	-28.42
6	2483.52	52.86 AV	54	-1.14	-51.1	-52.16	6.19	-42.4

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

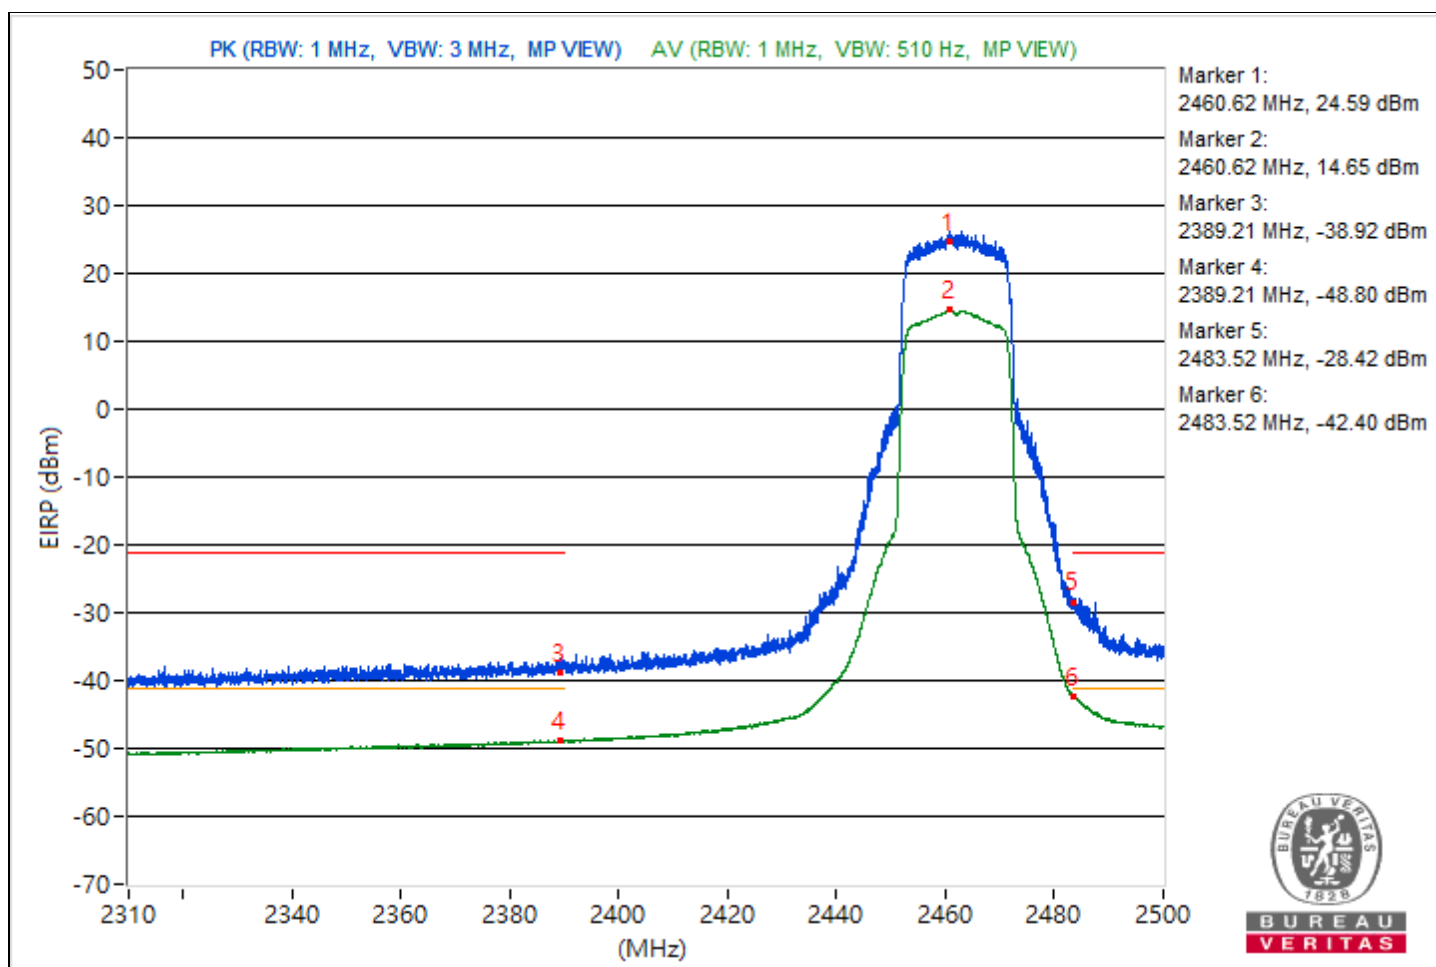


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2465.97	117.67 PK			12.68	13.67	6.19	22.41
2	*2465.97	106.79 AV			2.58	2.07	6.19	11.53
3	2387.9	57.67 PK	74	-16.33	-47.06	-46.52	6.19	-37.59
4	2387.9	45.81 AV	54	-8.19	-58.46	-58.84	6.19	-49.45
5	2483.54	66.1 PK	74	-7.9	-39.57	-37.42	6.19	-29.16
6	2483.54	53.1 AV	54	-0.9	-51.53	-51.2	6.19	-42.16

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

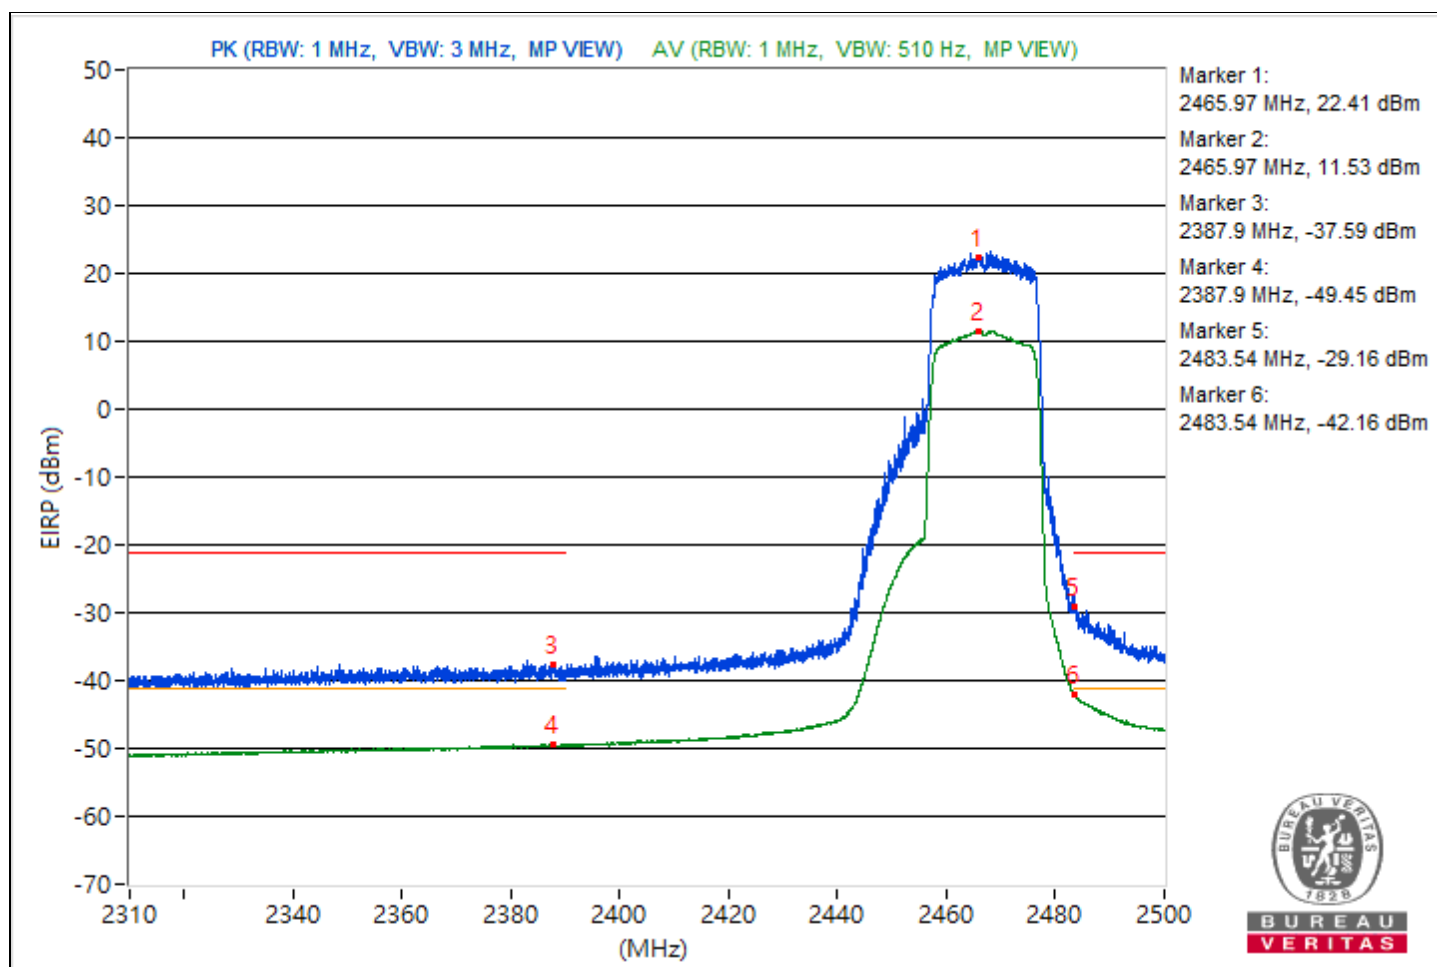

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		


Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	63.72 PK	74	-10.28	-40.34	-41.18	6.19	-31.54
2	2483.5	5347 AV	54	-0.53	-50.64	-51.38	6.19	-41.79

Notes:


1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

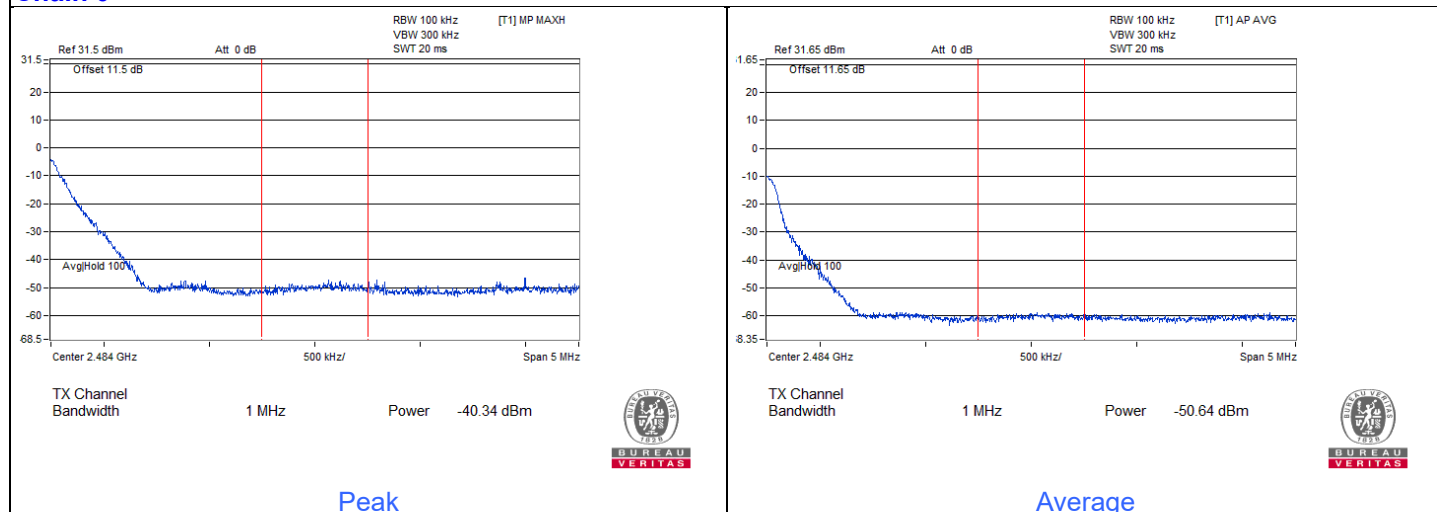

Chain 1

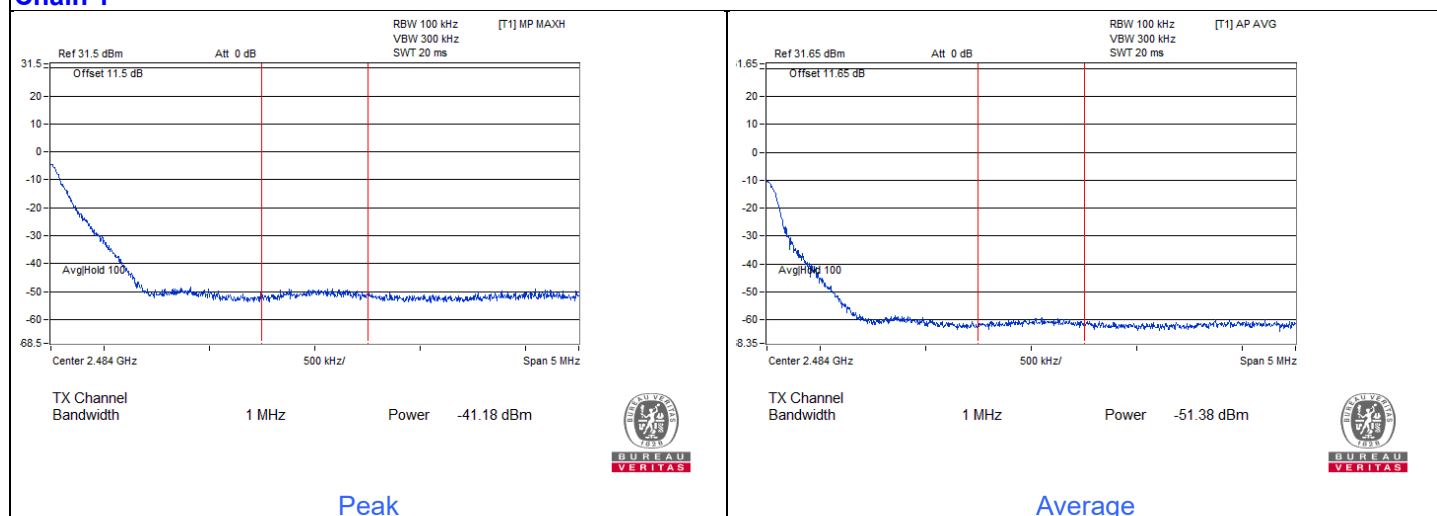


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2420.72	114.74 PK			11.03	9.36	6.19	19.48
2	*2420.72	103.69 AV			-0.58	-0.96	6.19	8.43
3	2389.94	64.14 PK	74	-9.86	-41.74	-39.25	6.19	-31.12
4	2389.94	53.38 AV	54	-0.62	-51.18	-50.98	6.19	-41.88
5	2484.47	57.55 PK	74	-16.45	-46.57	-47.29	6.19	-37.71
6	2484.47	46.86 AV	54	-7.14	-57.62	-57.58	6.19	-48.4

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

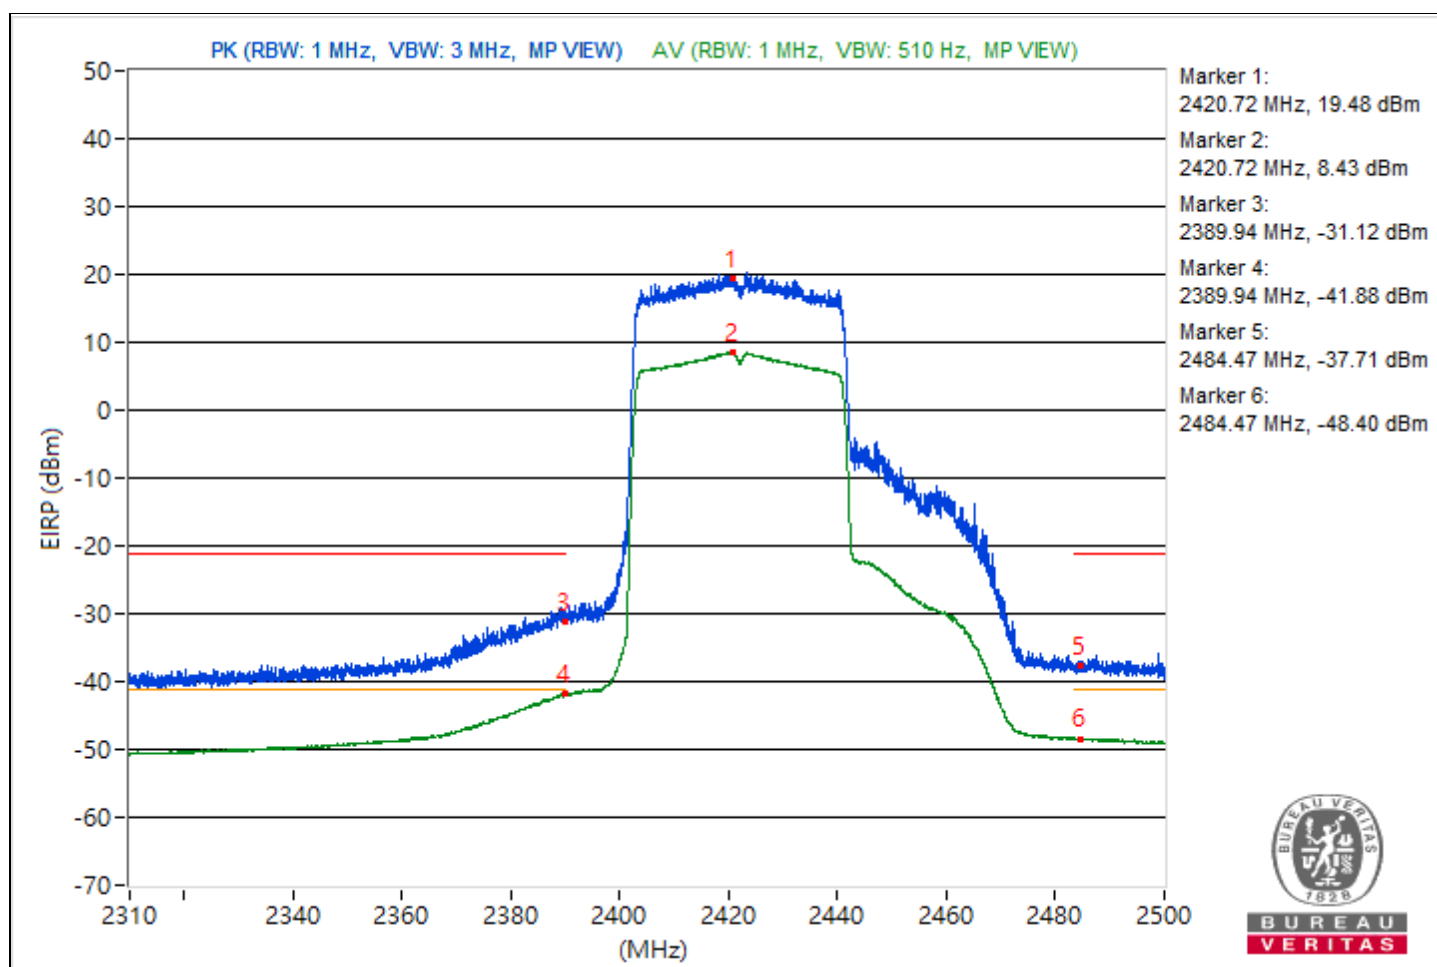


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2438.25	117.14 PK			12.59	12.77	6.19	21.88
2	*2438.25	106.81 AV			2.44	2.27	6.19	11.55
3	2389.97	66.96 PK	74	-7.04	-36.94	-38.15	6.19	-28.3
4	2389.97	53.07 AV	54	-0.93	-51.51	-51.28	6.19	-42.19
5	2483.52	64.34 PK	74	-9.66	-40.32	-39.92	6.19	-30.92
6	2483.52	52 AV	54	-2	-52.09	-52.86	6.19	-43.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

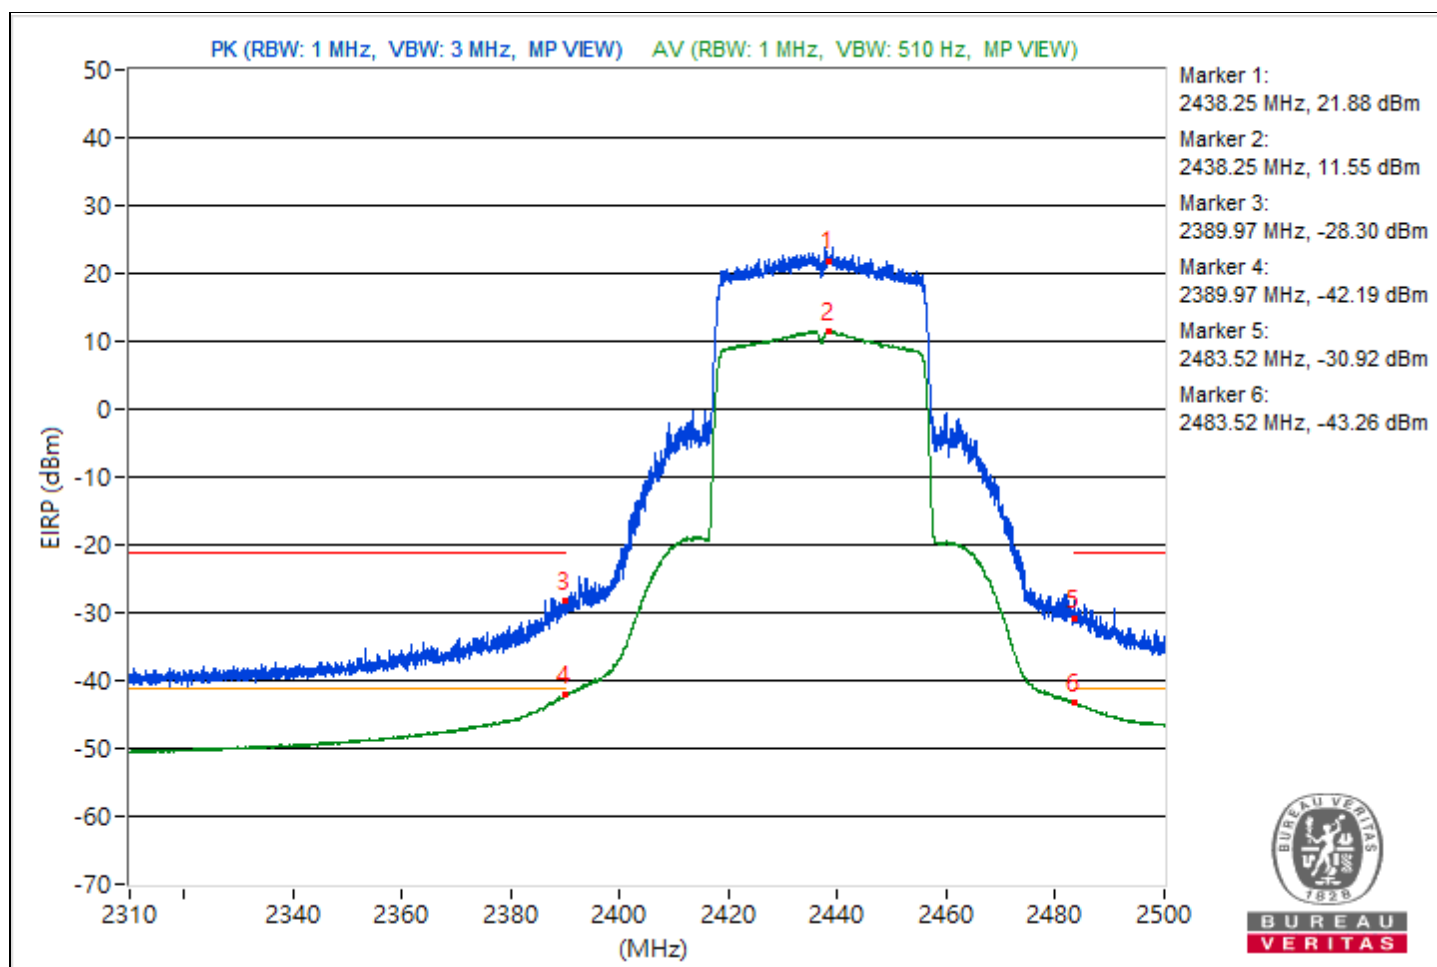


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2453.31	115.14 PK			10.56	10.8	6.19	19.88
2	*2453.31	105.16 AV			0.87	0.51	6.19	9.9
3	2388.92	57.96 PK	74	-16.04	-47	-46.05	6.19	-37.3
4	2388.92	47.62 AV	54	-6.38	-57.04	-56.65	6.19	-47.64
5	2484.02	63.31 PK	74	-10.69	-40.68	-41.69	6.19	-31.95
6	2484.02	52.87 AV	54	-1.13	-51.16	-52.07	6.19	-42.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

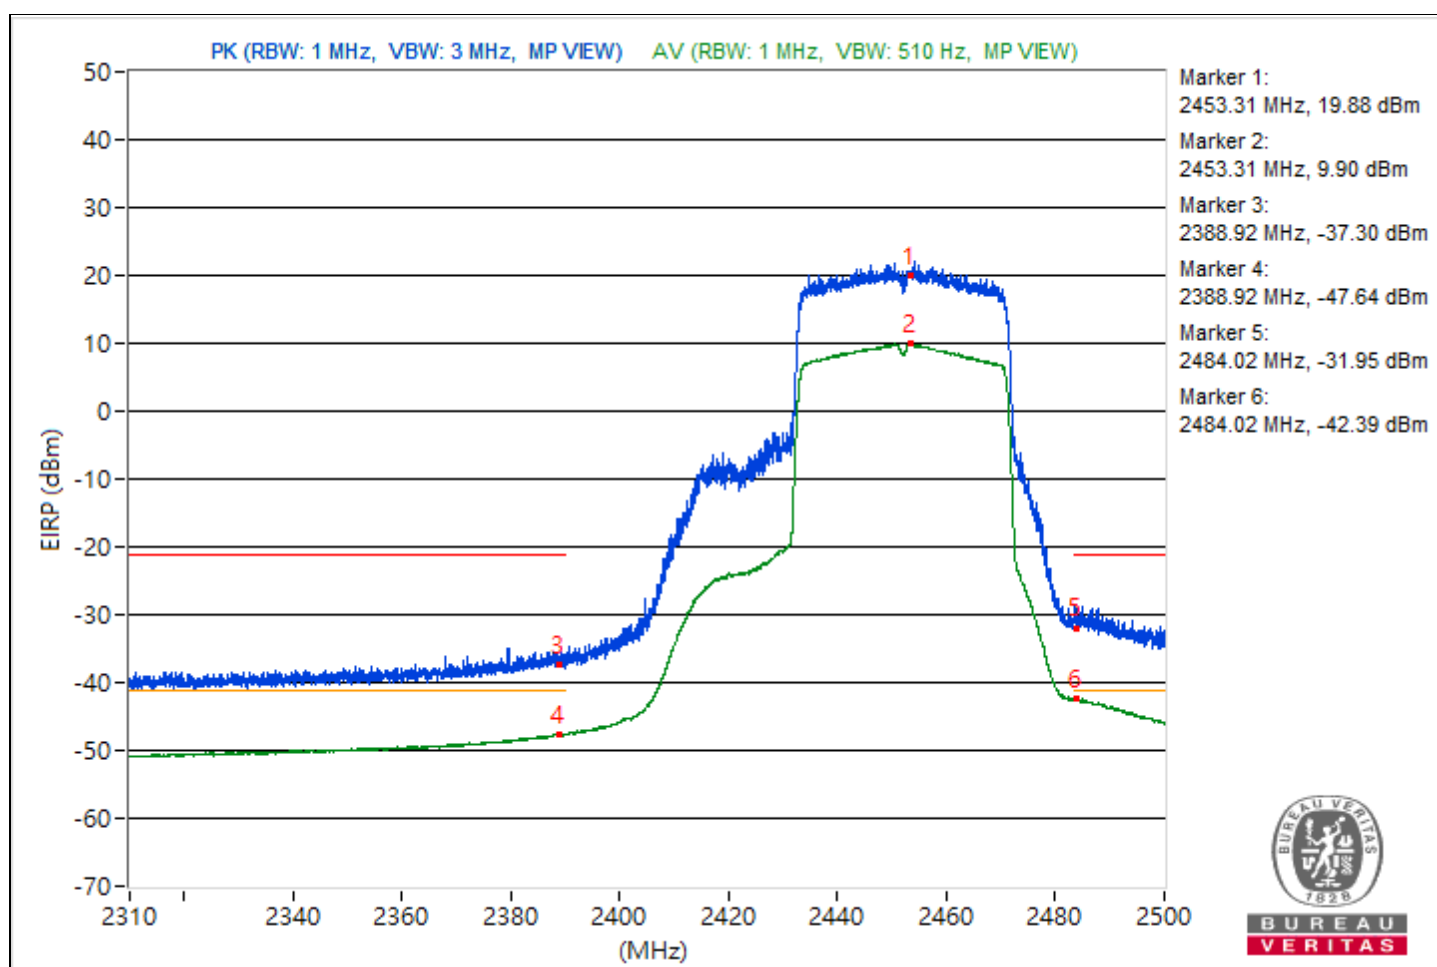


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2455.75	115.59 PK			10.95	11.31	6.19	20.33
2	*2455.75	104.62 AV			0.44	-0.13	6.19	9.36
3	2389.92	57.93 PK	74	-16.07	-46.33	-46.75	6.19	-37.33
4	2389.92	47.02 AV	54	-6.98	-57.45	-57.44	6.19	-48.24
5	2484.44	64.13 PK	74	-9.87	-39.26	-41.76	6.19	-31.13
6	2484.44	52.71 AV	54	-1.29	-51.12	-52.49	6.19	-42.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

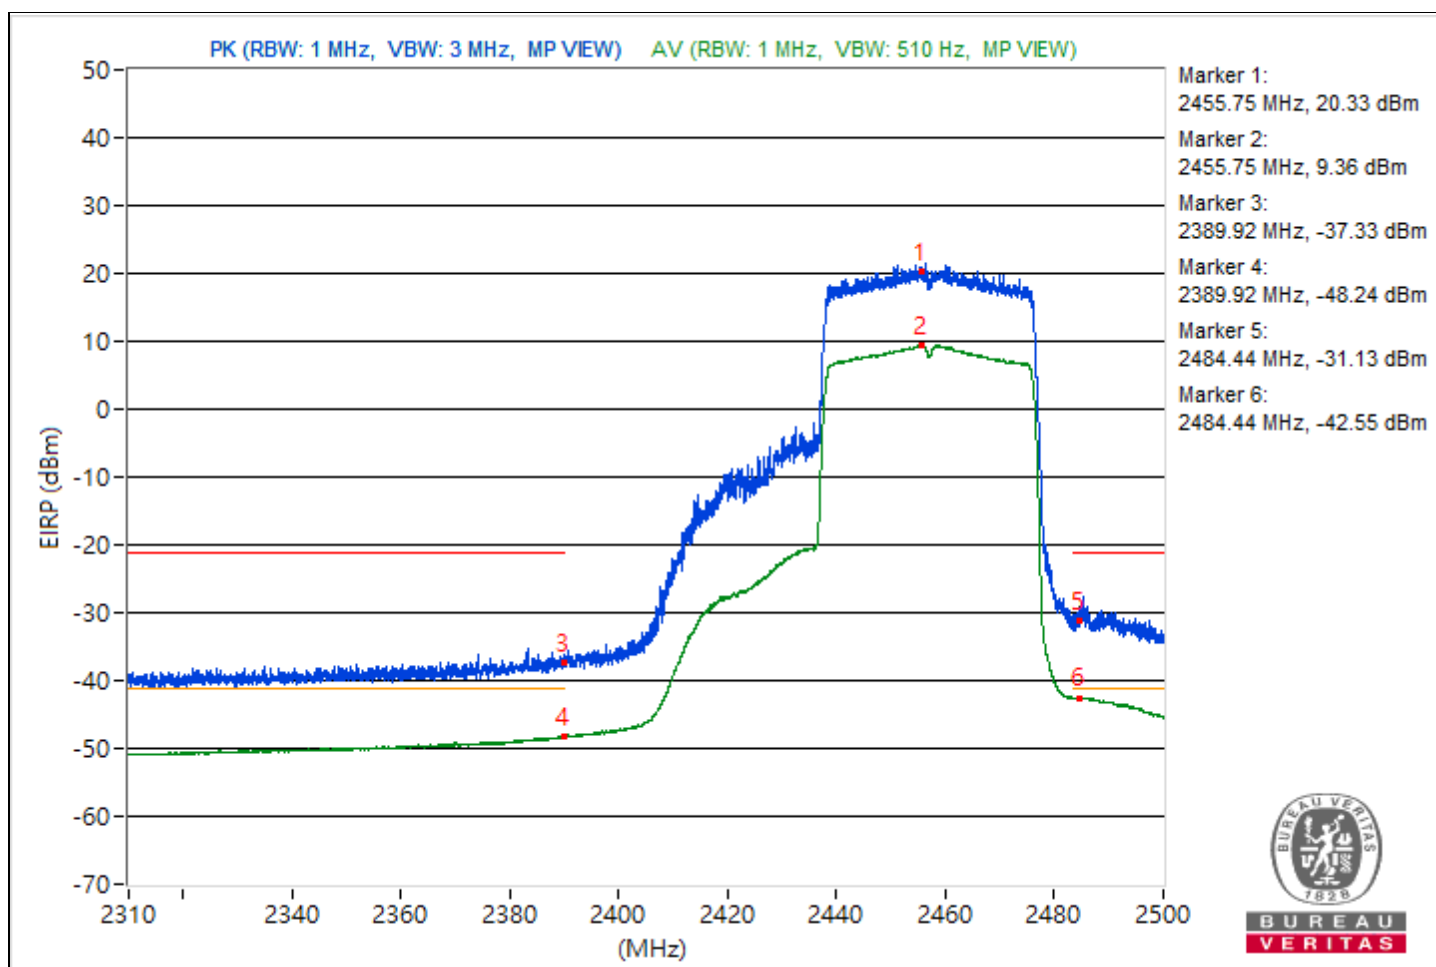


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	24°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2460.41	115.02 PK			10.63	10.48	6.19	19.76
2	*2460.41	104.14 AV			-0.23	-0.42	6.19	8.88
3	2389.44	56.95 PK	74	-17.05	-47.97	-47.1	6.19	-38.31
4	2389.44	46.62 AV	54	-7.38	-57.91	-57.78	6.19	-48.64
5	2486.15	66.82 PK	74	-7.18	-38.94	-36.64	6.19	-28.44
6	2486.15	53.09 AV	54	-0.91	-50.99	-51.78	6.19	-42.17

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

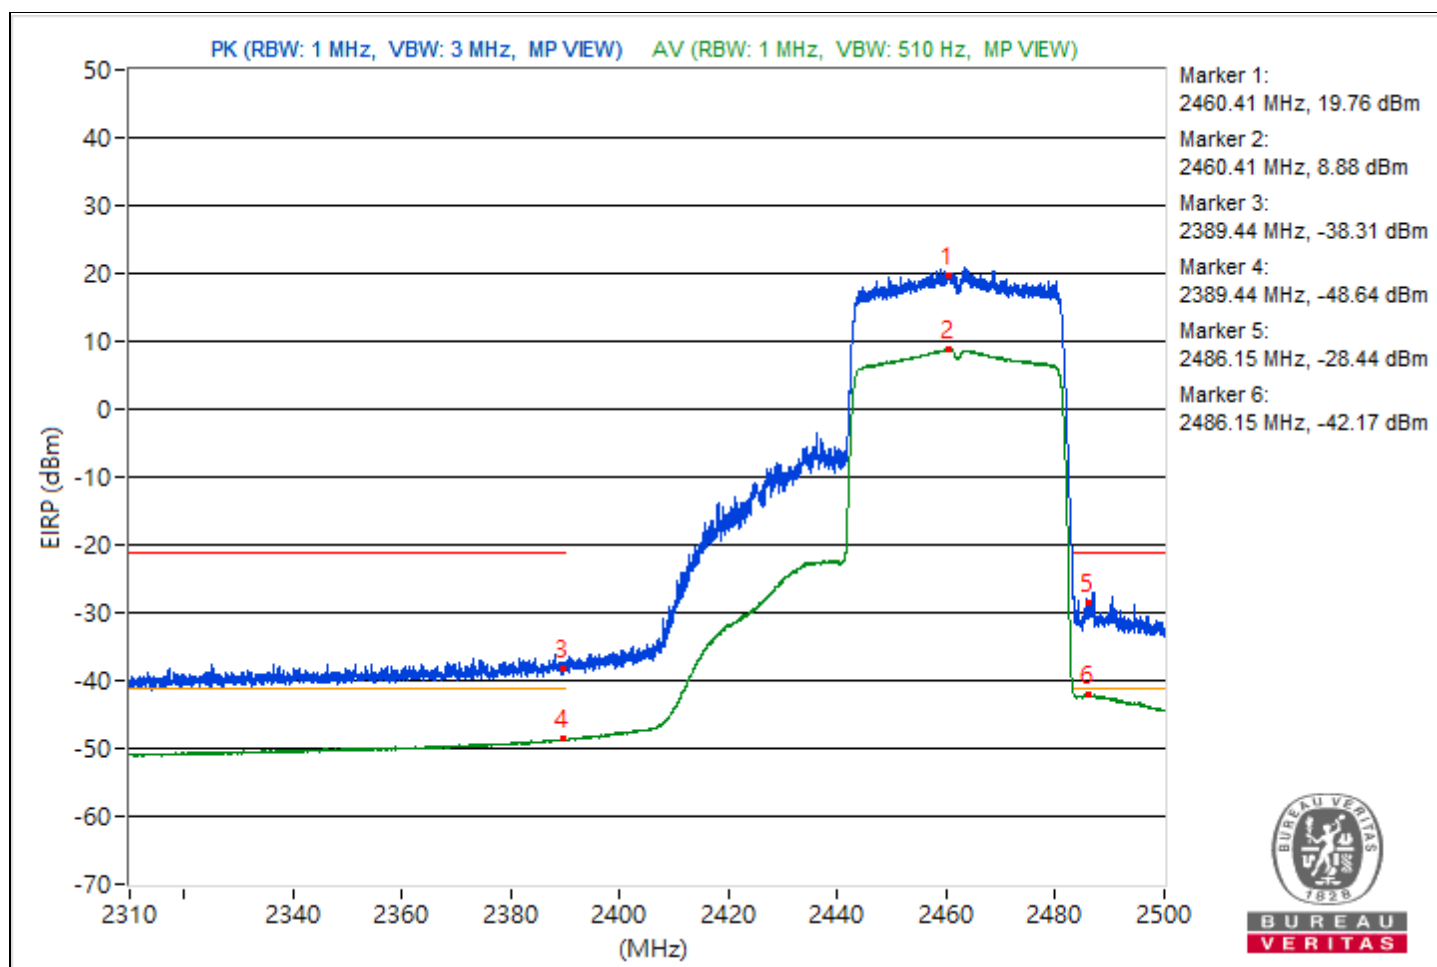


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2403.55	127.47 PK			22.4	23.55	6.19	32.21
2	*2403.62	116.34 AV			12.29	11.43	6.19	21.08
3	2386.71	71.27 PK	74	-2.73	-38.02	-30.96	6.19	-23.99
4	2386.55	53.46 AV	54	-0.54	-51.68	-50.41	6.19	-41.8
5	2487.22	58.09 PK	74	-15.91	-45.2	-47.98	6.19	-37.17
6	2483.87	47.09 AV	54	-6.91	-57.64	-57.11	6.19	-48.17

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

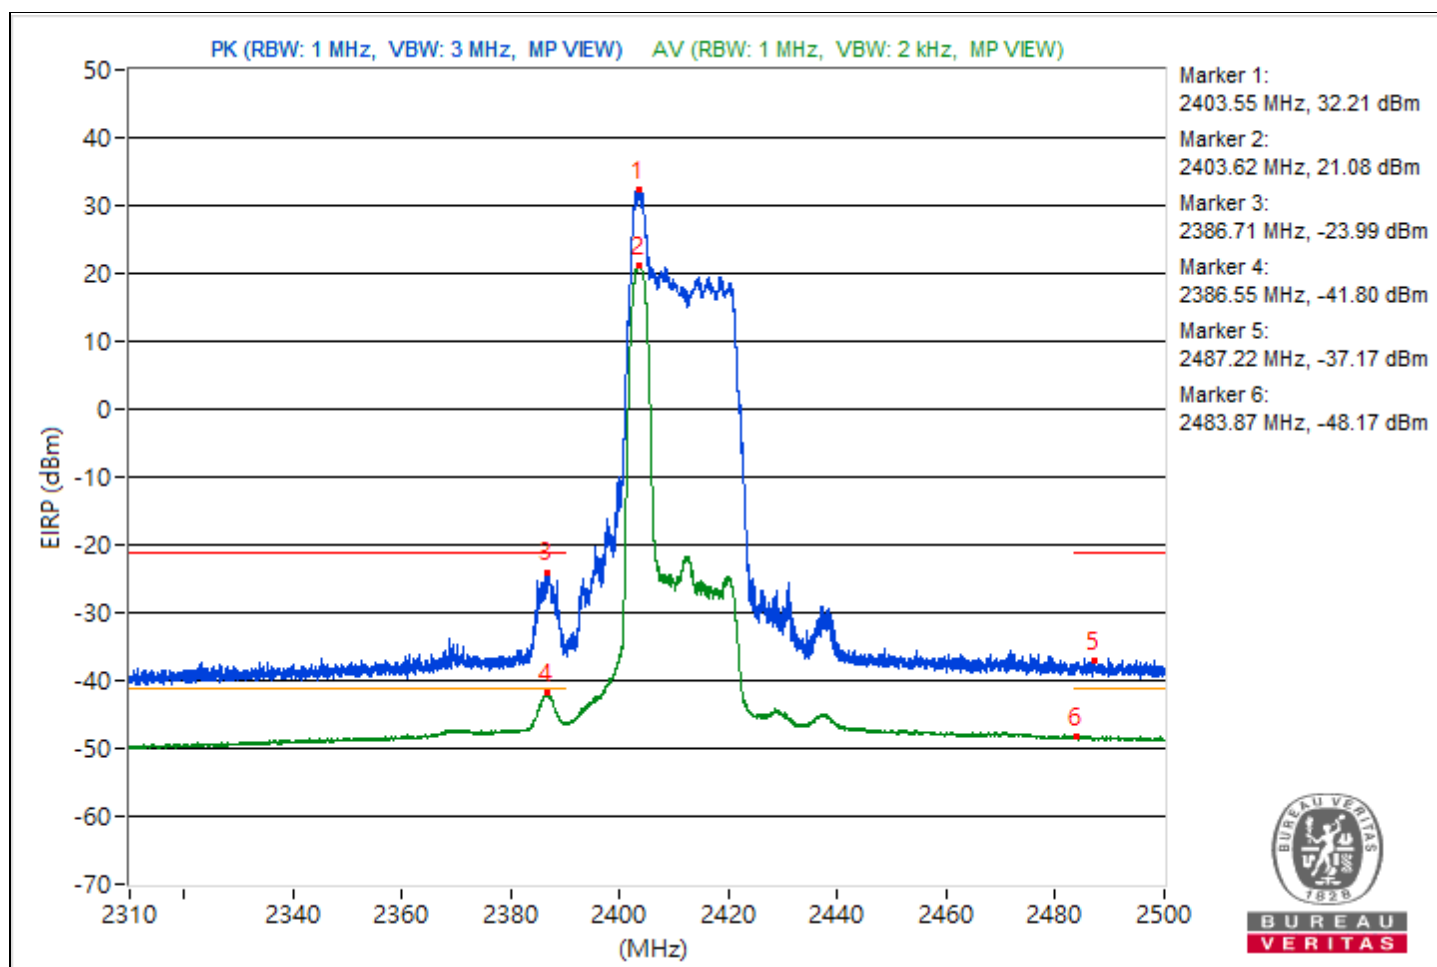


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2428.63	130.95 PK			26.97	25.95	6.19	35.69
2	*2428.66	121.39 AV			16.99	16.87	6.19	26.13
3	2389.97	71.73 PK	74	-2.27	-32.6	-32.87	6.19	-23.53
4	2389.49	49.53 AV	54	-4.47	-54.98	-54.89	6.19	-45.73
5	2483.66	72.3 PK	74	-1.7	-31.61	-32.78	6.19	-22.96
6	2497.17	50.28 AV	54	-3.72	-54.8	-53.63	6.19	-44.98

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

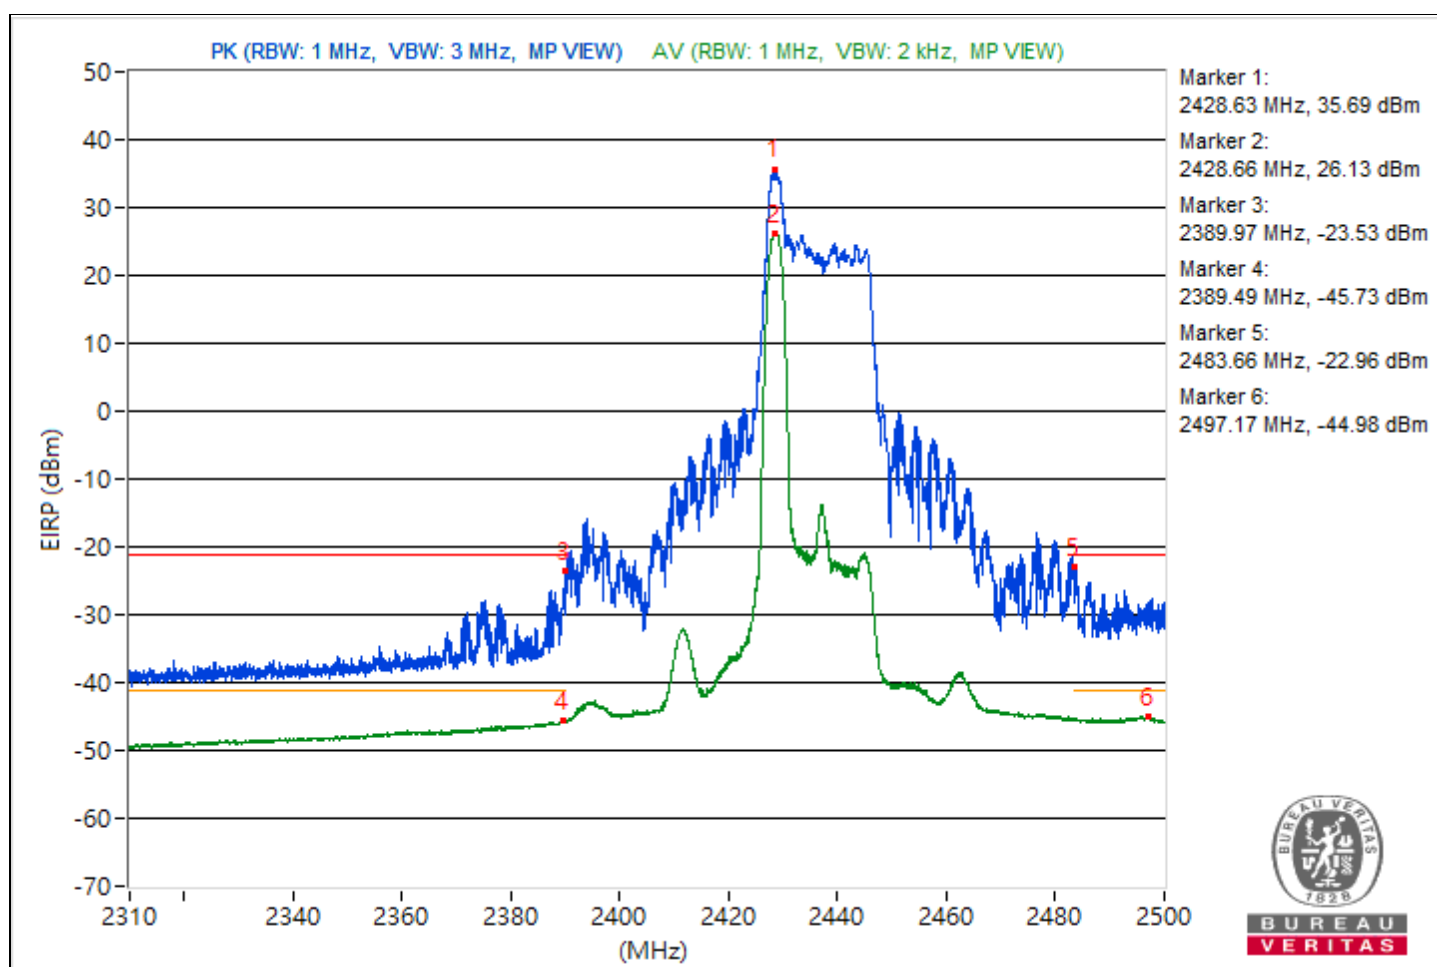


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2470.24	127.67 PK			23.73	22.62	6.19	32.41
2	*2470.69	116.58 AV			12.34	11.87	6.19	21.32
3	2369.66	57.69 PK	74	-16.31	-47.8	-45.95	6.19	-37.57
4	2387.71	46.67 AV	54	-7.33	-57.79	-57.79	6.19	-48.59
5	2487.03	71.21 PK	74	-2.79	-39.65	-30.77	6.19	-24.05
6	2487.32	53.34 AV	54	-0.66	-51.62	-50.67	6.19	-41.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

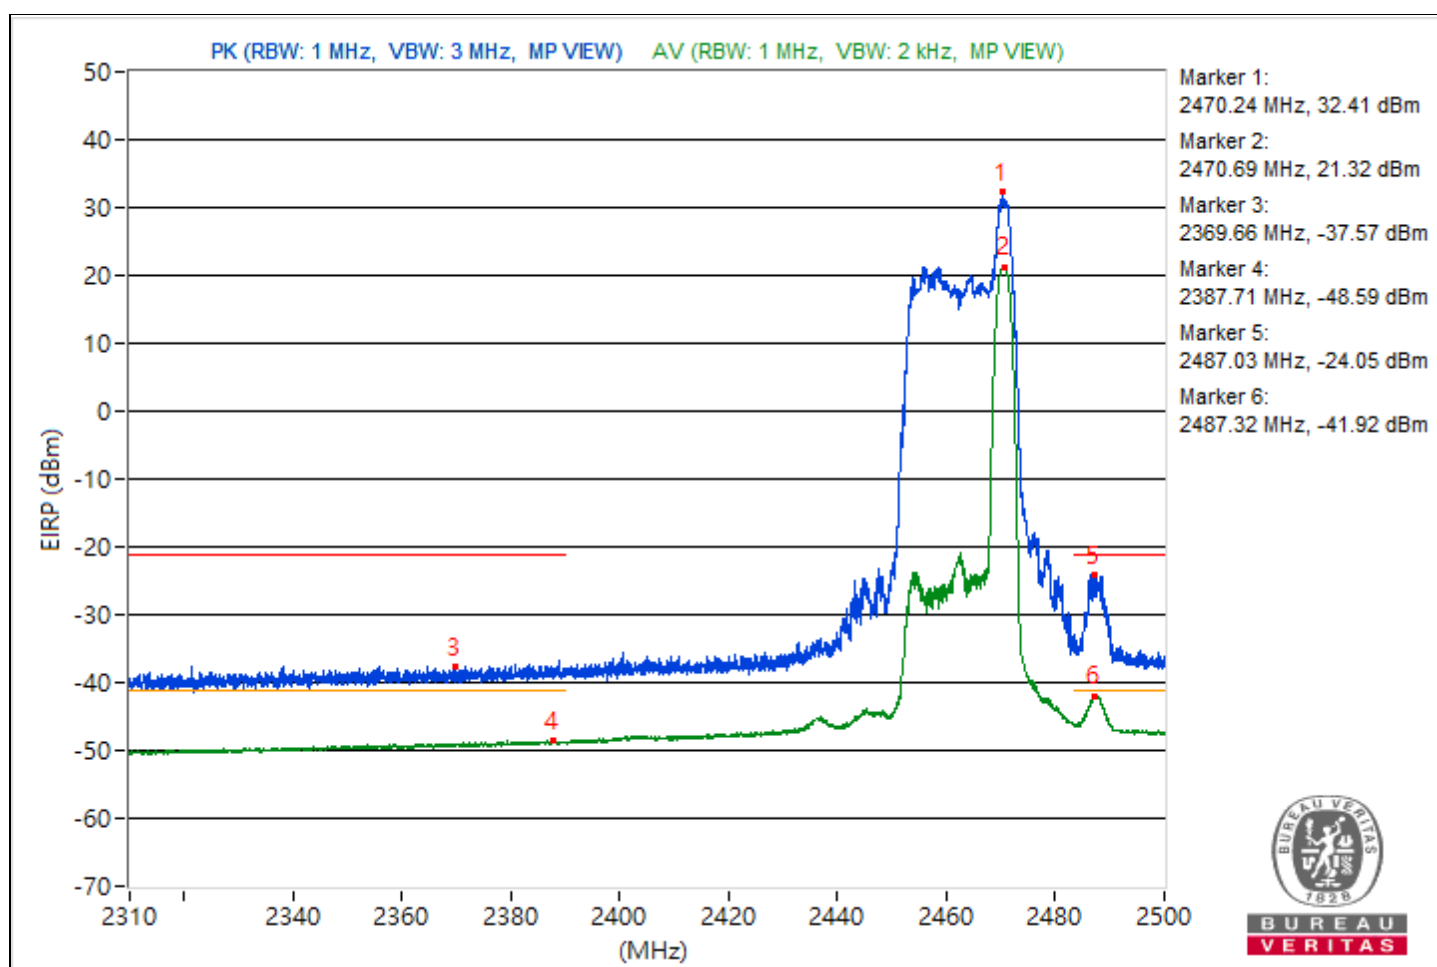


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.44	126.03 PK			22.84	19.75	6.19	30.77
2	*2475.59	115.6 AV			11.48	10.77	6.19	20.34
3	2374.91	57.69 PK	74	-16.31	-48.02	-45.8	6.19	-37.57
4	2387.07	46.61 AV	54	-7.39	-57.85	-57.86	6.19	-48.65
5	2483.68	72.57 PK	74	-1.43	-30.44	-34.08	6.19	-22.69
6	2492.3	51.97 AV	54	-2.03	-53.06	-51.98	6.19	-43.29

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

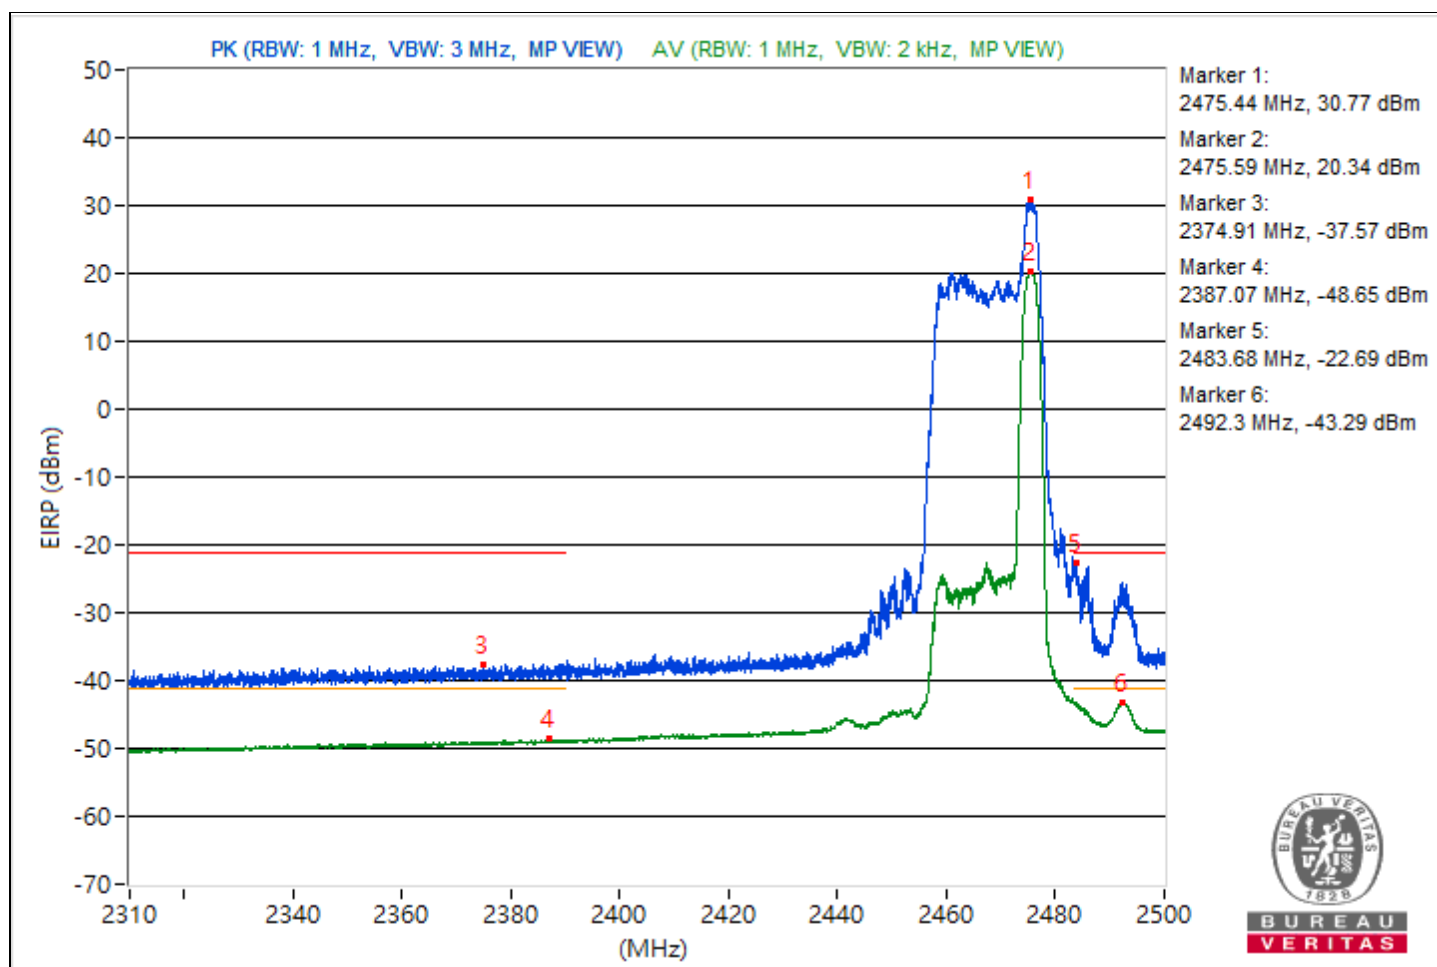

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		


Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	67.22 PK	74	-6.78	-36.83	-37.7	6.19	-28.04
2	2483.5	53.46 AV	54	-0.54	-50.93	-51.08	6.19	-41.8

Notes:


1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

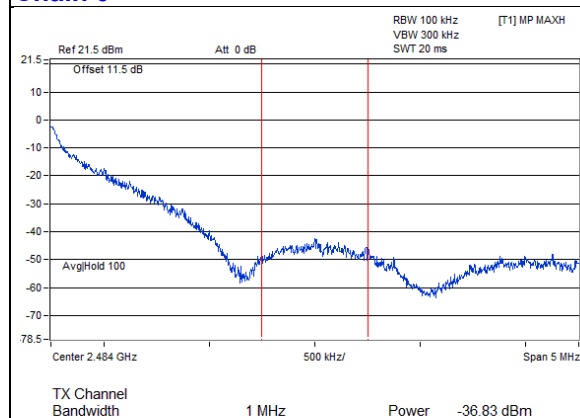


Peak

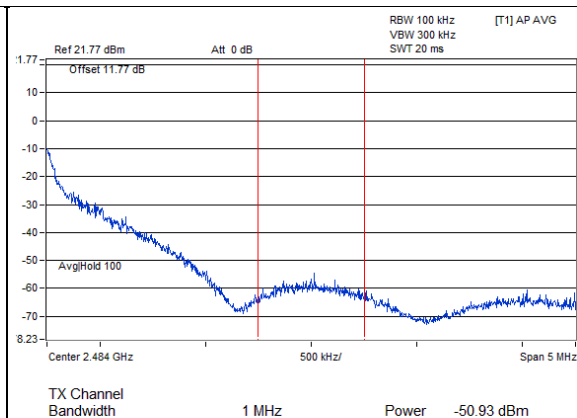


Average

Chain 1

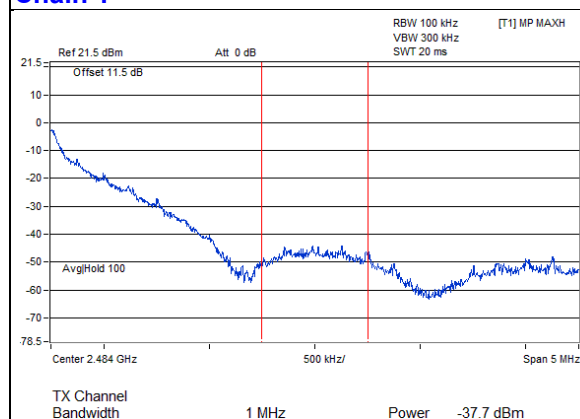

Peak

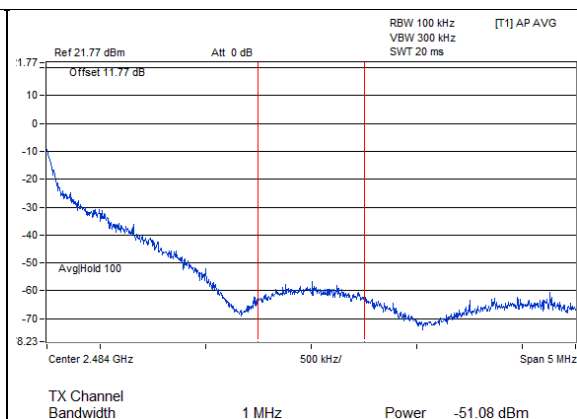


Average

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2403.95	125.22 PK			20.77	20.74	6.19	29.96
2	*2404.05	113.98 AV			9.66	9.38	6.19	18.72
3	2389.04	68.32 PK	74	-5.68	-40.94	-33.92	6.19	-26.94
4	2389.54	53.04 AV	54	-0.96	-52.35	-50.66	6.19	-42.22
5	2490.78	58.46 PK	74	-15.54	-45.29	-46.85	6.19	-36.8
6	2484.78	46.96 AV	54	-7.04	-57.32	-57.69	6.19	-48.3

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

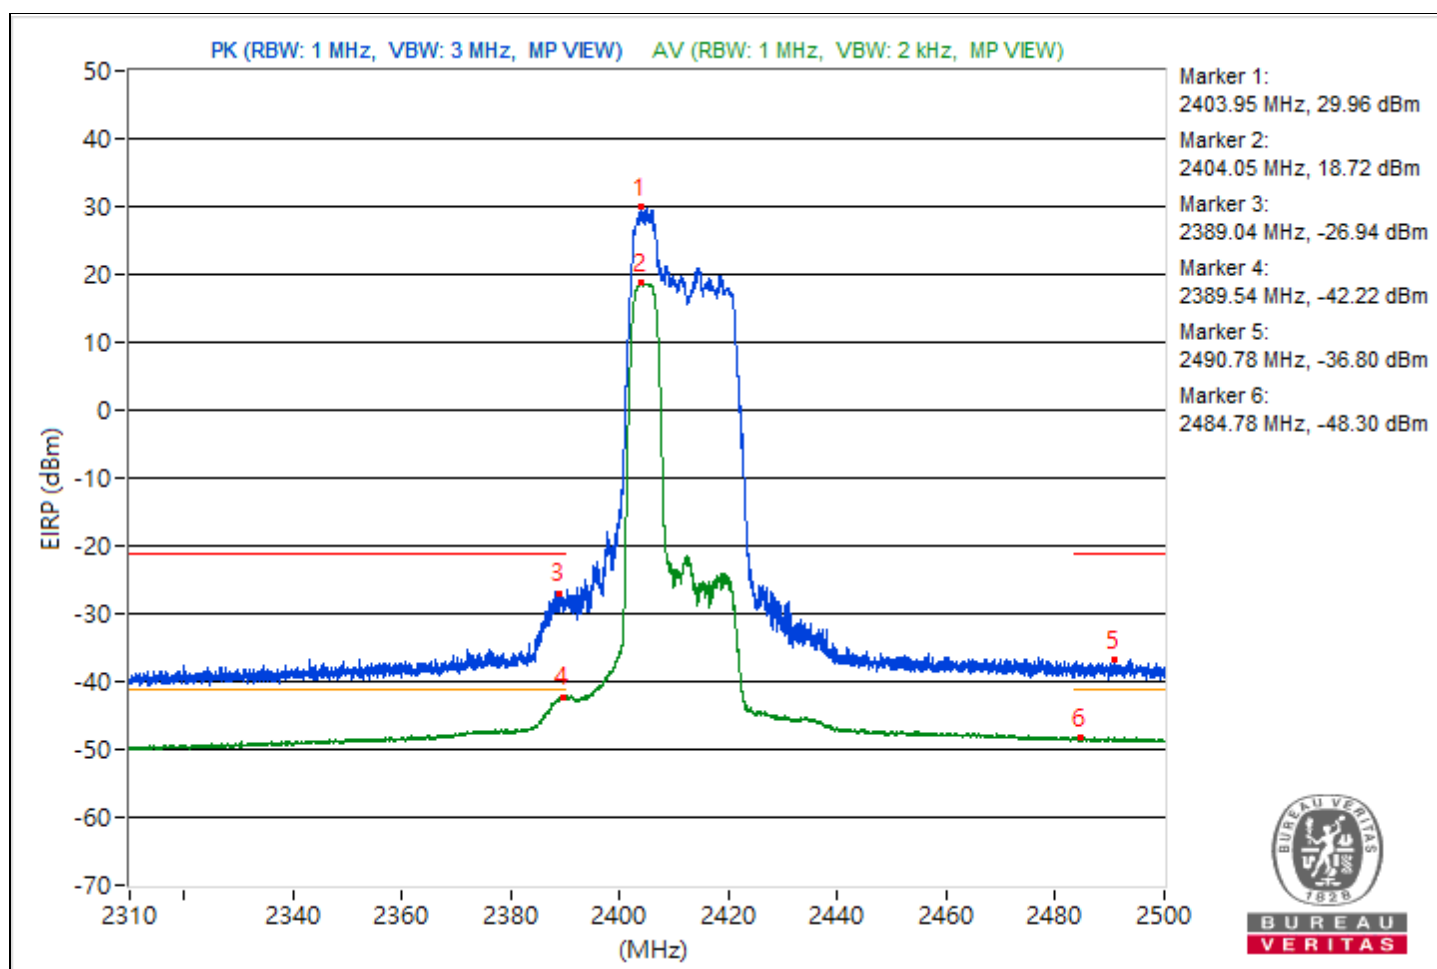


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2429.75	128.62 PK			25.32	22.57	6.19	33.36
2	*2429.18	118.51 AV			14.39	13.69	6.19	23.25
3	2389.97	71.35 PK	74	-2.65	-32.25	-34.2	6.19	-23.91
4	2389.21	49.61 AV	54	-4.39	-55.31	-54.44	6.19	-45.65
5	2483.59	70.69 PK	74	-3.31	-31.93	-37.01	6.19	-24.57
6	2483.52	50.09 AV	54	-3.91	-54.26	-54.48	6.19	-45.17

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

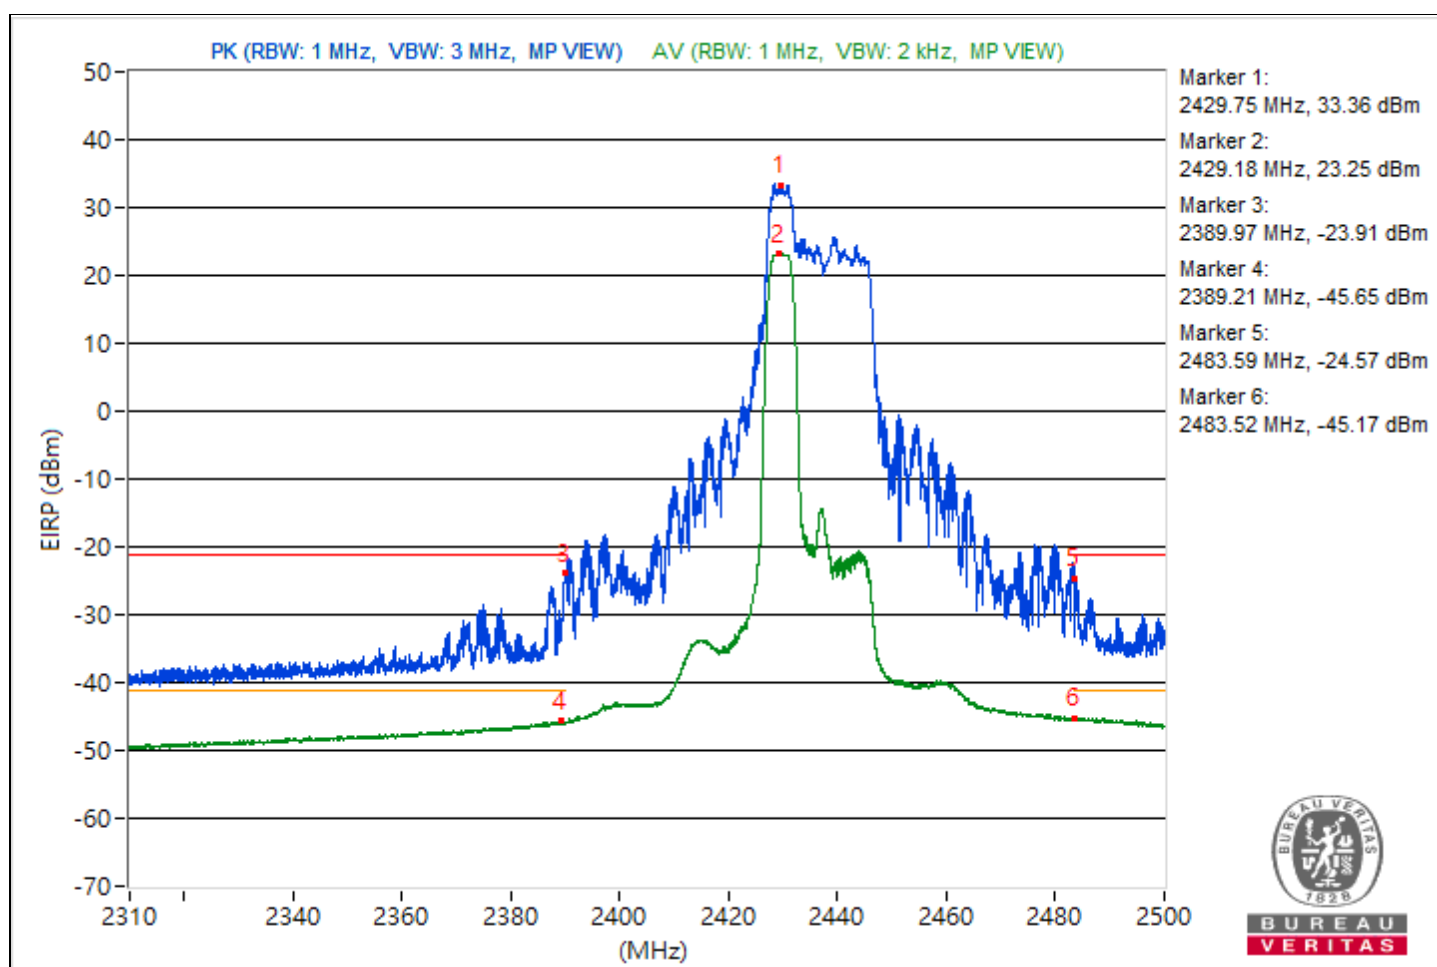


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2468.91	124.71 PK			21.24	18.96	6.19	29.45
2	*2469.46	113.9 AV			9.58	9.29	6.19	18.64
3	2380.87	59.34 PK	74	-14.66	-44.92	-45.32	6.19	-35.92
4	2380.49	46.73 AV	54	-7.27	-57.36	-58.13	6.19	-48.53
5	2487.13	68.82 PK	74	-5.18	-41.04	-33.31	6.19	-26.44
6	2483.54	53.07 AV	54	-0.93	-51.46	-51.32	6.19	-42.19

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

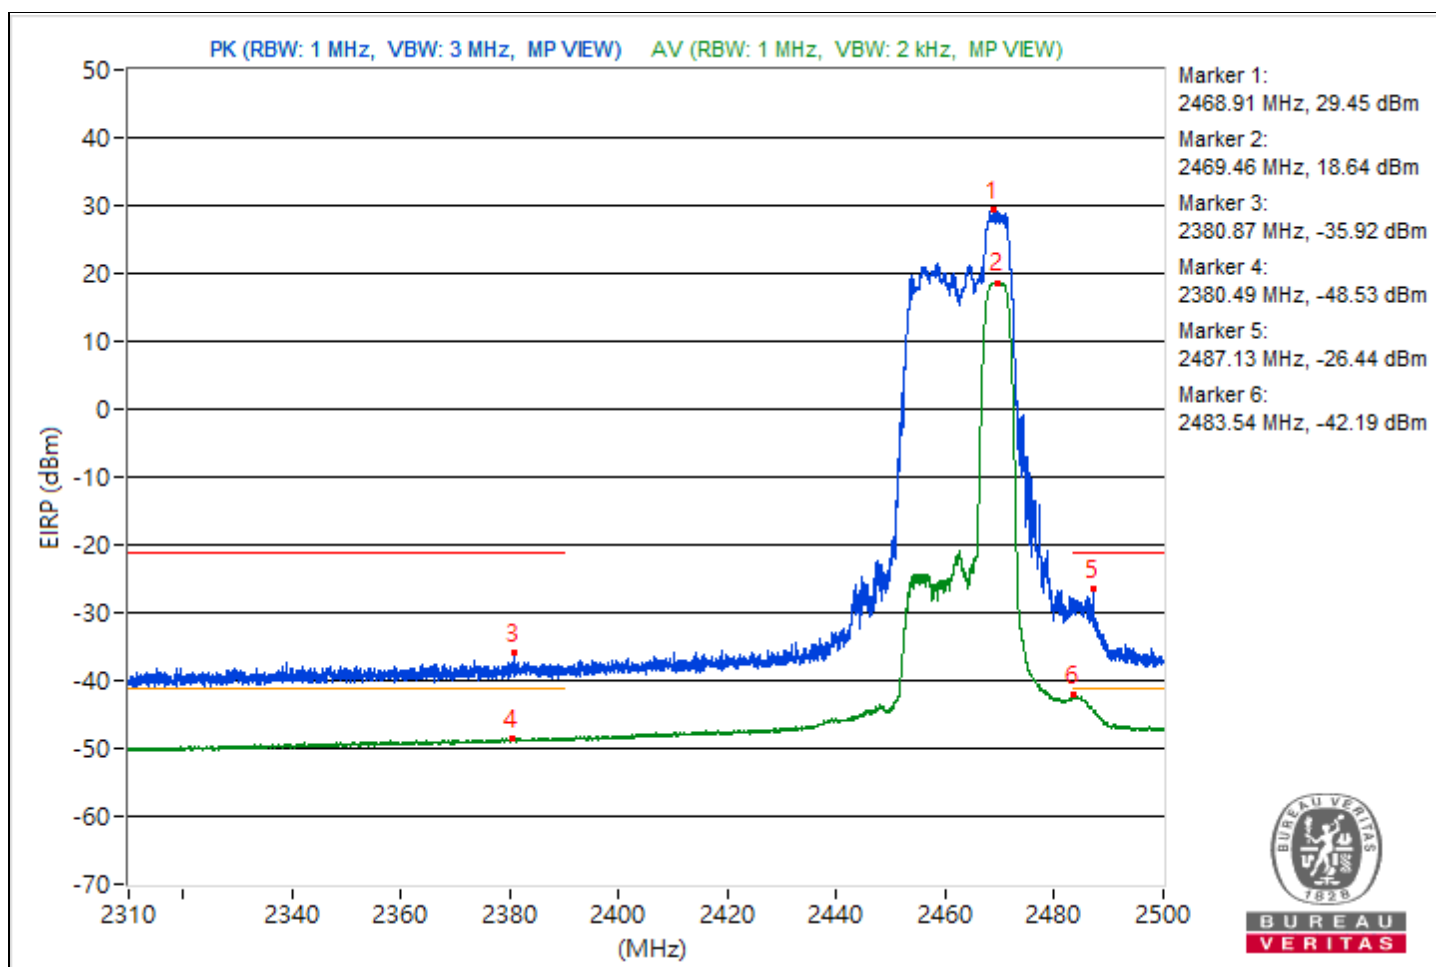


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2474.82	125.42 PK			21.36	20.53	6.19	30.16
2	*2474.92	112.47 AV			8.28	7.73	6.19	17.21
3	2374.15	58.74 PK	74	-15.26	-44.51	-47.4	6.19	-36.52
4	2388.16	47.05 AV	54	-6.95	-56.93	-57.94	6.19	-48.21
5	2483.52	73.33 PK	74	-0.67	-32.62	-30.02	6.19	-21.93
6	2483.57	52.37 AV	54	-1.63	-51.52	-52.75	6.19	-42.89

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

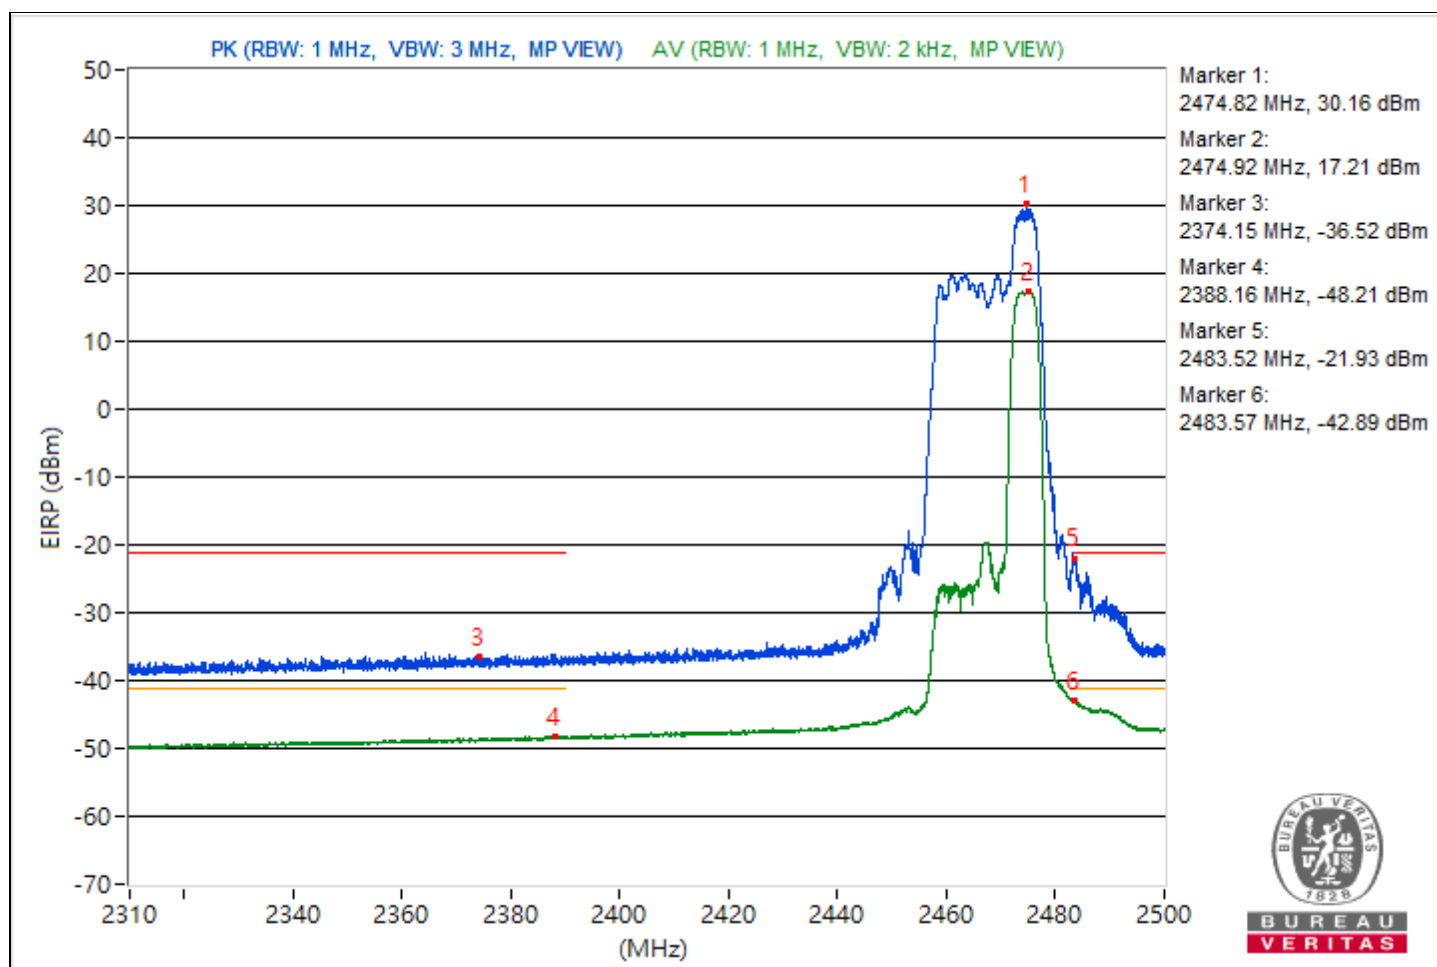

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		


Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	65.64 PK	74	-8.36	-38.77	-38.88	6.19	-29.62
2	2483.5	53.05 AV	54	-0.95	-52.18	-50.76	6.19	-42.21

Notes:


1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

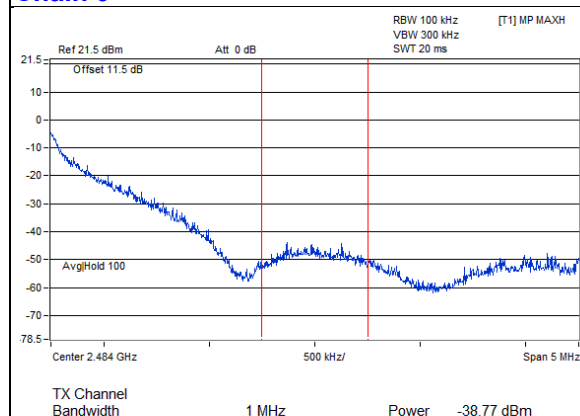


Peak

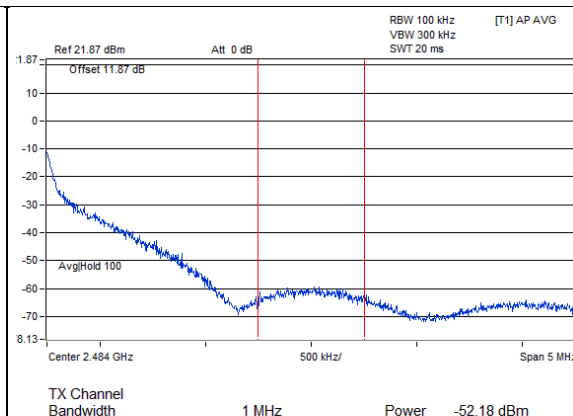


Average

Chain 1

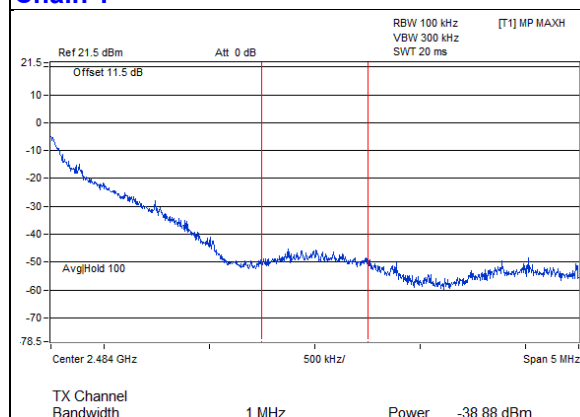

Peak

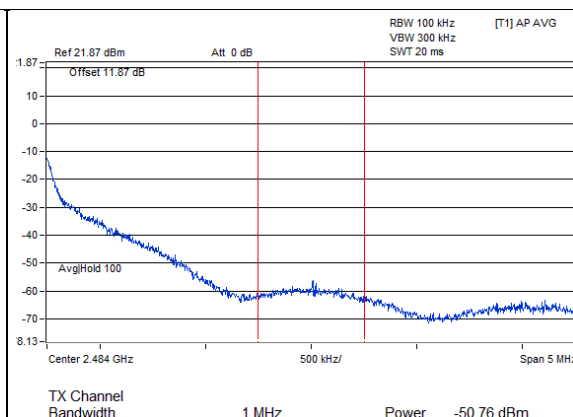


Average

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2404.19	123.27 PK			17.76	19.66	6.19	28.01
2	*2404.53	111.12 AV			6.81	6.49	6.19	15.86
3	2389.47	65.4 PK	74	-8.6	-42.02	-37.32	6.19	-29.86
4	2389.92	52.33 AV	54	-1.67	-52.2	-52.07	6.19	-42.93
5	2496.7	58.98 PK	74	-15.02	-44.7	-46.42	6.19	-36.28
6	2483.64	46.96 AV	54	-7.04	-57.5	-57.51	6.19	-48.3

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

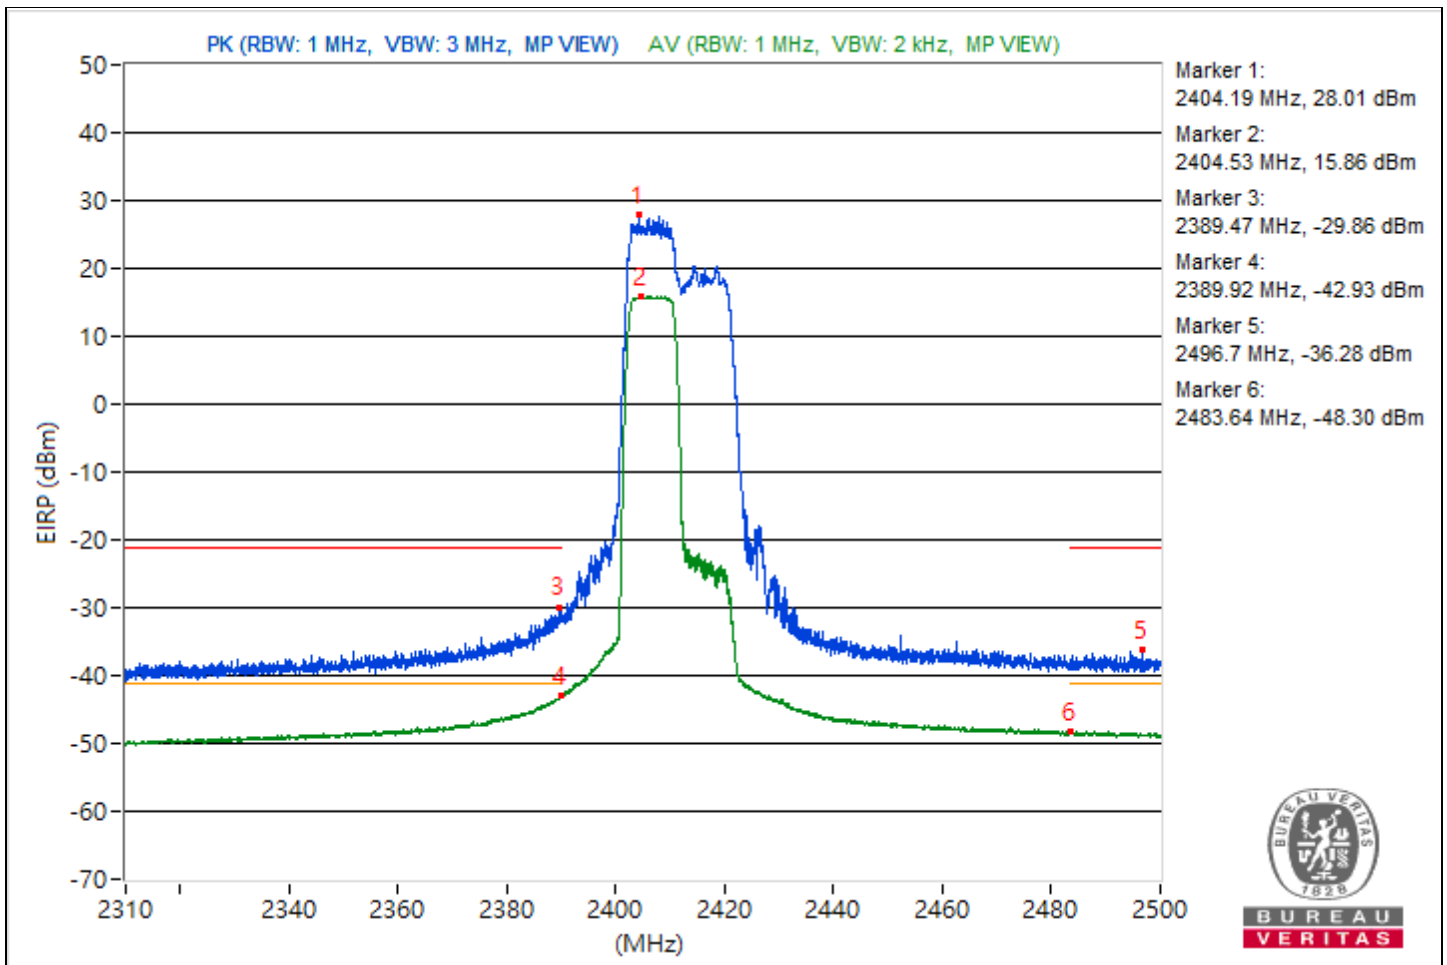


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2431.79	126.7 PK			23.55	20.34	6.19	31.44
2	*2429.06	115.52 AV			11.2	10.92	6.19	20.26
3	2387.54	68.89 PK	74	-5.11	-33.79	-38.63	6.19	-26.37
4	2389.94	50.09 AV	54	-3.91	-54.61	-54.15	6.19	-45.17
5	2483.52	70.78 PK	74	-3.22	-32.89	-34.66	6.19	-24.48
6	2484.87	50.84 AV	54	-3.16	-53.98	-53.29	6.19	-44.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

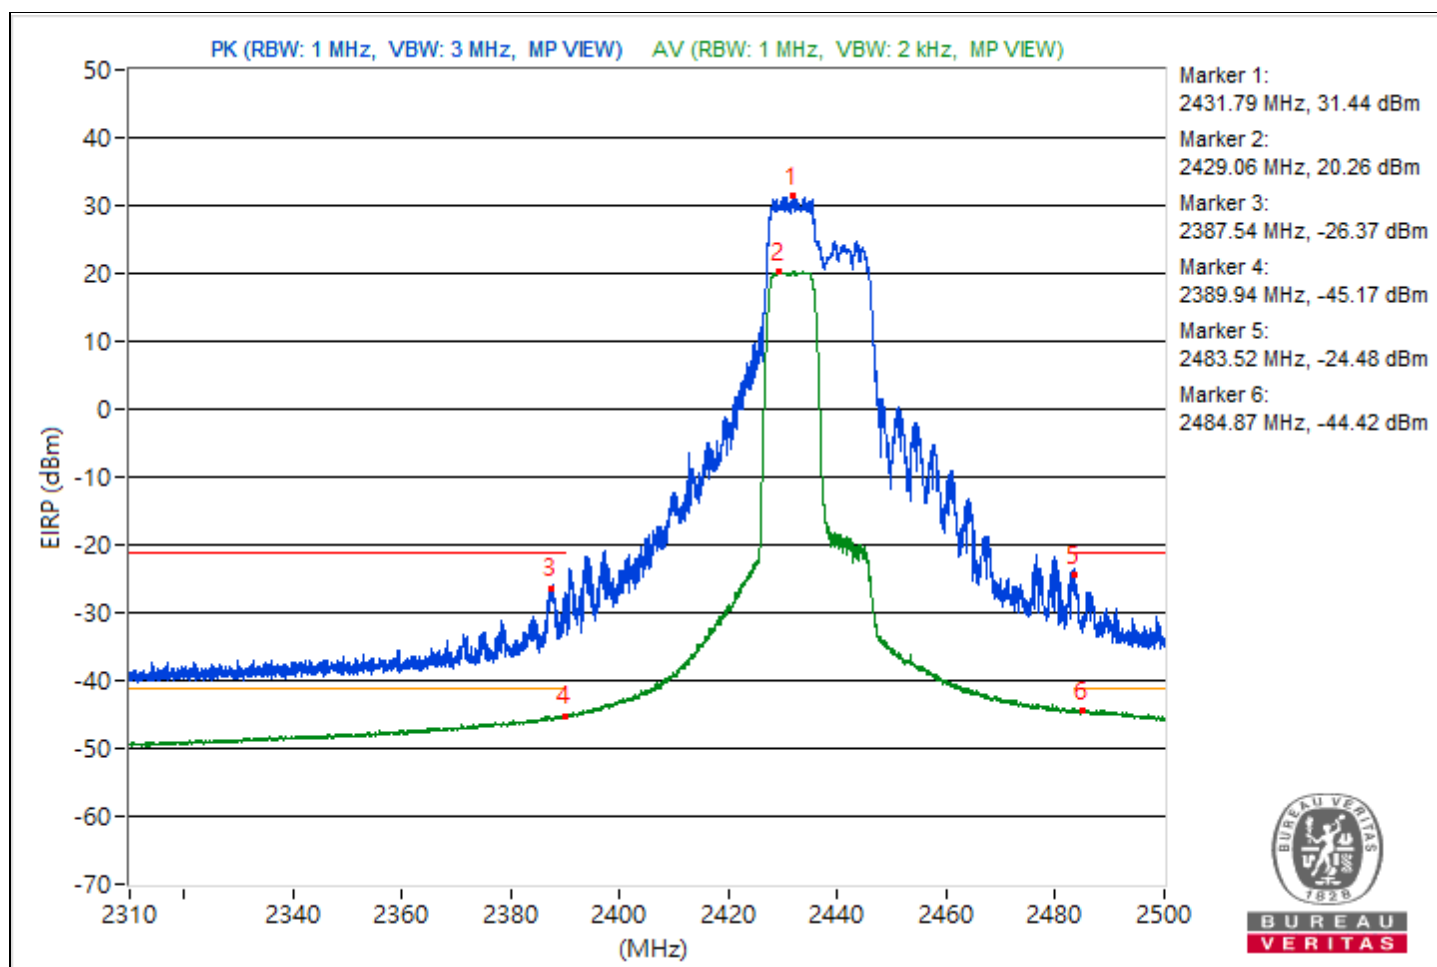


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2467.82	123.29 PK			19.48	18.08	6.19	28.03
2	*2469.89	112.34 AV			8.32	7.39	6.19	17.08
3	2386.57	58.37 PK	74	-15.63	-47.07	-45.28	6.19	-36.89
4	2389.51	47.23 AV	54	-6.77	-56.98	-57.5	6.19	-48.03
5	2485.51	66.53 PK	74	-7.47	-39.79	-36.63	6.19	-28.73
6	2483.52	53.39 AV	54	-0.61	-50.74	-51.43	6.19	-41.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

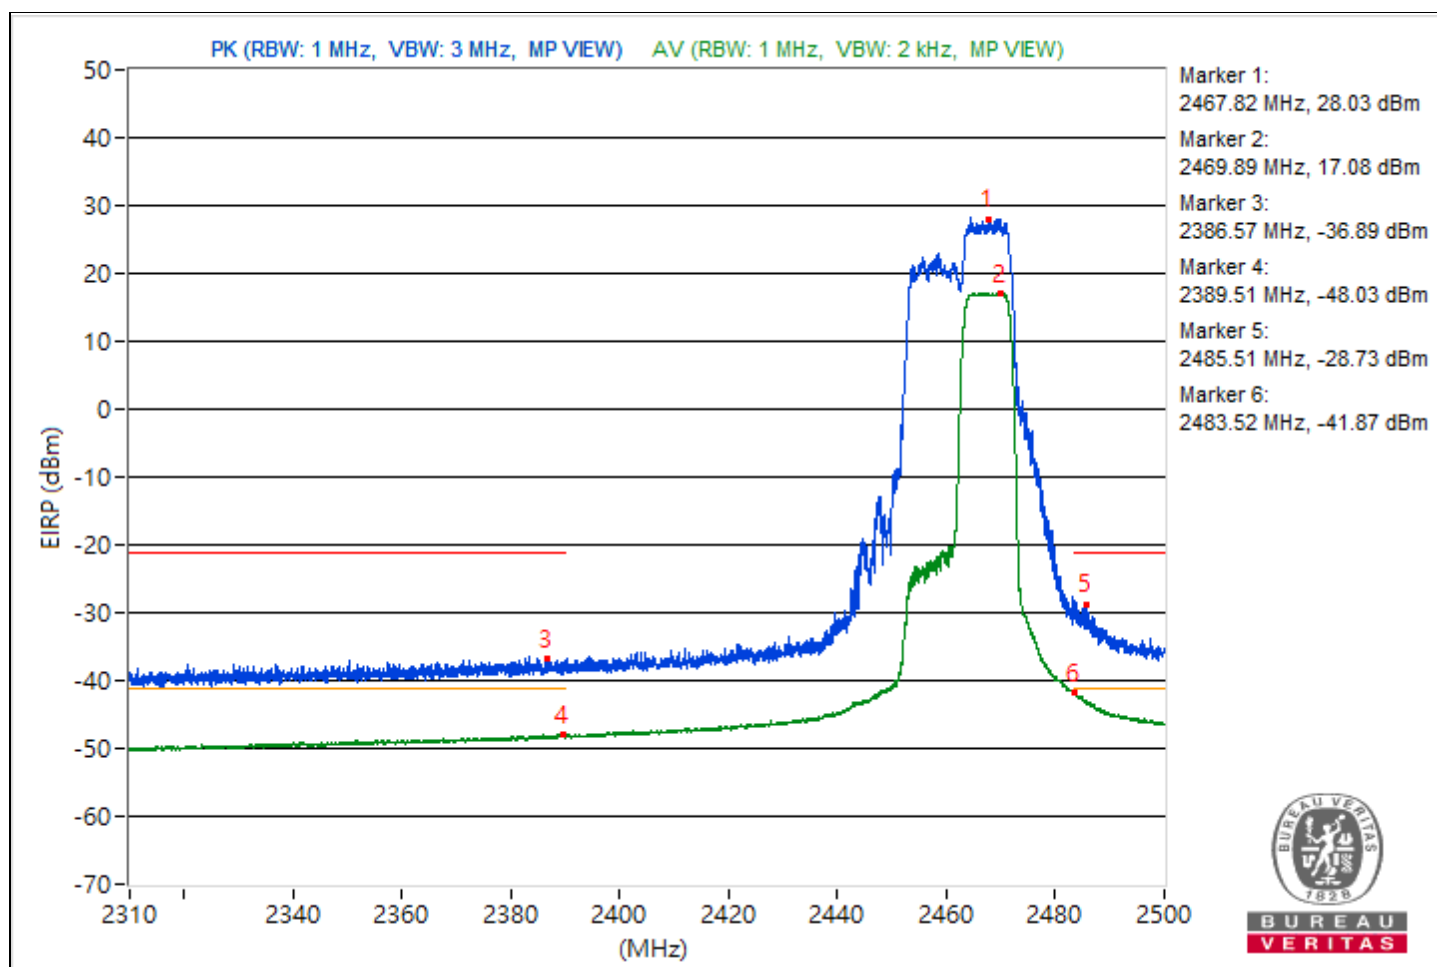


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2472.45	120.91 PK			17.78	14.54	6.19	25.65
2	*2472.43	109.86 AV			5.5	5.3	6.19	14.6
3	2386.64	57.81 PK	74	-16.19	-47.89	-45.69	6.19	-37.45
4	2387.38	46.6 AV	54	-7.4	-57.82	-57.91	6.19	-48.66
5	2483.52	71.1 PK	74	-2.9	-33.81	-32.95	6.19	-24.16
6	2483.64	52.88 AV	54	-1.12	-51.14	-52.07	6.19	-42.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

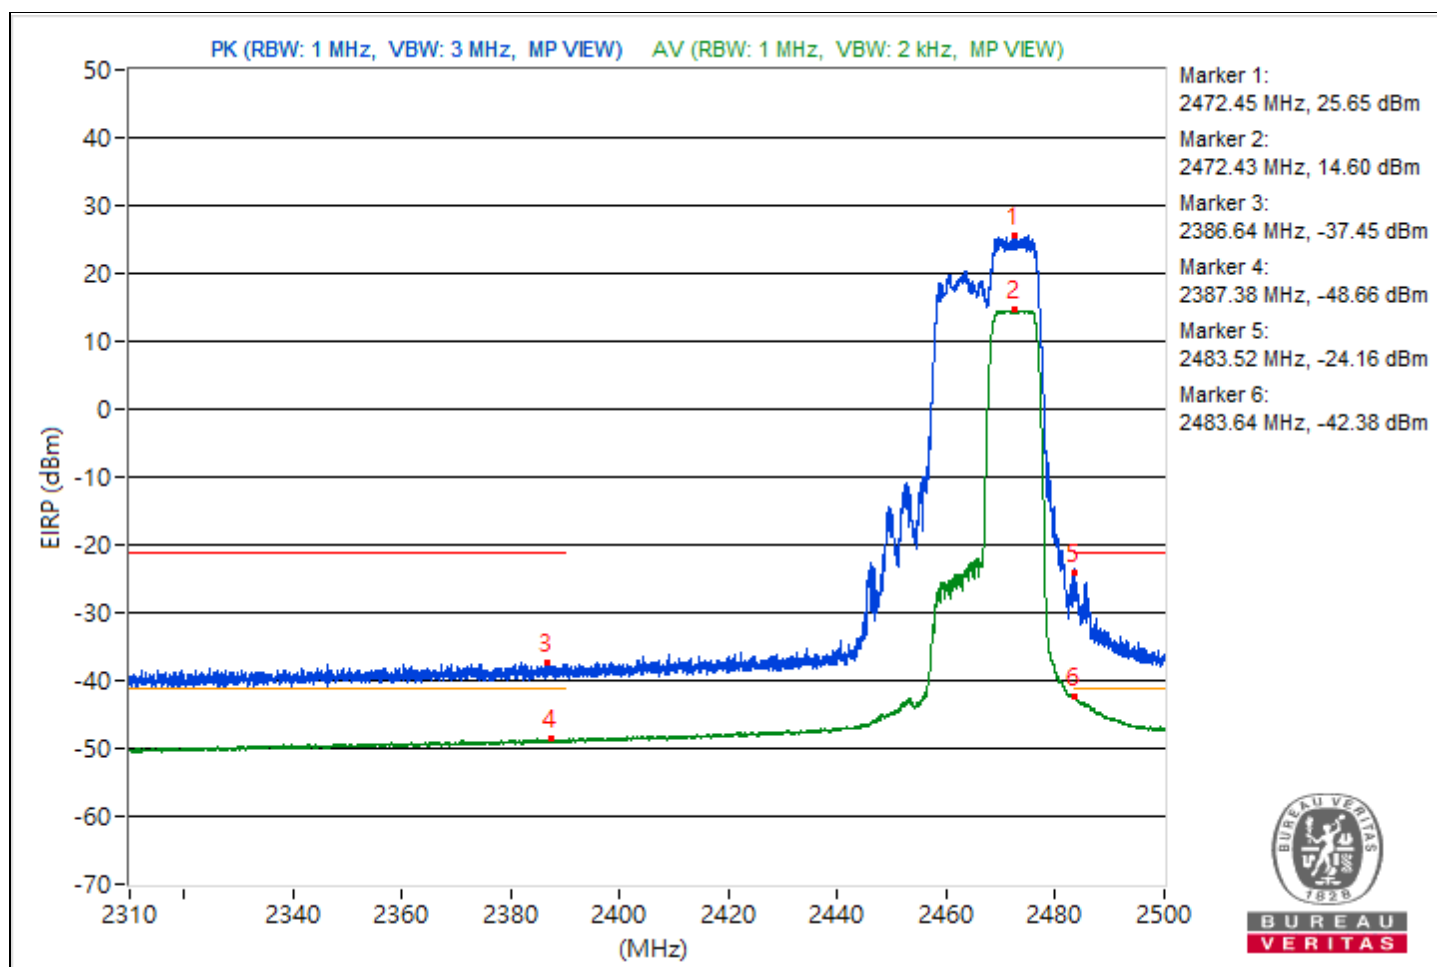

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		


Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	64.9 PK	74	-9.1	-40.13	-39.06	6.19	-30.36
2	2483.5	53.03 AV	54	-0.97	-53.22	-50.17	6.19	-42.23

Notes:


1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

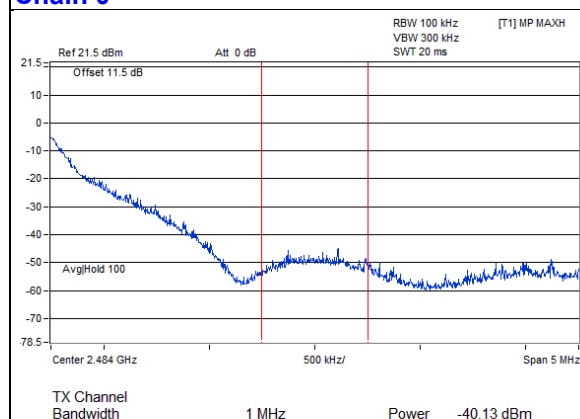


Peak

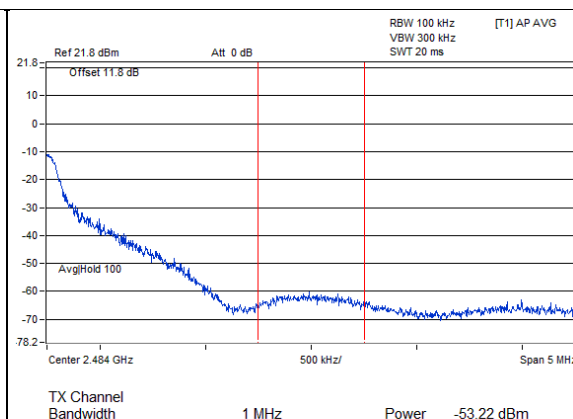


Average

Chain 1

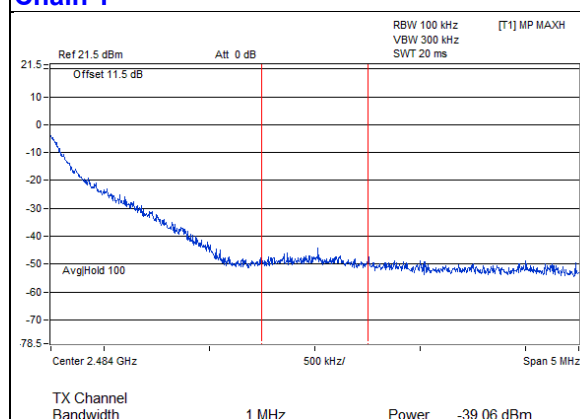

Peak

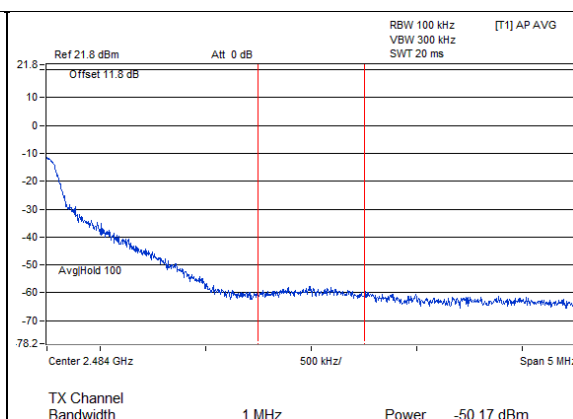


Average

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2408.35	123.96 PK			20.87	17.5	6.19	28.7
2	*2408.47	112.4 AV			8.04	7.84	6.19	17.14
3	2386.45	63.03 PK	74	-10.97	-39.45	-45.18	6.19	-32.23
4	2389.7	50.42 AV	54	-3.58	-53.48	-54.67	6.19	-44.84
5	2493.26	58.13 PK	74	-15.87	-44.94	-48.39	6.19	-37.13
6	2485.28	46.98 AV	54	-7.02	-57.72	-57.26	6.19	-48.28

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

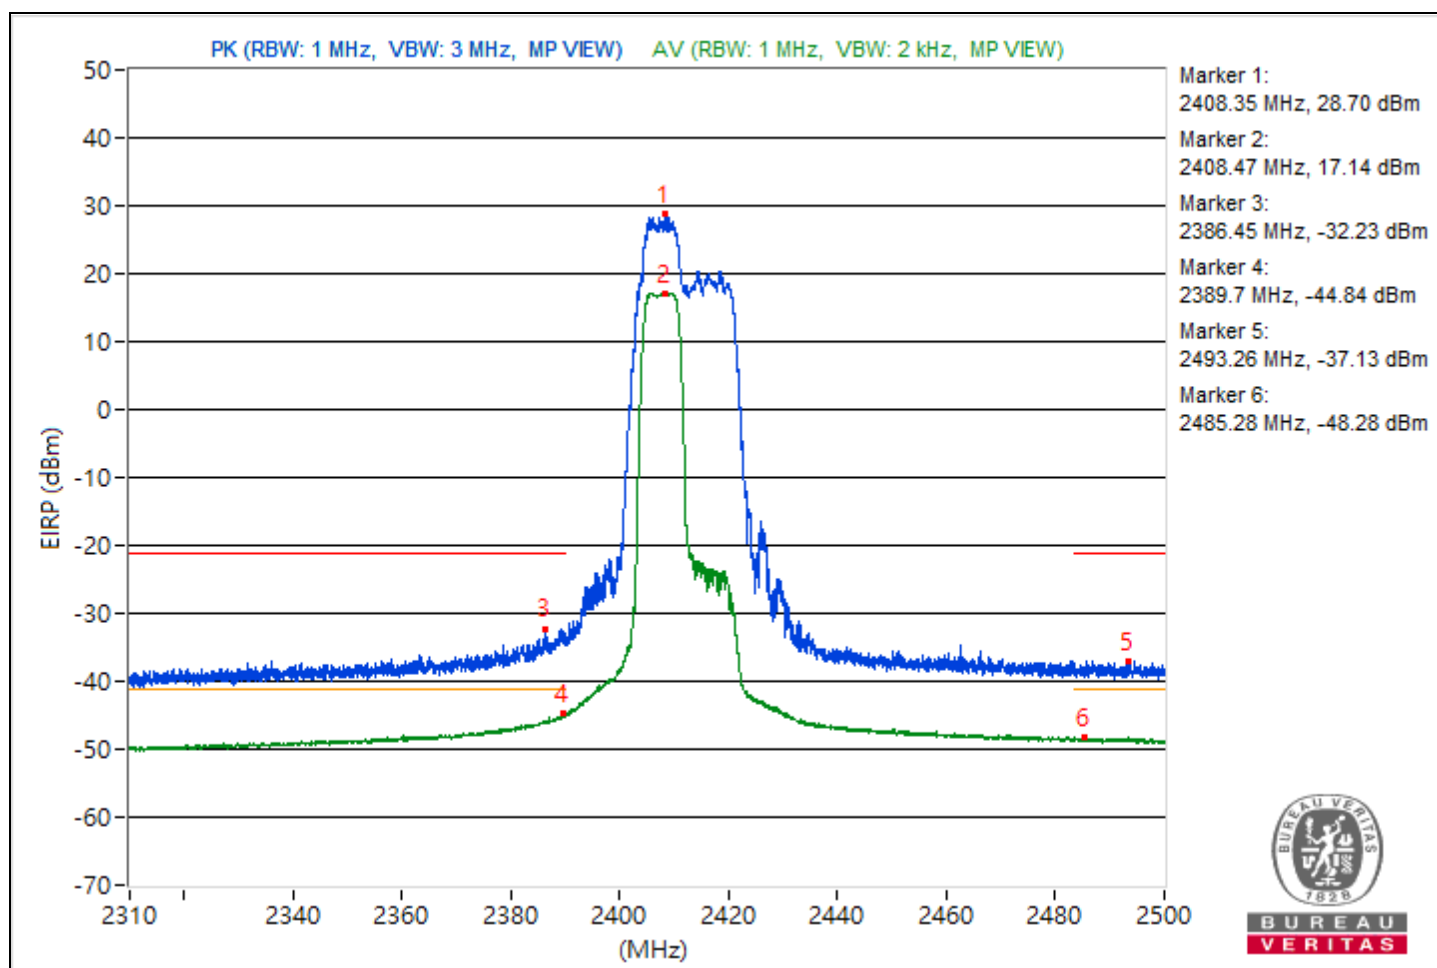


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2434.69	127.58 PK			21.84	24.11	6.19	32.32
2	*2434.52	116.61 AV			12.44	11.84	6.19	21.35
3	2389.59	69.45 PK	74	-4.55	-32.32	-43.39	6.19	-25.81
4	2389.4	49.91 AV	54	-4.09	-54.63	-54.48	6.19	-45.35
5	2487.51	70.2 PK	74	-3.8	-33.97	-34.57	6.19	-25.06
6	2484.61	51.27 AV	54	-2.73	-53.47	-52.93	6.19	-43.99

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

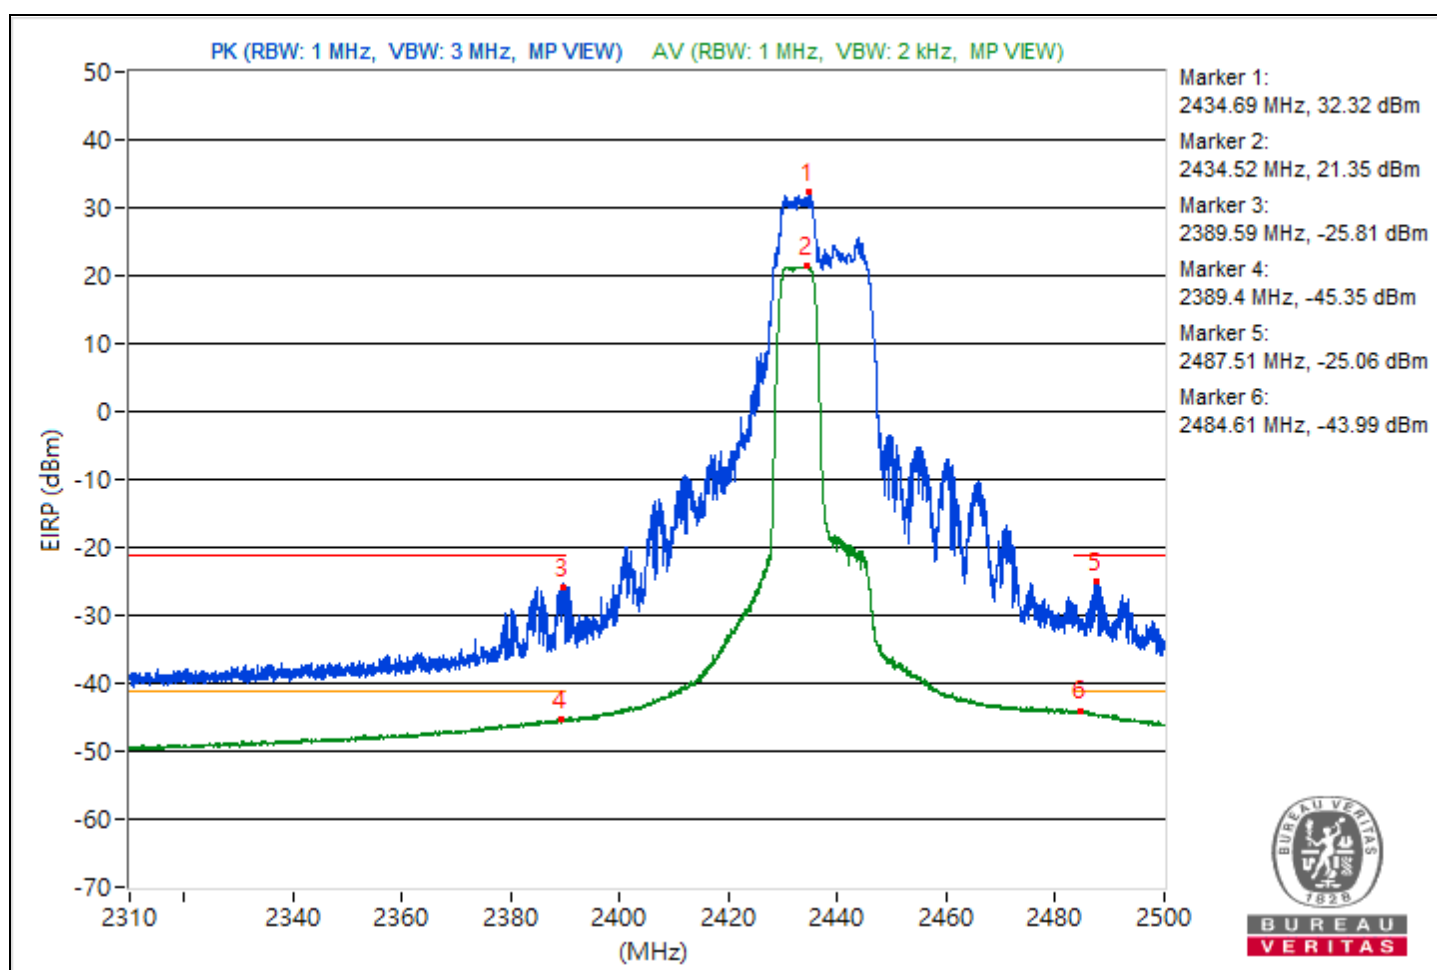


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2467.06	125.33 PK			21.48	20.15	6.19	30.07
2	*2465.32	113.88 AV			9.77	9.02	6.19	18.62
3	2384.91	58.41 PK	74	-15.59	-45.01	-47.42	6.19	-36.85
4	2389.09	47.15 AV	54	-6.85	-57.32	-57.31	6.19	-48.11
5	2484.82	65.69 PK	74	-8.31	-36.49	-43.91	6.19	-29.57
6	2483.78	51 AV	54	-3	-53.29	-53.64	6.19	-44.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

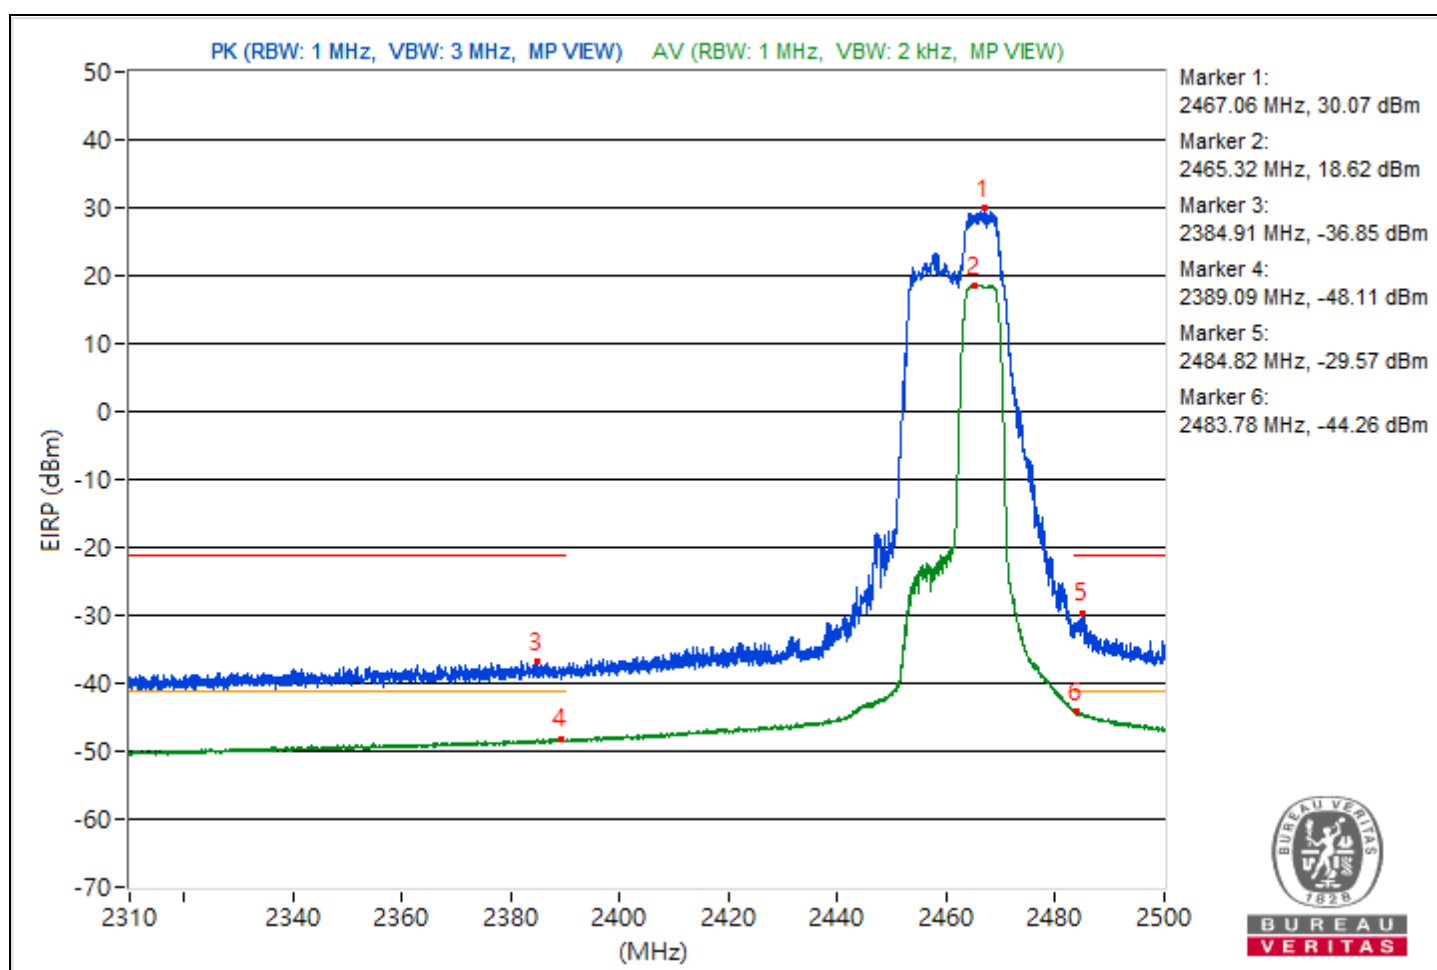


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2471.52	121.92 PK			18.52	16.05	6.19	26.66
2	*2469.72	111.02 AV			6.8	6.3	6.19	15.76
3	2382.56	57.87 PK	74	-16.13	-48.15	-45.45	6.19	-37.39
4	2388.9	46.38 AV	54	-7.62	-58.29	-57.88	6.19	-48.88
5	2483.52	68.85 PK	74	-5.15	-33.58	-39.56	6.19	-26.41
6	2483.61	52.42 AV	54	-1.58	-51.95	-52.14	6.19	-42.84

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

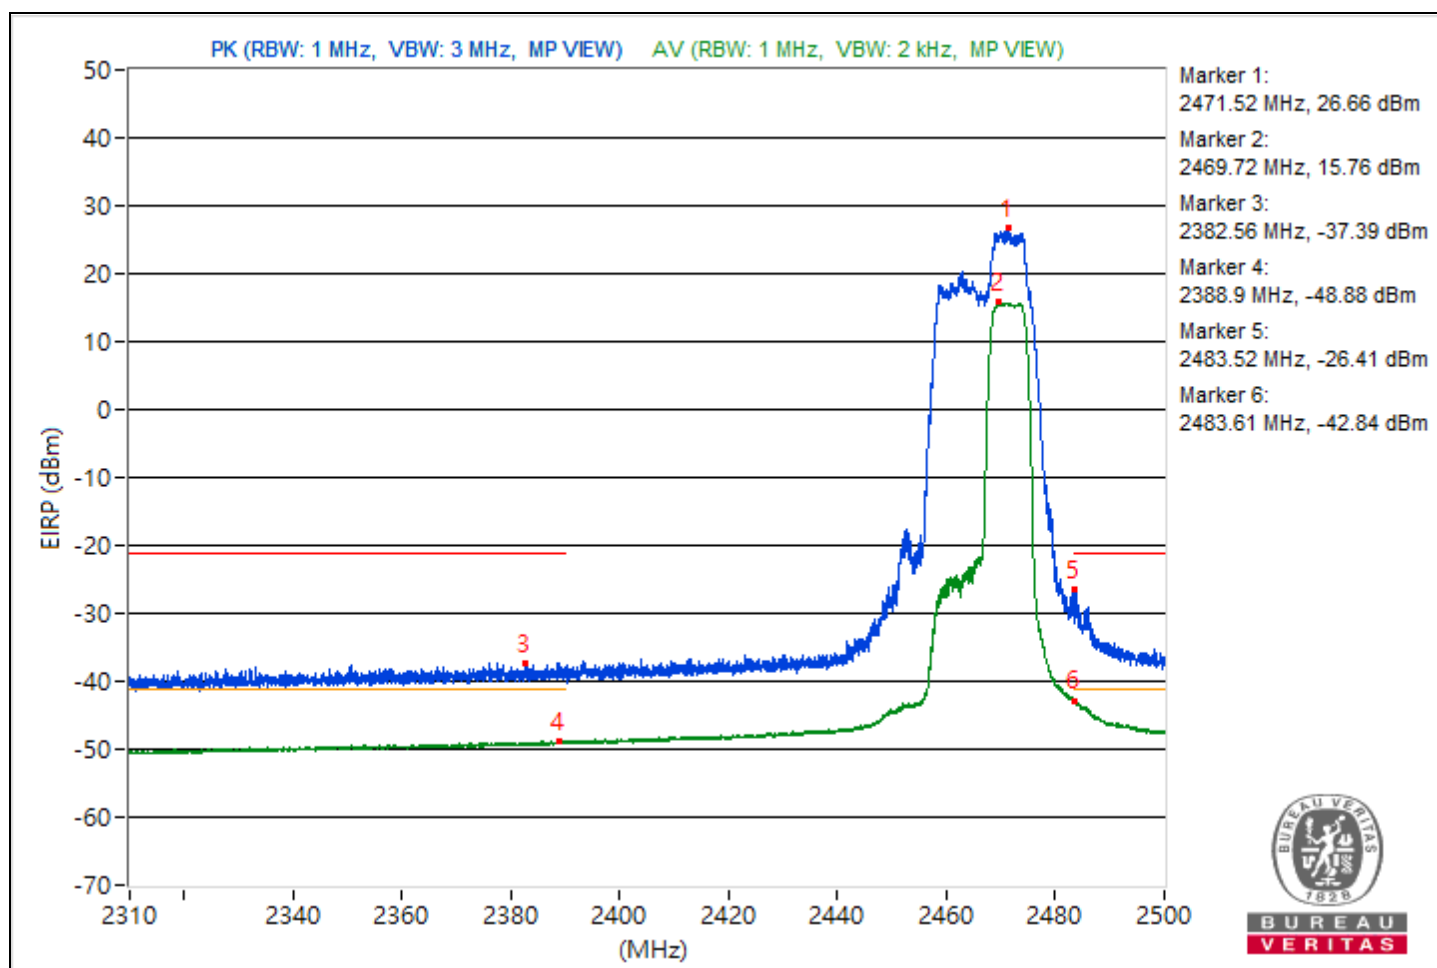

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		



Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	64.77 PK	74	-9.23	-39.68	-39.7	6.19	-30.49
2	2483.5	53.5AV	54	-0.5	-50.78	-51.15	6.19	-41.76

Notes:



1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

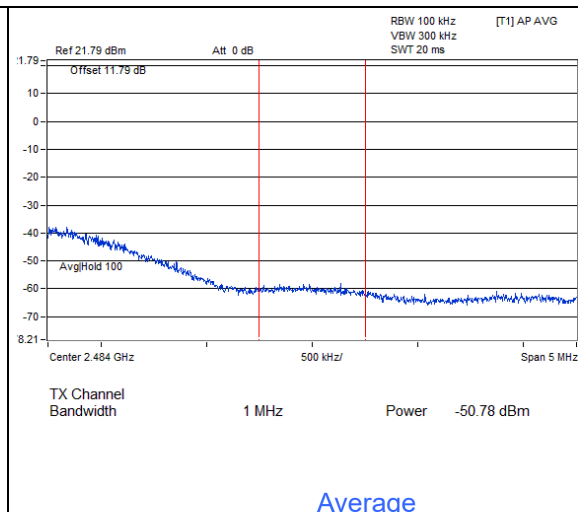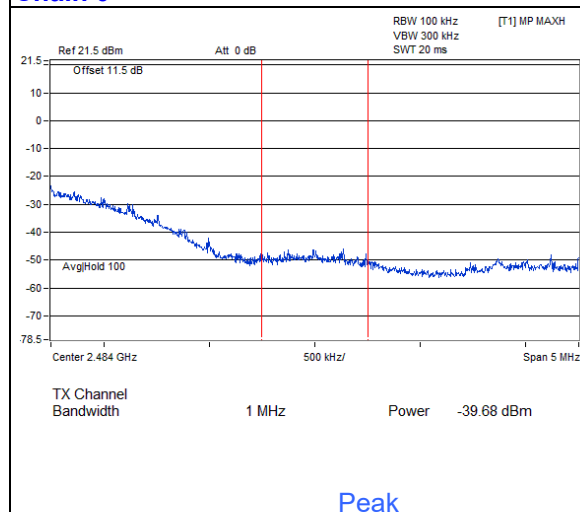

Chain 1

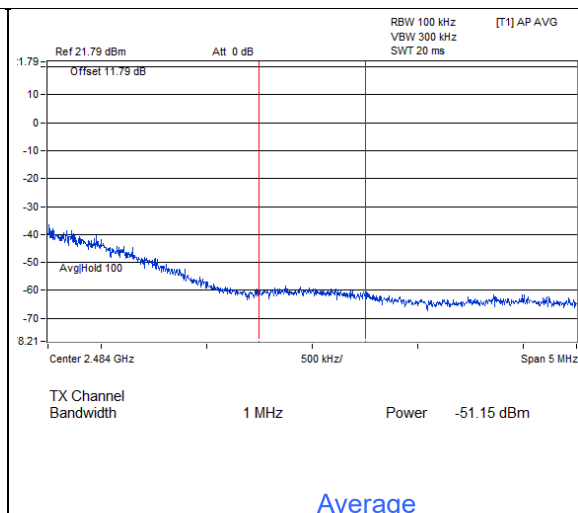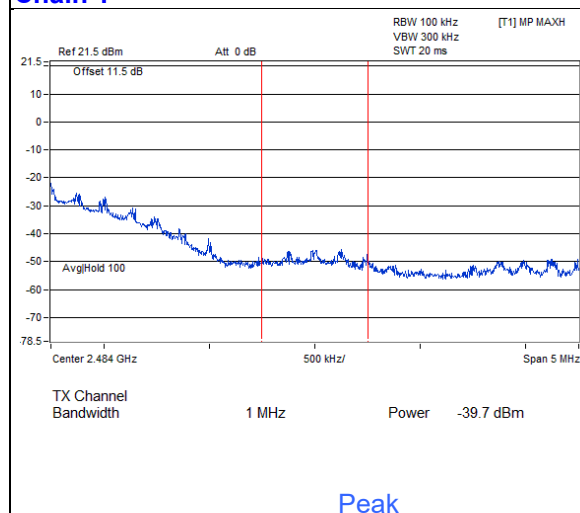


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 64% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2410.46	122.09 PK			16.29	18.65	6.19	26.83
2	*2410.77	110.99 AV			6.87	6.17	6.19	15.73
3	2389.78	64.03 PK	74	-9.97	-41.21	-39.76	6.19	-31.23
4	2389.97	51.44 AV	54	-2.56	-52.65	-53.44	6.19	-43.82
5	2496.41	58.04 PK	74	-15.96	-46.83	-46.04	6.19	-37.22
6	2483.71	46.86 AV	54	-7.14	-57.2	-58.03	6.19	-48.4

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

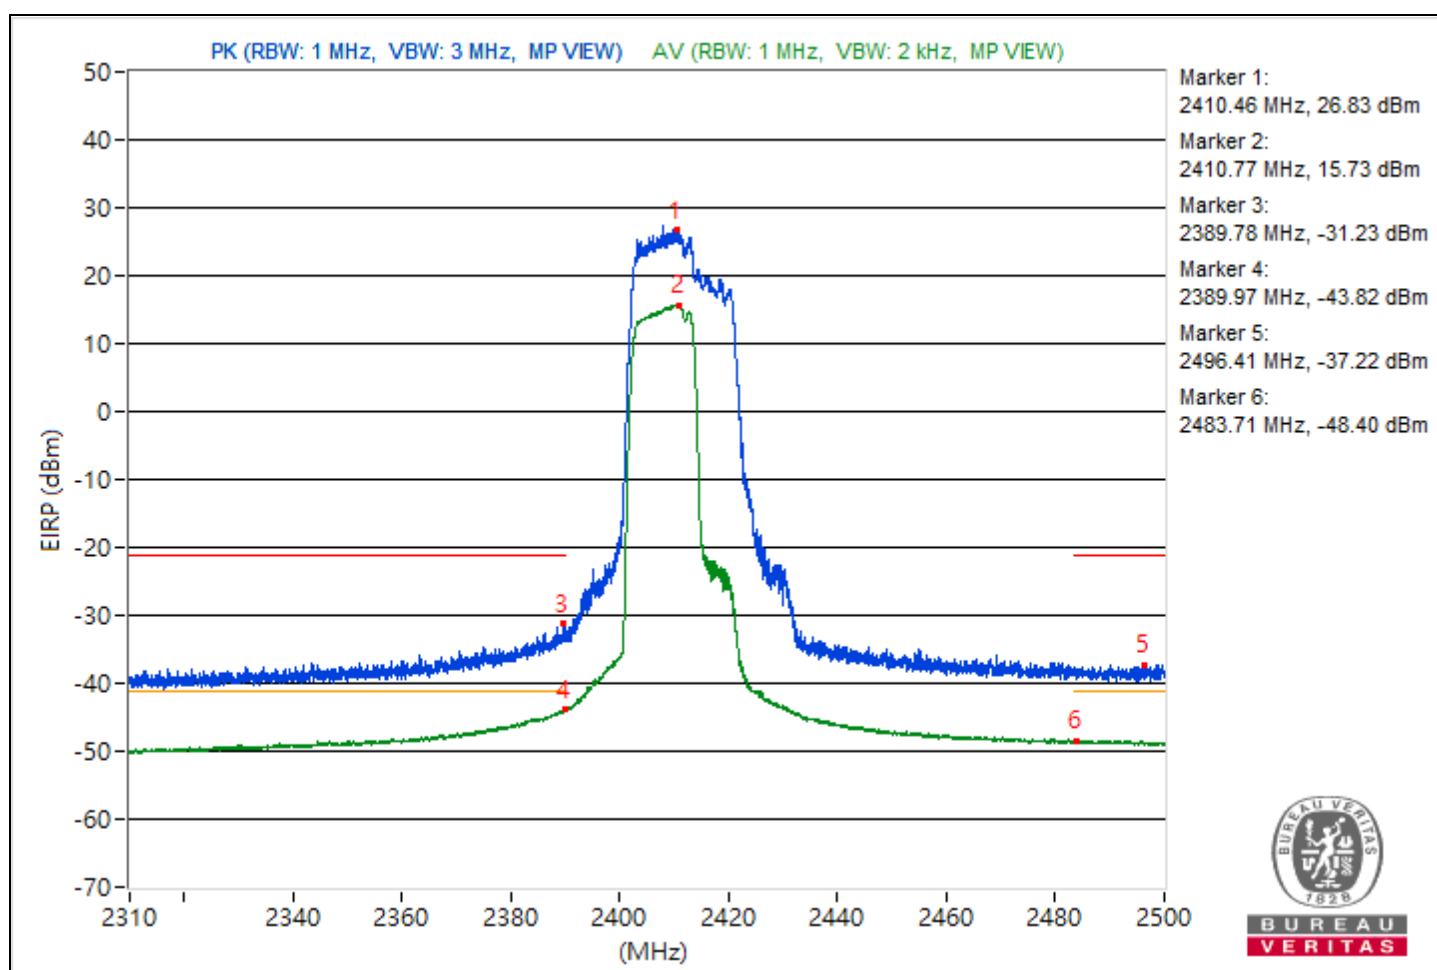


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2431.29	125.71 PK			19.28	22.59	6.19	30.45
2	*2435.64	115.29 AV			10.87	10.78	6.19	20.03
3	2389.11	66.54 PK	74	-7.46	-36.45	-40.15	6.19	-28.72
4	2389.63	50.3 AV	54	-3.7	-54.35	-53.97	6.19	-44.96
5	2485.89	66.03 PK	74	-7.97	-36.86	-40.93	6.19	-29.23
6	2485.16	51.1 AV	54	-2.9	-53.72	-53.02	6.19	-44.16

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

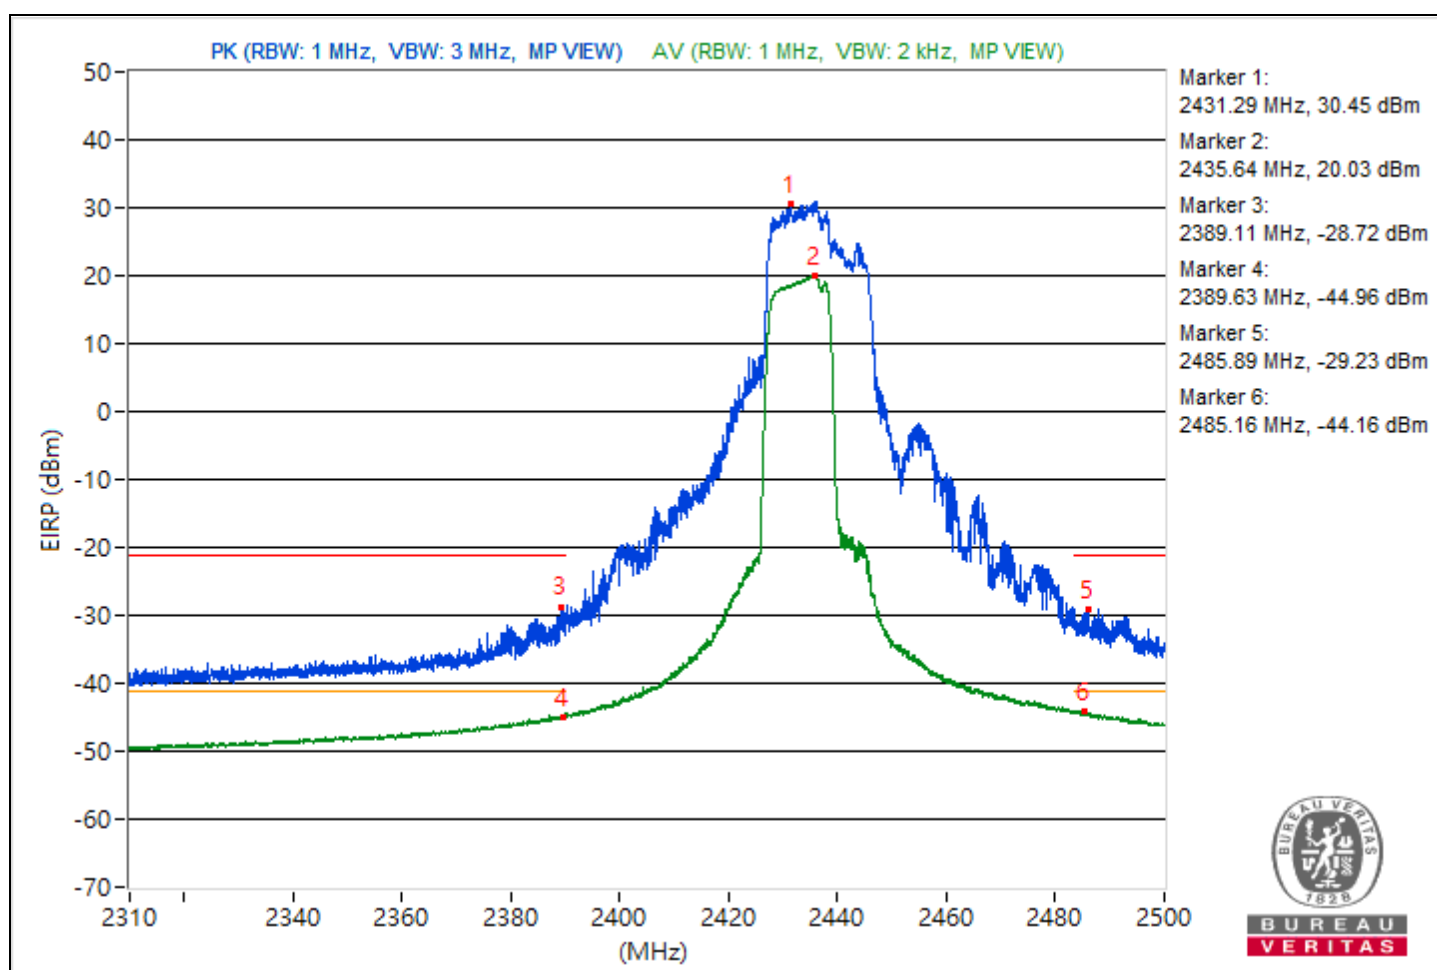


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2463.73	123.77 PK			20.34	17.96	6.19	28.51
2	*2463.19	112.59 AV			8.47	7.77	6.19	17.33
3	2383.27	59.1 PK	74	-14.9	-45.56	-45.17	6.19	-36.16
4	2386.57	47.23 AV	54	-6.77	-57.19	-57.27	6.19	-48.03
5	2485.01	64.2 PK	74	-9.8	-39.14	-41.76	6.19	-31.06
6	2483.57	52.67 AV	54	-1.33	-51.76	-51.82	6.19	-42.59

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

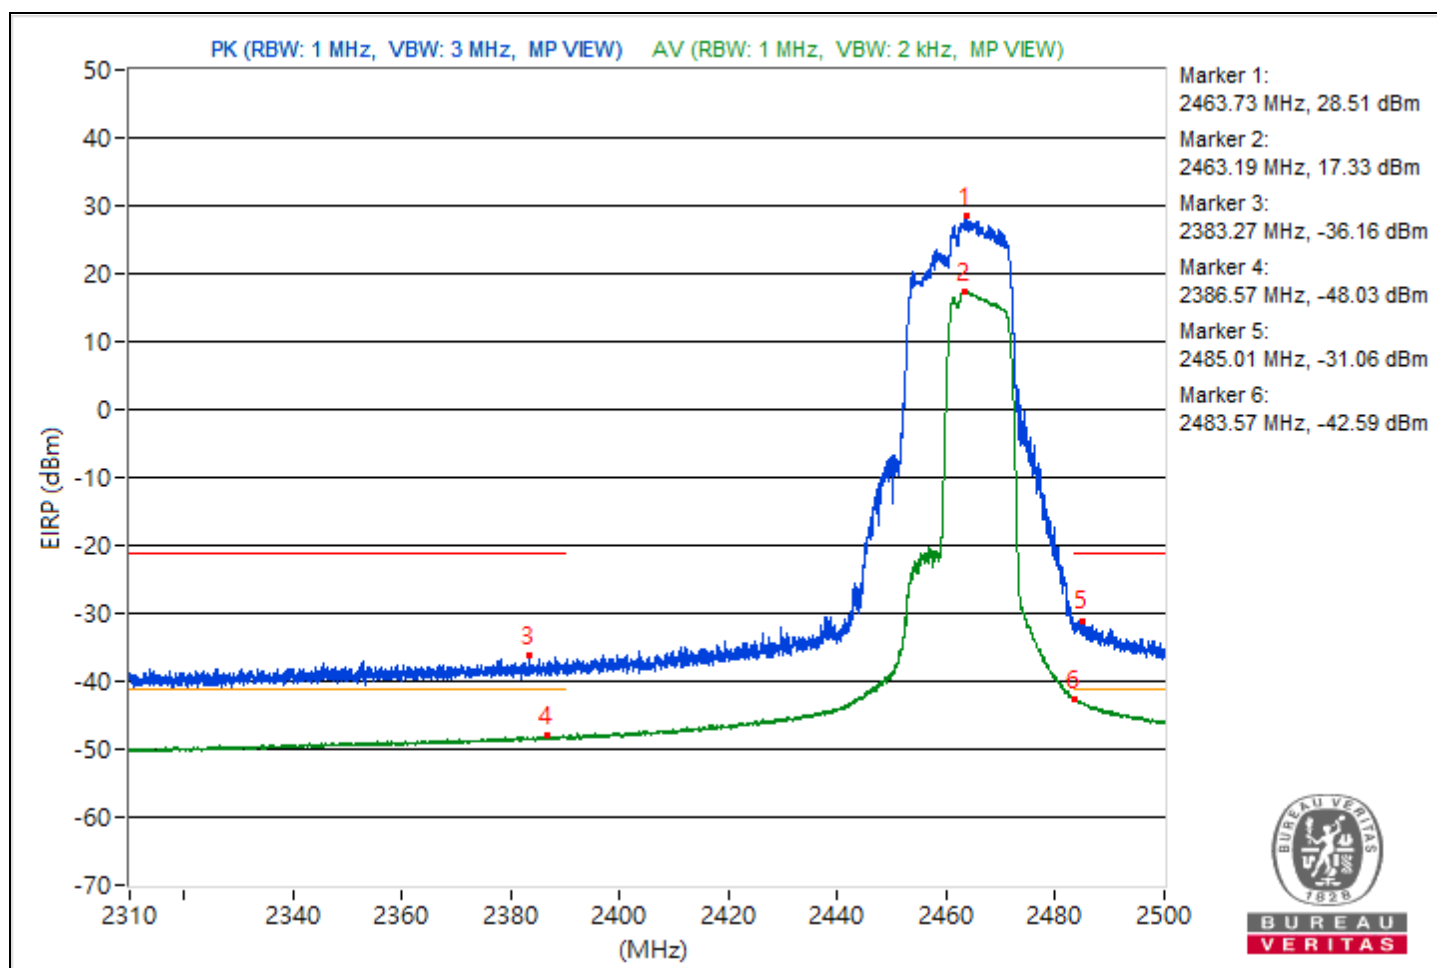


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2468.2	120.82 PK			15.47	17.09	6.19	25.56
2	*2468.74	109.66 AV			5.22	5.17	6.19	14.4
3	2378.33	57.94 PK	74	-16.06	-47.8	-45.53	6.19	-37.32
4	2386.28	46.5 AV	54	-7.5	-57.76	-58.18	6.19	-48.76
5	2483.85	69.78 PK	74	-4.22	-32.45	-39.52	6.19	-25.48
6	2483.68	52.41 AV	54	-1.59	-52.38	-51.75	6.19	-42.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

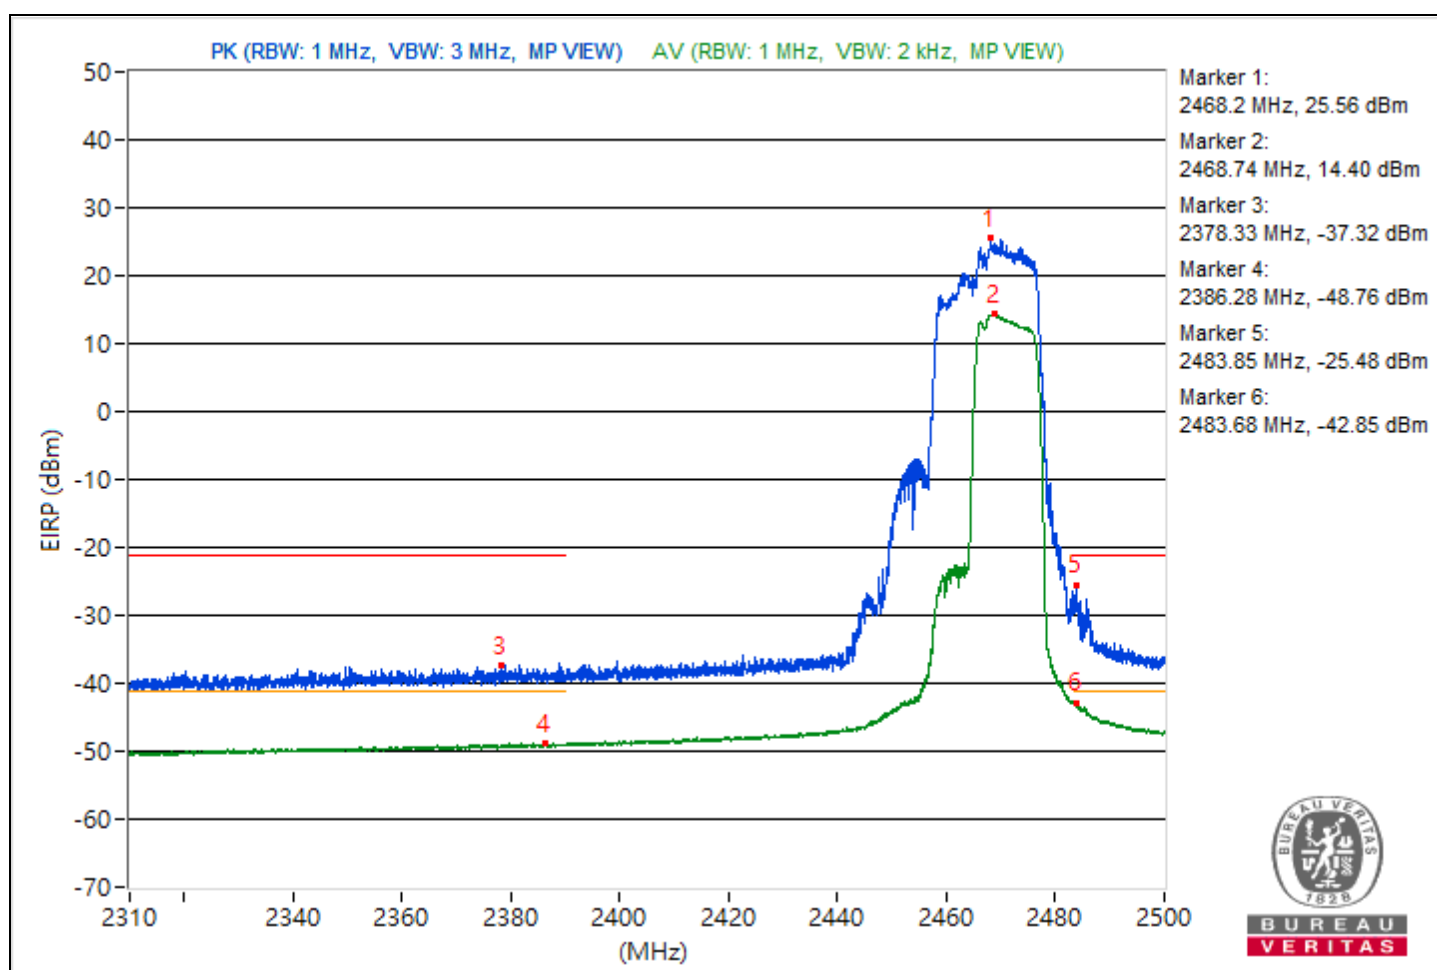

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	21°C, 60% RH
Tested By	Katina Lu		



Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2483.5	64.8 PK	74	-9.2	-40.63	-38.86	6.19	-30.46
2	2483.5	53.17 AV	54	-0.83	-53.48	-49.84	6.19	-42.09

Notes:



1. Margin value = Emission Level - Limit value.
2. Follow ANSI C63.10 section 11.13.3 Integration method.

For Integration method:

Chain 0

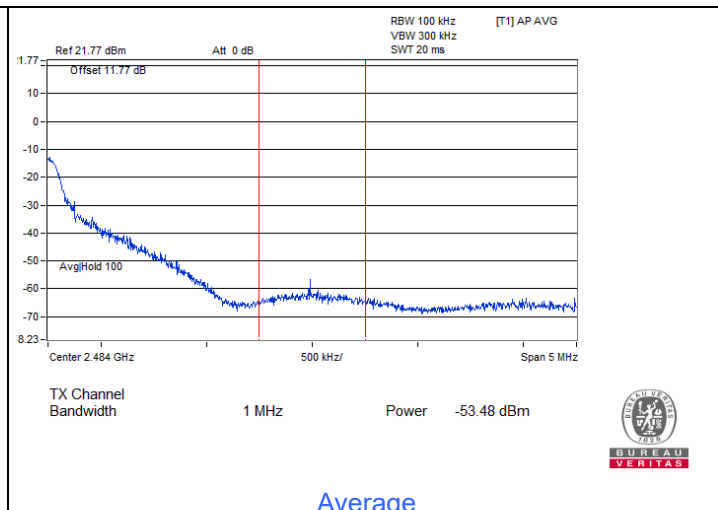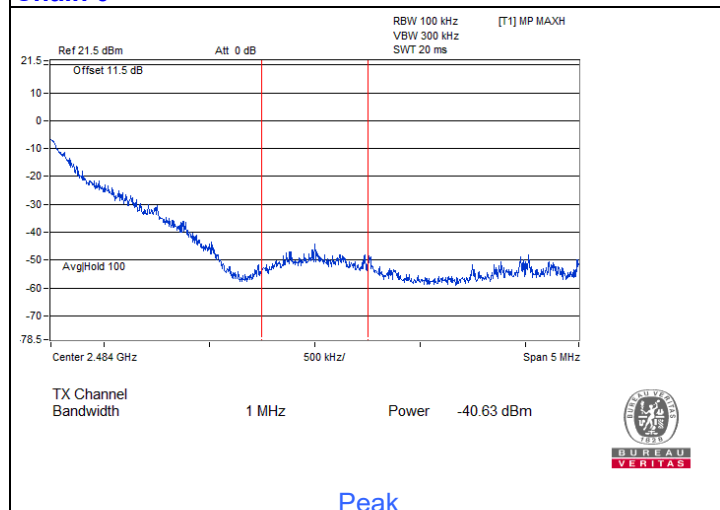

Chain 1

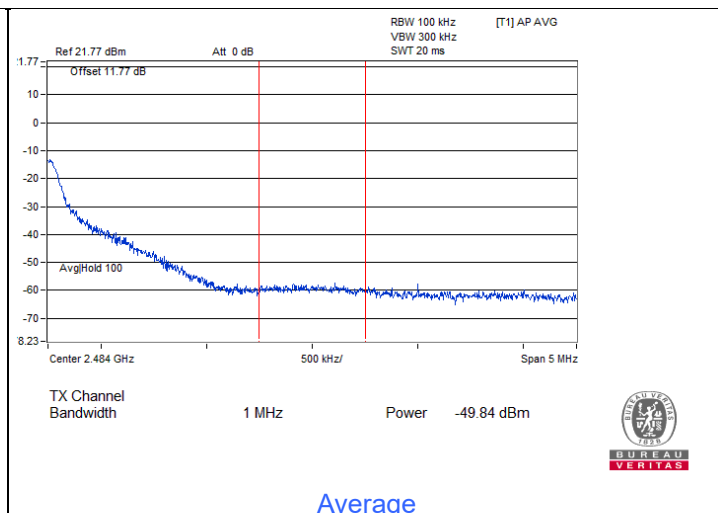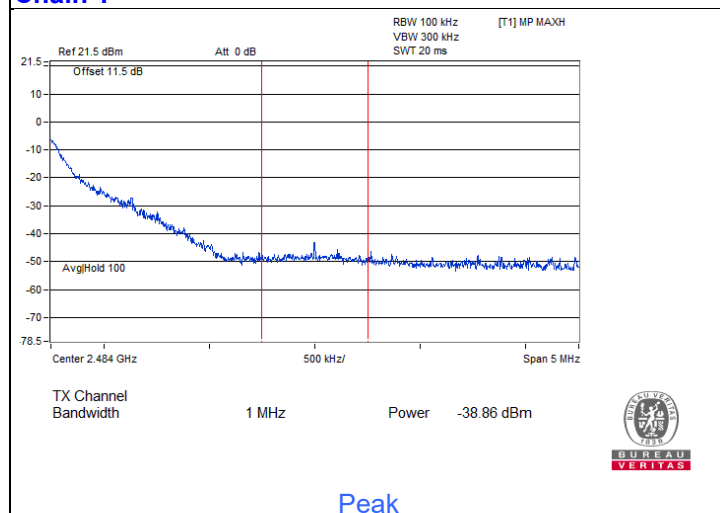

Mode B
1TX

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.1 PK	74.0	-31.9	1.78 H	273	40.4	1.7
2	4824.00	30.6 AV	54.0	-23.4	1.78 H	273	28.9	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.5 PK	74.0	-33.5	2.41 V	270	38.8	1.7
2	4824.00	29.6 AV	54.0	-24.4	2.41 V	270	27.9	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.1 PK	74.0	-30.9	1.71 H	275	41.4	1.7
2	4874.00	31.3 AV	54.0	-22.7	1.71 H	275	29.6	1.7
3	7311.00	45.1 PK	74.0	-28.9	2.39 H	271	38.3	6.8
4	7311.00	33.8 AV	54.0	-20.2	2.39 H	271	27.0	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.4 PK	74.0	-33.6	2.48 V	273	38.7	1.7
2	4874.00	29.4 AV	54.0	-24.6	2.48 V	273	27.7	1.7
3	7311.00	44.4 PK	74.0	-29.6	2.13 V	260	37.6	6.8
4	7311.00	33.3 AV	54.0	-20.7	2.13 V	260	26.5	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	43.8 PK	74.0	-30.2	1.71 H	277	42.0	1.8
2	4924.00	31.7 AV	54.0	-22.3	1.71 H	277	29.9	1.8
3	7386.00	44.5 PK	74.0	-29.5	2.35 H	261	37.2	7.3
4	7386.00	33.3 AV	54.0	-20.7	2.35 H	261	26.0	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.8 PK	74.0	-33.2	2.46 V	288	39.0	1.8
2	4924.00	29.8 AV	54.0	-24.2	2.46 V	288	28.0	1.8
3	7386.00	43.7 PK	74.0	-30.3	2.15 V	275	36.4	7.3
4	7386.00	32.9 AV	54.0	-21.1	2.15 V	275	25.6	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.9 PK	74.0	-31.1	1.75 H	269	41.0	1.9
2	4934.00	30.9 AV	54.0	-23.1	1.75 H	269	29.0	1.9
3	7401.00	45.1 PK	74.0	-28.9	2.40 H	285	37.7	7.4
4	7401.00	33.7 AV	54.0	-20.3	2.40 H	285	26.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.4 PK	74.0	-33.6	2.50 V	260	38.5	1.9
2	4934.00	29.6 AV	54.0	-24.4	2.50 V	260	27.7	1.9
3	7401.00	44.7 PK	74.0	-29.3	2.14 V	265	37.3	7.4
4	7401.00	33.7 AV	54.0	-20.3	2.14 V	265	26.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.6 PK	74.0	-31.4	1.70 H	289	40.7	1.9
2	4944.00	31.0 AV	54.0	-23.0	1.70 H	289	29.1	1.9
3	7416.00	44.9 PK	74.0	-29.1	2.42 H	260	37.5	7.4
4	7416.00	33.7 AV	54.0	-20.3	2.42 H	260	26.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.7 PK	74.0	-33.3	2.44 V	286	38.8	1.9
2	4944.00	29.8 AV	54.0	-24.2	2.44 V	286	27.9	1.9
3	7416.00	44.5 PK	74.0	-29.5	2.10 V	262	37.1	7.4
4	7416.00	33.1 AV	54.0	-20.9	2.10 V	262	25.7	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	43.2 PK	74.0	-30.8	1.76 H	264	41.5	1.7
2	4824.00	31.1 AV	54.0	-22.9	1.76 H	264	29.4	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.8 PK	74.0	-33.2	2.41 V	289	39.1	1.7
2	4824.00	30.0 AV	54.0	-24.0	2.41 V	289	28.3	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.2 PK	74.0	-30.8	1.73 H	291	41.5	1.7
2	4874.00	31.7 AV	54.0	-22.3	1.73 H	291	30.0	1.7
3	7311.00	45.6 PK	74.0	-28.4	2.34 H	264	38.8	6.8
4	7311.00	34.2 AV	54.0	-19.8	2.34 H	264	27.4	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.5 PK	74.0	-33.5	2.39 V	288	38.8	1.7
2	4874.00	29.8 AV	54.0	-24.2	2.39 V	288	28.1	1.7
3	7311.00	44.8 PK	74.0	-29.2	2.16 V	260	38.0	6.8
4	7311.00	33.3 AV	54.0	-20.7	2.16 V	260	26.5	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	43.6 PK	74.0	-30.4	1.76 H	276	41.8	1.8
2	4924.00	31.5 AV	54.0	-22.5	1.76 H	276	29.7	1.8
3	7386.00	45.2 PK	74.0	-28.8	2.43 H	259	37.9	7.3
4	7386.00	33.9 AV	54.0	-20.1	2.43 H	259	26.6	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.9 PK	74.0	-33.1	2.39 V	291	39.1	1.8
2	4924.00	30.1 AV	54.0	-23.9	2.39 V	291	28.3	1.8
3	7386.00	44.6 PK	74.0	-29.4	2.10 V	271	37.3	7.3
4	7386.00	33.3 AV	54.0	-20.7	2.10 V	271	26.0	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	43.4 PK	74.0	-30.6	1.66 H	283	41.5	1.9
2	4934.00	31.7 AV	54.0	-22.3	1.66 H	283	29.8	1.9
3	7401.00	44.7 PK	74.0	-29.3	2.43 H	256	37.3	7.4
4	7401.00	33.4 AV	54.0	-20.6	2.43 H	256	26.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.5 PK	74.0	-33.5	2.48 V	301	38.6	1.9
2	4934.00	29.8 AV	54.0	-24.2	2.48 V	301	27.9	1.9
3	7401.00	43.9 PK	74.0	-30.1	2.06 V	258	36.5	7.4
4	7401.00	32.7 AV	54.0	-21.3	2.06 V	258	25.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	43.5 PK	74.0	-30.5	1.76 H	281	41.6	1.9
2	4944.00	31.5 AV	54.0	-22.5	1.76 H	281	29.6	1.9
3	7416.00	44.5 PK	74.0	-29.5	2.40 H	283	37.1	7.4
4	7416.00	33.4 AV	54.0	-20.6	2.40 H	283	26.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.2 PK	74.0	-32.8	2.45 V	292	39.3	1.9
2	4944.00	30.2 AV	54.0	-23.8	2.45 V	292	28.3	1.9
3	7416.00	44.8 PK	74.0	-29.2	2.12 V	267	37.4	7.4
4	7416.00	33.3 AV	54.0	-20.7	2.12 V	267	25.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

1S1T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	43.2 PK	74.0	-30.8	1.67 H	272	41.5	1.7
2	4824.00	31.7 AV	54.0	-22.3	1.67 H	272	30.0	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.2 PK	74.0	-32.8	2.43 V	289	39.5	1.7
2	4824.00	30.0 AV	54.0	-24.0	2.43 V	289	28.3	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.7 PK	74.0	-30.3	1.70 H	285	42.0	1.7
2	4874.00	31.8 AV	54.0	-22.2	1.70 H	285	30.1	1.7
3	7311.00	45.2 PK	74.0	-28.8	2.35 H	281	38.4	6.8
4	7311.00	33.8 AV	54.0	-20.2	2.35 H	281	27.0	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.6 PK	74.0	-33.4	2.44 V	271	38.9	1.7
2	4874.00	29.6 AV	54.0	-24.4	2.44 V	271	27.9	1.7
3	7311.00	44.6 PK	74.0	-29.4	2.10 V	258	37.8	6.8
4	7311.00	33.4 AV	54.0	-20.6	2.10 V	258	26.6	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.9 PK	74.0	-31.1	1.75 H	263	41.1	1.8
2	4924.00	31.3 AV	54.0	-22.7	1.75 H	263	29.5	1.8
3	7386.00	44.8 PK	74.0	-29.2	2.33 H	262	37.5	7.3
4	7386.00	33.7 AV	54.0	-20.3	2.33 H	262	26.4	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.4 PK	74.0	-33.6	2.41 V	285	38.6	1.8
2	4924.00	29.3 AV	54.0	-24.7	2.41 V	285	27.5	1.8
3	7386.00	44.0 PK	74.0	-30.0	2.07 V	250	36.7	7.3
4	7386.00	32.8 AV	54.0	-21.2	2.07 V	250	25.5	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.8 PK	74.0	-31.2	1.66 H	275	40.9	1.9
2	4934.00	31.2 AV	54.0	-22.8	1.66 H	275	29.3	1.9
3	7401.00	44.9 PK	74.0	-29.1	2.43 H	265	37.5	7.4
4	7401.00	33.8 AV	54.0	-20.2	2.43 H	265	26.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.7 PK	74.0	-33.3	2.38 V	275	38.8	1.9
2	4934.00	29.6 AV	54.0	-24.4	2.38 V	275	27.7	1.9
3	7401.00	45.0 PK	74.0	-29.0	2.15 V	263	37.6	7.4
4	7401.00	33.5 AV	54.0	-20.5	2.15 V	263	26.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	43.4 PK	74.0	-30.6	1.67 H	263	41.5	1.9
2	4944.00	31.4 AV	54.0	-22.6	1.67 H	263	29.5	1.9
3	7416.00	44.9 PK	74.0	-29.1	2.33 H	270	37.5	7.4
4	7416.00	33.9 AV	54.0	-20.1	2.33 H	270	26.5	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.1 PK	74.0	-32.9	2.38 V	277	39.2	1.9
2	4944.00	30.3 AV	54.0	-23.7	2.38 V	277	28.4	1.9
3	7416.00	44.3 PK	74.0	-29.7	2.05 V	257	36.9	7.4
4	7416.00	32.8 AV	54.0	-21.2	2.05 V	257	25.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	43.5 PK	74.0	-30.5	1.72 H	286	41.8	1.7
2	4844.00	31.8 AV	54.0	-22.2	1.72 H	286	30.1	1.7
3	7266.00	45.7 PK	74.0	-28.3	2.36 H	256	38.8	6.9
4	7266.00	34.1 AV	54.0	-19.9	2.36 H	256	27.2	6.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	41.5 PK	74.0	-32.5	2.39 V	272	39.8	1.7
2	4844.00	30.3 AV	54.0	-23.7	2.39 V	272	28.6	1.7
3	7266.00	44.4 PK	74.0	-29.6	2.16 V	278	37.5	6.9
4	7266.00	33.0 AV	54.0	-21.0	2.16 V	278	26.1	6.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.6 PK	74.0	-31.4	1.72 H	288	40.9	1.7
2	4874.00	31.0 AV	54.0	-23.0	1.72 H	288	29.3	1.7
3	7311.00	45.5 PK	74.0	-28.5	2.44 H	267	38.7	6.8
4	7311.00	34.3 AV	54.0	-19.7	2.44 H	267	27.5	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.8 PK	74.0	-33.2	2.44 V	285	39.1	1.7
2	4874.00	29.8 AV	54.0	-24.2	2.44 V	285	28.1	1.7
3	7311.00	44.8 PK	74.0	-29.2	2.06 V	263	38.0	6.8
4	7311.00	33.3 AV	54.0	-20.7	2.06 V	263	26.5	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	43.4 PK	74.0	-30.6	1.65 H	268	41.7	1.7
2	4904.00	31.5 AV	54.0	-22.5	1.65 H	268	29.8	1.7
3	7356.00	45.1 PK	74.0	-28.9	2.41 H	266	38.0	7.1
4	7356.00	33.7 AV	54.0	-20.3	2.41 H	266	26.6	7.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	40.7 PK	74.0	-33.3	2.48 V	295	39.0	1.7
2	4904.00	29.6 AV	54.0	-24.4	2.48 V	295	27.9	1.7
3	7356.00	44.7 PK	74.0	-29.3	2.05 V	270	37.6	7.1
4	7356.00	33.6 AV	54.0	-20.4	2.05 V	270	26.5	7.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	42.7 PK	74.0	-31.3	1.69 H	280	41.0	1.7
2	4914.00	31.1 AV	54.0	-22.9	1.69 H	280	29.4	1.7
3	7371.00	45.0 PK	74.0	-29.0	2.37 H	264	37.8	7.2
4	7371.00	33.9 AV	54.0	-20.1	2.37 H	264	26.7	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	40.7 PK	74.0	-33.3	2.45 V	272	39.0	1.7
2	4914.00	30.0 AV	54.0	-24.0	2.45 V	272	28.3	1.7
3	7371.00	44.8 PK	74.0	-29.2	2.15 V	252	37.6	7.2
4	7371.00	33.2 AV	54.0	-20.8	2.15 V	252	26.0	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.5 PK	74.0	-31.5	1.75 H	264	40.7	1.8
2	4924.00	31.0 AV	54.0	-23.0	1.75 H	264	29.2	1.8
3	7386.00	45.3 PK	74.0	-28.7	2.35 H	268	38.0	7.3
4	7386.00	33.7 AV	54.0	-20.3	2.35 H	268	26.4	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.5 PK	74.0	-33.5	2.40 V	271	38.7	1.8
2	4924.00	29.4 AV	54.0	-24.6	2.40 V	271	27.6	1.8
3	7386.00	44.8 PK	74.0	-29.2	2.15 V	262	37.5	7.3
4	7386.00	33.4 AV	54.0	-20.6	2.15 V	262	26.1	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.7 PK	74.0	-33.3	1.76 H	296	39.0	1.7
2	4824.00	31.3 AV	54.0	-22.7	1.76 H	296	29.6	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.0 PK	74.0	-32.0	2.52 V	258	40.3	1.7
2	4824.00	30.3 AV	54.0	-23.7	2.52 V	258	28.6	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.1 PK	74.0	-32.9	1.73 H	293	39.4	1.7
2	4874.00	31.6 AV	54.0	-22.4	1.73 H	293	29.9	1.7
3	7311.00	46.0 PK	74.0	-28.0	2.51 H	279	39.2	6.8
4	7311.00	33.7 AV	54.0	-20.3	2.51 H	279	26.9	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.2 PK	74.0	-31.8	2.51 V	259	40.5	1.7
2	4874.00	30.4 AV	54.0	-23.6	2.51 V	259	28.7	1.7
3	7311.00	43.2 PK	74.0	-30.8	2.00 V	266	36.4	6.8
4	7311.00	32.7 AV	54.0	-21.3	2.00 V	266	25.9	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.0 PK	74.0	-32.0	1.71 H	281	40.2	1.8
2	4924.00	32.2 AV	54.0	-21.8	1.71 H	281	30.4	1.8
3	7386.00	45.8 PK	74.0	-28.2	2.48 H	262	38.5	7.3
4	7386.00	33.5 AV	54.0	-20.5	2.48 H	262	26.2	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	43.2 PK	74.0	-30.8	2.45 V	232	41.4	1.8
2	4924.00	31.2 AV	54.0	-22.8	2.45 V	232	29.4	1.8
3	7386.00	43.9 PK	74.0	-30.1	1.92 V	271	36.6	7.3
4	7386.00	33.0 AV	54.0	-21.0	1.92 V	271	25.7	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.6 PK	74.0	-32.4	1.74 H	296	39.7	1.9
2	4934.00	32.0 AV	54.0	-22.0	1.74 H	296	30.1	1.9
3	7401.00	45.1 PK	74.0	-28.9	2.48 H	266	37.7	7.4
4	7401.00	32.9 AV	54.0	-21.1	2.48 H	266	25.5	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	43.1 PK	74.0	-30.9	2.42 V	254	41.2	1.9
2	4934.00	31.2 AV	54.0	-22.8	2.42 V	254	29.3	1.9
3	7401.00	44.3 PK	74.0	-29.7	1.98 V	270	36.9	7.4
4	7401.00	33.3 AV	54.0	-20.7	1.98 V	270	25.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.8 PK	74.0	-32.2	1.71 H	312	39.9	1.9
2	4944.00	32.0 AV	54.0	-22.0	1.71 H	312	30.1	1.9
3	7416.00	45.9 PK	74.0	-28.1	2.44 H	277	38.5	7.4
4	7416.00	33.8 AV	54.0	-20.2	2.44 H	277	26.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.4 PK	74.0	-31.6	2.51 V	242	40.5	1.9
2	4944.00	30.8 AV	54.0	-23.2	2.51 V	242	28.9	1.9
3	7416.00	43.3 PK	74.0	-30.7	1.89 V	247	35.9	7.4
4	7416.00	32.5 AV	54.0	-21.5	1.89 V	247	25.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.7 PK	74.0	-32.3	1.76 H	284	40.0	1.7
2	4824.00	32.0 AV	54.0	-22.0	1.76 H	284	30.3	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.4 PK	74.0	-31.6	2.47 V	258	40.7	1.7
2	4824.00	30.6 AV	54.0	-23.4	2.47 V	258	28.9	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.5 PK	74.0	-32.5	1.80 H	298	39.8	1.7
2	4874.00	31.6 AV	54.0	-22.4	1.80 H	298	29.9	1.7
3	7311.00	45.4 PK	74.0	-28.6	2.48 H	272	38.6	6.8
4	7311.00	32.8 AV	54.0	-21.2	2.48 H	272	26.0	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.1 PK	74.0	-31.9	2.52 V	251	40.4	1.7
2	4874.00	30.4 AV	54.0	-23.6	2.52 V	251	28.7	1.7
3	7311.00	44.3 PK	74.0	-29.7	1.97 V	268	37.5	6.8
4	7311.00	33.4 AV	54.0	-20.6	1.97 V	268	26.6	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.8 PK	74.0	-32.2	1.73 H	308	40.0	1.8
2	4924.00	32.2 AV	54.0	-21.8	1.73 H	308	30.4	1.8
3	7386.00	46.0 PK	74.0	-28.0	2.54 H	276	38.7	7.3
4	7386.00	33.3 AV	54.0	-20.7	2.54 H	276	26.0	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	43.0 PK	74.0	-31.0	2.42 V	239	41.2	1.8
2	4924.00	31.0 AV	54.0	-23.0	2.42 V	239	29.2	1.8
3	7386.00	44.0 PK	74.0	-30.0	1.97 V	268	36.7	7.3
4	7386.00	33.4 AV	54.0	-20.6	1.97 V	268	26.1	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.0 PK	74.0	-33.0	1.76 H	296	39.1	1.9
2	4934.00	31.7 AV	54.0	-22.3	1.76 H	296	29.8	1.9
3	7401.00	45.8 PK	74.0	-28.2	2.51 H	277	38.4	7.4
4	7401.00	33.7 AV	54.0	-20.3	2.51 H	277	26.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	43.0 PK	74.0	-31.0	2.49 V	256	41.1	1.9
2	4934.00	31.1 AV	54.0	-22.9	2.49 V	256	29.2	1.9
3	7401.00	44.2 PK	74.0	-29.8	1.92 V	263	36.8	7.4
4	7401.00	33.5 AV	54.0	-20.5	1.92 V	263	26.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.3 PK	74.0	-32.7	1.76 H	309	39.4	1.9
2	4944.00	31.8 AV	54.0	-22.2	1.76 H	309	29.9	1.9
3	7416.00	45.2 PK	74.0	-28.8	2.55 H	274	37.8	7.4
4	7416.00	33.0 AV	54.0	-21.0	2.55 H	274	25.6	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	43.1 PK	74.0	-30.9	2.52 V	238	41.2	1.9
2	4944.00	31.2 AV	54.0	-22.8	2.52 V	238	29.3	1.9
3	7416.00	44.2 PK	74.0	-29.8	1.90 V	249	36.8	7.4
4	7416.00	33.3 AV	54.0	-20.7	1.90 V	249	25.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.8 PK	74.0	-32.2	1.82 H	288	40.1	1.7
2	4824.00	31.9 AV	54.0	-22.1	1.82 H	288	30.2	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.4 PK	74.0	-31.6	2.47 V	231	40.7	1.7
2	4824.00	30.9 AV	54.0	-23.1	2.47 V	231	29.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.1 PK	74.0	-32.9	1.71 H	301	39.4	1.7
2	4874.00	31.4 AV	54.0	-22.6	1.71 H	301	29.7	1.7
3	7311.00	45.5 PK	74.0	-28.5	2.50 H	280	38.7	6.8
4	7311.00	33.3 AV	54.0	-20.7	2.50 H	280	26.5	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.2 PK	74.0	-30.8	2.49 V	255	41.5	1.7
2	4874.00	31.2 AV	54.0	-22.8	2.49 V	255	29.5	1.7
3	7311.00	43.8 PK	74.0	-30.2	1.98 V	265	37.0	6.8
4	7311.00	33.2 AV	54.0	-20.8	1.98 V	265	26.4	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.3 PK	74.0	-32.7	1.76 H	293	39.5	1.8
2	4924.00	31.9 AV	54.0	-22.1	1.76 H	293	30.1	1.8
3	7386.00	45.3 PK	74.0	-28.7	2.45 H	277	38.0	7.3
4	7386.00	32.9 AV	54.0	-21.1	2.45 H	277	25.6	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.0 PK	74.0	-32.0	2.52 V	228	40.2	1.8
2	4924.00	30.3 AV	54.0	-23.7	2.52 V	228	28.5	1.8
3	7386.00	43.6 PK	74.0	-30.4	1.97 V	258	36.3	7.3
4	7386.00	32.6 AV	54.0	-21.4	1.97 V	258	25.3	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.5 PK	74.0	-32.5	1.80 H	289	39.6	1.9
2	4934.00	32.0 AV	54.0	-22.0	1.80 H	289	30.1	1.9
3	7401.00	45.6 PK	74.0	-28.4	2.54 H	271	38.2	7.4
4	7401.00	33.5 AV	54.0	-20.5	2.54 H	271	26.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.3 PK	74.0	-31.7	2.52 V	250	40.4	1.9
2	4934.00	30.7 AV	54.0	-23.3	2.52 V	250	28.8	1.9
3	7401.00	44.0 PK	74.0	-30.0	1.96 V	273	36.6	7.4
4	7401.00	33.1 AV	54.0	-20.9	1.96 V	273	25.7	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.1 PK	74.0	-32.9	1.79 H	296	39.2	1.9
2	4944.00	31.6 AV	54.0	-22.4	1.79 H	296	29.7	1.9
3	7416.00	45.4 PK	74.0	-28.6	2.43 H	271	38.0	7.4
4	7416.00	33.1 AV	54.0	-20.9	2.43 H	271	25.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.4 PK	74.0	-31.6	2.53 V	258	40.5	1.9
2	4944.00	30.4 AV	54.0	-23.6	2.53 V	258	28.5	1.9
3	7416.00	43.6 PK	74.0	-30.4	1.90 V	268	36.2	7.4
4	7416.00	32.7 AV	54.0	-21.3	1.90 V	268	25.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.2 PK	74.0	-32.8	1.79 H	288	39.5	1.7
2	4824.00	31.4 AV	54.0	-22.6	1.79 H	288	29.7	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.3 PK	74.0	-31.7	2.46 V	249	40.6	1.7
2	4824.00	30.6 AV	54.0	-23.4	2.46 V	249	28.9	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.2 PK	74.0	-32.8	1.83 H	312	39.5	1.7
2	4874.00	31.9 AV	54.0	-22.1	1.83 H	312	30.2	1.7
3	7311.00	45.9 PK	74.0	-28.1	2.46 H	264	39.1	6.8
4	7311.00	33.3 AV	54.0	-20.7	2.46 H	264	26.5	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.1 PK	74.0	-30.9	2.48 V	228	41.4	1.7
2	4874.00	31.2 AV	54.0	-22.8	2.48 V	228	29.5	1.7
3	7311.00	43.2 PK	74.0	-30.8	1.99 V	248	36.4	6.8
4	7311.00	32.6 AV	54.0	-21.4	1.99 V	248	25.8	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.1 PK	74.0	-32.9	1.78 H	299	39.3	1.8
2	4924.00	31.6 AV	54.0	-22.4	1.78 H	299	29.8	1.8
3	7386.00	45.7 PK	74.0	-28.3	2.46 H	256	38.4	7.3
4	7386.00	33.2 AV	54.0	-20.8	2.46 H	256	25.9	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	43.0 PK	74.0	-31.0	2.44 V	256	41.2	1.8
2	4924.00	31.3 AV	54.0	-22.7	2.44 V	256	29.5	1.8
3	7386.00	43.6 PK	74.0	-30.4	1.91 V	259	36.3	7.3
4	7386.00	33.1 AV	54.0	-20.9	1.91 V	259	25.8	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.3 PK	74.0	-32.7	1.82 H	295	39.4	1.9
2	4934.00	31.6 AV	54.0	-22.4	1.82 H	295	29.7	1.9
3	7401.00	45.9 PK	74.0	-28.1	2.44 H	278	38.5	7.4
4	7401.00	33.4 AV	54.0	-20.6	2.44 H	278	26.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.6 PK	74.0	-31.4	2.46 V	246	40.7	1.9
2	4934.00	30.8 AV	54.0	-23.2	2.46 V	246	28.9	1.9
3	7401.00	44.0 PK	74.0	-30.0	1.96 V	246	36.6	7.4
4	7401.00	32.9 AV	54.0	-21.1	1.96 V	246	25.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.8 PK	74.0	-32.2	1.79 H	296	39.9	1.9
2	4944.00	32.0 AV	54.0	-22.0	1.79 H	296	30.1	1.9
3	7416.00	45.8 PK	74.0	-28.2	2.46 H	261	38.4	7.4
4	7416.00	33.6 AV	54.0	-20.4	2.46 H	261	26.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.3 PK	74.0	-31.7	2.49 V	252	40.4	1.9
2	4944.00	30.4 AV	54.0	-23.6	2.49 V	252	28.5	1.9
3	7416.00	44.1 PK	74.0	-29.9	1.97 V	252	36.7	7.4
4	7416.00	33.2 AV	54.0	-20.8	1.97 V	252	25.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.4 PK	74.0	-32.6	1.73 H	286	39.7	1.7
2	4824.00	32.0 AV	54.0	-22.0	1.73 H	286	30.3	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.8 PK	74.0	-31.2	2.47 V	236	41.1	1.7
2	4824.00	31.1 AV	54.0	-22.9	2.47 V	236	29.4	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.8 PK	74.0	-32.2	1.82 H	291	40.1	1.7
2	4874.00	32.3 AV	54.0	-21.7	1.82 H	291	30.6	1.7
3	7311.00	45.5 PK	74.0	-28.5	2.43 H	265	38.7	6.8
4	7311.00	33.1 AV	54.0	-20.9	2.43 H	265	26.3	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.3 PK	74.0	-31.7	2.47 V	230	40.6	1.7
2	4874.00	30.7 AV	54.0	-23.3	2.47 V	230	29.0	1.7
3	7311.00	43.9 PK	74.0	-30.1	1.89 V	258	37.1	6.8
4	7311.00	33.4 AV	54.0	-20.6	1.89 V	258	26.6	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.9 PK	74.0	-32.1	1.80 H	308	40.1	1.8
2	4924.00	32.2 AV	54.0	-21.8	1.80 H	308	30.4	1.8
3	7386.00	45.6 PK	74.0	-28.4	2.48 H	283	38.3	7.3
4	7386.00	33.4 AV	54.0	-20.6	2.48 H	283	26.1	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.3 PK	74.0	-31.7	2.51 V	249	40.5	1.8
2	4924.00	30.6 AV	54.0	-23.4	2.51 V	249	28.8	1.8
3	7386.00	43.5 PK	74.0	-30.5	1.94 V	244	36.2	7.3
4	7386.00	32.9 AV	54.0	-21.1	1.94 V	244	25.6	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.9 PK	74.0	-33.1	1.72 H	293	39.0	1.9
2	4934.00	31.4 AV	54.0	-22.6	1.72 H	293	29.5	1.9
3	7401.00	45.9 PK	74.0	-28.1	2.43 H	276	38.5	7.4
4	7401.00	33.5 AV	54.0	-20.5	2.43 H	276	26.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.4 PK	74.0	-31.6	2.42 V	254	40.5	1.9
2	4934.00	30.8 AV	54.0	-23.2	2.42 V	254	28.9	1.9
3	7401.00	43.8 PK	74.0	-30.2	1.91 V	259	36.4	7.4
4	7401.00	33.2 AV	54.0	-20.8	1.91 V	259	25.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.4 PK	74.0	-32.6	1.76 H	293	39.5	1.9
2	4944.00	31.6 AV	54.0	-22.4	1.76 H	293	29.7	1.9
3	7416.00	45.4 PK	74.0	-28.6	2.49 H	261	38.0	7.4
4	7416.00	33.0 AV	54.0	-21.0	2.49 H	261	25.6	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.0 PK	74.0	-32.0	2.45 V	230	40.1	1.9
2	4944.00	30.3 AV	54.0	-23.7	2.45 V	230	28.4	1.9
3	7416.00	44.3 PK	74.0	-29.7	1.88 V	266	36.9	7.4
4	7416.00	33.2 AV	54.0	-20.8	1.88 V	266	25.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

Mode B

2TX

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.0 PK	74.0	-32.0	1.68 H	258	40.3	1.7
2	4824.00	30.4 AV	54.0	-23.6	1.68 H	258	28.7	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.4 PK	74.0	-31.6	2.54 V	275	40.7	1.7
2	4824.00	30.3 AV	54.0	-23.7	2.54 V	275	28.6	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.8 PK	74.0	-32.2	1.75 H	245	40.1	1.7
2	4874.00	30.3 AV	54.0	-23.7	1.75 H	245	28.6	1.7
3	7311.00	45.2 PK	74.0	-28.8	2.50 H	282	38.4	6.8
4	7311.00	33.4 AV	54.0	-20.6	2.50 H	282	26.6	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.7 PK	74.0	-31.3	2.50 V	269	41.0	1.7
2	4874.00	30.4 AV	54.0	-23.6	2.50 V	269	28.7	1.7
3	7311.00	45.5 PK	74.0	-28.5	2.08 V	219	38.7	6.8
4	7311.00	33.0 AV	54.0	-21.0	2.08 V	219	26.2	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.4 PK	74.0	-32.6	1.73 H	255	39.6	1.8
2	4924.00	29.9 AV	54.0	-24.1	1.73 H	255	28.1	1.8
3	7386.00	44.9 PK	74.0	-29.1	2.50 H	290	37.6	7.3
4	7386.00	33.1 AV	54.0	-20.9	2.50 H	290	25.8	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.7 PK	74.0	-31.3	2.46 V	268	40.9	1.8
2	4924.00	30.2 AV	54.0	-23.8	2.46 V	268	28.4	1.8
3	7386.00	45.1 PK	74.0	-28.9	2.10 V	209	37.8	7.3
4	7386.00	32.9 AV	54.0	-21.1	2.10 V	209	25.6	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.6 PK	74.0	-32.4	1.76 H	255	39.7	1.9
2	4934.00	29.9 AV	54.0	-24.1	1.76 H	255	28.0	1.9
3	7401.00	45.2 PK	74.0	-28.8	2.50 H	278	37.8	7.4
4	7401.00	33.1 AV	54.0	-20.9	2.50 H	278	25.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.6 PK	74.0	-31.4	2.47 V	269	40.7	1.9
2	4934.00	30.6 AV	54.0	-23.4	2.47 V	269	28.7	1.9
3	7401.00	45.7 PK	74.0	-28.3	2.10 V	231	38.3	7.4
4	7401.00	33.2 AV	54.0	-20.8	2.10 V	231	25.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.5 PK	74.0	-32.5	1.81 H	257	39.6	1.9
2	4944.00	30.1 AV	54.0	-23.9	1.81 H	257	28.2	1.9
3	7416.00	44.6 PK	74.0	-29.4	2.49 H	280	37.2	7.4
4	7416.00	33.0 AV	54.0	-21.0	2.49 H	280	25.6	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	43.1 PK	74.0	-30.9	2.49 V	265	41.2	1.9
2	4944.00	30.5 AV	54.0	-23.5	2.49 V	265	28.6	1.9
3	7416.00	45.6 PK	74.0	-28.4	2.08 V	224	38.2	7.4
4	7416.00	33.2 AV	54.0	-20.8	2.08 V	224	25.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.3 PK	74.0	-31.7	1.72 H	244	40.6	1.7
2	4824.00	30.7 AV	54.0	-23.3	1.72 H	244	29.0	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.5 PK	74.0	-31.5	2.52 V	257	40.8	1.7
2	4824.00	30.4 AV	54.0	-23.6	2.52 V	257	28.7	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.8 PK	74.0	-32.2	1.75 H	252	40.1	1.7
2	4874.00	30.4 AV	54.0	-23.6	1.75 H	252	28.7	1.7
3	7311.00	45.0 PK	74.0	-29.0	2.47 H	268	38.2	6.8
4	7311.00	33.3 AV	54.0	-20.7	2.47 H	268	26.5	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.9 PK	74.0	-31.1	2.50 V	265	41.2	1.7
2	4874.00	30.8 AV	54.0	-23.2	2.50 V	265	29.1	1.7
3	7311.00	45.6 PK	74.0	-28.4	2.14 V	217	38.8	6.8
4	7311.00	32.9 AV	54.0	-21.1	2.14 V	217	26.1	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.2 PK	74.0	-31.8	1.79 H	250	40.4	1.8
2	4924.00	30.4 AV	54.0	-23.6	1.79 H	250	28.6	1.8
3	7386.00	45.1 PK	74.0	-28.9	2.55 H	273	37.8	7.3
4	7386.00	33.4 AV	54.0	-20.6	2.55 H	273	26.1	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	43.0 PK	74.0	-31.0	2.50 V	276	41.2	1.8
2	4924.00	30.6 AV	54.0	-23.4	2.50 V	276	28.8	1.8
3	7386.00	45.1 PK	74.0	-28.9	2.10 V	223	37.8	7.3
4	7386.00	32.6 AV	54.0	-21.4	2.10 V	223	25.3	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.2 PK	74.0	-31.8	1.80 H	256	40.3	1.9
2	4934.00	30.8 AV	54.0	-23.2	1.80 H	256	28.9	1.9
3	7401.00	44.9 PK	74.0	-29.1	2.50 H	292	37.5	7.4
4	7401.00	33.2 AV	54.0	-20.8	2.50 H	292	25.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.9 PK	74.0	-31.1	2.48 V	258	41.0	1.9
2	4934.00	30.6 AV	54.0	-23.4	2.48 V	258	28.7	1.9
3	7401.00	45.7 PK	74.0	-28.3	2.10 V	233	38.3	7.4
4	7401.00	33.1 AV	54.0	-20.9	2.10 V	233	25.7	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.9 PK	74.0	-32.1	1.77 H	241	40.0	1.9
2	4944.00	30.2 AV	54.0	-23.8	1.77 H	241	28.3	1.9
3	7416.00	45.1 PK	74.0	-28.9	2.45 H	280	37.7	7.4
4	7416.00	33.1 AV	54.0	-20.9	2.45 H	280	25.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.4 PK	74.0	-31.6	2.56 V	263	40.5	1.9
2	4944.00	30.0 AV	54.0	-24.0	2.56 V	263	28.1	1.9
3	7416.00	45.3 PK	74.0	-28.7	2.08 V	233	37.9	7.4
4	7416.00	32.7 AV	54.0	-21.3	2.08 V	233	25.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.6 PK	74.0	-32.4	1.73 H	231	39.9	1.7
2	4824.00	30.3 AV	54.0	-23.7	1.73 H	231	28.6	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.4 PK	74.0	-31.6	2.47 V	258	40.7	1.7
2	4824.00	30.2 AV	54.0	-23.8	2.47 V	258	28.5	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.5 PK	74.0	-31.5	1.77 H	243	40.8	1.7
2	4874.00	30.7 AV	54.0	-23.3	1.77 H	243	29.0	1.7
3	7311.00	45.9 PK	74.0	-28.1	2.46 H	270	39.1	6.8
4	7311.00	33.8 AV	54.0	-20.2	2.46 H	270	27.0	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.1 PK	74.0	-31.9	2.52 V	283	40.4	1.7
2	4874.00	30.0 AV	54.0	-24.0	2.52 V	283	28.3	1.7
3	7311.00	45.5 PK	74.0	-28.5	2.07 V	221	38.7	6.8
4	7311.00	32.8 AV	54.0	-21.2	2.07 V	221	26.0	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.6 PK	74.0	-32.4	1.77 H	251	39.8	1.8
2	4924.00	30.1 AV	54.0	-23.9	1.77 H	251	28.3	1.8
3	7386.00	45.5 PK	74.0	-28.5	2.45 H	286	38.2	7.3
4	7386.00	33.6 AV	54.0	-20.4	2.45 H	286	26.3	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.8 PK	74.0	-31.2	2.55 V	284	41.0	1.8
2	4924.00	30.5 AV	54.0	-23.5	2.55 V	284	28.7	1.8
3	7386.00	45.3 PK	74.0	-28.7	2.08 V	221	38.0	7.3
4	7386.00	32.7 AV	54.0	-21.3	2.08 V	221	25.4	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.3 PK	74.0	-31.7	1.75 H	250	40.4	1.9
2	4934.00	30.8 AV	54.0	-23.2	1.75 H	250	28.9	1.9
3	7401.00	44.9 PK	74.0	-29.1	2.47 H	296	37.5	7.4
4	7401.00	33.2 AV	54.0	-20.8	2.47 H	296	25.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.9 PK	74.0	-31.1	2.47 V	265	41.0	1.9
2	4934.00	30.8 AV	54.0	-23.2	2.47 V	265	28.9	1.9
3	7401.00	45.7 PK	74.0	-28.3	2.04 V	225	38.3	7.4
4	7401.00	33.4 AV	54.0	-20.6	2.04 V	225	26.0	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.4 PK	74.0	-32.6	1.77 H	244	39.5	1.9
2	4944.00	29.8 AV	54.0	-24.2	1.77 H	244	27.9	1.9
3	7416.00	44.7 PK	74.0	-29.3	2.46 H	280	37.3	7.4
4	7416.00	32.9 AV	54.0	-21.1	2.46 H	280	25.5	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.4 PK	74.0	-31.6	2.47 V	265	40.5	1.9
2	4944.00	30.0 AV	54.0	-24.0	2.47 V	265	28.1	1.9
3	7416.00	44.7 PK	74.0	-29.3	2.03 V	214	37.3	7.4
4	7416.00	32.5 AV	54.0	-21.5	2.03 V	214	25.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	41.8 PK	74.0	-32.2	1.71 H	259	40.1	1.7
2	4844.00	30.6 AV	54.0	-23.4	1.71 H	259	28.9	1.7
3	7266.00	45.0 PK	74.0	-29.0	2.46 H	280	38.1	6.9
4	7266.00	33.5 AV	54.0	-20.5	2.46 H	280	26.6	6.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	43.4 PK	74.0	-30.6	2.49 V	278	41.7	1.7
2	4844.00	30.8 AV	54.0	-23.2	2.49 V	278	29.1	1.7
3	7266.00	45.5 PK	74.0	-28.5	2.06 V	212	38.6	6.9
4	7266.00	33.3 AV	54.0	-20.7	2.06 V	212	26.4	6.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.6 PK	74.0	-32.4	1.81 H	244	39.9	1.7
2	4874.00	30.4 AV	54.0	-23.6	1.81 H	244	28.7	1.7
3	7311.00	44.9 PK	74.0	-29.1	2.48 H	273	38.1	6.8
4	7311.00	33.0 AV	54.0	-21.0	2.48 H	273	26.2	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.6 PK	74.0	-31.4	2.47 V	275	40.9	1.7
2	4874.00	30.1 AV	54.0	-23.9	2.47 V	275	28.4	1.7
3	7311.00	45.3 PK	74.0	-28.7	2.06 V	207	38.5	6.8
4	7311.00	32.8 AV	54.0	-21.2	2.06 V	207	26.0	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	41.7 PK	74.0	-32.3	1.69 H	257	40.0	1.7
2	4904.00	30.4 AV	54.0	-23.6	1.69 H	257	28.7	1.7
3	7356.00	45.7 PK	74.0	-28.3	2.51 H	268	38.6	7.1
4	7356.00	33.6 AV	54.0	-20.4	2.51 H	268	26.5	7.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	42.9 PK	74.0	-31.1	2.45 V	267	41.2	1.7
2	4904.00	30.4 AV	54.0	-23.6	2.45 V	267	28.7	1.7
3	7356.00	45.0 PK	74.0	-29.0	2.10 V	221	37.9	7.1
4	7356.00	32.6 AV	54.0	-21.4	2.10 V	221	25.5	7.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	41.2 PK	74.0	-32.8	1.80 H	258	39.5	1.7
2	4914.00	30.0 AV	54.0	-24.0	1.80 H	258	28.3	1.7
3	7371.00	44.7 PK	74.0	-29.3	2.49 H	288	37.5	7.2
4	7371.00	33.2 AV	54.0	-20.8	2.49 H	288	26.0	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	42.7 PK	74.0	-31.3	2.56 V	266	41.0	1.7
2	4914.00	30.5 AV	54.0	-23.5	2.56 V	266	28.8	1.7
3	7371.00	46.1 PK	74.0	-27.9	2.11 V	220	38.9	7.2
4	7371.00	33.4 AV	54.0	-20.6	2.11 V	220	26.2	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.7 PK	74.0	-32.3	1.70 H	258	39.9	1.8
2	4924.00	30.3 AV	54.0	-23.7	1.70 H	258	28.5	1.8
3	7386.00	45.2 PK	74.0	-28.8	2.45 H	280	37.9	7.3
4	7386.00	33.4 AV	54.0	-20.6	2.45 H	280	26.1	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.5 PK	74.0	-31.5	2.54 V	266	40.7	1.8
2	4924.00	30.0 AV	54.0	-24.0	2.54 V	266	28.2	1.8
3	7386.00	45.5 PK	74.0	-28.5	2.04 V	208	38.2	7.3
4	7386.00	33.1 AV	54.0	-20.9	2.04 V	208	25.8	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	39.8 PK	74.0	-34.2	1.76 H	285	38.1	1.7
2	4824.00	31.0 AV	54.0	-23.0	1.76 H	285	29.3	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.3 PK	74.0	-31.7	2.30 V	277	40.6	1.7
2	4824.00	30.5 AV	54.0	-23.5	2.30 V	277	28.8	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.9 PK	74.0	-33.1	1.78 H	281	39.2	1.7
2	4874.00	31.6 AV	54.0	-22.4	1.78 H	281	29.9	1.7
3	7311.00	47.0 PK	74.0	-27.0	2.45 H	306	40.2	6.8
4	7311.00	35.1 AV	54.0	-18.9	2.45 H	306	28.3	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.8 PK	74.0	-31.2	2.30 V	269	41.1	1.7
2	4874.00	31.1 AV	54.0	-22.9	2.30 V	269	29.4	1.7
3	7311.00	44.6 PK	74.0	-29.4	2.04 V	250	37.8	6.8
4	7311.00	33.9 AV	54.0	-20.1	2.04 V	250	27.1	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.2 PK	74.0	-33.8	1.83 H	276	38.4	1.8
2	4924.00	30.9 AV	54.0	-23.1	1.83 H	276	29.1	1.8
3	7386.00	46.8 PK	74.0	-27.2	2.39 H	307	39.5	7.3
4	7386.00	34.6 AV	54.0	-19.4	2.39 H	307	27.3	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.1 PK	74.0	-31.9	2.31 V	288	40.3	1.8
2	4924.00	30.3 AV	54.0	-23.7	2.31 V	288	28.5	1.8
3	7386.00	44.5 PK	74.0	-29.5	2.03 V	259	37.2	7.3
4	7386.00	33.6 AV	54.0	-20.4	2.03 V	259	26.3	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.2 PK	74.0	-33.8	1.78 H	282	38.3	1.9
2	4934.00	31.0 AV	54.0	-23.0	1.78 H	282	29.1	1.9
3	7401.00	47.4 PK	74.0	-26.6	2.38 H	297	40.0	7.4
4	7401.00	35.3 AV	54.0	-18.7	2.38 H	297	27.9	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.8 PK	74.0	-32.2	2.24 V	275	39.9	1.9
2	4934.00	30.2 AV	54.0	-23.8	2.24 V	275	28.3	1.9
3	7401.00	44.5 PK	74.0	-29.5	2.05 V	234	37.1	7.4
4	7401.00	33.6 AV	54.0	-20.4	2.05 V	234	26.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.2 PK	74.0	-33.8	1.78 H	281	38.3	1.9
2	4944.00	31.1 AV	54.0	-22.9	1.78 H	281	29.2	1.9
3	7416.00	47.0 PK	74.0	-27.0	2.46 H	301	39.6	7.4
4	7416.00	35.1 AV	54.0	-18.9	2.46 H	301	27.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.7 PK	74.0	-31.3	2.32 V	276	40.8	1.9
2	4944.00	30.9 AV	54.0	-23.1	2.32 V	276	29.0	1.9
3	7416.00	44.2 PK	74.0	-29.8	2.00 V	243	36.8	7.4
4	7416.00	33.5 AV	54.0	-20.5	2.00 V	243	26.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	39.8 PK	74.0	-34.2	1.75 H	270	38.1	1.7
2	4824.00	30.8 AV	54.0	-23.2	1.75 H	270	29.1	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.6 PK	74.0	-31.4	2.31 V	281	40.9	1.7
2	4824.00	31.0 AV	54.0	-23.0	2.31 V	281	29.3	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.2 PK	74.0	-33.8	1.84 H	281	38.5	1.7
2	4874.00	31.4 AV	54.0	-22.6	1.84 H	281	29.7	1.7
3	7311.00	47.3 PK	74.0	-26.7	2.38 H	289	40.5	6.8
4	7311.00	35.0 AV	54.0	-19.0	2.38 H	289	28.2	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.8 PK	74.0	-32.2	2.28 V	288	40.1	1.7
2	4874.00	30.3 AV	54.0	-23.7	2.28 V	288	28.6	1.7
3	7311.00	44.0 PK	74.0	-30.0	2.01 V	240	37.2	6.8
4	7311.00	33.2 AV	54.0	-20.8	2.01 V	240	26.4	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	39.8 PK	74.0	-34.2	1.78 H	287	38.0	1.8
2	4924.00	30.7 AV	54.0	-23.3	1.78 H	287	28.9	1.8
3	7386.00	47.0 PK	74.0	-27.0	2.43 H	301	39.7	7.3
4	7386.00	34.6 AV	54.0	-19.4	2.43 H	301	27.3	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.4 PK	74.0	-31.6	2.28 V	272	40.6	1.8
2	4924.00	30.8 AV	54.0	-23.2	2.28 V	272	29.0	1.8
3	7386.00	44.5 PK	74.0	-29.5	2.05 V	256	37.2	7.3
4	7386.00	33.7 AV	54.0	-20.3	2.05 V	256	26.4	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	39.8 PK	74.0	-34.2	1.78 H	268	37.9	1.9
2	4934.00	30.8 AV	54.0	-23.2	1.78 H	268	28.9	1.9
3	7401.00	47.3 PK	74.0	-26.7	2.43 H	301	39.9	7.4
4	7401.00	35.1 AV	54.0	-18.9	2.43 H	301	27.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.4 PK	74.0	-31.6	2.33 V	285	40.5	1.9
2	4934.00	30.8 AV	54.0	-23.2	2.33 V	285	28.9	1.9
3	7401.00	44.2 PK	74.0	-29.8	1.97 V	262	36.8	7.4
4	7401.00	33.2 AV	54.0	-20.8	1.97 V	262	25.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.0 PK	74.0	-34.0	1.81 H	275	38.1	1.9
2	4944.00	31.1 AV	54.0	-22.9	1.81 H	275	29.2	1.9
3	7416.00	47.2 PK	74.0	-26.8	2.41 H	293	39.8	7.4
4	7416.00	35.0 AV	54.0	-19.0	2.41 H	293	27.6	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.4 PK	74.0	-31.6	2.29 V	286	40.5	1.9
2	4944.00	30.9 AV	54.0	-23.1	2.29 V	286	29.0	1.9
3	7416.00	44.4 PK	74.0	-29.6	2.02 V	260	37.0	7.4
4	7416.00	33.6 AV	54.0	-20.4	2.02 V	260	26.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.7 PK	74.0	-33.3	1.74 H	277	39.0	1.7
2	4824.00	31.5 AV	54.0	-22.5	1.74 H	277	29.8	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.5 PK	74.0	-31.5	2.34 V	281	40.8	1.7
2	4824.00	30.8 AV	54.0	-23.2	2.34 V	281	29.1	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.8 PK	74.0	-33.2	1.76 H	292	39.1	1.7
2	4874.00	31.7 AV	54.0	-22.3	1.76 H	292	30.0	1.7
3	7311.00	47.2 PK	74.0	-26.8	2.47 H	302	40.4	6.8
4	7311.00	35.2 AV	54.0	-18.8	2.47 H	302	28.4	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.5 PK	74.0	-31.5	2.30 V	280	40.8	1.7
2	4874.00	30.6 AV	54.0	-23.4	2.30 V	280	28.9	1.7
3	7311.00	44.3 PK	74.0	-29.7	2.02 V	234	37.5	6.8
4	7311.00	33.3 AV	54.0	-20.7	2.02 V	234	26.5	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.6 PK	74.0	-33.4	1.74 H	276	38.8	1.8
2	4924.00	31.4 AV	54.0	-22.6	1.74 H	276	29.6	1.8
3	7386.00	46.6 PK	74.0	-27.4	2.43 H	295	39.3	7.3
4	7386.00	34.7 AV	54.0	-19.3	2.43 H	295	27.4	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.6 PK	74.0	-31.4	2.29 V	257	40.8	1.8
2	4924.00	31.1 AV	54.0	-22.9	2.29 V	257	29.3	1.8
3	7386.00	44.0 PK	74.0	-30.0	2.04 V	244	36.7	7.3
4	7386.00	33.3 AV	54.0	-20.7	2.04 V	244	26.0	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.1 PK	74.0	-33.9	1.82 H	276	38.2	1.9
2	4934.00	31.1 AV	54.0	-22.9	1.82 H	276	29.2	1.9
3	7401.00	47.7 PK	74.0	-26.3	2.41 H	301	40.3	7.4
4	7401.00	35.3 AV	54.0	-18.7	2.41 H	301	27.9	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.1 PK	74.0	-31.9	2.54 V	258	40.2	1.9
2	4934.00	30.5 AV	54.0	-23.5	2.54 V	258	28.6	1.9
3	7401.00	44.6 PK	74.0	-29.4	2.00 V	238	37.2	7.4
4	7401.00	33.9 AV	54.0	-20.1	2.00 V	238	26.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.3 PK	74.0	-33.7	1.78 H	292	38.4	1.9
2	4944.00	31.0 AV	54.0	-23.0	1.78 H	292	29.1	1.9
3	7416.00	47.3 PK	74.0	-26.7	2.42 H	287	39.9	7.4
4	7416.00	35.0 AV	54.0	-19.0	2.42 H	287	27.6	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.0 PK	74.0	-33.0	2.50 V	248	39.1	1.9
2	4944.00	29.5 AV	54.0	-24.5	2.50 V	248	27.6	1.9
3	7416.00	45.1 PK	74.0	-28.9	2.00 V	265	37.7	7.4
4	7416.00	34.1 AV	54.0	-19.9	2.00 V	265	26.7	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.0 PK	74.0	-34.0	1.81 H	296	38.3	1.7
2	4824.00	30.7 AV	54.0	-23.3	1.81 H	296	29.0	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.4 PK	74.0	-32.6	2.50 V	249	39.7	1.7
2	4824.00	29.9 AV	54.0	-24.1	2.50 V	249	28.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.0 PK	74.0	-34.0	1.82 H	287	38.3	1.7
2	4874.00	30.9 AV	54.0	-23.1	1.82 H	287	29.2	1.7
3	7311.00	46.5 PK	74.0	-27.5	2.45 H	285	39.7	6.8
4	7311.00	34.5 AV	54.0	-19.5	2.45 H	285	27.7	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.6 PK	74.0	-32.4	2.56 V	244	39.9	1.7
2	4874.00	30.1 AV	54.0	-23.9	2.56 V	244	28.4	1.7
3	7311.00	44.1 PK	74.0	-29.9	2.06 V	264	37.3	6.8
4	7311.00	33.4 AV	54.0	-20.6	2.06 V	264	26.6	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.2 PK	74.0	-33.8	1.78 H	266	38.4	1.8
2	4924.00	31.4 AV	54.0	-22.6	1.78 H	266	29.6	1.8
3	7386.00	46.3 PK	74.0	-27.7	2.45 H	283	39.0	7.3
4	7386.00	34.4 AV	54.0	-19.6	2.45 H	283	27.1	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.1 PK	74.0	-31.9	2.54 V	247	40.3	1.8
2	4924.00	30.4 AV	54.0	-23.6	2.54 V	247	28.6	1.8
3	7386.00	43.6 PK	74.0	-30.4	2.05 V	253	36.3	7.3
4	7386.00	33.0 AV	54.0	-21.0	2.05 V	253	25.7	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.7 PK	74.0	-33.3	1.80 H	289	38.8	1.9
2	4934.00	31.4 AV	54.0	-22.6	1.80 H	289	29.5	1.9
3	7401.00	46.4 PK	74.0	-27.6	2.39 H	312	39.0	7.4
4	7401.00	34.4 AV	54.0	-19.6	2.39 H	312	27.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.7 PK	74.0	-32.3	2.55 V	244	39.8	1.9
2	4934.00	29.9 AV	54.0	-24.1	2.55 V	244	28.0	1.9
3	7401.00	43.7 PK	74.0	-30.3	2.03 V	249	36.3	7.4
4	7401.00	33.1 AV	54.0	-20.9	2.03 V	249	25.7	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.5 PK	74.0	-33.5	1.79 H	290	38.6	1.9
2	4944.00	31.4 AV	54.0	-22.6	1.79 H	290	29.5	1.9
3	7416.00	46.4 PK	74.0	-27.6	2.47 H	282	39.0	7.4
4	7416.00	34.5 AV	54.0	-19.5	2.47 H	282	27.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.1 PK	74.0	-32.9	2.60 V	237	39.2	1.9
2	4944.00	29.7 AV	54.0	-24.3	2.60 V	237	27.8	1.9
3	7416.00	44.3 PK	74.0	-29.7	2.07 V	275	36.9	7.4
4	7416.00	33.7 AV	54.0	-20.3	2.07 V	275	26.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.3 PK	74.0	-33.7	1.80 H	294	38.6	1.7
2	4824.00	31.2 AV	54.0	-22.8	1.80 H	294	29.5	1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.7 PK	74.0	-32.3	2.51 V	244	40.0	1.7
2	4824.00	30.4 AV	54.0	-23.6	2.51 V	244	28.7	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.3 PK	74.0	-33.7	1.79 H	274	38.6	1.7
2	4874.00	30.9 AV	54.0	-23.1	1.79 H	274	29.2	1.7
3	7311.00	47.1 PK	74.0	-26.9	2.39 H	303	40.3	6.8
4	7311.00	34.8 AV	54.0	-19.2	2.39 H	303	28.0	6.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.1 PK	74.0	-32.9	2.50 V	241	39.4	1.7
2	4874.00	29.8 AV	54.0	-24.2	2.50 V	241	28.1	1.7
3	7311.00	44.4 PK	74.0	-29.6	2.05 V	250	37.6	6.8
4	7311.00	33.7 AV	54.0	-20.3	2.05 V	250	26.9	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.4 PK	74.0	-33.6	1.74 H	296	38.6	1.8
2	4924.00	31.0 AV	54.0	-23.0	1.74 H	296	29.2	1.8
3	7386.00	47.6 PK	74.0	-26.4	2.42 H	289	40.3	7.3
4	7386.00	35.3 AV	54.0	-18.7	2.42 H	289	28.0	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.4 PK	74.0	-31.6	2.59 V	258	40.6	1.8
2	4924.00	30.6 AV	54.0	-23.4	2.59 V	258	28.8	1.8
3	7386.00	44.1 PK	74.0	-29.9	2.03 V	276	36.8	7.3
4	7386.00	33.6 AV	54.0	-20.4	2.03 V	276	26.3	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.3 PK	74.0	-33.7	1.75 H	294	38.4	1.9
2	4934.00	31.0 AV	54.0	-23.0	1.75 H	294	29.1	1.9
3	7401.00	46.5 PK	74.0	-27.5	2.42 H	299	39.1	7.4
4	7401.00	34.6 AV	54.0	-19.4	2.42 H	299	27.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.3 PK	74.0	-32.7	2.57 V	235	39.4	1.9
2	4934.00	29.7 AV	54.0	-24.3	2.57 V	235	27.8	1.9
3	7401.00	43.6 PK	74.0	-30.4	2.01 V	262	36.2	7.4
4	7401.00	33.0 AV	54.0	-21.0	2.01 V	262	25.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.4 PK	74.0	-33.6	1.81 H	277	38.5	1.9
2	4944.00	31.4 AV	54.0	-22.6	1.81 H	277	29.5	1.9
3	7416.00	46.6 PK	74.0	-27.4	2.38 H	288	39.2	7.4
4	7416.00	34.7 AV	54.0	-19.3	2.38 H	288	27.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.7 PK	74.0	-32.3	2.53 V	242	39.8	1.9
2	4944.00	30.1 AV	54.0	-23.9	2.53 V	242	28.2	1.9
3	7416.00	43.9 PK	74.0	-30.1	2.12 V	276	36.5	7.4
4	7416.00	33.1 AV	54.0	-20.9	2.12 V	276	25.7	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---