

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
Report No.: RFBARR-WTW-P24120359-6
FCC ID: RAS-MT7925B14LA
Product: 2TX 11be (WiFi7) BW160 + BT/BLE Combo Card
Brand: MediaTek
Model No.: MT7925B14LA
Received Date: 2024/12/11
Test Date: 2024/12/19 ~ 2025/3/25
Issued Date: 2025/4/10
Applicant: MediaTek Inc.
Address: No. 1, Dusing 1st Rd., Hsinchu Science Park, Hsinchu City, 30078 Taiwan
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory
Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
FCC Registration / 723255 / TW2022
Designation Number:

Approved by: _____, **Date:** 2025/4/10
May Chen / Manager

This test report consists of 325 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Claire Kuan / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	8
3.3 Channel List.....	10
3.4 Test Mode Applicability and Tested Channel Detail.....	11
3.5 Duty Cycle of Test Signal.....	16
3.6 Test Program Used and Operation Descriptions	26
3.7 Connection Diagram of EUT and Peripheral Devices	26
3.8 Configuration of Peripheral Devices and Cable Connections	27
4 Test Instruments	28
4.1 RF Output Power.....	28
4.2 Power Spectral Density	28
4.3 6 dB Bandwidth	28
4.4 AC Power Conducted Emissions	28
4.5 Unwanted Emissions below 1 GHz	29
4.6 Unwanted Emissions above 1 GHz.....	30
5 Limits of Test Items.....	31
5.1 RF Output Power.....	31
5.2 Power Spectral Density	31
5.3 6 dB Bandwidth	31
5.4 AC Power Conducted Emissions	31
5.5 Unwanted Emissions below 1 GHz	32
5.6 Unwanted Emissions above 1 GHz.....	32
6 Test Arrangements.....	33
6.1 RF Output Power.....	33
6.1.1 Test Setup	33
6.1.2 Test Procedure.....	33
6.2 Power Spectral Density	33
6.2.1 Test Setup	33
6.2.2 Test Procedure.....	33
6.3 6 dB Bandwidth	34
6.3.1 Test Setup	34
6.3.2 Test Procedure.....	34
6.4 AC Power Conducted Emissions	34
6.4.1 Test Setup	34
6.4.2 Test Procedure.....	34
6.5 Unwanted Emissions below 1 GHz	35
6.5.1 Test Setup	35
6.5.2 Test Procedure.....	36
6.6 Unwanted Emissions above 1 GHz.....	38
6.6.1 Test Setup	38
6.6.2 Test Procedure.....	38
7 Test Results of Test Item.....	40
7.1 RF Output Power.....	40
7.2 Power Spectral Density	50
7.3 6 dB Bandwidth	63
7.4 AC Power Conducted Emissions	73
7.5 Unwanted Emissions below 1 GHz	77

7.6	Unwanted Emissions above 1 GHz.....	83
8	Pictures of Test Arrangements	324
9	Information of the Testing Laboratories	325

Release Control Record

Issue No.	Description	Date Issued
RFBARR-WTW-P24120359-6	Original release.	2025/4/10

1 Certificate

Product: 2TX 11be (WiFi7) BW160 + BT/BLE Combo Card

Brand: MediaTek

Test Model: MT7925B14LA

Sample Status: Engineering sample

Applicant: MediaTek Inc.

Test Date: 2024/12/19 ~ 2025/3/25

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement ANSI C63.10-2013

procedure: KDB 291074 D02 EMC Measurement v01

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -9.04 dB at 0.15000 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -1.6 dB at 695.89 MHz
15.407(b)(5) 15.407(b)(10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.51 dB at 5895 MHz
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.1 dB
Power Spectral Density	-	1.3 dB
6 dB Bandwidth	-	1050.00 Hz
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.5 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.1 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	2TX 11be (WiFi7) BW160 + BT/BLE Combo Card
Brand	MediaTek
Test Model	MT7925B14LA
Status of EUT	Engineering sample
Power Supply Rating	3.3 Vdc from host equipment
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode 1024QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2401.9 Mbps 802.11be: up to 2882.4 Mbps
Operating Frequency	5.815 GHz ~ 5.885 GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20): 3 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40): 2 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80): 1 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160): 1
Resource Unit (RU)	Single RU: 26-tone, 52-tone, 106-tone, 242-tone, 484-tone, 996-tone, 2 * 996-tone Multi-RU (Small RU): 52-tone + 26-tone, 106-tone + 26-tone Multi-RU (Large RU): 484-tone + 242-tone, 996-tone + 484-tone, 996-tone + 484-tone + 242-tone
Output Power	1TX: EIRP: 885.116 mW (29.47 dBm) 2TX: EIRP: 868.503 mW (29.39 dBm)
EUT Category	Client device

Note:

1. There are Bluetooth and WLAN (2.4 GHz & 5 GHz & 5.9 GHz & 6 GHz) technology used for the EUT.
2. Simultaneously transmission combination.

Combination	Technology	
1	WLAN (5 GHz) (2TX)	Bluetooth
2	WLAN (5.9 GHz) (2TX)	Bluetooth
3	WLAN (6 GHz) (2TX)	Bluetooth
4	WLAN (2.4 GHz) (1TX)	WLAN (5 GHz) (1TX)
5	WLAN (2.4 GHz) (1TX)	WLAN (5.9 GHz) (1TX)
6	WLAN (2.4 GHz) (1TX)	WLAN (6 GHz) (1TX)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified.
4. The EUT support MRU mode is listed as below.

BW	Small size		Large size		
	52+26-tone MRU	106+26-tone MRU	484+242-tone MRU	996+484-tone MRU	996+484+242-tone MRU
20 MHz	v	v	-	-	-
40 MHz	v	v	-	-	-
80 MHz	v	v	v	-	-
160 MHz	v	v	v	v	v

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Set	RF Chain NO.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1	Chain0	PSA	RFMTA311020EMMB301	1.71 4.82 4.76 4.29 4.61 4.09	2.4 ~ 2.4835 5.15 ~ 5.895 5.925 ~ 6.425 6.425 ~ 6.525 6.525 ~ 6.875 6.875 ~ 7.125	PIFA	i-pex(MHF)	200
	Chain1	PSA	RFMTA311020EMMB301	1.71 4.82 4.76 4.29 4.61 4.09	2.4 ~ 2.4835 5.15 ~ 5.895 5.925 ~ 6.425 6.425 ~ 6.525 6.525 ~ 6.875 6.875 ~ 7.125	PIFA	i-pex(MHF)	200
2	Chain0	INPAQ	RFFPA493517EMAB901	6.19	2.4 ~ 2.4835	PIFA	i-pex(MHF)	125
	Chain1	INPAQ	RFFPA493517EMAB901	6.19	2.4 ~ 2.4835	PIFA	i-pex(MHF)	125
3	Chain0	INPAQ	RFFPA494517EM5B901	8.37	5.15 ~ 5.925	PIFA	i-pex(MHF)	125
	Chain1	INPAQ	RFFPA494517EM5B901	8.37	5.15 ~ 5.925	PIFA	i-pex(MHF)	125
4	Chain0	INPAQ	RFFPA494217EM6B901	8.37	5.925 ~ 7.125	PIFA	i-pex(MHF)	125
	Chain1	INPAQ	RFFPA494217EM6B901	8.37	5.925 ~ 7.125	PIFA	i-pex(MHF)	125
5	Chain0	PSA	RFMTA421230IMMB701	-13.92 -13.91 -13.91 -14.46	5.925 ~ 6.425 6.425 ~ 6.525 6.525 ~ 6.875 6.875 ~ 7.125	PIFA	i-pex(MHF)	300
	Chain1	PSA	RFMTA421230IMMB701	-13.92 -13.91 -13.91 -14.46	5.925 ~ 6.425 6.425 ~ 6.525 6.525 ~ 6.875 6.875 ~ 7.125	PIFA	i-pex(MHF)	300

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

5 GHz Band					
Modulation Mode	TX & RX Configuration			CDD Mode	Beamforming Mode
802.11a	SIMO	1TX (Diversity)	2RX	-	-
802.11n (HT20)		1TX (Diversity)	2RX	-	-
802.11n (HT40)		1TX (Diversity)	2RX	-	-
802.11ac (VHT20)		1TX (Diversity)	2RX	-	-
802.11ac (VHT40)		1TX (Diversity)	2RX	-	-
802.11ac (VHT80)		1TX (Diversity)	2RX	-	-
802.11ac (VHT160)		1TX (Diversity)	2RX	-	-
802.11ax (HE20)		1TX (Diversity)	2RX	-	-
802.11ax (HE40)		1TX (Diversity)	2RX	-	-
802.11ax (HE80)		1TX (Diversity)	2RX	-	-
802.11ax (HE160)		1TX (Diversity)	2RX	-	-
802.11be (EHT20)		1TX (Diversity)	2RX	-	-
802.11be (EHT40)		1TX (Diversity)	2RX	-	-
802.11be (EHT80)		1TX (Diversity)	2RX	-	-
802.11be (EHT160)		1TX (Diversity)	2RX	-	-
802.11ax (RU26/52/106/242/484/996/2*996)		1TX (Diversity)	2RX	-	-
802.11be (RU26/52/106/242/484/996/2*996 MRU52+26/106+26/484+242/ 996+484/996+484+242)		1TX (Diversity)	2RX	-	-
802.11a	MIMO	2TX	2RX	Support	Not Support
802.11n (HT20)		2TX	2RX	Support NSS2	Not Support
802.11n (HT40)		2TX	2RX	Support NSS2	Not Support
802.11ac (VHT20)		2TX	2RX	Support NSS2	Not Support
802.11ac (VHT40)		2TX	2RX	Support NSS2	Not Support
802.11ac (VHT80)		2TX	2RX	Support NSS2	Not Support
802.11ac (VHT160)		2TX	2RX	Support NSS2	Not Support
802.11ax (HE20)		2TX	2RX	Support NSS2	Not Support
802.11ax (HE40)		2TX	2RX	Support NSS2	Not Support
802.11ax (HE80)		2TX	2RX	Support NSS2	Not Support
802.11ax (HE160)		2TX	2RX	Support NSS2	Not Support
802.11be (EHT20)		2TX	2RX	Support NSS2	Not Support
802.11be (EHT40)		2TX	2RX	Support NSS2	Not Support
802.11be (EHT80)		2TX	2RX	Support NSS2	Not Support
802.11be (EHT160)		2TX	2RX	Support NSS2	Not Support
802.11ax (RU26/52/106/242/484/996/2*996)		2TX	2RX	Support NSS2	Not Support
802.11be (RU26/52/106/242/484/996/2*996 MRU52+26/106+26/484+242/ 996+484/996+484+242)		2TX	2RX	Support NSS2	Not Support

Note: The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ac mode for 20 MHz (40 MHz, 80 MHz, 160 MHz), 802.11ax mode for 20 MHz (40 MHz, 80 MHz, 160 MHz) and 802.11be mode for 20 MHz (40 MHz, 80 MHz, 160 MHz). Therefore the investigated worst case is the representative mode in test report.

3.3 Channel List

3 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
*169	5845 MHz	173	5865 MHz	177	5885 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
*167	5835 MHz	175	5875 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency
*171	5855 MHz

1 channel is provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
*163	5815 MHz

Note: * U-NII-3 & -4 span channels.

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
	2. The worst-case Partial RU modes across all supported bandwidth modes has been determined via pre-scan. The worst case occurs in 20 MHz bandwidth (RU 26/52/106).
	3. For 1TX diversity configuration, transmit chain0 and chain 1 have been evaluated, the chain 0 was the worst case and chosen for representative test.

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index (for MTK)
RF Output Power	A	802.11a	1T / 2T	169, 173, 177	BPSK	6Mb/s	NA
		802.11ac (VHT20)	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	NA
		802.11ac (VHT40)	1S1T / 2S2T	167, 175	BPSK	MCS0	NA
		802.11ac (VHT80)	1S1T / 2S2T	171	BPSK	MCS0	NA
		802.11ac (VHT160)	1S1T / 2S2T	163	BPSK	MCS0	NA
		802.11ax (HE20)	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	NA
		802.11ax (HE40)	1S1T / 2S2T	167, 175	BPSK	MCS0	NA
		802.11ax (HE80)	1S1T / 2S2T	171	BPSK	MCS0	NA
		802.11ax (HE160)	1S1T / 2S2T	163	BPSK	MCS0	NA
		802.11be (EHT20)	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	NA
		802.11be (EHT40)	1S1T / 2S2T	167, 175	BPSK	MCS0	NA
		802.11be (EHT80)	1S1T / 2S2T	171	BPSK	MCS0	NA
		802.11be (EHT160)	1S1T / 2S2T	163	BPSK	MCS0	NA
		802.11ax (HE20) 26-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	0, 0, 8
		802.11ax (HE20) 52-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	37, 37, 40
		802.11ax (HE20) 106-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	53, 53, 54

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index (for MTK)
RF Output Power	A	802.11be (EHT20) 26- tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	0, 0, 8
		802.11be (EHT20) 52- tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	37, 37, 40
		802.11be (EHT20) 106- tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	53, 53, 54
		802.11be (EHT20) 52+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	70, 70, 72
		802.11be (EHT20) 106+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	82, 82, 83
		802.11be (EHT80) 484+242-tone MRU	1S1T / 2S2T	171	BPSK	MCS0	90
		802.11be (EHT160) 996+484-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	95-1
		802.11be (EHT160) 996+484+242- tone MRU	1S1T / 2S2T	163	BPSK	MCS0	99-1

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index (for MTK)
Power Spectral Density	A	802.11a	1T / 2T	169, 173, 177	BPSK	6Mb/s	NA
		802.11be (EHT20)	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	NA
		802.11be (EHT40)	1S1T / 2S2T	167, 175	BPSK	MCS0	NA
		802.11be (EHT80)	1S1T / 2S2T	171	BPSK	MCS0	NA
		802.11be (EHT160)	1S1T / 2S2T	163	BPSK	MCS0	NA
		802.11be (EHT20) 26- tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	0, 0, 8
		802.11be (EHT20) 52- tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	37, 37, 40
		802.11be (EHT20) 106- tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	53, 53, 54
		802.11be (EHT20) 52+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	70, 70, 72
		802.11be (EHT20) 106+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	82, 82, 83
		802.11be (EHT80) 484+242-tone MRU	1S1T / 2S2T	171	BPSK	MCS0	90
		802.11be (EHT160) 996+484-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	95-1
		802.11be (EHT160) 996+484+242- tone MRU	1S1T / 2S2T	163	BPSK	MCS0	99-1

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index (for MTK)
6 dB Bandwidth	A	802.11a	1T / 2T	169, 173, 177	BPSK	6Mb/s	NA
		802.11be (EHT20)	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	NA
		802.11be (EHT40)	1S1T / 2S2T	167, 175	BPSK	MCS0	NA
		802.11be (EHT80)	1S1T / 2S2T	171	BPSK	MCS0	NA
		802.11be (EHT160)	1S1T / 2S2T	163	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	0, 0, 8
		802.11be (EHT20) 52-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	37, 37, 40
		802.11be (EHT20) 106-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	53, 53, 54
		802.11be (EHT20) 52+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	70, 70, 72
		802.11be (EHT20) 106+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	82, 82, 83
		802.11be (EHT80) 484+242-tone MRU	1S1T / 2S2T	171	BPSK	MCS0	90
		802.11be (EHT160) 996+484-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	95-1
		802.11be (EHT160) 996+484+242-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	99-1
AC Power Conducted Emissions	C	802.11be (EHT80)	1S1T	171	BPSK	MCS0	NA
			2S2T	171	BPSK	MCS0	NA
Unwanted Emissions below 1 GHz	A, B	802.11be (EHT80)	1S1T	171	BPSK	MCS0	NA
			2S2T	171	BPSK	MCS0	NA

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index (for MTK)
Unwanted Emissions above 1 GHz	A, B	802.11a	1T / 2T	169, 173, 177	BPSK	6Mb/s	NA
		802.11be (EHT20)	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	NA
		802.11be (EHT40)	1S1T / 2S2T	167, 175	BPSK	MCS0	NA
		802.11be (EHT80)	1S1T / 2S2T	171	BPSK	MCS0	NA
		802.11be (EHT160)	1S1T / 2S2T	163	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	0, 0, 8
		802.11be (EHT20) 52-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	37, 37, 40
		802.11be (EHT20) 106-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	53, 53, 54
		802.11be (EHT20) 52+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	70, 70, 72
		802.11be (EHT20) 106+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	82, 82, 83
		802.11be (EHT80) 484+242-tone MRU	1S1T / 2S2T	171	BPSK	MCS0	90
		802.11be (EHT160) 996+484-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	95-1
		802.11be (EHT160) 996+484+242-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	99-1
		EUT Configure Mode:	A	EUT only (remove 50 ohm terminator and Connect to the appropriate equipment)			
B	EUT with 50 ohm terminator						
C	EUT with antenna						
Note: Channel puncturing mechanism is not supported.							

3.5 Duty Cycle of Test Signal

1TX

802.11a 1T: Duty cycle = 1.999 ms / 3.253 ms x 100% = 61.5%, duty factor = $10 * \log (1/\text{Duty cycle}) = 2.11$ dB

802.11ac (VHT20) 1S1T: Duty cycle = 4.637 ms / 5.872 ms x 100% = 79.0%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.03$ dB

802.11ac (VHT40) 1S1T: Duty cycle = 4.631 ms / 5.866 ms x 100% = 78.9%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.03$ dB

802.11ac (VHT80) 1S1T: Duty cycle = 2.249 ms / 2.882 ms x 100% = 78.0%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.08$ dB

802.11ac (VHT160) 1S1T: Duty cycle = 2.056 ms / 2.532 ms x 100% = 81.2%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.90$ dB

802.11ax (HE20) 1S1T: Duty cycle = 4.637 ms / 5.872 ms x 100% = 79.0%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.03$ dB

802.11ax (HE40) 1S1T: Duty cycle = 4.631 ms / 5.866 ms x 100% = 78.9%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.03$ dB

802.11ax (HE80) 1S1T: Duty cycle = 2.249 ms / 2.882 ms x 100% = 78.0%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.08$ dB

802.11ax (HE160) 1S1T: Duty cycle = 2.056 ms / 2.532 ms x 100% = 81.2%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.90$ dB

802.11be (EHT20) 1S1T: Duty cycle = 4.637 ms / 5.872 ms x 100% = 79.0%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.03$ dB

802.11be (EHT40) 1S1T: Duty cycle = 4.631 ms / 5.866 ms x 100% = 78.9%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.03$ dB

802.11be (EHT80) 1S1T: Duty cycle = 2.249 ms / 2.882 ms x 100% = 78.0%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.08$ dB

802.11be (EHT160) 1S1T: Duty cycle = 2.056 ms / 2.532 ms x 100% = 81.2%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.90$ dB

802.11be (EHT20) 26-tone RU 1S1T: Duty cycle = 1.603 ms / 1.661 ms x 100% = 96.5%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.15$ dB

802.11be (EHT20) 52-tone RU 1S1T: Duty cycle = 1.521 ms / 1.6 ms x 100% = 95.1%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.22$ dB

802.11be (EHT20) 106-tone RU 1S1T: Duty cycle = 1.395 ms / 1.449 ms x 100% = 96.3%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.16$ dB







802.11be (EHT20) 52+26-tone MRU 1S1T: Duty cycle = 1.491 ms / 1.563 ms x 100% = 95.4%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.20$ dB






802.11be (EHT20) 106+26-tone MRU 1S1T: Duty cycle = 1.66 ms / 1.732 ms x 100% = 95.8%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.18$ dB







802.11be (EHT80) 484+242-tone MRU 1S1T: Duty cycle = 1.195 ms / 1.265 ms x 100% = 94.5%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.25$ dB




802.11be (EHT160) 996+484-tone MRU 1S1T: Duty cycle = 1.156 ms / 1.215 ms x 100% = 95.1%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.22$ dB

802.11be (EHT160) 996+484+242-tone MRU 1S1T: Duty cycle = 1.165 ms / 1.219 ms x 100% = 95.6%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.20$ dB

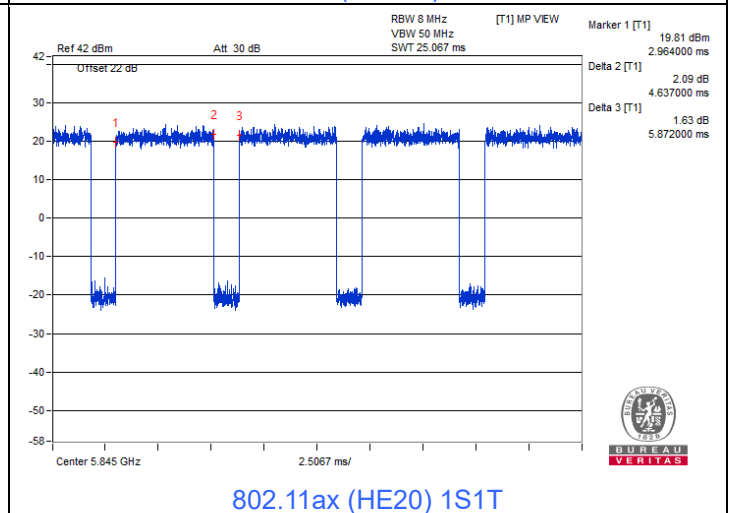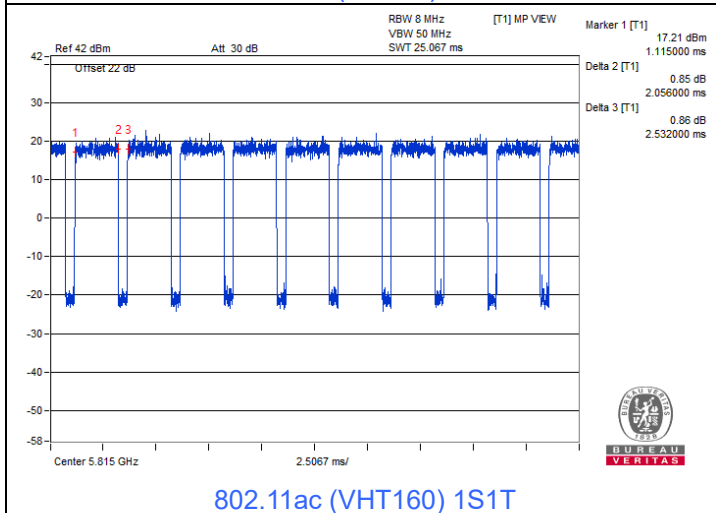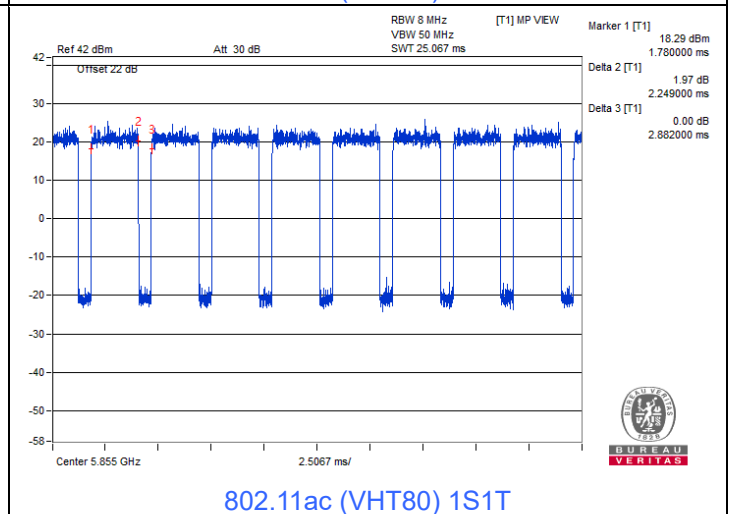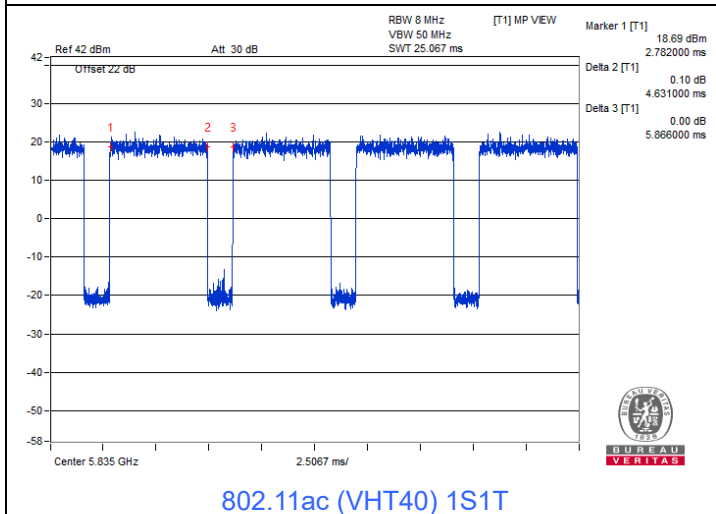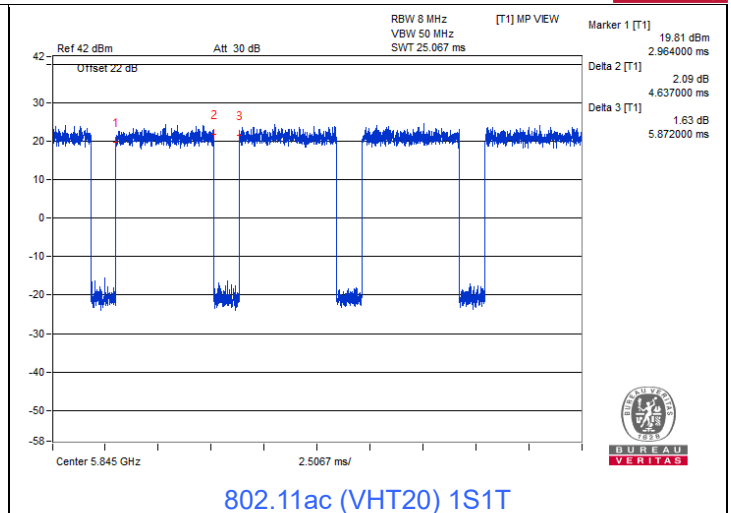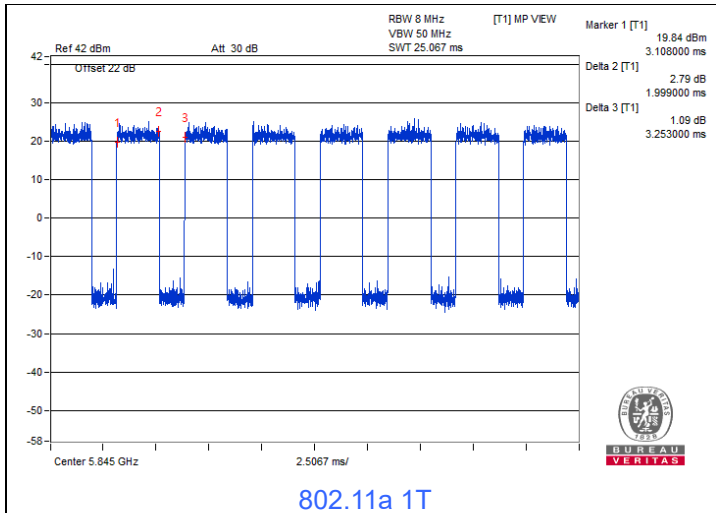

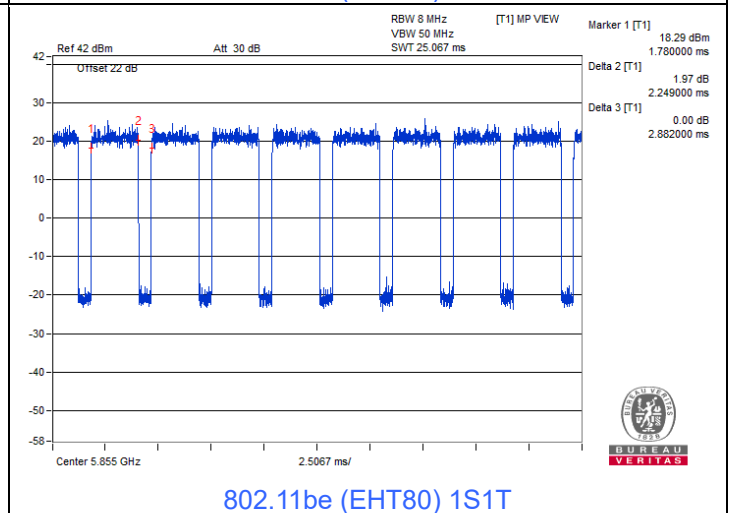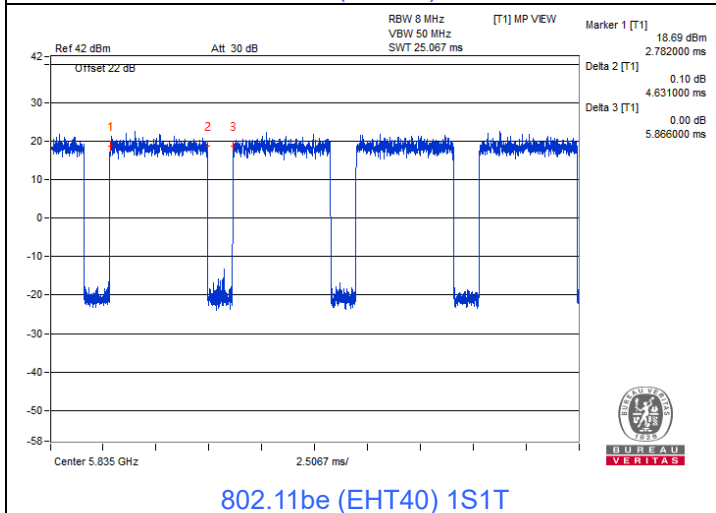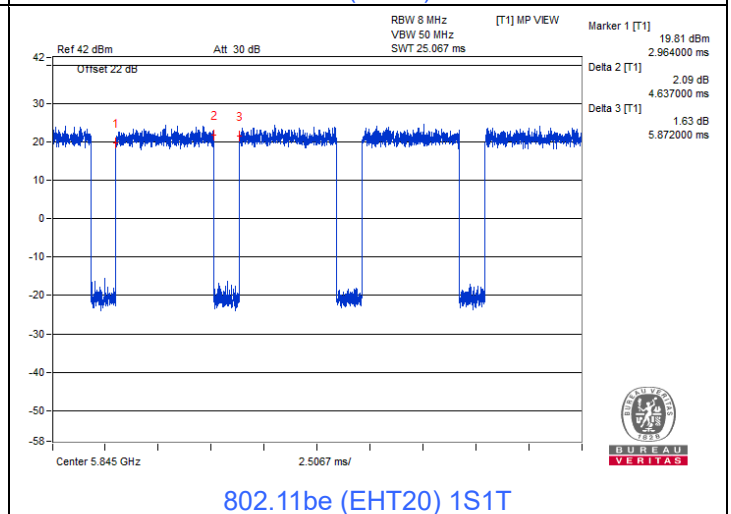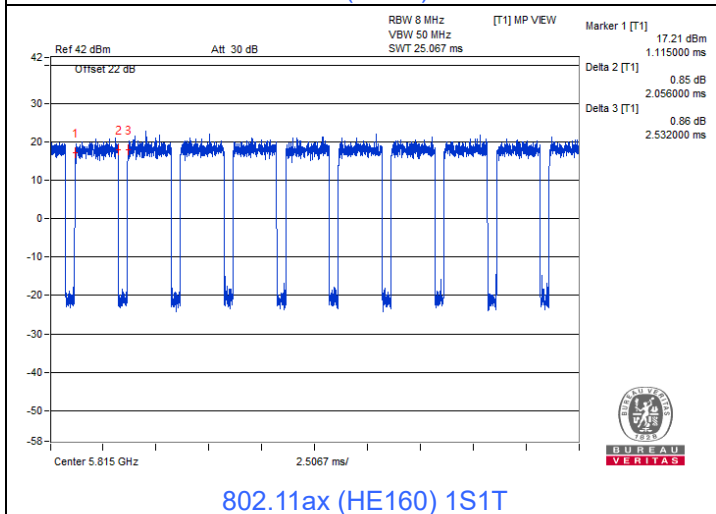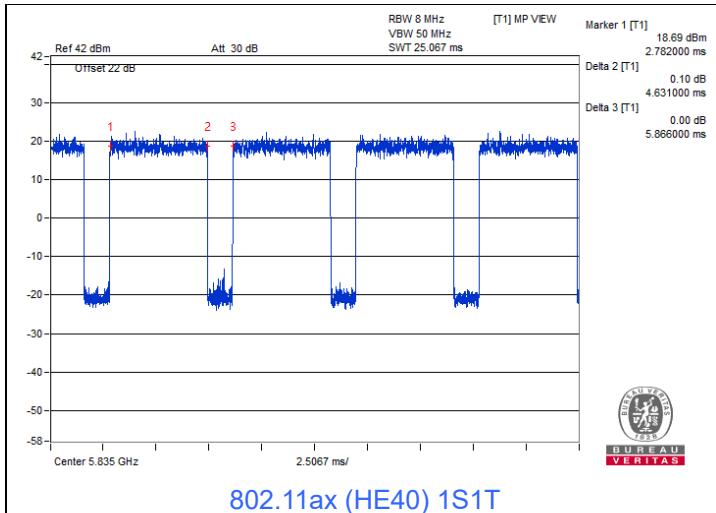

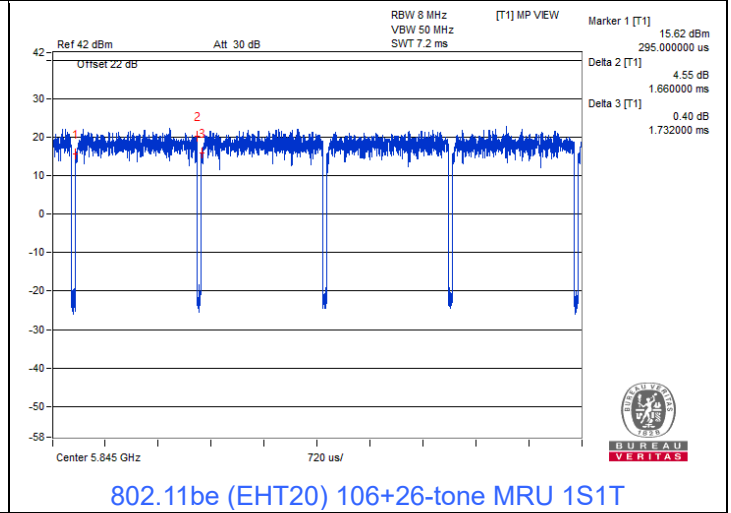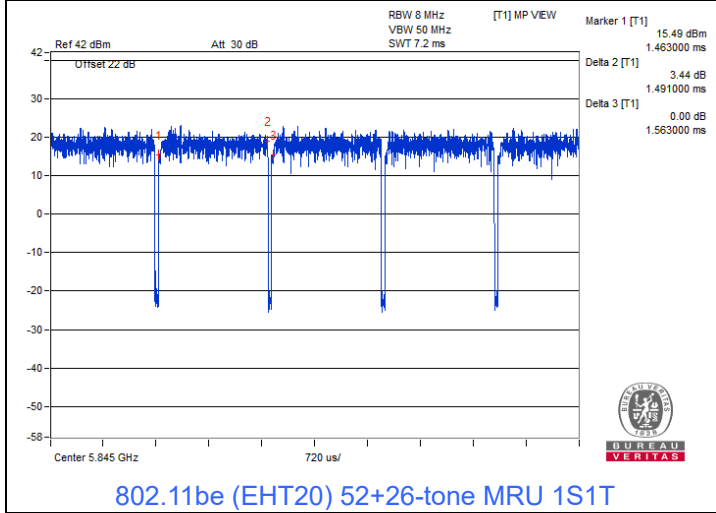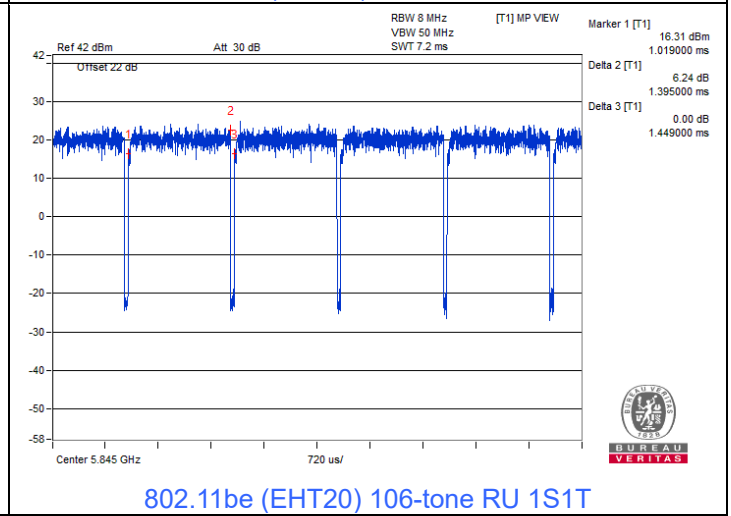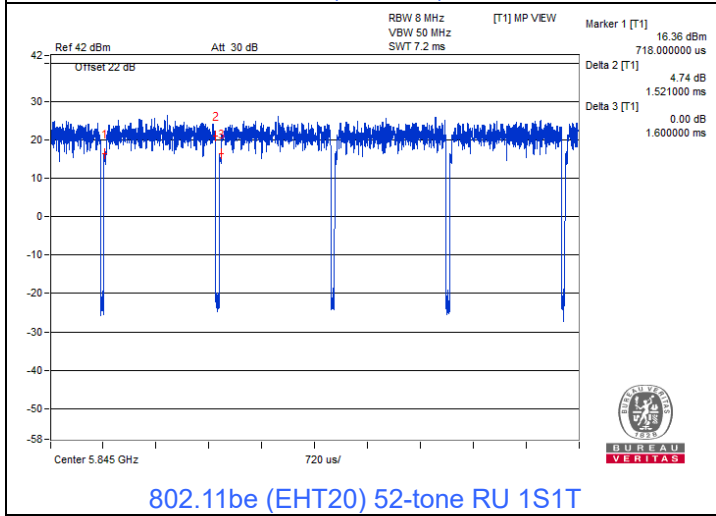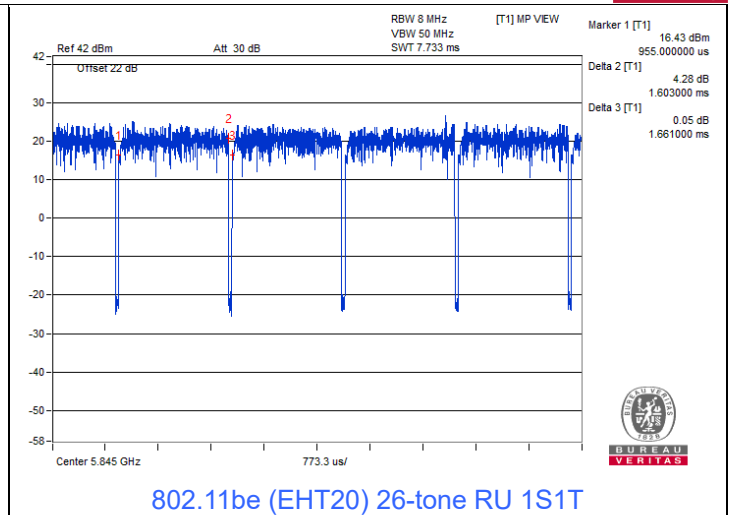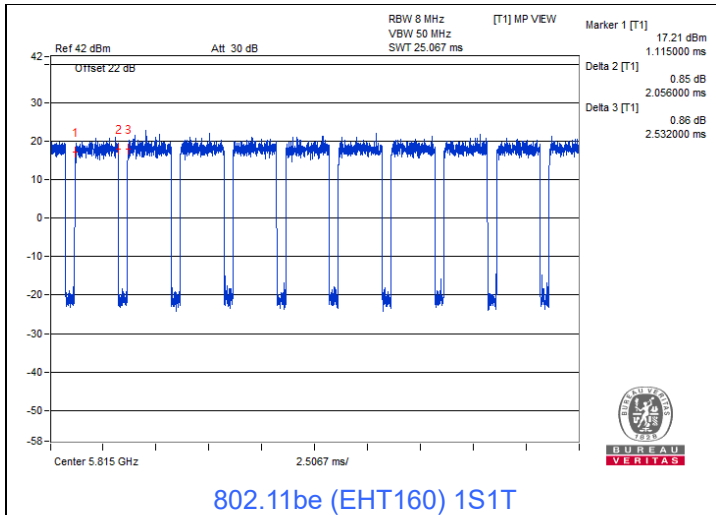

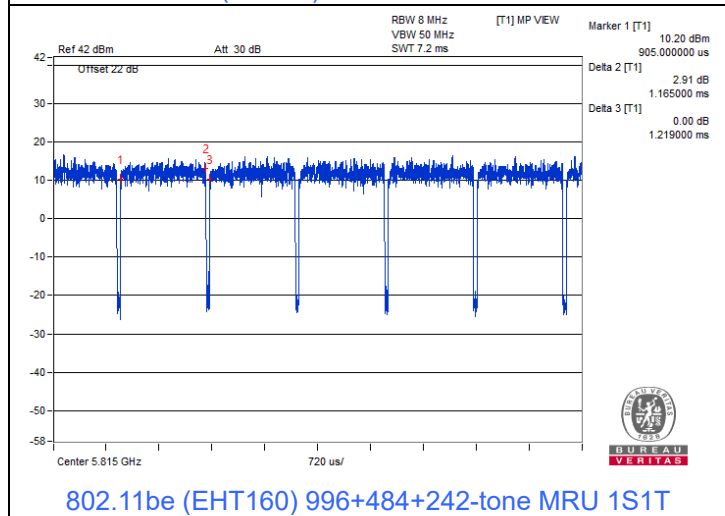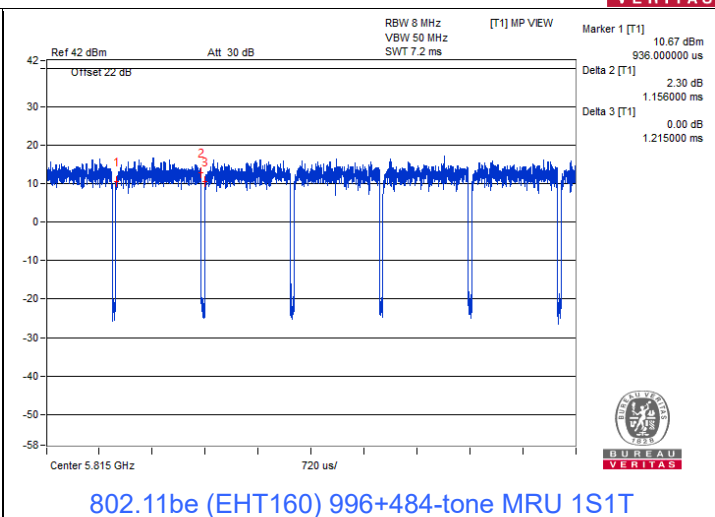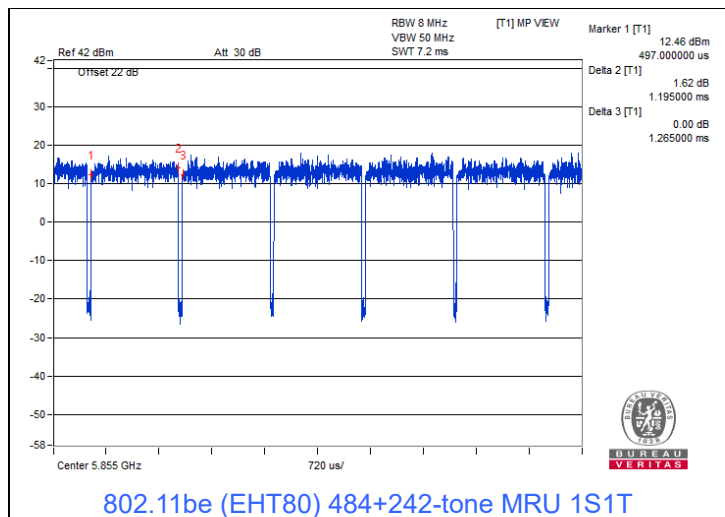

2TX

802.11a 2T: Duty cycle = $1.999 \text{ ms} / 3.228 \text{ ms} \times 100\% = 61.9\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 2.08 \text{ dB}$

802.11ac (VHT20) 2S2T: Duty cycle = $2.362 \text{ ms} / 3.584 \text{ ms} \times 100\% = 65.9\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.81 \text{ dB}$

802.11ac (VHT40) 2S2T: Duty cycle = $2.35 \text{ ms} / 3.585 \text{ ms} \times 100\% = 65.6\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.83 \text{ dB}$

802.11ac (VHT80) 2S2T: Duty cycle = $1.17 \text{ ms} / 1.805 \text{ ms} \times 100\% = 64.8\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.88 \text{ dB}$

802.11ac (VHT160) 2S2T: Duty cycle = $1.075 \text{ ms} / 1.524 \text{ ms} \times 100\% = 70.5\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.52 \text{ dB}$

802.11ax (HE20) 2S2T: Duty cycle = $2.362 \text{ ms} / 3.584 \text{ ms} \times 100\% = 65.9\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.81 \text{ dB}$

802.11ax (HE40) 2S2T: Duty cycle = $2.35 \text{ ms} / 3.585 \text{ ms} \times 100\% = 65.6\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.83 \text{ dB}$

802.11ax (HE80) 2S2T: Duty cycle = $1.17 \text{ ms} / 1.805 \text{ ms} \times 100\% = 64.8\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.88 \text{ dB}$

802.11ax (HE160) 2S2T: Duty cycle = $1.075 \text{ ms} / 1.524 \text{ ms} \times 100\% = 70.5\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.52 \text{ dB}$

802.11be (EHT20) 2S2T: Duty cycle = $2.362 \text{ ms} / 3.584 \text{ ms} \times 100\% = 65.9\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.81 \text{ dB}$

802.11be (EHT40) 2S2T: Duty cycle = $2.35 \text{ ms} / 3.585 \text{ ms} \times 100\% = 65.6\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.83 \text{ dB}$

802.11be (EHT80) 2S2T: Duty cycle = $1.17 \text{ ms} / 1.805 \text{ ms} \times 100\% = 64.8\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.88 \text{ dB}$

802.11be (EHT160) 2S2T: Duty cycle = $1.075 \text{ ms} / 1.524 \text{ ms} \times 100\% = 70.5\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.52 \text{ dB}$

802.11be (EHT20) 26-tone RU 2S2T: Duty cycle = $0.849 \text{ ms} / 0.905 \text{ ms} \times 100\% = 93.8\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.28 \text{ dB}$

802.11be (EHT20) 52-tone RU 2S2T: Duty cycle = $0.811 \text{ ms} / 0.881 \text{ ms} \times 100\% = 92.1\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.36 \text{ dB}$

802.11be (EHT20) 106-tone RU 2S2T: Duty cycle = $0.746 \text{ ms} / 0.805 \text{ ms} \times 100\% = 92.7\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.33 \text{ dB}$





802.11be (EHT20) 52+26-tone MRU 2S2T: Duty cycle = $0.803 \text{ ms} / 0.866 \text{ ms} \times 100\% = 92.7\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.33 \text{ dB}$







802.11be (EHT20) 106+26-tone MRU 2S2T: Duty cycle = $0.882 \text{ ms} / 0.954 \text{ ms} \times 100\% = 92.5\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.34 \text{ dB}$







802.11be (EHT80) 484+242-tone MRU 2S2T: Duty cycle = $0.649 \text{ ms} / 0.706 \text{ ms} \times 100\% = 91.9\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.37 \text{ dB}$

802.11be (EHT160) 996+484-tone MRU 2S2T: Duty cycle = $0.634 \text{ ms} / 0.687 \text{ ms} \times 100\% = 92.3\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.35 \text{ dB}$

802.11be (EHT160) 996+484+242-tone MRU 2S2T: Duty cycle = $0.635 \text{ ms} / 0.69 \text{ ms} \times 100\% = 92.0\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.36 \text{ dB}$

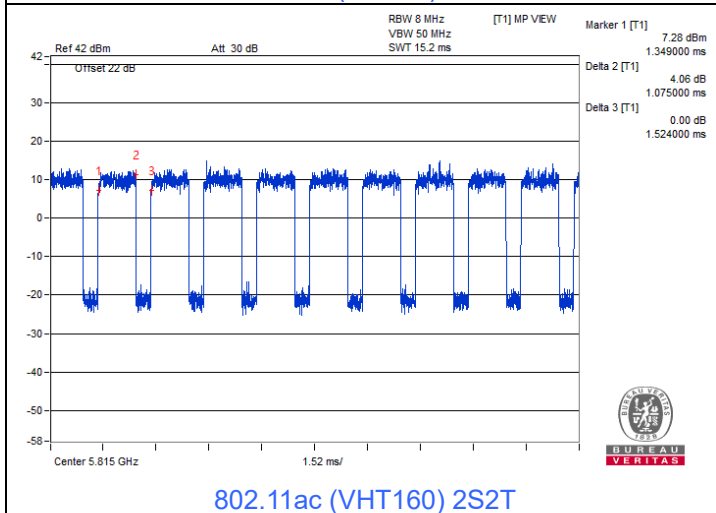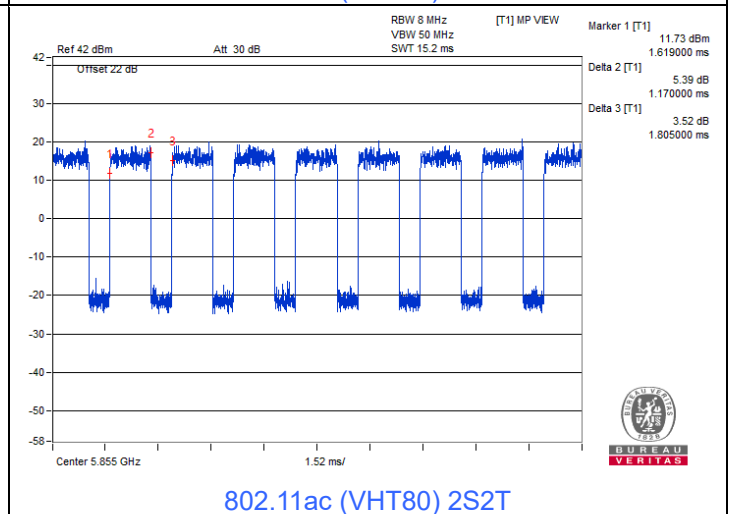
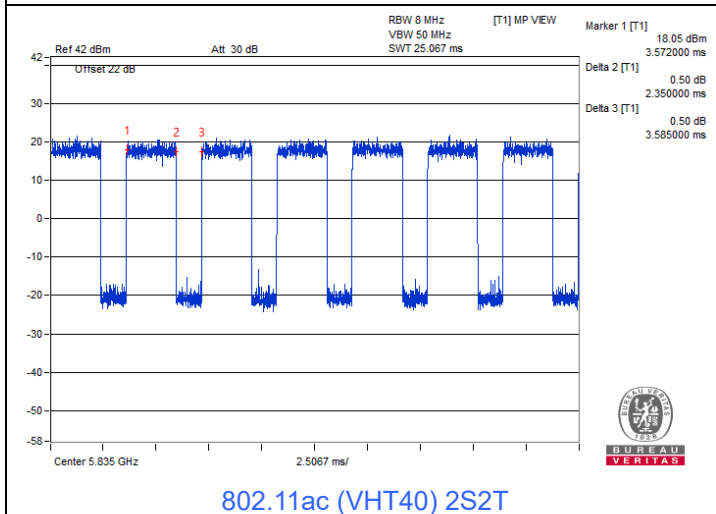
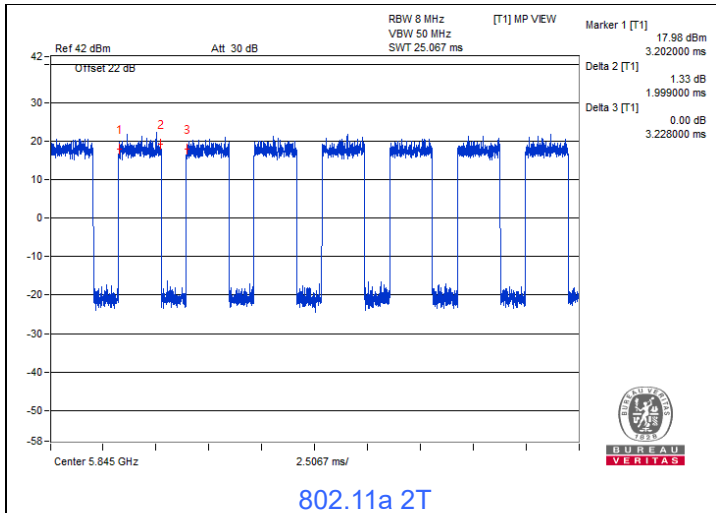


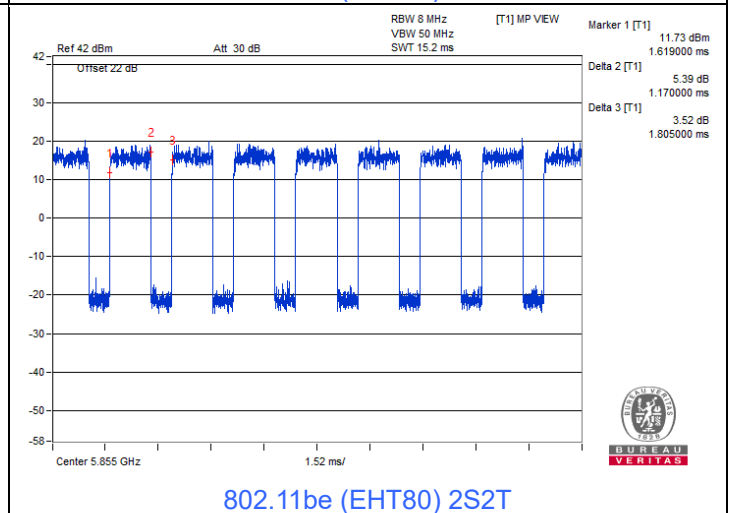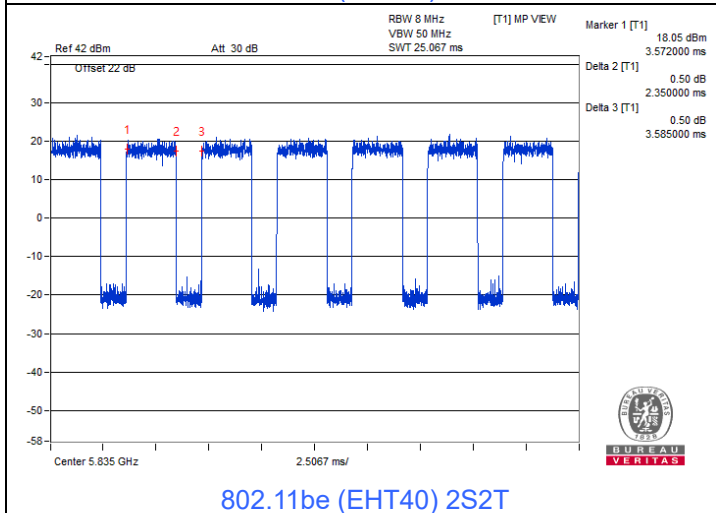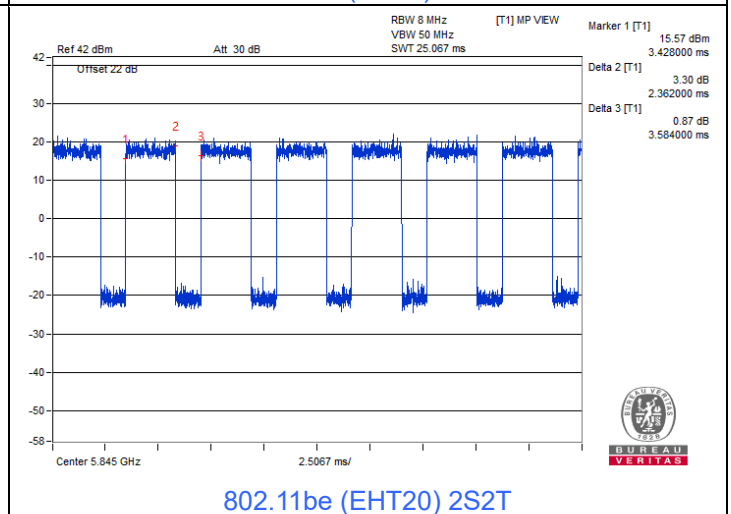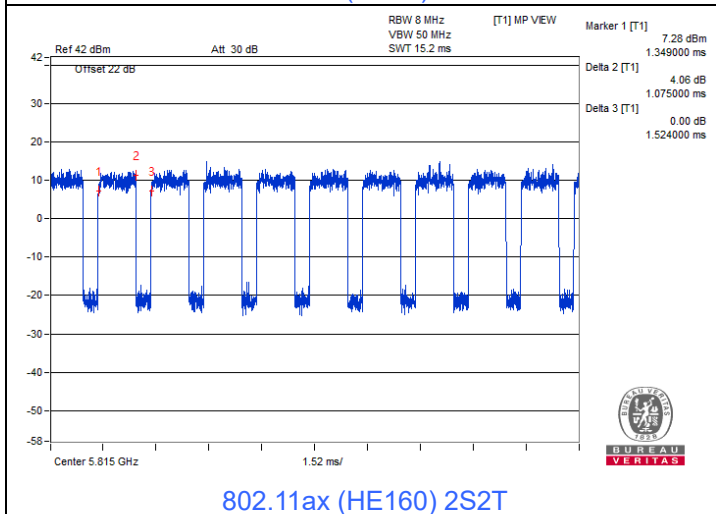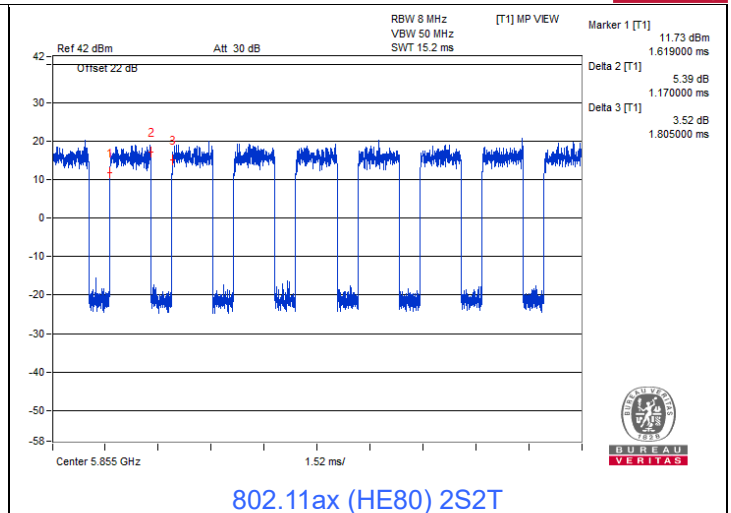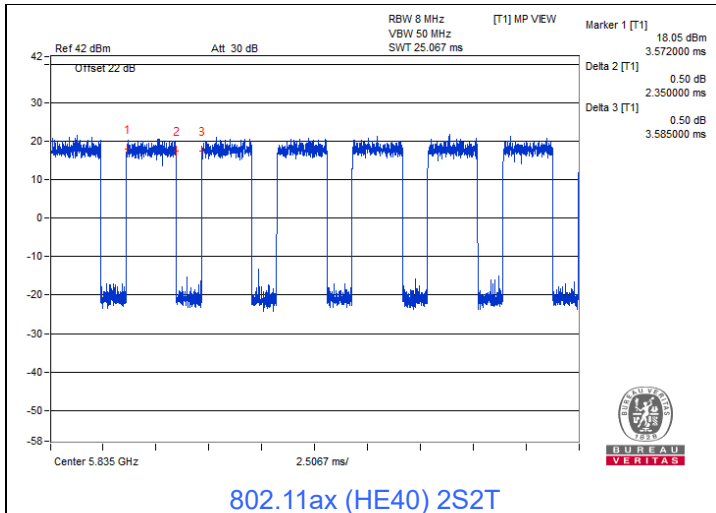

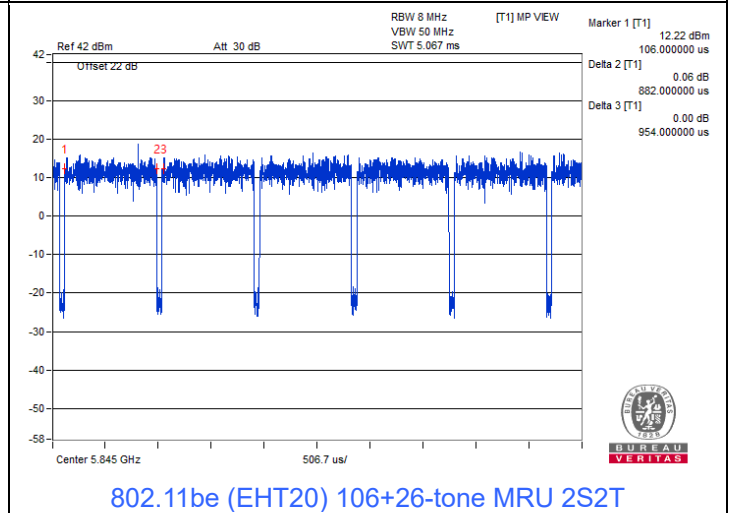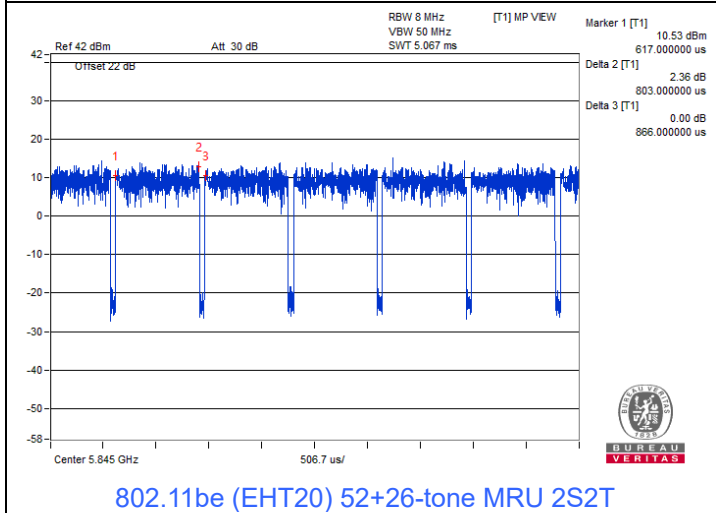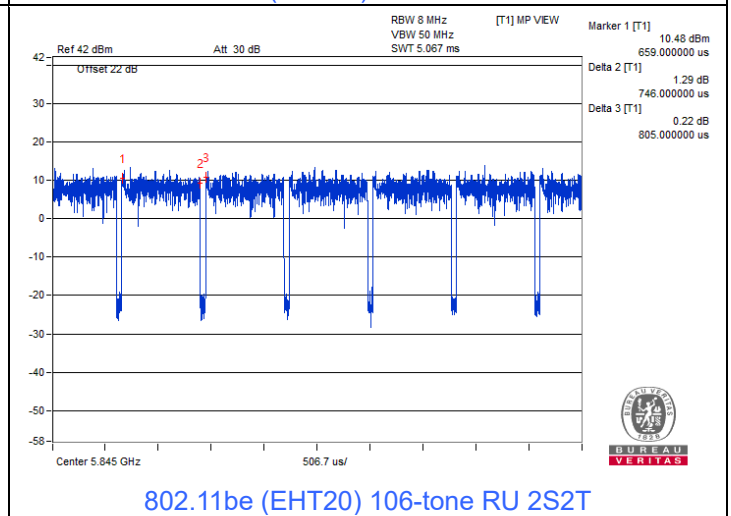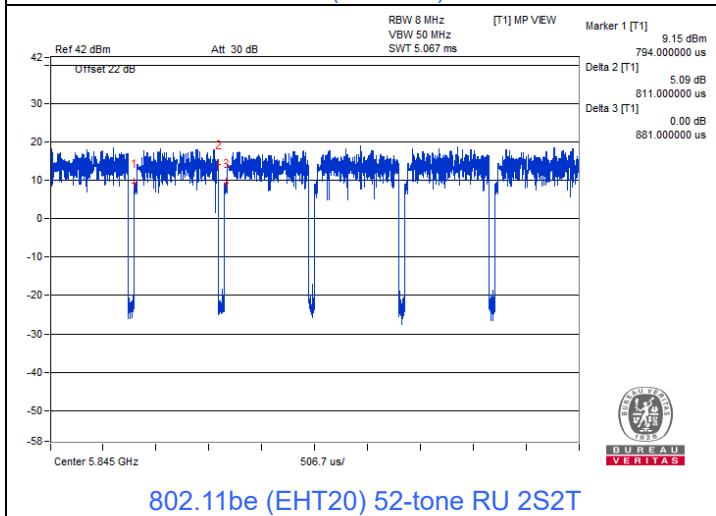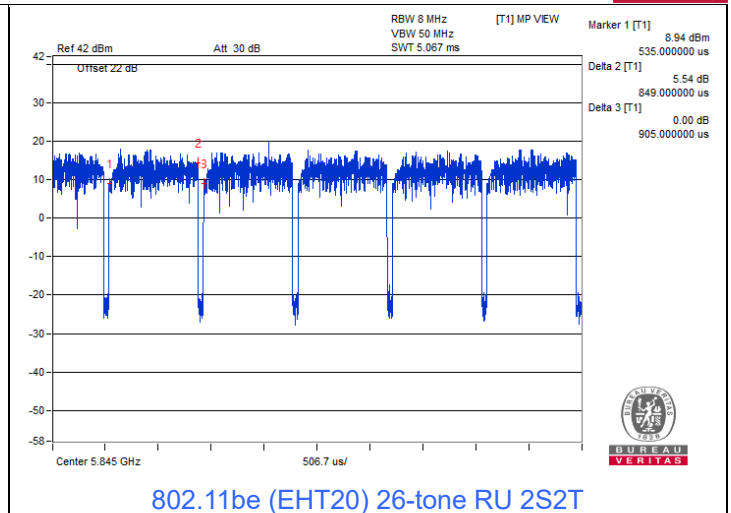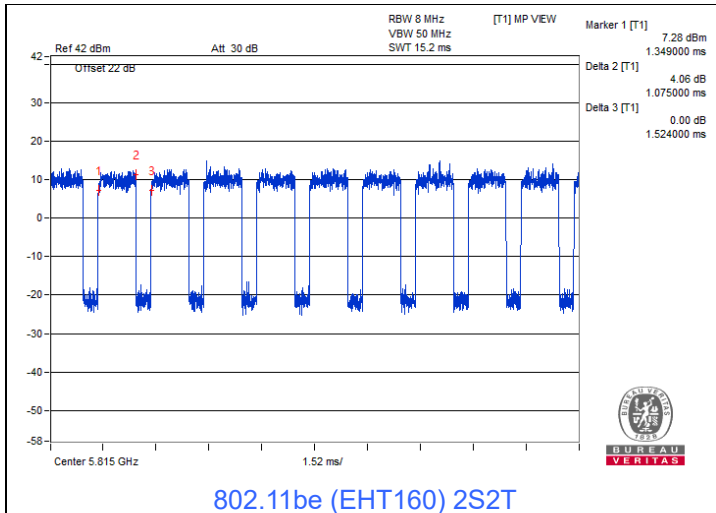



BUREAU
VERITAS

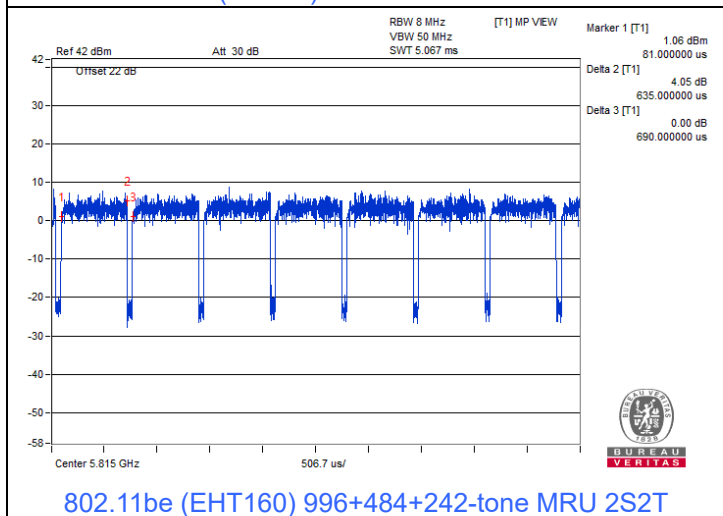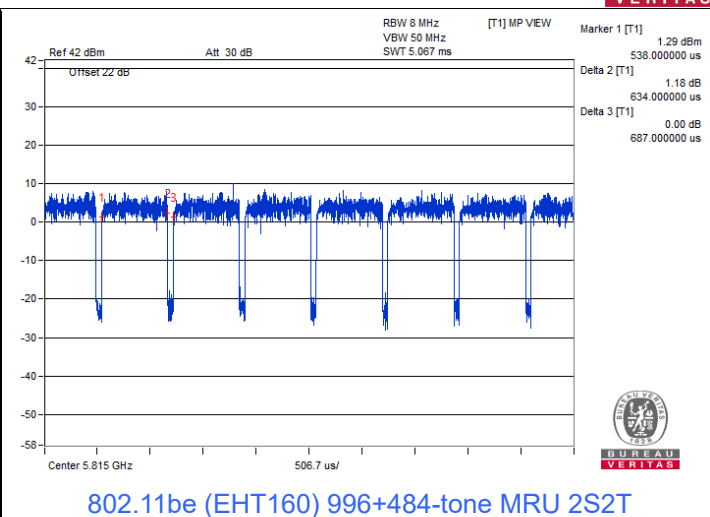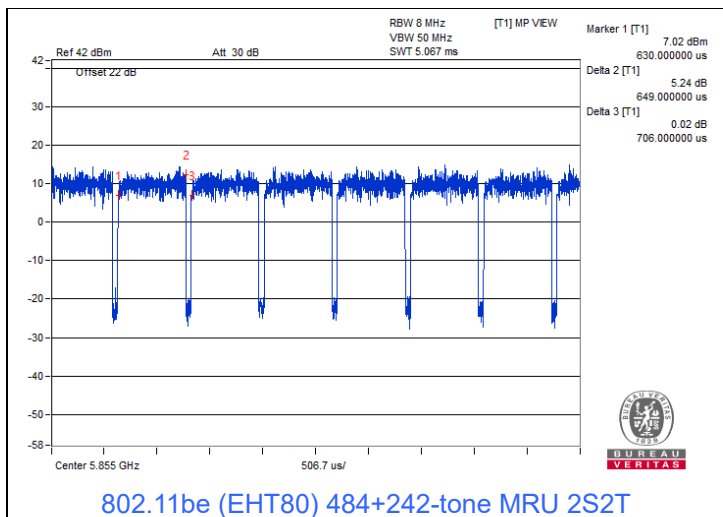


3.6 Test Program Used and Operation Descriptions


Controlling software (Wi-Fi:QAtool_V16 (0.0.2.104)) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

For Unwanted Emission test:

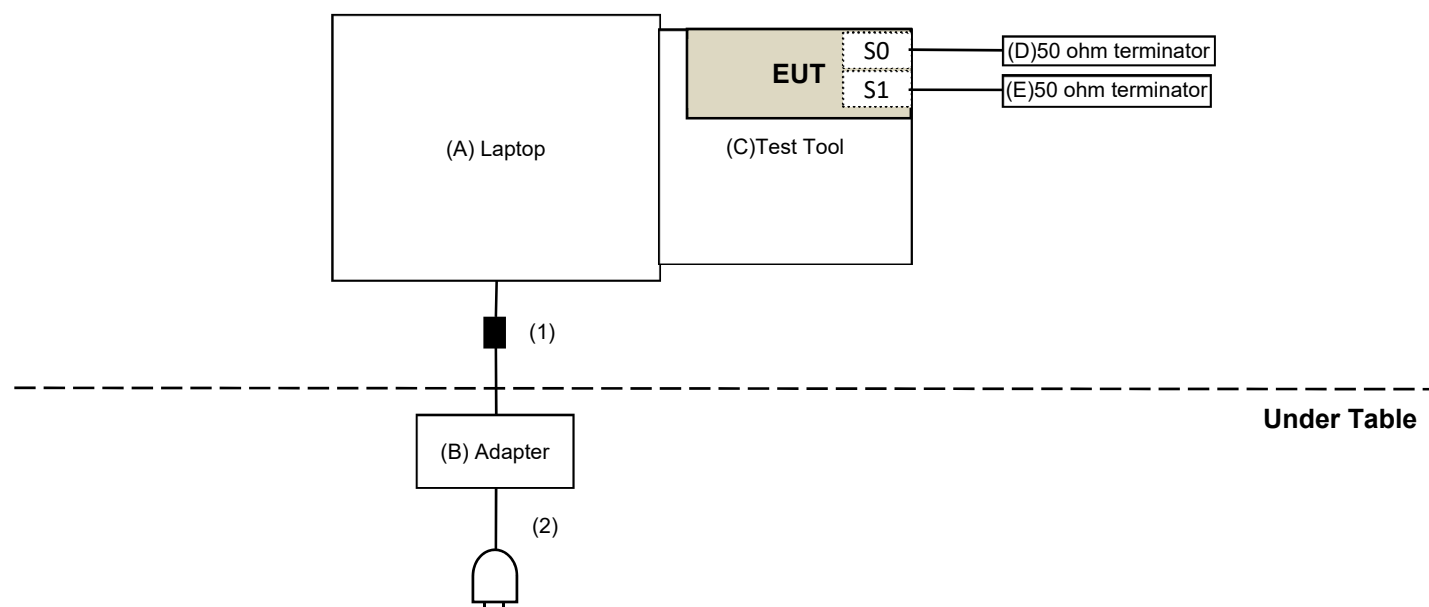

For AC Power Conducted Emission test:

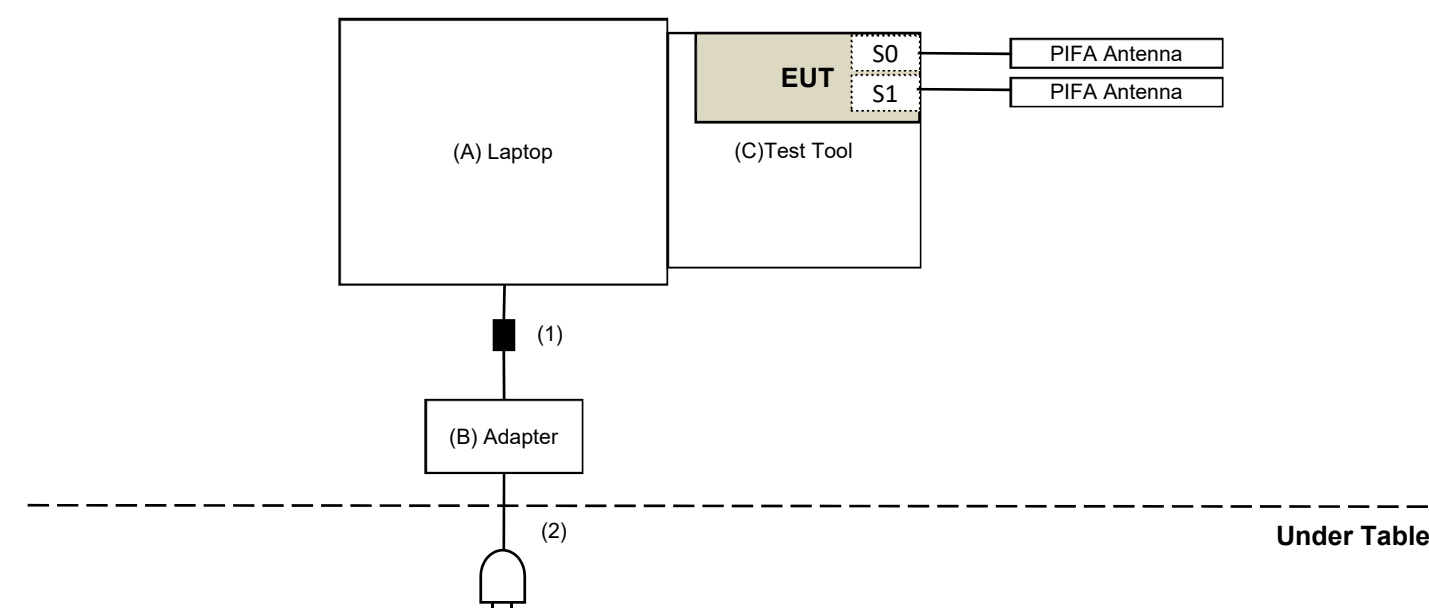

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenovo	L440	R90FM90G	N/A	Provided by Lab
B	Adapter	Lenovo	ADLX45DLC3A	N/A	N/A	Provided by Lab
C	Test Tool	Mediatek	MTK1849	N/A	N/A	Supplied by applicant
D	50 Ohm terminator	WOKEN	WTER-18S2	N/A	N/A	Provided by Lab
E	50 Ohm terminator	WOKEN	WTER-18S2	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.8	No	1	Provided by Lab
2	AC Cable	1	1	No	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Pulse Power Sensor Anritsu	MA2411B	1726434	2024/6/7	2025/6/6
RF Power Meter Anritsu	ML2495A	1529002	2024/6/7	2025/6/6

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2025/1/20 ~ 2025/2/26

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030A	MY55410176	2024/6/12	2025/6/11
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2025/1/20 ~ 2025/2/26

4.3 6 dB Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

4.4 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance Telegartner	50 ohm	3	2024/11/1	2025/10/31
EMI Test Receiver R&S	ESCS 30	100375	2024/5/20	2025/5/19
Fixed Attenuator STI	STI02-2200-10	005	2024/2/19	2025/2/18
LISN R&S	ESH3-Z5	835239/001	2024/4/3	2025/4/2
		848773/004	2024/10/7	2025/10/6
RF Coaxial Cable JYEBAO	5D-FB	COCCAB-001	2024/2/19	2025/2/18
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2024/12/19

4.5 Unwanted Emissions below 1 GHz

Mode A

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030A	MY55410176	2024/6/12	2025/6/11
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2024/12/30 ~ 2025/1/4

Mode B

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-406	2024/10/8	2025/10/7
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-03	2024/2/17	2025/2/16
Loop Antenna TESEQ	HLA 6121	63620	2024/10/17	2025/10/16
MXE EMI Receiver Agilent	N9038A	MY51210202	2024/7/29	2025/7/28
Preamplifier EMCI	EMC330N	980701	2024/2/17	2025/2/16
	EMC001340	980142	2024/2/19	2025/2/18
RF Coaxial Cable mTJ	100100-CFD400LW-200	CFD400-200	2024/2/17	2025/2/16
	100100-CFD400LW-400	CFD400-400	2024/2/17	2025/2/16
	100100-CFD400LW-800	CFD400-800	2024/2/17	2025/2/16
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 4.
2. Tested Date: 2024/12/19

4.6 Unwanted Emissions above 1 GHz

Mode A

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030A	MY55410176	2024/6/12	2025/6/11
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2024/12/27 ~ 2025/3/14

Mode B

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	N/A	N/A
Fix tool for Boresight antenna tower BV	FBA-01	FBA_SIP01	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-406	2024/11/10	2025/11/9
	BBHA 9170	9170-739	2024/11/10	2025/11/9
MXE EMI Receiver Agilent	N9038A	MY50010156	2024/6/5	2025/6/4
Preamplifier EMCI	EMC12630SE	980384	2025/1/14	2026/1/13
	EMC184045SE	980387	2024/8/8	2025/8/7
PXA Signal Analyzer Keysight	N9030B	MY57141948	2024/5/20	2025/5/19
RF Coaxial Cable EMCI	EMC102-KM-KM-1200	160924	2025/1/24	2026/1/23
	EMC102-KM-KM-4000	200214	2025/1/24	2026/1/23
	EMC104-SM-SM-1500	180504	2025/1/18	2026/1/17
	EMC104-SM-SM-2000	180601	2025/1/18	2026/1/17
	EMC104-SM-SM-6000	210201	2025/1/18	2026/1/17
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 3.
2. Tested Date: 2025/3/25

5 Limits of Test Items

5.1 RF Output Power

Device Category	Limit (Max Average Power)
Indoor access point	EIRP 36 dBm
Subordinate device	EIRP 36 dBm
Client device	EIRP 30 dBm
Note: For all U-NII-4 and U-NII-3 & -4 span channels shall met above EIRP values.	

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Power Spectral Density

Device Category	Limit
Indoor access point	EIRP 20 dBm/MHz
Subordinate device	EIRP 20 dBm/MHz
Client device	EIRP 14 dBm/MHz
Note: For all U-NII-4 and U-NII-3 & -4 span channels shall met above EIRP values.	

5.3 6 dB Bandwidth

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.4 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.5 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.6 Unwanted Emissions above 1 GHz

- (i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz.
- (ii) For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.
- (iii) For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

Note:


The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup




6.1.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup



6.2.2 Test Procedure


For specified measurement bandwidth 1 MHz:

Method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- Record the max value and add $10 \log (1/\text{duty cycle})$.

6.3 6 dB Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 AC Power Conducted Emissions

6.4.1 Test Setup

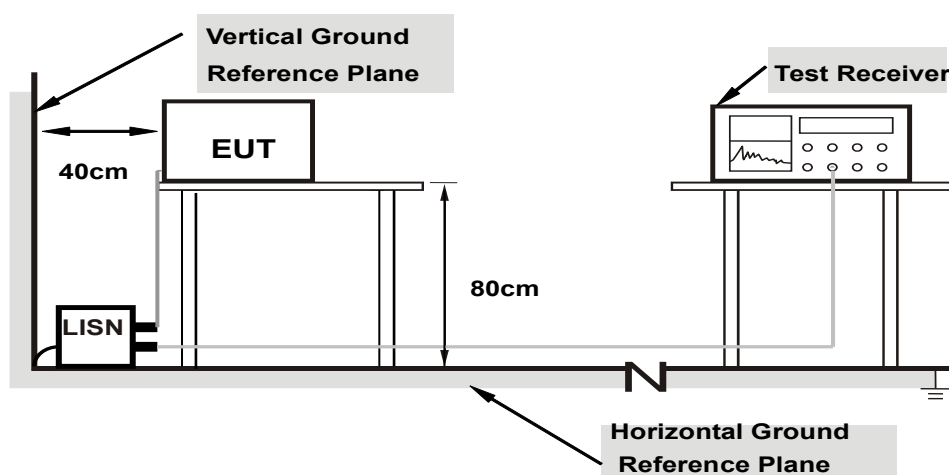

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.4.2 Test Procedure

- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.


Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.

6.5 Unwanted Emissions below 1 GHz


6.5.1 Test Setup

For Radiated Configuration:


For Radiated emission below 30 MHz

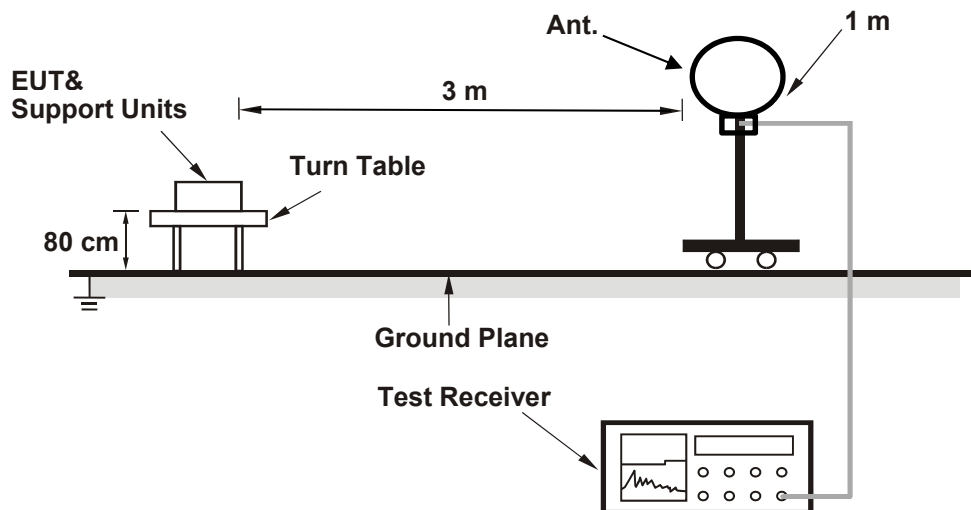

For Radiated emission above 30 MHz

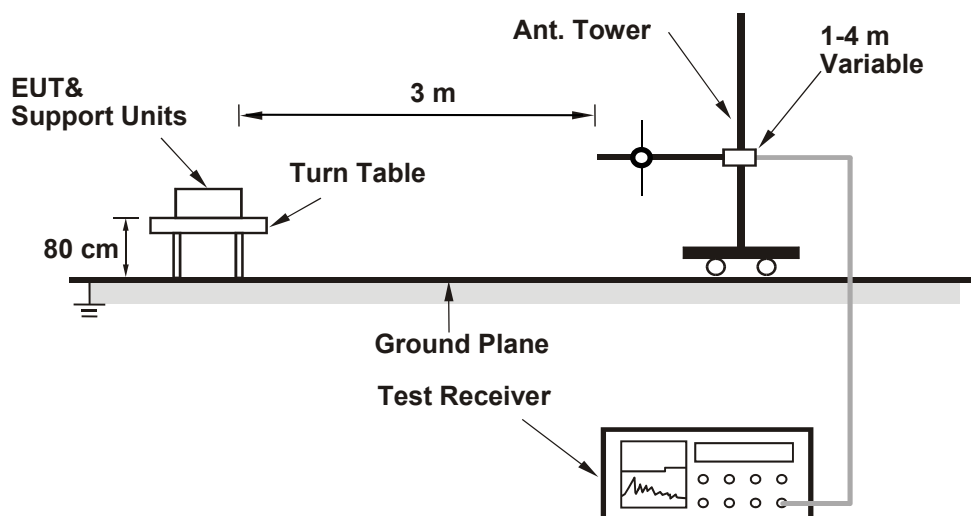

For Conducted Configuration:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure

Radiated versus Conducted Measurement.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.
- d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- e. For all of Radiation emission test

For Radiated emission below 30 MHz

- e-1.1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-1.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-1.3. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- e-1.4. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-1.5. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz

- e-2.1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-2.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-2.3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e-2.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-2.5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

Radiated versus Conducted Measurement

For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Unwanted Emission Convert Formula

- a. $\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$
 $d = \text{measurement distance in 3 meters.}$
- b. $\text{EIRP Level (dBm)} = \text{Raw Value(dBm)} + \text{Correction Factor(dB)}$
- c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal.
 For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.
 For the band edge the gain for the specific band may have been used.


Notes:

1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection:
 For frequencies between 30 MHz and 1000 MHz, add 4.7 dB.
2. The conducted emission test was considered some factor to compute test result.


6.6 Unwanted Emissions above 1 GHz

6.6.1 Test Setup

For Radiated Configuration:

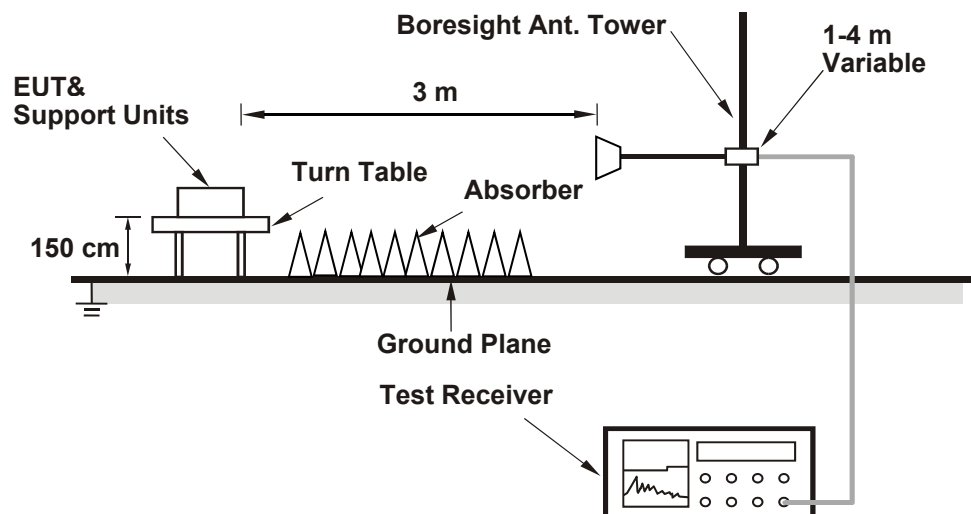

For Conducted Configuration:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

Radiated versus Conducted Measurement.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.
- EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- For all of Radiation emission test
 - The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
 - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

- e-3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e-4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-5. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
2. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
 For Integration method:
 - i. For band edge measurement, the integration method is used, the resolution bandwidth of test spectrum analyzer is 100 kHz and the video bandwidth is 300 kHz. Please refer to the following for other instrument settings.
 - ii. Using the detector peak method, refer to ANSI C63.10 section 12.7.4.4.3 (a) and 12.7.6, the peak value = peak reading value.
 - iii. Using the detector RMS (power averaging) method, refer to ANSI C63.10 section 12.7.4.4.3 (b) and 12.7.7, the Average value = Average Reading + Duty Cycle Correction Factor. For duty cycle correction factor values, see the Test Signal Duty Cycle section in this report.
3. All modes of operation were investigated and the worst-case emissions are reported.

Radiated versus Conducted Measurement

For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

For Verified radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

Conducted Unwanted Emission Convert Formula

- a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.
 - b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB).
 - c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal.
 For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.
 For the band edge the gain for the specific band may have been used.
- Note: The conducted emission test was considered some factor to compute test result.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 65% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------

802.11a 1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	45.709	16.60	8.37	314.052	24.97	30	Pass
173	5865	46.026	16.63	8.37	316.23	25	30	Pass
177	5885	49.204	16.92	8.37	338.065	25.29	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11ac (VHT20) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	43.152	16.35	8.37	296.484	24.72	30	Pass
173	5865	47.753	16.79	8.37	328.096	25.16	30	Pass
177	5885	45.394	16.57	8.37	311.888	24.94	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11ac (VHT40) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
167	5835	85.507	19.32	8.37	587.492	27.69	30	Pass
175	5875	83.368	19.21	8.37	572.795	27.58	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11ac (VHT80) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
171	5855	120.226	20.80	8.37	826.035	29.17	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11ac (VHT160) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
163	5815	70.958	18.51	8.37	487.53	26.88	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11ax (HE20) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	44.978	16.53	8.37	309.03	24.9	30	Pass
173	5865	49.774	16.97	8.37	341.981	25.34	30	Pass
177	5885	46.666	16.69	8.37	320.627	25.06	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11ax (HE40) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
167	5835	88.512	19.47	8.37	608.138	27.84	30	Pass
175	5875	86.896	19.39	8.37	597.035	27.76	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11ax (HE80) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
171	5855	124.738	20.96	8.37	857.035	29.33	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11ax (HE160) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
163	5815	71.945	18.57	8.37	494.311	26.94	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT20) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	46.559	16.68	8.37	319.892	25.05	30	Pass
173	5865	51.05	17.08	8.37	350.748	25.45	30	Pass
177	5885	48.306	16.84	8.37	331.895	25.21	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT40) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
167	5835	91.833	19.63	8.37	630.956	28	30	Pass
175	5875	89.536	19.52	8.37	615.174	27.89	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT80) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
171	5855	128.825	21.10	8.37	885.116	29.47	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT160) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
163	5815	72.946	18.63	8.37	501.189	27	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11ax (HE20) 26-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	8.81	9.45	8.37	60.531	17.82	30	Pass
173	5865	8.73	9.41	8.37	59.981	17.78	30	Pass
177	5885	8.61	9.35	8.37	59.157	17.72	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11ax (HE20) 52-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	15.524	11.91	8.37	106.661	20.28	30	Pass
173	5865	15.276	11.84	8.37	104.957	20.21	30	Pass
177	5885	16.144	12.08	8.37	110.92	20.45	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11ax (HE20) 106-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	34.754	15.41	8.37	238.784	23.78	30	Pass
173	5865	34.754	15.41	8.37	238.784	23.78	30	Pass
177	5885	34.277	15.35	8.37	235.506	23.72	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT20) 26-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	9.016	9.55	8.37	61.946	17.92	30	Pass
173	5865	8.954	9.52	8.37	61.52	17.89	30	Pass
177	5885	8.995	9.54	8.37	61.802	17.91	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT20) 52-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	16.106	12.07	8.37	110.659	20.44	30	Pass
173	5865	15.996	12.04	8.37	109.903	20.41	30	Pass
177	5885	16.711	12.23	8.37	114.816	20.6	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT20) 106-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	35.645	15.52	8.37	244.906	23.89	30	Pass
173	5865	35.563	15.51	8.37	244.342	23.88	30	Pass
177	5885	35.156	15.46	8.37	241.546	23.83	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT20) 52+26-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	25.527	14.07	8.37	175.388	22.44	30	Pass
173	5865	25.119	14.00	8.37	172.585	22.37	30	Pass
177	5885	25.235	14.02	8.37	173.382	22.39	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT20) 106+26-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	31.769	15.02	8.37	218.275	23.39	30	Pass
173	5865	31.696	15.01	8.37	217.773	23.38	30	Pass
177	5885	30.903	14.90	8.37	212.325	23.27	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT80) 484+242-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
171	5855	128.529	21.09	8.37	883.082	29.46	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT160) 996+484-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
163	5815	71.121	18.52	8.37	488.65	26.89	30	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT160) 996+484+242-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
163	5815	71.45	18.54	8.37	490.91	26.91	30	Pass

Note: The antenna gain is 8.37 dBi.

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 65% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------

802.11a 2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	10.75	10.53	23.183	13.65	8.37	159.283	22.02	30	Pass
173	5865	10.39	10.60	22.421	13.51	8.37	154.048	21.88	30	Pass
177	5885	10.74	10.80	23.88	13.78	8.37	164.072	22.15	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 8.37 dBi.

802.11ac (VHT20) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	13.97	13.64	48.067	16.82	8.37	330.253	25.19	30	Pass
173	5865	13.55	13.90	47.194	16.74	8.37	324.255	25.11	30	Pass
177	5885	13.81	14.09	49.688	16.96	8.37	341.391	25.33	30	Pass

Note: The directional gain is 8.37 dBi.

802.11ac (VHT40) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
167	5835	16.42	16.15	85.063	19.30	8.37	584.441	27.67	30	Pass
175	5875	16.43	16.72	90.944	19.59	8.37	624.848	27.96	30	Pass

Note: The directional gain is 8.37 dBi.

802.11ac (VHT80) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
171	5855	17.82	17.50	116.768	20.67	8.37	802.276	29.04	30	Pass

Note: The directional gain is 8.37 dBi.

802.11ac (VHT160) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
163	5815	17.83	17.58	117.953	20.72	8.37	810.418	29.09	30	Pass

Note: The directional gain is 8.37 dBi.

802.11ax (HE20) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	14.15	13.81	50.045	16.99	8.37	343.843	25.36	30	Pass
173	5865	13.74	14.00	48.778	16.88	8.37	335.138	25.25	30	Pass
177	5885	14.02	14.15	51.236	17.10	8.37	352.026	25.47	30	Pass

Note: The directional gain is 8.37 dBi.

802.11ax (HE40) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
167	5835	16.57	16.26	87.661	19.43	8.37	602.291	27.8	30	Pass
175	5875	16.57	16.85	93.811	19.72	8.37	644.546	28.09	30	Pass

Note: The directional gain is 8.37 dBi.

802.11ax (HE80) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
171	5855	18.01	17.69	121.99	20.86	8.37	838.155	29.23	30	Pass

Note: The directional gain is 8.37 dBi.

802.11ax (HE160) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
163	5815	17.96	17.70	121.402	20.84	8.37	834.115	29.21	30	Pass

Note: The directional gain is 8.37 dBi.

802.11be (EHT20) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	14.28	13.93	51.509	17.12	8.37	353.902	25.49	30	Pass
173	5865	13.84	14.13	50.092	17.00	8.37	344.166	25.37	30	Pass
177	5885	14.13	14.24	52.428	17.20	8.37	360.216	25.57	30	Pass

Note: The directional gain is 8.37 dBi.

802.11be (EHT40) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
167	5835	16.71	16.41	90.634	19.57	8.37	622.718	27.94	30	Pass
175	5875	16.73	17.00	97.216	19.88	8.37	667.94	28.25	30	Pass

Note: The directional gain is 8.37 dBi.

802.11be (EHT80) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
171	5855	18.15	17.86	126.407	21.02	8.37	868.503	29.39	30	Pass

Note: The directional gain is 8.37 dBi.

802.11be (EHT160) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
163	5815	18.13	17.85	125.967	21.00	8.37	865.48	29.37	30	Pass

Note: The directional gain is 8.37 dBi.

802.11ax (HE20) 26-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	6.47	6.43	8.832	9.46	8.37	60.682	17.83	30	Pass
173	5865	6.29	6.52	8.743	9.42	8.37	60.07	17.79	30	Pass
177	5885	6.25	6.52	8.704	9.40	8.37	59.802	17.77	30	Pass

Note: The directional gain is 8.37 dBi.

802.11ax (HE20) 52-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	9.05	8.77	15.569	11.92	8.37	106.97	20.29	30	Pass
173	5865	8.98	9.38	16.576	12.19	8.37	113.888	20.56	30	Pass
177	5885	8.99	9.37	16.575	12.19	8.37	113.882	20.56	30	Pass

Note: The directional gain is 8.37 dBi.

802.11ax (HE20) 106-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	12.33	12.06	33.17	15.21	8.37	227.901	23.58	30	Pass
173	5865	12.19	12.50	34.34	15.36	8.37	235.939	23.73	30	Pass
177	5885	12.19	12.44	34.097	15.33	8.37	234.27	23.7	30	Pass

Note: The directional gain is 8.37 dBi.

802.11be (EHT20) 26-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	6.61	6.56	9.11	9.60	8.37	62.592	17.97	30	Pass
173	5865	6.37	6.54	8.843	9.47	8.37	60.757	17.84	30	Pass
177	5885	6.28	6.55	8.765	9.43	8.37	60.222	17.8	30	Pass

Note: The directional gain is 8.37 dBi.

802.11be (EHT20) 52-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	9.22	8.90	16.119	12.07	8.37	110.749	20.44	30	Pass
173	5865	9.15	9.57	17.28	12.38	8.37	118.725	20.75	30	Pass
177	5885	9.18	9.50	17.192	12.35	8.37	118.121	20.72	30	Pass

Note: The directional gain is 8.37 dBi.

802.11be (EHT20) 106-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	12.49	12.16	34.186	15.34	8.37	234.881	23.71	30	Pass
173	5865	12.31	12.63	35.345	15.48	8.37	242.844	23.85	30	Pass
177	5885	12.29	12.60	35.14	15.46	8.37	241.436	23.83	30	Pass

Note: The directional gain is 8.37 dBi.

802.11be (EHT20) 52+26-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	11.00	10.84	24.723	13.93	8.37	169.864	22.3	30	Pass
173	5865	10.55	11.01	23.968	13.80	8.37	164.677	22.17	30	Pass
177	5885	11.02	11.50	26.773	14.28	8.37	183.949	22.65	30	Pass

Note: The directional gain is 8.37 dBi.

802.11be (EHT20) 106+26-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	11.63	11.37	28.263	14.51	8.37	194.186	22.88	30	Pass
173	5865	11.46	11.82	29.201	14.65	8.37	200.631	23.02	30	Pass
177	5885	11.71	11.93	30.421	14.83	8.37	209.013	23.2	30	Pass

Note: The directional gain is 8.37 dBi.

802.11be (EHT80) 484+242-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
171	5855	18.14	17.81	125.558	20.99	8.37	862.669	29.36	30	Pass

Note: The directional gain is 8.37 dBi.

802.11be (EHT160) 996+484-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
163	5815	18.08	17.78	124.248	20.94	8.37	853.669	29.31	30	Pass

Note: The directional gain is 8.37 dBi.

802.11be (EHT160) 996+484+242-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
163	5815	18.11	17.85	125.668	20.99	8.37	863.425	29.36	30	Pass

Note: The directional gain is 8.37 dBi.

7.2 Power Spectral Density

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 65% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------

802.11a 1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	2.94	2.11	5.05	8.37	13.42	14	Pass
173	5865	2.65	2.11	4.76	8.37	13.13	14	Pass
177	5885	2.84	2.11	4.95	8.37	13.32	14	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT20) 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	3.73	1.03	4.76	8.37	13.13	14	Pass
173	5865	4	1.03	5.03	8.37	13.4	14	Pass
177	5885	3.75	1.03	4.78	8.37	13.15	14	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT40) 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
167	5835	3.89	1.03	4.92	8.37	13.29	14	Pass
175	5875	3.79	1.03	4.82	8.37	13.19	14	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT80) 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
171	5855	2.55	1.08	3.63	8.37	12	14	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT160) 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
163	5815	-2.48	0.9	-1.58	8.37	6.79	14	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT20) 26-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	4.85	0.15	5.00	8.37	13.37	14	Pass
173	5865	4.71	0.15	4.86	8.37	13.23	14	Pass
177	5885	4.89	0.15	5.04	8.37	13.41	14	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT20) 52-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	4.44	0.22	4.66	8.37	13.03	14	Pass
173	5865	4.42	0.22	4.64	8.37	13.01	14	Pass
177	5885	4.79	0.22	5.01	8.37	13.38	14	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT20) 106-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	4.82	0.16	4.98	8.37	13.35	14	Pass
173	5865	4.71	0.16	4.87	8.37	13.24	14	Pass
177	5885	4.65	0.16	4.81	8.37	13.18	14	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT20) 52+26-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	4.75	0.2	4.95	8.37	13.32	14	Pass
173	5865	4.58	0.2	4.78	8.37	13.15	14	Pass
177	5885	4.59	0.2	4.79	8.37	13.16	14	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT20) 106+26-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	4.85	0.18	5.03	8.37	13.4	14	Pass
173	5865	4.72	0.18	4.90	8.37	13.27	14	Pass
177	5885	4.73	0.18	4.91	8.37	13.28	14	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT80) 484+242-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
171	5855	4.38	0.25	4.63	8.37	13	14	Pass

Note: The antenna gain is 8.37 dBi.

802.11be (EHT160) 996+484-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
163	5815	-1.19	0.22	-0.97	8.37	7.4	14	Pass







Note: The antenna gain is 8.37 dBi.

802.11be (EHT160) 996+484+242-tone MRU 1S1T


Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
163	5815	-1.69	0.2	-1.49	8.37	6.88	14	Pass

Note: The antenna gain is 8.37 dBi.


Spectrum Plot of Maximum Value

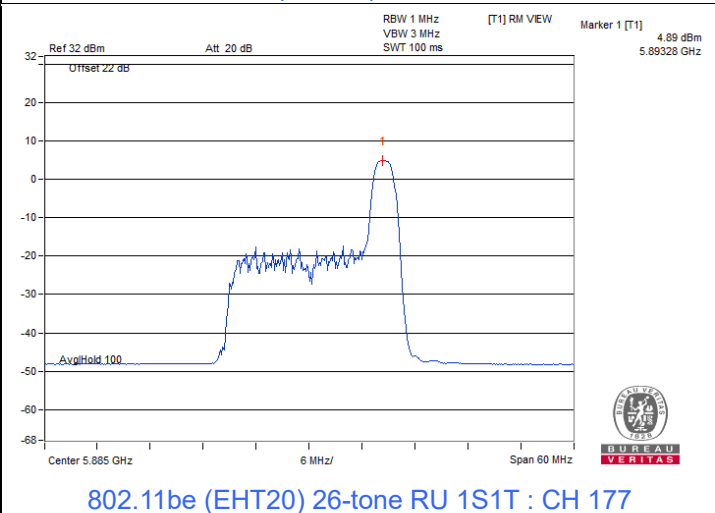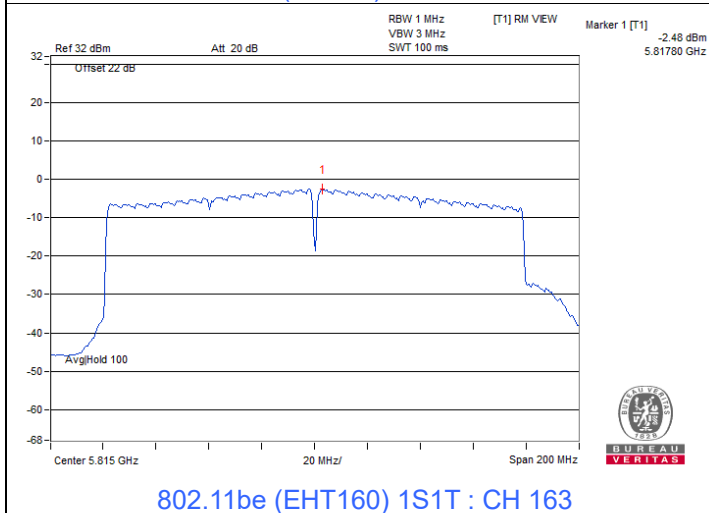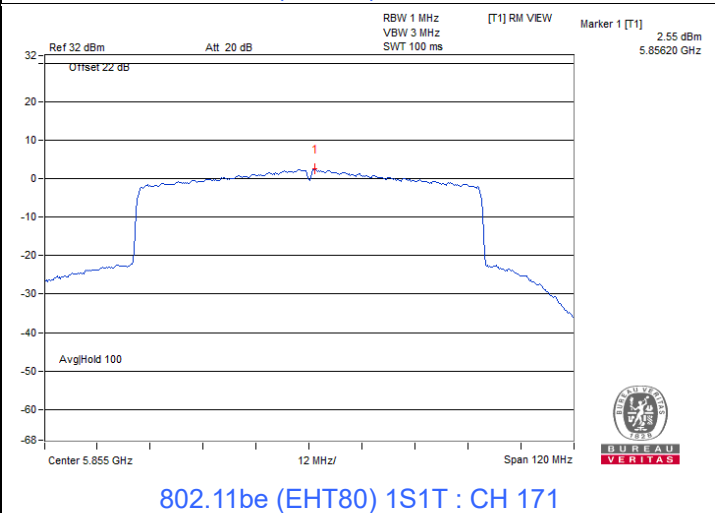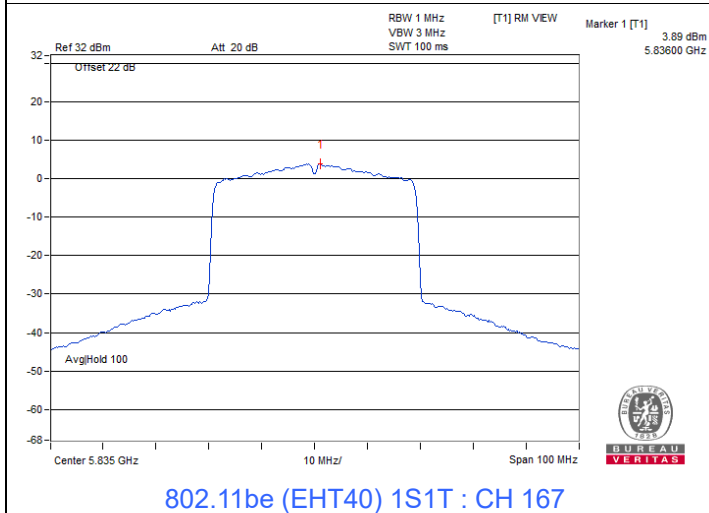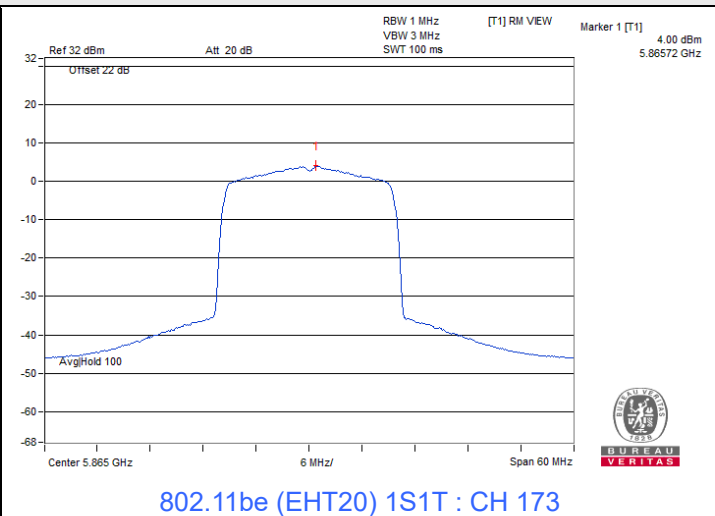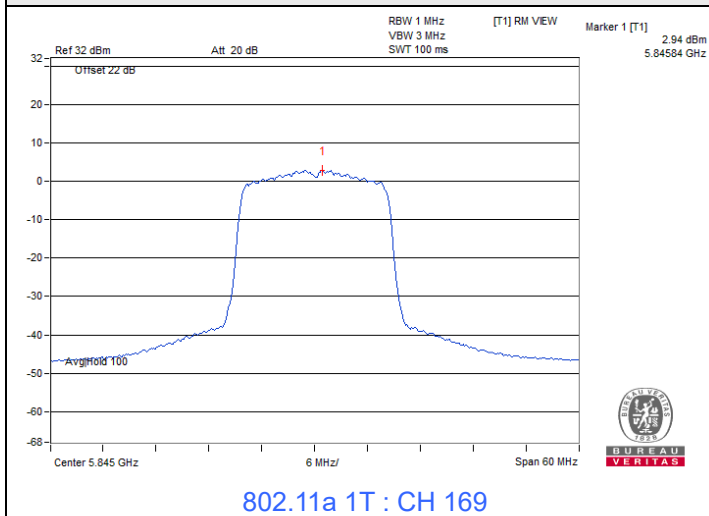


Spectrum Plot of Maximum Value

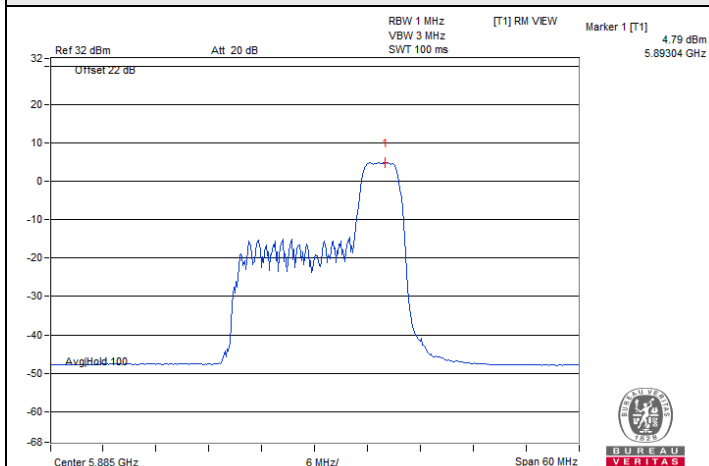


802.11be (EHT20) 52-tone RU 1S1T : CH 177

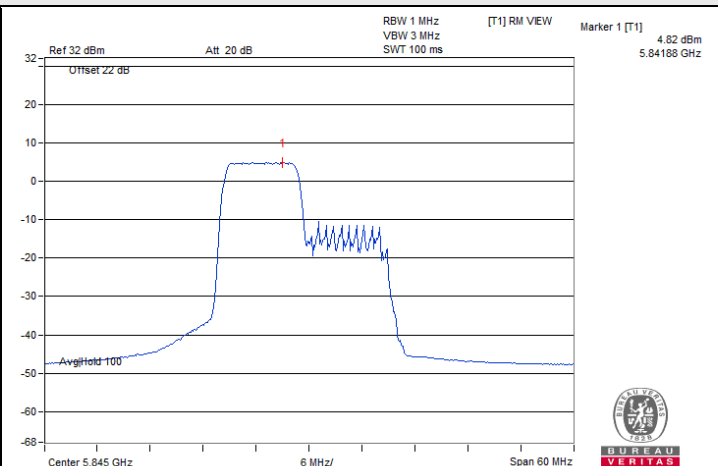


802.11be (EHT20) 106-tone RU 1S1T : CH 169

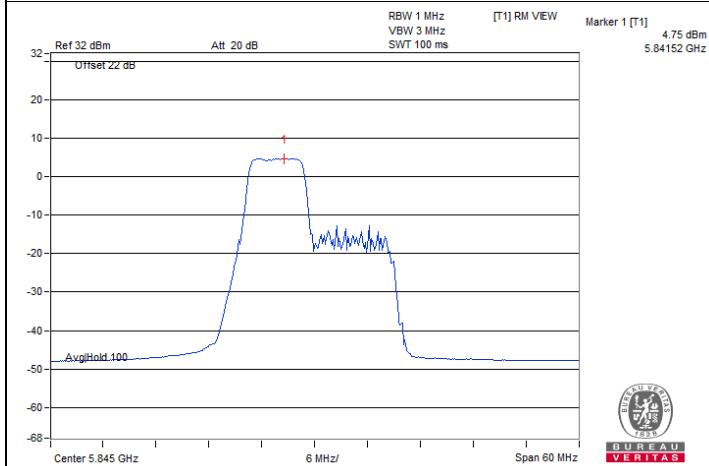


802.11be (EHT20) 52+26-tone MRU 1S1T : CH 169

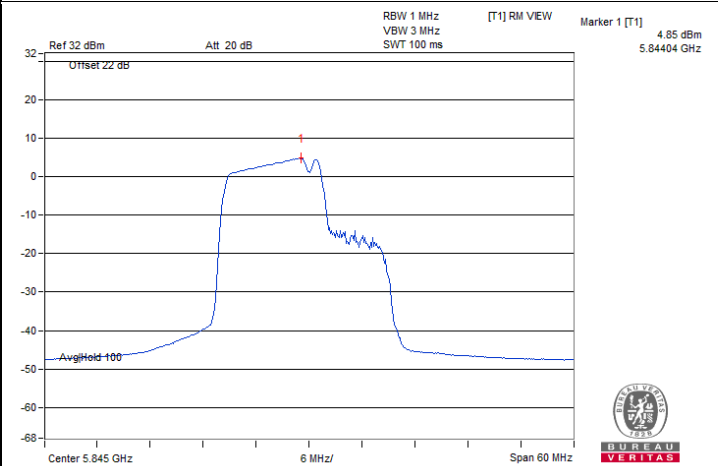

802.11be (EHT20) 106+26-tone MRU 1S1T : CH 169

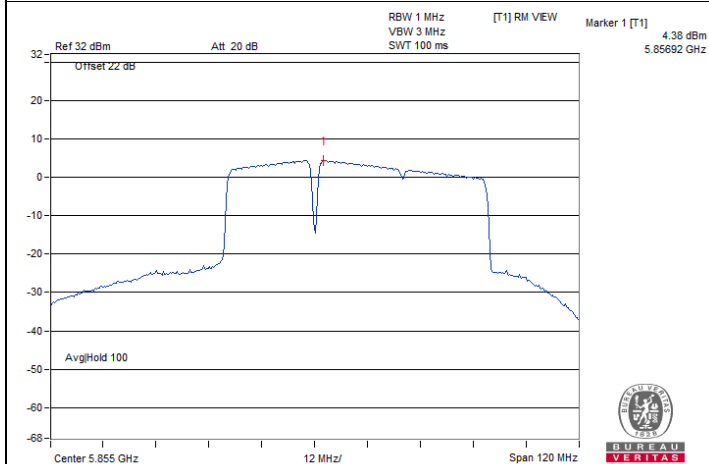


802.11be (EHT80) 484+242-tone MRU 1S1T : CH 171

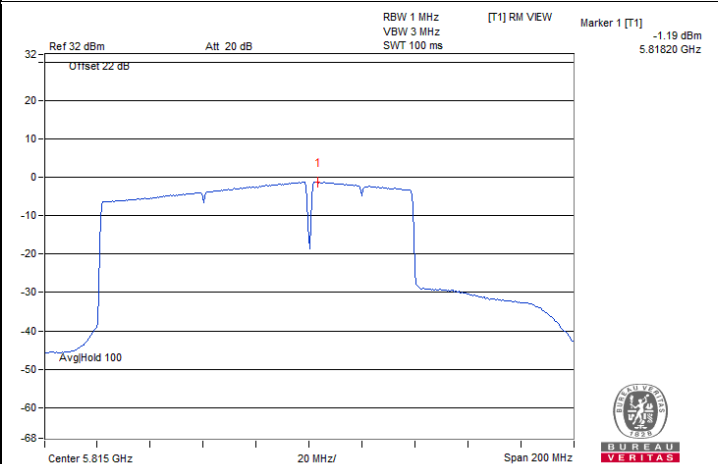

802.11be (EHT160) 996+484-tone MRU 1S1T : CH 163

Spectrum Plot of Maximum Value

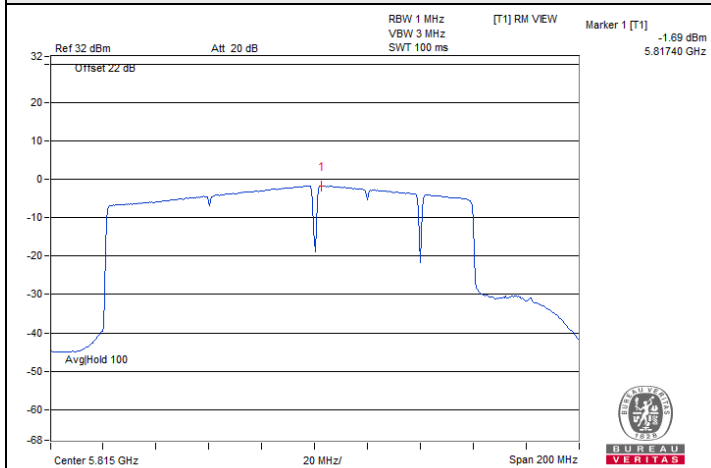

802.11be (EHT160) 996+484+242-tone MRU 1S1T : CH
163

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 65% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------

802.11a 2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	-2.95	-3.63	2.08	1.81	11.38	13.19	14	Pass
173	5865	-3.55	-3.27	2.08	1.68	11.38	13.06	14	Pass
177	5885	-3.14	-2.98	2.08	2.03	11.38	13.41	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 11.38 dBi.

802.11be (EHT20) 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	0.34	0.11	1.81	5.05	8.37	13.42	14	Pass
173	5865	-0.41	0.22	1.81	4.74	8.37	13.11	14	Pass
177	5885	0.25	0.34	1.81	5.12	8.37	13.49	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain is 8.37 dBi.

802.11be (EHT40) 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
167	5835	-0.13	0.35	1.83	4.96	8.37	13.33	14	Pass
175	5875	-0.43	0.50	1.83	4.90	8.37	13.27	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain is 8.37 dBi.

802.11be (EHT80) 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
171	5855	-1.53	-1.81	1.88	3.22	8.37	11.59	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain is 8.37 dBi.

802.11be (EHT160) 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
163	5815	-3.81	-4.49	1.52	0.39	8.37	8.76	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain is 8.37 dBi.

802.11be (EHT20) 26-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	1.59	1.72	0.28	4.95	8.37	13.32	14	Pass
173	5865	1.36	1.64	0.28	4.79	8.37	13.16	14	Pass
177	5885	1.32	1.35	0.28	4.63	8.37	13	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain is 8.37 dBi.

802.11be (EHT20) 52-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	1.56	1.12	0.36	4.72	8.37	13.09	14	Pass
173	5865	1.47	1.87	0.36	5.04	8.37	13.41	14	Pass
177	5885	1.57	1.64	0.36	4.98	8.37	13.35	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain is 8.37 dBi.

802.11be (EHT20) 106-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	1.84	1.34	0.33	4.94	8.37	13.31	14	Pass
173	5865	1.63	1.90	0.33	5.11	8.37	13.48	14	Pass
177	5885	1.53	1.90	0.33	5.06	8.37	13.43	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain is 8.37 dBi.

802.11be (EHT20) 52+26-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	1.89	1.46	0.33	5.02	8.37	13.39	14	Pass
173	5865	1.12	1.71	0.33	4.77	8.37	13.14	14	Pass
177	5885	1.49	2.03	0.33	5.11	8.37	13.48	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain is 8.37 dBi.

802.11be (EHT20) 106+26-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	1.82	1.15	0.34	4.85	8.37	13.22	14	Pass
173	5865	1.45	1.82	0.34	4.99	8.37	13.36	14	Pass
177	5885	1.66	1.83	0.34	5.10	8.37	13.47	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain is 8.37 dBi.

802.11be (EHT80) 484+242-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
171	5855	0.93	0.48	0.37	4.09	8.37	12.46	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain is 8.37 dBi.

802.11be (EHT160) 996+484-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
163	5815	-2.45	-2.66	0.35	0.81	8.37	9.18	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain is 8.37 dBi.


802.11be (EHT160) 996+484+242-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
163	5815	-2.95	-3.16	0.36	0.32	8.37	8.69	14	Pass


Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain is 8.37 dBi.


Spectrum Plot of Maximum Value

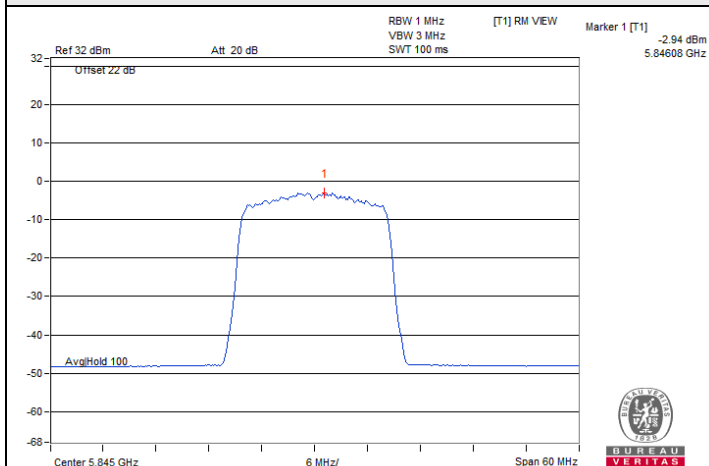


802.11a 2T / Chain 0 : CH 169

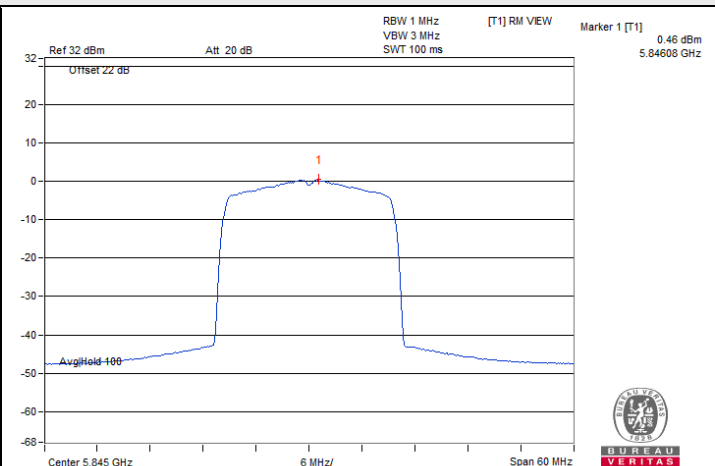


802.11be (EHT20) 2S2T / Chain 0 : CH 169

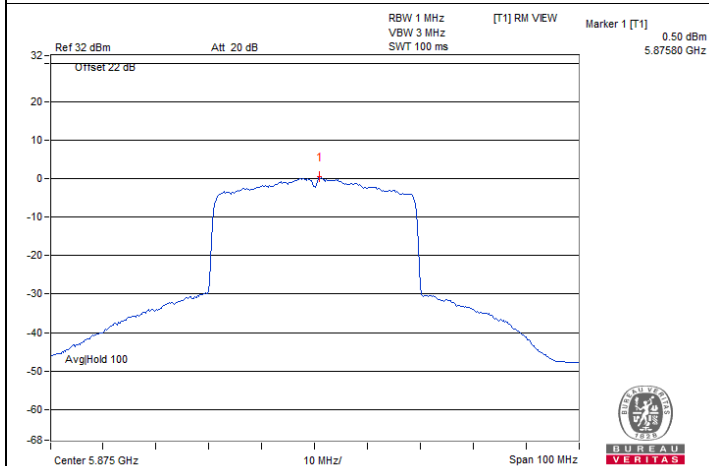


802.11be (EHT40) 2S2T / Chain 1 : CH 175

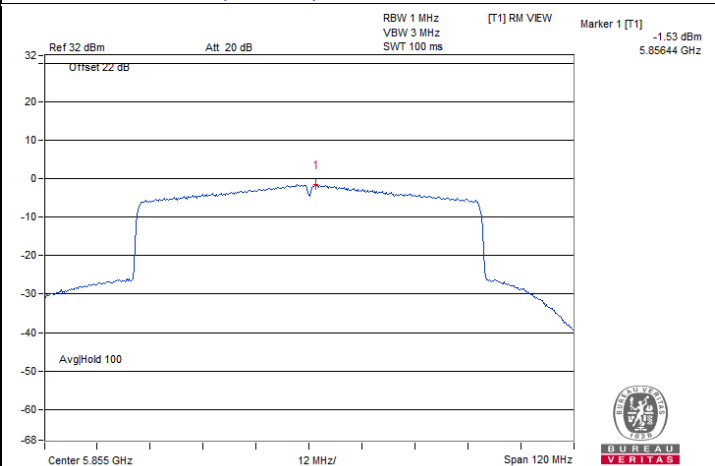

802.11be (EHT80) 2S2T / Chain 0 : CH 171






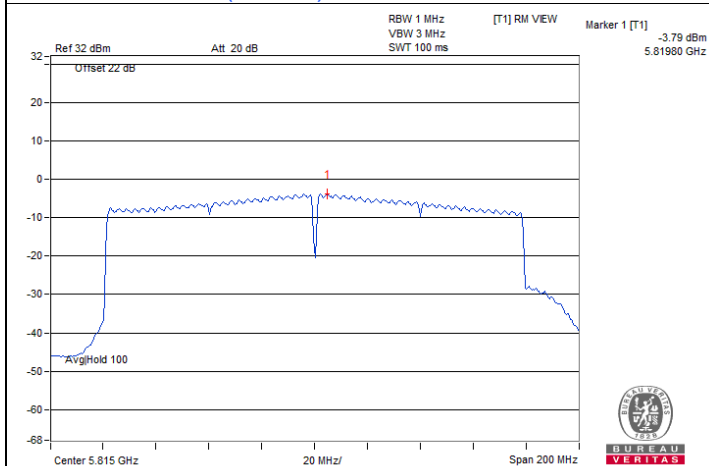


802.11be (EHT160) 2S2T / Chain 0 : CH 163

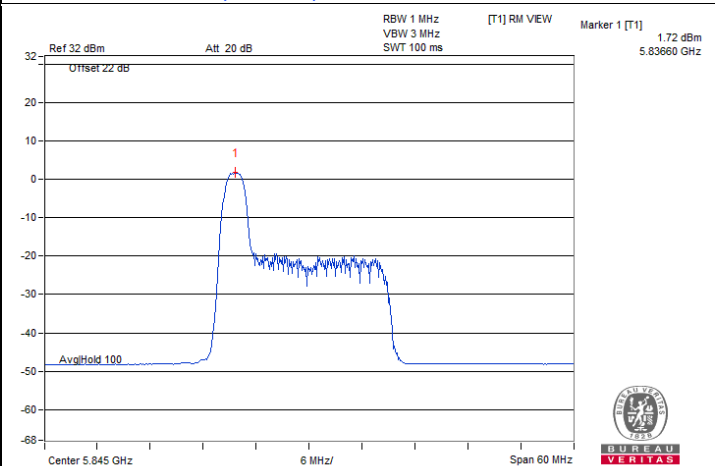


802.11be (EHT20) 26-tone RU 2S2T / Chain 1 : CH 169

Spectrum Plot of Maximum Value

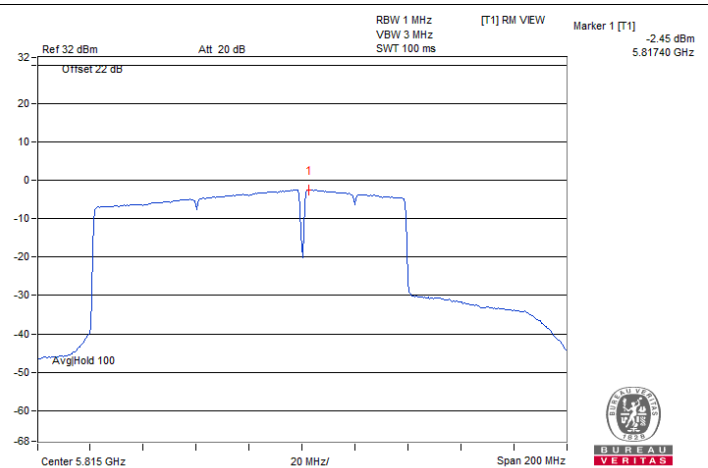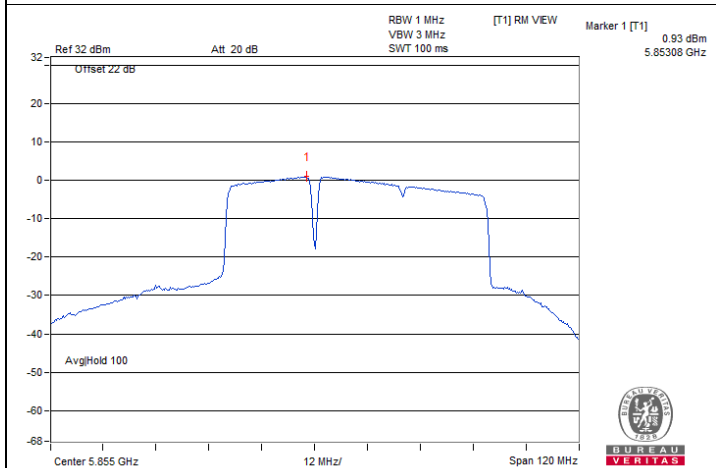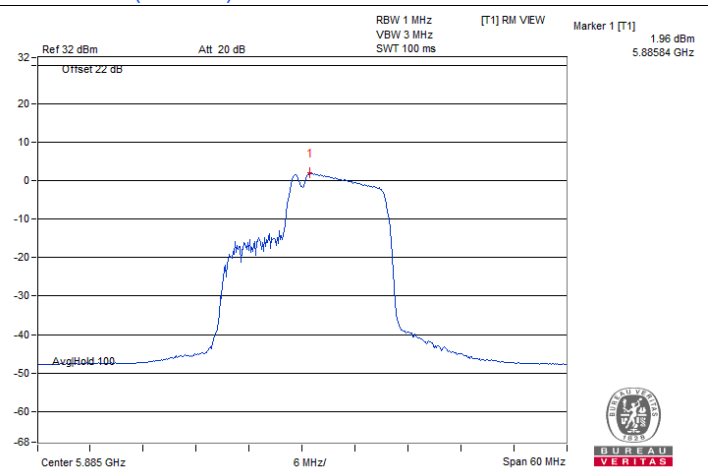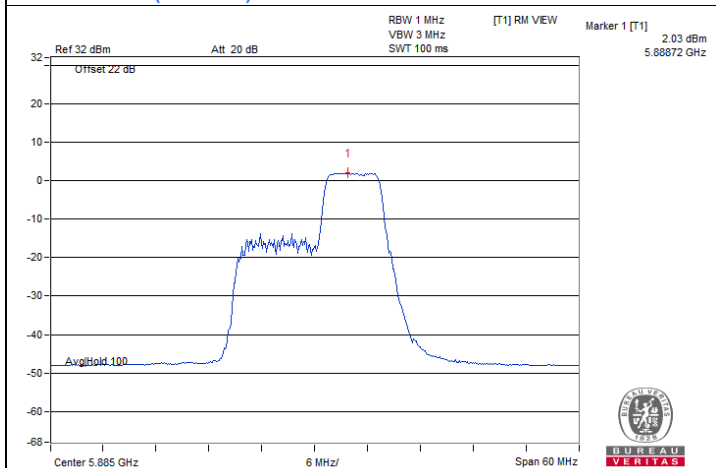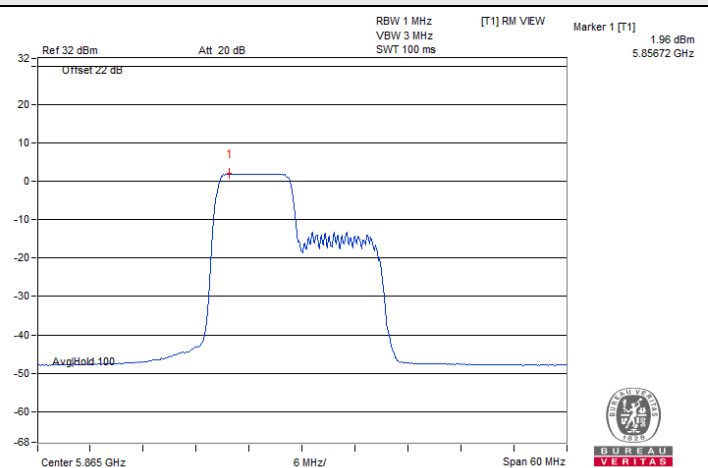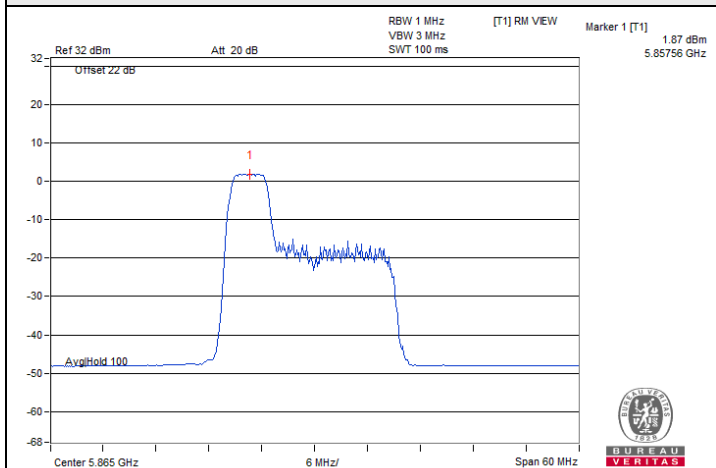

Spectrum Plot of Maximum Value

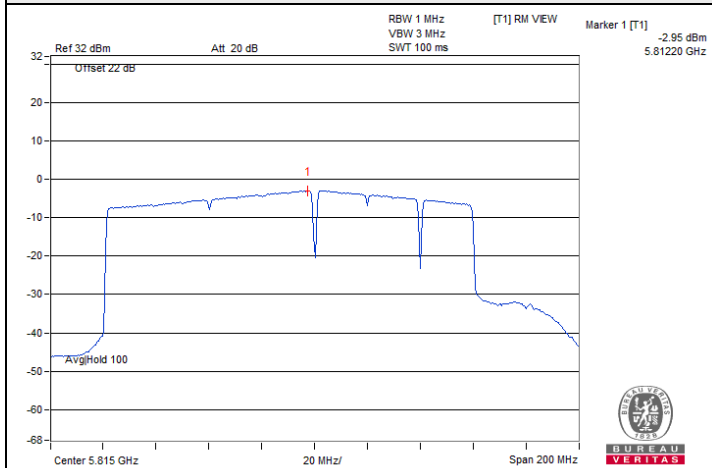

802.11be (EHT160) 996+484+242-tone MRU 2S2T / Chain
0 : CH 163

7.3 6 dB Bandwidth

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 65% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------

802.11a 1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	15.02	0.5	Pass
173	5865	15.1	0.5	Pass
177	5885	15.09	0.5	Pass

802.11be (EHT20) 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	17.27	0.5	Pass
173	5865	17.39	0.5	Pass
177	5885	17.66	0.5	Pass

802.11be (EHT40) 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
167	5835	35.07	0.5	Pass
175	5875	35.78	0.5	Pass

802.11be (EHT80) 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
171	5855	70.1	0.5	Pass

802.11be (EHT160) 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
163	5815	147.69	0.5	Pass

802.11be (EHT20) 26-tone RU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	2.08	0.5	Pass
173	5865	2.09	0.5	Pass
177	5885	2.12	0.5	Pass

802.11be (EHT20) 52-tone RU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	17.04	0.5	Pass
173	5865	17.05	0.5	Pass
177	5885	15.76	0.5	Pass

802.11be (EHT20) 106-tone RU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	17.13	0.5	Pass
173	5865	17.12	0.5	Pass
177	5885	17.13	0.5	Pass

802.11be (EHT20) 52+26-tone MRU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	15.11	0.5	Pass
173	5865	15.13	0.5	Pass
177	5885	15.14	0.5	Pass

802.11be (EHT20) 106+26-tone MRU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	16.99	0.5	Pass
173	5865	17.01	0.5	Pass
177	5885	16.94	0.5	Pass

802.11be (EHT80) 484+242-tone MRU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
171	5855	57.28	0.5	Pass





802.11be (EHT160) 996+484-tone MRU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
163	5815	115.07	0.5	Pass


802.11be (EHT160) 996+484+242-tone MRU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
163	5815	133.97	0.5	Pass


Spectrum Plot of Minimum Value

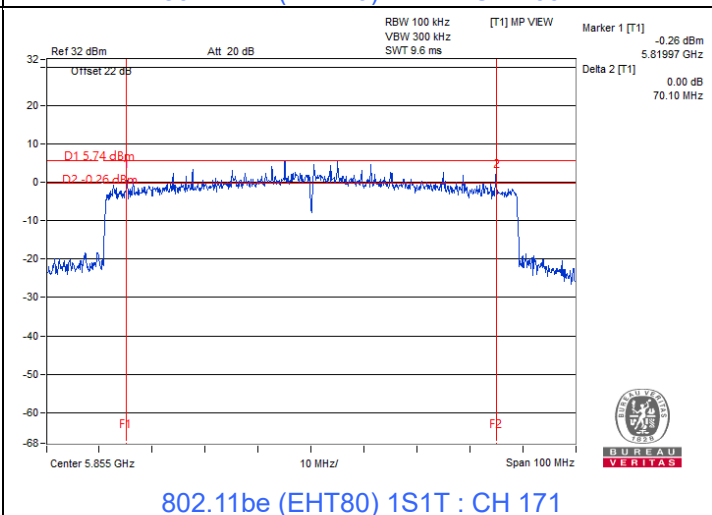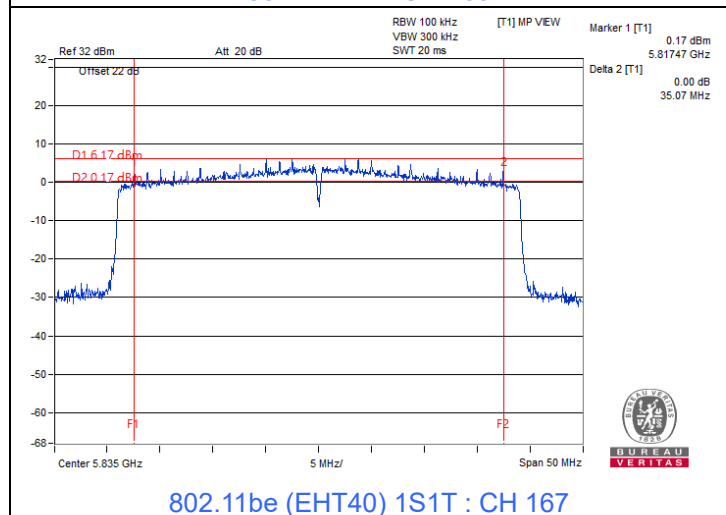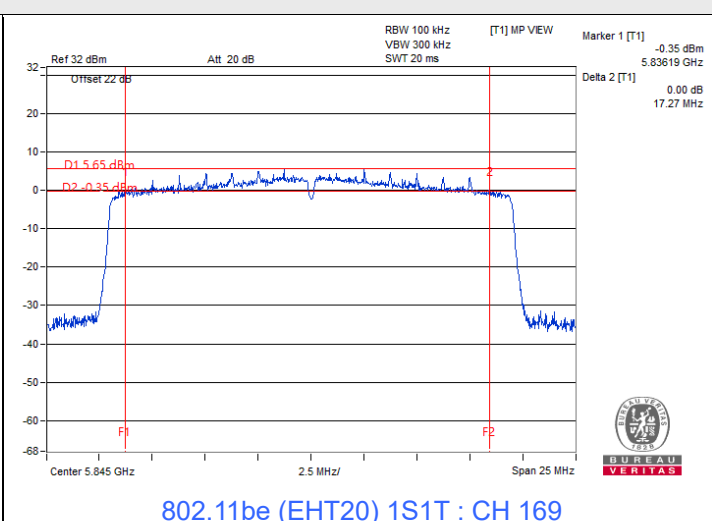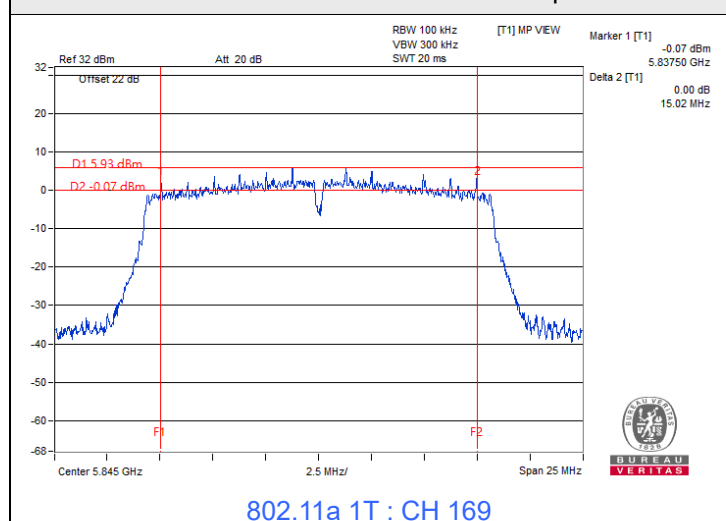


Spectrum Plot of Minimum Value

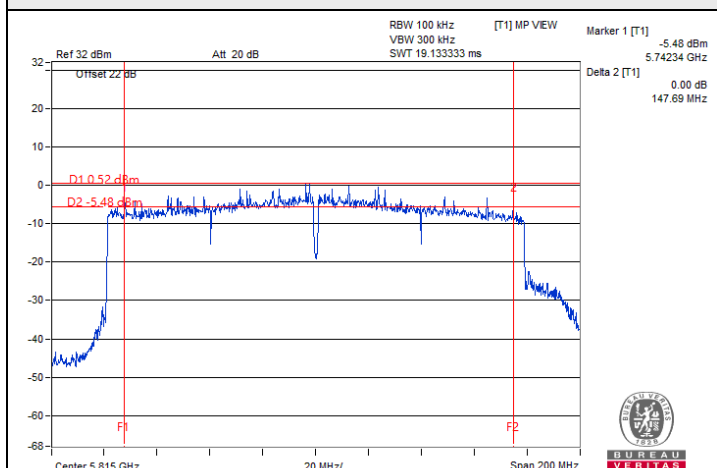


802.11be (EHT160) 1S1T : CH 163

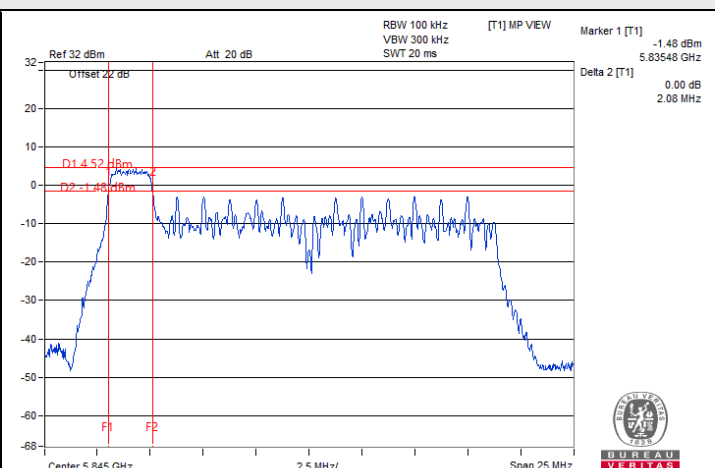


802.11be (EHT20) 26-tone RU 1S1T : CH 169

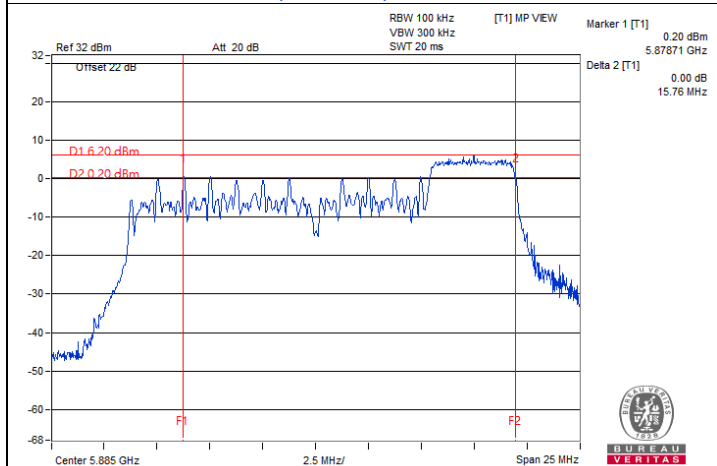


802.11be (EHT20) 52-tone RU 1S1T : CH 177

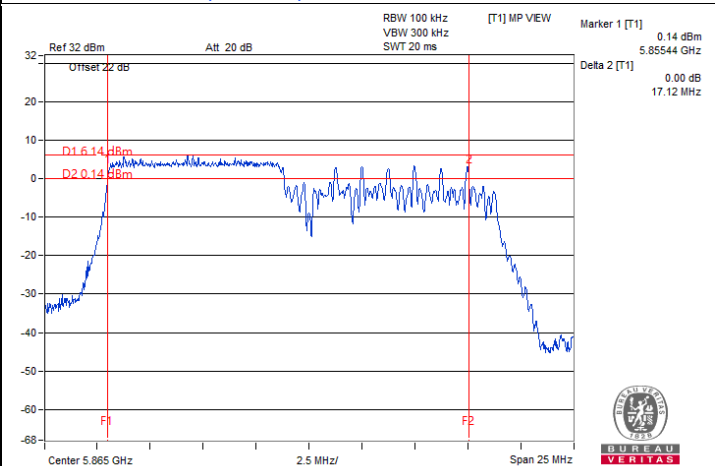

802.11be (EHT20) 106-tone RU 1S1T : CH 173

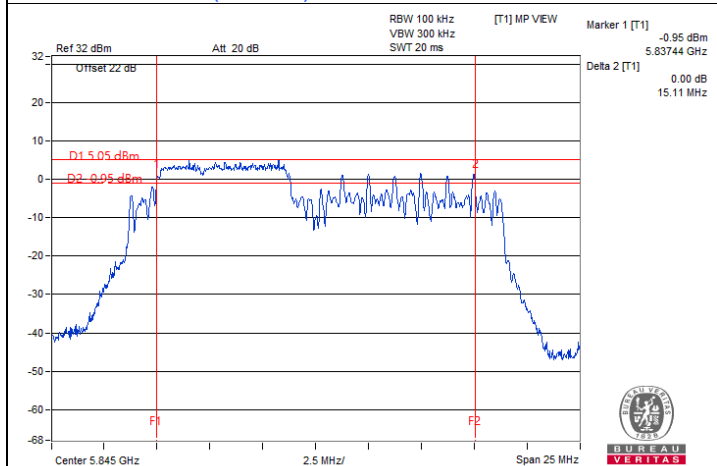


802.11be (EHT20) 52+26-tone MRU 1S1T : CH 169

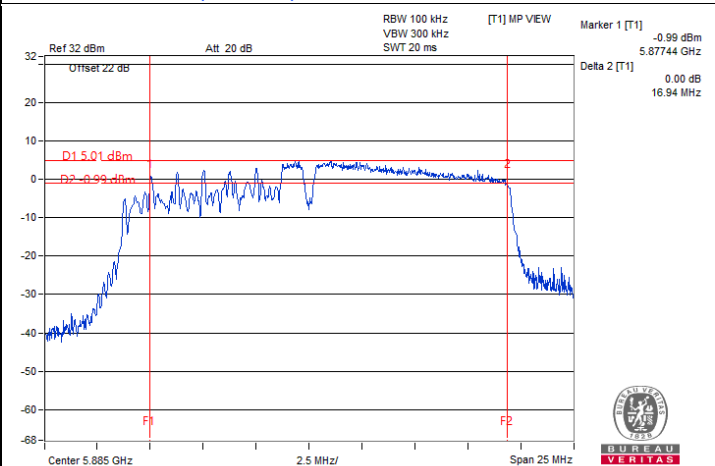


802.11be (EHT20) 106+26-tone MRU 1S1T : CH 177


Spectrum Plot of Minimum Value

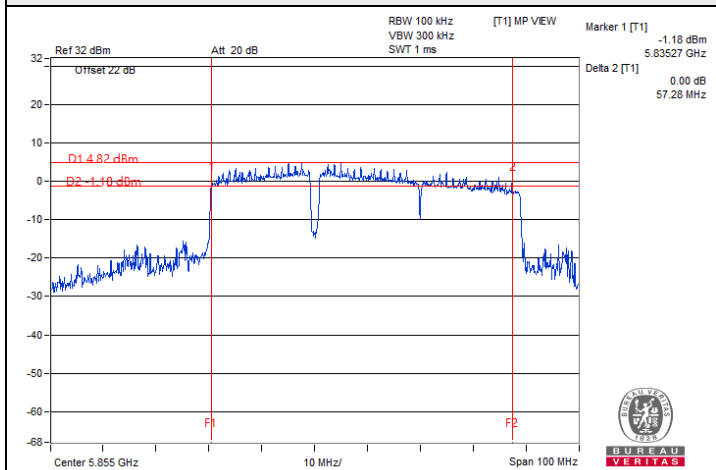

802.11be (EHT80) 484+242-tone MRU 1S1T : CH 171

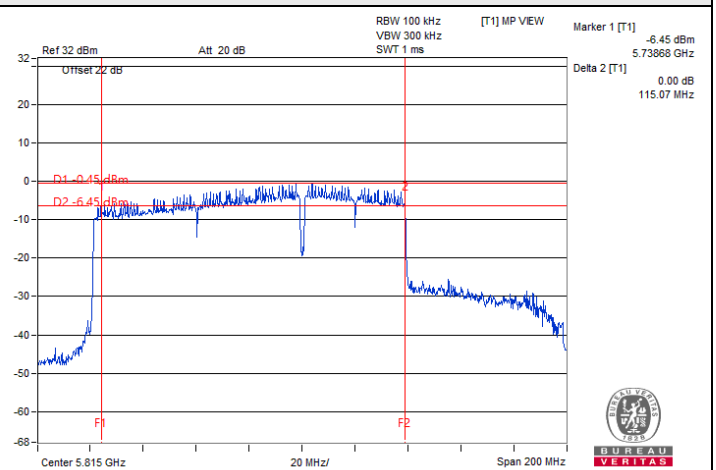

802.11be (EHT160) 996+484-tone MRU 1S1T : CH 163

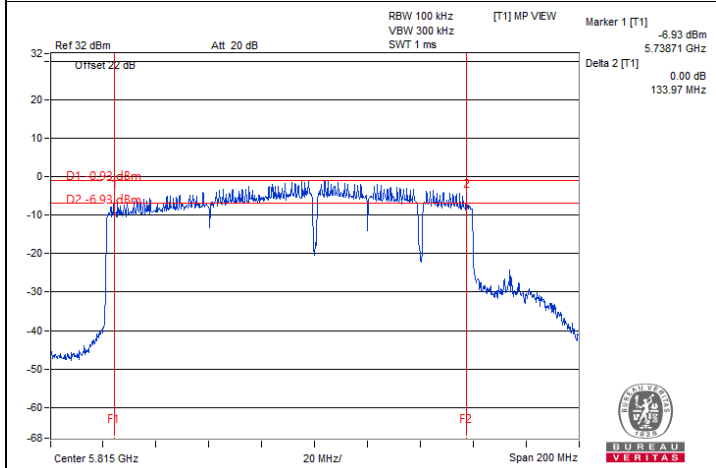

802.11be (EHT160) 996+484+242-tone MRU 1S1T : CH 163

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 65% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------

802.11a 2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	15.11	15.69	0.5	Pass
173	5865	15.31	15.14	0.5	Pass
177	5885	15.12	15.08	0.5	Pass

802.11be (EHT20) 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	17.56	18.01	0.5	Pass
173	5865	17.80	17.56	0.5	Pass
177	5885	17.67	17.90	0.5	Pass

802.11be (EHT40) 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
167	5835	35.11	35.11	0.5	Pass
175	5875	35.08	35.11	0.5	Pass

802.11be (EHT80) 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
171	5855	75.03	75.22	0.5	Pass

802.11be (EHT160) 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
163	5815	152.69	150.21	0.5	Pass

802.11be (EHT20) 26-tone RU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	2.09	2.07	0.5	Pass
173	5865	2.09	2.06	0.5	Pass
177	5885	2.08	2.10	0.5	Pass

802.11be (EHT20) 52-tone RU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	17.00	17.03	0.5	Pass
173	5865	17.04	17.05	0.5	Pass
177	5885	17.00	17.05	0.5	Pass

802.11be (EHT20) 106-tone RU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	17.15	17.15	0.5	Pass
173	5865	17.15	17.14	0.5	Pass
177	5885	17.13	17.13	0.5	Pass

802.11be (EHT20) 52+26-tone MRU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	15.14	15.12	0.5	Pass
173	5865	15.14	15.12	0.5	Pass
177	5885	15.13	15.12	0.5	Pass

802.11be (EHT20) 106+26-tone MRU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	16.71	17.07	0.5	Pass
173	5865	16.71	16.88	0.5	Pass
177	5885	16.82	16.97	0.5	Pass

802.11be (EHT80) 484+242-tone MRU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
171	5855	57.24	56.89	0.5	Pass



802.11be (EHT160) 996+484-tone MRU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
163	5815	115.98	113.88	0.5	Pass







802.11be (EHT160) 996+484+242-tone MRU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
163	5815	135.32	135.30	0.5	Pass


Spectrum Plot of Minimum Value

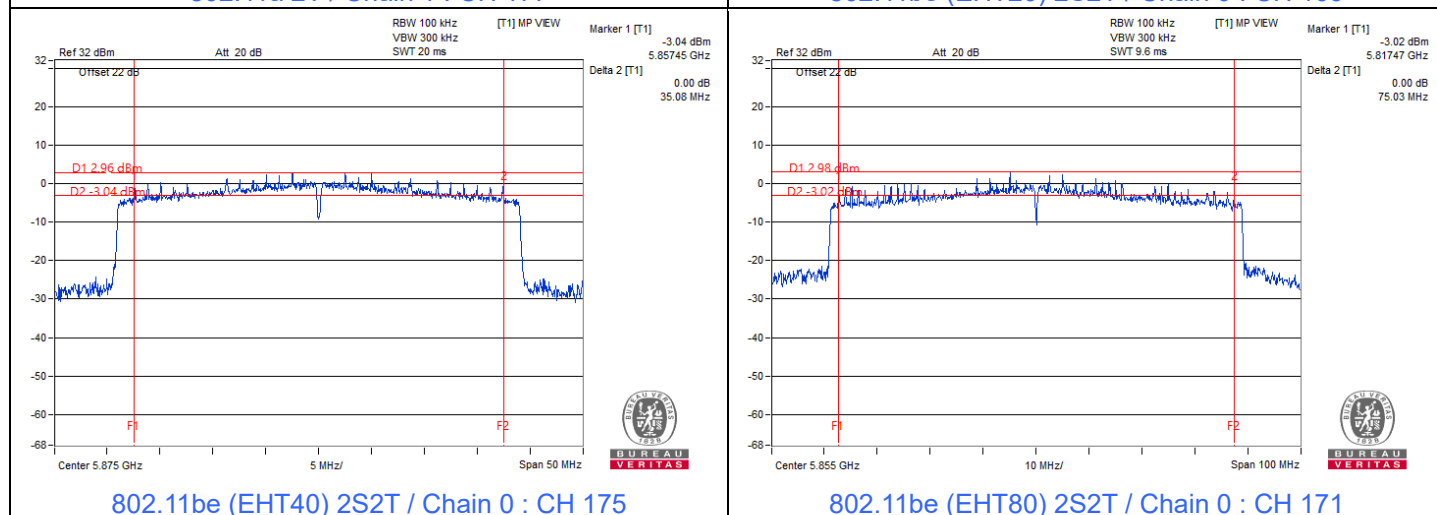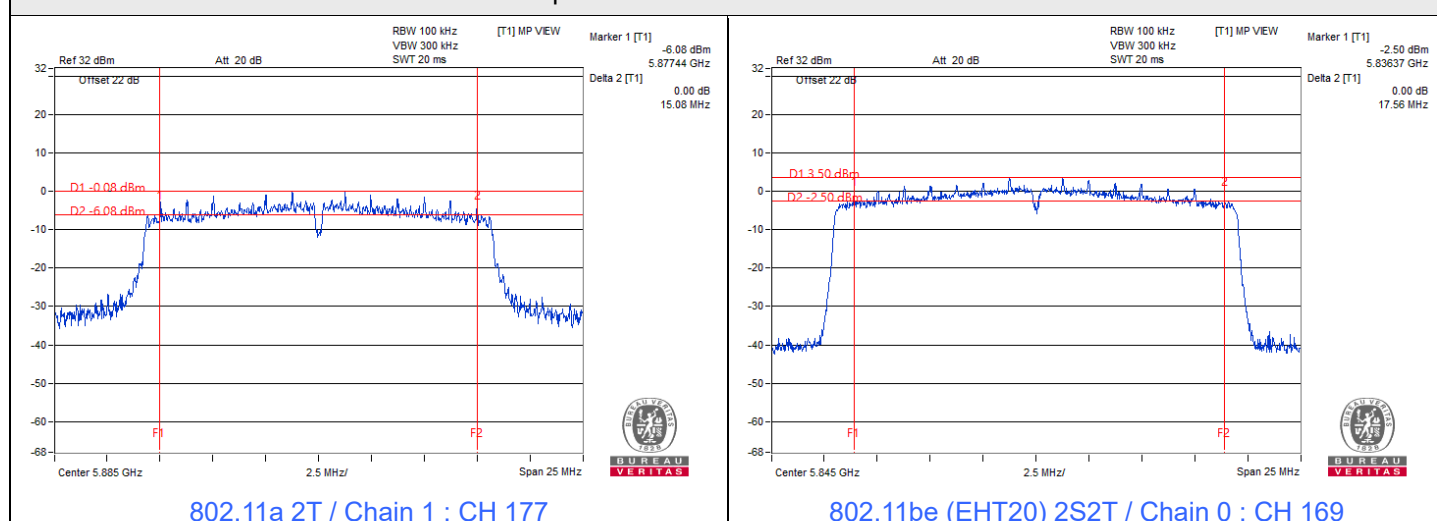


Spectrum Plot of Minimum Value

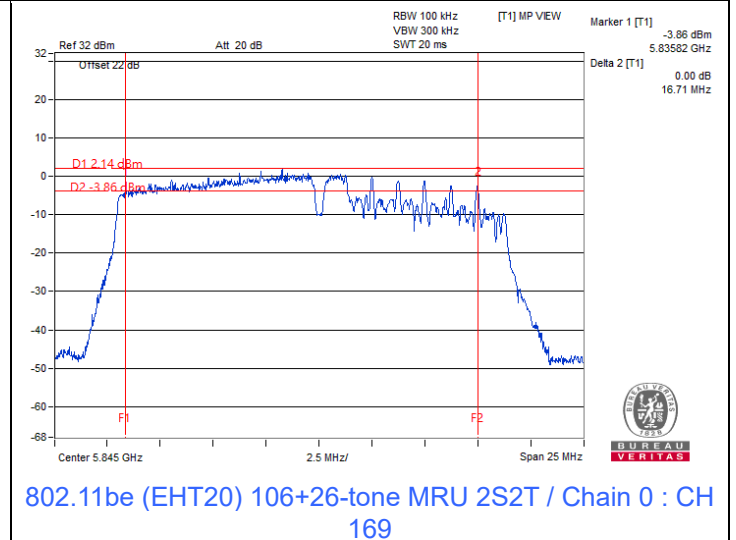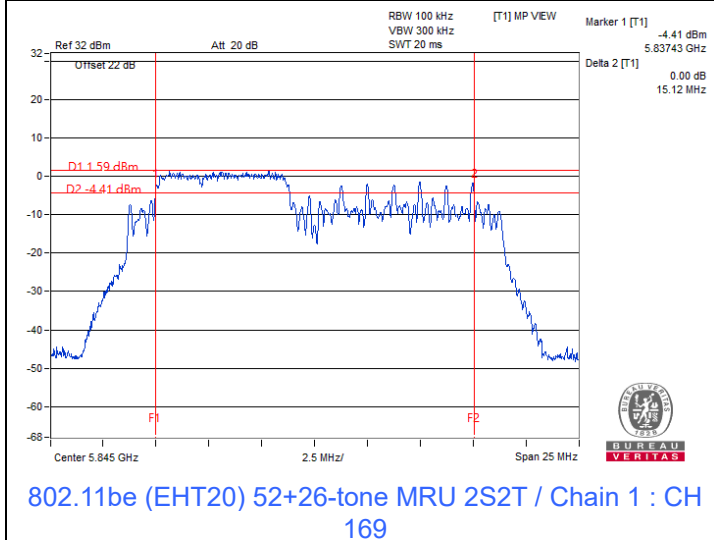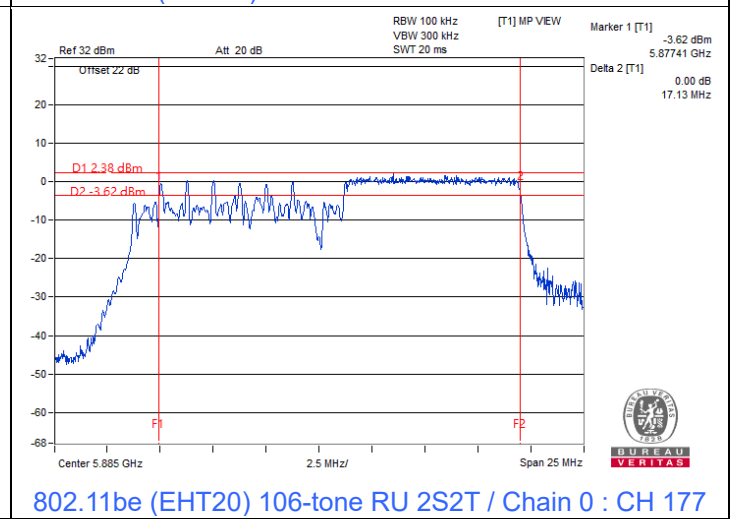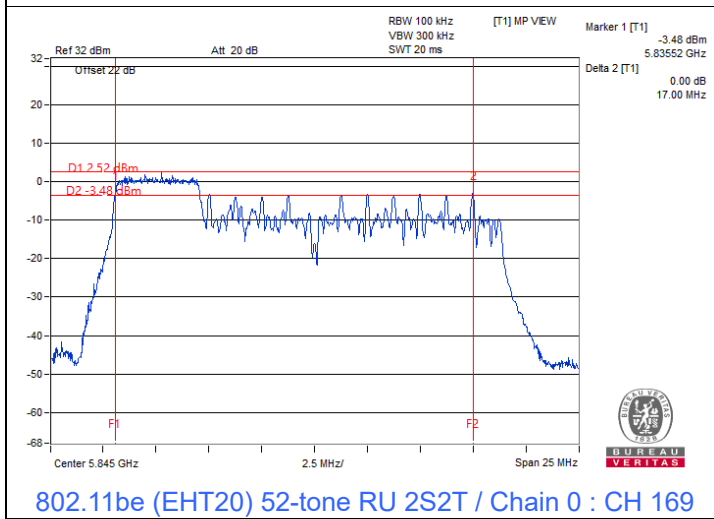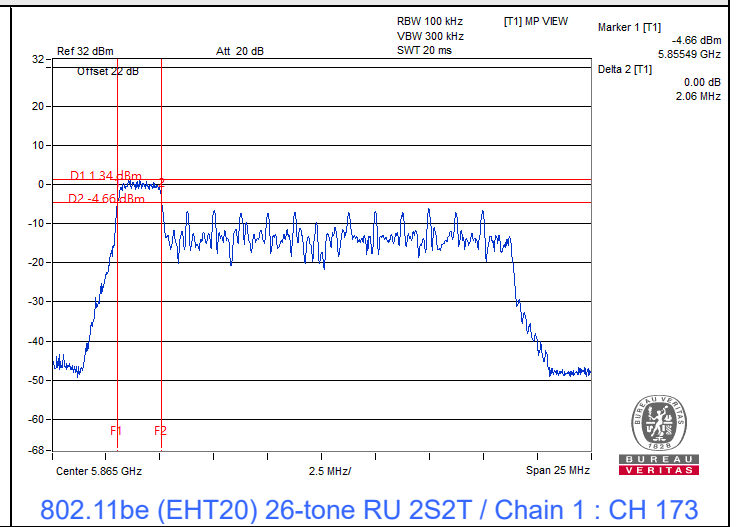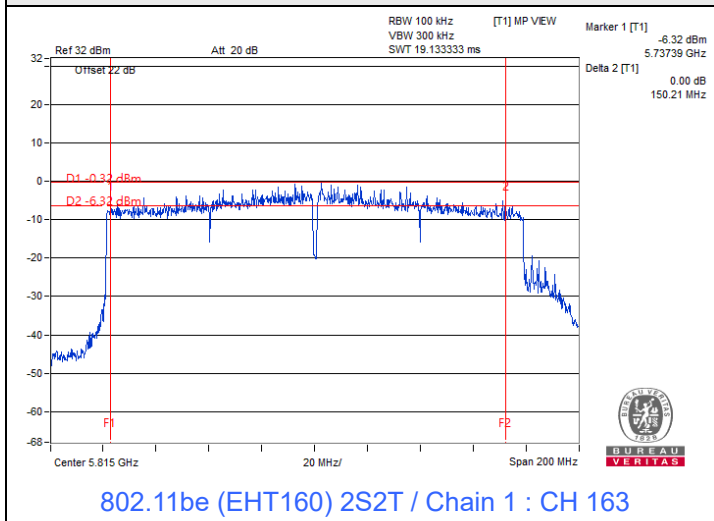


Spectrum Plot of Minimum Value

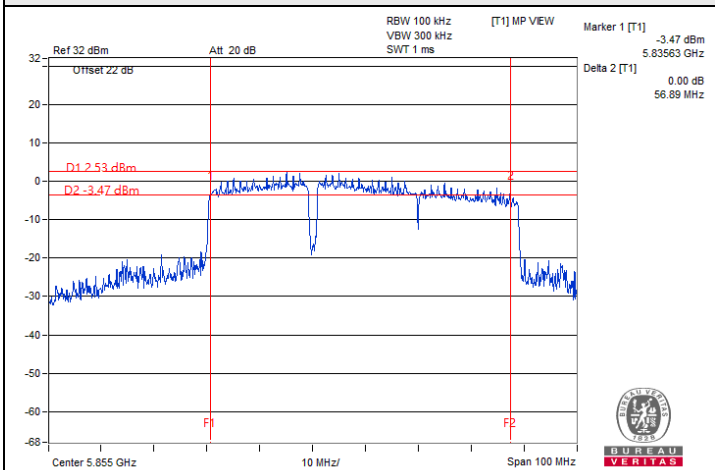

802.11be (EHT80) 484+242-tone MRU 2S2T / Chain 1 : CH 171

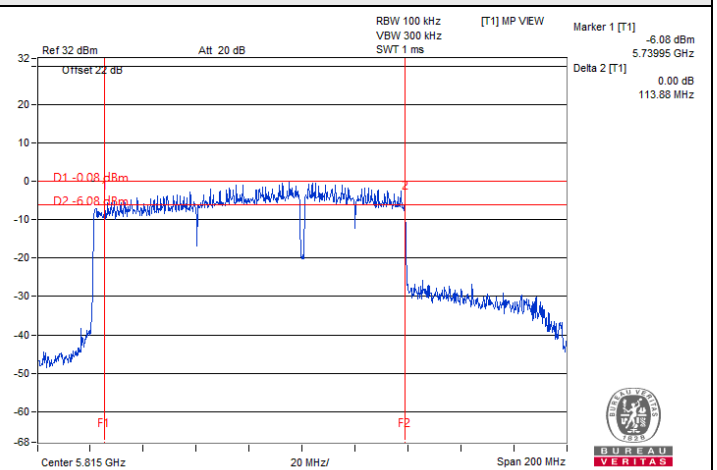

802.11be (EHT160) 996+484-tone MRU 2S2T / Chain 1 : CH 163

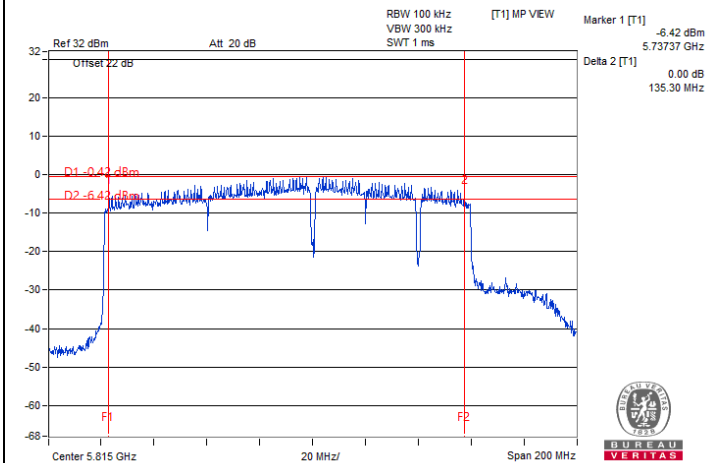

802.11be (EHT160) 996+484+242-tone MRU 2S2T / Chain 1 : CH 163

7.4 AC Power Conducted Emissions

Mode C


1TX

RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 62 % RH
Tested By	Willy Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.02	46.12	28.86	56.14	38.88	65.79	55.79	-9.65	-16.91
2	0.26719	10.02	29.72	12.77	39.74	22.79	61.20	51.20	-21.46	-28.41
3	0.47813	10.03	26.75	17.15	36.78	27.18	56.37	46.37	-19.59	-19.19
4	0.96641	10.06	16.35	9.23	26.41	19.29	56.00	46.00	-29.59	-26.71
5	7.77344	10.39	13.41	7.86	23.80	18.25	60.00	50.00	-36.20	-31.75
6	17.53516	10.92	19.70	16.56	30.62	27.48	60.00	50.00	-29.38	-22.52

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

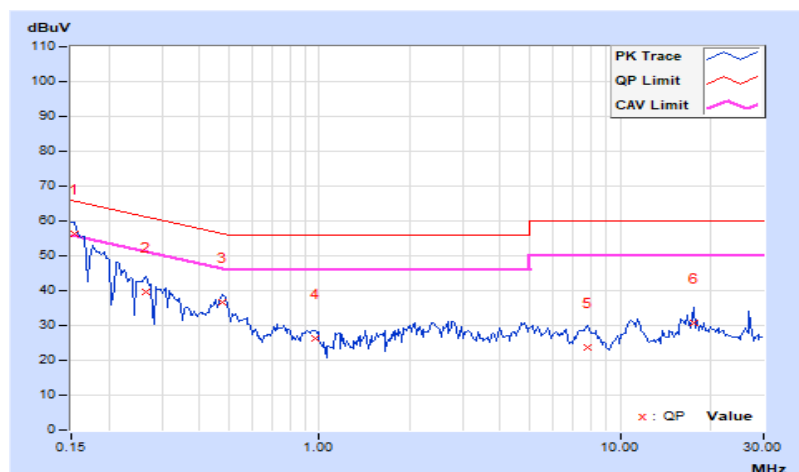


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 62 % RH
Tested By	Willy Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.00	46.96	32.97	56.96	42.97	66.00	56.00	-9.04	-13.03
2	0.22422	10.01	34.21	18.88	44.22	28.89	62.66	52.66	-18.44	-23.77
3	0.45078	10.01	23.74	13.20	33.75	23.21	56.86	46.86	-23.11	-23.65
4	3.41406	10.13	18.10	7.76	28.23	17.89	56.00	46.00	-27.77	-28.11
5	7.32813	10.30	12.46	5.87	22.76	16.17	60.00	50.00	-37.24	-33.83
6	16.74219	10.66	16.09	9.76	26.75	20.42	60.00	50.00	-33.25	-29.58

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

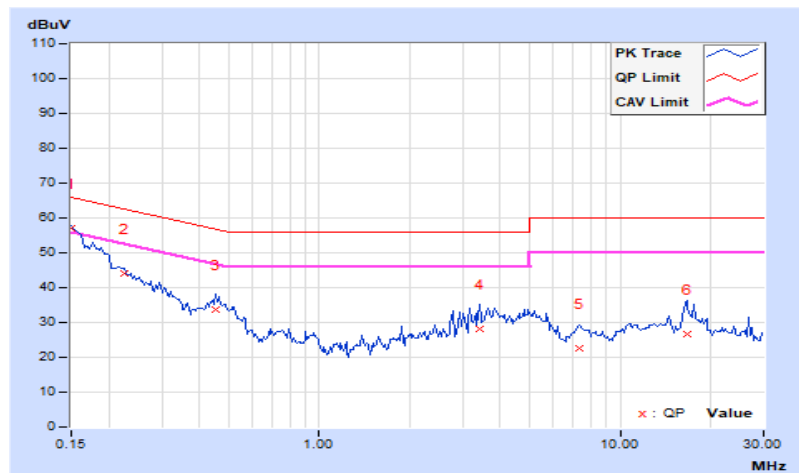


2TX

RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 62 % RH
Tested By	Willy Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.01	46.94	29.79	56.95	39.80	66.00	56.00	-9.05	-16.20
2	0.23984	10.02	31.65	14.14	41.67	24.16	62.10	52.10	-20.43	-27.94
3	0.48594	10.03	26.77	15.11	36.80	25.14	56.24	46.24	-19.44	-21.10
4	0.91953	10.05	13.95	5.59	24.00	15.64	56.00	46.00	-32.00	-30.36
5	5.67188	10.29	14.38	7.94	24.67	18.23	60.00	50.00	-35.33	-31.77
6	16.01563	10.85	19.41	16.36	30.26	27.21	60.00	50.00	-29.74	-22.79

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

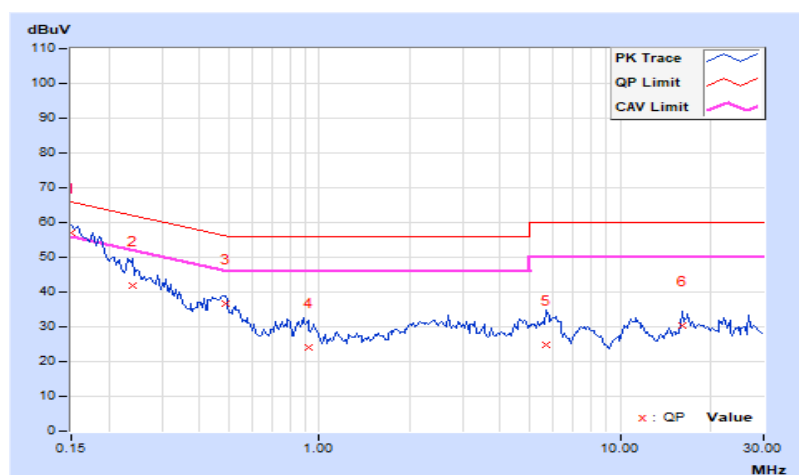


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 62 % RH
Tested By	Willy Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.00	46.14	29.79	56.14	39.79	66.00	56.00	-9.86	-16.21
2	0.27891	10.01	27.68	9.98	37.69	19.99	60.85	50.85	-23.16	-30.86
3	0.49375	10.01	22.86	10.36	32.87	20.37	56.10	46.10	-23.23	-25.73
4	0.95469	10.04	12.28	5.40	22.32	15.44	56.00	46.00	-33.68	-30.56
5	4.99219	10.20	18.37	11.75	28.57	21.95	56.00	46.00	-27.43	-24.05
6	16.64844	10.66	17.30	8.06	27.96	18.72	60.00	50.00	-32.04	-31.28

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

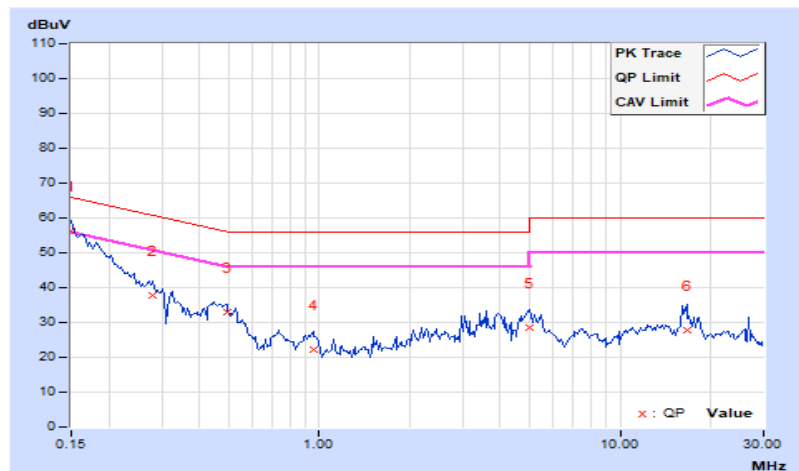

7.5 Unwanted Emissions below 1 GHz


Mode A 1TX

RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	50.01	36.95 PK	40	-3.05	-71.38	13.07	-58.31
2	206.3	36.84 PK	43.5	-6.66	-71.49	13.07	-58.42
3	240.13	37.37 PK	46	-8.63	-70.96	13.07	-57.89
4	519.61	37.38 PK	46	-8.62	-70.95	13.07	-57.88
5	716.64	39.11 PK	46	-6.89	-69.22	13.07	-56.15
6	892.82	39.03 PK	46	-6.97	-69.3	13.07	-56.23

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

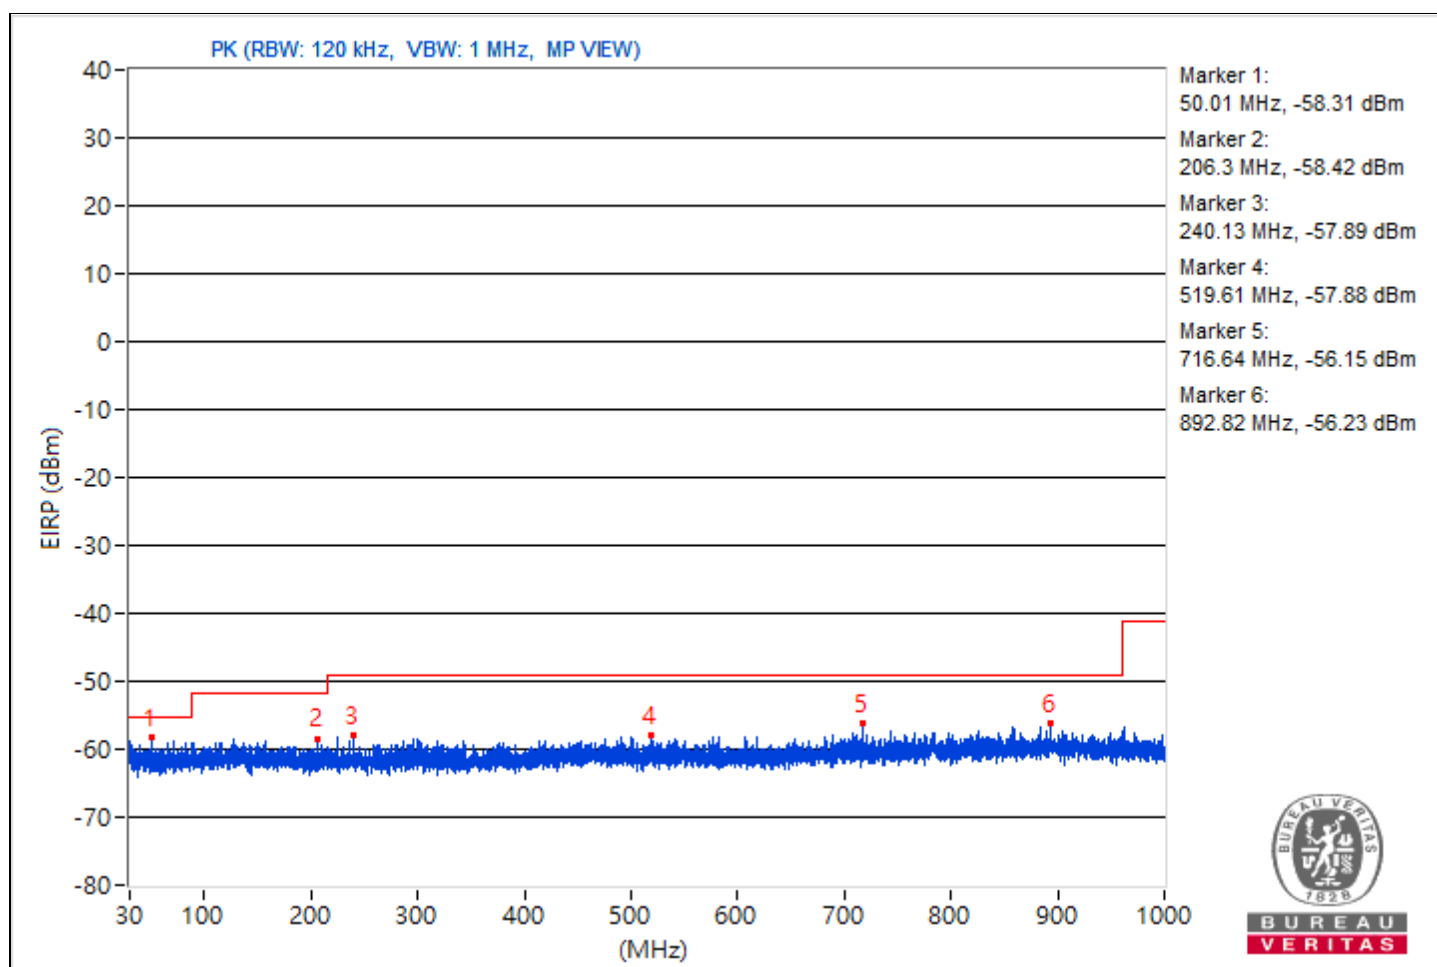


2TX

RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	43.58	38.04 PK	40	-1.96	-75.1	-72.03	13.07	-57.22
2	147.37	38.95 PK	43.5	-4.55	-70.88	-74.74	13.07	-56.31
3	250.43	38.9 PK	46	-7.1	-74.77	-70.93	13.07	-56.36
4	494.87	39.69 PK	46	-6.31	-70.23	-73.79	13.07	-55.57
5	789.75	40.17 PK	46	-5.83	-70.28	-72.28	13.07	-55.09
6	985.45	40.02 PK	54	-13.98	-73.6	-69.83	13.07	-55.24

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

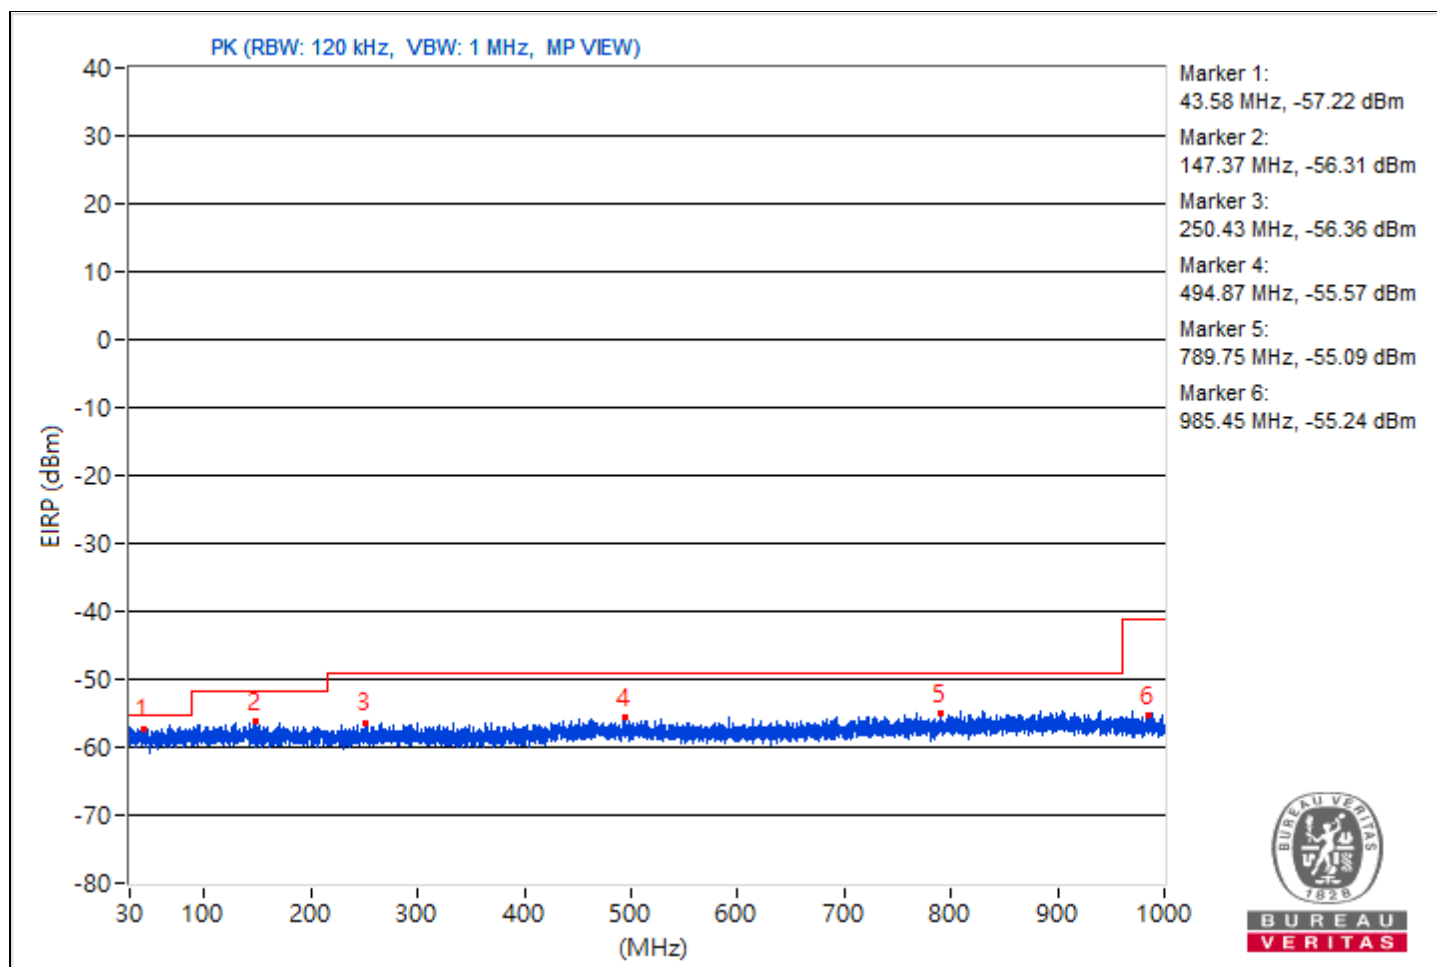


Mode B
1TX

RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	104.30	24.4 QP	43.5	-19.1	1.50 H	298	45.4	-21.0
2	239.05	36.4 QP	46.0	-9.6	1.00 H	250	55.5	-19.1
3	303.21	38.6 QP	46.0	-7.4	1.00 H	296	55.3	-16.7
4	438.44	40.7 QP	46.0	-5.3	2.00 H	278	53.9	-13.2
5	695.89	44.4 QP	46.0	-1.6	1.50 H	258	52.2	-7.8
6	908.29	41.9 QP	46.0	-4.1	1.00 H	227	46.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

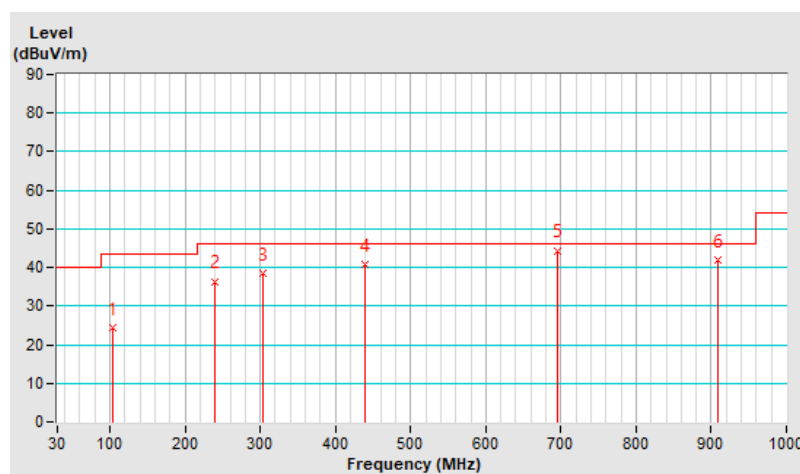


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.54	29.0 QP	40.0	-11.0	1.50 V	242	42.8	-13.8
2	111.45	34.1 QP	43.5	-9.4	1.50 V	360	49.6	-15.5
3	219.86	40.1 QP	46.0	-5.9	2.00 V	183	56.6	-16.5
4	247.55	29.4 QP	46.0	-16.6	1.50 V	50	43.6	-14.2
5	286.62	38.3 QP	46.0	-7.7	2.00 V	284	51.1	-12.8
6	693.23	34.3 QP	46.0	-11.7	2.00 V	51	37.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

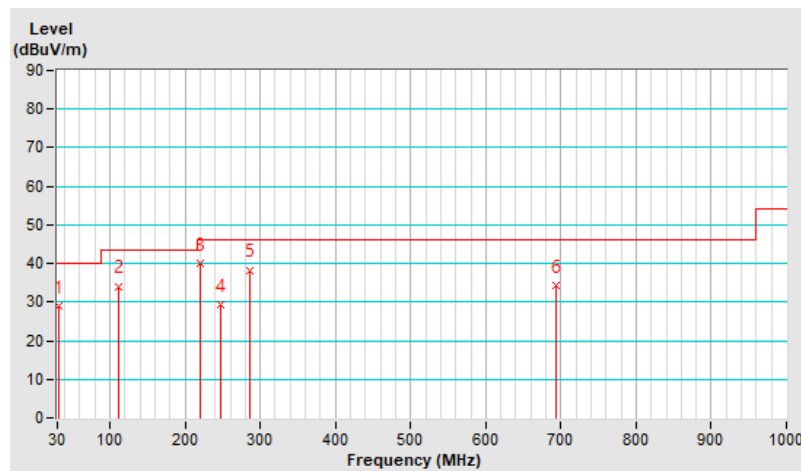


2TX

RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	104.00	30.2 QP	43.5	-13.3	2.00 H	324	46.5	-16.3
2	239.30	34.5 QP	46.0	-11.5	3.00 H	257	49.0	-14.5
3	303.81	41.2 QP	46.0	-4.8	3.00 H	278	53.4	-12.2
4	436.82	29.2 QP	46.0	-16.8	1.50 H	335	37.8	-8.6
5	695.75	39.7 QP	46.0	-6.3	1.50 H	241	43.2	-3.5
6	903.33	33.0 QP	46.0	-13.0	1.00 H	271	33.1	-0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

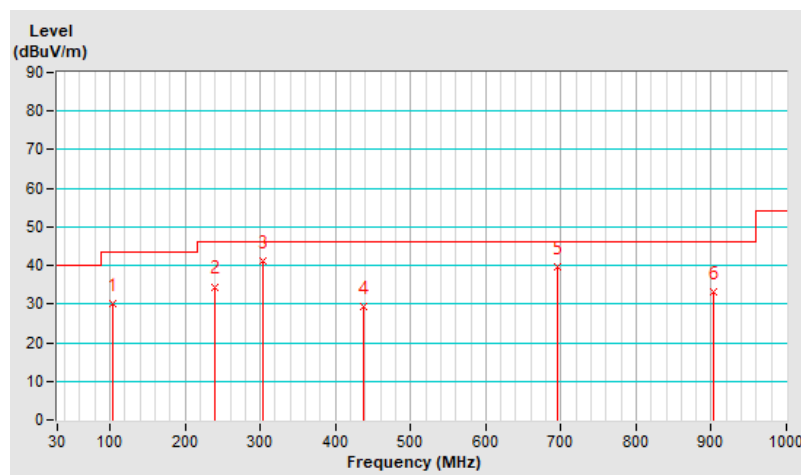


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.94	23.6 QP	40.0	-16.4	1.50 V	263	37.4	-13.8
2	110.30	35.8 QP	43.5	-7.7	2.00 V	299	51.4	-15.6
3	222.08	37.8 QP	46.0	-8.2	2.00 V	168	54.3	-16.5
4	248.77	42.5 QP	46.0	-3.5	1.50 V	10	56.6	-14.1
5	286.78	43.5 QP	46.0	-2.5	1.50 V	242	56.2	-12.7
6	693.85	42.6 QP	46.0	-3.4	1.00 V	3	46.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

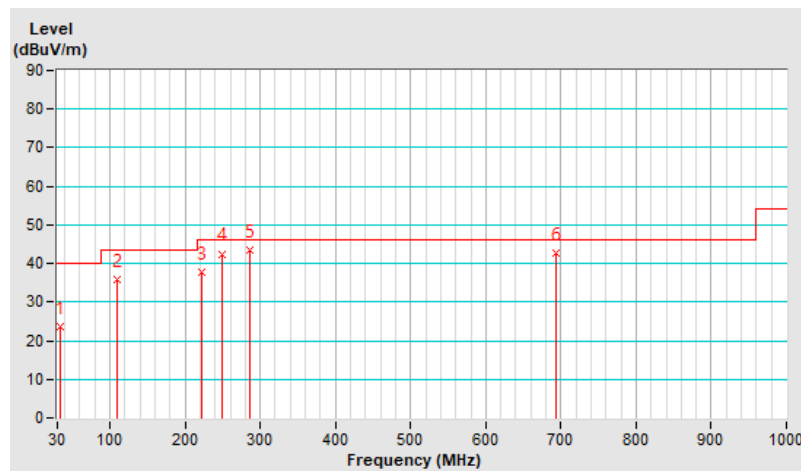

7.6 Unwanted Emissions above 1 GHz

Mode A


1TX


Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.08	54.65 PK	74	-19.35	-48.98	8.37	-40.61
2	3807.08	47.79 AV	54	-6.21	-55.84	8.37	-47.47
3	10668	53.35 PK	74	-20.65	-50.28	8.37	-41.91
4	10668	46.18 AV	54	-7.82	-57.45	8.37	-49.08
5	19272.3	56.09 PK	74	-17.91	-47.54	8.37	-39.17
6	19272.3	48.42 AV	54	-5.58	-55.21	8.37	-46.84
7	23687	56.53 PK	74	-17.47	-47.1	8.37	-38.73
8	23687	49.96 AV	54	-4.04	-53.67	8.37	-45.3
9	38804.62	51.23 PK	74	-22.77	-52.4	8.37	-44.03
10	38804.62	43.45 AV	54	-10.55	-60.18	8.37	-51.81

Note: Margin value = Emission Level - Limit value

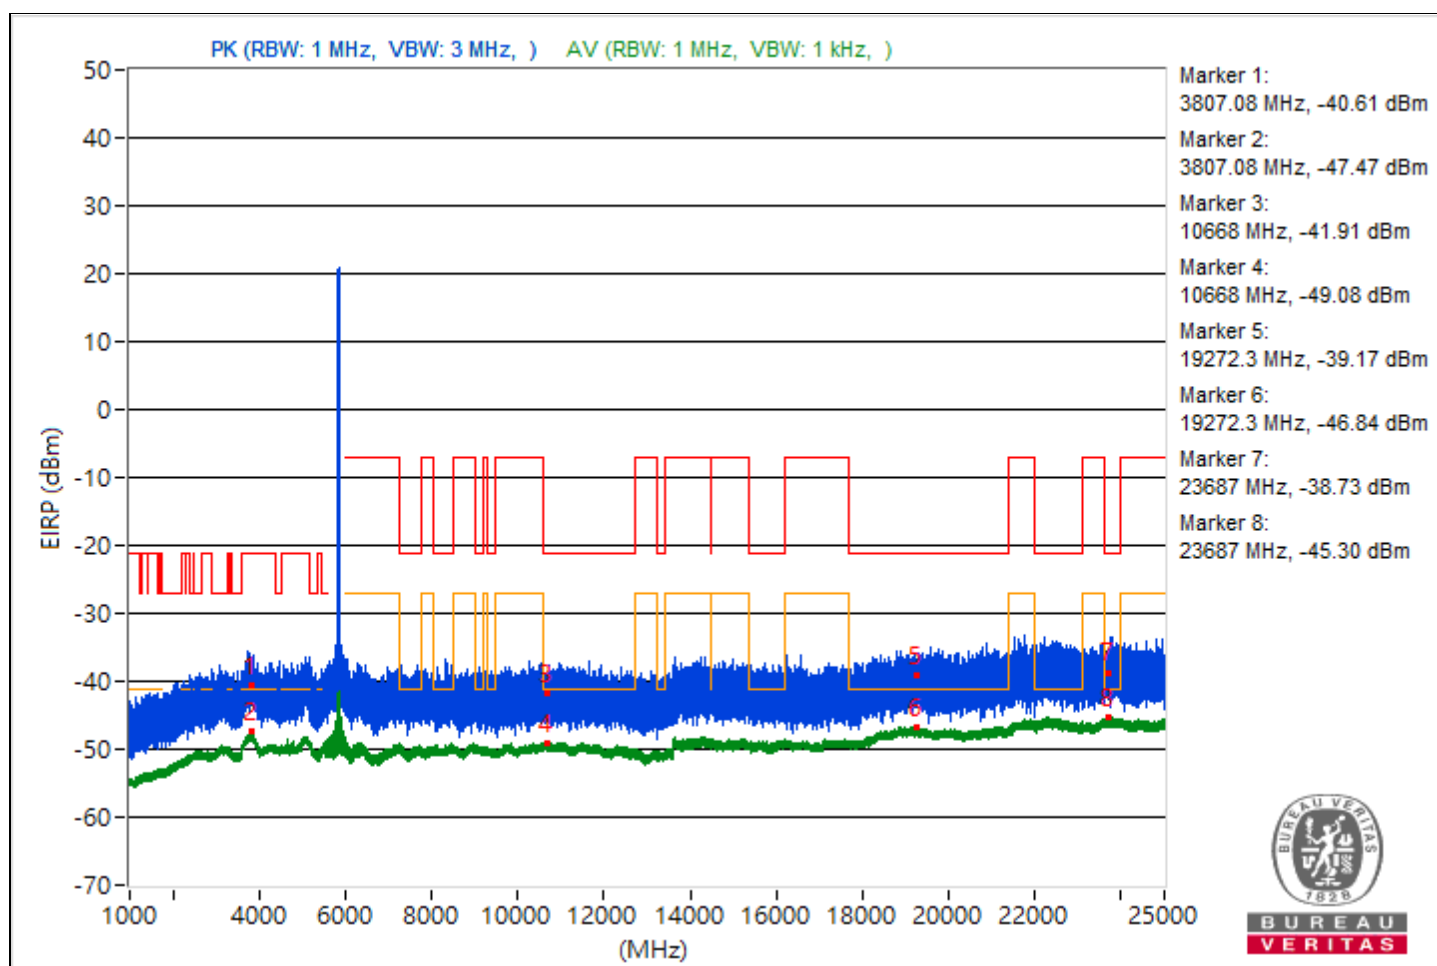


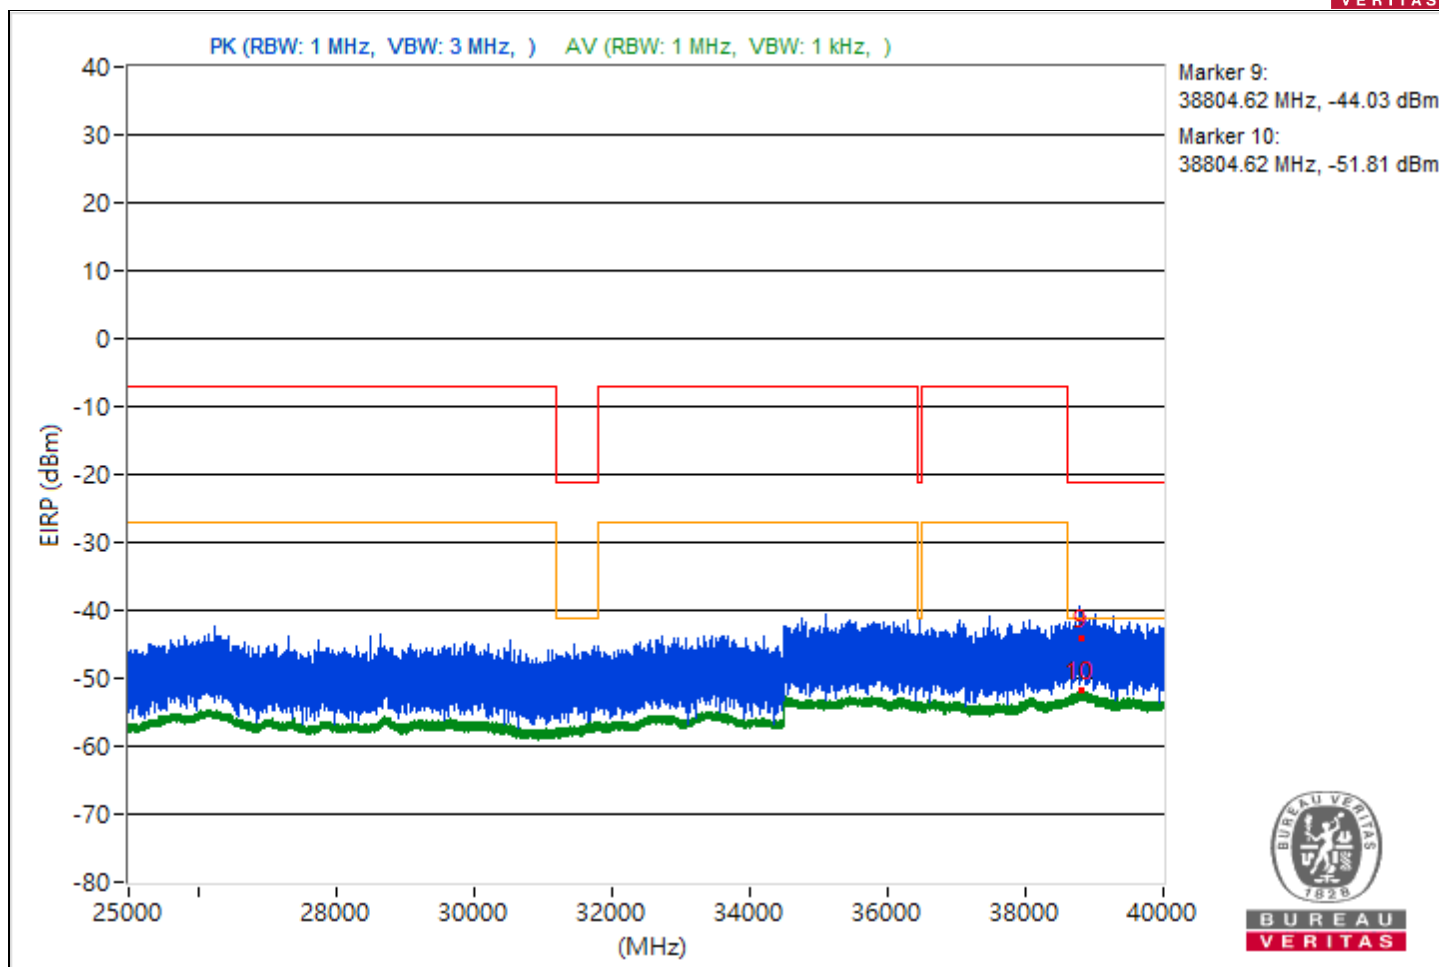


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.08	54.54 PK	74	-19.46	-49.09	8.37	-40.72
2	3786.08	47.69 AV	54	-6.31	-55.94	8.37	-47.57
3	10720.53	54.93 PK	74	-19.07	-48.7	8.37	-40.33
4	10720.53	46.24 AV	54	-7.76	-57.39	8.37	-49.02
5	19285.5	55.93 PK	74	-18.07	-47.7	8.37	-39.33
6	19285.5	48.38 AV	54	-5.62	-55.25	8.37	-46.88
7	23865.6	58.87 PK	74	-15.13	-44.76	8.37	-36.39
8	23865.6	49.9 AV	54	-4.1	-53.73	8.37	-45.36
9	38836.44	51.96 PK	74	-22.04	-51.67	8.37	-43.3
10	38836.44	43.34 AV	54	-10.66	-60.29	8.37	-51.92

Note: Margin value = Emission Level - Limit value

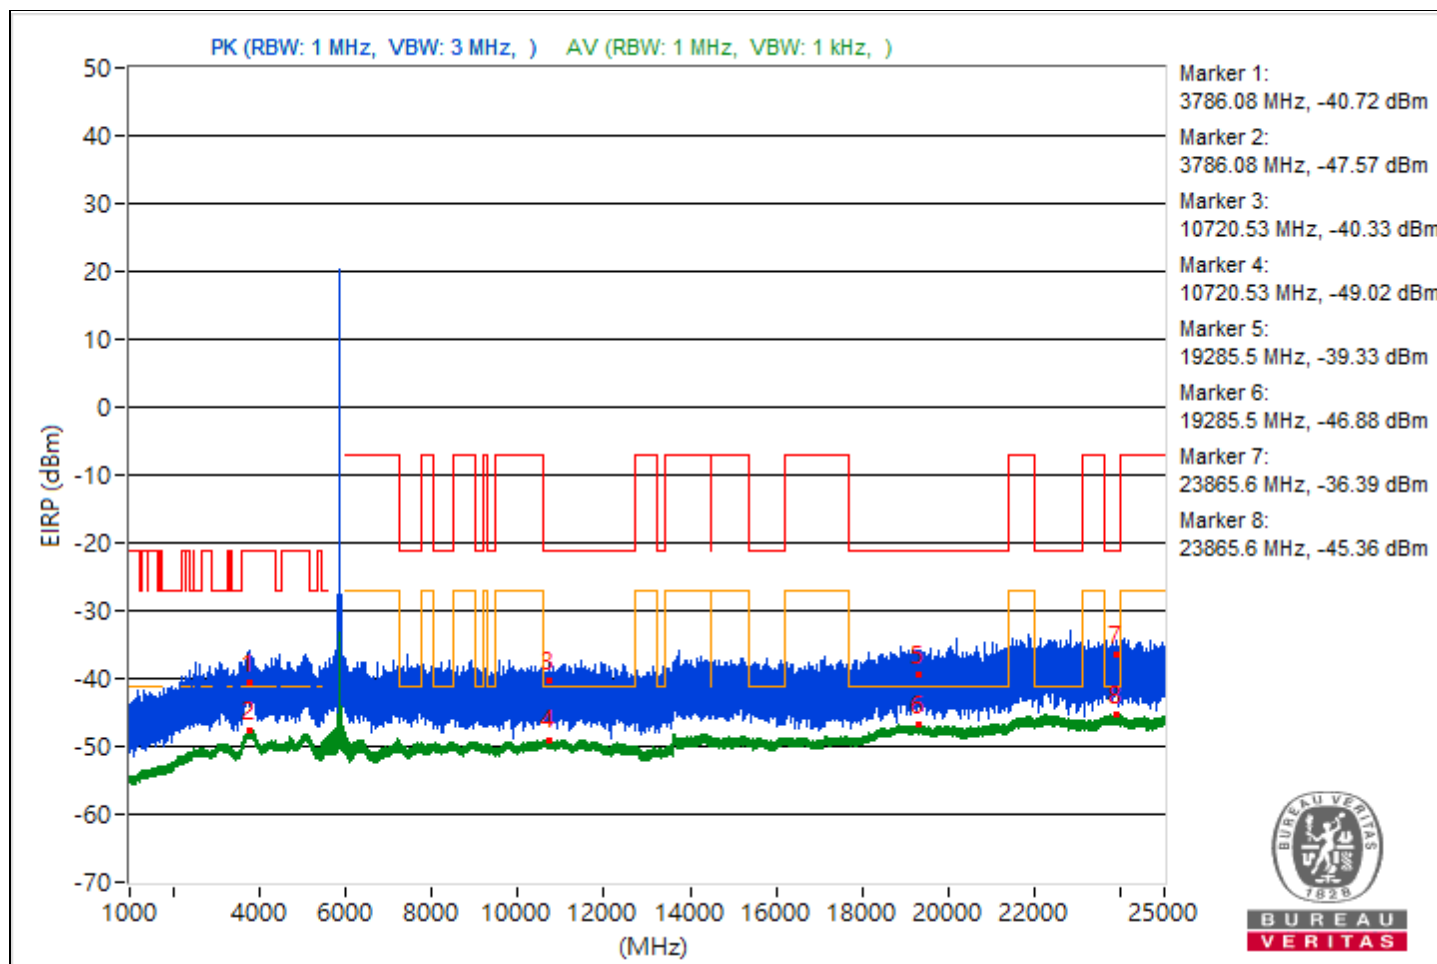


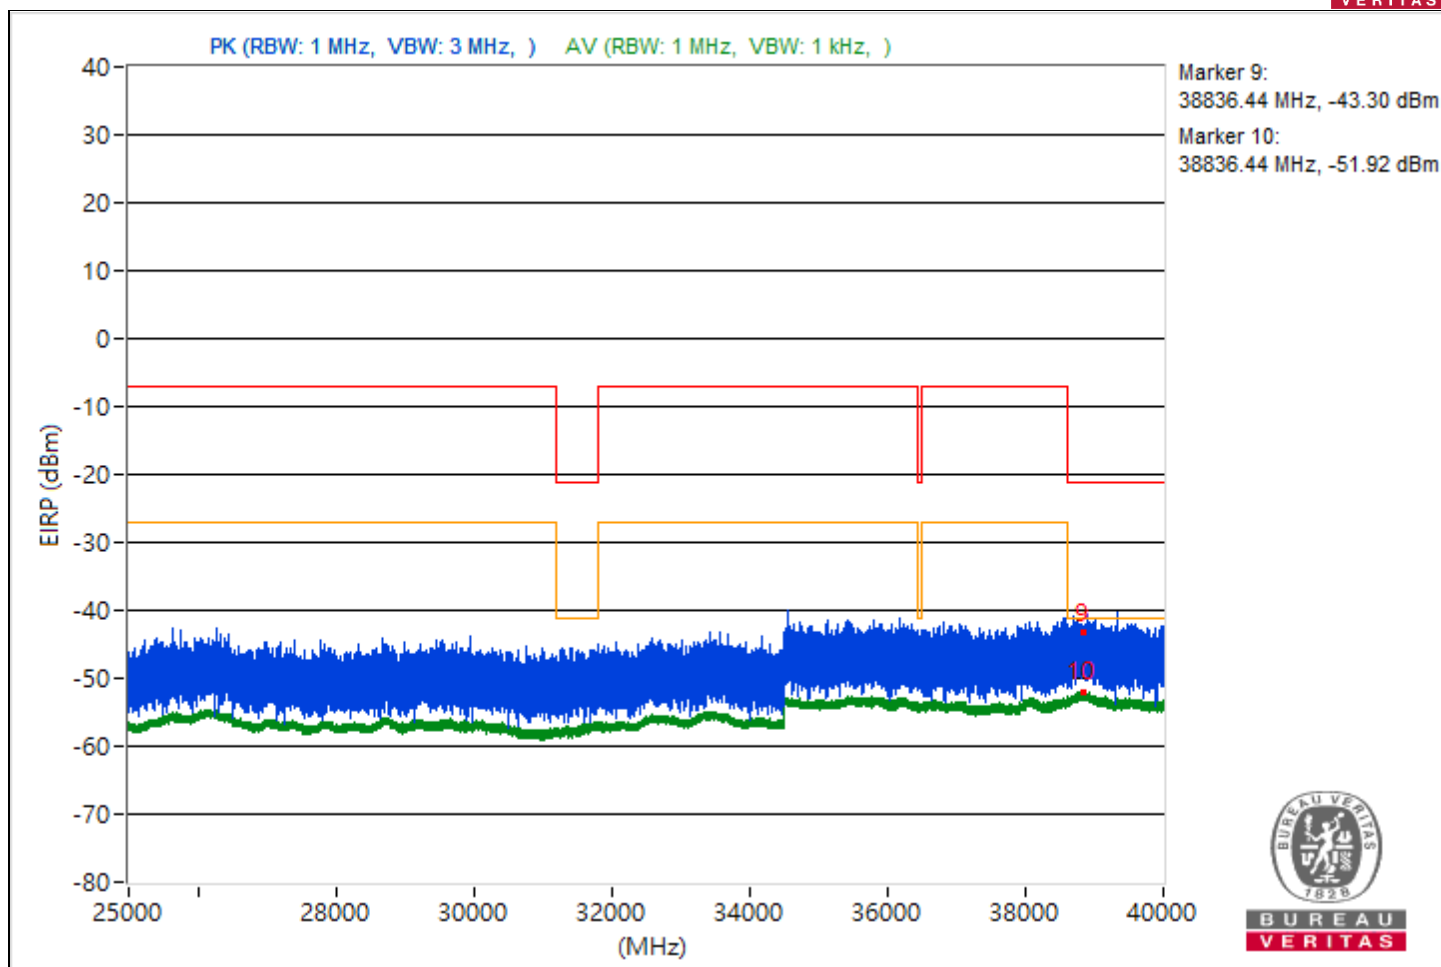


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.67	54.96 PK	74	-19.04	-48.67	8.37	-40.3
2	3797.67	47.76 AV	54	-6.24	-55.87	8.37	-47.5
3	10720.53	53.27 PK	74	-20.73	-50.36	8.37	-41.99
4	10720.53	46.26 AV	54	-7.74	-57.37	8.37	-49
5	18908.6	55.01 PK	74	-18.99	-48.62	8.37	-40.25
6	18908.6	48.43 AV	54	-5.57	-55.2	8.37	-46.83
7	23734	57.63 PK	74	-16.37	-46	8.37	-37.63
8	23734	49.86 AV	54	-4.14	-53.77	8.37	-45.4
9	38828.09	50.3 PK	74	-23.7	-53.33	8.37	-44.96
10	38828.09	43.27 AV	54	-10.73	-60.36	8.37	-51.99

Note: Margin value = Emission Level - Limit value

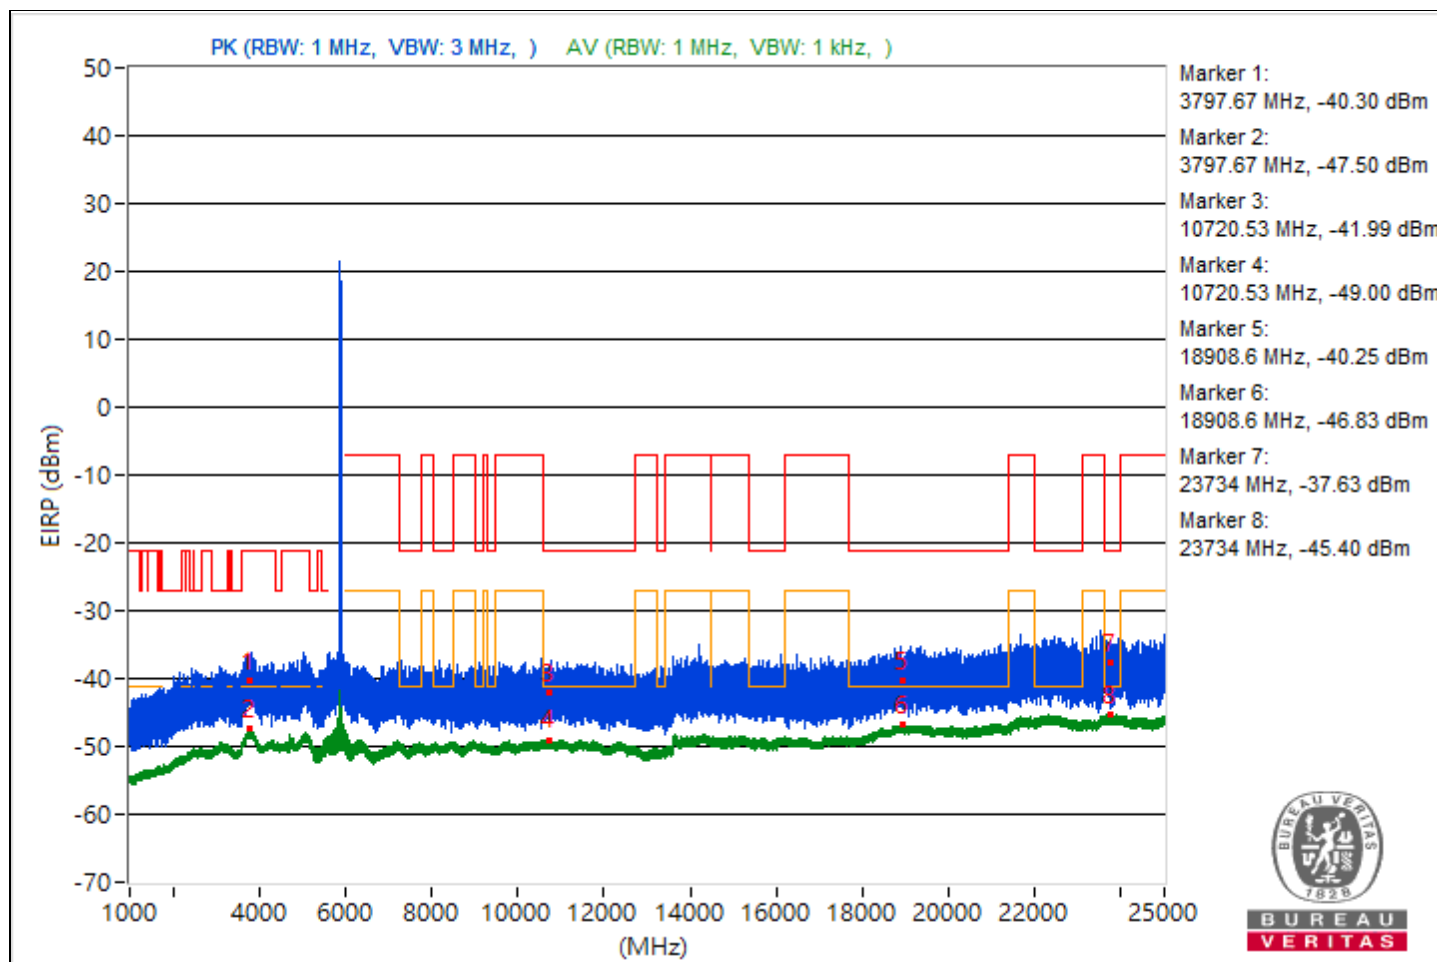


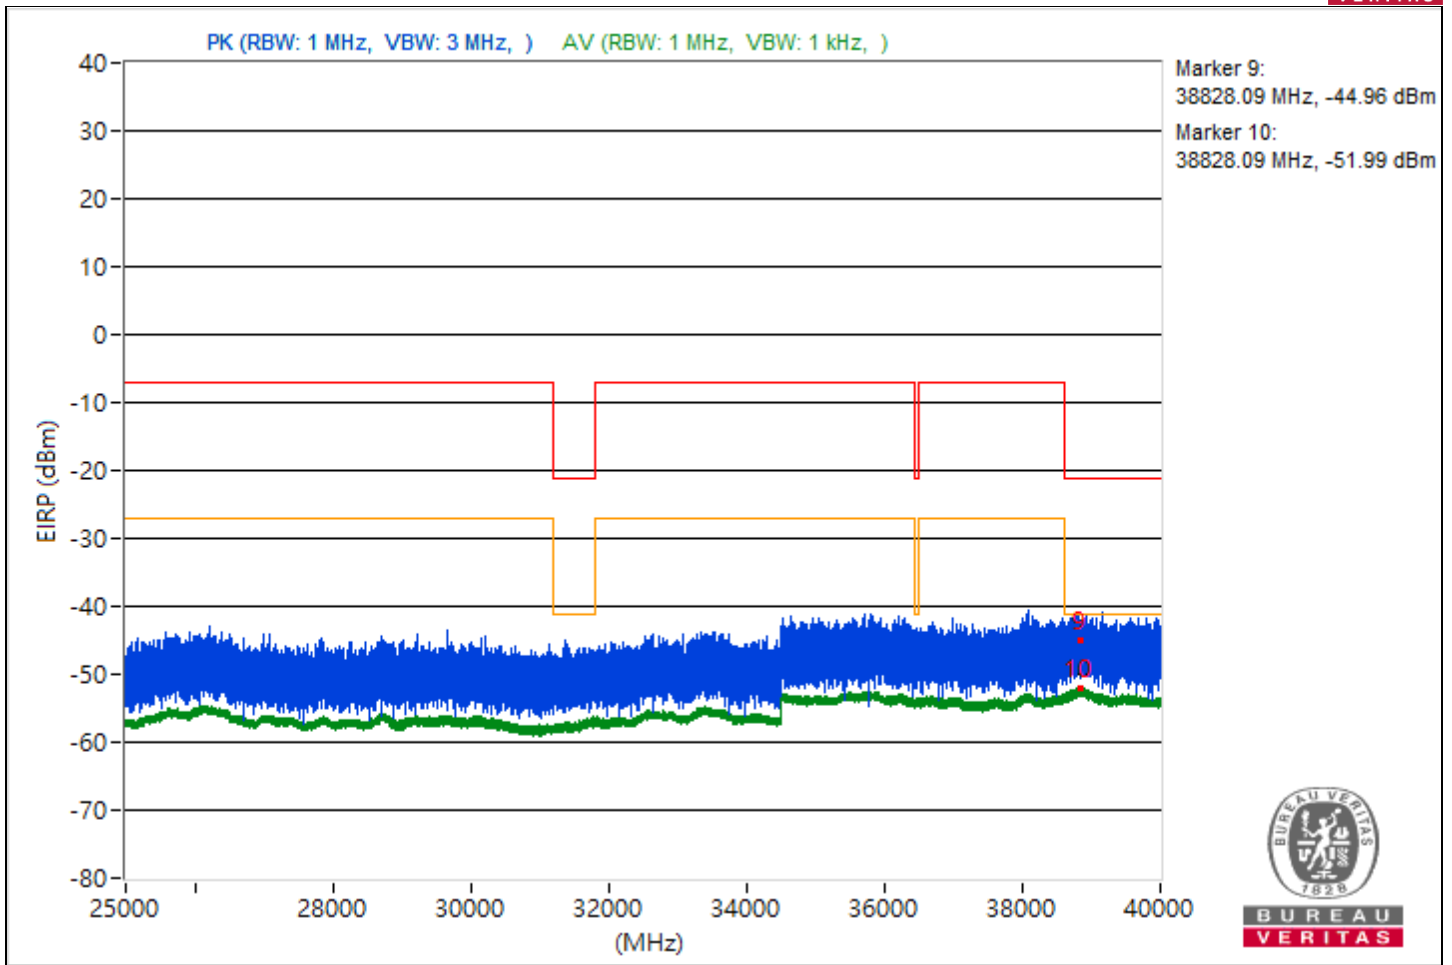


RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.51	57.17 PK	74	-16.83	-46.46	8.37	-38.09
2	3804.51	47.67 AV	54	-6.33	-55.96	8.37	-47.59
3	10660.89	51.65 PK	74	-22.35	-51.98	8.37	-43.61
4	10660.89	46.32 AV	54	-7.68	-57.31	8.37	-48.94
5	18960.6	55.58 PK	74	-18.42	-48.05	8.37	-39.68
6	18960.6	48.4 AV	54	-5.6	-55.23	8.37	-46.86
7	22385.8	58.66 PK	74	-15.34	-44.97	8.37	-36.6
8	22385.8	49.89 AV	54	-4.11	-53.74	8.37	-45.37
9	38840.62	52.92 PK	74	-21.08	-50.71	8.37	-42.34
10	38840.62	43.36 AV	54	-10.64	-60.27	8.37	-51.9

Note: Margin value = Emission Level - Limit value

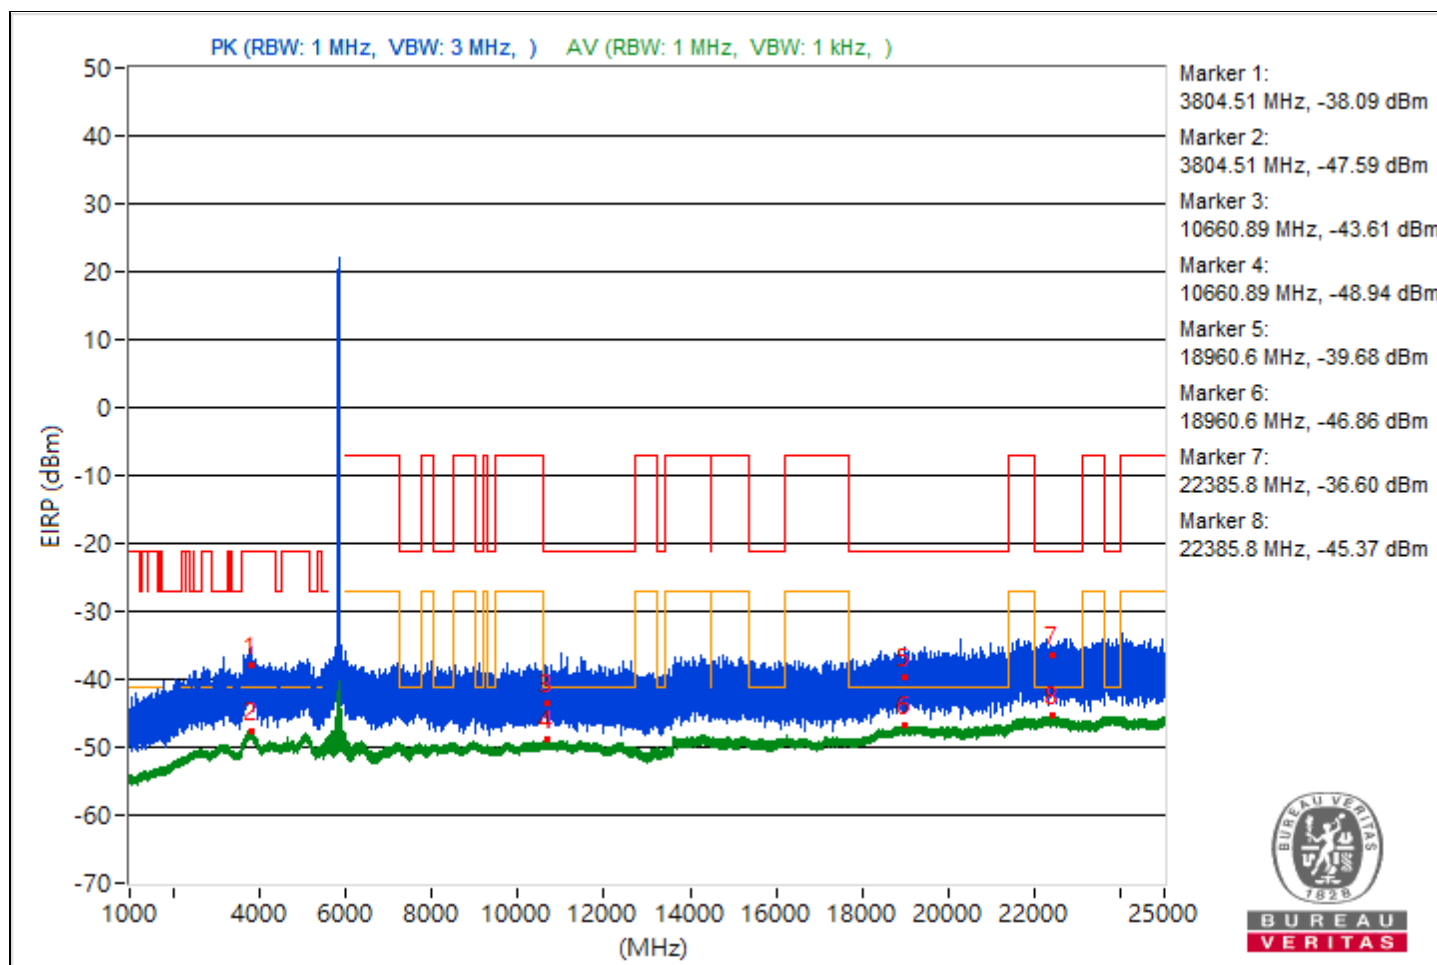


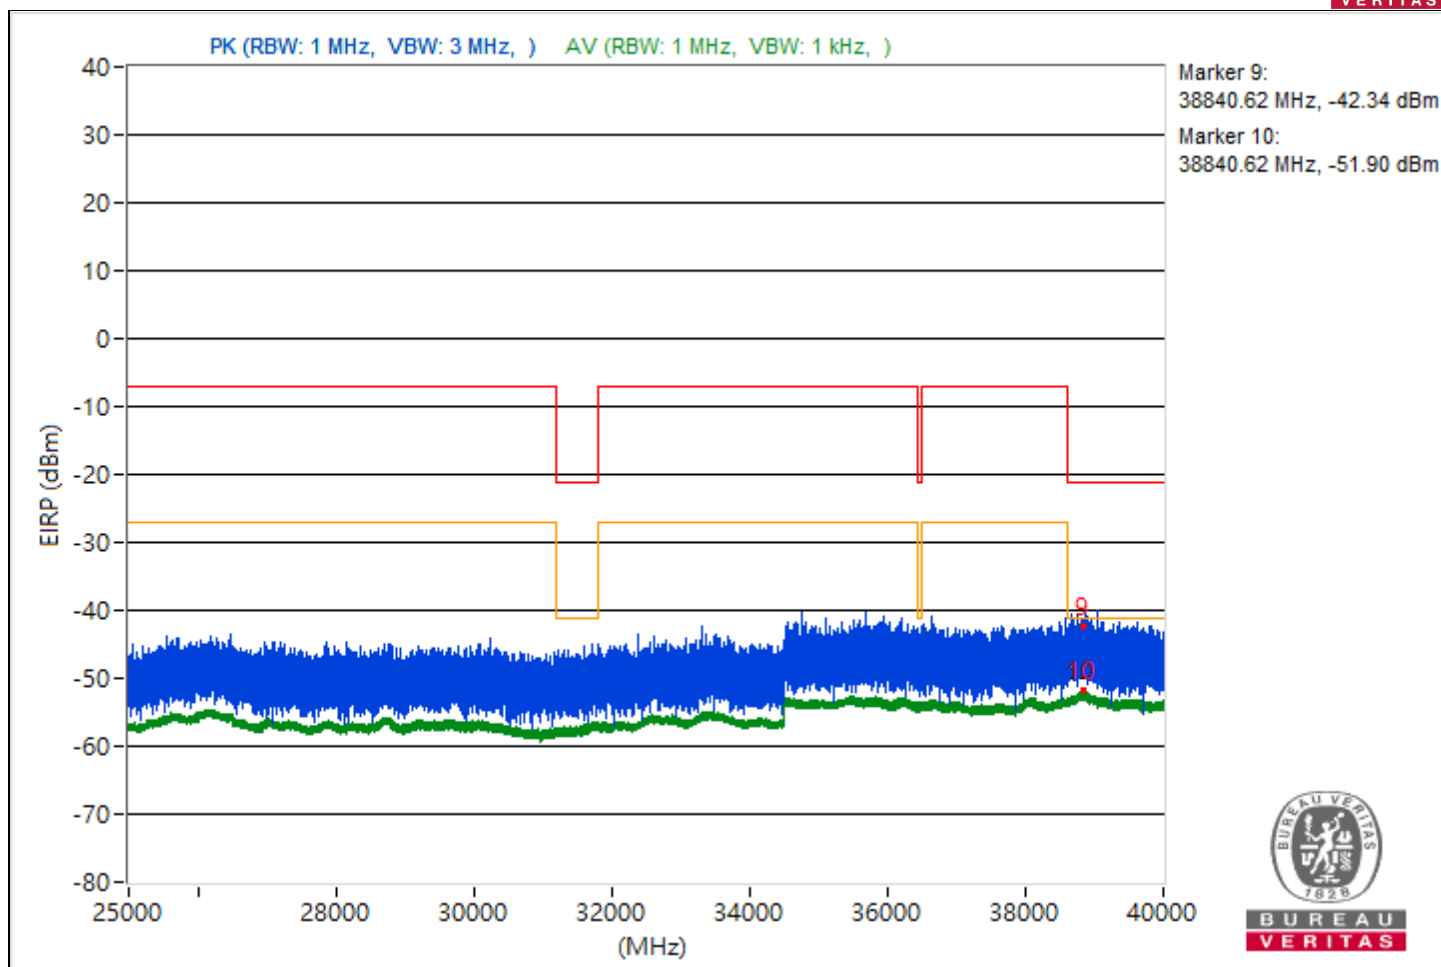


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.89	54.03 PK	74	-19.97	-49.6	8.37	-41.23
2	3803.89	47.73 AV	54	-6.27	-55.9	8.37	-47.53
3	11501.42	52.43 PK	74	-21.57	-51.2	8.37	-42.83
4	11501.42	46.17 AV	54	-7.83	-57.46	8.37	-49.09
5	19368.5	56.75 PK	74	-17.25	-46.88	8.37	-38.51
6	19368.5	48.44 AV	54	-5.56	-55.19	8.37	-46.82
7	23663.7	56.13 PK	74	-17.87	-47.5	8.37	-39.13
8	23663.7	49.98 AV	54	-4.02	-53.65	8.37	-45.28
9	38908.36	49.79 PK	74	-24.21	-53.84	8.37	-45.47
10	38908.36	43.35 AV	54	-10.65	-60.28	8.37	-51.91

Note: Margin value = Emission Level - Limit value

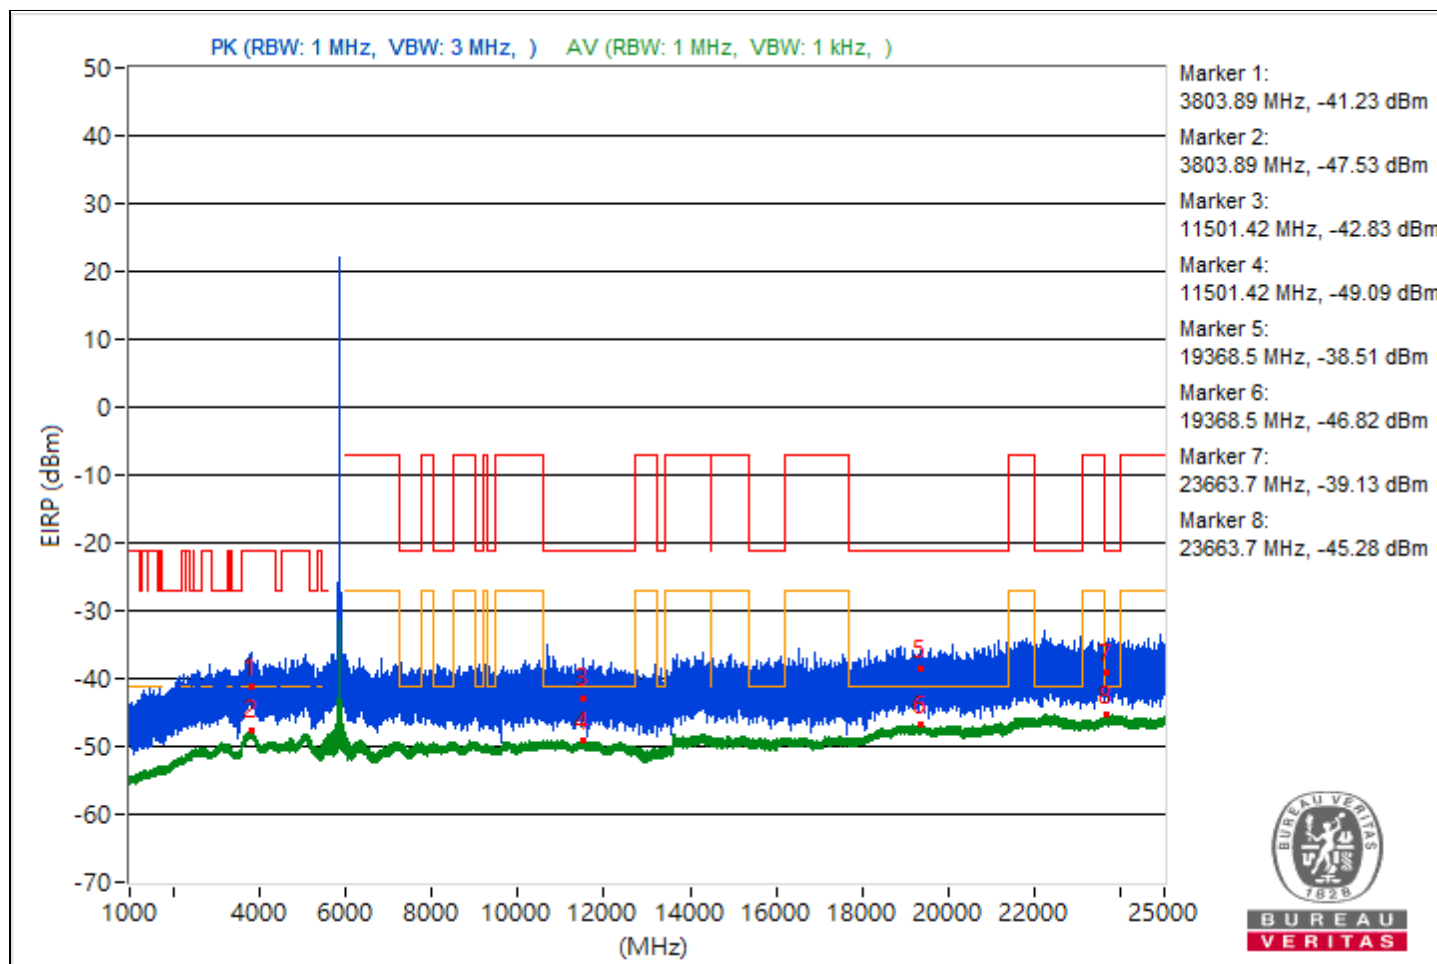


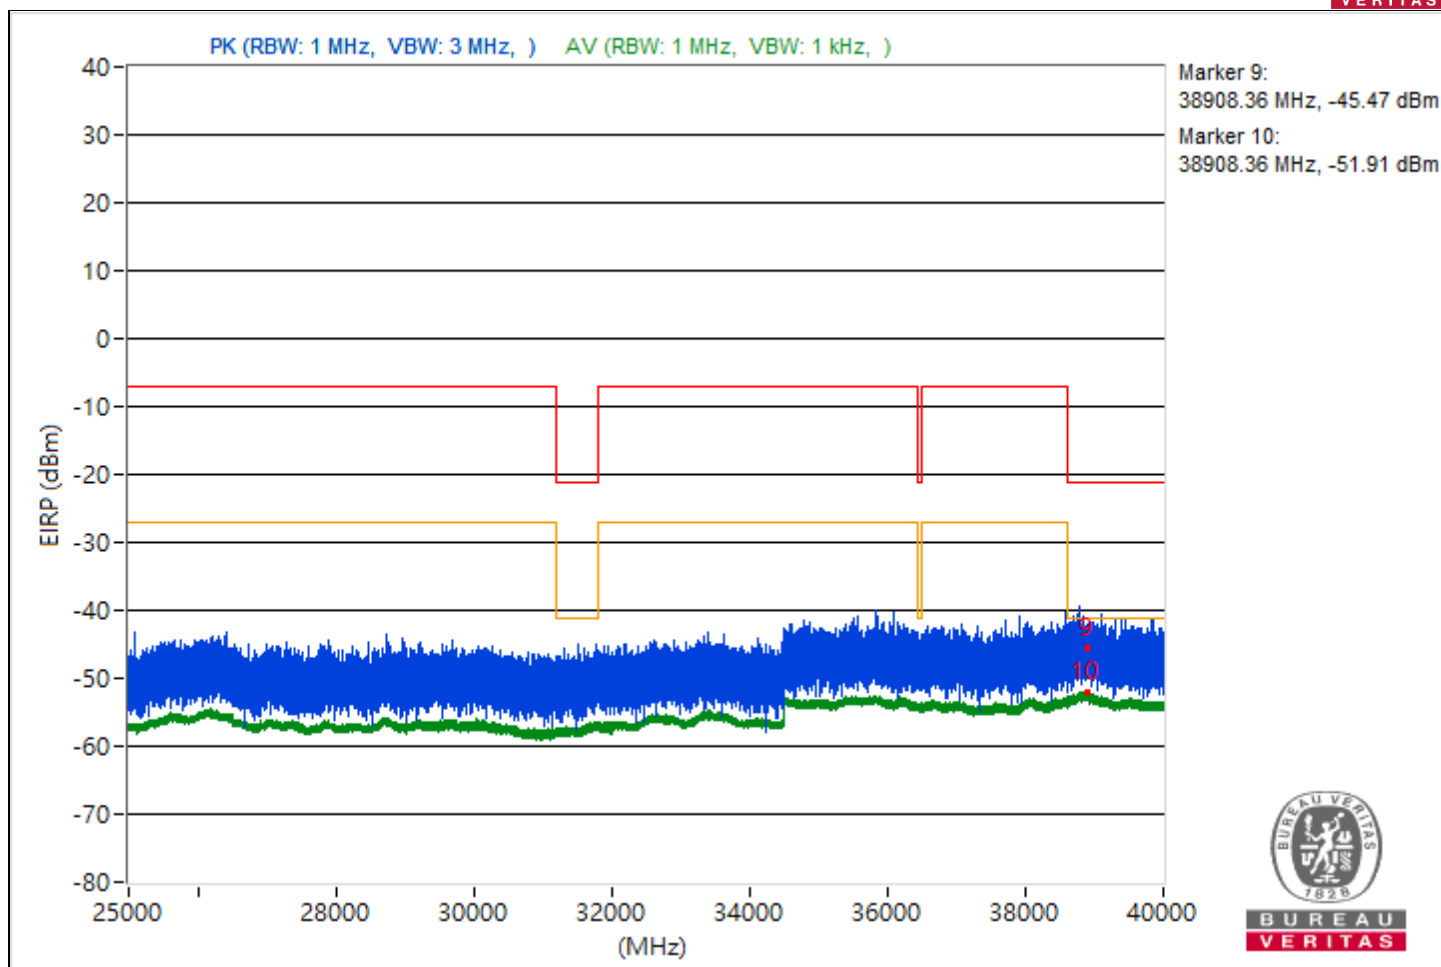


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.4	58.28 PK	74	-15.72	-45.35	8.37	-36.98
2	3815.4	49.52 AV	54	-4.48	-54.11	8.37	-45.74
3	8443.29	55.06 PK	74	-18.94	-48.57	8.37	-40.2
4	8443.29	46.87 AV	54	-7.13	-56.76	8.37	-48.39
5	19451.5	54.27 PK	74	-19.73	-49.36	8.37	-40.99
6	19451.5	48.88 AV	54	-5.12	-54.75	8.37	-46.38
7	23872.4	58.94 PK	74	-15.06	-44.69	8.37	-36.32
8	23872.4	50.96 AV	54	-3.04	-52.67	8.37	-44.3
9	39996.44	51.83 PK	74	-22.17	-51.8	8.37	-43.43
10	39996.44	44.79 AV	54	-9.21	-58.84	8.37	-50.47

Note: Margin value = Emission Level - Limit value

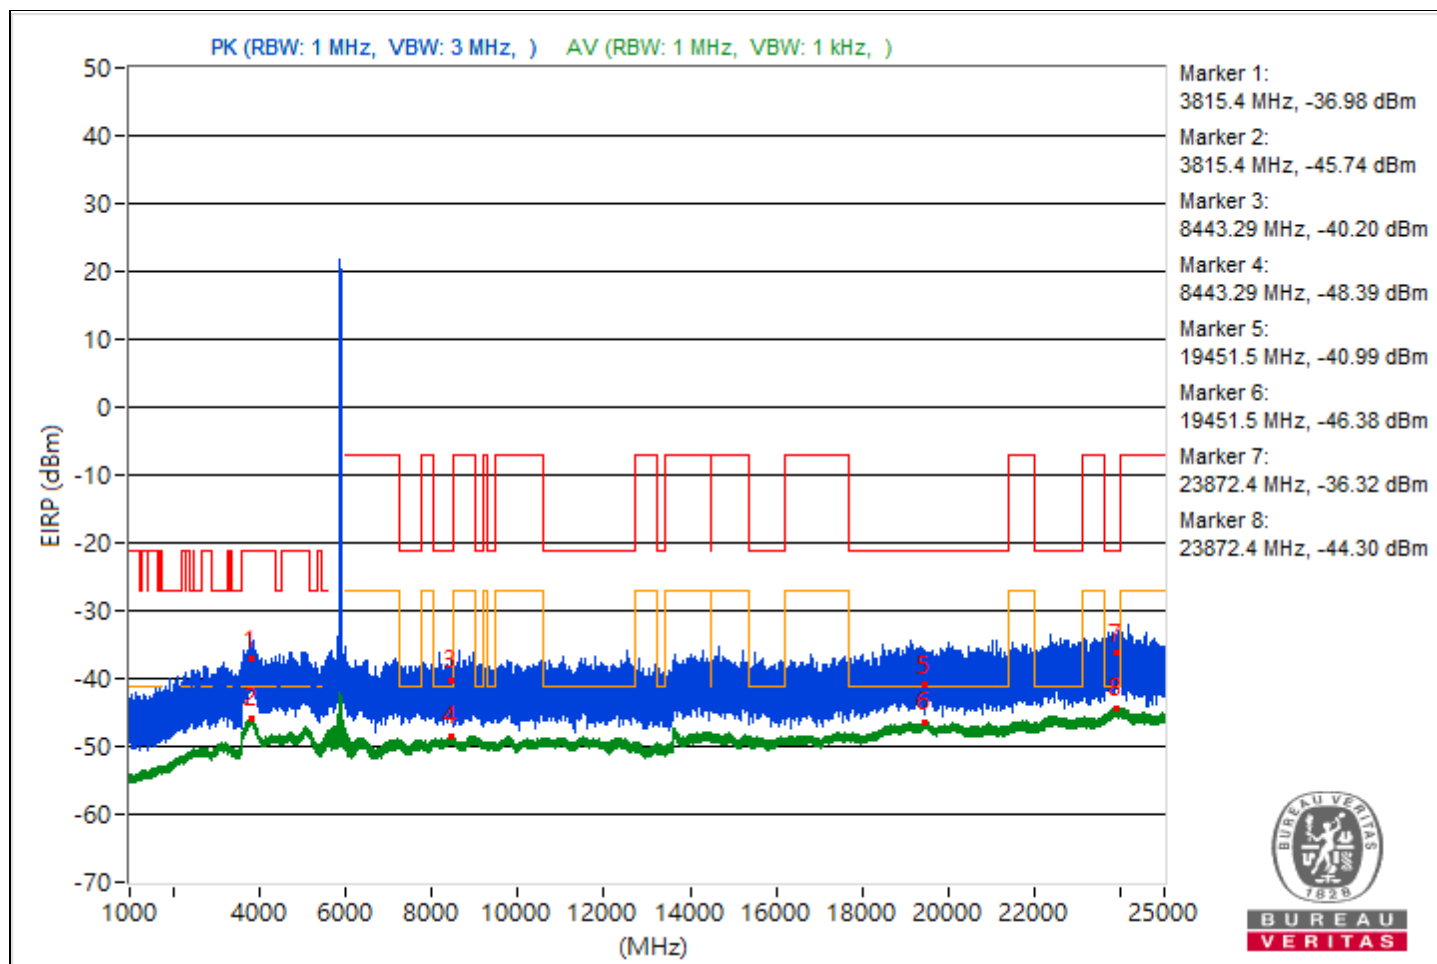


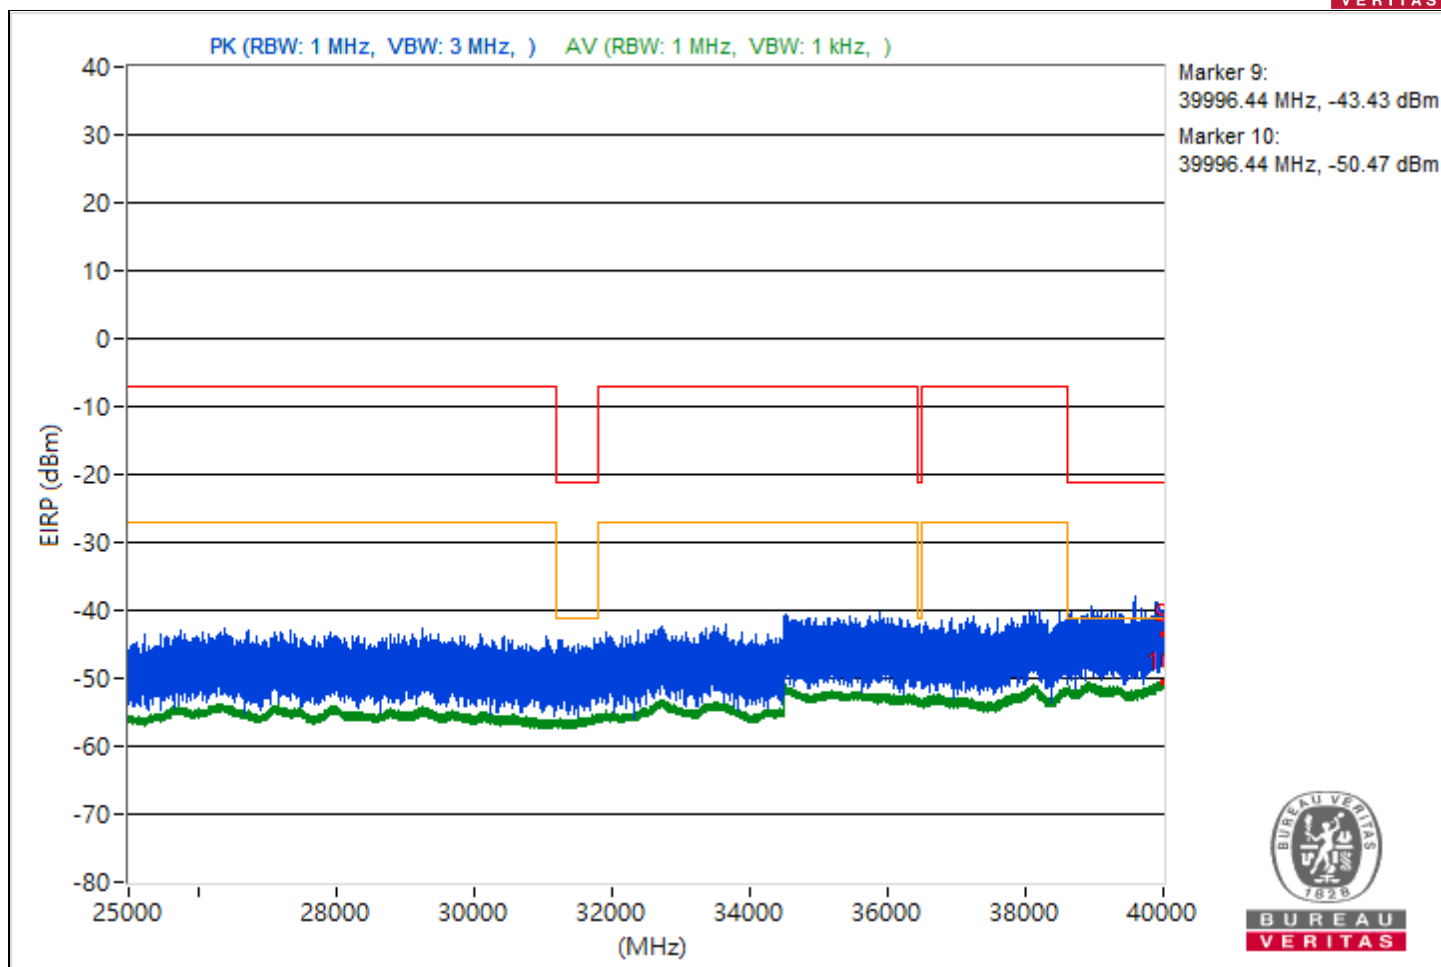


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.89	54.41 PK	74	-19.59	-49.22	8.37	-40.85
2	3789.89	47.69 AV	54	-6.31	-55.94	8.37	-47.57
3	11019.2	53.53 PK	74	-20.47	-50.1	8.37	-41.73
4	11019.2	46.3 AV	54	-7.7	-57.33	8.37	-48.96
5	18982.7	53.72 PK	74	-20.28	-49.91	8.37	-41.54
6	18982.7	48.38 AV	54	-5.62	-55.25	8.37	-46.88
7	23698.3	56.66 PK	74	-17.34	-46.97	8.37	-38.6
8	23698.3	50.02 AV	54	-3.98	-53.61	8.37	-45.24
9	38835.02	47.5 PK	74	-26.5	-56.13	8.37	-47.76
10	38835.02	43.35 AV	54	-10.65	-60.28	8.37	-51.91

Note: Margin value = Emission Level - Limit value

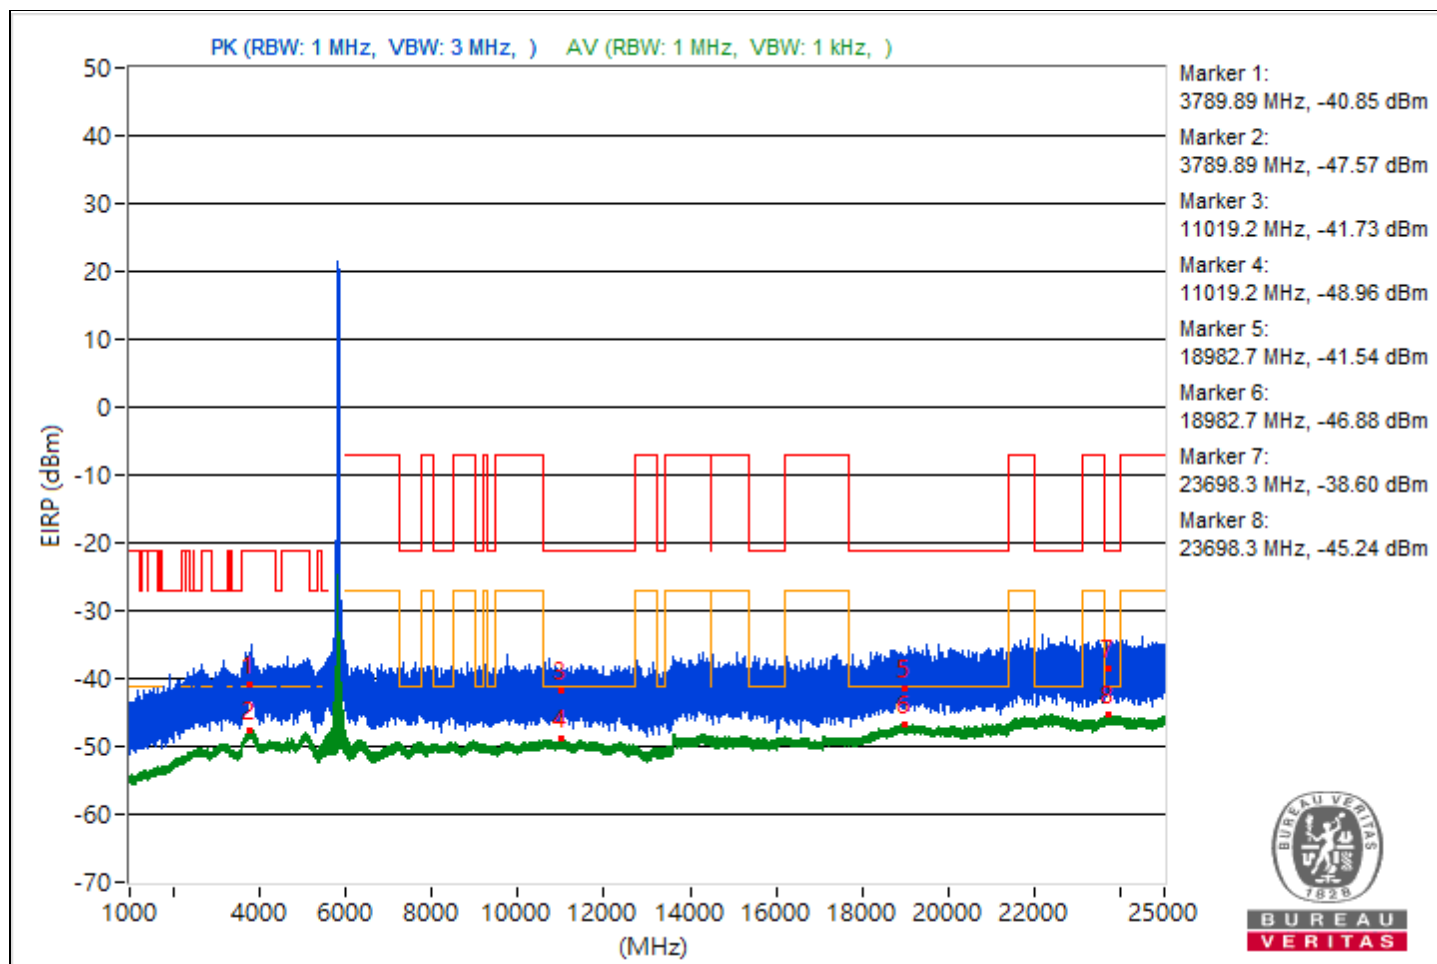


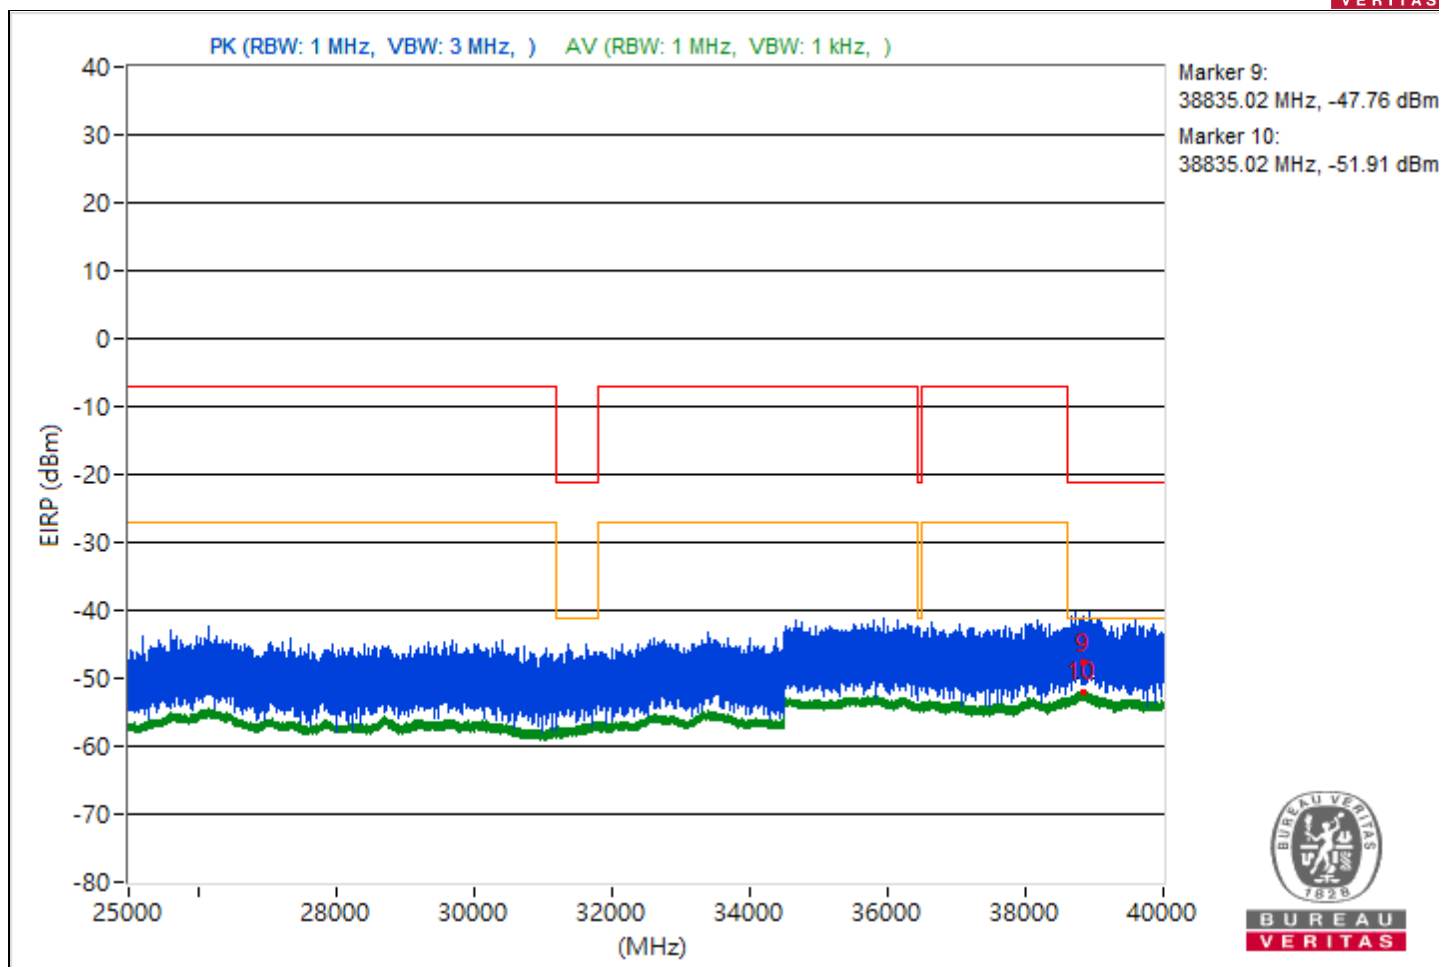


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.48	54.55 PK	74	-19.45	-49.08	8.37	-40.71
2	3808.48	47.64 AV	54	-6.36	-55.99	8.37	-47.62
3	10718.67	55.25 PK	74	-18.75	-48.38	8.37	-40.01
4	10718.67	46.34 AV	54	-7.66	-57.29	8.37	-48.92
5	18859.4	55.29 PK	74	-18.71	-48.34	8.37	-39.97
6	18859.4	48.46 AV	54	-5.54	-55.17	8.37	-46.8
7	22233.2	54.57 PK	74	-19.43	-49.06	8.37	-40.69
8	22233.2	49.87 AV	54	-4.13	-53.76	8.37	-45.39
9	38834.76	51.45 PK	74	-22.55	-52.18	8.37	-43.81
10	38834.76	43.19 AV	54	-10.81	-60.44	8.37	-52.07

Note: Margin value = Emission Level - Limit value

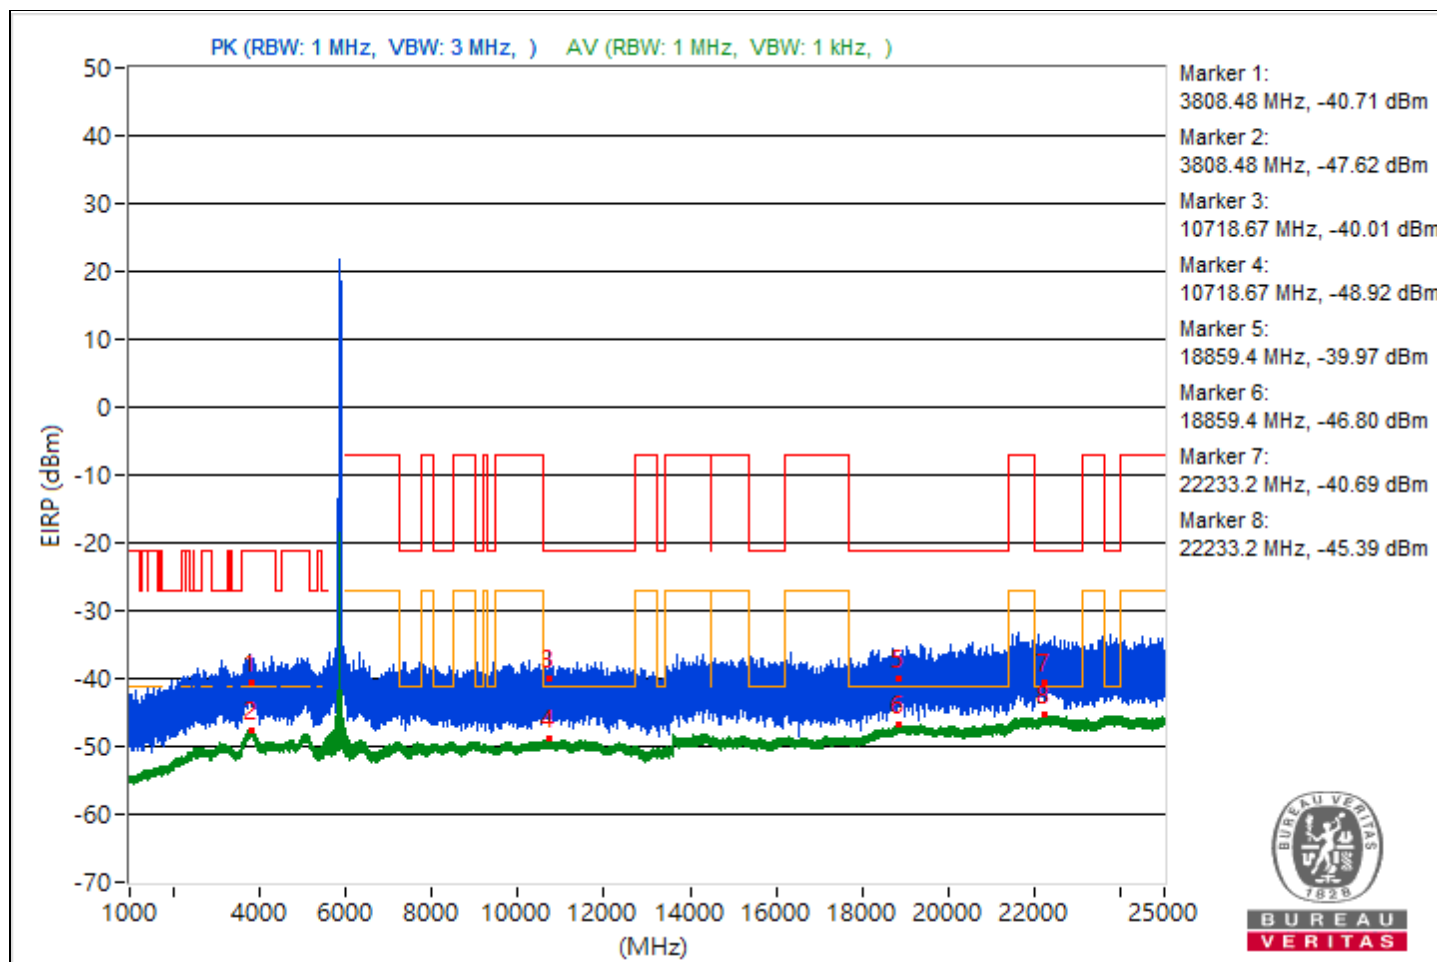


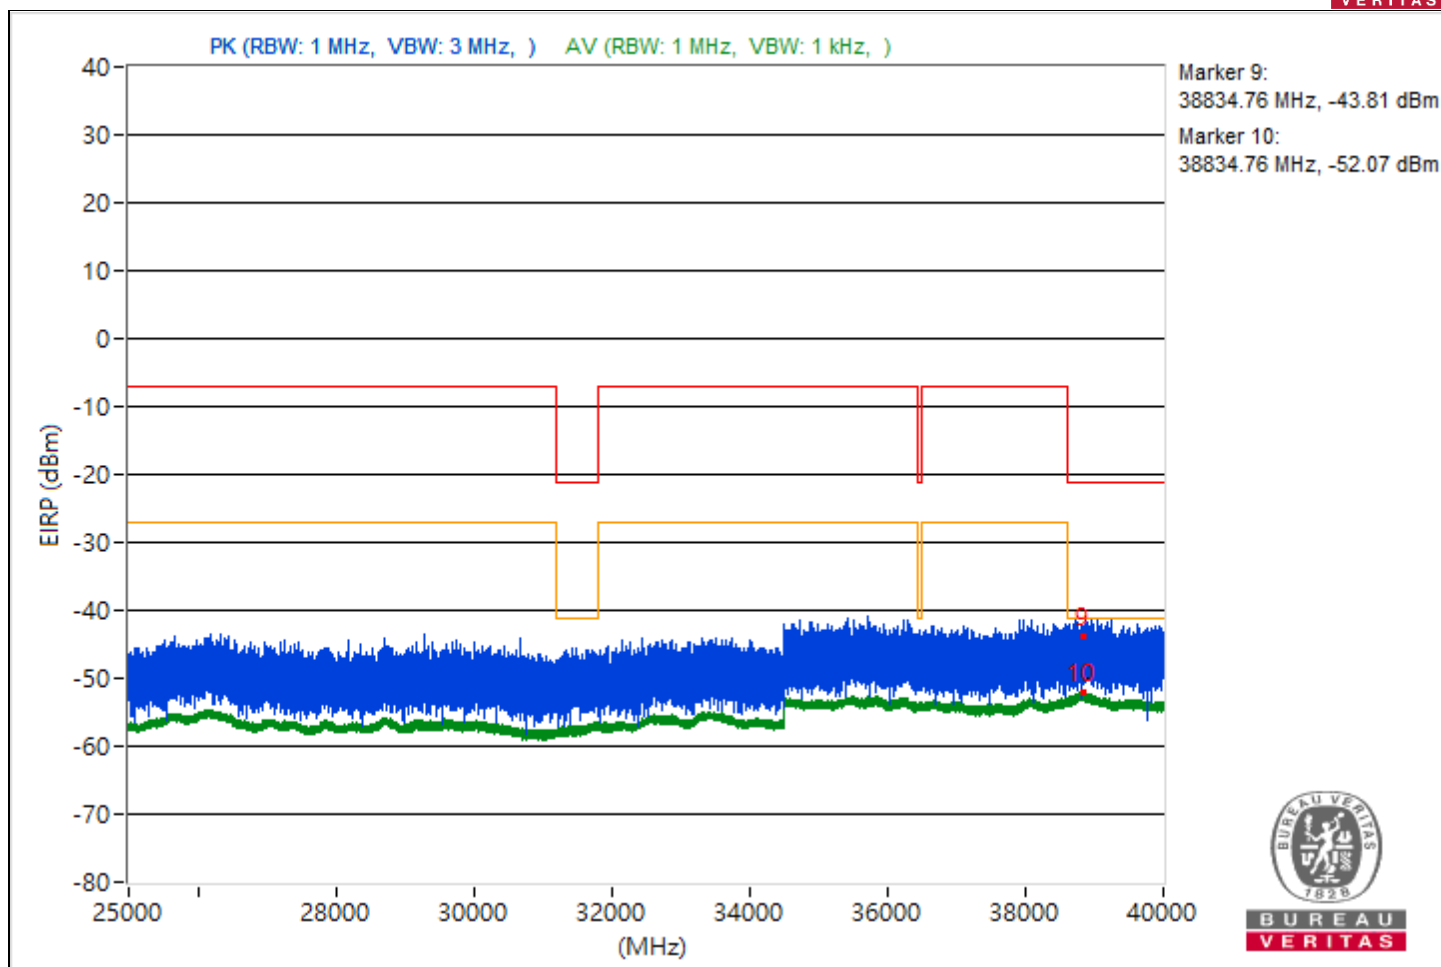


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.78	53.14 PK	74	-20.86	-50.49	8.37	-42.12
2	3807.78	47.95 AV	54	-6.05	-55.68	8.37	-47.31
3	10703.11	55.05 PK	74	-18.95	-48.58	8.37	-40.21
4	10703.11	46.45 AV	54	-7.55	-57.18	8.37	-48.81
5	18861.5	54.82 PK	74	-19.18	-48.81	8.37	-40.44
6	18861.5	48.49 AV	54	-5.51	-55.14	8.37	-46.77
7	23792.5	53.8 PK	74	-20.2	-49.83	8.37	-41.46
8	23792.5	49.96 AV	54	-4.04	-53.67	8.37	-45.3
9	38832.8	49.02 PK	74	-24.98	-54.61	8.37	-46.24
10	38832.8	43.22 AV	54	-10.78	-60.41	8.37	-52.04

Note: Margin value = Emission Level - Limit value

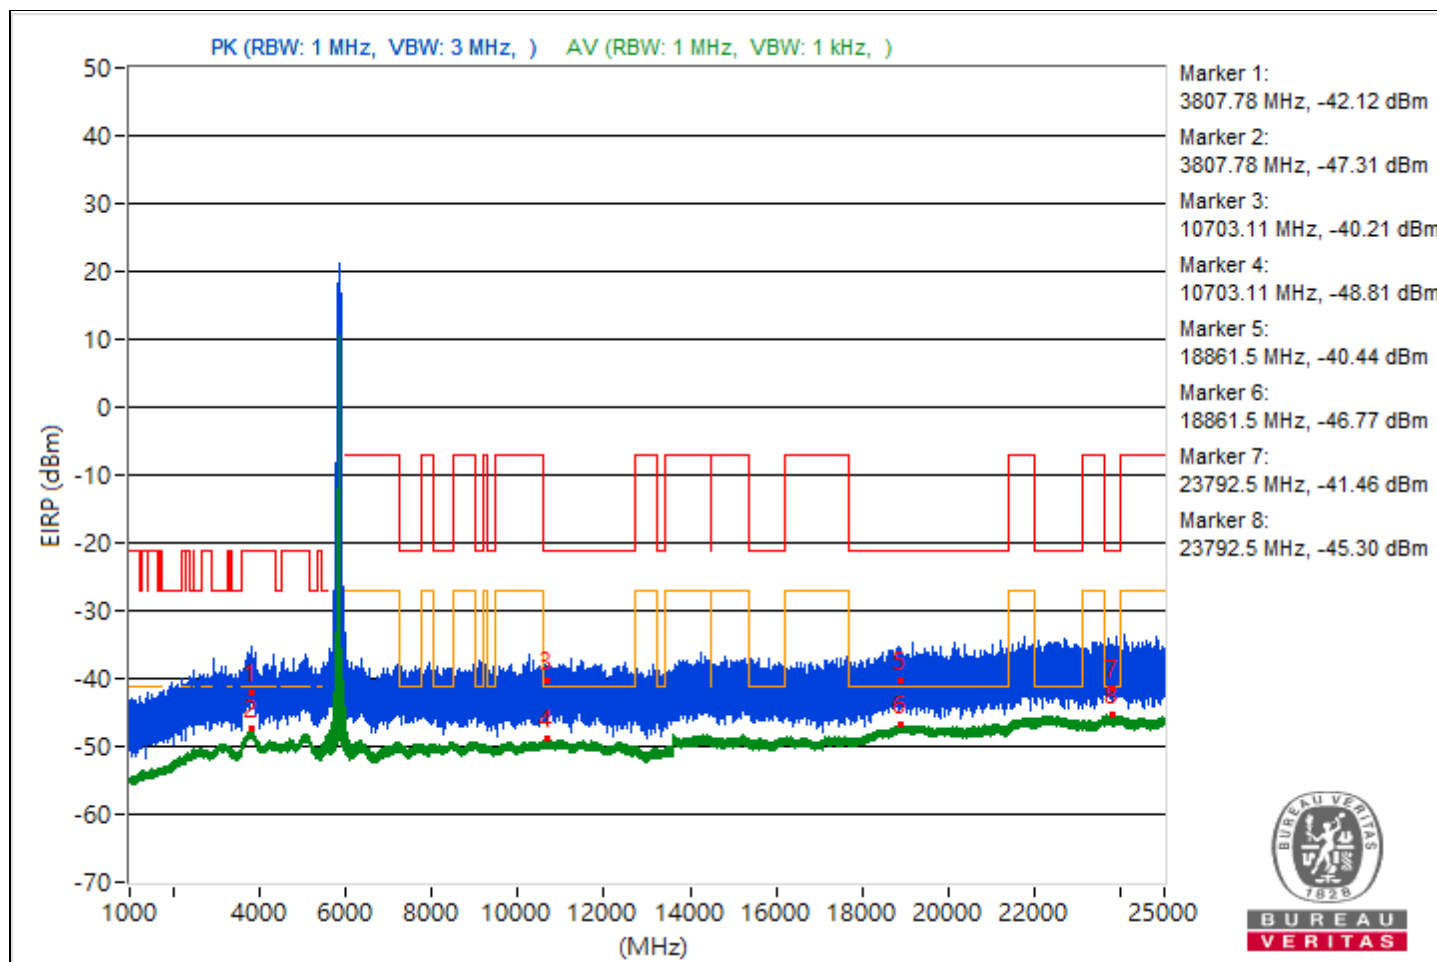


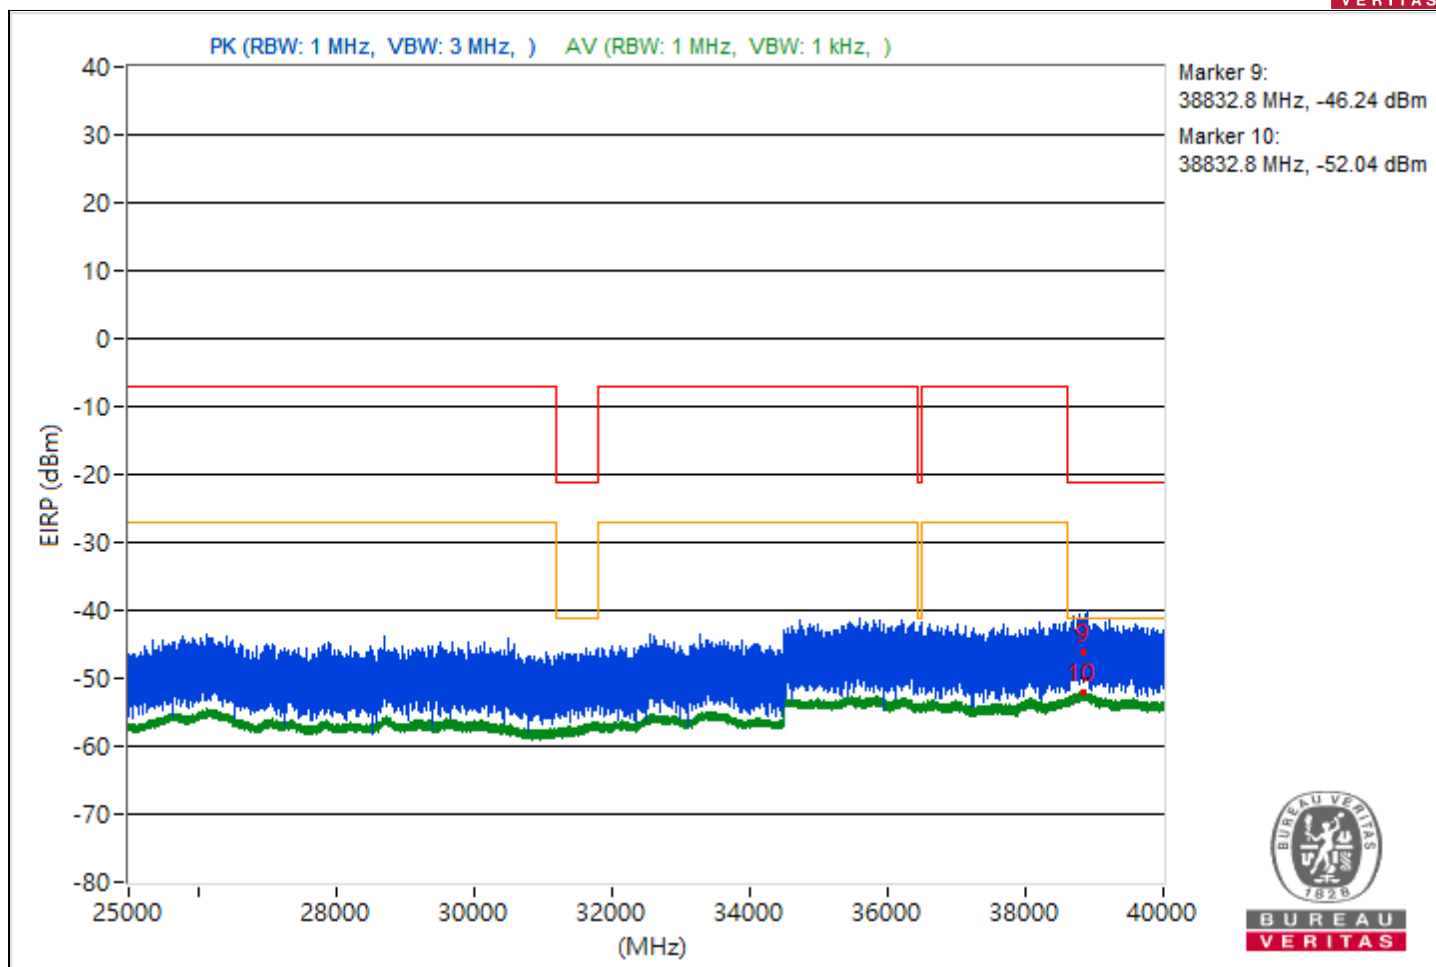


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.14	56.14 PK	74	-17.86	-47.49	8.37	-39.12
2	3813.14	47.59 AV	54	-6.41	-56.04	8.37	-47.67
3	11033.96	51.67 PK	74	-22.33	-51.96	8.37	-43.59
4	11033.96	46.14 AV	54	-7.86	-57.49	8.37	-49.12
5	19143.5	55.87 PK	74	-18.13	-47.76	8.37	-39.39
6	19143.5	48.53 AV	54	-5.47	-55.1	8.37	-46.73
7	22263.2	56.43 PK	74	-17.57	-47.2	8.37	-38.83
8	22263.2	50.02 AV	54	-3.98	-53.61	8.37	-45.24
9	38852.18	48.32 PK	74	-25.68	-55.31	8.37	-46.94
10	38852.18	43.25 AV	54	-10.75	-60.38	8.37	-52.01

Note: Margin value = Emission Level - Limit value

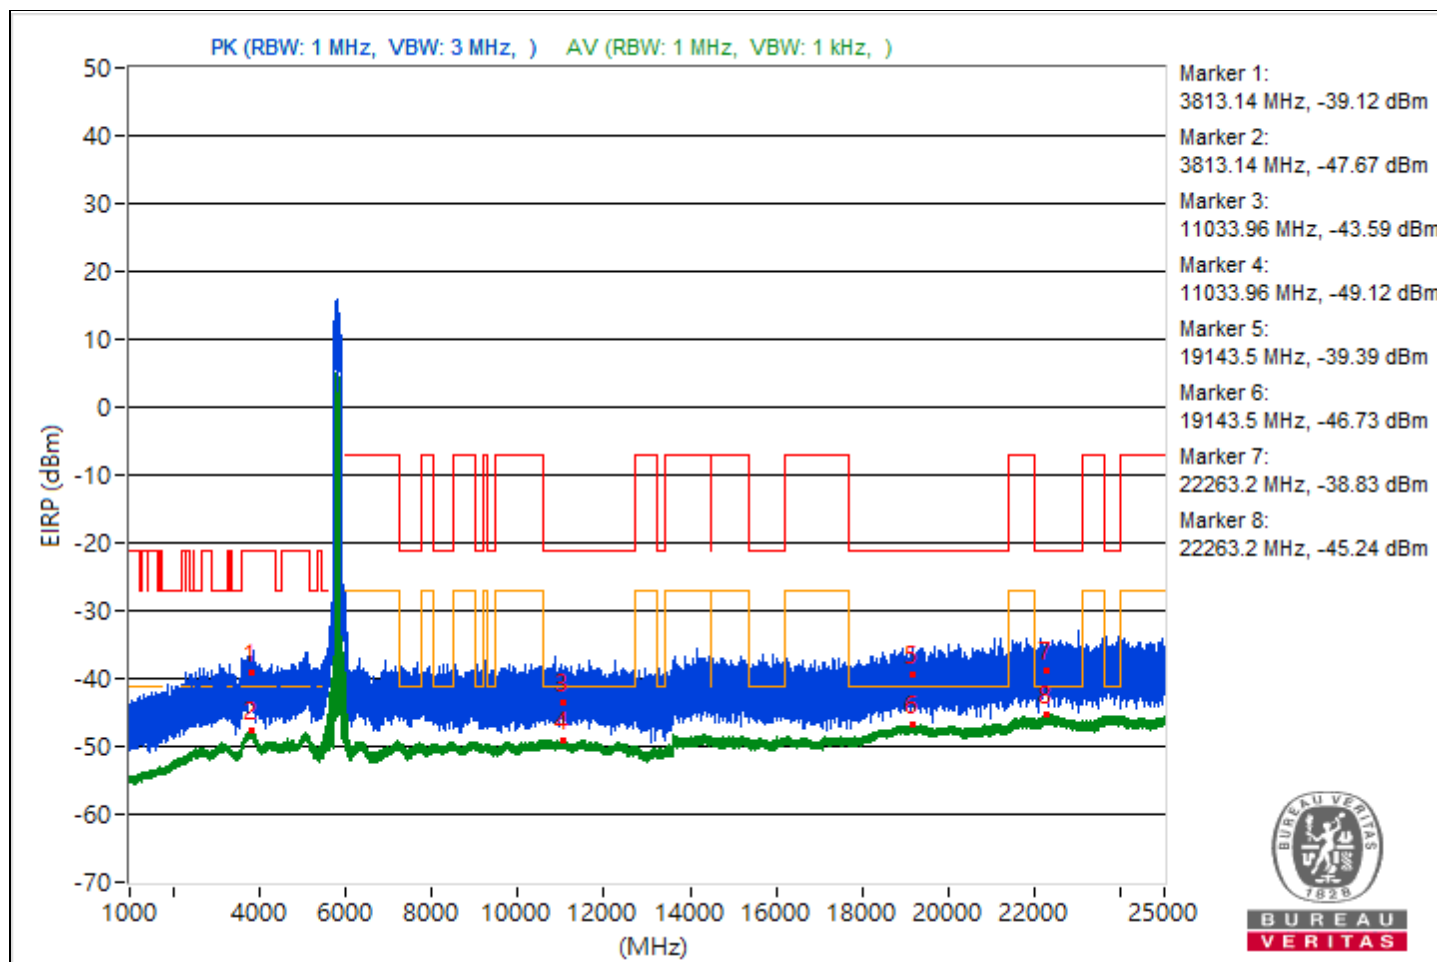


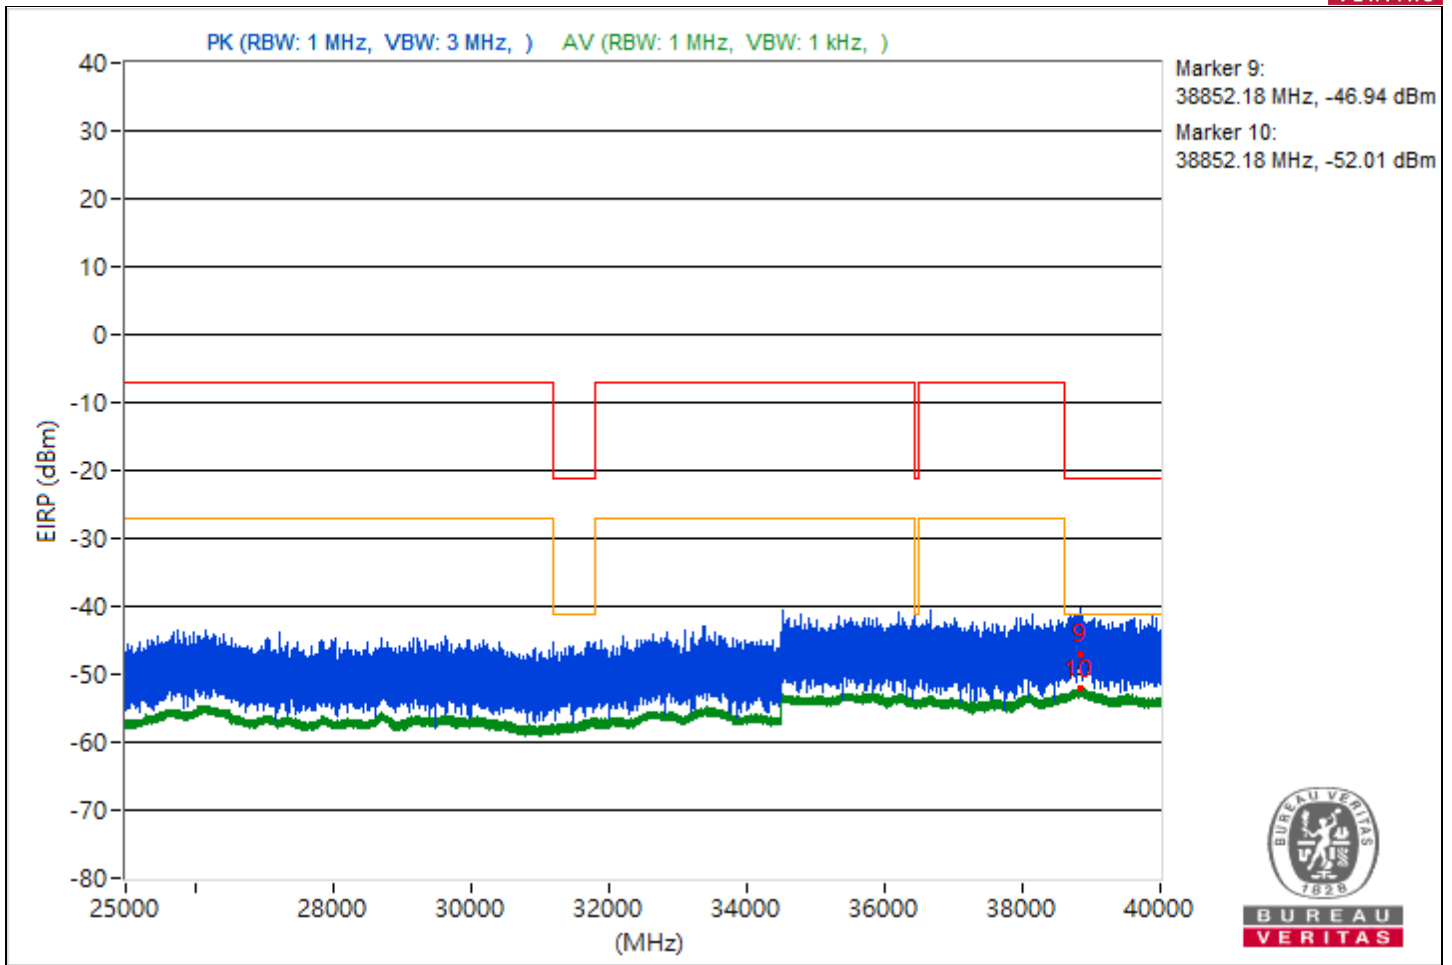


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3772.93	57.18 PK	74	-16.82	-46.45	8.37	-38.08
2	3772.93	47.61 AV	54	-6.39	-56.02	8.37	-47.65
3	10617.16	54.9 PK	74	-19.1	-48.73	8.37	-40.36
4	10617.16	46.15 AV	54	-7.85	-57.48	8.37	-49.11
5	18900.1	56.24 PK	74	-17.76	-47.39	8.37	-39.02
6	18900.1	48.46 AV	54	-5.54	-55.17	8.37	-46.8
7	22252.7	57.89 PK	74	-16.11	-45.74	8.37	-37.37
8	22252.7	50 AV	54	-4	-53.63	8.37	-45.26
9	38811.02	51.57 PK	74	-22.43	-52.06	8.37	-43.69
10	38811.02	43.39 AV	54	-10.61	-60.24	8.37	-51.87

Note: Margin value = Emission Level - Limit value

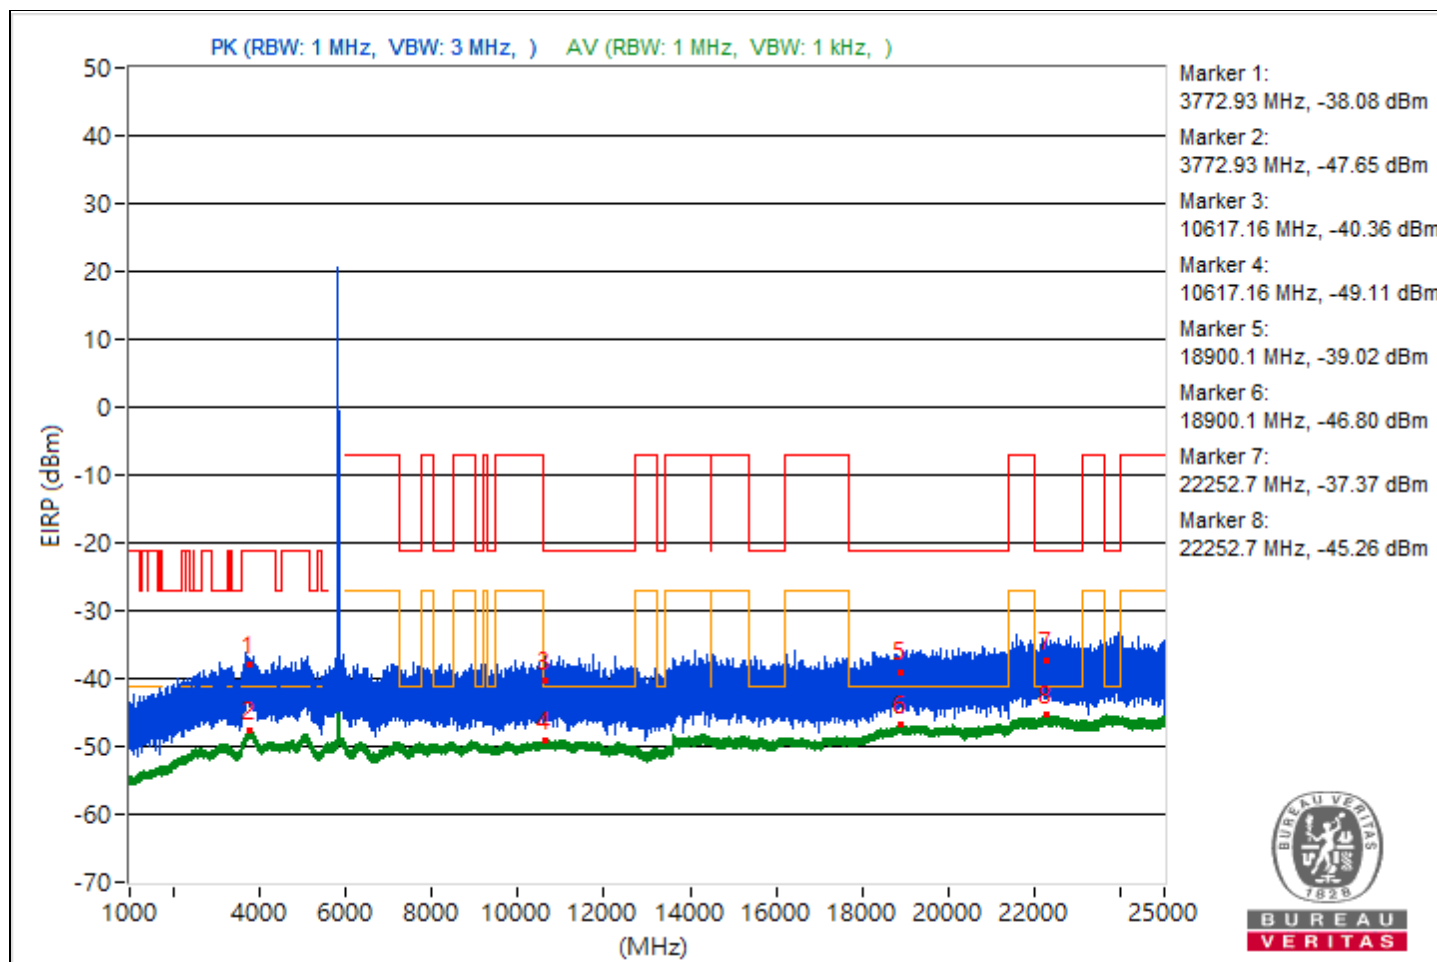


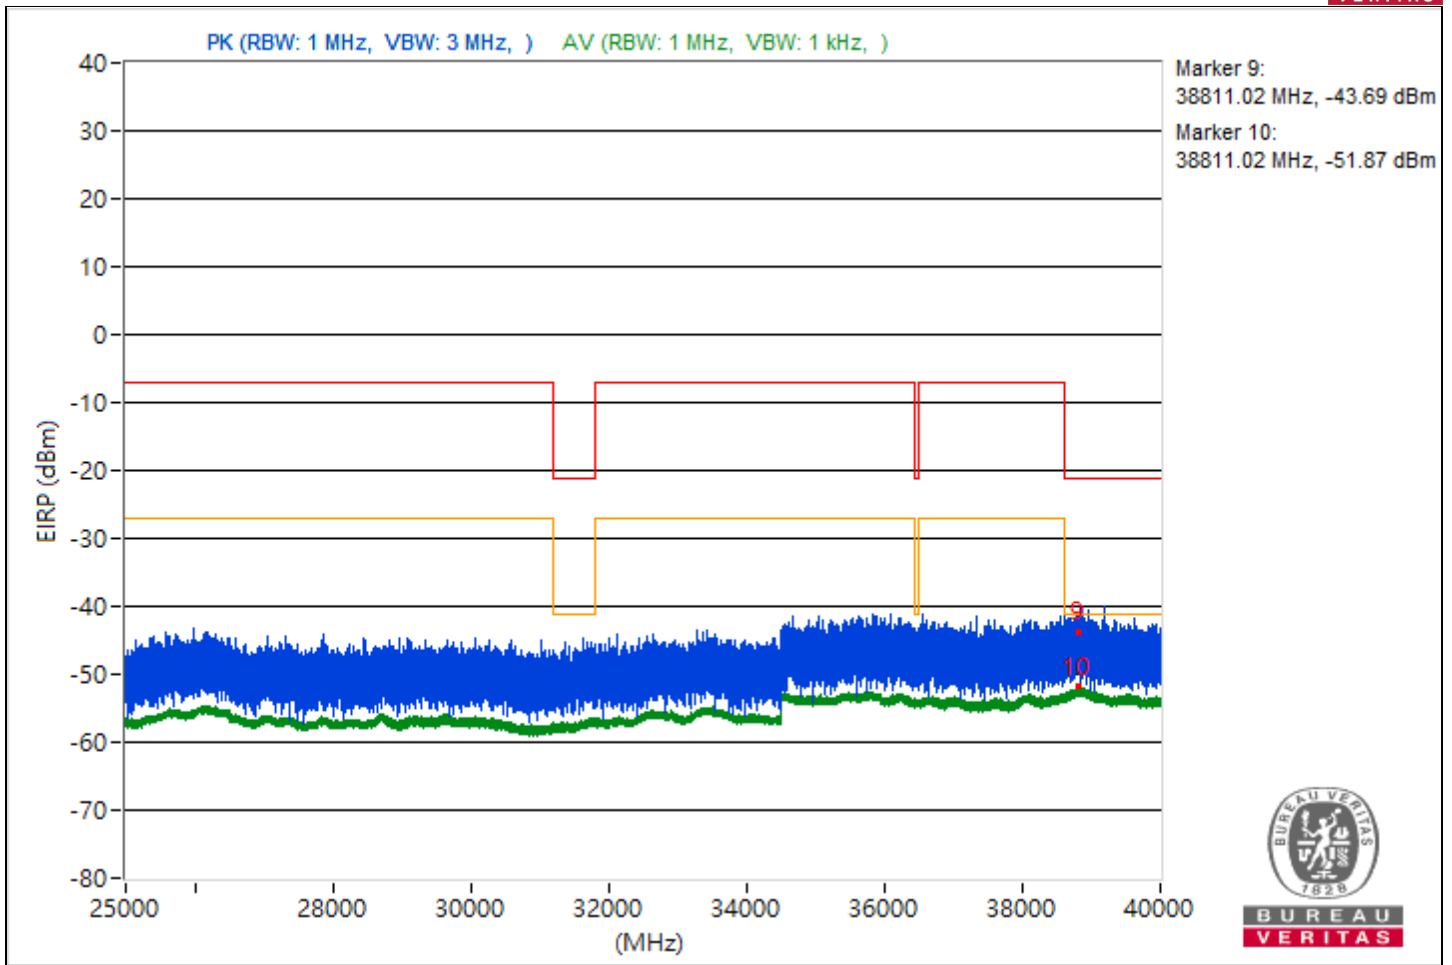


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3795.33	60.16 PK	74	-13.84	-43.47	8.37	-35.1
2	3795.33	47.8 AV	54	-6.2	-55.83	8.37	-47.46
3	11055.82	54.23 PK	74	-19.77	-49.4	8.37	-41.03
4	11055.82	46.22 AV	54	-7.78	-57.41	8.37	-49.04
5	19306.6	54.96 PK	74	-19.04	-48.67	8.37	-40.3
6	19306.6	48.48 AV	54	-5.52	-55.15	8.37	-46.78
7	23853.8	56.03 PK	74	-17.97	-47.6	8.37	-39.23
8	23853.8	49.97 AV	54	-4.03	-53.66	8.37	-45.29
9	38836.8	46.91 PK	74	-27.09	-56.72	8.37	-48.35
10	38836.8	43.36 AV	54	-10.64	-60.27	8.37	-51.9

Note: Margin value = Emission Level - Limit value

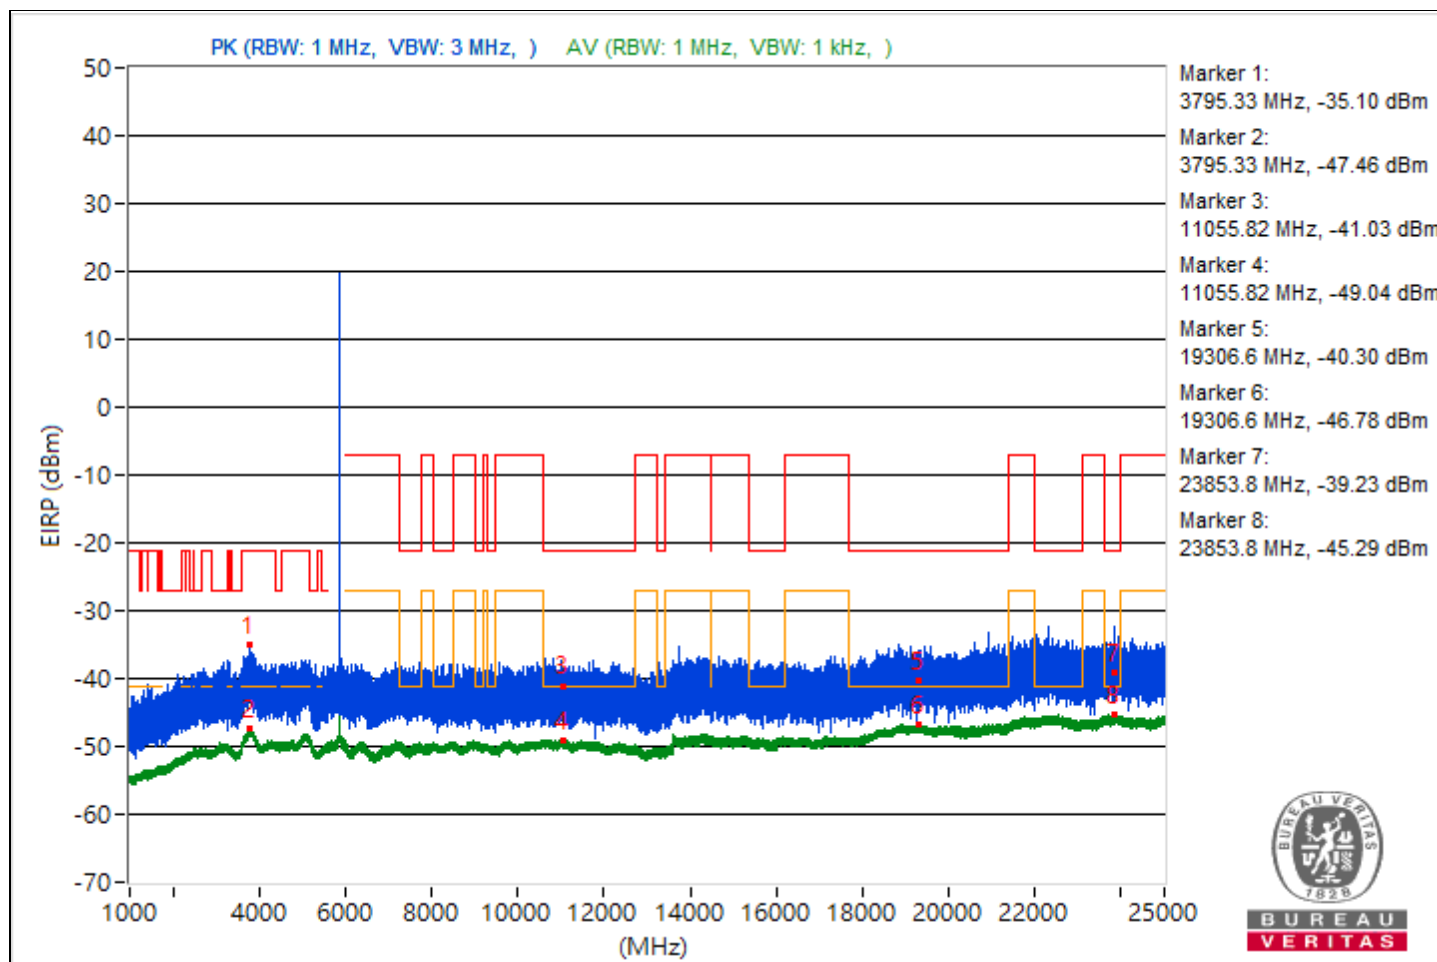


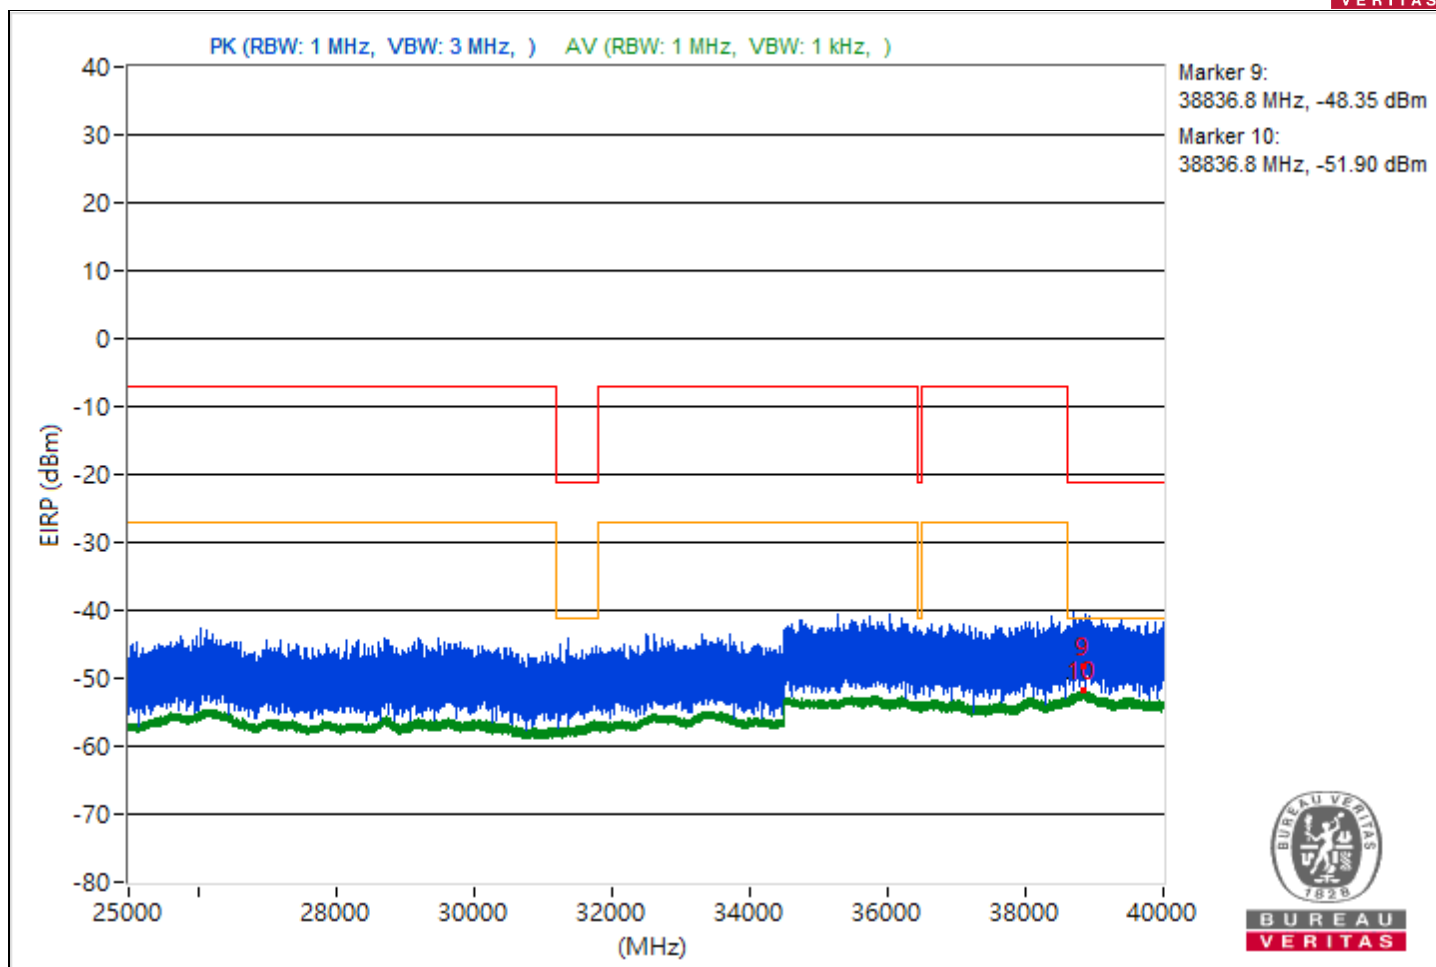


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3829.79	54.29 PK	74	-19.71	-49.34	8.37	-40.97
2	3829.79	48.29 AV	54	-5.71	-55.34	8.37	-46.97
3	9003.91	52.49 PK	74	-21.51	-51.14	8.37	-42.77
4	9003.91	46.57 AV	54	-7.43	-57.06	8.37	-48.69
5	19445.6	57.41 PK	74	-16.59	-46.22	8.37	-37.85
6	19445.6	49.21 AV	54	-4.79	-54.42	8.37	-46.05
7	23841.6	57.04 PK	74	-16.96	-46.59	8.37	-38.22
8	23841.6	50.89 AV	54	-3.11	-52.74	8.37	-44.37
9	38794.4	48.92 PK	74	-25.08	-54.71	8.37	-46.34
10	38794.4	44.92 AV	54	-9.08	-58.71	8.37	-50.34

Note: Margin value = Emission Level - Limit value

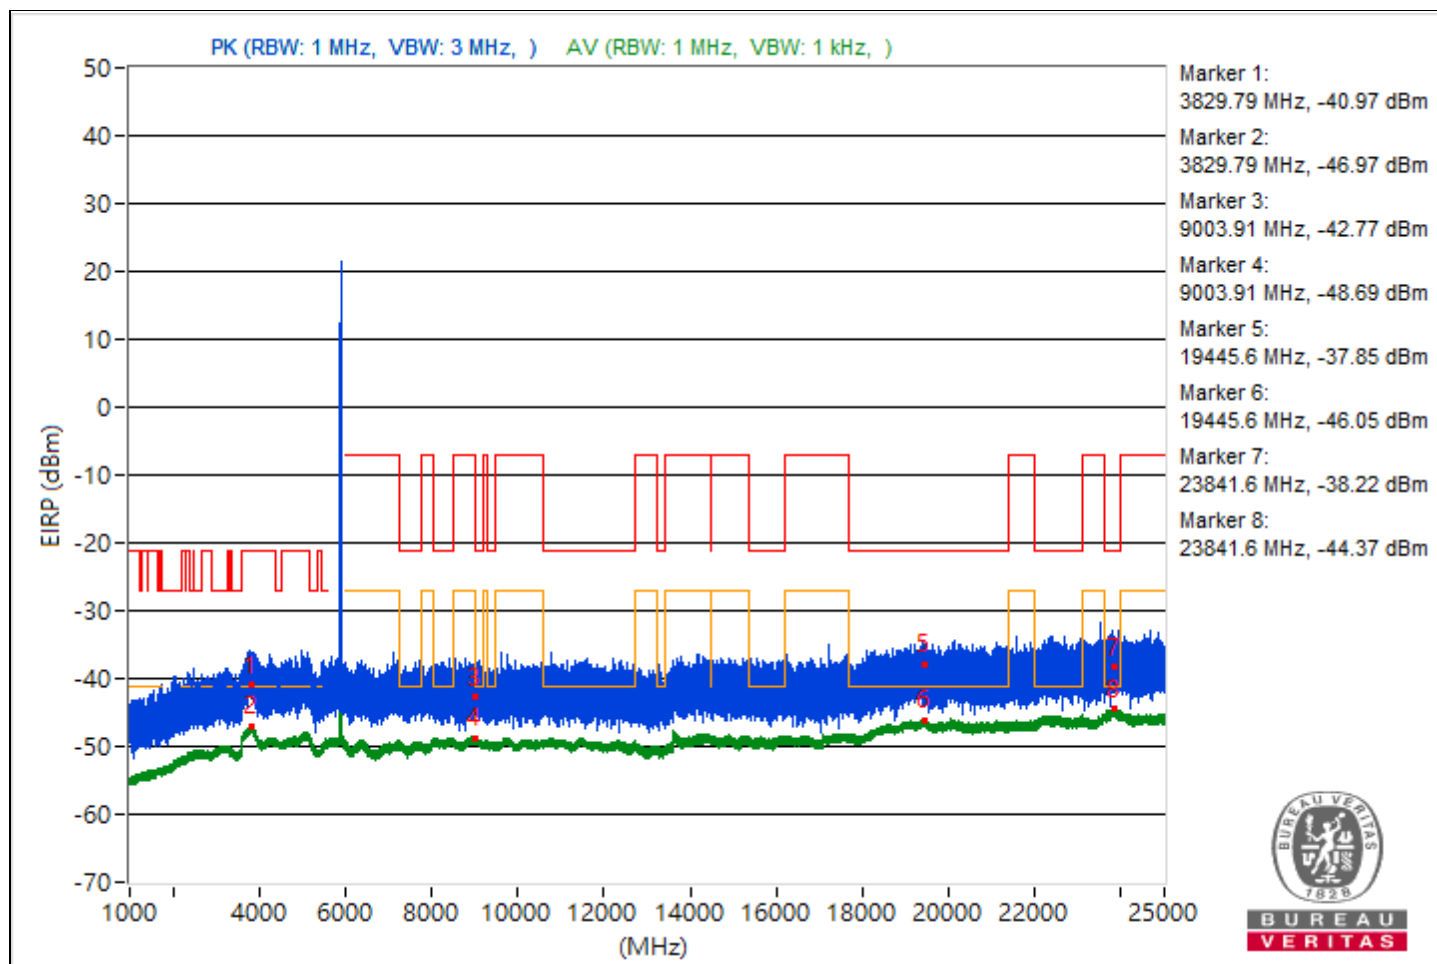


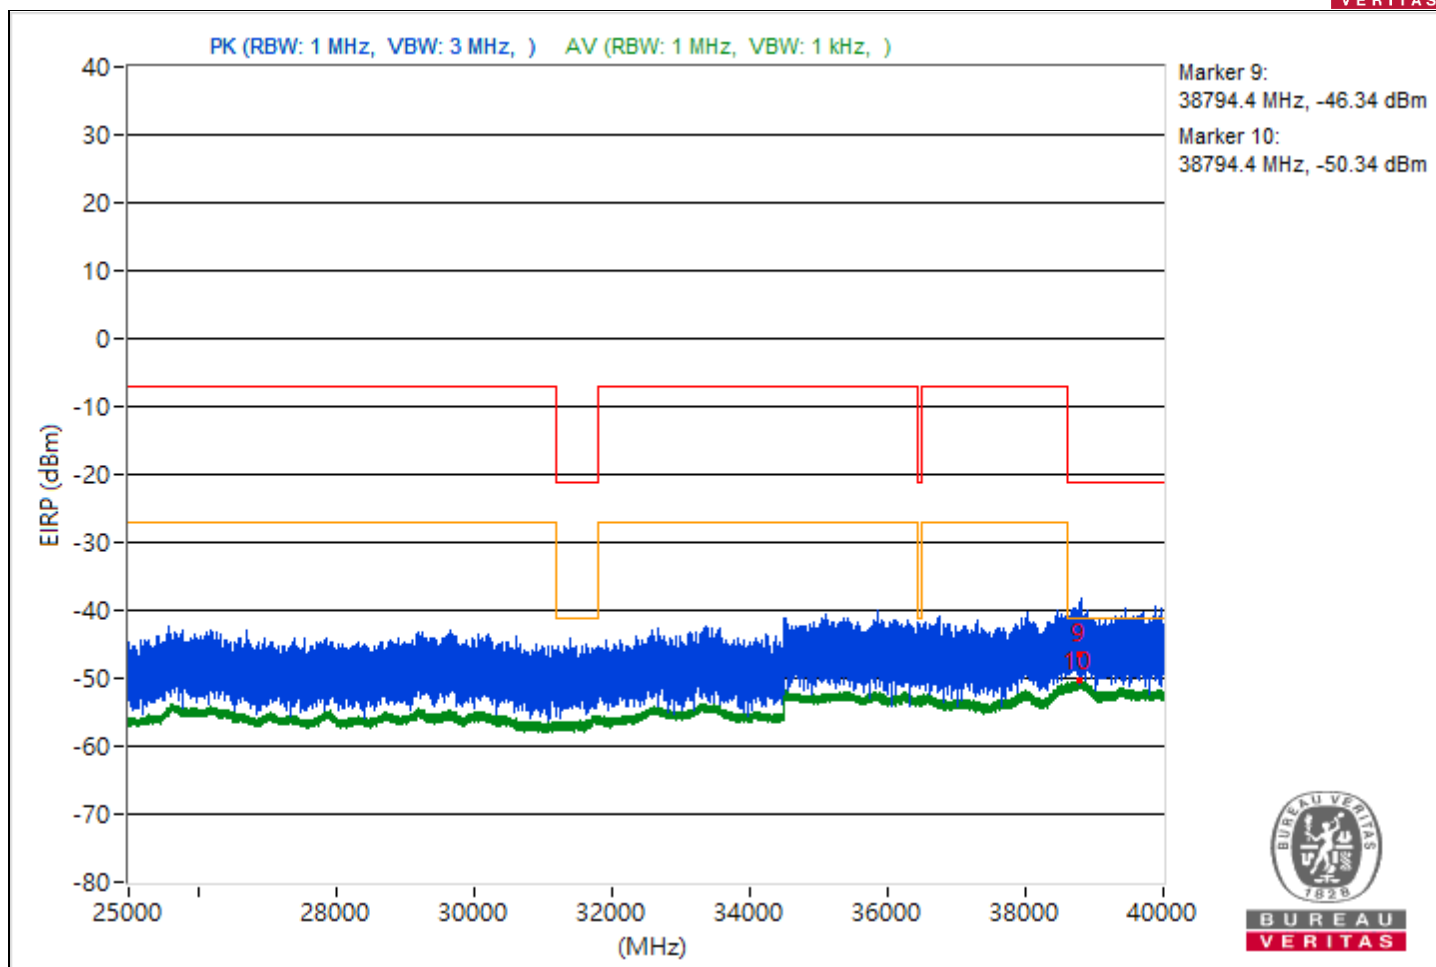


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.5	54.82 PK	74	-19.18	-48.81	8.37	-40.44
2	3817.5	47.67 AV	54	-6.33	-55.96	8.37	-47.59
3	11454.31	54.16 PK	74	-19.84	-49.47	8.37	-41.1
4	11454.31	46.21 AV	54	-7.79	-57.42	8.37	-49.05
5	19211.4	56.77 PK	74	-17.23	-46.86	8.37	-38.49
6	19211.4	48.39 AV	54	-5.61	-55.24	8.37	-46.87
7	22225.5	54.12 PK	74	-19.88	-49.51	8.37	-41.14
8	22225.5	50 AV	54	-4	-53.63	8.37	-45.26
9	38860.27	51.57 PK	74	-22.43	-52.06	8.37	-43.69
10	38860.27	43.27 AV	54	-10.73	-60.36	8.37	-51.99

Note: Margin value = Emission Level - Limit value

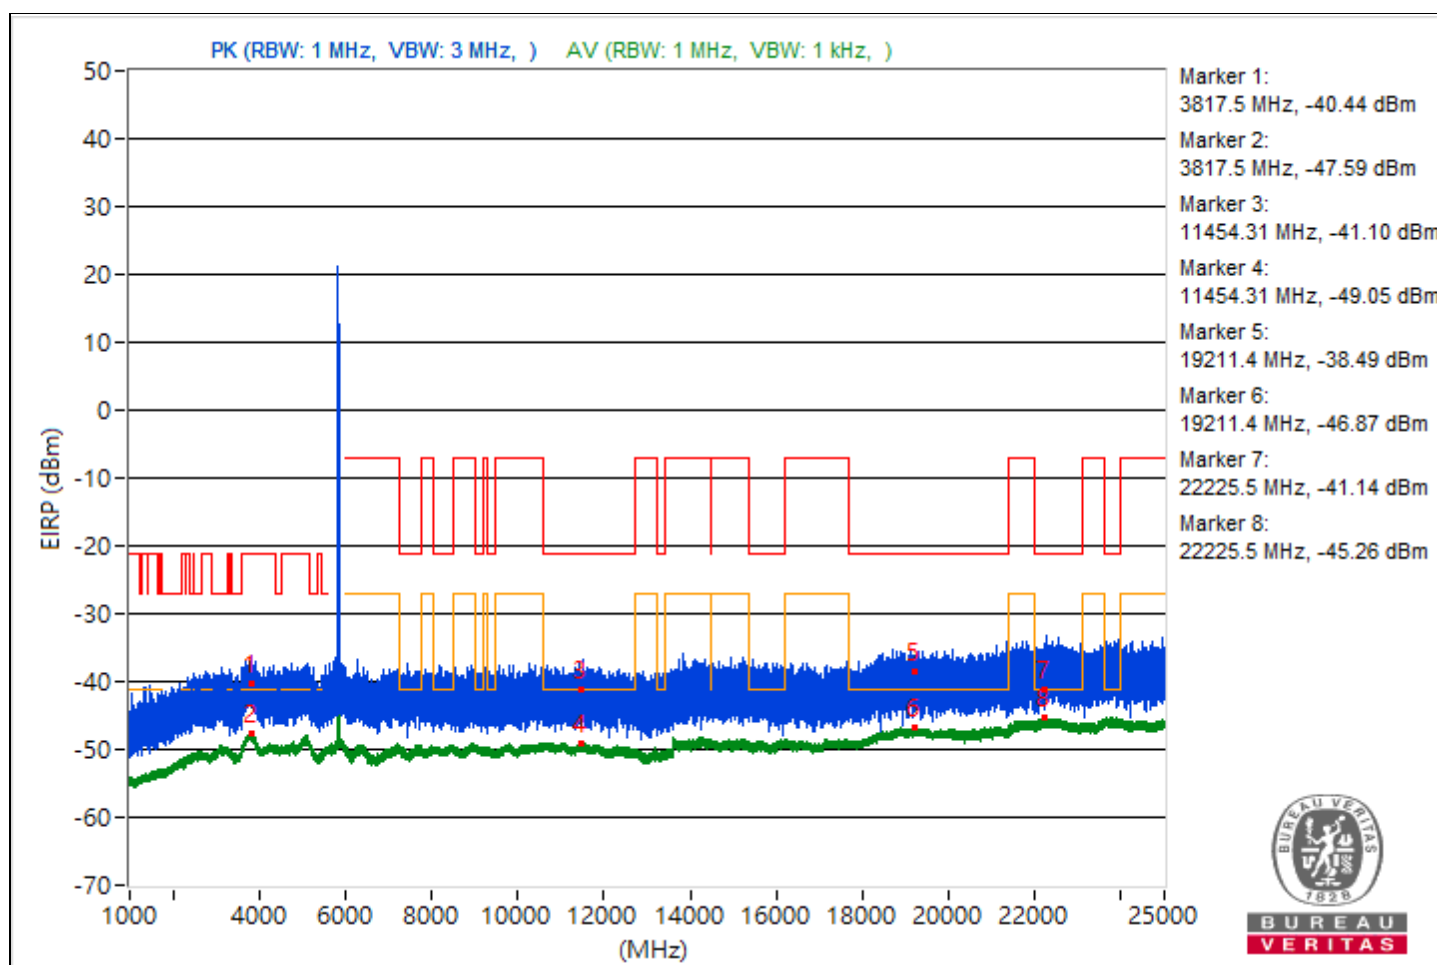


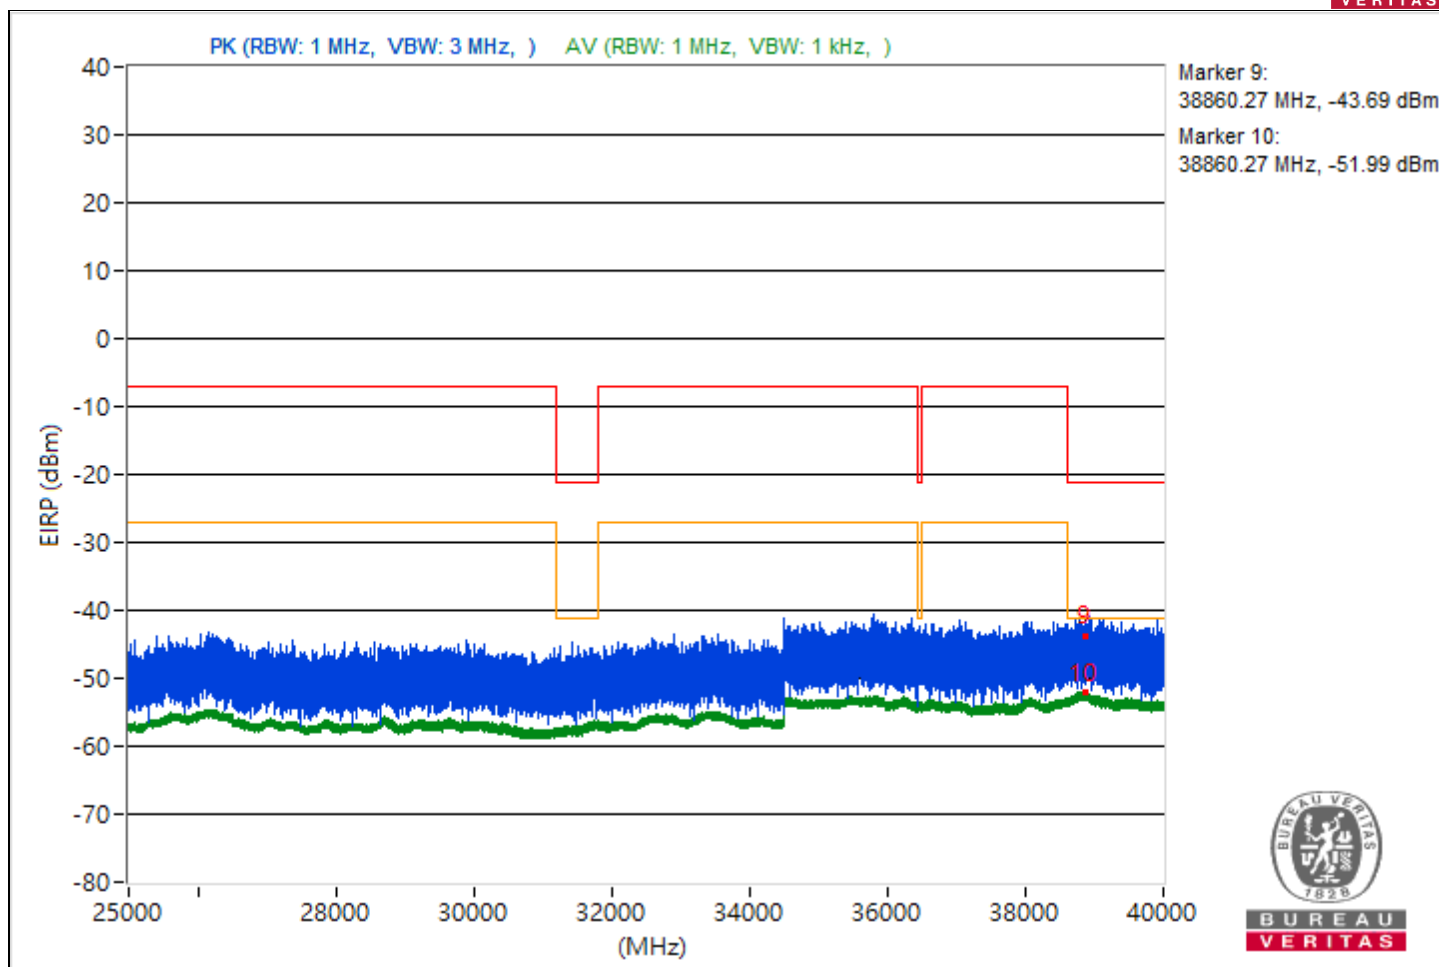


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3823.64	53.5 PK	74	-20.5	-50.13	8.37	-41.76
2	3823.64	47.86 AV	54	-6.14	-55.77	8.37	-47.4
3	11055.2	49.12 PK	74	-24.88	-54.51	8.37	-46.14
4	11055.2	46.24 AV	54	-7.76	-57.39	8.37	-49.02
5	19239	56.92 PK	74	-17.08	-46.71	8.37	-38.34
6	19239	48.58 AV	54	-5.42	-55.05	8.37	-46.68
7	23943.8	58.01 PK	74	-15.99	-45.62	8.37	-37.25
8	23943.8	50.01 AV	54	-3.99	-53.62	8.37	-45.25
9	38887.73	49.72 PK	74	-24.28	-53.91	8.37	-45.54
10	38887.73	43.37 AV	54	-10.63	-60.26	8.37	-51.89

Note: Margin value = Emission Level - Limit value

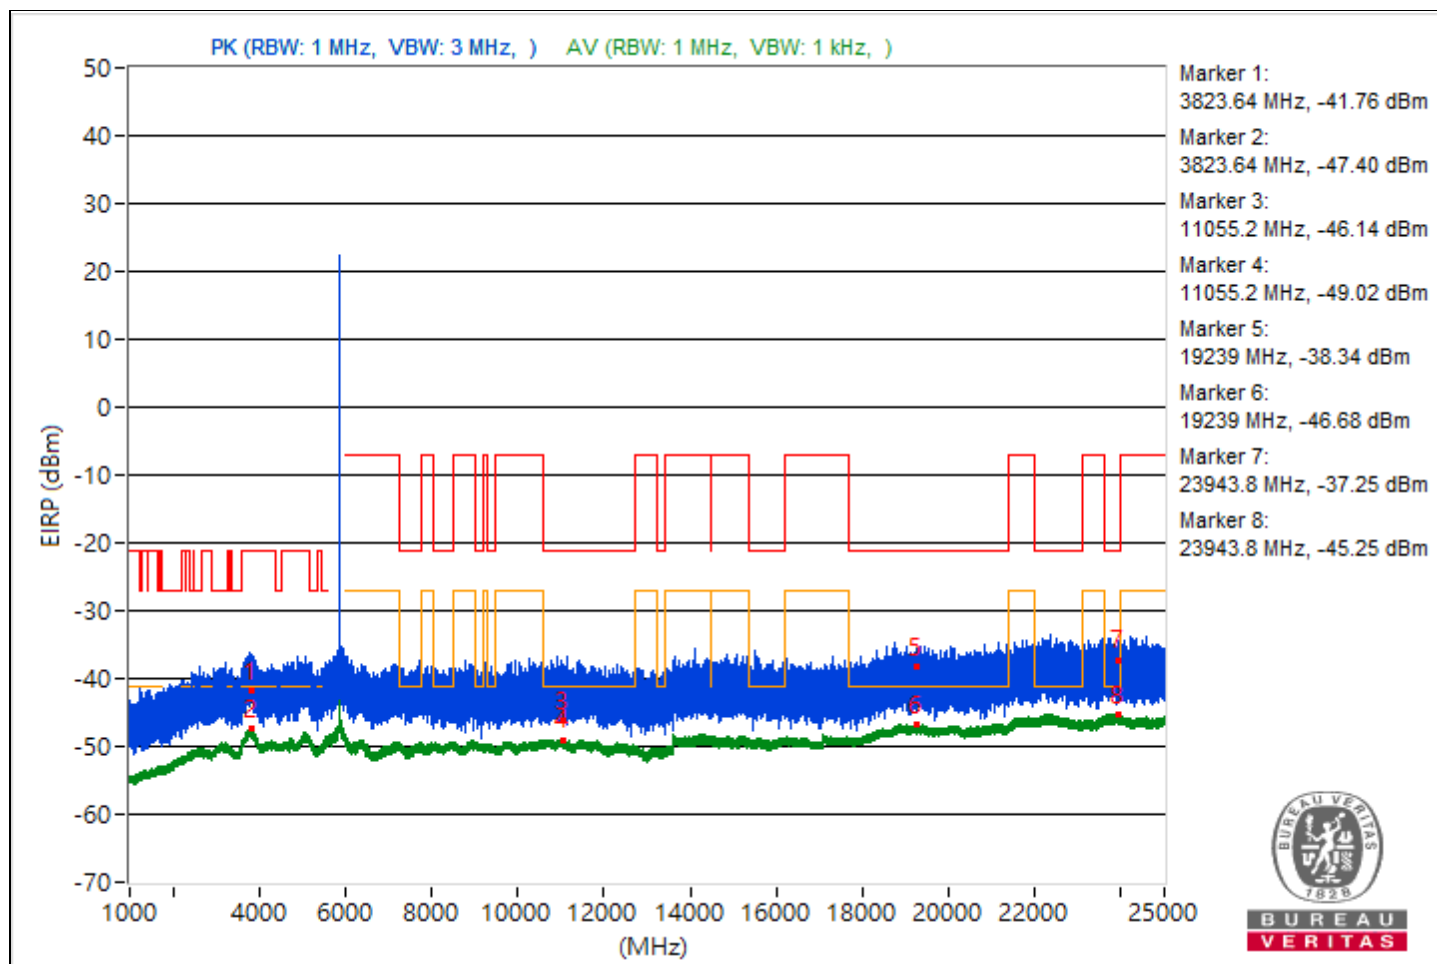


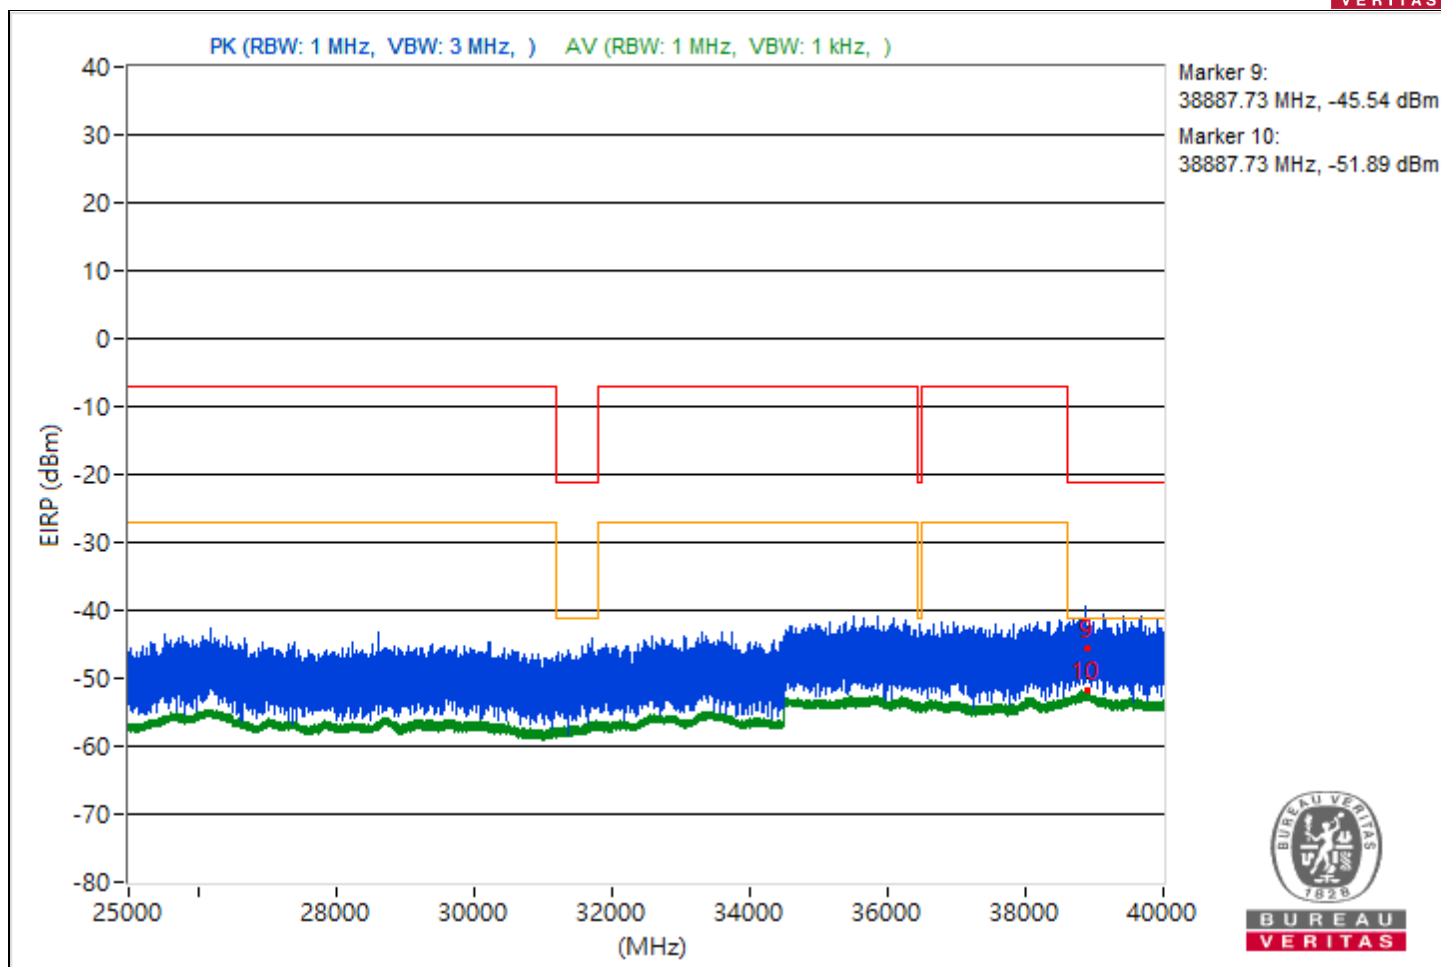


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3826.76	55.72 PK	74	-18.28	-47.91	8.37	-39.54
2	3826.76	48.39 AV	54	-5.61	-55.24	8.37	-46.87
3	9000.27	54.48 PK	74	-19.52	-49.15	8.37	-40.78
4	9000.27	46.73 AV	54	-7.27	-56.9	8.37	-48.53
5	19427.1	54.04 PK	74	-19.96	-49.59	8.37	-41.22
6	19427.1	49.45 AV	54	-4.55	-54.18	8.37	-45.81
7	23878.7	56.27 PK	74	-17.73	-47.36	8.37	-38.99
8	23878.7	51.13 AV	54	-2.87	-52.5	8.37	-44.13
9	38789.6	51.22 PK	74	-22.78	-52.41	8.37	-44.04
10	38789.6	45.11 AV	54	-8.89	-58.52	8.37	-50.15

Note: Margin value = Emission Level - Limit value

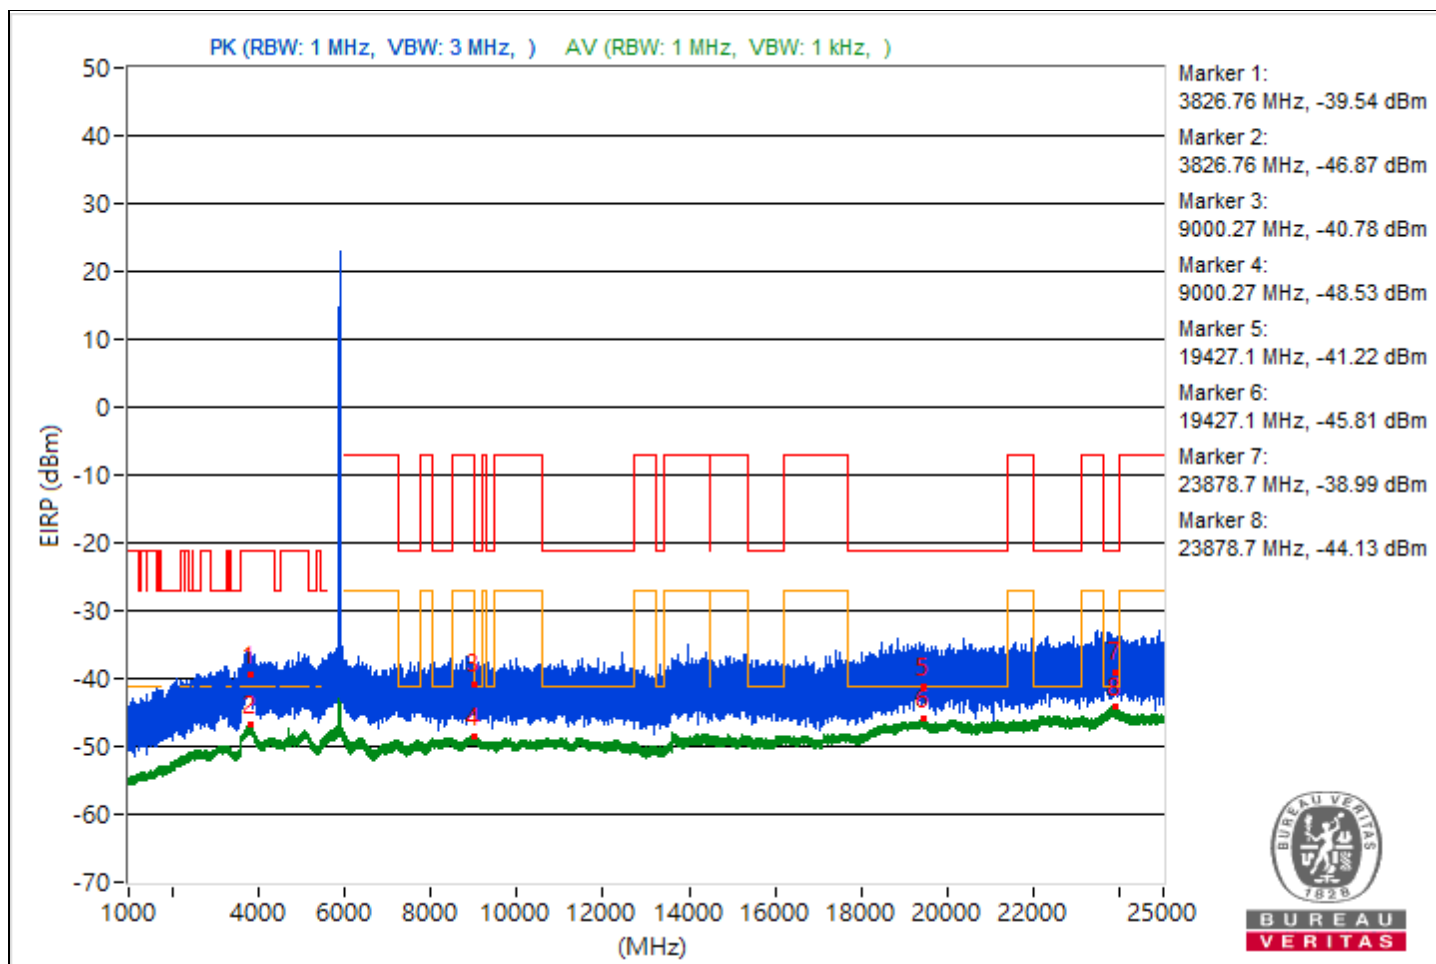


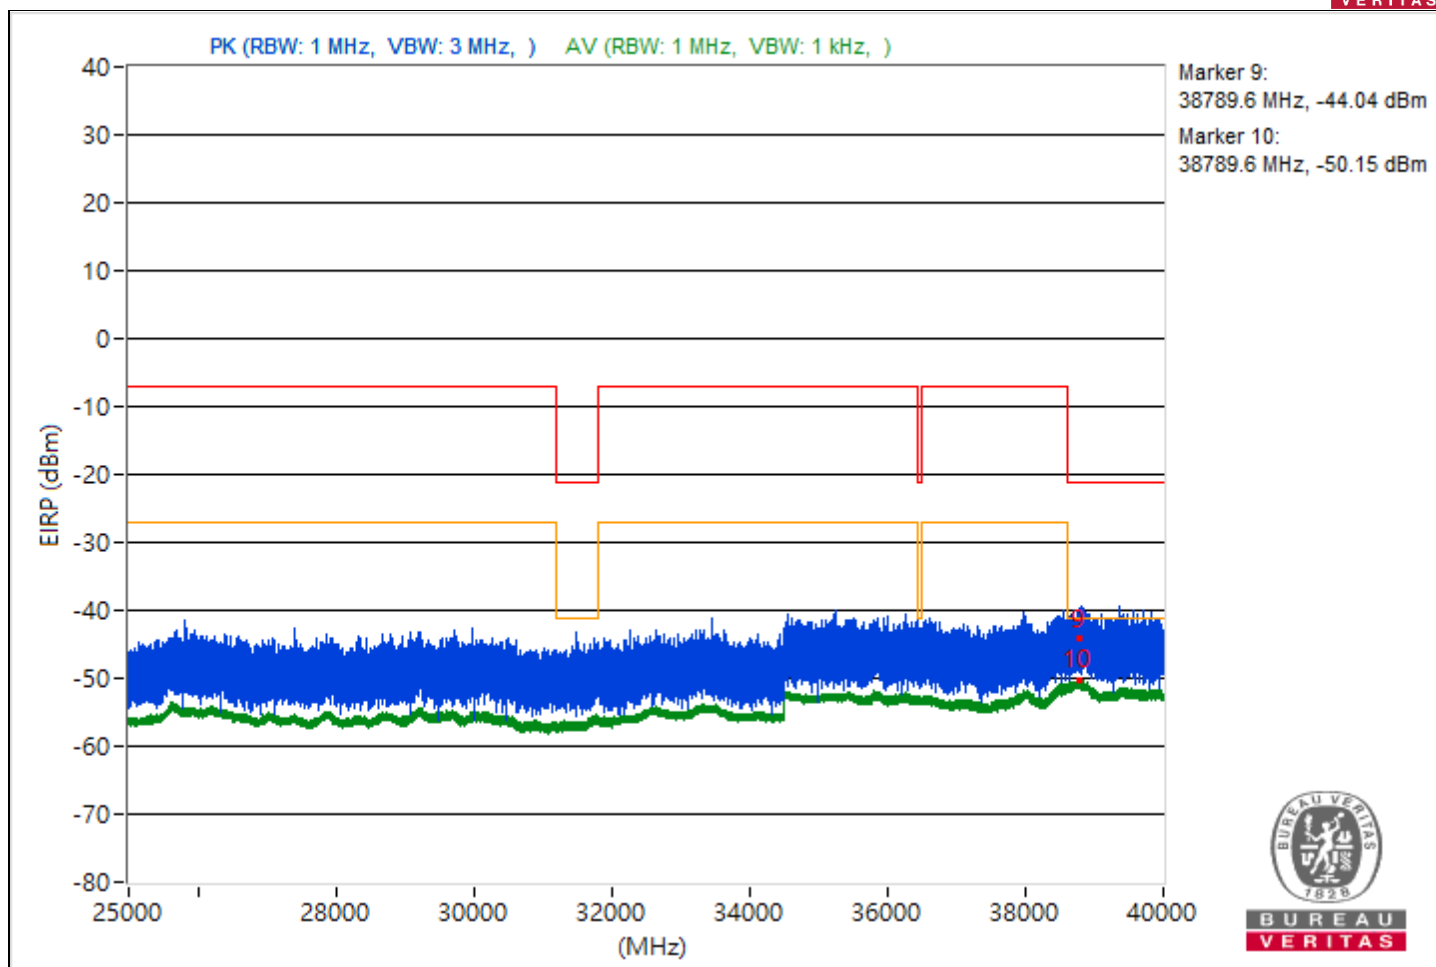


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3788.8	53.48 PK	74	-20.52	-50.15	8.37	-41.78
2	3788.8	47.83 AV	54	-6.17	-55.8	8.37	-47.43
3	11443.64	53.83 PK	74	-20.17	-49.8	8.37	-41.43
4	11443.64	46.29 AV	54	-7.71	-57.34	8.37	-48.97
5	19297.2	54.54 PK	74	-19.46	-49.09	8.37	-40.72
6	19297.2	48.42 AV	54	-5.58	-55.21	8.37	-46.84
7	23714.2	58.51 PK	74	-15.49	-45.12	8.37	-36.75
8	23714.2	50.08 AV	54	-3.92	-53.55	8.37	-45.18
9	38846.93	50.94 PK	74	-23.06	-52.69	8.37	-44.32
10	38846.93	43.39 AV	54	-10.61	-60.24	8.37	-51.87

Note: Margin value = Emission Level - Limit value

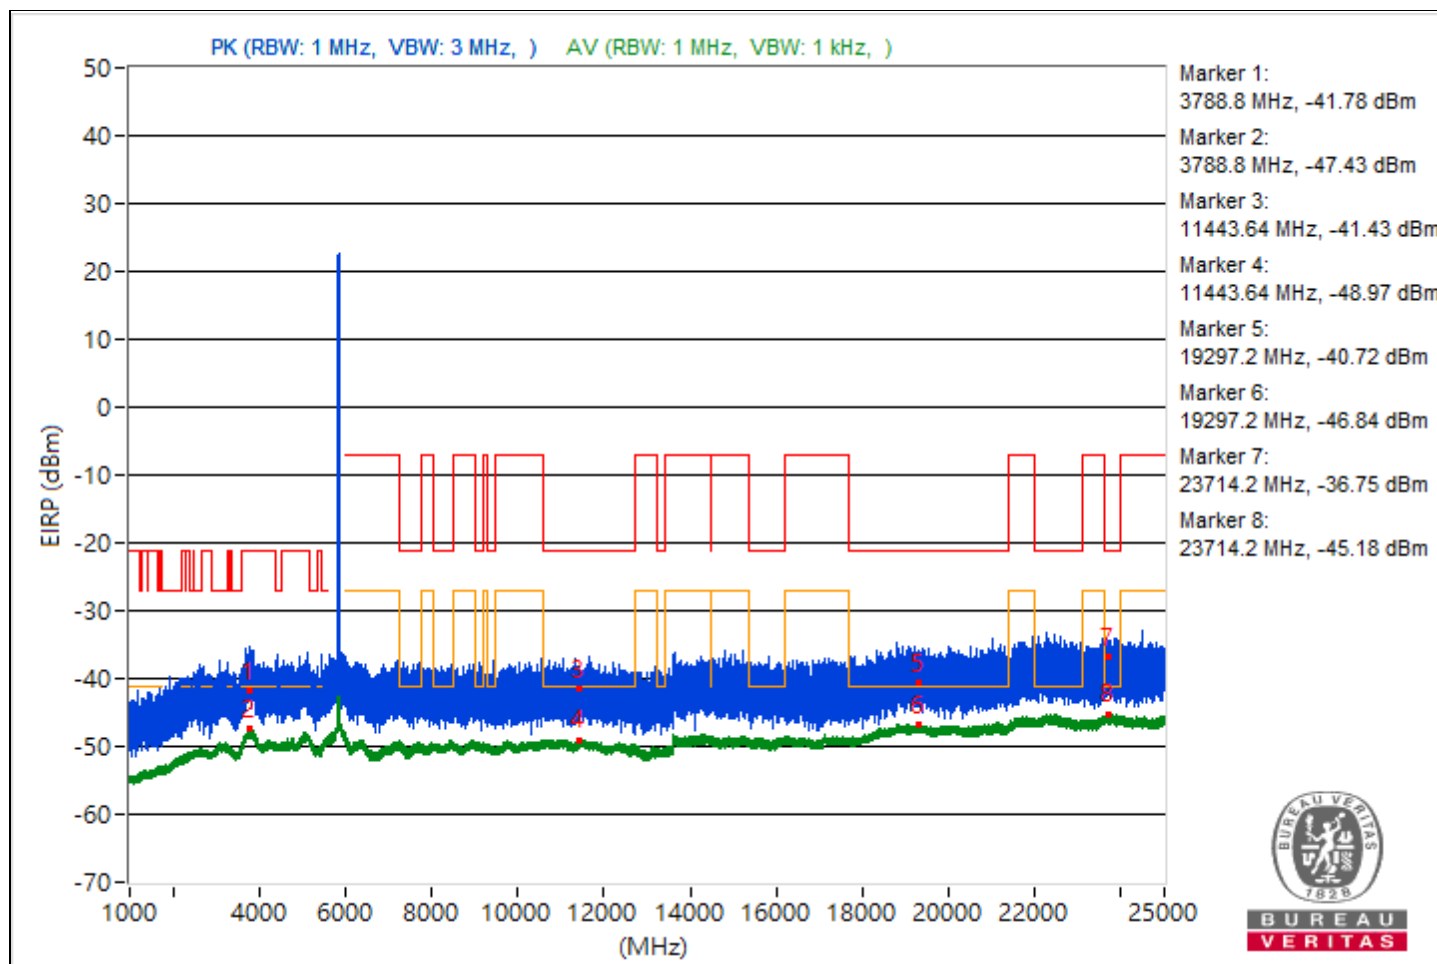


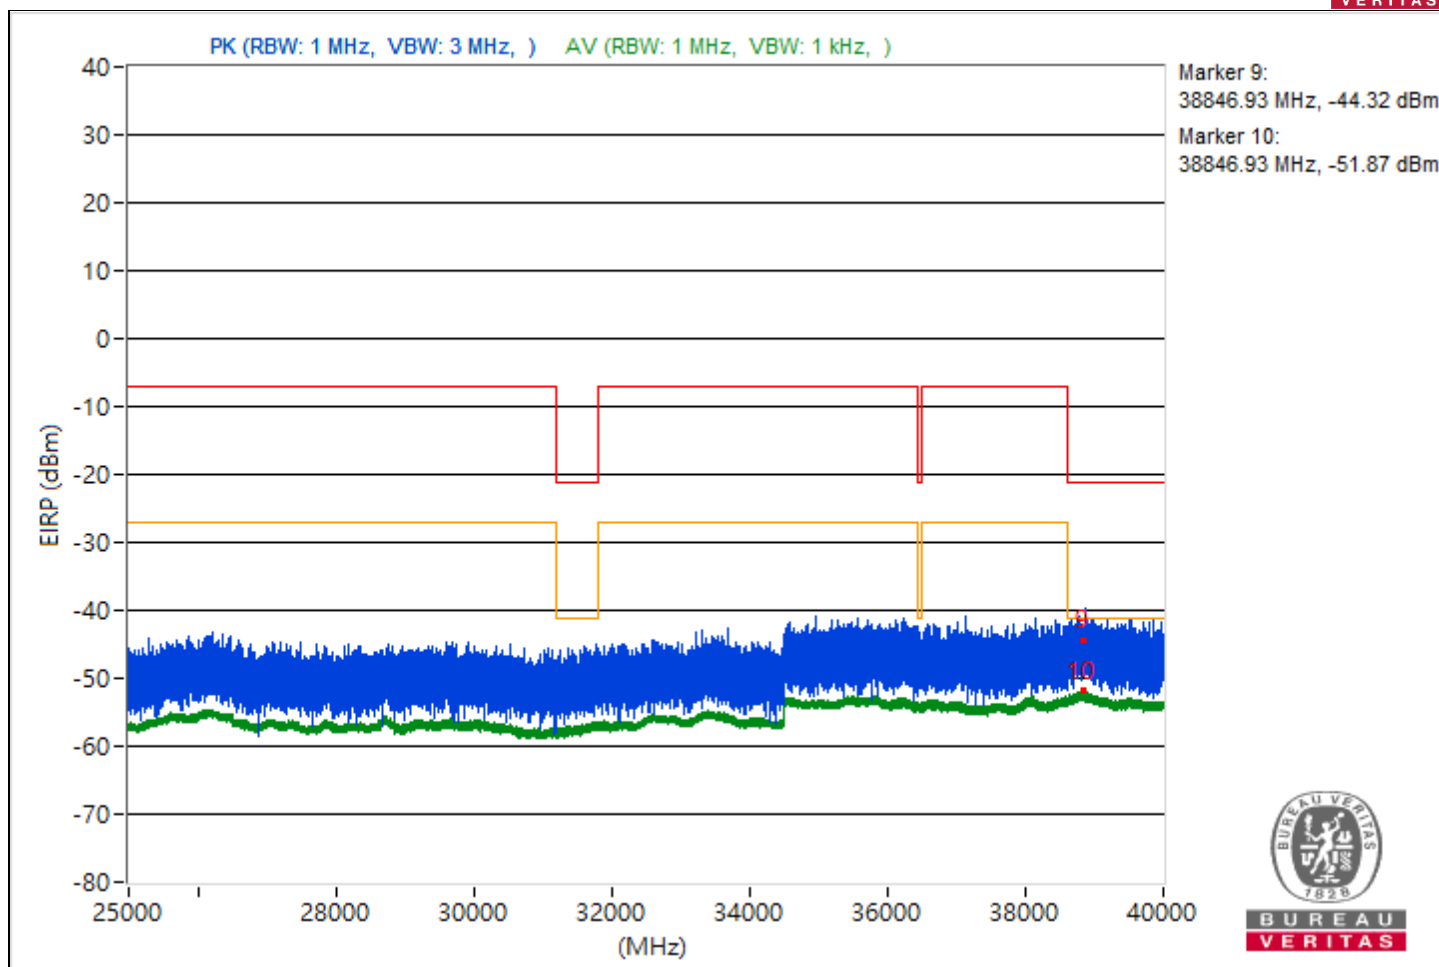


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.63	55.86 PK	74	-18.14	-47.77	8.37	-39.4
2	3808.63	47.77 AV	54	-6.23	-55.86	8.37	-47.49
3	11059.02	52.06 PK	74	-21.94	-51.57	8.37	-43.2
4	11059.02	46.33 AV	54	-7.67	-57.3	8.37	-48.93
5	19000.3	57.38 PK	74	-16.62	-46.25	8.37	-37.88
6	19000.3	48.44 AV	54	-5.56	-55.19	8.37	-46.82
7	23704.7	56.13 PK	74	-17.87	-47.5	8.37	-39.13
8	23704.7	49.99 AV	54	-4.01	-53.64	8.37	-45.27
9	38830.84	50.6 PK	74	-23.4	-53.03	8.37	-44.66
10	38830.84	43.61 AV	54	-10.39	-60.02	8.37	-51.65

Note: Margin value = Emission Level - Limit value

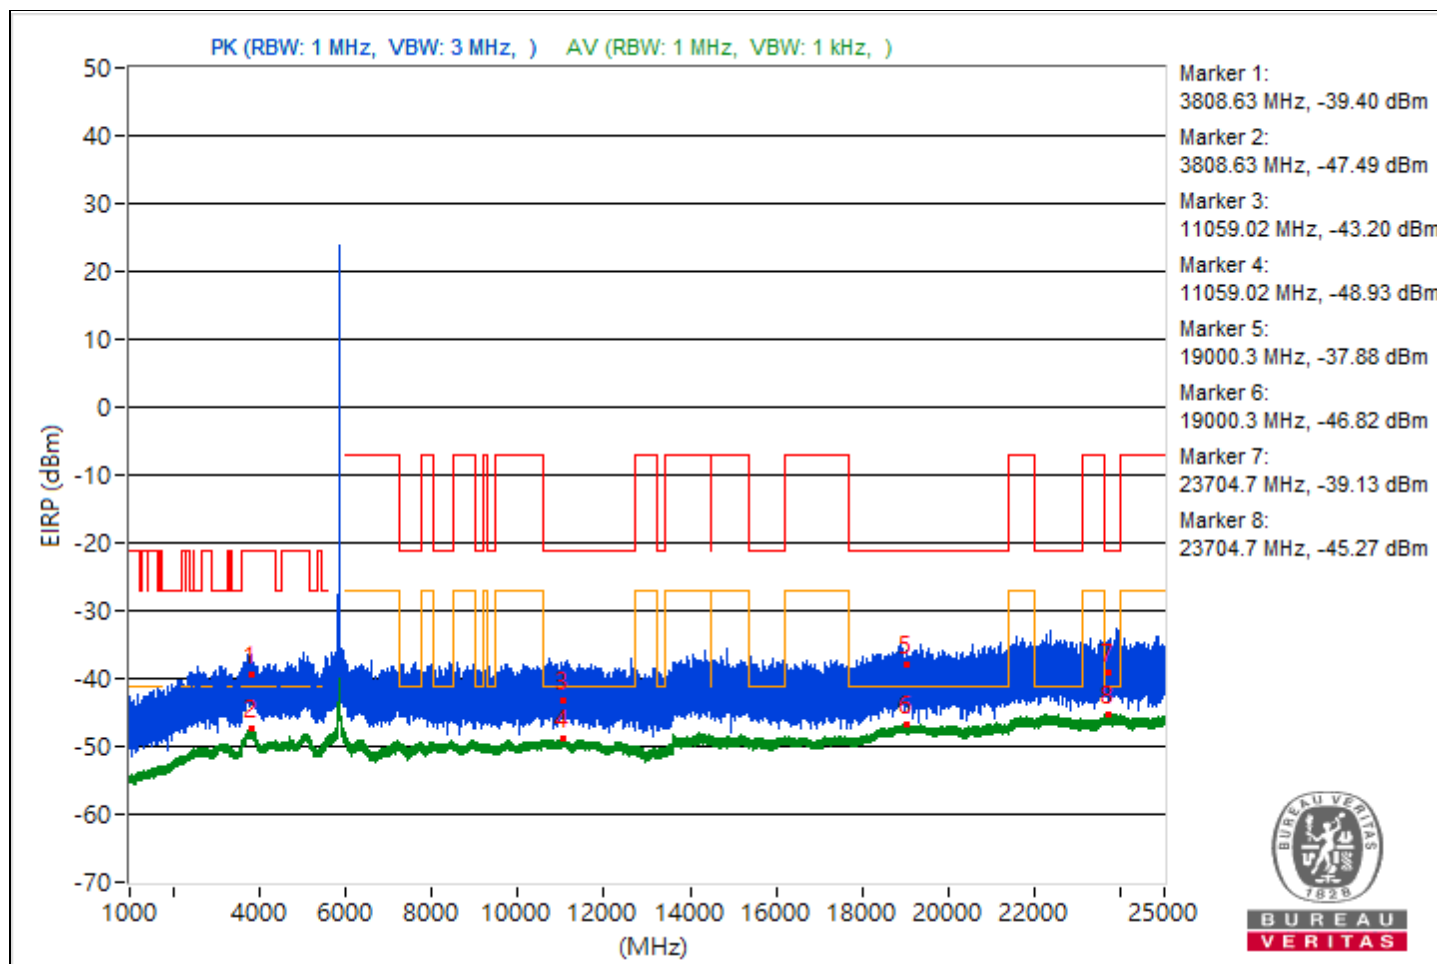


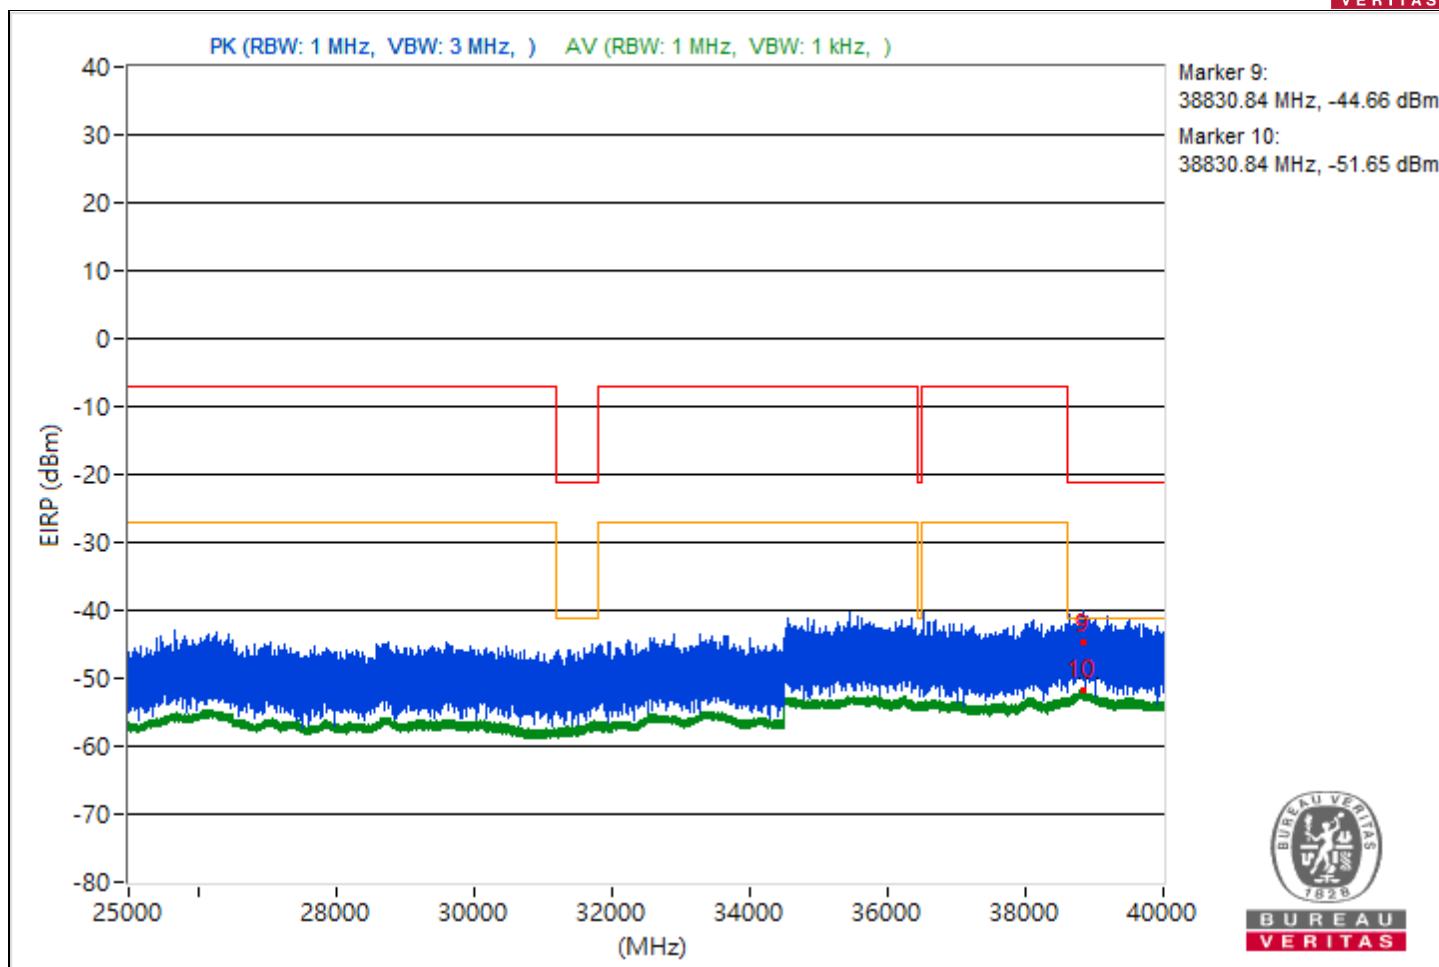


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4707.9	54.23 PK	74	-19.77	-49.4	8.37	-41.03
2	4707.9	48.24 AV	54	-5.76	-55.39	8.37	-47.02
3	9019.02	53.24 PK	74	-20.76	-50.39	8.37	-42.02
4	9019.02	46.74 AV	54	-7.26	-56.89	8.37	-48.52
5	19374.7	55.95 PK	74	-18.05	-47.68	8.37	-39.31
6	19374.7	49.11 AV	54	-4.89	-54.52	8.37	-46.15
7	23787.5	56.75 PK	74	-17.25	-46.88	8.37	-38.51
8	23787.5	50.82 AV	54	-3.18	-52.81	8.37	-44.44
9	38743.56	51.69 PK	74	-22.31	-51.94	8.37	-43.57
10	38743.56	44.97 AV	54	-9.03	-58.66	8.37	-50.29

Note: Margin value = Emission Level - Limit value

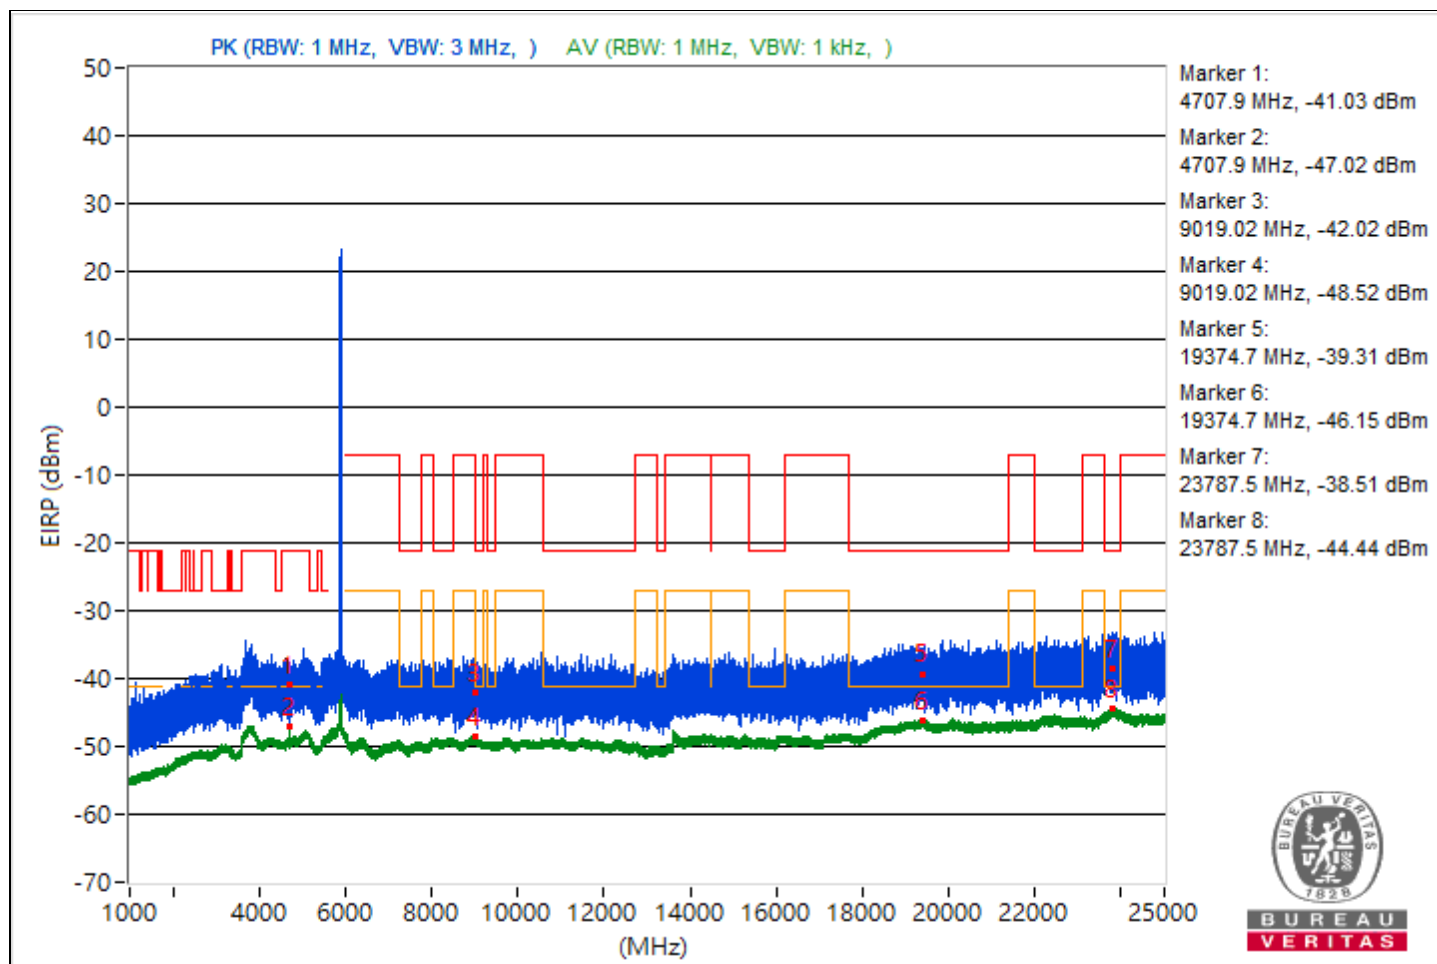

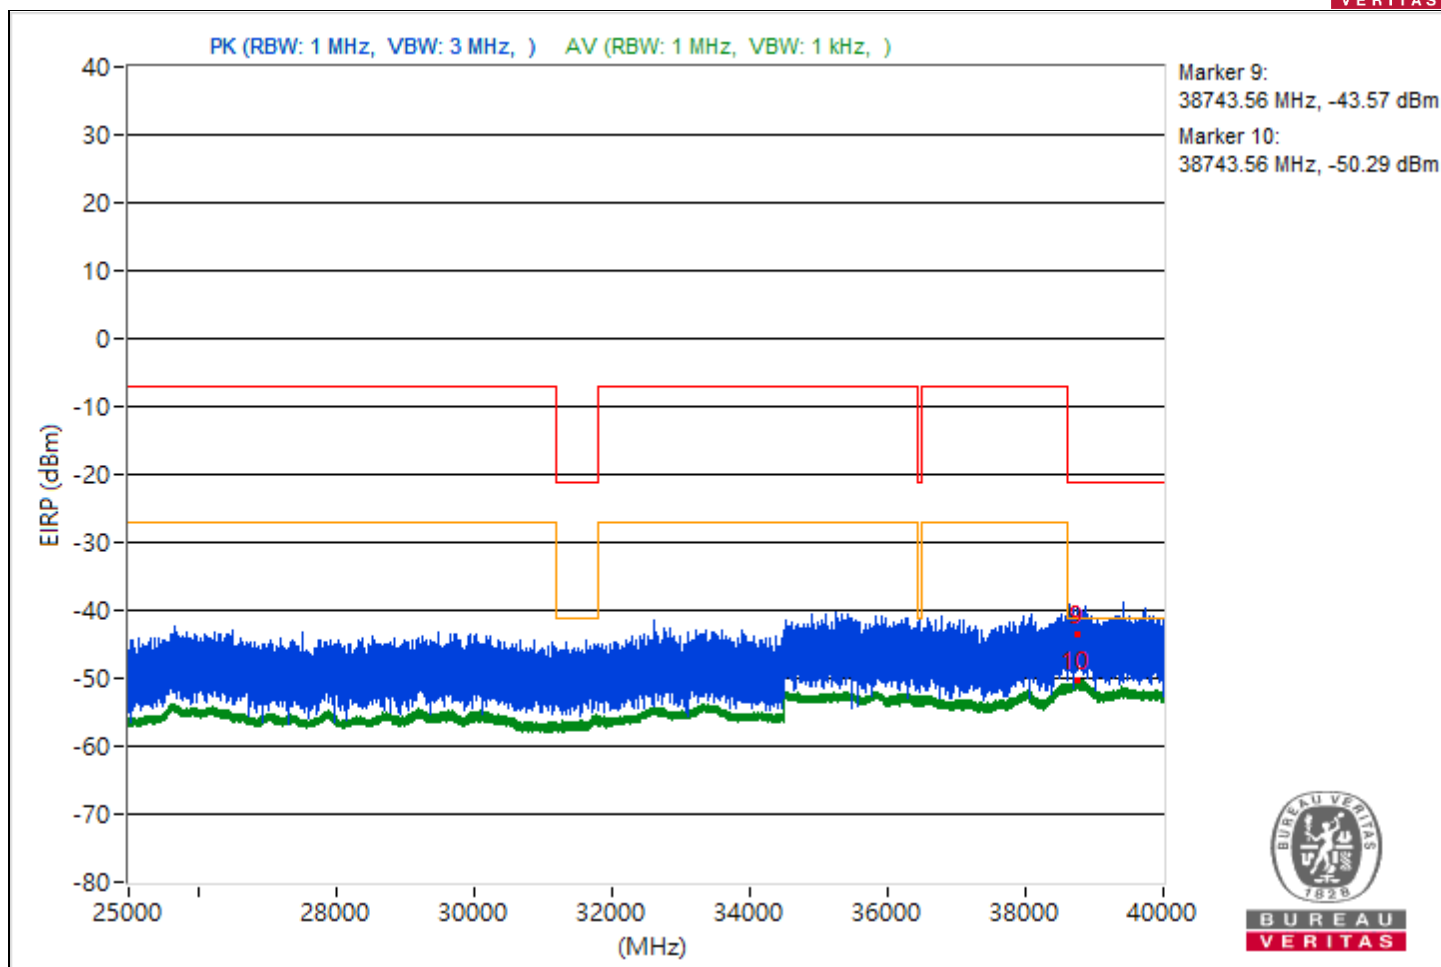



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.31	55.2 PK	74	-18.8	-48.43	8.37	-40.06
2	3807.31	47.69 AV	54	-6.31	-55.94	8.37	-47.57
3	10652.71	53.54 PK	74	-20.46	-50.09	8.37	-41.72
4	10652.71	46.31 AV	54	-7.69	-57.32	8.37	-48.95
5	19141.1	56.78 PK	74	-17.22	-46.85	8.37	-38.48
6	19141.1	48.32 AV	54	-5.68	-55.31	8.37	-46.94
7	22218.4	54.7 PK	74	-19.3	-48.93	8.37	-40.56
8	22218.4	49.99 AV	54	-4.01	-53.64	8.37	-45.27
9	38855.2	50.85 PK	74	-23.15	-52.78	8.37	-44.41
10	38855.2	43.23 AV	54	-10.77	-60.4	8.37	-52.03

Note: Margin value = Emission Level - Limit value

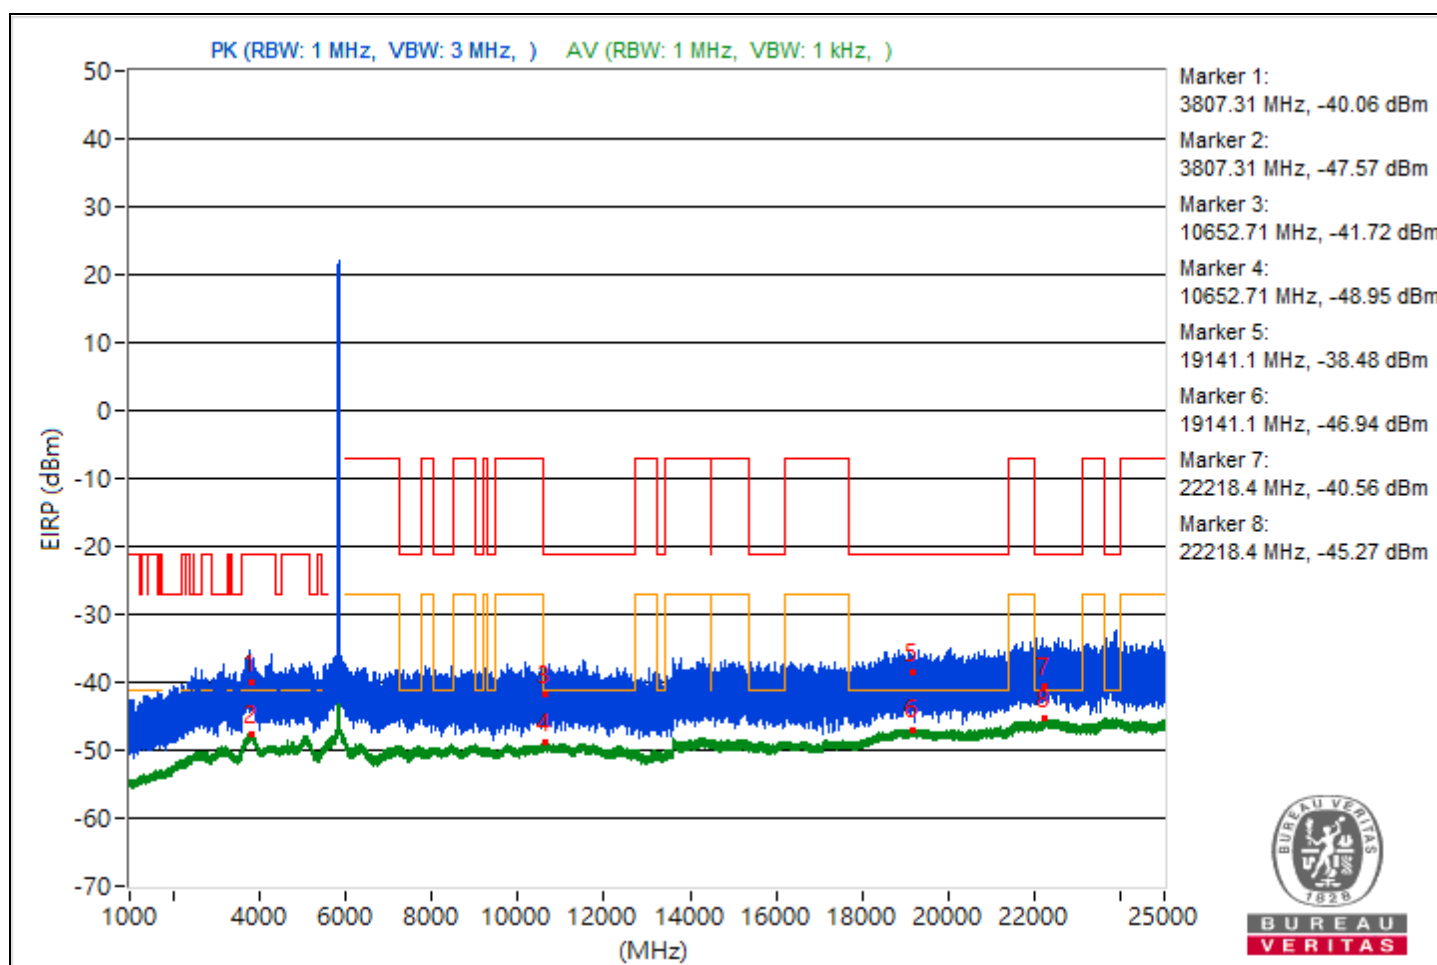

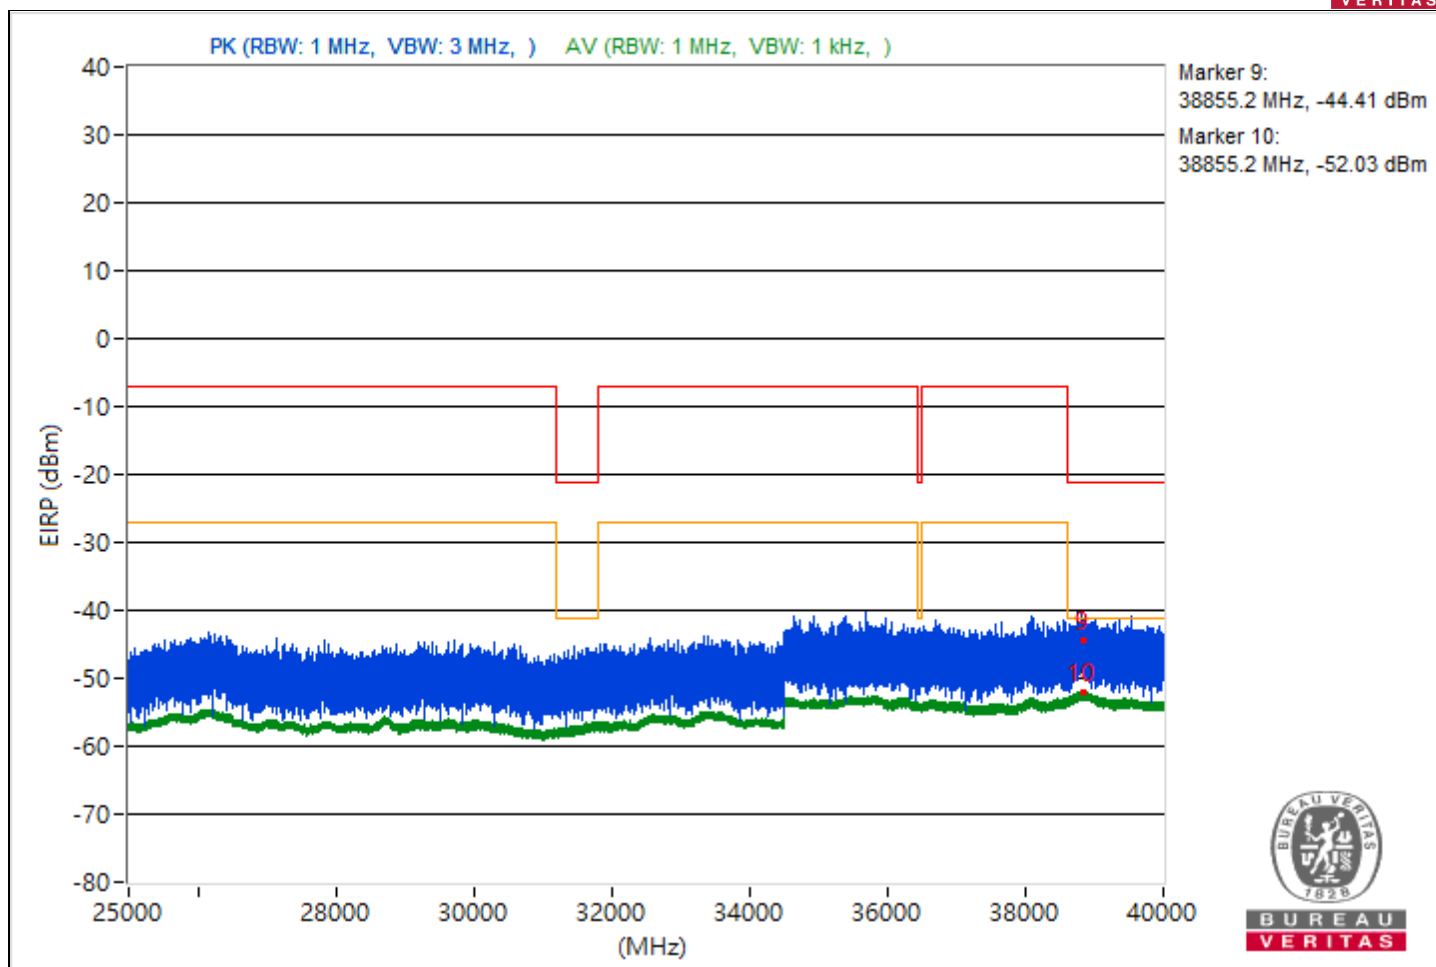



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.04	55.07 PK	74	-18.93	-48.56	8.37	-40.19
2	3811.04	47.79 AV	54	-6.21	-55.84	8.37	-47.47
3	10784.8	53.47 PK	74	-20.53	-50.16	8.37	-41.79
4	10784.8	46.29 AV	54	-7.71	-57.34	8.37	-48.97
5	19377.3	55.97 PK	74	-18.03	-47.66	8.37	-39.29
6	19377.3	48.44 AV	54	-5.56	-55.19	8.37	-46.82
7	23716.1	59.42 PK	74	-14.58	-44.21	8.37	-35.84
8	23716.1	49.9 AV	54	-4.1	-53.73	8.37	-45.36
9	38822.67	49.41 PK	74	-24.59	-54.22	8.37	-45.85
10	38822.67	43.44 AV	54	-10.56	-60.19	8.37	-51.82

Note: Margin value = Emission Level - Limit value

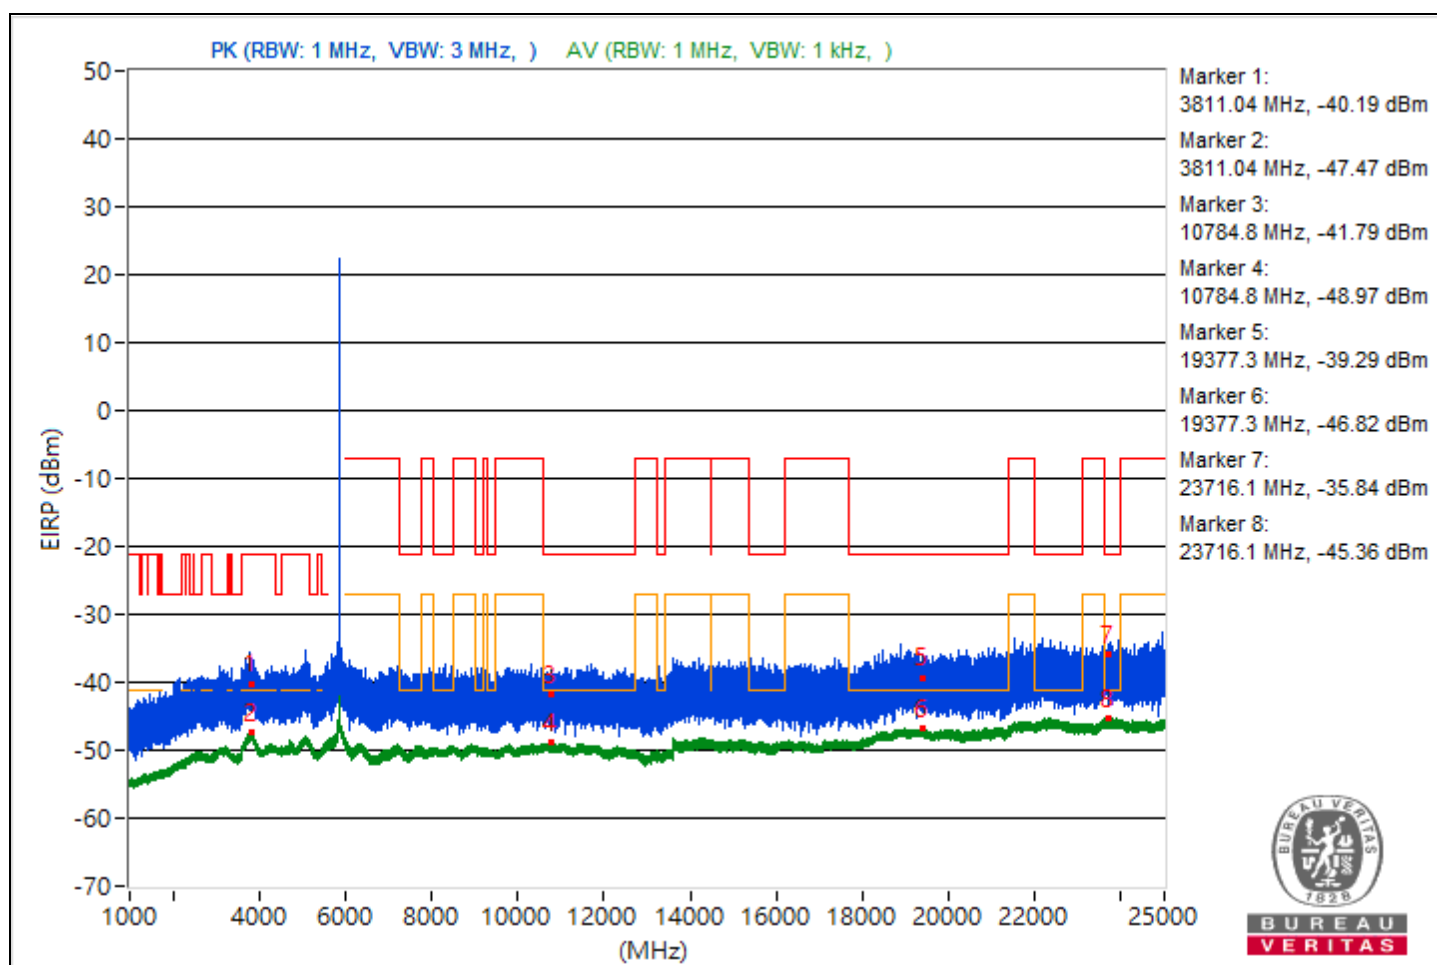


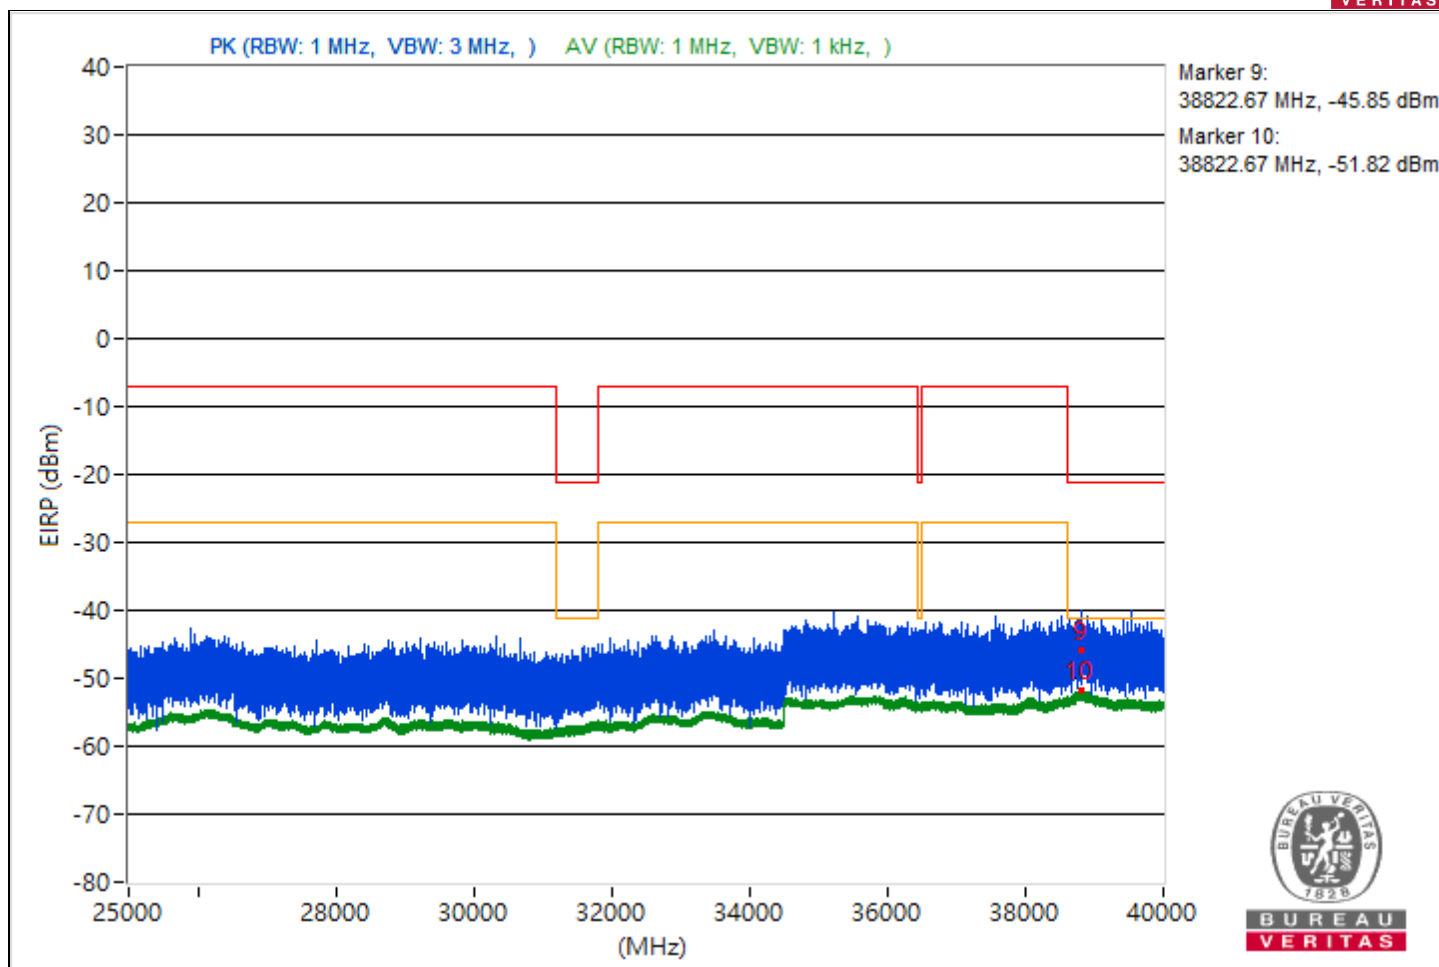


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3822.4	57.59 PK	74	-16.41	-46.04	8.37	-37.67
2	3822.4	47.83 AV	54	-6.17	-55.8	8.37	-47.43
3	11049.6	52.6 PK	74	-21.4	-51.03	8.37	-42.66
4	11049.6	46.28 AV	54	-7.72	-57.35	8.37	-48.98
5	19140	54.91 PK	74	-19.09	-48.72	8.37	-40.35
6	19140	48.37 AV	54	-5.63	-55.26	8.37	-46.89
7	22375.9	54.24 PK	74	-19.76	-49.39	8.37	-41.02
8	22375.9	49.7 AV	54	-4.3	-53.93	8.37	-45.56
9	38818.22	45.09 PK	74	-28.91	-58.54	8.37	-50.17
10	38818.22	43.37 AV	54	-10.63	-60.26	8.37	-51.89

Note: Margin value = Emission Level - Limit value

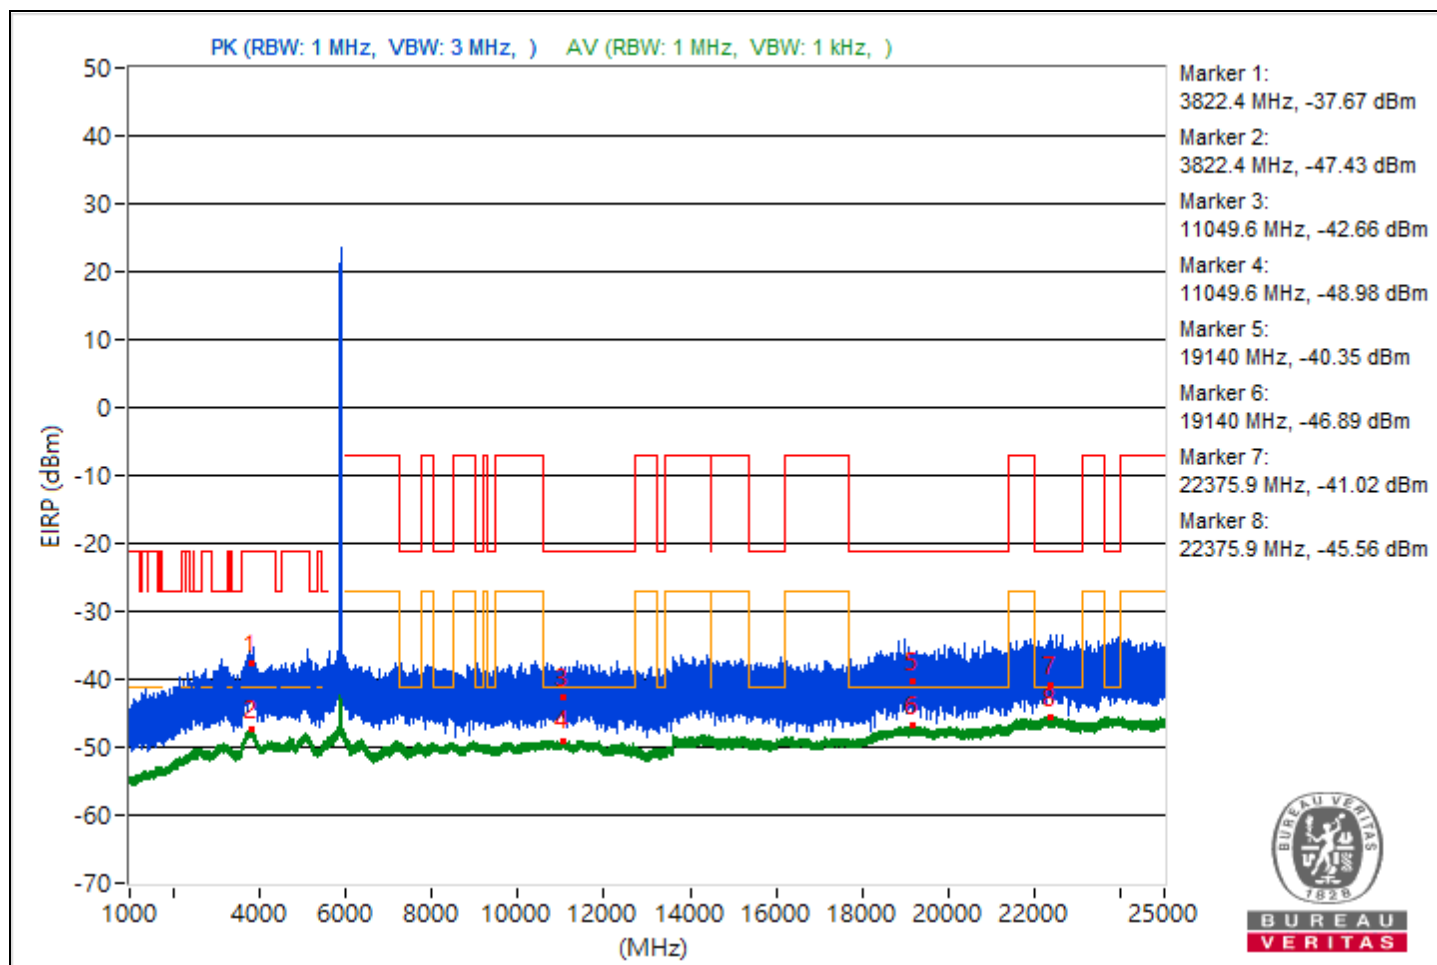

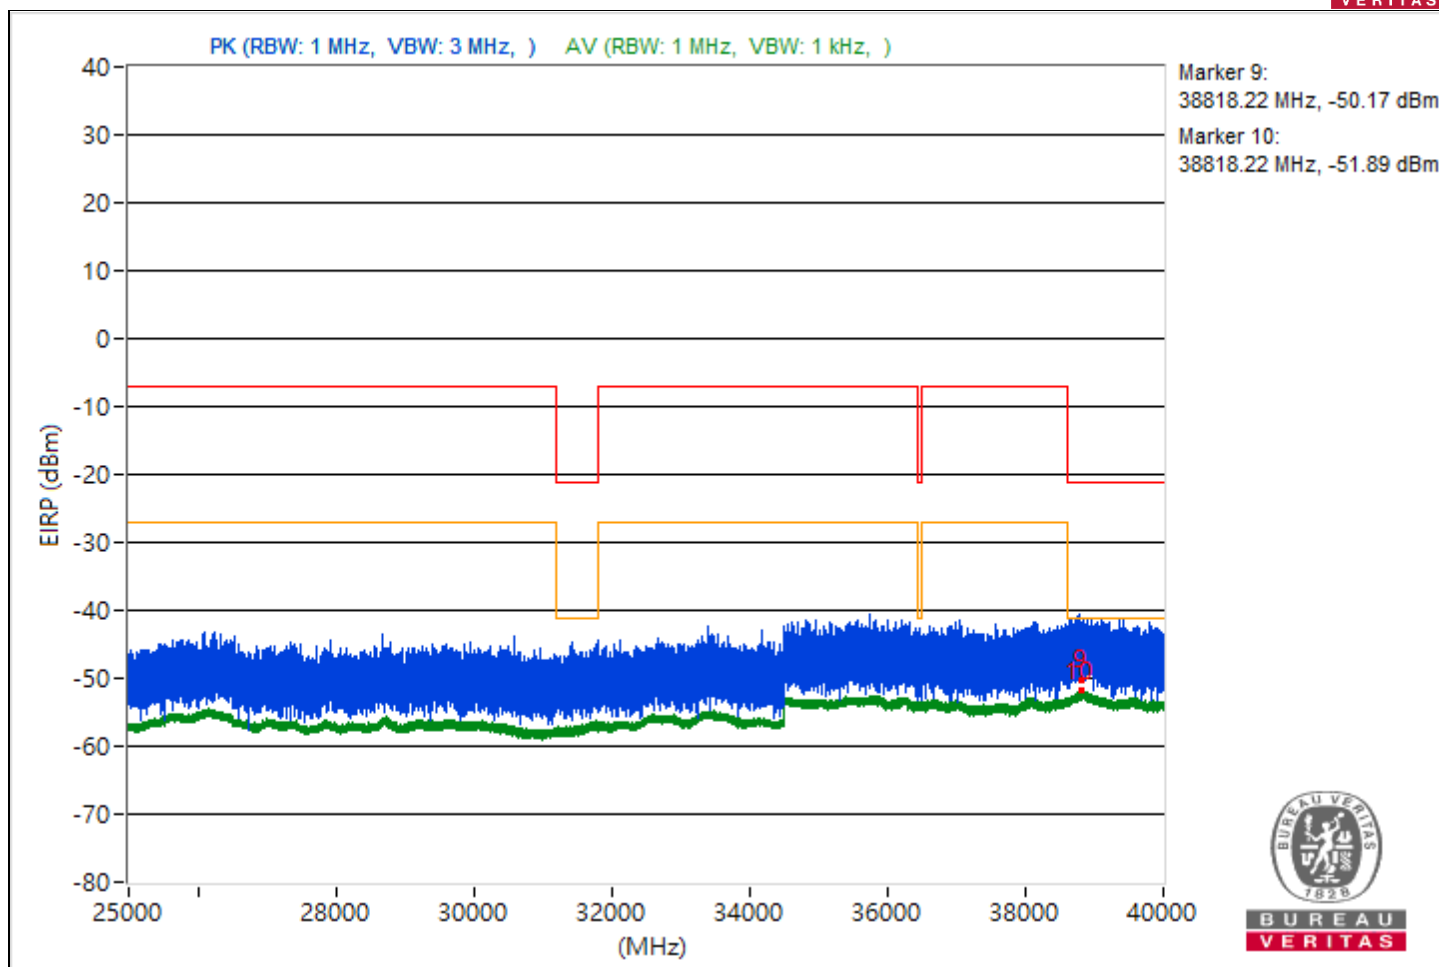



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.64	55.42 PK	74	-18.58	-48.21	8.37	-39.84
2	3809.64	47.79 AV	54	-6.21	-55.84	8.37	-47.47
3	10653.6	54.65 PK	74	-19.35	-48.98	8.37	-40.61
4	10653.6	46.36 AV	54	-7.64	-57.27	8.37	-48.9
5	19109.9	56.2 PK	74	-17.8	-47.43	8.37	-39.06
6	19109.9	48.44 AV	54	-5.56	-55.19	8.37	-46.82
7	22298.1	52.23 PK	74	-21.77	-51.4	8.37	-43.03
8	22298.1	50 AV	54	-4	-53.63	8.37	-45.26
9	38872.62	49.9 PK	74	-24.1	-53.73	8.37	-45.36
10	38872.62	43.43 AV	54	-10.57	-60.2	8.37	-51.83

Note: Margin value = Emission Level - Limit value

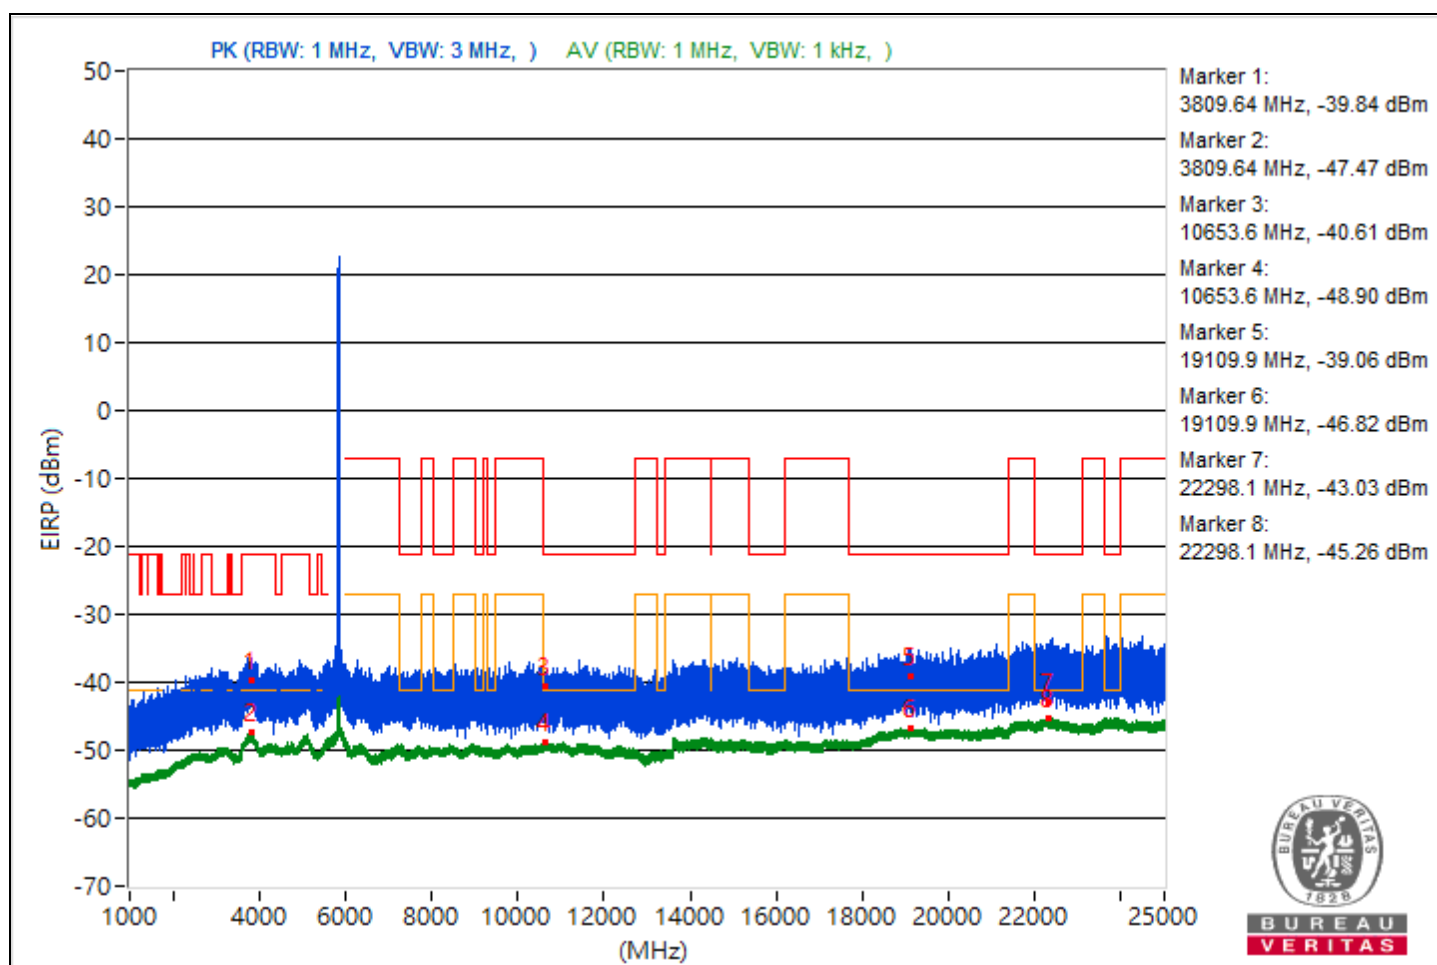

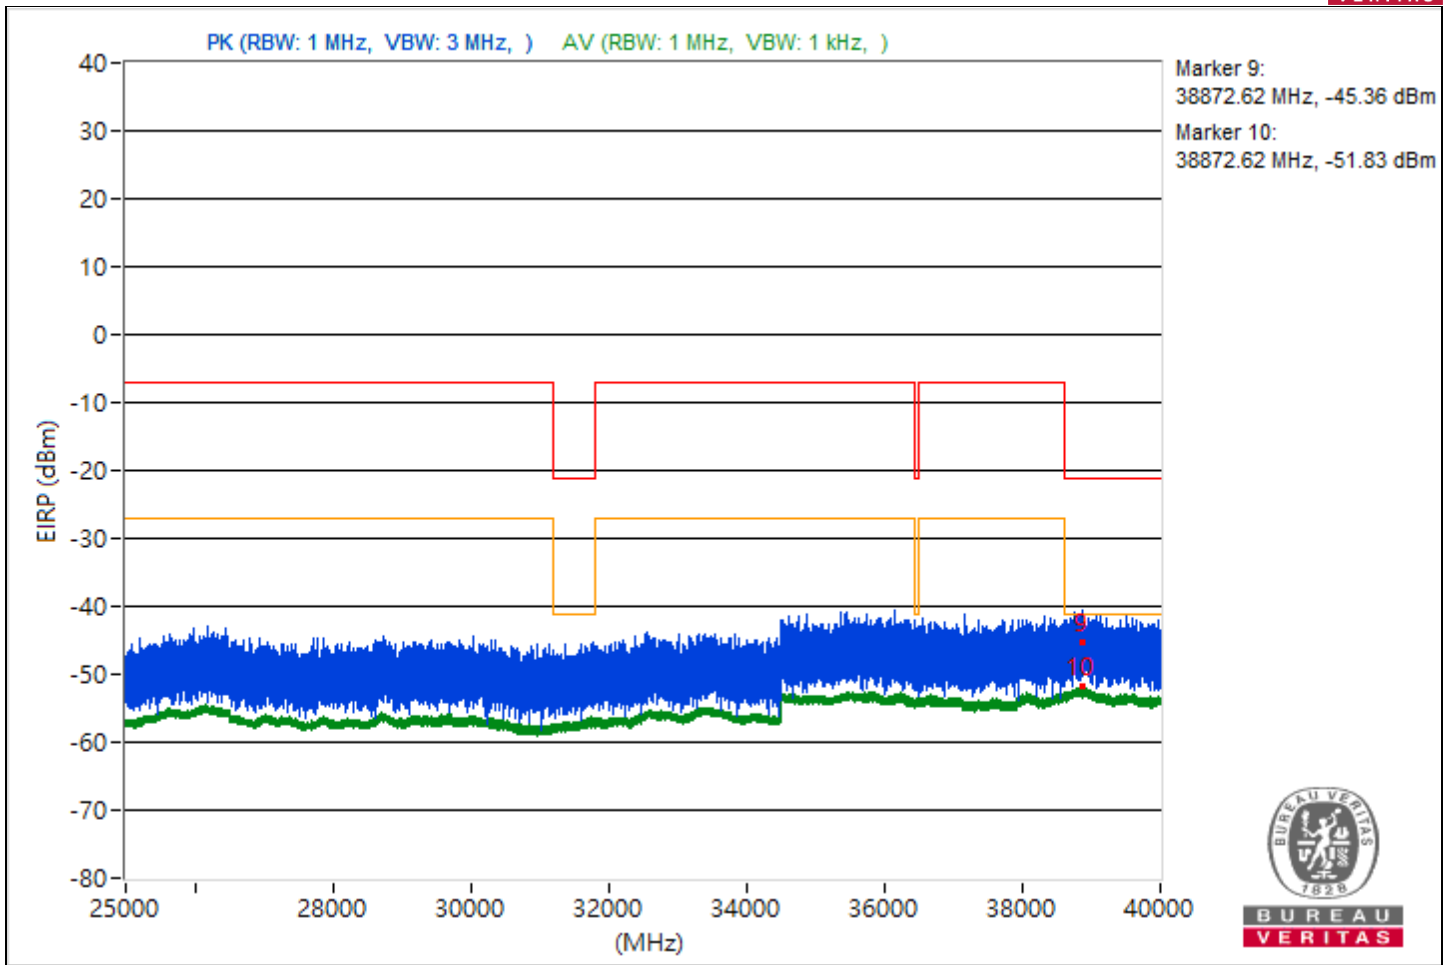



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.99	56.79 PK	74	-17.21	-46.84	8.37	-38.47
2	3791.99	47.7 AV	54	-6.3	-55.93	8.37	-47.56
3	11464.27	51.08 PK	74	-22.92	-52.55	8.37	-44.18
4	11464.27	46.27 AV	54	-7.73	-57.36	8.37	-48.99
5	19408.3	54.32 PK	74	-19.68	-49.31	8.37	-40.94
6	19408.3	48.6 AV	54	-5.4	-55.03	8.37	-46.66
7	23766.7	56.68 PK	74	-17.32	-46.95	8.37	-38.58
8	23766.7	50.01 AV	54	-3.99	-53.62	8.37	-45.25
9	38822.31	48.6 PK	74	-25.4	-55.03	8.37	-46.66
10	38822.31	43.32 AV	54	-10.68	-60.31	8.37	-51.94

Note: Margin value = Emission Level - Limit value

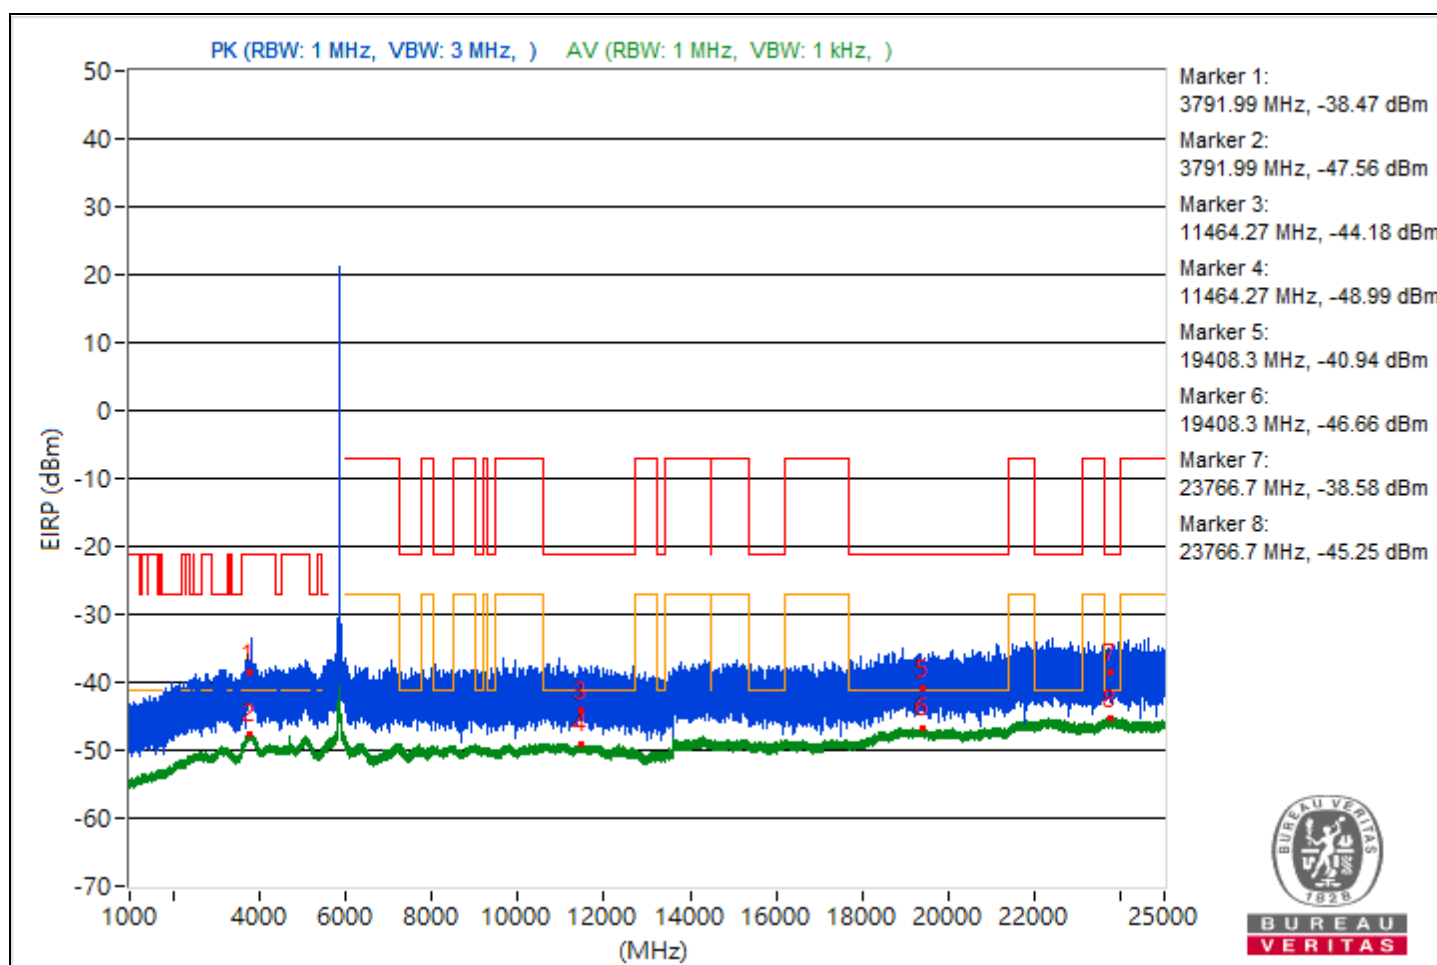

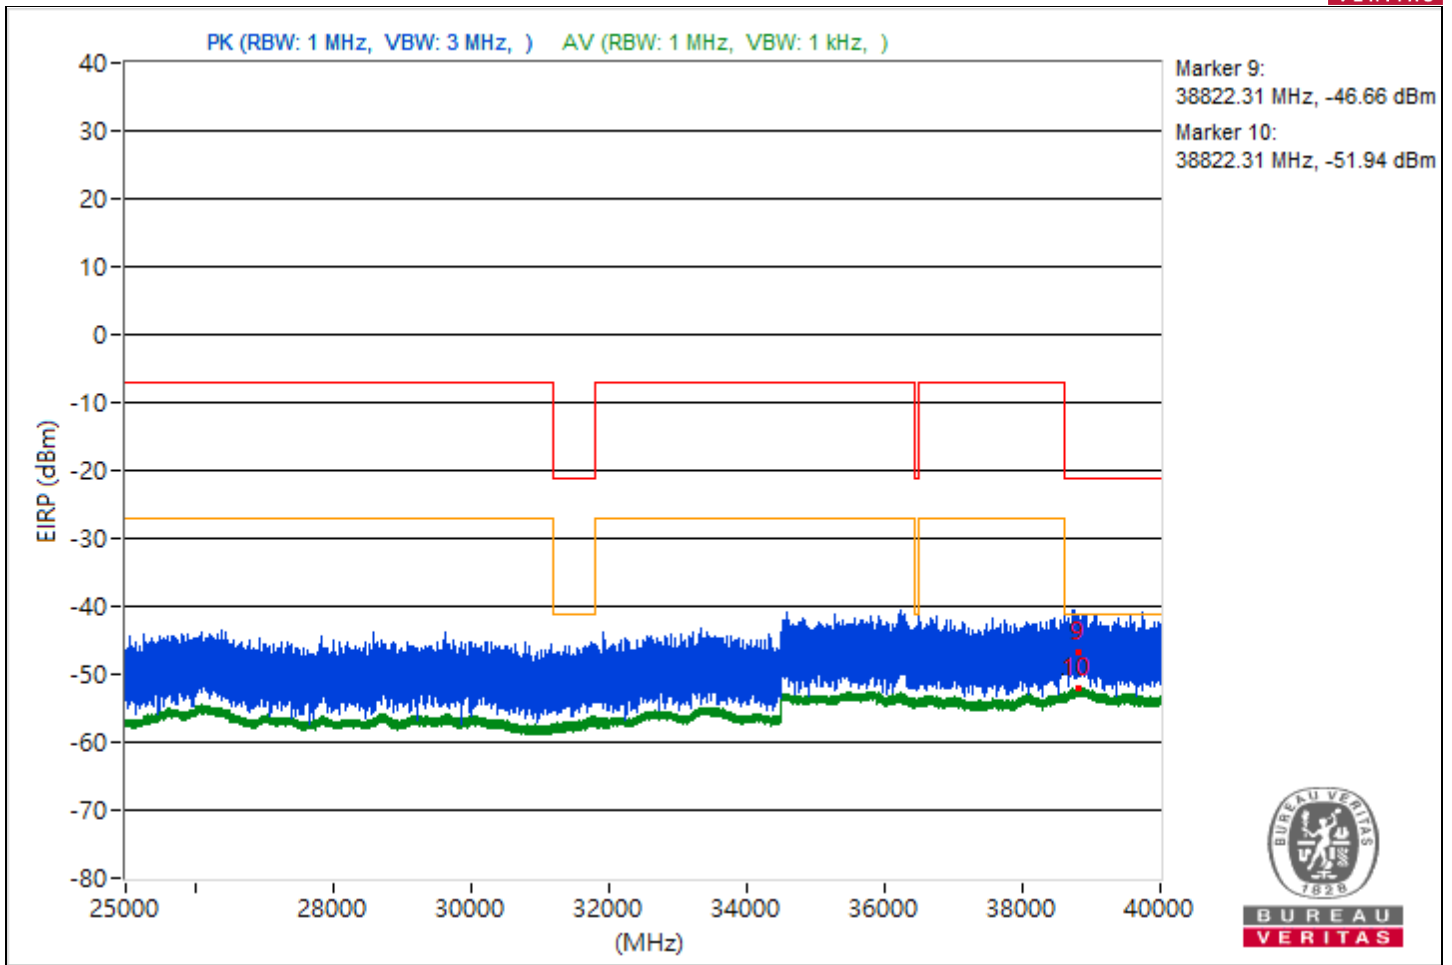



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.47	57.08 PK	74	-16.92	-46.55	8.37	-38.18
2	3786.47	48.28 AV	54	-5.72	-55.35	8.37	-46.98
3	9024.27	53.18 PK	74	-20.82	-50.45	8.37	-42.08
4	9024.27	46.65 AV	54	-7.35	-56.98	8.37	-48.61
5	19401.9	56.6 PK	74	-17.4	-47.03	8.37	-38.66
6	19401.9	49.23 AV	54	-4.77	-54.4	8.37	-46.03
7	23844.9	58.56 PK	74	-15.44	-45.07	8.37	-36.7
8	23844.9	50.92 AV	54	-3.08	-52.71	8.37	-44.34
9	38803.29	50.48 PK	74	-23.52	-53.15	8.37	-44.78
10	38803.29	44.96 AV	54	-9.04	-58.67	8.37	-50.3

Note: Margin value = Emission Level - Limit value

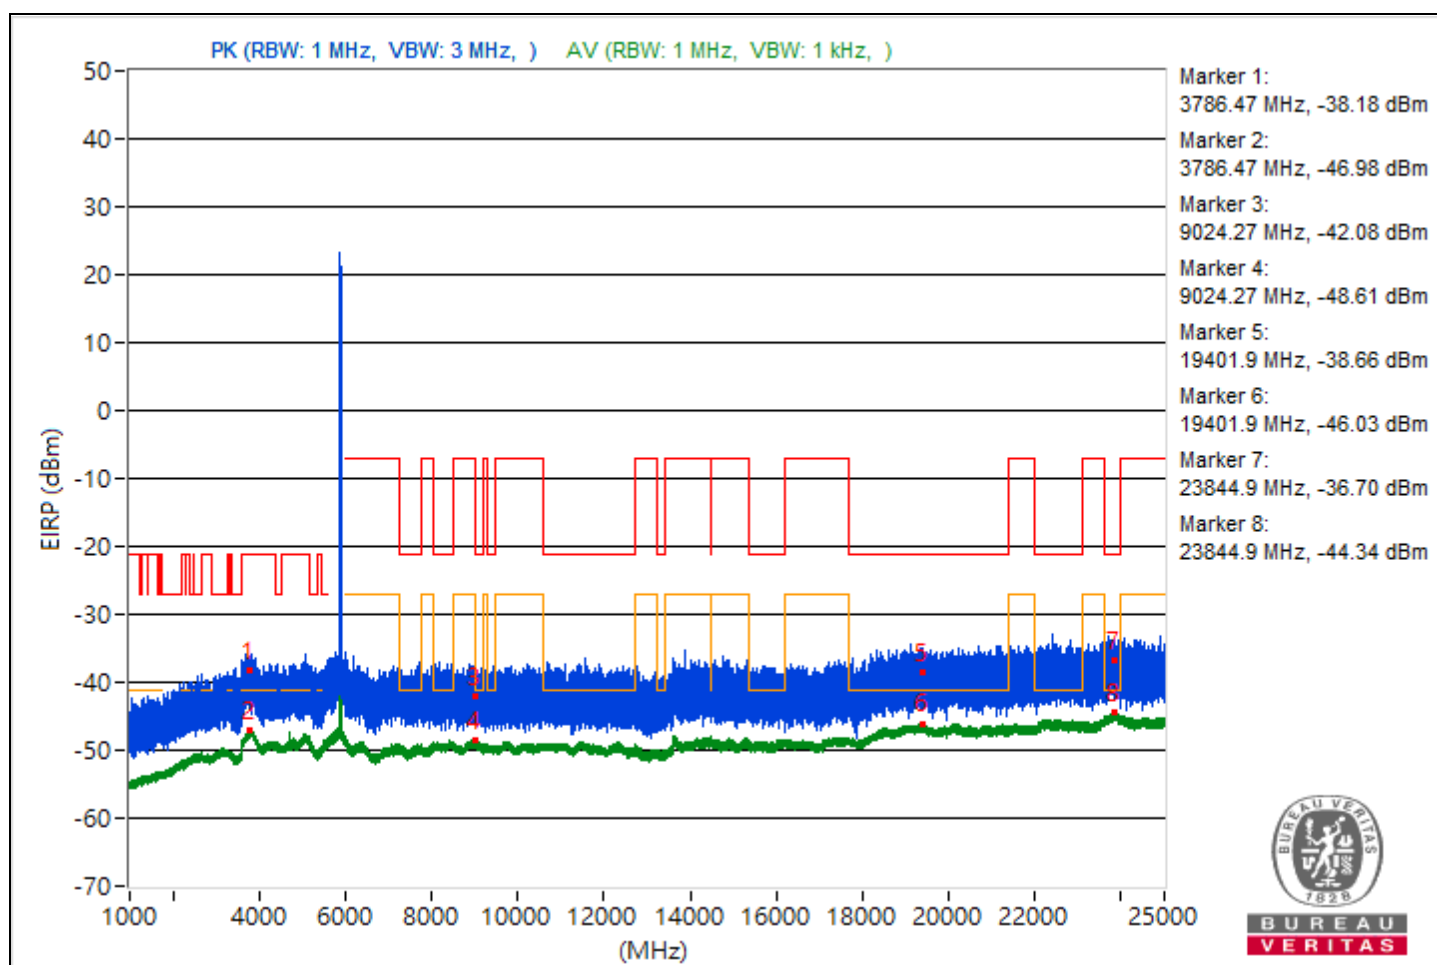

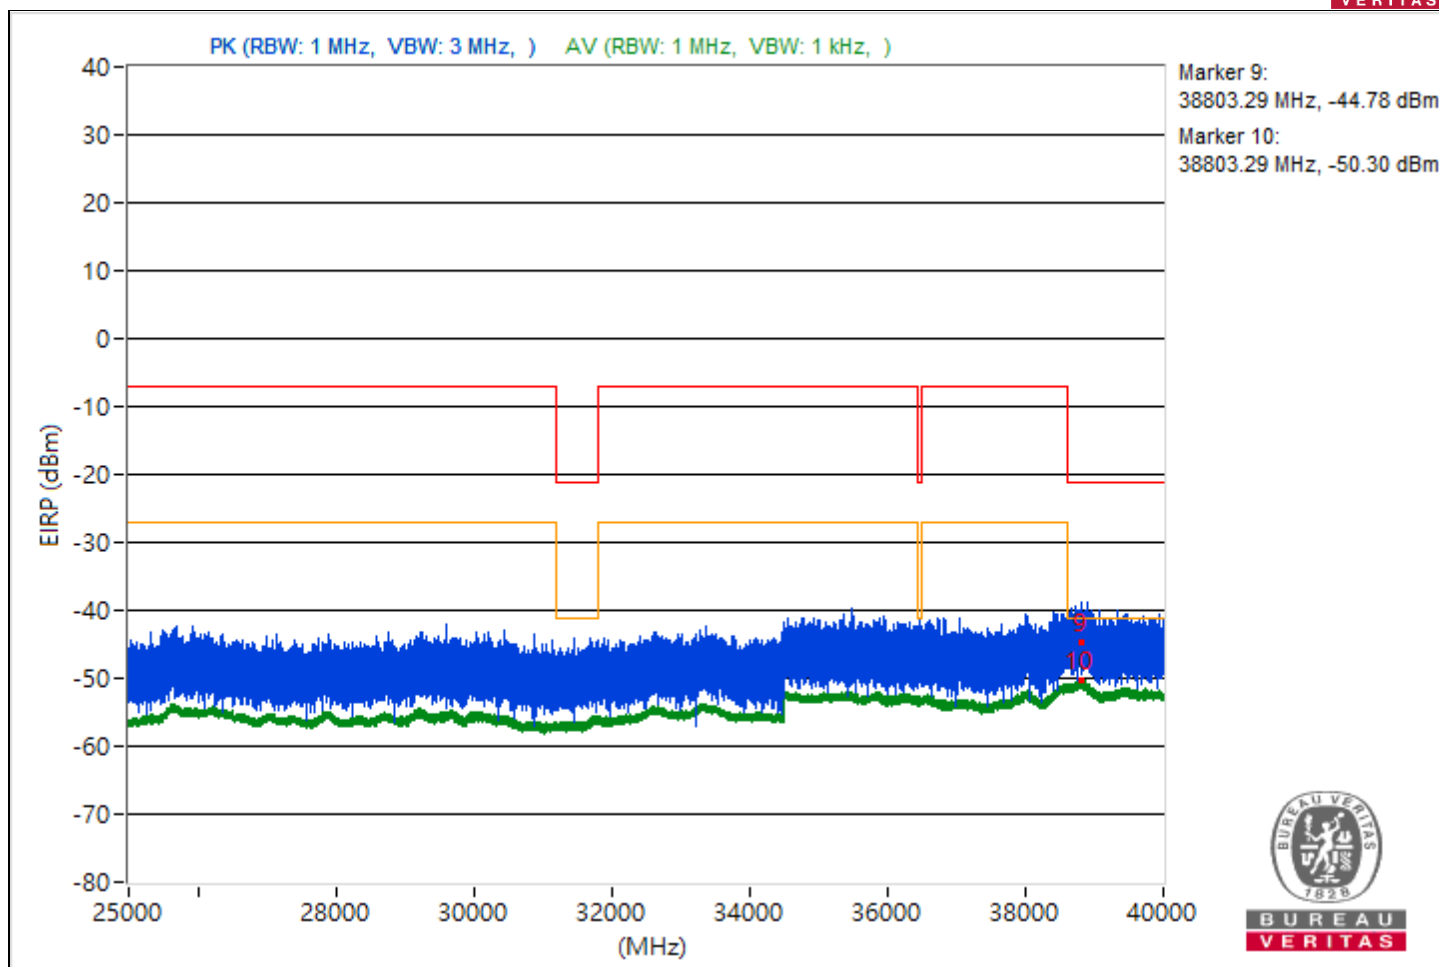



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3763.68	55.65 PK	74	-18.35	-47.98	8.37	-39.61
2	3763.68	47.68 AV	54	-6.32	-55.95	8.37	-47.58
3	10999.47	53.53 PK	74	-20.47	-50.1	8.37	-41.73
4	10999.47	46.15 AV	54	-7.85	-57.48	8.37	-49.11
5	19192.7	54.78 PK	74	-19.22	-48.85	8.37	-40.48
6	19192.7	48.39 AV	54	-5.61	-55.24	8.37	-46.87
7	23784.5	59.32 PK	74	-14.68	-44.31	8.37	-35.94
8	23784.5	49.79 AV	54	-4.21	-53.84	8.37	-45.47
9	38824	50.23 PK	74	-23.77	-53.4	8.37	-45.03
10	38824	43.29 AV	54	-10.71	-60.34	8.37	-51.97

Note: Margin value = Emission Level - Limit value

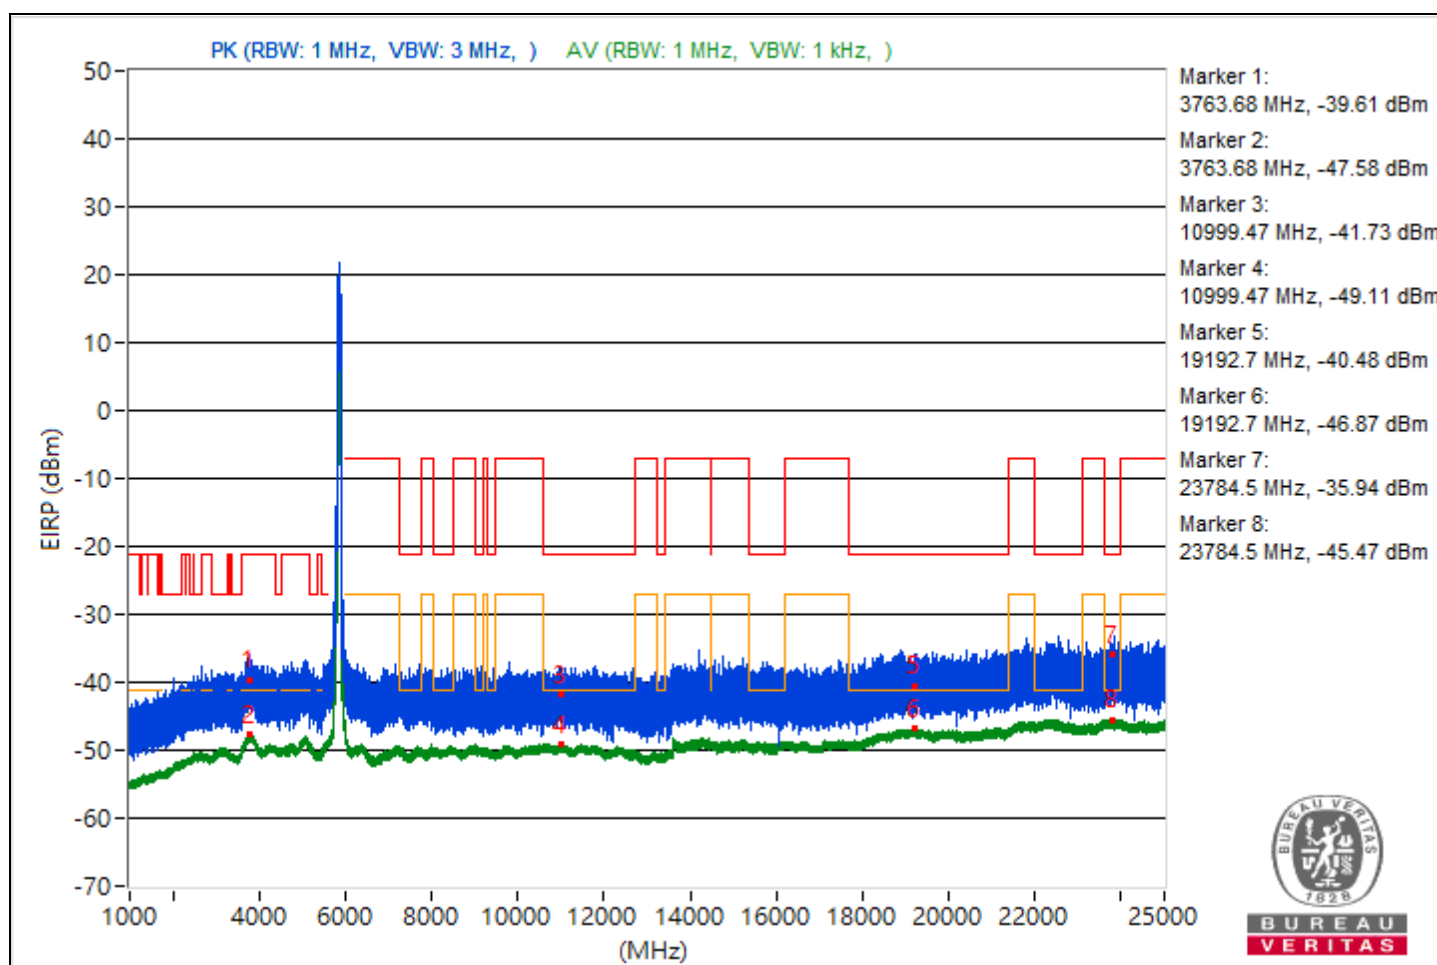

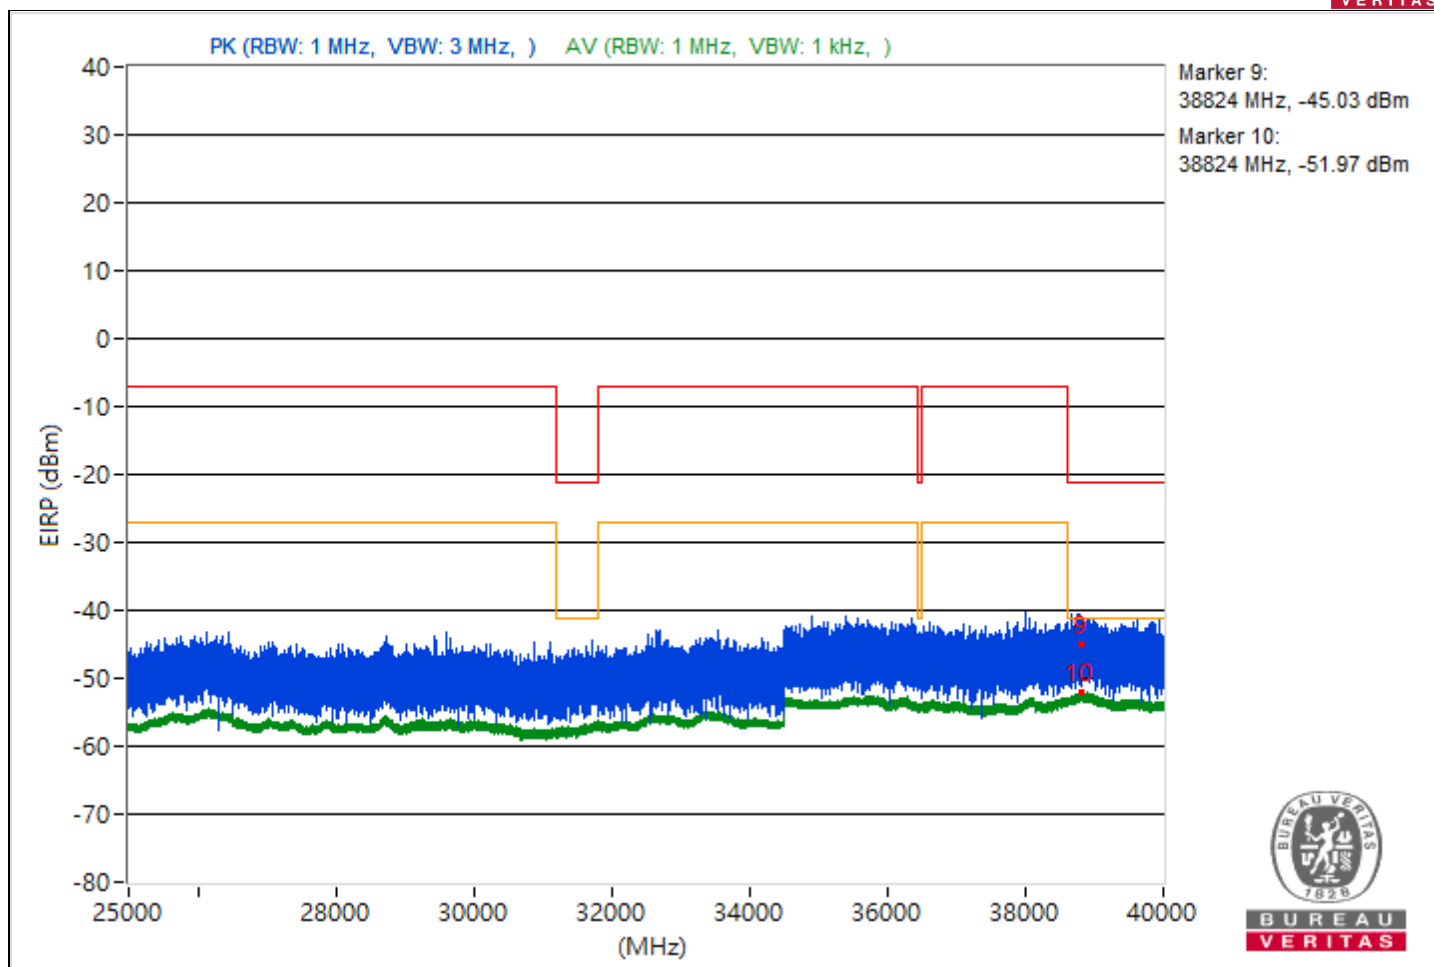



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.36	53.6 PK	74	-20.4	-50.03	8.37	-41.66
2	3811.36	47.65 AV	54	-6.35	-55.98	8.37	-47.61
3	11056.36	52.05 PK	74	-21.95	-51.58	8.37	-43.21
4	11056.36	46.16 AV	54	-7.84	-57.47	8.37	-49.1
5	19298.2	54.4 PK	74	-19.6	-49.23	8.37	-40.86
6	19298.2	48.44 AV	54	-5.56	-55.19	8.37	-46.82
7	22298.3	54.62 PK	74	-19.38	-49.01	8.37	-40.64
8	22298.3	49.92 AV	54	-4.08	-53.71	8.37	-45.34
9	38832.27	50.63 PK	74	-23.37	-53	8.37	-44.63
10	38832.27	43.27 AV	54	-10.73	-60.36	8.37	-51.99

Note: Margin value = Emission Level - Limit value

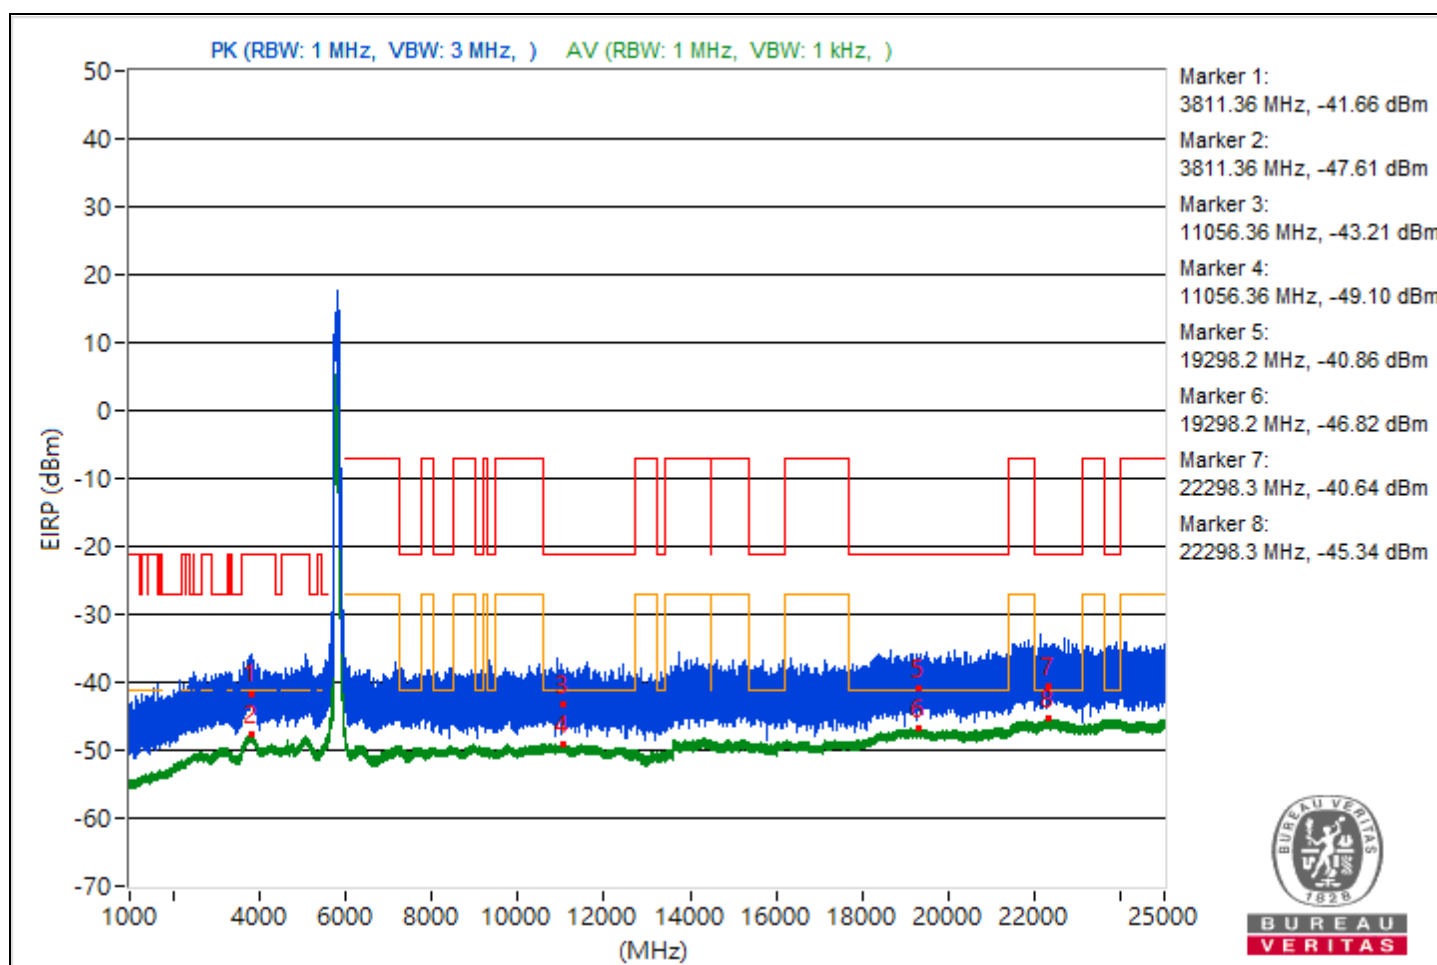

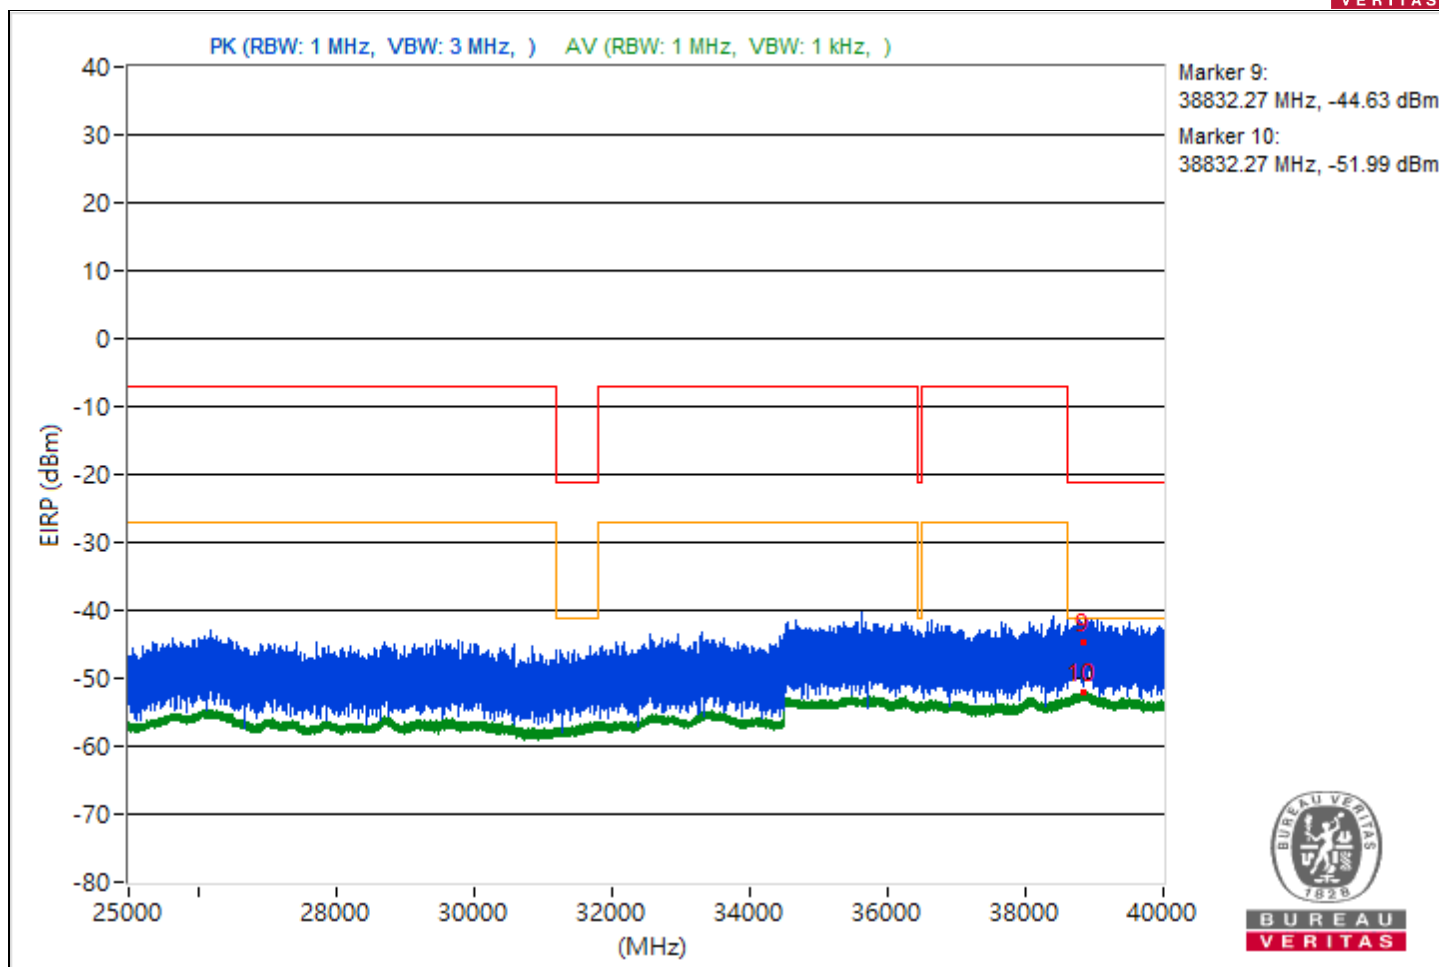



RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3843.79	51.95 PK	74	-22.05	-51.68	8.37	-43.31
2	3843.79	47.65 AV	54	-6.35	-55.98	8.37	-47.61
3	10677.16	52 PK	74	-22	-51.63	8.37	-43.26
4	10677.16	46.12 AV	54	-7.88	-57.51	8.37	-49.14
5	19125.5	54.73 PK	74	-19.27	-48.9	8.37	-40.53
6	19125.5	48.33 AV	54	-5.67	-55.3	8.37	-46.93
7	23869.7	58.94 PK	74	-15.06	-44.69	8.37	-36.32
8	23869.7	50.02 AV	54	-3.98	-53.61	8.37	-45.24
9	38816.18	49.95 PK	74	-24.05	-53.68	8.37	-45.31
10	38816.18	43.35 AV	54	-10.65	-60.28	8.37	-51.91

Note: Margin value = Emission Level - Limit value

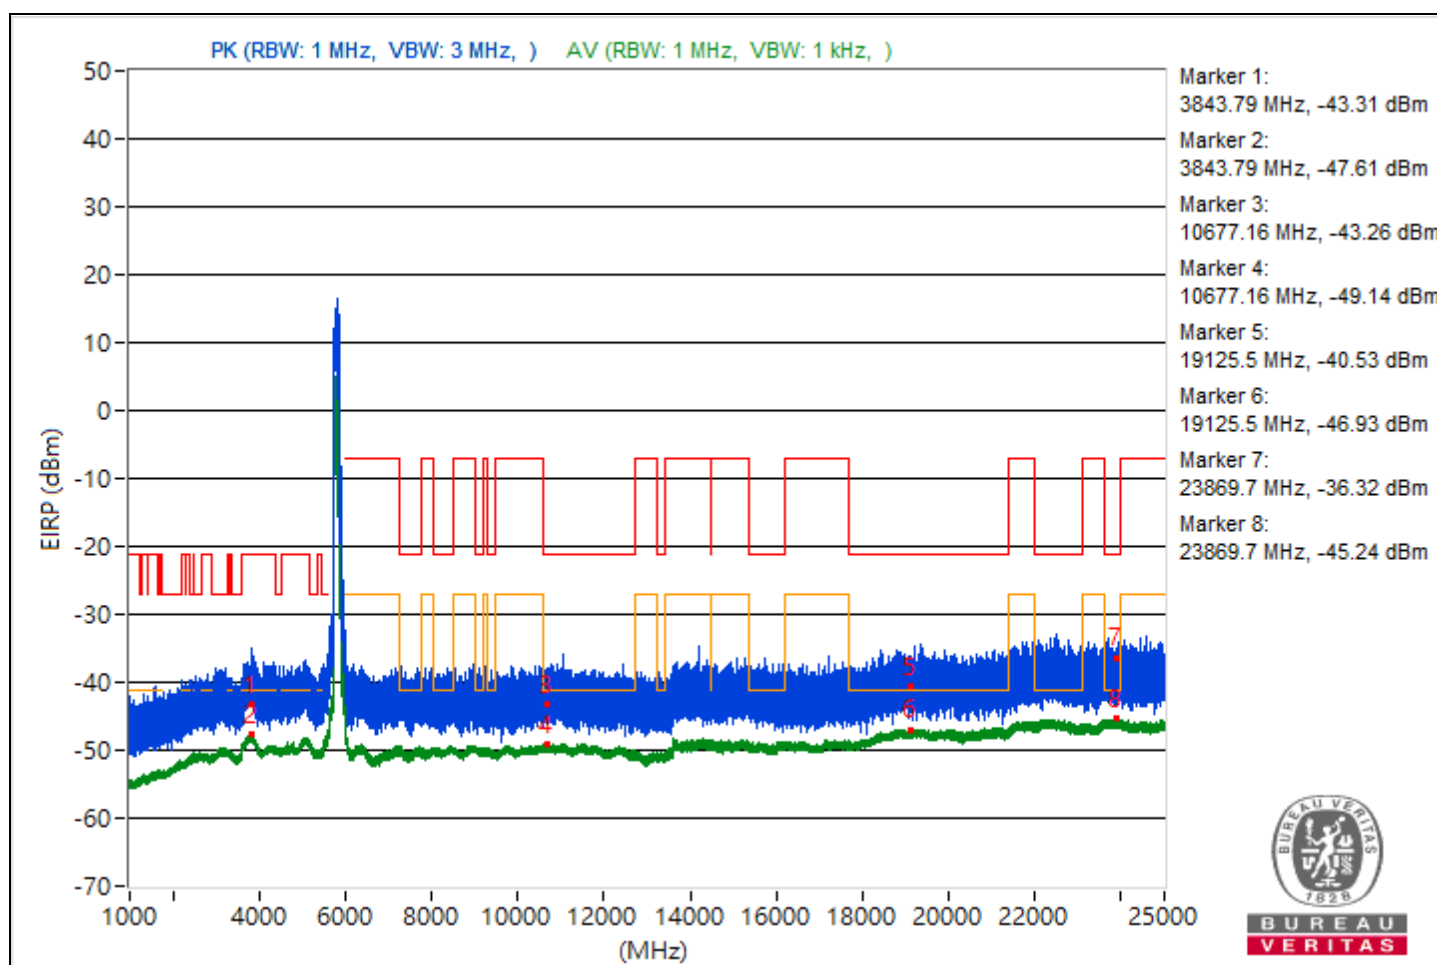

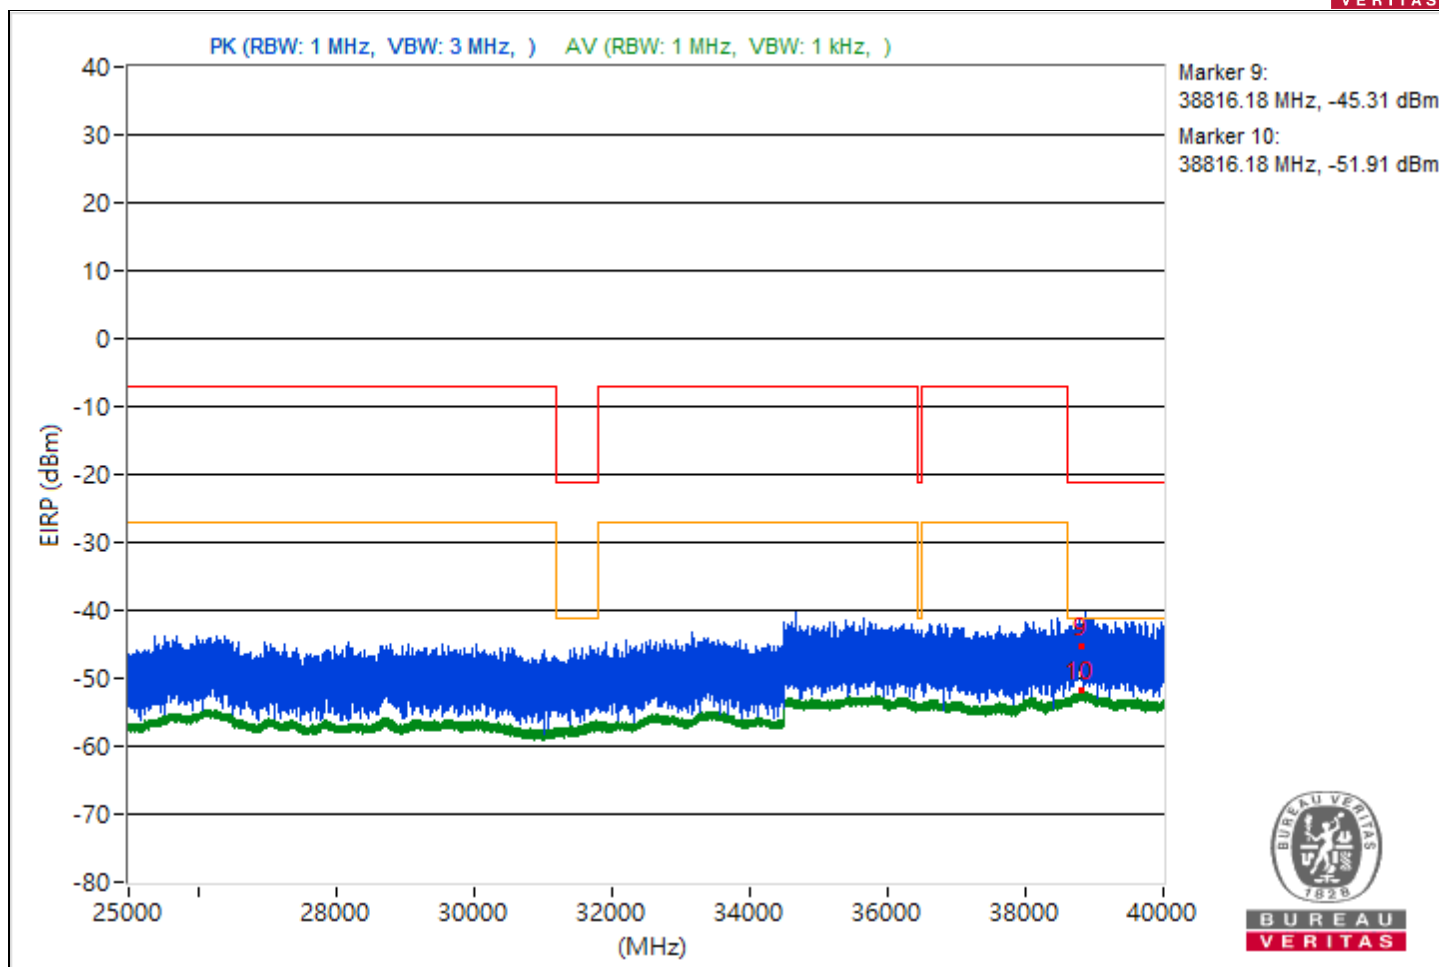


Conducted Band Edges

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5846.45	116.65 PK			13.02	8.37	21.39
2	#5627.84	66.53 PK	68.26	-1.73	-37.1	8.37	-28.73
3	#5651.11	66.56 PK	69.08	-2.52	-37.07	8.37	-28.7
4	#5700.09	64.14 PK	105.28	-41.14	-39.49	8.37	-31.12
5	#5720.59	63.18 PK	112.21	-49.03	-40.45	8.37	-32.08
6	#5924.91	66.35 PK	88.32	-21.97	-37.28	8.37	-28.91
7	#5946.96	67.43 PK	88.26	-20.83	-36.2	8.37	-27.83
8	*5846.13	110.63 AV			7	8.37	15.37
9	#5924.49	59.66 AV	68.64	-8.98	-43.97	8.37	-35.6
10	#5961.94	60 AV	68.26	-8.26	-43.63	8.37	-35.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

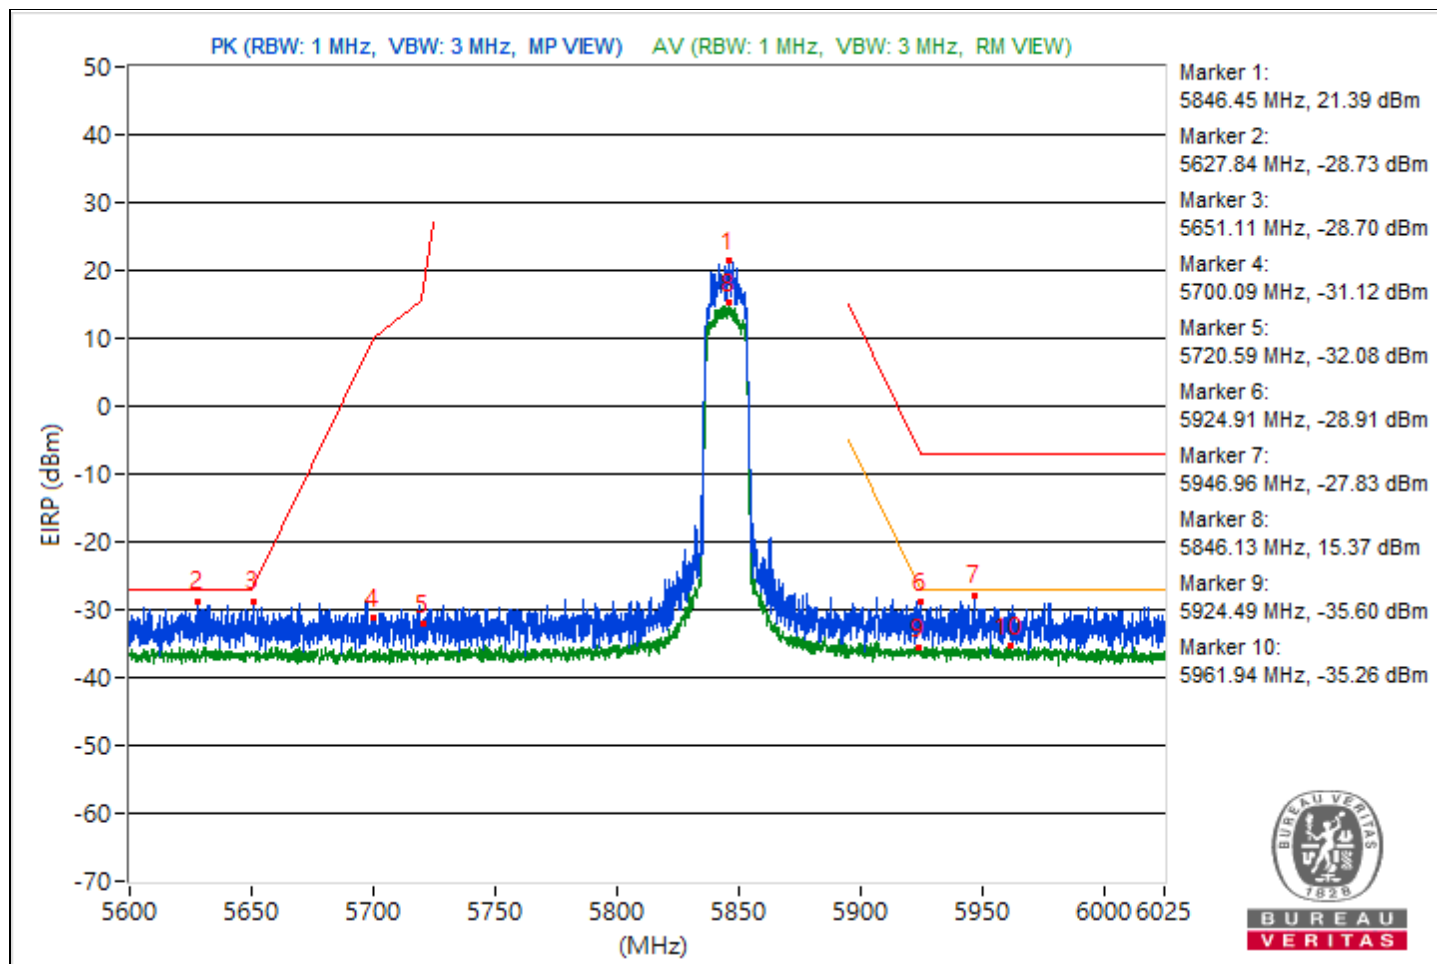


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5863.61	117.05 PK			13.42	8.37	21.79
2	#5607.49	66.71 PK	68.26	-1.55	-36.92	8.37	-28.55
3	#5650.26	64.22 PK	68.45	-4.23	-39.41	8.37	-31.04
4	#5700.88	64.77 PK	105.51	-40.74	-38.86	8.37	-30.49
5	#5720.38	63.26 PK	111.73	-48.47	-40.37	8.37	-32
6	#5924.81	64.77 PK	88.4	-23.63	-38.86	8.37	-30.49
7	#5938.25	67.2 PK	88.26	-21.06	-36.43	8.37	-28.06
8	*5863.98	110.24 AV			6.61	8.37	14.98
9	#5924.81	59.54 AV	68.4	-8.86	-44.09	8.37	-35.72
10	#5927.25	60.13 AV	68.26	-8.13	-43.5	8.37	-35.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

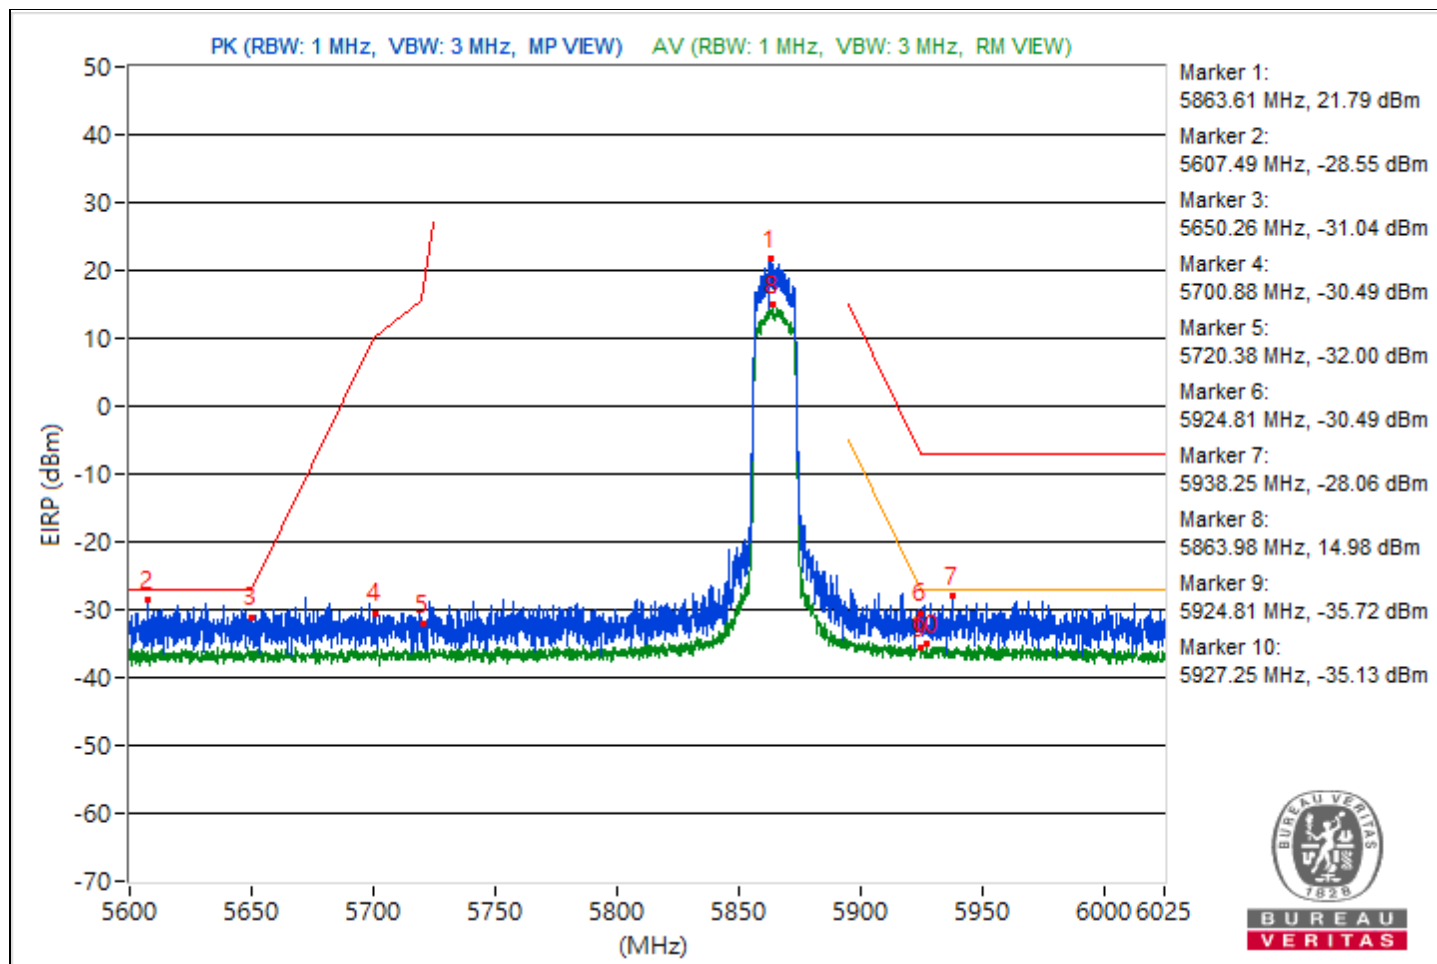


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5886.56	116.79 PK			13.16	8.37	21.53
2	#5626.14	66.46 PK	68.26	-1.8	-37.17	8.37	-28.8
3	#5650.52	64.26 PK	68.65	-4.39	-39.37	8.37	-31
4	#5701.31	67.06 PK	105.63	-38.57	-36.57	8.37	-28.2
5	#5720.01	63.88 PK	110.88	-47	-39.75	8.37	-31.38
6	#5898.77	86.69 PK	107.49	-20.8	-16.94	8.37	-8.57
7	#5931.98	66.63 PK	88.26	-21.63	-37	8.37	-28.63
8	*5886.56	110.06 AV			6.43	8.37	14.8
9	#5924.91	59.78 AV	68.32	-8.54	-43.85	8.37	-35.48
10	#5938.46	60.19 AV	68.26	-8.07	-43.44	8.37	-35.07

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

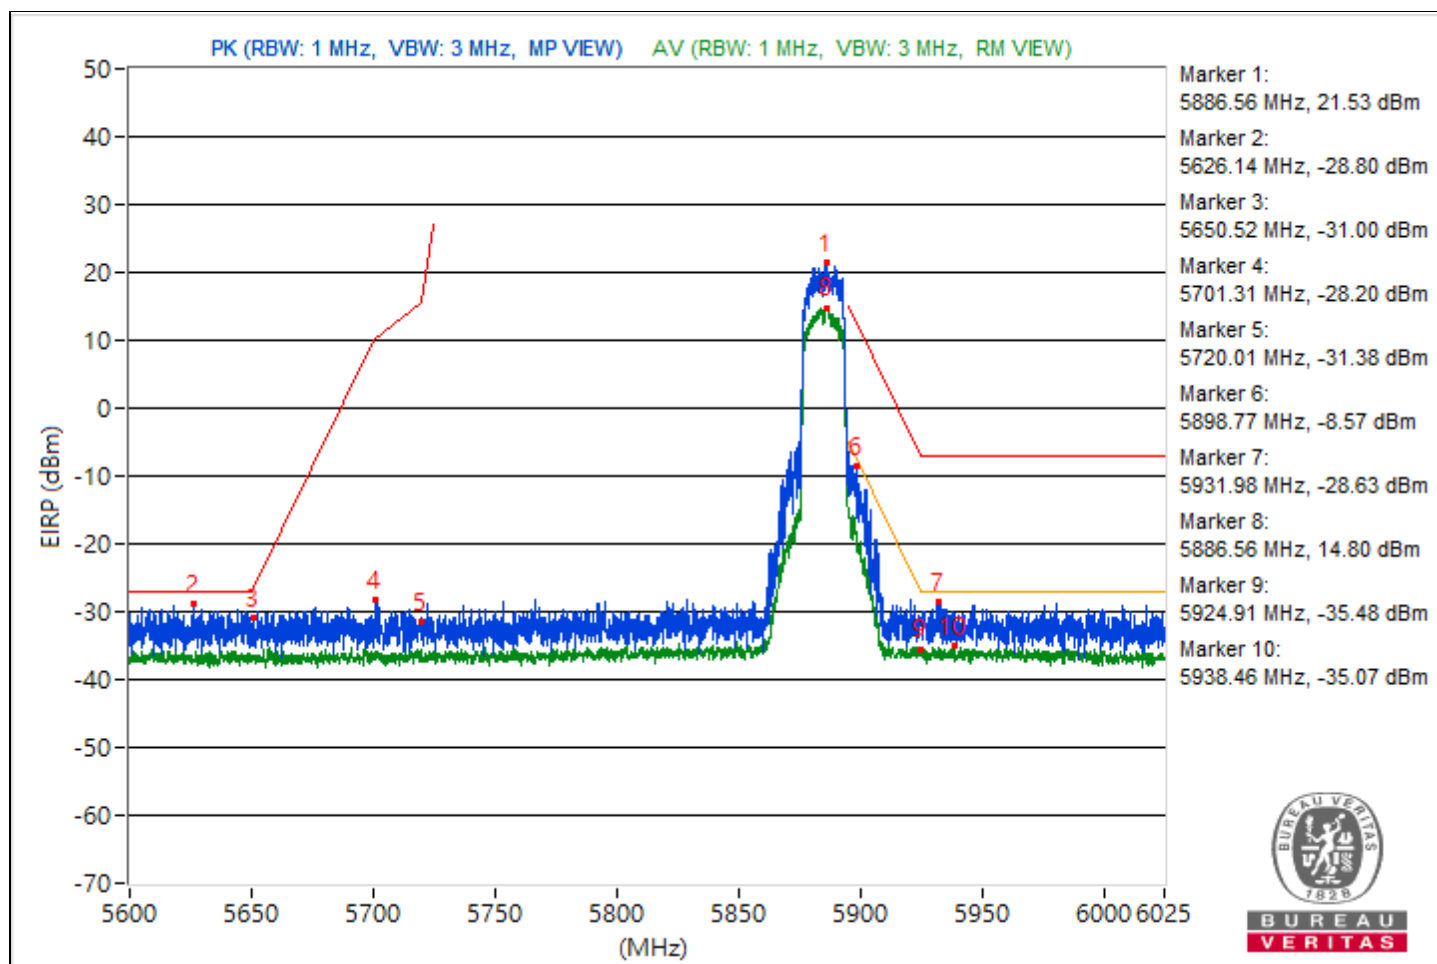


RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5843.95	116.82 PK			13.19	8.37	21.56
2	#5609.56	66.24 PK	68.26	-2.02	-37.39	8.37	-29.02
3	#5650.84	64.44 PK	68.88	-4.44	-39.19	8.37	-30.82
4	#5700.67	66.01 PK	105.45	-39.44	-37.62	8.37	-29.25
5	#5720.06	63.36 PK	111	-47.64	-40.27	8.37	-31.9
6	#5923.05	65.39 PK	89.69	-24.3	-38.24	8.37	-29.87
7	#5945.1	67.04 PK	88.26	-21.22	-36.59	8.37	-28.22
8	*5847.3	109.74 AV			6.11	8.37	14.48
9	#5924.49	58.77 AV	68.64	-9.87	-44.86	8.37	-36.49
10	#5925.23	59.07 AV	68.26	-9.19	-44.56	8.37	-36.19

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

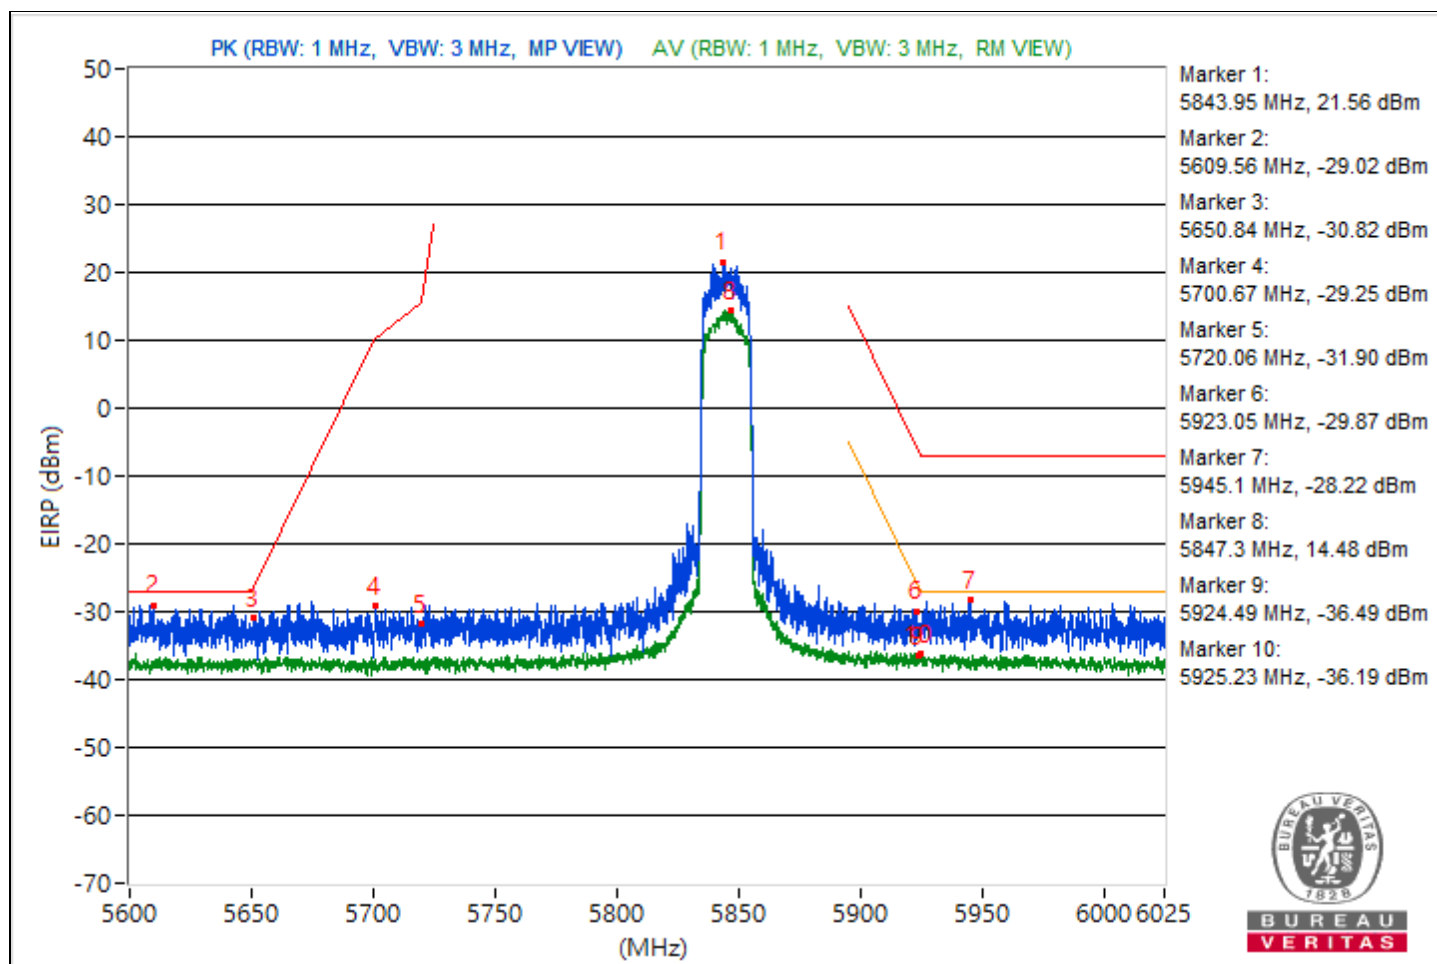


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5865.94	117 PK			13.37	8.37	21.74
2	#5638.83	66.66 PK	68.26	-1.6	-36.97	8.37	-28.6
3	#5650.84	64.64 PK	68.88	-4.24	-38.99	8.37	-30.62
4	#5700.03	64.53 PK	105.27	-40.74	-39.1	8.37	-30.73
5	#5720.43	63.05 PK	111.85	-48.8	-40.58	8.37	-32.21
6	#5922.36	66.31 PK	90.19	-23.88	-37.32	8.37	-28.95
7	#5944.52	67.18 PK	88.26	-21.08	-36.45	8.37	-28.08
8	*5864.46	110.8 AV			7.17	8.37	15.54
9	#5924.91	58.24 AV	68.32	-10.08	-45.39	8.37	-37.02
10	#5926.98	59.51 AV	68.26	-8.75	-44.12	8.37	-35.75

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

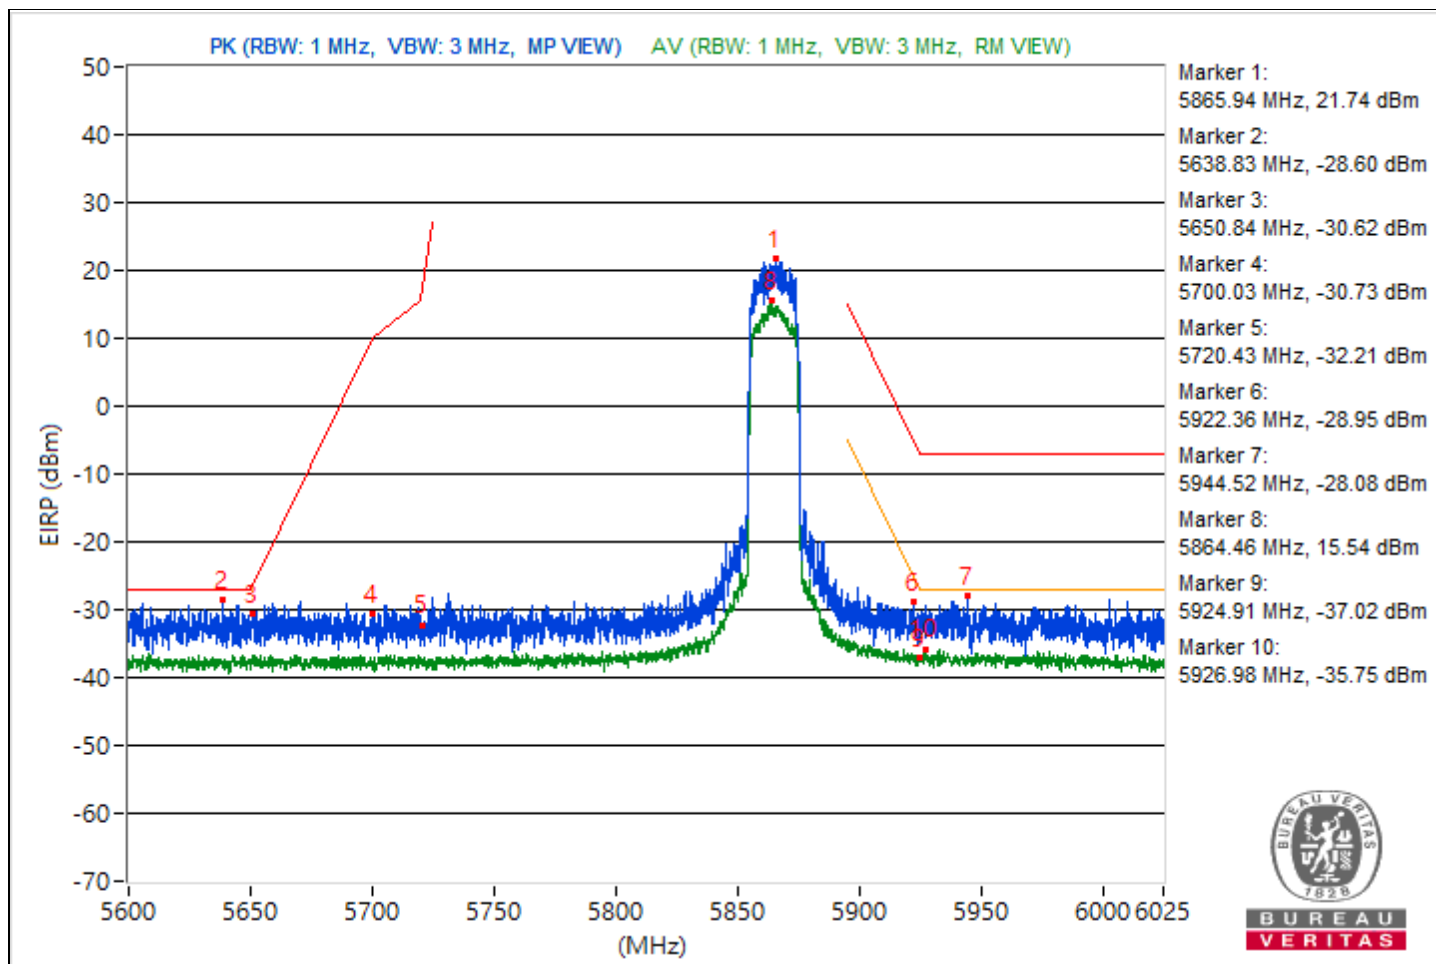


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5895	100.52 PK	110.26	-9.74	-3.11	8.37	5.26
2	#5895	89.08 AV	90.26	-1.18	-14.55	8.37	-6.18

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

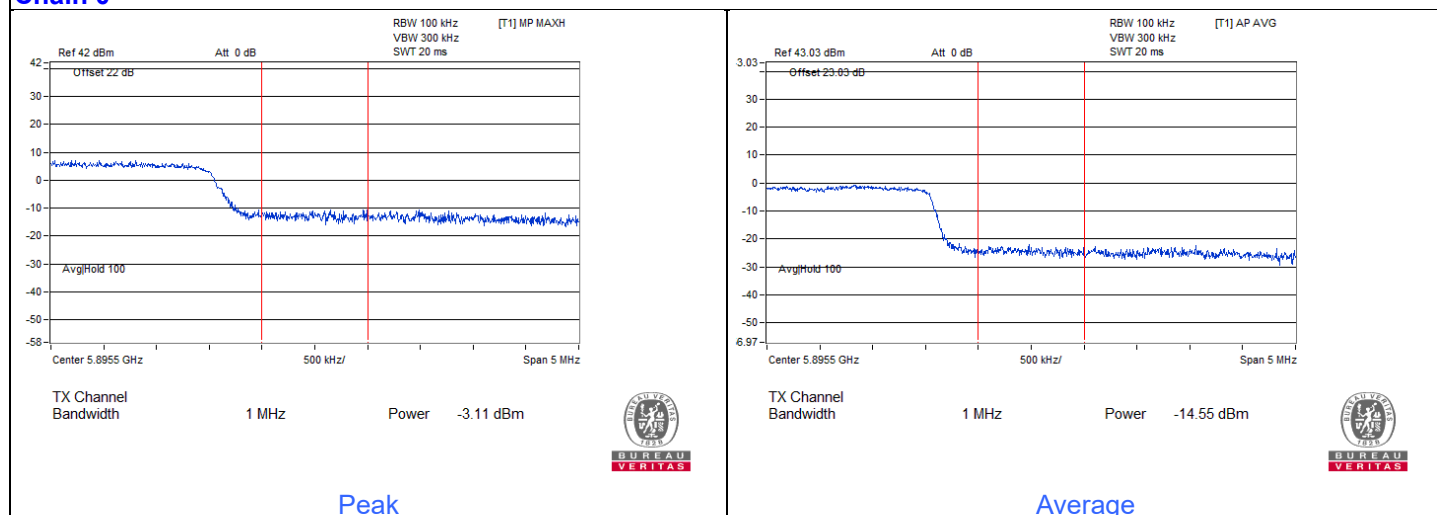


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5840.98	117.35 PK			13.72	8.37	22.09
2	#5637.4	65.85 PK	68.26	-2.41	-37.78	8.37	-29.41
3	#5651	65.02 PK	69	-3.98	-38.61	8.37	-30.24
4	#5700.88	65.52 PK	105.51	-39.99	-38.11	8.37	-29.74
5	#5720.12	64.17 PK	111.12	-46.95	-39.46	8.37	-31.09
6	#5923.69	65.6 PK	89.22	-23.62	-38.03	8.37	-29.66
7	#5930.76	67.58 PK	88.26	-20.68	-36.05	8.37	-27.68
8	*5833.11	110.07 AV			6.44	8.37	14.81
9	#5924.91	59.34 AV	68.32	-8.98	-44.29	8.37	-35.92
10	#5931.23	59.61 AV	68.26	-8.65	-44.02	8.37	-35.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

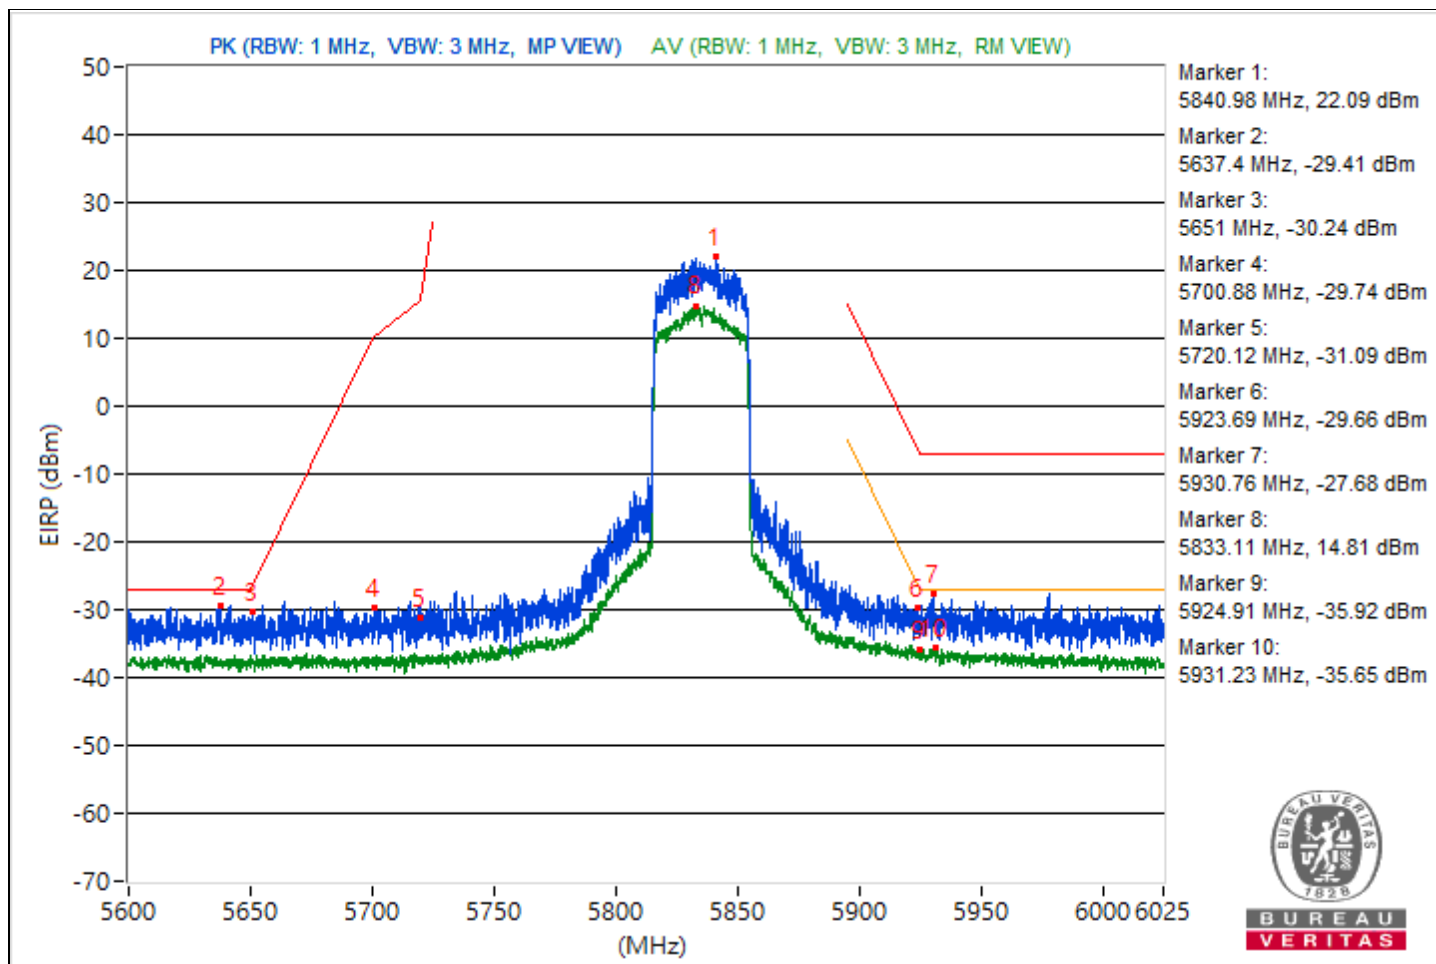


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5874.02	117.17 PK			13.54	8.37	21.91
2	#5649.62	67.09 PK	68.26	-1.17	-36.54	8.37	-28.17
3	#5649.99	62.97 PK	68.26	-5.29	-40.66	8.37	-32.29
4	#5704.76	66.84 PK	106.59	-39.75	-36.79	8.37	-28.42
5	#5720.17	64.95 PK	111.24	-46.29	-38.68	8.37	-30.31
6	#5908.18	85.53 PK	100.6	-15.07	-18.1	8.37	-9.73
7	#5941.43	67.88 PK	88.26	-20.38	-35.75	8.37	-27.38
8	*5876.62	110.01 AV			6.38	8.37	14.75
9	#5895	88.63 AV	90.26	-1.63	-15	8.37	-6.63
10	#5957	59.36 AV	68.26	-8.9	-44.27	8.37	-35.9

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

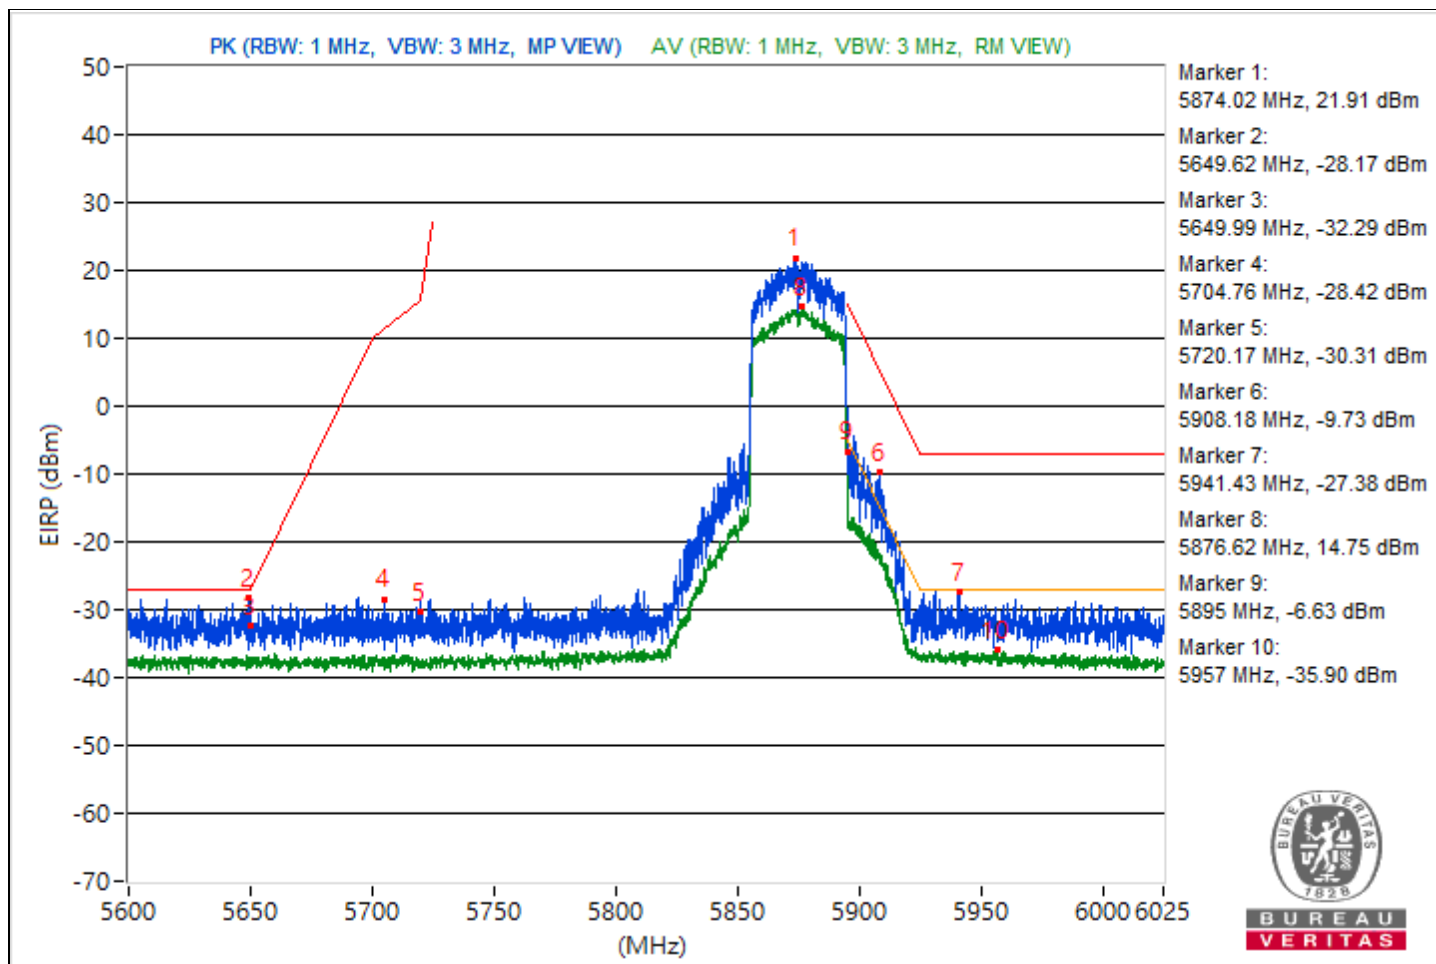


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5853.46	117.55 PK			13.92	8.37	22.29
2	#5624.38	65.96 PK	68.26	-2.3	-37.67	8.37	-29.3
3	#5650.42	64.67 PK	68.57	-3.9	-38.96	8.37	-30.59
4	#5700.67	65.65 PK	105.45	-39.8	-37.98	8.37	-29.61
5	#5720.59	66.05 PK	112.21	-46.16	-37.58	8.37	-29.21
6	#5904.41	91.37 PK	103.36	-11.99	-12.26	8.37	-3.89
7	#5926.82	70.91 PK	88.26	-17.35	-32.72	8.37	-24.35
8	*5853.99	108.44 AV			4.81	8.37	13.18
9	#5895	89.43 AV	90.26	-0.83	-14.2	8.37	-5.83
10	#5926.4	62.46 AV	68.26	-5.8	-41.17	8.37	-32.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

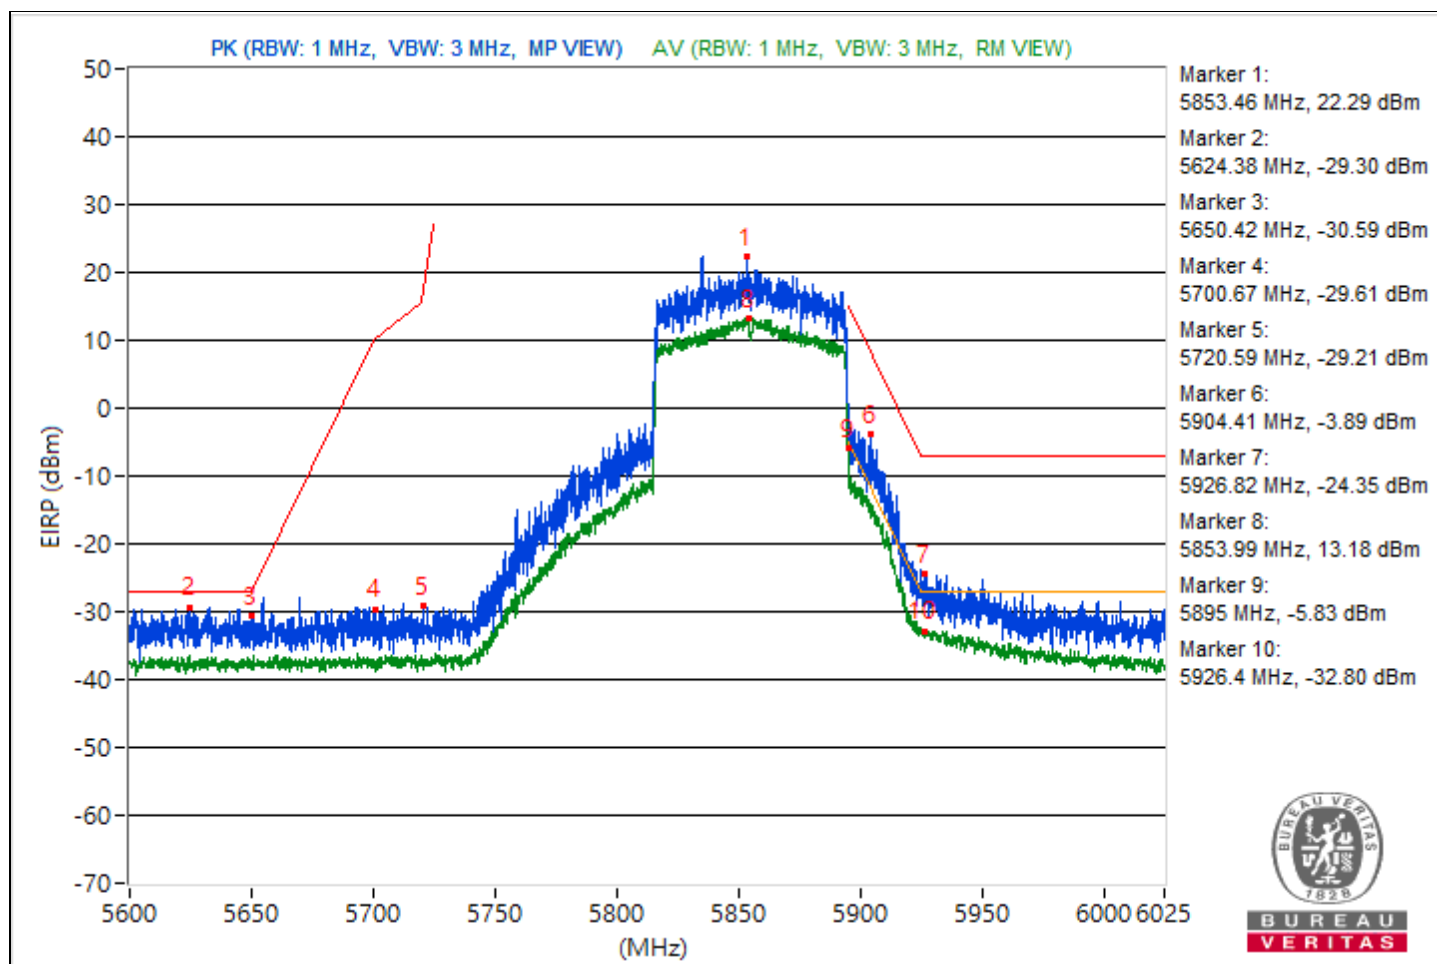


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5829.29	113.72 PK			10.09	8.37	18.46
2	#5632.67	67.3 PK	68.26	-0.96	-36.33	8.37	-27.96
3	#5651.96	67.82 PK	69.71	-1.89	-35.81	8.37	-27.44
4	#5704.71	68.35 PK	106.58	-38.23	-35.28	8.37	-26.91
5	#5720.01	65.98 PK	110.88	-44.9	-37.65	8.37	-29.28
6	#5902.07	88.03 PK	105.08	-17.05	-15.6	8.37	-7.23
7	#5929.64	71.72 PK	88.26	-16.54	-31.91	8.37	-23.54
8	*5816.75	104.02 AV			0.39	8.37	8.76
9	#5906	76.64 AV	82.19	-5.55	-26.99	8.37	-18.62
10	#5951.32	63.19 AV	68.26	-5.07	-40.44	8.37	-32.07

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

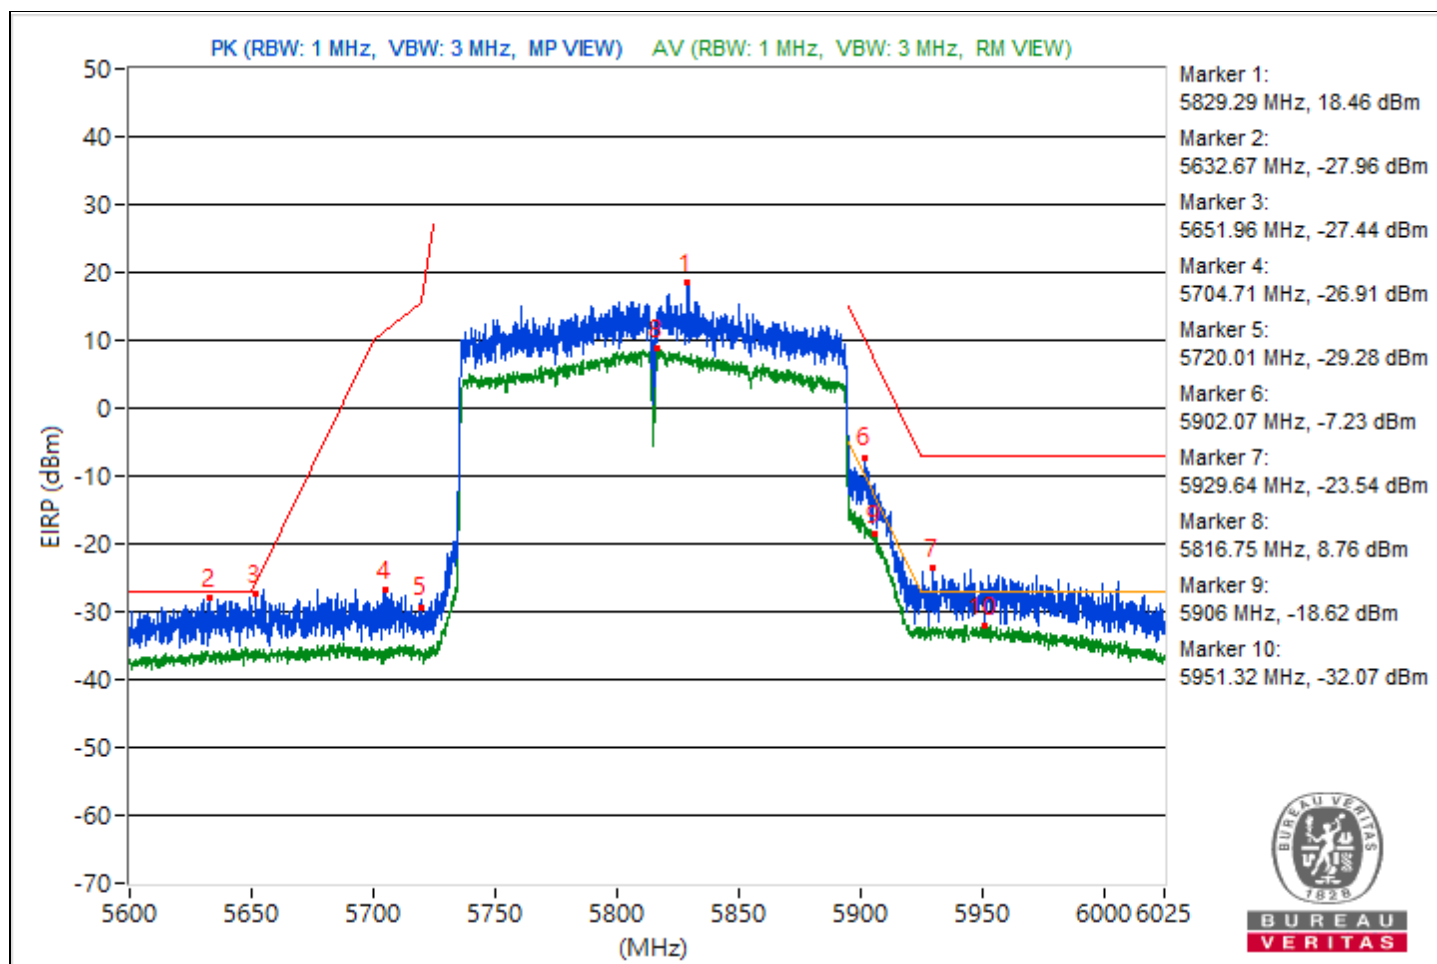


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5836.67	118.4 PK			14.77	8.37	23.14
2	#5613.81	67.27 PK	68.26	-0.99	-36.36	8.37	-27.99
3	#5651.27	65.54 PK	69.2	-3.66	-38.09	8.37	-29.72
4	#5702.43	66.17 PK	105.94	-39.77	-37.46	8.37	-29.09
5	#5720.86	67.07 PK	112.82	-45.75	-36.56	8.37	-28.19
6	#5924.86	66.15 PK	88.36	-22.21	-37.48	8.37	-29.11
7	#5979.9	67.93 PK	88.26	-20.33	-35.7	8.37	-27.33
8	*5836.51	110.18 AV			6.55	8.37	14.92
9	#5924.91	56.66 AV	68.32	-11.66	-46.97	8.37	-38.6
10	#5941.06	57.63 AV	68.26	-10.63	-46	8.37	-37.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

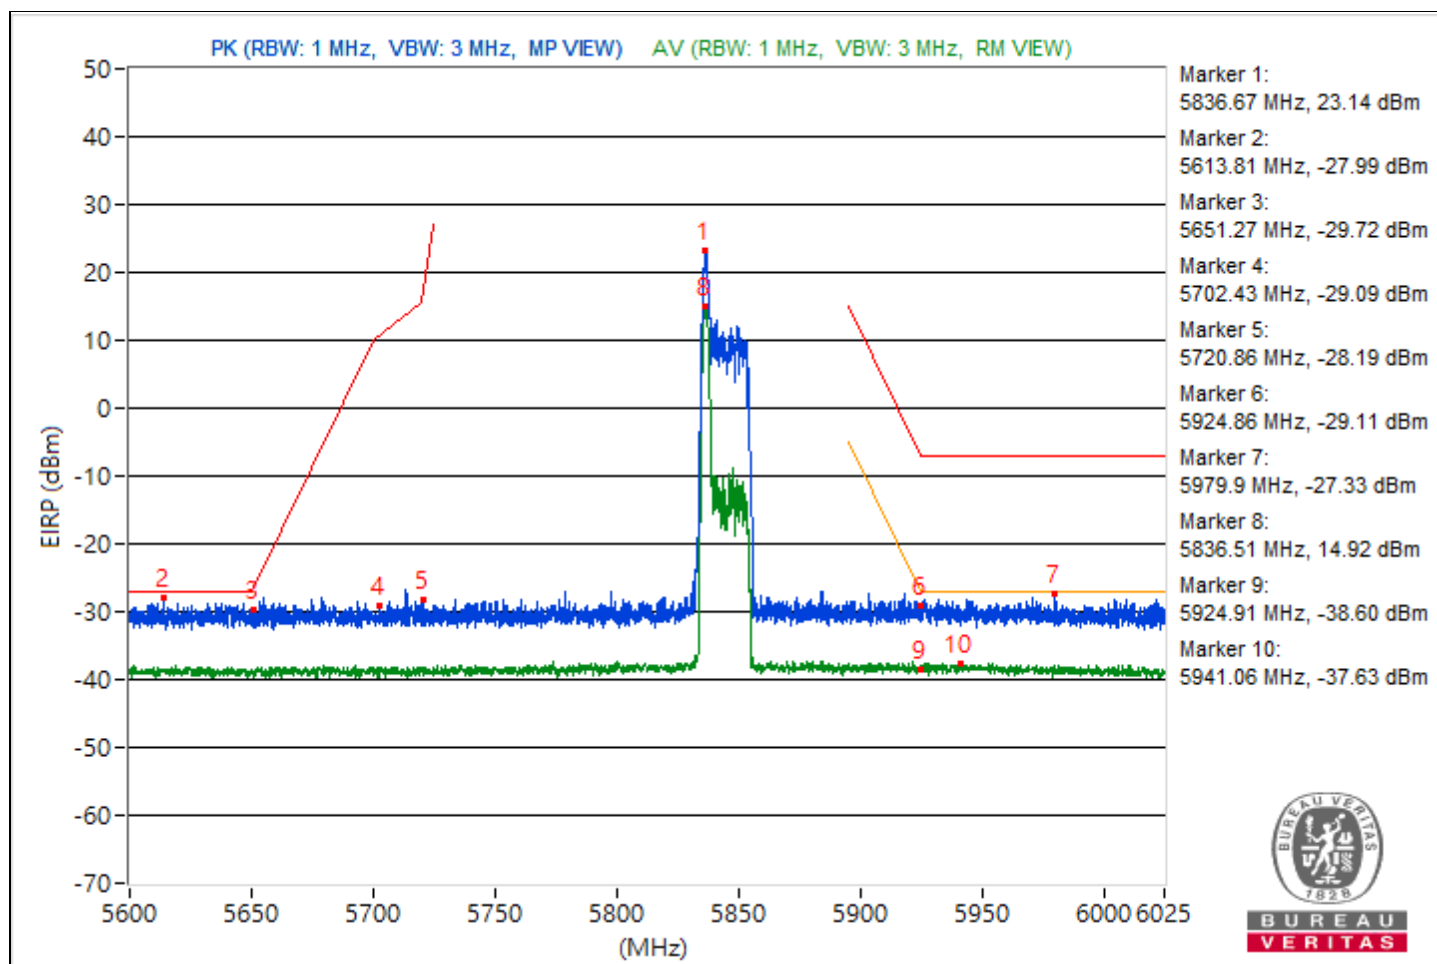


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5857.02	118.49 PK			14.86	8.37	23.23
2	#5628.26	67.59 PK	68.26	-0.67	-36.04	8.37	-27.67
3	#5650.31	66.7 PK	68.49	-1.79	-36.93	8.37	-28.56
4	#5700.73	66.56 PK	105.46	-38.9	-37.07	8.37	-28.7
5	#5720.38	65.86 PK	111.73	-45.87	-37.77	8.37	-29.4
6	#5924.86	66.44 PK	88.36	-21.92	-37.19	8.37	-28.82
7	#5934.42	68.24 PK	88.26	-20.02	-35.39	8.37	-27.02
8	*5856.49	110.01 AV			6.38	8.37	14.75
9	#5924.91	56.97 AV	68.32	-11.35	-46.66	8.37	-38.29
10	#5942.39	57.73 AV	68.26	-10.53	-45.9	8.37	-37.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

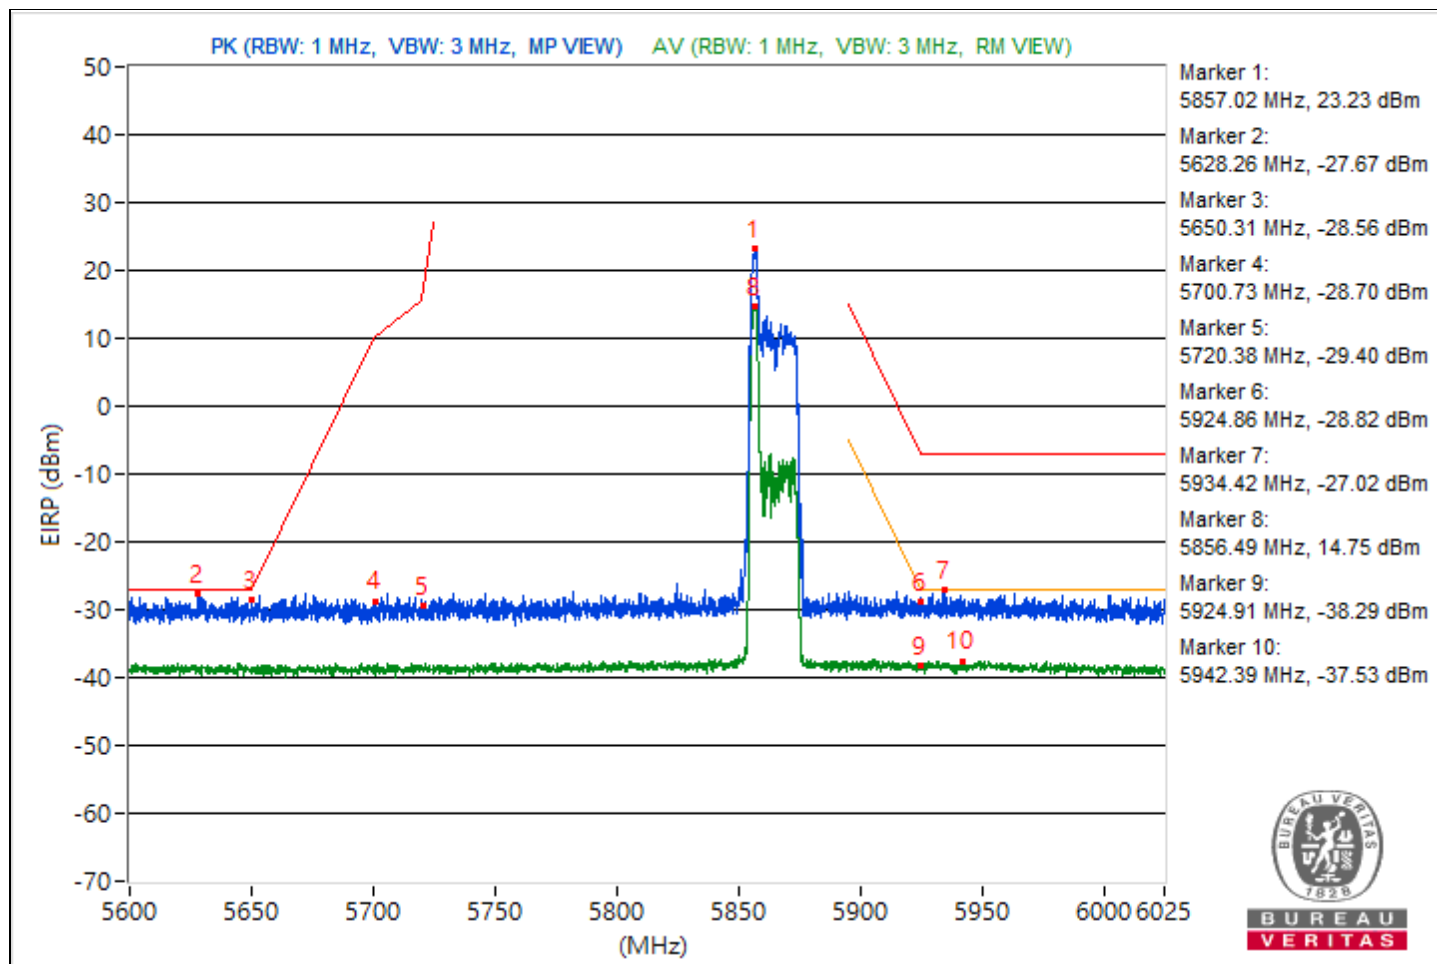


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5895	104.38 PK	110.26	-5.88	0.75	8.37	9.12
2	#5895	89.73 AV	90.26	-0.53	-13.9	8.37	-5.53

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

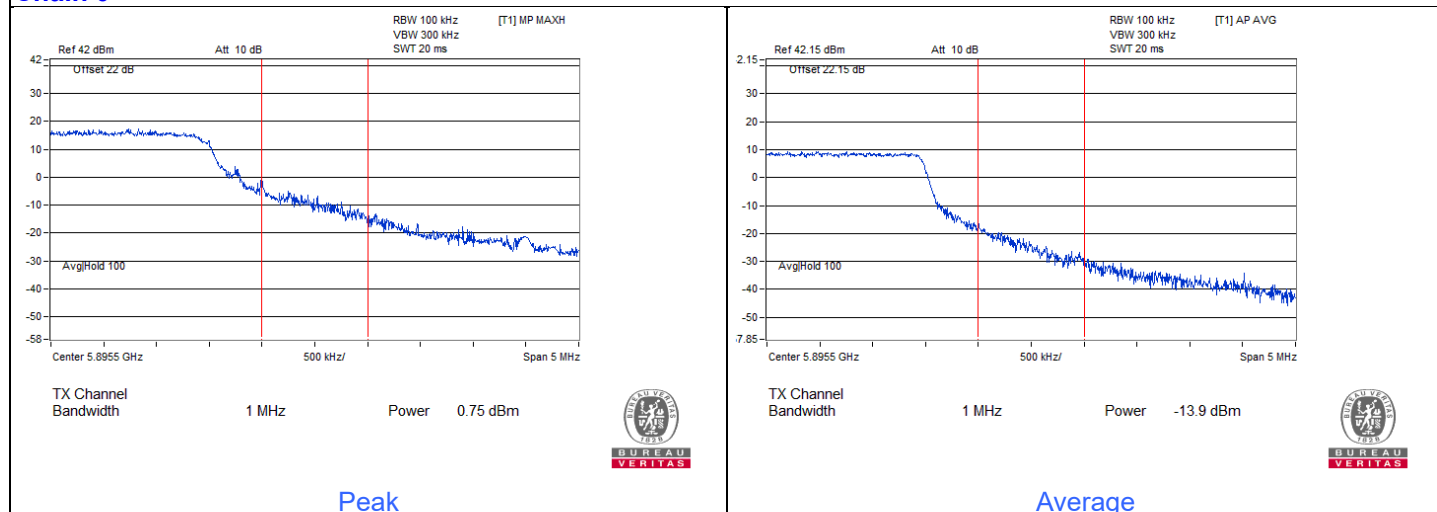


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5837.95	120.9 PK			17.27	8.37	25.64
2	#5603.08	67.28 PK	68.26	-0.98	-36.35	8.37	-27.98
3	#5651.37	66.41 PK	69.28	-2.87	-37.22	8.37	-28.85
4	#5700.73	66.15 PK	105.46	-39.31	-37.48	8.37	-29.11
5	#5720.27	66.33 PK	111.49	-45.16	-37.3	8.37	-28.93
6	#5924.7	67.45 PK	88.48	-21.03	-36.18	8.37	-27.81
7	#5942.07	67.81 PK	88.26	-20.45	-35.82	8.37	-27.45
8	*5837.63	110 AV			6.37	8.37	14.74
9	#5924.75	57.66 AV	68.44	-10.78	-45.97	8.37	-37.6
10	#5932.03	57.82 AV	68.26	-10.44	-45.81	8.37	-37.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

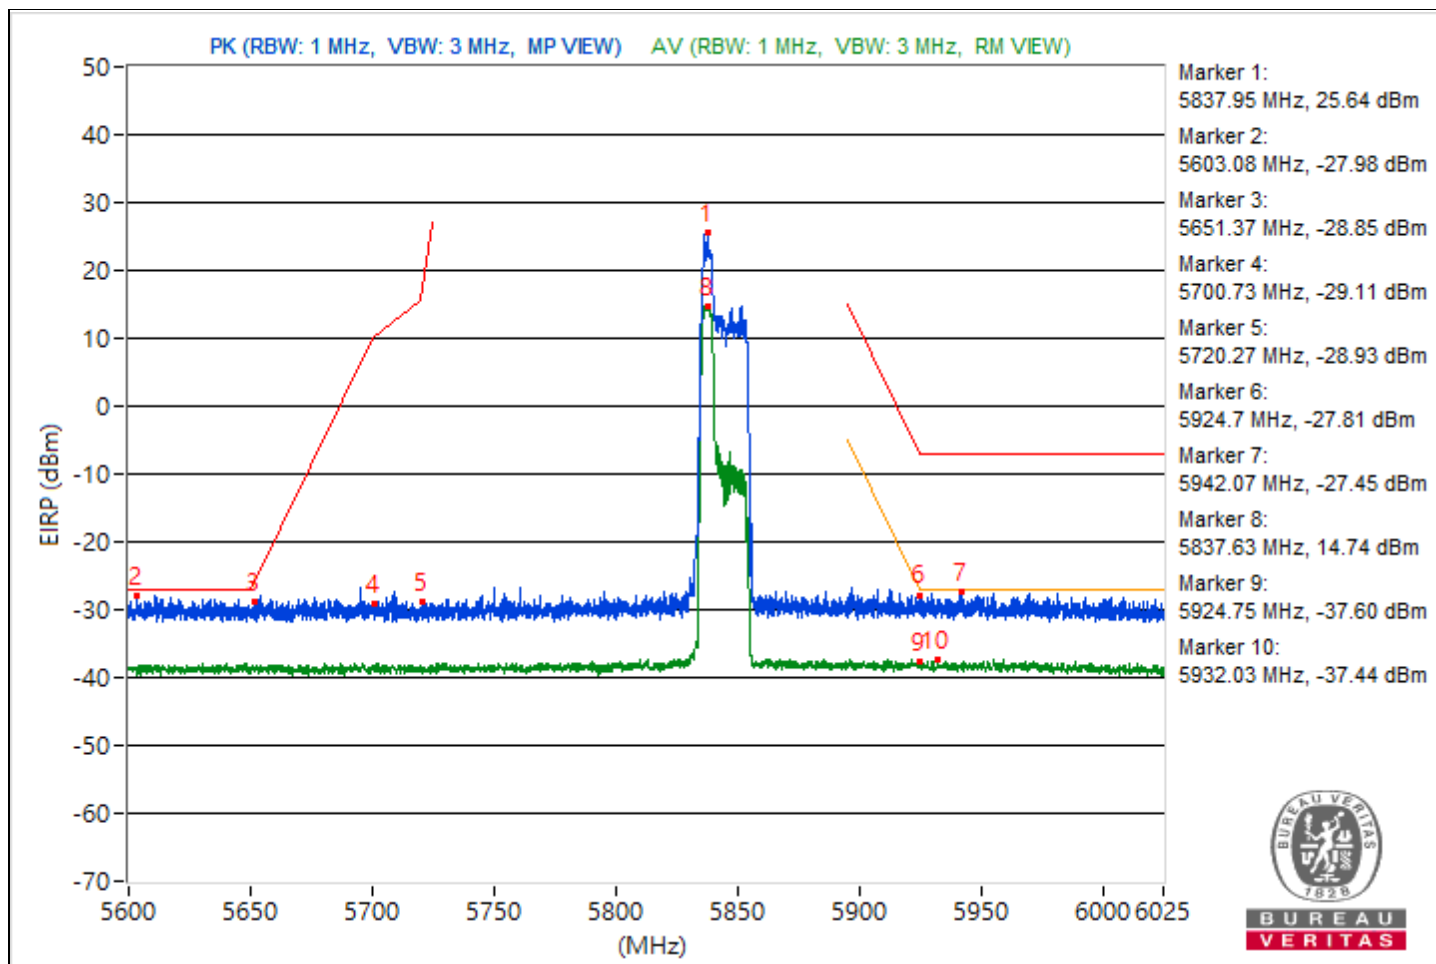


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5857.34	119.28 PK			15.65	8.37	24.02
2	#5600.96	67.43 PK	68.26	-0.83	-36.2	8.37	-27.83
3	#5650.57	66.37 PK	68.69	-2.32	-37.26	8.37	-28.89
4	#5700.19	67.8 PK	105.31	-37.51	-35.83	8.37	-27.46
5	#5720.06	66 PK	111	-45	-37.63	8.37	-29.26
6	#5924.91	67.27 PK	88.32	-21.05	-36.36	8.37	-27.99
7	#5977.13	68.24 PK	88.26	-20.02	-35.39	8.37	-27.02
8	*5857.76	109.75 AV			6.12	8.37	14.49
9	#5924.49	57.39 AV	68.64	-11.25	-46.24	8.37	-37.87
10	#5945.1	58.13 AV	68.26	-10.13	-45.5	8.37	-37.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

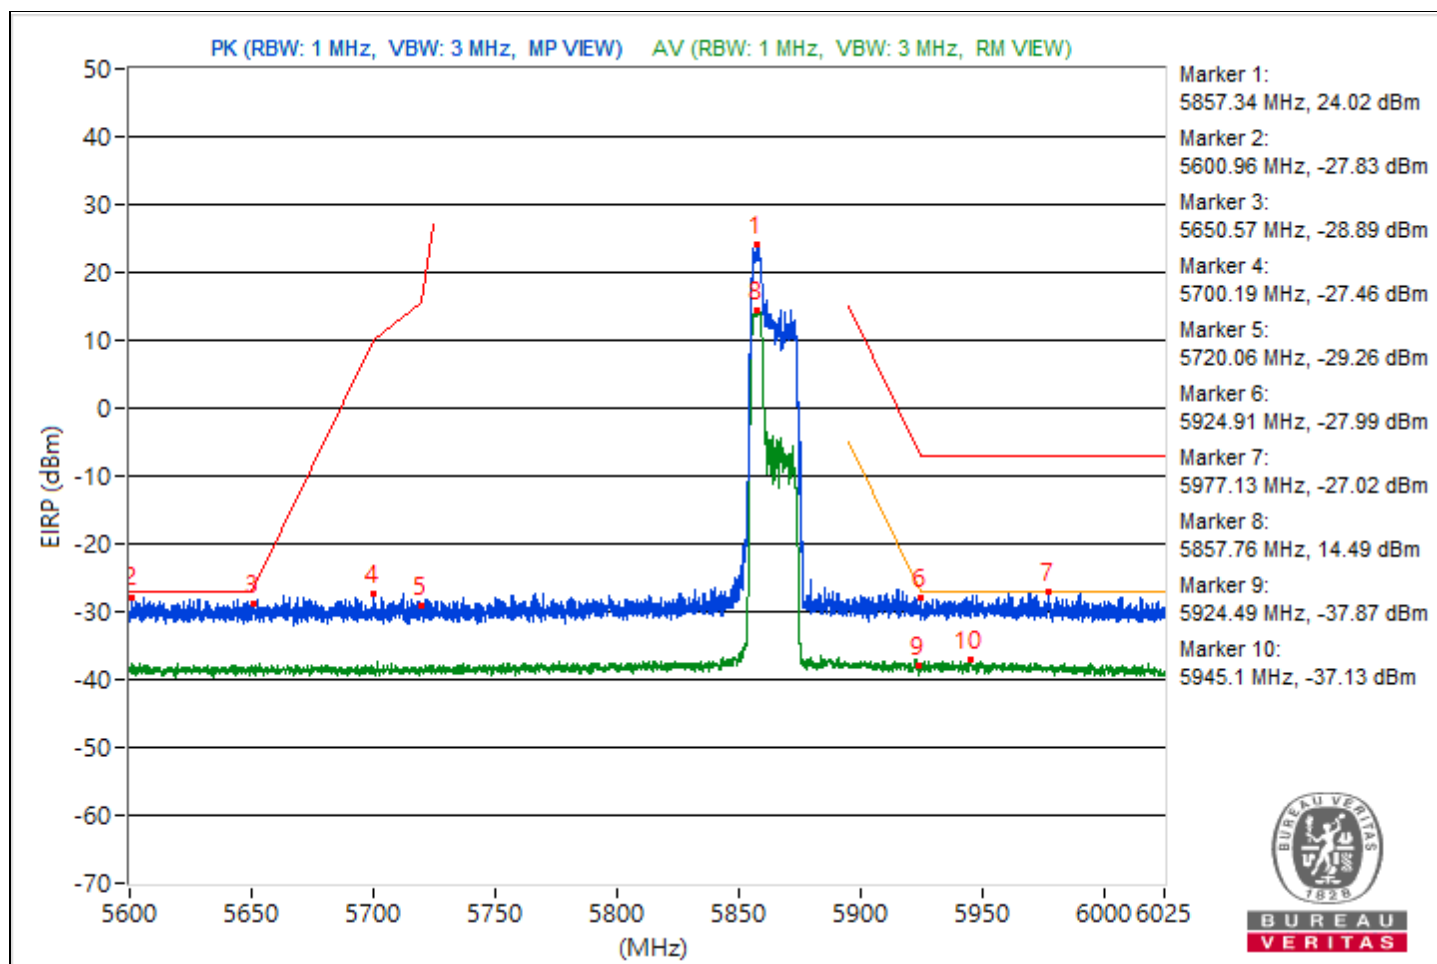


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5895	102.9 PK	110.26	-7.36	-0.73	8.37	7.64
2	#5895	88.64 AV	90.26	-1.62	-14.99	8.37	-6.62

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

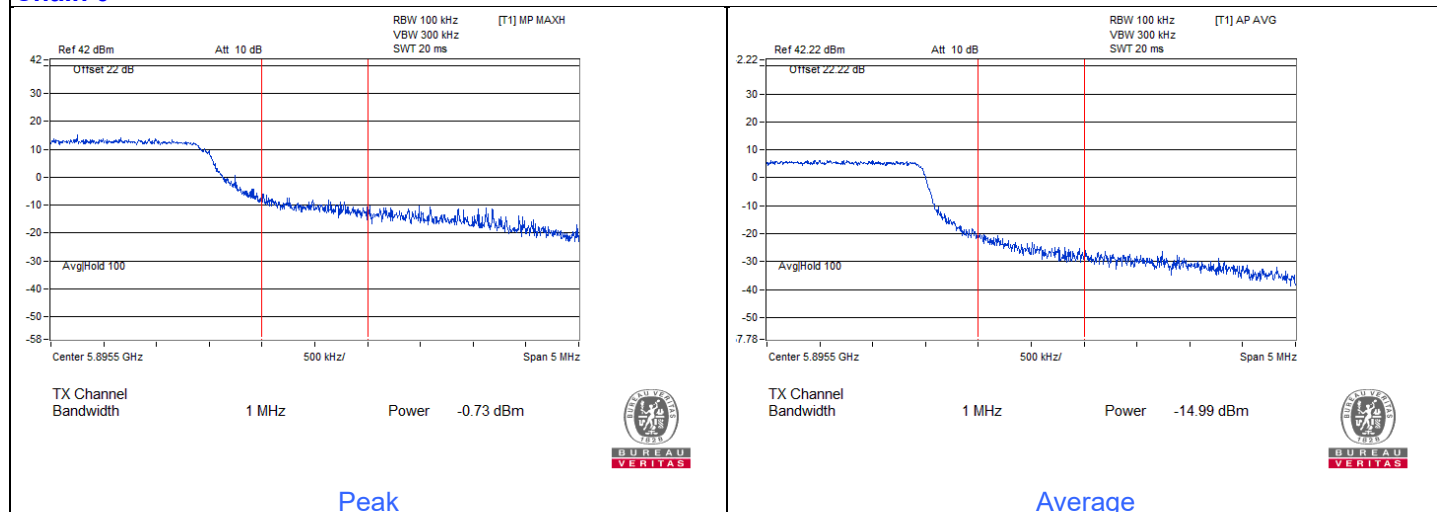


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5836.99	119.67 PK			16.04	8.37	24.41
2	#5629.59	67.13 PK	68.26	-1.13	-36.5	8.37	-28.13
3	#5651.05	67.46 PK	69.04	-1.58	-36.17	8.37	-27.8
4	#5704.5	67.04 PK	106.52	-39.48	-36.59	8.37	-28.22
5	#5720.01	65.46 PK	110.88	-45.42	-38.17	8.37	-29.8
6	#5924.75	67.47 PK	88.44	-20.97	-36.16	8.37	-27.79
7	#5967.68	67.23 PK	88.26	-21.03	-36.4	8.37	-28.03
8	*5841.67	110.41 AV			6.78	8.37	15.15
9	#5924.7	57.69 AV	68.48	-10.79	-45.94	8.37	-37.57
10	#5931.23	57.76 AV	68.26	-10.5	-45.87	8.37	-37.5

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

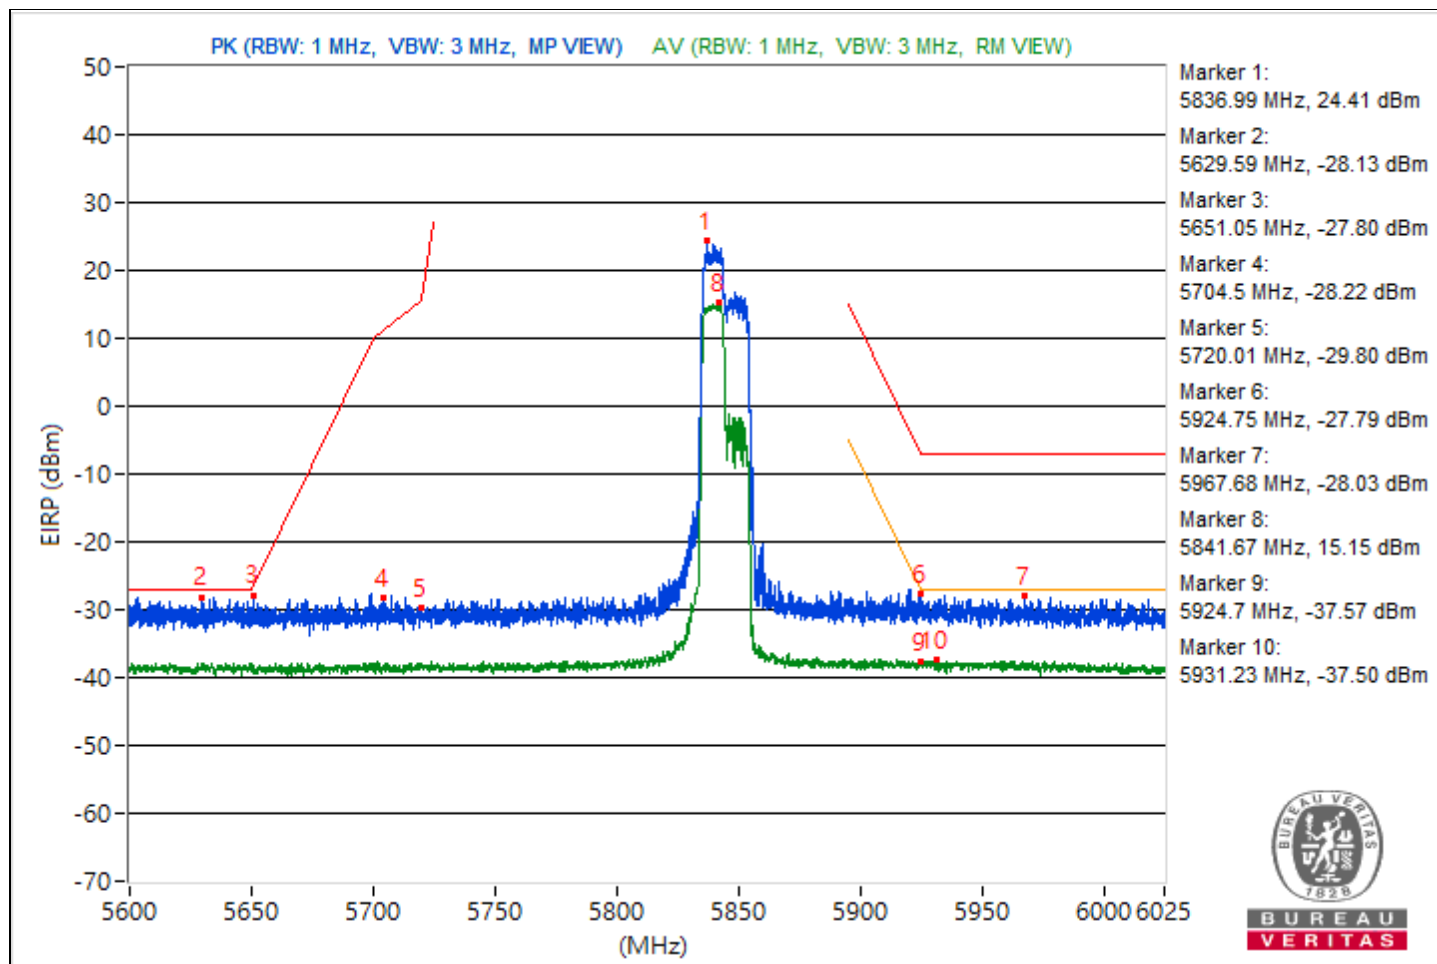


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5860.15	120.53 PK			16.9	8.37	25.27
2	#5601.06	67.46 PK	68.26	-0.8	-36.17	8.37	-27.8
3	#5650.15	66.86 PK	68.37	-1.51	-36.77	8.37	-28.4
4	#5700.83	67.21 PK	105.49	-38.28	-36.42	8.37	-28.05
5	#5720.27	66.06 PK	111.49	-45.43	-37.57	8.37	-29.2
6	#5924.81	66.25 PK	88.4	-22.15	-37.38	8.37	-29.01
7	#5943.13	69.62 PK	88.26	-18.64	-34.01	8.37	-25.64
8	*5862.28	110.41 AV			6.78	8.37	15.15
9	#5924.81	57.23 AV	68.4	-11.17	-46.4	8.37	-38.03
10	#5936.92	57.95 AV	68.26	-10.31	-45.68	8.37	-37.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

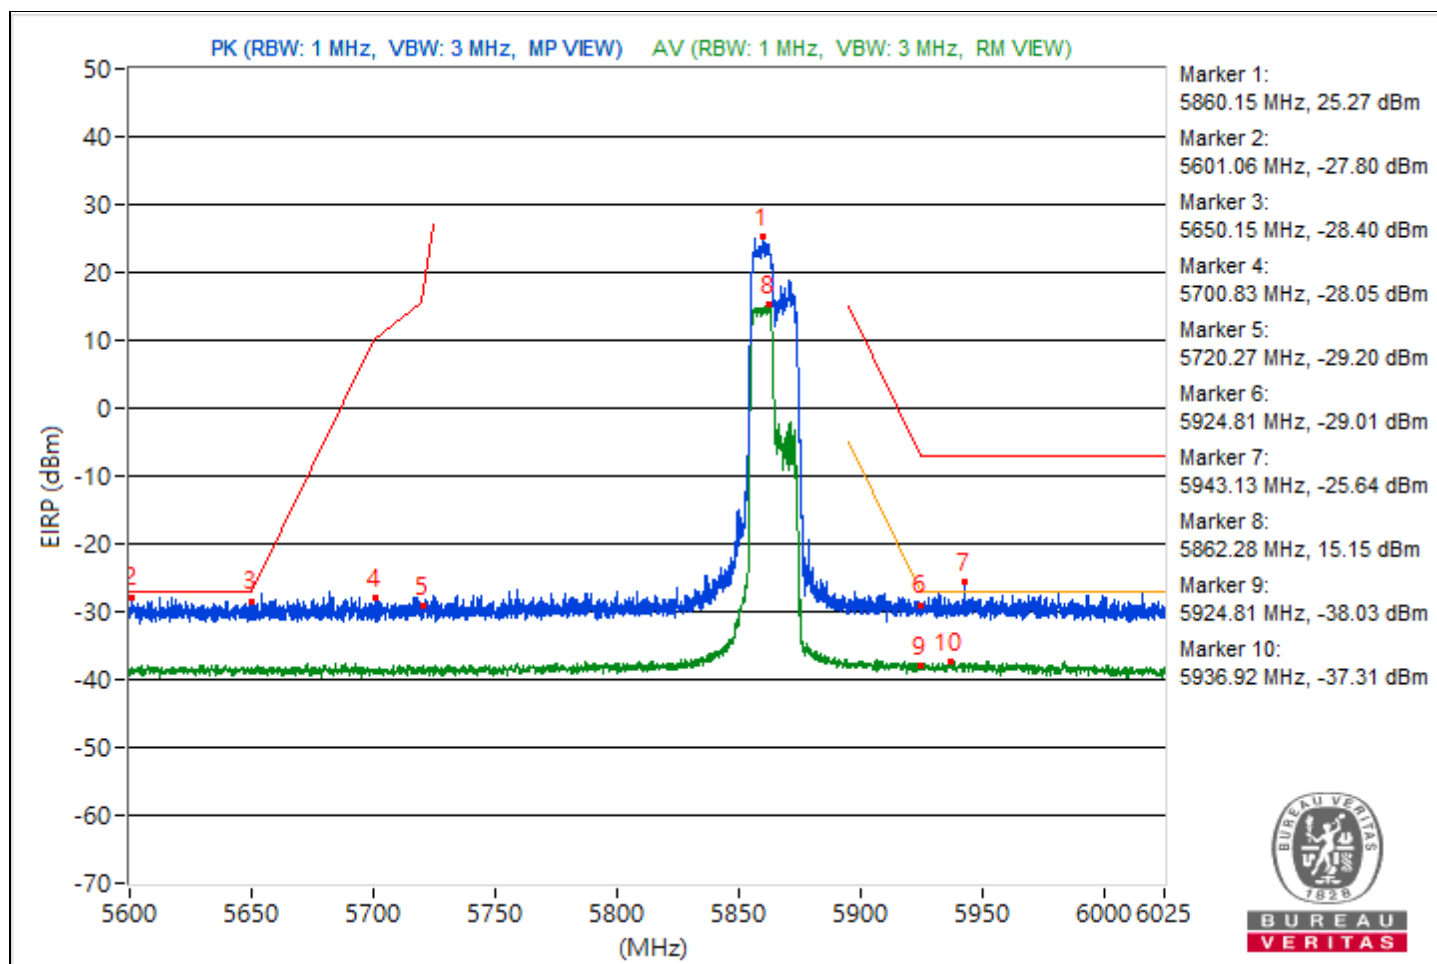


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5895	102.03 PK	110.26	-8.23	-1.6	8.37	6.77
2	#5895	88.41 AV	90.26	-1.85	-15.22	8.37	-6.85

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

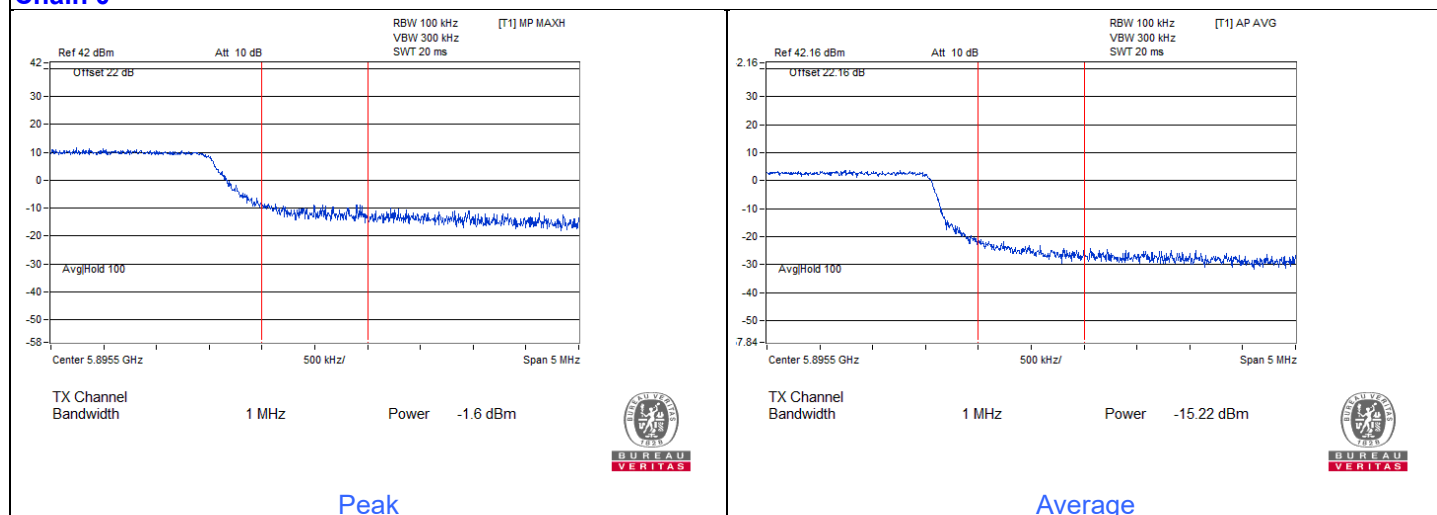


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5840.71	120.59 PK			16.96	8.37	25.33
2	#5626.88	67.4 PK	68.26	-0.86	-36.23	8.37	-27.86
3	#5650.63	67.18 PK	68.72	-1.54	-36.45	8.37	-28.08
4	#5702.11	68.11 PK	105.85	-37.74	-35.52	8.37	-27.15
5	#5720.22	65.49 PK	111.37	-45.88	-38.14	8.37	-29.77
6	#5924.86	66.36 PK	88.36	-22	-37.27	8.37	-28.9
7	#5948.55	68.32 PK	88.26	-19.94	-35.31	8.37	-26.94
8	*5840.34	109.93 AV			6.3	8.37	14.67
9	#5924.54	57.81 AV	68.6	-10.79	-45.82	8.37	-37.45
10	#5934.58	57.87 AV	68.26	-10.39	-45.76	8.37	-37.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

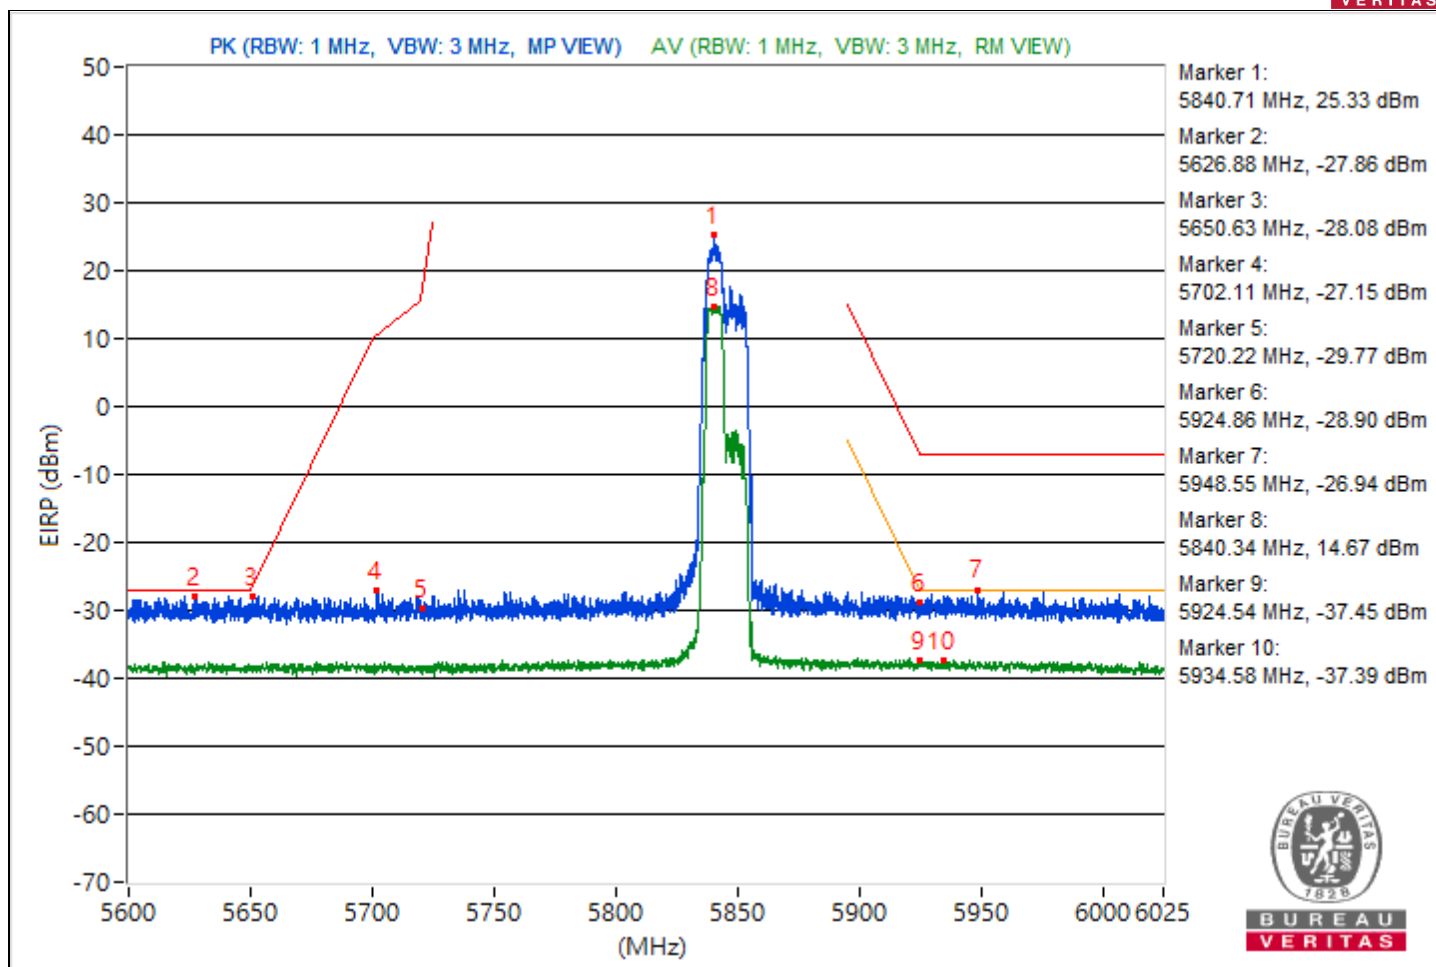


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5858.82	119.65 PK			16.02	8.37	24.39
2	#5627.62	67.32 PK	68.26	-0.94	-36.31	8.37	-27.94
3	#5651.69	66.33 PK	69.51	-3.18	-37.3	8.37	-28.93
4	#5700.51	67.2 PK	105.4	-38.2	-36.43	8.37	-28.06
5	#5720.22	66.63 PK	111.37	-44.74	-37	8.37	-28.63
6	#5923.9	67.05 PK	89.06	-22.01	-36.58	8.37	-28.21
7	#6003.54	67.56 PK	88.26	-20.7	-36.07	8.37	-27.7
8	*5861.85	110.34 AV			6.71	8.37	15.08
9	#5924.86	57.8 AV	68.36	-10.56	-45.83	8.37	-37.46
10	#5959.5	58 AV	68.26	-10.26	-45.63	8.37	-37.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

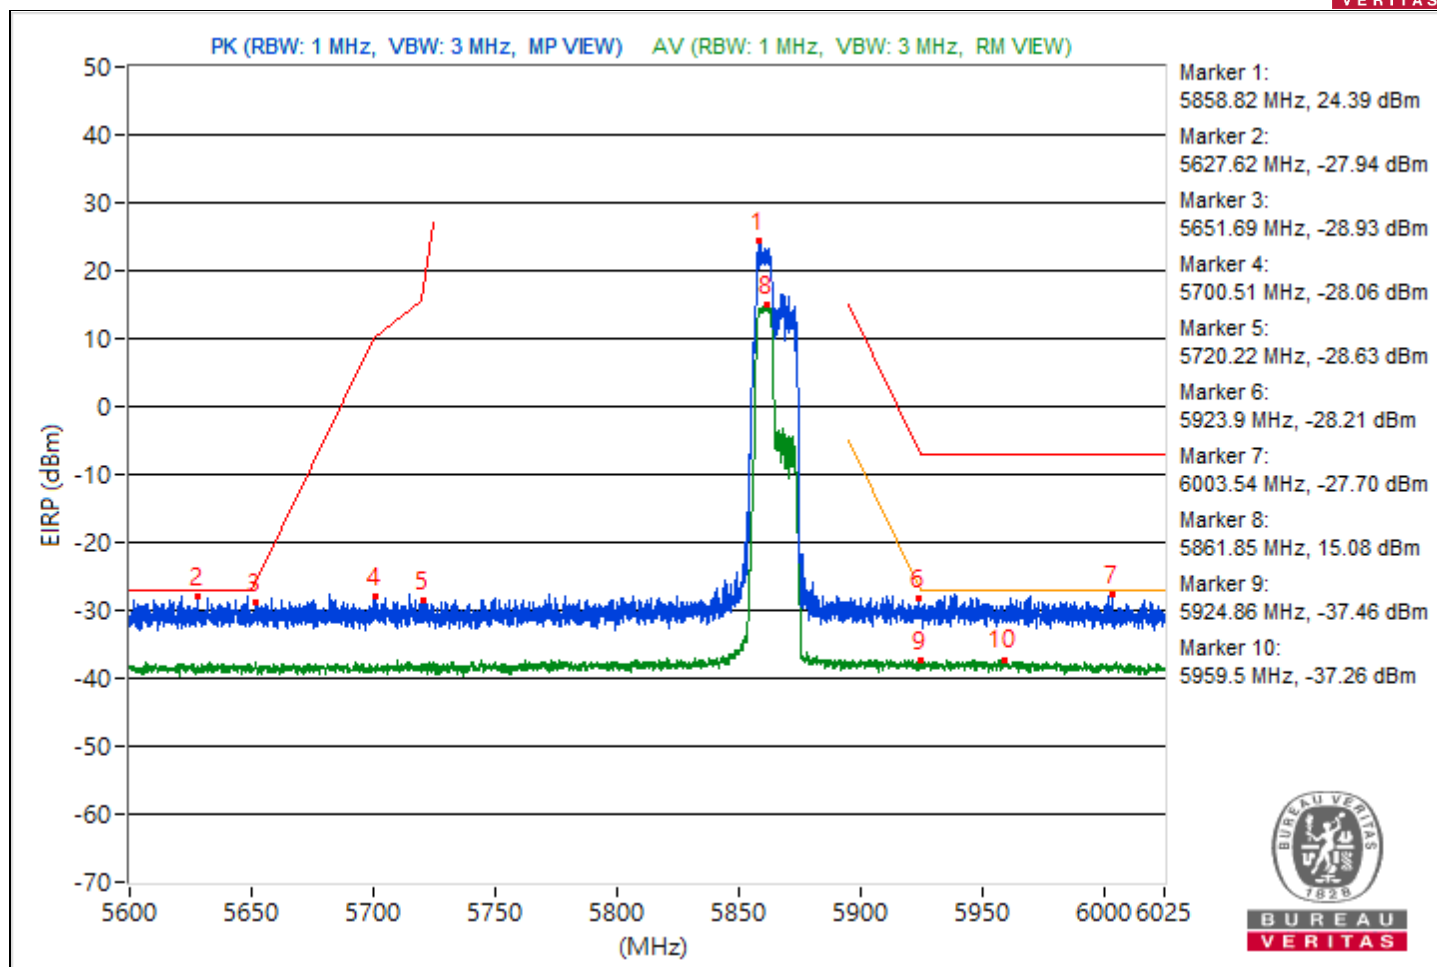


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5890.65	119.34 PK			15.71	8.37	24.08
2	#5625.45	67.58 PK	68.26	-0.68	-36.05	8.37	-27.68
3	#5651.48	66.53 PK	69.35	-2.82	-37.1	8.37	-28.73
4	#5700.83	66.54 PK	105.49	-38.95	-37.09	8.37	-28.72
5	#5720.01	66.28 PK	110.88	-44.6	-37.35	8.37	-28.98
6	#5895	93.94 PK	110.26	-16.32	-9.69	8.37	-1.32
7	#5973.04	68.18 PK	88.26	-20.08	-35.45	8.37	-27.08
8	*5887.94	110.06 AV			6.43	8.37	14.8
9	#5924.65	57.75 AV	68.52	-10.77	-45.88	8.37	-37.51
10	#5925.12	58.24 AV	68.26	-10.02	-45.39	8.37	-37.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

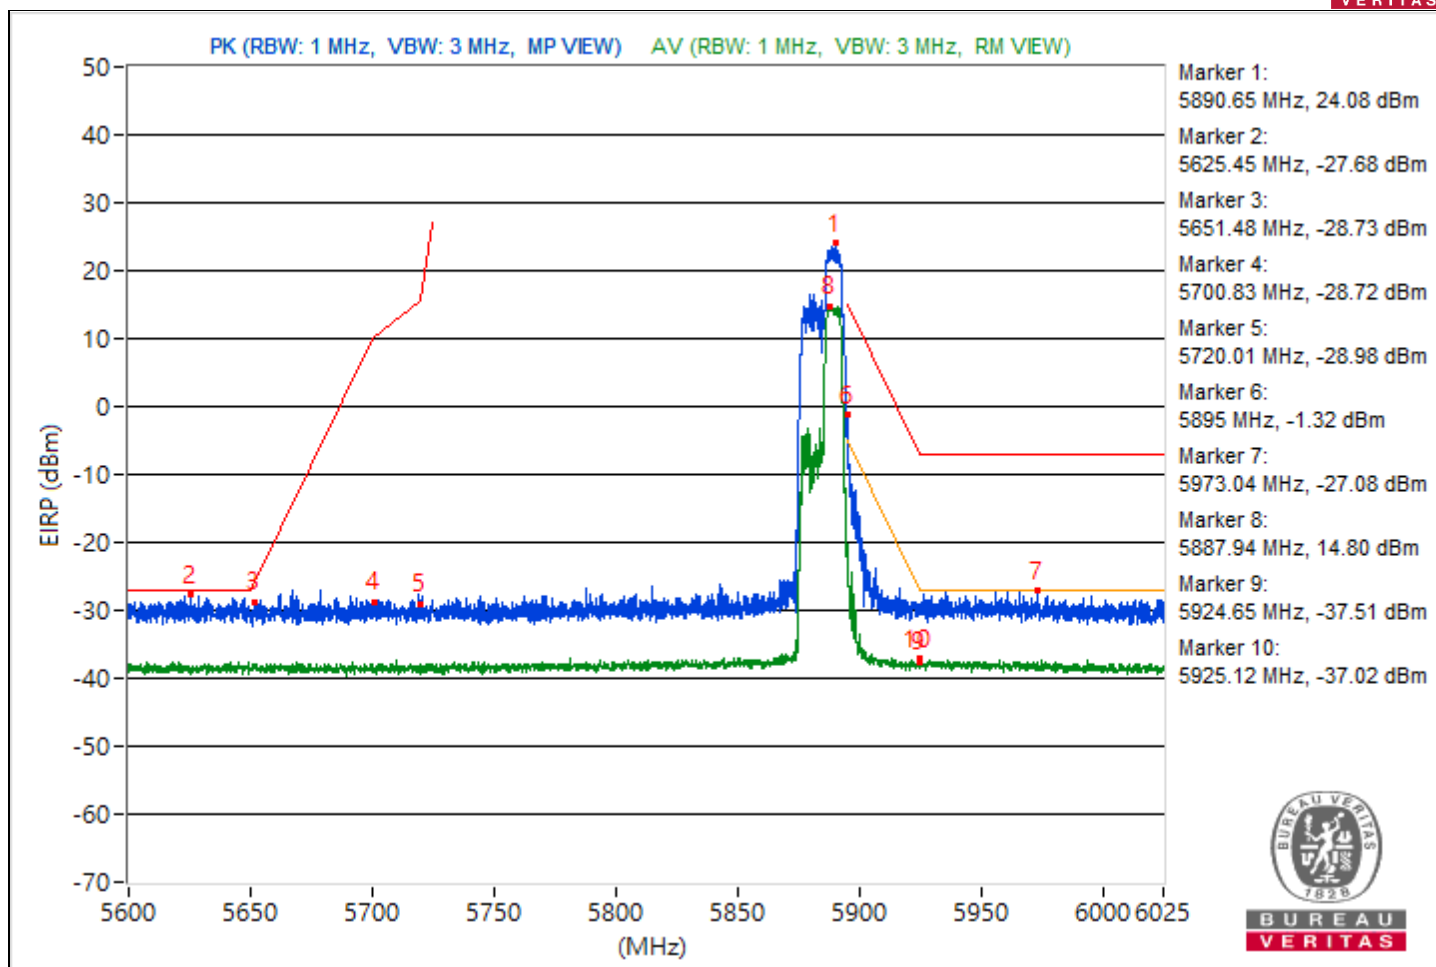


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5843.74	119.04 PK			15.41	8.37	23.78
2	#5627.73	67.54 PK	68.26	-0.72	-36.09	8.37	-27.72
3	#5651.32	65.97 PK	69.24	-3.27	-37.66	8.37	-29.29
4	#5701.15	67.41 PK	105.58	-38.17	-36.22	8.37	-27.85
5	#5720.17	66.21 PK	111.24	-45.03	-37.42	8.37	-29.05
6	#5924.33	66.92 PK	88.75	-21.83	-36.71	8.37	-28.34
7	#5999.39	67.92 PK	88.26	-20.34	-35.71	8.37	-27.34
8	*5843.37	109.94 AV			6.31	8.37	14.68
9	#5923.96	58.16 AV	69.03	-10.87	-45.47	8.37	-37.1
10	#5949.19	58.1 AV	68.26	-10.16	-45.53	8.37	-37.16

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

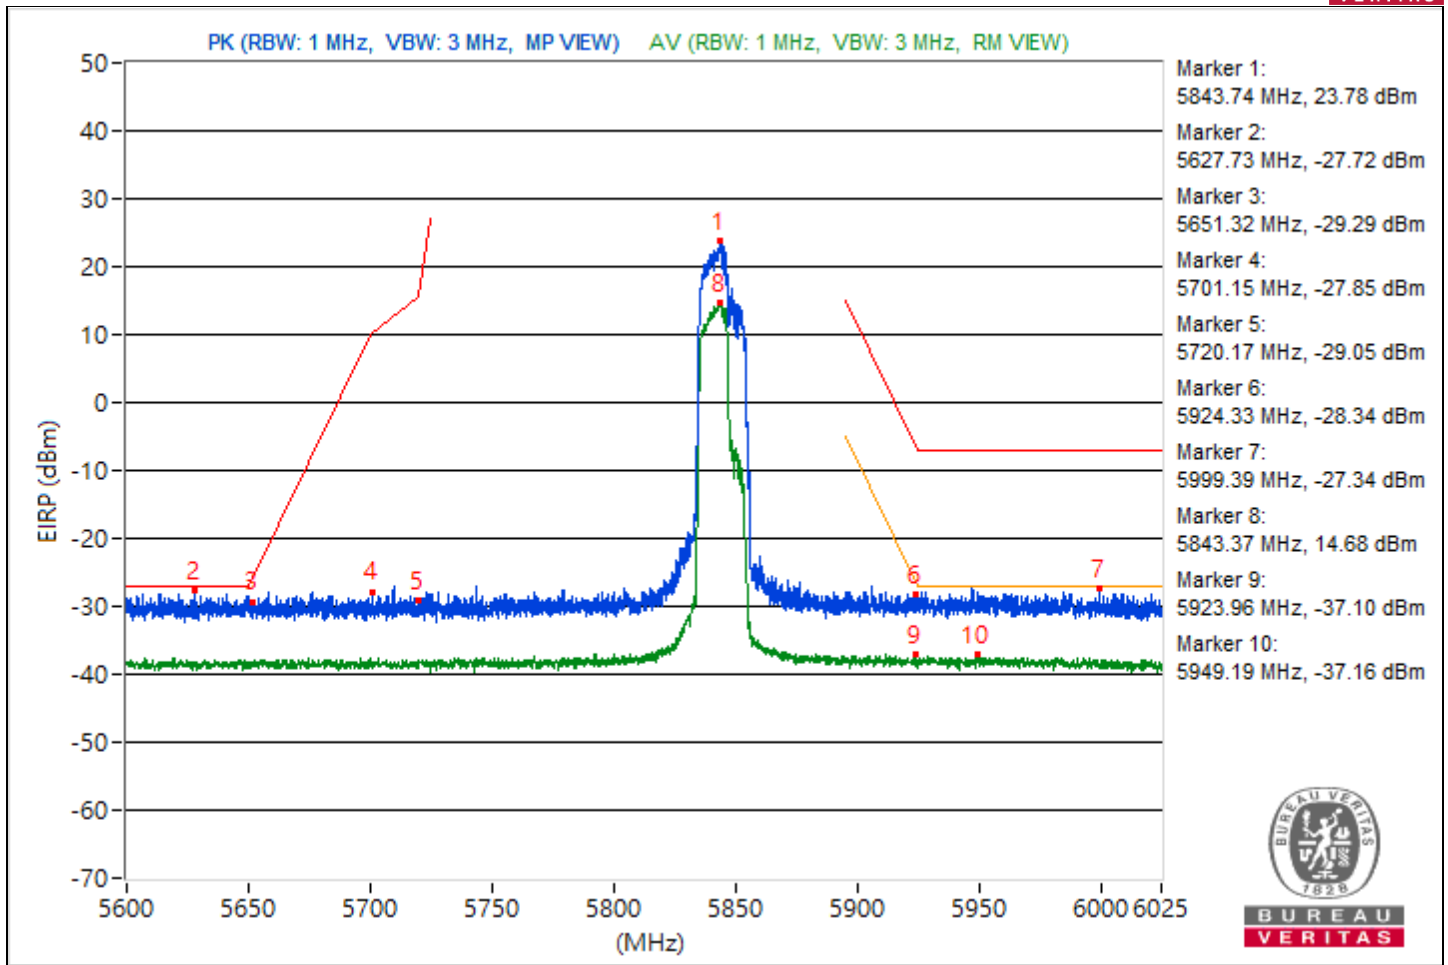


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5863.66	118.19 PK			14.56	8.37	22.93
2	#5625.29	66.99 PK	68.26	-1.27	-36.64	8.37	-28.27
3	#5650.26	65.77 PK	68.45	-2.68	-37.86	8.37	-29.49
4	#5701.57	66.5 PK	105.7	-39.2	-37.13	8.37	-28.76
5	#5720.33	66.8 PK	111.61	-44.81	-36.83	8.37	-28.46
6	#5924.91	66.98 PK	88.32	-21.34	-36.65	8.37	-28.28
7	#5934.42	68.62 PK	88.26	-19.64	-35.01	8.37	-26.64
8	*5864.03	109.91 AV			6.28	8.37	14.65
9	#5924.91	57.31 AV	68.32	-11.01	-46.32	8.37	-37.95
10	#5954.29	57.93 AV	68.26	-10.33	-45.7	8.37	-37.33

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

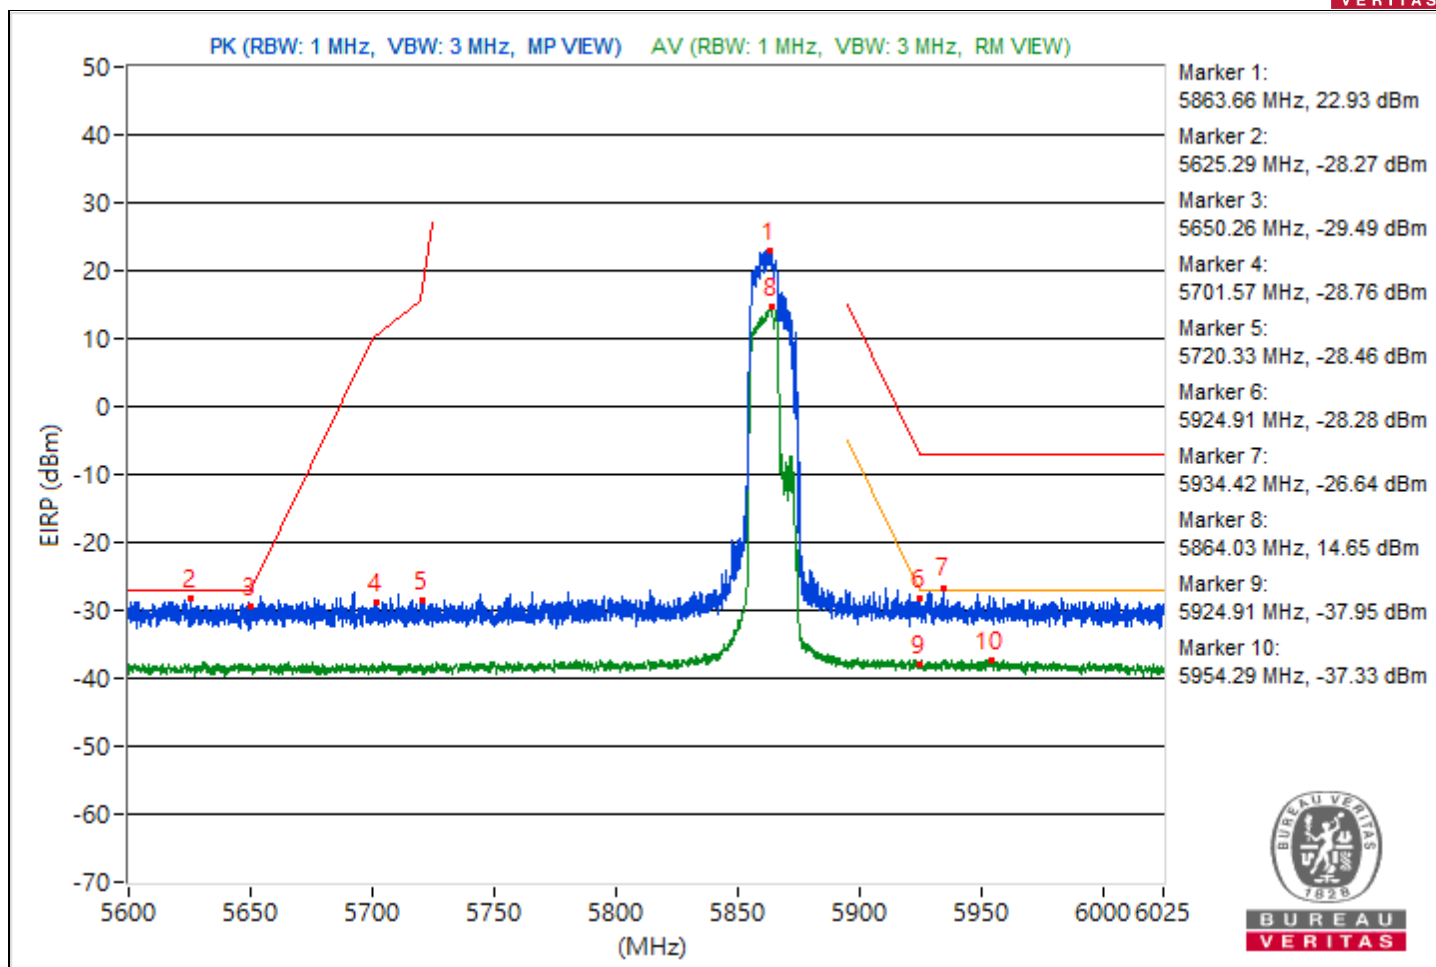


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5895	100.97 PK	110.26	-9.29	-2.66	8.37	5.71
2	#5895	88.31 AV	90.26	-1.95	-15.32	8.37	-6.95

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

Chain 0

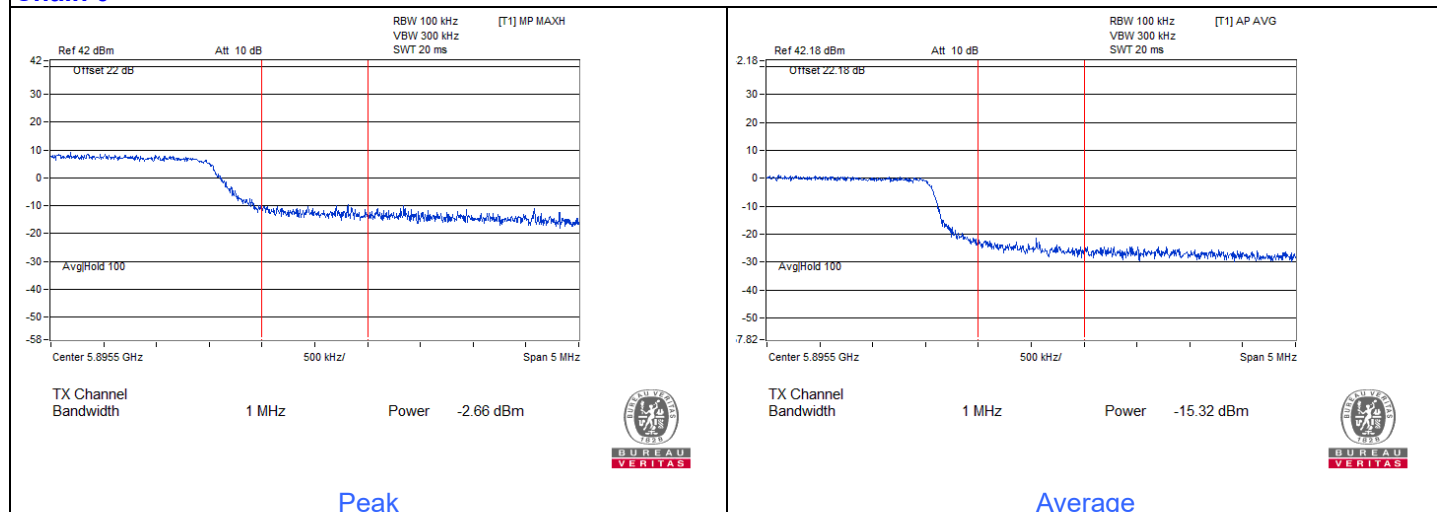


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5852.13	118.67 PK			15.04	8.37	23.41
2	#5641.38	67.41 PK	68.26	-0.85	-36.22	8.37	-27.85
3	#5649.99	65.83 PK	68.26	-2.43	-37.8	8.37	-29.43
4	#5703.97	67.05 PK	106.37	-39.32	-36.58	8.37	-28.21
5	#5720.01	66.57 PK	110.88	-44.31	-37.06	8.37	-28.69
6	#5905.36	95.69 PK	102.66	-6.97	-7.94	8.37	0.43
7	#5928.42	70.23 PK	88.26	-18.03	-33.4	8.37	-25.03
8	*5857.66	109.44 AV			5.81	8.37	14.18
9	#5895	89.44 AV	90.26	-0.82	-14.19	8.37	-5.82
10	#5931.39	60.77 AV	68.26	-7.49	-42.86	8.37	-34.49

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

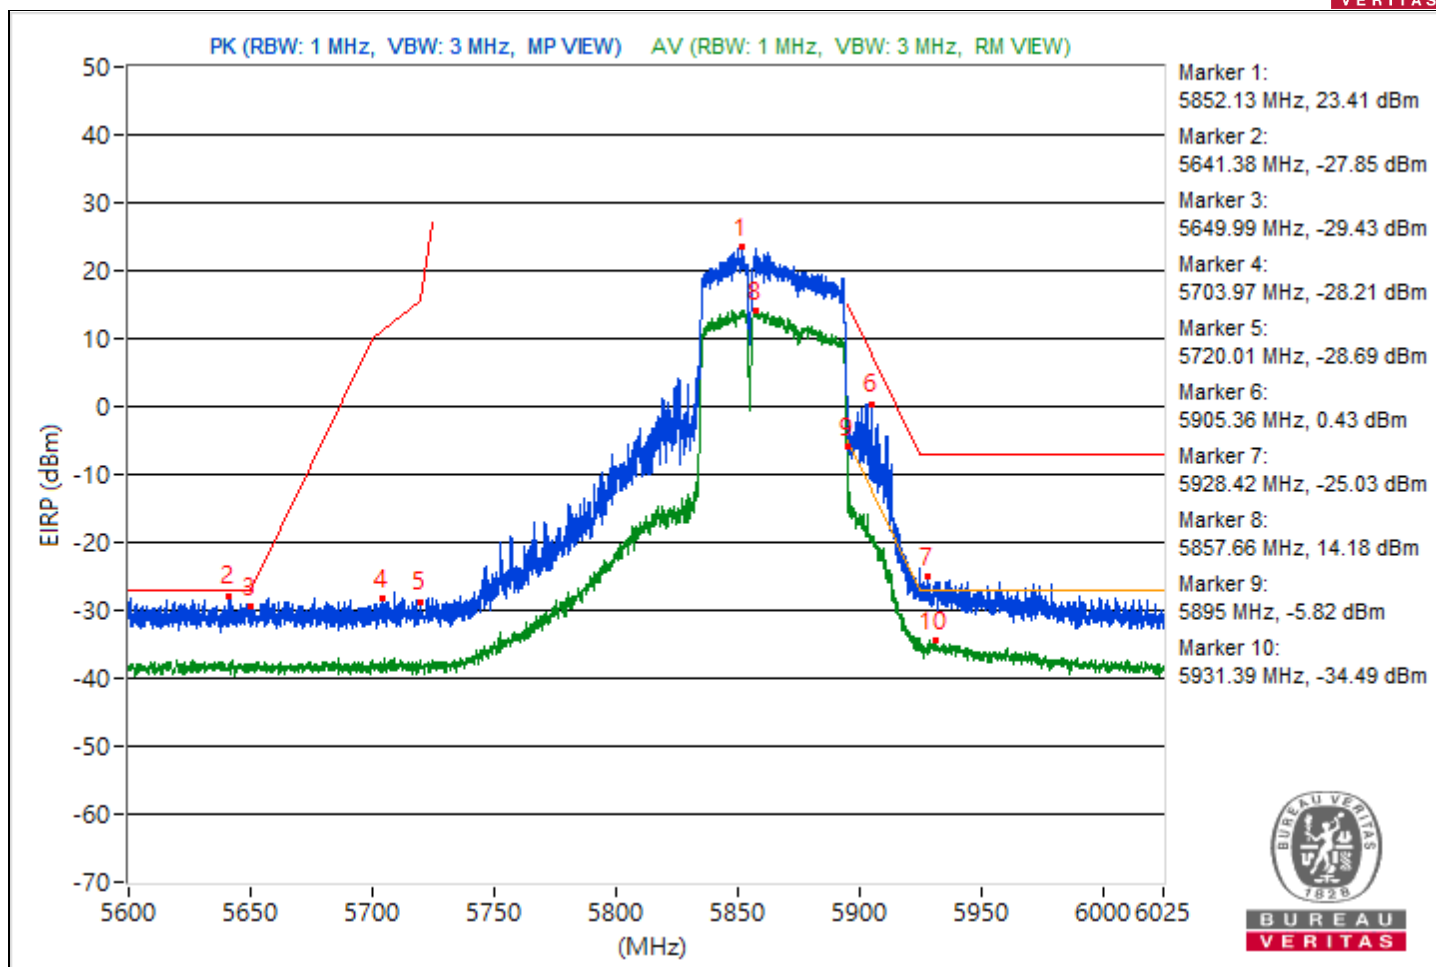


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5817.76	112.76 PK			9.13	8.37	17.5
2	#5644.36	66.66 PK	68.26	-1.6	-36.97	8.37	-28.6
3	#5650.57	67.47 PK	68.69	-1.22	-36.16	8.37	-27.79
4	#5701.47	66.87 PK	105.67	-38.8	-36.76	8.37	-28.39
5	#5720.54	66.96 PK	112.09	-45.13	-36.67	8.37	-28.3
6	#5923.48	70.01 PK	89.38	-19.37	-33.62	8.37	-25.25
7	#5927.62	70.63 PK	88.26	-17.63	-33	8.37	-24.63
8	*5816.91	104.08 AV			0.45	8.37	8.82
9	#5924.91	60.87 AV	68.32	-7.45	-42.76	8.37	-34.39
10	#5927.2	60.78 AV	68.26	-7.48	-42.85	8.37	-34.48

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

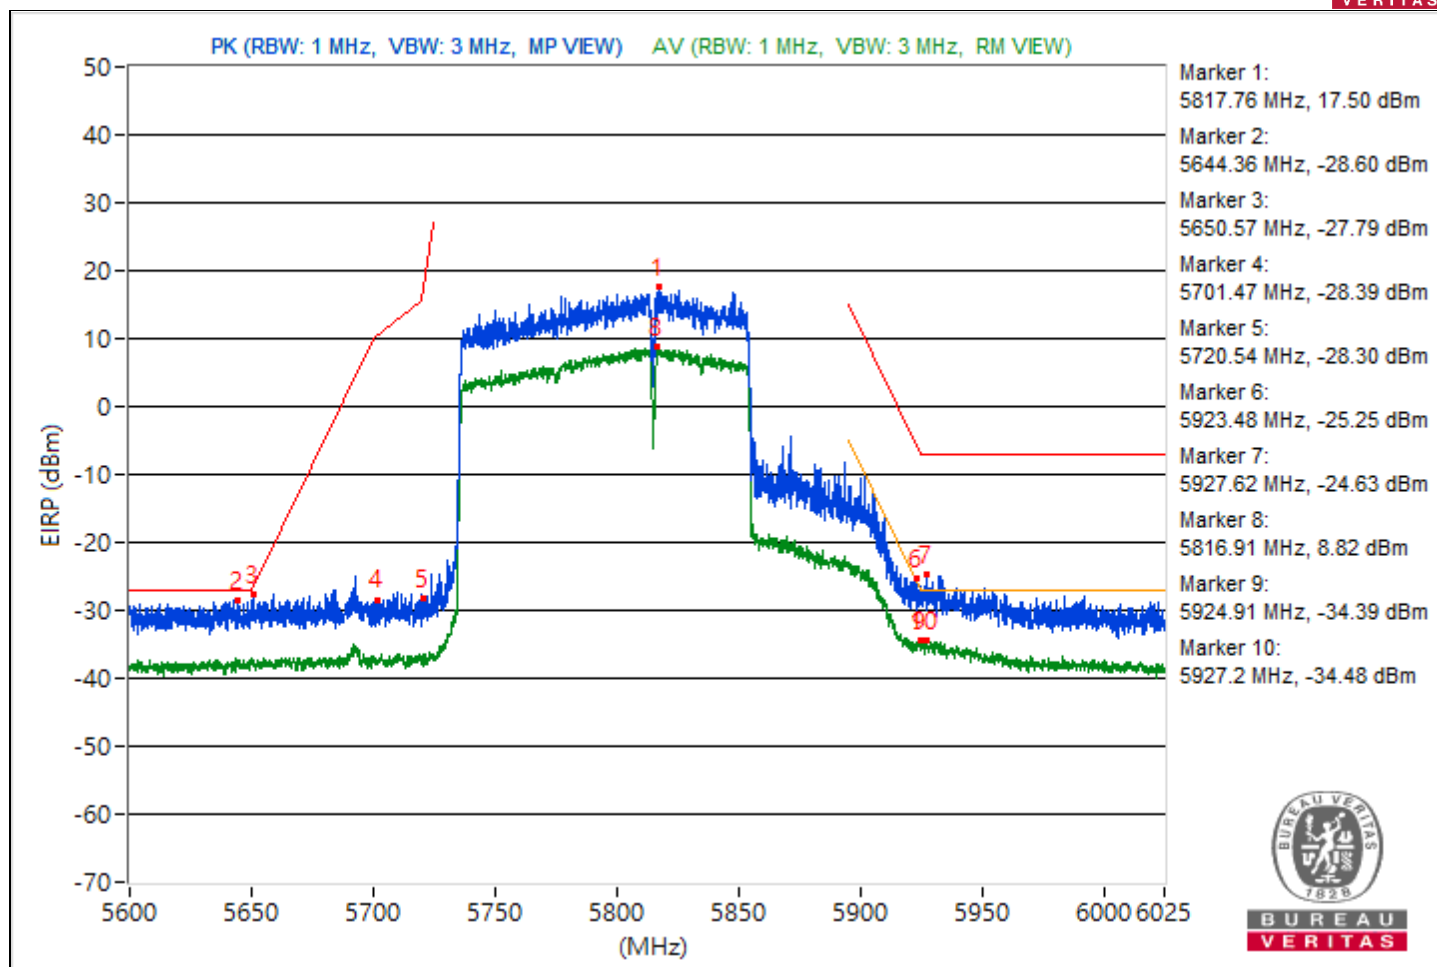


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 60% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5811.49	113.11 PK			9.48	8.37	17.85
2	#5641.65	67.55 PK	68.26	-0.71	-36.08	8.37	-27.71
3	#5651.27	66.78 PK	69.2	-2.42	-36.85	8.37	-28.48
4	#5702.21	69.05 PK	105.88	-36.83	-34.58	8.37	-26.21
5	#5720.7	66.36 PK	112.46	-46.1	-37.27	8.37	-28.9
6	#5905.52	84.13 PK	102.54	-18.41	-19.5	8.37	-11.13
7	#5960.82	72.39 PK	88.26	-15.87	-31.24	8.37	-22.87
8	*5819.57	103.79 AV			0.16	8.37	8.53
9	#5923.85	61.52 AV	69.1	-7.58	-42.11	8.37	-33.74
10	#5929.91	61.84 AV	68.26	-6.42	-41.79	8.37	-33.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

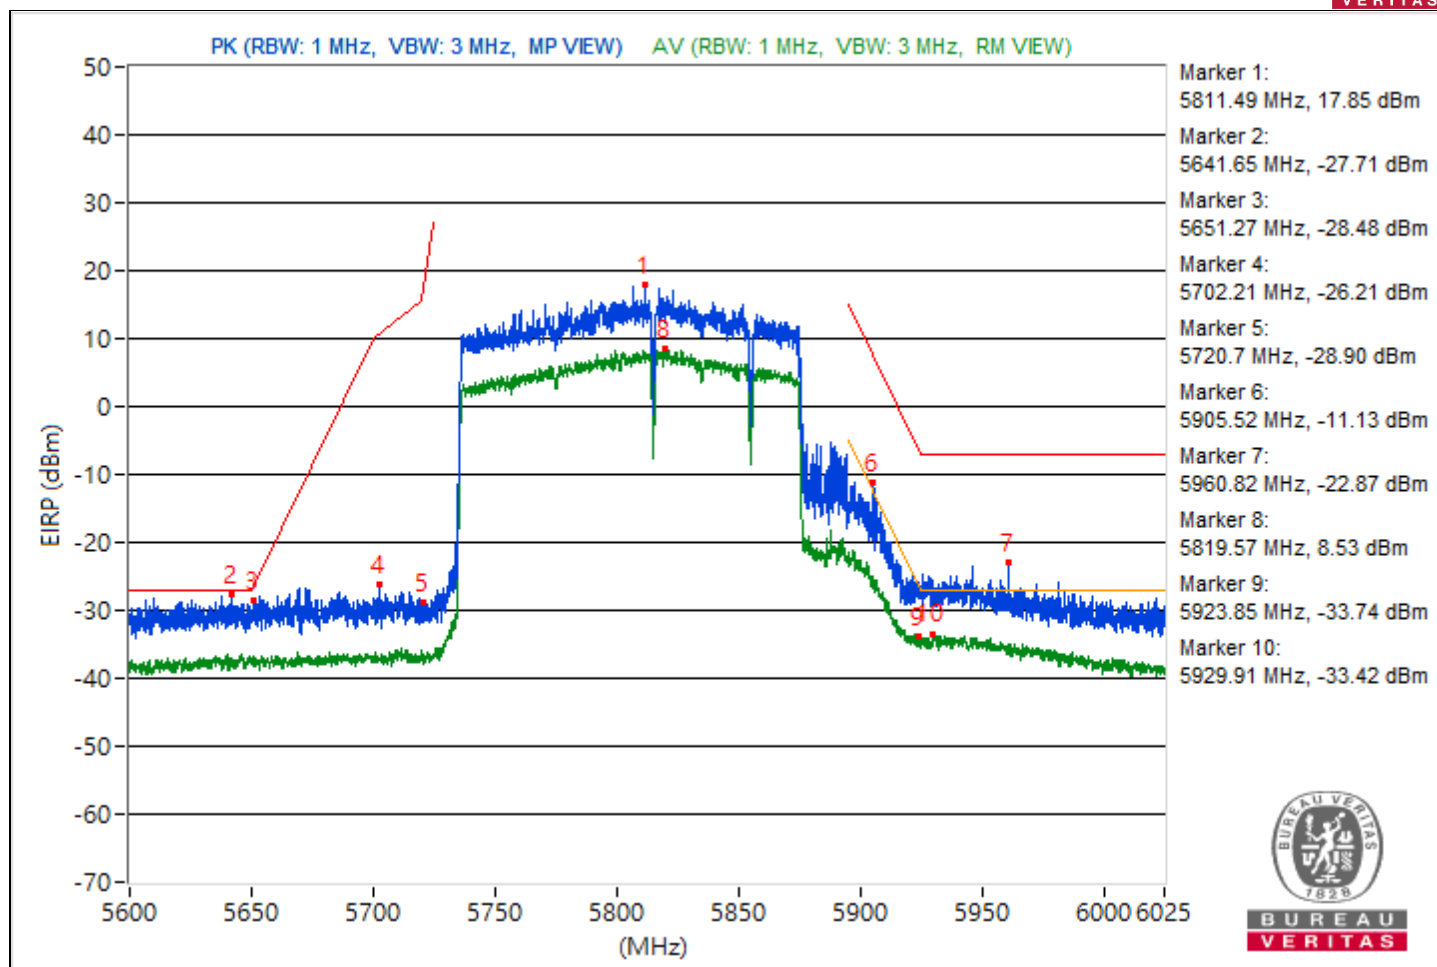


2TX


Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4675.86	49.88 PK	74	-24.12	-59.1	-60.57	11.38	-45.38
2	4675.86	42.79 AV	54	-11.21	-65.42	-69.03	11.38	-52.47
3	11047.56	48.78 PK	74	-25.22	-59.72	-62.42	11.38	-46.48
4	11047.56	40.96 AV	54	-13.04	-68.29	-69.13	11.38	-54.3
5	19157.9	51.42 PK	74	-22.58	-57.42	-59.24	11.38	-43.84
6	19157.9	43.16 AV	54	-10.84	-66.14	-66.88	11.38	-52.1
7	22211.5	52.26 PK	74	-21.74	-57.55	-57.24	11.38	-43
8	22211.5	44.71 AV	54	-9.29	-64.73	-65.17	11.38	-50.55
9	38827.82	55.03 PK	74	-18.97	-55.07	-54.22	11.38	-40.23
10	38827.82	49.07 AV	54	-4.93	-60.36	-60.83	11.38	-46.19

Note: Margin value = Emission Level - Limit value

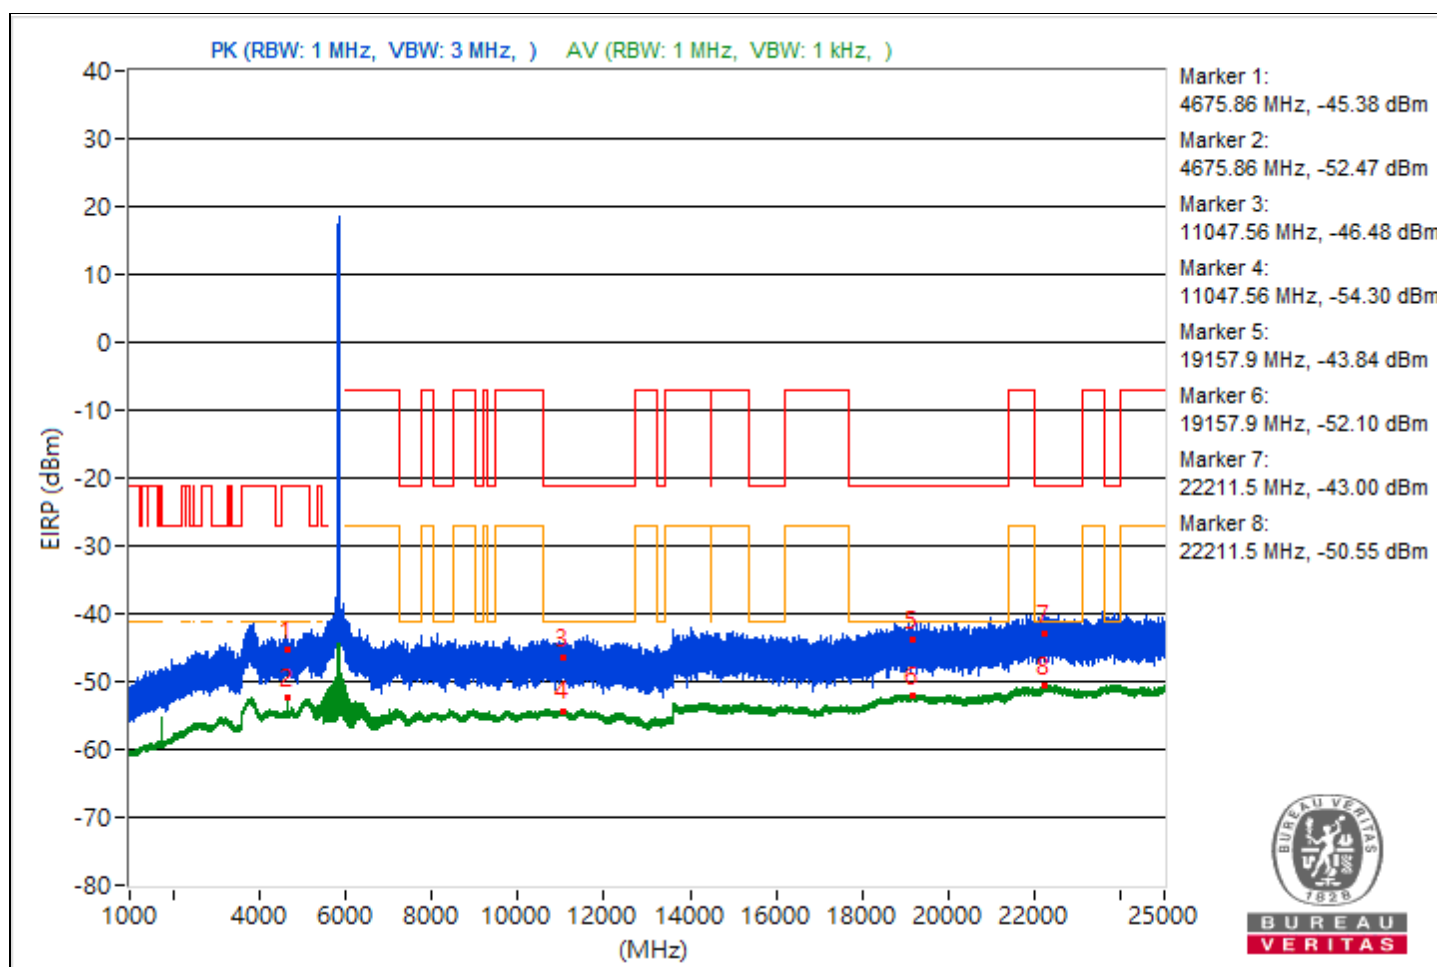


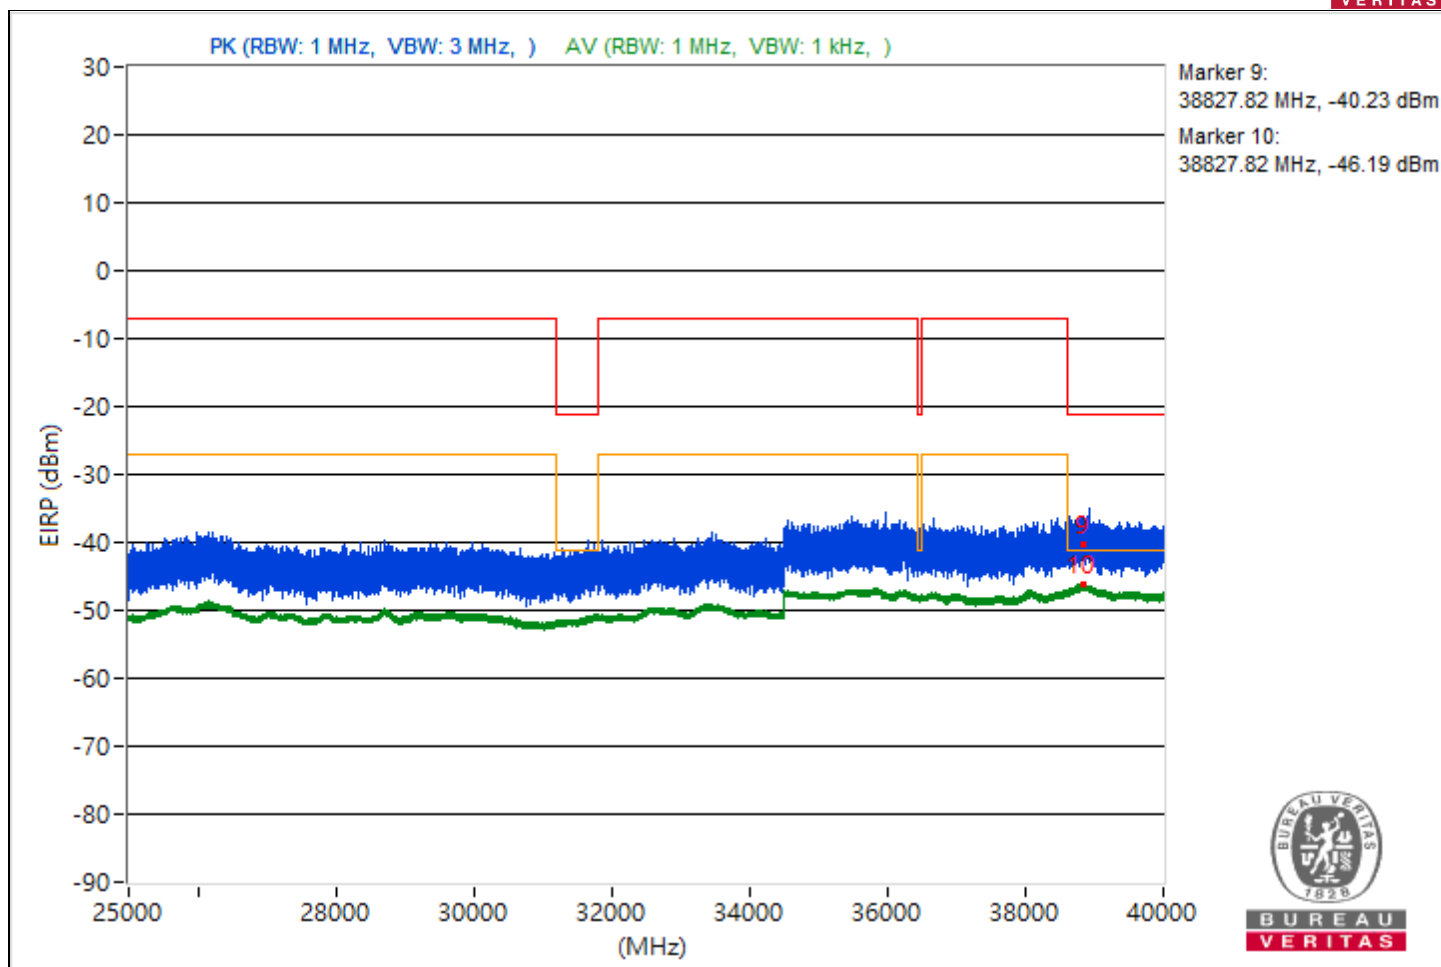


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4691.96	51.03 PK	74	-22.97	-56.8	-61.83	11.38	-44.23
2	4691.96	43.17 AV	54	-10.83	-64.93	-68.9	11.38	-52.09
3	11015.91	48.1 PK	74	-25.9	-61.69	-61.41	11.38	-47.16
4	11015.91	40.91 AV	54	-13.09	-69.14	-68.37	11.38	-54.35
5	18827.4	49.68 PK	74	-24.32	-59.14	-60.99	11.38	-45.58
6	18827.4	43.2 AV	54	-10.8	-66.15	-66.77	11.38	-52.06
7	22291.8	53.92 PK	74	-20.08	-56.37	-55.17	11.38	-41.34
8	22291.8	44.76 AV	54	-9.24	-65.11	-64.68	11.38	-50.5
9	38862.49	55.61 PK	74	-18.39	-52.83	-55.73	11.38	-39.65
10	38862.49	48.94 AV	54	-5.06	-60.43	-61.01	11.38	-46.32

Note: Margin value = Emission Level - Limit value

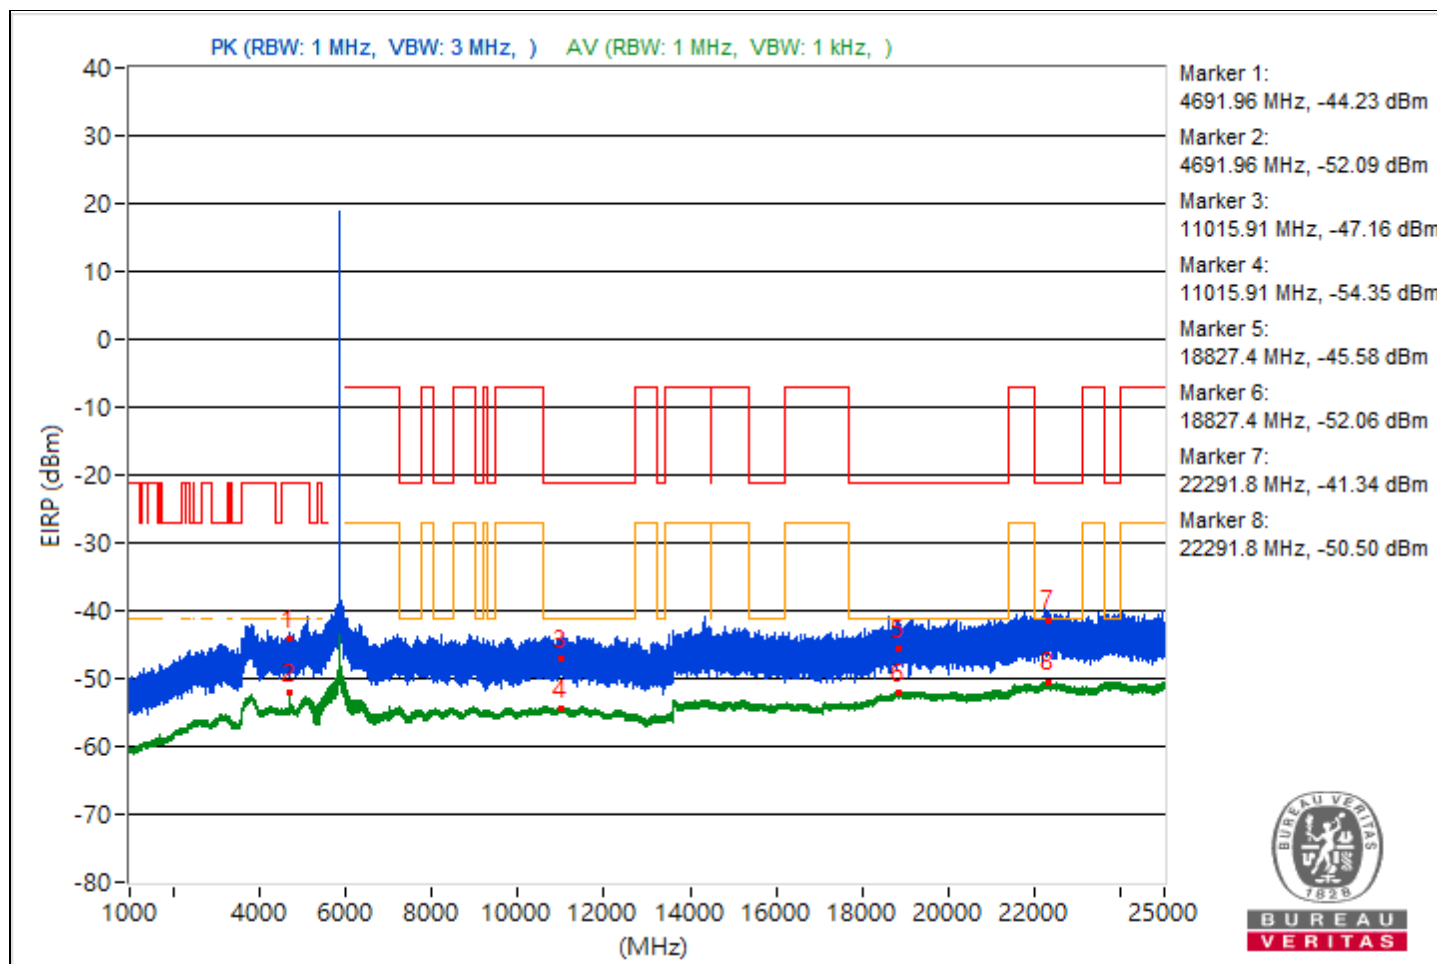


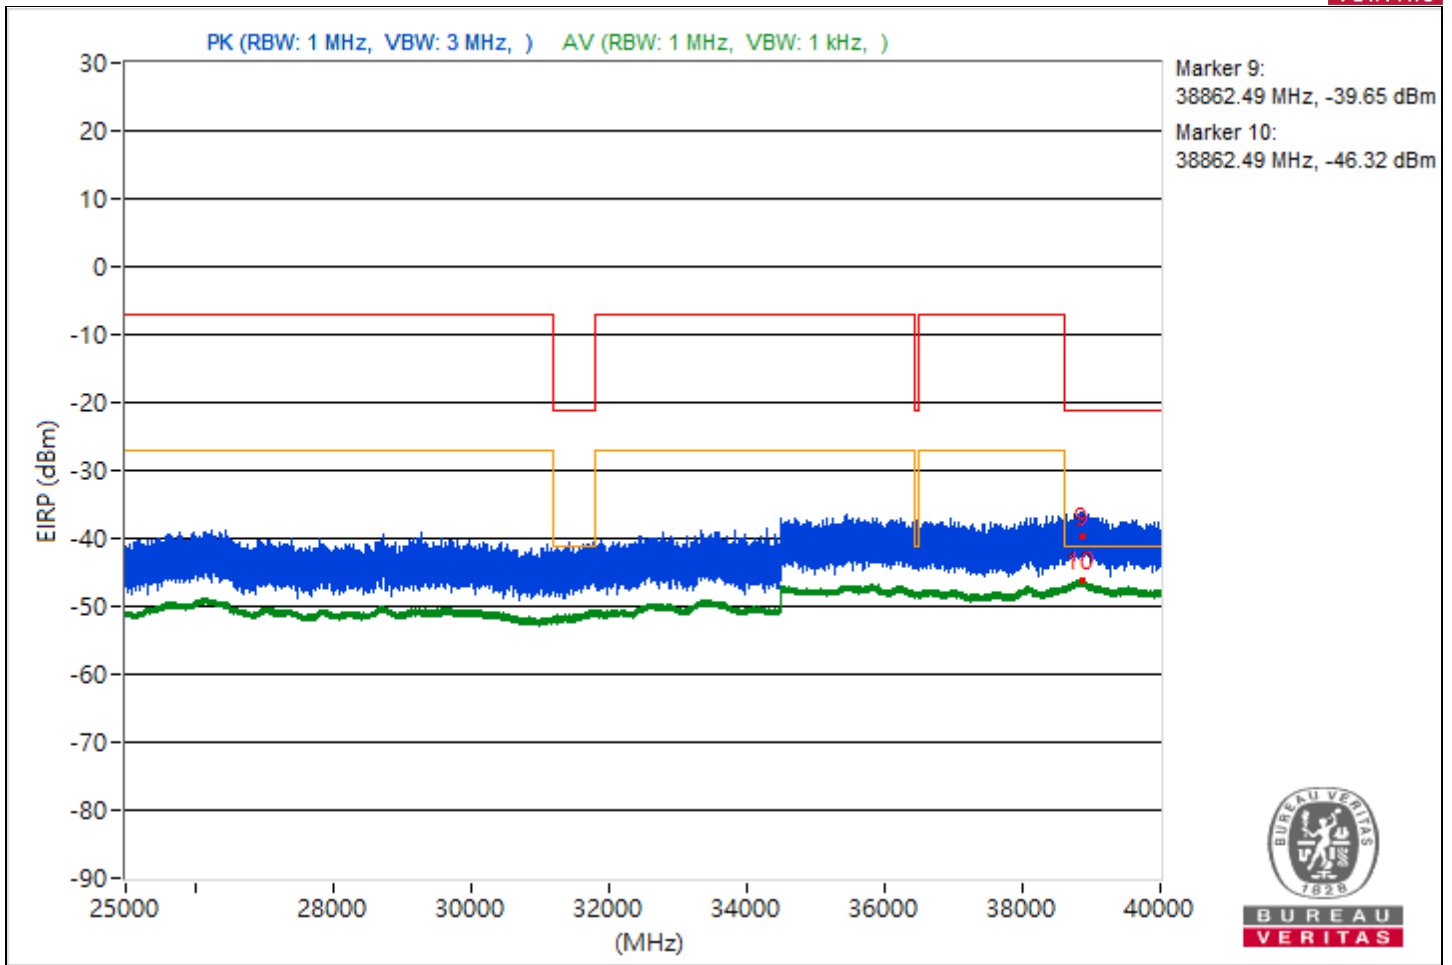


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4707.82	49.47 PK	74	-24.53	-59.59	-60.86	11.38	-45.79
2	4707.82	43.95 AV	54	-10.05	-63.83	-69.05	11.38	-51.31
3	11102.67	48.52 PK	74	-25.48	-60.14	-62.4	11.38	-46.74
4	11102.67	41.1 AV	54	-12.9	-68.17	-68.96	11.38	-54.16
5	18997.6	49.82 PK	74	-24.18	-60.13	-59.56	11.38	-45.44
6	18997.6	43.3 AV	54	-10.7	-65.98	-66.75	11.38	-51.96
7	22259.3	52.5 PK	74	-21.5	-56.42	-58.02	11.38	-42.76
8	22259.3	44.75 AV	54	-9.25	-65.09	-64.71	11.38	-50.51
9	38784.89	55.05 PK	74	-18.95	-54.29	-54.94	11.38	-40.21
10	38784.89	49.07 AV	54	-4.93	-60.39	-60.78	11.38	-46.19

Note: Margin value = Emission Level - Limit value

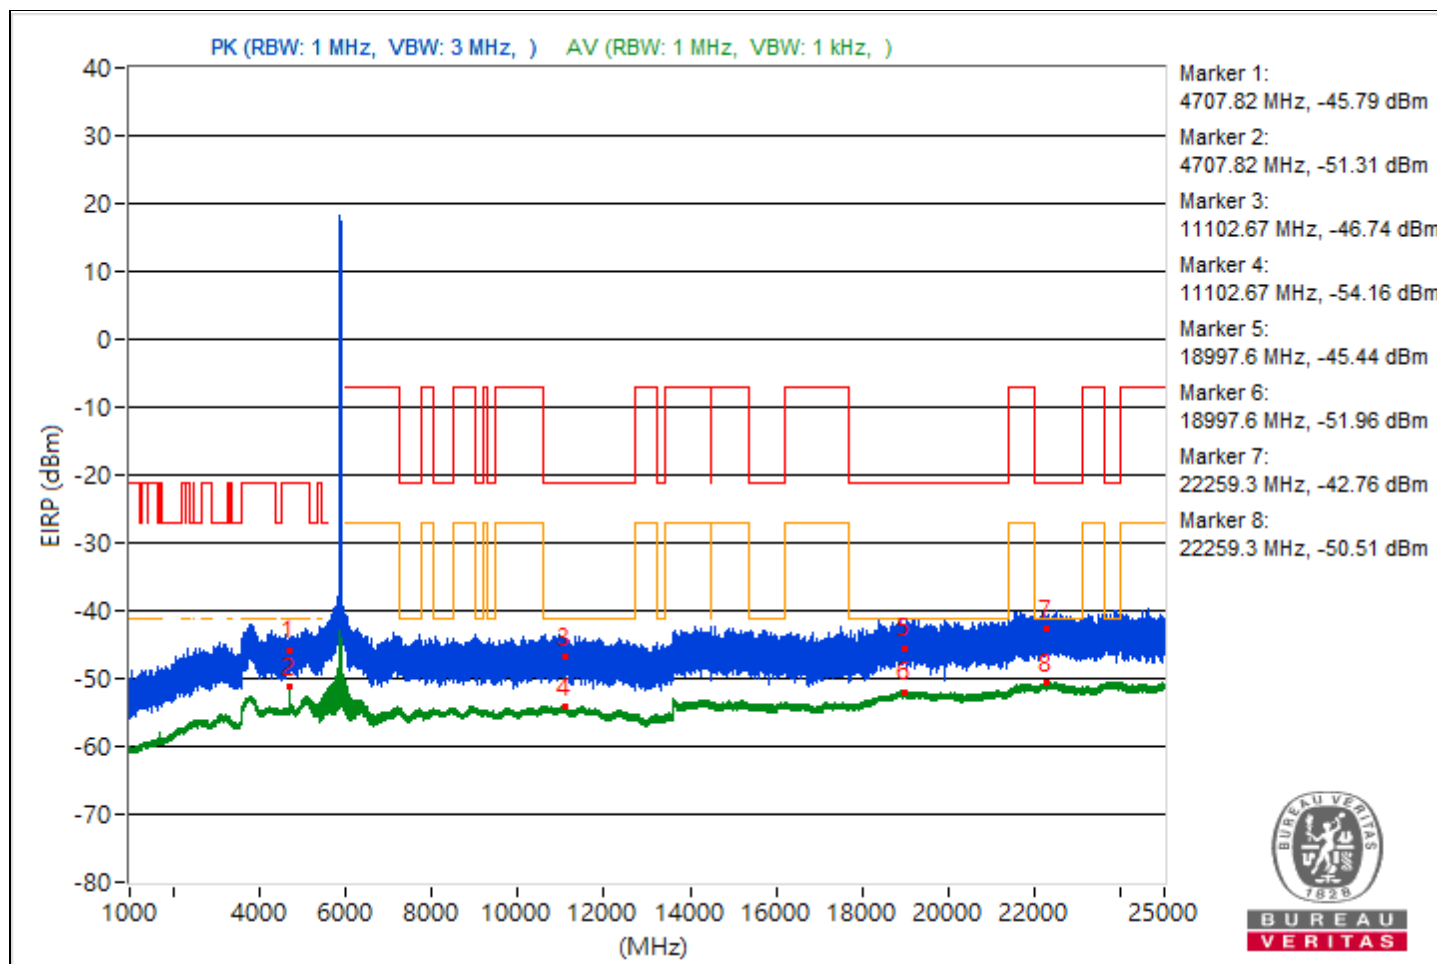

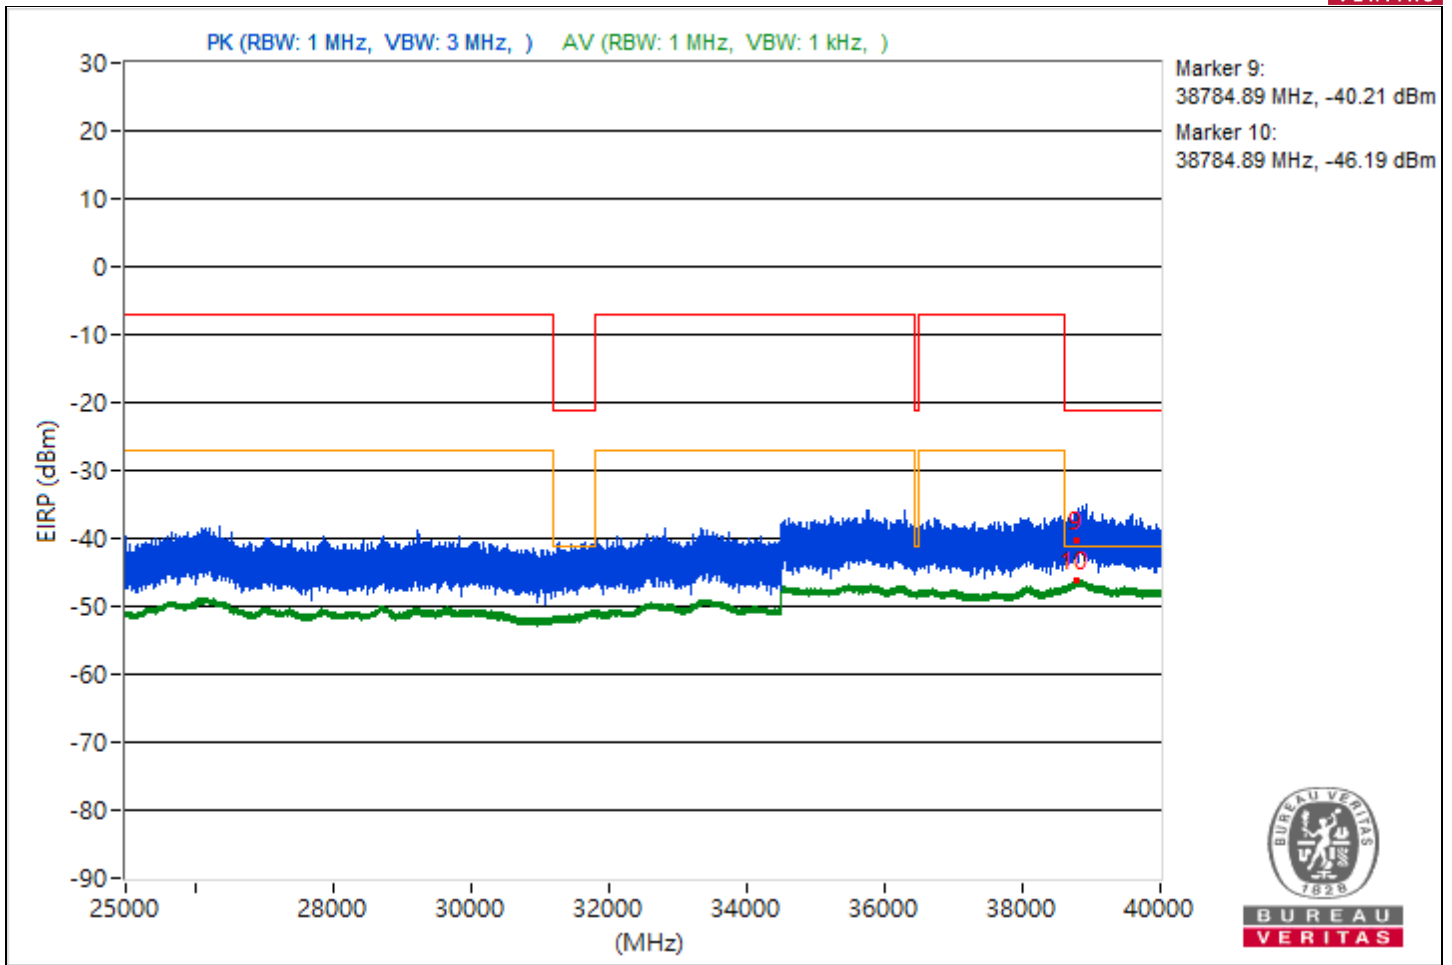



2S2T

RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4675.93	47.43 PK	74	-26.57	-57.63	-61.73	8.37	-47.83
2	4675.93	42.94 AV	54	-11.06	-61.34	-69.26	8.37	-52.32
3	10698.84	43.47 PK	74	-30.53	-62.49	-63.98	8.37	-51.79
4	10698.84	38.13 AV	54	-15.87	-68.79	-68.25	8.37	-57.13
5	18919.9	47.07 PK	74	-26.93	-58.59	-60.83	8.37	-48.19
6	18919.9	40.05 AV	54	-13.95	-66.2	-67.03	8.37	-55.21
7	22233.1	48.67 PK	74	-25.33	-58.23	-57.72	8.37	-46.59
8	22233.1	41.51 AV	54	-12.49	-65.67	-64.65	8.37	-53.75
9	38820.18	52.45 PK	74	-21.55	-53.5	-55.01	8.37	-42.81
10	38820.18	46.31 AV	54	-7.69	-60.07	-60.6	8.37	-48.95

Note: Margin value = Emission Level - Limit value

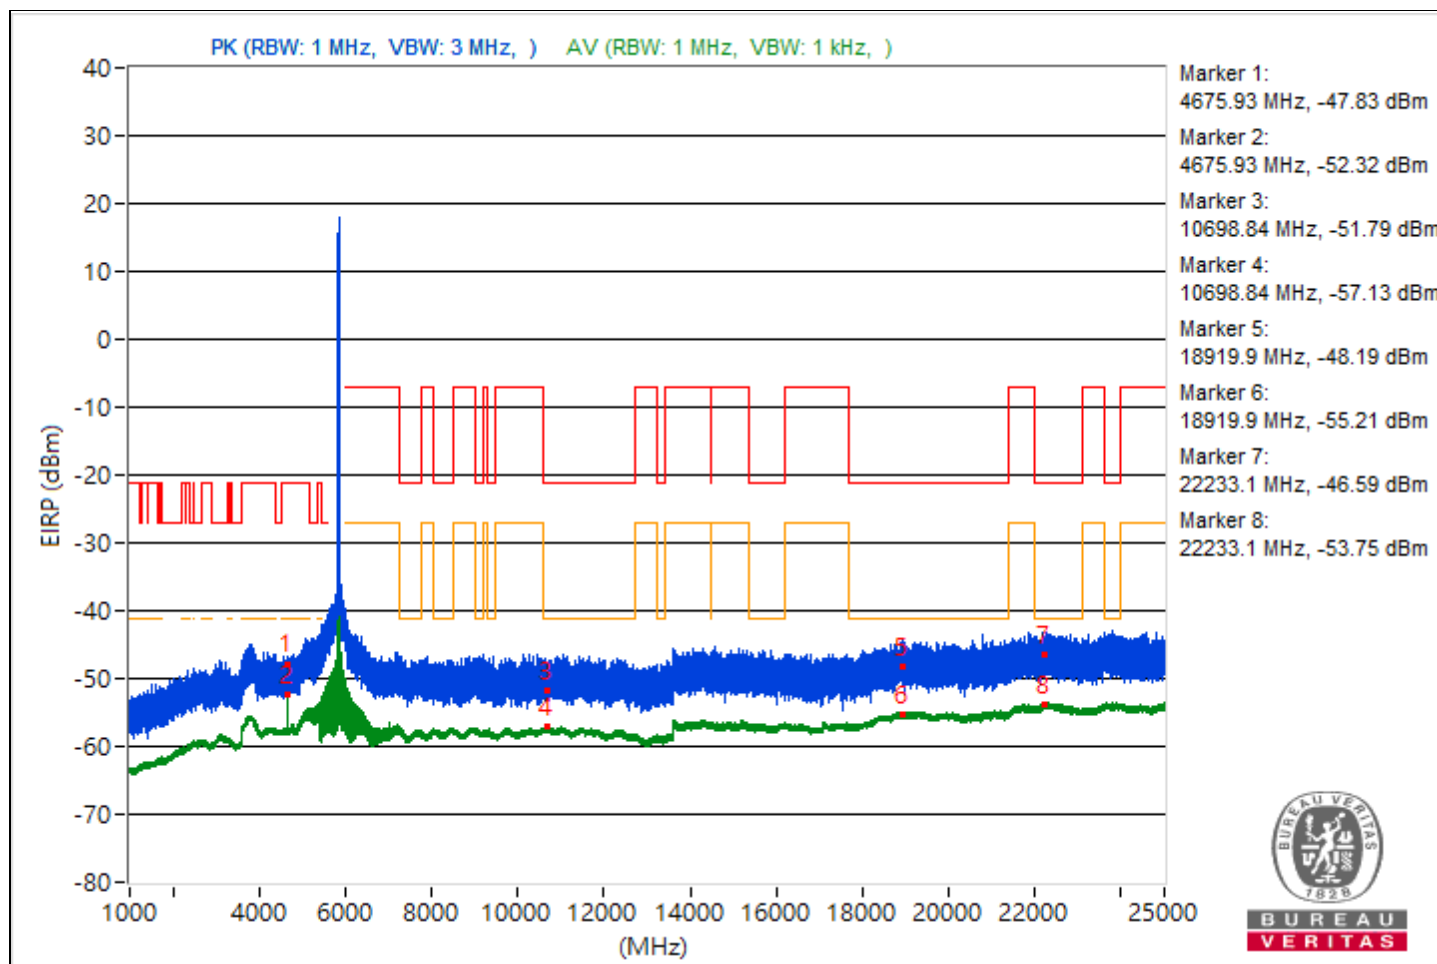


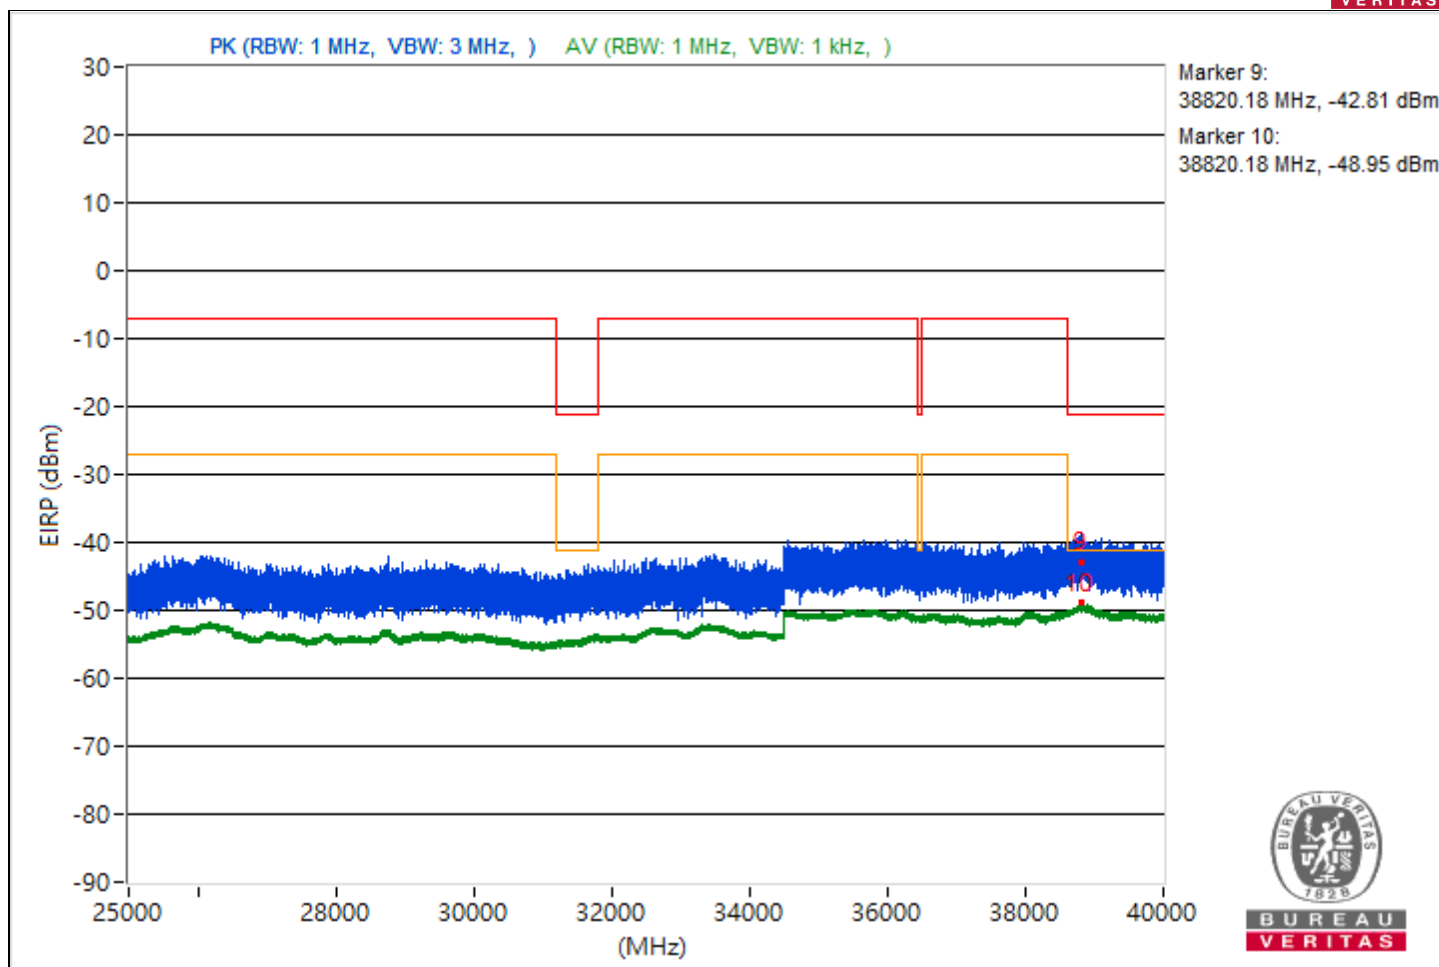


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4691.96	47.08 PK	74	-26.92	-59.25	-59.9	8.37	-48.18
2	4691.96	43.55 AV	54	-10.45	-60.75	-68.57	8.37	-51.71
3	10990.13	45.05 PK	74	-28.95	-61.15	-62.08	8.37	-50.21
4	10990.13	38.1 AV	54	-15.9	-68.77	-68.32	8.37	-57.16
5	18860.8	47.28 PK	74	-26.72	-59.93	-58.85	8.37	-47.98
6	18860.8	40.36 AV	54	-13.64	-66.44	-66.13	8.37	-54.9
7	22223.6	47.98 PK	74	-26.02	-59.2	-58.18	8.37	-47.28
8	22223.6	41.81 AV	54	-12.19	-65.01	-64.66	8.37	-53.45
9	38813.6	51.27 PK	74	-22.73	-56.9	-54.23	8.37	-43.99
10	38813.6	46.06 AV	54	-7.94	-60.85	-60.32	8.37	-49.2

Note: Margin value = Emission Level - Limit value

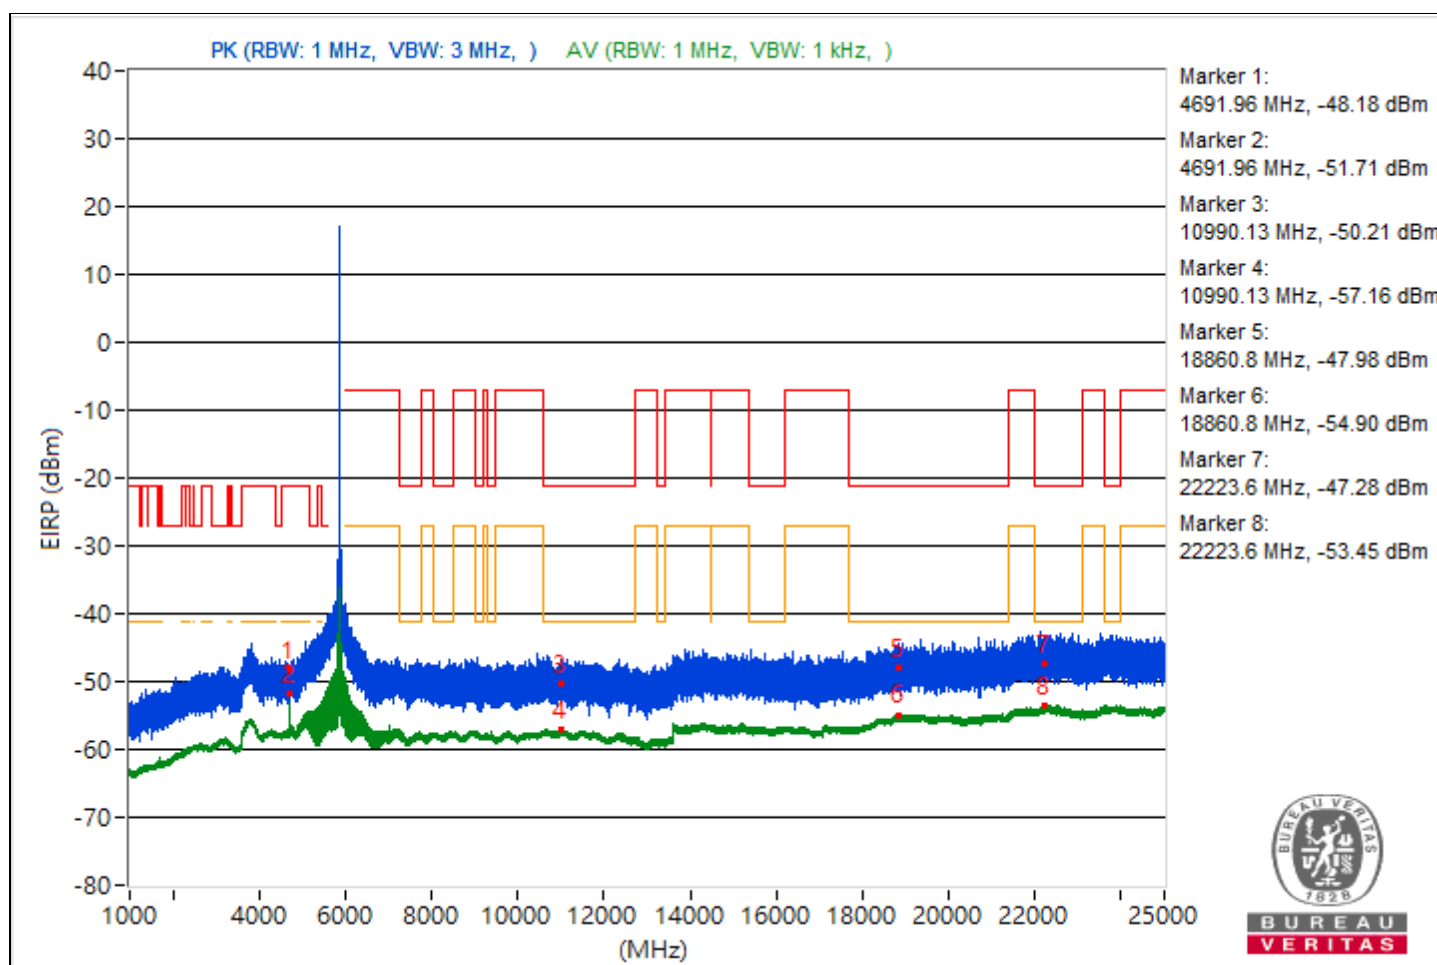


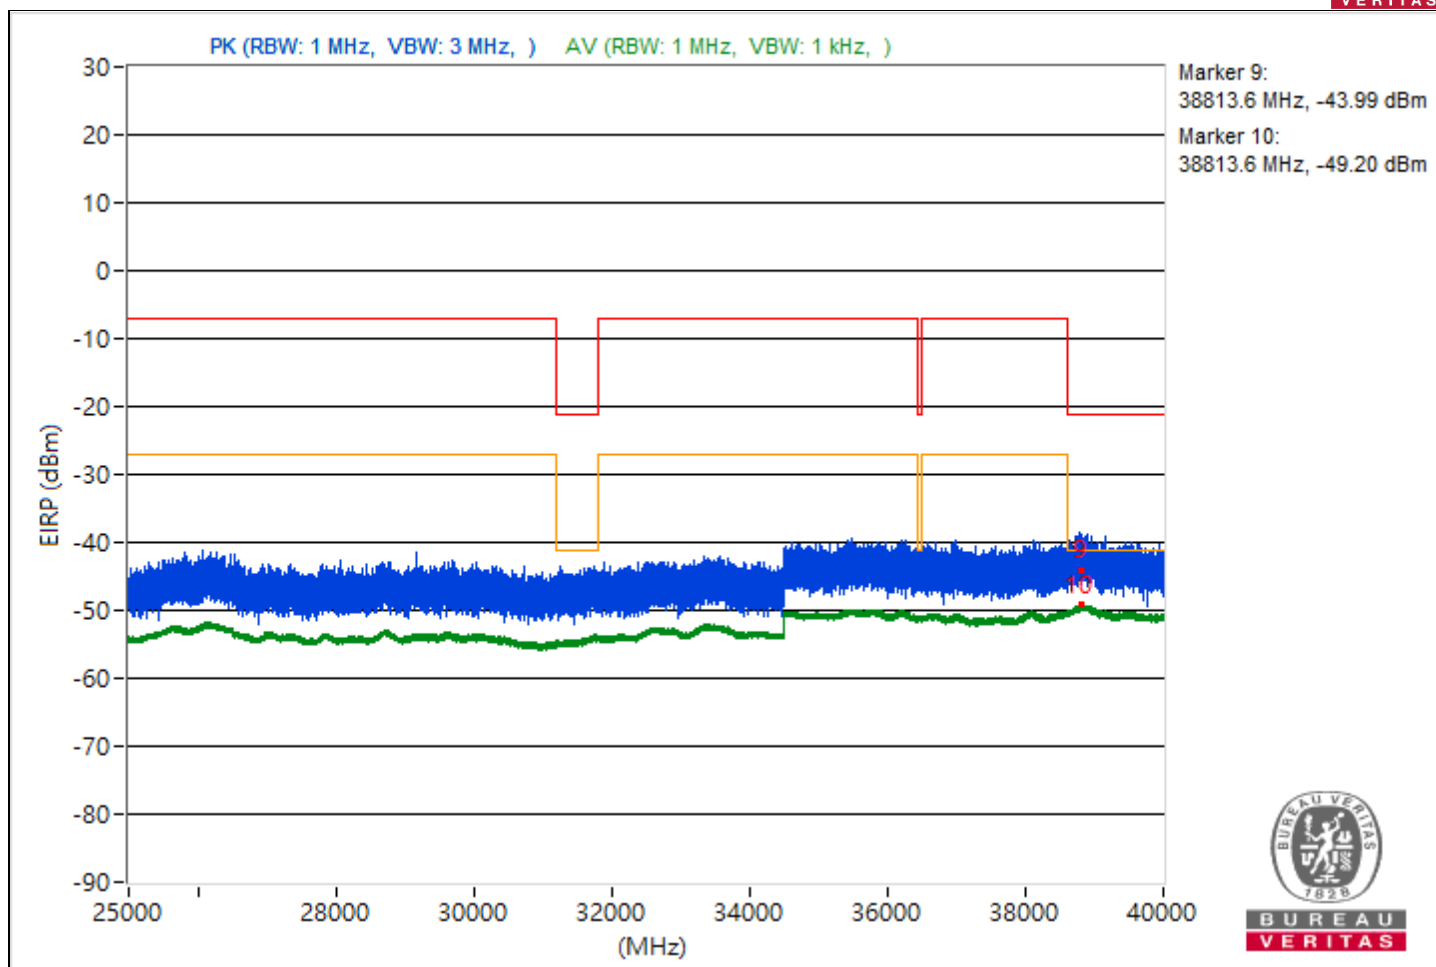


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 61% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4707.98	51.26 PK	74	-22.74	-53.7	-58.15	8.37	-44
2	4707.98	45.7 AV	54	-8.3	-58.65	-66.08	8.37	-49.56
3	8416.89	47.14 PK	74	-26.86	-61.37	-58.2	8.37	-48.12
4	8416.89	39.47 AV	54	-14.53	-66.86	-67.49	8.37	-55.79
5	19444.2	48.34 PK	74	-25.66	-59.06	-57.66	8.37	-46.92
6	19444.2	41.47 AV	54	-12.53	-65.41	-64.93	8.37	-53.79
7	23861.9	50.6 PK	74	-23.4	-56.05	-56.04	8.37	-44.66
8	23861.9	43.59 AV	54	-10.41	-62.8	-63.31	8.37	-51.67
9	39998.04	55.16 PK	74	-18.84	-52.29	-50.79	8.37	-40.1
10	39998.04	47.64 AV	54	-6.36	-59.28	-58.74	8.37	-47.62

Note: Margin value = Emission Level - Limit value

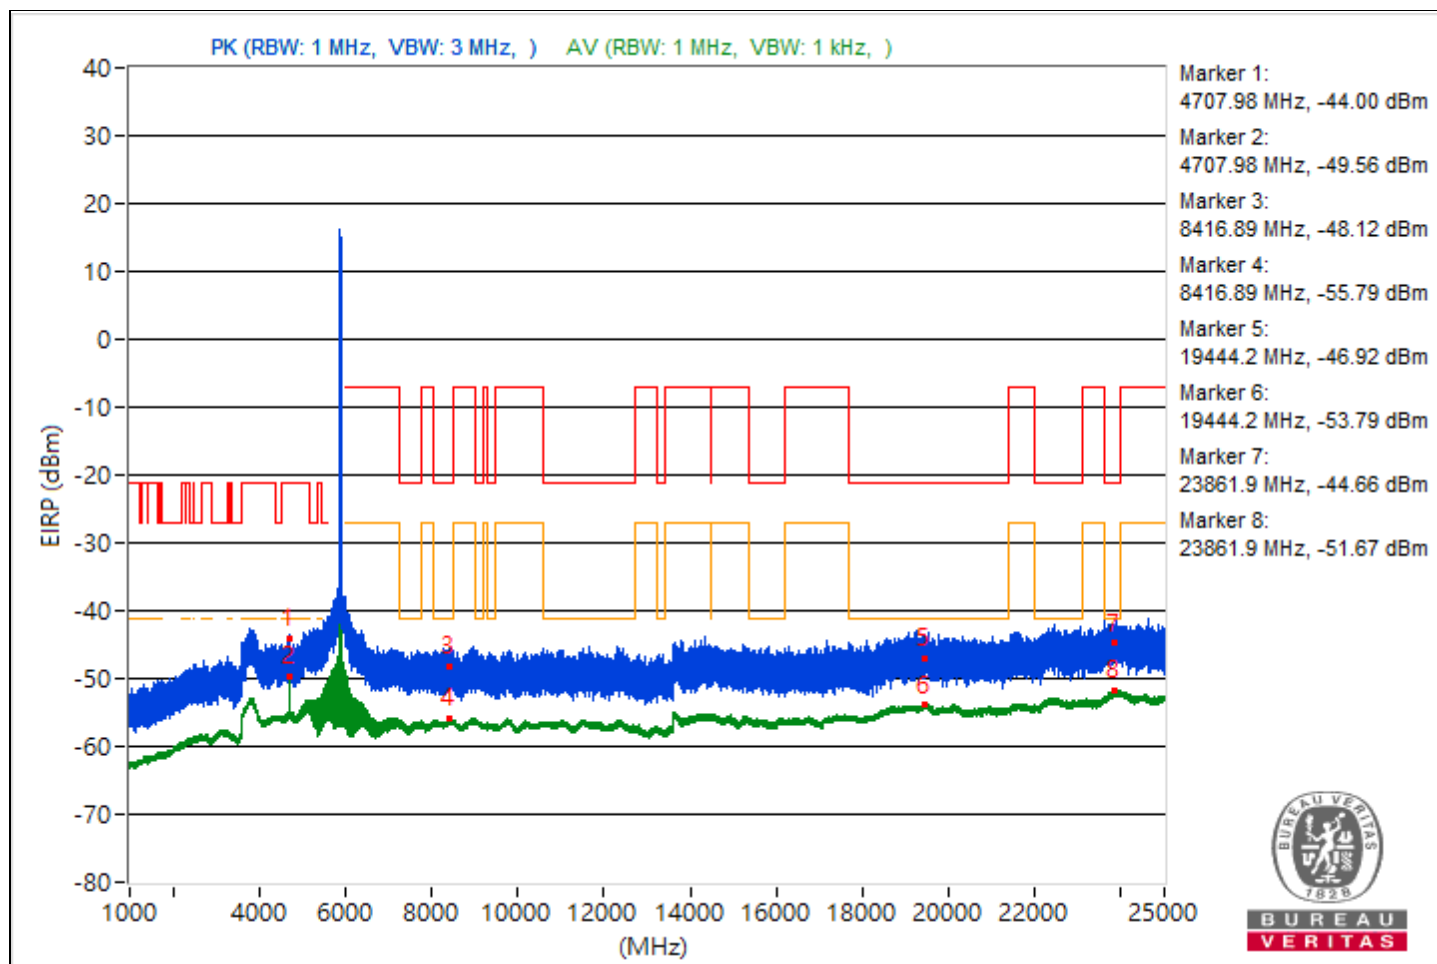


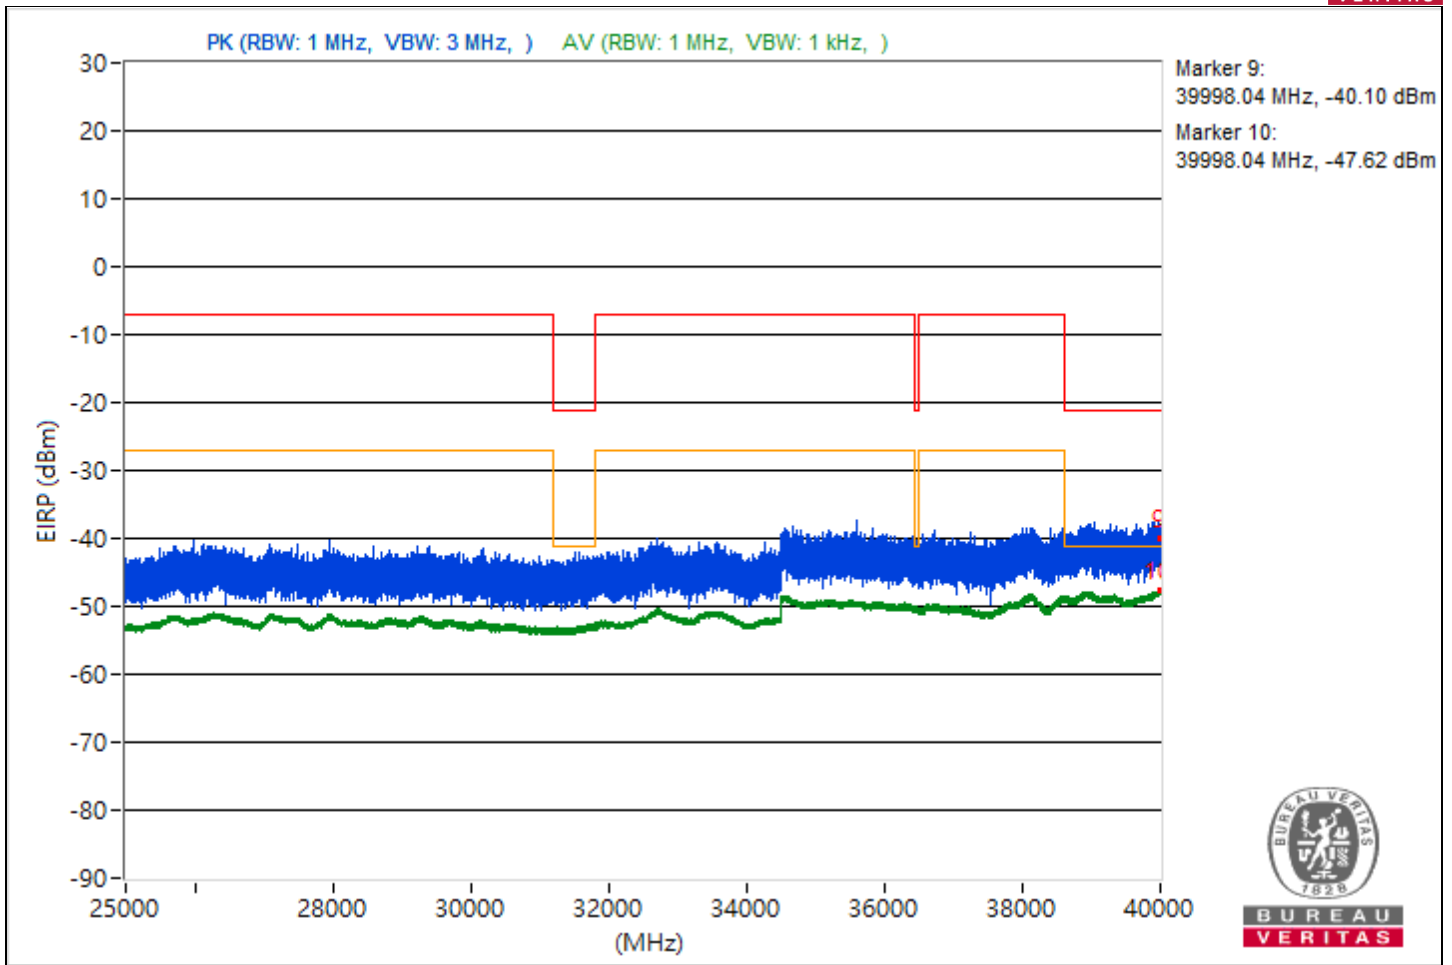


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4667.92	48.67 PK	74	-25.33	-56.91	-59.38	8.37	-46.59
2	4667.92	42.95 AV	54	-11.05	-61.38	-68.99	8.37	-52.31
3	10691.38	45.45 PK	74	-28.55	-59.93	-62.97	8.37	-49.81
4	10691.38	38.02 AV	54	-15.98	-68.91	-68.34	8.37	-57.24
5	19281.7	45.57 PK	74	-28.43	-61.72	-60.5	8.37	-49.69
6	19281.7	40.17 AV	54	-13.83	-66.19	-66.76	8.37	-55.09
7	23652.5	48.06 PK	74	-25.94	-59.26	-57.99	8.37	-47.2
8	23652.5	41.63 AV	54	-12.37	-64.69	-65.36	8.37	-53.63
9	38807.11	51.8 PK	74	-22.2	-55.78	-54.07	8.37	-43.46
10	38807.11	46.07 AV	54	-7.93	-60.83	-60.32	8.37	-49.19

Note: Margin value = Emission Level - Limit value

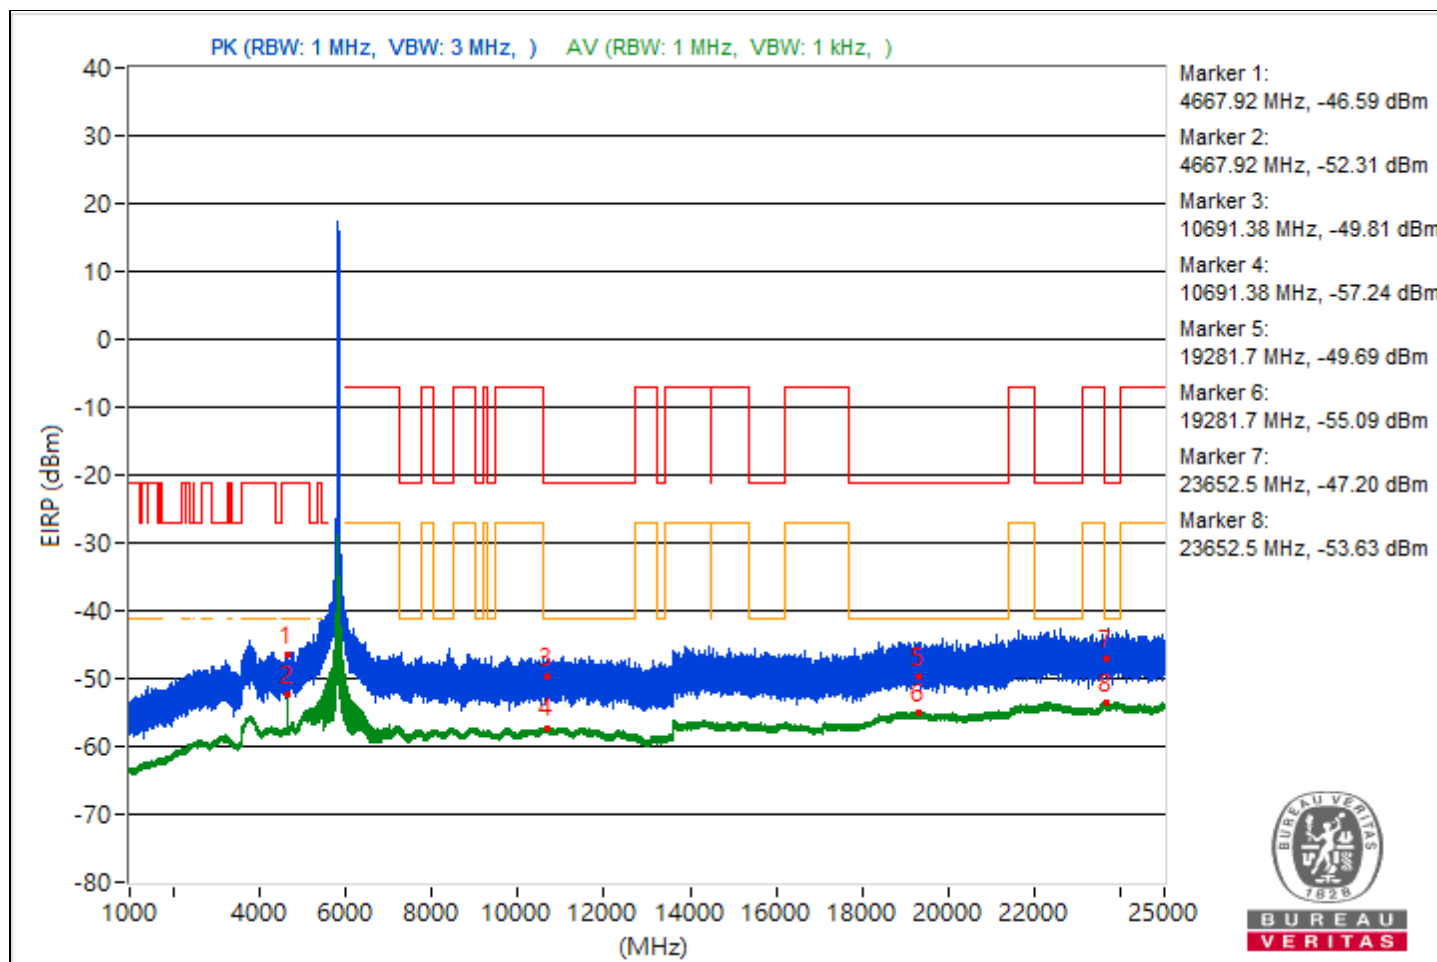


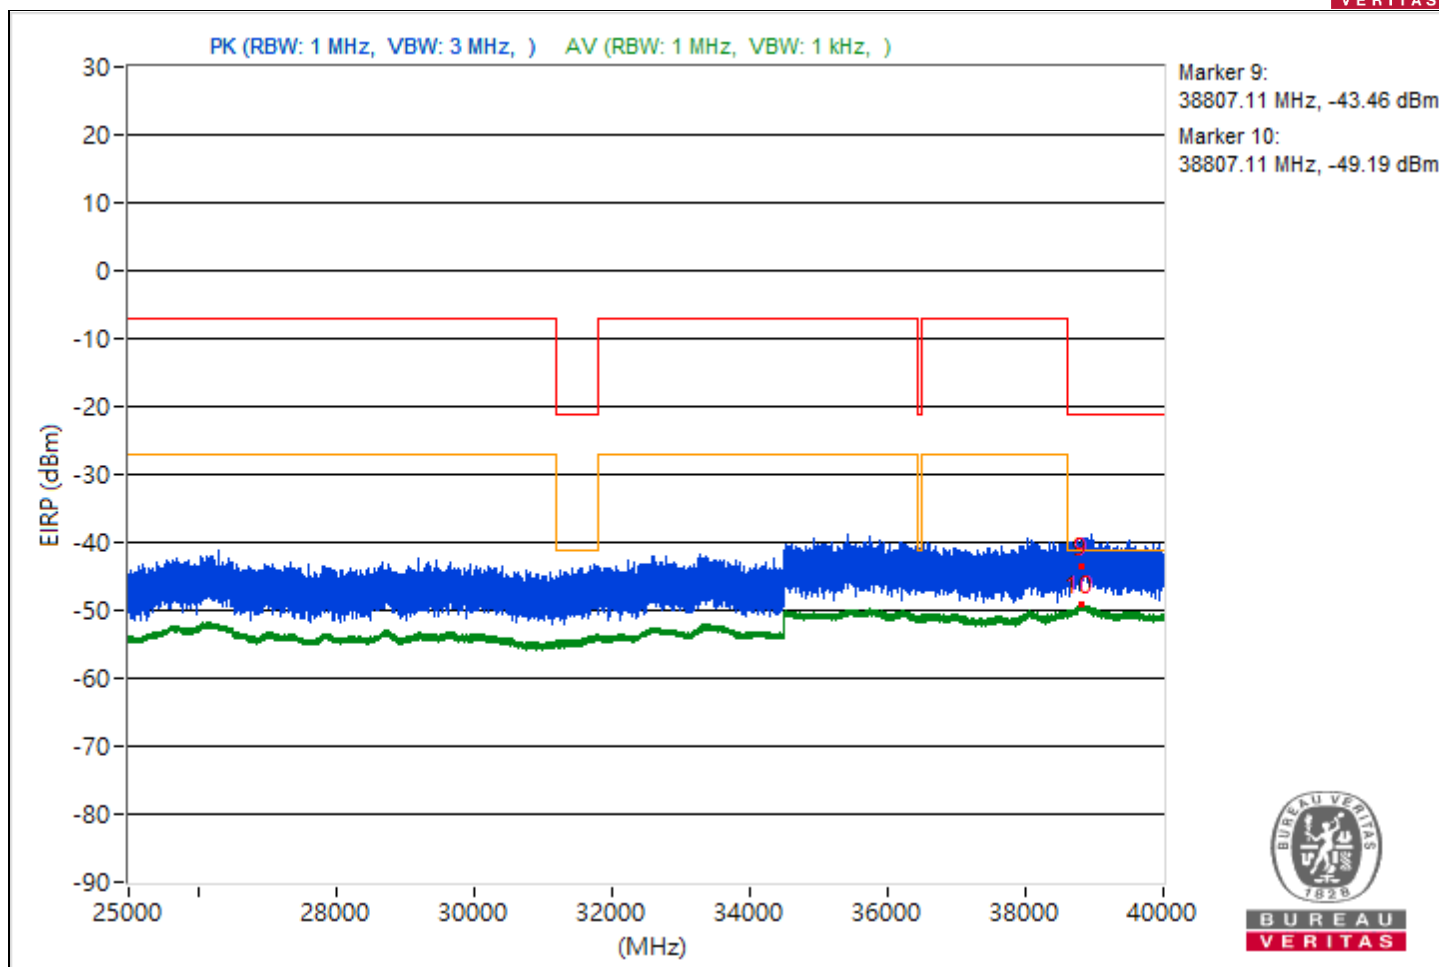


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4699.89	47.95 PK	74	-26.05	-57.87	-59.7	8.37	-47.31
2	4699.89	43.42 AV	54	-10.58	-60.85	-68.82	8.37	-51.84
3	11752.18	45.83 PK	74	-28.17	-61.63	-60.12	8.37	-49.43
4	11752.18	38.09 AV	54	-15.91	-68.84	-68.27	8.37	-57.17
5	18850.9	47.28 PK	74	-26.72	-59.64	-59.1	8.37	-47.98
6	18850.9	40.24 AV	54	-13.76	-66.15	-66.66	8.37	-55.02
7	23788	47.82 PK	74	-26.18	-58.76	-58.87	8.37	-47.44
8	23788	41.52 AV	54	-12.48	-65.63	-64.66	8.37	-53.74
9	38833.24	51.85 PK	74	-22.15	-53.93	-55.87	8.37	-43.41
10	38833.24	46.01 AV	54	-7.99	-60.44	-60.83	8.37	-49.25

Note: Margin value = Emission Level - Limit value

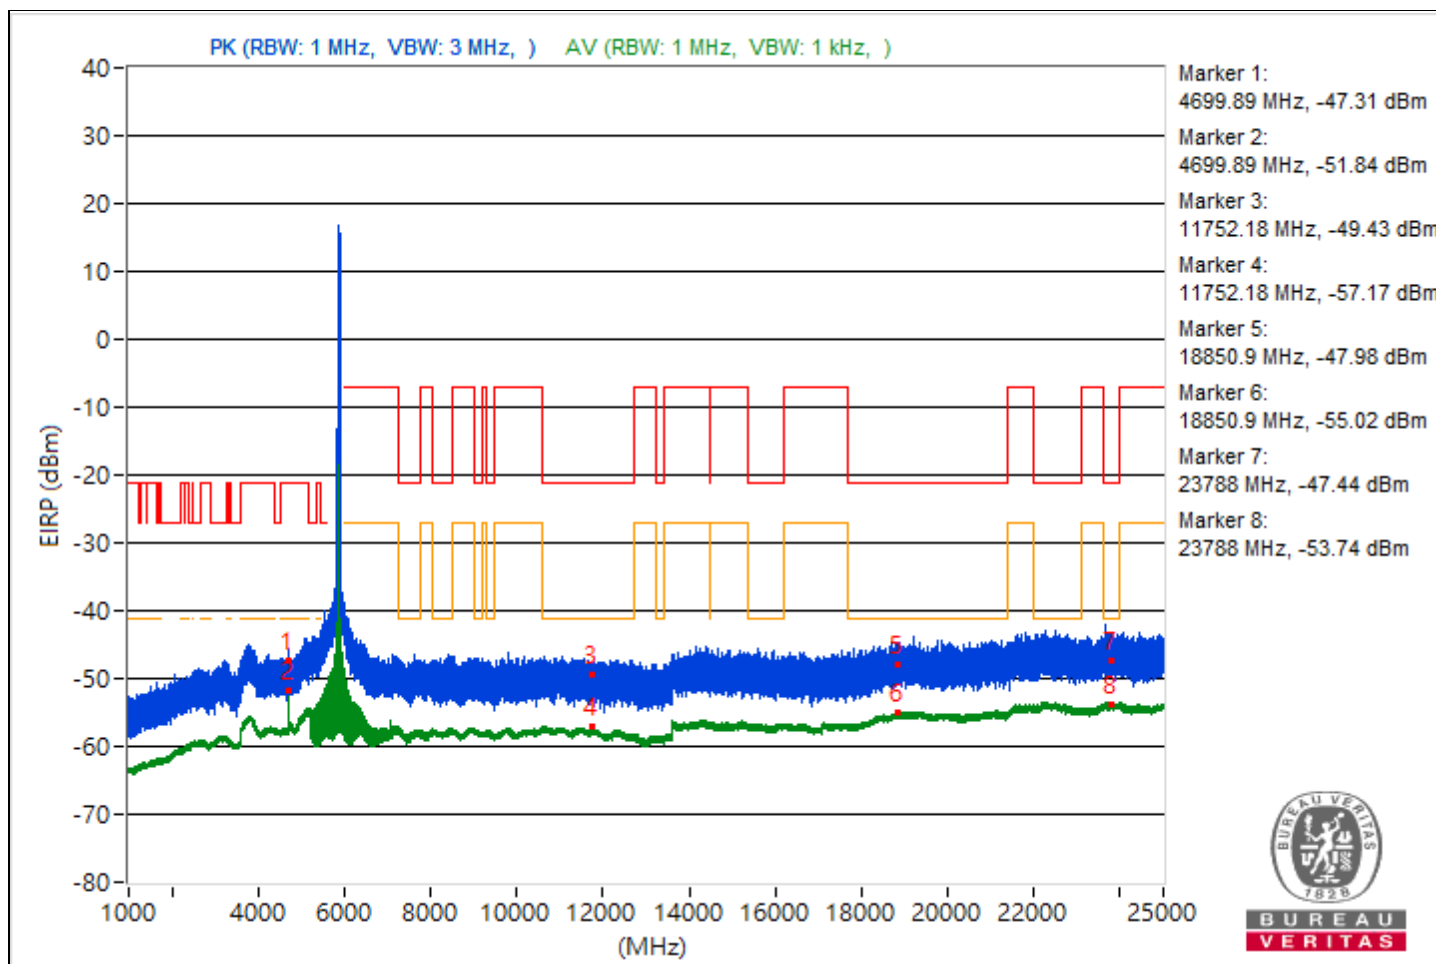


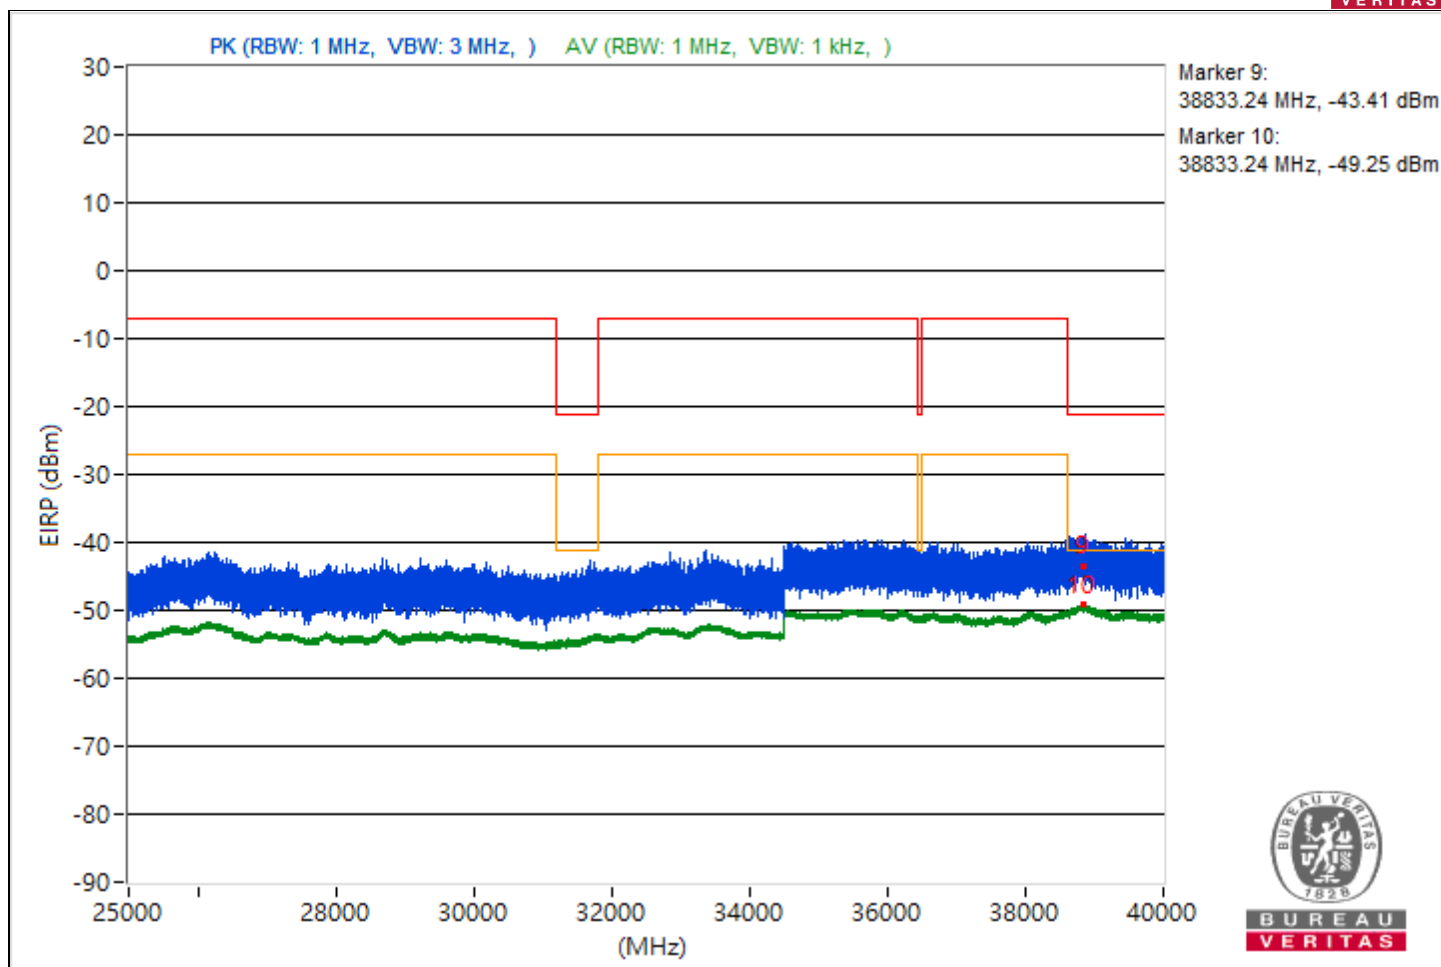


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.56	50.44 PK	74	-23.56	-57.32	-55.31	8.37	-44.82
2	5453.56	42.11 AV	54	-11.89	-65.07	-64.05	8.37	-53.15
3	7263.21	45.19 PK	74	-28.81	-61.42	-61.48	8.37	-50.07
4	7263.21	38.08 AV	54	-15.92	-68.83	-68.3	8.37	-57.18
5	18854.8	46.97 PK	74	-27.03	-59.51	-59.84	8.37	-48.29
6	18854.8	40.19 AV	54	-13.81	-66.15	-66.78	8.37	-55.07
7	23842.4	48.78 PK	74	-25.22	-59.44	-56.71	8.37	-46.48
8	23842.4	41.76 AV	54	-12.24	-64.75	-65.02	8.37	-53.5
9	38861.33	55.72 PK	74	-18.28	-51.57	-50.36	8.37	-39.54
10	38861.33	46.02 AV	54	-7.98	-61.02	-60.25	8.37	-49.24

Note: Margin value = Emission Level - Limit value

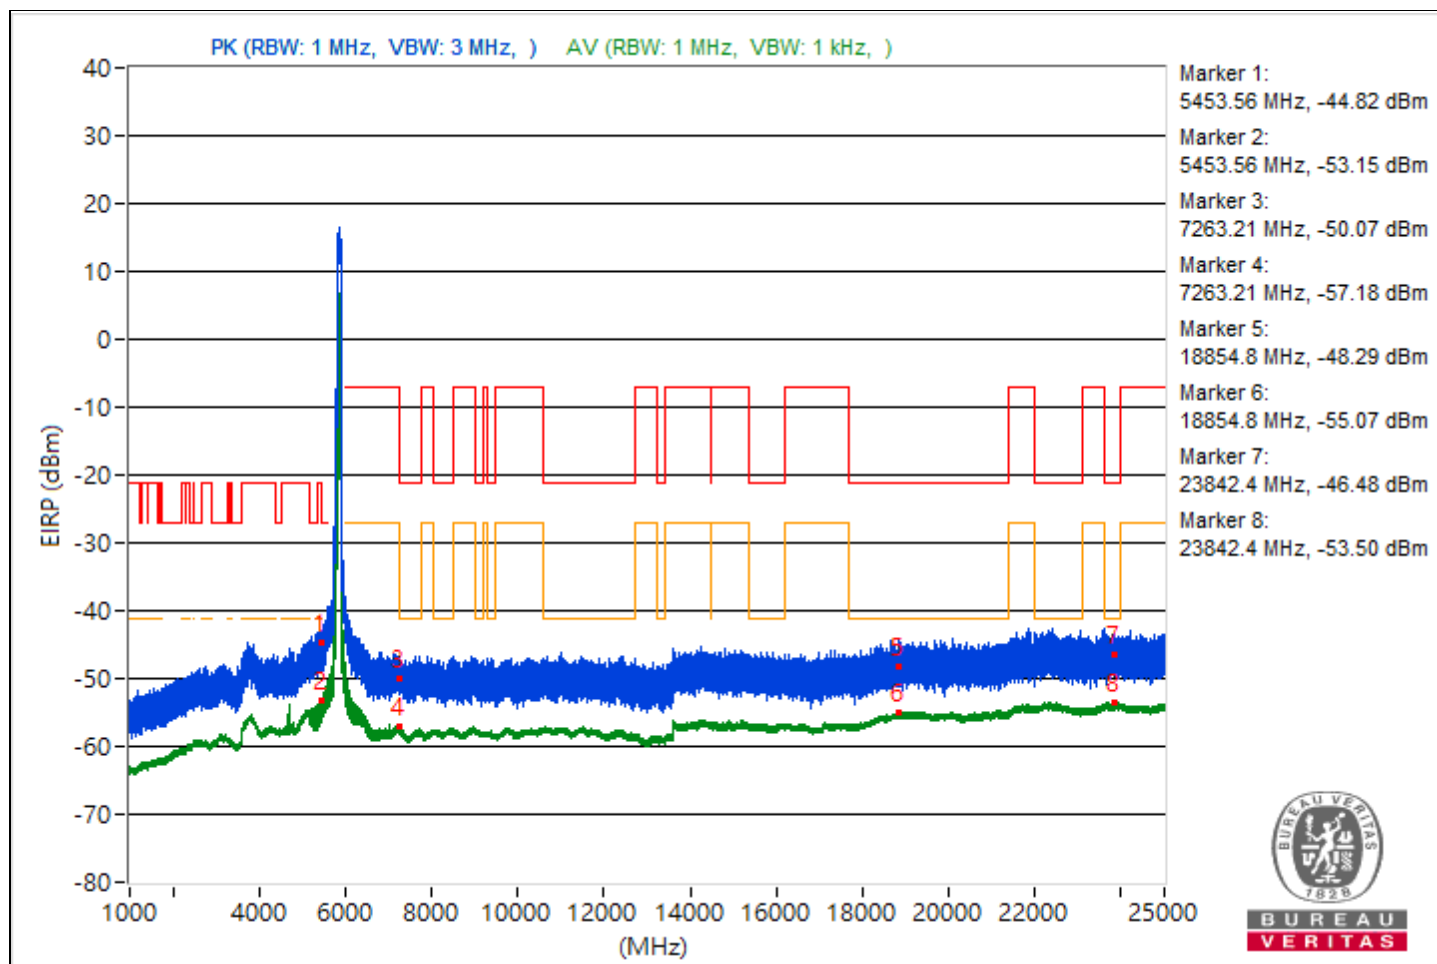


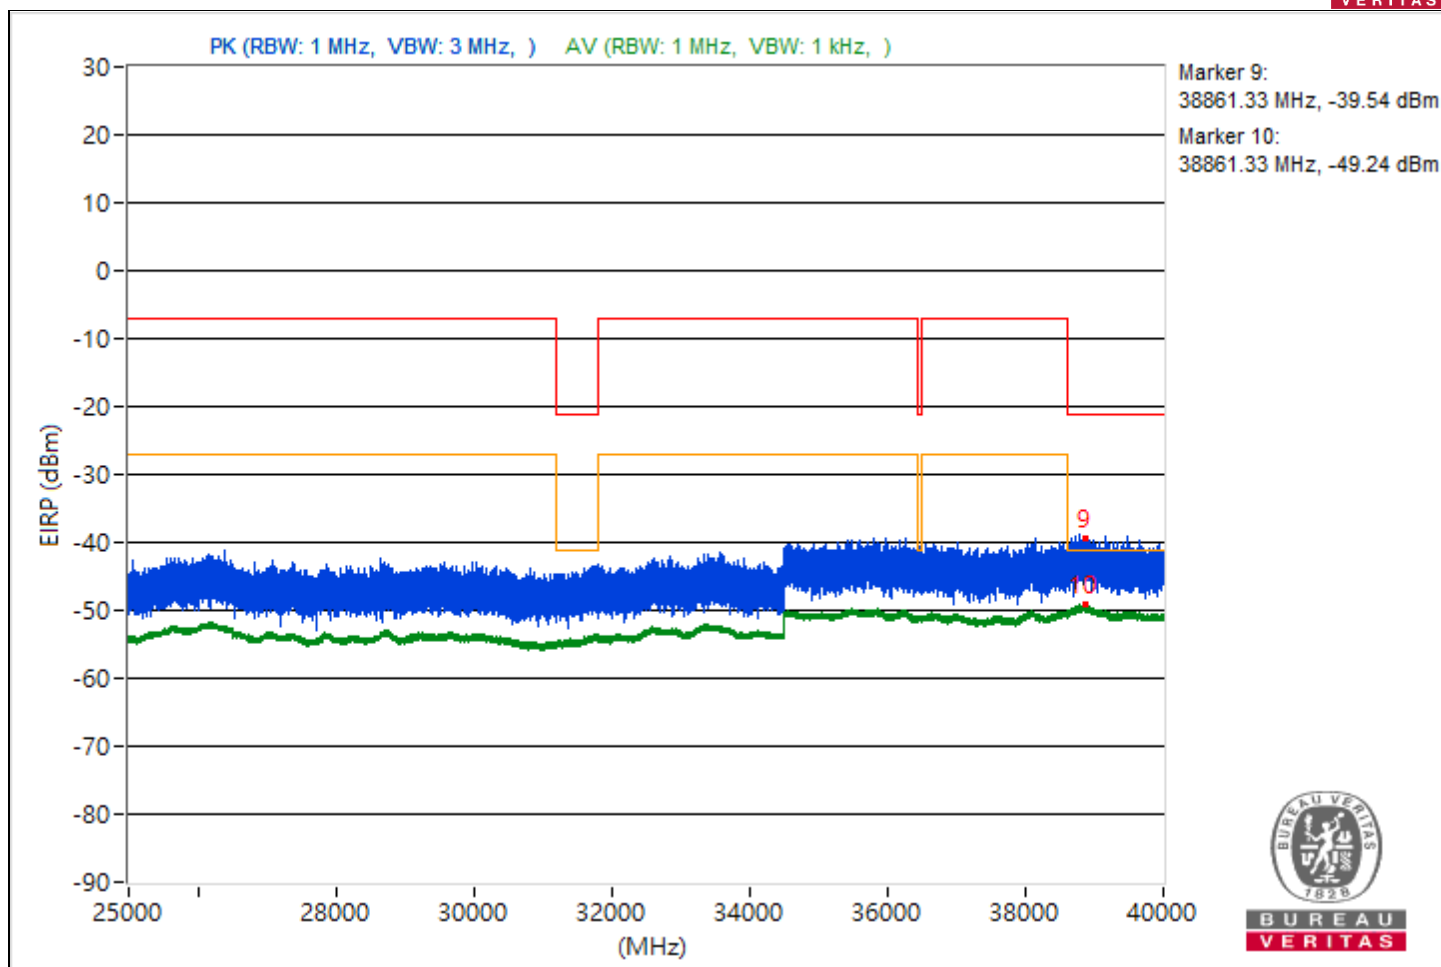


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5452.39	49.65 PK	74	-24.35	-57.23	-56.76	8.37	-45.61
2	5452.39	43.14 AV	54	-10.86	-64.05	-63.01	8.37	-52.12
3	11554.31	45.25 PK	74	-28.75	-61.05	-61.75	8.37	-50.01
4	11554.31	37.97 AV	54	-16.03	-68.26	-69.12	8.37	-57.29
5	19325.2	45.23 PK	74	-28.77	-61.75	-61.1	8.37	-50.03
6	19325.2	40.25 AV	54	-13.75	-66.03	-66.77	8.37	-55.01
7	22275.7	49.25 PK	74	-24.75	-57.98	-56.87	8.37	-46.01
8	22275.7	41.65 AV	54	-12.35	-64.74	-65.27	8.37	-53.61
9	38838.76	51.53 PK	74	-22.47	-56.97	-53.81	8.37	-43.73
10	38838.76	45.94 AV	54	-8.06	-61.01	-60.42	8.37	-49.32

Note: Margin value = Emission Level - Limit value

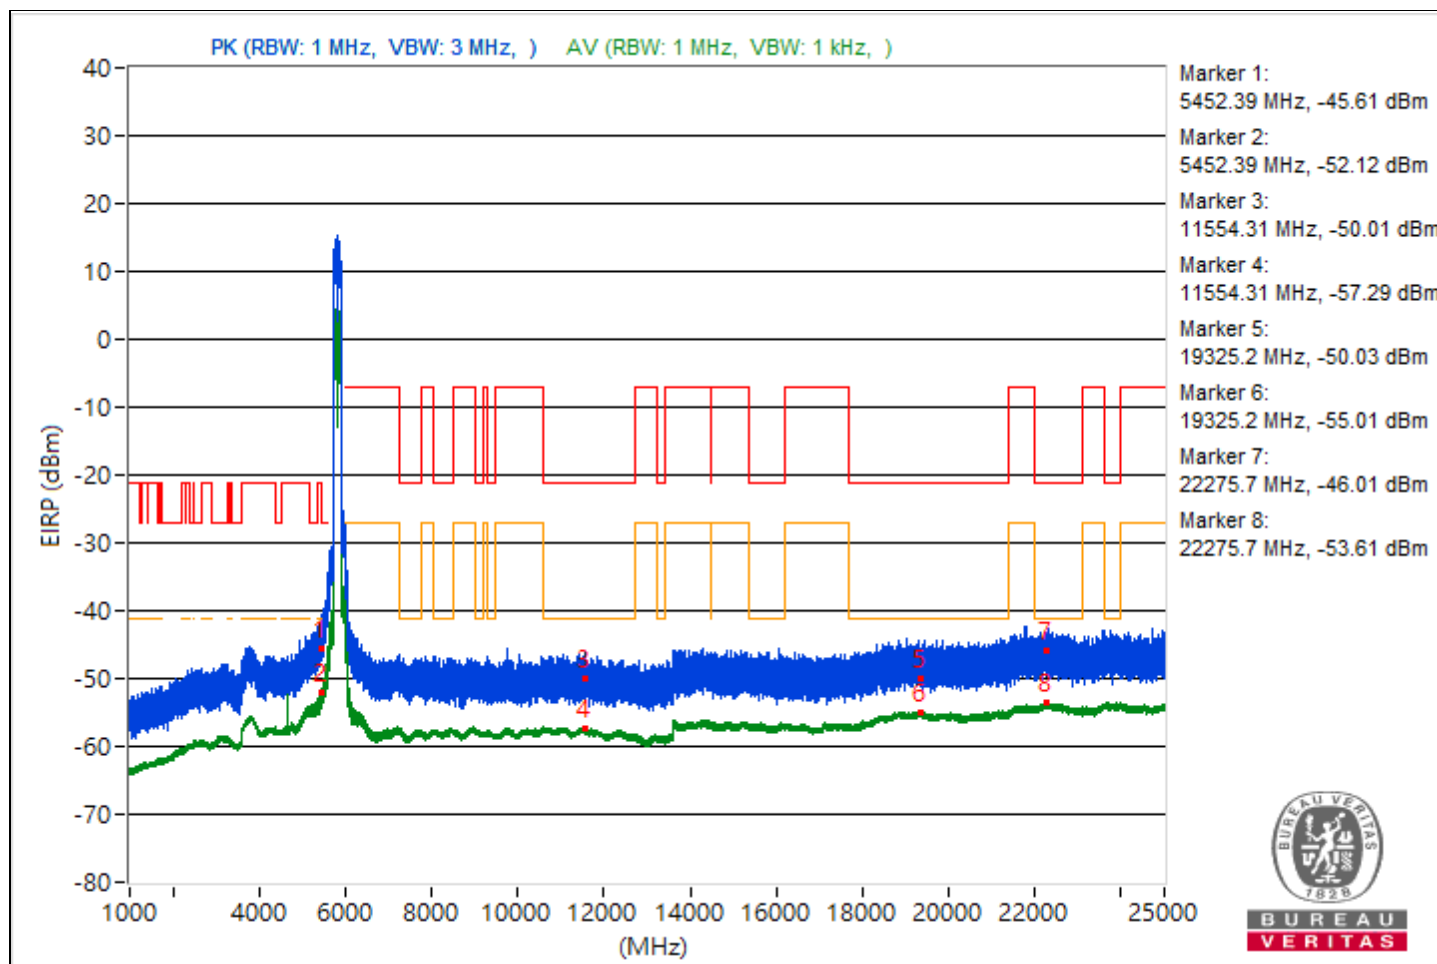


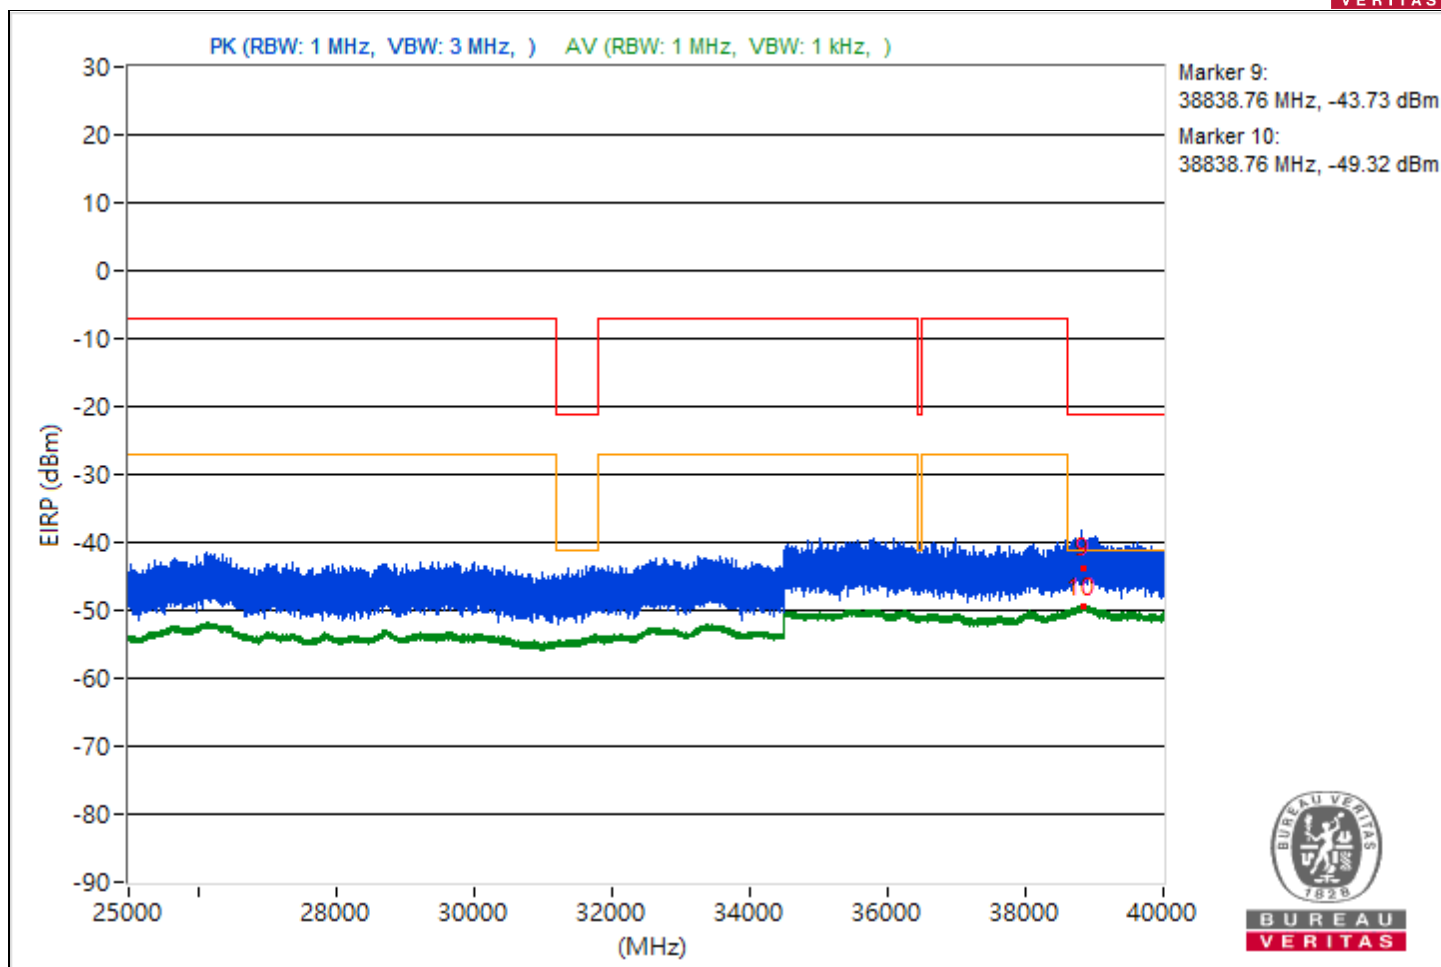


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3775.34	46.69 PK	74	-27.31	-60.23	-59.69	8.37	-48.57
2	3775.34	40.16 AV	54	-13.84	-66.71	-66.27	8.37	-55.1
3	10999.29	45.19 PK	74	-28.81	-62.08	-60.9	8.37	-50.07
4	10999.29	38.39 AV	54	-15.61	-68.53	-67.99	8.37	-56.87
5	19423.7	47.46 PK	74	-26.54	-58.59	-59.85	8.37	-47.8
6	19423.7	40.49 AV	54	-13.51	-66.66	-65.7	8.37	-54.77
7	22293.5	49.84 PK	74	-24.16	-56.62	-56.98	8.37	-45.42
8	22293.5	42.1 AV	54	-11.9	-64.86	-64.24	8.37	-53.16
9	38770.4	51.09 PK	74	-22.91	-56.1	-55.07	8.37	-44.17
10	38770.4	46.24 AV	54	-7.76	-60.64	-60.16	8.37	-49.02

Note: Margin value = Emission Level - Limit value

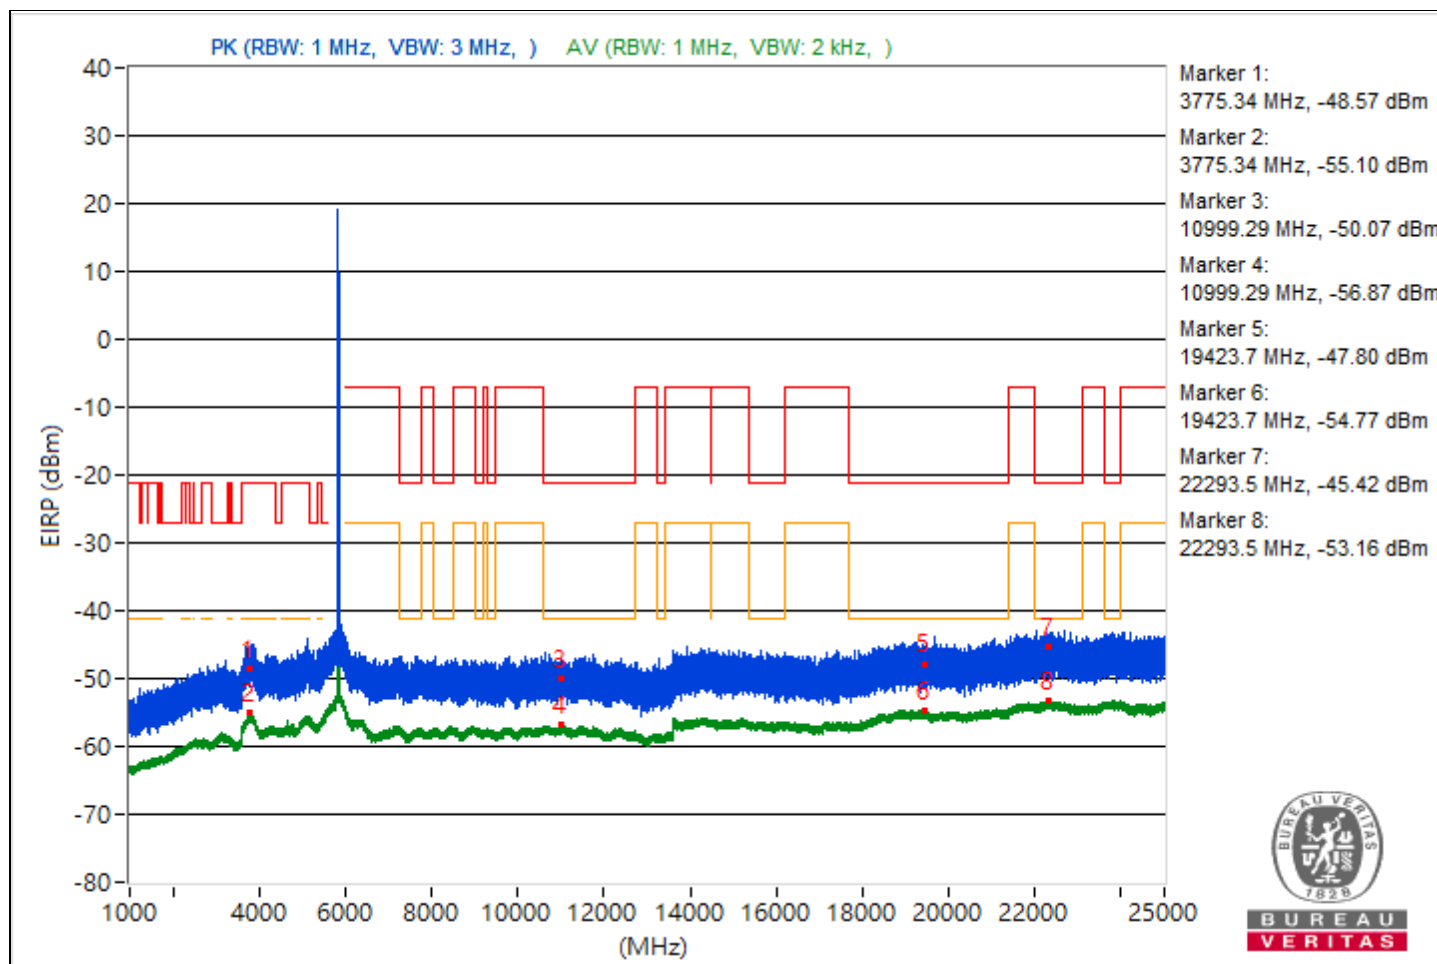


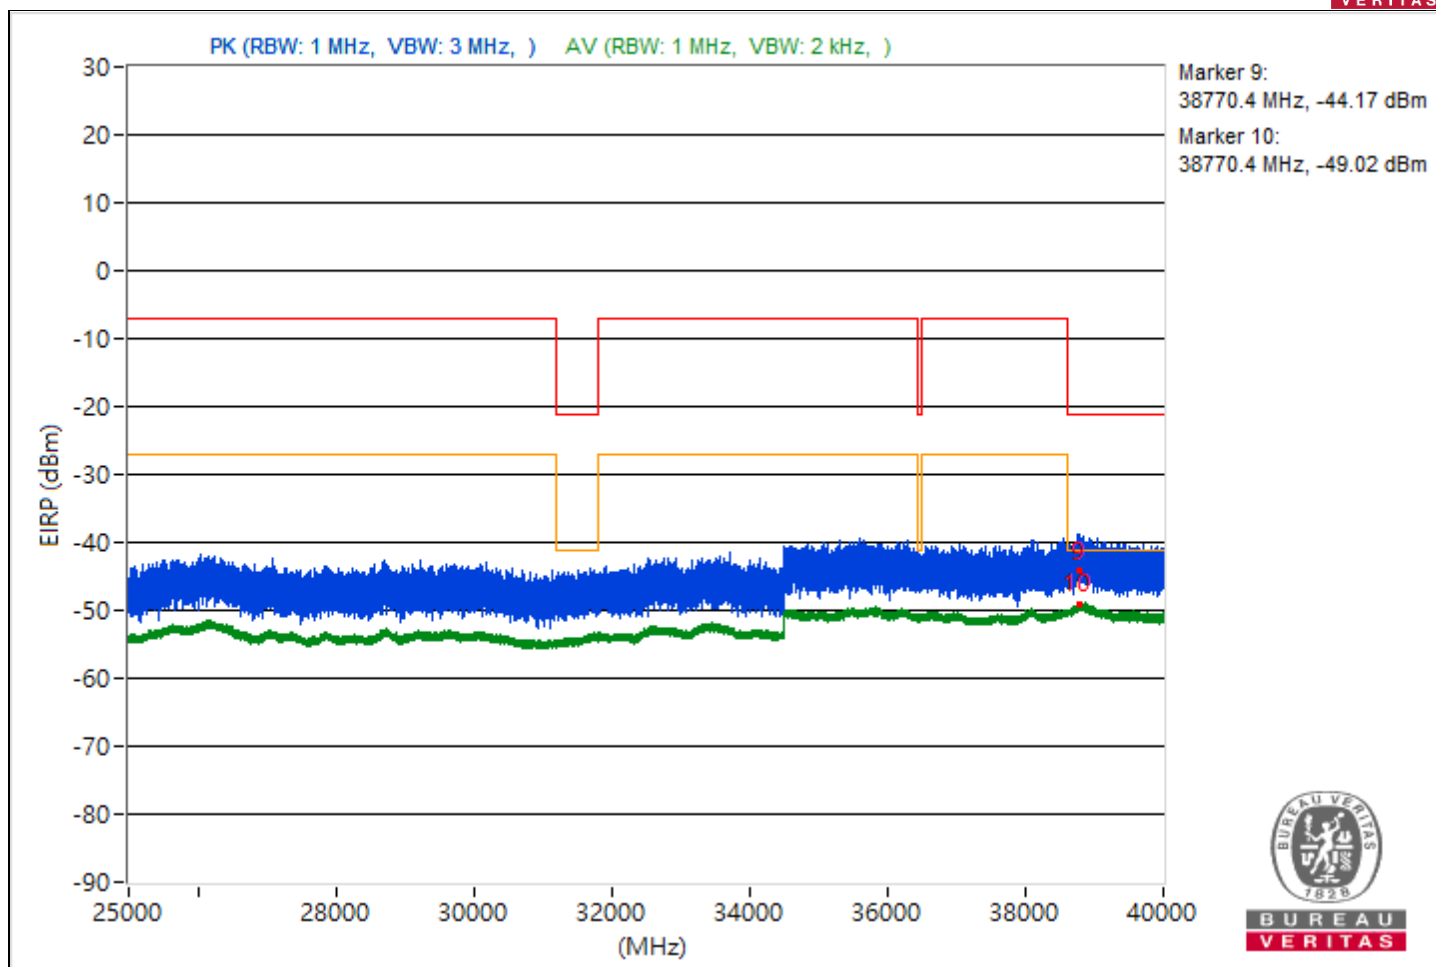


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.6	47.1 PK	74	-26.9	-60.63	-58.66	8.37	-48.16
2	3805.6	39.82 AV	54	-14.18	-67.2	-66.48	8.37	-55.44
3	11500.36	44.13 PK	74	-29.87	-62.45	-62.58	8.37	-51.13
4	11500.36	38.25 AV	54	-15.75	-67.76	-69.14	8.37	-57.01
5	19308.8	47.1 PK	74	-26.9	-59.1	-60.03	8.37	-48.16
6	19308.8	40.2 AV	54	-13.8	-65.66	-67.38	8.37	-55.06
7	23788.4	51.95 PK	74	-22.05	-56.88	-53.25	8.37	-43.31
8	23788.4	42.14 AV	54	-11.86	-64.34	-64.67	8.37	-53.12
9	38864.53	51.69 PK	74	-22.31	-55.73	-54.29	8.37	-43.57
10	38864.53	46.33 AV	54	-7.67	-59.84	-60.84	8.37	-48.93

Note: Margin value = Emission Level - Limit value

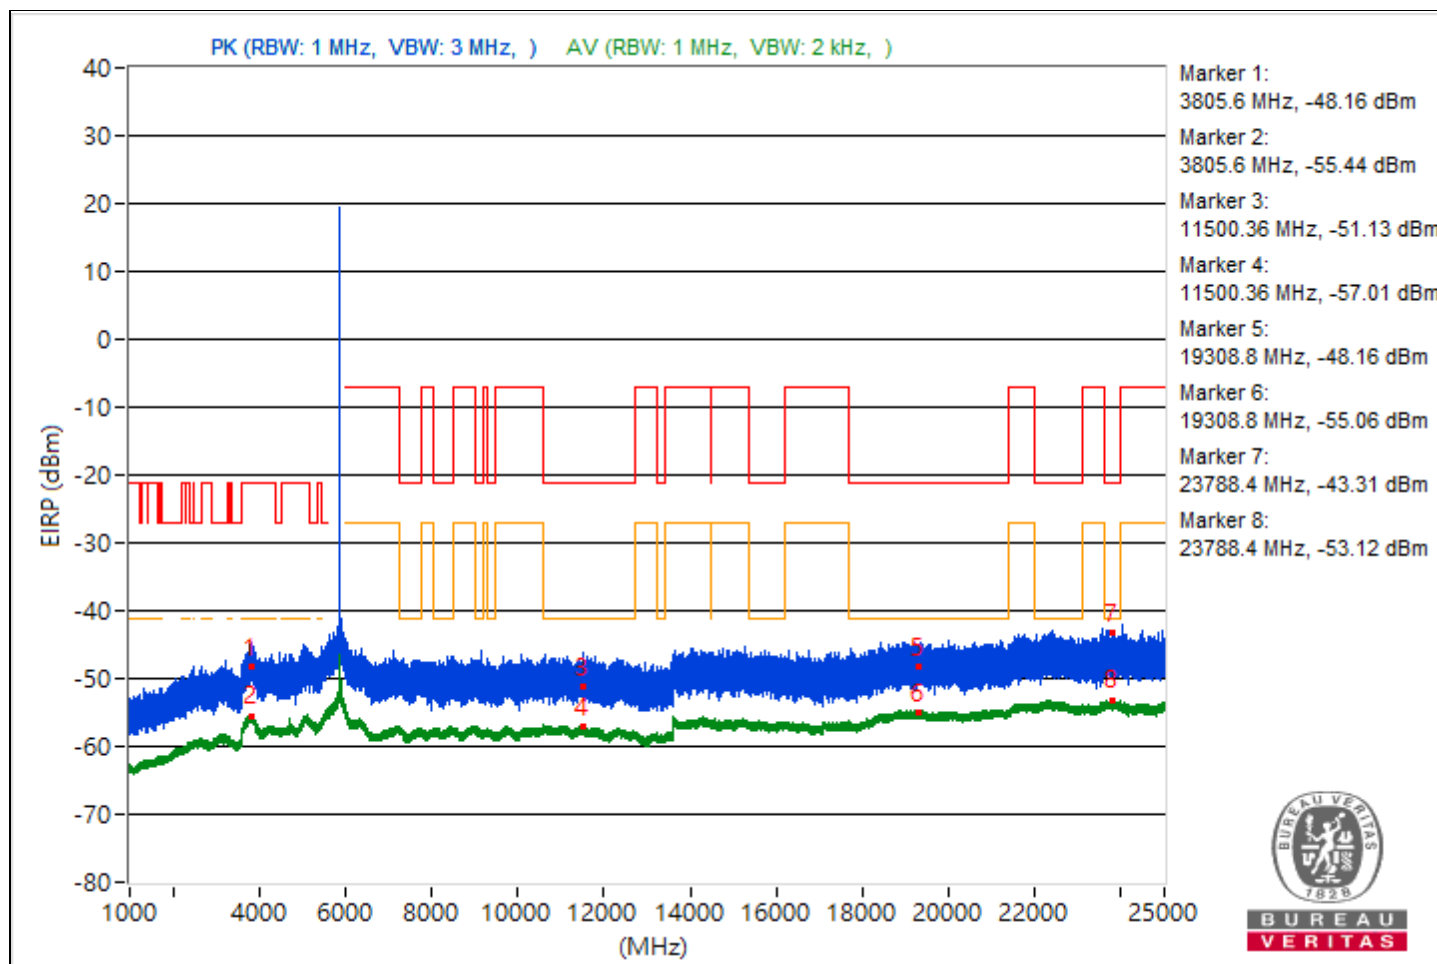


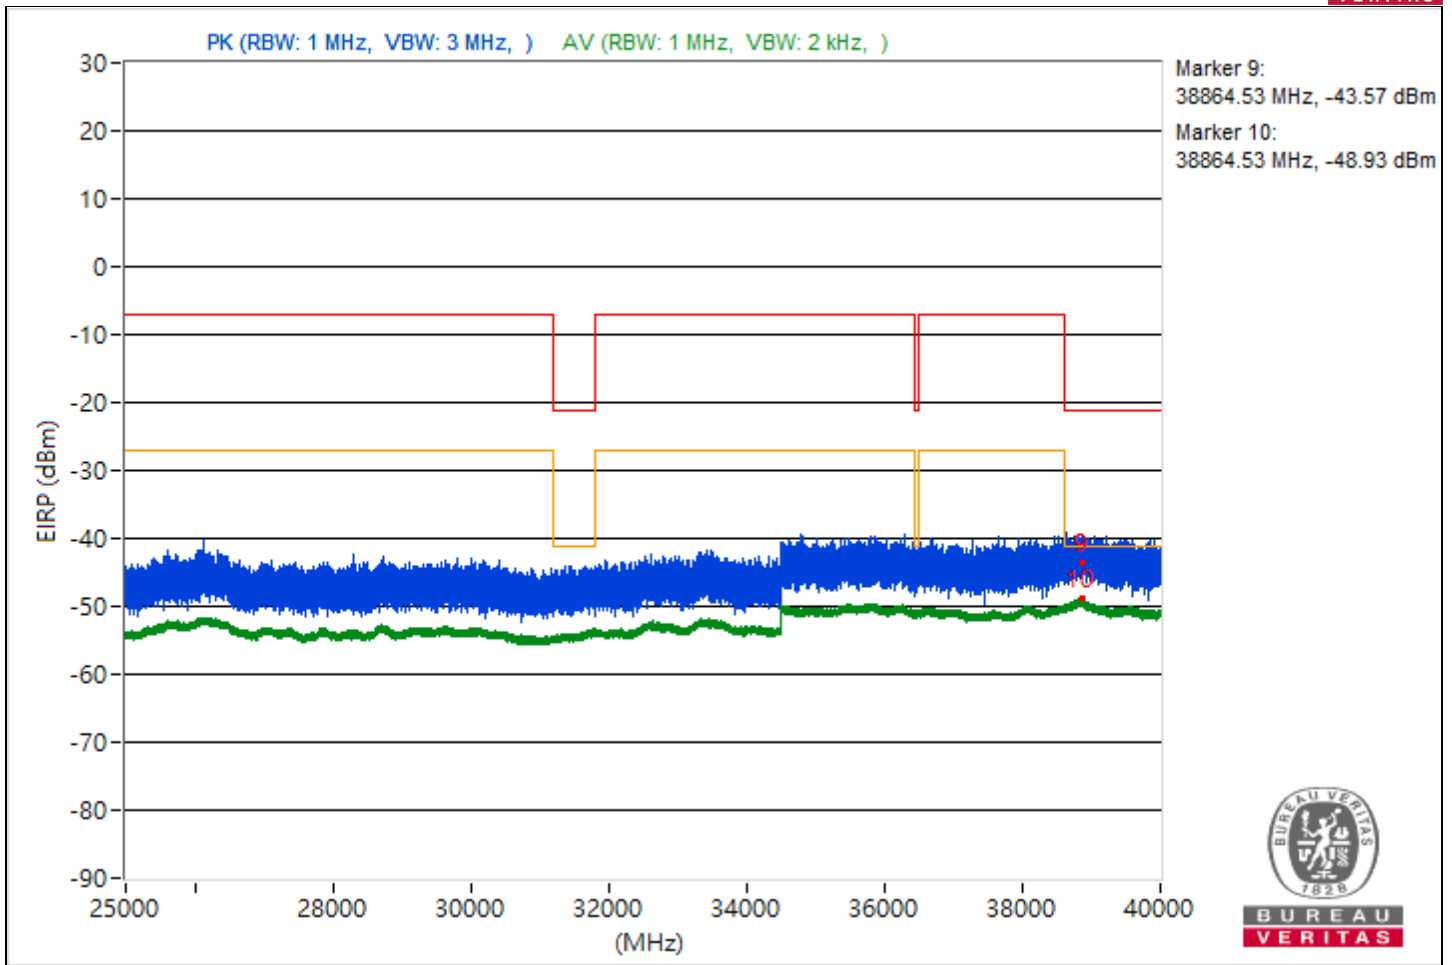


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.19	47.69 PK	74	-26.31	-59.43	-58.51	8.37	-47.57
2	3817.19	41.13 AV	54	-12.87	-65.7	-65.32	8.37	-54.13
3	9028.71	47.56 PK	74	-26.44	-58.71	-59.49	8.37	-47.7
4	9028.71	39.09 AV	54	-14.91	-68.13	-67.03	8.37	-56.17
5	19423.2	47.25 PK	74	-26.75	-59.39	-59.4	8.37	-48.01
6	19423.2	41.9 AV	54	-12.1	-64.96	-64.53	8.37	-53.36
7	23825.4	50.34 PK	74	-23.66	-55.96	-56.67	8.37	-44.92
8	23825.4	43.49 AV	54	-10.51	-62.7	-63.66	8.37	-51.77
9	38779.73	53.36 PK	74	-20.64	-53.35	-53.2	8.37	-41.9
10	38779.73	48.3 AV	54	-5.7	-58.08	-58.63	8.37	-46.96

Note: Margin value = Emission Level - Limit value

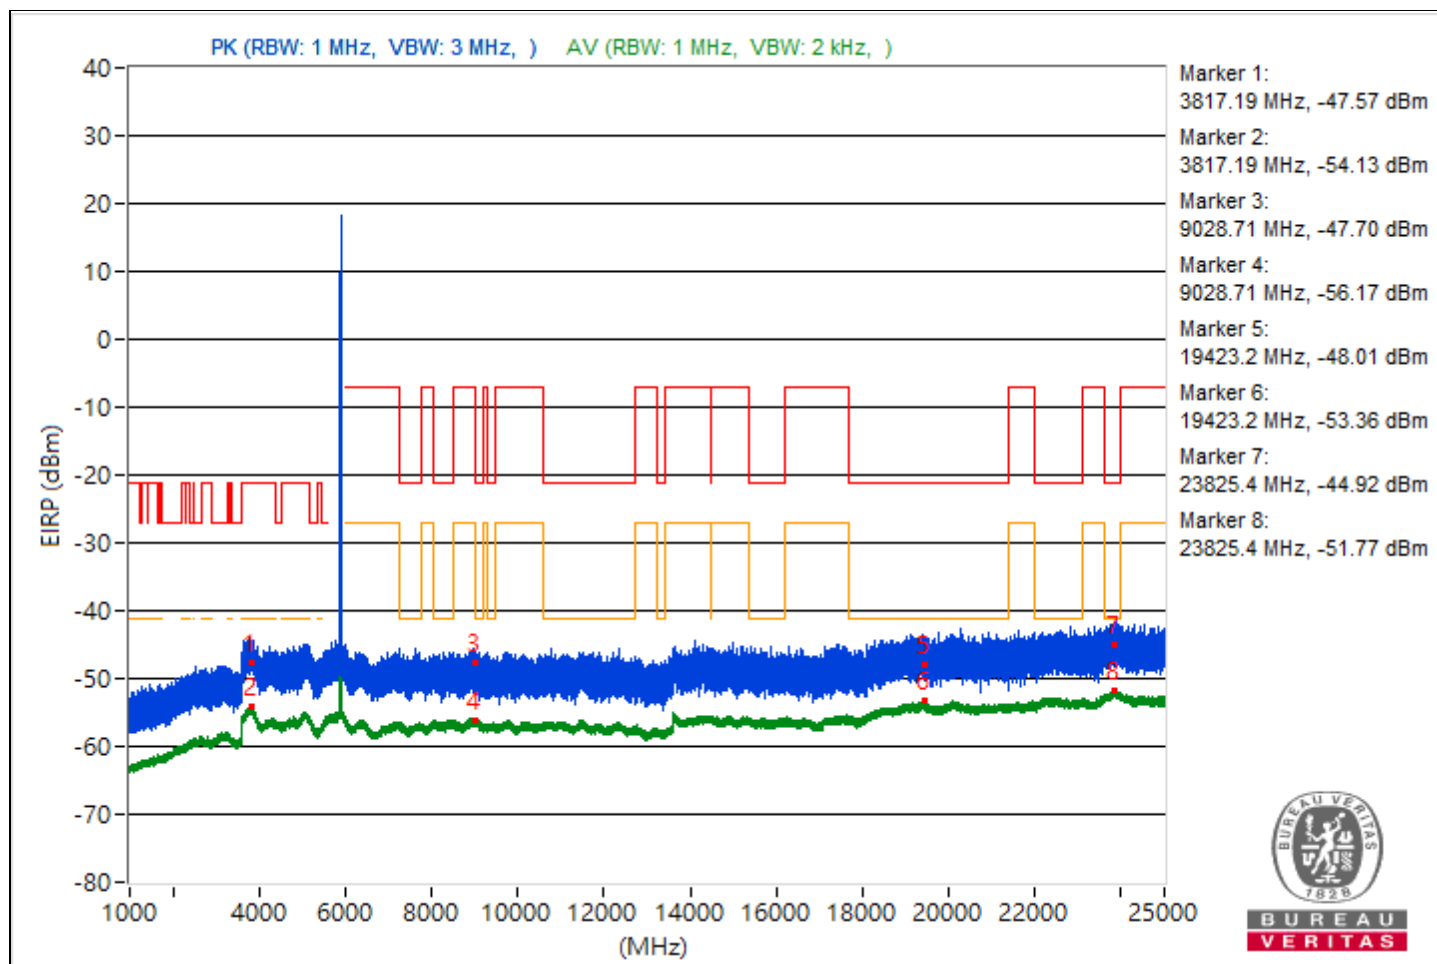


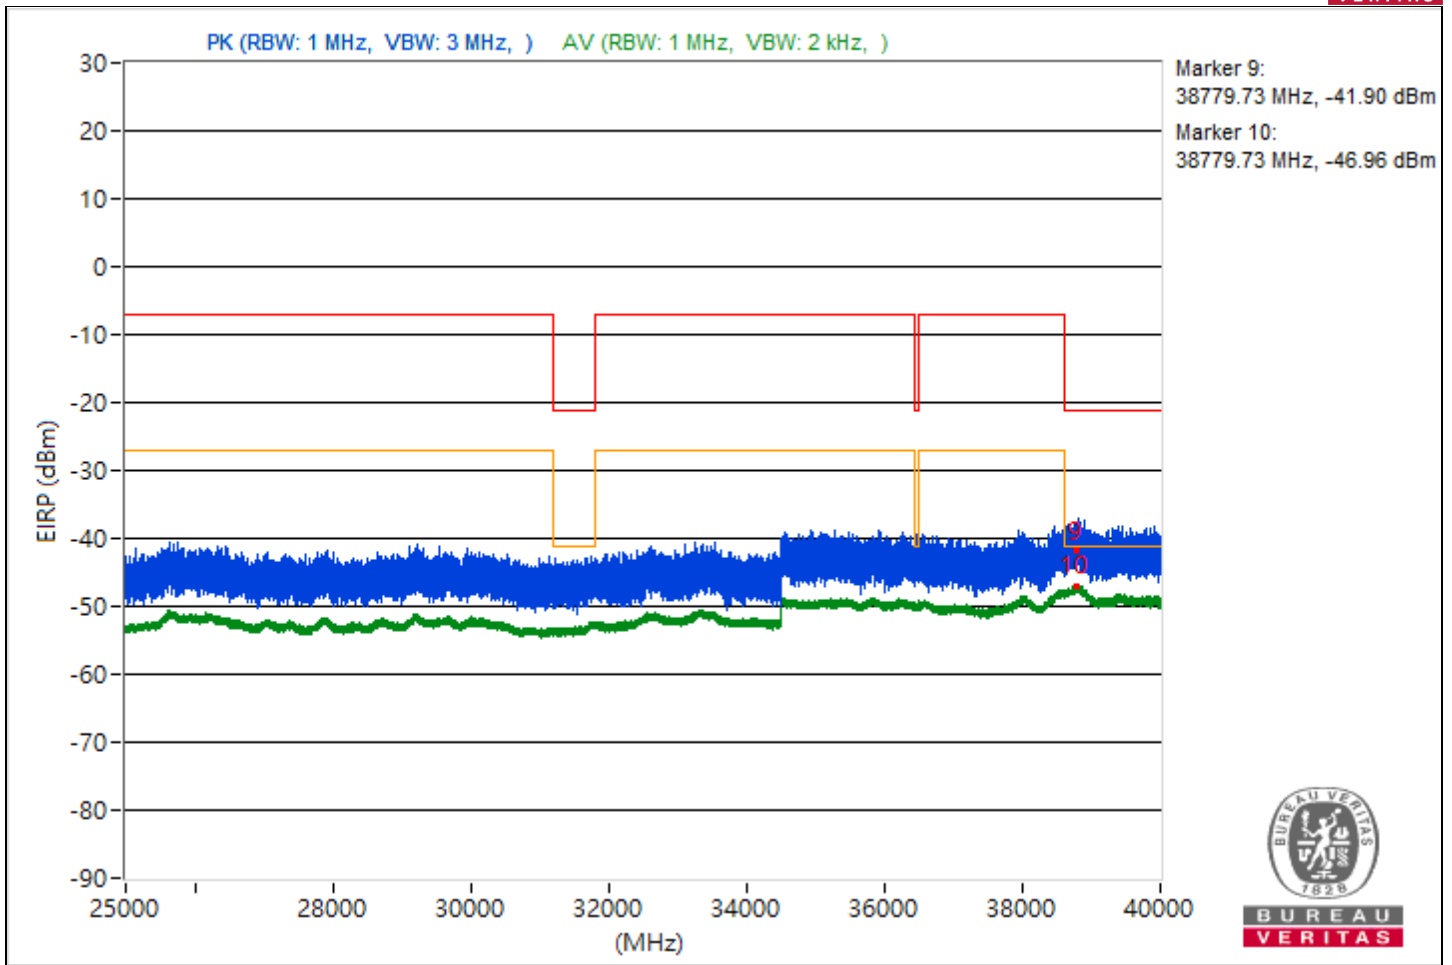


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3839.43	47.52 PK	74	-26.48	-60.93	-57.84	8.37	-47.74
2	3839.43	39.73 AV	54	-14.27	-67.59	-66.33	8.37	-55.53
3	11005.42	45.18 PK	74	-28.82	-59.98	-63.73	8.37	-50.08
4	11005.42	38.14 AV	54	-15.86	-69.35	-67.79	8.37	-57.12
5	18777.2	47.73 PK	74	-26.27	-61.24	-57.4	8.37	-47.53
6	18777.2	40.46 AV	54	-13.54	-65.85	-66.54	8.37	-54.8
7	22246.9	49.14 PK	74	-24.86	-58.5	-56.69	8.37	-46.12
8	22246.9	41.88 AV	54	-12.12	-64.18	-65.43	8.37	-53.38
9	38829.07	51.53 PK	74	-22.47	-56.03	-54.36	8.37	-43.73
10	38829.07	46.37 AV	54	-7.63	-60.45	-60.09	8.37	-48.89

Note: Margin value = Emission Level - Limit value

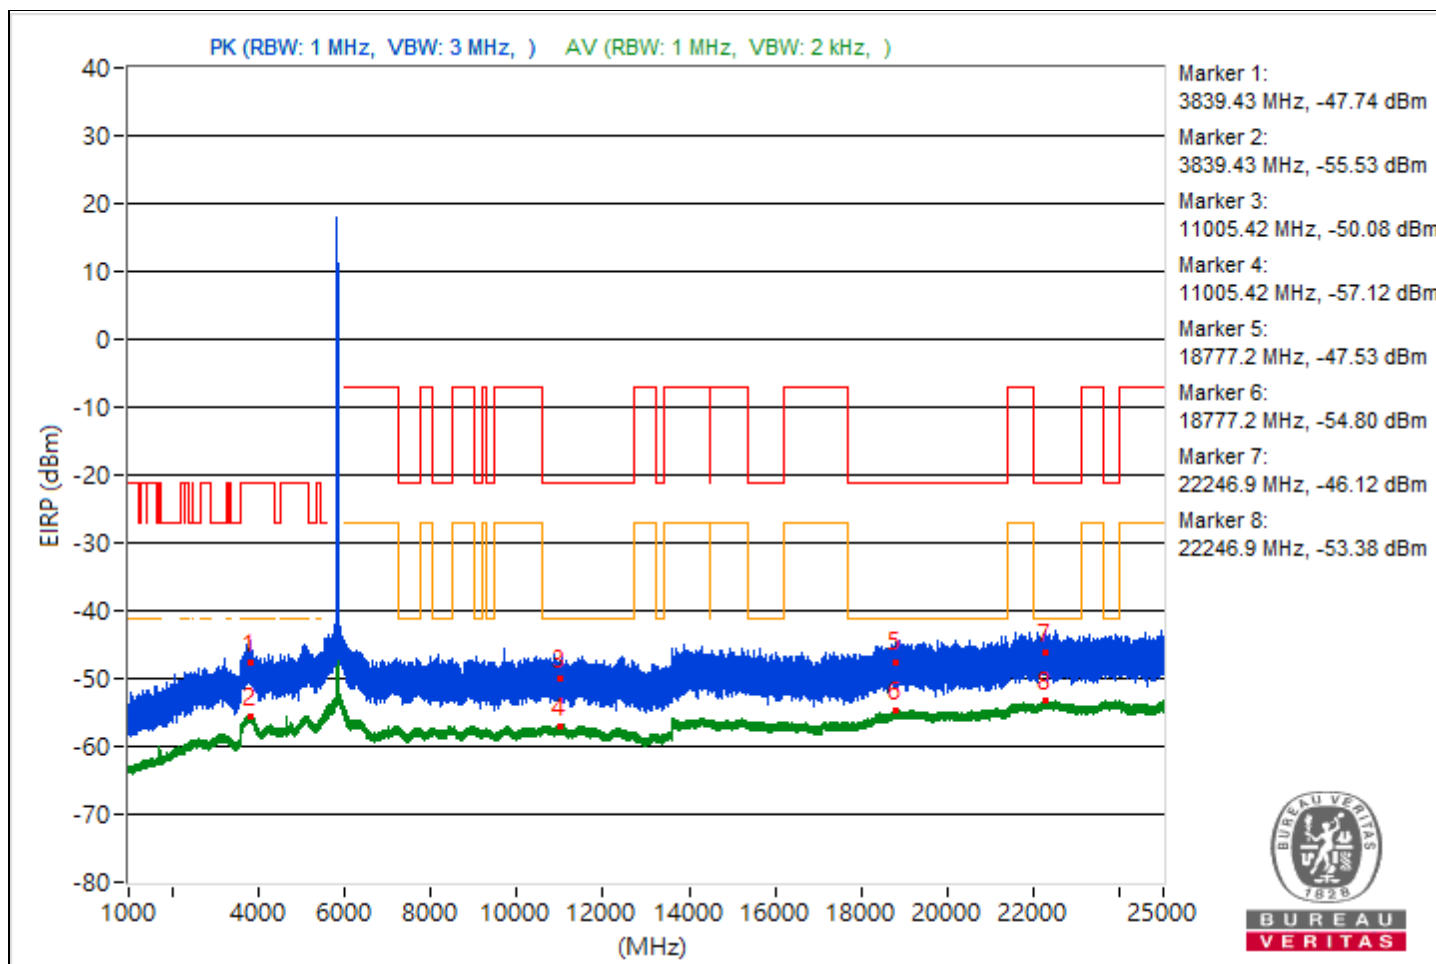


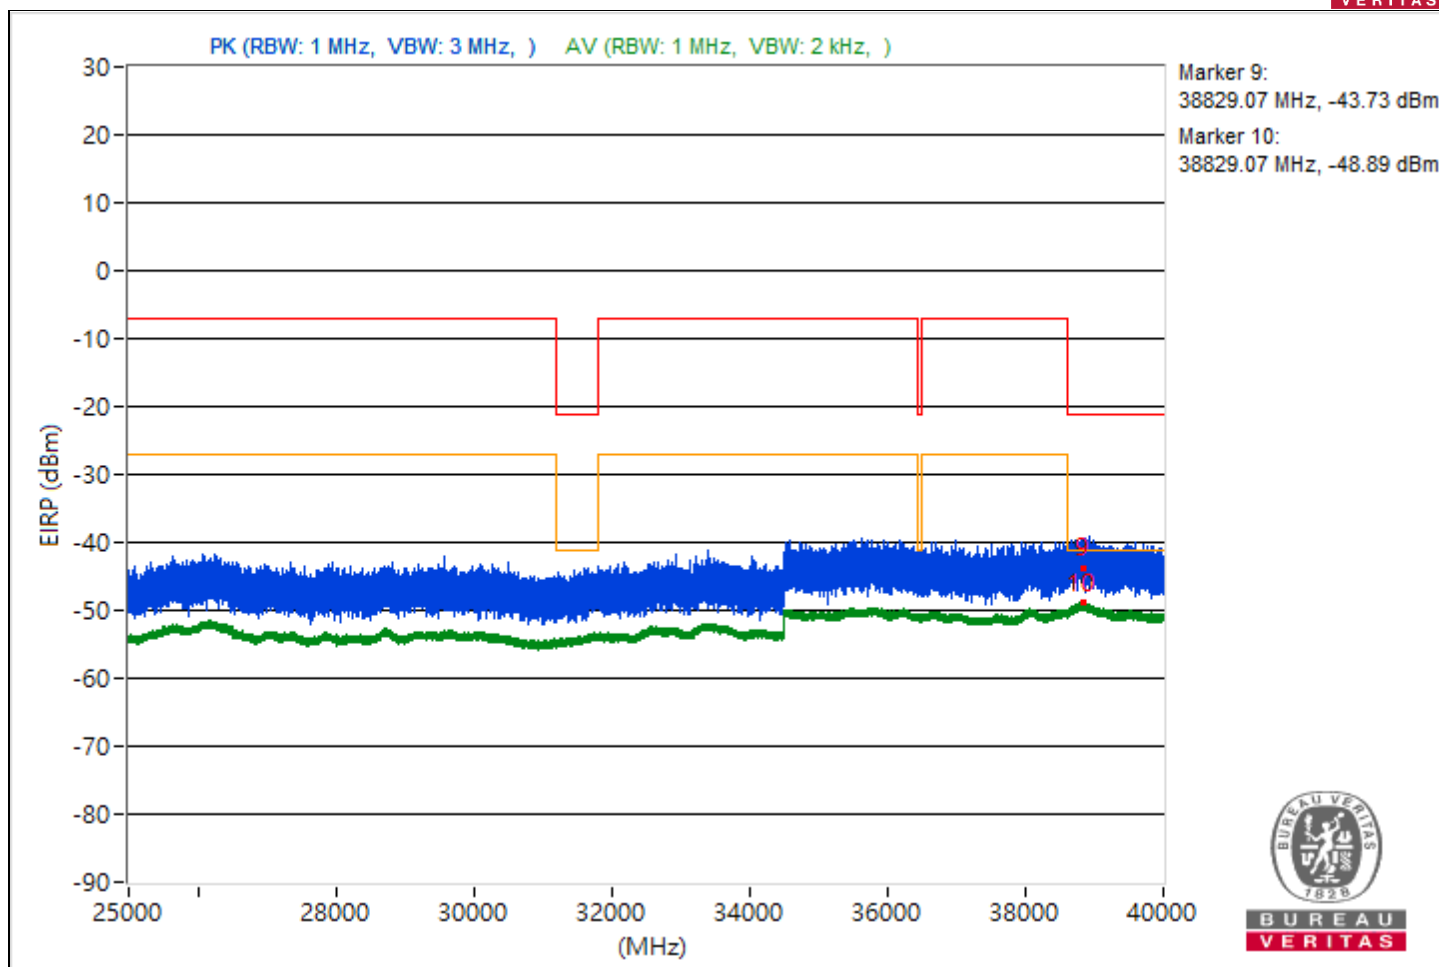


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4691.88	46.83 PK	74	-27.17	-59.42	-60.23	8.37	-48.43
2	4691.88	40.48 AV	54	-13.52	-64.38	-69.2	8.37	-54.78
3	10682.31	45.35 PK	74	-28.65	-61.67	-60.95	8.37	-49.91
4	10682.31	38.36 AV	54	-15.64	-67.97	-68.62	8.37	-56.9
5	18851.8	47.23 PK	74	-26.77	-60.53	-58.52	8.37	-48.03
6	18851.8	40.45 AV	54	-13.55	-66.59	-65.83	8.37	-54.81
7	23916.8	47.28 PK	74	-26.72	-60.32	-58.57	8.37	-47.98
8	23916.8	41.95 AV	54	-12.05	-64.03	-65.45	8.37	-53.31
9	38861.16	54.08 PK	74	-19.92	-51.98	-53.24	8.37	-41.18
10	38861.16	46.19 AV	54	-7.81	-60.07	-60.87	8.37	-49.07

Note: Margin value = Emission Level - Limit value

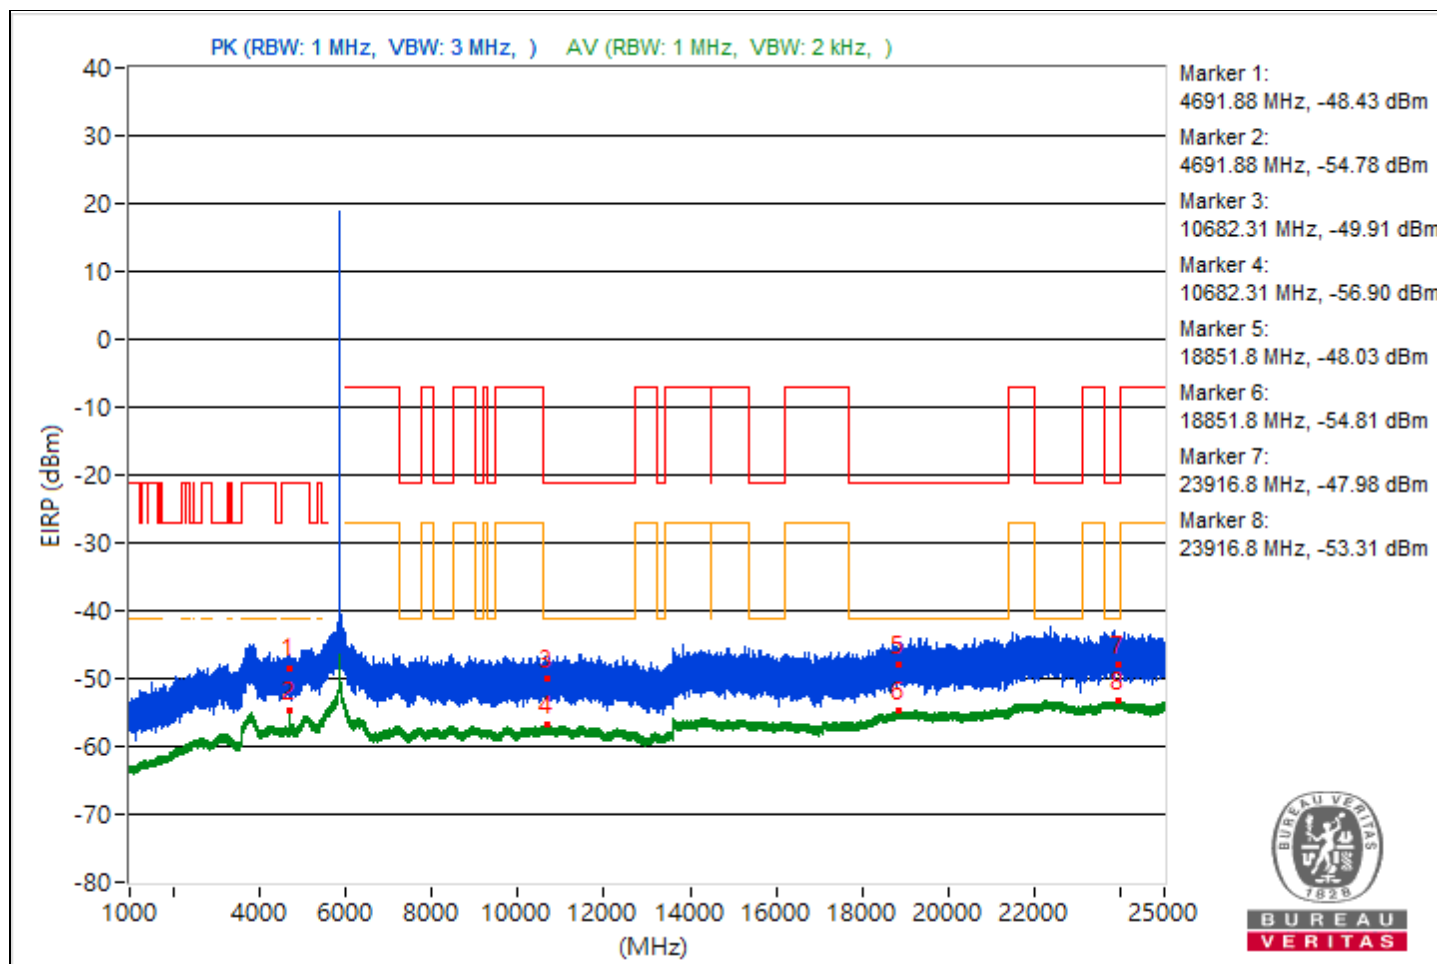


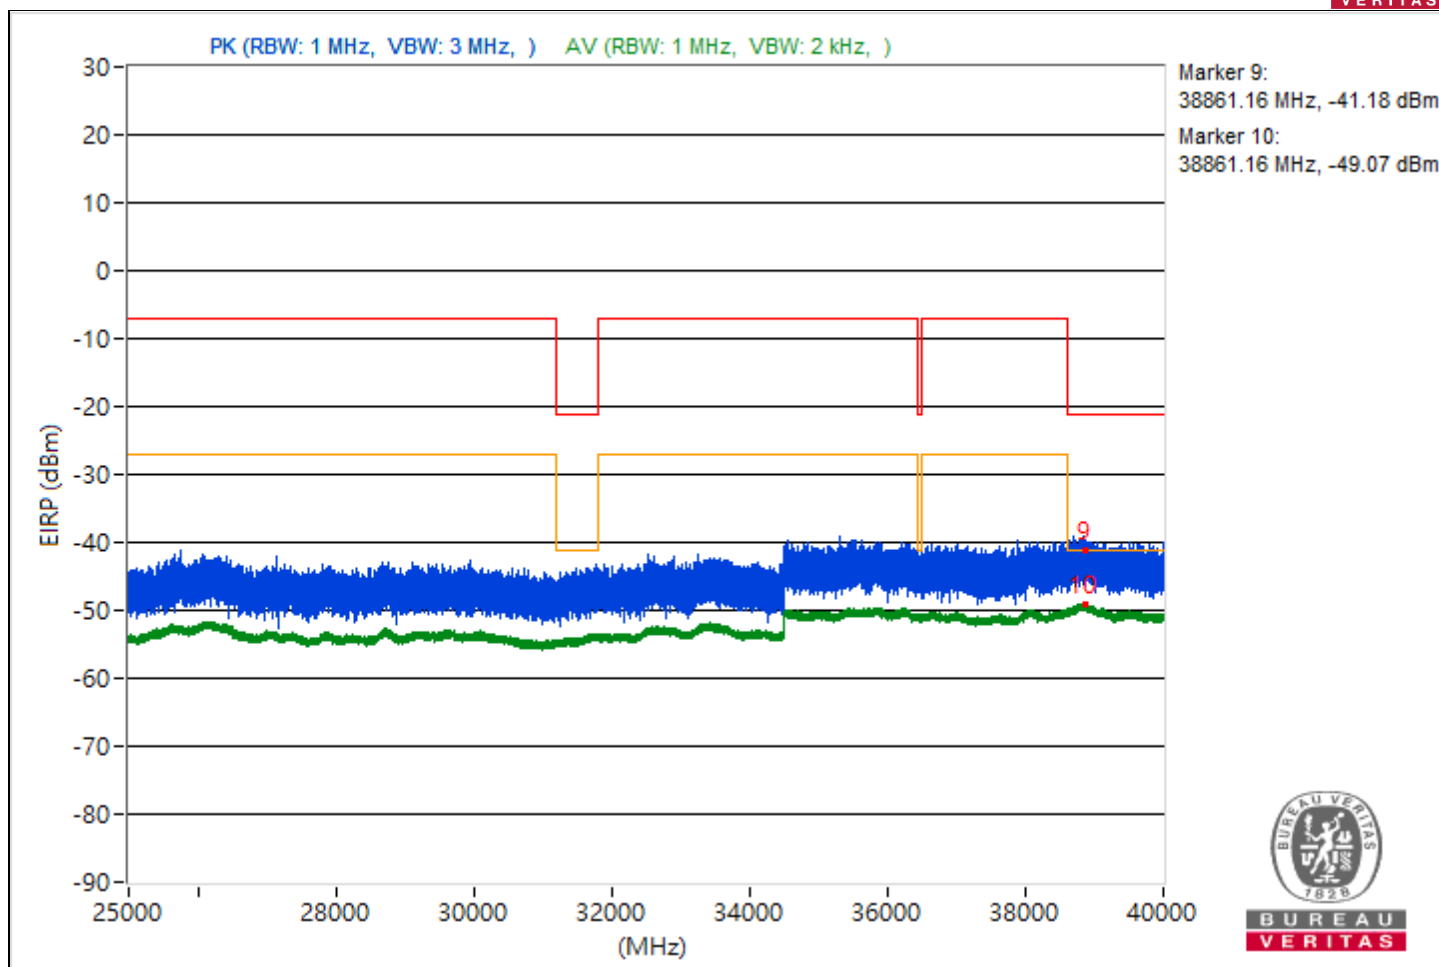


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4707.9	48.09 PK	74	-25.91	-58.13	-59.02	8.37	-47.17
2	4707.9	41.92 AV	54	-12.08	-63.05	-67.48	8.37	-53.34
3	9005.33	46.37 PK	74	-27.63	-61.53	-59.3	8.37	-48.89
4	9005.33	39.44 AV	54	-14.56	-67.09	-67.3	8.37	-55.82
5	19319.4	46.8 PK	74	-27.2	-61.44	-58.67	8.37	-48.46
6	19319.4	41.51 AV	54	-12.49	-65.65	-64.66	8.37	-53.75
7	23846.4	49.51 PK	74	-24.49	-57.57	-56.73	8.37	-45.75
8	23846.4	43.33 AV	54	-10.67	-63.88	-62.82	8.37	-51.93
9	38788	54.09 PK	74	-19.91	-52.27	-52.84	8.37	-41.17
10	38788	48.29 AV	54	-5.71	-58.14	-58.58	8.37	-46.97

Note: Margin value = Emission Level - Limit value

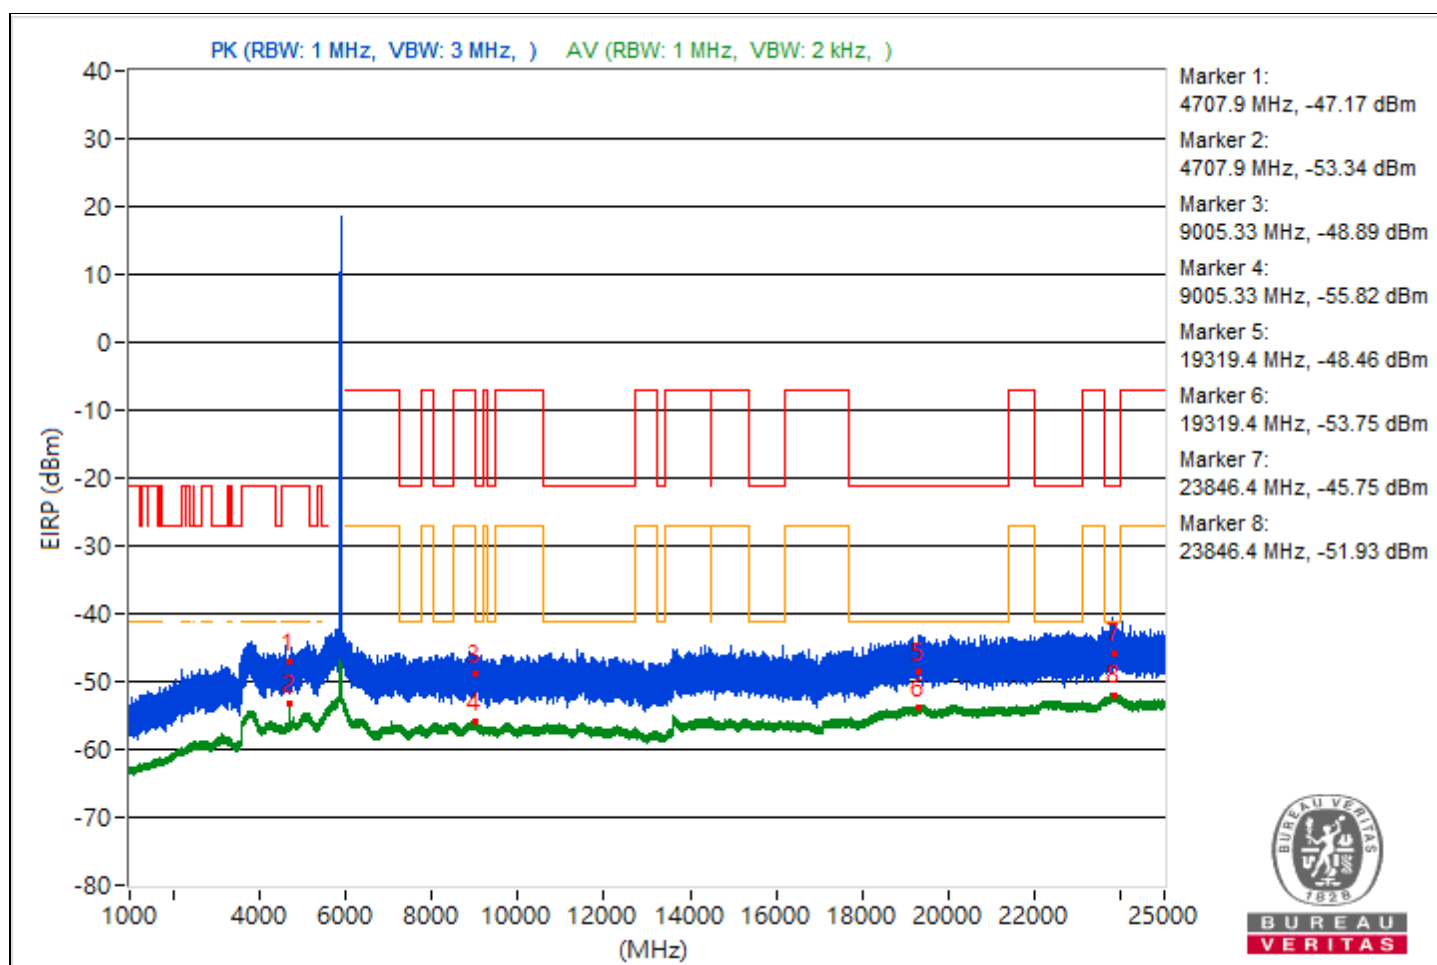


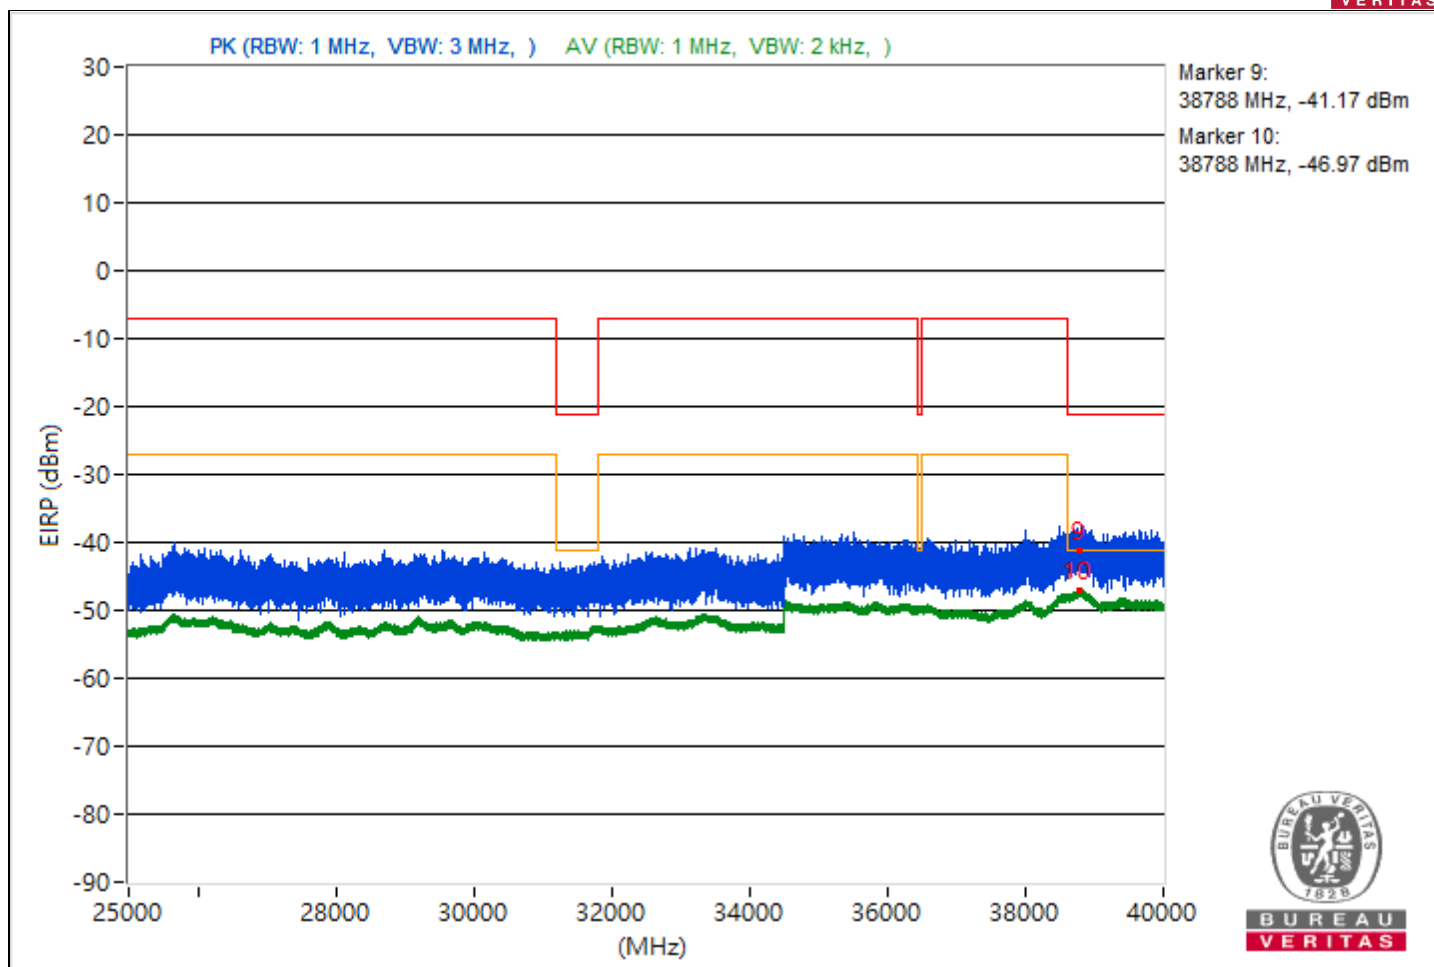


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.53	49.28 PK	74	-24.72	-57.29	-57.43	8.37	-45.98
2	5451.53	42.5 AV	54	-11.5	-64.41	-63.89	8.37	-52.76
3	10759.11	45.43 PK	74	-28.57	-59.92	-63.06	8.37	-49.83
4	10759.11	38.34 AV	54	-15.66	-67.96	-68.66	8.37	-56.92
5	18836	47.39 PK	74	-26.61	-58.2	-60.63	8.37	-47.87
6	18836	40.39 AV	54	-13.61	-65.79	-66.76	8.37	-54.87
7	22286.6	46.18 PK	74	-27.82	-63.15	-58.82	8.37	-49.08
8	22286.6	41.85 AV	54	-12.15	-65.61	-64.11	8.37	-53.41
9	38844.18	53.77 PK	74	-20.23	-54.84	-51.52	8.37	-41.49
10	38844.18	46.28 AV	54	-7.72	-60.02	-60.73	8.37	-48.98

Note: Margin value = Emission Level - Limit value

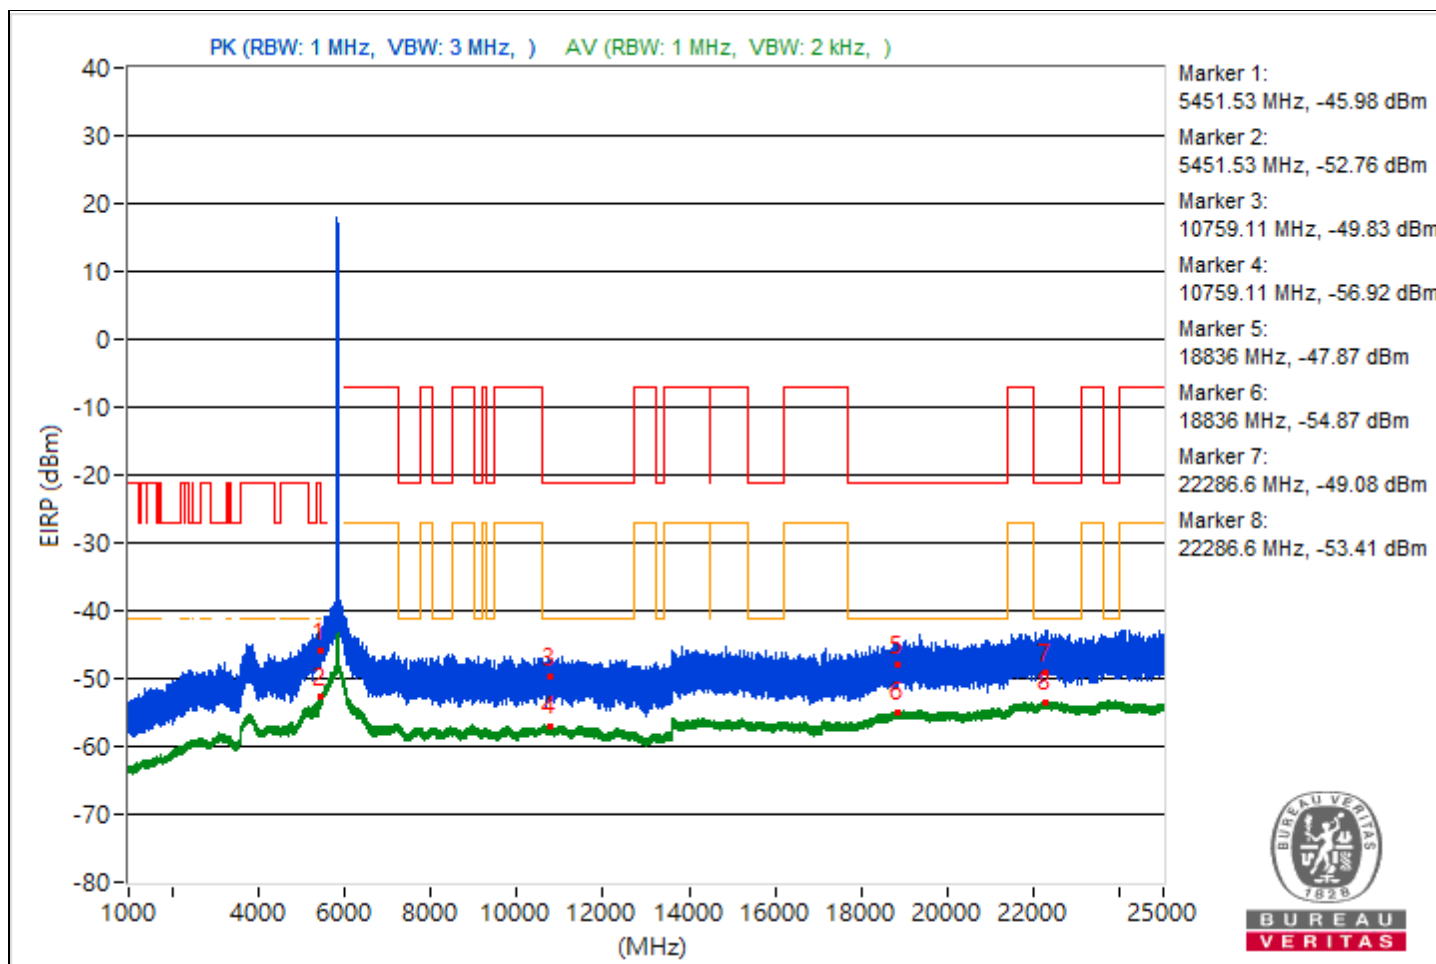


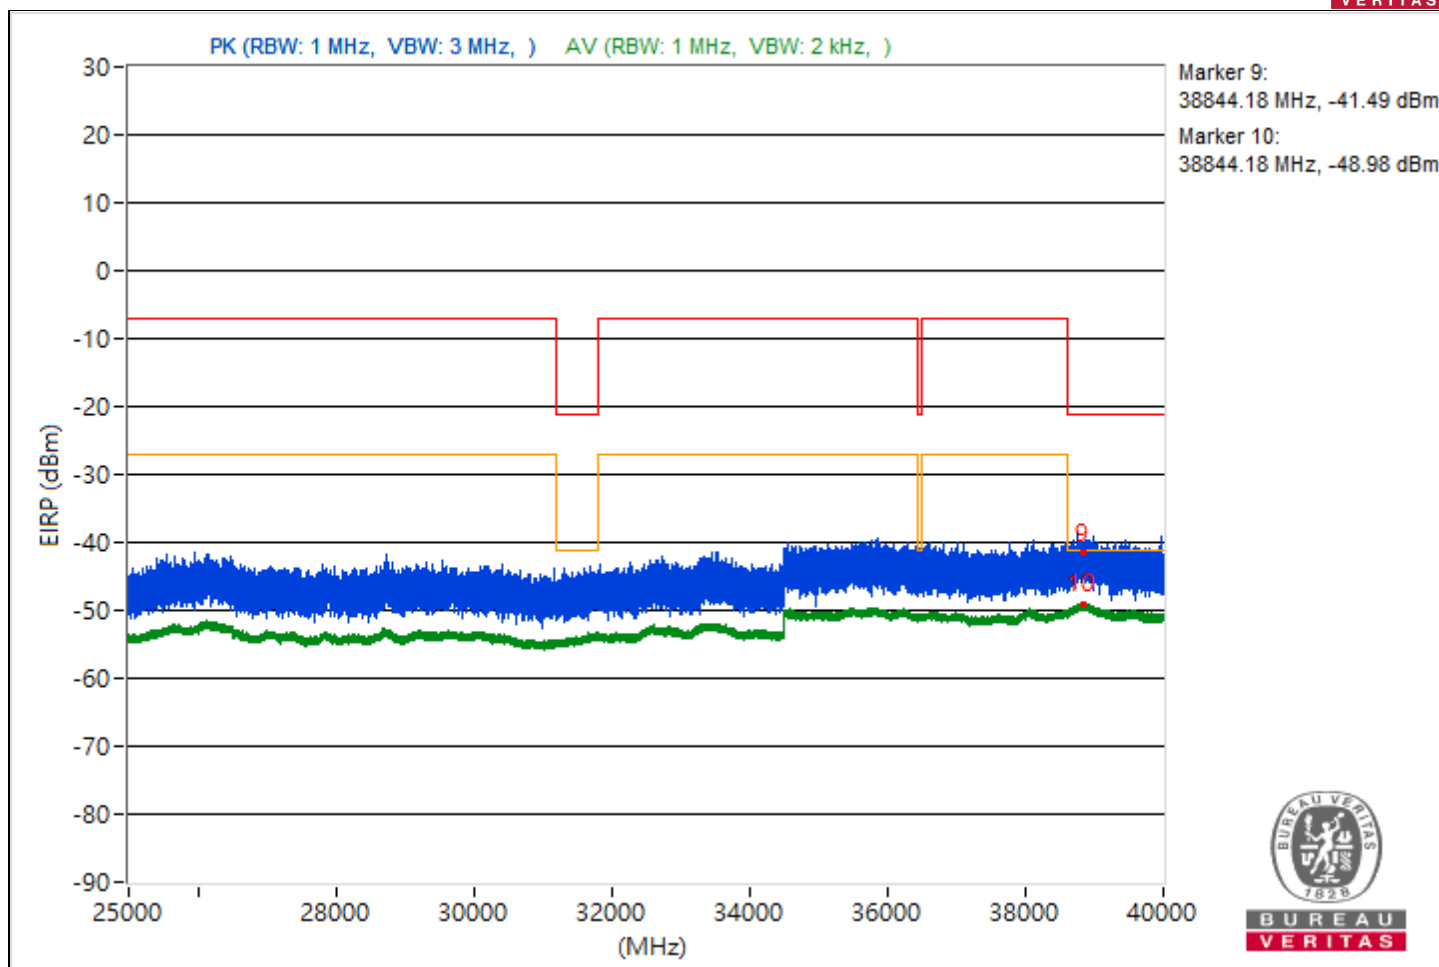


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5447.8	49.08 PK	74	-24.92	-57.6	-57.52	8.37	-46.18
2	5447.8	42.24 AV	54	-11.76	-64.17	-64.64	8.37	-53.02
3	11028.8	45.14 PK	74	-28.86	-62.71	-60.55	8.37	-50.12
4	11028.8	38.46 AV	54	-15.54	-68.02	-68.35	8.37	-56.8
5	19335.1	48.19 PK	74	-25.81	-58.19	-58.72	8.37	-47.07
6	19335.1	40.48 AV	54	-13.52	-66.78	-65.62	8.37	-54.78
7	22246	49.17 PK	74	-24.83	-58.46	-56.67	8.37	-46.09
8	22246	42.04 AV	54	-11.96	-64.87	-64.35	8.37	-53.22
9	38823.38	52.85 PK	74	-21.15	-55.64	-52.5	8.37	-42.41
10	38823.38	46.16 AV	54	-7.84	-60.07	-60.94	8.37	-49.1

Note: Margin value = Emission Level - Limit value

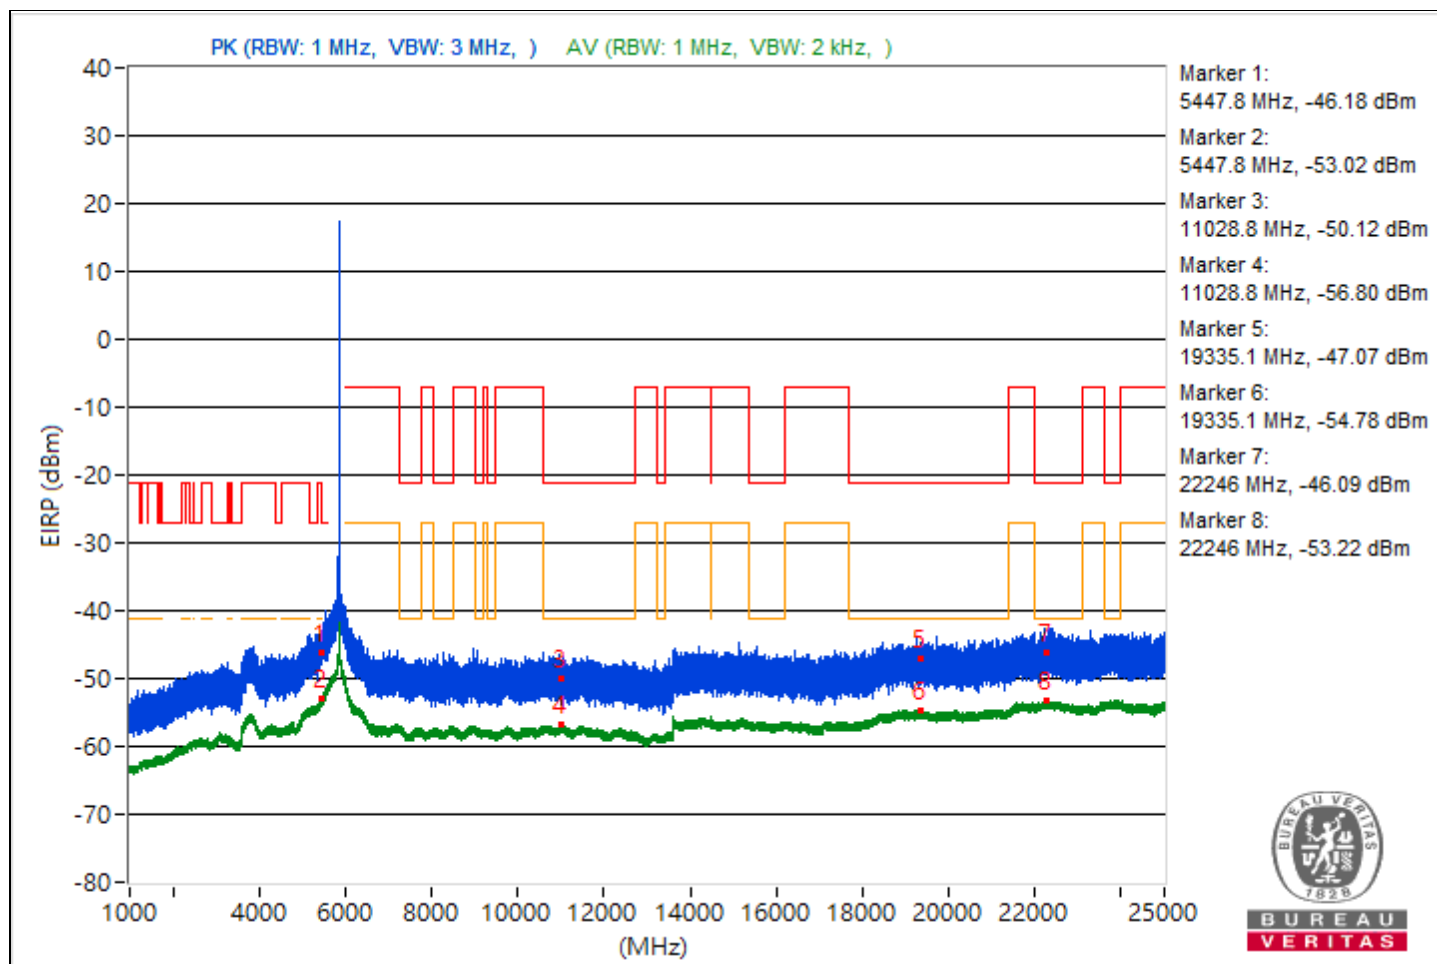


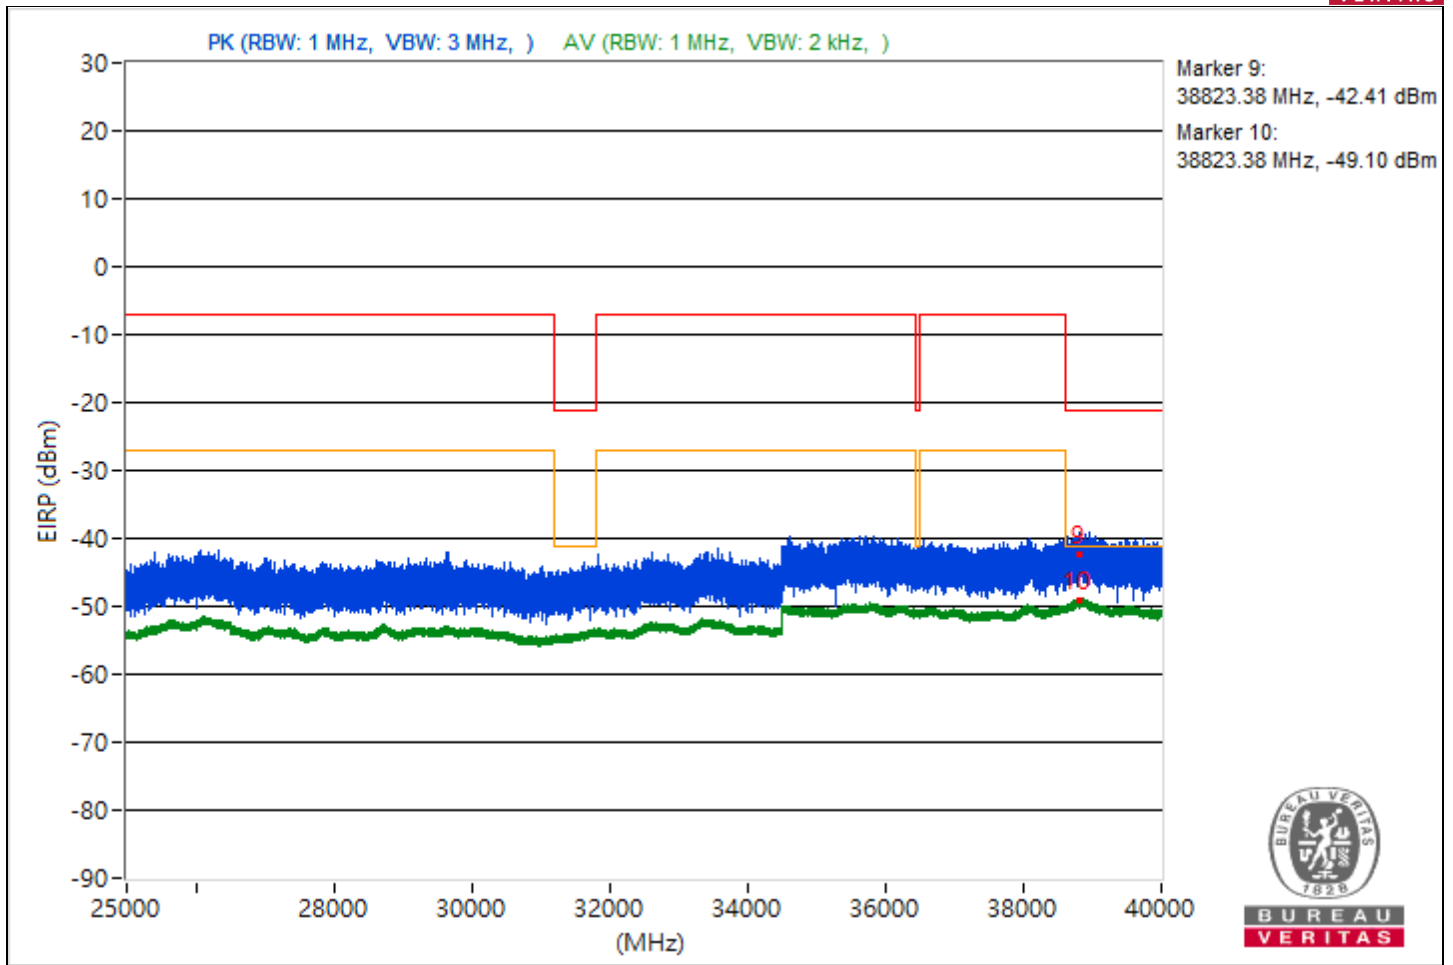


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4707.9	49.86 PK	74	-24.14	-54.81	-60.5	8.37	-45.4
2	4707.9	45.33 AV	54	-8.67	-58.95	-66.92	8.37	-49.93
3	8433.16	44.89 PK	74	-29.11	-61.08	-62.55	8.37	-50.37
4	8433.16	39.15 AV	54	-14.85	-67.17	-67.84	8.37	-56.11
5	19401.2	51.54 PK	74	-22.46	-55.33	-54.88	8.37	-43.72
6	19401.2	41.72 AV	54	-12.28	-65.17	-64.68	8.37	-53.54
7	23834.4	50.01 PK	74	-23.99	-56.21	-57.1	8.37	-45.25
8	23834.4	43.55 AV	54	-10.45	-63.08	-63.1	8.37	-51.71
9	38802.49	53.75 PK	74	-20.25	-52.63	-53.16	8.37	-41.51
10	38802.49	48.22 AV	54	-5.78	-58.84	-58.04	8.37	-47.04

Note: Margin value = Emission Level - Limit value

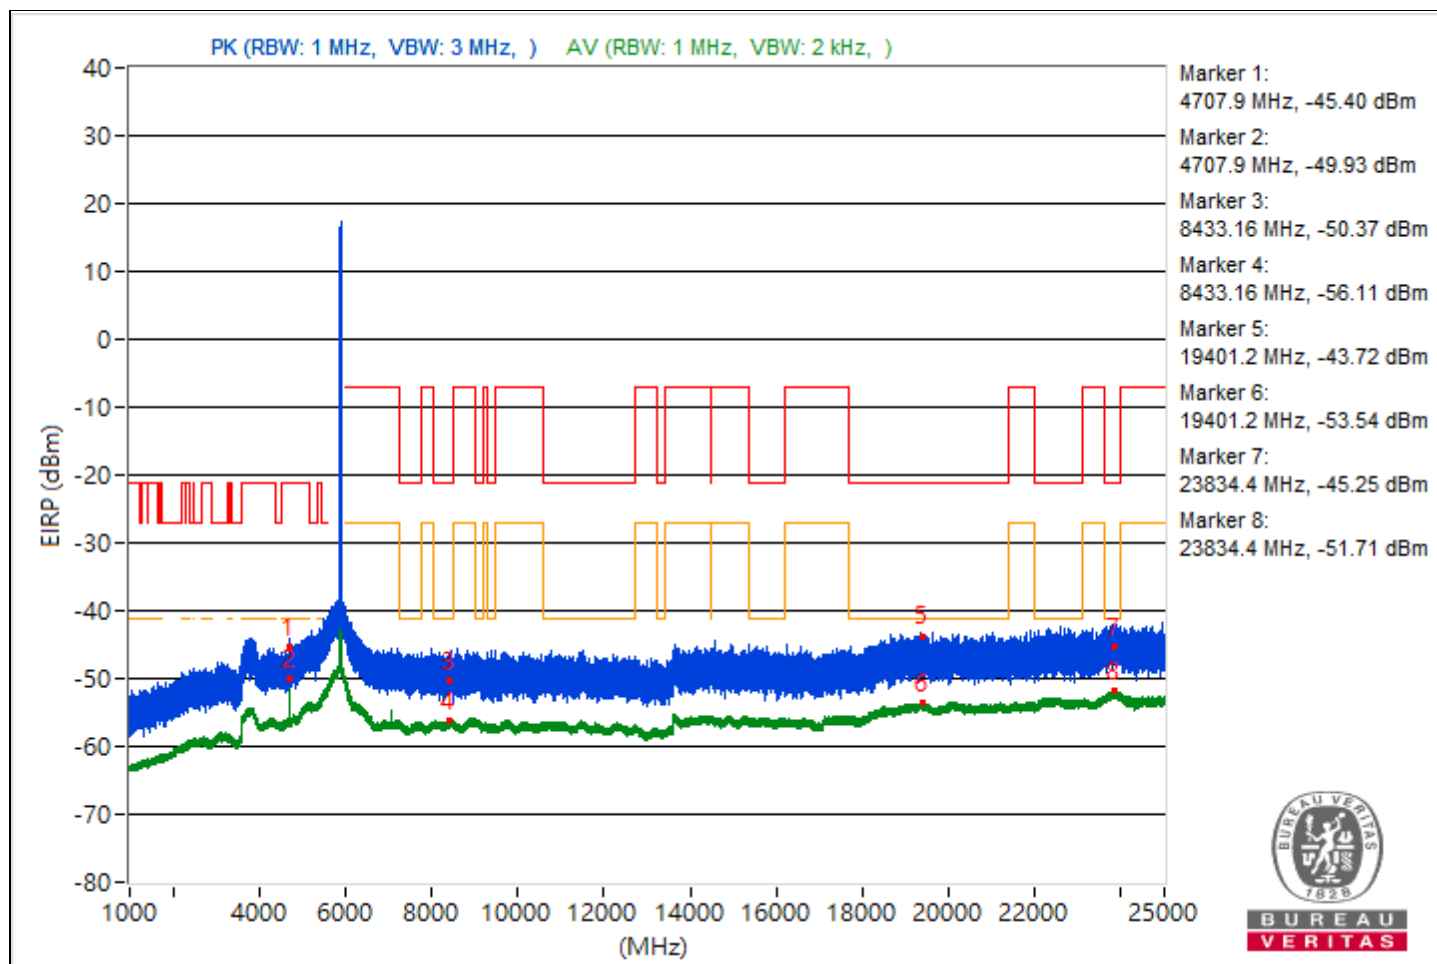


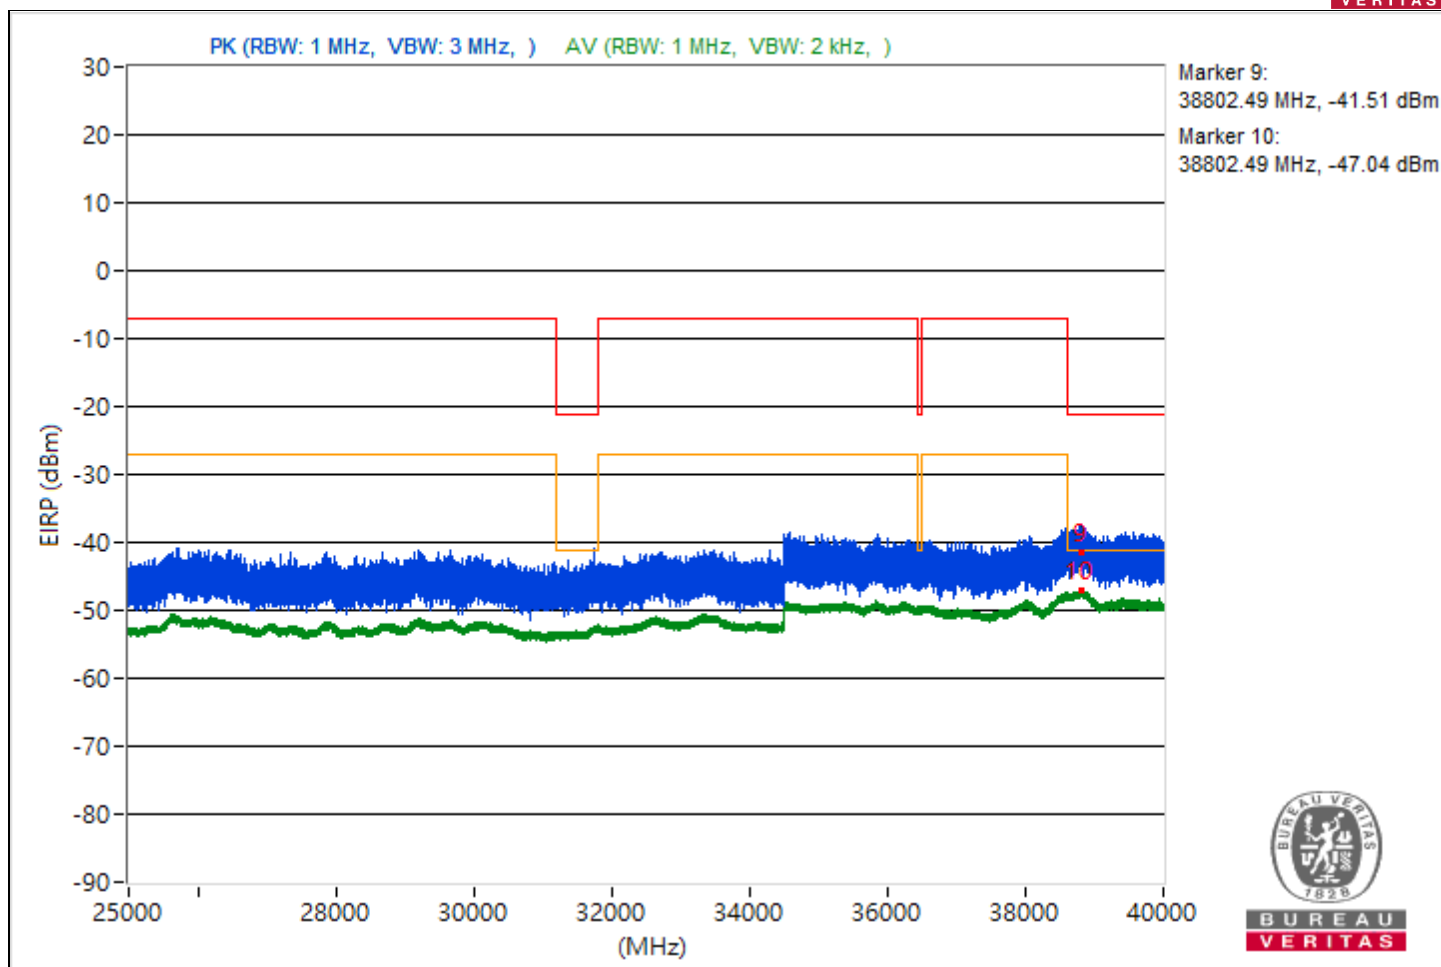


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5116.31	47.53 PK	74	-26.47	-59.82	-58.5	8.37	-47.73
2	5116.31	39.8 AV	54	-14.2	-67.52	-66.26	8.37	-55.46
3	10630.58	45.4 PK	74	-28.6	-60.85	-61.67	8.37	-49.86
4	10630.58	38.36 AV	54	-15.64	-67.76	-68.87	8.37	-56.9
5	19413.3	48.04 PK	74	-25.96	-59.75	-57.68	8.37	-47.22
6	19413.3	40.62 AV	54	-13.38	-66.22	-65.83	8.37	-54.64
7	23656	47.92 PK	74	-26.08	-57.75	-59.98	8.37	-47.34
8	23656	41.82 AV	54	-12.18	-65.29	-64.4	8.37	-53.44
9	38857.07	51.46 PK	74	-22.54	-55.02	-55.35	8.37	-43.8
10	38857.07	46.24 AV	54	-7.76	-60.13	-60.69	8.37	-49.02

Note: Margin value = Emission Level - Limit value

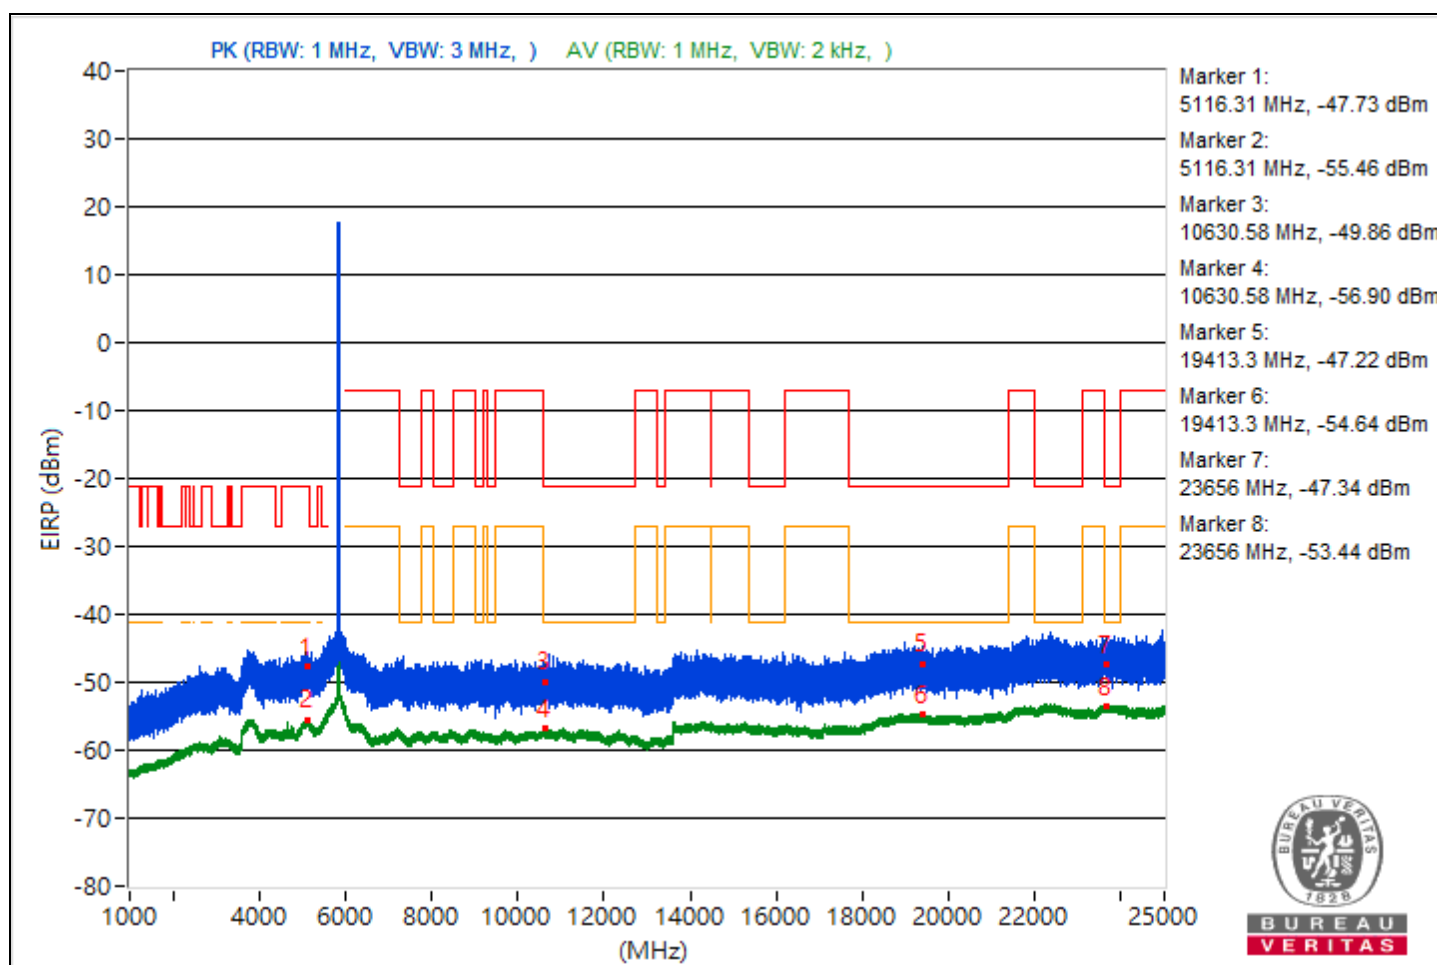


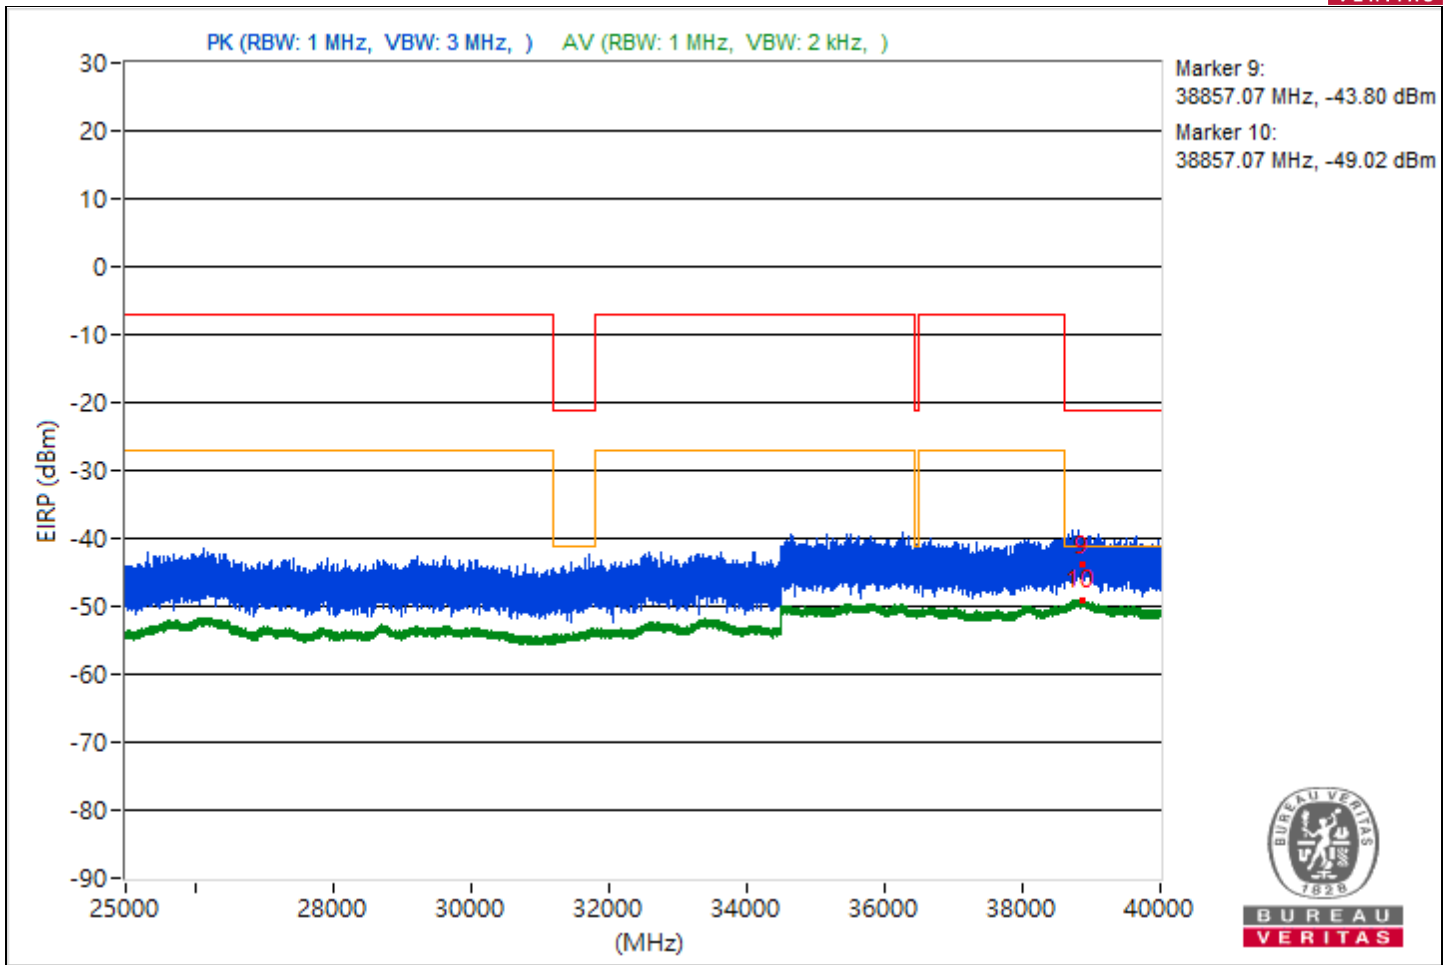


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5122.92	46.65 PK	74	-27.35	-60.99	-59.17	8.37	-48.61
2	5122.92	39.95 AV	54	-14.05	-67.21	-66.22	8.37	-55.31
3	11009.69	46.38 PK	74	-27.62	-58.97	-62.12	8.37	-48.88
4	11009.69	38.31 AV	54	-15.69	-67.76	-69	8.37	-56.95
5	19285.2	46.07 PK	74	-27.93	-60.58	-60.56	8.37	-49.19
6	19285.2	40.61 AV	54	-13.39	-65.64	-66.47	8.37	-54.65
7	23898.2	47.56 PK	74	-26.44	-58.18	-60.21	8.37	-47.7
8	23898.2	42.03 AV	54	-11.97	-64.17	-65.09	8.37	-53.23
9	38886.67	53.5 PK	74	-20.5	-55.87	-51.47	8.37	-41.76
10	38886.67	46.1 AV	54	-7.9	-60.06	-61.07	8.37	-49.16

Note: Margin value = Emission Level - Limit value

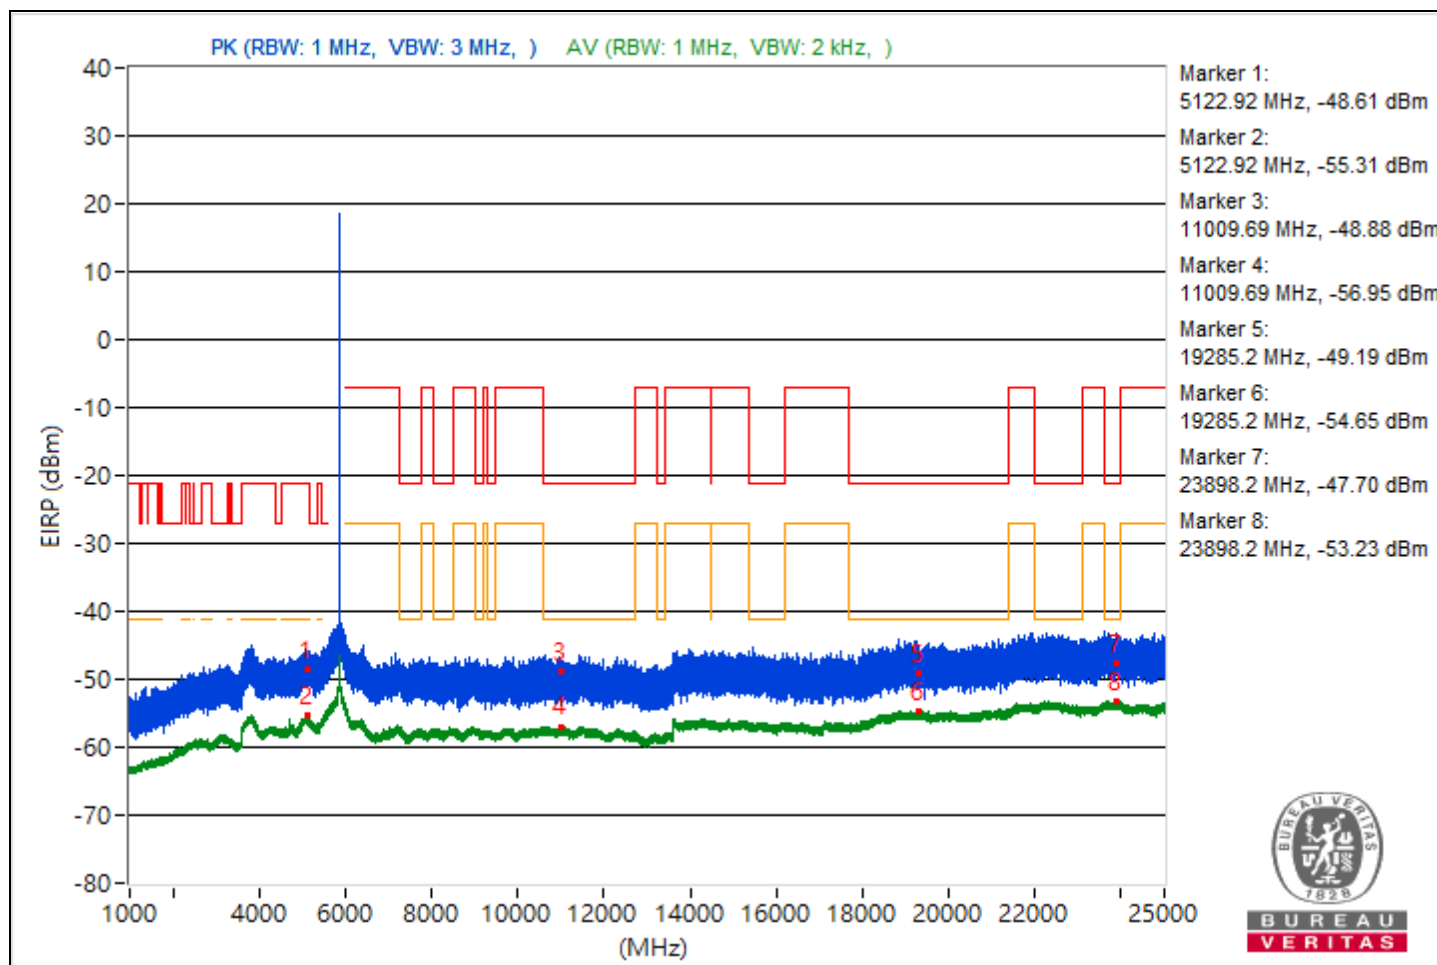


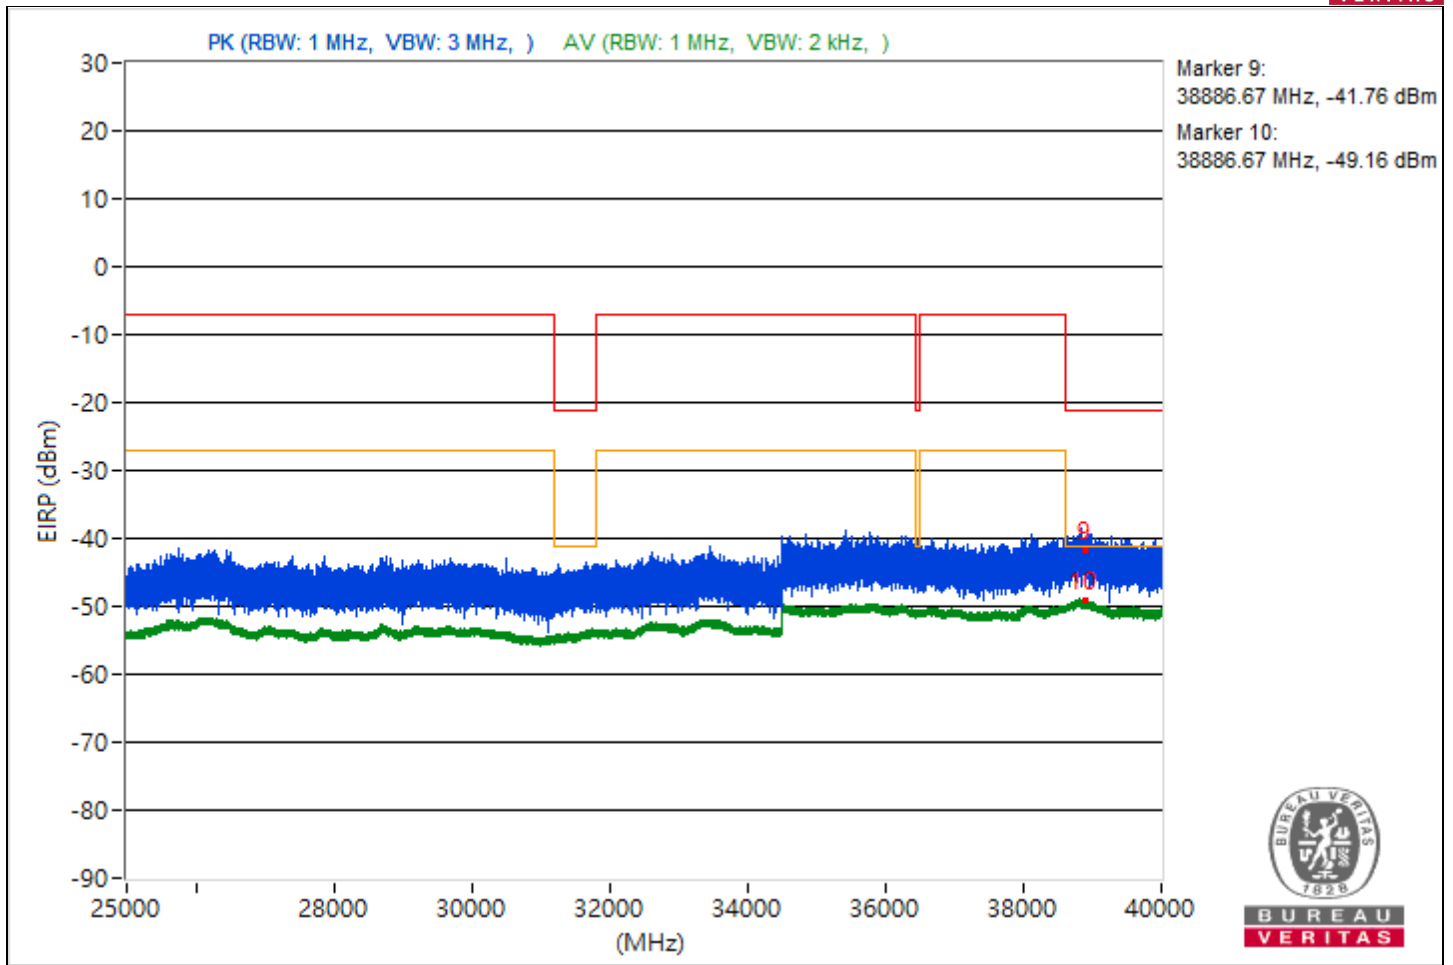


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5111.72	46.77 PK	74	-27.23	-59.8	-59.95	8.37	-48.49
2	5111.72	39.67 AV	54	-14.33	-67.41	-66.57	8.37	-55.59
3	10792	43.12 PK	74	-30.88	-62.82	-64.36	8.37	-52.14
4	10792	38.17 AV	54	-15.83	-69.13	-67.9	8.37	-57.09
5	18873.3	47.89 PK	74	-26.11	-58.79	-58.7	8.37	-47.37
6	18873.3	40.45 AV	54	-13.55	-65.84	-66.57	8.37	-54.81
7	23669.9	48.9 PK	74	-25.1	-59.87	-56.31	8.37	-46.36
8	23669.9	41.81 AV	54	-12.19	-65.58	-64.2	8.37	-53.45
9	38854.13	53.5 PK	74	-20.5	-53.33	-52.94	8.37	-41.76
10	38854.13	46.27 AV	54	-7.73	-60.66	-60.11	8.37	-48.99

Note: Margin value = Emission Level - Limit value

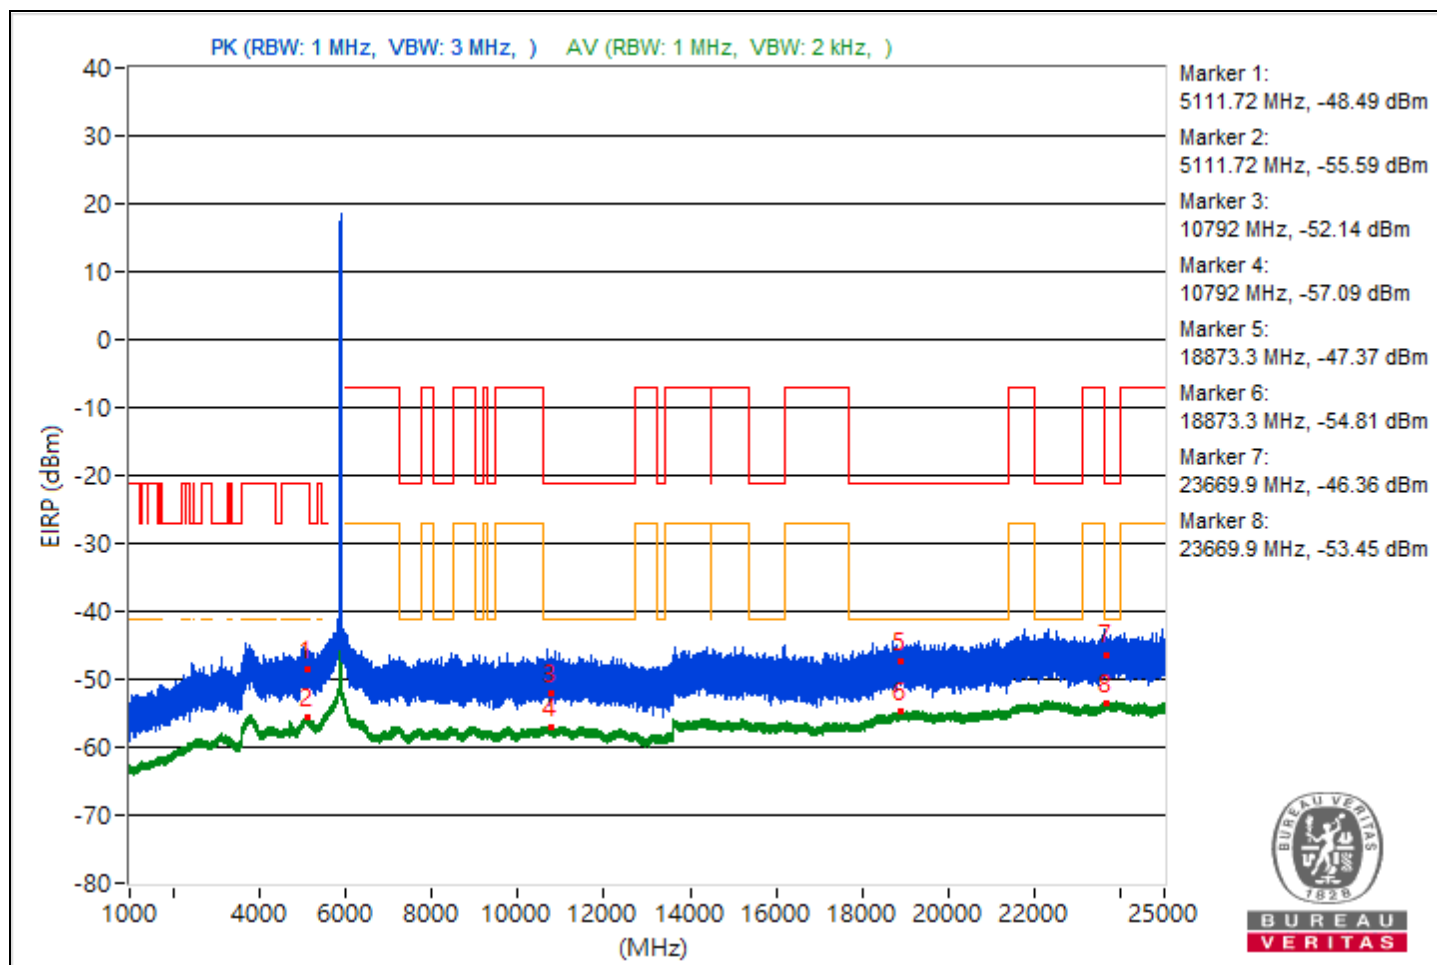


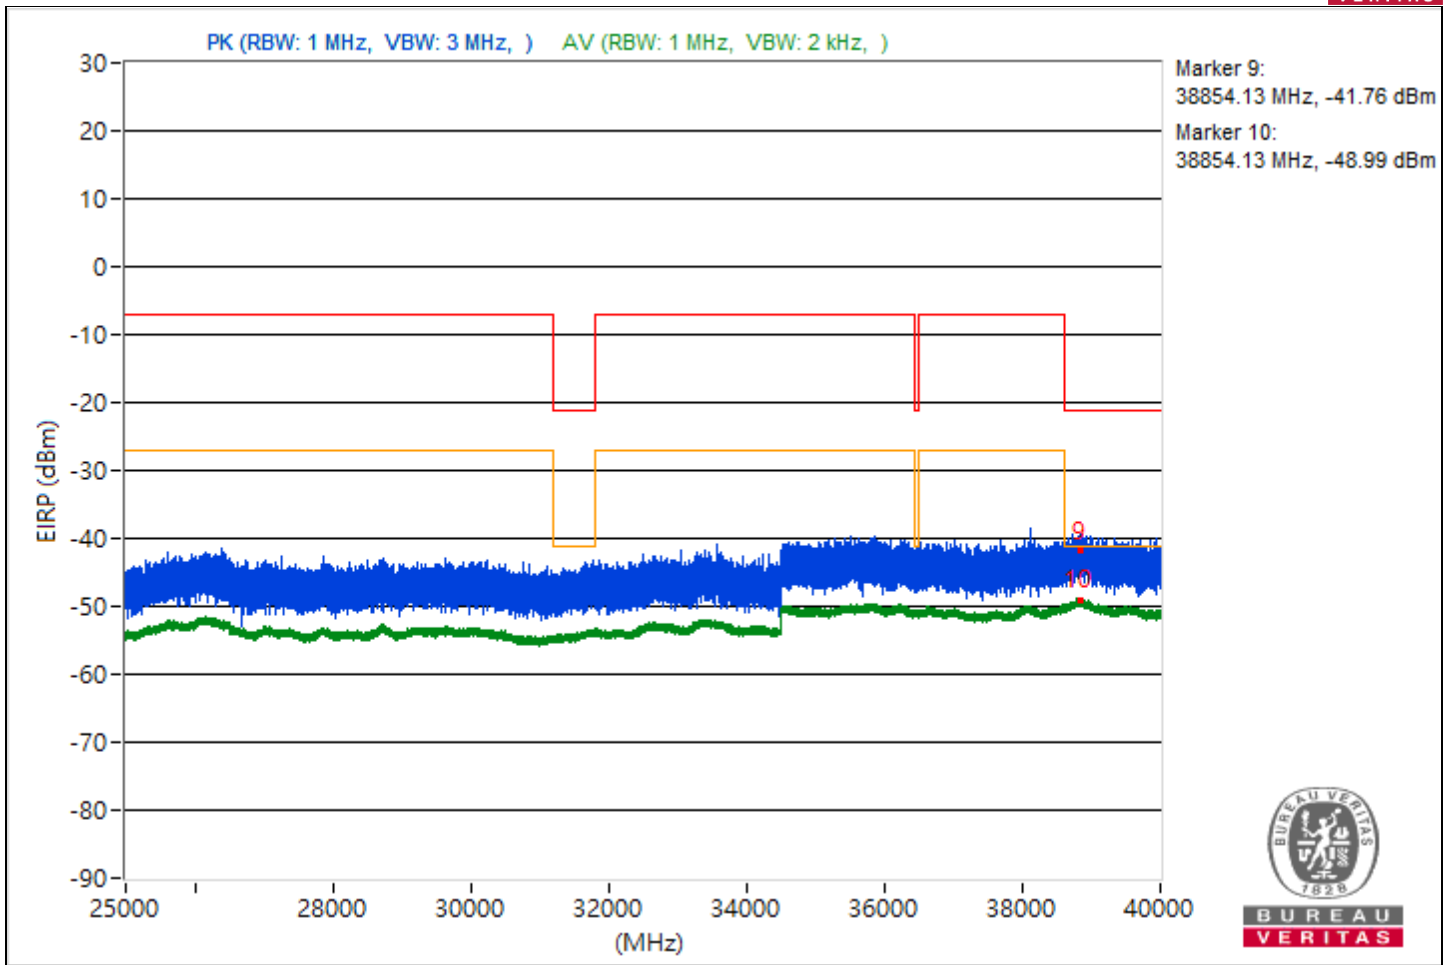


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5080.3	49.34 PK	74	-24.66	-55.45	-60.59	8.37	-45.92
2	5080.3	39.7 AV	54	-14.3	-67.36	-66.56	8.37	-55.56
3	10644.98	44.92 PK	74	-29.08	-63.78	-60.33	8.37	-50.34
4	10644.98	38.4 AV	54	-15.6	-67.84	-68.69	8.37	-56.86
5	18890.9	47.36 PK	74	-26.64	-60.54	-58.3	8.37	-47.9
6	18890.9	40.45 AV	54	-13.55	-65.64	-66.81	8.37	-54.81
7	22190.9	48.7 PK	74	-25.3	-57	-59.14	8.37	-46.56
8	22190.9	42.01 AV	54	-11.99	-64.36	-64.92	8.37	-53.25
9	38900	51.51 PK	74	-22.49	-54.3	-56.15	8.37	-43.75
10	38900	46.17 AV	54	-7.83	-60.95	-60.03	8.37	-49.09

Note: Margin value = Emission Level - Limit value

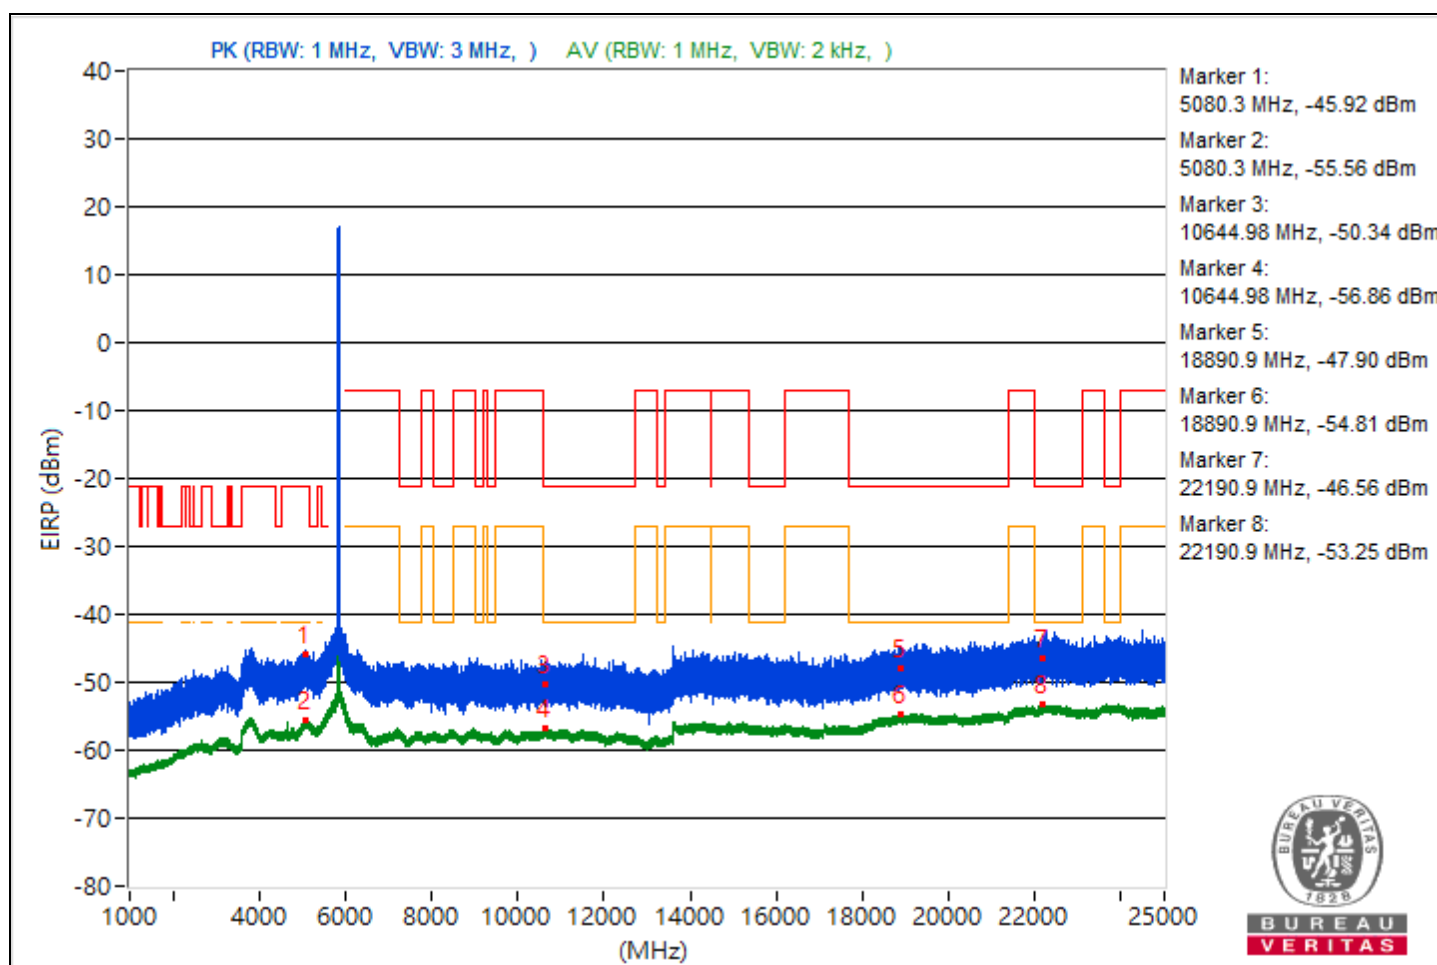

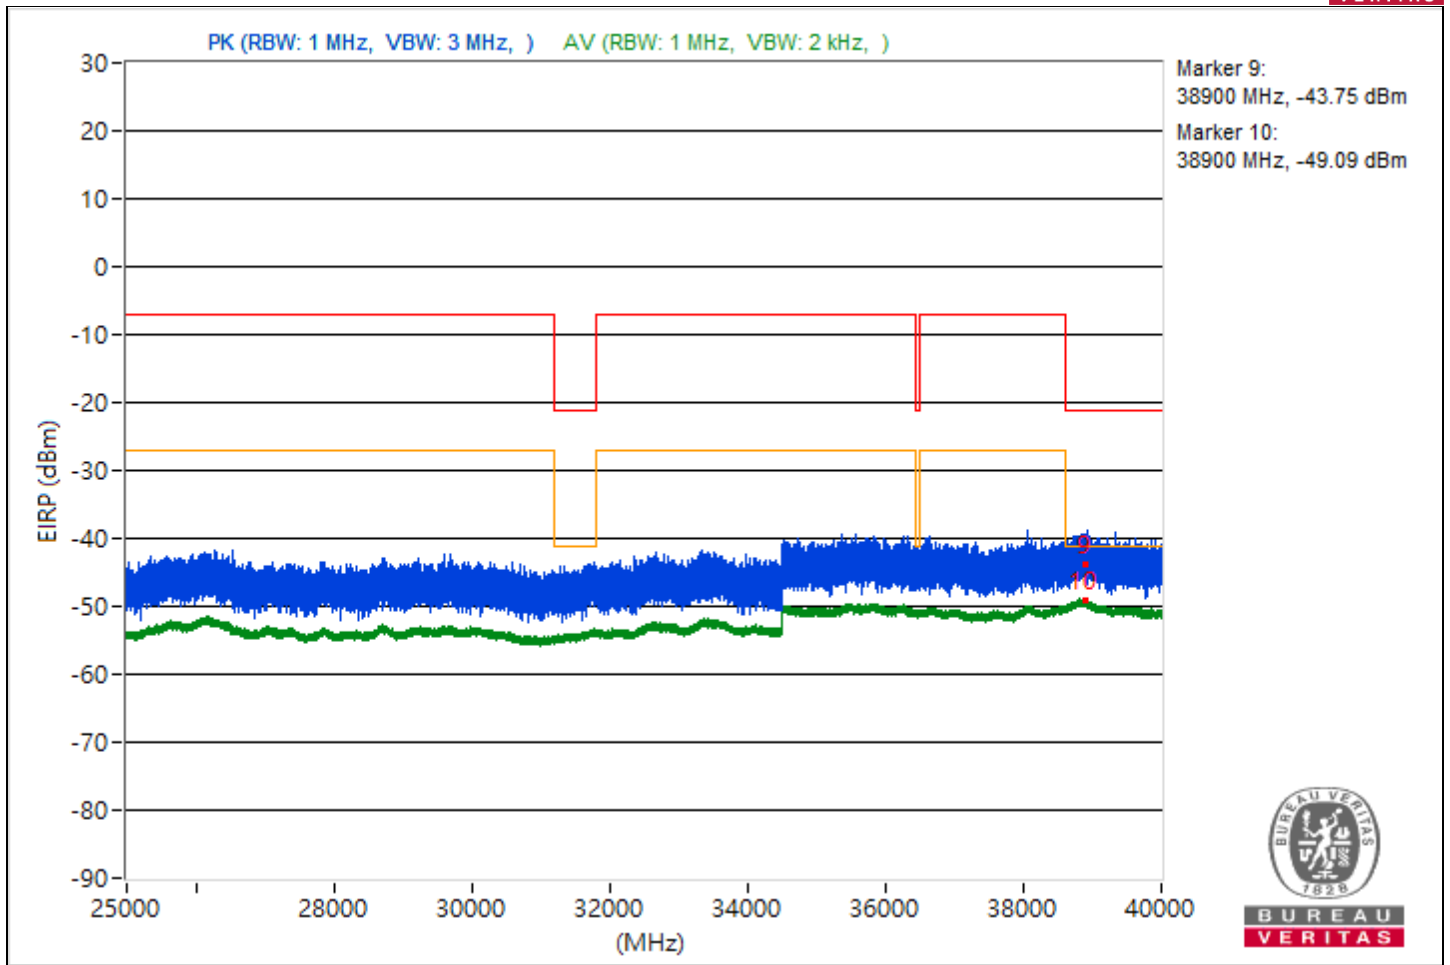



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.51	46.55 PK	74	-27.45	-58.82	-61.88	8.37	-48.71
2	3797.51	39.82 AV	54	-14.18	-67.26	-66.42	8.37	-55.44
3	10675.82	44.74 PK	74	-29.26	-60.59	-63.77	8.37	-50.52
4	10675.82	38.18 AV	54	-15.82	-68.06	-68.89	8.37	-57.08
5	19280.1	47.19 PK	74	-26.81	-60.45	-58.63	8.37	-48.07
6	19280.1	40.43 AV	54	-13.57	-65.75	-66.72	8.37	-54.83
7	22394.8	48.56 PK	74	-25.44	-58.44	-57.75	8.37	-46.7
8	22394.8	41.85 AV	54	-12.15	-65.28	-64.35	8.37	-53.41
9	38771.2	54.68 PK	74	-19.32	-51.32	-52.72	8.37	-40.58
10	38771.2	46.36 AV	54	-7.64	-60.84	-59.78	8.37	-48.9

Note: Margin value = Emission Level - Limit value

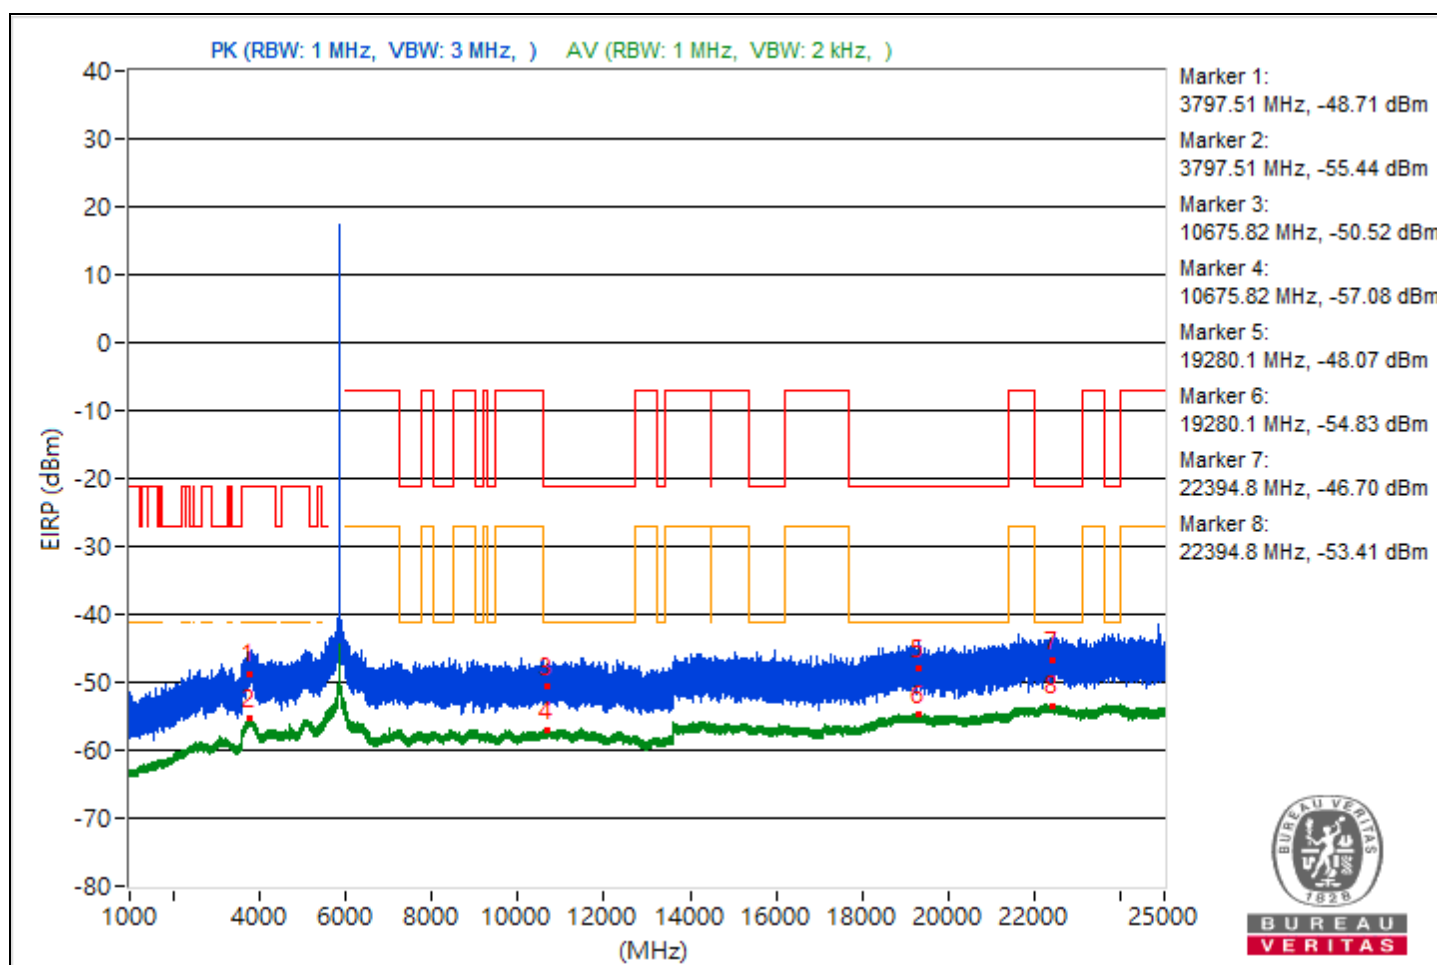

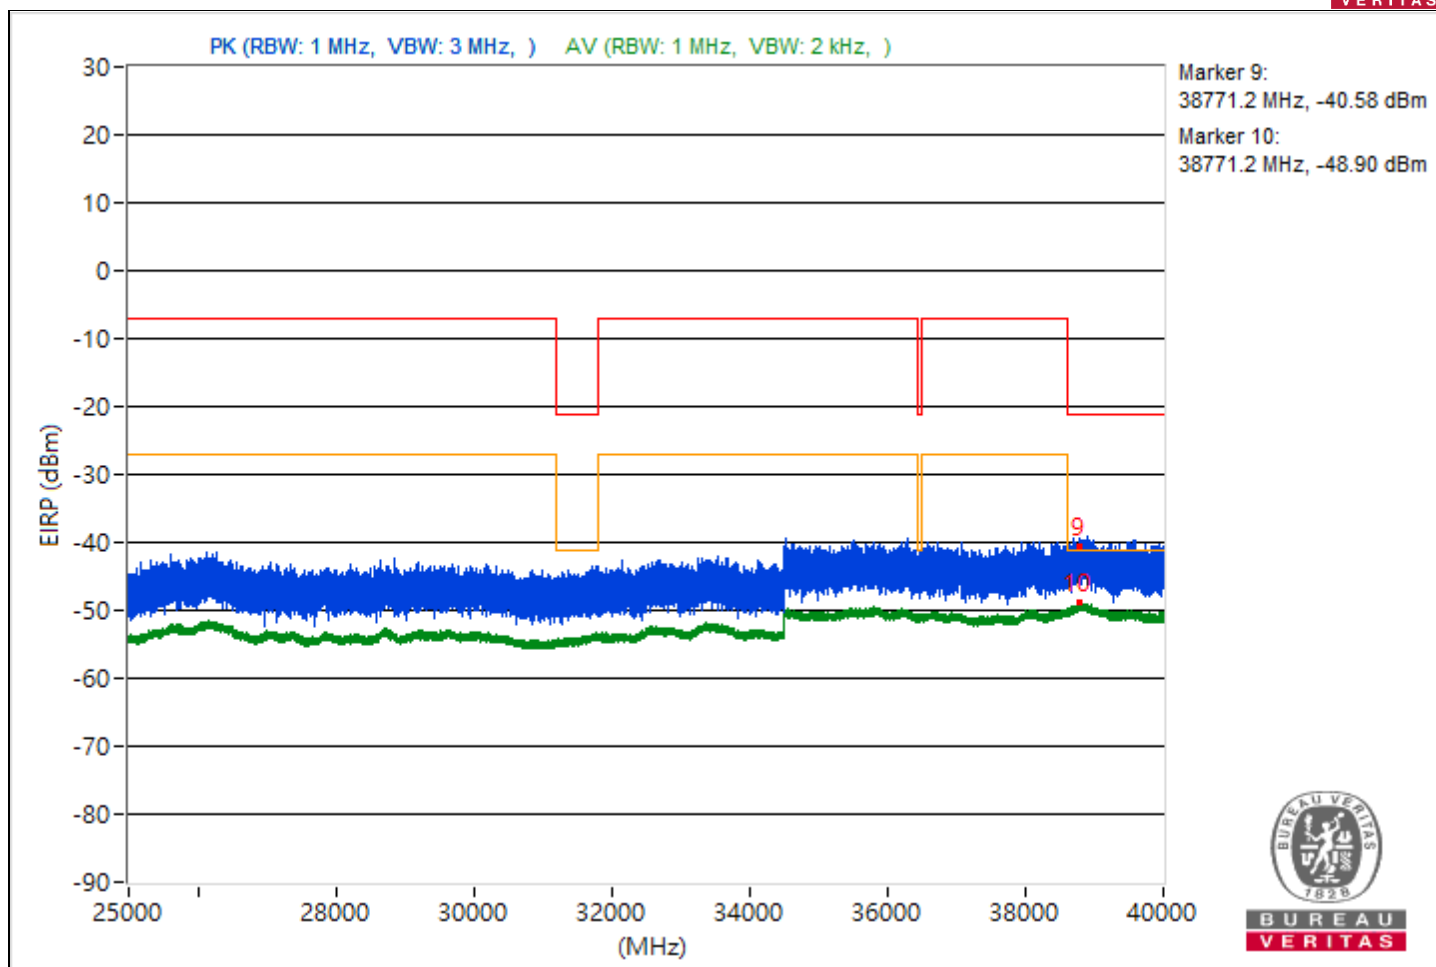



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 67% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4707.98	48.36 PK	74	-25.64	-56.48	-61.42	8.37	-46.9
2	4707.98	41.66 AV	54	-12.34	-63.24	-67.93	8.37	-53.6
3	8436.18	47.33 PK	74	-26.67	-60.39	-58.44	8.37	-47.93
4	8436.18	39.09 AV	54	-14.91	-68.14	-67.02	8.37	-56.17
5	19389.6	47.72 PK	74	-26.28	-58.28	-59.67	8.37	-47.54
6	19389.6	41.75 AV	54	-12.25	-64.56	-65.25	8.37	-53.51
7	23776.7	50.15 PK	74	-23.85	-55.67	-57.51	8.37	-45.11
8	23776.7	43.44 AV	54	-10.56	-63.63	-62.81	8.37	-51.82
9	38828.71	54.78 PK	74	-19.22	-56.76	-49.62	8.37	-40.48
10	38828.71	48.23 AV	54	-5.77	-58.04	-58.81	8.37	-47.03

Note: Margin value = Emission Level - Limit value

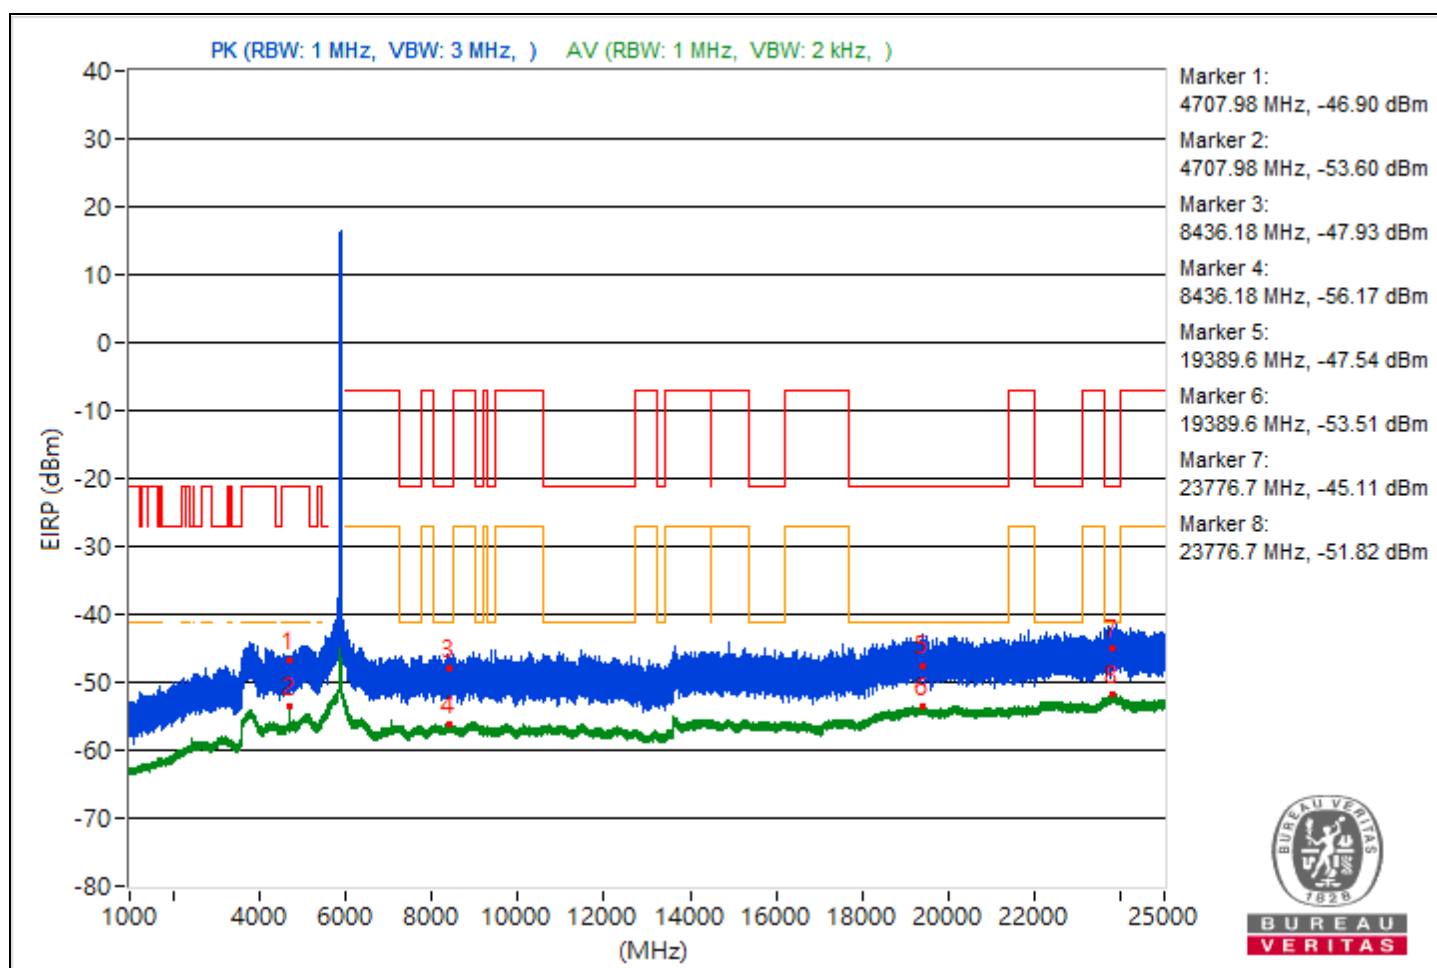

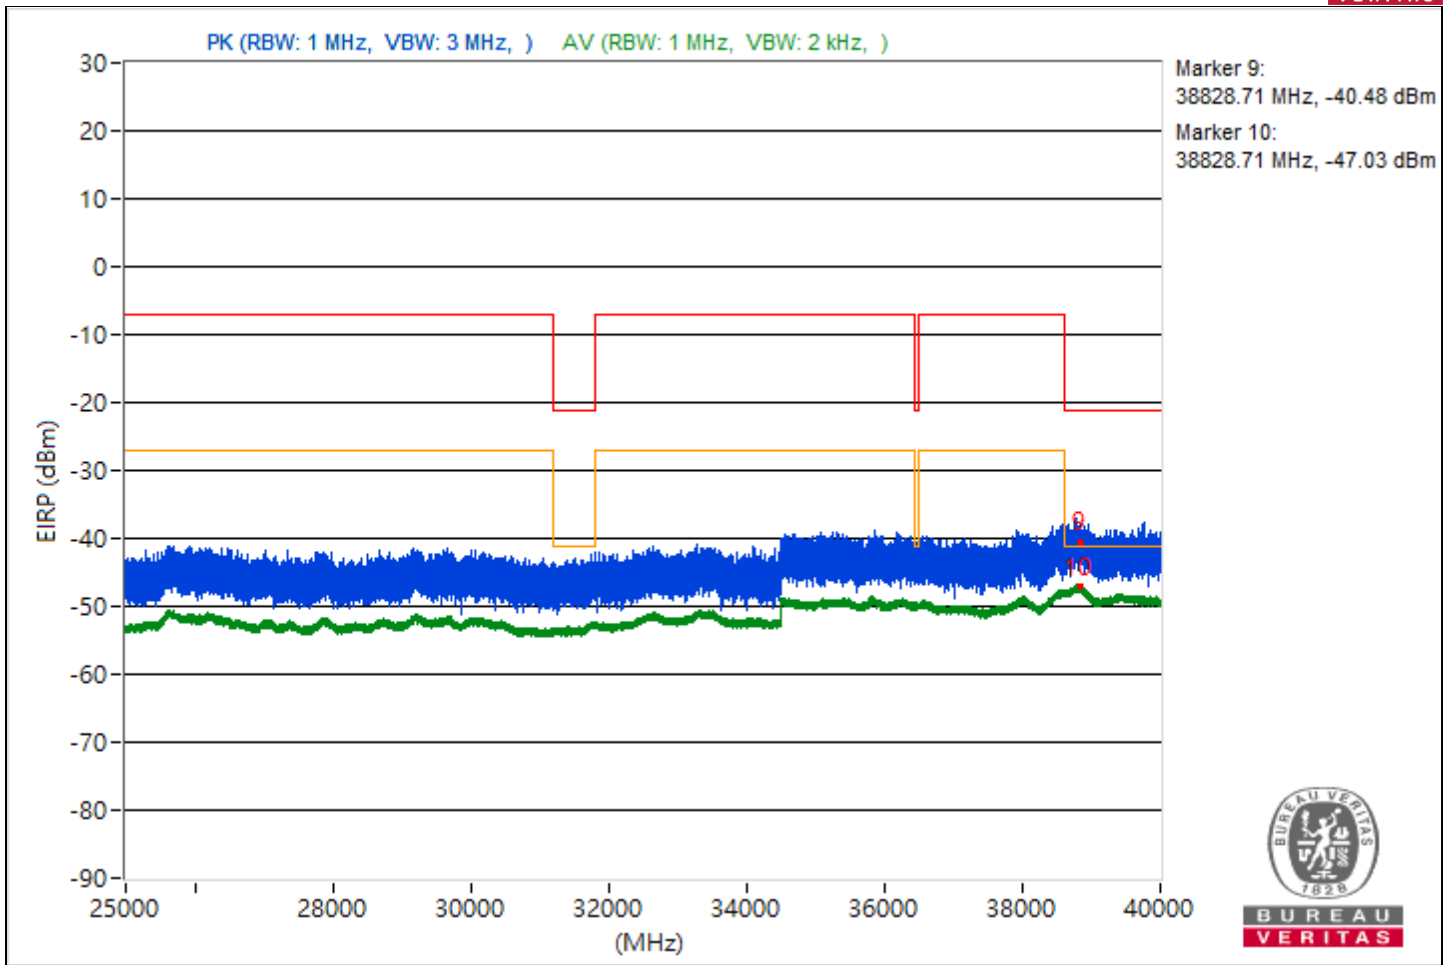



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.84	48.92 PK	74	-25.08	-58.6	-56.98	8.37	-46.34
2	5451.84	42.21 AV	54	-11.79	-64.9	-64.01	8.37	-53.05
3	11710.13	45.24 PK	74	-28.76	-61.23	-61.58	8.37	-50.02
4	11710.13	38.29 AV	54	-15.71	-67.82	-68.96	8.37	-56.97
5	18872.8	45.48 PK	74	-28.52	-61.97	-60.48	8.37	-49.78
6	18872.8	40.44 AV	54	-13.56	-66.72	-65.73	8.37	-54.82
7	23985.4	48.36 PK	74	-25.64	-58.12	-58.45	8.37	-46.9
8	23985.4	41.98 AV	54	-12.02	-65.22	-64.17	8.37	-53.28
9	38839.73	54.12 PK	74	-19.88	-52.72	-52.33	8.37	-41.14
10	38839.73	46.35 AV	54	-7.65	-60.11	-60.49	8.37	-48.91

Note: Margin value = Emission Level - Limit value

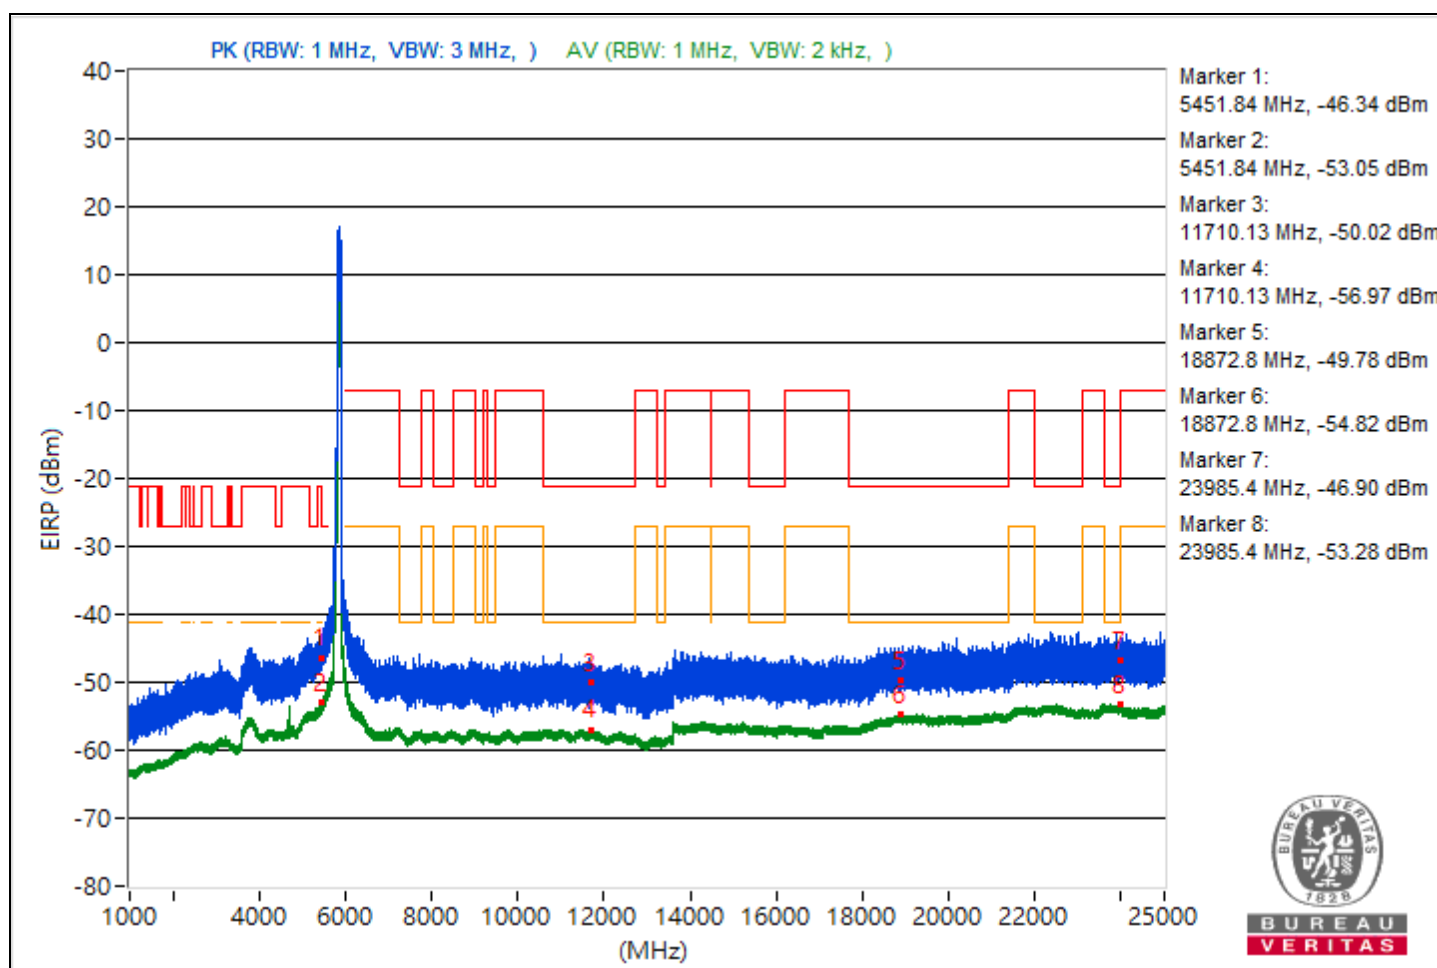

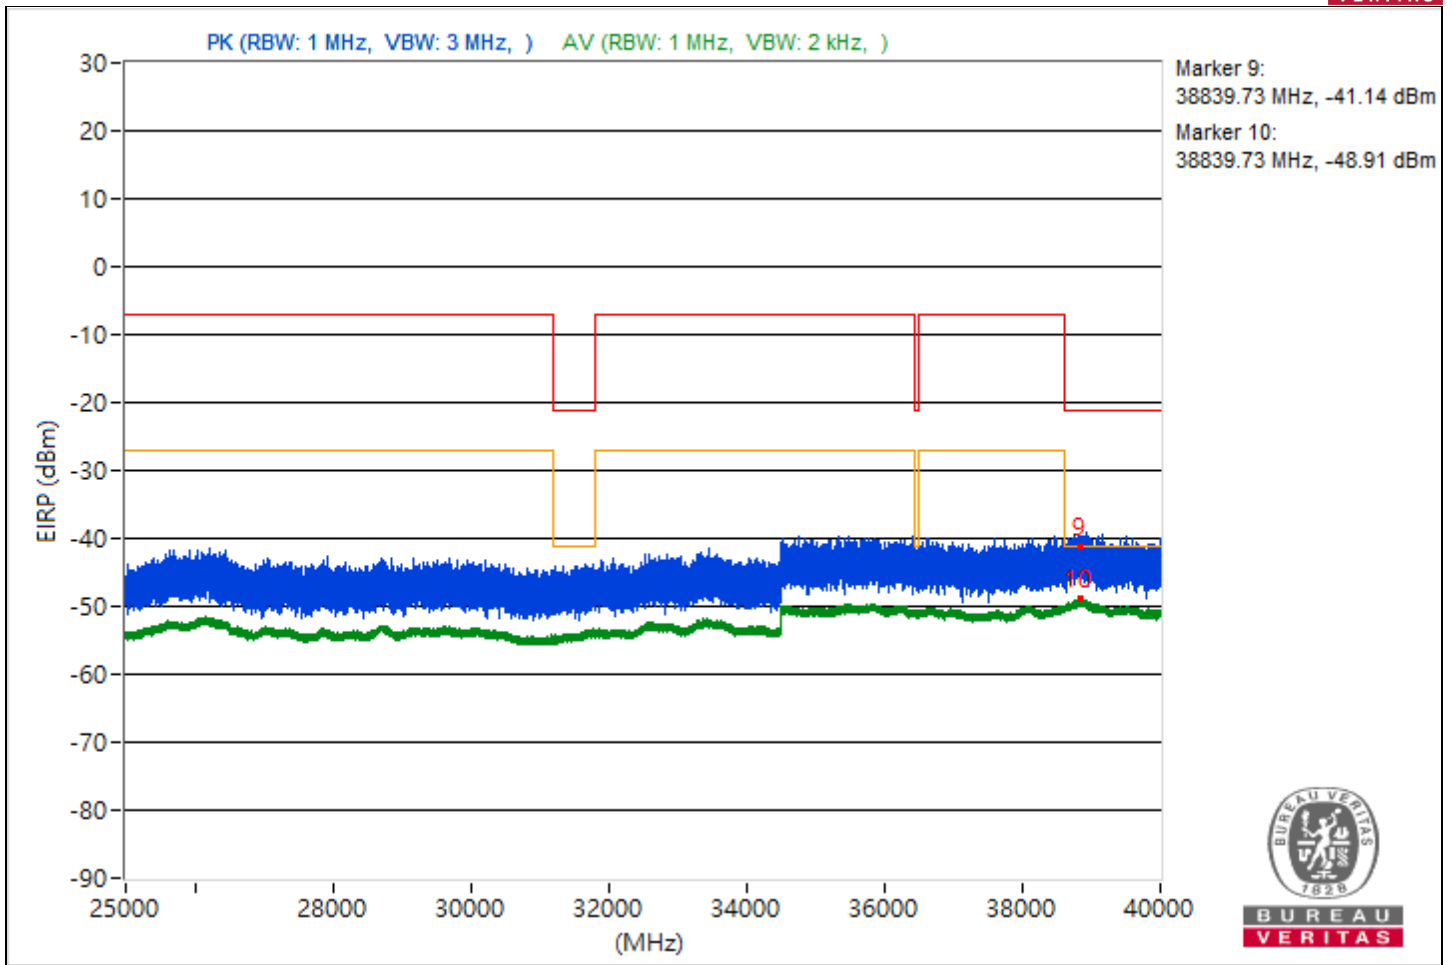



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.28	50.86 PK	74	-23.14	-54.71	-57.2	8.37	-44.4
2	5456.28	43.39 AV	54	-10.61	-63.39	-63.11	8.37	-51.87
3	11501.96	44.64 PK	74	-29.36	-62.04	-61.96	8.37	-50.62
4	11501.96	38.27 AV	54	-15.73	-67.84	-68.97	8.37	-56.99
5	19469.5	48.9 PK	74	-25.1	-56.65	-59.2	8.37	-46.36
6	19469.5	40.36 AV	54	-13.64	-66.89	-65.75	8.37	-54.9
7	23655.4	47.4 PK	74	-26.6	-59.8	-58.75	8.37	-47.86
8	23655.4	41.89 AV	54	-12.11	-65.19	-64.35	8.37	-53.37
9	38798.04	52.35 PK	74	-21.65	-54.02	-54.58	8.37	-42.91
10	38798.04	46.27 AV	54	-7.73	-60.97	-59.84	8.37	-48.99

Note: Margin value = Emission Level - Limit value

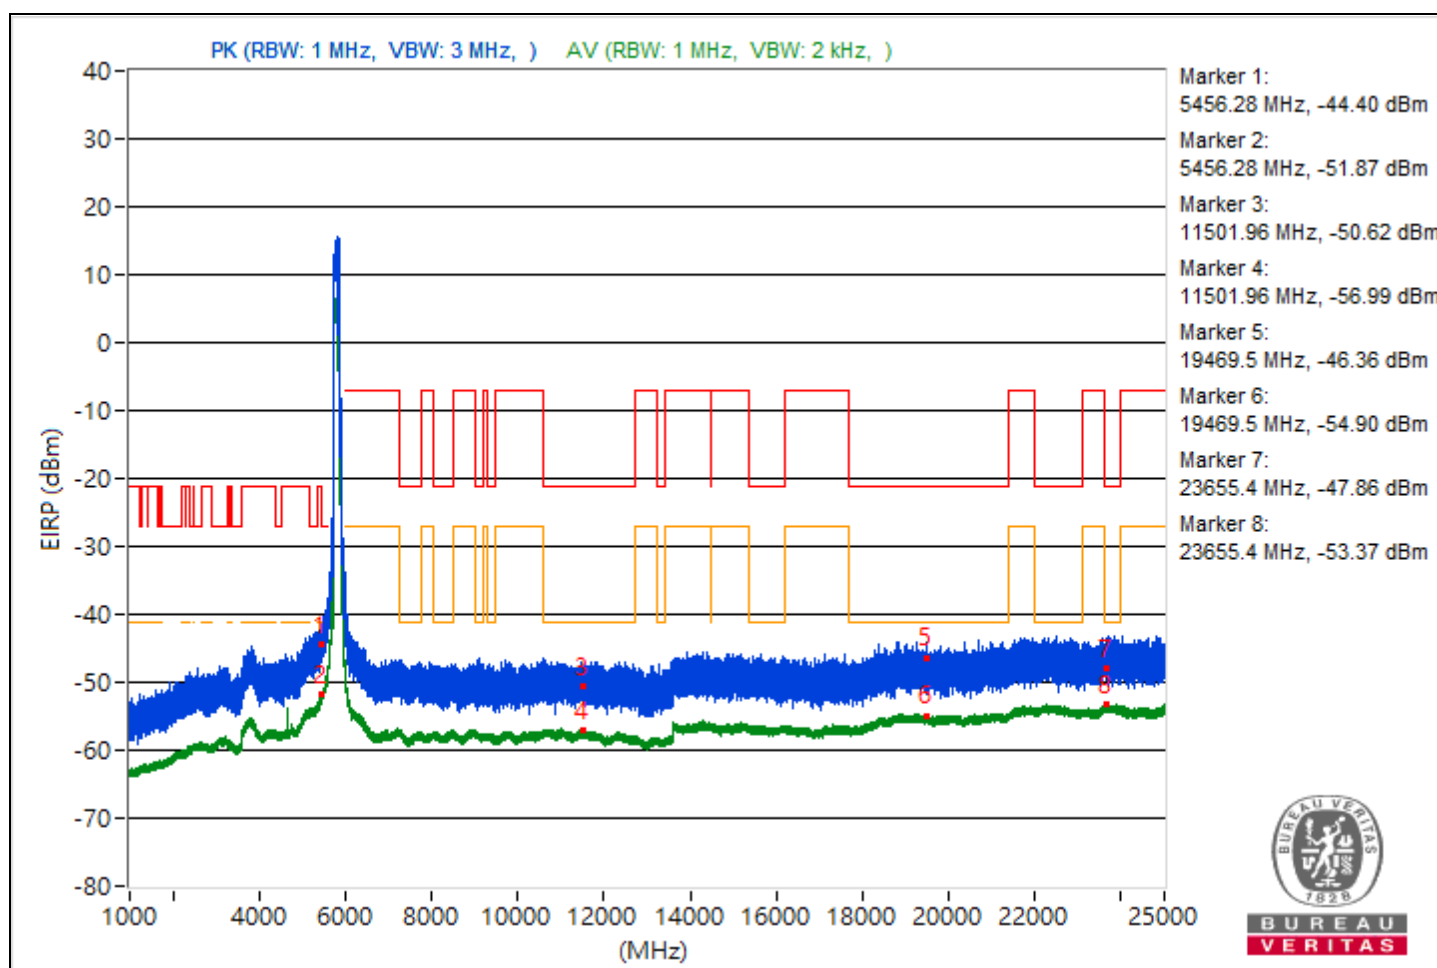


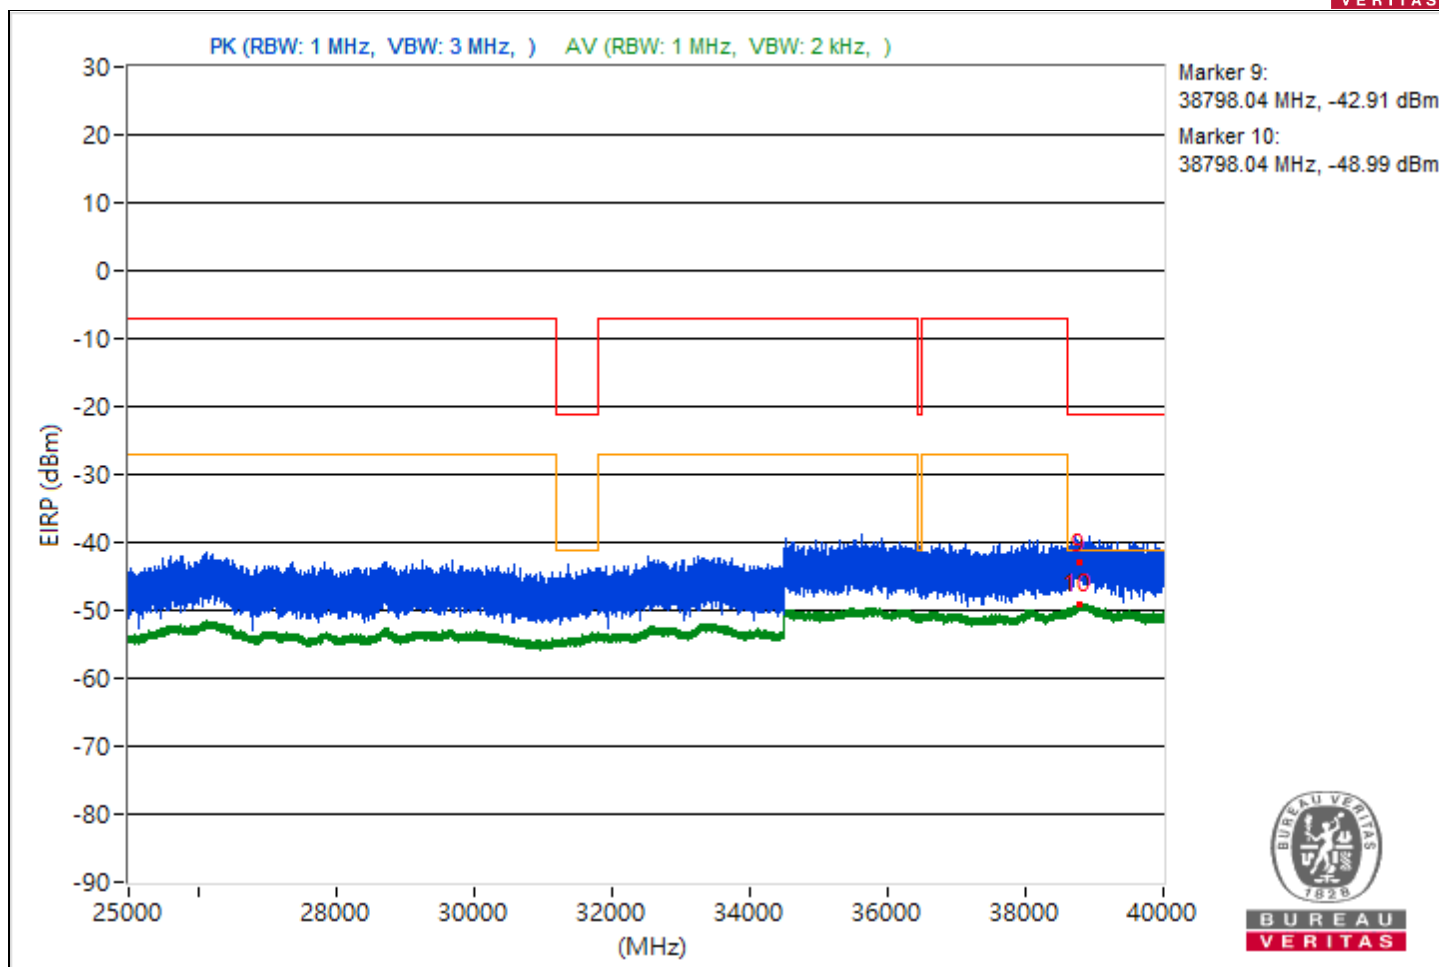


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.93	50.23 PK	74	-23.77	-58.1	-55.2	8.37	-45.03
2	5459.93	43.52 AV	54	-10.48	-62.94	-63.3	8.37	-51.74
3	10717.6	44.64 PK	74	-29.36	-62.02	-61.98	8.37	-50.62
4	10717.6	38.36 AV	54	-15.64	-67.61	-69.08	8.37	-56.9
5	18950.3	46.02 PK	74	-27.98	-60.83	-60.43	8.37	-49.24
6	18950.3	40.44 AV	54	-13.56	-66.55	-65.87	8.37	-54.82
7	22235.9	48.54 PK	74	-25.46	-57.18	-59.27	8.37	-46.72
8	22235.9	41.91 AV	54	-12.09	-64.34	-65.17	8.37	-53.35
9	38890.04	51.82 PK	74	-22.18	-55.07	-54.59	8.37	-43.44
10	38890.04	46.31 AV	54	-7.69	-60.53	-60.14	8.37	-48.95

Note: Margin value = Emission Level - Limit value

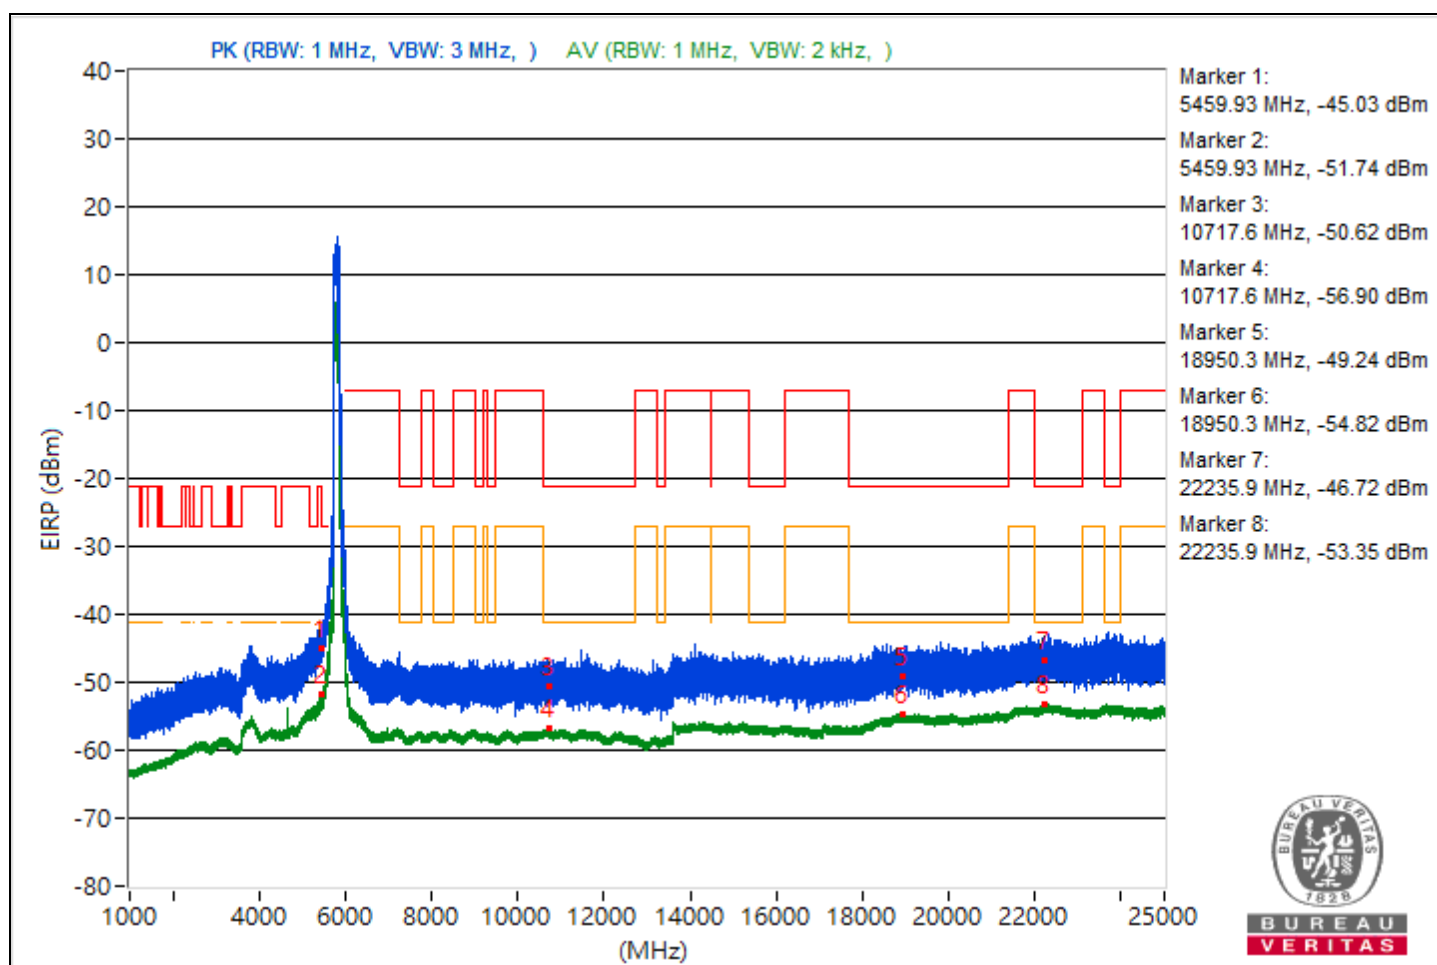

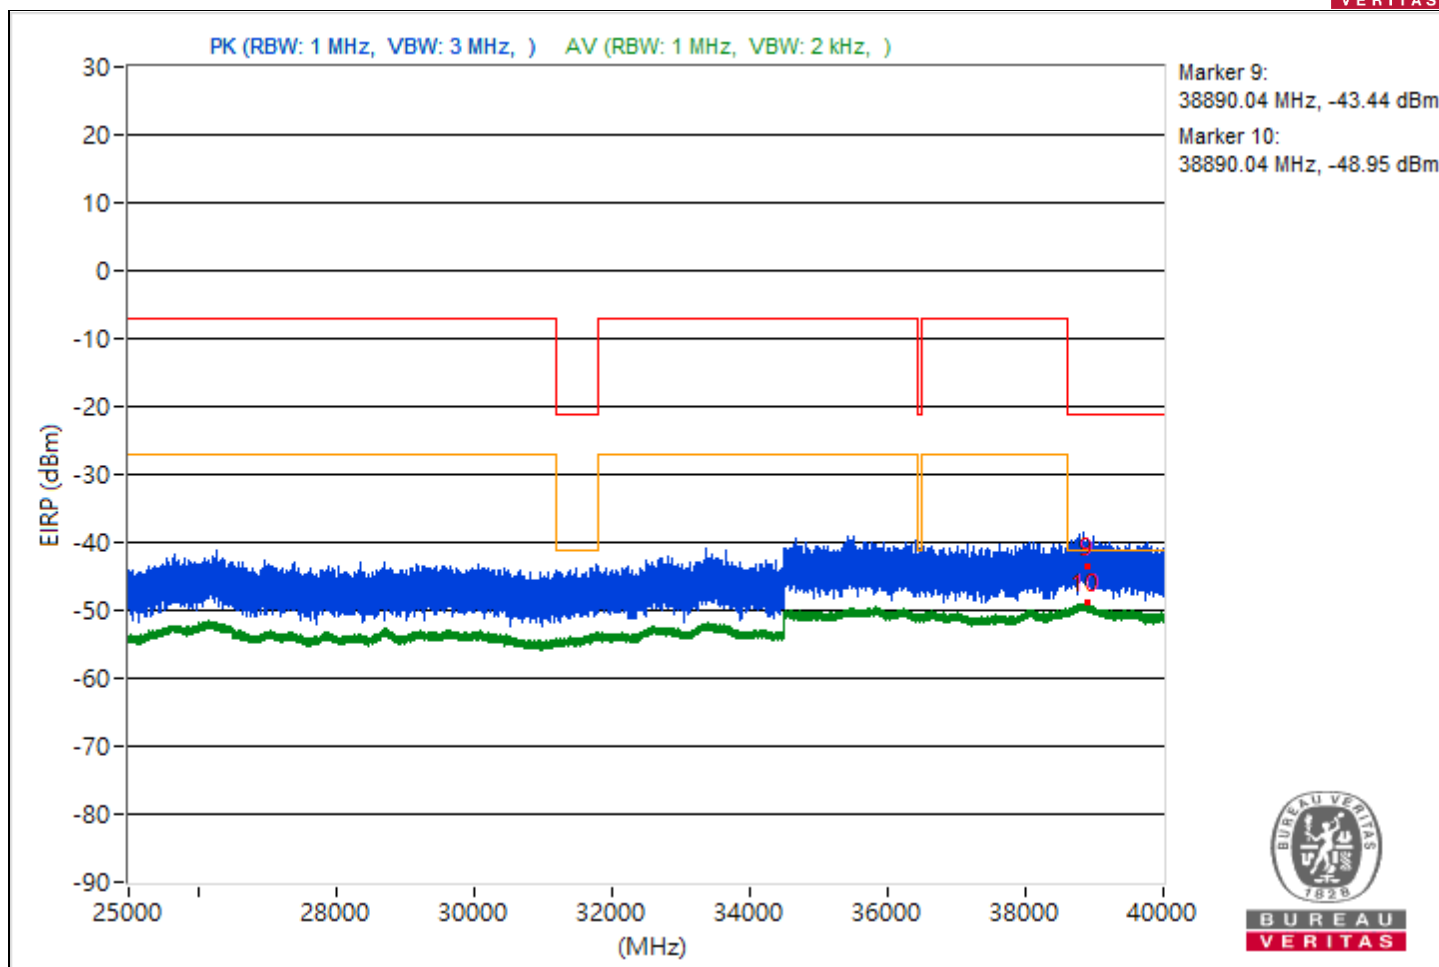


Conducted Band Edges

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5844.11	115.95 PK			3.75	7.89	11.38	20.69
2	#5616.47	61.38 PK	68.26	-6.88	-51.71	-46.37	11.38	-33.88
3	#5649.99	60.26 PK	68.26	-8	-48.26	-50.91	11.38	-35
4	#5706.2	60.81 PK	107	-46.19	-47.68	-50.41	11.38	-34.45
5	#5721.02	60.91 PK	113.18	-52.27	-50.04	-47.74	11.38	-34.35
6	#5923.48	61.9 PK	89.38	-27.48	-47.29	-48.26	11.38	-33.36
7	#5926.29	62.35 PK	88.26	-25.91	-50.34	-45.53	11.38	-32.91
8	*5843.79	110.54 AV			1.2	0.56	11.38	15.28
9	#5924.7	55.78 AV	68.48	-12.7	-54.52	-53.31	11.38	-39.48
10	#5951.79	55.85 AV	68.26	-12.41	-54.24	-53.39	11.38	-39.41

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

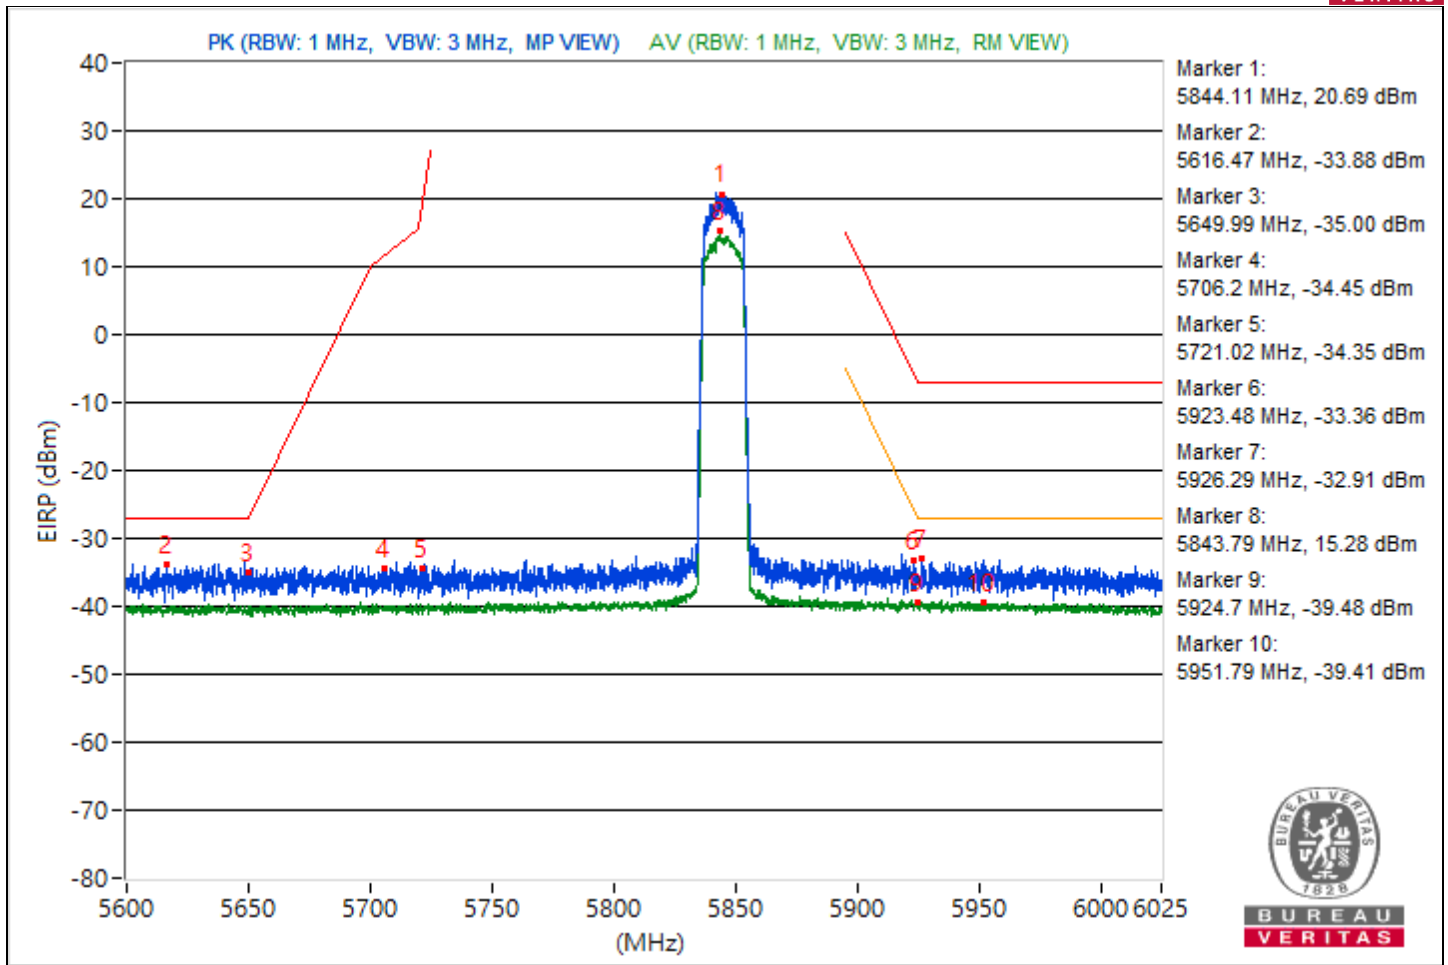


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5866.85	115.52 PK			3.52	7.38	11.38	20.26
2	#5632.83	60.99 PK	68.26	-7.27	-47.24	-50.78	11.38	-34.27
3	#5651.27	60.26 PK	69.2	-8.94	-49.83	-48.99	11.38	-35
4	#5703.97	61.32 PK	106.37	-45.05	-50.53	-46.88	11.38	-33.94
5	#5720.27	59.88 PK	111.49	-51.61	-48.51	-51.54	11.38	-35.38
6	#5923.96	61.81 PK	89.03	-27.22	-47.97	-47.72	11.38	-33.45
7	#5983.51	61.46 PK	88.26	-26.8	-51.35	-46.37	11.38	-33.8
8	*5866.05	109.85 AV			-0.09	0.48	11.38	14.59
9	#5924.01	55.29 AV	68.99	-13.7	-55.04	-53.76	11.38	-39.97
10	#5930.54	56.34 AV	68.26	-11.92	-52.67	-54.08	11.38	-38.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

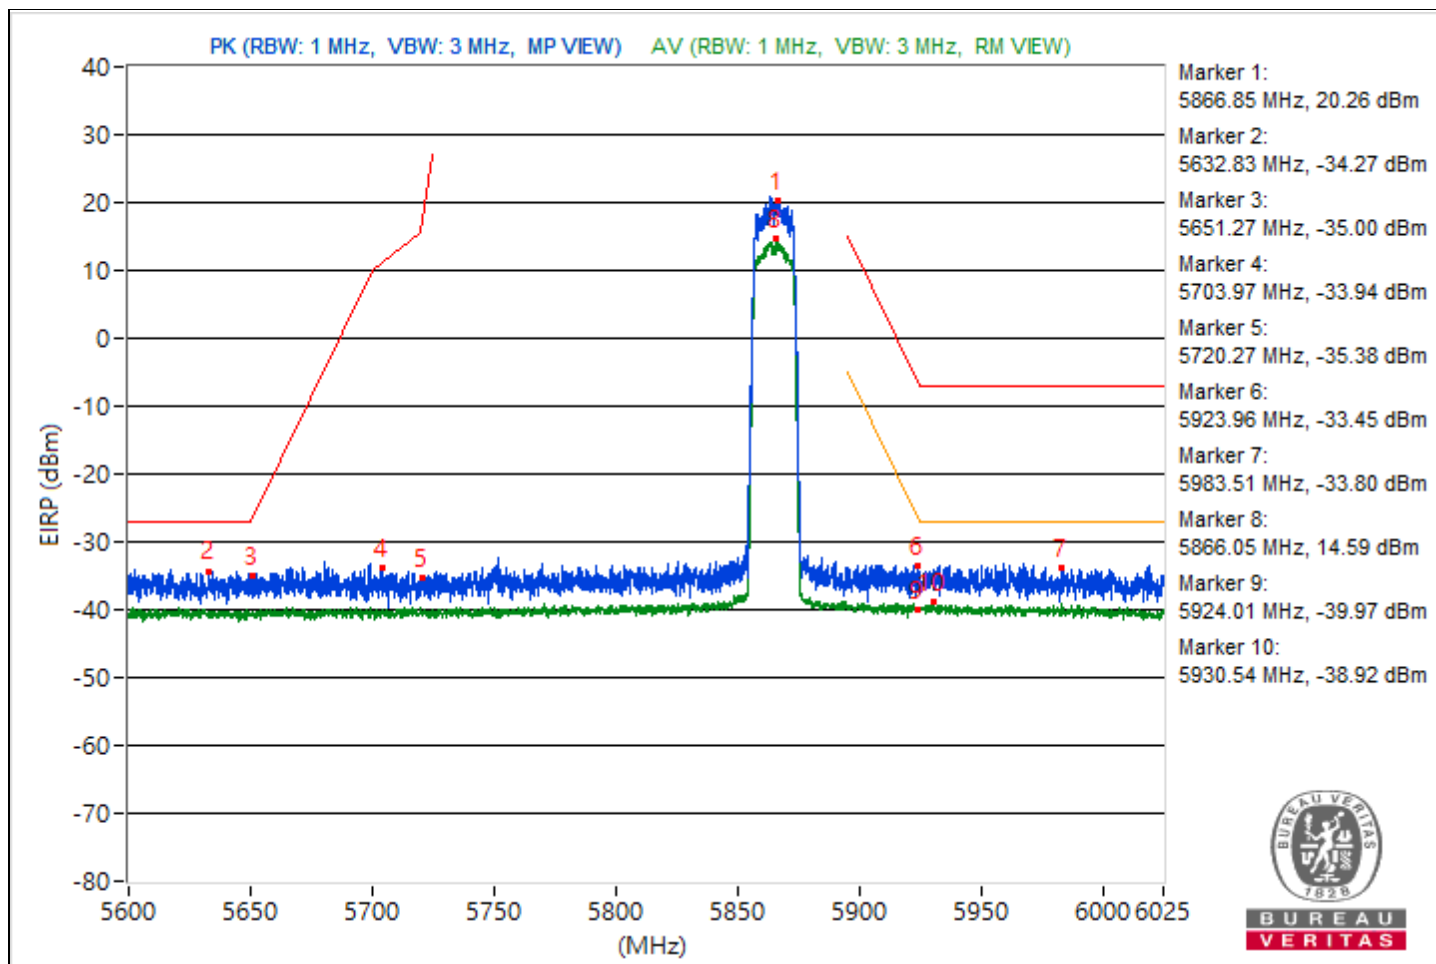


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5883.1	115.56 PK			7	4.45	11.38	20.3
2	#5611	61.39 PK	68.26	-6.87	-49.91	-47.07	11.38	-33.87
3	#5650.42	60.13 PK	68.57	-8.44	-48.14	-51.56	11.38	-35.13
4	#5705.82	61.02 PK	106.89	-45.87	-50.76	-47.21	11.38	-34.24
5	#5721.5	61.74 PK	114.27	-52.53	-50.94	-46.14	11.38	-33.52
6	#5897.13	87.08 PK	108.7	-21.62	-20.44	-26.96	11.38	-8.18
7	#5928.84	62.66 PK	88.26	-25.6	-45.61	-49.03	11.38	-32.6
8	*5886.13	110.48 AV			0.23	1.36	11.38	15.22
9	#5895	80.95 AV	90.26	-9.31	-28.84	-28.57	11.38	-14.31
10	#5926.35	55.92 AV	68.26	-12.34	-52.72	-55.06	11.38	-39.34

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

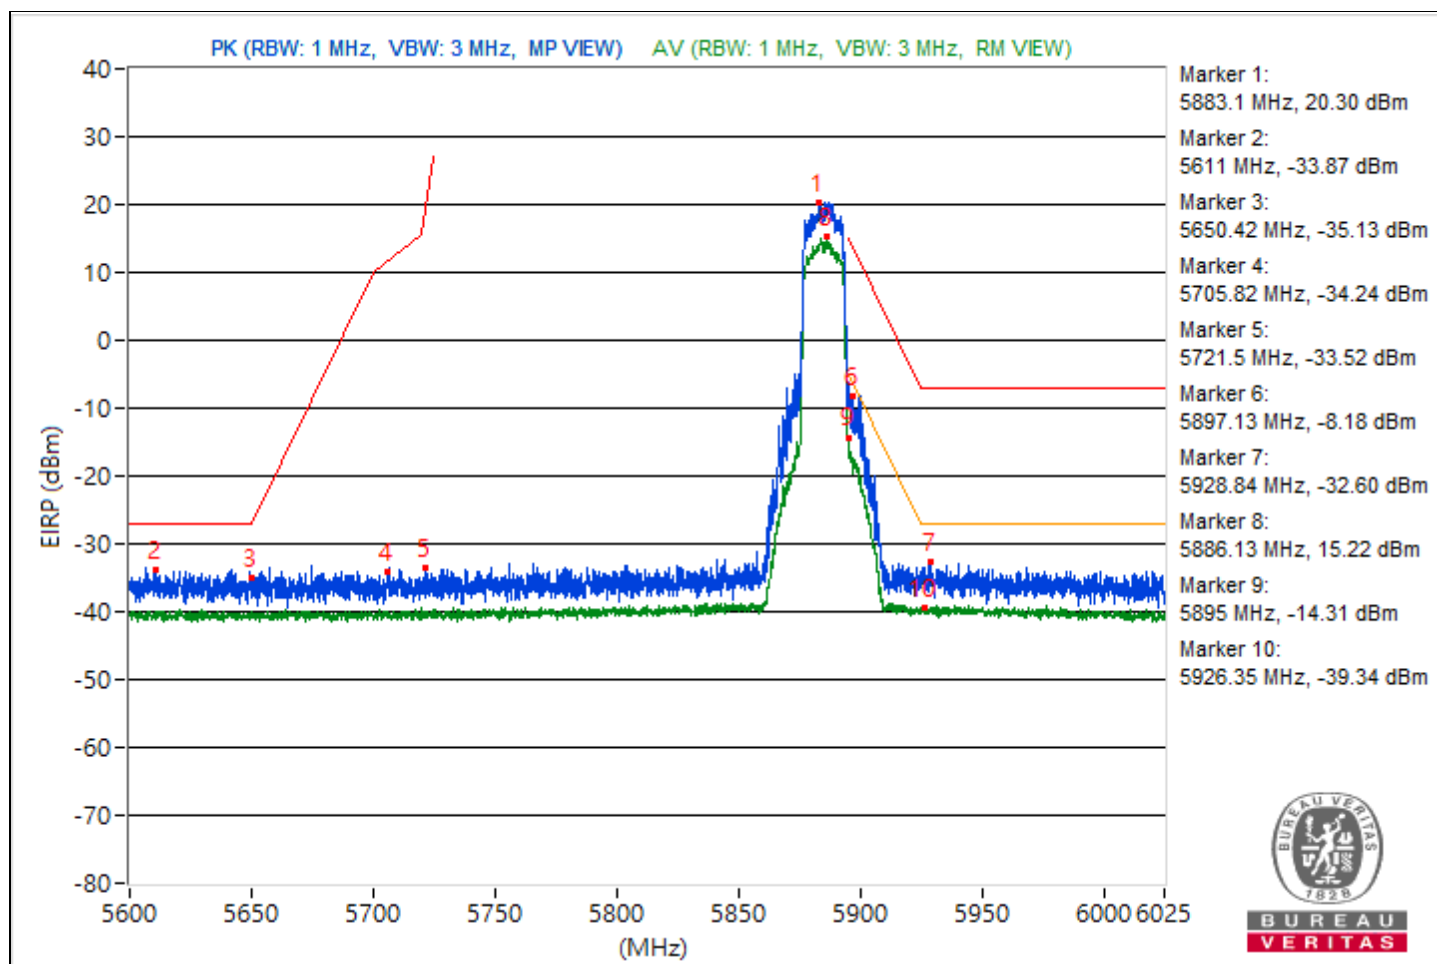


RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5842.83	116.41 PK			7.82	11.11	8.37	21.15
2	#5627.36	59.64 PK	68.26	-8.62	-49.02	-45.63	8.37	-35.62
3	#5651.74	58.57 PK	69.55	-10.98	-50.01	-46.74	8.37	-36.69
4	#5704.23	58.72 PK	106.44	-47.72	-46.43	-50.19	8.37	-36.54
5	#5720.54	58.98 PK	112.09	-53.11	-47.09	-48.31	8.37	-36.28
6	#5924.54	60.82 PK	88.6	-27.78	-44.92	-46.97	8.37	-34.44
7	#5945.9	59.89 PK	88.26	-28.37	-49.22	-45.19	8.37	-35.37
8	*5846.5	110.39 AV			3.75	3.76	8.37	15.13
9	#5924.91	53.46 AV	68.32	-14.86	-52.92	-53.46	8.37	-41.8
10	#5929.27	53.64 AV	68.26	-14.62	-53.61	-52.47	8.37	-41.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

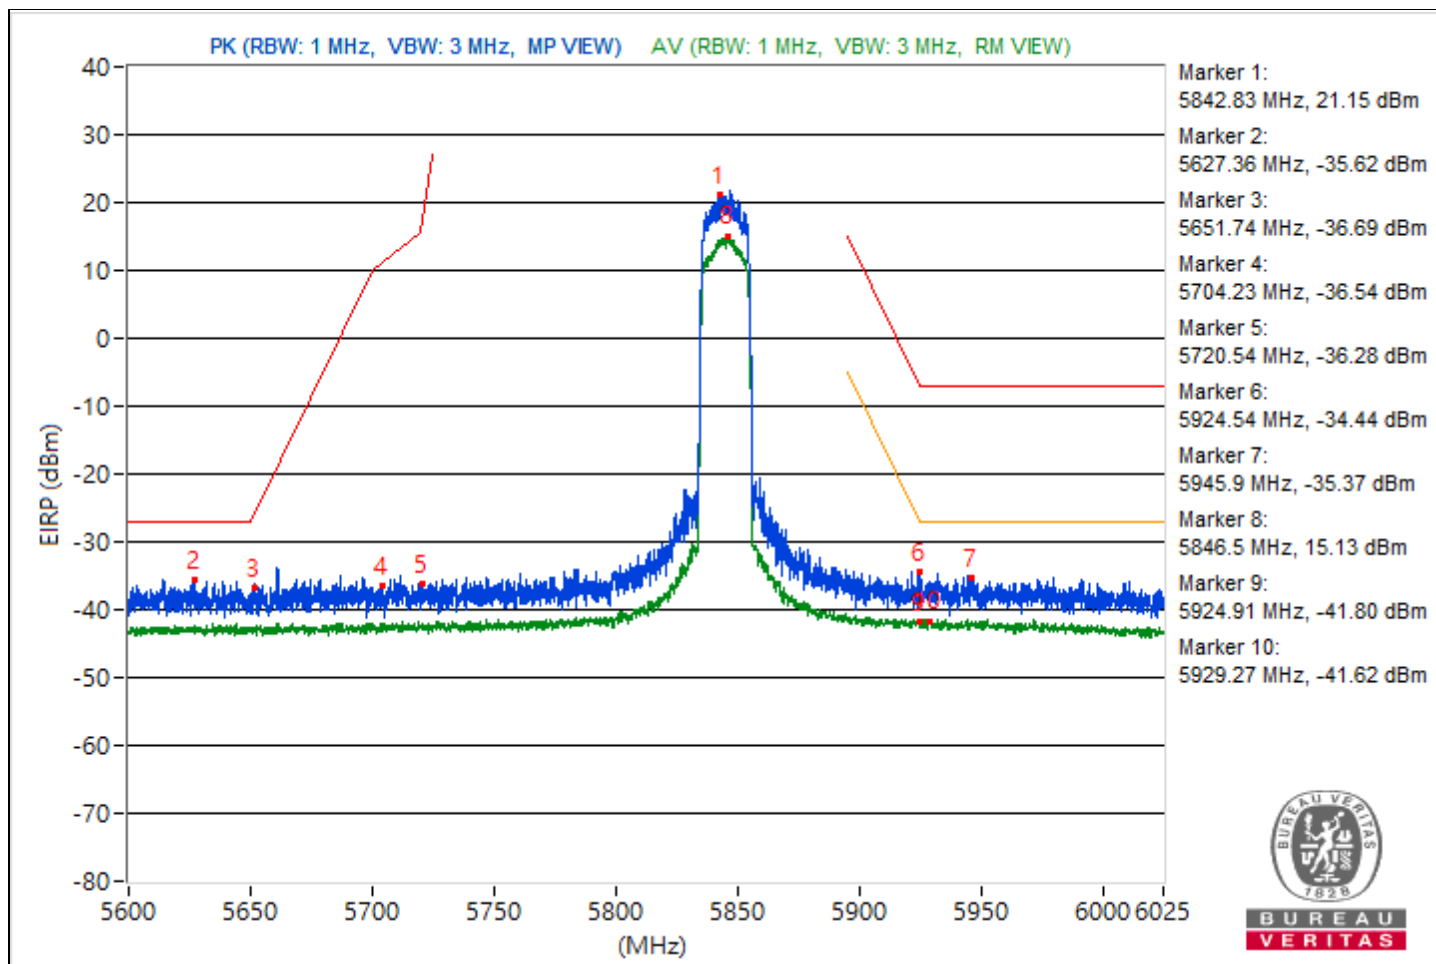


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5866	116.02 PK			10.73	7.42	8.37	20.76
2	#5602.12	59.35 PK	68.26	-8.91	-45.68	-49.88	8.37	-35.91
3	#5650.84	57.49 PK	68.88	-11.39	-48.05	-50.62	8.37	-37.77
4	#5705.61	59.56 PK	106.83	-47.27	-46.71	-47.48	8.37	-35.7
5	#5720.17	57.27 PK	111.24	-53.97	-50.84	-48.27	8.37	-37.99
6	#5922.89	59.34 PK	89.8	-30.46	-46.6	-48.14	8.37	-35.92
7	#5933.73	60.88 PK	88.26	-27.38	-44.83	-46.94	8.37	-34.38
8	*5866.21	110.03 AV			2.75	3.94	8.37	14.77
9	#5923.37	54.19 AV	69.45	-15.26	-52	-52.94	8.37	-41.07
10	#5932.35	53.84 AV	68.26	-14.42	-52.14	-53.59	8.37	-41.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

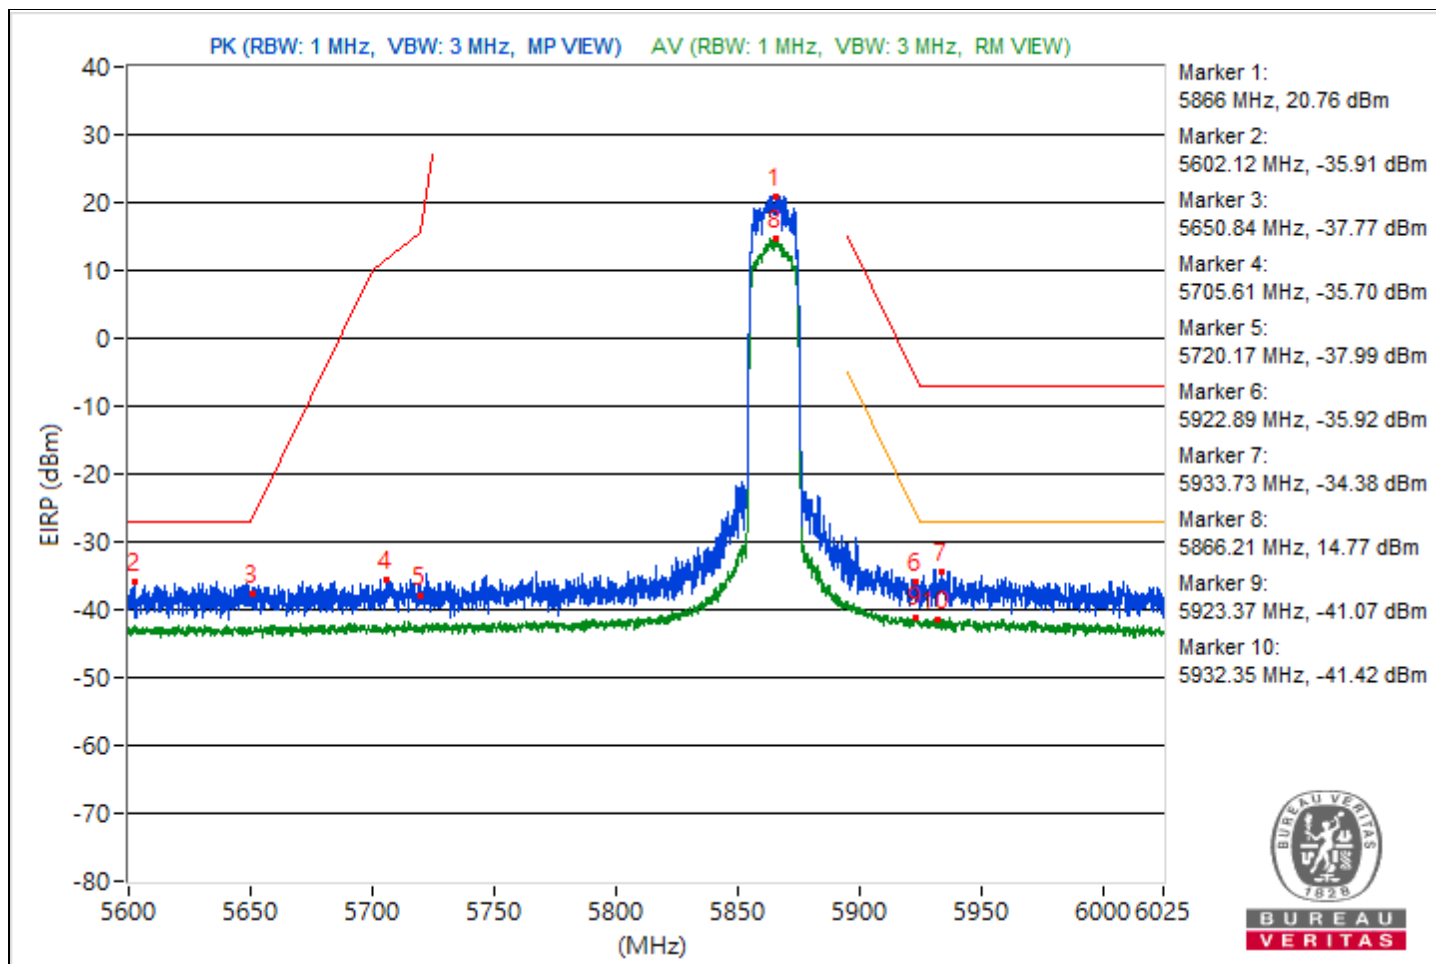



RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5895	100.91 PK	110.26	-9.35	-6.06	-5.42	8.37	5.65
2	#5895	89.54 AV	90.26	-0.72	-17.56	-16.69	8.37	-5.72



Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

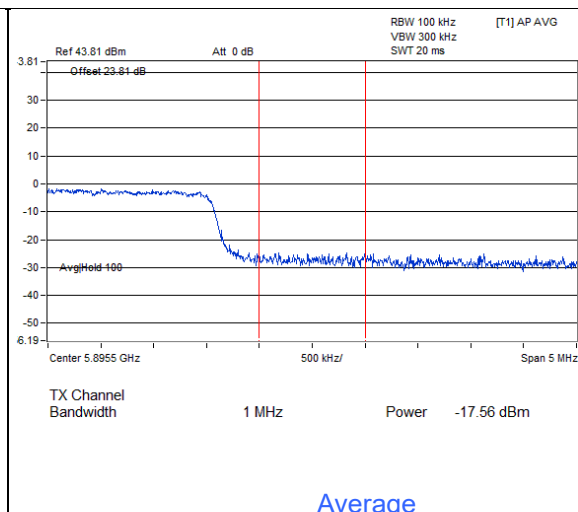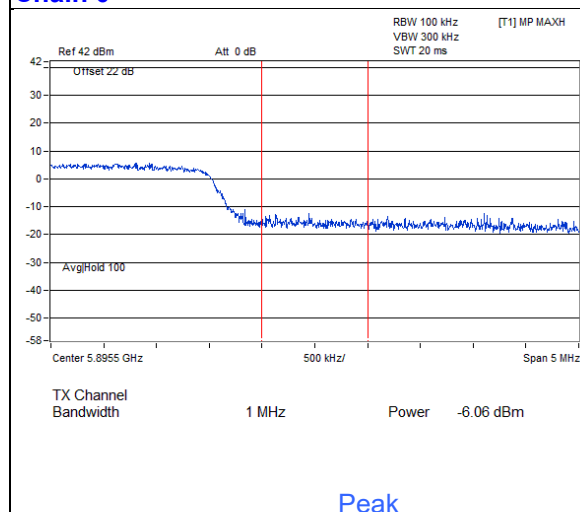

Chain 1

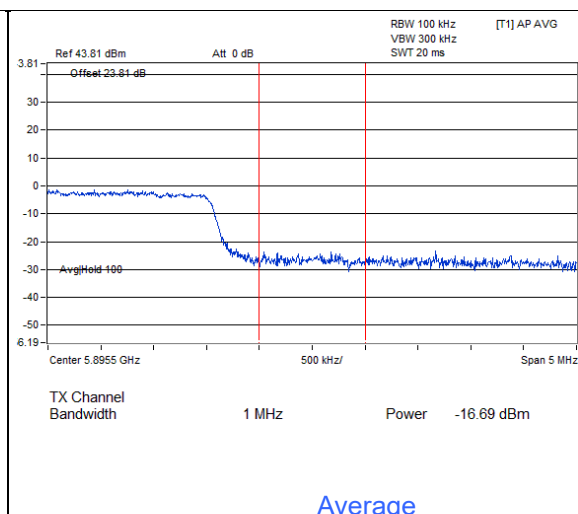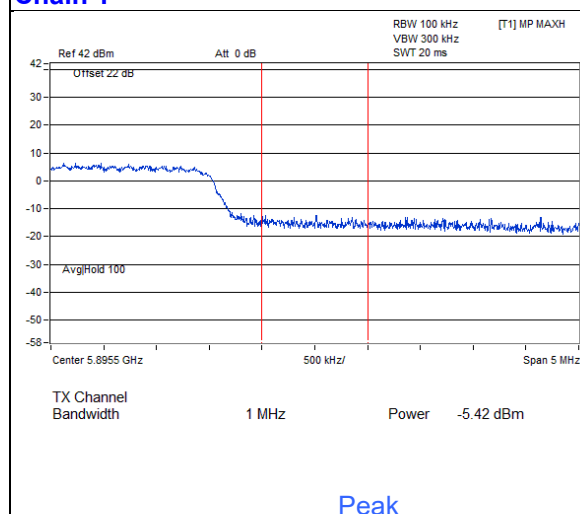


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5832.37	118.78 PK			13.97	8.93	8.37	23.52
2	#5610.78	59.68 PK	68.26	-8.58	-45.7	-48.74	8.37	-35.58
3	#5651.9	59.54 PK	69.67	-10.13	-45.34	-50.12	8.37	-35.72
4	#5700.14	59.64 PK	105.3	-45.66	-45.74	-48.81	8.37	-35.62
5	#5720.06	58.44 PK	111	-52.56	-47.82	-48.62	8.37	-36.82
6	#5923.16	61.86 PK	89.61	-27.75	-44.82	-44.74	8.37	-33.4
7	#5931.29	61.56 PK	88.26	-26.7	-43.98	-46.54	8.37	-33.7
8	*5836.3	109.58 AV			1.34	4.11	8.37	14.32
9	#5924.33	54.91 AV	68.75	-13.84	-51.77	-51.7	8.37	-40.35
10	#5928.15	54.72 AV	68.26	-13.54	-51.41	-52.49	8.37	-40.54

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

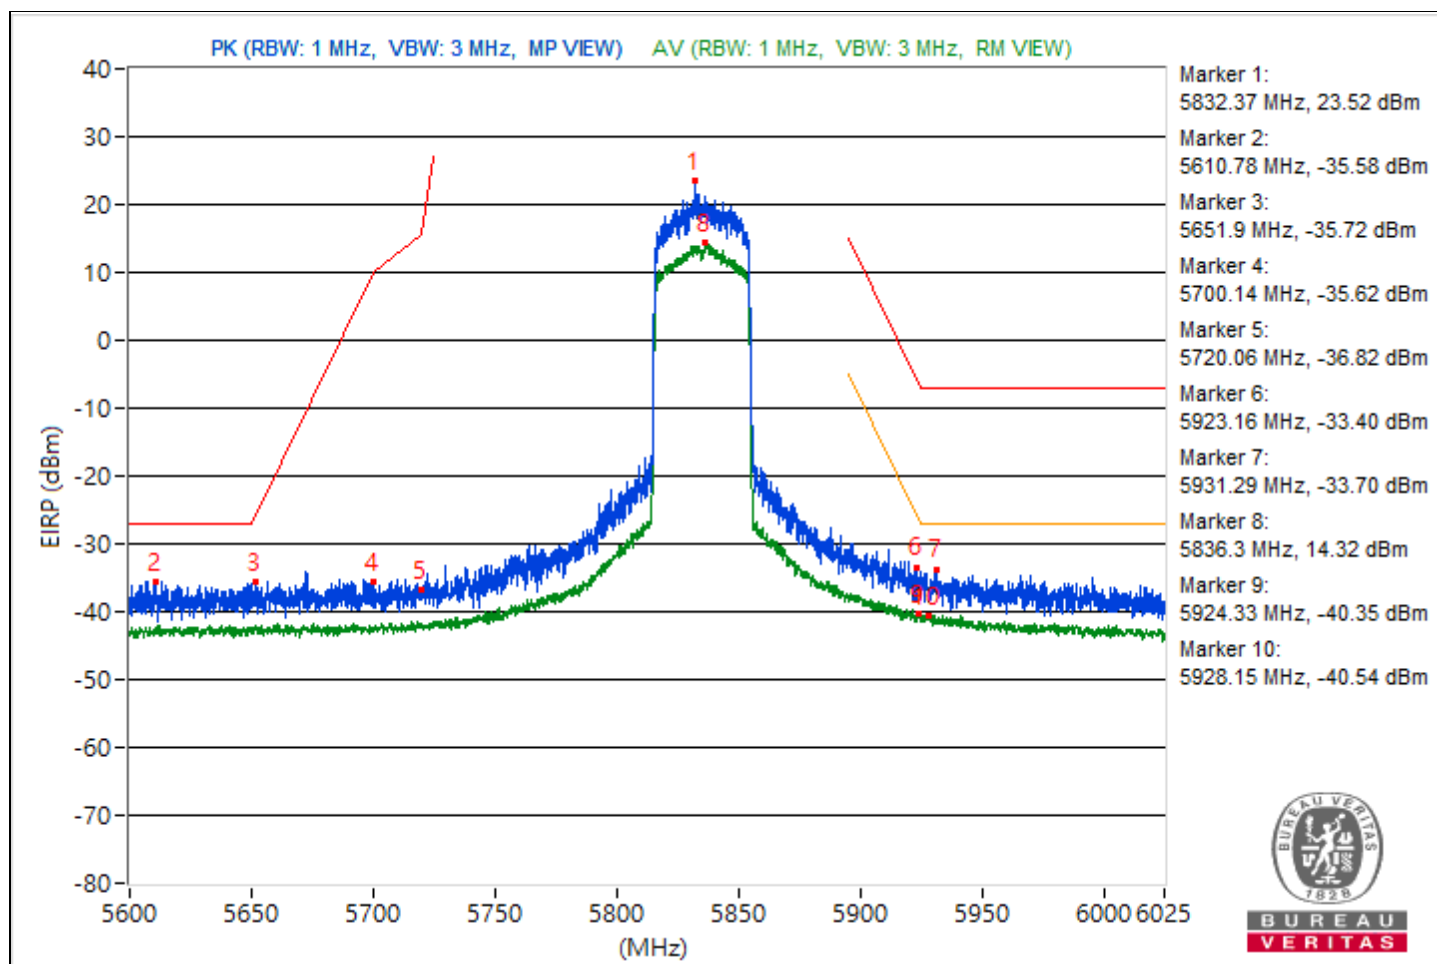


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5870.83	117.64 PK			6.99	13.05	8.37	22.38
2	#5628.69	59.57 PK	68.26	-8.69	-45.14	-50.66	8.37	-35.69
3	#5653.87	58.56 PK	71.12	-12.56	-50.08	-46.71	8.37	-36.7
4	#5705.98	59.91 PK	106.94	-47.03	-45.34	-48.8	8.37	-35.35
5	#5720.38	57.63 PK	111.73	-54.1	-49.57	-48.52	8.37	-37.63
6	#5895	94.71 PK	110.26	-15.55	-12.19	-11.69	8.37	-0.55
7	#5925.6	62.49 PK	88.26	-25.77	-45.74	-42.98	8.37	-32.77
8	*5877.37	110 AV			3.4	3.32	8.37	14.74
9	#5895	89.55 AV	90.26	-0.71	-16.91	-17.28	8.37	-5.71
10	#5932.72	55.12 AV	68.26	-13.14	-51.36	-51.69	8.37	-40.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

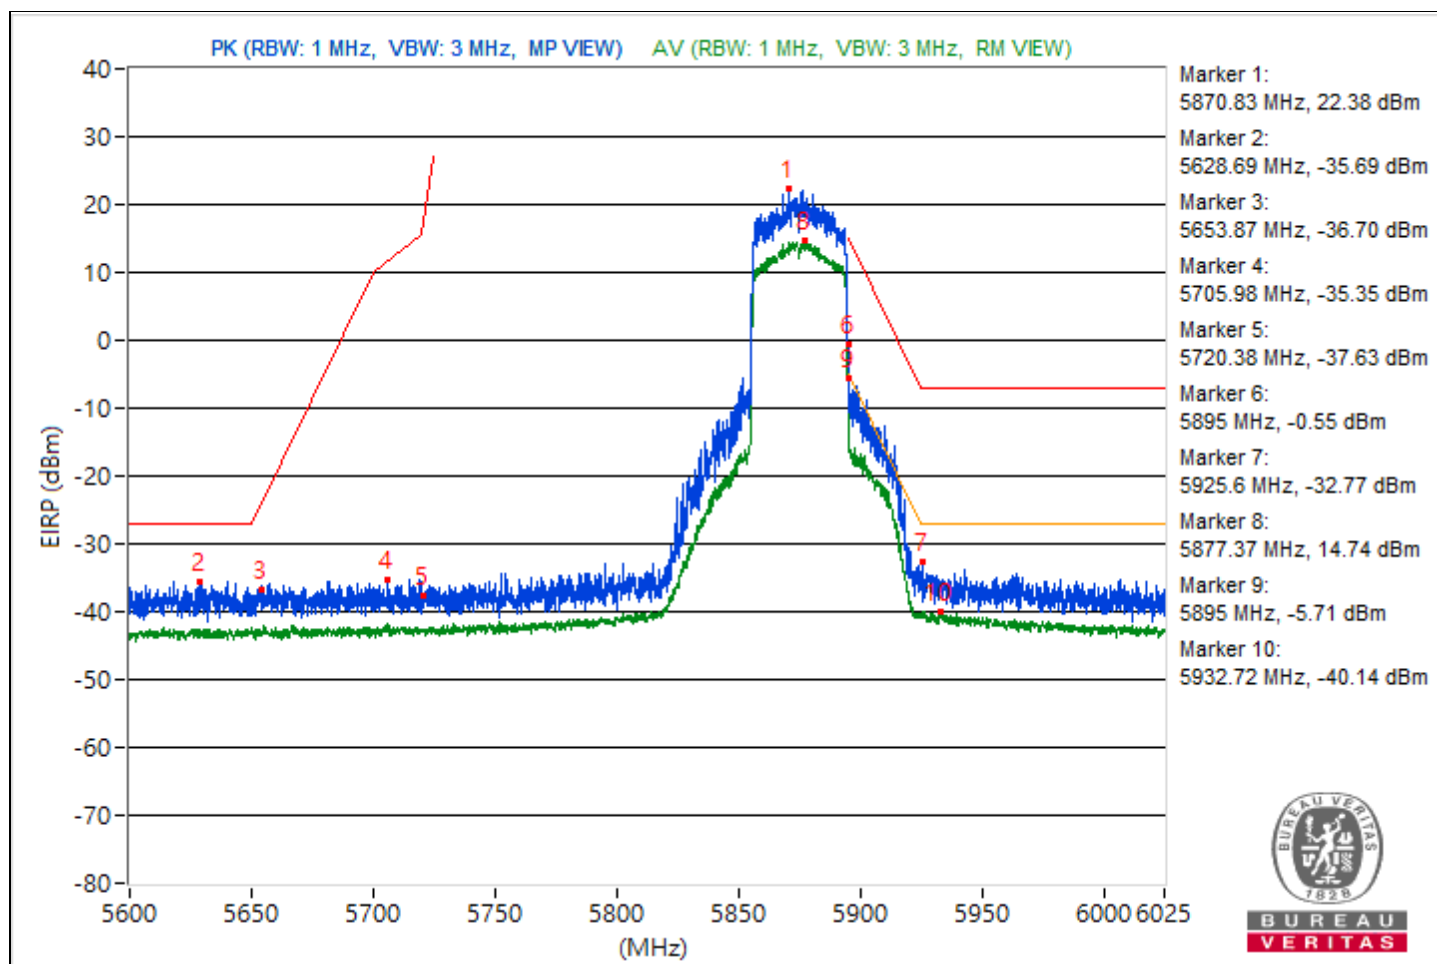


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5858.03	114.58 PK			9.65	5.05	8.37	19.32
2	#5642.13	60.54 PK	68.26	-7.72	-48.53	-44.56	8.37	-34.72
3	#5650.1	59.08 PK	68.33	-9.25	-49.69	-46.15	8.37	-36.18
4	#5701.89	58.53 PK	105.79	-47.26	-50.7	-46.5	8.37	-36.73
5	#5720.33	59.21 PK	111.61	-52.4	-47.14	-47.74	8.37	-36.05
6	#5907.81	85.04 PK	100.87	-15.83	-19.55	-25.62	8.37	-10.22
7	#5925.28	64.34 PK	88.26	-23.92	-42.31	-42.29	8.37	-30.92
8	*5852.4	108.05 AV			1.32	1.49	8.37	12.79
9	#5895	87.93 AV	90.26	-2.33	-18.17	-19.33	8.37	-7.33
10	#5927.73	57.56 AV	68.26	-10.7	-48.15	-50.25	8.37	-37.7

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

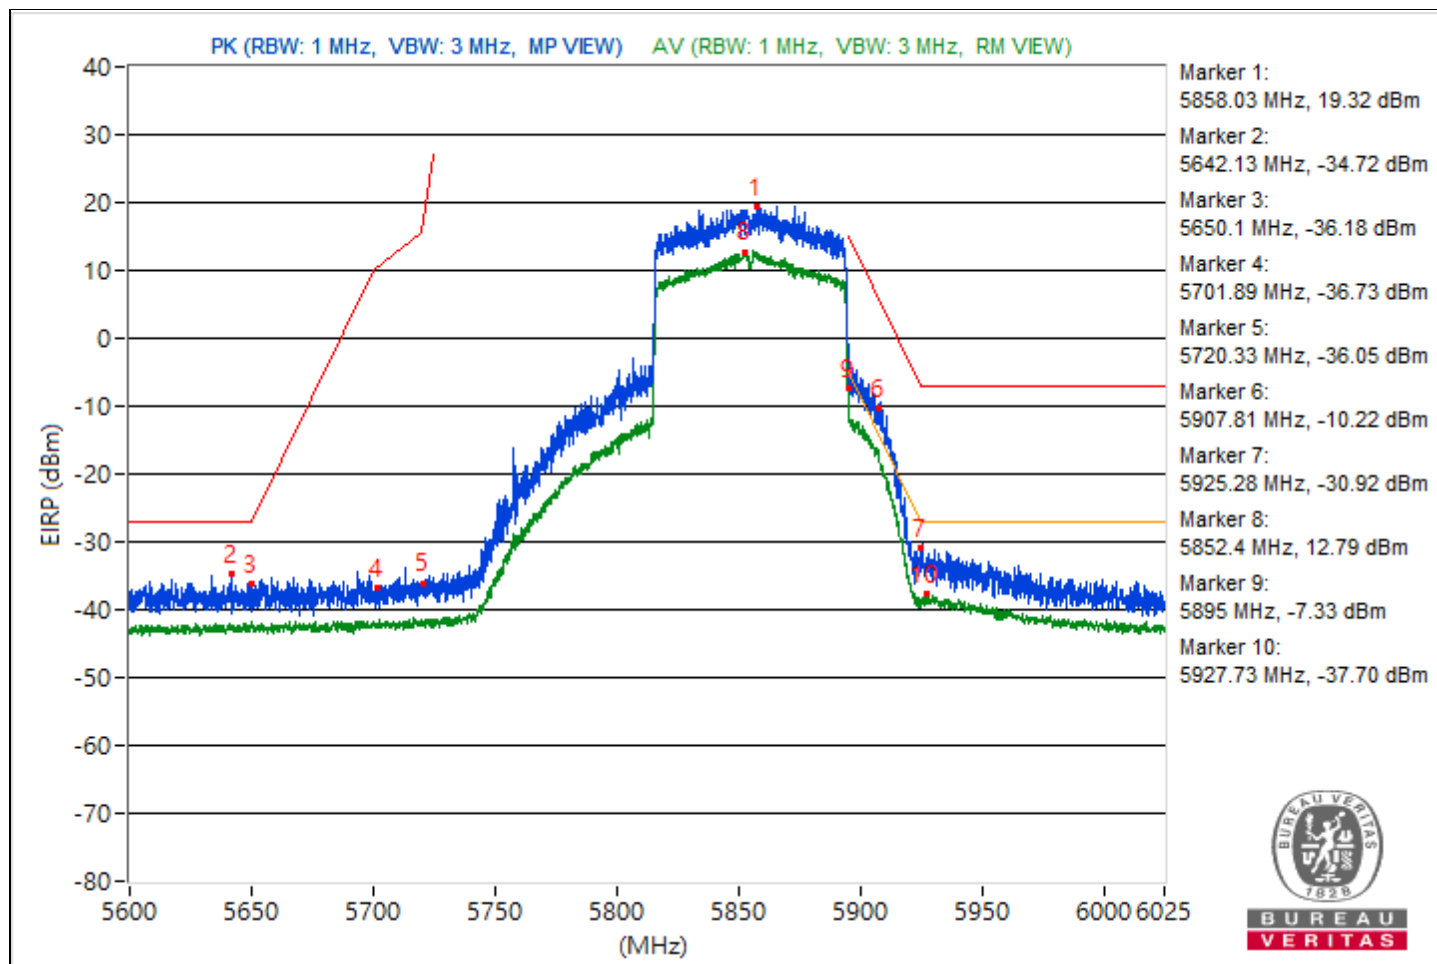


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 68% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5812.82	112.71 PK			6.85	5.11	8.37	17.45
2	#5639.47	64.29 PK	68.26	-3.97	-40.47	-45.71	8.37	-30.97
3	#5650.47	63.71 PK	68.61	-4.9	-45.02	-41.52	8.37	-31.55
4	#5701.04	68.08 PK	105.55	-37.47	-36.95	-41.16	8.37	-27.18
5	#5720.49	66.61 PK	111.97	-45.36	-38.93	-41.5	8.37	-28.65
6	#5908.34	86.11 PK	100.48	-14.37	-18.34	-25.13	8.37	-9.15
7	#5967.52	70.1 PK	88.26	-18.16	-35.19	-38.51	8.37	-25.16
8	*5812.39	104.88 AV			-2.06	-1.48	8.37	9.62
9	#5906.43	77.77 AV	81.88	-4.11	-29.11	-28.65	8.37	-17.49
10	#5931.23	61.6 AV	68.26	-6.66	-44.5	-45.66	8.37	-33.66

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

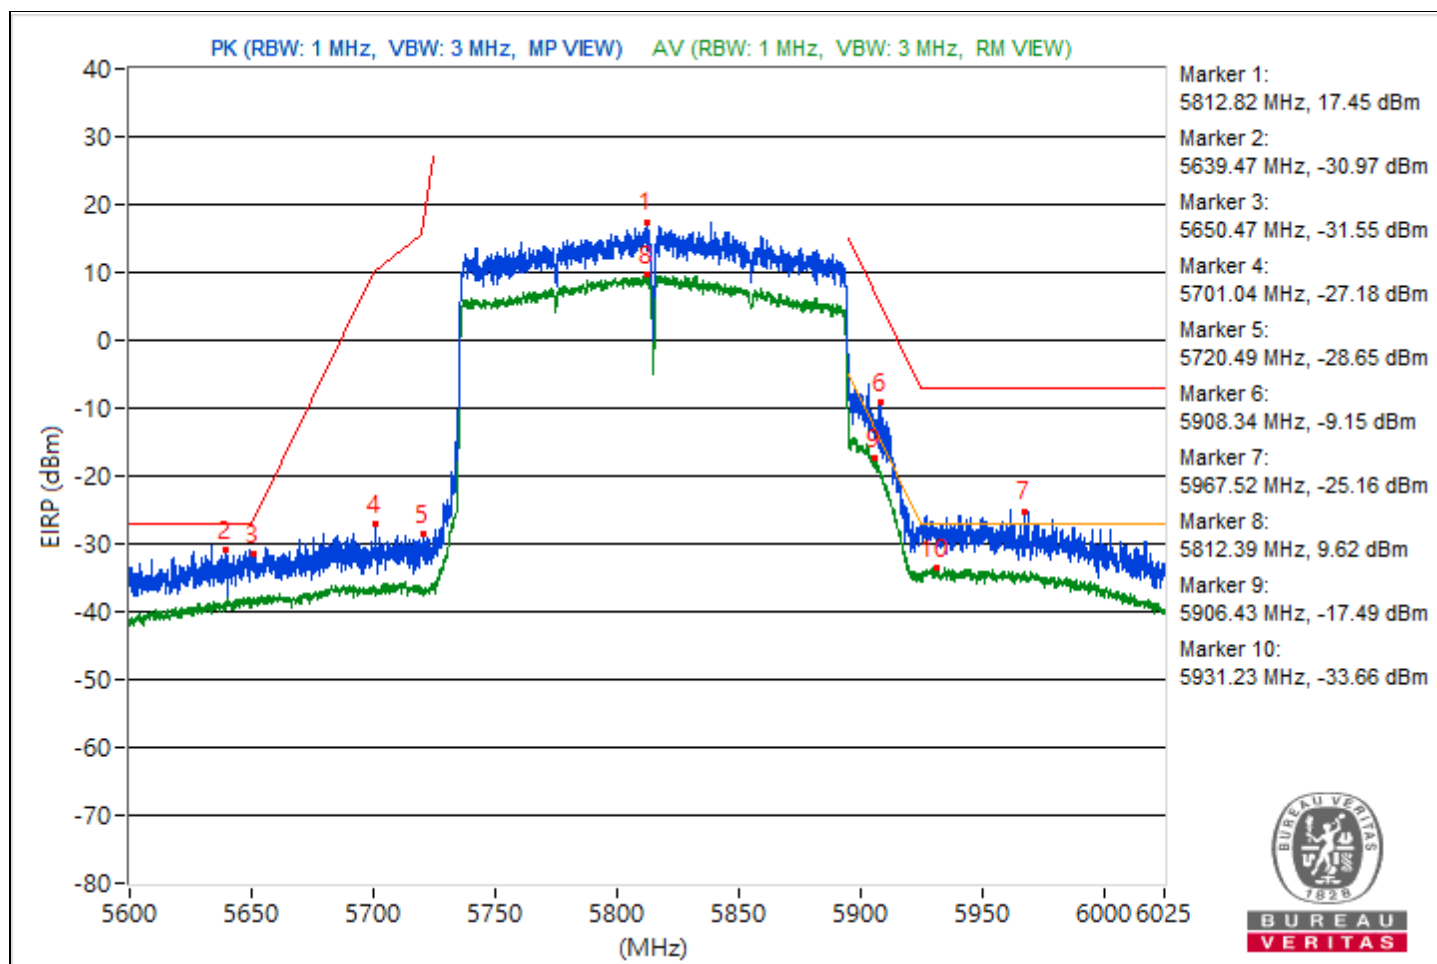


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5836.67	117.89 PK			11.4	11.11	8.37	22.63
2	#5606.85	59.49 PK	68.26	-8.77	-49.01	-45.86	8.37	-35.77
3	#5649.99	58.68 PK	68.26	-9.58	-48.9	-47.19	8.37	-36.58
4	#5702.85	59.76 PK	106.06	-46.3	-46.01	-47.97	8.37	-35.5
5	#5720.01	58.27 PK	110.88	-52.61	-49.08	-47.77	8.37	-36.99
6	#5922.1	60.06 PK	90.39	-30.33	-45.33	-48.34	8.37	-35.2
7	#5955.94	60.1 PK	88.26	-28.16	-45.56	-47.81	8.37	-35.16
8	*5836.88	109.6 AV			2.69	3.21	8.37	14.34
9	#5923.96	50.61 AV	69.03	-18.42	-55.45	-56.7	8.37	-44.65
10	#5925.87	50.88 AV	68.26	-17.38	-56.13	-55.42	8.37	-44.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

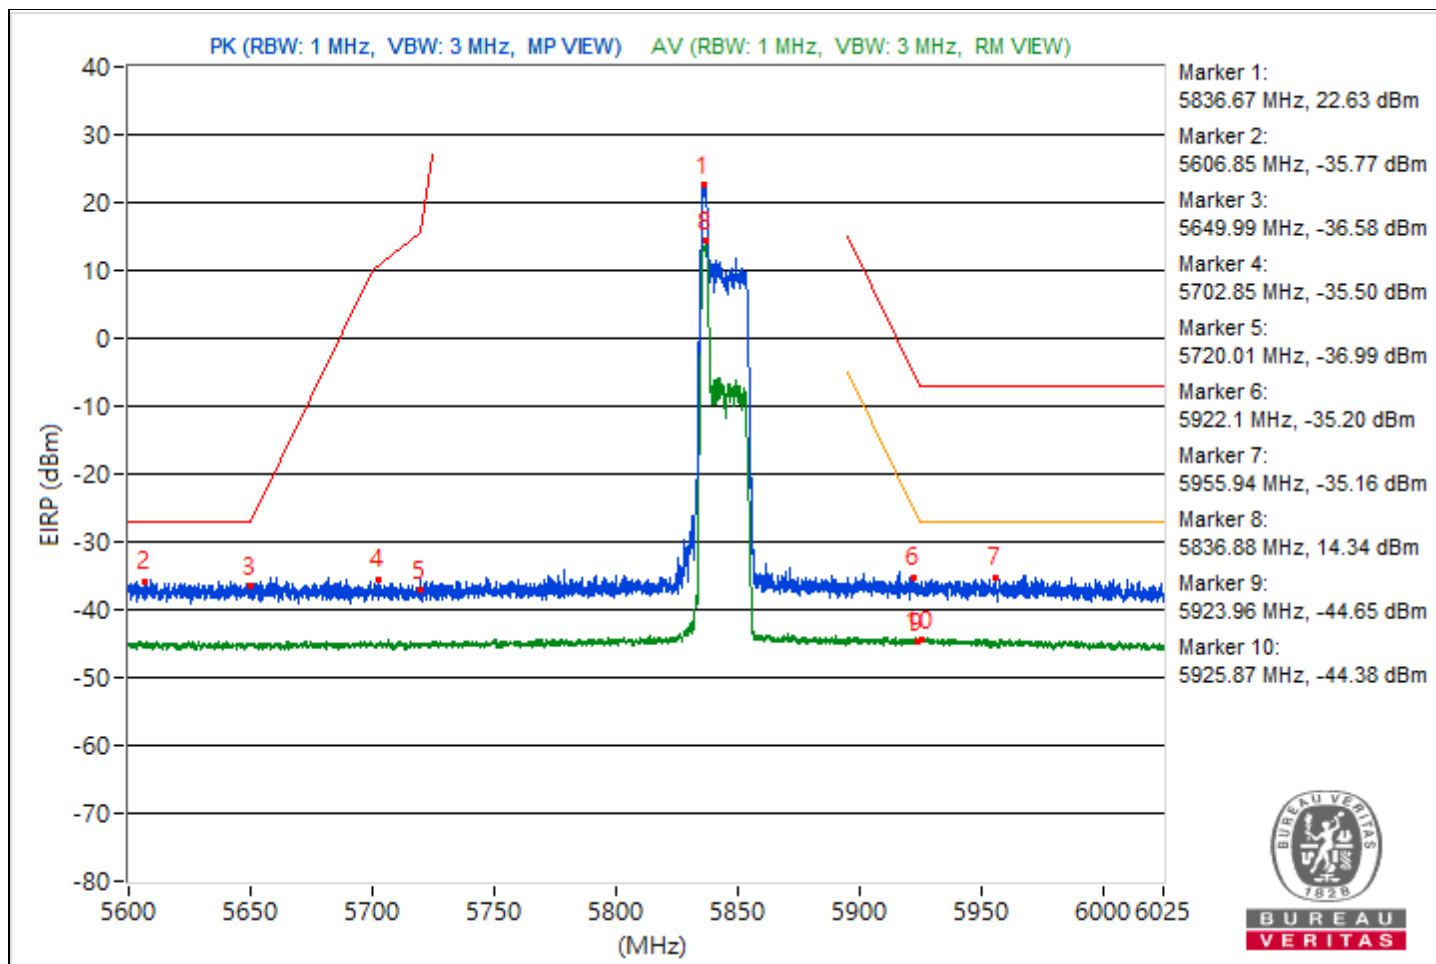


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5856.54	117.6 PK			10.98	10.95	8.37	22.34
2	#5641.81	59.39 PK	68.26	-8.87	-48.89	-46.06	8.37	-35.87
3	#5651.53	60.06 PK	69.39	-9.33	-46.33	-46.84	8.37	-35.2
4	#5702.37	59.33 PK	105.92	-46.59	-48.25	-46.53	8.37	-35.93
5	#5720.38	58.45 PK	111.73	-53.28	-47.81	-48.61	8.37	-36.81
6	#5923.58	59.45 PK	89.3	-29.85	-48.65	-46.1	8.37	-35.81
7	#5935.22	60.1 PK	88.26	-28.16	-47.37	-45.84	8.37	-35.16
8	*5856.7	109.19 AV			2.37	2.73	8.37	13.93
9	#5924.33	50.94 AV	68.75	-17.81	-55.35	-56.08	8.37	-44.32
10	#5957.43	50.94 AV	68.26	-17.32	-55.45	-55.95	8.37	-44.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

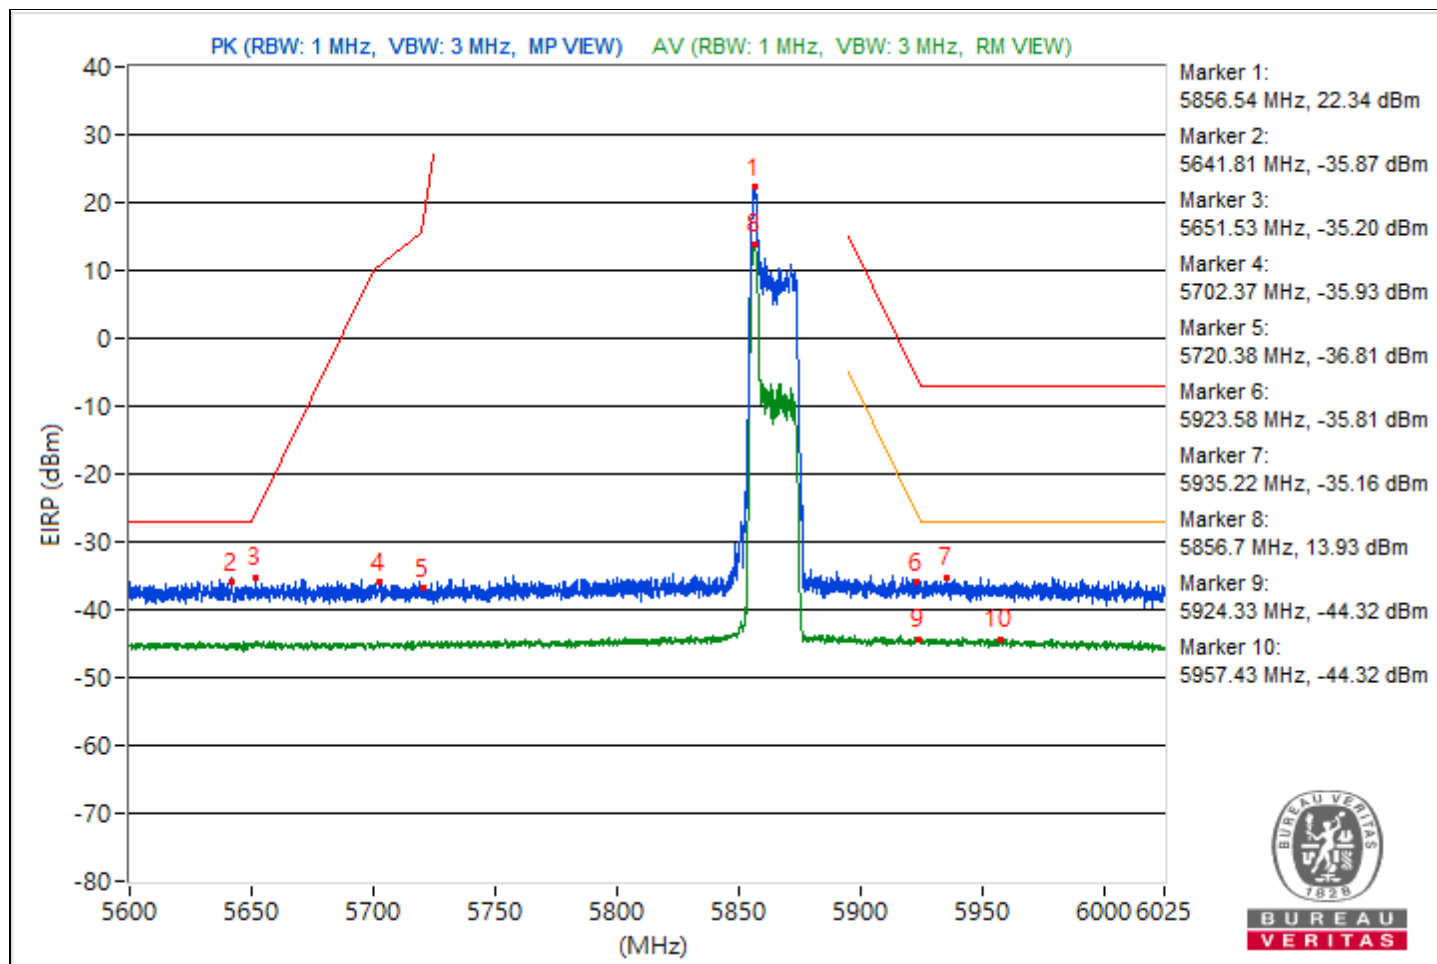


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5895	103.74 PK	110.26	-6.52	-3.5	-2.38	8.37	8.48
2	#5895	89.75 AV	90.26	-0.51	-17.2	-16.6	8.37	-5.51


Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

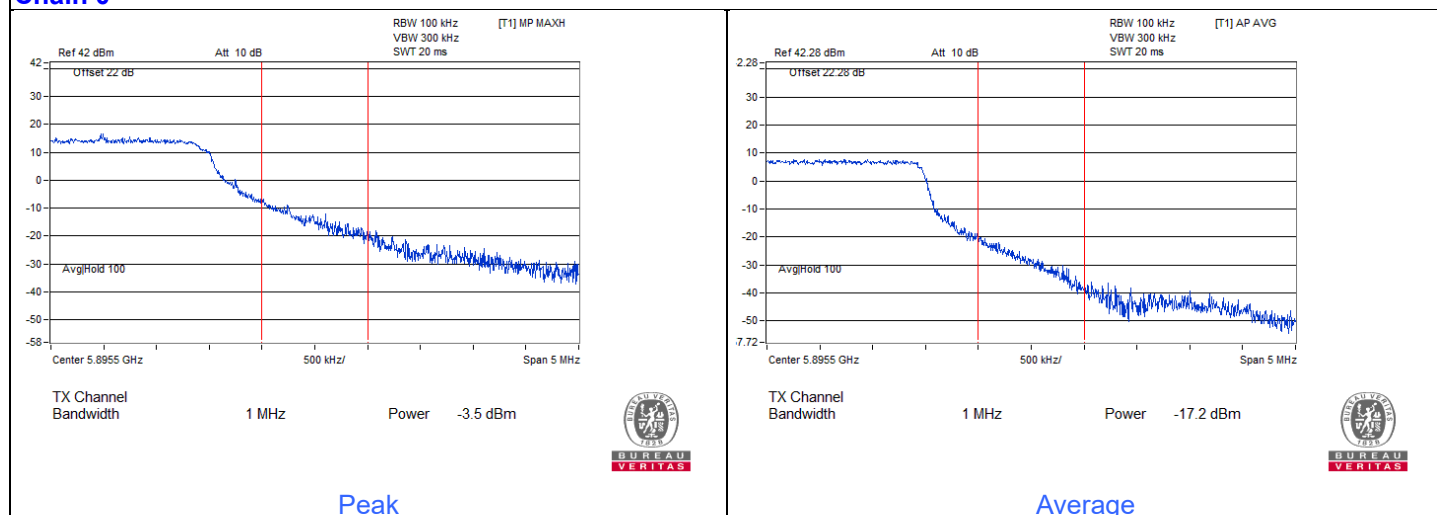

Chain 1

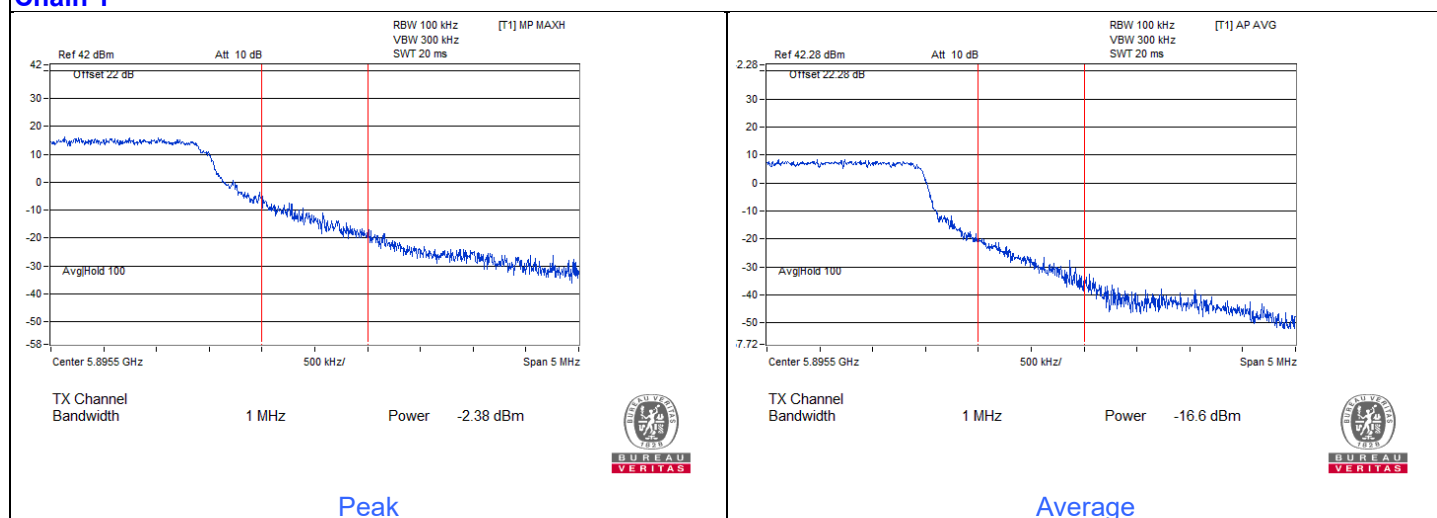


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5836.62	117.73 PK			10.95	11.23	8.37	22.47
2	#5649.51	59.63 PK	68.26	-8.63	-48.75	-45.77	8.37	-35.63
3	#5650.73	58.99 PK	68.8	-9.81	-48.61	-46.87	8.37	-36.27
4	#5701.73	59.25 PK	105.75	-46.5	-49.16	-46.14	8.37	-36.01
5	#5720.17	58.88 PK	111.24	-52.36	-47.64	-47.89	8.37	-36.38
6	#5924.22	59.52 PK	88.83	-29.31	-46.35	-48.06	8.37	-35.74
7	#5942.5	61.45 PK	88.26	-26.81	-43.7	-47.48	8.37	-33.81
8	*5837.57	109.44 AV			2.53	3.05	8.37	14.18
9	#5924.91	50.46 AV	68.32	-17.86	-55.85	-56.53	8.37	-44.8
10	#5928.15	51.14 AV	68.26	-17.12	-55.78	-55.24	8.37	-44.12

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

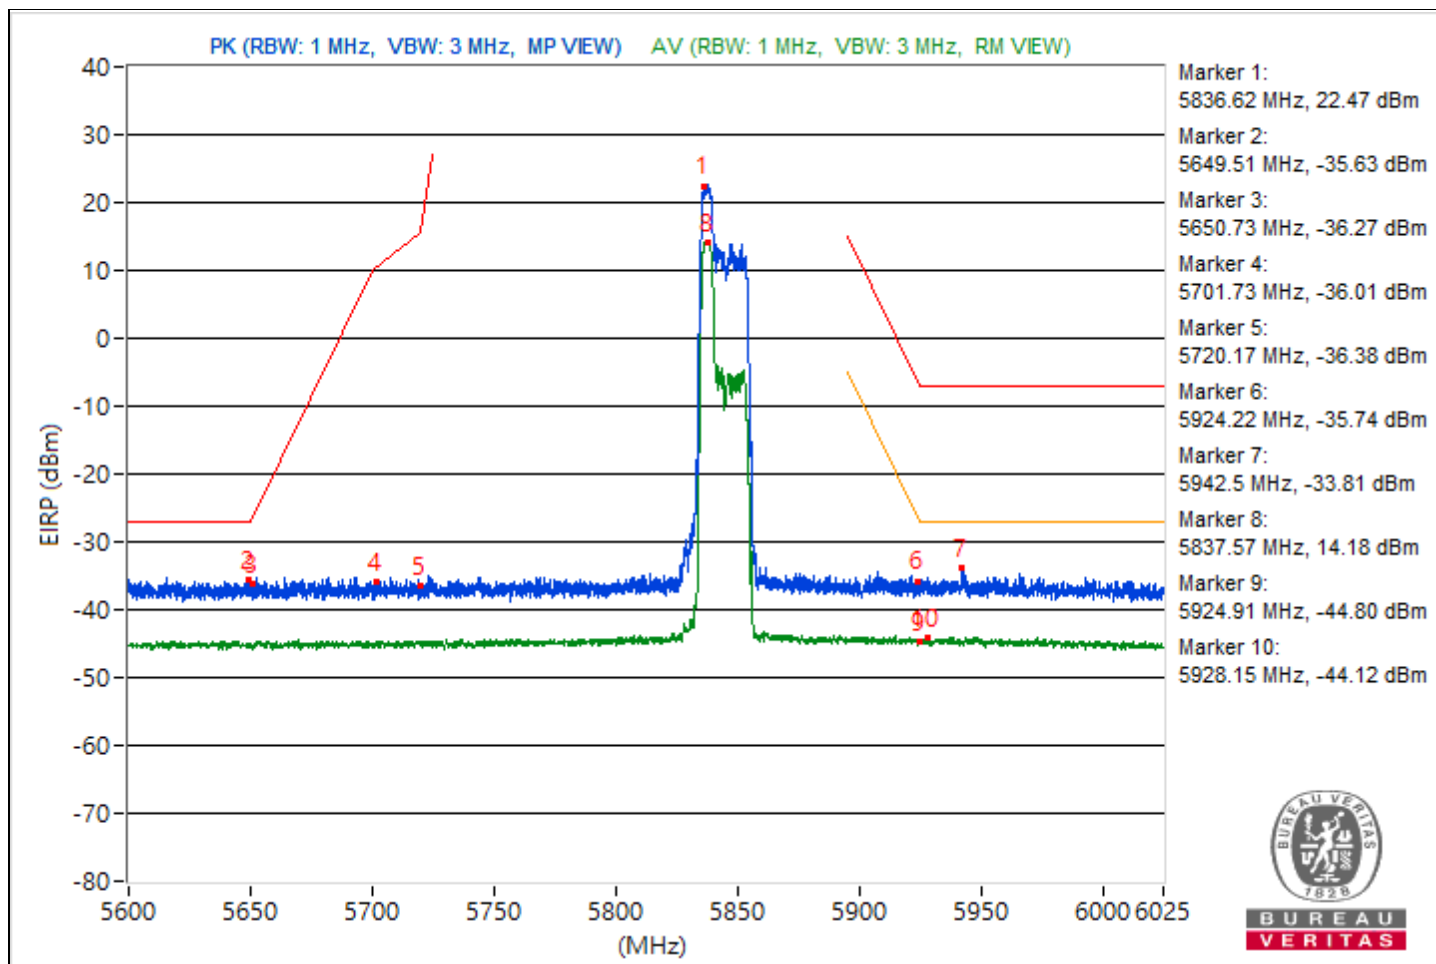


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5857.12	118.77 PK			10.66	13.22	8.37	23.51
2	#5635.06	59.45 PK	68.26	-8.81	-49.73	-45.6	8.37	-35.81
3	#5650.15	59.94 PK	68.37	-8.43	-46.98	-46.43	8.37	-35.32
4	#5701.42	59.3 PK	105.66	-46.36	-46.83	-47.92	8.37	-35.96
5	#5720.17	57.78 PK	111.24	-53.46	-48.18	-49.67	8.37	-37.48
6	#5924.75	59.5 PK	88.44	-28.94	-46.34	-48.13	8.37	-35.76
7	#5935.38	60.43 PK	88.26	-27.83	-45.54	-47.01	8.37	-34.83
8	*5856.81	109.69 AV			2.75	3.33	8.37	14.43
9	#5924.75	51.17 AV	68.44	-17.27	-55.42	-55.53	8.37	-44.09
10	#5949.3	51 AV	68.26	-17.26	-55.25	-56.07	8.37	-44.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

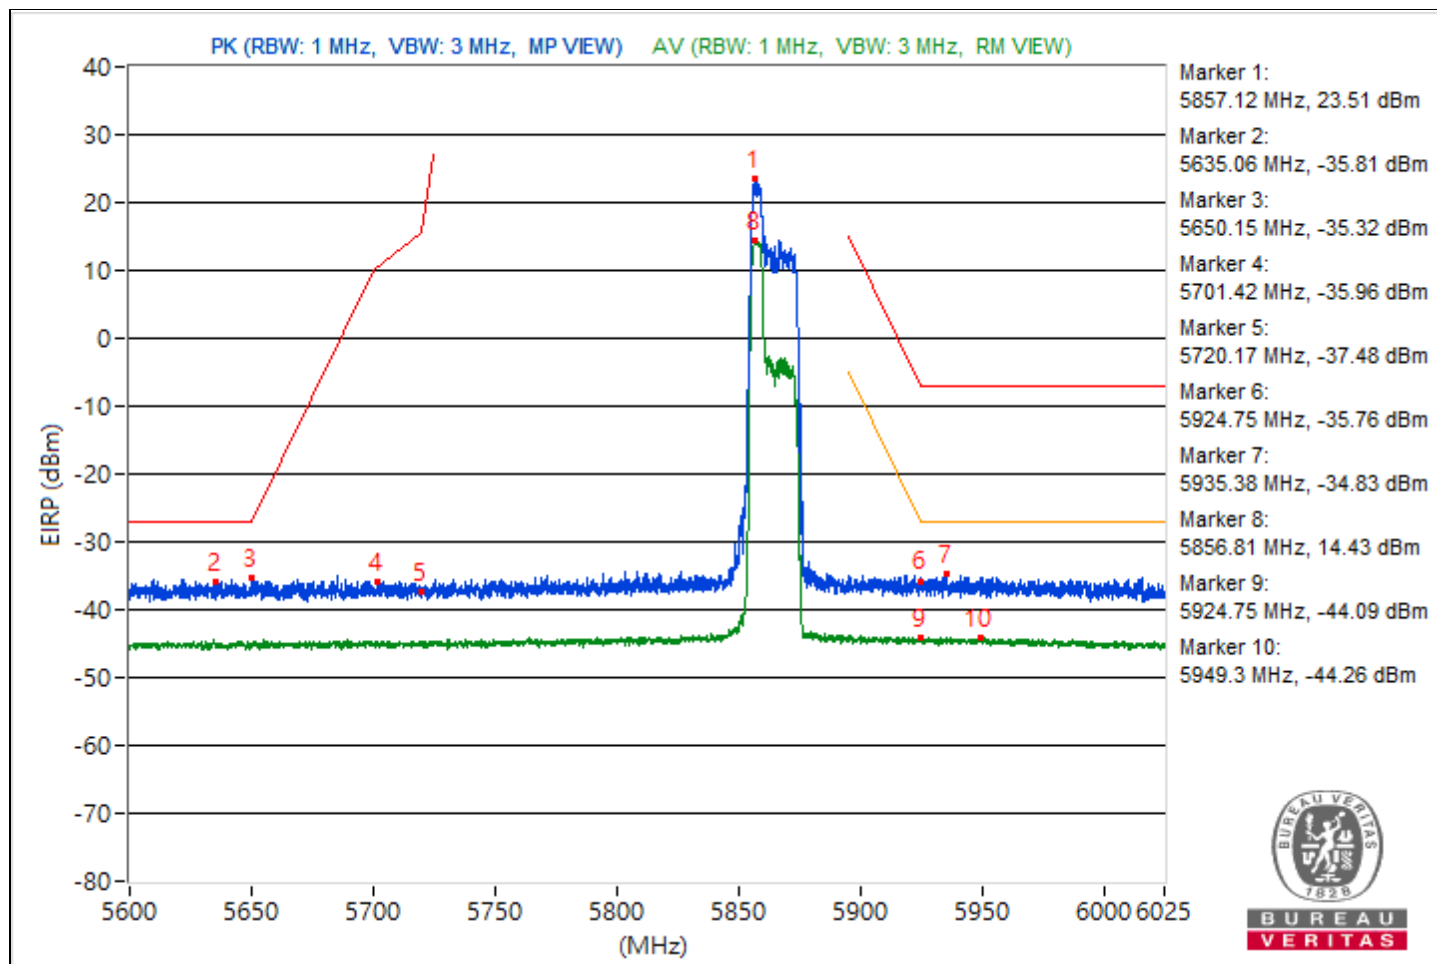


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5895	104.31 PK	110.26	-5.95	-2.94	-1.79	8.37	9.05
2	#5895	89.63 AV	90.26	-0.63	-17.15	-16.87	8.37	-5.63


Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

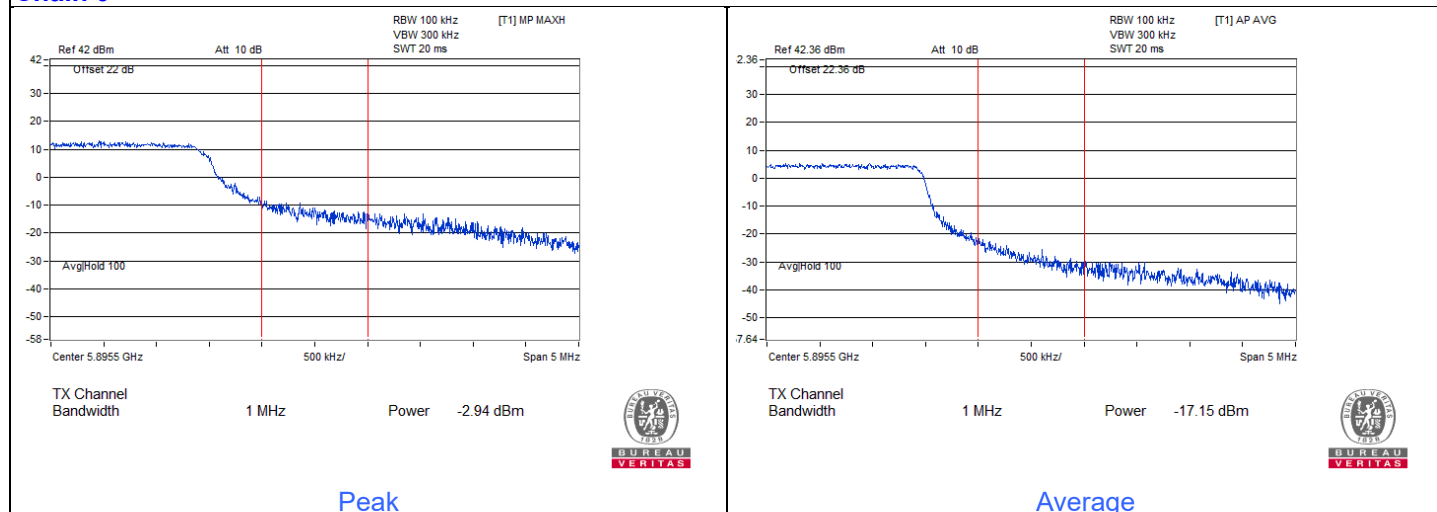

Chain 1

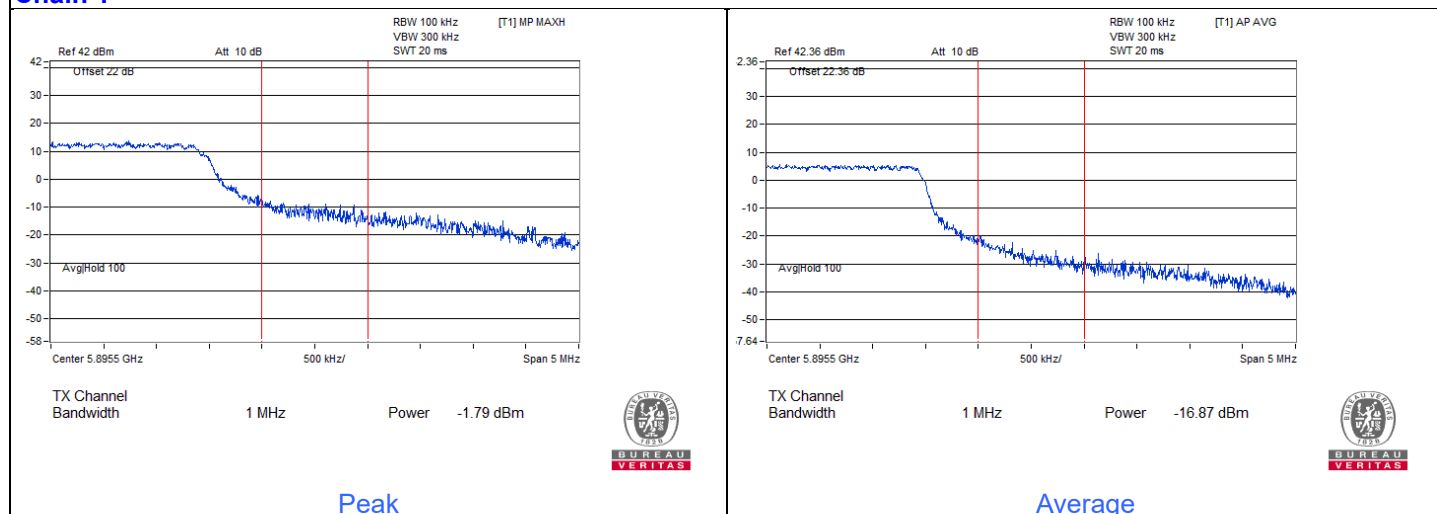


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5839.22	118.26 PK			10.7	12.37	8.37	23
2	#5642.55	61.23 PK	68.26	-7.03	-44.21	-47.09	8.37	-34.03
3	#5652.49	61.09 PK	70.1	-9.01	-44.86	-46.37	8.37	-34.17
4	#5700.41	60.26 PK	105.37	-45.11	-46.43	-46.33	8.37	-35
5	#5720.27	59.96 PK	111.49	-51.53	-46.15	-47.28	8.37	-35.3
6	#5923.37	61.08 PK	89.45	-28.37	-46.31	-44.92	8.37	-34.18
7	#5944.41	61.22 PK	88.26	-27.04	-43.61	-48.6	8.37	-34.04
8	*5839.59	109.7 AV			3.2	2.92	8.37	14.44
9	#5924.86	52.11 AV	68.36	-16.25	-54.47	-54.59	8.37	-43.15
10	#5937.87	52.23 AV	68.26	-16.03	-54.73	-54.11	8.37	-43.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

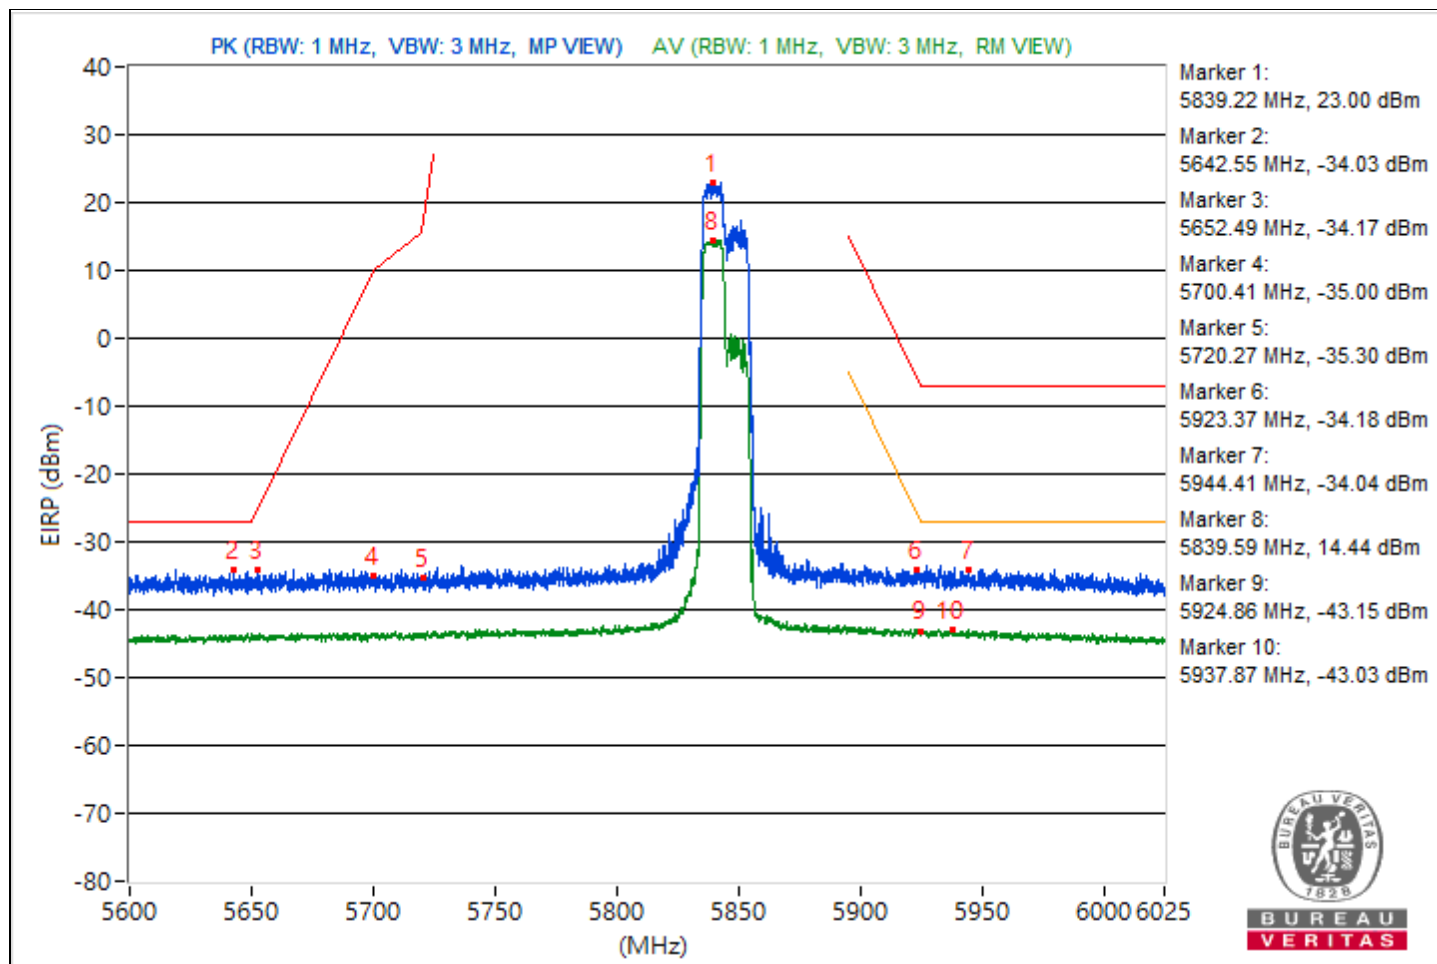


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5862.23	119.6 PK			13.68	12.09	8.37	24.34
2	#5606.91	60.56 PK	68.26	-7.7	-48.79	-44.43	8.37	-34.7
3	#5650.04	59.22 PK	68.29	-9.07	-47.23	-47.61	8.37	-36.04
4	#5702.37	61.07 PK	105.92	-44.85	-46.62	-44.73	8.37	-34.19
5	#5720.27	60.05 PK	111.49	-51.44	-45.61	-47.85	8.37	-35.21
6	#5923.11	61.45 PK	89.65	-28.2	-43.49	-48.03	8.37	-33.81
7	#5942.23	61.39 PK	88.26	-26.87	-43.82	-47.41	8.37	-33.87
8	*5858.08	110.06 AV			3.65	3.17	8.37	14.8
9	#5924.7	52.02 AV	68.48	-16.46	-53.97	-55.39	8.37	-43.24
10	#5930.01	52.35 AV	68.26	-15.91	-54.83	-53.8	8.37	-42.91

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

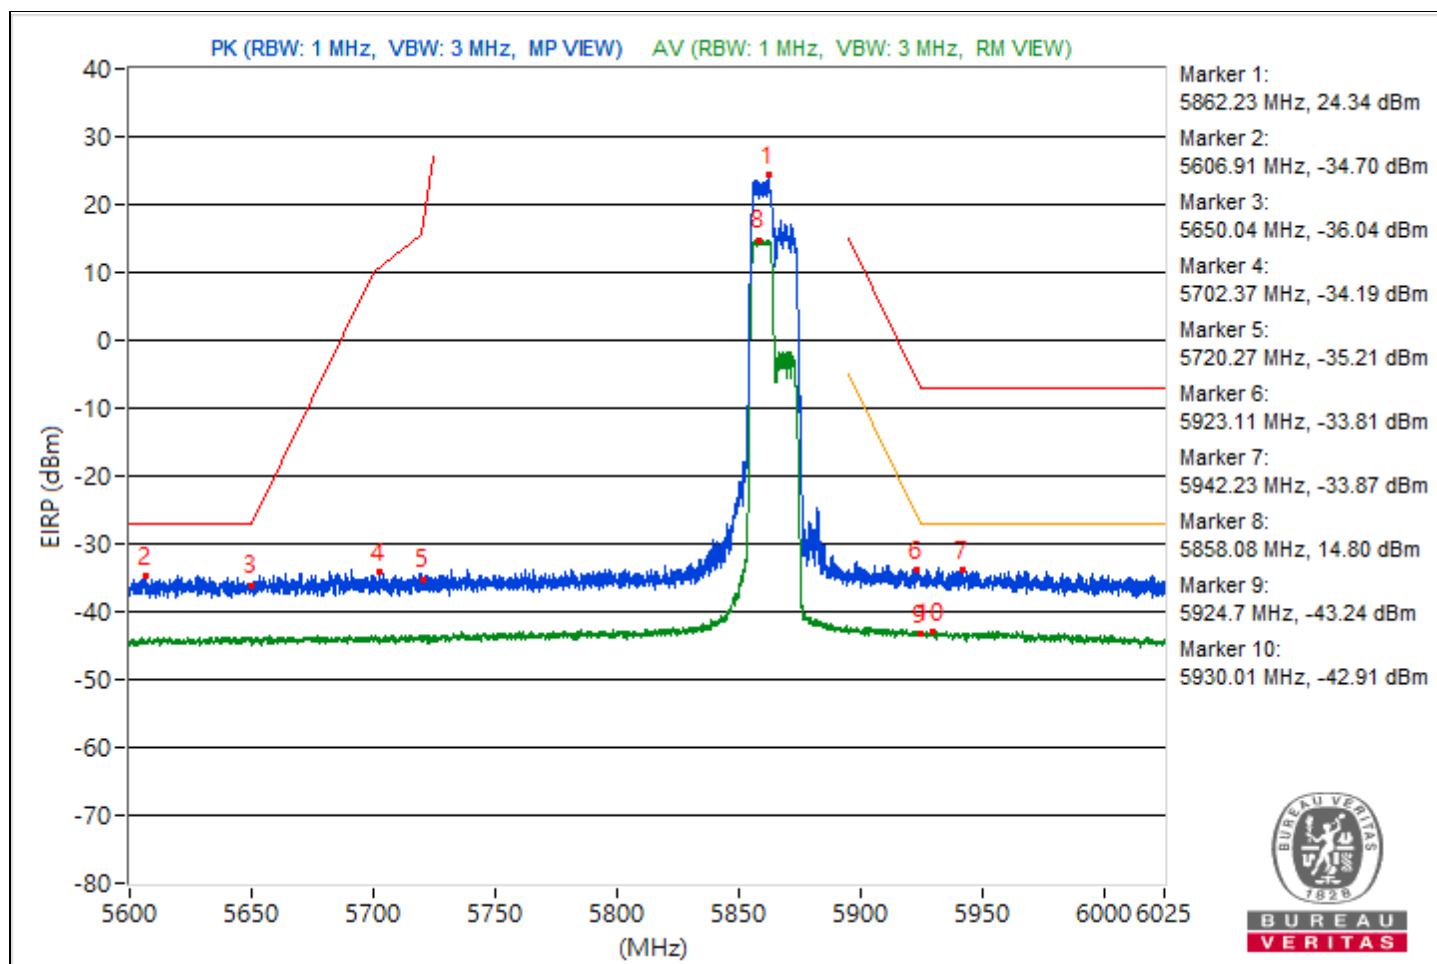


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5895	102.78 PK	110.28	-7.48	-4.15	-3.58	8.37	7.52
2	#5895	89.24 AV	90.26	-1.02	-17.87	-16.97	8.37	-6.02


Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

Chain 0

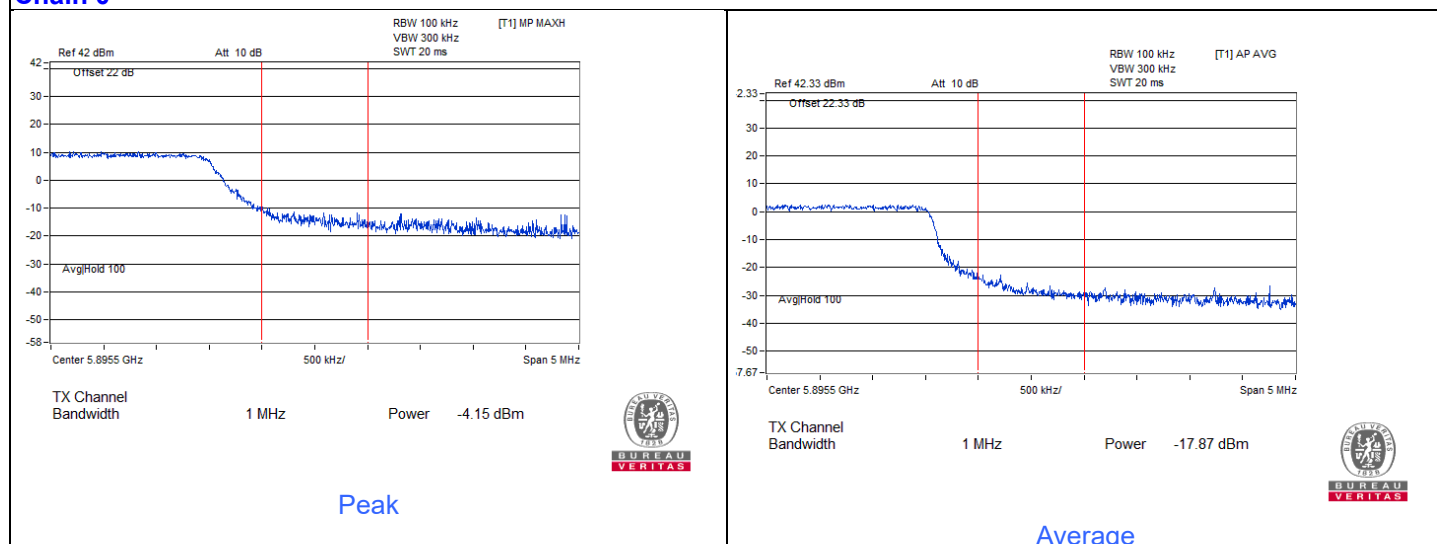

Chain 1

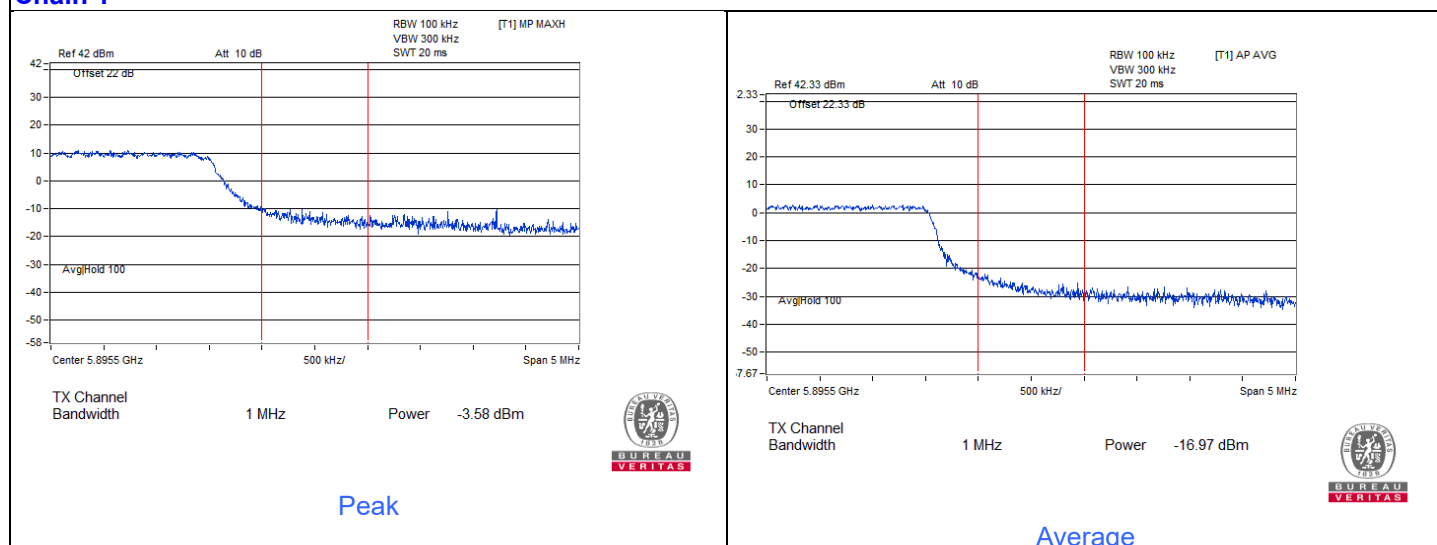


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5841.56	120.22 PK			12.65	14.35	8.37	24.96
2	#5629.91	60.04 PK	68.26	-8.22	-49.08	-45.03	8.37	-35.22
3	#5651.8	59.42 PK	69.59	-10.17	-46.3	-48.38	8.37	-35.84
4	#5702.69	59.96 PK	106.01	-46.05	-48	-45.67	8.37	-35.3
5	#5720.01	60 PK	110.88	-50.88	-47.03	-46.29	8.37	-35.26
6	#5923	60.52 PK	89.73	-29.21	-46.38	-45.88	8.37	-34.74
7	#5971.45	60.86 PK	88.26	-27.4	-47.38	-44.62	8.37	-34.4
8	*5841.93	109.77 AV			3.04	3.22	8.37	14.51
9	#5924.49	50.99 AV	68.64	-17.65	-55.99	-55.33	8.37	-44.27
10	#5934.21	51.25 AV	68.26	-17.01	-55.8	-55.01	8.37	-44.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

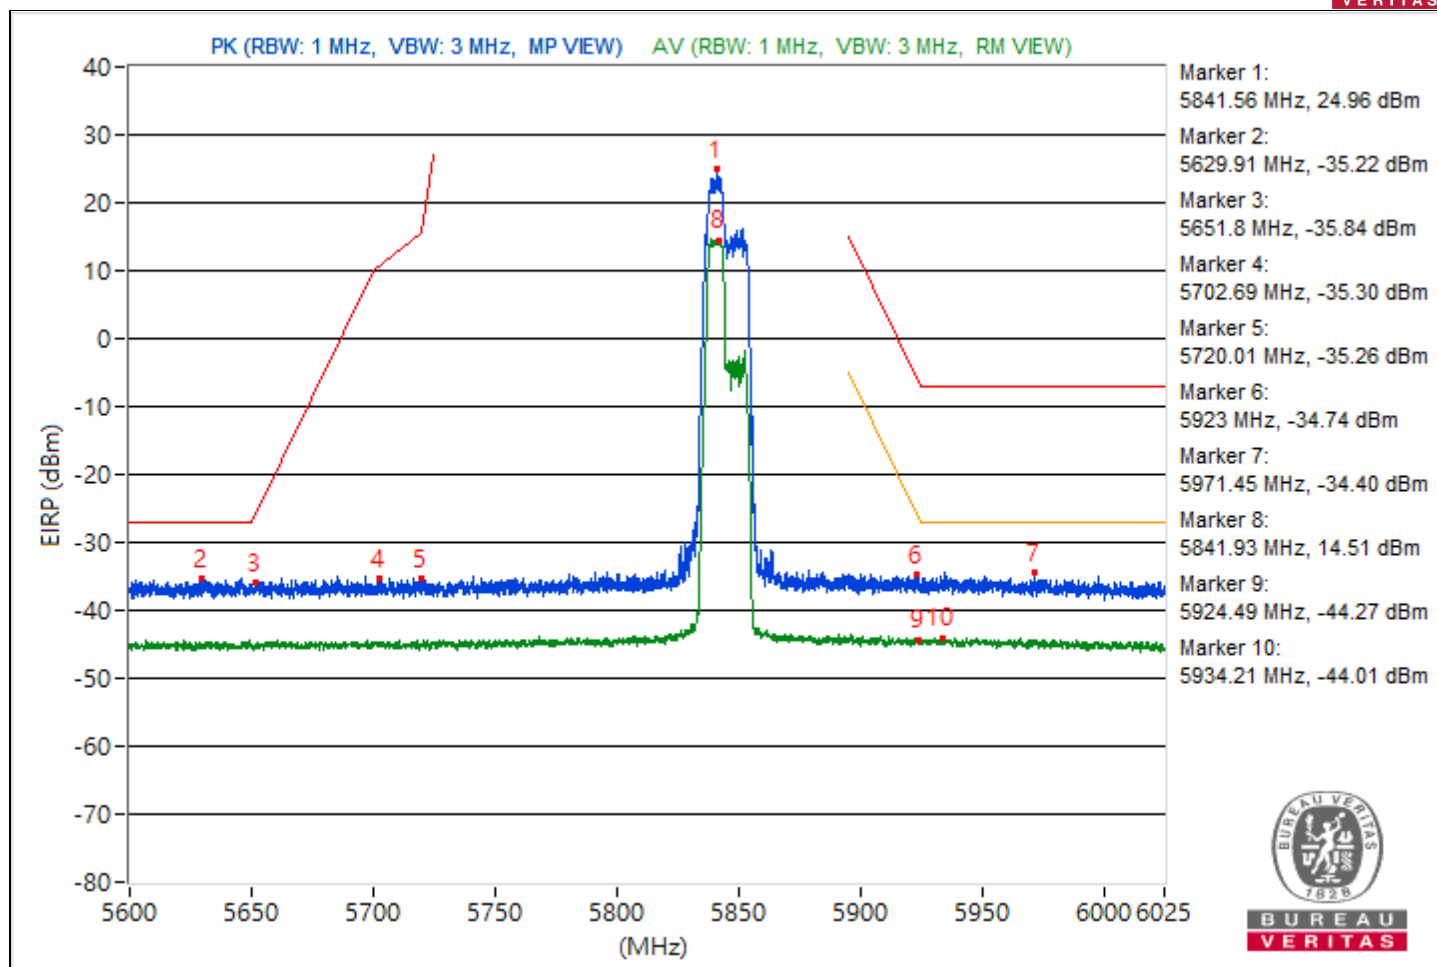


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5861.91	118.85 PK			12.26	12.17	8.37	23.59
2	#5646.06	59.59 PK	68.26	-8.67	-46.32	-47.94	8.37	-35.67
3	#5652.91	59.54 PK	70.42	-10.88	-49.05	-45.76	8.37	-35.72
4	#5705.56	59.7 PK	106.82	-47.12	-46.77	-47.11	8.37	-35.56
5	#5720.12	58.91 PK	111.12	-52.21	-46.68	-49.12	8.37	-36.35
6	#5924.86	59.35 PK	88.36	-29.01	-48.29	-46.48	8.37	-35.91
7	#5925.02	60.22 PK	88.26	-28.04	-47.9	-45.32	8.37	-35.04
8	*5862.12	109.64 AV			1.84	3.92	8.37	14.38
9	#5924.91	50.74 AV	68.32	-17.58	-56.46	-55.4	8.37	-44.52
10	#5931.61	51.55 AV	68.26	-16.71	-55.55	-54.67	8.37	-43.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

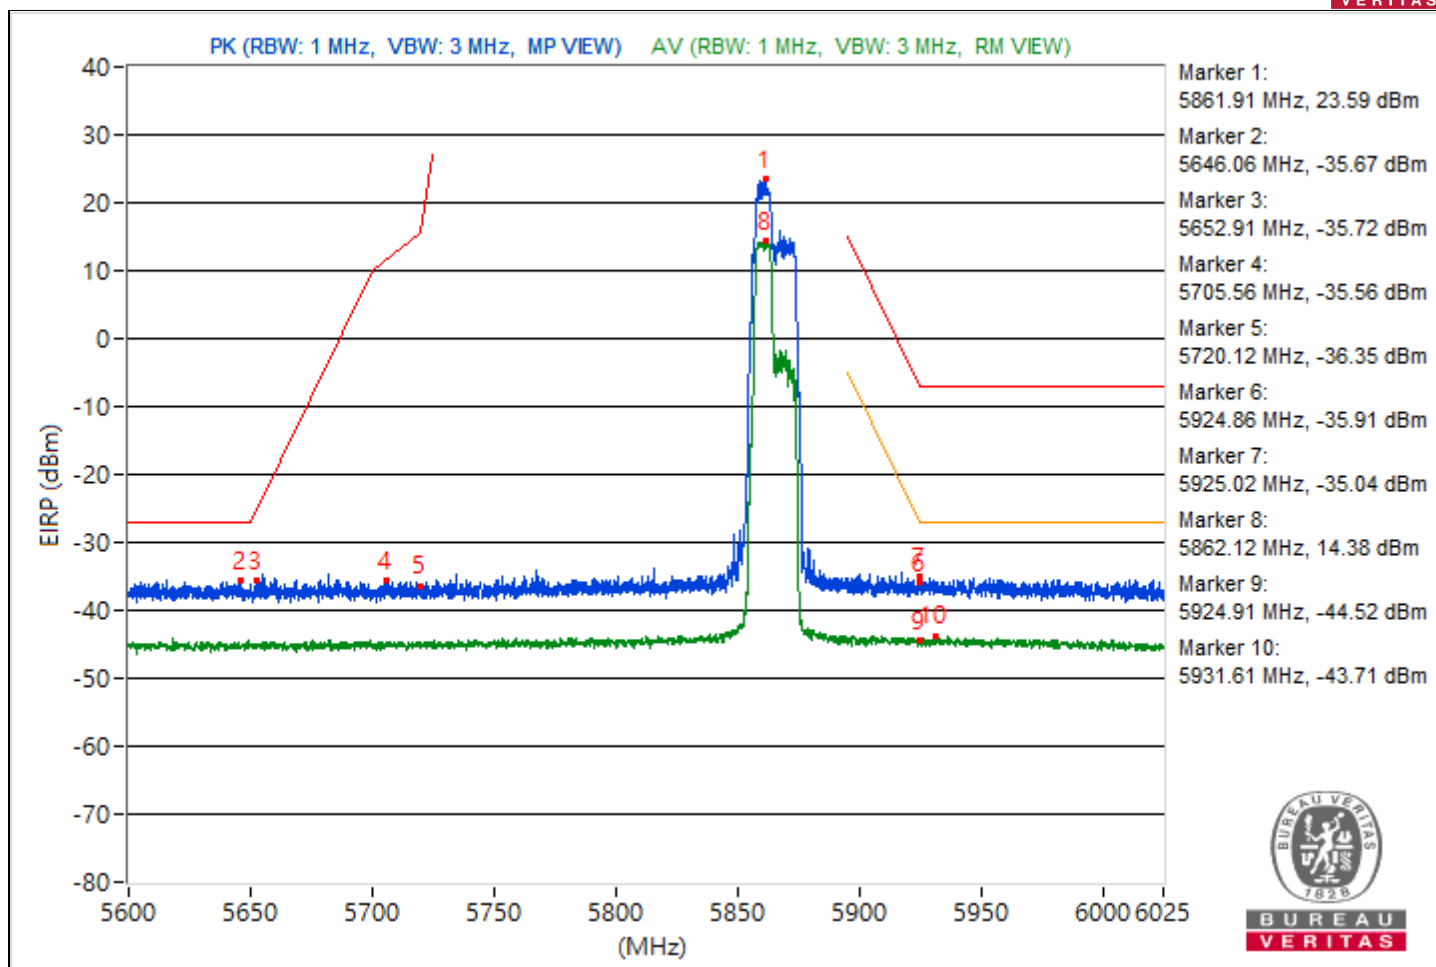


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5888.04	119.36 PK			12.97	12.45	8.37	24.1
2	#5614.34	59.87 PK	68.26	-8.39	-45.74	-48.12	8.37	-35.39
3	#5650.26	59.59 PK	68.45	-8.86	-46.21	-48.09	8.37	-35.67
4	#5702.37	60.09 PK	105.92	-45.83	-45.73	-47.55	8.37	-35.17
5	#5720.22	59.18 PK	111.37	-52.19	-47.47	-47.46	8.37	-36.08
6	#5895.22	92.4 PK	110.1	-17.7	-14.54	-13.95	8.37	-2.86
7	#5931.45	61 PK	88.26	-27.26	-46.8	-44.72	8.37	-34.26
8	*5889.27	110.21 AV			2.84	4.2	8.37	14.95
9	#5895.06	75.9 AV	90.22	-14.32	-30.8	-30.69	8.37	-19.36
10	#5925.66	51.39 AV	68.26	-16.87	-55.52	-55	8.37	-43.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

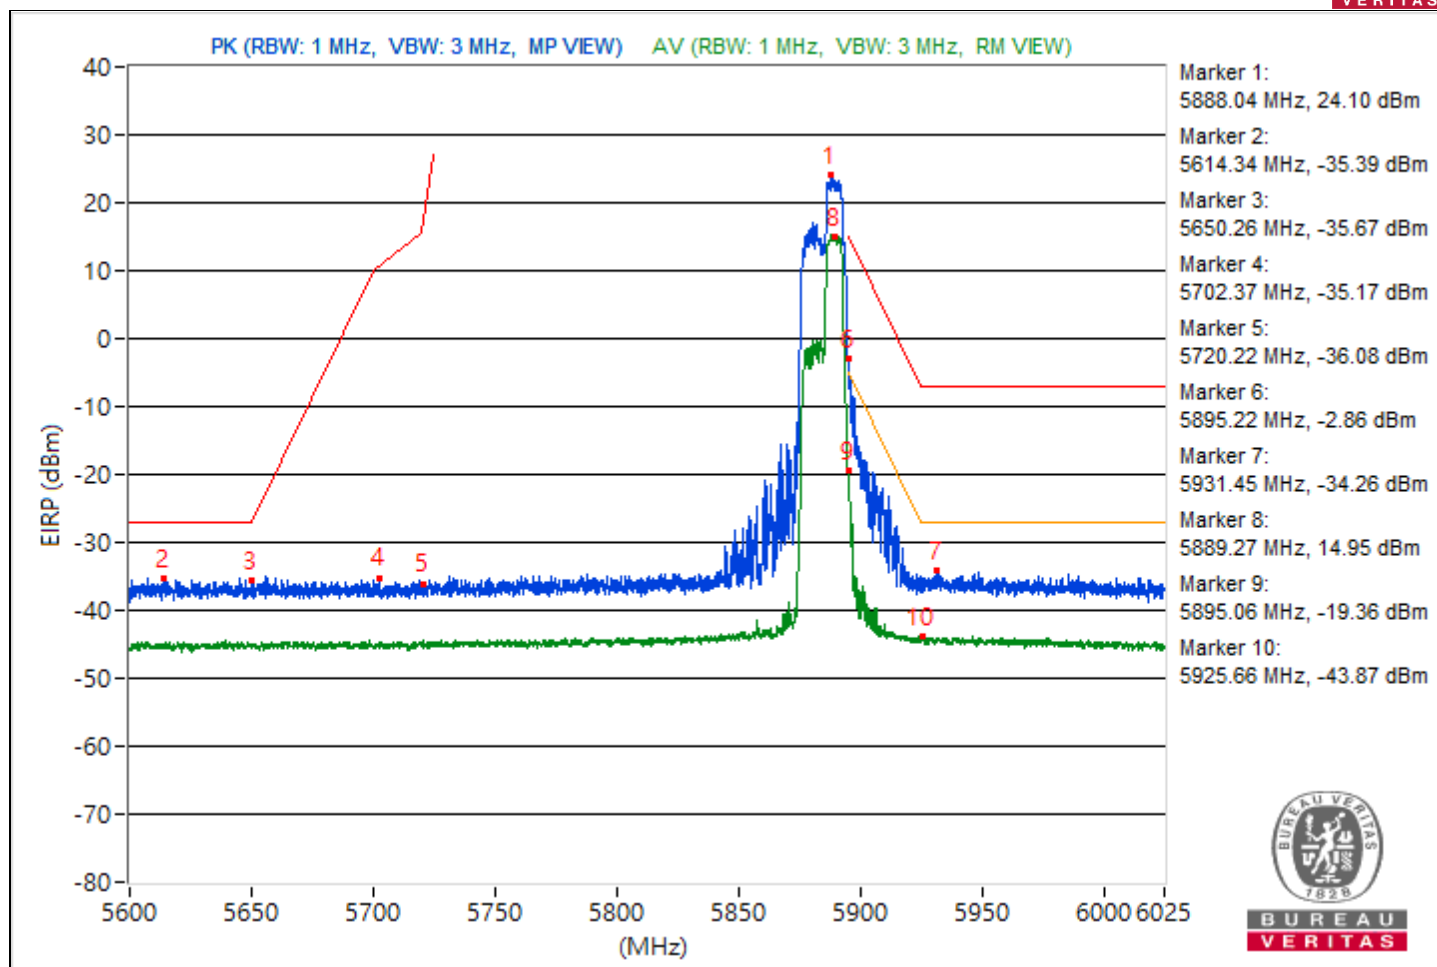


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5841.29	117.98 PK			10.15	12.27	8.37	22.72
2	#5613.33	60.01 PK	68.26	-8.25	-48.84	-45.17	8.37	-35.25
3	#5651.32	59.65 PK	69.24	-9.59	-46.05	-48.19	8.37	-35.61
4	#5701.15	59.67 PK	105.58	-45.91	-45.56	-49.06	8.37	-35.59
5	#5720.01	59.2 PK	110.88	-51.68	-47.46	-47.42	8.37	-36.06
6	#5924.59	59.77 PK	88.56	-28.79	-45.3	-49.36	8.37	-35.49
7	#5957.48	60.86 PK	88.26	-27.4	-44.65	-47.33	8.37	-34.4
8	*5844	109.3 AV			2.73	2.59	8.37	14.04
9	#5924.43	51.34 AV	68.67	-17.33	-55.05	-55.58	8.37	-43.92
10	#5930.76	51.15 AV	68.26	-17.11	-56.24	-54.86	8.37	-44.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

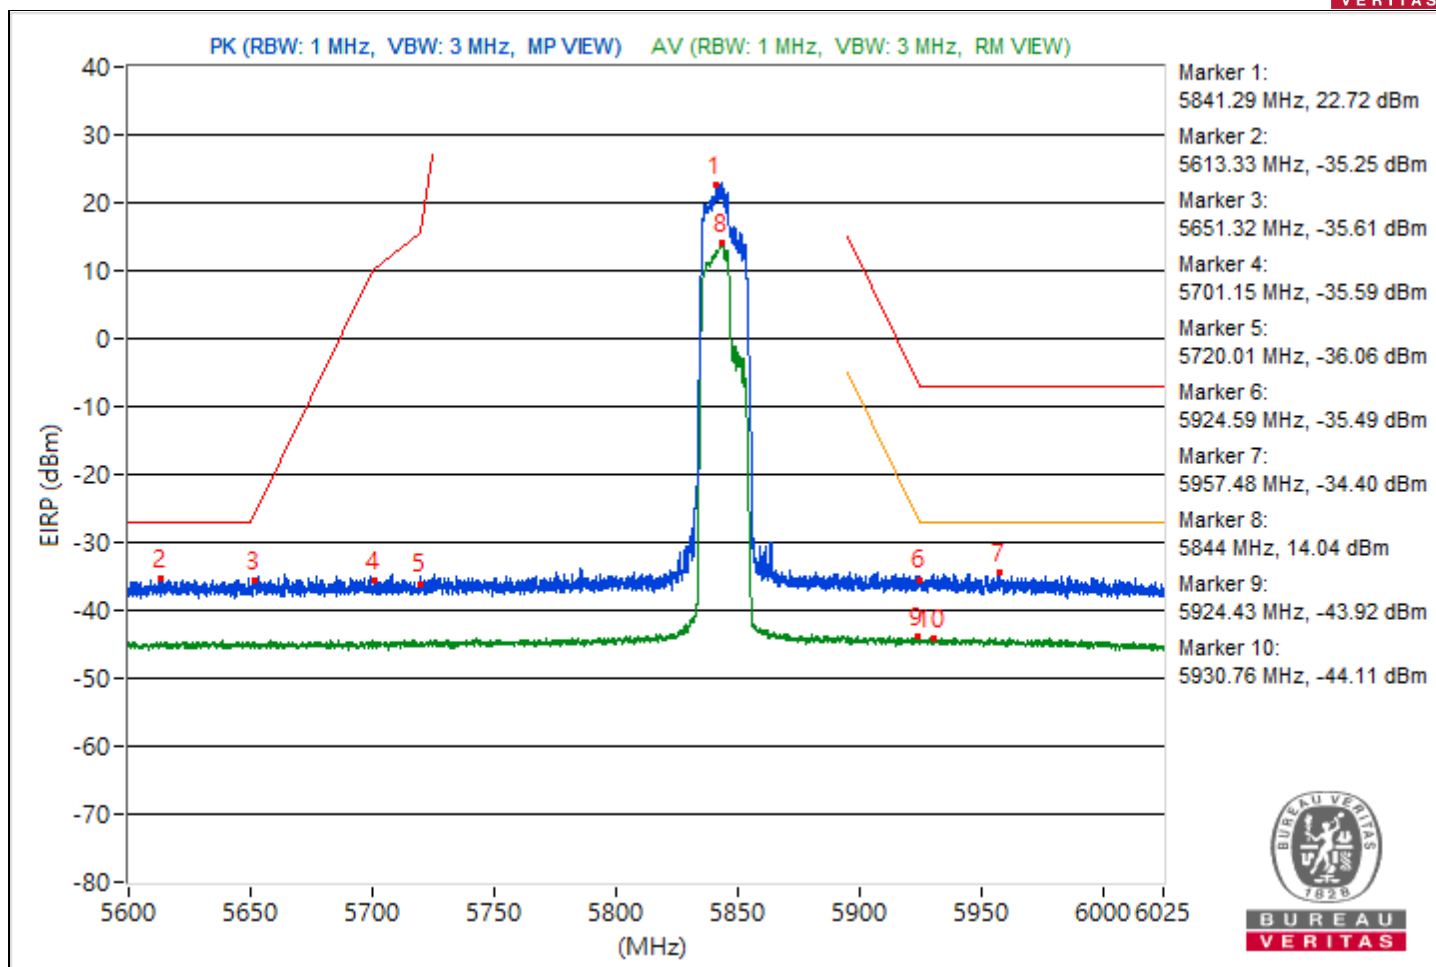


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5863.5	117.83 PK			11.96	10.25	8.37	22.57
2	#5647.6	59.8 PK	68.26	-8.46	-46.39	-47.34	8.37	-35.46
3	#5649.99	59.19 PK	68.26	-9.07	-46.78	-48.24	8.37	-36.07
4	#5701.2	60.28 PK	105.6	-45.32	-47.78	-45.29	8.37	-34.98
5	#5720.01	58.44 PK	110.88	-52.44	-48.31	-48.09	8.37	-36.82
6	#5924.75	60.4 PK	88.44	-28.04	-46.82	-45.73	8.37	-34.86
7	#5928.63	60.61 PK	88.26	-27.65	-47.74	-44.8	8.37	-34.65
8	*5864.03	110.04 AV			3.23	3.57	8.37	14.78
9	#5924.91	50.98 AV	68.32	-17.34	-55.73	-55.58	8.37	-44.28
10	#5934.85	51.16 AV	68.26	-17.1	-55.9	-55.1	8.37	-44.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

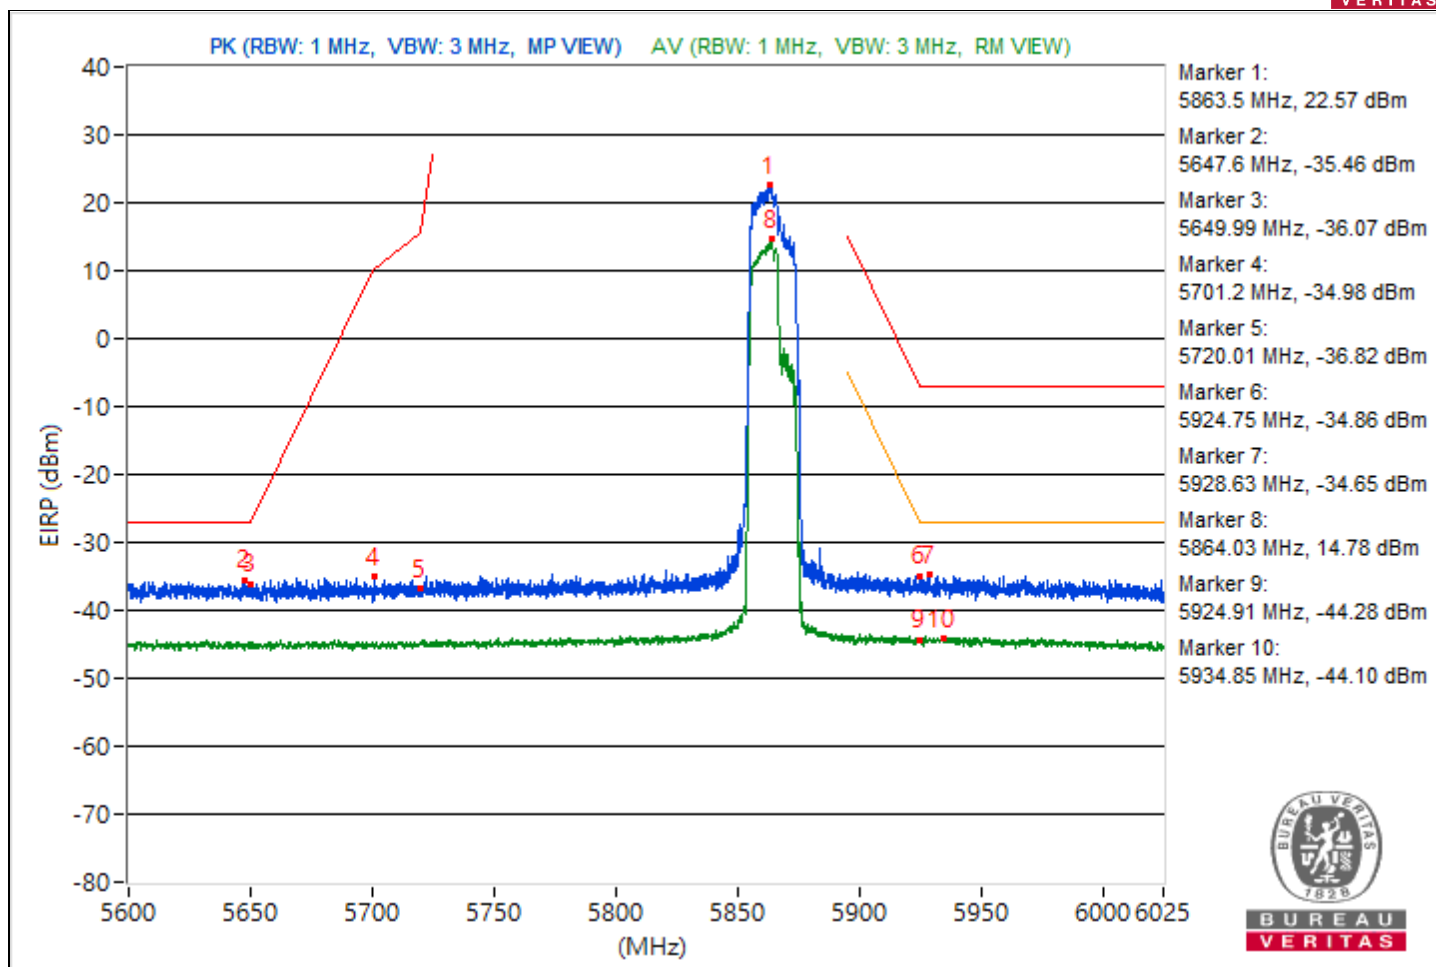


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5895	101.99 PK	110.26	-8.27	-4.83	-4.48	8.37	6.73
2	#5895	89.37AV	90.26	-0.89	-17.73	-16.85	8.37	-5.89


Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

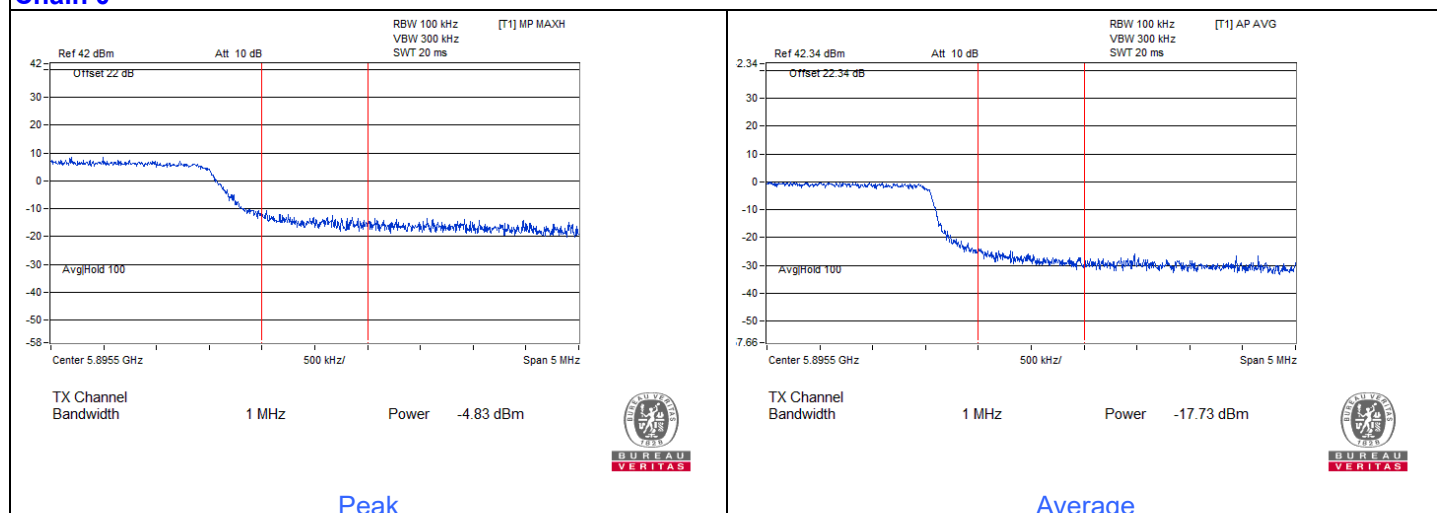

Chain 1

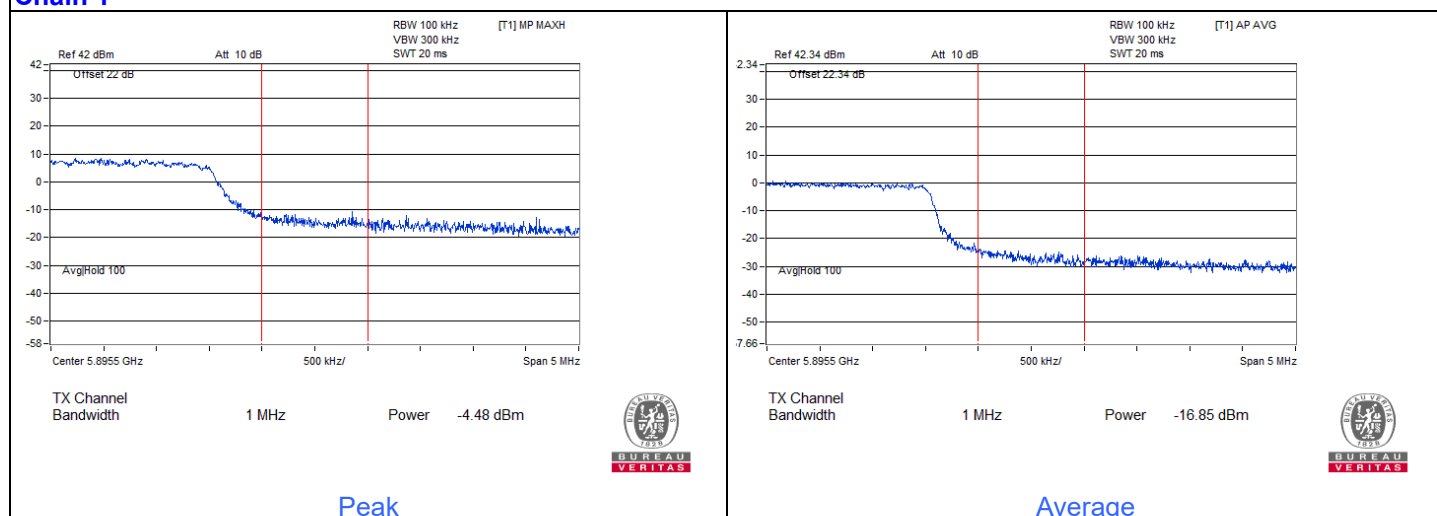


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5861.16	115.32 PK			4.82	10.69	8.37	20.06
2	#5644.2	59.66 PK	68.26	-8.6	-45.74	-48.73	8.37	-35.6
3	#5650.68	59.71 PK	68.76	-9.05	-45.21	-49.81	8.37	-35.55
4	#5704.39	59.51 PK	106.49	-46.98	-46.15	-48.4	8.37	-35.75
5	#5720.01	59.59 PK	110.88	-51.29	-46.32	-47.92	8.37	-35.67
6	#5907.81	87.24 PK	100.87	-13.63	-16.84	-26.46	8.37	-8.02
7	#5936.65	63.39 PK	88.26	-24.87	-41.81	-45.42	8.37	-31.87
8	*5857.18	108.72 AV			3.07	0.79	8.37	13.46
9	#5895	88.06 AV	90.26	-2.2	-18.03	-19.21	8.37	-7.2
10	#5927.04	55.55 AV	68.26	-12.71	-50.34	-52.01	8.37	-39.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

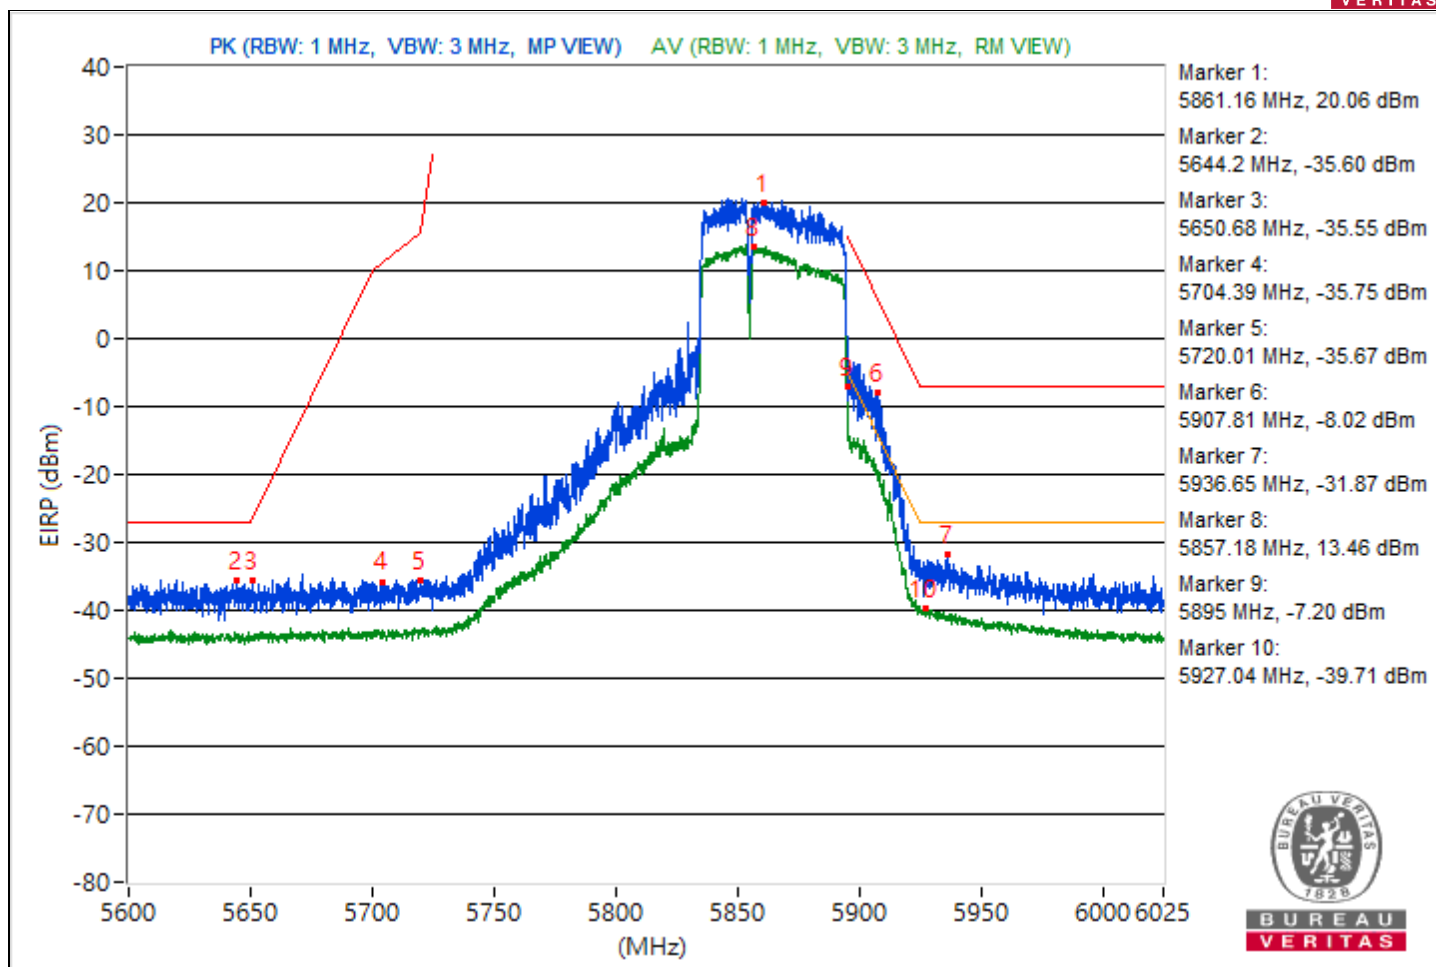


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5800.18	114.15 PK			4.56	9.25	8.37	18.89
2	#5641.54	62.03 PK	68.26	-6.23	-46.76	-43.17	8.37	-33.23
3	#5650.47	61.72 PK	68.61	-6.89	-45.24	-44.62	8.37	-33.54
4	#5704.5	65.6 PK	106.52	-40.92	-42.23	-40.1	8.37	-29.66
5	#5720.54	69.61 PK	112.09	-42.48	-34.67	-42.61	8.37	-25.65
6	#5899.09	86.86 PK	107.26	-20.4	-26.39	-17.27	8.37	-8.4
7	#5926.29	68.25 PK	88.26	-20.01	-37.37	-39.72	8.37	-27.01
8	*5812.93	106.12 AV			-0.25	-0.8	8.37	10.86
9	#5924.65	59.42 AV	68.52	-9.1	-47.41	-47.03	8.37	-35.84
10	#5927.41	59.8 AV	68.26	-8.46	-46.2	-47.58	8.37	-35.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

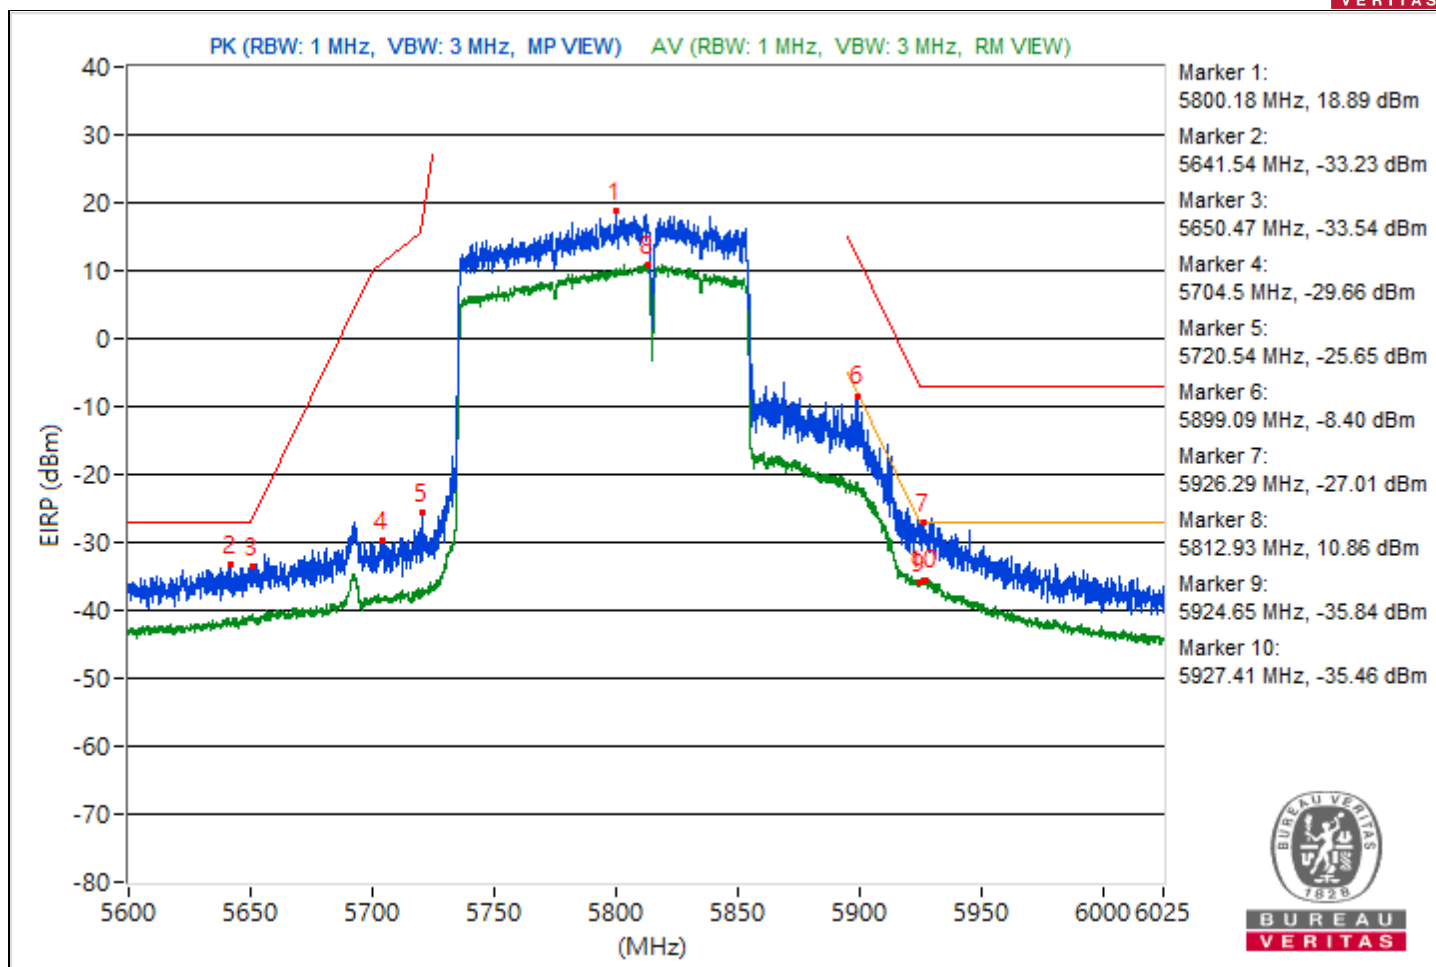


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 66% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5829.07	112.64 PK			3.01	7.76	8.37	17.38
2	#5633.36	63.84 PK	68.26	-4.42	-46.86	-40.73	8.37	-31.42
3	#5650.04	63.16 PK	68.29	-5.13	-42.99	-44.03	8.37	-32.1
4	#5700.46	68.81 PK	105.39	-36.58	-36.91	-39	8.37	-26.45
5	#5720.27	67.4 PK	111.49	-44.09	-36.68	-46.37	8.37	-27.86
6	#5922.79	69.33 PK	89.88	-20.55	-35.65	-40.02	8.37	-25.93
7	#5940.32	71.07 PK	88.26	-17.19	-35.75	-35.41	8.37	-24.19
8	*5820.89	105.47 AV			-0.87	-1.48	8.37	10.21
9	#5924.54	60.66 AV	68.6	-7.94	-46.4	-45.59	8.37	-34.6
10	#5941.43	61.14 AV	68.26	-7.12	-46.2	-44.9	8.37	-34.12

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

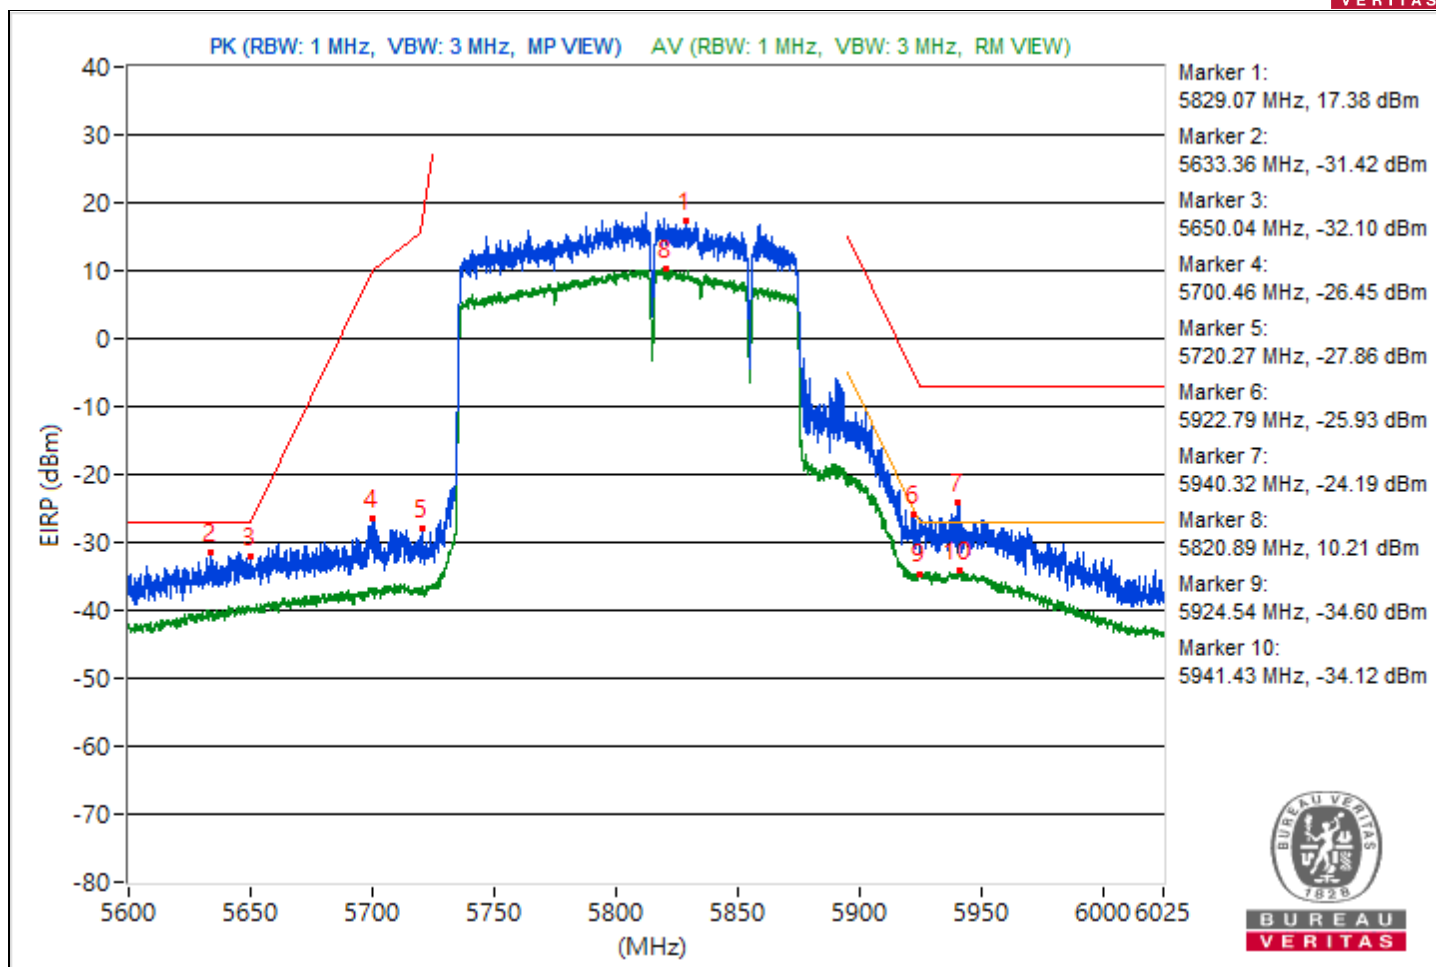

Mode B
1TX

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	46.9 PK	74.0	-27.1	3.26 H	37	35.8	11.1
2	11690.00	38.3 AV	54.0	-15.7	3.26 H	37	27.2	11.1
3	#17535.00	55.4 PK	88.2	-32.8	1.53 H	188	37.1	18.3
4	#17535.00	43.2 AV	68.2	-25.0	1.53 H	188	24.9	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	49.0 PK	74.0	-25.0	1.83 V	205	37.9	11.1
2	11690.00	40.2 AV	54.0	-13.8	1.83 V	205	29.1	11.1
3	#17535.00	52.8 PK	88.2	-35.4	1.55 V	83	34.5	18.3
4	#17535.00	41.1 AV	68.2	-27.1	1.55 V	83	22.8	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.2 PK	74.0	-26.8	3.30 H	35	36.2	11.0
2	11730.00	38.8 AV	54.0	-15.2	3.30 H	35	27.8	11.0
3	#17595.00	55.3 PK	88.2	-32.9	1.53 H	194	36.3	19.0
4	#17595.00	42.8 AV	68.2	-25.4	1.53 H	194	23.8	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	49.7 PK	74.0	-24.3	1.82 V	178	38.7	11.0
2	11730.00	40.6 AV	54.0	-13.4	1.82 V	178	29.6	11.0
3	#17595.00	53.4 PK	88.2	-34.8	1.50 V	59	34.4	19.0
4	#17595.00	41.4 AV	68.2	-26.8	1.50 V	59	22.4	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	46.6 PK	74.0	-27.4	3.21 H	49	35.7	10.9
2	11770.00	38.0 AV	54.0	-16.0	3.21 H	49	27.1	10.9
3	#17655.00	55.2 PK	88.2	-33.0	1.47 H	181	35.9	19.3
4	#17655.00	43.0 AV	68.2	-25.2	1.47 H	181	23.7	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	50.0 PK	74.0	-24.0	1.77 V	181	39.1	10.9
2	11770.00	40.9 AV	54.0	-13.1	1.77 V	181	30.0	10.9
3	#17655.00	53.1 PK	88.2	-35.1	1.46 V	61	33.8	19.3
4	#17655.00	41.2 AV	68.2	-27.0	1.46 V	61	21.9	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	50.6 PK	74.0	-23.4	3.12 H	38	39.5	11.1
2	11690.00	41.1 AV	54.0	-12.9	3.12 H	38	30.0	11.1
3	#17535.00	56.4 PK	88.2	-31.8	1.44 H	200	38.1	18.3
4	#17535.00	43.9 AV	68.2	-24.3	1.44 H	200	25.6	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	50.4 PK	74.0	-23.6	2.00 V	184	39.3	11.1
2	11690.00	40.9 AV	54.0	-13.1	2.00 V	184	29.8	11.1
3	#17535.00	55.9 PK	88.2	-32.3	1.43 V	95	37.6	18.3
4	#17535.00	43.5 AV	68.2	-24.7	1.43 V	95	25.2	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	50.5 PK	74.0	-23.5	3.15 H	37	39.5	11.0
2	11730.00	40.8 AV	54.0	-13.2	3.15 H	37	29.8	11.0
3	#17595.00	56.3 PK	88.2	-31.9	1.46 H	198	37.3	19.0
4	#17595.00	43.7 AV	68.2	-24.5	1.46 H	198	24.7	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	50.0 PK	74.0	-24.0	2.02 V	195	39.0	11.0
2	11730.00	40.7 AV	54.0	-13.3	2.02 V	195	29.7	11.0
3	#17595.00	56.1 PK	88.2	-32.1	1.39 V	87	37.1	19.0
4	#17595.00	43.4 AV	68.2	-24.8	1.39 V	87	24.4	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	50.6 PK	74.0	-23.4	3.10 H	31	39.7	10.9
2	11770.00	41.3 AV	54.0	-12.7	3.10 H	31	30.4	10.9
3	#17655.00	56.8 PK	88.2	-31.4	1.40 H	198	37.5	19.3
4	#17655.00	44.2 AV	68.2	-24.0	1.40 H	198	24.9	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	50.8 PK	74.0	-23.2	2.02 V	200	39.9	10.9
2	11770.00	41.2 AV	54.0	-12.8	2.02 V	200	30.3	10.9
3	#17655.00	55.4 PK	88.2	-32.8	1.48 V	90	36.1	19.3
4	#17655.00	43.2 AV	68.2	-25.0	1.48 V	90	23.9	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11670.00	51.1 PK	74.0	-22.9	3.21 H	50	39.9	11.2
2	11670.00	41.6 AV	54.0	-12.4	3.21 H	50	30.4	11.2
3	#17505.00	54.3 PK	88.2	-33.9	1.40 H	213	36.4	17.9
4	#17505.00	42.5 AV	68.2	-25.7	1.40 H	213	24.6	17.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11670.00	48.6 PK	74.0	-25.4	2.05 V	178	37.4	11.2
2	11670.00	38.7 AV	54.0	-15.3	2.05 V	178	27.5	11.2
3	#17505.00	55.0 PK	88.2	-33.2	1.55 V	42	37.1	17.9
4	#17505.00	43.2 AV	68.2	-25.0	1.55 V	42	25.3	17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11750.00	51.0 PK	74.0	-23.0	3.22 H	41	40.0	11.0
2	11750.00	41.4 AV	54.0	-12.6	3.22 H	41	30.4	11.0
3	#17625.00	54.0 PK	88.2	-34.2	1.39 H	221	34.8	19.2
4	#17625.00	42.1 AV	68.2	-26.1	1.39 H	221	22.9	19.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11750.00	51.6 PK	74.0	-22.4	2.08 V	195	40.6	11.0
2	11750.00	42.0 AV	54.0	-12.0	2.08 V	195	31.0	11.0
3	#17625.00	56.1 PK	88.2	-32.1	1.64 V	30	36.9	19.2
4	#17625.00	44.0 AV	68.2	-24.2	1.64 V	30	24.8	19.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	50.7 PK	74.0	-23.3	3.15 H	60	39.7	11.0
2	11710.00	41.2 AV	54.0	-12.8	3.15 H	60	30.2	11.0
3	#17565.00	54.0 PK	88.2	-34.2	1.44 H	219	35.3	18.7
4	#17565.00	42.1 AV	68.2	-26.1	1.44 H	219	23.4	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	50.7 PK	74.0	-23.3	2.10 V	183	39.7	11.0
2	11710.00	40.8 AV	54.0	-13.2	2.10 V	183	29.8	11.0
3	#17565.00	56.1 PK	88.2	-32.1	1.72 V	56	37.4	18.7
4	#17565.00	43.6 AV	68.2	-24.6	1.72 V	56	24.9	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	51.6 PK	74.0	-22.4	3.16 H	58	40.5	11.1
2	11630.00	42.1 AV	54.0	-11.9	3.16 H	58	31.0	11.1
3	#17445.00	54.7 PK	88.2	-33.5	1.36 H	225	37.3	17.4
4	#17445.00	42.7 AV	68.2	-25.5	1.36 H	225	25.3	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	51.2 PK	74.0	-22.8	2.08 V	193	40.1	11.1
2	11630.00	41.0 AV	54.0	-13.0	2.08 V	193	29.9	11.1
3	#17445.00	55.8 PK	88.2	-32.4	1.78 V	45	38.4	17.4
4	#17445.00	43.4 AV	68.2	-24.8	1.78 V	45	26.0	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	47.5 PK	74.0	-26.5	3.33 H	69	36.4	11.1
2	11690.00	38.0 AV	54.0	-16.0	3.33 H	69	26.9	11.1
3	#17535.00	54.9 PK	88.2	-33.3	1.52 H	194	36.6	18.3
4	#17535.00	43.1 AV	68.2	-25.1	1.52 H	194	24.8	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.2 PK	74.0	-25.8	1.96 V	223	37.1	11.1
2	11690.00	39.2 AV	54.0	-14.8	1.96 V	223	28.1	11.1
3	#17535.00	54.6 PK	88.2	-33.6	1.61 V	57	36.3	18.3
4	#17535.00	43.1 AV	68.2	-25.1	1.61 V	57	24.8	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.8 PK	74.0	-26.2	3.39 H	49	36.8	11.0
2	11730.00	38.6 AV	54.0	-15.4	3.39 H	49	27.6	11.0
3	#17595.00	55.6 PK	88.2	-32.6	1.52 H	197	36.6	19.0
4	#17595.00	43.6 AV	68.2	-24.6	1.52 H	197	24.6	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.9 PK	74.0	-26.1	2.03 V	217	36.9	11.0
2	11730.00	38.9 AV	54.0	-15.1	2.03 V	217	27.9	11.0
3	#17595.00	54.3 PK	88.2	-33.9	1.56 V	60	35.3	19.0
4	#17595.00	42.5 AV	68.2	-25.7	1.56 V	60	23.5	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	47.1 PK	74.0	-26.9	3.35 H	61	36.2	10.9
2	11770.00	37.9 AV	54.0	-16.1	3.35 H	61	27.0	10.9
3	#17655.00	55.5 PK	88.2	-32.7	1.52 H	196	36.2	19.3
4	#17655.00	43.6 AV	68.2	-24.6	1.52 H	196	24.3	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.3 PK	74.0	-25.7	1.93 V	218	37.4	10.9
2	11770.00	39.2 AV	54.0	-14.8	1.93 V	218	28.3	10.9
3	#17655.00	55.0 PK	88.2	-33.2	1.64 V	72	35.7	19.3
4	#17655.00	43.1 AV	68.2	-25.1	1.64 V	72	23.8	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	47.7 PK	74.0	-26.3	3.30 H	56	36.6	11.1
2	11690.00	38.3 AV	54.0	-15.7	3.30 H	56	27.2	11.1
3	#17535.00	55.4 PK	88.2	-32.8	1.43 H	189	37.1	18.3
4	#17535.00	43.0 AV	68.2	-25.2	1.43 H	189	24.7	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.1 PK	74.0	-25.9	2.01 V	230	37.0	11.1
2	11690.00	38.9 AV	54.0	-15.1	2.01 V	230	27.8	11.1
3	#17535.00	54.4 PK	88.2	-33.8	1.62 V	55	36.1	18.3
4	#17535.00	42.8 AV	68.2	-25.4	1.62 V	55	24.5	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.2 PK	74.0	-26.8	3.34 H	72	36.2	11.0
2	11730.00	38.0 AV	54.0	-16.0	3.34 H	72	27.0	11.0
3	#17595.00	55.5 PK	88.2	-32.7	1.50 H	171	36.5	19.0
4	#17595.00	43.6 AV	68.2	-24.6	1.50 H	171	24.6	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.5 PK	74.0	-25.5	2.04 V	220	37.5	11.0
2	11730.00	39.3 AV	54.0	-14.7	2.04 V	220	28.3	11.0
3	#17595.00	54.4 PK	88.2	-33.8	1.62 V	64	35.4	19.0
4	#17595.00	42.8 AV	68.2	-25.4	1.62 V	64	23.8	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	47.8 PK	74.0	-26.2	3.38 H	60	36.9	10.9
2	11770.00	38.7 AV	54.0	-15.3	3.38 H	60	27.8	10.9
3	#17655.00	55.4 PK	88.2	-32.8	1.51 H	170	36.1	19.3
4	#17655.00	43.6 AV	68.2	-24.6	1.51 H	170	24.3	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.5 PK	74.0	-25.5	2.03 V	211	37.6	10.9
2	11770.00	39.1 AV	54.0	-14.9	2.03 V	211	28.2	10.9
3	#17655.00	54.5 PK	88.2	-33.7	1.63 V	48	35.2	19.3
4	#17655.00	42.7 AV	68.2	-25.5	1.63 V	48	23.4	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	47.5 PK	74.0	-26.5	3.32 H	55	36.4	11.1
2	11690.00	38.0 AV	54.0	-16.0	3.32 H	55	26.9	11.1
3	#17535.00	55.7 PK	88.2	-32.5	1.48 H	197	37.4	18.3
4	#17535.00	43.6 AV	68.2	-24.6	1.48 H	197	25.3	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.0 PK	74.0	-26.0	1.93 V	227	36.9	11.1
2	11690.00	38.6 AV	54.0	-15.4	1.93 V	227	27.5	11.1
3	#17535.00	54.7 PK	88.2	-33.5	1.62 V	73	36.4	18.3
4	#17535.00	43.0 AV	68.2	-25.2	1.62 V	73	24.7	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.8 PK	74.0	-26.2	3.34 H	74	36.8	11.0
2	11730.00	38.3 AV	54.0	-15.7	3.34 H	74	27.3	11.0
3	#17595.00	55.8 PK	88.2	-32.4	1.50 H	200	36.8	19.0
4	#17595.00	43.6 AV	68.2	-24.6	1.50 H	200	24.6	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.2 PK	74.0	-25.8	1.94 V	232	37.2	11.0
2	11730.00	39.1 AV	54.0	-14.9	1.94 V	232	28.1	11.0
3	#17595.00	54.4 PK	88.2	-33.8	1.58 V	72	35.4	19.0
4	#17595.00	42.7 AV	68.2	-25.5	1.58 V	72	23.7	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	47.4 PK	74.0	-26.6	3.37 H	52	36.5	10.9
2	11770.00	38.4 AV	54.0	-15.6	3.37 H	52	27.5	10.9
3	#17655.00	55.4 PK	88.2	-32.8	1.50 H	190	36.1	19.3
4	#17655.00	43.5 AV	68.2	-24.7	1.50 H	190	24.2	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.4 PK	74.0	-25.6	1.98 V	216	37.5	10.9
2	11770.00	39.3 AV	54.0	-14.7	1.98 V	216	28.4	10.9
3	#17655.00	54.0 PK	88.2	-34.2	1.60 V	57	34.7	19.3
4	#17655.00	42.3 AV	68.2	-25.9	1.60 V	57	23.0	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	47.4 PK	74.0	-26.6	3.28 H	63	36.3	11.1
2	11690.00	38.1 AV	54.0	-15.9	3.28 H	63	27.0	11.1
3	#17535.00	55.1 PK	88.2	-33.1	1.48 H	187	36.8	18.3
4	#17535.00	42.8 AV	68.2	-25.4	1.48 H	187	24.5	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	49.0 PK	74.0	-25.0	2.01 V	220	37.9	11.1
2	11690.00	39.6 AV	54.0	-14.4	2.01 V	220	28.5	11.1
3	#17535.00	55.0 PK	88.2	-33.2	1.66 V	63	36.7	18.3
4	#17535.00	43.0 AV	68.2	-25.2	1.66 V	63	24.7	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.4 PK	74.0	-26.6	3.37 H	55	36.4	11.0
2	11730.00	37.8 AV	54.0	-16.2	3.37 H	55	26.8	11.0
3	#17595.00	54.7 PK	88.2	-33.5	1.52 H	181	35.7	19.0
4	#17595.00	42.8 AV	68.2	-25.4	1.52 H	181	23.8	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.4 PK	74.0	-25.6	1.96 V	223	37.4	11.0
2	11730.00	39.3 AV	54.0	-14.7	1.96 V	223	28.3	11.0
3	#17595.00	54.9 PK	88.2	-33.3	1.58 V	46	35.9	19.0
4	#17595.00	43.3 AV	68.2	-24.9	1.58 V	46	24.3	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	47.3 PK	74.0	-26.7	3.39 H	55	36.4	10.9
2	11770.00	37.8 AV	54.0	-16.2	3.39 H	55	26.9	10.9
3	#17655.00	55.1 PK	88.2	-33.1	1.45 H	198	35.8	19.3
4	#17655.00	43.3 AV	68.2	-24.9	1.45 H	198	24.0	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.6 PK	74.0	-25.4	2.04 V	210	37.7	10.9
2	11770.00	39.4 AV	54.0	-14.6	2.04 V	210	28.5	10.9
3	#17655.00	54.6 PK	88.2	-33.6	1.67 V	63	35.3	19.3
4	#17655.00	43.2 AV	68.2	-25.0	1.67 V	63	23.9	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	47.2 PK	74.0	-26.8	3.38 H	49	36.1	11.1
2	11690.00	38.0 AV	54.0	-16.0	3.38 H	49	26.9	11.1
3	#17535.00	54.8 PK	88.2	-33.4	1.53 H	171	36.5	18.3
4	#17535.00	43.0 AV	68.2	-25.2	1.53 H	171	24.7	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.7 PK	74.0	-25.3	1.97 V	203	37.6	11.1
2	11690.00	39.5 AV	54.0	-14.5	1.97 V	203	28.4	11.1
3	#17535.00	55.1 PK	88.2	-33.1	1.61 V	73	36.8	18.3
4	#17535.00	43.3 AV	68.2	-24.9	1.61 V	73	25.0	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.4 PK	74.0	-26.6	3.30 H	71	36.4	11.0
2	11730.00	38.3 AV	54.0	-15.7	3.30 H	71	27.3	11.0
3	#17595.00	55.3 PK	88.2	-32.9	1.52 H	170	36.3	19.0
4	#17595.00	43.0 AV	68.2	-25.2	1.52 H	170	24.0	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.8 PK	74.0	-26.2	2.03 V	219	36.8	11.0
2	11730.00	38.8 AV	54.0	-15.2	2.03 V	219	27.8	11.0
3	#17595.00	55.1 PK	88.2	-33.1	1.62 V	46	36.1	19.0
4	#17595.00	43.3 AV	68.2	-24.9	1.62 V	46	24.3	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	47.0 PK	74.0	-27.0	3.37 H	76	36.1	10.9
2	11770.00	37.8 AV	54.0	-16.2	3.37 H	76	26.9	10.9
3	#17655.00	55.0 PK	88.2	-33.2	1.49 H	174	35.7	19.3
4	#17655.00	43.0 AV	68.2	-25.2	1.49 H	174	23.7	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.7 PK	74.0	-25.3	1.98 V	227	37.8	10.9
2	11770.00	39.3 AV	54.0	-14.7	1.98 V	227	28.4	10.9
3	#17655.00	54.7 PK	88.2	-33.5	1.66 V	61	35.4	19.3
4	#17655.00	43.0 AV	68.2	-25.2	1.66 V	61	23.7	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	47.3 PK	74.0	-26.7	3.30 H	68	36.3	11.0
2	11710.00	38.2 AV	54.0	-15.8	3.30 H	68	27.2	11.0
3	#17565.00	54.8 PK	88.2	-33.4	1.46 H	195	36.1	18.7
4	#17565.00	42.8 AV	68.2	-25.4	1.46 H	195	24.1	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	48.4 PK	74.0	-25.6	2.01 V	202	37.4	11.0
2	11710.00	39.3 AV	54.0	-14.7	2.01 V	202	28.3	11.0
3	#17565.00	53.8 PK	88.2	-34.4	1.59 V	70	35.1	18.7
4	#17565.00	42.4 AV	68.2	-25.8	1.59 V	70	23.7	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	47.5 PK	74.0	-26.5	3.33 H	58	36.4	11.1
2	11630.00	38.4 AV	54.0	-15.6	3.33 H	58	27.3	11.1
3	#17445.00	55.1 PK	88.2	-33.1	1.42 H	196	37.7	17.4
4	#17445.00	42.7 AV	68.2	-25.5	1.42 H	196	25.3	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.5 PK	74.0	-25.5	1.92 V	202	37.4	11.1
2	11630.00	39.0 AV	54.0	-15.0	1.92 V	202	27.9	11.1
3	#17445.00	54.8 PK	88.2	-33.4	1.65 V	42	37.4	17.4
4	#17445.00	43.1 AV	68.2	-25.1	1.65 V	42	25.7	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	47.3 PK	74.0	-26.7	3.37 H	69	36.2	11.1
2	11630.00	37.7 AV	54.0	-16.3	3.37 H	69	26.6	11.1
3	#17445.00	55.7 PK	88.2	-32.5	1.51 H	174	38.3	17.4
4	#17445.00	43.6 AV	68.2	-24.6	1.51 H	174	26.2	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	47.9 PK	74.0	-26.1	1.95 V	210	36.8	11.1
2	11630.00	38.9 AV	54.0	-15.1	1.95 V	210	27.8	11.1
3	#17445.00	54.8 PK	88.2	-33.4	1.62 V	60	37.4	17.4
4	#17445.00	43.0 AV	68.2	-25.2	1.62 V	60	25.6	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

2TX

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.2 PK	74.0	-25.8	3.37 H	36	37.1	11.1
2	11690.00	38.2 AV	54.0	-15.8	3.37 H	36	27.1	11.1
3	#17535.00	55.3 PK	88.2	-32.9	1.49 H	183	37.0	18.3
4	#17535.00	43.1 AV	68.2	-25.1	1.49 H	183	24.8	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	47.9 PK	74.0	-26.1	2.05 V	186	36.8	11.1
2	11690.00	37.8 AV	54.0	-16.2	2.05 V	186	26.7	11.1
3	#17535.00	55.0 PK	88.2	-33.2	1.65 V	59	36.7	18.3
4	#17535.00	43.2 AV	68.2	-25.0	1.65 V	59	24.9	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.5 PK	74.0	-26.5	3.42 H	21	36.5	11.0
2	11730.00	37.8 AV	54.0	-16.2	3.42 H	21	26.8	11.0
3	#17595.00	54.9 PK	88.2	-33.3	1.46 H	196	35.9	19.0
4	#17595.00	42.9 AV	68.2	-25.3	1.46 H	196	23.9	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.3 PK	74.0	-25.7	1.98 V	209	37.3	11.0
2	11730.00	39.1 AV	54.0	-14.9	1.98 V	209	28.1	11.0
3	#17595.00	54.8 PK	88.2	-33.4	1.63 V	58	35.8	19.0
4	#17595.00	42.7 AV	68.2	-25.5	1.63 V	58	23.7	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.7 PK	74.0	-25.3	3.43 H	33	37.8	10.9
2	11770.00	38.4 AV	54.0	-15.6	3.43 H	33	27.5	10.9
3	#17655.00	55.5 PK	88.2	-32.7	1.52 H	194	36.2	19.3
4	#17655.00	43.2 AV	68.2	-25.0	1.52 H	194	23.9	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.2 PK	74.0	-25.8	2.01 V	208	37.3	10.9
2	11770.00	39.3 AV	54.0	-14.7	2.01 V	208	28.4	10.9
3	#17655.00	54.9 PK	88.2	-33.3	1.67 V	65	35.6	19.3
4	#17655.00	42.8 AV	68.2	-25.4	1.67 V	65	23.5	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.3 PK	74.0	-25.7	3.41 H	50	37.2	11.1
2	11690.00	38.1 AV	54.0	-15.9	3.41 H	50	27.0	11.1
3	#17535.00	54.9 PK	88.2	-33.3	1.54 H	168	36.6	18.3
4	#17535.00	42.9 AV	68.2	-25.3	1.54 H	168	24.6	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.3 PK	74.0	-25.7	1.96 V	228	37.2	11.1
2	11690.00	38.7 AV	54.0	-15.3	1.96 V	228	27.6	11.1
3	#17535.00	54.8 PK	88.2	-33.4	1.72 V	54	36.5	18.3
4	#17535.00	42.6 AV	68.2	-25.6	1.72 V	54	24.3	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.2 PK	74.0	-25.8	3.37 H	33	37.2	11.0
2	11730.00	38.2 AV	54.0	-15.8	3.37 H	33	27.2	11.0
3	#17595.00	55.4 PK	88.2	-32.8	1.50 H	187	36.4	19.0
4	#17595.00	43.3 AV	68.2	-24.9	1.50 H	187	24.3	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.8 PK	74.0	-26.2	1.99 V	238	36.8	11.0
2	11730.00	38.1 AV	54.0	-15.9	1.99 V	238	27.1	11.0
3	#17595.00	55.8 PK	88.2	-32.4	1.73 V	48	36.8	19.0
4	#17595.00	43.2 AV	68.2	-25.0	1.73 V	48	24.2	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.1 PK	74.0	-25.9	3.34 H	42	37.2	10.9
2	11770.00	38.0 AV	54.0	-16.0	3.34 H	42	27.1	10.9
3	#17655.00	55.6 PK	88.2	-32.6	1.44 H	177	36.3	19.3
4	#17655.00	43.3 AV	68.2	-24.9	1.44 H	177	24.0	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.6 PK	74.0	-25.4	2.06 V	208	37.7	10.9
2	11770.00	38.5 AV	54.0	-15.5	2.06 V	208	27.6	10.9
3	#17655.00	54.9 PK	88.2	-33.3	1.72 V	51	35.6	19.3
4	#17655.00	42.7 AV	68.2	-25.5	1.72 V	51	23.4	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11670.00	48.5 PK	74.0	-25.5	3.33 H	49	37.3	11.2
2	11670.00	38.3 AV	54.0	-15.7	3.33 H	49	27.1	11.2
3	#17505.00	55.1 PK	88.2	-33.1	1.45 H	181	37.2	17.9
4	#17505.00	42.7 AV	68.2	-25.5	1.45 H	181	24.8	17.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11670.00	48.3 PK	74.0	-25.7	1.99 V	233	37.1	11.2
2	11670.00	38.8 AV	54.0	-15.2	1.99 V	233	27.6	11.2
3	#17505.00	54.9 PK	88.2	-33.3	1.67 V	37	37.0	17.9
4	#17505.00	42.4 AV	68.2	-25.8	1.67 V	37	24.5	17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11750.00	49.0 PK	74.0	-25.0	3.40 H	44	38.0	11.0
2	11750.00	38.7 AV	54.0	-15.3	3.40 H	44	27.7	11.0
3	#17625.00	54.9 PK	88.2	-33.3	1.51 H	197	35.7	19.2
4	#17625.00	42.9 AV	68.2	-25.3	1.51 H	197	23.7	19.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11750.00	47.9 PK	74.0	-26.1	2.00 V	211	36.9	11.0
2	11750.00	38.4 AV	54.0	-15.6	2.00 V	211	27.4	11.0
3	#17625.00	54.7 PK	88.2	-33.5	1.66 V	53	35.5	19.2
4	#17625.00	42.5 AV	68.2	-25.7	1.66 V	53	23.3	19.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	47.9 PK	74.0	-26.1	3.42 H	47	36.9	11.0
2	11710.00	38.1 AV	54.0	-15.9	3.42 H	47	27.1	11.0
3	#17565.00	55.2 PK	88.2	-33.0	1.54 H	173	36.5	18.7
4	#17565.00	42.8 AV	68.2	-25.4	1.54 H	173	24.1	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	47.9 PK	74.0	-26.1	1.87 V	196	36.9	11.0
2	11710.00	38.8 AV	54.0	-15.2	1.87 V	196	27.8	11.0
3	#17565.00	55.3 PK	88.2	-32.9	1.51 V	76	36.6	18.7
4	#17565.00	43.3 AV	68.2	-24.9	1.51 V	76	24.6	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.9 PK	74.0	-25.1	3.34 H	34	37.8	11.1
2	11630.00	38.7 AV	54.0	-15.3	3.34 H	34	27.6	11.1
3	#17445.00	55.2 PK	88.2	-33.0	1.45 H	185	37.8	17.4
4	#17445.00	43.2 AV	68.2	-25.0	1.45 H	185	25.8	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	47.6 PK	74.0	-26.4	1.87 V	202	36.5	11.1
2	11630.00	38.7 AV	54.0	-15.3	1.87 V	202	27.6	11.1
3	#17445.00	55.6 PK	88.2	-32.6	1.54 V	73	38.2	17.4
4	#17445.00	43.6 AV	68.2	-24.6	1.54 V	73	26.2	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.6 PK	74.0	-25.4	3.03 H	16	37.5	11.1
2	11690.00	40.4 AV	54.0	-13.6	3.03 H	16	29.3	11.1
3	#17535.00	54.3 PK	88.2	-33.9	1.50 H	222	36.0	18.3
4	#17535.00	43.5 AV	68.2	-24.7	1.50 H	222	25.2	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	50.3 PK	74.0	-23.7	1.96 V	183	39.2	11.1
2	11690.00	41.6 AV	54.0	-12.4	1.96 V	183	30.5	11.1
3	#17535.00	54.8 PK	88.2	-33.4	1.44 V	57	36.5	18.3
4	#17535.00	43.6 AV	68.2	-24.6	1.44 V	57	25.3	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.1 PK	74.0	-25.9	3.02 H	17	37.1	11.0
2	11730.00	40.1 AV	54.0	-13.9	3.02 H	17	29.1	11.0
3	#17595.00	54.8 PK	88.2	-33.4	1.42 H	240	35.8	19.0
4	#17595.00	43.6 AV	68.2	-24.6	1.42 H	240	24.6	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	50.9 PK	74.0	-23.1	1.96 V	195	39.9	11.0
2	11730.00	42.0 AV	54.0	-12.0	1.96 V	195	31.0	11.0
3	#17595.00	55.1 PK	88.2	-33.1	1.38 V	56	36.1	19.0
4	#17595.00	43.9 AV	68.2	-24.3	1.38 V	56	24.9	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.5 PK	74.0	-25.5	3.02 H	19	37.6	10.9
2	11770.00	40.2 AV	54.0	-13.8	3.02 H	19	29.3	10.9
3	#17655.00	55.0 PK	88.2	-33.2	1.39 H	232	35.7	19.3
4	#17655.00	44.2 AV	68.2	-24.0	1.39 H	232	24.9	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	50.0 PK	74.0	-24.0	1.96 V	195	39.1	10.9
2	11770.00	41.4 AV	54.0	-12.6	1.96 V	195	30.5	10.9
3	#17655.00	54.9 PK	88.2	-33.3	1.43 V	41	35.6	19.3
4	#17655.00	43.9 AV	68.2	-24.3	1.43 V	41	24.6	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	47.8 PK	74.0	-26.2	3.10 H	22	36.7	11.1
2	11690.00	39.6 AV	54.0	-14.4	3.10 H	22	28.5	11.1
3	#17535.00	54.5 PK	88.2	-33.7	1.46 H	230	36.2	18.3
4	#17535.00	43.5 AV	68.2	-24.7	1.46 H	230	25.2	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	49.2 PK	74.0	-24.8	1.89 V	274	38.1	11.1
2	11690.00	41.7 AV	54.0	-12.3	1.89 V	274	30.6	11.1
3	#17535.00	54.8 PK	88.2	-33.4	1.55 V	15	36.5	18.3
4	#17535.00	43.6 AV	68.2	-24.6	1.55 V	15	25.3	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.7 PK	74.0	-26.3	3.13 H	24	36.7	11.0
2	11730.00	39.6 AV	54.0	-14.4	3.13 H	24	28.6	11.0
3	#17595.00	54.8 PK	88.2	-33.4	1.42 H	221	35.8	19.0
4	#17595.00	43.8 AV	68.2	-24.4	1.42 H	221	24.8	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	49.3 PK	74.0	-24.7	1.92 V	270	38.3	11.0
2	11730.00	42.1 AV	54.0	-11.9	1.92 V	270	31.1	11.0
3	#17595.00	54.5 PK	88.2	-33.7	1.56 V	20	35.5	19.0
4	#17595.00	43.5 AV	68.2	-24.7	1.56 V	20	24.5	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	47.9 PK	74.0	-26.1	3.03 H	35	37.0	10.9
2	11770.00	39.8 AV	54.0	-14.2	3.03 H	35	28.9	10.9
3	#17655.00	54.7 PK	88.2	-33.5	1.39 H	243	35.4	19.3
4	#17655.00	43.6 AV	68.2	-24.6	1.39 H	243	24.3	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	49.2 PK	74.0	-24.8	1.84 V	259	38.3	10.9
2	11770.00	41.9 AV	54.0	-12.1	1.84 V	259	31.0	10.9
3	#17655.00	54.6 PK	88.2	-33.6	1.56 V	19	35.3	19.3
4	#17655.00	43.4 AV	68.2	-24.8	1.56 V	19	24.1	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.6 PK	74.0	-25.4	3.09 H	26	37.5	11.1
2	11690.00	40.3 AV	54.0	-13.7	3.09 H	26	29.2	11.1
3	#17535.00	54.5 PK	88.2	-33.7	1.41 H	219	36.2	18.3
4	#17535.00	43.4 AV	68.2	-24.8	1.41 H	219	25.1	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	49.2 PK	74.0	-24.8	1.77 V	159	38.1	11.1
2	11690.00	41.1 AV	54.0	-12.9	1.77 V	159	30.0	11.1
3	#17535.00	52.2 PK	88.2	-36.0	1.51 V	85	33.9	18.3
4	#17535.00	43.1 AV	68.2	-25.1	1.51 V	85	24.8	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.7 PK	74.0	-26.3	3.10 H	28	36.7	11.0
2	11730.00	39.8 AV	54.0	-14.2	3.10 H	28	28.8	11.0
3	#17595.00	54.9 PK	88.2	-33.3	1.47 H	230	35.9	19.0
4	#17595.00	44.1 AV	68.2	-24.1	1.47 H	230	25.1	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	49.3 PK	74.0	-24.7	1.77 V	168	38.3	11.0
2	11730.00	41.5 AV	54.0	-12.5	1.77 V	168	30.5	11.0
3	#17595.00	52.7 PK	88.2	-35.5	1.48 V	85	33.7	19.0
4	#17595.00	43.3 AV	68.2	-24.9	1.48 V	85	24.3	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.4 PK	74.0	-25.6	3.06 H	14	37.5	10.9
2	11770.00	40.5 AV	54.0	-13.5	3.06 H	14	29.6	10.9
3	#17655.00	54.4 PK	88.2	-33.8	1.48 H	242	35.1	19.3
4	#17655.00	43.3 AV	68.2	-24.9	1.48 H	242	24.0	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	49.6 PK	74.0	-24.4	1.73 V	183	38.7	10.9
2	11770.00	41.7 AV	54.0	-12.3	1.73 V	183	30.8	10.9
3	#17655.00	52.9 PK	88.2	-35.3	1.50 V	79	33.6	19.3
4	#17655.00	43.2 AV	68.2	-25.0	1.50 V	79	23.9	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.6 PK	74.0	-25.4	3.06 H	10	37.5	11.1
2	11690.00	40.4 AV	54.0	-13.6	3.06 H	10	29.3	11.1
3	#17535.00	54.2 PK	88.2	-34.0	1.47 H	223	35.9	18.3
4	#17535.00	43.5 AV	68.2	-24.7	1.47 H	223	25.2	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	49.5 PK	74.0	-24.5	1.73 V	184	38.4	11.1
2	11690.00	41.9 AV	54.0	-12.1	1.73 V	184	30.8	11.1
3	#17535.00	52.6 PK	88.2	-35.6	1.45 V	89	34.3	18.3
4	#17535.00	43.3 AV	68.2	-24.9	1.45 V	89	25.0	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.1 PK	74.0	-25.9	3.03 H	20	37.1	11.0
2	11730.00	40.1 AV	54.0	-13.9	3.03 H	20	29.1	11.0
3	#17595.00	54.6 PK	88.2	-33.6	1.41 H	230	35.6	19.0
4	#17595.00	43.7 AV	68.2	-24.5	1.41 H	230	24.7	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	49.1 PK	74.0	-24.9	1.78 V	164	38.1	11.0
2	11730.00	41.4 AV	54.0	-12.6	1.78 V	164	30.4	11.0
3	#17595.00	52.7 PK	88.2	-35.5	1.50 V	96	33.7	19.0
4	#17595.00	43.1 AV	68.2	-25.1	1.50 V	96	24.1	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.5 PK	74.0	-25.5	3.09 H	3	37.6	10.9
2	11770.00	40.2 AV	54.0	-13.8	3.09 H	3	29.3	10.9
3	#17655.00	54.9 PK	88.2	-33.3	1.43 H	218	35.6	19.3
4	#17655.00	43.8 AV	68.2	-24.4	1.43 H	218	24.5	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	49.5 PK	74.0	-24.5	1.74 V	179	38.6	10.9
2	11770.00	41.6 AV	54.0	-12.4	1.74 V	179	30.7	10.9
3	#17655.00	52.2 PK	88.2	-36.0	1.42 V	100	32.9	19.3
4	#17655.00	42.9 AV	68.2	-25.3	1.42 V	100	23.6	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.0 PK	74.0	-26.0	3.14 H	1	36.9	11.1
2	11690.00	40.0 AV	54.0	-14.0	3.14 H	1	28.9	11.1
3	#17535.00	54.2 PK	88.2	-34.0	1.42 H	218	35.9	18.3
4	#17535.00	43.3 AV	68.2	-24.9	1.42 H	218	25.0	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	49.3 PK	74.0	-24.7	1.72 V	179	38.2	11.1
2	11690.00	41.6 AV	54.0	-12.4	1.72 V	179	30.5	11.1
3	#17535.00	53.0 PK	88.2	-35.2	1.45 V	79	34.7	18.3
4	#17535.00	43.4 AV	68.2	-24.8	1.45 V	79	25.1	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.1 PK	74.0	-25.9	3.14 H	26	37.1	11.0
2	11730.00	40.1 AV	54.0	-13.9	3.14 H	26	29.1	11.0
3	#17595.00	54.0 PK	88.2	-34.2	1.49 H	244	35.0	19.0
4	#17595.00	43.4 AV	68.2	-24.8	1.49 H	244	24.4	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	49.0 PK	74.0	-25.0	1.74 V	177	38.0	11.0
2	11730.00	41.2 AV	54.0	-12.8	1.74 V	177	30.2	11.0
3	#17595.00	52.7 PK	88.2	-35.5	1.53 V	83	33.7	19.0
4	#17595.00	43.3 AV	68.2	-24.9	1.53 V	83	24.3	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.4 PK	74.0	-25.6	3.05 H	13	37.5	10.9
2	11770.00	40.3 AV	54.0	-13.7	3.05 H	13	29.4	10.9
3	#17655.00	54.5 PK	88.2	-33.7	1.44 H	221	35.2	19.3
4	#17655.00	43.9 AV	68.2	-24.3	1.44 H	221	24.6	19.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.9 PK	74.0	-25.1	1.71 V	176	38.0	10.9
2	11770.00	41.3 AV	54.0	-12.7	1.71 V	176	30.4	10.9
3	#17655.00	52.3 PK	88.2	-35.9	1.45 V	79	33.0	19.3
4	#17655.00	43.1 AV	68.2	-25.1	1.45 V	79	23.8	19.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	48.4 PK	74.0	-25.6	3.13 H	26	37.4	11.0
2	11710.00	40.4 AV	54.0	-13.6	3.13 H	26	29.4	11.0
3	#17565.00	55.2 PK	88.2	-33.0	1.45 H	236	36.5	18.7
4	#17565.00	44.1 AV	68.2	-24.1	1.45 H	236	25.4	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	49.2 PK	74.0	-24.8	1.77 V	172	38.2	11.0
2	11710.00	41.2 AV	54.0	-12.8	1.77 V	172	30.2	11.0
3	#17565.00	53.3 PK	88.2	-34.9	1.50 V	76	34.6	18.7
4	#17565.00	43.7 AV	68.2	-24.5	1.50 V	76	25.0	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.0 PK	74.0	-26.0	3.04 H	26	36.9	11.1
2	11630.00	39.6 AV	54.0	-14.4	3.04 H	26	28.5	11.1
3	#17445.00	54.9 PK	88.2	-33.3	1.39 H	236	37.5	17.4
4	#17445.00	43.9 AV	68.2	-24.3	1.39 H	236	26.5	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	49.2 PK	74.0	-24.8	1.81 V	183	38.1	11.1
2	11630.00	41.4 AV	54.0	-12.6	1.81 V	183	30.3	11.1
3	#17445.00	53.0 PK	88.2	-35.2	1.42 V	96	35.6	17.4
4	#17445.00	43.7 AV	68.2	-24.5	1.42 V	96	26.3	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	47.9 PK	74.0	-26.1	3.10 H	25	36.8	11.1
2	11630.00	39.7 AV	54.0	-14.3	3.10 H	25	28.6	11.1
3	#17445.00	54.2 PK	88.2	-34.0	1.49 H	222	36.8	17.4
4	#17445.00	43.2 AV	68.2	-25.0	1.49 H	222	25.8	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	49.4 PK	74.0	-24.6	1.73 V	163	38.3	11.1
2	11630.00	41.7 AV	54.0	-12.3	1.73 V	163	30.6	11.1
3	#17445.00	52.9 PK	88.2	-35.3	1.54 V	72	35.5	17.4
4	#17445.00	43.7 AV	68.2	-24.5	1.54 V	72	26.3	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---