



|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | #1746.67        | 43.58 PK                | 88.26          | -44.68      | -71.9                   | -60.35                  | 8.37                   | -51.68           |
| 2                            | #1746.67        | 41.68 AV                | 68.26          | -26.58      | -85.61                  | -61.96                  | 8.37                   | -53.58           |
| 3                            | 7275.42         | 38.27 PK                | 74             | -35.73      | -68.84                  | -67.95                  | 8.37                   | -56.99           |
| 4                            | 7275.42         | 26.31 AV                | 54             | -27.69      | -82.61                  | -78.85                  | 8.37                   | -68.95           |
| 5                            | 19054.3         | 39.45 PK                | 74             | -34.55      | -68.69                  | -66.07                  | 8.37                   | -55.81           |
| 6                            | 19054.3         | 28.67 AV                | 54             | -25.33      | -76.74                  | -79.7                   | 8.37                   | -66.59           |
| 7                            | 23849.2         | 41.04 PK                | 74             | -32.96      | -65.84                  | -65.38                  | 8.37                   | -54.22           |
| 8                            | 23849.2         | 30.38 AV                | 54             | -23.62      | -75.39                  | -77.36                  | 8.37                   | -64.88           |
| 9                            | 39558.4         | 36.02 PK                | 74             | -37.98      | -71.1                   | -70.19                  | 8.37                   | -59.24           |
| 10                           | 39558.4         | 25.01 AV                | 54             | -28.99      | -83.63                  | -80.26                  | 8.37                   | -70.25           |

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

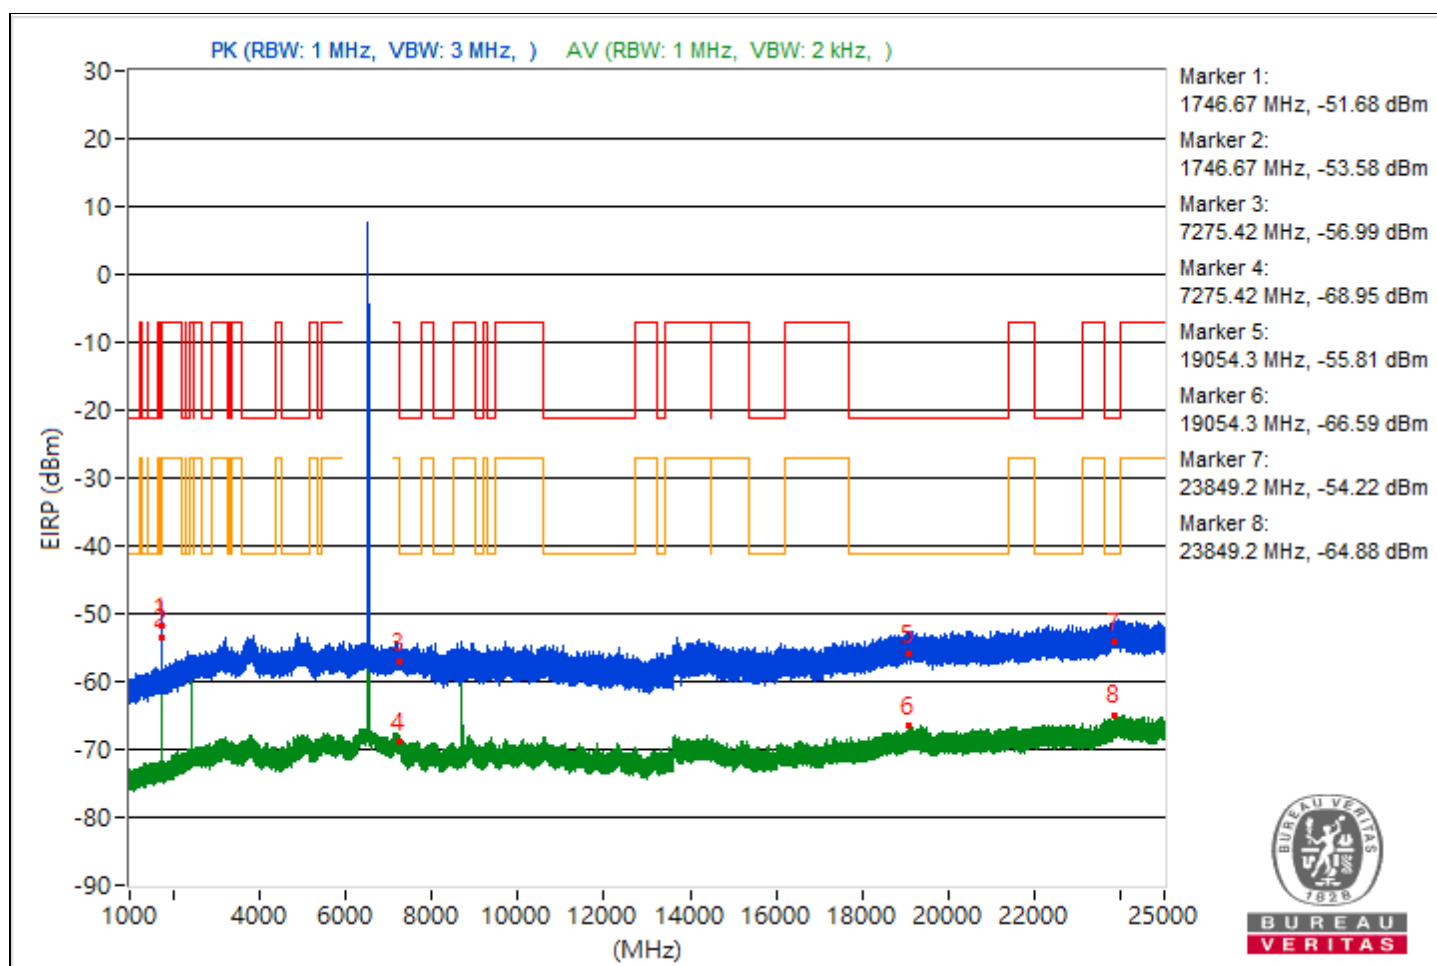

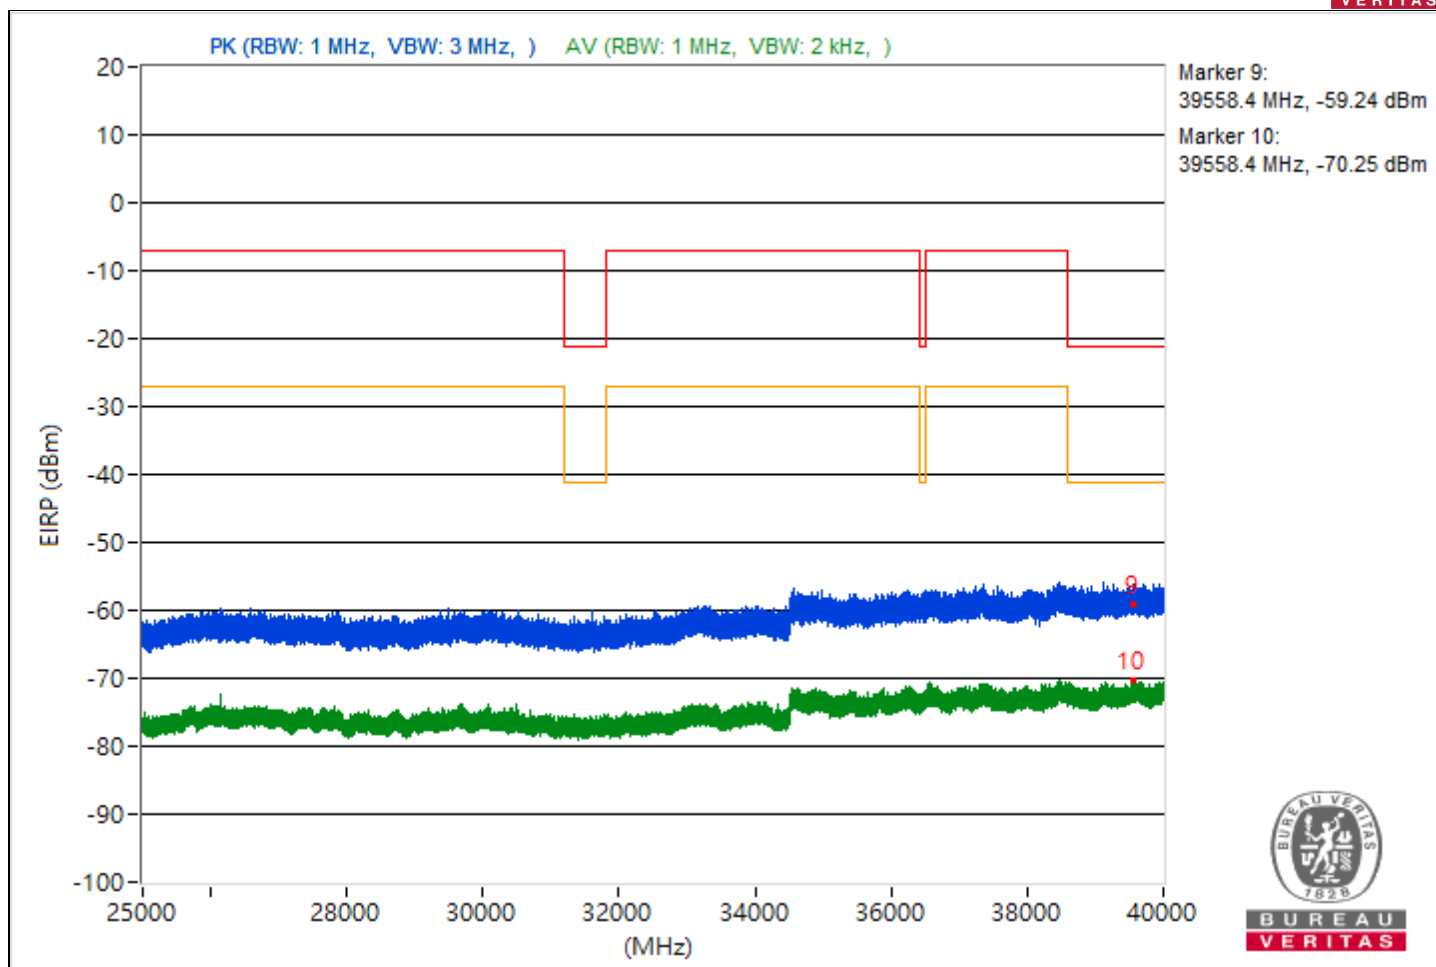



|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | #5787.38        | 37.95 PK                | 88.26          | -50.31      | -68.85                  | -68.54                  | 8.37                   | -57.31           |
| 2                            | #5787.38        | 40.28 AV                | 68.26          | -27.98      | -63.41                  | -81.72                  | 8.37                   | -54.98           |
| 3                            | 9166.67         | 44 PK                   | 74             | -30         | -60.22                  | -68.57                  | 8.37                   | -51.26           |
| 4                            | 9166.67         | 34.23 AV                | 54             | -19.77      | -69.95                  | -78.65                  | 8.37                   | -61.03           |
| 5                            | 19093.6         | 41.09 PK                | 74             | -32.91      | -65.67                  | -65.44                  | 8.37                   | -54.17           |
| 6                            | 19093.6         | 28.1 AV                 | 54             | -25.9       | -77.24                  | -80.39                  | 8.37                   | -67.16           |
| 7                            | 23936.8         | 43.1 PK                 | 74             | -30.9       | -63.28                  | -63.82                  | 8.37                   | -52.16           |
| 8                            | 23936.8         | 29.8 AV                 | 54             | -24.2       | -75.64                  | -78.52                  | 8.37                   | -65.46           |
| 9                            | 39752.09        | 35.63 PK                | 74             | -38.37      | -70.78                  | -71.25                  | 8.37                   | -59.63           |
| 10                           | 39752.09        | 24.59 AV                | 54             | -29.41      | -80.74                  | -83.92                  | 8.37                   | -70.67           |

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

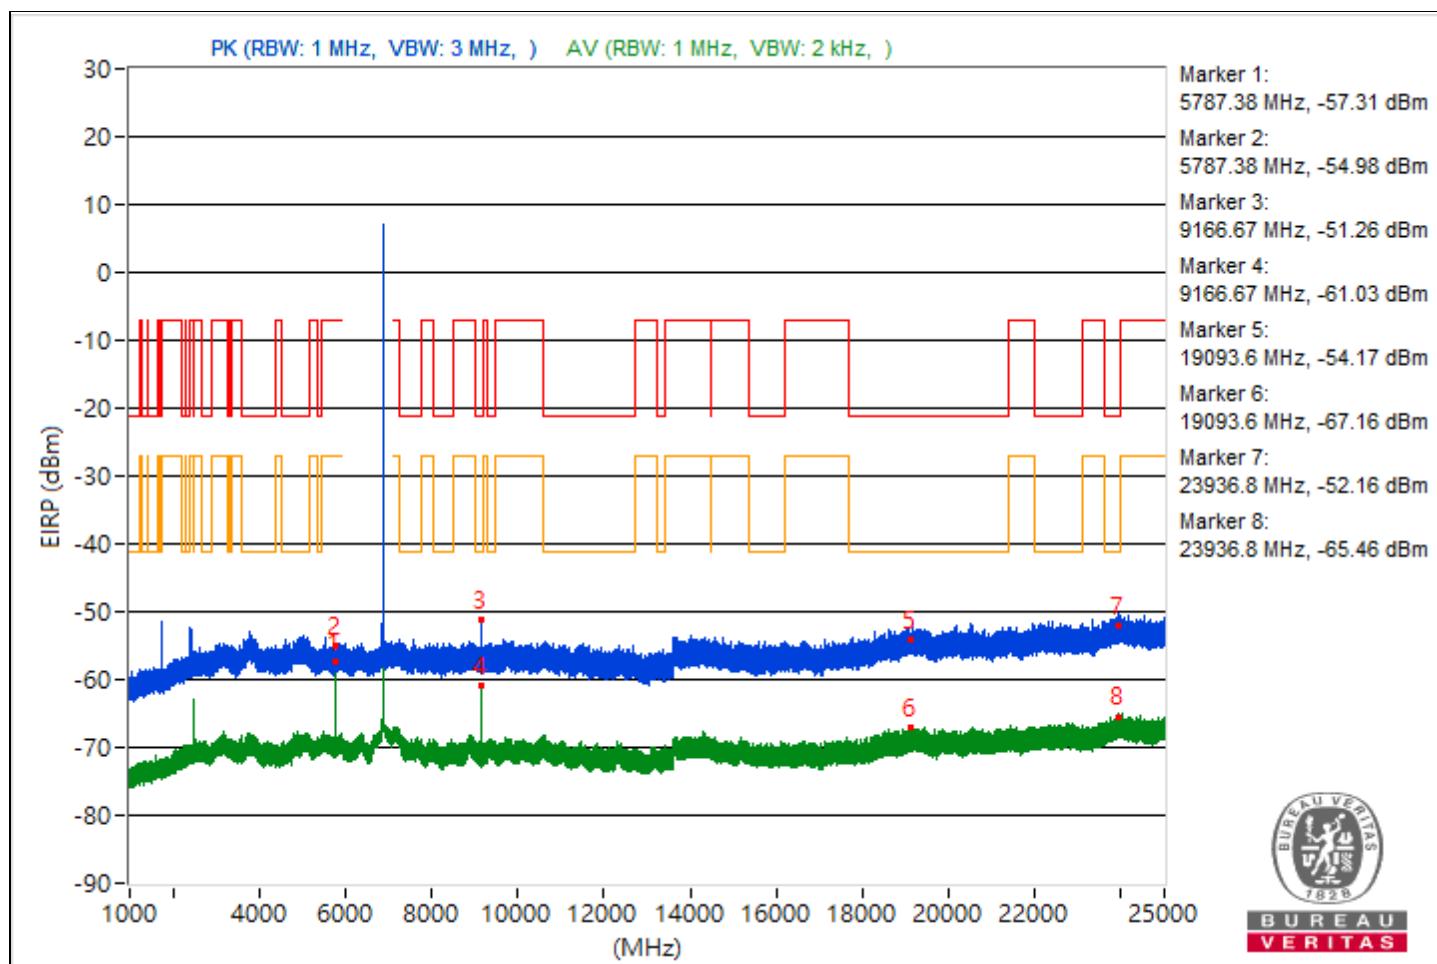


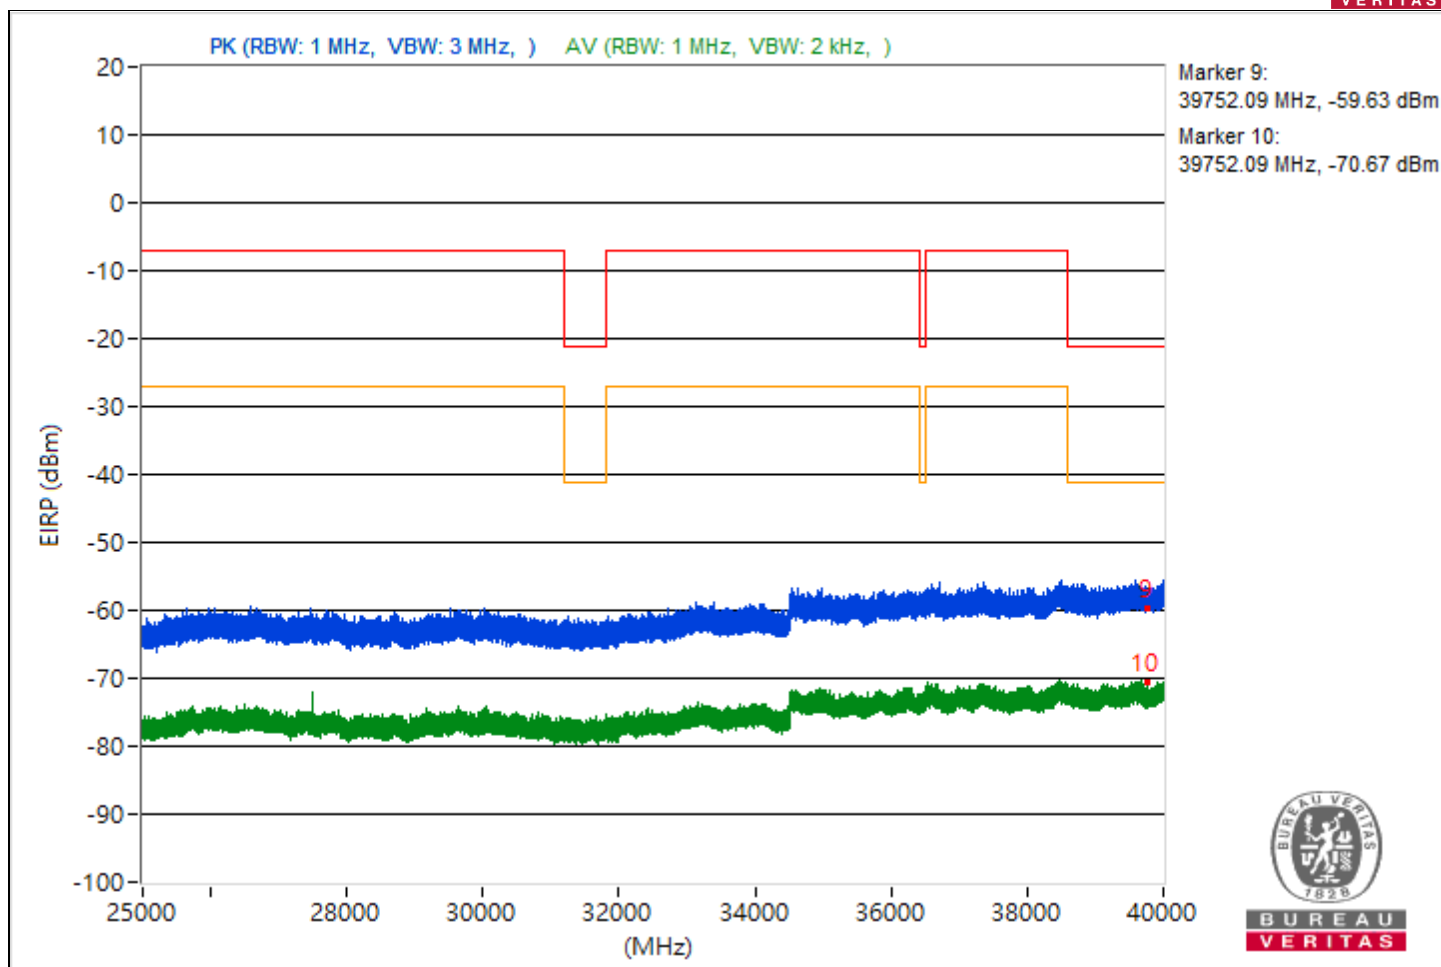


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3795.57         | 39.85 PK                | 74             | -34.15      | -67.61                  | -66.11                  | 8.37                   | -55.41           |
| 2                            | 3795.57         | 27.35 AV                | 54             | -26.65      | -78.46                  | -80.32                  | 8.37                   | -67.91           |
| 3                            | 9326.58         | 40.79 PK                | 74             | -33.21      | -64.38                  | -68.1                   | 8.37                   | -54.47           |
| 4                            | 9326.58         | 33.77 AV                | 54             | -20.23      | -70.53                  | -78.26                  | 8.37                   | -61.49           |
| 5                            | 18446.6         | 40.92 PK                | 74             | -33.08      | -67.04                  | -64.71                  | 8.37                   | -54.34           |
| 6                            | 18446.6         | 28.27 AV                | 54             | -25.73      | -80.39                  | -77                     | 8.37                   | -66.99           |
| 7                            | 23931.7         | 42.27 PK                | 74             | -31.73      | -65.44                  | -63.51                  | 8.37                   | -52.99           |
| 8                            | 23931.7         | 30.38 AV                | 54             | -23.62      | -78.96                  | -74.61                  | 8.37                   | -64.88           |
| 9                            | 39169.42        | 36.39 PK                | 74             | -37.61      | -70.02                  | -70.49                  | 8.37                   | -58.87           |
| 10                           | 39169.42        | 25.16 AV                | 54             | -28.84      | -80.67                  | -82.47                  | 8.37                   | -70.1            |

Note: Margin value = Emission Level - Limit value

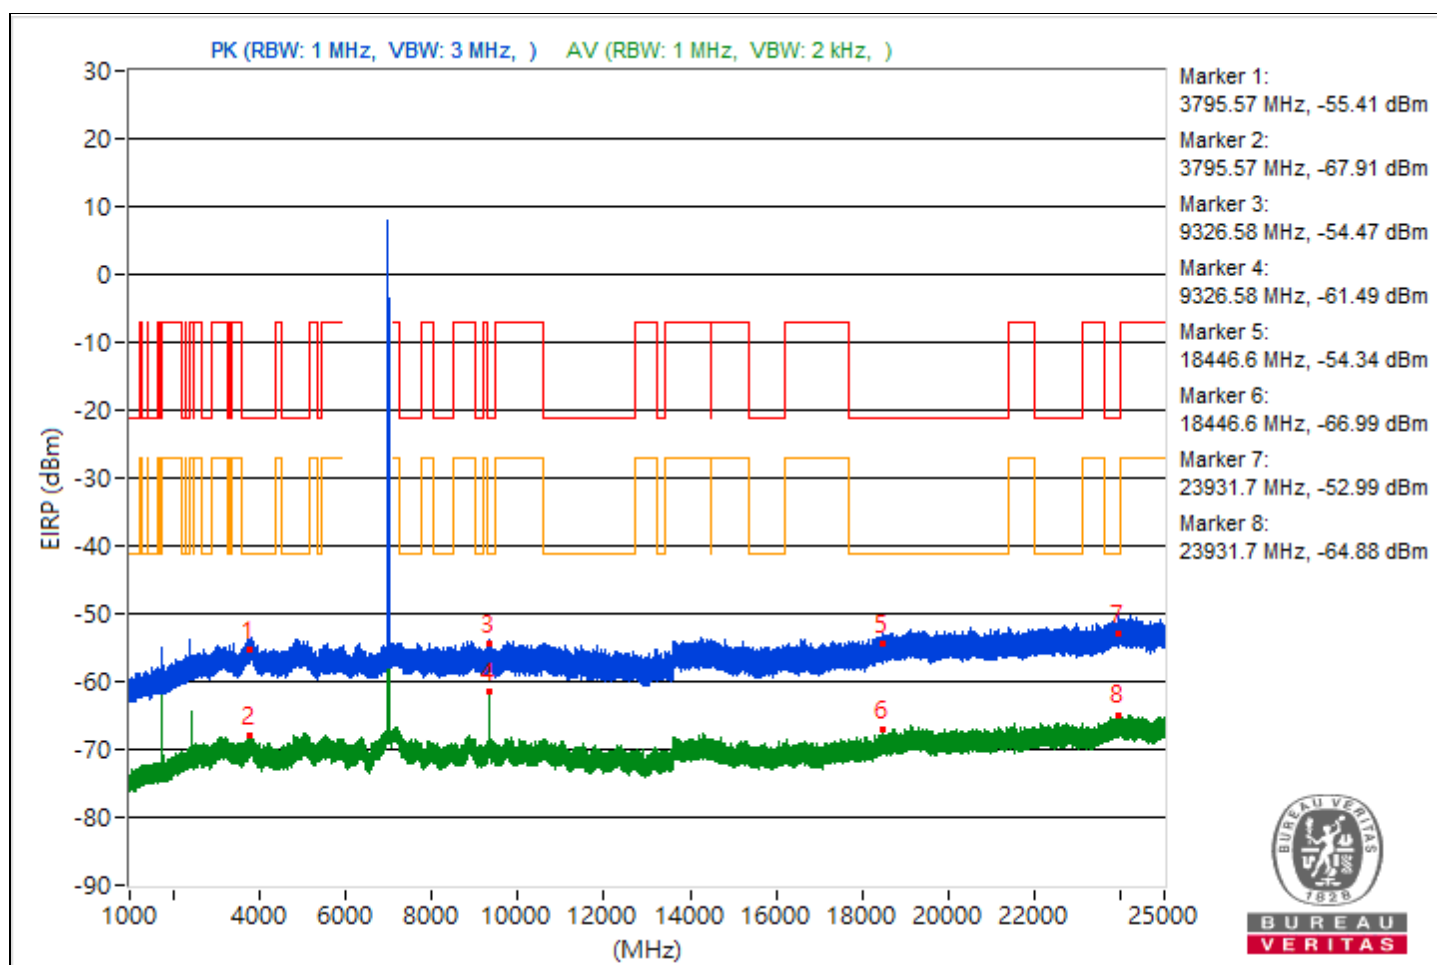

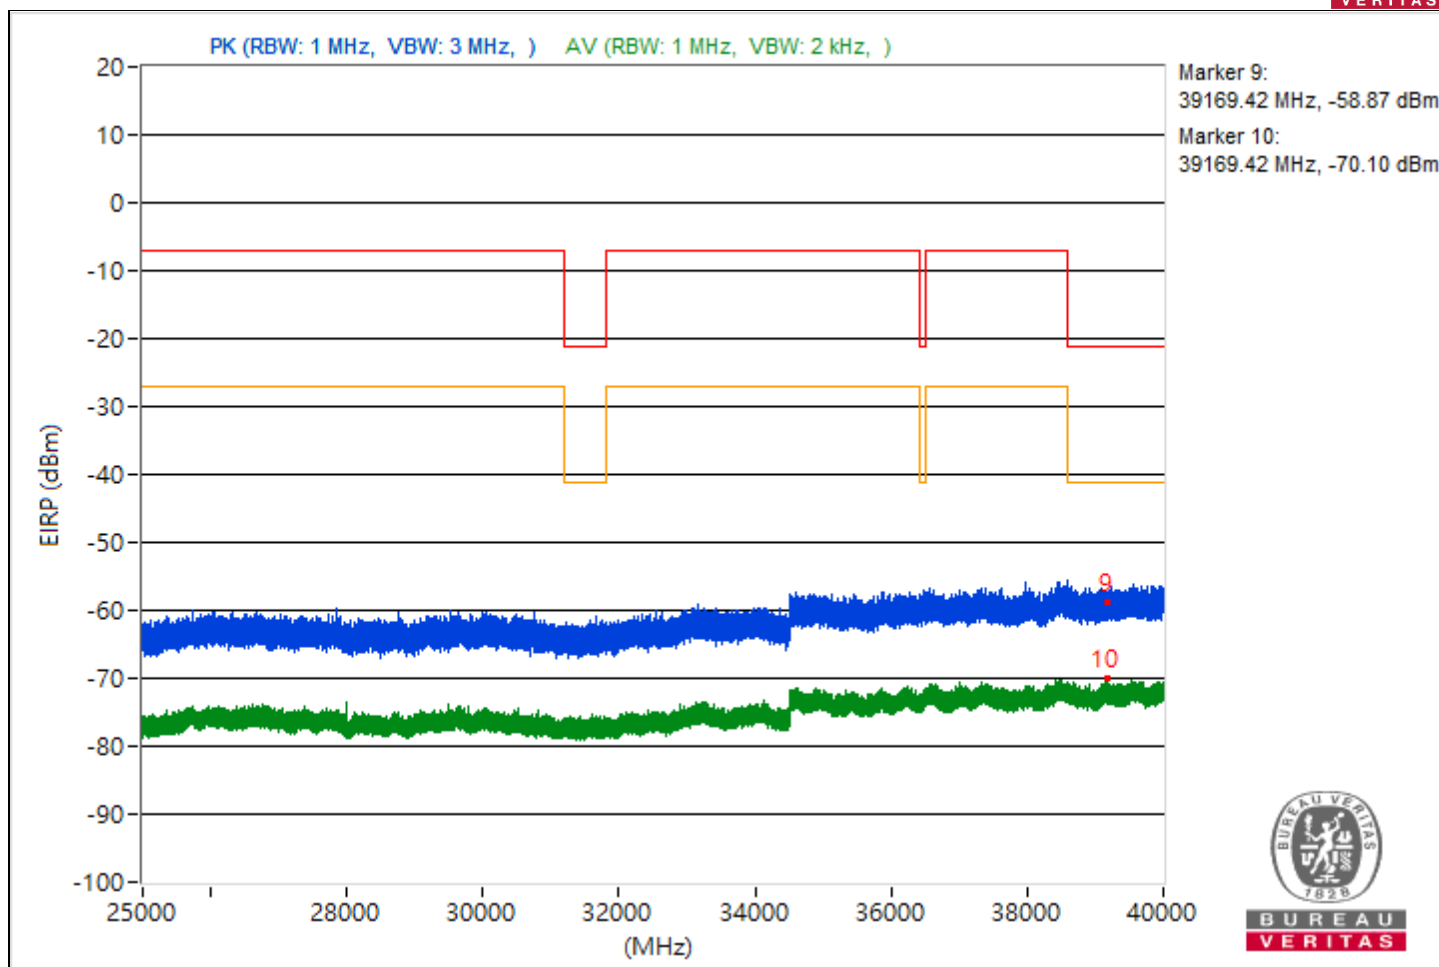



|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | #1752.89        | 36.31 PK                | 88.26          | -51.95      | -72.03                  | -69.11                  | 8.37                   | -58.95           |
| 2                            | #1752.89        | 40.24 AV                | 68.26          | -28.02      | -84.66                  | -63.43                  | 8.37                   | -55.02           |
| 3                            | 9486.31         | 39.64 PK                | 74             | -34.36      | -65.97                  | -68.34                  | 8.37                   | -55.62           |
| 4                            | 9486.31         | 30.36 AV                | 54             | -23.64      | -73.9                   | -82.01                  | 8.37                   | -64.9            |
| 5                            | 20879.8         | 38.71 PK                | 74             | -35.29      | -67.55                  | -68.34                  | 8.37                   | -56.55           |
| 6                            | 20879.8         | 28.16 AV                | 54             | -25.84      | -79.69                  | -77.53                  | 8.37                   | -67.1            |
| 7                            | 23995.9         | 41.33 PK                | 74             | -32.67      | -64.69                  | -66.03                  | 8.37                   | -53.93           |
| 8                            | 23995.9         | 29.71 AV                | 54             | -24.29      | -78.62                  | -75.71                  | 8.37                   | -65.55           |
| 9                            | 39579.82        | 37.18 PK                | 74             | -36.82      | -68.32                  | -71.03                  | 8.37                   | -58.08           |
| 10                           | 39579.82        | 24.63 AV                | 54             | -29.37      | -84.4                   | -80.48                  | 8.37                   | -70.63           |

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

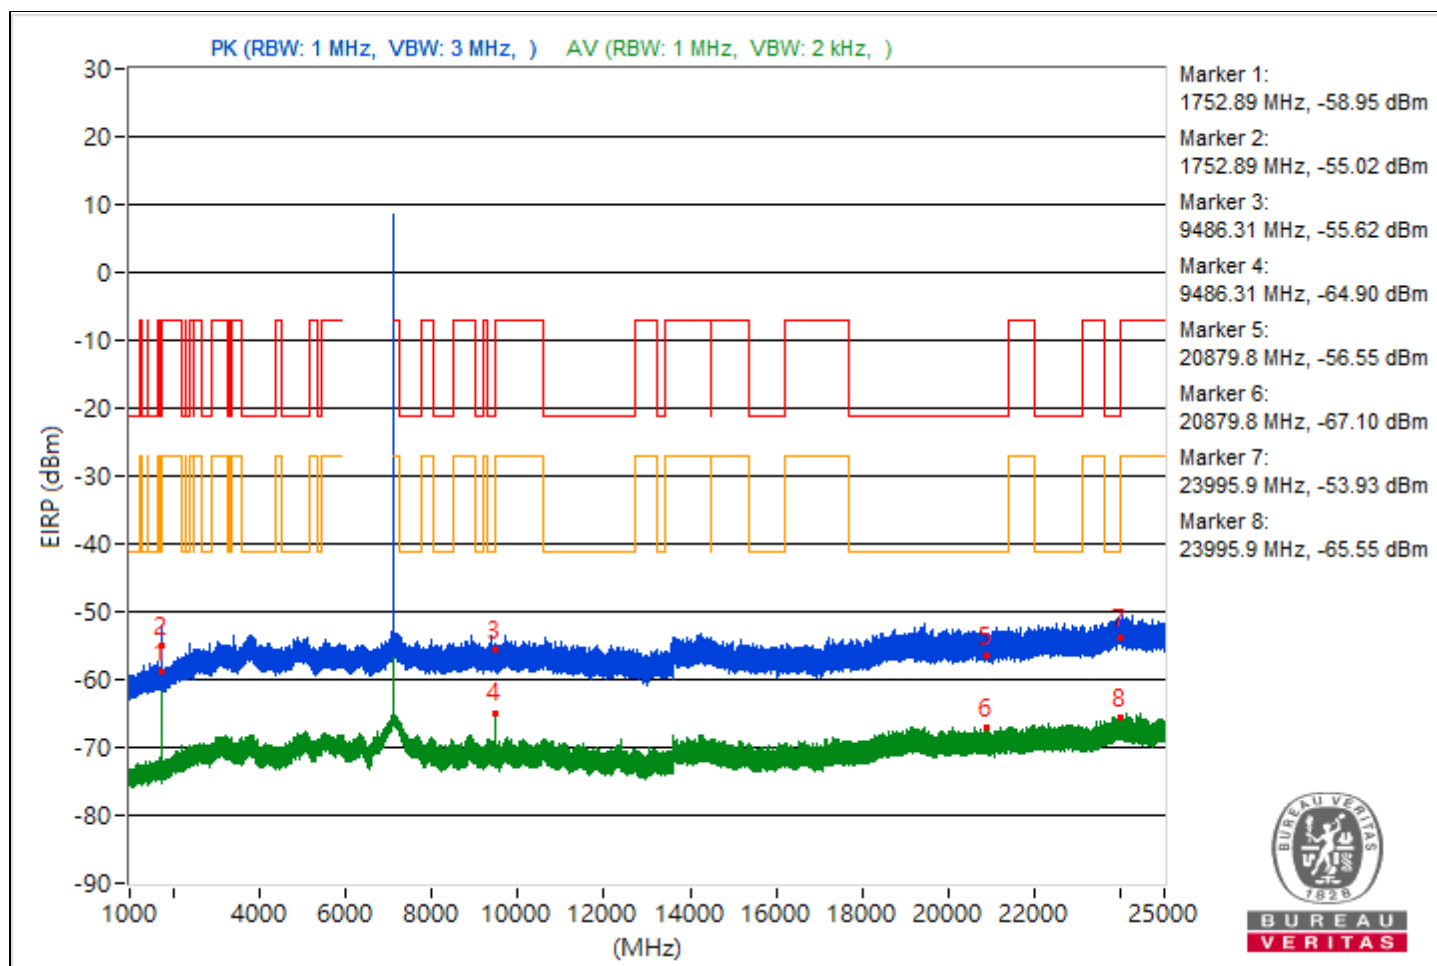

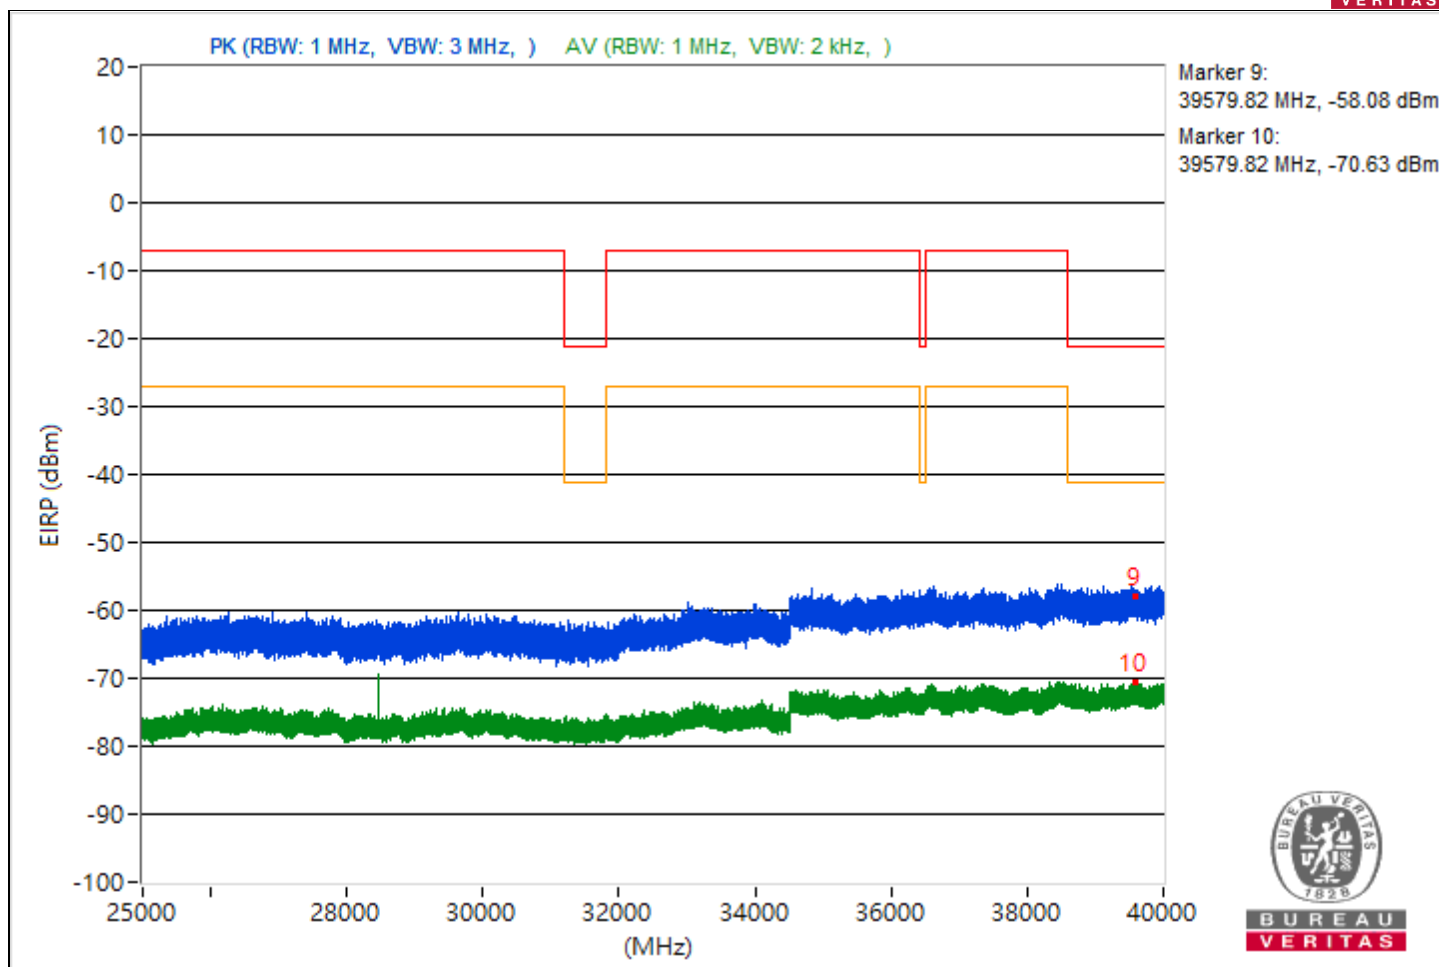



|                 |                             |                          |                 |
|-----------------|-----------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                 |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5457.29         | 37.52 PK                | 74             | -36.48      | -69.1                   | -69.14                  | 8.37                   | -57.74           |
| 2                            | 5457.29         | 29.25 AV                | 54             | -24.75      | -77.68                  | -77.13                  | 8.37                   | -66.01           |
| 3                            | #7940.03        | 44.38 PK                | 88.26          | -43.88      | -59.64                  | -69.92                  | 8.37                   | -50.88           |
| 4                            | #7940.03        | 42.87 AV                | 68.26          | -25.39      | -60.84                  | -78.13                  | 8.37                   | -52.39           |
| 5                            | 19181.8         | 39.35 PK                | 74             | -34.65      | -66.4                   | -68.41                  | 8.37                   | -55.91           |
| 6                            | 19181.8         | 28.61 AV                | 54             | -25.39      | -75.96                  | -82.12                  | 8.37                   | -66.65           |
| 7                            | 23986.4         | 41.53 PK                | 74             | -32.47      | -65.26                  | -64.96                  | 8.37                   | -53.73           |
| 8                            | 23986.4         | 29.92 AV                | 54             | -24.08      | -77.74                  | -75.9                   | 8.37                   | -65.34           |
| 9                            | 39999.82        | 38.12 PK                | 74             | -35.88      | -67.73                  | -69.48                  | 8.37                   | -57.14           |
| 10                           | 39999.82        | 25.31 AV                | 54             | -28.69      | -80.2                   | -82.87                  | 8.37                   | -69.95           |

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

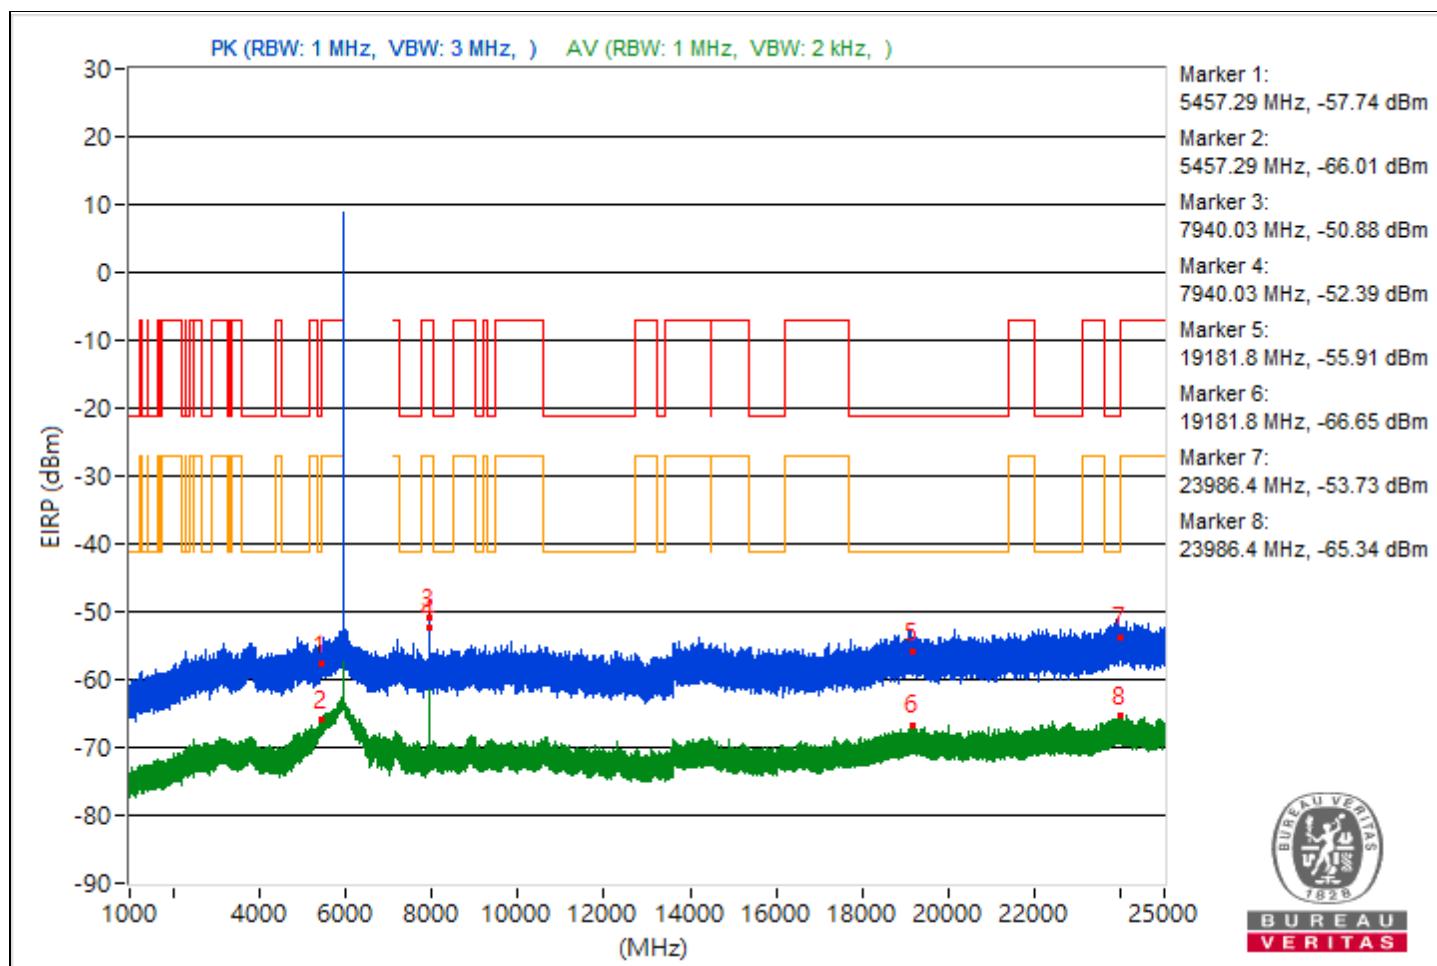


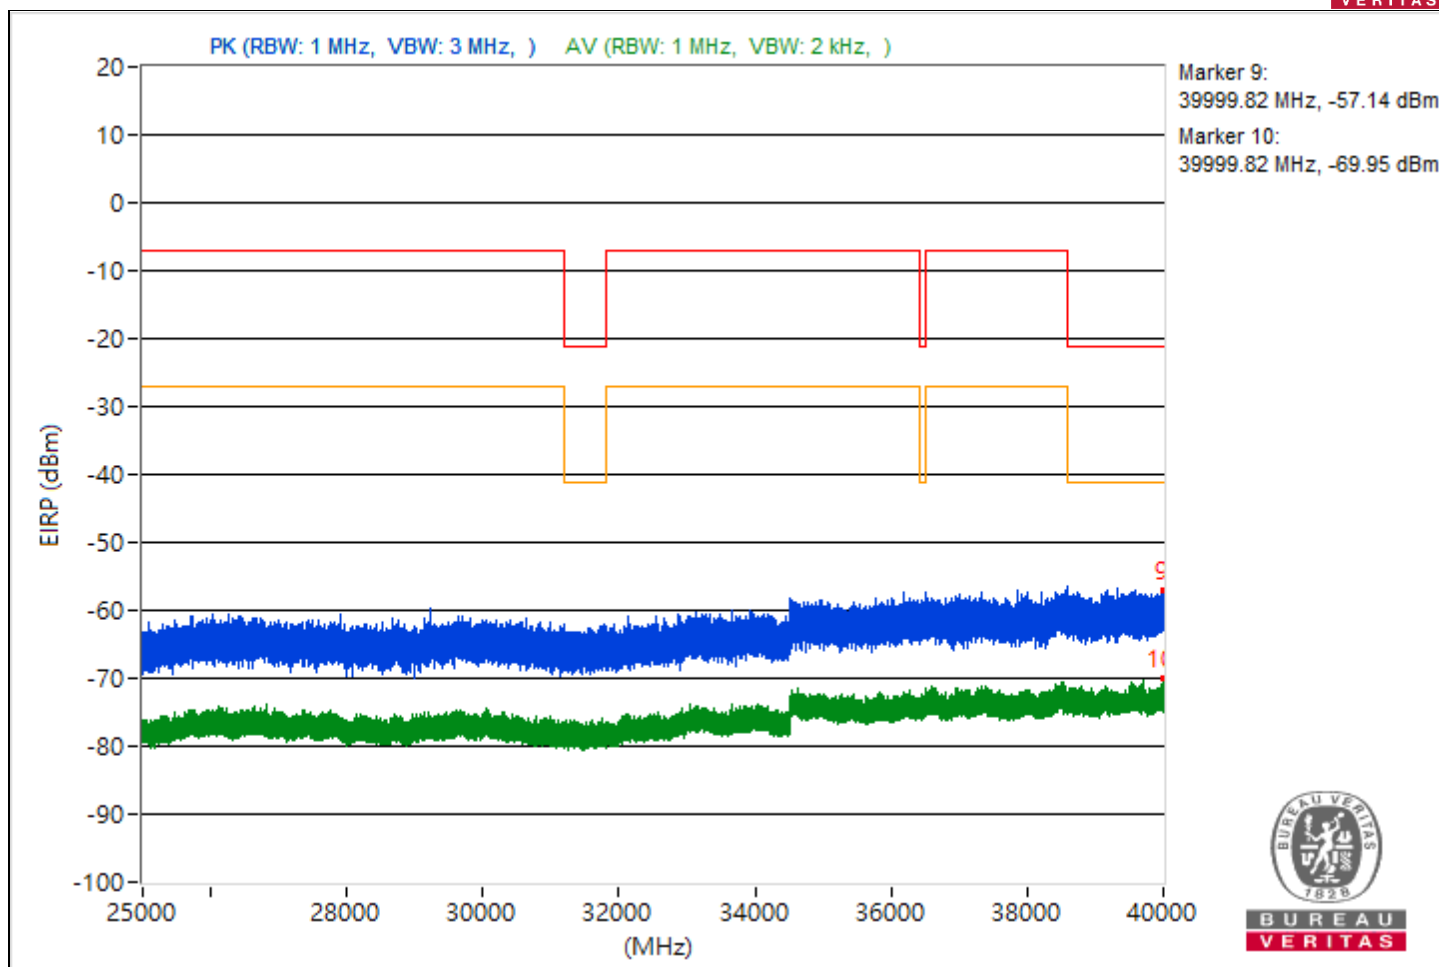


|                 |                             |                          |                  |
|-----------------|-----------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                 |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5437.46         | 38.43 PK                | 74             | -35.57      | -68.12                  | -68.32                  | 8.37                   | -56.83           |
| 2                            | 5437.46         | 27.41 AV                | 54             | -26.59      | -77.87                  | -81.22                  | 8.37                   | -67.85           |
| 3                            | 7260.88         | 37.5 PK                 | 74             | -36.5       | -70.2                   | -68.29                  | 8.37                   | -57.76           |
| 4                            | 7260.88         | 26.71 AV                | 54             | -27.29      | -78.65                  | -81.75                  | 8.37                   | -68.55           |
| 5                            | 20531.8         | 38.72 PK                | 74             | -35.28      | -69.3                   | -66.87                  | 8.37                   | -56.54           |
| 6                            | 20531.8         | 27.9 AV                 | 54             | -26.1       | -81.35                  | -77.12                  | 8.37                   | -67.36           |
| 7                            | 23938.5         | 41.73 PK                | 74             | -32.27      | -65.23                  | -64.6                   | 8.37                   | -53.53           |
| 8                            | 23938.5         | 29.56 AV                | 54             | -24.44      | -76.13                  | -78.29                  | 8.37                   | -65.7            |
| 9                            | 39585.51        | 36.86 PK                | 74             | -37.14      | -70.24                  | -69.37                  | 8.37                   | -58.4            |
| 10                           | 39585.51        | 24.48 AV                | 54             | -29.52      | -85.2                   | -80.39                  | 8.37                   | -70.78           |

Note: Margin value = Emission Level - Limit value

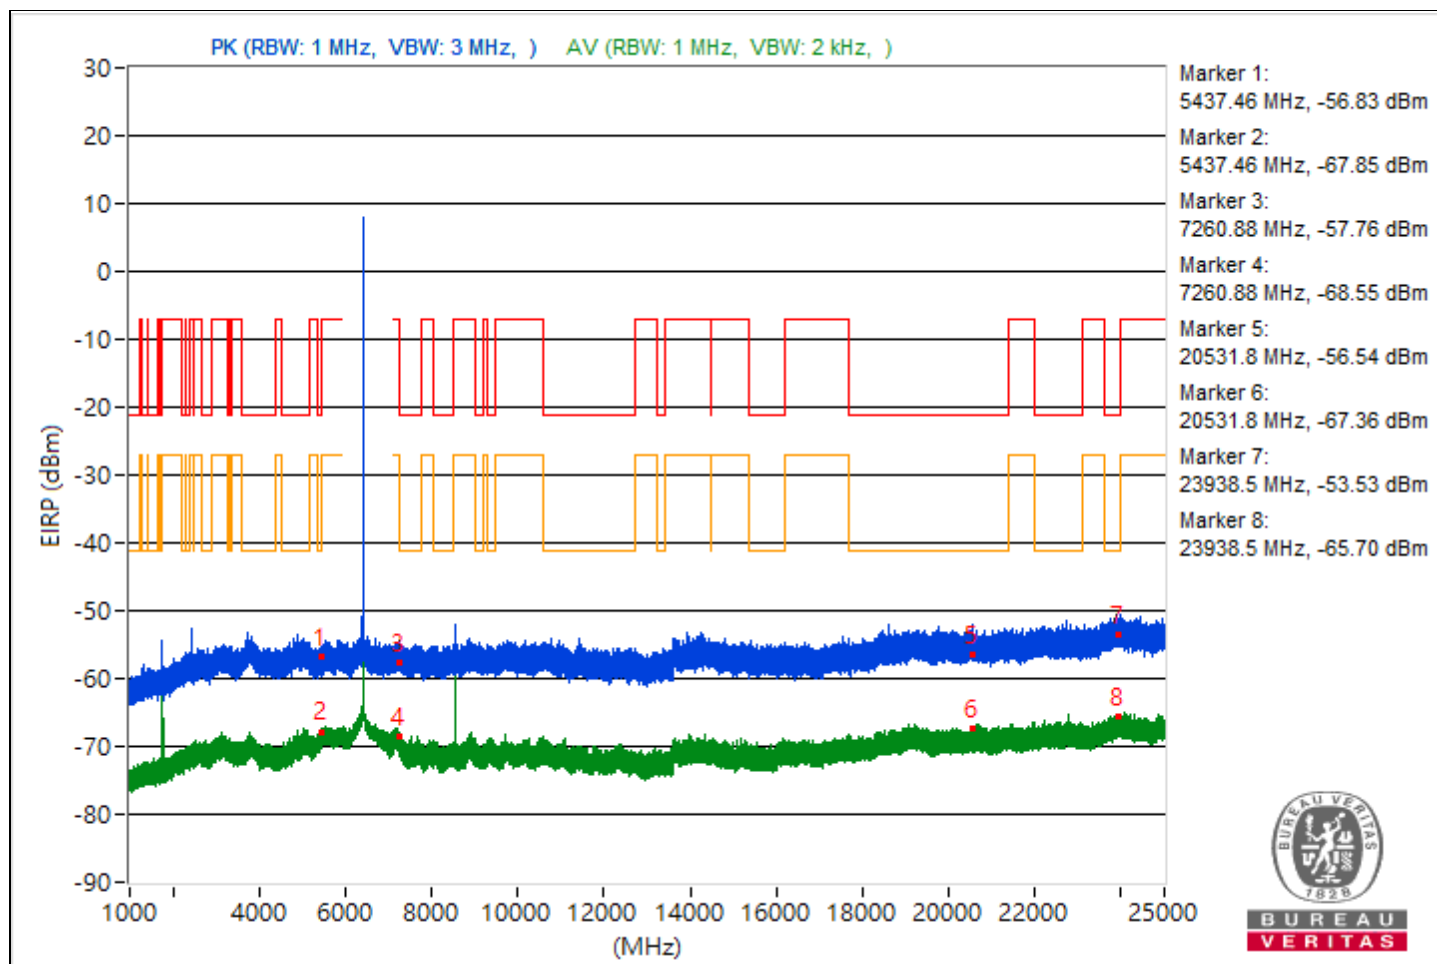


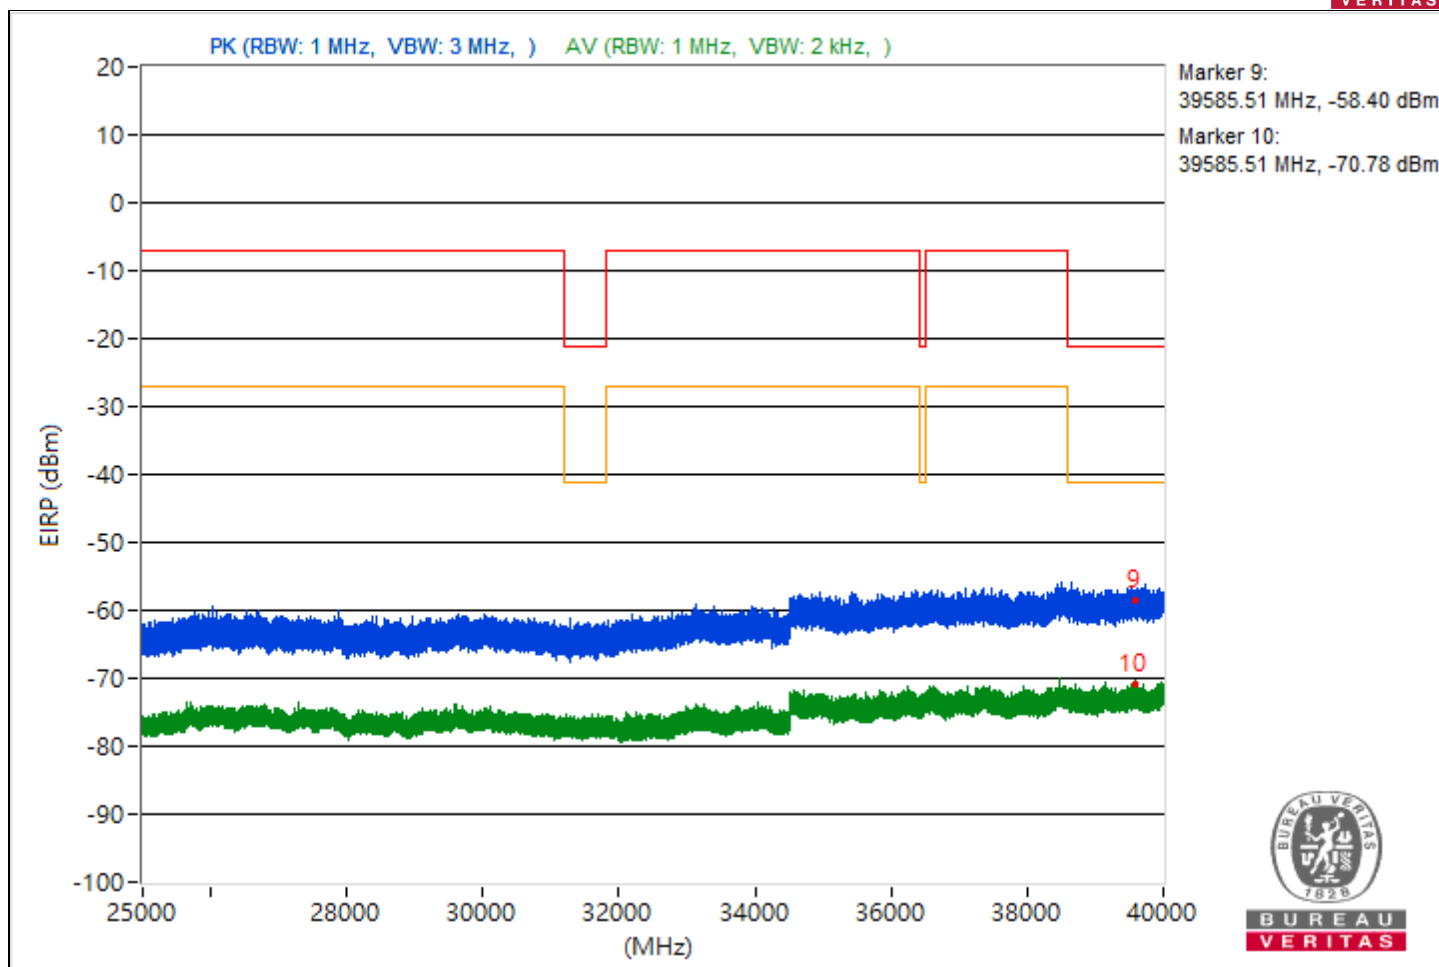


|                 |                             |                          |                  |
|-----------------|-----------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 97 : 6435 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                 |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5450.91         | 36.74 PK                | 74             | -37.26      | -69.75                  | -70.06                  | 8.37                   | -58.52           |
| 2                            | 5450.91         | 28.23 AV                | 54             | -25.77      | -79.35                  | -77.63                  | 8.37                   | -67.03           |
| 3                            | 7259.94         | 36.54 PK                | 74             | -37.46      | -69.9                   | -70.31                  | 8.37                   | -58.72           |
| 4                            | 7259.94         | 27.6 AV                 | 54             | -26.4       | -79.69                  | -78.47                  | 8.37                   | -67.66           |
| 5                            | 19224.9         | 39.45 PK                | 74             | -34.55      | -67.23                  | -67.15                  | 8.37                   | -55.81           |
| 6                            | 19224.9         | 28.76 AV                | 54             | -25.24      | -78.56                  | -77.29                  | 8.37                   | -66.5            |
| 7                            | 23984.4         | 40.48 PK                | 74             | -33.52      | -64.96                  | -67.84                  | 8.37                   | -54.78           |
| 8                            | 23984.4         | 30.09 AV                | 54             | -23.91      | -75.96                  | -77.24                  | 8.37                   | -65.17           |
| 9                            | 39641.07        | 36.23 PK                | 74             | -37.77      | -70.36                  | -70.46                  | 8.37                   | -59.03           |
| 10                           | 39641.07        | 24.06 AV                | 54             | -29.94      | -80.99                  | -85.09                  | 8.37                   | -71.2            |

Note: Margin value = Emission Level - Limit value

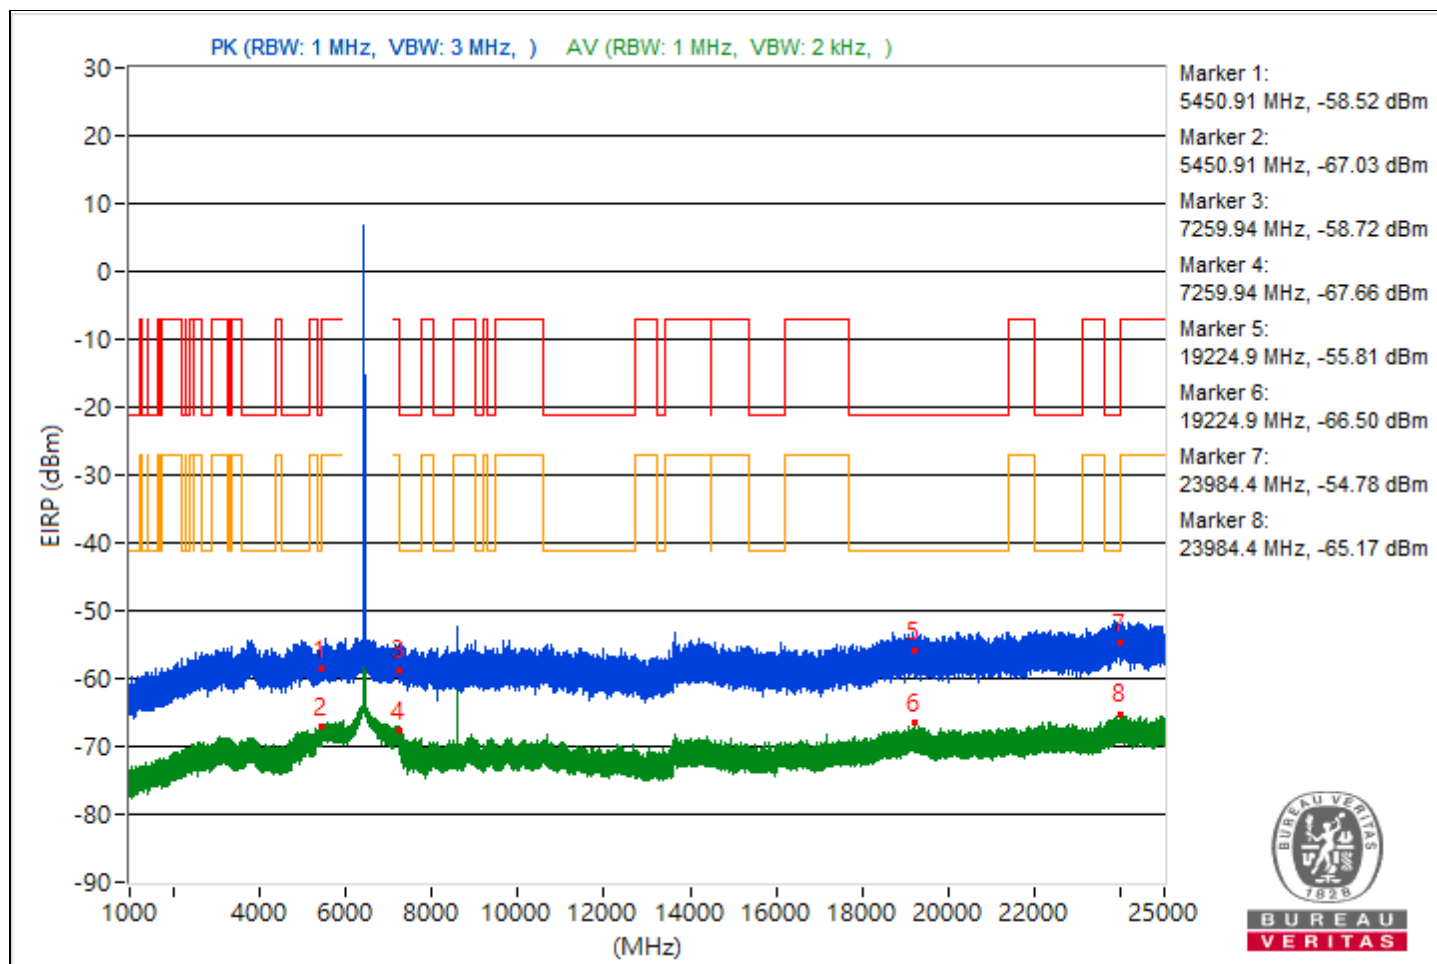


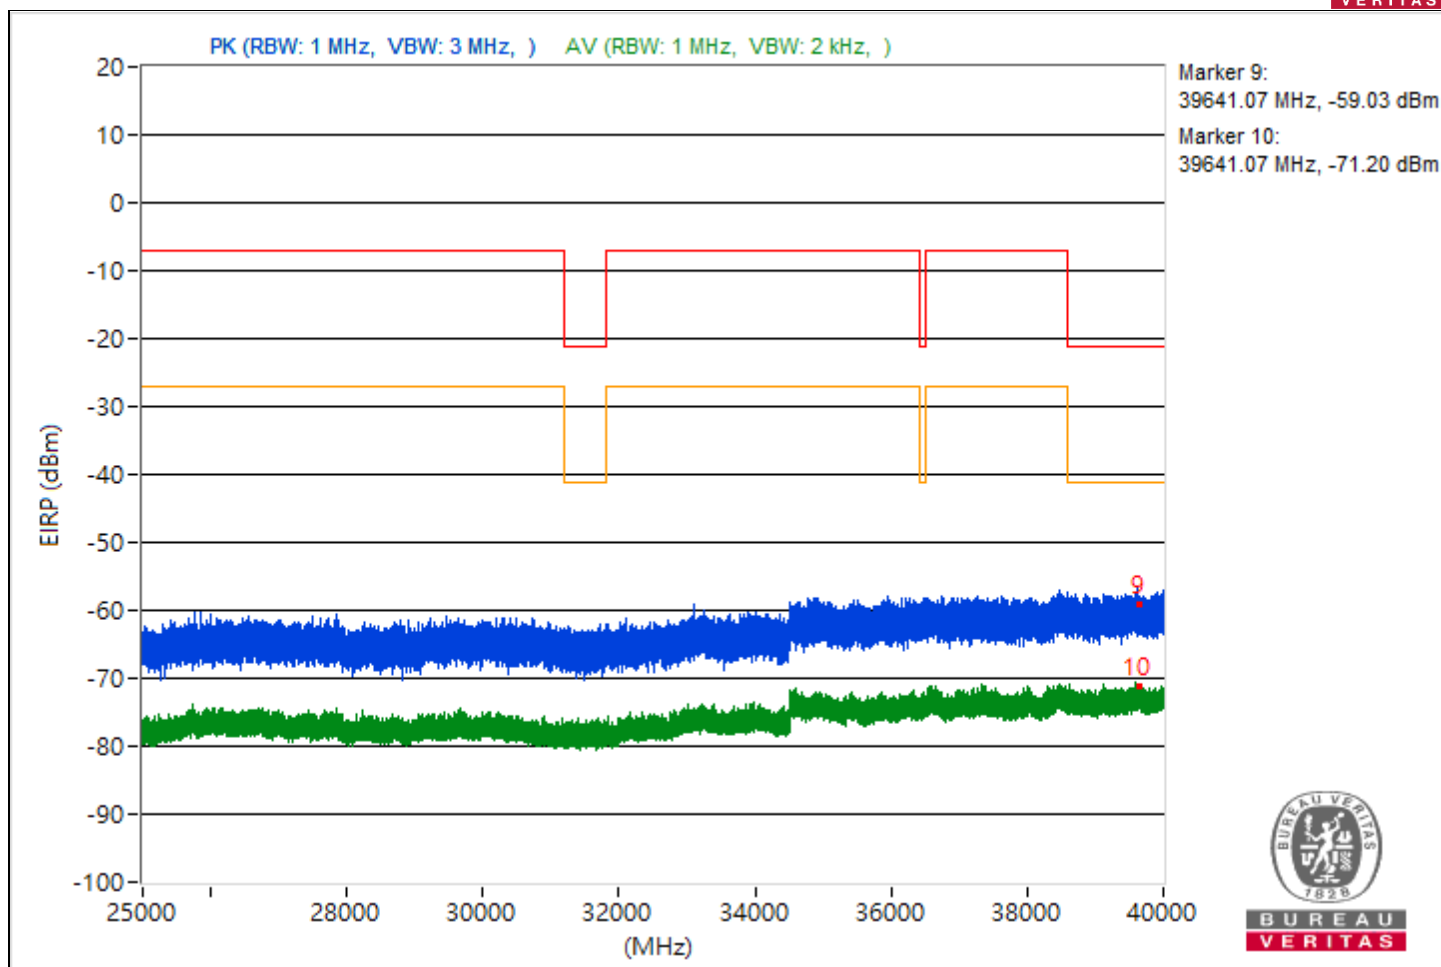


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 113 : 6515 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5451.61         | 38.01 PK                | 74             | -35.99      | -70.44                  | -67.36                  | 8.37                   | -57.25           |
| 2                            | 5451.61         | 28.1 AV                 | 54             | -25.9       | -77.34                  | -80.2                   | 8.37                   | -67.16           |
| 3                            | 7260.02         | 39.49 PK                | 74             | -34.51      | -68.79                  | -65.96                  | 8.37                   | -55.77           |
| 4                            | 7260.02         | 27.66 AV                | 54             | -26.34      | -77.75                  | -80.72                  | 8.37                   | -67.6            |
| 5                            | 19015.9         | 38.8 PK                 | 74             | -35.2       | -68.77                  | -67.08                  | 8.37                   | -56.46           |
| 6                            | 19015.9         | 28.38 AV                | 54             | -25.62      | -77.25                  | -79.59                  | 8.37                   | -66.88           |
| 7                            | 24000           | 41.45 PK                | 74             | -32.55      | -66.46                  | -64.2                   | 8.37                   | -53.81           |
| 8                            | 24000           | 29.43 AV                | 54             | -24.57      | -79.7                   | -75.64                  | 8.37                   | -65.83           |
| 9                            | 39635.47        | 36.19 PK                | 74             | -37.81      | -71.94                  | -69.34                  | 8.37                   | -59.07           |
| 10                           | 39635.47        | 24.45 AV                | 54             | -29.55      | -85.03                  | -80.48                  | 8.37                   | -70.81           |

Note: Margin value = Emission Level - Limit value

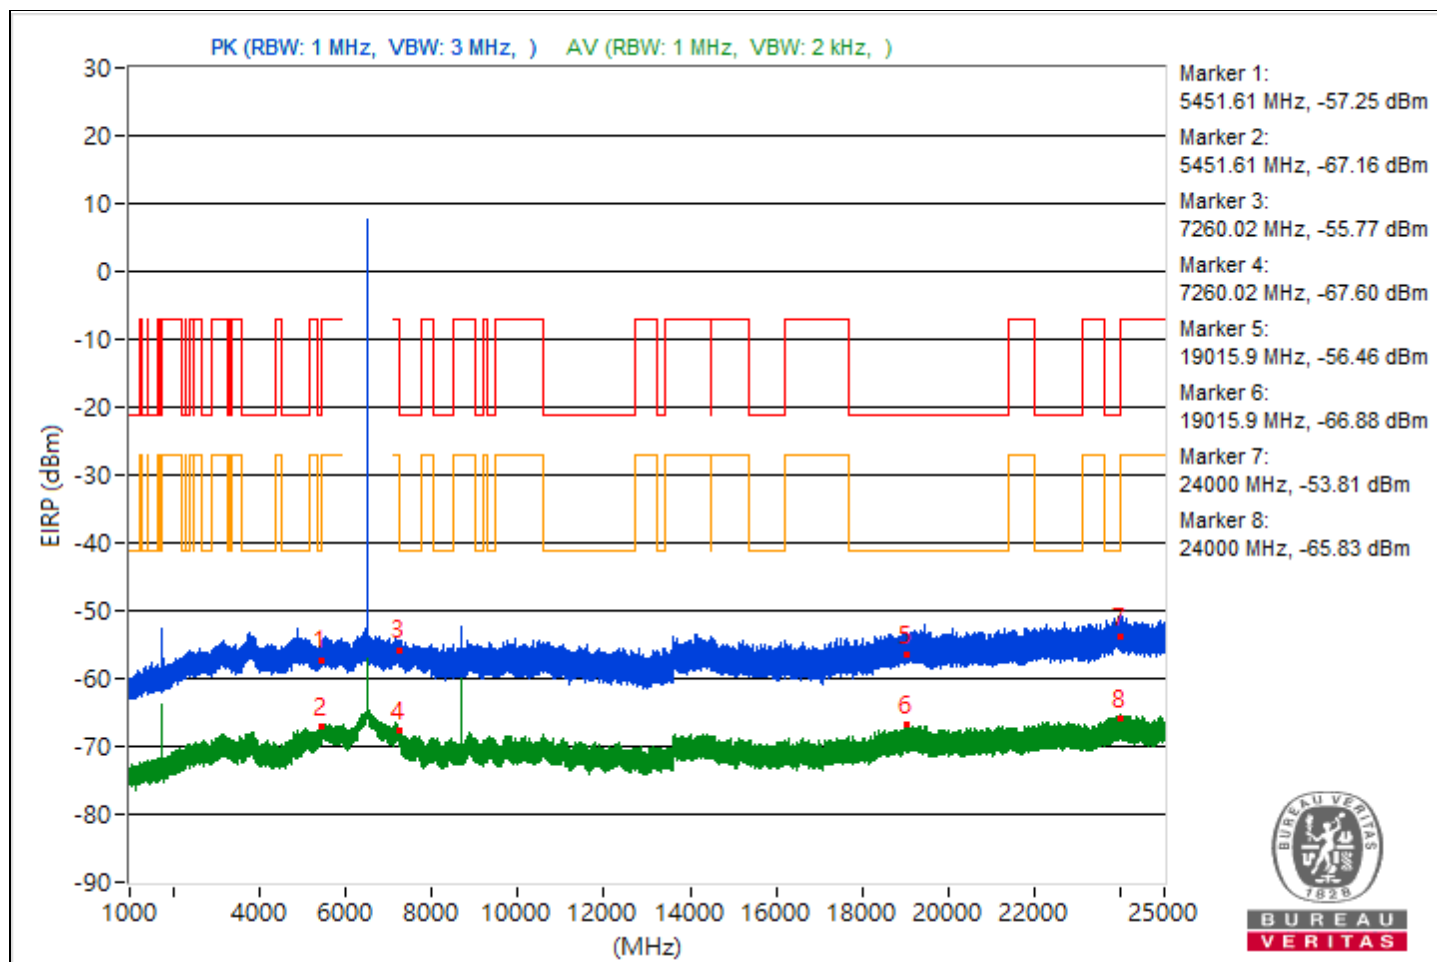


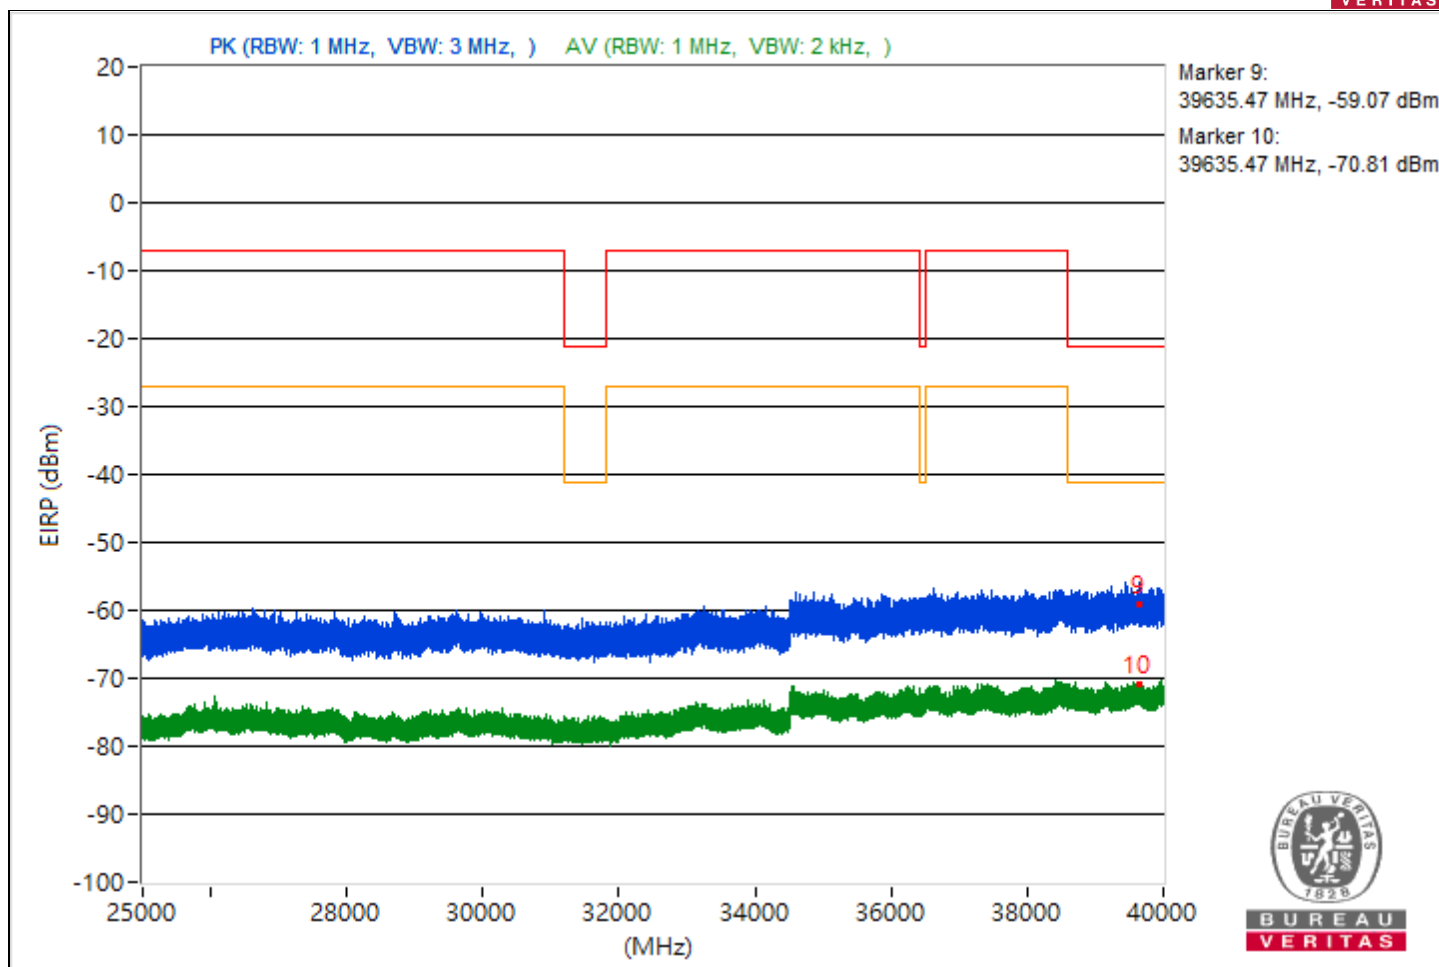


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5455.34         | 37.86 PK                | 74             | -36.14      | -68.69                  | -68.87                  | 8.37                   | -57.4            |
| 2                            | 5455.34         | 28.59 AV                | 54             | -25.41      | -77.44                  | -78.77                  | 8.37                   | -66.67           |
| 3                            | 7257.84         | 36.78 PK                | 74             | -37.22      | -70.35                  | -69.42                  | 8.37                   | -58.48           |
| 4                            | 7257.84         | 28.09 AV                | 54             | -25.91      | -79.33                  | -77.89                  | 8.37                   | -67.17           |
| 5                            | 20687.3         | 38.9 PK                 | 74             | -35.1       | -68.11                  | -67.4                   | 8.37                   | -56.36           |
| 6                            | 20687.3         | 27.64 AV                | 54             | -26.36      | -82.47                  | -77.1                   | 8.37                   | -67.62           |
| 7                            | 23951           | 39.76 PK                | 74             | -34.24      | -68.12                  | -65.92                  | 8.37                   | -55.5            |
| 8                            | 23951           | 29.41 AV                | 54             | -24.59      | -78.93                  | -76.01                  | 8.37                   | -65.85           |
| 9                            | 39699.73        | 34.5 PK                 | 74             | -39.5       | -70.37                  | -75.15                  | 8.37                   | -60.76           |
| 10                           | 39699.73        | 24.33 AV                | 54             | -29.67      | -81.11                  | -83.97                  | 8.37                   | -70.93           |

Note: Margin value = Emission Level - Limit value

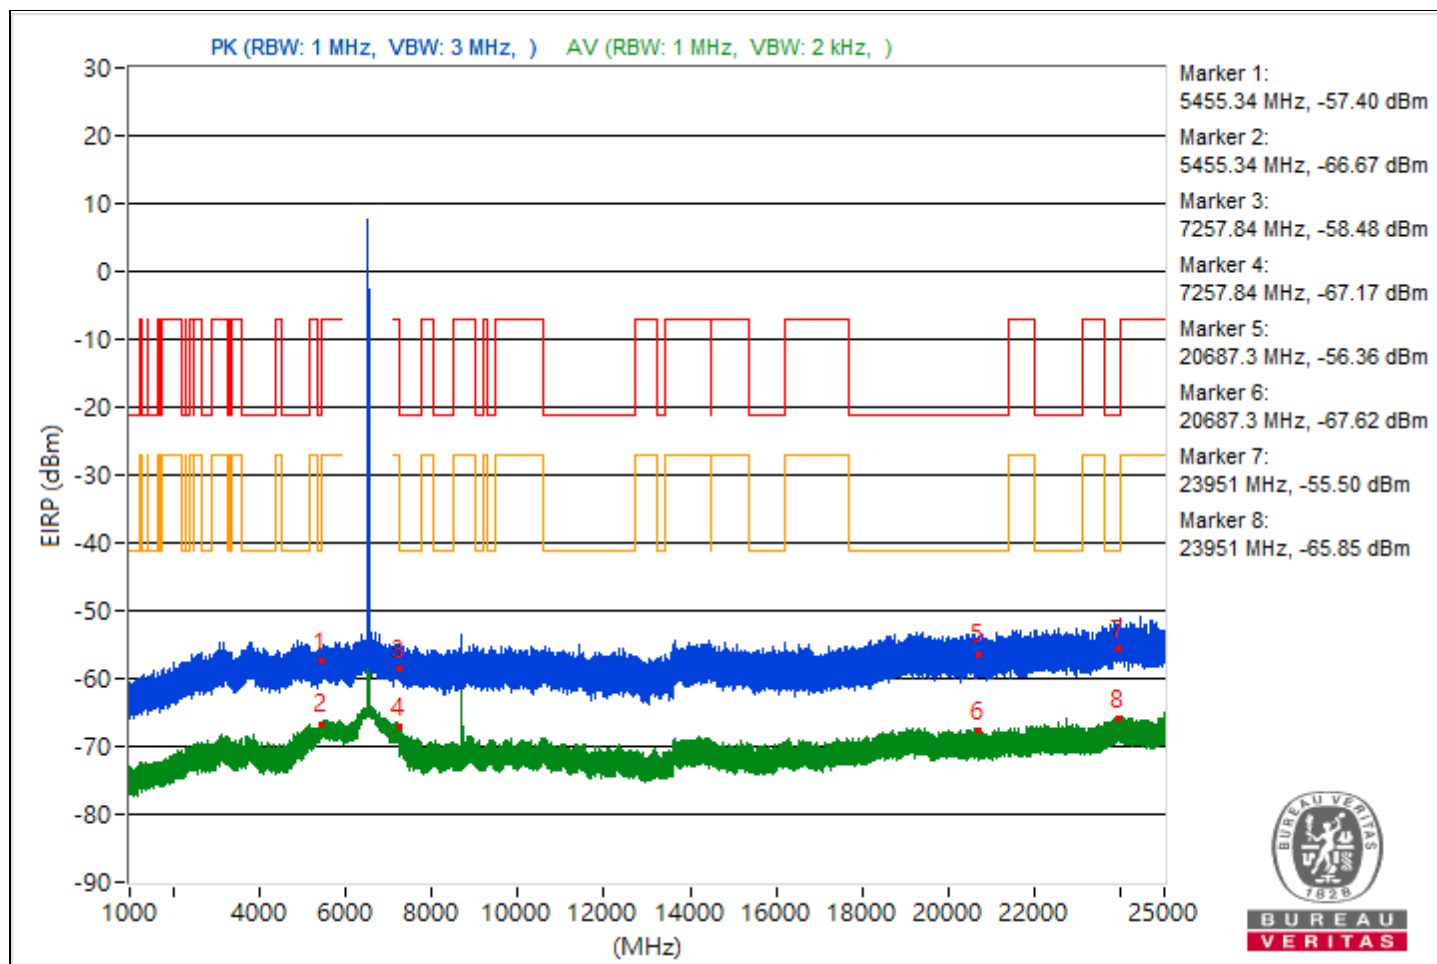


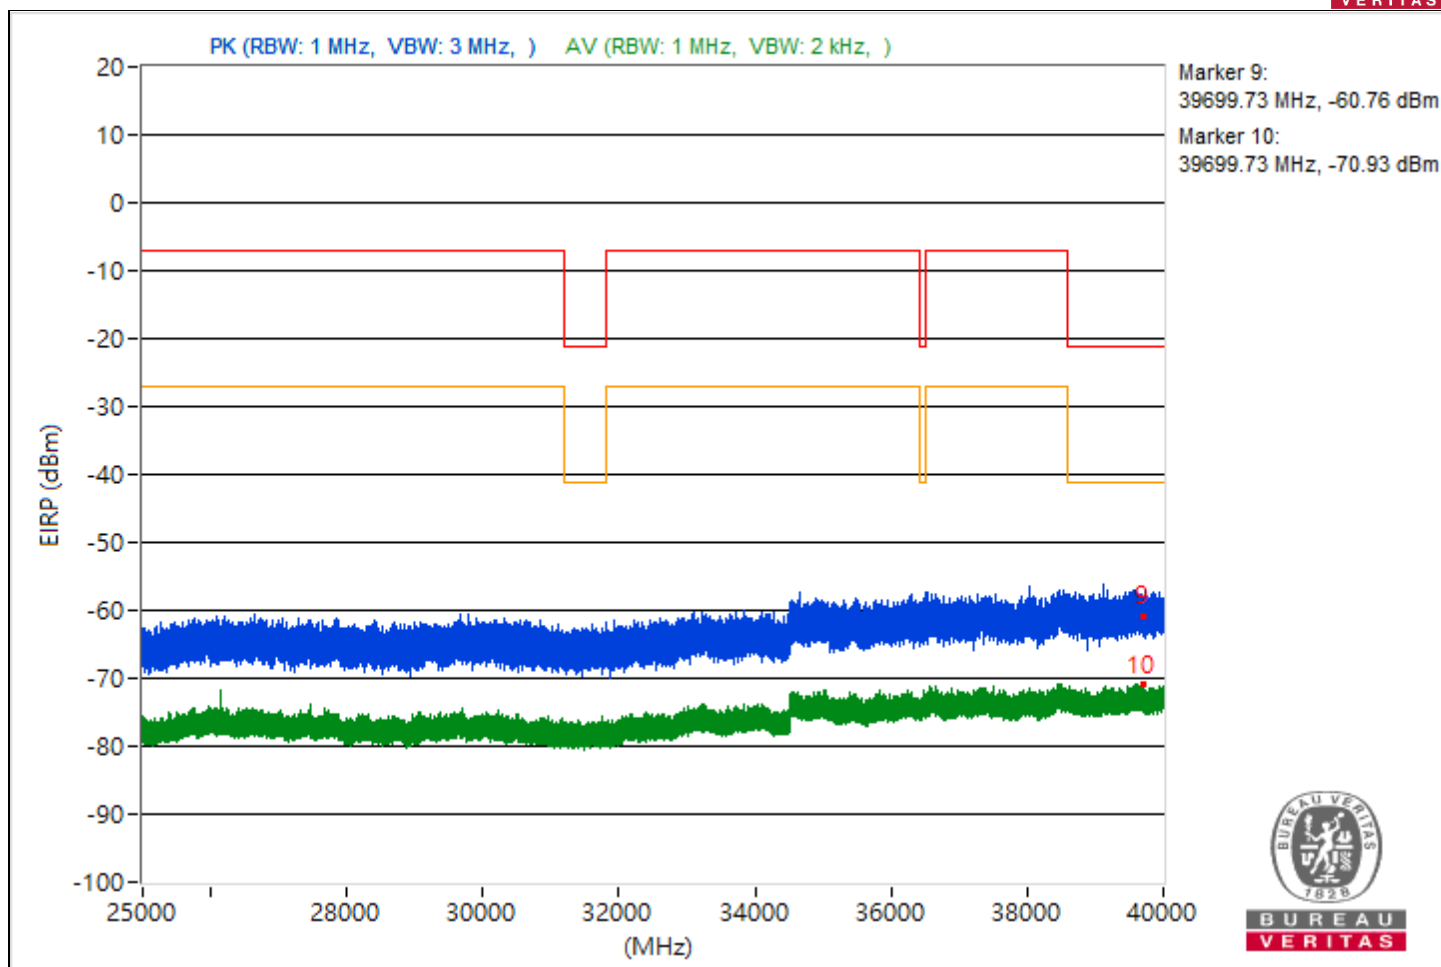


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5455.97         | 37.62 PK                | 74             | -36.38      | -70.02                  | -68.21                  | 8.37                   | -57.64           |
| 2                            | 5455.97         | 27.62 AV                | 54             | -26.38      | -77.6                   | -81.15                  | 8.37                   | -67.64           |
| 3                            | 9166.49         | 42.32 PK                | 74             | -31.68      | -62.33                  | -68.11                  | 8.37                   | -52.94           |
| 4                            | 9166.49         | 34.54 AV                | 54             | -19.46      | -69.57                  | -78.95                  | 8.37                   | -60.72           |
| 5                            | 19076.5         | 40.9 PK                 | 74             | -33.1       | -66.77                  | -64.9                   | 8.37                   | -54.36           |
| 6                            | 19076.5         | 27.96 AV                | 54             | -26.04      | -77.28                  | -80.77                  | 8.37                   | -67.3            |
| 7                            | 23777.5         | 40.57 PK                | 74             | -33.43      | -67.42                  | -65.04                  | 8.37                   | -54.69           |
| 8                            | 23777.5         | 29.73 AV                | 54             | -24.27      | -75.58                  | -78.82                  | 8.37                   | -65.53           |
| 9                            | 39996.98        | 37.43 PK                | 74             | -36.57      | -71.23                  | -67.84                  | 8.37                   | -57.83           |
| 10                           | 39996.98        | 24.56 AV                | 54             | -29.44      | -80.87                  | -83.76                  | 8.37                   | -70.7            |

Note: Margin value = Emission Level - Limit value

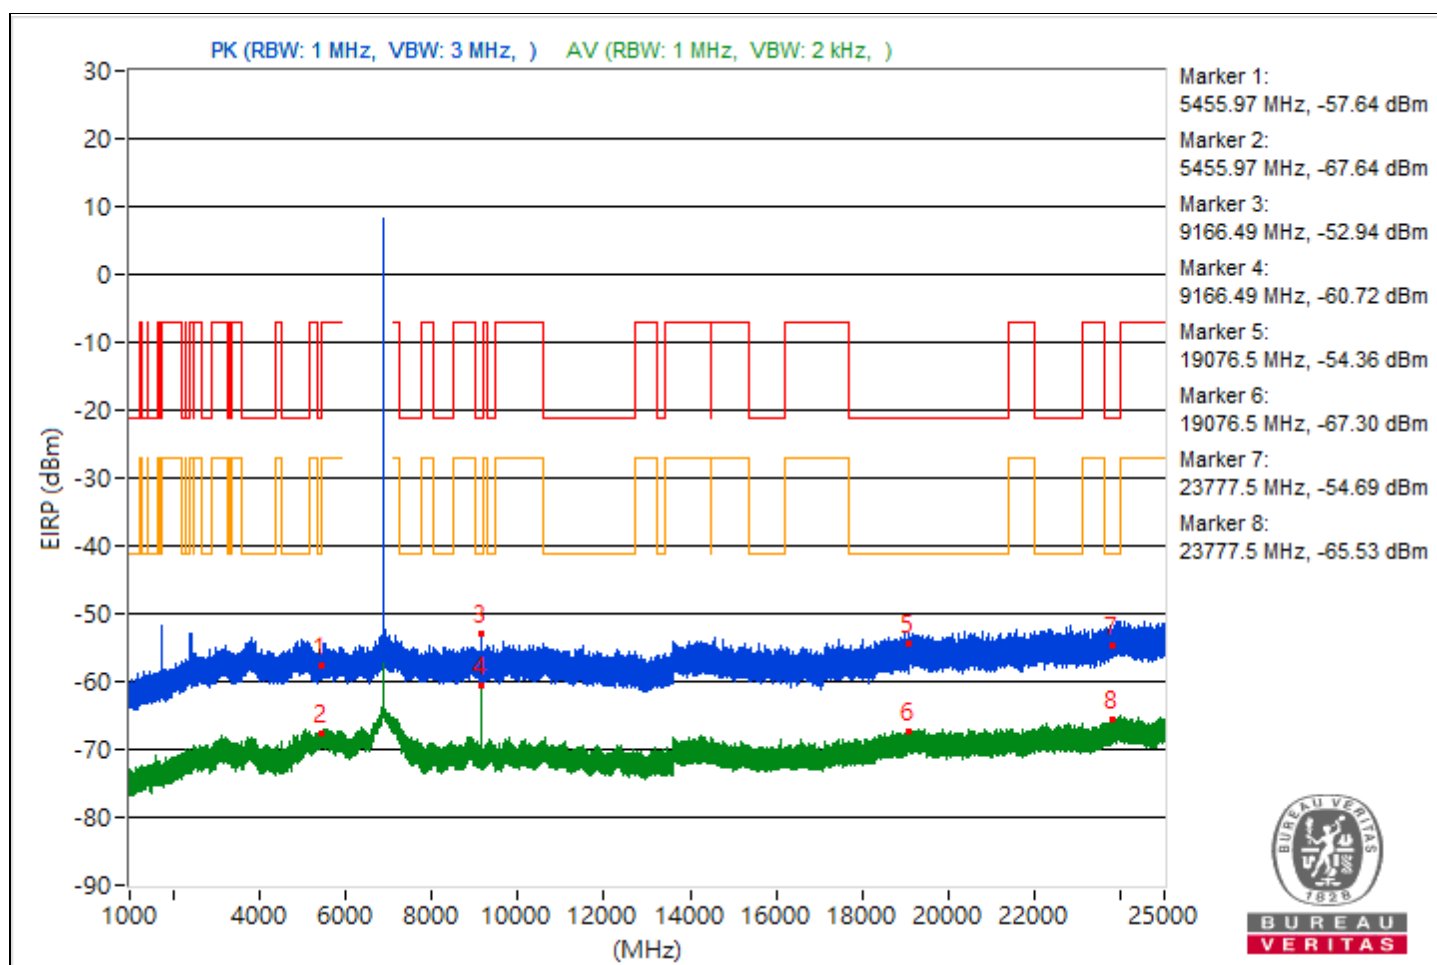


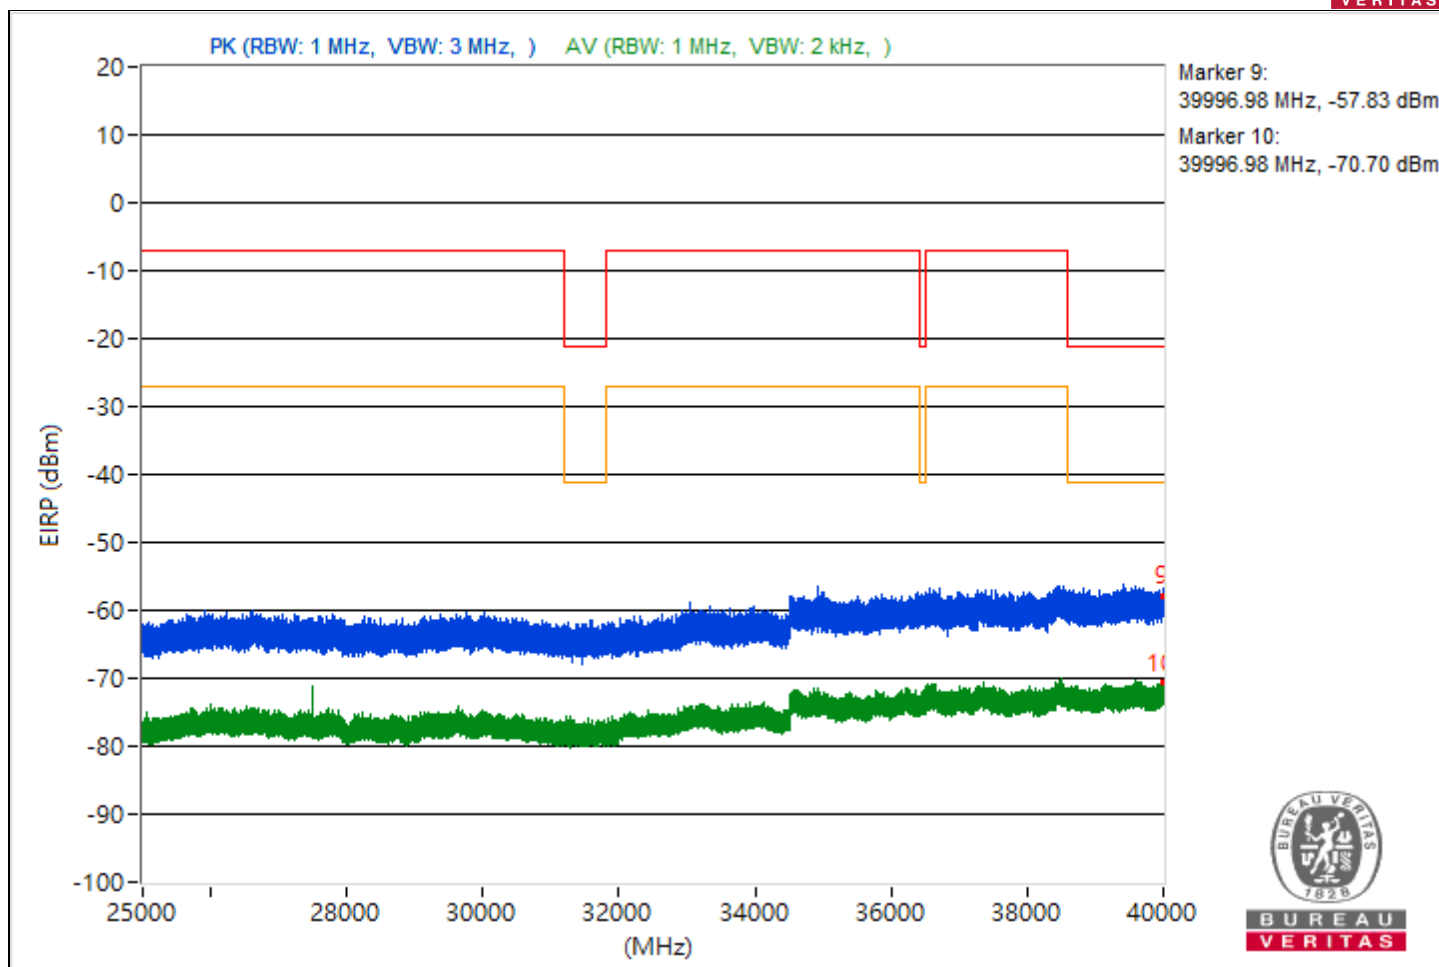


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5449.51         | 36.33 PK                | 74             | -37.67      | -69.34                  | -71.55                  | 8.37                   | -58.93           |
| 2                            | 5449.51         | 28.47 AV                | 54             | -25.53      | -77.48                  | -78.99                  | 8.37                   | -66.79           |
| 3                            | 9326.84         | 37.67 PK                | 74             | -36.33      | -67.85                  | -70.5                   | 8.37                   | -57.59           |
| 4                            | 9326.84         | 33.27 AV                | 54             | -20.73      | -71                     | -78.96                  | 8.37                   | -61.99           |
| 5                            | 21148.4         | 38.2 PK                 | 74             | -35.8       | -67.43                  | -69.77                  | 8.37                   | -57.06           |
| 6                            | 21148.4         | 28.13 AV                | 54             | -25.87      | -80.87                  | -77                     | 8.37                   | -67.13           |
| 7                            | 24000           | 41.06 PK                | 74             | -32.94      | -65.47                  | -65.7                   | 8.37                   | -54.2            |
| 8                            | 24000           | 30.11 AV                | 54             | -23.89      | -77.4                   | -75.81                  | 8.37                   | -65.15           |
| 9                            | 39559.11        | 36.16 PK                | 74             | -37.84      | -70.81                  | -70.17                  | 8.37                   | -59.1            |
| 10                           | 39559.11        | 24.41 AV                | 54             | -29.59      | -84.06                  | -80.95                  | 8.37                   | -70.85           |

Note: Margin value = Emission Level - Limit value

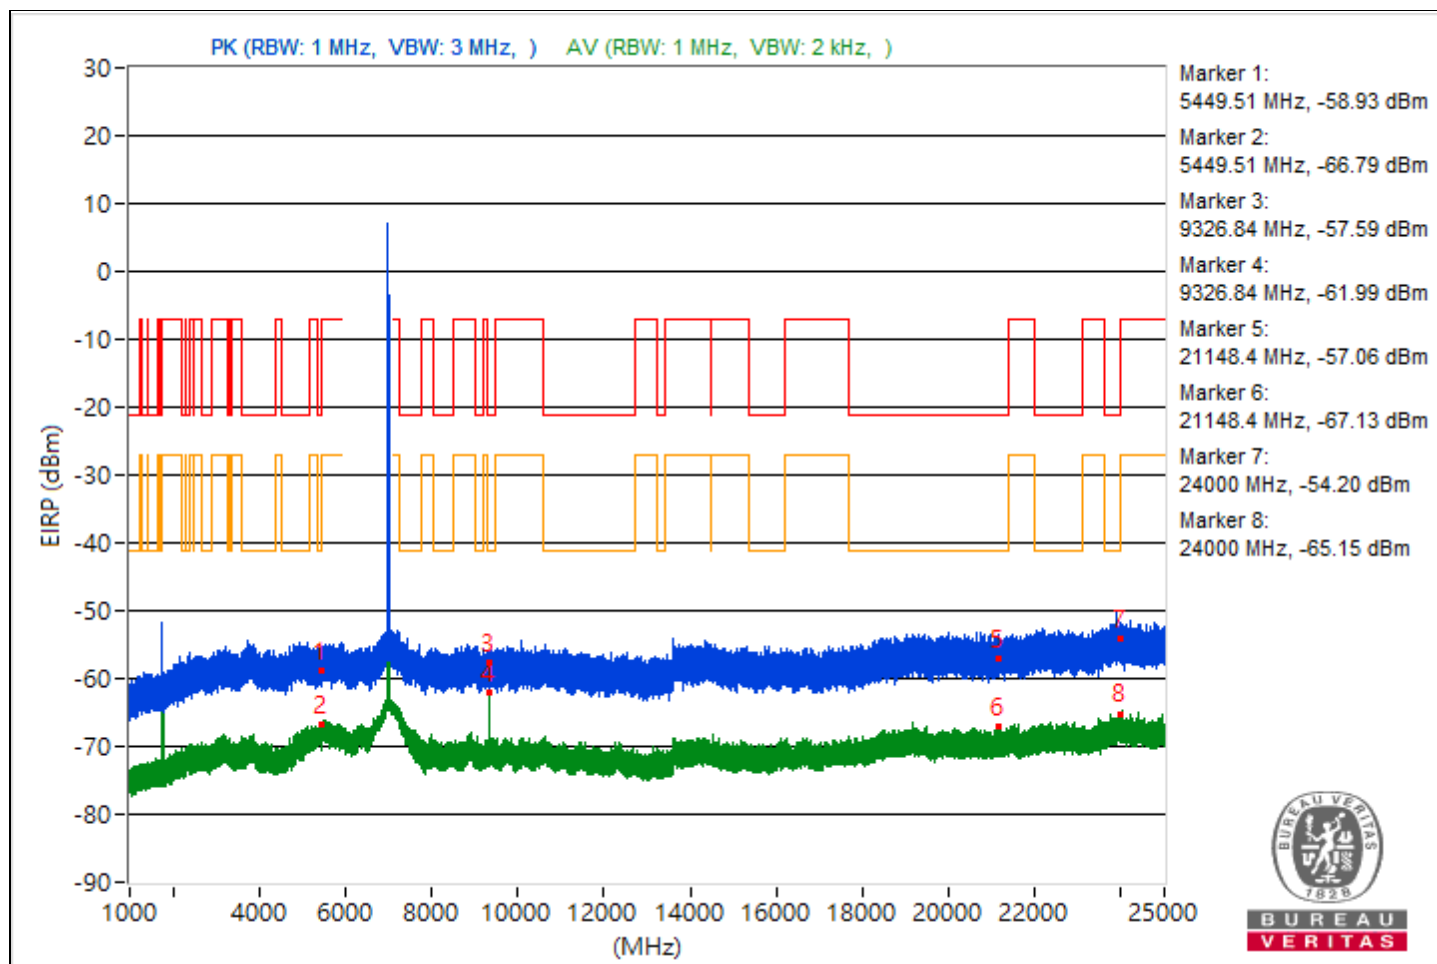


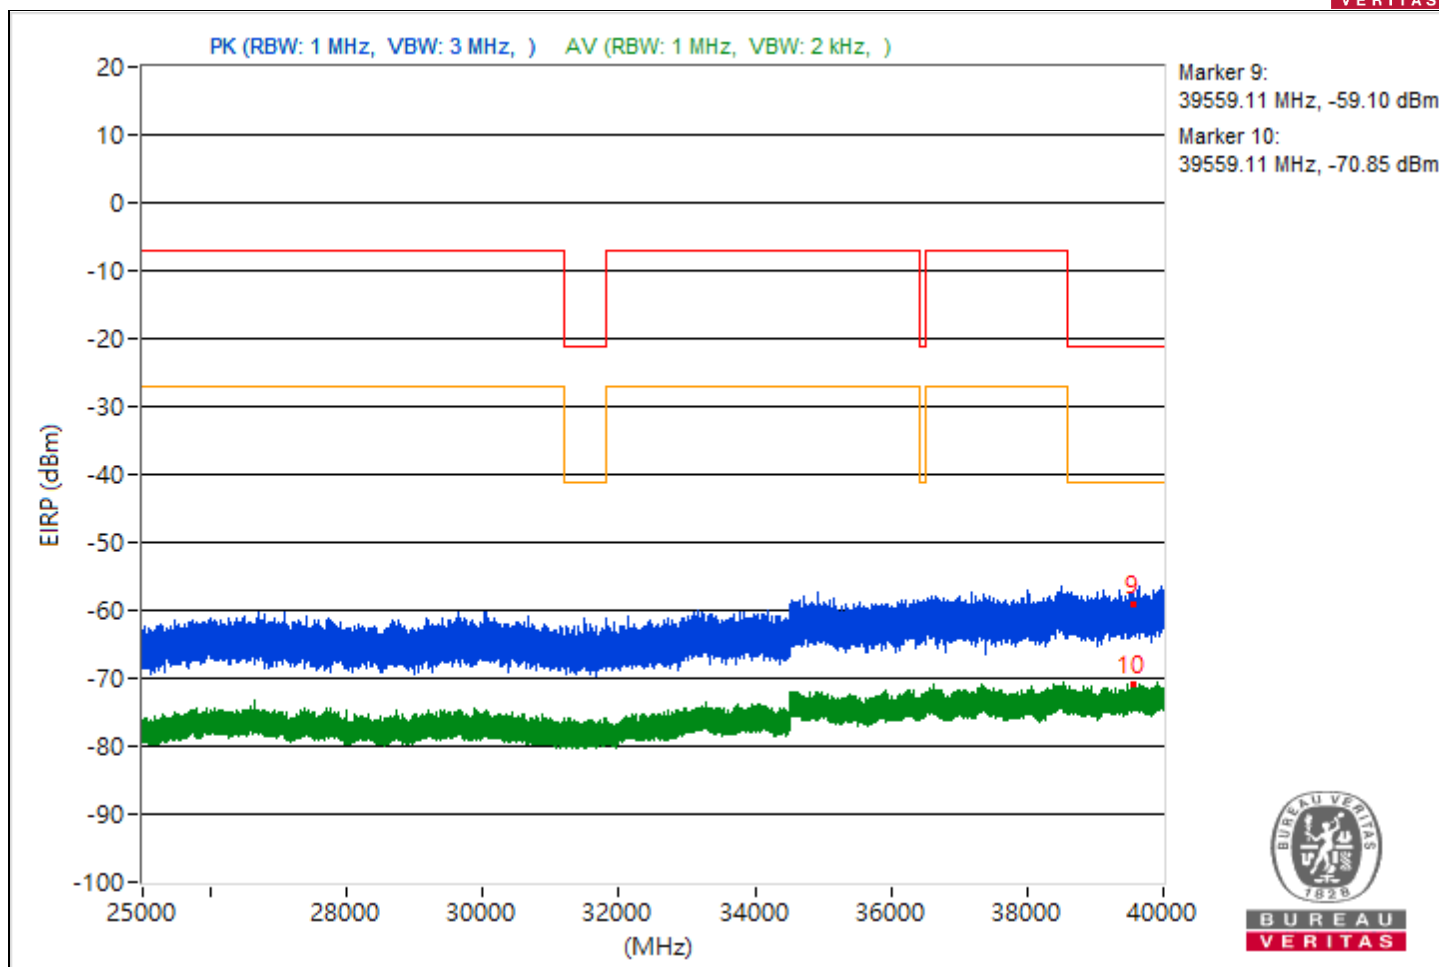


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5417.78         | 36.89 PK                | 74             | -37.11      | -70.46                  | -69.15                  | 8.37                   | -58.37           |
| 2                            | 5417.78         | 28.96 AV                | 54             | -25.04      | -78.25                  | -77.18                  | 8.37                   | -66.3            |
| 3                            | 7253.64         | 40.59 PK                | 74             | -33.41      | -65.92                  | -66.19                  | 8.37                   | -54.67           |
| 4                            | 7253.64         | 32.72 AV                | 54             | -21.28      | -73.59                  | -74.28                  | 8.37                   | -62.54           |
| 5                            | 21137.1         | 36.43 PK                | 74             | -37.57      | -69.74                  | -70.73                  | 8.37                   | -58.83           |
| 6                            | 21137.1         | 27.81 AV                | 54             | -26.19      | -77.08                  | -81.8                   | 8.37                   | -67.45           |
| 7                            | 23923.6         | 41.56 PK                | 74             | -32.44      | -66.37                  | -64.08                  | 8.37                   | -53.7            |
| 8                            | 23923.6         | 29.43 AV                | 54             | -24.57      | -75.65                  | -79.68                  | 8.37                   | -65.83           |
| 9                            | 39434.84        | 34.98 PK                | 74             | -39.02      | -72                     | -71.34                  | 8.37                   | -60.28           |
| 10                           | 39434.84        | 24.38 AV                | 54             | -29.62      | -82.47                  | -82.06                  | 8.37                   | -70.88           |

Note: Margin value = Emission Level - Limit value

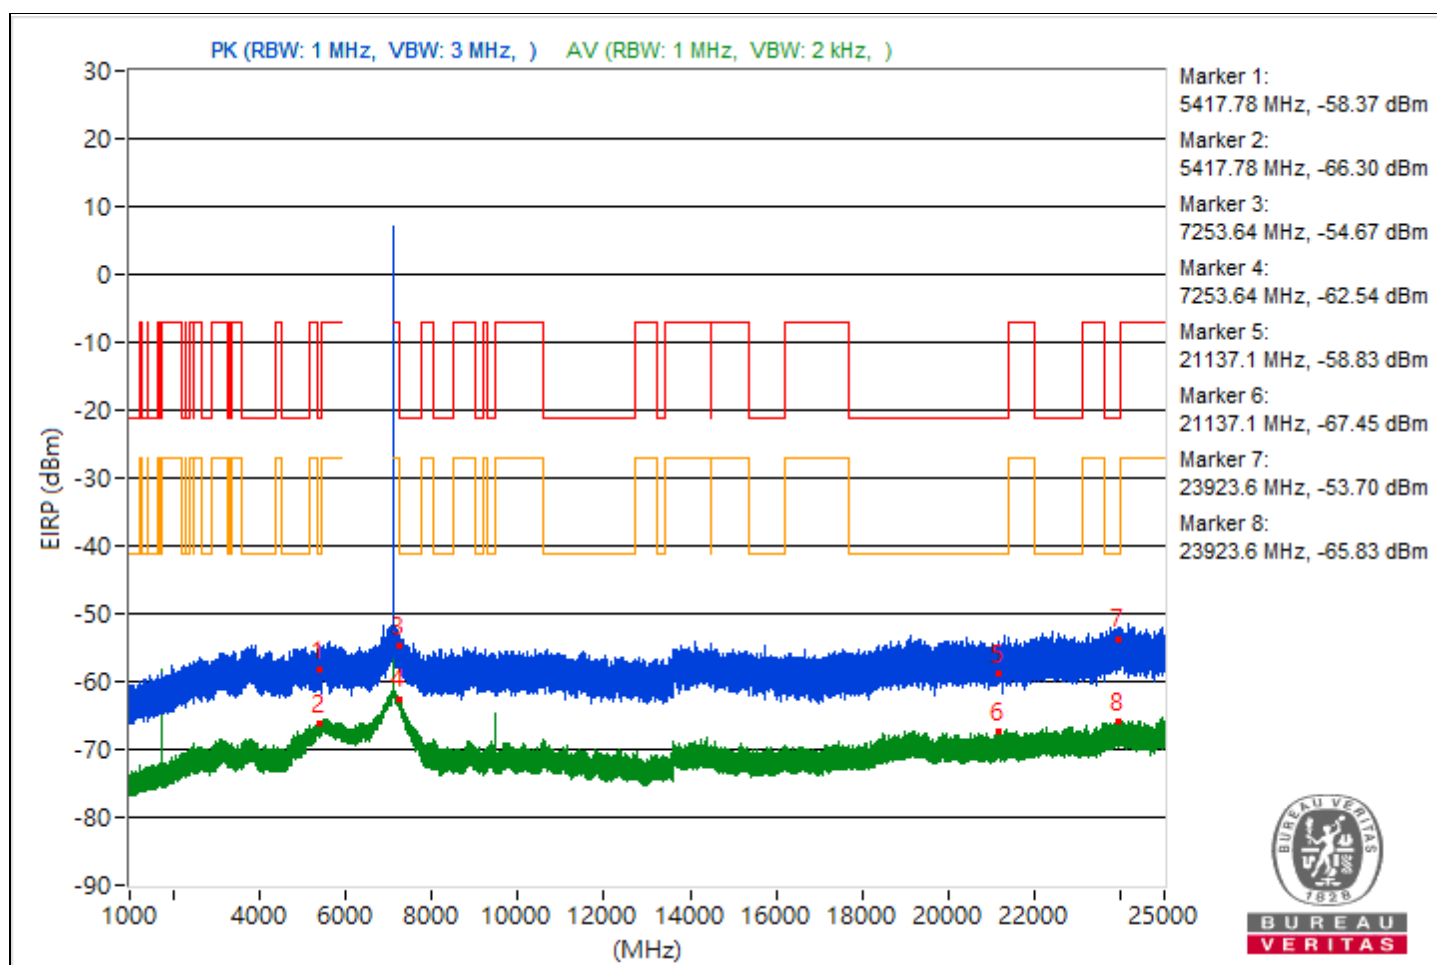

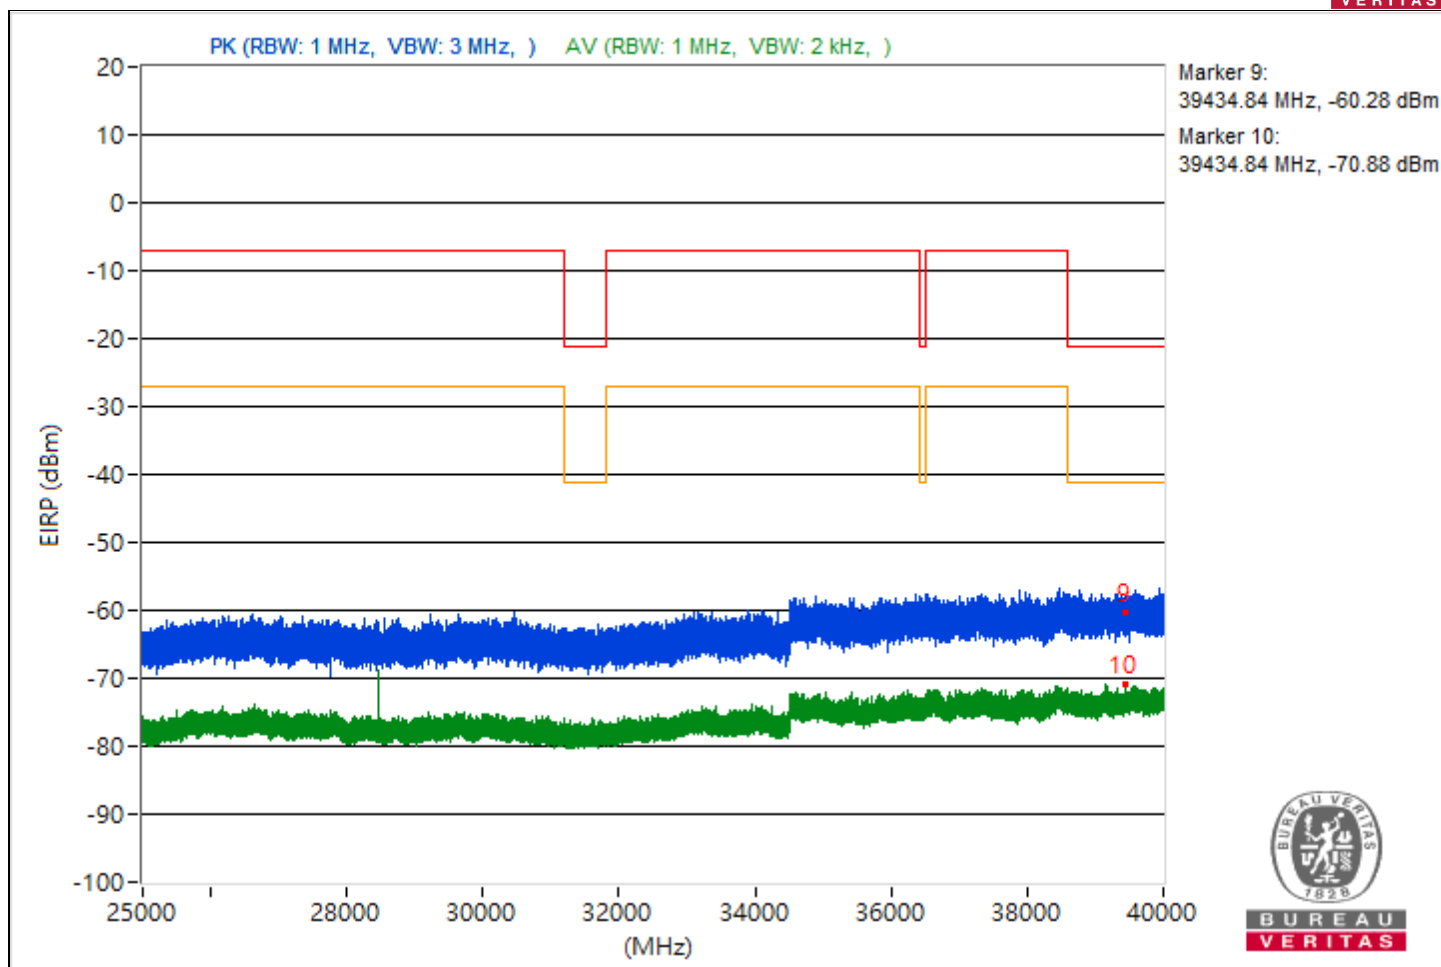



|                 |                              |                          |                 |
|-----------------|------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                  |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5458.77         | 36.76 PK                | 74             | -37.24      | -69.22                  | -70.66                  | 8.37                   | -58.5            |
| 2                            | 5458.77         | 28.98 AV                | 54             | -25.02      | -76.95                  | -78.51                  | 8.37                   | -66.28           |
| 3                            | #7940.03        | 44.74 PK                | 88.26          | -43.52      | -59.58                  | -67.23                  | 8.37                   | -50.52           |
| 4                            | #7940.03        | 42.53 AV                | 68.26          | -25.73      | -61.21                  | -77.08                  | 8.37                   | -52.73           |
| 5                            | 19141.9         | 39.19 PK                | 74             | -34.81      | -67.97                  | -66.98                  | 8.37                   | -56.07           |
| 6                            | 19141.9         | 27.75 AV                | 54             | -26.25      | -81.12                  | -77.43                  | 8.37                   | -67.51           |
| 7                            | 23903.2         | 38.44 PK                | 74             | -35.56      | -71.09                  | -66.48                  | 8.37                   | -56.82           |
| 8                            | 23903.2         | 29.27 AV                | 54             | -24.73      | -75.61                  | -80.37                  | 8.37                   | -65.99           |
| 9                            | 39699.82        | 34.97 PK                | 74             | -39.03      | -71.1                   | -72.34                  | 8.37                   | -60.29           |
| 10                           | 39699.82        | 24.29 AV                | 54             | -29.71      | -80.55                  | -85.48                  | 8.37                   | -70.97           |

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

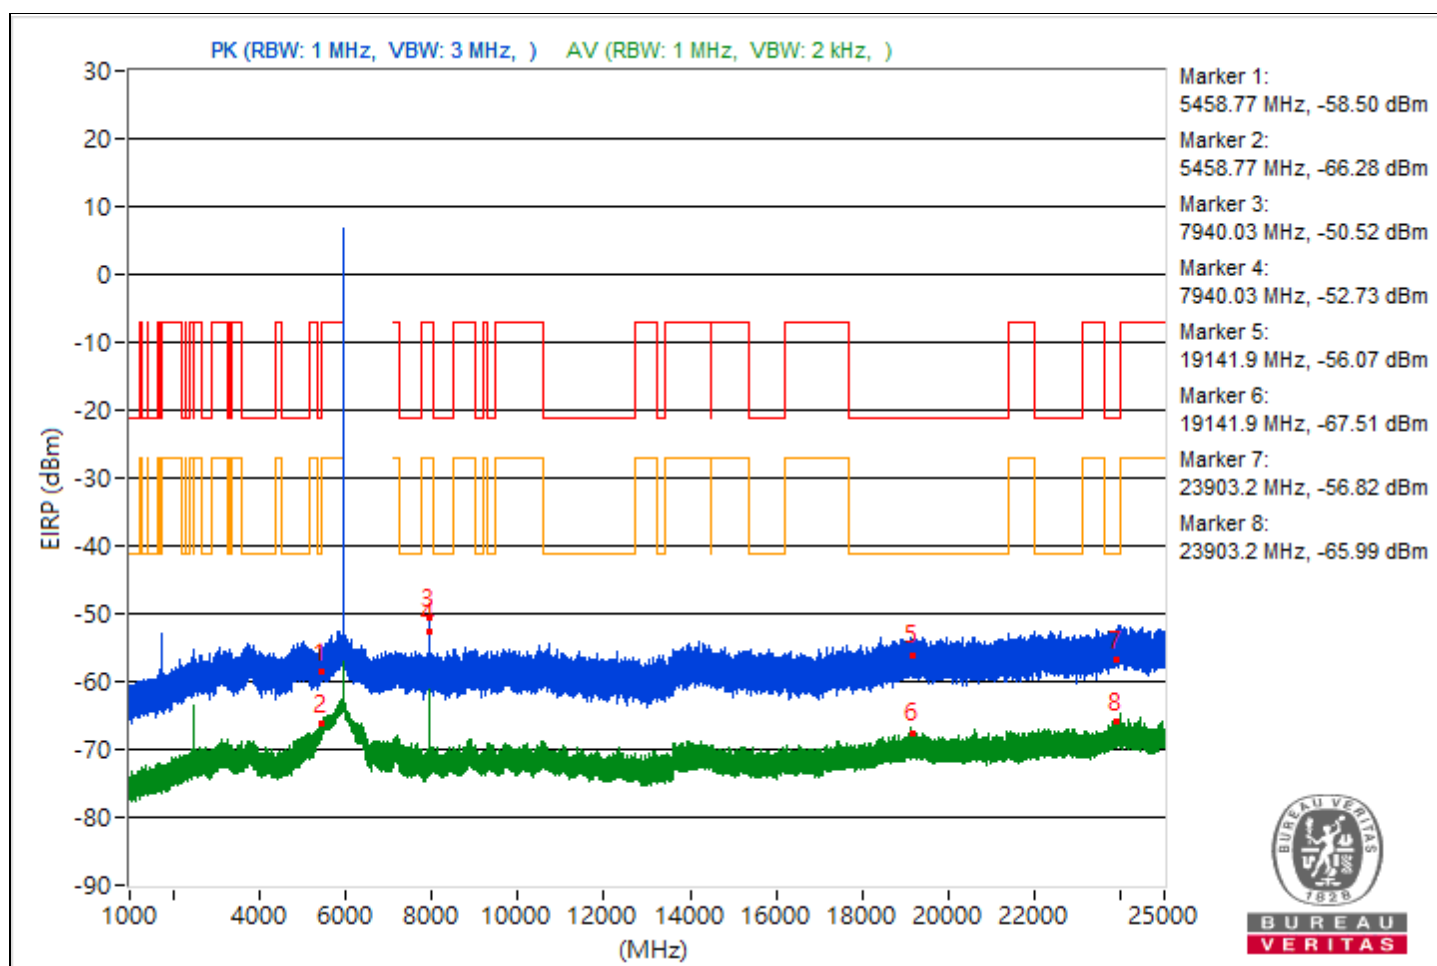


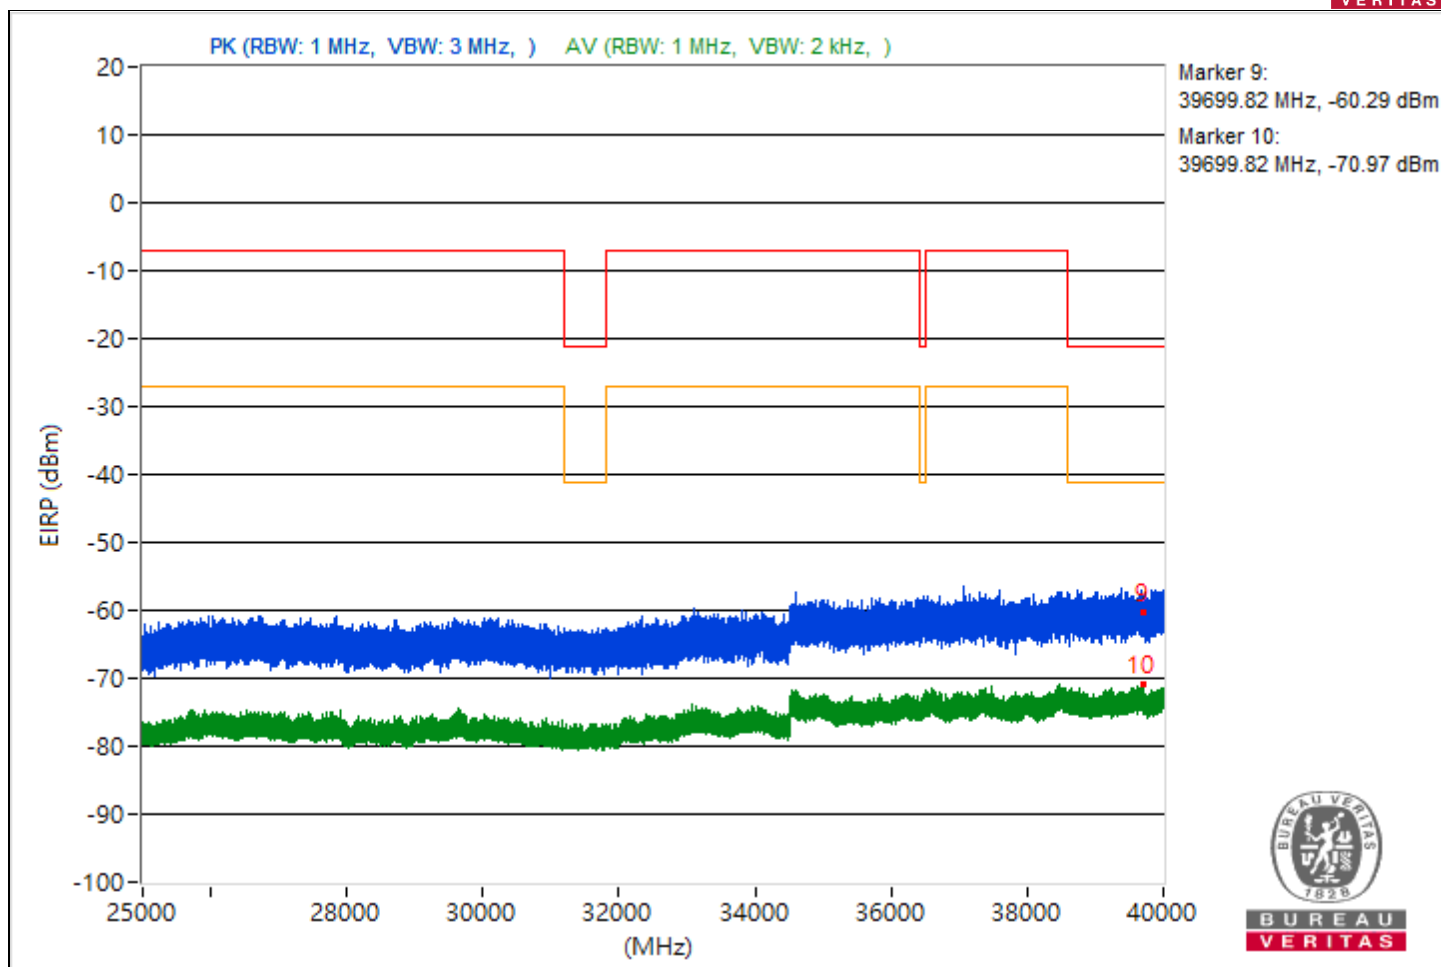


|                 |                              |                          |                  |
|-----------------|------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                  |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5435.98         | 35.84 PK                | 74             | -38.16      | -70.65                  | -70.95                  | 8.37                   | -59.42           |
| 2                            | 5435.98         | 27.88 AV                | 54             | -26.12      | -77.54                  | -80.45                  | 8.37                   | -67.38           |
| 3                            | 7267.02         | 38.32 PK                | 74             | -35.68      | -69.69                  | -67.28                  | 8.37                   | -56.94           |
| 4                            | 7267.02         | 27.38 AV                | 54             | -26.62      | -78.01                  | -81.01                  | 8.37                   | -67.88           |
| 5                            | 19114.4         | 38.08 PK                | 74             | -35.92      | -68.19                  | -68.97                  | 8.37                   | -57.18           |
| 6                            | 19114.4         | 27.86 AV                | 54             | -26.14      | -77.11                  | -81.53                  | 8.37                   | -67.4            |
| 7                            | 23949.9         | 39.96 PK                | 74             | -34.04      | -66.41                  | -66.98                  | 8.37                   | -55.3            |
| 8                            | 23949.9         | 29.4 AV                 | 54             | -24.6       | -79.21                  | -75.89                  | 8.37                   | -65.86           |
| 9                            | 39971.82        | 34.53 PK                | 74             | -39.47      | -70.67                  | -74.27                  | 8.37                   | -60.73           |
| 10                           | 39971.82        | 24.16 AV                | 54             | -29.84      | -84.53                  | -81.1                   | 8.37                   | -71.1            |

Note: Margin value = Emission Level - Limit value

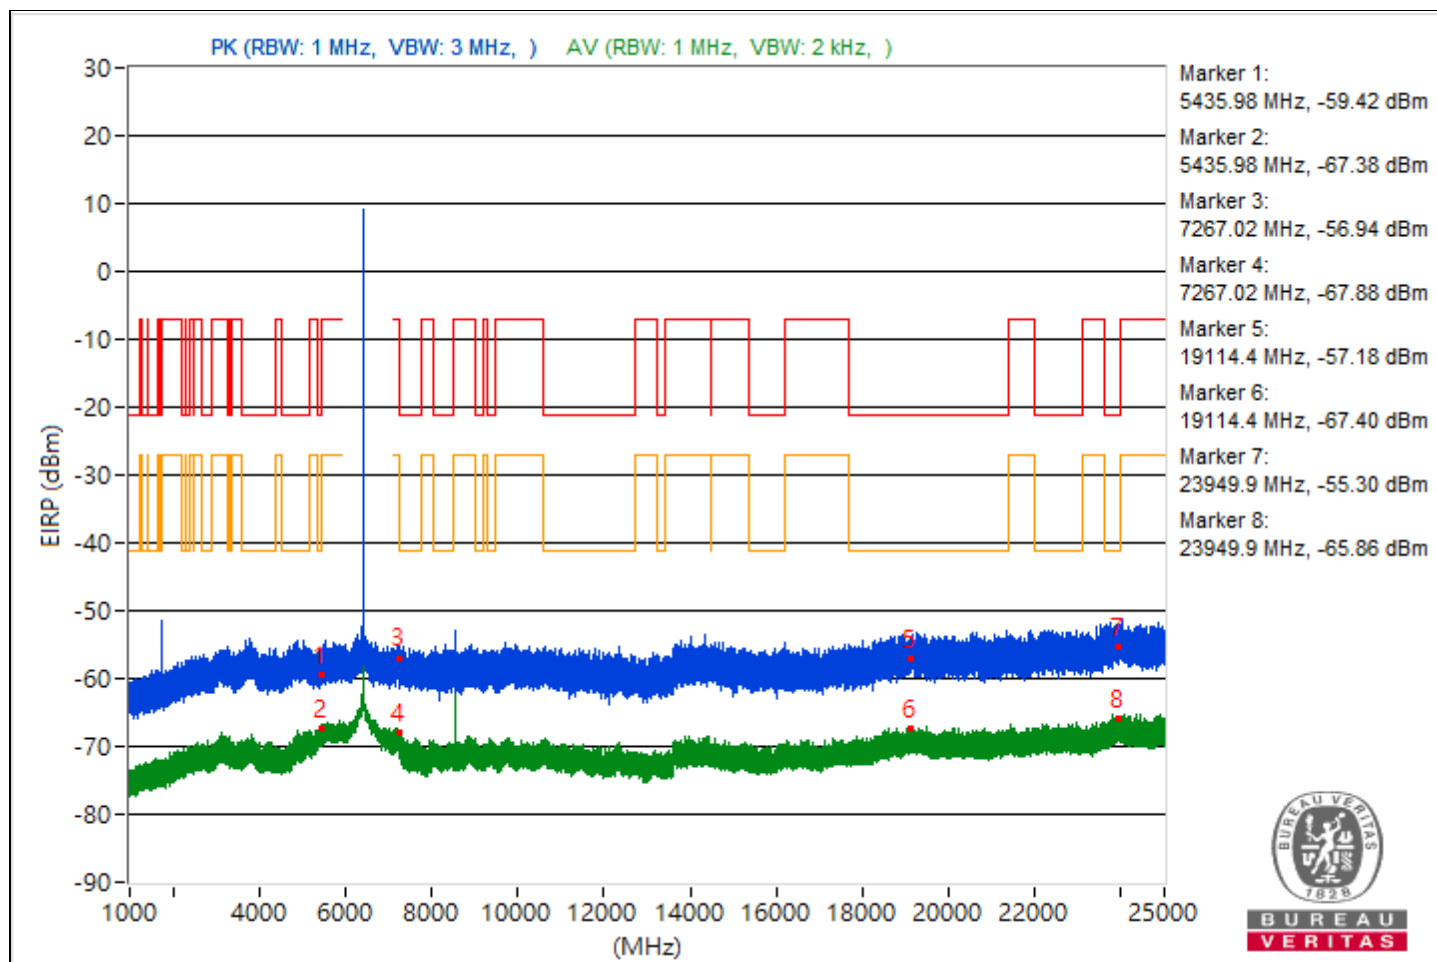


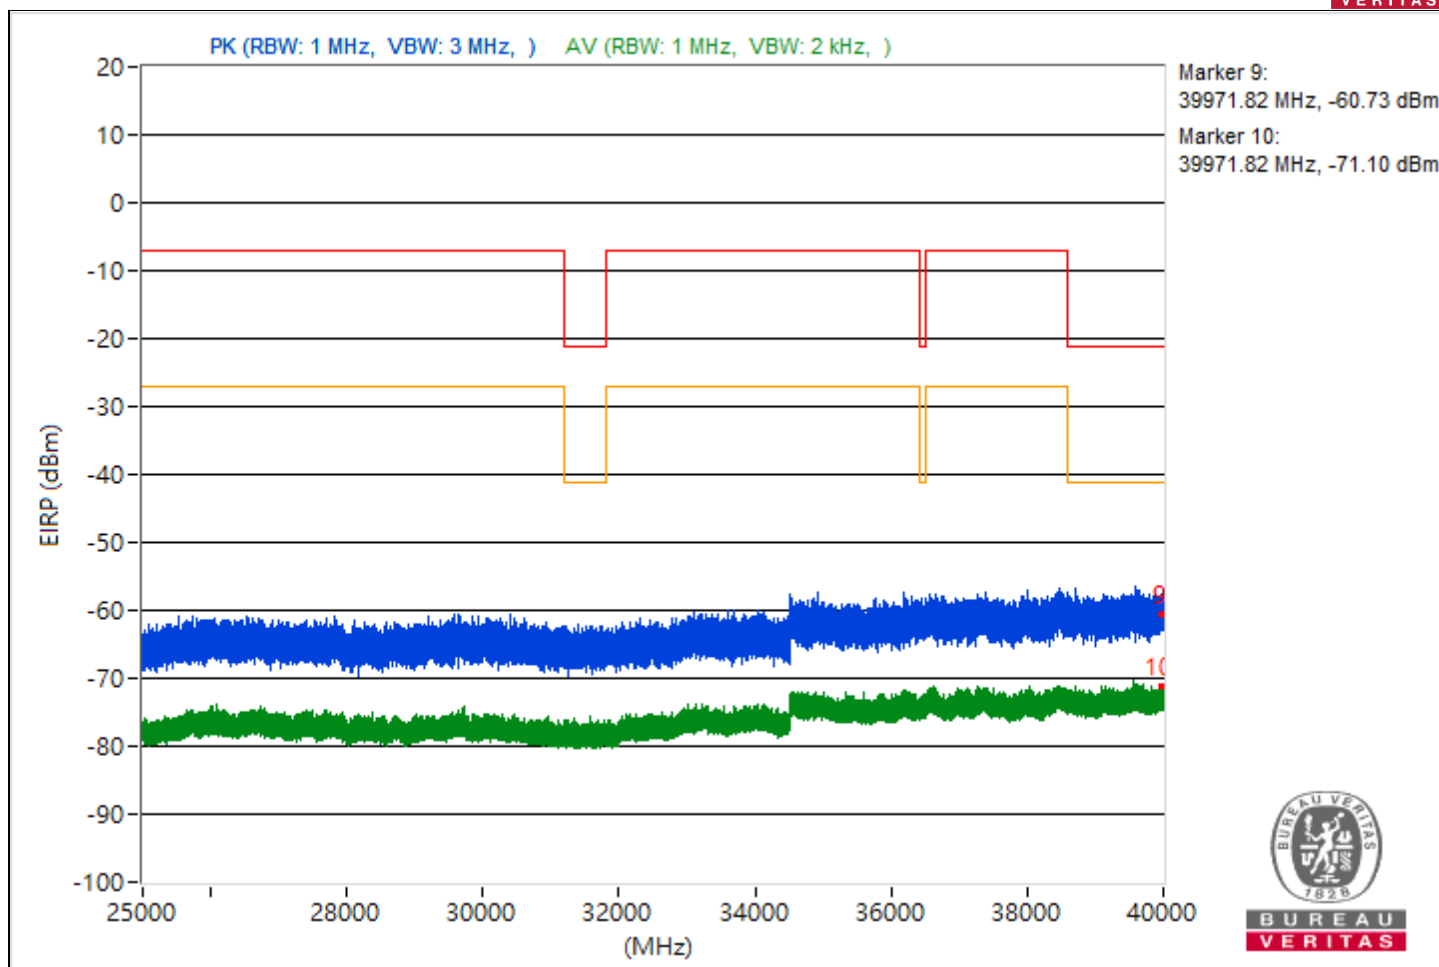


|                 |                              |                          |                  |
|-----------------|------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 97 : 6435 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                  |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5454.72         | 37.52 PK                | 74             | -36.48      | -69.3                   | -68.94                  | 8.37                   | -57.74           |
| 2                            | 5454.72         | 28.49 AV                | 54             | -25.51      | -78.12                  | -78.19                  | 8.37                   | -66.77           |
| 3                            | 7283.51         | 35.6 PK                 | 74             | -38.4       | -71.68                  | -70.49                  | 8.37                   | -59.66           |
| 4                            | 7283.51         | 27.28 AV                | 54             | -26.72      | -78.46                  | -80.5                   | 8.37                   | -67.98           |
| 5                            | 19833.8         | 39.49 PK                | 74             | -34.51      | -66.24                  | -68.3                   | 8.37                   | -55.77           |
| 6                            | 19833.8         | 27.62 AV                | 54             | -26.38      | -77.14                  | -82.42                  | 8.37                   | -67.64           |
| 7                            | 23926.3         | 41.56 PK                | 74             | -32.44      | -65.85                  | -64.43                  | 8.37                   | -53.7            |
| 8                            | 23926.3         | 29.83 AV                | 54             | -24.17      | -78.37                  | -75.67                  | 8.37                   | -65.43           |
| 9                            | 39631.11        | 35.27 PK                | 74             | -38.73      | -70.55                  | -72.38                  | 8.37                   | -59.99           |
| 10                           | 39631.11        | 24.3 AV                 | 54             | -29.7       | -83.73                  | -81.29                  | 8.37                   | -70.96           |

Note: Margin value = Emission Level - Limit value

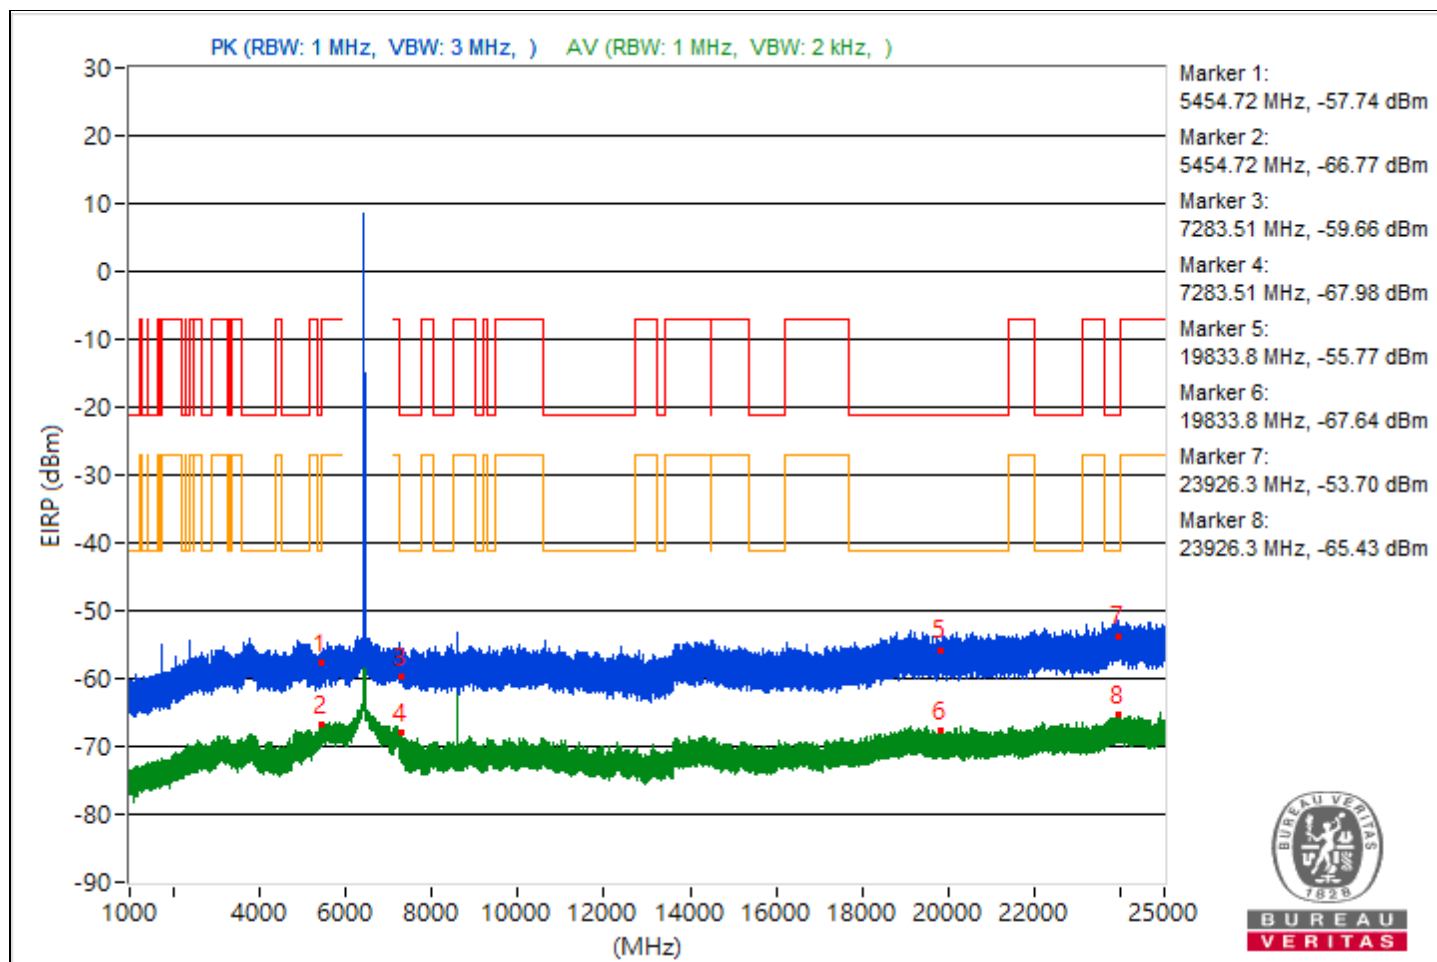


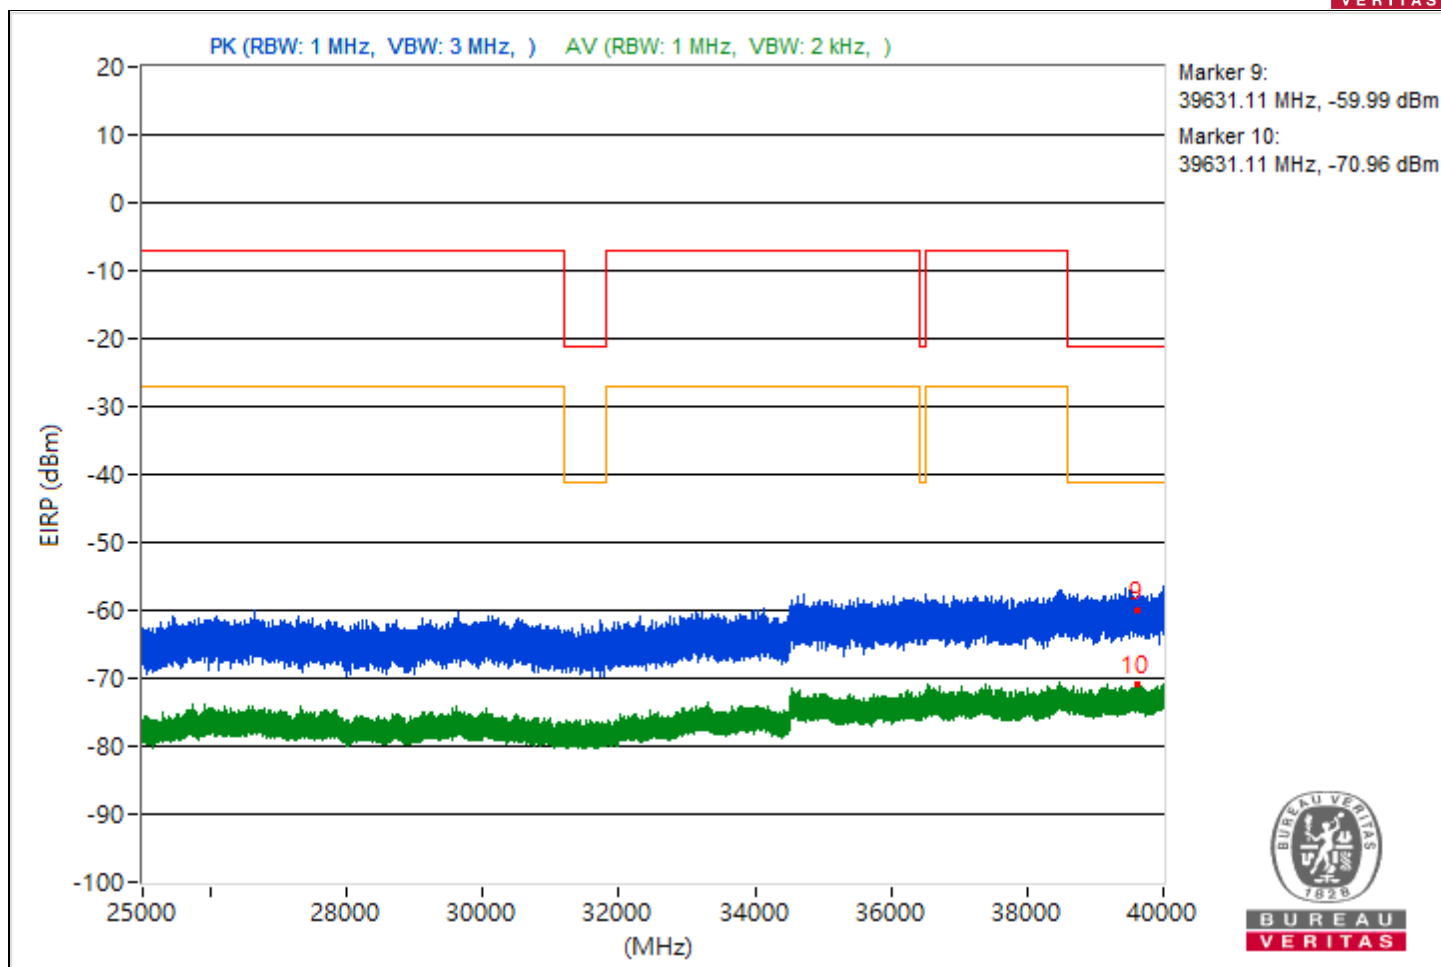


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 113 : 6515 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                  |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5419.72         | 35.6 PK                 | 74             | -38.4       | -70.42                  | -71.75                  | 8.37                   | -59.66           |
| 2                            | 5419.72         | 28.17 AV                | 54             | -25.83      | -77.3                   | -80.07                  | 8.37                   | -67.09           |
| 3                            | 7252.32         | 37.35 PK                | 74             | -36.65      | -68.77                  | -69.89                  | 8.37                   | -57.91           |
| 4                            | 7252.32         | 27.5 AV                 | 54             | -26.5       | -80.13                  | -78.33                  | 8.37                   | -67.76           |
| 5                            | 19356.2         | 37.45 PK                | 74             | -36.55      | -69.36                  | -69.02                  | 8.37                   | -57.81           |
| 6                            | 19356.2         | 27.84 AV                | 54             | -26.16      | -77.12                  | -81.59                  | 8.37                   | -67.42           |
| 7                            | 23925.1         | 41.15 PK                | 74             | -32.85      | -65.92                  | -65.09                  | 8.37                   | -54.11           |
| 8                            | 23925.1         | 29.58 AV                | 54             | -24.42      | -75.84                  | -78.77                  | 8.37                   | -65.68           |
| 9                            | 39122.67        | 34.92 PK                | 74             | -39.08      | -72.44                  | -71.1                   | 8.37                   | -60.34           |
| 10                           | 39122.67        | 24.19 AV                | 54             | -29.81      | -81.07                  | -84.48                  | 8.37                   | -71.07           |

Note: Margin value = Emission Level - Limit value

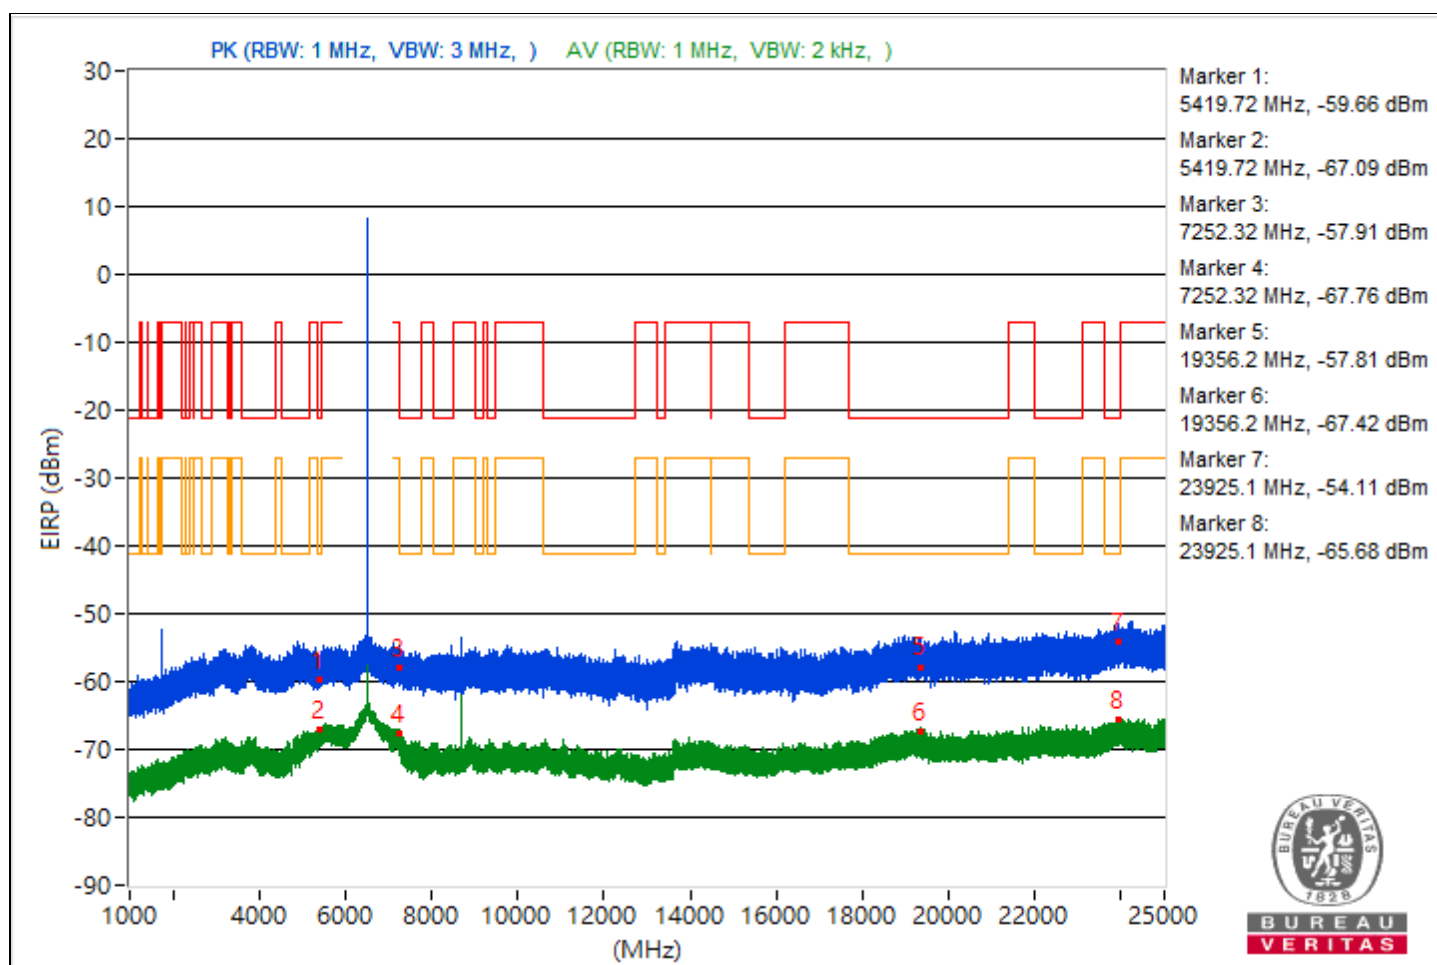


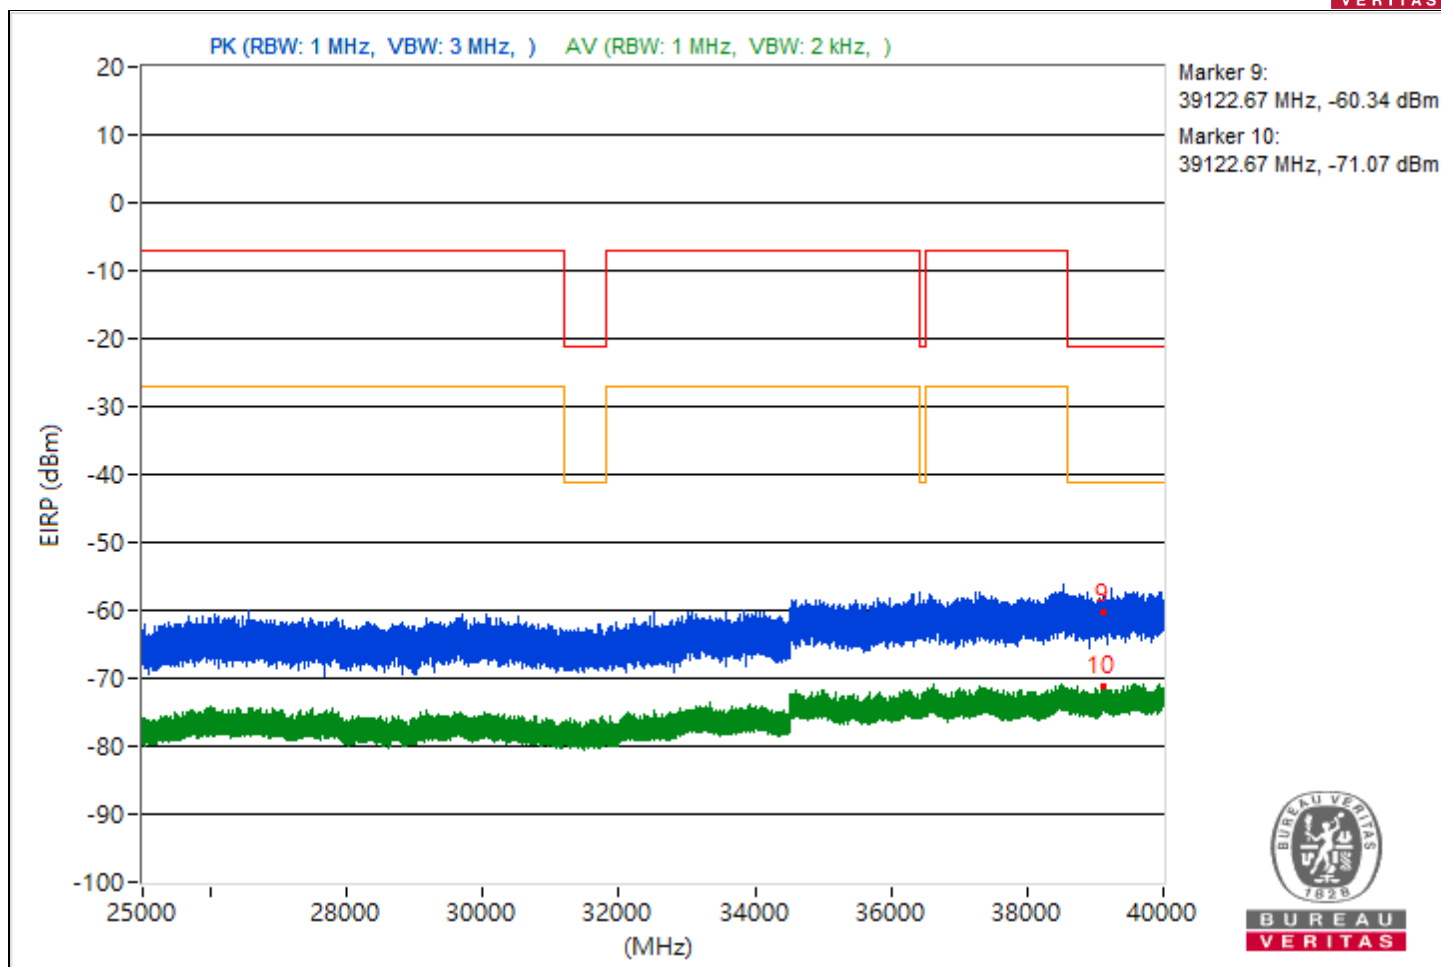


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                  |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5458.69         | 35.82 PK                | 74             | -38.18      | -70.57                  | -71.09                  | 8.37                   | -59.44           |
| 2                            | 5458.69         | 28.2 AV                 | 54             | -25.8       | -77.4                   | -79.82                  | 8.37                   | -67.06           |
| 3                            | 7256.13         | 36.49 PK                | 74             | -37.51      | -71.25                  | -69.27                  | 8.37                   | -58.77           |
| 4                            | 7256.13         | 28.09 AV                | 54             | -25.91      | -79.13                  | -78.03                  | 8.37                   | -67.17           |
| 5                            | 20481.6         | 38.93 PK                | 74             | -35.07      | -67.25                  | -68.23                  | 8.37                   | -56.33           |
| 6                            | 20481.6         | 28 AV                   | 54             | -26         | -76.86                  | -81.73                  | 8.37                   | -67.26           |
| 7                            | 23915.5         | 41.56 PK                | 74             | -32.44      | -64.93                  | -65.23                  | 8.37                   | -53.7            |
| 8                            | 23915.5         | 29.44 AV                | 54             | -24.56      | -79.07                  | -75.9                   | 8.37                   | -65.82           |
| 9                            | 39973.24        | 33.78 PK                | 74             | -40.22      | -71.39                  | -75.1                   | 8.37                   | -61.48           |
| 10                           | 39973.24        | 24.01 AV                | 54             | -29.99      | -81.34                  | -84.47                  | 8.37                   | -71.25           |

Note: Margin value = Emission Level - Limit value

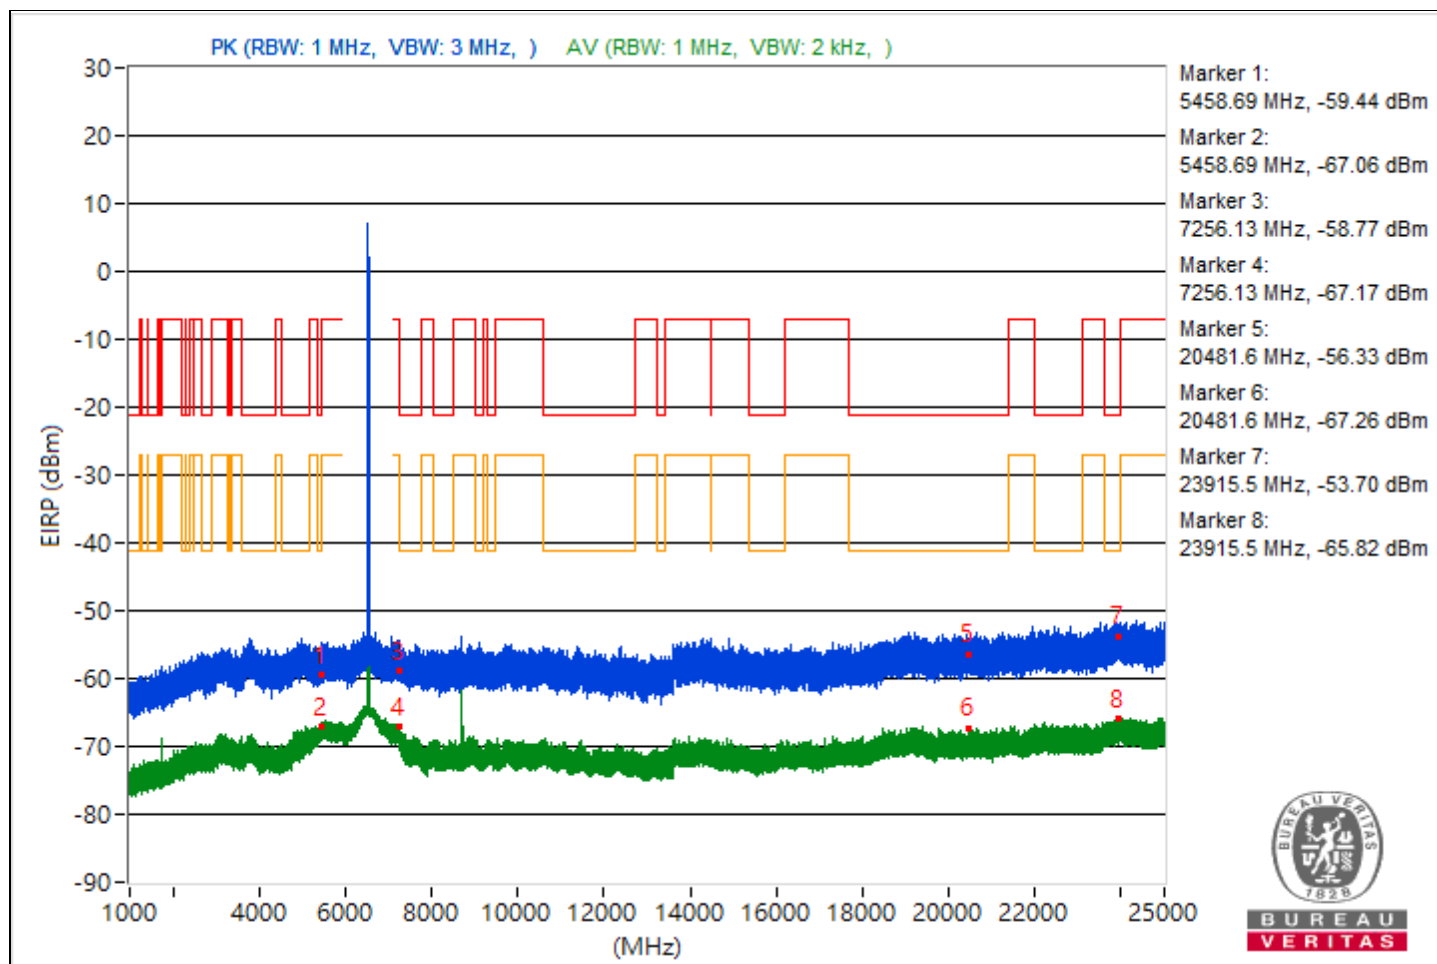


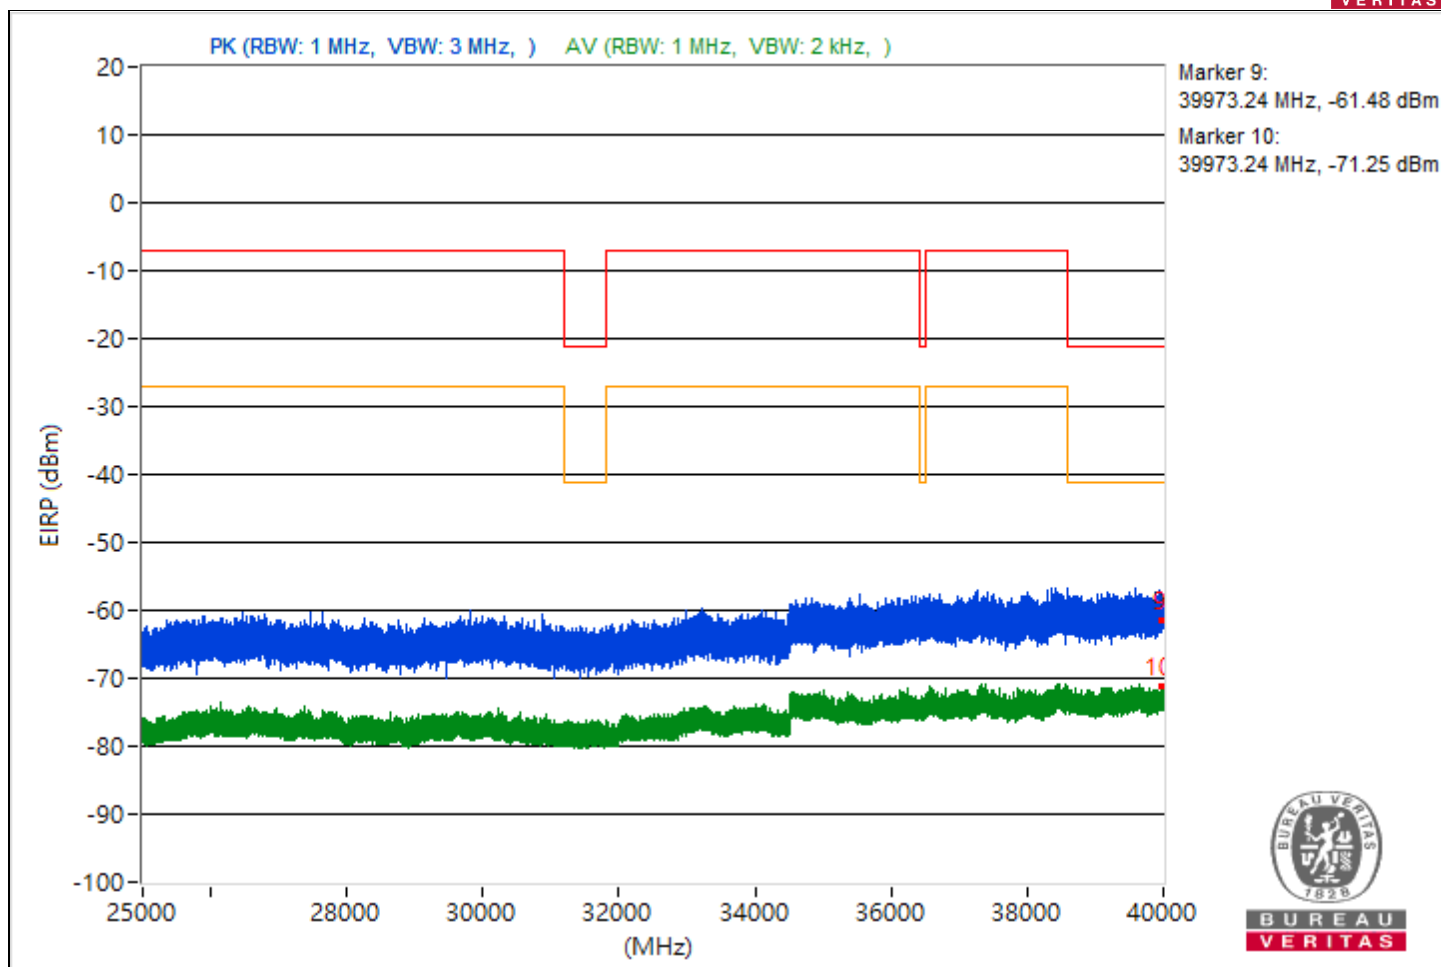


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                  |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459.78         | 36.54 PK                | 74             | -37.46      | -69.56                  | -70.73                  | 8.37                   | -58.72           |
| 2                            | 5459.78         | 28.33 AV                | 54             | -25.67      | -77.42                  | -79.43                  | 8.37                   | -66.93           |
| 3                            | 9166.67         | 41.74 PK                | 74             | -32.26      | -62.68                  | -69.65                  | 8.37                   | -53.52           |
| 4                            | 9166.67         | 34.61 AV                | 54             | -19.39      | -69.53                  | -78.56                  | 8.37                   | -60.65           |
| 5                            | 19473.4         | 39.47 PK                | 74             | -34.53      | -65.12                  | -71.16                  | 8.37                   | -55.79           |
| 6                            | 19473.4         | 27.61 AV                | 54             | -26.39      | -77.79                  | -80.79                  | 8.37                   | -67.65           |
| 7                            | 23939.9         | 41.2 PK                 | 74             | -32.8       | -64.46                  | -66.71                  | 8.37                   | -54.06           |
| 8                            | 23939.9         | 29.68 AV                | 54             | -24.32      | -75.23                  | -79.88                  | 8.37                   | -65.58           |
| 9                            | 38641.07        | 34.77 PK                | 74             | -39.23      | -72.46                  | -71.35                  | 8.37                   | -60.49           |
| 10                           | 38641.07        | 24.1 AV                 | 54             | -29.9       | -85.3                   | -80.87                  | 8.37                   | -71.16           |

Note: Margin value = Emission Level - Limit value

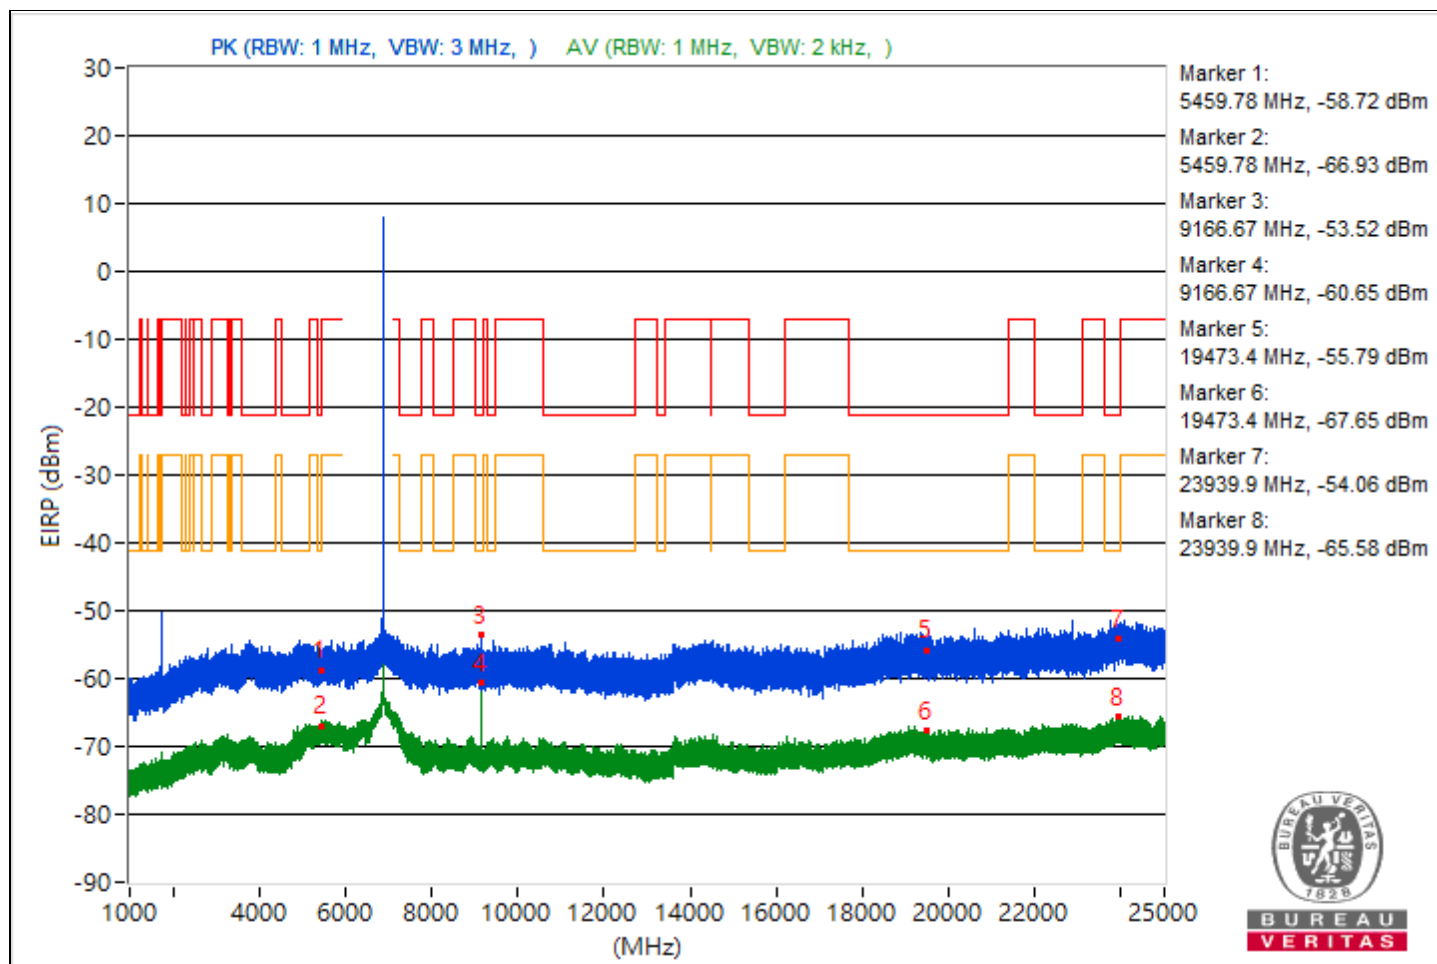


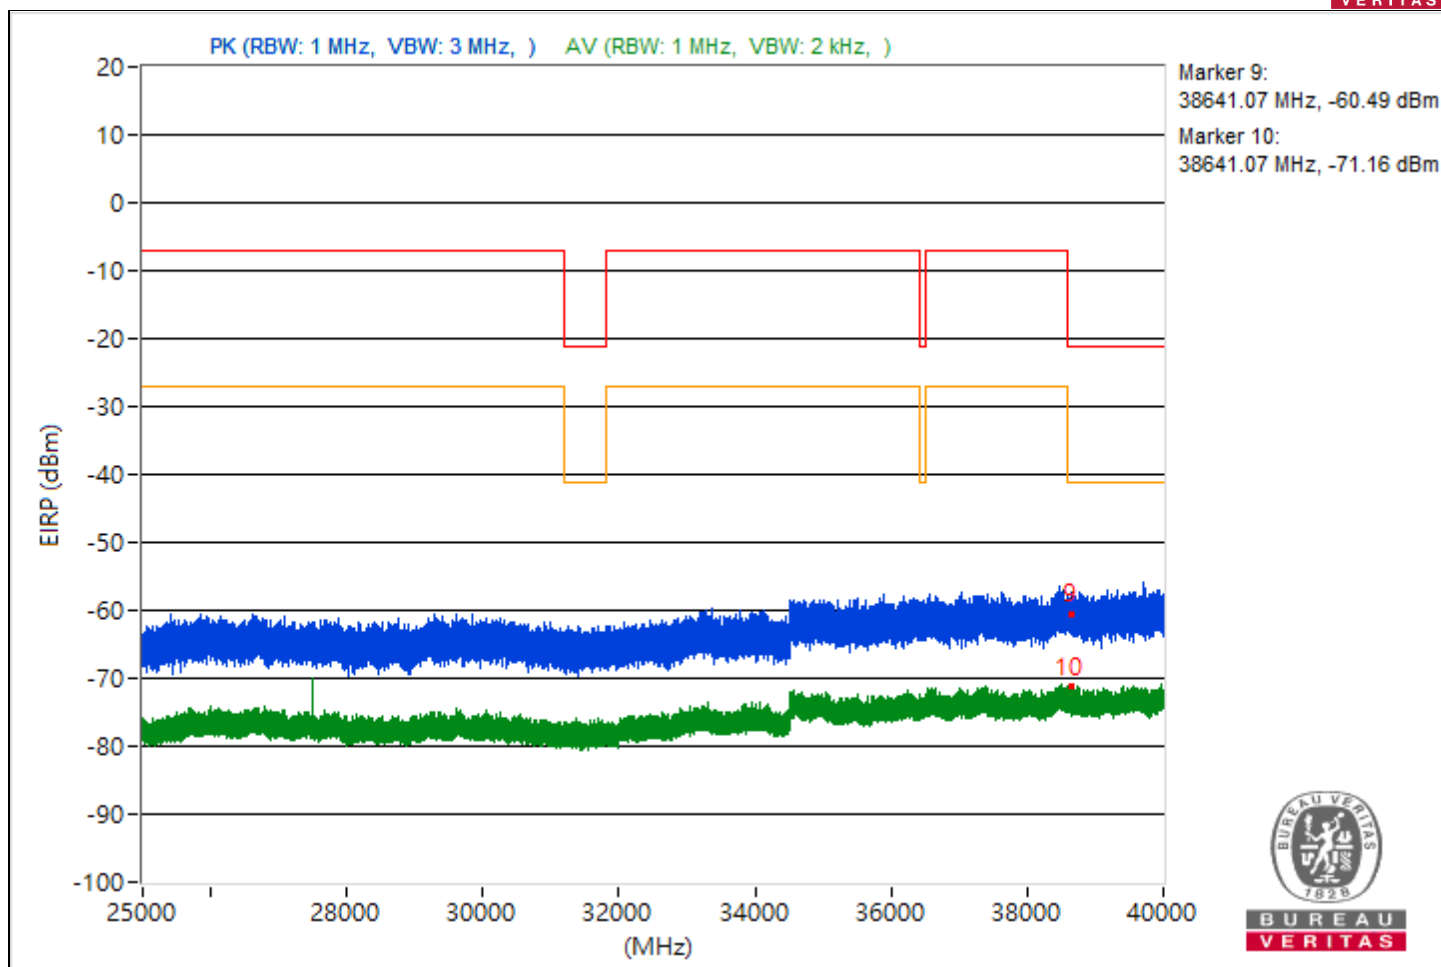

|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                  |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5426.18         | 36.89 PK                | 74             | -37.11      | -69.61                  | -69.9                   | 8.37                   | -58.37           |
| 2                            | 5426.18         | 28.48 AV                | 54             | -25.52      | -79.03                  | -77.43                  | 8.37                   | -66.78           |
| 3                            | 9140.27         | 42.72 PK                | 74             | -31.28      | -61.35                  | -71.02                  | 8.37                   | -52.54           |
| 4                            | 9140.27         | 33.91 AV                | 54             | -20.09      | -70.15                  | -80.03                  | 8.37                   | -61.35           |
| 5                            | 19298.9         | 39.14 PK                | 74             | -34.86      | -69.3                   | -66.24                  | 8.37                   | -56.12           |
| 6                            | 19298.9         | 27.85 AV                | 54             | -26.15      | -77.42                  | -80.81                  | 8.37                   | -67.41           |
| 7                            | 23898.2         | 41.89 PK                | 74             | -32.11      | -65.61                  | -64.03                  | 8.37                   | -53.37           |
| 8                            | 23898.2         | 29.61 AV                | 54             | -24.39      | -75.09                  | -80.64                  | 8.37                   | -65.65           |
| 9                            | 39614.84        | 34.96 PK                | 74             | -39.04      | -70.92                  | -72.6                   | 8.37                   | -60.3            |
| 10                           | 39614.84        | 23.64 AV                | 54             | -30.36      | -85.73                  | -81.33                  | 8.37                   | -71.62           |

Note: Margin value = Emission Level - Limit value

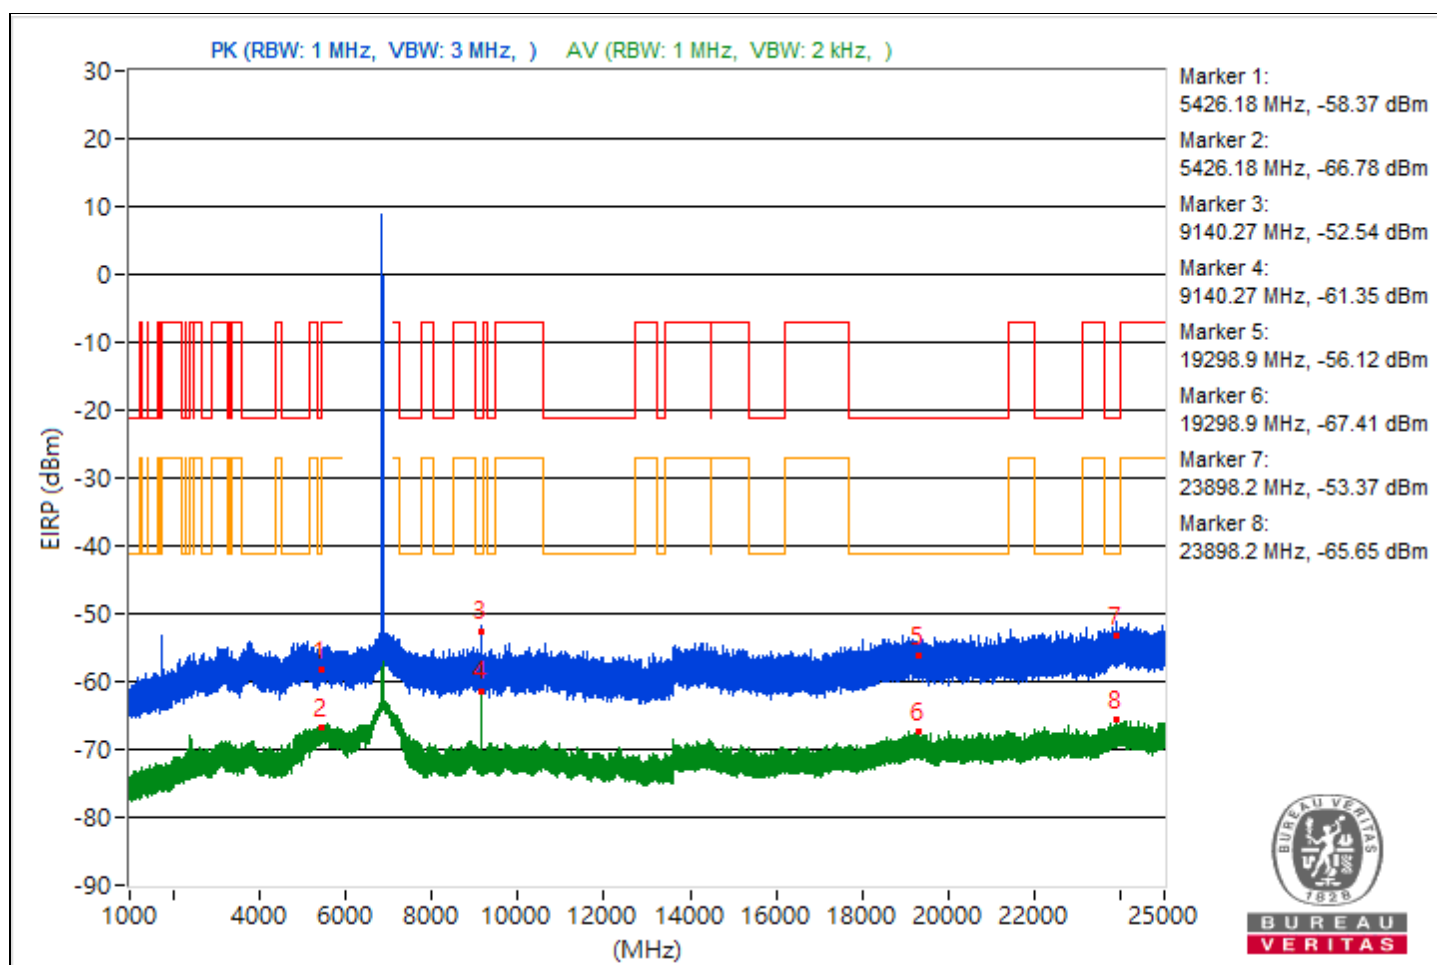





|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                  |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5454.49         | 37.86 PK                | 74             | -36.14      | -67.32                  | -70.97                  | 8.37                   | -57.4            |
| 2                            | 5454.49         | 28.83 AV                | 54             | -25.17      | -76.96                  | -78.87                  | 8.37                   | -66.43           |
| 3                            | 9486.49         | 39.54 PK                | 74             | -34.46      | -64.97                  | -71.49                  | 8.37                   | -55.72           |
| 4                            | 9486.49         | 31.29 AV                | 54             | -22.71      | -73.06                  | -80.51                  | 8.37                   | -63.97           |
| 5                            | 19175.2         | 38.33 PK                | 74             | -35.67      | -68.09                  | -68.55                  | 8.37                   | -56.93           |
| 6                            | 19175.2         | 27.94 AV                | 54             | -26.06      | -77.02                  | -81.47                  | 8.37                   | -67.32           |
| 7                            | 23943.1         | 42.61 PK                | 74             | -31.39      | -66.48                  | -62.47                  | 8.37                   | -52.65           |
| 8                            | 23943.1         | 29.52 AV                | 54             | -24.48      | -75.94                  | -78.77                  | 8.37                   | -65.74           |
| 9                            | 39593.51        | 34.88 PK                | 74             | -39.12      | -71.74                  | -71.77                  | 8.37                   | -60.38           |
| 10                           | 39593.51        | 24.46 AV                | 54             | -29.54      | -80.61                  | -84.68                  | 8.37                   | -70.8            |

Note: Margin value = Emission Level - Limit value

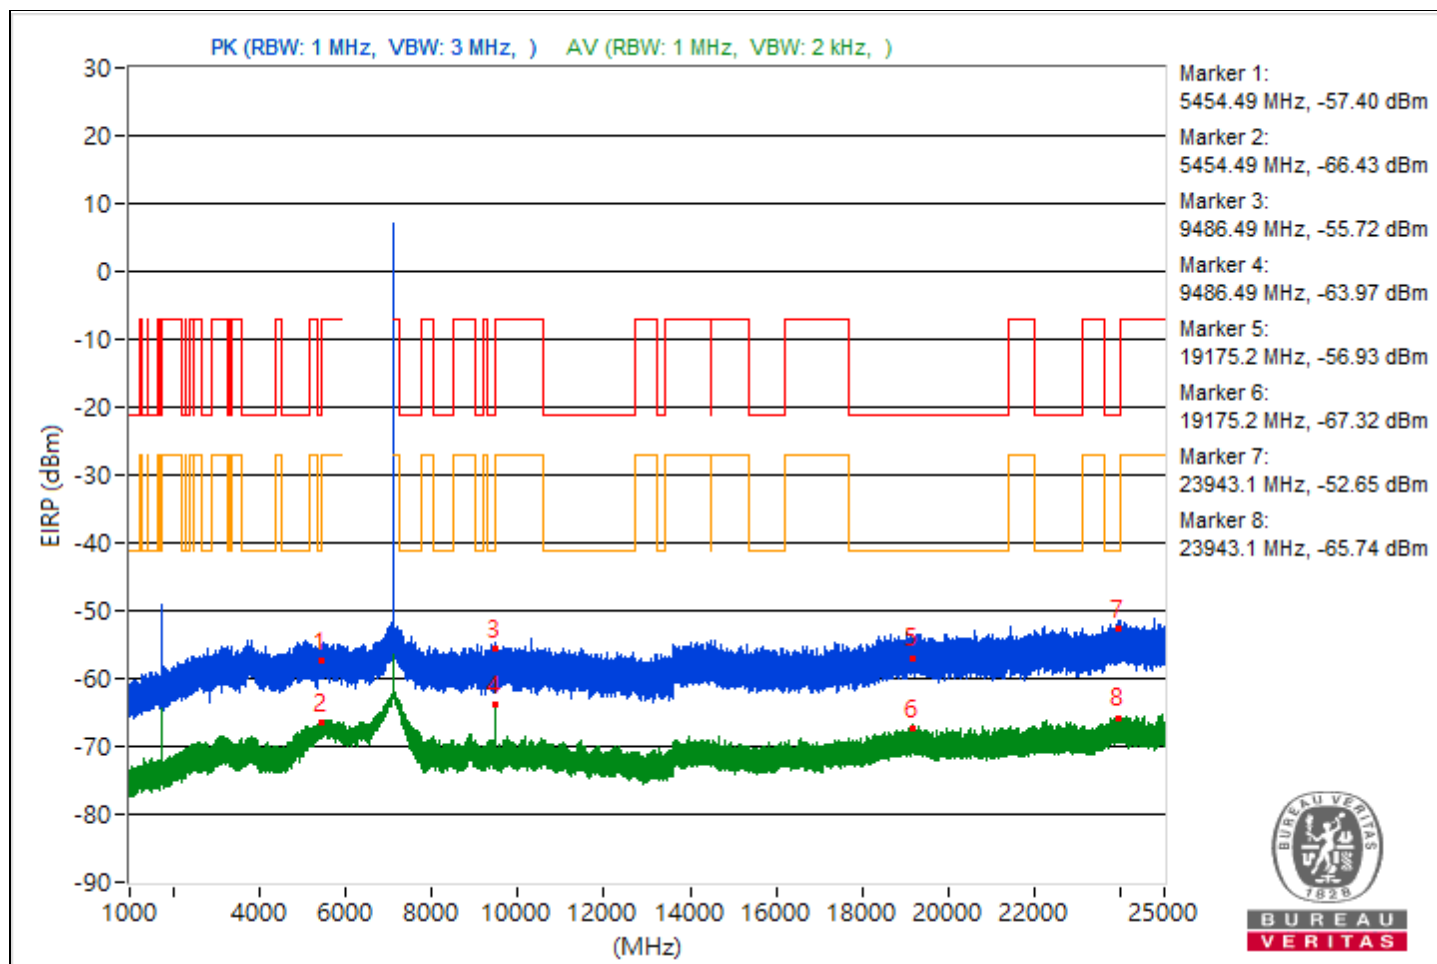

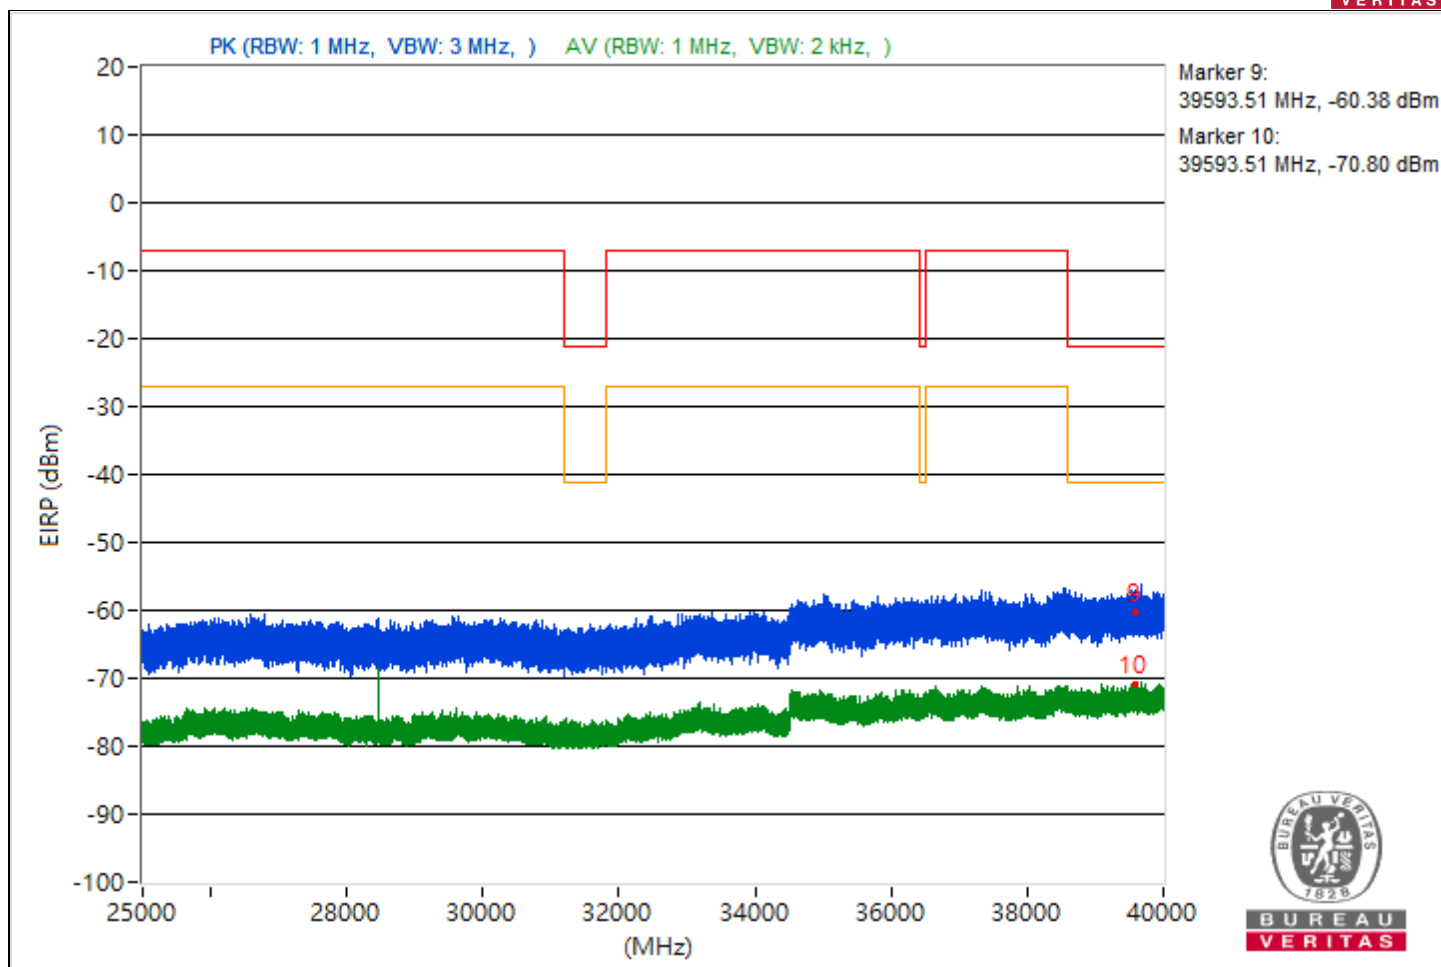



|                 |                                |                          |                 |
|-----------------|--------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                 | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                    |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5457.83         | 36.99 PK                | 74             | -37.01      | -70.13                  | -69.22                  | 8.37                   | -58.27           |
| 2                            | 5457.83         | 29.2 AV                 | 54             | -24.8       | -77.24                  | -77.65                  | 8.37                   | -66.06           |
| 3                            | #7940.03        | 44.24 PK                | 88.26          | -44.02      | -59.96                  | -68.5                   | 8.37                   | -51.02           |
| 4                            | #7940.03        | 42.2 AV                 | 68.26          | -26.06      | -61.52                  | -78.34                  | 8.37                   | -53.06           |
| 5                            | 19171.8         | 38.87 PK                | 74             | -35.13      | -66.58                  | -69.42                  | 8.37                   | -56.39           |
| 6                            | 19171.8         | 28.21 AV                | 54             | -25.79      | -77.41                  | -79.77                  | 8.37                   | -67.05           |
| 7                            | 23909.2         | 40.43 PK                | 74             | -33.57      | -65.92                  | -66.53                  | 8.37                   | -54.83           |
| 8                            | 23909.2         | 29.55 AV                | 54             | -24.45      | -75.67                  | -79.21                  | 8.37                   | -65.71           |
| 9                            | 39699.56        | 36.73 PK                | 74             | -37.27      | -70.62                  | -69.31                  | 8.37                   | -58.53           |
| 10                           | 39699.56        | 24.94 AV                | 54             | -29.06      | -80.89                  | -82.71                  | 8.37                   | -70.32           |

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

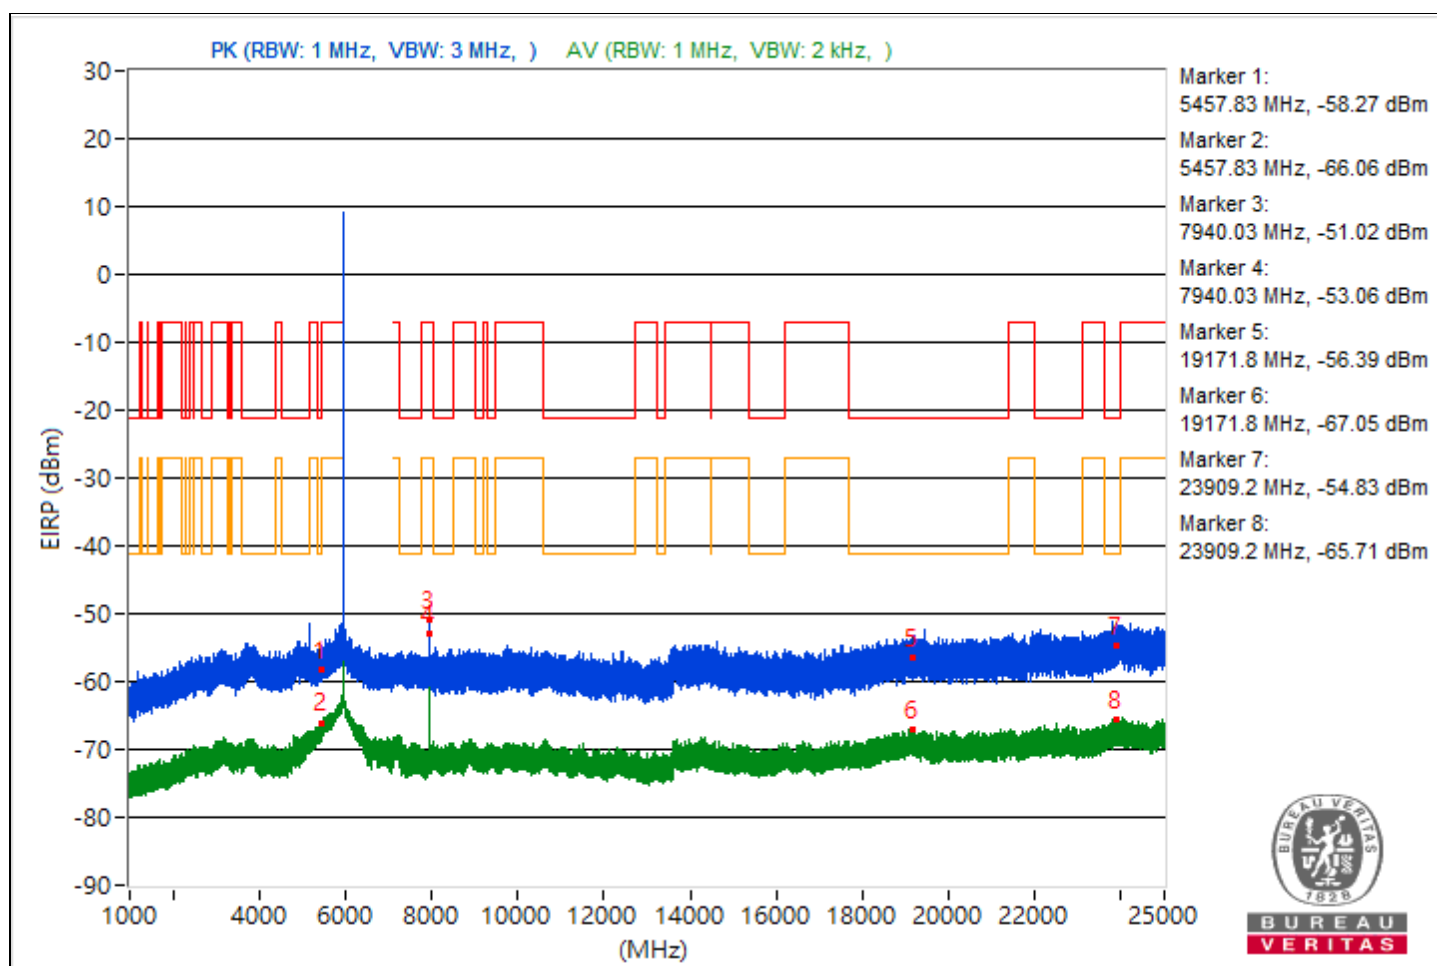


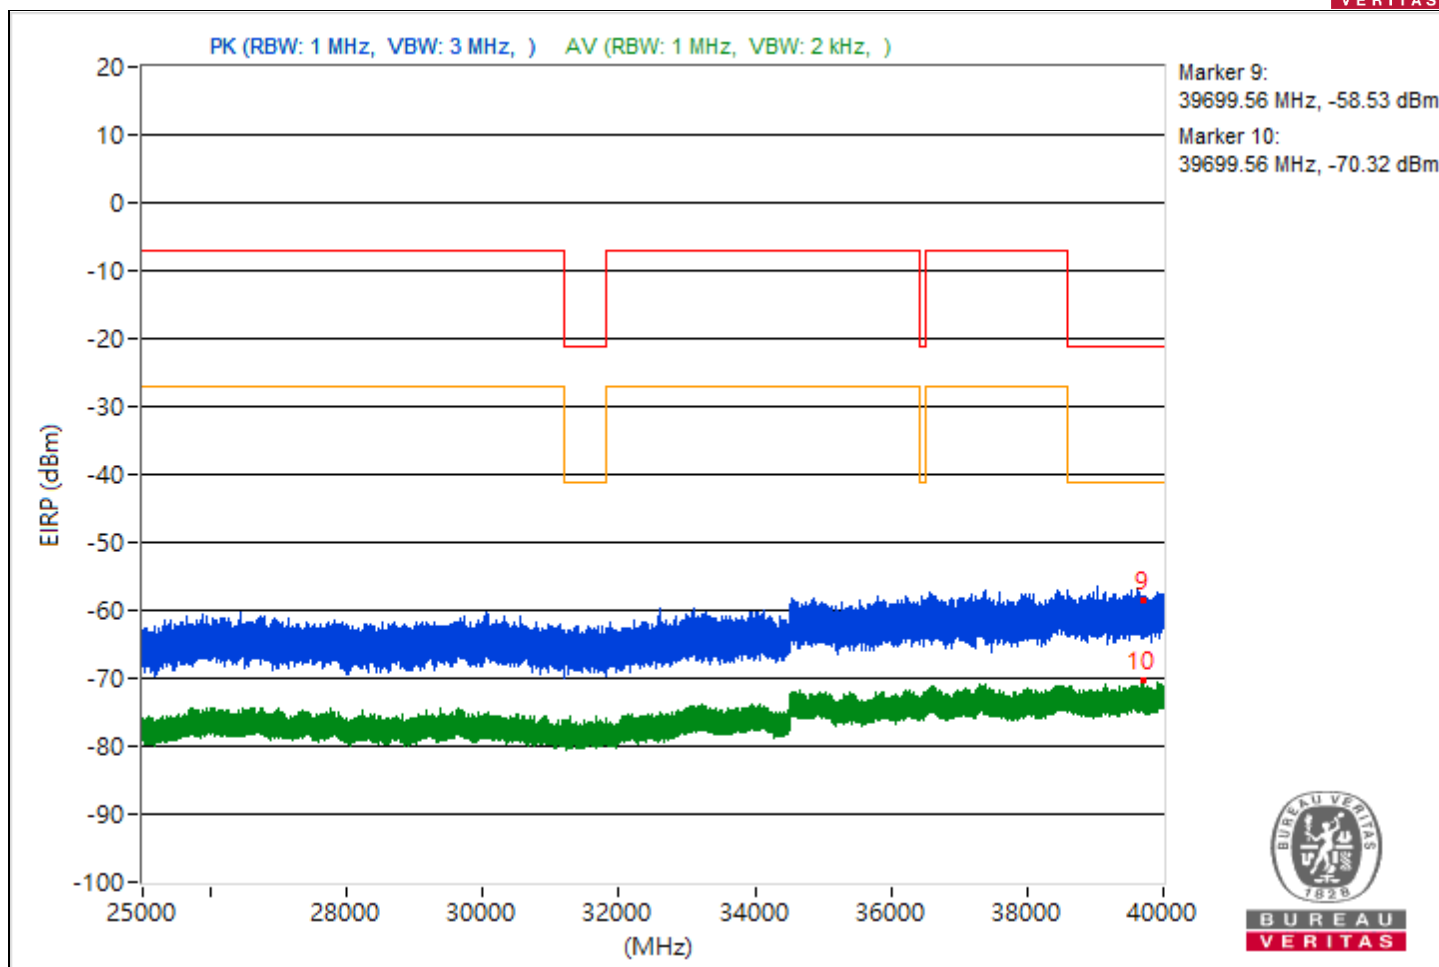


|                 |                                |                          |                  |
|-----------------|--------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                 | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                    |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5439.79         | 36.49 PK                | 74             | -37.51      | -70.71                  | -69.65                  | 8.37                   | -58.77           |
| 2                            | 5439.79         | 28.08 AV                | 54             | -25.92      | -78.04                  | -79.15                  | 8.37                   | -67.18           |
| 3                            | 7276.51         | 36.1 PK                 | 74             | -37.9       | -70.32                  | -70.78                  | 8.37                   | -59.16           |
| 4                            | 7276.51         | 27.04 AV                | 54             | -26.96      | -81.15                  | -78.47                  | 8.37                   | -68.22           |
| 5                            | 19152.2         | 37.56 PK                | 74             | -36.44      | -68.77                  | -69.41                  | 8.37                   | -57.7            |
| 6                            | 19152.2         | 27.7 AV                 | 54             | -26.3       | -80.94                  | -77.57                  | 8.37                   | -67.56           |
| 7                            | 23917.9         | 41.49 PK                | 74             | -32.51      | -64.21                  | -66.36                  | 8.37                   | -53.77           |
| 8                            | 23917.9         | 29.75 AV                | 54             | -24.25      | -75.65                  | -78.62                  | 8.37                   | -65.51           |
| 9                            | 39882.4         | 34.03 PK                | 74             | -39.97      | -73.29                  | -72.02                  | 8.37                   | -61.23           |
| 10                           | 39882.4         | 23.88 AV                | 54             | -30.12      | -81.02                  | -85.71                  | 8.37                   | -71.38           |

Note: Margin value = Emission Level - Limit value

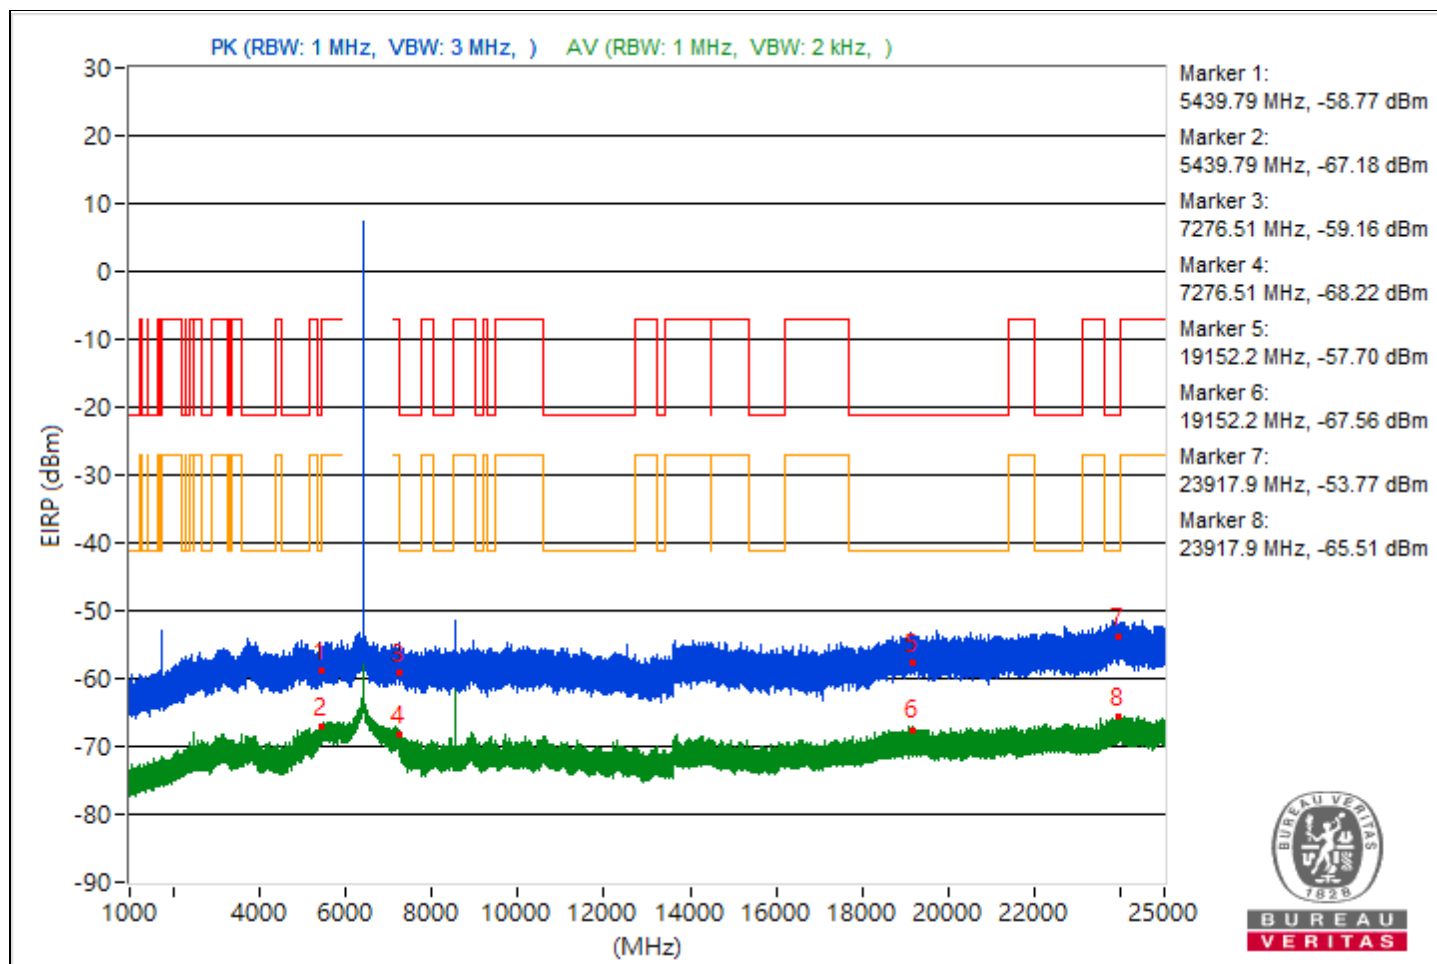


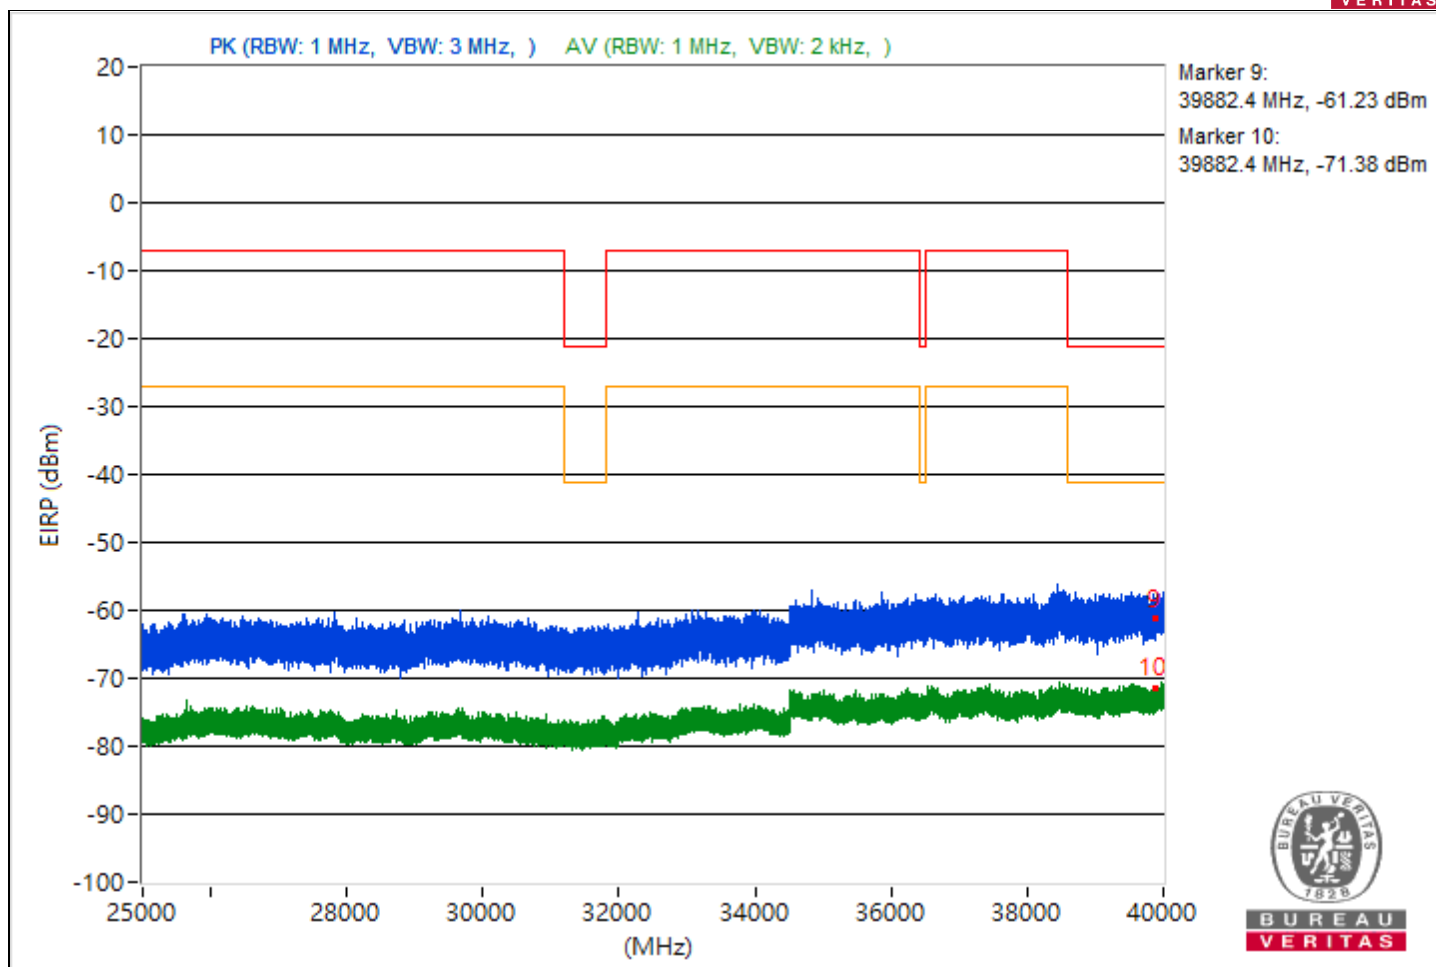


|                 |                                |                          |                  |
|-----------------|--------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 97 : 6435 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                 | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                    |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5375            | 37.15 PK                | 74             | -36.85      | -70.19                  | -68.88                  | 8.37                   | -58.11           |
| 2                            | 5375            | 27.68 AV                | 54             | -26.32      | -80.15                  | -78.02                  | 8.37                   | -67.58           |
| 3                            | 7269.74         | 36.38 PK                | 74             | -37.62      | -70.69                  | -69.87                  | 8.37                   | -58.88           |
| 4                            | 7269.74         | 26.82 AV                | 54             | -27.18      | -78.47                  | -81.8                   | 8.37                   | -68.44           |
| 5                            | 19117.8         | 38.83 PK                | 74             | -35.17      | -69.97                  | -66.38                  | 8.37                   | -56.43           |
| 6                            | 19117.8         | 28.31 AV                | 54             | -25.69      | -81.02                  | -76.69                  | 8.37                   | -66.95           |
| 7                            | 23822.9         | 40.14 PK                | 74             | -33.86      | -66.88                  | -66.15                  | 8.37                   | -55.12           |
| 8                            | 23822.9         | 29.34 AV                | 54             | -24.66      | -75.71                  | -79.85                  | 8.37                   | -65.92           |
| 9                            | 39923.56        | 35.05 PK                | 74             | -38.95      | -72.74                  | -70.69                  | 8.37                   | -60.21           |
| 10                           | 39923.56        | 24.24 AV                | 54             | -29.76      | -85.31                  | -80.68                  | 8.37                   | -71.02           |

Note: Margin value = Emission Level - Limit value

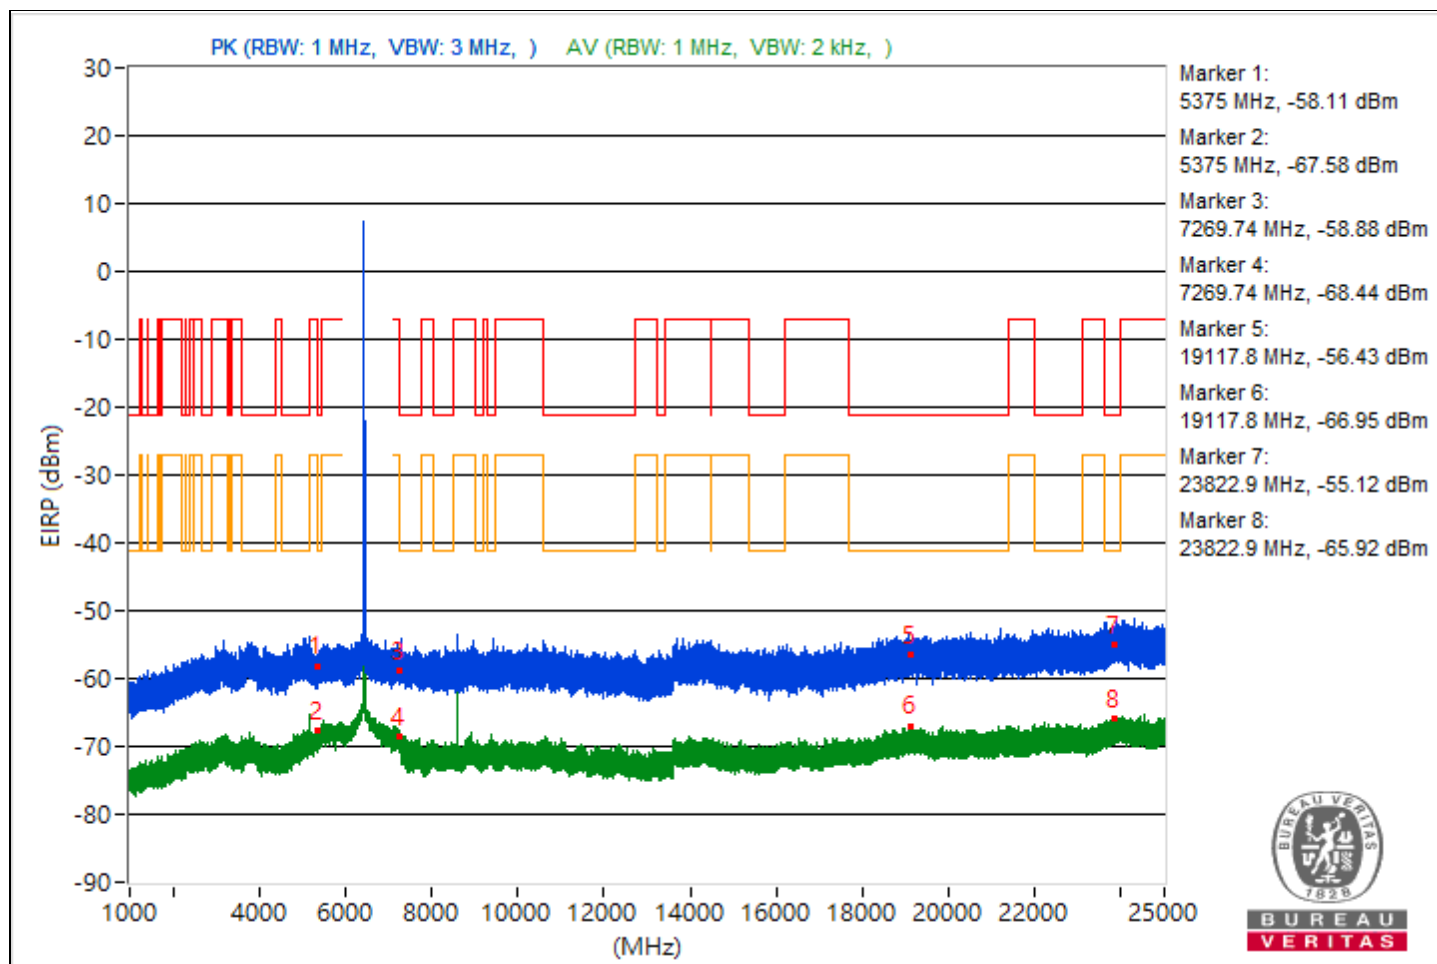


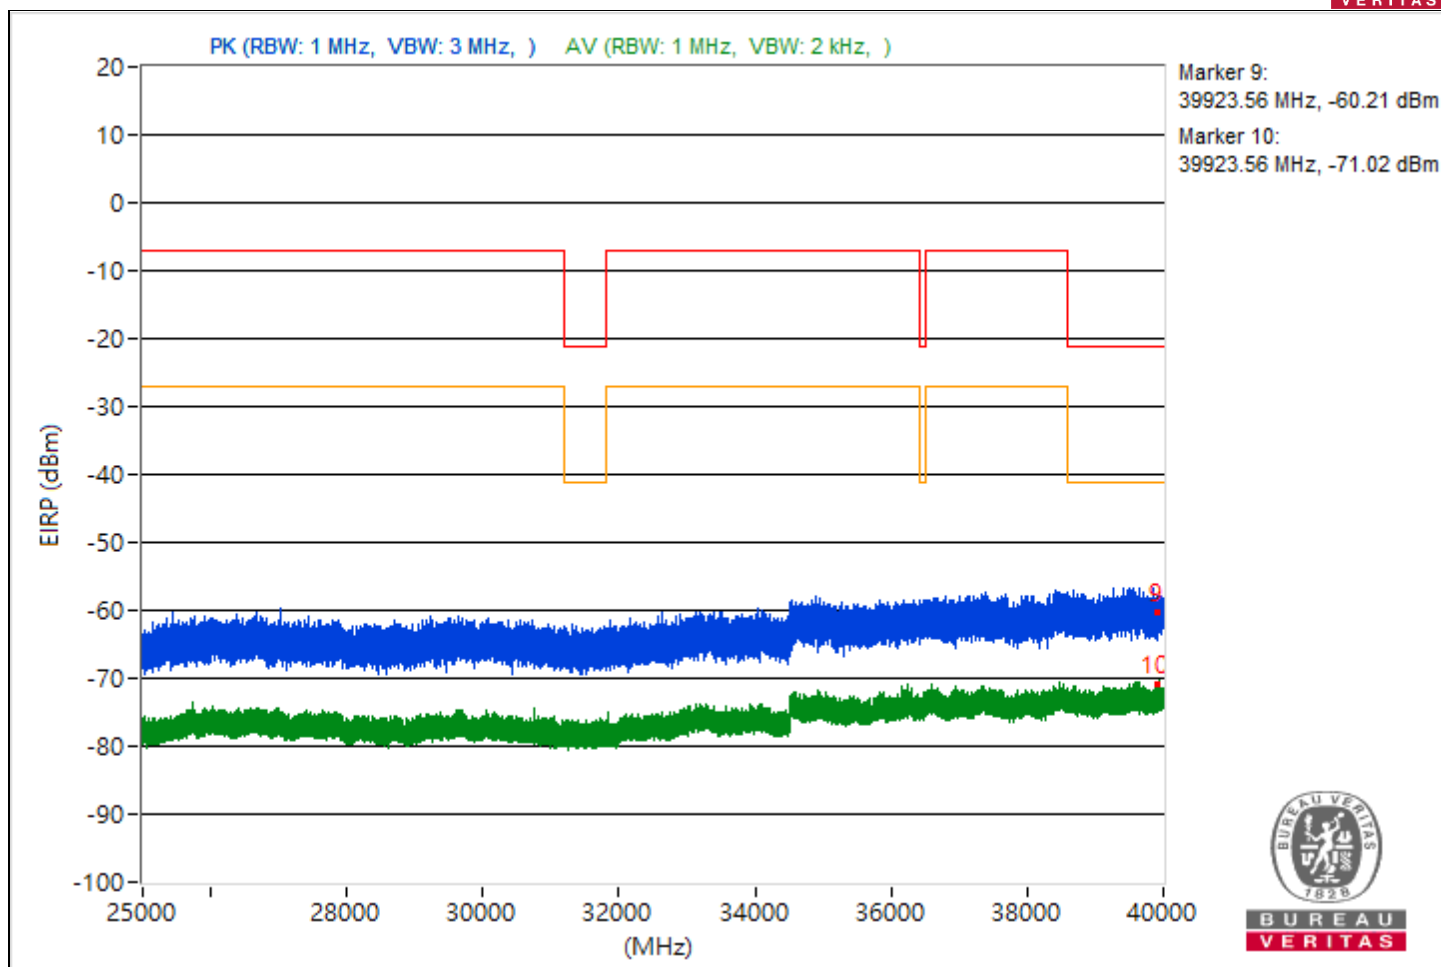


|                 |                                |                          |                   |
|-----------------|--------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 113 : 6515 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                 | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5402.84         | 37.56 PK                | 74             | -36.44      | -67.65                  | -71.23                  | 8.37                   | -57.7            |
| 2                            | 5402.84         | 28.23 AV                | 54             | -25.77      | -77.7                   | -79.26                  | 8.37                   | -67.03           |
| 3                            | 7274.02         | 38.71 PK                | 74             | -35.29      | -68.03                  | -67.84                  | 8.37                   | -56.55           |
| 4                            | 7274.02         | 28.27 AV                | 54             | -25.73      | -77.82                  | -79.01                  | 8.37                   | -66.99           |
| 5                            | 19203.1         | 38.18 PK                | 74             | -35.82      | -68.68                  | -68.26                  | 8.37                   | -57.08           |
| 6                            | 19203.1         | 27.84 AV                | 54             | -26.16      | -77.29                  | -81.14                  | 8.37                   | -67.42           |
| 7                            | 23797.7         | 39.07 PK                | 74             | -34.93      | -66.85                  | -68.42                  | 8.37                   | -56.19           |
| 8                            | 23797.7         | 29.59 AV                | 54             | -24.41      | -75.93                  | -78.54                  | 8.37                   | -65.67           |
| 9                            | 39689.87        | 32.71 PK                | 74             | -41.29      | -74.52                  | -73.41                  | 8.37                   | -62.55           |
| 10                           | 39689.87        | 24.34 AV                | 54             | -29.66      | -84.14                  | -81.02                  | 8.37                   | -70.92           |

Note: Margin value = Emission Level - Limit value

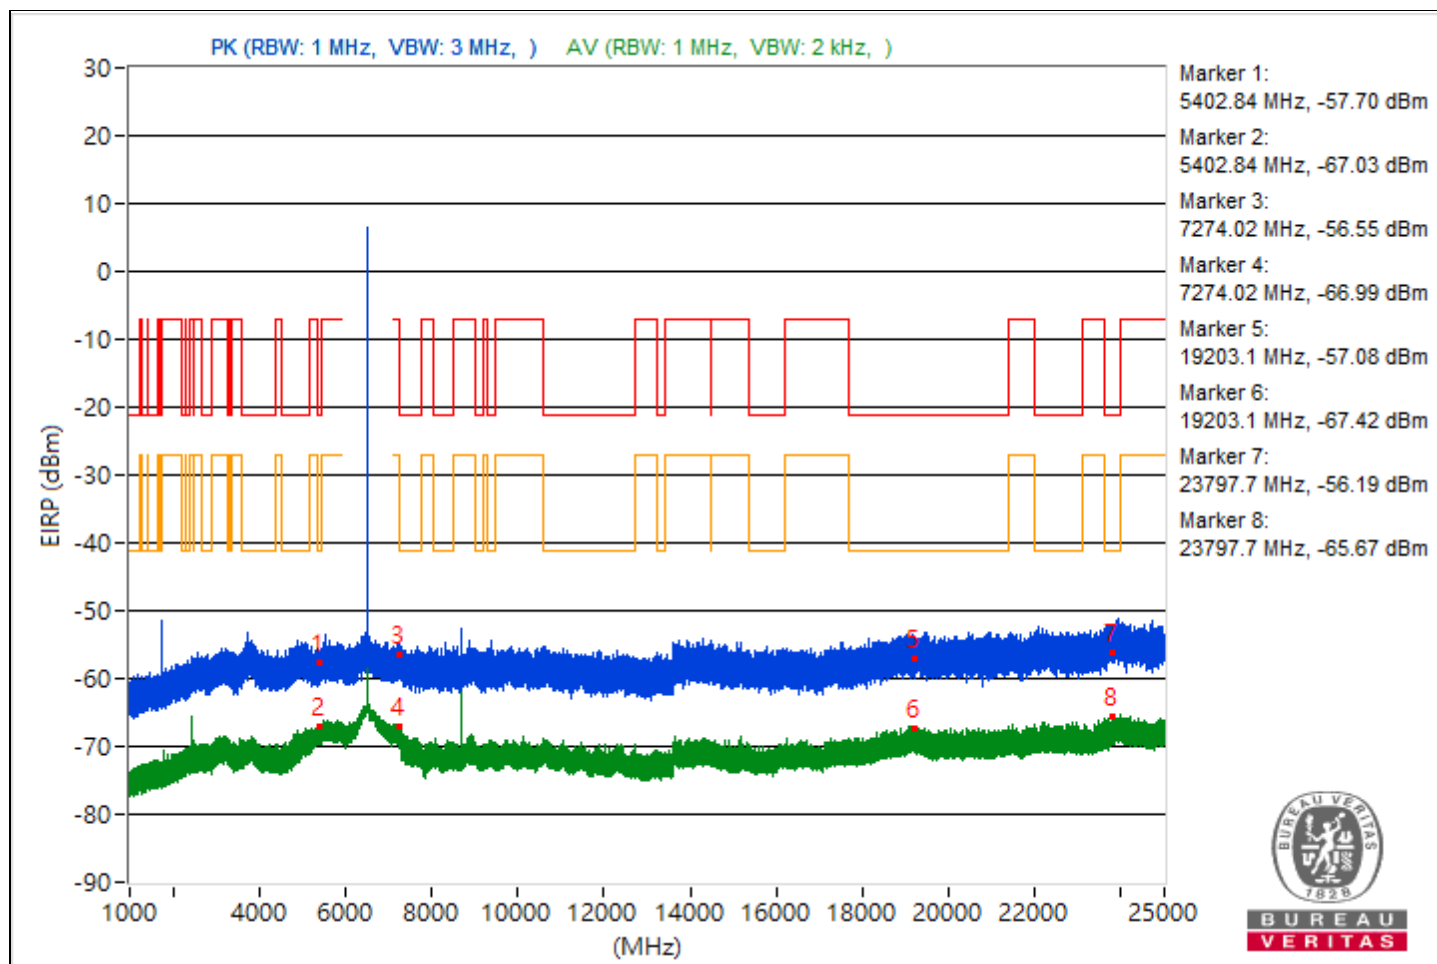


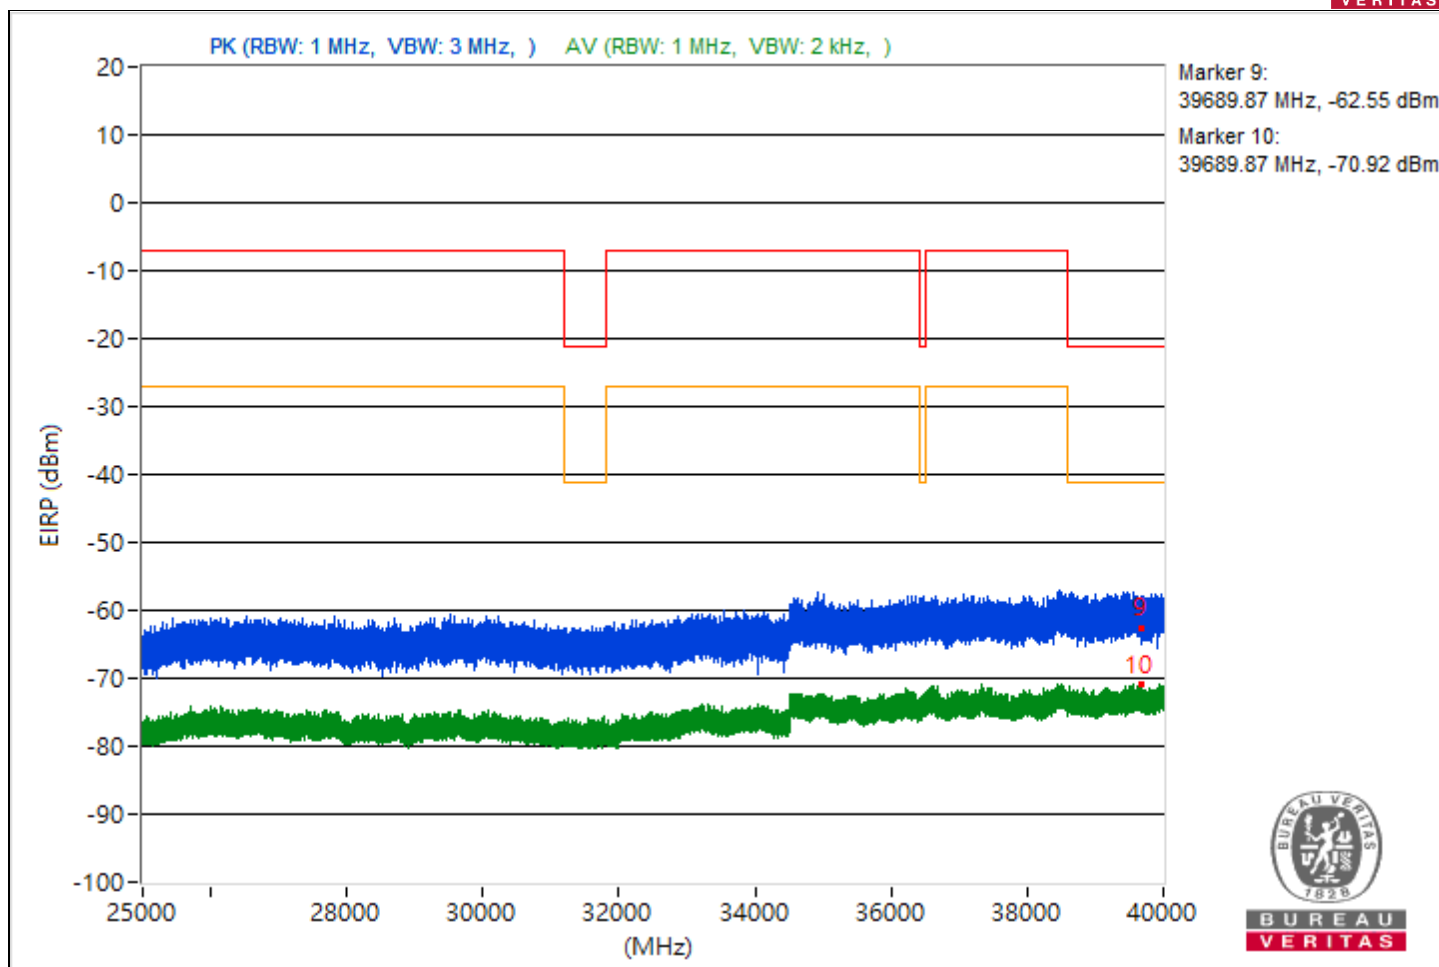


|                 |                                |                          |                   |
|-----------------|--------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                 | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5443.76         | 36.49 PK                | 74             | -37.51      | -69.8                   | -70.53                  | 8.37                   | -58.77           |
| 2                            | 5443.76         | 28.71 AV                | 54             | -25.29      | -77.48                  | -78.44                  | 8.37                   | -66.55           |
| 3                            | 7267.49         | 37.15 PK                | 74             | -36.85      | -69.58                  | -69.41                  | 8.37                   | -58.11           |
| 4                            | 7267.49         | 27.37 AV                | 54             | -26.63      | -80.08                  | -78.58                  | 8.37                   | -67.89           |
| 5                            | 21360.5         | 39.61 PK                | 74             | -34.39      | -65.65                  | -69.07                  | 8.37                   | -55.65           |
| 6                            | 21360.5         | 28.14 AV                | 54             | -25.86      | -77.33                  | -80.1                   | 8.37                   | -67.12           |
| 7                            | 23931           | 40.2 PK                 | 74             | -33.8       | -66.09                  | -66.83                  | 8.37                   | -55.06           |
| 8                            | 23931           | 29.38 AV                | 54             | -24.62      | -79.8                   | -75.67                  | 8.37                   | -65.88           |
| 9                            | 39559.47        | 34.16 PK                | 74             | -39.84      | -71.56                  | -73.65                  | 8.37                   | -61.1            |
| 10                           | 39559.47        | 24.4 AV                 | 54             | -29.6       | -81.31                  | -83.42                  | 8.37                   | -70.86           |

Note: Margin value = Emission Level - Limit value

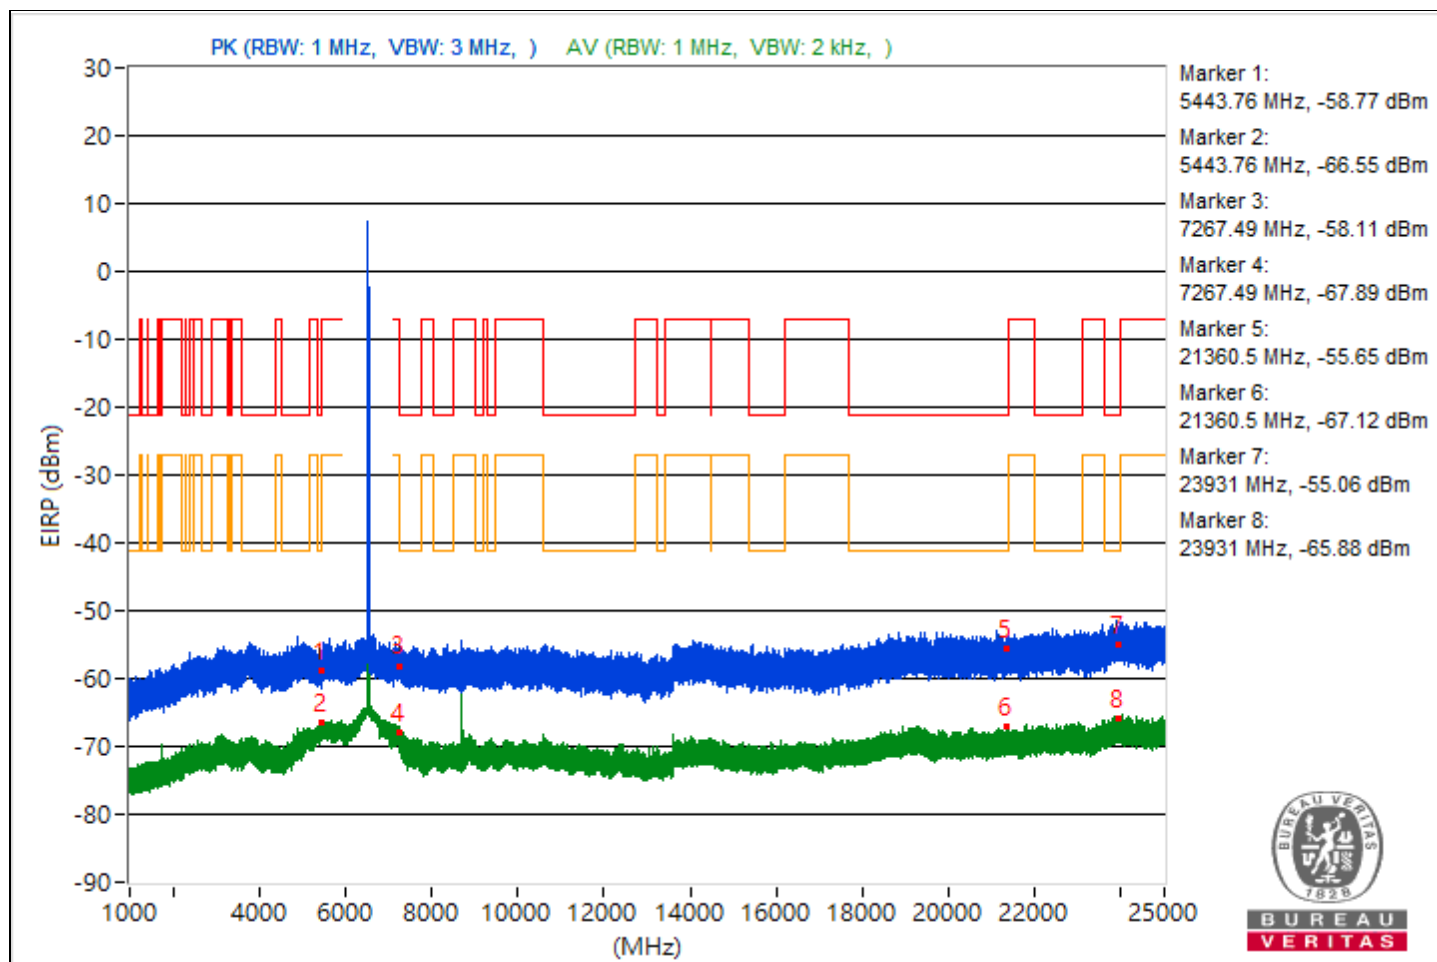


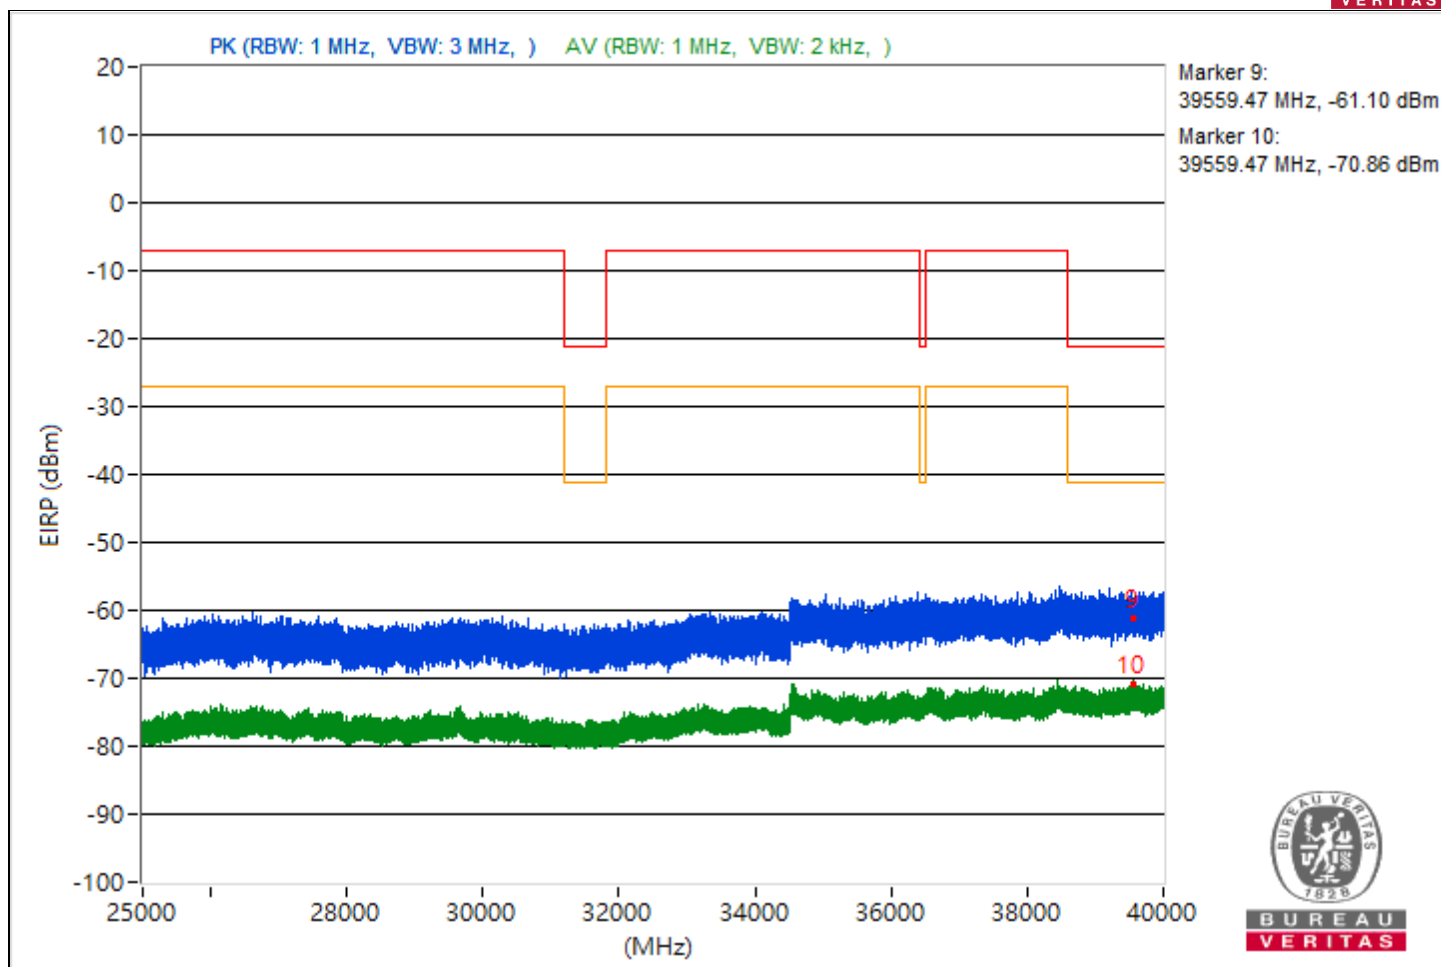


|                 |                                |                          |                   |
|-----------------|--------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                 | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5412.33         | 36.09 PK                | 74             | -37.91      | -70.81                  | -70.31                  | 8.37                   | -59.17           |
| 2                            | 5412.33         | 28.72 AV                | 54             | -25.28      | -78.62                  | -77.31                  | 8.37                   | -66.54           |
| 3                            | 9166.76         | 38.96 PK                | 74             | -35.04      | -67.62                  | -67.74                  | 8.37                   | -56.3            |
| 4                            | 9166.76         | 34.73 AV                | 54             | -19.27      | -69.38                  | -78.71                  | 8.37                   | -60.53           |
| 5                            | 21274.5         | 38.38 PK                | 74             | -35.62      | -67.82                  | -68.75                  | 8.37                   | -56.88           |
| 6                            | 21274.5         | 27.75 AV                | 54             | -26.25      | -81.11                  | -77.43                  | 8.37                   | -67.51           |
| 7                            | 23856.4         | 39.99 PK                | 74             | -34.01      | -66.87                  | -66.44                  | 8.37                   | -55.27           |
| 8                            | 23856.4         | 30.47 AV                | 54             | -23.53      | -75.21                  | -77.4                   | 8.37                   | -64.79           |
| 9                            | 39693.42        | 35.6 PK                 | 74             | -38.4       | -71.11                  | -70.97                  | 8.37                   | -59.66           |
| 10                           | 39693.42        | 24.29 AV                | 54             | -29.71      | -80.71                  | -85.02                  | 8.37                   | -70.97           |

Note: Margin value = Emission Level - Limit value

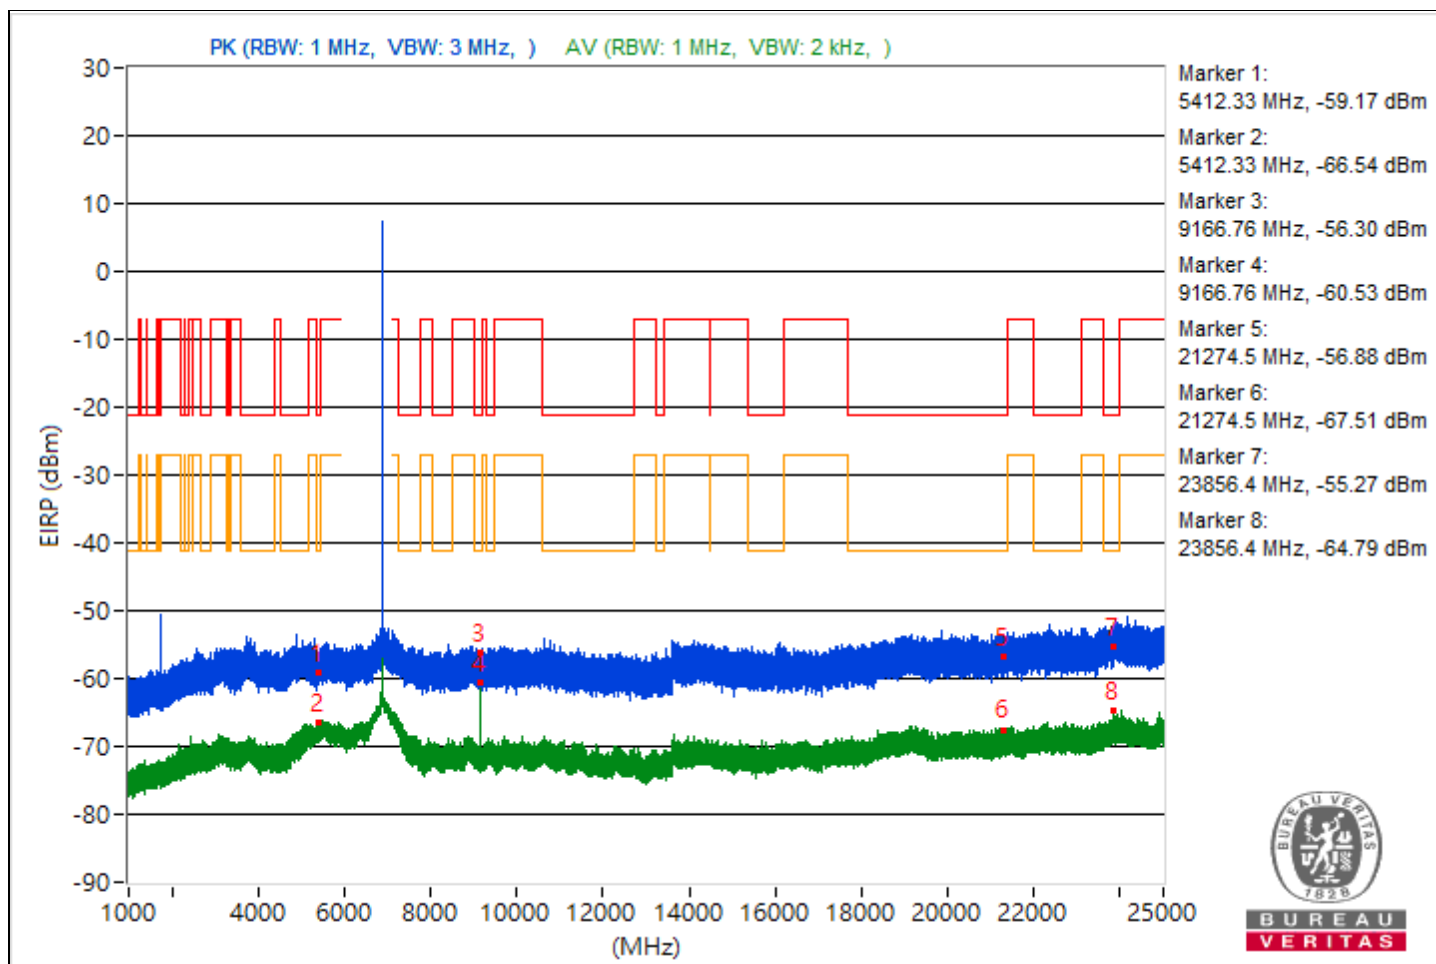


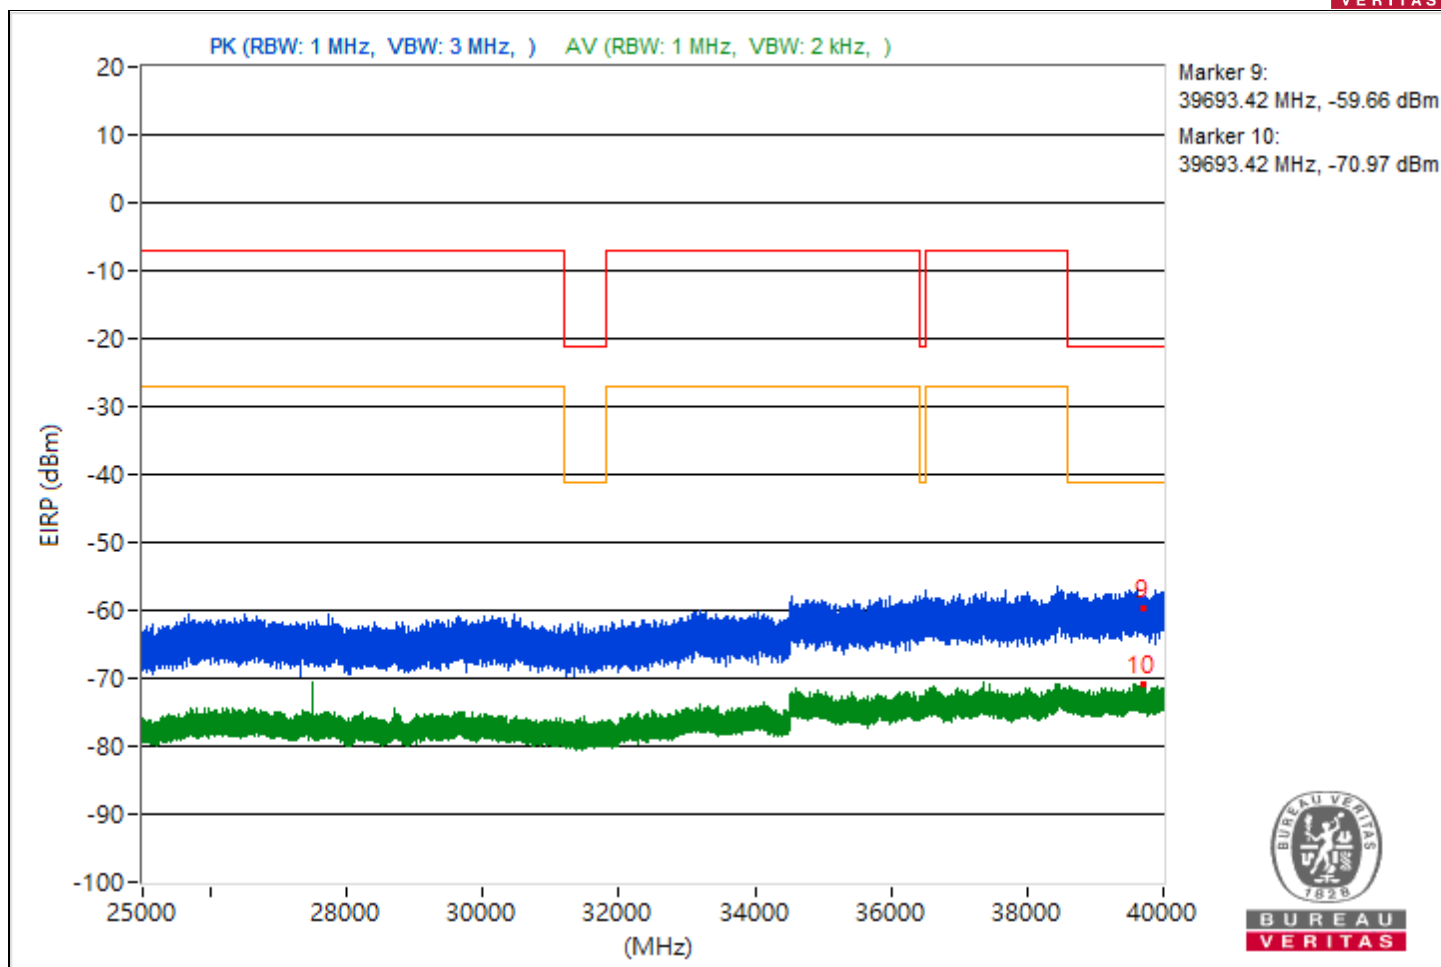


|                 |                                |                          |                   |
|-----------------|--------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                 | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5407.98         | 35.83 PK                | 74             | -38.17      | -71.36                  | -70.32                  | 8.37                   | -59.43           |
| 2                            | 5407.98         | 28.46 AV                | 54             | -25.54      | -79.35                  | -77.26                  | 8.37                   | -66.8            |
| 3                            | 9326.22         | 40.35 PK                | 74             | -33.65      | -65.49                  | -67.28                  | 8.37                   | -54.91           |
| 4                            | 9326.22         | 32.1 AV                 | 54             | -21.9       | -71.94                  | -81.97                  | 8.37                   | -63.16           |
| 5                            | 19202.4         | 37.93 PK                | 74             | -36.07      | -68.56                  | -68.86                  | 8.37                   | -57.33           |
| 6                            | 19202.4         | 27.86 AV                | 54             | -26.14      | -81.29                  | -77.2                   | 8.37                   | -67.4            |
| 7                            | 23933.2         | 40.55 PK                | 74             | -33.45      | -67.64                  | -64.95                  | 8.37                   | -54.71           |
| 8                            | 23933.2         | 29.4 AV                 | 54             | -24.6       | -79.7                   | -75.68                  | 8.37                   | -65.86           |
| 9                            | 39493.24        | 35.17 PK                | 74             | -38.83      | -70.26                  | -73.16                  | 8.37                   | -60.09           |
| 10                           | 39493.24        | 24.04 AV                | 54             | -29.96      | -85.04                  | -81.04                  | 8.37                   | -71.22           |

Note: Margin value = Emission Level - Limit value

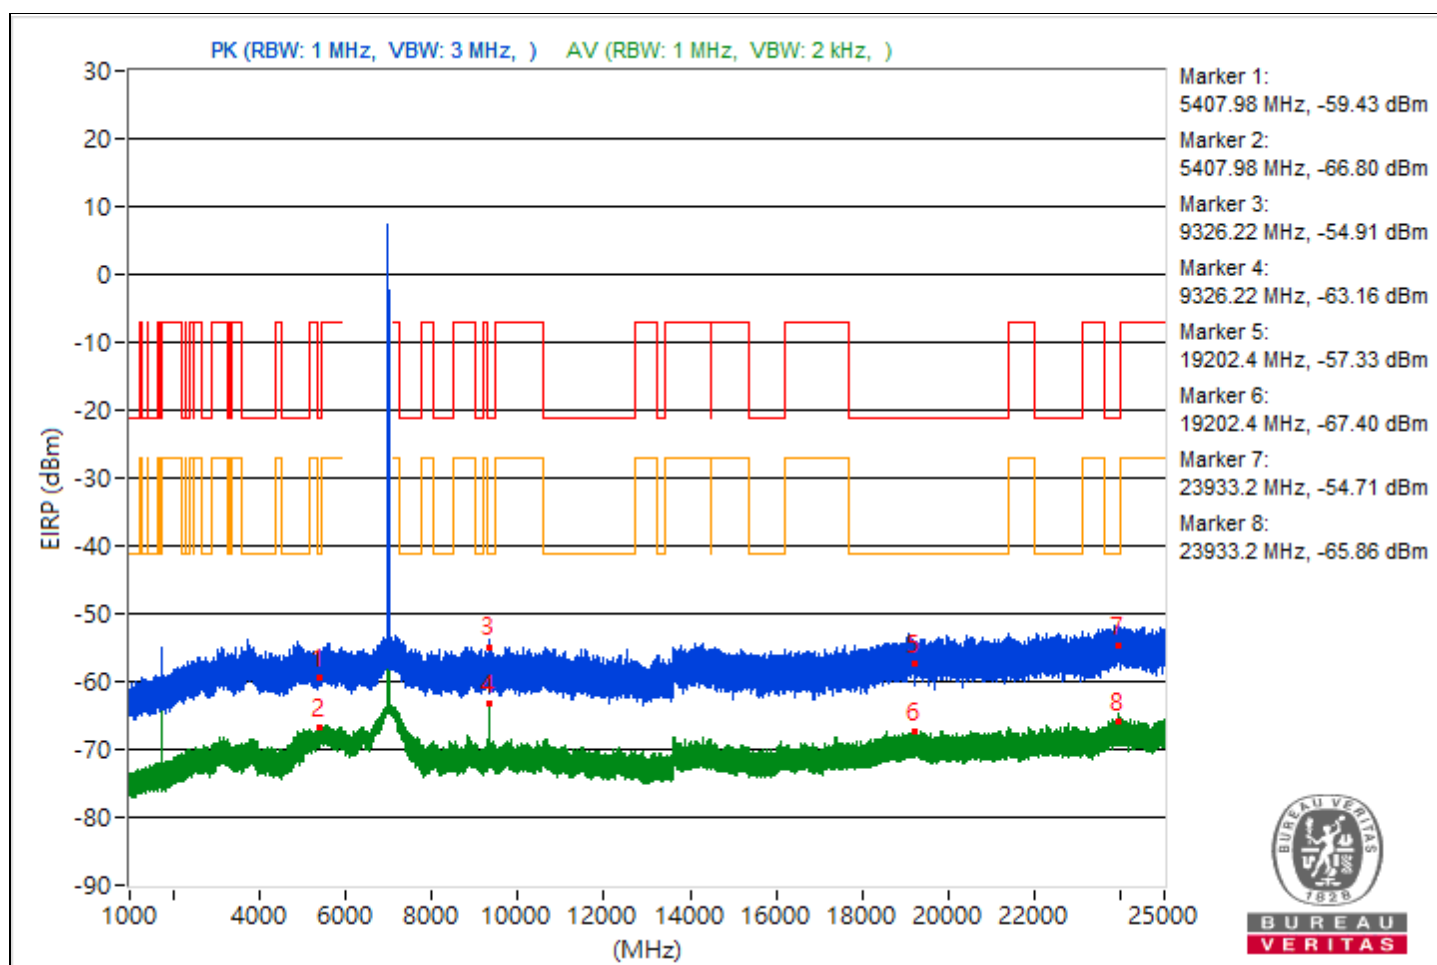


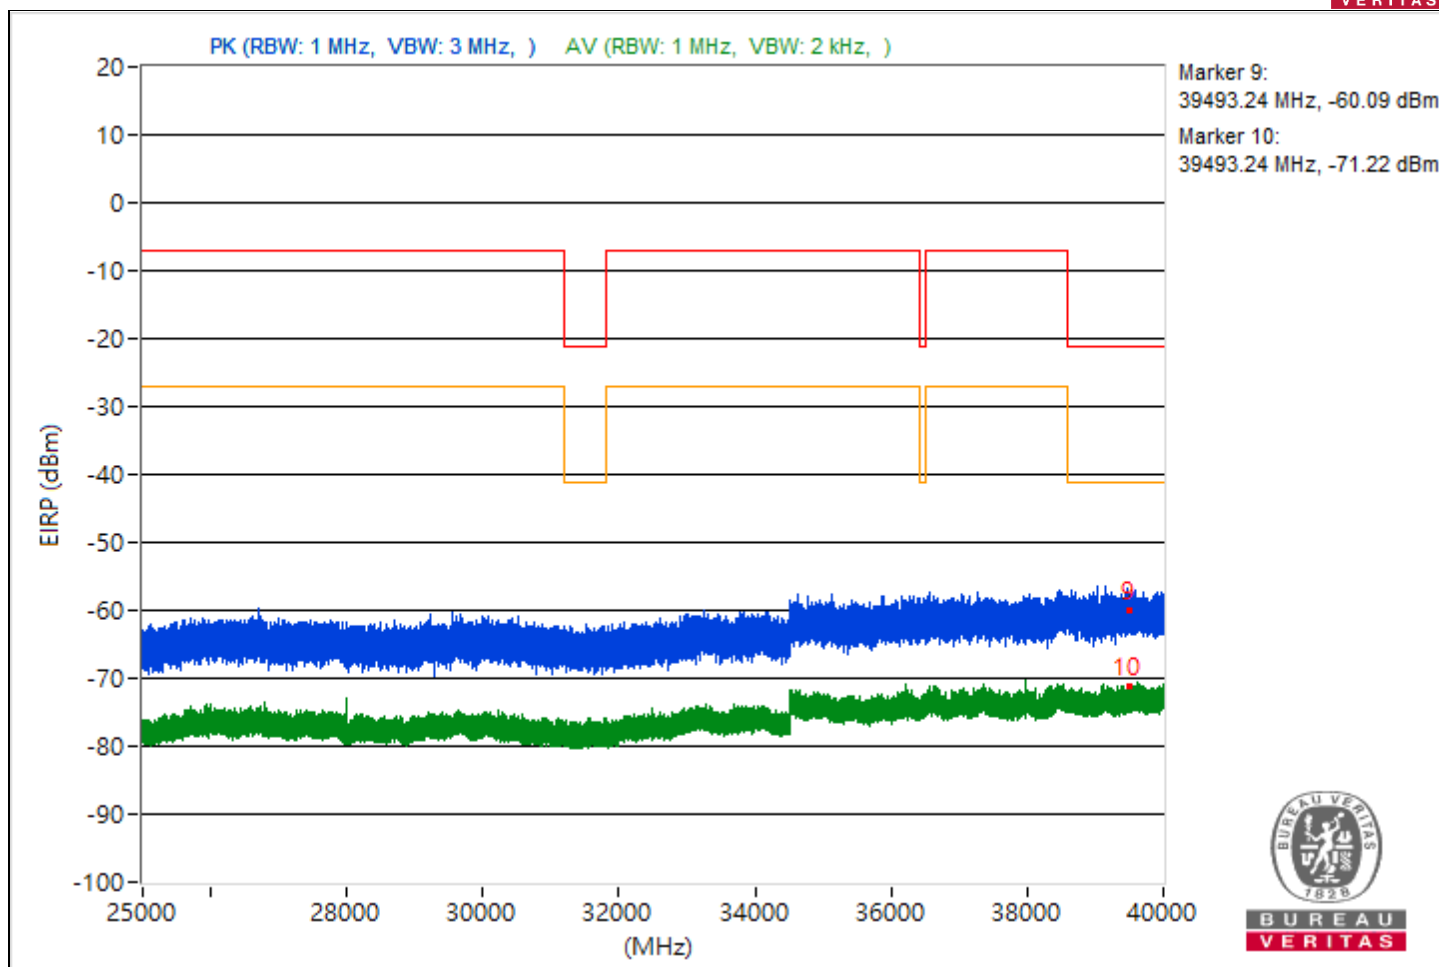


|                 |                                |                          |                   |
|-----------------|--------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                 | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5452.54         | 36.01 PK                | 74             | -37.99      | -71.9                   | -69.66                  | 8.37                   | -59.25           |
| 2                            | 5452.54         | 27.12 AV                | 54             | -26.88      | -84.18                  | -77.32                  | 8.37                   | -68.14           |
| 3                            | 9166.76         | 43.68 PK                | 74             | -30.32      | -60.29                  | -71.16                  | 8.37                   | -51.58           |
| 4                            | 9166.76         | 41.29 AV                | 54             | -12.71      | -62.37                  | -83.81                  | 8.37                   | -53.97           |
| 5                            | 20154.9         | 38.02 PK                | 74             | -35.98      | -69.05                  | -68.23                  | 8.37                   | -57.24           |
| 6                            | 20154.9         | 28.22 AV                | 54             | -25.78      | -76.82                  | -80.99                  | 8.37                   | -67.04           |
| 7                            | 23927.1         | 40.34 PK                | 74             | -33.66      | -67.04                  | -65.68                  | 8.37                   | -54.92           |
| 8                            | 23927.1         | 29.88 AV                | 54             | -24.12      | -75.78                  | -78.03                  | 8.37                   | -65.38           |
| 9                            | 39705.69        | 35.27 PK                | 74             | -38.73      | -70.86                  | -71.96                  | 8.37                   | -59.99           |
| 10                           | 39705.69        | 24 AV                   | 54             | -30         | -80.96                  | -85.42                  | 8.37                   | -71.26           |

Note: Margin value = Emission Level - Limit value

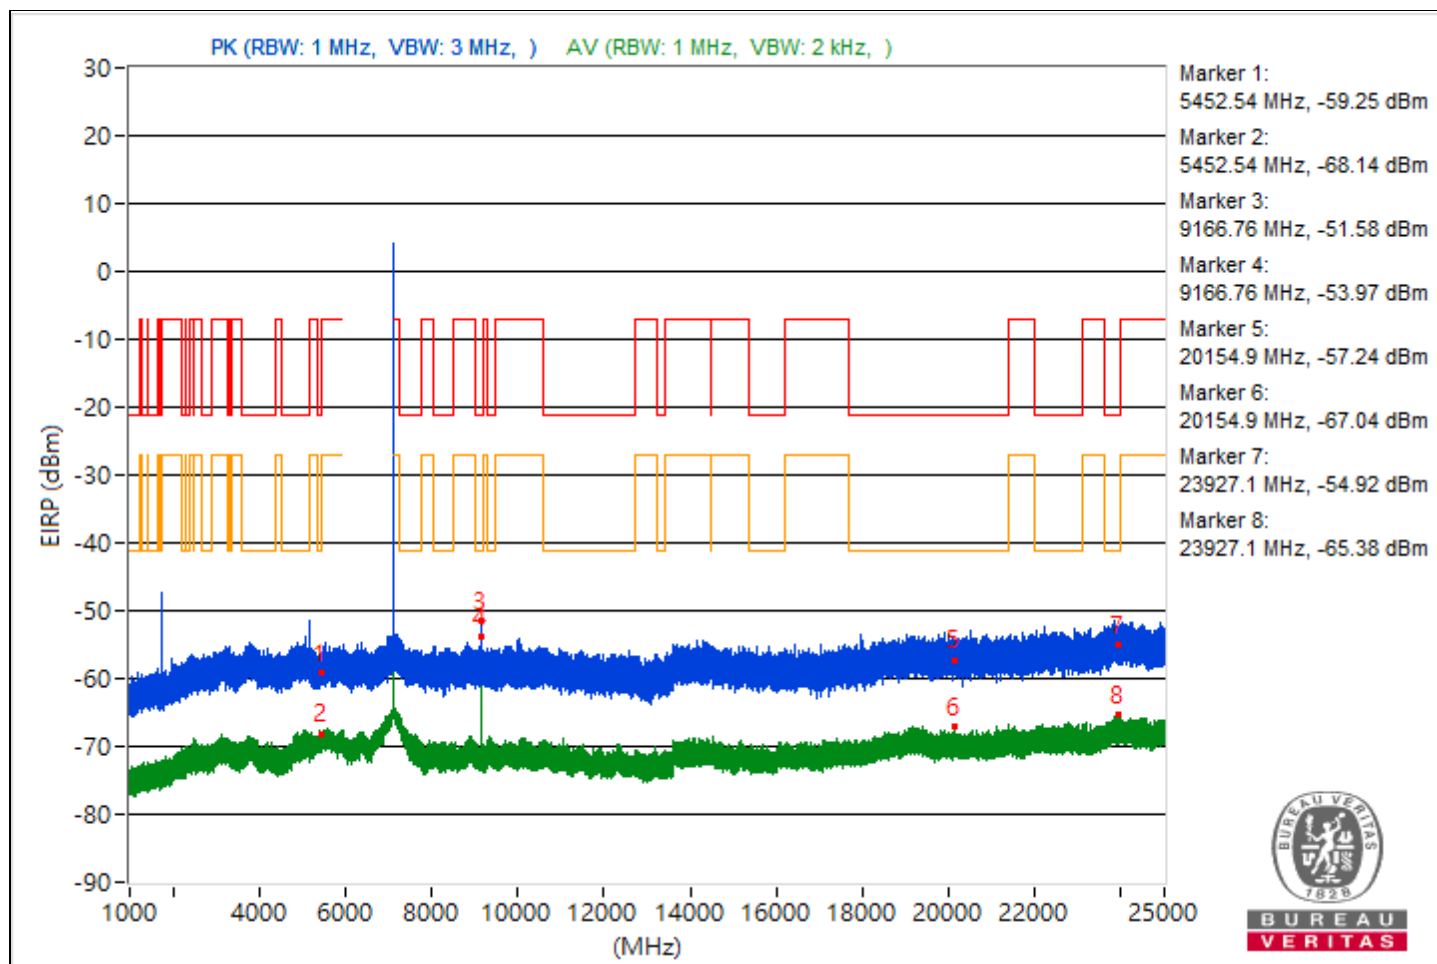


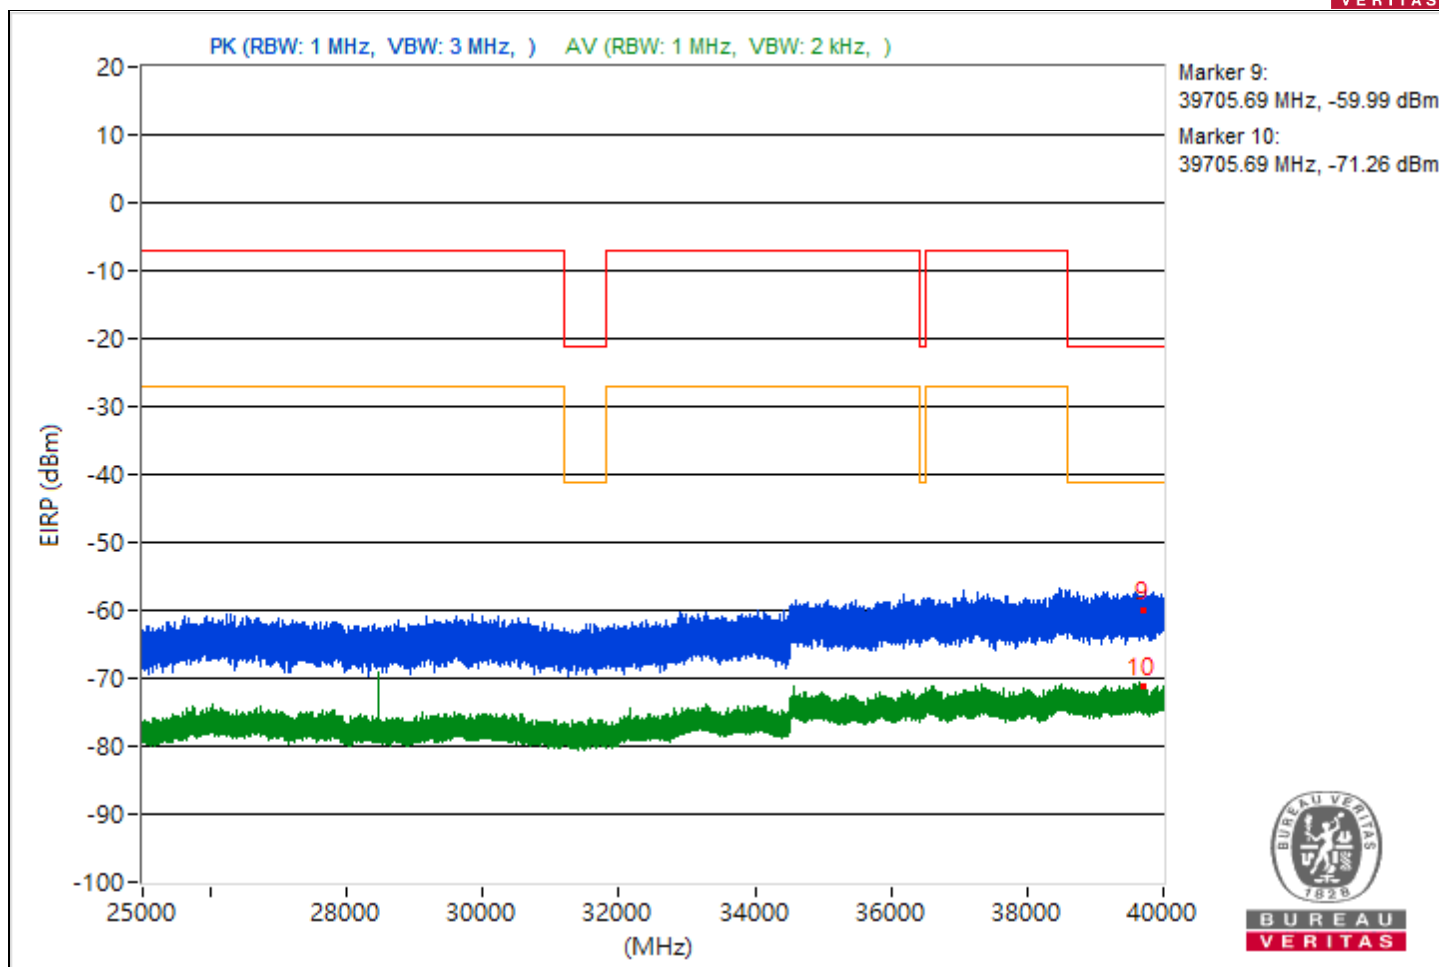


|                 |                                 |                          |                 |
|-----------------|---------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                     |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5455.58         | 37.29 PK                | 74             | -36.71      | -69.35                  | -69.35                  | 8.37                   | -57.97           |
| 2                            | 5455.58         | 29.55 AV                | 54             | -24.45      | -77.09                  | -77.09                  | 8.37                   | -65.71           |
| 3                            | 7282.58         | 35.27 PK                | 74             | -38.73      | -71.37                  | -71.37                  | 8.37                   | -59.99           |
| 4                            | 7282.58         | 27.1 AV                 | 54             | -26.9       | -79.54                  | -79.54                  | 8.37                   | -68.16           |
| 5                            | 20629.2         | 38.62 PK                | 74             | -35.38      | -68.02                  | -68.02                  | 8.37                   | -56.64           |
| 6                            | 20629.2         | 28.95 AV                | 54             | -25.05      | -77.69                  | -77.69                  | 8.37                   | -66.31           |
| 7                            | 23949.5         | 40.21 PK                | 74             | -33.79      | -66.43                  | -66.43                  | 8.37                   | -55.05           |
| 8                            | 23949.5         | 30.21 AV                | 54             | -23.79      | -76.43                  | -76.43                  | 8.37                   | -65.05           |
| 9                            | 39081.87        | 34.97 PK                | 74             | -39.03      | -71.67                  | -71.67                  | 8.37                   | -60.29           |
| 10                           | 39081.87        | 25.17 AV                | 54             | -28.83      | -81.47                  | -81.47                  | 8.37                   | -70.09           |

Note: Margin value = Emission Level - Limit value

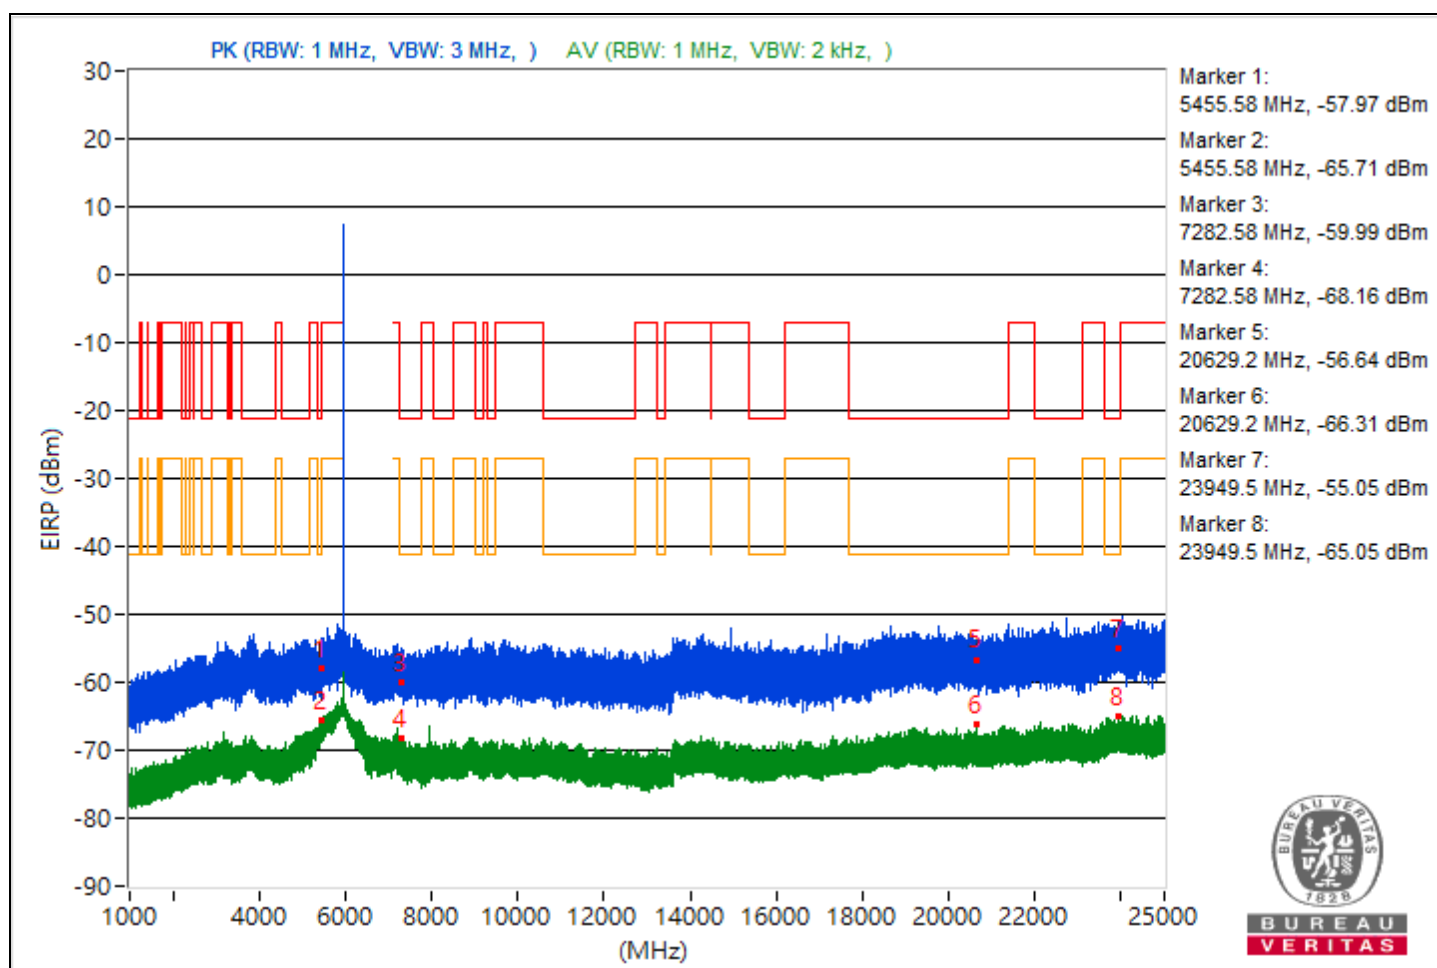


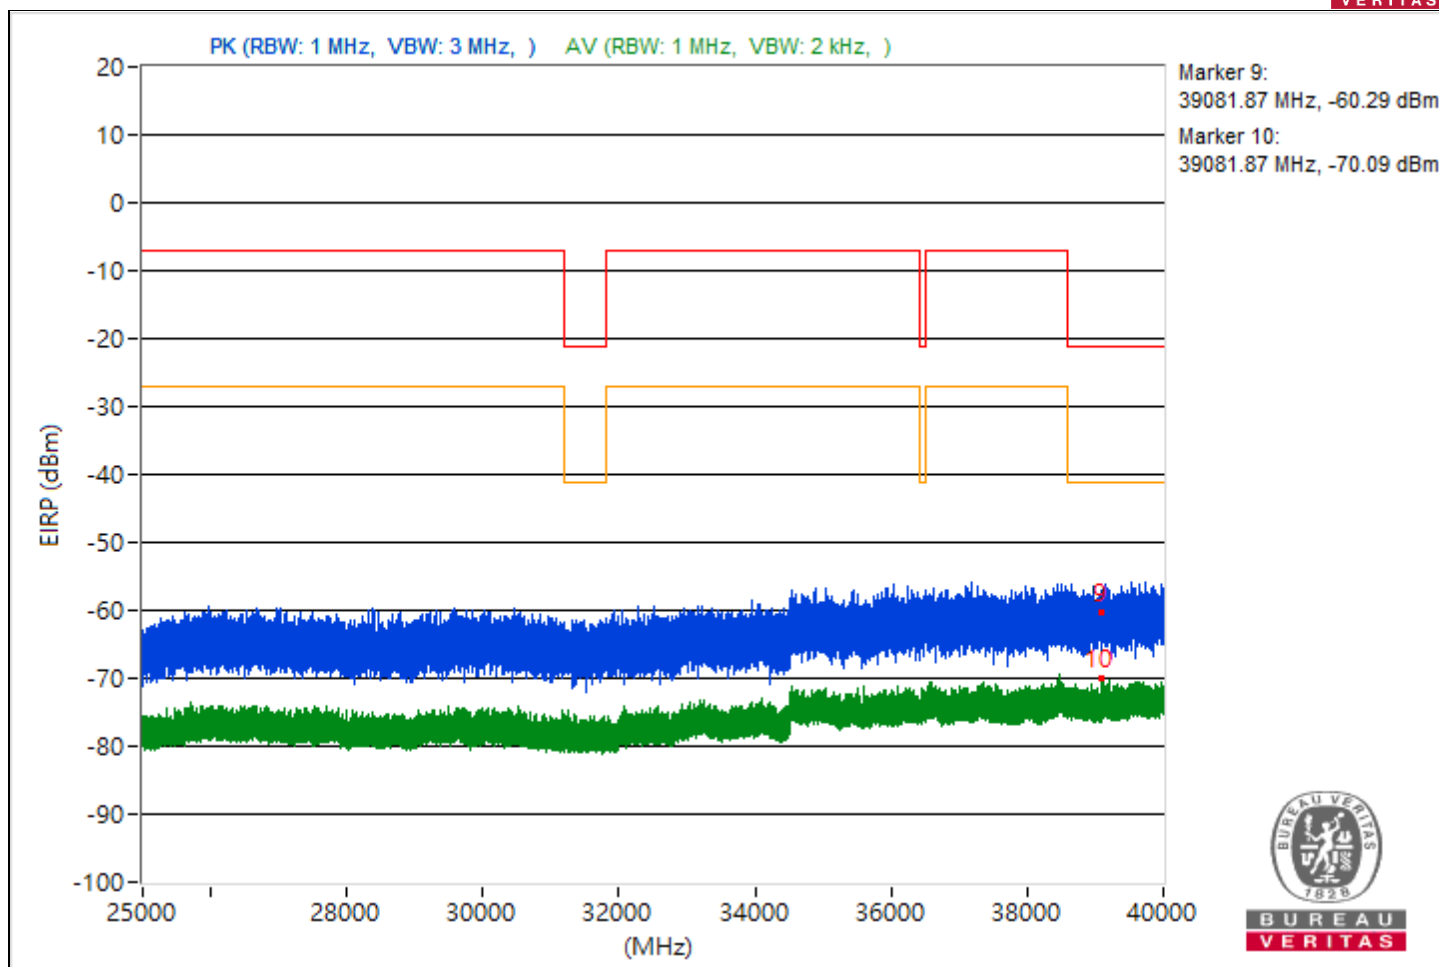


|                 |                                 |                          |                  |
|-----------------|---------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                     |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5436.13         | 37.24 PK                | 74             | -36.76      | -70.81                  | -68.34                  | 8.37                   | -58.02           |
| 2                            | 5436.13         | 27.42 AV                | 54             | -26.58      | -78.32                  | -80.35                  | 8.37                   | -67.84           |
| 3                            | 7264.07         | 36.26 PK                | 74             | -37.74      | -70.1                   | -70.68                  | 8.37                   | -59              |
| 4                            | 7264.07         | 25.87 AV                | 54             | -28.13      | -79.14                  | -83.4                   | 8.37                   | -69.39           |
| 5                            | 21248.4         | 37.89 PK                | 74             | -36.11      | -68.42                  | -69.1                   | 8.37                   | -57.37           |
| 6                            | 21248.4         | 27.9 AV                 | 54             | -26.1       | -80.55                  | -77.47                  | 8.37                   | -67.36           |
| 7                            | 23968.2         | 40.25 PK                | 74             | -33.75      | -66.75                  | -66.06                  | 8.37                   | -55.01           |
| 8                            | 23968.2         | 29.75 AV                | 54             | -24.25      | -74.9                   | -80.7                   | 8.37                   | -65.51           |
| 9                            | 39428.36        | 35.28 PK                | 74             | -38.72      | -70.42                  | -72.57                  | 8.37                   | -59.98           |
| 10                           | 39428.36        | 24.13 AV                | 54             | -29.87      | -80.77                  | -85.47                  | 8.37                   | -71.13           |

Note: Margin value = Emission Level - Limit value

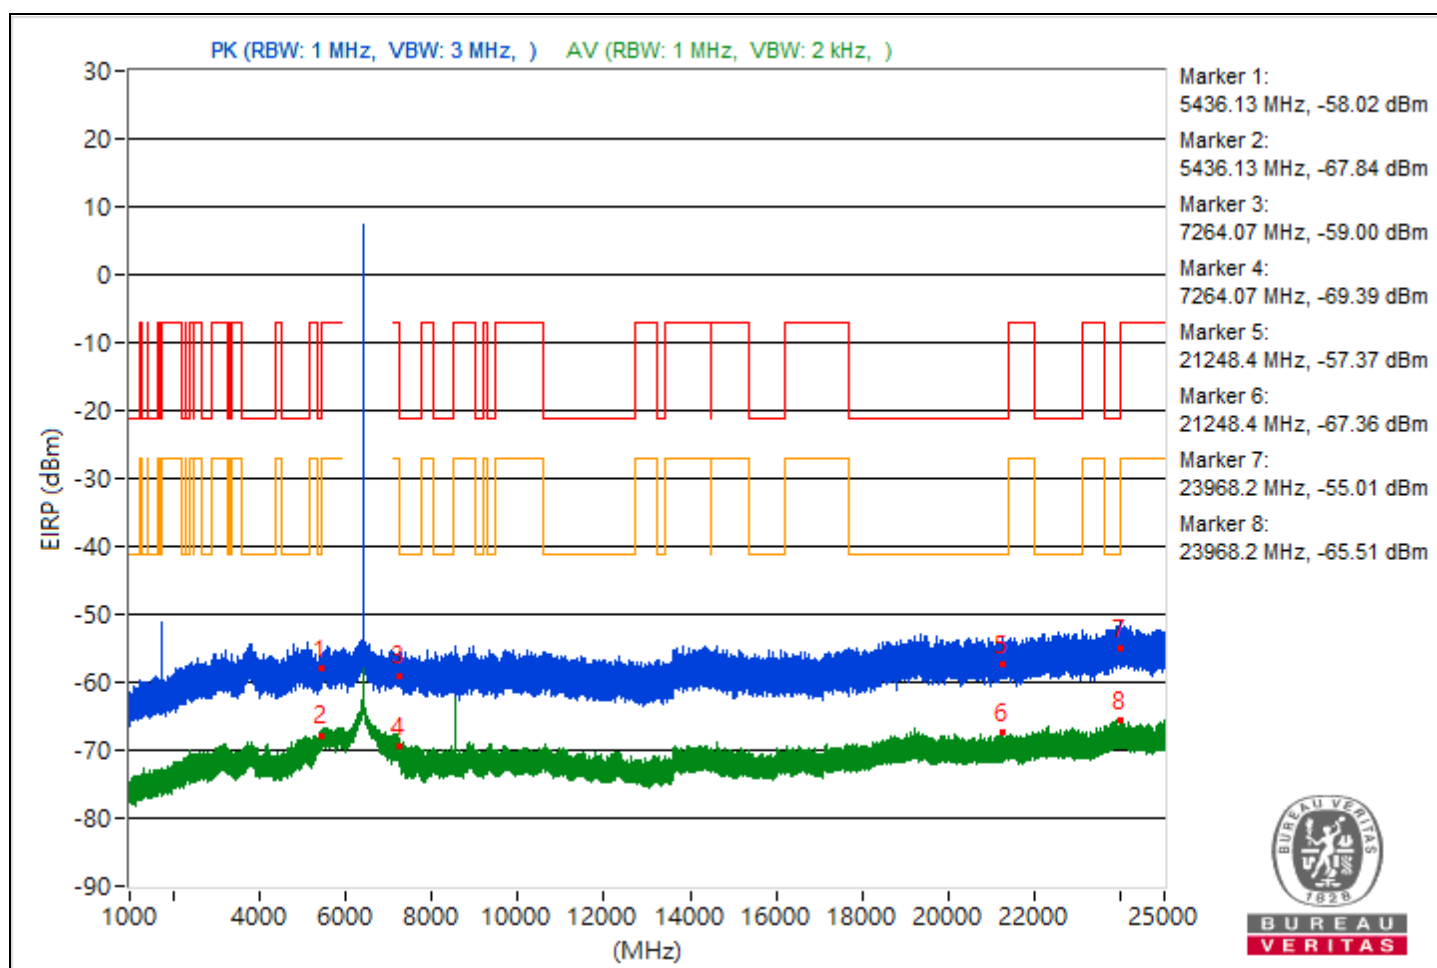


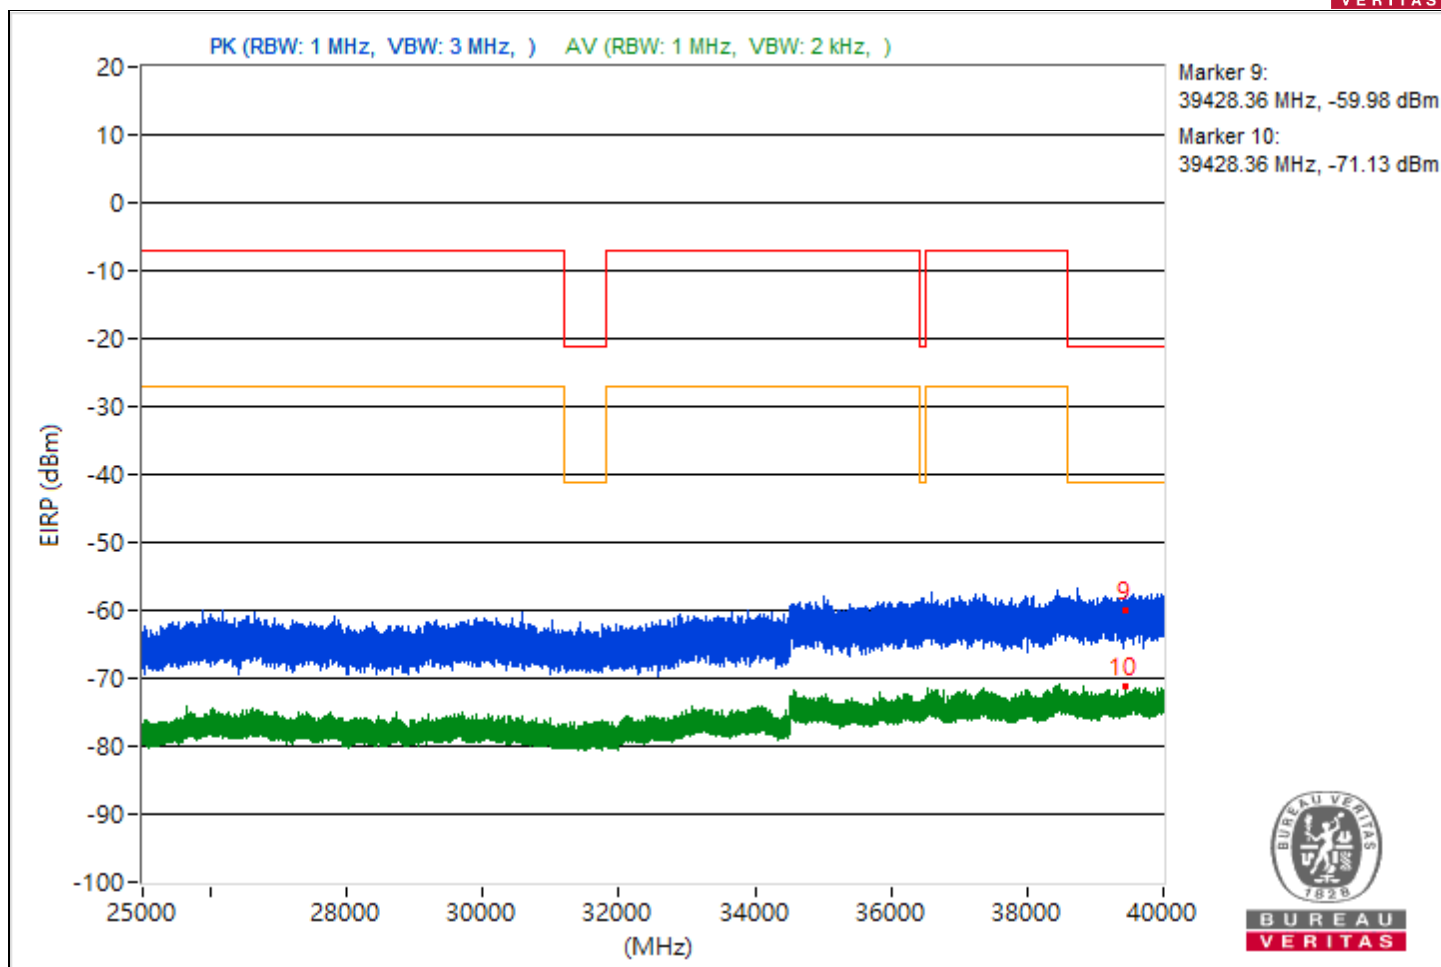


|                 |                                 |                          |                  |
|-----------------|---------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 97 : 6435 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                     |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5453.4          | 38 PK                   | 74             | -36         | -68.64                  | -68.64                  | 8.37                   | -57.26           |
| 2                            | 5453.4          | 28.65 AV                | 54             | -25.35      | -77.99                  | -77.99                  | 8.37                   | -66.61           |
| 3                            | 7256.6          | 37.72 PK                | 74             | -36.28      | -68.92                  | -68.92                  | 8.37                   | -57.54           |
| 4                            | 7256.6          | 28.22 AV                | 54             | -25.78      | -78.42                  | -78.42                  | 8.37                   | -67.04           |
| 5                            | 19859.5         | 40.68 PK                | 74             | -33.32      | -65.96                  | -65.96                  | 8.37                   | -54.58           |
| 6                            | 19859.5         | 28.86 AV                | 54             | -25.14      | -77.78                  | -77.78                  | 8.37                   | -66.4            |
| 7                            | 23995.4         | 39.35 PK                | 74             | -34.65      | -67.29                  | -67.29                  | 8.37                   | -55.91           |
| 8                            | 23995.4         | 30.03 AV                | 54             | -23.97      | -76.61                  | -76.61                  | 8.37                   | -65.23           |
| 9                            | 39976.8         | 34.09 PK                | 74             | -39.91      | -72.55                  | -72.55                  | 8.37                   | -61.17           |
| 10                           | 39976.8         | 25.21 AV                | 54             | -28.79      | -81.43                  | -81.43                  | 8.37                   | -70.05           |

Note: Margin value = Emission Level - Limit value

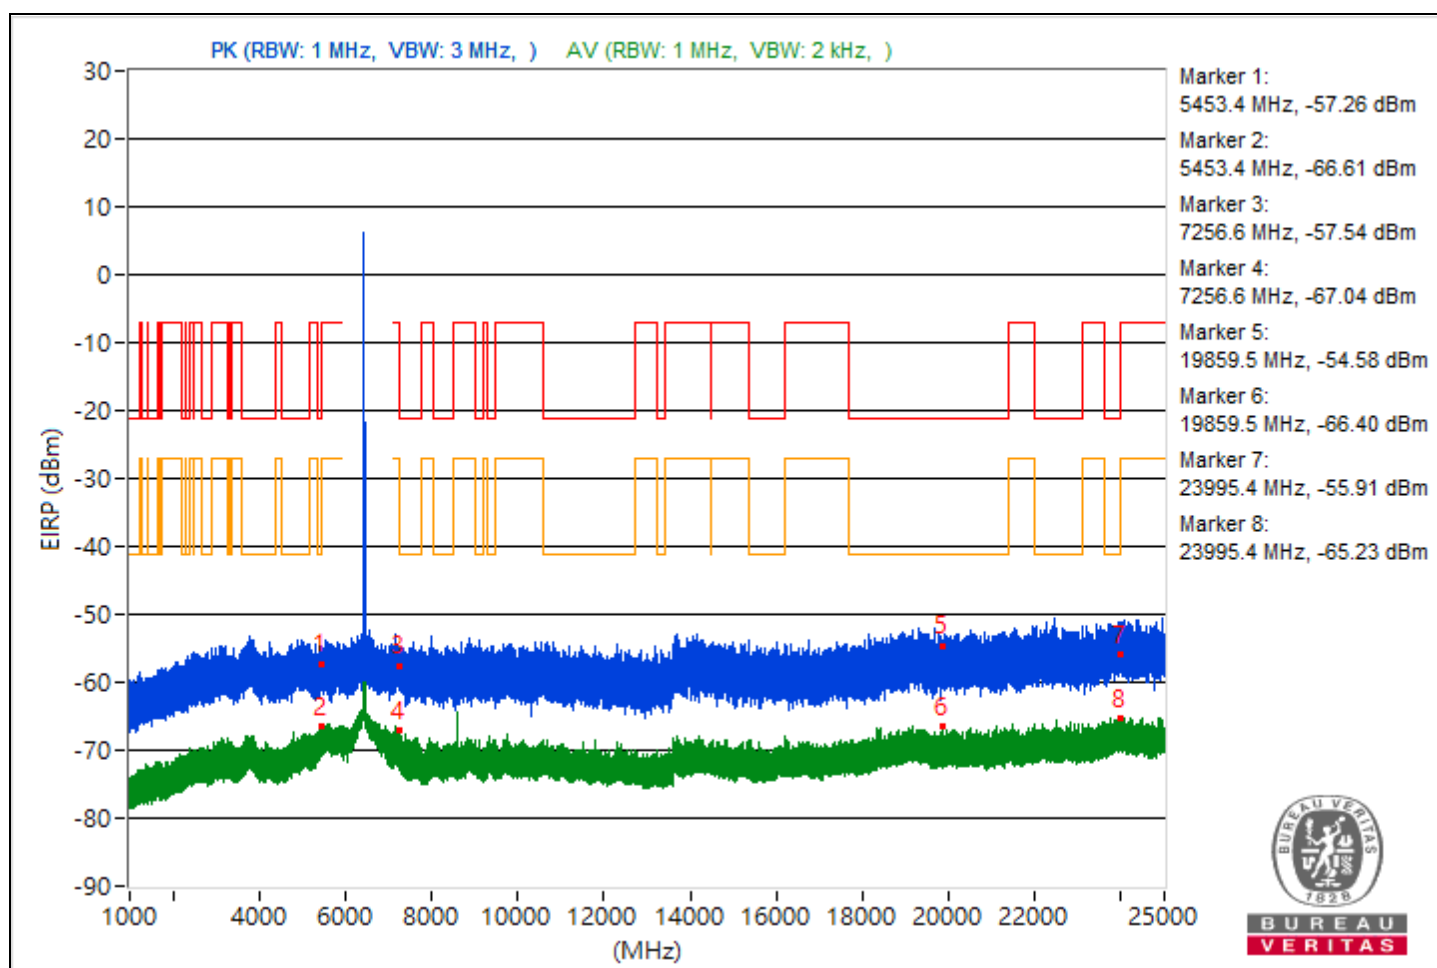


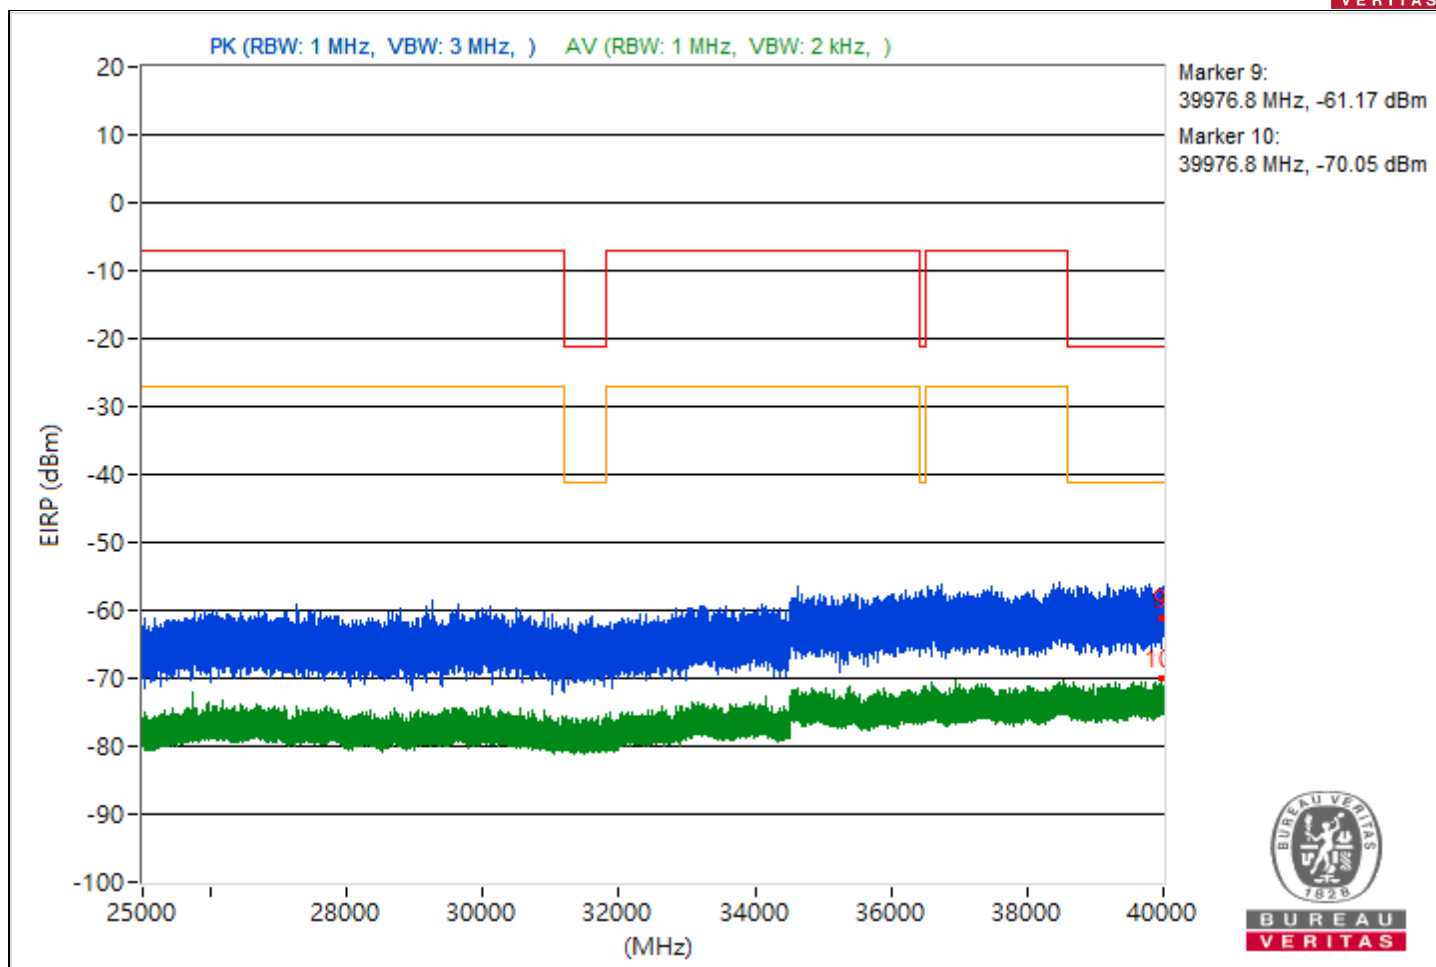


|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 113 : 6515 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                     |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5451.3          | 37.07 PK                | 74             | -36.93      | -68.51                  | -70.97                  | 8.37                   | -58.19           |
| 2                            | 5451.3          | 28.84 AV                | 54             | -25.16      | -76.85                  | -79.01                  | 8.37                   | -66.42           |
| 3                            | 7265.93         | 37.59 PK                | 74             | -36.41      | -68.45                  | -69.75                  | 8.37                   | -57.67           |
| 4                            | 7265.93         | 28.22 AV                | 54             | -25.78      | -78.67                  | -78.18                  | 8.37                   | -67.04           |
| 5                            | 21125.8         | 37.7 PK                 | 74             | -36.3       | -68.61                  | -69.29                  | 8.37                   | -57.56           |
| 6                            | 21125.8         | 27.86 AV                | 54             | -26.14      | -80.83                  | -77.39                  | 8.37                   | -67.4            |
| 7                            | 23960.4         | 41.08 PK                | 74             | -32.92      | -65.18                  | -65.97                  | 8.37                   | -54.18           |
| 8                            | 23960.4         | 29.4 AV                 | 54             | -24.6       | -76.04                  | -78.88                  | 8.37                   | -65.86           |
| 9                            | 39938.84        | 35.56 PK                | 74             | -38.44      | -70.02                  | -72.47                  | 8.37                   | -59.7            |
| 10                           | 39938.84        | 23.97 AV                | 54             | -30.03      | -81.79                  | -83.79                  | 8.37                   | -71.29           |

Note: Margin value = Emission Level - Limit value

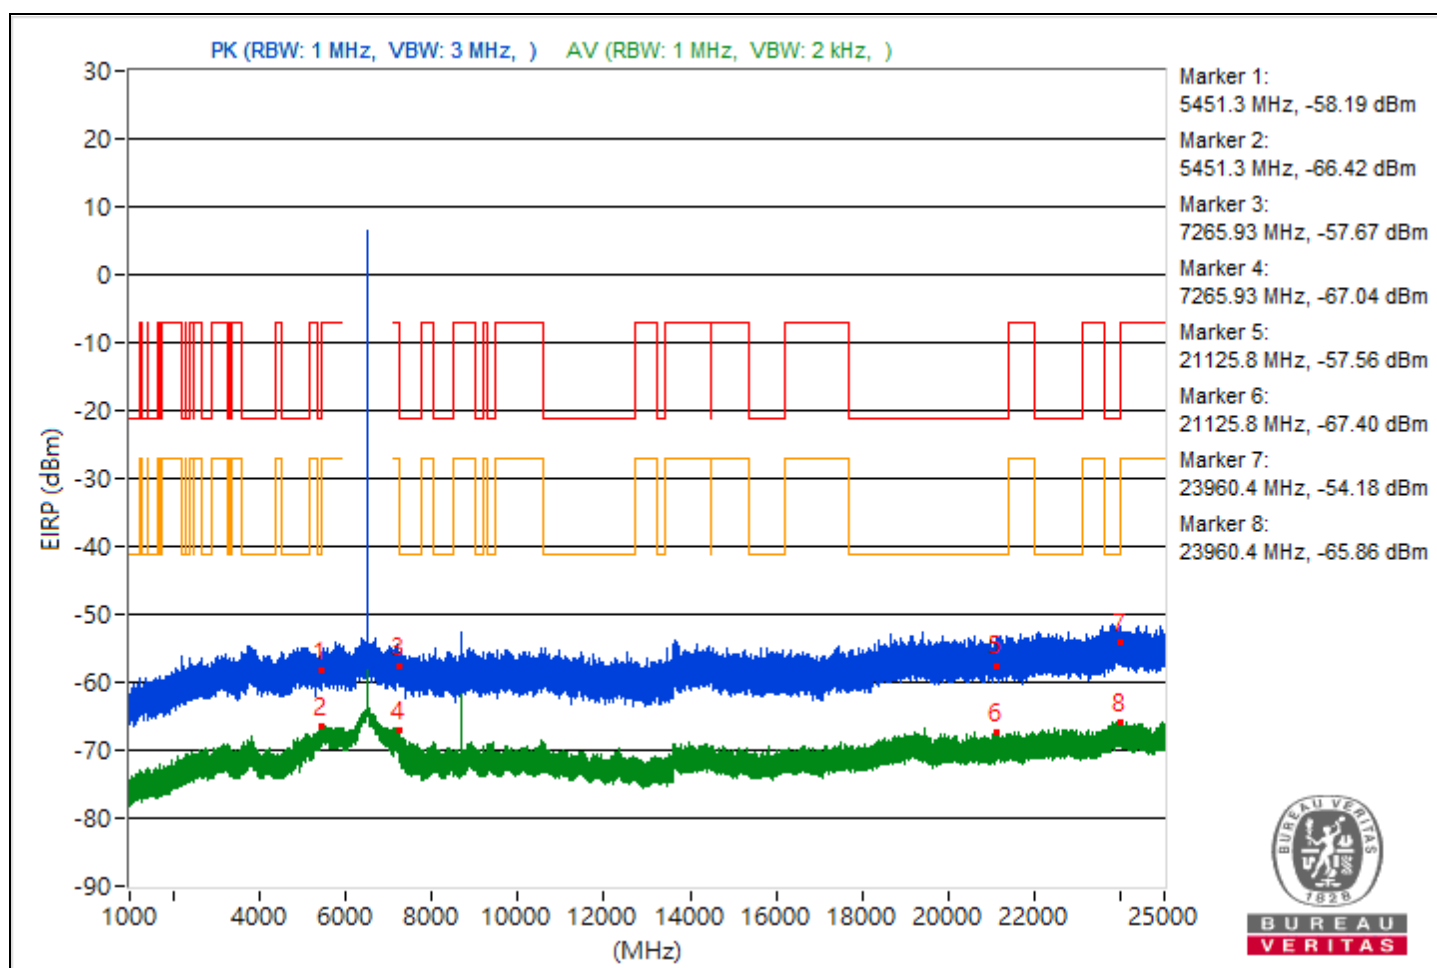


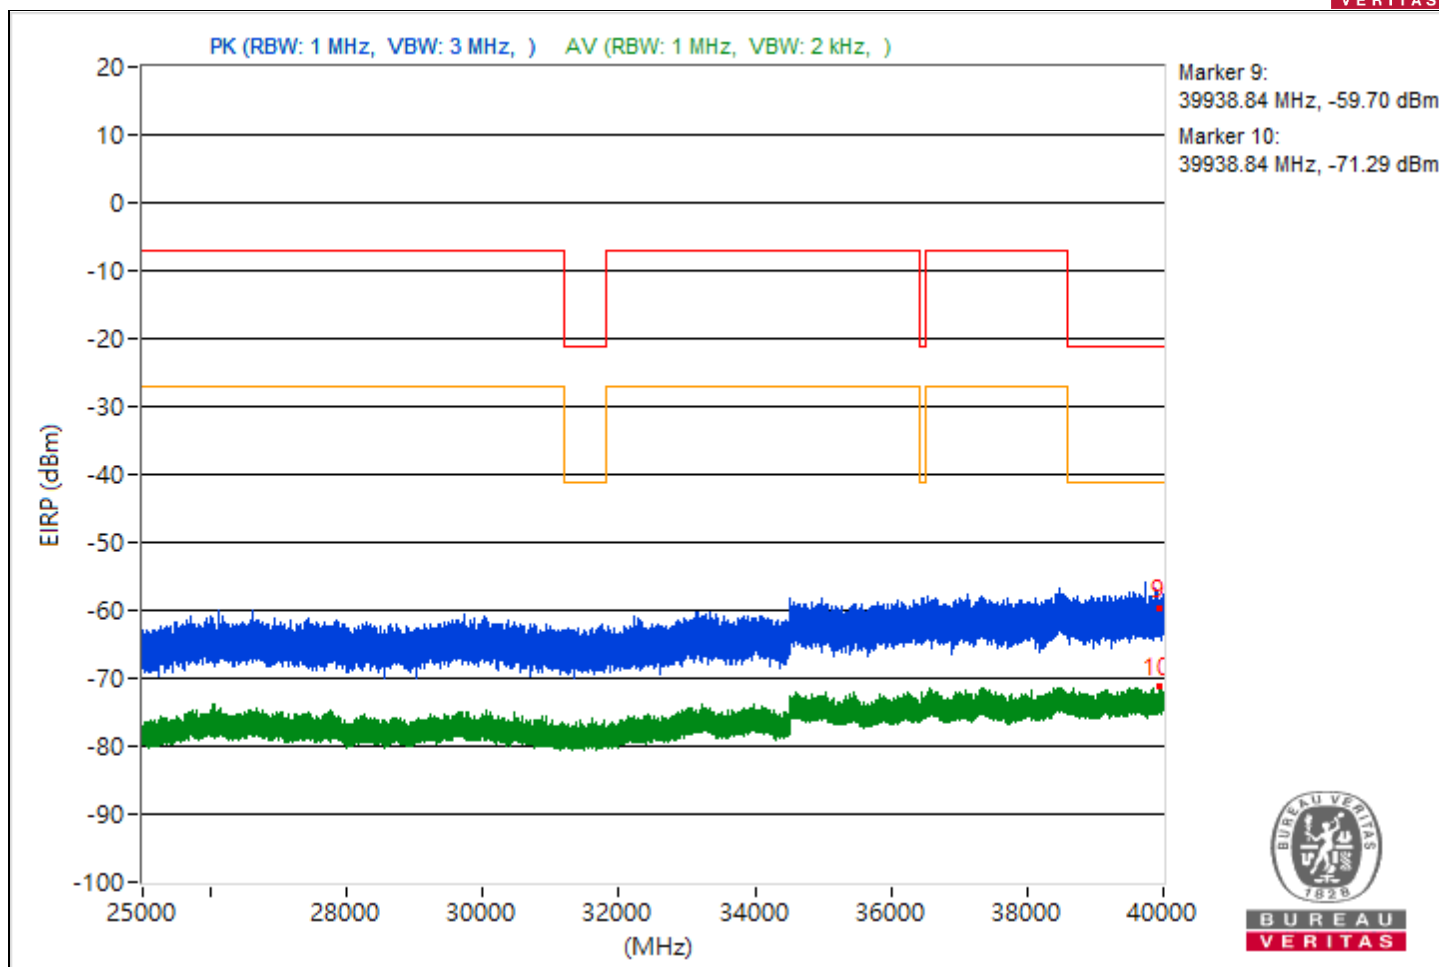


|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                     |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5456.43         | 36.87 PK                | 74             | -37.13      | -69.77                  | -69.77                  | 8.37                   | -58.39           |
| 2                            | 5456.43         | 28.71 AV                | 54             | -25.29      | -77.93                  | -77.93                  | 8.37                   | -66.55           |
| 3                            | 7257.22         | 36.33 PK                | 74             | -37.67      | -70.31                  | -70.31                  | 8.37                   | -58.93           |
| 4                            | 7257.22         | 28.61 AV                | 54             | -25.39      | -78.03                  | -78.03                  | 8.37                   | -66.65           |
| 5                            | 18709.7         | 38.56 PK                | 74             | -35.44      | -68.08                  | -68.08                  | 8.37                   | -56.7            |
| 6                            | 18709.7         | 28.84 AV                | 54             | -25.16      | -77.8                   | -77.8                   | 8.37                   | -66.42           |
| 7                            | 23939.7         | 39.37 PK                | 74             | -34.63      | -67.27                  | -67.27                  | 8.37                   | -55.89           |
| 8                            | 23939.7         | 30.56 AV                | 54             | -23.44      | -76.08                  | -76.08                  | 8.37                   | -64.7            |
| 9                            | 39545.87        | 33.47 PK                | 74             | -40.53      | -73.17                  | -73.17                  | 8.37                   | -61.79           |
| 10                           | 39545.87        | 25.05 AV                | 54             | -28.95      | -81.59                  | -81.59                  | 8.37                   | -70.21           |

Note: Margin value = Emission Level - Limit value

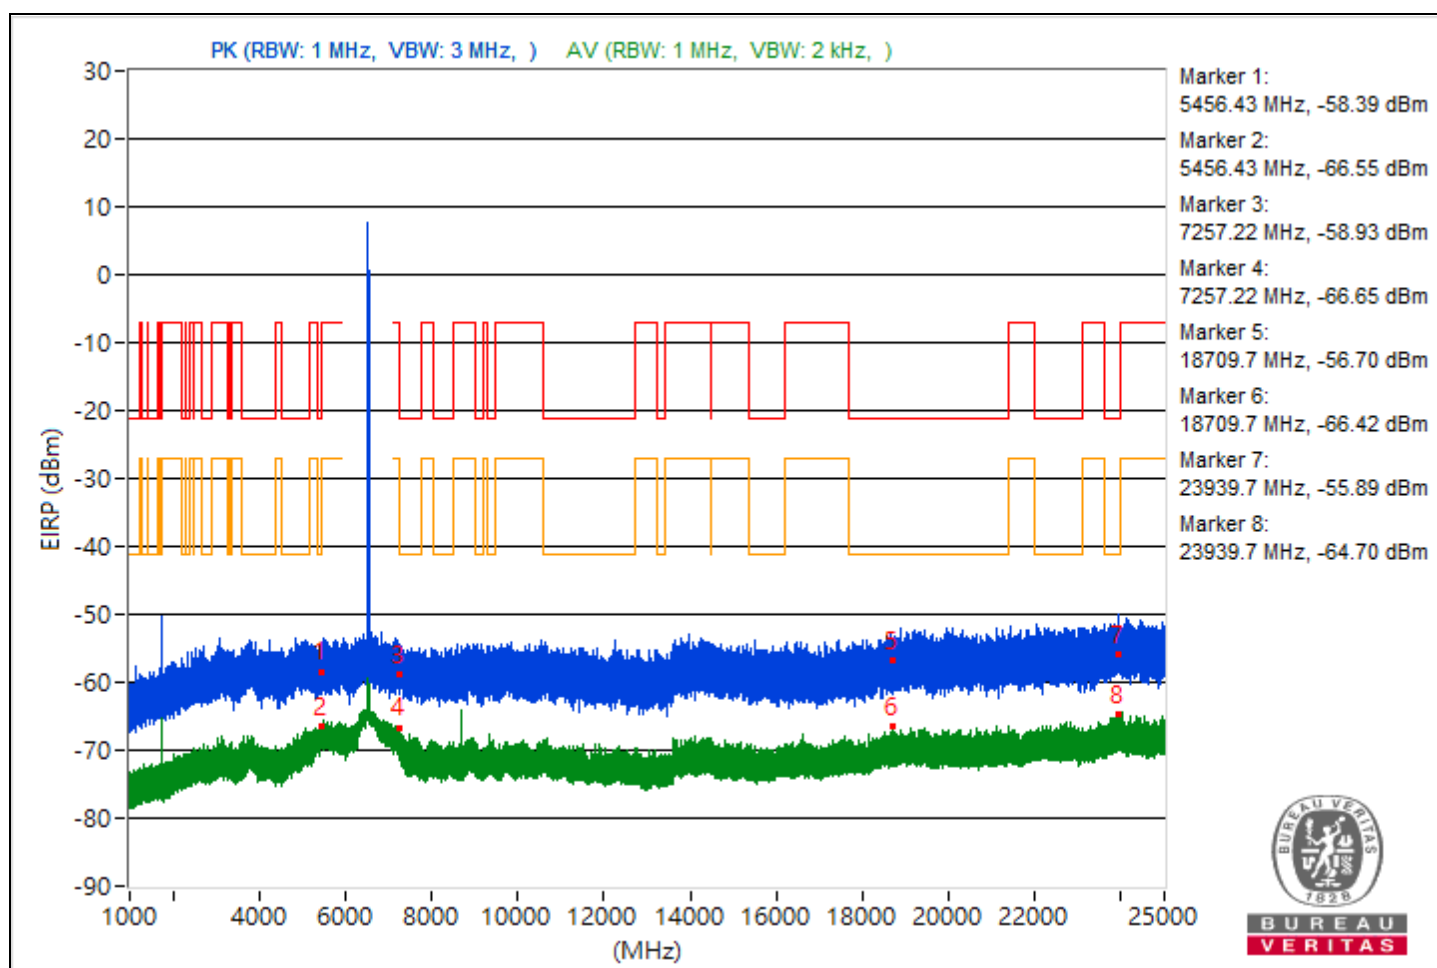


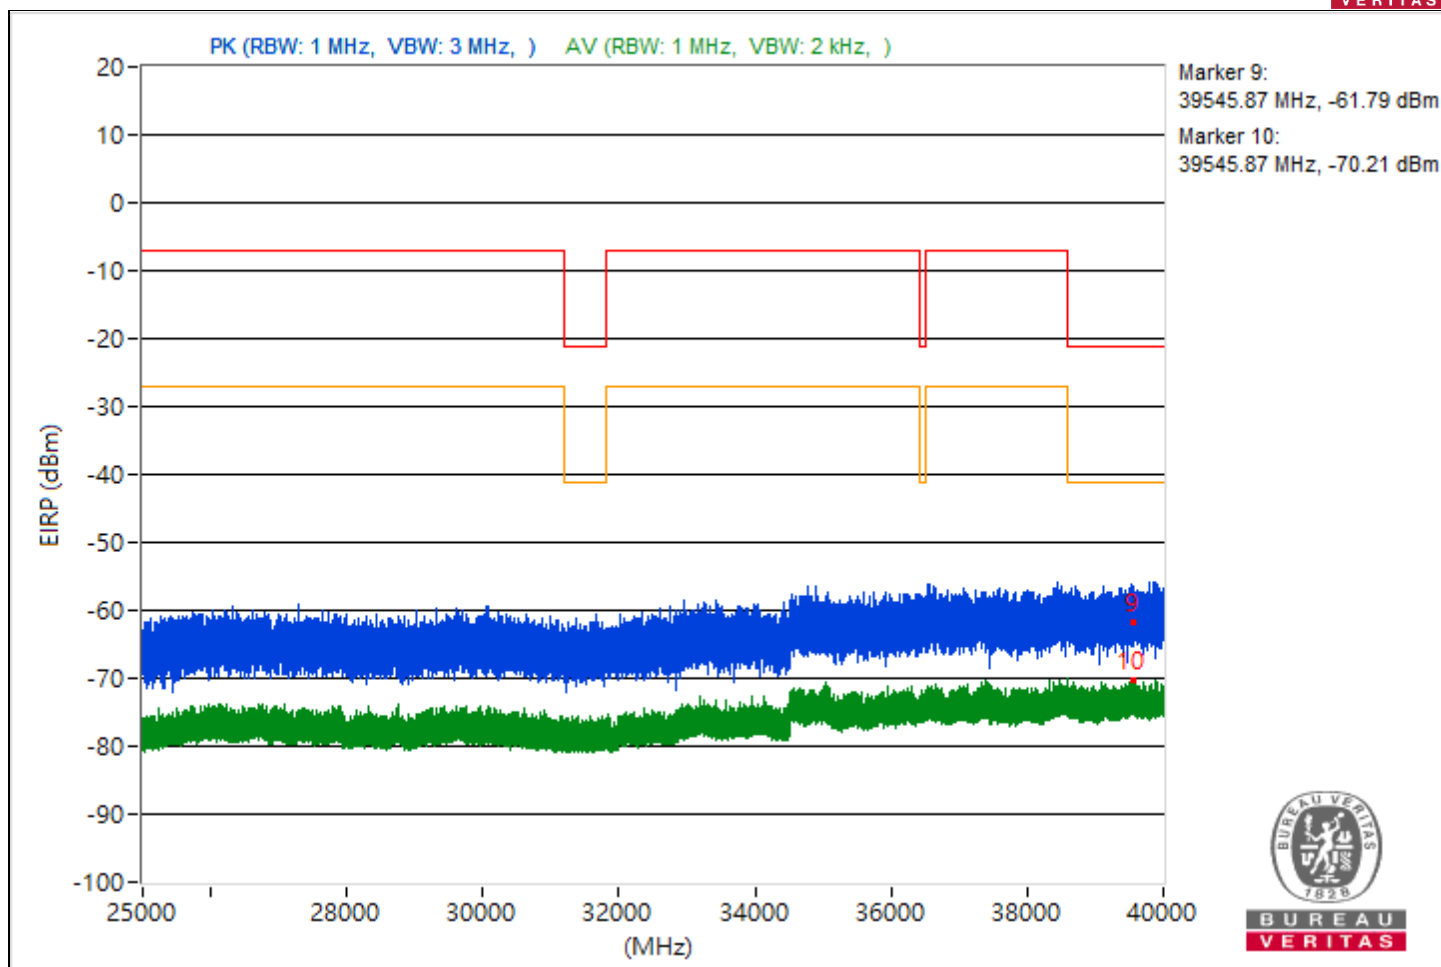


|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                     |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5458.14         | 38.3 PK                 | 74             | -35.7       | -69.13                  | -67.68                  | 8.37                   | -56.96           |
| 2                            | 5458.14         | 28.75 AV                | 54             | -25.25      | -78.38                  | -77.44                  | 8.37                   | -66.51           |
| 3                            | 9166.67         | 42.29 PK                | 74             | -31.71      | -62.21                  | -68.73                  | 8.37                   | -52.97           |
| 4                            | 9166.67         | 34.66 AV                | 54             | -19.34      | -69.43                  | -78.98                  | 8.37                   | -60.6            |
| 5                            | 20335.4         | 37.94 PK                | 74             | -36.06      | -70.4                   | -67.48                  | 8.37                   | -57.32           |
| 6                            | 20335.4         | 27.68 AV                | 54             | -26.32      | -77.55                  | -81.06                  | 8.37                   | -67.58           |
| 7                            | 23870.4         | 39.35 PK                | 74             | -34.65      | -66.85                  | -67.78                  | 8.37                   | -55.91           |
| 8                            | 23870.4         | 29.2 AV                 | 54             | -24.8       | -75.67                  | -80.46                  | 8.37                   | -66.06           |
| 9                            | 39612.71        | 34.04 PK                | 74             | -39.96      | -71.36                  | -74.33                  | 8.37                   | -61.22           |
| 10                           | 39612.71        | 23.69 AV                | 54             | -30.31      | -85.73                  | -81.27                  | 8.37                   | -71.57           |

Note: Margin value = Emission Level - Limit value

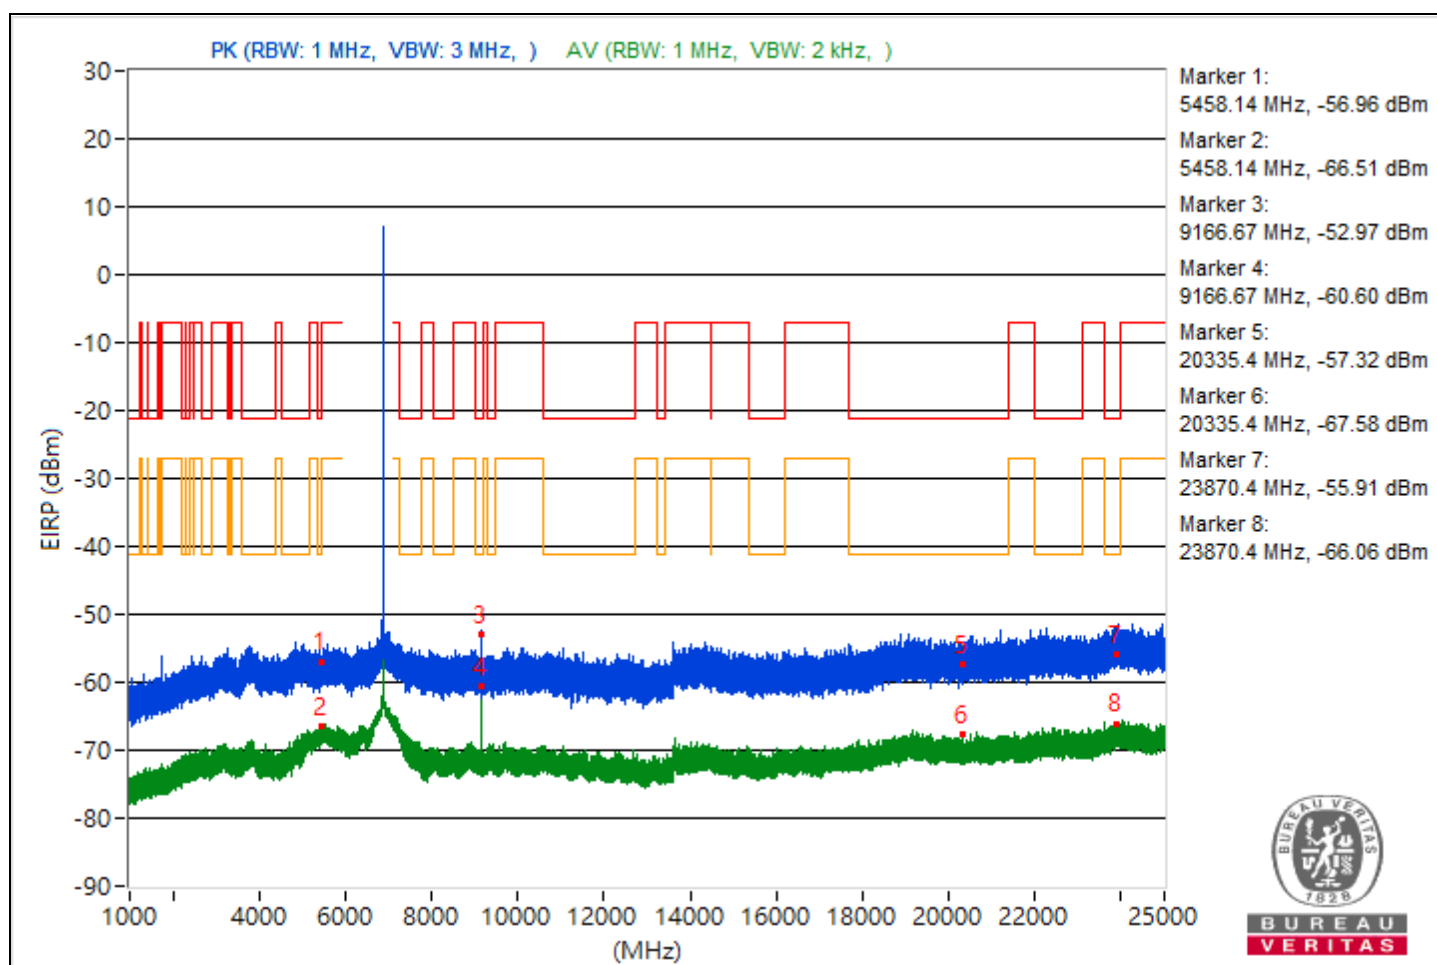


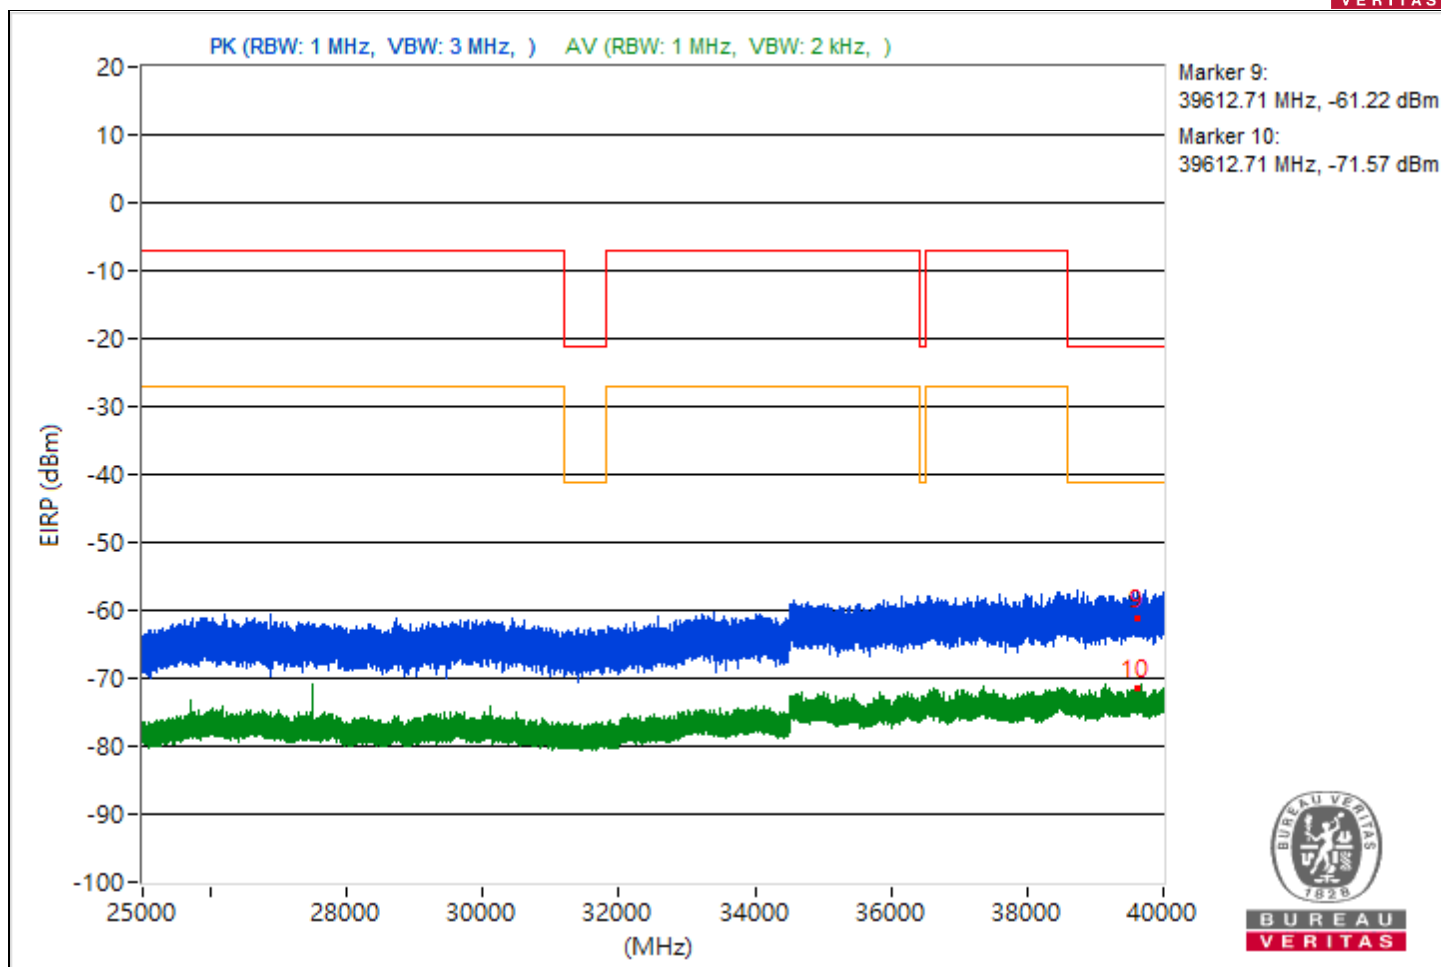


|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                     |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5437.22         | 35.91 PK                | 74             | -38.09      | -70.73                  | -70.73                  | 8.37                   | -59.35           |
| 2                            | 5437.22         | 28.51 AV                | 54             | -25.49      | -78.13                  | -78.13                  | 8.37                   | -66.75           |
| 3                            | 7250.84         | 40.95 PK                | 74             | -33.05      | -65.69                  | -65.69                  | 8.37                   | -54.31           |
| 4                            | 7250.84         | 30.41 AV                | 54             | -23.59      | -76.23                  | -76.23                  | 8.37                   | -64.85           |
| 5                            | 20246           | 39.14 PK                | 74             | -34.86      | -67.5                   | -67.5                   | 8.37                   | -56.12           |
| 6                            | 20246           | 28.98 AV                | 54             | -25.02      | -77.66                  | -77.66                  | 8.37                   | -66.28           |
| 7                            | 23976.7         | 41.14 PK                | 74             | -32.86      | -65.5                   | -65.5                   | 8.37                   | -54.12           |
| 8                            | 23976.7         | 30.46 AV                | 54             | -23.54      | -76.18                  | -76.18                  | 8.37                   | -64.8            |
| 9                            | 39159.56        | 32.18 PK                | 74             | -41.82      | -74.46                  | -74.46                  | 8.37                   | -63.08           |
| 10                           | 39159.56        | 25.22 AV                | 54             | -28.78      | -81.42                  | -81.42                  | 8.37                   | -70.04           |

Note: Margin value = Emission Level - Limit value

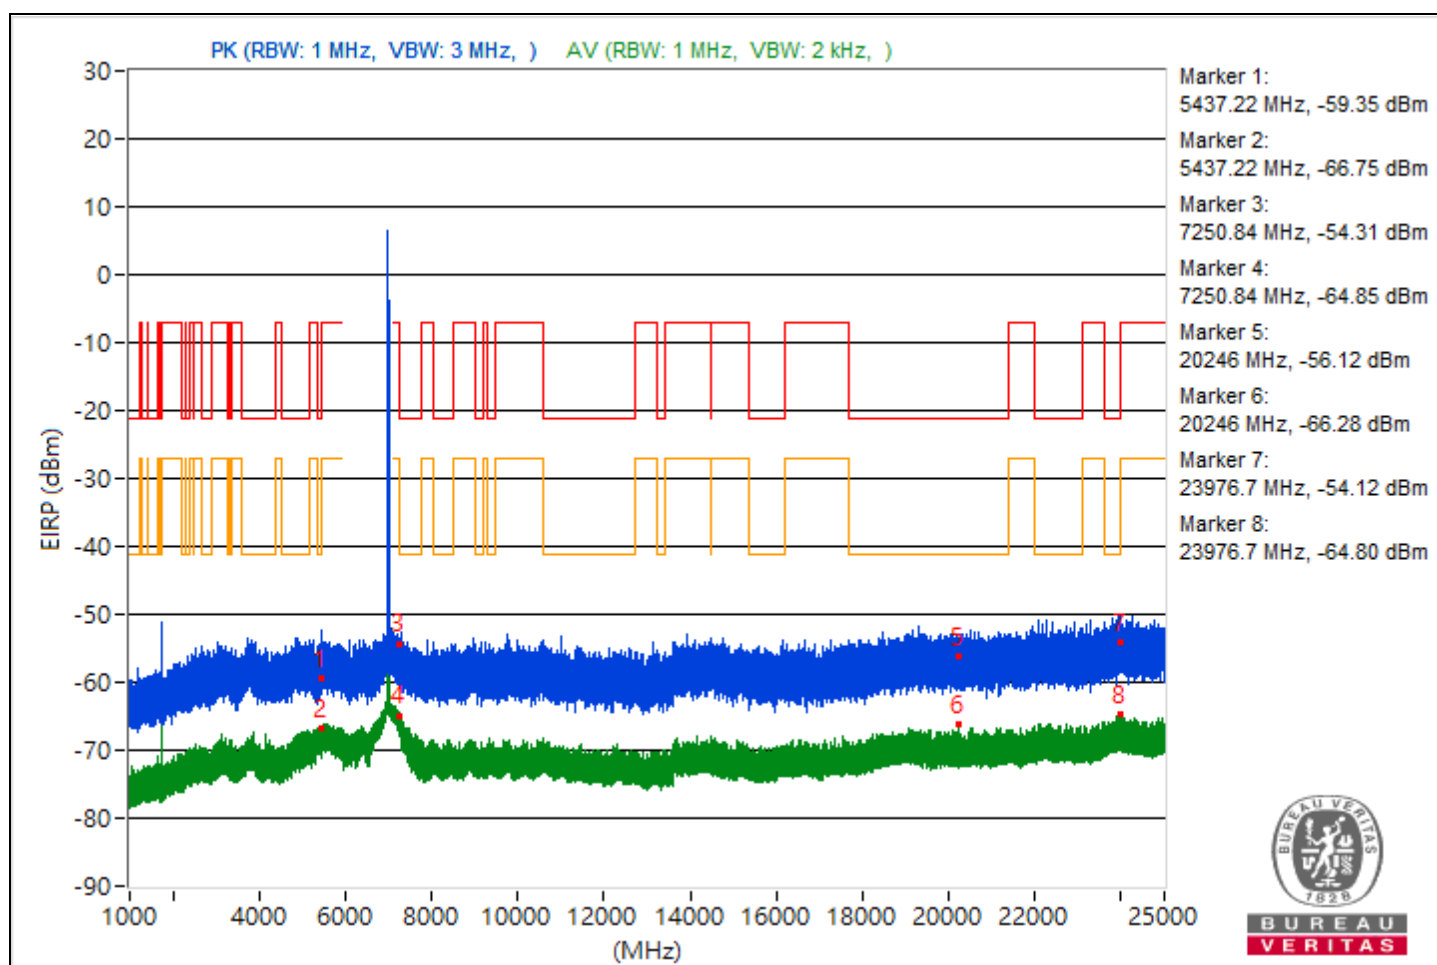


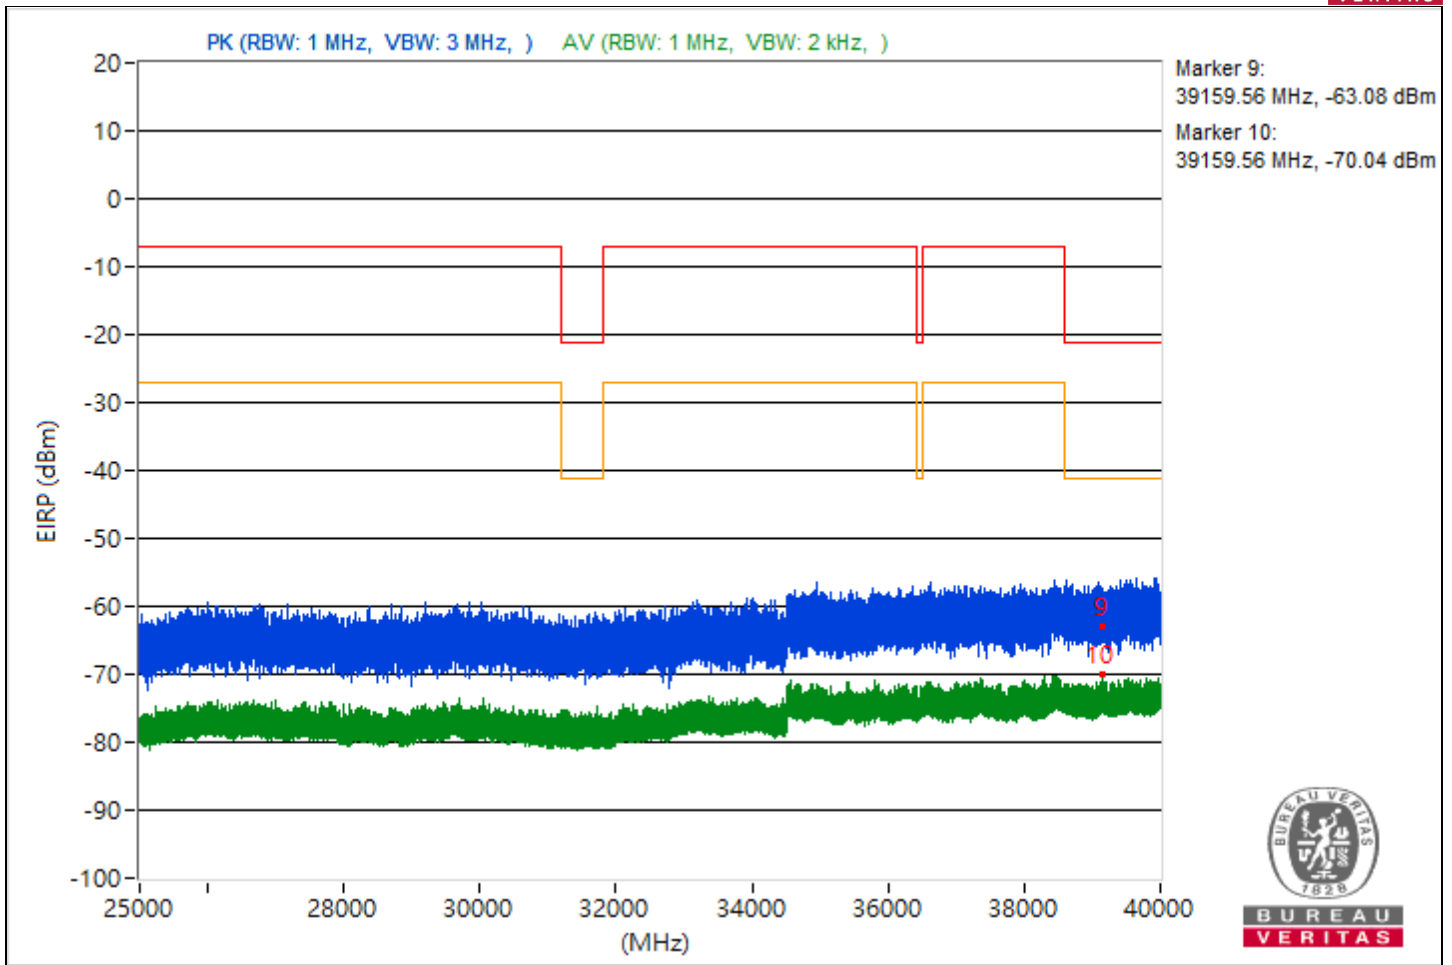


|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                     |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5394.21         | 37.18 PK                | 74             | -36.82      | -69.73                  | -69.2                   | 8.37                   | -58.08           |
| 2                            | 5394.21         | 28.68 AV                | 54             | -25.32      | -77.68                  | -78.26                  | 8.37                   | -66.58           |
| 3                            | 7260.88         | 38.94 PK                | 74             | -35.06      | -68.25                  | -67.22                  | 8.37                   | -56.32           |
| 4                            | 7260.88         | 31.62 AV                | 54             | -22.38      | -76.08                  | -74.17                  | 8.37                   | -63.64           |
| 5                            | 20924.5         | 37.53 PK                | 74             | -36.47      | -67.86                  | -70.86                  | 8.37                   | -57.73           |
| 6                            | 20924.5         | 27.71 AV                | 54             | -26.29      | -77.65                  | -80.74                  | 8.37                   | -67.55           |
| 7                            | 23937           | 42.22 PK                | 74             | -31.78      | -64.49                  | -64.35                  | 8.37                   | -53.04           |
| 8                            | 23937           | 29.44 AV                | 54             | -24.56      | -78.93                  | -75.97                  | 8.37                   | -65.82           |
| 9                            | 38600.18        | 34.73 PK                | 74             | -39.27      | -71.97                  | -71.84                  | 8.37                   | -60.53           |
| 10                           | 38600.18        | 23.51 AV                | 54             | -30.49      | -81.52                  | -85.72                  | 8.37                   | -71.75           |

Note: Margin value = Emission Level - Limit value

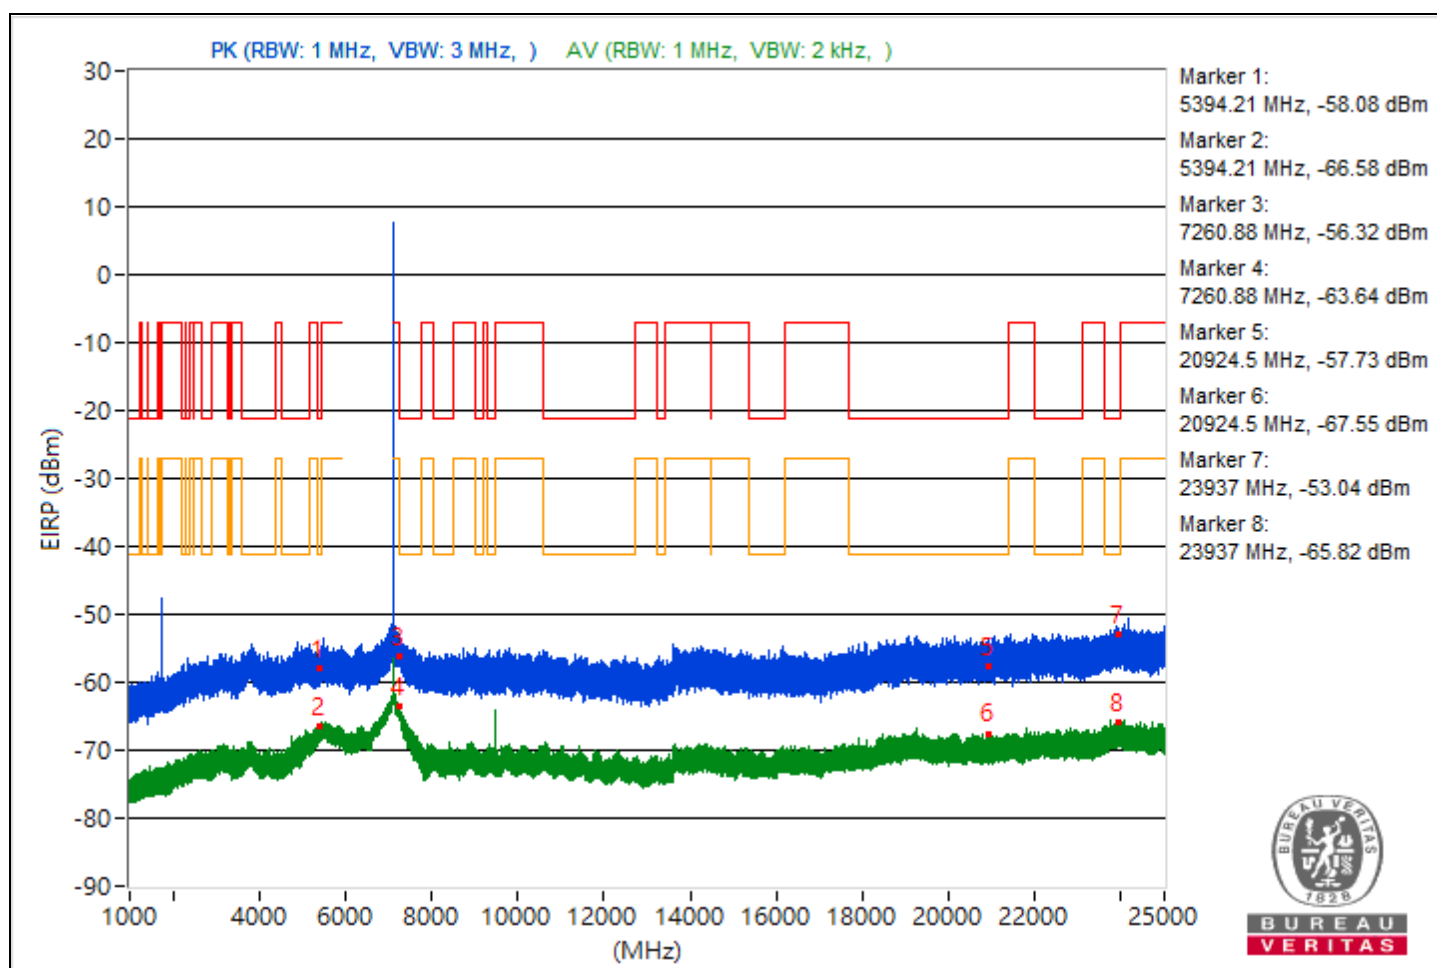

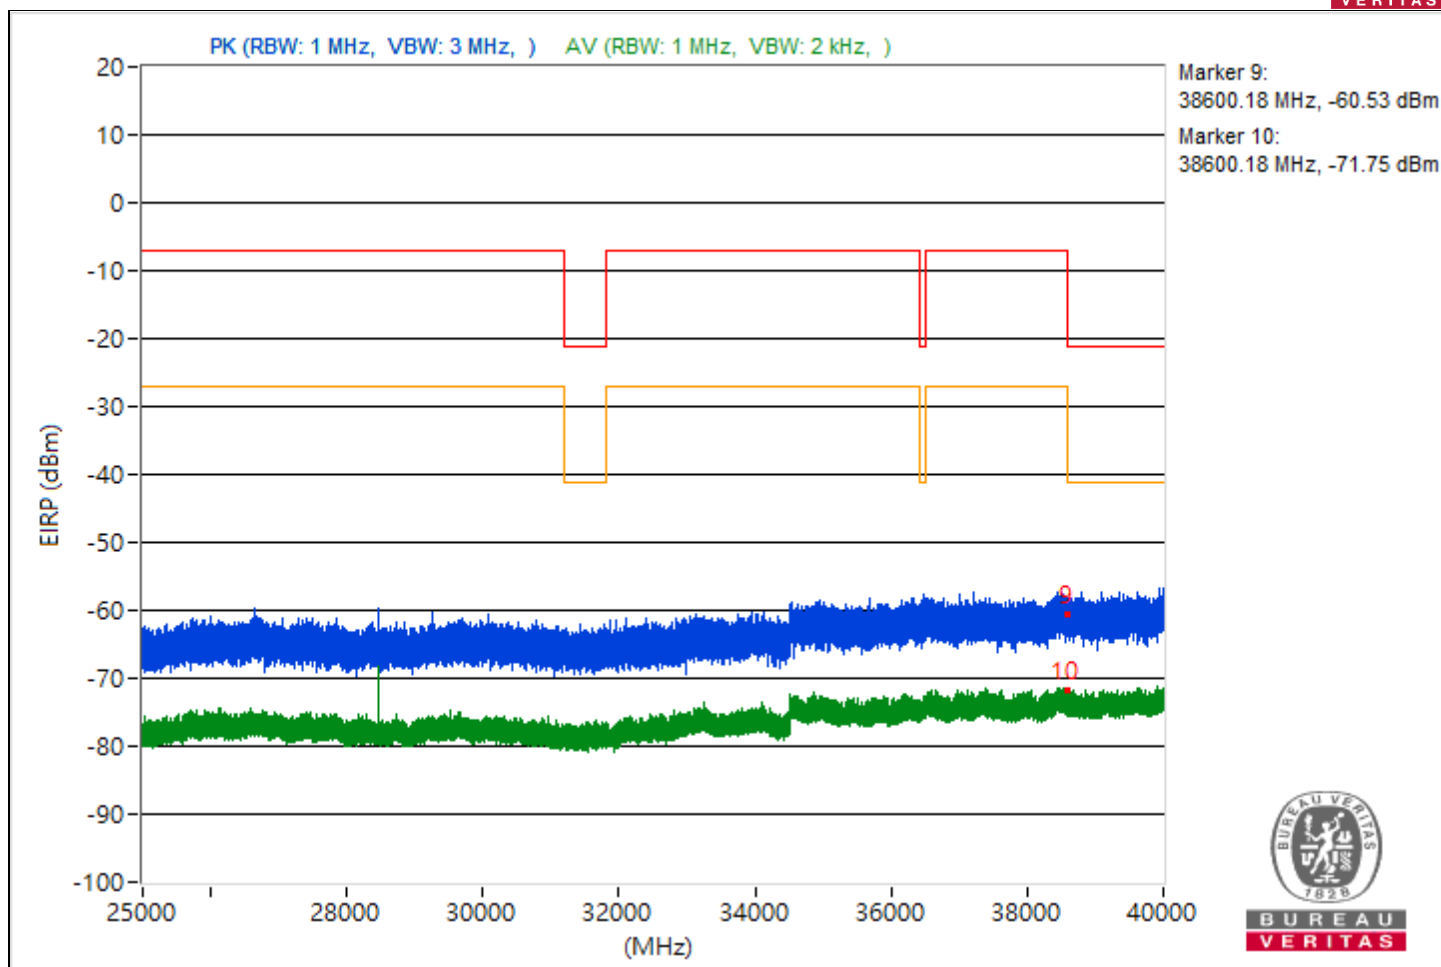



|                 |                                   |                          |                 |
|-----------------|-----------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 7 : 5985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                       |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5455.58         | 44.2 PK                 | 74             | -29.8       | -62.03                  | -62.9                   | 8.37                   | -51.06           |
| 2                            | 5455.58         | 36.03 AV                | 54             | -17.97      | -70.9                   | -70.33                  | 8.37                   | -59.23           |
| 3                            | #7980.01        | 49.47 PK                | 88.26          | -38.79      | -54.48                  | -65.64                  | 8.37                   | -45.79           |
| 4                            | #7980.01        | 48.3 AV                 | 68.26          | -19.96      | -55.42                  | -72.28                  | 8.37                   | -46.96           |
| 5                            | 21347.1         | 39.49 PK                | 74             | -34.51      | -66.67                  | -67.69                  | 8.37                   | -55.77           |
| 6                            | 21347.1         | 28.07 AV                | 54             | -25.93      | -77.64                  | -79.75                  | 8.37                   | -67.19           |
| 7                            | 23868.4         | 40.89 PK                | 74             | -33.11      | -66.94                  | -64.81                  | 8.37                   | -54.37           |
| 8                            | 23868.4         | 29.55 AV                | 54             | -24.45      | -77.84                  | -76.45                  | 8.37                   | -65.71           |
| 9                            | 39899.91        | 34.13 PK                | 74             | -39.87      | -71.32                  | -74.14                  | 8.37                   | -61.13           |
| 10                           | 39899.91        | 25.7 AV                 | 54             | -28.3       | -79.61                  | -82.86                  | 8.37                   | -69.56           |

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

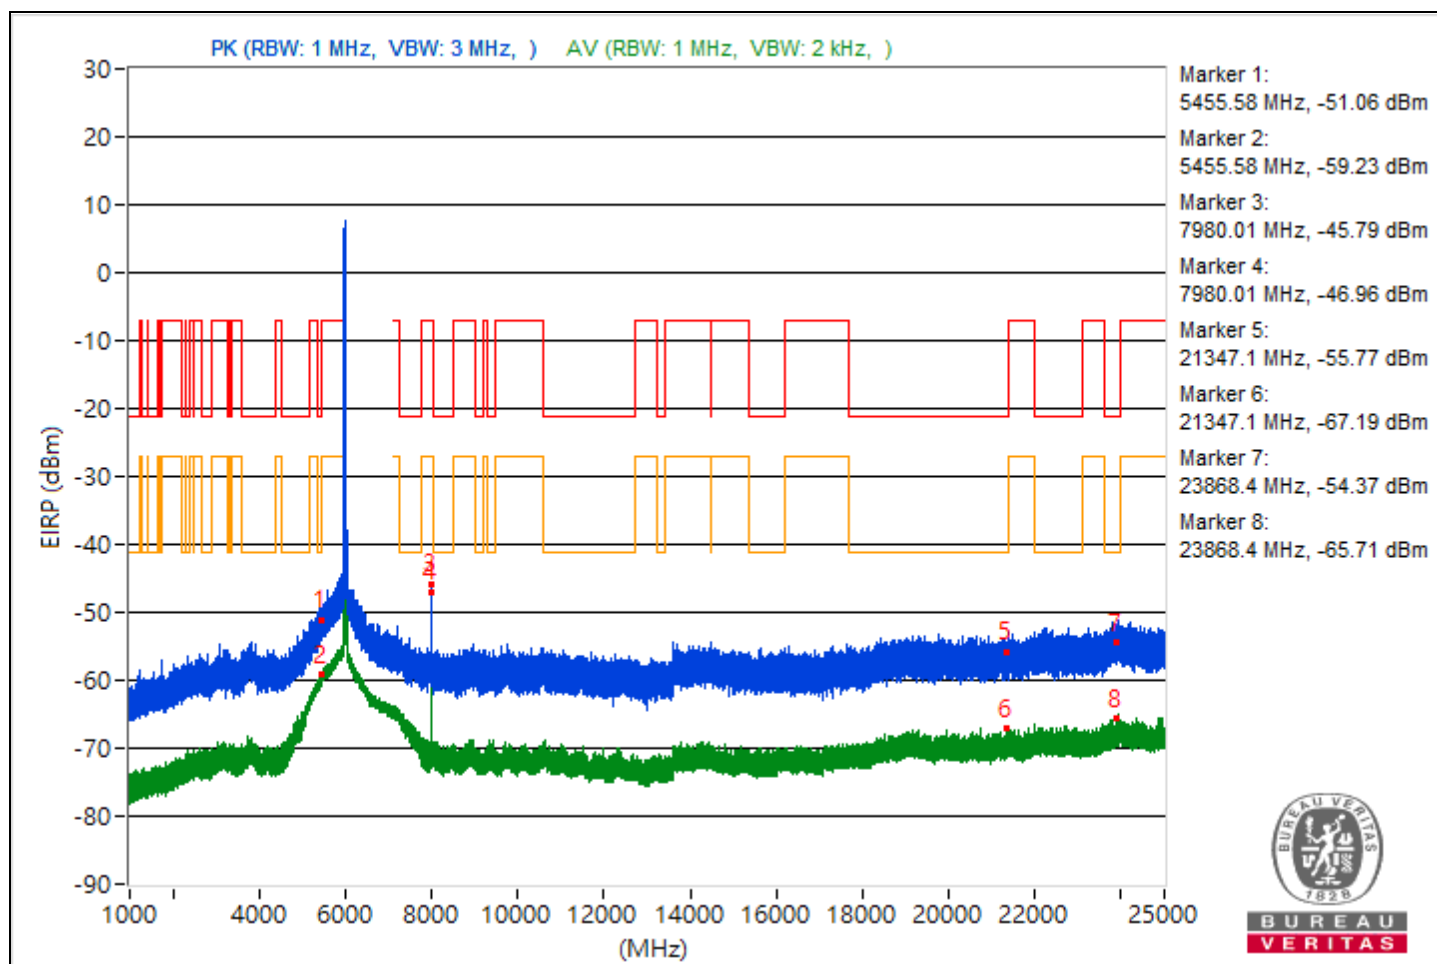

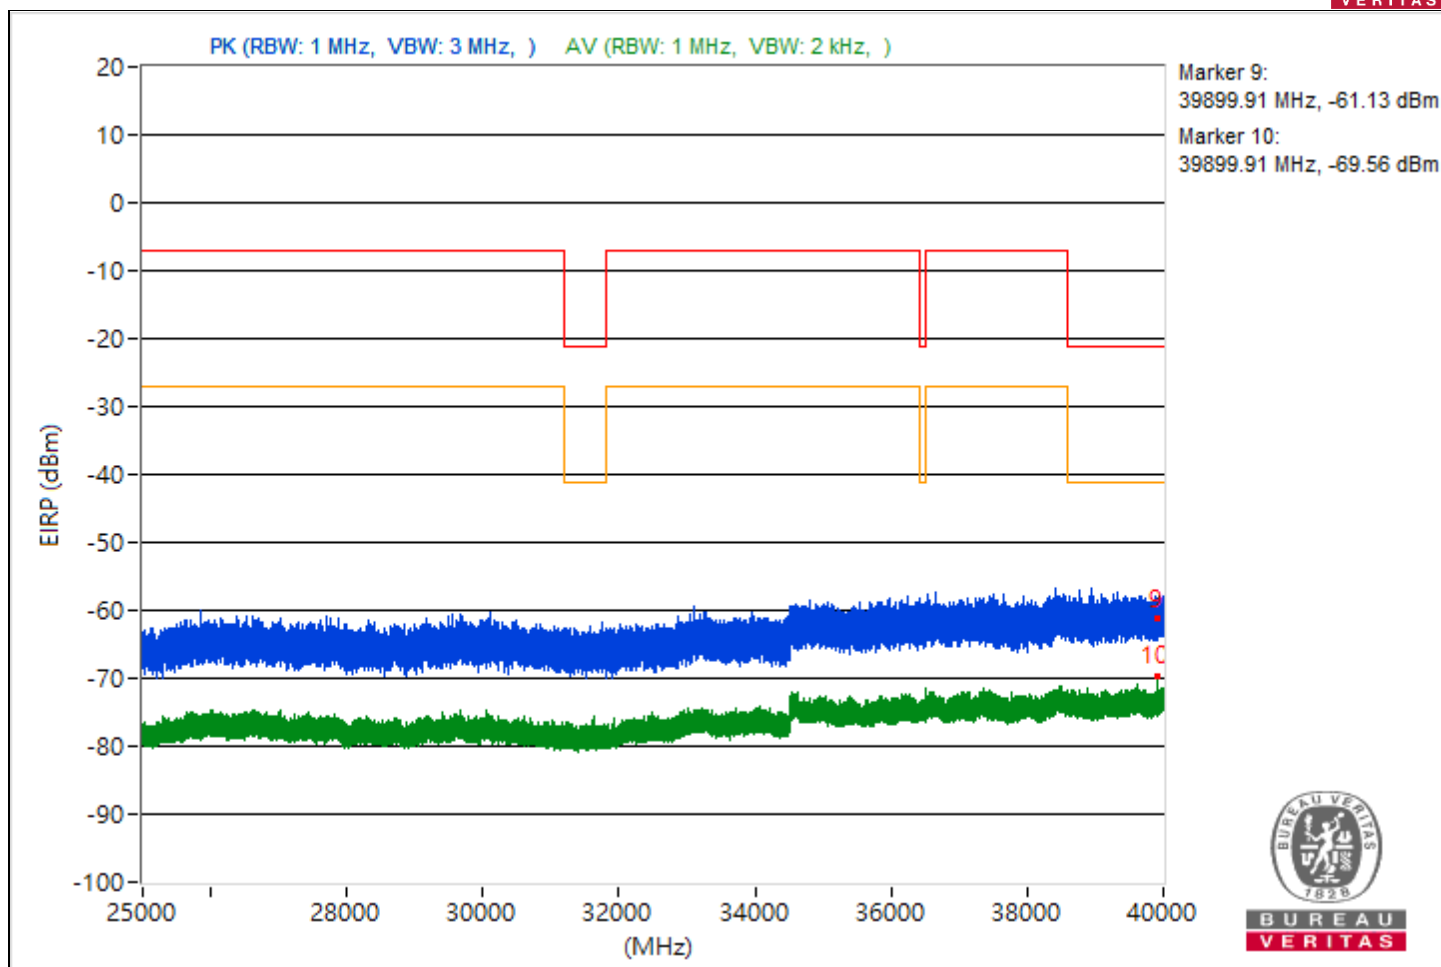



|                 |                                   |                          |                  |
|-----------------|-----------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 87 : 6385 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                       |                          |                  |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| 1   | 5446.17         | 41.63 PK                | 74             | -32.37      | -64.86                  | -65.16                  | 8.37                   | -53.63           |
| 2   | 5446.17         | 34.54 AV                | 54             | -19.46      | -72.89                  | -71.44                  | 8.37                   | -60.72           |
| 3   | 7256.13         | 40.84 PK                | 74             | -33.16      | -67.05                  | -64.83                  | 8.37                   | -54.42           |
| 4   | 7256.13         | 33.28 AV                | 54             | -20.72      | -73.21                  | -73.51                  | 8.37                   | -61.98           |
| 5   | 21359           | 37.62 PK                | 74             | -36.38      | -69.26                  | -68.8                   | 8.37                   | -57.64           |
| 6   | 21359           | 27.37 AV                | 54             | -26.63      | -77.76                  | -81.61                  | 8.37                   | -67.89           |
| 7   | 23911.8         | 40.88 PK                | 74             | -33.12      | -67.5                   | -64.52                  | 8.37                   | -54.38           |
| 8   | 23911.8         | 29.29 AV                | 54             | -24.71      | -75.68                  | -80.11                  | 8.37                   | -65.97           |
| 9   | 39064           | 34.06 PK                | 74             | -39.94      | -71.41                  | -74.18                  | 8.37                   | -61.2            |
| 10  | 39064           | 23.35 AV                | 54             | -30.65      | -81.83                  | -85.49                  | 8.37                   | -71.91           |

Note: Margin value = Emission Level - Limit value

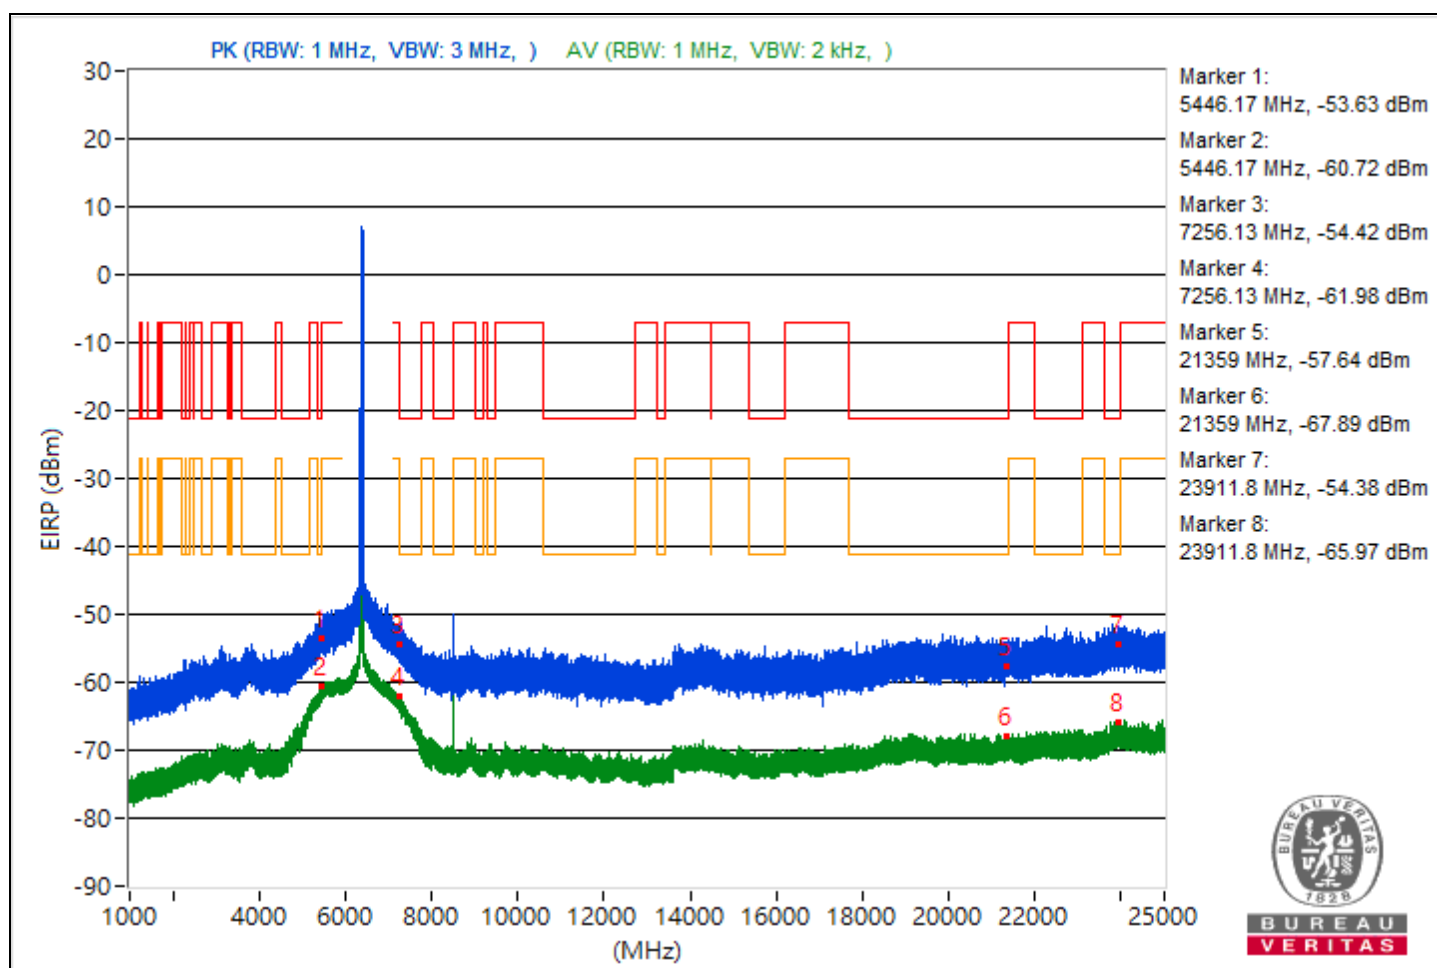


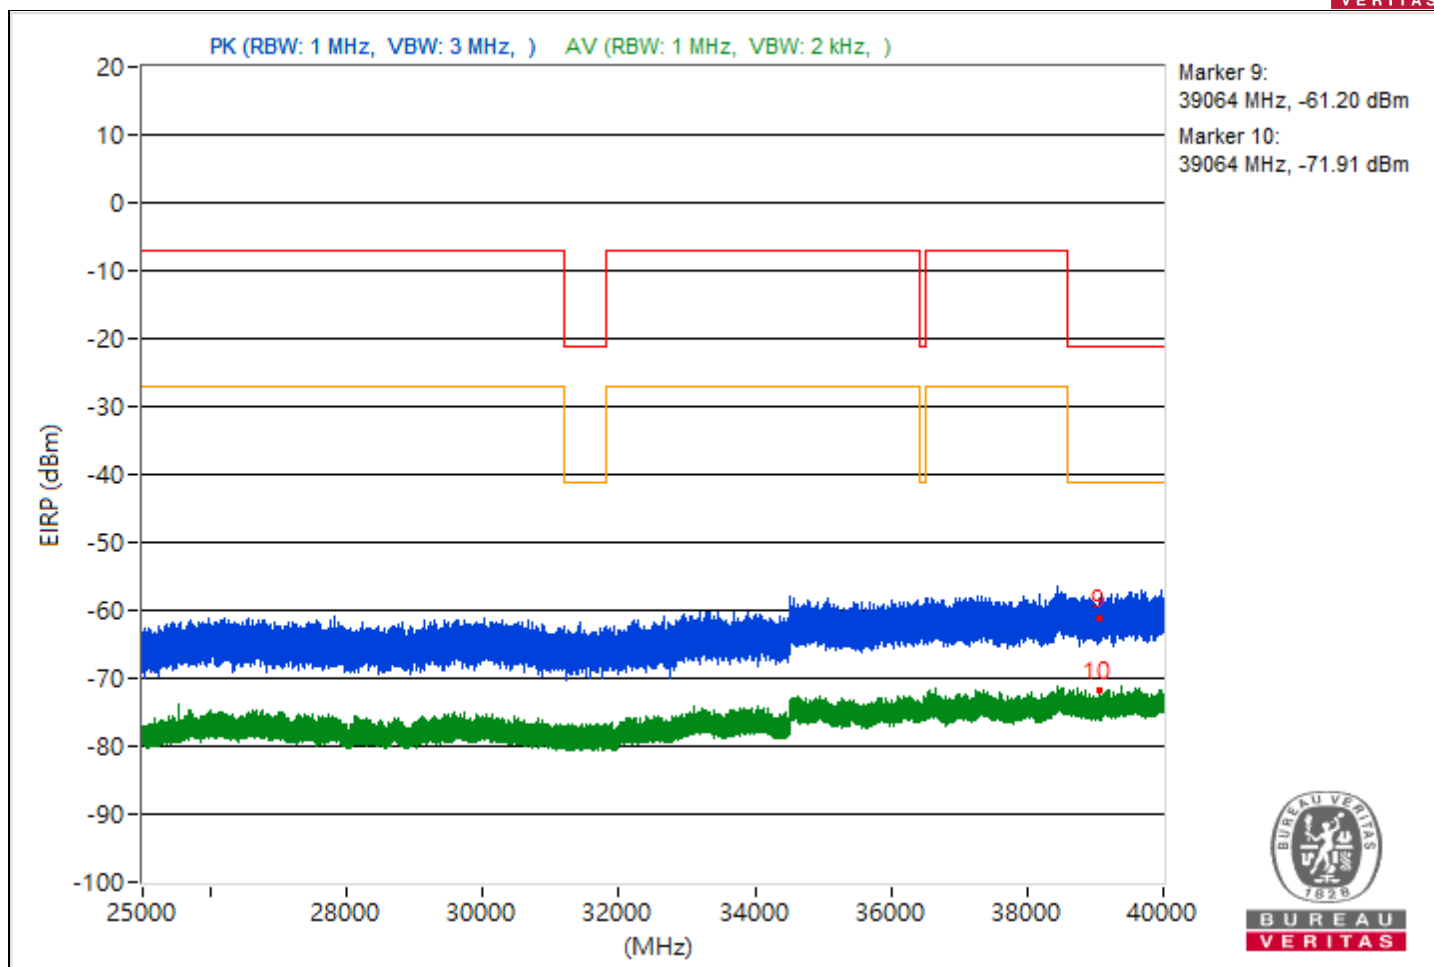


|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 103 : 6465 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                       |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5442.43         | 40.71 PK                | 74             | -33.29      | -65.05                  | -67.03                  | 8.37                   | -54.55           |
| 2                            | 5442.43         | 34.21 AV                | 54             | -19.79      | -72.7                   | -72.19                  | 8.37                   | -61.05           |
| 3                            | 7255.74         | 42.98 PK                | 74             | -31.02      | -63.51                  | -63.82                  | 8.37                   | -52.28           |
| 4                            | 7255.74         | 33.28 AV                | 54             | -20.72      | -72.69                  | -74.15                  | 8.37                   | -61.98           |
| 5                            | 21195           | 38.35 PK                | 74             | -35.65      | -67.71                  | -68.96                  | 8.37                   | -56.91           |
| 6                            | 21195           | 27.83 AV                | 54             | -26.17      | -77.31                  | -81.11                  | 8.37                   | -67.43           |
| 7                            | 23957.8         | 40.59 PK                | 74             | -33.41      | -66.64                  | -65.54                  | 8.37                   | -54.67           |
| 8                            | 23957.8         | 29.12 AV                | 54             | -24.88      | -75.92                  | -80.06                  | 8.37                   | -66.14           |
| 9                            | 39995.56        | 33.28 PK                | 74             | -40.72      | -72.25                  | -74.86                  | 8.37                   | -61.98           |
| 10                           | 39995.56        | 24.05 AV                | 54             | -29.95      | -85                     | -81.05                  | 8.37                   | -71.21           |

Note: Margin value = Emission Level - Limit value

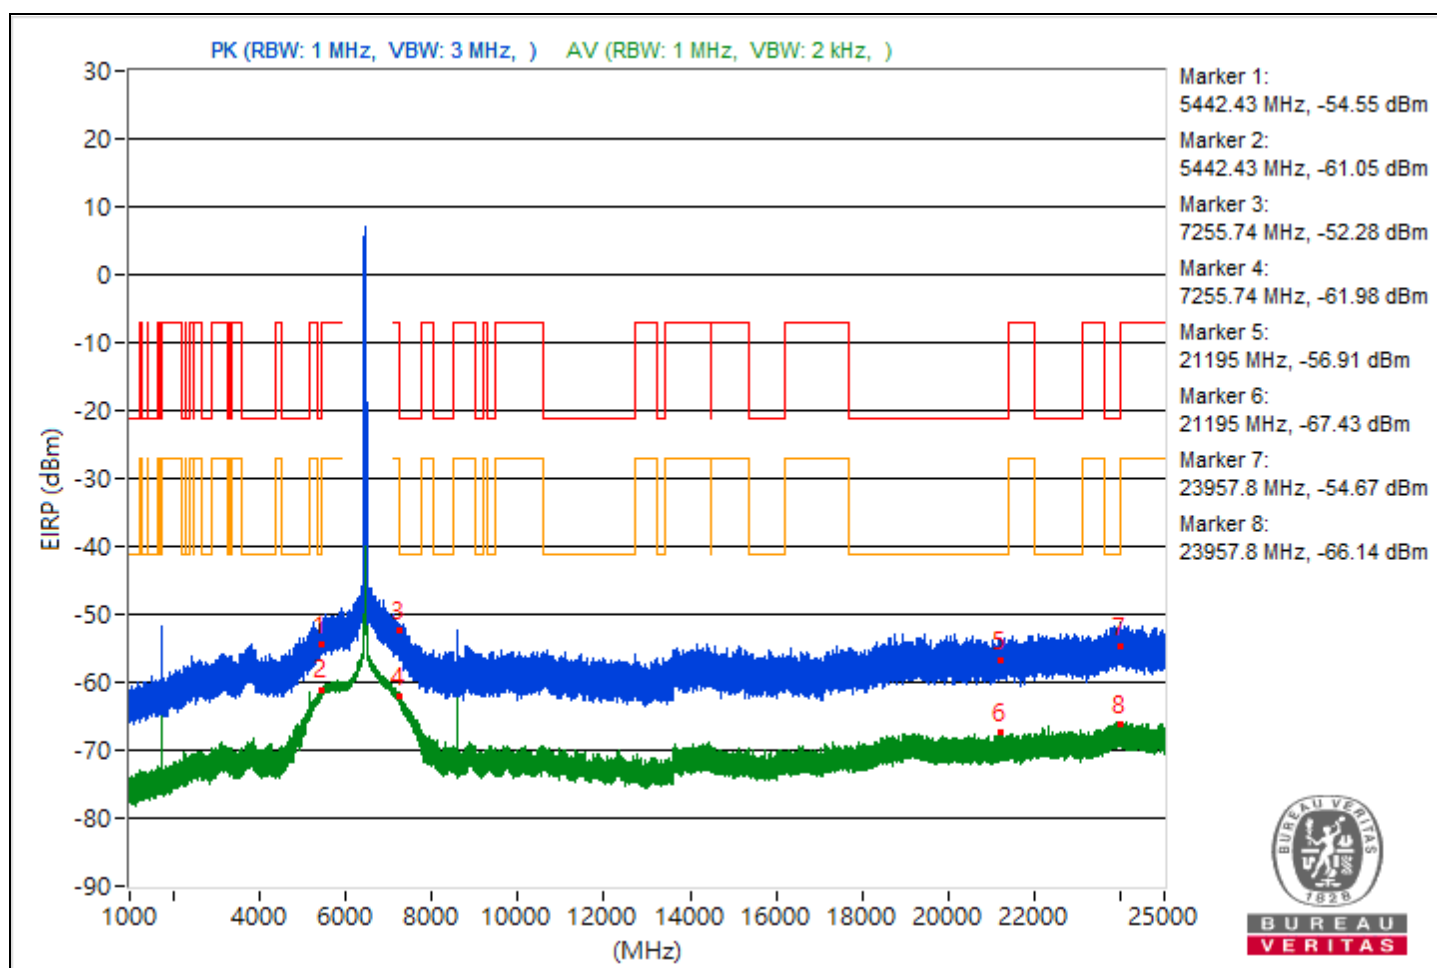


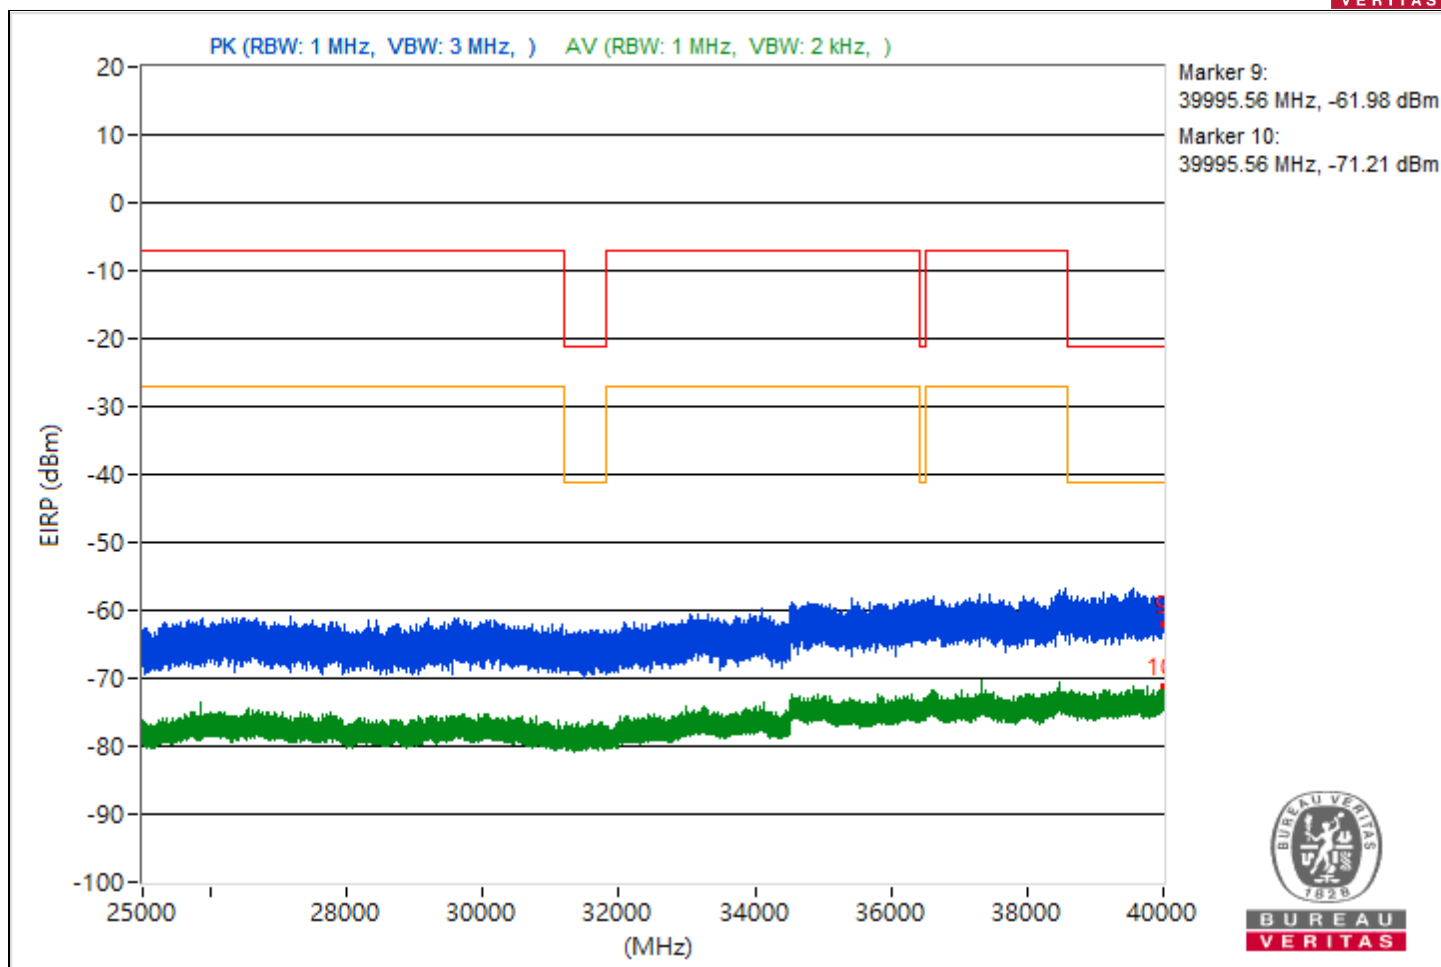


|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 119 : 6545 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                       |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5457.99         | 42.27 PK                | 74             | -31.73      | -66.08                  | -63.14                  | 8.37                   | -52.99           |
| 2                            | 5457.99         | 34.04 AV                | 54             | -19.96      | -72.37                  | -72.84                  | 8.37                   | -61.22           |
| 3                            | 7257.14         | 42.1 PK                 | 74             | -31.9       | -63.04                  | -66.87                  | 8.37                   | -53.16           |
| 4                            | 7257.14         | 33.48 AV                | 54             | -20.52      | -72.38                  | -74.12                  | 8.37                   | -61.78           |
| 5                            | 21108.6         | 38.87 PK                | 74             | -35.13      | -68.54                  | -67.12                  | 8.37                   | -56.39           |
| 6                            | 21108.6         | 27.8 AV                 | 54             | -26.2       | -76.98                  | -82.17                  | 8.37                   | -67.46           |
| 7                            | 23883.1         | 41.59 PK                | 74             | -32.41      | -66.39                  | -64.03                  | 8.37                   | -53.67           |
| 8                            | 23883.1         | 29.29 AV                | 54             | -24.71      | -79.77                  | -75.81                  | 8.37                   | -65.97           |
| 9                            | 39606.31        | 36.2 PK                 | 74             | -37.8       | -74.34                  | -68.42                  | 8.37                   | -59.06           |
| 10                           | 39606.31        | 23.7 AV                 | 54             | -30.3       | -85.89                  | -81.21                  | 8.37                   | -71.56           |

Note: Margin value = Emission Level - Limit value

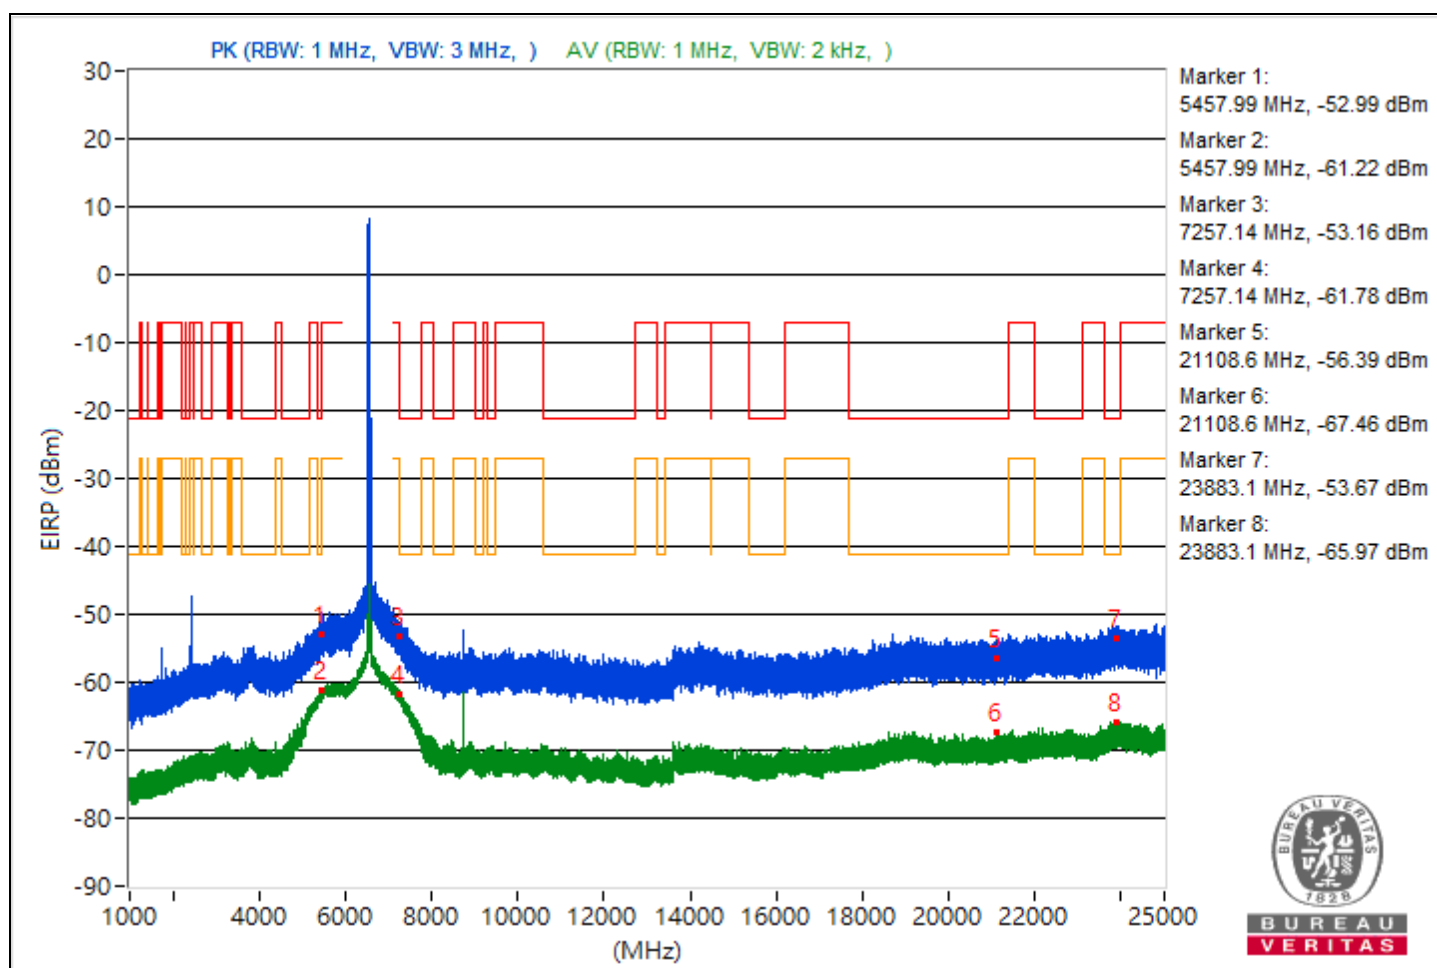

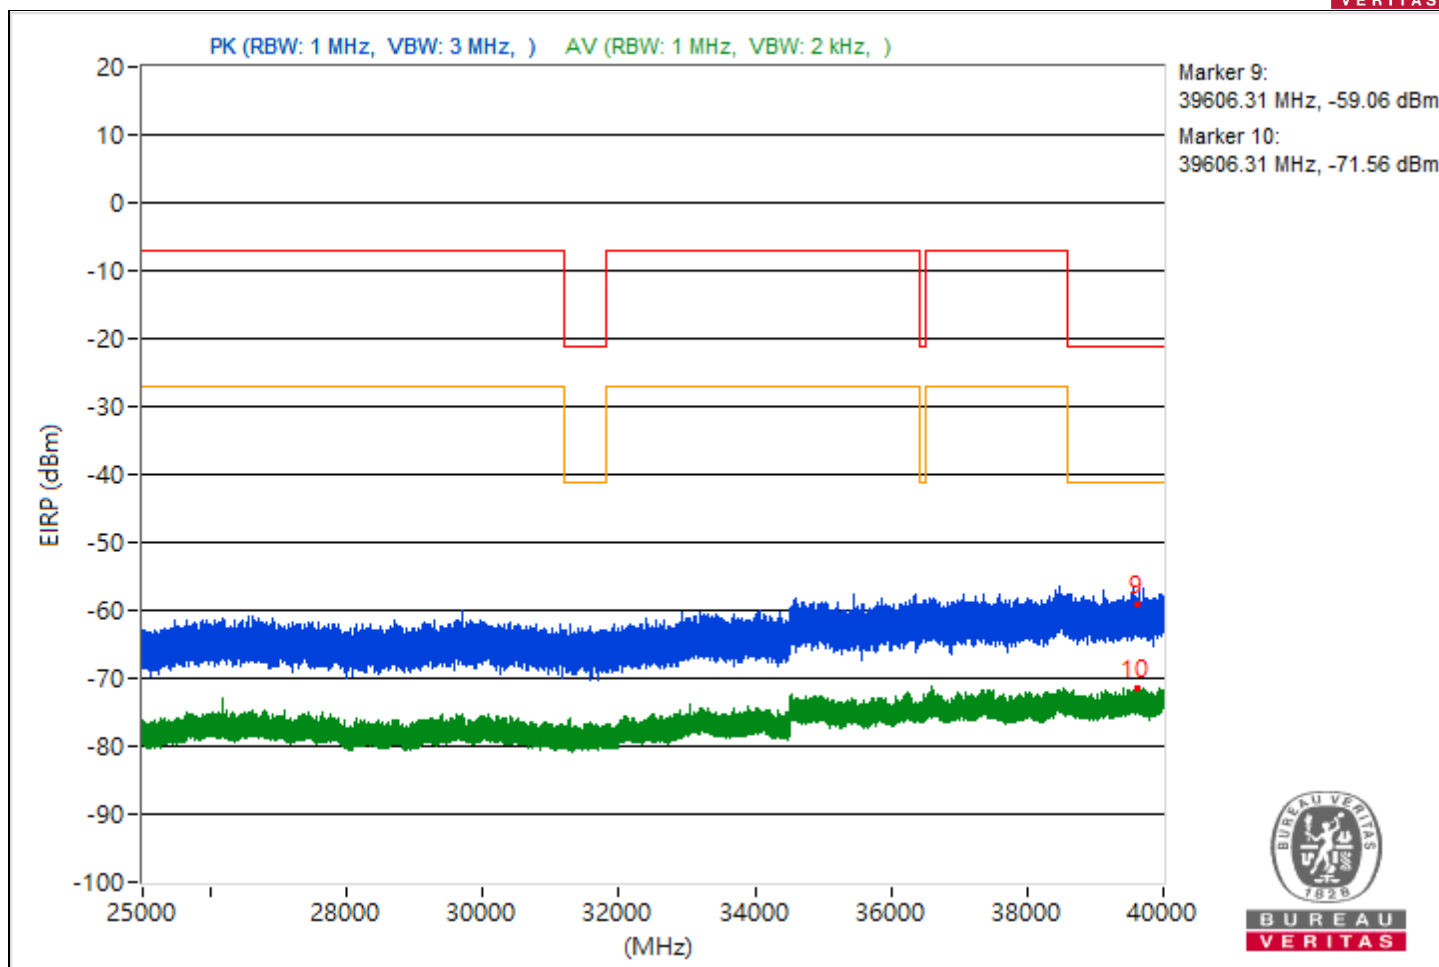



|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 183 : 6865 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                       |                          |                   |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| 1   | 5459.86         | 41.37 PK                | 74             | -32.63      | -65.98                  | -64.66                  | 8.37                   | -53.89           |
| 2   | 5459.86         | 33.12 AV                | 54             | -20.88      | -73.29                  | -73.77                  | 8.37                   | -62.14           |
| 3   | 7273.4          | 43.05 PK                | 74             | -30.95      | -62.4                   | -65.24                  | 8.37                   | -52.21           |
| 4   | 7273.4          | 36.23 AV                | 54             | -17.77      | -70.66                  | -70.18                  | 8.37                   | -59.03           |
| 5   | 21383.8         | 38.37 PK                | 74             | -35.63      | -69.78                  | -67.16                  | 8.37                   | -56.89           |
| 6   | 21383.8         | 28.03 AV                | 54             | -25.97      | -77.63                  | -79.89                  | 8.37                   | -67.23           |
| 7   | 23887.1         | 40.47 PK                | 74             | -33.53      | -66.38                  | -65.98                  | 8.37                   | -54.79           |
| 8   | 23887.1         | 28.83 AV                | 54             | -25.17      | -79.42                  | -76.65                  | 8.37                   | -66.43           |
| 9   | 39600.53        | 32.47 PK                | 74             | -41.53      | -73.33                  | -75.2                   | 8.37                   | -62.79           |
| 10  | 39600.53        | 23.66 AV                | 54             | -30.34      | -81.63                  | -84.96                  | 8.37                   | -71.6            |

Note: Margin value = Emission Level - Limit value

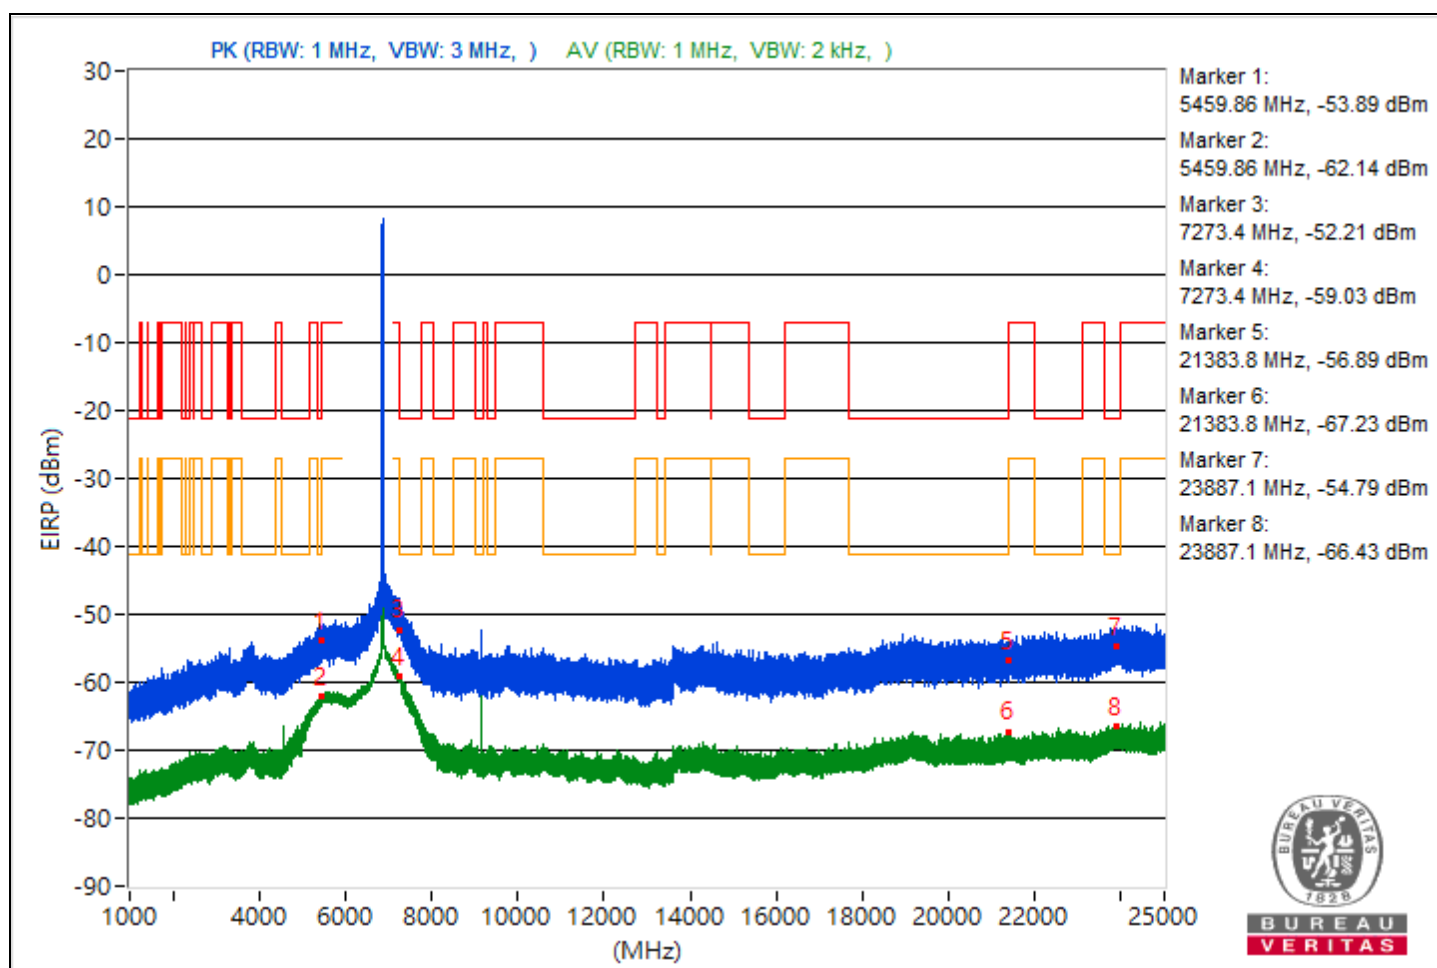

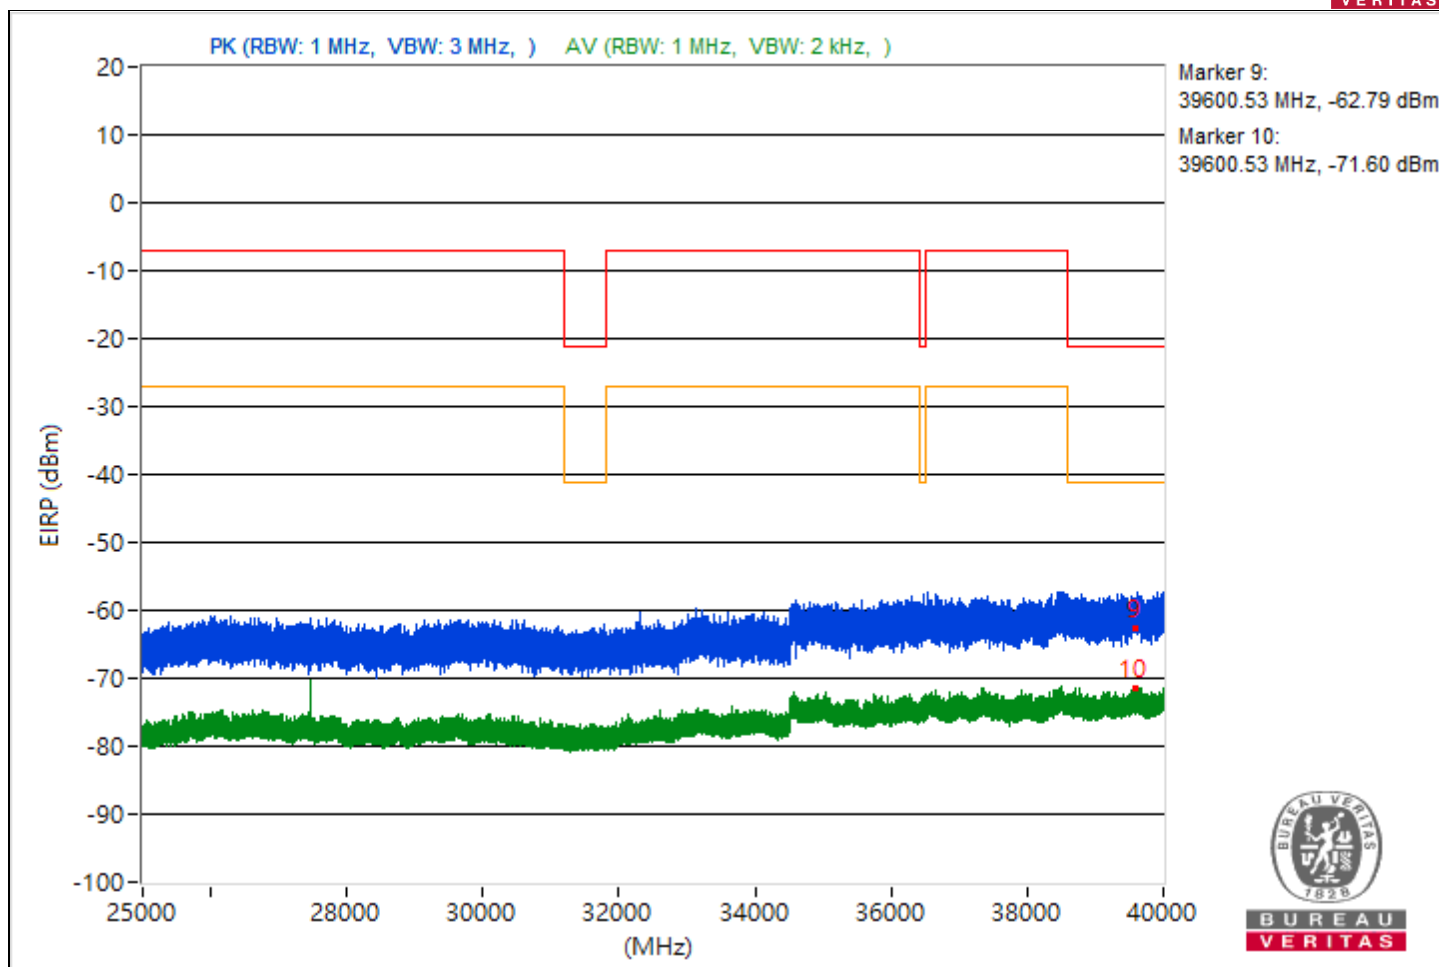



|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 199 : 6945 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                       |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| 1   | 5447.41         | 42.21 PK                | 74             | -31.79      | -64.2                   | -64.68                  | 8.37                   | -53.05           |
| 2   | 5447.41         | 33.6 AV                 | 54             | -20.4       | -73.52                  | -72.61                  | 8.37                   | -61.66           |
| 3   | 7250.14         | 46.62 PK                | 74             | -27.38      | -60.87                  | -59.31                  | 8.37                   | -48.64           |
| 4   | 7250.14         | 38.03 AV                | 54             | -15.97      | -68.01                  | -69.29                  | 8.37                   | -57.23           |
| 5   | 21380.1         | 38.98 PK                | 74             | -35.02      | -67.46                  | -67.86                  | 8.37                   | -56.28           |
| 6   | 21380.1         | 27.9 AV                 | 54             | -26.1       | -81.06                  | -77.24                  | 8.37                   | -67.36           |
| 7   | 23968.6         | 39.92 PK                | 74             | -34.08      | -66.61                  | -66.83                  | 8.37                   | -55.34           |
| 8   | 23968.6         | 29.28 AV                | 54             | -24.72      | -79.97                  | -75.74                  | 8.37                   | -65.98           |
| 9   | 39573.16        | 34.61 PK                | 74             | -39.39      | -73.66                  | -70.85                  | 8.37                   | -60.65           |
| 10  | 39573.16        | 24.12 AV                | 54             | -29.88      | -85.96                  | -80.62                  | 8.37                   | -71.14           |

Note: Margin value = Emission Level - Limit value

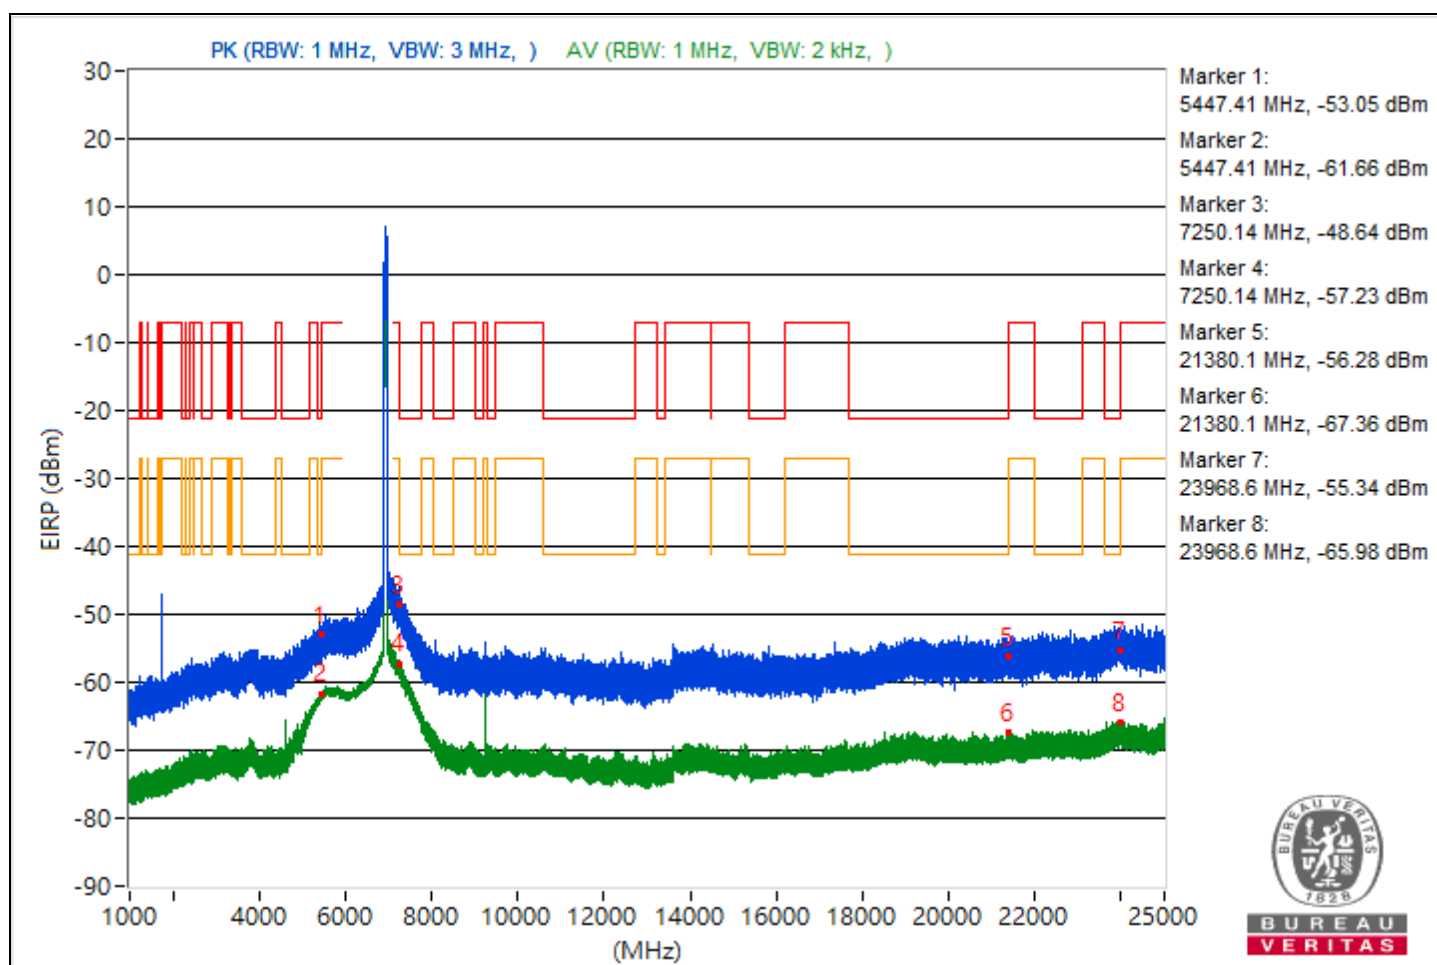

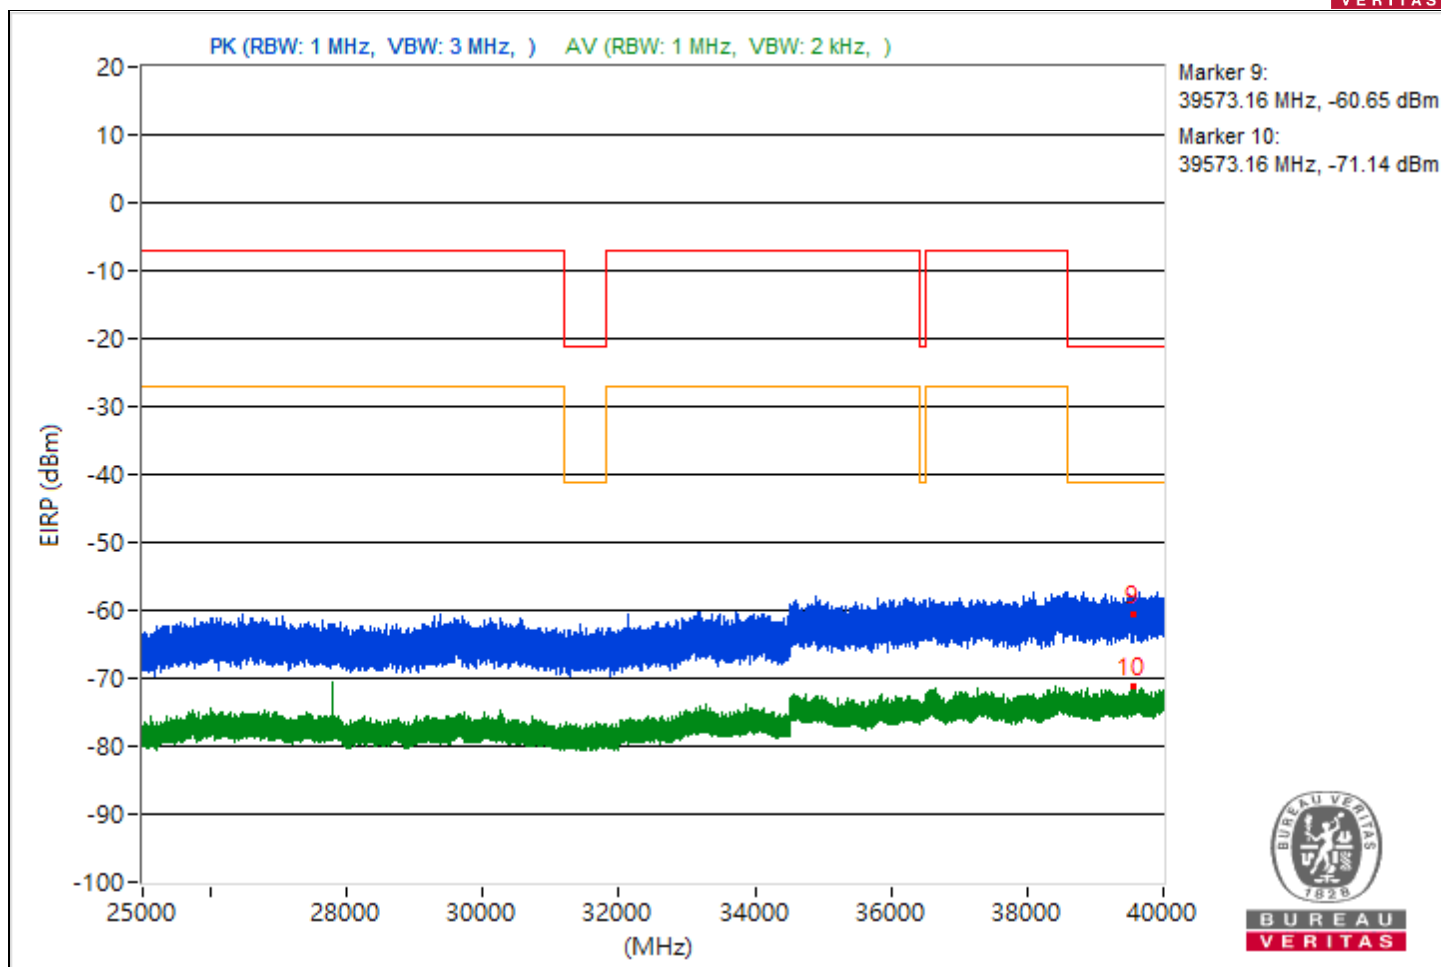



|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 215 : 7025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                       |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| 1   | 5451.3          | 40.93 PK                | 74             | -33.07      | -66.62                  | -64.96                  | 8.37                   | -54.33           |
| 2   | 5451.3          | 33.23 AV                | 54             | -20.77      | -73.73                  | -73.11                  | 8.37                   | -62.03           |
| 3   | 7258.16         | 45.55 PK                | 74             | -28.45      | -61.39                  | -60.8                   | 8.37                   | -49.71           |
| 4   | 7258.16         | 38.7 AV                 | 54             | -15.3       | -68.18                  | -67.72                  | 8.37                   | -56.56           |
| 5   | 19205.2         | 38.19 PK                | 74             | -35.81      | -68.82                  | -68.11                  | 8.37                   | -57.07           |
| 6   | 19205.2         | 27.7 AV                 | 54             | -26.3       | -78.21                  | -79.82                  | 8.37                   | -67.56           |
| 7   | 23993.8         | 39.62 PK                | 74             | -34.38      | -65.87                  | -68.59                  | 8.37                   | -55.64           |
| 8   | 23993.8         | 29.75 AV                | 54             | -24.25      | -76.12                  | -77.84                  | 8.37                   | -65.51           |
| 9   | 39553.69        | 33.64 PK                | 74             | -40.36      | -74.46                  | -71.92                  | 8.37                   | -61.62           |
| 10  | 39553.69        | 23.54 AV                | 54             | -30.46      | -86.32                  | -81.27                  | 8.37                   | -71.72           |

Note: Margin value = Emission Level - Limit value

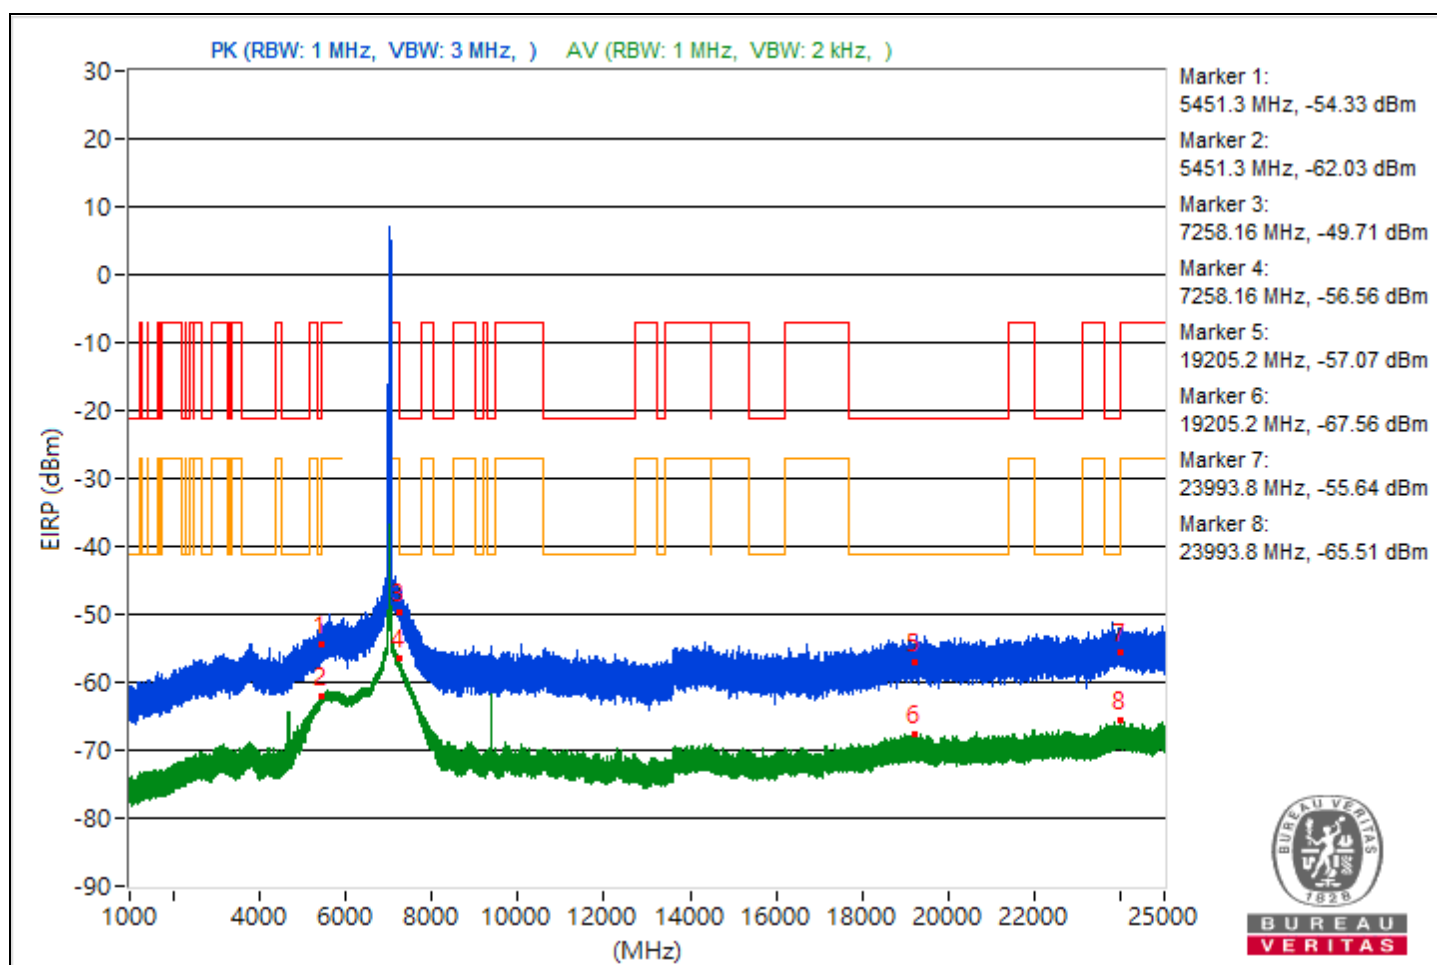


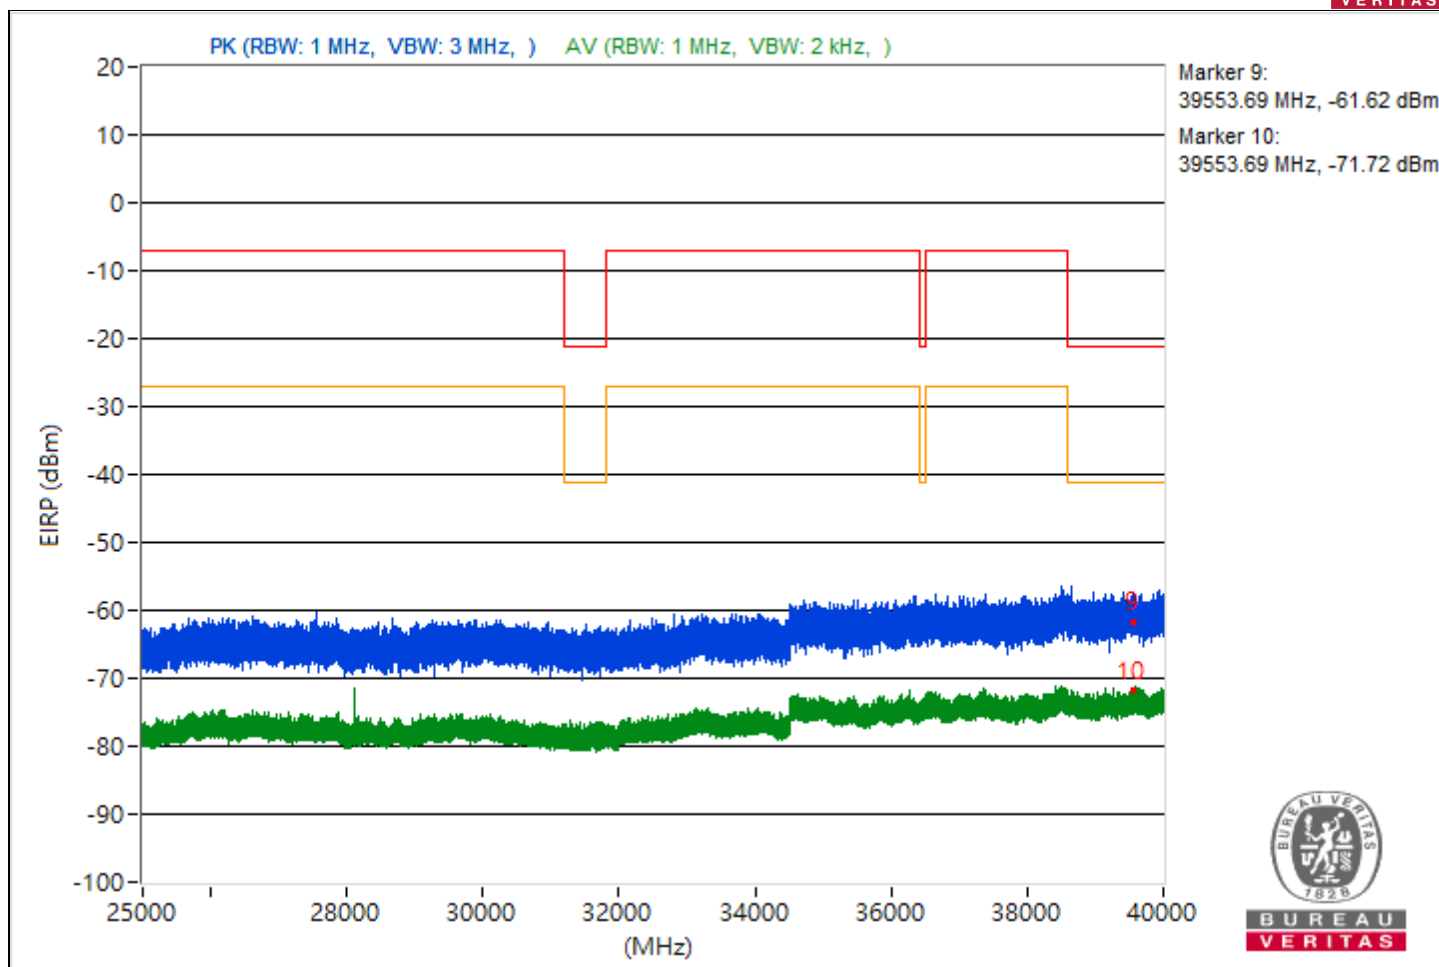


|                 |                                    |                          |                  |
|-----------------|------------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 15 : 6025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                     | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5457.44         | 43.14 PK                | 74             | -30.86      | -63.51                  | -63.49                  | 8.37                   | -52.12           |
| 2                            | 5457.44         | 35.8 AV                 | 54             | -18.2       | -70.79                  | -70.9                   | 8.37                   | -59.46           |
| 3                            | 8033.33         | 48 PK                   | 74             | -26         | -66.16                  | -56.03                  | 8.37                   | -47.26           |
| 4                            | 8033.33         | 47.39 AV                | 54             | -6.61       | -71.77                  | -56.36                  | 8.37                   | -47.87           |
| 5                            | 19098.6         | 39.62 PK                | 74             | -34.38      | -66.74                  | -67.31                  | 8.37                   | -55.64           |
| 6                            | 19098.6         | 26.44 AV                | 54             | -27.56      | -79.07                  | -81.72                  | 8.37                   | -68.82           |
| 7                            | 23907.6         | 39.46 PK                | 74             | -34.54      | -69.44                  | -65.71                  | 8.37                   | -55.8            |
| 8                            | 23907.6         | 27.59 AV                | 54             | -26.41      | -77.63                  | -81.18                  | 8.37                   | -67.67           |
| 9                            | 39668           | 32.15 PK                | 74             | -41.85      | -74.05                  | -74.99                  | 8.37                   | -63.11           |
| 10                           | 39668           | 21.33 AV                | 54             | -32.67      | -84.35                  | -86.55                  | 8.37                   | -73.93           |

Note: Margin value = Emission Level - Limit value

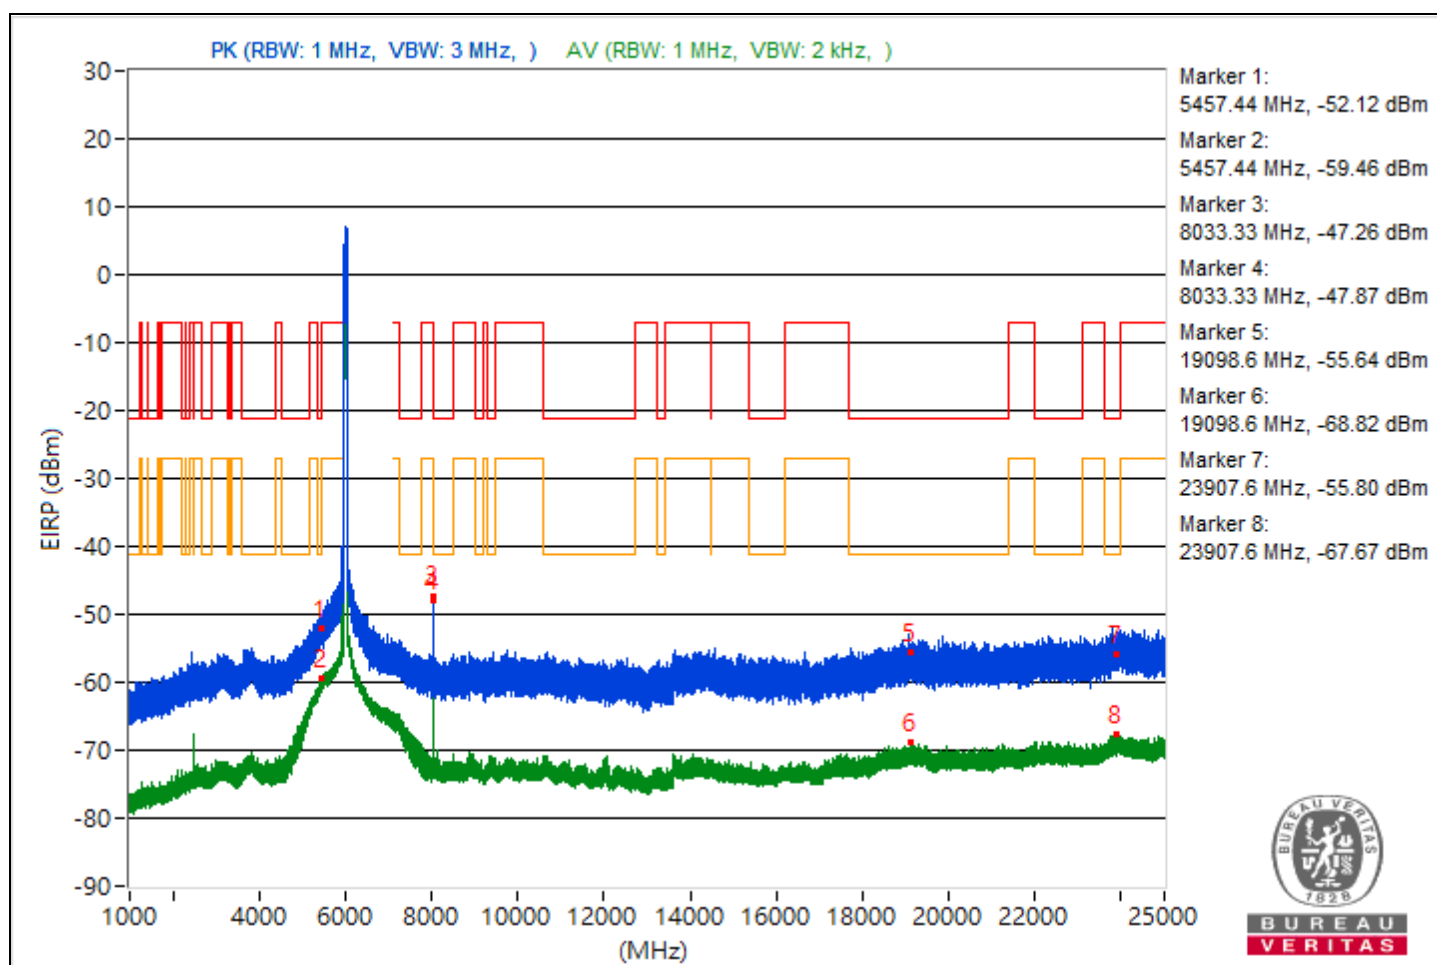

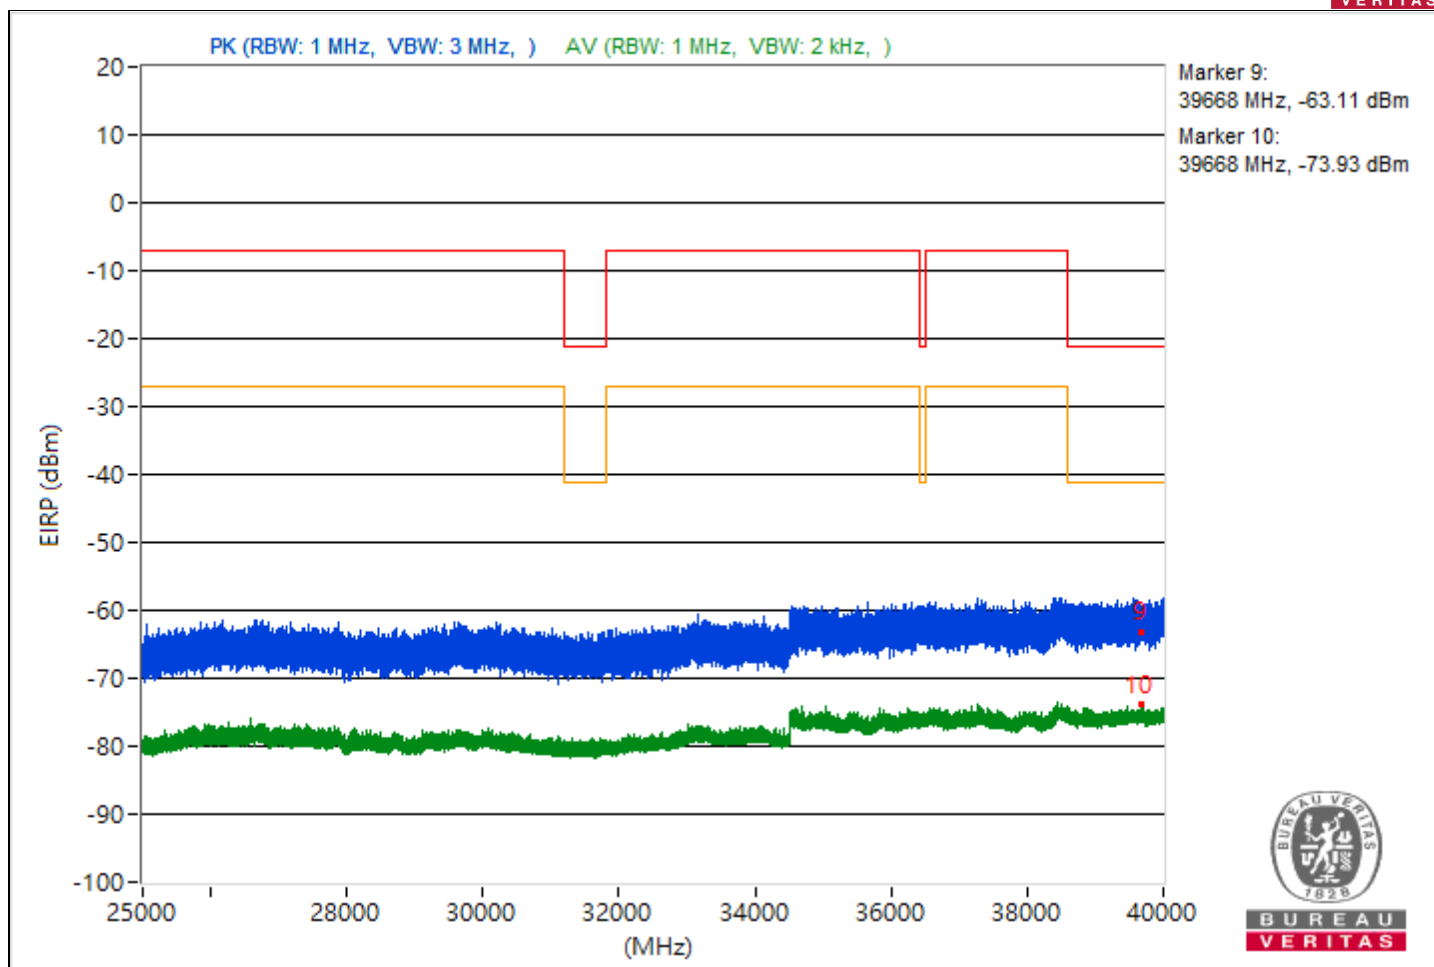



|                 |                                    |                          |                  |
|-----------------|------------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 79 : 6345 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                     | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                        |                          |                  |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| 1   | 5450.29         | 41.91 PK                | 74             | -32.09      | -64.34                  | -65.16                  | 8.37                   | -53.35           |
| 2   | 5450.29         | 33.56 AV                | 54             | -20.44      | -73.86                  | -72.42                  | 8.37                   | -61.7            |
| 3   | 8460.09         | 43.46 PK                | 74             | -30.54      | -67.52                  | -61.05                  | 8.37                   | -51.8            |
| 4   | 8460.09         | 40.91 AV                | 54             | -13.09      | -72.35                  | -63.22                  | 8.37                   | -54.35           |
| 5   | 21066.3         | 38.71 PK                | 74             | -35.29      | -68                     | -67.85                  | 8.37                   | -56.55           |
| 6   | 21066.3         | 26.2 AV                 | 54             | -27.8       | -78.66                  | -83.52                  | 8.37                   | -69.06           |
| 7   | 23772.9         | 38.84 PK                | 74             | -35.16      | -69.45                  | -66.6                   | 8.37                   | -56.42           |
| 8   | 23772.9         | 27.16 AV                | 54             | -26.84      | -78.41                  | -80.89                  | 8.37                   | -68.1            |
| 9   | 39589.96        | 35.14 PK                | 74             | -38.86      | -71.85                  | -71.17                  | 8.37                   | -60.12           |
| 10  | 39589.96        | 21.08 AV                | 54             | -32.92      | -87.53                  | -84.21                  | 8.37                   | -74.18           |

Note: Margin value = Emission Level - Limit value

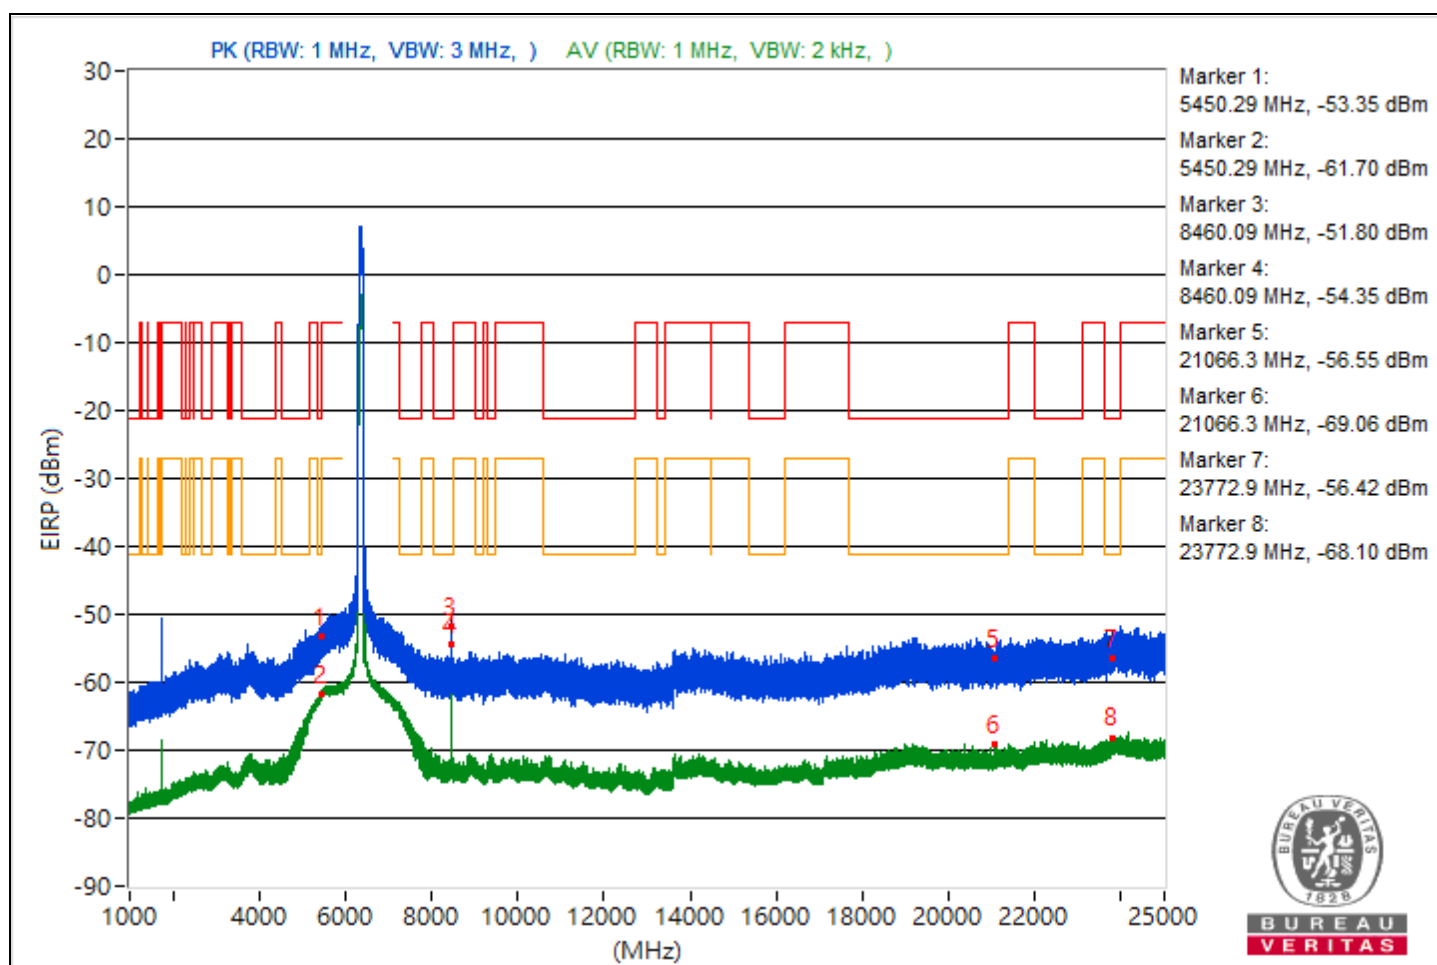

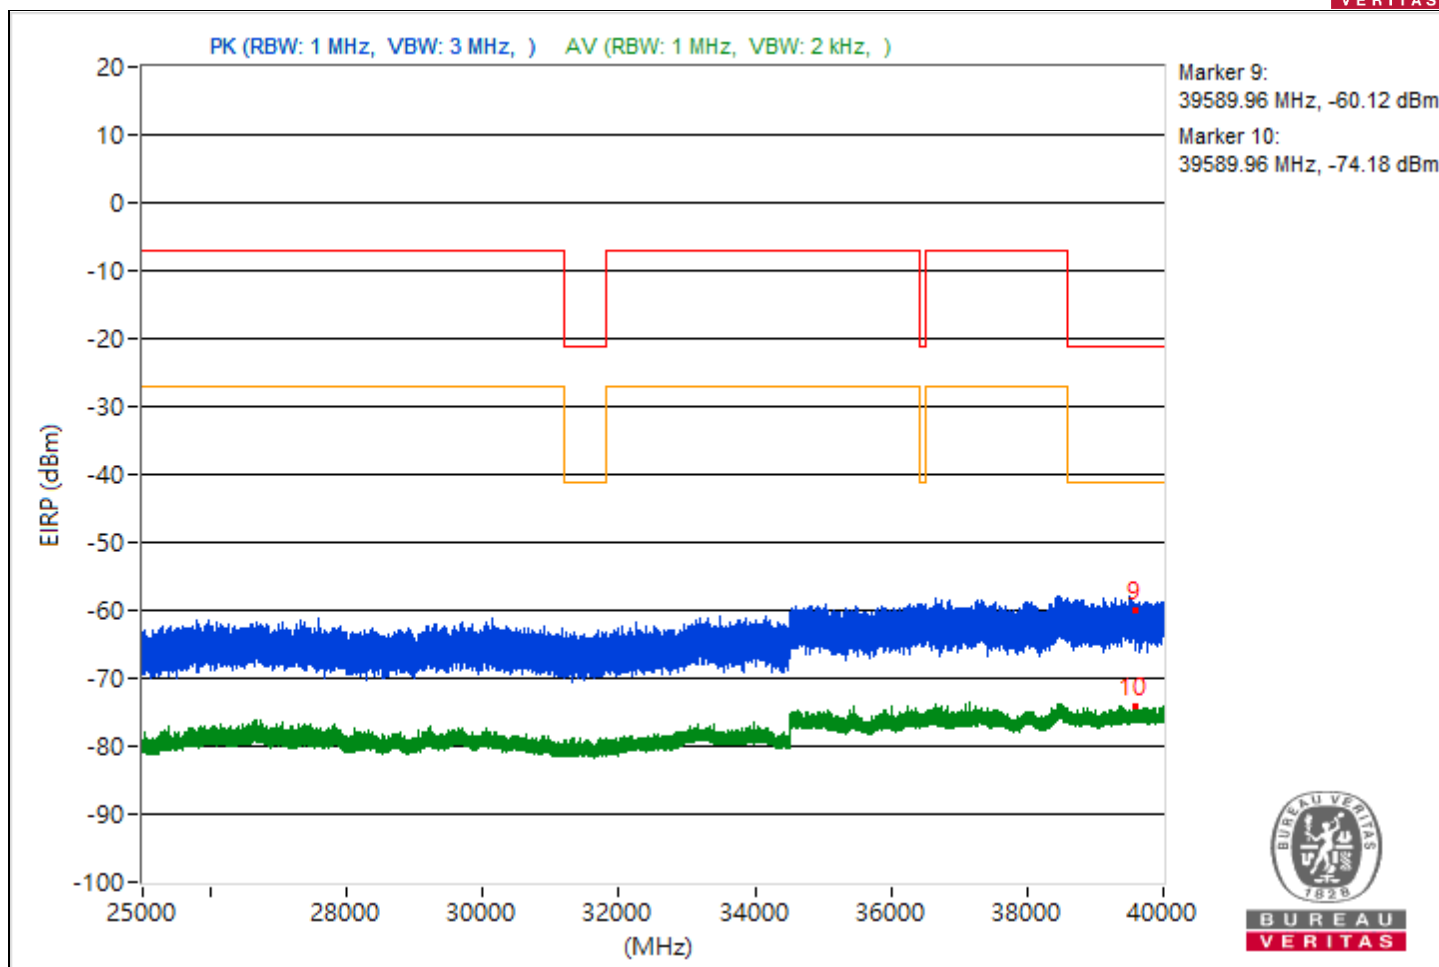



|                 |                                    |                          |                   |
|-----------------|------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 111 : 6505 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                     | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                        |                          |                   |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| 1   | 5457.21         | 41.72 PK                | 74             | -32.28      | -66.1                   | -64                     | 8.37                   | -53.54           |
| 2   | 5457.21         | 33.59 AV                | 54             | -20.41      | -72.67                  | -73.46                  | 8.37                   | -61.67           |
| 3   | 7254.19         | 41.34 PK                | 74             | -32.66      | -64.15                  | -66.86                  | 8.37                   | -53.92           |
| 4   | 7254.19         | 32.61 AV                | 54             | -21.39      | -74.36                  | -73.72                  | 8.37                   | -62.65           |
| 5   | 19031.1         | 38.42 PK                | 74             | -35.58      | -68.37                  | -68.08                  | 8.37                   | -56.84           |
| 6   | 19031.1         | 26.93 AV                | 54             | -27.07      | -78.65                  | -81.11                  | 8.37                   | -68.33           |
| 7   | 23814           | 40.03 PK                | 74             | -33.97      | -66.67                  | -66.55                  | 8.37                   | -55.23           |
| 8   | 23814           | 28.18 AV                | 54             | -25.82      | -76.84                  | -81.08                  | 8.37                   | -67.08           |
| 9   | 39831.82        | 33.08 PK                | 74             | -40.92      | -73.12                  | -74.05                  | 8.37                   | -62.18           |
| 10  | 39831.82        | 22.14 AV                | 54             | -31.86      | -86.48                  | -83.15                  | 8.37                   | -73.12           |

Note: Margin value = Emission Level - Limit value

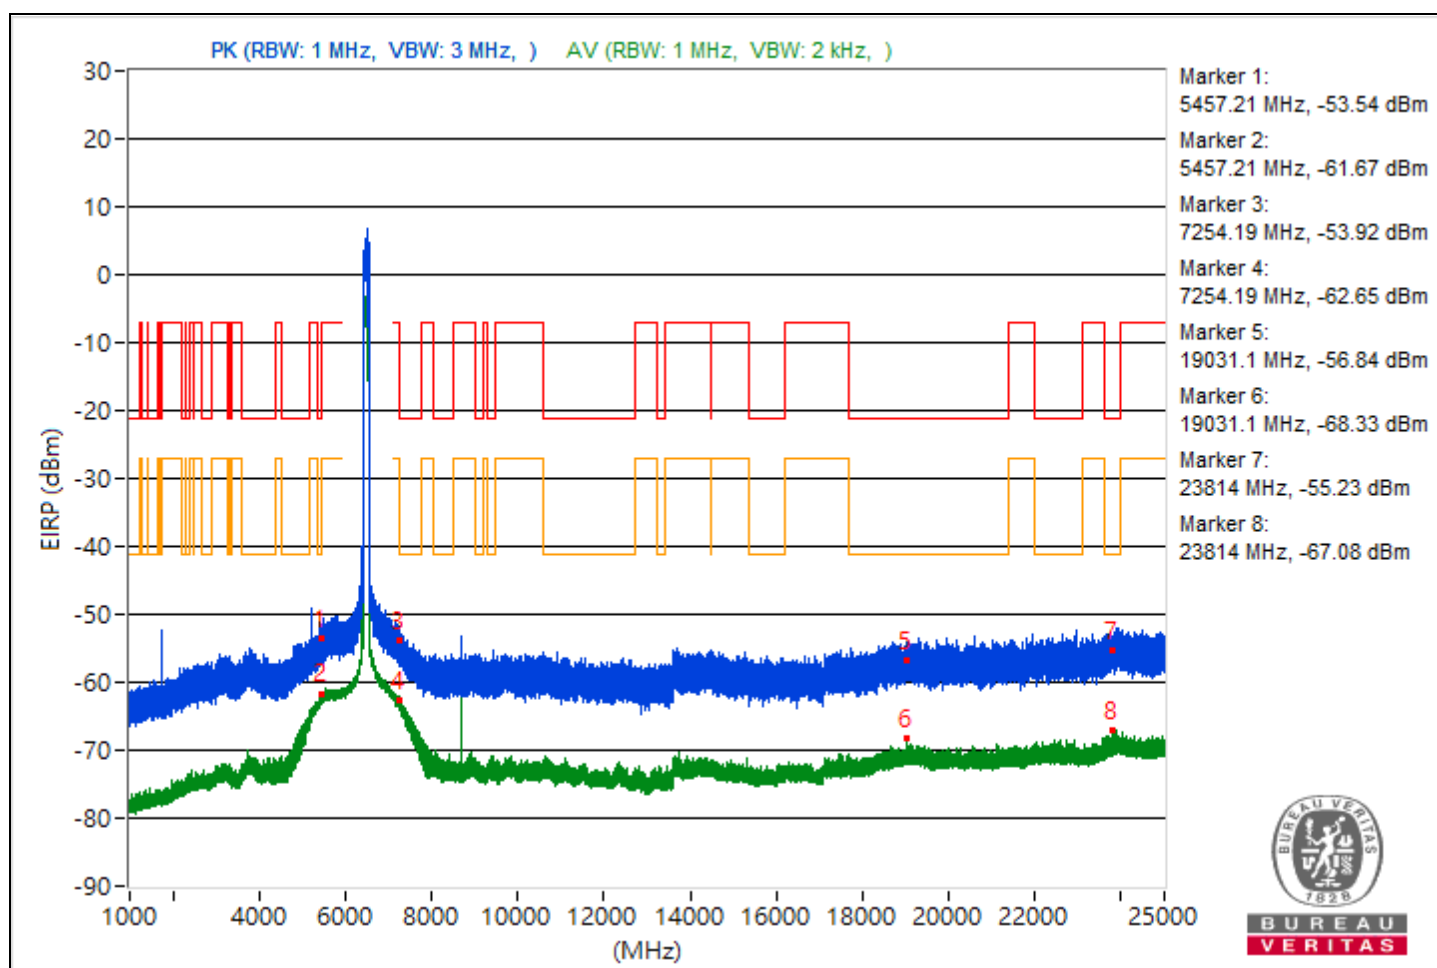


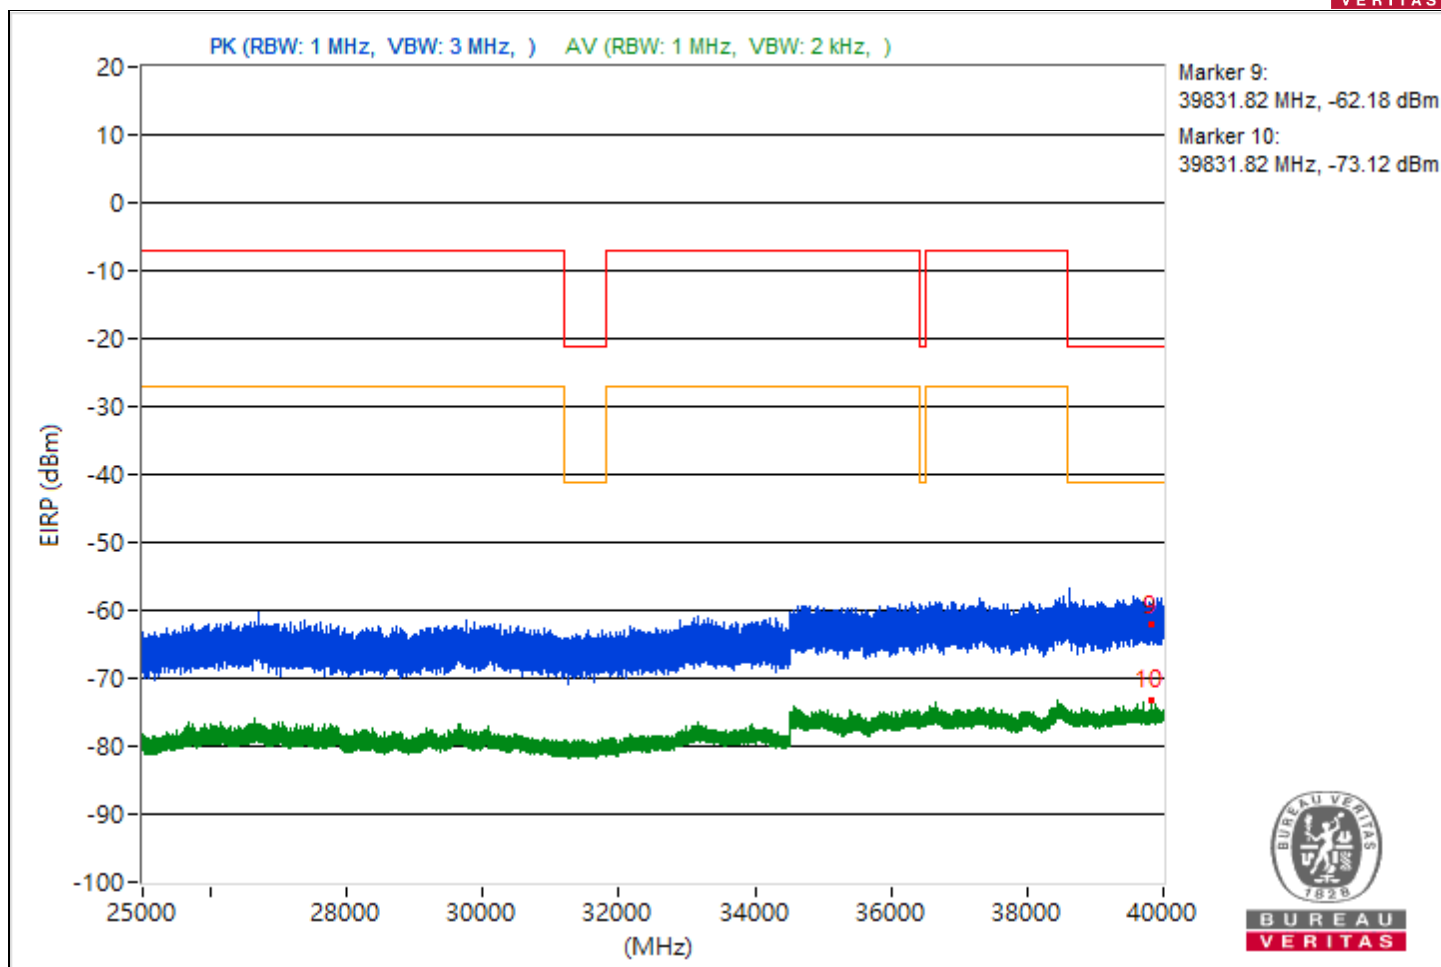


|                 |                                    |                          |                   |
|-----------------|------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                     | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5439.56         | 40.23 PK                | 74             | -33.77      | -66.7                   | -66.14                  | 8.37                   | -55.03           |
| 2                            | 5439.56         | 32.9 AV                 | 54             | -21.1       | -73.15                  | -74.42                  | 8.37                   | -62.36           |
| 3                            | 7254.89         | 40.16 PK                | 74             | -33.84      | -65.52                  | -67.71                  | 8.37                   | -55.1            |
| 4                            | 7254.89         | 33.59 AV                | 54             | -20.41      | -72.73                  | -73.4                   | 8.37                   | -61.67           |
| 5                            | 21041.9         | 36.73 PK                | 74             | -37.27      | -71.55                  | -68.71                  | 8.37                   | -58.53           |
| 6                            | 21041.9         | 26.28 AV                | 54             | -27.72      | -82.64                  | -78.87                  | 8.37                   | -68.98           |
| 7                            | 23781.1         | 39.02 PK                | 74             | -34.98      | -66.24                  | -69.67                  | 8.37                   | -56.24           |
| 8                            | 23781.1         | 27.76 AV                | 54             | -26.24      | -81.12                  | -77.41                  | 8.37                   | -67.5            |
| 9                            | 38679.47        | 32.53 PK                | 74             | -41.47      | -77.09                  | -72.36                  | 8.37                   | -62.73           |
| 10                           | 38679.47        | 21.4 AV                 | 54             | -32.6       | -83.94                  | -87.09                  | 8.37                   | -73.86           |

Note: Margin value = Emission Level - Limit value

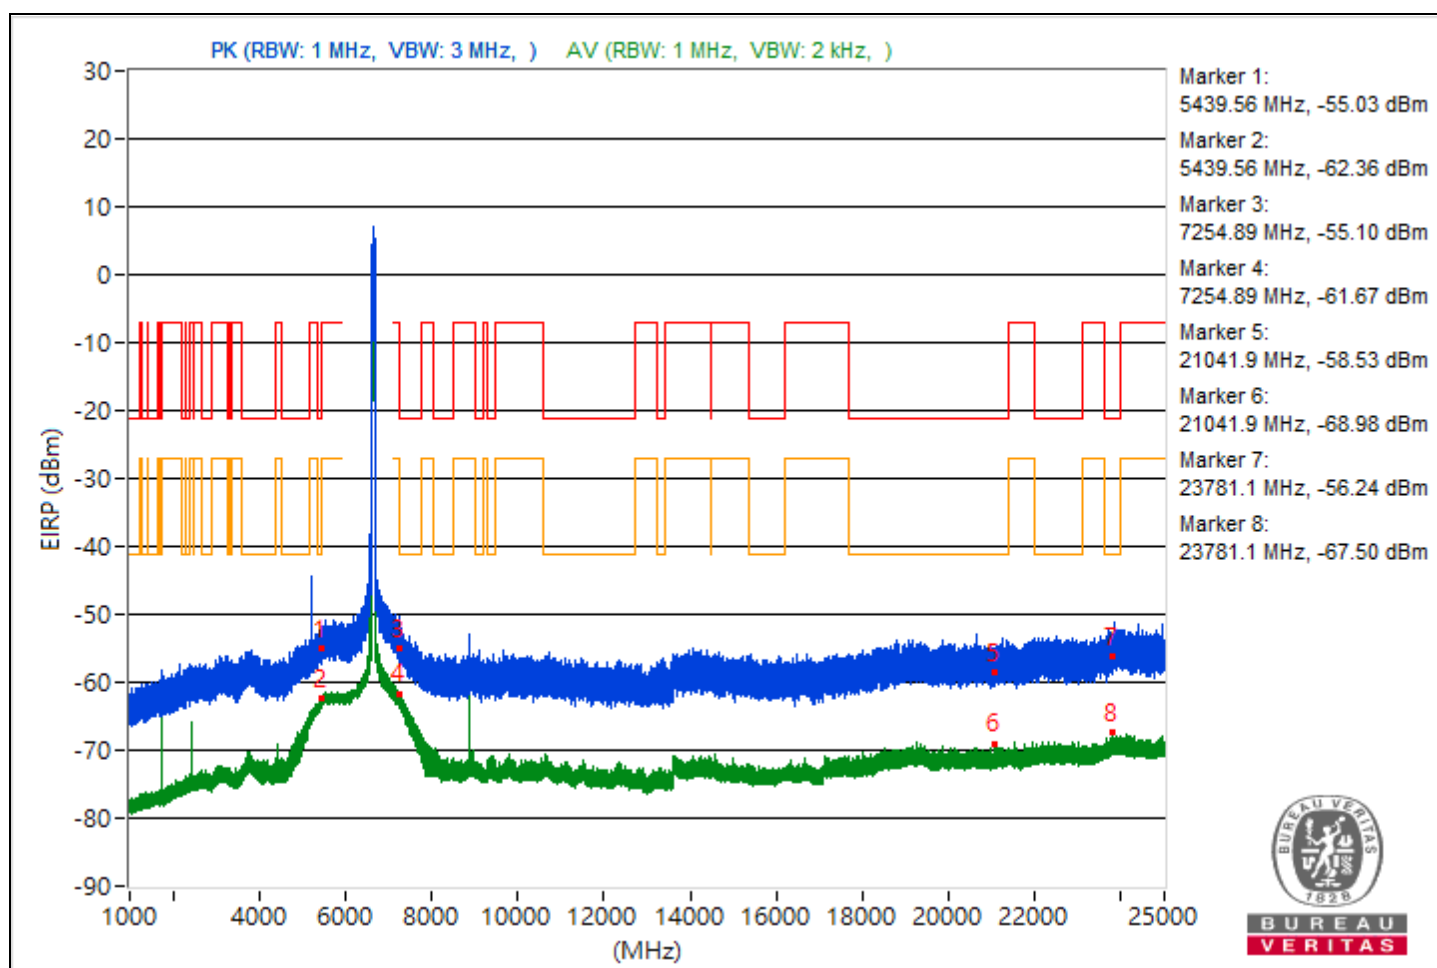


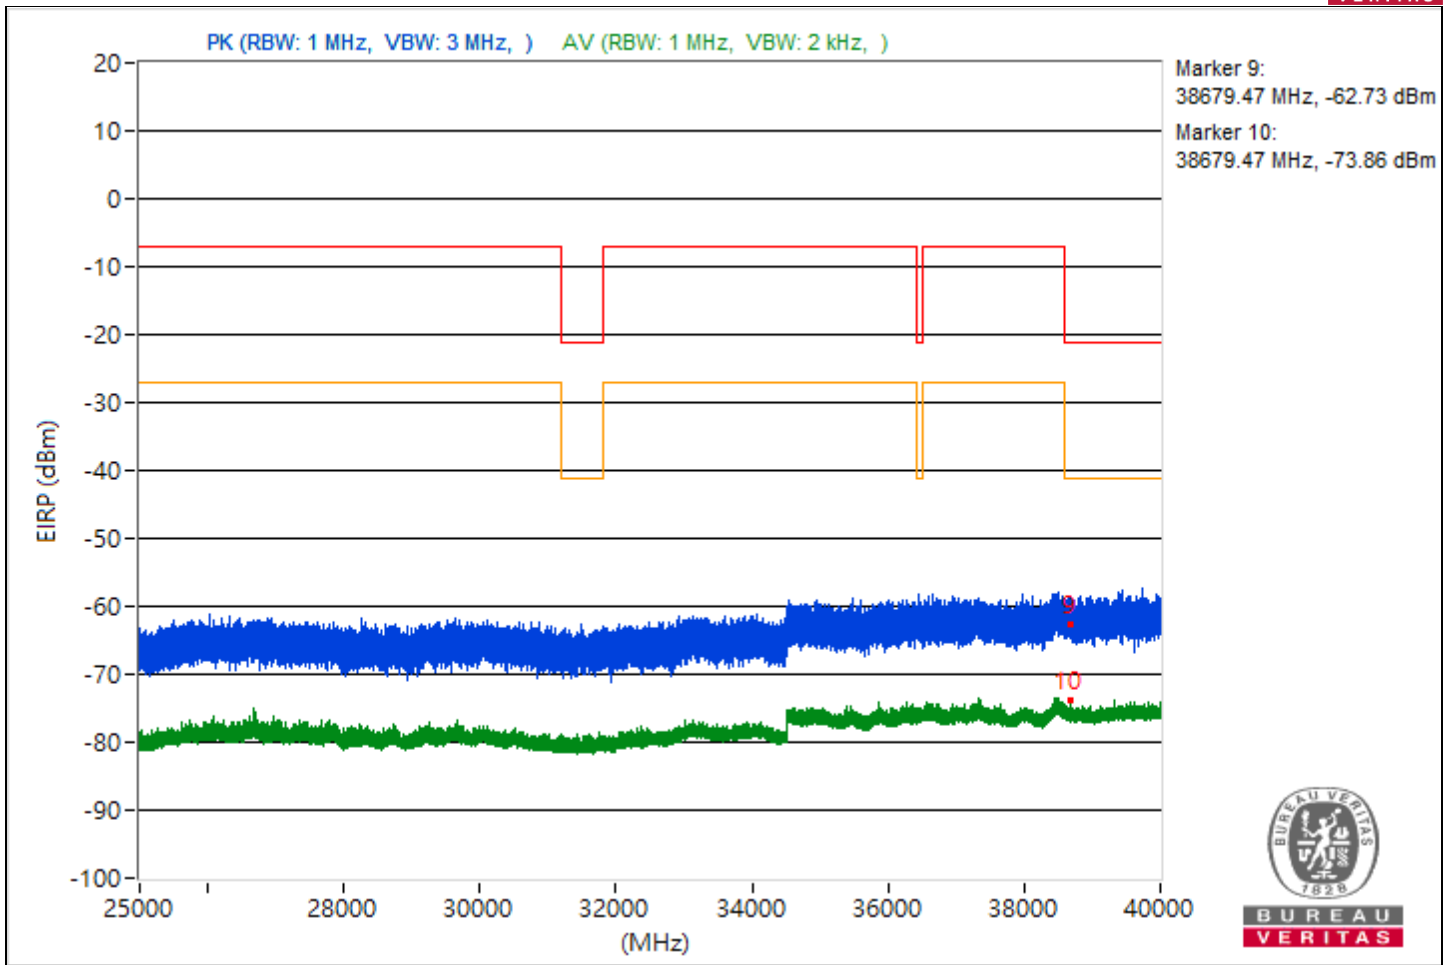


|                 |                                    |                          |                   |
|-----------------|------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 175 : 6825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                     | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                        |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5446.48         | 42.68 PK                | 74             | -31.32      | -63.48                  | -64.49                  | 8.37                   | -52.58           |
| 2                            | 5446.48         | 33.88 AV                | 54             | -20.12      | -72.87                  | -72.65                  | 8.37                   | -61.38           |
| 3                            | 7258.93         | 43.69 PK                | 74             | -30.31      | -63.31                  | -62.63                  | 8.37                   | -51.57           |
| 4                            | 7258.93         | 36.22 AV                | 54             | -17.78      | -70.07                  | -70.79                  | 8.37                   | -59.04           |
| 5                            | 19259.6         | 37.17 PK                | 74             | -36.83      | -69.91                  | -69.07                  | 8.37                   | -58.09           |
| 6                            | 19259.6         | 26.78 AV                | 54             | -27.22      | -82.66                  | -78.17                  | 8.37                   | -68.48           |
| 7                            | 23939.3         | 40.52 PK                | 74             | -33.48      | -66.67                  | -65.63                  | 8.37                   | -54.74           |
| 8                            | 23939.3         | 27.92 AV                | 54             | -26.08      | -77.14                  | -81.23                  | 8.37                   | -67.34           |
| 9                            | 39698.84        | 33.14 PK                | 74             | -40.86      | -73.37                  | -73.64                  | 8.37                   | -62.12           |
| 10                           | 39698.84        | 20.93 AV                | 54             | -33.07      | -84.49                  | -87.41                  | 8.37                   | -74.33           |

Note: Margin value = Emission Level - Limit value

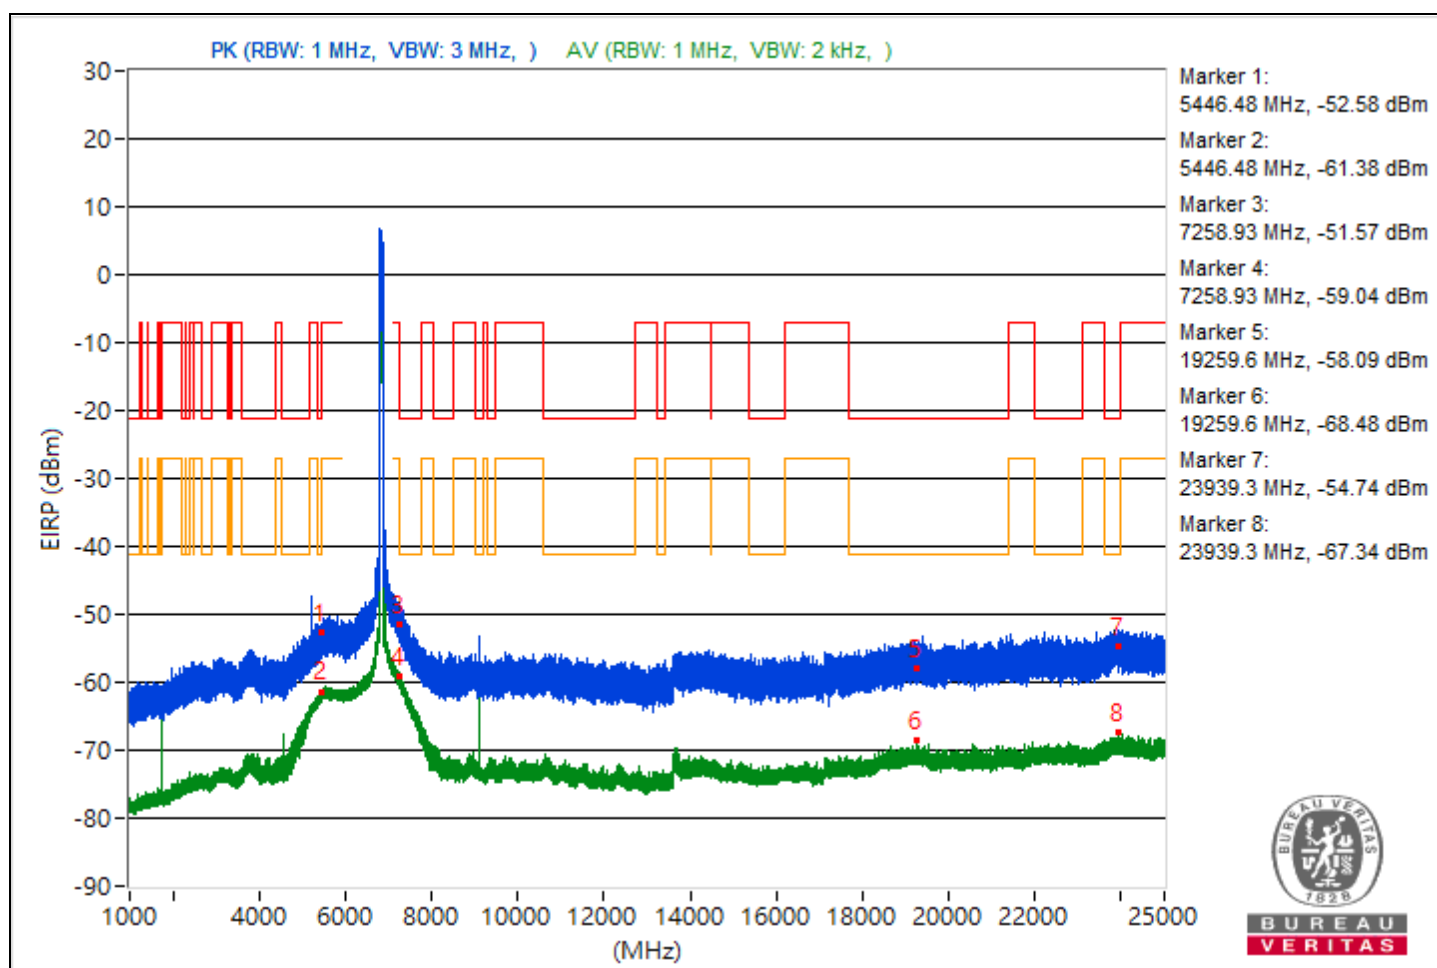

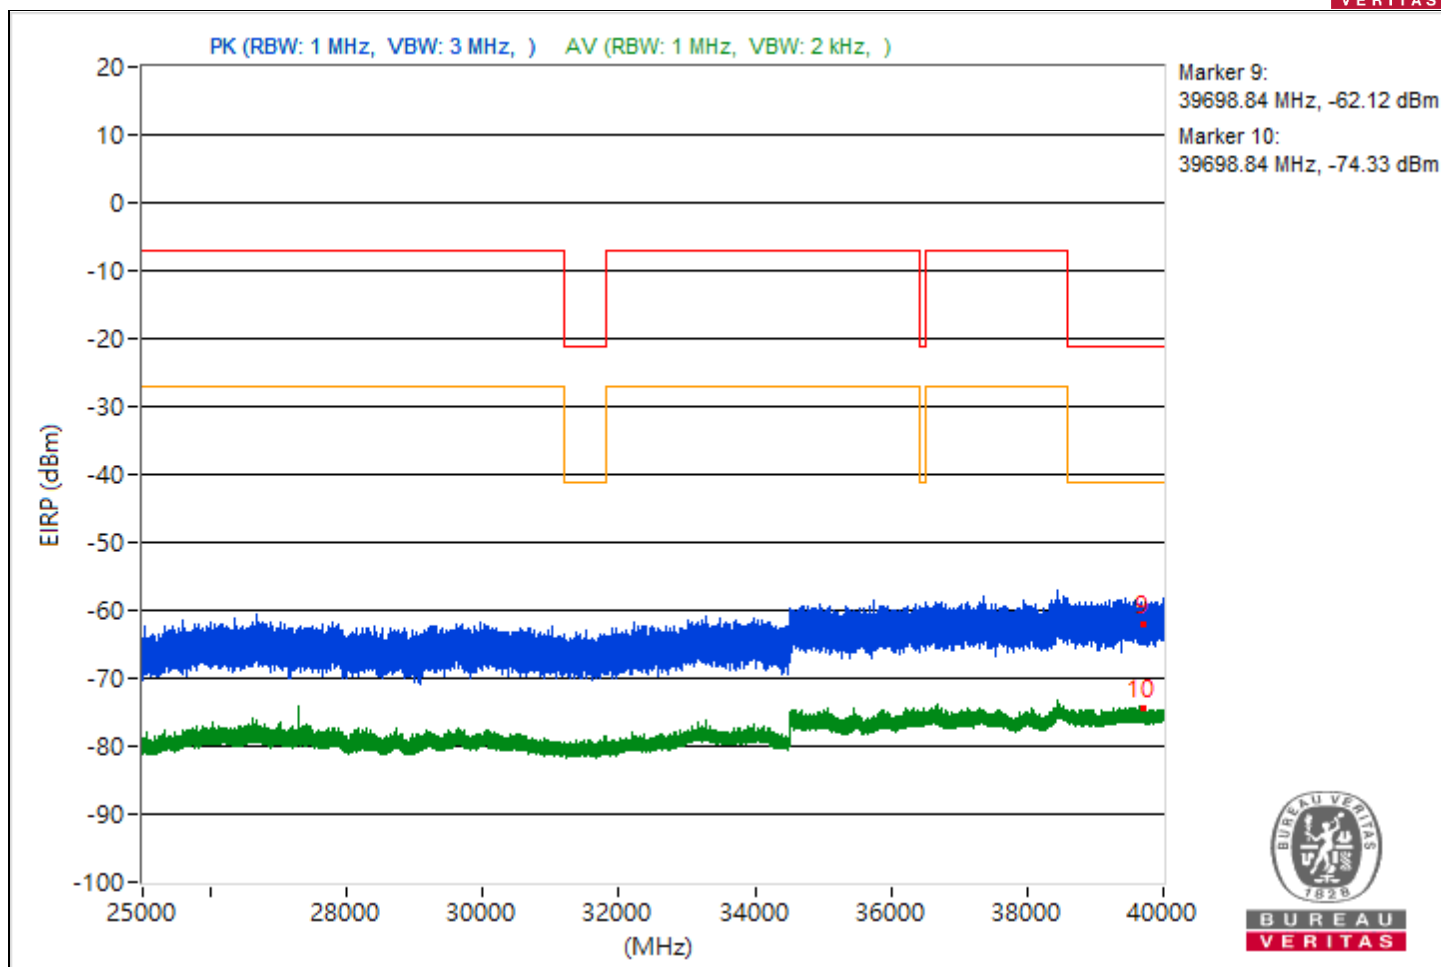



|                 |                                    |                          |                   |
|-----------------|------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 207 : 6985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                     | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                        |                          |                   |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| 1   | 4656.57         | 39.46 PK                | 74             | -34.54      | -69.6                   | -65.64                  | 8.37                   | -55.8            |
| 2   | 4656.57         | 31.3 AV                 | 54             | -22.7       | -83.27                  | -72.69                  | 8.37                   | -63.96           |
| 3   | 7253.1          | 43.33 PK                | 74             | -30.67      | -62.11                  | -64.96                  | 8.37                   | -51.93           |
| 4   | 7253.1          | 35.93 AV                | 54             | -18.07      | -70.4                   | -71.03                  | 8.37                   | -59.33           |
| 5   | 19315.1         | 38.44 PK                | 74             | -35.56      | -69.1                   | -67.46                  | 8.37                   | -56.82           |
| 6   | 19315.1         | 26.05 AV                | 54             | -27.95      | -79.19                  | -82.69                  | 8.37                   | -69.21           |
| 7   | 23963           | 40.75 PK                | 74             | -33.25      | -64.85                  | -67.25                  | 8.37                   | -54.51           |
| 8   | 23963           | 27.39 AV                | 54             | -26.61      | -78.1                   | -80.82                  | 8.37                   | -67.87           |
| 9   | 39708.98        | 34.76 PK                | 74             | -39.24      | -72.53                  | -71.32                  | 8.37                   | -60.5            |
| 10  | 39708.98        | 21.52 AV                | 54             | -32.48      | -86.95                  | -83.84                  | 8.37                   | -73.74           |

Note: Margin value = Emission Level - Limit value

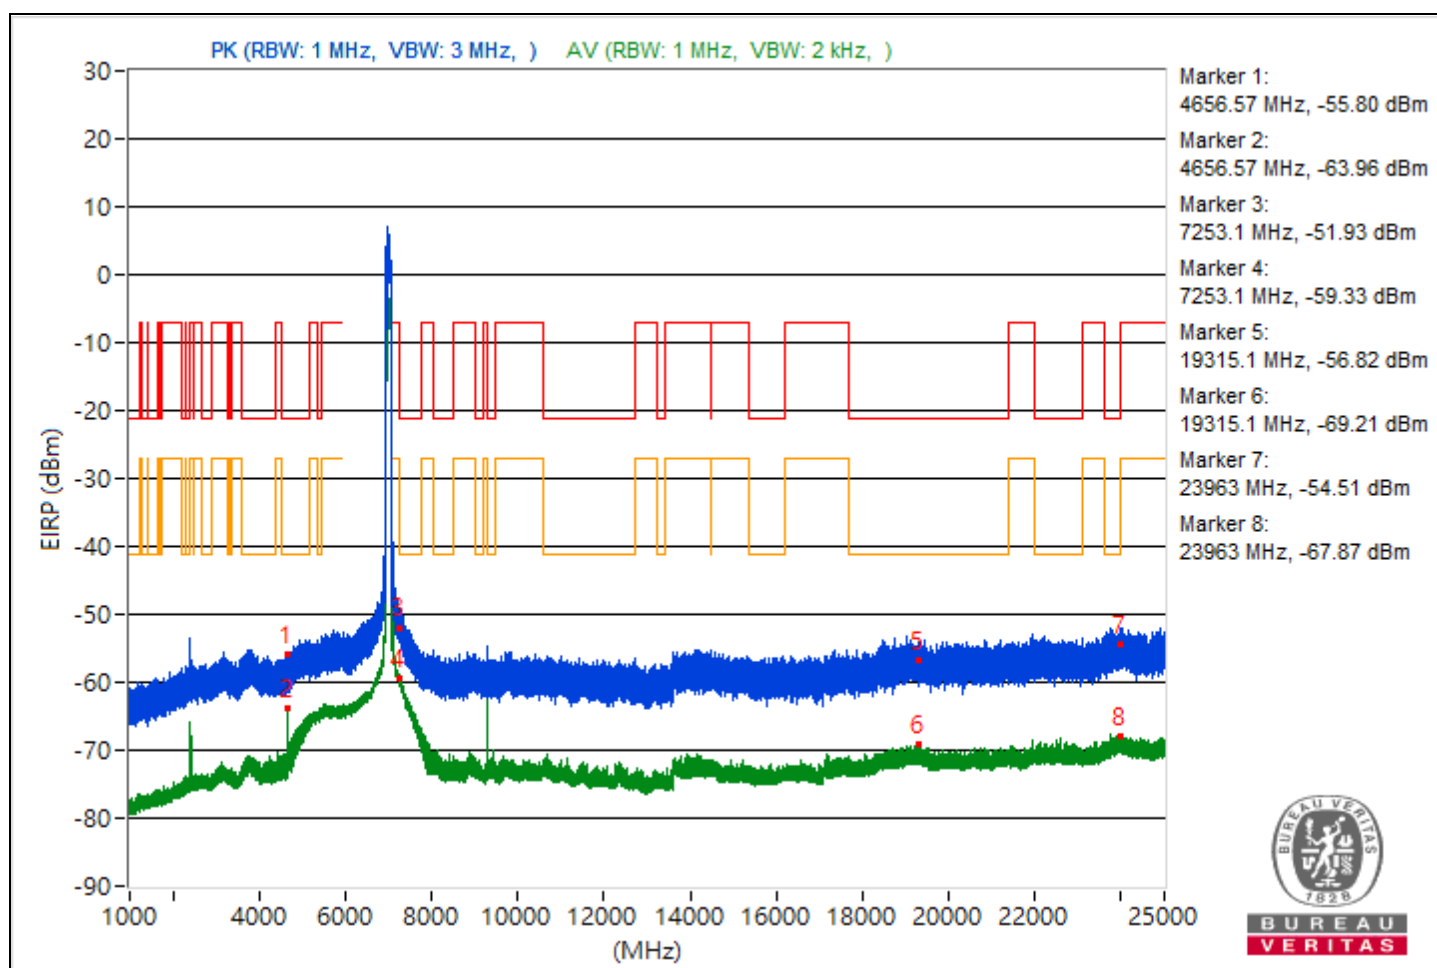


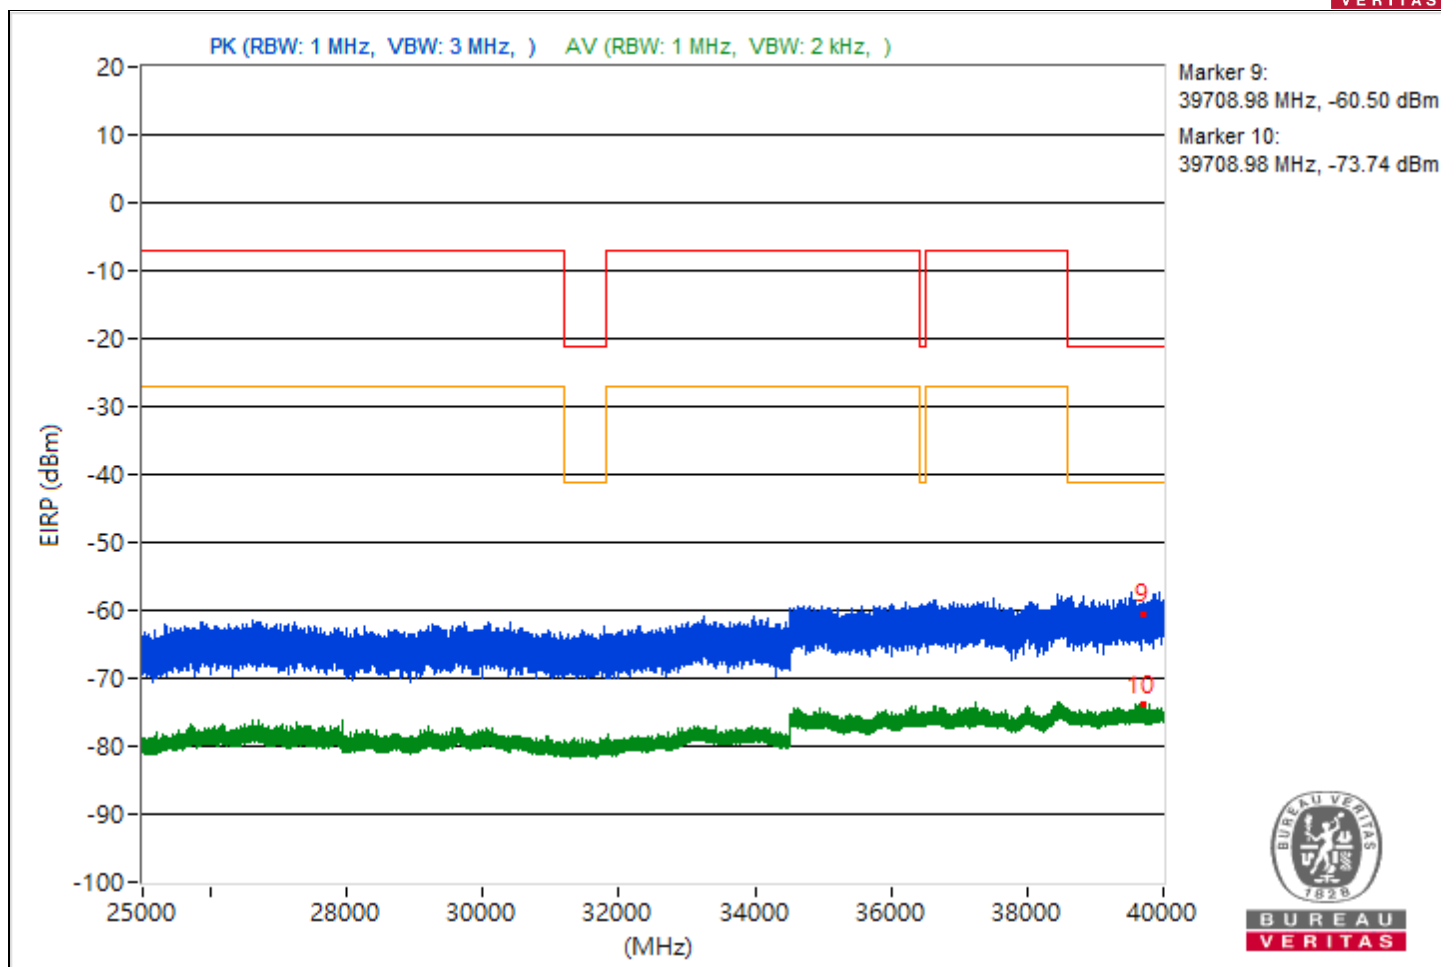


|                 |                                        |                          |                  |
|-----------------|----------------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 15 : 6025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                         | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                            |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5453.4          | 42.36 PK                | 74             | -31.64      | -64.25                  | -64.31                  | 8.37                   | -52.9            |
| 2                            | 5453.4          | 35.46 AV                | 54             | -18.54      | -71.08                  | -71.29                  | 8.37                   | -59.8            |
| 3                            | 8033.33         | 47.24 PK                | 74             | -26.76      | -68.2                   | -56.69                  | 8.37                   | -48.02           |
| 4                            | 8033.33         | 46.45 AV                | 54             | -7.55       | -72.71                  | -57.3                   | 8.37                   | -48.81           |
| 5                            | 21279.8         | 38.35 PK                | 74             | -35.65      | -67.93                  | -68.69                  | 8.37                   | -56.91           |
| 6                            | 21279.8         | 25.67 AV                | 54             | -28.33      | -83.09                  | -79.55                  | 8.37                   | -69.59           |
| 7                            | 23937.6         | 39.27 PK                | 74             | -34.73      | -69.01                  | -66.19                  | 8.37                   | -55.99           |
| 8                            | 23937.6         | 27.16 AV                | 54             | -26.84      | -78.52                  | -80.73                  | 8.37                   | -68.1            |
| 9                            | 39309.51        | 34.17 PK                | 74             | -39.83      | -74                     | -71.34                  | 8.37                   | -61.09           |
| 10                           | 39309.51        | 20.91 AV                | 54             | -33.09      | -86.77                  | -84.9                   | 8.37                   | -74.35           |

Note: Margin value = Emission Level - Limit value

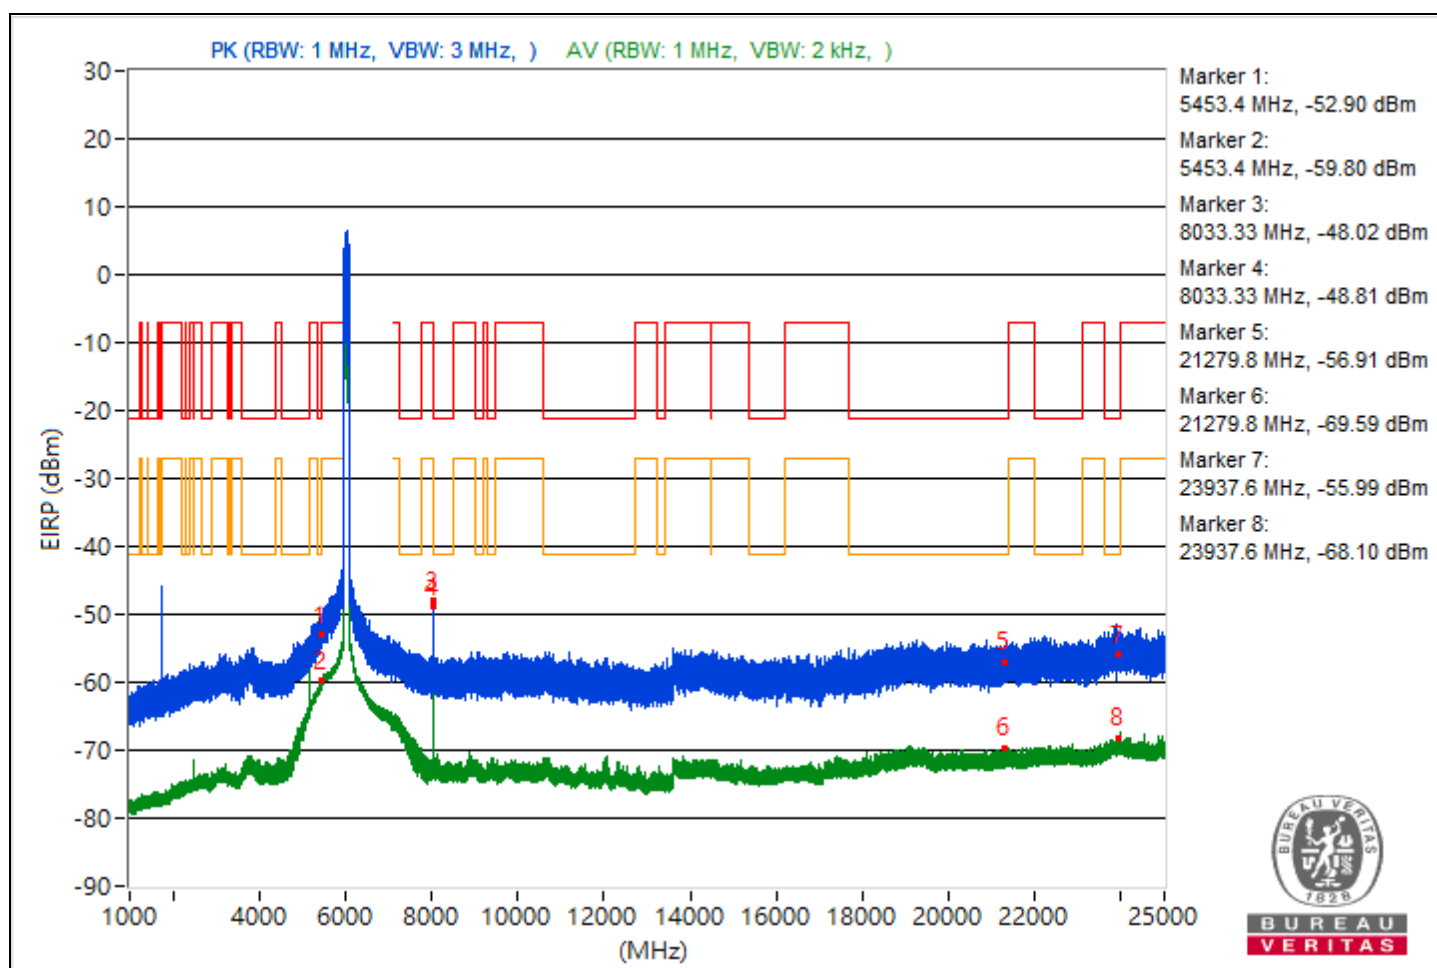


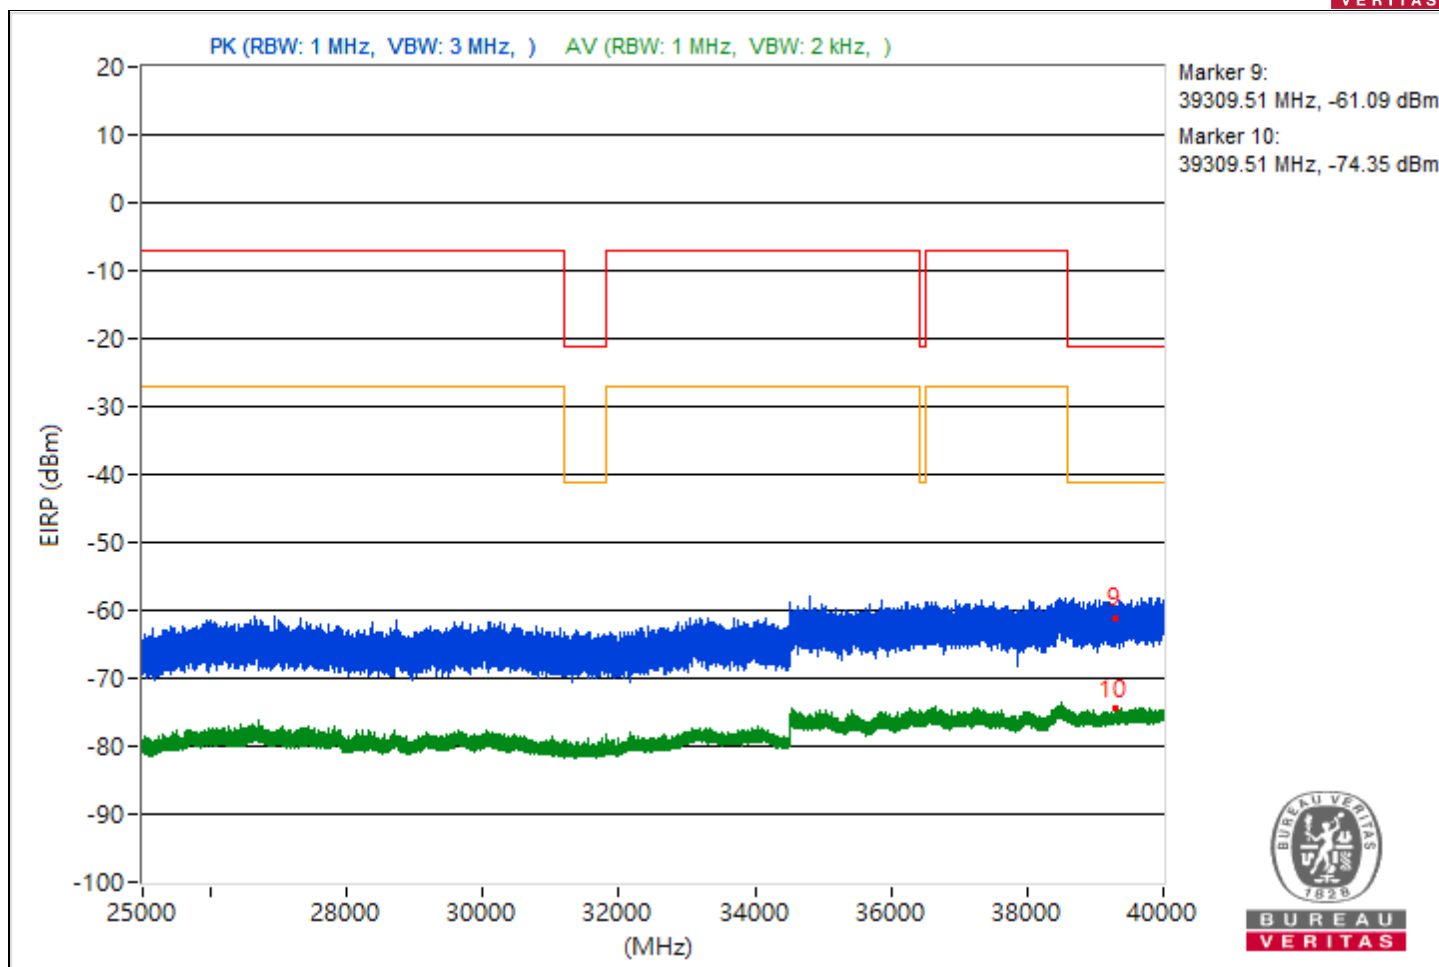


|                 |                                        |                          |                  |
|-----------------|----------------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 79 : 6345 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                         | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                            |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5443.6          | 40.9 PK                 | 74             | -33.1       | -65.91                  | -65.58                  | 8.37                   | -54.36           |
| 2                            | 5443.6          | 33.79 AV                | 54             | -20.21      | -72.7                   | -73                     | 8.37                   | -61.47           |
| 3                            | 8460            | 43.95 PK                | 74             | -30.05      | -68.77                  | -60.25                  | 8.37                   | -51.31           |
| 4                            | 8460            | 40.82 AV                | 54             | -13.18      | -72.7                   | -63.28                  | 8.37                   | -54.44           |
| 5                            | 19482.5         | 38.04 PK                | 74             | -35.96      | -67                     | -71.16                  | 8.37                   | -57.22           |
| 6                            | 19482.5         | 25.92 AV                | 54             | -28.08      | -83.15                  | -79.17                  | 8.37                   | -69.34           |
| 7                            | 23976.5         | 40.94 PK                | 74             | -33.06      | -64.51                  | -67.33                  | 8.37                   | -54.32           |
| 8                            | 23976.5         | 27.14 AV                | 54             | -26.86      | -81                     | -78.38                  | 8.37                   | -68.12           |
| 9                            | 38622.13        | 33.07 PK                | 74             | -40.93      | -73.13                  | -74.06                  | 8.37                   | -62.19           |
| 10                           | 38622.13        | 21.11 AV                | 54             | -32.89      | -84.35                  | -87.16                  | 8.37                   | -74.15           |

Note: Margin value = Emission Level - Limit value

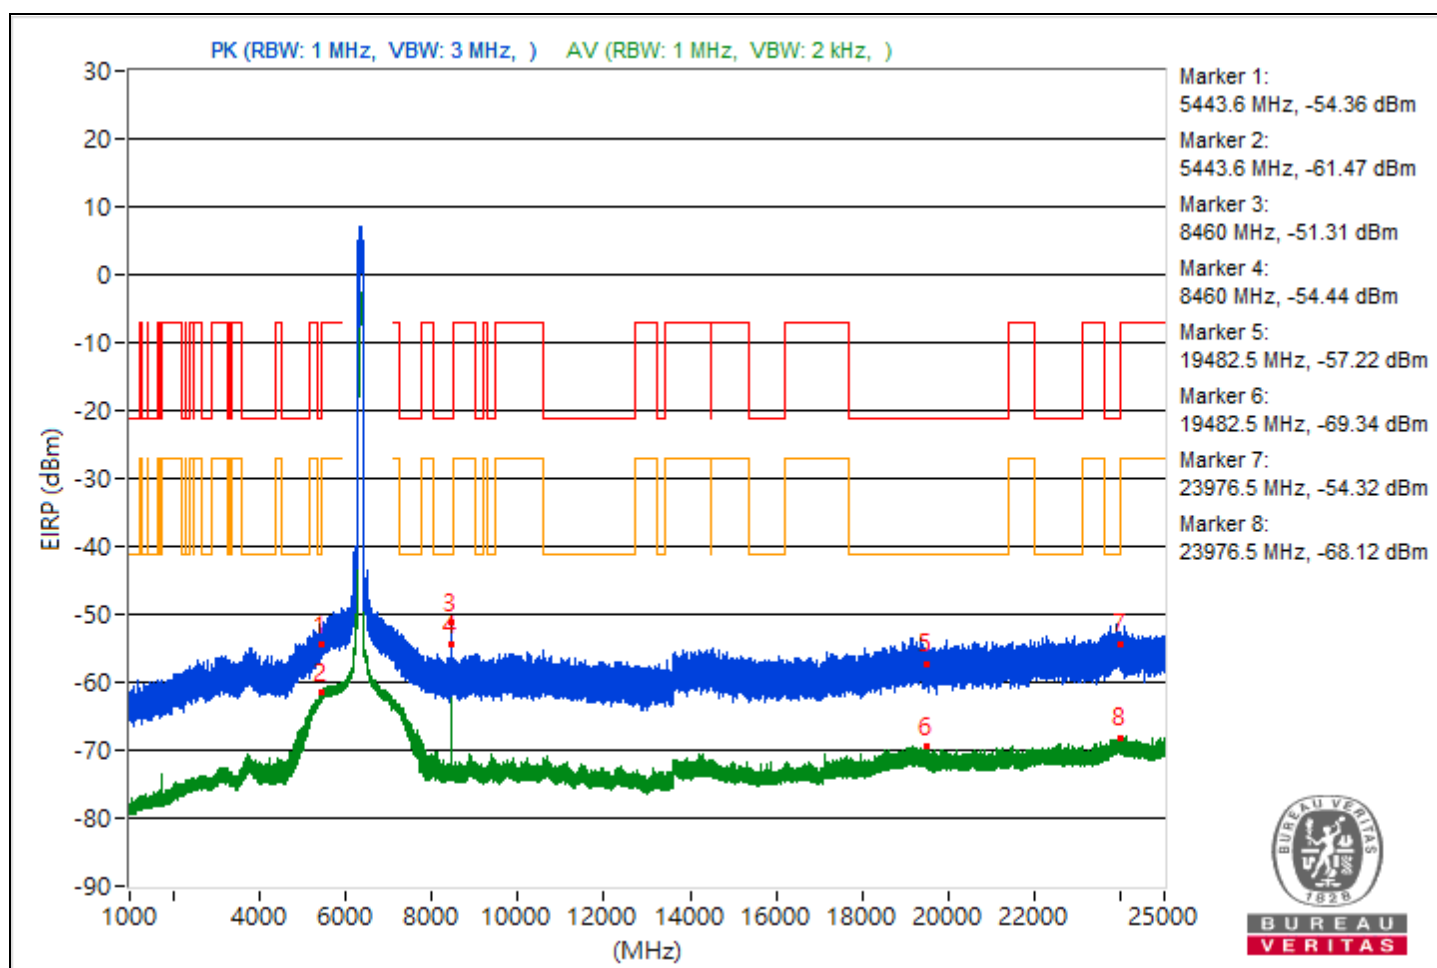

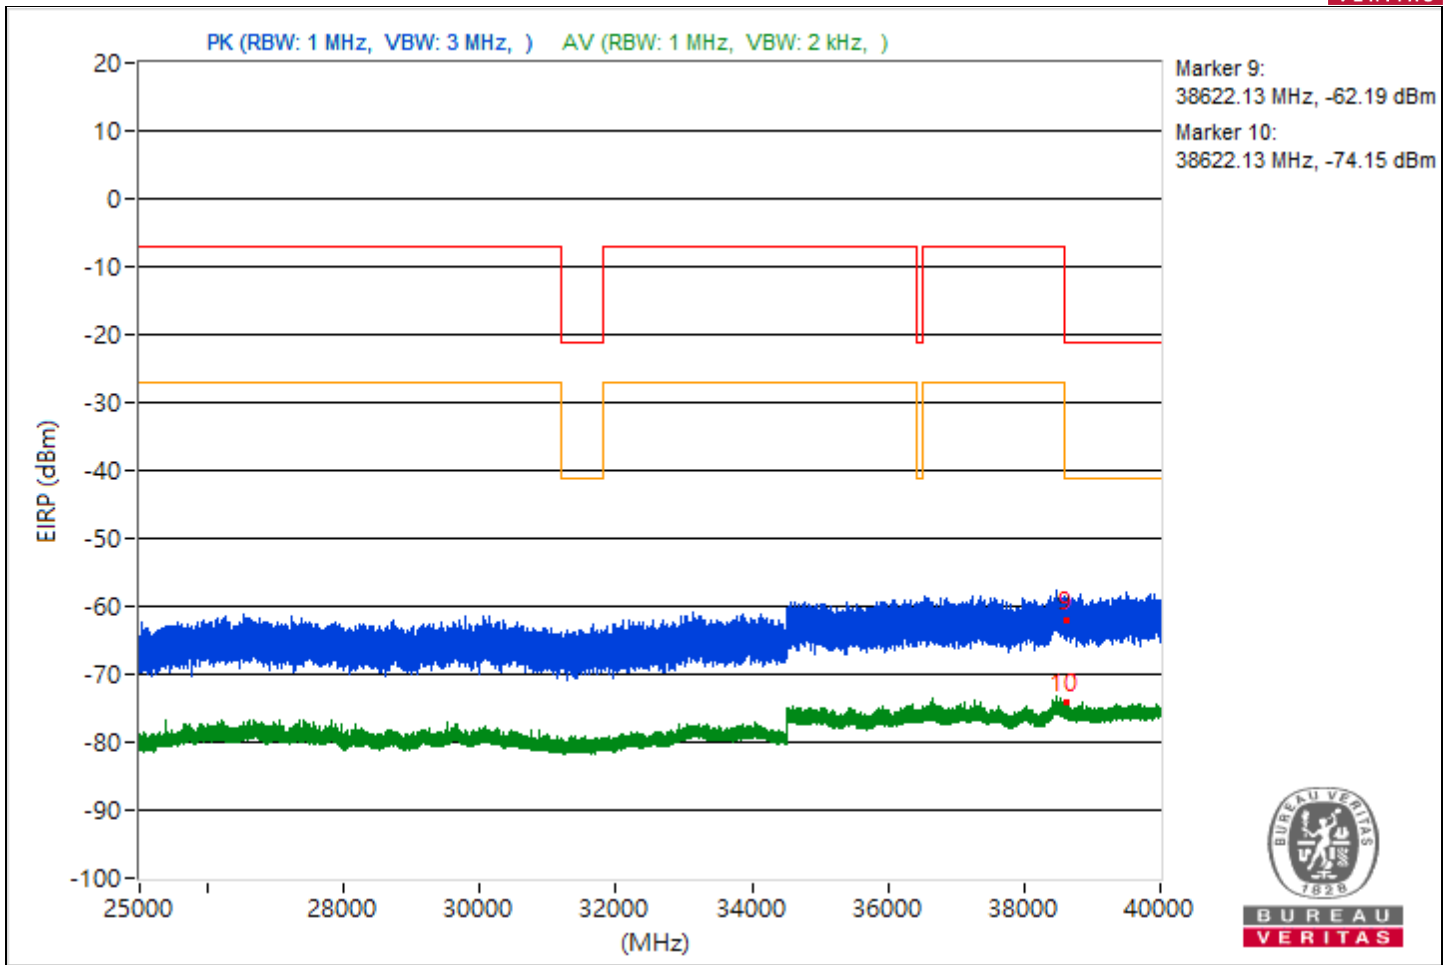



|                 |                                        |                          |                   |
|-----------------|----------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 111 : 6505 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                         | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                            |                          |                   |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| 1   | 5450.91         | 39.42 PK                | 74             | -34.58      | -67.72                  | -66.77                  | 8.37                   | -55.84           |
| 2   | 5450.91         | 33.08 AV                | 54             | -20.92      | -74.07                  | -73.11                  | 8.37                   | -62.18           |
| 3   | 7250.77         | 40.03 PK                | 74             | -33.97      | -65.76                  | -67.68                  | 8.37                   | -55.23           |
| 4   | 7250.77         | 32.7 AV                 | 54             | -21.3       | -74.59                  | -73.38                  | 8.37                   | -62.56           |
| 5   | 21229.6         | 38.92 PK                | 74             | -35.08      | -69.98                  | -66.24                  | 8.37                   | -56.34           |
| 6   | 21229.6         | 25.64 AV                | 54             | -28.36      | -83.27                  | -79.51                  | 8.37                   | -69.62           |
| 7   | 23927           | 39.82 PK                | 74             | -34.18      | -65.99                  | -67.84                  | 8.37                   | -55.44           |
| 8   | 23927           | 27.21 AV                | 54             | -26.79      | -81.38                  | -78.09                  | 8.37                   | -68.05           |
| 9   | 39484.98        | 32.99 PK                | 74             | -41.01      | -73.11                  | -74.26                  | 8.37                   | -62.27           |
| 10  | 39484.98        | 20.89 AV                | 54             | -33.11      | -87.42                  | -84.55                  | 8.37                   | -74.37           |

Note: Margin value = Emission Level - Limit value

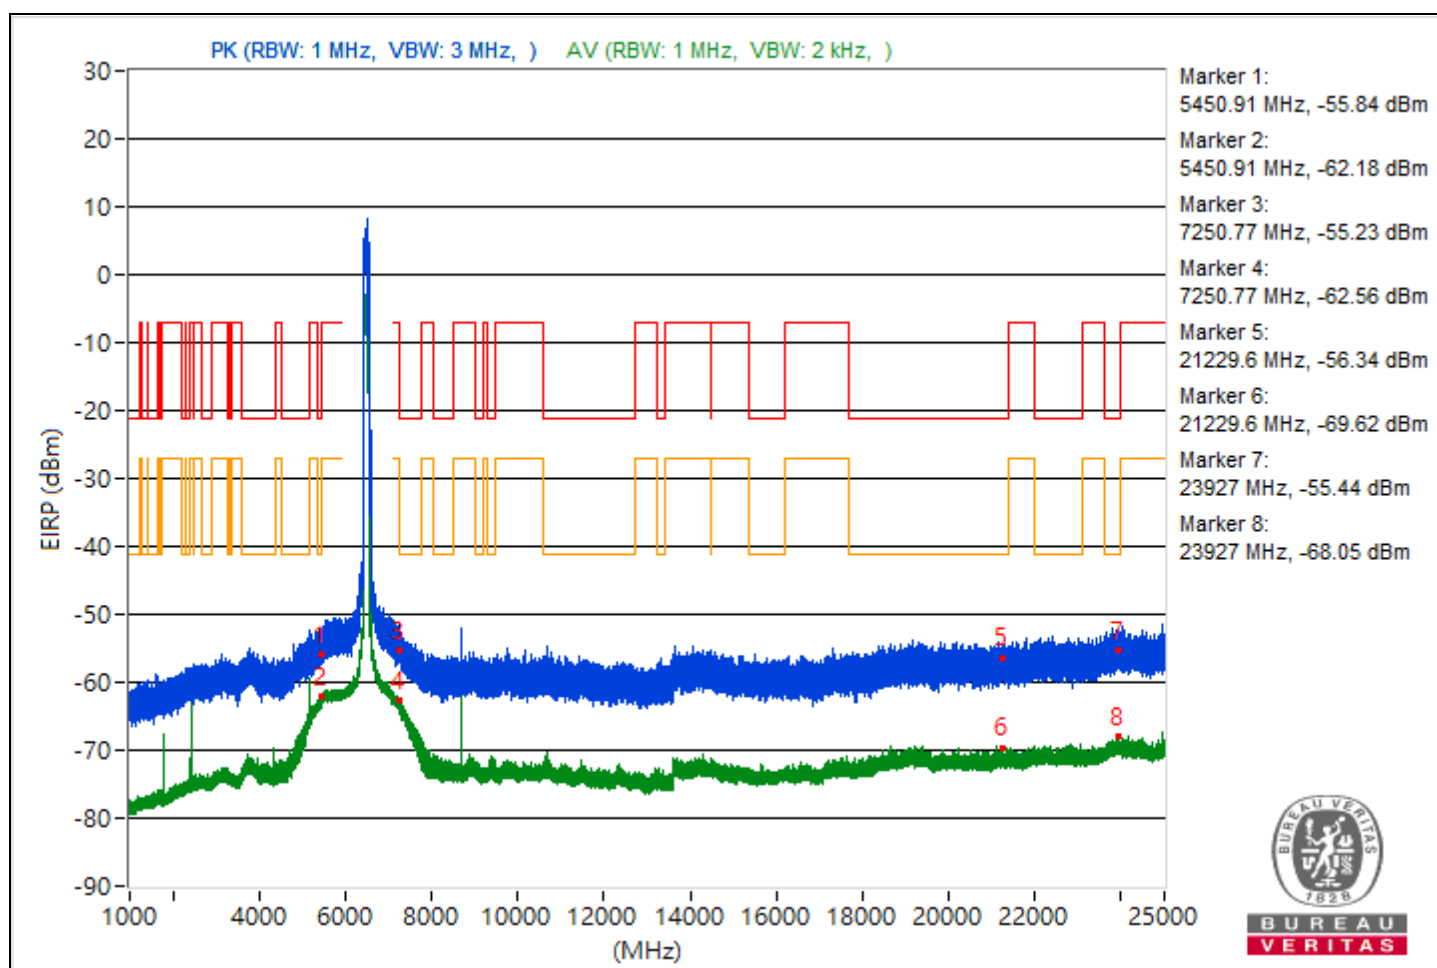


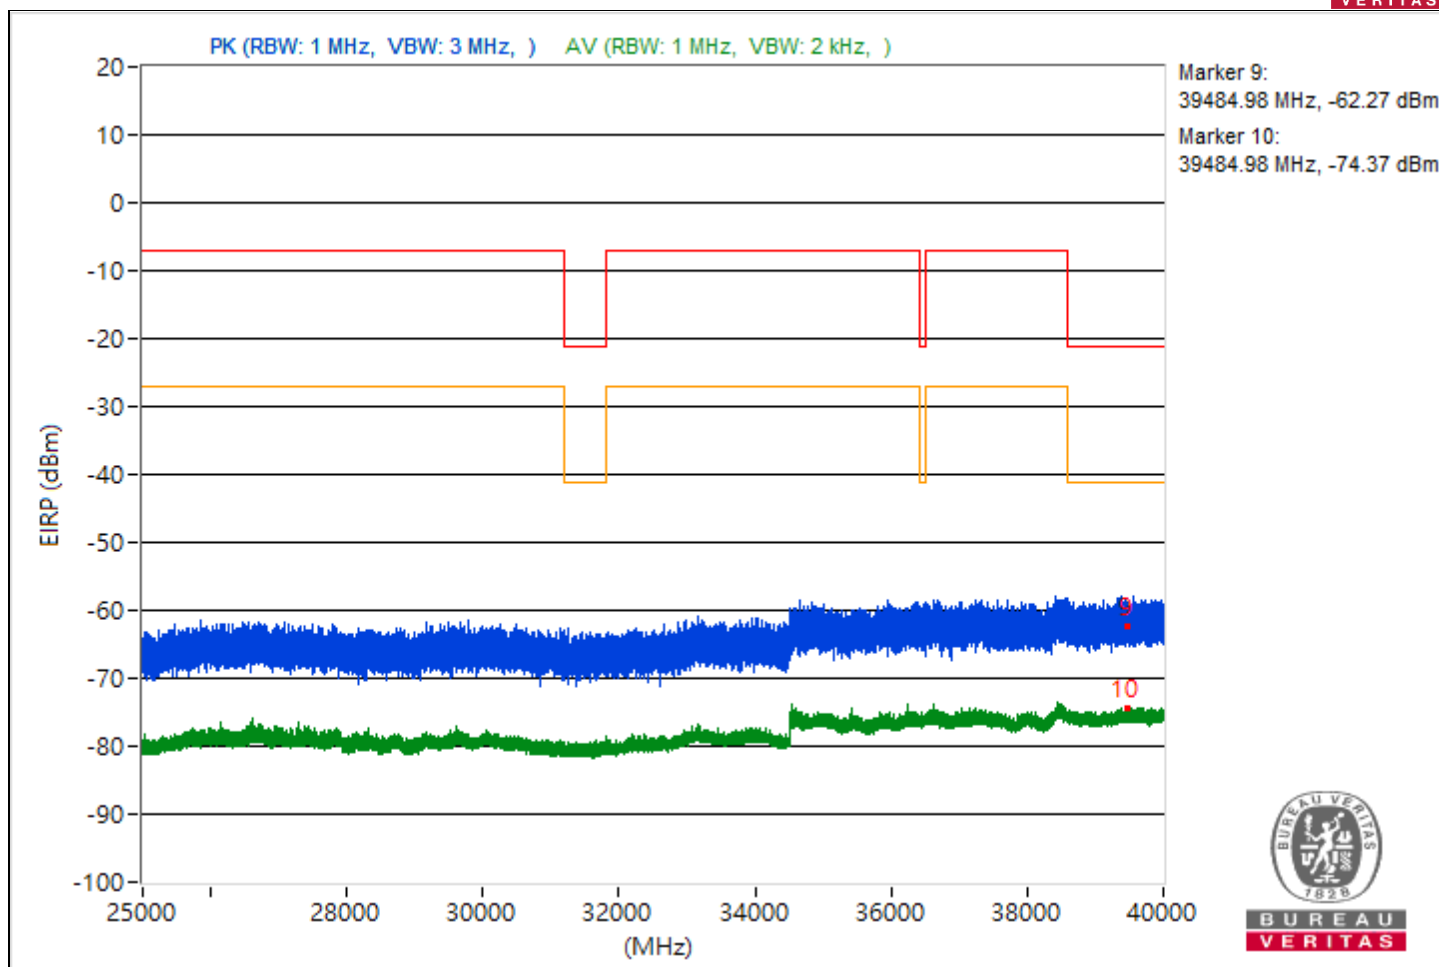


|                 |                                        |                          |                   |
|-----------------|----------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                         | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                            |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5455.97         | 40.33 PK                | 74             | -33.67      | -67.02                  | -65.71                  | 8.37                   | -54.93           |
| 2                            | 5455.97         | 32.91 AV                | 54             | -21.09      | -73.26                  | -74.26                  | 8.37                   | -62.35           |
| 3                            | 7251            | 42.31 PK                | 74             | -31.69      | -64.61                  | -64.07                  | 8.37                   | -52.95           |
| 4                            | 7251            | 33.51 AV                | 54             | -20.49      | -74.01                  | -72.4                   | 8.37                   | -61.75           |
| 5                            | 19122.9         | 37.32 PK                | 74             | -36.68      | -68.3                   | -70.66                  | 8.37                   | -57.94           |
| 6                            | 19122.9         | 25.43 AV                | 54             | -28.57      | -79.86                  | -83.19                  | 8.37                   | -69.83           |
| 7                            | 23901.6         | 39.7 PK                 | 74             | -34.3       | -68.7                   | -65.69                  | 8.37                   | -55.56           |
| 8                            | 23901.6         | 27.99 AV                | 54             | -26.01      | -80.18                  | -77.53                  | 8.37                   | -67.27           |
| 9                            | 39715.91        | 34.09 PK                | 74             | -39.91      | -71.36                  | -74.18                  | 8.37                   | -61.17           |
| 10                           | 39715.91        | 21.12 AV                | 54             | -32.88      | -86.71                  | -84.58                  | 8.37                   | -74.14           |

Note: Margin value = Emission Level - Limit value

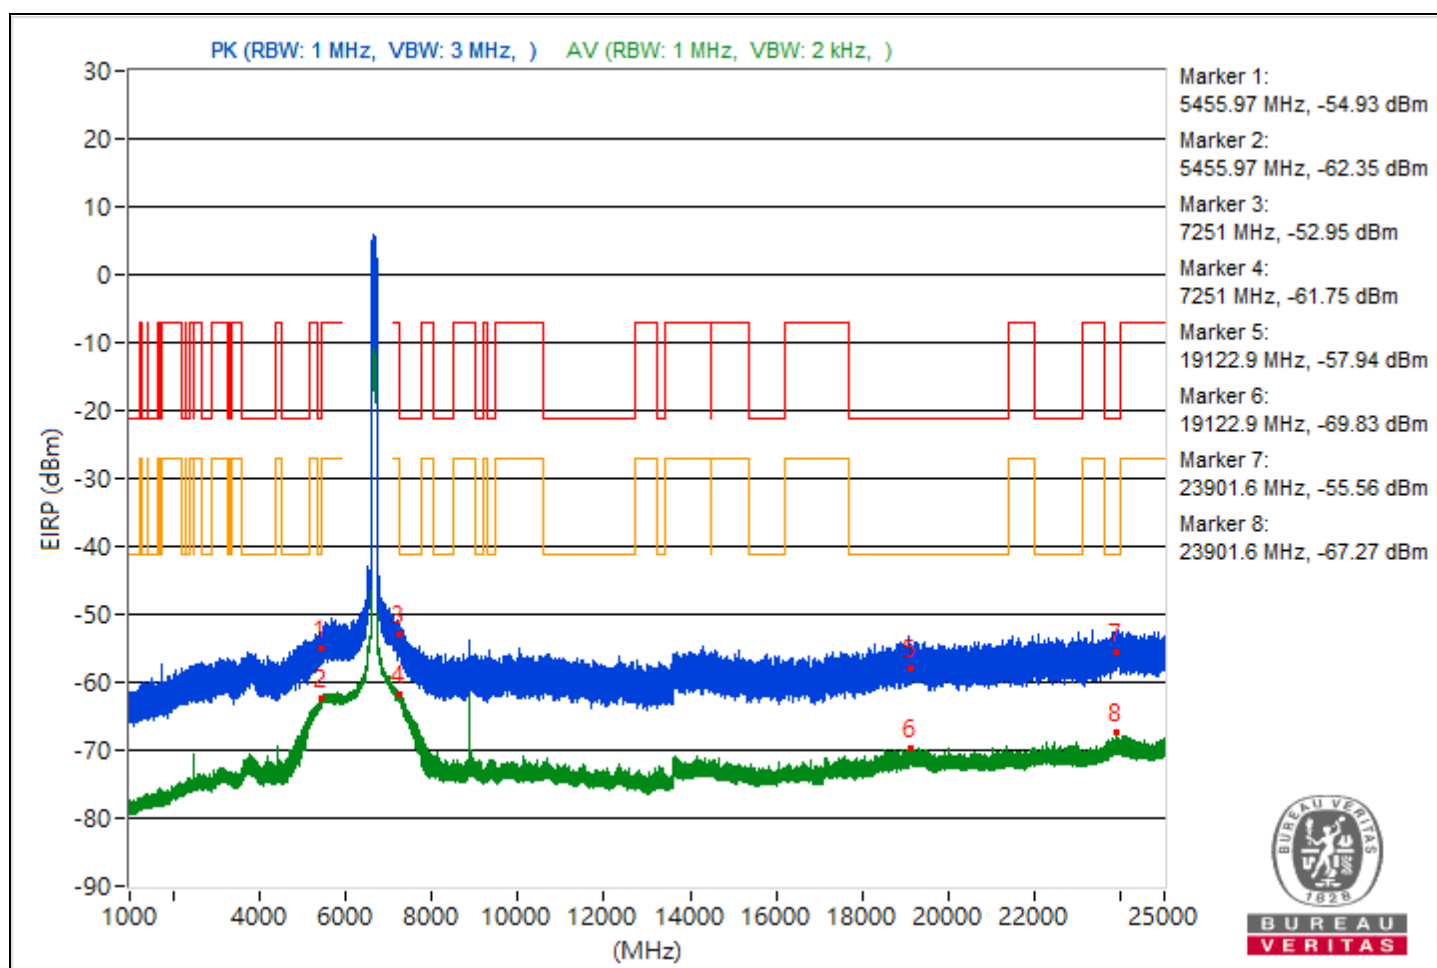


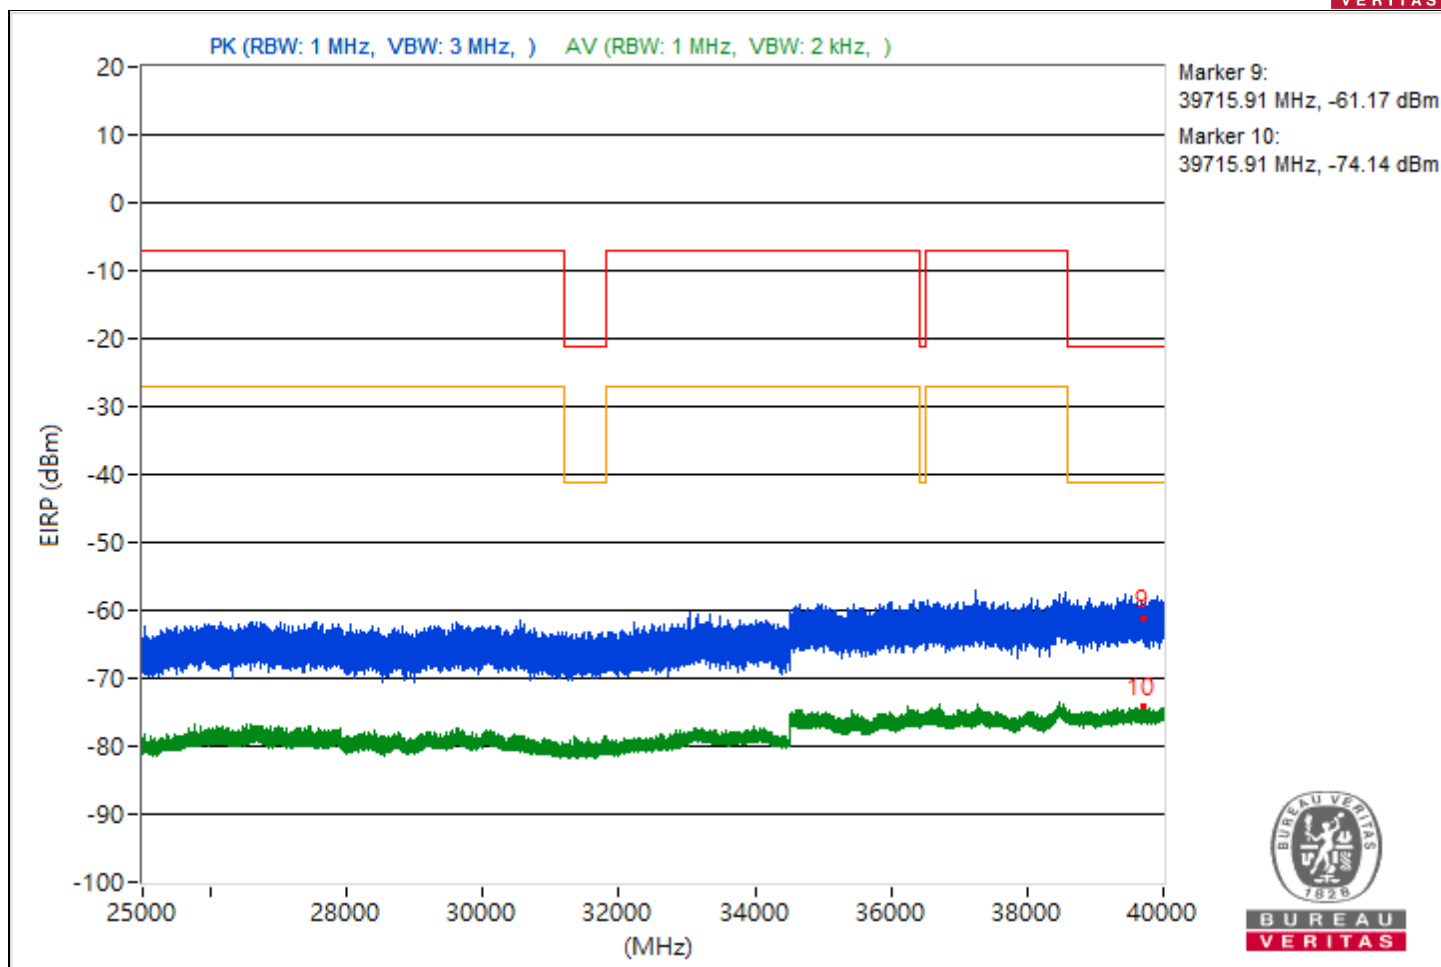


|                 |                                        |                          |                   |
|-----------------|----------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 175 : 6825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                         | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                            |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5455.34         | 40.63 PK                | 74             | -33.37      | -66.8                   | -65.35                  | 8.37                   | -54.63           |
| 2                            | 5455.34         | 33.97 AV                | 54             | -20.03      | -72.51                  | -72.85                  | 8.37                   | -61.29           |
| 3                            | 7255.9          | 42.87 PK                | 74             | -31.13      | -63.4                   | -64.17                  | 8.37                   | -52.39           |
| 4                            | 7255.9          | 36.27 AV                | 54             | -17.73      | -70.28                  | -70.47                  | 8.37                   | -58.99           |
| 5                            | 18838.8         | 37.06 PK                | 74             | -36.94      | -71.44                  | -68.29                  | 8.37                   | -58.2            |
| 6                            | 18838.8         | 25.58 AV                | 54             | -28.42      | -83.18                  | -79.64                  | 8.37                   | -69.68           |
| 7                            | 23889.7         | 39.37 PK                | 74             | -34.63      | -66.69                  | -67.96                  | 8.37                   | -55.89           |
| 8                            | 23889.7         | 27.52 AV                | 54             | -26.48      | -77.8                   | -81.02                  | 8.37                   | -67.74           |
| 9                            | 39761.69        | 34.56 PK                | 74             | -39.44      | -71.52                  | -72.73                  | 8.37                   | -60.7            |
| 10                           | 39761.69        | 21.1 AV                 | 54             | -32.9       | -87.71                  | -84.1                   | 8.37                   | -74.16           |

Note: Margin value = Emission Level - Limit value

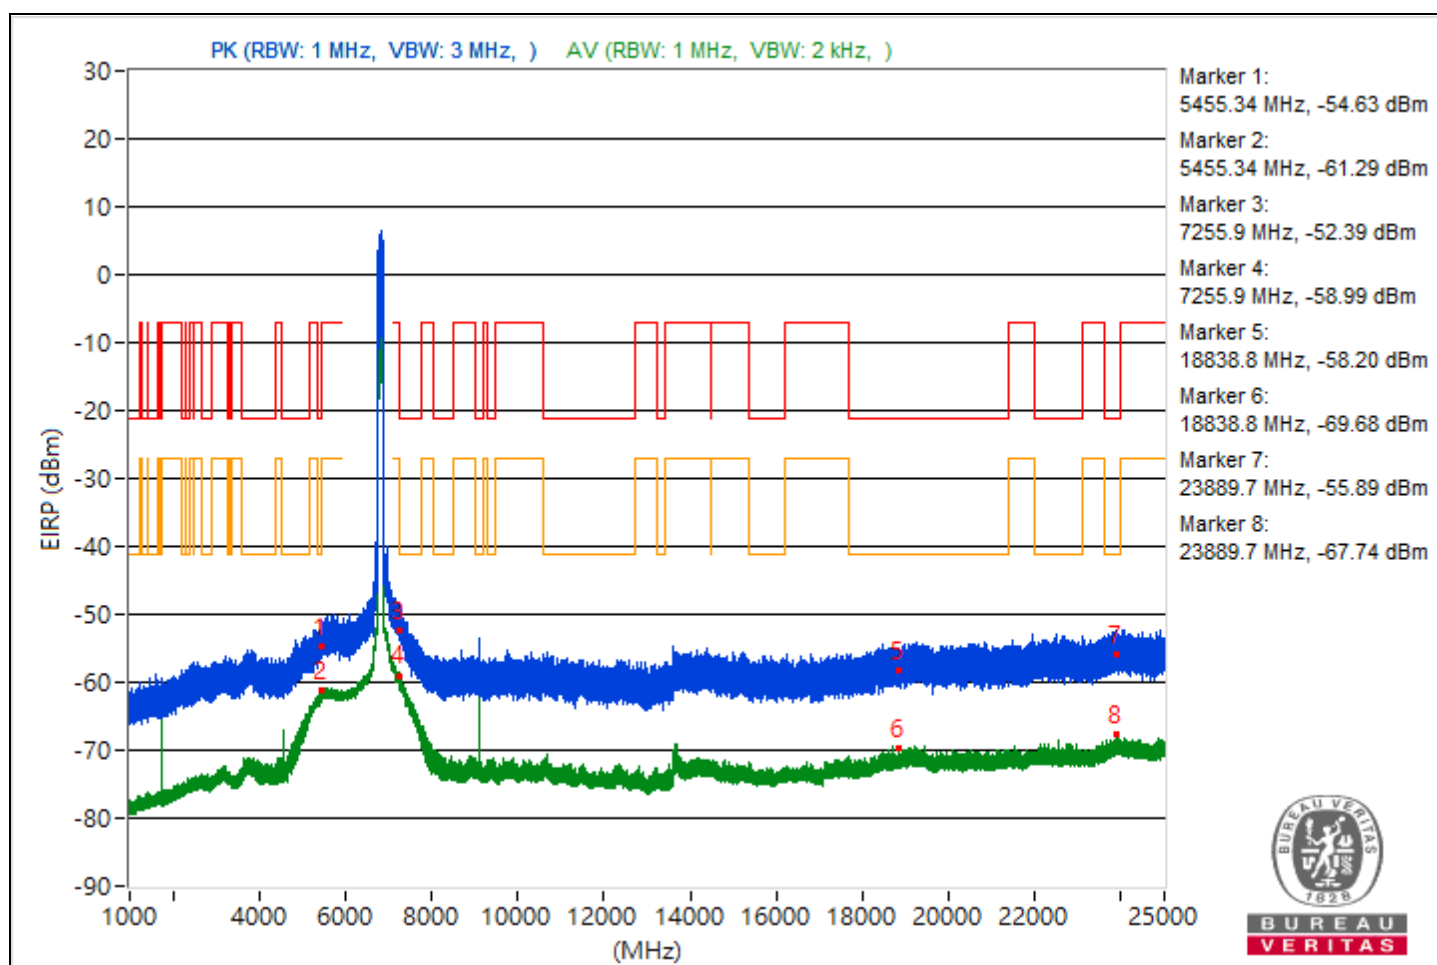

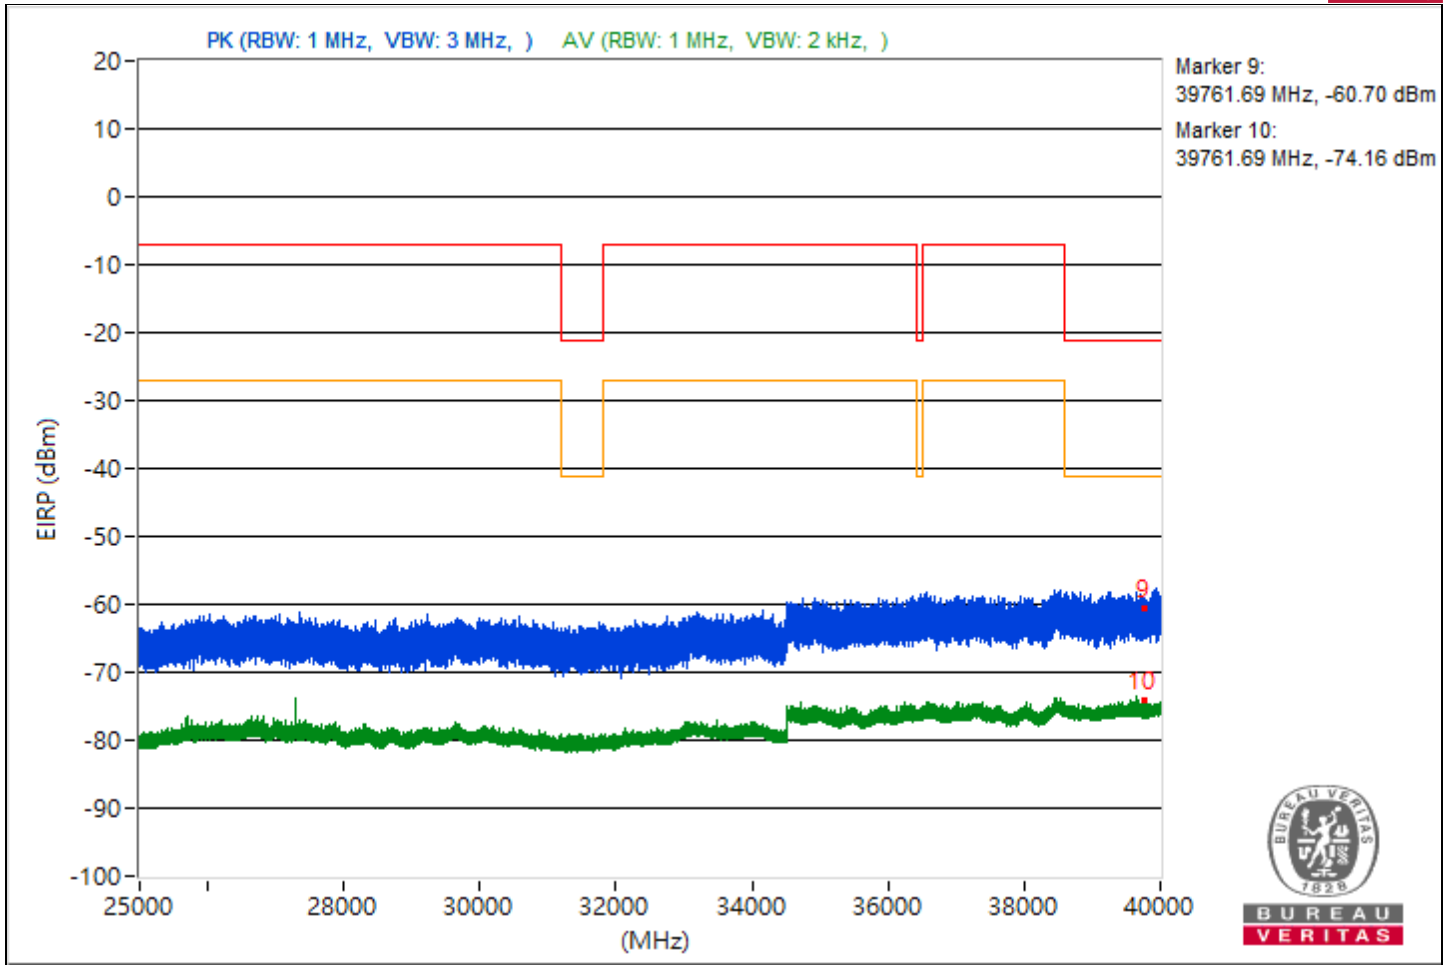



|                 |                                        |                          |                   |
|-----------------|----------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 207 : 6985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                         | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                            |                          |                   |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| 1   | 5414.82         | 38.89 PK                | 74             | -35.11      | -66.82                  | -68.95                  | 8.37                   | -56.37           |
| 2   | 5414.82         | 31.14 AV                | 54             | -22.86      | -75.1                   | -75.95                  | 8.37                   | -64.12           |
| 3   | 7254.27         | 42.56 PK                | 74             | -31.44      | -63.18                  | -65.21                  | 8.37                   | -52.7            |
| 4   | 7254.27         | 36 AV                   | 54             | -18         | -70.4                   | -70.9                   | 8.37                   | -59.26           |
| 5   | 19133.5         | 37.85 PK                | 74             | -36.15      | -68.17                  | -69.52                  | 8.37                   | -57.41           |
| 6   | 19133.5         | 26.33 AV                | 54             | -27.67      | -82.44                  | -78.89                  | 8.37                   | -68.93           |
| 7   | 22078.8         | 39.7 PK                 | 74             | -34.3       | -69.78                  | -65.24                  | 8.37                   | -55.56           |
| 8   | 22078.8         | 27.1 AV                 | 54             | -26.9       | -78.08                  | -81.76                  | 8.37                   | -68.16           |
| 9   | 39713.16        | 32.88 PK                | 74             | -41.12      | -74.25                  | -73.33                  | 8.37                   | -62.38           |
| 10  | 39713.16        | 21.19 AV                | 54             | -32.81      | -85.84                  | -85.09                  | 8.37                   | -74.07           |

Note: Margin value = Emission Level - Limit value

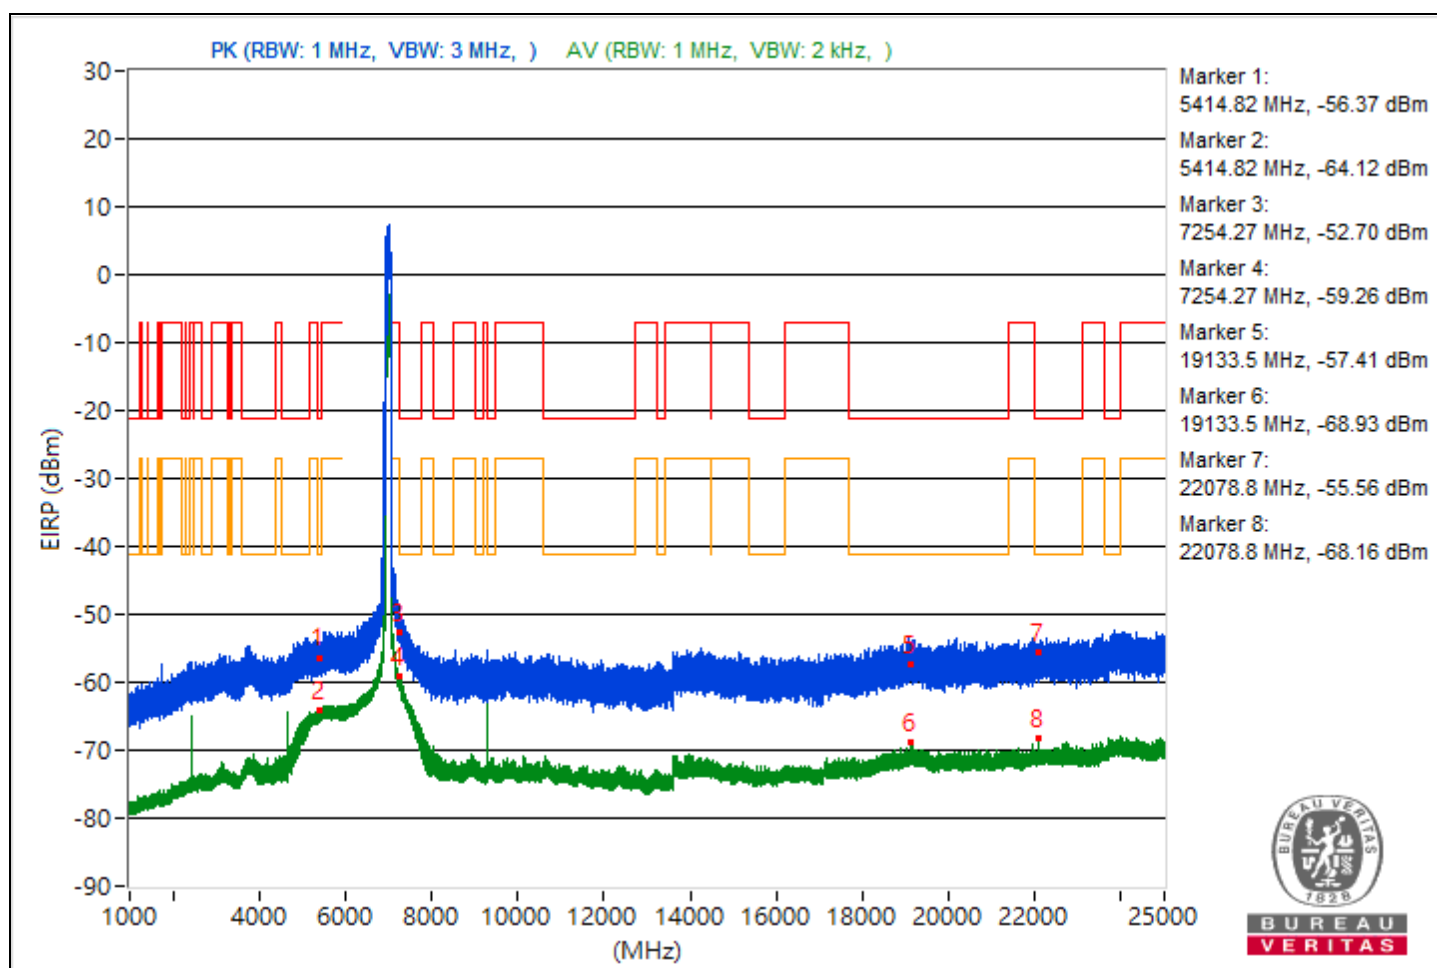

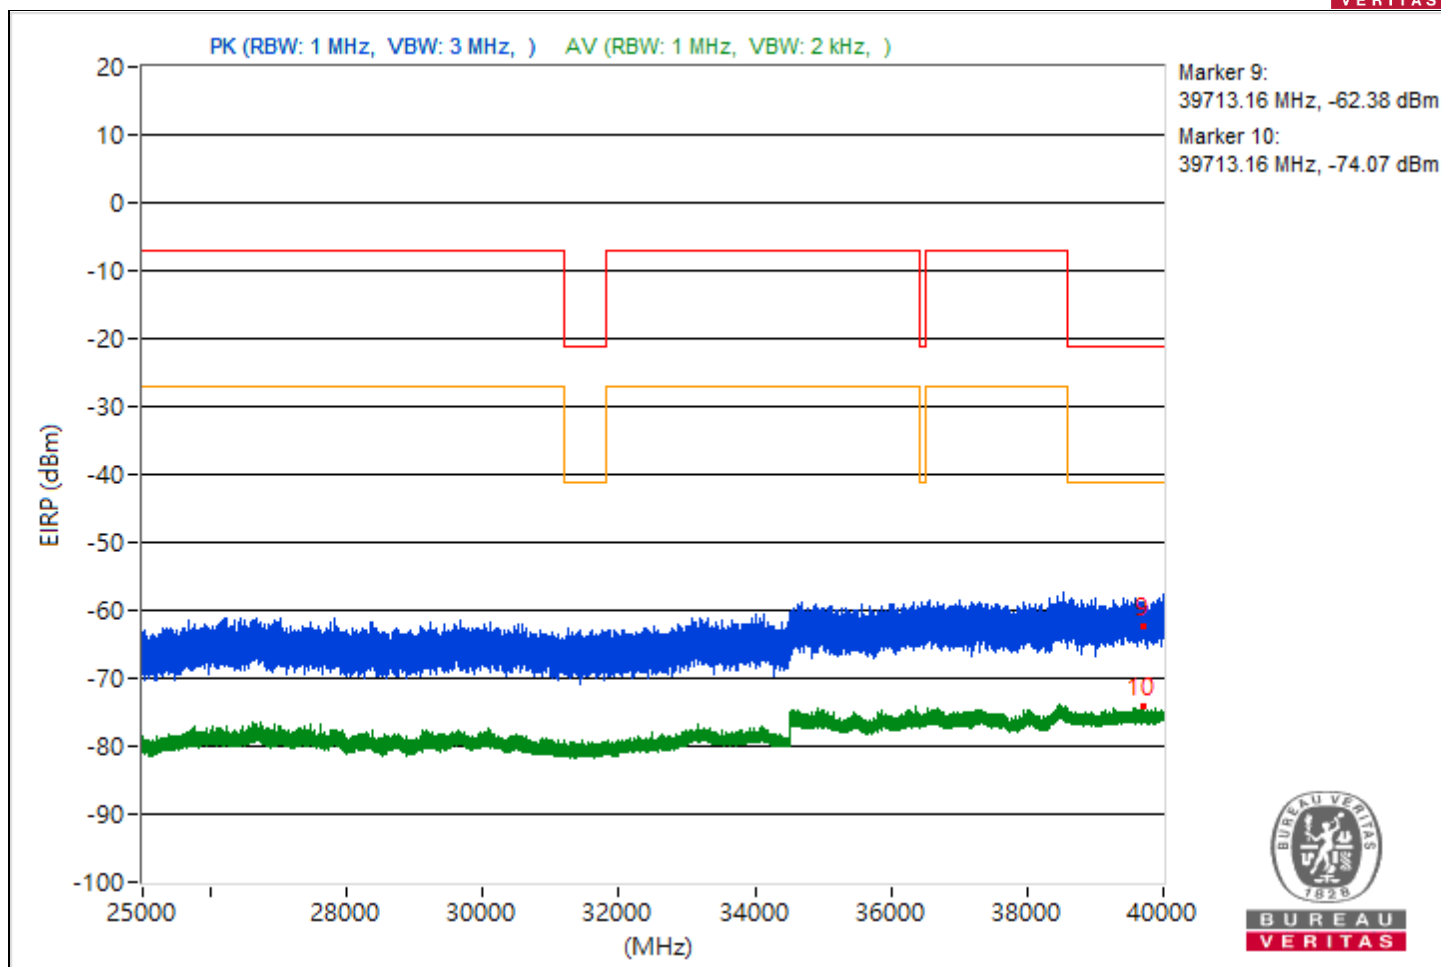

## Conducted Band Edges


### 2TX

|                 |                       |                          |                 |
|-----------------|-----------------------|--------------------------|-----------------|
| RF Mode         | 802.11a               | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung           |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5954.15        | 98.97 PK                |                |             | -10.52                  | -10.84                  | 11.38                  | 3.71             |
| 2                   | *5954.15        | 91.22 AV                |                |             | -18.38                  | -18.48                  | 11.38                  | -4.04            |
| 3                   | #5914.35        | 49.11 PK                | 88.26          | -39.15      | -59.55                  | -61.81                  | 11.38                  | -46.15           |
| 4                   | #5914.35        | 36.24 AV                | 68.26          | -32.02      | -72.58                  | -74.43                  | 11.38                  | -59.02           |

#### Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

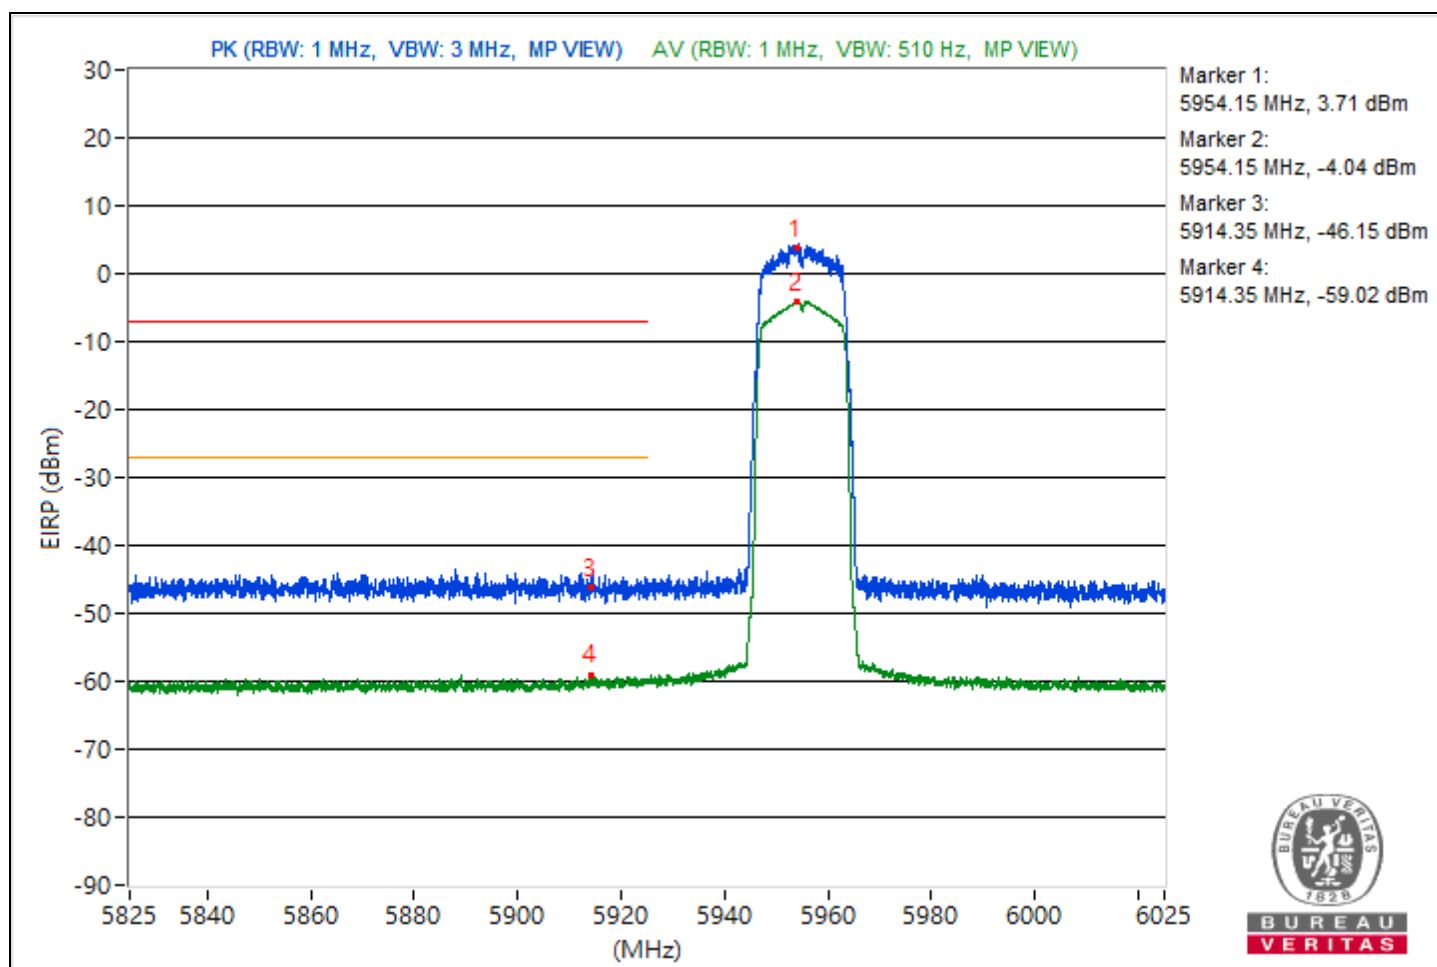


|                 |                       |                          |                   |
|-----------------|-----------------------|--------------------------|-------------------|
| RF Mode         | 802.11a               | Channel                  | CH 233 : 7115 MHz |
| Frequency Range | 7.025 GHz ~ 7.225 GHz | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung           |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *7116.02        | 100.05 PK               |                |             | -9.88                   | -9.34                   | 11.38                  | 4.79             |
| 2                   | *7116.02        | 91.47 AV                |                |             | -17.65                  | -18.78                  | 11.38                  | -3.79            |
| 3                   | #7125           | 61.05 PK                | 88.26          | -27.21      | -48.56                  | -48.64                  | 11.38                  | -34.21           |
| 4                   | #7125           | 46.33 AV                | 68.26          | -21.93      | -63.08                  | -63.56                  | 11.38                  | -48.93           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

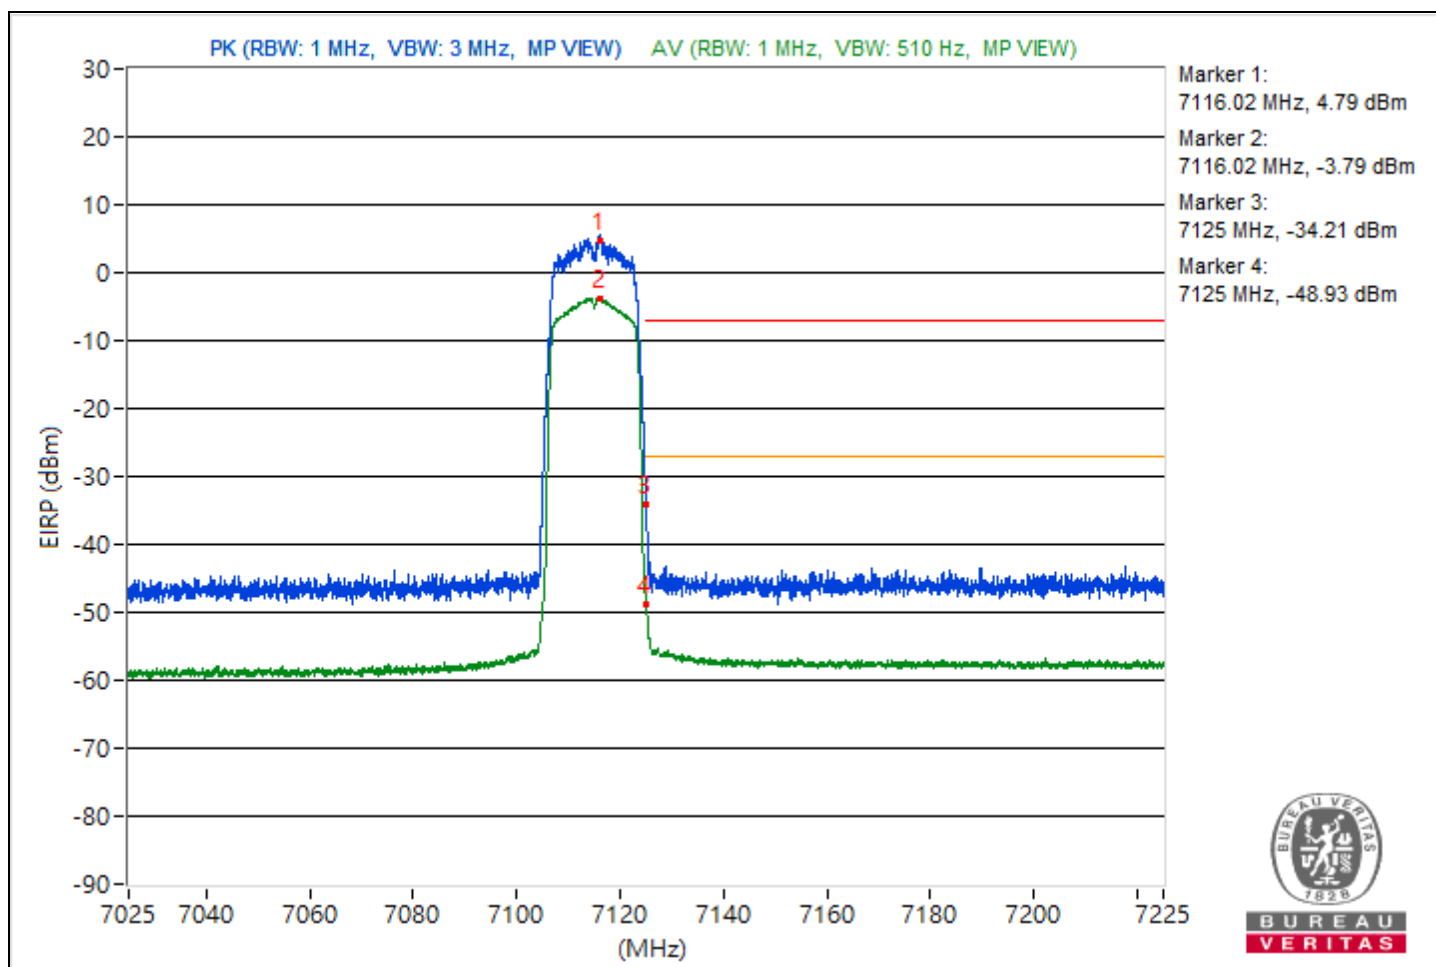


## 2S2T

|                 |                       |                          |                 |
|-----------------|-----------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20)      | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung           |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5954.3         | 99.85 PK                |                |             | -7.22                   | -6.41                   | 8.37                   | 4.59             |
| 2                   | *5954.3         | 91.54 AV                |                |             | -15.03                  | -15.18                  | 8.37                   | -3.72            |
| 3                   | #5922.98        | 46.96 PK                | 88.26          | -41.3       | -59.03                  | -60.45                  | 8.37                   | -48.3            |
| 4                   | #5922.98        | 33.91 AV                | 68.26          | -34.35      | -72.54                  | -72.94                  | 8.37                   | -61.35           |

### Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

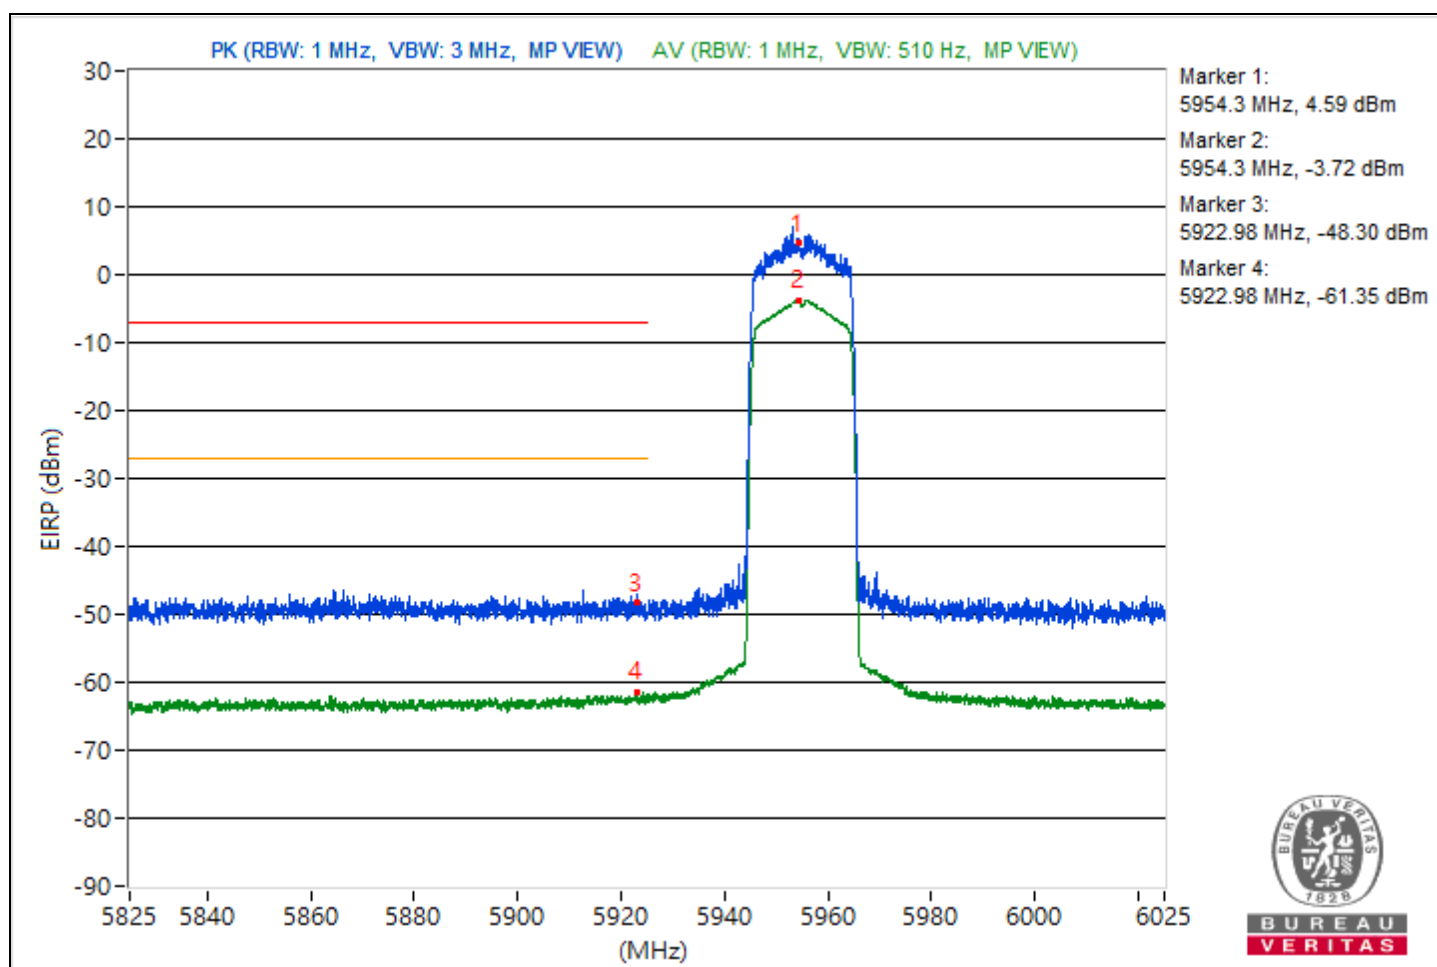

|                          |                  |           |                   |
|--------------------------|------------------|-----------|-------------------|
| RF Mode                  | 802.11be (EHT20) | Channel   | CH 233 : 7115 MHz |
| Environmental Conditions | 25°C, 60% RH     | Tested By | Dolly Chung       |


| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | #7125           | 57.76 PK                | 88.26          | -30.5       | -48.81                  | -48.96                  | 8.37                   | -37.5            |
| 2                   | #7125           | 44.87 AV                | 68.26          | -23.39      | -62                     | -61.56                  | 8.37                   | -50.39           |

Notes:


1. Margin value = Emission Level - Limit value.
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

For Integration method:

### Chain 0

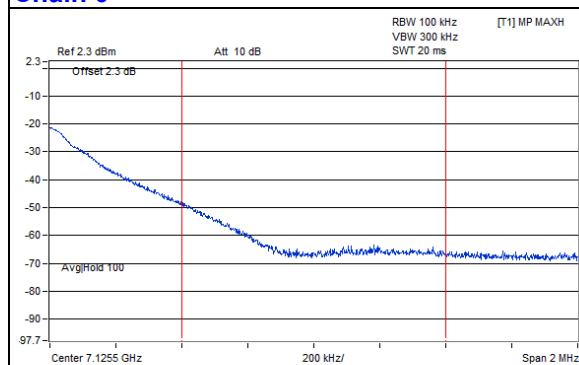


Peak

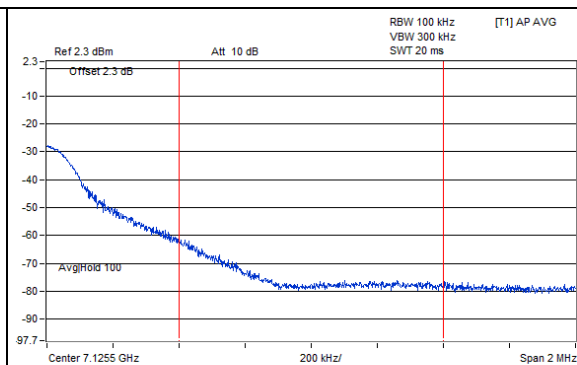


Average

### Chain 1

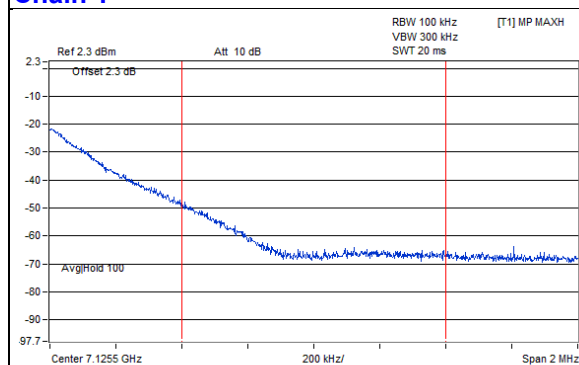

Peak

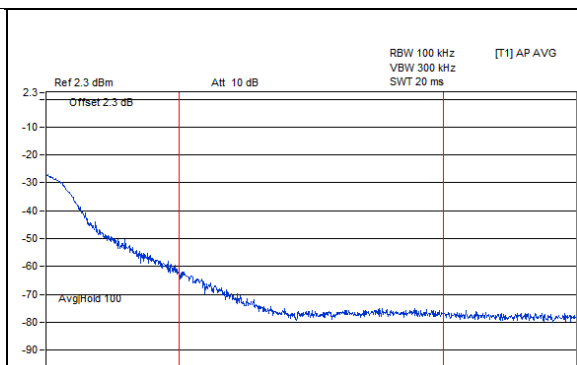


Average

|                 |                       |                          |                 |
|-----------------|-----------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT40)      | Channel                  | CH 3 : 5965 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung           |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5964.12        | 99.26 PK                |                |             | -7.49                   | -7.27                   | 8.37                   | 4                |
| 2                   | *5964.12        | 91.42 AV                |                |             | -15.44                  | -15.02                  | 8.37                   | -3.84            |
| 3                   | #5924.77        | 47.07 PK                | 88.26          | -41.19      | -59.43                  | -59.72                  | 8.37                   | -48.19           |
| 4                   | #5924.77        | 37.12 AV                | 68.26          | -31.14      | -69.45                  | -69.59                  | 8.37                   | -58.14           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

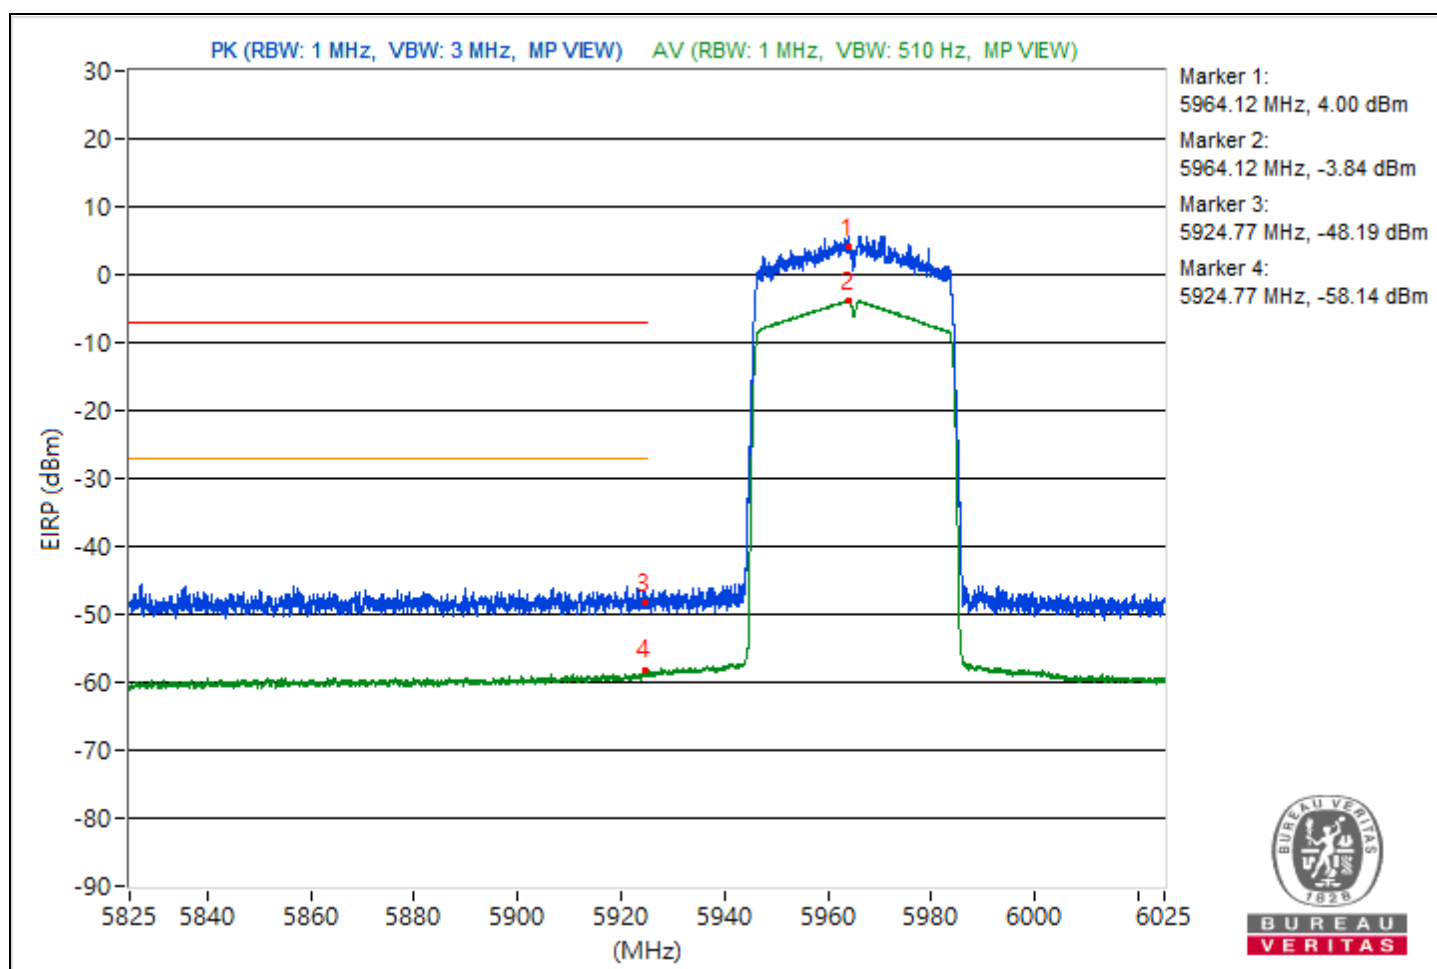


|                 |                       |                          |                   |
|-----------------|-----------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40)      | Channel                  | CH 227 : 7085 MHz |
| Frequency Range | 7.025 GHz ~ 7.225 GHz | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung           |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *7083.87        | 100.34 PK               |                |             | -7.1                    | -5.62                   | 8.37                   | 5.08             |
| 2                   | *7083.87        | 91.8 AV                 |                |             | -14.7                   | -14.98                  | 8.37                   | -3.46            |
| 3                   | #7125.02        | 48.95 PK                | 88.26          | -39.31      | -58.19                  | -57.24                  | 8.37                   | -46.31           |
| 4                   | #7125.02        | 38.24 AV                | 68.26          | -30.02      | -68.62                  | -68.19                  | 8.37                   | -57.02           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

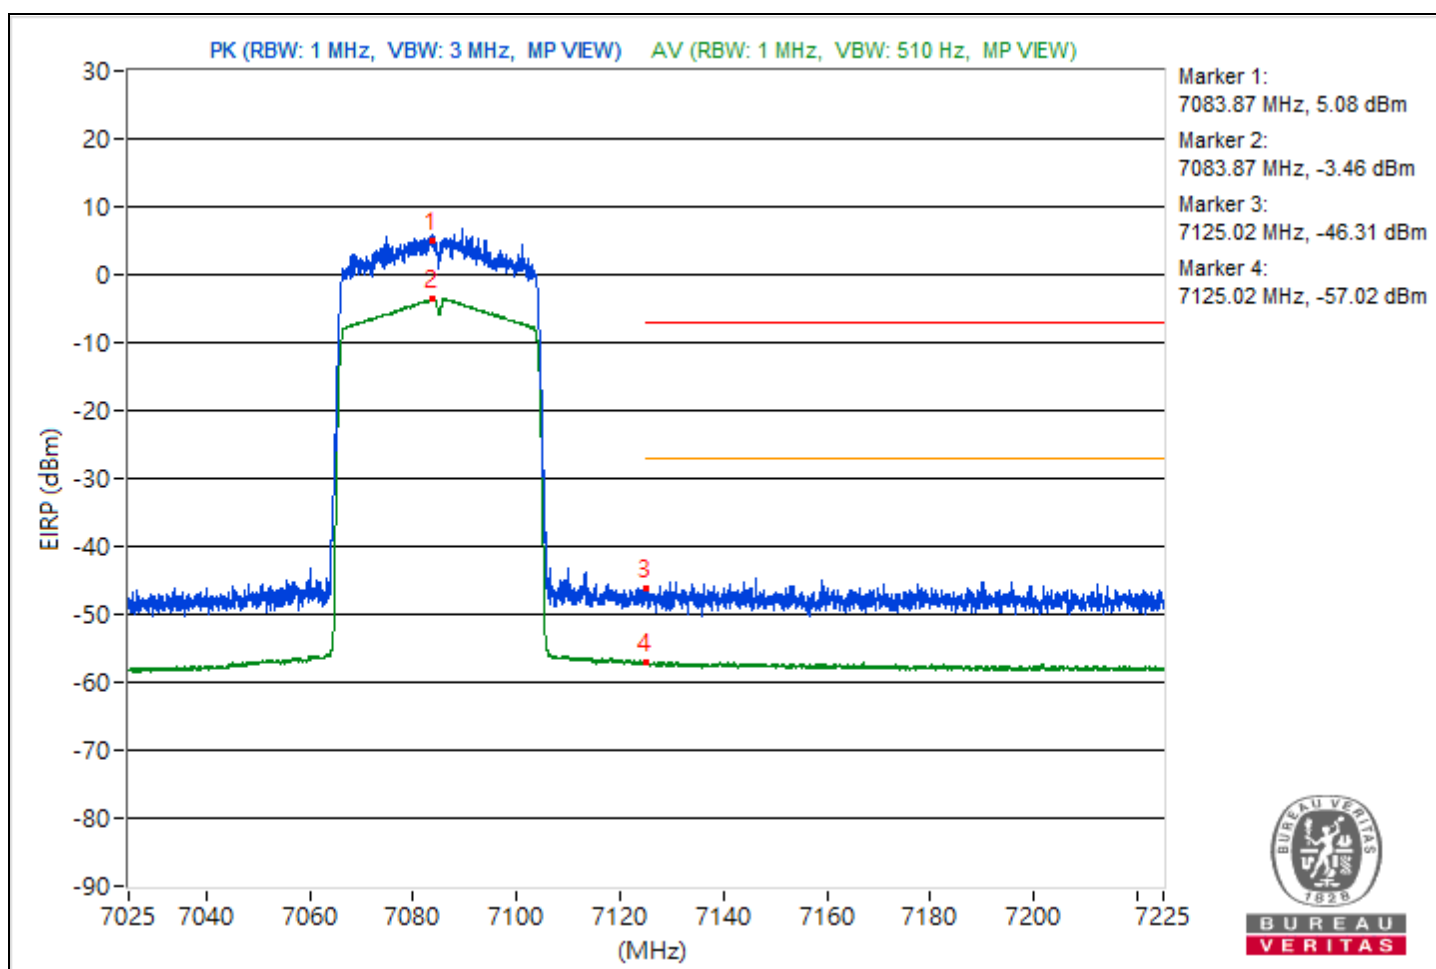


|                 |                       |                          |                 |
|-----------------|-----------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT80)      | Channel                  | CH 7 : 5985 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung           |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5986.87        | 99.87 PK                |                |             | -6.26                   | -7.34                   | 8.37                   | 4.61             |
| 2                   | *5986.87        | 92.25 AV                |                |             | -14.43                  | -14.36                  | 8.37                   | -3.01            |
| 3                   | #5924.45        | 49.18 PK                | 88.26          | -39.08      | -56.68                  | -58.42                  | 8.37                   | -46.08           |
| 4                   | #5924.45        | 40.74 AV                | 68.26          | -27.52      | -65.51                  | -66.32                  | 8.37                   | -54.52           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

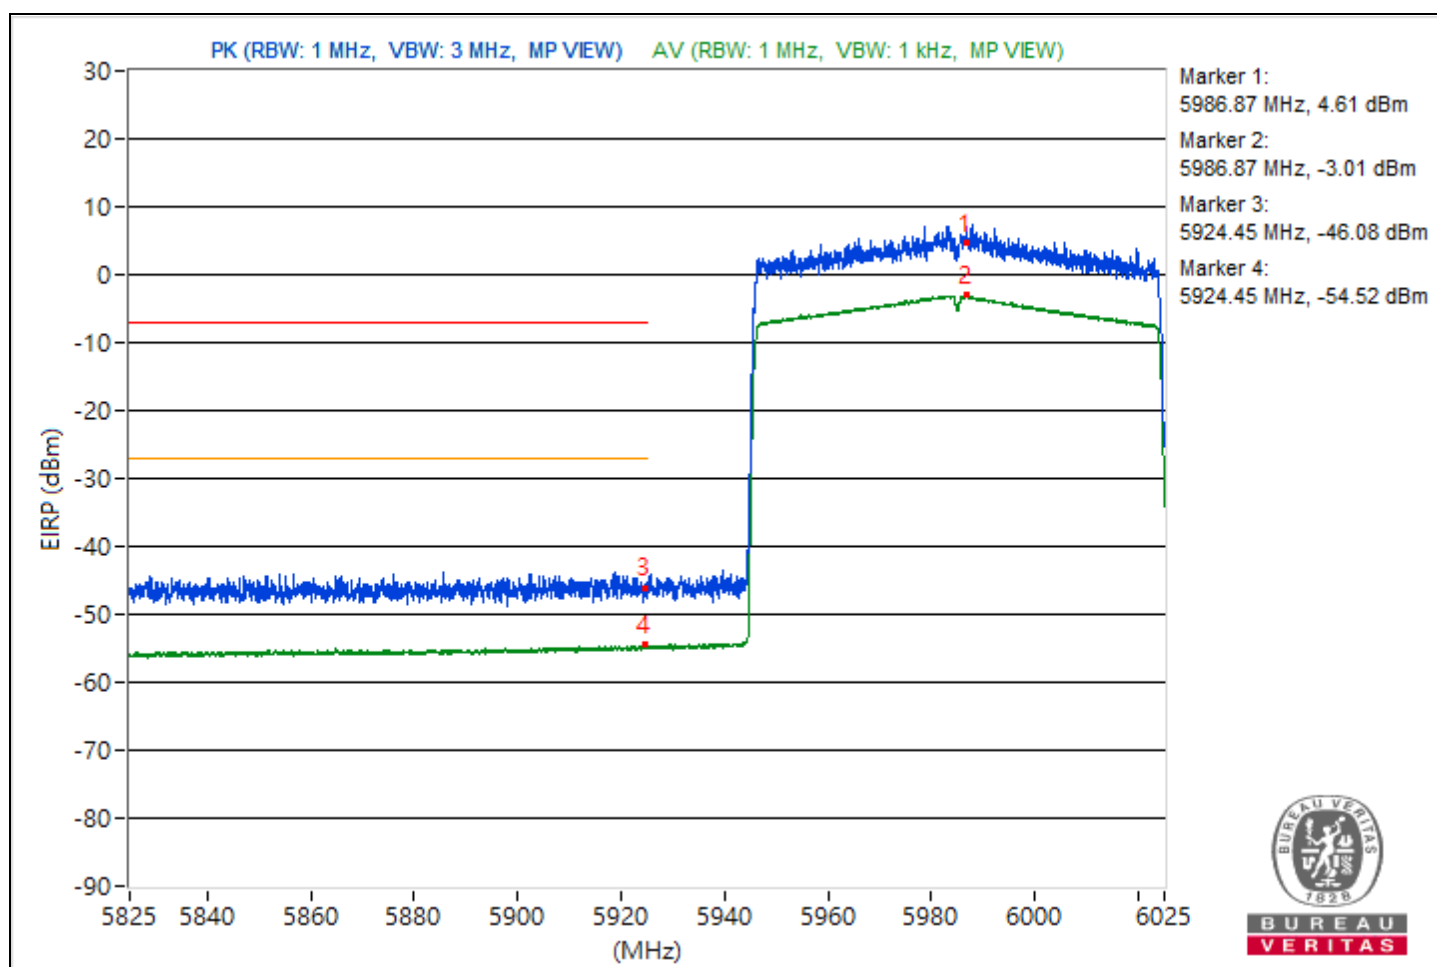


|                 |                       |                          |                   |
|-----------------|-----------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80)      | Channel                  | CH 215 : 7025 MHz |
| Frequency Range | 7.025 GHz ~ 7.225 GHz | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung           |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *7026.98        | 100.54 PK               |                |             | -4.63                   | -8.34                   | 8.37                   | 5.28             |
| 2                   | *7026.98        | 91.92 AV                |                |             | -14.63                  | -14.82                  | 8.37                   | -3.34            |
| 3                   | #7126.85        | 49.17 PK                | 88.26          | -39.09      | -58.83                  | -56.43                  | 8.37                   | -46.09           |
| 4                   | #7126.85        | 40.78 AV                | 68.26          | -27.48      | -65.86                  | -65.86                  | 8.37                   | -54.48           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

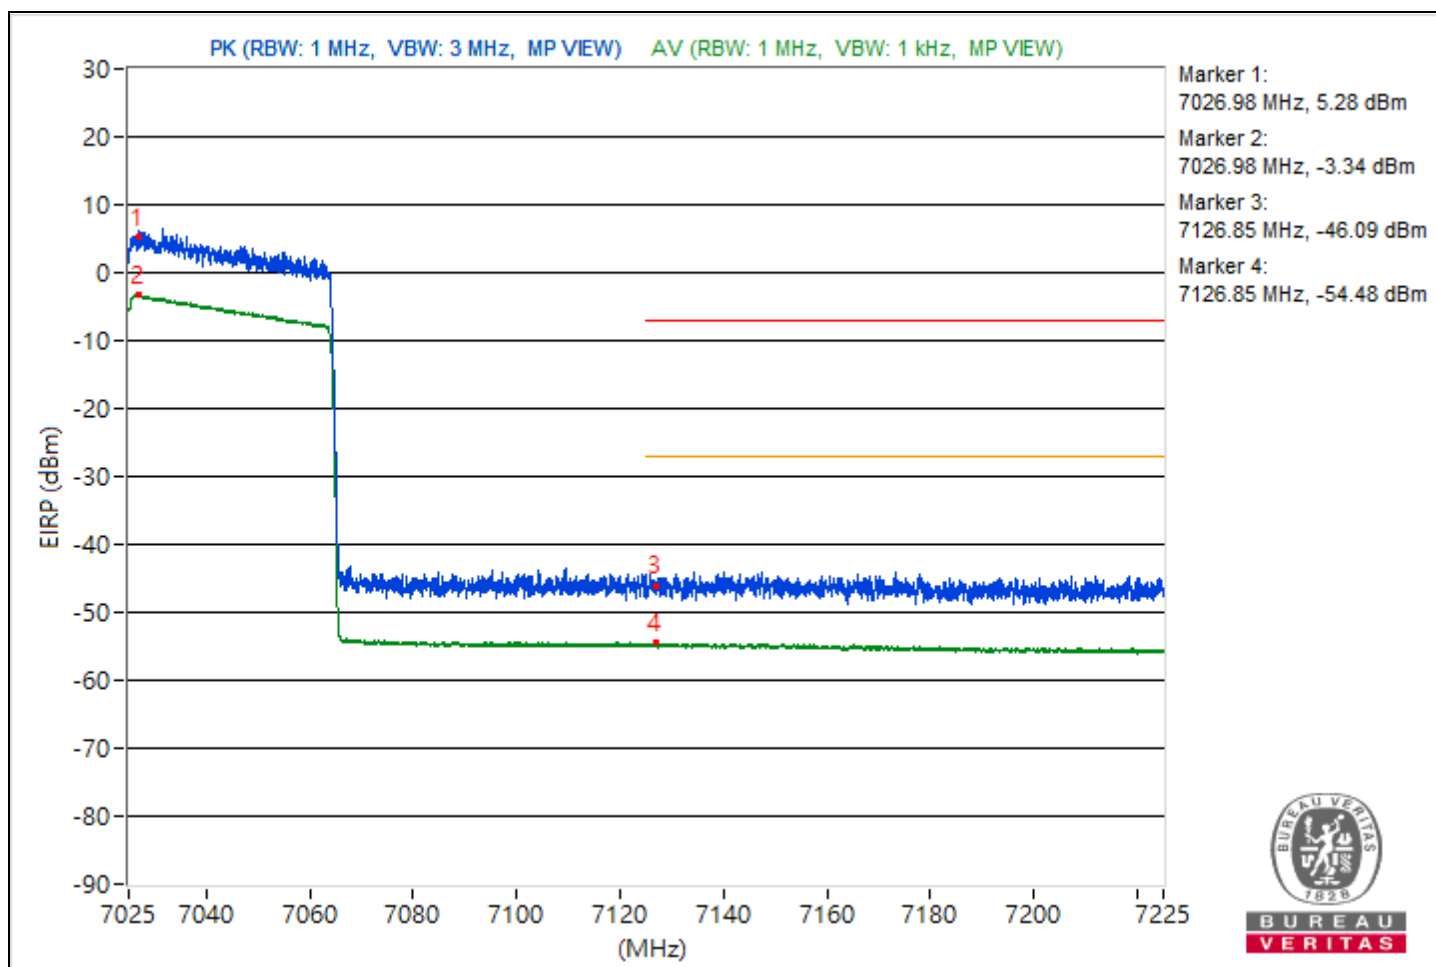


|                 |                       |                          |                  |
|-----------------|-----------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160)     | Channel                  | CH 15 : 6025 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6022.62        | 99.09 PK                |                |             | -7.51                   | -7.6                    | 8.37                   | 3.83             |
| 2                   | *6022.62        | 91.47 AV                |                |             | -15.11                  | -15.22                  | 8.37                   | -3.79            |
| 3                   | #5923.4         | 50.47 PK                | 88.26          | -37.79      | -56.03                  | -56.33                  | 8.37                   | -44.79           |
| 4                   | #5923.4         | 41.79 AV                | 68.26          | -26.47      | -64.46                  | -65.29                  | 8.37                   | -53.47           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

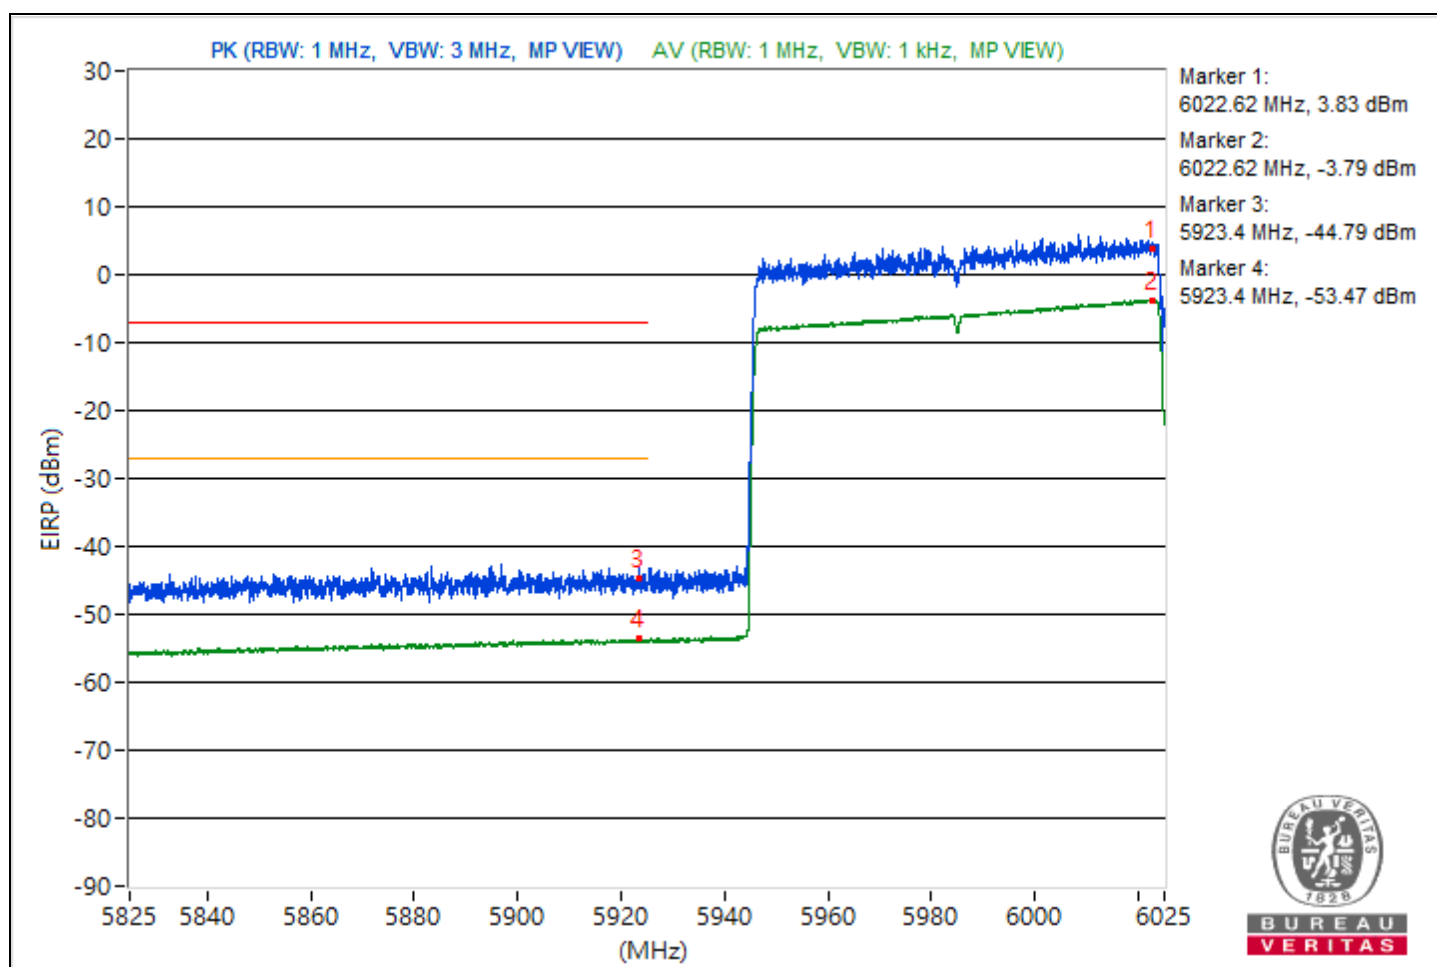


|                 |                       |                          |                   |
|-----------------|-----------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160)     | Channel                  | CH 207 : 6985 MHz |
| Frequency Range | 7.025 GHz ~ 7.225 GHz | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung           |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *7026.48        | 97.24 PK                |                |             | -9.39                   | -9.42                   | 8.37                   | 1.98             |
| 2                   | *7026.48        | 89.66 AV                |                |             | -16.62                  | -17.37                  | 8.37                   | -5.6             |
| 3                   | #7125.05        | 51.97 PK                | 88.26          | -36.29      | -53.59                  | -56.11                  | 8.37                   | -43.29           |
| 4                   | #7125.05        | 42.59 AV                | 68.26          | -25.67      | -63.84                  | -64.27                  | 8.37                   | -52.67           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

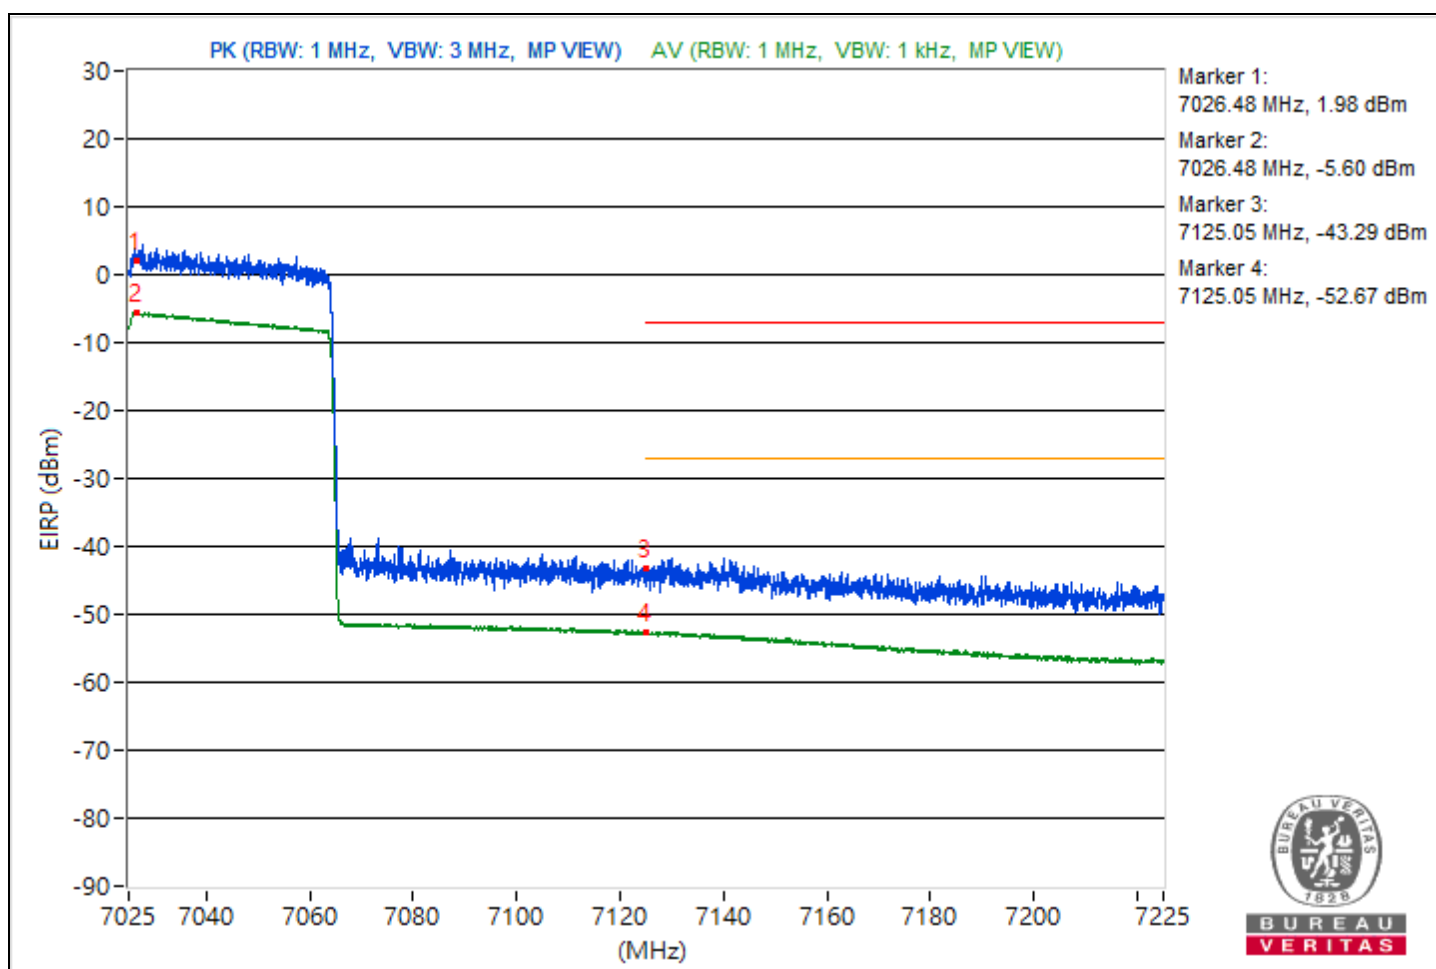


|                 |                             |                          |                 |
|-----------------|-----------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz       | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                 |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5946.48        | 102.76 PK               |                |             | -4.79                   | -3.13                   | 8.37                   | 7.5              |
| 2                   | *5946.48        | 93.16 AV                |                |             | -14.27                  | -12.81                  | 8.37                   | -2.1             |
| 3                   | #5875.3         | 58.84 PK                | 88.26          | -29.42      | -48.54                  | -47.17                  | 8.37                   | -36.42           |
| 4                   | #5875.3         | 46.61 AV                | 68.26          | -21.65      | -60.97                  | -59.26                  | 8.37                   | -48.65           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

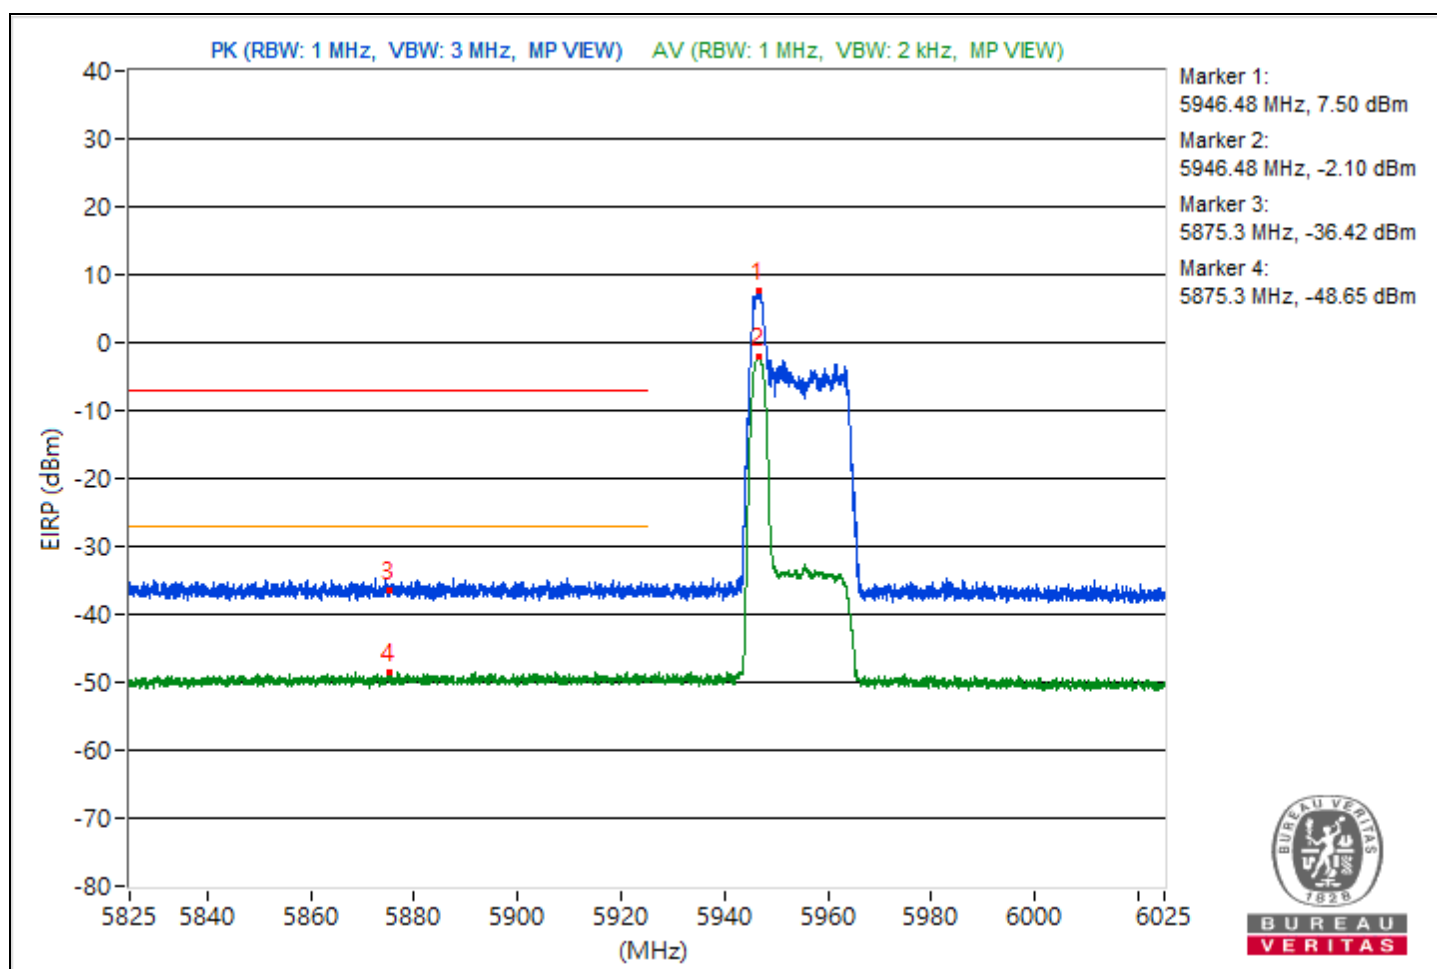

|                          |                             |           |                   |
|--------------------------|-----------------------------|-----------|-------------------|
| RF Mode                  | 802.11be (EHT20) 26-tone RU | Channel   | CH 233 : 7115 MHz |
| Environmental Conditions | 25°C, 60% RH                | Tested By | Dolly Chung       |


| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | #7125           | 73.51 PK                | 88.26          | -14.75      | -32.77                  | -33.53                  | 8.37                   | -21.75           |
| 2                   | #7125           | 58.24 AV                | 68.26          | -10.02      | -48.38                  | -48.42                  | 8.37                   | -37.02           |

#### Notes:


1. Margin value = Emission Level - Limit value.
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

#### For Integration method:

##### Chain 0

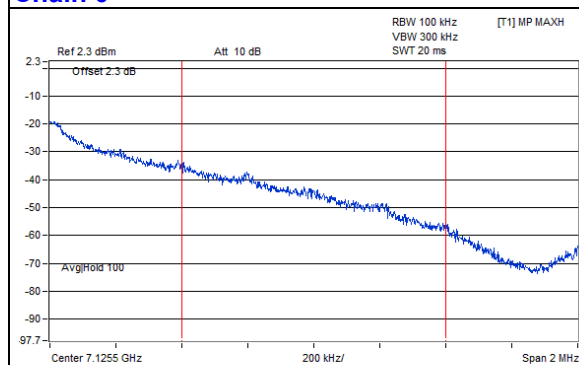


Peak

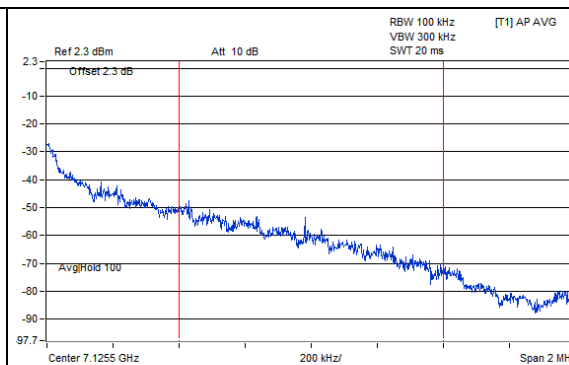


Average

##### Chain 1

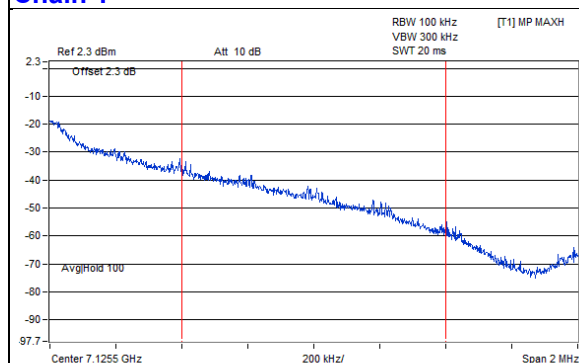

Peak

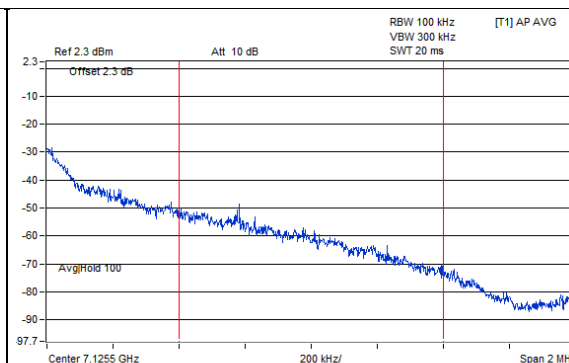


Average

|                 |                             |                          |                 |
|-----------------|-----------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz       | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                 |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5947.18        | 103.02 PK               |                |             | -3.29                   | -3.98                   | 8.37                   | 7.76             |
| 2                   | *5947.18        | 94.2 AV                 |                |             | -12.33                  | -12.54                  | 8.37                   | -1.06            |
| 3                   | #5887.6         | 59.14 PK                | 88.26          | -29.12      | -46.49                  | -48.83                  | 8.37                   | -36.12           |
| 4                   | #5887.6         | 46.75 AV                | 68.26          | -21.51      | -58.94                  | -61.1                   | 8.37                   | -48.51           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

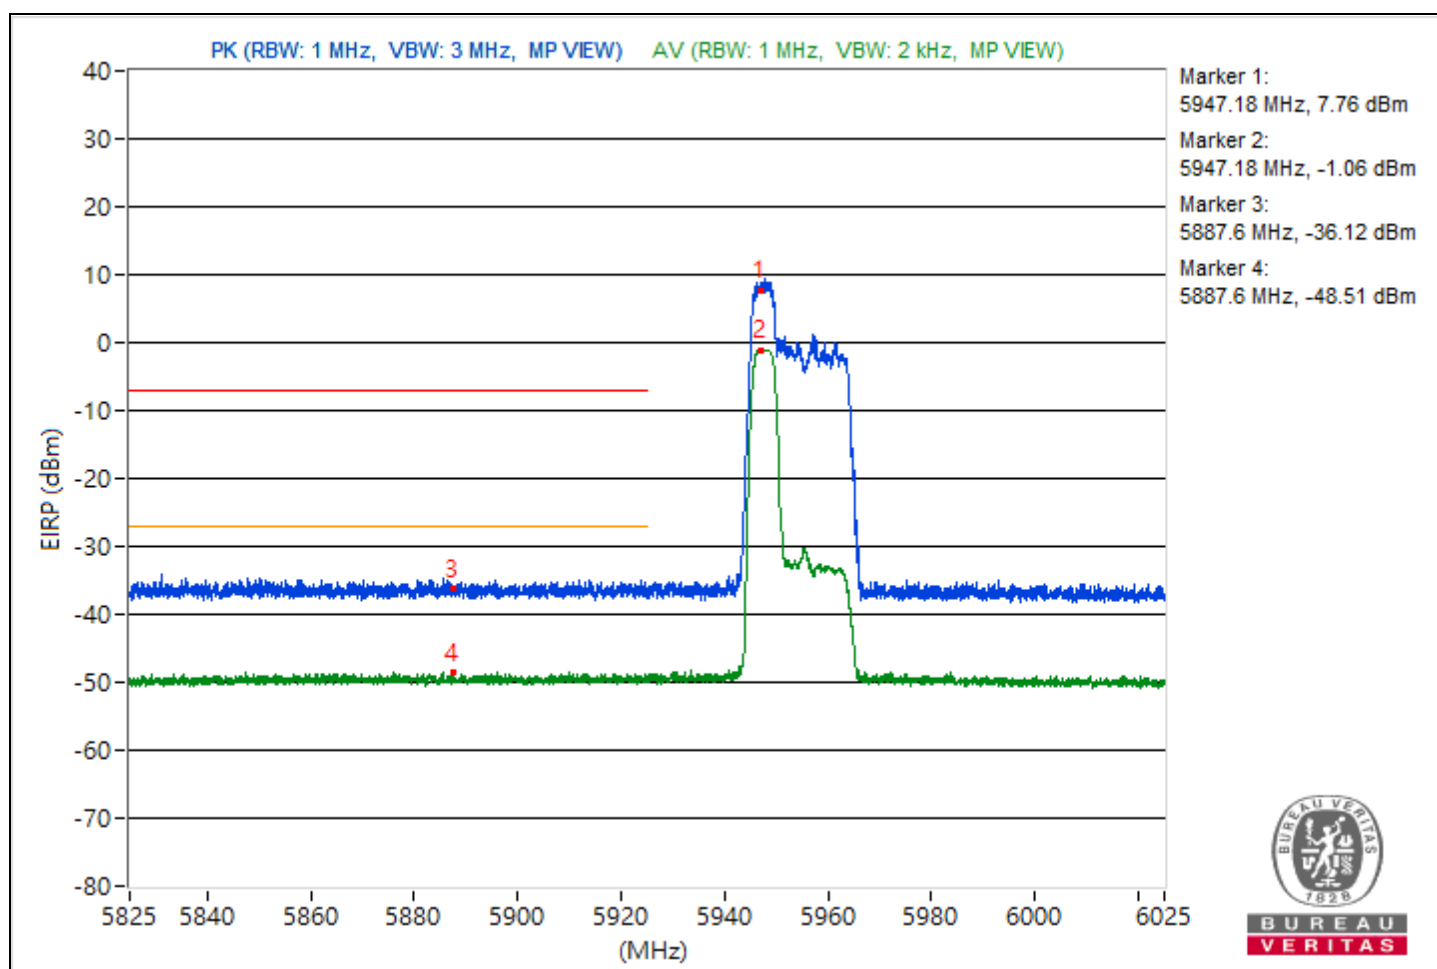

|                          |                             |           |                   |
|--------------------------|-----------------------------|-----------|-------------------|
| RF Mode                  | 802.11be (EHT20) 52-tone RU | Channel   | CH 233 : 7115 MHz |
| Environmental Conditions | 25°C, 60% RH                | Tested By | Dolly Chung       |


| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | #7125           | 73.71 PK                | 88.26          | -14.55      | -32.59                  | -33.31                  | 8.37                   | -21.55           |
| 2                   | #7125           | 58.44 AV                | 68.26          | -9.82       | -48.19                  | -48.22                  | 8.37                   | -36.82           |

Notes:


1. Margin value = Emission Level - Limit value.
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

For Integration method:

### Chain 0

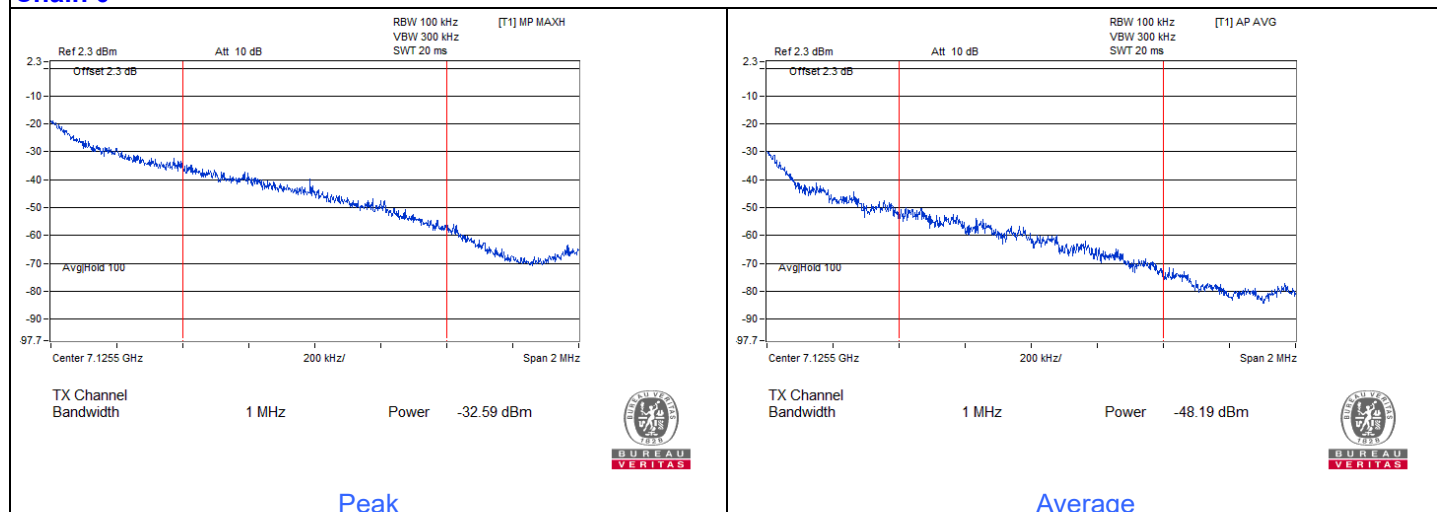

### Chain 1

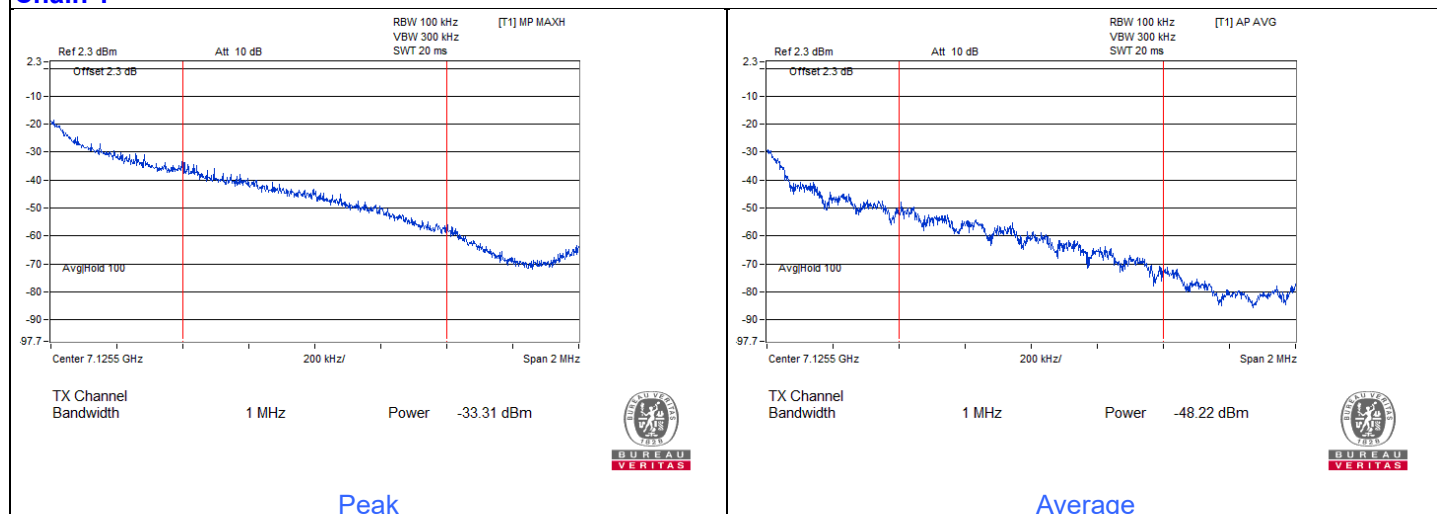


|                 |                              |                          |                 |
|-----------------|------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz        | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                  |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5949.95        | 102.58 PK               |                |             | -3.07                   | -5.33                   | 8.37                   | 7.32             |
| 2                   | *5949.95        | 93.76 AV                |                |             | -12.87                  | -12.88                  | 8.37                   | -1.5             |
| 3                   | #5924.32        | 58.39 PK                | 88.26          | -29.87      | -48.03                  | -48.48                  | 8.37                   | -36.87           |
| 4                   | #5924.32        | 46.22 AV                | 68.26          | -22.04      | -61.21                  | -59.76                  | 8.37                   | -49.04           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

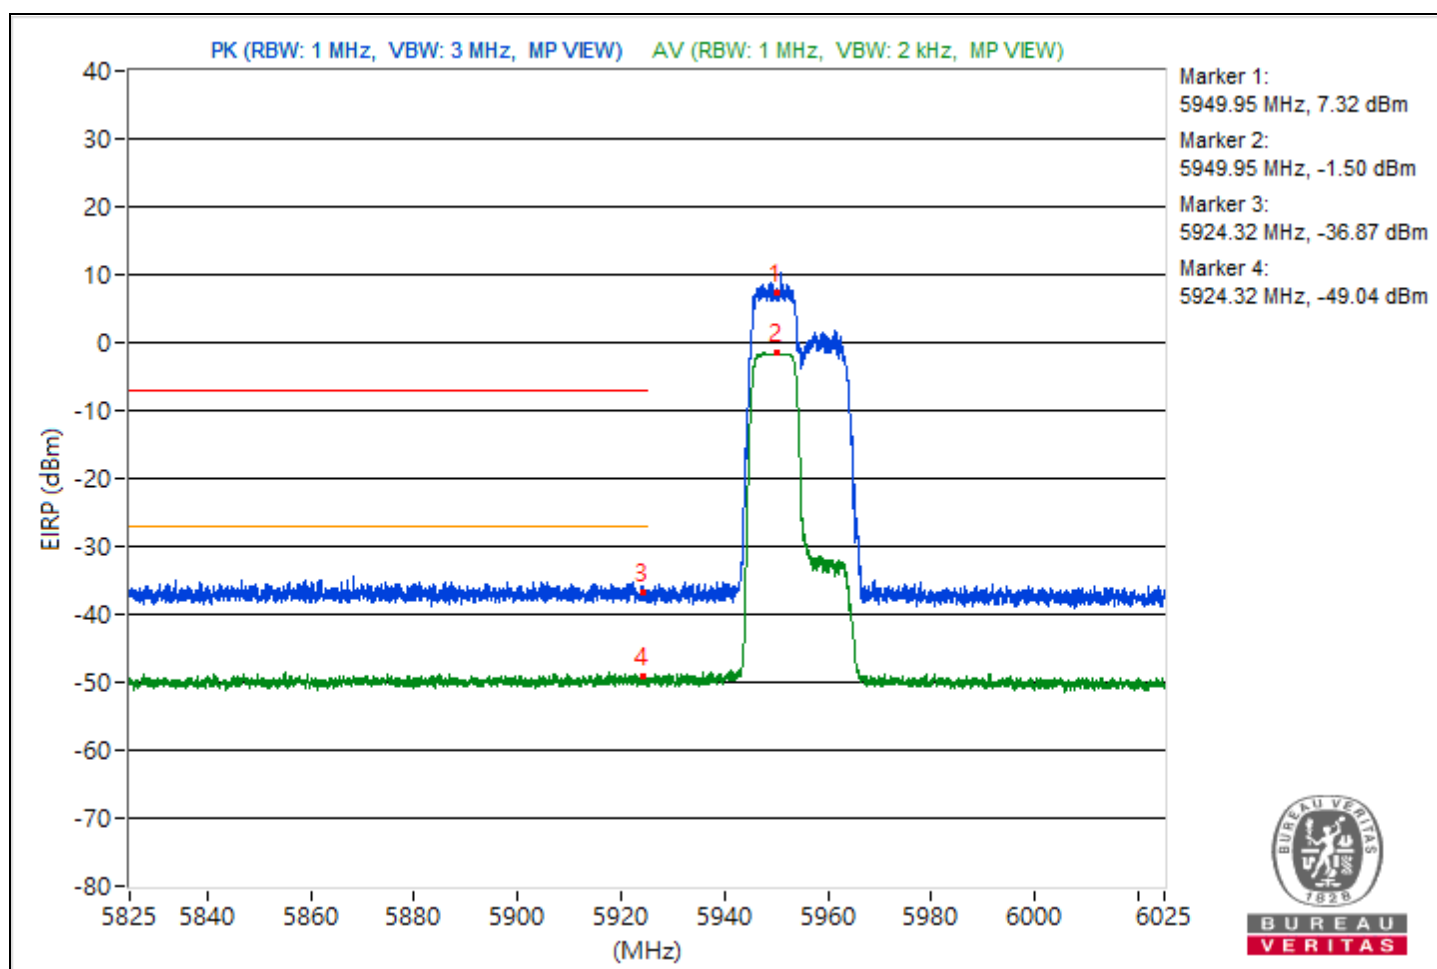

|                          |                              |           |                   |
|--------------------------|------------------------------|-----------|-------------------|
| RF Mode                  | 802.11be (EHT20) 106-tone RU | Channel   | CH 233 : 7115 MHz |
| Environmental Conditions | 25°C, 60% RH                 | Tested By | Dolly Chung       |


| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | #7125           | 74.8 PK                 | 88.26          | -13.46      | -31.32                  | -32.44                  | 8.37                   | -20.46           |
| 2                   | #7125           | 59.47 AV                | 68.26          | -8.79       | -47.18                  | -47.16                  | 8.37                   | -35.79           |

#### Notes:


1. Margin value = Emission Level - Limit value.
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

#### For Integration method:

##### Chain 0

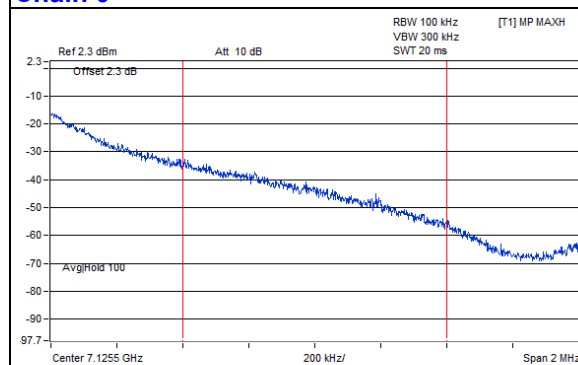


Peak

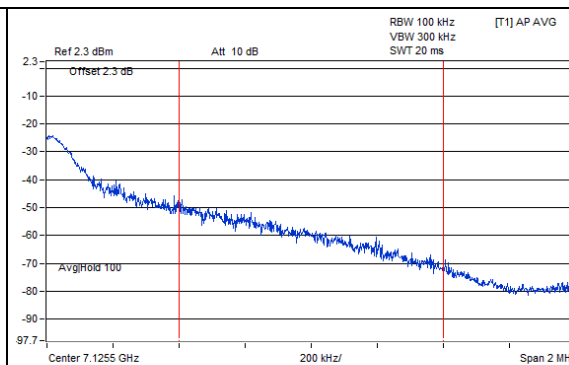


Average

##### Chain 1

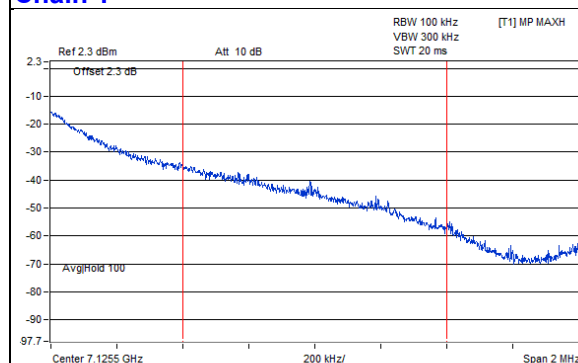

Peak

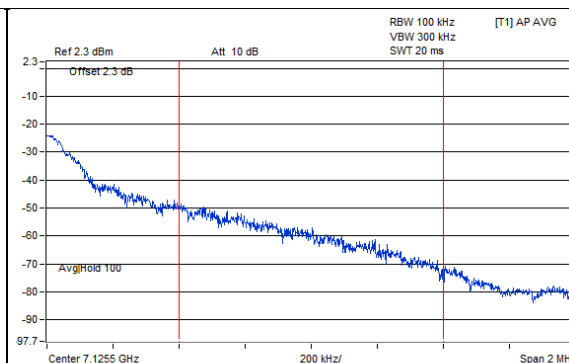


Average

|                 |                                |                          |                 |
|-----------------|--------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz          | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                    |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5950.87        | 106.67 PK               |                |             | -1.73                   | 1.28                    | 8.37                   | 11.41            |
| 2                   | *5950.87        | 95.74 AV                |                |             | -12.31                  | -9.83                   | 8.37                   | 0.48             |
| 3                   | #5834.62        | 58.72 PK                | 88.26          | -29.54      | -48.03                  | -47.81                  | 8.37                   | -36.54           |
| 4                   | #5834.62        | 46.73 AV                | 68.26          | -21.53      | -59.1                   | -60.89                  | 8.37                   | -48.53           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

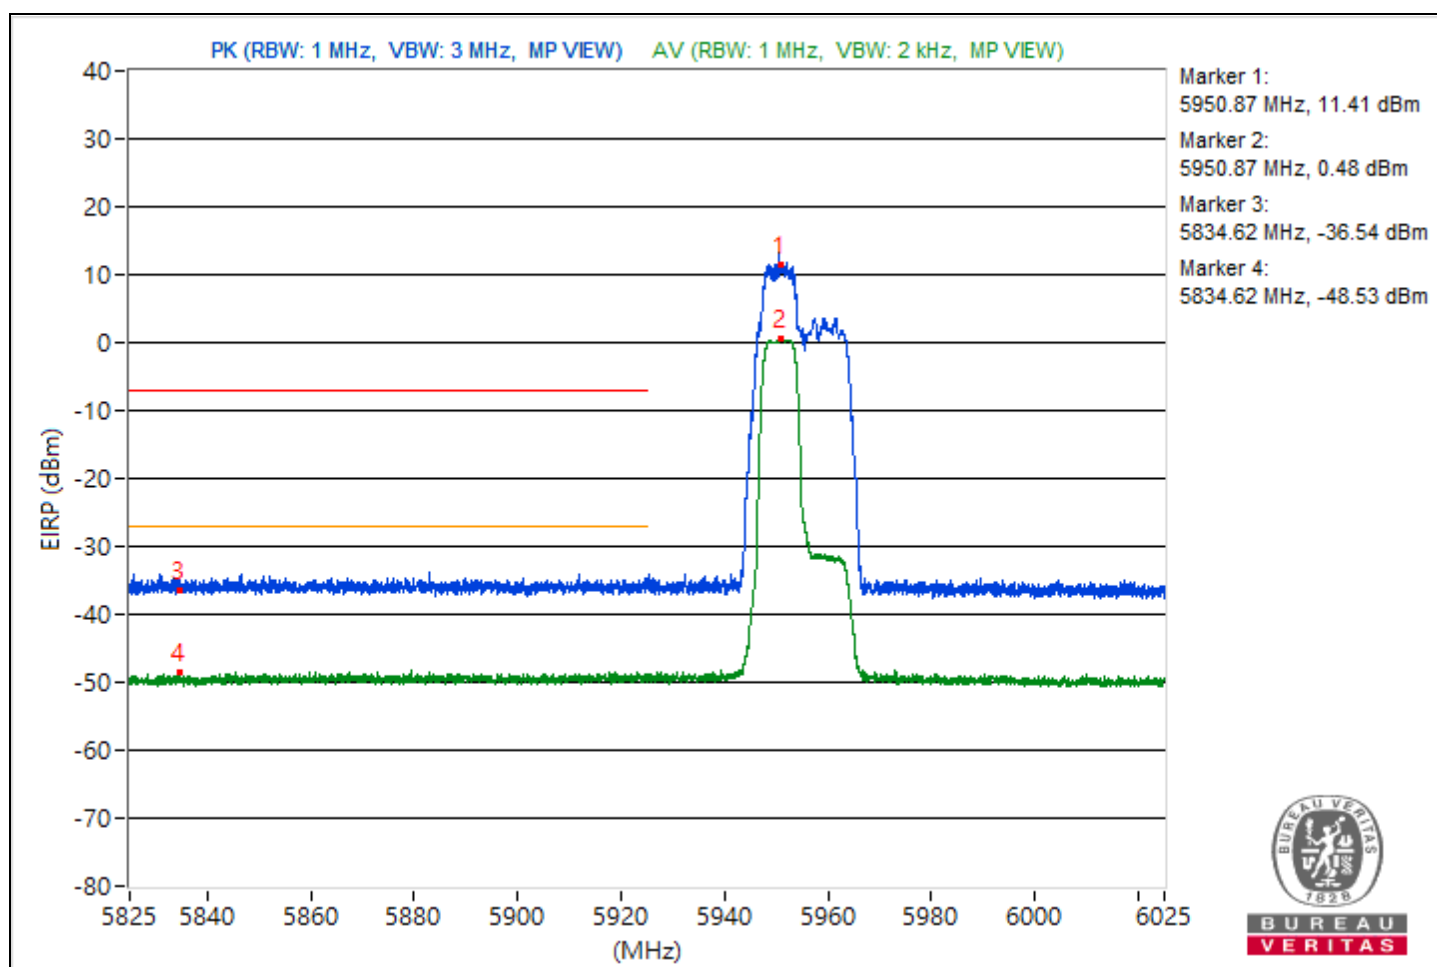


|                 |                                |                          |                   |
|-----------------|--------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 233 : 7115 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz            | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                    |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *7118.62        | 102.69 PK               |                |             | -3.18                   | -4.89                   | 8.37                   | 7.43             |
| 2                   | *7118.62        | 93.54 AV                |                |             | -12.85                  | -13.36                  | 8.37                   | -1.72            |
| 3                   | #7125.05        | 76.11 PK                | 88.26          | -12.15      | -29.45                  | -31.98                  | 8.37                   | -19.15           |
| 4                   | #7125.05        | 50.65 AV                | 68.26          | -17.61      | -55.87                  | -56.11                  | 8.37                   | -44.61           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

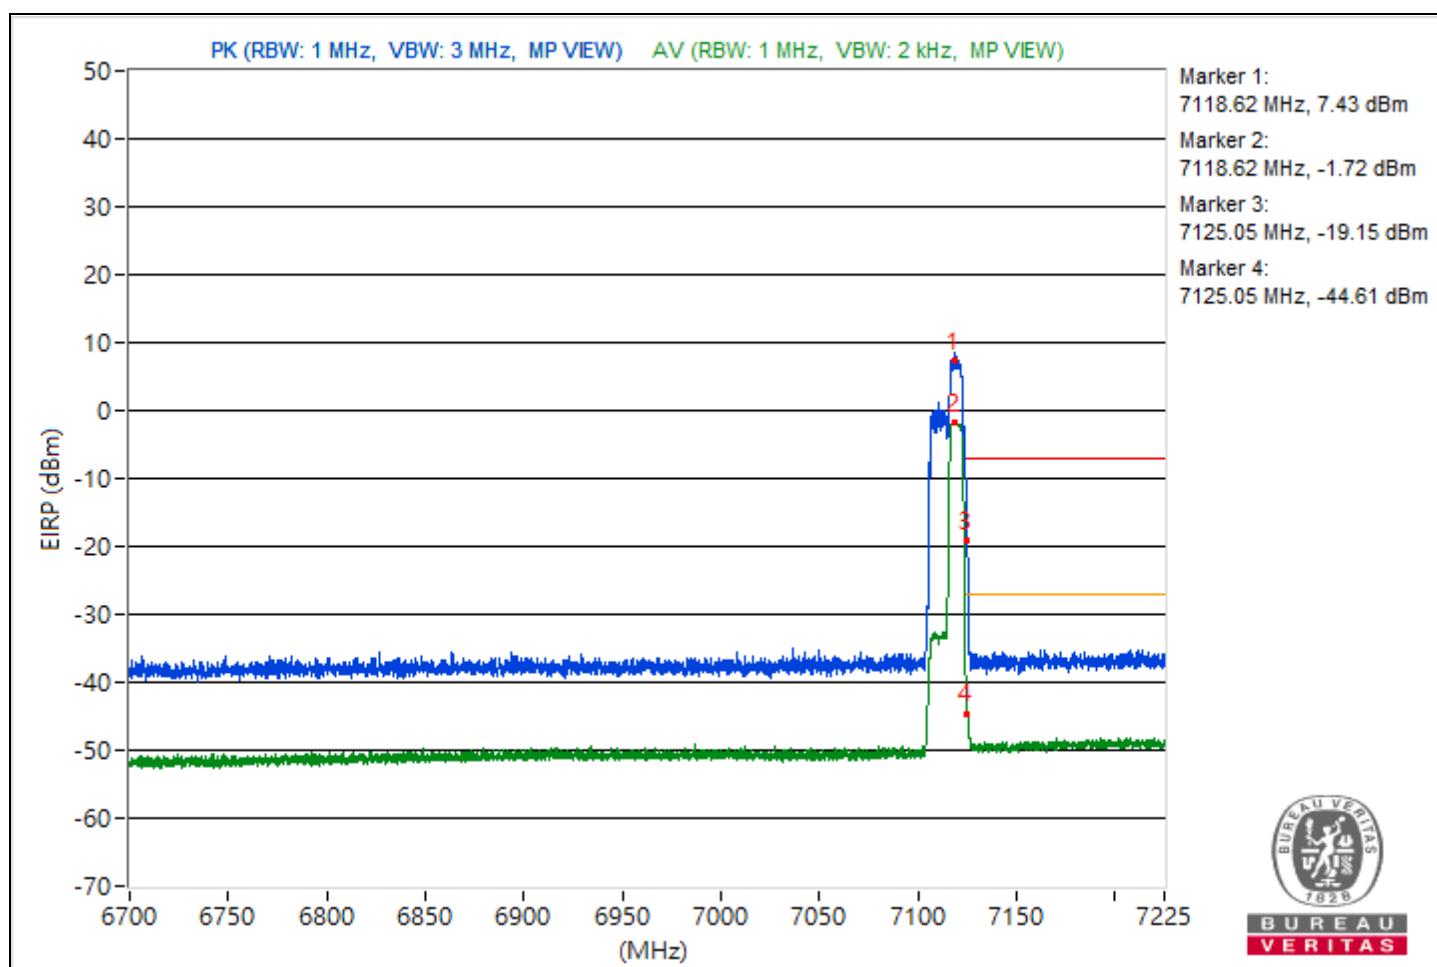


|                 |                                 |                          |                 |
|-----------------|---------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz           | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                     |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5953.9         | 102.2 PK                |                |             | -3.87                   | -5.1                    | 8.37                   | 6.94             |
| 2                   | *5953.9         | 93.85 AV                |                |             | -12.53                  | -13.07                  | 8.37                   | -1.41            |
| 3                   | #5913.68        | 58.6 PK                 | 88.26          | -29.66      | -48.64                  | -47.51                  | 8.37                   | -36.66           |
| 4                   | #5913.68        | 46.86 AV                | 68.26          | -21.4       | -59.34                  | -60.28                  | 8.37                   | -48.4            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

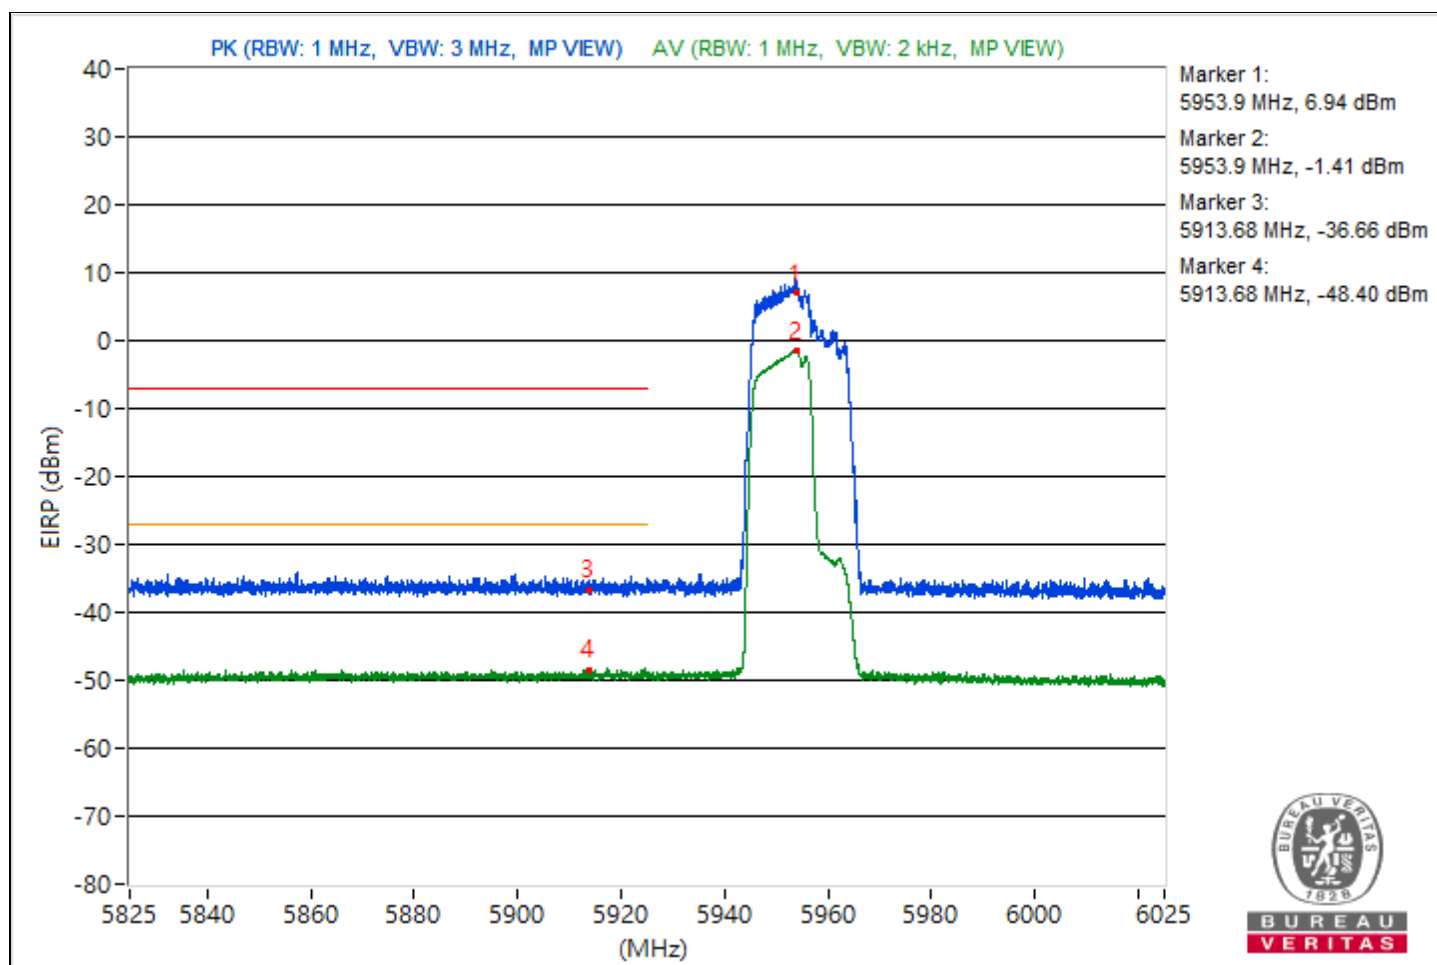

|                          |                                 |           |                   |
|--------------------------|---------------------------------|-----------|-------------------|
| RF Mode                  | 802.11be (EHT20) 106+26-tone RU | Channel   | CH 233 : 7115 MHz |
| Environmental Conditions | 25°C, 60% RH                    | Tested By | Dolly Chung       |


| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | #7125           | 71.09 PK                | 88.26          | -17.17      | -34.99                  | -36.2                   | 8.37                   | -24.17           |
| 2                   | #7125           | 55.79 AV                | 68.26          | -12.47      | -50.72                  | -50.98                  | 8.37                   | -39.47           |

Notes:


1. Margin value = Emission Level - Limit value.
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

For Integration method:

#### Chain 0

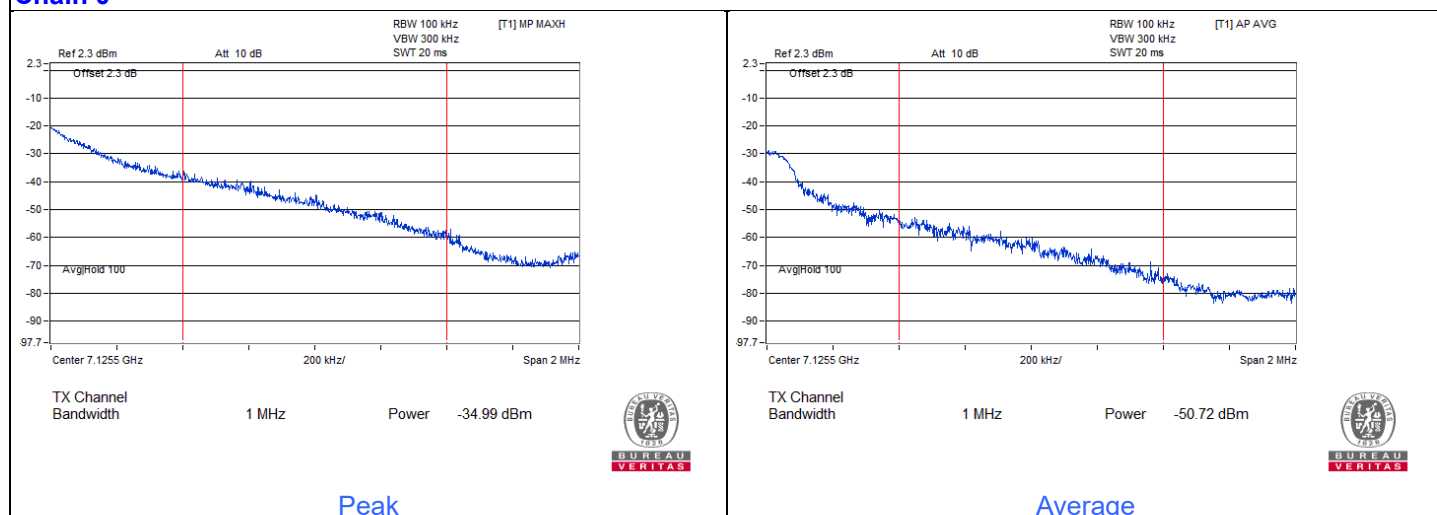

#### Chain 1

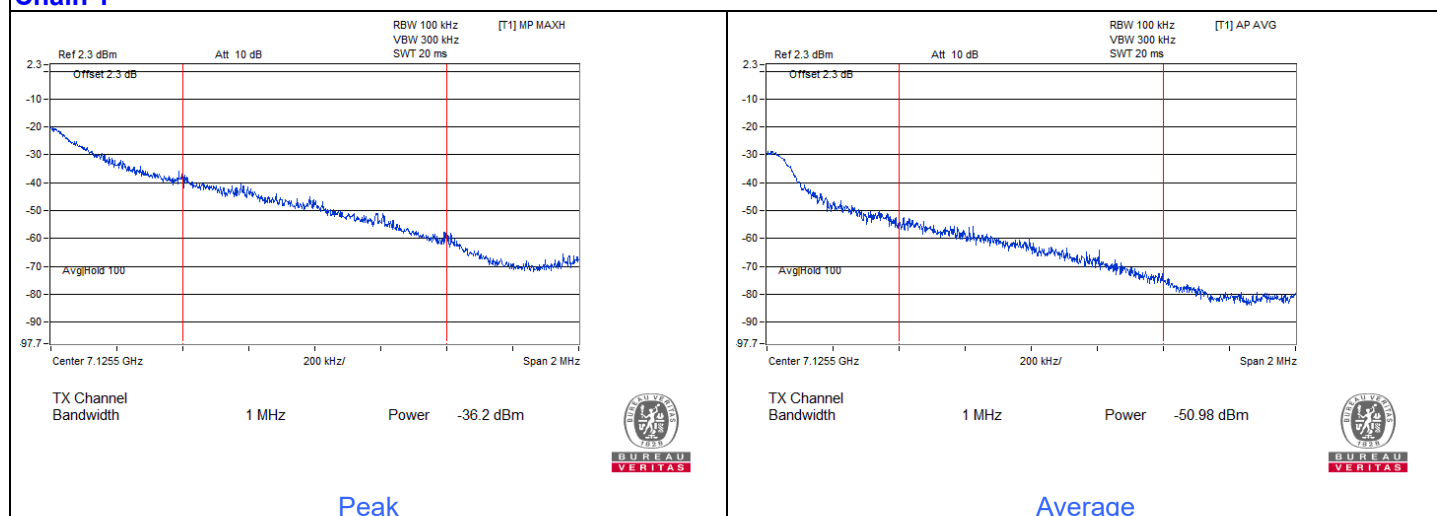


|                 |                                   |                          |                 |
|-----------------|-----------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 7 : 5985 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz             | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                       |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5982           | 102.23 PK               |                |             | -4.52                   | -4.3                    | 8.37                   | 6.97             |
| 2                   | *5982           | 93.44 AV                |                |             | -13.55                  | -12.87                  | 8.37                   | -1.82            |
| 3                   | #5891.75        | 58.58 PK                | 88.26          | -29.68      | -49.21                  | -47.15                  | 8.37                   | -36.68           |
| 4                   | #5891.75        | 47.54 AV                | 68.26          | -20.72      | -58.62                  | -59.65                  | 8.37                   | -47.72           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

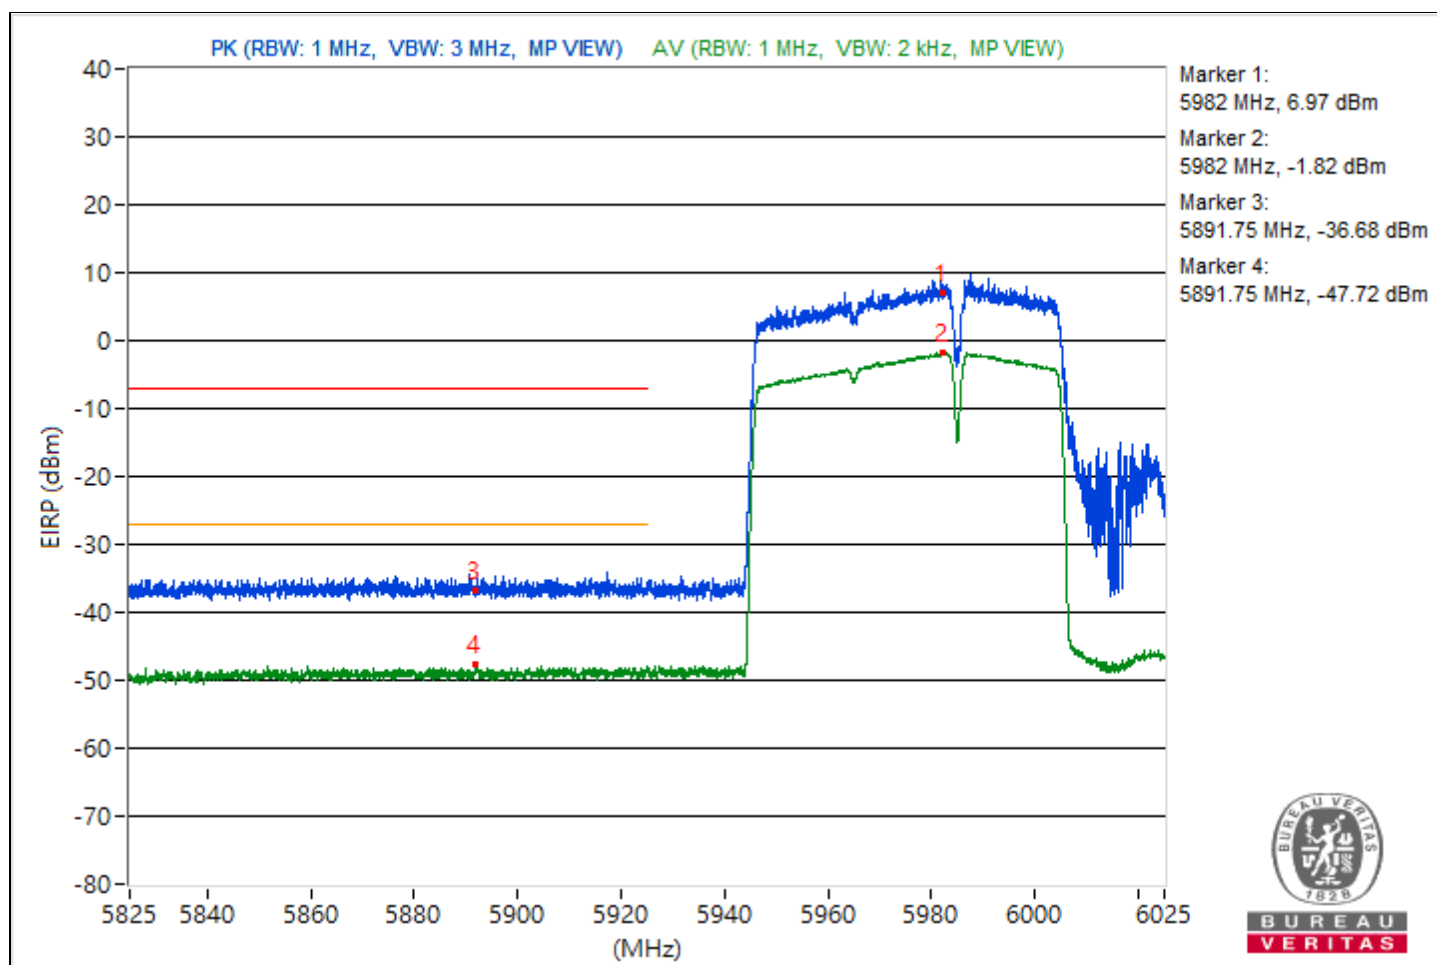


|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 215 : 7025 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz               | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                       |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *7027.07        | 103.62 PK               |                |             | -2.71                   | -3.36                   | 8.37                   | 8.36             |
| 2                   | *7027.07        | 93.76 AV                |                |             | -12.98                  | -12.78                  | 8.37                   | -1.5             |
| 3                   | #7201.11        | 59.64 PK                | 88.26          | -28.62      | -46.63                  | -47.4                   | 8.37                   | -35.62           |
| 4                   | #7201.11        | 48 AV                   | 68.26          | -20.26      | -58.21                  | -59.12                  | 8.37                   | -47.26           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

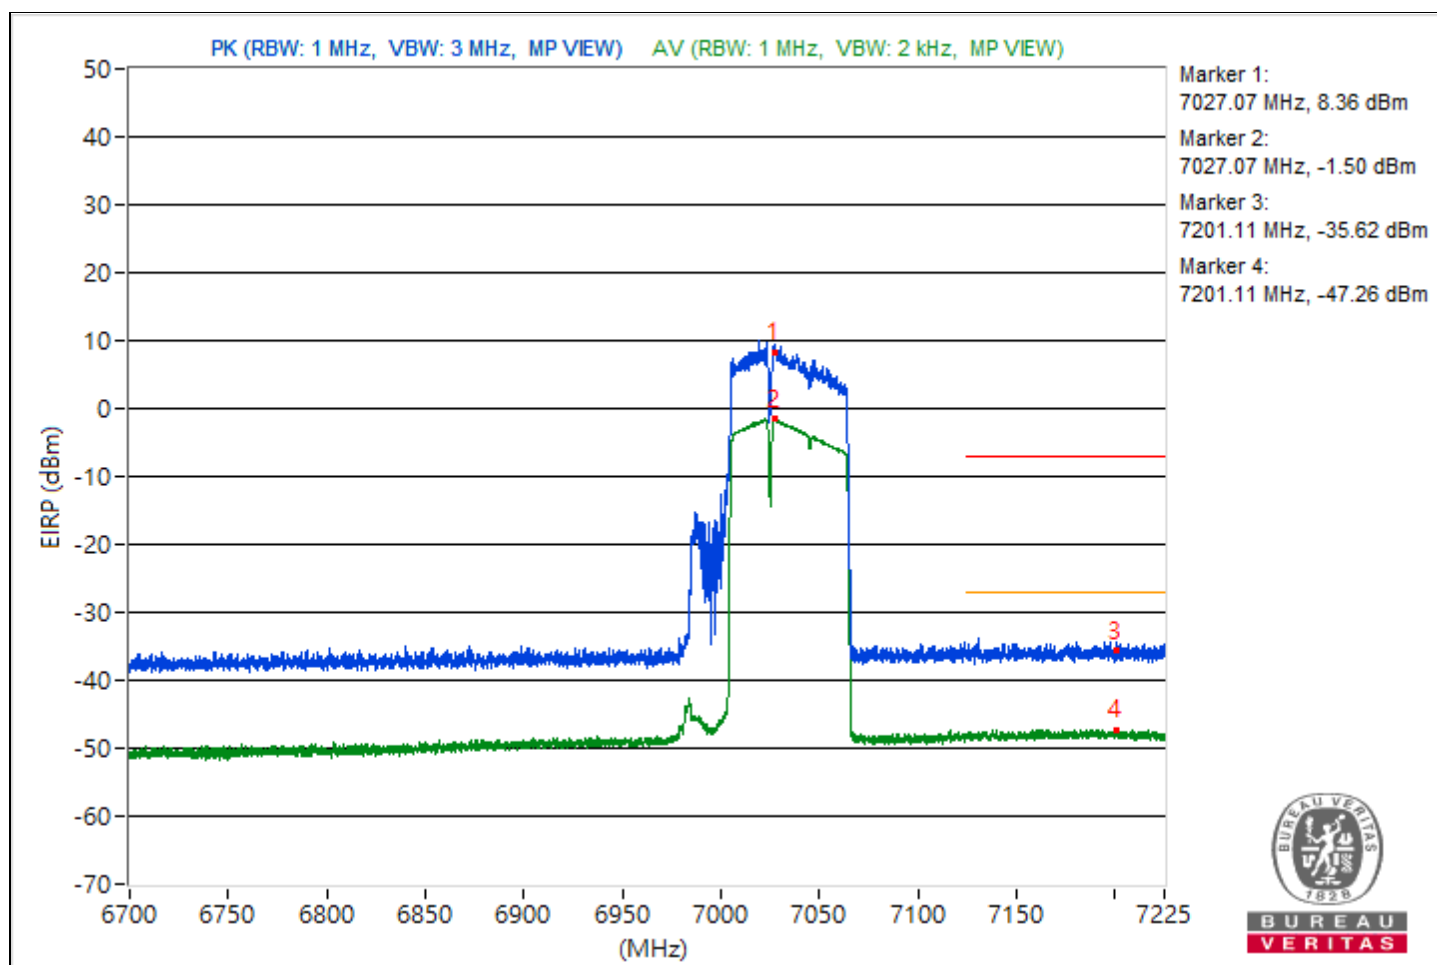


|                 |                                    |                          |                  |
|-----------------|------------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 15 : 6025 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz              | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                        |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6022.98        | 100.14 PK               |                |             | -6.92                   | -6.11                   | 8.37                   | 4.88             |
| 2                   | *6022.98        | 92.97 AV                |                |             | -13.45                  | -13.89                  | 8.37                   | -2.29            |
| 3                   | #5902.27        | 58.08 PK                | 88.26          | -30.18      | -48.99                  | -48.16                  | 8.37                   | -37.18           |
| 4                   | #5902.27        | 50.06 AV                | 68.26          | -18.2       | -56.28                  | -56.9                   | 8.37                   | -45.2            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

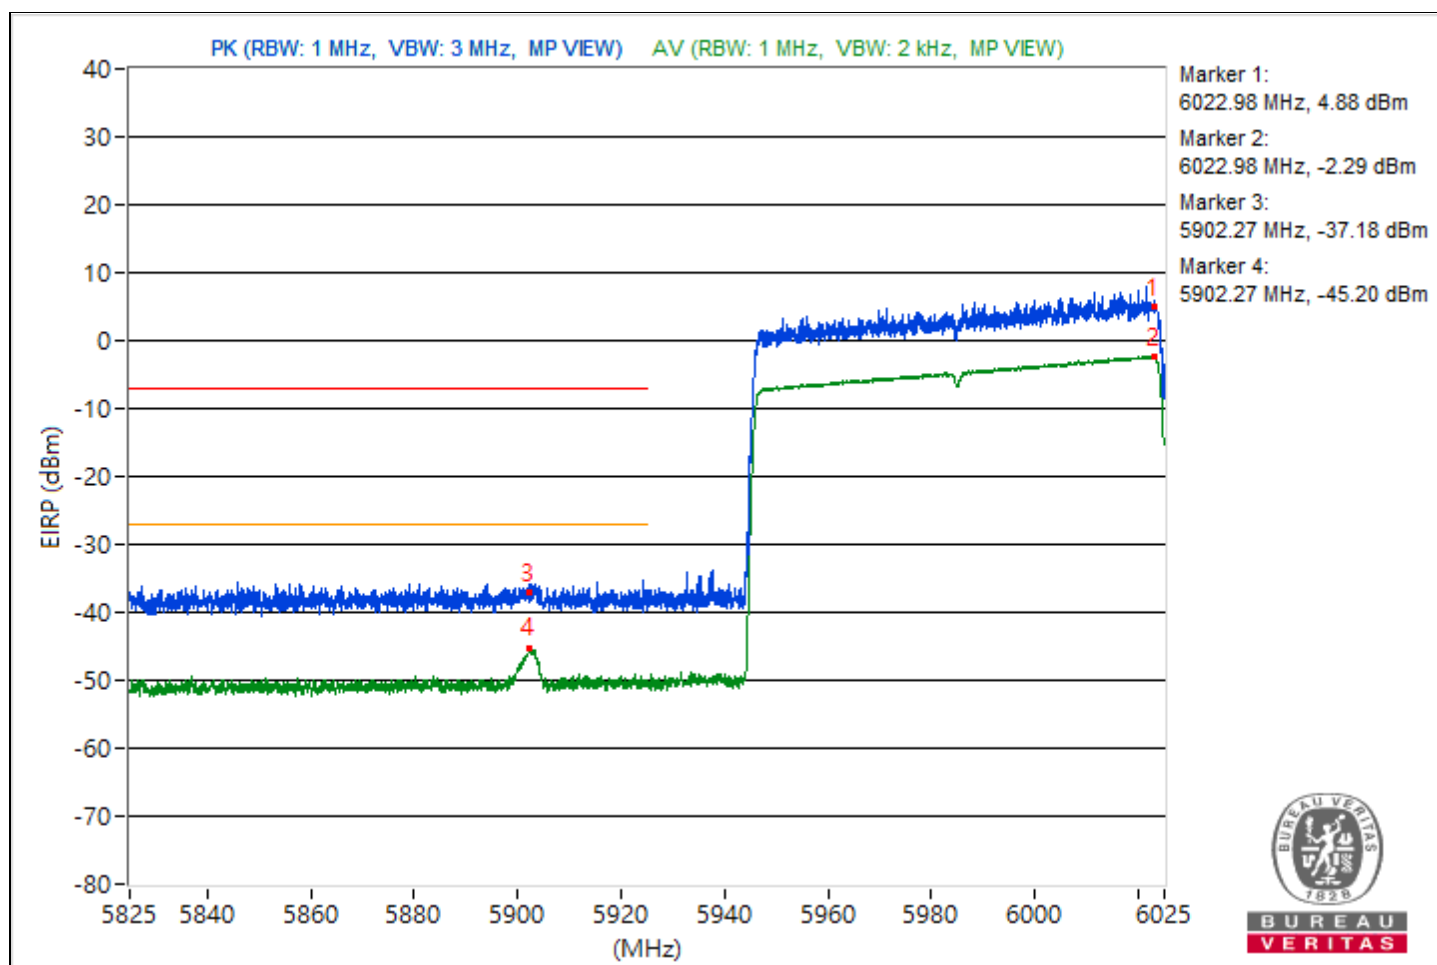


|                 |                                    |                          |                   |
|-----------------|------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 207 : 6985 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz                | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                        |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6987.44        | 100.15 PK               |                |             | -7.04                   | -6                      | 8.37                   | 4.89             |
| 2                   | *6987.44        | 92.72 AV                |                |             | -14.1                   | -13.76                  | 8.37                   | -2.54            |
| 3                   | #7158.98        | 55.87 PK                | 88.26          | -32.39      | -51.12                  | -50.45                  | 8.37                   | -39.39           |
| 4                   | #7158.98        | 45.87 AV                | 68.26          | -22.39      | -62.45                  | -59.56                  | 8.37                   | -49.39           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

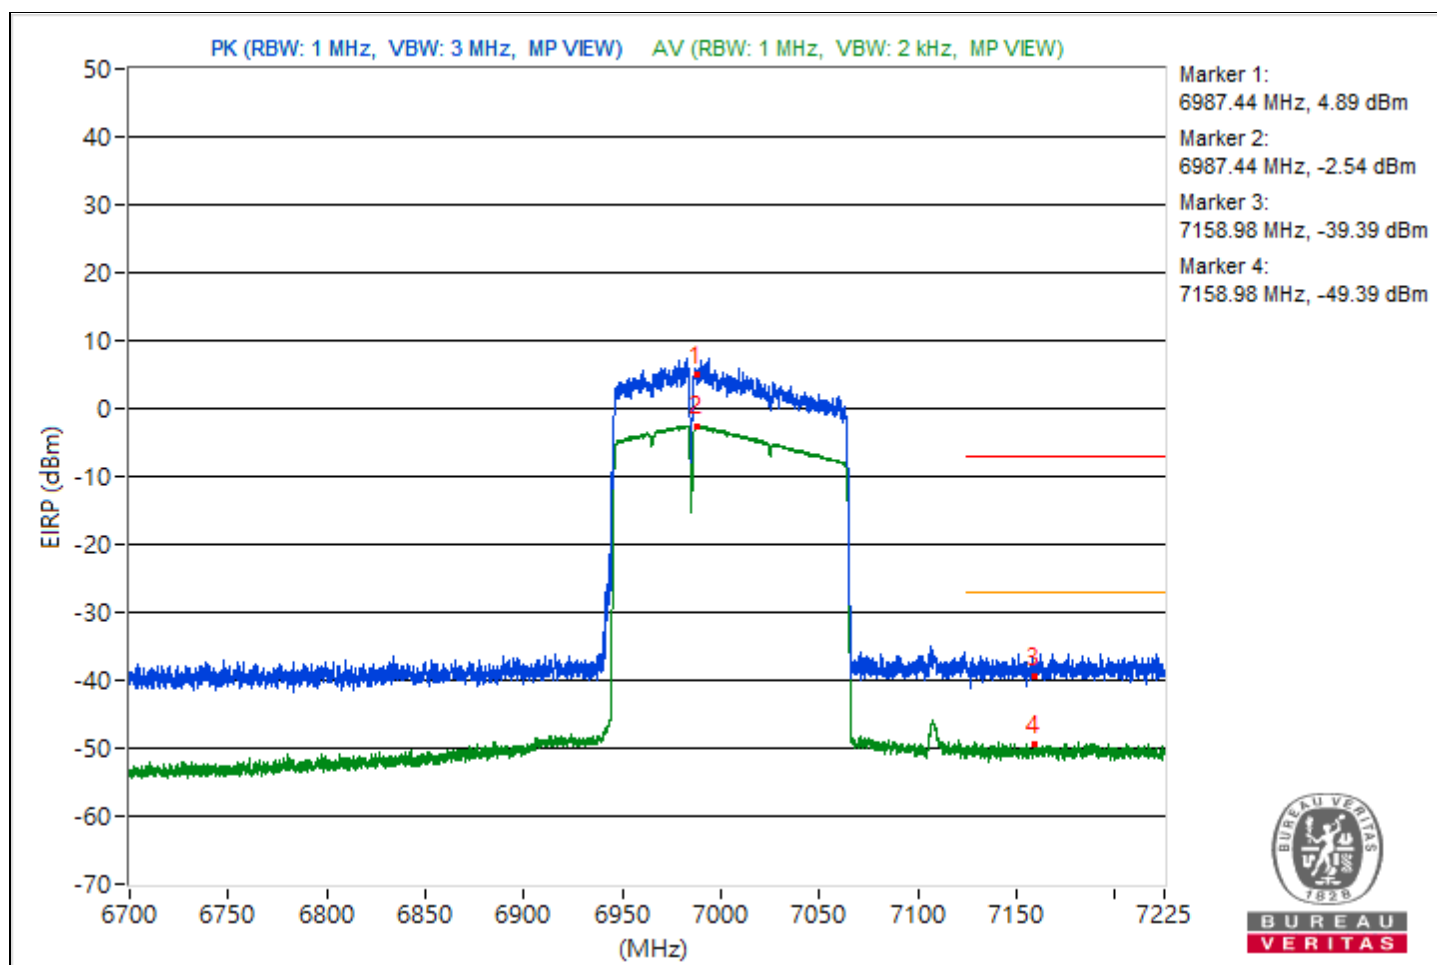


|                 |                                        |                          |                  |
|-----------------|----------------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 15 : 6025 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz                  | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                            |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6022.8         | 99.46 PK                |                |             | -7.51                   | -6.88                   | 8.37                   | 4.2              |
| 2                   | *6022.8         | 92.69 AV                |                |             | -14.02                  | -13.89                  | 8.37                   | -2.57            |
| 3                   | #5921.5         | 59.83 PK                | 88.26          | -28.43      | -47.93                  | -45.92                  | 8.37                   | -35.43           |
| 4                   | #5921.5         | 45.81 AV                | 68.26          | -22.45      | -61.97                  | -59.93                  | 8.37                   | -49.45           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

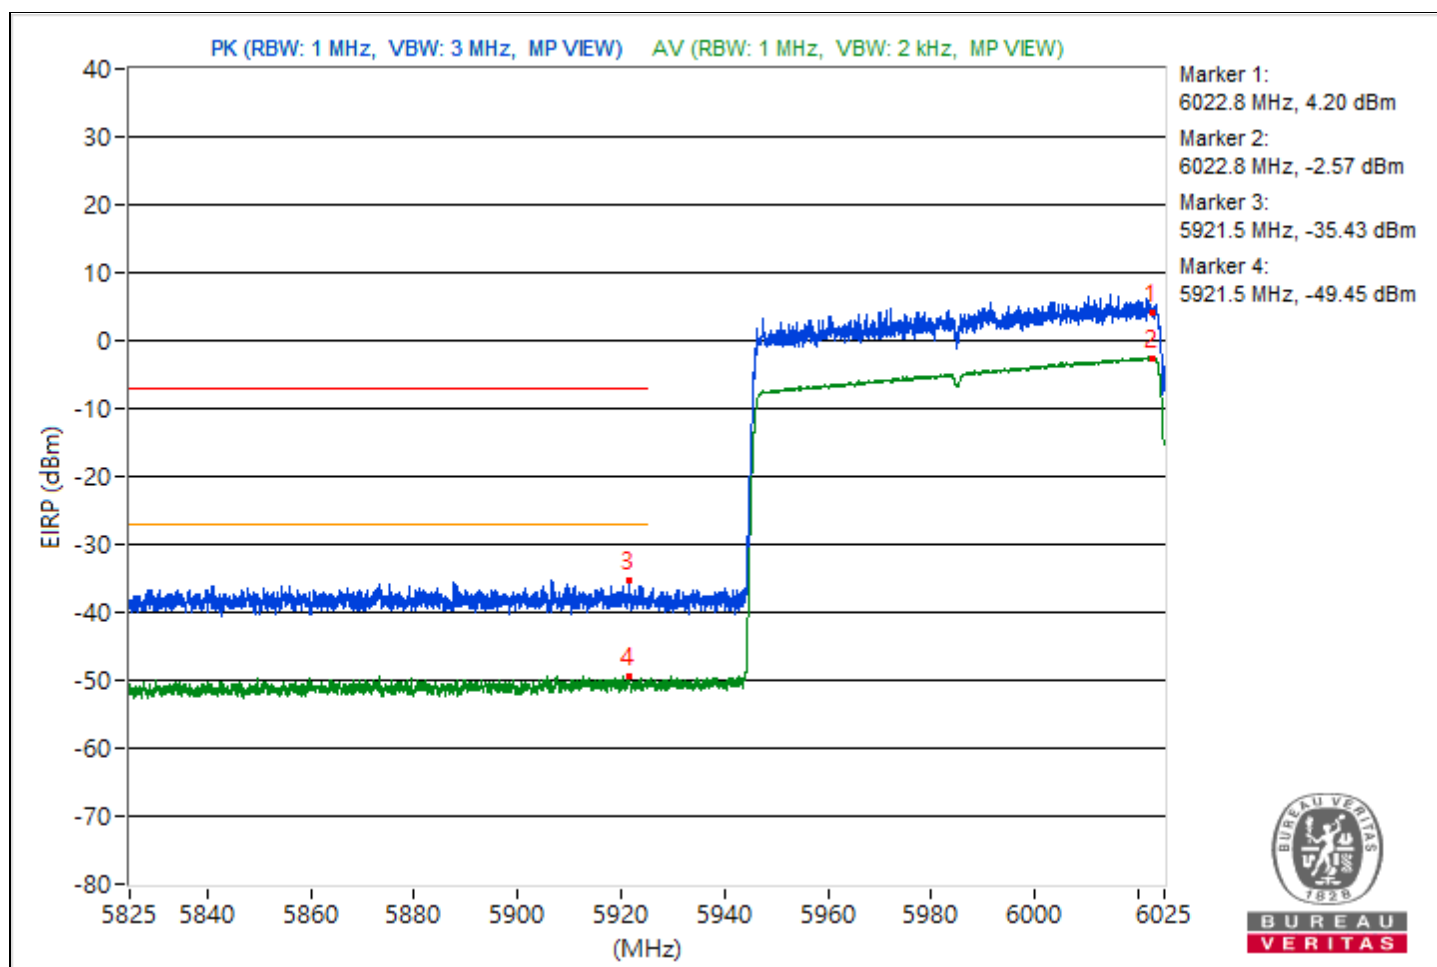


|                 |                                        |                          |                   |
|-----------------|----------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 207 : 6985 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz                    | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                            |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6986.85        | 100.74 PK               |                |             | -5.99                   | -5.82                   | 8.37                   | 5.48             |
| 2                   | *6986.85        | 93.29 AV                |                |             | -13.25                  | -13.45                  | 8.37                   | -1.97            |
| 3                   | #7146.97        | 56.7 PK                 | 88.26          | -31.56      | -50.71                  | -49.28                  | 8.37                   | -38.56           |
| 4                   | #7146.97        | 46.47 AV                | 68.26          | -21.79      | -59.58                  | -60.85                  | 8.37                   | -48.79           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

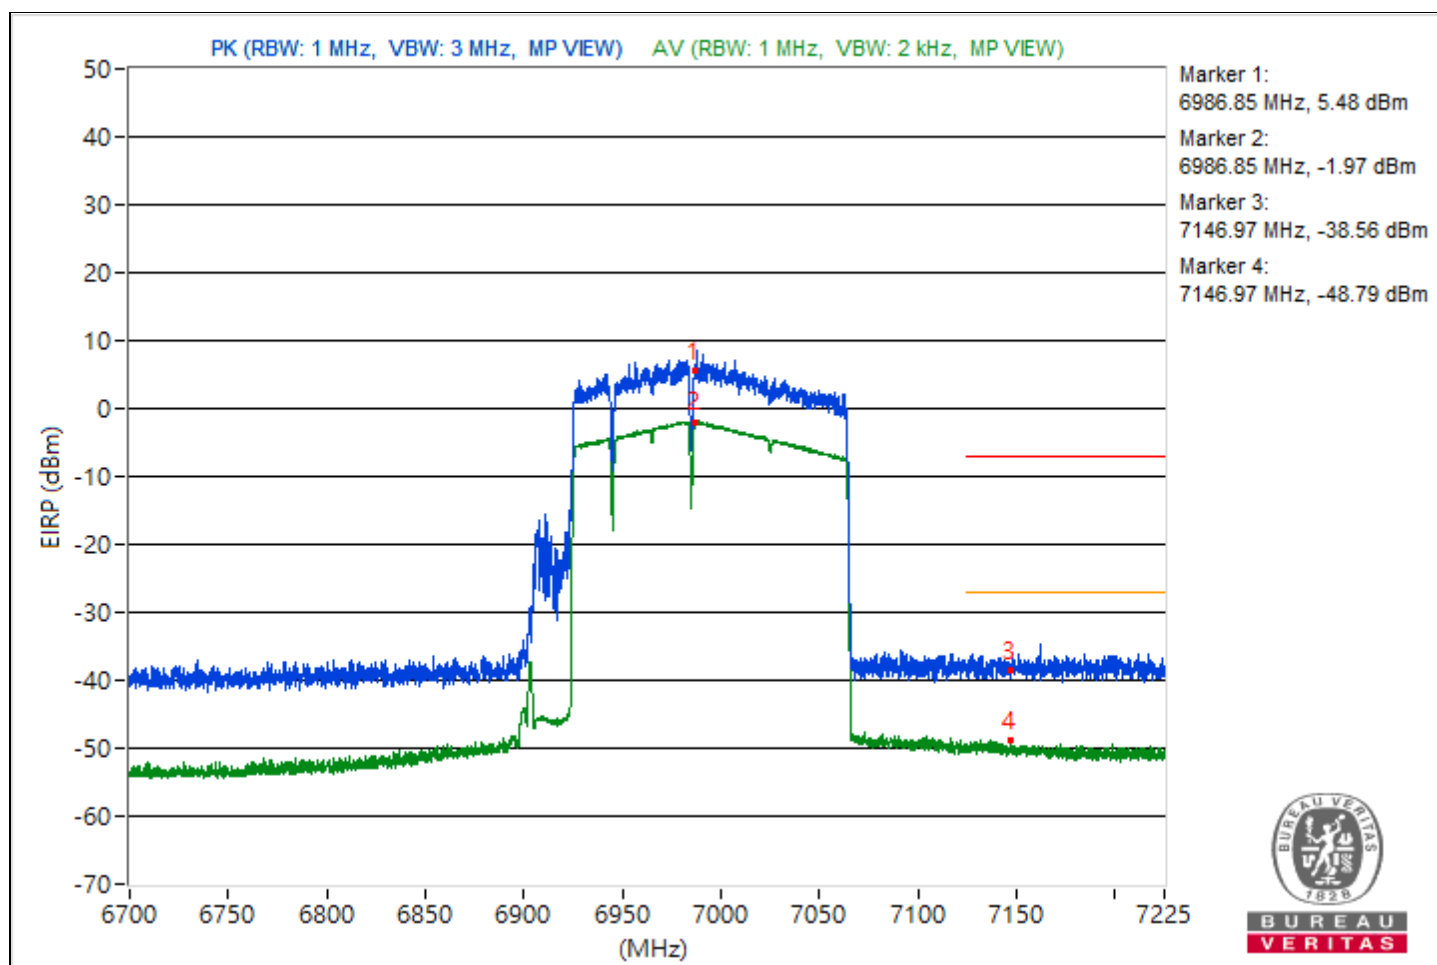

## Mode B

### 1TX

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 1 : 5955 MHz                                                       |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 49.8 PK                 | 74.0           | -24.2       | 2.85 H             | 85                   | 37.6             | 12.2                     |
| 2                                                    | 11910.00        | 39.1 AV                 | 54.0           | -14.9       | 2.85 H             | 85                   | 26.9             | 12.2                     |
| 3                                                    | 17865.00        | 54.6 PK                 | 74.0           | -19.4       | 1.42 H             | 235                  | 32.8             | 21.8                     |
| 4                                                    | 17865.00        | 43.9 AV                 | 54.0           | -10.1       | 1.42 H             | 235                  | 22.1             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.1 PK                 | 74.0           | -26.9       | 1.97 V             | 211                  | 34.9             | 12.2                     |
| 2                                                    | 11910.00        | 37.8 AV                 | 54.0           | -16.2       | 1.97 V             | 211                  | 25.6             | 12.2                     |
| 3                                                    | 17865.00        | 55.1 PK                 | 74.0           | -18.9       | 1.74 V             | 58                   | 33.3             | 21.8                     |
| 4                                                    | 17865.00        | 41.6 AV                 | 54.0           | -12.4       | 1.74 V             | 58                   | 19.8             | 21.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 45 : 6175 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 50.0 PK                 | 74.0           | -24.0       | 2.88 H             | 87                   | 37.6             | 12.4                     |
| 2                                                    | 12350.00        | 39.5 AV                 | 54.0           | -14.5       | 2.88 H             | 87                   | 27.1             | 12.4                     |
| 3                                                    | 18525.00        | 54.5 PK                 | 74.0           | -19.5       | 1.45 H             | 229                  | 59.2             | -4.7                     |
| 4                                                    | 18525.00        | 43.9 AV                 | 54.0           | -10.1       | 1.45 H             | 229                  | 48.6             | -4.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.3 PK                 | 74.0           | -26.7       | 1.99 V             | 225                  | 34.9             | 12.4                     |
| 2                                                    | 12350.00        | 38.0 AV                 | 54.0           | -16.0       | 1.99 V             | 225                  | 25.6             | 12.4                     |
| 3                                                    | 18525.00        | 54.6 PK                 | 74.0           | -19.4       | 1.75 V             | 59                   | 59.3             | -4.7                     |
| 4                                                    | 18525.00        | 41.2 AV                 | 54.0           | -12.8       | 1.75 V             | 59                   | 45.9             | -4.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 93 : 6415 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 49.7 PK                 | 88.2           | -38.5       | 2.89 H             | 91                   | 36.6             | 13.1                     |
| 2                                                    | #12830.00       | 39.2 AV                 | 68.2           | -29.0       | 2.89 H             | 91                   | 26.1             | 13.1                     |
| 3                                                    | 19245.00        | 55.3 PK                 | 74.0           | -18.7       | 1.47 H             | 240                  | 59.3             | -4.0                     |
| 4                                                    | 19245.00        | 44.3 AV                 | 54.0           | -9.7        | 1.47 H             | 240                  | 48.3             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.5 PK                 | 88.2           | -40.7       | 2.00 V             | 217                  | 34.4             | 13.1                     |
| 2                                                    | #12830.00       | 38.2 AV                 | 68.2           | -30.0       | 2.00 V             | 217                  | 25.1             | 13.1                     |
| 3                                                    | 19245.00        | 54.5 PK                 | 74.0           | -19.5       | 1.77 V             | 49                   | 58.5             | -4.0                     |
| 4                                                    | 19245.00        | 41.2 AV                 | 54.0           | -12.8       | 1.77 V             | 49                   | 45.2             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 97 : 6435 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 49.2 PK                 | 88.2           | -39.0       | 2.84 H             | 85                   | 35.9             | 13.3                     |
| 2                                                    | #12870.00       | 38.7 AV                 | 68.2           | -29.5       | 2.84 H             | 85                   | 25.4             | 13.3                     |
| 3                                                    | 19305.00        | 54.9 PK                 | 74.0           | -19.1       | 1.46 H             | 227                  | 58.8             | -3.9                     |
| 4                                                    | 19305.00        | 44.1 AV                 | 54.0           | -9.9        | 1.46 H             | 227                  | 48.0             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 46.8 PK                 | 88.2           | -41.4       | 1.94 V             | 203                  | 33.5             | 13.3                     |
| 2                                                    | #12870.00       | 37.3 AV                 | 68.2           | -30.9       | 1.94 V             | 203                  | 24.0             | 13.3                     |
| 3                                                    | 19305.00        | 55.1 PK                 | 74.0           | -18.9       | 1.79 V             | 43                   | 59.0             | -3.9                     |
| 4                                                    | 19305.00        | 41.7 AV                 | 54.0           | -12.3       | 1.79 V             | 43                   | 45.6             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 105 : 6475 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12950.00       | 50.1 PK                 | 88.2           | -38.1       | 2.80 H             | 92                   | 36.8             | 13.3                     |
| 2                                                    | #12950.00       | 39.1 AV                 | 68.2           | -29.1       | 2.80 H             | 92                   | 25.8             | 13.3                     |
| 3                                                    | 19425.00        | 54.6 PK                 | 74.0           | -19.4       | 1.46 H             | 246                  | 58.1             | -3.5                     |
| 4                                                    | 19425.00        | 43.9 AV                 | 54.0           | -10.1       | 1.46 H             | 246                  | 47.4             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12950.00       | 47.4 PK                 | 88.2           | -40.8       | 1.98 V             | 208                  | 34.1             | 13.3                     |
| 2                                                    | #12950.00       | 38.3 AV                 | 68.2           | -29.9       | 1.98 V             | 208                  | 25.0             | 13.3                     |
| 3                                                    | 19425.00        | 54.9 PK                 | 74.0           | -19.1       | 1.75 V             | 57                   | 58.4             | -3.5                     |
| 4                                                    | 19425.00        | 41.5 AV                 | 54.0           | -12.5       | 1.75 V             | 57                   | 45.0             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 113 : 6515 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 49.3 PK                 | 88.2           | -38.9       | 2.84 H             | 79                   | 36.0             | 13.3                     |
| 2                                                    | #13030.00       | 38.8 AV                 | 68.2           | -29.4       | 2.84 H             | 79                   | 25.5             | 13.3                     |
| 3                                                    | 19545.00        | 54.6 PK                 | 74.0           | -19.4       | 1.42 H             | 249                  | 58.3             | -3.7                     |
| 4                                                    | 19545.00        | 43.8 AV                 | 54.0           | -10.2       | 1.42 H             | 249                  | 47.5             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 47.0 PK                 | 88.2           | -41.2       | 2.03 V             | 219                  | 33.7             | 13.3                     |
| 2                                                    | #13030.00       | 37.9 AV                 | 68.2           | -30.3       | 2.03 V             | 219                  | 24.6             | 13.3                     |
| 3                                                    | 19545.00        | 55.6 PK                 | 74.0           | -18.4       | 1.79 V             | 58                   | 59.3             | -3.7                     |
| 4                                                    | 19545.00        | 41.9 AV                 | 54.0           | -12.1       | 1.79 V             | 58                   | 45.6             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 117 : 6535 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 50.1 PK                 | 88.2           | -38.1       | 2.87 H             | 99                   | 36.8             | 13.3                     |
| 2                                                    | #13070.00       | 39.3 AV                 | 68.2           | -28.9       | 2.87 H             | 99                   | 26.0             | 13.3                     |
| 3                                                    | 19605.00        | 54.8 PK                 | 74.0           | -19.2       | 1.43 H             | 248                  | 58.8             | -4.0                     |
| 4                                                    | 19605.00        | 44.3 AV                 | 54.0           | -9.7        | 1.43 H             | 248                  | 48.3             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.1 PK                 | 88.2           | -41.1       | 2.03 V             | 226                  | 33.8             | 13.3                     |
| 2                                                    | #13070.00       | 37.6 AV                 | 68.2           | -30.6       | 2.03 V             | 226                  | 24.3             | 13.3                     |
| 3                                                    | 19605.00        | 55.6 PK                 | 74.0           | -18.4       | 1.70 V             | 43                   | 59.6             | -4.0                     |
| 4                                                    | 19605.00        | 42.1 AV                 | 54.0           | -11.9       | 1.70 V             | 43                   | 46.1             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 149 : 6695 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 50.2 PK                 | 74.0           | -23.8       | 2.81 H             | 94                   | 36.1             | 14.1                     |
| 2                                                    | 13390.00        | 39.5 AV                 | 54.0           | -14.5       | 2.81 H             | 94                   | 25.4             | 14.1                     |
| 3                                                    | 20085.00        | 54.2 PK                 | 74.0           | -19.8       | 1.36 H             | 227                  | 57.6             | -3.4                     |
| 4                                                    | 20085.00        | 43.7 AV                 | 54.0           | -10.3       | 1.36 H             | 227                  | 47.1             | -3.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 46.8 PK                 | 74.0           | -27.2       | 2.01 V             | 204                  | 32.7             | 14.1                     |
| 2                                                    | 13390.00        | 37.4 AV                 | 54.0           | -16.6       | 2.01 V             | 204                  | 23.3             | 14.1                     |
| 3                                                    | 20085.00        | 55.1 PK                 | 74.0           | -18.9       | 1.75 V             | 71                   | 58.5             | -3.4                     |
| 4                                                    | 20085.00        | 41.5 AV                 | 54.0           | -12.5       | 1.75 V             | 71                   | 44.9             | -3.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 181 : 6855 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 49.6 PK                 | 88.2           | -38.6       | 2.83 H             | 84                   | 34.4             | 15.2                     |
| 2                                                    | #13710.00       | 39.2 AV                 | 68.2           | -29.0       | 2.83 H             | 84                   | 24.0             | 15.2                     |
| 3                                                    | 20565.00        | 54.4 PK                 | 74.0           | -19.6       | 1.38 H             | 227                  | 57.6             | -3.2                     |
| 4                                                    | 20565.00        | 43.9 AV                 | 54.0           | -10.1       | 1.38 H             | 227                  | 47.1             | -3.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.3 PK                 | 88.2           | -40.9       | 1.94 V             | 220                  | 32.1             | 15.2                     |
| 2                                                    | #13710.00       | 37.9 AV                 | 68.2           | -30.3       | 1.94 V             | 220                  | 22.7             | 15.2                     |
| 3                                                    | 20565.00        | 54.5 PK                 | 74.0           | -19.5       | 1.80 V             | 72                   | 57.7             | -3.2                     |
| 4                                                    | 20565.00        | 41.2 AV                 | 54.0           | -12.8       | 1.80 V             | 72                   | 44.4             | -3.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 185 : 6875 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 49.5 PK                 | 88.2           | -38.7       | 2.83 H             | 100                  | 34.3             | 15.2                     |
| 2                                                    | #13750.00       | 38.9 AV                 | 68.2           | -29.3       | 2.83 H             | 100                  | 23.7             | 15.2                     |
| 3                                                    | 20625.00        | 54.6 PK                 | 74.0           | -19.4       | 1.43 H             | 242                  | 57.9             | -3.3                     |
| 4                                                    | 20625.00        | 43.8 AV                 | 54.0           | -10.2       | 1.43 H             | 242                  | 47.1             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 47.3 PK                 | 88.2           | -40.9       | 1.97 V             | 215                  | 32.1             | 15.2                     |
| 2                                                    | #13750.00       | 38.1 AV                 | 68.2           | -30.1       | 1.97 V             | 215                  | 22.9             | 15.2                     |
| 3                                                    | 20625.00        | 55.0 PK                 | 74.0           | -19.0       | 1.70 V             | 50                   | 58.3             | -3.3                     |
| 4                                                    | 20625.00        | 41.7 AV                 | 54.0           | -12.3       | 1.70 V             | 50                   | 45.0             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 209 : 6995 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 49.9 PK                 | 88.2           | -38.3       | 2.87 H             | 103                  | 34.5             | 15.4                     |
| 2                                                    | #13990.00       | 39.1 AV                 | 68.2           | -29.1       | 2.87 H             | 103                  | 23.7             | 15.4                     |
| 3                                                    | 20985.00        | 54.7 PK                 | 74.0           | -19.3       | 1.50 H             | 262                  | 57.4             | -2.7                     |
| 4                                                    | 20985.00        | 43.7 AV                 | 54.0           | -10.3       | 1.50 H             | 262                  | 46.4             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 47.4 PK                 | 88.2           | -40.8       | 1.94 V             | 218                  | 32.0             | 15.4                     |
| 2                                                    | #13990.00       | 38.2 AV                 | 68.2           | -30.0       | 1.94 V             | 218                  | 22.8             | 15.4                     |
| 3                                                    | 20985.00        | 55.0 PK                 | 74.0           | -19.0       | 1.75 V             | 61                   | 57.7             | -2.7                     |
| 4                                                    | 20985.00        | 41.7 AV                 | 54.0           | -12.3       | 1.75 V             | 61                   | 44.4             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 233 : 7115 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 49.6 PK                 | 88.2           | -38.6       | 2.88 H             | 78                   | 34.3             | 15.3                     |
| 2                                                    | #14230.00       | 38.7 AV                 | 68.2           | -29.5       | 2.88 H             | 78                   | 23.4             | 15.3                     |
| 3                                                    | 21345.00        | 54.8 PK                 | 74.0           | -19.2       | 1.45 H             | 245                  | 57.0             | -2.2                     |
| 4                                                    | 21345.00        | 43.9 AV                 | 54.0           | -10.1       | 1.45 H             | 245                  | 46.1             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 47.1 PK                 | 88.2           | -41.1       | 1.95 V             | 216                  | 31.8             | 15.3                     |
| 2                                                    | #14230.00       | 37.9 AV                 | 68.2           | -30.3       | 1.95 V             | 216                  | 22.6             | 15.3                     |
| 3                                                    | 21345.00        | 54.9 PK                 | 74.0           | -19.1       | 1.79 V             | 65                   | 57.1             | -2.2                     |
| 4                                                    | 21345.00        | 41.4 AV                 | 54.0           | -12.6       | 1.79 V             | 65                   | 43.6             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

**1S1T**

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 49.6 PK                 | 74.0           | -24.4       | 2.84 H             | 86                   | 37.4             | 12.2                     |
| 2                                                    | 11910.00        | 38.6 AV                 | 54.0           | -15.4       | 2.84 H             | 86                   | 26.4             | 12.2                     |
| 3                                                    | 17865.00        | 53.7 PK                 | 74.0           | -20.3       | 1.40 H             | 262                  | 31.9             | 21.8                     |
| 4                                                    | 17865.00        | 43.4 AV                 | 54.0           | -10.6       | 1.40 H             | 262                  | 21.6             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.0 PK                 | 74.0           | -27.0       | 1.98 V             | 193                  | 34.8             | 12.2                     |
| 2                                                    | 11910.00        | 38.0 AV                 | 54.0           | -16.0       | 1.98 V             | 193                  | 25.8             | 12.2                     |
| 3                                                    | 17865.00        | 54.8 PK                 | 74.0           | -19.2       | 1.66 V             | 55                   | 33.0             | 21.8                     |
| 4                                                    | 17865.00        | 41.0 AV                 | 54.0           | -13.0       | 1.66 V             | 55                   | 19.2             | 21.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 45 : 6175 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 49.8 PK                 | 74.0           | -24.2       | 2.85 H             | 82                   | 37.4             | 12.4                     |
| 2                                                    | 12350.00        | 39.0 AV                 | 54.0           | -15.0       | 2.85 H             | 82                   | 26.6             | 12.4                     |
| 3                                                    | 18525.00        | 53.7 PK                 | 74.0           | -20.3       | 1.46 H             | 269                  | 58.4             | -4.7                     |
| 4                                                    | 18525.00        | 43.5 AV                 | 54.0           | -10.5       | 1.46 H             | 269                  | 48.2             | -4.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.4 PK                 | 74.0           | -26.6       | 2.00 V             | 189                  | 35.0             | 12.4                     |
| 2                                                    | 12350.00        | 38.4 AV                 | 54.0           | -15.6       | 2.00 V             | 189                  | 26.0             | 12.4                     |
| 3                                                    | 18525.00        | 54.5 PK                 | 74.0           | -19.5       | 1.75 V             | 70                   | 59.2             | -4.7                     |
| 4                                                    | 18525.00        | 40.9 AV                 | 54.0           | -13.1       | 1.75 V             | 70                   | 45.6             | -4.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 49.4 PK                 | 88.2           | -38.8       | 2.84 H             | 87                   | 36.3             | 13.1                     |
| 2                                                    | #12830.00       | 38.4 AV                 | 68.2           | -29.8       | 2.84 H             | 87                   | 25.3             | 13.1                     |
| 3                                                    | 19245.00        | 54.1 PK                 | 74.0           | -19.9       | 1.45 H             | 271                  | 58.1             | -4.0                     |
| 4                                                    | 19245.00        | 43.9 AV                 | 54.0           | -10.1       | 1.45 H             | 271                  | 47.9             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 48.1 PK                 | 88.2           | -40.1       | 1.96 V             | 194                  | 35.0             | 13.1                     |
| 2                                                    | #12830.00       | 38.9 AV                 | 68.2           | -29.3       | 1.96 V             | 194                  | 25.8             | 13.1                     |
| 3                                                    | 19245.00        | 55.3 PK                 | 74.0           | -18.7       | 1.64 V             | 61                   | 59.3             | -4.0                     |
| 4                                                    | 19245.00        | 41.6 AV                 | 54.0           | -12.4       | 1.64 V             | 61                   | 45.6             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 97 : 6435 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 49.4 PK                 | 88.2           | -38.8       | 2.92 H             | 66                   | 36.1             | 13.3                     |
| 2                                                    | #12870.00       | 38.5 AV                 | 68.2           | -29.7       | 2.92 H             | 66                   | 25.2             | 13.3                     |
| 3                                                    | 19305.00        | 54.9 PK                 | 74.0           | -19.1       | 1.46 H             | 263                  | 58.8             | -3.9                     |
| 4                                                    | 19305.00        | 44.4 AV                 | 54.0           | -9.6        | 1.46 H             | 263                  | 48.3             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 47.2 PK                 | 88.2           | -41.0       | 1.97 V             | 205                  | 33.9             | 13.3                     |
| 2                                                    | #12870.00       | 38.2 AV                 | 68.2           | -30.0       | 1.97 V             | 205                  | 24.9             | 13.3                     |
| 3                                                    | 19305.00        | 55.0 PK                 | 74.0           | -19.0       | 1.64 V             | 57                   | 58.9             | -3.9                     |
| 4                                                    | 19305.00        | 41.6 AV                 | 54.0           | -12.4       | 1.64 V             | 57                   | 45.5             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                      |                  |                               |                                                                      |
|----------------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode              | 802.11be (EHT20) | Channel                       | CH 105 : 6475 MHz                                                    |
| Frequency Range      | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions      | 23 °C, 72 % RH                                                       |
| Tested By            | Willy Lin        |                               |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12950.00       | 50.3 PK                 | 88.2           | -37.9       | 2.89 H             | 60                   | 37.0             | 13.3                     |
| 2                                                    | #12950.00       | 39.1 AV                 | 68.2           | -29.1       | 2.89 H             | 60                   | 25.8             | 13.3                     |
| 3                                                    | 19425.00        | 54.5 PK                 | 74.0           | -19.5       | 1.45 H             | 264                  | 58.0             | -3.5                     |
| 4                                                    | 19425.00        | 44.2 AV                 | 54.0           | -9.8        | 1.45 H             | 264                  | 47.7             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12950.00       | 46.9 PK                 | 88.2           | -41.3       | 1.96 V             | 200                  | 33.6             | 13.3                     |
| 2                                                    | #12950.00       | 38.1 AV                 | 68.2           | -30.1       | 1.96 V             | 200                  | 24.8             | 13.3                     |
| 3                                                    | 19425.00        | 54.6 PK                 | 74.0           | -19.4       | 1.69 V             | 64                   | 58.1             | -3.5                     |
| 4                                                    | 19425.00        | 40.8 AV                 | 54.0           | -13.2       | 1.69 V             | 64                   | 44.3             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 113 : 6515 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 49.5 PK                 | 88.2           | -38.7       | 2.90 H             | 77                   | 36.2             | 13.3                     |
| 2                                                    | #13030.00       | 38.6 AV                 | 68.2           | -29.6       | 2.90 H             | 77                   | 25.3             | 13.3                     |
| 3                                                    | 19545.00        | 54.3 PK                 | 74.0           | -19.7       | 1.45 H             | 250                  | 58.0             | -3.7                     |
| 4                                                    | 19545.00        | 43.6 AV                 | 54.0           | -10.4       | 1.45 H             | 250                  | 47.3             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 47.8 PK                 | 88.2           | -40.4       | 1.96 V             | 211                  | 34.5             | 13.3                     |
| 2                                                    | #13030.00       | 38.9 AV                 | 68.2           | -29.3       | 1.96 V             | 211                  | 25.6             | 13.3                     |
| 3                                                    | 19545.00        | 54.9 PK                 | 74.0           | -19.1       | 1.73 V             | 50                   | 58.6             | -3.7                     |
| 4                                                    | 19545.00        | 41.2 AV                 | 54.0           | -12.8       | 1.73 V             | 50                   | 44.9             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 50.1 PK                 | 88.2           | -38.1       | 2.89 H             | 63                   | 36.8             | 13.3                     |
| 2                                                    | #13070.00       | 38.8 AV                 | 68.2           | -29.4       | 2.89 H             | 63                   | 25.5             | 13.3                     |
| 3                                                    | 19605.00        | 54.6 PK                 | 74.0           | -19.4       | 1.39 H             | 251                  | 58.6             | -4.0                     |
| 4                                                    | 19605.00        | 44.3 AV                 | 54.0           | -9.7        | 1.39 H             | 251                  | 48.3             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.8 PK                 | 88.2           | -40.4       | 1.97 V             | 203                  | 34.5             | 13.3                     |
| 2                                                    | #13070.00       | 38.9 AV                 | 68.2           | -29.3       | 1.97 V             | 203                  | 25.6             | 13.3                     |
| 3                                                    | 19605.00        | 55.2 PK                 | 74.0           | -18.8       | 1.69 V             | 49                   | 59.2             | -4.0                     |
| 4                                                    | 19605.00        | 41.5 AV                 | 54.0           | -12.5       | 1.69 V             | 49                   | 45.5             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 149 : 6695 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 49.4 PK                 | 74.0           | -24.6       | 2.92 H             | 67                   | 35.3             | 14.1                     |
| 2                                                    | 13390.00        | 38.5 AV                 | 54.0           | -15.5       | 2.92 H             | 67                   | 24.4             | 14.1                     |
| 3                                                    | 20085.00        | 54.0 PK                 | 74.0           | -20.0       | 1.44 H             | 264                  | 57.4             | -3.4                     |
| 4                                                    | 20085.00        | 43.9 AV                 | 54.0           | -10.1       | 1.44 H             | 264                  | 47.3             | -3.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 47.8 PK                 | 74.0           | -26.2       | 2.06 V             | 215                  | 33.7             | 14.1                     |
| 2                                                    | 13390.00        | 38.9 AV                 | 54.0           | -15.1       | 2.06 V             | 215                  | 24.8             | 14.1                     |
| 3                                                    | 20085.00        | 55.2 PK                 | 74.0           | -18.8       | 1.64 V             | 70                   | 58.6             | -3.4                     |
| 4                                                    | 20085.00        | 41.6 AV                 | 54.0           | -12.4       | 1.64 V             | 70                   | 45.0             | -3.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 181 : 6855 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 49.0 PK                 | 88.2           | -39.2       | 2.92 H             | 65                   | 33.8             | 15.2                     |
| 2                                                    | #13710.00       | 38.3 AV                 | 68.2           | -29.9       | 2.92 H             | 65                   | 23.1             | 15.2                     |
| 3                                                    | 20565.00        | 54.4 PK                 | 74.0           | -19.6       | 1.47 H             | 259                  | 57.6             | -3.2                     |
| 4                                                    | 20565.00        | 44.2 AV                 | 54.0           | -9.8        | 1.47 H             | 259                  | 47.4             | -3.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.7 PK                 | 88.2           | -40.5       | 2.05 V             | 213                  | 32.5             | 15.2                     |
| 2                                                    | #13710.00       | 38.9 AV                 | 68.2           | -29.3       | 2.05 V             | 213                  | 23.7             | 15.2                     |
| 3                                                    | 20565.00        | 54.5 PK                 | 74.0           | -19.5       | 1.72 V             | 50                   | 57.7             | -3.2                     |
| 4                                                    | 20565.00        | 41.1 AV                 | 54.0           | -12.9       | 1.72 V             | 50                   | 44.3             | -3.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 185 : 6875 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 50.2 PK                 | 88.2           | -38.0       | 2.82 H             | 80                   | 35.0             | 15.2                     |
| 2                                                    | #13750.00       | 39.0 AV                 | 68.2           | -29.2       | 2.82 H             | 80                   | 23.8             | 15.2                     |
| 3                                                    | 20625.00        | 53.7 PK                 | 74.0           | -20.3       | 1.40 H             | 273                  | 57.0             | -3.3                     |
| 4                                                    | 20625.00        | 43.5 AV                 | 54.0           | -10.5       | 1.40 H             | 273                  | 46.8             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 47.9 PK                 | 88.2           | -40.3       | 2.06 V             | 208                  | 32.7             | 15.2                     |
| 2                                                    | #13750.00       | 39.0 AV                 | 68.2           | -29.2       | 2.06 V             | 208                  | 23.8             | 15.2                     |
| 3                                                    | 20625.00        | 54.8 PK                 | 74.0           | -19.2       | 1.73 V             | 47                   | 58.1             | -3.3                     |
| 4                                                    | 20625.00        | 40.9 AV                 | 54.0           | -13.1       | 1.73 V             | 47                   | 44.2             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 209 : 6995 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 49.4 PK                 | 88.2           | -38.8       | 2.88 H             | 90                   | 34.0             | 15.4                     |
| 2                                                    | #13990.00       | 38.4 AV                 | 68.2           | -29.8       | 2.88 H             | 90                   | 23.0             | 15.4                     |
| 3                                                    | 20985.00        | 53.9 PK                 | 74.0           | -20.1       | 1.49 H             | 262                  | 56.6             | -2.7                     |
| 4                                                    | 20985.00        | 43.7 AV                 | 54.0           | -10.3       | 1.49 H             | 262                  | 46.4             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 48.0 PK                 | 88.2           | -40.2       | 1.96 V             | 217                  | 32.6             | 15.4                     |
| 2                                                    | #13990.00       | 38.7 AV                 | 68.2           | -29.5       | 1.96 V             | 217                  | 23.3             | 15.4                     |
| 3                                                    | 20985.00        | 55.0 PK                 | 74.0           | -19.0       | 1.66 V             | 56                   | 57.7             | -2.7                     |
| 4                                                    | 20985.00        | 41.4 AV                 | 54.0           | -12.6       | 1.66 V             | 56                   | 44.1             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 233 : 7115 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 50.1 PK                 | 88.2           | -38.1       | 2.82 H             | 64                   | 34.8             | 15.3                     |
| 2                                                    | #14230.00       | 39.0 AV                 | 68.2           | -29.2       | 2.82 H             | 64                   | 23.7             | 15.3                     |
| 3                                                    | 21345.00        | 54.1 PK                 | 74.0           | -19.9       | 1.45 H             | 257                  | 56.3             | -2.2                     |
| 4                                                    | 21345.00        | 43.7 AV                 | 54.0           | -10.3       | 1.45 H             | 257                  | 45.9             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 47.4 PK                 | 88.2           | -40.8       | 2.04 V             | 208                  | 32.1             | 15.3                     |
| 2                                                    | #14230.00       | 38.7 AV                 | 68.2           | -29.5       | 2.04 V             | 208                  | 23.4             | 15.3                     |
| 3                                                    | 21345.00        | 54.2 PK                 | 74.0           | -19.8       | 1.69 V             | 46                   | 56.4             | -2.2                     |
| 4                                                    | 21345.00        | 40.9 AV                 | 54.0           | -13.1       | 1.69 V             | 46                   | 43.1             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 3 : 5965 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11930.00        | 49.3 PK                 | 74.0           | -24.7       | 2.90 H             | 84                   | 37.1             | 12.2                     |
| 2                                                    | 11930.00        | 38.5 AV                 | 54.0           | -15.5       | 2.90 H             | 84                   | 26.3             | 12.2                     |
| 3                                                    | 17895.00        | 54.6 PK                 | 74.0           | -19.4       | 1.39 H             | 276                  | 32.3             | 22.3                     |
| 4                                                    | 17895.00        | 43.9 AV                 | 54.0           | -10.1       | 1.39 H             | 276                  | 21.6             | 22.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11930.00        | 46.9 PK                 | 74.0           | -27.1       | 2.00 V             | 212                  | 34.7             | 12.2                     |
| 2                                                    | 11930.00        | 38.0 AV                 | 54.0           | -16.0       | 2.00 V             | 212                  | 25.8             | 12.2                     |
| 3                                                    | 17895.00        | 55.0 PK                 | 74.0           | -19.0       | 1.71 V             | 58                   | 32.7             | 22.3                     |
| 4                                                    | 17895.00        | 41.3 AV                 | 54.0           | -12.7       | 1.71 V             | 58                   | 19.0             | 22.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 43 : 6165 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12330.00        | 49.8 PK                 | 74.0           | -24.2       | 2.84 H             | 78                   | 37.4             | 12.4                     |
| 2                                                    | 12330.00        | 38.9 AV                 | 54.0           | -15.1       | 2.84 H             | 78                   | 26.5             | 12.4                     |
| 3                                                    | 18495.00        | 54.2 PK                 | 74.0           | -19.8       | 1.43 H             | 263                  | 58.9             | -4.7                     |
| 4                                                    | 18495.00        | 44.0 AV                 | 54.0           | -10.0       | 1.43 H             | 263                  | 48.7             | -4.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12330.00        | 47.4 PK                 | 74.0           | -26.6       | 2.05 V             | 202                  | 35.0             | 12.4                     |
| 2                                                    | 12330.00        | 38.6 AV                 | 54.0           | -15.4       | 2.05 V             | 202                  | 26.2             | 12.4                     |
| 3                                                    | 18495.00        | 54.6 PK                 | 74.0           | -19.4       | 1.71 V             | 47                   | 59.3             | -4.7                     |
| 4                                                    | 18495.00        | 40.9 AV                 | 54.0           | -13.1       | 1.71 V             | 47                   | 45.6             | -4.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 91 : 6405 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12810.00       | 50.4 PK                 | 88.2           | -37.8       | 2.88 H             | 75                   | 37.3             | 13.1                     |
| 2                                                    | #12810.00       | 39.1 AV                 | 68.2           | -29.1       | 2.88 H             | 75                   | 26.0             | 13.1                     |
| 3                                                    | 19215.00        | 54.5 PK                 | 74.0           | -19.5       | 1.47 H             | 277                  | 58.7             | -4.2                     |
| 4                                                    | 19215.00        | 44.3 AV                 | 54.0           | -9.7        | 1.47 H             | 277                  | 48.5             | -4.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12810.00       | 47.3 PK                 | 88.2           | -40.9       | 2.01 V             | 199                  | 34.2             | 13.1                     |
| 2                                                    | #12810.00       | 38.5 AV                 | 68.2           | -29.7       | 2.01 V             | 199                  | 25.4             | 13.1                     |
| 3                                                    | 19215.00        | 55.1 PK                 | 74.0           | -18.9       | 1.72 V             | 52                   | 59.3             | -4.2                     |
| 4                                                    | 19215.00        | 41.5 AV                 | 54.0           | -12.5       | 1.72 V             | 52                   | 45.7             | -4.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 99 : 6445 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12890.00       | 50.1 PK                 | 88.2           | -38.1       | 2.86 H             | 63                   | 36.7             | 13.4                     |
| 2                                                    | #12890.00       | 39.1 AV                 | 68.2           | -29.1       | 2.86 H             | 63                   | 25.7             | 13.4                     |
| 3                                                    | 19335.00        | 53.6 PK                 | 74.0           | -20.4       | 1.38 H             | 268                  | 57.3             | -3.7                     |
| 4                                                    | 19335.00        | 43.4 AV                 | 54.0           | -10.6       | 1.38 H             | 268                  | 47.1             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12890.00       | 47.9 PK                 | 88.2           | -40.3       | 2.04 V             | 218                  | 34.5             | 13.4                     |
| 2                                                    | #12890.00       | 39.0 AV                 | 68.2           | -29.2       | 2.04 V             | 218                  | 25.6             | 13.4                     |
| 3                                                    | 19335.00        | 54.6 PK                 | 74.0           | -19.4       | 1.69 V             | 66                   | 58.3             | -3.7                     |
| 4                                                    | 19335.00        | 40.8 AV                 | 54.0           | -13.2       | 1.69 V             | 66                   | 44.5             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 107 : 6485 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12970.00       | 49.4 PK                 | 88.2           | -38.8       | 2.81 H             | 74                   | 36.1             | 13.3                     |
| 2                                                    | #12970.00       | 38.5 AV                 | 68.2           | -29.7       | 2.81 H             | 74                   | 25.2             | 13.3                     |
| 3                                                    | 19455.00        | 54.0 PK                 | 74.0           | -20.0       | 1.46 H             | 278                  | 57.4             | -3.4                     |
| 4                                                    | 19455.00        | 43.4 AV                 | 54.0           | -10.6       | 1.46 H             | 278                  | 46.8             | -3.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12970.00       | 46.9 PK                 | 88.2           | -41.3       | 2.03 V             | 192                  | 33.6             | 13.3                     |
| 2                                                    | #12970.00       | 38.2 AV                 | 68.2           | -30.0       | 2.03 V             | 192                  | 24.9             | 13.3                     |
| 3                                                    | 19455.00        | 54.4 PK                 | 74.0           | -19.6       | 1.75 V             | 59                   | 57.8             | -3.4                     |
| 4                                                    | 19455.00        | 40.8 AV                 | 54.0           | -13.2       | 1.75 V             | 59                   | 44.2             | -3.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 115 : 6525 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13050.00       | 49.9 PK                 | 88.2           | -38.3       | 2.84 H             | 70                   | 36.6             | 13.3                     |
| 2                                                    | #13050.00       | 39.0 AV                 | 68.2           | -29.2       | 2.84 H             | 70                   | 25.7             | 13.3                     |
| 3                                                    | 19575.00        | 54.7 PK                 | 74.0           | -19.3       | 1.47 H             | 279                  | 58.5             | -3.8                     |
| 4                                                    | 19575.00        | 44.1 AV                 | 54.0           | -9.9        | 1.47 H             | 279                  | 47.9             | -3.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13050.00       | 47.1 PK                 | 88.2           | -41.1       | 1.98 V             | 189                  | 33.8             | 13.3                     |
| 2                                                    | #13050.00       | 38.0 AV                 | 68.2           | -30.2       | 1.98 V             | 189                  | 24.7             | 13.3                     |
| 3                                                    | 19575.00        | 54.5 PK                 | 74.0           | -19.5       | 1.66 V             | 53                   | 58.3             | -3.8                     |
| 4                                                    | 19575.00        | 40.9 AV                 | 54.0           | -13.1       | 1.66 V             | 53                   | 44.7             | -3.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 123 : 6565 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13130.00       | 50.3 PK                 | 88.2           | -37.9       | 2.87 H             | 68                   | 36.9             | 13.4                     |
| 2                                                    | #13130.00       | 39.0 AV                 | 68.2           | -29.2       | 2.87 H             | 68                   | 25.6             | 13.4                     |
| 3                                                    | 19695.00        | 54.2 PK                 | 74.0           | -19.8       | 1.46 H             | 269                  | 58.2             | -4.0                     |
| 4                                                    | 19695.00        | 43.8 AV                 | 54.0           | -10.2       | 1.46 H             | 269                  | 47.8             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13130.00       | 47.1 PK                 | 88.2           | -41.1       | 1.97 V             | 214                  | 33.7             | 13.4                     |
| 2                                                    | #13130.00       | 38.0 AV                 | 68.2           | -30.2       | 1.97 V             | 214                  | 24.6             | 13.4                     |
| 3                                                    | 19695.00        | 55.1 PK                 | 74.0           | -18.9       | 1.71 V             | 65                   | 59.1             | -4.0                     |
| 4                                                    | 19695.00        | 41.6 AV                 | 54.0           | -12.4       | 1.71 V             | 65                   | 45.6             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 155 : 6725 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13450.00       | 50.2 PK                 | 88.2           | -38.0       | 2.88 H             | 67                   | 35.8             | 14.4                     |
| 2                                                    | #13450.00       | 39.0 AV                 | 68.2           | -29.2       | 2.88 H             | 67                   | 24.6             | 14.4                     |
| 3                                                    | 20175.00        | 54.4 PK                 | 74.0           | -19.6       | 1.43 H             | 269                  | 57.6             | -3.2                     |
| 4                                                    | 20175.00        | 44.2 AV                 | 54.0           | -9.8        | 1.43 H             | 269                  | 47.4             | -3.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13450.00       | 47.2 PK                 | 88.2           | -41.0       | 2.06 V             | 188                  | 32.8             | 14.4                     |
| 2                                                    | #13450.00       | 38.4 AV                 | 68.2           | -29.8       | 2.06 V             | 188                  | 24.0             | 14.4                     |
| 3                                                    | 20175.00        | 55.4 PK                 | 74.0           | -18.6       | 1.65 V             | 45                   | 58.6             | -3.2                     |
| 4                                                    | 20175.00        | 41.6 AV                 | 54.0           | -12.4       | 1.65 V             | 45                   | 44.8             | -3.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 179 : 6845 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13690.00       | 49.3 PK                 | 88.2           | -38.9       | 2.85 H             | 81                   | 34.0             | 15.3                     |
| 2                                                    | #13690.00       | 38.5 AV                 | 68.2           | -29.7       | 2.85 H             | 81                   | 23.2             | 15.3                     |
| 3                                                    | 20535.00        | 54.4 PK                 | 74.0           | -19.6       | 1.50 H             | 260                  | 57.6             | -3.2                     |
| 4                                                    | 20535.00        | 44.0 AV                 | 54.0           | -10.0       | 1.50 H             | 260                  | 47.2             | -3.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13690.00       | 47.8 PK                 | 88.2           | -40.4       | 2.05 V             | 199                  | 32.5             | 15.3                     |
| 2                                                    | #13690.00       | 38.9 AV                 | 68.2           | -29.3       | 2.05 V             | 199                  | 23.6             | 15.3                     |
| 3                                                    | 20535.00        | 55.1 PK                 | 74.0           | -18.9       | 1.71 V             | 70                   | 58.3             | -3.2                     |
| 4                                                    | 20535.00        | 41.5 AV                 | 54.0           | -12.5       | 1.71 V             | 70                   | 44.7             | -3.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 187 : 6885 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13770.00       | 49.8 PK                 | 88.2           | -38.4       | 2.86 H             | 69                   | 34.7             | 15.1                     |
| 2                                                    | #13770.00       | 38.5 AV                 | 68.2           | -29.7       | 2.86 H             | 69                   | 23.4             | 15.1                     |
| 3                                                    | 20655.00        | 54.2 PK                 | 74.0           | -19.8       | 1.49 H             | 253                  | 57.4             | -3.2                     |
| 4                                                    | 20655.00        | 43.9 AV                 | 54.0           | -10.1       | 1.49 H             | 253                  | 47.1             | -3.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13770.00       | 47.9 PK                 | 88.2           | -40.3       | 1.98 V             | 198                  | 32.8             | 15.1                     |
| 2                                                    | #13770.00       | 38.8 AV                 | 68.2           | -29.4       | 1.98 V             | 198                  | 23.7             | 15.1                     |
| 3                                                    | 20655.00        | 54.5 PK                 | 74.0           | -19.5       | 1.65 V             | 58                   | 57.7             | -3.2                     |
| 4                                                    | 20655.00        | 40.7 AV                 | 54.0           | -13.3       | 1.65 V             | 58                   | 43.9             | -3.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 211 : 7005 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14010.00       | 50.2 PK                 | 88.2           | -38.0       | 2.88 H             | 90                   | 34.7             | 15.5                     |
| 2                                                    | #14010.00       | 39.0 AV                 | 68.2           | -29.2       | 2.88 H             | 90                   | 23.5             | 15.5                     |
| 3                                                    | 21015.00        | 54.7 PK                 | 74.0           | -19.3       | 1.48 H             | 255                  | 57.4             | -2.7                     |
| 4                                                    | 21015.00        | 44.4 AV                 | 54.0           | -9.6        | 1.48 H             | 255                  | 47.1             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14010.00       | 48.0 PK                 | 88.2           | -40.2       | 2.03 V             | 206                  | 32.5             | 15.5                     |
| 2                                                    | #14010.00       | 38.9 AV                 | 68.2           | -29.3       | 2.03 V             | 206                  | 23.4             | 15.5                     |
| 3                                                    | 21015.00        | 54.7 PK                 | 74.0           | -19.3       | 1.64 V             | 59                   | 57.4             | -2.7                     |
| 4                                                    | 21015.00        | 41.2 AV                 | 54.0           | -12.8       | 1.64 V             | 59                   | 43.9             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 227 : 7085 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14170.00       | 50.0 PK                 | 88.2           | -38.2       | 2.91 H             | 83                   | 34.8             | 15.2                     |
| 2                                                    | #14170.00       | 39.0 AV                 | 68.2           | -29.2       | 2.91 H             | 83                   | 23.8             | 15.2                     |
| 3                                                    | 21255.00        | 54.1 PK                 | 74.0           | -19.9       | 1.38 H             | 269                  | 56.5             | -2.4                     |
| 4                                                    | 21255.00        | 43.8 AV                 | 54.0           | -10.2       | 1.38 H             | 269                  | 46.2             | -2.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14170.00       | 47.0 PK                 | 88.2           | -41.2       | 1.95 V             | 188                  | 31.8             | 15.2                     |
| 2                                                    | #14170.00       | 38.0 AV                 | 68.2           | -30.2       | 1.95 V             | 188                  | 22.8             | 15.2                     |
| 3                                                    | 21255.00        | 54.6 PK                 | 74.0           | -19.4       | 1.66 V             | 72                   | 57.0             | -2.4                     |
| 4                                                    | 21255.00        | 41.2 AV                 | 54.0           | -12.8       | 1.66 V             | 72                   | 43.6             | -2.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 7 : 5985 MHz                                                       |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 49.7 PK                 | 74.0           | -24.3       | 2.88 H             | 87                   | 37.5             | 12.2                     |
| 2                                                    | 11970.00        | 38.7 AV                 | 54.0           | -15.3       | 2.88 H             | 87                   | 26.5             | 12.2                     |
| 3                                                    | 17955.00        | 54.8 PK                 | 74.0           | -19.2       | 1.48 H             | 271                  | 31.6             | 23.2                     |
| 4                                                    | 17955.00        | 44.2 AV                 | 54.0           | -9.8        | 1.48 H             | 271                  | 21.0             | 23.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 47.9 PK                 | 74.0           | -26.1       | 1.96 V             | 202                  | 35.7             | 12.2                     |
| 2                                                    | 11970.00        | 38.7 AV                 | 54.0           | -15.3       | 1.96 V             | 202                  | 26.5             | 12.2                     |
| 3                                                    | 17955.00        | 55.2 PK                 | 74.0           | -18.8       | 1.65 V             | 57                   | 32.0             | 23.2                     |
| 4                                                    | 17955.00        | 41.5 AV                 | 54.0           | -12.5       | 1.65 V             | 57                   | 18.3             | 23.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 39 : 6145 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12290.00        | 49.7 PK                 | 74.0           | -24.3       | 2.82 H             | 89                   | 37.2             | 12.5                     |
| 2                                                    | 12290.00        | 38.7 AV                 | 54.0           | -15.3       | 2.82 H             | 89                   | 26.2             | 12.5                     |
| 3                                                    | 18435.00        | 54.0 PK                 | 74.0           | -20.0       | 1.44 H             | 259                  | 58.9             | -4.9                     |
| 4                                                    | 18435.00        | 43.6 AV                 | 54.0           | -10.4       | 1.44 H             | 259                  | 48.5             | -4.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12290.00        | 47.5 PK                 | 74.0           | -26.5       | 2.00 V             | 193                  | 35.0             | 12.5                     |
| 2                                                    | 12290.00        | 38.5 AV                 | 54.0           | -15.5       | 2.00 V             | 193                  | 26.0             | 12.5                     |
| 3                                                    | 18435.00        | 54.7 PK                 | 74.0           | -19.3       | 1.72 V             | 63                   | 59.6             | -4.9                     |
| 4                                                    | 18435.00        | 41.0 AV                 | 54.0           | -13.0       | 1.72 V             | 63                   | 45.9             | -4.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 87 : 6385 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12770.00       | 49.1 PK                 | 88.2           | -39.1       | 2.84 H             | 88                   | 36.0             | 13.1                     |
| 2                                                    | #12770.00       | 38.2 AV                 | 68.2           | -30.0       | 2.84 H             | 88                   | 25.1             | 13.1                     |
| 3                                                    | 19155.00        | 54.4 PK                 | 74.0           | -19.6       | 1.41 H             | 261                  | 58.6             | -4.2                     |
| 4                                                    | 19155.00        | 44.3 AV                 | 54.0           | -9.7        | 1.41 H             | 261                  | 48.5             | -4.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12770.00       | 47.2 PK                 | 88.2           | -41.0       | 2.01 V             | 194                  | 34.1             | 13.1                     |
| 2                                                    | #12770.00       | 38.4 AV                 | 68.2           | -29.8       | 2.01 V             | 194                  | 25.3             | 13.1                     |
| 3                                                    | 19155.00        | 54.2 PK                 | 74.0           | -19.8       | 1.67 V             | 48                   | 58.4             | -4.2                     |
| 4                                                    | 19155.00        | 40.8 AV                 | 54.0           | -13.2       | 1.67 V             | 48                   | 45.0             | -4.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 103 : 6465 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12930.00       | 49.3 PK                 | 88.2           | -38.9       | 2.87 H             | 67                   | 35.9             | 13.4                     |
| 2                                                    | #12930.00       | 38.2 AV                 | 68.2           | -30.0       | 2.87 H             | 67                   | 24.8             | 13.4                     |
| 3                                                    | 19395.00        | 54.7 PK                 | 74.0           | -19.3       | 1.50 H             | 260                  | 58.2             | -3.5                     |
| 4                                                    | 19395.00        | 44.2 AV                 | 54.0           | -9.8        | 1.50 H             | 260                  | 47.7             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12930.00       | 47.4 PK                 | 88.2           | -40.8       | 1.97 V             | 202                  | 34.0             | 13.4                     |
| 2                                                    | #12930.00       | 38.1 AV                 | 68.2           | -30.1       | 1.97 V             | 202                  | 24.7             | 13.4                     |
| 3                                                    | 19395.00        | 55.0 PK                 | 74.0           | -19.0       | 1.74 V             | 73                   | 58.5             | -3.5                     |
| 4                                                    | 19395.00        | 41.4 AV                 | 54.0           | -12.6       | 1.74 V             | 73                   | 44.9             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 119 : 6545 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13090.00       | 50.1 PK                 | 88.2           | -38.1       | 2.87 H             | 62                   | 36.6             | 13.5                     |
| 2                                                    | #13090.00       | 38.9 AV                 | 68.2           | -29.3       | 2.87 H             | 62                   | 25.4             | 13.5                     |
| 3                                                    | 19635.00        | 54.1 PK                 | 74.0           | -19.9       | 1.48 H             | 260                  | 58.1             | -4.0                     |
| 4                                                    | 19635.00        | 43.6 AV                 | 54.0           | -10.4       | 1.48 H             | 260                  | 47.6             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13090.00       | 47.2 PK                 | 88.2           | -41.0       | 2.05 V             | 197                  | 33.7             | 13.5                     |
| 2                                                    | #13090.00       | 38.4 AV                 | 68.2           | -29.8       | 2.05 V             | 197                  | 24.9             | 13.5                     |
| 3                                                    | 19635.00        | 54.9 PK                 | 74.0           | -19.1       | 1.65 V             | 47                   | 58.9             | -4.0                     |
| 4                                                    | 19635.00        | 41.2 AV                 | 54.0           | -12.8       | 1.65 V             | 47                   | 45.2             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 151 : 6705 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13410.00       | 49.7 PK                 | 88.2           | -38.5       | 2.88 H             | 74                   | 35.5             | 14.2                     |
| 2                                                    | #13410.00       | 38.8 AV                 | 68.2           | -29.4       | 2.88 H             | 74                   | 24.6             | 14.2                     |
| 3                                                    | 20115.00        | 54.5 PK                 | 74.0           | -19.5       | 1.50 H             | 261                  | 57.7             | -3.2                     |
| 4                                                    | 20115.00        | 44.0 AV                 | 54.0           | -10.0       | 1.50 H             | 261                  | 47.2             | -3.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13410.00       | 48.1 PK                 | 88.2           | -40.1       | 2.00 V             | 215                  | 33.9             | 14.2                     |
| 2                                                    | #13410.00       | 38.8 AV                 | 68.2           | -29.4       | 2.00 V             | 215                  | 24.6             | 14.2                     |
| 3                                                    | 20115.00        | 54.7 PK                 | 74.0           | -19.3       | 1.74 V             | 53                   | 57.9             | -3.2                     |
| 4                                                    | 20115.00        | 41.0 AV                 | 54.0           | -13.0       | 1.74 V             | 53                   | 44.2             | -3.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 183 : 6865 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13730.00       | 49.8 PK                 | 88.2           | -38.4       | 2.87 H             | 90                   | 34.7             | 15.1                     |
| 2                                                    | #13730.00       | 38.6 AV                 | 68.2           | -29.6       | 2.87 H             | 90                   | 23.5             | 15.1                     |
| 3                                                    | 20595.00        | 54.2 PK                 | 74.0           | -19.8       | 1.45 H             | 277                  | 57.6             | -3.4                     |
| 4                                                    | 20595.00        | 43.9 AV                 | 54.0           | -10.1       | 1.45 H             | 277                  | 47.3             | -3.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13730.00       | 47.3 PK                 | 88.2           | -40.9       | 1.99 V             | 200                  | 32.2             | 15.1                     |
| 2                                                    | #13730.00       | 38.5 AV                 | 68.2           | -29.7       | 1.99 V             | 200                  | 23.4             | 15.1                     |
| 3                                                    | 20595.00        | 54.5 PK                 | 74.0           | -19.5       | 1.74 V             | 74                   | 57.9             | -3.4                     |
| 4                                                    | 20595.00        | 40.8 AV                 | 54.0           | -13.2       | 1.74 V             | 74                   | 44.2             | -3.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 199 : 6945 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13890.00       | 49.2 PK                 | 88.2           | -39.0       | 2.83 H             | 63                   | 34.3             | 14.9                     |
| 2                                                    | #13890.00       | 38.3 AV                 | 68.2           | -29.9       | 2.83 H             | 63                   | 23.4             | 14.9                     |
| 3                                                    | 20835.00        | 54.1 PK                 | 74.0           | -19.9       | 1.42 H             | 265                  | 56.8             | -2.7                     |
| 4                                                    | 20835.00        | 43.5 AV                 | 54.0           | -10.5       | 1.42 H             | 265                  | 46.2             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13890.00       | 47.3 PK                 | 88.2           | -40.9       | 2.02 V             | 217                  | 32.4             | 14.9                     |
| 2                                                    | #13890.00       | 38.5 AV                 | 68.2           | -29.7       | 2.02 V             | 217                  | 23.6             | 14.9                     |
| 3                                                    | 20835.00        | 54.5 PK                 | 74.0           | -19.5       | 1.67 V             | 46                   | 57.2             | -2.7                     |
| 4                                                    | 20835.00        | 41.1 AV                 | 54.0           | -12.9       | 1.67 V             | 46                   | 43.8             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 215 : 7025 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14050.00       | 49.6 PK                 | 88.2           | -38.6       | 2.84 H             | 86                   | 34.2             | 15.4                     |
| 2                                                    | #14050.00       | 38.9 AV                 | 68.2           | -29.3       | 2.84 H             | 86                   | 23.5             | 15.4                     |
| 3                                                    | 21075.00        | 54.0 PK                 | 74.0           | -20.0       | 1.45 H             | 259                  | 56.7             | -2.7                     |
| 4                                                    | 21075.00        | 43.6 AV                 | 54.0           | -10.4       | 1.45 H             | 259                  | 46.3             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14050.00       | 47.4 PK                 | 88.2           | -40.8       | 1.96 V             | 205                  | 32.0             | 15.4                     |
| 2                                                    | #14050.00       | 38.7 AV                 | 68.2           | -29.5       | 1.96 V             | 205                  | 23.3             | 15.4                     |
| 3                                                    | 21075.00        | 54.7 PK                 | 74.0           | -19.3       | 1.70 V             | 75                   | 57.4             | -2.7                     |
| 4                                                    | 21075.00        | 40.9 AV                 | 54.0           | -13.1       | 1.70 V             | 75                   | 43.6             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                   |                                          |                                                                       |
|-----------------------------|-------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 15 : 6025 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 50.1 PK                 | 74.0           | -23.9       | 2.83 H             | 71                   | 37.6             | 12.5                     |
| 2                                                    | 12050.00        | 39.1 AV                 | 54.0           | -14.9       | 2.83 H             | 71                   | 26.6             | 12.5                     |
| 3                                                    | 18075.00        | 54.4 PK                 | 74.0           | -19.6       | 1.49 H             | 255                  | 58.9             | -4.5                     |
| 4                                                    | 18075.00        | 44.1 AV                 | 54.0           | -9.9        | 1.49 H             | 255                  | 48.6             | -4.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 47.3 PK                 | 74.0           | -26.7       | 1.96 V             | 218                  | 34.8             | 12.5                     |
| 2                                                    | 12050.00        | 38.2 AV                 | 54.0           | -15.8       | 1.96 V             | 218                  | 25.7             | 12.5                     |
| 3                                                    | 18075.00        | 54.7 PK                 | 74.0           | -19.3       | 1.65 V             | 62                   | 59.2             | -4.5                     |
| 4                                                    | 18075.00        | 41.1 AV                 | 54.0           | -12.9       | 1.65 V             | 62                   | 45.6             | -4.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                       |
|-----------------------------|-------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 47 : 6185 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12370.00        | 50.2 PK                 | 74.0           | -23.8       | 2.84 H             | 81                   | 37.8             | 12.4                     |
| 2                                                    | 12370.00        | 39.1 AV                 | 54.0           | -14.9       | 2.84 H             | 81                   | 26.7             | 12.4                     |
| 3                                                    | 18555.00        | 54.4 PK                 | 74.0           | -19.6       | 1.40 H             | 270                  | 58.9             | -4.5                     |
| 4                                                    | 18555.00        | 43.9 AV                 | 54.0           | -10.1       | 1.40 H             | 270                  | 48.4             | -4.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12370.00        | 47.3 PK                 | 74.0           | -26.7       | 1.99 V             | 194                  | 34.9             | 12.4                     |
| 2                                                    | 12370.00        | 38.3 AV                 | 54.0           | -15.7       | 1.99 V             | 194                  | 25.9             | 12.4                     |
| 3                                                    | 18555.00        | 55.5 PK                 | 74.0           | -18.5       | 1.66 V             | 69                   | 60.0             | -4.5                     |
| 4                                                    | 18555.00        | 41.6 AV                 | 54.0           | -12.4       | 1.66 V             | 69                   | 46.1             | -4.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                       |
|-----------------------------|-------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 79 : 6345 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 49.5 PK                 | 74.0           | -24.5       | 2.89 H             | 68                   | 36.5             | 13.0                     |
| 2                                                    | 12690.00        | 38.8 AV                 | 54.0           | -15.2       | 2.89 H             | 68                   | 25.8             | 13.0                     |
| 3                                                    | 19035.00        | 54.3 PK                 | 74.0           | -19.7       | 1.44 H             | 253                  | 58.4             | -4.1                     |
| 4                                                    | 19035.00        | 43.7 AV                 | 54.0           | -10.3       | 1.44 H             | 253                  | 47.8             | -4.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 48.1 PK                 | 74.0           | -25.9       | 2.06 V             | 193                  | 35.1             | 13.0                     |
| 2                                                    | 12690.00        | 38.9 AV                 | 54.0           | -15.1       | 2.06 V             | 193                  | 25.9             | 13.0                     |
| 3                                                    | 19035.00        | 55.0 PK                 | 74.0           | -19.0       | 1.68 V             | 48                   | 59.1             | -4.1                     |
| 4                                                    | 19035.00        | 41.4 AV                 | 54.0           | -12.6       | 1.68 V             | 48                   | 45.5             | -4.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                       |
|-----------------------------|-------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 111 : 6505 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13010.00       | 49.3 PK                 | 88.2           | -38.9       | 2.82 H             | 75                   | 36.1             | 13.2                     |
| 2                                                    | #13010.00       | 38.6 AV                 | 68.2           | -29.6       | 2.82 H             | 75                   | 25.4             | 13.2                     |
| 3                                                    | 19515.00        | 54.5 PK                 | 74.0           | -19.5       | 1.38 H             | 279                  | 58.0             | -3.5                     |
| 4                                                    | 19515.00        | 44.4 AV                 | 54.0           | -9.6        | 1.38 H             | 279                  | 47.9             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13010.00       | 47.8 PK                 | 88.2           | -40.4       | 2.01 V             | 196                  | 34.6             | 13.2                     |
| 2                                                    | #13010.00       | 39.0 AV                 | 68.2           | -29.2       | 2.01 V             | 196                  | 25.8             | 13.2                     |
| 3                                                    | 19515.00        | 54.7 PK                 | 74.0           | -19.3       | 1.66 V             | 53                   | 58.2             | -3.5                     |
| 4                                                    | 19515.00        | 41.2 AV                 | 54.0           | -12.8       | 1.66 V             | 53                   | 44.7             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                   |                                          |                                                                       |
|-----------------------------|-------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 143 : 6665 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 50.3 PK                 | 74.0           | -23.7       | 2.87 H             | 89                   | 36.5             | 13.8                     |
| 2                                                    | 13330.00        | 39.1 AV                 | 54.0           | -14.9       | 2.87 H             | 89                   | 25.3             | 13.8                     |
| 3                                                    | 19995.00        | 54.4 PK                 | 74.0           | -19.6       | 1.42 H             | 266                  | 58.2             | -3.8                     |
| 4                                                    | 19995.00        | 43.8 AV                 | 54.0           | -10.2       | 1.42 H             | 266                  | 47.6             | -3.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 47.2 PK                 | 74.0           | -26.8       | 1.97 V             | 190                  | 33.4             | 13.8                     |
| 2                                                    | 13330.00        | 38.1 AV                 | 54.0           | -15.9       | 1.97 V             | 190                  | 24.3             | 13.8                     |
| 3                                                    | 19995.00        | 54.1 PK                 | 74.0           | -19.9       | 1.67 V             | 56                   | 57.9             | -3.8                     |
| 4                                                    | 19995.00        | 40.8 AV                 | 54.0           | -13.2       | 1.67 V             | 56                   | 44.6             | -3.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                       |
|-----------------------------|-------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 175 : 6825 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13650.00       | 49.4 PK                 | 88.2           | -38.8       | 2.81 H             | 64                   | 34.3             | 15.1                     |
| 2                                                    | #13650.00       | 38.3 AV                 | 68.2           | -29.9       | 2.81 H             | 64                   | 23.2             | 15.1                     |
| 3                                                    | 20475.00        | 54.2 PK                 | 74.0           | -19.8       | 1.48 H             | 250                  | 57.1             | -2.9                     |
| 4                                                    | 20475.00        | 43.5 AV                 | 54.0           | -10.5       | 1.48 H             | 250                  | 46.4             | -2.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13650.00       | 47.4 PK                 | 88.2           | -40.8       | 2.04 V             | 191                  | 32.3             | 15.1                     |
| 2                                                    | #13650.00       | 38.2 AV                 | 68.2           | -30.0       | 2.04 V             | 191                  | 23.1             | 15.1                     |
| 3                                                    | 20475.00        | 54.2 PK                 | 74.0           | -19.8       | 1.69 V             | 49                   | 57.1             | -2.9                     |
| 4                                                    | 20475.00        | 40.9 AV                 | 54.0           | -13.1       | 1.69 V             | 49                   | 43.8             | -2.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                   |                                          |                                                                       |
|-----------------------------|-------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 207 : 6985 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13970.00       | 50.1 PK                 | 88.2           | -38.1       | 2.82 H             | 73                   | 34.8             | 15.3                     |
| 2                                                    | #13970.00       | 38.9 AV                 | 68.2           | -29.3       | 2.82 H             | 73                   | 23.6             | 15.3                     |
| 3                                                    | 20955.00        | 54.2 PK                 | 74.0           | -19.8       | 1.40 H             | 266                  | 56.8             | -2.6                     |
| 4                                                    | 20955.00        | 44.0 AV                 | 54.0           | -10.0       | 1.40 H             | 266                  | 46.6             | -2.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13970.00       | 48.1 PK                 | 88.2           | -40.1       | 2.04 V             | 192                  | 32.8             | 15.3                     |
| 2                                                    | #13970.00       | 39.0 AV                 | 68.2           | -29.2       | 2.04 V             | 192                  | 23.7             | 15.3                     |
| 3                                                    | 20955.00        | 54.5 PK                 | 74.0           | -19.5       | 1.69 V             | 66                   | 57.1             | -2.6                     |
| 4                                                    | 20955.00        | 40.9 AV                 | 54.0           | -13.1       | 1.69 V             | 66                   | 43.5             | -2.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.9 PK                 | 74.0           | -26.1       | 3.11 H             | 80                   | 35.7             | 12.2                     |
| 2                                                    | 11910.00        | 37.4 AV                 | 54.0           | -16.6       | 3.11 H             | 80                   | 25.2             | 12.2                     |
| 3                                                    | 17865.00        | 52.0 PK                 | 74.0           | -22.0       | 1.61 H             | 222                  | 30.2             | 21.8                     |
| 4                                                    | 17865.00        | 41.2 AV                 | 54.0           | -12.8       | 1.61 H             | 222                  | 19.4             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 49.3 PK                 | 74.0           | -24.7       | 2.09 V             | 227                  | 37.1             | 12.2                     |
| 2                                                    | 11910.00        | 37.6 AV                 | 54.0           | -16.4       | 2.09 V             | 227                  | 25.4             | 12.2                     |
| 3                                                    | 17865.00        | 51.8 PK                 | 74.0           | -22.2       | 1.86 V             | 74                   | 30.0             | 21.8                     |
| 4                                                    | 17865.00        | 41.9 AV                 | 54.0           | -12.1       | 1.86 V             | 74                   | 20.1             | 21.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.9 PK                 | 88.2           | -40.3       | 3.13 H             | 86                   | 34.8             | 13.1                     |
| 2                                                    | #12830.00       | 37.5 AV                 | 68.2           | -30.7       | 3.13 H             | 86                   | 24.4             | 13.1                     |
| 3                                                    | 19245.00        | 52.0 PK                 | 74.0           | -22.0       | 1.65 H             | 205                  | 56.0             | -4.0                     |
| 4                                                    | 19245.00        | 41.1 AV                 | 54.0           | -12.9       | 1.65 H             | 205                  | 45.1             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 49.3 PK                 | 88.2           | -38.9       | 2.04 V             | 236                  | 36.2             | 13.1                     |
| 2                                                    | #12830.00       | 37.7 AV                 | 68.2           | -30.5       | 2.04 V             | 236                  | 24.6             | 13.1                     |
| 3                                                    | 19245.00        | 52.0 PK                 | 74.0           | -22.0       | 1.87 V             | 79                   | 56.0             | -4.0                     |
| 4                                                    | 19245.00        | 41.9 AV                 | 54.0           | -12.1       | 1.87 V             | 79                   | 45.9             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 97 : 6435 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 47.9 PK                 | 88.2           | -40.3       | 3.16 H             | 92                   | 34.6             | 13.3                     |
| 2                                                    | #12870.00       | 37.3 AV                 | 68.2           | -30.9       | 3.16 H             | 92                   | 24.0             | 13.3                     |
| 3                                                    | 19305.00        | 51.5 PK                 | 74.0           | -22.5       | 1.68 H             | 223                  | 55.4             | -3.9                     |
| 4                                                    | 19305.00        | 40.5 AV                 | 54.0           | -13.5       | 1.68 H             | 223                  | 44.4             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 49.1 PK                 | 88.2           | -39.1       | 2.04 V             | 214                  | 35.8             | 13.3                     |
| 2                                                    | #12870.00       | 37.8 AV                 | 68.2           | -30.4       | 2.04 V             | 214                  | 24.5             | 13.3                     |
| 3                                                    | 19305.00        | 52.1 PK                 | 74.0           | -21.9       | 1.90 V             | 66                   | 56.0             | -3.9                     |
| 4                                                    | 19305.00        | 42.0 AV                 | 54.0           | -12.0       | 1.90 V             | 66                   | 45.9             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 113 : 6515 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 47.3 PK                 | 88.2           | -40.9       | 3.13 H             | 75                   | 34.0             | 13.3                     |
| 2                                                    | #13030.00       | 37.0 AV                 | 68.2           | -31.2       | 3.13 H             | 75                   | 23.7             | 13.3                     |
| 3                                                    | 19545.00        | 51.5 PK                 | 74.0           | -22.5       | 1.68 H             | 219                  | 55.2             | -3.7                     |
| 4                                                    | 19545.00        | 40.6 AV                 | 54.0           | -13.4       | 1.68 H             | 219                  | 44.3             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 49.0 PK                 | 88.2           | -39.2       | 2.13 V             | 231                  | 35.7             | 13.3                     |
| 2                                                    | #13030.00       | 37.5 AV                 | 68.2           | -30.7       | 2.13 V             | 231                  | 24.2             | 13.3                     |
| 3                                                    | 19545.00        | 51.1 PK                 | 74.0           | -22.9       | 1.91 V             | 76                   | 54.8             | -3.7                     |
| 4                                                    | 19545.00        | 41.3 AV                 | 54.0           | -12.7       | 1.91 V             | 76                   | 45.0             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.9 PK                 | 88.2           | -40.3       | 3.18 H             | 71                   | 34.6             | 13.3                     |
| 2                                                    | #13070.00       | 37.6 AV                 | 68.2           | -30.6       | 3.18 H             | 71                   | 24.3             | 13.3                     |
| 3                                                    | 19605.00        | 51.6 PK                 | 74.0           | -22.4       | 1.67 H             | 212                  | 55.6             | -4.0                     |
| 4                                                    | 19605.00        | 40.7 AV                 | 54.0           | -13.3       | 1.67 H             | 212                  | 44.7             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 49.4 PK                 | 88.2           | -38.8       | 2.07 V             | 215                  | 36.1             | 13.3                     |
| 2                                                    | #13070.00       | 38.0 AV                 | 68.2           | -30.2       | 2.07 V             | 215                  | 24.7             | 13.3                     |
| 3                                                    | 19605.00        | 51.5 PK                 | 74.0           | -22.5       | 1.83 V             | 84                   | 55.5             | -4.0                     |
| 4                                                    | 19605.00        | 41.9 AV                 | 54.0           | -12.1       | 1.83 V             | 84                   | 45.9             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 185 : 6875 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 48.0 PK                 | 88.2           | -40.2       | 3.20 H             | 78                   | 32.8             | 15.2                     |
| 2                                                    | #13750.00       | 37.6 AV                 | 68.2           | -30.6       | 3.20 H             | 78                   | 22.4             | 15.2                     |
| 3                                                    | 20625.00        | 52.2 PK                 | 74.0           | -21.8       | 1.67 H             | 197                  | 55.5             | -3.3                     |
| 4                                                    | 20625.00        | 41.0 AV                 | 54.0           | -13.0       | 1.67 H             | 197                  | 44.3             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 49.7 PK                 | 88.2           | -38.5       | 2.09 V             | 246                  | 34.5             | 15.2                     |
| 2                                                    | #13750.00       | 38.0 AV                 | 68.2           | -30.2       | 2.09 V             | 246                  | 22.8             | 15.2                     |
| 3                                                    | 20625.00        | 51.7 PK                 | 74.0           | -22.3       | 1.89 V             | 54                   | 55.0             | -3.3                     |
| 4                                                    | 20625.00        | 42.0 AV                 | 54.0           | -12.0       | 1.89 V             | 54                   | 45.3             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 209 : 6995 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 48.1 PK                 | 88.2           | -40.1       | 3.09 H             | 99                   | 32.7             | 15.4                     |
| 2                                                    | #13990.00       | 37.8 AV                 | 68.2           | -30.4       | 3.09 H             | 99                   | 22.4             | 15.4                     |
| 3                                                    | 20985.00        | 52.4 PK                 | 74.0           | -21.6       | 1.63 H             | 212                  | 55.1             | -2.7                     |
| 4                                                    | 20985.00        | 41.2 AV                 | 54.0           | -12.8       | 1.63 H             | 212                  | 43.9             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 49.2 PK                 | 88.2           | -39.0       | 2.05 V             | 233                  | 33.8             | 15.4                     |
| 2                                                    | #13990.00       | 37.8 AV                 | 68.2           | -30.4       | 2.05 V             | 233                  | 22.4             | 15.4                     |
| 3                                                    | 20985.00        | 51.4 PK                 | 74.0           | -22.6       | 1.87 V             | 78                   | 54.1             | -2.7                     |
| 4                                                    | 20985.00        | 41.4 AV                 | 54.0           | -12.6       | 1.87 V             | 78                   | 44.1             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 233 : 7115 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 47.9 PK                 | 88.2           | -40.3       | 3.14 H             | 91                   | 32.6             | 15.3                     |
| 2                                                    | #14230.00       | 37.5 AV                 | 68.2           | -30.7       | 3.14 H             | 91                   | 22.2             | 15.3                     |
| 3                                                    | 21345.00        | 52.1 PK                 | 74.0           | -21.9       | 1.62 H             | 221                  | 54.3             | -2.2                     |
| 4                                                    | 21345.00        | 41.1 AV                 | 54.0           | -12.9       | 1.62 H             | 221                  | 43.3             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 49.3 PK                 | 88.2           | -38.9       | 2.05 V             | 217                  | 34.0             | 15.3                     |
| 2                                                    | #14230.00       | 38.0 AV                 | 68.2           | -30.2       | 2.05 V             | 217                  | 22.7             | 15.3                     |
| 3                                                    | 21345.00        | 51.9 PK                 | 74.0           | -22.1       | 1.86 V             | 57                   | 54.1             | -2.2                     |
| 4                                                    | 21345.00        | 41.9 AV                 | 54.0           | -12.1       | 1.86 V             | 57                   | 44.1             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.8 PK                 | 74.0           | -26.2       | 2.94 H             | 101                  | 35.6             | 12.2                     |
| 2                                                    | 11910.00        | 37.9 AV                 | 54.0           | -16.1       | 2.94 H             | 101                  | 25.7             | 12.2                     |
| 3                                                    | 17865.00        | 52.0 PK                 | 74.0           | -22.0       | 1.61 H             | 175                  | 30.2             | 21.8                     |
| 4                                                    | 17865.00        | 42.2 AV                 | 54.0           | -11.8       | 1.61 H             | 175                  | 20.4             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.2 PK                 | 74.0           | -26.8       | 2.04 V             | 132                  | 35.0             | 12.2                     |
| 2                                                    | 11910.00        | 37.2 AV                 | 54.0           | -16.8       | 2.04 V             | 132                  | 25.0             | 12.2                     |
| 3                                                    | 17865.00        | 52.7 PK                 | 74.0           | -21.3       | 1.51 V             | 52                   | 30.9             | 21.8                     |
| 4                                                    | 17865.00        | 42.2 AV                 | 54.0           | -11.8       | 1.51 V             | 52                   | 20.4             | 21.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.9 PK                 | 88.2           | -40.3       | 2.92 H             | 86                   | 34.8             | 13.1                     |
| 2                                                    | #12830.00       | 37.8 AV                 | 68.2           | -30.4       | 2.92 H             | 86                   | 24.7             | 13.1                     |
| 3                                                    | 19245.00        | 51.8 PK                 | 74.0           | -22.2       | 1.58 H             | 190                  | 55.8             | -4.0                     |
| 4                                                    | 19245.00        | 42.1 AV                 | 54.0           | -11.9       | 1.58 H             | 190                  | 46.1             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.4 PK                 | 88.2           | -40.8       | 1.97 V             | 155                  | 34.3             | 13.1                     |
| 2                                                    | #12830.00       | 37.1 AV                 | 68.2           | -31.1       | 1.97 V             | 155                  | 24.0             | 13.1                     |
| 3                                                    | 19245.00        | 52.1 PK                 | 74.0           | -21.9       | 1.60 V             | 43                   | 56.1             | -4.0                     |
| 4                                                    | 19245.00        | 41.9 AV                 | 54.0           | -12.1       | 1.60 V             | 43                   | 45.9             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 97 : 6435 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 47.2 PK                 | 88.2           | -41.0       | 2.91 H             | 85                   | 33.9             | 13.3                     |
| 2                                                    | #12870.00       | 37.4 AV                 | 68.2           | -30.8       | 2.91 H             | 85                   | 24.1             | 13.3                     |
| 3                                                    | 19305.00        | 52.0 PK                 | 74.0           | -22.0       | 1.63 H             | 175                  | 55.9             | -3.9                     |
| 4                                                    | 19305.00        | 42.5 AV                 | 54.0           | -11.5       | 1.63 H             | 175                  | 46.4             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 46.8 PK                 | 88.2           | -41.4       | 2.02 V             | 143                  | 33.5             | 13.3                     |
| 2                                                    | #12870.00       | 36.9 AV                 | 68.2           | -31.3       | 2.02 V             | 143                  | 23.6             | 13.3                     |
| 3                                                    | 19305.00        | 53.1 PK                 | 74.0           | -20.9       | 1.55 V             | 45                   | 57.0             | -3.9                     |
| 4                                                    | 19305.00        | 42.3 AV                 | 54.0           | -11.7       | 1.55 V             | 45                   | 46.2             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 113 : 6515 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 48.3 PK                 | 88.2           | -39.9       | 2.99 H             | 89                   | 35.0             | 13.3                     |
| 2                                                    | #13030.00       | 38.3 AV                 | 68.2           | -29.9       | 2.99 H             | 89                   | 25.0             | 13.3                     |
| 3                                                    | 19545.00        | 52.6 PK                 | 74.0           | -21.4       | 1.61 H             | 191                  | 56.3             | -3.7                     |
| 4                                                    | 19545.00        | 42.7 AV                 | 54.0           | -11.3       | 1.61 H             | 191                  | 46.4             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 46.9 PK                 | 88.2           | -41.3       | 2.10 V             | 124                  | 33.6             | 13.3                     |
| 2                                                    | #13030.00       | 36.8 AV                 | 68.2           | -31.4       | 2.10 V             | 124                  | 23.5             | 13.3                     |
| 3                                                    | 19545.00        | 53.3 PK                 | 74.0           | -20.7       | 1.56 V             | 56                   | 57.0             | -3.7                     |
| 4                                                    | 19545.00        | 42.7 AV                 | 54.0           | -11.3       | 1.56 V             | 56                   | 46.4             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.2 PK                 | 88.2           | -41.0       | 2.98 H             | 111                  | 33.9             | 13.3                     |
| 2                                                    | #13070.00       | 37.6 AV                 | 68.2           | -30.6       | 2.98 H             | 111                  | 24.3             | 13.3                     |
| 3                                                    | 19605.00        | 52.6 PK                 | 74.0           | -21.4       | 1.60 H             | 174                  | 56.6             | -4.0                     |
| 4                                                    | 19605.00        | 42.7 AV                 | 54.0           | -11.3       | 1.60 H             | 174                  | 46.7             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 46.5 PK                 | 88.2           | -41.7       | 2.06 V             | 136                  | 33.2             | 13.3                     |
| 2                                                    | #13070.00       | 36.7 AV                 | 68.2           | -31.5       | 2.06 V             | 136                  | 23.4             | 13.3                     |
| 3                                                    | 19605.00        | 52.4 PK                 | 74.0           | -21.6       | 1.54 V             | 62                   | 56.4             | -4.0                     |
| 4                                                    | 19605.00        | 42.0 AV                 | 54.0           | -12.0       | 1.54 V             | 62                   | 46.0             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 185 : 6875 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 48.0 PK                 | 88.2           | -40.2       | 2.98 H             | 103                  | 32.8             | 15.2                     |
| 2                                                    | #13750.00       | 38.0 AV                 | 68.2           | -30.2       | 2.98 H             | 103                  | 22.8             | 15.2                     |
| 3                                                    | 20625.00        | 52.5 PK                 | 74.0           | -21.5       | 1.59 H             | 188                  | 55.8             | -3.3                     |
| 4                                                    | 20625.00        | 42.6 AV                 | 54.0           | -11.4       | 1.59 H             | 188                  | 45.9             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 46.8 PK                 | 88.2           | -41.4       | 2.03 V             | 125                  | 31.6             | 15.2                     |
| 2                                                    | #13750.00       | 37.0 AV                 | 68.2           | -31.2       | 2.03 V             | 125                  | 21.8             | 15.2                     |
| 3                                                    | 20625.00        | 53.2 PK                 | 74.0           | -20.8       | 1.55 V             | 47                   | 56.5             | -3.3                     |
| 4                                                    | 20625.00        | 42.7 AV                 | 54.0           | -11.3       | 1.55 V             | 47                   | 46.0             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 209 : 6995 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 47.6 PK                 | 88.2           | -40.6       | 2.92 H             | 86                   | 32.2             | 15.4                     |
| 2                                                    | #13990.00       | 37.9 AV                 | 68.2           | -30.3       | 2.92 H             | 86                   | 22.5             | 15.4                     |
| 3                                                    | 20985.00        | 52.1 PK                 | 74.0           | -21.9       | 1.62 H             | 183                  | 54.8             | -2.7                     |
| 4                                                    | 20985.00        | 42.1 AV                 | 54.0           | -11.9       | 1.62 H             | 183                  | 44.8             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 47.2 PK                 | 88.2           | -41.0       | 2.10 V             | 137                  | 31.8             | 15.4                     |
| 2                                                    | #13990.00       | 37.2 AV                 | 68.2           | -31.0       | 2.10 V             | 137                  | 21.8             | 15.4                     |
| 3                                                    | 20985.00        | 52.8 PK                 | 74.0           | -21.2       | 1.47 V             | 60                   | 55.5             | -2.7                     |
| 4                                                    | 20985.00        | 42.4 AV                 | 54.0           | -11.6       | 1.47 V             | 60                   | 45.1             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 233 : 7115 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 47.4 PK                 | 88.2           | -40.8       | 2.91 H             | 90                   | 32.1             | 15.3                     |
| 2                                                    | #14230.00       | 37.8 AV                 | 68.2           | -30.4       | 2.91 H             | 90                   | 22.5             | 15.3                     |
| 3                                                    | 21345.00        | 51.4 PK                 | 74.0           | -22.6       | 1.63 H             | 160                  | 53.6             | -2.2                     |
| 4                                                    | 21345.00        | 41.8 AV                 | 54.0           | -12.2       | 1.63 H             | 160                  | 44.0             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 47.0 PK                 | 88.2           | -41.2       | 2.00 V             | 147                  | 31.7             | 15.3                     |
| 2                                                    | #14230.00       | 36.8 AV                 | 68.2           | -31.4       | 2.00 V             | 147                  | 21.5             | 15.3                     |
| 3                                                    | 21345.00        | 52.6 PK                 | 74.0           | -21.4       | 1.57 V             | 59                   | 54.8             | -2.2                     |
| 4                                                    | 21345.00        | 42.4 AV                 | 54.0           | -11.6       | 1.57 V             | 59                   | 44.6             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.3 PK                 | 74.0           | -26.7       | 2.99 H             | 102                  | 35.1             | 12.2                     |
| 2                                                    | 11910.00        | 37.6 AV                 | 54.0           | -16.4       | 2.99 H             | 102                  | 25.4             | 12.2                     |
| 3                                                    | 17865.00        | 51.6 PK                 | 74.0           | -22.4       | 1.59 H             | 169                  | 29.8             | 21.8                     |
| 4                                                    | 17865.00        | 41.8 AV                 | 54.0           | -12.2       | 1.59 H             | 169                  | 20.0             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 46.7 PK                 | 74.0           | -27.3       | 1.93 V             | 179                  | 34.5             | 12.2                     |
| 2                                                    | 11910.00        | 36.5 AV                 | 54.0           | -17.5       | 1.93 V             | 179                  | 24.3             | 12.2                     |
| 3                                                    | 17865.00        | 52.1 PK                 | 74.0           | -21.9       | 1.63 V             | 48                   | 30.3             | 21.8                     |
| 4                                                    | 17865.00        | 41.8 AV                 | 54.0           | -12.2       | 1.63 V             | 48                   | 20.0             | 21.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.7 PK                 | 88.2           | -40.5       | 2.98 H             | 89                   | 34.6             | 13.1                     |
| 2                                                    | #12830.00       | 37.7 AV                 | 68.2           | -30.5       | 2.98 H             | 89                   | 24.6             | 13.1                     |
| 3                                                    | 19245.00        | 52.3 PK                 | 74.0           | -21.7       | 1.64 H             | 173                  | 56.3             | -4.0                     |
| 4                                                    | 19245.00        | 42.2 AV                 | 54.0           | -11.8       | 1.64 H             | 173                  | 46.2             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 46.5 PK                 | 88.2           | -41.7       | 1.90 V             | 175                  | 33.4             | 13.1                     |
| 2                                                    | #12830.00       | 36.4 AV                 | 68.2           | -31.8       | 1.90 V             | 175                  | 23.3             | 13.1                     |
| 3                                                    | 19245.00        | 52.2 PK                 | 74.0           | -21.8       | 1.64 V             | 47                   | 56.2             | -4.0                     |
| 4                                                    | 19245.00        | 41.9 AV                 | 54.0           | -12.1       | 1.64 V             | 47                   | 45.9             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 97 : 6435 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 48.2 PK                 | 88.2           | -40.0       | 2.90 H             | 107                  | 34.9             | 13.3                     |
| 2                                                    | #12870.00       | 38.2 AV                 | 68.2           | -30.0       | 2.90 H             | 107                  | 24.9             | 13.3                     |
| 3                                                    | 19305.00        | 52.1 PK                 | 74.0           | -21.9       | 1.57 H             | 163                  | 56.0             | -3.9                     |
| 4                                                    | 19305.00        | 42.5 AV                 | 54.0           | -11.5       | 1.57 H             | 163                  | 46.4             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 46.6 PK                 | 88.2           | -41.6       | 1.92 V             | 164                  | 33.3             | 13.3                     |
| 2                                                    | #12870.00       | 36.1 AV                 | 68.2           | -32.1       | 1.92 V             | 164                  | 22.8             | 13.3                     |
| 3                                                    | 19305.00        | 52.7 PK                 | 74.0           | -21.3       | 1.61 V             | 41                   | 56.6             | -3.9                     |
| 4                                                    | 19305.00        | 42.2 AV                 | 54.0           | -11.8       | 1.61 V             | 41                   | 46.1             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 113 : 6515 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 47.4 PK                 | 88.2           | -40.8       | 2.90 H             | 115                  | 34.1             | 13.3                     |
| 2                                                    | #13030.00       | 37.5 AV                 | 68.2           | -30.7       | 2.90 H             | 115                  | 24.2             | 13.3                     |
| 3                                                    | 19545.00        | 52.0 PK                 | 74.0           | -22.0       | 1.56 H             | 190                  | 55.7             | -3.7                     |
| 4                                                    | 19545.00        | 42.0 AV                 | 54.0           | -12.0       | 1.56 H             | 190                  | 45.7             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 46.4 PK                 | 88.2           | -41.8       | 1.99 V             | 178                  | 33.1             | 13.3                     |
| 2                                                    | #13030.00       | 36.0 AV                 | 68.2           | -32.2       | 1.99 V             | 178                  | 22.7             | 13.3                     |
| 3                                                    | 19545.00        | 52.7 PK                 | 74.0           | -21.3       | 1.59 V             | 42                   | 56.4             | -3.7                     |
| 4                                                    | 19545.00        | 42.3 AV                 | 54.0           | -11.7       | 1.59 V             | 42                   | 46.0             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.6 PK                 | 88.2           | -40.6       | 2.92 H             | 91                   | 34.3             | 13.3                     |
| 2                                                    | #13070.00       | 37.9 AV                 | 68.2           | -30.3       | 2.92 H             | 91                   | 24.6             | 13.3                     |
| 3                                                    | 19605.00        | 51.8 PK                 | 74.0           | -22.2       | 1.63 H             | 175                  | 55.8             | -4.0                     |
| 4                                                    | 19605.00        | 42.0 AV                 | 54.0           | -12.0       | 1.63 H             | 175                  | 46.0             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 46.5 PK                 | 88.2           | -41.7       | 1.98 V             | 189                  | 33.2             | 13.3                     |
| 2                                                    | #13070.00       | 36.5 AV                 | 68.2           | -31.7       | 1.98 V             | 189                  | 23.2             | 13.3                     |
| 3                                                    | 19605.00        | 52.2 PK                 | 74.0           | -21.8       | 1.63 V             | 36                   | 56.2             | -4.0                     |
| 4                                                    | 19605.00        | 42.1 AV                 | 54.0           | -11.9       | 1.63 V             | 36                   | 46.1             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 185 : 6875 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 48.4 PK                 | 88.2           | -39.8       | 2.91 H             | 105                  | 33.2             | 15.2                     |
| 2                                                    | #13750.00       | 38.3 AV                 | 68.2           | -29.9       | 2.91 H             | 105                  | 23.1             | 15.2                     |
| 3                                                    | 20625.00        | 52.0 PK                 | 74.0           | -22.0       | 1.64 H             | 186                  | 55.3             | -3.3                     |
| 4                                                    | 20625.00        | 42.1 AV                 | 54.0           | -11.9       | 1.64 H             | 186                  | 45.4             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 46.3 PK                 | 88.2           | -41.9       | 1.90 V             | 168                  | 31.1             | 15.2                     |
| 2                                                    | #13750.00       | 36.3 AV                 | 68.2           | -31.9       | 1.90 V             | 168                  | 21.1             | 15.2                     |
| 3                                                    | 20625.00        | 52.2 PK                 | 74.0           | -21.8       | 1.57 V             | 43                   | 55.5             | -3.3                     |
| 4                                                    | 20625.00        | 41.9 AV                 | 54.0           | -12.1       | 1.57 V             | 43                   | 45.2             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 209 : 6995 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 47.7 PK                 | 88.2           | -40.5       | 2.99 H             | 98                   | 32.3             | 15.4                     |
| 2                                                    | #13990.00       | 38.1 AV                 | 68.2           | -30.1       | 2.99 H             | 98                   | 22.7             | 15.4                     |
| 3                                                    | 20985.00        | 51.6 PK                 | 74.0           | -22.4       | 1.57 H             | 184                  | 54.3             | -2.7                     |
| 4                                                    | 20985.00        | 42.0 AV                 | 54.0           | -12.0       | 1.57 H             | 184                  | 44.7             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 46.1 PK                 | 88.2           | -42.1       | 1.90 V             | 171                  | 30.7             | 15.4                     |
| 2                                                    | #13990.00       | 36.1 AV                 | 68.2           | -32.1       | 1.90 V             | 171                  | 20.7             | 15.4                     |
| 3                                                    | 20985.00        | 52.1 PK                 | 74.0           | -21.9       | 1.65 V             | 47                   | 54.8             | -2.7                     |
| 4                                                    | 20985.00        | 41.5 AV                 | 54.0           | -12.5       | 1.65 V             | 47                   | 44.2             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 233 : 7115 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 48.3 PK                 | 88.2           | -39.9       | 2.93 H             | 115                  | 33.0             | 15.3                     |
| 2                                                    | #14230.00       | 38.1 AV                 | 68.2           | -30.1       | 2.93 H             | 115                  | 22.8             | 15.3                     |
| 3                                                    | 21345.00        | 51.6 PK                 | 74.0           | -22.4       | 1.64 H             | 184                  | 53.8             | -2.2                     |
| 4                                                    | 21345.00        | 41.8 AV                 | 54.0           | -12.2       | 1.64 H             | 184                  | 44.0             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 46.7 PK                 | 88.2           | -41.5       | 1.90 V             | 172                  | 31.4             | 15.3                     |
| 2                                                    | #14230.00       | 36.7 AV                 | 68.2           | -31.5       | 1.90 V             | 172                  | 21.4             | 15.3                     |
| 3                                                    | 21345.00        | 51.8 PK                 | 74.0           | -22.2       | 1.67 V             | 57                   | 54.0             | -2.2                     |
| 4                                                    | 21345.00        | 41.7 AV                 | 54.0           | -12.3       | 1.67 V             | 57                   | 43.9             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.8 PK                 | 74.0           | -26.2       | 2.96 H             | 87                   | 35.6             | 12.2                     |
| 2                                                    | 11910.00        | 37.9 AV                 | 54.0           | -16.1       | 2.96 H             | 87                   | 25.7             | 12.2                     |
| 3                                                    | 17865.00        | 52.2 PK                 | 74.0           | -21.8       | 1.63 H             | 161                  | 30.4             | 21.8                     |
| 4                                                    | 17865.00        | 42.3 AV                 | 54.0           | -11.7       | 1.63 H             | 161                  | 20.5             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.2 PK                 | 74.0           | -26.8       | 1.89 V             | 169                  | 35.0             | 12.2                     |
| 2                                                    | 11910.00        | 36.8 AV                 | 54.0           | -17.2       | 1.89 V             | 169                  | 24.6             | 12.2                     |
| 3                                                    | 17865.00        | 52.0 PK                 | 74.0           | -22.0       | 1.68 V             | 38                   | 30.2             | 21.8                     |
| 4                                                    | 17865.00        | 41.8 AV                 | 54.0           | -12.2       | 1.68 V             | 38                   | 20.0             | 21.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.6 PK                 | 88.2           | -40.6       | 3.00 H             | 116                  | 34.5             | 13.1                     |
| 2                                                    | #12830.00       | 37.9 AV                 | 68.2           | -30.3       | 3.00 H             | 116                  | 24.8             | 13.1                     |
| 3                                                    | 19245.00        | 51.2 PK                 | 74.0           | -22.8       | 1.57 H             | 187                  | 55.2             | -4.0                     |
| 4                                                    | 19245.00        | 41.7 AV                 | 54.0           | -12.3       | 1.57 H             | 187                  | 45.7             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 46.8 PK                 | 88.2           | -41.4       | 1.96 V             | 190                  | 33.7             | 13.1                     |
| 2                                                    | #12830.00       | 36.7 AV                 | 68.2           | -31.5       | 1.96 V             | 190                  | 23.6             | 13.1                     |
| 3                                                    | 19245.00        | 52.2 PK                 | 74.0           | -21.8       | 1.57 V             | 40                   | 56.2             | -4.0                     |
| 4                                                    | 19245.00        | 41.7 AV                 | 54.0           | -12.3       | 1.57 V             | 40                   | 45.7             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 97 : 6435 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 48.4 PK                 | 88.2           | -39.8       | 2.94 H             | 99                   | 35.1             | 13.3                     |
| 2                                                    | #12870.00       | 38.3 AV                 | 68.2           | -29.9       | 2.94 H             | 99                   | 25.0             | 13.3                     |
| 3                                                    | 19305.00        | 51.6 PK                 | 74.0           | -22.4       | 1.56 H             | 171                  | 55.5             | -3.9                     |
| 4                                                    | 19305.00        | 41.8 AV                 | 54.0           | -12.2       | 1.56 H             | 171                  | 45.7             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 47.0 PK                 | 88.2           | -41.2       | 1.93 V             | 193                  | 33.7             | 13.3                     |
| 2                                                    | #12870.00       | 36.8 AV                 | 68.2           | -31.4       | 1.93 V             | 193                  | 23.5             | 13.3                     |
| 3                                                    | 19305.00        | 52.6 PK                 | 74.0           | -21.4       | 1.60 V             | 36                   | 56.5             | -3.9                     |
| 4                                                    | 19305.00        | 42.0 AV                 | 54.0           | -12.0       | 1.60 V             | 36                   | 45.9             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 113 : 6515 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 47.7 PK                 | 88.2           | -40.5       | 2.92 H             | 100                  | 34.4             | 13.3                     |
| 2                                                    | #13030.00       | 37.9 AV                 | 68.2           | -30.3       | 2.92 H             | 100                  | 24.6             | 13.3                     |
| 3                                                    | 19545.00        | 52.5 PK                 | 74.0           | -21.5       | 1.56 H             | 185                  | 56.2             | -3.7                     |
| 4                                                    | 19545.00        | 42.6 AV                 | 54.0           | -11.4       | 1.56 H             | 185                  | 46.3             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 46.9 PK                 | 88.2           | -41.3       | 1.89 V             | 176                  | 33.6             | 13.3                     |
| 2                                                    | #13030.00       | 36.5 AV                 | 68.2           | -31.7       | 1.89 V             | 176                  | 23.2             | 13.3                     |
| 3                                                    | 19545.00        | 52.0 PK                 | 74.0           | -22.0       | 1.63 V             | 50                   | 55.7             | -3.7                     |
| 4                                                    | 19545.00        | 41.5 AV                 | 54.0           | -12.5       | 1.63 V             | 50                   | 45.2             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.7 PK                 | 88.2           | -40.5       | 2.97 H             | 110                  | 34.4             | 13.3                     |
| 2                                                    | #13070.00       | 37.9 AV                 | 68.2           | -30.3       | 2.97 H             | 110                  | 24.6             | 13.3                     |
| 3                                                    | 19605.00        | 52.1 PK                 | 74.0           | -21.9       | 1.60 H             | 180                  | 56.1             | -4.0                     |
| 4                                                    | 19605.00        | 42.5 AV                 | 54.0           | -11.5       | 1.60 H             | 180                  | 46.5             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.0 PK                 | 88.2           | -41.2       | 1.94 V             | 182                  | 33.7             | 13.3                     |
| 2                                                    | #13070.00       | 36.6 AV                 | 68.2           | -31.6       | 1.94 V             | 182                  | 23.3             | 13.3                     |
| 3                                                    | 19605.00        | 52.3 PK                 | 74.0           | -21.7       | 1.68 V             | 37                   | 56.3             | -4.0                     |
| 4                                                    | 19605.00        | 42.0 AV                 | 54.0           | -12.0       | 1.68 V             | 37                   | 46.0             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 185 : 6875 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 47.3 PK                 | 88.2           | -40.9       | 2.94 H             | 104                  | 32.1             | 15.2                     |
| 2                                                    | #13750.00       | 37.6 AV                 | 68.2           | -30.6       | 2.94 H             | 104                  | 22.4             | 15.2                     |
| 3                                                    | 20625.00        | 51.5 PK                 | 74.0           | -22.5       | 1.59 H             | 167                  | 54.8             | -3.3                     |
| 4                                                    | 20625.00        | 41.8 AV                 | 54.0           | -12.2       | 1.59 H             | 167                  | 45.1             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 46.7 PK                 | 88.2           | -41.5       | 1.91 V             | 175                  | 31.5             | 15.2                     |
| 2                                                    | #13750.00       | 36.7 AV                 | 68.2           | -31.5       | 1.91 V             | 175                  | 21.5             | 15.2                     |
| 3                                                    | 20625.00        | 51.7 PK                 | 74.0           | -22.3       | 1.59 V             | 57                   | 55.0             | -3.3                     |
| 4                                                    | 20625.00        | 41.4 AV                 | 54.0           | -12.6       | 1.59 V             | 57                   | 44.7             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 209 : 6995 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 47.9 PK                 | 88.2           | -40.3       | 2.99 H             | 113                  | 32.5             | 15.4                     |
| 2                                                    | #13990.00       | 38.3 AV                 | 68.2           | -29.9       | 2.99 H             | 113                  | 22.9             | 15.4                     |
| 3                                                    | 20985.00        | 52.5 PK                 | 74.0           | -21.5       | 1.57 H             | 177                  | 55.2             | -2.7                     |
| 4                                                    | 20985.00        | 42.6 AV                 | 54.0           | -11.4       | 1.57 H             | 177                  | 45.3             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 46.6 PK                 | 88.2           | -41.6       | 1.91 V             | 190                  | 31.2             | 15.4                     |
| 2                                                    | #13990.00       | 36.4 AV                 | 68.2           | -31.8       | 1.91 V             | 190                  | 21.0             | 15.4                     |
| 3                                                    | 20985.00        | 52.5 PK                 | 74.0           | -21.5       | 1.66 V             | 48                   | 55.2             | -2.7                     |
| 4                                                    | 20985.00        | 42.1 AV                 | 54.0           | -11.9       | 1.66 V             | 48                   | 44.8             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 233 : 7115 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 48.3 PK                 | 88.2           | -39.9       | 2.96 H             | 85                   | 33.0             | 15.3                     |
| 2                                                    | #14230.00       | 38.4 AV                 | 68.2           | -29.8       | 2.96 H             | 85                   | 23.1             | 15.3                     |
| 3                                                    | 21345.00        | 52.5 PK                 | 74.0           | -21.5       | 1.66 H             | 177                  | 54.7             | -2.2                     |
| 4                                                    | 21345.00        | 42.5 AV                 | 54.0           | -11.5       | 1.66 H             | 177                  | 44.7             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 46.6 PK                 | 88.2           | -41.6       | 1.96 V             | 194                  | 31.3             | 15.3                     |
| 2                                                    | #14230.00       | 36.5 AV                 | 68.2           | -31.7       | 1.96 V             | 194                  | 21.2             | 15.3                     |
| 3                                                    | 21345.00        | 51.9 PK                 | 74.0           | -22.1       | 1.67 V             | 42                   | 54.1             | -2.2                     |
| 4                                                    | 21345.00        | 41.7 AV                 | 54.0           | -12.3       | 1.67 V             | 42                   | 43.9             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 48.3 PK                 | 74.0           | -25.7       | 2.89 H             | 85                   | 36.1             | 12.2                     |
| 2                                                    | 11910.00        | 38.1 AV                 | 54.0           | -15.9       | 2.89 H             | 85                   | 25.9             | 12.2                     |
| 3                                                    | 17865.00        | 51.7 PK                 | 74.0           | -22.3       | 1.60 H             | 189                  | 29.9             | 21.8                     |
| 4                                                    | 17865.00        | 42.1 AV                 | 54.0           | -11.9       | 1.60 H             | 189                  | 20.3             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 46.5 PK                 | 74.0           | -27.5       | 1.98 V             | 172                  | 34.3             | 12.2                     |
| 2                                                    | 11910.00        | 36.1 AV                 | 54.0           | -17.9       | 1.98 V             | 172                  | 23.9             | 12.2                     |
| 3                                                    | 17865.00        | 52.6 PK                 | 74.0           | -21.4       | 1.62 V             | 57                   | 30.8             | 21.8                     |
| 4                                                    | 17865.00        | 42.1 AV                 | 54.0           | -11.9       | 1.62 V             | 57                   | 20.3             | 21.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.8 PK                 | 88.2           | -40.4       | 2.89 H             | 108                  | 34.7             | 13.1                     |
| 2                                                    | #12830.00       | 37.8 AV                 | 68.2           | -30.4       | 2.89 H             | 108                  | 24.7             | 13.1                     |
| 3                                                    | 19245.00        | 52.5 PK                 | 74.0           | -21.5       | 1.64 H             | 191                  | 56.5             | -4.0                     |
| 4                                                    | 19245.00        | 42.6 AV                 | 54.0           | -11.4       | 1.64 H             | 191                  | 46.6             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 46.2 PK                 | 88.2           | -42.0       | 1.88 V             | 172                  | 33.1             | 13.1                     |
| 2                                                    | #12830.00       | 36.2 AV                 | 68.2           | -32.0       | 1.88 V             | 172                  | 23.1             | 13.1                     |
| 3                                                    | 19245.00        | 52.6 PK                 | 74.0           | -21.4       | 1.67 V             | 56                   | 56.6             | -4.0                     |
| 4                                                    | 19245.00        | 42.1 AV                 | 54.0           | -11.9       | 1.67 V             | 56                   | 46.1             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 97 : 6435 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 48.1 PK                 | 88.2           | -40.1       | 2.92 H             | 112                  | 34.8             | 13.3                     |
| 2                                                    | #12870.00       | 38.1 AV                 | 68.2           | -30.1       | 2.92 H             | 112                  | 24.8             | 13.3                     |
| 3                                                    | 19305.00        | 52.0 PK                 | 74.0           | -22.0       | 1.63 H             | 188                  | 55.9             | -3.9                     |
| 4                                                    | 19305.00        | 42.1 AV                 | 54.0           | -11.9       | 1.63 H             | 188                  | 46.0             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 46.0 PK                 | 88.2           | -42.2       | 1.93 V             | 179                  | 32.7             | 13.3                     |
| 2                                                    | #12870.00       | 36.0 AV                 | 68.2           | -32.2       | 1.93 V             | 179                  | 22.7             | 13.3                     |
| 3                                                    | 19305.00        | 51.9 PK                 | 74.0           | -22.1       | 1.60 V             | 54                   | 55.8             | -3.9                     |
| 4                                                    | 19305.00        | 41.6 AV                 | 54.0           | -12.4       | 1.60 V             | 54                   | 45.5             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 113 : 6515 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 47.6 PK                 | 88.2           | -40.6       | 2.94 H             | 95                   | 34.3             | 13.3                     |
| 2                                                    | #13030.00       | 37.9 AV                 | 68.2           | -30.3       | 2.94 H             | 95                   | 24.6             | 13.3                     |
| 3                                                    | 19545.00        | 51.5 PK                 | 74.0           | -22.5       | 1.57 H             | 183                  | 55.2             | -3.7                     |
| 4                                                    | 19545.00        | 41.8 AV                 | 54.0           | -12.2       | 1.57 H             | 183                  | 45.5             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 46.3 PK                 | 88.2           | -41.9       | 1.88 V             | 172                  | 33.0             | 13.3                     |
| 2                                                    | #13030.00       | 36.0 AV                 | 68.2           | -32.2       | 1.88 V             | 172                  | 22.7             | 13.3                     |
| 3                                                    | 19545.00        | 51.9 PK                 | 74.0           | -22.1       | 1.68 V             | 34                   | 55.6             | -3.7                     |
| 4                                                    | 19545.00        | 41.6 AV                 | 54.0           | -12.4       | 1.68 V             | 34                   | 45.3             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 48.9 PK                 | 88.2           | -39.3       | 2.95 H             | 128                  | 35.6             | 13.3                     |
| 2                                                    | #13070.00       | 38.1 AV                 | 68.2           | -30.1       | 2.95 H             | 128                  | 24.8             | 13.3                     |
| 3                                                    | 19605.00        | 50.4 PK                 | 74.0           | -23.6       | 1.46 H             | 163                  | 54.4             | -4.0                     |
| 4                                                    | 19605.00        | 41.4 AV                 | 54.0           | -12.6       | 1.46 H             | 163                  | 45.4             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 46.9 PK                 | 88.2           | -41.3       | 1.91 V             | 192                  | 33.6             | 13.3                     |
| 2                                                    | #13070.00       | 36.4 AV                 | 68.2           | -31.8       | 1.91 V             | 192                  | 23.1             | 13.3                     |
| 3                                                    | 19605.00        | 52.4 PK                 | 74.0           | -21.6       | 1.68 V             | 54                   | 56.4             | -4.0                     |
| 4                                                    | 19605.00        | 42.0 AV                 | 54.0           | -12.0       | 1.68 V             | 54                   | 46.0             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 185 : 6875 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 48.0 PK                 | 88.2           | -40.2       | 2.92 H             | 97                   | 32.8             | 15.2                     |
| 2                                                    | #13750.00       | 38.0 AV                 | 68.2           | -30.2       | 2.92 H             | 97                   | 22.8             | 15.2                     |
| 3                                                    | 20625.00        | 51.5 PK                 | 74.0           | -22.5       | 1.58 H             | 178                  | 54.8             | -3.3                     |
| 4                                                    | 20625.00        | 41.9 AV                 | 54.0           | -12.1       | 1.58 H             | 178                  | 45.2             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 47.1 PK                 | 88.2           | -41.1       | 1.97 V             | 173                  | 31.9             | 15.2                     |
| 2                                                    | #13750.00       | 36.7 AV                 | 68.2           | -31.5       | 1.97 V             | 173                  | 21.5             | 15.2                     |
| 3                                                    | 20625.00        | 52.2 PK                 | 74.0           | -21.8       | 1.66 V             | 61                   | 55.5             | -3.3                     |
| 4                                                    | 20625.00        | 41.8 AV                 | 54.0           | -12.2       | 1.66 V             | 61                   | 45.1             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 209 : 6995 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 47.7 PK                 | 88.2           | -40.5       | 3.00 H             | 87                   | 32.3             | 15.4                     |
| 2                                                    | #13990.00       | 38.0 AV                 | 68.2           | -30.2       | 3.00 H             | 87                   | 22.6             | 15.4                     |
| 3                                                    | 20985.00        | 52.1 PK                 | 74.0           | -21.9       | 1.65 H             | 177                  | 54.8             | -2.7                     |
| 4                                                    | 20985.00        | 42.3 AV                 | 54.0           | -11.7       | 1.65 H             | 177                  | 45.0             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 46.6 PK                 | 88.2           | -41.6       | 1.97 V             | 167                  | 31.2             | 15.4                     |
| 2                                                    | #13990.00       | 36.5 AV                 | 68.2           | -31.7       | 1.97 V             | 167                  | 21.1             | 15.4                     |
| 3                                                    | 20985.00        | 51.9 PK                 | 74.0           | -22.1       | 1.57 V             | 59                   | 54.6             | -2.7                     |
| 4                                                    | 20985.00        | 41.5 AV                 | 54.0           | -12.5       | 1.57 V             | 59                   | 44.2             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 233 : 7115 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 47.9 PK                 | 88.2           | -40.3       | 2.97 H             | 115                  | 32.6             | 15.3                     |
| 2                                                    | #14230.00       | 37.8 AV                 | 68.2           | -30.4       | 2.97 H             | 115                  | 22.5             | 15.3                     |
| 3                                                    | 21345.00        | 52.0 PK                 | 74.0           | -22.0       | 1.64 H             | 177                  | 54.2             | -2.2                     |
| 4                                                    | 21345.00        | 42.4 AV                 | 54.0           | -11.6       | 1.64 H             | 177                  | 44.6             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 46.9 PK                 | 88.2           | -41.3       | 1.92 V             | 171                  | 31.6             | 15.3                     |
| 2                                                    | #14230.00       | 36.6 AV                 | 68.2           | -31.6       | 1.92 V             | 171                  | 21.3             | 15.3                     |
| 3                                                    | 21345.00        | 51.5 PK                 | 74.0           | -22.5       | 1.60 V             | 53                   | 53.7             | -2.2                     |
| 4                                                    | 21345.00        | 41.5 AV                 | 54.0           | -12.5       | 1.60 V             | 53                   | 43.7             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 7 : 5985 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 47.7 PK                 | 74.0           | -26.3       | 2.93 H             | 112                  | 35.5             | 12.2                     |
| 2                                                    | 11970.00        | 37.9 AV                 | 54.0           | -16.1       | 2.93 H             | 112                  | 25.7             | 12.2                     |
| 3                                                    | 17955.00        | 52.1 PK                 | 74.0           | -21.9       | 1.60 H             | 172                  | 28.9             | 23.2                     |
| 4                                                    | 17955.00        | 42.2 AV                 | 54.0           | -11.8       | 1.60 H             | 172                  | 19.0             | 23.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 46.6 PK                 | 74.0           | -27.4       | 1.96 V             | 183                  | 34.4             | 12.2                     |
| 2                                                    | 11970.00        | 36.3 AV                 | 54.0           | -17.7       | 1.96 V             | 183                  | 24.1             | 12.2                     |
| 3                                                    | 17955.00        | 51.6 PK                 | 74.0           | -22.4       | 1.64 V             | 53                   | 28.4             | 23.2                     |
| 4                                                    | 17955.00        | 41.4 AV                 | 54.0           | -12.6       | 1.64 V             | 53                   | 18.2             | 23.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 87 : 6385 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12770.00       | 47.8 PK                 | 88.2           | -40.4       | 2.89 H             | 93                   | 34.7             | 13.1                     |
| 2                                                    | #12770.00       | 38.1 AV                 | 68.2           | -30.1       | 2.89 H             | 93                   | 25.0             | 13.1                     |
| 3                                                    | 19155.00        | 51.5 PK                 | 74.0           | -22.5       | 1.59 H             | 162                  | 55.7             | -4.2                     |
| 4                                                    | 19155.00        | 41.9 AV                 | 54.0           | -12.1       | 1.59 H             | 162                  | 46.1             | -4.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12770.00       | 47.2 PK                 | 88.2           | -41.0       | 1.93 V             | 181                  | 34.1             | 13.1                     |
| 2                                                    | #12770.00       | 36.9 AV                 | 68.2           | -31.3       | 1.93 V             | 181                  | 23.8             | 13.1                     |
| 3                                                    | 19155.00        | 52.0 PK                 | 74.0           | -22.0       | 1.62 V             | 43                   | 56.2             | -4.2                     |
| 4                                                    | 19155.00        | 41.7 AV                 | 54.0           | -12.3       | 1.62 V             | 43                   | 45.9             | -4.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 103 : 6465 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12930.00       | 47.7 PK                 | 88.2           | -40.5       | 2.94 H             | 99                   | 34.3             | 13.4                     |
| 2                                                    | #12930.00       | 37.9 AV                 | 68.2           | -30.3       | 2.94 H             | 99                   | 24.5             | 13.4                     |
| 3                                                    | 19395.00        | 52.1 PK                 | 74.0           | -21.9       | 1.63 H             | 184                  | 55.6             | -3.5                     |
| 4                                                    | 19395.00        | 42.6 AV                 | 54.0           | -11.4       | 1.63 H             | 184                  | 46.1             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12930.00       | 47.2 PK                 | 88.2           | -41.0       | 1.94 V             | 178                  | 33.8             | 13.4                     |
| 2                                                    | #12930.00       | 36.7 AV                 | 68.2           | -31.5       | 1.94 V             | 178                  | 23.3             | 13.4                     |
| 3                                                    | 19395.00        | 52.2 PK                 | 74.0           | -21.8       | 1.68 V             | 47                   | 55.7             | -3.5                     |
| 4                                                    | 19395.00        | 42.2 AV                 | 54.0           | -11.8       | 1.68 V             | 47                   | 45.7             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 119 : 6545 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13090.00       | 48.9 PK                 | 88.2           | -39.3       | 2.94 H             | 104                  | 35.4             | 13.5                     |
| 2                                                    | #13090.00       | 38.3 AV                 | 68.2           | -29.9       | 2.94 H             | 104                  | 24.8             | 13.5                     |
| 3                                                    | 19635.00        | 50.5 PK                 | 74.0           | -23.5       | 1.53 H             | 176                  | 54.5             | -4.0                     |
| 4                                                    | 19635.00        | 41.5 AV                 | 54.0           | -12.5       | 1.53 H             | 176                  | 45.5             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13090.00       | 47.1 PK                 | 88.2           | -41.1       | 1.94 V             | 169                  | 33.6             | 13.5                     |
| 2                                                    | #13090.00       | 36.8 AV                 | 68.2           | -31.4       | 1.94 V             | 169                  | 23.3             | 13.5                     |
| 3                                                    | 19635.00        | 52.4 PK                 | 74.0           | -21.6       | 1.67 V             | 50                   | 56.4             | -4.0                     |
| 4                                                    | 19635.00        | 42.1 AV                 | 54.0           | -11.9       | 1.67 V             | 50                   | 46.1             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 183 : 6865 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13730.00       | 49.4 PK                 | 88.2           | -38.8       | 2.93 H             | 95                   | 34.3             | 15.1                     |
| 2                                                    | #13730.00       | 38.5 AV                 | 68.2           | -29.7       | 2.93 H             | 95                   | 23.4             | 15.1                     |
| 3                                                    | 20595.00        | 50.8 PK                 | 74.0           | -23.2       | 1.51 H             | 166                  | 54.2             | -3.4                     |
| 4                                                    | 20595.00        | 41.8 AV                 | 54.0           | -12.2       | 1.51 H             | 166                  | 45.2             | -3.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13730.00       | 47.4 PK                 | 88.2           | -40.8       | 1.87 V             | 181                  | 32.3             | 15.1                     |
| 2                                                    | #13730.00       | 37.0 AV                 | 68.2           | -31.2       | 1.87 V             | 181                  | 21.9             | 15.1                     |
| 3                                                    | 20595.00        | 52.1 PK                 | 74.0           | -21.9       | 1.62 V             | 62                   | 55.5             | -3.4                     |
| 4                                                    | 20595.00        | 42.1 AV                 | 54.0           | -11.9       | 1.62 V             | 62                   | 45.5             | -3.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 199 : 6945 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13890.00       | 48.1 PK                 | 88.2           | -40.1       | 2.93 H             | 126                  | 33.2             | 14.9                     |
| 2                                                    | #13890.00       | 37.4 AV                 | 68.2           | -30.8       | 2.93 H             | 126                  | 22.5             | 14.9                     |
| 3                                                    | 20835.00        | 50.4 PK                 | 74.0           | -23.6       | 1.52 H             | 169                  | 53.1             | -2.7                     |
| 4                                                    | 20835.00        | 41.1 AV                 | 54.0           | -12.9       | 1.52 H             | 169                  | 43.8             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13890.00       | 46.9 PK                 | 88.2           | -41.3       | 1.90 V             | 193                  | 32.0             | 14.9                     |
| 2                                                    | #13890.00       | 36.6 AV                 | 68.2           | -31.6       | 1.90 V             | 193                  | 21.7             | 14.9                     |
| 3                                                    | 20835.00        | 52.3 PK                 | 74.0           | -21.7       | 1.67 V             | 52                   | 55.0             | -2.7                     |
| 4                                                    | 20835.00        | 41.8 AV                 | 54.0           | -12.2       | 1.67 V             | 52                   | 44.5             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 215 : 7025 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14050.00       | 49.0 PK                 | 88.2           | -39.2       | 3.00 H             | 112                  | 33.6             | 15.4                     |
| 2                                                    | #14050.00       | 38.2 AV                 | 68.2           | -30.0       | 3.00 H             | 112                  | 22.8             | 15.4                     |
| 3                                                    | 21075.00        | 50.6 PK                 | 74.0           | -23.4       | 1.59 H             | 185                  | 53.3             | -2.7                     |
| 4                                                    | 21075.00        | 41.4 AV                 | 54.0           | -12.6       | 1.59 H             | 185                  | 44.1             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14050.00       | 46.1 PK                 | 88.2           | -42.1       | 1.90 V             | 183                  | 30.7             | 15.4                     |
| 2                                                    | #14050.00       | 36.1 AV                 | 68.2           | -32.1       | 1.90 V             | 183                  | 20.7             | 15.4                     |
| 3                                                    | 21075.00        | 52.4 PK                 | 74.0           | -21.6       | 1.61 V             | 55                   | 55.1             | -2.7                     |
| 4                                                    | 21075.00        | 42.2 AV                 | 54.0           | -11.8       | 1.61 V             | 55                   | 44.9             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                    |                                          |                                                                      |
|-----------------------------|------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) 996+484-tone MRU | <b>Channel</b>                           | CH 15 : 6025 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                     | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                     | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                          |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 49.0 PK                 | 74.0           | -25.0       | 2.91 H             | 114                  | 36.5             | 12.5                     |
| 2                                                    | 12050.00        | 38.2 AV                 | 54.0           | -15.8       | 2.91 H             | 114                  | 25.7             | 12.5                     |
| 3                                                    | 18075.00        | 50.9 PK                 | 74.0           | -23.1       | 1.50 H             | 187                  | 55.4             | -4.5                     |
| 4                                                    | 18075.00        | 42.0 AV                 | 54.0           | -12.0       | 1.50 H             | 187                  | 46.5             | -4.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 46.8 PK                 | 74.0           | -27.2       | 1.96 V             | 182                  | 34.3             | 12.5                     |
| 2                                                    | 12050.00        | 36.6 AV                 | 54.0           | -17.4       | 1.96 V             | 182                  | 24.1             | 12.5                     |
| 3                                                    | 18075.00        | 52.0 PK                 | 74.0           | -22.0       | 1.58 V             | 46                   | 56.5             | -4.5                     |
| 4                                                    | 18075.00        | 41.6 AV                 | 54.0           | -12.4       | 1.58 V             | 46                   | 46.1             | -4.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                    |                                          |                                                                      |
|-----------------------------|------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) 996+484-tone MRU | <b>Channel</b>                           | CH 79 : 6345 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                     | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                     | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                          |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 49.4 PK                 | 74.0           | -24.6       | 2.92 H             | 92                   | 36.4             | 13.0                     |
| 2                                                    | 12690.00        | 38.7 AV                 | 54.0           | -15.3       | 2.92 H             | 92                   | 25.7             | 13.0                     |
| 3                                                    | 19035.00        | 50.1 PK                 | 74.0           | -23.9       | 1.53 H             | 163                  | 54.2             | -4.1                     |
| 4                                                    | 19035.00        | 41.0 AV                 | 54.0           | -13.0       | 1.53 H             | 163                  | 45.1             | -4.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 47.0 PK                 | 74.0           | -27.0       | 1.91 V             | 187                  | 34.0             | 13.0                     |
| 2                                                    | 12690.00        | 37.0 AV                 | 54.0           | -17.0       | 1.91 V             | 187                  | 24.0             | 13.0                     |
| 3                                                    | 19035.00        | 51.9 PK                 | 74.0           | -22.1       | 1.58 V             | 48                   | 56.0             | -4.1                     |
| 4                                                    | 19035.00        | 41.5 AV                 | 54.0           | -12.5       | 1.58 V             | 48                   | 45.6             | -4.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                    |                                          |                                                                      |
|-----------------------------|------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) 996+484-tone MRU | <b>Channel</b>                           | CH 111 : 6505 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                     | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                     | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                          |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13010.00       | 48.5 PK                 | 88.2           | -39.7       | 2.95 H             | 92                   | 35.3             | 13.2                     |
| 2                                                    | #13010.00       | 38.2 AV                 | 68.2           | -30.0       | 2.95 H             | 92                   | 25.0             | 13.2                     |
| 3                                                    | 19515.00        | 50.7 PK                 | 74.0           | -23.3       | 1.56 H             | 181                  | 54.2             | -3.5                     |
| 4                                                    | 19515.00        | 41.4 AV                 | 54.0           | -12.6       | 1.56 H             | 181                  | 44.9             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13010.00       | 47.1 PK                 | 88.2           | -41.1       | 1.96 V             | 163                  | 33.9             | 13.2                     |
| 2                                                    | #13010.00       | 36.7 AV                 | 68.2           | -31.5       | 1.96 V             | 163                  | 23.5             | 13.2                     |
| 3                                                    | 19515.00        | 52.2 PK                 | 74.0           | -21.8       | 1.59 V             | 38                   | 55.7             | -3.5                     |
| 4                                                    | 19515.00        | 42.0 AV                 | 54.0           | -12.0       | 1.59 V             | 38                   | 45.5             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                    |                                          |                                                                      |
|-----------------------------|------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) 996+484-tone MRU | <b>Channel</b>                           | CH 143 : 6665 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                     | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                     | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                          |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 49.3 PK                 | 74.0           | -24.7       | 2.98 H             | 101                  | 35.5             | 13.8                     |
| 2                                                    | 13330.00        | 38.7 AV                 | 54.0           | -15.3       | 2.98 H             | 101                  | 24.9             | 13.8                     |
| 3                                                    | 19995.00        | 50.0 PK                 | 74.0           | -24.0       | 1.47 H             | 161                  | 53.8             | -3.8                     |
| 4                                                    | 19995.00        | 41.1 AV                 | 54.0           | -12.9       | 1.47 H             | 161                  | 44.9             | -3.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 47.1 PK                 | 74.0           | -26.9       | 1.91 V             | 174                  | 33.3             | 13.8                     |
| 2                                                    | 13330.00        | 36.7 AV                 | 54.0           | -17.3       | 1.91 V             | 174                  | 22.9             | 13.8                     |
| 3                                                    | 19995.00        | 52.5 PK                 | 74.0           | -21.5       | 1.62 V             | 43                   | 56.3             | -3.8                     |
| 4                                                    | 19995.00        | 42.2 AV                 | 54.0           | -11.8       | 1.62 V             | 43                   | 46.0             | -3.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                    |                                          |                                                                      |
|-----------------------------|------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) 996+484-tone MRU | <b>Channel</b>                           | CH 175 : 6825 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                     | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                     | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                          |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13650.00       | 48.7 PK                 | 88.2           | -39.5       | 2.90 H             | 90                   | 33.6             | 15.1                     |
| 2                                                    | #13650.00       | 38.1 AV                 | 68.2           | -30.1       | 2.90 H             | 90                   | 23.0             | 15.1                     |
| 3                                                    | 20475.00        | 50.8 PK                 | 74.0           | -23.2       | 1.56 H             | 175                  | 53.7             | -2.9                     |
| 4                                                    | 20475.00        | 41.6 AV                 | 54.0           | -12.4       | 1.56 H             | 175                  | 44.5             | -2.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13650.00       | 46.6 PK                 | 88.2           | -41.6       | 1.87 V             | 178                  | 31.5             | 15.1                     |
| 2                                                    | #13650.00       | 36.7 AV                 | 68.2           | -31.5       | 1.87 V             | 178                  | 21.6             | 15.1                     |
| 3                                                    | 20475.00        | 51.9 PK                 | 74.0           | -22.1       | 1.57 V             | 41                   | 54.8             | -2.9                     |
| 4                                                    | 20475.00        | 41.5 AV                 | 54.0           | -12.5       | 1.57 V             | 41                   | 44.4             | -2.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                    |                                          |                                                                      |
|-----------------------------|------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) 996+484-tone MRU | <b>Channel</b>                           | CH 207 : 6985 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                     | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                     | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                          |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13970.00       | 48.3 PK                 | 88.2           | -39.9       | 2.89 H             | 95                   | 33.0             | 15.3                     |
| 2                                                    | #13970.00       | 37.8 AV                 | 68.2           | -30.4       | 2.89 H             | 95                   | 22.5             | 15.3                     |
| 3                                                    | 20955.00        | 50.8 PK                 | 74.0           | -23.2       | 1.56 H             | 180                  | 53.4             | -2.6                     |
| 4                                                    | 20955.00        | 41.6 AV                 | 54.0           | -12.4       | 1.56 H             | 180                  | 44.2             | -2.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13970.00       | 46.6 PK                 | 88.2           | -41.6       | 1.95 V             | 191                  | 31.3             | 15.3                     |
| 2                                                    | #13970.00       | 36.6 AV                 | 68.2           | -31.6       | 1.95 V             | 191                  | 21.3             | 15.3                     |
| 3                                                    | 20955.00        | 51.9 PK                 | 74.0           | -22.1       | 1.58 V             | 45                   | 54.5             | -2.6                     |
| 4                                                    | 20955.00        | 41.9 AV                 | 54.0           | -12.1       | 1.58 V             | 45                   | 44.5             | -2.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                           |                                          |                                                                      |
|-----------------------------|-------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>996+484+242-tone MRU | <b>Channel</b>                           | CH 15 : 6025 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                            | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                            | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                 |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 48.7 PK                 | 74.0           | -25.3       | 3.00 H             | 106                  | 36.2             | 12.5                     |
| 2                                                    | 12050.00        | 37.8 AV                 | 54.0           | -16.2       | 3.00 H             | 106                  | 25.3             | 12.5                     |
| 3                                                    | 18075.00        | 50.8 PK                 | 74.0           | -23.2       | 1.58 H             | 170                  | 55.3             | -4.5                     |
| 4                                                    | 18075.00        | 41.7 AV                 | 54.0           | -12.3       | 1.58 H             | 170                  | 46.2             | -4.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 46.6 PK                 | 74.0           | -27.4       | 1.98 V             | 190                  | 34.1             | 12.5                     |
| 2                                                    | 12050.00        | 36.5 AV                 | 54.0           | -17.5       | 1.98 V             | 190                  | 24.0             | 12.5                     |
| 3                                                    | 18075.00        | 51.9 PK                 | 74.0           | -22.1       | 1.69 V             | 61                   | 56.4             | -4.5                     |
| 4                                                    | 18075.00        | 41.8 AV                 | 54.0           | -12.2       | 1.69 V             | 61                   | 46.3             | -4.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                           |                                          |                                                                      |
|-----------------------------|-------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>996+484+242-tone MRU | <b>Channel</b>                           | CH 79 : 6345 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                            | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                            | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                 |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 48.7 PK                 | 74.0           | -25.3       | 2.98 H             | 105                  | 35.7             | 13.0                     |
| 2                                                    | 12690.00        | 38.1 AV                 | 54.0           | -15.9       | 2.98 H             | 105                  | 25.1             | 13.0                     |
| 3                                                    | 19035.00        | 50.3 PK                 | 74.0           | -23.7       | 1.58 H             | 168                  | 54.4             | -4.1                     |
| 4                                                    | 19035.00        | 41.4 AV                 | 54.0           | -12.6       | 1.58 H             | 168                  | 45.5             | -4.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 47.0 PK                 | 74.0           | -27.0       | 1.96 V             | 175                  | 34.0             | 13.0                     |
| 2                                                    | 12690.00        | 36.8 AV                 | 54.0           | -17.2       | 1.96 V             | 175                  | 23.8             | 13.0                     |
| 3                                                    | 19035.00        | 52.0 PK                 | 74.0           | -22.0       | 1.62 V             | 47                   | 56.1             | -4.1                     |
| 4                                                    | 19035.00        | 41.5 AV                 | 54.0           | -12.5       | 1.62 V             | 47                   | 45.6             | -4.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                           |                                          |                                                                      |
|-----------------------------|-------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>996+484+242-tone MRU | <b>Channel</b>                           | CH 111 : 6505 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                            | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                            | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                 |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13010.00       | 48.4 PK                 | 88.2           | -39.8       | 2.97 H             | 103                  | 35.2             | 13.2                     |
| 2                                                    | #13010.00       | 38.0 AV                 | 68.2           | -30.2       | 2.97 H             | 103                  | 24.8             | 13.2                     |
| 3                                                    | 19515.00        | 50.5 PK                 | 74.0           | -23.5       | 1.57 H             | 180                  | 54.0             | -3.5                     |
| 4                                                    | 19515.00        | 41.6 AV                 | 54.0           | -12.4       | 1.57 H             | 180                  | 45.1             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13010.00       | 46.8 PK                 | 88.2           | -41.4       | 1.93 V             | 180                  | 33.6             | 13.2                     |
| 2                                                    | #13010.00       | 36.7 AV                 | 68.2           | -31.5       | 1.93 V             | 180                  | 23.5             | 13.2                     |
| 3                                                    | 19515.00        | 51.5 PK                 | 74.0           | -22.5       | 1.63 V             | 36                   | 55.0             | -3.5                     |
| 4                                                    | 19515.00        | 41.4 AV                 | 54.0           | -12.6       | 1.63 V             | 36                   | 44.9             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                           |                                          |                                                                      |
|-----------------------------|-------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>996+484+242-tone MRU | <b>Channel</b>                           | CH 143 : 6665 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                            | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                            | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                 |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 49.4 PK                 | 74.0           | -24.6       | 2.93 H             | 107                  | 35.6             | 13.8                     |
| 2                                                    | 13330.00        | 38.6 AV                 | 54.0           | -15.4       | 2.93 H             | 107                  | 24.8             | 13.8                     |
| 3                                                    | 19995.00        | 50.8 PK                 | 74.0           | -23.2       | 1.54 H             | 174                  | 54.6             | -3.8                     |
| 4                                                    | 19995.00        | 41.8 AV                 | 54.0           | -12.2       | 1.54 H             | 174                  | 45.6             | -3.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 47.1 PK                 | 74.0           | -26.9       | 1.95 V             | 167                  | 33.3             | 13.8                     |
| 2                                                    | 13330.00        | 36.8 AV                 | 54.0           | -17.2       | 1.95 V             | 167                  | 23.0             | 13.8                     |
| 3                                                    | 19995.00        | 51.4 PK                 | 74.0           | -22.6       | 1.66 V             | 41                   | 55.2             | -3.8                     |
| 4                                                    | 19995.00        | 41.4 AV                 | 54.0           | -12.6       | 1.66 V             | 41                   | 45.2             | -3.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                           |                                          |                                                                      |
|-----------------------------|-------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>996+484+242-tone MRU | <b>Channel</b>                           | CH 175 : 6825 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                            | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                            | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                 |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13650.00       | 48.5 PK                 | 88.2           | -39.7       | 2.96 H             | 90                   | 33.4             | 15.1                     |
| 2                                                    | #13650.00       | 37.9 AV                 | 68.2           | -30.3       | 2.96 H             | 90                   | 22.8             | 15.1                     |
| 3                                                    | 20475.00        | 50.8 PK                 | 74.0           | -23.2       | 1.58 H             | 187                  | 53.7             | -2.9                     |
| 4                                                    | 20475.00        | 42.0 AV                 | 54.0           | -12.0       | 1.58 H             | 187                  | 44.9             | -2.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13650.00       | 46.3 PK                 | 88.2           | -41.9       | 1.99 V             | 165                  | 31.2             | 15.1                     |
| 2                                                    | #13650.00       | 36.3 AV                 | 68.2           | -31.9       | 1.99 V             | 165                  | 21.2             | 15.1                     |
| 3                                                    | 20475.00        | 52.7 PK                 | 74.0           | -21.3       | 1.59 V             | 52                   | 55.6             | -2.9                     |
| 4                                                    | 20475.00        | 42.2 AV                 | 54.0           | -11.8       | 1.59 V             | 52                   | 45.1             | -2.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                           |                                          |                                                                      |
|-----------------------------|-------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>996+484+242-tone MRU | <b>Channel</b>                           | CH 207 : 6985 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                            | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                            | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                 |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13970.00       | 49.5 PK                 | 88.2           | -38.7       | 2.89 H             | 115                  | 34.2             | 15.3                     |
| 2                                                    | #13970.00       | 38.8 AV                 | 68.2           | -29.4       | 2.89 H             | 115                  | 23.5             | 15.3                     |
| 3                                                    | 20955.00        | 50.9 PK                 | 74.0           | -23.1       | 1.48 H             | 161                  | 53.5             | -2.6                     |
| 4                                                    | 20955.00        | 41.7 AV                 | 54.0           | -12.3       | 1.48 H             | 161                  | 44.3             | -2.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13970.00       | 46.6 PK                 | 88.2           | -41.6       | 1.96 V             | 164                  | 31.3             | 15.3                     |
| 2                                                    | #13970.00       | 36.7 AV                 | 68.2           | -31.5       | 1.96 V             | 164                  | 21.4             | 15.3                     |
| 3                                                    | 20955.00        | 51.9 PK                 | 74.0           | -22.1       | 1.59 V             | 33                   | 54.5             | -2.6                     |
| 4                                                    | 20955.00        | 41.7 AV                 | 54.0           | -12.3       | 1.59 V             | 33                   | 44.3             | -2.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

## 2TX

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 1 : 5955 MHz                                                       |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 50.3 PK                 | 74.0           | -23.7       | 2.94 H             | 98                   | 38.1             | 12.2                     |
| 2                                                    | 11910.00        | 39.5 AV                 | 54.0           | -14.5       | 2.94 H             | 98                   | 27.3             | 12.2                     |
| 3                                                    | 17865.00        | 54.3 PK                 | 74.0           | -19.7       | 1.44 H             | 217                  | 32.5             | 21.8                     |
| 4                                                    | 17865.00        | 43.8 AV                 | 54.0           | -10.2       | 1.44 H             | 217                  | 22.0             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.7 PK                 | 74.0           | -26.3       | 2.00 V             | 206                  | 35.5             | 12.2                     |
| 2                                                    | 11910.00        | 39.1 AV                 | 54.0           | -14.9       | 2.00 V             | 206                  | 26.9             | 12.2                     |
| 3                                                    | 17865.00        | 54.8 PK                 | 74.0           | -19.2       | 1.84 V             | 83                   | 33.0             | 21.8                     |
| 4                                                    | 17865.00        | 43.4 AV                 | 54.0           | -10.6       | 1.84 V             | 83                   | 21.6             | 21.8                     |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 45 : 6175 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 50.6 PK                 | 74.0           | -23.4       | 2.94 H             | 100                  | 38.2             | 12.4                     |
| 2                                                    | 12350.00        | 39.7 AV                 | 54.0           | -14.3       | 2.94 H             | 100                  | 27.3             | 12.4                     |
| 3                                                    | 18525.00        | 53.9 PK                 | 74.0           | -20.1       | 1.41 H             | 222                  | 58.6             | -4.7                     |
| 4                                                    | 18525.00        | 43.3 AV                 | 54.0           | -10.7       | 1.41 H             | 222                  | 48.0             | -4.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.5 PK                 | 74.0           | -26.5       | 2.04 V             | 199                  | 35.1             | 12.4                     |
| 2                                                    | 12350.00        | 38.8 AV                 | 54.0           | -15.2       | 2.04 V             | 199                  | 26.4             | 12.4                     |
| 3                                                    | 18525.00        | 54.9 PK                 | 74.0           | -19.1       | 1.83 V             | 85                   | 59.6             | -4.7                     |
| 4                                                    | 18525.00        | 43.3 AV                 | 54.0           | -10.7       | 1.83 V             | 85                   | 48.0             | -4.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 93 : 6415 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 50.1 PK                 | 88.2           | -38.1       | 2.91 H             | 88                   | 37.0             | 13.1                     |
| 2                                                    | #12830.00       | 39.2 AV                 | 68.2           | -29.0       | 2.91 H             | 88                   | 26.1             | 13.1                     |
| 3                                                    | 19245.00        | 54.8 PK                 | 74.0           | -19.2       | 1.41 H             | 229                  | 58.8             | -4.0                     |
| 4                                                    | 19245.00        | 44.1 AV                 | 54.0           | -9.9        | 1.41 H             | 229                  | 48.1             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.6 PK                 | 88.2           | -40.6       | 1.96 V             | 198                  | 34.5             | 13.1                     |
| 2                                                    | #12830.00       | 38.8 AV                 | 68.2           | -29.4       | 1.96 V             | 198                  | 25.7             | 13.1                     |
| 3                                                    | 19245.00        | 54.7 PK                 | 74.0           | -19.3       | 1.83 V             | 76                   | 58.7             | -4.0                     |
| 4                                                    | 19245.00        | 43.2 AV                 | 54.0           | -10.8       | 1.83 V             | 76                   | 47.2             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 97 : 6435 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 50.8 PK                 | 88.2           | -37.4       | 2.91 H             | 92                   | 37.5             | 13.3                     |
| 2                                                    | #12870.00       | 39.7 AV                 | 68.2           | -28.5       | 2.91 H             | 92                   | 26.4             | 13.3                     |
| 3                                                    | 19305.00        | 54.5 PK                 | 74.0           | -19.5       | 1.38 H             | 208                  | 58.4             | -3.9                     |
| 4                                                    | 19305.00        | 43.8 AV                 | 54.0           | -10.2       | 1.38 H             | 208                  | 47.7             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 47.8 PK                 | 88.2           | -40.4       | 1.99 V             | 199                  | 34.5             | 13.3                     |
| 2                                                    | #12870.00       | 39.4 AV                 | 68.2           | -28.8       | 1.99 V             | 199                  | 26.1             | 13.3                     |
| 3                                                    | 19305.00        | 54.8 PK                 | 74.0           | -19.2       | 1.82 V             | 94                   | 58.7             | -3.9                     |
| 4                                                    | 19305.00        | 43.5 AV                 | 54.0           | -10.5       | 1.82 V             | 94                   | 47.4             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                      |                |                               |                                                                       |
|----------------------|----------------|-------------------------------|-----------------------------------------------------------------------|
| RF Mode              | 802.11a        | Channel                       | CH 105 : 6475 MHz                                                     |
| Frequency Range      | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions      | 24 °C, 72 % RH                                                        |
| Tested By            | Willy Lin      |                               |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12950.00       | 49.6 PK                 | 88.2           | -38.6       | 2.99 H             | 84                   | 36.3             | 13.3                     |
| 2                                                    | #12950.00       | 39.1 AV                 | 68.2           | -29.1       | 2.99 H             | 84                   | 25.8             | 13.3                     |
| 3                                                    | 19425.00        | 53.8 PK                 | 74.0           | -20.2       | 1.39 H             | 230                  | 57.3             | -3.5                     |
| 4                                                    | 19425.00        | 43.3 AV                 | 54.0           | -10.7       | 1.39 H             | 230                  | 46.8             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12950.00       | 47.8 PK                 | 88.2           | -40.4       | 2.03 V             | 209                  | 34.5             | 13.3                     |
| 2                                                    | #12950.00       | 39.1 AV                 | 68.2           | -29.1       | 2.03 V             | 209                  | 25.8             | 13.3                     |
| 3                                                    | 19425.00        | 54.6 PK                 | 74.0           | -19.4       | 1.85 V             | 77                   | 58.1             | -3.5                     |
| 4                                                    | 19425.00        | 43.2 AV                 | 54.0           | -10.8       | 1.85 V             | 77                   | 46.7             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 113 : 6515 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 50.4 PK                 | 88.2           | -37.8       | 2.88 H             | 104                  | 37.1             | 13.3                     |
| 2                                                    | #13030.00       | 39.7 AV                 | 68.2           | -28.5       | 2.88 H             | 104                  | 26.4             | 13.3                     |
| 3                                                    | 19545.00        | 54.0 PK                 | 74.0           | -20.0       | 1.42 H             | 206                  | 57.7             | -3.7                     |
| 4                                                    | 19545.00        | 43.6 AV                 | 54.0           | -10.4       | 1.42 H             | 206                  | 47.3             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 47.7 PK                 | 88.2           | -40.5       | 1.97 V             | 212                  | 34.4             | 13.3                     |
| 2                                                    | #13030.00       | 39.3 AV                 | 68.2           | -28.9       | 1.97 V             | 212                  | 26.0             | 13.3                     |
| 3                                                    | 19545.00        | 55.1 PK                 | 74.0           | -18.9       | 1.81 V             | 97                   | 58.8             | -3.7                     |
| 4                                                    | 19545.00        | 43.5 AV                 | 54.0           | -10.5       | 1.81 V             | 97                   | 47.2             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 117 : 6535 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 50.3 PK                 | 88.2           | -37.9       | 2.93 H             | 95                   | 37.0             | 13.3                     |
| 2                                                    | #13070.00       | 39.3 AV                 | 68.2           | -28.9       | 2.93 H             | 95                   | 26.0             | 13.3                     |
| 3                                                    | 19605.00        | 53.9 PK                 | 74.0           | -20.1       | 1.49 H             | 224                  | 57.9             | -4.0                     |
| 4                                                    | 19605.00        | 43.3 AV                 | 54.0           | -10.7       | 1.49 H             | 224                  | 47.3             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 48.3 PK                 | 88.2           | -39.9       | 2.02 V             | 205                  | 35.0             | 13.3                     |
| 2                                                    | #13070.00       | 39.6 AV                 | 68.2           | -28.6       | 2.02 V             | 205                  | 26.3             | 13.3                     |
| 3                                                    | 19605.00        | 54.7 PK                 | 74.0           | -19.3       | 1.84 V             | 89                   | 58.7             | -4.0                     |
| 4                                                    | 19605.00        | 43.0 AV                 | 54.0           | -11.0       | 1.84 V             | 89                   | 47.0             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 149 : 6695 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 50.0 PK                 | 74.0           | -24.0       | 2.96 H             | 109                  | 35.9             | 14.1                     |
| 2                                                    | 13390.00        | 39.4 AV                 | 54.0           | -14.6       | 2.96 H             | 109                  | 25.3             | 14.1                     |
| 3                                                    | 20085.00        | 54.9 PK                 | 74.0           | -19.1       | 1.44 H             | 231                  | 58.3             | -3.4                     |
| 4                                                    | 20085.00        | 44.3 AV                 | 54.0           | -9.7        | 1.44 H             | 231                  | 47.7             | -3.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 47.7 PK                 | 74.0           | -26.3       | 1.95 V             | 192                  | 33.6             | 14.1                     |
| 2                                                    | 13390.00        | 38.8 AV                 | 54.0           | -15.2       | 1.95 V             | 192                  | 24.7             | 14.1                     |
| 3                                                    | 20085.00        | 54.2 PK                 | 74.0           | -19.8       | 1.81 V             | 91                   | 57.6             | -3.4                     |
| 4                                                    | 20085.00        | 43.1 AV                 | 54.0           | -10.9       | 1.81 V             | 91                   | 46.5             | -3.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 181 : 6855 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 50.4 PK                 | 88.2           | -37.8       | 2.93 H             | 93                   | 35.2             | 15.2                     |
| 2                                                    | #13710.00       | 39.4 AV                 | 68.2           | -28.8       | 2.93 H             | 93                   | 24.2             | 15.2                     |
| 3                                                    | 20565.00        | 54.7 PK                 | 74.0           | -19.3       | 1.40 H             | 226                  | 57.9             | -3.2                     |
| 4                                                    | 20565.00        | 43.9 AV                 | 54.0           | -10.1       | 1.40 H             | 226                  | 47.1             | -3.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.5 PK                 | 88.2           | -40.7       | 1.98 V             | 216                  | 32.3             | 15.2                     |
| 2                                                    | #13710.00       | 38.8 AV                 | 68.2           | -29.4       | 1.98 V             | 216                  | 23.6             | 15.2                     |
| 3                                                    | 20565.00        | 54.5 PK                 | 74.0           | -19.5       | 1.87 V             | 69                   | 57.7             | -3.2                     |
| 4                                                    | 20565.00        | 43.0 AV                 | 54.0           | -11.0       | 1.87 V             | 69                   | 46.2             | -3.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                      |                |                               |                                                                       |
|----------------------|----------------|-------------------------------|-----------------------------------------------------------------------|
| RF Mode              | 802.11a        | Channel                       | CH 185 : 6875 MHz                                                     |
| Frequency Range      | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions      | 24 °C, 72 % RH                                                        |
| Tested By            | Willy Lin      |                               |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 50.9 PK                 | 88.2           | -37.3       | 2.93 H             | 113                  | 35.7             | 15.2                     |
| 2                                                    | #13750.00       | 39.9 AV                 | 68.2           | -28.3       | 2.93 H             | 113                  | 24.7             | 15.2                     |
| 3                                                    | 20625.00        | 54.2 PK                 | 74.0           | -19.8       | 1.41 H             | 202                  | 57.5             | -3.3                     |
| 4                                                    | 20625.00        | 43.7 AV                 | 54.0           | -10.3       | 1.41 H             | 202                  | 47.0             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 47.8 PK                 | 88.2           | -40.4       | 1.99 V             | 199                  | 32.6             | 15.2                     |
| 2                                                    | #13750.00       | 39.1 AV                 | 68.2           | -29.1       | 1.99 V             | 199                  | 23.9             | 15.2                     |
| 3                                                    | 20625.00        | 54.7 PK                 | 74.0           | -19.3       | 1.87 V             | 84                   | 58.0             | -3.3                     |
| 4                                                    | 20625.00        | 43.5 AV                 | 54.0           | -10.5       | 1.87 V             | 84                   | 46.8             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 209 : 6995 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 50.0 PK                 | 88.2           | -38.2       | 3.00 H             | 109                  | 34.6             | 15.4                     |
| 2                                                    | #13990.00       | 39.3 AV                 | 68.2           | -28.9       | 3.00 H             | 109                  | 23.9             | 15.4                     |
| 3                                                    | 20985.00        | 54.1 PK                 | 74.0           | -19.9       | 1.41 H             | 230                  | 56.8             | -2.7                     |
| 4                                                    | 20985.00        | 43.6 AV                 | 54.0           | -10.4       | 1.41 H             | 230                  | 46.3             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 47.7 PK                 | 88.2           | -40.5       | 1.96 V             | 192                  | 32.3             | 15.4                     |
| 2                                                    | #13990.00       | 38.9 AV                 | 68.2           | -29.3       | 1.96 V             | 192                  | 23.5             | 15.4                     |
| 3                                                    | 20985.00        | 55.1 PK                 | 74.0           | -18.9       | 1.79 V             | 80                   | 57.8             | -2.7                     |
| 4                                                    | 20985.00        | 43.9 AV                 | 54.0           | -10.1       | 1.79 V             | 80                   | 46.6             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                       |
|-----------------------------|----------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 233 : 7115 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 50.6 PK                 | 88.2           | -37.6       | 2.97 H             | 103                  | 35.3             | 15.3                     |
| 2                                                    | #14230.00       | 39.8 AV                 | 68.2           | -28.4       | 2.97 H             | 103                  | 24.5             | 15.3                     |
| 3                                                    | 21345.00        | 54.0 PK                 | 74.0           | -20.0       | 1.40 H             | 214                  | 56.2             | -2.2                     |
| 4                                                    | 21345.00        | 43.4 AV                 | 54.0           | -10.6       | 1.40 H             | 214                  | 45.6             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 47.0 PK                 | 88.2           | -41.2       | 1.98 V             | 211                  | 31.7             | 15.3                     |
| 2                                                    | #14230.00       | 38.7 AV                 | 68.2           | -29.5       | 1.98 V             | 211                  | 23.4             | 15.3                     |
| 3                                                    | 21345.00        | 54.6 PK                 | 74.0           | -19.4       | 1.88 V             | 86                   | 56.8             | -2.2                     |
| 4                                                    | 21345.00        | 43.3 AV                 | 54.0           | -10.7       | 1.88 V             | 86                   | 45.5             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

## 2S2T

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 1 : 5955 MHz                                                       |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 49.8 PK                 | 74.0           | -24.2       | 2.94 H             | 95                   | 37.6             | 12.2                     |
| 2                                                    | 11910.00        | 39.2 AV                 | 54.0           | -14.8       | 2.94 H             | 95                   | 27.0             | 12.2                     |
| 3                                                    | 17865.00        | 54.7 PK                 | 74.0           | -19.3       | 1.43 H             | 231                  | 32.9             | 21.8                     |
| 4                                                    | 17865.00        | 43.9 AV                 | 54.0           | -10.1       | 1.43 H             | 231                  | 22.1             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 46.8 PK                 | 74.0           | -27.2       | 1.94 V             | 183                  | 34.6             | 12.2                     |
| 2                                                    | 11910.00        | 37.8 AV                 | 54.0           | -16.2       | 1.94 V             | 183                  | 25.6             | 12.2                     |
| 3                                                    | 17865.00        | 55.0 PK                 | 74.0           | -19.0       | 1.71 V             | 103                  | 33.2             | 21.8                     |
| 4                                                    | 17865.00        | 44.1 AV                 | 54.0           | -9.9        | 1.71 V             | 103                  | 22.3             | 21.8                     |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 45 : 6175 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 50.1 PK                 | 74.0           | -23.9       | 3.00 H             | 114                  | 37.7             | 12.4                     |
| 2                                                    | 12350.00        | 39.1 AV                 | 54.0           | -14.9       | 3.00 H             | 114                  | 26.7             | 12.4                     |
| 3                                                    | 18525.00        | 54.0 PK                 | 74.0           | -20.0       | 1.48 H             | 215                  | 58.7             | -4.7                     |
| 4                                                    | 18525.00        | 43.6 AV                 | 54.0           | -10.4       | 1.48 H             | 215                  | 48.3             | -4.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.5 PK                 | 74.0           | -26.5       | 1.80 V             | 153                  | 35.1             | 12.4                     |
| 2                                                    | 12350.00        | 37.4 AV                 | 54.0           | -16.6       | 1.80 V             | 153                  | 25.0             | 12.4                     |
| 3                                                    | 18525.00        | 54.1 PK                 | 74.0           | -19.9       | 1.70 V             | 36                   | 58.8             | -4.7                     |
| 4                                                    | 18525.00        | 44.2 AV                 | 54.0           | -9.8        | 1.70 V             | 36                   | 48.9             | -4.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 93 : 6415 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 50.4 PK                 | 88.2           | -37.8       | 2.97 H             | 88                   | 37.3             | 13.1                     |
| 2                                                    | #12830.00       | 39.5 AV                 | 68.2           | -28.7       | 2.97 H             | 88                   | 26.4             | 13.1                     |
| 3                                                    | 19245.00        | 54.4 PK                 | 74.0           | -19.6       | 1.50 H             | 202                  | 58.4             | -4.0                     |
| 4                                                    | 19245.00        | 44.1 AV                 | 54.0           | -9.9        | 1.50 H             | 202                  | 48.1             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 46.9 PK                 | 88.2           | -41.3       | 1.83 V             | 160                  | 33.8             | 13.1                     |
| 2                                                    | #12830.00       | 37.1 AV                 | 68.2           | -31.1       | 1.83 V             | 160                  | 24.0             | 13.1                     |
| 3                                                    | 19245.00        | 54.3 PK                 | 74.0           | -19.7       | 1.68 V             | 37                   | 58.3             | -4.0                     |
| 4                                                    | 19245.00        | 44.6 AV                 | 54.0           | -9.4        | 1.68 V             | 37                   | 48.6             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 97 : 6435 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 49.9 PK                 | 88.2           | -38.3       | 2.92 H             | 106                  | 36.6             | 13.3                     |
| 2                                                    | #12870.00       | 39.2 AV                 | 68.2           | -29.0       | 2.92 H             | 106                  | 25.9             | 13.3                     |
| 3                                                    | 19305.00        | 54.3 PK                 | 74.0           | -19.7       | 1.42 H             | 210                  | 58.2             | -3.9                     |
| 4                                                    | 19305.00        | 43.9 AV                 | 54.0           | -10.1       | 1.42 H             | 210                  | 47.8             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 47.4 PK                 | 88.2           | -40.8       | 1.84 V             | 138                  | 34.1             | 13.3                     |
| 2                                                    | #12870.00       | 37.2 AV                 | 68.2           | -31.0       | 1.84 V             | 138                  | 23.9             | 13.3                     |
| 3                                                    | 19305.00        | 54.3 PK                 | 74.0           | -19.7       | 1.67 V             | 49                   | 58.2             | -3.9                     |
| 4                                                    | 19305.00        | 44.5 AV                 | 54.0           | -9.5        | 1.67 V             | 49                   | 48.4             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 105 : 6475 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12950.00       | 50.1 PK                 | 88.2           | -38.1       | 2.94 H             | 104                  | 36.8             | 13.3                     |
| 2                                                    | #12950.00       | 39.4 AV                 | 68.2           | -28.8       | 2.94 H             | 104                  | 26.1             | 13.3                     |
| 3                                                    | 19425.00        | 54.4 PK                 | 74.0           | -19.6       | 1.47 H             | 208                  | 57.9             | -3.5                     |
| 4                                                    | 19425.00        | 43.9 AV                 | 54.0           | -10.1       | 1.47 H             | 208                  | 47.4             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12950.00       | 47.3 PK                 | 88.2           | -40.9       | 1.80 V             | 160                  | 34.0             | 13.3                     |
| 2                                                    | #12950.00       | 37.4 AV                 | 68.2           | -30.8       | 1.80 V             | 160                  | 24.1             | 13.3                     |
| 3                                                    | 19425.00        | 54.2 PK                 | 74.0           | -19.8       | 1.71 V             | 21                   | 57.7             | -3.5                     |
| 4                                                    | 19425.00        | 44.5 AV                 | 54.0           | -9.5        | 1.71 V             | 21                   | 48.0             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 113 : 6515 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 50.3 PK                 | 88.2           | -37.9       | 2.96 H             | 112                  | 37.0             | 13.3                     |
| 2                                                    | #13030.00       | 39.7 AV                 | 68.2           | -28.5       | 2.96 H             | 112                  | 26.4             | 13.3                     |
| 3                                                    | 19545.00        | 54.0 PK                 | 74.0           | -20.0       | 1.49 H             | 231                  | 57.7             | -3.7                     |
| 4                                                    | 19545.00        | 43.8 AV                 | 54.0           | -10.2       | 1.49 H             | 231                  | 47.5             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 47.7 PK                 | 88.2           | -40.5       | 1.76 V             | 154                  | 34.4             | 13.3                     |
| 2                                                    | #13030.00       | 37.6 AV                 | 68.2           | -30.6       | 1.76 V             | 154                  | 24.3             | 13.3                     |
| 3                                                    | 19545.00        | 54.6 PK                 | 74.0           | -19.4       | 1.68 V             | 22                   | 58.3             | -3.7                     |
| 4                                                    | 19545.00        | 44.6 AV                 | 54.0           | -9.4        | 1.68 V             | 22                   | 48.3             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 117 : 6535 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 50.2 PK                 | 88.2           | -38.0       | 2.94 H             | 92                   | 36.9             | 13.3                     |
| 2                                                    | #13070.00       | 39.7 AV                 | 68.2           | -28.5       | 2.94 H             | 92                   | 26.4             | 13.3                     |
| 3                                                    | 19605.00        | 55.0 PK                 | 74.0           | -19.0       | 1.39 H             | 208                  | 59.0             | -4.0                     |
| 4                                                    | 19605.00        | 44.2 AV                 | 54.0           | -9.8        | 1.39 H             | 208                  | 48.2             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.3 PK                 | 88.2           | -40.9       | 1.79 V             | 163                  | 34.0             | 13.3                     |
| 2                                                    | #13070.00       | 37.3 AV                 | 68.2           | -30.9       | 1.79 V             | 163                  | 24.0             | 13.3                     |
| 3                                                    | 19605.00        | 54.0 PK                 | 74.0           | -20.0       | 1.67 V             | 49                   | 58.0             | -4.0                     |
| 4                                                    | 19605.00        | 43.9 AV                 | 54.0           | -10.1       | 1.67 V             | 49                   | 47.9             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 149 : 6695 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 51.0 PK                 | 74.0           | -23.0       | 2.90 H             | 101                  | 36.9             | 14.1                     |
| 2                                                    | 13390.00        | 39.9 AV                 | 54.0           | -14.1       | 2.90 H             | 101                  | 25.8             | 14.1                     |
| 3                                                    | 20085.00        | 53.5 PK                 | 74.0           | -20.5       | 1.44 H             | 223                  | 56.9             | -3.4                     |
| 4                                                    | 20085.00        | 43.3 AV                 | 54.0           | -10.7       | 1.44 H             | 223                  | 46.7             | -3.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 48.2 PK                 | 74.0           | -25.8       | 1.78 V             | 145                  | 34.1             | 14.1                     |
| 2                                                    | 13390.00        | 37.9 AV                 | 54.0           | -16.1       | 1.78 V             | 145                  | 23.8             | 14.1                     |
| 3                                                    | 20085.00        | 53.8 PK                 | 74.0           | -20.2       | 1.65 V             | 43                   | 57.2             | -3.4                     |
| 4                                                    | 20085.00        | 43.9 AV                 | 54.0           | -10.1       | 1.65 V             | 43                   | 47.3             | -3.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 181 : 6855 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 50.5 PK                 | 88.2           | -37.7       | 3.00 H             | 84                   | 35.3             | 15.2                     |
| 2                                                    | #13710.00       | 39.7 AV                 | 68.2           | -28.5       | 3.00 H             | 84                   | 24.5             | 15.2                     |
| 3                                                    | 20565.00        | 54.4 PK                 | 74.0           | -19.6       | 1.46 H             | 214                  | 57.6             | -3.2                     |
| 4                                                    | 20565.00        | 44.2 AV                 | 54.0           | -9.8        | 1.46 H             | 214                  | 47.4             | -3.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.9 PK                 | 88.2           | -40.3       | 1.77 V             | 158                  | 32.7             | 15.2                     |
| 2                                                    | #13710.00       | 37.7 AV                 | 68.2           | -30.5       | 1.77 V             | 158                  | 22.5             | 15.2                     |
| 3                                                    | 20565.00        | 53.7 PK                 | 74.0           | -20.3       | 1.74 V             | 33                   | 56.9             | -3.2                     |
| 4                                                    | 20565.00        | 44.1 AV                 | 54.0           | -9.9        | 1.74 V             | 33                   | 47.3             | -3.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 185 : 6875 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 50.2 PK                 | 88.2           | -38.0       | 2.95 H             | 110                  | 35.0             | 15.2                     |
| 2                                                    | #13750.00       | 39.3 AV                 | 68.2           | -28.9       | 2.95 H             | 110                  | 24.1             | 15.2                     |
| 3                                                    | 20625.00        | 54.3 PK                 | 74.0           | -19.7       | 1.50 H             | 219                  | 57.6             | -3.3                     |
| 4                                                    | 20625.00        | 43.9 AV                 | 54.0           | -10.1       | 1.50 H             | 219                  | 47.2             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 47.8 PK                 | 88.2           | -40.4       | 1.75 V             | 147                  | 32.6             | 15.2                     |
| 2                                                    | #13750.00       | 37.6 AV                 | 68.2           | -30.6       | 1.75 V             | 147                  | 22.4             | 15.2                     |
| 3                                                    | 20625.00        | 53.9 PK                 | 74.0           | -20.1       | 1.65 V             | 46                   | 57.2             | -3.3                     |
| 4                                                    | 20625.00        | 43.9 AV                 | 54.0           | -10.1       | 1.65 V             | 46                   | 47.2             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 209 : 6995 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 49.8 PK                 | 88.2           | -38.4       | 2.93 H             | 114                  | 34.4             | 15.4                     |
| 2                                                    | #13990.00       | 39.2 AV                 | 68.2           | -29.0       | 2.93 H             | 114                  | 23.8             | 15.4                     |
| 3                                                    | 20985.00        | 54.1 PK                 | 74.0           | -19.9       | 1.43 H             | 211                  | 56.8             | -2.7                     |
| 4                                                    | 20985.00        | 43.4 AV                 | 54.0           | -10.6       | 1.43 H             | 211                  | 46.1             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 47.3 PK                 | 88.2           | -40.9       | 1.84 V             | 162                  | 31.9             | 15.4                     |
| 2                                                    | #13990.00       | 37.5 AV                 | 68.2           | -30.7       | 1.84 V             | 162                  | 22.1             | 15.4                     |
| 3                                                    | 20985.00        | 54.1 PK                 | 74.0           | -19.9       | 1.73 V             | 40                   | 56.8             | -2.7                     |
| 4                                                    | 20985.00        | 44.4 AV                 | 54.0           | -9.6        | 1.73 V             | 40                   | 47.1             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 233 : 7115 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 49.9 PK                 | 88.2           | -38.3       | 2.93 H             | 110                  | 34.6             | 15.3                     |
| 2                                                    | #14230.00       | 39.3 AV                 | 68.2           | -28.9       | 2.93 H             | 110                  | 24.0             | 15.3                     |
| 3                                                    | 21345.00        | 54.6 PK                 | 74.0           | -19.4       | 1.43 H             | 205                  | 56.8             | -2.2                     |
| 4                                                    | 21345.00        | 44.0 AV                 | 54.0           | -10.0       | 1.43 H             | 205                  | 46.2             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 47.4 PK                 | 88.2           | -40.8       | 1.77 V             | 143                  | 32.1             | 15.3                     |
| 2                                                    | #14230.00       | 37.2 AV                 | 68.2           | -31.0       | 1.77 V             | 143                  | 21.9             | 15.3                     |
| 3                                                    | 21345.00        | 53.9 PK                 | 74.0           | -20.1       | 1.67 V             | 40                   | 56.1             | -2.2                     |
| 4                                                    | 21345.00        | 44.3 AV                 | 54.0           | -9.7        | 1.67 V             | 40                   | 46.5             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 3 : 5965 MHz                                                       |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11930.00        | 49.7 PK                 | 74.0           | -24.3       | 2.99 H             | 107                  | 37.5             | 12.2                     |
| 2                                                    | 11930.00        | 39.2 AV                 | 54.0           | -14.8       | 2.99 H             | 107                  | 27.0             | 12.2                     |
| 3                                                    | 17895.00        | 54.3 PK                 | 74.0           | -19.7       | 1.42 H             | 217                  | 32.0             | 22.3                     |
| 4                                                    | 17895.00        | 43.6 AV                 | 54.0           | -10.4       | 1.42 H             | 217                  | 21.3             | 22.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11930.00        | 48.8 PK                 | 74.0           | -25.2       | 1.91 V             | 209                  | 36.6             | 12.2                     |
| 2                                                    | 11930.00        | 38.0 AV                 | 54.0           | -16.0       | 1.91 V             | 209                  | 25.8             | 12.2                     |
| 3                                                    | 17895.00        | 54.6 PK                 | 74.0           | -19.4       | 1.65 V             | 118                  | 32.3             | 22.3                     |
| 4                                                    | 17895.00        | 42.1 AV                 | 54.0           | -11.9       | 1.65 V             | 118                  | 19.8             | 22.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 43 : 6165 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12330.00        | 50.2 PK                 | 74.0           | -23.8       | 2.89 H             | 109                  | 37.8             | 12.4                     |
| 2                                                    | 12330.00        | 39.4 AV                 | 54.0           | -14.6       | 2.89 H             | 109                  | 27.0             | 12.4                     |
| 3                                                    | 18495.00        | 54.2 PK                 | 74.0           | -19.8       | 1.42 H             | 232                  | 58.9             | -4.7                     |
| 4                                                    | 18495.00        | 43.5 AV                 | 54.0           | -10.5       | 1.42 H             | 232                  | 48.2             | -4.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12330.00        | 48.3 PK                 | 74.0           | -25.7       | 1.90 V             | 198                  | 35.9             | 12.4                     |
| 2                                                    | 12330.00        | 37.6 AV                 | 54.0           | -16.4       | 1.90 V             | 198                  | 25.2             | 12.4                     |
| 3                                                    | 18495.00        | 55.0 PK                 | 74.0           | -19.0       | 1.63 V             | 116                  | 59.7             | -4.7                     |
| 4                                                    | 18495.00        | 42.3 AV                 | 54.0           | -11.7       | 1.63 V             | 116                  | 47.0             | -4.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 91 : 6405 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12810.00       | 49.7 PK                 | 88.2           | -38.5       | 2.96 H             | 95                   | 36.6             | 13.1                     |
| 2                                                    | #12810.00       | 39.1 AV                 | 68.2           | -29.1       | 2.96 H             | 95                   | 26.0             | 13.1                     |
| 3                                                    | 19215.00        | 54.7 PK                 | 74.0           | -19.3       | 1.38 H             | 225                  | 58.9             | -4.2                     |
| 4                                                    | 19215.00        | 44.1 AV                 | 54.0           | -9.9        | 1.38 H             | 225                  | 48.3             | -4.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12810.00       | 48.7 PK                 | 88.2           | -39.5       | 1.87 V             | 217                  | 35.6             | 13.1                     |
| 2                                                    | #12810.00       | 38.2 AV                 | 68.2           | -30.0       | 1.87 V             | 217                  | 25.1             | 13.1                     |
| 3                                                    | 19215.00        | 54.8 PK                 | 74.0           | -19.2       | 1.61 V             | 127                  | 59.0             | -4.2                     |
| 4                                                    | 19215.00        | 42.1 AV                 | 54.0           | -11.9       | 1.61 V             | 127                  | 46.3             | -4.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 99 : 6445 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12890.00       | 50.3 PK                 | 88.2           | -37.9       | 2.91 H             | 100                  | 36.9             | 13.4                     |
| 2                                                    | #12890.00       | 39.5 AV                 | 68.2           | -28.7       | 2.91 H             | 100                  | 26.1             | 13.4                     |
| 3                                                    | 19335.00        | 54.1 PK                 | 74.0           | -19.9       | 1.46 H             | 217                  | 57.8             | -3.7                     |
| 4                                                    | 19335.00        | 43.6 AV                 | 54.0           | -10.4       | 1.46 H             | 217                  | 47.3             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12890.00       | 48.8 PK                 | 88.2           | -39.4       | 1.90 V             | 224                  | 35.4             | 13.4                     |
| 2                                                    | #12890.00       | 38.2 AV                 | 68.2           | -30.0       | 1.90 V             | 224                  | 24.8             | 13.4                     |
| 3                                                    | 19335.00        | 54.6 PK                 | 74.0           | -19.4       | 1.59 V             | 109                  | 58.3             | -3.7                     |
| 4                                                    | 19335.00        | 42.0 AV                 | 54.0           | -12.0       | 1.59 V             | 109                  | 45.7             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 107 : 6485 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12970.00       | 49.9 PK                 | 88.2           | -38.3       | 2.94 H             | 109                  | 36.6             | 13.3                     |
| 2                                                    | #12970.00       | 39.4 AV                 | 68.2           | -28.8       | 2.94 H             | 109                  | 26.1             | 13.3                     |
| 3                                                    | 19455.00        | 54.1 PK                 | 74.0           | -19.9       | 1.40 H             | 220                  | 57.5             | -3.4                     |
| 4                                                    | 19455.00        | 43.8 AV                 | 54.0           | -10.2       | 1.40 H             | 220                  | 47.2             | -3.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12970.00       | 48.8 PK                 | 88.2           | -39.4       | 1.95 V             | 201                  | 35.5             | 13.3                     |
| 2                                                    | #12970.00       | 38.2 AV                 | 68.2           | -30.0       | 1.95 V             | 201                  | 24.9             | 13.3                     |
| 3                                                    | 19455.00        | 54.2 PK                 | 74.0           | -19.8       | 1.63 V             | 107                  | 57.6             | -3.4                     |
| 4                                                    | 19455.00        | 41.9 AV                 | 54.0           | -12.1       | 1.63 V             | 107                  | 45.3             | -3.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 115 : 6525 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13050.00       | 50.6 PK                 | 88.2           | -37.6       | 2.94 H             | 95                   | 37.3             | 13.3                     |
| 2                                                    | #13050.00       | 39.9 AV                 | 68.2           | -28.3       | 2.94 H             | 95                   | 26.6             | 13.3                     |
| 3                                                    | 19575.00        | 54.0 PK                 | 74.0           | -20.0       | 1.48 H             | 214                  | 57.8             | -3.8                     |
| 4                                                    | 19575.00        | 43.5 AV                 | 54.0           | -10.5       | 1.48 H             | 214                  | 47.3             | -3.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13050.00       | 48.7 PK                 | 88.2           | -39.5       | 1.92 V             | 217                  | 35.4             | 13.3                     |
| 2                                                    | #13050.00       | 37.9 AV                 | 68.2           | -30.3       | 1.92 V             | 217                  | 24.6             | 13.3                     |
| 3                                                    | 19575.00        | 54.5 PK                 | 74.0           | -19.5       | 1.69 V             | 121                  | 58.3             | -3.8                     |
| 4                                                    | 19575.00        | 41.8 AV                 | 54.0           | -12.2       | 1.69 V             | 121                  | 45.6             | -3.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 123 : 6565 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13130.00       | 48.6 PK                 | 88.2           | -39.6       | 2.98 H             | 66                   | 35.2             | 13.4                     |
| 2                                                    | #13130.00       | 37.5 AV                 | 68.2           | -30.7       | 2.98 H             | 66                   | 24.1             | 13.4                     |
| 3                                                    | 19695.00        | 53.0 PK                 | 74.0           | -21.0       | 1.56 H             | 217                  | 57.0             | -4.0                     |
| 4                                                    | 19695.00        | 42.4 AV                 | 54.0           | -11.6       | 1.56 H             | 217                  | 46.4             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13130.00       | 49.4 PK                 | 88.2           | -38.8       | 1.96 V             | 203                  | 36.0             | 13.4                     |
| 2                                                    | #13130.00       | 38.4 AV                 | 68.2           | -29.8       | 1.96 V             | 203                  | 25.0             | 13.4                     |
| 3                                                    | 19695.00        | 54.3 PK                 | 74.0           | -19.7       | 1.61 V             | 125                  | 58.3             | -4.0                     |
| 4                                                    | 19695.00        | 41.8 AV                 | 54.0           | -12.2       | 1.61 V             | 125                  | 45.8             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                      |                  |                               |                                                                       |
|----------------------|------------------|-------------------------------|-----------------------------------------------------------------------|
| RF Mode              | 802.11be (EHT40) | Channel                       | CH 155 : 6725 MHz                                                     |
| Frequency Range      | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions      | 24 °C, 72 % RH                                                        |
| Tested By            | Willy Lin        |                               |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13450.00       | 48.6 PK                 | 88.2           | -39.6       | 2.98 H             | 66                   | 34.2             | 14.4                     |
| 2                                                    | #13450.00       | 37.6 AV                 | 68.2           | -30.6       | 2.98 H             | 66                   | 23.2             | 14.4                     |
| 3                                                    | 20175.00        | 52.8 PK                 | 74.0           | -21.2       | 1.56 H             | 216                  | 56.0             | -3.2                     |
| 4                                                    | 20175.00        | 42.2 AV                 | 54.0           | -11.8       | 1.56 H             | 216                  | 45.4             | -3.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13450.00       | 48.8 PK                 | 88.2           | -39.4       | 1.94 V             | 206                  | 34.4             | 14.4                     |
| 2                                                    | #13450.00       | 38.3 AV                 | 68.2           | -29.9       | 1.94 V             | 206                  | 23.9             | 14.4                     |
| 3                                                    | 20175.00        | 54.5 PK                 | 74.0           | -19.5       | 1.68 V             | 115                  | 57.7             | -3.2                     |
| 4                                                    | 20175.00        | 41.8 AV                 | 54.0           | -12.2       | 1.68 V             | 115                  | 45.0             | -3.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 179 : 6845 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13690.00       | 48.6 PK                 | 88.2           | -39.6       | 3.00 H             | 50                   | 33.3             | 15.3                     |
| 2                                                    | #13690.00       | 37.2 AV                 | 68.2           | -31.0       | 3.00 H             | 50                   | 21.9             | 15.3                     |
| 3                                                    | 20535.00        | 53.6 PK                 | 74.0           | -20.4       | 1.56 H             | 218                  | 56.8             | -3.2                     |
| 4                                                    | 20535.00        | 42.8 AV                 | 54.0           | -11.2       | 1.56 H             | 218                  | 46.0             | -3.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13690.00       | 49.2 PK                 | 88.2           | -39.0       | 1.96 V             | 215                  | 33.9             | 15.3                     |
| 2                                                    | #13690.00       | 38.3 AV                 | 68.2           | -29.9       | 1.96 V             | 215                  | 23.0             | 15.3                     |
| 3                                                    | 20535.00        | 54.6 PK                 | 74.0           | -19.4       | 1.61 V             | 111                  | 57.8             | -3.2                     |
| 4                                                    | 20535.00        | 42.2 AV                 | 54.0           | -11.8       | 1.61 V             | 111                  | 45.4             | -3.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 187 : 6885 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13770.00       | 48.3 PK                 | 88.2           | -39.9       | 2.96 H             | 68                   | 33.2             | 15.1                     |
| 2                                                    | #13770.00       | 37.1 AV                 | 68.2           | -31.1       | 2.96 H             | 68                   | 22.0             | 15.1                     |
| 3                                                    | 20655.00        | 52.5 PK                 | 74.0           | -21.5       | 1.56 H             | 207                  | 55.7             | -3.2                     |
| 4                                                    | 20655.00        | 42.2 AV                 | 54.0           | -11.8       | 1.56 H             | 207                  | 45.4             | -3.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13770.00       | 48.6 PK                 | 88.2           | -39.6       | 1.85 V             | 211                  | 33.5             | 15.1                     |
| 2                                                    | #13770.00       | 38.0 AV                 | 68.2           | -30.2       | 1.85 V             | 211                  | 22.9             | 15.1                     |
| 3                                                    | 20655.00        | 54.7 PK                 | 74.0           | -19.3       | 1.62 V             | 125                  | 57.9             | -3.2                     |
| 4                                                    | 20655.00        | 42.1 AV                 | 54.0           | -11.9       | 1.62 V             | 125                  | 45.3             | -3.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 211 : 7005 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14010.00       | 48.5 PK                 | 88.2           | -39.7       | 2.94 H             | 81                   | 33.0             | 15.5                     |
| 2                                                    | #14010.00       | 37.4 AV                 | 68.2           | -30.8       | 2.94 H             | 81                   | 21.9             | 15.5                     |
| 3                                                    | 21015.00        | 53.2 PK                 | 74.0           | -20.8       | 1.50 H             | 203                  | 55.9             | -2.7                     |
| 4                                                    | 21015.00        | 42.7 AV                 | 54.0           | -11.3       | 1.50 H             | 203                  | 45.4             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14010.00       | 48.7 PK                 | 88.2           | -39.5       | 1.92 V             | 208                  | 33.2             | 15.5                     |
| 2                                                    | #14010.00       | 38.0 AV                 | 68.2           | -30.2       | 1.92 V             | 208                  | 22.5             | 15.5                     |
| 3                                                    | 21015.00        | 54.9 PK                 | 74.0           | -19.1       | 1.62 V             | 131                  | 57.6             | -2.7                     |
| 4                                                    | 21015.00        | 42.6 AV                 | 54.0           | -11.4       | 1.62 V             | 131                  | 45.3             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                       |
|-----------------------------|------------------|------------------------------------------|-----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 227 : 7085 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=510 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                        |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                       |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14170.00       | 48.7 PK                 | 88.2           | -39.5       | 2.94 H             | 70                   | 33.5             | 15.2                     |
| 2                                                    | #14170.00       | 37.8 AV                 | 68.2           | -30.4       | 2.94 H             | 70                   | 22.6             | 15.2                     |
| 3                                                    | 21255.00        | 53.0 PK                 | 74.0           | -21.0       | 1.55 H             | 230                  | 55.4             | -2.4                     |
| 4                                                    | 21255.00        | 42.3 AV                 | 54.0           | -11.7       | 1.55 H             | 230                  | 44.7             | -2.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14170.00       | 48.8 PK                 | 88.2           | -39.4       | 1.95 V             | 204                  | 33.6             | 15.2                     |
| 2                                                    | #14170.00       | 37.9 AV                 | 68.2           | -30.3       | 1.95 V             | 204                  | 22.7             | 15.2                     |
| 3                                                    | 21255.00        | 54.9 PK                 | 74.0           | -19.1       | 1.65 V             | 133                  | 57.3             | -2.4                     |
| 4                                                    | 21255.00        | 42.5 AV                 | 54.0           | -11.5       | 1.65 V             | 133                  | 44.9             | -2.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 7 : 5985 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 47.8 PK                 | 74.0           | -26.2       | 2.98 H             | 109                  | 35.6             | 12.2                     |
| 2                                                    | 11970.00        | 37.2 AV                 | 54.0           | -16.8       | 2.98 H             | 109                  | 25.0             | 12.2                     |
| 3                                                    | 17955.00        | 53.8 PK                 | 74.0           | -20.2       | 1.70 H             | 210                  | 30.6             | 23.2                     |
| 4                                                    | 17955.00        | 42.5 AV                 | 54.0           | -11.5       | 1.70 H             | 210                  | 19.3             | 23.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 49.0 PK                 | 74.0           | -25.0       | 1.90 V             | 205                  | 36.8             | 12.2                     |
| 2                                                    | 11970.00        | 38.1 AV                 | 54.0           | -15.9       | 1.90 V             | 205                  | 25.9             | 12.2                     |
| 3                                                    | 17955.00        | 54.7 PK                 | 74.0           | -19.3       | 1.68 V             | 128                  | 31.5             | 23.2                     |
| 4                                                    | 17955.00        | 42.0 AV                 | 54.0           | -12.0       | 1.68 V             | 128                  | 18.8             | 23.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 39 : 6145 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12290.00        | 47.9 PK                 | 74.0           | -26.1       | 2.96 H             | 99                   | 35.4             | 12.5                     |
| 2                                                    | 12290.00        | 37.5 AV                 | 54.0           | -16.5       | 2.96 H             | 99                   | 25.0             | 12.5                     |
| 3                                                    | 18435.00        | 54.0 PK                 | 74.0           | -20.0       | 1.74 H             | 226                  | 58.9             | -4.9                     |
| 4                                                    | 18435.00        | 42.6 AV                 | 54.0           | -11.4       | 1.74 H             | 226                  | 47.5             | -4.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12290.00        | 48.4 PK                 | 74.0           | -25.6       | 1.85 V             | 224                  | 35.9             | 12.5                     |
| 2                                                    | 12290.00        | 37.6 AV                 | 54.0           | -16.4       | 1.85 V             | 224                  | 25.1             | 12.5                     |
| 3                                                    | 18435.00        | 54.1 PK                 | 74.0           | -19.9       | 1.63 V             | 107                  | 59.0             | -4.9                     |
| 4                                                    | 18435.00        | 41.8 AV                 | 54.0           | -12.2       | 1.63 V             | 107                  | 46.7             | -4.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 87 : 6385 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12770.00       | 48.6 PK                 | 88.2           | -39.6       | 3.01 H             | 121                  | 35.5             | 13.1                     |
| 2                                                    | #12770.00       | 37.7 AV                 | 68.2           | -30.5       | 3.01 H             | 121                  | 24.6             | 13.1                     |
| 3                                                    | 19155.00        | 53.7 PK                 | 74.0           | -20.3       | 1.71 H             | 196                  | 57.9             | -4.2                     |
| 4                                                    | 19155.00        | 42.3 AV                 | 54.0           | -11.7       | 1.71 H             | 196                  | 46.5             | -4.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12770.00       | 48.5 PK                 | 88.2           | -39.7       | 1.87 V             | 204                  | 35.4             | 13.1                     |
| 2                                                    | #12770.00       | 37.6 AV                 | 68.2           | -30.6       | 1.87 V             | 204                  | 24.5             | 13.1                     |
| 3                                                    | 19155.00        | 54.3 PK                 | 74.0           | -19.7       | 1.59 V             | 108                  | 58.5             | -4.2                     |
| 4                                                    | 19155.00        | 41.7 AV                 | 54.0           | -12.3       | 1.59 V             | 108                  | 45.9             | -4.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                      |                  |                               |                                                                      |
|----------------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode              | 802.11be (EHT80) | Channel                       | CH 103 : 6465 MHz                                                    |
| Frequency Range      | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions      | 24 °C, 72 % RH                                                       |
| Tested By            | Willy Lin        |                               |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12930.00       | 47.5 PK                 | 88.2           | -40.7       | 2.95 H             | 105                  | 34.1             | 13.4                     |
| 2                                                    | #12930.00       | 37.1 AV                 | 68.2           | -31.1       | 2.95 H             | 105                  | 23.7             | 13.4                     |
| 3                                                    | 19395.00        | 53.5 PK                 | 74.0           | -20.5       | 1.68 H             | 211                  | 57.0             | -3.5                     |
| 4                                                    | 19395.00        | 42.2 AV                 | 54.0           | -11.8       | 1.68 H             | 211                  | 45.7             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12930.00       | 49.2 PK                 | 88.2           | -39.0       | 1.88 V             | 213                  | 35.8             | 13.4                     |
| 2                                                    | #12930.00       | 38.3 AV                 | 68.2           | -29.9       | 1.88 V             | 213                  | 24.9             | 13.4                     |
| 3                                                    | 19395.00        | 55.3 PK                 | 74.0           | -18.7       | 1.68 V             | 109                  | 58.8             | -3.5                     |
| 4                                                    | 19395.00        | 42.5 AV                 | 54.0           | -11.5       | 1.68 V             | 109                  | 46.0             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 119 : 6545 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13090.00       | 48.2 PK                 | 88.2           | -40.0       | 3.02 H             | 113                  | 34.7             | 13.5                     |
| 2                                                    | #13090.00       | 37.3 AV                 | 68.2           | -30.9       | 3.02 H             | 113                  | 23.8             | 13.5                     |
| 3                                                    | 19635.00        | 54.0 PK                 | 74.0           | -20.0       | 1.74 H             | 220                  | 58.0             | -4.0                     |
| 4                                                    | 19635.00        | 42.9 AV                 | 54.0           | -11.1       | 1.74 H             | 220                  | 46.9             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13090.00       | 48.9 PK                 | 88.2           | -39.3       | 1.89 V             | 205                  | 35.4             | 13.5                     |
| 2                                                    | #13090.00       | 38.2 AV                 | 68.2           | -30.0       | 1.89 V             | 205                  | 24.7             | 13.5                     |
| 3                                                    | 19635.00        | 55.0 PK                 | 74.0           | -19.0       | 1.61 V             | 120                  | 59.0             | -4.0                     |
| 4                                                    | 19635.00        | 42.3 AV                 | 54.0           | -11.7       | 1.61 V             | 120                  | 46.3             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                      |                  |                               |                                                                      |
|----------------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode              | 802.11be (EHT80) | Channel                       | CH 151 : 6705 MHz                                                    |
| Frequency Range      | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions      | 24 °C, 72 % RH                                                       |
| Tested By            | Willy Lin        |                               |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13410.00       | 47.9 PK                 | 88.2           | -40.3       | 2.98 H             | 107                  | 33.7             | 14.2                     |
| 2                                                    | #13410.00       | 37.1 AV                 | 68.2           | -31.1       | 2.98 H             | 107                  | 22.9             | 14.2                     |
| 3                                                    | 20115.00        | 54.0 PK                 | 74.0           | -20.0       | 1.66 H             | 211                  | 57.2             | -3.2                     |
| 4                                                    | 20115.00        | 42.6 AV                 | 54.0           | -11.4       | 1.66 H             | 211                  | 45.8             | -3.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13410.00       | 48.8 PK                 | 88.2           | -39.4       | 1.87 V             | 218                  | 34.6             | 14.2                     |
| 2                                                    | #13410.00       | 38.0 AV                 | 68.2           | -30.2       | 1.87 V             | 218                  | 23.8             | 14.2                     |
| 3                                                    | 20115.00        | 54.9 PK                 | 74.0           | -19.1       | 1.68 V             | 125                  | 58.1             | -3.2                     |
| 4                                                    | 20115.00        | 42.6 AV                 | 54.0           | -11.4       | 1.68 V             | 125                  | 45.8             | -3.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 183 : 6865 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13730.00       | 47.3 PK                 | 88.2           | -40.9       | 3.00 H             | 110                  | 32.2             | 15.1                     |
| 2                                                    | #13730.00       | 36.7 AV                 | 68.2           | -31.5       | 3.00 H             | 110                  | 21.6             | 15.1                     |
| 3                                                    | 20595.00        | 53.7 PK                 | 74.0           | -20.3       | 1.72 H             | 205                  | 57.1             | -3.4                     |
| 4                                                    | 20595.00        | 42.5 AV                 | 54.0           | -11.5       | 1.72 H             | 205                  | 45.9             | -3.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13730.00       | 48.8 PK                 | 88.2           | -39.4       | 1.87 V             | 196                  | 33.7             | 15.1                     |
| 2                                                    | #13730.00       | 37.8 AV                 | 68.2           | -30.4       | 1.87 V             | 196                  | 22.7             | 15.1                     |
| 3                                                    | 20595.00        | 54.5 PK                 | 74.0           | -19.5       | 1.61 V             | 109                  | 57.9             | -3.4                     |
| 4                                                    | 20595.00        | 42.2 AV                 | 54.0           | -11.8       | 1.61 V             | 109                  | 45.6             | -3.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 199 : 6945 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13890.00       | 47.5 PK                 | 88.2           | -40.7       | 2.94 H             | 119                  | 32.6             | 14.9                     |
| 2                                                    | #13890.00       | 36.9 AV                 | 68.2           | -31.3       | 2.94 H             | 119                  | 22.0             | 14.9                     |
| 3                                                    | 20835.00        | 54.0 PK                 | 74.0           | -20.0       | 1.72 H             | 214                  | 56.7             | -2.7                     |
| 4                                                    | 20835.00        | 42.6 AV                 | 54.0           | -11.4       | 1.72 H             | 214                  | 45.3             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13890.00       | 48.5 PK                 | 88.2           | -39.7       | 1.86 V             | 195                  | 33.6             | 14.9                     |
| 2                                                    | #13890.00       | 37.5 AV                 | 68.2           | -30.7       | 1.86 V             | 195                  | 22.6             | 14.9                     |
| 3                                                    | 20835.00        | 55.0 PK                 | 74.0           | -19.0       | 1.61 V             | 128                  | 57.7             | -2.7                     |
| 4                                                    | 20835.00        | 42.3 AV                 | 54.0           | -11.7       | 1.61 V             | 128                  | 45.0             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 215 : 7025 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14050.00       | 47.6 PK                 | 88.2           | -40.6       | 2.97 H             | 109                  | 32.2             | 15.4                     |
| 2                                                    | #14050.00       | 37.0 AV                 | 68.2           | -31.2       | 2.97 H             | 109                  | 21.6             | 15.4                     |
| 3                                                    | 21075.00        | 53.9 PK                 | 74.0           | -20.1       | 1.64 H             | 219                  | 56.6             | -2.7                     |
| 4                                                    | 21075.00        | 42.3 AV                 | 54.0           | -11.7       | 1.64 H             | 219                  | 45.0             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14050.00       | 48.7 PK                 | 88.2           | -39.5       | 1.94 V             | 200                  | 33.3             | 15.4                     |
| 2                                                    | #14050.00       | 38.1 AV                 | 68.2           | -30.1       | 1.94 V             | 200                  | 22.7             | 15.4                     |
| 3                                                    | 21075.00        | 54.2 PK                 | 74.0           | -19.8       | 1.63 V             | 120                  | 56.9             | -2.7                     |
| 4                                                    | 21075.00        | 41.9 AV                 | 54.0           | -12.1       | 1.63 V             | 120                  | 44.6             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 15 : 6025 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 47.7 PK                 | 74.0           | -26.3       | 3.04 H             | 113                  | 35.2             | 12.5                     |
| 2                                                    | 12050.00        | 37.0 AV                 | 54.0           | -17.0       | 3.04 H             | 113                  | 24.5             | 12.5                     |
| 3                                                    | 18075.00        | 53.6 PK                 | 74.0           | -20.4       | 1.71 H             | 219                  | 58.1             | -4.5                     |
| 4                                                    | 18075.00        | 42.1 AV                 | 54.0           | -11.9       | 1.71 H             | 219                  | 46.6             | -4.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 48.9 PK                 | 74.0           | -25.1       | 1.92 V             | 209                  | 36.4             | 12.5                     |
| 2                                                    | 12050.00        | 38.1 AV                 | 54.0           | -15.9       | 1.92 V             | 209                  | 25.6             | 12.5                     |
| 3                                                    | 18075.00        | 54.1 PK                 | 74.0           | -19.9       | 1.69 V             | 114                  | 58.6             | -4.5                     |
| 4                                                    | 18075.00        | 41.9 AV                 | 54.0           | -12.1       | 1.69 V             | 114                  | 46.4             | -4.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 47 : 6185 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12370.00        | 48.2 PK                 | 74.0           | -25.8       | 2.97 H             | 121                  | 35.8             | 12.4                     |
| 2                                                    | 12370.00        | 37.6 AV                 | 54.0           | -16.4       | 2.97 H             | 121                  | 25.2             | 12.4                     |
| 3                                                    | 18555.00        | 53.1 PK                 | 74.0           | -20.9       | 1.73 H             | 207                  | 57.6             | -4.5                     |
| 4                                                    | 18555.00        | 42.0 AV                 | 54.0           | -12.0       | 1.73 H             | 207                  | 46.5             | -4.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12370.00        | 48.1 PK                 | 74.0           | -25.9       | 1.88 V             | 212                  | 35.7             | 12.4                     |
| 2                                                    | 12370.00        | 37.6 AV                 | 54.0           | -16.4       | 1.88 V             | 212                  | 25.2             | 12.4                     |
| 3                                                    | 18555.00        | 54.8 PK                 | 74.0           | -19.2       | 1.63 V             | 131                  | 59.3             | -4.5                     |
| 4                                                    | 18555.00        | 42.3 AV                 | 54.0           | -11.7       | 1.63 V             | 131                  | 46.8             | -4.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 79 : 6345 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 48.0 PK                 | 74.0           | -26.0       | 2.98 H             | 101                  | 35.0             | 13.0                     |
| 2                                                    | 12690.00        | 37.3 AV                 | 54.0           | -16.7       | 2.98 H             | 101                  | 24.3             | 13.0                     |
| 3                                                    | 19035.00        | 53.9 PK                 | 74.0           | -20.1       | 1.69 H             | 198                  | 58.0             | -4.1                     |
| 4                                                    | 19035.00        | 42.8 AV                 | 54.0           | -11.2       | 1.69 H             | 198                  | 46.9             | -4.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 48.5 PK                 | 74.0           | -25.5       | 1.90 V             | 207                  | 35.5             | 13.0                     |
| 2                                                    | 12690.00        | 37.9 AV                 | 54.0           | -16.1       | 1.90 V             | 207                  | 24.9             | 13.0                     |
| 3                                                    | 19035.00        | 54.3 PK                 | 74.0           | -19.7       | 1.65 V             | 127                  | 58.4             | -4.1                     |
| 4                                                    | 19035.00        | 41.6 AV                 | 54.0           | -12.4       | 1.65 V             | 127                  | 45.7             | -4.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 111 : 6505 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13010.00       | 47.5 PK                 | 88.2           | -40.7       | 2.93 H             | 118                  | 34.3             | 13.2                     |
| 2                                                    | #13010.00       | 37.0 AV                 | 68.2           | -31.2       | 2.93 H             | 118                  | 23.8             | 13.2                     |
| 3                                                    | 19515.00        | 54.0 PK                 | 74.0           | -20.0       | 1.74 H             | 201                  | 57.5             | -3.5                     |
| 4                                                    | 19515.00        | 42.9 AV                 | 54.0           | -11.1       | 1.74 H             | 201                  | 46.4             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13010.00       | 48.8 PK                 | 88.2           | -39.4       | 1.94 V             | 204                  | 35.6             | 13.2                     |
| 2                                                    | #13010.00       | 37.8 AV                 | 68.2           | -30.4       | 1.94 V             | 204                  | 24.6             | 13.2                     |
| 3                                                    | 19515.00        | 54.6 PK                 | 74.0           | -19.4       | 1.62 V             | 105                  | 58.1             | -3.5                     |
| 4                                                    | 19515.00        | 42.0 AV                 | 54.0           | -12.0       | 1.62 V             | 105                  | 45.5             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 143 : 6665 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 47.9 PK                 | 74.0           | -26.1       | 2.97 H             | 122                  | 34.1             | 13.8                     |
| 2                                                    | 13330.00        | 37.2 AV                 | 54.0           | -16.8       | 2.97 H             | 122                  | 23.4             | 13.8                     |
| 3                                                    | 19995.00        | 53.5 PK                 | 74.0           | -20.5       | 1.75 H             | 211                  | 57.3             | -3.8                     |
| 4                                                    | 19995.00        | 42.5 AV                 | 54.0           | -11.5       | 1.75 H             | 211                  | 46.3             | -3.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 48.6 PK                 | 74.0           | -25.4       | 1.95 V             | 202                  | 34.8             | 13.8                     |
| 2                                                    | 13330.00        | 37.9 AV                 | 54.0           | -16.1       | 1.95 V             | 202                  | 24.1             | 13.8                     |
| 3                                                    | 19995.00        | 55.0 PK                 | 74.0           | -19.0       | 1.66 V             | 106                  | 58.8             | -3.8                     |
| 4                                                    | 19995.00        | 42.3 AV                 | 54.0           | -11.7       | 1.66 V             | 106                  | 46.1             | -3.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 175 : 6825 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 24 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13650.00       | 48.2 PK                 | 88.2           | -40.0       | 2.95 H             | 119                  | 33.1             | 15.1                     |
| 2                                                    | #13650.00       | 37.5 AV                 | 68.2           | -30.7       | 2.95 H             | 119                  | 22.4             | 15.1                     |
| 3                                                    | 20475.00        | 53.5 PK                 | 74.0           | -20.5       | 1.67 H             | 220                  | 56.4             | -2.9                     |
| 4                                                    | 20475.00        | 42.4 AV                 | 54.0           | -11.6       | 1.67 H             | 220                  | 45.3             | -2.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13650.00       | 48.7 PK                 | 88.2           | -39.5       | 1.91 V             | 197                  | 33.6             | 15.1                     |
| 2                                                    | #13650.00       | 38.1 AV                 | 68.2           | -30.1       | 1.91 V             | 197                  | 23.0             | 15.1                     |
| 3                                                    | 20475.00        | 54.6 PK                 | 74.0           | -19.4       | 1.62 V             | 111                  | 57.5             | -2.9                     |
| 4                                                    | 20475.00        | 41.9 AV                 | 54.0           | -12.1       | 1.62 V             | 111                  | 44.8             | -2.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                      |                   |                               |                                                                      |
|----------------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode              | 802.11be (EHT160) | Channel                       | CH 207 : 6985 MHz                                                    |
| Frequency Range      | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=1 kHz, DET=Peak |
| Input Power (System) | 120 Vac, 60 Hz    | Environmental Conditions      | 24 °C, 72 % RH                                                       |
| Tested By            | Willy Lin         |                               |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13970.00       | 47.9 PK                 | 88.2           | -40.3       | 2.93 H             | 96                   | 32.6             | 15.3                     |
| 2                                                    | #13970.00       | 37.3 AV                 | 68.2           | -30.9       | 2.93 H             | 96                   | 22.0             | 15.3                     |
| 3                                                    | 20955.00        | 54.0 PK                 | 74.0           | -20.0       | 1.73 H             | 214                  | 56.6             | -2.6                     |
| 4                                                    | 20955.00        | 42.4 AV                 | 54.0           | -11.6       | 1.73 H             | 214                  | 45.0             | -2.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13970.00       | 49.1 PK                 | 88.2           | -39.1       | 1.92 V             | 221                  | 33.8             | 15.3                     |
| 2                                                    | #13970.00       | 38.1 AV                 | 68.2           | -30.1       | 1.92 V             | 221                  | 22.8             | 15.3                     |
| 3                                                    | 20955.00        | 54.9 PK                 | 74.0           | -19.1       | 1.64 V             | 123                  | 57.5             | -2.6                     |
| 4                                                    | 20955.00        | 42.1 AV                 | 54.0           | -11.9       | 1.64 V             | 123                  | 44.7             | -2.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 48.9 PK                 | 74.0           | -25.1       | 3.06 H             | 65                   | 36.7             | 12.2                     |
| 2                                                    | 11910.00        | 38.2 AV                 | 54.0           | -15.8       | 3.06 H             | 65                   | 26.0             | 12.2                     |
| 3                                                    | 17865.00        | 51.5 PK                 | 74.0           | -22.5       | 1.67 H             | 189                  | 29.7             | 21.8                     |
| 4                                                    | 17865.00        | 42.6 AV                 | 54.0           | -11.4       | 1.67 H             | 189                  | 20.8             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 48.1 PK                 | 74.0           | -25.9       | 2.13 V             | 157                  | 35.9             | 12.2                     |
| 2                                                    | 11910.00        | 38.3 AV                 | 54.0           | -15.7       | 2.13 V             | 157                  | 26.1             | 12.2                     |
| 3                                                    | 17865.00        | 52.6 PK                 | 74.0           | -21.4       | 1.66 V             | 55                   | 30.8             | 21.8                     |
| 4                                                    | 17865.00        | 41.4 AV                 | 54.0           | -12.6       | 1.66 V             | 55                   | 19.6             | 21.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 49.5 PK                 | 88.2           | -38.7       | 3.09 H             | 65                   | 36.4             | 13.1                     |
| 2                                                    | #12830.00       | 38.7 AV                 | 68.2           | -29.5       | 3.09 H             | 65                   | 25.6             | 13.1                     |
| 3                                                    | 19245.00        | 51.9 PK                 | 74.0           | -22.1       | 1.55 H             | 209                  | 55.9             | -4.0                     |
| 4                                                    | 19245.00        | 42.8 AV                 | 54.0           | -11.2       | 1.55 H             | 209                  | 46.8             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 48.5 PK                 | 88.2           | -39.7       | 2.04 V             | 141                  | 35.4             | 13.1                     |
| 2                                                    | #12830.00       | 38.8 AV                 | 68.2           | -29.4       | 2.04 V             | 141                  | 25.7             | 13.1                     |
| 3                                                    | 19245.00        | 51.9 PK                 | 74.0           | -22.1       | 1.60 V             | 46                   | 55.9             | -4.0                     |
| 4                                                    | 19245.00        | 40.9 AV                 | 54.0           | -13.1       | 1.60 V             | 46                   | 44.9             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 97 : 6435 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 49.6 PK                 | 88.2           | -38.6       | 3.09 H             | 48                   | 36.3             | 13.3                     |
| 2                                                    | #12870.00       | 38.8 AV                 | 68.2           | -29.4       | 3.09 H             | 48                   | 25.5             | 13.3                     |
| 3                                                    | 19305.00        | 51.5 PK                 | 74.0           | -22.5       | 1.57 H             | 192                  | 55.4             | -3.9                     |
| 4                                                    | 19305.00        | 42.6 AV                 | 54.0           | -11.4       | 1.57 H             | 192                  | 46.5             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 47.9 PK                 | 88.2           | -40.3       | 2.13 V             | 140                  | 34.6             | 13.3                     |
| 2                                                    | #12870.00       | 38.3 AV                 | 68.2           | -29.9       | 2.13 V             | 140                  | 25.0             | 13.3                     |
| 3                                                    | 19305.00        | 52.4 PK                 | 74.0           | -21.6       | 1.71 V             | 55                   | 56.3             | -3.9                     |
| 4                                                    | 19305.00        | 41.1 AV                 | 54.0           | -12.9       | 1.71 V             | 55                   | 45.0             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 113 : 6515 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 49.9 PK                 | 88.2           | -38.3       | 3.07 H             | 70                   | 36.6             | 13.3                     |
| 2                                                    | #13030.00       | 38.7 AV                 | 68.2           | -29.5       | 3.07 H             | 70                   | 25.4             | 13.3                     |
| 3                                                    | 19545.00        | 51.5 PK                 | 74.0           | -22.5       | 1.66 H             | 200                  | 55.2             | -3.7                     |
| 4                                                    | 19545.00        | 42.9 AV                 | 54.0           | -11.1       | 1.66 H             | 200                  | 46.6             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 48.6 PK                 | 88.2           | -39.6       | 2.14 V             | 143                  | 35.3             | 13.3                     |
| 2                                                    | #13030.00       | 38.6 AV                 | 68.2           | -29.6       | 2.14 V             | 143                  | 25.3             | 13.3                     |
| 3                                                    | 19545.00        | 52.1 PK                 | 74.0           | -21.9       | 1.72 V             | 44                   | 55.8             | -3.7                     |
| 4                                                    | 19545.00        | 41.2 AV                 | 54.0           | -12.8       | 1.72 V             | 44                   | 44.9             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 48.9 PK                 | 88.2           | -39.3       | 3.04 H             | 58                   | 35.6             | 13.3                     |
| 2                                                    | #13070.00       | 38.2 AV                 | 68.2           | -30.0       | 3.04 H             | 58                   | 24.9             | 13.3                     |
| 3                                                    | 19605.00        | 51.0 PK                 | 74.0           | -23.0       | 1.57 H             | 201                  | 55.0             | -4.0                     |
| 4                                                    | 19605.00        | 42.3 AV                 | 54.0           | -11.7       | 1.57 H             | 201                  | 46.3             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 48.5 PK                 | 88.2           | -39.7       | 2.14 V             | 147                  | 35.2             | 13.3                     |
| 2                                                    | #13070.00       | 38.8 AV                 | 68.2           | -29.4       | 2.14 V             | 147                  | 25.5             | 13.3                     |
| 3                                                    | 19605.00        | 52.7 PK                 | 74.0           | -21.3       | 1.67 V             | 38                   | 56.7             | -4.0                     |
| 4                                                    | 19605.00        | 41.5 AV                 | 54.0           | -12.5       | 1.67 V             | 38                   | 45.5             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 185 : 6875 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 49.5 PK                 | 88.2           | -38.7       | 3.10 H             | 48                   | 34.3             | 15.2                     |
| 2                                                    | #13750.00       | 38.8 AV                 | 68.2           | -29.4       | 3.10 H             | 48                   | 23.6             | 15.2                     |
| 3                                                    | 20625.00        | 51.5 PK                 | 74.0           | -22.5       | 1.64 H             | 187                  | 54.8             | -3.3                     |
| 4                                                    | 20625.00        | 43.0 AV                 | 54.0           | -11.0       | 1.64 H             | 187                  | 46.3             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 48.5 PK                 | 88.2           | -39.7       | 2.14 V             | 135                  | 33.3             | 15.2                     |
| 2                                                    | #13750.00       | 38.8 AV                 | 68.2           | -29.4       | 2.14 V             | 135                  | 23.6             | 15.2                     |
| 3                                                    | 20625.00        | 52.0 PK                 | 74.0           | -22.0       | 1.62 V             | 43                   | 55.3             | -3.3                     |
| 4                                                    | 20625.00        | 41.1 AV                 | 54.0           | -12.9       | 1.62 V             | 43                   | 44.4             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 209 : 6995 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 49.8 PK                 | 88.2           | -38.4       | 3.02 H             | 61                   | 34.4             | 15.4                     |
| 2                                                    | #13990.00       | 38.7 AV                 | 68.2           | -29.5       | 3.02 H             | 61                   | 23.3             | 15.4                     |
| 3                                                    | 20985.00        | 51.5 PK                 | 74.0           | -22.5       | 1.61 H             | 183                  | 54.2             | -2.7                     |
| 4                                                    | 20985.00        | 42.9 AV                 | 54.0           | -11.1       | 1.61 H             | 183                  | 45.6             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 48.6 PK                 | 88.2           | -39.6       | 2.06 V             | 149                  | 33.2             | 15.4                     |
| 2                                                    | #13990.00       | 38.7 AV                 | 68.2           | -29.5       | 2.06 V             | 149                  | 23.3             | 15.4                     |
| 3                                                    | 20985.00        | 52.6 PK                 | 74.0           | -21.4       | 1.61 V             | 45                   | 55.3             | -2.7                     |
| 4                                                    | 20985.00        | 41.4 AV                 | 54.0           | -12.6       | 1.61 V             | 45                   | 44.1             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 233 : 7115 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 48.9 PK                 | 88.2           | -39.3       | 3.11 H             | 74                   | 33.6             | 15.3                     |
| 2                                                    | #14230.00       | 38.2 AV                 | 68.2           | -30.0       | 3.11 H             | 74                   | 22.9             | 15.3                     |
| 3                                                    | 21345.00        | 51.2 PK                 | 74.0           | -22.8       | 1.66 H             | 203                  | 53.4             | -2.2                     |
| 4                                                    | 21345.00        | 42.6 AV                 | 54.0           | -11.4       | 1.66 H             | 203                  | 44.8             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 47.4 PK                 | 88.2           | -40.8       | 2.08 V             | 152                  | 32.1             | 15.3                     |
| 2                                                    | #14230.00       | 37.9 AV                 | 68.2           | -30.3       | 2.08 V             | 152                  | 22.6             | 15.3                     |
| 3                                                    | 21345.00        | 52.4 PK                 | 74.0           | -21.6       | 1.61 V             | 56                   | 54.6             | -2.2                     |
| 4                                                    | 21345.00        | 41.6 AV                 | 54.0           | -12.4       | 1.61 V             | 56                   | 43.8             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 49.6 PK                 | 74.0           | -24.4       | 3.11 H             | 70                   | 37.4             | 12.2                     |
| 2                                                    | 11910.00        | 38.6 AV                 | 54.0           | -15.4       | 3.11 H             | 70                   | 26.4             | 12.2                     |
| 3                                                    | 17865.00        | 51.3 PK                 | 74.0           | -22.7       | 1.61 H             | 202                  | 29.5             | 21.8                     |
| 4                                                    | 17865.00        | 42.7 AV                 | 54.0           | -11.3       | 1.61 H             | 202                  | 20.9             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.9 PK                 | 74.0           | -26.1       | 2.03 V             | 131                  | 35.7             | 12.2                     |
| 2                                                    | 11910.00        | 38.2 AV                 | 54.0           | -15.8       | 2.03 V             | 131                  | 26.0             | 12.2                     |
| 3                                                    | 17865.00        | 52.7 PK                 | 74.0           | -21.3       | 1.67 V             | 29                   | 30.9             | 21.8                     |
| 4                                                    | 17865.00        | 41.7 AV                 | 54.0           | -12.3       | 1.67 V             | 29                   | 19.9             | 21.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 49.8 PK                 | 88.2           | -38.4       | 3.06 H             | 68                   | 36.7             | 13.1                     |
| 2                                                    | #12830.00       | 38.8 AV                 | 68.2           | -29.4       | 3.06 H             | 68                   | 25.7             | 13.1                     |
| 3                                                    | 19245.00        | 51.5 PK                 | 74.0           | -22.5       | 1.66 H             | 191                  | 55.5             | -4.0                     |
| 4                                                    | 19245.00        | 43.0 AV                 | 54.0           | -11.0       | 1.66 H             | 191                  | 47.0             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 48.4 PK                 | 88.2           | -39.8       | 2.12 V             | 146                  | 35.3             | 13.1                     |
| 2                                                    | #12830.00       | 38.8 AV                 | 68.2           | -29.4       | 2.12 V             | 146                  | 25.7             | 13.1                     |
| 3                                                    | 19245.00        | 52.1 PK                 | 74.0           | -21.9       | 1.61 V             | 56                   | 56.1             | -4.0                     |
| 4                                                    | 19245.00        | 41.1 AV                 | 54.0           | -12.9       | 1.61 V             | 56                   | 45.1             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 97 : 6435 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 48.9 PK                 | 88.2           | -39.3       | 3.05 H             | 49                   | 35.6             | 13.3                     |
| 2                                                    | #12870.00       | 38.2 AV                 | 68.2           | -30.0       | 3.05 H             | 49                   | 24.9             | 13.3                     |
| 3                                                    | 19305.00        | 51.5 PK                 | 74.0           | -22.5       | 1.65 H             | 188                  | 55.4             | -3.9                     |
| 4                                                    | 19305.00        | 43.0 AV                 | 54.0           | -11.0       | 1.65 H             | 188                  | 46.9             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 48.1 PK                 | 88.2           | -40.1       | 2.10 V             | 157                  | 34.8             | 13.3                     |
| 2                                                    | #12870.00       | 38.6 AV                 | 68.2           | -29.6       | 2.10 V             | 157                  | 25.3             | 13.3                     |
| 3                                                    | 19305.00        | 52.8 PK                 | 74.0           | -21.2       | 1.62 V             | 54                   | 56.7             | -3.9                     |
| 4                                                    | 19305.00        | 41.6 AV                 | 54.0           | -12.4       | 1.62 V             | 54                   | 45.5             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 113 : 6515 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 49.3 PK                 | 88.2           | -38.9       | 3.11 H             | 57                   | 36.0             | 13.3                     |
| 2                                                    | #13030.00       | 38.5 AV                 | 68.2           | -29.7       | 3.11 H             | 57                   | 25.2             | 13.3                     |
| 3                                                    | 19545.00        | 51.1 PK                 | 74.0           | -22.9       | 1.55 H             | 203                  | 54.8             | -3.7                     |
| 4                                                    | 19545.00        | 42.5 AV                 | 54.0           | -11.5       | 1.55 H             | 203                  | 46.2             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 48.5 PK                 | 88.2           | -39.7       | 2.05 V             | 131                  | 35.2             | 13.3                     |
| 2                                                    | #13030.00       | 38.7 AV                 | 68.2           | -29.5       | 2.05 V             | 131                  | 25.4             | 13.3                     |
| 3                                                    | 19545.00        | 52.4 PK                 | 74.0           | -21.6       | 1.65 V             | 55                   | 56.1             | -3.7                     |
| 4                                                    | 19545.00        | 41.4 AV                 | 54.0           | -12.6       | 1.65 V             | 55                   | 45.1             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 49.7 PK                 | 88.2           | -38.5       | 3.04 H             | 78                   | 36.4             | 13.3                     |
| 2                                                    | #13070.00       | 38.7 AV                 | 68.2           | -29.5       | 3.04 H             | 78                   | 25.4             | 13.3                     |
| 3                                                    | 19605.00        | 51.2 PK                 | 74.0           | -22.8       | 1.62 H             | 207                  | 55.2             | -4.0                     |
| 4                                                    | 19605.00        | 42.3 AV                 | 54.0           | -11.7       | 1.62 H             | 207                  | 46.3             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 48.3 PK                 | 88.2           | -39.9       | 2.13 V             | 134                  | 35.0             | 13.3                     |
| 2                                                    | #13070.00       | 38.5 AV                 | 68.2           | -29.7       | 2.13 V             | 134                  | 25.2             | 13.3                     |
| 3                                                    | 19605.00        | 52.7 PK                 | 74.0           | -21.3       | 1.68 V             | 35                   | 56.7             | -4.0                     |
| 4                                                    | 19605.00        | 41.7 AV                 | 54.0           | -12.3       | 1.68 V             | 35                   | 45.7             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 185 : 6875 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 50.0 PK                 | 88.2           | -38.2       | 3.10 H             | 53                   | 34.8             | 15.2                     |
| 2                                                    | #13750.00       | 39.0 AV                 | 68.2           | -29.2       | 3.10 H             | 53                   | 23.8             | 15.2                     |
| 3                                                    | 20625.00        | 52.1 PK                 | 74.0           | -21.9       | 1.59 H             | 211                  | 55.4             | -3.3                     |
| 4                                                    | 20625.00        | 43.0 AV                 | 54.0           | -11.0       | 1.59 H             | 211                  | 46.3             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 48.3 PK                 | 88.2           | -39.9       | 2.13 V             | 135                  | 33.1             | 15.2                     |
| 2                                                    | #13750.00       | 38.8 AV                 | 68.2           | -29.4       | 2.13 V             | 135                  | 23.6             | 15.2                     |
| 3                                                    | 20625.00        | 52.2 PK                 | 74.0           | -21.8       | 1.60 V             | 29                   | 55.5             | -3.3                     |
| 4                                                    | 20625.00        | 41.2 AV                 | 54.0           | -12.8       | 1.60 V             | 29                   | 44.5             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 209 : 6995 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 49.5 PK                 | 88.2           | -38.7       | 3.01 H             | 78                   | 34.1             | 15.4                     |
| 2                                                    | #13990.00       | 38.8 AV                 | 68.2           | -29.4       | 3.01 H             | 78                   | 23.4             | 15.4                     |
| 3                                                    | 20985.00        | 51.5 PK                 | 74.0           | -22.5       | 1.58 H             | 211                  | 54.2             | -2.7                     |
| 4                                                    | 20985.00        | 43.0 AV                 | 54.0           | -11.0       | 1.58 H             | 211                  | 45.7             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 48.3 PK                 | 88.2           | -39.9       | 2.05 V             | 145                  | 32.9             | 15.4                     |
| 2                                                    | #13990.00       | 38.7 AV                 | 68.2           | -29.5       | 2.05 V             | 145                  | 23.3             | 15.4                     |
| 3                                                    | 20985.00        | 52.3 PK                 | 74.0           | -21.7       | 1.68 V             | 59                   | 55.0             | -2.7                     |
| 4                                                    | 20985.00        | 41.4 AV                 | 54.0           | -12.6       | 1.68 V             | 59                   | 44.1             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 233 : 7115 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 49.6 PK                 | 88.2           | -38.6       | 3.07 H             | 79                   | 34.3             | 15.3                     |
| 2                                                    | #14230.00       | 38.8 AV                 | 68.2           | -29.4       | 3.07 H             | 79                   | 23.5             | 15.3                     |
| 3                                                    | 21345.00        | 51.1 PK                 | 74.0           | -22.9       | 1.57 H             | 211                  | 53.3             | -2.2                     |
| 4                                                    | 21345.00        | 42.3 AV                 | 54.0           | -11.7       | 1.57 H             | 211                  | 44.5             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 48.3 PK                 | 88.2           | -39.9       | 2.14 V             | 155                  | 33.0             | 15.3                     |
| 2                                                    | #14230.00       | 38.8 AV                 | 68.2           | -29.4       | 2.14 V             | 155                  | 23.5             | 15.3                     |
| 3                                                    | 21345.00        | 52.5 PK                 | 74.0           | -21.5       | 1.70 V             | 30                   | 54.7             | -2.2                     |
| 4                                                    | 21345.00        | 41.5 AV                 | 54.0           | -12.5       | 1.70 V             | 30                   | 43.7             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 50.1 PK                 | 74.0           | -23.9       | 3.06 H             | 56                   | 37.9             | 12.2                     |
| 2                                                    | 11910.00        | 39.0 AV                 | 54.0           | -15.0       | 3.06 H             | 56                   | 26.8             | 12.2                     |
| 3                                                    | 17865.00        | 51.3 PK                 | 74.0           | -22.7       | 1.56 H             | 199                  | 29.5             | 21.8                     |
| 4                                                    | 17865.00        | 42.4 AV                 | 54.0           | -11.6       | 1.56 H             | 199                  | 20.6             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 48.2 PK                 | 74.0           | -25.8       | 2.02 V             | 132                  | 36.0             | 12.2                     |
| 2                                                    | 11910.00        | 38.2 AV                 | 54.0           | -15.8       | 2.02 V             | 132                  | 26.0             | 12.2                     |
| 3                                                    | 17865.00        | 52.1 PK                 | 74.0           | -21.9       | 1.68 V             | 53                   | 30.3             | 21.8                     |
| 4                                                    | 17865.00        | 41.3 AV                 | 54.0           | -12.7       | 1.68 V             | 53                   | 19.5             | 21.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 49.9 PK                 | 88.2           | -38.3       | 3.08 H             | 63                   | 36.8             | 13.1                     |
| 2                                                    | #12830.00       | 39.1 AV                 | 68.2           | -29.1       | 3.08 H             | 63                   | 26.0             | 13.1                     |
| 3                                                    | 19245.00        | 51.4 PK                 | 74.0           | -22.6       | 1.66 H             | 208                  | 55.4             | -4.0                     |
| 4                                                    | 19245.00        | 42.4 AV                 | 54.0           | -11.6       | 1.66 H             | 208                  | 46.4             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 48.5 PK                 | 88.2           | -39.7       | 2.07 V             | 145                  | 35.4             | 13.1                     |
| 2                                                    | #12830.00       | 38.7 AV                 | 68.2           | -29.5       | 2.07 V             | 145                  | 25.6             | 13.1                     |
| 3                                                    | 19245.00        | 52.2 PK                 | 74.0           | -21.8       | 1.67 V             | 46                   | 56.2             | -4.0                     |
| 4                                                    | 19245.00        | 40.8 AV                 | 54.0           | -13.2       | 1.67 V             | 46                   | 44.8             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 97 : 6435 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 49.9 PK                 | 88.2           | -38.3       | 3.01 H             | 66                   | 36.6             | 13.3                     |
| 2                                                    | #12870.00       | 38.8 AV                 | 68.2           | -29.4       | 3.01 H             | 66                   | 25.5             | 13.3                     |
| 3                                                    | 19305.00        | 51.6 PK                 | 74.0           | -22.4       | 1.59 H             | 196                  | 55.5             | -3.9                     |
| 4                                                    | 19305.00        | 43.0 AV                 | 54.0           | -11.0       | 1.59 H             | 196                  | 46.9             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 47.6 PK                 | 88.2           | -40.6       | 2.03 V             | 160                  | 34.3             | 13.3                     |
| 2                                                    | #12870.00       | 38.2 AV                 | 68.2           | -30.0       | 2.03 V             | 160                  | 24.9             | 13.3                     |
| 3                                                    | 19305.00        | 52.6 PK                 | 74.0           | -21.4       | 1.69 V             | 59                   | 56.5             | -3.9                     |
| 4                                                    | 19305.00        | 41.5 AV                 | 54.0           | -12.5       | 1.69 V             | 59                   | 45.4             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 113 : 6515 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 48.9 PK                 | 88.2           | -39.3       | 3.03 H             | 60                   | 35.6             | 13.3                     |
| 2                                                    | #13030.00       | 38.3 AV                 | 68.2           | -29.9       | 3.03 H             | 60                   | 25.0             | 13.3                     |
| 3                                                    | 19545.00        | 51.2 PK                 | 74.0           | -22.8       | 1.59 H             | 206                  | 54.9             | -3.7                     |
| 4                                                    | 19545.00        | 42.6 AV                 | 54.0           | -11.4       | 1.59 H             | 206                  | 46.3             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 48.2 PK                 | 88.2           | -40.0       | 2.08 V             | 137                  | 34.9             | 13.3                     |
| 2                                                    | #13030.00       | 38.7 AV                 | 68.2           | -29.5       | 2.08 V             | 137                  | 25.4             | 13.3                     |
| 3                                                    | 19545.00        | 53.0 PK                 | 74.0           | -21.0       | 1.68 V             | 50                   | 56.7             | -3.7                     |
| 4                                                    | 19545.00        | 41.6 AV                 | 54.0           | -12.4       | 1.68 V             | 50                   | 45.3             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 49.3 PK                 | 88.2           | -38.9       | 3.00 H             | 74                   | 36.0             | 13.3                     |
| 2                                                    | #13070.00       | 38.2 AV                 | 68.2           | -30.0       | 3.00 H             | 74                   | 24.9             | 13.3                     |
| 3                                                    | 19605.00        | 51.7 PK                 | 74.0           | -22.3       | 1.60 H             | 181                  | 55.7             | -4.0                     |
| 4                                                    | 19605.00        | 42.8 AV                 | 54.0           | -11.2       | 1.60 H             | 181                  | 46.8             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 48.3 PK                 | 88.2           | -39.9       | 2.08 V             | 134                  | 35.0             | 13.3                     |
| 2                                                    | #13070.00       | 38.4 AV                 | 68.2           | -29.8       | 2.08 V             | 134                  | 25.1             | 13.3                     |
| 3                                                    | 19605.00        | 52.0 PK                 | 74.0           | -22.0       | 1.63 V             | 55                   | 56.0             | -4.0                     |
| 4                                                    | 19605.00        | 40.8 AV                 | 54.0           | -13.2       | 1.63 V             | 55                   | 44.8             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 185 : 6875 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 49.6 PK                 | 88.2           | -38.6       | 3.10 H             | 53                   | 34.4             | 15.2                     |
| 2                                                    | #13750.00       | 38.7 AV                 | 68.2           | -29.5       | 3.10 H             | 53                   | 23.5             | 15.2                     |
| 3                                                    | 20625.00        | 50.8 PK                 | 74.0           | -23.2       | 1.67 H             | 181                  | 54.1             | -3.3                     |
| 4                                                    | 20625.00        | 42.2 AV                 | 54.0           | -11.8       | 1.67 H             | 181                  | 45.5             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 47.3 PK                 | 88.2           | -40.9       | 2.10 V             | 147                  | 32.1             | 15.2                     |
| 2                                                    | #13750.00       | 37.9 AV                 | 68.2           | -30.3       | 2.10 V             | 147                  | 22.7             | 15.2                     |
| 3                                                    | 20625.00        | 51.8 PK                 | 74.0           | -22.2       | 1.67 V             | 57                   | 55.1             | -3.3                     |
| 4                                                    | 20625.00        | 40.9 AV                 | 54.0           | -13.1       | 1.67 V             | 57                   | 44.2             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 209 : 6995 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 49.1 PK                 | 88.2           | -39.1       | 3.11 H             | 51                   | 33.7             | 15.4                     |
| 2                                                    | #13990.00       | 38.4 AV                 | 68.2           | -29.8       | 3.11 H             | 51                   | 23.0             | 15.4                     |
| 3                                                    | 20985.00        | 51.3 PK                 | 74.0           | -22.7       | 1.58 H             | 196                  | 54.0             | -2.7                     |
| 4                                                    | 20985.00        | 42.5 AV                 | 54.0           | -11.5       | 1.58 H             | 196                  | 45.2             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 47.8 PK                 | 88.2           | -40.4       | 2.09 V             | 137                  | 32.4             | 15.4                     |
| 2                                                    | #13990.00       | 38.3 AV                 | 68.2           | -29.9       | 2.09 V             | 137                  | 22.9             | 15.4                     |
| 3                                                    | 20985.00        | 52.3 PK                 | 74.0           | -21.7       | 1.71 V             | 47                   | 55.0             | -2.7                     |
| 4                                                    | 20985.00        | 41.3 AV                 | 54.0           | -12.7       | 1.71 V             | 47                   | 44.0             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 233 : 7115 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 49.8 PK                 | 88.2           | -38.4       | 3.12 H             | 74                   | 34.5             | 15.3                     |
| 2                                                    | #14230.00       | 38.9 AV                 | 68.2           | -29.3       | 3.12 H             | 74                   | 23.6             | 15.3                     |
| 3                                                    | 21345.00        | 51.4 PK                 | 74.0           | -22.6       | 1.59 H             | 182                  | 53.6             | -2.2                     |
| 4                                                    | 21345.00        | 42.7 AV                 | 54.0           | -11.3       | 1.59 H             | 182                  | 44.9             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 47.8 PK                 | 88.2           | -40.4       | 2.03 V             | 147                  | 32.5             | 15.3                     |
| 2                                                    | #14230.00       | 38.0 AV                 | 68.2           | -30.2       | 2.03 V             | 147                  | 22.7             | 15.3                     |
| 3                                                    | 21345.00        | 52.3 PK                 | 74.0           | -21.7       | 1.72 V             | 29                   | 54.5             | -2.2                     |
| 4                                                    | 21345.00        | 41.1 AV                 | 54.0           | -12.9       | 1.72 V             | 29                   | 43.3             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 49.8 PK                 | 74.0           | -24.2       | 3.06 H             | 57                   | 37.6             | 12.2                     |
| 2                                                    | 11910.00        | 38.9 AV                 | 54.0           | -15.1       | 3.06 H             | 57                   | 26.7             | 12.2                     |
| 3                                                    | 17865.00        | 51.3 PK                 | 74.0           | -22.7       | 1.64 H             | 206                  | 29.5             | 21.8                     |
| 4                                                    | 17865.00        | 42.4 AV                 | 54.0           | -11.6       | 1.64 H             | 206                  | 20.6             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.8 PK                 | 74.0           | -26.2       | 2.07 V             | 143                  | 35.6             | 12.2                     |
| 2                                                    | 11910.00        | 38.2 AV                 | 54.0           | -15.8       | 2.07 V             | 143                  | 26.0             | 12.2                     |
| 3                                                    | 17865.00        | 52.4 PK                 | 74.0           | -21.6       | 1.69 V             | 43                   | 30.6             | 21.8                     |
| 4                                                    | 17865.00        | 41.5 AV                 | 54.0           | -12.5       | 1.69 V             | 43                   | 19.7             | 21.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 49.2 PK                 | 88.2           | -39.0       | 3.08 H             | 50                   | 36.1             | 13.1                     |
| 2                                                    | #12830.00       | 38.2 AV                 | 68.2           | -30.0       | 3.08 H             | 50                   | 25.1             | 13.1                     |
| 3                                                    | 19245.00        | 51.2 PK                 | 74.0           | -22.8       | 1.65 H             | 211                  | 55.2             | -4.0                     |
| 4                                                    | 19245.00        | 42.2 AV                 | 54.0           | -11.8       | 1.65 H             | 211                  | 46.2             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.8 PK                 | 88.2           | -40.4       | 2.14 V             | 150                  | 34.7             | 13.1                     |
| 2                                                    | #12830.00       | 38.2 AV                 | 68.2           | -30.0       | 2.14 V             | 150                  | 25.1             | 13.1                     |
| 3                                                    | 19245.00        | 52.5 PK                 | 74.0           | -21.5       | 1.61 V             | 54                   | 56.5             | -4.0                     |
| 4                                                    | 19245.00        | 41.2 AV                 | 54.0           | -12.8       | 1.61 V             | 54                   | 45.2             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 97 : 6435 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 49.0 PK                 | 88.2           | -39.2       | 3.00 H             | 51                   | 35.7             | 13.3                     |
| 2                                                    | #12870.00       | 38.3 AV                 | 68.2           | -29.9       | 3.00 H             | 51                   | 25.0             | 13.3                     |
| 3                                                    | 19305.00        | 51.5 PK                 | 74.0           | -22.5       | 1.58 H             | 210                  | 55.4             | -3.9                     |
| 4                                                    | 19305.00        | 42.8 AV                 | 54.0           | -11.2       | 1.58 H             | 210                  | 46.7             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 48.5 PK                 | 88.2           | -39.7       | 2.07 V             | 157                  | 35.2             | 13.3                     |
| 2                                                    | #12870.00       | 38.6 AV                 | 68.2           | -29.6       | 2.07 V             | 157                  | 25.3             | 13.3                     |
| 3                                                    | 19305.00        | 52.6 PK                 | 74.0           | -21.4       | 1.70 V             | 43                   | 56.5             | -3.9                     |
| 4                                                    | 19305.00        | 41.7 AV                 | 54.0           | -12.3       | 1.70 V             | 43                   | 45.6             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 113 : 6515 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 49.5 PK                 | 88.2           | -38.7       | 3.04 H             | 59                   | 36.2             | 13.3                     |
| 2                                                    | #13030.00       | 38.5 AV                 | 68.2           | -29.7       | 3.04 H             | 59                   | 25.2             | 13.3                     |
| 3                                                    | 19545.00        | 52.2 PK                 | 74.0           | -21.8       | 1.62 H             | 204                  | 55.9             | -3.7                     |
| 4                                                    | 19545.00        | 43.1 AV                 | 54.0           | -10.9       | 1.62 H             | 204                  | 46.8             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 48.5 PK                 | 88.2           | -39.7       | 2.14 V             | 144                  | 35.2             | 13.3                     |
| 2                                                    | #13030.00       | 38.7 AV                 | 68.2           | -29.5       | 2.14 V             | 144                  | 25.4             | 13.3                     |
| 3                                                    | 19545.00        | 52.5 PK                 | 74.0           | -21.5       | 1.67 V             | 43                   | 56.2             | -3.7                     |
| 4                                                    | 19545.00        | 41.7 AV                 | 54.0           | -12.3       | 1.67 V             | 43                   | 45.4             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 49.3 PK                 | 88.2           | -38.9       | 3.01 H             | 60                   | 36.0             | 13.3                     |
| 2                                                    | #13070.00       | 38.7 AV                 | 68.2           | -29.5       | 3.01 H             | 60                   | 25.4             | 13.3                     |
| 3                                                    | 19605.00        | 51.4 PK                 | 74.0           | -22.6       | 1.63 H             | 206                  | 55.4             | -4.0                     |
| 4                                                    | 19605.00        | 42.3 AV                 | 54.0           | -11.7       | 1.63 H             | 206                  | 46.3             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 48.5 PK                 | 88.2           | -39.7       | 2.13 V             | 150                  | 35.2             | 13.3                     |
| 2                                                    | #13070.00       | 38.8 AV                 | 68.2           | -29.4       | 2.13 V             | 150                  | 25.5             | 13.3                     |
| 3                                                    | 19605.00        | 52.8 PK                 | 74.0           | -21.2       | 1.61 V             | 45                   | 56.8             | -4.0                     |
| 4                                                    | 19605.00        | 41.8 AV                 | 54.0           | -12.2       | 1.61 V             | 45                   | 45.8             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 185 : 6875 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 50.0 PK                 | 88.2           | -38.2       | 3.10 H             | 50                   | 34.8             | 15.2                     |
| 2                                                    | #13750.00       | 39.0 AV                 | 68.2           | -29.2       | 3.10 H             | 50                   | 23.8             | 15.2                     |
| 3                                                    | 20625.00        | 51.5 PK                 | 74.0           | -22.5       | 1.57 H             | 199                  | 54.8             | -3.3                     |
| 4                                                    | 20625.00        | 42.9 AV                 | 54.0           | -11.1       | 1.57 H             | 199                  | 46.2             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 47.9 PK                 | 88.2           | -40.3       | 2.06 V             | 137                  | 32.7             | 15.2                     |
| 2                                                    | #13750.00       | 37.9 AV                 | 68.2           | -30.3       | 2.06 V             | 137                  | 22.7             | 15.2                     |
| 3                                                    | 20625.00        | 51.9 PK                 | 74.0           | -22.1       | 1.62 V             | 50                   | 55.2             | -3.3                     |
| 4                                                    | 20625.00        | 40.9 AV                 | 54.0           | -13.1       | 1.62 V             | 50                   | 44.2             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 209 : 6995 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 49.3 PK                 | 88.2           | -38.9       | 3.08 H             | 57                   | 33.9             | 15.4                     |
| 2                                                    | #13990.00       | 38.2 AV                 | 68.2           | -30.0       | 3.08 H             | 57                   | 22.8             | 15.4                     |
| 3                                                    | 20985.00        | 51.9 PK                 | 74.0           | -22.1       | 1.67 H             | 184                  | 54.6             | -2.7                     |
| 4                                                    | 20985.00        | 43.1 AV                 | 54.0           | -10.9       | 1.67 H             | 184                  | 45.8             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 48.2 PK                 | 88.2           | -40.0       | 2.08 V             | 132                  | 32.8             | 15.4                     |
| 2                                                    | #13990.00       | 38.5 AV                 | 68.2           | -29.7       | 2.08 V             | 132                  | 23.1             | 15.4                     |
| 3                                                    | 20985.00        | 52.3 PK                 | 74.0           | -21.7       | 1.61 V             | 40                   | 55.0             | -2.7                     |
| 4                                                    | 20985.00        | 41.1 AV                 | 54.0           | -12.9       | 1.61 V             | 40                   | 43.8             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                 |                                          |                                                                      |
|-----------------------------|---------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52+26-tone MRU | <b>Channel</b>                           | CH 233 : 7115 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 49.2 PK                 | 88.2           | -39.0       | 3.11 H             | 56                   | 33.9             | 15.3                     |
| 2                                                    | #14230.00       | 38.5 AV                 | 68.2           | -29.7       | 3.11 H             | 56                   | 23.2             | 15.3                     |
| 3                                                    | 21345.00        | 51.8 PK                 | 74.0           | -22.2       | 1.62 H             | 198                  | 54.0             | -2.2                     |
| 4                                                    | 21345.00        | 43.1 AV                 | 54.0           | -10.9       | 1.62 H             | 198                  | 45.3             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 48.8 PK                 | 88.2           | -39.4       | 2.09 V             | 141                  | 33.5             | 15.3                     |
| 2                                                    | #14230.00       | 38.8 AV                 | 68.2           | -29.4       | 2.09 V             | 141                  | 23.5             | 15.3                     |
| 3                                                    | 21345.00        | 53.1 PK                 | 74.0           | -20.9       | 1.63 V             | 32                   | 55.3             | -2.2                     |
| 4                                                    | 21345.00        | 41.8 AV                 | 54.0           | -12.2       | 1.63 V             | 32                   | 44.0             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 50.1 PK                 | 74.0           | -23.9       | 3.11 H             | 68                   | 37.9             | 12.2                     |
| 2                                                    | 11910.00        | 39.0 AV                 | 54.0           | -15.0       | 3.11 H             | 68                   | 26.8             | 12.2                     |
| 3                                                    | 17865.00        | 52.2 PK                 | 74.0           | -21.8       | 1.61 H             | 193                  | 30.4             | 21.8                     |
| 4                                                    | 17865.00        | 43.1 AV                 | 54.0           | -10.9       | 1.61 H             | 193                  | 21.3             | 21.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 48.1 PK                 | 74.0           | -25.9       | 2.07 V             | 143                  | 35.9             | 12.2                     |
| 2                                                    | 11910.00        | 38.4 AV                 | 54.0           | -15.6       | 2.07 V             | 143                  | 26.2             | 12.2                     |
| 3                                                    | 17865.00        | 52.5 PK                 | 74.0           | -21.5       | 1.68 V             | 54                   | 30.7             | 21.8                     |
| 4                                                    | 17865.00        | 41.6 AV                 | 54.0           | -12.4       | 1.68 V             | 54                   | 19.8             | 21.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 49.2 PK                 | 88.2           | -39.0       | 3.03 H             | 67                   | 36.1             | 13.1                     |
| 2                                                    | #12830.00       | 38.6 AV                 | 68.2           | -29.6       | 3.03 H             | 67                   | 25.5             | 13.1                     |
| 3                                                    | 19245.00        | 51.1 PK                 | 74.0           | -22.9       | 1.61 H             | 207                  | 55.1             | -4.0                     |
| 4                                                    | 19245.00        | 42.1 AV                 | 54.0           | -11.9       | 1.61 H             | 207                  | 46.1             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 48.2 PK                 | 88.2           | -40.0       | 2.12 V             | 159                  | 35.1             | 13.1                     |
| 2                                                    | #12830.00       | 38.7 AV                 | 68.2           | -29.5       | 2.12 V             | 159                  | 25.6             | 13.1                     |
| 3                                                    | 19245.00        | 52.2 PK                 | 74.0           | -21.8       | 1.63 V             | 37                   | 56.2             | -4.0                     |
| 4                                                    | 19245.00        | 40.9 AV                 | 54.0           | -13.1       | 1.63 V             | 37                   | 44.9             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 97 : 6435 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 48.9 PK                 | 88.2           | -39.3       | 3.10 H             | 52                   | 35.6             | 13.3                     |
| 2                                                    | #12870.00       | 38.3 AV                 | 68.2           | -29.9       | 3.10 H             | 52                   | 25.0             | 13.3                     |
| 3                                                    | 19305.00        | 51.1 PK                 | 74.0           | -22.9       | 1.60 H             | 194                  | 55.0             | -3.9                     |
| 4                                                    | 19305.00        | 42.3 AV                 | 54.0           | -11.7       | 1.60 H             | 194                  | 46.2             | -3.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12870.00       | 47.9 PK                 | 88.2           | -40.3       | 2.09 V             | 156                  | 34.6             | 13.3                     |
| 2                                                    | #12870.00       | 38.2 AV                 | 68.2           | -30.0       | 2.09 V             | 156                  | 24.9             | 13.3                     |
| 3                                                    | 19305.00        | 52.6 PK                 | 74.0           | -21.4       | 1.67 V             | 53                   | 56.5             | -3.9                     |
| 4                                                    | 19305.00        | 41.7 AV                 | 54.0           | -12.3       | 1.67 V             | 53                   | 45.6             | -3.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 113 : 6515 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 49.9 PK                 | 88.2           | -38.3       | 3.11 H             | 64                   | 36.6             | 13.3                     |
| 2                                                    | #13030.00       | 39.1 AV                 | 68.2           | -29.1       | 3.11 H             | 64                   | 25.8             | 13.3                     |
| 3                                                    | 19545.00        | 51.3 PK                 | 74.0           | -22.7       | 1.62 H             | 181                  | 55.0             | -3.7                     |
| 4                                                    | 19545.00        | 42.3 AV                 | 54.0           | -11.7       | 1.62 H             | 181                  | 46.0             | -3.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13030.00       | 48.1 PK                 | 88.2           | -40.1       | 2.06 V             | 141                  | 34.8             | 13.3                     |
| 2                                                    | #13030.00       | 38.4 AV                 | 68.2           | -29.8       | 2.06 V             | 141                  | 25.1             | 13.3                     |
| 3                                                    | 19545.00        | 52.9 PK                 | 74.0           | -21.1       | 1.71 V             | 50                   | 56.6             | -3.7                     |
| 4                                                    | 19545.00        | 41.6 AV                 | 54.0           | -12.4       | 1.71 V             | 50                   | 45.3             | -3.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 49.3 PK                 | 88.2           | -38.9       | 3.06 H             | 53                   | 36.0             | 13.3                     |
| 2                                                    | #13070.00       | 38.3 AV                 | 68.2           | -29.9       | 3.06 H             | 53                   | 25.0             | 13.3                     |
| 3                                                    | 19605.00        | 51.5 PK                 | 74.0           | -22.5       | 1.67 H             | 202                  | 55.5             | -4.0                     |
| 4                                                    | 19605.00        | 42.4 AV                 | 54.0           | -11.6       | 1.67 H             | 202                  | 46.4             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.9 PK                 | 88.2           | -40.3       | 2.06 V             | 130                  | 34.6             | 13.3                     |
| 2                                                    | #13070.00       | 38.2 AV                 | 68.2           | -30.0       | 2.06 V             | 130                  | 24.9             | 13.3                     |
| 3                                                    | 19605.00        | 52.7 PK                 | 74.0           | -21.3       | 1.70 V             | 32                   | 56.7             | -4.0                     |
| 4                                                    | 19605.00        | 41.6 AV                 | 54.0           | -12.4       | 1.70 V             | 32                   | 45.6             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 185 : 6875 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 49.3 PK                 | 88.2           | -38.9       | 3.02 H             | 66                   | 34.1             | 15.2                     |
| 2                                                    | #13750.00       | 38.6 AV                 | 68.2           | -29.6       | 3.02 H             | 66                   | 23.4             | 15.2                     |
| 3                                                    | 20625.00        | 52.0 PK                 | 74.0           | -22.0       | 1.65 H             | 193                  | 55.3             | -3.3                     |
| 4                                                    | 20625.00        | 43.1 AV                 | 54.0           | -10.9       | 1.65 H             | 193                  | 46.4             | -3.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13750.00       | 47.8 PK                 | 88.2           | -40.4       | 2.06 V             | 154                  | 32.6             | 15.2                     |
| 2                                                    | #13750.00       | 38.0 AV                 | 68.2           | -30.2       | 2.06 V             | 154                  | 22.8             | 15.2                     |
| 3                                                    | 20625.00        | 52.9 PK                 | 74.0           | -21.1       | 1.65 V             | 54                   | 56.2             | -3.3                     |
| 4                                                    | 20625.00        | 41.6 AV                 | 54.0           | -12.4       | 1.65 V             | 54                   | 44.9             | -3.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 209 : 6995 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 49.3 PK                 | 88.2           | -38.9       | 3.04 H             | 59                   | 33.9             | 15.4                     |
| 2                                                    | #13990.00       | 38.4 AV                 | 68.2           | -29.8       | 3.04 H             | 59                   | 23.0             | 15.4                     |
| 3                                                    | 20985.00        | 50.8 PK                 | 74.0           | -23.2       | 1.62 H             | 184                  | 53.5             | -2.7                     |
| 4                                                    | 20985.00        | 42.2 AV                 | 54.0           | -11.8       | 1.62 H             | 184                  | 44.9             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13990.00       | 48.5 PK                 | 88.2           | -39.7       | 2.13 V             | 150                  | 33.1             | 15.4                     |
| 2                                                    | #13990.00       | 38.6 AV                 | 68.2           | -29.6       | 2.13 V             | 150                  | 23.2             | 15.4                     |
| 3                                                    | 20985.00        | 52.1 PK                 | 74.0           | -21.9       | 1.71 V             | 57                   | 54.8             | -2.7                     |
| 4                                                    | 20985.00        | 41.2 AV                 | 54.0           | -12.8       | 1.71 V             | 57                   | 43.9             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                  |                                          |                                                                      |
|-----------------------------|----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106+26-tone MRU | <b>Channel</b>                           | CH 233 : 7115 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 49.8 PK                 | 88.2           | -38.4       | 3.07 H             | 75                   | 34.5             | 15.3                     |
| 2                                                    | #14230.00       | 38.6 AV                 | 68.2           | -29.6       | 3.07 H             | 75                   | 23.3             | 15.3                     |
| 3                                                    | 21345.00        | 51.4 PK                 | 74.0           | -22.6       | 1.65 H             | 201                  | 53.6             | -2.2                     |
| 4                                                    | 21345.00        | 42.6 AV                 | 54.0           | -11.4       | 1.65 H             | 201                  | 44.8             | -2.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14230.00       | 47.7 PK                 | 88.2           | -40.5       | 2.09 V             | 143                  | 32.4             | 15.3                     |
| 2                                                    | #14230.00       | 38.2 AV                 | 68.2           | -30.0       | 2.09 V             | 143                  | 22.9             | 15.3                     |
| 3                                                    | 21345.00        | 52.2 PK                 | 74.0           | -21.8       | 1.62 V             | 55                   | 54.4             | -2.2                     |
| 4                                                    | 21345.00        | 41.1 AV                 | 54.0           | -12.9       | 1.62 V             | 55                   | 43.3             | -2.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 7 : 5985 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 49.8 PK                 | 74.0           | -24.2       | 3.09 H             | 53                   | 37.6             | 12.2                     |
| 2                                                    | 11970.00        | 38.7 AV                 | 54.0           | -15.3       | 3.09 H             | 53                   | 26.5             | 12.2                     |
| 3                                                    | 17955.00        | 51.6 PK                 | 74.0           | -22.4       | 1.55 H             | 199                  | 28.4             | 23.2                     |
| 4                                                    | 17955.00        | 43.0 AV                 | 54.0           | -11.0       | 1.55 H             | 199                  | 19.8             | 23.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 48.0 PK                 | 74.0           | -26.0       | 2.07 V             | 158                  | 35.8             | 12.2                     |
| 2                                                    | 11970.00        | 38.0 AV                 | 54.0           | -16.0       | 2.07 V             | 158                  | 25.8             | 12.2                     |
| 3                                                    | 17955.00        | 53.1 PK                 | 74.0           | -20.9       | 1.61 V             | 59                   | 29.9             | 23.2                     |
| 4                                                    | 17955.00        | 41.8 AV                 | 54.0           | -12.2       | 1.61 V             | 59                   | 18.6             | 23.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 87 : 6385 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12770.00       | 49.7 PK                 | 88.2           | -38.5       | 3.10 H             | 63                   | 36.6             | 13.1                     |
| 2                                                    | #12770.00       | 38.6 AV                 | 68.2           | -29.6       | 3.10 H             | 63                   | 25.5             | 13.1                     |
| 3                                                    | 19155.00        | 52.0 PK                 | 74.0           | -22.0       | 1.58 H             | 187                  | 56.2             | -4.2                     |
| 4                                                    | 19155.00        | 43.0 AV                 | 54.0           | -11.0       | 1.58 H             | 187                  | 47.2             | -4.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12770.00       | 48.5 PK                 | 88.2           | -39.7       | 2.06 V             | 129                  | 35.4             | 13.1                     |
| 2                                                    | #12770.00       | 38.6 AV                 | 68.2           | -29.6       | 2.06 V             | 129                  | 25.5             | 13.1                     |
| 3                                                    | 19155.00        | 53.1 PK                 | 74.0           | -20.9       | 1.64 V             | 51                   | 57.3             | -4.2                     |
| 4                                                    | 19155.00        | 41.7 AV                 | 54.0           | -12.3       | 1.64 V             | 51                   | 45.9             | -4.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 103 : 6465 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12930.00       | 49.2 PK                 | 88.2           | -39.0       | 3.06 H             | 49                   | 35.8             | 13.4                     |
| 2                                                    | #12930.00       | 38.1 AV                 | 68.2           | -30.1       | 3.06 H             | 49                   | 24.7             | 13.4                     |
| 3                                                    | 19395.00        | 50.9 PK                 | 74.0           | -23.1       | 1.61 H             | 187                  | 54.4             | -3.5                     |
| 4                                                    | 19395.00        | 42.2 AV                 | 54.0           | -11.8       | 1.61 H             | 187                  | 45.7             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12930.00       | 48.0 PK                 | 88.2           | -40.2       | 2.09 V             | 153                  | 34.6             | 13.4                     |
| 2                                                    | #12930.00       | 38.2 AV                 | 68.2           | -30.0       | 2.09 V             | 153                  | 24.8             | 13.4                     |
| 3                                                    | 19395.00        | 52.5 PK                 | 74.0           | -21.5       | 1.71 V             | 42                   | 56.0             | -3.5                     |
| 4                                                    | 19395.00        | 41.6 AV                 | 54.0           | -12.4       | 1.71 V             | 42                   | 45.1             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 119 : 6545 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13090.00       | 49.2 PK                 | 88.2           | -39.0       | 3.07 H             | 73                   | 35.7             | 13.5                     |
| 2                                                    | #13090.00       | 38.2 AV                 | 68.2           | -30.0       | 3.07 H             | 73                   | 24.7             | 13.5                     |
| 3                                                    | 19635.00        | 51.8 PK                 | 74.0           | -22.2       | 1.56 H             | 210                  | 55.8             | -4.0                     |
| 4                                                    | 19635.00        | 43.1 AV                 | 54.0           | -10.9       | 1.56 H             | 210                  | 47.1             | -4.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13090.00       | 48.0 PK                 | 88.2           | -40.2       | 2.14 V             | 140                  | 34.5             | 13.5                     |
| 2                                                    | #13090.00       | 38.3 AV                 | 68.2           | -29.9       | 2.14 V             | 140                  | 24.8             | 13.5                     |
| 3                                                    | 19635.00        | 52.1 PK                 | 74.0           | -21.9       | 1.62 V             | 53                   | 56.1             | -4.0                     |
| 4                                                    | 19635.00        | 41.0 AV                 | 54.0           | -13.0       | 1.62 V             | 53                   | 45.0             | -4.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 183 : 6865 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13730.00       | 49.4 PK                 | 88.2           | -38.8       | 3.10 H             | 49                   | 34.3             | 15.1                     |
| 2                                                    | #13730.00       | 38.5 AV                 | 68.2           | -29.7       | 3.10 H             | 49                   | 23.4             | 15.1                     |
| 3                                                    | 20595.00        | 51.6 PK                 | 74.0           | -22.4       | 1.62 H             | 194                  | 55.0             | -3.4                     |
| 4                                                    | 20595.00        | 42.9 AV                 | 54.0           | -11.1       | 1.62 H             | 194                  | 46.3             | -3.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13730.00       | 48.1 PK                 | 88.2           | -40.1       | 2.10 V             | 138                  | 33.0             | 15.1                     |
| 2                                                    | #13730.00       | 38.5 AV                 | 68.2           | -29.7       | 2.10 V             | 138                  | 23.4             | 15.1                     |
| 3                                                    | 20595.00        | 52.6 PK                 | 74.0           | -21.4       | 1.66 V             | 55                   | 56.0             | -3.4                     |
| 4                                                    | 20595.00        | 41.8 AV                 | 54.0           | -12.2       | 1.66 V             | 55                   | 45.2             | -3.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 199 : 6945 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13890.00       | 49.5 PK                 | 88.2           | -38.7       | 3.06 H             | 77                   | 34.6             | 14.9                     |
| 2                                                    | #13890.00       | 38.6 AV                 | 68.2           | -29.6       | 3.06 H             | 77                   | 23.7             | 14.9                     |
| 3                                                    | 20835.00        | 51.9 PK                 | 74.0           | -22.1       | 1.55 H             | 187                  | 54.6             | -2.7                     |
| 4                                                    | 20835.00        | 43.0 AV                 | 54.0           | -11.0       | 1.55 H             | 187                  | 45.7             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13890.00       | 48.1 PK                 | 88.2           | -40.1       | 2.10 V             | 133                  | 33.2             | 14.9                     |
| 2                                                    | #13890.00       | 38.2 AV                 | 68.2           | -30.0       | 2.10 V             | 133                  | 23.3             | 14.9                     |
| 3                                                    | 20835.00        | 52.0 PK                 | 74.0           | -22.0       | 1.63 V             | 45                   | 54.7             | -2.7                     |
| 4                                                    | 20835.00        | 41.2 AV                 | 54.0           | -12.8       | 1.63 V             | 45                   | 43.9             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                   |                                          |                                                                      |
|-----------------------------|-----------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) 484+242-tone MRU | <b>Channel</b>                           | CH 215 : 7025 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                    | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14050.00       | 49.6 PK                 | 88.2           | -38.6       | 3.04 H             | 52                   | 34.2             | 15.4                     |
| 2                                                    | #14050.00       | 38.7 AV                 | 68.2           | -29.5       | 3.04 H             | 52                   | 23.3             | 15.4                     |
| 3                                                    | 21075.00        | 51.4 PK                 | 74.0           | -22.6       | 1.64 H             | 183                  | 54.1             | -2.7                     |
| 4                                                    | 21075.00        | 42.8 AV                 | 54.0           | -11.2       | 1.64 H             | 183                  | 45.5             | -2.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #14050.00       | 48.0 PK                 | 88.2           | -40.2       | 2.04 V             | 154                  | 32.6             | 15.4                     |
| 2                                                    | #14050.00       | 38.1 AV                 | 68.2           | -30.1       | 2.04 V             | 154                  | 22.7             | 15.4                     |
| 3                                                    | 21075.00        | 52.3 PK                 | 74.0           | -21.7       | 1.61 V             | 59                   | 55.0             | -2.7                     |
| 4                                                    | 21075.00        | 41.0 AV                 | 54.0           | -13.0       | 1.61 V             | 59                   | 43.7             | -2.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                    |                                          |                                                                      |
|-----------------------------|------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) 996+484-tone MRU | <b>Channel</b>                           | CH 15 : 6025 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                     | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                     | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                          |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 49.6 PK                 | 74.0           | -24.4       | 3.11 H             | 63                   | 37.1             | 12.5                     |
| 2                                                    | 12050.00        | 38.6 AV                 | 54.0           | -15.4       | 3.11 H             | 63                   | 26.1             | 12.5                     |
| 3                                                    | 18075.00        | 51.8 PK                 | 74.0           | -22.2       | 1.66 H             | 187                  | 56.3             | -4.5                     |
| 4                                                    | 18075.00        | 42.7 AV                 | 54.0           | -11.3       | 1.66 H             | 187                  | 47.2             | -4.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 48.6 PK                 | 74.0           | -25.4       | 2.03 V             | 133                  | 36.1             | 12.5                     |
| 2                                                    | 12050.00        | 38.7 AV                 | 54.0           | -15.3       | 2.03 V             | 133                  | 26.2             | 12.5                     |
| 3                                                    | 18075.00        | 52.4 PK                 | 74.0           | -21.6       | 1.64 V             | 58                   | 56.9             | -4.5                     |
| 4                                                    | 18075.00        | 41.1 AV                 | 54.0           | -12.9       | 1.64 V             | 58                   | 45.6             | -4.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                    |                                          |                                                                      |
|-----------------------------|------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) 996+484-tone MRU | <b>Channel</b>                           | CH 79 : 6345 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                     | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                     | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                          |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 49.8 PK                 | 74.0           | -24.2       | 3.09 H             | 71                   | 36.8             | 13.0                     |
| 2                                                    | 12690.00        | 38.6 AV                 | 54.0           | -15.4       | 3.09 H             | 71                   | 25.6             | 13.0                     |
| 3                                                    | 19035.00        | 51.8 PK                 | 74.0           | -22.2       | 1.63 H             | 200                  | 55.9             | -4.1                     |
| 4                                                    | 19035.00        | 42.8 AV                 | 54.0           | -11.2       | 1.63 H             | 200                  | 46.9             | -4.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 48.1 PK                 | 74.0           | -25.9       | 2.12 V             | 146                  | 35.1             | 13.0                     |
| 2                                                    | 12690.00        | 38.5 AV                 | 54.0           | -15.5       | 2.12 V             | 146                  | 25.5             | 13.0                     |
| 3                                                    | 19035.00        | 52.9 PK                 | 74.0           | -21.1       | 1.63 V             | 42                   | 57.0             | -4.1                     |
| 4                                                    | 19035.00        | 41.7 AV                 | 54.0           | -12.3       | 1.63 V             | 42                   | 45.8             | -4.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                    |                                          |                                                                      |
|-----------------------------|------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) 996+484-tone MRU | <b>Channel</b>                           | CH 111 : 6505 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                     | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                     | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                          |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13010.00       | 49.7 PK                 | 88.2           | -38.5       | 3.10 H             | 53                   | 36.5             | 13.2                     |
| 2                                                    | #13010.00       | 39.0 AV                 | 68.2           | -29.2       | 3.10 H             | 53                   | 25.8             | 13.2                     |
| 3                                                    | 19515.00        | 51.5 PK                 | 74.0           | -22.5       | 1.64 H             | 206                  | 55.0             | -3.5                     |
| 4                                                    | 19515.00        | 42.5 AV                 | 54.0           | -11.5       | 1.64 H             | 206                  | 46.0             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13010.00       | 48.1 PK                 | 88.2           | -40.1       | 2.02 V             | 135                  | 34.9             | 13.2                     |
| 2                                                    | #13010.00       | 38.4 AV                 | 68.2           | -29.8       | 2.02 V             | 135                  | 25.2             | 13.2                     |
| 3                                                    | 19515.00        | 52.0 PK                 | 74.0           | -22.0       | 1.62 V             | 31                   | 55.5             | -3.5                     |
| 4                                                    | 19515.00        | 41.1 AV                 | 54.0           | -12.9       | 1.62 V             | 31                   | 44.6             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                    |                                          |                                                                      |
|-----------------------------|------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) 996+484-tone MRU | <b>Channel</b>                           | CH 143 : 6665 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                     | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                     | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                          |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 49.5 PK                 | 74.0           | -24.5       | 3.12 H             | 68                   | 35.7             | 13.8                     |
| 2                                                    | 13330.00        | 38.4 AV                 | 54.0           | -15.6       | 3.12 H             | 68                   | 24.6             | 13.8                     |
| 3                                                    | 19995.00        | 51.5 PK                 | 74.0           | -22.5       | 1.62 H             | 189                  | 55.3             | -3.8                     |
| 4                                                    | 19995.00        | 42.5 AV                 | 54.0           | -11.5       | 1.62 H             | 189                  | 46.3             | -3.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 48.4 PK                 | 74.0           | -25.6       | 2.14 V             | 129                  | 34.6             | 13.8                     |
| 2                                                    | 13330.00        | 38.7 AV                 | 54.0           | -15.3       | 2.14 V             | 129                  | 24.9             | 13.8                     |
| 3                                                    | 19995.00        | 52.2 PK                 | 74.0           | -21.8       | 1.71 V             | 49                   | 56.0             | -3.8                     |
| 4                                                    | 19995.00        | 41.1 AV                 | 54.0           | -12.9       | 1.71 V             | 49                   | 44.9             | -3.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                    |                                          |                                                                      |
|-----------------------------|------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) 996+484-tone MRU | <b>Channel</b>                           | CH 175 : 6825 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                     | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                     | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                          |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13650.00       | 49.5 PK                 | 88.2           | -38.7       | 3.05 H             | 50                   | 34.4             | 15.1                     |
| 2                                                    | #13650.00       | 38.5 AV                 | 68.2           | -29.7       | 3.05 H             | 50                   | 23.4             | 15.1                     |
| 3                                                    | 20475.00        | 51.1 PK                 | 74.0           | -22.9       | 1.55 H             | 205                  | 54.0             | -2.9                     |
| 4                                                    | 20475.00        | 42.2 AV                 | 54.0           | -11.8       | 1.55 H             | 205                  | 45.1             | -2.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13650.00       | 48.1 PK                 | 88.2           | -40.1       | 2.09 V             | 147                  | 33.0             | 15.1                     |
| 2                                                    | #13650.00       | 38.5 AV                 | 68.2           | -29.7       | 2.09 V             | 147                  | 23.4             | 15.1                     |
| 3                                                    | 20475.00        | 52.2 PK                 | 74.0           | -21.8       | 1.72 V             | 59                   | 55.1             | -2.9                     |
| 4                                                    | 20475.00        | 41.1 AV                 | 54.0           | -12.9       | 1.72 V             | 59                   | 44.0             | -2.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                    |                                          |                                                                      |
|-----------------------------|------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) 996+484-tone MRU | <b>Channel</b>                           | CH 207 : 6985 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                     | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                     | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                          |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13970.00       | 50.0 PK                 | 88.2           | -38.2       | 3.09 H             | 70                   | 34.7             | 15.3                     |
| 2                                                    | #13970.00       | 39.0 AV                 | 68.2           | -29.2       | 3.09 H             | 70                   | 23.7             | 15.3                     |
| 3                                                    | 20955.00        | 52.0 PK                 | 74.0           | -22.0       | 1.65 H             | 187                  | 54.6             | -2.6                     |
| 4                                                    | 20955.00        | 43.0 AV                 | 54.0           | -11.0       | 1.65 H             | 187                  | 45.6             | -2.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13970.00       | 48.3 PK                 | 88.2           | -39.9       | 2.14 V             | 152                  | 33.0             | 15.3                     |
| 2                                                    | #13970.00       | 38.6 AV                 | 68.2           | -29.6       | 2.14 V             | 152                  | 23.3             | 15.3                     |
| 3                                                    | 20955.00        | 52.7 PK                 | 74.0           | -21.3       | 1.65 V             | 43                   | 55.3             | -2.6                     |
| 4                                                    | 20955.00        | 41.5 AV                 | 54.0           | -12.5       | 1.65 V             | 43                   | 44.1             | -2.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                           |                                          |                                                                      |
|-----------------------------|-------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>996+484+242-tone MRU | <b>Channel</b>                           | CH 15 : 6025 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                            | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                            | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                 |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 49.2 PK                 | 74.0           | -24.8       | 3.08 H             | 79                   | 36.7             | 12.5                     |
| 2                                                    | 12050.00        | 38.3 AV                 | 54.0           | -15.7       | 3.08 H             | 79                   | 25.8             | 12.5                     |
| 3                                                    | 18075.00        | 51.0 PK                 | 74.0           | -23.0       | 1.67 H             | 193                  | 55.5             | -4.5                     |
| 4                                                    | 18075.00        | 42.3 AV                 | 54.0           | -11.7       | 1.67 H             | 193                  | 46.8             | -4.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 48.0 PK                 | 74.0           | -26.0       | 2.11 V             | 157                  | 35.5             | 12.5                     |
| 2                                                    | 12050.00        | 38.6 AV                 | 54.0           | -15.4       | 2.11 V             | 157                  | 26.1             | 12.5                     |
| 3                                                    | 18075.00        | 52.3 PK                 | 74.0           | -21.7       | 1.66 V             | 36                   | 56.8             | -4.5                     |
| 4                                                    | 18075.00        | 41.0 AV                 | 54.0           | -13.0       | 1.66 V             | 36                   | 45.5             | -4.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                           |                                          |                                                                      |
|-----------------------------|-------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>996+484+242-tone MRU | <b>Channel</b>                           | CH 79 : 6345 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                            | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                            | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                 |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 49.8 PK                 | 74.0           | -24.2       | 3.06 H             | 71                   | 36.8             | 13.0                     |
| 2                                                    | 12690.00        | 38.6 AV                 | 54.0           | -15.4       | 3.06 H             | 71                   | 25.6             | 13.0                     |
| 3                                                    | 19035.00        | 51.4 PK                 | 74.0           | -22.6       | 1.61 H             | 199                  | 55.5             | -4.1                     |
| 4                                                    | 19035.00        | 42.6 AV                 | 54.0           | -11.4       | 1.61 H             | 199                  | 46.7             | -4.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 48.0 PK                 | 74.0           | -26.0       | 2.08 V             | 150                  | 35.0             | 13.0                     |
| 2                                                    | 12690.00        | 38.2 AV                 | 54.0           | -15.8       | 2.08 V             | 150                  | 25.2             | 13.0                     |
| 3                                                    | 19035.00        | 51.9 PK                 | 74.0           | -22.1       | 1.69 V             | 51                   | 56.0             | -4.1                     |
| 4                                                    | 19035.00        | 41.0 AV                 | 54.0           | -13.0       | 1.69 V             | 51                   | 45.1             | -4.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                           |                                          |                                                                      |
|-----------------------------|-------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>996+484+242-tone MRU | <b>Channel</b>                           | CH 111 : 6505 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                            | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                            | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                 |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13010.00       | 50.2 PK                 | 88.2           | -38.0       | 3.08 H             | 71                   | 37.0             | 13.2                     |
| 2                                                    | #13010.00       | 39.1 AV                 | 68.2           | -29.1       | 3.08 H             | 71                   | 25.9             | 13.2                     |
| 3                                                    | 19515.00        | 51.5 PK                 | 74.0           | -22.5       | 1.64 H             | 206                  | 55.0             | -3.5                     |
| 4                                                    | 19515.00        | 42.9 AV                 | 54.0           | -11.1       | 1.64 H             | 206                  | 46.4             | -3.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13010.00       | 47.8 PK                 | 88.2           | -40.4       | 2.03 V             | 139                  | 34.6             | 13.2                     |
| 2                                                    | #13010.00       | 38.0 AV                 | 68.2           | -30.2       | 2.03 V             | 139                  | 24.8             | 13.2                     |
| 3                                                    | 19515.00        | 52.2 PK                 | 74.0           | -21.8       | 1.64 V             | 58                   | 55.7             | -3.5                     |
| 4                                                    | 19515.00        | 41.1 AV                 | 54.0           | -12.9       | 1.64 V             | 58                   | 44.6             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                           |                                          |                                                                      |
|-----------------------------|-------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>996+484+242-tone MRU | <b>Channel</b>                           | CH 143 : 6665 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                            | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                            | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                 |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 49.5 PK                 | 74.0           | -24.5       | 3.09 H             | 65                   | 35.7             | 13.8                     |
| 2                                                    | 13330.00        | 38.5 AV                 | 54.0           | -15.5       | 3.09 H             | 65                   | 24.7             | 13.8                     |
| 3                                                    | 19995.00        | 51.1 PK                 | 74.0           | -22.9       | 1.56 H             | 211                  | 54.9             | -3.8                     |
| 4                                                    | 19995.00        | 42.4 AV                 | 54.0           | -11.6       | 1.56 H             | 211                  | 46.2             | -3.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 48.8 PK                 | 74.0           | -25.2       | 2.04 V             | 140                  | 35.0             | 13.8                     |
| 2                                                    | 13330.00        | 38.8 AV                 | 54.0           | -15.2       | 2.04 V             | 140                  | 25.0             | 13.8                     |
| 3                                                    | 19995.00        | 52.2 PK                 | 74.0           | -21.8       | 1.66 V             | 35                   | 56.0             | -3.8                     |
| 4                                                    | 19995.00        | 41.1 AV                 | 54.0           | -12.9       | 1.66 V             | 35                   | 44.9             | -3.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                           |                                          |                                                                      |
|-----------------------------|-------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>996+484+242-tone MRU | <b>Channel</b>                           | CH 175 : 6825 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                            | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                            | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                 |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13650.00       | 49.1 PK                 | 88.2           | -39.1       | 3.05 H             | 61                   | 34.0             | 15.1                     |
| 2                                                    | #13650.00       | 38.4 AV                 | 68.2           | -29.8       | 3.05 H             | 61                   | 23.3             | 15.1                     |
| 3                                                    | 20475.00        | 50.8 PK                 | 74.0           | -23.2       | 1.61 H             | 193                  | 53.7             | -2.9                     |
| 4                                                    | 20475.00        | 42.3 AV                 | 54.0           | -11.7       | 1.61 H             | 193                  | 45.2             | -2.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13650.00       | 47.4 PK                 | 88.2           | -40.8       | 2.13 V             | 139                  | 32.3             | 15.1                     |
| 2                                                    | #13650.00       | 37.9 AV                 | 68.2           | -30.3       | 2.13 V             | 139                  | 22.8             | 15.1                     |
| 3                                                    | 20475.00        | 51.9 PK                 | 74.0           | -22.1       | 1.69 V             | 35                   | 54.8             | -2.9                     |
| 4                                                    | 20475.00        | 41.0 AV                 | 54.0           | -13.0       | 1.69 V             | 35                   | 43.9             | -2.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                           |                                          |                                                                      |
|-----------------------------|-------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>996+484+242-tone MRU | <b>Channel</b>                           | CH 207 : 6985 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                            | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                            | <b>Environmental Conditions</b>          | 23 °C, 72 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                 |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13970.00       | 49.5 PK                 | 88.2           | -38.7       | 3.07 H             | 56                   | 34.2             | 15.3                     |
| 2                                                    | #13970.00       | 38.3 AV                 | 68.2           | -29.9       | 3.07 H             | 56                   | 23.0             | 15.3                     |
| 3                                                    | 20955.00        | 51.7 PK                 | 74.0           | -22.3       | 1.67 H             | 196                  | 54.3             | -2.6                     |
| 4                                                    | 20955.00        | 42.9 AV                 | 54.0           | -11.1       | 1.67 H             | 196                  | 45.5             | -2.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13970.00       | 47.8 PK                 | 88.2           | -40.4       | 2.09 V             | 146                  | 32.5             | 15.3                     |
| 2                                                    | #13970.00       | 38.0 AV                 | 68.2           | -30.2       | 2.09 V             | 146                  | 22.7             | 15.3                     |
| 3                                                    | 20955.00        | 53.0 PK                 | 74.0           | -21.0       | 1.67 V             | 28                   | 55.6             | -2.6                     |
| 4                                                    | 20955.00        | 41.8 AV                 | 54.0           | -12.2       | 1.67 V             | 28                   | 44.4             | -2.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

under control of a Standard Power AP

Mode A



Conducted Unwanted Emissions

1TX

|                 |                |                          |                 |
|-----------------|----------------|--------------------------|-----------------|
| RF Mode         | 802.11a        | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung    |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5457.76         | 46.08 PK                | 74             | -27.92      | -57.55                  | 8.37                   | -49.18           |
| 2                            | 5457.76         | 40.33 AV                | 54             | -13.67      | -63.3                   | 8.37                   | -54.93           |
| 3                            | 11908.44        | 50.2 PK                 | 74             | -23.8       | -53.43                  | 8.37                   | -45.06           |
| 4                            | 11908.44        | 44.64 AV                | 54             | -9.36       | -58.99                  | 8.37                   | -50.62           |
| 5                            | 21091.8         | 42.66 PK                | 74             | -31.34      | -60.97                  | 8.37                   | -52.6            |
| 6                            | 21091.8         | 34.65 AV                | 54             | -19.35      | -68.98                  | 8.37                   | -60.61           |
| 7                            | 23907.2         | 46.3 PK                 | 74             | -27.7       | -57.33                  | 8.37                   | -48.96           |
| 8                            | 23907.2         | 36.29 AV                | 54             | -17.71      | -67.34                  | 8.37                   | -58.97           |
| 9                            | 39595.11        | 44.47 PK                | 74             | -29.53      | -59.16                  | 8.37                   | -50.79           |
| 10                           | 39595.11        | 30.97 AV                | 54             | -23.03      | -72.66                  | 8.37                   | -64.29           |


Note: Margin value = Emission Level - Limit value

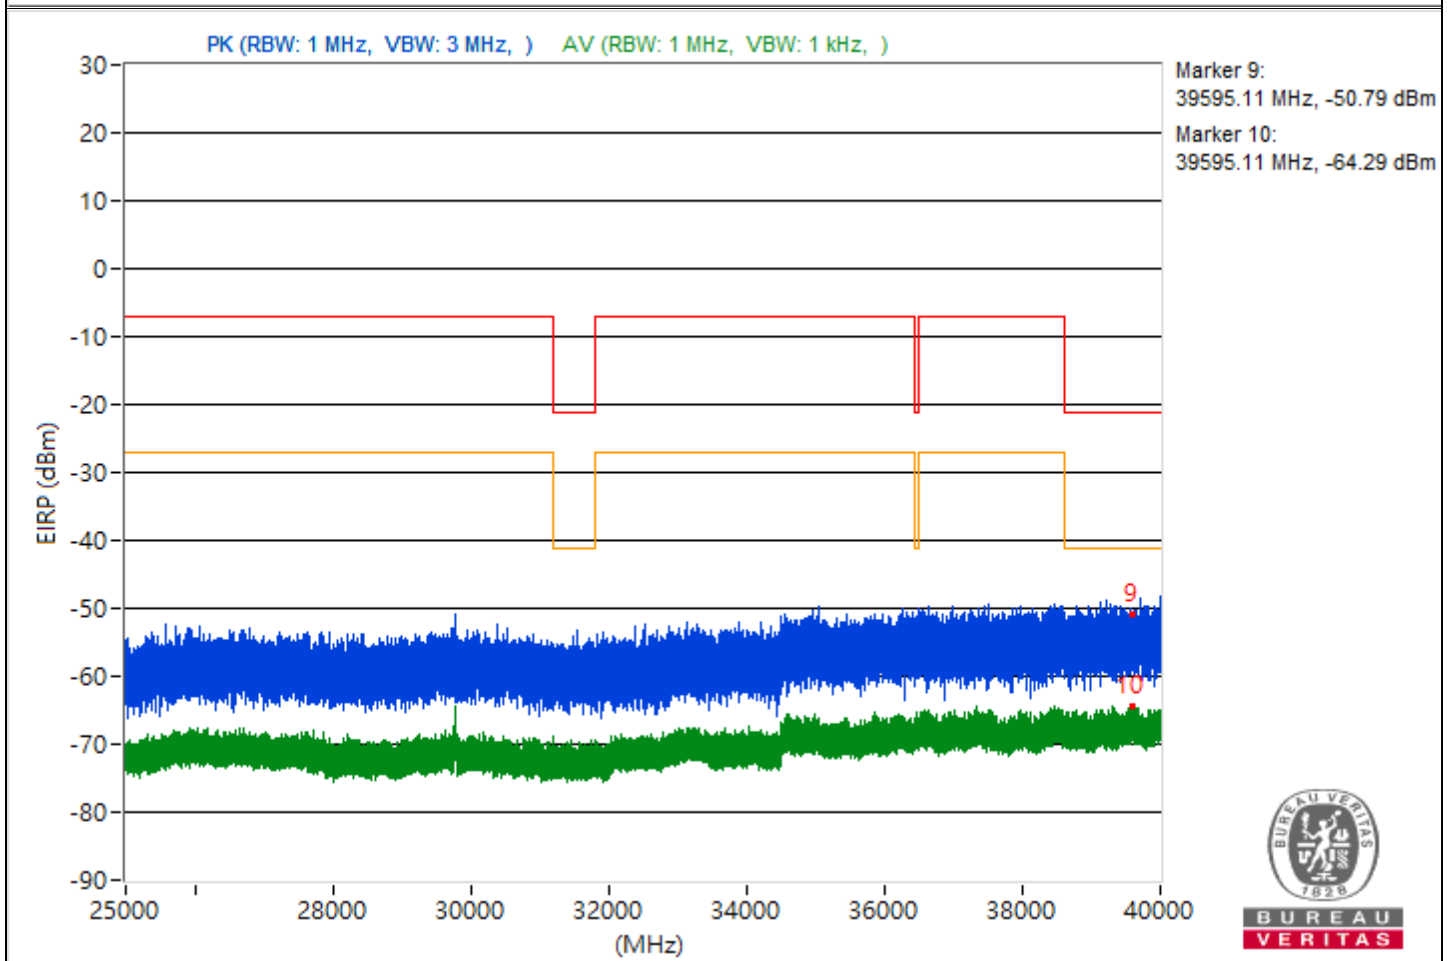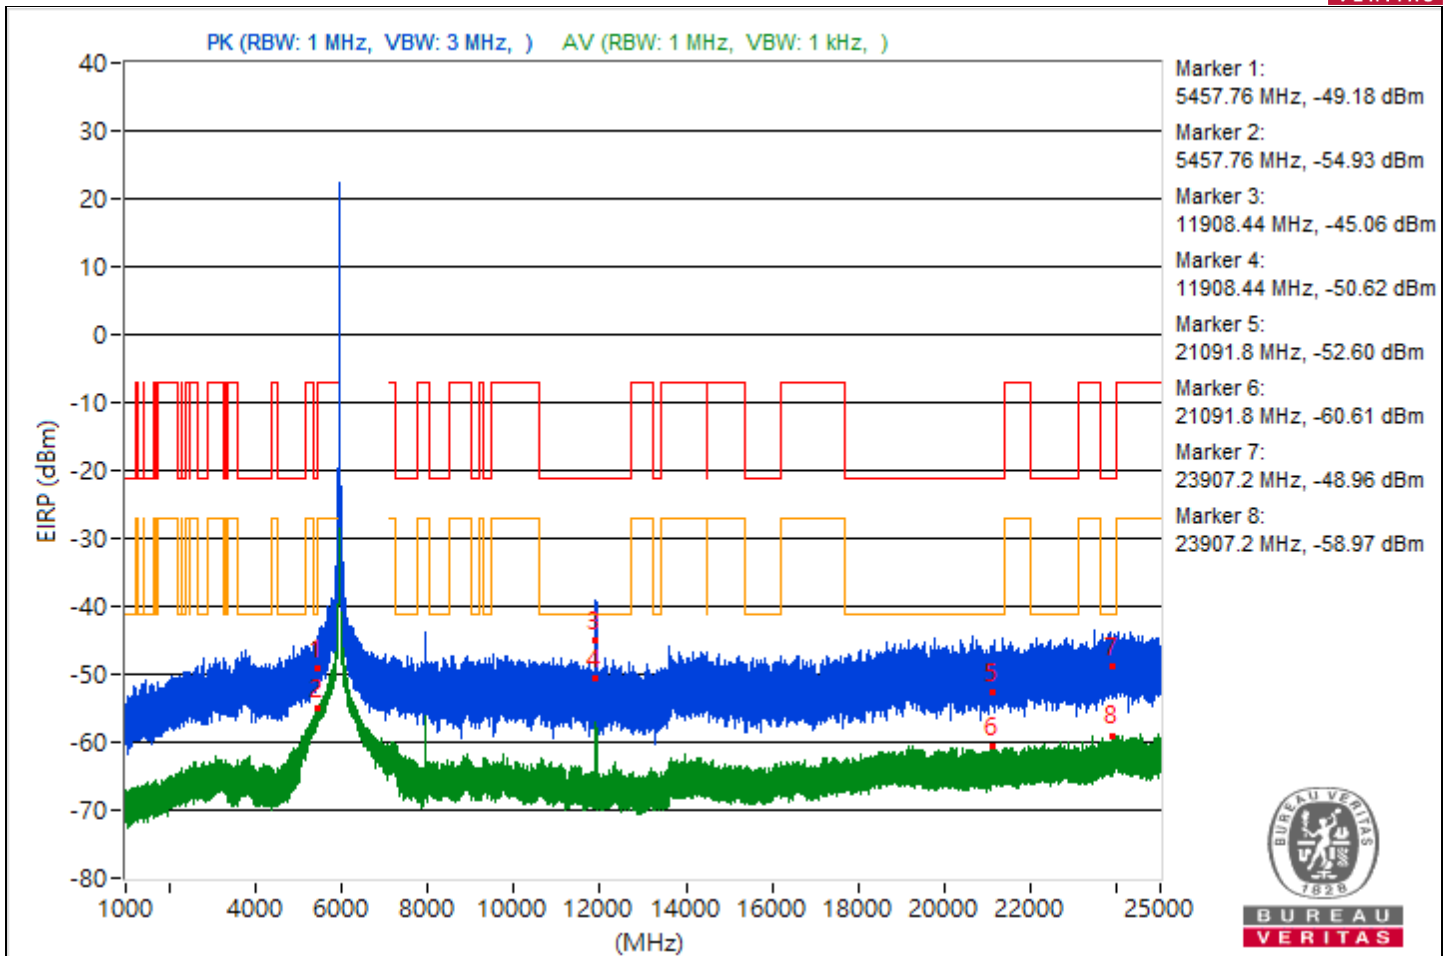


|                 |                |                          |                  |
|-----------------|----------------|--------------------------|------------------|
| RF Mode         | 802.11a        | Channel                  | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung    |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5455.42         | 46.49 PK                | 74             | -27.51      | -57.14                  | 8.37                   | -48.77           |
| 2                            | 5455.42         | 38.7 AV                 | 54             | -15.3       | -64.93                  | 8.37                   | -56.56           |
| 3                            | 12350.4         | 45.07 PK                | 74             | -28.93      | -58.56                  | 8.37                   | -50.19           |
| 4                            | 12350.4         | 38.45 AV                | 54             | -15.55      | -65.18                  | 8.37                   | -56.81           |
| 5                            | 19154           | 46.09 PK                | 74             | -27.91      | -57.54                  | 8.37                   | -49.17           |
| 6                            | 19154           | 34.88 AV                | 54             | -19.12      | -68.75                  | 8.37                   | -60.38           |
| 7                            | 23967.8         | 46.21 PK                | 74             | -27.79      | -57.42                  | 8.37                   | -49.05           |
| 8                            | 23967.8         | 36.31 AV                | 54             | -17.69      | -67.32                  | 8.37                   | -58.95           |
| 9                            | 39138.58        | 41.01 PK                | 74             | -32.99      | -62.62                  | 8.37                   | -54.25           |
| 10                           | 39138.58        | 30.99 AV                | 54             | -23.01      | -72.64                  | 8.37                   | -64.27           |

Note: Margin value = Emission Level - Limit value

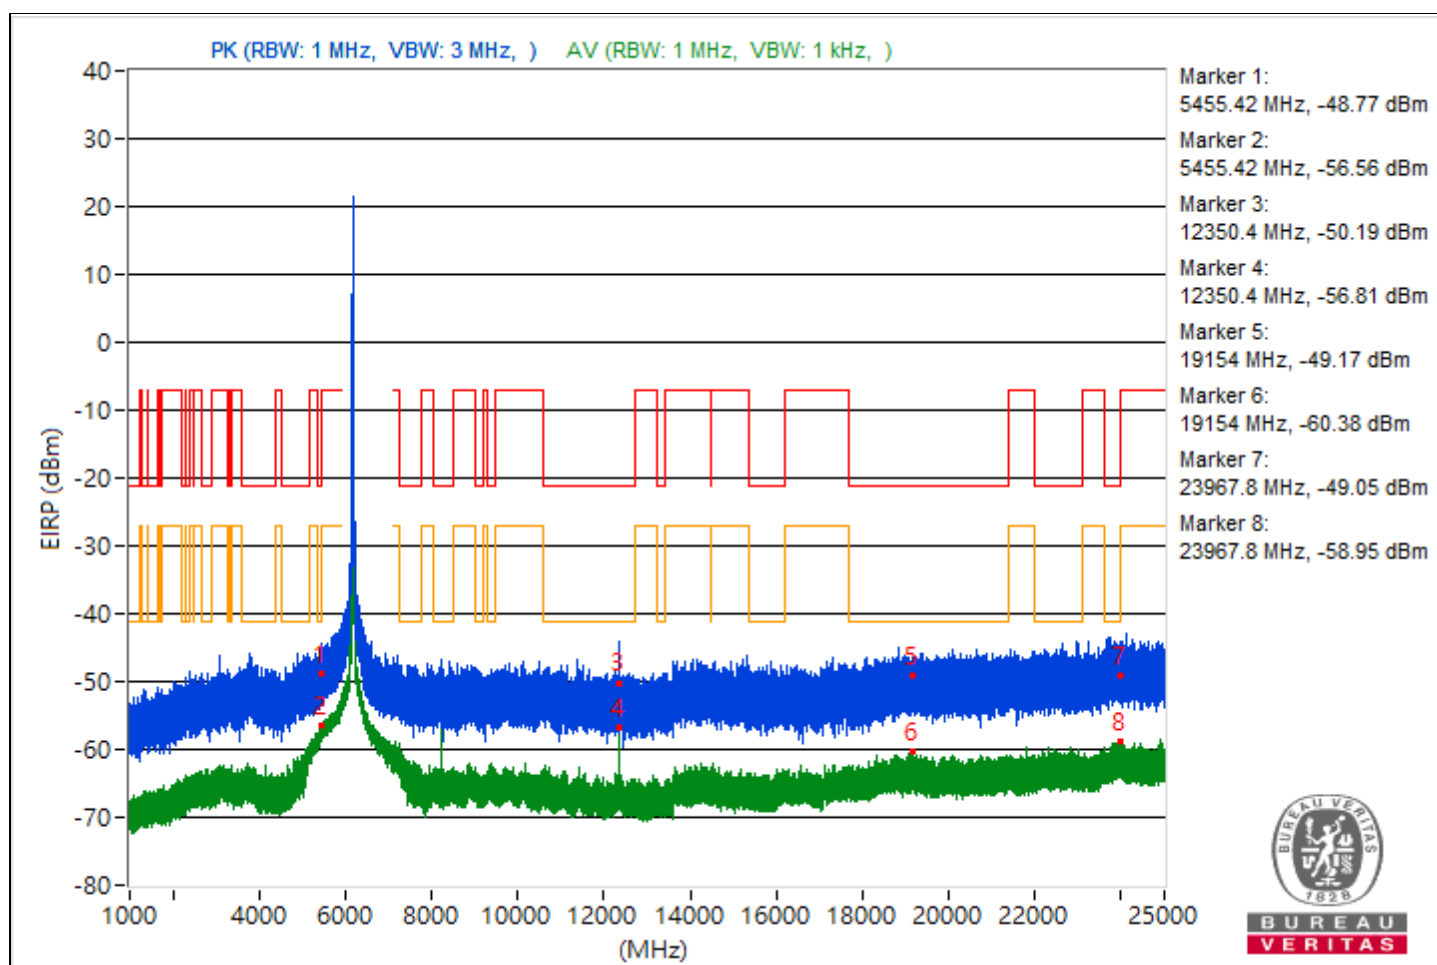


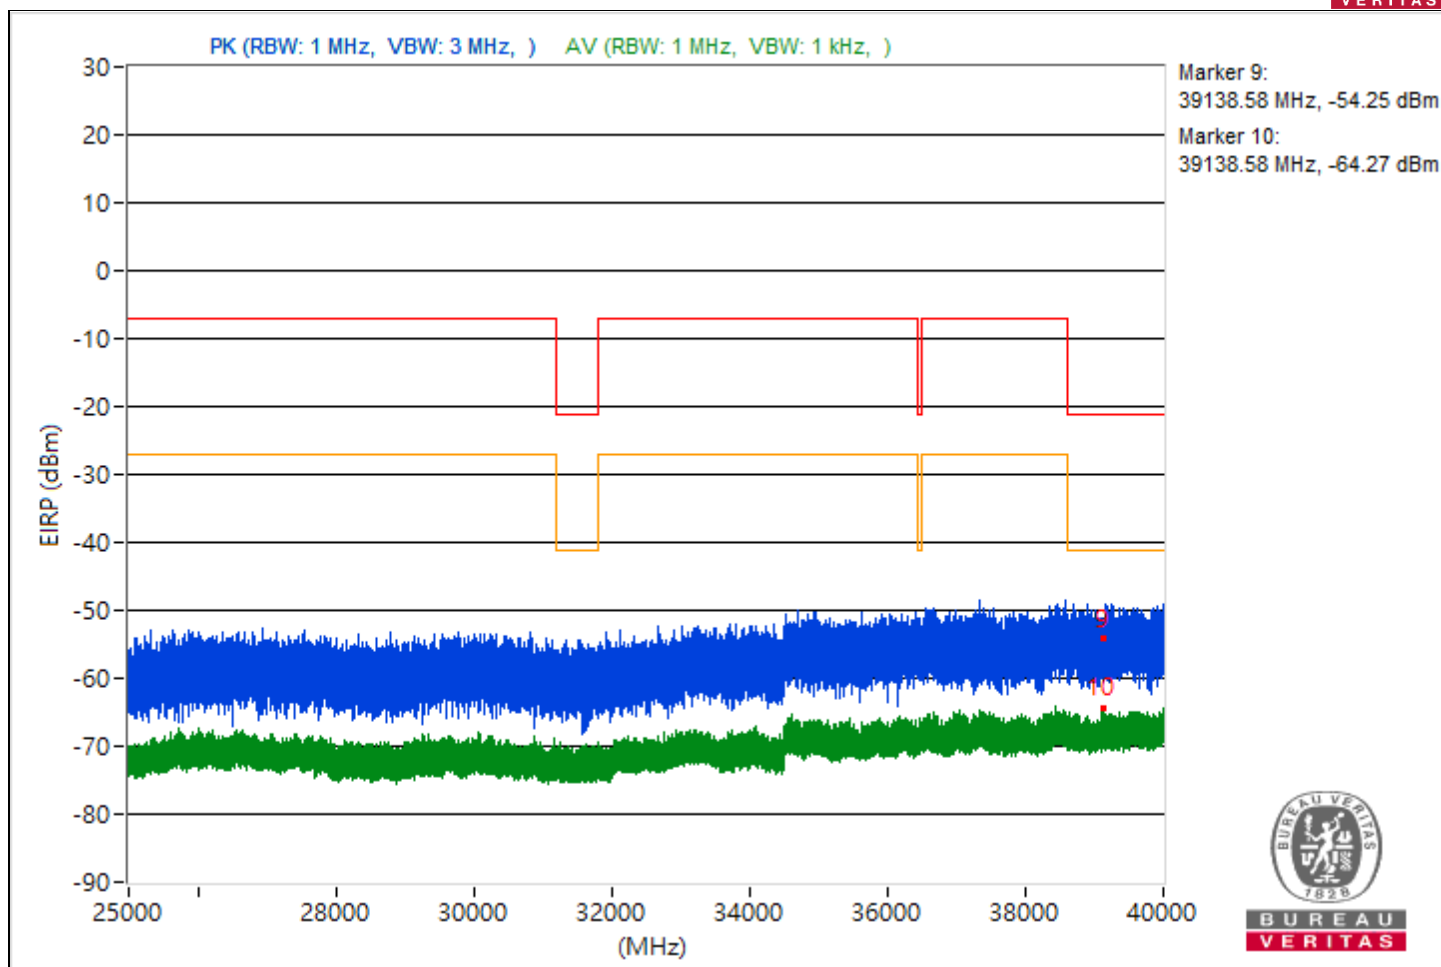


|                 |                |                          |                  |
|-----------------|----------------|--------------------------|------------------|
| RF Mode         | 802.11a        | Channel                  | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung    |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459.31         | 43.49 PK                | 74             | -30.51      | -60.14                  | 8.37                   | -51.77           |
| 2                            | 5459.31         | 37.82 AV                | 54             | -16.18      | -65.81                  | 8.37                   | -57.44           |
| 3                            | 7260.88         | 45.55 PK                | 74             | -28.45      | -58.08                  | 8.37                   | -49.71           |
| 4                            | 7260.88         | 36.53 AV                | 54             | -17.47      | -67.1                   | 8.37                   | -58.73           |
| 5                            | 19278.3         | 43.08 PK                | 74             | -30.92      | -60.55                  | 8.37                   | -52.18           |
| 6                            | 19278.3         | 34.96 AV                | 54             | -19.04      | -68.67                  | 8.37                   | -60.3            |
| 7                            | 23904.2         | 46.7 PK                 | 74             | -27.3       | -56.93                  | 8.37                   | -48.56           |
| 8                            | 23904.2         | 36.22 AV                | 54             | -17.78      | -67.41                  | 8.37                   | -59.04           |
| 9                            | 39639.73        | 42.44 PK                | 74             | -31.56      | -61.19                  | 8.37                   | -52.82           |
| 10                           | 39639.73        | 30.89 AV                | 54             | -23.11      | -72.74                  | 8.37                   | -64.37           |

Note: Margin value = Emission Level - Limit value

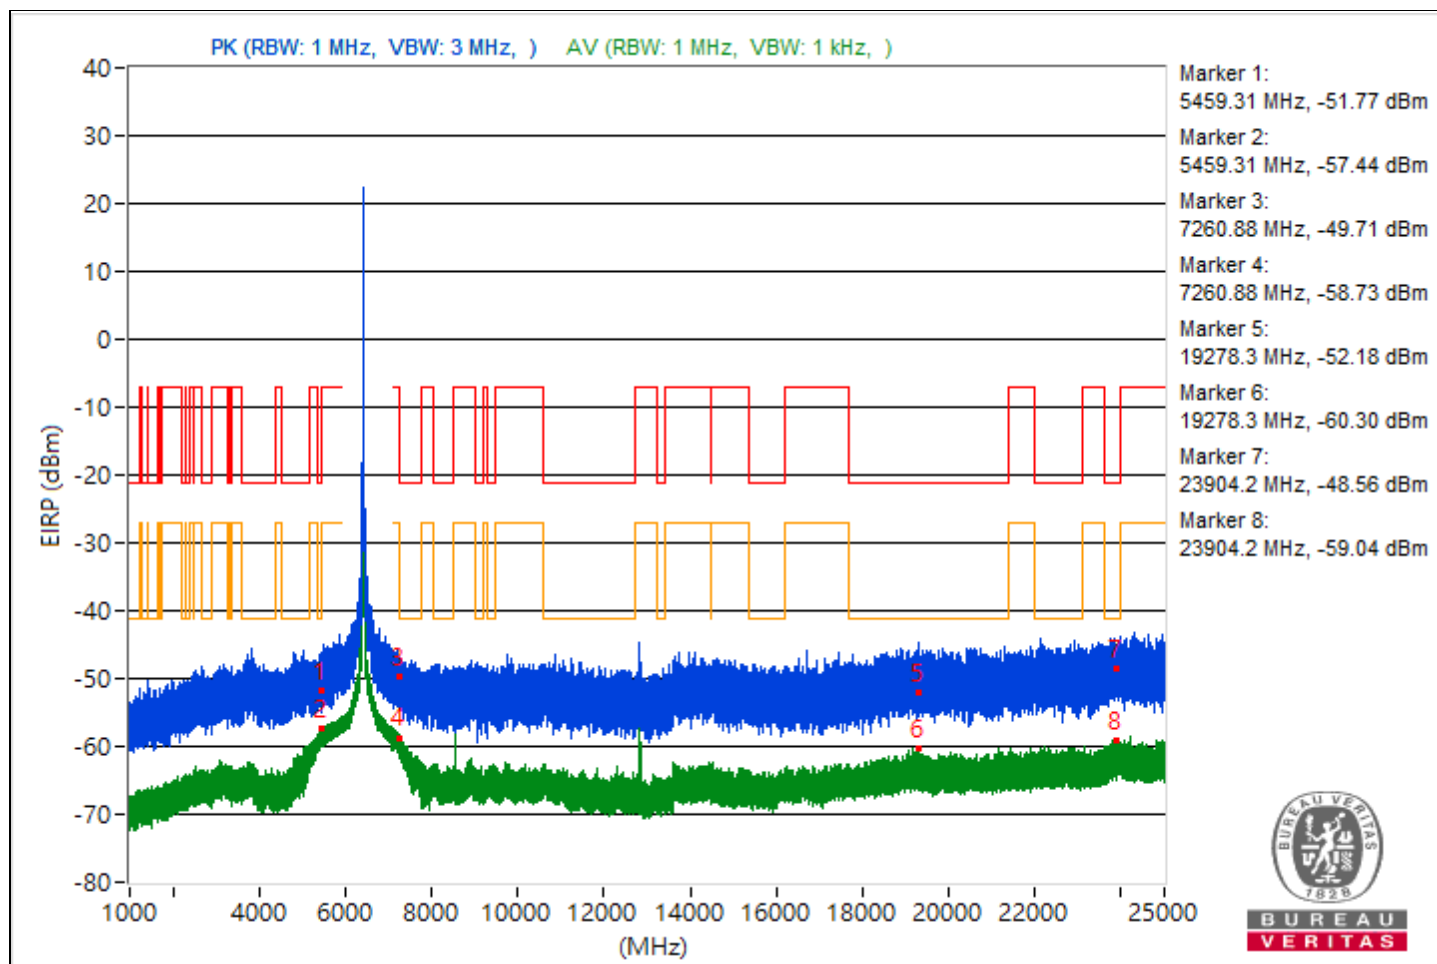


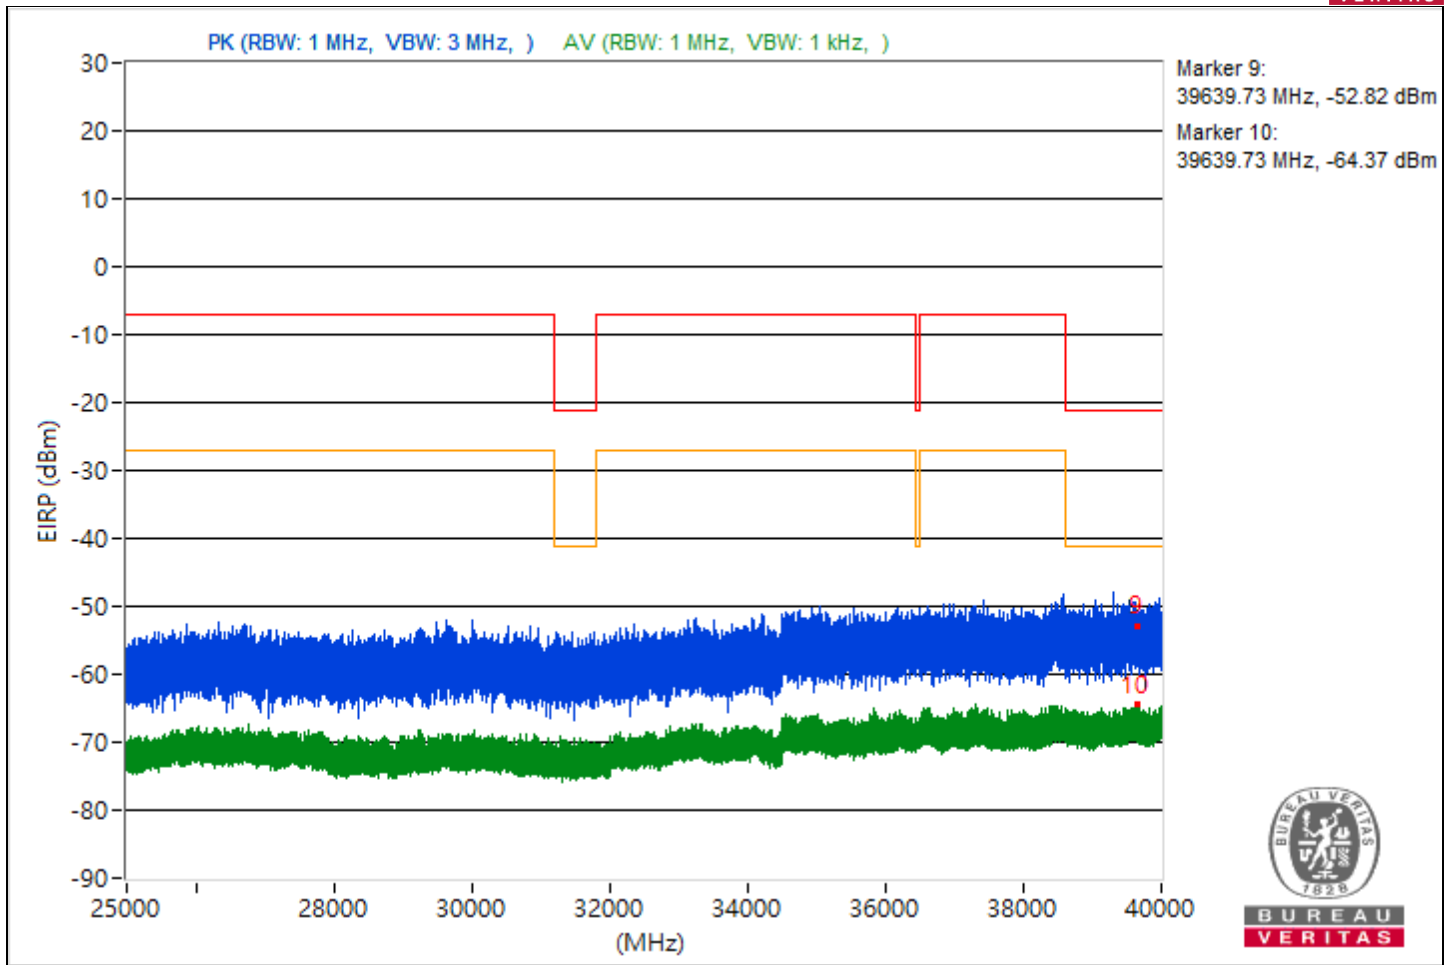


|                 |                |                          |                   |
|-----------------|----------------|--------------------------|-------------------|
| RF Mode         | 802.11a        | Channel                  | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5446.87         | 44.56 PK                | 74             | -29.44      | -59.07                  | 8.37                   | -50.7            |
| 2                            | 5446.87         | 37.68 AV                | 54             | -16.32      | -65.95                  | 8.37                   | -57.58           |
| 3                            | 7258.93         | 45.88 PK                | 74             | -28.12      | -57.75                  | 8.37                   | -49.38           |
| 4                            | 7258.93         | 37.46 AV                | 54             | -16.54      | -66.17                  | 8.37                   | -57.8            |
| 5                            | 20227.4         | 44.83 PK                | 74             | -29.17      | -58.8                   | 8.37                   | -50.43           |
| 6                            | 20227.4         | 35.05 AV                | 54             | -18.95      | -68.58                  | 8.37                   | -60.21           |
| 7                            | 23999.6         | 47.32 PK                | 74             | -26.68      | -56.31                  | 8.37                   | -47.94           |
| 8                            | 23999.6         | 37.27 AV                | 54             | -16.73      | -66.36                  | 8.37                   | -57.99           |
| 9                            | 39540.09        | 42.93 PK                | 74             | -31.07      | -60.7                   | 8.37                   | -52.33           |
| 10                           | 39540.09        | 31.04 AV                | 54             | -22.96      | -72.59                  | 8.37                   | -64.22           |

Note: Margin value = Emission Level - Limit value

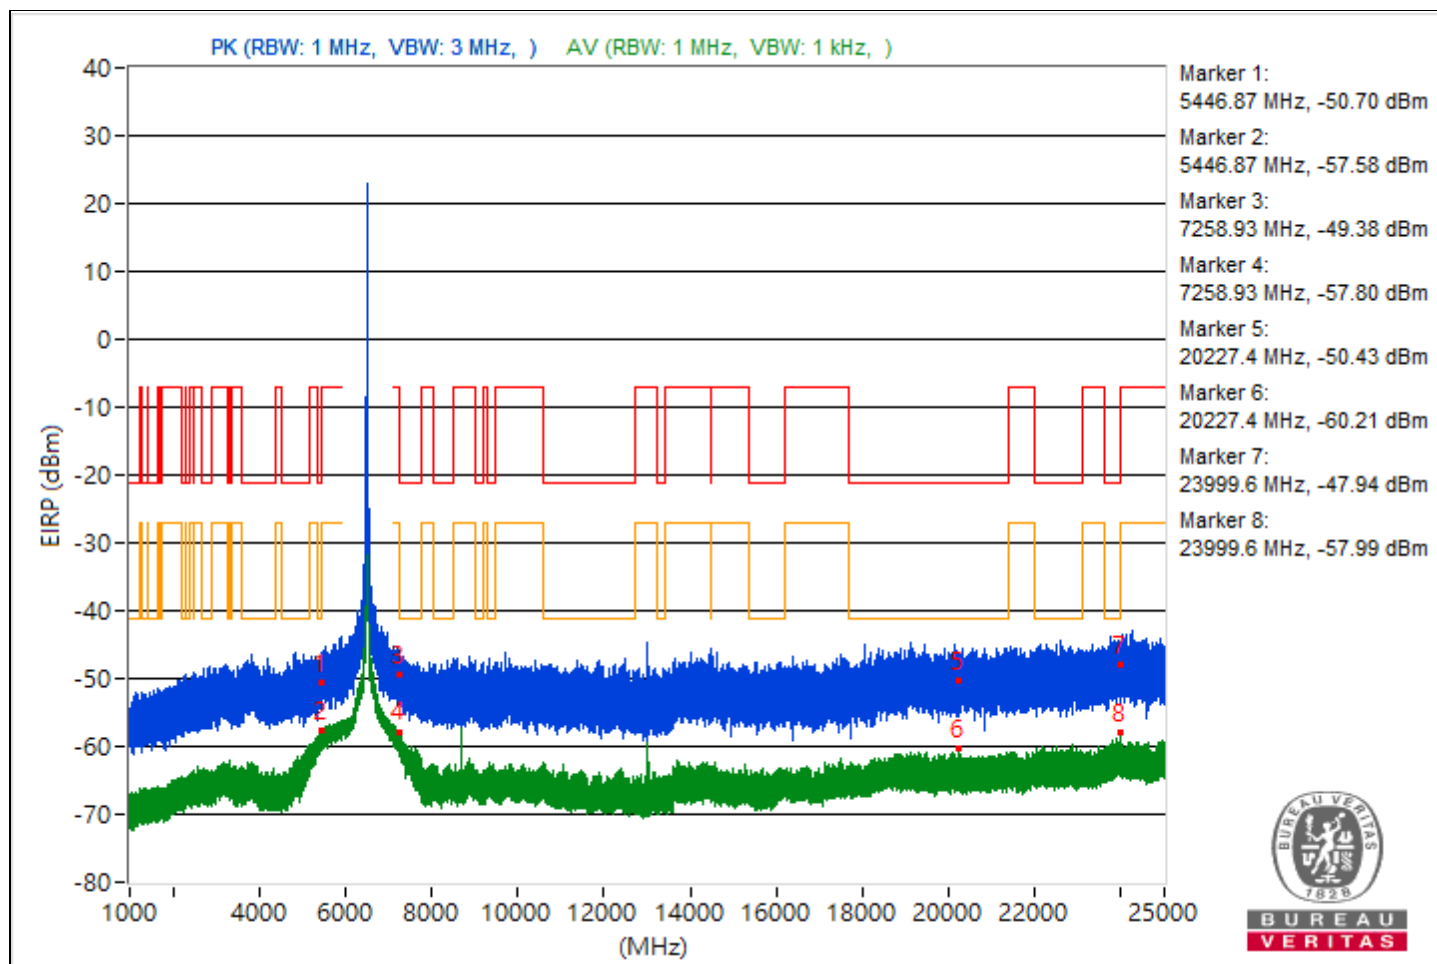


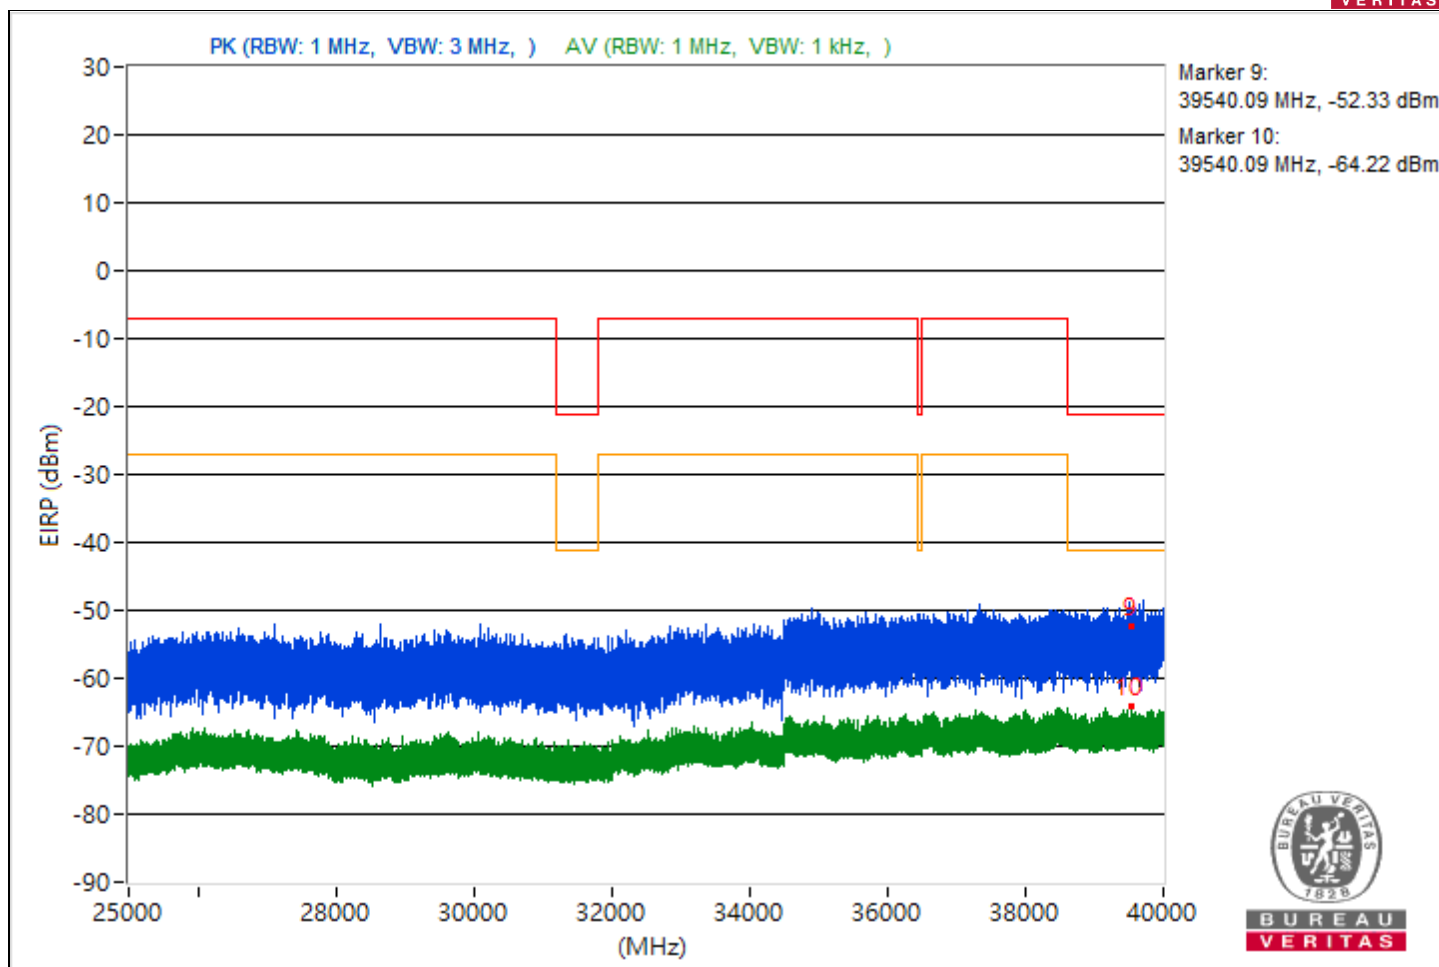


|                 |                |                          |                   |
|-----------------|----------------|--------------------------|-------------------|
| RF Mode         | 802.11a        | Channel                  | CH 149 : 6695 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5437.14         | 48.64 PK                | 74             | -25.36      | -54.99                  | 8.37                   | -46.62           |
| 2                            | 5437.14         | 36.61 AV                | 54             | -17.39      | -67.02                  | 8.37                   | -58.65           |
| 3                            | 13390.58        | 52.84 PK                | 74             | -21.16      | -50.79                  | 8.37                   | -42.42           |
| 4                            | 13390.58        | 43.98 AV                | 54             | -10.02      | -59.65                  | 8.37                   | -51.28           |
| 5                            | 20090           | 46.54 PK                | 74             | -27.46      | -57.09                  | 8.37                   | -48.72           |
| 6                            | 20090           | 37.15 AV                | 54             | -16.85      | -66.48                  | 8.37                   | -58.11           |
| 7                            | 23845.9         | 47.87 PK                | 74             | -26.13      | -55.76                  | 8.37                   | -47.39           |
| 8                            | 23845.9         | 35.84 AV                | 54             | -18.16      | -67.79                  | 8.37                   | -59.42           |
| 9                            | 39639.11        | 40.15 PK                | 74             | -33.85      | -63.48                  | 8.37                   | -55.11           |
| 10                           | 39639.11        | 30.81 AV                | 54             | -23.19      | -72.82                  | 8.37                   | -64.45           |

Note: Margin value = Emission Level - Limit value

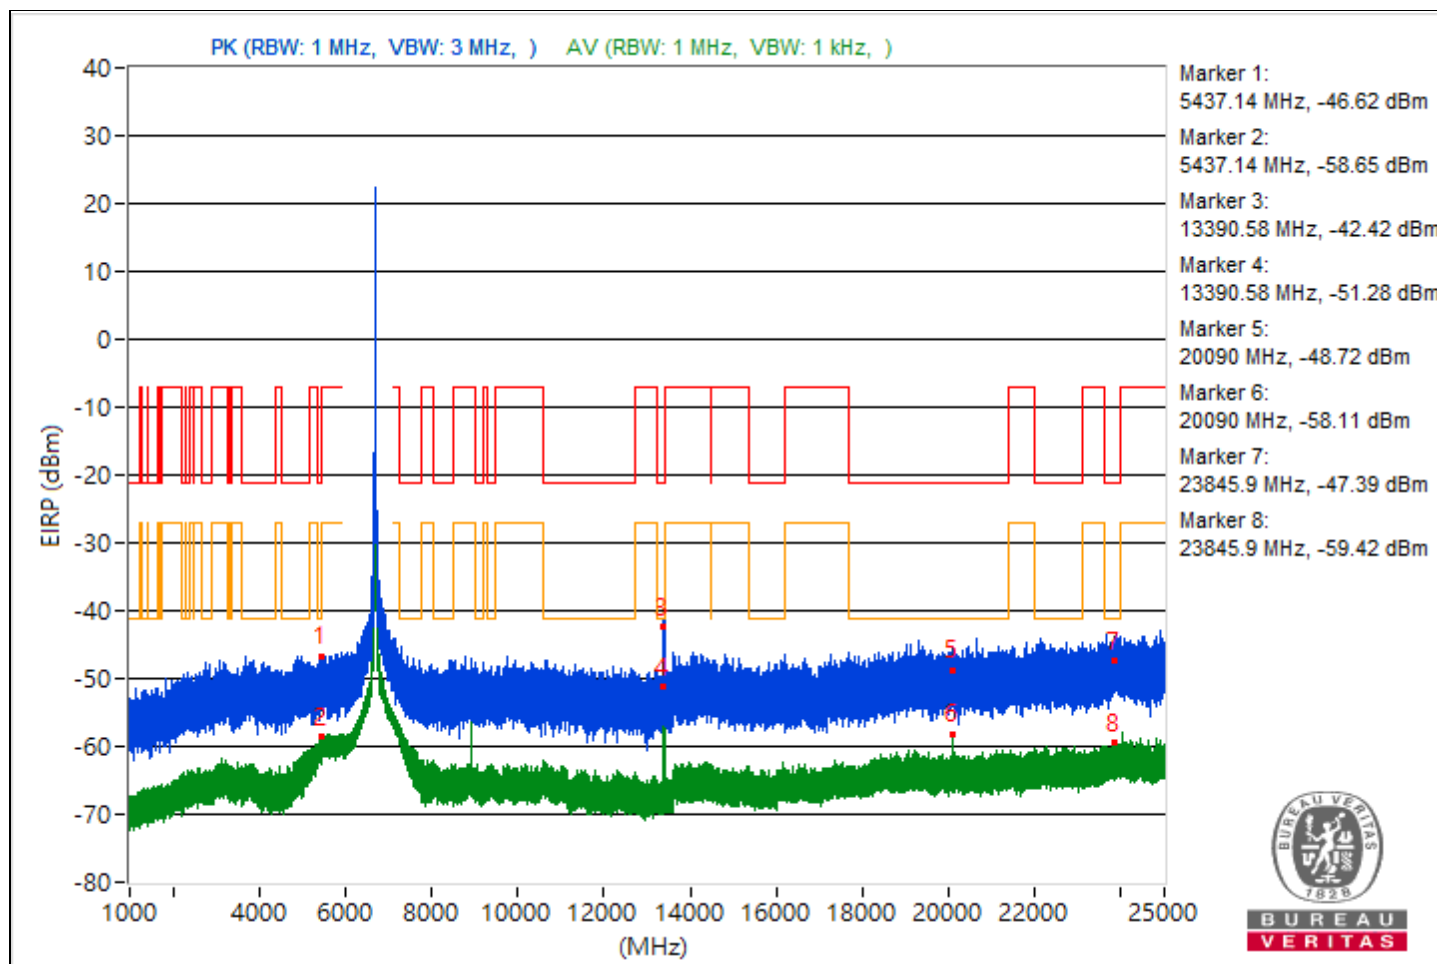


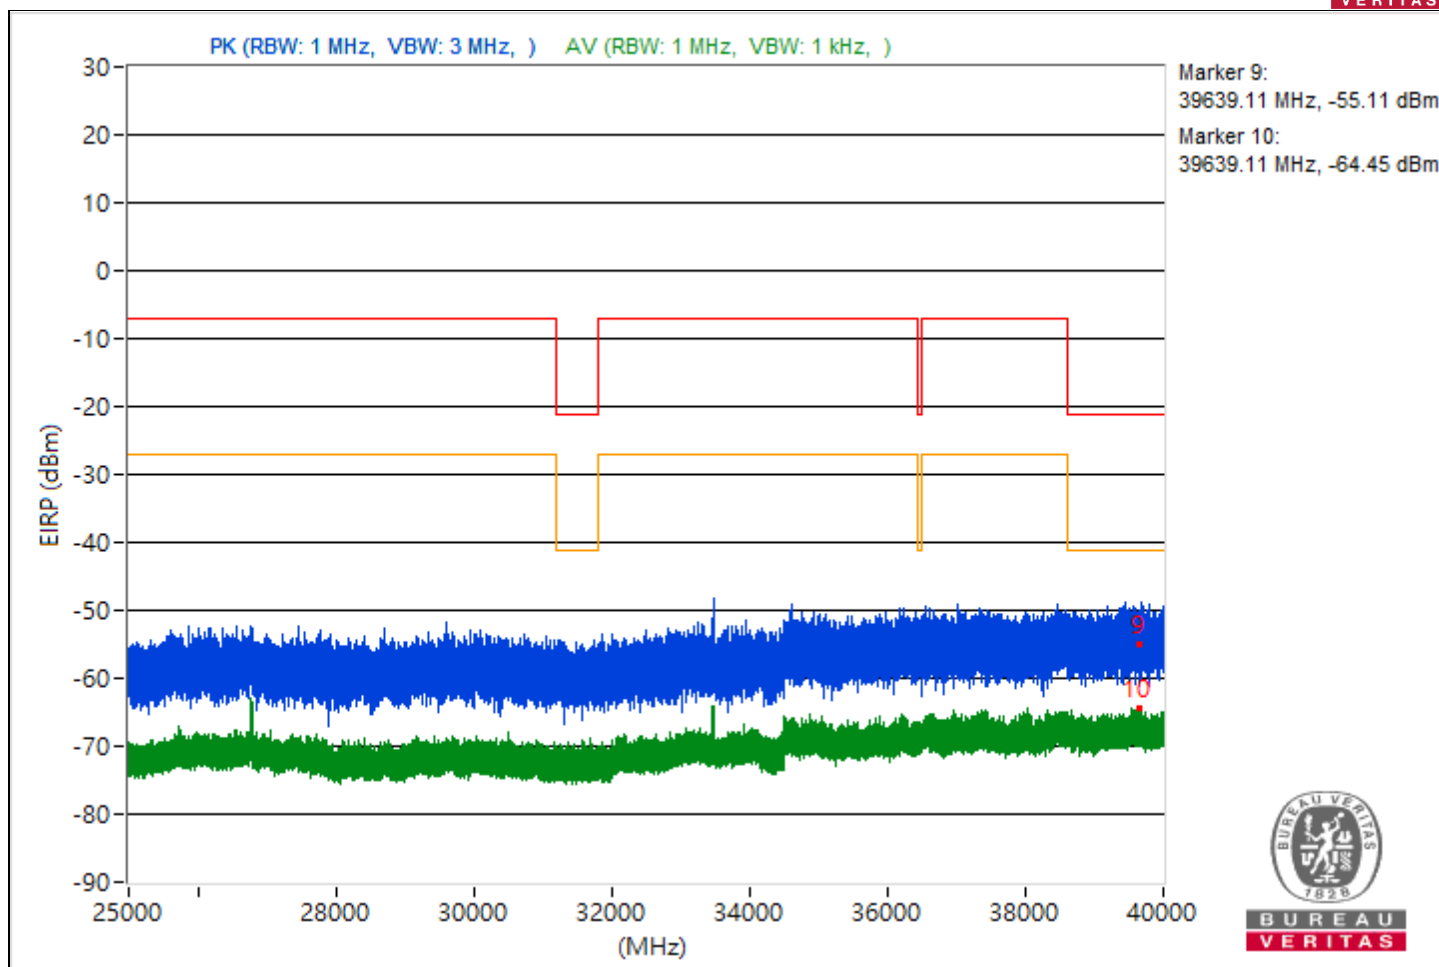


|                 |                |                          |                   |
|-----------------|----------------|--------------------------|-------------------|
| RF Mode         | 802.11a        | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5458.77         | 43.66 PK                | 74             | -30.34      | -59.97                  | 8.37                   | -51.6            |
| 2                            | 5458.77         | 35.85 AV                | 54             | -18.15      | -67.78                  | 8.37                   | -59.41           |
| 3                            | 7258.7          | 48.62 PK                | 74             | -25.38      | -55.01                  | 8.37                   | -46.64           |
| 4                            | 7258.7          | 39.84 AV                | 54             | -14.16      | -63.79                  | 8.37                   | -55.42           |
| 5                            | 20569.4         | 46.7 PK                 | 74             | -27.3       | -56.93                  | 8.37                   | -48.56           |
| 6                            | 20569.4         | 36.81 AV                | 54             | -17.19      | -66.82                  | 8.37                   | -58.45           |
| 7                            | 23928.7         | 48.52 PK                | 74             | -25.48      | -55.11                  | 8.37                   | -46.74           |
| 8                            | 23928.7         | 36.11 AV                | 54             | -17.89      | -67.52                  | 8.37                   | -59.15           |
| 9                            | 39881.87        | 42.05 PK                | 74             | -31.95      | -61.58                  | 8.37                   | -53.21           |
| 10                           | 39881.87        | 31.28 AV                | 54             | -22.72      | -72.35                  | 8.37                   | -63.98           |

Note: Margin value = Emission Level - Limit value

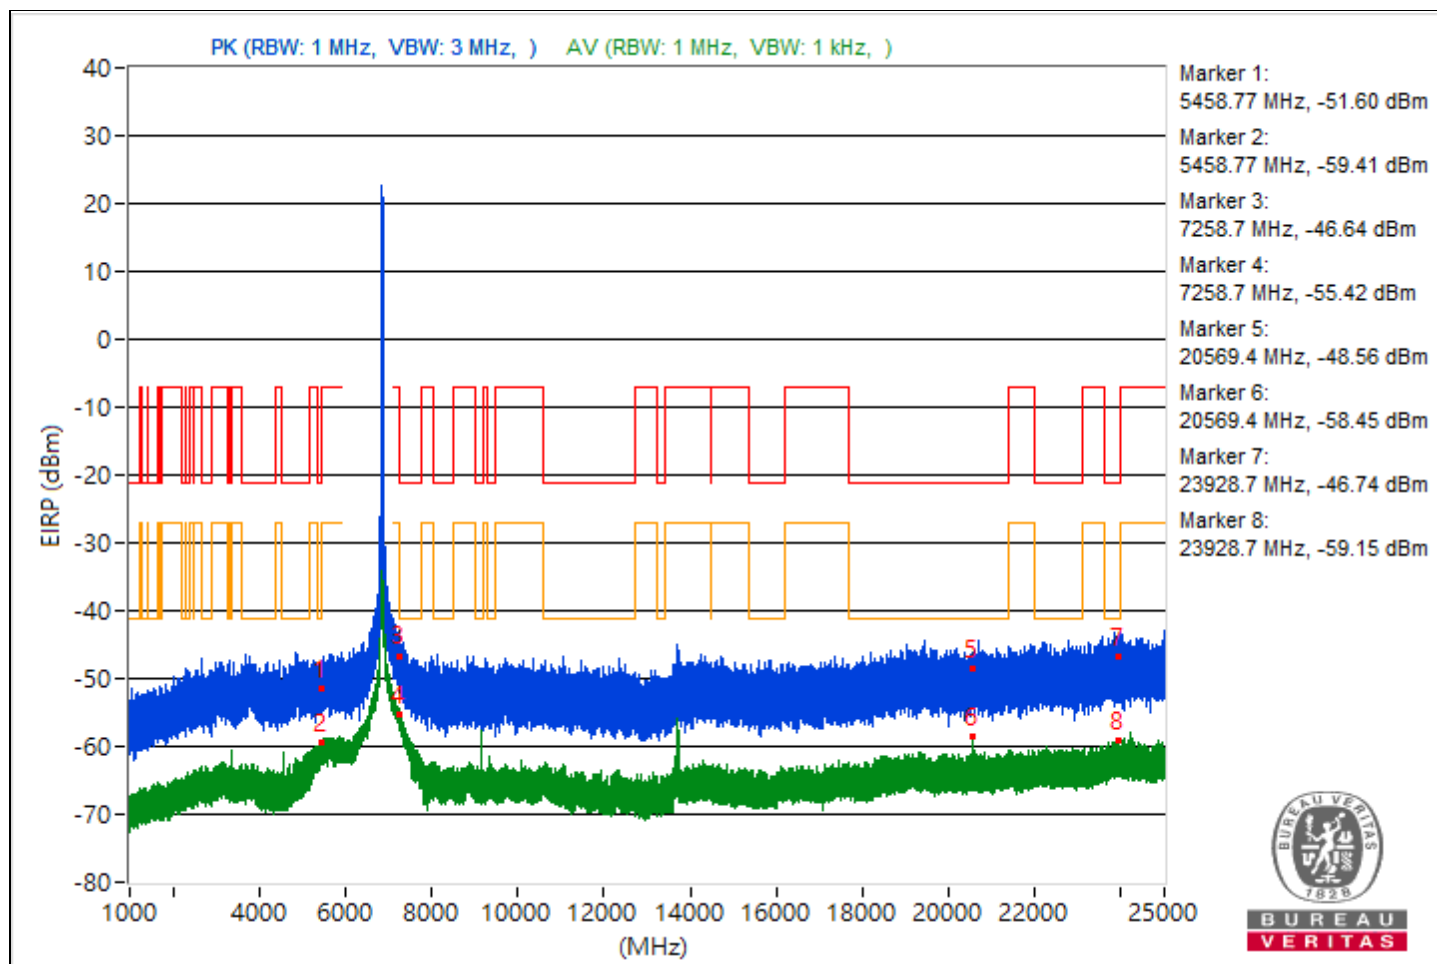

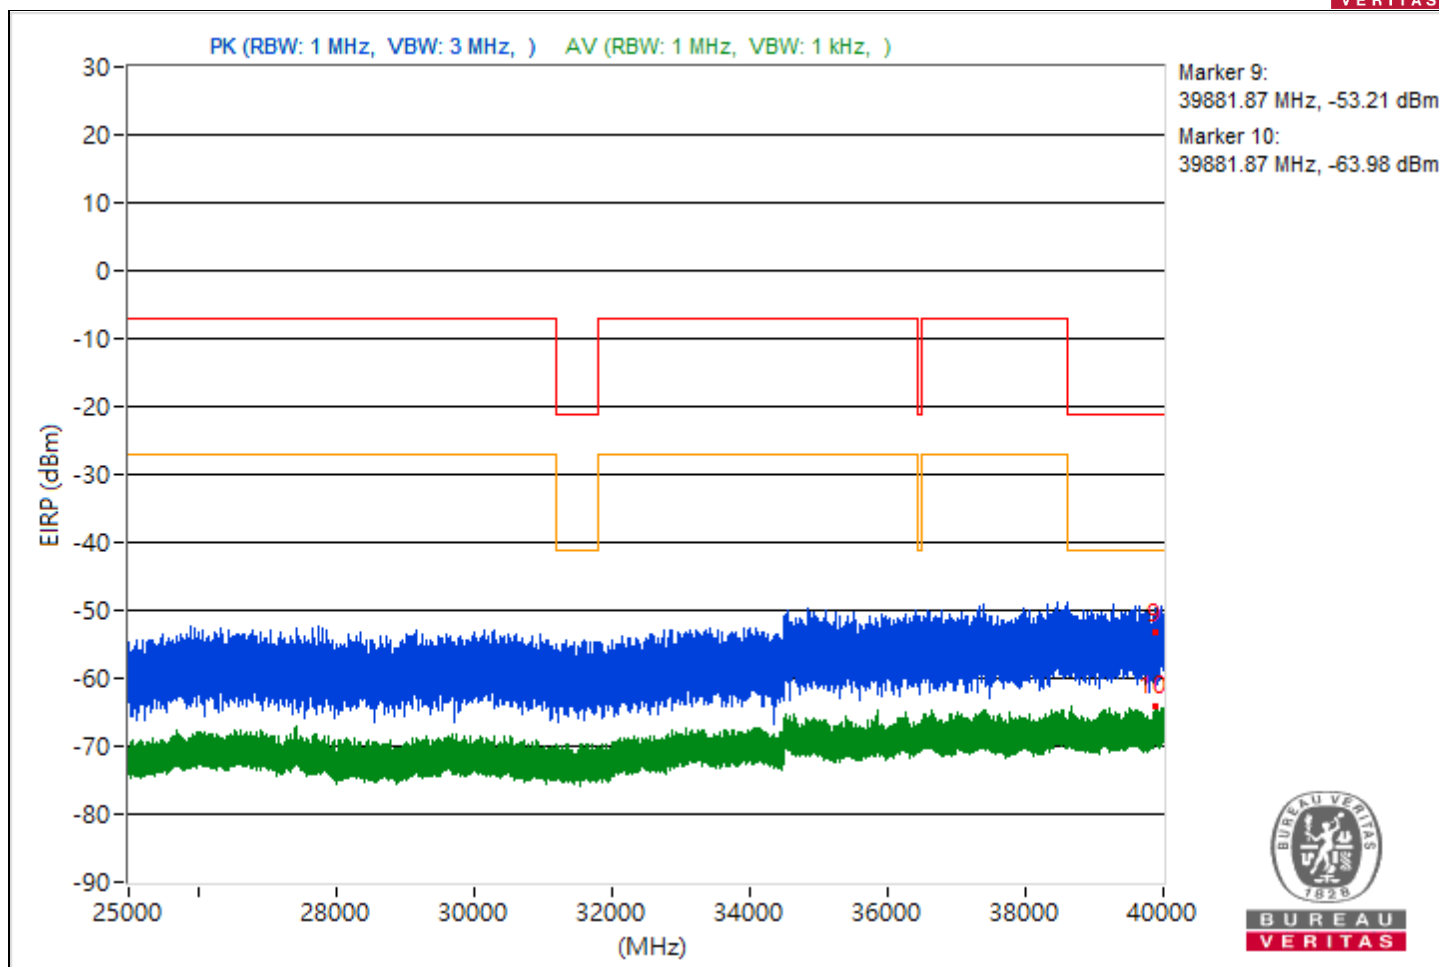



# 1S1T

|                 |                  |                          |                 |
|-----------------|------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung      |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5458.84         | 47.68 PK                | 74             | -26.32      | -55.95                  | 8.37                   | -47.58           |
| 2                            | 5458.84         | 39.98 AV                | 54             | -14.02      | -63.65                  | 8.37                   | -55.28           |
| 3                            | 11909.96        | 48.85 PK                | 74             | -25.15      | -54.78                  | 8.37                   | -46.41           |
| 4                            | 11909.96        | 44.18 AV                | 54             | -9.82       | -59.45                  | 8.37                   | -51.08           |
| 5                            | 19870.1         | 43.93 PK                | 74             | -30.07      | -59.7                   | 8.37                   | -51.33           |
| 6                            | 19870.1         | 34.91 AV                | 54             | -19.09      | -68.72                  | 8.37                   | -60.35           |
| 7                            | 23974.7         | 48.26 PK                | 74             | -25.74      | -55.37                  | 8.37                   | -47              |
| 8                            | 23974.7         | 36.37 AV                | 54             | -17.63      | -67.26                  | 8.37                   | -58.89           |
| 9                            | 39553.69        | 39.68 PK                | 74             | -34.32      | -63.95                  | 8.37                   | -55.58           |
| 10                           | 39553.69        | 30.66 AV                | 54             | -23.34      | -72.97                  | 8.37                   | -64.6            |

Note: Margin value = Emission Level - Limit value

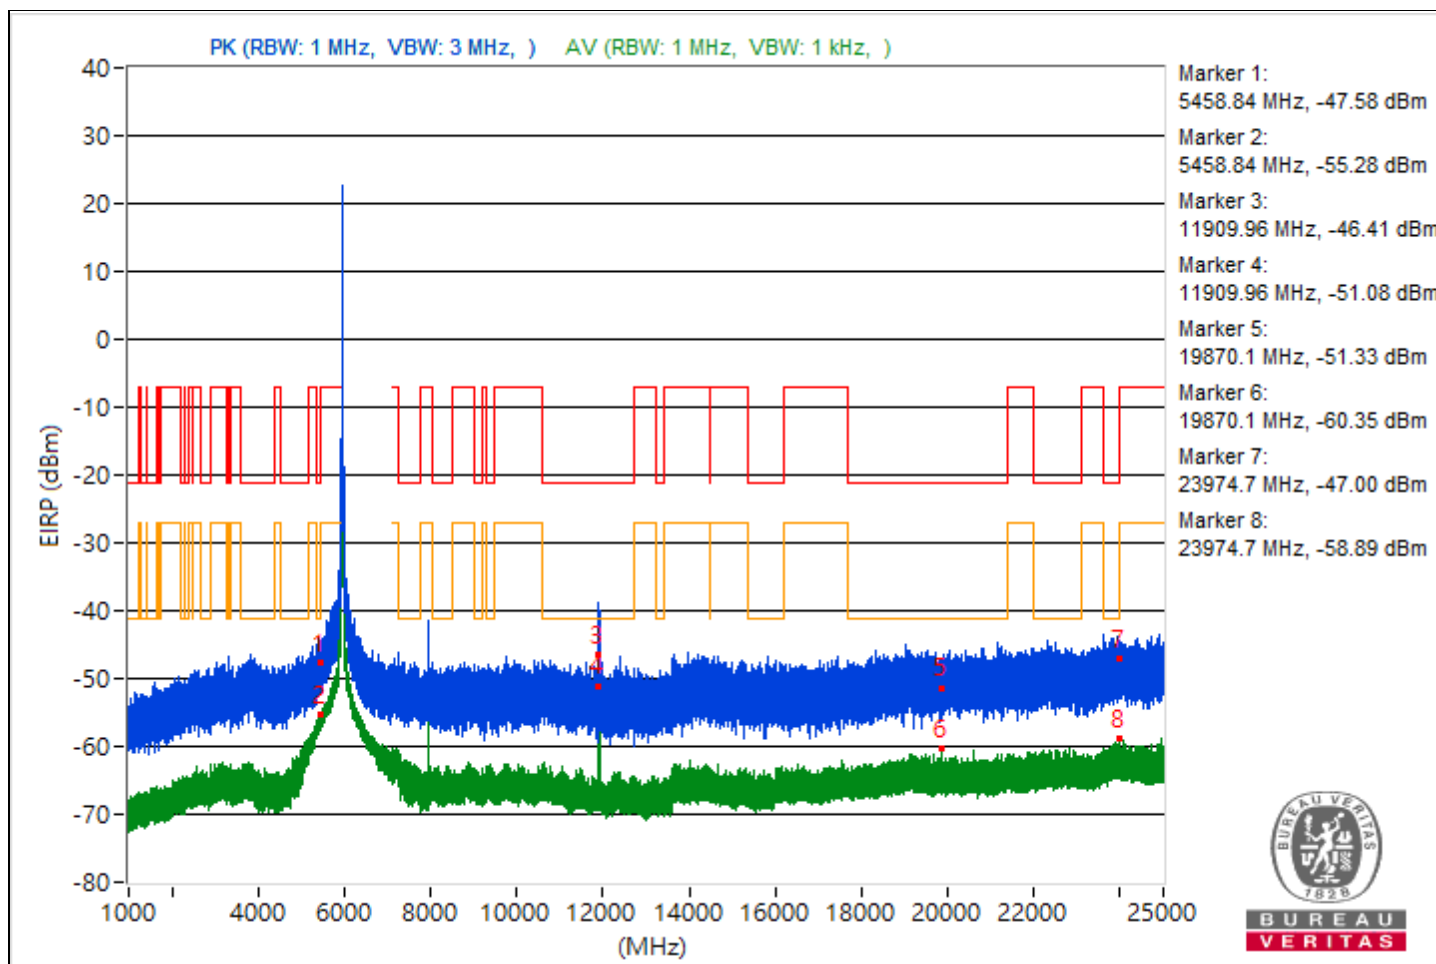


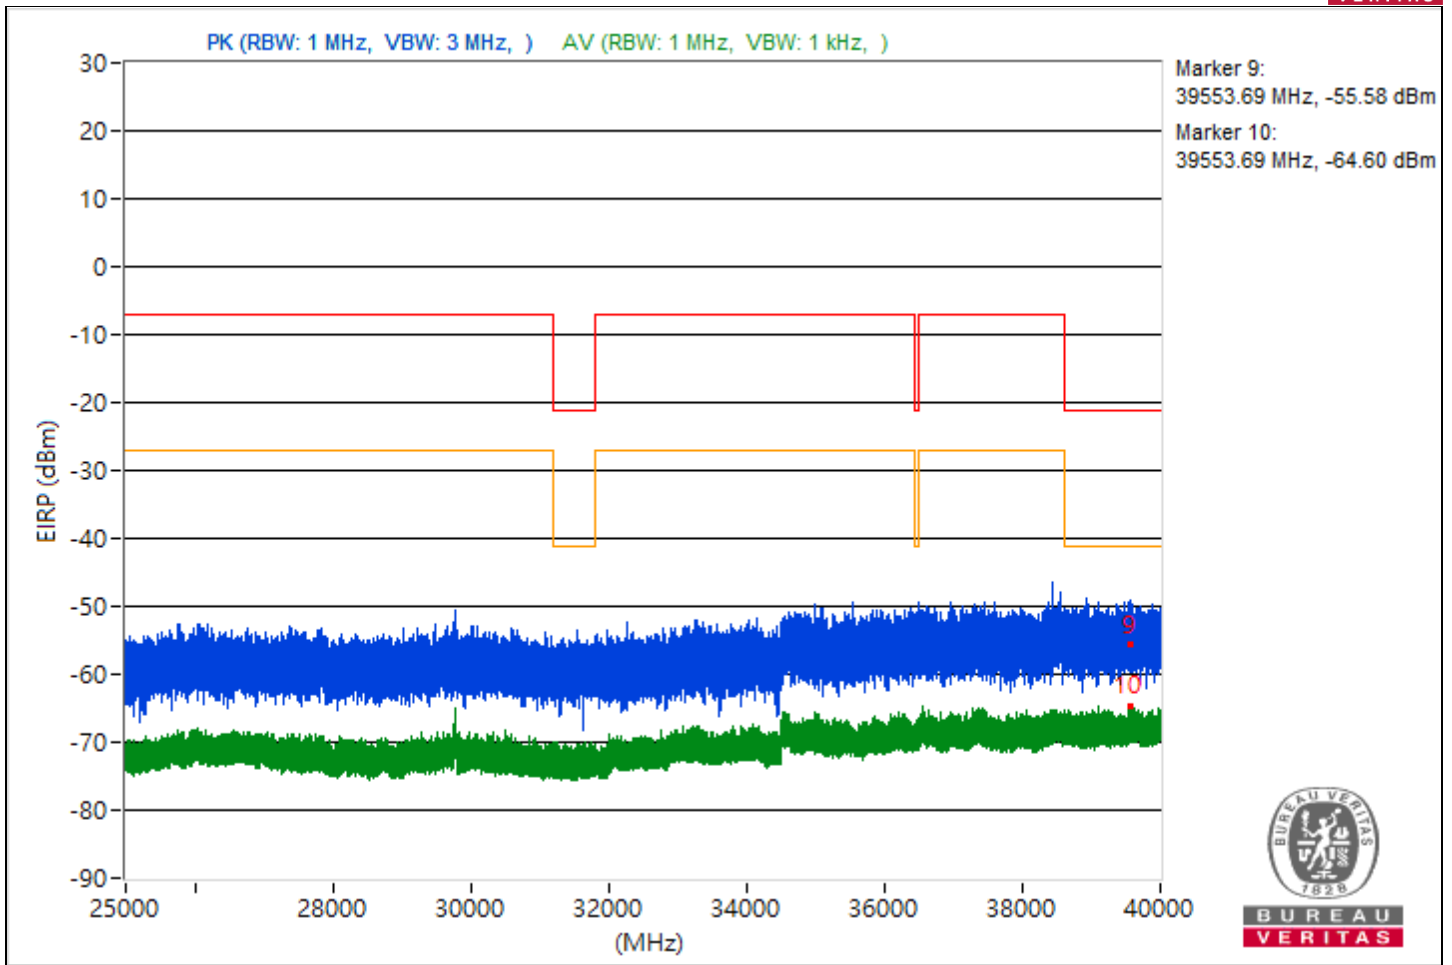


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung      |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459.16         | 45.13 PK                | 74             | -28.87      | -58.5                   | 8.37                   | -50.13           |
| 2                            | 5459.16         | 38.41 AV                | 54             | -15.59      | -65.22                  | 8.37                   | -56.85           |
| 3                            | 8233.24         | 50.22 PK                | 74             | -23.78      | -53.41                  | 8.37                   | -45.04           |
| 4                            | 8233.24         | 47.78 AV                | 54             | -6.22       | -55.85                  | 8.37                   | -47.48           |
| 5                            | 19358           | 46.99 PK                | 74             | -27.01      | -56.64                  | 8.37                   | -48.27           |
| 6                            | 19358           | 34.72 AV                | 54             | -19.28      | -68.91                  | 8.37                   | -60.54           |
| 7                            | 23965.1         | 45.27 PK                | 74             | -28.73      | -58.36                  | 8.37                   | -49.99           |
| 8                            | 23965.1         | 36.45 AV                | 54             | -17.55      | -67.18                  | 8.37                   | -58.81           |
| 9                            | 39729.33        | 40.29 PK                | 74             | -33.71      | -63.34                  | 8.37                   | -54.97           |
| 10                           | 39729.33        | 30.52 AV                | 54             | -23.48      | -73.11                  | 8.37                   | -64.74           |

Note: Margin value = Emission Level - Limit value

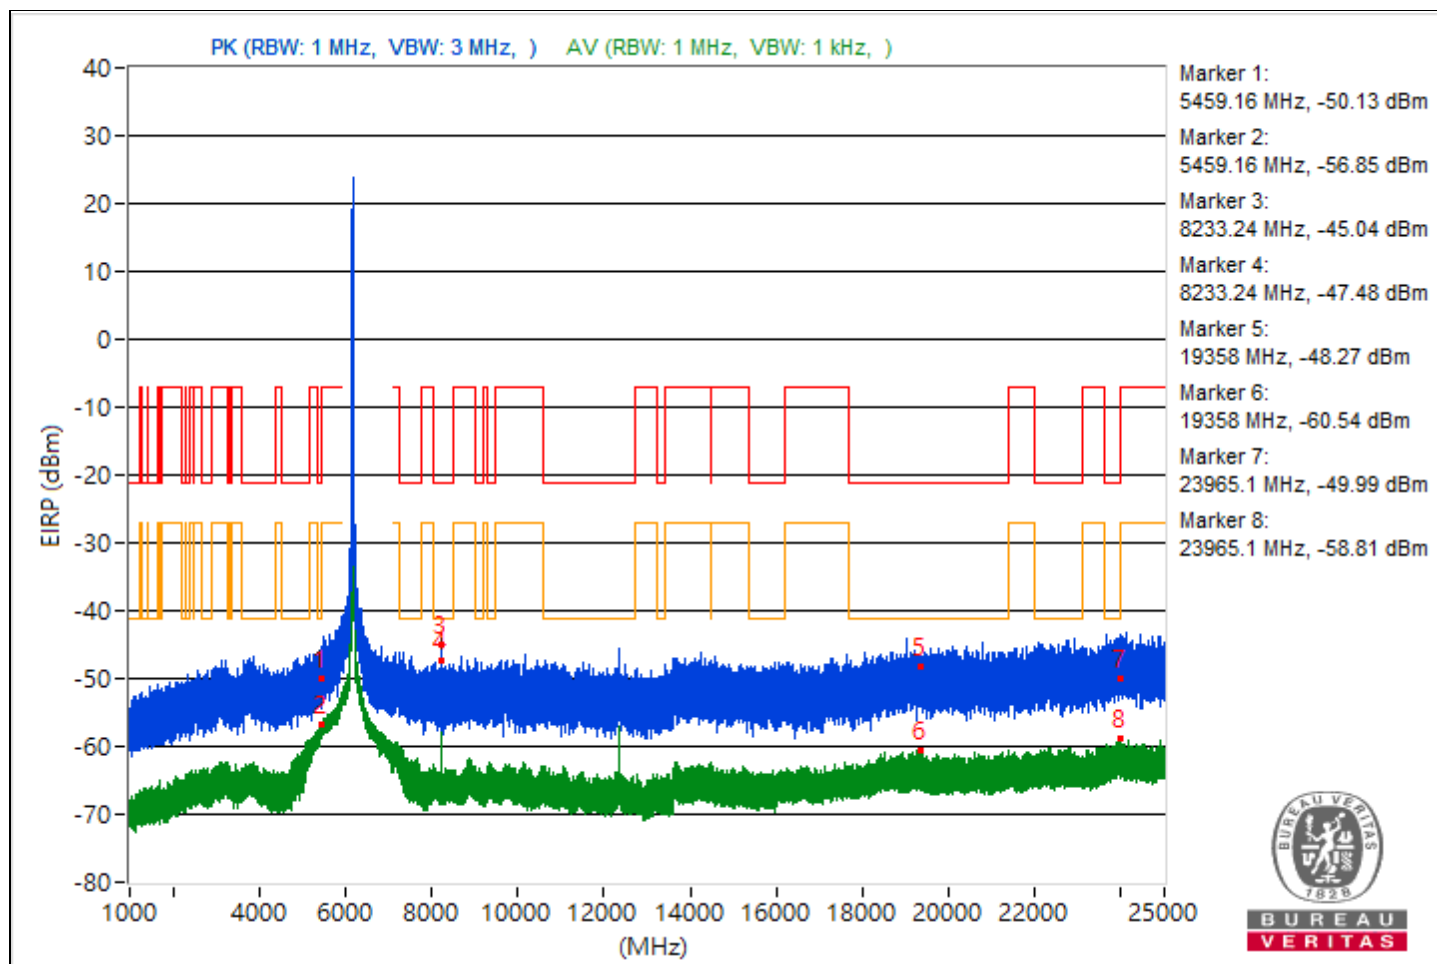


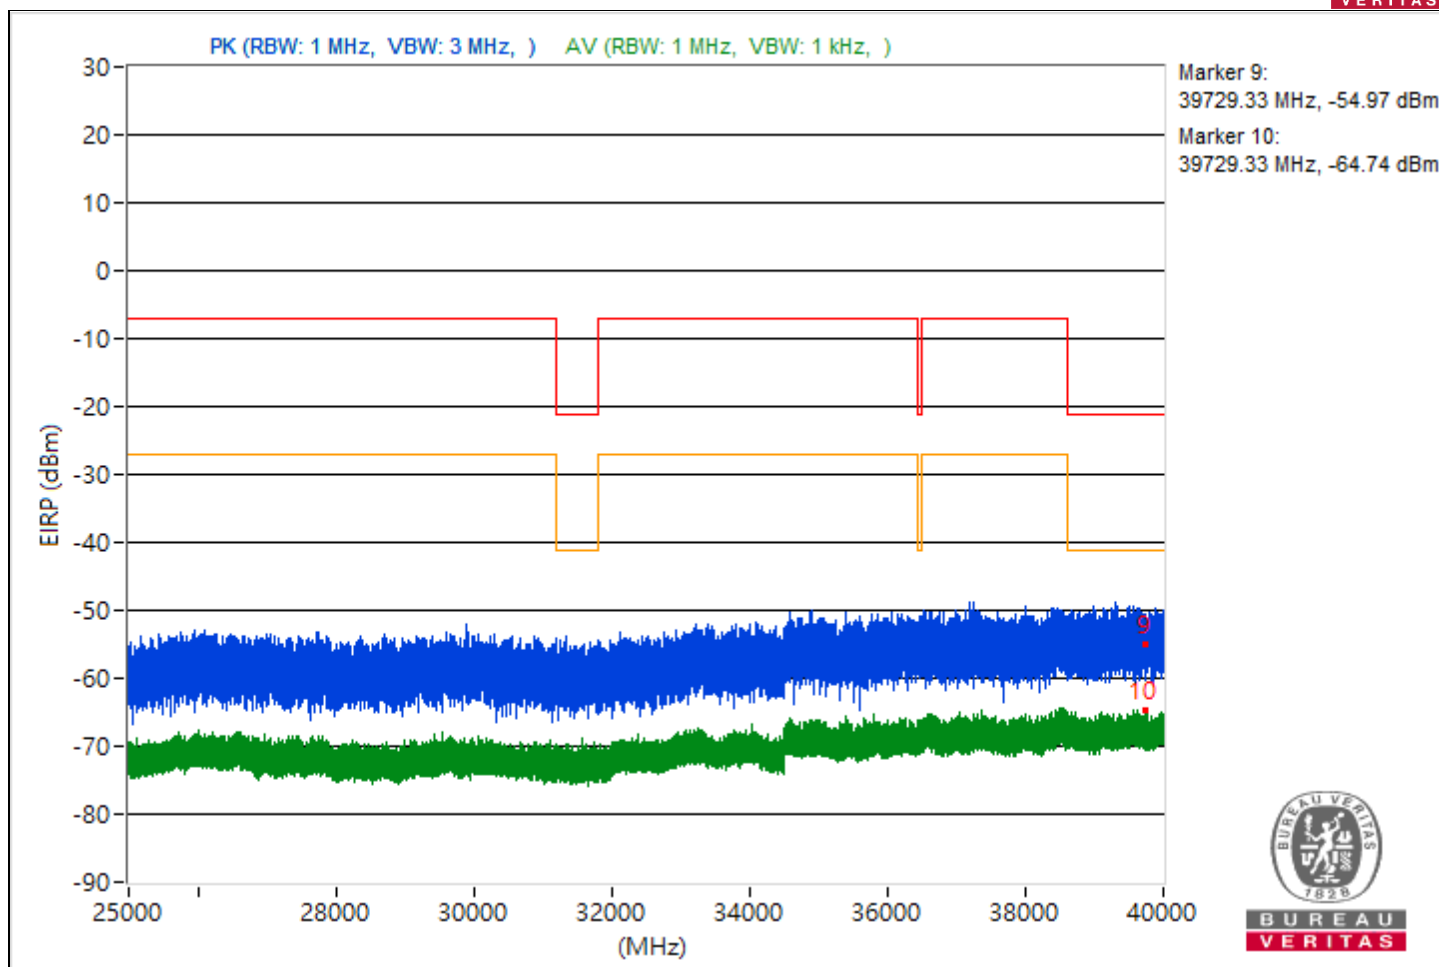


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung      |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5446.79         | 46.04 PK                | 74             | -27.96      | -57.59                  | 8.37                   | -49.22           |
| 2                            | 5446.79         | 37.63 AV                | 54             | -16.37      | -66                     | 8.37                   | -57.63           |
| 3                            | 7263.83         | 46.13 PK                | 74             | -27.87      | -57.5                   | 8.37                   | -49.13           |
| 4                            | 7263.83         | 36.29 AV                | 54             | -17.71      | -67.34                  | 8.37                   | -58.97           |
| 5                            | 18786.2         | 42.72 PK                | 74             | -31.28      | -60.91                  | 8.37                   | -52.54           |
| 6                            | 18786.2         | 34.39 AV                | 54             | -19.61      | -69.24                  | 8.37                   | -60.87           |
| 7                            | 23908.5         | 48.19 PK                | 74             | -25.81      | -55.44                  | 8.37                   | -47.07           |
| 8                            | 23908.5         | 36.03 AV                | 54             | -17.97      | -67.6                   | 8.37                   | -59.23           |
| 9                            | 39941.33        | 38.06 PK                | 74             | -35.94      | -65.57                  | 8.37                   | -57.2            |
| 10                           | 39941.33        | 30.67 AV                | 54             | -23.33      | -72.96                  | 8.37                   | -64.59           |

Note: Margin value = Emission Level - Limit value

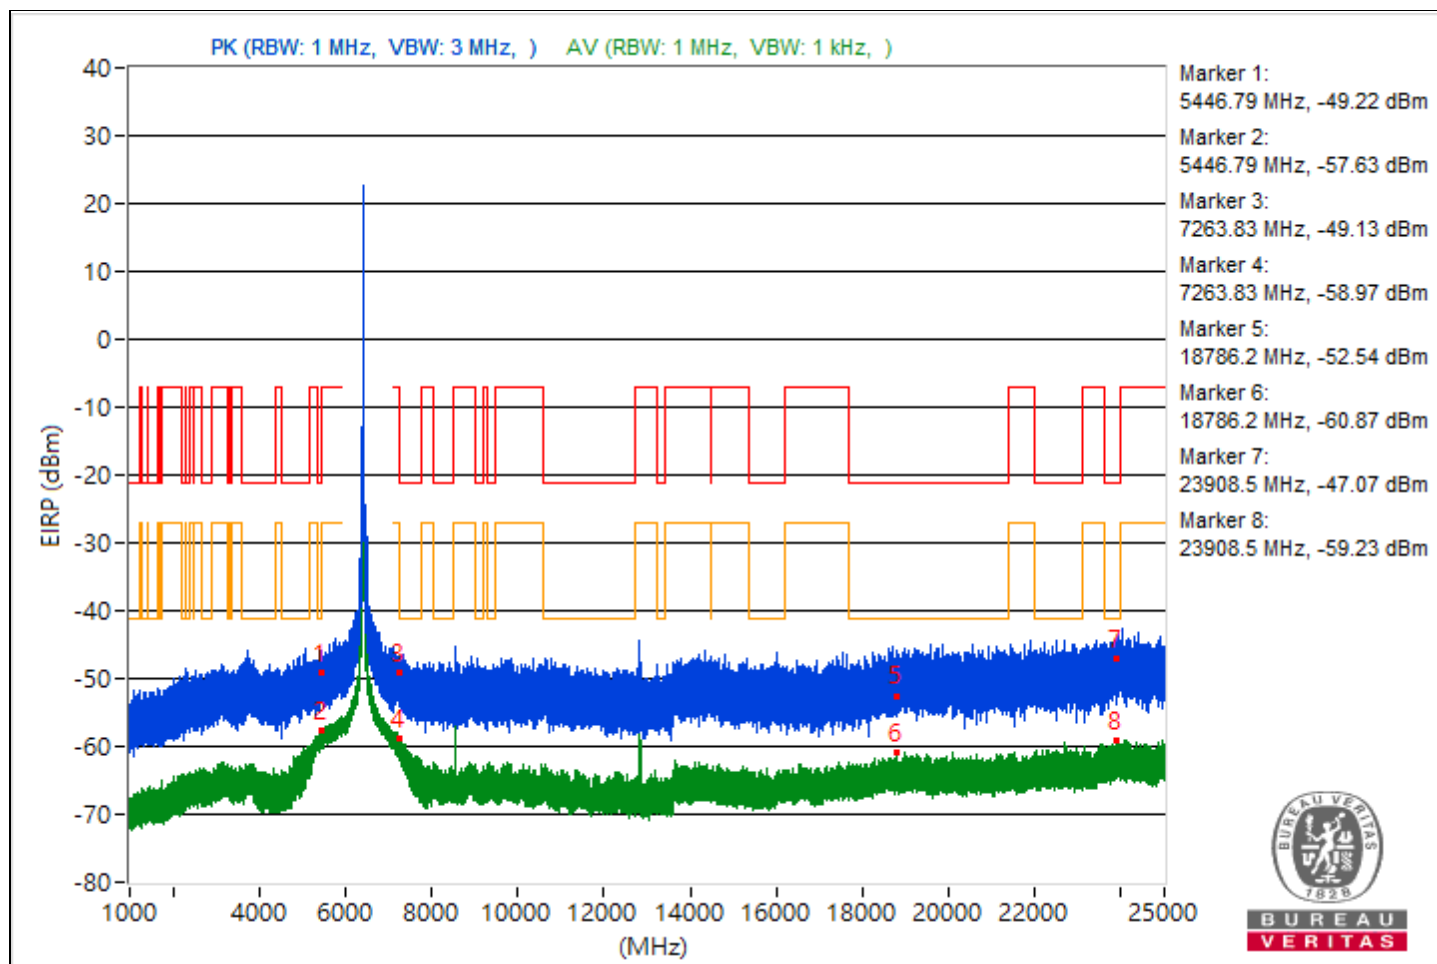


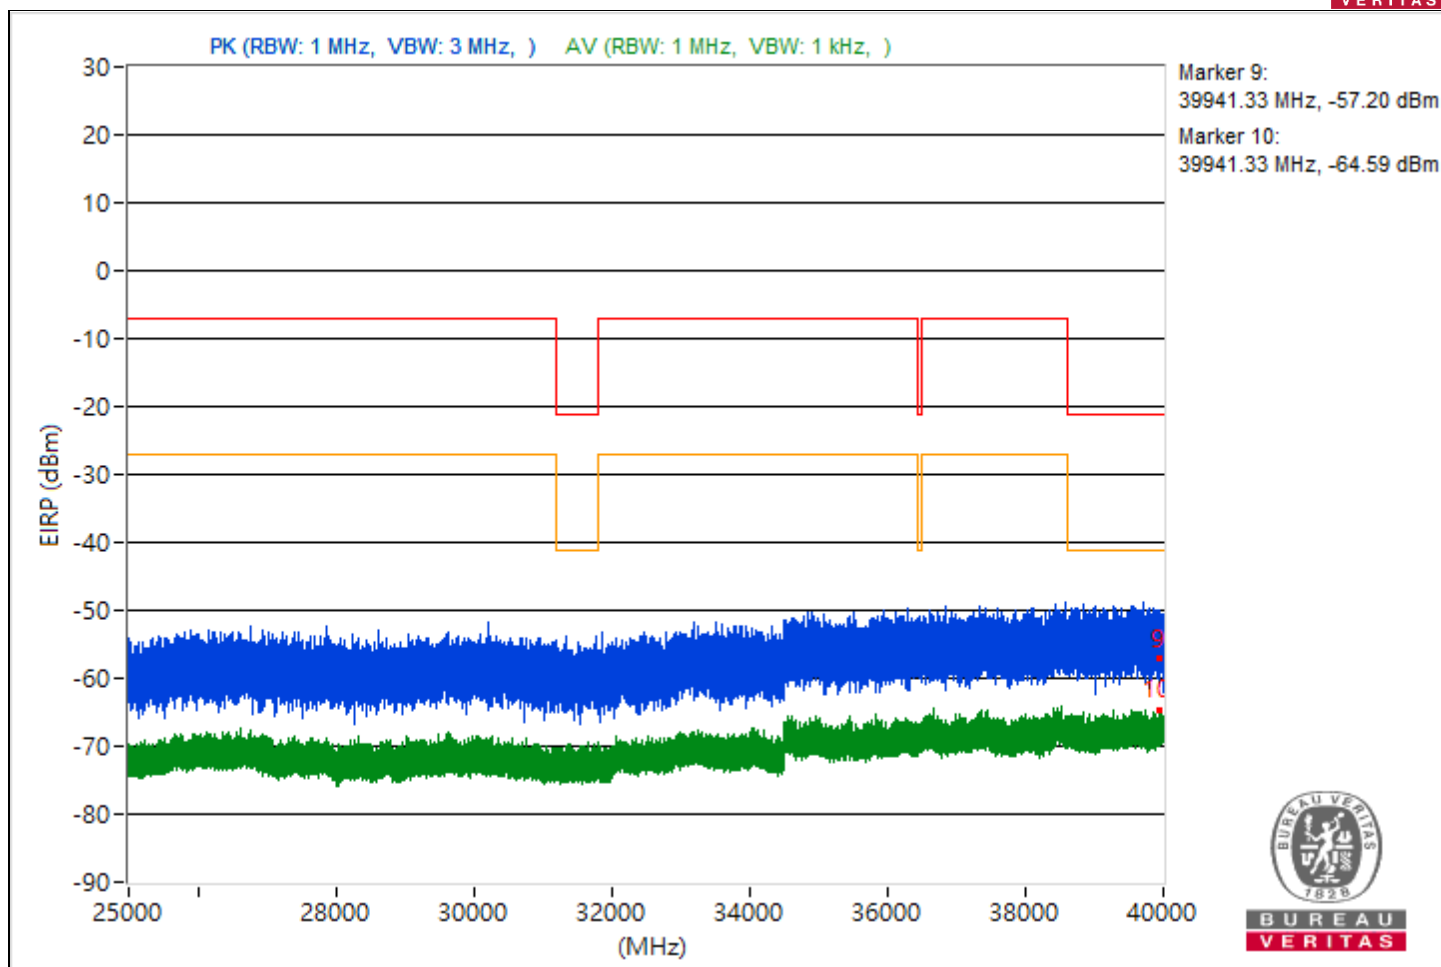


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5448.42         | 45.76 PK                | 74             | -28.24      | -57.87                  | 8.37                   | -49.5            |
| 2                            | 5448.42         | 36.69 AV                | 54             | -17.31      | -66.94                  | 8.37                   | -58.57           |
| 3                            | 7254.19         | 44.35 PK                | 74             | -29.65      | -59.28                  | 8.37                   | -50.91           |
| 4                            | 7254.19         | 36.6 AV                 | 54             | -17.4       | -67.03                  | 8.37                   | -58.66           |
| 5                            | 19041           | 45.35 PK                | 74             | -28.65      | -58.28                  | 8.37                   | -49.91           |
| 6                            | 19041           | 34.51 AV                | 54             | -19.49      | -69.12                  | 8.37                   | -60.75           |
| 7                            | 23998           | 47.14 PK                | 74             | -26.86      | -56.49                  | 8.37                   | -48.12           |
| 8                            | 23998           | 35.99 AV                | 54             | -18.01      | -67.64                  | 8.37                   | -59.27           |
| 9                            | 39597.78        | 38.14 PK                | 74             | -35.86      | -65.49                  | 8.37                   | -57.12           |
| 10                           | 39597.78        | 30.75 AV                | 54             | -23.25      | -72.88                  | 8.37                   | -64.51           |

Note: Margin value = Emission Level - Limit value

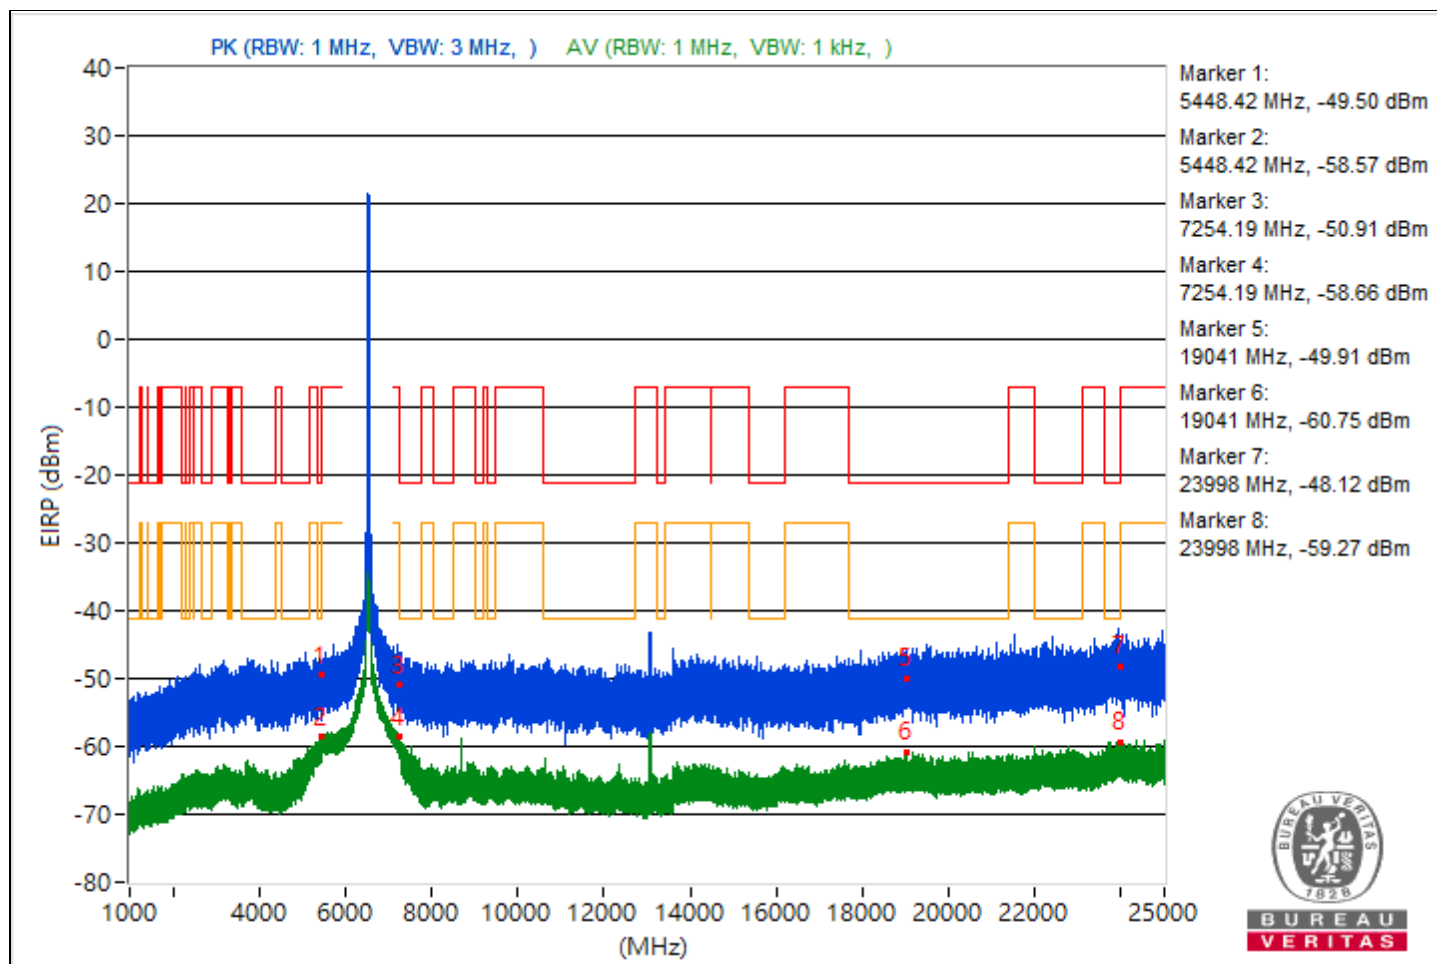


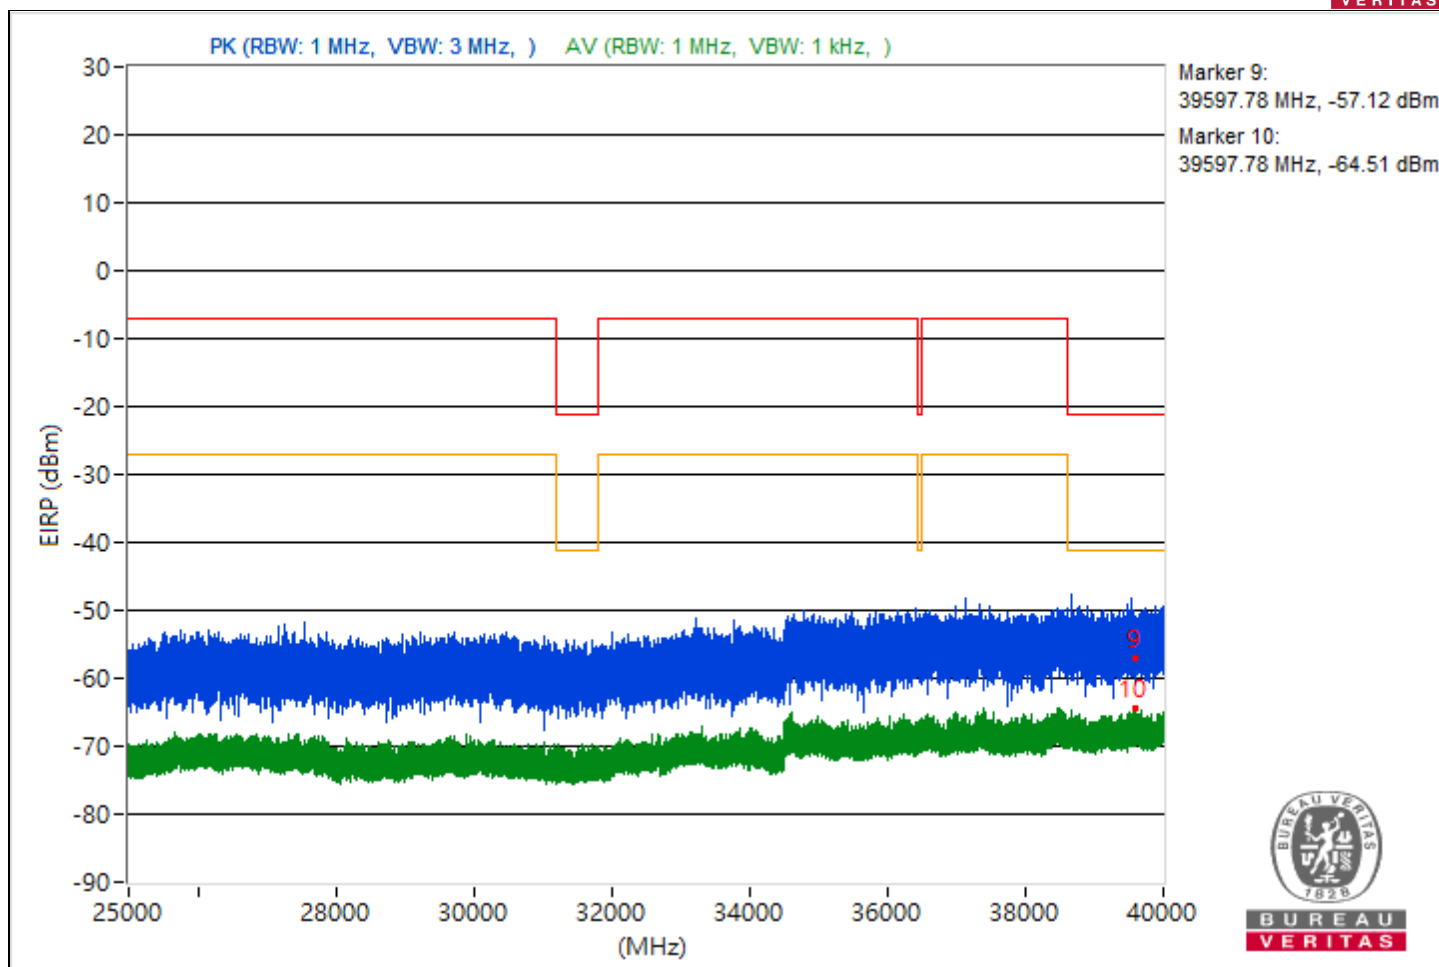


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 149 : 6695 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5450.13         | 45.45 PK                | 74             | -28.55      | -58.18                  | 8.37                   | -49.81           |
| 2                            | 5450.13         | 36.08 AV                | 54             | -17.92      | -67.55                  | 8.37                   | -59.18           |
| 3                            | 13388.09        | 49.69 PK                | 74             | -24.31      | -53.94                  | 8.37                   | -45.57           |
| 4                            | 13388.09        | 43.65 AV                | 54             | -10.35      | -59.98                  | 8.37                   | -51.61           |
| 5                            | 20084.4         | 47.74 PK                | 74             | -26.26      | -55.89                  | 8.37                   | -47.52           |
| 6                            | 20084.4         | 37.33 AV                | 54             | -16.67      | -66.3                   | 8.37                   | -57.93           |
| 7                            | 23934.1         | 49.07 PK                | 74             | -24.93      | -54.56                  | 8.37                   | -46.19           |
| 8                            | 23934.1         | 35.87 AV                | 54             | -18.13      | -67.76                  | 8.37                   | -59.39           |
| 9                            | 39668.44        | 41.08 PK                | 74             | -32.92      | -62.55                  | 8.37                   | -54.18           |
| 10                           | 39668.44        | 30.99 AV                | 54             | -23.01      | -72.64                  | 8.37                   | -64.27           |

Note: Margin value = Emission Level - Limit value

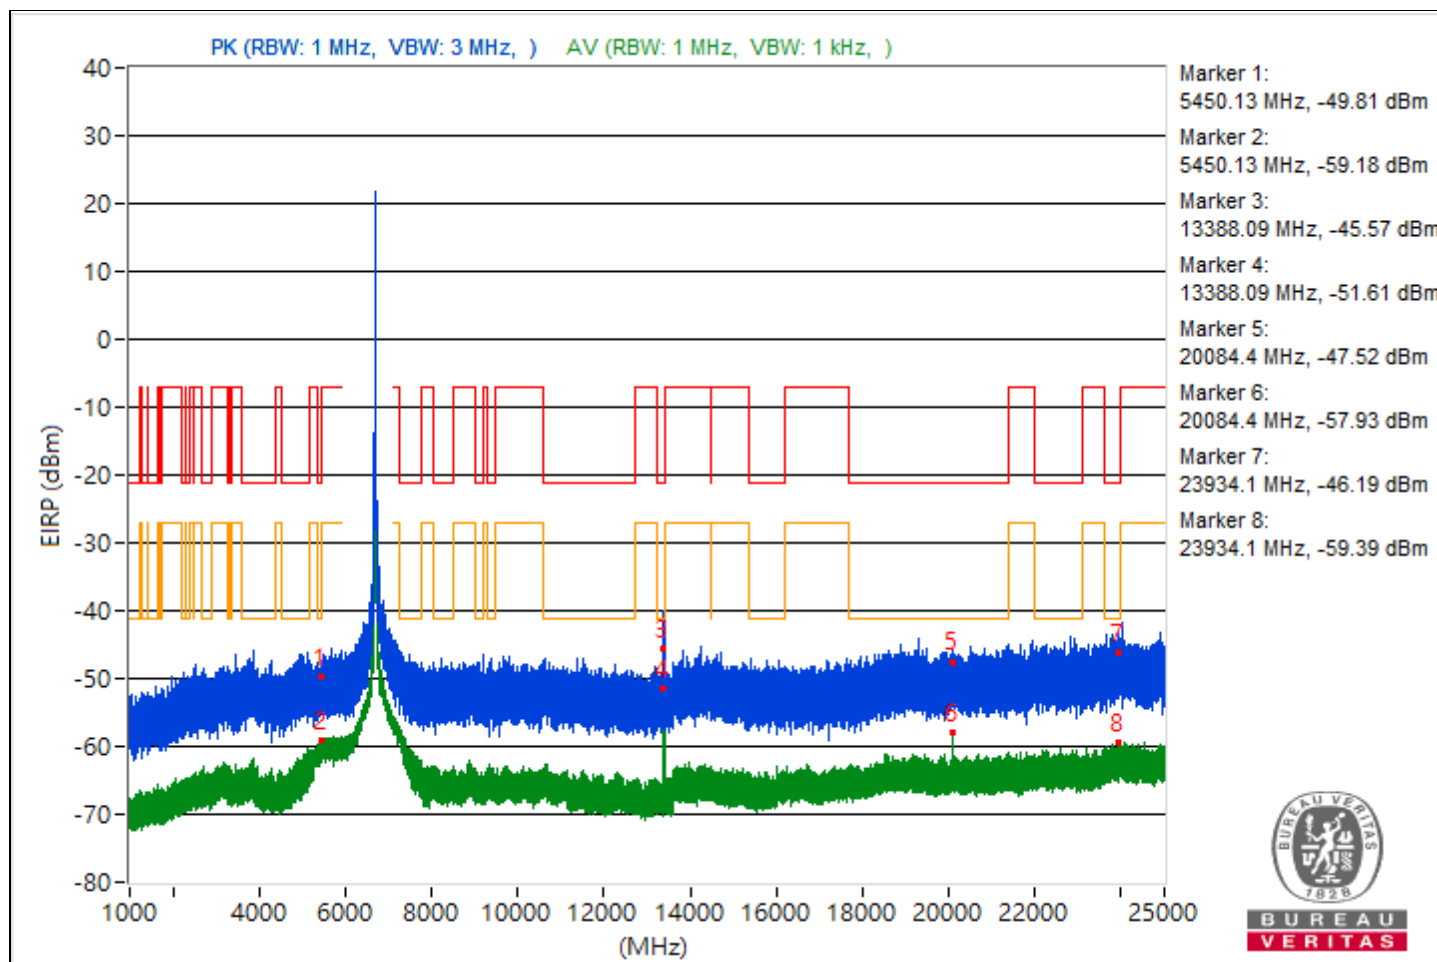


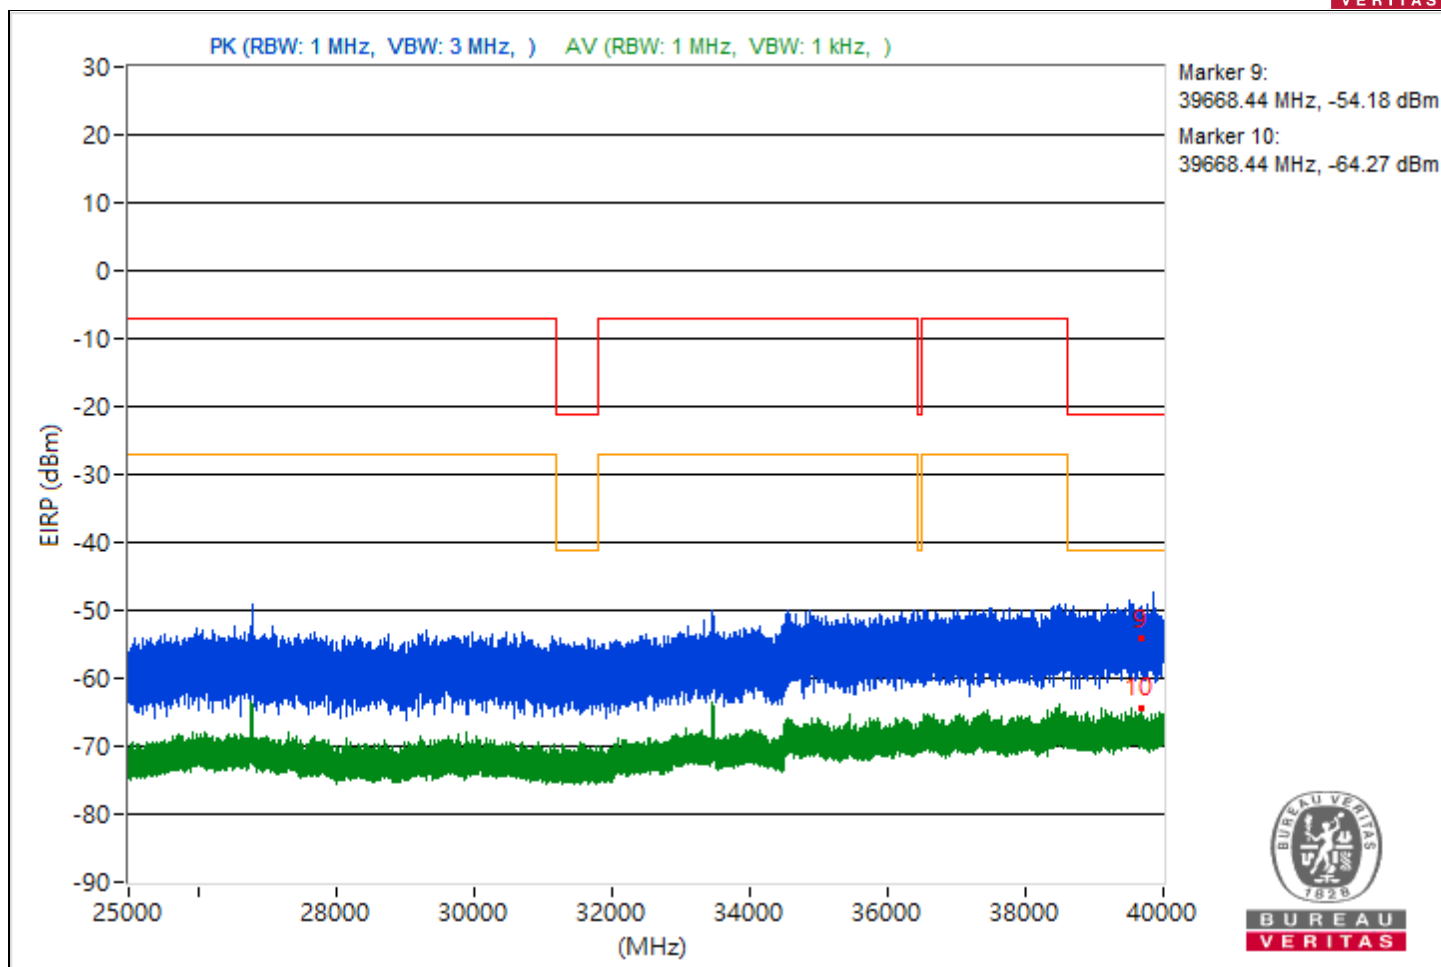


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5434.89         | 44.17 PK                | 74             | -29.83      | -59.46                  | 8.37                   | -51.09           |
| 2                            | 5434.89         | 35.74 AV                | 54             | -18.26      | -67.89                  | 8.37                   | -59.52           |
| 3                            | 7250.07         | 47.05 PK                | 74             | -26.95      | -56.58                  | 8.37                   | -48.21           |
| 4                            | 7250.07         | 40.03 AV                | 54             | -13.97      | -63.6                   | 8.37                   | -55.23           |
| 5                            | 20569.8         | 45.06 PK                | 74             | -28.94      | -58.57                  | 8.37                   | -50.2            |
| 6                            | 20569.8         | 36.85 AV                | 54             | -17.15      | -66.78                  | 8.37                   | -58.41           |
| 7                            | 23731.1         | 47.58 PK                | 74             | -26.42      | -56.05                  | 8.37                   | -47.68           |
| 8                            | 23731.1         | 36.12 AV                | 54             | -17.88      | -67.51                  | 8.37                   | -59.14           |
| 9                            | 39192           | 40.45 PK                | 74             | -33.55      | -63.18                  | 8.37                   | -54.81           |
| 10                           | 39192           | 30.86 AV                | 54             | -23.14      | -72.77                  | 8.37                   | -64.4            |

Note: Margin value = Emission Level - Limit value

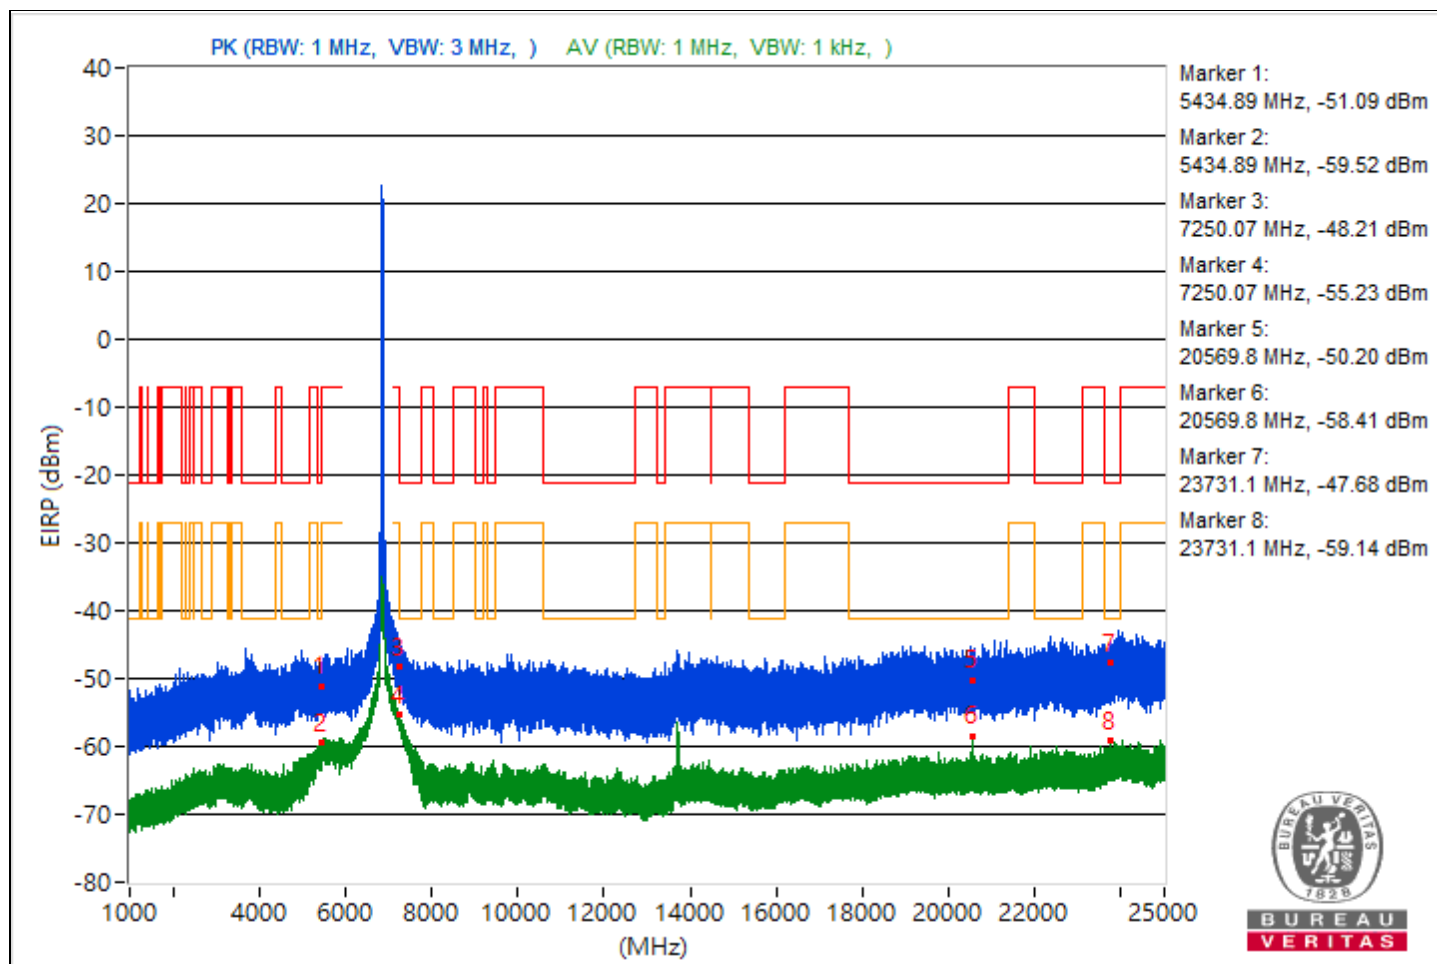


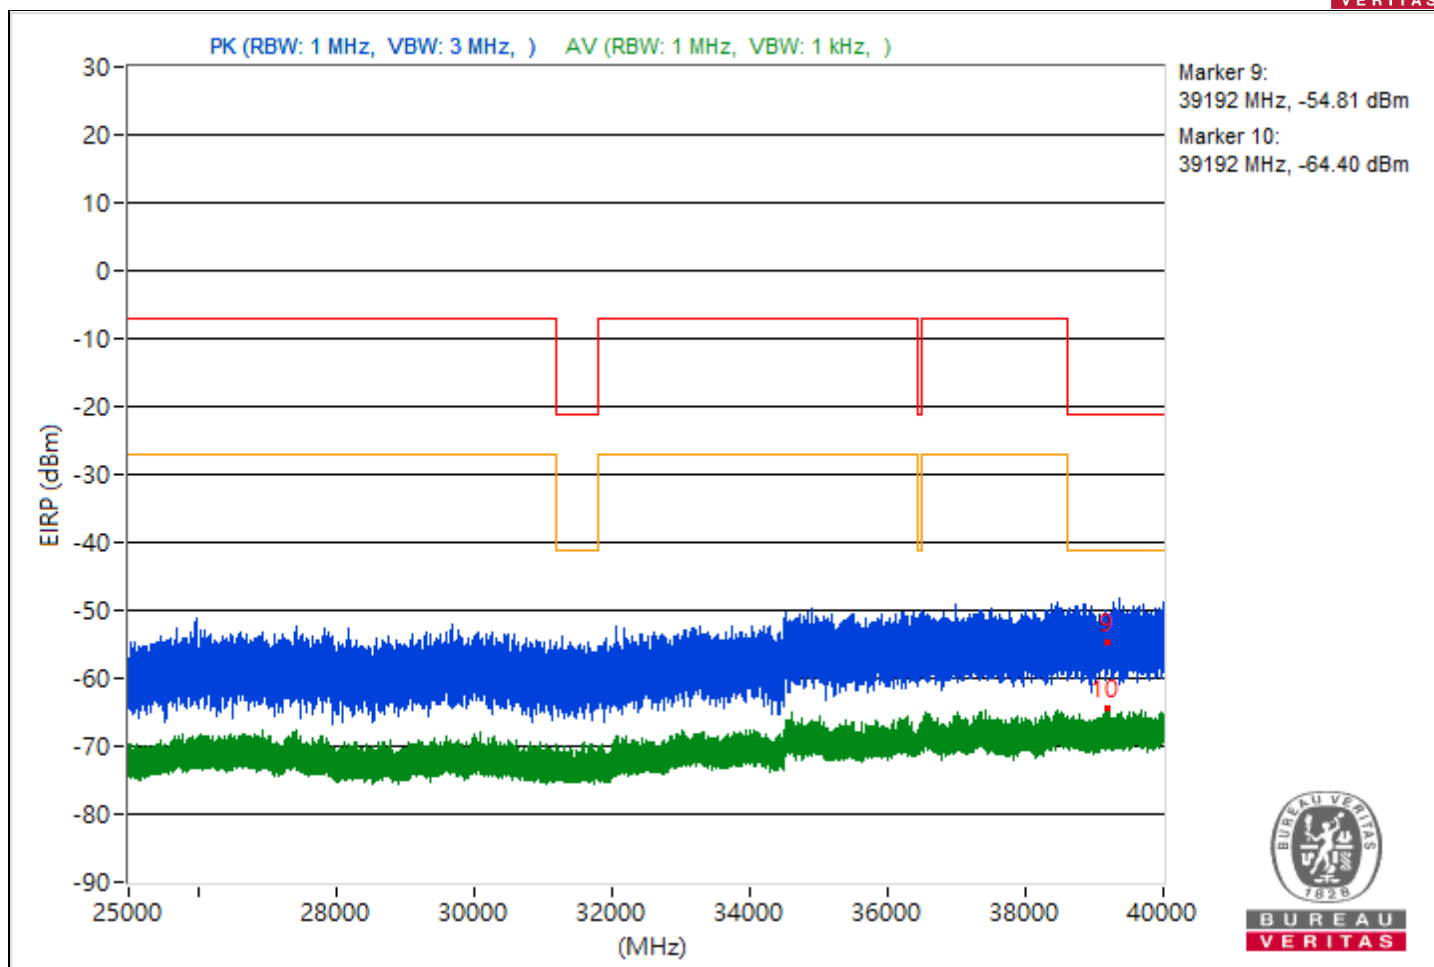


|                 |                  |                          |                 |
|-----------------|------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 3 : 5965 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung      |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5455.27         | 46.94 PK                | 74             | -27.06      | -56.69                  | 8.37                   | -48.32           |
| 2                            | 5455.27         | 39.95 AV                | 54             | -14.05      | -63.68                  | 8.37                   | -55.31           |
| 3                            | 11930.4         | 48.44 PK                | 74             | -25.56      | -55.19                  | 8.37                   | -46.82           |
| 4                            | 11930.4         | 42.78 AV                | 54             | -11.22      | -60.85                  | 8.37                   | -52.48           |
| 5                            | 19303           | 45.9 PK                 | 74             | -28.1       | -57.73                  | 8.37                   | -49.36           |
| 6                            | 19303           | 34.3 AV                 | 54             | -19.7       | -69.33                  | 8.37                   | -60.96           |
| 7                            | 23954.4         | 46.77 PK                | 74             | -27.23      | -56.86                  | 8.37                   | -48.49           |
| 8                            | 23954.4         | 36.76 AV                | 54             | -17.24      | -66.87                  | 8.37                   | -58.5            |
| 9                            | 39592.8         | 40.61 PK                | 74             | -33.39      | -63.02                  | 8.37                   | -54.65           |
| 10                           | 39592.8         | 30.93 AV                | 54             | -23.07      | -72.7                   | 8.37                   | -64.33           |

Note: Margin value = Emission Level - Limit value

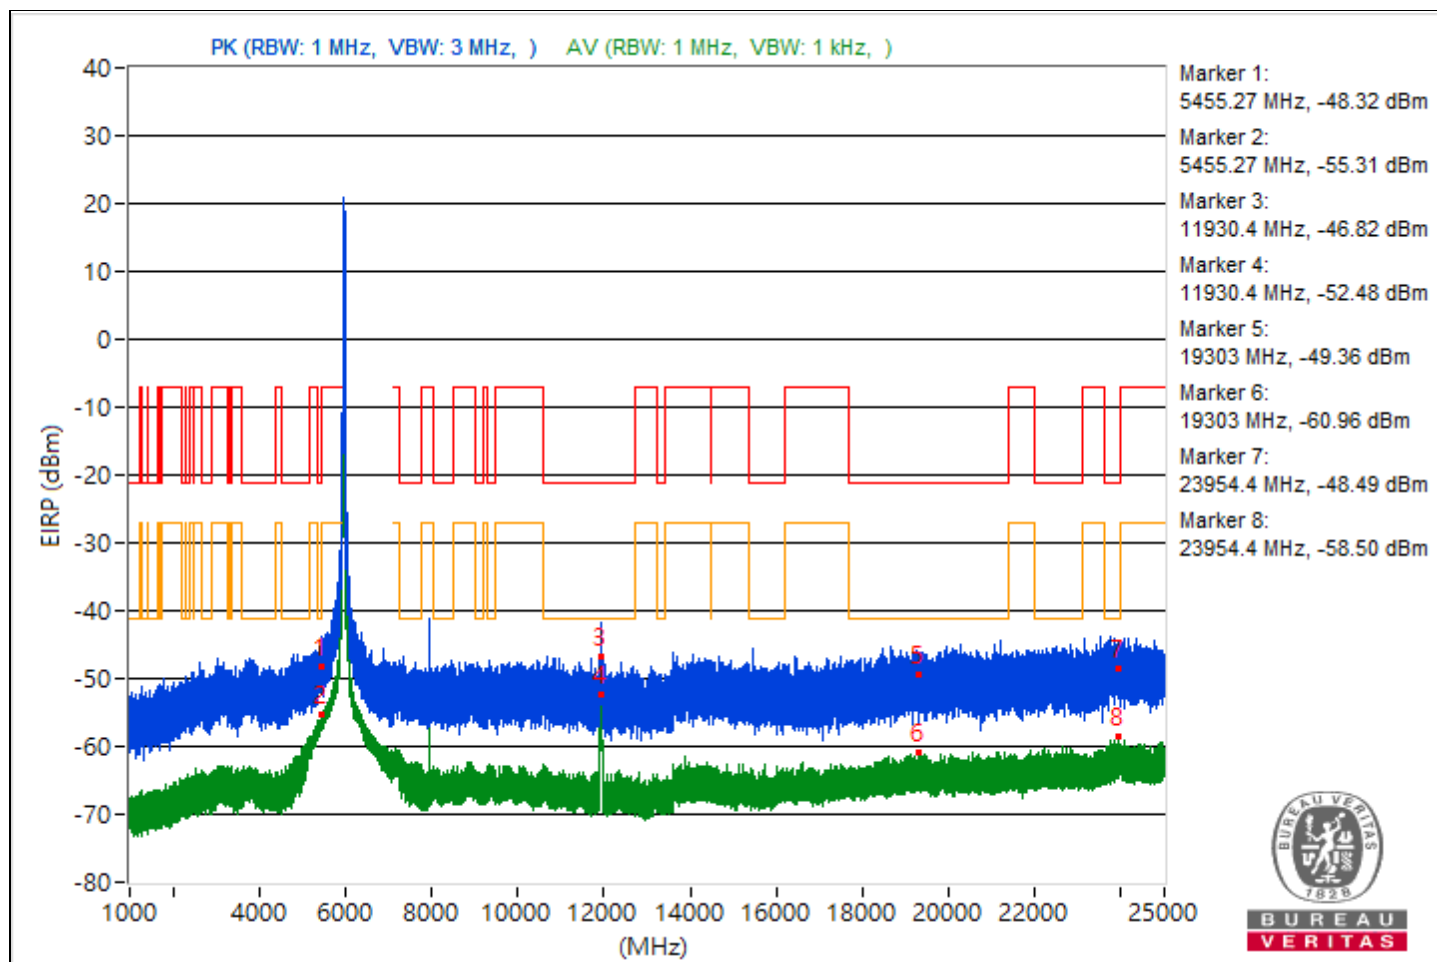


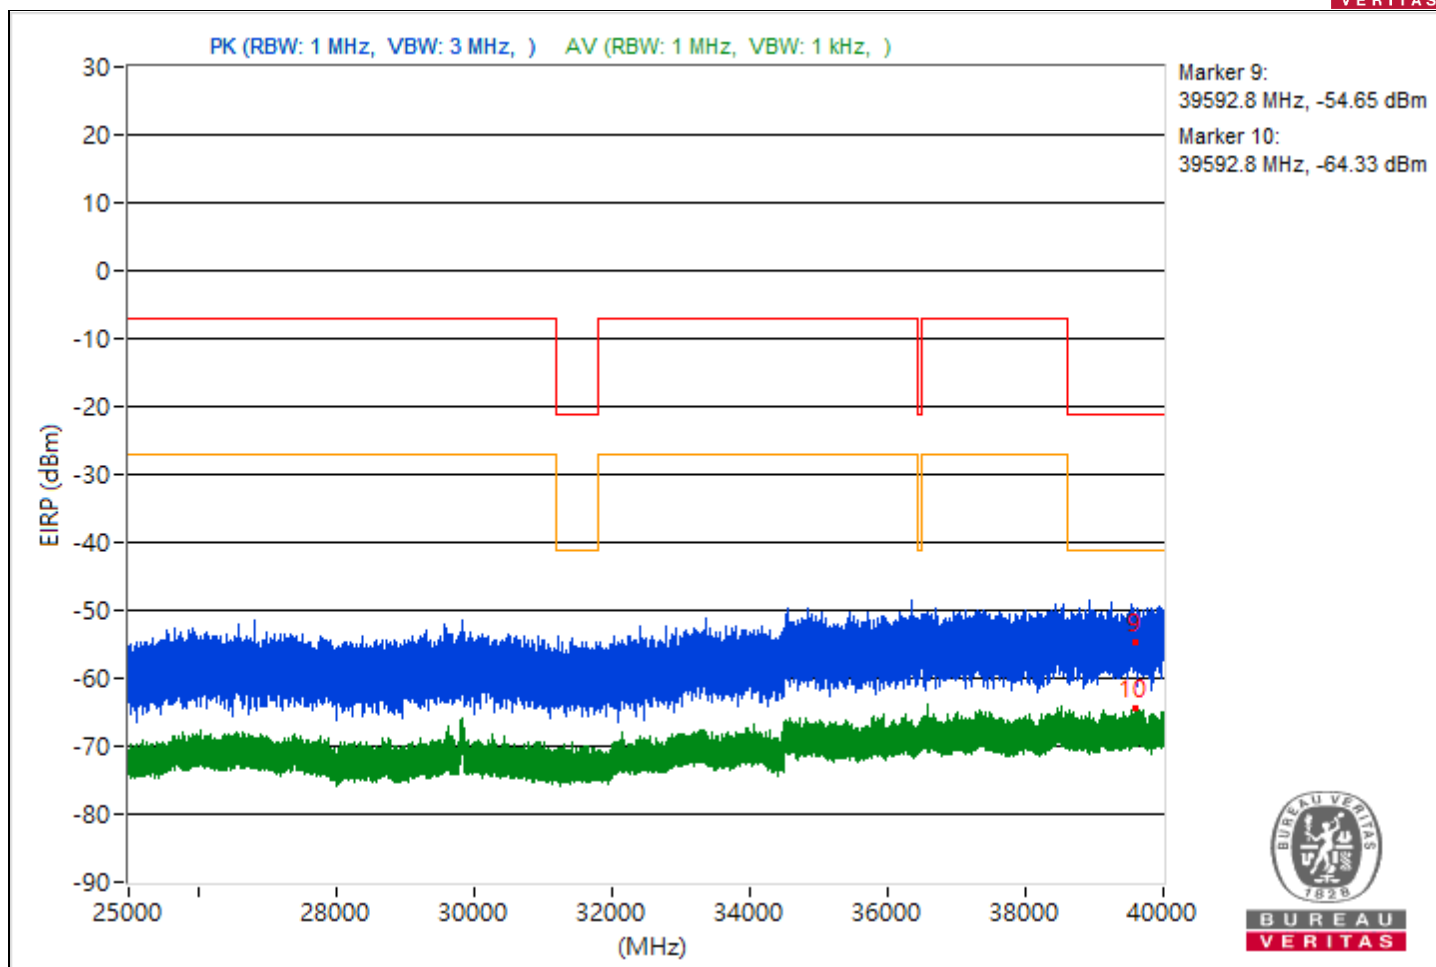


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 43 : 6165 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung      |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5444.92         | 45.16 PK                | 74             | -28.84      | -58.47                  | 8.37                   | -50.1            |
| 2                            | 5444.92         | 38.67 AV                | 54             | -15.33      | -64.96                  | 8.37                   | -56.59           |
| 3                            | 8220            | 50.77 PK                | 74             | -23.23      | -52.86                  | 8.37                   | -44.49           |
| 4                            | 8220            | 48.38 AV                | 54             | -5.62       | -55.25                  | 8.37                   | -46.88           |
| 5                            | 20498.5         | 45.93 PK                | 74             | -28.07      | -57.7                   | 8.37                   | -49.33           |
| 6                            | 20498.5         | 34.91 AV                | 54             | -19.09      | -68.72                  | 8.37                   | -60.35           |
| 7                            | 23913.2         | 48.42 PK                | 74             | -25.58      | -55.21                  | 8.37                   | -46.84           |
| 8                            | 23913.2         | 35.85 AV                | 54             | -18.15      | -67.78                  | 8.37                   | -59.41           |
| 9                            | 39096.53        | 42.15 PK                | 74             | -31.85      | -61.48                  | 8.37                   | -53.11           |
| 10                           | 39096.53        | 30.82 AV                | 54             | -23.18      | -72.81                  | 8.37                   | -64.44           |

Note: Margin value = Emission Level - Limit value

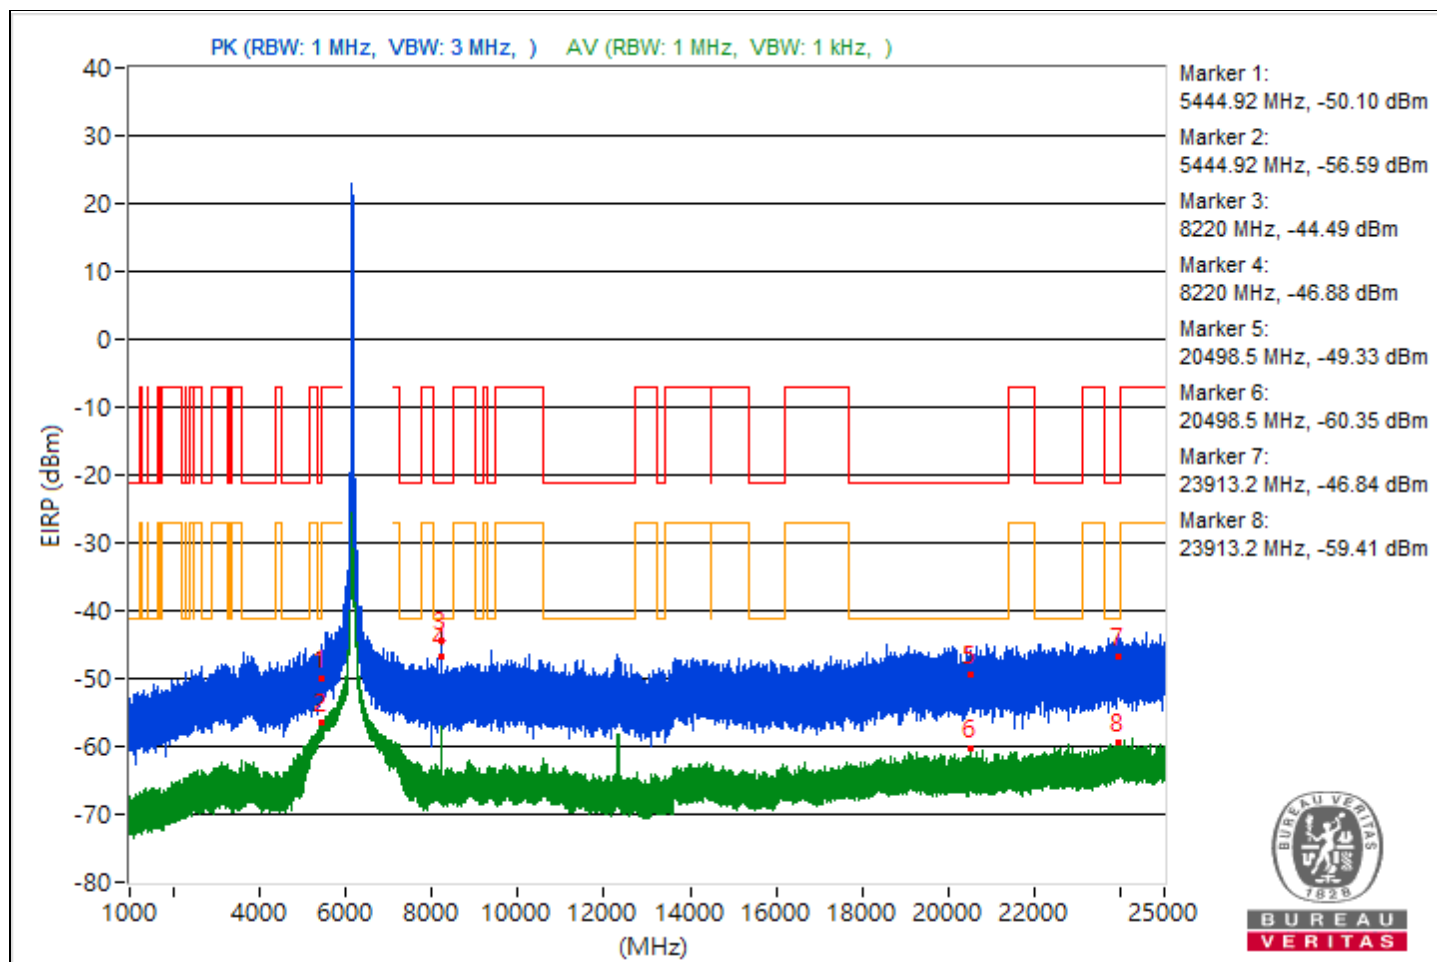


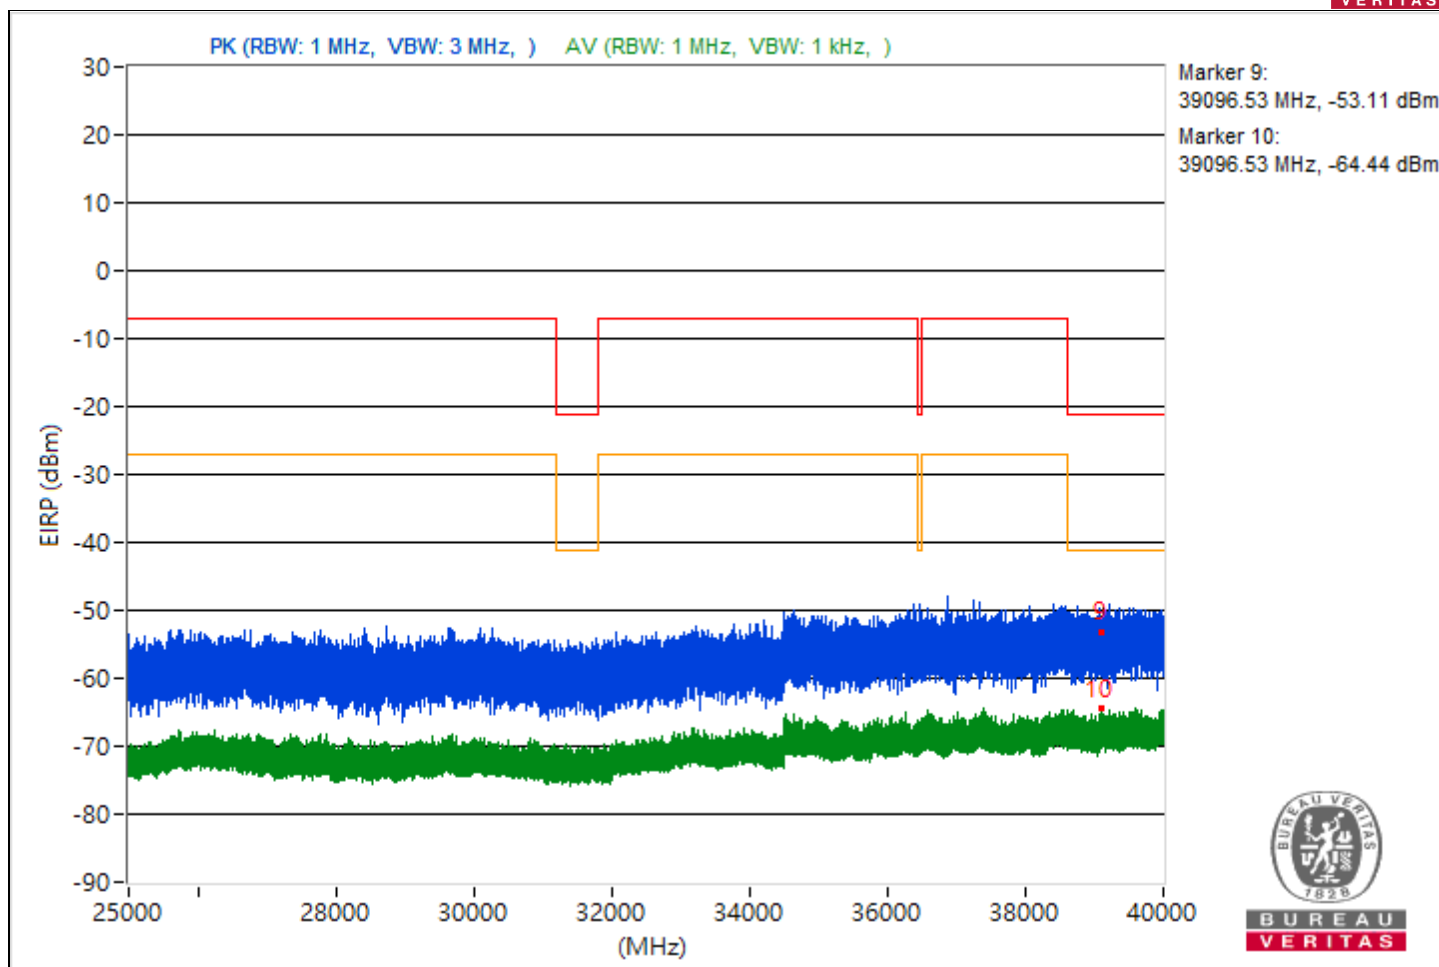


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 91 : 6405 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung      |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5456.12         | 45.8 PK                 | 74             | -28.2       | -57.83                  | 8.37                   | -49.46           |
| 2                            | 5456.12         | 38.05 AV                | 54             | -15.95      | -65.58                  | 8.37                   | -57.21           |
| 3                            | 7250.22         | 44.2 PK                 | 74             | -29.8       | -59.43                  | 8.37                   | -51.06           |
| 4                            | 7250.22         | 36.37 AV                | 54             | -17.63      | -67.26                  | 8.37                   | -58.89           |
| 5                            | 19033.2         | 44.44 PK                | 74             | -29.56      | -59.19                  | 8.37                   | -50.82           |
| 6                            | 19033.2         | 35 AV                   | 54             | -19         | -68.63                  | 8.37                   | -60.26           |
| 7                            | 23975.3         | 46.61 PK                | 74             | -27.39      | -57.02                  | 8.37                   | -48.65           |
| 8                            | 23975.3         | 36.55 AV                | 54             | -17.45      | -67.08                  | 8.37                   | -58.71           |
| 9                            | 39586.31        | 44.24 PK                | 74             | -29.76      | -59.39                  | 8.37                   | -51.02           |
| 10                           | 39586.31        | 30.89 AV                | 54             | -23.11      | -72.74                  | 8.37                   | -64.37           |

Note: Margin value = Emission Level - Limit value

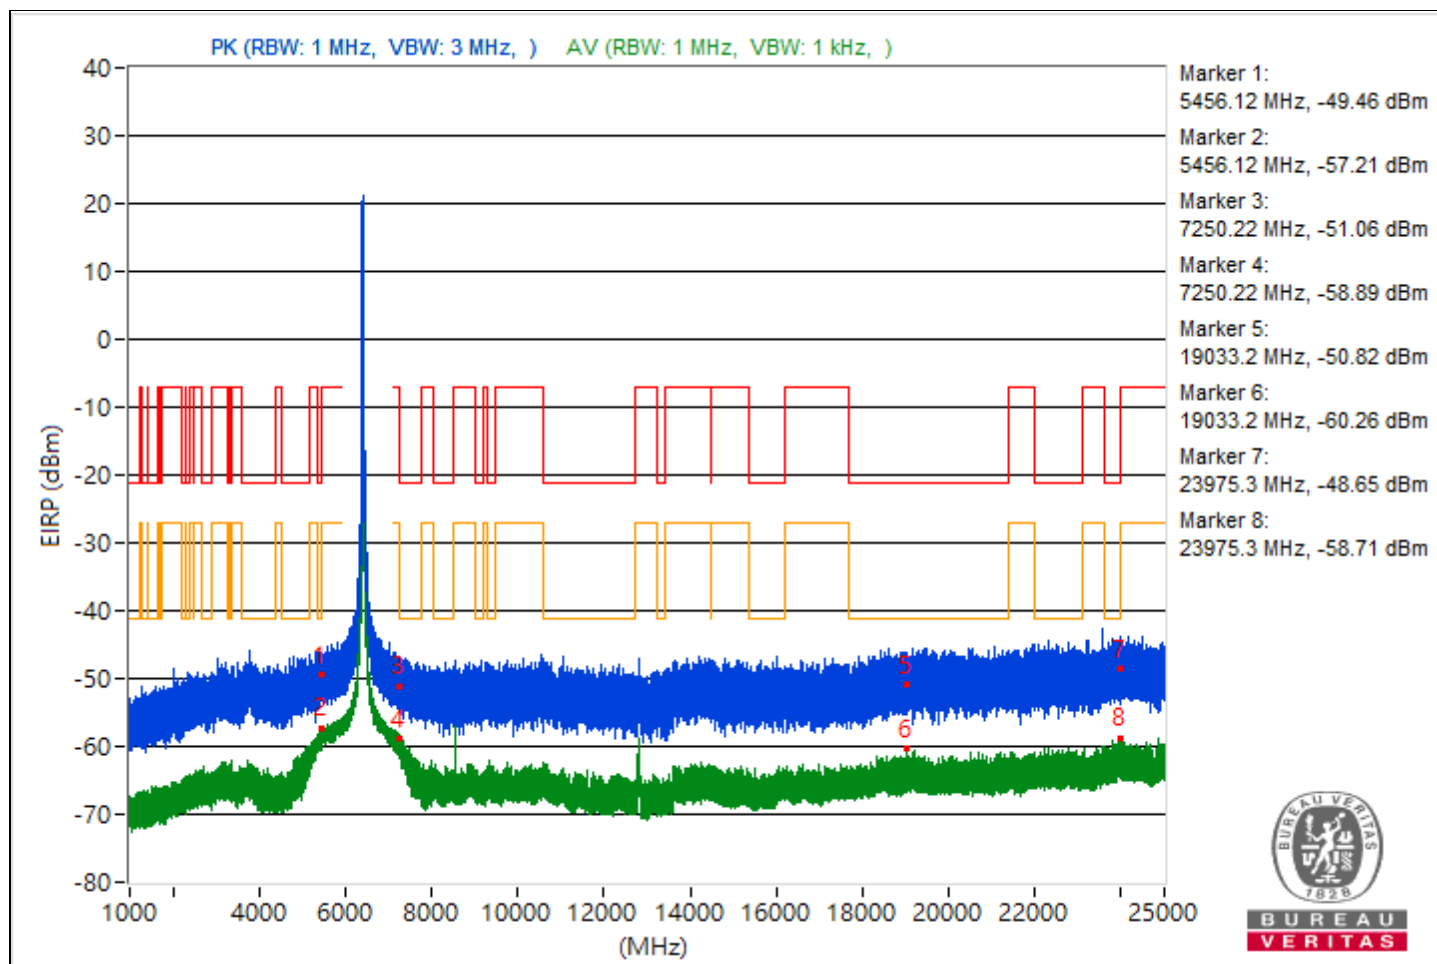


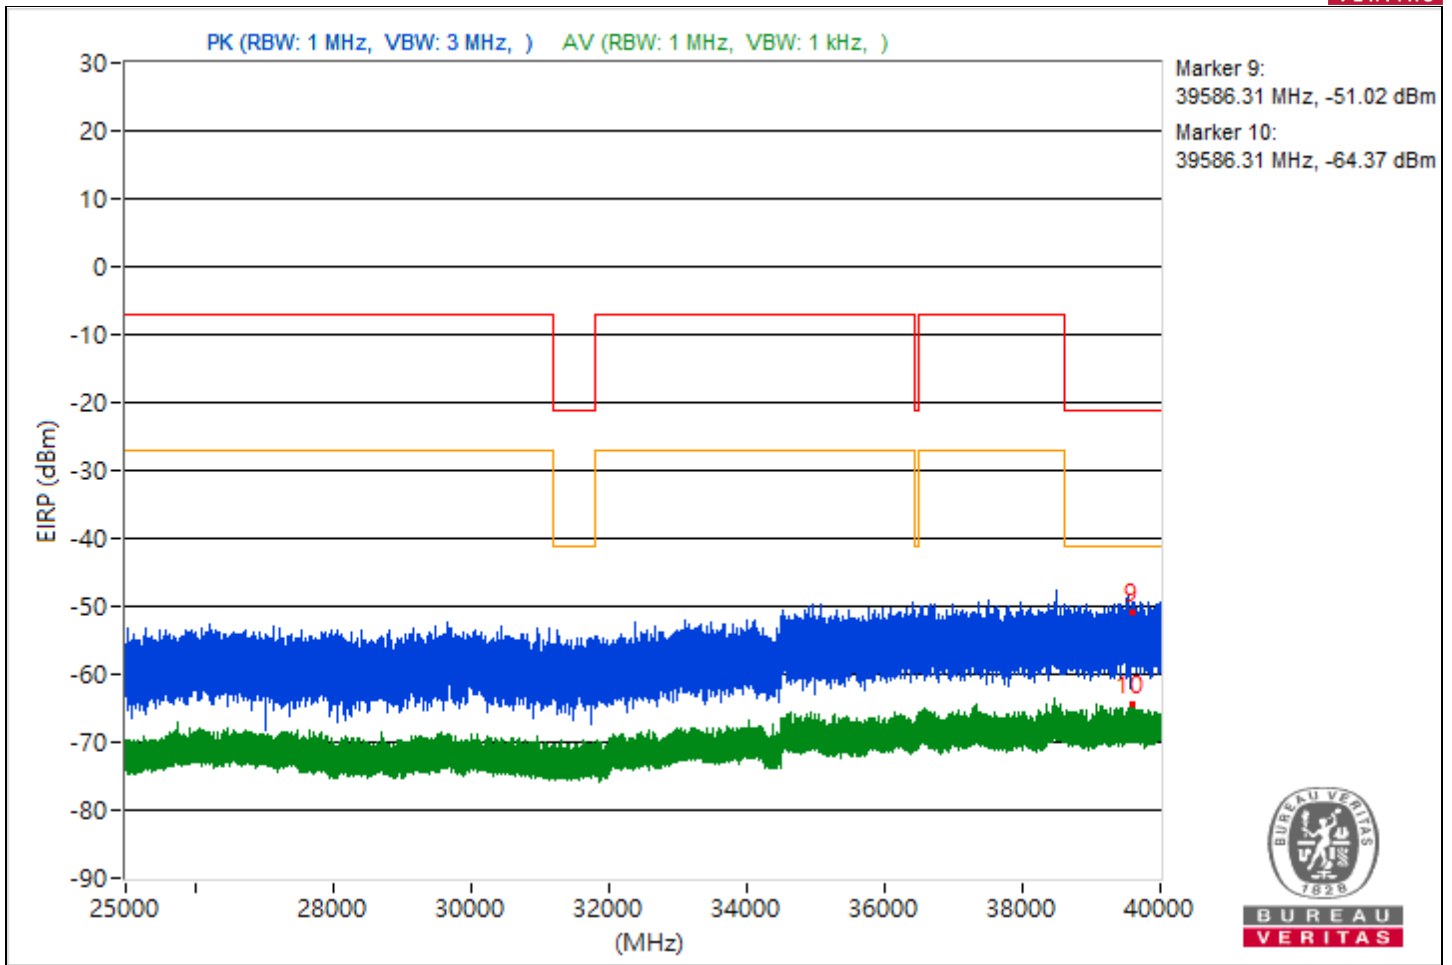


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 123 : 6565 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459.39         | 45.67 PK                | 74             | -28.33      | -57.96                  | 8.37                   | -49.59           |
| 2                            | 5459.39         | 36.54 AV                | 54             | -17.46      | -67.09                  | 8.37                   | -58.72           |
| 3                            | 7254.66         | 44.45 PK                | 74             | -29.55      | -59.18                  | 8.37                   | -50.81           |
| 4                            | 7254.66         | 36.51 AV                | 54             | -17.49      | -67.12                  | 8.37                   | -58.75           |
| 5                            | 21165.5         | 44.8 PK                 | 74             | -29.2       | -58.83                  | 8.37                   | -50.46           |
| 6                            | 21165.5         | 34.74 AV                | 54             | -19.26      | -68.89                  | 8.37                   | -60.52           |
| 7                            | 23799.9         | 47.54 PK                | 74             | -26.46      | -56.09                  | 8.37                   | -47.72           |
| 8                            | 23799.9         | 35.83 AV                | 54             | -18.17      | -67.8                   | 8.37                   | -59.43           |
| 9                            | 39571.47        | 38.31 PK                | 74             | -35.69      | -65.32                  | 8.37                   | -56.95           |
| 10                           | 39571.47        | 30.82 AV                | 54             | -23.18      | -72.81                  | 8.37                   | -64.44           |

Note: Margin value = Emission Level - Limit value

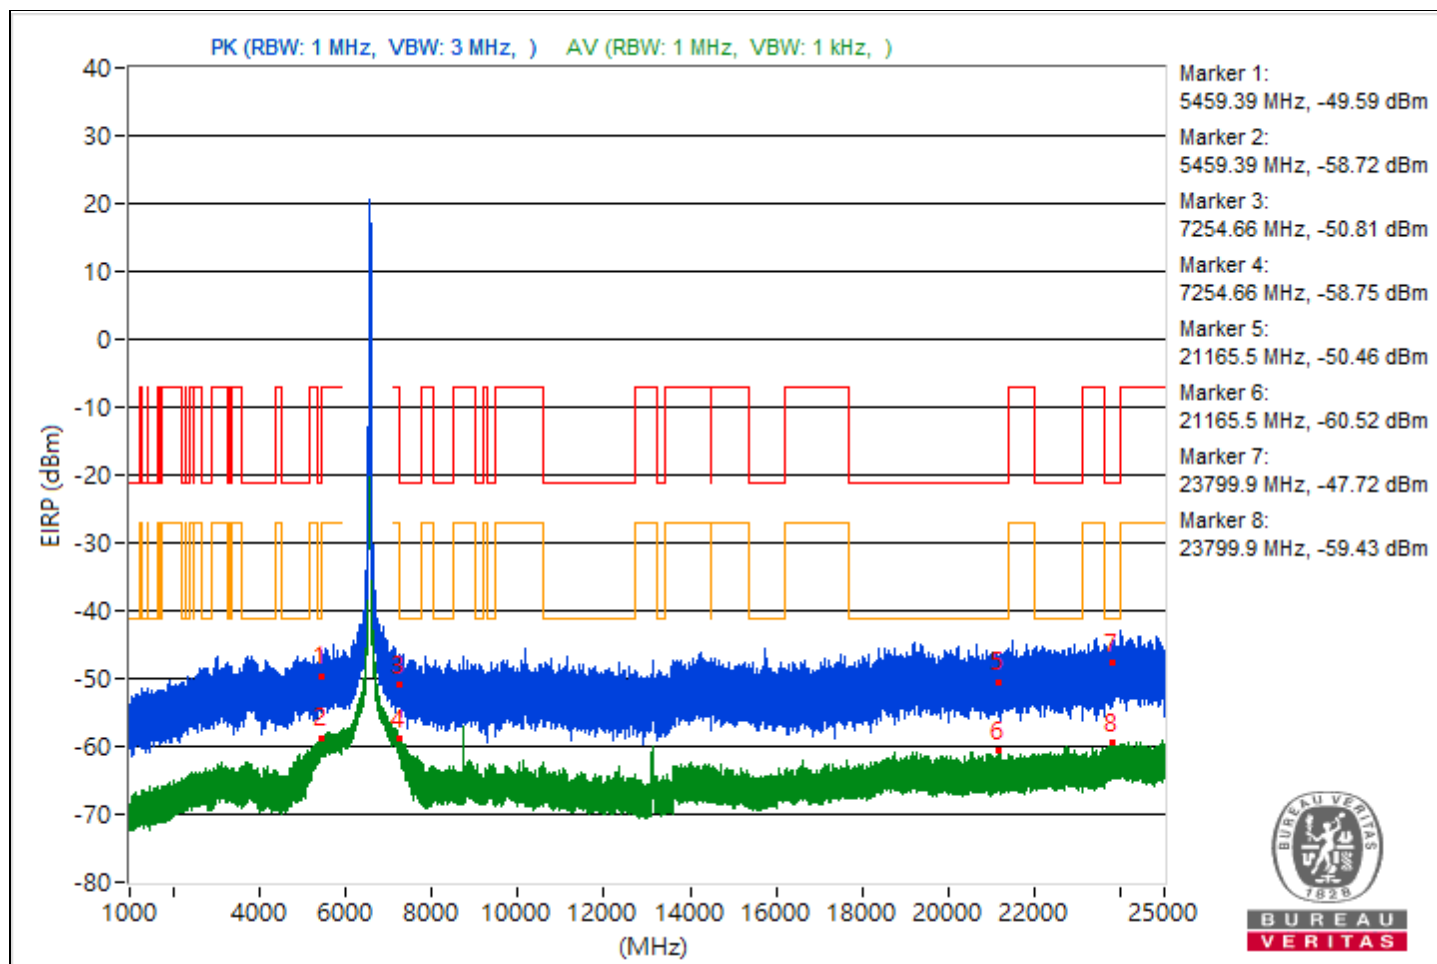


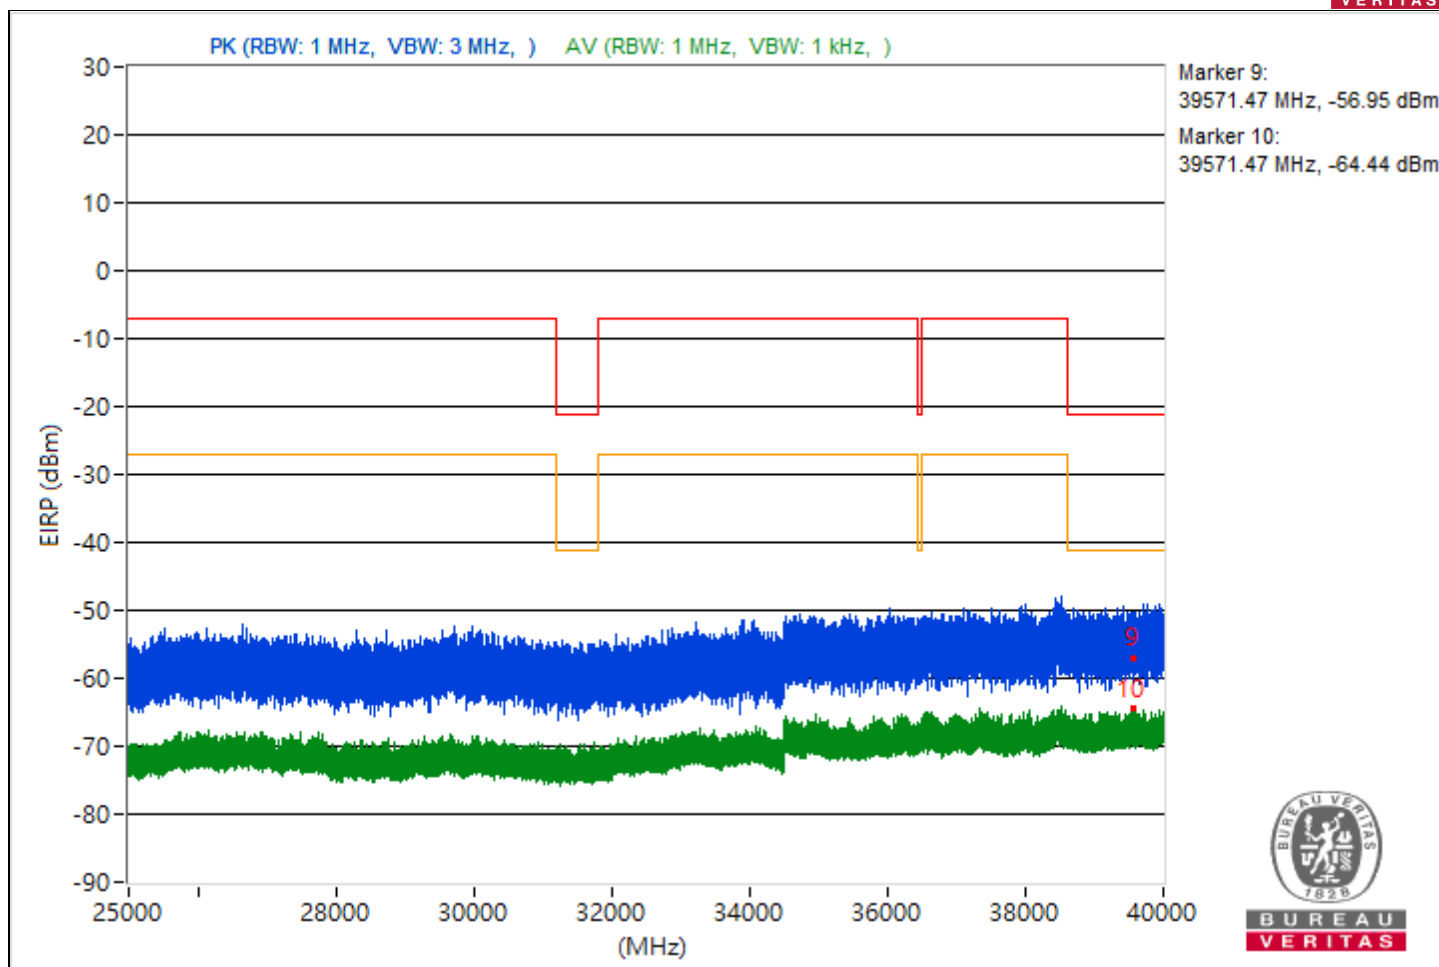


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 155 : 6725 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5455.34         | 43.22 PK                | 74             | -30.78      | -60.41                  | 8.37                   | -52.04           |
| 2                            | 5455.34         | 36.34 AV                | 54             | -17.66      | -67.29                  | 8.37                   | -58.92           |
| 3                            | 7255.2          | 46.76 PK                | 74             | -27.24      | -56.87                  | 8.37                   | -48.5            |
| 4                            | 7255.2          | 38.57 AV                | 54             | -15.43      | -65.06                  | 8.37                   | -56.69           |
| 5                            | 19041.2         | 43.51 PK                | 74             | -30.49      | -60.12                  | 8.37                   | -51.75           |
| 6                            | 19041.2         | 35.01 AV                | 54             | -18.99      | -68.62                  | 8.37                   | -60.25           |
| 7                            | 23959           | 45.05 PK                | 74             | -28.95      | -58.58                  | 8.37                   | -50.21           |
| 8                            | 23959           | 35.97 AV                | 54             | -18.03      | -67.66                  | 8.37                   | -59.29           |
| 9                            | 39391.2         | 39.73 PK                | 74             | -34.27      | -63.9                   | 8.37                   | -55.53           |
| 10                           | 39391.2         | 30.97 AV                | 54             | -23.03      | -72.66                  | 8.37                   | -64.29           |

Note: Margin value = Emission Level - Limit value

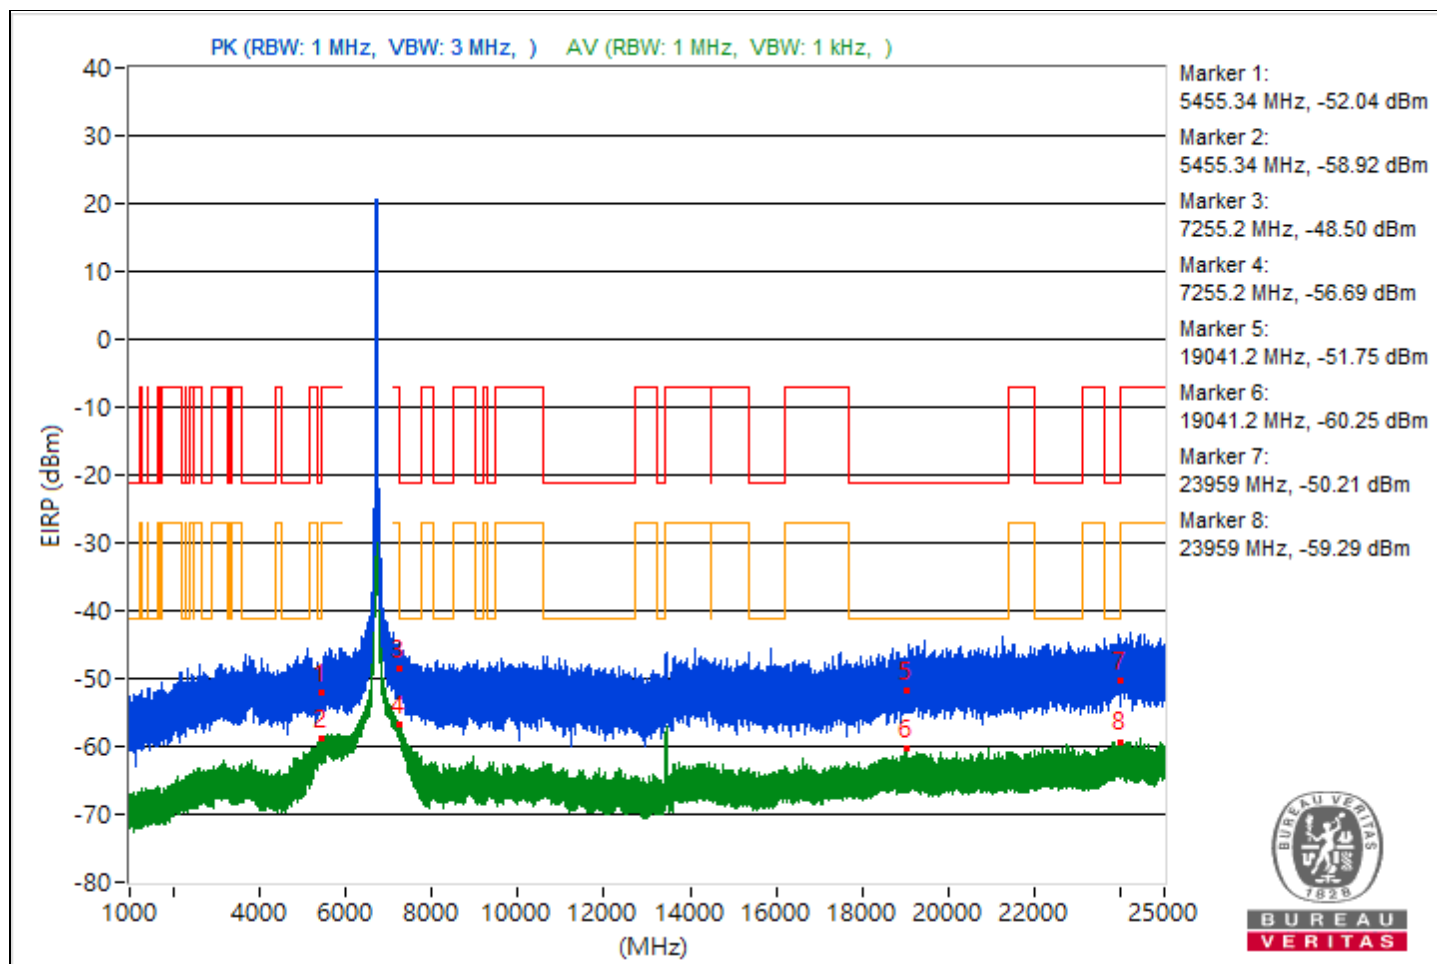


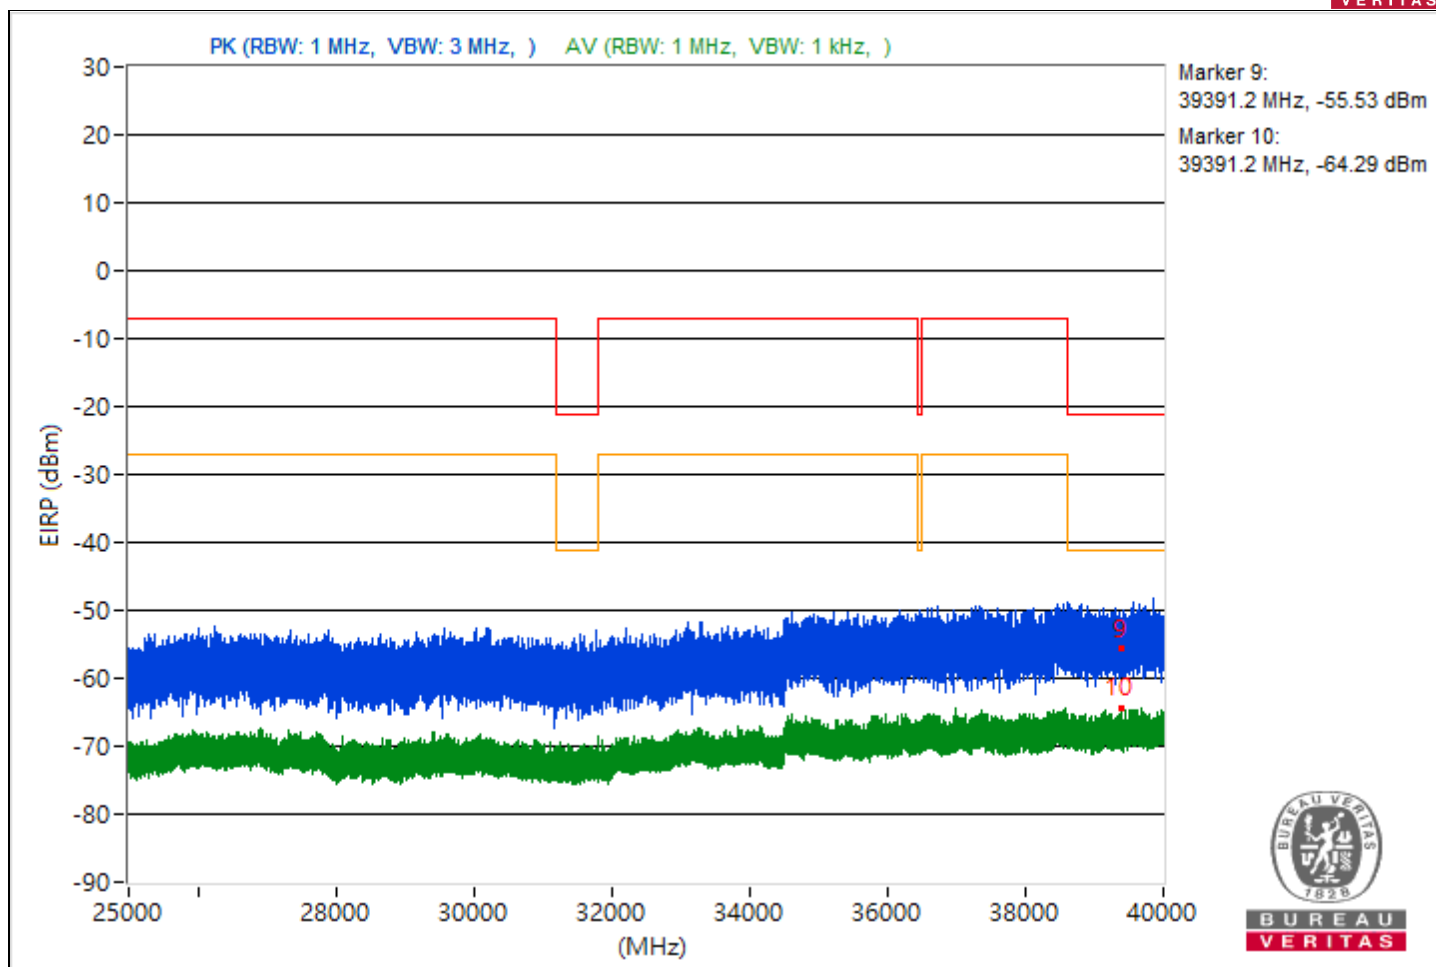


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40) | Channel                  | CH 179 : 6845 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5453.09         | 46.13 PK                | 74             | -27.87      | -57.5                   | 8.37                   | -49.13           |
| 2                            | 5453.09         | 35.73 AV                | 54             | -18.27      | -67.9                   | 8.37                   | -59.53           |
| 3                            | 7253.49         | 44.2 PK                 | 74             | -29.8       | -59.43                  | 8.37                   | -51.06           |
| 4                            | 7253.49         | 39.63 AV                | 54             | -14.37      | -64                     | 8.37                   | -55.63           |
| 5                            | 20527.6         | 46.95 PK                | 74             | -27.05      | -56.68                  | 8.37                   | -48.31           |
| 6                            | 20527.6         | 34.84 AV                | 54             | -19.16      | -68.79                  | 8.37                   | -60.42           |
| 7                            | 23981.1         | 43.4 PK                 | 74             | -30.6       | -60.23                  | 8.37                   | -51.86           |
| 8                            | 23981.1         | 36.1 AV                 | 54             | -17.9       | -67.53                  | 8.37                   | -59.16           |
| 9                            | 39652.98        | 38.92 PK                | 74             | -35.08      | -64.71                  | 8.37                   | -56.34           |
| 10                           | 39652.98        | 30.64 AV                | 54             | -23.36      | -72.99                  | 8.37                   | -64.62           |

Note: Margin value = Emission Level - Limit value

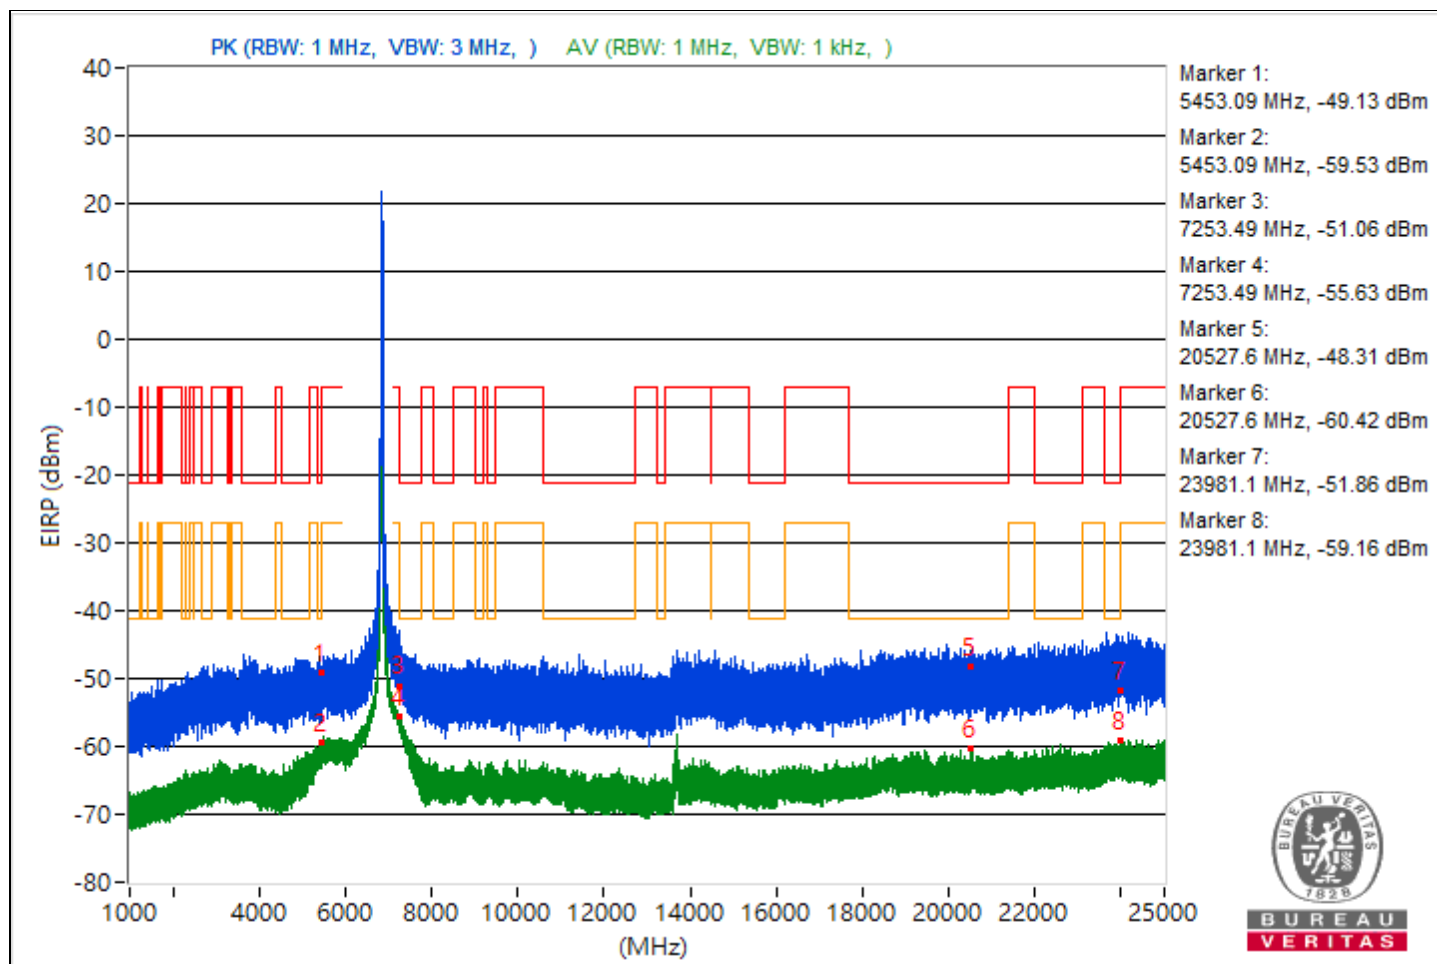


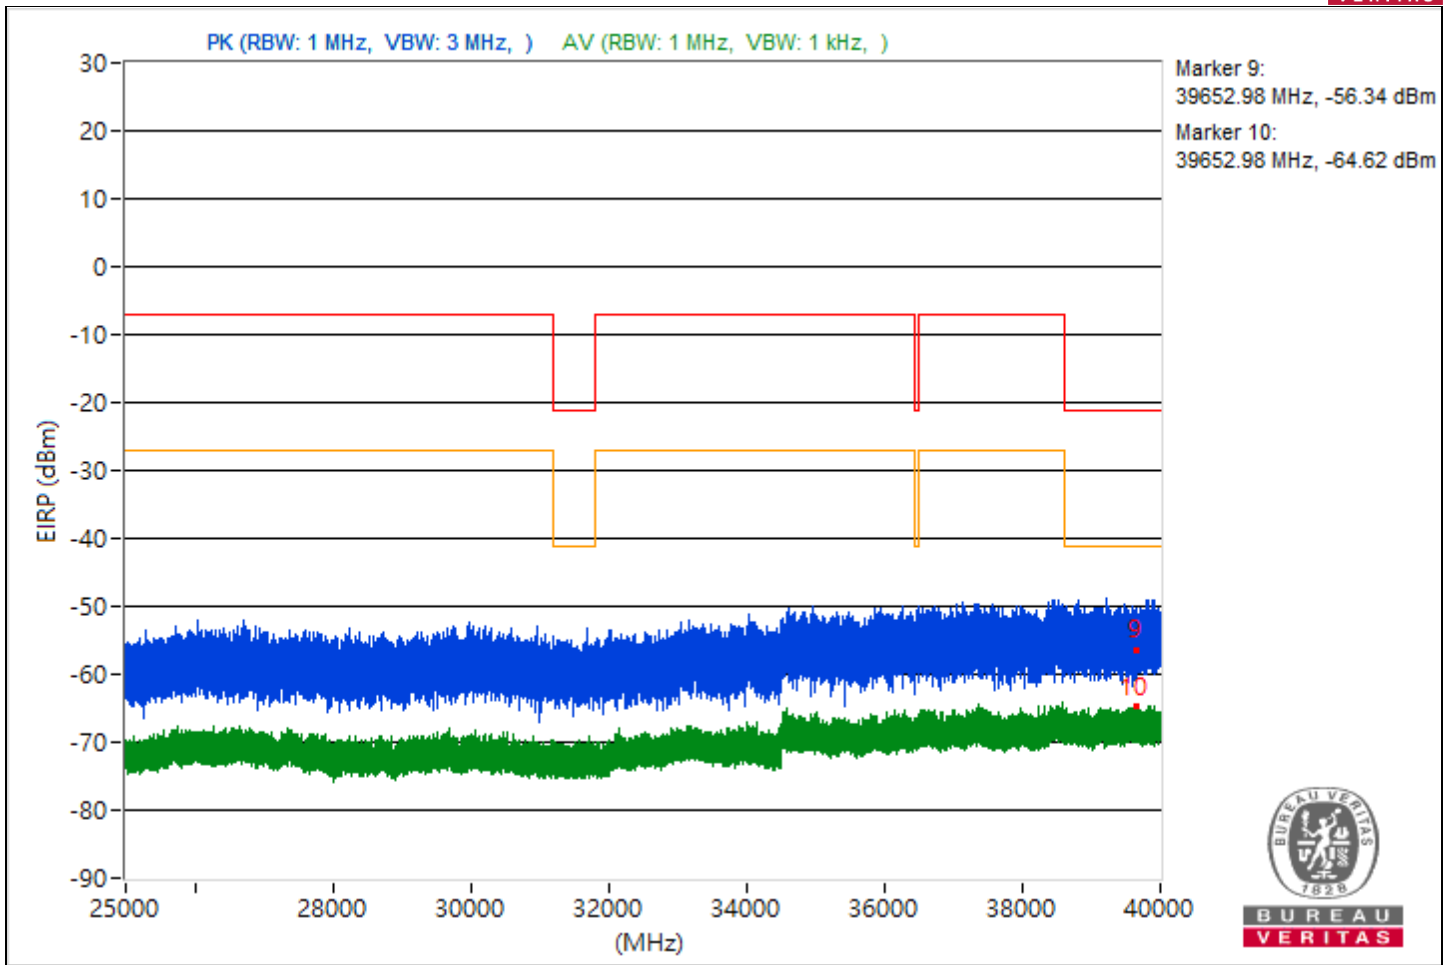


|                 |                  |                          |                 |
|-----------------|------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 7 : 5985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung      |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5453.71         | 46.53 PK                | 74             | -27.47      | -57.1                   | 8.37                   | -48.73           |
| 2                            | 5453.71         | 40.01 AV                | 54             | -13.99      | -63.62                  | 8.37                   | -55.25           |
| 3                            | 11971.38        | 45.65 PK                | 74             | -28.35      | -57.98                  | 8.37                   | -49.61           |
| 4                            | 11971.38        | 39.85 AV                | 54             | -14.15      | -63.78                  | 8.37                   | -55.41           |
| 5                            | 19144.2         | 43.71 PK                | 74             | -30.29      | -59.92                  | 8.37                   | -51.55           |
| 6                            | 19144.2         | 34.68 AV                | 54             | -19.32      | -68.95                  | 8.37                   | -60.58           |
| 7                            | 23973.4         | 45.75 PK                | 74             | -28.25      | -57.88                  | 8.37                   | -49.51           |
| 8                            | 23973.4         | 36.27 AV                | 54             | -17.73      | -67.36                  | 8.37                   | -58.99           |
| 9                            | 39834.22        | 38.01 PK                | 74             | -35.99      | -65.62                  | 8.37                   | -57.25           |
| 10                           | 39834.22        | 30.46 AV                | 54             | -23.54      | -73.17                  | 8.37                   | -64.8            |

Note: Margin value = Emission Level - Limit value

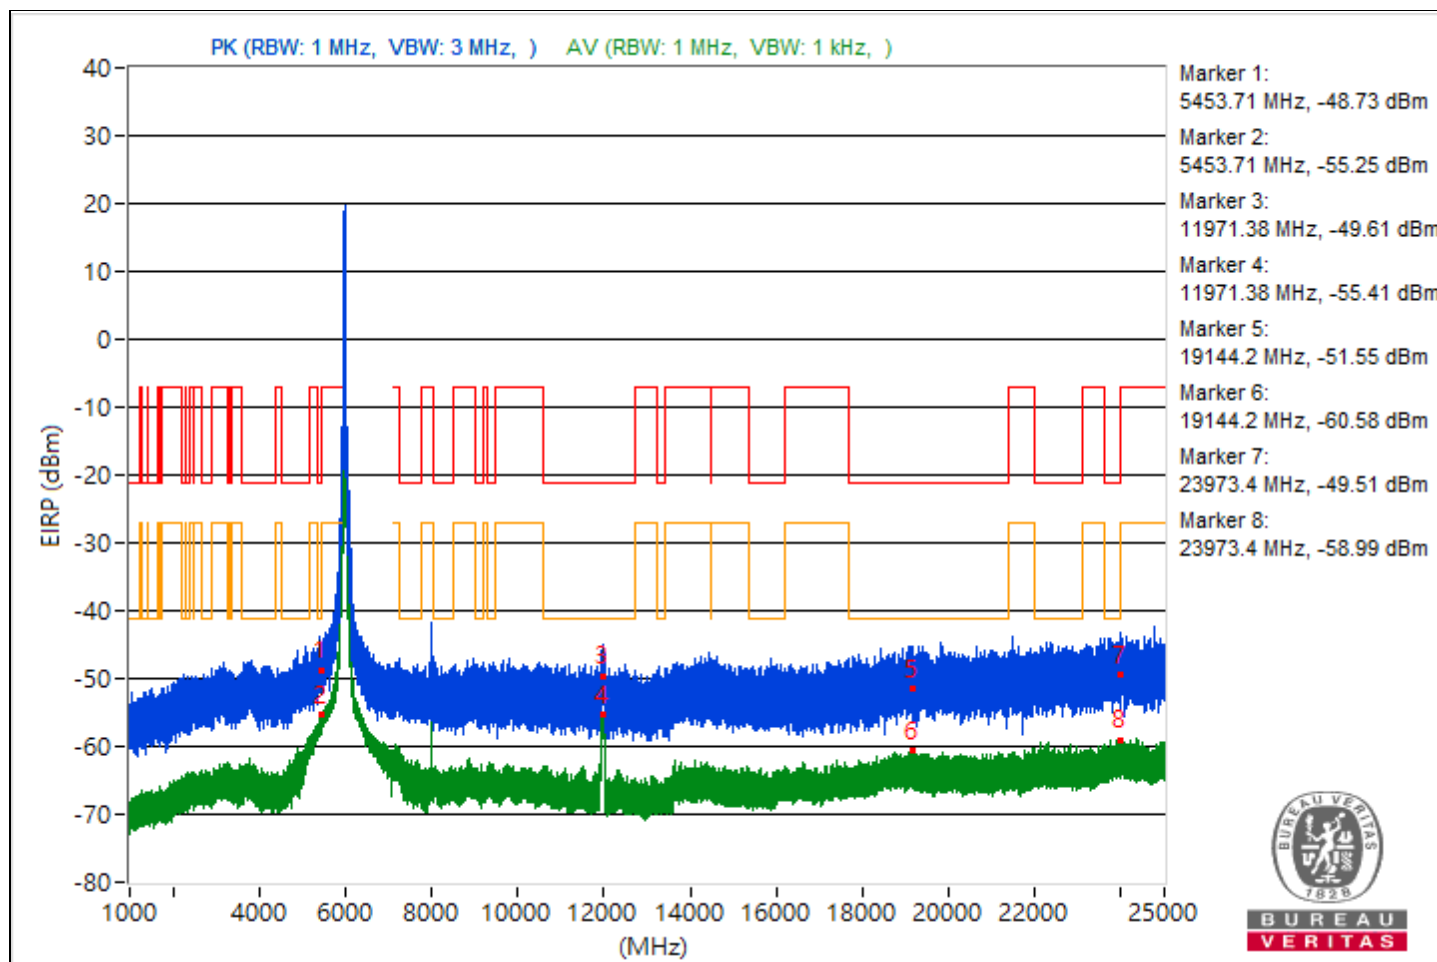


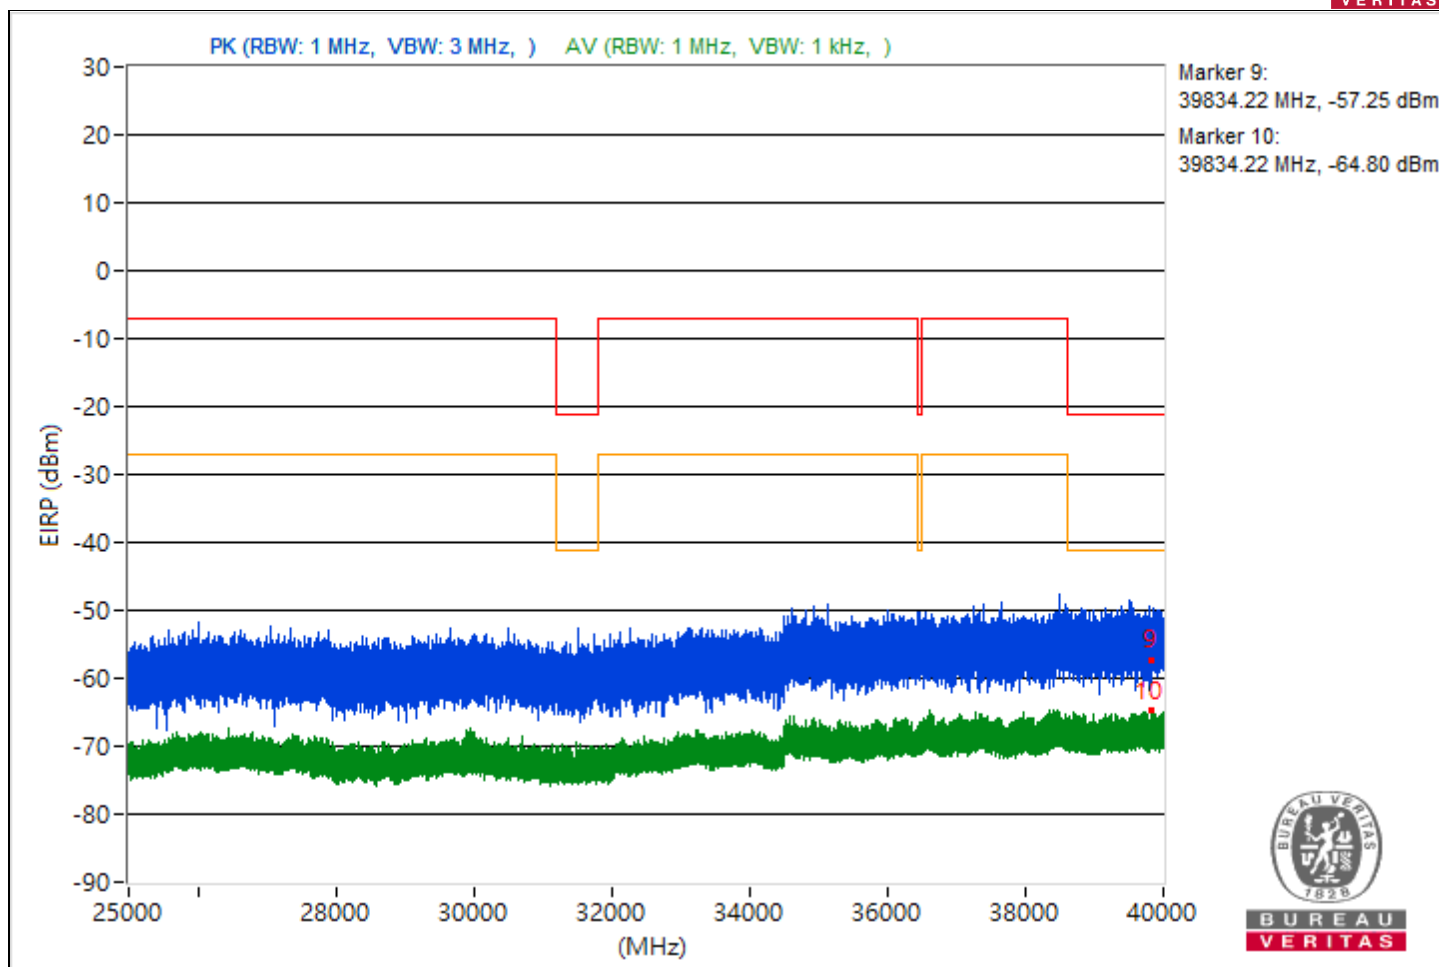


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 39 : 6145 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung      |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459.47         | 43.98 PK                | 74             | -30.02      | -59.65                  | 8.37                   | -51.28           |
| 2                            | 5459.47         | 38.8 AV                 | 54             | -15.2       | -64.83                  | 8.37                   | -56.46           |
| 3                            | 8193.33         | 52.07 PK                | 74             | -21.93      | -51.56                  | 8.37                   | -43.19           |
| 4                            | 8193.33         | 49.65 AV                | 54             | -4.35       | -53.98                  | 8.37                   | -45.61           |
| 5                            | 19078.2         | 44.71 PK                | 74             | -29.29      | -58.92                  | 8.37                   | -50.55           |
| 6                            | 19078.2         | 34.78 AV                | 54             | -19.22      | -68.85                  | 8.37                   | -60.48           |
| 7                            | 23937           | 47.52 PK                | 74             | -26.48      | -56.11                  | 8.37                   | -47.74           |
| 8                            | 23937           | 36.24 AV                | 54             | -17.76      | -67.39                  | 8.37                   | -59.02           |
| 9                            | 39980.89        | 41.15 PK                | 74             | -32.85      | -62.48                  | 8.37                   | -54.11           |
| 10                           | 39980.89        | 31.23 AV                | 54             | -22.77      | -72.4                   | 8.37                   | -64.03           |

Note: Margin value = Emission Level - Limit value

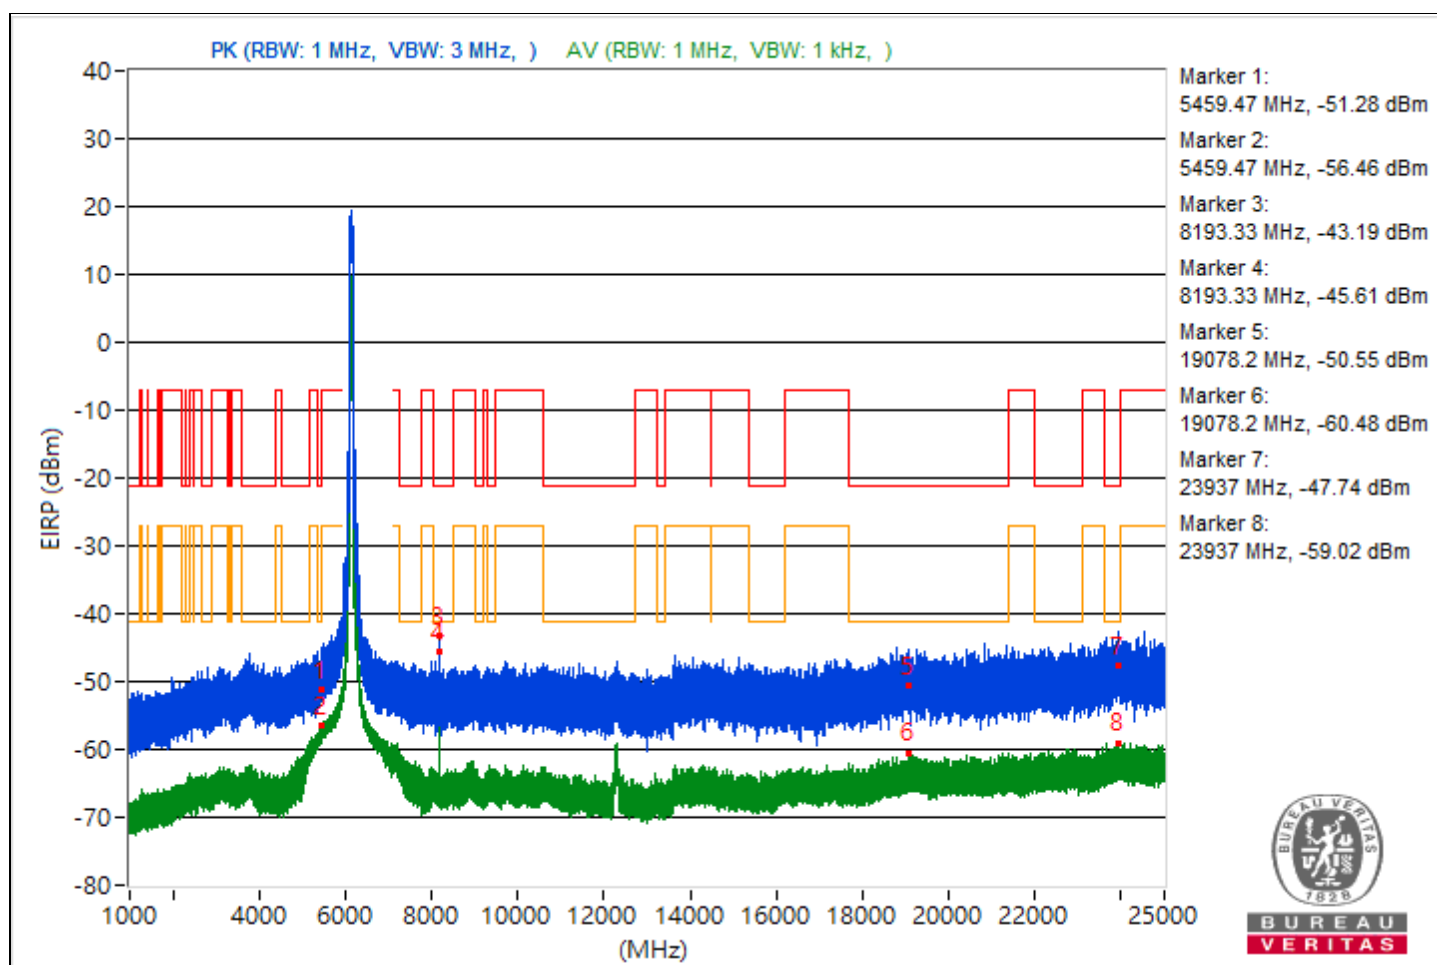


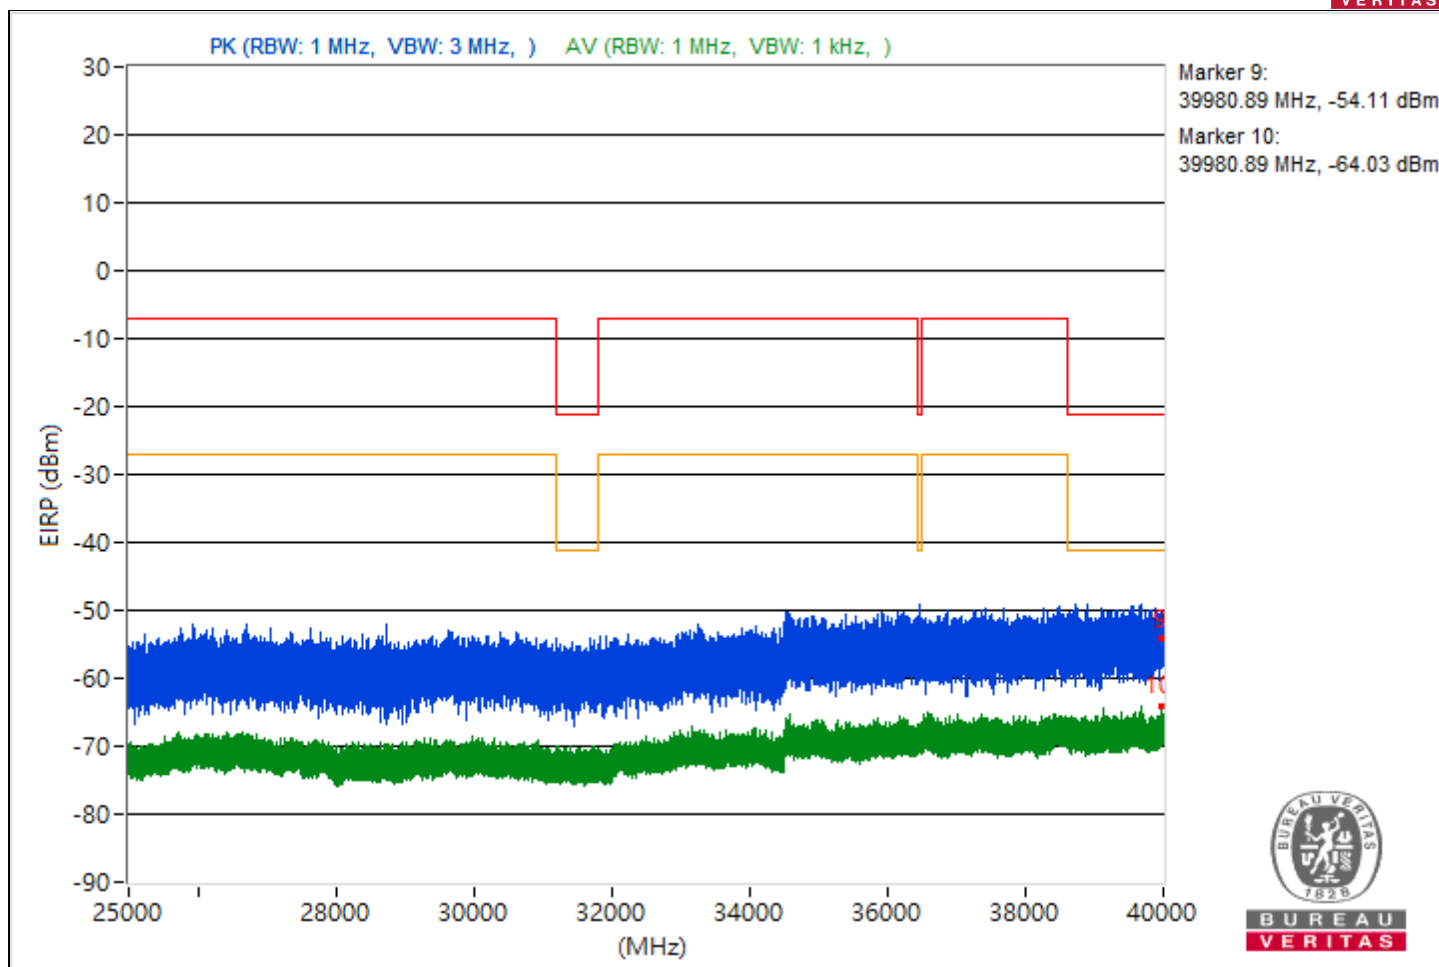


|                 |                  |                          |                  |
|-----------------|------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 87 : 6385 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung      |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459.08         | 45.18 PK                | 74             | -28.82      | -58.45                  | 8.37                   | -50.08           |
| 2                            | 5459.08         | 38.36 AV                | 54             | -15.64      | -65.27                  | 8.37                   | -56.9            |
| 3                            | 7254.11         | 44.42 PK                | 74             | -29.58      | -59.21                  | 8.37                   | -50.84           |
| 4                            | 7254.11         | 36.7 AV                 | 54             | -17.3       | -66.93                  | 8.37                   | -58.56           |
| 5                            | 19114           | 43.88 PK                | 74             | -30.12      | -59.75                  | 8.37                   | -51.38           |
| 6                            | 19114           | 34.96 AV                | 54             | -19.04      | -68.67                  | 8.37                   | -60.3            |
| 7                            | 23892.1         | 46.89 PK                | 74             | -27.11      | -56.74                  | 8.37                   | -48.37           |
| 8                            | 23892.1         | 36.34 AV                | 54             | -17.66      | -67.29                  | 8.37                   | -58.92           |
| 9                            | 39681.69        | 42.71 PK                | 74             | -31.29      | -60.92                  | 8.37                   | -52.55           |
| 10                           | 39681.69        | 30.76 AV                | 54             | -23.24      | -72.87                  | 8.37                   | -64.5            |

Note: Margin value = Emission Level - Limit value

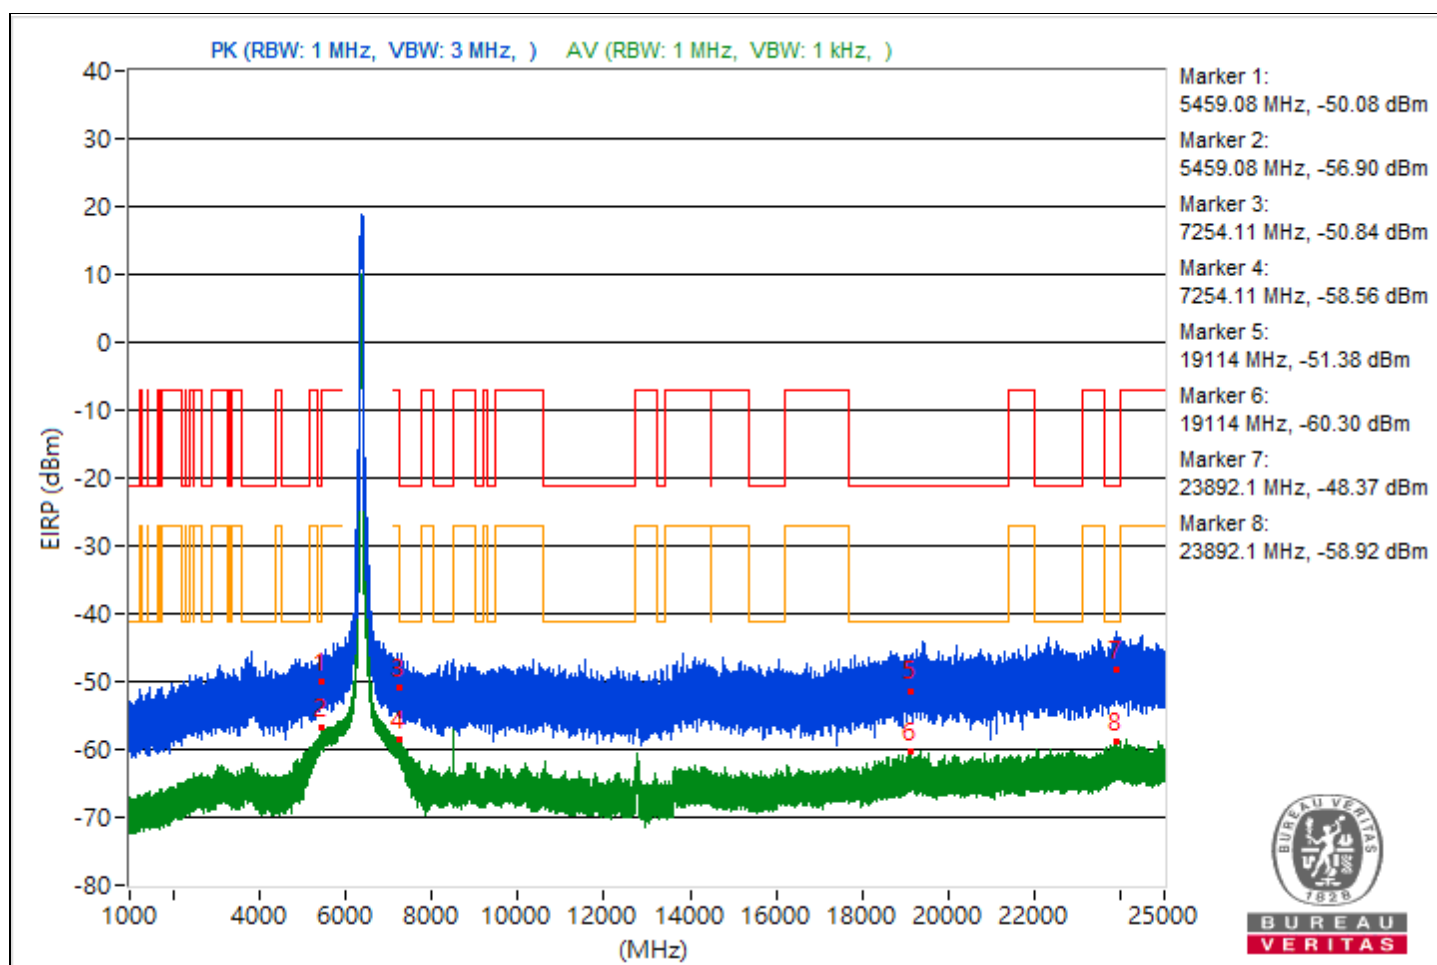


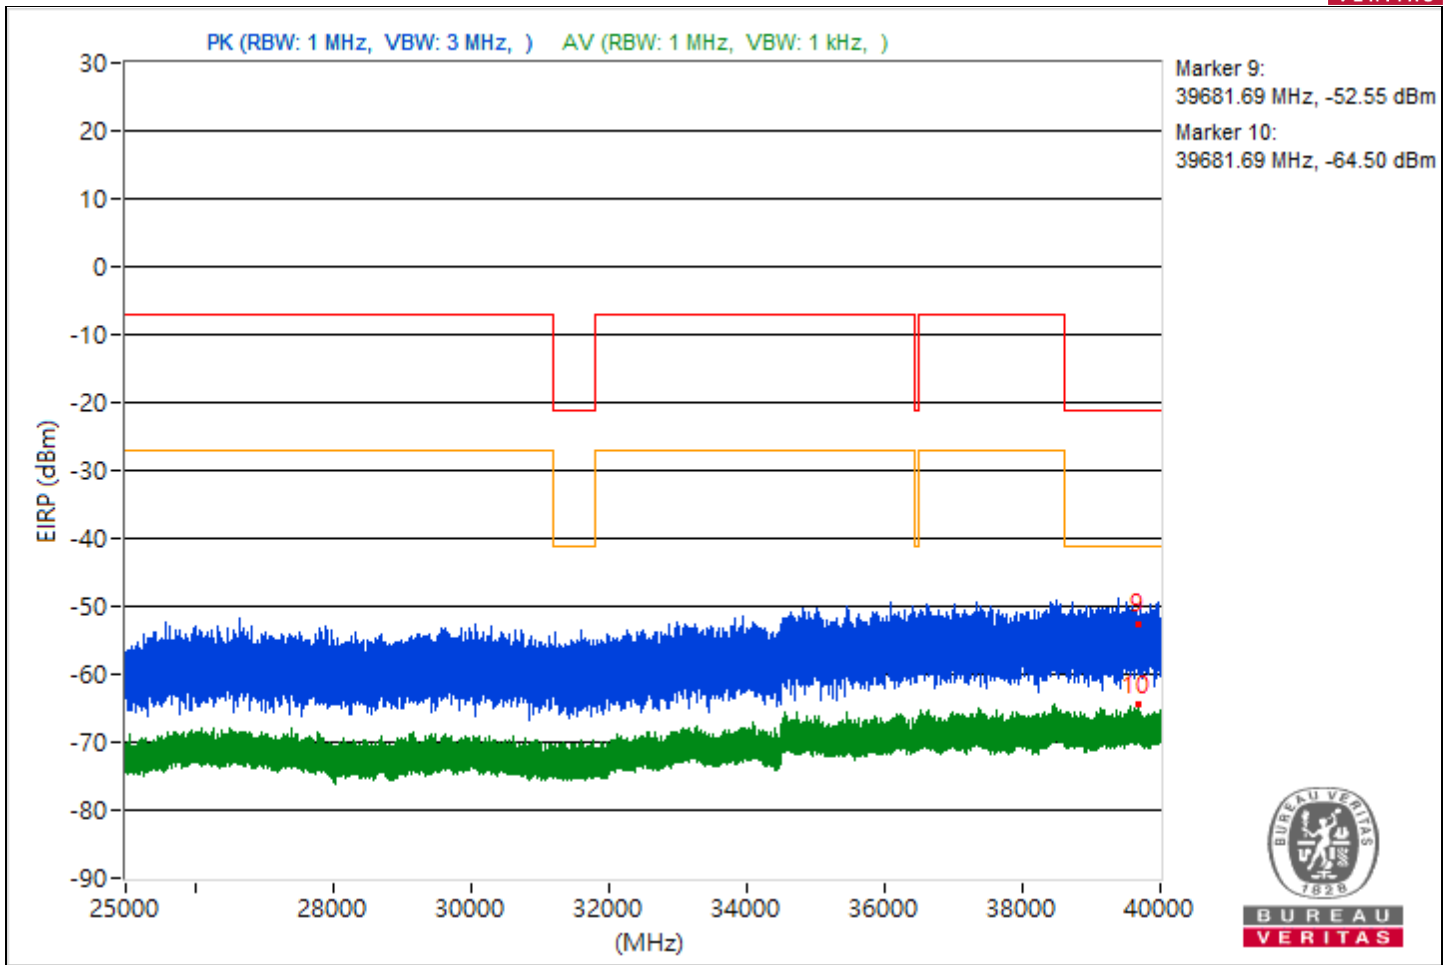


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 135 : 6625 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5434.97         | 44.26 PK                | 74             | -29.74      | -59.37                  | 8.37                   | -51              |
| 2                            | 5434.97         | 36.57 AV                | 54             | -17.43      | -67.06                  | 8.37                   | -58.69           |
| 3                            | 7251.16         | 44.88 PK                | 74             | -29.12      | -58.75                  | 8.37                   | -50.38           |
| 4                            | 7251.16         | 36.55 AV                | 54             | -17.45      | -67.08                  | 8.37                   | -58.71           |
| 5                            | 21376.8         | 44.72 PK                | 74             | -29.28      | -58.91                  | 8.37                   | -50.54           |
| 6                            | 21376.8         | 35.17 AV                | 54             | -18.83      | -68.46                  | 8.37                   | -60.09           |
| 7                            | 23983           | 46.86 PK                | 74             | -27.14      | -56.77                  | 8.37                   | -48.4            |
| 8                            | 23983           | 36.98 AV                | 54             | -17.02      | -66.65                  | 8.37                   | -58.28           |
| 9                            | 39592.36        | 40.82 PK                | 74             | -33.18      | -62.81                  | 8.37                   | -54.44           |
| 10                           | 39592.36        | 31.03 AV                | 54             | -22.97      | -72.6                   | 8.37                   | -64.23           |

Note: Margin value = Emission Level - Limit value

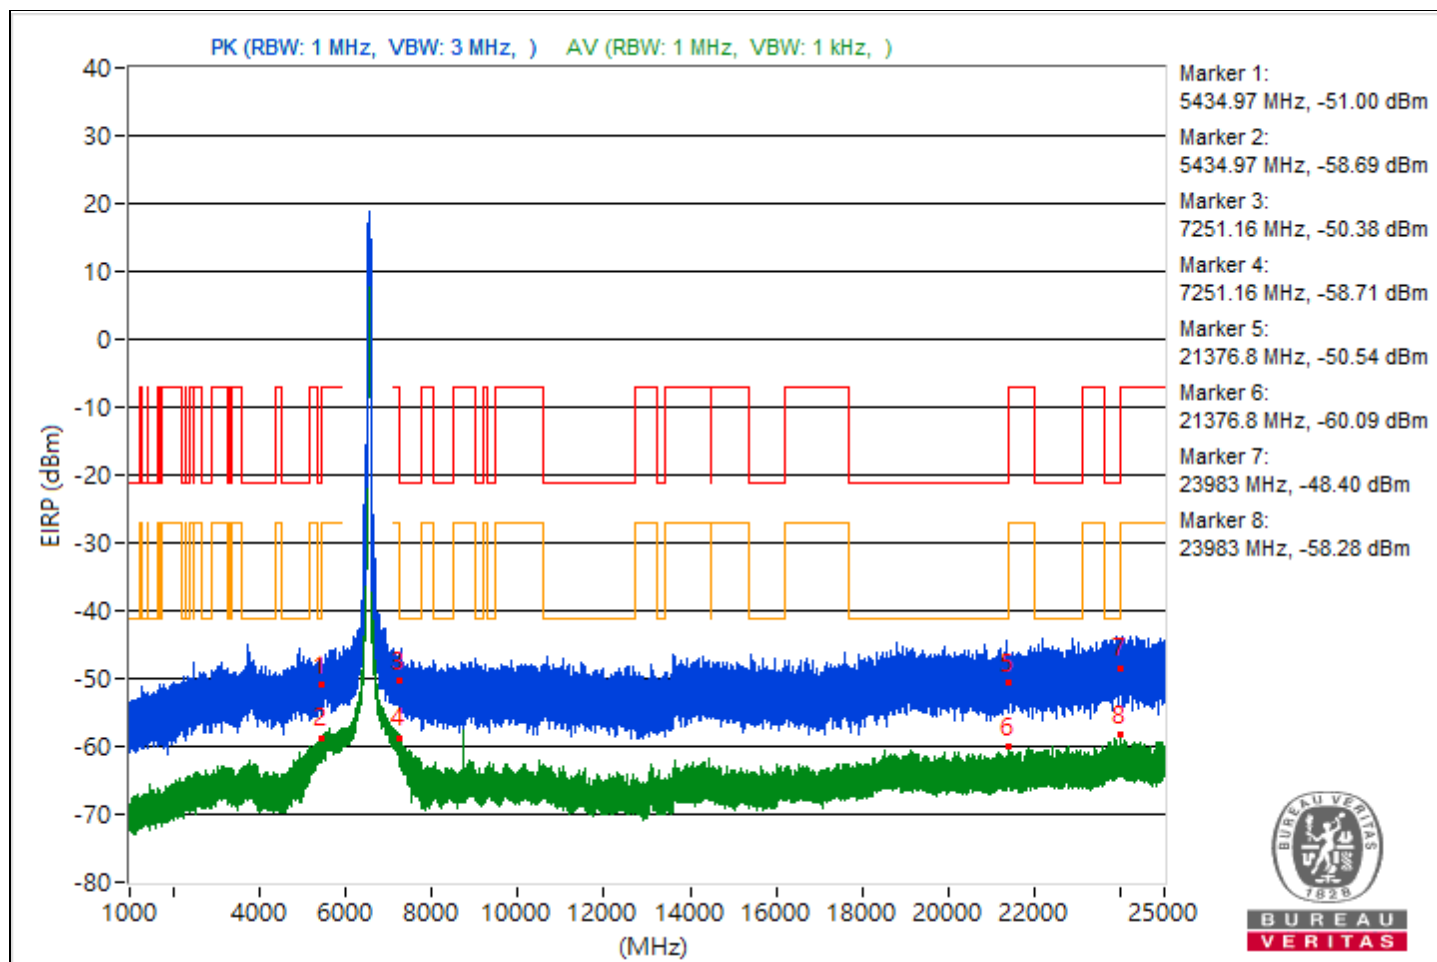


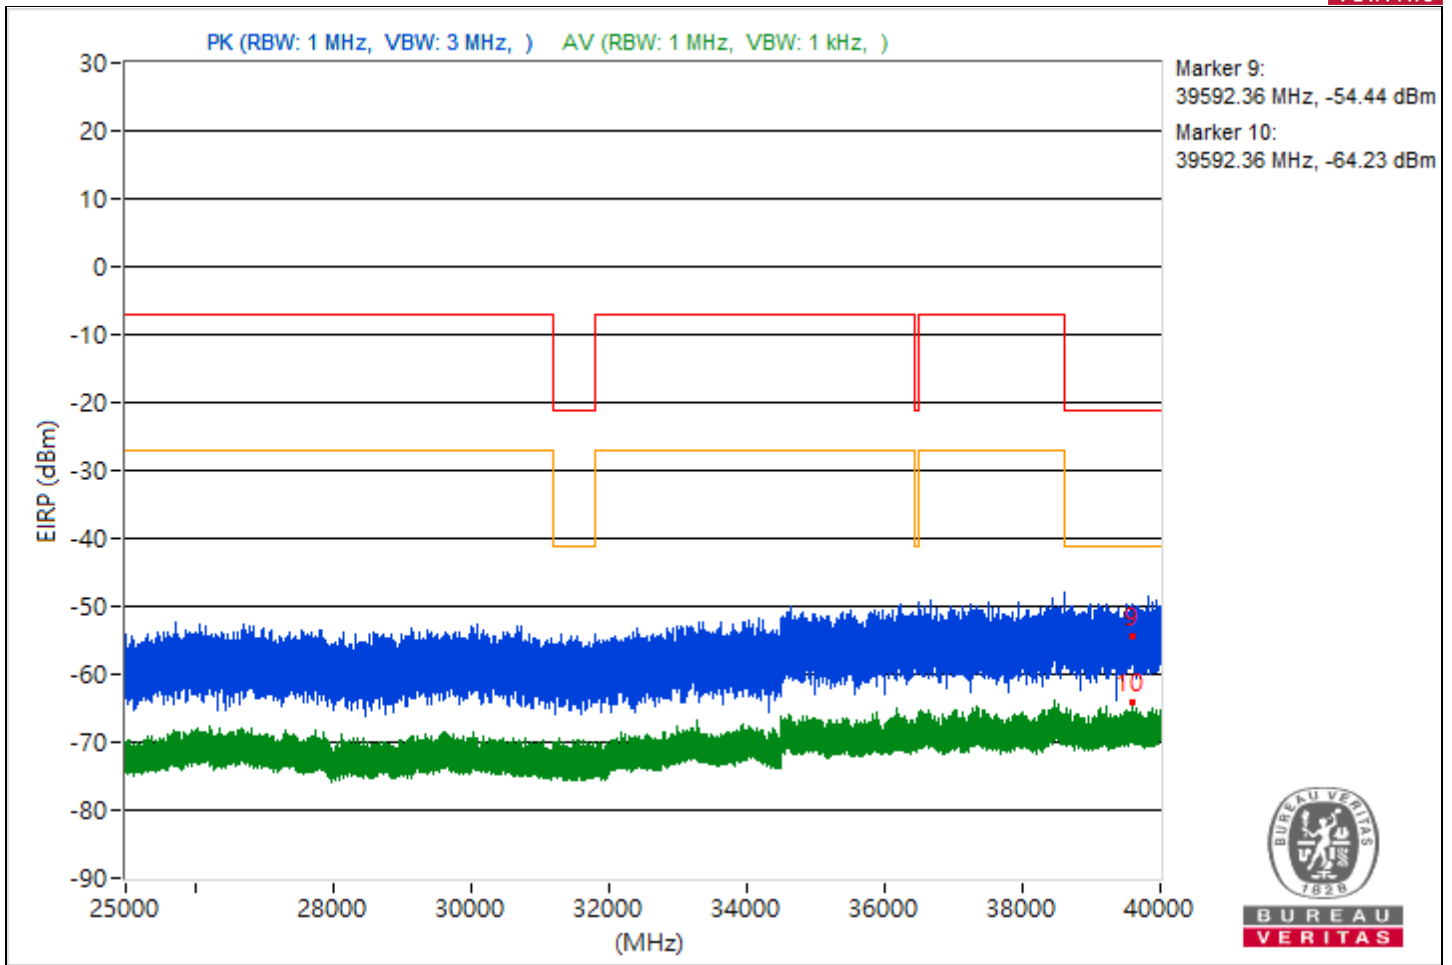


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 151 : 6705 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5404.56         | 42.75 PK                | 74             | -31.25      | -60.88                  | 8.37                   | -52.51           |
| 2                            | 5404.56         | 35.96 AV                | 54             | -18.04      | -67.67                  | 8.37                   | -59.3            |
| 3                            | 7254.34         | 43.79 PK                | 74             | -30.21      | -59.84                  | 8.37                   | -51.47           |
| 4                            | 7254.34         | 38.12 AV                | 54             | -15.88      | -65.51                  | 8.37                   | -57.14           |
| 5                            | 21356.6         | 46.19 PK                | 74             | -27.81      | -57.44                  | 8.37                   | -49.07           |
| 6                            | 21356.6         | 35.03 AV                | 54             | -18.97      | -68.6                   | 8.37                   | -60.23           |
| 7                            | 23974.5         | 47.82 PK                | 74             | -26.18      | -55.81                  | 8.37                   | -47.44           |
| 8                            | 23974.5         | 36.19 AV                | 54             | -17.81      | -67.44                  | 8.37                   | -59.07           |
| 9                            | 39194.84        | 40.66 PK                | 74             | -33.34      | -62.97                  | 8.37                   | -54.6            |
| 10                           | 39194.84        | 30.43 AV                | 54             | -23.57      | -73.2                   | 8.37                   | -64.83           |

Note: Margin value = Emission Level - Limit value

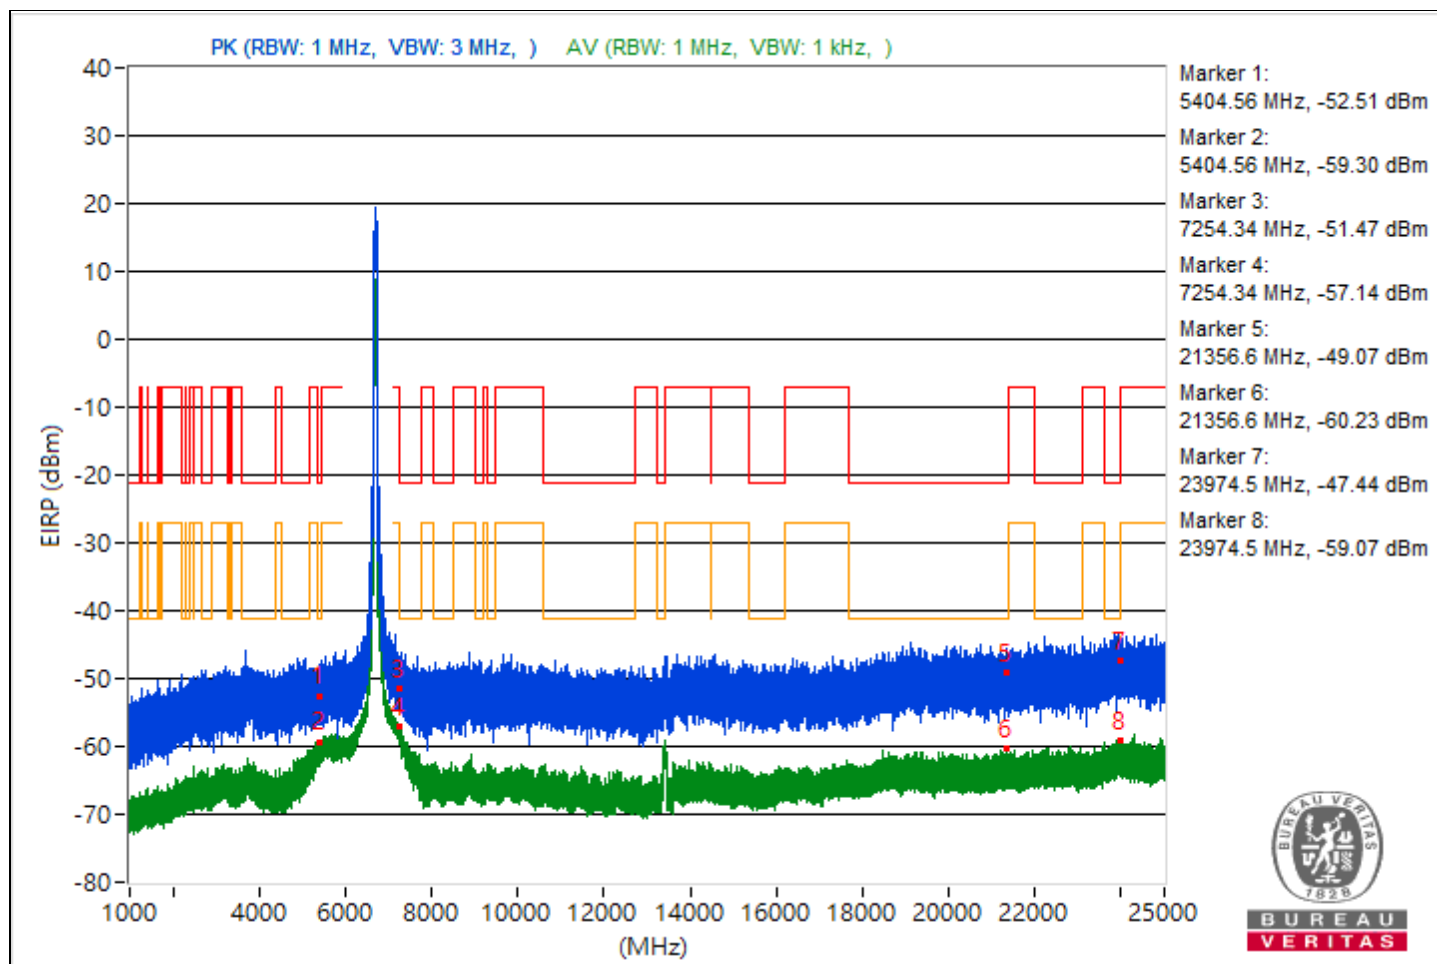


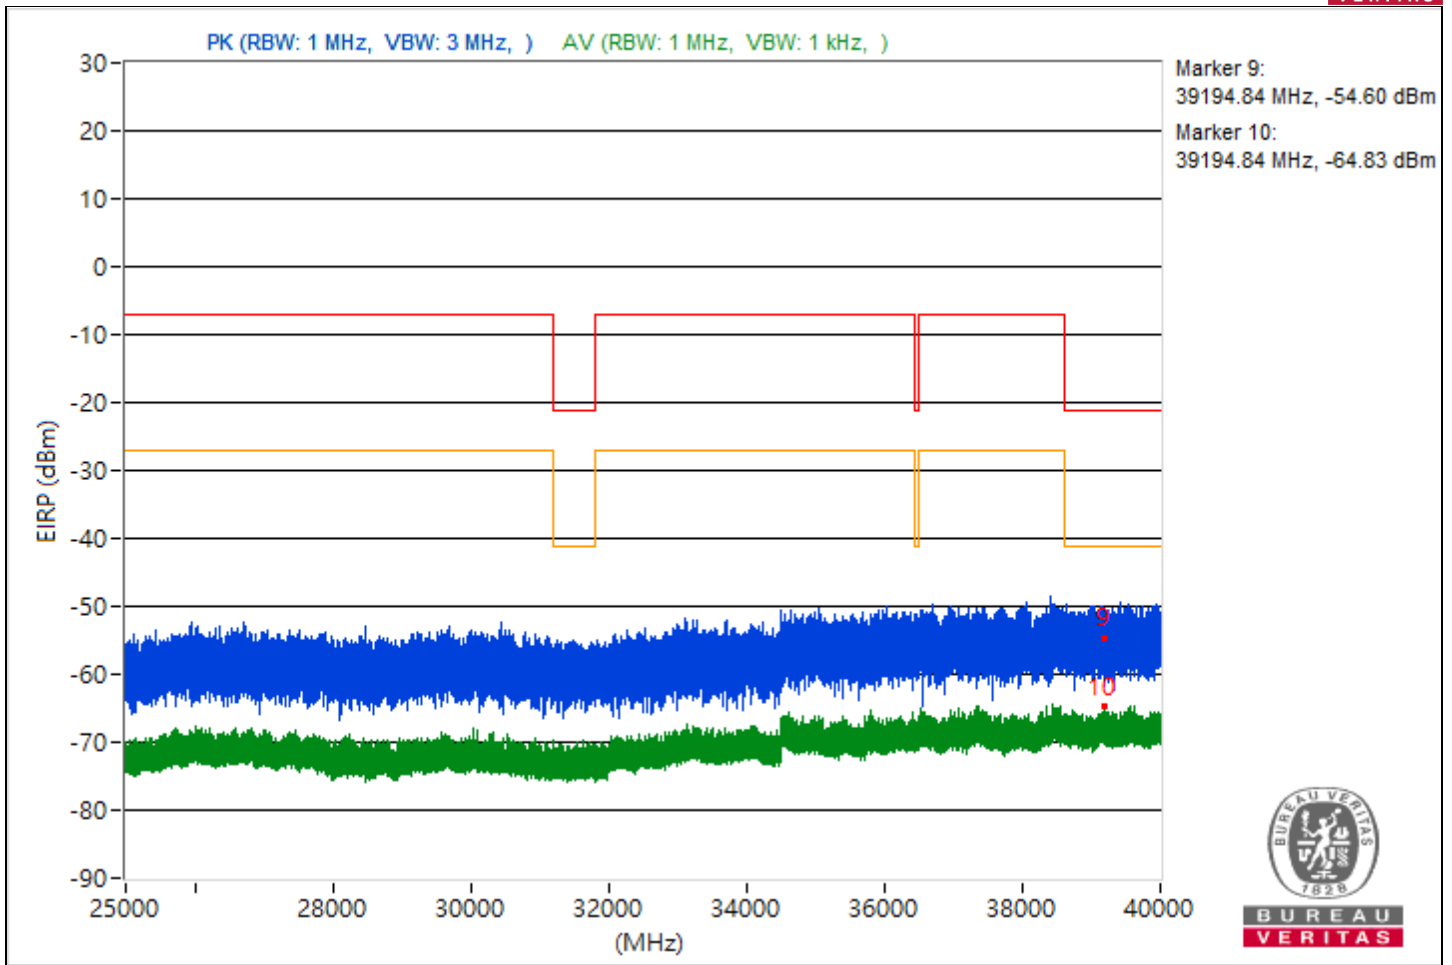


|                 |                  |                          |                   |
|-----------------|------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) | Channel                  | CH 167 : 6785 MHz |
| Frequency Range | 1 GHz ~ 40 GHz   | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung      |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5413.34         | 43.25 PK                | 74             | -30.75      | -60.38                  | 8.37                   | -52.01           |
| 2                            | 5413.34         | 35.64 AV                | 54             | -18.36      | -67.99                  | 8.37                   | -59.62           |
| 3                            | 7250.07         | 47.06 PK                | 74             | -26.94      | -56.57                  | 8.37                   | -48.2            |
| 4                            | 7250.07         | 39.6 AV                 | 54             | -14.4       | -64.03                  | 8.37                   | -55.66           |
| 5                            | 19066           | 46 PK                   | 74             | -28         | -57.63                  | 8.37                   | -49.26           |
| 6                            | 19066           | 35.15 AV                | 54             | -18.85      | -68.48                  | 8.37                   | -60.11           |
| 7                            | 23873.9         | 46.17 PK                | 74             | -27.83      | -57.46                  | 8.37                   | -49.09           |
| 8                            | 23873.9         | 35.94 AV                | 54             | -18.06      | -67.69                  | 8.37                   | -59.32           |
| 9                            | 39998.84        | 40.83 PK                | 74             | -33.17      | -62.8                   | 8.37                   | -54.43           |
| 10                           | 39998.84        | 30.89 AV                | 54             | -23.11      | -72.74                  | 8.37                   | -64.37           |

Note: Margin value = Emission Level - Limit value

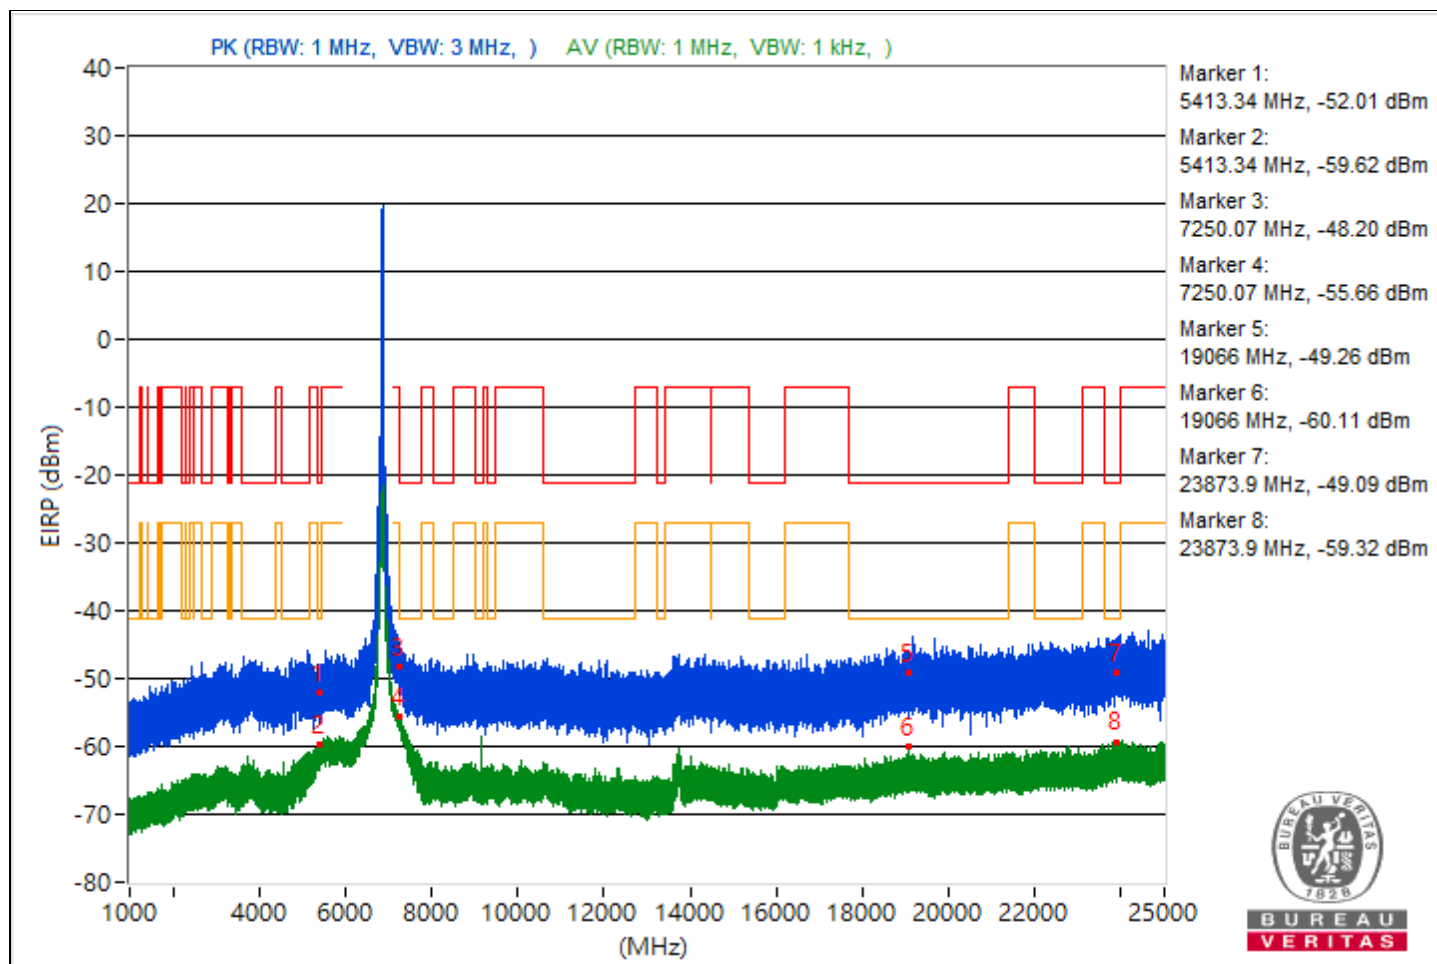

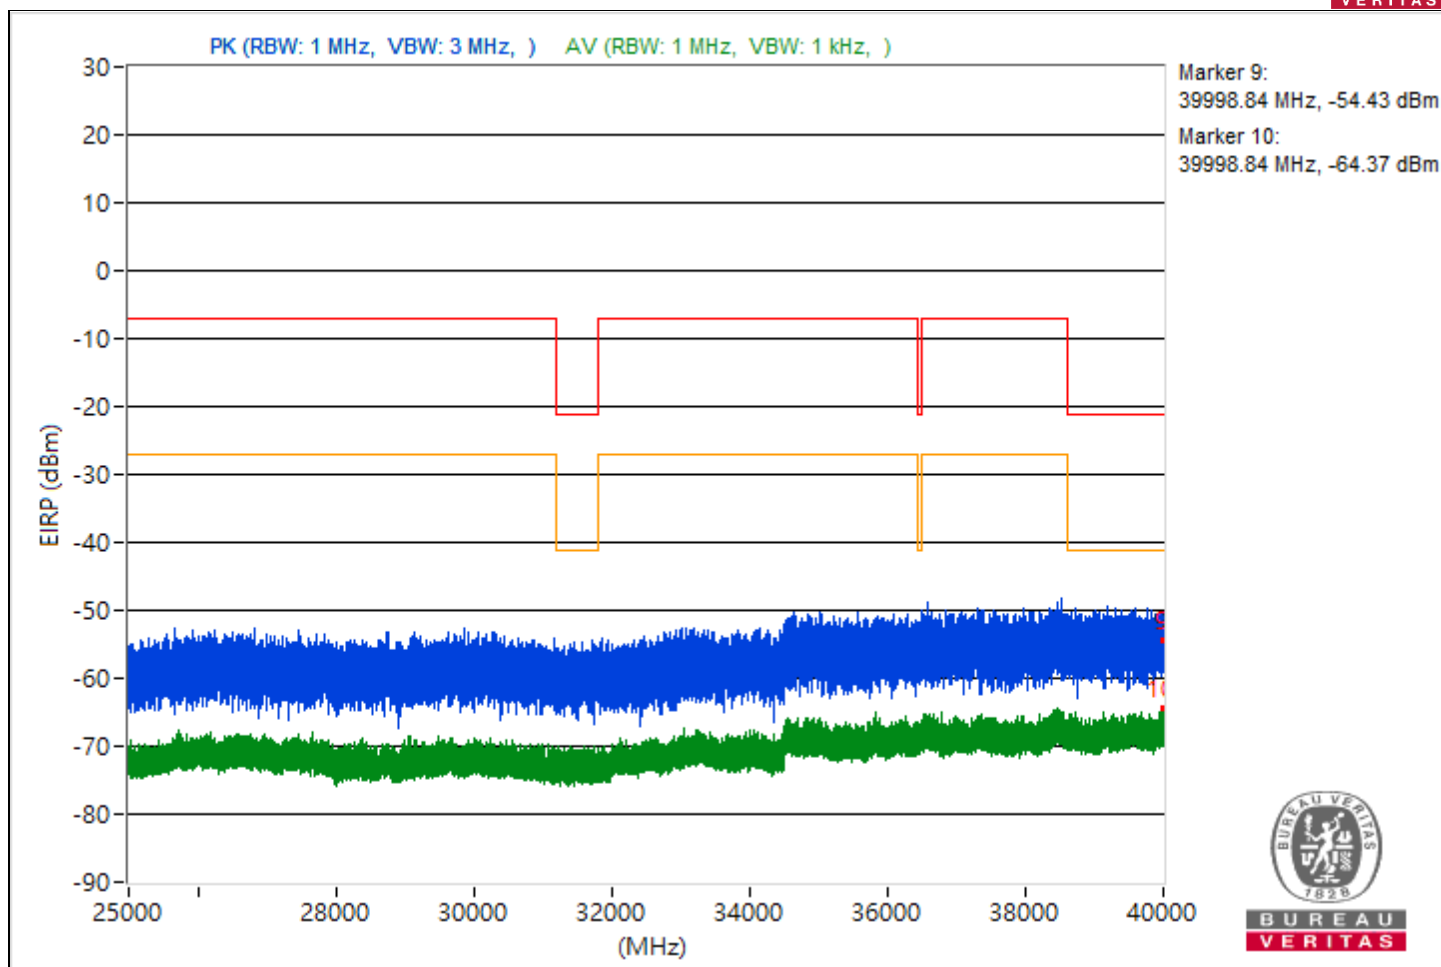



|                 |                   |                          |                  |
|-----------------|-------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) | Channel                  | CH 15 : 6025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz    | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung       |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | #5874.64        | 65.25 PK                | 88.26          | -23.01      | -38.38                  | 8.37                   | -30.01           |
| 2                            | #5874.64        | 56.84 AV                | 68.26          | -11.42      | -46.79                  | 8.37                   | -38.42           |
| 3                            | 8033.42         | 53.95 PK                | 74             | -20.05      | -49.68                  | 8.37                   | -41.31           |
| 4                            | 8033.42         | 51.22 AV                | 54             | -2.78       | -52.41                  | 8.37                   | -44.04           |
| 5                            | 20715.6         | 42.06 PK                | 74             | -31.94      | -61.57                  | 8.37                   | -53.2            |
| 6                            | 20715.6         | 34.76 AV                | 54             | -19.24      | -68.87                  | 8.37                   | -60.5            |
| 7                            | 23960.4         | 46.74 PK                | 74             | -27.26      | -56.89                  | 8.37                   | -48.52           |
| 8                            | 23960.4         | 36.07 AV                | 54             | -17.93      | -67.56                  | 8.37                   | -59.19           |
| 9                            | 39680.98        | 40.84 PK                | 74             | -33.16      | -62.79                  | 8.37                   | -54.42           |
| 10                           | 39680.98        | 30.49 AV                | 54             | -23.51      | -73.14                  | 8.37                   | -64.77           |

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

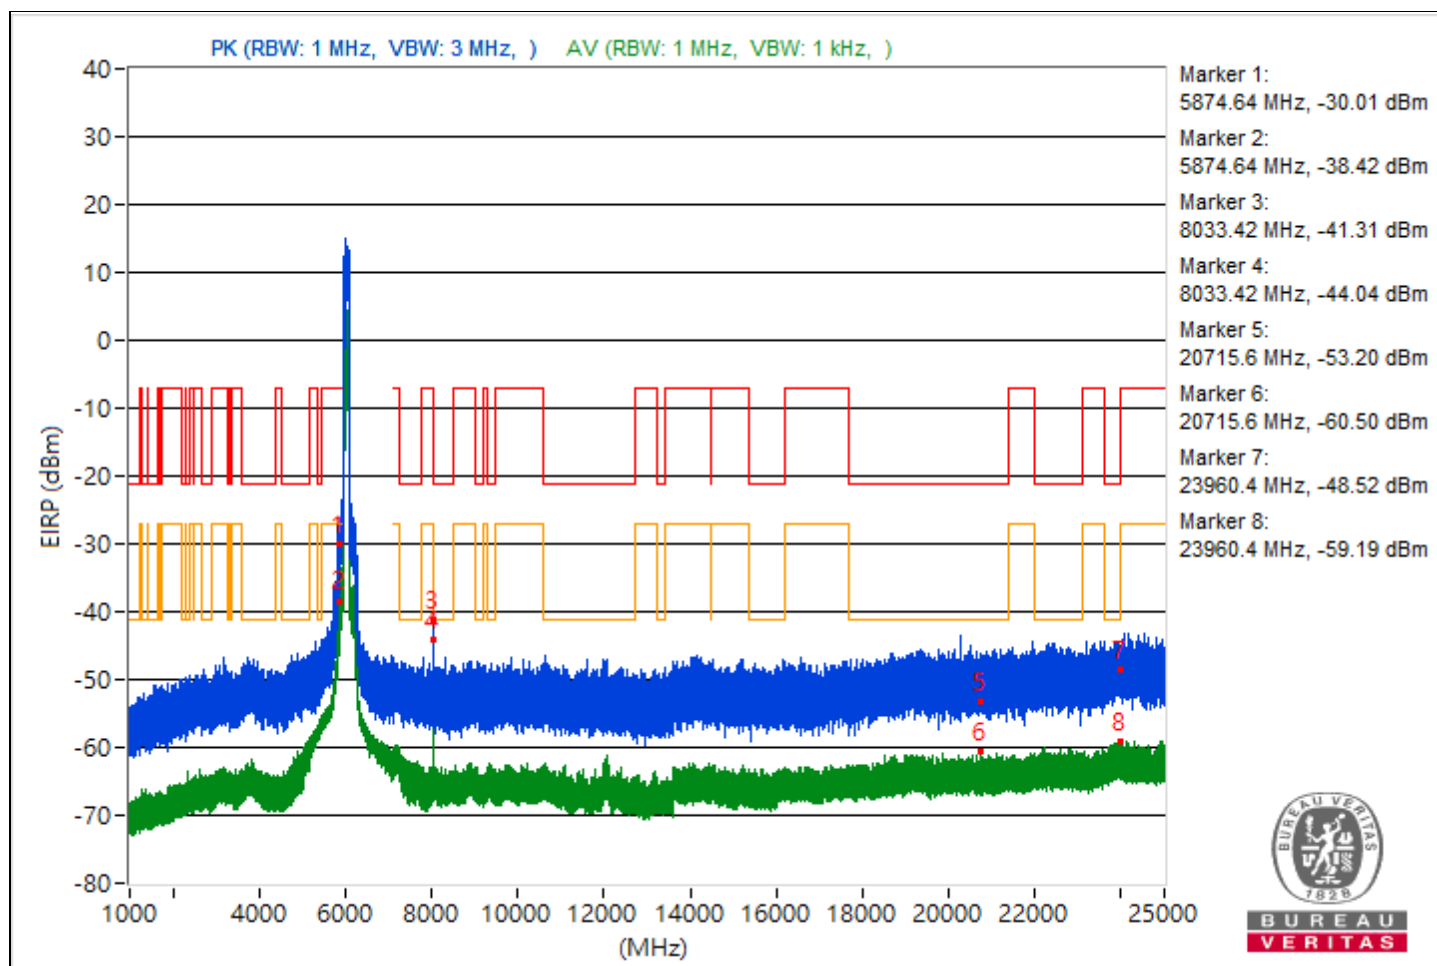


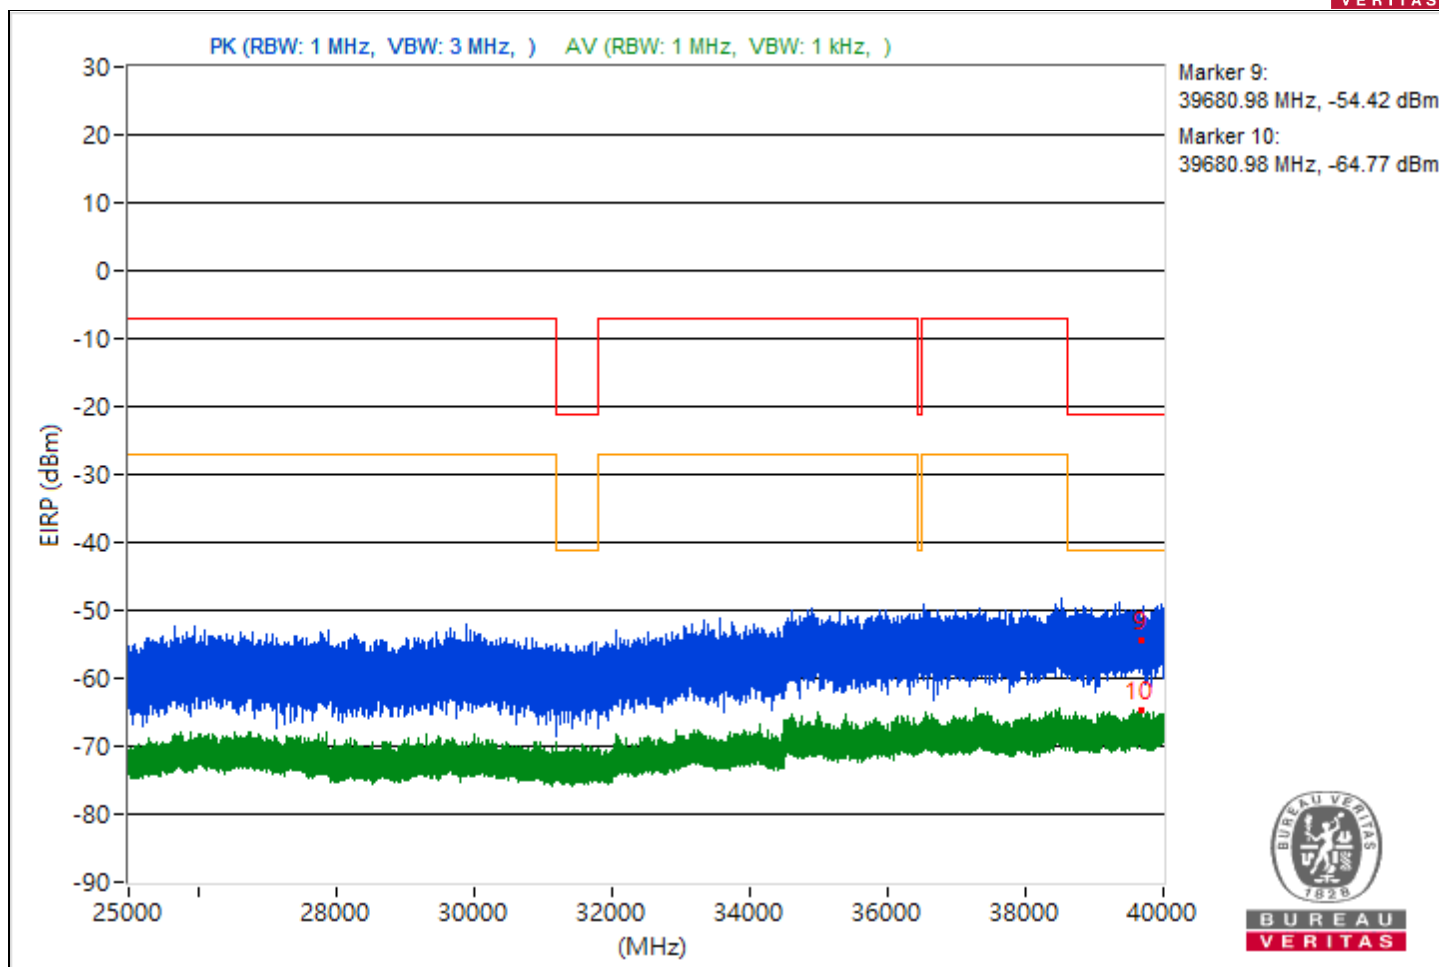


|                 |                   |                          |                  |
|-----------------|-------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) | Channel                  | CH 47 : 6185 MHz |
| Frequency Range | 1 GHz ~ 40 GHz    | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung       |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5445            | 48.35 PK                | 74             | -25.65      | -55.28                  | 8.37                   | -46.91           |
| 2                            | 5445            | 38.66 AV                | 54             | -15.34      | -64.97                  | 8.37                   | -56.6            |
| 3                            | 8246.76         | 50.89 PK                | 74             | -23.11      | -52.74                  | 8.37                   | -44.37           |
| 4                            | 8246.76         | 48.32 AV                | 54             | -5.68       | -55.31                  | 8.37                   | -46.94           |
| 5                            | 20570.2         | 45.94 PK                | 74             | -28.06      | -57.69                  | 8.37                   | -49.32           |
| 6                            | 20570.2         | 35.21 AV                | 54             | -18.79      | -68.42                  | 8.37                   | -60.05           |
| 7                            | 23975.6         | 45.99 PK                | 74             | -28.01      | -57.64                  | 8.37                   | -49.27           |
| 8                            | 23975.6         | 35.99 AV                | 54             | -18.01      | -67.64                  | 8.37                   | -59.27           |
| 9                            | 38821.87        | 40.95 PK                | 74             | -33.05      | -62.68                  | 8.37                   | -54.31           |
| 10                           | 38821.87        | 30.42 AV                | 54             | -23.58      | -73.21                  | 8.37                   | -64.84           |

Note: Margin value = Emission Level - Limit value

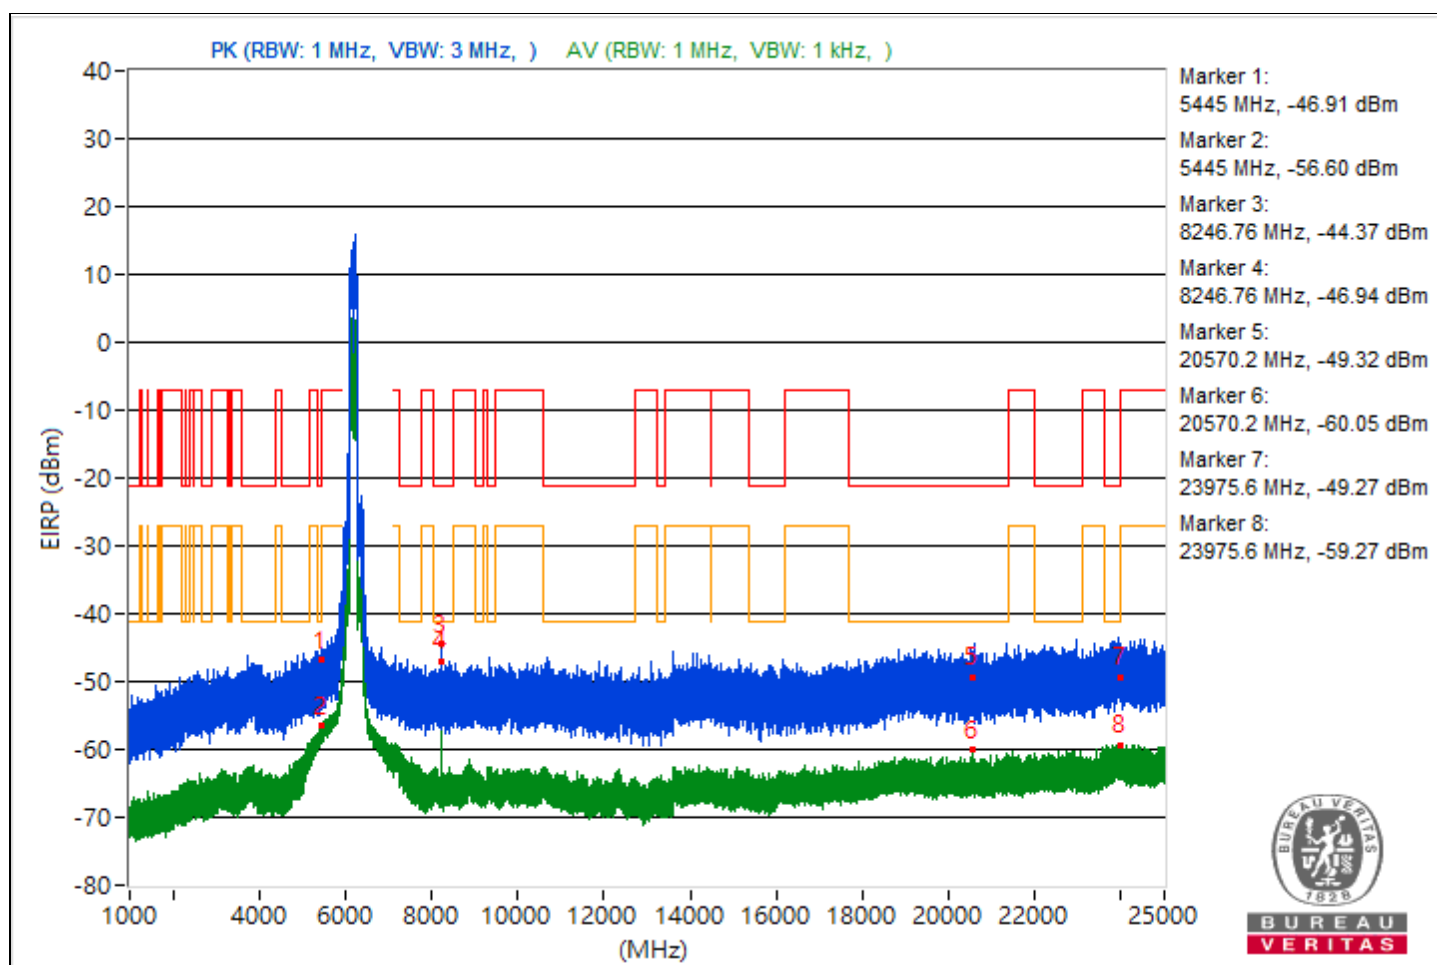


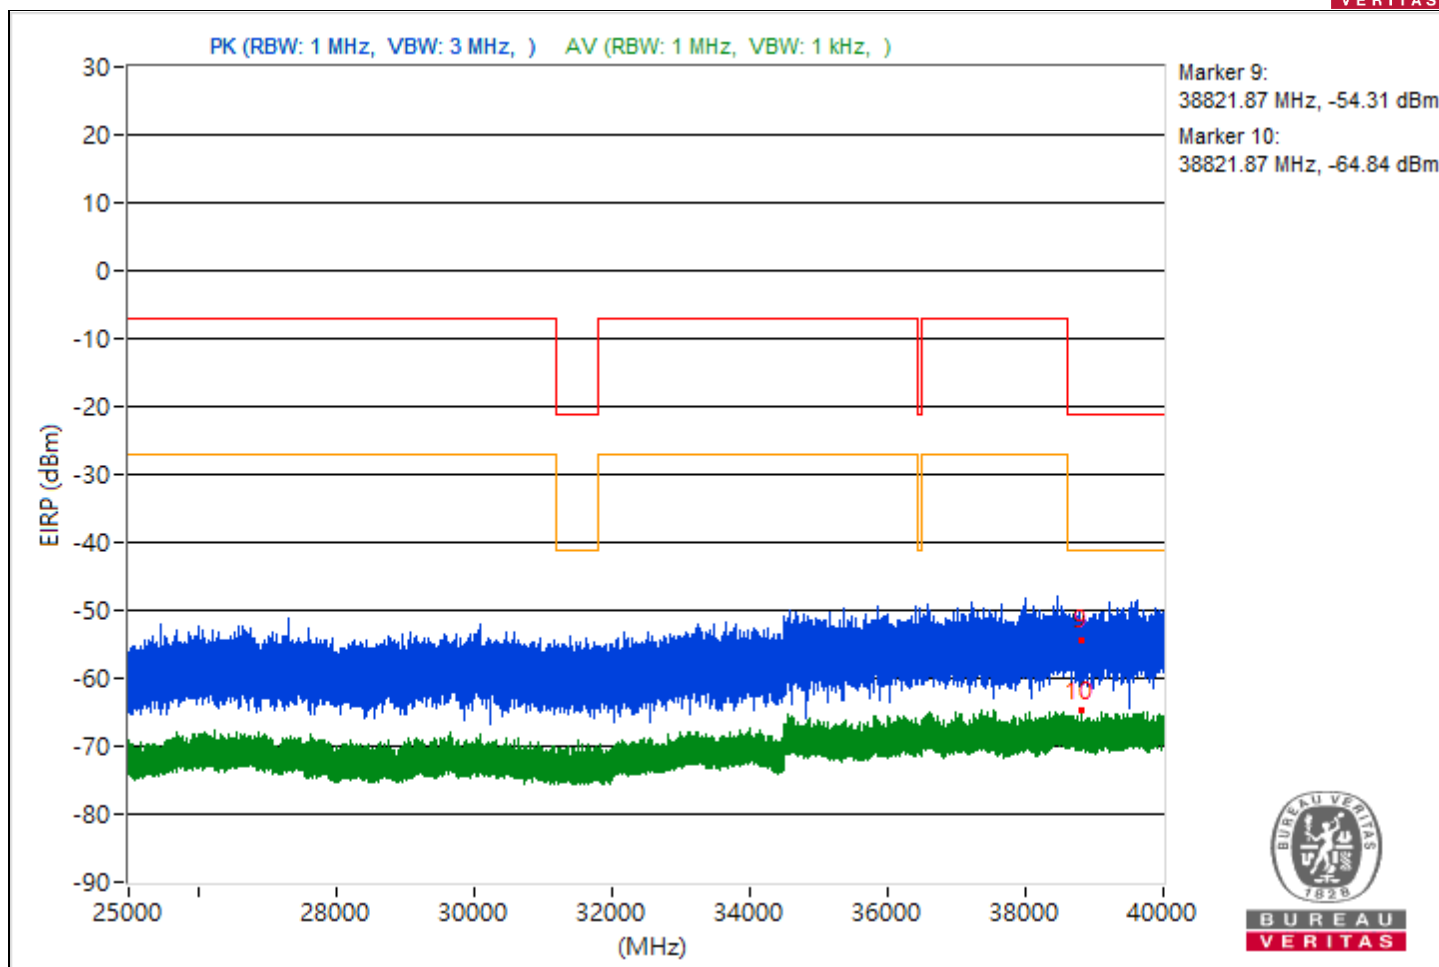


|                 |                   |                          |                  |
|-----------------|-------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) | Channel                  | CH 79 : 6345 MHz |
| Frequency Range | 1 GHz ~ 40 GHz    | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung       |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5446.09         | 45.42 PK                | 74             | -28.58      | -58.21                  | 8.37                   | -49.84           |
| 2                            | 5446.09         | 38.02 AV                | 54             | -15.98      | -65.61                  | 8.37                   | -57.24           |
| 3                            | 8460.09         | 48.46 PK                | 74             | -25.54      | -55.17                  | 8.37                   | -46.8            |
| 4                            | 8460.09         | 45.74 AV                | 54             | -8.26       | -57.89                  | 8.37                   | -49.52           |
| 5                            | 21136.4         | 44.23 PK                | 74             | -29.77      | -59.4                   | 8.37                   | -51.03           |
| 6                            | 21136.4         | 34.71 AV                | 54             | -19.29      | -68.92                  | 8.37                   | -60.55           |
| 7                            | 23770.4         | 48.87 PK                | 74             | -25.13      | -54.76                  | 8.37                   | -46.39           |
| 8                            | 23770.4         | 35.95 AV                | 54             | -18.05      | -67.68                  | 8.37                   | -59.31           |
| 9                            | 39964.62        | 41.63 PK                | 74             | -32.37      | -62                     | 8.37                   | -53.63           |
| 10                           | 39964.62        | 31.62 AV                | 54             | -22.38      | -72.01                  | 8.37                   | -63.64           |

Note: Margin value = Emission Level - Limit value

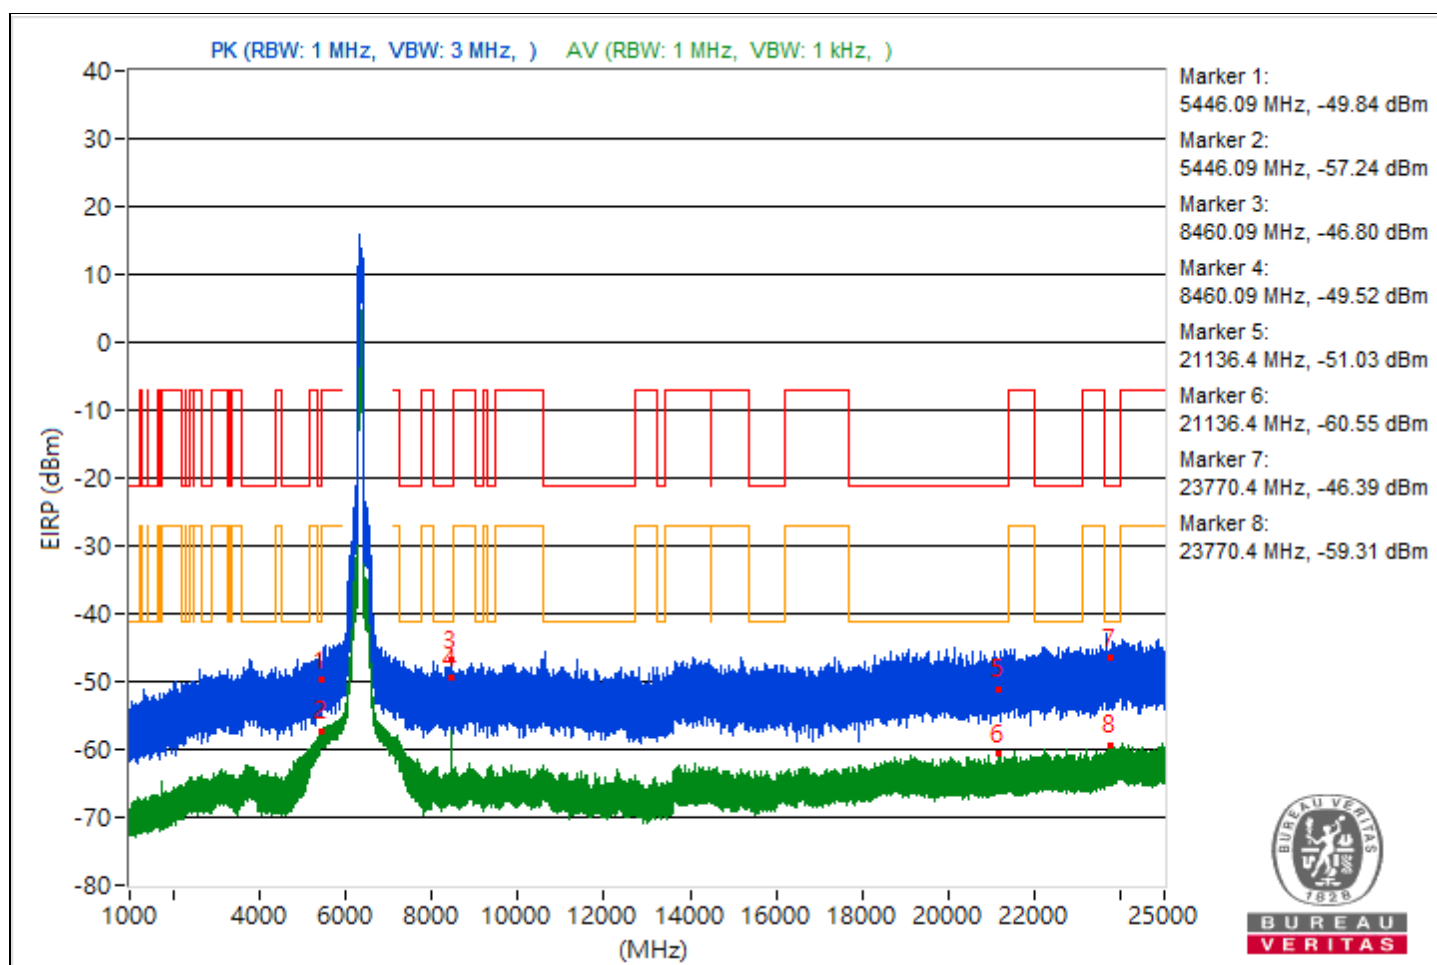


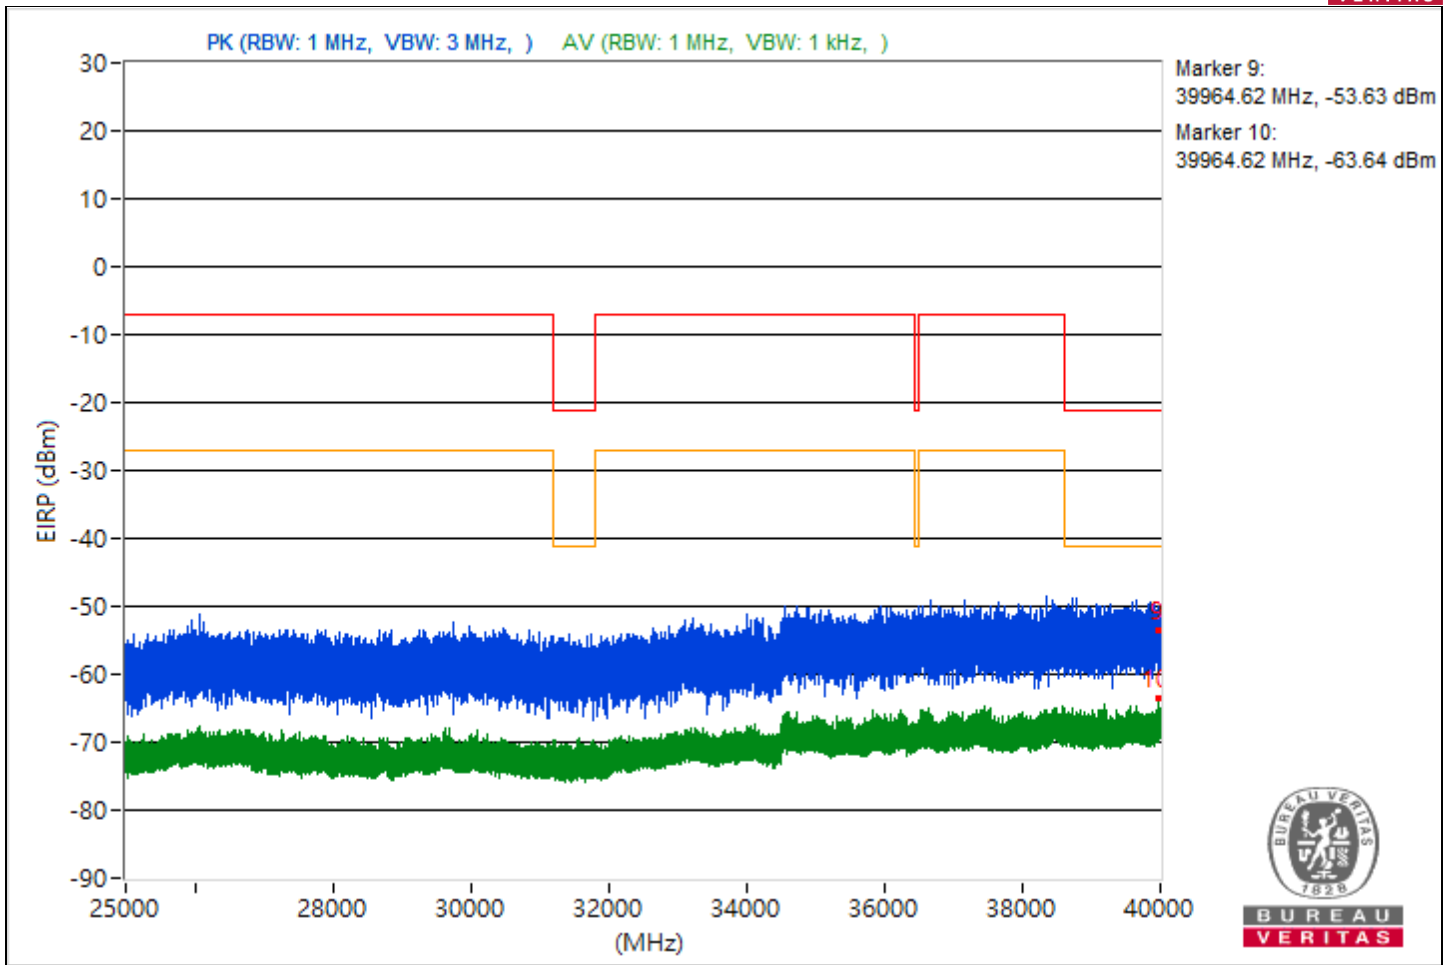


|                 |                   |                          |                   |
|-----------------|-------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) | Channel                  | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz    | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung       |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5446.87         | 44.29 PK                | 74             | -29.71      | -59.34                  | 8.37                   | -50.97           |
| 2                            | 5446.87         | 36.7 AV                 | 54             | -17.3       | -66.93                  | 8.37                   | -58.56           |
| 3                            | 7254.66         | 44.28 PK                | 74             | -29.72      | -59.35                  | 8.37                   | -50.98           |
| 4                            | 7254.66         | 37.09 AV                | 54             | -16.91      | -66.54                  | 8.37                   | -58.17           |
| 5                            | 20504.7         | 44.04 PK                | 74             | -29.96      | -59.59                  | 8.37                   | -51.22           |
| 6                            | 20504.7         | 34.73 AV                | 54             | -19.27      | -68.9                   | 8.37                   | -60.53           |
| 7                            | 23955.8         | 47.81 PK                | 74             | -26.19      | -55.82                  | 8.37                   | -47.45           |
| 8                            | 23955.8         | 36.22 AV                | 54             | -17.78      | -67.41                  | 8.37                   | -59.04           |
| 9                            | 39674.4         | 39.44 PK                | 74             | -34.56      | -64.19                  | 8.37                   | -55.82           |
| 10                           | 39674.4         | 30.58 AV                | 54             | -23.42      | -73.05                  | 8.37                   | -64.68           |

Note: Margin value = Emission Level - Limit value

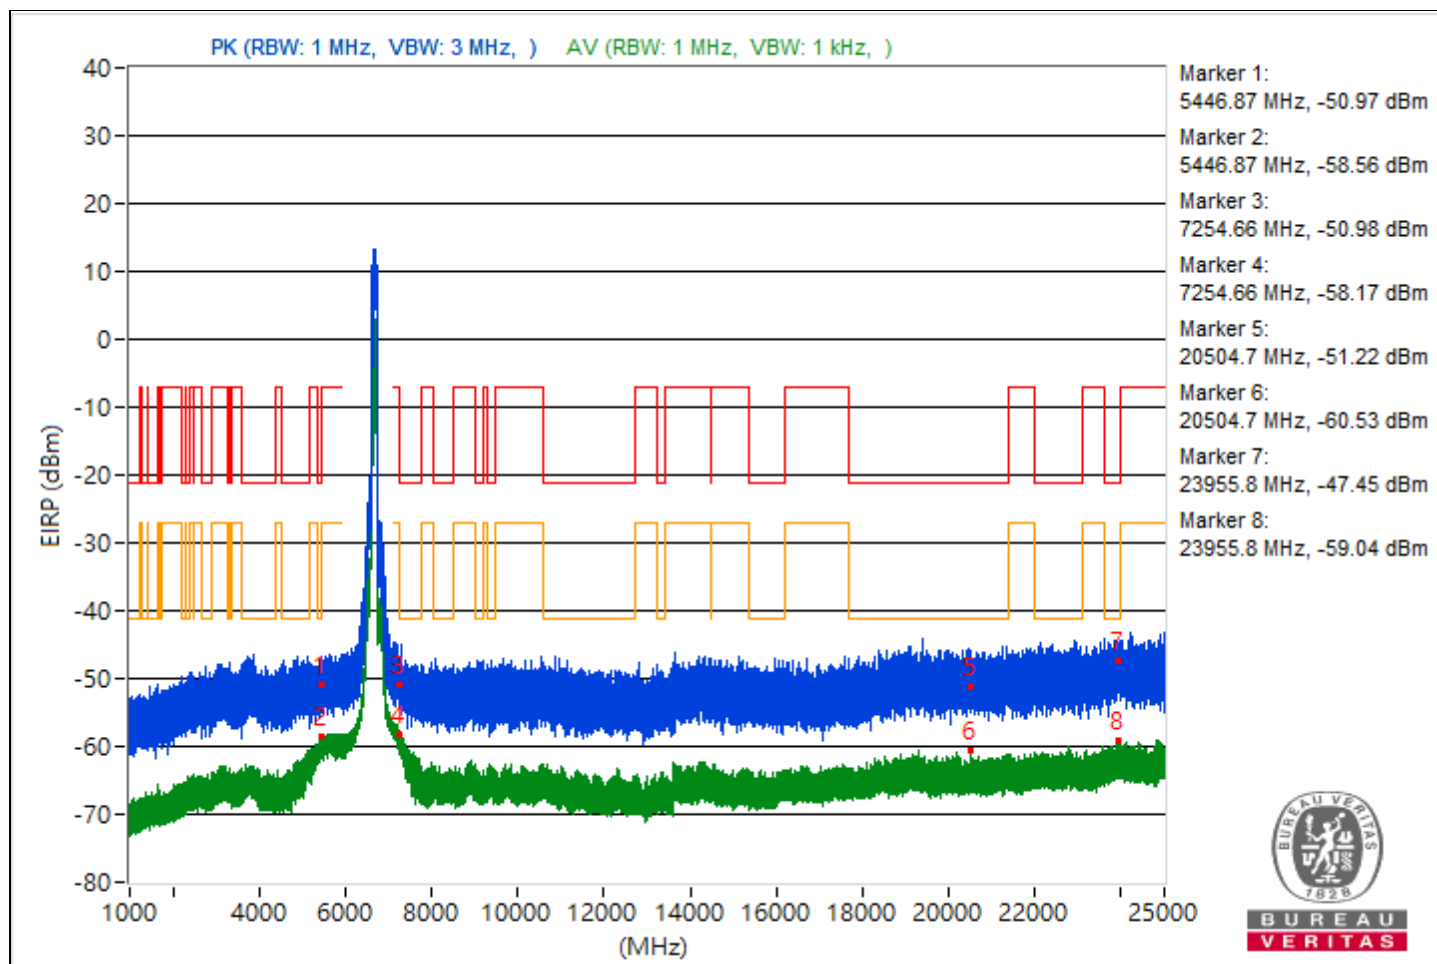

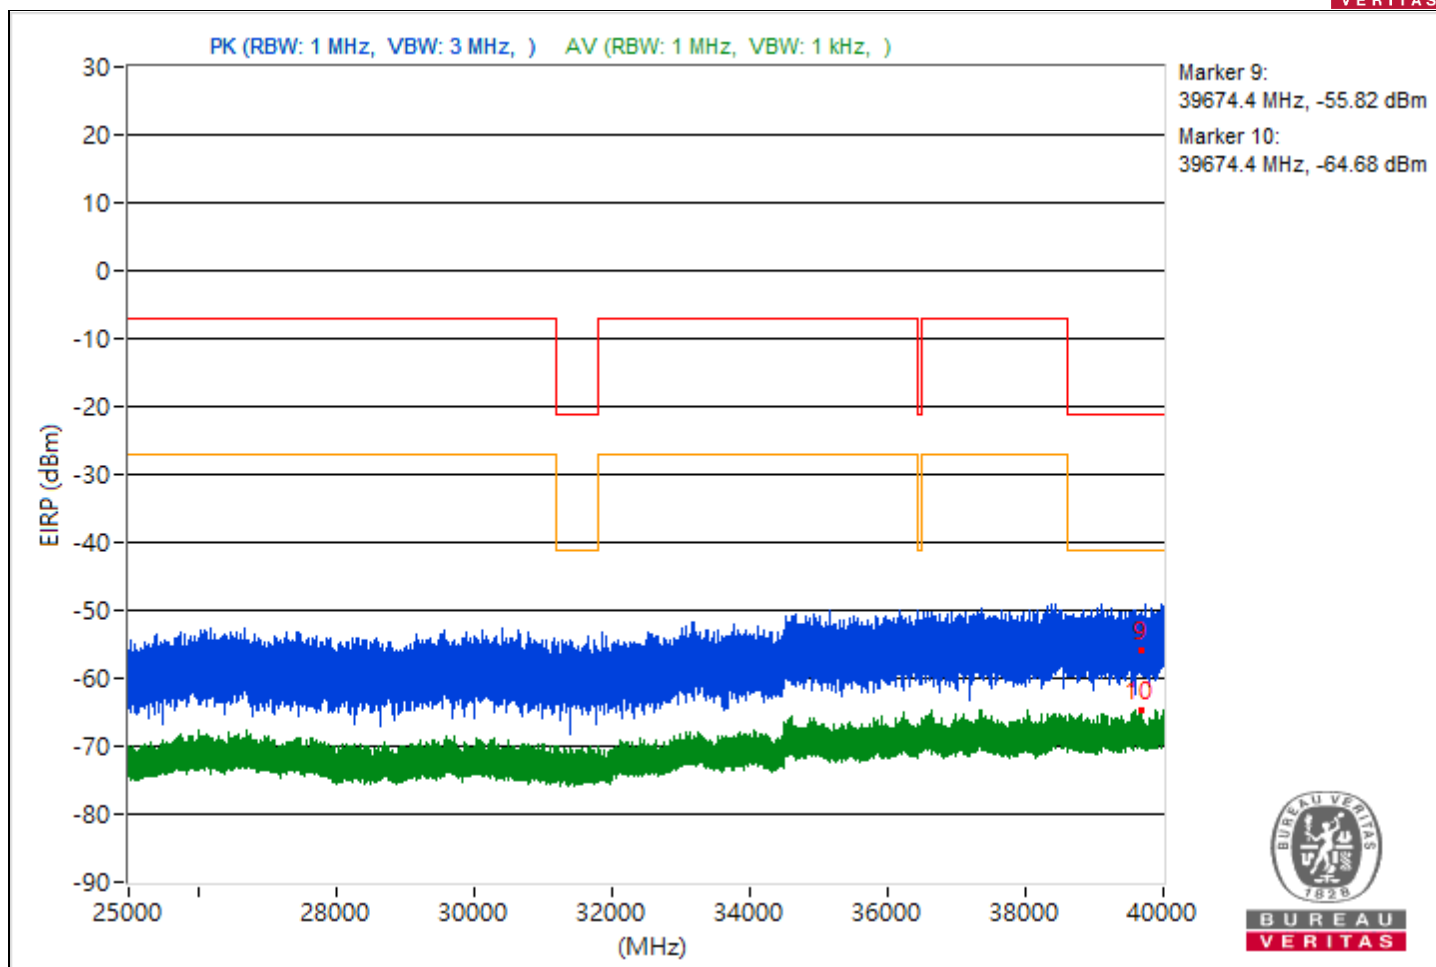



|                 |                             |                          |                 |
|-----------------|-----------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                 |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5458.53         | 49.79 PK                | 74             | -24.21      | -53.84                  | 8.37                   | -45.47           |
| 2                            | 5458.53         | 40.19 AV                | 54             | -13.81      | -63.44                  | 8.37                   | -55.07           |
| 3                            | #7940.03        | 55.16 PK                | 88.26          | -33.1       | -48.47                  | 8.37                   | -40.1            |
| 4                            | #7940.03        | 52.8 AV                 | 68.26          | -15.46      | -50.83                  | 8.37                   | -42.46           |
| 5                            | 19086.8         | 47.18 PK                | 74             | -26.82      | -56.45                  | 8.37                   | -48.08           |
| 6                            | 19086.8         | 34.94 AV                | 54             | -19.06      | -68.69                  | 8.37                   | -60.32           |
| 7                            | 23924.6         | 47.16 PK                | 74             | -26.84      | -56.47                  | 8.37                   | -48.1            |
| 8                            | 23924.6         | 36.36 AV                | 54             | -17.64      | -67.27                  | 8.37                   | -58.9            |
| 9                            | 39656.71        | 40.89 PK                | 74             | -33.11      | -62.74                  | 8.37                   | -54.37           |
| 10                           | 39656.71        | 31.34 AV                | 54             | -22.66      | -72.29                  | 8.37                   | -63.92           |

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

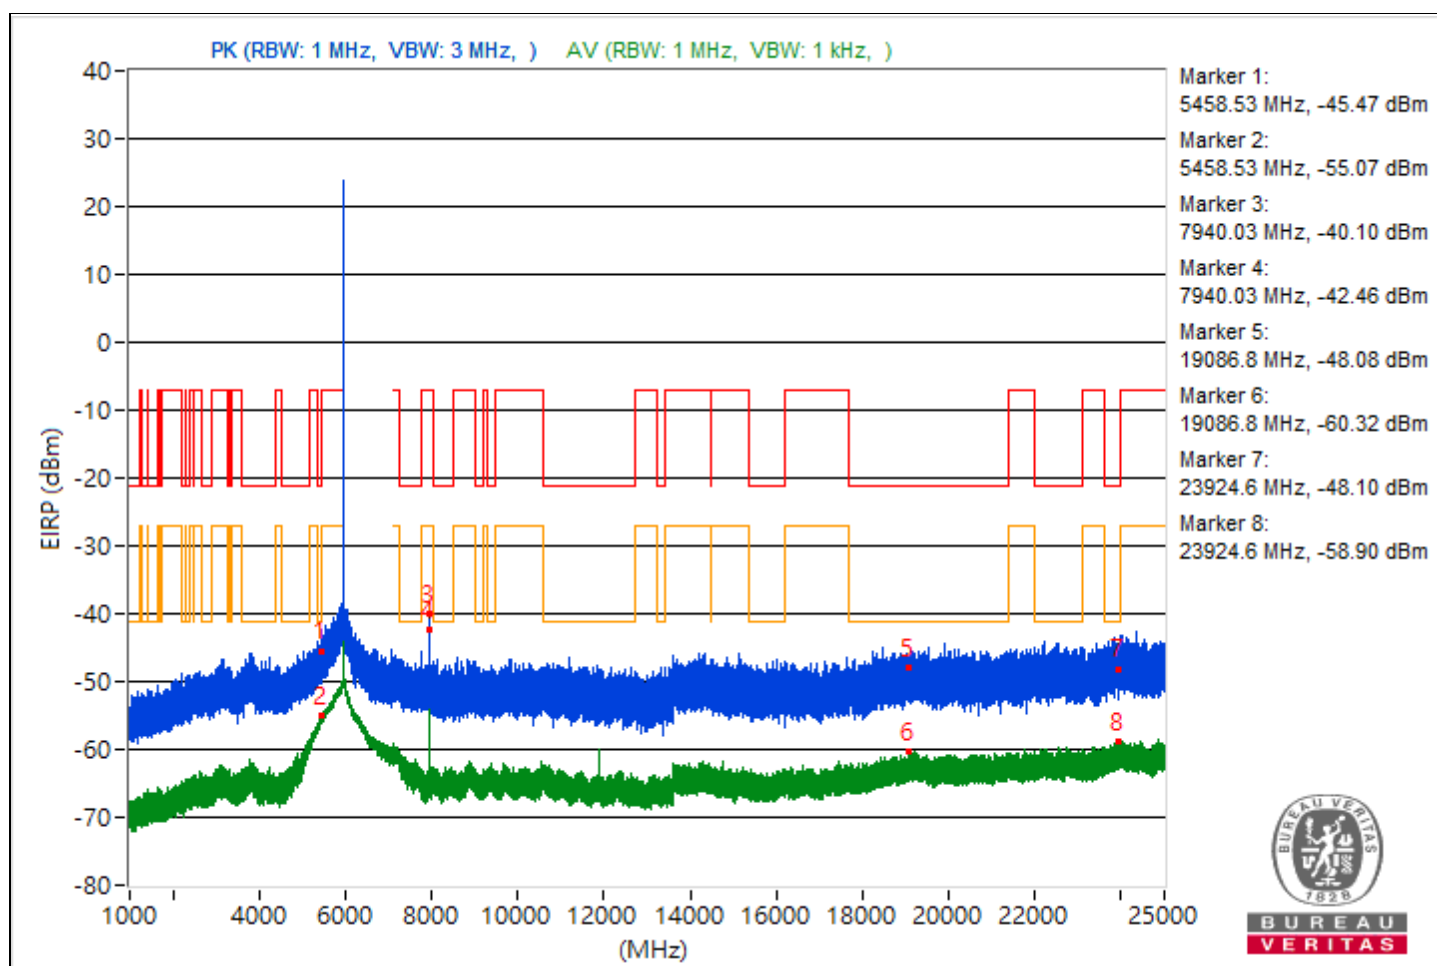


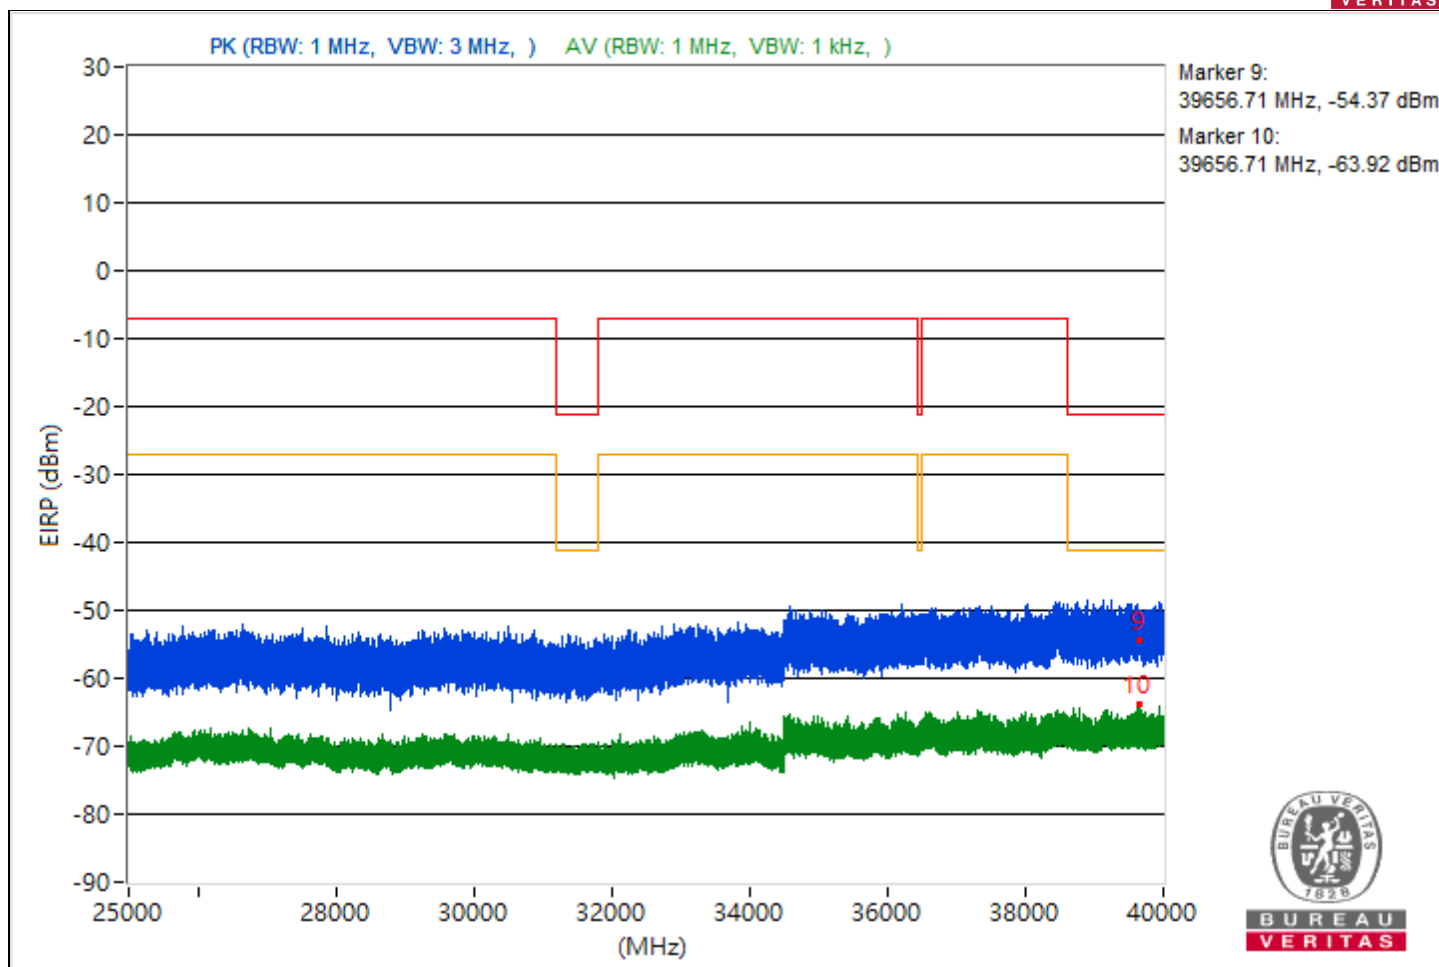

|                 |                             |                          |                  |
|-----------------|-----------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                 |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459.16         | 47.95 PK                | 74             | -26.05      | -55.68                  | 8.37                   | -47.31           |
| 2                            | 5459.16         | 38.07 AV                | 54             | -15.93      | -65.56                  | 8.37                   | -57.19           |
| 3                            | 7311.28         | 45.5 PK                 | 74             | -28.5       | -58.13                  | 8.37                   | -49.76           |
| 4                            | 7311.28         | 36.87 AV                | 54             | -17.13      | -66.76                  | 8.37                   | -58.39           |
| 5                            | 21068.1         | 48.03 PK                | 74             | -25.97      | -55.6                   | 8.37                   | -47.23           |
| 6                            | 21068.1         | 34.79 AV                | 54             | -19.21      | -68.84                  | 8.37                   | -60.47           |
| 7                            | 23956.5         | 49.72 PK                | 74             | -24.28      | -53.91                  | 8.37                   | -45.54           |
| 8                            | 23956.5         | 36.36 AV                | 54             | -17.64      | -67.27                  | 8.37                   | -58.9            |
| 9                            | 39540.27        | 44.26 PK                | 74             | -29.74      | -59.37                  | 8.37                   | -51              |
| 10                           | 39540.27        | 31.06 AV                | 54             | -22.94      | -72.57                  | 8.37                   | -64.2            |

Note: Margin value = Emission Level - Limit value

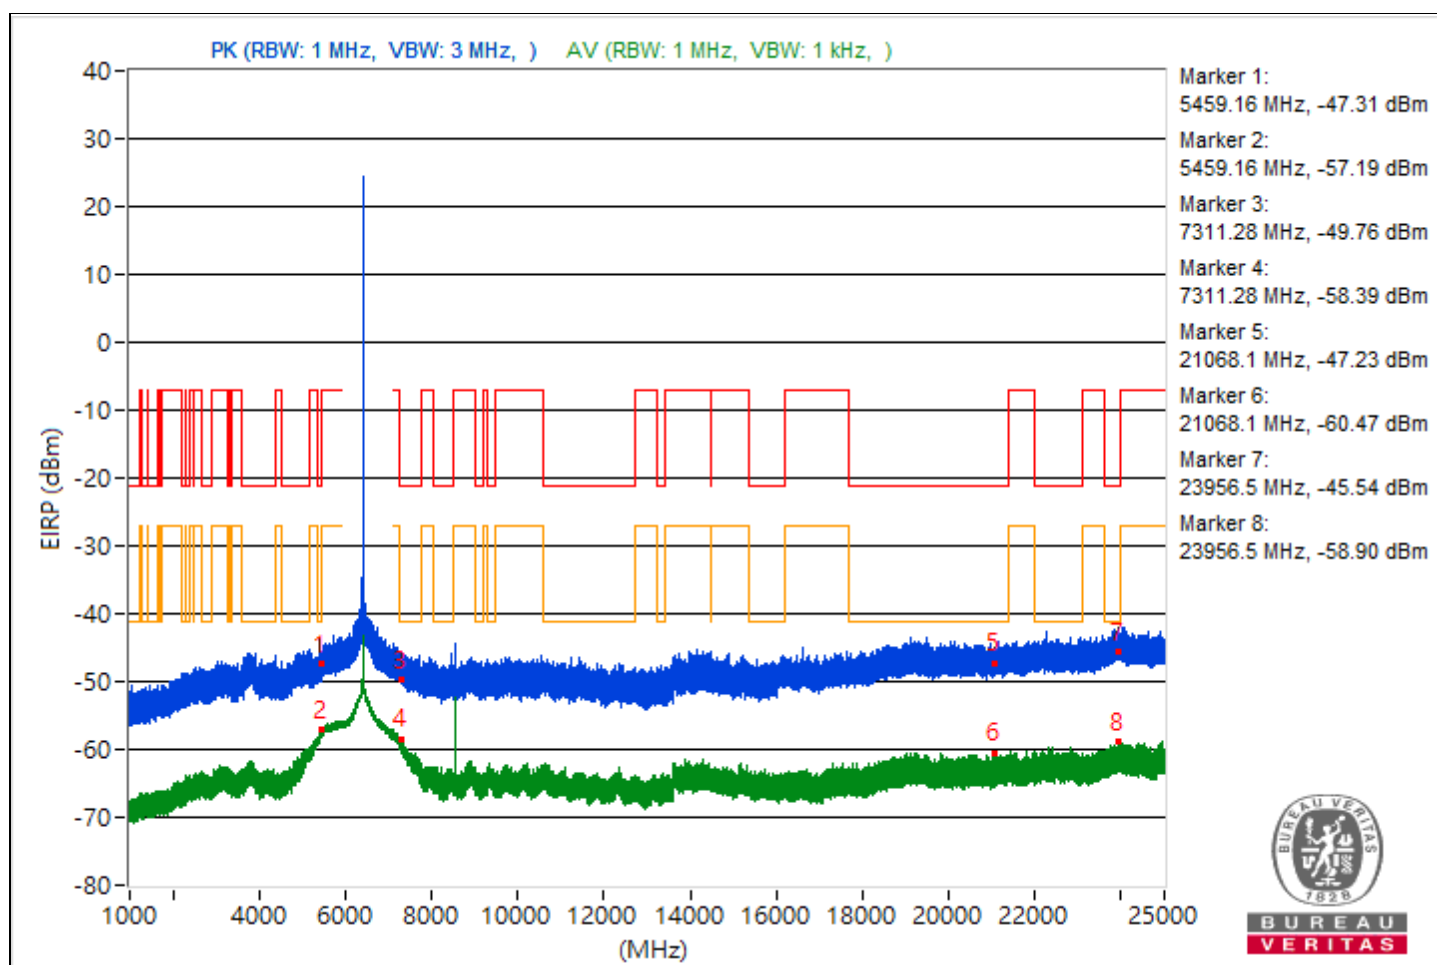





|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5452.16         | 48.44 PK                | 74             | -25.56      | -55.19                  | 8.37                   | -46.82           |
| 2                            | 5452.16         | 36.79 AV                | 54             | -17.21      | -66.84                  | 8.37                   | -58.47           |
| 3                            | 7256.44         | 47.52 PK                | 74             | -26.48      | -56.11                  | 8.37                   | -47.74           |
| 4                            | 7256.44         | 36.62 AV                | 54             | -17.38      | -67.01                  | 8.37                   | -58.64           |
| 5                            | 20173           | 46.23 PK                | 74             | -27.77      | -57.4                   | 8.37                   | -49.03           |
| 6                            | 20173           | 34.91 AV                | 54             | -19.09      | -68.72                  | 8.37                   | -60.35           |
| 7                            | 23998           | 49.07 PK                | 74             | -24.93      | -54.56                  | 8.37                   | -46.19           |
| 8                            | 23998           | 36.58 AV                | 54             | -17.42      | -67.05                  | 8.37                   | -58.68           |
| 9                            | 39994.76        | 41.12 PK                | 74             | -32.88      | -62.51                  | 8.37                   | -54.14           |
| 10                           | 39994.76        | 31.38 AV                | 54             | -22.62      | -72.25                  | 8.37                   | -63.88           |

Note: Margin value = Emission Level - Limit value

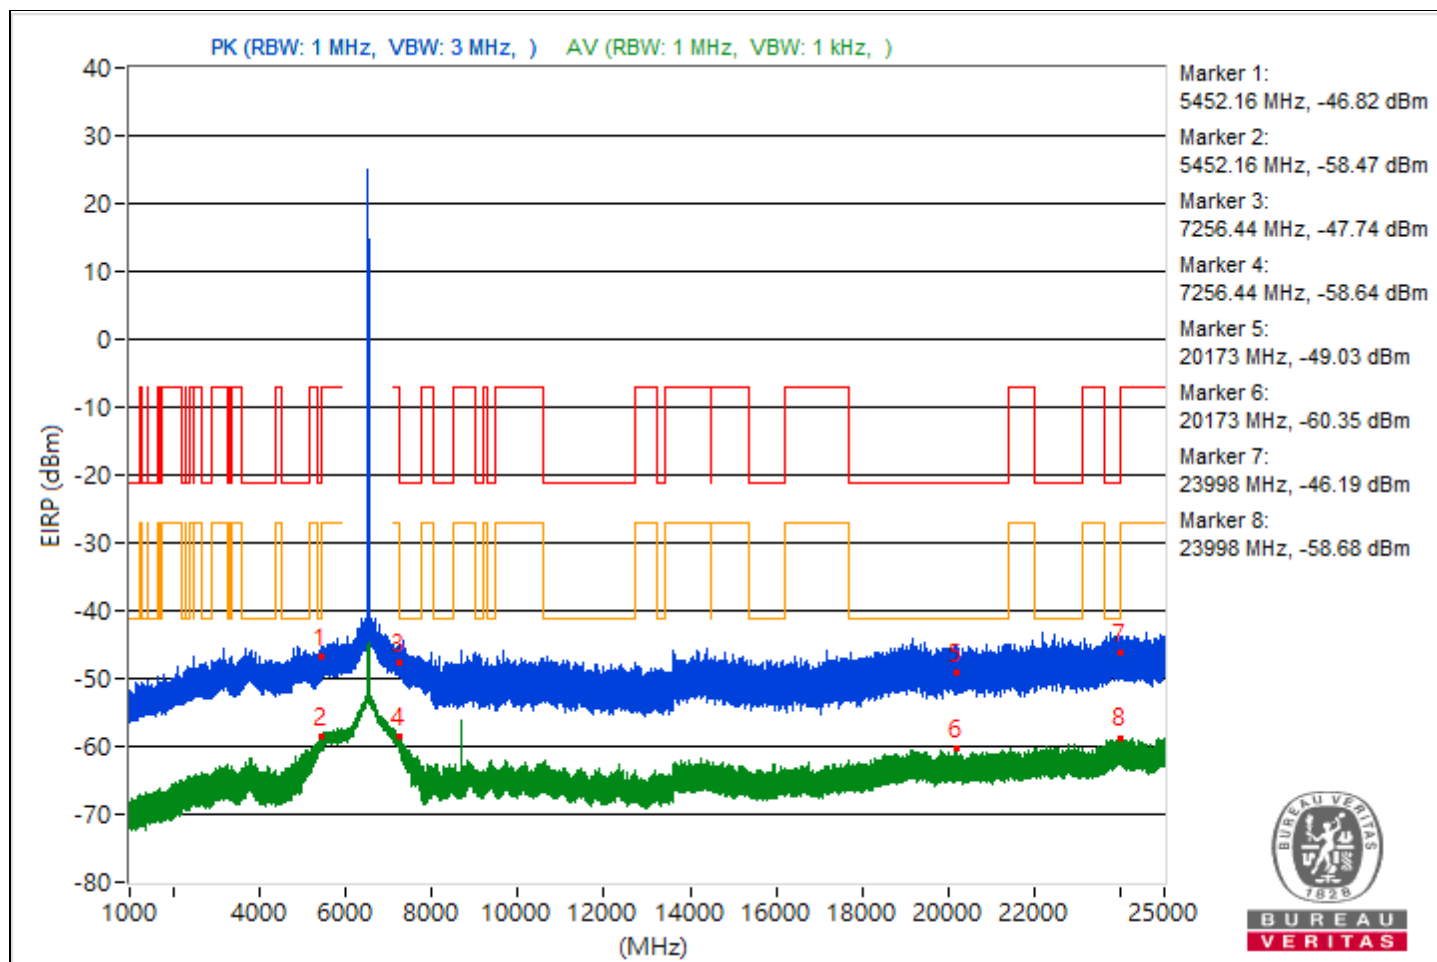


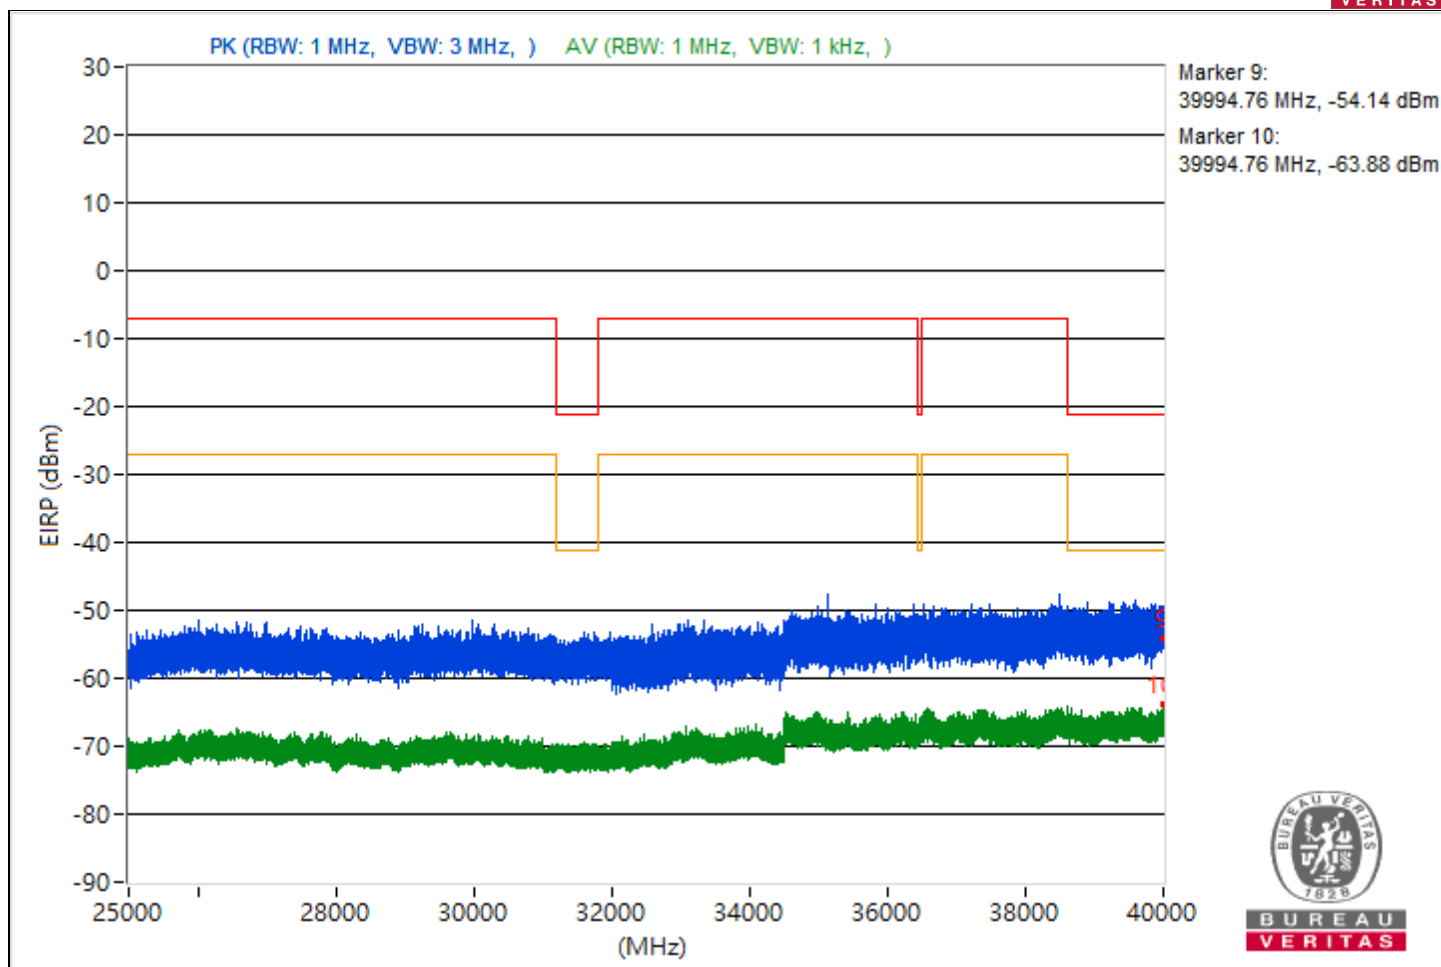


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5449.36         | 45.48 PK                | 74             | -28.52      | -58.15                  | 8.37                   | -49.78           |
| 2                            | 5449.36         | 35.93 AV                | 54             | -18.07      | -67.7                   | 8.37                   | -59.33           |
| 3                            | 7259.63         | 48.97 PK                | 74             | -25.03      | -54.66                  | 8.37                   | -46.29           |
| 4                            | 7259.63         | 39.4 AV                 | 54             | -14.6       | -64.23                  | 8.37                   | -55.86           |
| 5                            | 21370.9         | 47.06 PK                | 74             | -26.94      | -56.57                  | 8.37                   | -48.2            |
| 6                            | 21370.9         | 34.99 AV                | 54             | -19.01      | -68.64                  | 8.37                   | -60.27           |
| 7                            | 23776.6         | 49.73 PK                | 74             | -24.27      | -53.9                   | 8.37                   | -45.53           |
| 8                            | 23776.6         | 36.49 AV                | 54             | -17.51      | -67.14                  | 8.37                   | -58.77           |
| 9                            | 39984.36        | 42.15 PK                | 74             | -31.85      | -61.48                  | 8.37                   | -53.11           |
| 10                           | 39984.36        | 31.23 AV                | 54             | -22.77      | -72.4                   | 8.37                   | -64.03           |

Note: Margin value = Emission Level - Limit value

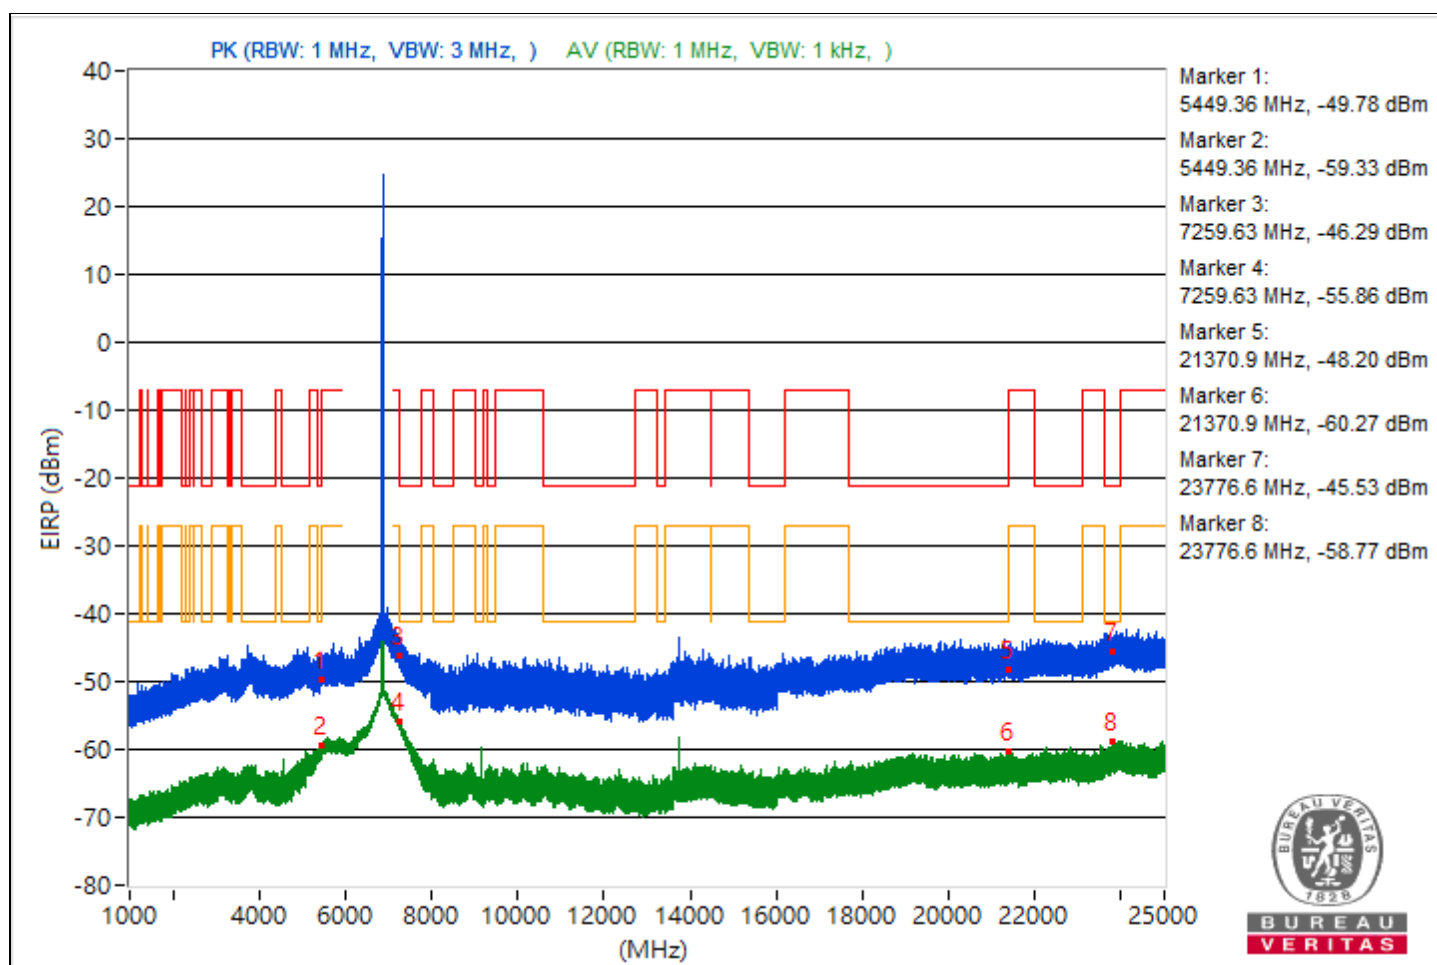

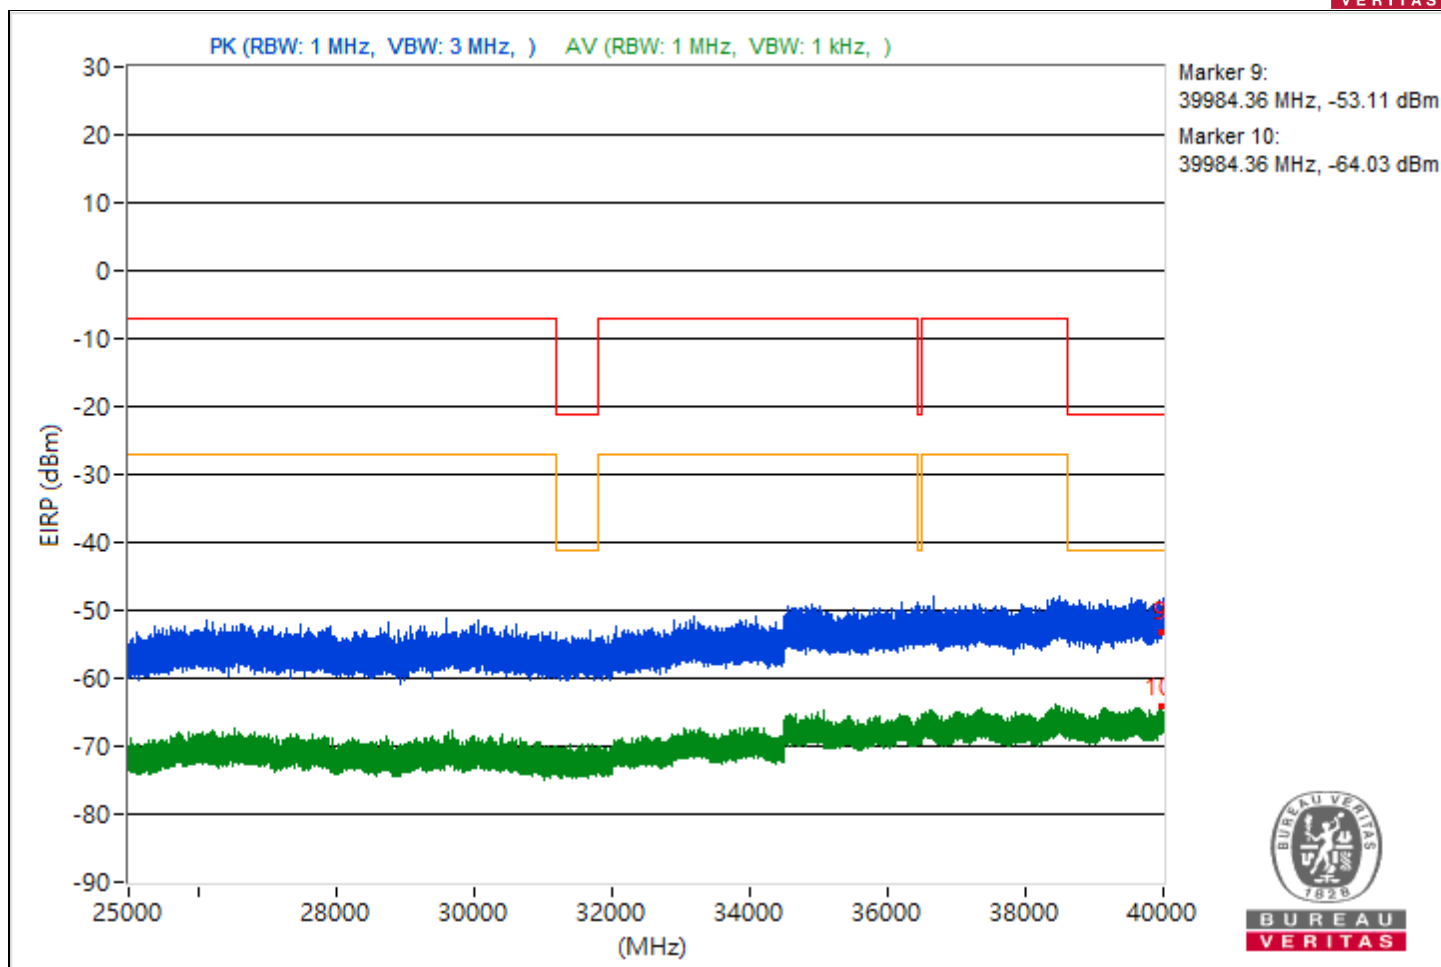



|                 |                             |                          |                 |
|-----------------|-----------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                 |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5441.11         | 46.36 PK                | 74             | -27.64      | -57.27                  | 8.37                   | -48.9            |
| 2                            | 5441.11         | 39.77 AV                | 54             | -14.23      | -63.86                  | 8.37                   | -55.49           |
| 3                            | #7940.03        | 53.85 PK                | 88.26          | -34.41      | -49.78                  | 8.37                   | -41.41           |
| 4                            | #7940.03        | 52.63 AV                | 68.26          | -15.63      | -51                     | 8.37                   | -42.63           |
| 5                            | 21330.2         | 42.79 PK                | 74             | -31.21      | -60.84                  | 8.37                   | -52.47           |
| 6                            | 21330.2         | 34.17 AV                | 54             | -19.83      | -69.46                  | 8.37                   | -61.09           |
| 7                            | 23912.1         | 46.52 PK                | 74             | -27.48      | -57.11                  | 8.37                   | -48.74           |
| 8                            | 23912.1         | 35.97 AV                | 54             | -18.03      | -67.66                  | 8.37                   | -59.29           |
| 9                            | 39807.29        | 36.97 PK                | 74             | -37.03      | -66.66                  | 8.37                   | -58.29           |
| 10                           | 39807.29        | 30.41 AV                | 54             | -23.59      | -73.22                  | 8.37                   | -64.85           |

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

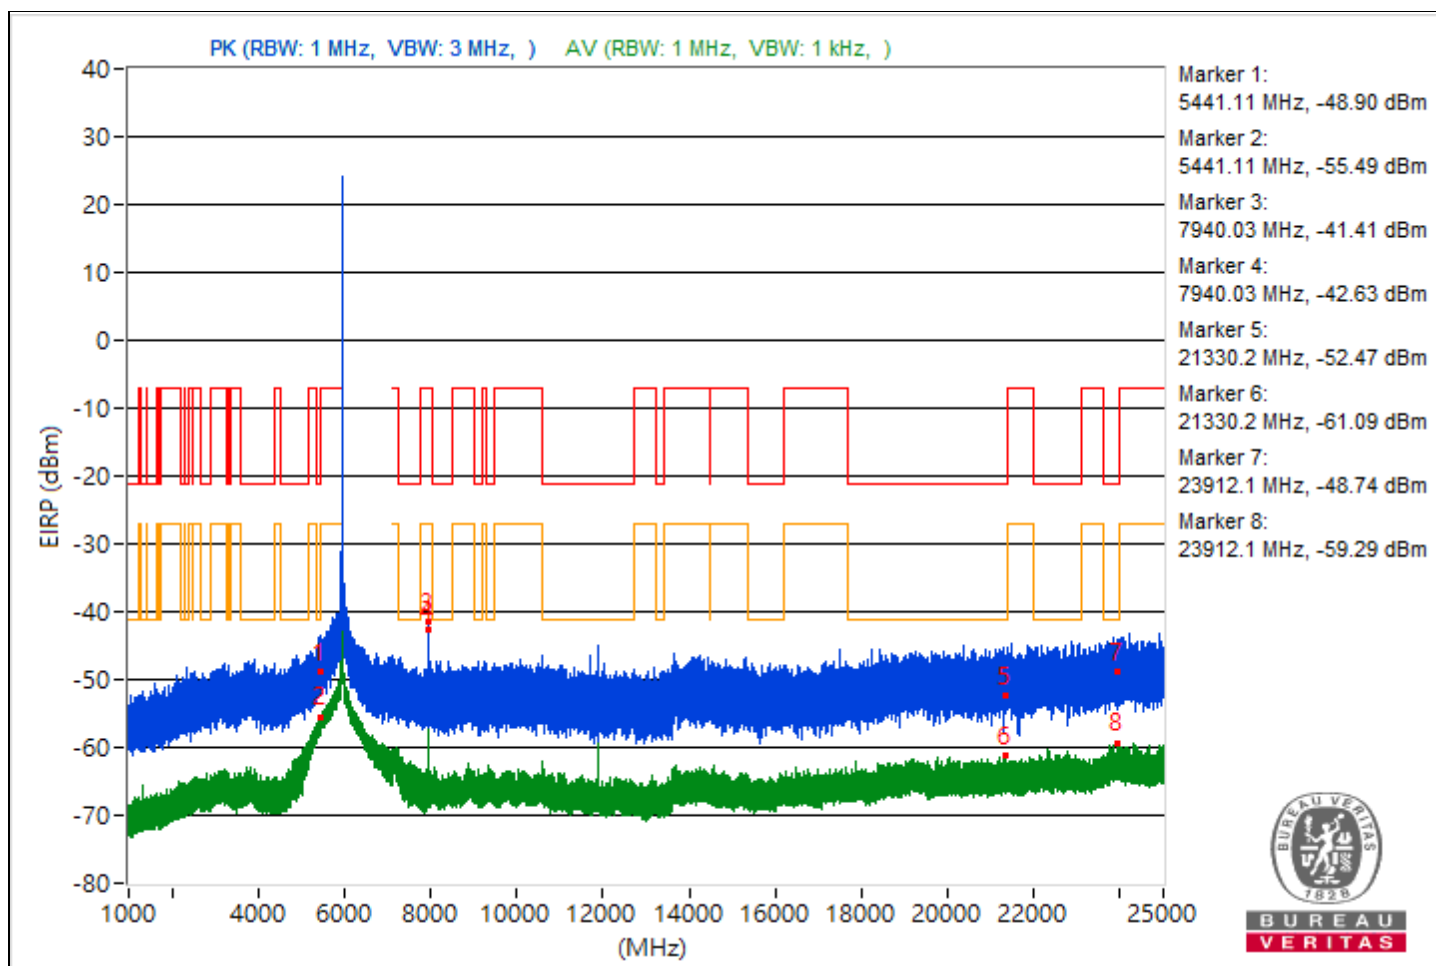


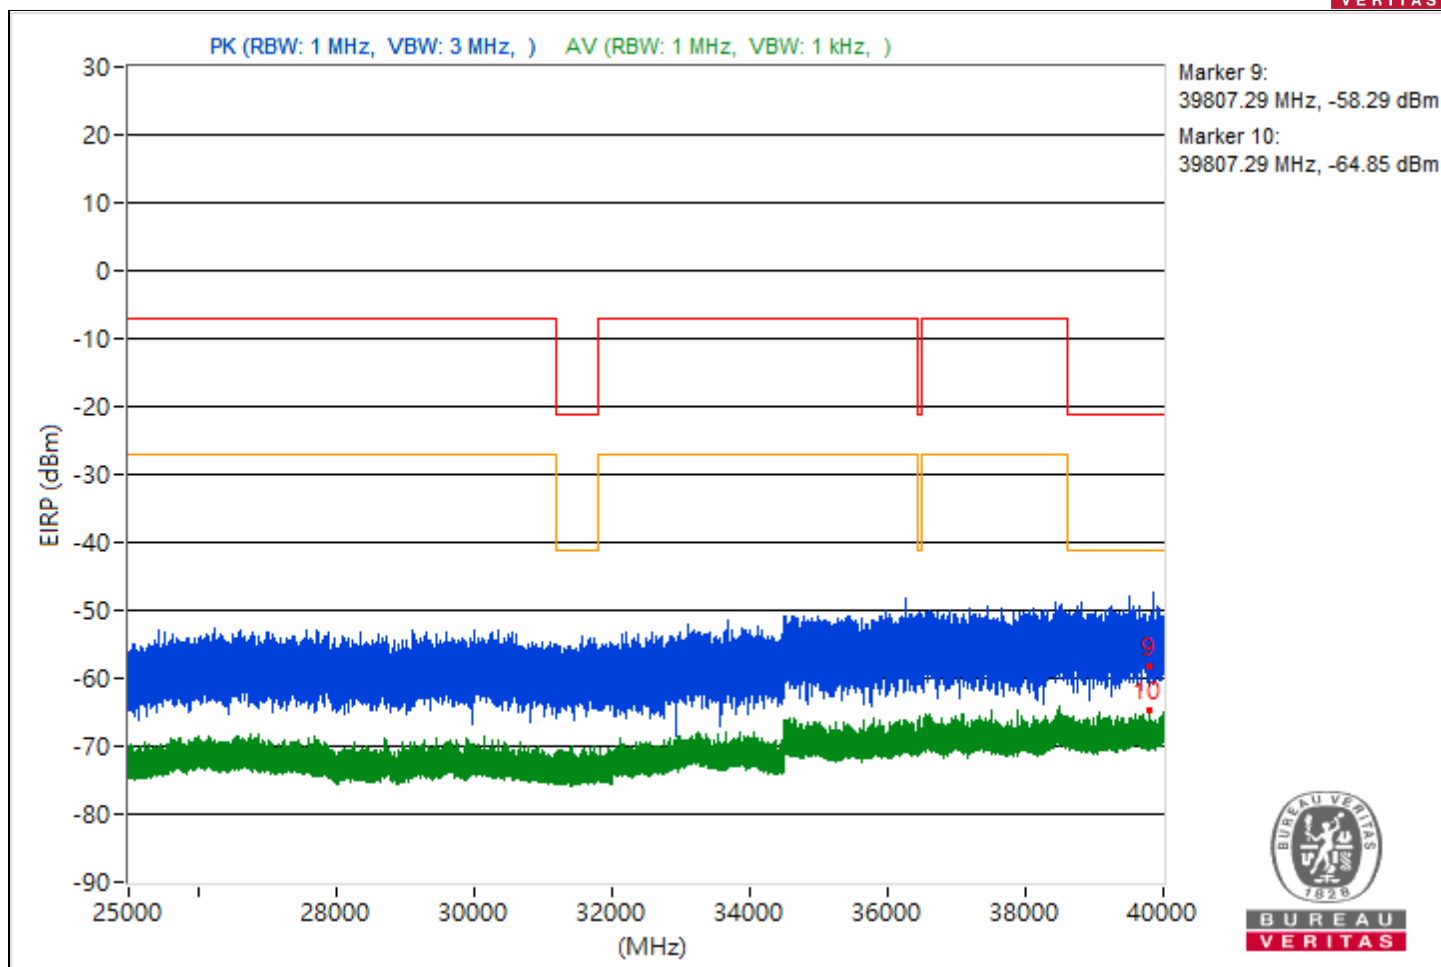

|                 |                             |                          |                  |
|-----------------|-----------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                 |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459.7          | 47.49 PK                | 74             | -26.51      | -56.14                  | 8.37                   | -47.77           |
| 2                            | 5459.7          | 37.94 AV                | 54             | -16.06      | -65.69                  | 8.37                   | -57.32           |
| 3                            | 7251.54         | 45.67 PK                | 74             | -28.33      | -57.96                  | 8.37                   | -49.59           |
| 4                            | 7251.54         | 36.72 AV                | 54             | -17.28      | -66.91                  | 8.37                   | -58.54           |
| 5                            | 20177.3         | 44.26 PK                | 74             | -29.74      | -59.37                  | 8.37                   | -51.00           |
| 6                            | 20177.3         | 34.6 AV                 | 54             | -19.4       | -69.03                  | 8.37                   | -60.66           |
| 7                            | 23948.9         | 47.49 PK                | 74             | -26.51      | -56.14                  | 8.37                   | -47.77           |
| 8                            | 23948.9         | 35.88 AV                | 54             | -18.12      | -67.75                  | 8.37                   | -59.38           |
| 9                            | 39650.76        | 43.82 PK                | 74             | -30.18      | -59.81                  | 8.37                   | -51.44           |
| 10                           | 39650.76        | 30.76 AV                | 54             | -23.24      | -72.87                  | 8.37                   | -64.5            |

Note: Margin value = Emission Level - Limit value

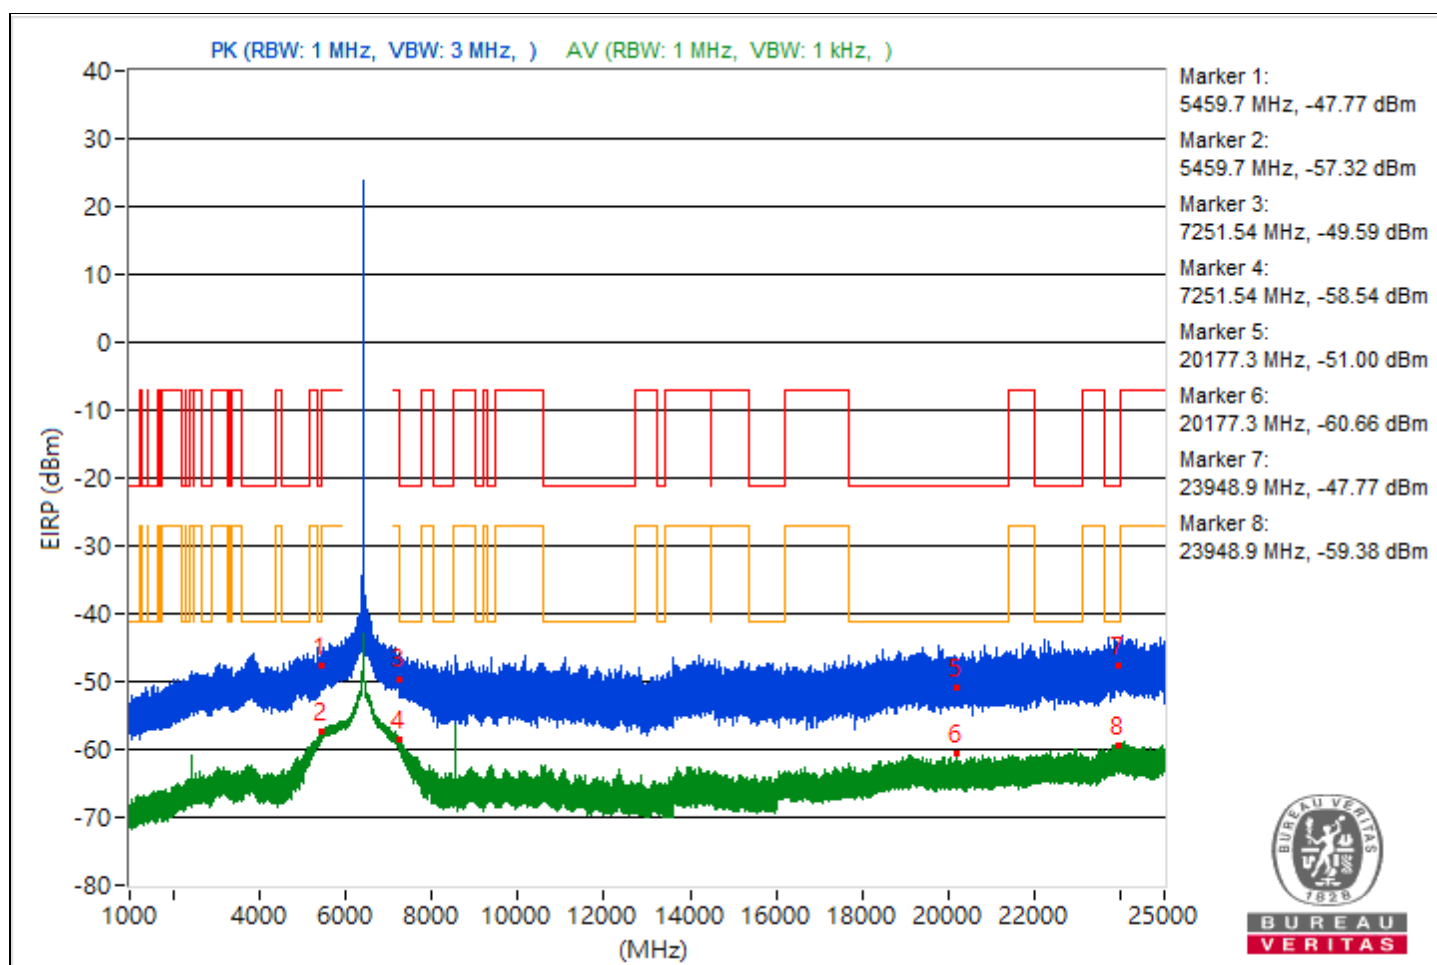





|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5427.66         | 47.32 PK                | 74             | -26.68      | -56.31                  | 8.37                   | -47.94           |
| 2                            | 5427.66         | 36.84 AV                | 54             | -17.16      | -66.79                  | 8.37                   | -58.42           |
| 3                            | 7253.33         | 49.33 PK                | 74             | -24.67      | -54.3                   | 8.37                   | -45.93           |
| 4                            | 7253.33         | 36.65 AV                | 54             | -17.35      | -66.98                  | 8.37                   | -58.61           |
| 5                            | 19193.2         | 48.05 PK                | 74             | -25.95      | -55.58                  | 8.37                   | -47.21           |
| 6                            | 19193.2         | 35.66 AV                | 54             | -18.34      | -67.97                  | 8.37                   | -59.6            |
| 7                            | 23930.3         | 46.38 PK                | 74             | -27.62      | -57.25                  | 8.37                   | -48.88           |
| 8                            | 23930.3         | 36.75 AV                | 54             | -17.25      | -66.88                  | 8.37                   | -58.51           |
| 9                            | 39969.42        | 42.24 PK                | 74             | -31.76      | -61.39                  | 8.37                   | -53.02           |
| 10                           | 39969.42        | 32.02 AV                | 54             | -21.98      | -71.61                  | 8.37                   | -63.24           |

Note: Margin value = Emission Level - Limit value

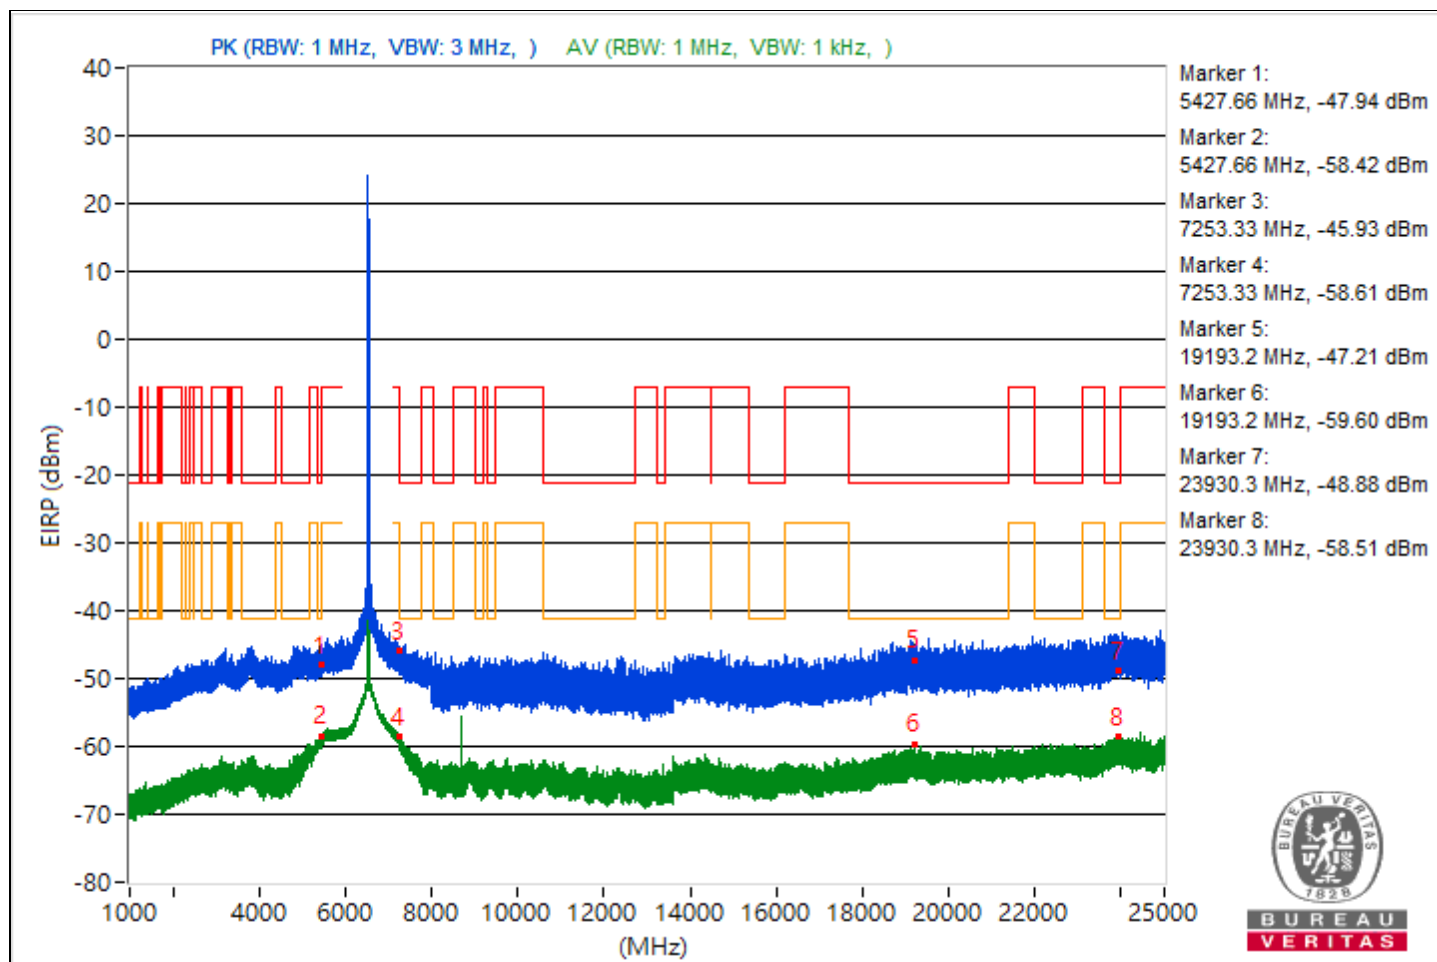


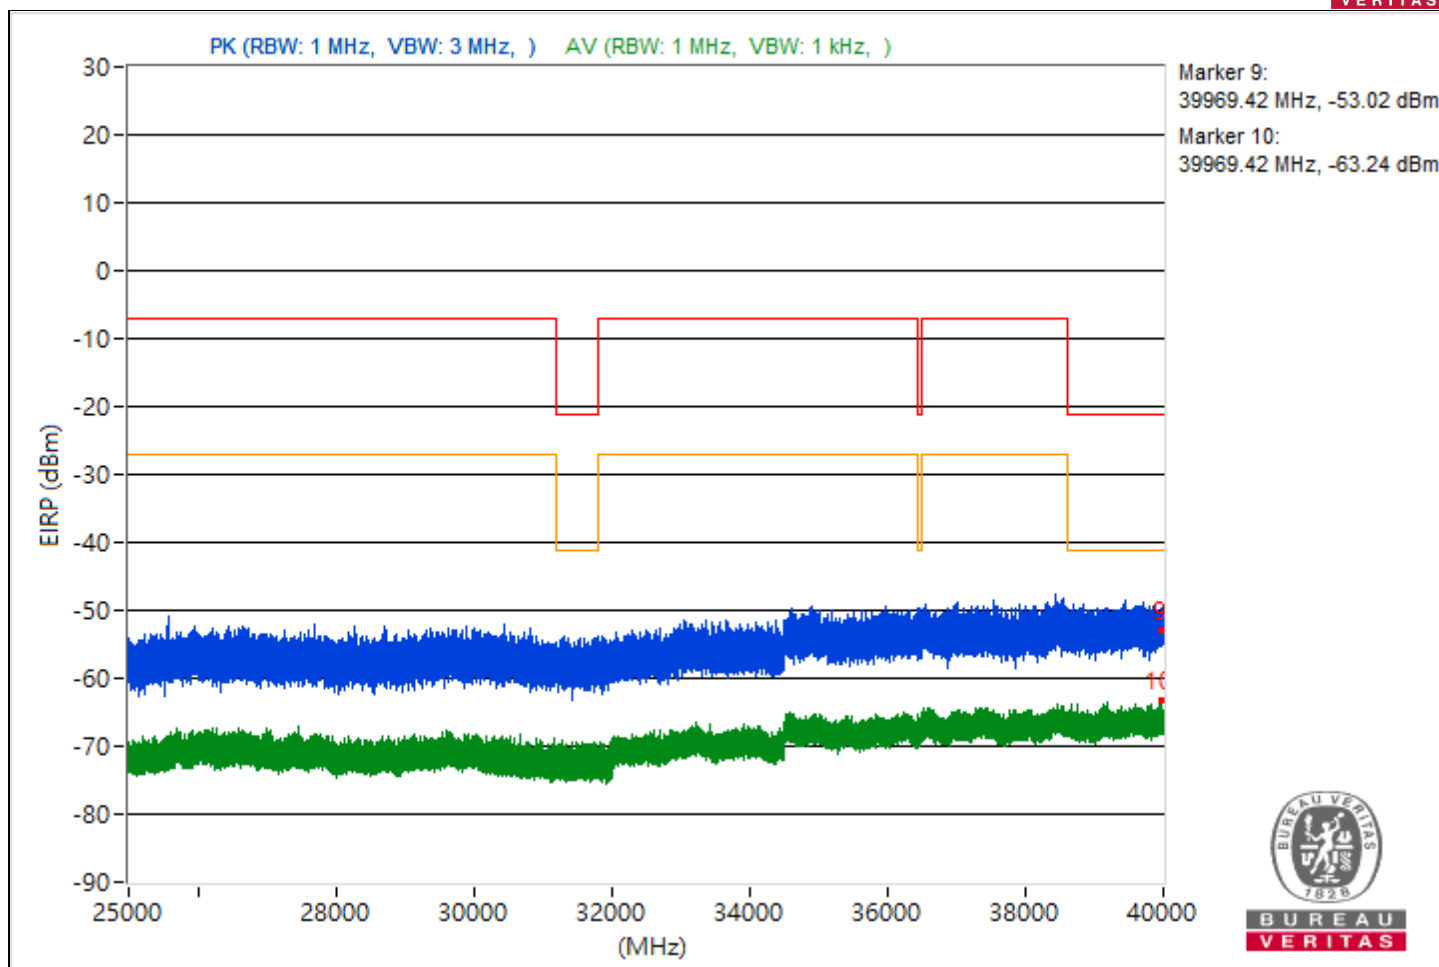


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz              | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5453.71         | 43.35 PK                | 74             | -30.65      | -60.28                  | 8.37                   | -51.91           |
| 2                            | 5453.71         | 35.59 AV                | 54             | -18.41      | -68.04                  | 8.37                   | -59.67           |
| 3                            | 7250.22         | 44.98 PK                | 74             | -29.02      | -58.65                  | 8.37                   | -50.28           |
| 4                            | 7250.22         | 39.25 AV                | 54             | -14.75      | -64.38                  | 8.37                   | -56.01           |
| 5                            | 21102.4         | 42.67 PK                | 74             | -31.33      | -60.96                  | 8.37                   | -52.59           |
| 6                            | 21102.4         | 34.08 AV                | 54             | -19.92      | -69.55                  | 8.37                   | -61.18           |
| 7                            | 23899.4         | 46.02 PK                | 74             | -27.98      | -57.61                  | 8.37                   | -49.24           |
| 8                            | 23899.4         | 35.63 AV                | 54             | -18.37      | -68                     | 8.37                   | -59.63           |
| 9                            | 39383.56        | 41.12 PK                | 74             | -32.88      | -62.51                  | 8.37                   | -54.14           |
| 10                           | 39383.56        | 30.74 AV                | 54             | -23.26      | -72.89                  | 8.37                   | -64.52           |

Note: Margin value = Emission Level - Limit value

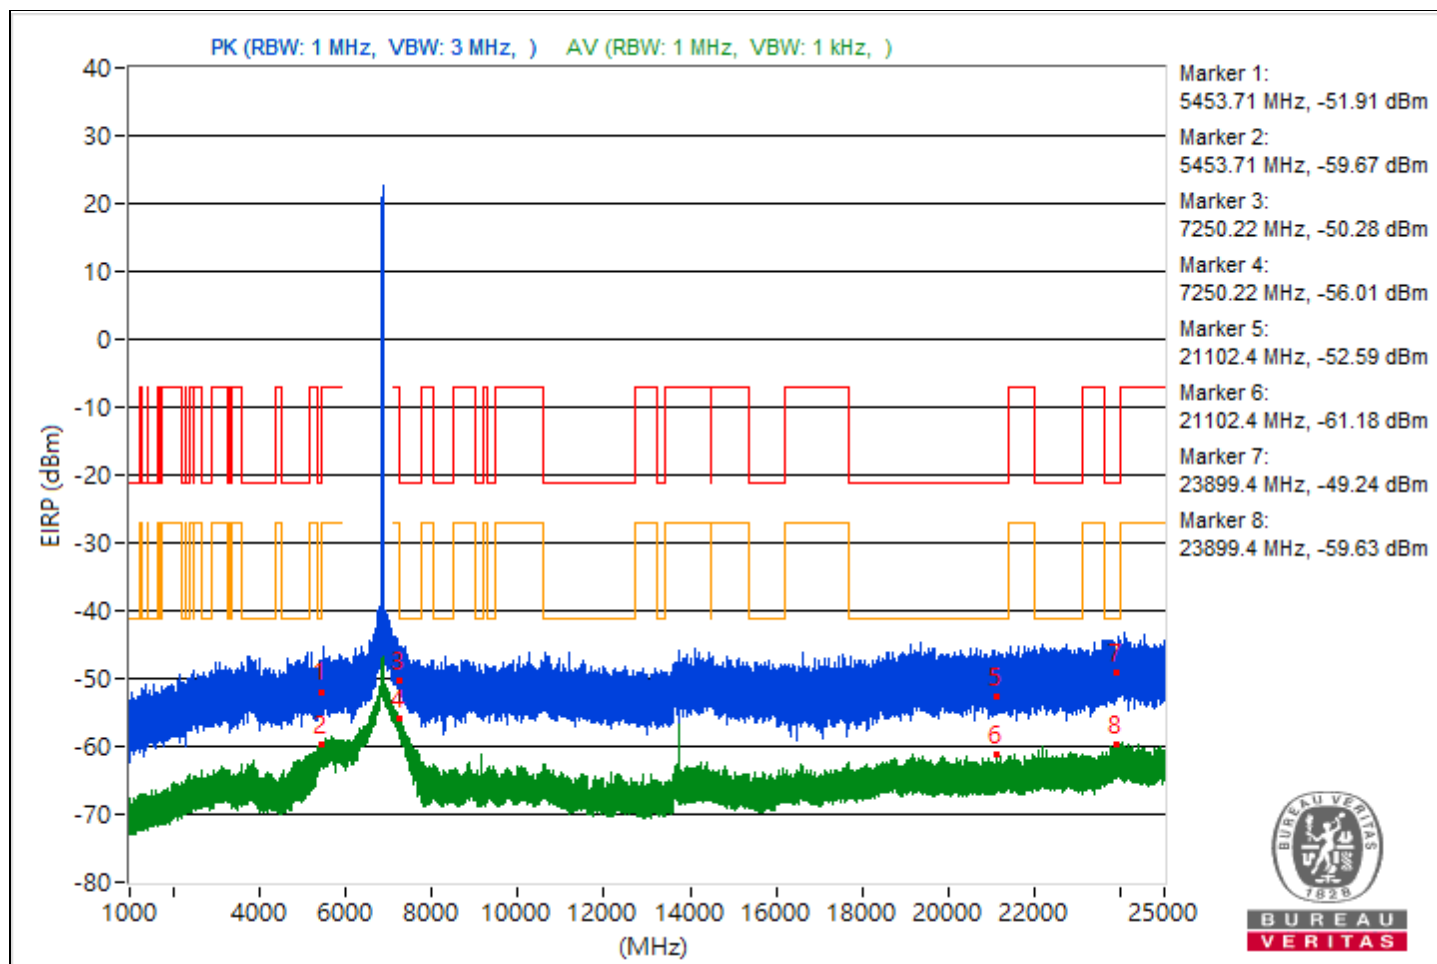


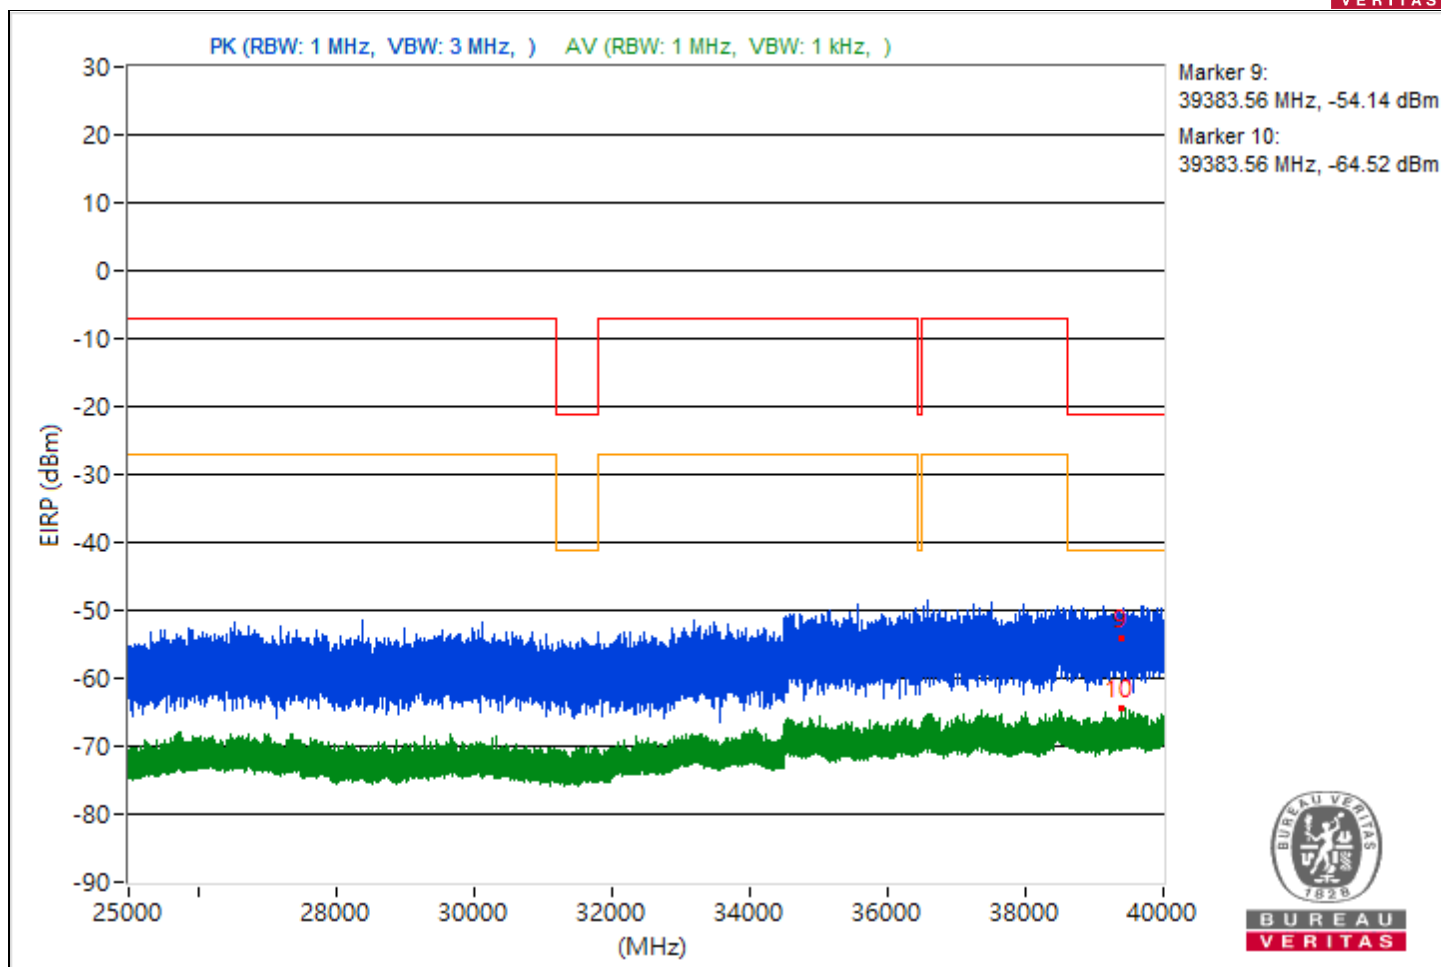


|                 |                              |                          |                 |
|-----------------|------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                  |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5458.3          | 44.55 PK                | 74             | -29.45      | -59.08                  | 8.37                   | -50.71           |
| 2                            | 5458.3          | 39.84 AV                | 54             | -14.16      | -63.79                  | 8.37                   | -55.42           |
| 3                            | 11898.67        | 48.42 PK                | 74             | -25.58      | -55.21                  | 8.37                   | -46.84           |
| 4                            | 11898.67        | 40.96 AV                | 54             | -13.04      | -62.67                  | 8.37                   | -54.3            |
| 5                            | 21392.6         | 45.86 PK                | 74             | -28.14      | -57.77                  | 8.37                   | -49.4            |
| 6                            | 21392.6         | 34.19 AV                | 54             | -19.81      | -69.44                  | 8.37                   | -61.07           |
| 7                            | 23980.6         | 48.96 PK                | 74             | -25.04      | -54.67                  | 8.37                   | -46.3            |
| 8                            | 23980.6         | 35.64 AV                | 54             | -18.36      | -67.99                  | 8.37                   | -59.62           |
| 9                            | 39677.6         | 38.16 PK                | 74             | -35.84      | -65.47                  | 8.37                   | -57.1            |
| 10                           | 39677.6         | 30.87 AV                | 54             | -23.13      | -72.76                  | 8.37                   | -64.39           |

Note: Margin value = Emission Level - Limit value

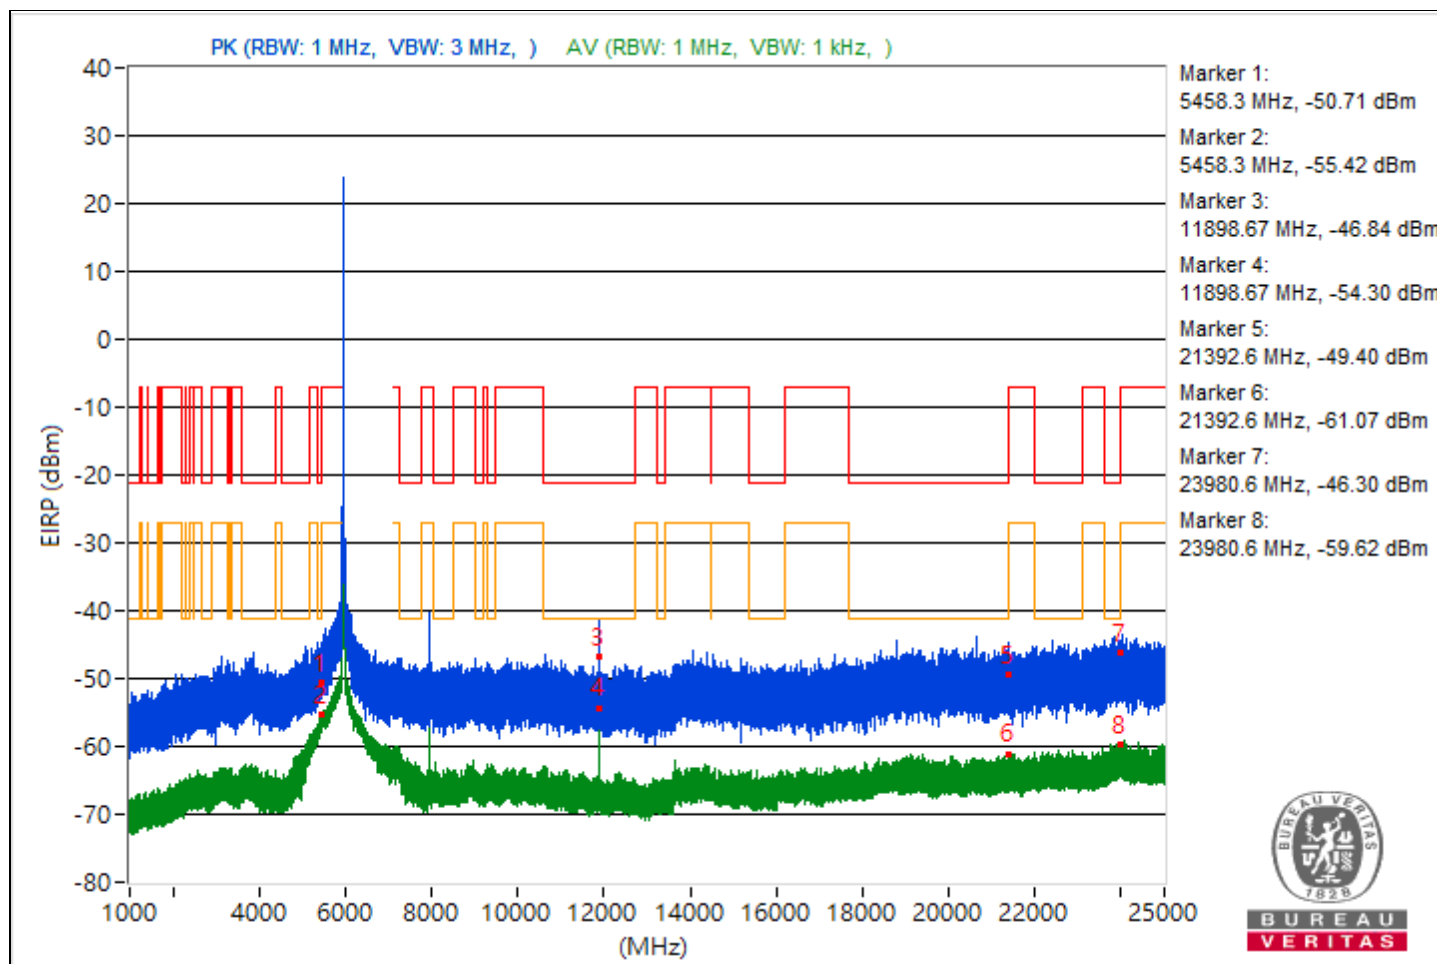


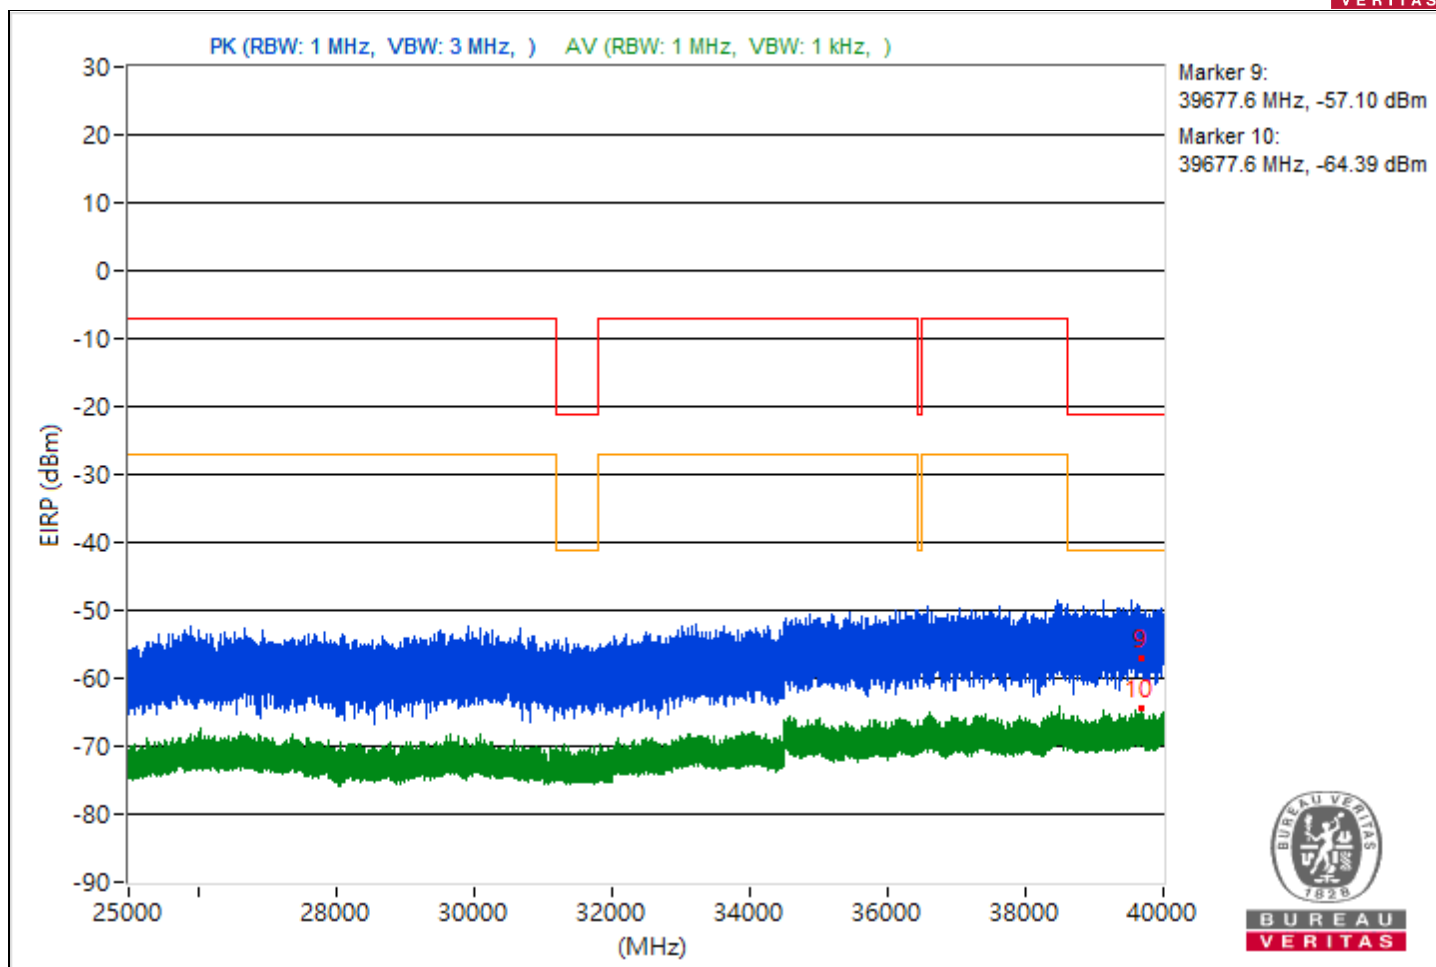


|                 |                              |                          |                  |
|-----------------|------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                  |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5456.28         | 46.11 PK                | 74             | -27.89      | -57.52                  | 8.37                   | -49.15           |
| 2                            | 5456.28         | 37.45 AV                | 54             | -16.55      | -66.18                  | 8.37                   | -57.81           |
| 3                            | 7257.92         | 48.23 PK                | 74             | -25.77      | -55.4                   | 8.37                   | -47.03           |
| 4                            | 7257.92         | 36.41 AV                | 54             | -17.59      | -67.22                  | 8.37                   | -58.85           |
| 5                            | 21220.8         | 45.88 PK                | 74             | -28.12      | -57.75                  | 8.37                   | -49.38           |
| 6                            | 21220.8         | 34.65 AV                | 54             | -19.35      | -68.98                  | 8.37                   | -60.61           |
| 7                            | 23925.6         | 48.76 PK                | 74             | -25.24      | -54.87                  | 8.37                   | -46.5            |
| 8                            | 23925.6         | 35.54 AV                | 54             | -18.46      | -68.09                  | 8.37                   | -59.72           |
| 9                            | 39563.82        | 41.83 PK                | 74             | -32.17      | -61.8                   | 8.37                   | -53.43           |
| 10                           | 39563.82        | 31.02 AV                | 54             | -22.98      | -72.61                  | 8.37                   | -64.24           |

Note: Margin value = Emission Level - Limit value

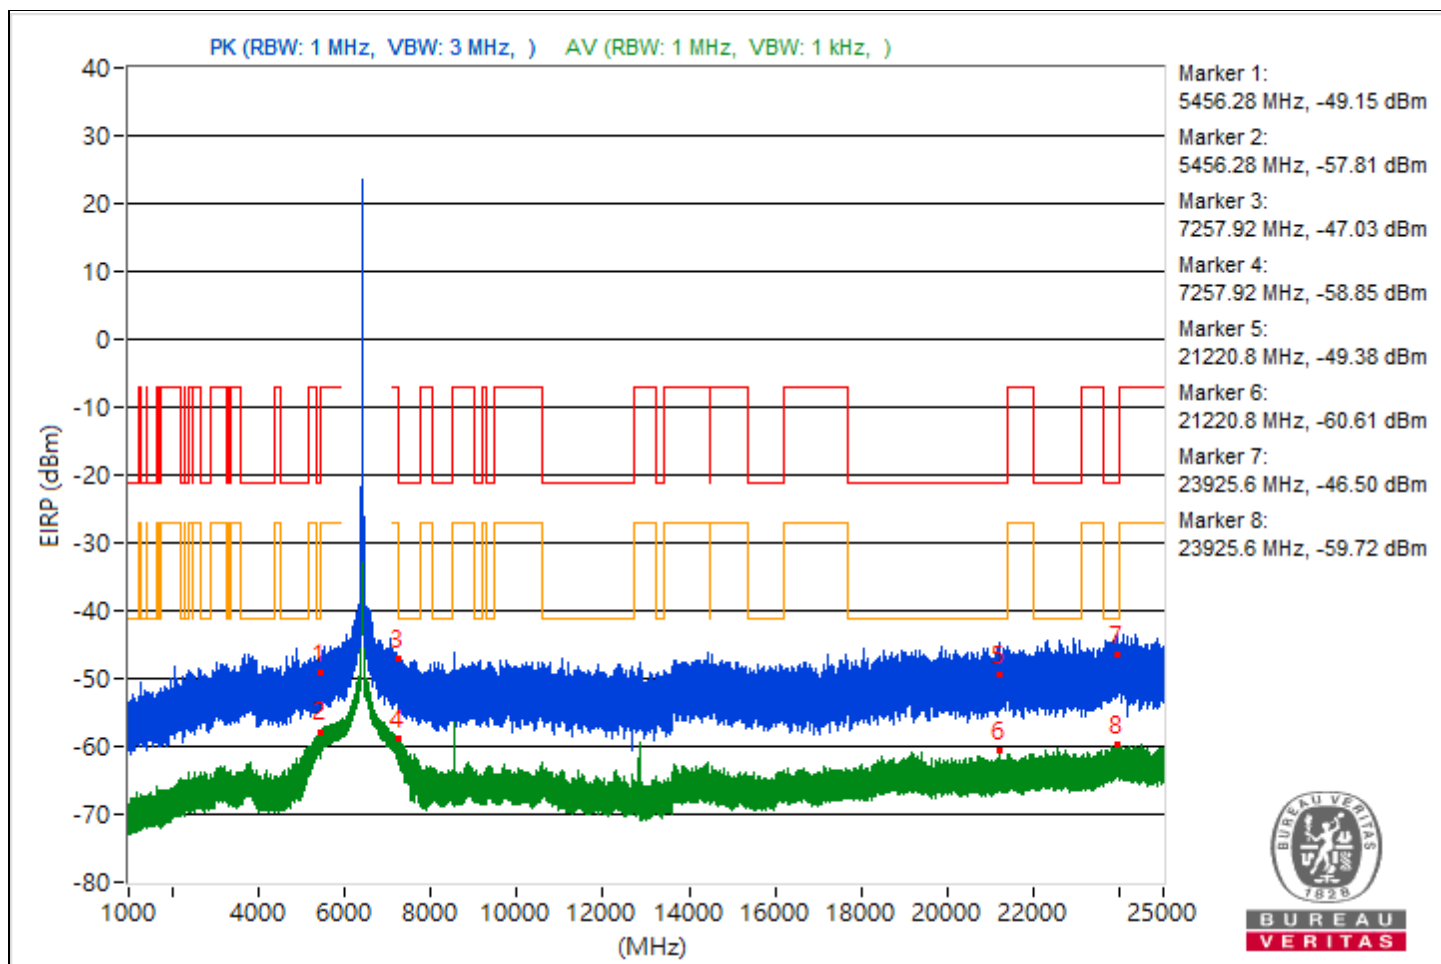


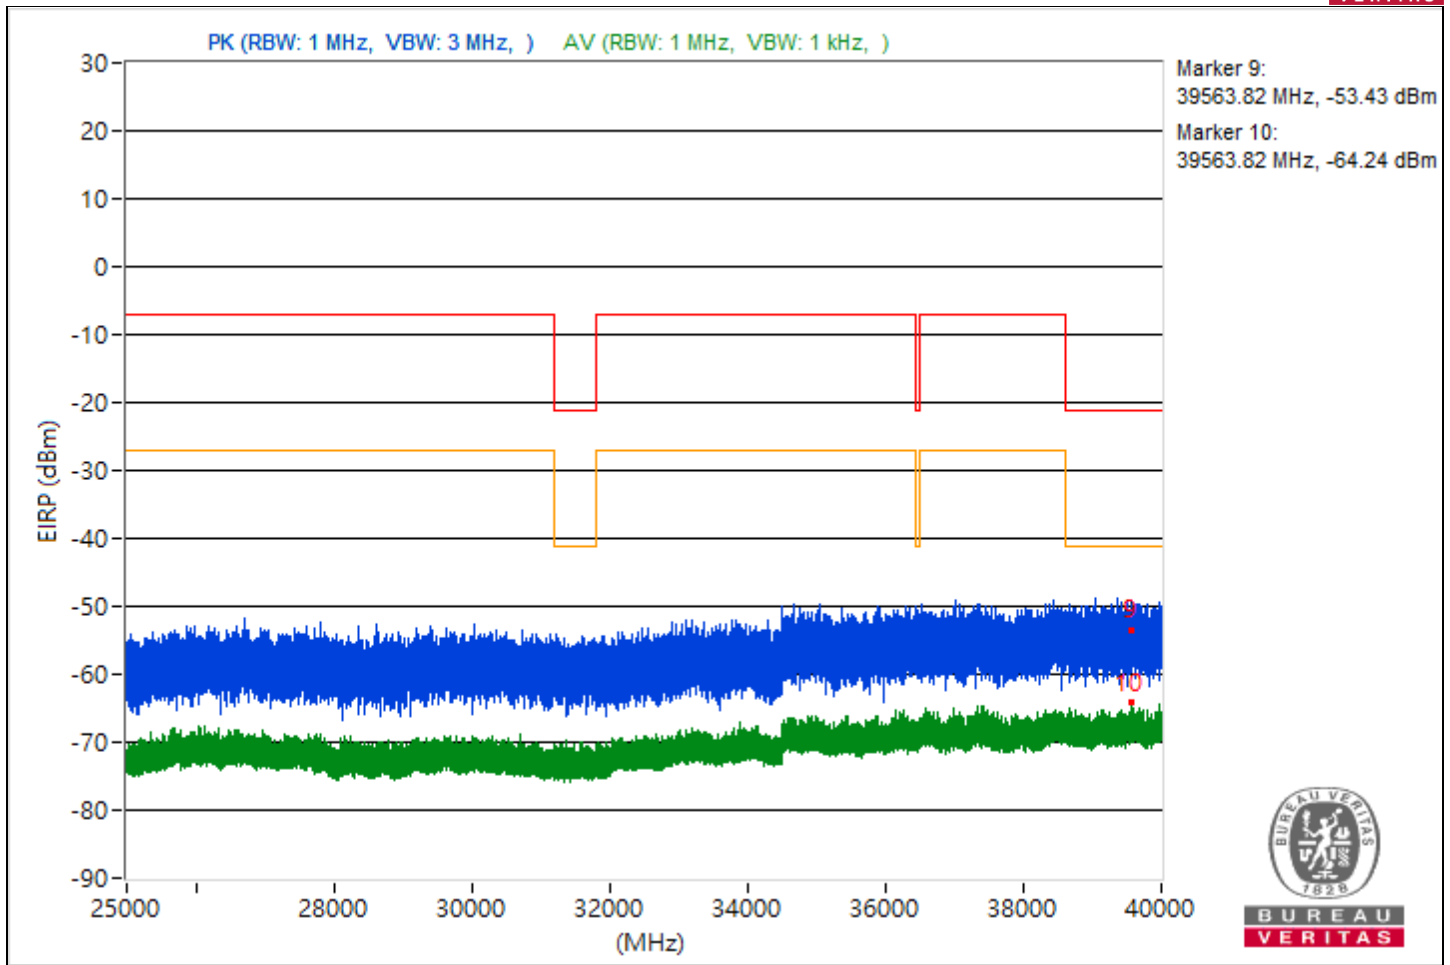


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                  |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5454.57         | 47.81 PK                | 74             | -26.19      | -55.82                  | 8.37                   | -47.45           |
| 2                            | 5454.57         | 36.67 AV                | 54             | -17.33      | -66.96                  | 8.37                   | -58.59           |
| 3                            | 7252.71         | 46.48 PK                | 74             | -27.52      | -57.15                  | 8.37                   | -48.78           |
| 4                            | 7252.71         | 36.59 AV                | 54             | -17.41      | -67.04                  | 8.37                   | -58.67           |
| 5                            | 20648.1         | 43.21 PK                | 74             | -30.79      | -60.42                  | 8.37                   | -52.05           |
| 6                            | 20648.1         | 34.39 AV                | 54             | -19.61      | -69.24                  | 8.37                   | -60.87           |
| 7                            | 23999           | 45.62 PK                | 74             | -28.38      | -58.01                  | 8.37                   | -49.64           |
| 8                            | 23999           | 36.22 AV                | 54             | -17.78      | -67.41                  | 8.37                   | -59.04           |
| 9                            | 39546.58        | 36.11 PK                | 74             | -37.89      | -67.52                  | 8.37                   | -59.15           |
| 10                           | 39546.58        | 30.3 AV                 | 54             | -23.7       | -73.33                  | 8.37                   | -64.96           |

Note: Margin value = Emission Level - Limit value

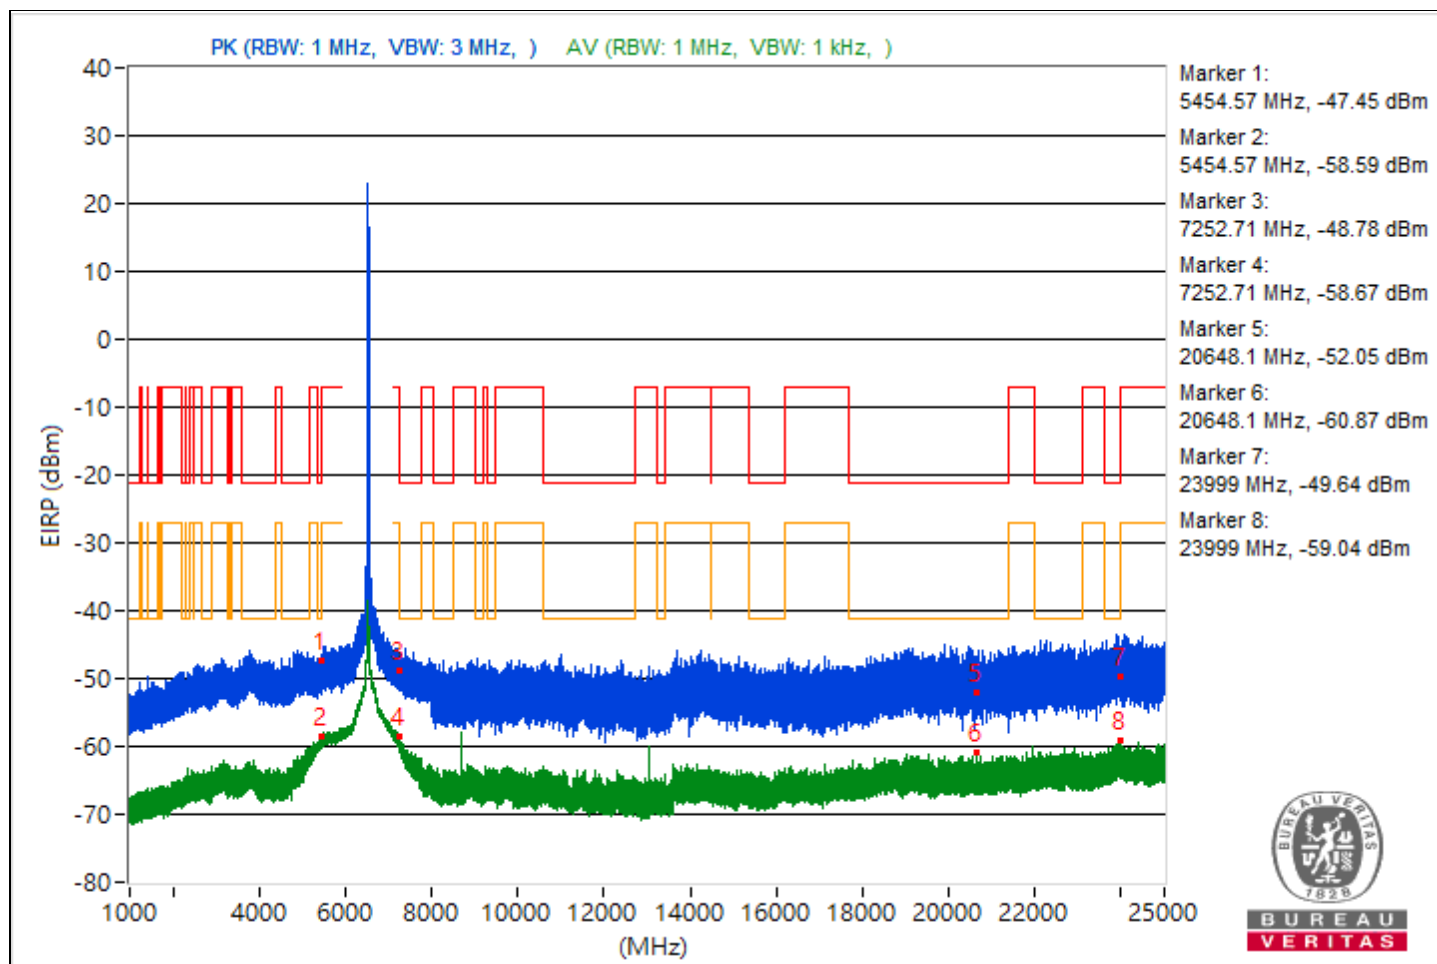


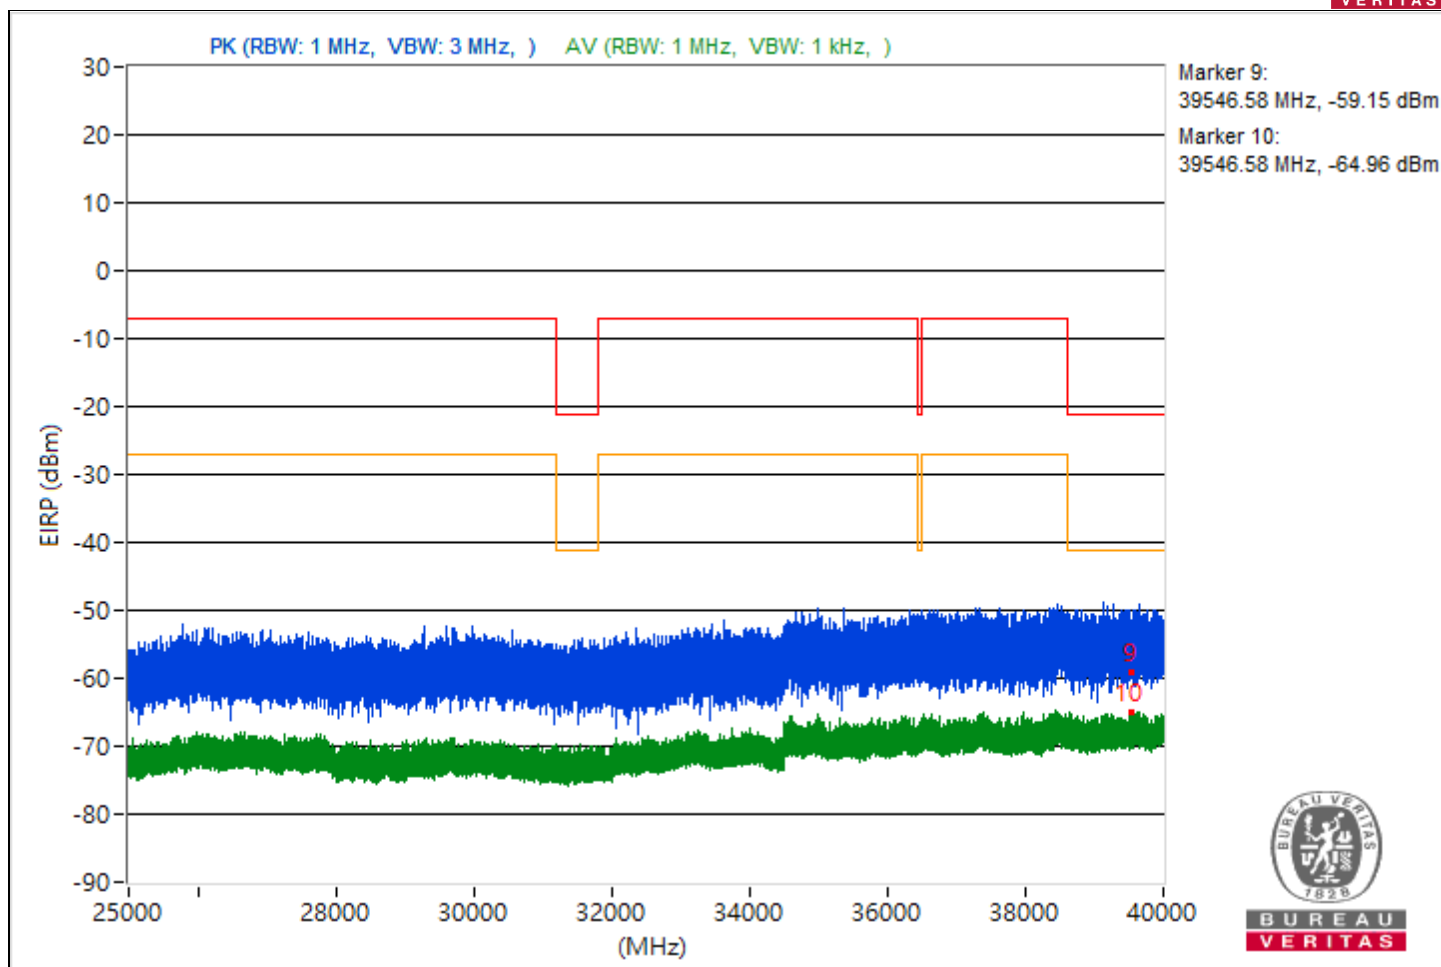


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz               | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                  |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5441.81         | 43.28 PK                | 74             | -30.72      | -60.35                  | 8.37                   | -51.98           |
| 2                            | 5441.81         | 35.54 AV                | 54             | -18.46      | -68.09                  | 8.37                   | -59.72           |
| 3                            | 7256.99         | 45.92 PK                | 74             | -28.08      | -57.71                  | 8.37                   | -49.34           |
| 4                            | 7256.99         | 39.59 AV                | 54             | -14.41      | -64.04                  | 8.37                   | -55.67           |
| 5                            | 21117.9         | 45.75 PK                | 74             | -28.25      | -57.88                  | 8.37                   | -49.51           |
| 6                            | 21117.9         | 34.12 AV                | 54             | -19.88      | -69.51                  | 8.37                   | -61.14           |
| 7                            | 23966.3         | 51.32 PK                | 74             | -22.68      | -52.31                  | 8.37                   | -43.94           |
| 8                            | 23966.3         | 35.48 AV                | 54             | -18.52      | -68.15                  | 8.37                   | -59.78           |
| 9                            | 39591.64        | 40.17 PK                | 74             | -33.83      | -63.46                  | 8.37                   | -55.09           |
| 10                           | 39591.64        | 30.67 AV                | 54             | -23.33      | -72.96                  | 8.37                   | -64.59           |

Note: Margin value = Emission Level - Limit value

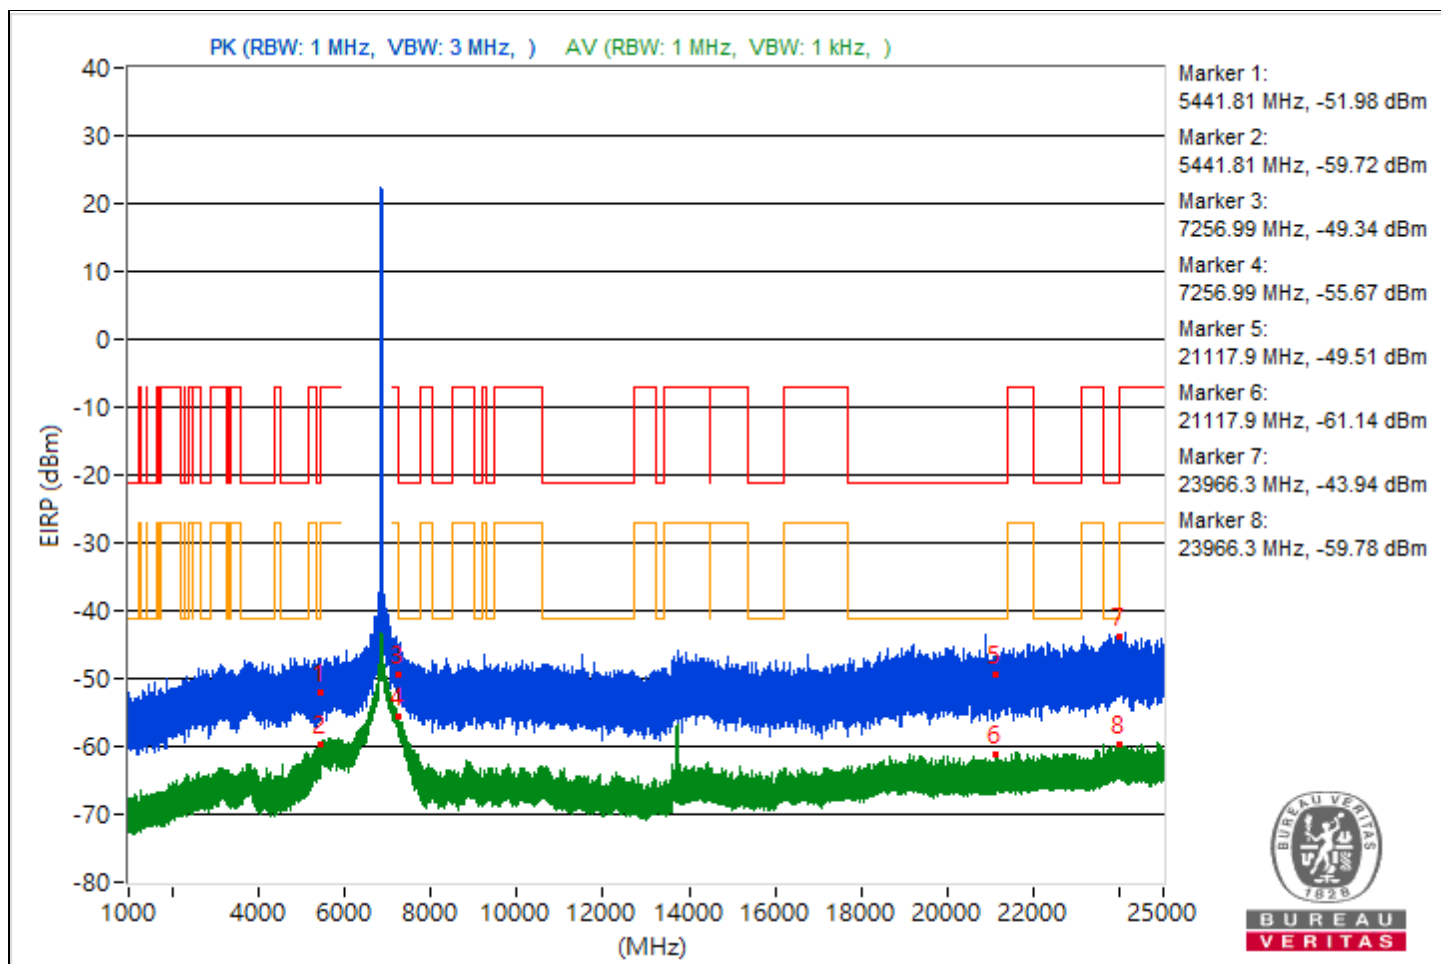


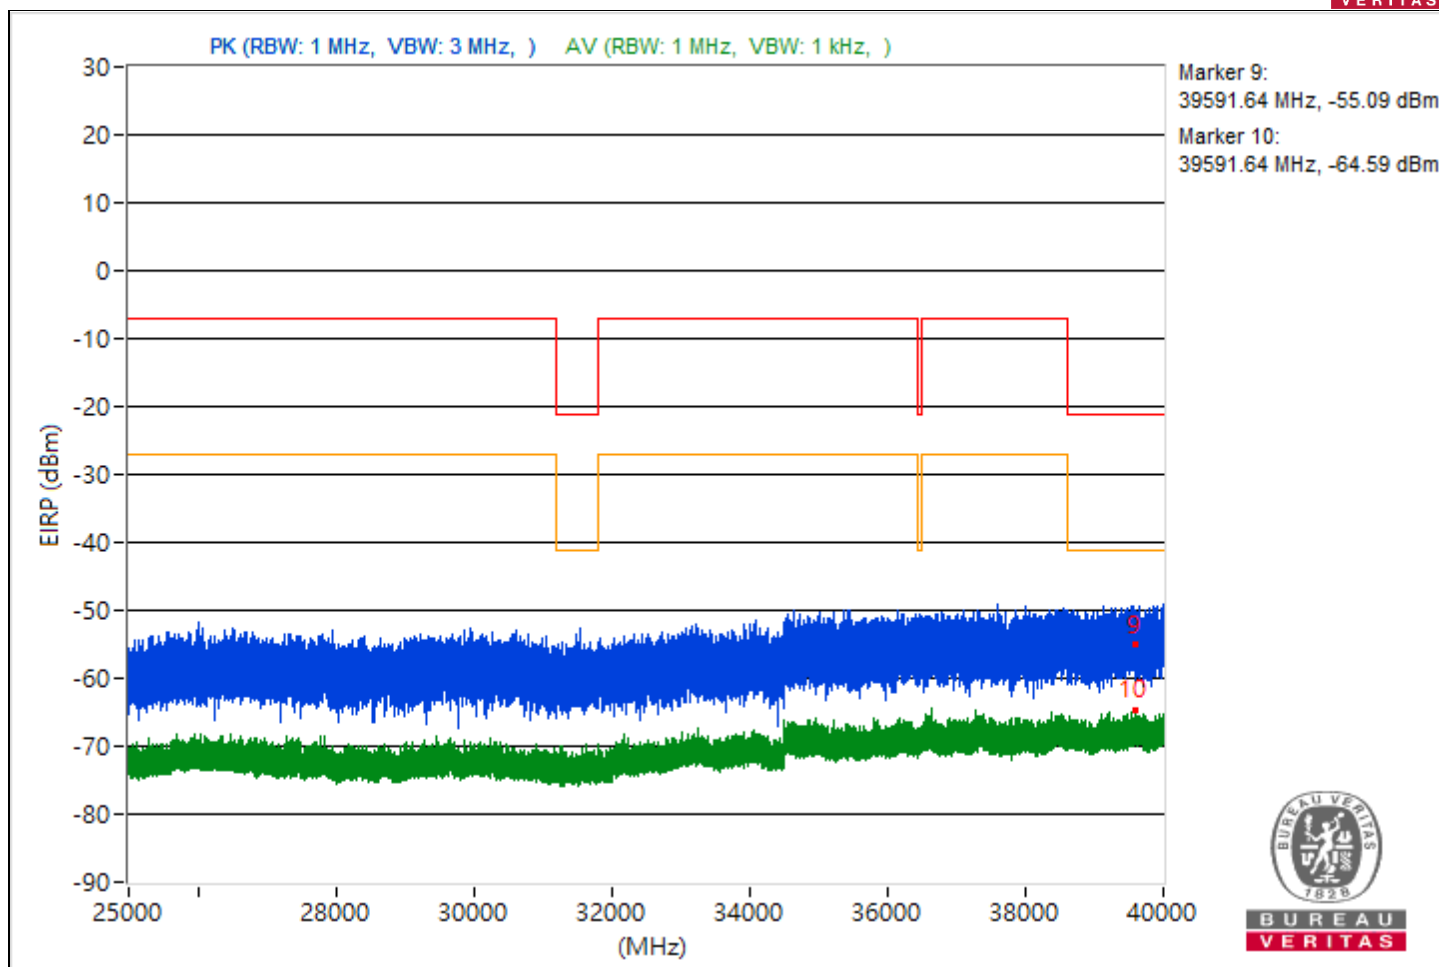


|                 |                                |                          |                 |
|-----------------|--------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                 | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                    |                          |                 |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5453.32         | 49.63 PK                | 74             | -24.37      | -54                     | 8.37                   | -45.63           |
| 2                            | 5453.32         | 39.78 AV                | 54             | -14.22      | -63.85                  | 8.37                   | -55.48           |
| 3                            | 11900.71        | 49.59 PK                | 74             | -24.41      | -54.04                  | 8.37                   | -45.67           |
| 4                            | 11900.71        | 40.6 AV                 | 54             | -13.4       | -63.03                  | 8.37                   | -54.66           |
| 5                            | 21177           | 44.49 PK                | 74             | -29.51      | -59.14                  | 8.37                   | -50.77           |
| 6                            | 21177           | 34.19 AV                | 54             | -19.81      | -69.44                  | 8.37                   | -61.07           |
| 7                            | 23736.6         | 45.81 PK                | 74             | -28.19      | -57.82                  | 8.37                   | -49.45           |
| 8                            | 23736.6         | 36.24 AV                | 54             | -17.76      | -67.39                  | 8.37                   | -59.02           |
| 9                            | 39637.87        | 40.67 PK                | 74             | -33.33      | -62.96                  | 8.37                   | -54.59           |
| 10                           | 39637.87        | 30.7 AV                 | 54             | -23.3       | -72.93                  | 8.37                   | -64.56           |

Note: Margin value = Emission Level - Limit value

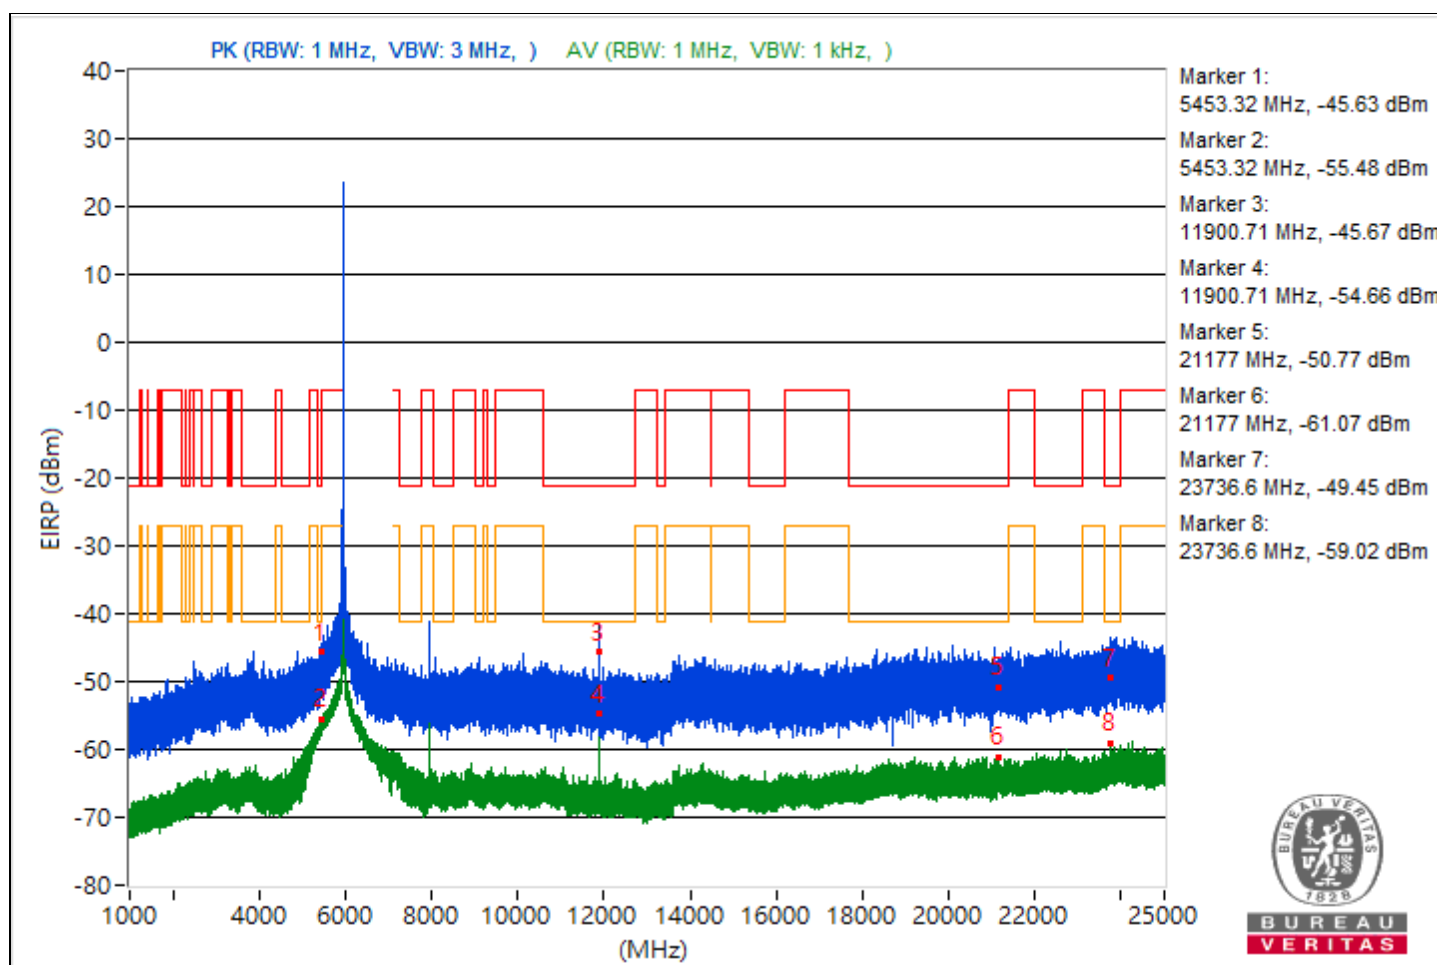


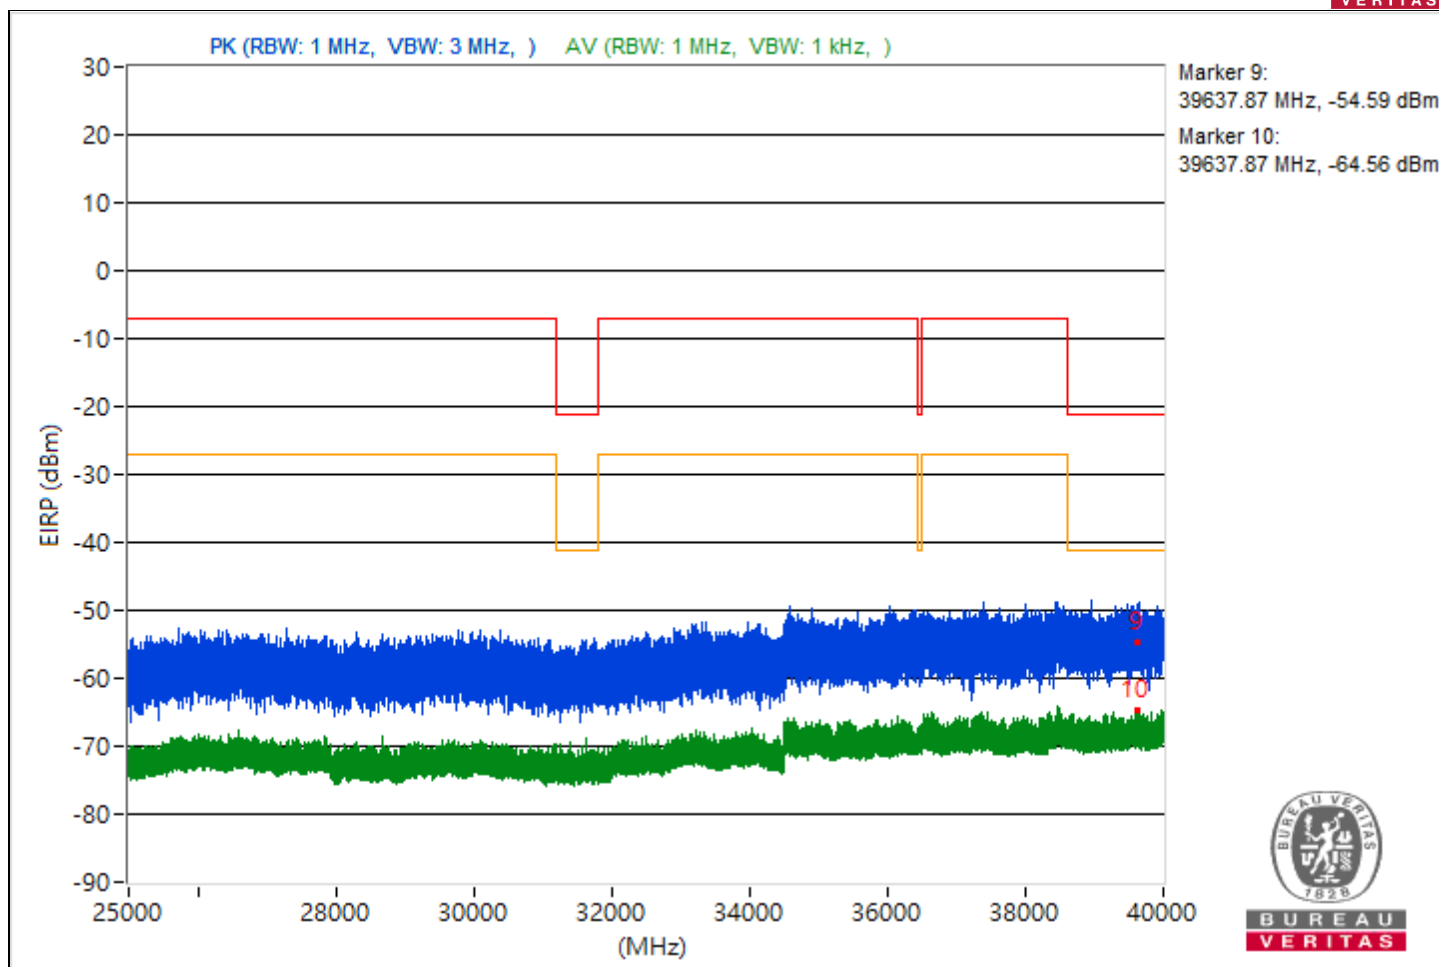


|                 |                                |                          |                  |
|-----------------|--------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                 | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                    |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5457.83         | 46.82 PK                | 74             | -27.18      | -56.81                  | 8.37                   | -48.44           |
| 2                            | 5457.83         | 37.66 AV                | 54             | -16.34      | -65.97                  | 8.37                   | -57.6            |
| 3                            | 7276.67         | 44.07 PK                | 74             | -29.93      | -59.56                  | 8.37                   | -51.19           |
| 4                            | 7276.67         | 36.47 AV                | 54             | -17.53      | -67.16                  | 8.37                   | -58.79           |
| 5                            | 20775.2         | 44.04 PK                | 74             | -29.96      | -59.59                  | 8.37                   | -51.22           |
| 6                            | 20775.2         | 33.99 AV                | 54             | -20.01      | -69.64                  | 8.37                   | -61.27           |
| 7                            | 22754.2         | 44.55 PK                | 74             | -29.45      | -59.08                  | 8.37                   | -50.71           |
| 8                            | 22754.2         | 35.3 AV                 | 54             | -18.7       | -68.33                  | 8.37                   | -59.96           |
| 9                            | 39609.42        | 45.08 PK                | 74             | -28.92      | -58.55                  | 8.37                   | -50.18           |
| 10                           | 39609.42        | 31.16 AV                | 54             | -22.84      | -72.47                  | 8.37                   | -64.1            |

Note: Margin value = Emission Level - Limit value

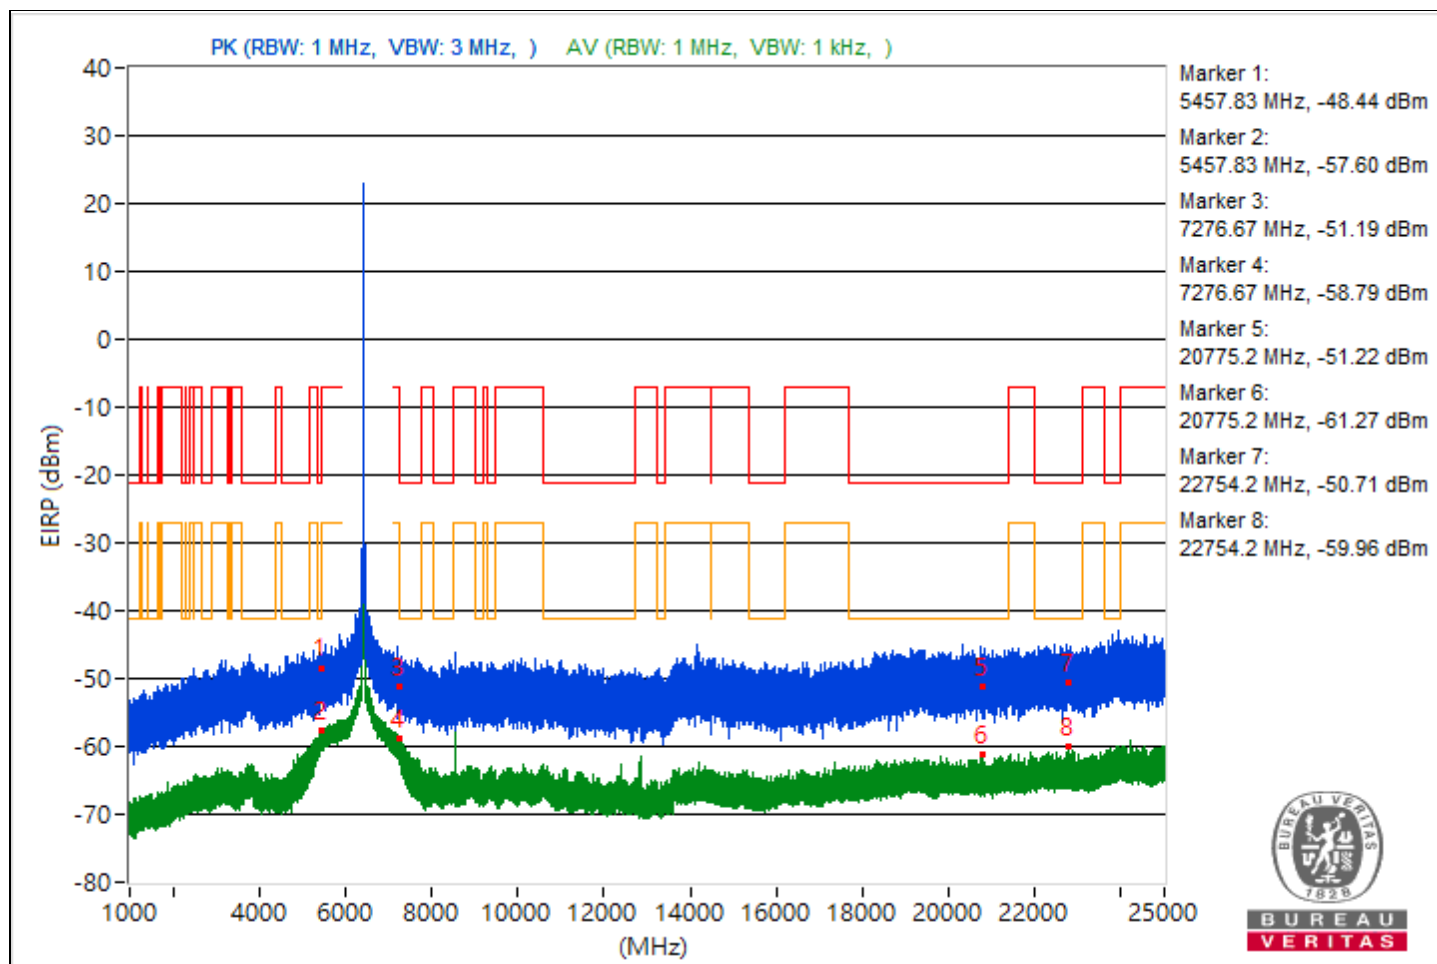


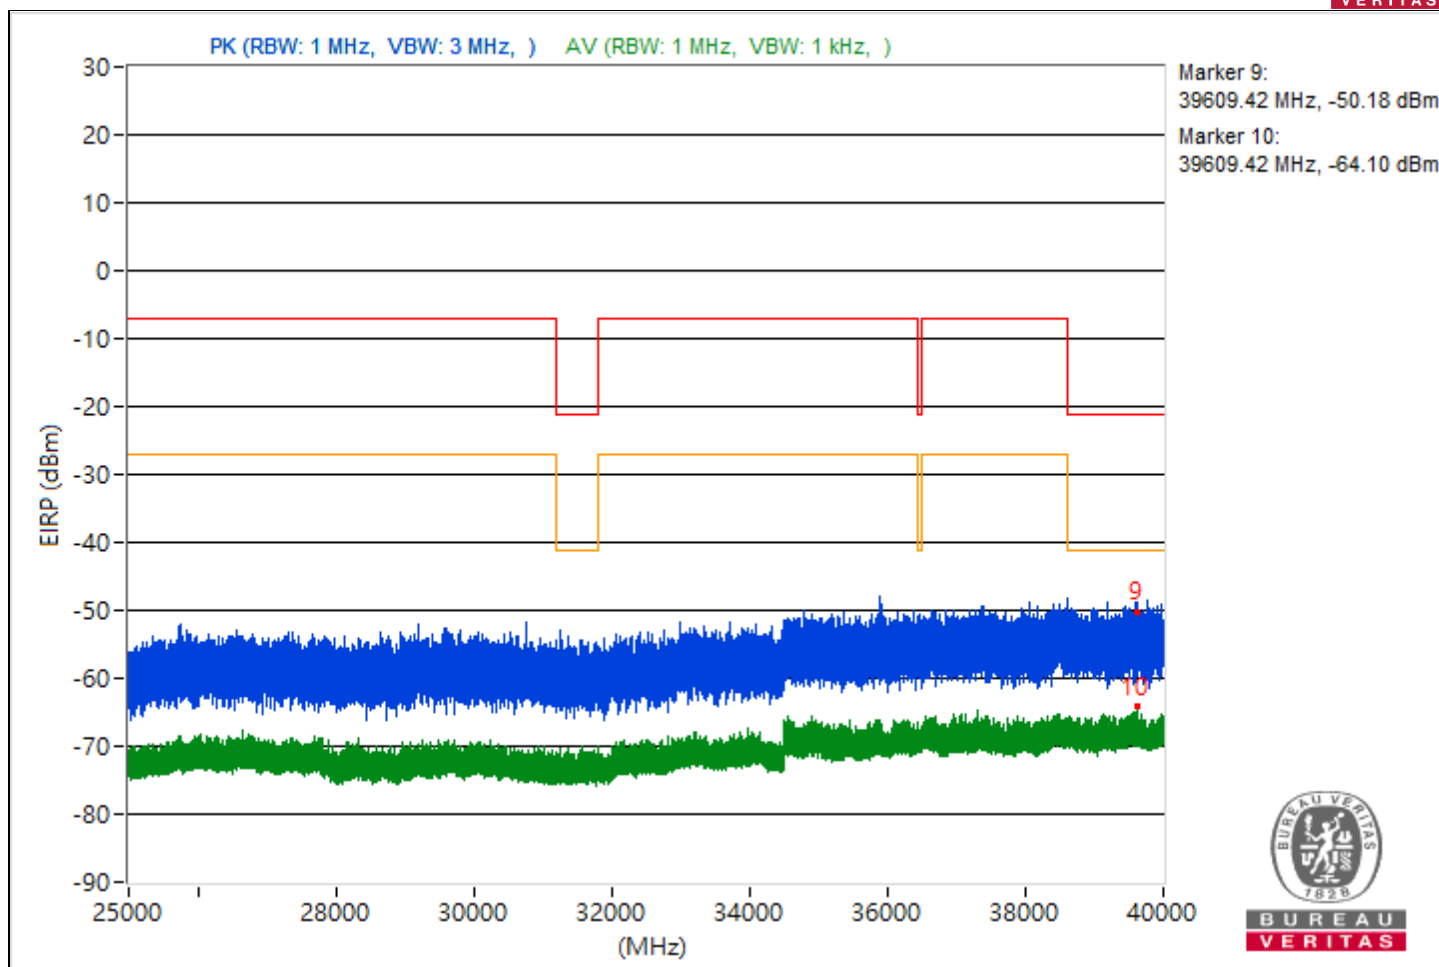

|                 |                                |                          |                   |
|-----------------|--------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                 | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5456.12         | 44.25 PK                | 74             | -29.75      | -59.38                  | 8.37                   | -51.01           |
| 2                            | 5456.12         | 36.33 AV                | 54             | -17.67      | -67.3                   | 8.37                   | -58.93           |
| 3                            | 7262.12         | 45.38 PK                | 74             | -28.62      | -58.25                  | 8.37                   | -49.88           |
| 4                            | 7262.12         | 36.1 AV                 | 54             | -17.9       | -67.53                  | 8.37                   | -59.16           |
| 5                            | 19152.4         | 43.68 PK                | 74             | -30.32      | -59.95                  | 8.37                   | -51.58           |
| 6                            | 19152.4         | 34.4 AV                 | 54             | -19.6       | -69.23                  | 8.37                   | -60.86           |
| 7                            | 23936.8         | 46.34 PK                | 74             | -27.66      | -57.29                  | 8.37                   | -48.92           |
| 8                            | 23936.8         | 36.75 AV                | 54             | -17.25      | -66.88                  | 8.37                   | -58.51           |
| 9                            | 39084.18        | 38.72 PK                | 74             | -35.28      | -64.91                  | 8.37                   | -56.54           |
| 10                           | 39084.18        | 30.29 AV                | 54             | -23.71      | -73.34                  | 8.37                   | -64.97           |

Note: Margin value = Emission Level - Limit value

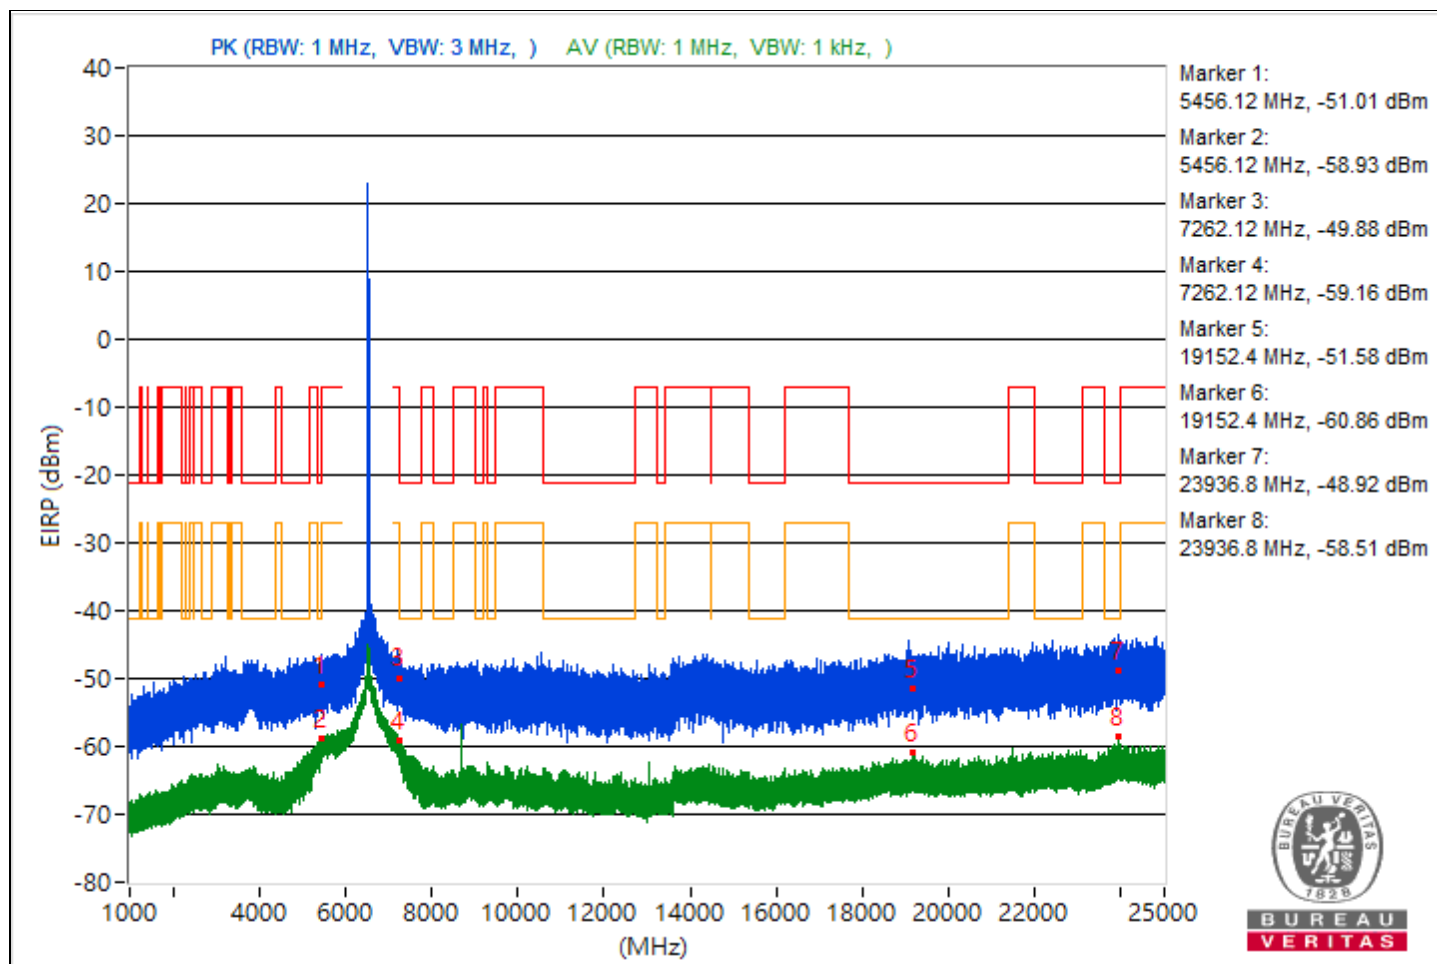





|                 |                                |                          |                   |
|-----------------|--------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                 | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                    |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5438.54         | 43.41 PK                | 74             | -30.59      | -60.22                  | 8.37                   | -51.85           |
| 2                            | 5438.54         | 35.72 AV                | 54             | -18.28      | -67.91                  | 8.37                   | -59.54           |
| 3                            | 7258.78         | 45.73 PK                | 74             | -28.27      | -57.9                   | 8.37                   | -49.53           |
| 4                            | 7258.78         | 39.08 AV                | 54             | -14.92      | -64.55                  | 8.37                   | -56.18           |
| 5                            | 19391.6         | 46.77 PK                | 74             | -27.23      | -56.86                  | 8.37                   | -48.49           |
| 6                            | 19391.6         | 34.2 AV                 | 54             | -19.8       | -69.43                  | 8.37                   | -61.06           |
| 7                            | 23972.4         | 48.8 PK                 | 74             | -25.2       | -54.83                  | 8.37                   | -46.46           |
| 8                            | 23972.4         | 35.38 AV                | 54             | -18.62      | -68.25                  | 8.37                   | -59.88           |
| 9                            | 40000           | 37.71 PK                | 74             | -36.29      | -65.92                  | 8.37                   | -57.55           |
| 10                           | 40000           | 30.14 AV                | 54             | -23.86      | -73.49                  | 8.37                   | -65.12           |

Note: Margin value = Emission Level - Limit value

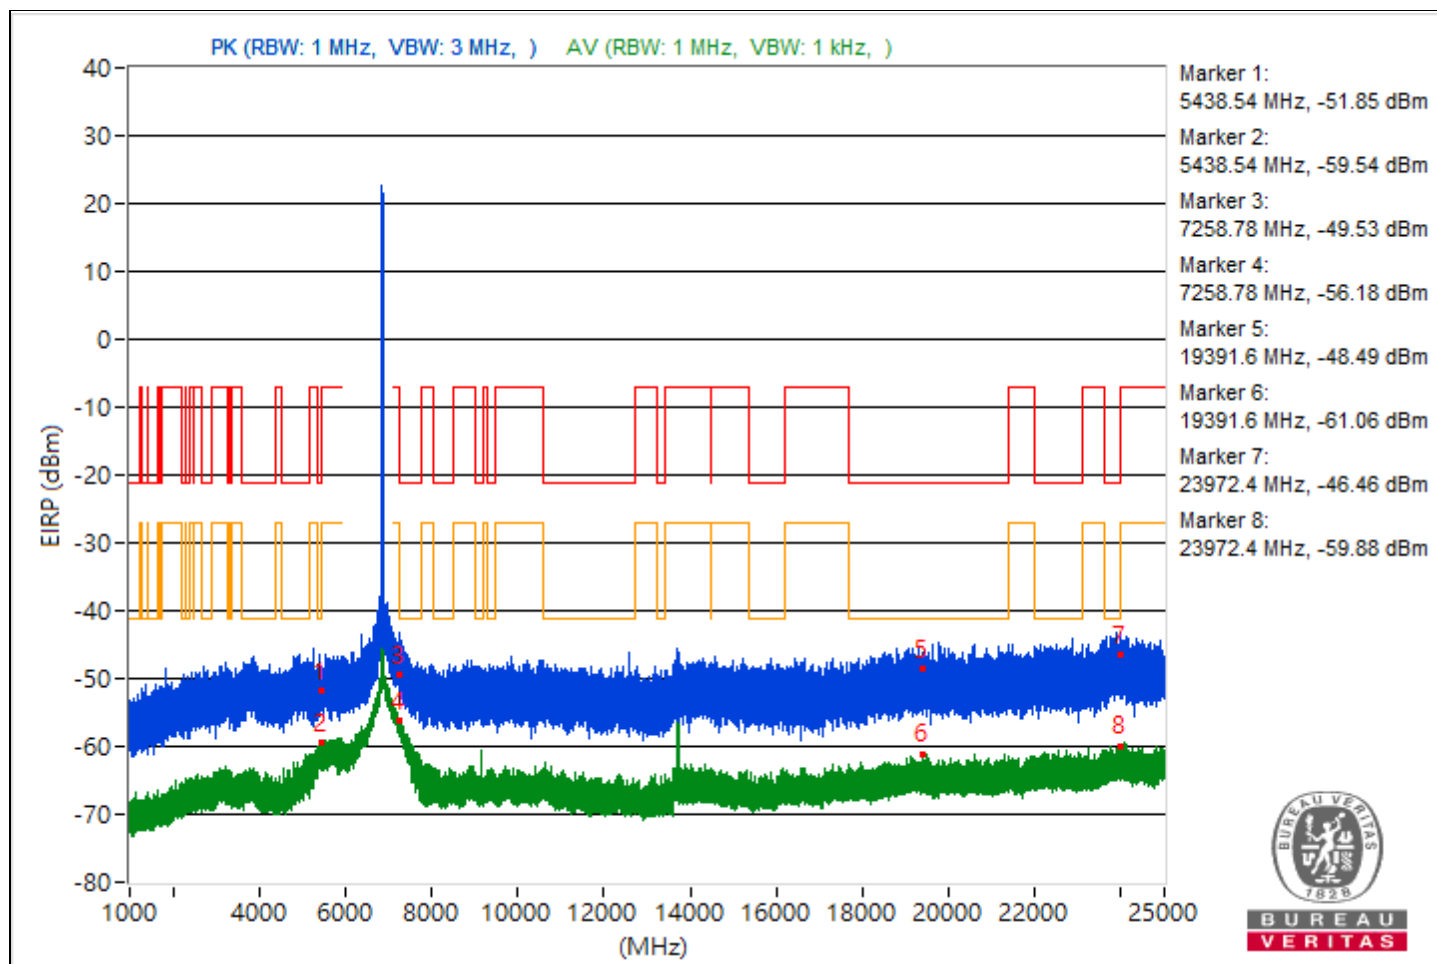

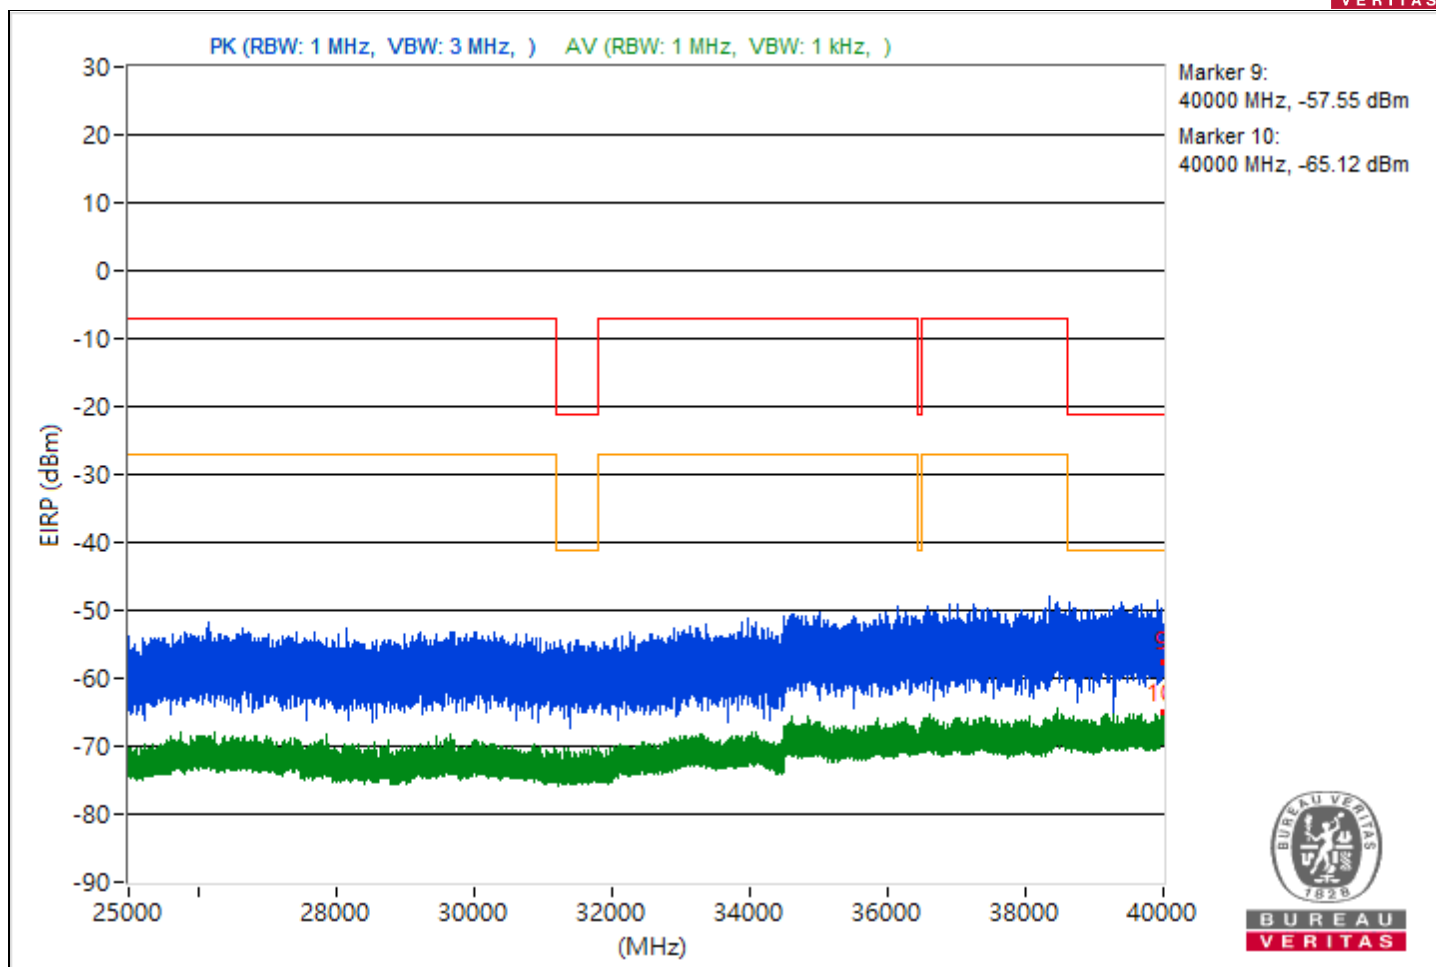



|                 |                                 |                          |                 |
|-----------------|---------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                     |                          |                 |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5449.74         | 45.97 PK                | 74             | -28.03      | -57.66                  | 8.37                   | -49.29           |
| 2   | 5449.74         | 39.76 AV                | 54             | -14.24      | -63.87                  | 8.37                   | -55.5            |
| 3   | 11903.2         | 50.44 PK                | 74             | -23.56      | -53.19                  | 8.37                   | -44.82           |
| 4   | 11903.2         | 40.88 AV                | 54             | -13.12      | -62.75                  | 8.37                   | -54.38           |
| 5   | 21348.9         | 45.31 PK                | 74             | -28.69      | -58.32                  | 8.37                   | -49.95           |
| 6   | 21348.9         | 34.16 AV                | 54             | -19.84      | -69.47                  | 8.37                   | -61.1            |
| 7   | 23983.1         | 49.25 PK                | 74             | -24.75      | -54.38                  | 8.37                   | -46.01           |
| 8   | 23983.1         | 35.91 AV                | 54             | -18.09      | -67.72                  | 8.37                   | -59.35           |
| 9   | 39687.38        | 37.63 PK                | 74             | -36.37      | -66                     | 8.37                   | -57.63           |
| 10  | 39687.38        | 30.33 AV                | 54             | -23.67      | -73.3                   | 8.37                   | -64.93           |

Note: Margin value = Emission Level - Limit value

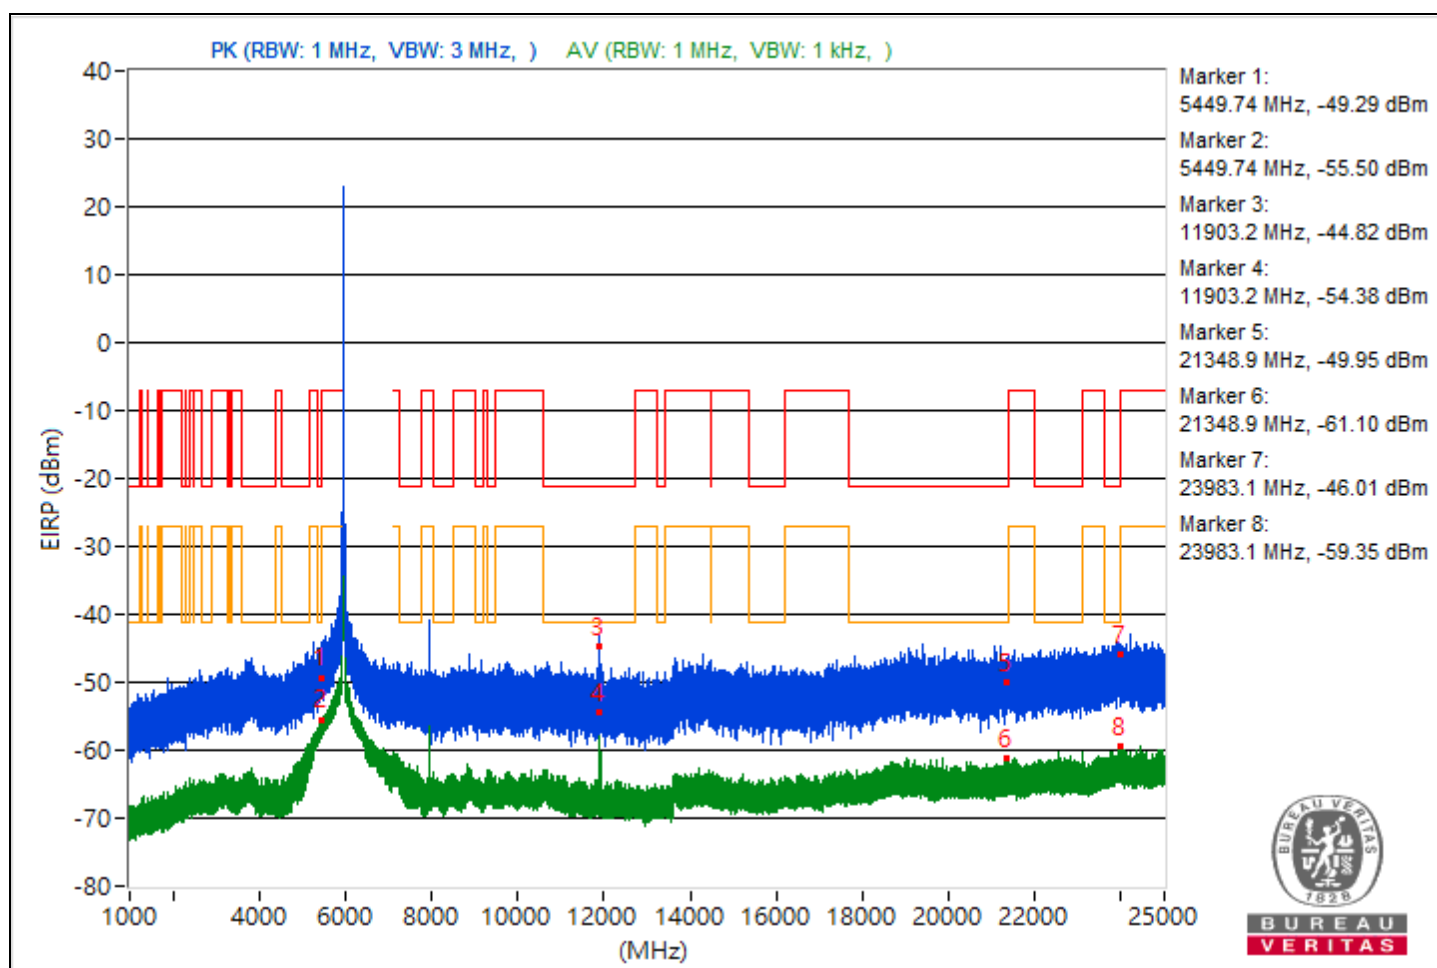


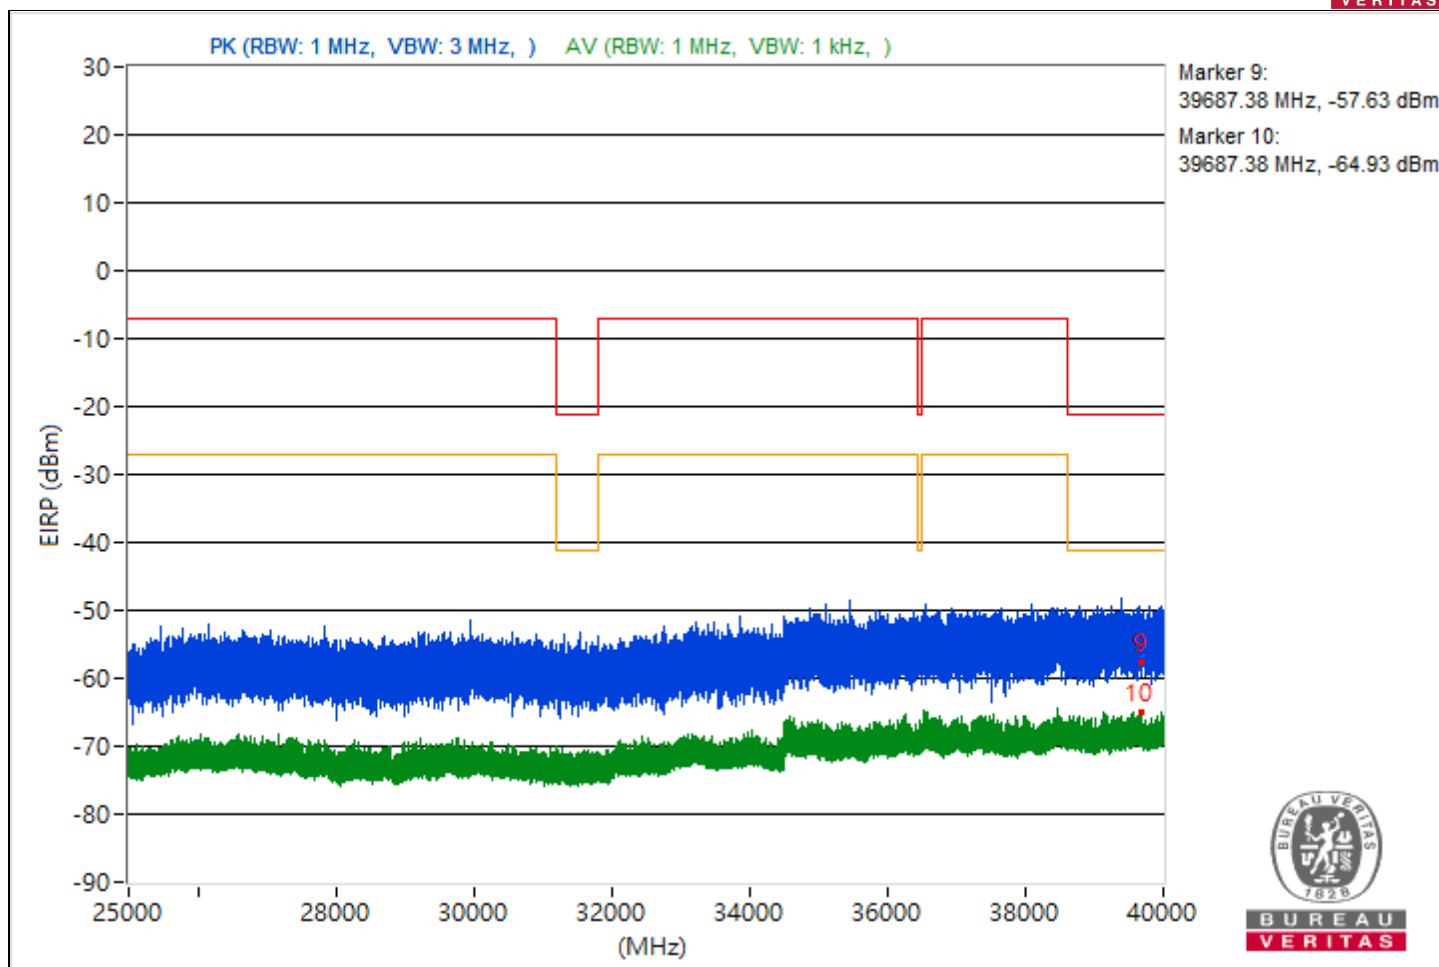


|                 |                                 |                          |                  |
|-----------------|---------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                     |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5454.41         | 43.73 PK                | 74             | -30.27      | -59.9                   | 8.37                   | -51.53           |
| 2                            | 5454.41         | 37.44 AV                | 54             | -16.56      | -66.19                  | 8.37                   | -57.82           |
| 3                            | 7251.31         | 46.55 PK                | 74             | -27.45      | -57.08                  | 8.37                   | -48.71           |
| 4                            | 7251.31         | 36.23 AV                | 54             | -17.77      | -67.4                   | 8.37                   | -59.03           |
| 5                            | 19220.6         | 47.05 PK                | 74             | -26.95      | -56.58                  | 8.37                   | -48.21           |
| 6                            | 19220.6         | 34.61 AV                | 54             | -19.39      | -69.02                  | 8.37                   | -60.65           |
| 7                            | 23944.3         | 46.95 PK                | 74             | -27.05      | -56.68                  | 8.37                   | -48.31           |
| 8                            | 23944.3         | 35.26 AV                | 54             | -18.74      | -68.37                  | 8.37                   | -60              |
| 9                            | 39655.82        | 38.15 PK                | 74             | -35.85      | -65.48                  | 8.37                   | -57.11           |
| 10                           | 39655.82        | 31.03 AV                | 54             | -22.97      | -72.6                   | 8.37                   | -64.23           |

Note: Margin value = Emission Level - Limit value

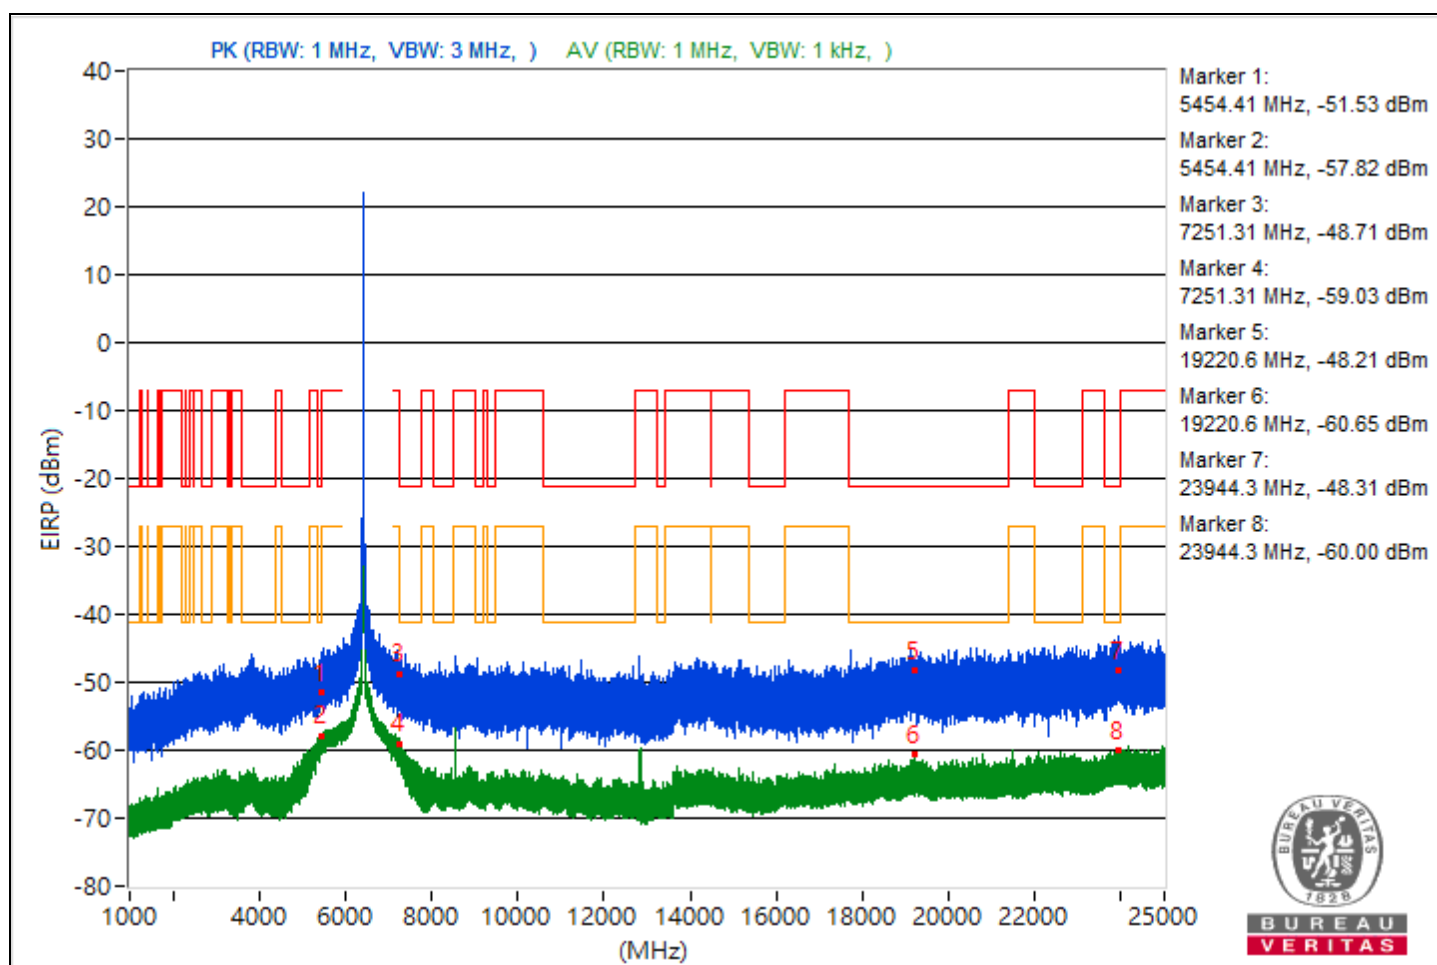

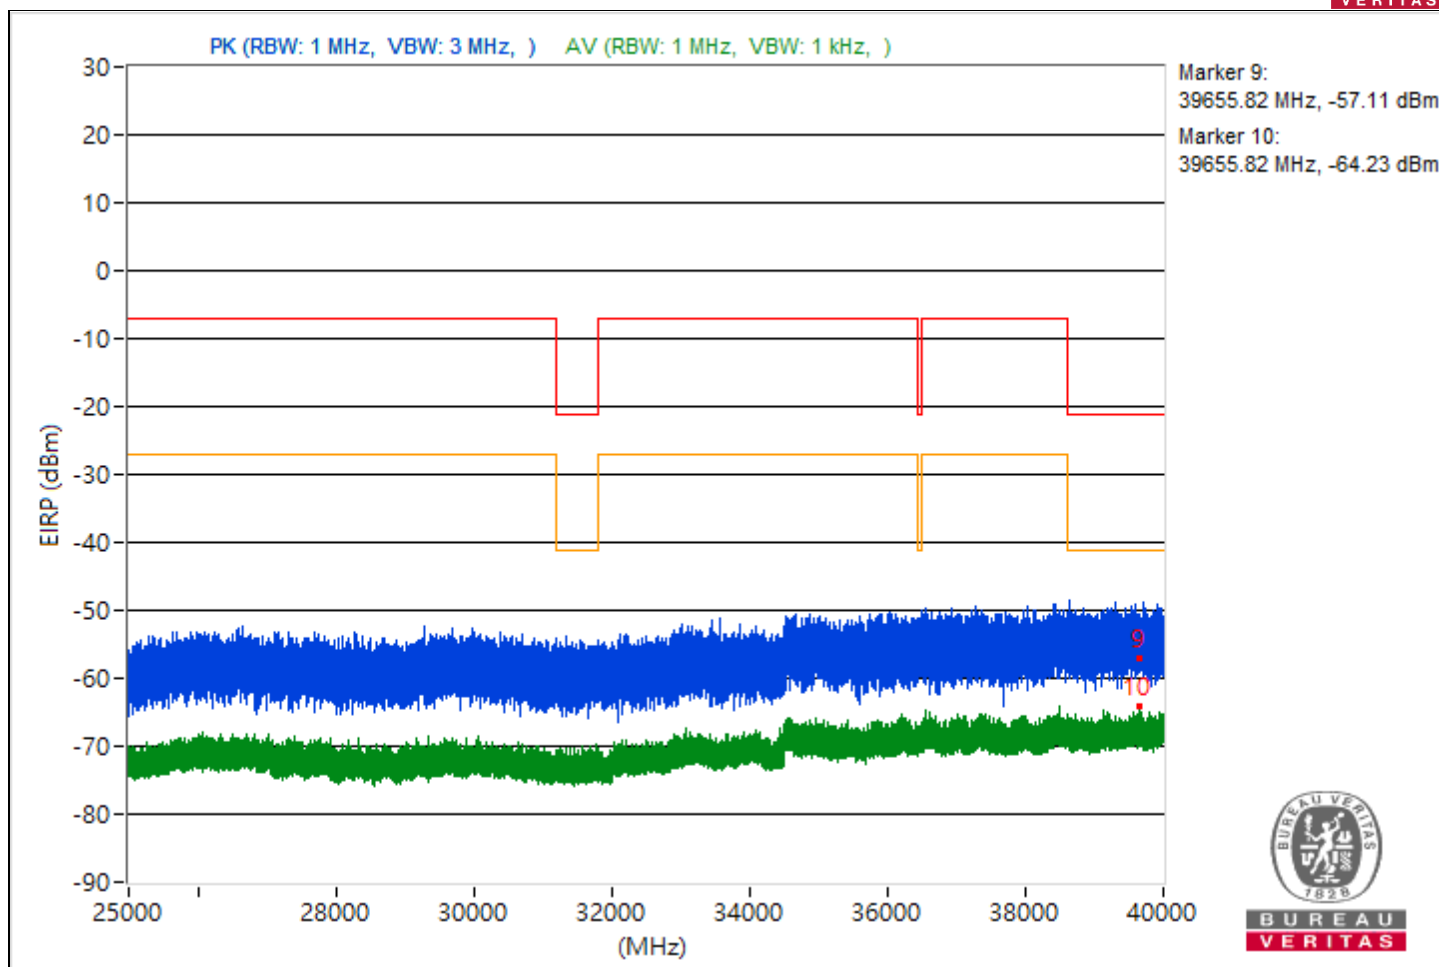



|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                     |                          |                   |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5445.39         | 44.91 PK                | 74             | -29.09      | -58.72                  | 8.37                   | -50.35           |
| 2   | 5445.39         | 36.55 AV                | 54             | -17.45      | -67.08                  | 8.37                   | -58.71           |
| 3   | 7260.18         | 44.78 PK                | 74             | -29.22      | -58.85                  | 8.37                   | -50.48           |
| 4   | 7260.18         | 36.32 AV                | 54             | -17.68      | -67.31                  | 8.37                   | -58.94           |
| 5   | 19836.1         | 45.58 PK                | 74             | -28.42      | -58.05                  | 8.37                   | -49.68           |
| 6   | 19836.1         | 34.61 AV                | 54             | -19.39      | -69.02                  | 8.37                   | -60.65           |
| 7   | 23960.8         | 44.96 PK                | 74             | -29.04      | -58.67                  | 8.37                   | -50.3            |
| 8   | 23960.8         | 36.24 AV                | 54             | -17.76      | -67.39                  | 8.37                   | -59.02           |
| 9   | 39619.82        | 40.7 PK                 | 74             | -33.3       | -62.93                  | 8.37                   | -54.56           |
| 10  | 39619.82        | 31.23 AV                | 54             | -22.77      | -72.4                   | 8.37                   | -64.03           |

Note: Margin value = Emission Level - Limit value

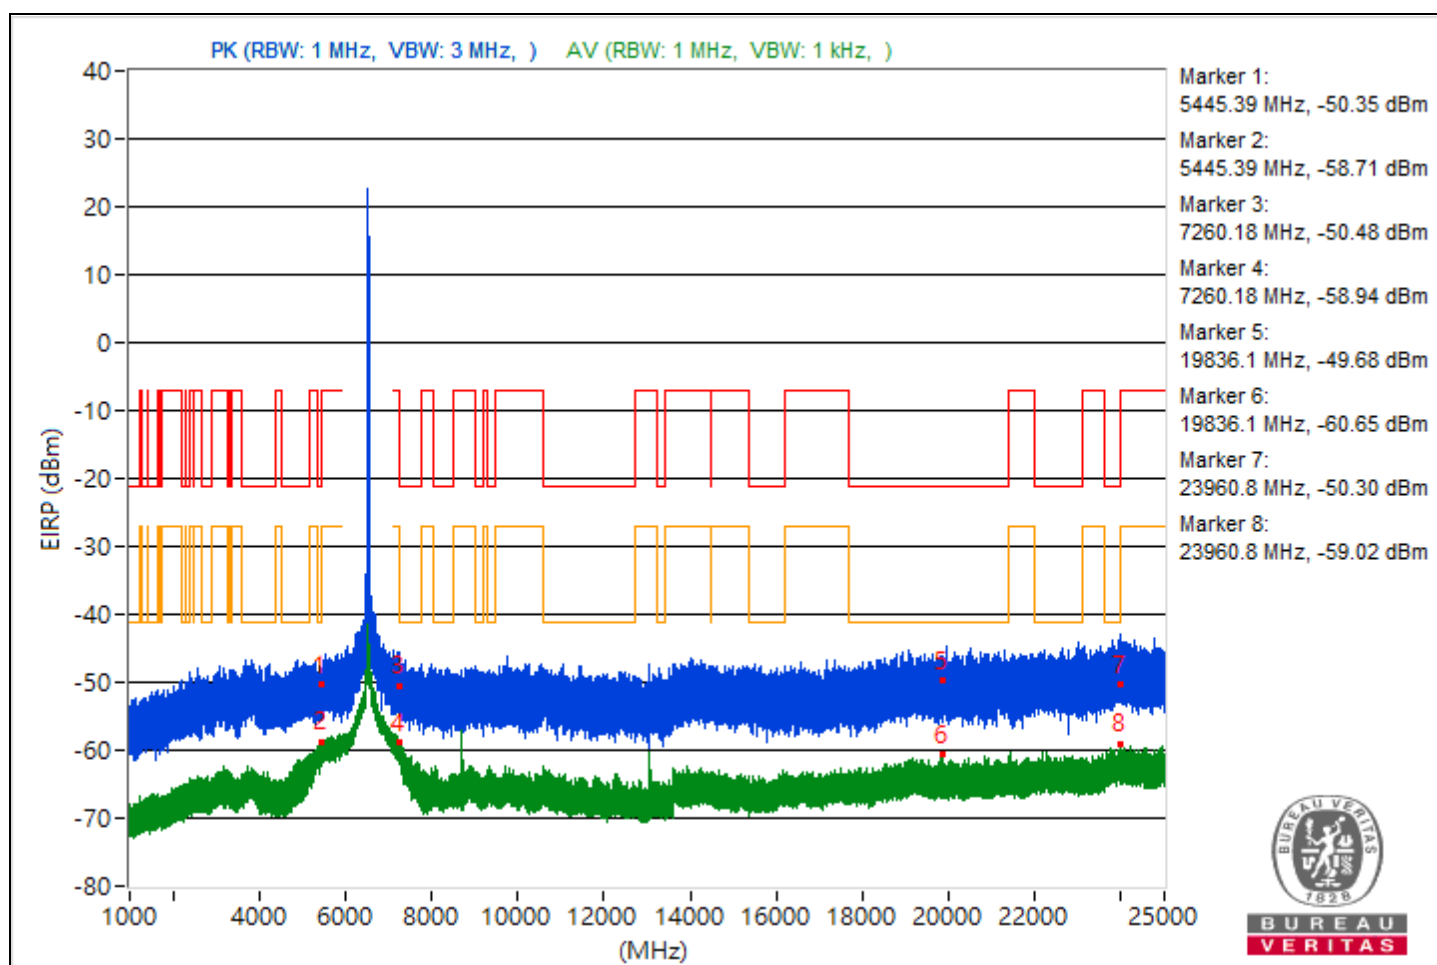


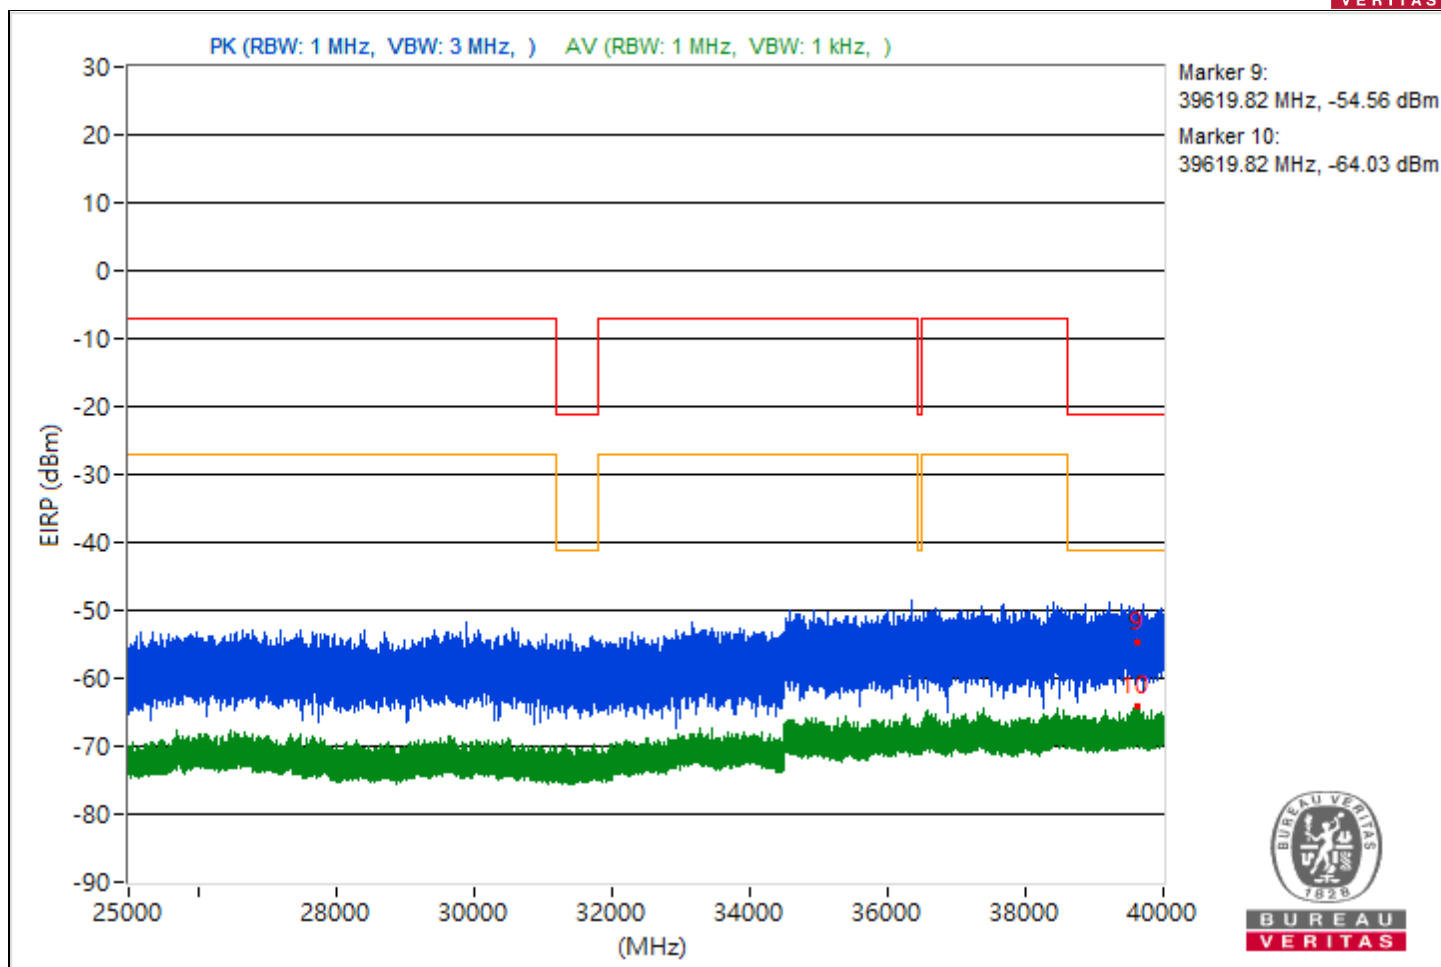


|                 |                                 |                          |                   |
|-----------------|---------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106+26-tone RU | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                  | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                     |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5449.98         | 45.51 PK                | 74             | -28.49      | -58.12                  | 8.37                   | -49.75           |
| 2                            | 5449.98         | 35.46 AV                | 54             | -18.54      | -68.17                  | 8.37                   | -59.8            |
| 3                            | 7261.5          | 47.06 PK                | 74             | -26.94      | -56.57                  | 8.37                   | -48.2            |
| 4                            | 7261.5          | 39.27 AV                | 54             | -14.73      | -64.36                  | 8.37                   | -55.99           |
| 5                            | 20624.9         | 45.48 PK                | 74             | -28.52      | -58.15                  | 8.37                   | -49.78           |
| 6                            | 20624.9         | 34.05 AV                | 54             | -19.95      | -69.58                  | 8.37                   | -61.21           |
| 7                            | 23997.6         | 47.1 PK                 | 74             | -26.9       | -56.53                  | 8.37                   | -48.16           |
| 8                            | 23997.6         | 35.56 AV                | 54             | -18.44      | -68.07                  | 8.37                   | -59.7            |
| 9                            | 39953.87        | 45.26 PK                | 74             | -28.74      | -58.37                  | 8.37                   | -50              |
| 10                           | 39953.87        | 30.9 AV                 | 54             | -23.1       | -72.73                  | 8.37                   | -64.36           |

Note: Margin value = Emission Level - Limit value

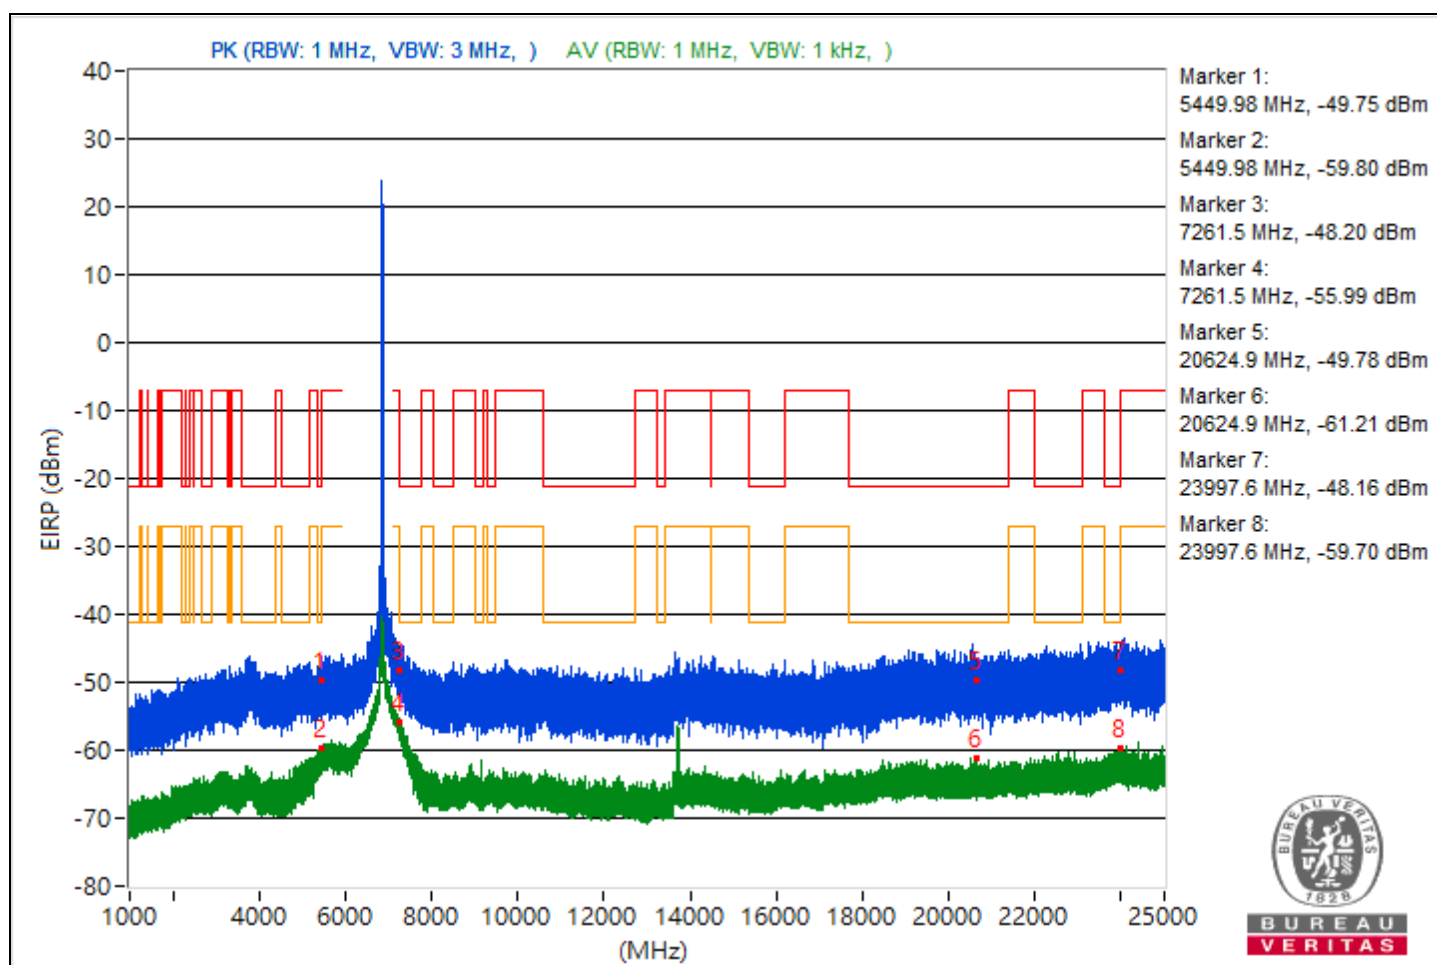

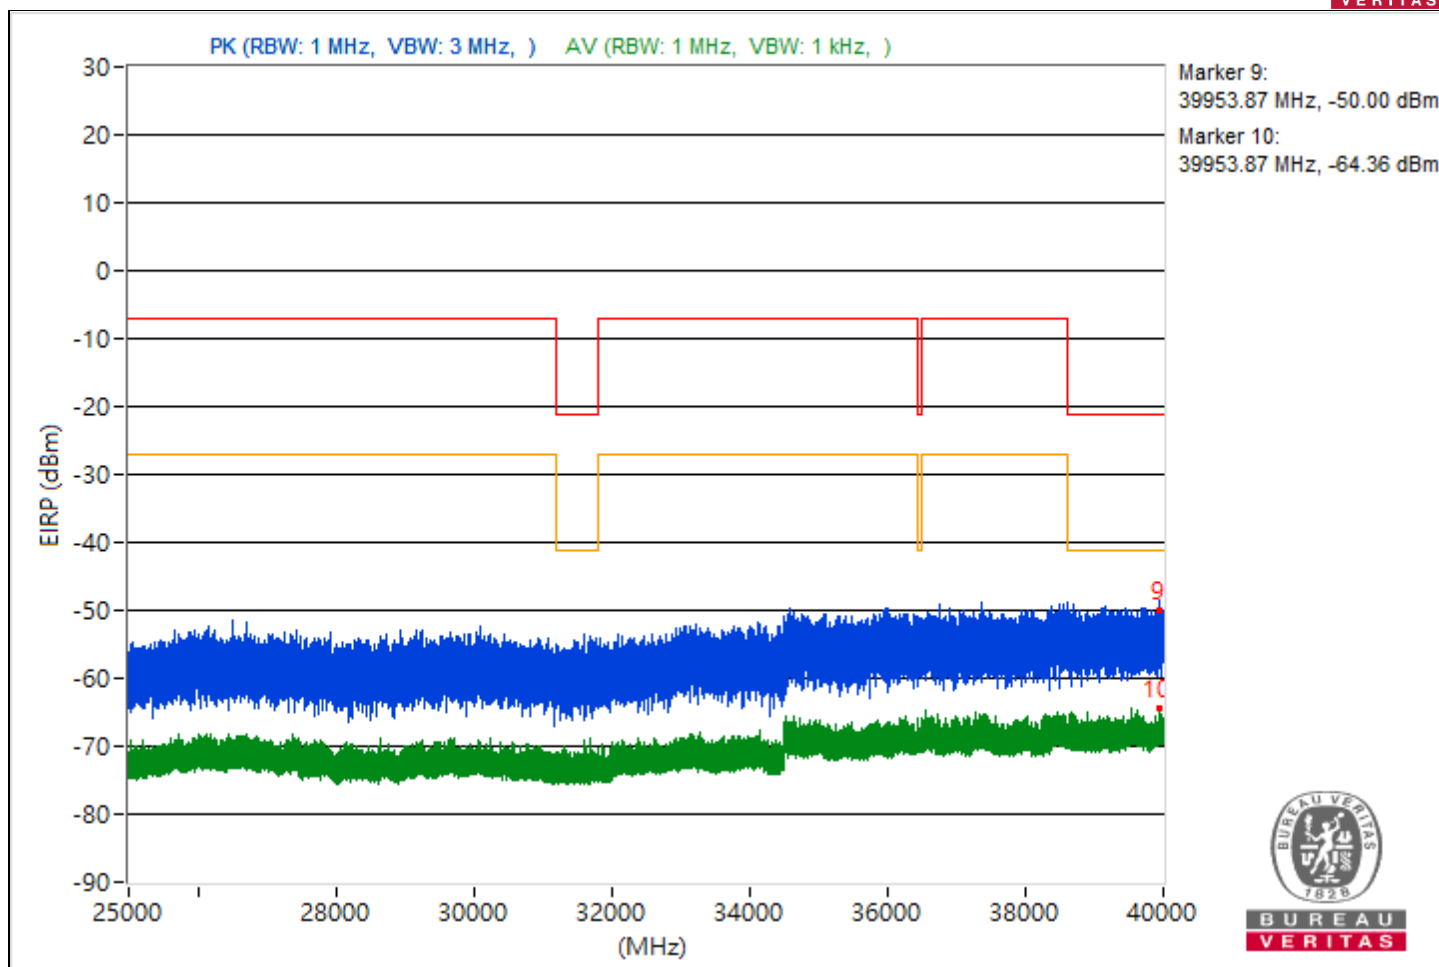



|                 |                                   |                          |                 |
|-----------------|-----------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 7 : 5985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                       |                          |                 |

#### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5445.47         | 48.16 PK                | 74             | -25.84      | -55.47                  | 8.37                   | -47.1            |
| 2   | 5445.47         | 39.67 AV                | 54             | -14.33      | -63.96                  | 8.37                   | -55.59           |
| 3   | 11953.69        | 46.35 PK                | 74             | -27.65      | -57.28                  | 8.37                   | -48.91           |
| 4   | 11953.69        | 39.28 AV                | 54             | -14.72      | -64.35                  | 8.37                   | -55.98           |
| 5   | 19455.6         | 44.07 PK                | 74             | -29.93      | -59.56                  | 8.37                   | -51.19           |
| 6   | 19455.6         | 34.55 AV                | 54             | -19.45      | -69.08                  | 8.37                   | -60.71           |
| 7   | 23886.2         | 48.1 PK                 | 74             | -25.9       | -55.53                  | 8.37                   | -47.16           |
| 8   | 23886.2         | 35.4 AV                 | 54             | -18.6       | -68.23                  | 8.37                   | -59.86           |
| 9   | 39994.22        | 41.99 PK                | 74             | -32.01      | -61.64                  | 8.37                   | -53.27           |
| 10  | 39994.22        | 30.81 AV                | 54             | -23.19      | -72.82                  | 8.37                   | -64.45           |

Note: Margin value = Emission Level - Limit value

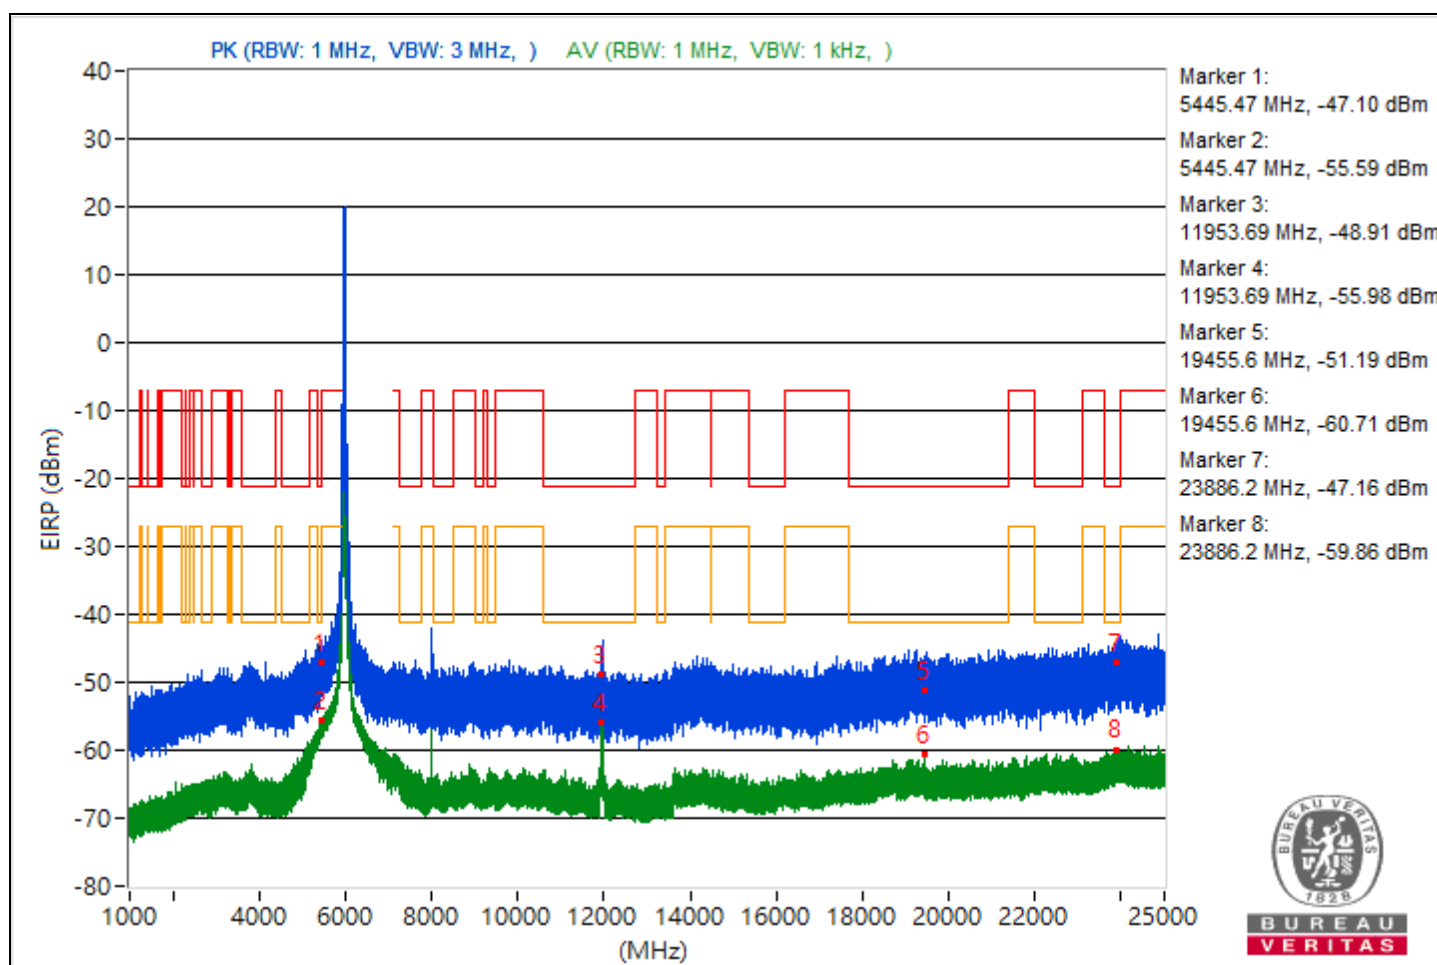

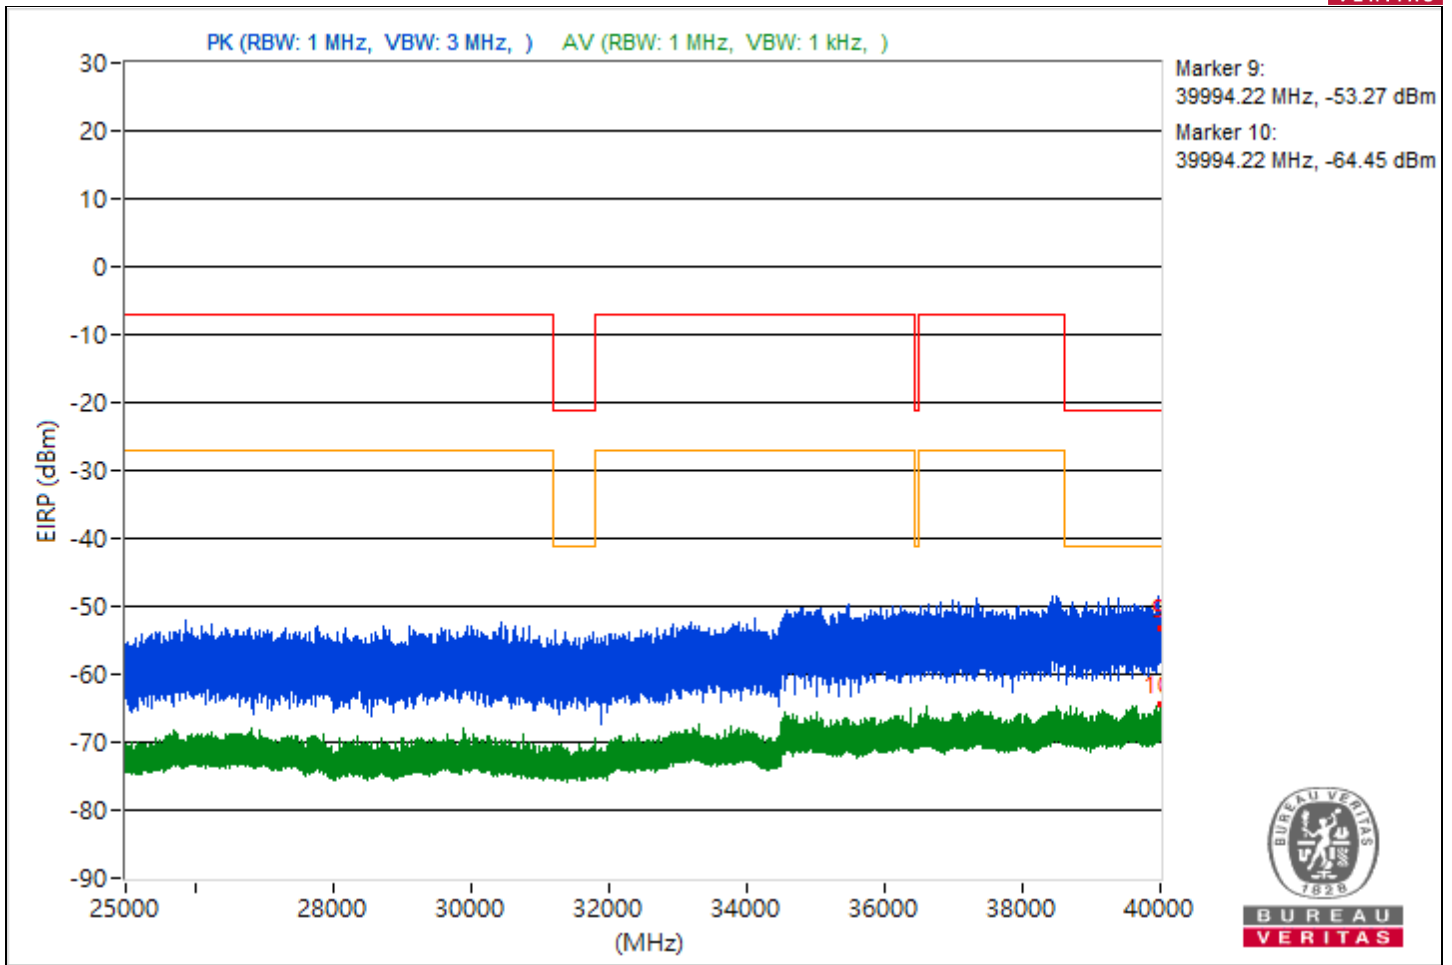



|                 |                                   |                          |                  |
|-----------------|-----------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 87 : 6385 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                       |                          |                  |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5454.64         | 45.97 PK                | 74             | -28.03      | -57.66                  | 8.37                   | -49.29           |
| 2   | 5454.64         | 38.15 AV                | 54             | -15.85      | -65.48                  | 8.37                   | -57.11           |
| 3   | 7266.94         | 43.56 PK                | 74             | -30.44      | -60.07                  | 8.37                   | -51.7            |
| 4   | 7266.94         | 36.08 AV                | 54             | -17.92      | -67.55                  | 8.37                   | -59.18           |
| 5   | 19197.5         | 43.31 PK                | 74             | -30.69      | -60.32                  | 8.37                   | -51.95           |
| 6   | 19197.5         | 34.38 AV                | 54             | -19.62      | -69.25                  | 8.37                   | -60.88           |
| 7   | 23844           | 48.08 PK                | 74             | -25.92      | -55.55                  | 8.37                   | -47.18           |
| 8   | 23844           | 35.42 AV                | 54             | -18.58      | -68.21                  | 8.37                   | -59.84           |
| 9   | 39433.78        | 40.25 PK                | 74             | -33.75      | -63.38                  | 8.37                   | -55.01           |
| 10  | 39433.78        | 30.45 AV                | 54             | -23.55      | -73.18                  | 8.37                   | -64.81           |

Note: Margin value = Emission Level - Limit value

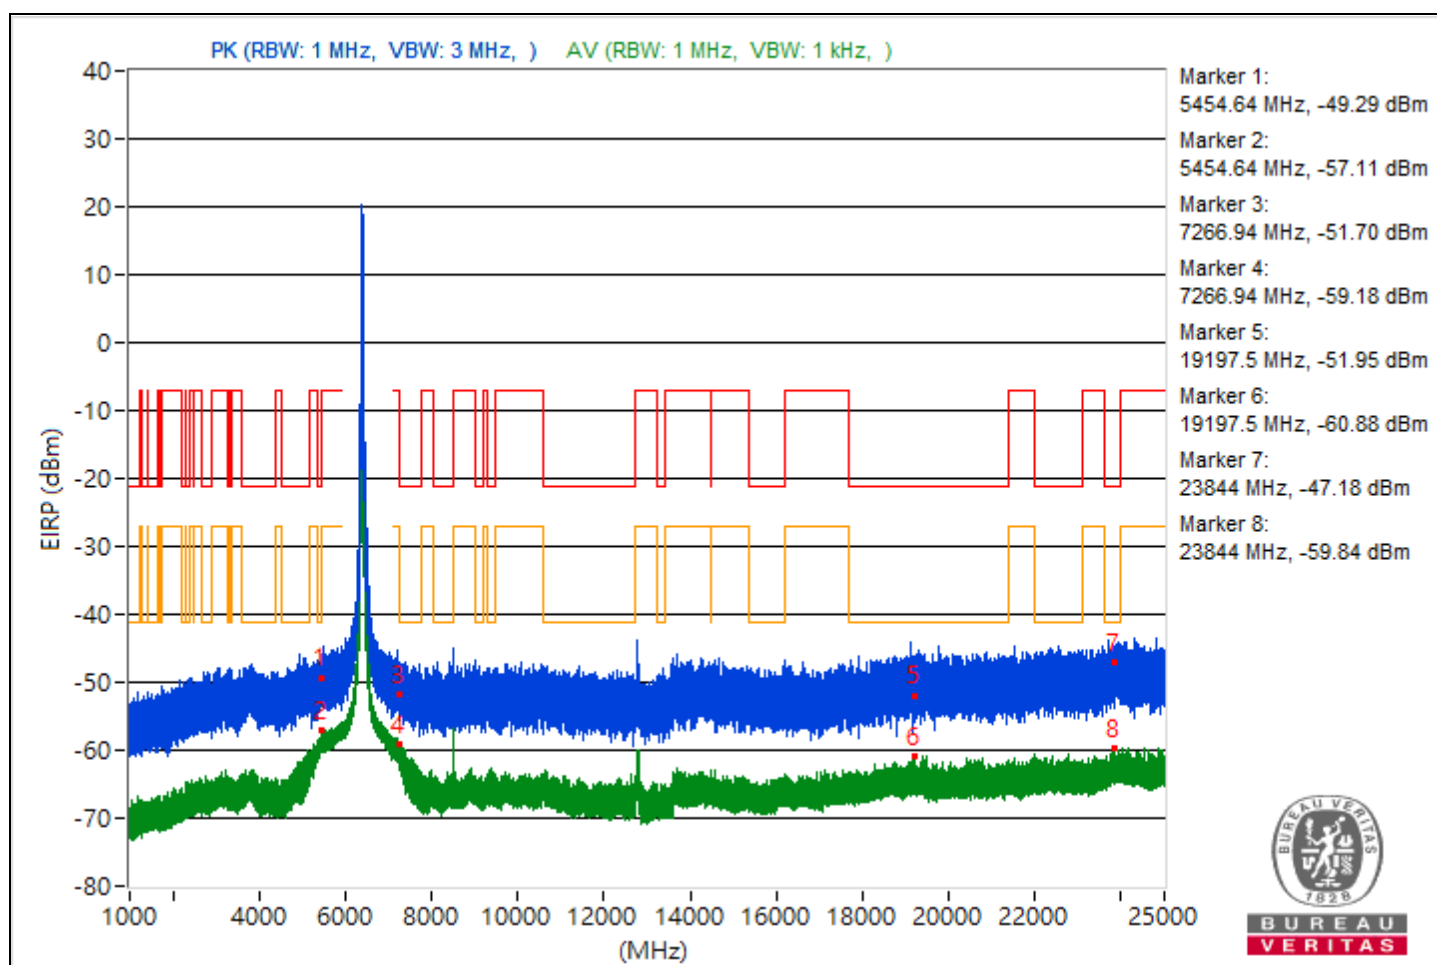


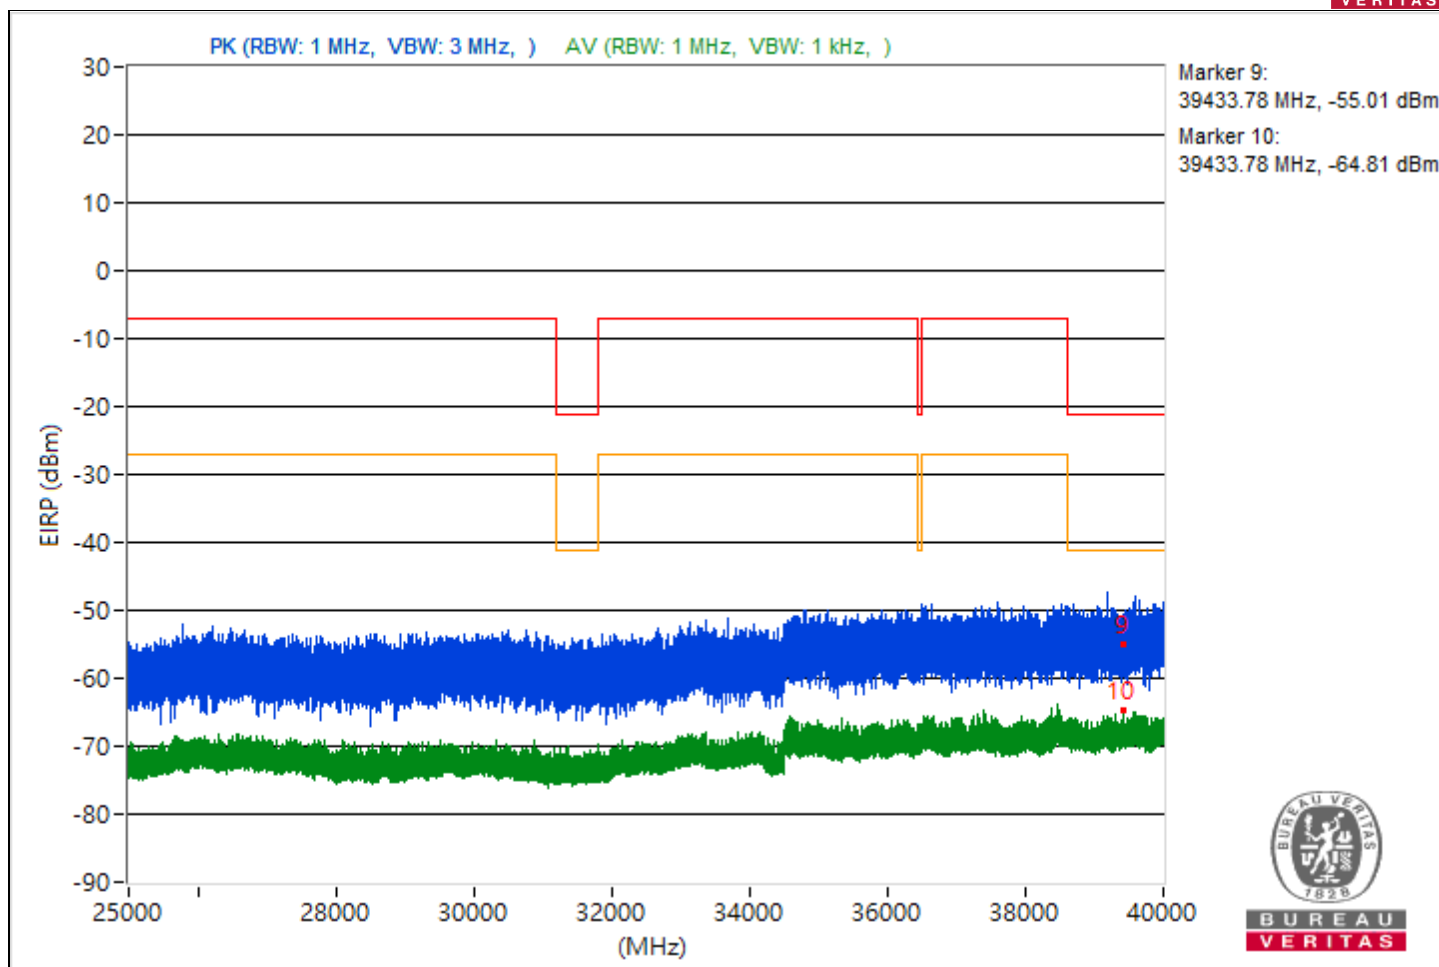


|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 135 : 6625 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                       |                          |                   |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5454.18         | 47.08 PK                | 74             | -26.92      | -56.55                  | 8.37                   | -48.18           |
| 2                            | 5454.18         | 36.38 AV                | 54             | -17.62      | -67.25                  | 8.37                   | -58.88           |
| 3                            | 7263.44         | 46.47 PK                | 74             | -27.53      | -57.16                  | 8.37                   | -48.79           |
| 4                            | 7263.44         | 36.98 AV                | 54             | -17.02      | -66.65                  | 8.37                   | -58.28           |
| 5                            | 20599.8         | 45.11 PK                | 74             | -28.89      | -58.52                  | 8.37                   | -50.15           |
| 6                            | 20599.8         | 34.46 AV                | 54             | -19.54      | -69.17                  | 8.37                   | -60.8            |
| 7                            | 23927.5         | 47.26 PK                | 74             | -26.74      | -56.37                  | 8.37                   | -48              |
| 8                            | 23927.5         | 35.71 AV                | 54             | -18.29      | -67.92                  | 8.37                   | -59.55           |
| 9                            | 39996.36        | 41.04 PK                | 74             | -32.96      | -62.59                  | 8.37                   | -54.22           |
| 10                           | 39996.36        | 30.94 AV                | 54             | -23.06      | -72.69                  | 8.37                   | -64.32           |

Note: Margin value = Emission Level - Limit value

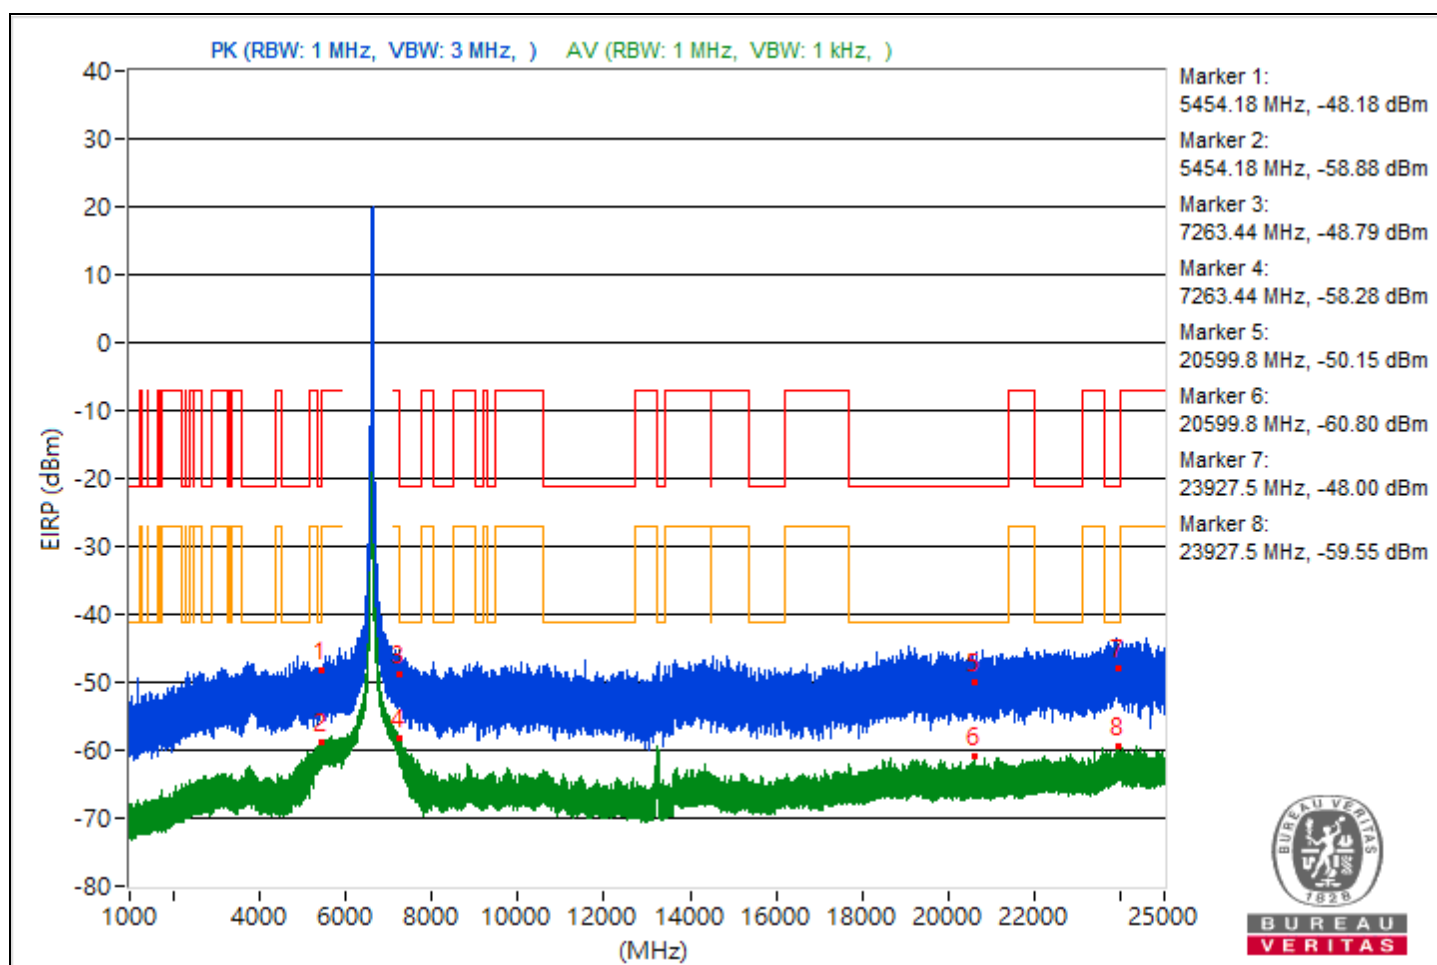

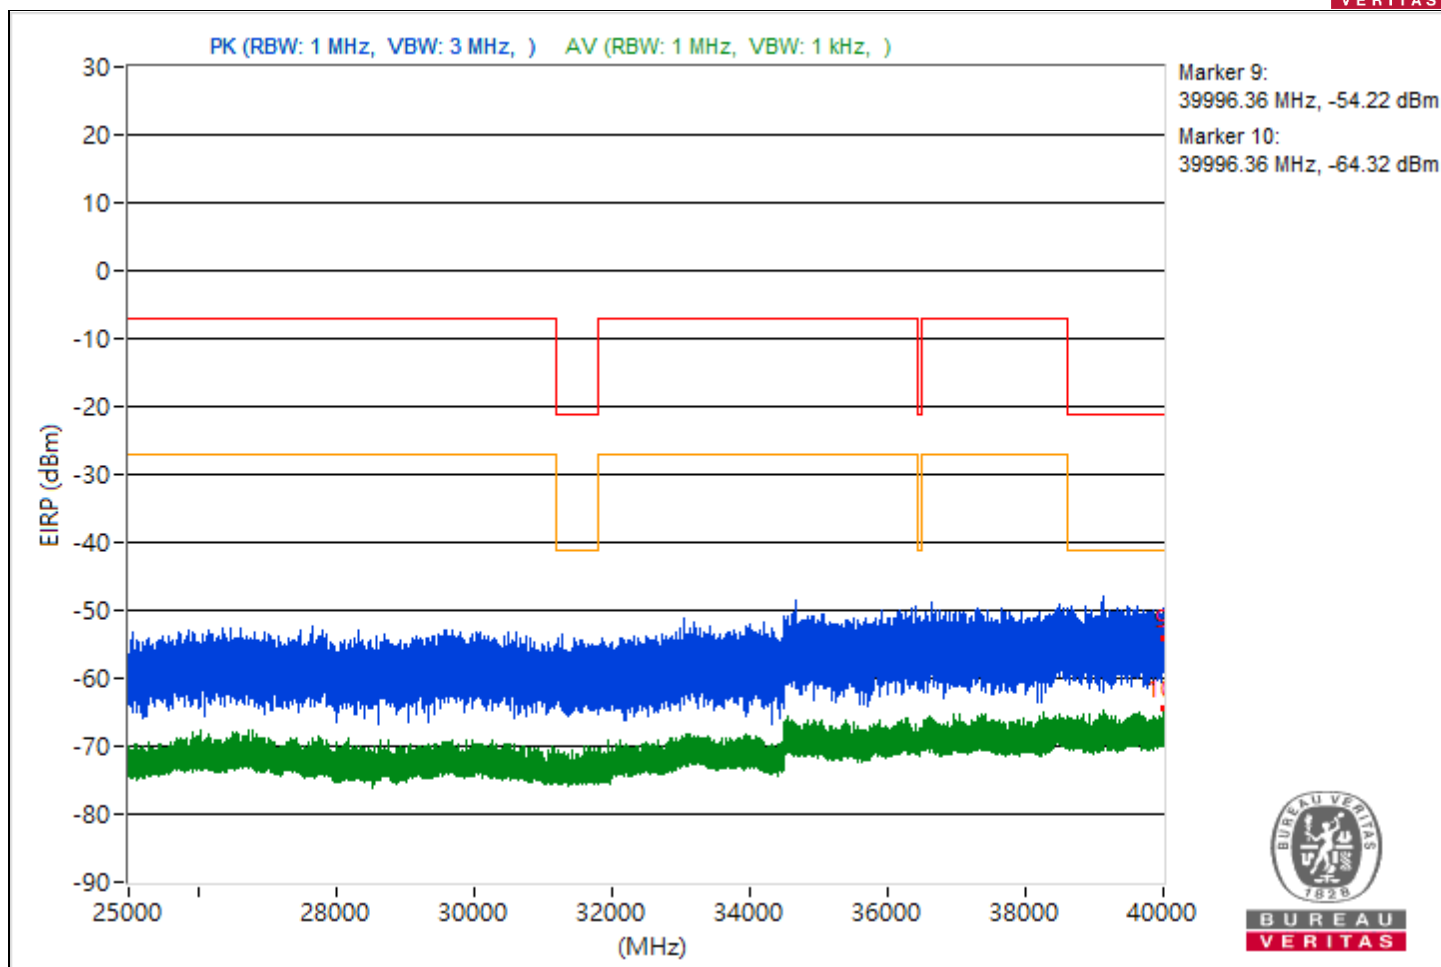



|                 |                                   |                          |                   |
|-----------------|-----------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80) 484+242-tone MRU | Channel                  | CH 167 : 6785 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                    | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                       |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5415.83         | 44.07 PK                | 74             | -29.93      | -59.56                  | 8.37                   | -51.19           |
| 2   | 5415.83         | 35.58 AV                | 54             | -18.42      | -68.05                  | 8.37                   | -59.68           |
| 3   | 7258.78         | 46.3 PK                 | 74             | -27.7       | -57.33                  | 8.37                   | -48.96           |
| 4   | 7258.78         | 38.67 AV                | 54             | -15.33      | -64.96                  | 8.37                   | -56.59           |
| 5   | 20377           | 45.9 PK                 | 74             | -28.1       | -57.73                  | 8.37                   | -49.36           |
| 6   | 20377           | 34.23 AV                | 54             | -19.77      | -69.4                   | 8.37                   | -61.03           |
| 7   | 23904.3         | 47.45 PK                | 74             | -26.55      | -56.18                  | 8.37                   | -47.81           |
| 8   | 23904.3         | 35.15 AV                | 54             | -18.85      | -68.48                  | 8.37                   | -60.11           |
| 9   | 39992.62        | 42.29 PK                | 74             | -31.71      | -61.34                  | 8.37                   | -52.97           |
| 10  | 39992.62        | 31.46 AV                | 54             | -22.54      | -72.17                  | 8.37                   | -63.8            |

Note: Margin value = Emission Level - Limit value

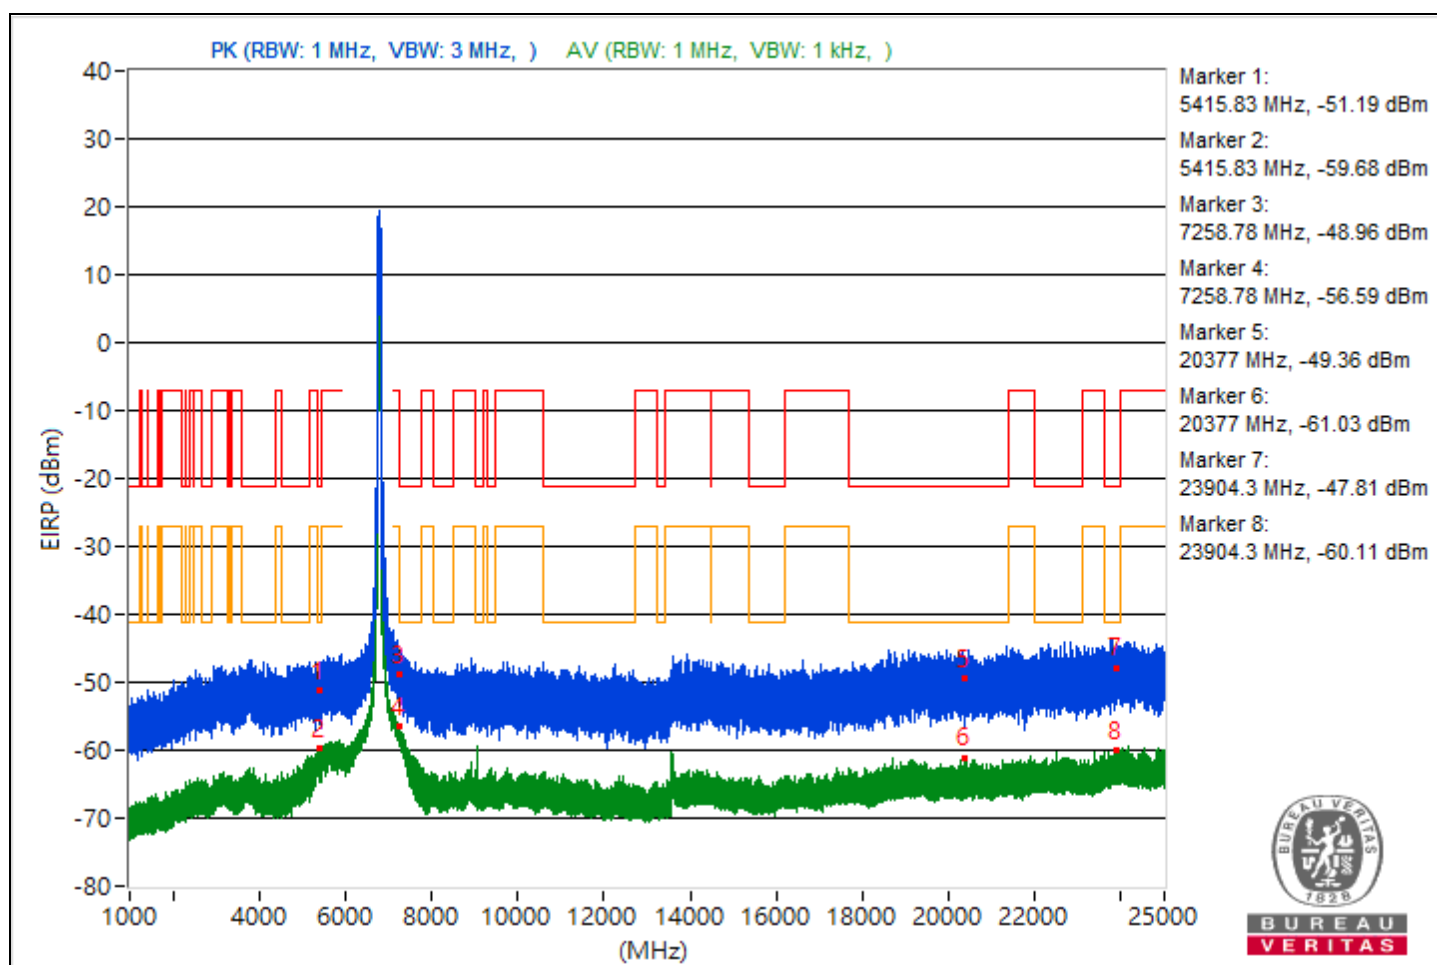

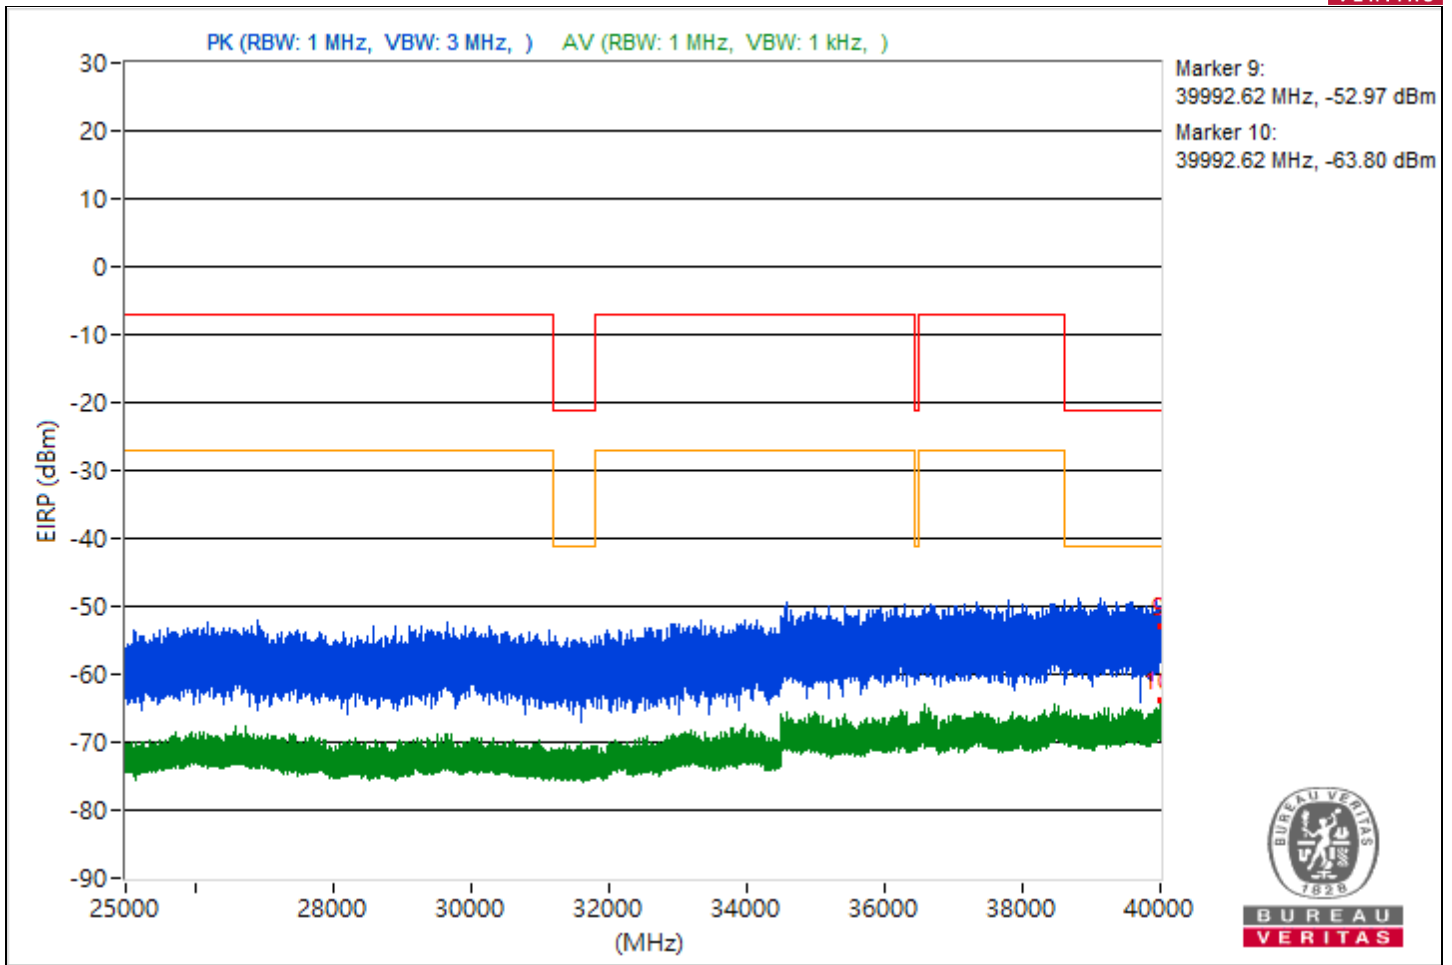



|                 |                                    |                          |                  |
|-----------------|------------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 15 : 6025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                     | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                        |                          |                  |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5454.41         | 47.26 PK                | 74             | -26.74      | -56.37                  | 8.37                   | -48              |
| 2   | 5454.41         | 39.62 AV                | 54             | -14.38      | -64.01                  | 8.37                   | -55.64           |
| 3   | 8033.33         | 52.82 PK                | 74             | -21.18      | -50.81                  | 8.37                   | -42.44           |
| 4   | 8033.33         | 51.08 AV                | 54             | -2.92       | -52.55                  | 8.37                   | -44.18           |
| 5   | 21243.3         | 44.78 PK                | 74             | -29.22      | -58.85                  | 8.37                   | -50.48           |
| 6   | 21243.3         | 34.3 AV                 | 54             | -19.7       | -69.33                  | 8.37                   | -60.96           |
| 7   | 23981.5         | 44.07 PK                | 74             | -29.93      | -59.56                  | 8.37                   | -51.19           |
| 8   | 23981.5         | 35.71 AV                | 54             | -18.29      | -67.92                  | 8.37                   | -59.55           |
| 9   | 39138.13        | 38.74 PK                | 74             | -35.26      | -64.89                  | 8.37                   | -56.52           |
| 10  | 39138.13        | 30.98 AV                | 54             | -23.02      | -72.65                  | 8.37                   | -64.28           |

Note: Margin value = Emission Level - Limit value

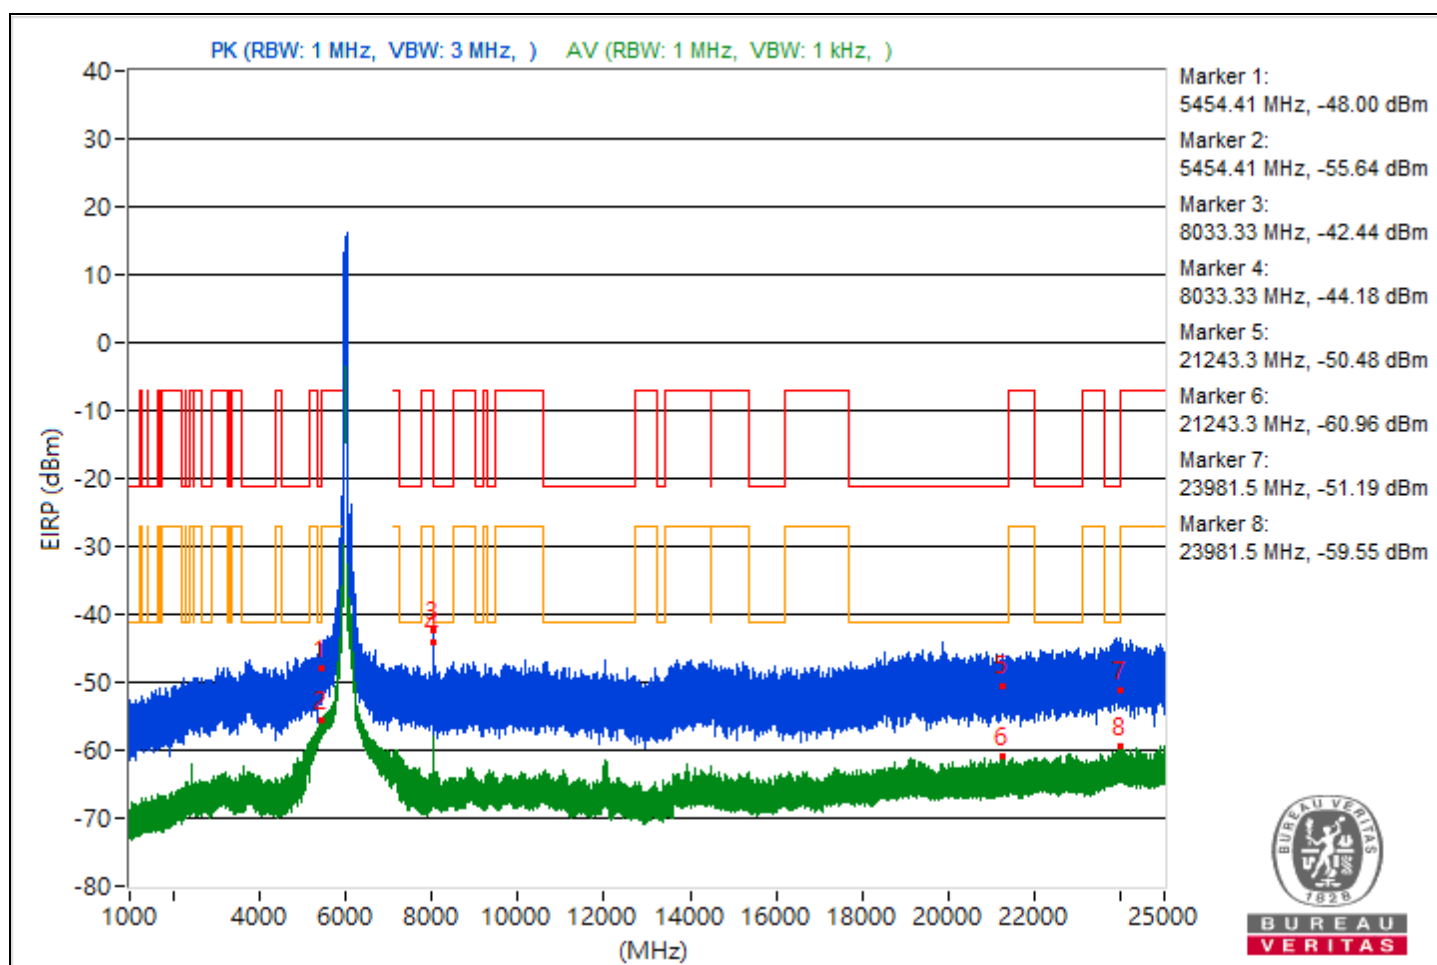


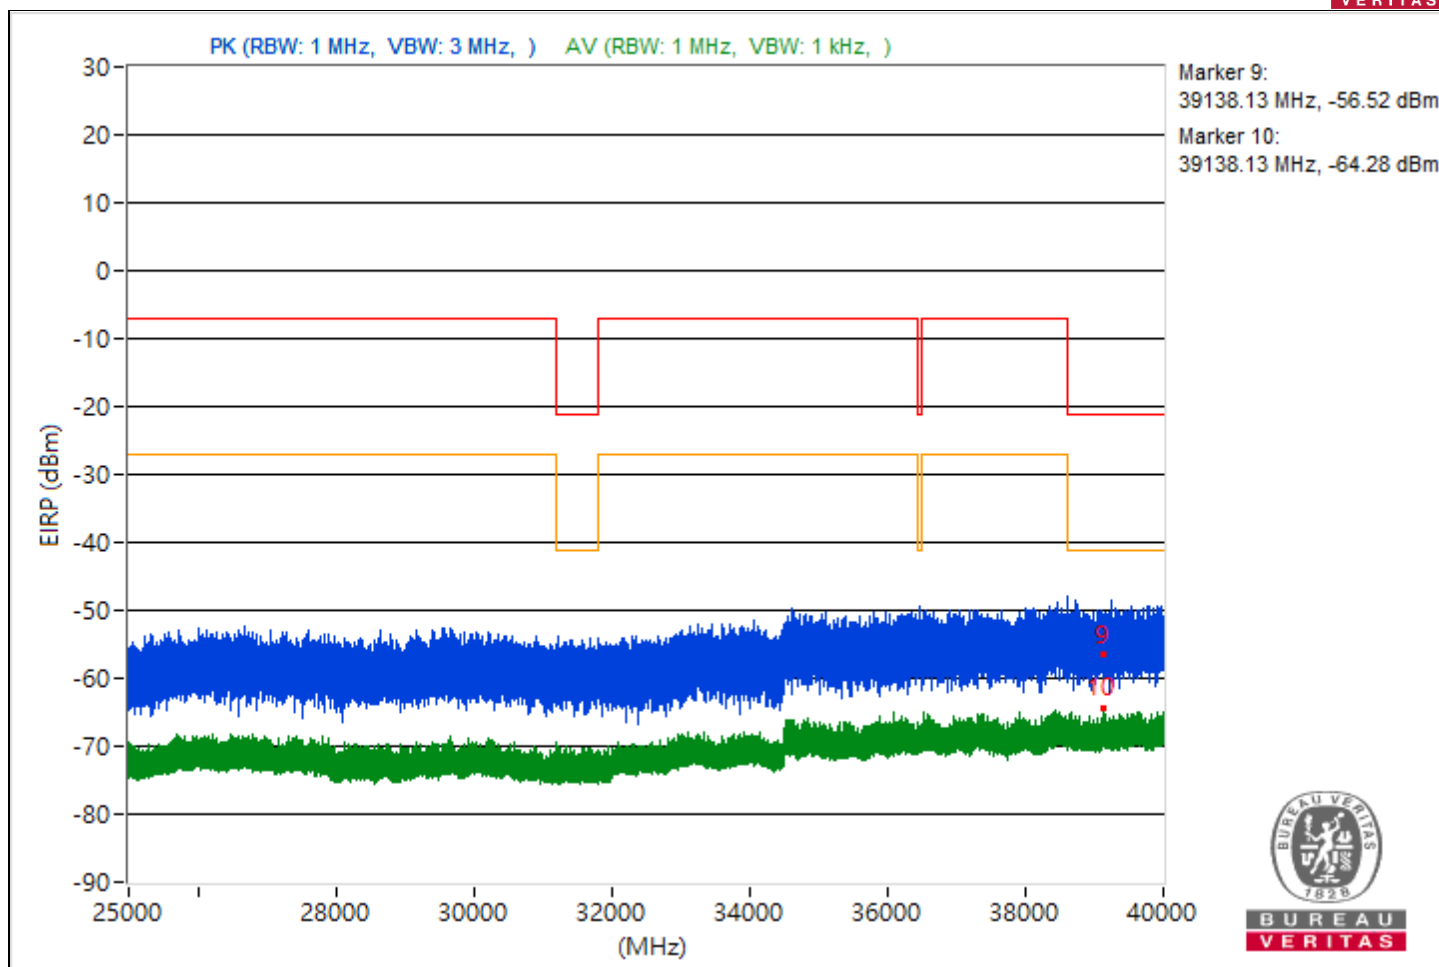


|                 |                                    |                          |                  |
|-----------------|------------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 79 : 6345 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                     | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                        |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459.54         | 44.71 PK                | 74             | -29.29      | -58.92                  | 8.37                   | -50.55           |
| 2                            | 5459.54         | 37.92 AV                | 54             | -16.08      | -65.71                  | 8.37                   | -57.34           |
| 3                            | 8460            | 47.42 PK                | 74             | -26.58      | -56.21                  | 8.37                   | -47.84           |
| 4                            | 8460            | 45.06 AV                | 54             | -8.94       | -58.57                  | 8.37                   | -50.2            |
| 5                            | 19128.1         | 45.31 PK                | 74             | -28.69      | -58.32                  | 8.37                   | -49.95           |
| 6                            | 19128.1         | 33.99 AV                | 54             | -20.01      | -69.64                  | 8.37                   | -61.27           |
| 7                            | 23932.8         | 51.98 PK                | 74             | -22.02      | -51.65                  | 8.37                   | -43.28           |
| 8                            | 23932.8         | 35.63 AV                | 54             | -18.37      | -68                     | 8.37                   | -59.63           |
| 9                            | 39387.02        | 40.61 PK                | 74             | -33.39      | -63.02                  | 8.37                   | -54.65           |
| 10                           | 39387.02        | 30.4 AV                 | 54             | -23.6       | -73.23                  | 8.37                   | -64.86           |

Note: Margin value = Emission Level - Limit value

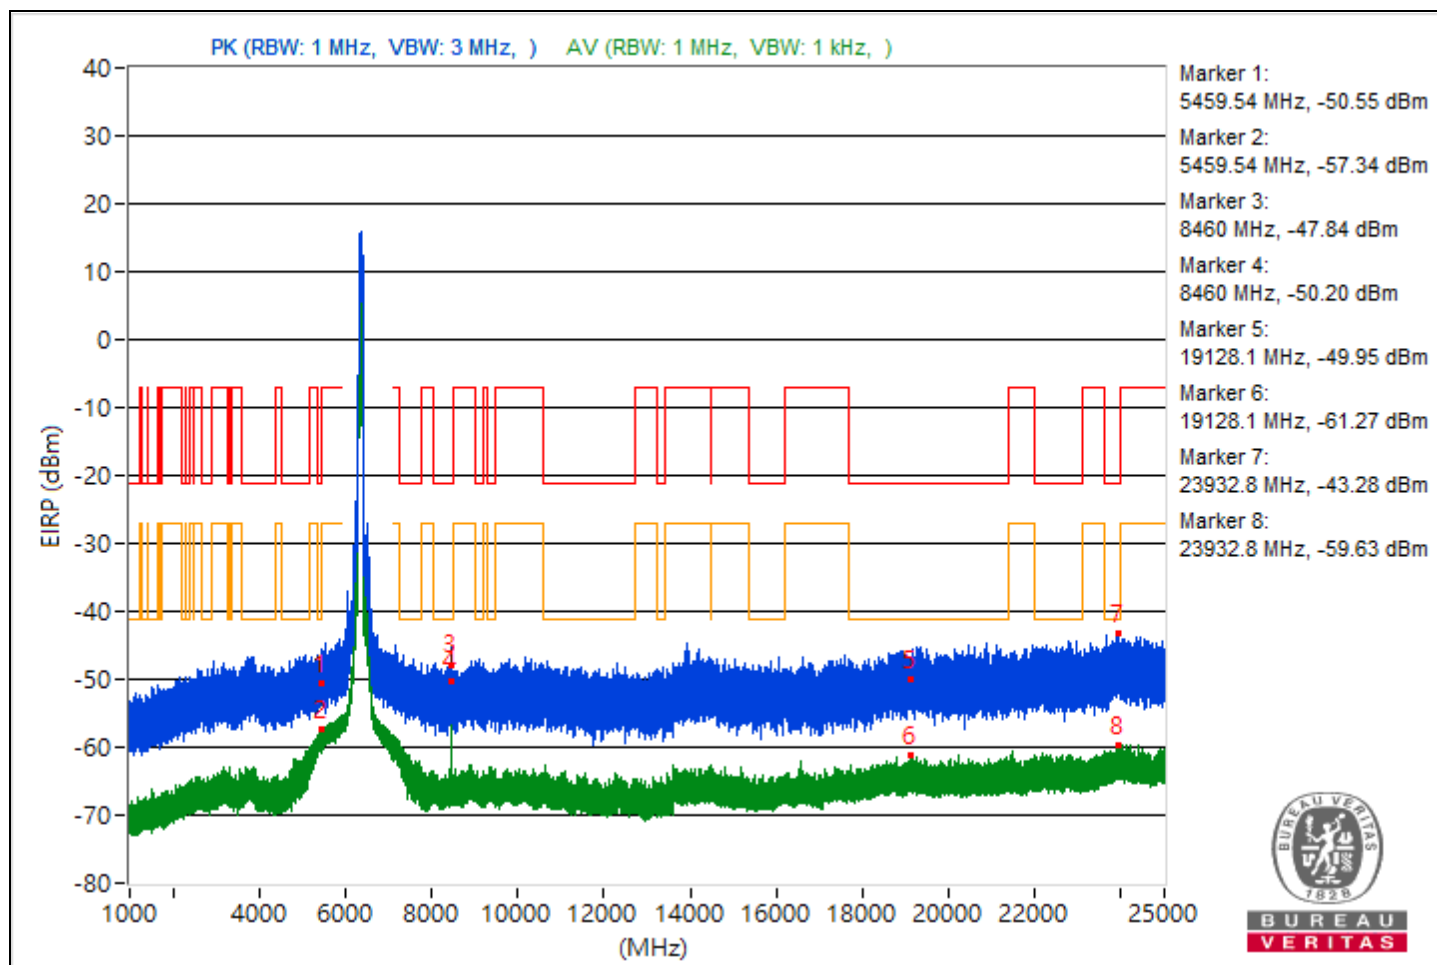

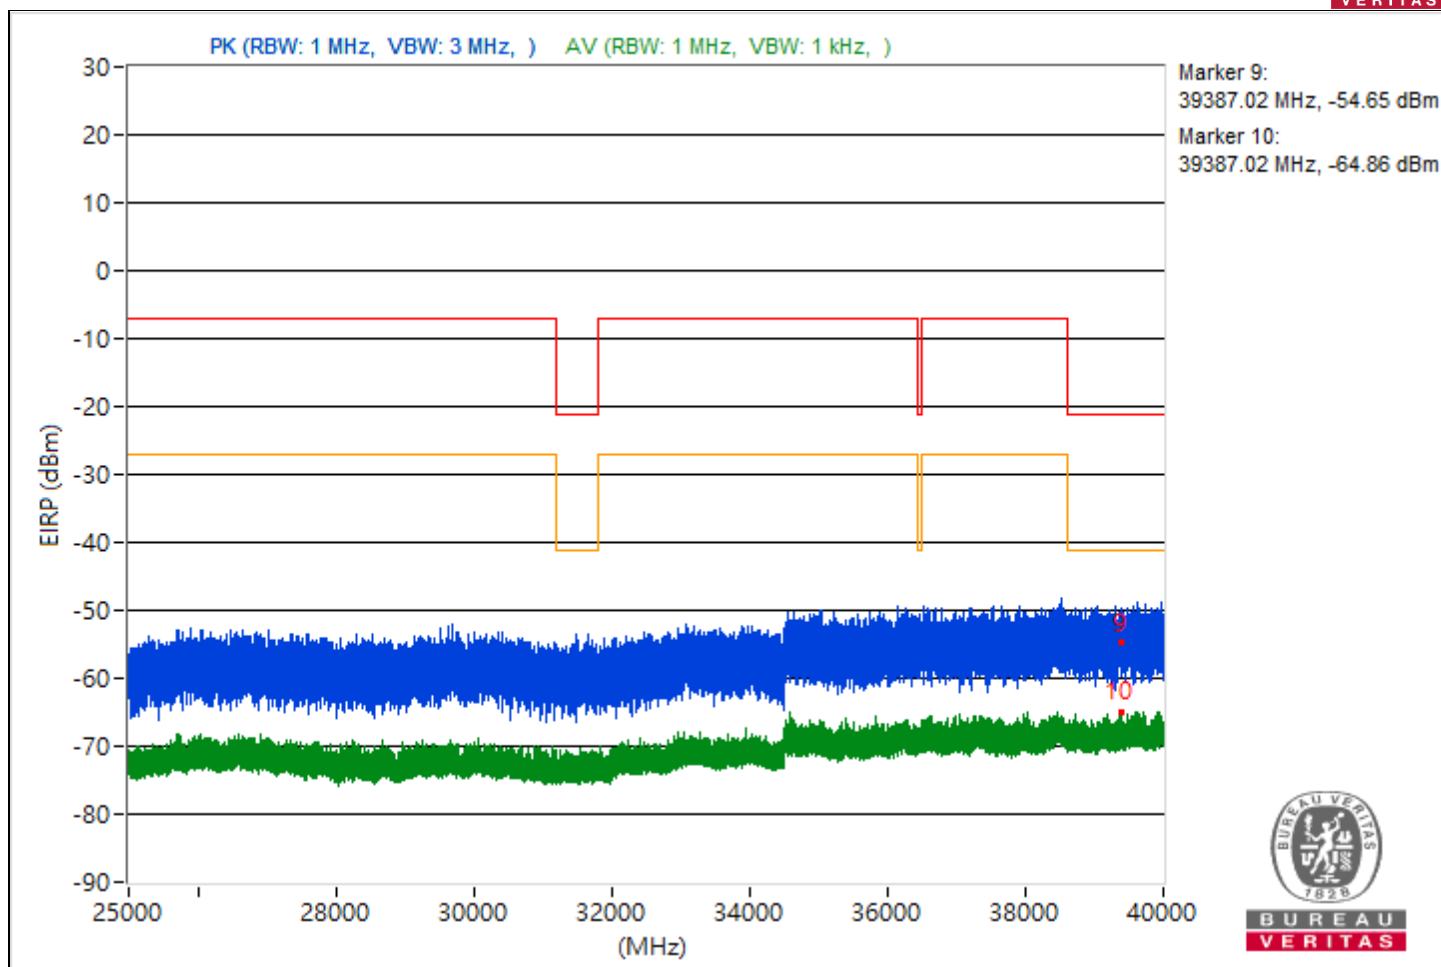


|                 |                                    |                          |                   |
|-----------------|------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484-tone MRU | Channel                  | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                     | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                        |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5449.51         | 44.81 PK                | 74             | -29.19      | -58.82                  | 8.37                   | -50.45           |
| 2   | 5449.51         | 36.22 AV                | 54             | -17.78      | -67.41                  | 8.37                   | -59.04           |
| 3   | 7263.06         | 45.14 PK                | 74             | -28.86      | -58.49                  | 8.37                   | -50.12           |
| 4   | 7263.06         | 37.09 AV                | 54             | -16.91      | -66.54                  | 8.37                   | -58.17           |
| 5   | 19159.4         | 42.57 PK                | 74             | -31.43      | -61.06                  | 8.37                   | -52.69           |
| 6   | 19159.4         | 34.25 AV                | 54             | -19.75      | -69.38                  | 8.37                   | -61.01           |
| 7   | 23801.3         | 47.27 PK                | 74             | -26.73      | -56.36                  | 8.37                   | -47.99           |
| 8   | 23801.3         | 35.95 AV                | 54             | -18.05      | -67.68                  | 8.37                   | -59.31           |
| 9   | 39182.58        | 39.4 PK                 | 74             | -34.6       | -64.23                  | 8.37                   | -55.86           |
| 10  | 39182.58        | 30.4 AV                 | 54             | -23.6       | -73.23                  | 8.37                   | -64.86           |

Note: Margin value = Emission Level - Limit value

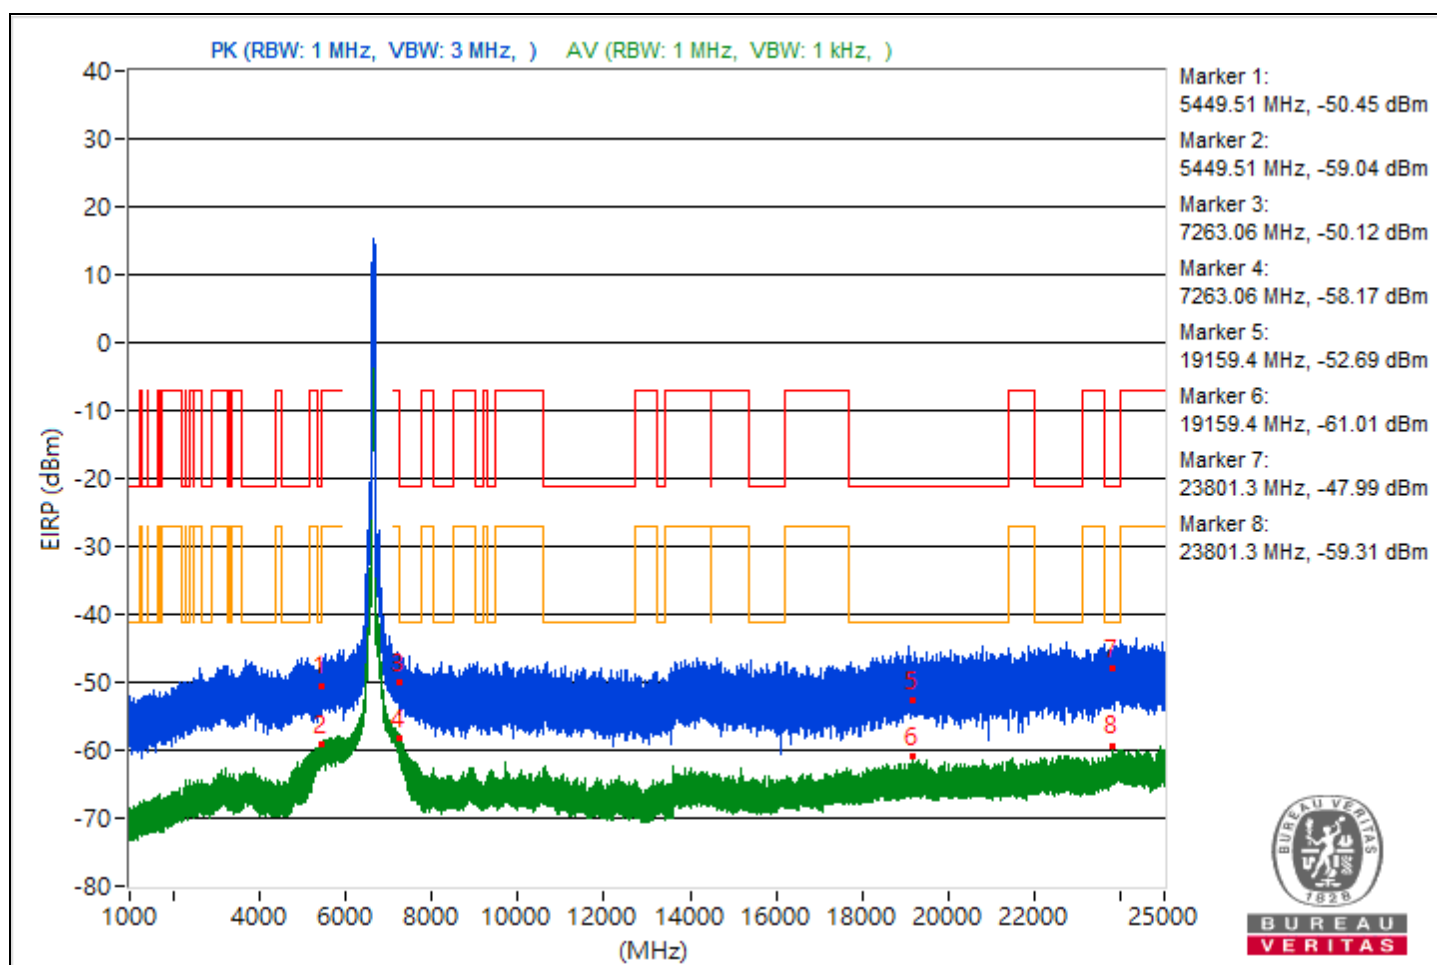





|                 |                                        |                          |                  |
|-----------------|----------------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 15 : 6025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                         | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                            |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | #5873.63        | 61.76 PK                | 88.26          | -26.5       | -41.87                  | 8.37                   | -33.5            |
| 2                            | #5873.63        | 54.11 AV                | 68.26          | -14.15      | -49.52                  | 8.37                   | -41.15           |
| 3                            | 8033.33         | 52.87 PK                | 74             | -21.13      | -50.76                  | 8.37                   | -42.39           |
| 4                            | 8033.33         | 51.32 AV                | 54             | -2.68       | -52.31                  | 8.37                   | -43.94           |
| 5                            | 19261.2         | 45.69 PK                | 74             | -28.31      | -57.94                  | 8.37                   | -49.57           |
| 6                            | 19261.2         | 34.56 AV                | 54             | -19.44      | -69.07                  | 8.37                   | -60.7            |
| 7                            | 23925.4         | 47.42 PK                | 74             | -26.58      | -56.21                  | 8.37                   | -47.84           |
| 8                            | 23925.4         | 36.18 AV                | 54             | -17.82      | -67.45                  | 8.37                   | -59.08           |
| 9                            | 39136.36        | 40.57 PK                | 74             | -33.43      | -63.06                  | 8.37                   | -54.69           |
| 10                           | 39136.36        | 30.67 AV                | 54             | -23.33      | -72.96                  | 8.37                   | -64.59           |

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

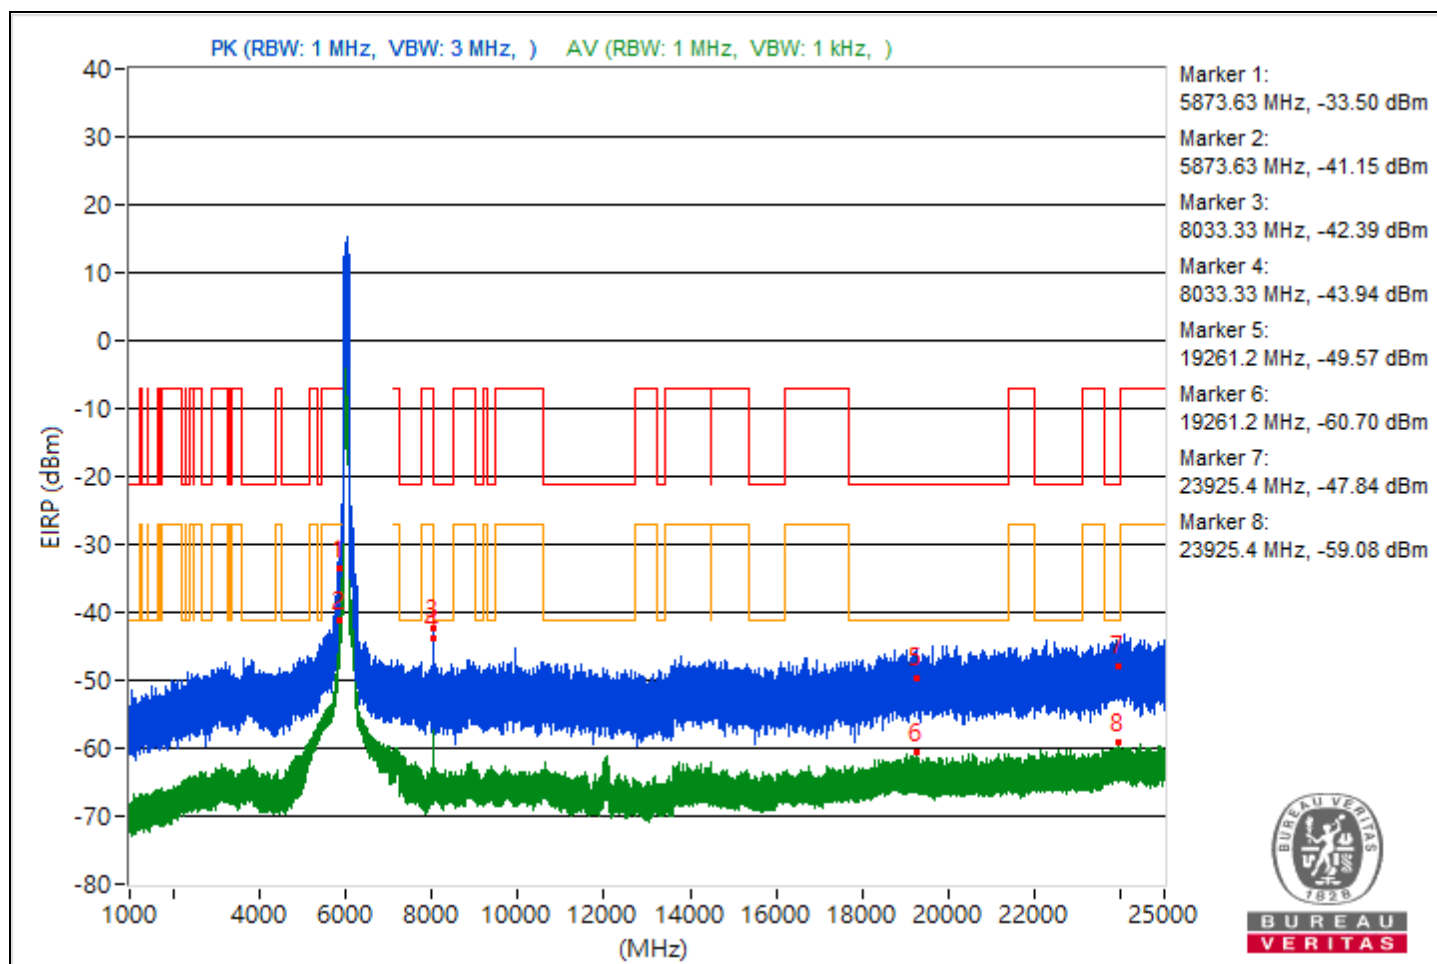


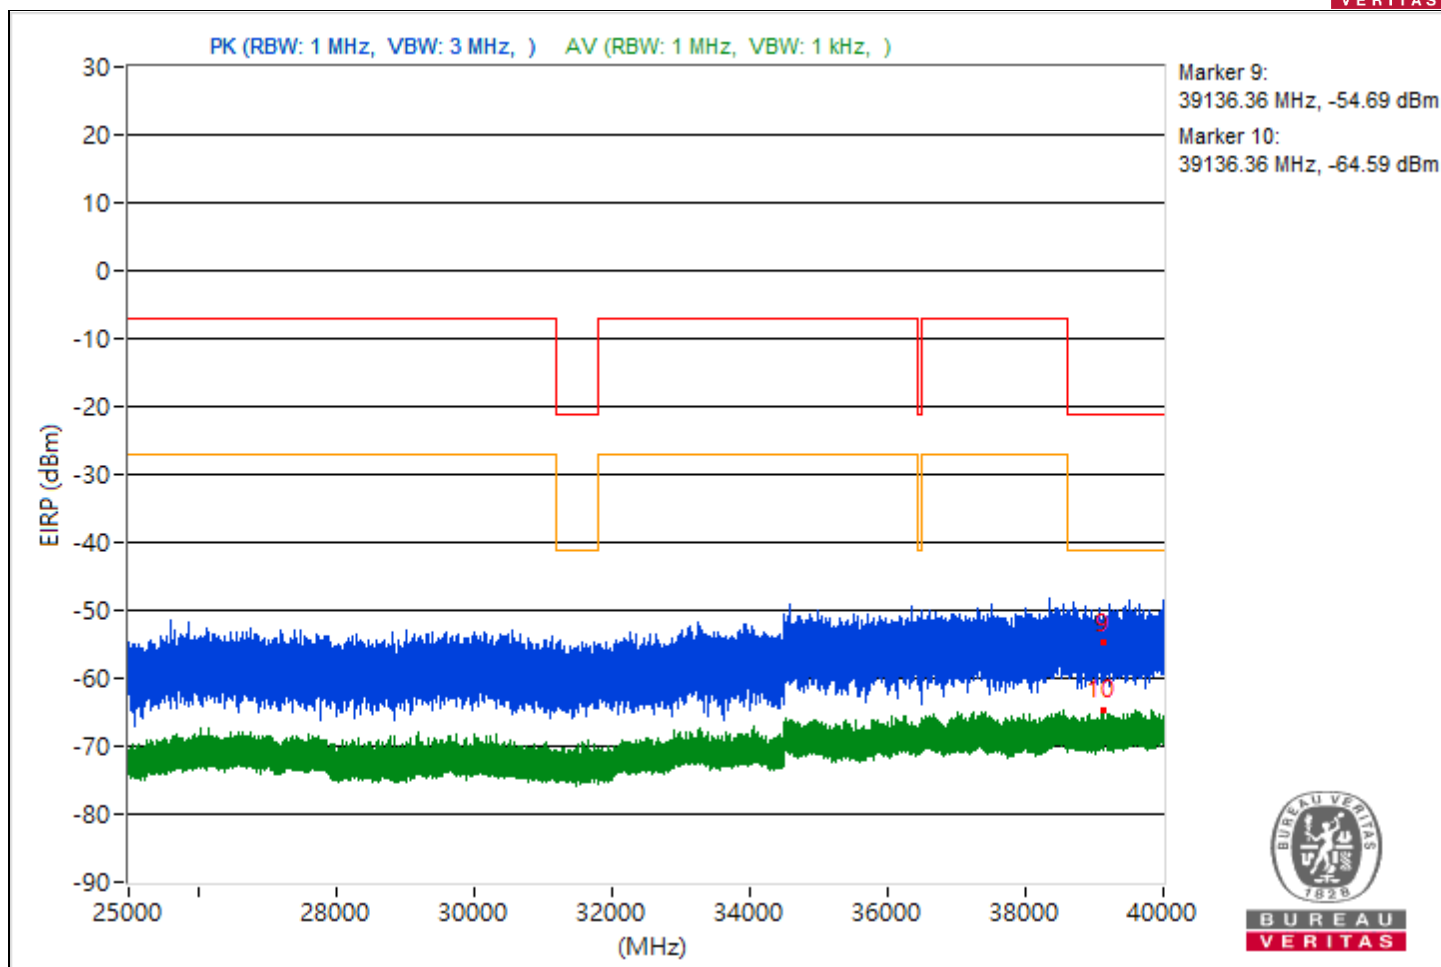


|                 |                                        |                          |                  |
|-----------------|----------------------------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 79 : 6345 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                         | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung                            |                          |                  |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5447.57         | 44.47 PK                | 74             | -29.53      | -59.16                  | 8.37                   | -50.79           |
| 2                            | 5447.57         | 37.56 AV                | 54             | -16.44      | -66.07                  | 8.37                   | -57.7            |
| 3                            | 8460            | 48.89 PK                | 74             | -25.11      | -54.74                  | 8.37                   | -46.37           |
| 4                            | 8460            | 45.57 AV                | 54             | -8.43       | -58.06                  | 8.37                   | -49.69           |
| 5                            | 19880.3         | 44.95 PK                | 74             | -29.05      | -58.68                  | 8.37                   | -50.31           |
| 6                            | 19880.3         | 34.38 AV                | 54             | -19.62      | -69.25                  | 8.37                   | -60.88           |
| 7                            | 23931.2         | 48.45 PK                | 74             | -25.55      | -55.18                  | 8.37                   | -46.81           |
| 8                            | 23931.2         | 35.79 AV                | 54             | -18.21      | -67.84                  | 8.37                   | -59.47           |
| 9                            | 39994.76        | 41.58 PK                | 74             | -32.42      | -62.05                  | 8.37                   | -53.68           |
| 10                           | 39994.76        | 30.7 AV                 | 54             | -23.3       | -72.93                  | 8.37                   | -64.56           |

Note: Margin value = Emission Level - Limit value

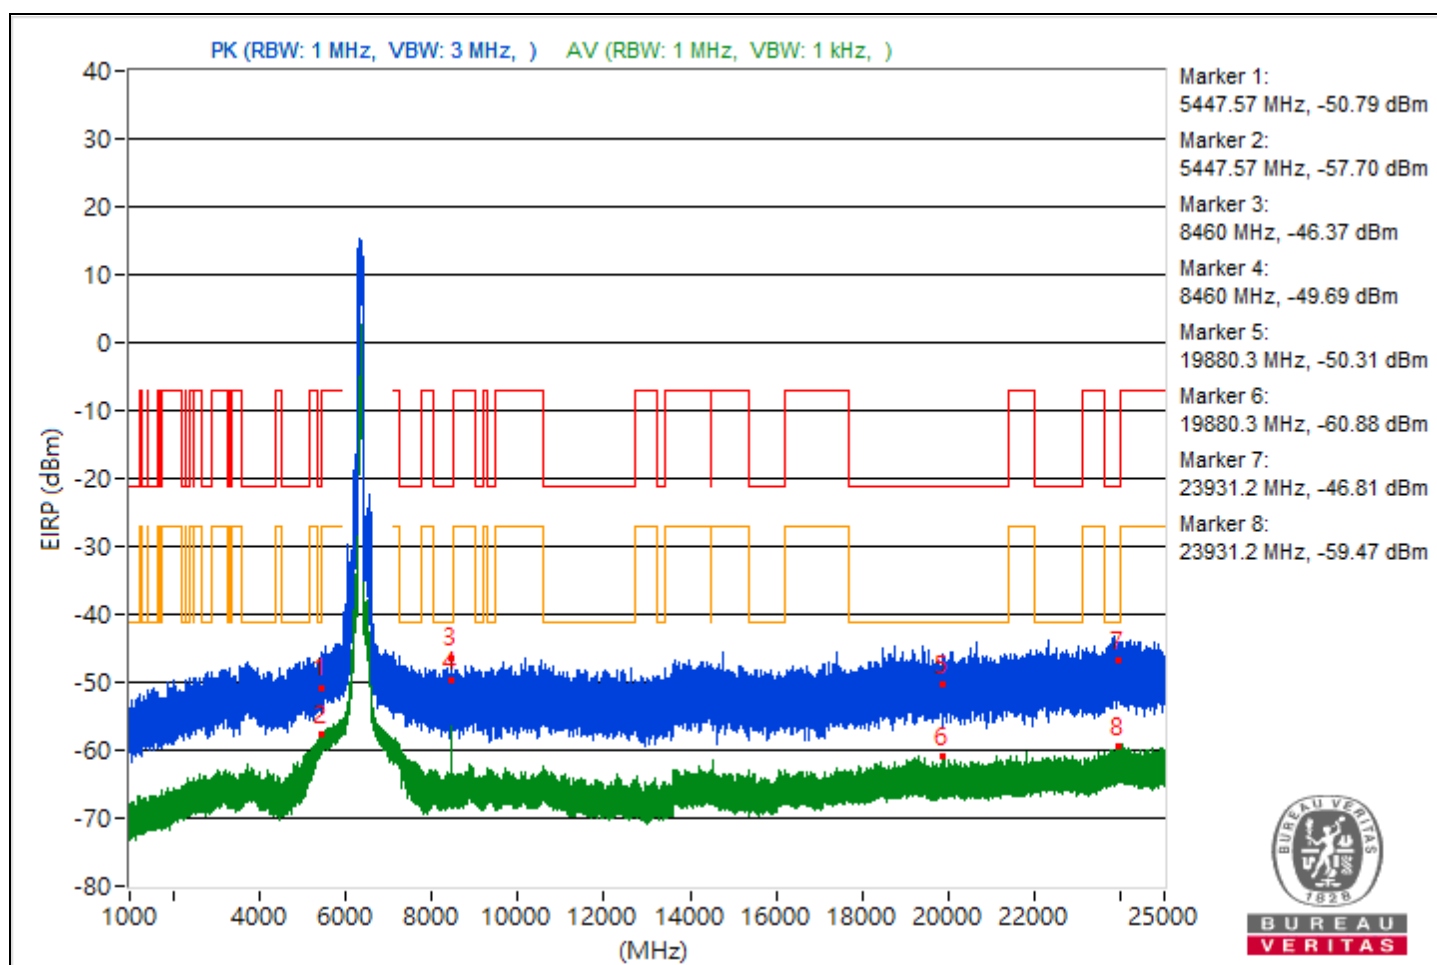

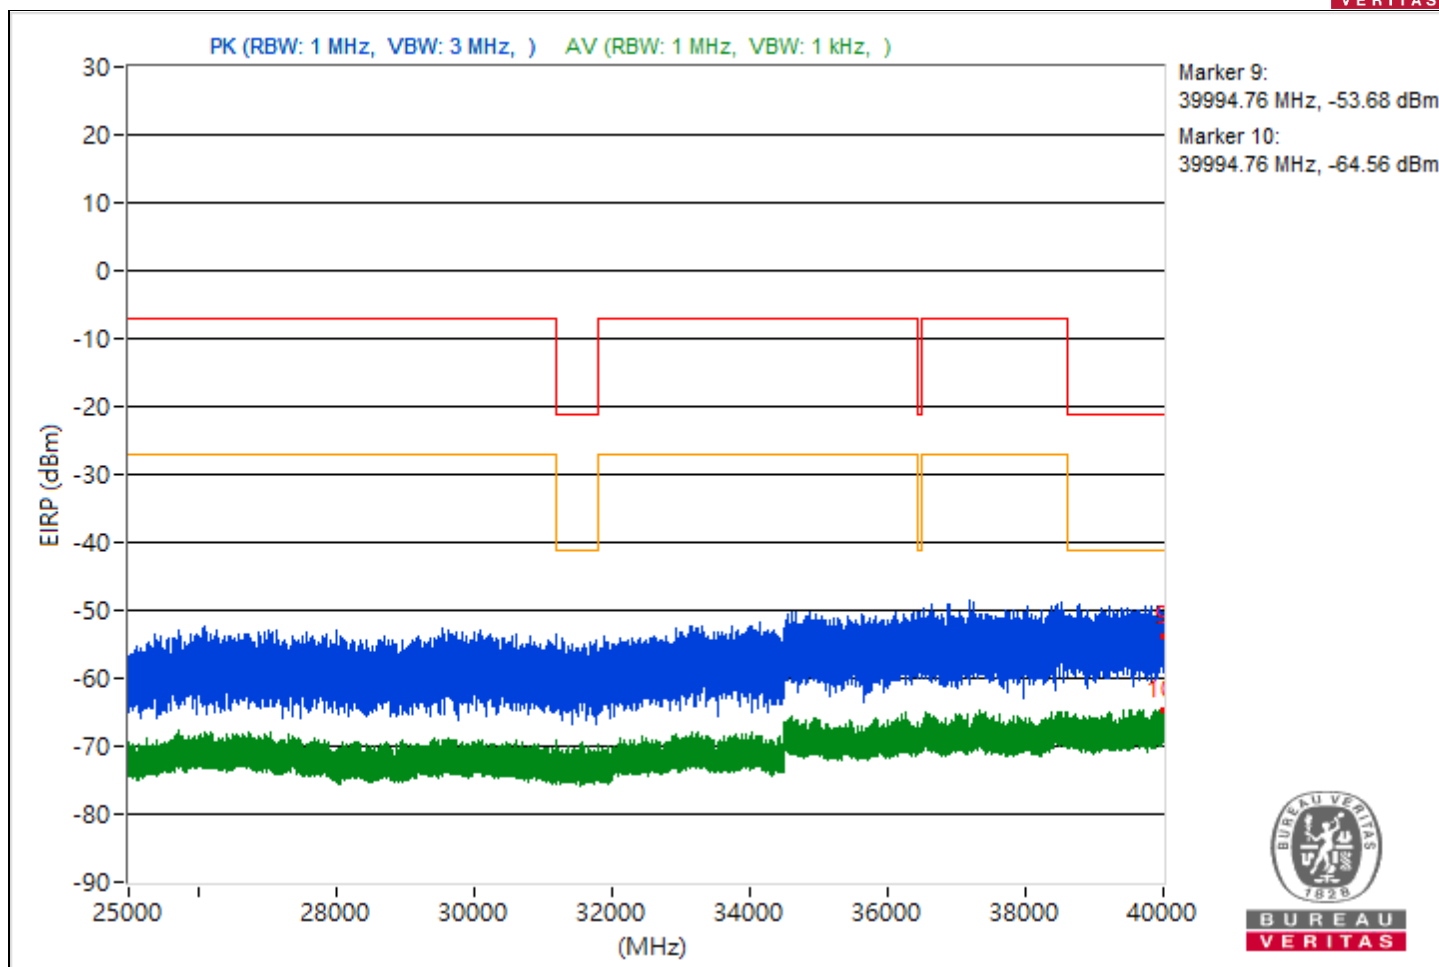



|                 |                                        |                          |                   |
|-----------------|----------------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160) 996+484+242-tone MRU | Channel                  | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz                         | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                            |                          |                   |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| 1   | 5449.28         | 44.75 PK                | 74             | -29.25      | -58.88                  | 8.37                   | -50.51           |
| 2   | 5449.28         | 36.51 AV                | 54             | -17.49      | -67.12                  | 8.37                   | -58.75           |
| 3   | 7286.86         | 45.6 PK                 | 74             | -28.4       | -58.03                  | 8.37                   | -49.66           |
| 4   | 7286.86         | 37.2 AV                 | 54             | -16.8       | -66.43                  | 8.37                   | -58.06           |
| 5   | 21374.4         | 46.96 PK                | 74             | -27.04      | -56.67                  | 8.37                   | -48.3            |
| 6   | 21374.4         | 34.57 AV                | 54             | -19.43      | -69.06                  | 8.37                   | -60.69           |
| 7   | 23655.5         | 45.03 PK                | 74             | -28.97      | -58.6                   | 8.37                   | -50.23           |
| 8   | 23655.5         | 35.91 AV                | 54             | -18.09      | -67.72                  | 8.37                   | -59.35           |
| 9   | 39618.84        | 42.06 PK                | 74             | -31.94      | -61.57                  | 8.37                   | -53.2            |
| 10  | 39618.84        | 31.07 AV                | 54             | -22.93      | -72.56                  | 8.37                   | -64.19           |

Note: Margin value = Emission Level - Limit value

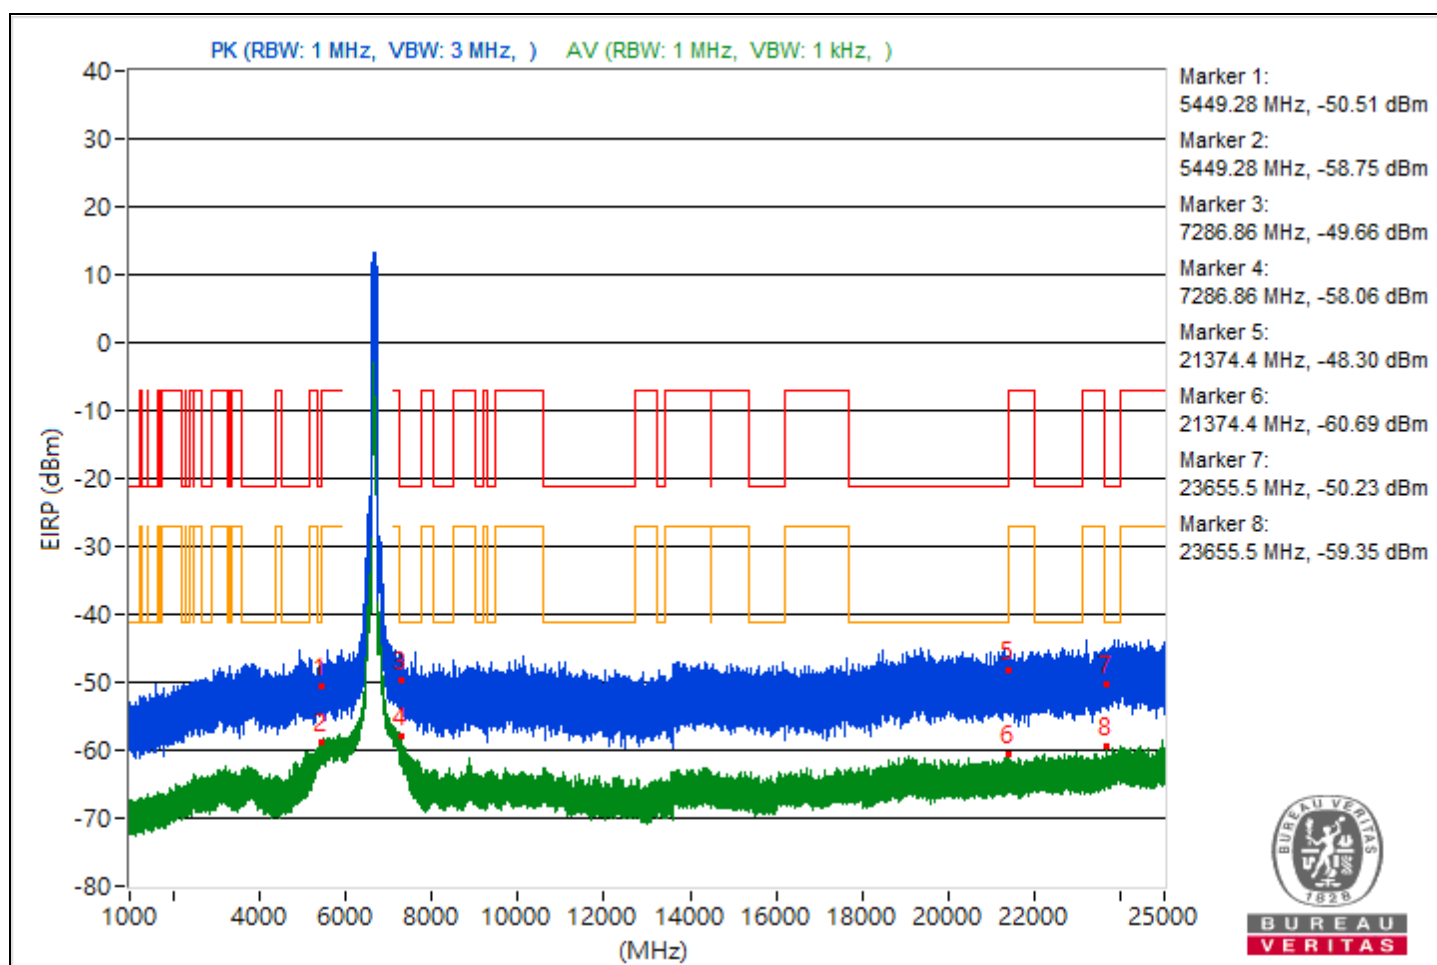

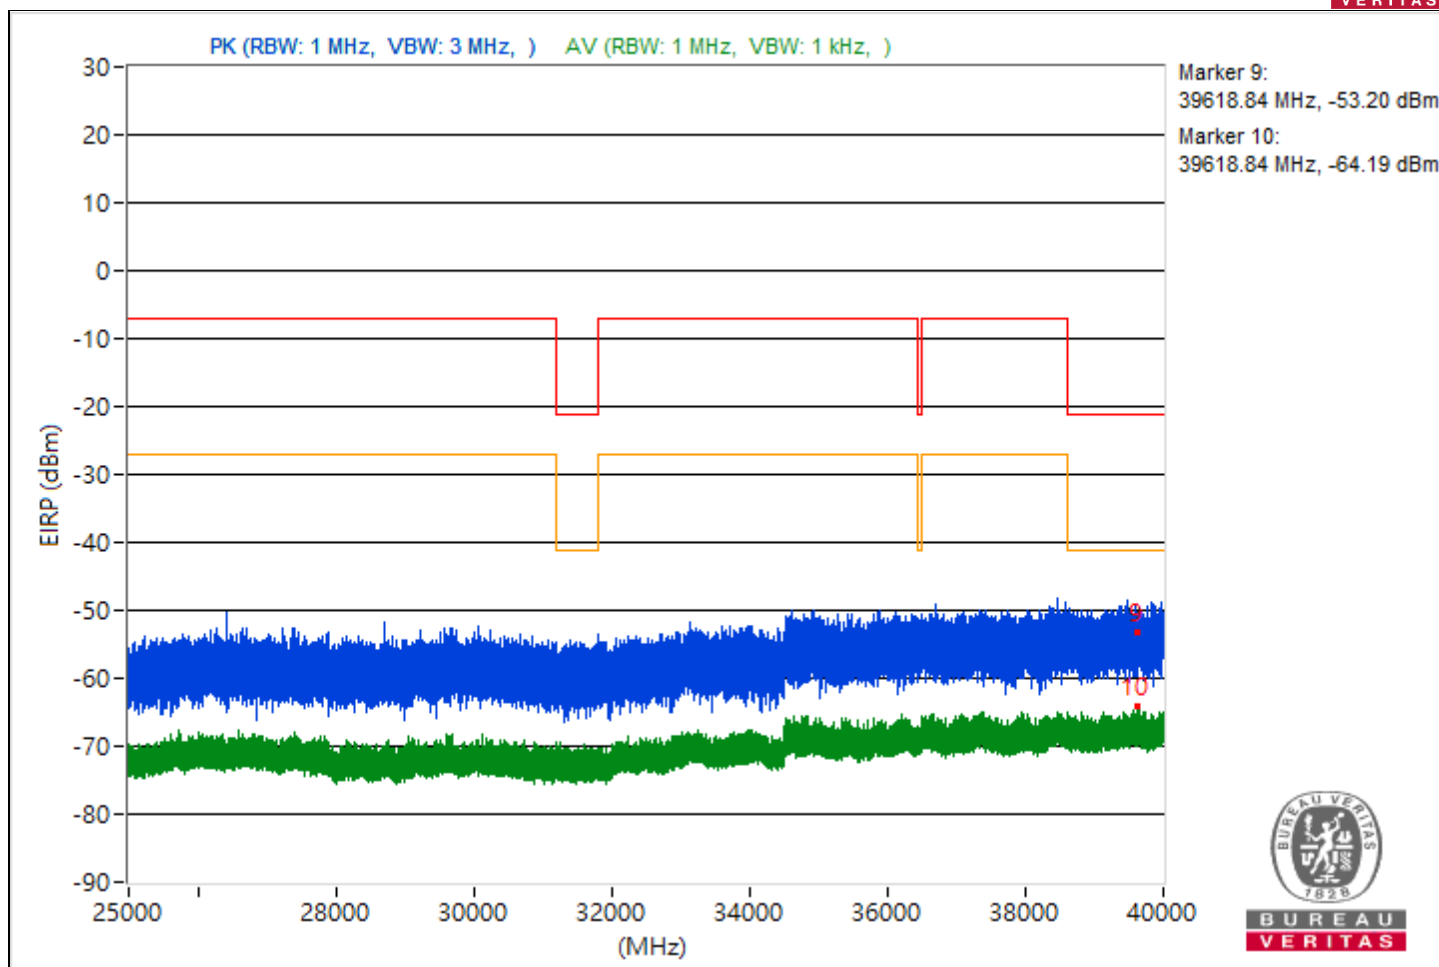

## Conducted Band Edges


### 1TX

|                 |                       |                          |                 |
|-----------------|-----------------------|--------------------------|-----------------|
| RF Mode         | 802.11a               | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung           |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5955.85        | 119.84 PK               |                |             | 16.21                   | 8.37                   | 24.58            |
| 2                   | *5955.85        | 111.89 AV               |                |             | 8.26                    | 8.37                   | 16.63            |
| 3                   | #5924.73        | 69.85 PK                | 88.26          | -18.41      | -33.78                  | 8.37                   | -25.41           |
| 4                   | #5924.73        | 60.84 AV                | 68.26          | -7.42       | -42.79                  | 8.37                   | -34.42           |

#### Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

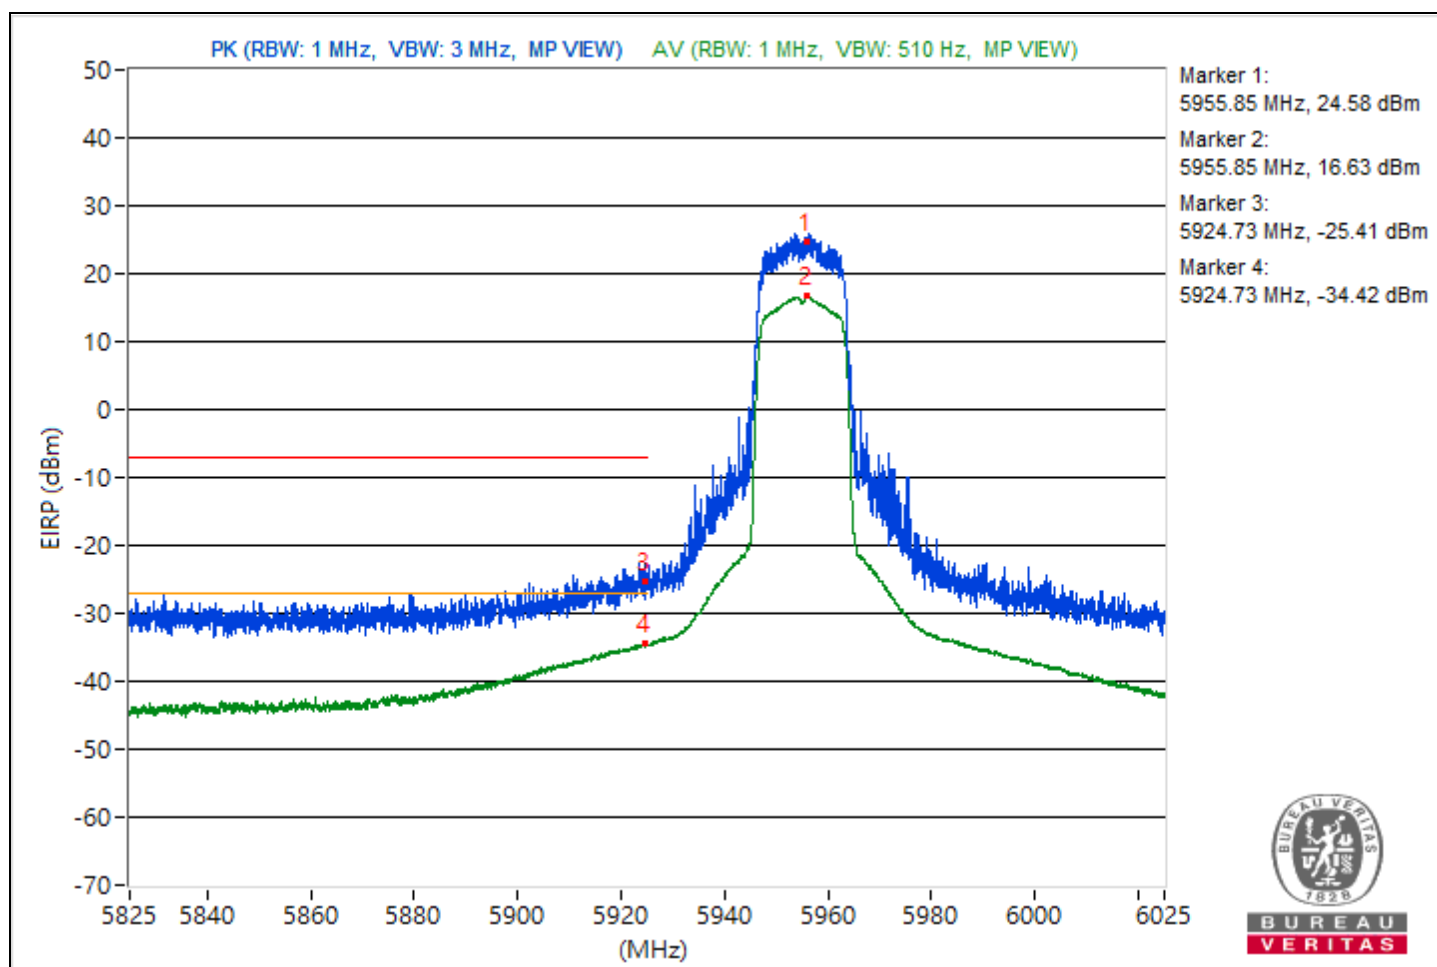


|                 |                     |                          |                   |
|-----------------|---------------------|--------------------------|-------------------|
| RF Mode         | 802.11a             | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung         |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6854.09        | 121.02 PK               |                |             | 17.39                   | 8.37                   | 25.76            |
| 2                   | *6854.09        | 112.27 AV               |                |             | 8.64                    | 8.37                   | 17.01            |
| 3                   | #7203.61        | 64.81 PK                | 88.26          | -23.45      | -38.82                  | 8.37                   | -30.45           |
| 4                   | #7203.61        | 52.78 AV                | 68.26          | -15.48      | -50.85                  | 8.37                   | -42.48           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

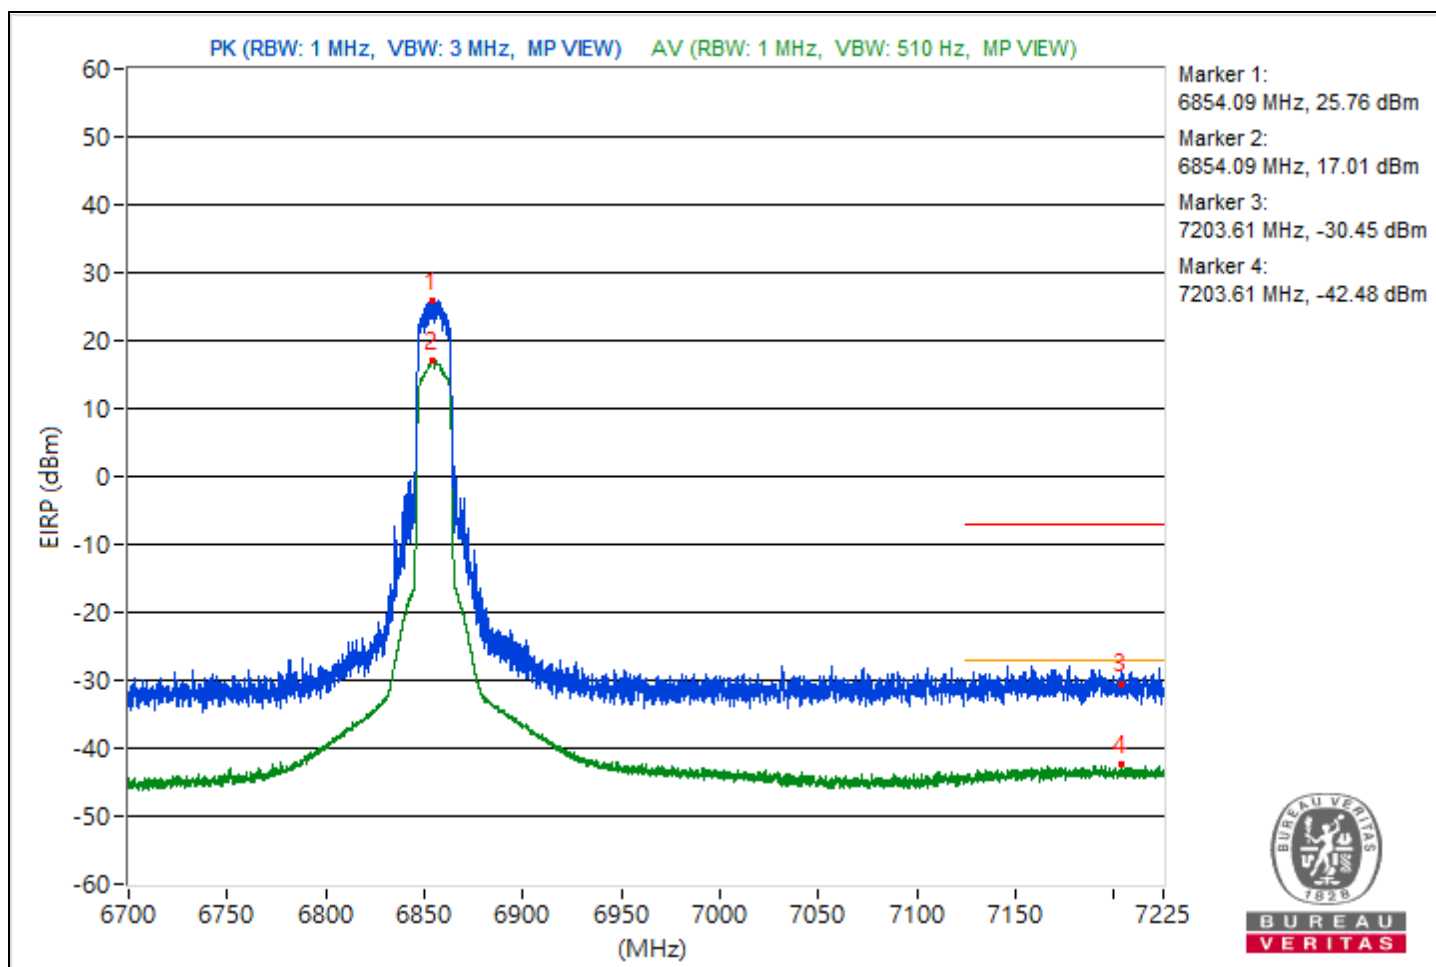


# 1S1T

|                 |                       |                          |                 |
|-----------------|-----------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20)      | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung           |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5956.05        | 120.15 PK               |                |             | 16.52                   | 8.37                   | 24.89            |
| 2                   | *5956.05        | 110.67 AV               |                |             | 7.04                    | 8.37                   | 15.41            |
| 3                   | #5924.82        | 66.97 PK                | 88.26          | -21.29      | -36.66                  | 8.37                   | -28.29           |
| 4                   | #5924.82        | 60.17 AV                | 68.26          | -8.09       | -43.46                  | 8.37                   | -35.09           |

## Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

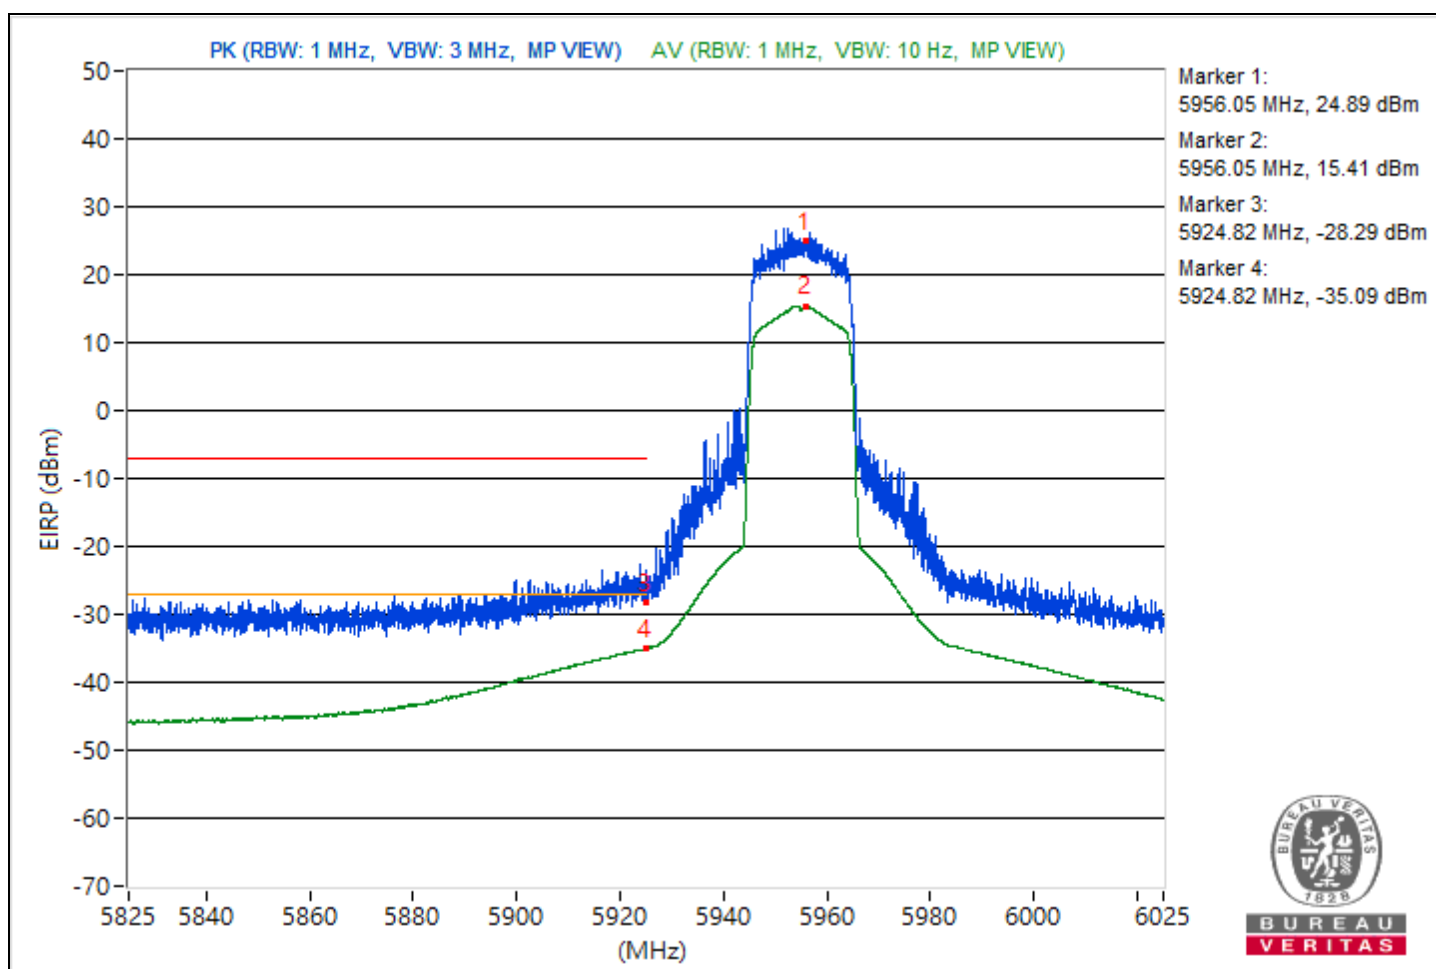


|                 |                     |                          |                   |
|-----------------|---------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20)    | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung         |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6854.09        | 120.54 PK               |                |             | 16.91                   | 8.37                   | 25.28            |
| 2                   | *6854.09        | 110.66 AV               |                |             | 7.03                    | 8.37                   | 15.4             |
| 3                   | #7205.64        | 64.74 PK                | 88.26          | -23.52      | -38.89                  | 8.37                   | -30.52           |
| 4                   | #7205.64        | 49.99 AV                | 68.26          | -18.27      | -53.64                  | 8.37                   | -45.27           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

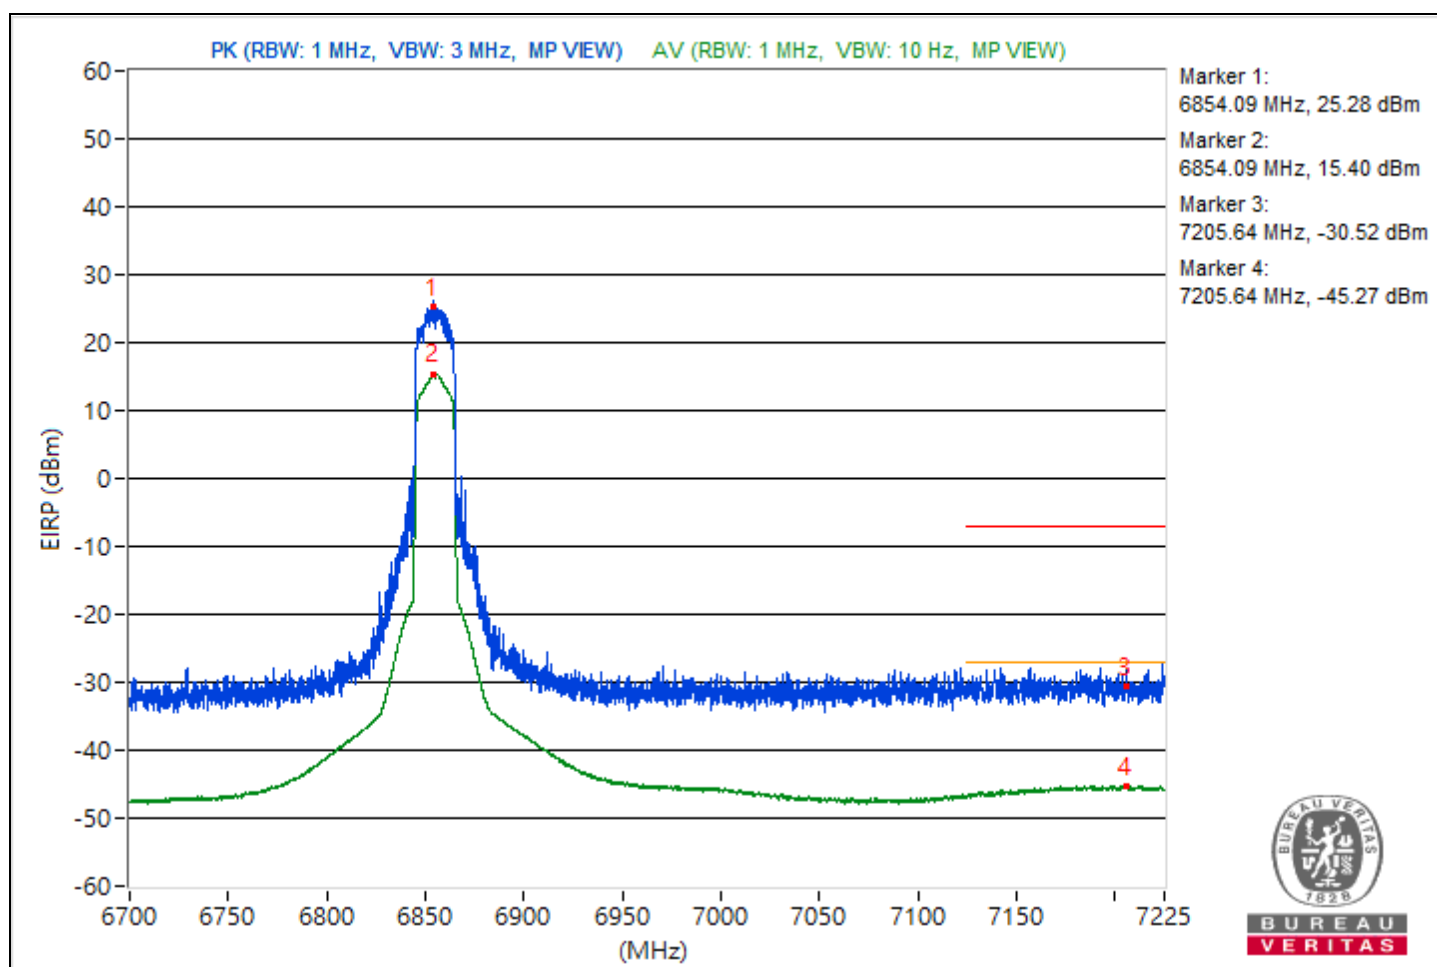


|                 |                       |                          |                 |
|-----------------|-----------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT40)      | Channel                  | CH 3 : 5965 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung           |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5963.62        | 117.16 PK               |                |             | 13.53                   | 8.37                   | 21.9             |
| 2                   | *5963.62        | 108.01 AV               |                |             | 4.38                    | 8.37                   | 12.75            |
| 3                   | #5924.98        | 78.82 PK                | 88.26          | -9.44       | -24.81                  | 8.37                   | -16.44           |
| 4                   | #5924.98        | 66.16 AV                | 68.26          | -2.1        | -37.47                  | 8.37                   | -29.1            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

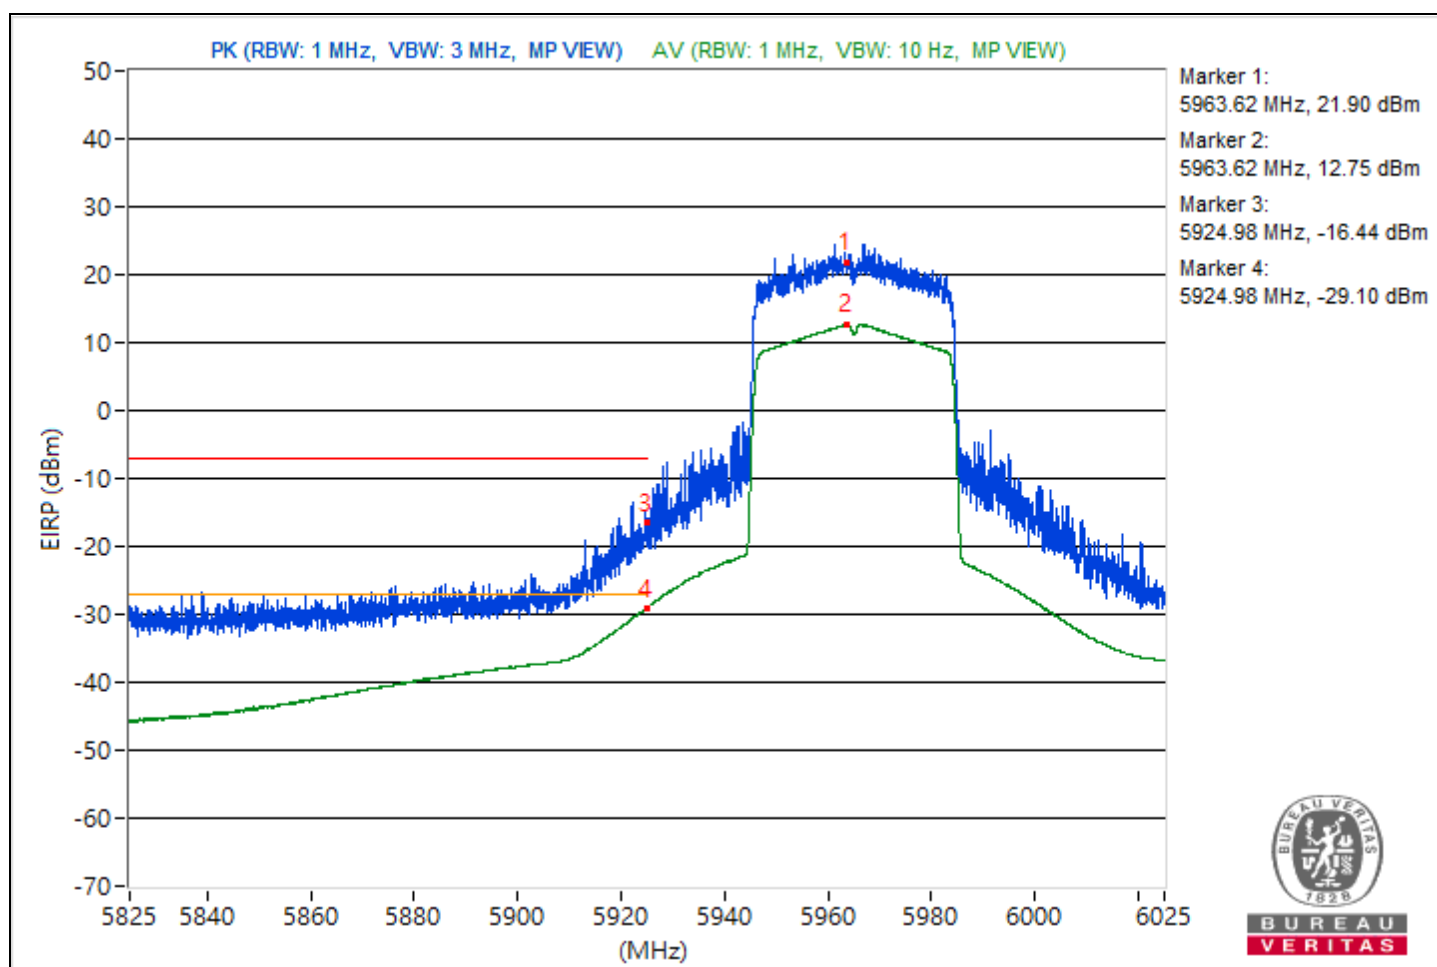


|                 |                     |                          |                   |
|-----------------|---------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT40)    | Channel                  | CH 179 : 6845 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung         |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6843.65        | 116.22 PK               |                |             | 12.59                   | 8.37                   | 20.96            |
| 2                   | *6843.65        | 106.98 AV               |                |             | 3.35                    | 8.37                   | 11.72            |
| 3                   | #7193.63        | 63.67 PK                | 88.26          | -24.59      | -39.96                  | 8.37                   | -31.59           |
| 4                   | #7193.63        | 50.2 AV                 | 68.26          | -18.06      | -53.43                  | 8.37                   | -45.06           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

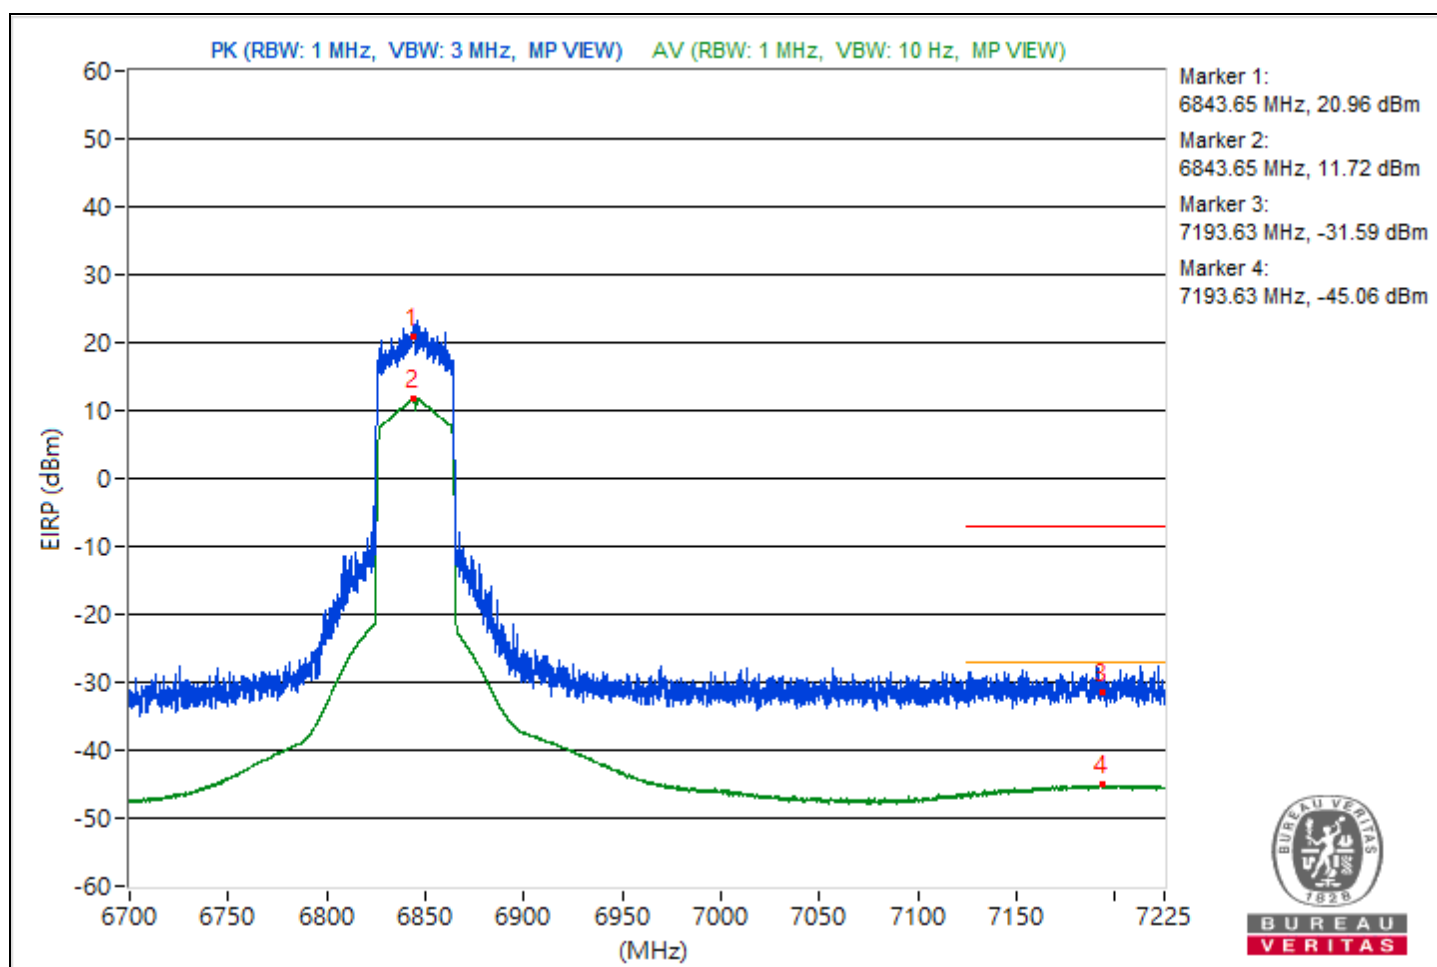


|                 |                       |                          |                 |
|-----------------|-----------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT80)      | Channel                  | CH 7 : 5985 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung           |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5983.4         | 112.85 PK               |                |             | 9.22                    | 8.37                   | 17.59            |
| 2                   | *5983.4         | 104.89 AV               |                |             | 1.26                    | 8.37                   | 9.63             |
| 3                   | #5924.87        | 77.3 PK                 | 88.26          | -10.96      | -26.33                  | 8.37                   | -17.96           |
| 4                   | #5924.87        | 67.11 AV                | 68.26          | -1.15       | -36.52                  | 8.37                   | -28.15           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

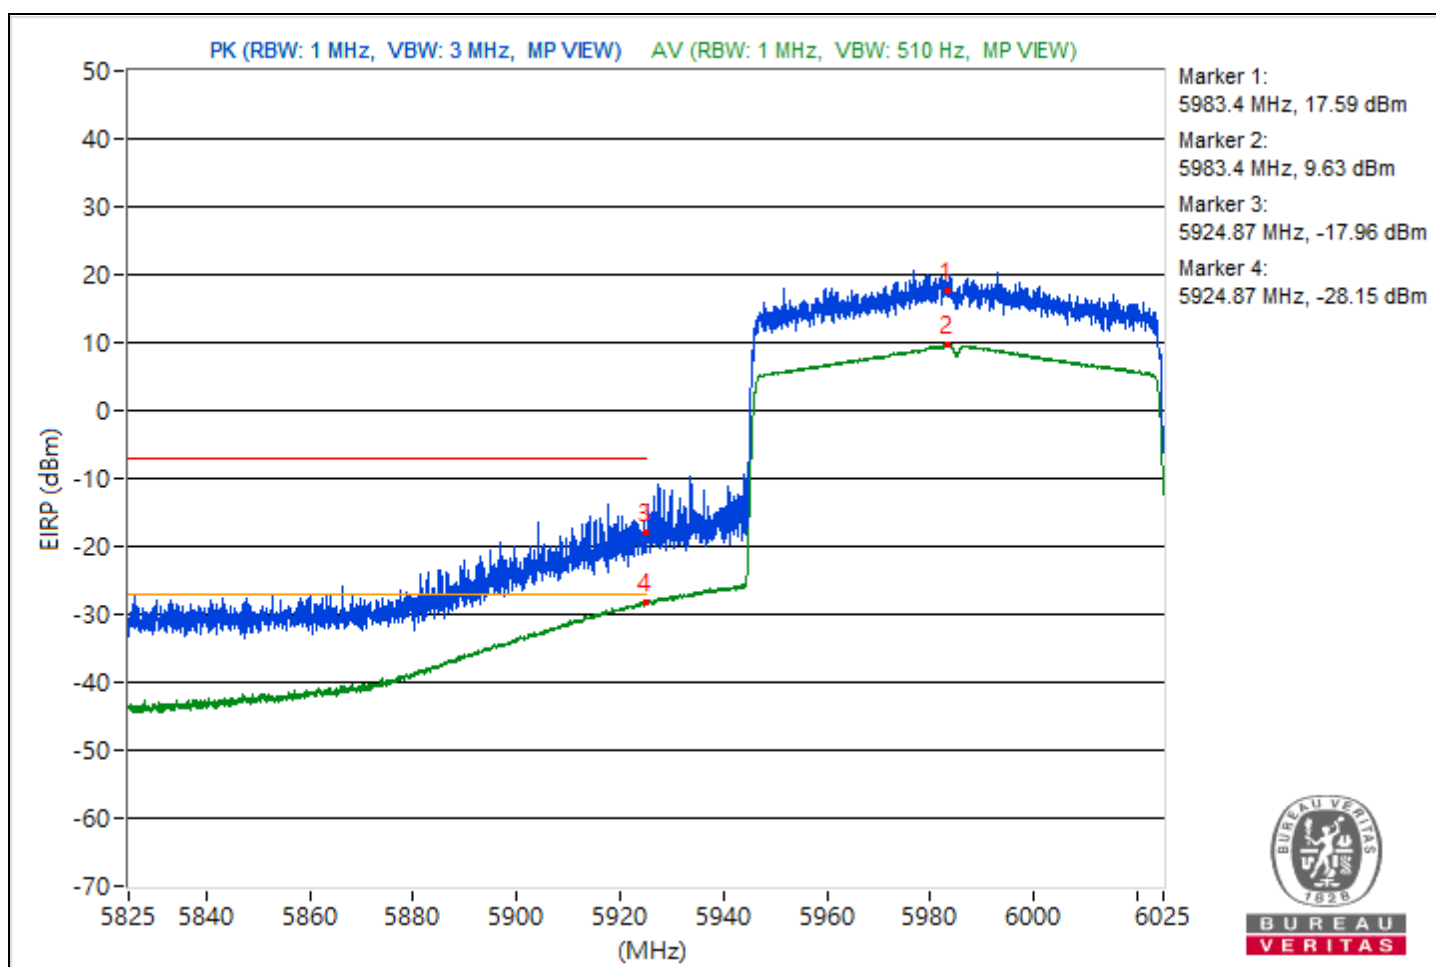


|                 |                     |                          |                   |
|-----------------|---------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT80)    | Channel                  | CH 167 : 6785 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung         |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | #6866.69        | 112.66 PK               |                |             | 9.03                    | 8.37                   | 17.4             |
| 2                   | #6866.69        | 104.31 AV               |                |             | 0.68                    | 8.37                   | 9.05             |
| 3                   | #7207.61        | 64.26 PK                | 88.26          | -24         | -39.37                  | 8.37                   | -31              |
| 4                   | #7207.61        | 52.8 AV                 | 68.26          | -15.46      | -50.83                  | 8.37                   | -42.46           |

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band, the limit was restricted at the Conducted Out of Band Emissions.
3. " # ": The radiated frequency is out of the restricted band.

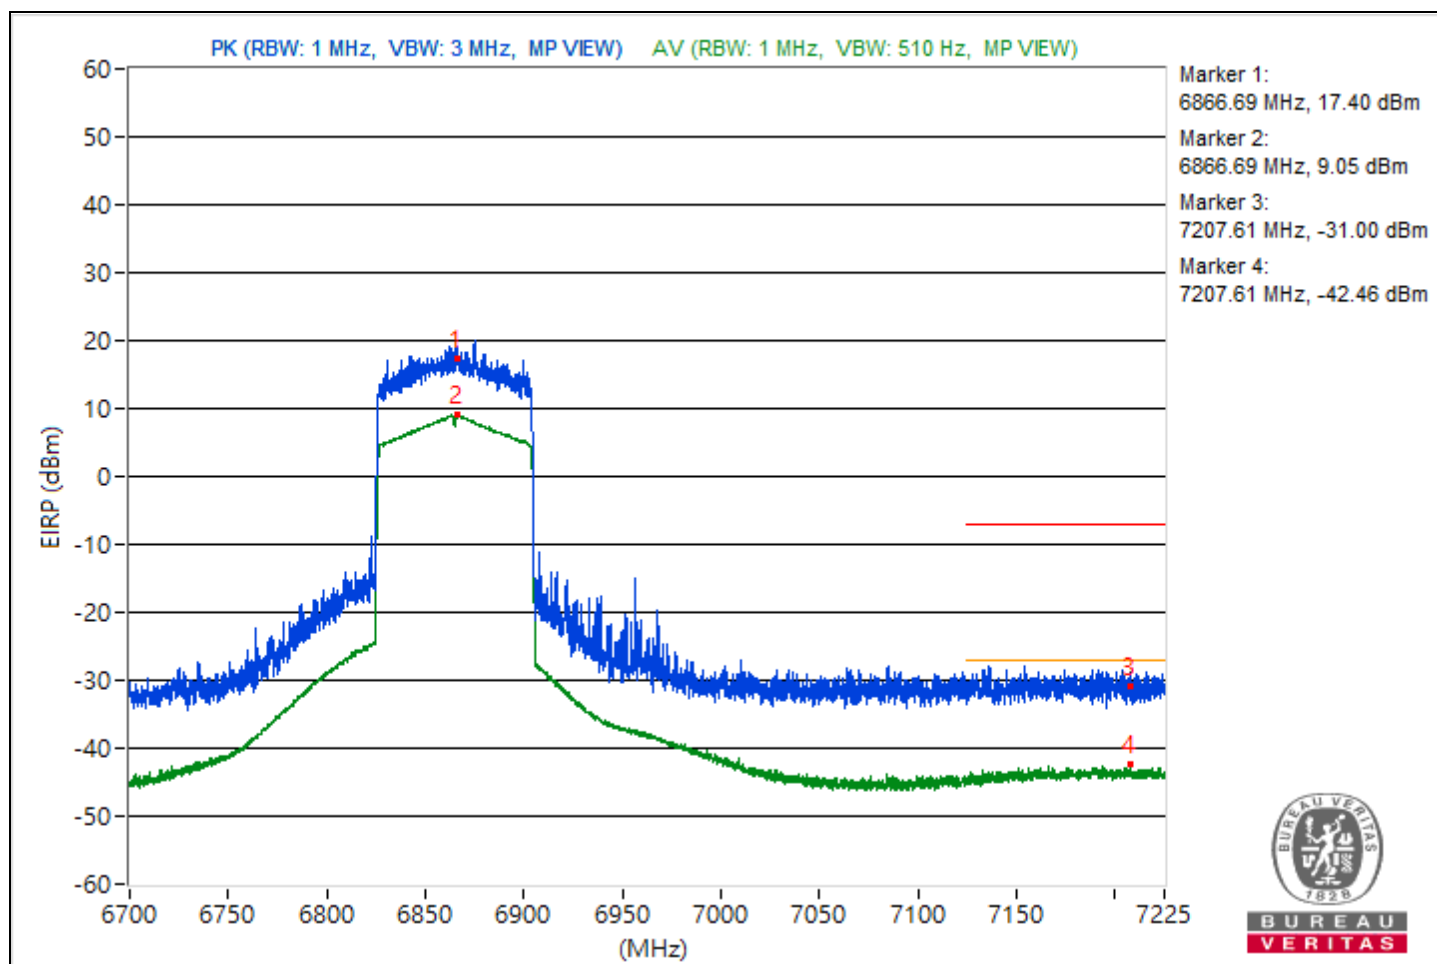


|                 |                       |                          |                  |
|-----------------|-----------------------|--------------------------|------------------|
| RF Mode         | 802.11be (EHT160)     | Channel                  | CH 15 : 6025 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz | Environmental Conditions | 25°C, 60% RH     |
| Tested By       | Dolly Chung           |                          |                  |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6021.8         | 109.66 PK               |                |             | 6.03                    | 8.37                   | 14.4             |
| 2                   | *6021.8         | 99.88 AV                |                |             | -3.75                   | 8.37                   | 4.62             |
| 3                   | #5921.05        | 69.69 PK                | 88.26          | -18.57      | -33.94                  | 8.37                   | -25.57           |
| 4                   | #5921.05        | 62.03 AV                | 68.26          | -6.23       | -41.6                   | 8.37                   | -33.23           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

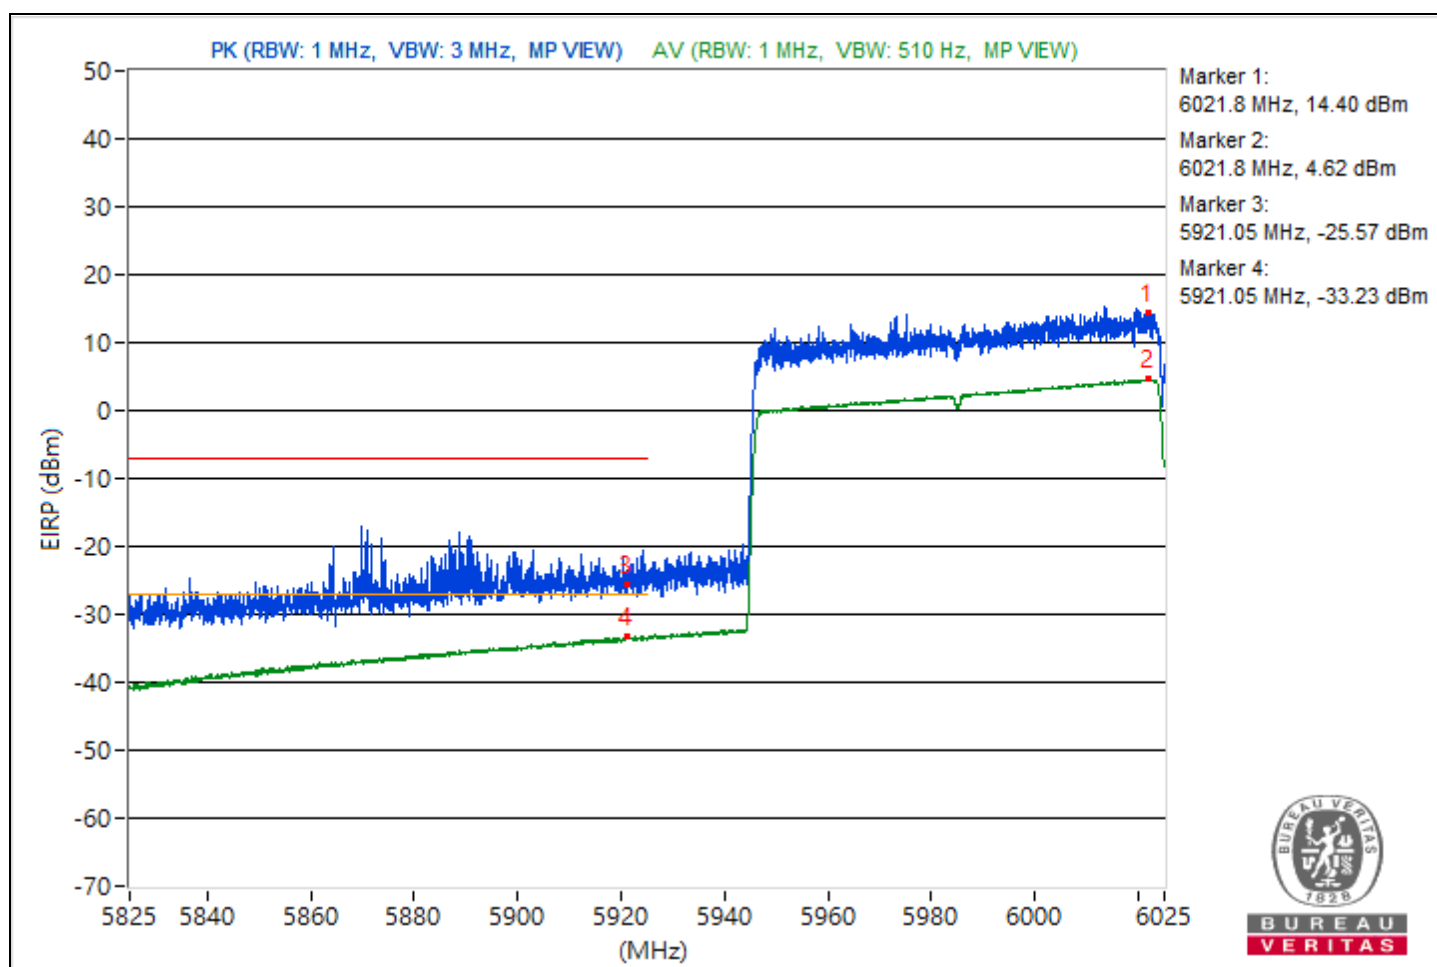


|                 |                     |                          |                   |
|-----------------|---------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT160)   | Channel                  | CH 143 : 6665 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung         |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6700.72        | 104.52 PK               |                |             | 0.89                    | 8.37                   | 9.26             |
| 2                   | *6700.72        | 96.89 AV                |                |             | -6.74                   | 8.37                   | 1.63             |
| 3                   | #7216.01        | 64.04 PK                | 88.26          | -24.22      | -39.59                  | 8.37                   | -31.22           |
| 4                   | #7216.01        | 52.84 AV                | 68.26          | -15.42      | -50.79                  | 8.37                   | -42.42           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

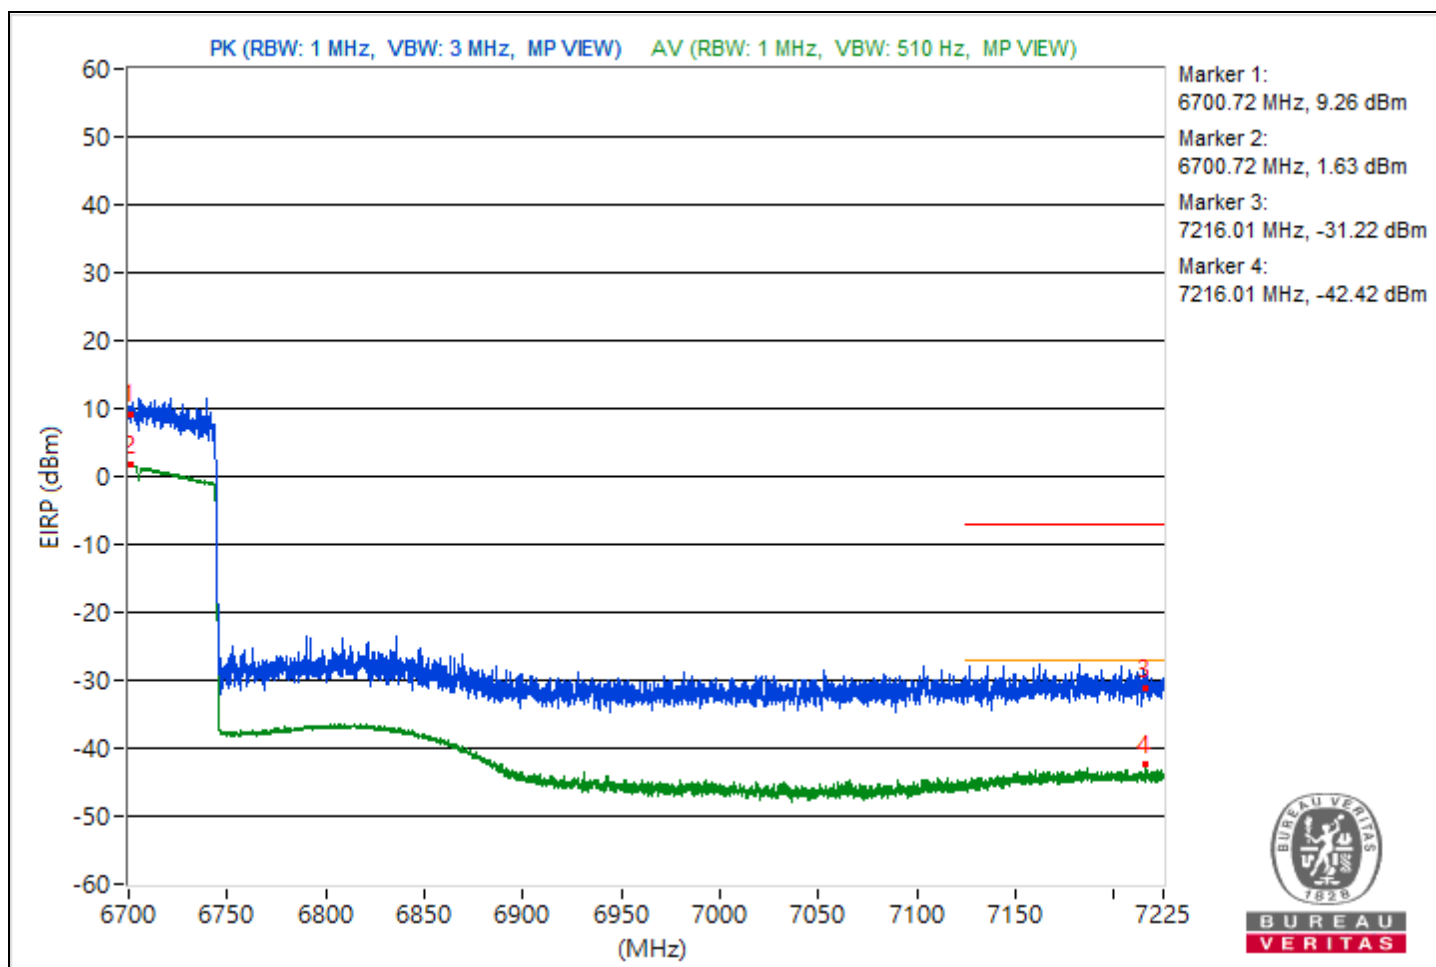


|                 |                             |                          |                 |
|-----------------|-----------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz       | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                 |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5946.52        | 120.33 PK               |                |             | 16.7                    | 8.37                   | 25.07            |
| 2                   | *5946.52        | 111.71 AV               |                |             | 8.08                    | 8.37                   | 16.45            |
| 3                   | #5912.57        | 65.75 PK                | 88.26          | -22.51      | -37.88                  | 8.37                   | -29.51           |
| 4                   | #5912.57        | 53.95 AV                | 68.26          | -14.31      | -49.68                  | 8.37                   | -41.31           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

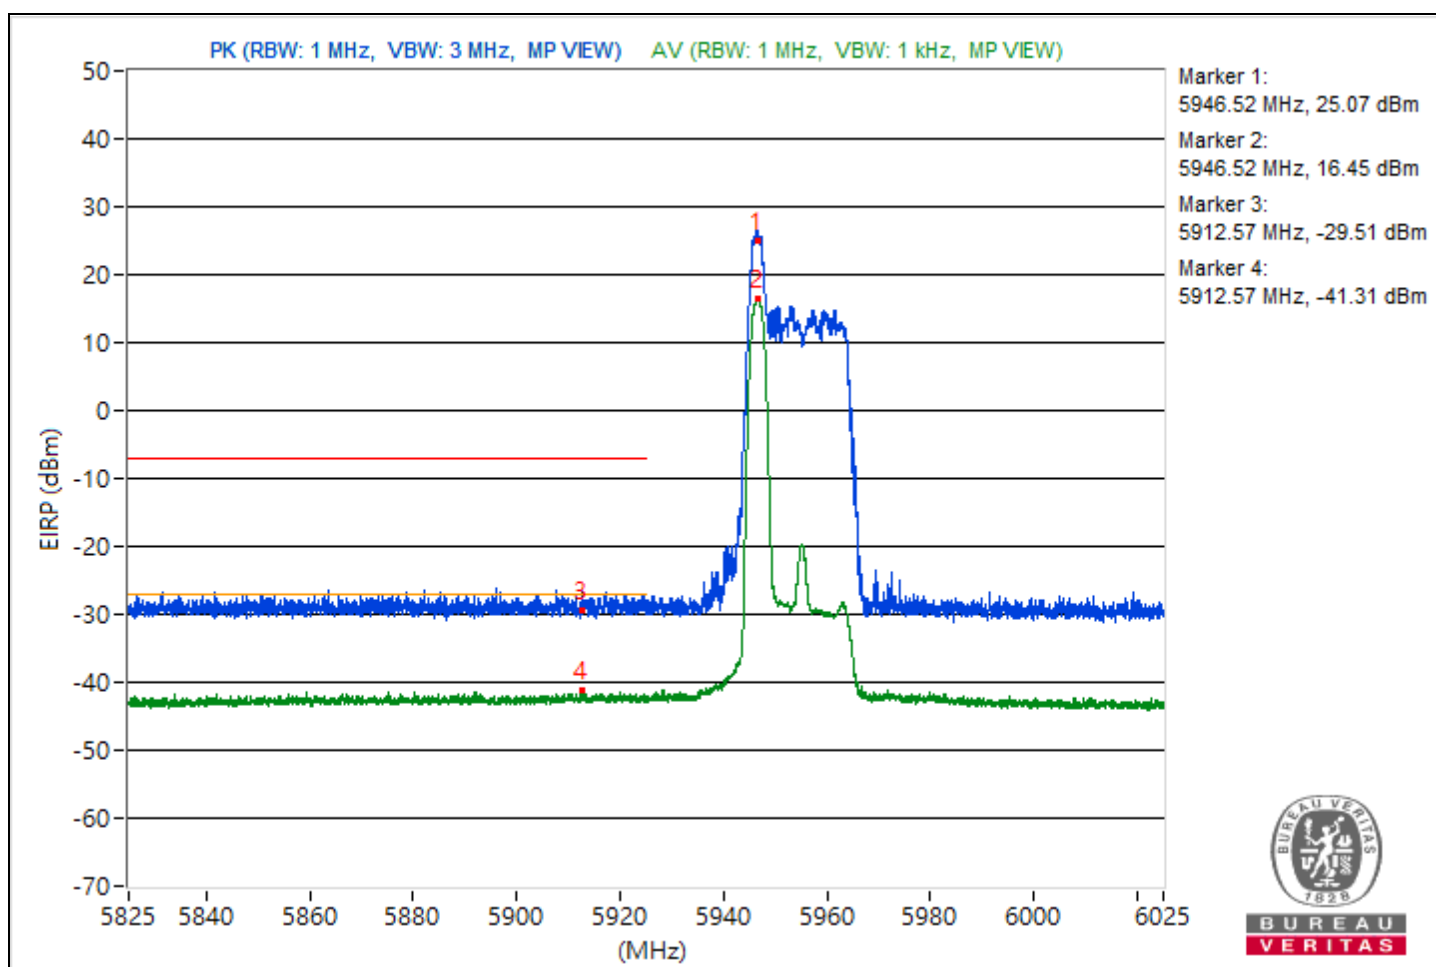


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 26-tone RU | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz         | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6863.54        | 120.12 PK               |                |             | 16.49                   | 8.37                   | 24.86            |
| 2                   | *6863.54        | 111.39 AV               |                |             | 7.76                    | 8.37                   | 16.13            |
| 3                   | #7164.56        | 65.84 PK                | 88.26          | -22.42      | -37.79                  | 8.37                   | -29.42           |
| 4                   | #7164.56        | 54.08 AV                | 68.26          | -14.18      | -49.55                  | 8.37                   | -41.18           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

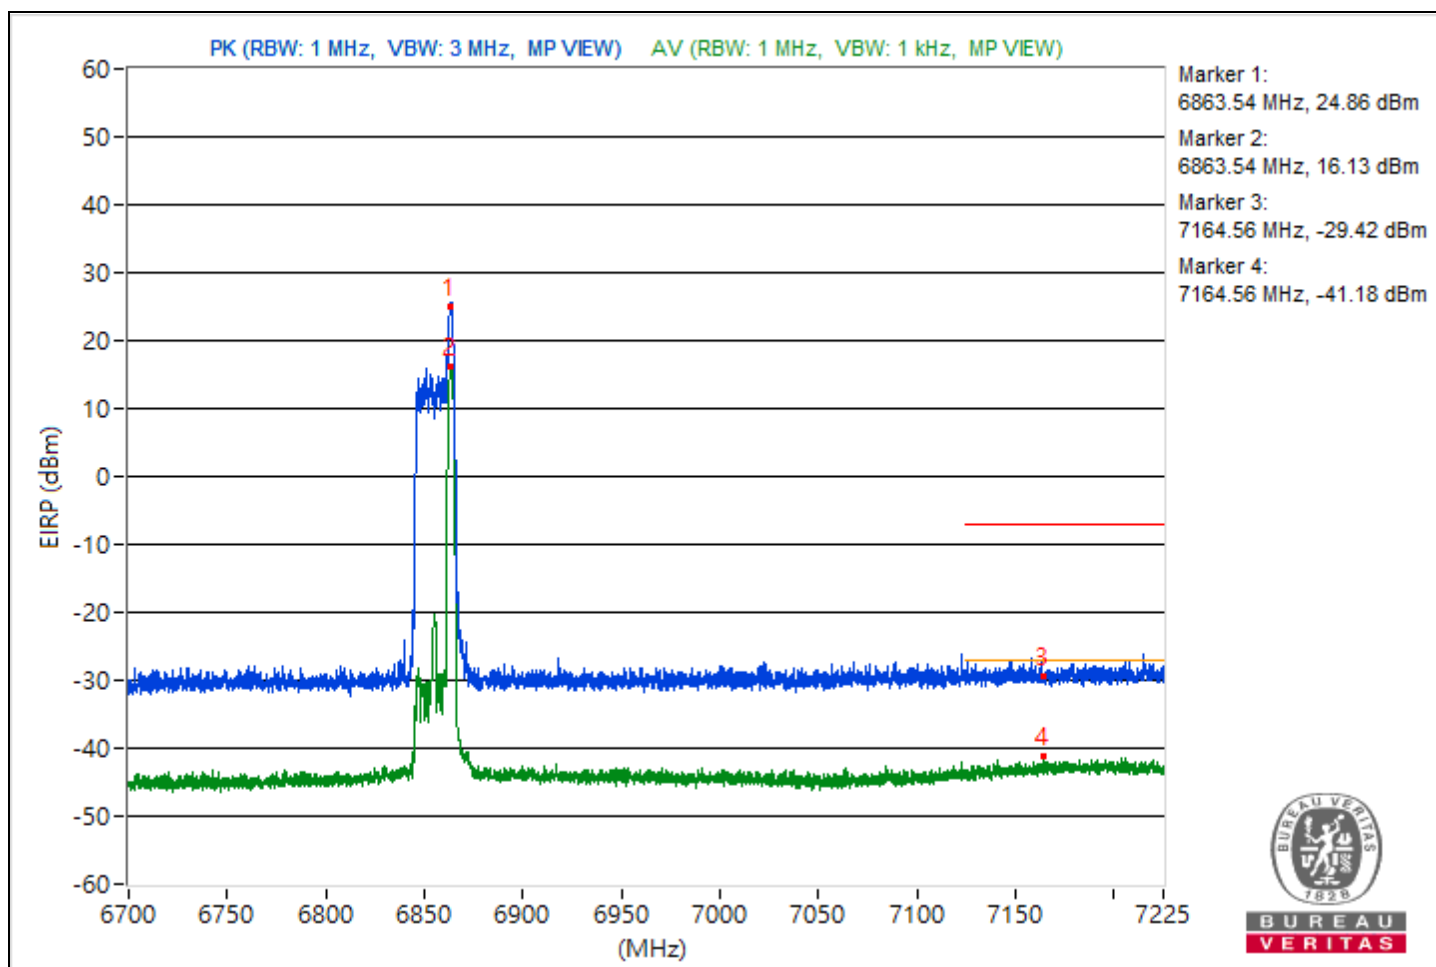


|                 |                             |                          |                 |
|-----------------|-----------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz       | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                 |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5947.87        | 121.32 PK               |                |             | 17.69                   | 8.37                   | 26.06            |
| 2                   | *5947.87        | 111.95 AV               |                |             | 8.32                    | 8.37                   | 16.69            |
| 3                   | #5884.3         | 66.08 PK                | 88.26          | -22.18      | -37.55                  | 8.37                   | -29.18           |
| 4                   | #5884.3         | 54.09 AV                | 68.26          | -14.17      | -49.54                  | 8.37                   | -41.17           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

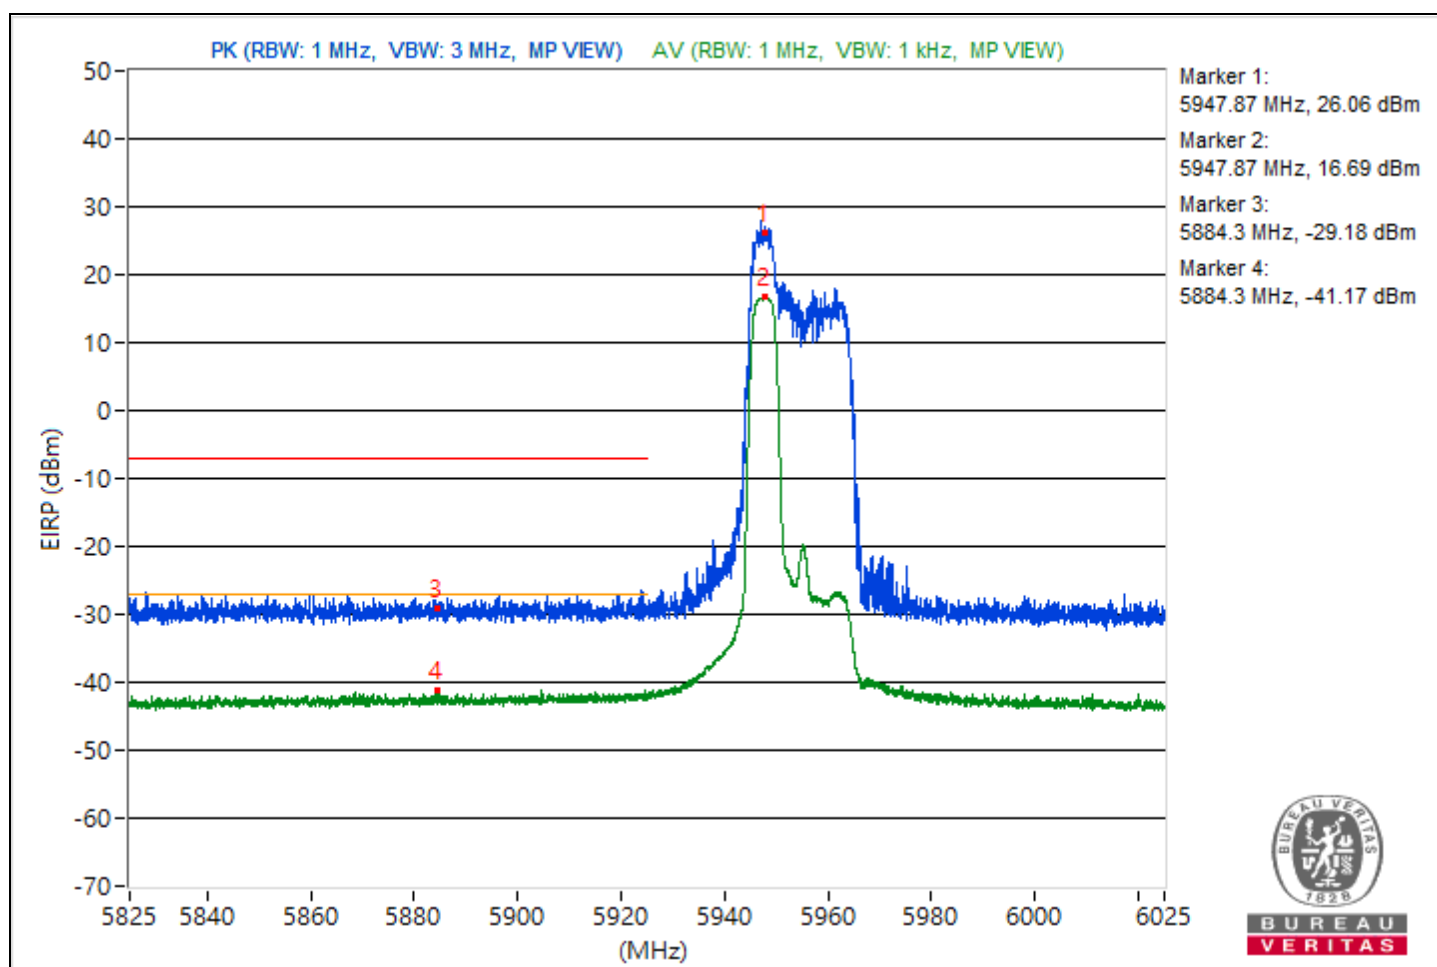


|                 |                             |                          |                   |
|-----------------|-----------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52-tone RU | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz         | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                 |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6863.21        | 119.94 PK               |                |             | 16.31                   | 8.37                   | 24.68            |
| 2                   | *6863.21        | 111.52 AV               |                |             | 7.89                    | 8.37                   | 16.26            |
| 3                   | #7194.35        | 65.56 PK                | 88.26          | -22.7       | -38.07                  | 8.37                   | -29.7            |
| 4                   | #7194.35        | 53.54 AV                | 68.26          | -14.72      | -50.09                  | 8.37                   | -41.72           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

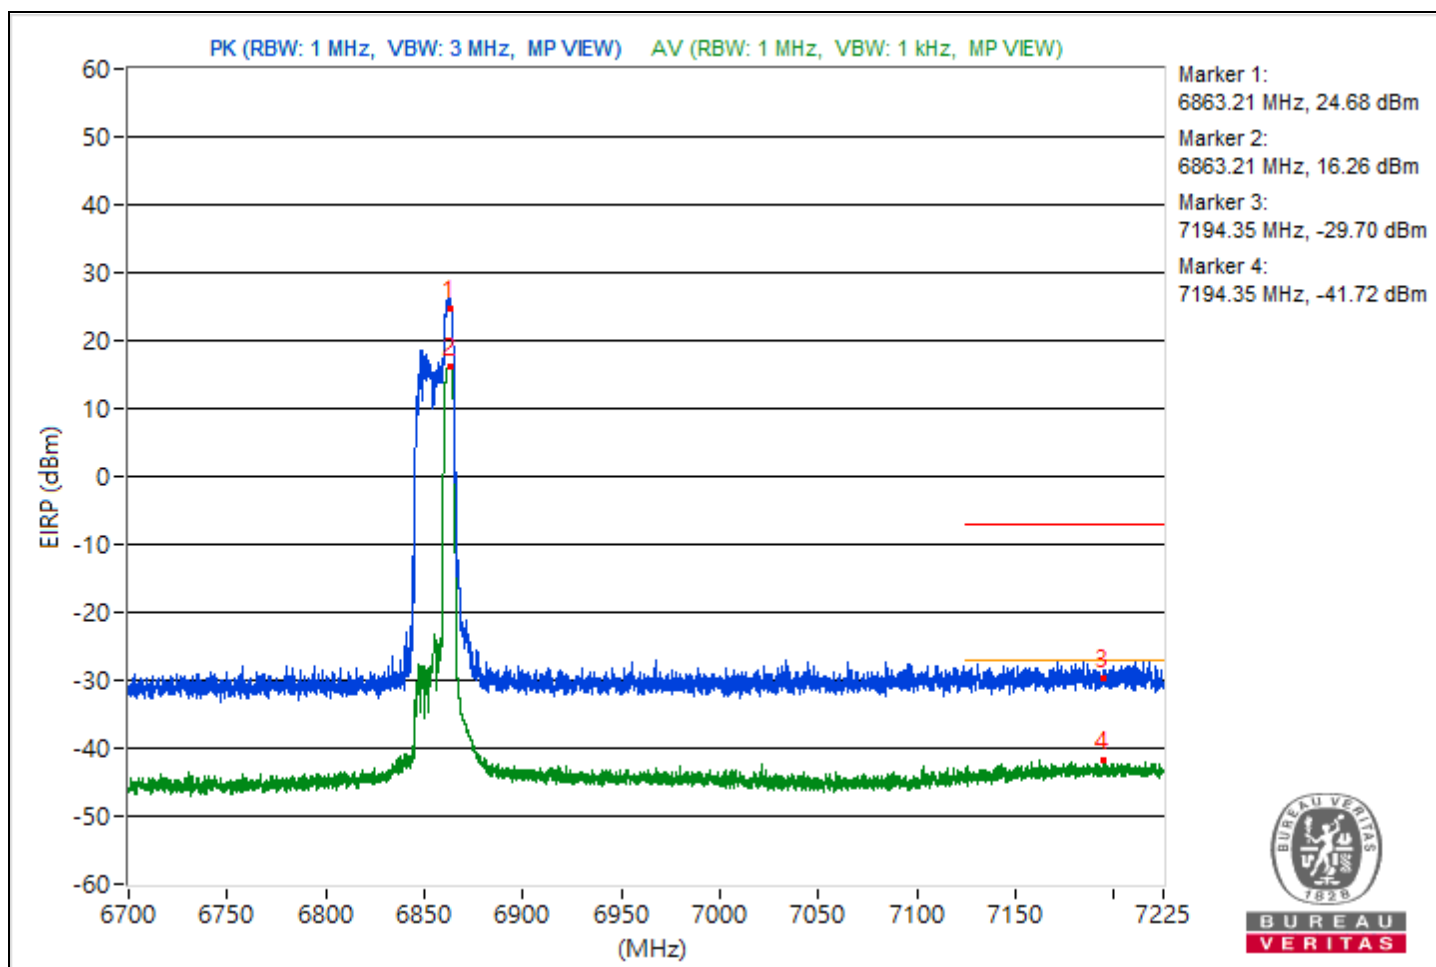


|                 |                              |                          |                 |
|-----------------|------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz        | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                  |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5948.87        | 121.51 PK               |                |             | 17.88                   | 8.37                   | 26.25            |
| 2                   | *5948.87        | 111.33 AV               |                |             | 7.7                     | 8.37                   | 16.07            |
| 3                   | #5924.65        | 70.37 PK                | 88.26          | -17.89      | -33.26                  | 8.37                   | -24.89           |
| 4                   | #5924.65        | 57.85 AV                | 68.26          | -10.41      | -45.78                  | 8.37                   | -37.41           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

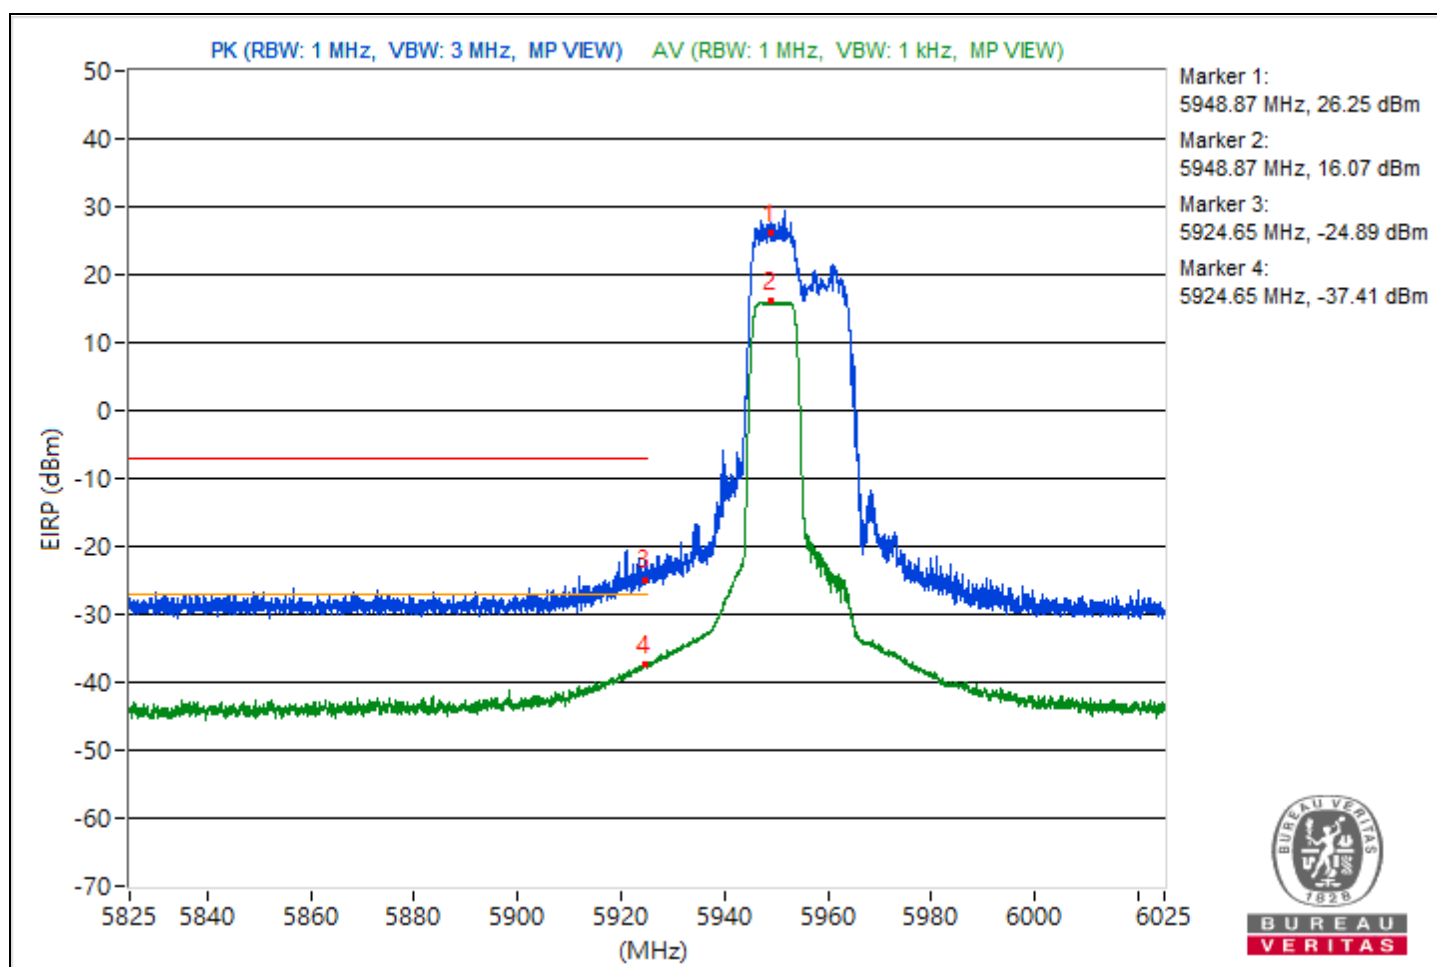


|                 |                              |                          |                   |
|-----------------|------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 106-tone RU | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz          | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                  |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6860.19        | 118.6 PK                |                |             | 14.97                   | 8.37                   | 23.34            |
| 2                   | *6860.19        | 111.39 AV               |                |             | 7.76                    | 8.37                   | 16.13            |
| 3                   | #7190.74        | 65.83 PK                | 88.26          | -22.43      | -37.8                   | 8.37                   | -29.43           |
| 4                   | #7190.74        | 53.09 AV                | 68.26          | -15.17      | -50.54                  | 8.37                   | -42.17           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

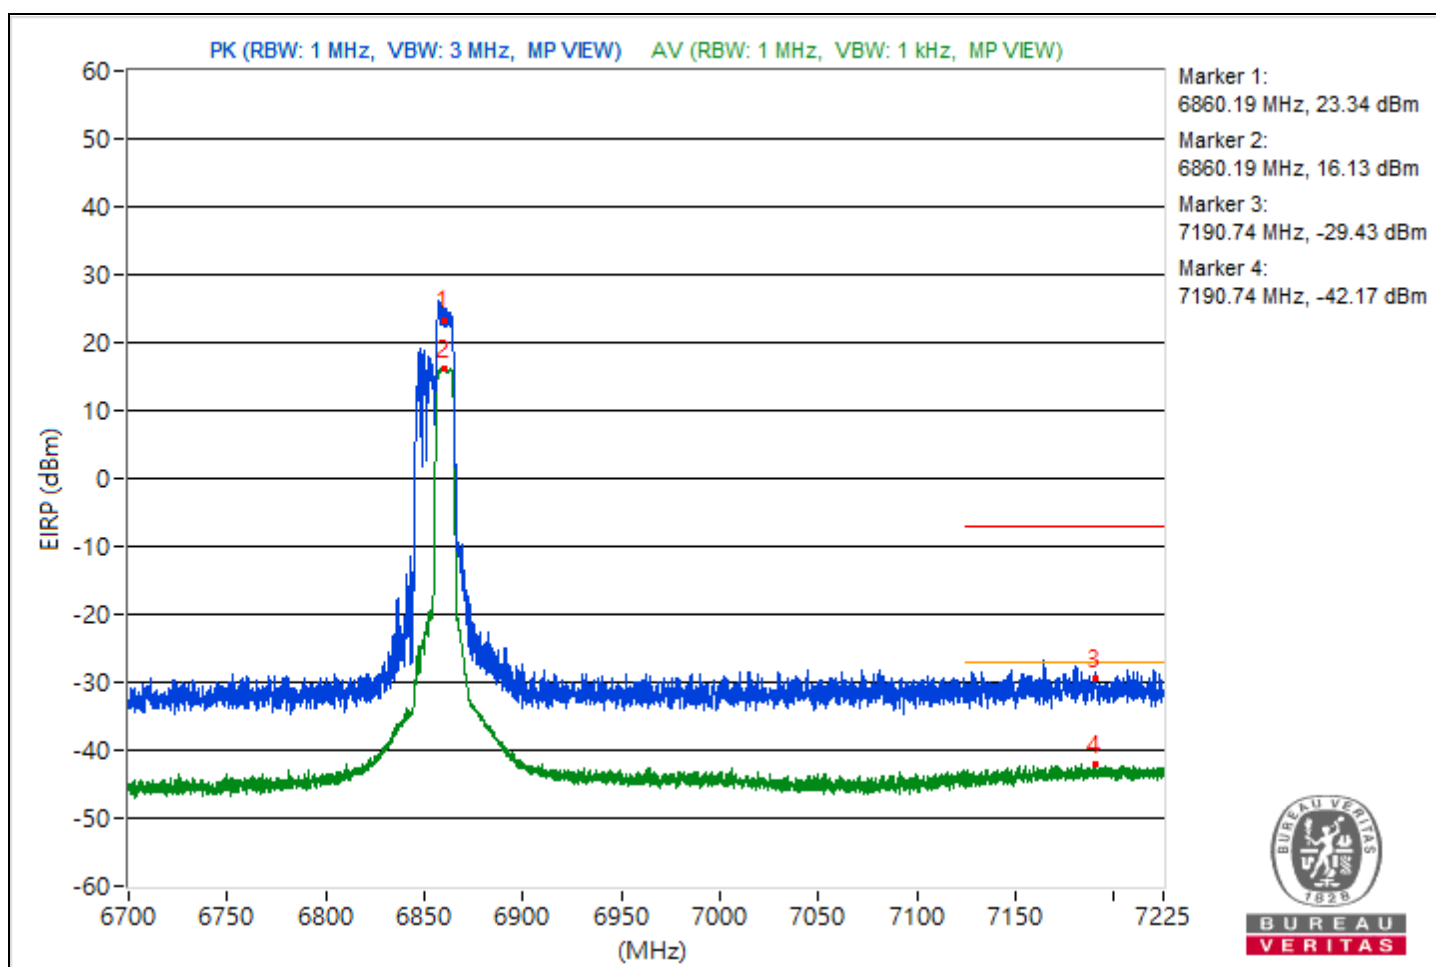


|                 |                                |                          |                 |
|-----------------|--------------------------------|--------------------------|-----------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 1 : 5955 MHz |
| Frequency Range | 5.825 GHz ~ 6.025 GHz          | Environmental Conditions | 25°C, 60% RH    |
| Tested By       | Dolly Chung                    |                          |                 |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5952.12        | 120.1 PK                |                |             | 16.47                   | 8.37                   | 24.84            |
| 2                   | *5952.12        | 111.56 AV               |                |             | 7.93                    | 8.37                   | 16.3             |
| 3                   | #5922.62        | 67.79 PK                | 88.26          | -20.47      | -35.84                  | 8.37                   | -27.47           |
| 4                   | #5922.62        | 54.96 AV                | 68.26          | -13.3       | -48.67                  | 8.37                   | -40.3            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

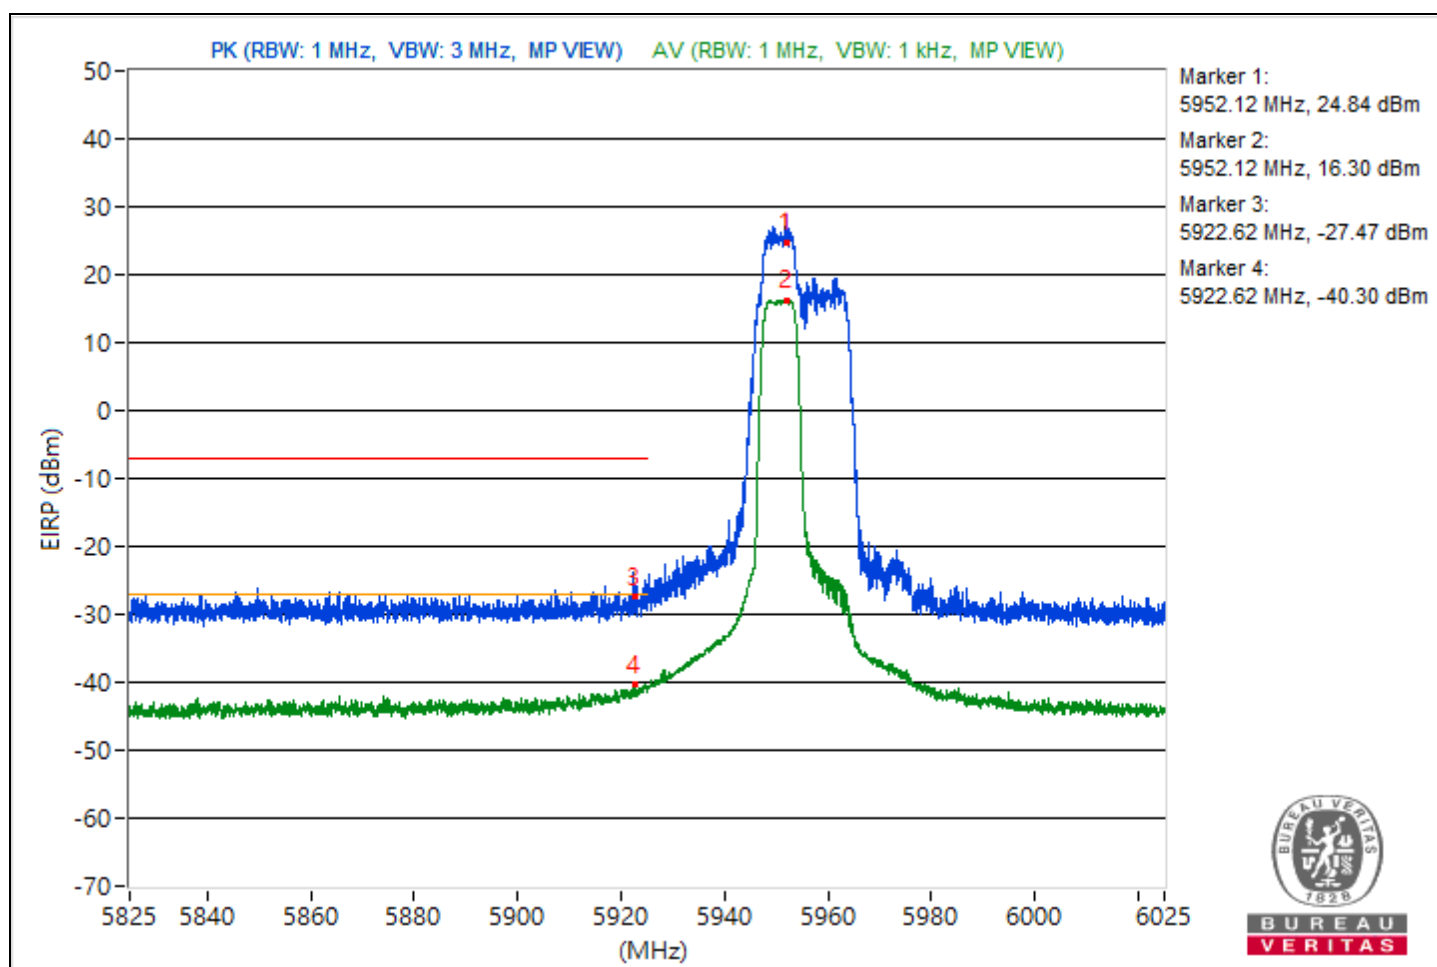

|                 |                                |                          |                   |
|-----------------|--------------------------------|--------------------------|-------------------|
| RF Mode         | 802.11be (EHT20) 52+26-tone RU | Channel                  | CH 181 : 6855 MHz |
| Frequency Range | 6.7 GHz ~ 7.225 GHz            | Environmental Conditions | 25°C, 60% RH      |
| Tested By       | Dolly Chung                    |                          |                   |

| Conducted Band Edge |                 |                         |                |             |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6858.42        | 120.26 PK               |                |             | 16.63                   | 8.37                   | 25               |
| 2                   | *6858.42        | 111.62 AV               |                |             | 7.99                    | 8.37                   | 16.36            |
| 3                   | #7203.61        | 62.96 PK                | 88.26          | -25.3       | -40.67                  | 8.37                   | -32.3            |
| 4                   | #7203.61        | 53.4 AV                 | 68.26          | -14.86      | -50.23                  | 8.37                   | -41.86           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

