


RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.95	121.05 PK			17.42	8.37	25.79
2	*5953.95	111.54 AV			7.91	8.37	16.28
3	#5924.77	69.49 PK	88.26	-18.77	-34.14	8.37	-25.77
4	#5924.77	58.46 AV	68.26	-9.8	-45.17	8.37	-36.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

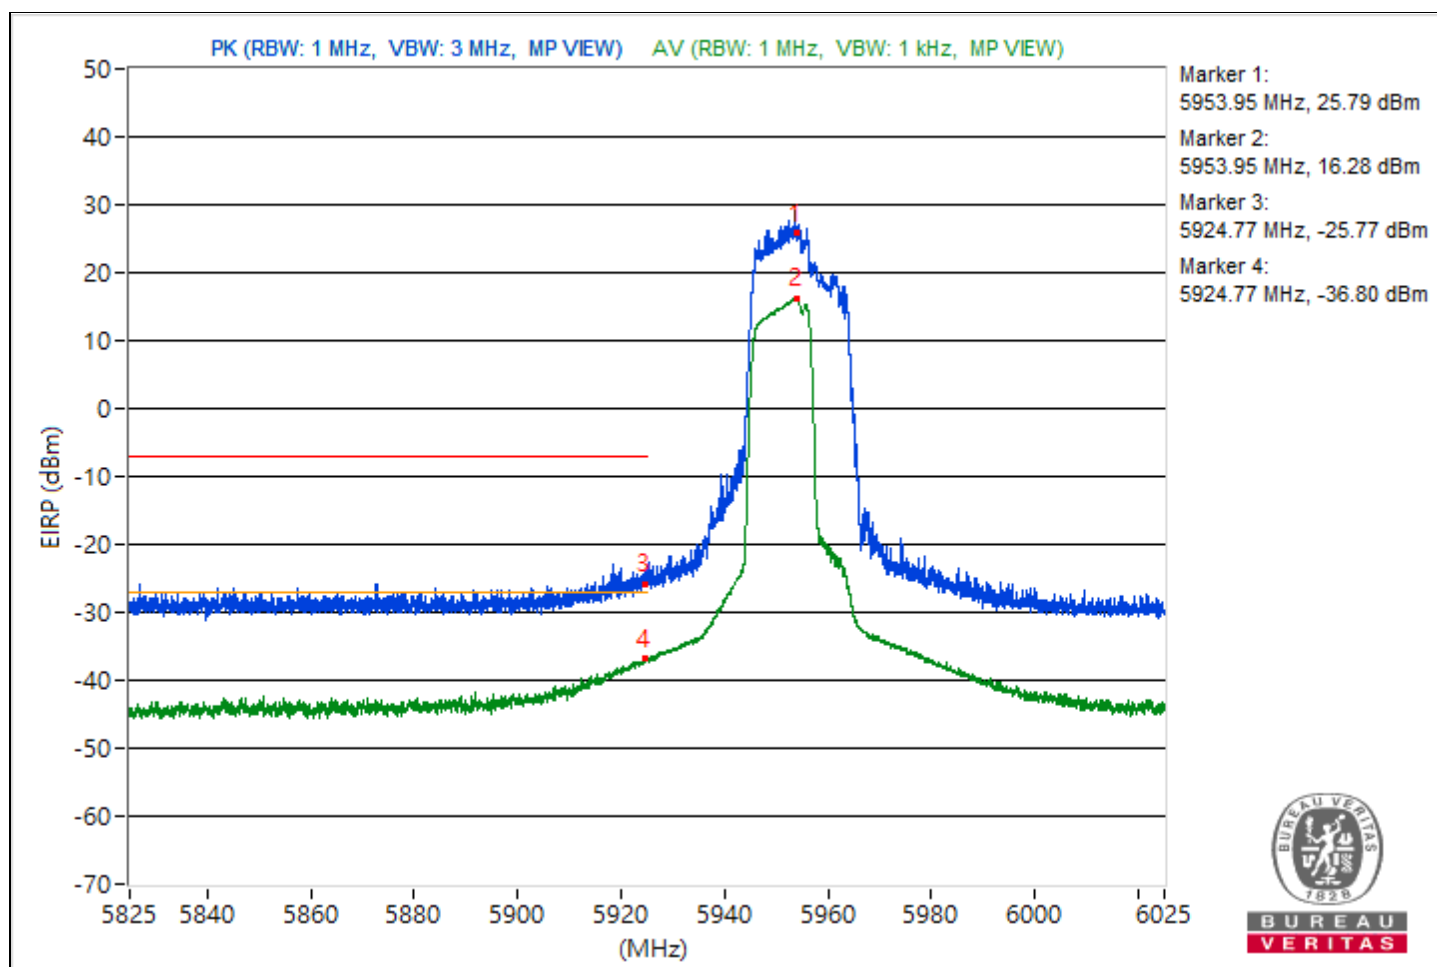


RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6856.58	118.99 PK			15.36	8.37	23.73
2	*6856.58	111.51 AV			7.88	8.37	16.25
3	#7190.61	64.31 PK	88.26	-23.95	-39.32	8.37	-30.95
4	#7190.61	53.52 AV	68.26	-14.74	-50.11	8.37	-41.74

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

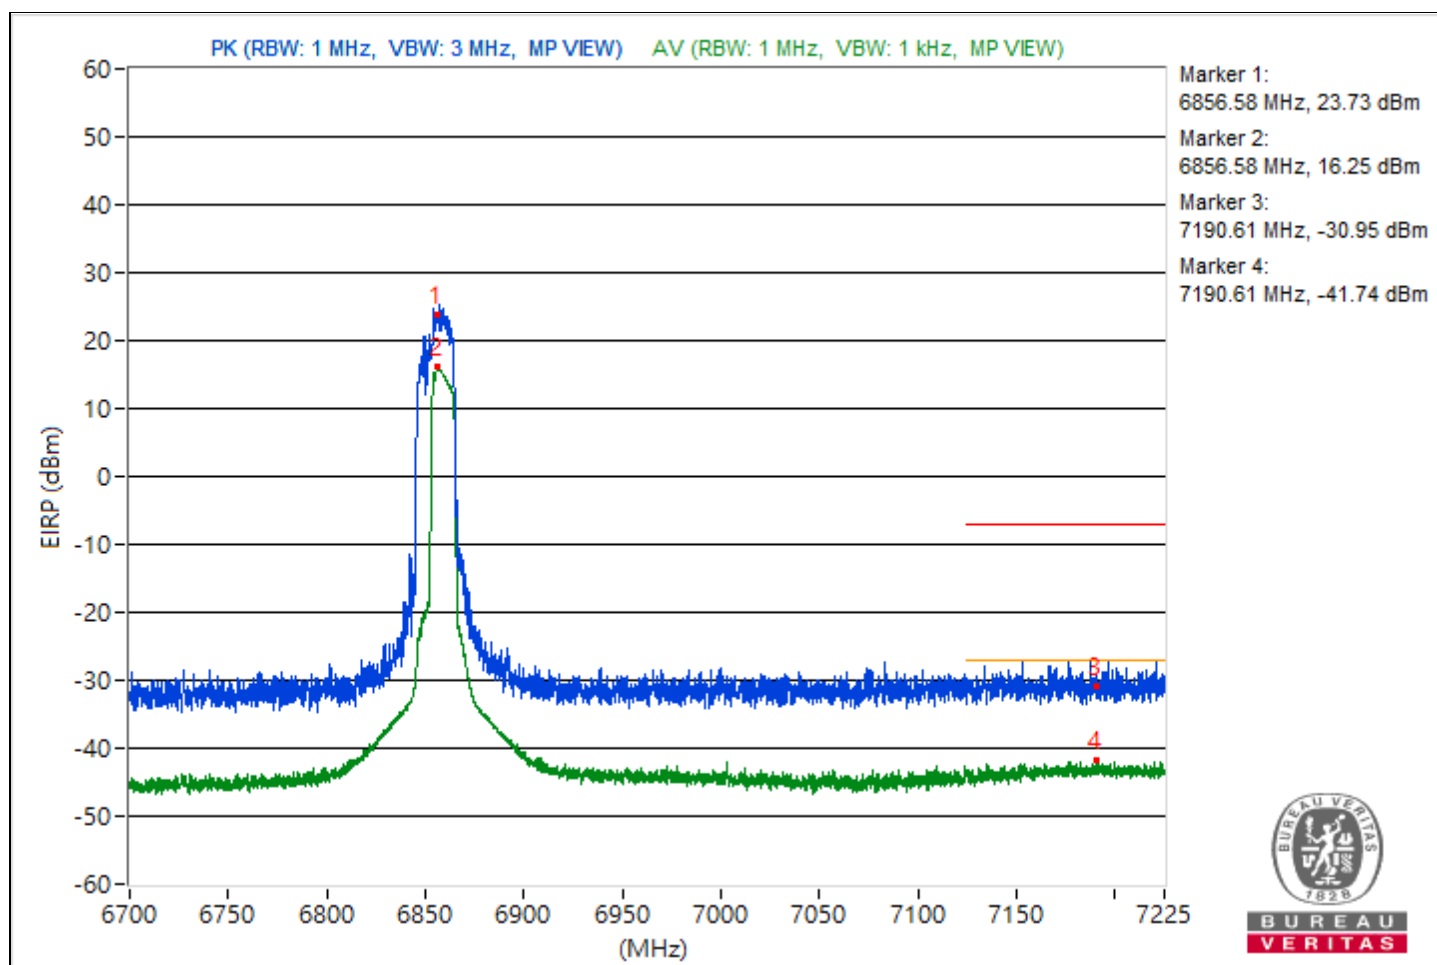


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5987.23	115.54 PK			11.91	8.37	20.28
2	*5987.23	106.11 AV			2.48	8.37	10.85
3	#5924.7	77.2 PK	88.26	-11.06	-26.43	8.37	-18.06
4	#5924.7	66.75 AV	68.26	-1.51	-36.88	8.37	-28.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

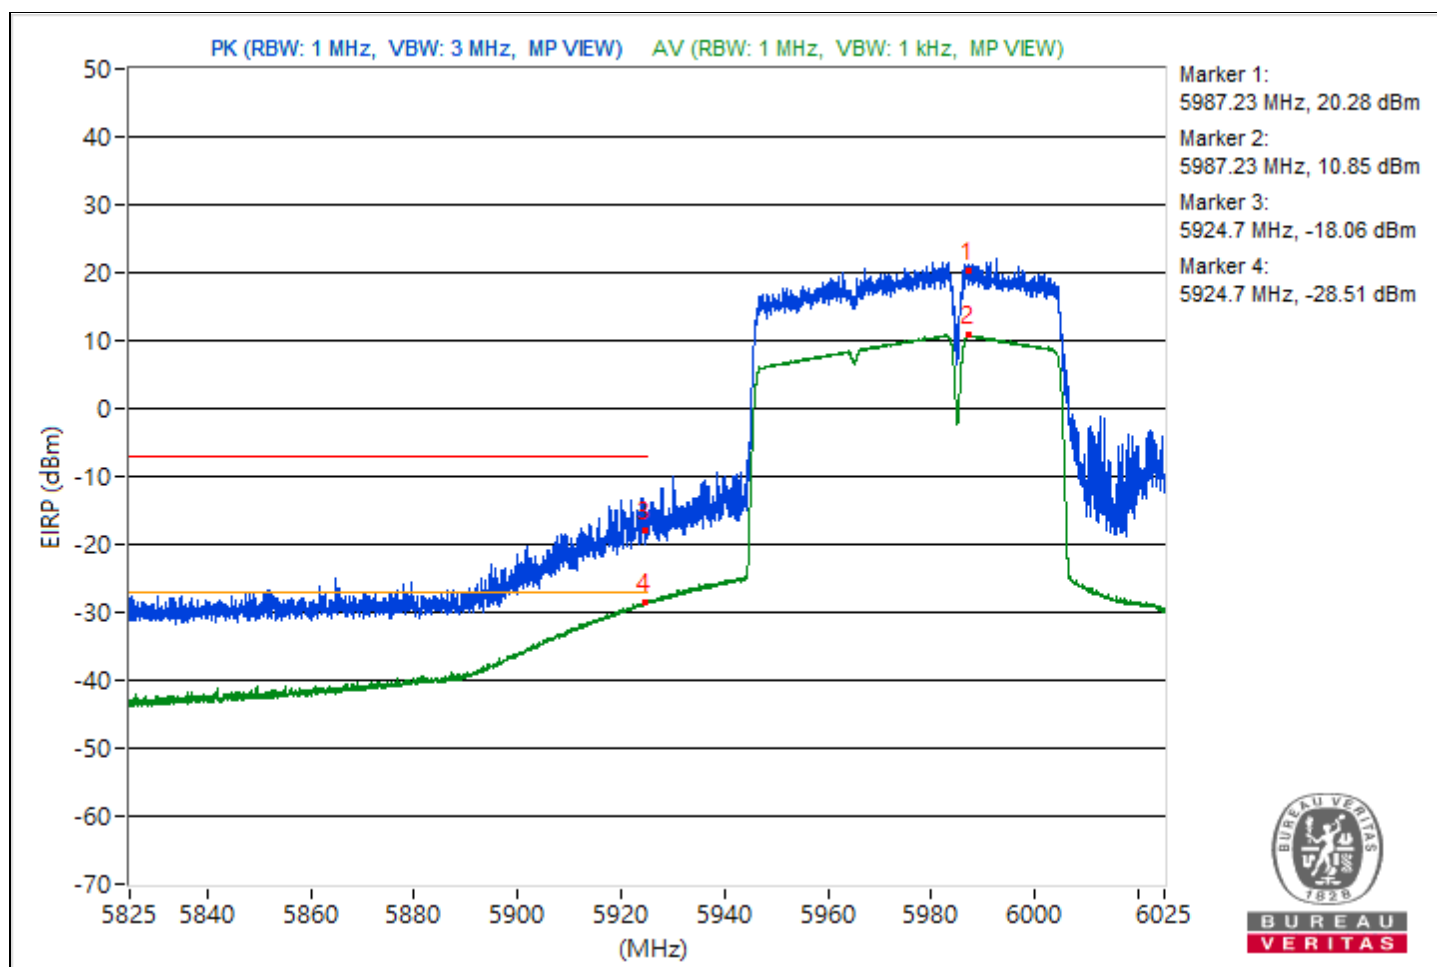


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6787.22	113.33 PK			9.7	8.37	18.07
2	*6787.22	105.86 AV			2.23	8.37	10.6
3	#7197.7	66.03 PK	88.26	-22.23	-37.6	8.37	-29.23
4	#7197.7	53.23 AV	68.26	-15.03	-50.4	8.37	-42.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

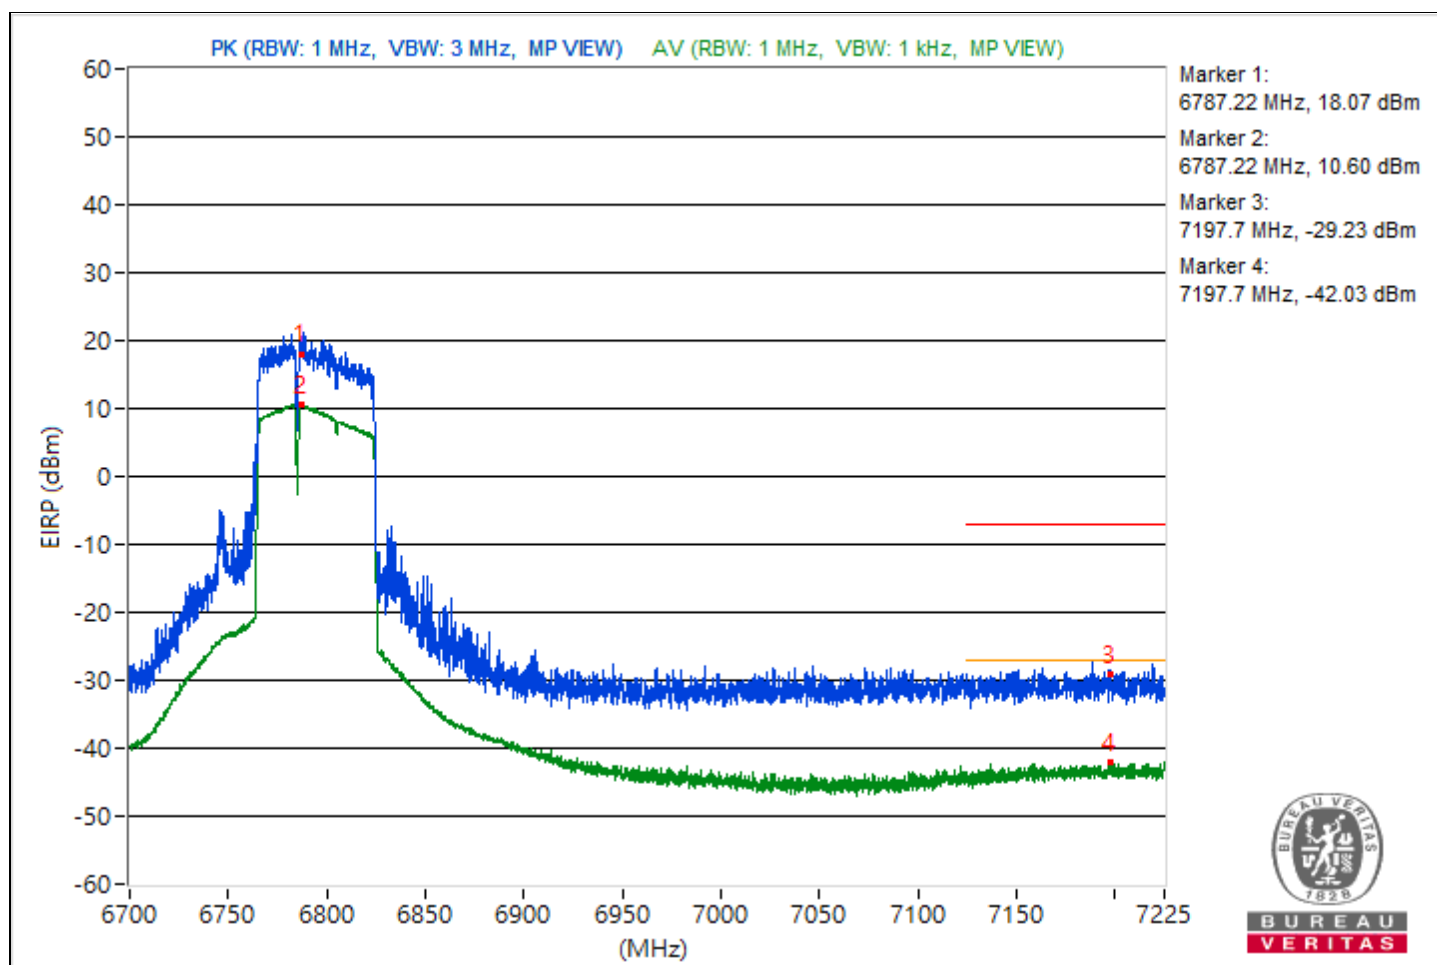


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.62	107.85 PK			4.22	8.37	12.59
2	*6022.62	100.88 AV			-2.75	8.37	5.62
3	#5924.85	70.36 PK	88.26	-17.9	-33.27	8.37	-24.9
4	#5924.85	61.41 AV	68.26	-6.85	-42.22	8.37	-33.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

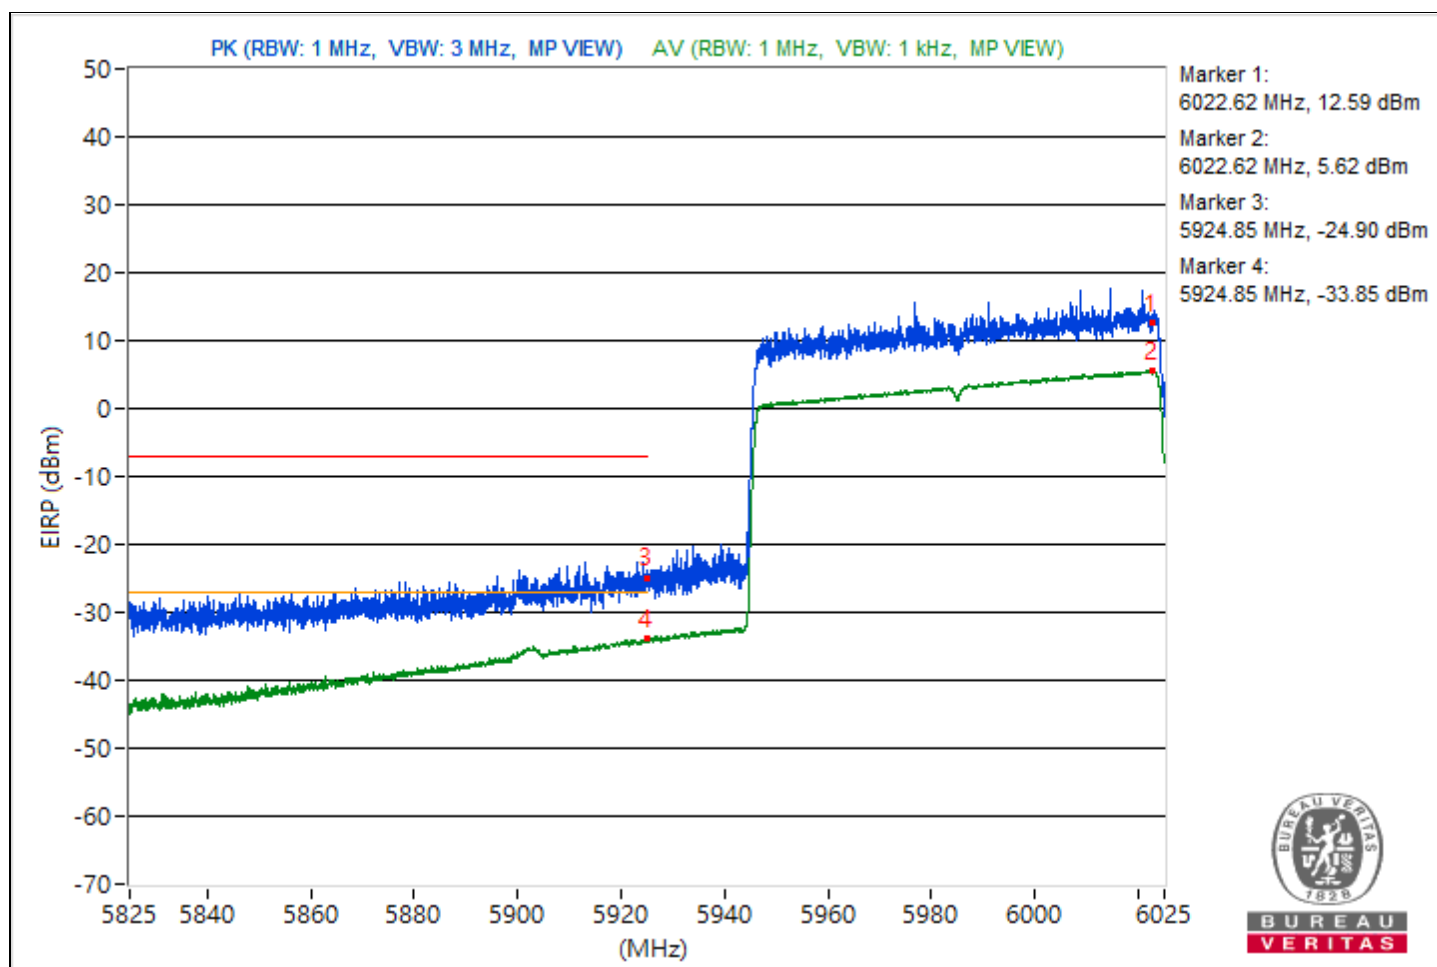


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6700.79	106.47 PK			2.84	8.37	11.21
2	*6700.79	97.86 AV			-5.77	8.37	2.6
3	#7212.01	64.65 PK	88.26	-23.61	-38.98	8.37	-30.61
4	#7212.01	53.34 AV	68.26	-14.92	-50.29	8.37	-41.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

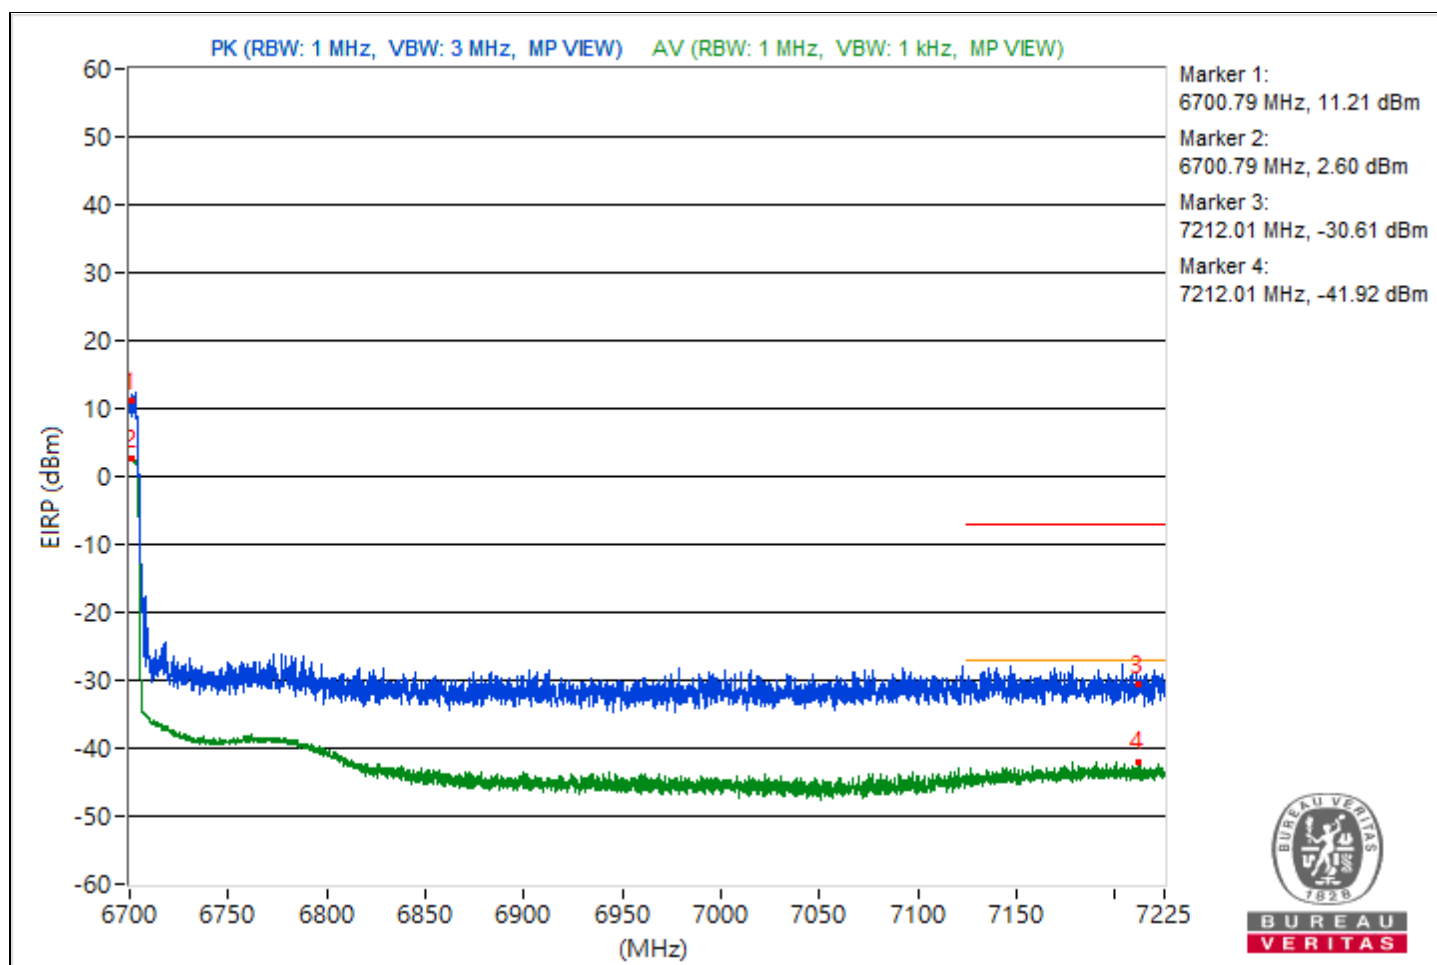


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.25	108.97 PK			5.34	8.37	13.71
2	*6022.25	100.43 AV			-3.2	8.37	5.17
3	#5924	71.69 PK	88.26	-16.57	-31.94	8.37	-23.57
4	#5924	61.79 AV	68.26	-6.47	-41.84	8.37	-33.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

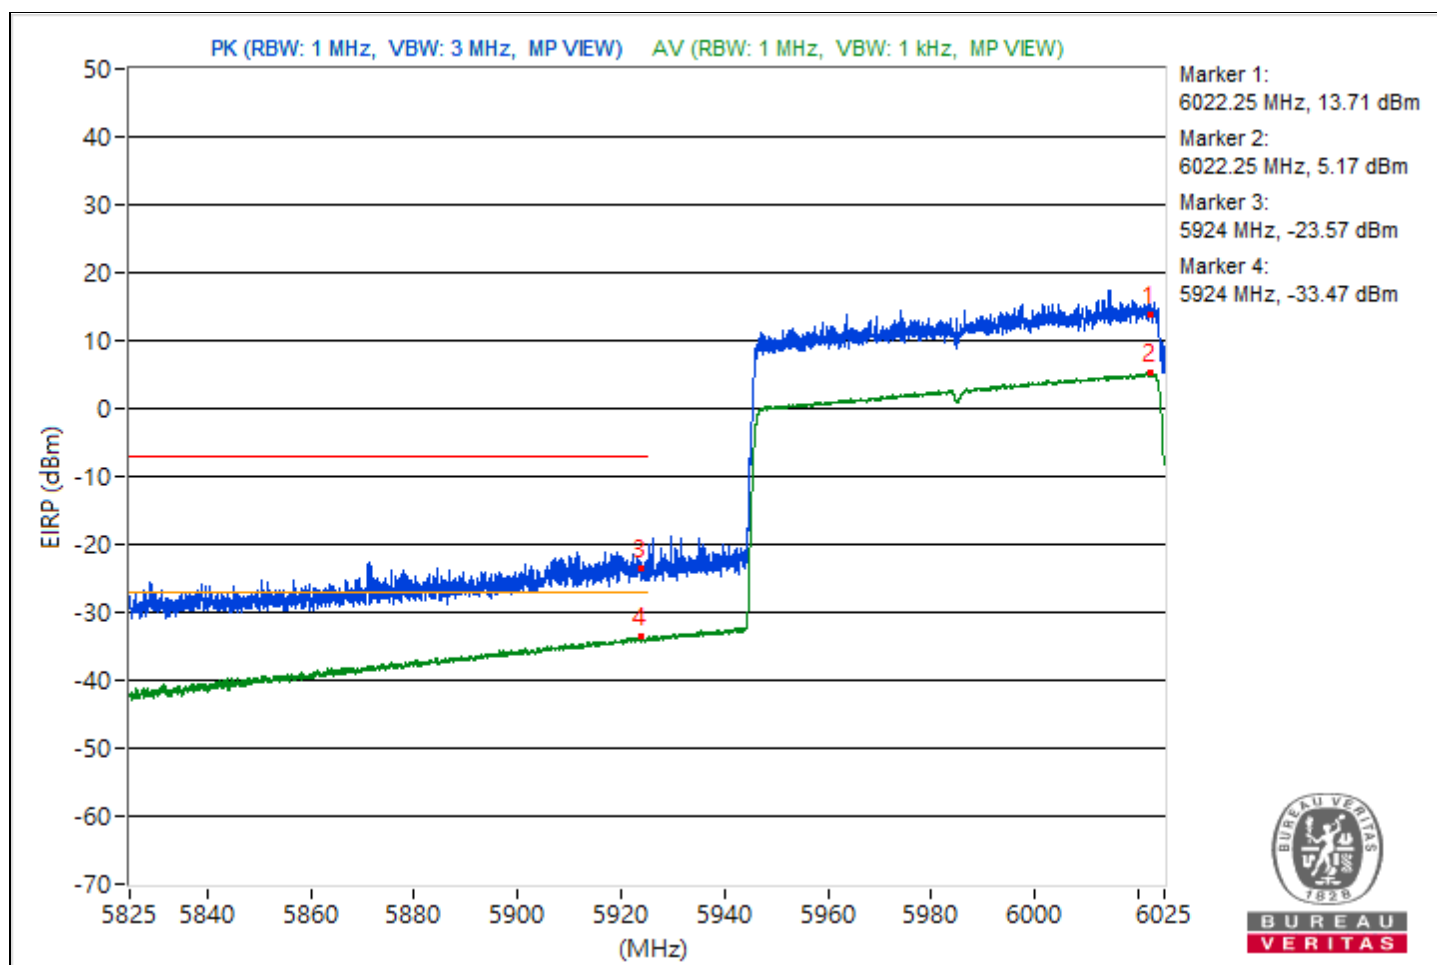


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6700.98	104.77 PK			1.14	8.37	9.51
2	*6700.98	97.35 AV			-6.28	8.37	2.09
3	#7214.5	65.2 PK	88.26	-23.06	-38.43	8.37	-30.06
4	#7214.5	53.4 AV	68.26	-14.86	-50.23	8.37	-41.86

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

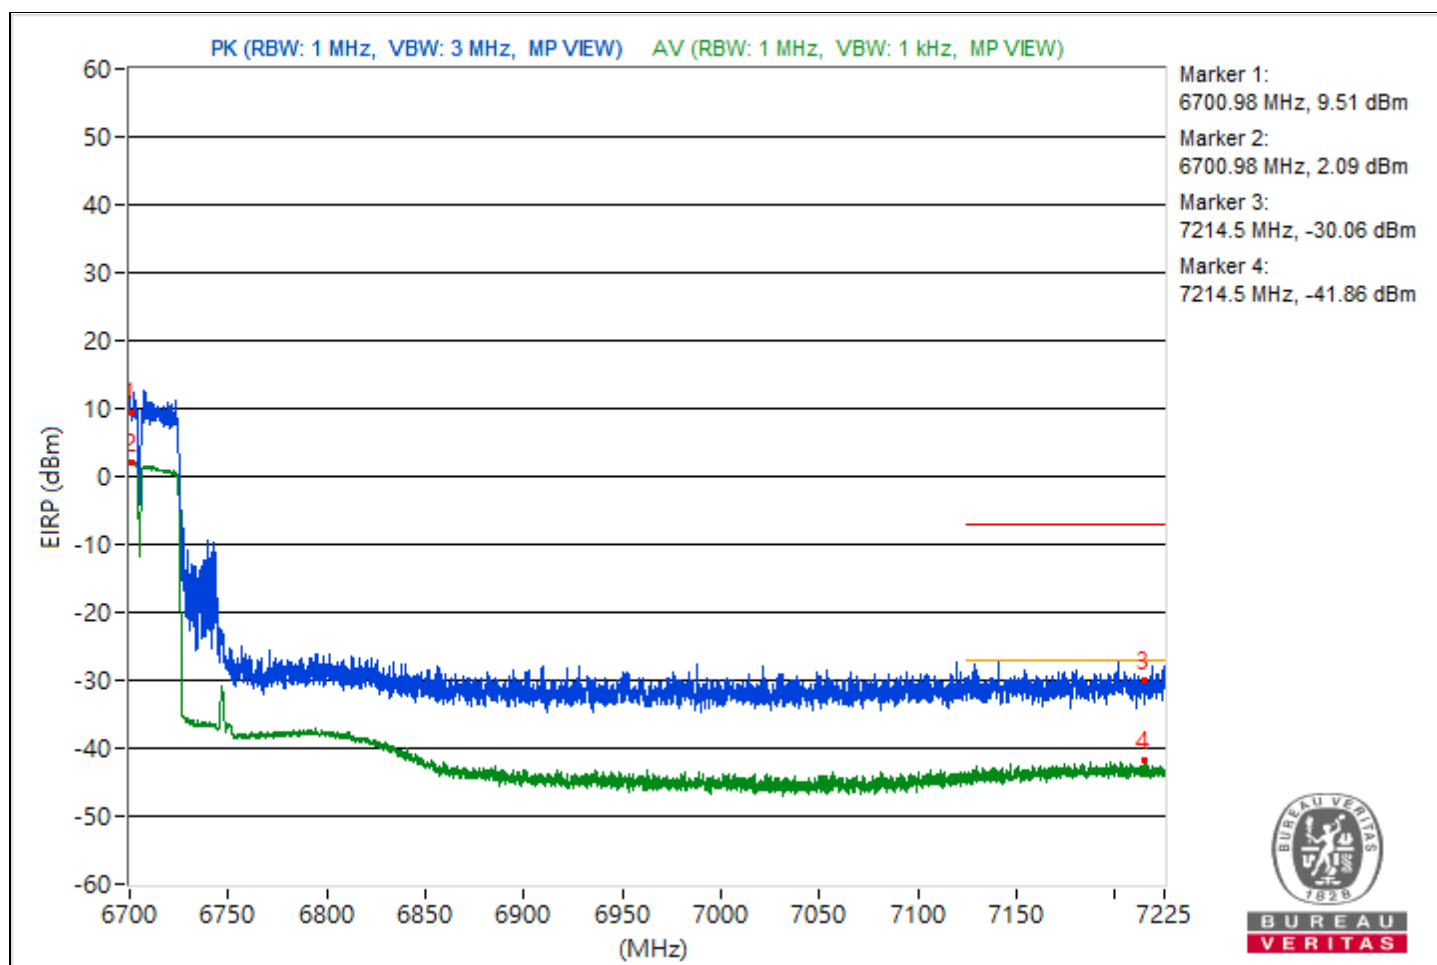


Conducted Unwanted Emissions


2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.08	52.4 PK	74	-21.6	-56.69	-57.89	11.38	-42.86
2	5459.08	45.53 AV	54	-8.47	-64.51	-63.77	11.38	-49.73
3	7251.08	48.63 PK	74	-25.37	-60.57	-61.52	11.38	-46.63
4	7251.08	39.35 AV	54	-14.65	-69.59	-71.14	11.38	-55.91
5	21399	52.93 PK	74	-21.07	-55.97	-57.63	11.38	-42.33
6	21399	39.17 AV	54	-14.83	-73.09	-68.86	11.38	-56.09
7	23974.3	52.86 PK	74	-21.14	-56.93	-56.66	11.38	-42.4
8	23974.3	40.73 AV	54	-13.27	-68.05	-70.01	11.38	-54.53
9	39984.71	43.9 PK	74	-30.1	-66.44	-65.15	11.38	-51.36
10	39984.71	36.14 AV	54	-17.86	-74.51	-72.7	11.38	-59.12

Note: Margin value = Emission Level - Limit value

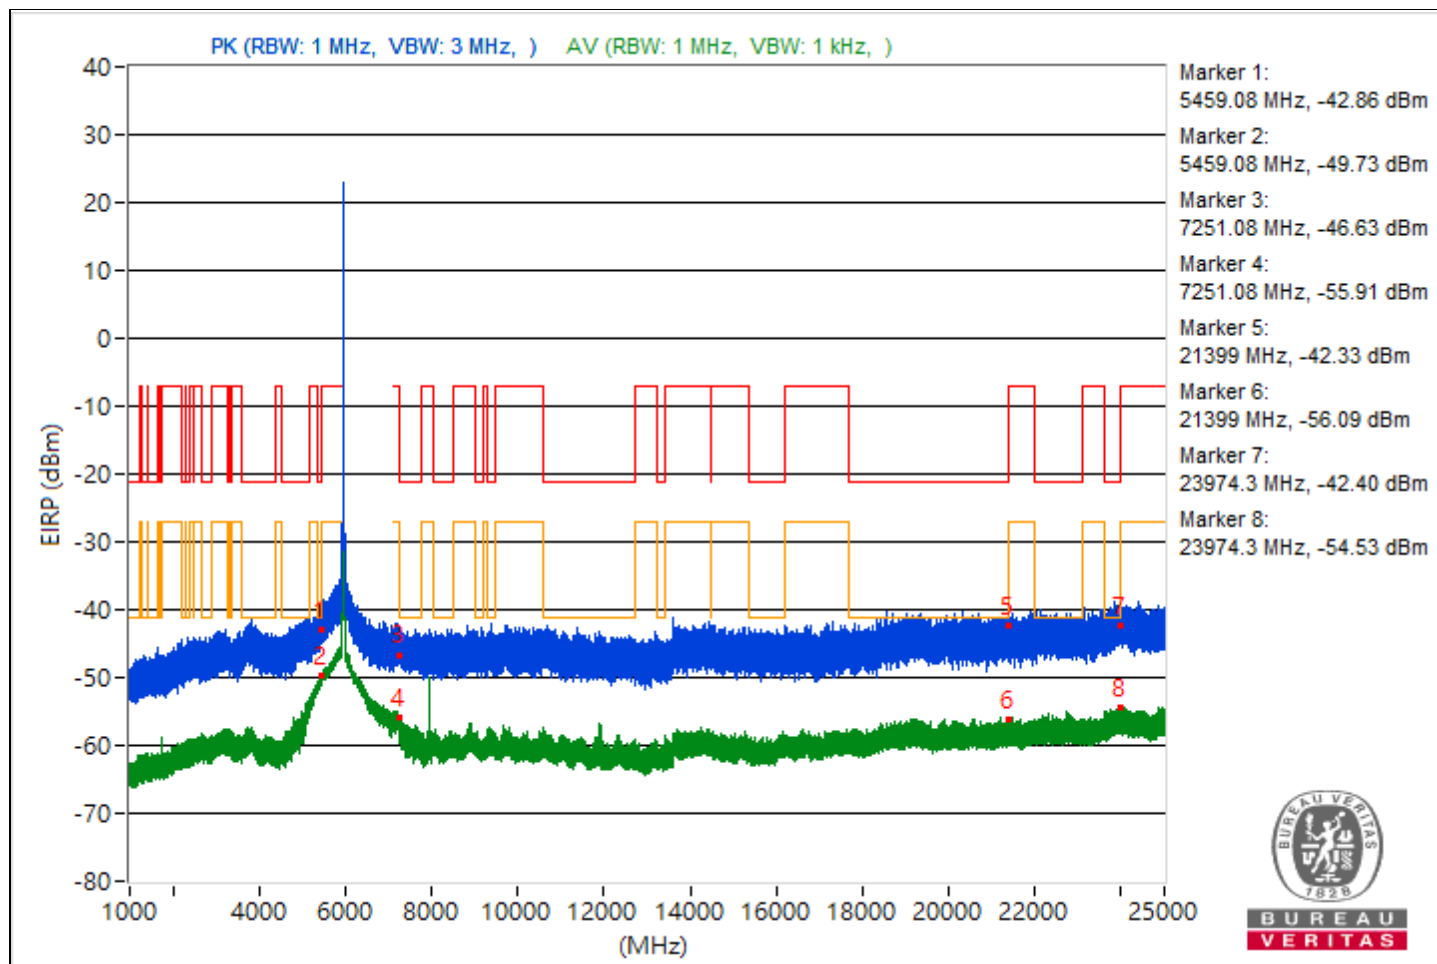


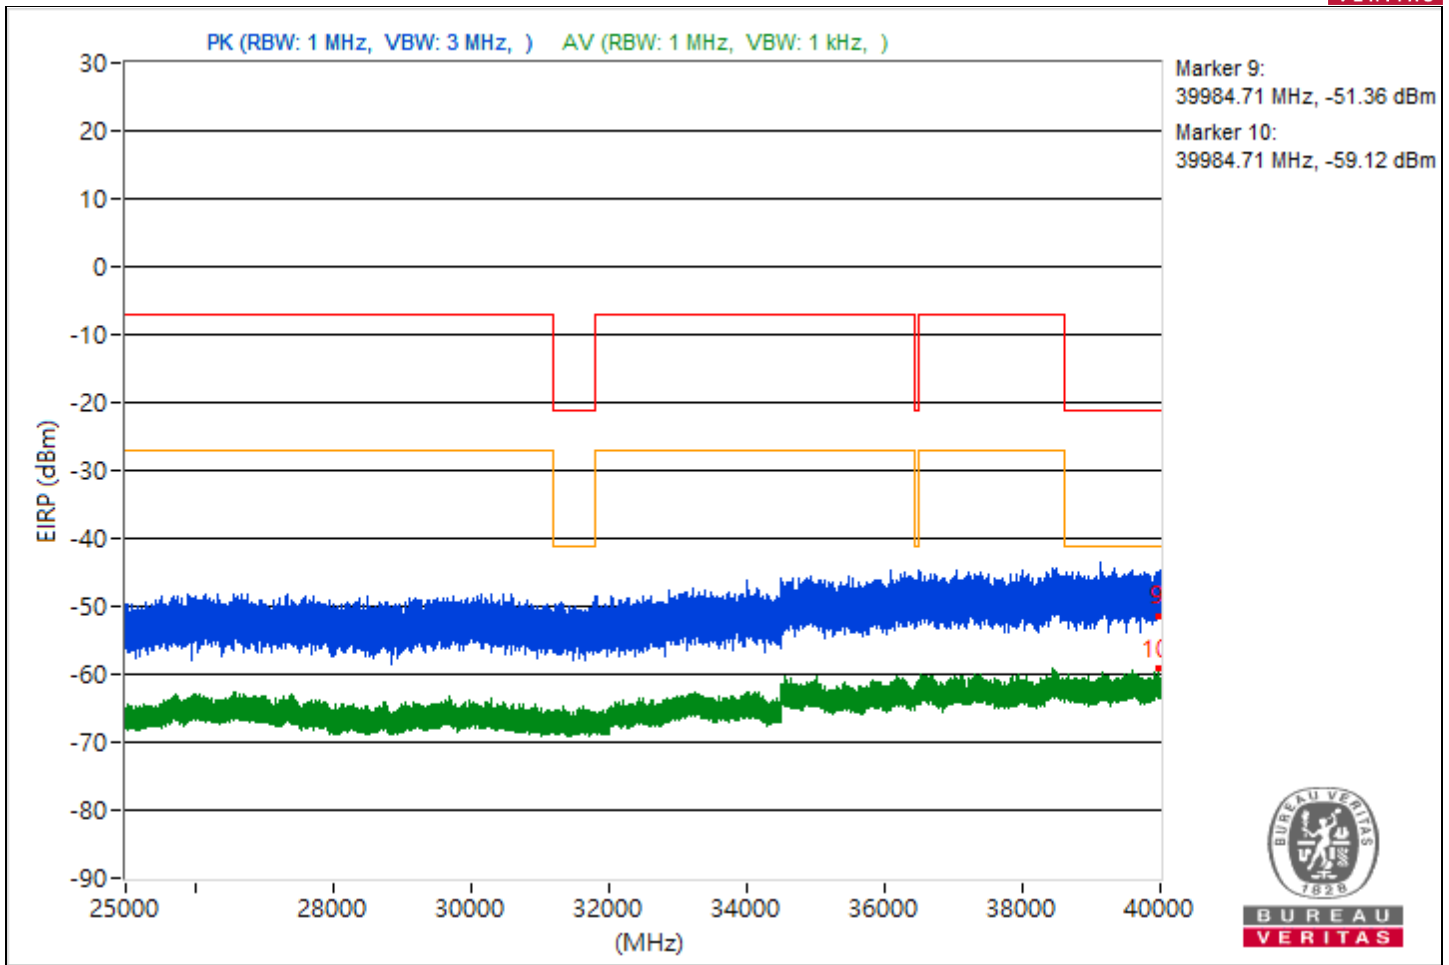


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.48	51.61 PK	74	-22.39	-60.28	-56.56	11.38	-43.65
2	5453.48	44.64 AV	54	-9.36	-64.94	-65.08	11.38	-50.62
3	8233.42	51.69 PK	74	-22.31	-56.8	-59.53	11.38	-43.57
4	8233.42	44.56 AV	54	-9.44	-64.31	-66.04	11.38	-50.7
5	19127.1	51.79 PK	74	-22.21	-57.99	-57.74	11.38	-43.47
6	19127.1	39.36 AV	54	-14.64	-69.91	-70.7	11.38	-55.9
7	23889.4	51.8 PK	74	-22.2	-57.23	-58.57	11.38	-43.46
8	23889.4	40.81 AV	54	-13.19	-70.76	-67.51	11.38	-54.45
9	39947.82	46.72 PK	74	-27.28	-62.32	-63.65	11.38	-48.54
10	39947.82	35.29 AV	54	-18.71	-76.65	-72.86	11.38	-59.97

Note: Margin value = Emission Level - Limit value

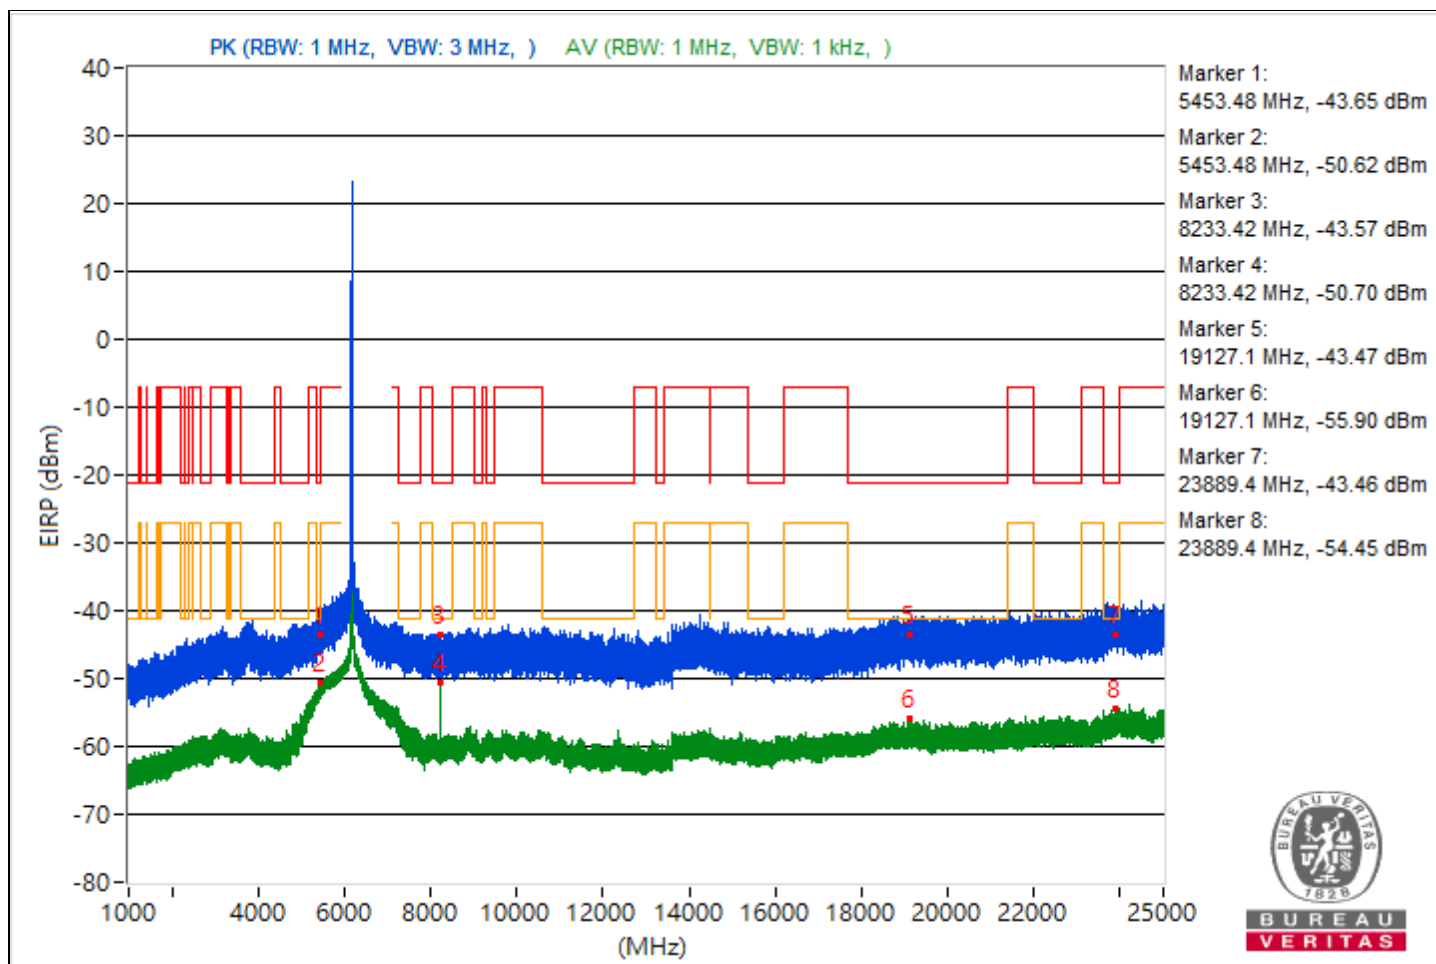


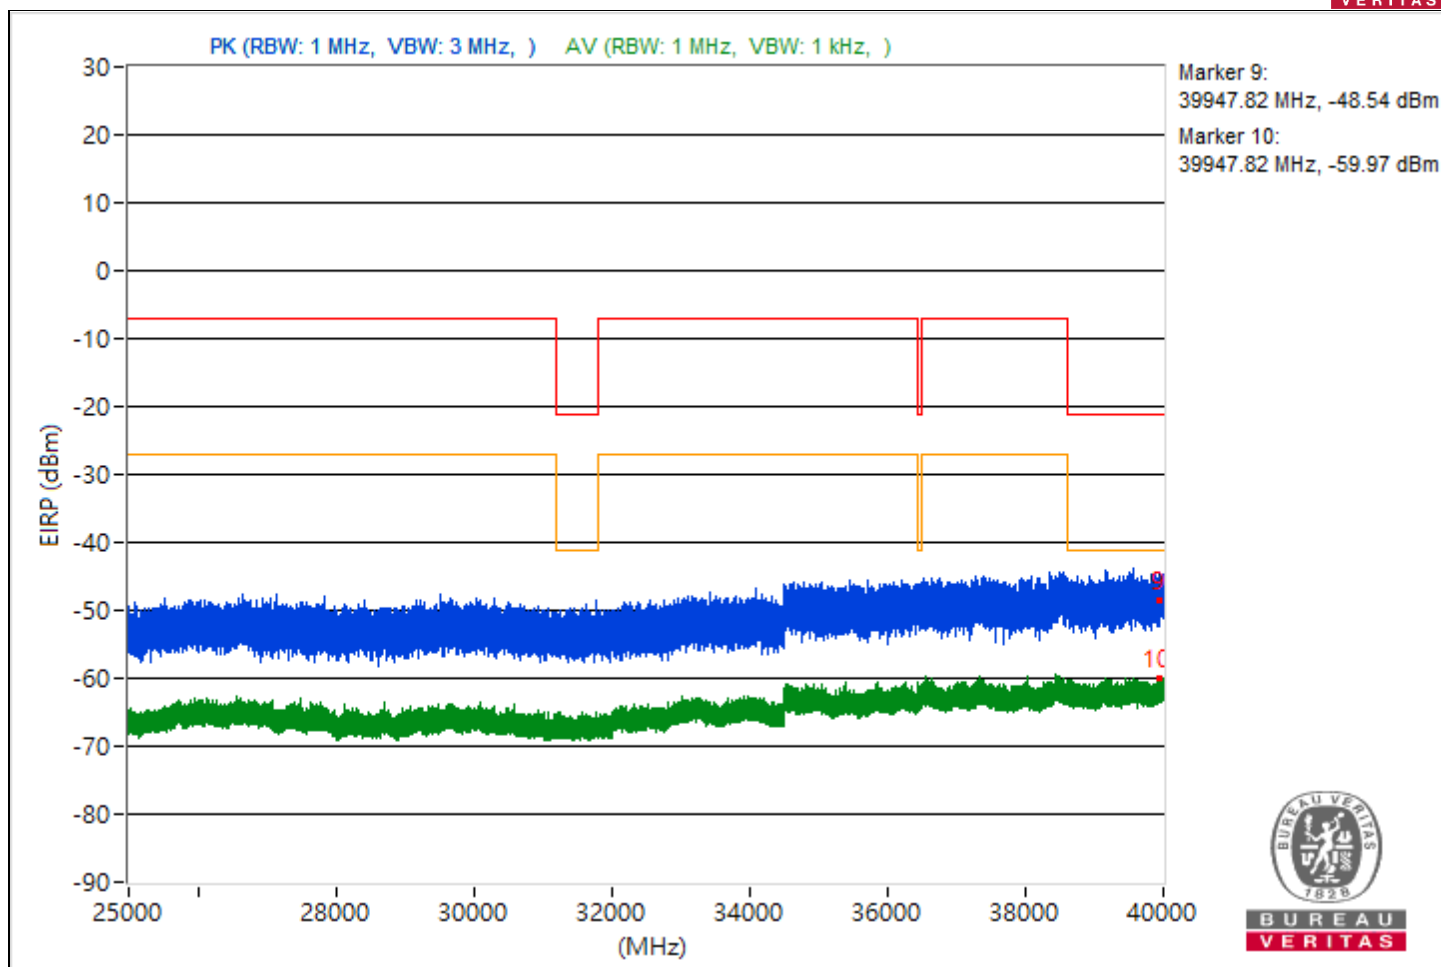


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5445.08	51.85 PK	74	-22.15	-57.57	-58.04	11.38	-43.41
2	5445.08	43.34 AV	54	-10.66	-67.07	-65.67	11.38	-51.92
3	7253.18	50.86 PK	74	-23.14	-58.75	-58.83	11.38	-44.4
4	7253.18	41.02 AV	54	-12.98	-69.63	-67.82	11.38	-54.24
5	20707.3	49.92 PK	74	-24.08	-60.36	-59.17	11.38	-45.34
6	20707.3	38.78 AV	54	-15.22	-73.56	-69.22	11.38	-56.48
7	23966.7	52.87 PK	74	-21.13	-56.55	-57.02	11.38	-42.39
8	23966.7	40.63 AV	54	-13.37	-70.58	-67.87	11.38	-54.63
9	39653.96	47.99 PK	74	-26.01	-60.65	-62.97	11.38	-47.27
10	39653.96	36.26 AV	54	-17.74	-75.87	-71.82	11.38	-59

Note: Margin value = Emission Level - Limit value

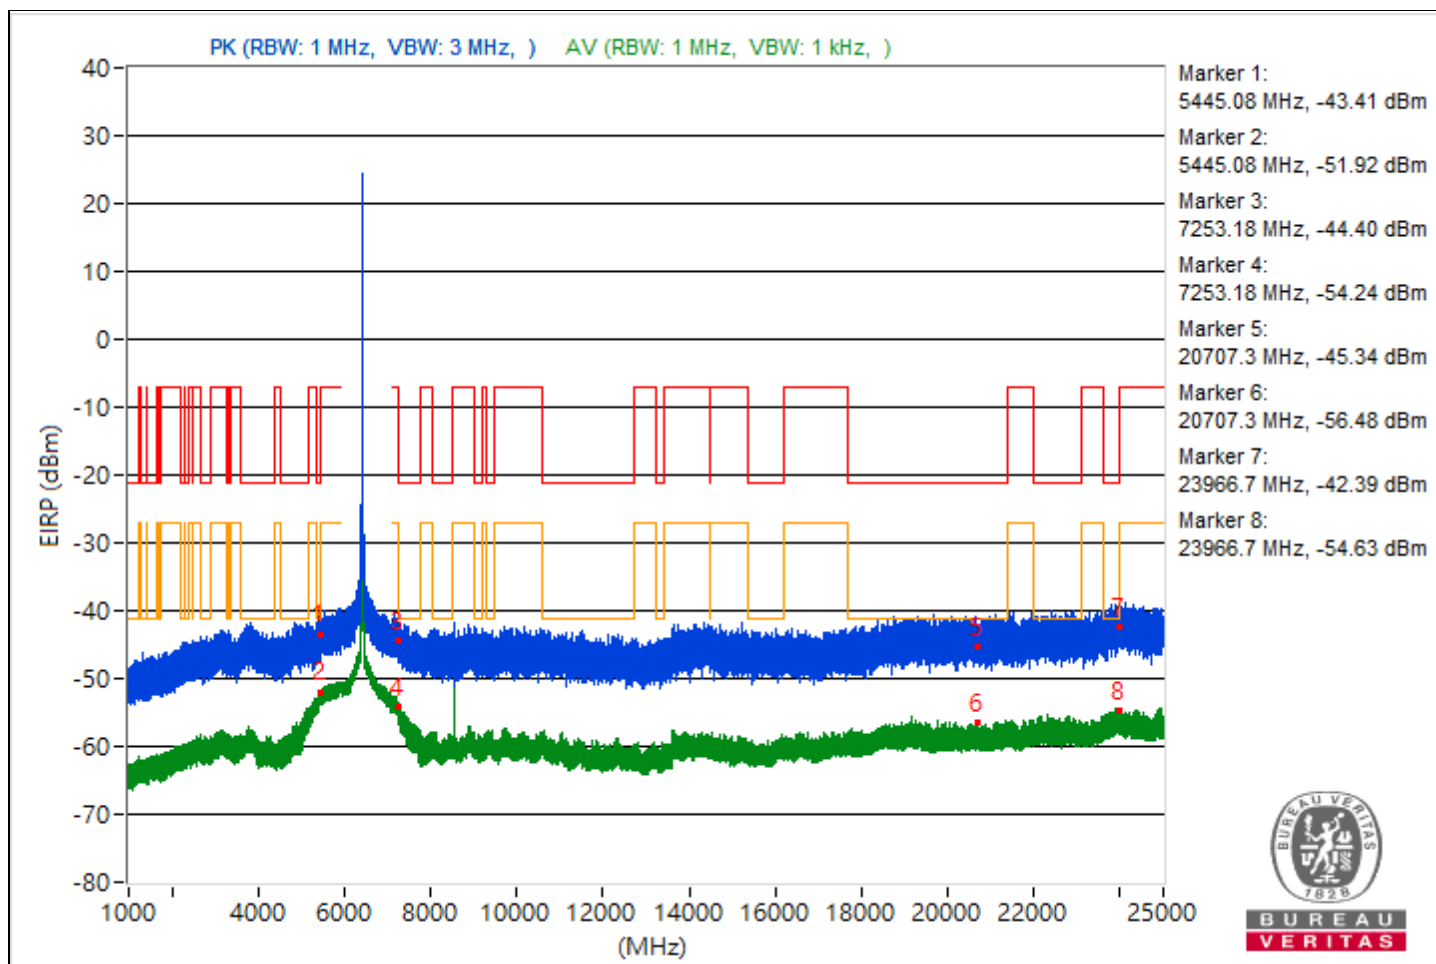


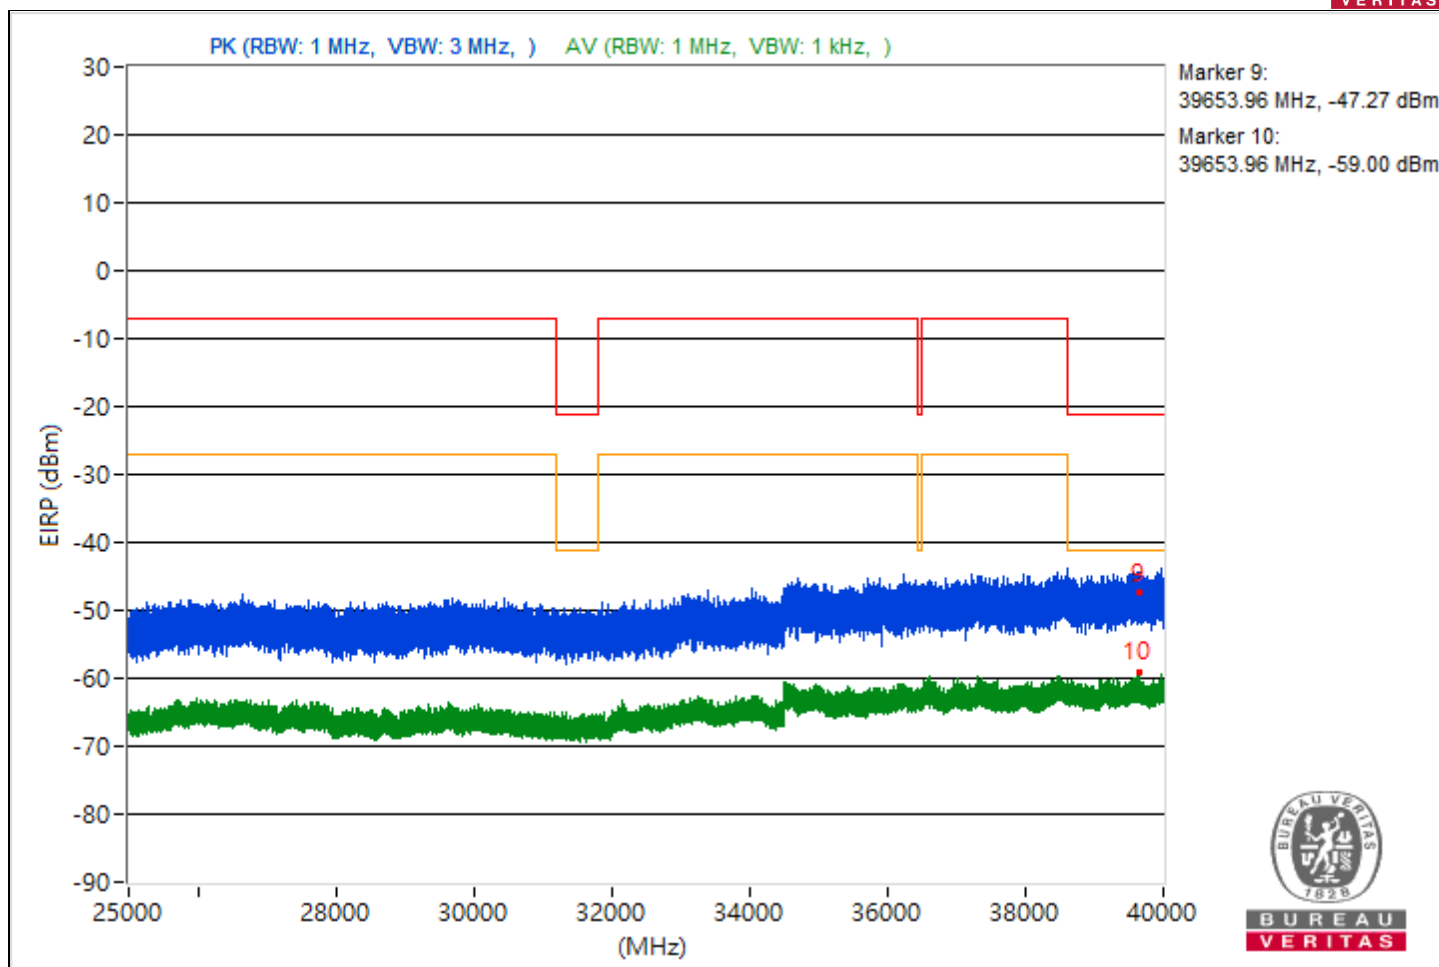


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.58	50.46 PK	74	-23.54	-59.65	-58.78	11.38	-44.8
2	5455.58	41.97 AV	54	-12.03	-68.41	-67.05	11.38	-53.29
3	7251.08	48.81 PK	74	-25.19	-61.12	-60.58	11.38	-46.45
4	7251.08	41.71 AV	54	-12.29	-67.73	-68.17	11.38	-53.55
5	19218	49.56 PK	74	-24.44	-59.59	-60.66	11.38	-45.7
6	19218	38.63 AV	54	-15.37	-73.88	-69.31	11.38	-56.63
7	23931.9	54.46 PK	74	-19.54	-55.53	-54.87	11.38	-40.8
8	23931.9	41.4 AV	54	-12.6	-68.48	-68.02	11.38	-53.86
9	39603.02	47.61 PK	74	-26.39	-63.04	-61.22	11.38	-47.65
10	39603.02	35.91 AV	54	-18.09	-75.73	-72.38	11.38	-59.35

Note: Margin value = Emission Level - Limit value

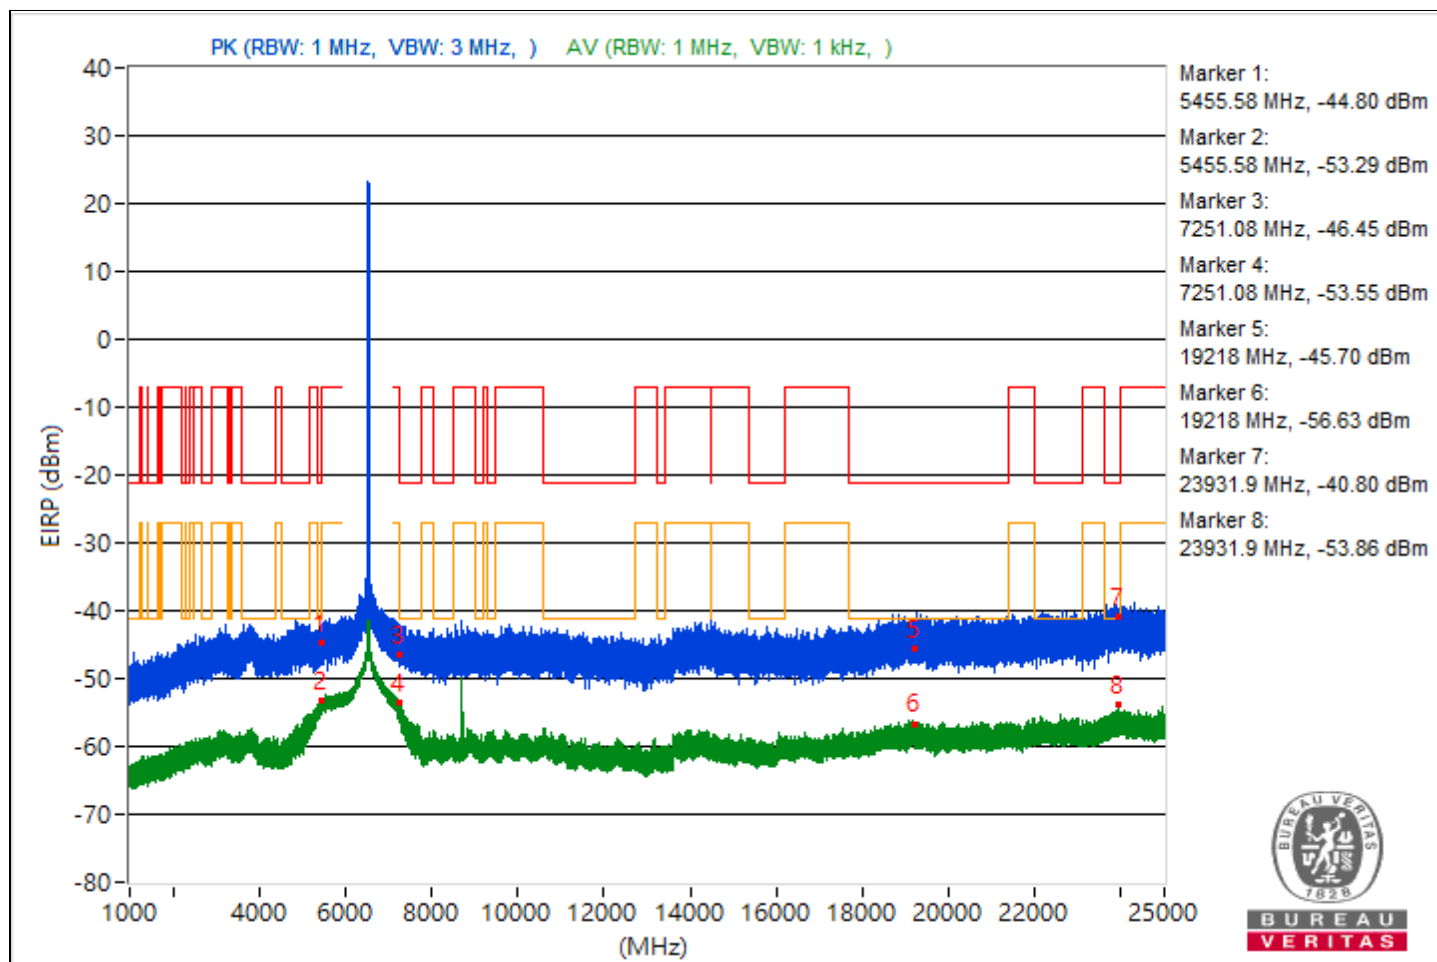


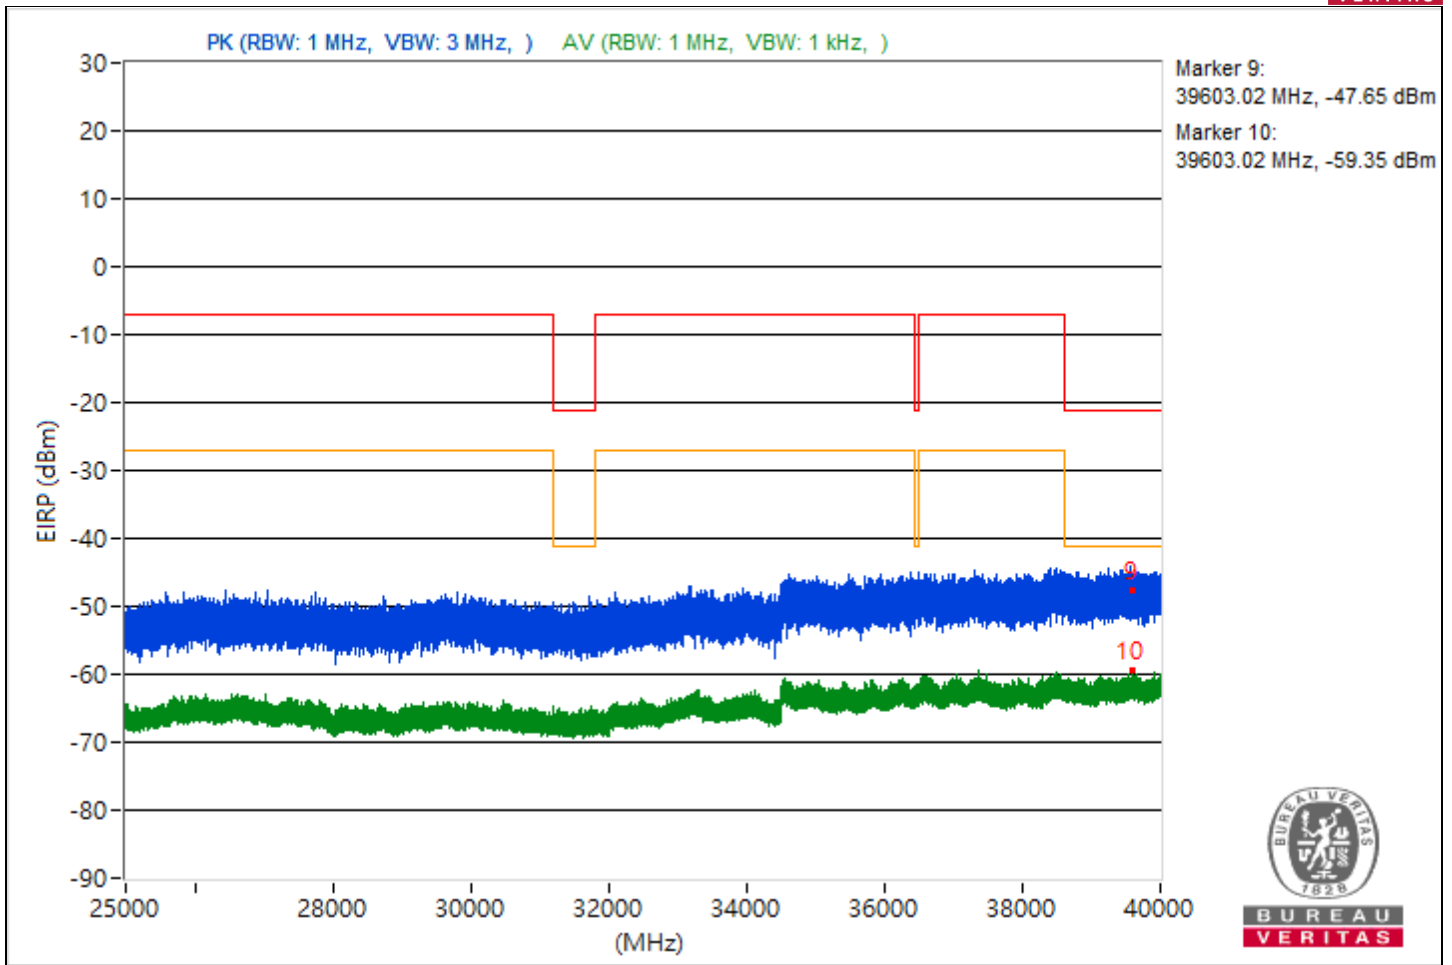


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.07	50.32 PK	74	-23.68	-58.53	-60.3	11.38	-44.94
2	5451.07	41.64 AV	54	-12.36	-67.71	-68.33	11.38	-53.62
3	7251.78	51.39 PK	74	-22.61	-57.04	-59.95	11.38	-43.87
4	7251.78	42.67 AV	54	-11.33	-66.48	-67.56	11.38	-52.59
5	20204.6	50.17 PK	74	-23.83	-58.38	-60.96	11.38	-45.09
6	20204.6	38.56 AV	54	-15.44	-74.4	-69.24	11.38	-56.7
7	23998.4	50.45 PK	74	-23.55	-60.45	-58.24	11.38	-44.81
8	23998.4	40.55 AV	54	-13.45	-67.55	-71.53	11.38	-54.71
9	39149.78	44.96 PK	74	-29.04	-65.62	-63.92	11.38	-50.3
10	39149.78	35.29 AV	54	-18.71	-77.42	-72.58	11.38	-59.97

Note: Margin value = Emission Level - Limit value

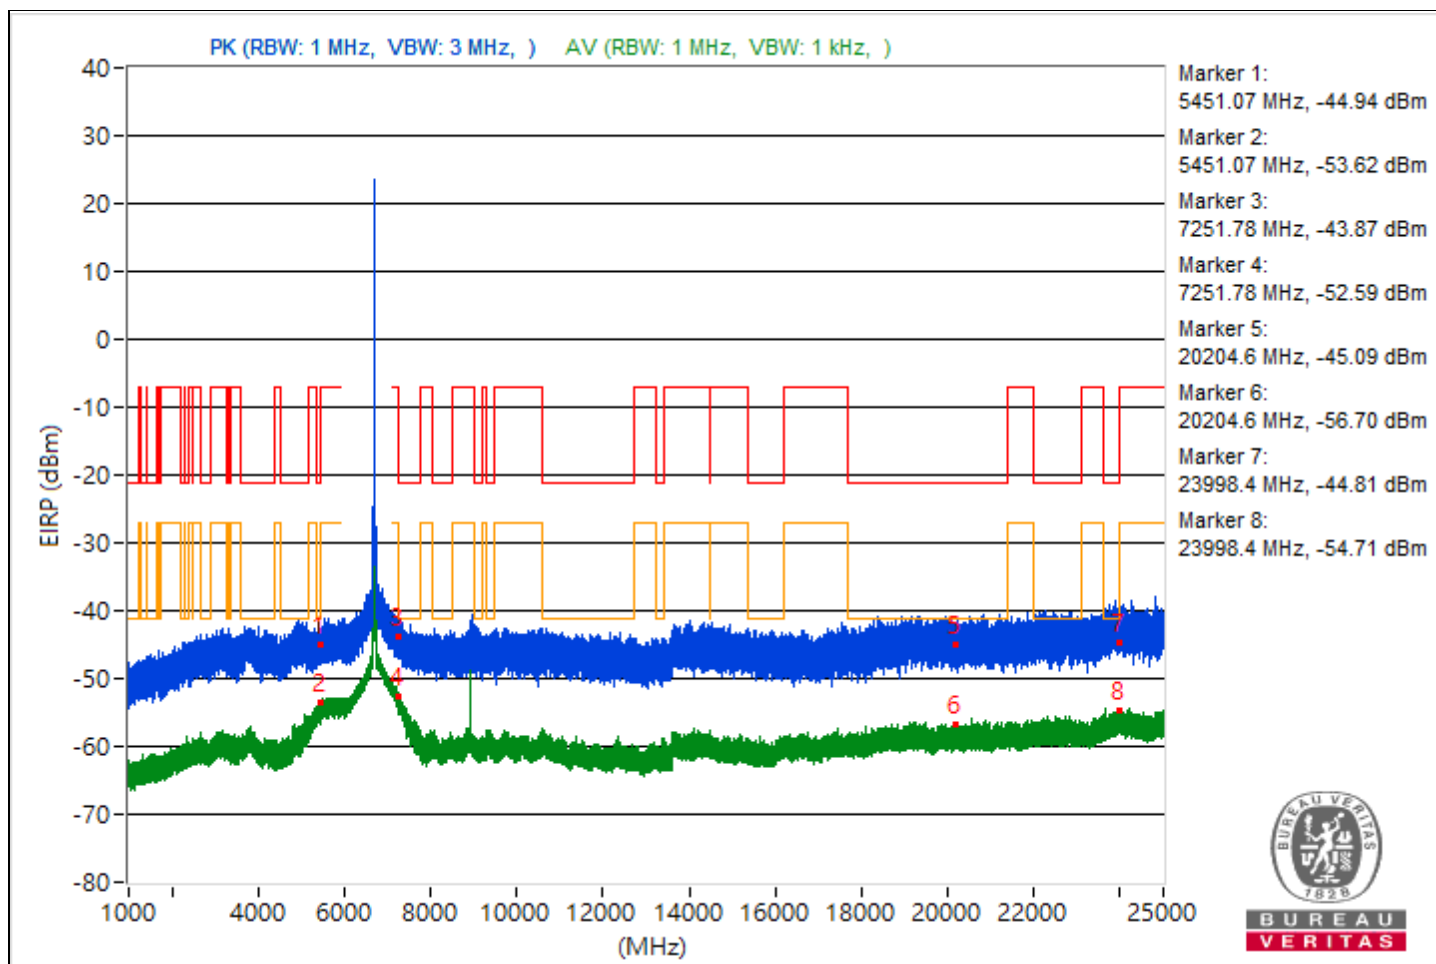


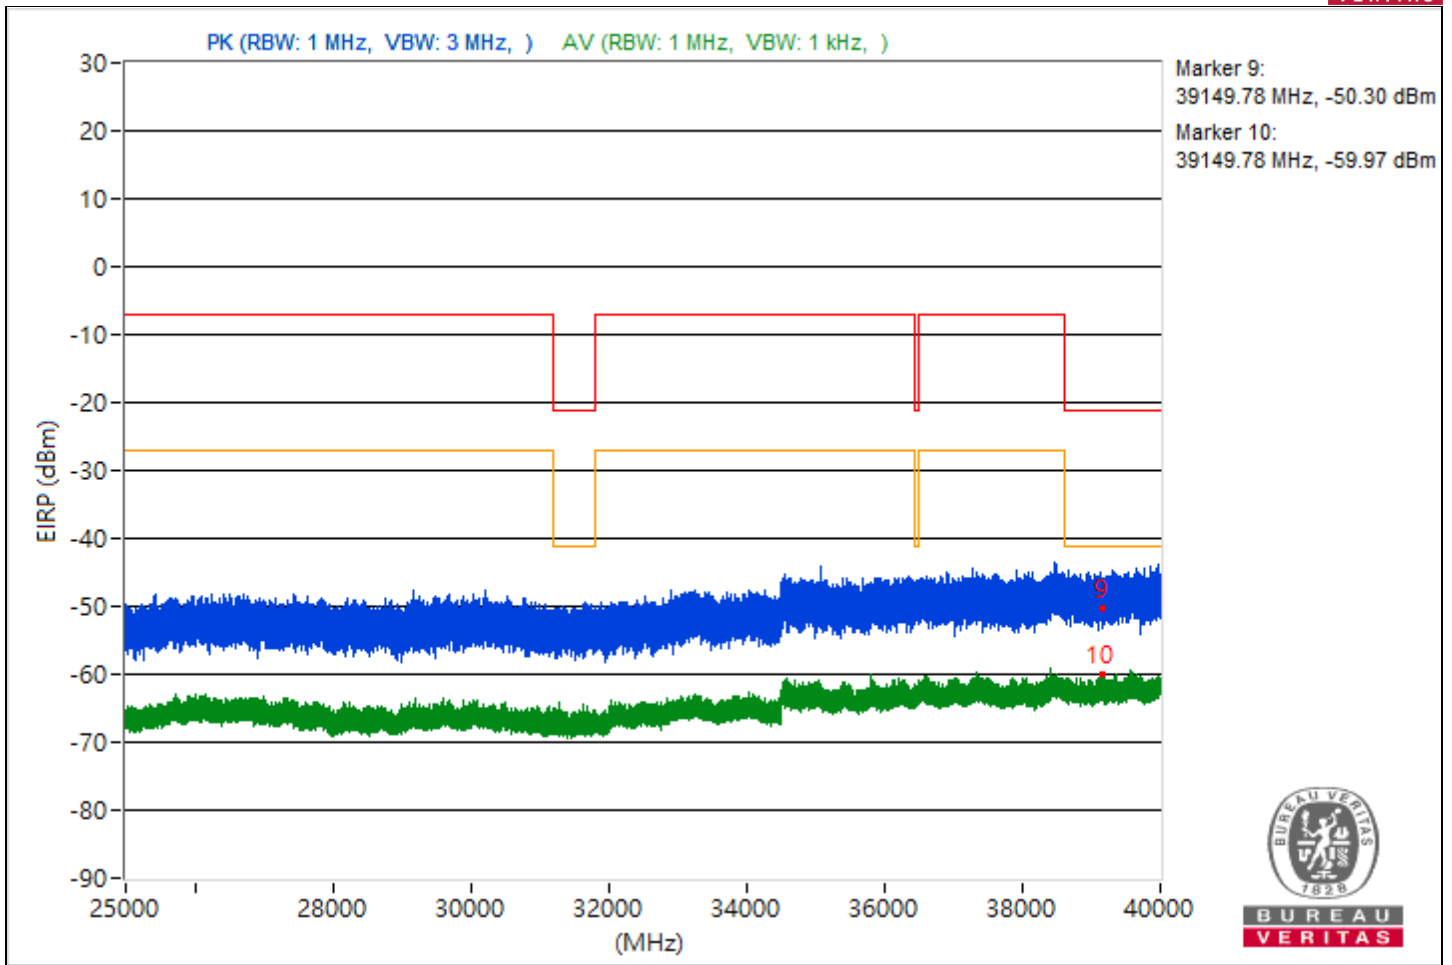


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.24	50.16 PK	74	-23.84	-60.47	-58.7	11.38	-45.1
2	5446.24	41.38 AV	54	-12.62	-68.41	-68.14	11.38	-53.88
3	9140	52.35 PK	74	-21.65	-57.65	-56.98	11.38	-42.91
4	9140	44.57 AV	54	-9.43	-63.59	-67.37	11.38	-50.69
5	21116.8	49.98 PK	74	-24.02	-58.67	-60.97	11.38	-45.28
6	21116.8	39.43 AV	54	-14.57	-71.66	-69.14	11.38	-55.83
7	23946.9	52.59 PK	74	-21.41	-55.74	-58.98	11.38	-42.67
8	23946.9	40.56 AV	54	-13.44	-71.6	-67.5	11.38	-54.7
9	39710.84	48.21 PK	74	-25.79	-61.58	-61.31	11.38	-47.05
10	39710.84	35.17 AV	54	-18.83	-77.44	-72.74	11.38	-60.09

Note: Margin value = Emission Level - Limit value

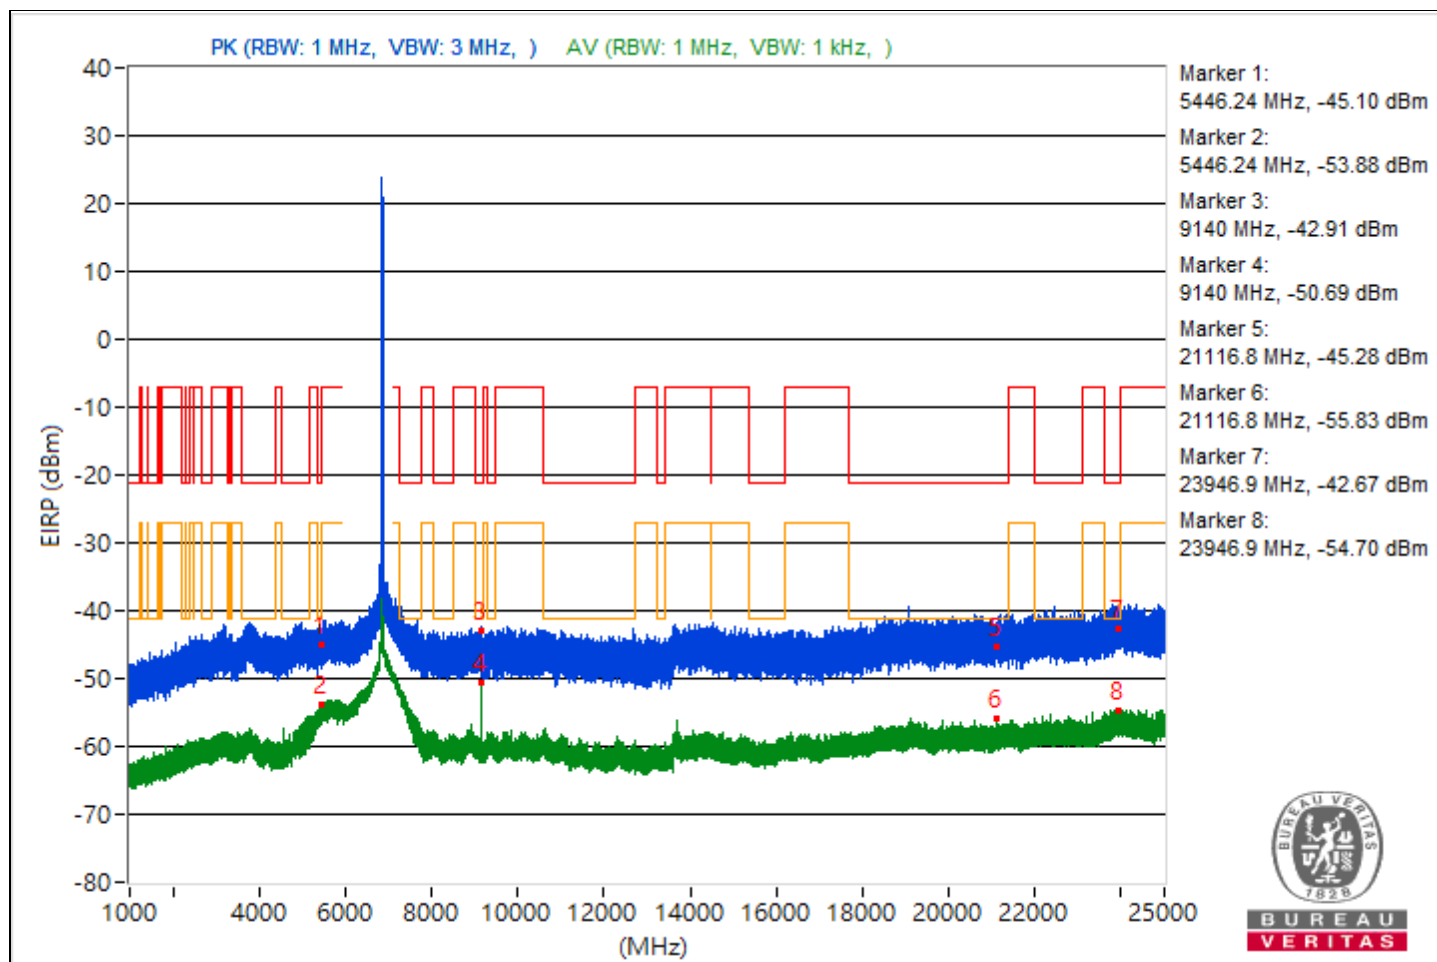

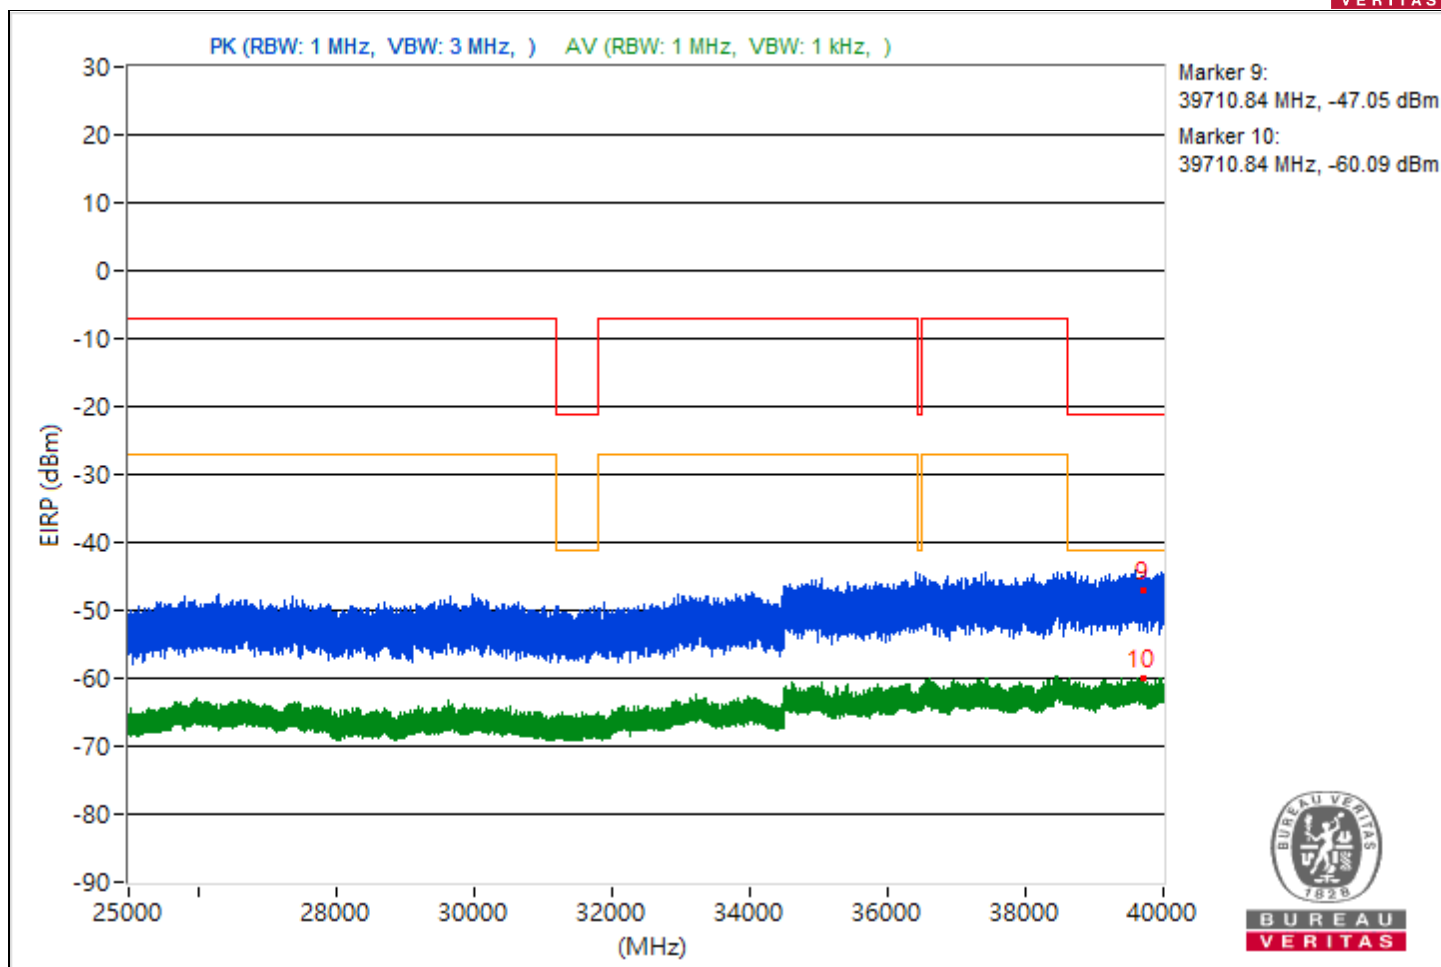



2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.79	50.11 PK	74	-23.89	-55.89	-57.27	8.37	-45.15
2	5446.79	42.32 AV	54	-11.68	-64.27	-64.36	8.37	-52.94
3	11907.73	47.83 PK	74	-26.17	-60.9	-57.4	8.37	-47.43
4	11907.73	39.87 AV	54	-14.13	-65.91	-67.84	8.37	-55.39
5	20524.8	46.72 PK	74	-27.28	-58.37	-62.36	8.37	-48.54
6	20524.8	35.84 AV	54	-18.16	-74.21	-68.92	8.37	-59.42
7	23967.4	48.78 PK	74	-25.22	-56.75	-59.37	8.37	-46.48
8	23967.4	37.6 AV	54	-16.4	-70.93	-67.73	8.37	-57.66
9	39606.31	43 PK	74	-31	-64.61	-62.86	8.37	-52.26
10	39606.31	31.95 AV	54	-22.05	-77.74	-72.92	8.37	-63.31

Note: Margin value = Emission Level - Limit value

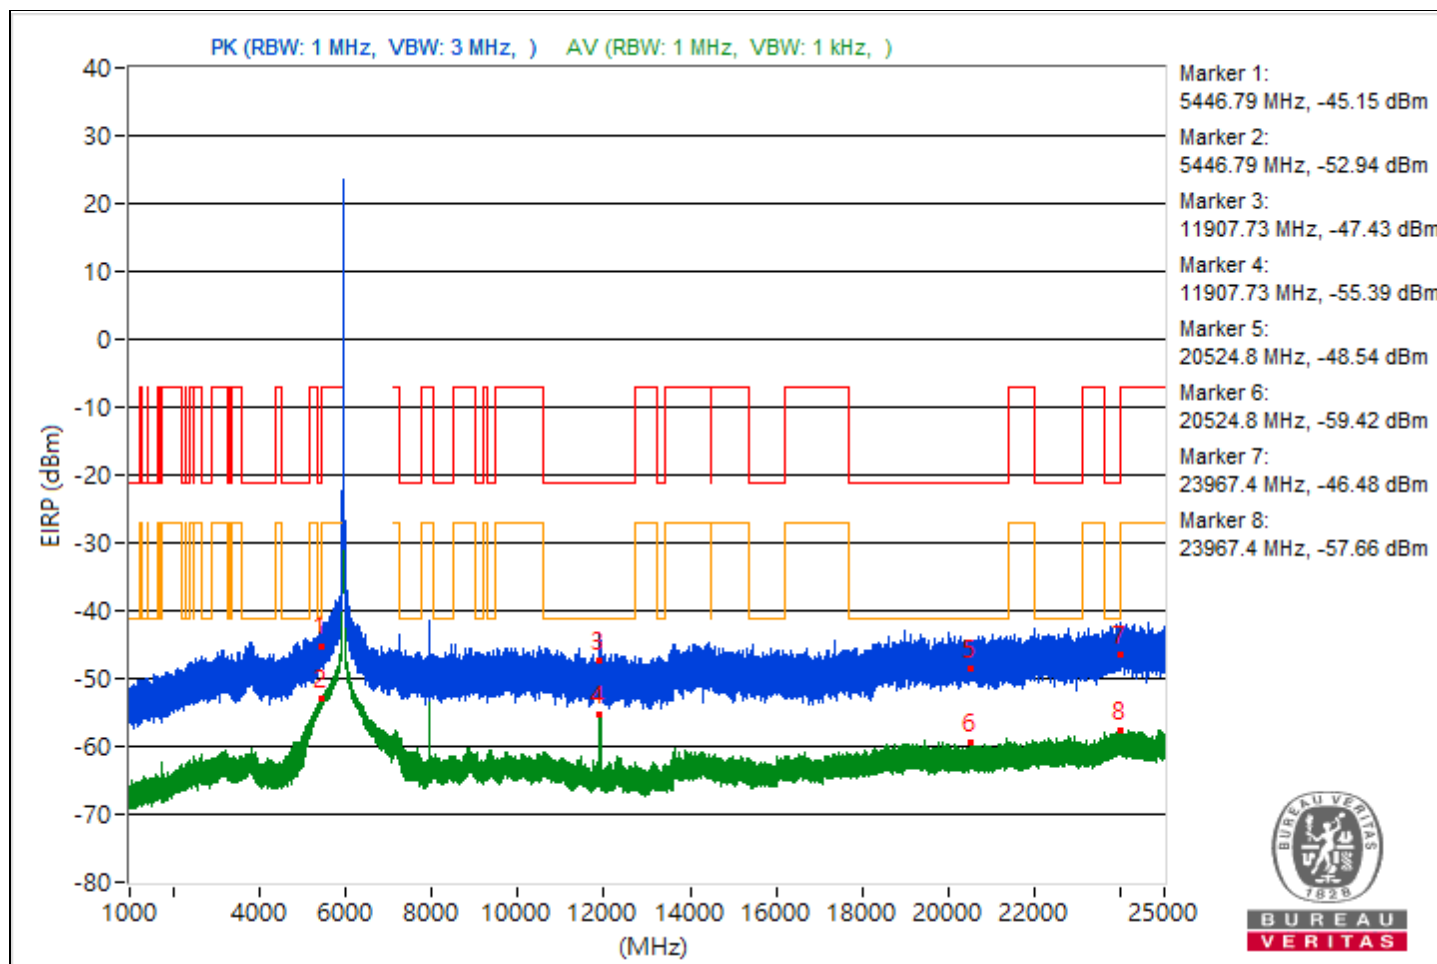


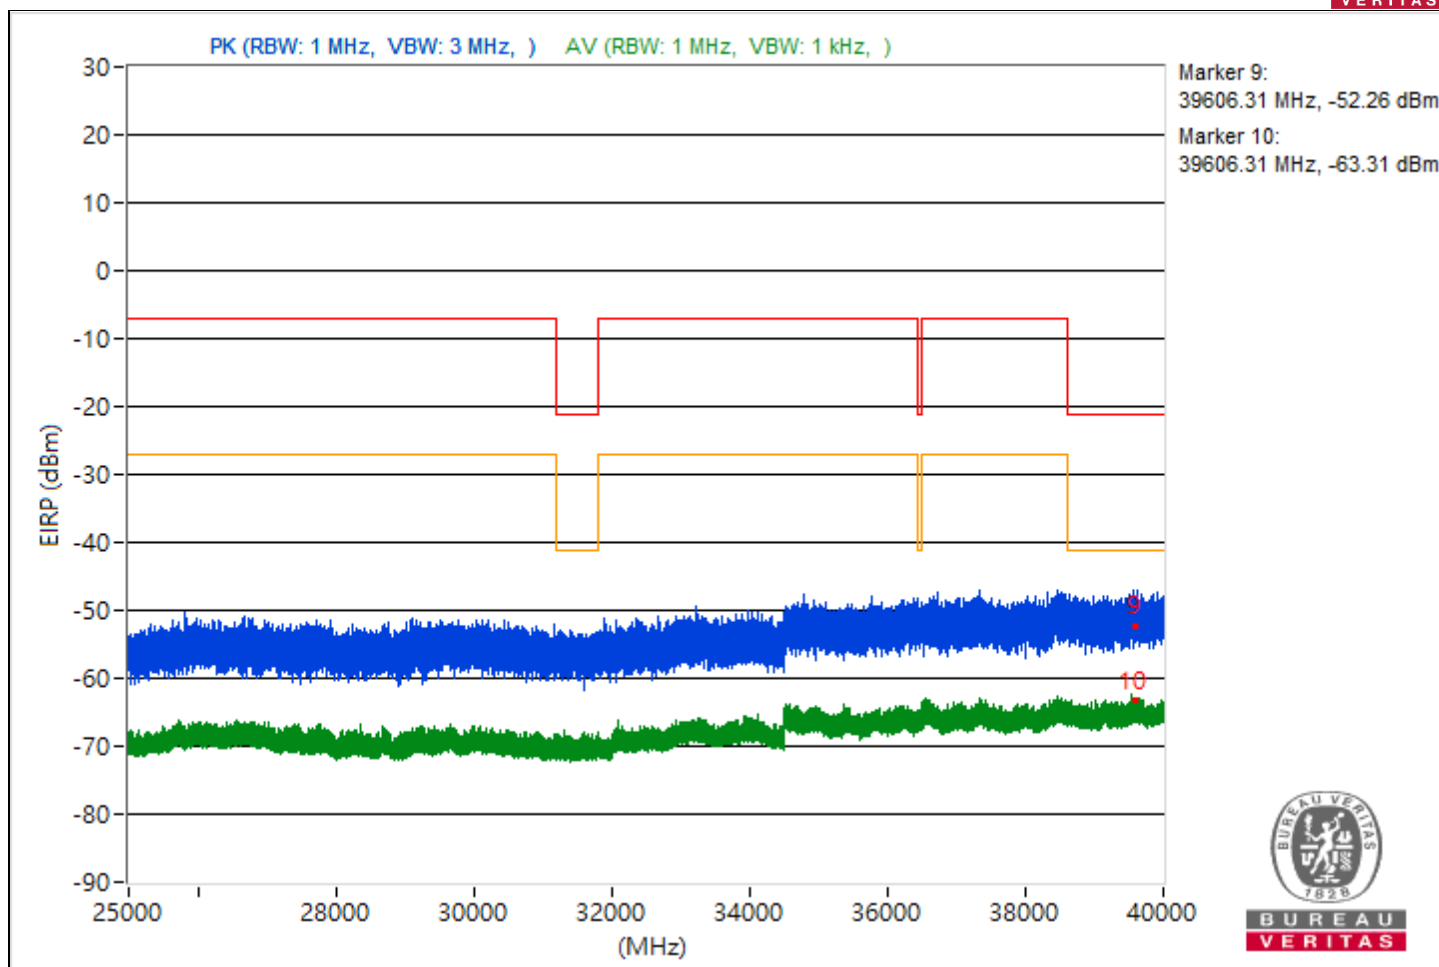


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5452.54	47.35 PK	74	-26.65	-58.34	-60.51	8.37	-47.91
2	5452.54	41.18 AV	54	-12.82	-65.92	-65.04	8.37	-54.08
3	8233.33	50.81 PK	74	-23.19	-54.24	-58.36	8.37	-44.45
4	8233.33	46.97 AV	54	-7.03	-56.93	-68.99	8.37	-48.29
5	19215.3	45.66 PK	74	-28.34	-60.74	-61.24	8.37	-49.6
6	19215.3	35.49 AV	54	-18.51	-69.45	-73.97	8.37	-59.77
7	23782.7	48.28 PK	74	-25.72	-59.13	-57.71	8.37	-46.98
8	23782.7	38.15 AV	54	-15.85	-67.96	-69.09	8.37	-57.11
9	39719.38	41.96 PK	74	-32.04	-64.08	-65.36	8.37	-53.3
10	39719.38	32.32 AV	54	-21.68	-76.1	-73.06	8.37	-62.94

Note: Margin value = Emission Level - Limit value

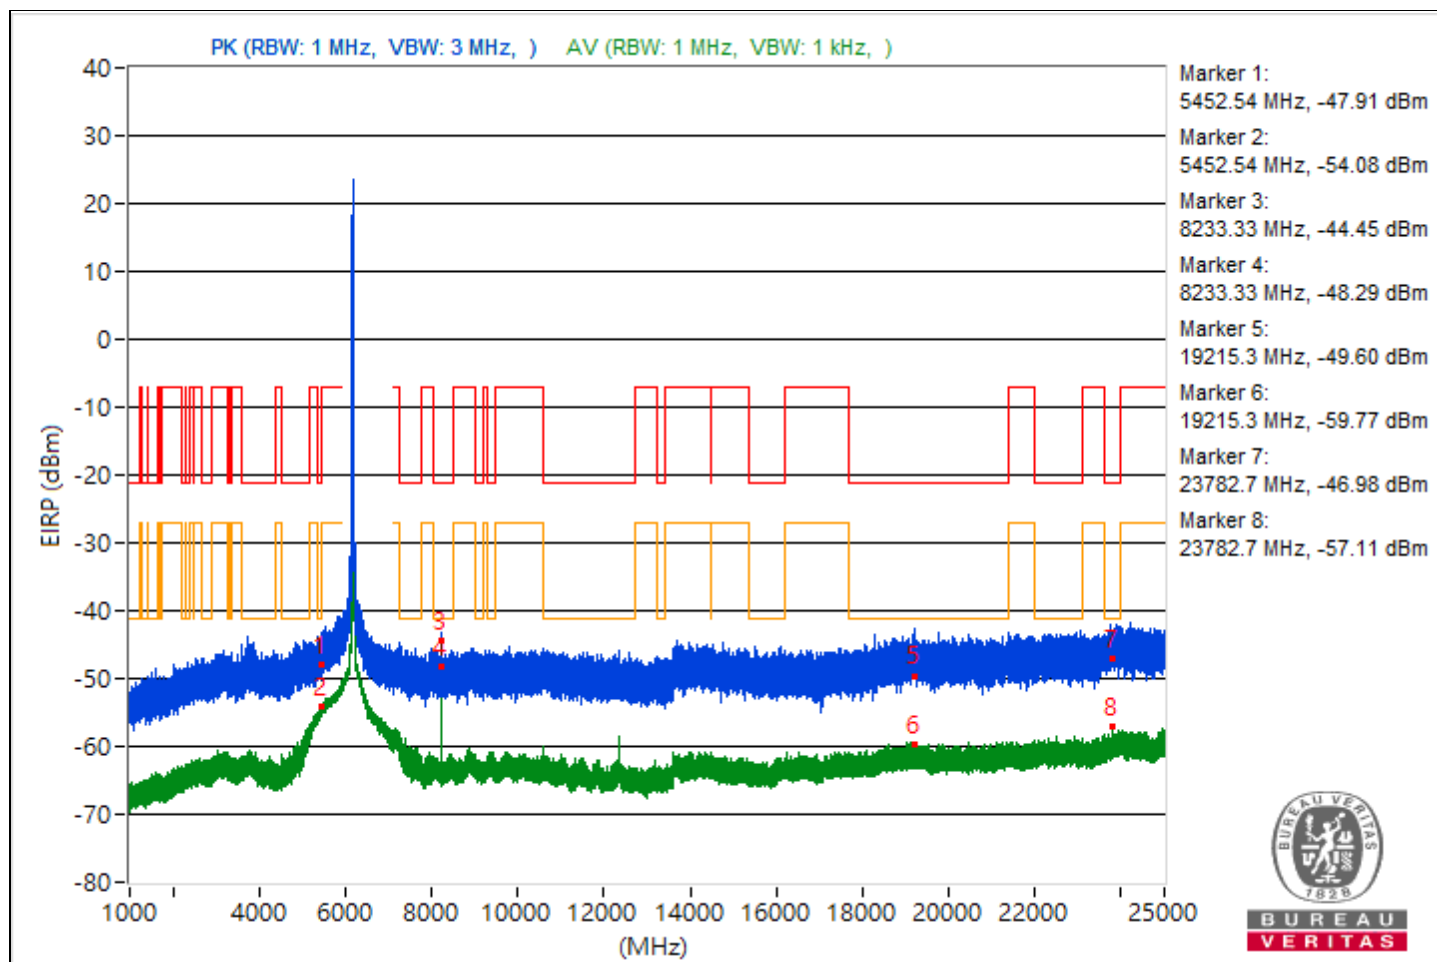


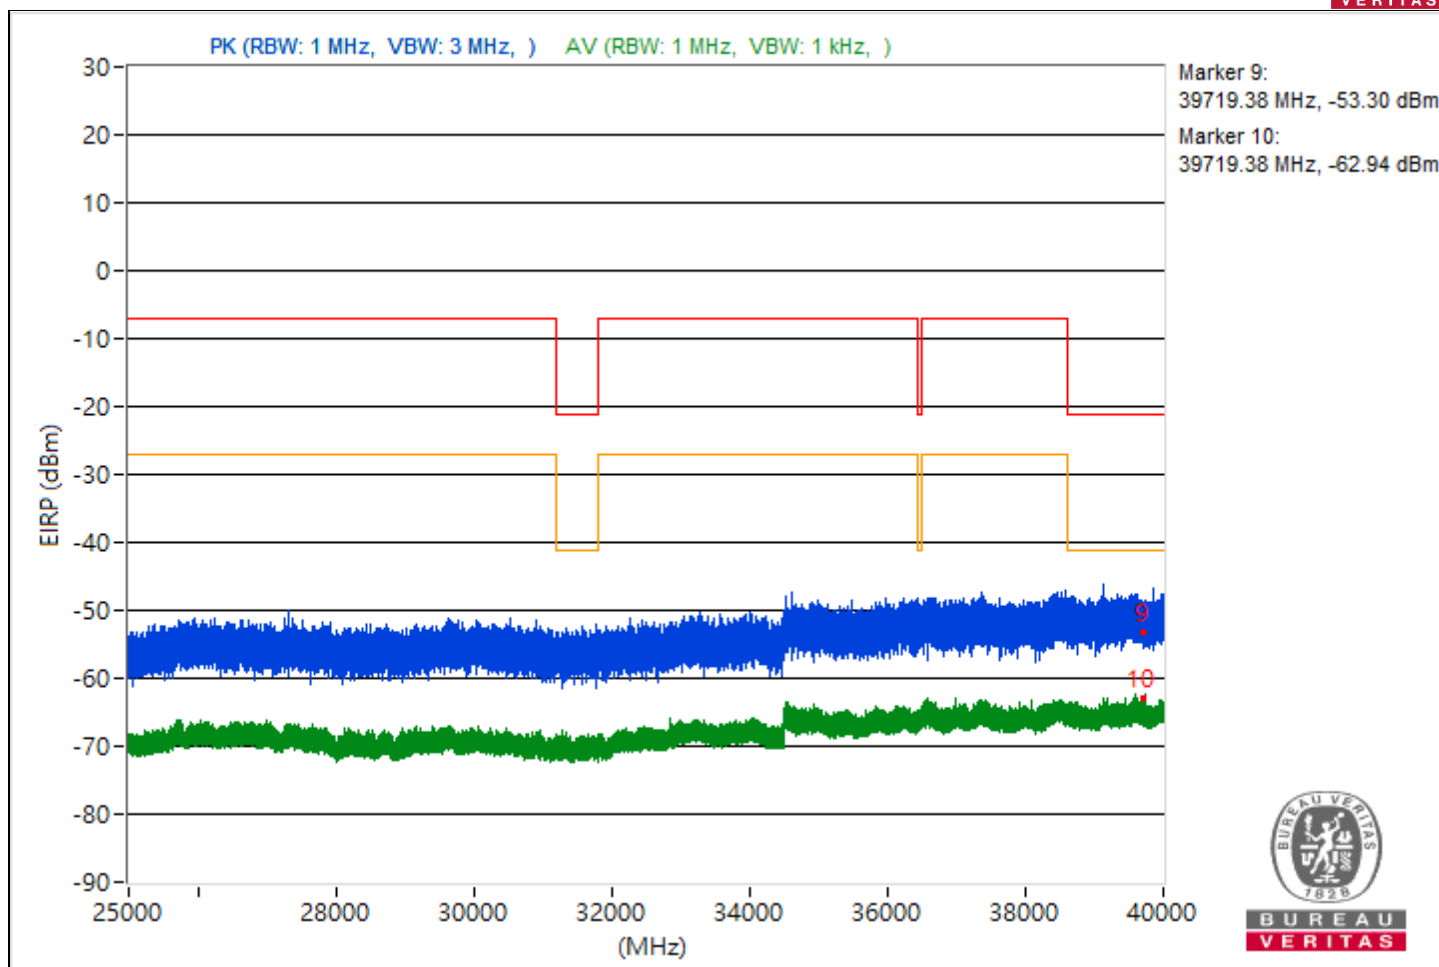


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5448.42	45.94 PK	74	-28.06	-64.92	-58.6	8.37	-49.32
2	5448.42	37.87 AV	54	-16.13	-77.26	-66.08	8.37	-57.39
3	8233.33	47.16 PK	74	-26.84	-57.88	-62.03	8.37	-48.1
4	8233.33	41.09 AV	54	-12.91	-62.75	-75.81	8.37	-54.17
5	19061.2	48.42 PK	74	-25.58	-58.39	-58.06	8.37	-46.84
6	19061.2	35.93 AV	54	-18.07	-74.25	-68.78	8.37	-59.33
7	23956.4	50.2 PK	74	-23.8	-56.65	-56.24	8.37	-45.06
8	23956.4	37.51 AV	54	-16.49	-71.58	-67.57	8.37	-57.75
9	39592.8	44.64 PK	74	-29.36	-61.29	-62.85	8.37	-50.62
10	39592.8	32.47 AV	54	-21.53	-72.45	-77.06	8.37	-62.79

Note: Margin value = Emission Level - Limit value

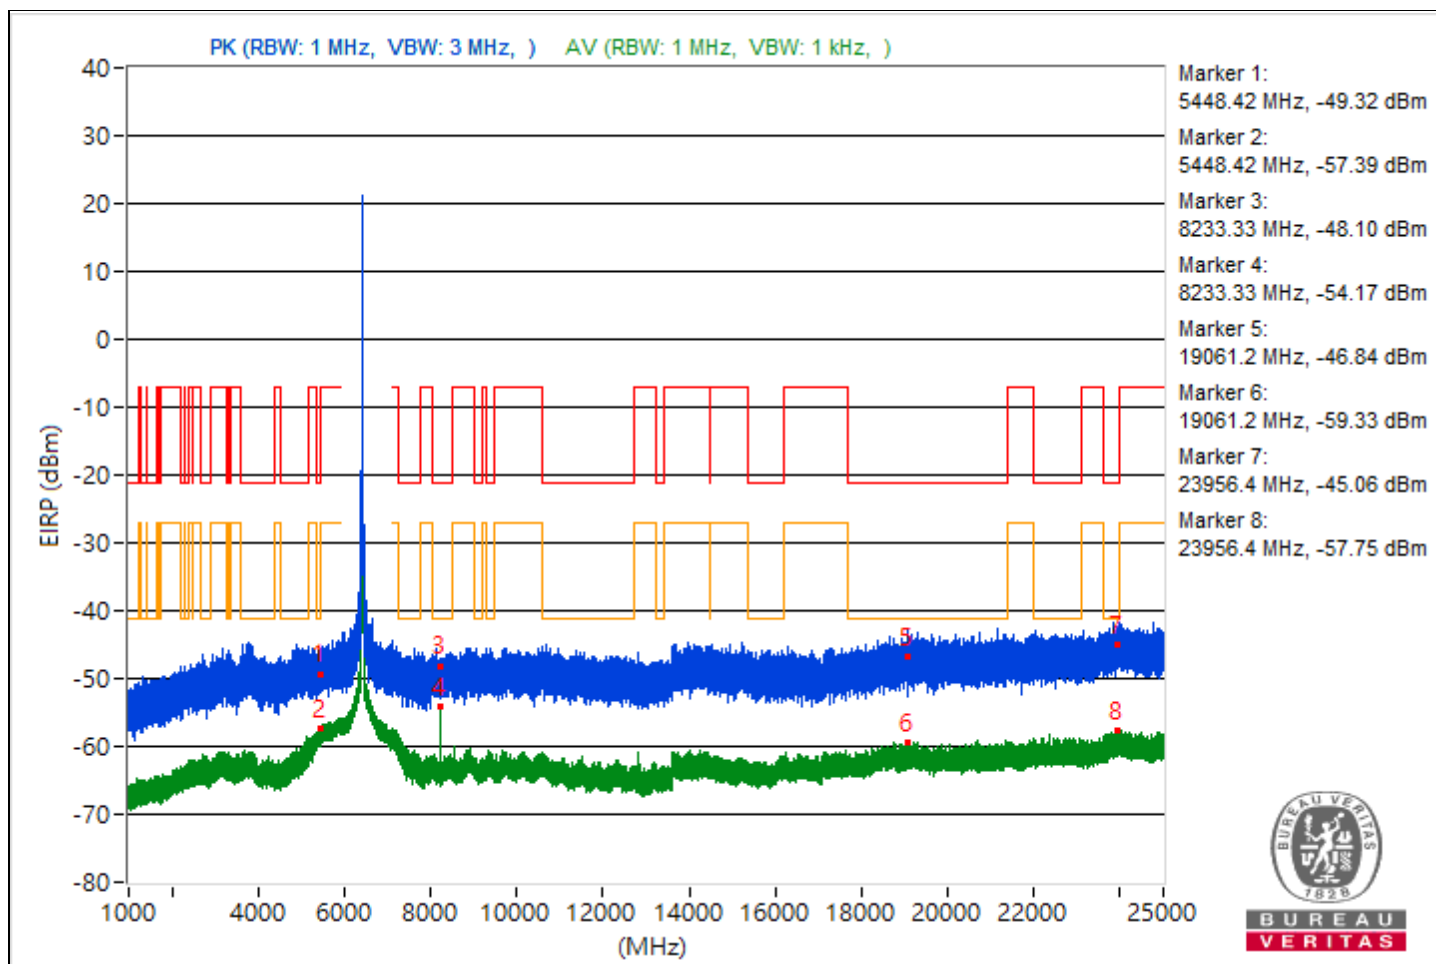


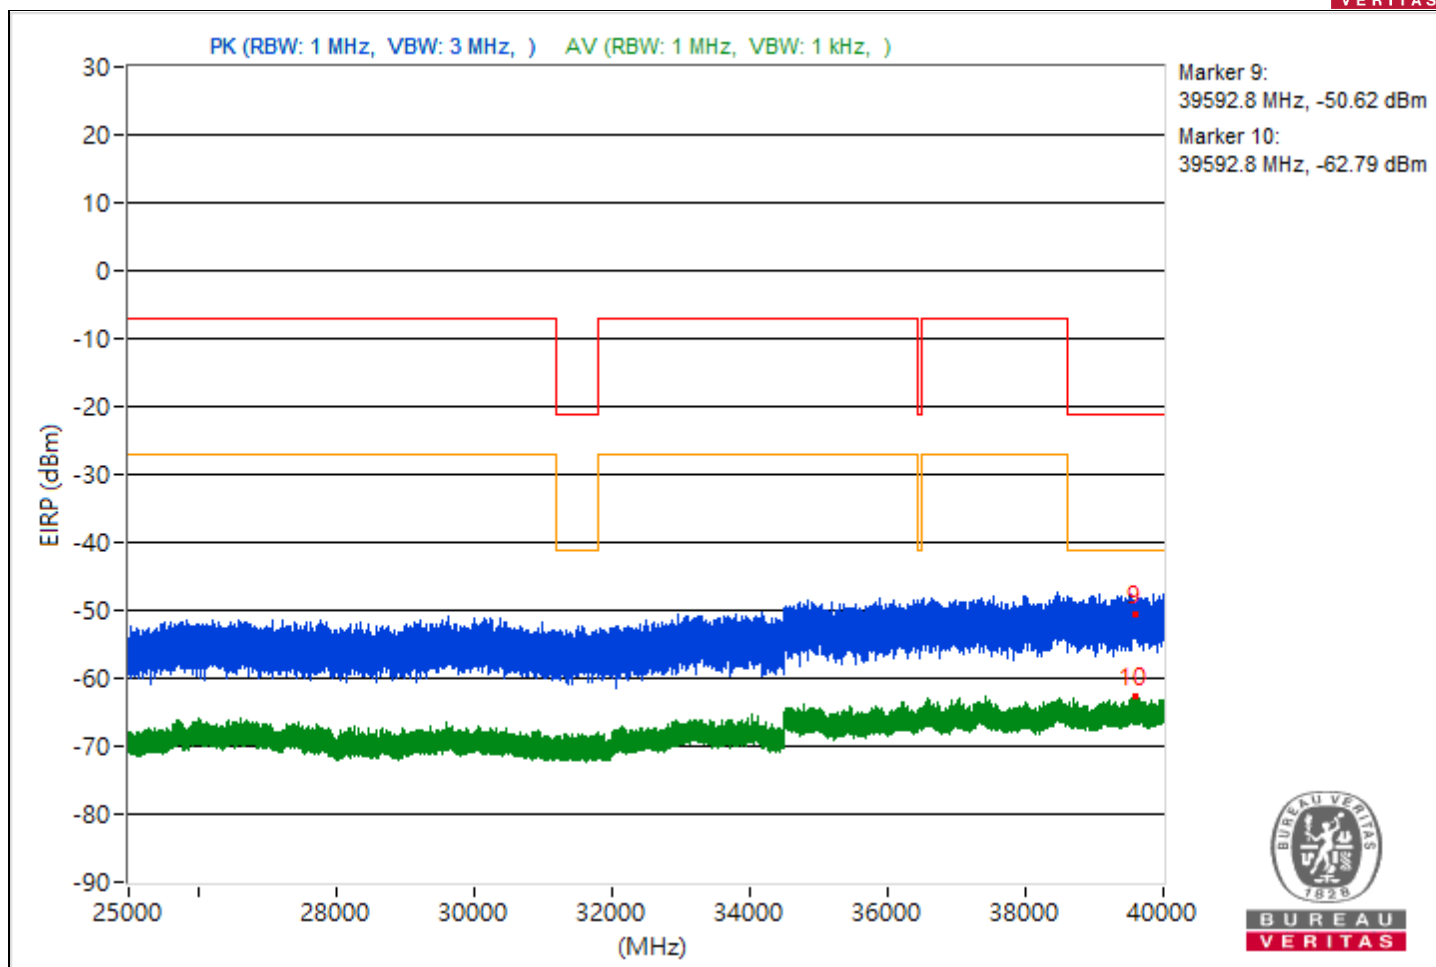


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.43	48.05 PK	74	-25.95	-56.76	-61.81	8.37	-47.21
2	5449.43	39.07 AV	54	-14.93	-67.16	-68.02	8.37	-56.19
3	7262.2	47.2 PK	74	-26.8	-60.03	-58.92	8.37	-48.06
4	7262.2	38.19 AV	54	-15.81	-69.15	-67.84	8.37	-57.07
5	19489.2	48.07 PK	74	-25.93	-58	-59.23	8.37	-47.19
6	19489.2	36.82 AV	54	-17.18	-71.77	-68.48	8.37	-58.44
7	23813.8	49.59 PK	74	-24.41	-56.03	-58.39	8.37	-45.67
8	23813.8	38.21 AV	54	-15.79	-67.85	-69.1	8.37	-57.05
9	39951.47	45.81 PK	74	-28.19	-59.82	-62.16	8.37	-49.45
10	39951.47	32.4 AV	54	-21.6	-76.84	-72.62	8.37	-62.86

Note: Margin value = Emission Level - Limit value

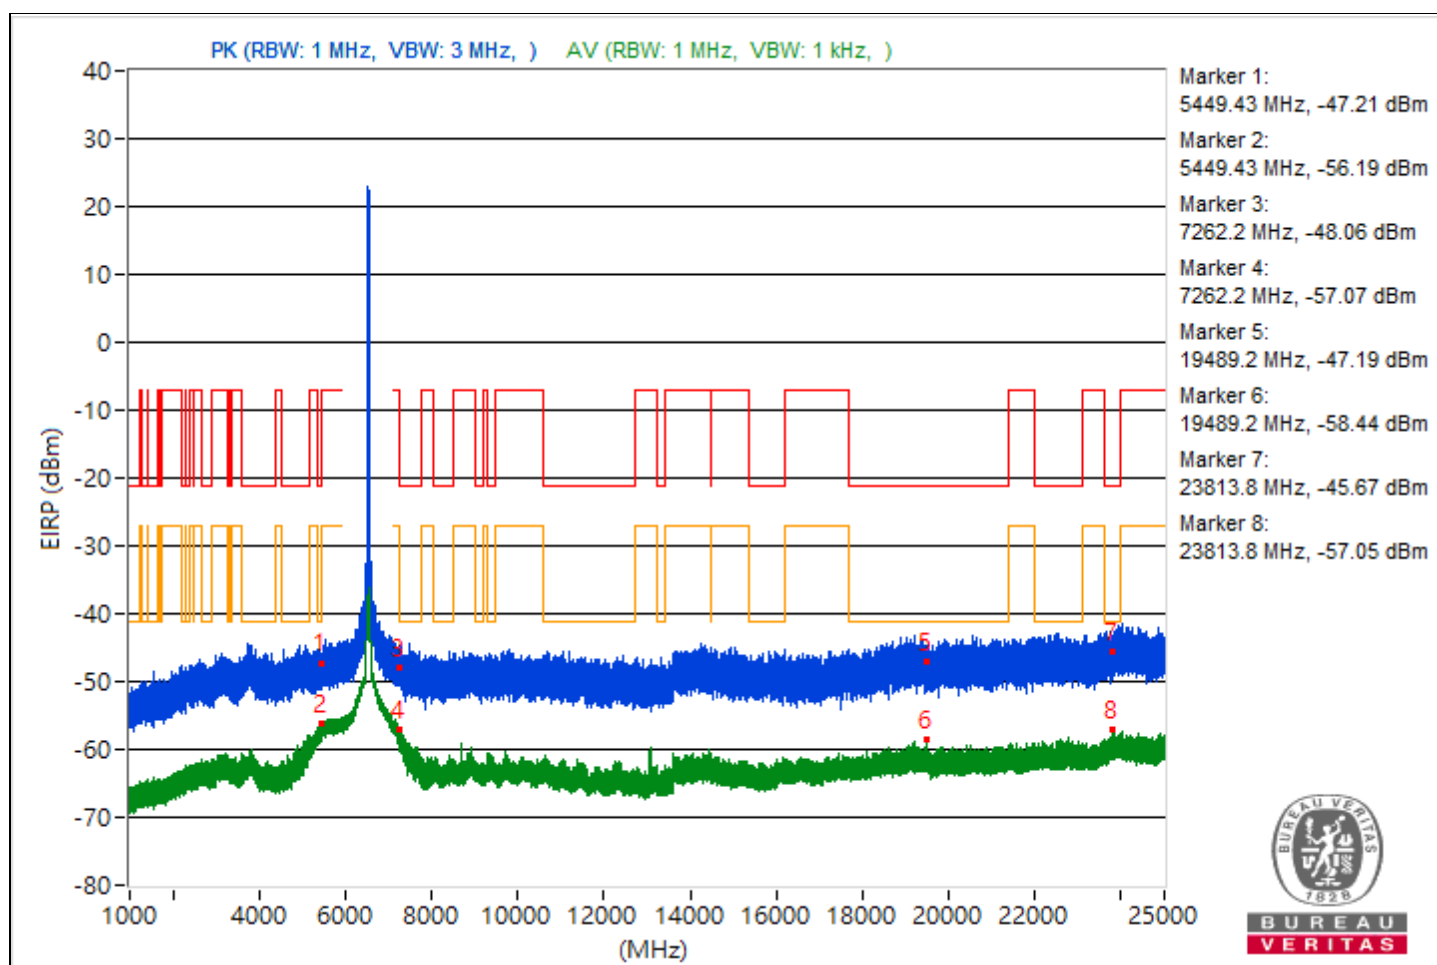


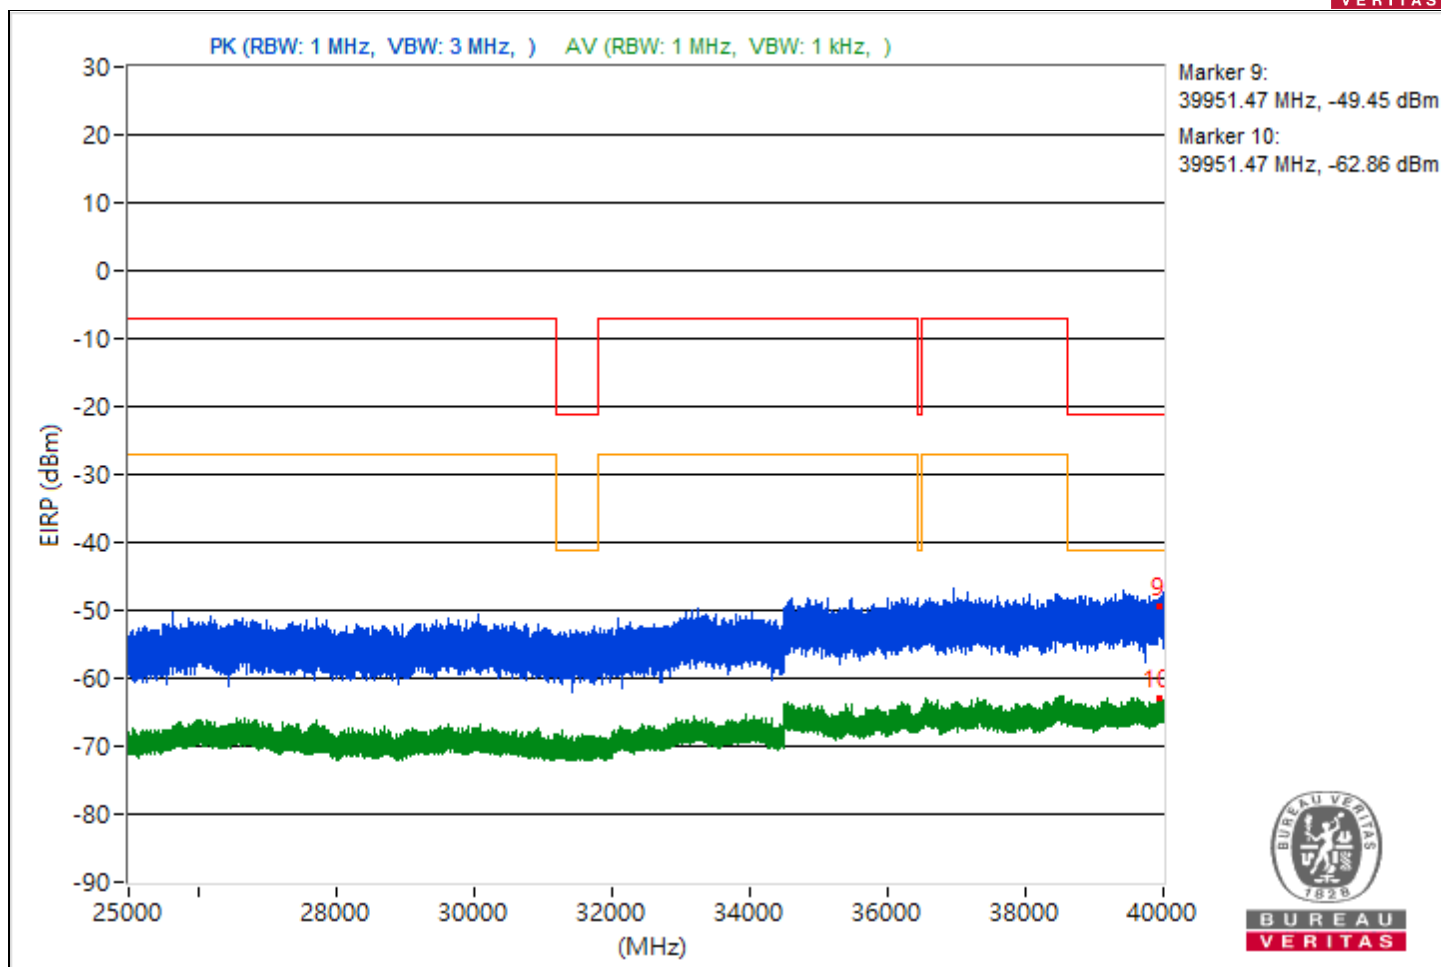


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.14	48.12 PK	74	-25.88	-57.96	-59.15	8.37	-47.14
2	5458.14	38.3 AV	54	-15.7	-70.2	-67.05	8.37	-56.96
3	7250.22	48.82 PK	74	-25.18	-59.35	-56.68	8.37	-46.44
4	7250.22	39.81 AV	54	-14.19	-66.43	-67.26	8.37	-55.45
5	21145.3	48.02 PK	74	-25.98	-59.81	-57.68	8.37	-47.24
6	21145.3	35.67 AV	54	-18.33	-73.67	-69.32	8.37	-59.59
7	23914.5	51.01 PK	74	-22.99	-54.08	-58.05	8.37	-44.25
8	23914.5	37.47 AV	54	-16.53	-71.2	-67.79	8.37	-57.79
9	39960.62	45.75 PK	74	-28.25	-61.77	-60.16	8.37	-49.51
10	39960.62	32.75 AV	54	-21.25	-75.41	-72.77	8.37	-62.51

Note: Margin value = Emission Level - Limit value

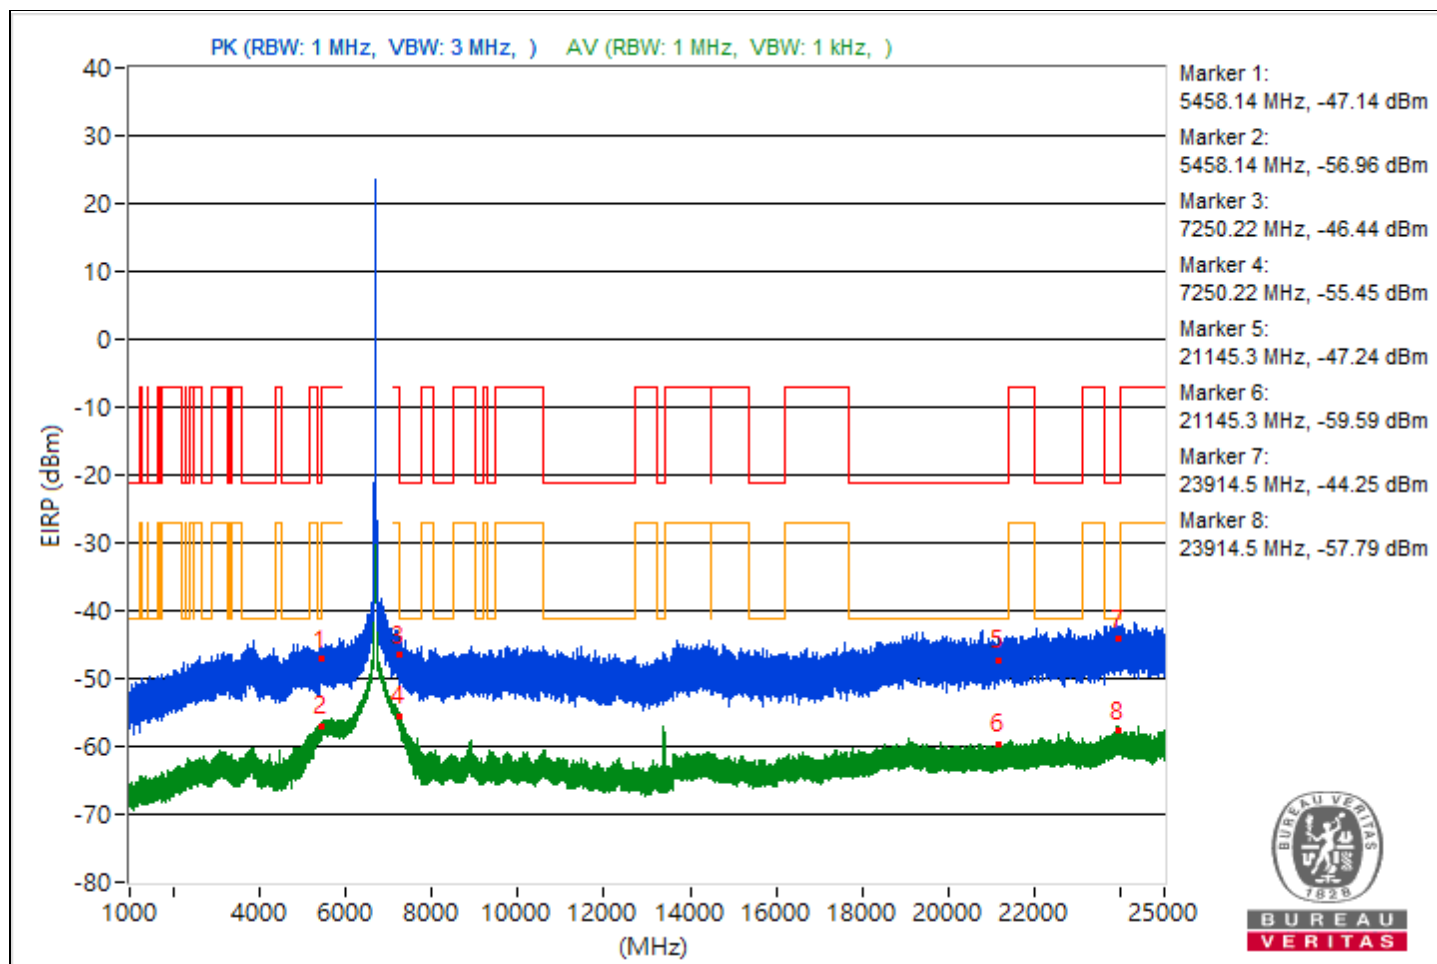


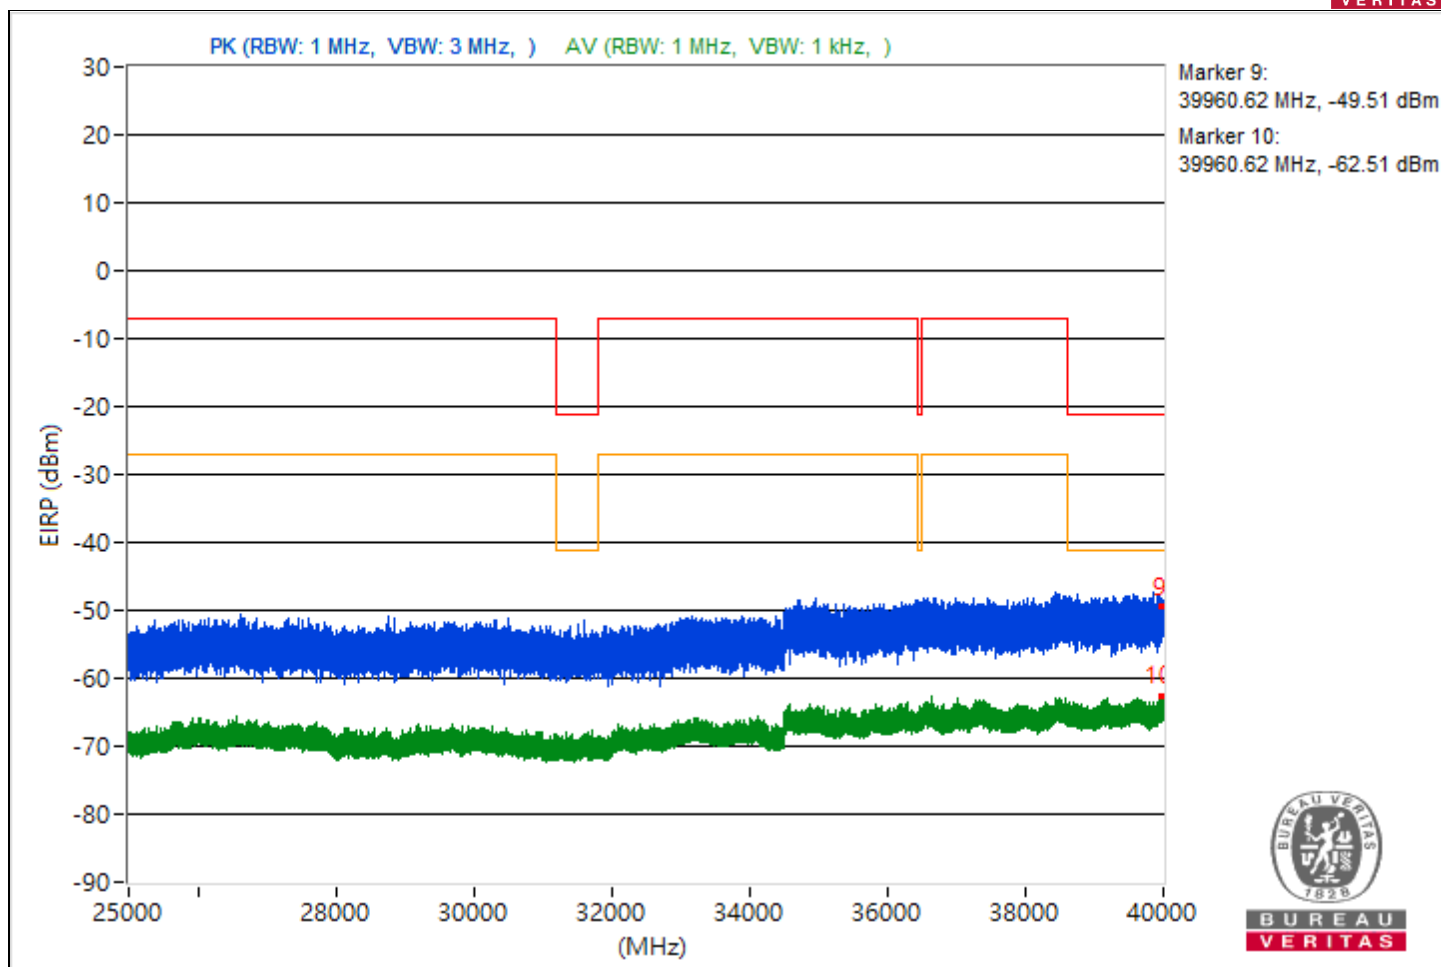


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5438.23	47.61 PK	74	-26.39	-60.38	-58	8.37	-47.65
2	5438.23	38.05 AV	54	-15.95	-69.74	-67.68	8.37	-57.21
3	7258.08	49.82 PK	74	-24.18	-55.78	-58.18	8.37	-45.44
4	7258.08	41.45 AV	54	-12.55	-65.28	-65.11	8.37	-53.81
5	19163.1	47.78 PK	74	-26.22	-59.68	-58.17	8.37	-47.48
6	19163.1	36.23 AV	54	-17.77	-71.56	-69.51	8.37	-59.03
7	23921	46.13 PK	74	-27.87	-60.26	-60.77	8.37	-49.13
8	23921	38.09 AV	54	-15.91	-67.24	-70.45	8.37	-57.17
9	39614.49	45.57 PK	74	-28.43	-59.26	-64.23	8.37	-49.69
10	39614.49	32.33 AV	54	-21.67	-76.49	-72.87	8.37	-62.93

Note: Margin value = Emission Level - Limit value

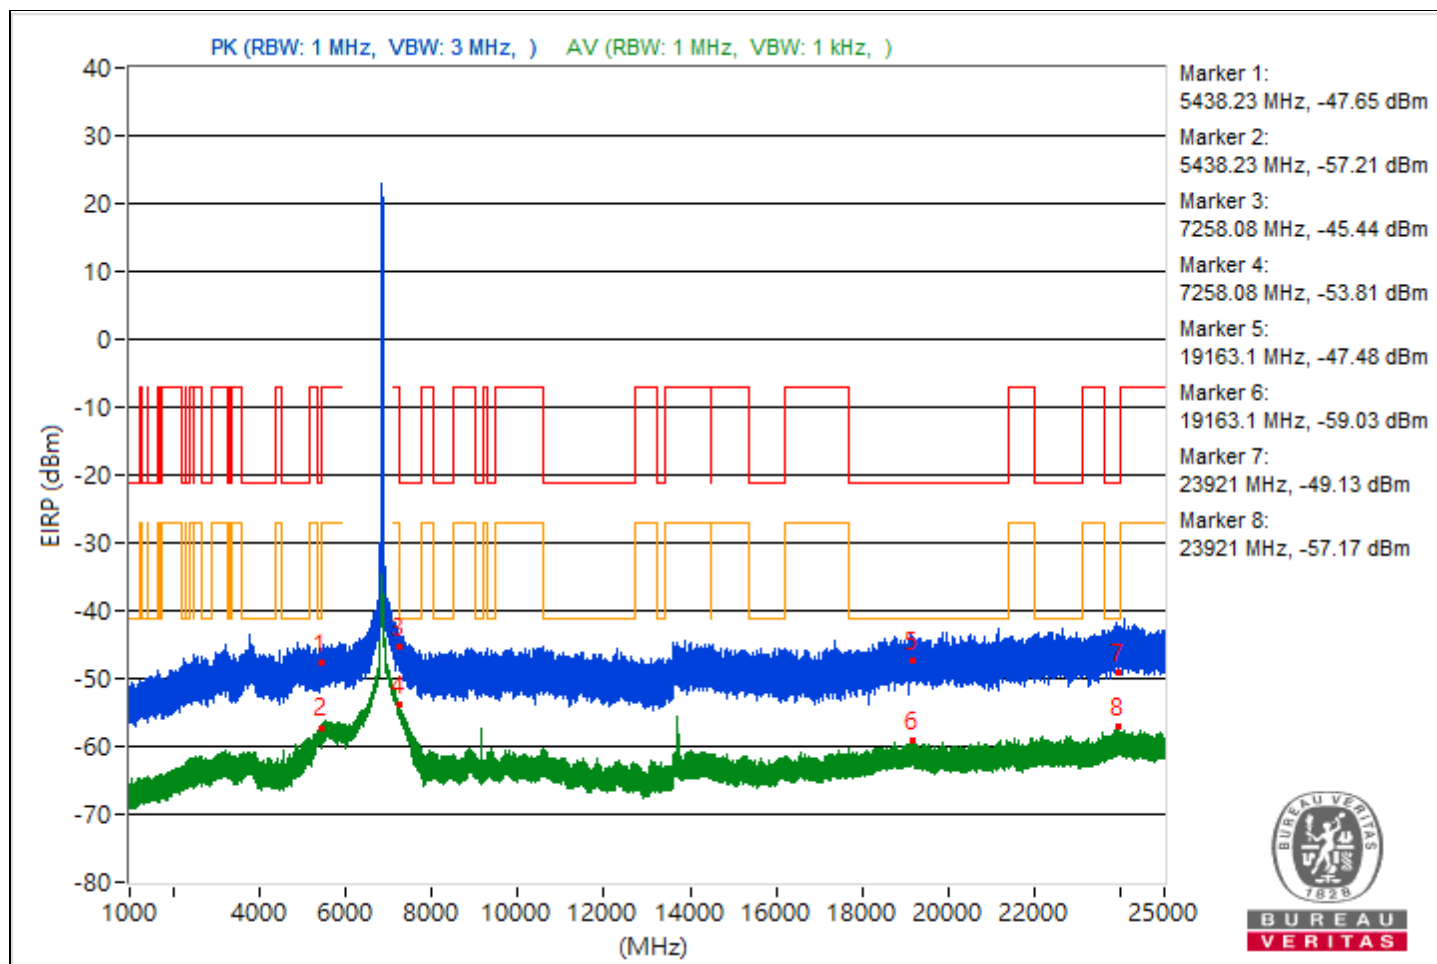


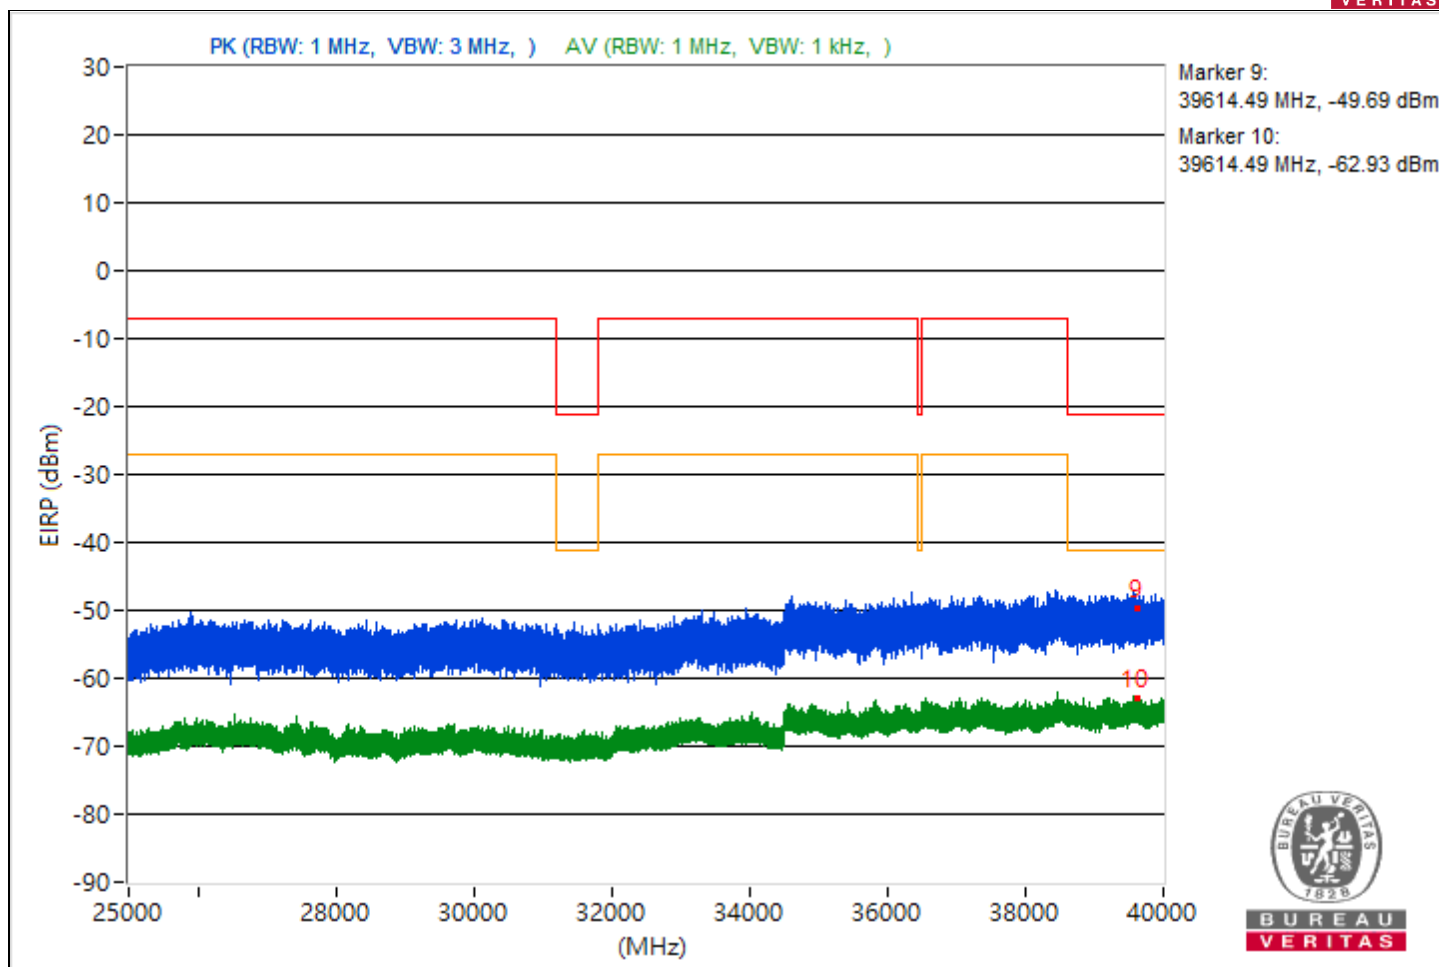


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.78	49.2 PK	74	-24.8	-57.06	-57.86	8.37	-46.06
2	5459.78	42.43 AV	54	-11.57	-64.69	-63.79	8.37	-52.83
3	11933.16	49.92 PK	74	-24.08	-57.61	-55.99	8.37	-45.34
4	11933.16	40.47 AV	54	-13.53	-66.26	-66.09	8.37	-54.79
5	21118.6	48.72 PK	74	-25.28	-59.26	-56.89	8.37	-46.54
6	21118.6	36.04 AV	54	-17.96	-68.84	-73.58	8.37	-59.22
7	23888.6	49.39 PK	74	-24.61	-56.48	-58.19	8.37	-45.87
8	23888.6	37.87 AV	54	-16.13	-67.07	-71.61	8.37	-57.39
9	39957.33	45.32 PK	74	-28.68	-62.23	-60.56	8.37	-49.94
10	39957.33	32.27 AV	54	-21.73	-72.86	-76.7	8.37	-62.99

Note: Margin value = Emission Level - Limit value

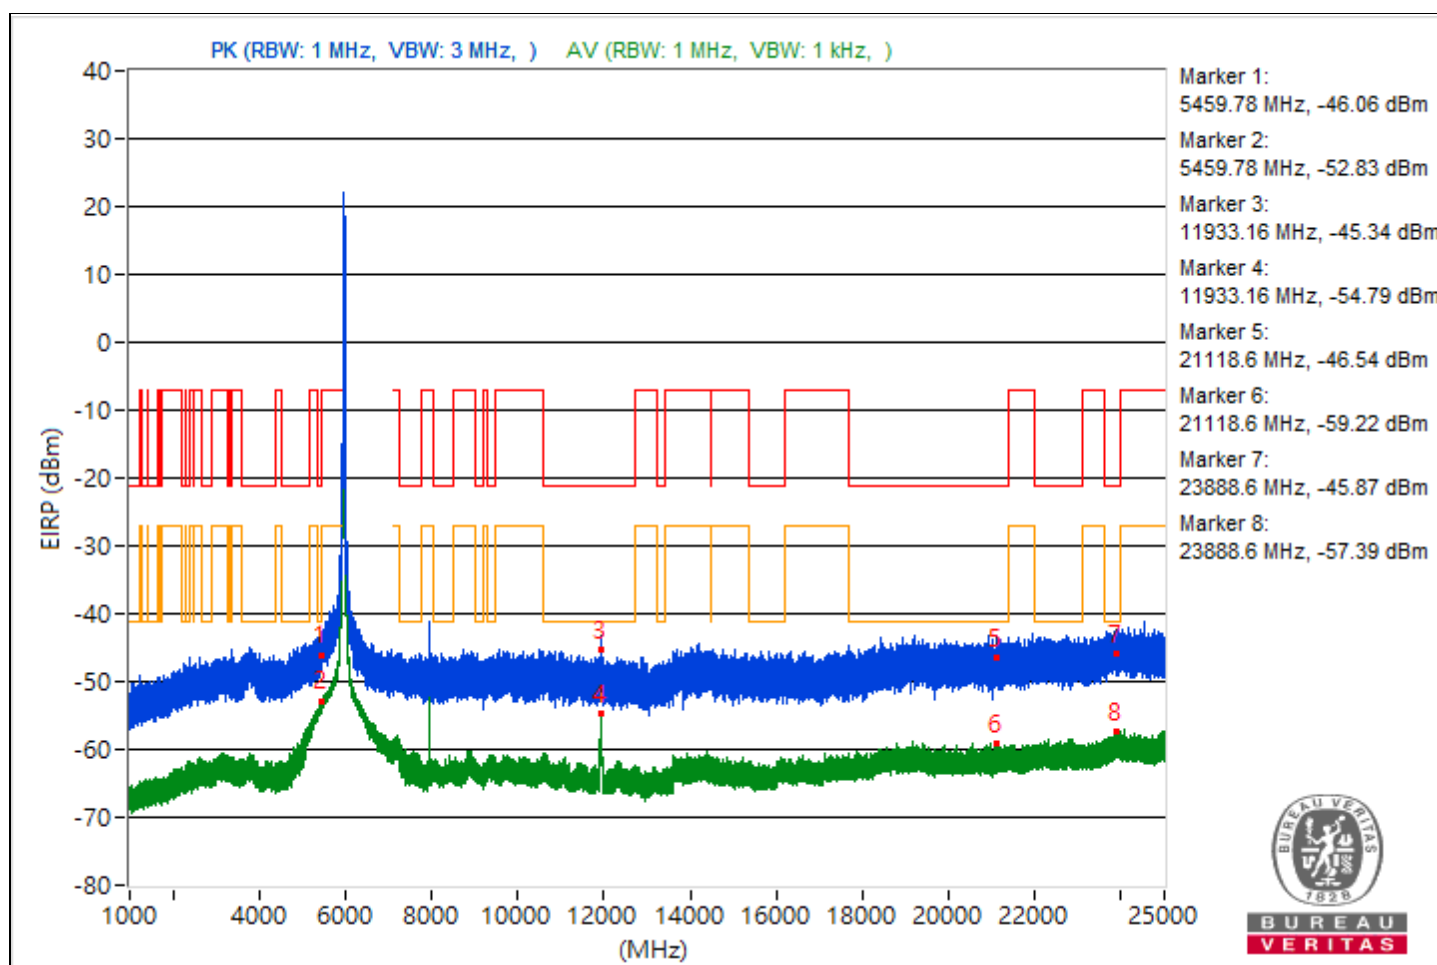


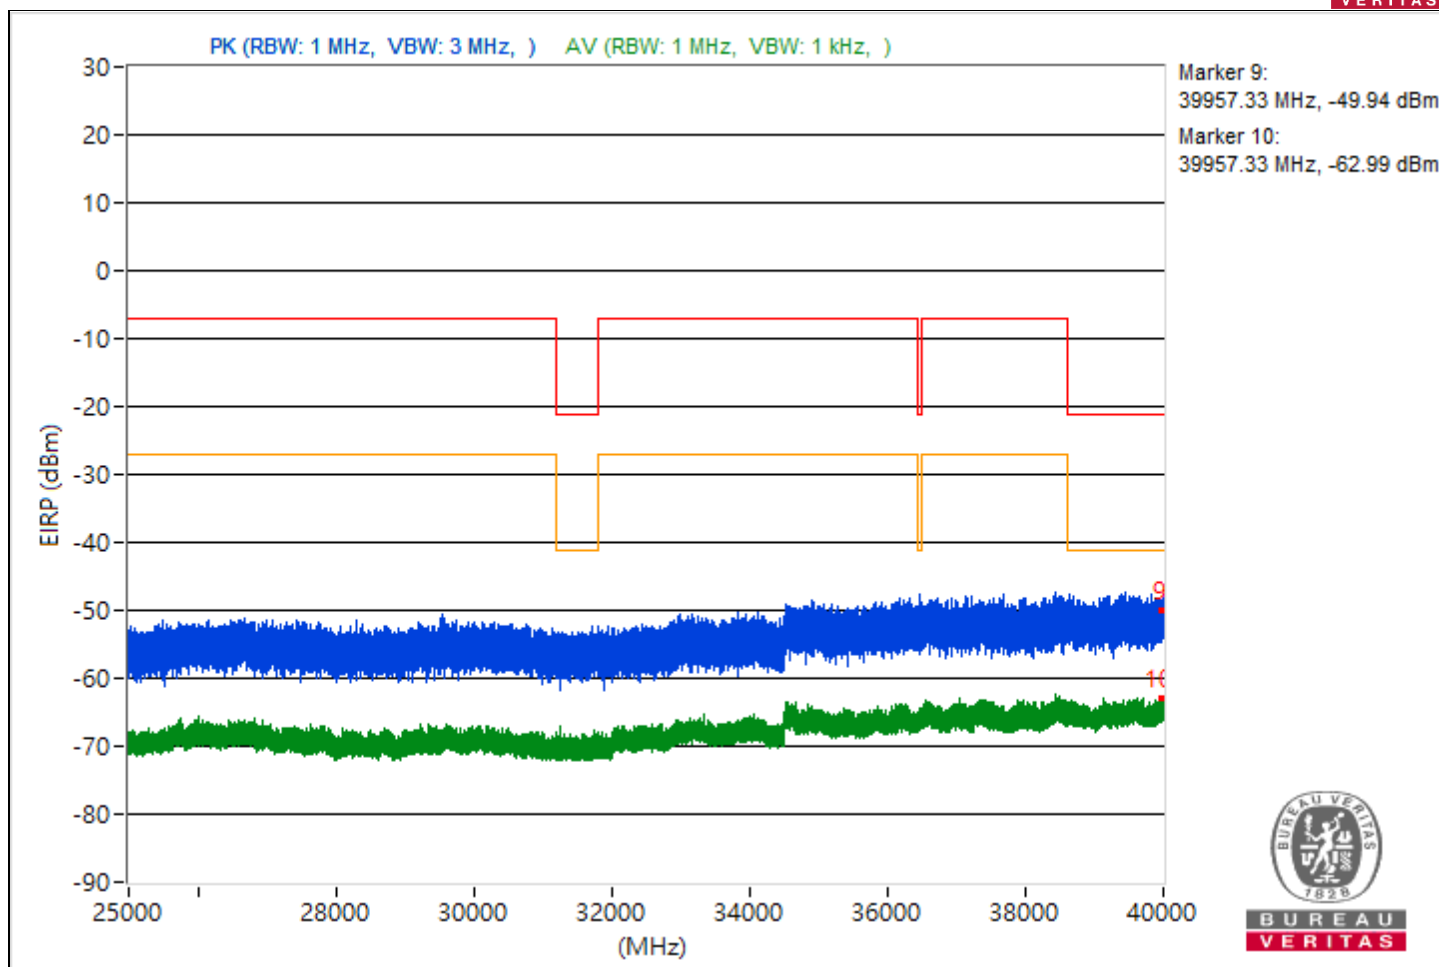


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.91	47.31 PK	74	-26.69	-58.21	-60.84	8.37	-47.95
2	5457.91	41.24 AV	54	-12.76	-64.85	-66.03	8.37	-54.02
3	8220	50.57 PK	74	-23.43	-54.23	-59.32	8.37	-44.69
4	8220	47.23 AV	54	-6.77	-56.68	-68.53	8.37	-48.03
5	21154	46.92 PK	74	-27.08	-61.04	-58.71	8.37	-48.34
6	21154	35.89 AV	54	-18.11	-73	-69.28	8.37	-59.37
7	23855	48.61 PK	74	-25.39	-57.39	-58.8	8.37	-46.65
8	23855	38 AV	54	-16	-70.94	-67.15	8.37	-57.26
9	39609.78	43.63 PK	74	-30.37	-62.73	-63.31	8.37	-51.63
10	39609.78	32.32 AV	54	-21.68	-72.51	-77.47	8.37	-62.94

Note: Margin value = Emission Level - Limit value

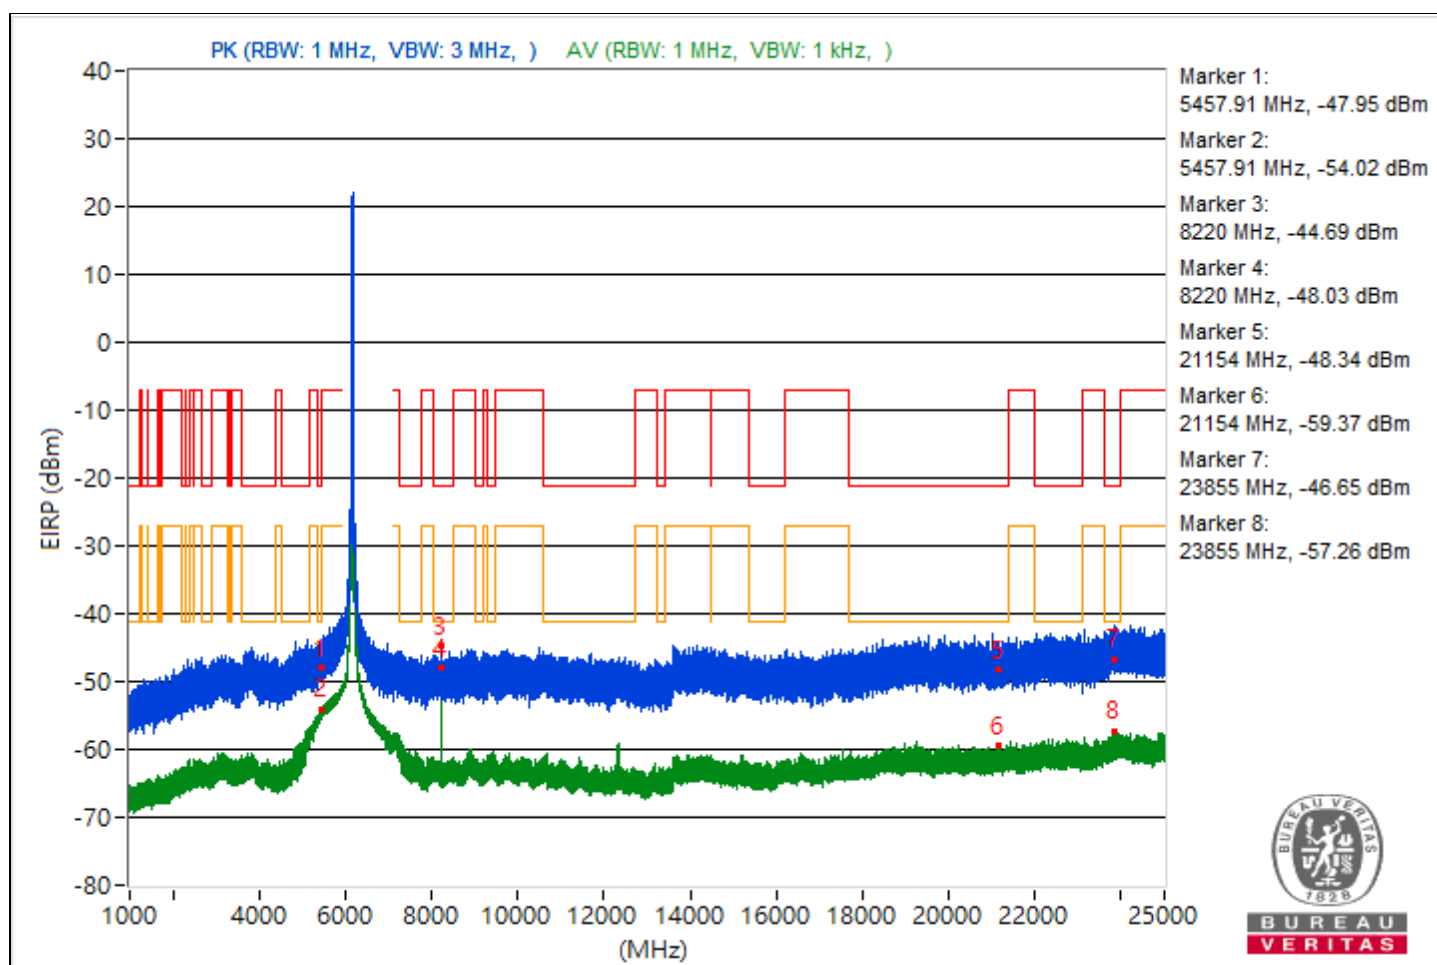


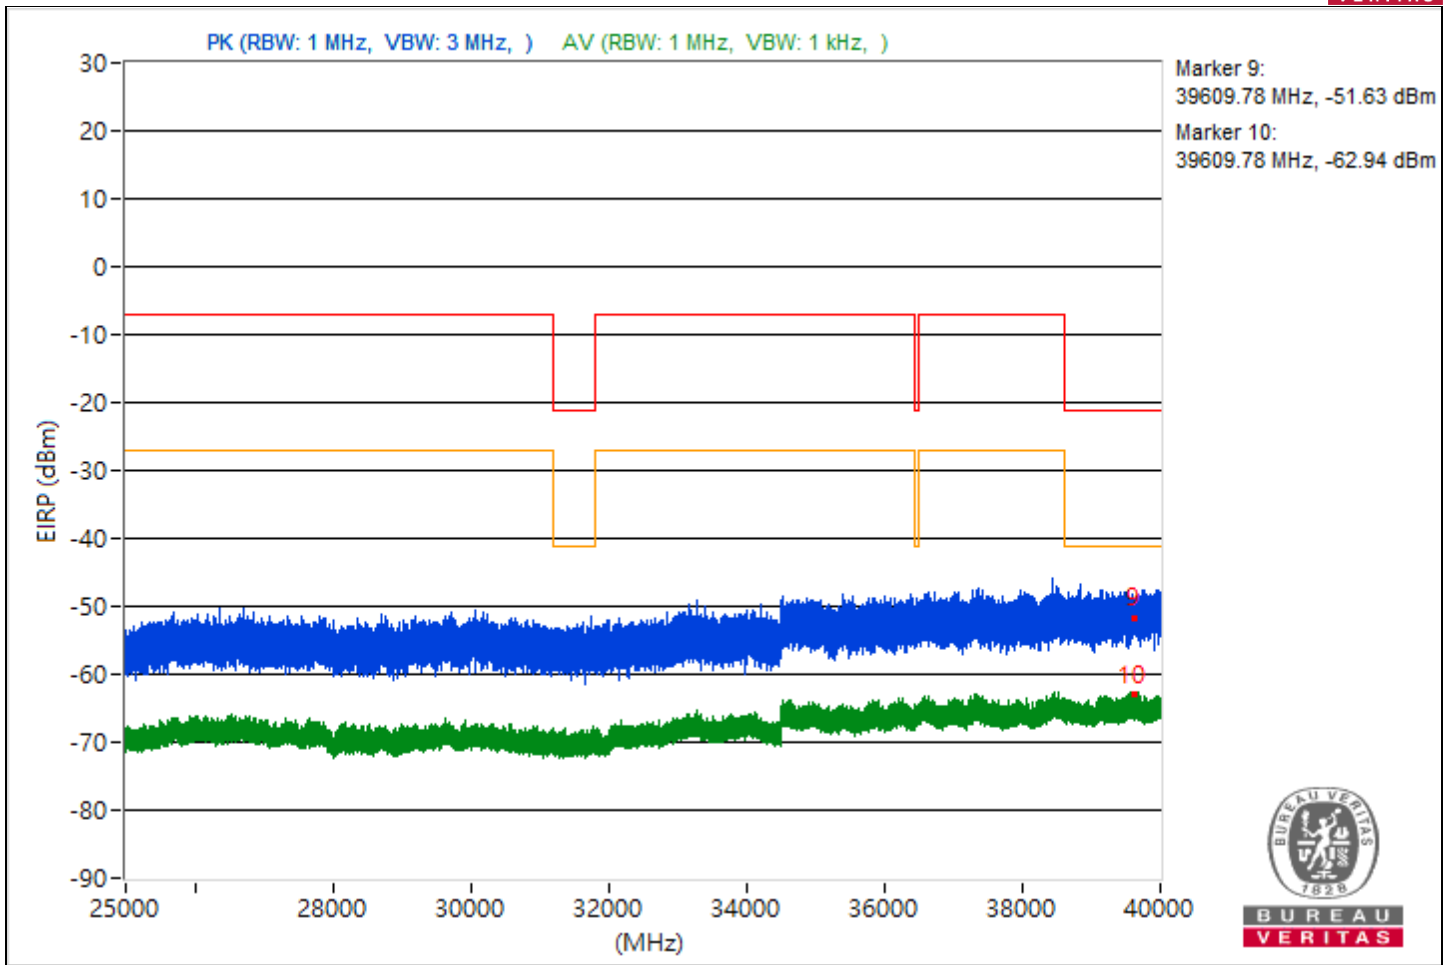


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.97	48.08 PK	74	-25.92	-59.02	-58.15	8.37	-47.18
2	5455.97	40.16 AV	54	-13.84	-66.71	-66.27	8.37	-55.1
3	7253.49	46.47 PK	74	-27.53	-60.12	-60.22	8.37	-48.79
4	7253.49	38.11 AV	54	-15.89	-68.08	-69.03	8.37	-57.15
5	21215.1	47.56 PK	74	-26.44	-60.12	-58.24	8.37	-47.7
6	21215.1	36.12 AV	54	-17.88	-72.72	-69.06	8.37	-59.14
7	23991.5	48.2 PK	74	-25.8	-60.35	-57.12	8.37	-47.06
8	23991.5	37.38 AV	54	-16.62	-68	-71.03	8.37	-57.88
9	39603.47	45.57 PK	74	-28.43	-58.95	-65.38	8.37	-49.69
10	39603.47	32.86 AV	54	-21.14	-75.19	-72.72	8.37	-62.4

Note: Margin value = Emission Level - Limit value

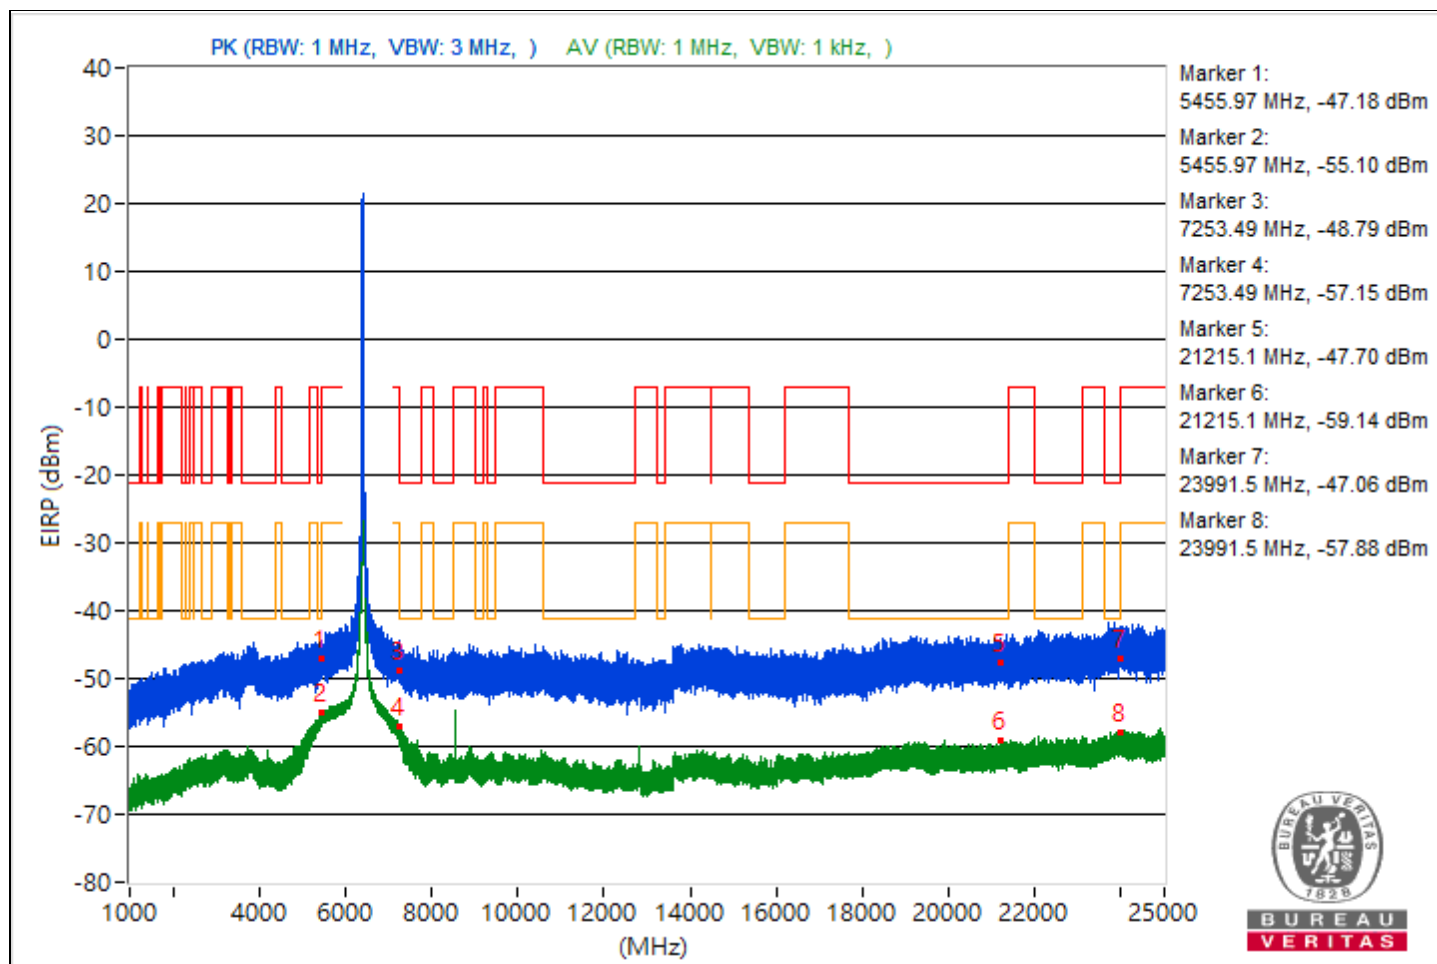


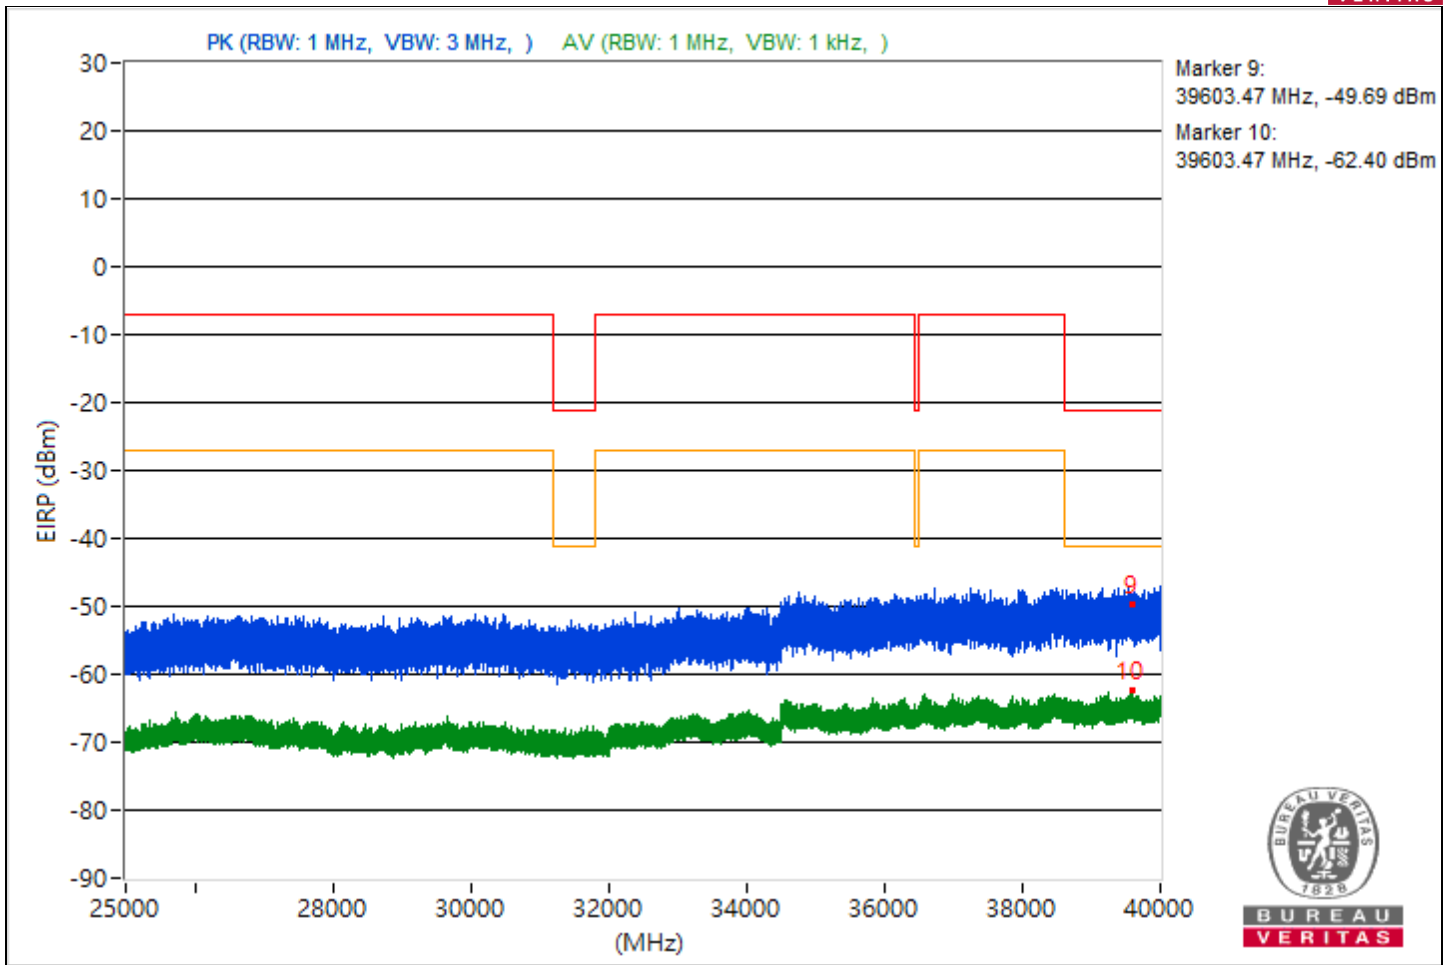


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.34	47.48 PK	74	-26.52	-58.35	-60.15	8.37	-47.78
2	5455.34	38.88 AV	54	-15.12	-68.14	-67.4	8.37	-56.38
3	7257.46	47.25 PK	74	-26.75	-58.46	-60.57	8.37	-48.01
4	7257.46	38.36 AV	54	-15.64	-68.67	-67.92	8.37	-56.9
5	19123.1	48.37 PK	74	-25.63	-59.03	-57.62	8.37	-46.89
6	19123.1	36.35 AV	54	-17.65	-69.47	-71.3	8.37	-58.91
7	23923.3	49.47 PK	74	-24.53	-57.61	-56.78	8.37	-45.79
8	23923.3	37.73 AV	54	-16.27	-67.72	-70.57	8.37	-57.53
9	39429.24	43.4 PK	74	-30.6	-65.64	-61.7	8.37	-51.86
10	39429.24	32.33 AV	54	-21.67	-76.76	-72.75	8.37	-62.93

Note: Margin value = Emission Level - Limit value

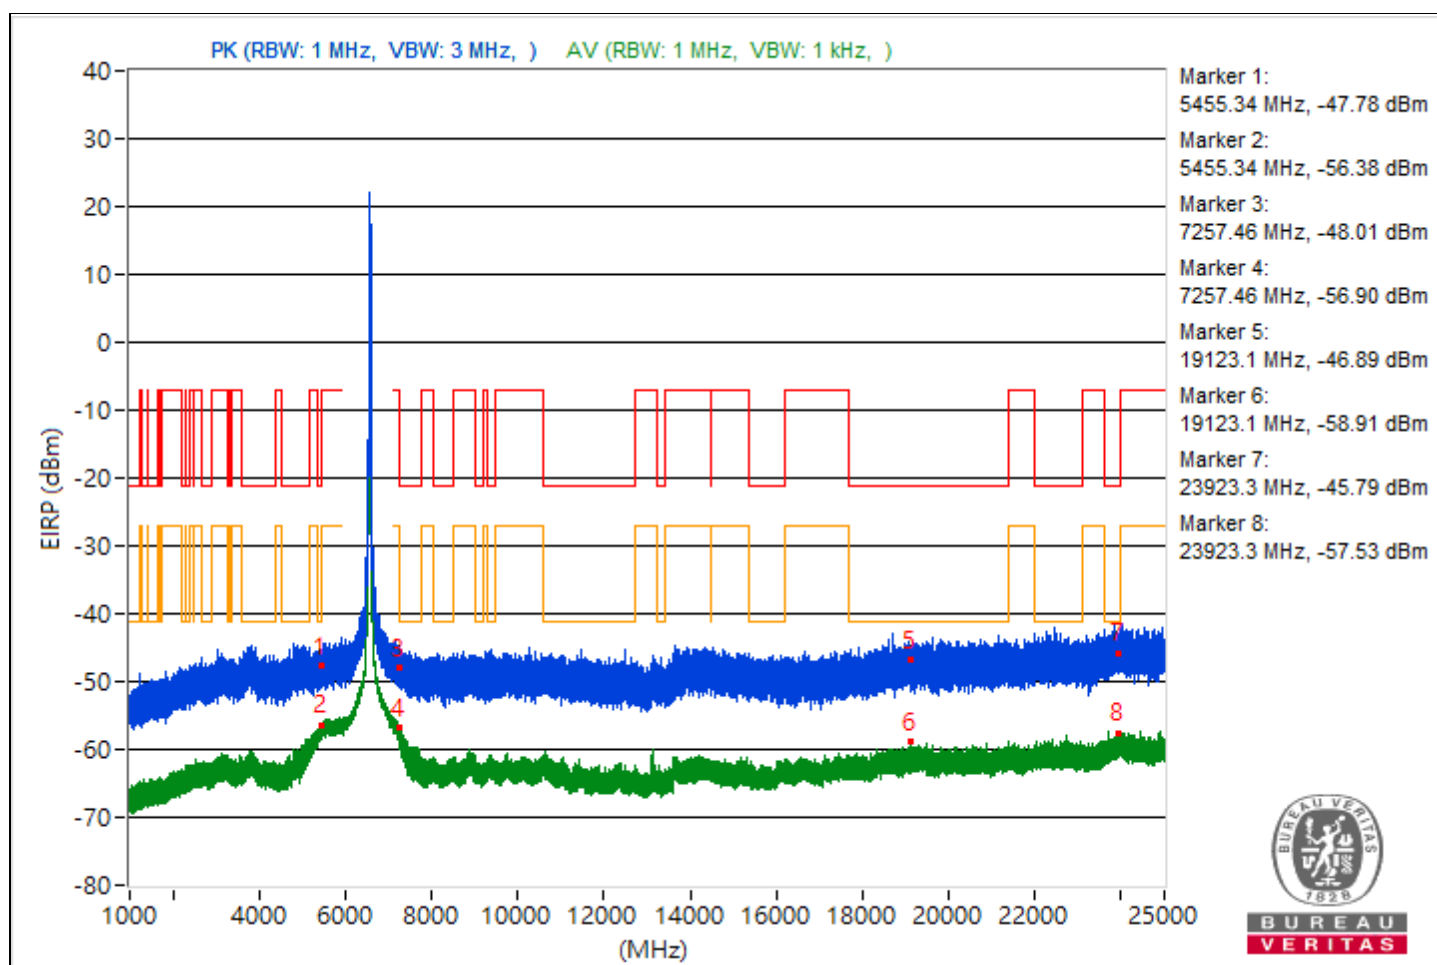


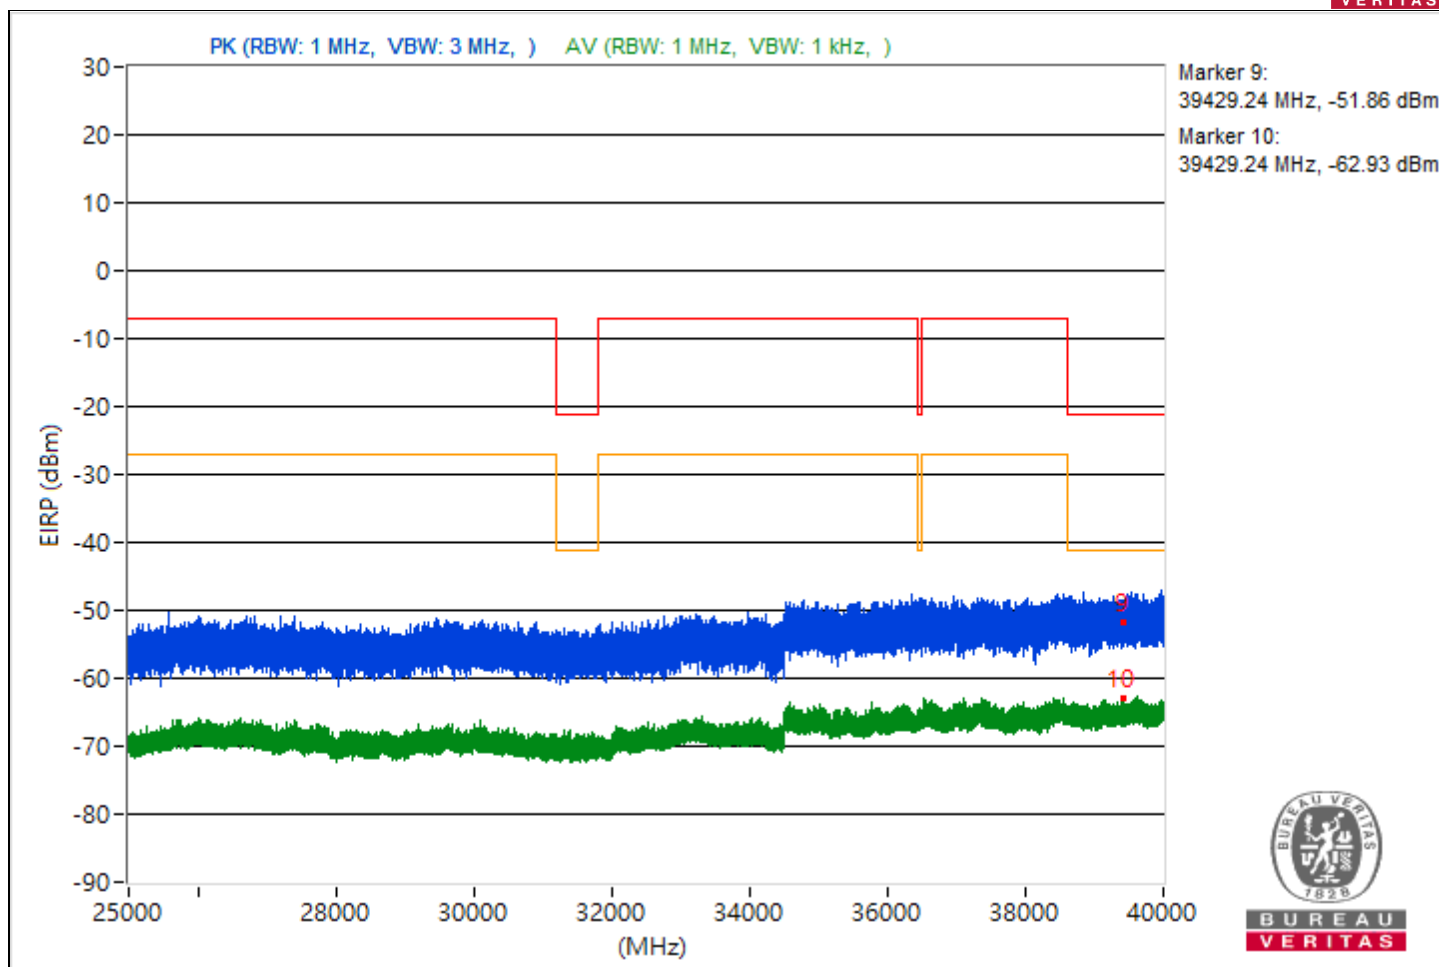


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.52	46.68 PK	74	-27.32	-60.4	-59.57	8.37	-48.58
2	5457.52	38.38 AV	54	-15.62	-69.06	-67.59	8.37	-56.88
3	7254.34	49.11 PK	74	-24.89	-57.69	-57.37	8.37	-46.15
4	7254.34	40.02 AV	54	-13.98	-66.06	-67.25	8.37	-55.24
5	20915.6	47.3 PK	74	-26.7	-58.44	-60.47	8.37	-47.96
6	20915.6	36.02 AV	54	-17.98	-69.46	-72.21	8.37	-59.24
7	23863.1	48.95 PK	74	-25.05	-57.67	-57.71	8.37	-46.31
8	23863.1	37.8 AV	54	-16.2	-70.99	-67.41	8.37	-57.46
9	39976.89	44.04 PK	74	-29.96	-63.18	-62.09	8.37	-51.22
10	39976.89	32.42 AV	54	-21.58	-76.84	-72.6	8.37	-62.84

Note: Margin value = Emission Level - Limit value

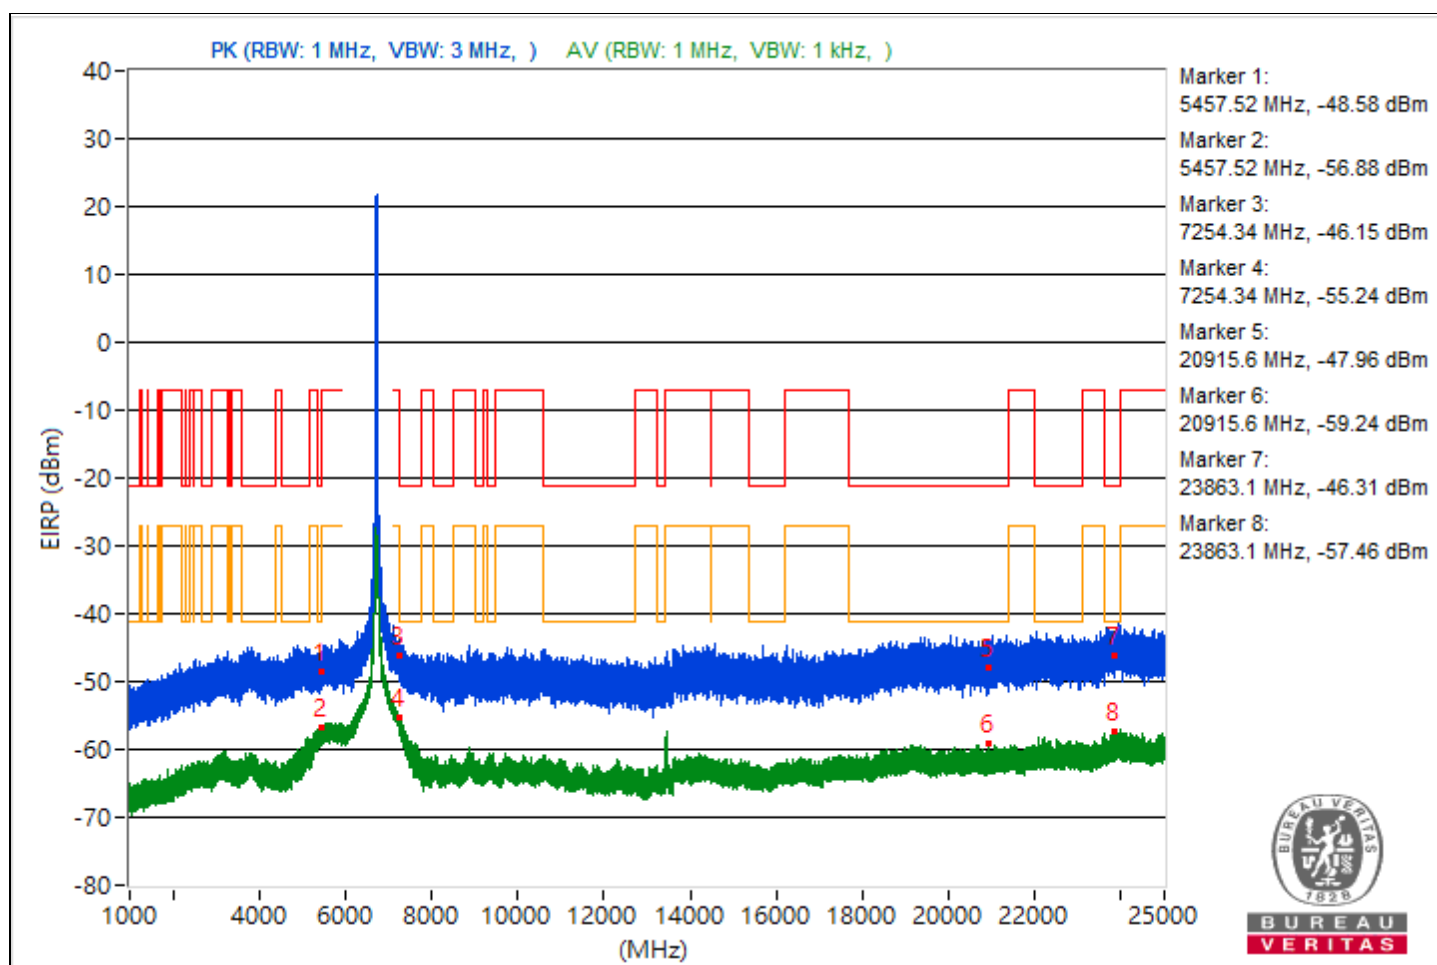


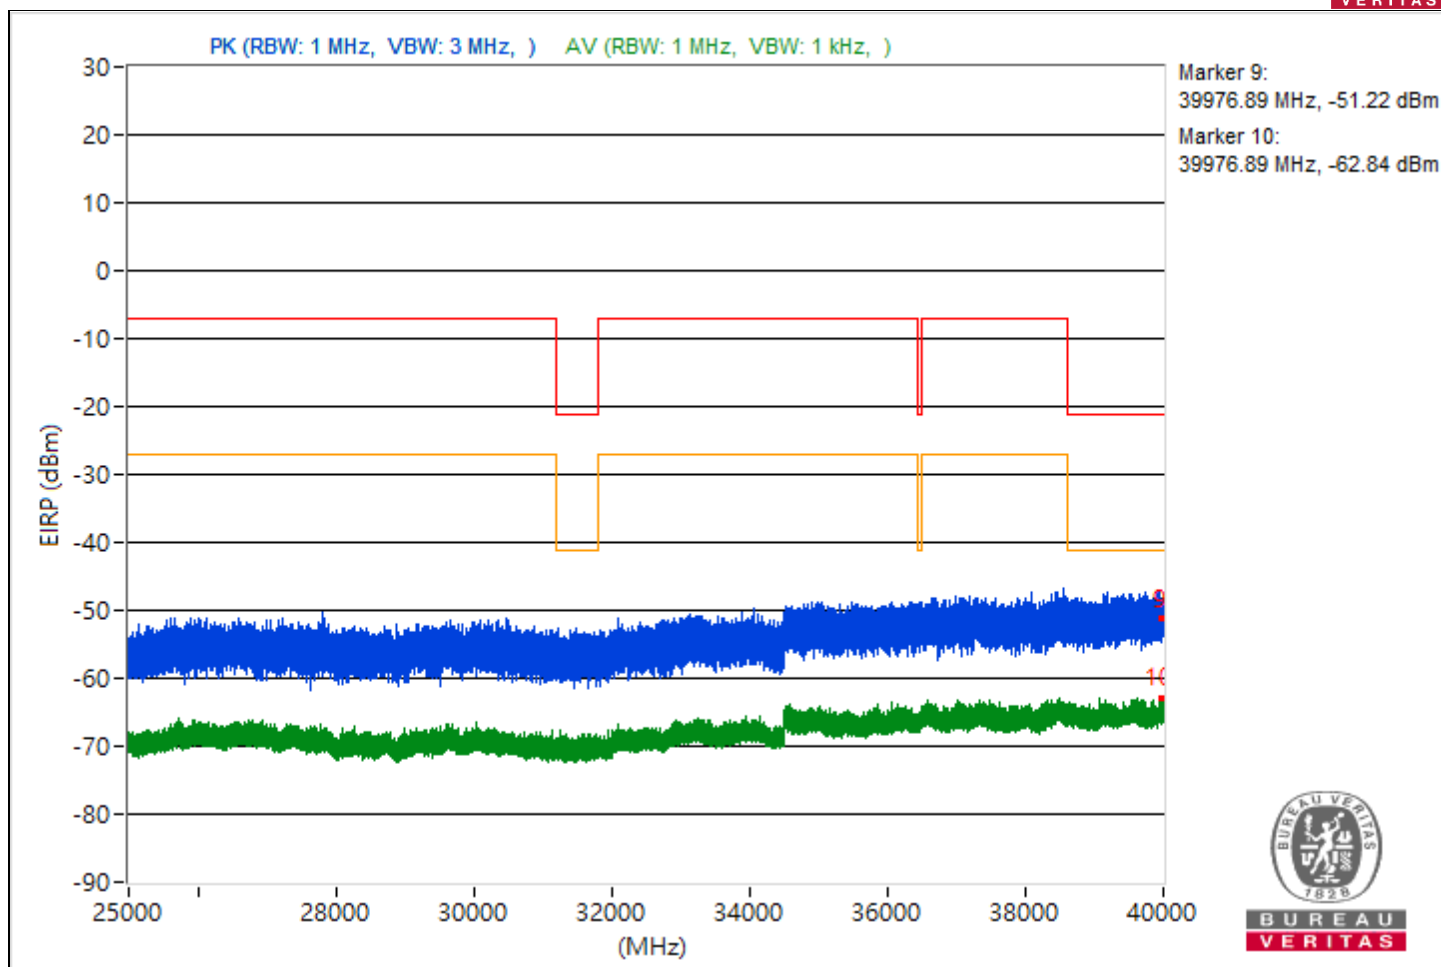


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.1	48.6 PK	74	-25.4	-58.33	-57.77	8.37	-46.66
2	5454.1	38.2 AV	54	-15.8	-67.73	-69.28	8.37	-57.06
3	7259.79	49.63 PK	74	-24.37	-57.57	-56.52	8.37	-45.63
4	7259.79	40.55 AV	54	-13.45	-65.66	-66.58	8.37	-54.71
5	21167	46.49 PK	74	-27.51	-60.81	-59.57	8.37	-48.77
6	21167	35.45 AV	54	-18.55	-73.97	-69.51	8.37	-59.81
7	23931	48.83 PK	74	-25.17	-57.23	-58.49	8.37	-46.43
8	23931	37.37 AV	54	-16.63	-72.04	-67.59	8.37	-57.89
9	39551.38	45.31 PK	74	-28.69	-64.38	-59.55	8.37	-49.95
10	39551.38	31.94 AV	54	-22.06	-73.14	-77.15	8.37	-63.32

Note: Margin value = Emission Level - Limit value

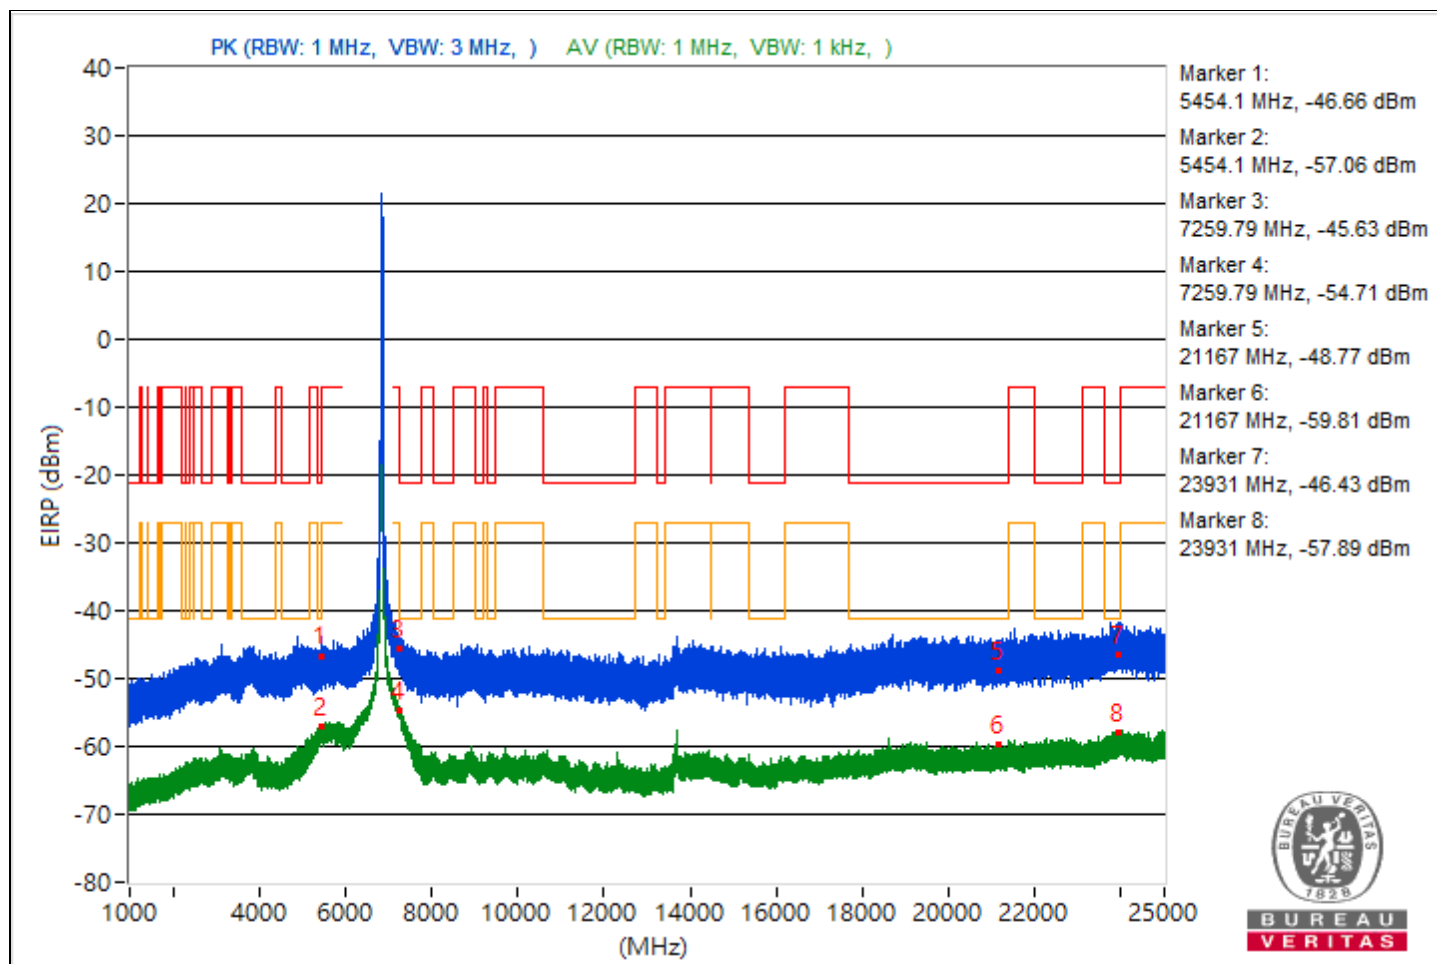


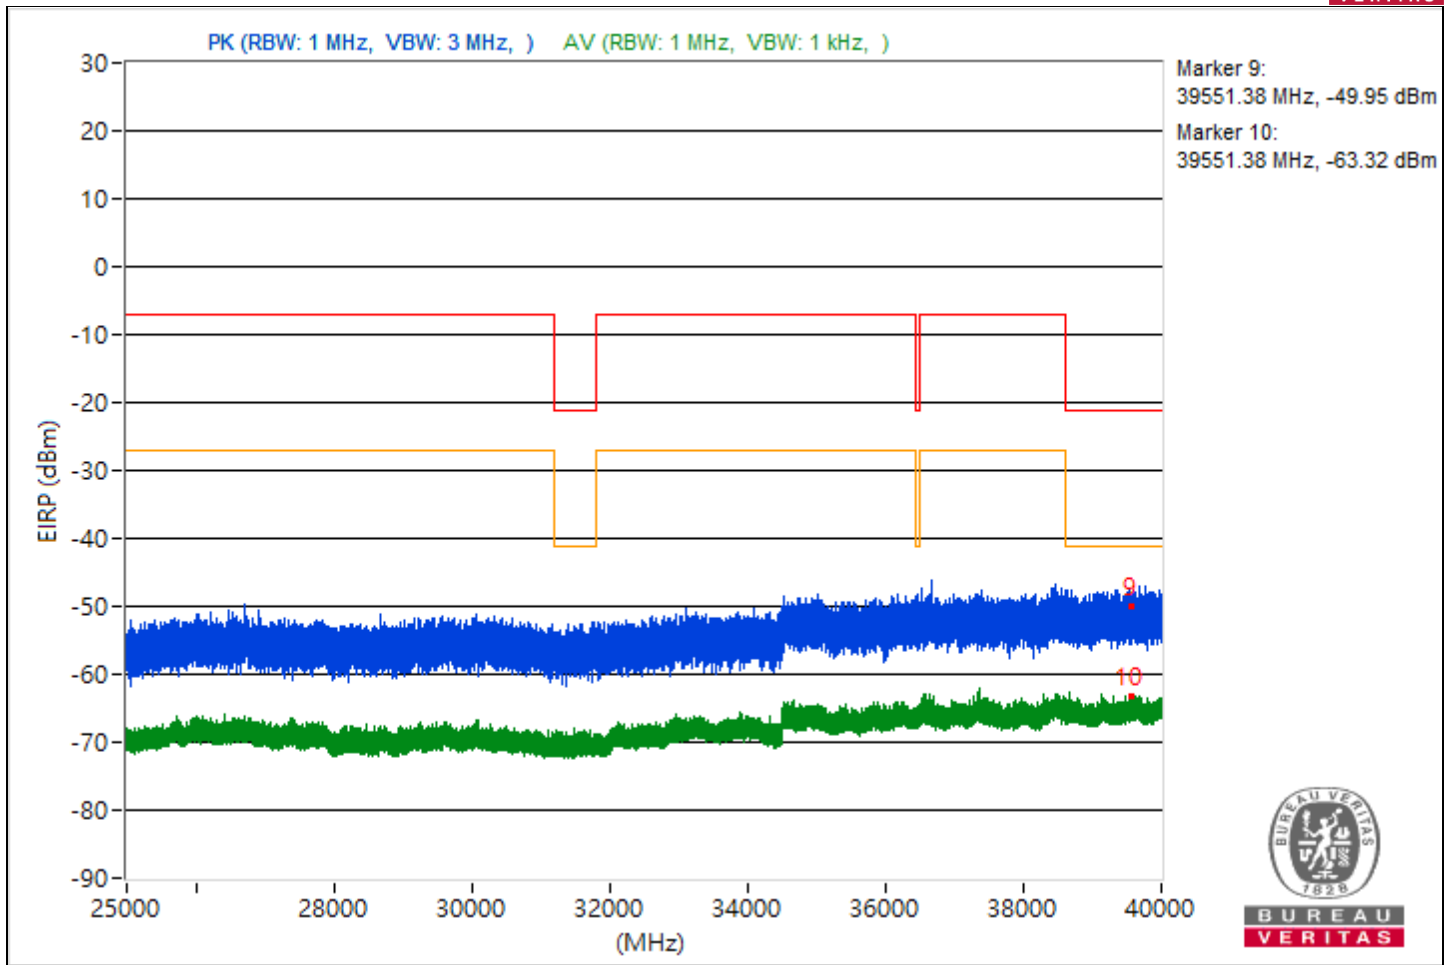


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5450.91	49.31 PK	74	-24.69	-57.24	-57.42	8.37	-45.95
2	5450.91	41.97 AV	54	-12.03	-65.2	-64.2	8.37	-53.29
3	11983.91	47.2 PK	74	-26.8	-61.11	-58.24	8.37	-48.06
4	11983.91	38.67 AV	54	-15.33	-67.08	-69.09	8.37	-56.59
5	21135.5	47.55 PK	74	-26.45	-60.75	-57.89	8.37	-47.71
6	21135.5	35.76 AV	54	-18.24	-73.04	-69.44	8.37	-59.5
7	23935.2	51.62 PK	74	-22.38	-56.47	-53.94	8.37	-43.64
8	23935.2	37.01 AV	54	-16.99	-71.48	-68.33	8.37	-58.25
9	39983.29	44.95 PK	74	-29.05	-62.18	-61.24	8.37	-50.31
10	39983.29	32.54 AV	54	-21.46	-72.74	-76.1	8.37	-62.72

Note: Margin value = Emission Level - Limit value

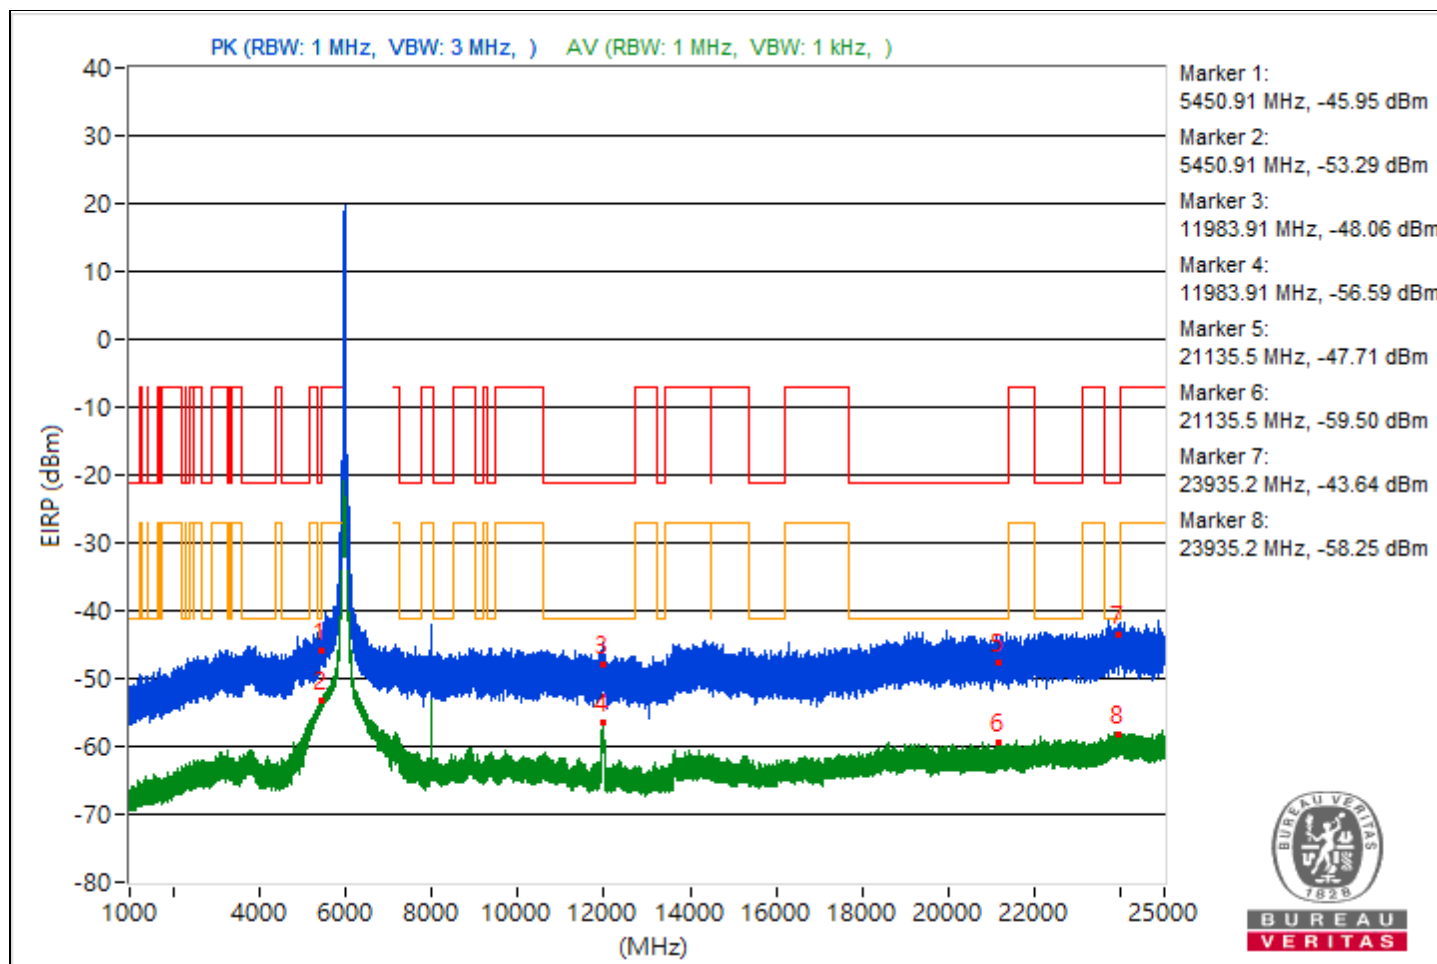


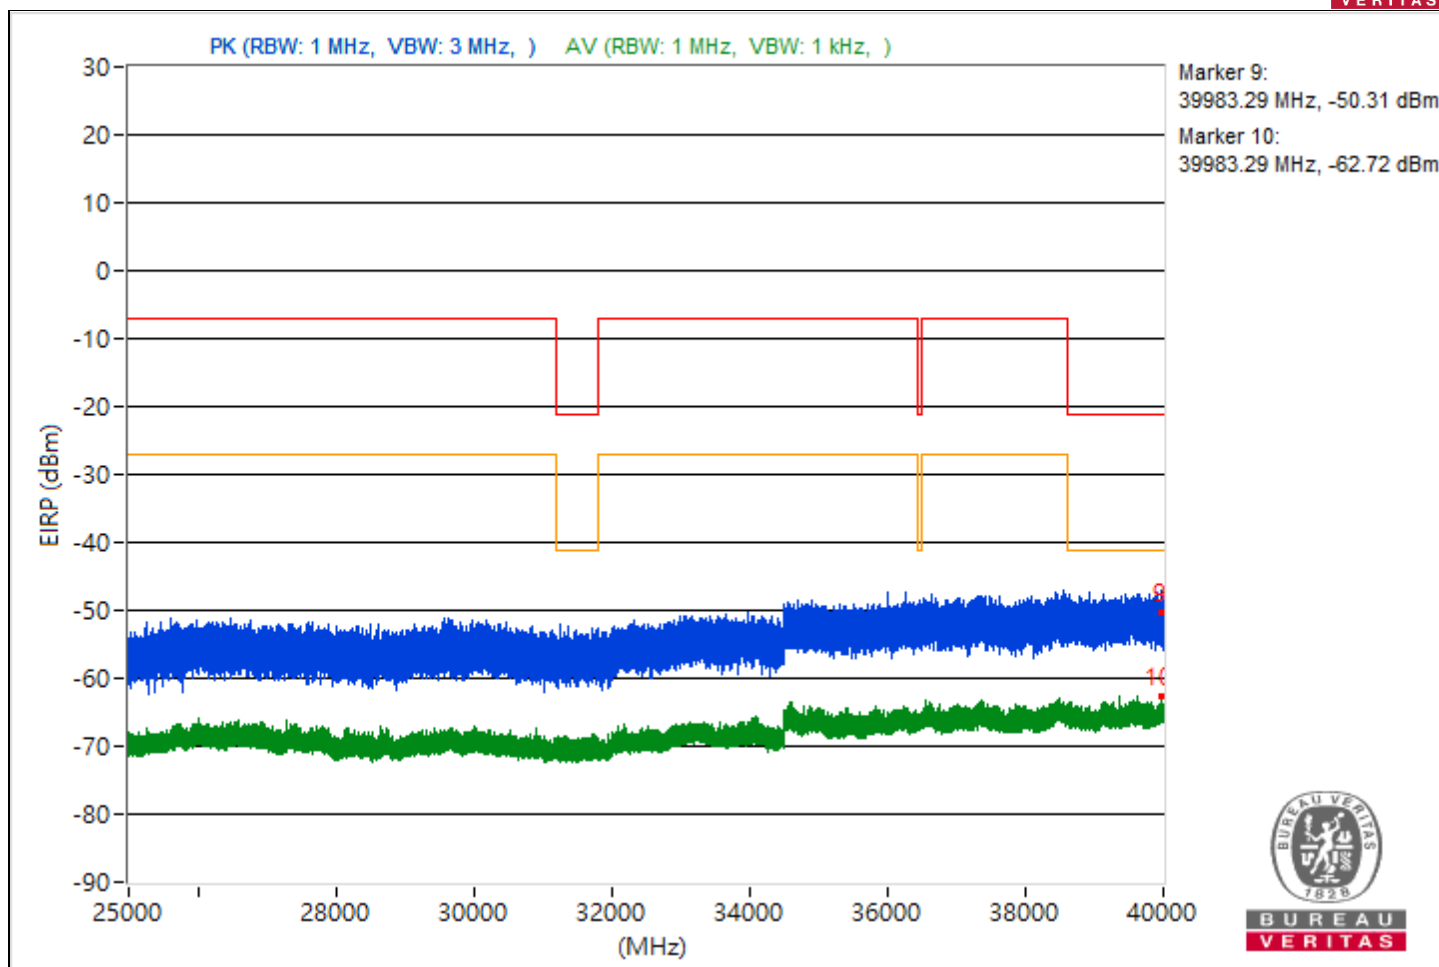

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.14	49.58 PK	74	-24.42	-56.82	-57.31	8.37	-45.68
2	5451.14	41.03 AV	54	-12.97	-65.37	-65.86	8.37	-54.23
3	8193.24	52.54 PK	74	-21.46	-51.83	-59.16	8.37	-42.72
4	8193.24	47.45 AV	54	-6.55	-56.39	-69.37	8.37	-47.81
5	19481.6	48.78 PK	74	-25.22	-59.33	-56.77	8.37	-46.48
6	19481.6	35.69 AV	54	-18.31	-73.31	-69.42	8.37	-59.57
7	22181.7	49.21 PK	74	-24.79	-58.26	-56.73	8.37	-46.05
8	22181.7	37.52 AV	54	-16.48	-70.85	-67.89	8.37	-57.74
9	39928.62	45.49 PK	74	-28.51	-59.35	-64.27	8.37	-49.77
10	39928.62	32.94 AV	54	-21.06	-74.19	-73.26	8.37	-62.32

Note: Margin value = Emission Level - Limit value

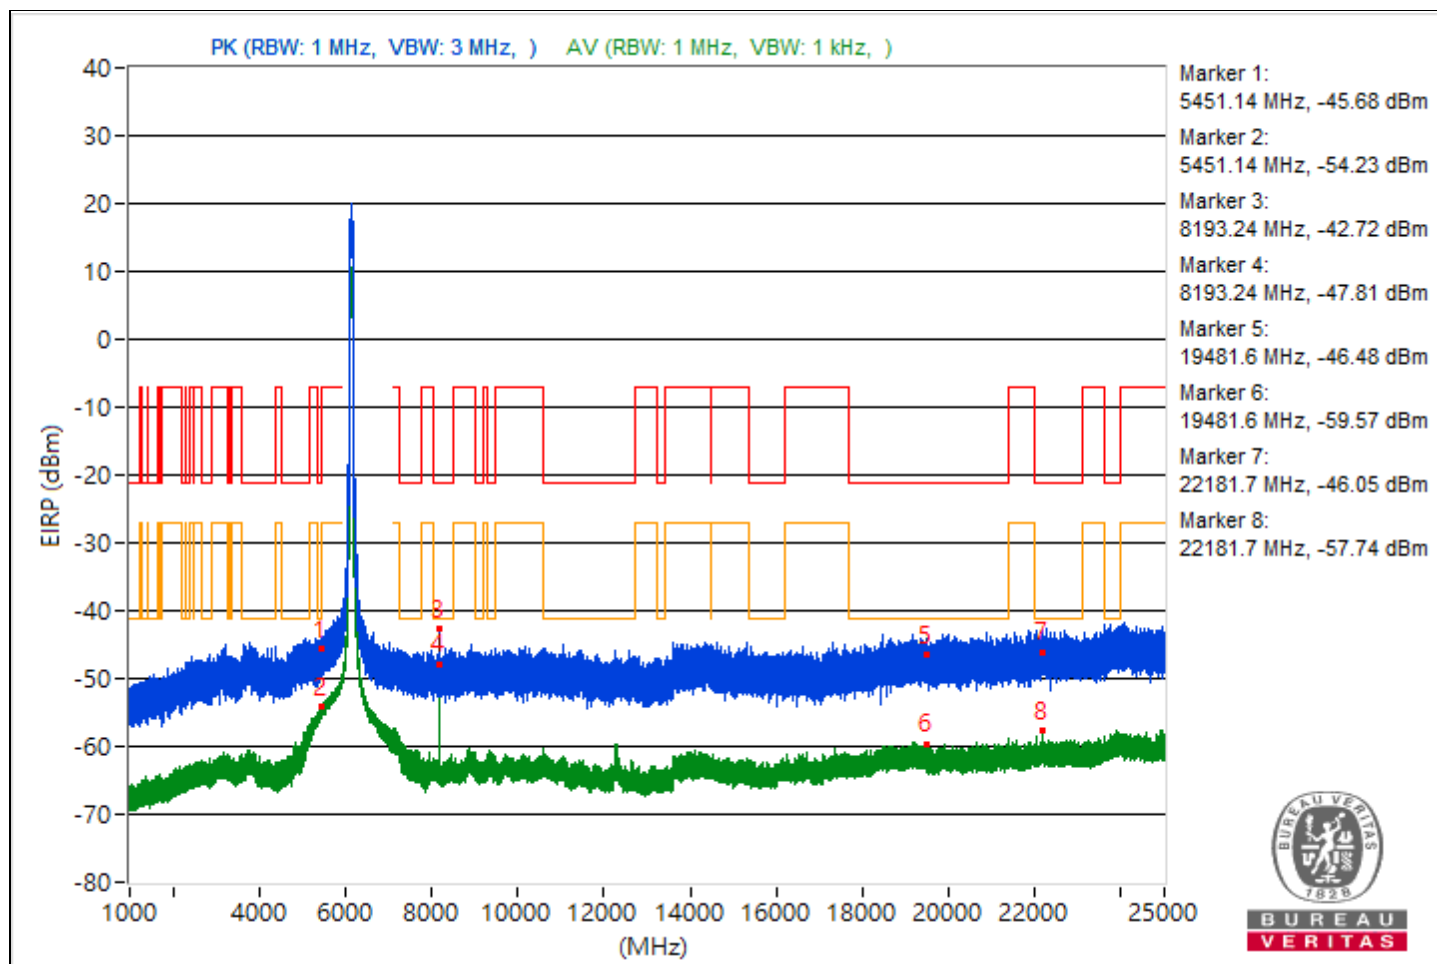





RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.2	47.66 PK	74	-26.34	-59.18	-58.79	8.37	-47.6
2	5456.2	40.42 AV	54	-13.58	-65.99	-66.46	8.37	-54.84
3	7282.97	47.97 PK	74	-26.03	-59.43	-58.03	8.37	-47.29
4	7282.97	37.58 AV	54	-16.42	-69.68	-68.51	8.37	-57.68
5	21203.4	47.63 PK	74	-26.37	-59.39	-58.66	8.37	-47.63
6	21203.4	36.04 AV	54	-17.96	-69.13	-72.83	8.37	-59.22
7	23928.2	49.45 PK	74	-24.55	-56.95	-57.44	8.37	-45.81
8	23928.2	37.48 AV	54	-16.52	-71.73	-67.55	8.37	-57.78
9	39595.11	42.44 PK	74	-31.56	-66.19	-62.84	8.37	-52.82
10	39595.11	31.93 AV	54	-22.07	-76.7	-73.34	8.37	-63.33

Note: Margin value = Emission Level - Limit value

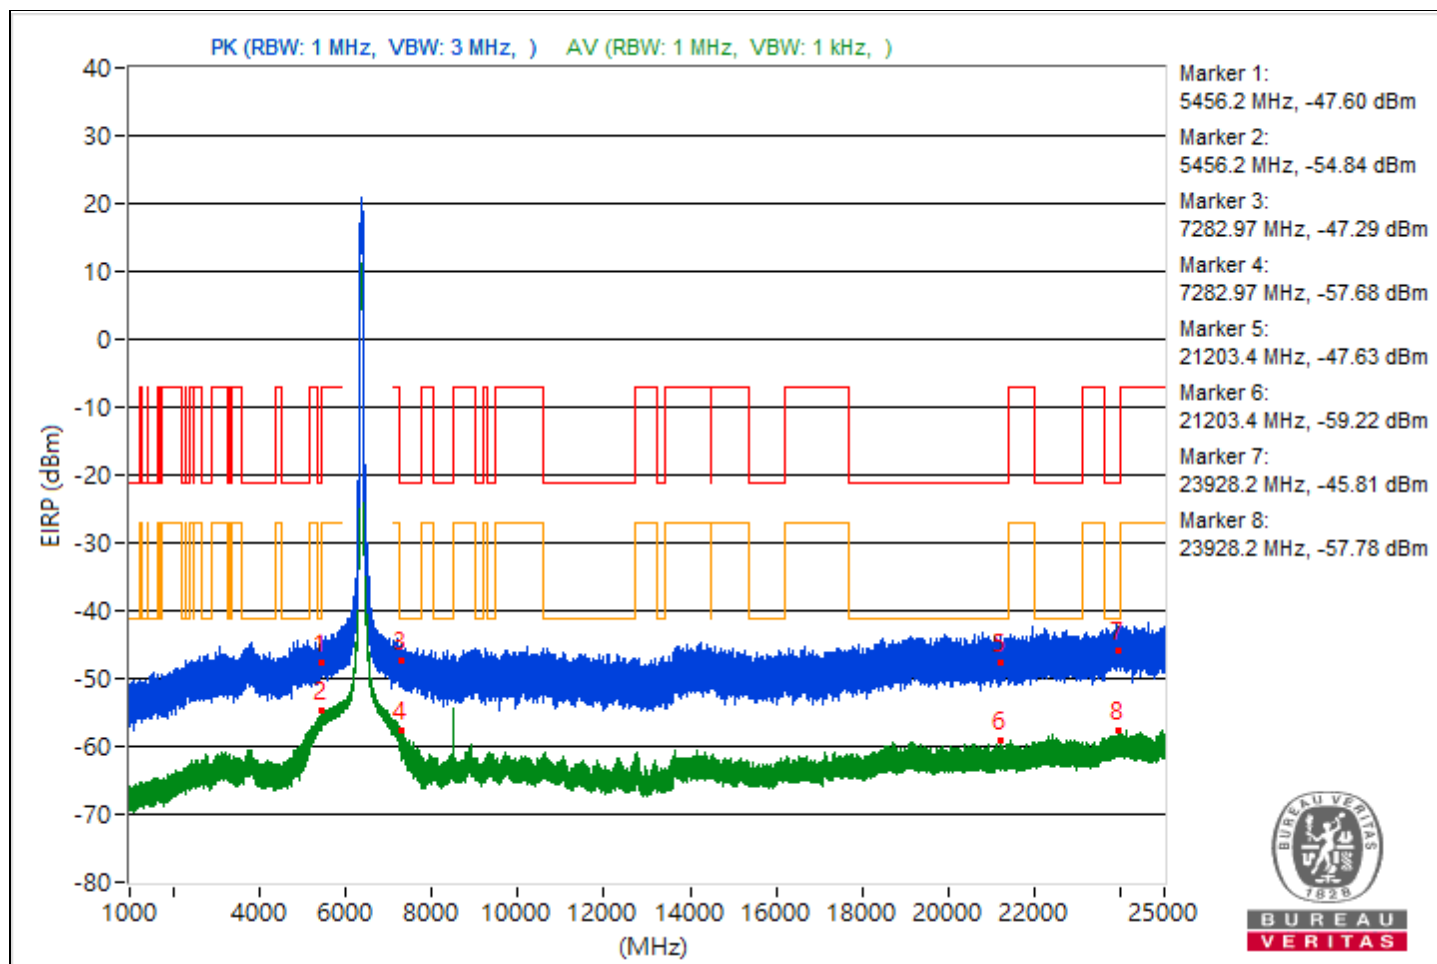


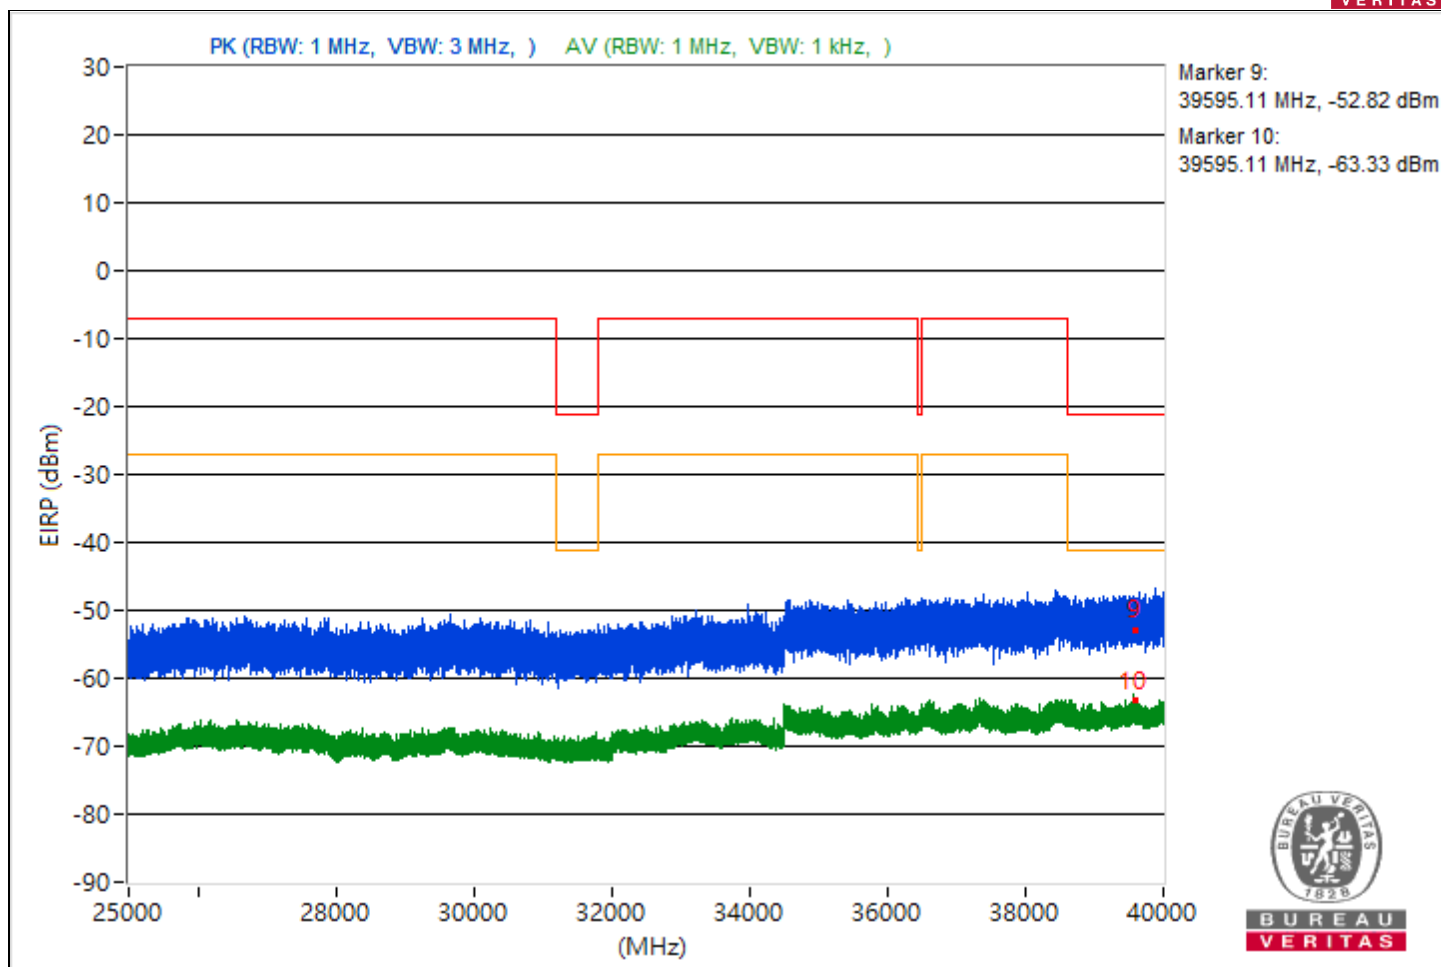


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5447.33	47.02 PK	74	-26.98	-58.71	-60.76	8.37	-48.24
2	5447.33	38.88 AV	54	-15.12	-68.51	-67.12	8.37	-56.38
3	7250.46	47.94 PK	74	-26.06	-58.97	-58.45	8.37	-47.32
4	7250.46	38.49 AV	54	-15.51	-67.48	-68.94	8.37	-56.77
5	18651.7	47.85 PK	74	-26.15	-59.31	-58.31	8.37	-47.41
6	18651.7	35.37 AV	54	-18.63	-74.38	-69.48	8.37	-59.89
7	23784.4	48.28 PK	74	-25.72	-60.92	-56.77	8.37	-46.98
8	23784.4	37.35 AV	54	-16.65	-67.96	-71.21	8.37	-57.91
9	39544.53	45.3 PK	74	-28.7	-60.18	-62.92	8.37	-49.96
10	39544.53	32.82 AV	54	-21.18	-76.41	-72.21	8.37	-62.44

Note: Margin value = Emission Level - Limit value

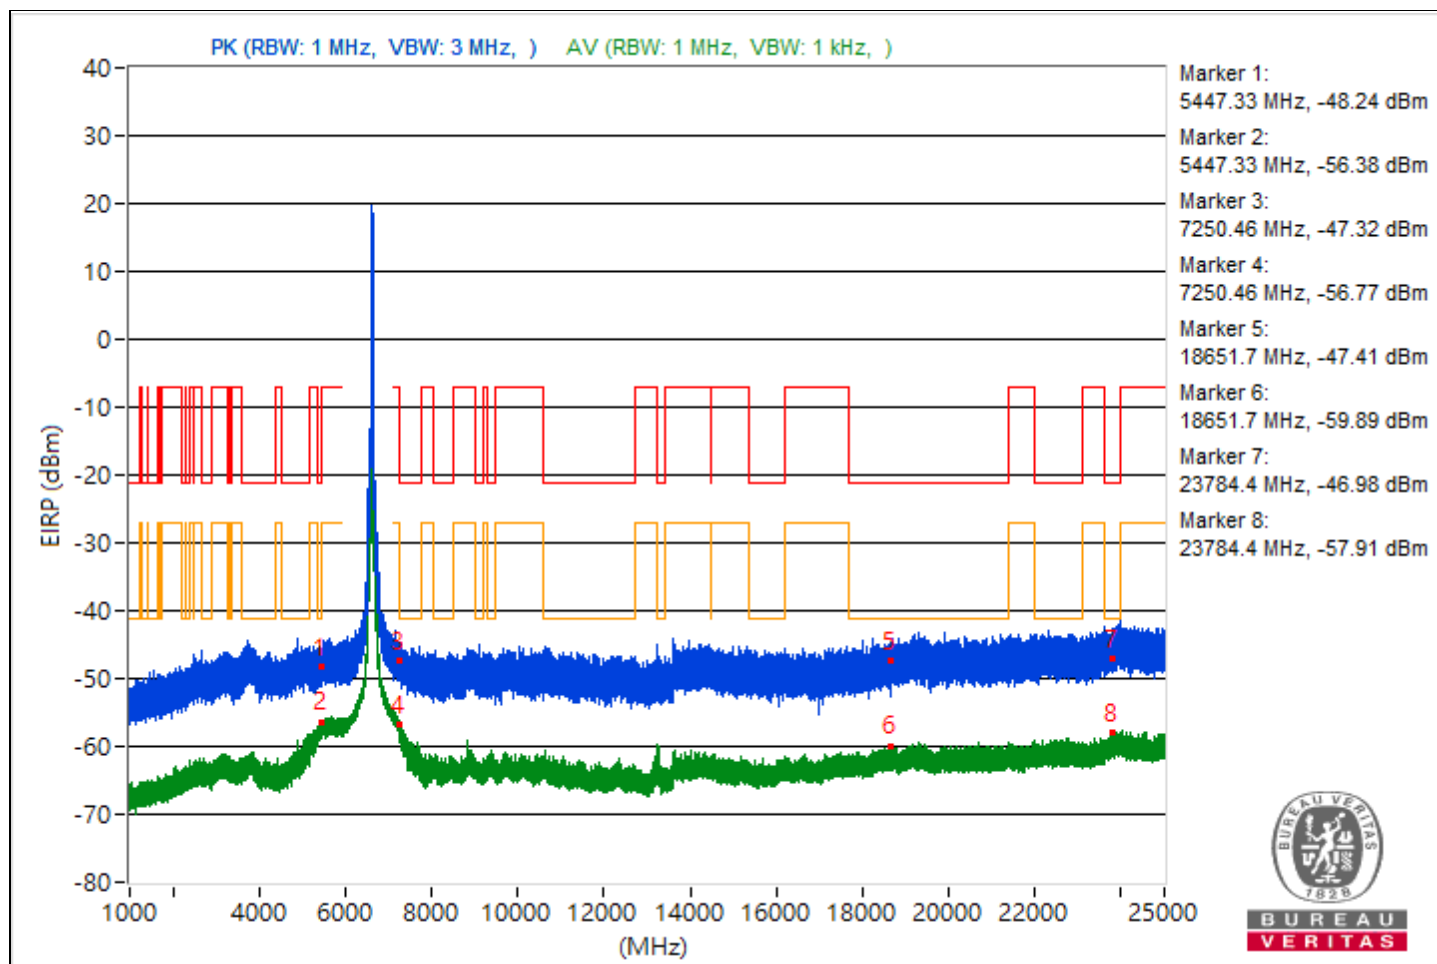


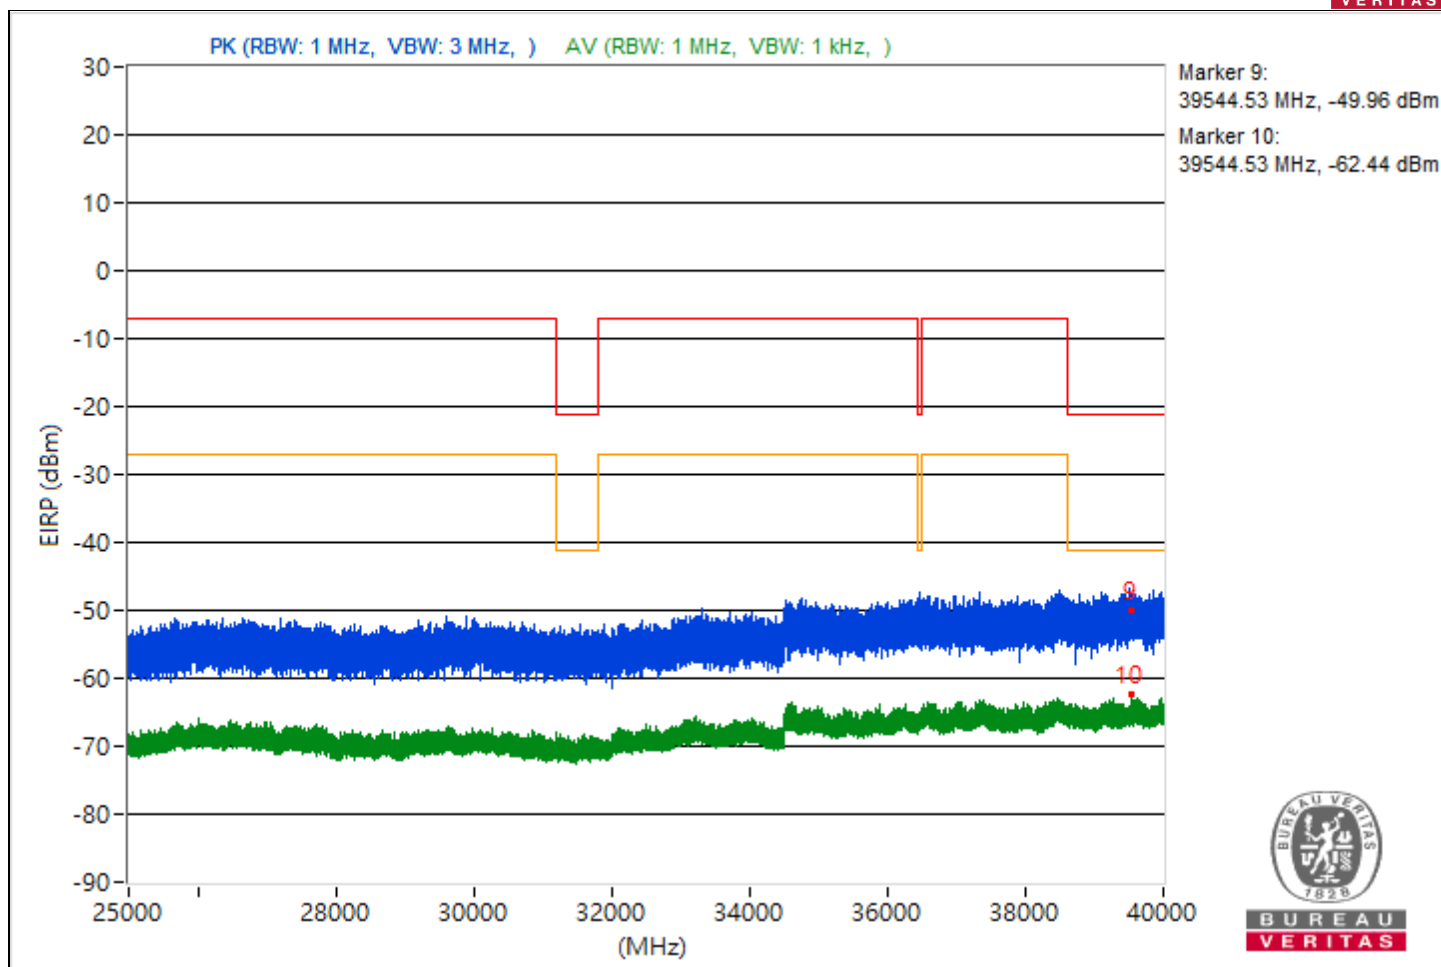


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.91	46 PK	74	-28	-59.64	-61.93	8.37	-49.26
2	5457.91	38.45 AV	54	-15.55	-68.63	-67.79	8.37	-56.81
3	7251.93	47.77 PK	74	-26.23	-58.51	-59.26	8.37	-47.49
4	7251.93	39.36 AV	54	-14.64	-67.76	-66.86	8.37	-55.9
5	21282.2	46.75 PK	74	-27.25	-58.47	-62.03	8.37	-48.51
6	21282.2	35.9 AV	54	-18.1	-69.28	-72.97	8.37	-59.36
7	23892.4	49.51 PK	74	-24.49	-56.02	-58.6	8.37	-45.75
8	23892.4	37.3 AV	54	-16.7	-71.35	-67.98	8.37	-57.96
9	39972.27	44.23 PK	74	-29.77	-62.4	-62.41	8.37	-51.03
10	39972.27	32.48 AV	54	-21.52	-72.65	-76.51	8.37	-62.78

Note: Margin value = Emission Level - Limit value

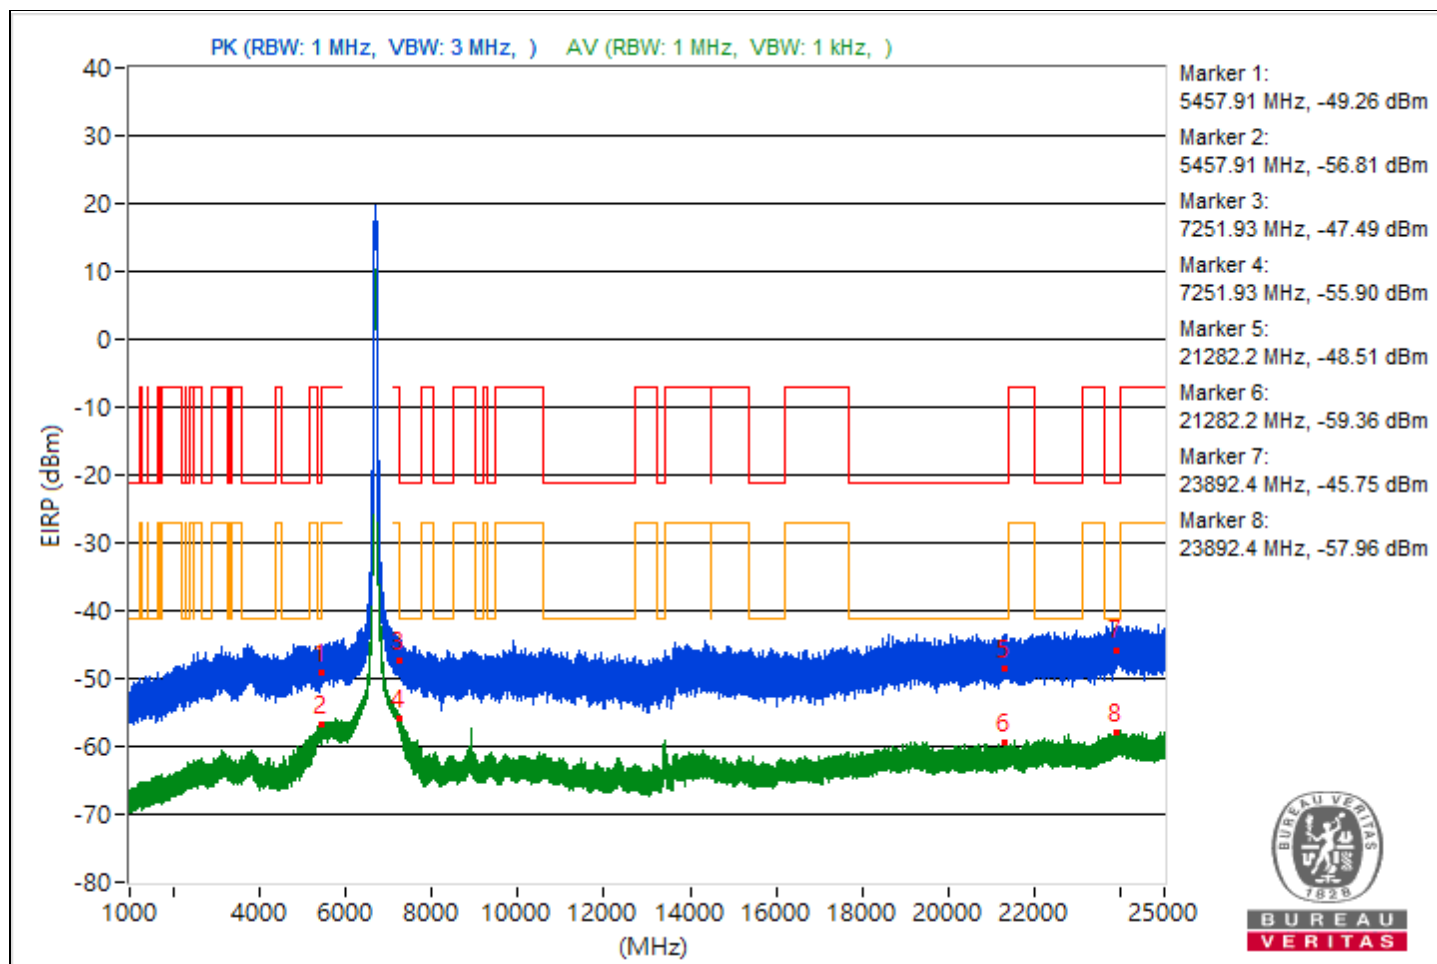


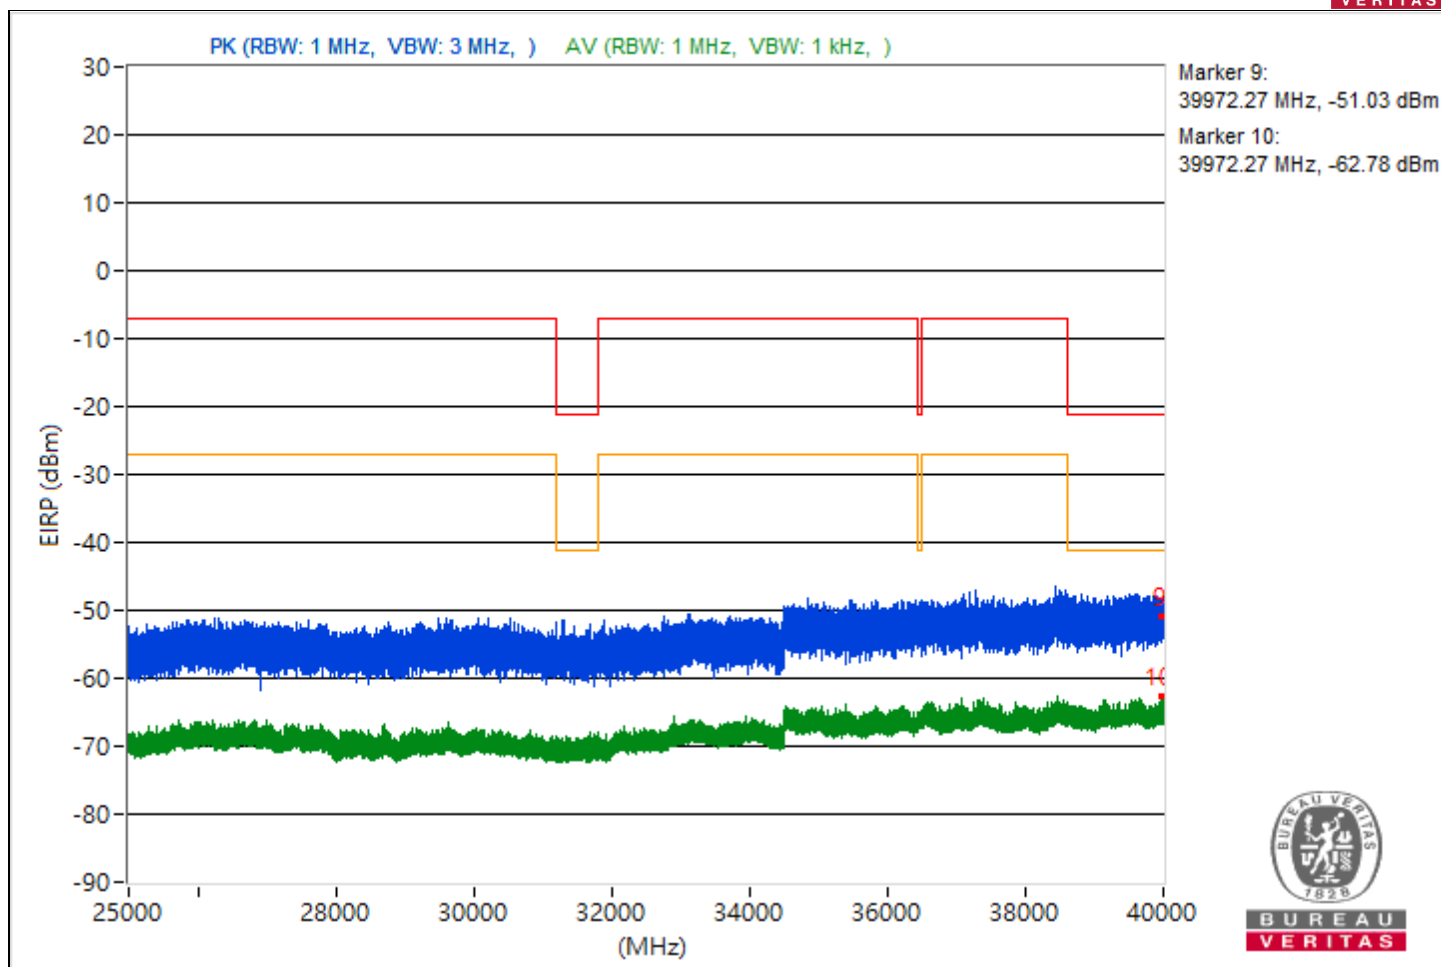


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5440.49	48.59 PK	74	-25.41	-57.15	-59.2	8.37	-46.67
2	5440.49	37.93 AV	54	-16.07	-69.71	-67.9	8.37	-57.33
3	7266.24	50.67 PK	74	-23.33	-57.95	-54.62	8.37	-44.59
4	7266.24	40.09 AV	54	-13.91	-66.81	-66.31	8.37	-55.17
5	19127.5	46.61 PK	74	-27.39	-60.49	-59.62	8.37	-48.65
6	19127.5	35.45 AV	54	-18.55	-69.63	-73.65	8.37	-59.81
7	23980.7	48.18 PK	74	-25.82	-58.14	-58.8	8.37	-47.08
8	23980.7	38.07 AV	54	-15.93	-67.73	-69.62	8.37	-57.19
9	39575.82	41.42 PK	74	-32.58	-67.31	-63.81	8.37	-53.84
10	39575.82	32.1 AV	54	-21.9	-76.81	-73.06	8.37	-63.16

Note: Margin value = Emission Level - Limit value

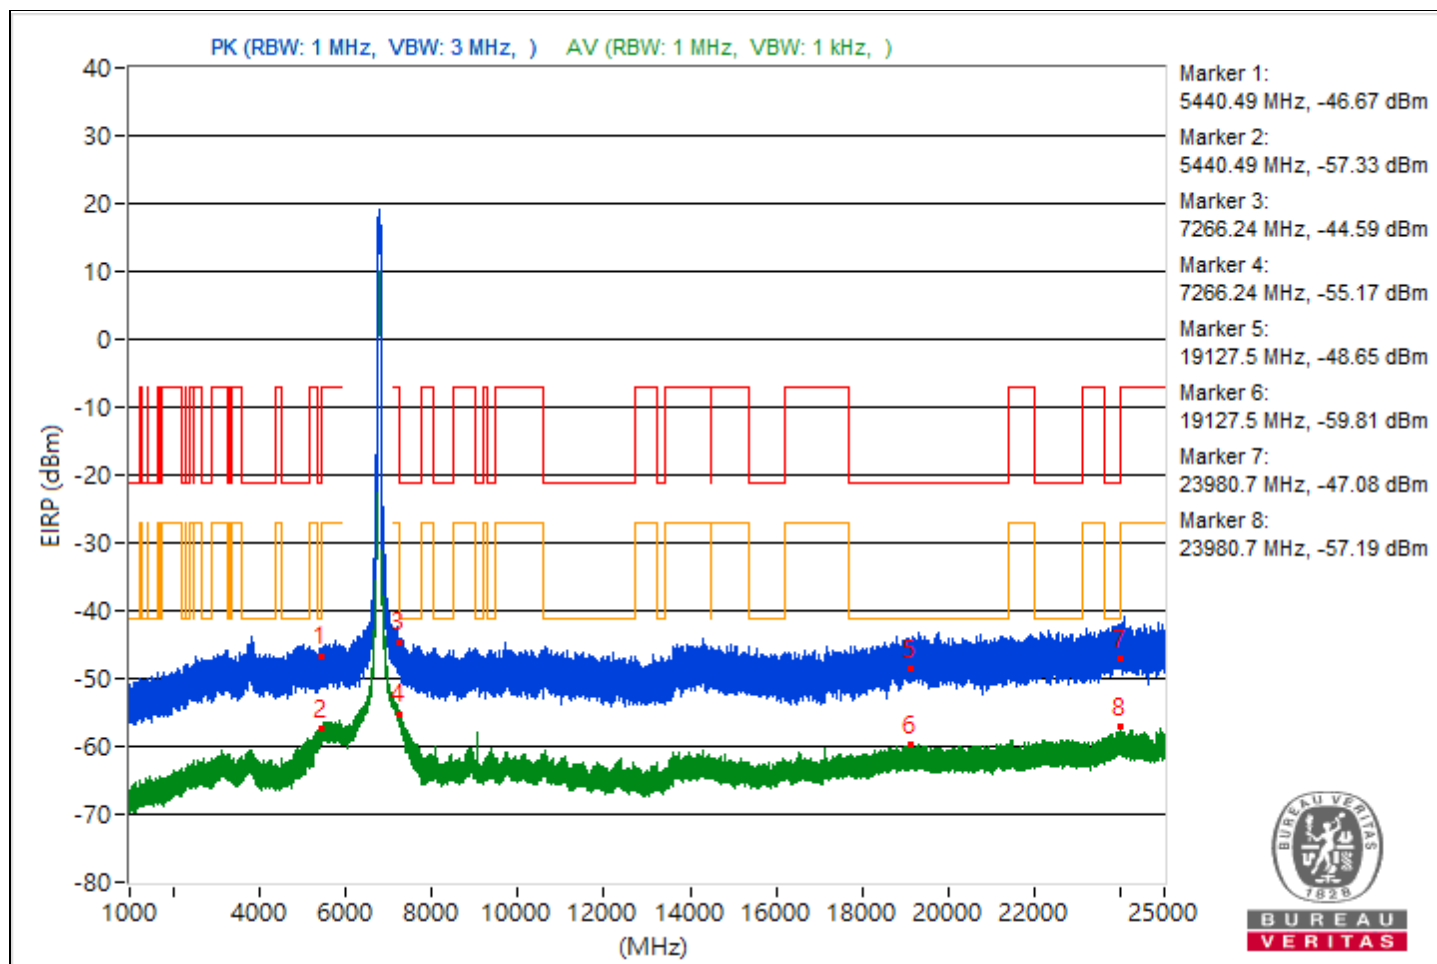

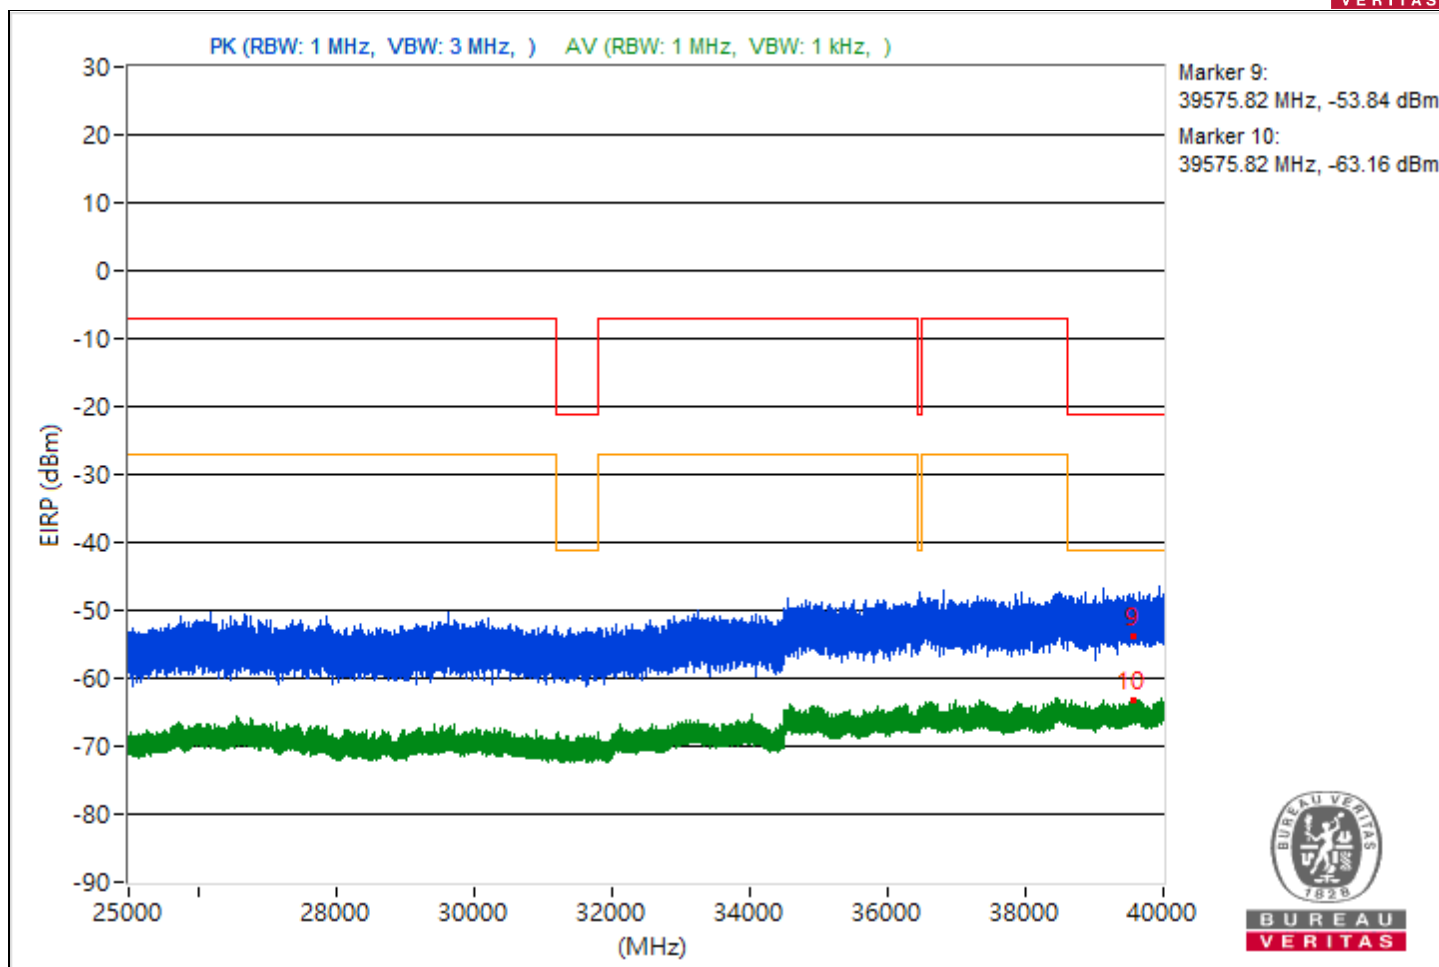



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5874.72	67.27 PK	88.26	-20.99	-39.33	-39.4	8.37	-27.99
2	#5874.72	59.96 AV	68.26	-8.3	-46.24	-47.16	8.37	-35.3
3	8033.33	52.61 PK	74	-21.39	-51.98	-58.06	8.37	-42.65
4	8033.33	49.08 AV	54	-4.92	-54.77	-67.62	8.37	-46.18
5	21136.7	50.4 PK	74	-23.6	-55.4	-57.29	8.37	-44.86
6	21136.7	36.24 AV	54	-17.76	-72.35	-69.06	8.37	-59.02
7	23932.8	49.35 PK	74	-24.65	-57.54	-57.05	8.37	-45.91
8	23932.8	37.73 AV	54	-16.27	-67.35	-71.36	8.37	-57.53
9	39627.2	45.16 PK	74	-28.84	-63.56	-60.08	8.37	-50.1
10	39627.2	32.35 AV	54	-21.65	-73	-76.14	8.37	-62.91

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

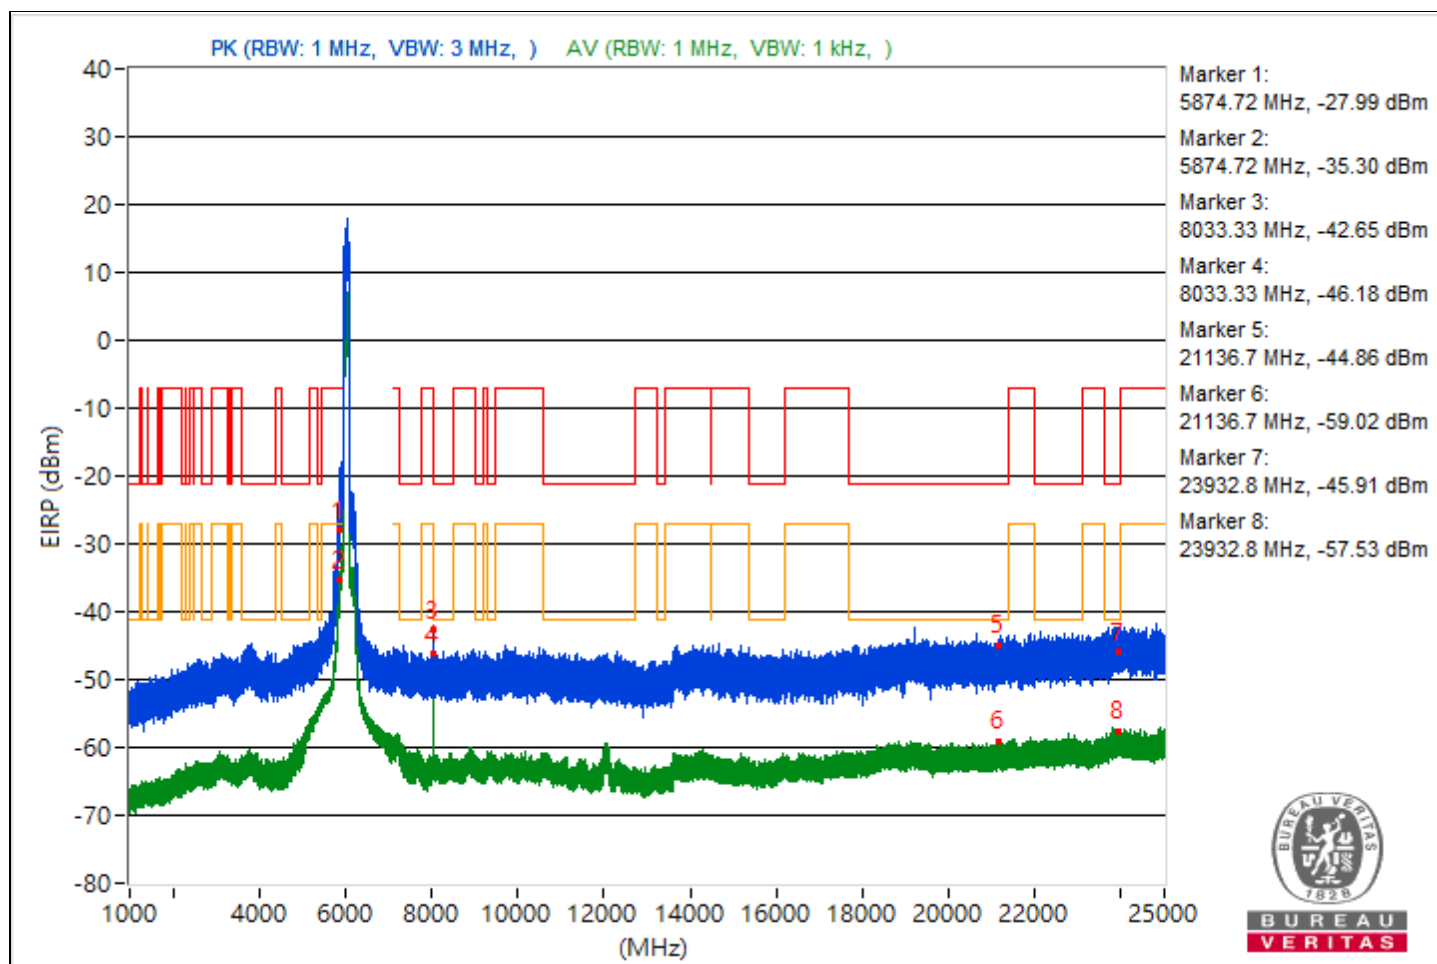


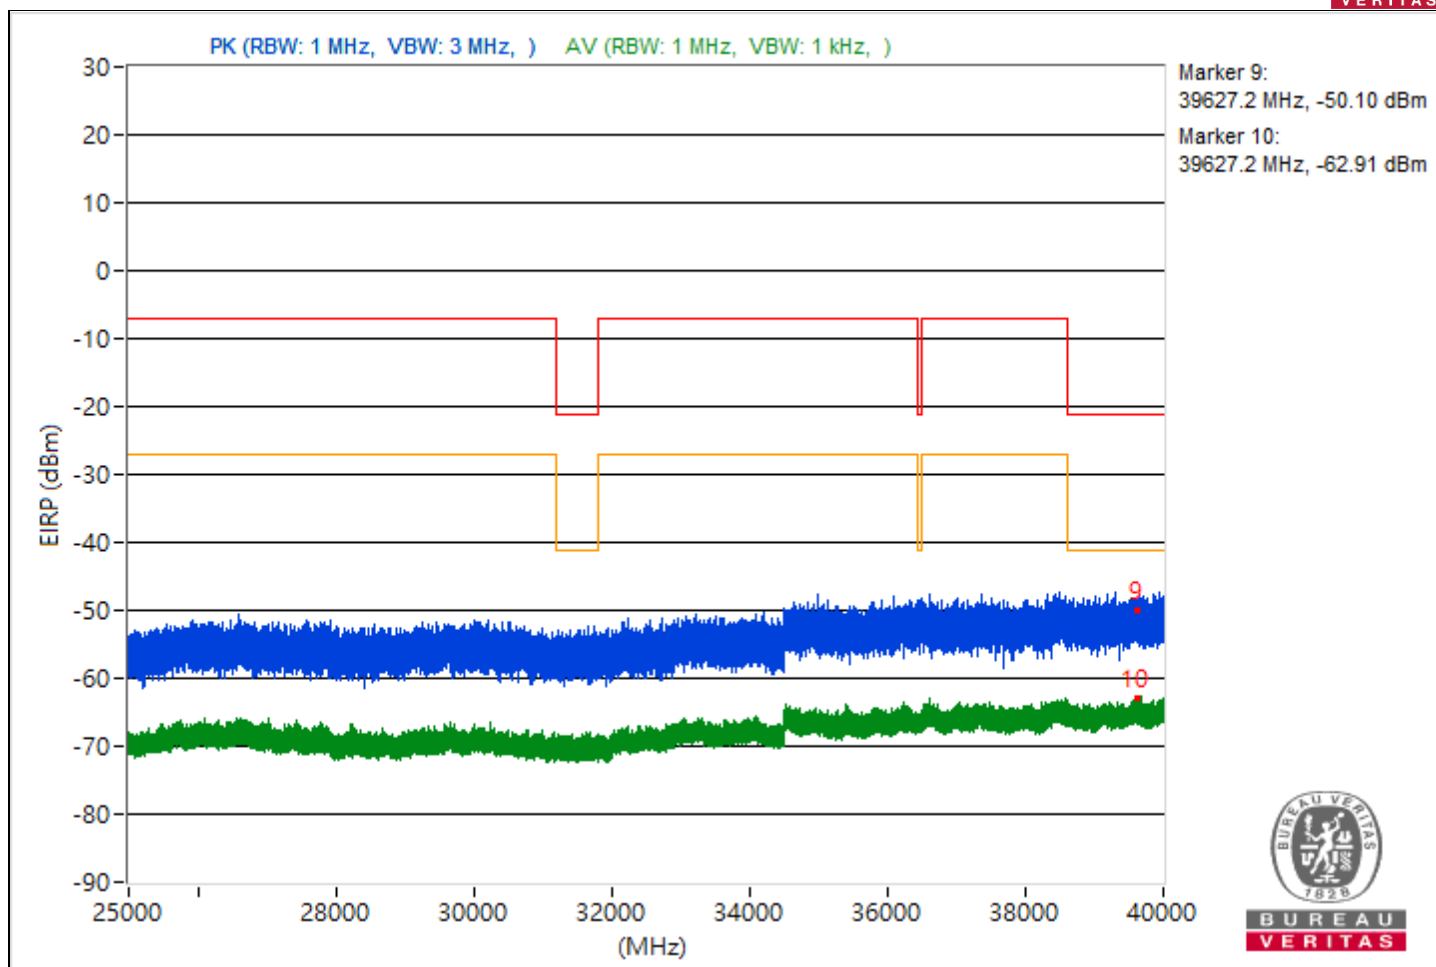


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5434.73	48.94 PK	74	-25.06	-57.11	-58.38	8.37	-46.32
2	5434.73	40.84 AV	54	-13.16	-66.29	-65.37	8.37	-54.42
3	8246.67	49.4 PK	74	-24.6	-55.69	-59.67	8.37	-45.86
4	8246.67	46.66 AV	54	-7.34	-57.24	-69.11	8.37	-48.6
5	21354.9	47.23 PK	74	-26.77	-58.6	-60.42	8.37	-48.03
6	21354.9	36.79 AV	54	-17.21	-71.54	-68.64	8.37	-58.47
7	23950.6	49.33 PK	74	-24.67	-57.34	-57.28	8.37	-45.93
8	23950.6	37.5 AV	54	-16.5	-67.38	-72.14	8.37	-57.76
9	39654.4	44.56 PK	74	-29.44	-63.13	-61.24	8.37	-50.7
10	39654.4	32.49 AV	54	-21.51	-72.99	-75.74	8.37	-62.77

Note: Margin value = Emission Level - Limit value

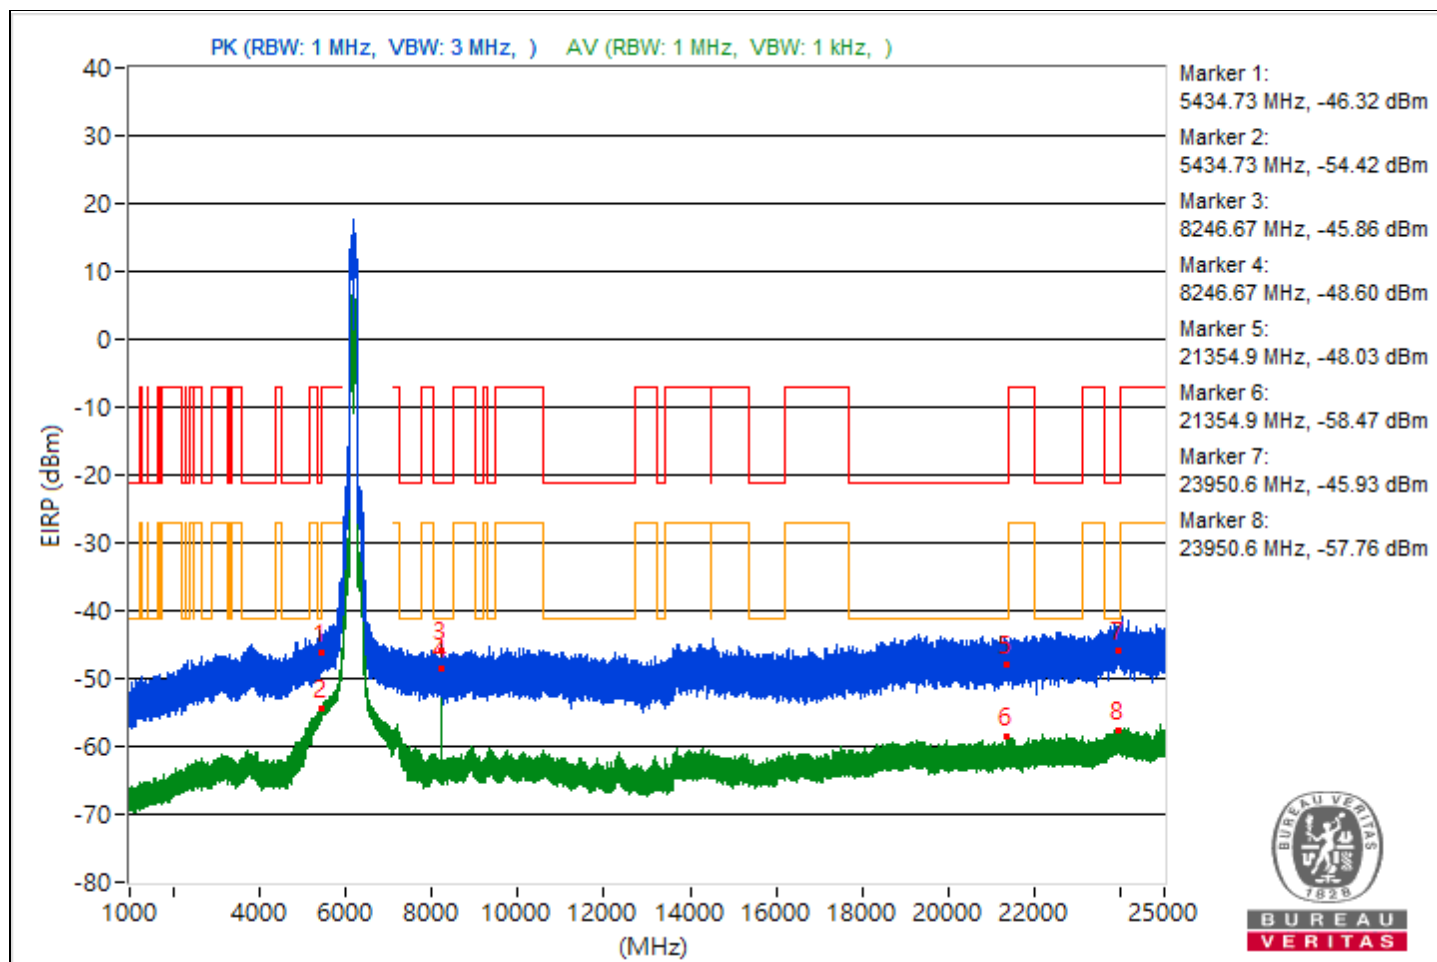


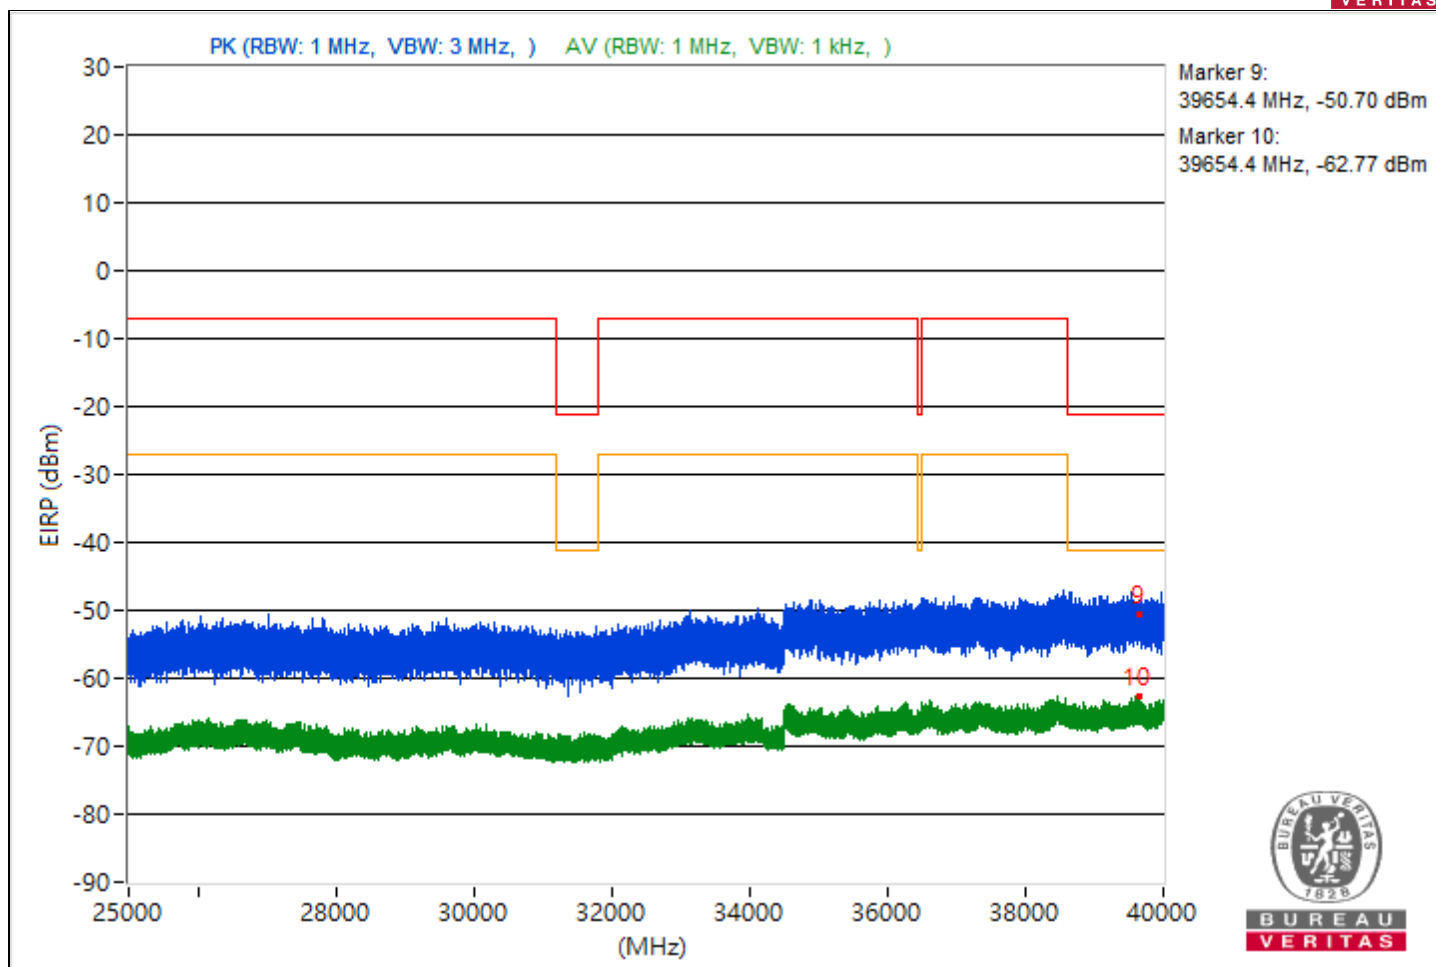

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.9	47.77 PK	74	-26.23	-60.76	-57.55	8.37	-47.49
2	5456.9	40.13 AV	54	-13.87	-67.11	-65.99	8.37	-55.13
3	8459.91	47.48 PK	74	-26.52	-58.1	-60.55	8.37	-47.78
4	8459.91	42.98 AV	54	-11.02	-61.22	-69.71	8.37	-52.28
5	19092.6	47.27 PK	74	-26.73	-60.55	-58.45	8.37	-47.99
6	19092.6	36.02 AV	54	-17.98	-69.15	-72.86	8.37	-59.24
7	23923.5	50.21 PK	74	-23.79	-58.03	-55.26	8.37	-45.05
8	23923.5	37.64 AV	54	-16.36	-67.44	-71.48	8.37	-57.62
9	38622.76	43.69 PK	74	-30.31	-62.24	-63.79	8.37	-51.57
10	38622.76	32.07 AV	54	-21.93	-76.95	-73.04	8.37	-63.19

Note: Margin value = Emission Level - Limit value

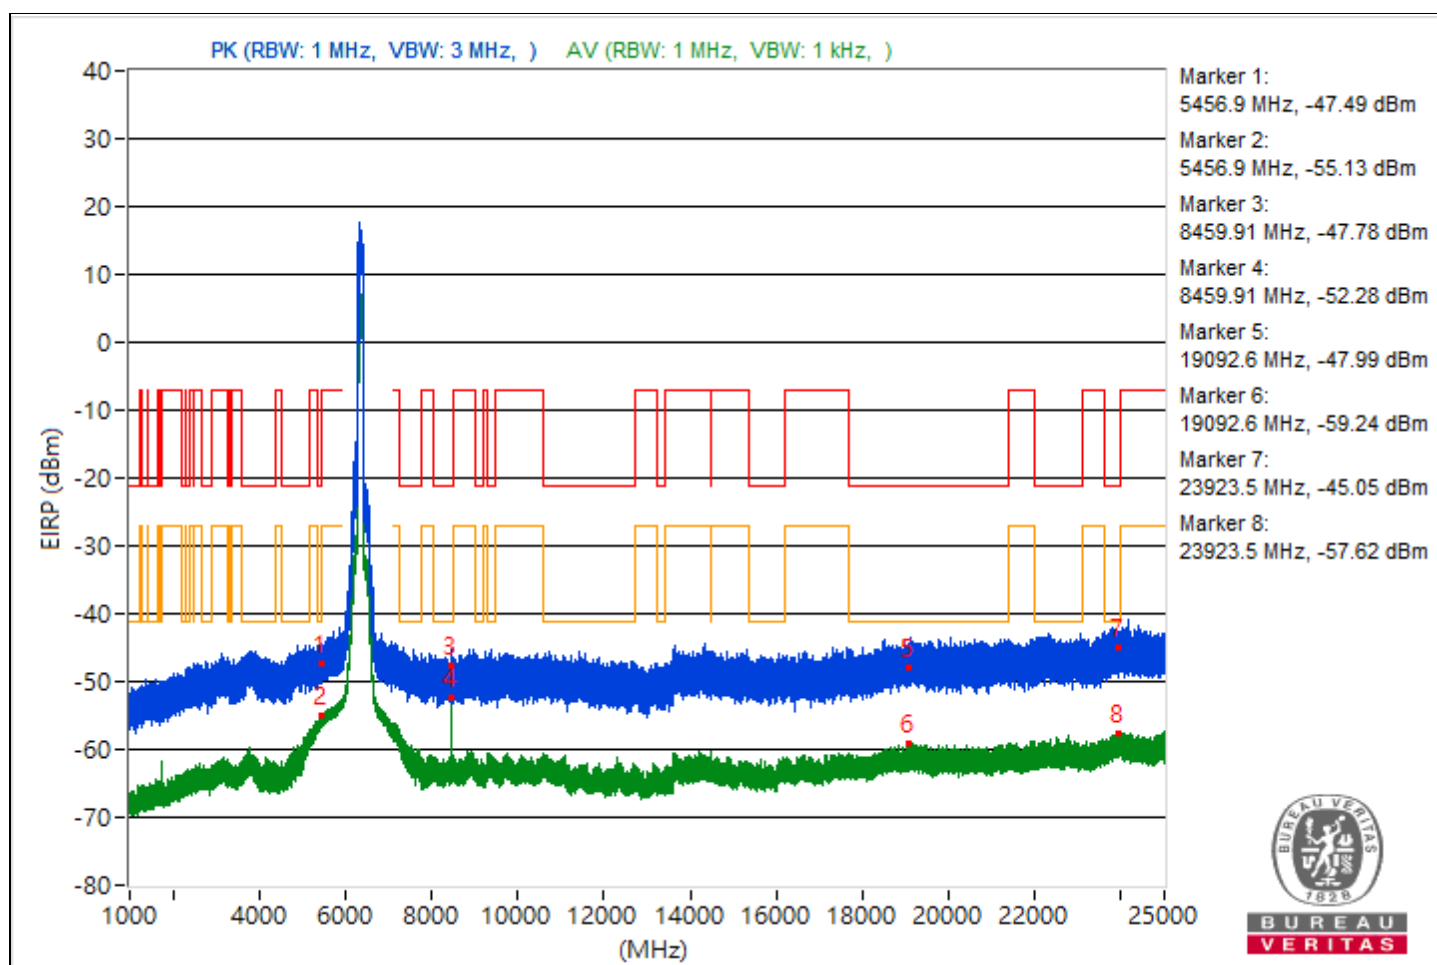





RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5413.34	48.59 PK	74	-25.41	-56.41	-60.72	8.37	-46.67
2	5413.34	38.99 AV	54	-15.01	-67.5	-67.8	8.37	-56.27
3	7256.13	47.4 PK	74	-26.6	-59.02	-59.48	8.37	-47.86
4	7256.13	39.08 AV	54	-14.92	-68.16	-67.04	8.37	-56.18
5	19408.5	47.34 PK	74	-26.66	-58.47	-60.33	8.37	-47.92
6	19408.5	36.02 AV	54	-17.98	-73.68	-68.84	8.37	-59.24
7	23832.5	50.57 PK	74	-23.43	-57.7	-54.89	8.37	-44.69
8	23832.5	37.89 AV	54	-16.11	-70.36	-67.57	8.37	-57.37
9	39642.4	46.09 PK	74	-27.91	-61.04	-60.11	8.37	-49.17
10	39642.4	32.64 AV	54	-21.36	-72.78	-75.7	8.37	-62.62

Note: Margin value = Emission Level - Limit value

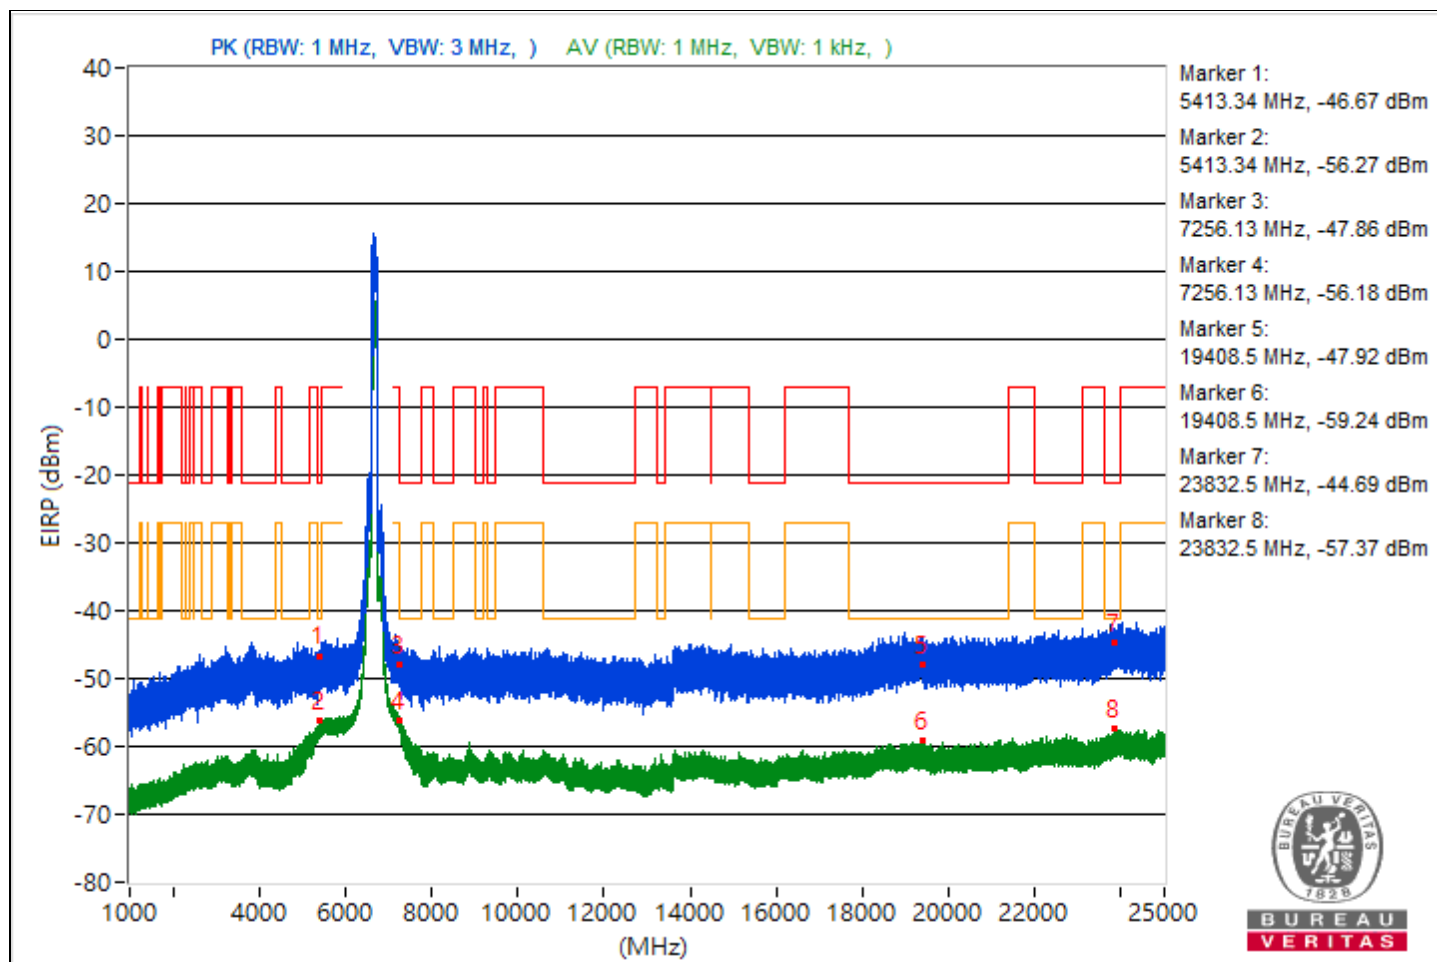

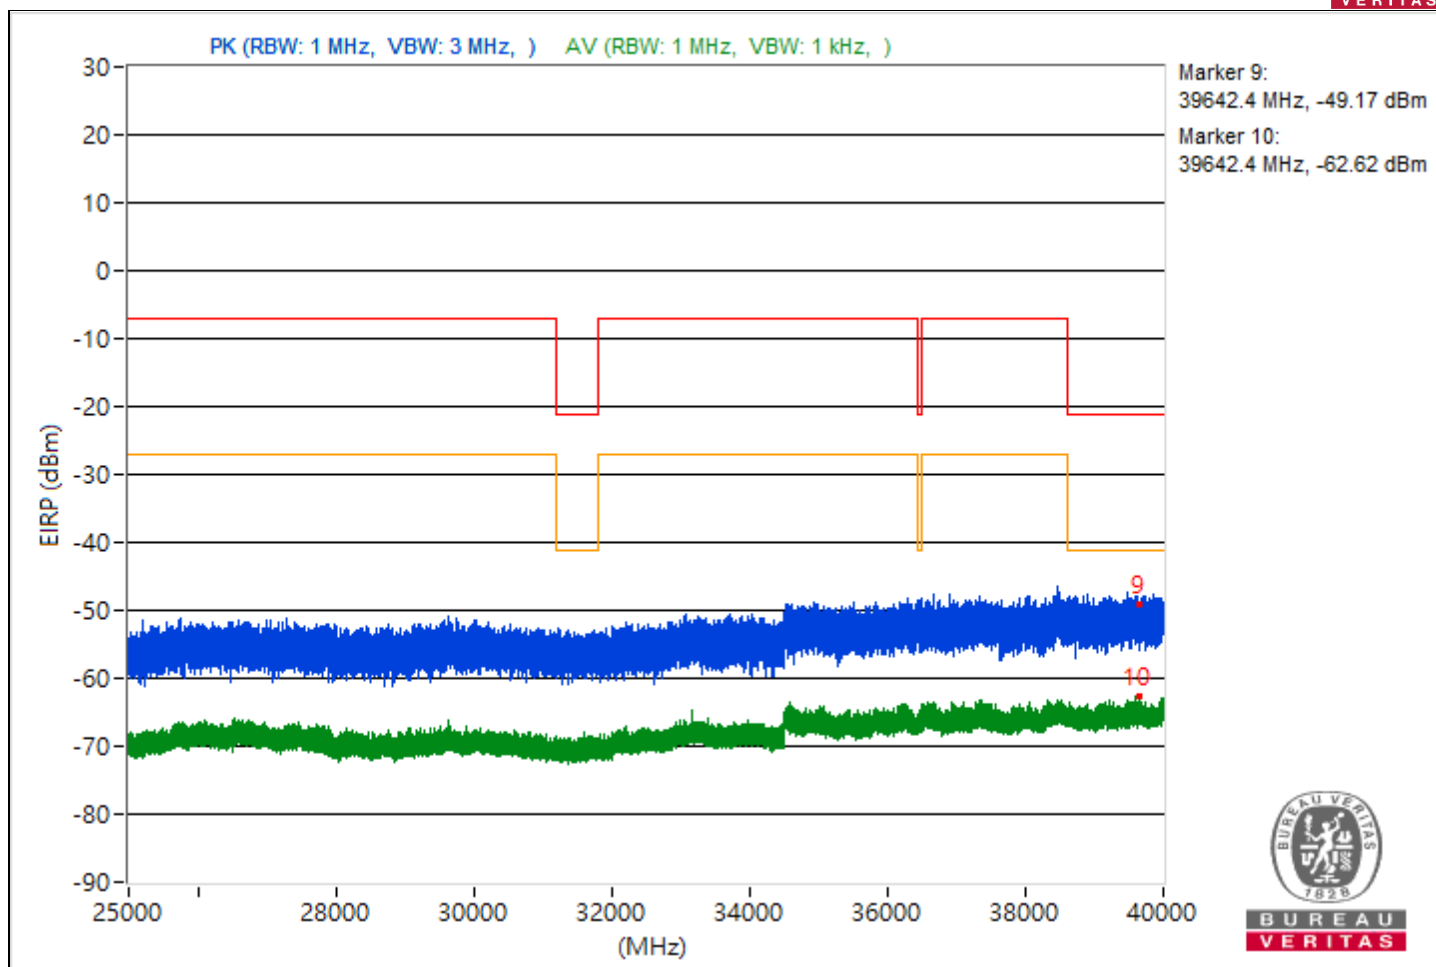



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.47	45.66 PK	74	-28.34	-61.6	-60.43	8.37	-49.6
2	5459.47	39.37 AV	54	-14.63	-66.89	-67.68	8.37	-55.89
3	#7939.96	53.01 PK	88.26	-35.25	-51.35	-58.75	8.37	-42.25
4	#7939.96	49.14 AV	68.26	-19.12	-54.6	-70.62	8.37	-46.12
5	19187	46.9 PK	74	-27.1	-59.5	-60	8.37	-48.36
6	19187	37.6 AV	54	-16.4	-71.29	-67.56	8.37	-57.66
7	23910.9	51.05 PK	74	-22.95	-57.04	-54.51	8.37	-44.21
8	23910.9	38.83 AV	54	-15.17	-70.79	-66.06	8.37	-56.43
9	39395.29	44.94 PK	74	-29.06	-60.06	-64.36	8.37	-50.32
10	39395.29	33.42 AV	54	-20.58	-71.56	-75.95	8.37	-61.84

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

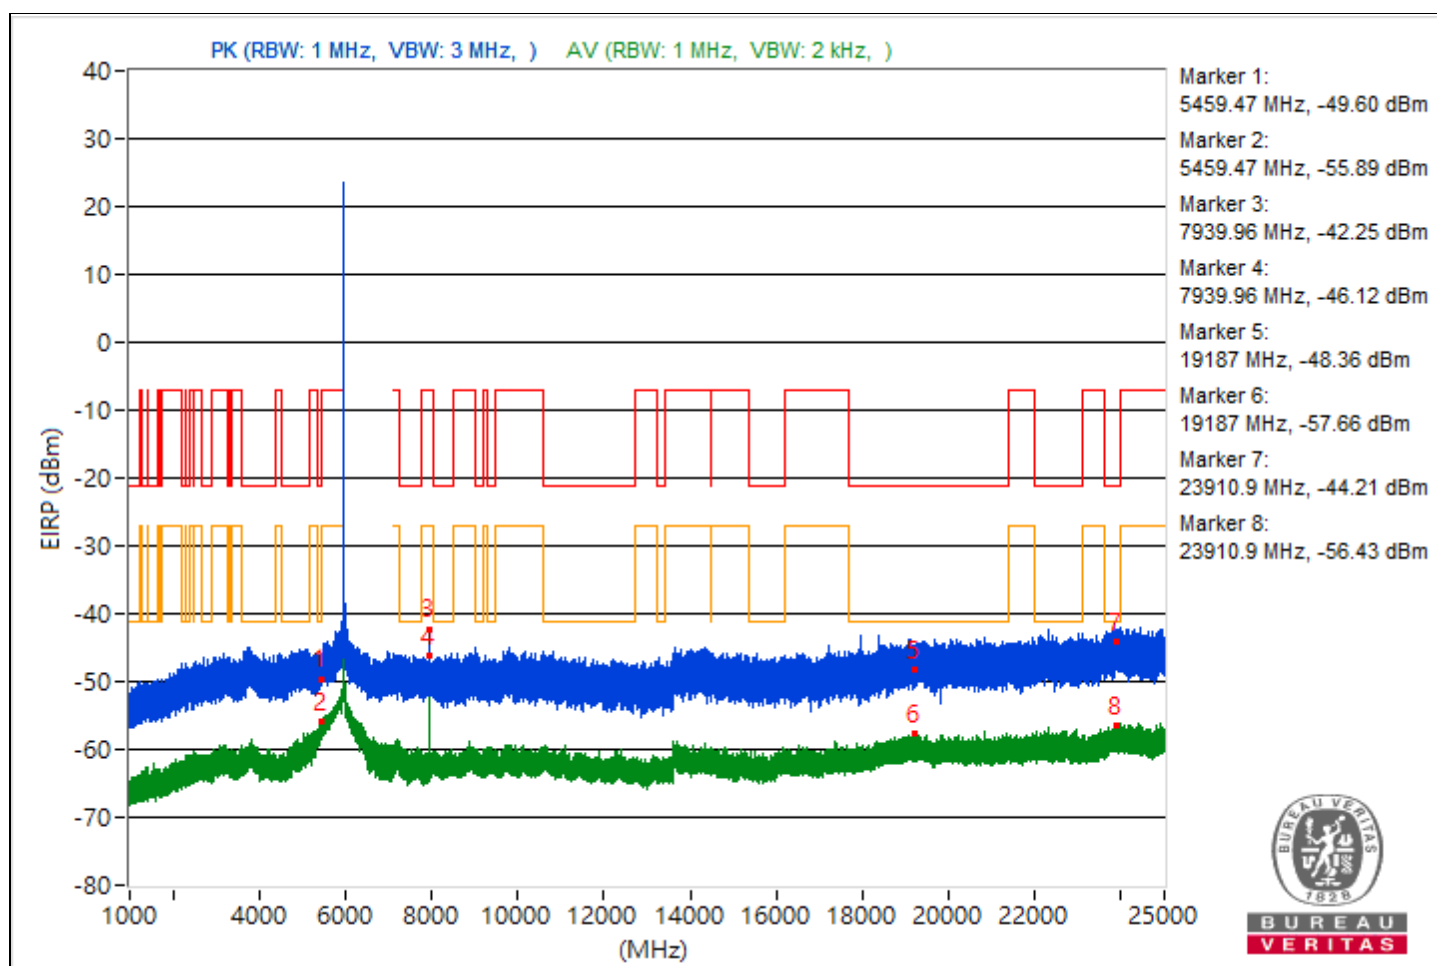


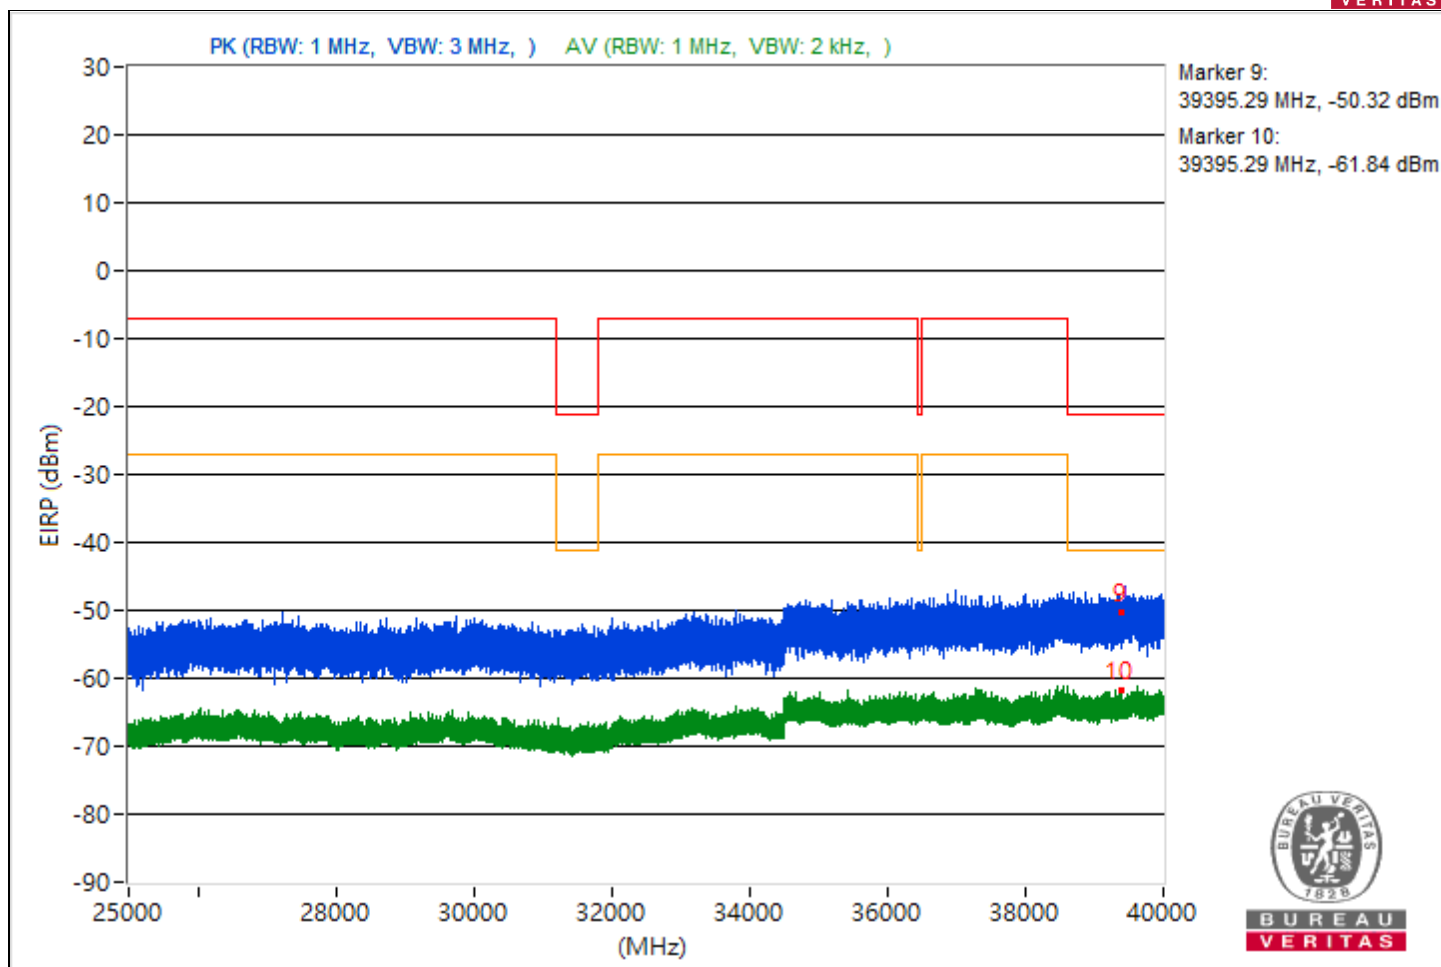


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5426.18	46.09 PK	74	-27.91	-60.39	-60.73	8.37	-49.17
2	5426.18	37.79 AV	54	-16.21	-68.36	-69.4	8.37	-57.47
3	7252.87	46.48 PK	74	-27.52	-61.13	-59.37	8.37	-48.78
4	7252.87	36.54 AV	54	-17.46	-69.32	-71.06	8.37	-58.72
5	21212.3	48.67 PK	74	-25.33	-61.24	-56.13	8.37	-46.59
6	21212.3	37.26 AV	54	-16.74	-72.42	-67.6	8.37	-58.00
7	23769.3	49.25 PK	74	-24.75	-59.03	-56.2	8.37	-46.01
8	23769.3	38.23 AV	54	-15.77	-66.68	-71.32	8.37	-57.03
9	39988.44	44.52 PK	74	-29.48	-61.19	-63.32	8.37	-50.74
10	39988.44	33.69 AV	54	-20.31	-76.72	-70.96	8.37	-61.57

Note: Margin value = Emission Level - Limit value

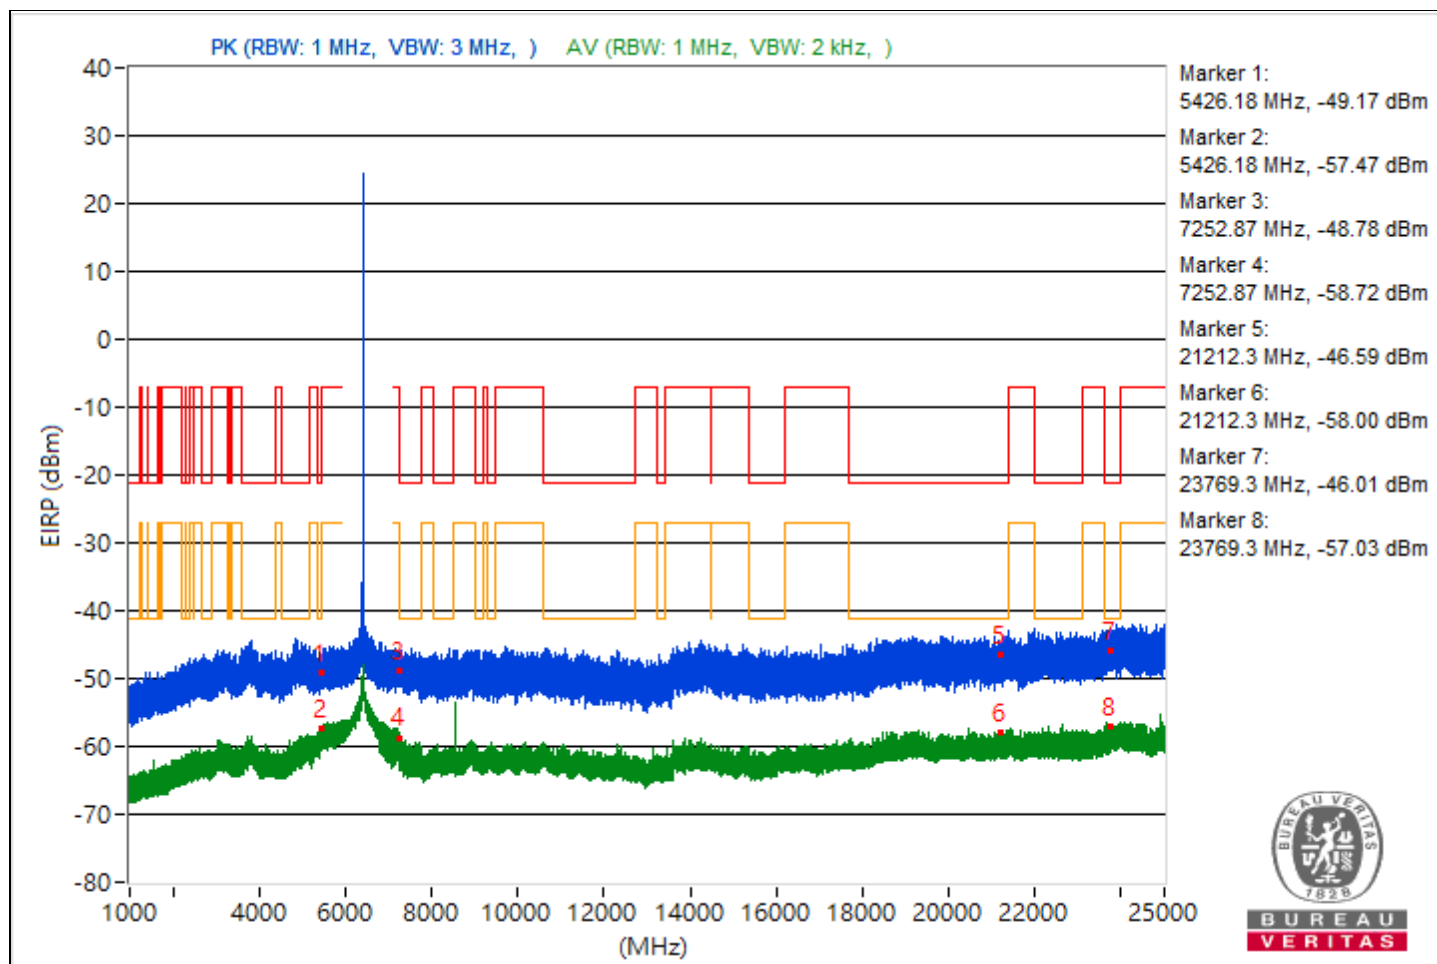


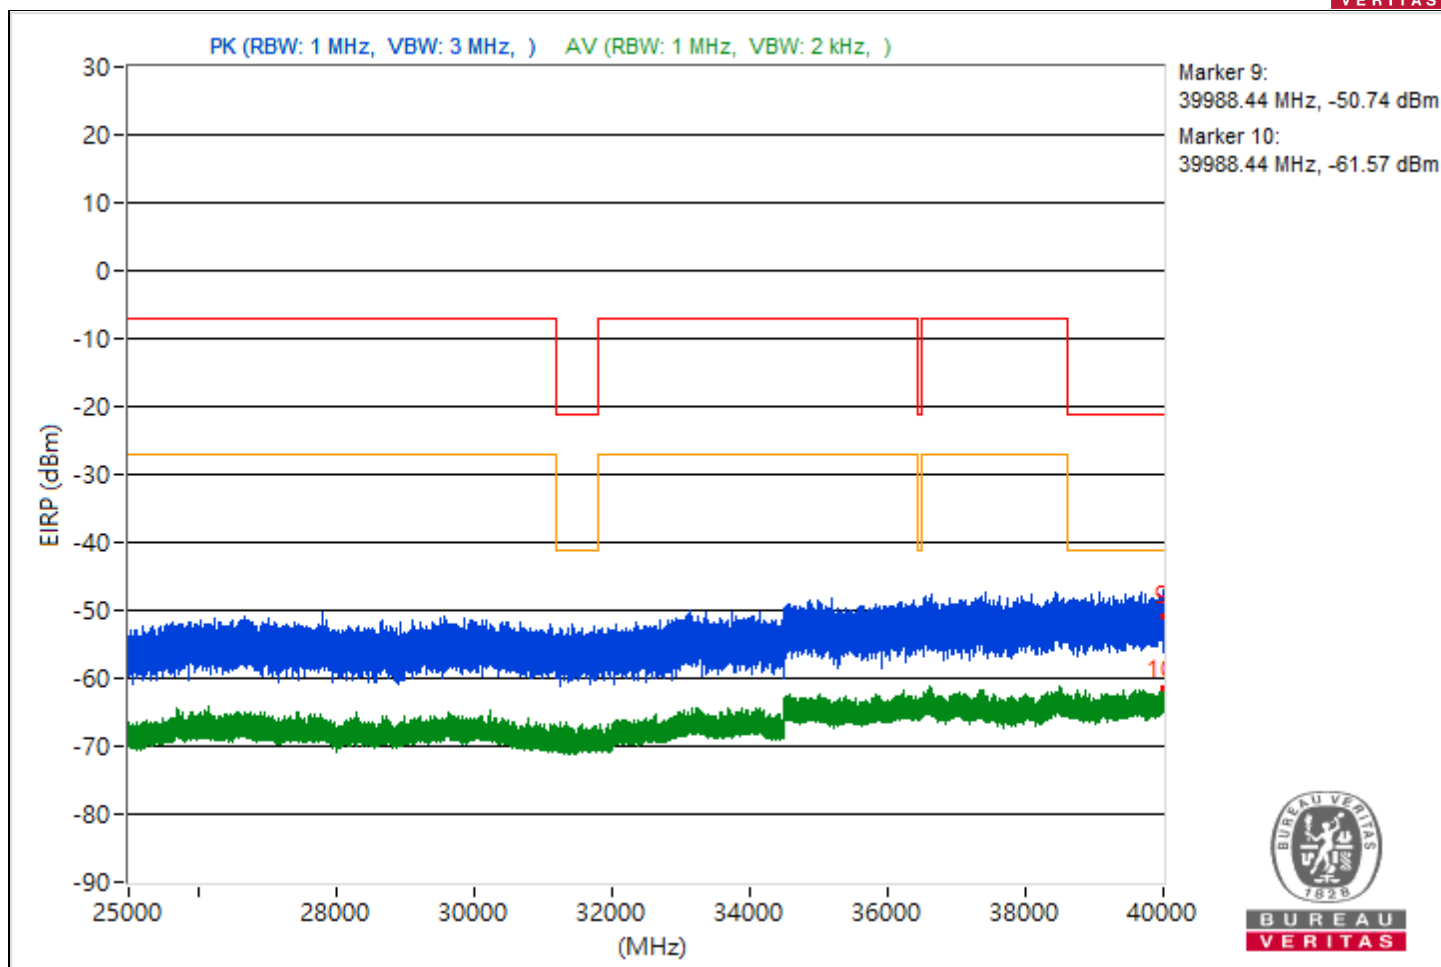


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5435.04	45.71 PK	74	-28.29	-61.68	-60.28	8.37	-49.55
2	5435.04	37.22 AV	54	-16.78	-68.64	-70.37	8.37	-58.04
3	7269.59	46.76 PK	74	-27.24	-59.78	-59.99	8.37	-48.5
4	7269.59	37.56 AV	54	-16.44	-70.42	-68.06	8.37	-57.7
5	19164.9	46.23 PK	74	-27.77	-59.22	-62.05	8.37	-49.03
6	19164.9	38.31 AV	54	-15.69	-67.46	-69.42	8.37	-56.95
7	23895.5	50.07 PK	74	-23.93	-57.16	-56.05	8.37	-45.19
8	23895.5	39.18 AV	54	-14.82	-69.6	-66.04	8.37	-56.08
9	39680.53	43.65 PK	74	-30.35	-62.11	-64.09	8.37	-51.61
10	39680.53	33.43 AV	54	-20.57	-75.7	-71.63	8.37	-61.83

Note: Margin value = Emission Level - Limit value

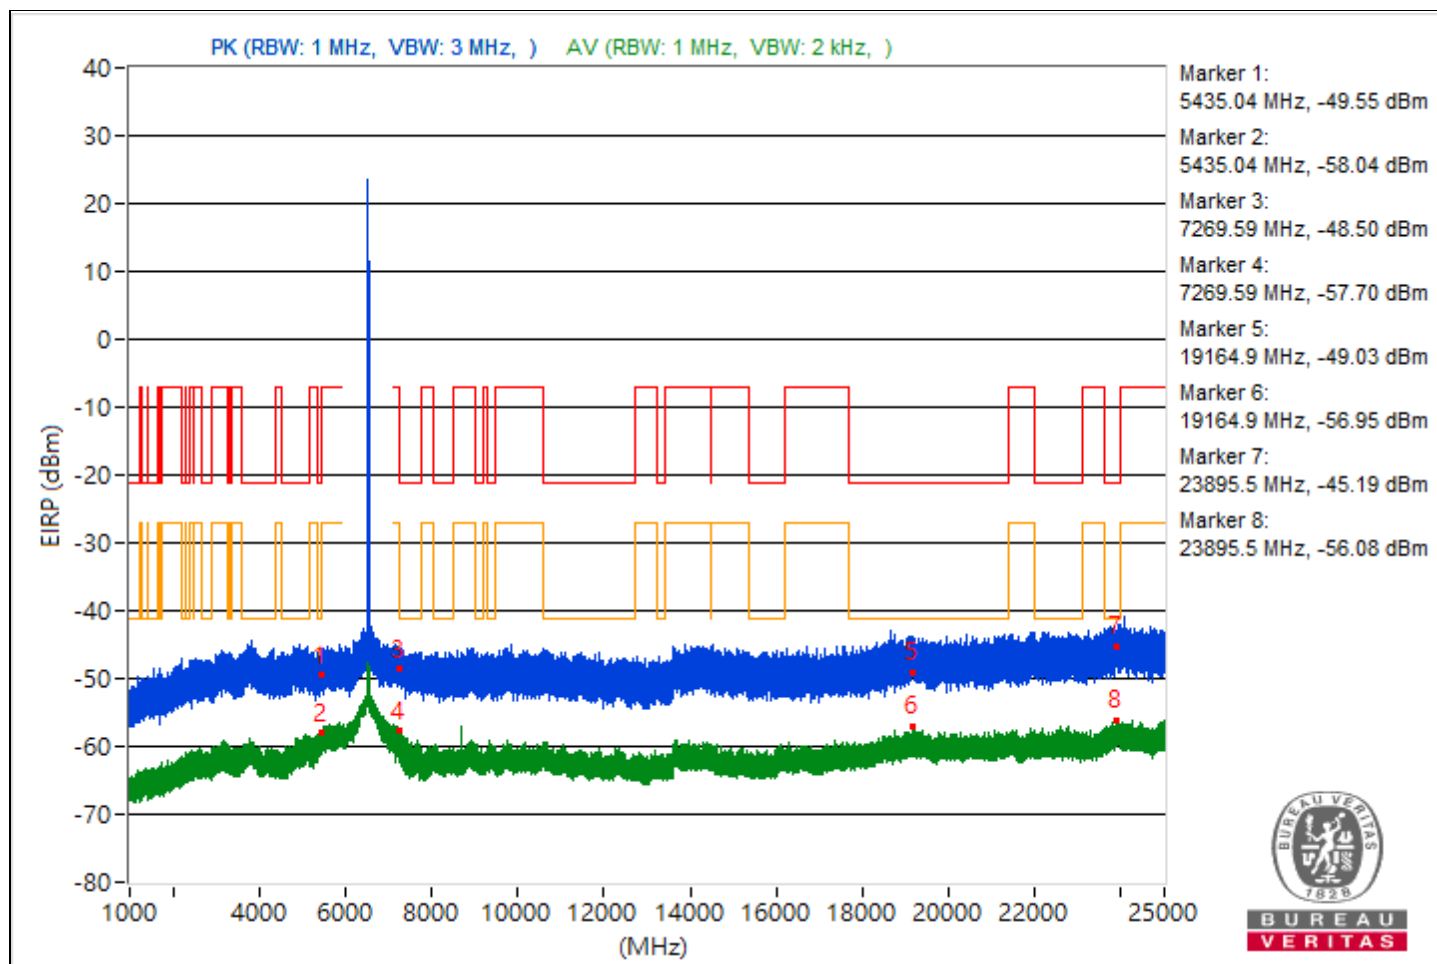


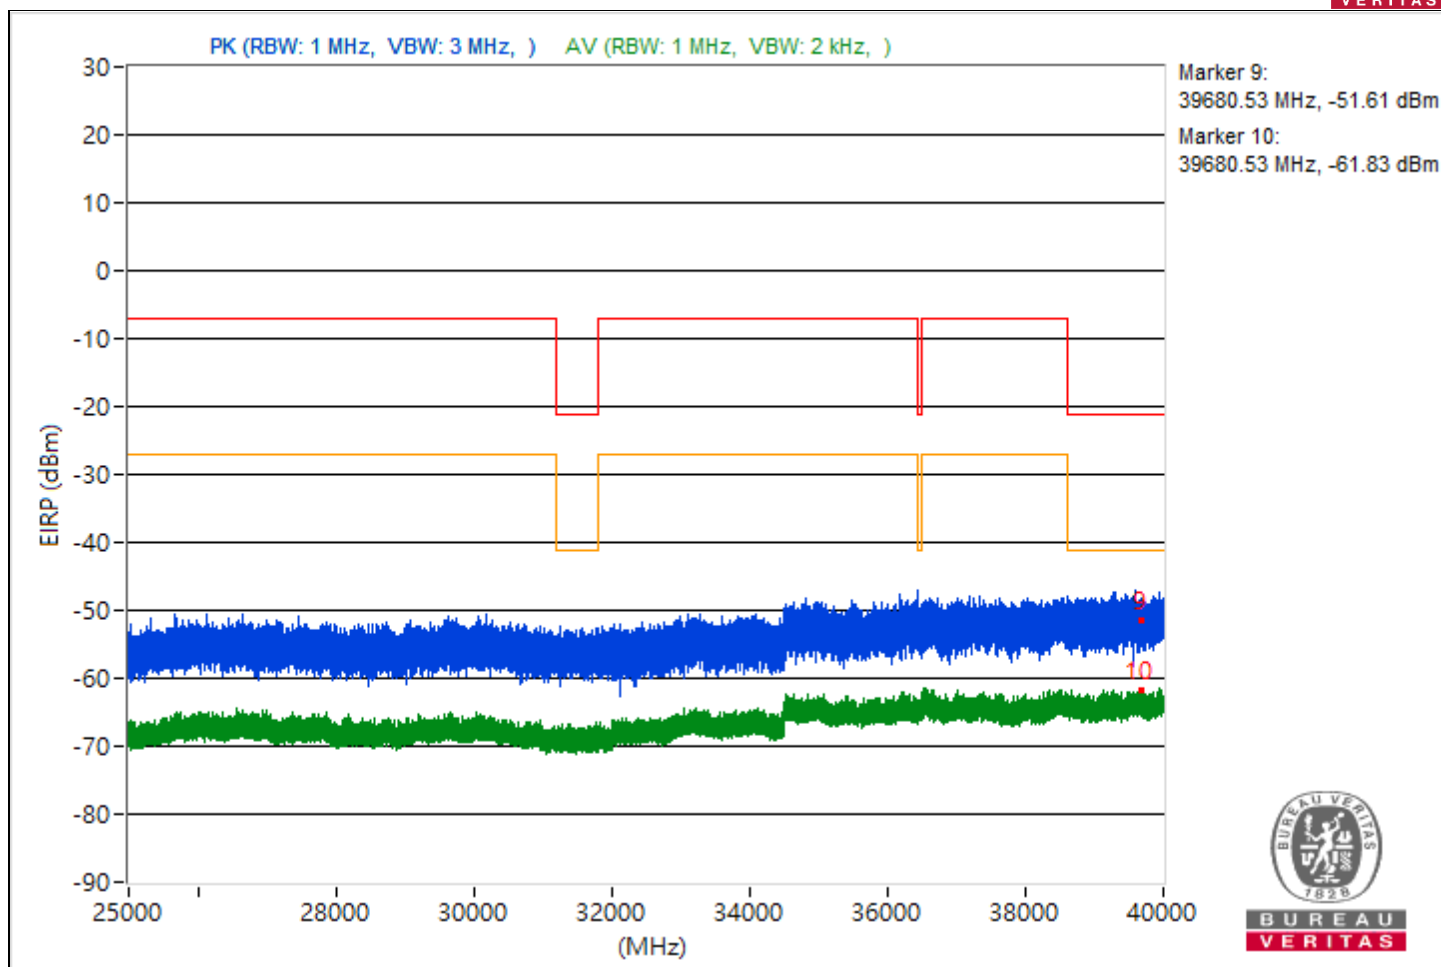


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4895.89	47.75 PK	74	-26.25	-58.1	-59.87	8.37	-47.51
2	4895.89	37.36 AV	54	-16.64	-70.85	-68.13	8.37	-57.9
3	7276.36	46.88 PK	74	-27.12	-59.08	-60.57	8.37	-48.38
4	7276.36	38.76 AV	54	-15.24	-69	-66.99	8.37	-56.5
5	21377.3	47.16 PK	74	-26.84	-59.94	-59.06	8.37	-48.1
6	21377.3	37.46 AV	54	-16.54	-72.06	-67.47	8.37	-57.8
7	23949	49.2 PK	74	-24.8	-55.6	-60.7	8.37	-46.06
8	23949	39.21 AV	54	-14.79	-70.33	-65.71	8.37	-56.05
9	39359.38	45.23 PK	74	-28.77	-60.95	-61.93	8.37	-50.03
10	39359.38	33.41 AV	54	-20.59	-76.92	-71.26	8.37	-61.85

Note: Margin value = Emission Level - Limit value

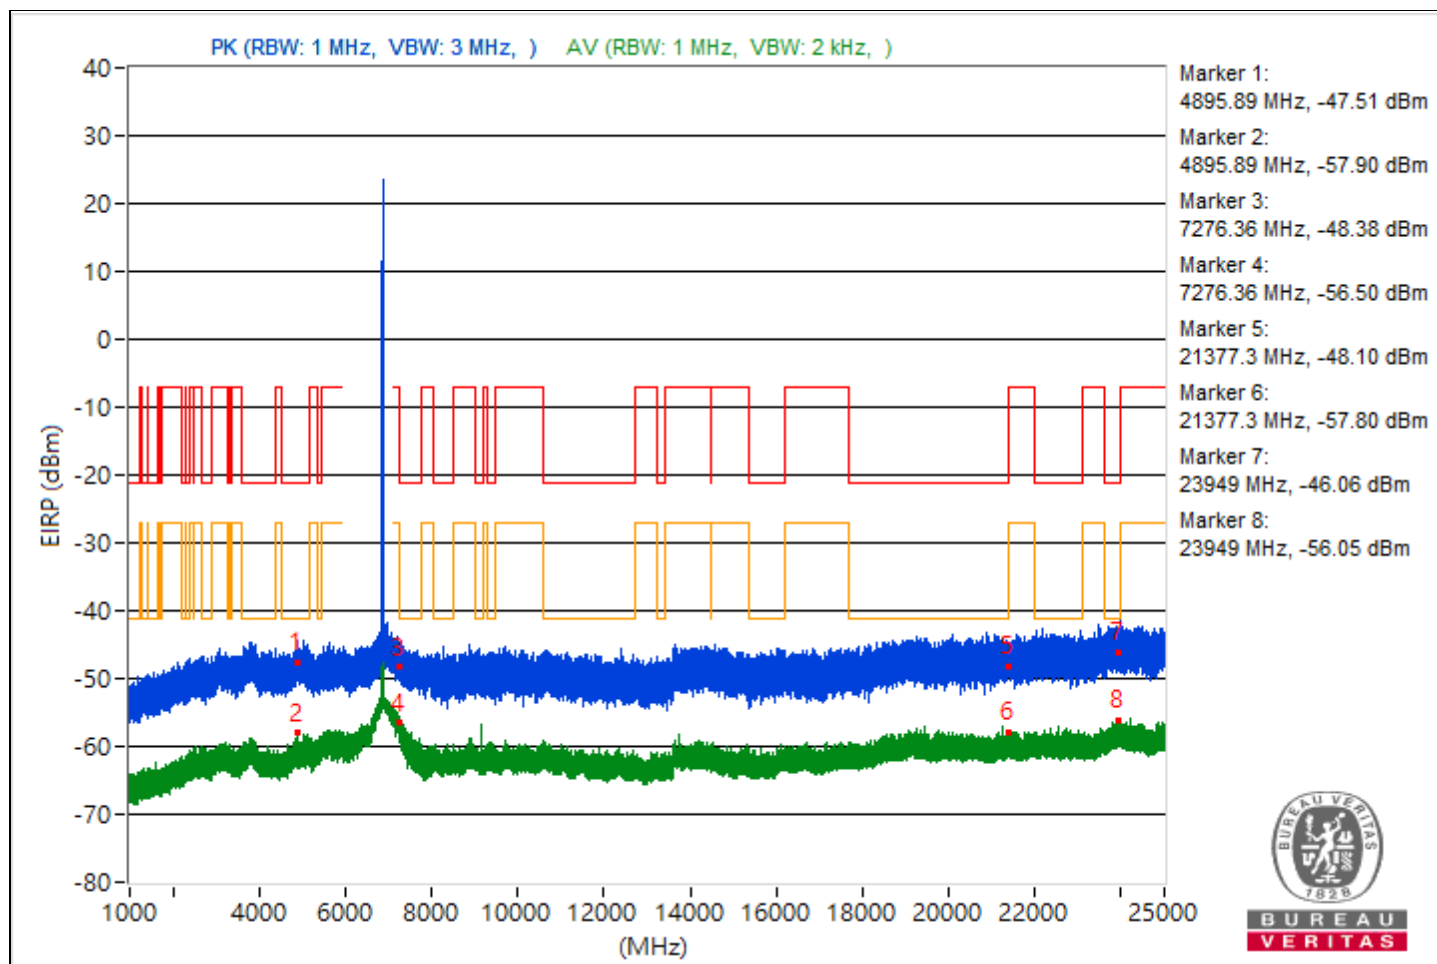

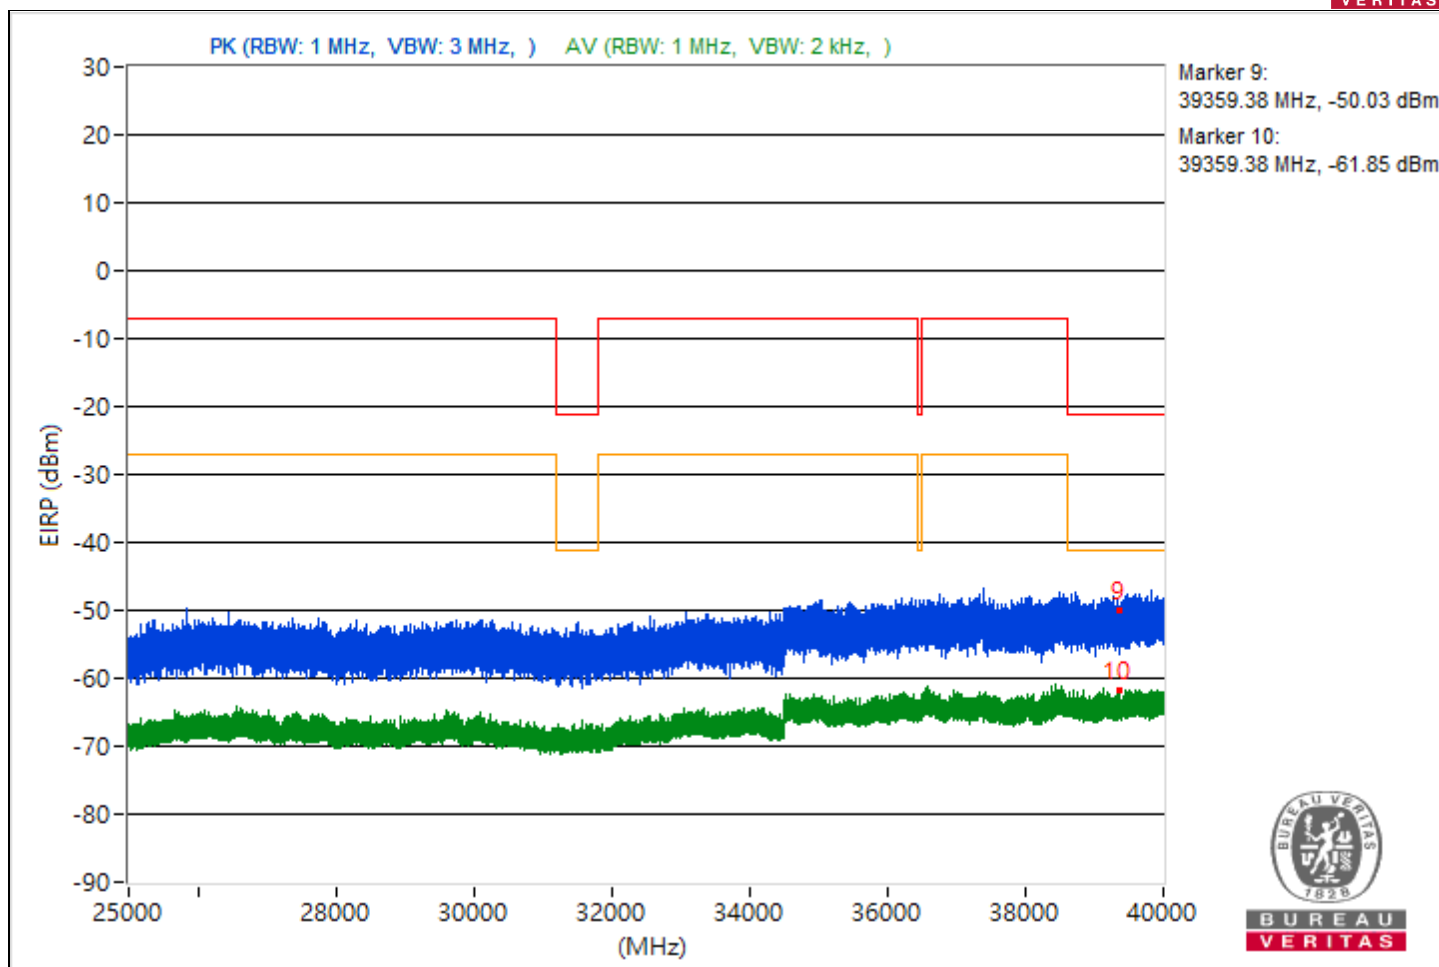



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.28	52.04 PK	74	-21.96	-54.29	-54.93	8.37	-43.22
2	5456.28	42.93 AV	54	-11.07	-64.55	-63	8.37	-52.33
3	#7940.11	54.78 PK	88.26	-33.48	-49.47	-57.61	8.37	-40.48
4	#7940.11	51.69 AV	68.26	-16.57	-52.09	-66.88	8.37	-43.57
5	21146.8	47.38 PK	74	-26.62	-59.03	-59.49	8.37	-47.88
6	21146.8	37.82 AV	54	-16.18	-67.15	-71.54	8.37	-57.44
7	23996.5	51.17 PK	74	-22.83	-53.75	-58.37	8.37	-44.09
8	23996.5	39.03 AV	54	-14.97	-66.22	-69.67	8.37	-56.23
9	39667.11	45.03 PK	74	-28.97	-60.24	-63.65	8.37	-50.23
10	39667.11	33.61 AV	54	-20.39	-75.41	-71.5	8.37	-61.65

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

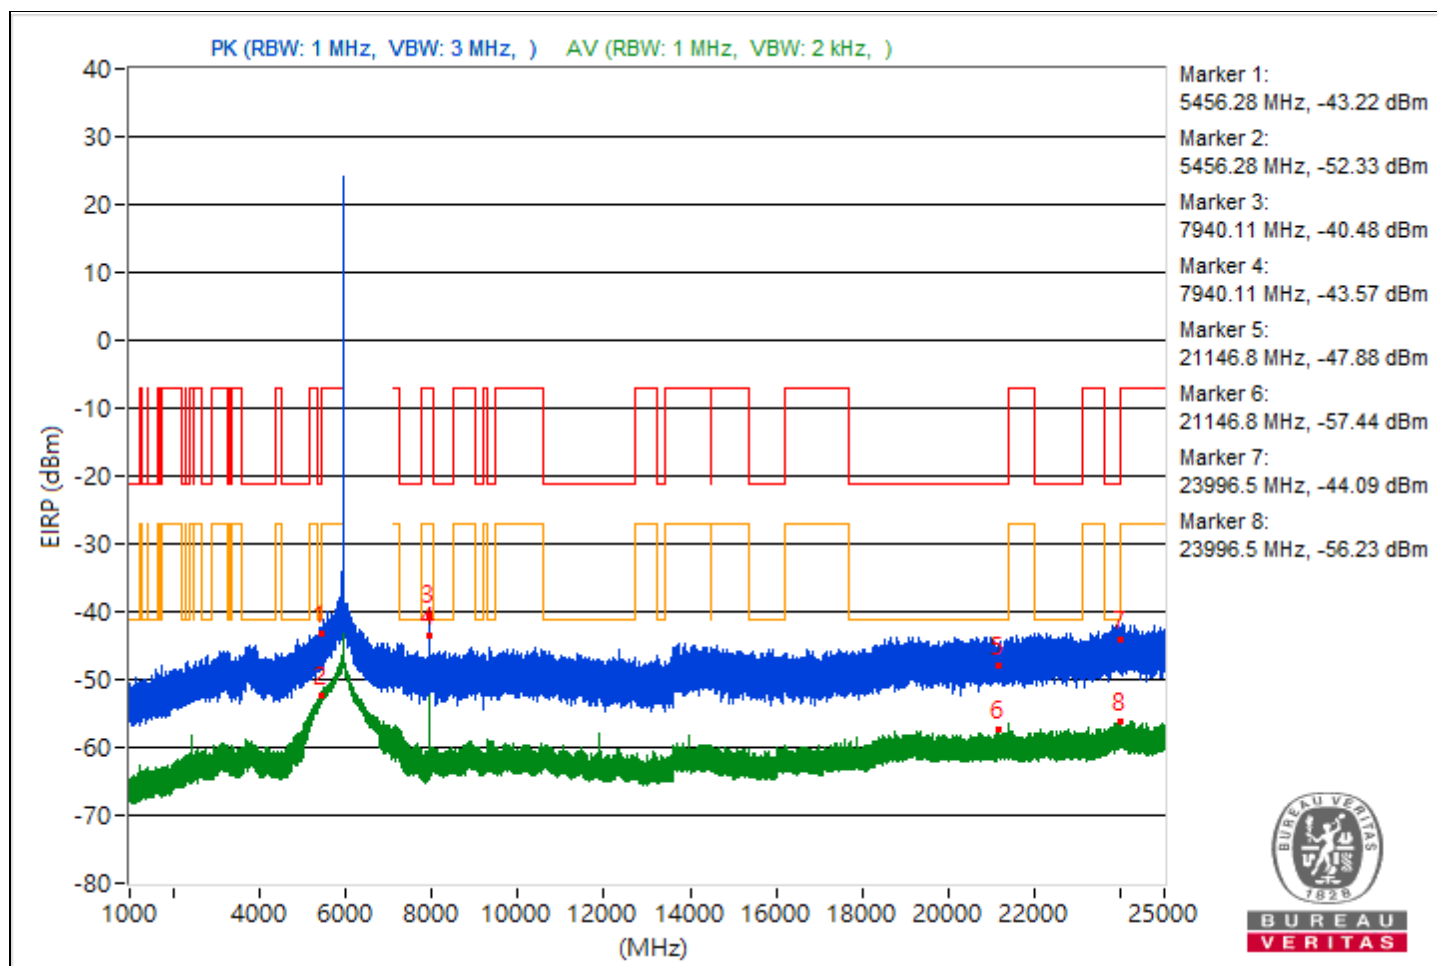


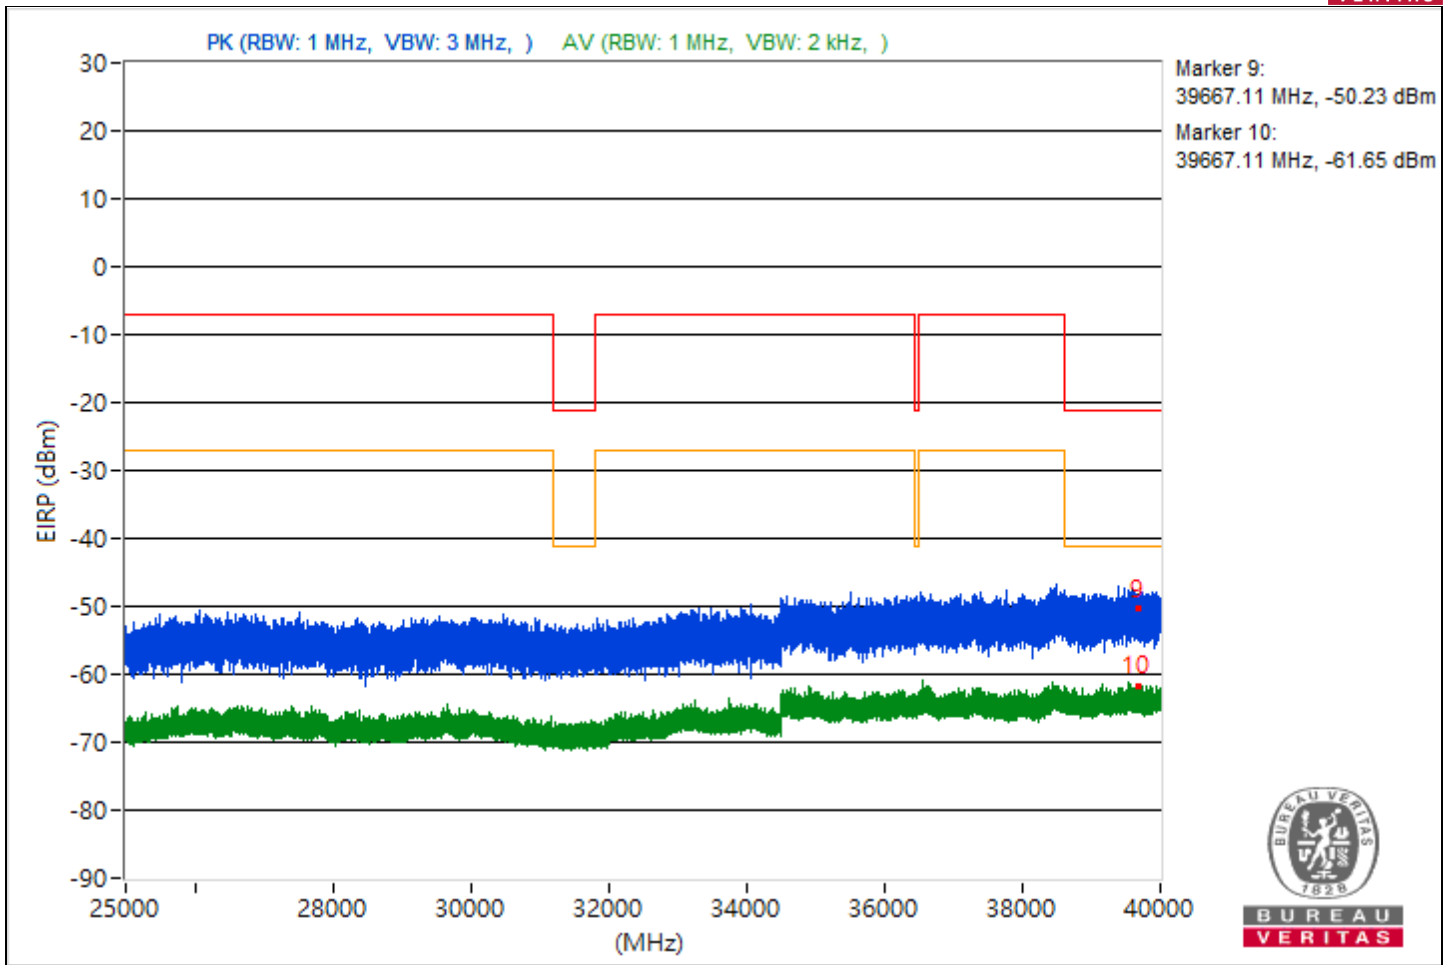


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.33	47.67 PK	74	-26.33	-59.13	-58.81	8.37	-47.59
2	5454.33	40.88 AV	54	-13.12	-65.14	-66.47	8.37	-54.38
3	7264.61	47.18 PK	74	-26.82	-58.04	-61.58	8.37	-48.08
4	7264.61	39.02 AV	54	-14.98	-66.7	-68.79	8.37	-56.24
5	21254.7	48.25 PK	74	-25.75	-59.26	-57.67	8.37	-47.01
6	21254.7	37.31 AV	54	-16.69	-71.9	-67.72	8.37	-57.95
7	23895.6	51.07 PK	74	-22.93	-56.45	-54.84	8.37	-44.19
8	23895.6	39.21 AV	54	-14.79	-66.03	-69.51	8.37	-56.05
9	39562.49	42.83 PK	74	-31.17	-63.13	-64.62	8.37	-52.43
10	39562.49	34.07 AV	54	-19.93	-71.39	-74.19	8.37	-61.19

Note: Margin value = Emission Level - Limit value

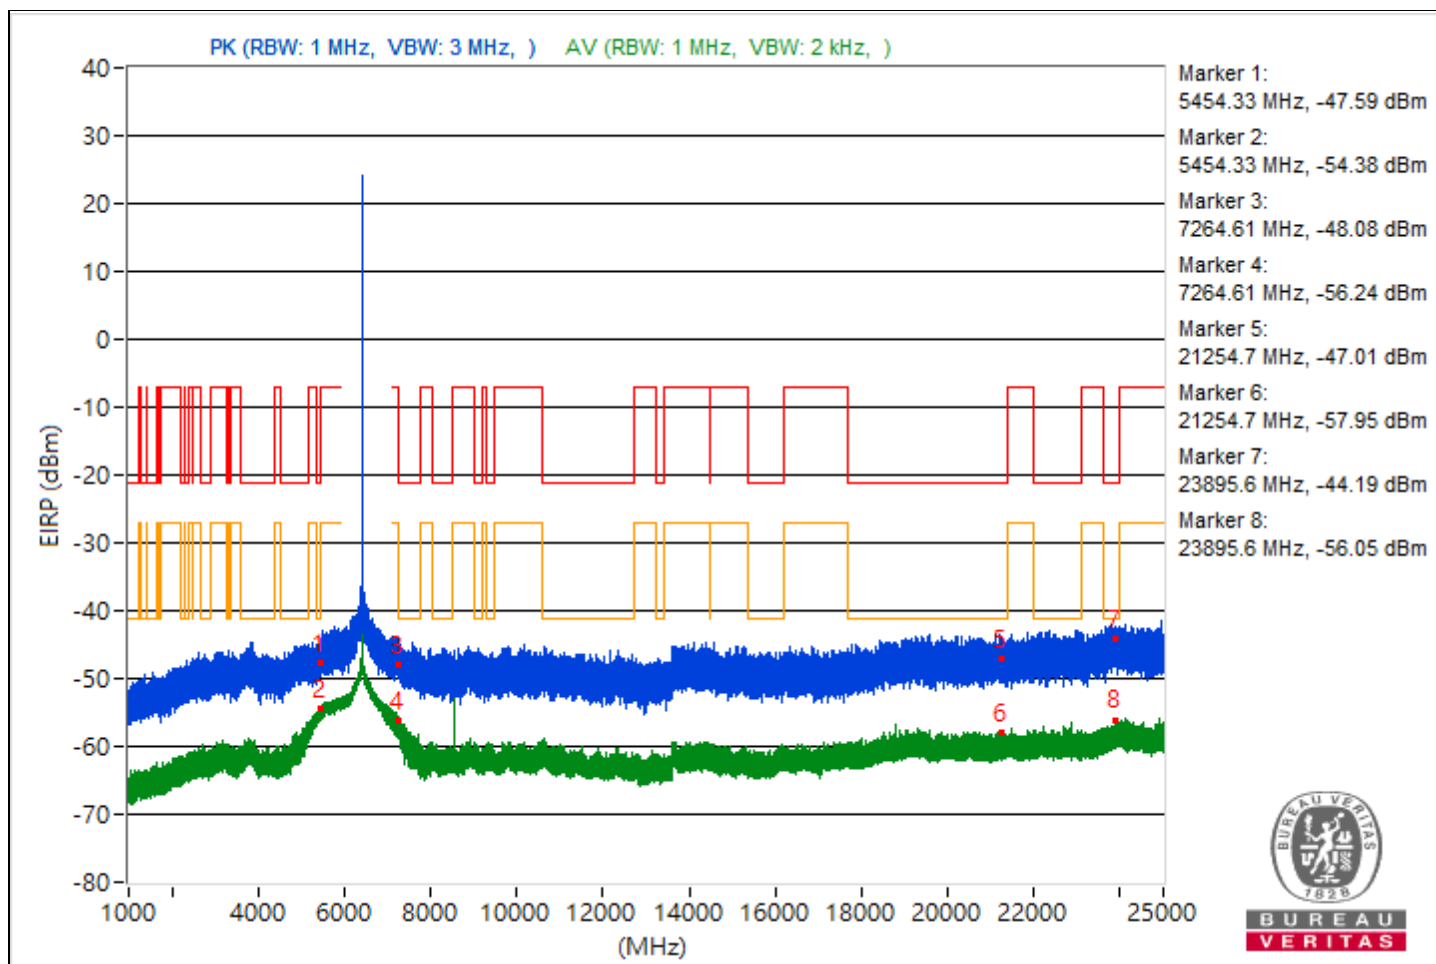


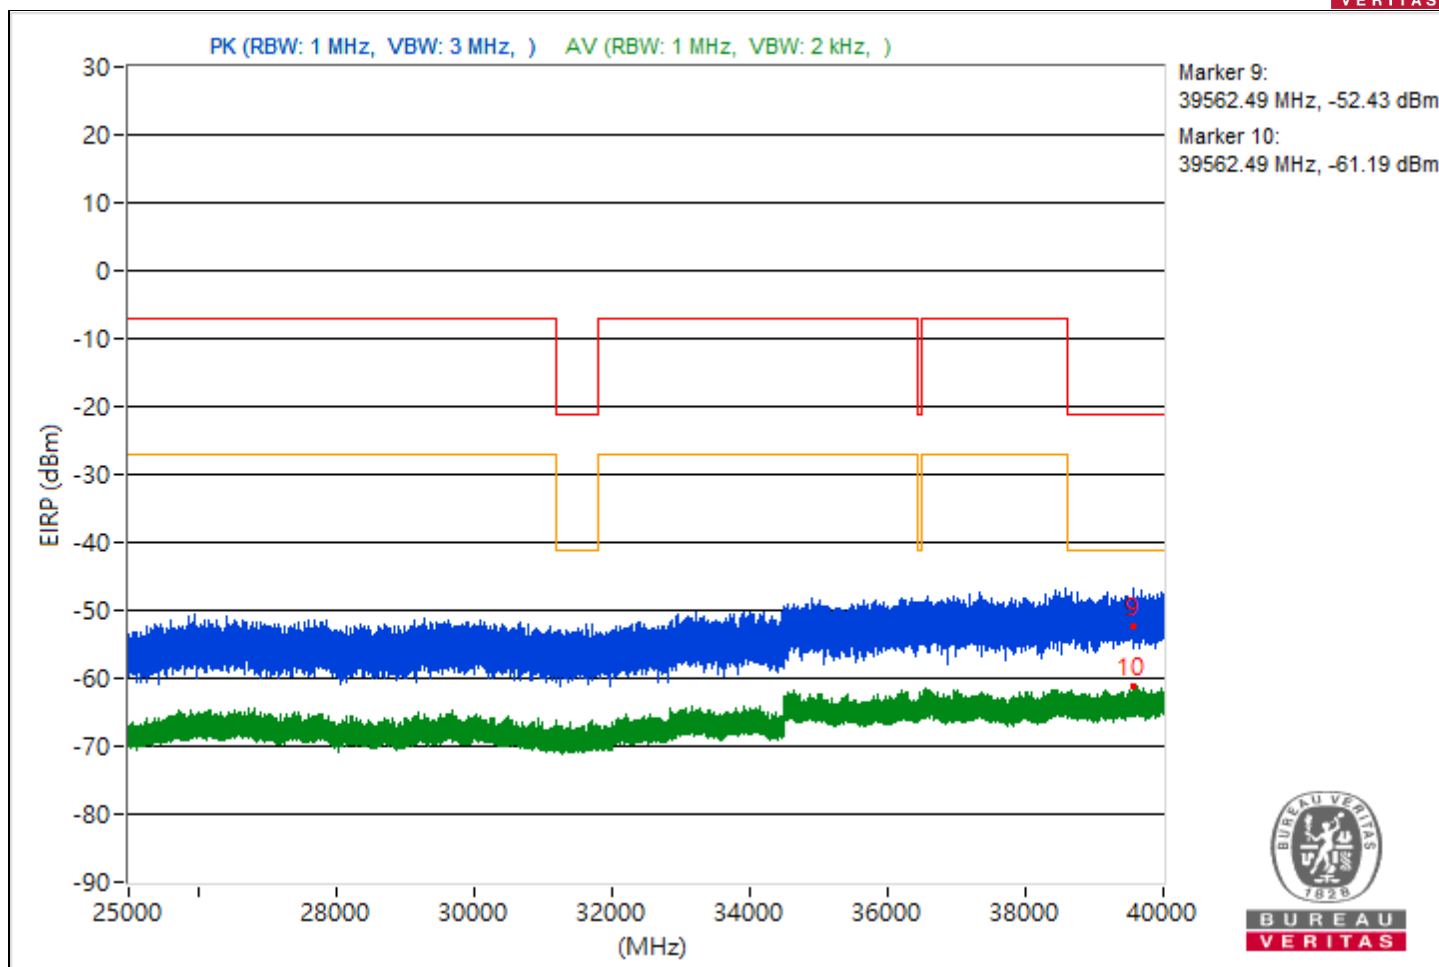


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.08	46.04 PK	74	-27.96	-61.23	-60.04	8.37	-49.22
2	5459.08	39.64 AV	54	-14.36	-66.57	-67.48	8.37	-55.62
3	7253.88	46.75 PK	74	-27.25	-63.01	-58.1	8.37	-48.51
4	7253.88	39.33 AV	54	-14.67	-66.51	-68.28	8.37	-55.93
5	19124	47.83 PK	74	-26.17	-57.63	-60.42	8.37	-47.43
6	19124	37.73 AV	54	-16.27	-67.52	-70.98	8.37	-57.53
7	23980.2	49.07 PK	74	-24.93	-57.06	-58.16	8.37	-46.19
8	23980.2	39.14 AV	54	-14.86	-66.6	-68.65	8.37	-56.12
9	39517.16	43.65 PK	74	-30.35	-63.09	-62.9	8.37	-51.61
10	39517.16	34.21 AV	54	-19.79	-71.45	-73.71	8.37	-61.05

Note: Margin value = Emission Level - Limit value

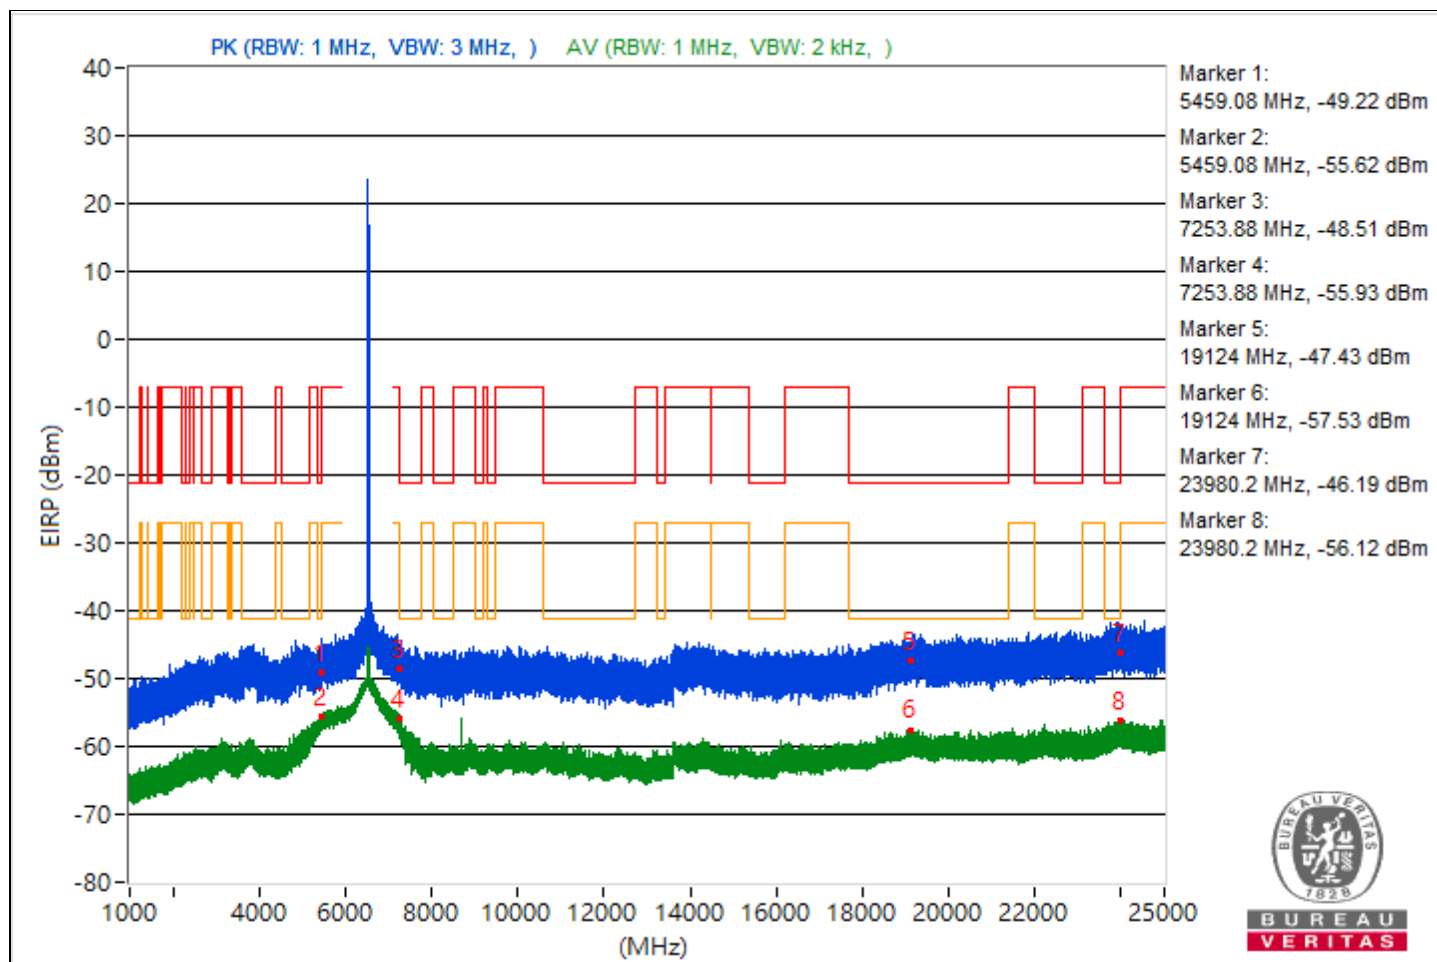


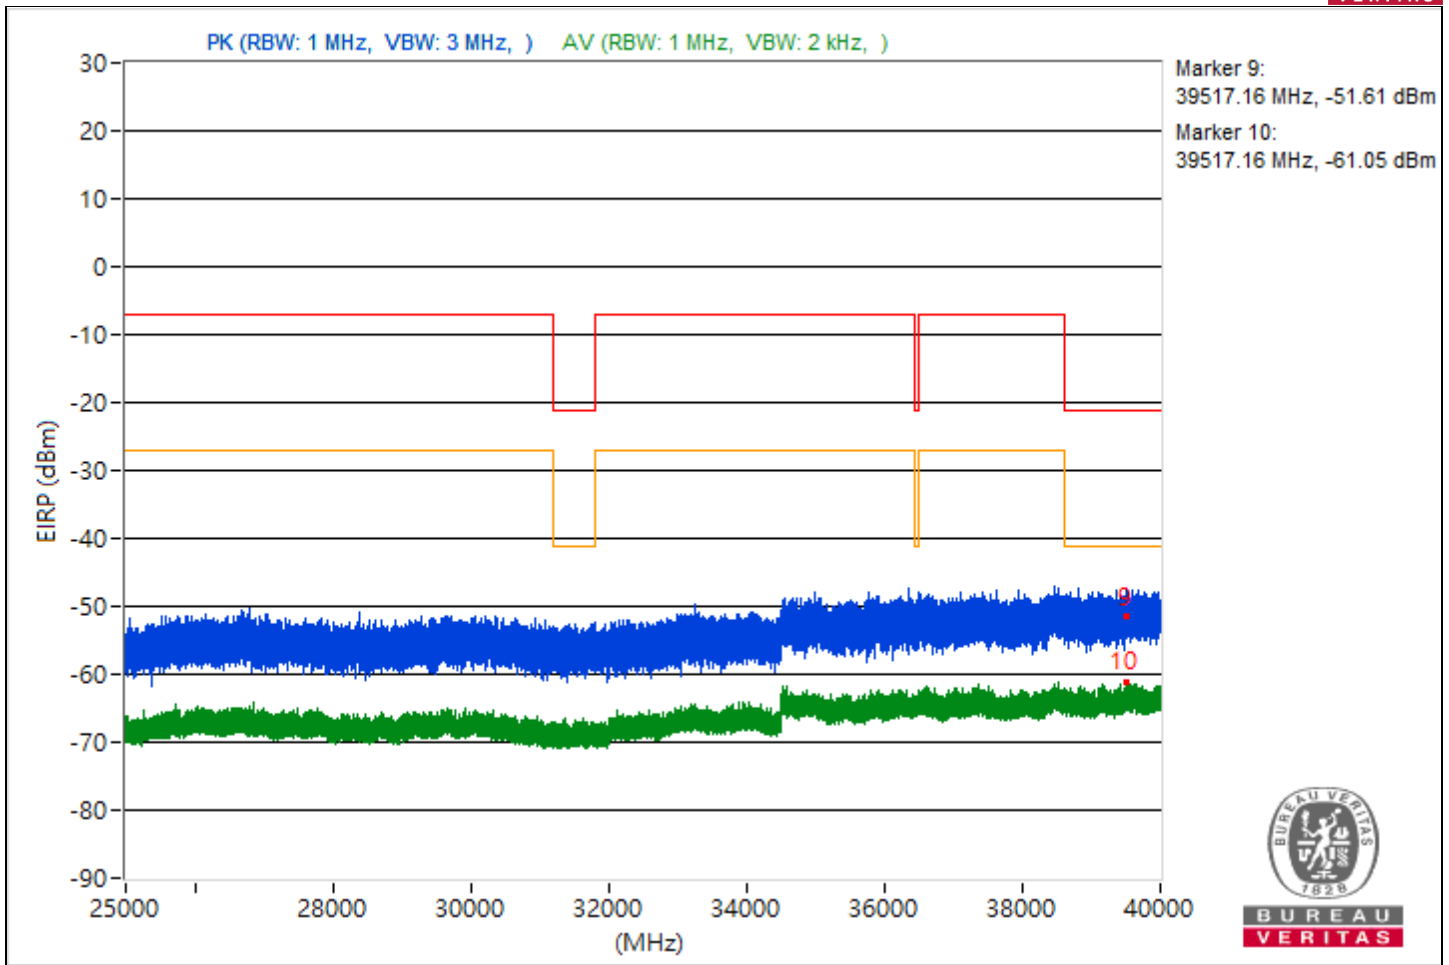


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5444.46	46.18 PK	74	-27.82	-59.51	-61.7	8.37	-49.08
2	5444.46	38.31 AV	54	-15.69	-67.29	-69.7	8.37	-56.95
3	7257.46	50.2 PK	74	-23.8	-56.22	-56.68	8.37	-45.06
4	7257.46	41.95 AV	54	-12.05	-65.68	-63.88	8.37	-53.31
5	21315.5	47.52 PK	74	-26.48	-59.94	-58.43	8.37	-47.74
6	21315.5	37.83 AV	54	-16.17	-70.43	-67.63	8.37	-57.43
7	23828.3	50.25 PK	74	-23.75	-56.3	-56.49	8.37	-45.01
8	23828.3	38.85 AV	54	-15.15	-70.51	-66.13	8.37	-56.41
9	39972.36	43.8 PK	74	-30.2	-64.07	-61.89	8.37	-51.46
10	39972.36	33.79 AV	54	-20.21	-74.57	-71.62	8.37	-61.47

Note: Margin value = Emission Level - Limit value

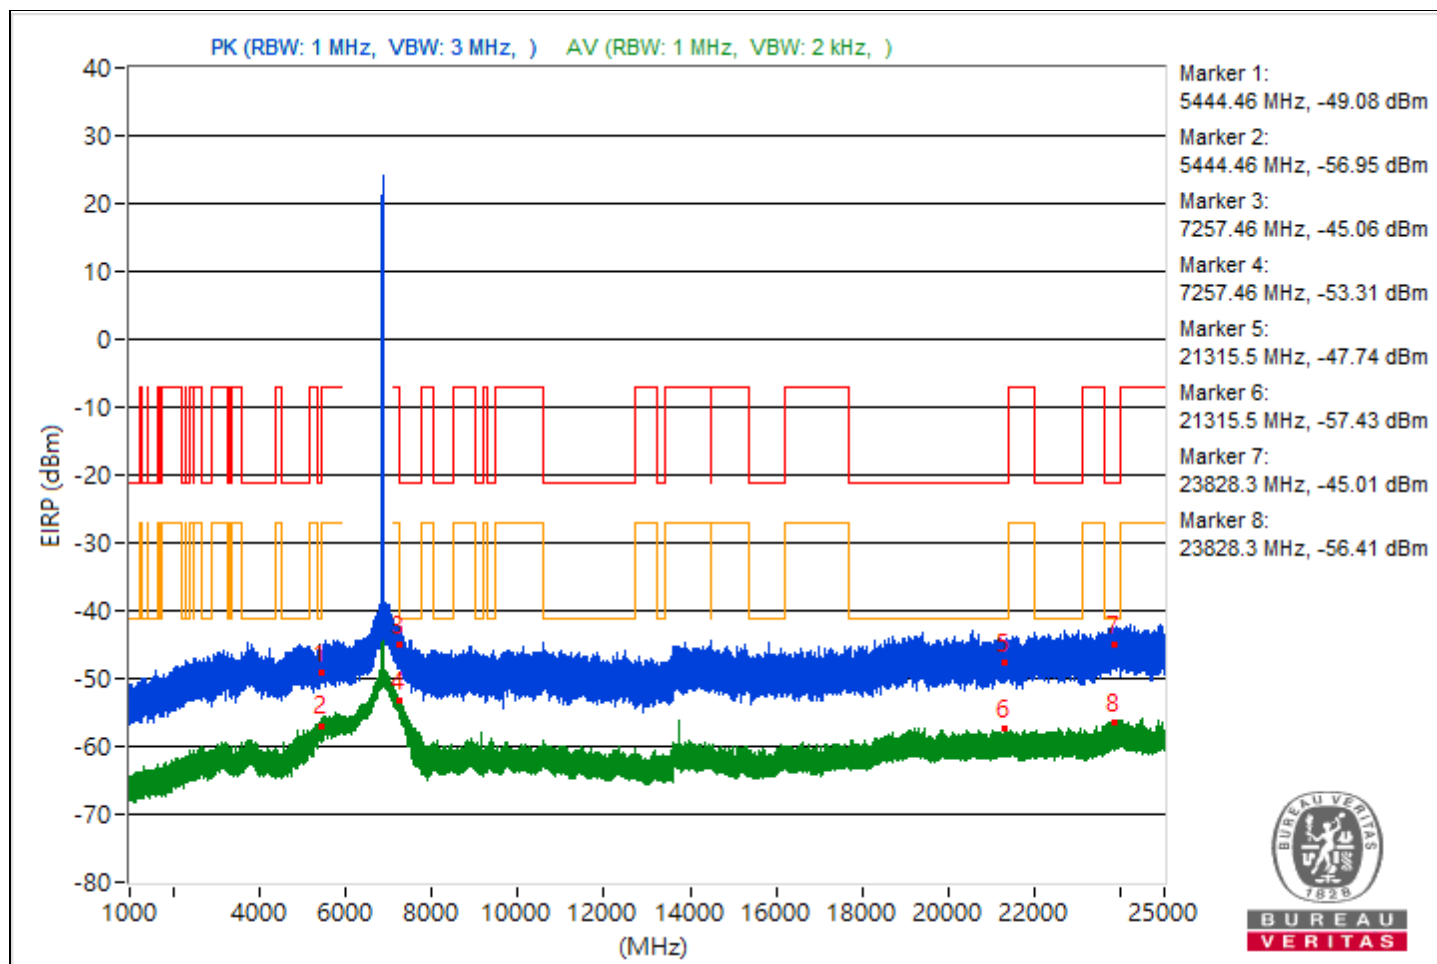

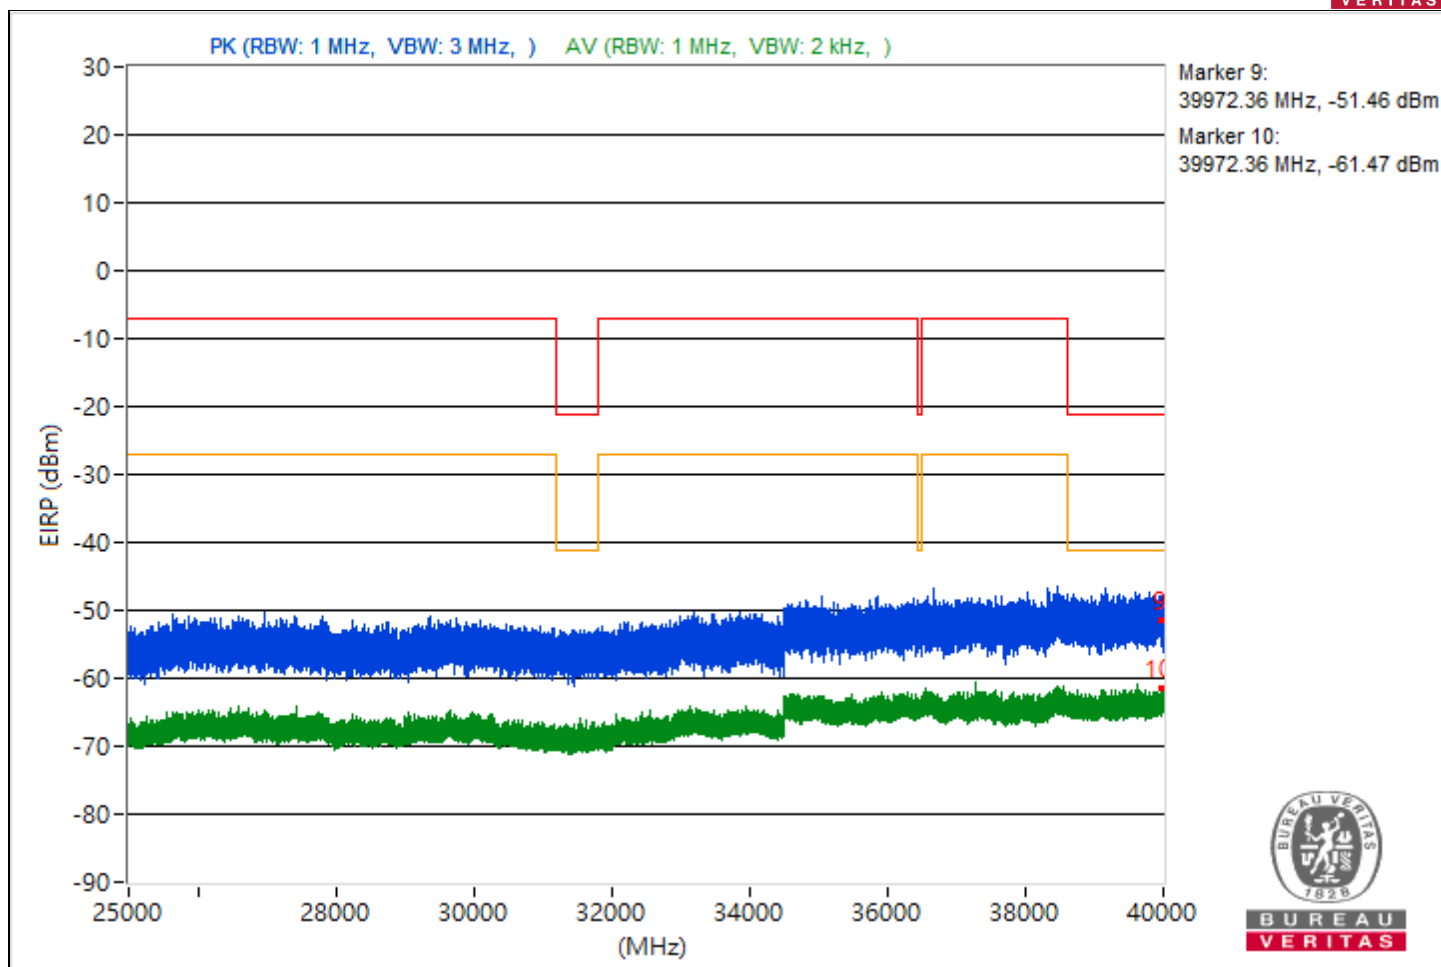



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.3	50.61 PK	74	-23.39	-55.45	-56.7	8.37	-44.65
2	5458.3	42.97 AV	54	-11.03	-64.31	-63.11	8.37	-52.29
3	#7940.03	54.67 PK	88.26	-33.59	-49.32	-60.01	8.37	-40.59
4	#7940.03	52.31 AV	68.26	-15.95	-51.4	-68.49	8.37	-42.95
5	19326	47.73 PK	74	-26.27	-58.89	-58.93	8.37	-47.53
6	19326	38.18 AV	54	-15.82	-70.64	-67.01	8.37	-57.08
7	23993.9	49.49 PK	74	-24.51	-56.49	-57.93	8.37	-45.77
8	23993.9	39 AV	54	-15	-66.25	-69.7	8.37	-56.26
9	39991.73	43.86 PK	74	-30.14	-63.72	-62.01	8.37	-51.4
10	39991.73	34.04 AV	54	-19.96	-71.43	-74.2	8.37	-61.22

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

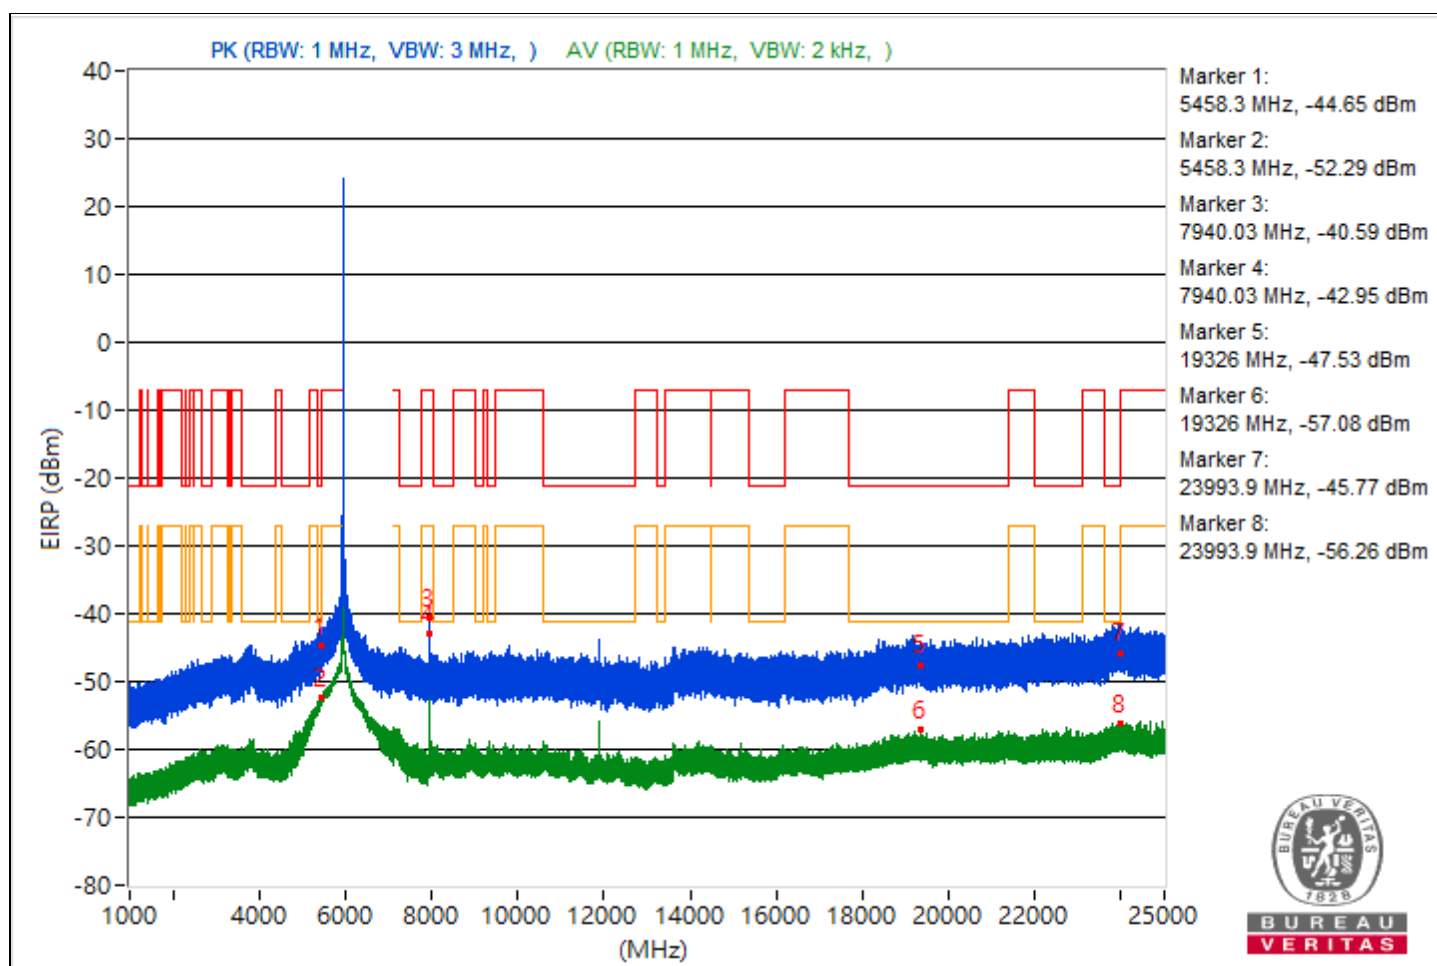


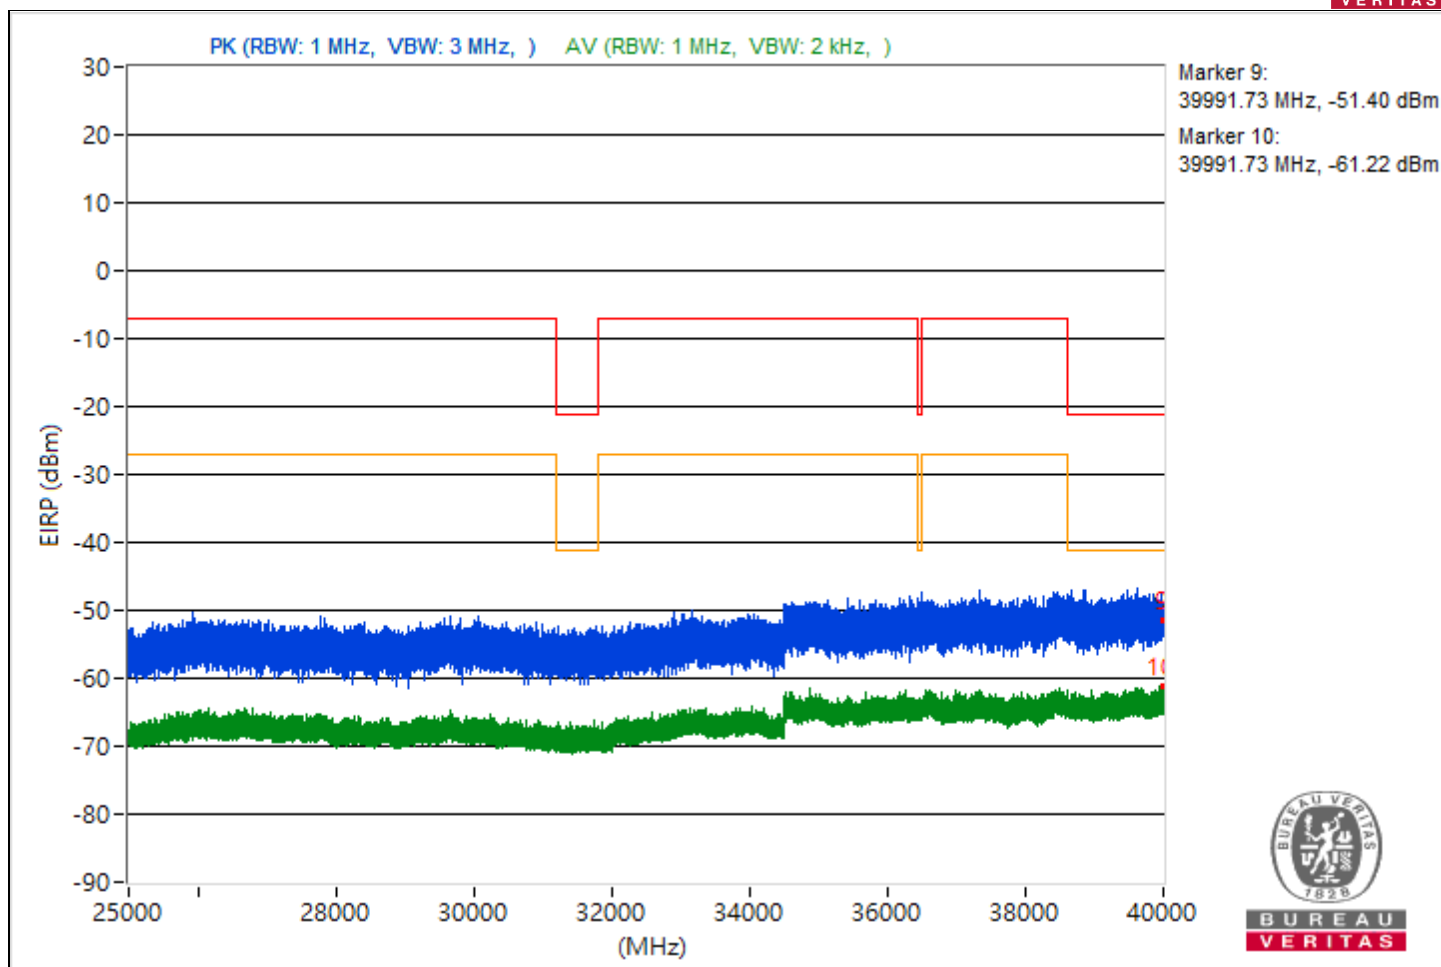


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.82	49.08 PK	74	-24.92	-59.05	-56.45	8.37	-46.18
2	5449.82	40.93 AV	54	-13.07	-65.9	-65.53	8.37	-54.33
3	7264.53	45.74 PK	74	-28.26	-61.71	-60.23	8.37	-49.52
4	7264.53	39.41 AV	54	-14.59	-66.55	-68.05	8.37	-55.85
5	21217.2	48.38 PK	74	-25.62	-59.74	-57.16	8.37	-46.88
6	21217.2	38.03 AV	54	-15.97	-66.94	-71.37	8.37	-57.23
7	23797.5	50.03 PK	74	-23.97	-58.9	-55.13	8.37	-45.23
8	23797.5	38.4 AV	54	-15.6	-71.27	-66.46	8.37	-56.86
9	39929.78	43.23 PK	74	-30.77	-62.94	-63.95	8.37	-52.03
10	39929.78	33.48 AV	54	-20.52	-75.93	-71.49	8.37	-61.78

Note: Margin value = Emission Level - Limit value

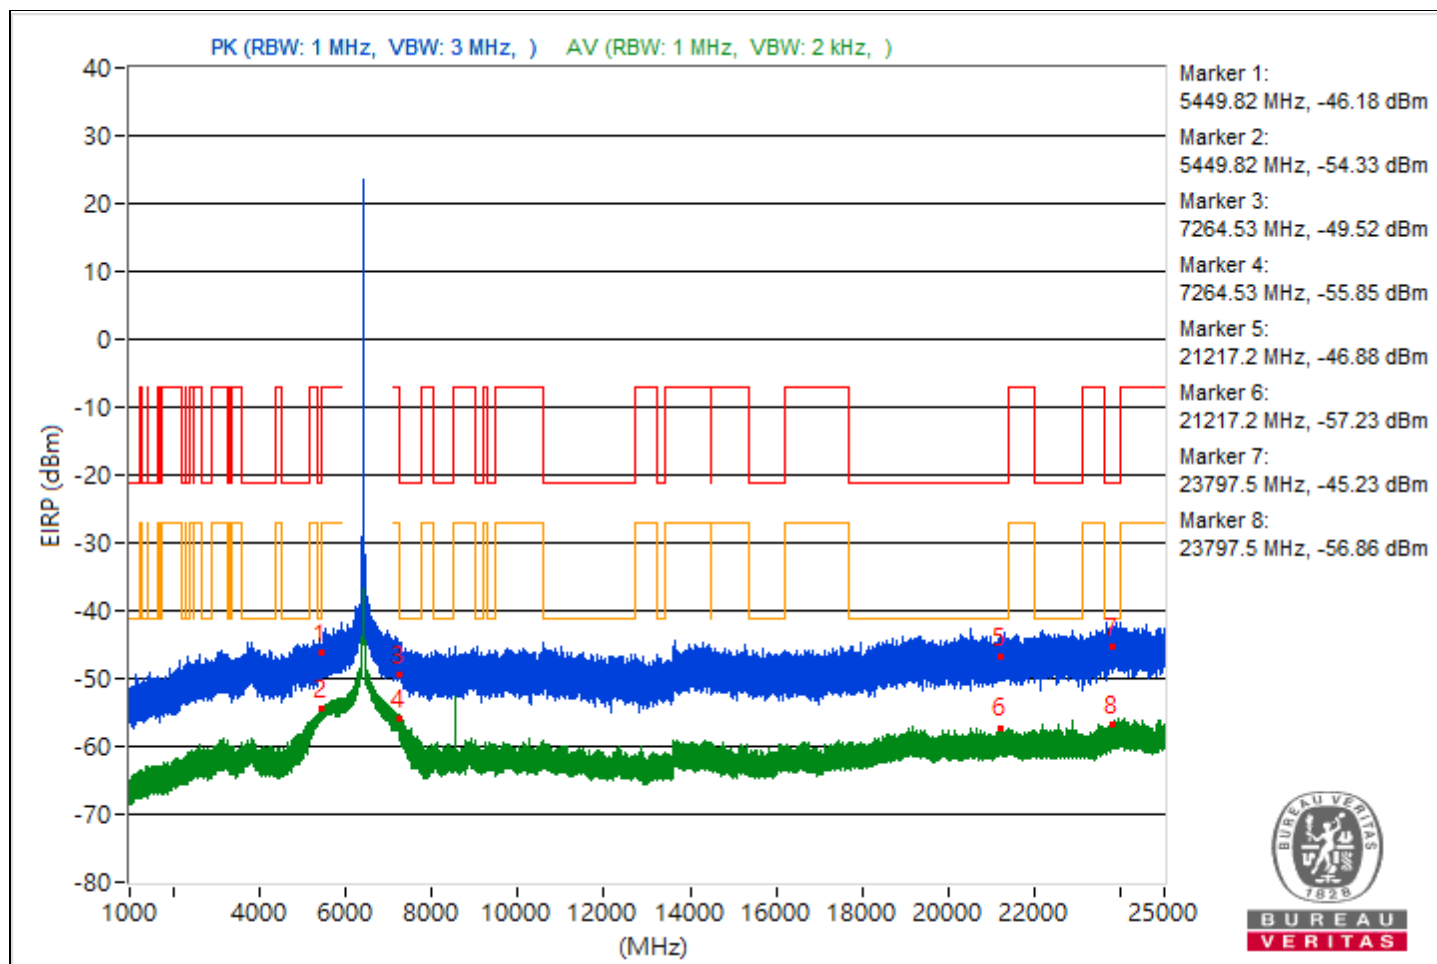


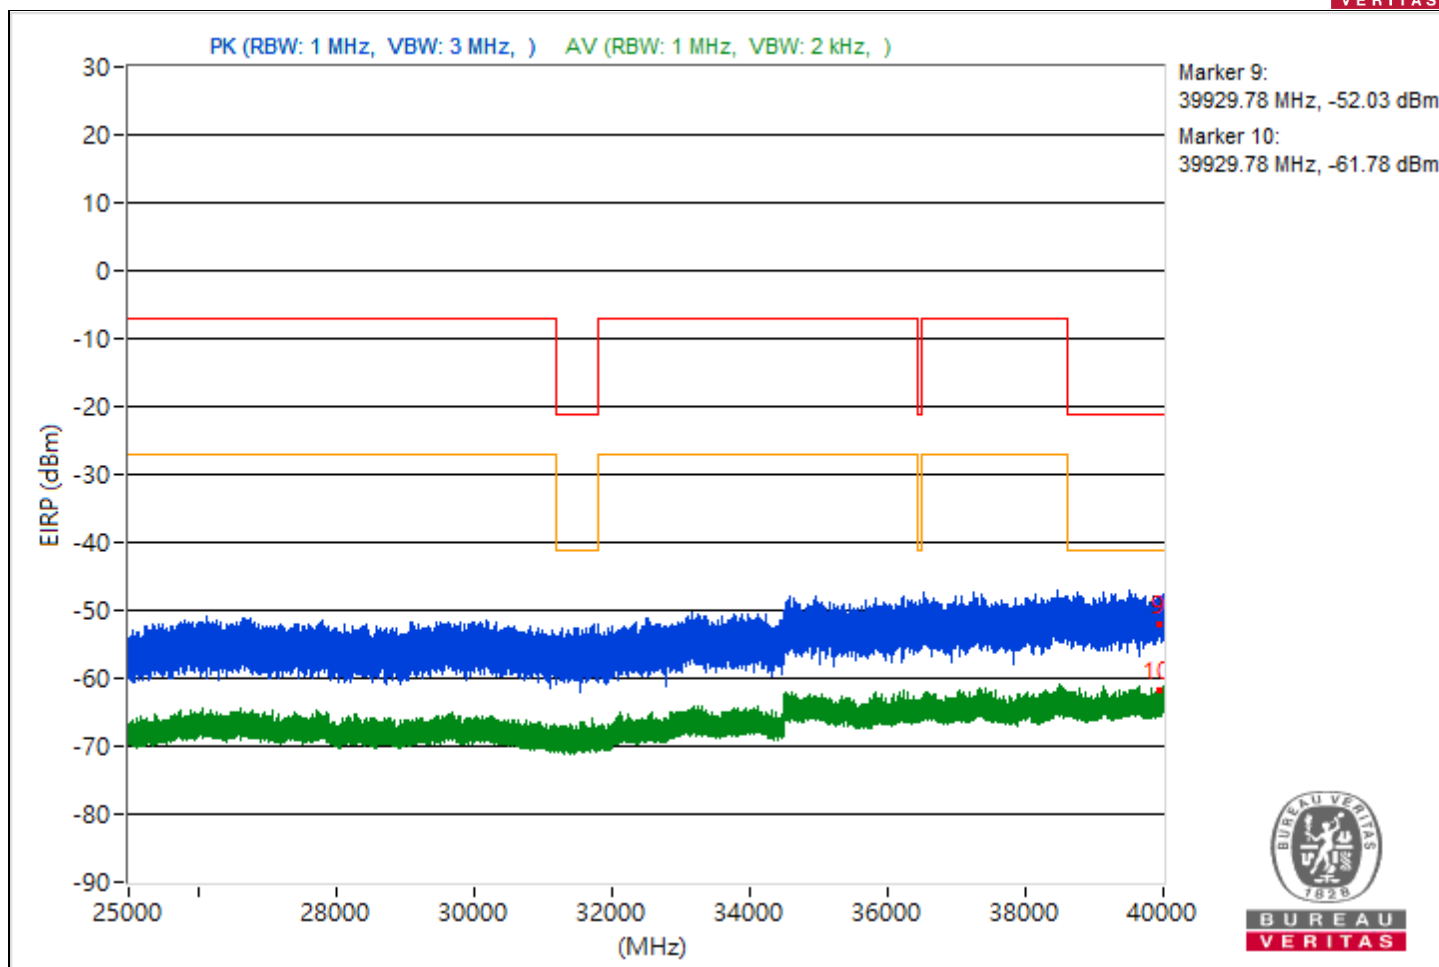


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5439.17	48.19 PK	74	-25.81	-58.87	-58.06	8.37	-47.07
2	5439.17	39.19 AV	54	-14.81	-68.34	-66.71	8.37	-56.07
3	7250.69	48.19 PK	74	-25.81	-59.44	-57.65	8.37	-47.07
4	7250.69	39.23 AV	54	-14.77	-66.54	-68.5	8.37	-56.03
5	18744.1	45.92 PK	74	-28.08	-60.58	-60.88	8.37	-49.34
6	18744.1	37.58 AV	54	-16.42	-67.28	-72.1	8.37	-57.68
7	23885.8	49.34 PK	74	-24.66	-57.63	-57	8.37	-45.92
8	23885.8	39.18 AV	54	-14.82	-70.88	-65.57	8.37	-56.08
9	39577.42	43.23 PK	74	-30.77	-64.45	-62.57	8.37	-52.03
10	39577.42	33.71 AV	54	-20.29	-75.95	-71.17	8.37	-61.55

Note: Margin value = Emission Level - Limit value

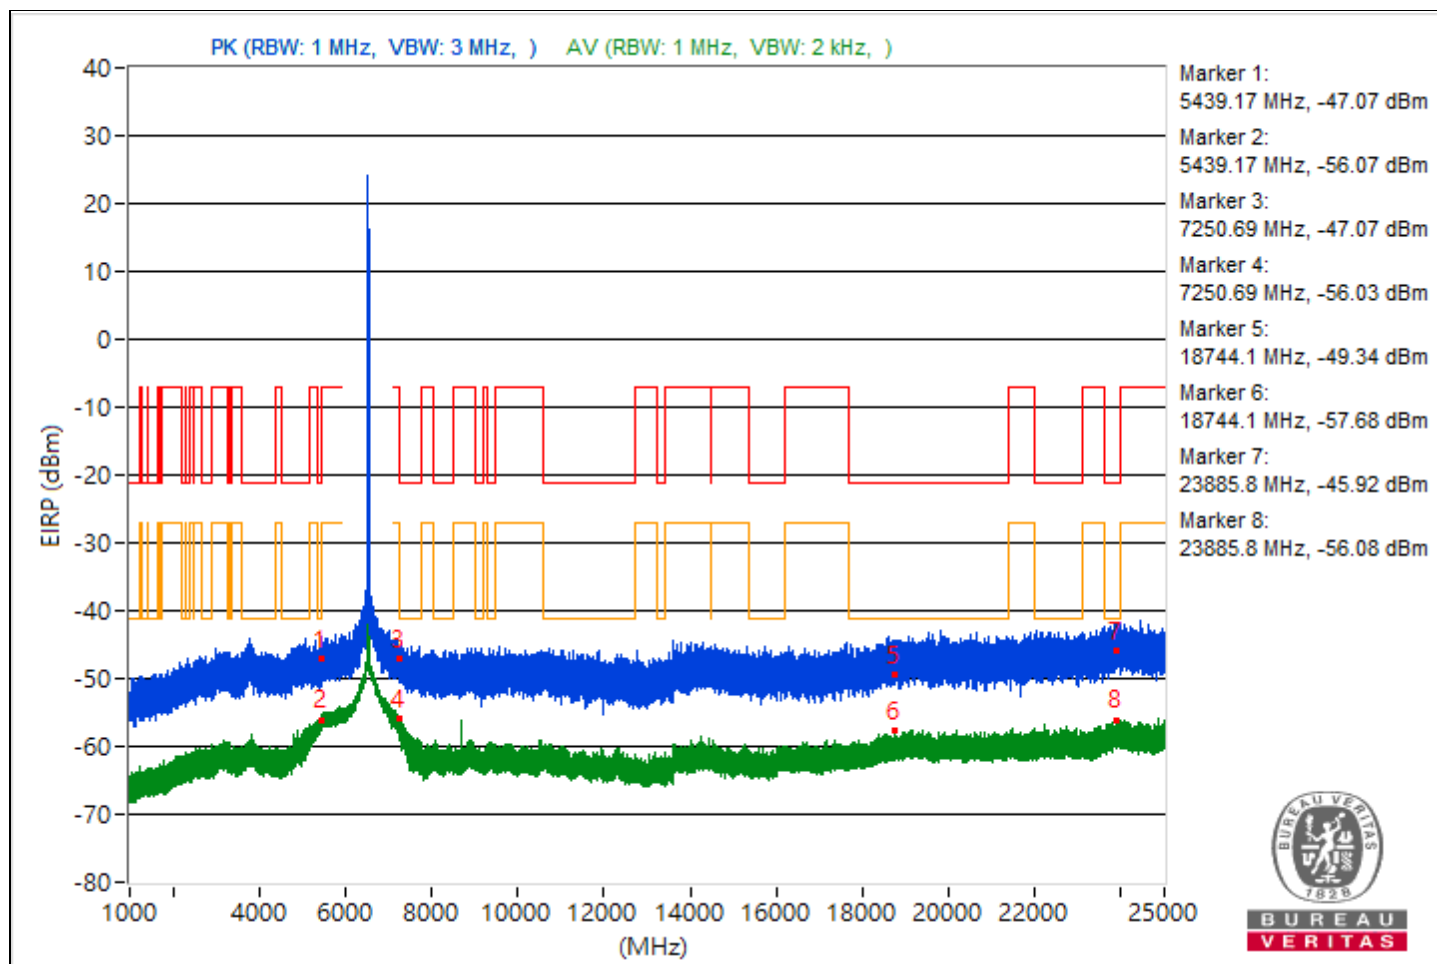


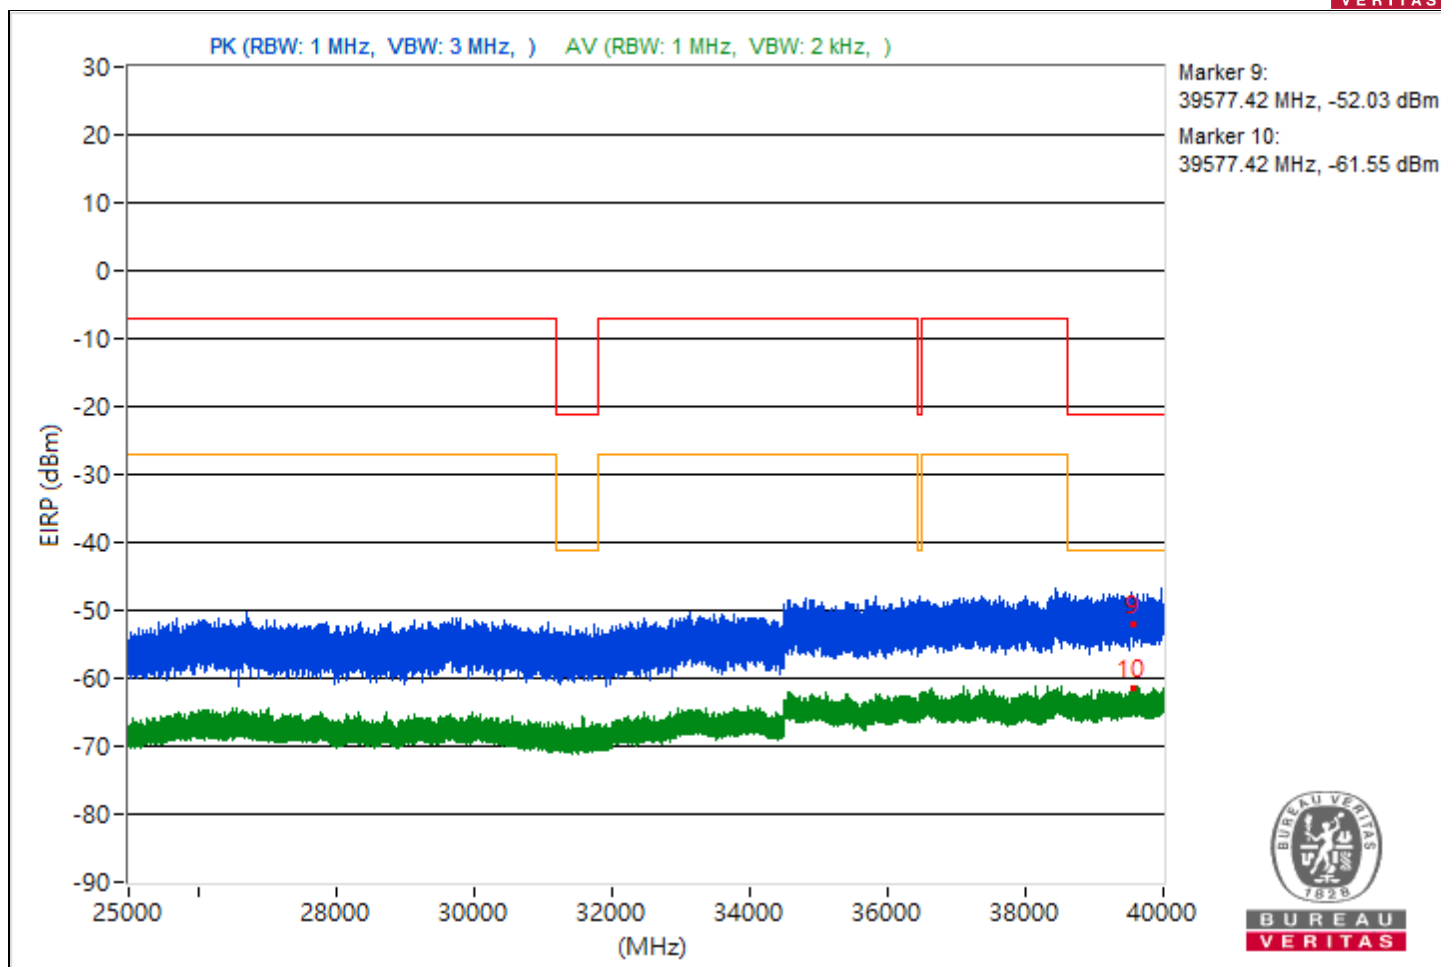


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.71	48.41 PK	74	-25.59	-57.14	-59.68	8.37	-46.85
2	5446.71	39.19 AV	54	-14.81	-68.08	-66.9	8.37	-56.07
3	7252.4	48.14 PK	74	-25.86	-57.9	-59.21	8.37	-47.12
4	7252.4	41.31 AV	54	-12.69	-64.22	-66.82	8.37	-53.95
5	19822.9	47.46 PK	74	-26.54	-59.89	-58.58	8.37	-47.8
6	19822.9	37.45 AV	54	-16.55	-67.69	-71.51	8.37	-57.81
7	23941.9	51.25 PK	74	-22.75	-55.32	-55.47	8.37	-44.01
8	23941.9	38.81 AV	54	-15.19	-71.02	-66.01	8.37	-56.45
9	39951.73	45.99 PK	74	-28.01	-62.75	-59.24	8.37	-49.27
10	39951.73	34.16 AV	54	-19.84	-75.04	-70.88	8.37	-61.1

Note: Margin value = Emission Level - Limit value

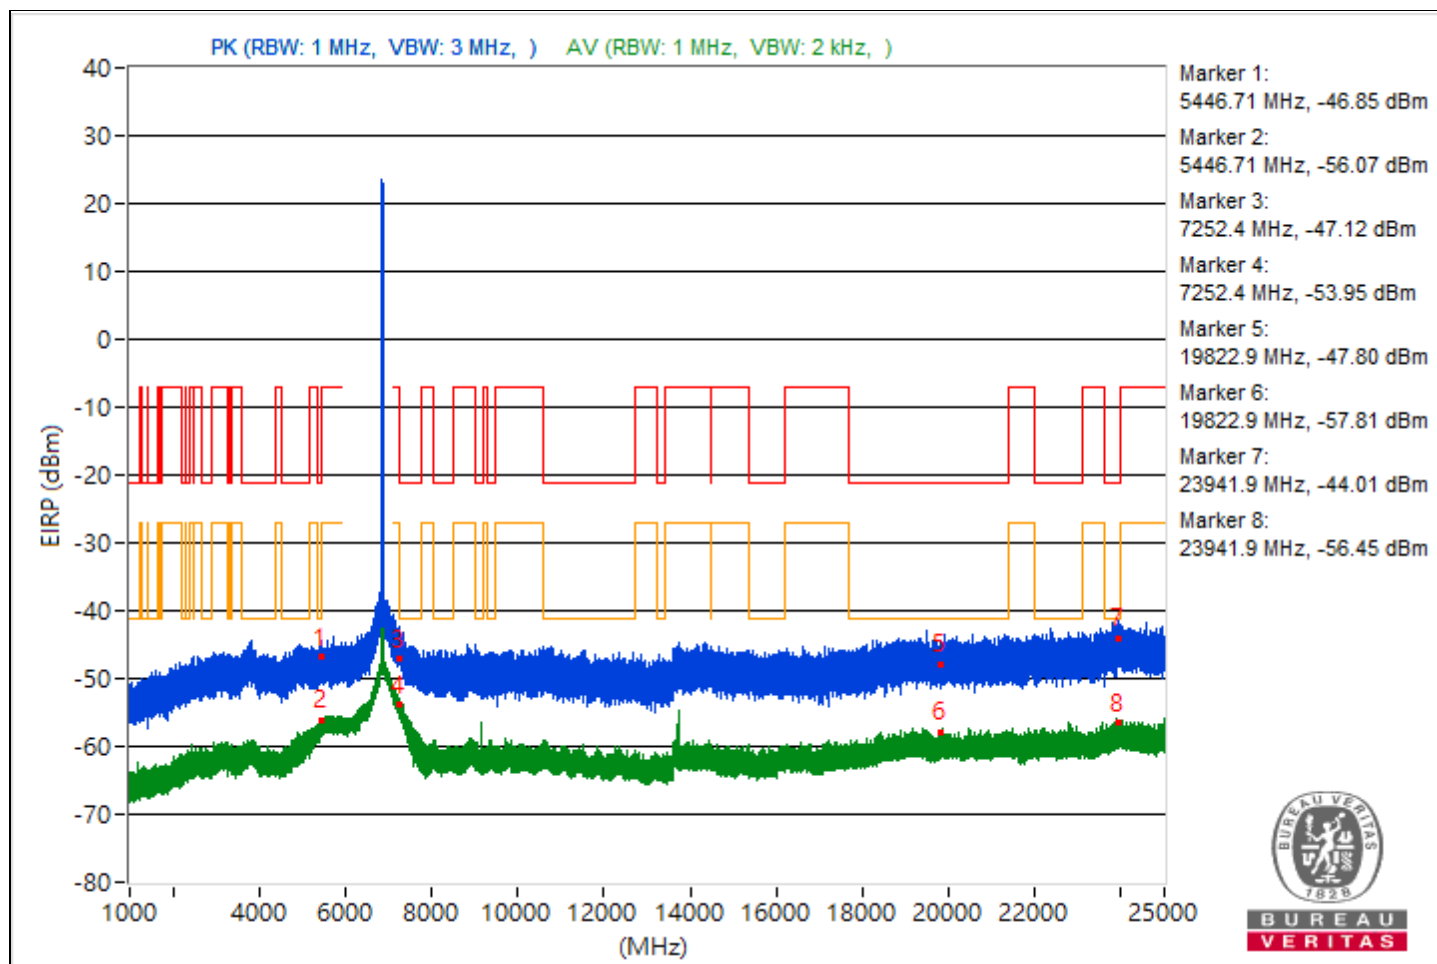

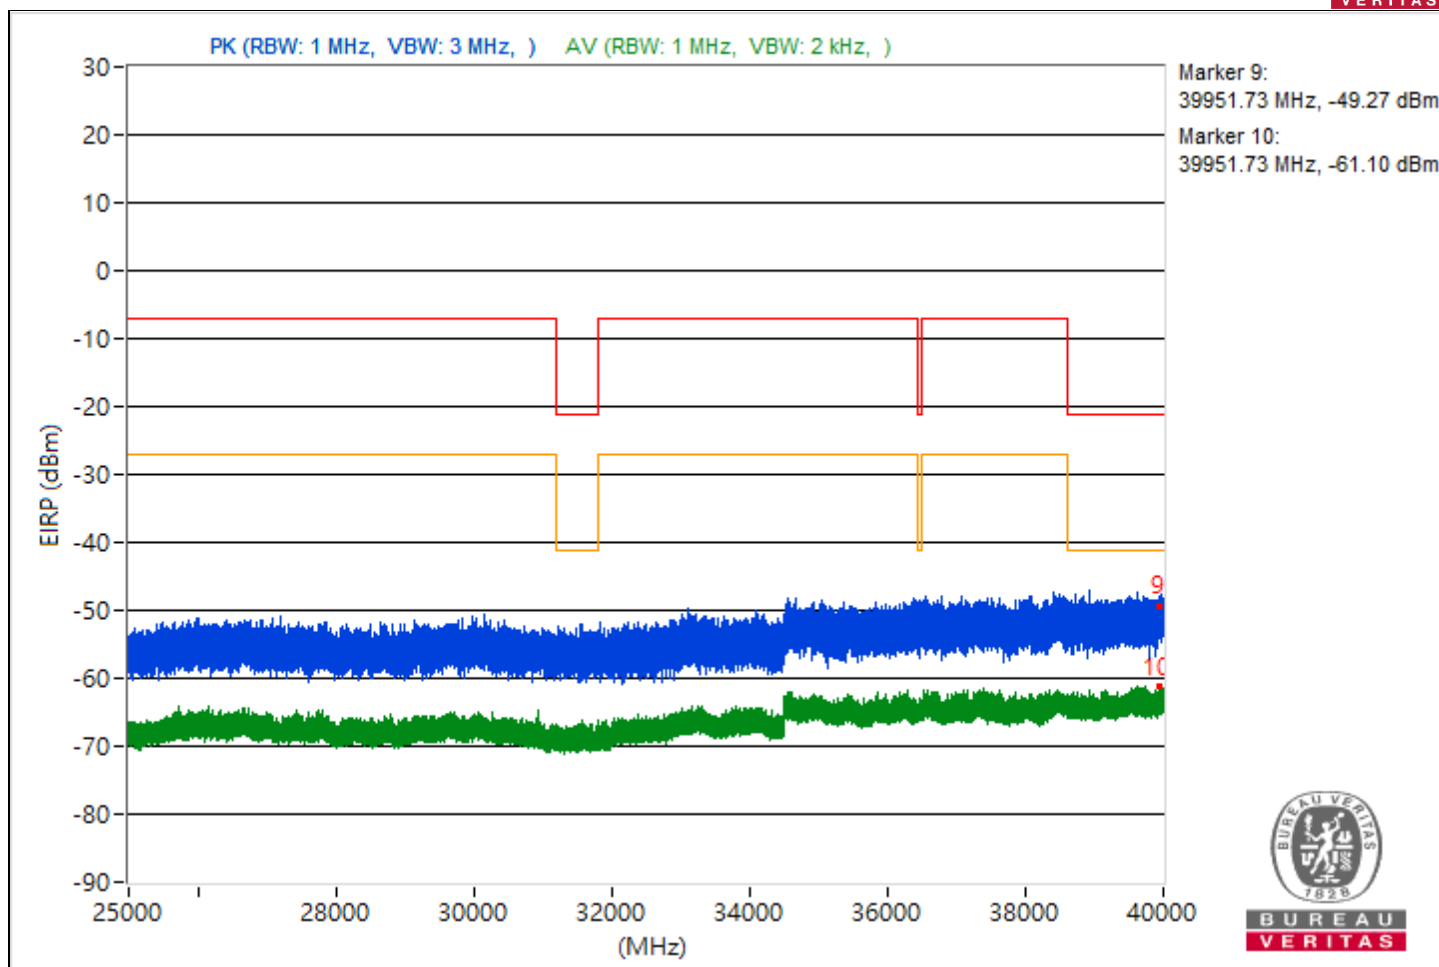



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.63	50.03 PK	74	-23.97	-56.48	-56.75	8.37	-45.23
2	5446.63	42.93 AV	54	-11.07	-63.41	-64.03	8.37	-52.33
3	#7939.96	55.09 PK	88.26	-33.17	-48.82	-60.5	8.37	-40.17
4	#7939.96	52.23 AV	68.26	-16.03	-51.52	-66.81	8.37	-43.03
5	19840.6	48.46 PK	74	-25.54	-58.8	-57.64	8.37	-46.8
6	19840.6	37.2 AV	54	-16.8	-67.78	-72.17	8.37	-58.06
7	23994.7	52.71 PK	74	-21.29	-56.11	-52.49	8.37	-42.55
8	23994.7	38.12 AV	54	-15.88	-70.77	-67.04	8.37	-57.14
9	39602.67	43.22 PK	74	-30.78	-63.16	-63.7	8.37	-52.04
10	39602.67	33.95 AV	54	-20.05	-72.02	-73.49	8.37	-61.31

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

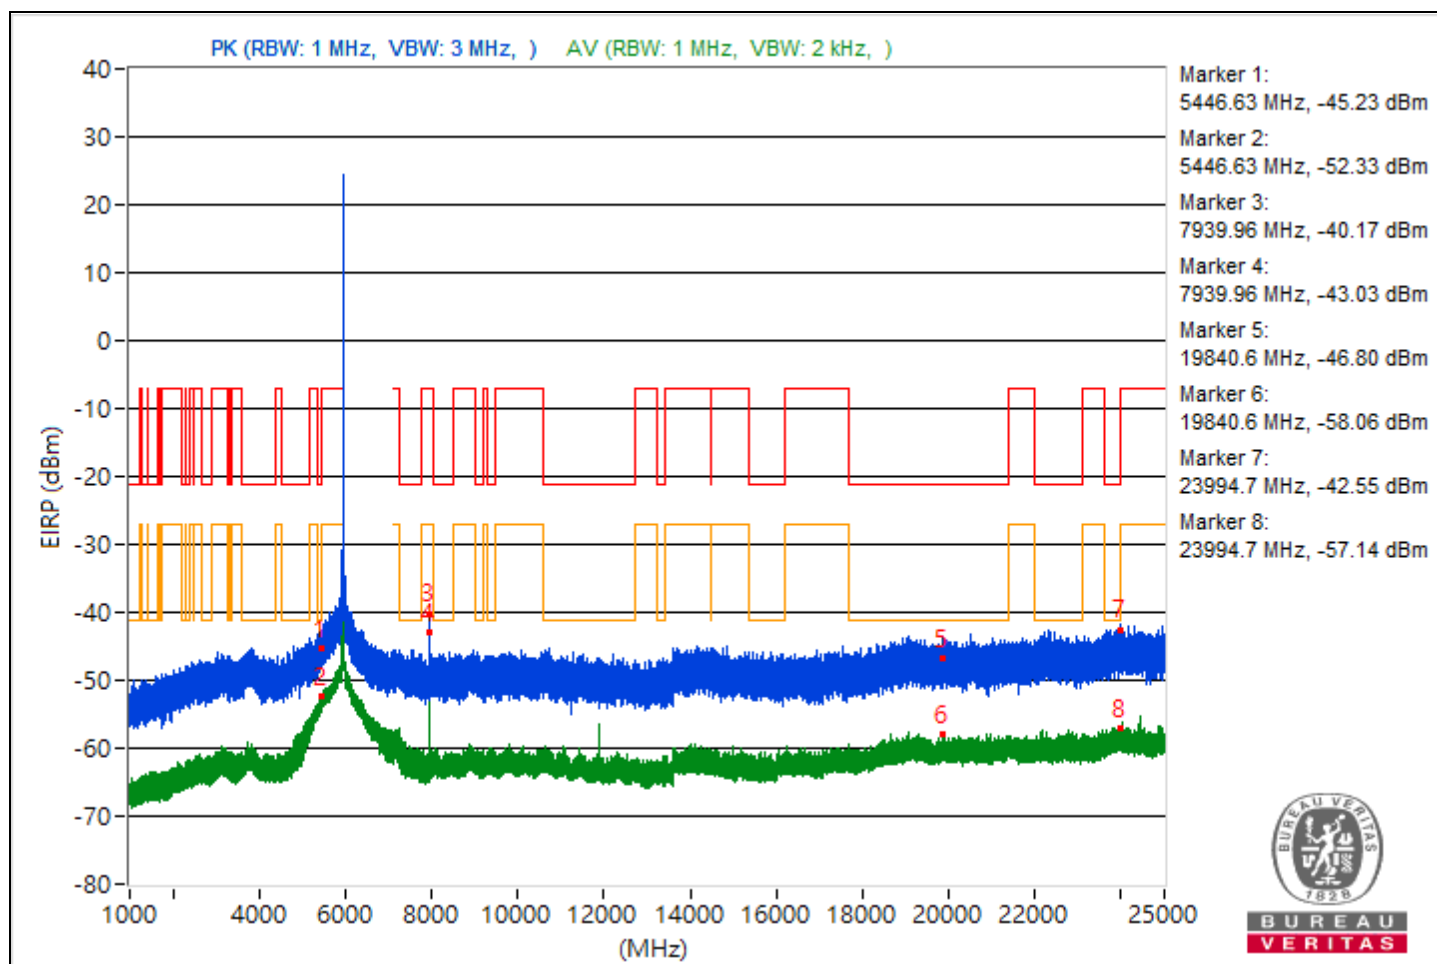

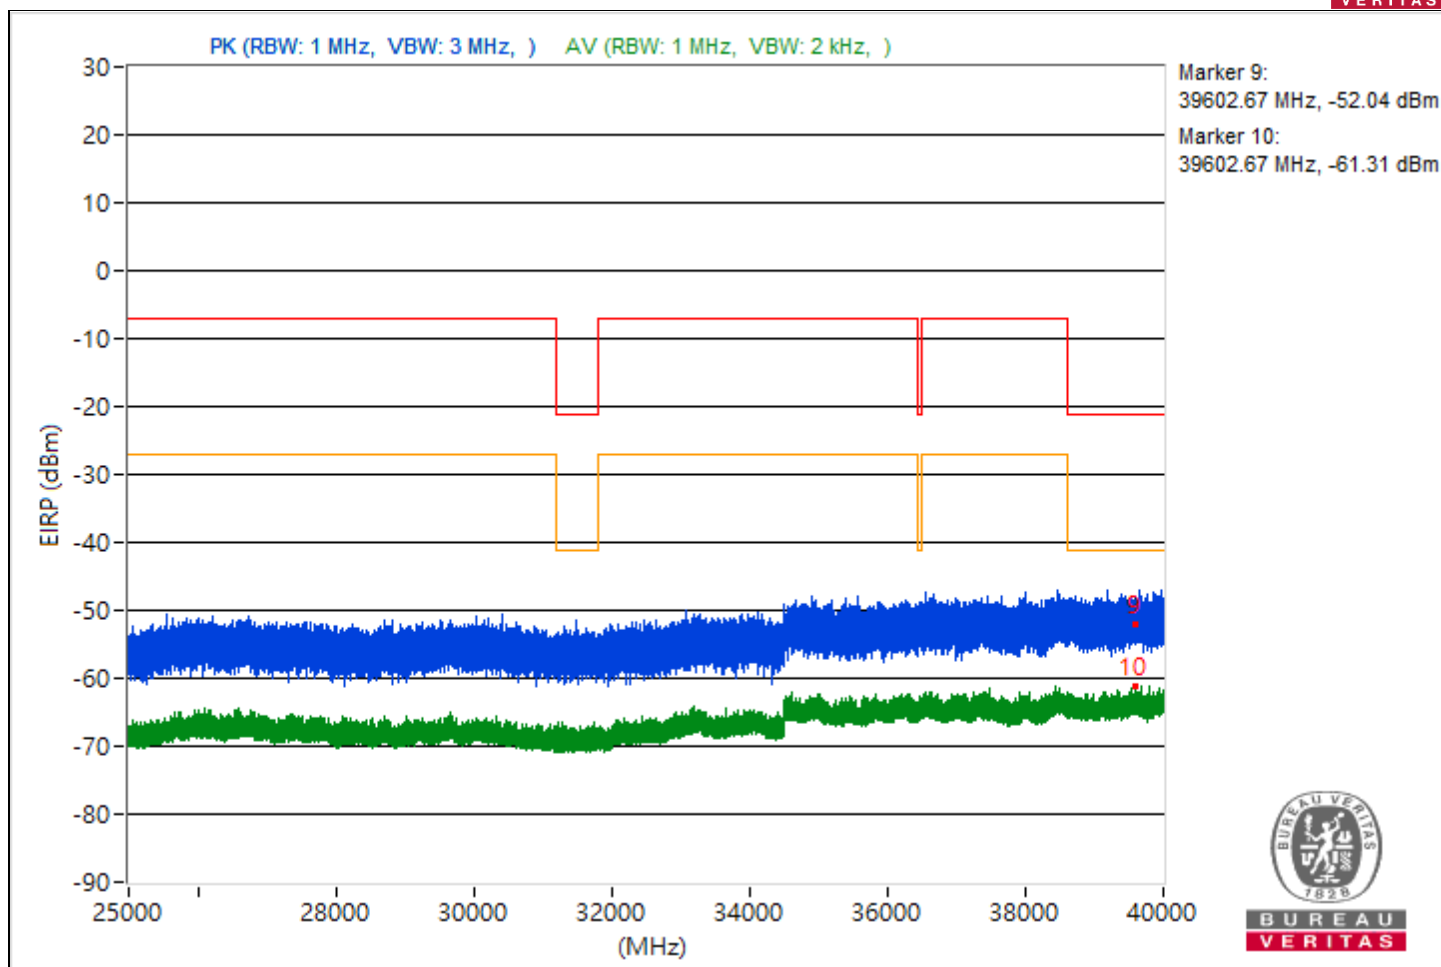



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.78	47.62 PK	74	-26.38	-60.21	-58.09	8.37	-47.64
2	5459.78	40.59 AV	54	-13.41	-66.57	-65.58	8.37	-54.67
3	7252.24	48.68 PK	74	-25.32	-57.57	-58.38	8.37	-46.58
4	7252.24	39.21 AV	54	-14.79	-67.12	-67.76	8.37	-56.05
5	21296.6	47.8 PK	74	-26.2	-58.27	-59.5	8.37	-47.46
6	21296.6	37.52 AV	54	-16.48	-68	-70.64	8.37	-57.74
7	23984.1	49.78 PK	74	-24.22	-57.28	-56.48	8.37	-45.48
8	23984.1	39.08 AV	54	-14.92	-66.23	-69.49	8.37	-56.18
9	39933.24	43.86 PK	74	-30.14	-62.66	-62.9	8.37	-51.4
10	39933.24	33.96 AV	54	-20.04	-76.19	-70.77	8.37	-61.3

Note: Margin value = Emission Level - Limit value

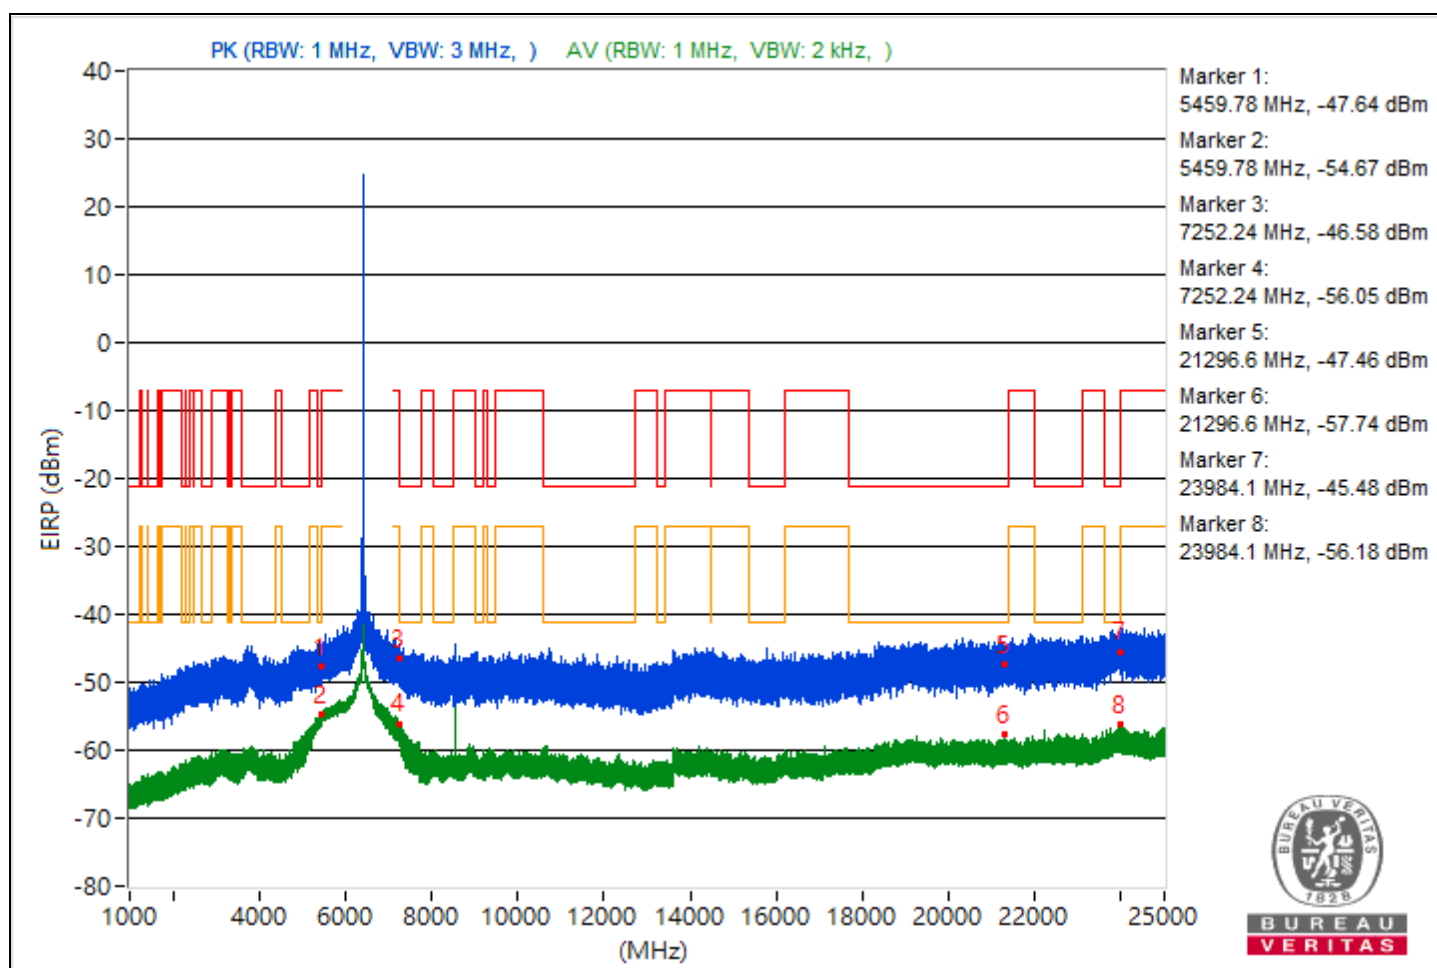


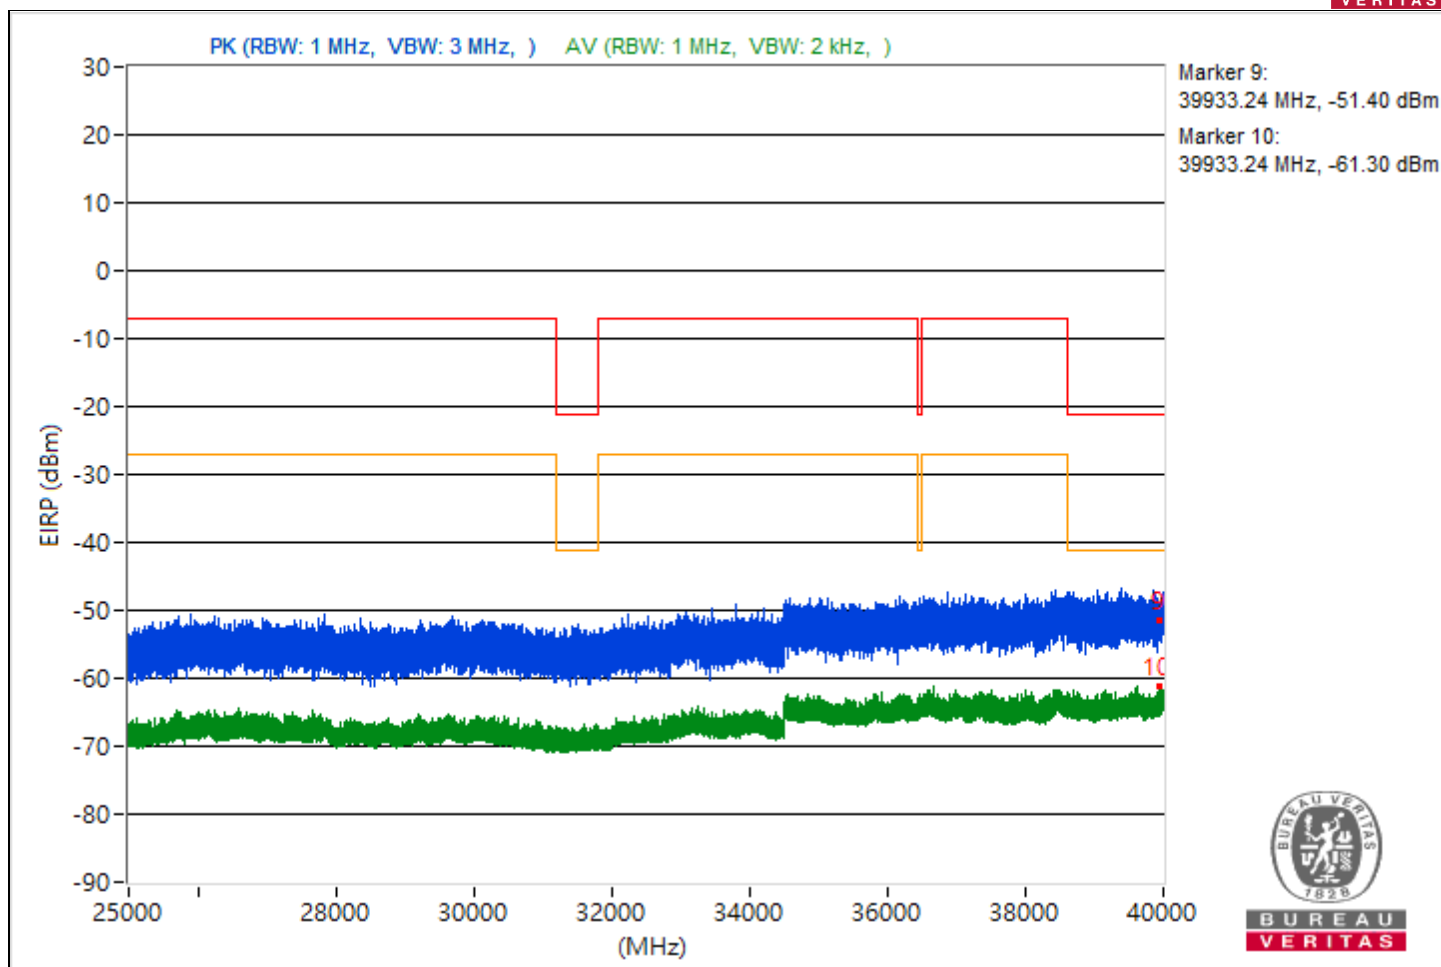


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5452	48.58 PK	74	-25.42	-58.19	-57.94	8.37	-46.68
2	5452	40.44 AV	54	-13.56	-65.72	-66.75	8.37	-54.82
3	7255.51	48.74 PK	74	-25.26	-56.57	-59.84	8.37	-46.52
4	7255.51	39.44 AV	54	-14.56	-67.24	-67.16	8.37	-55.82
5	19240	45.27 PK	74	-28.73	-60.2	-62.98	8.37	-49.99
6	19240	37.61 AV	54	-16.39	-67.45	-71.55	8.37	-57.65
7	23766.1	49.89 PK	74	-24.11	-57.7	-55.96	8.37	-45.37
8	23766.1	38.37 AV	54	-15.63	-70.74	-66.71	8.37	-56.89
9	39647.2	45.23 PK	74	-28.77	-61.1	-61.74	8.37	-50.03
10	39647.2	33.45 AV	54	-20.55	-76.19	-71.43	8.37	-61.81

Note: Margin value = Emission Level - Limit value

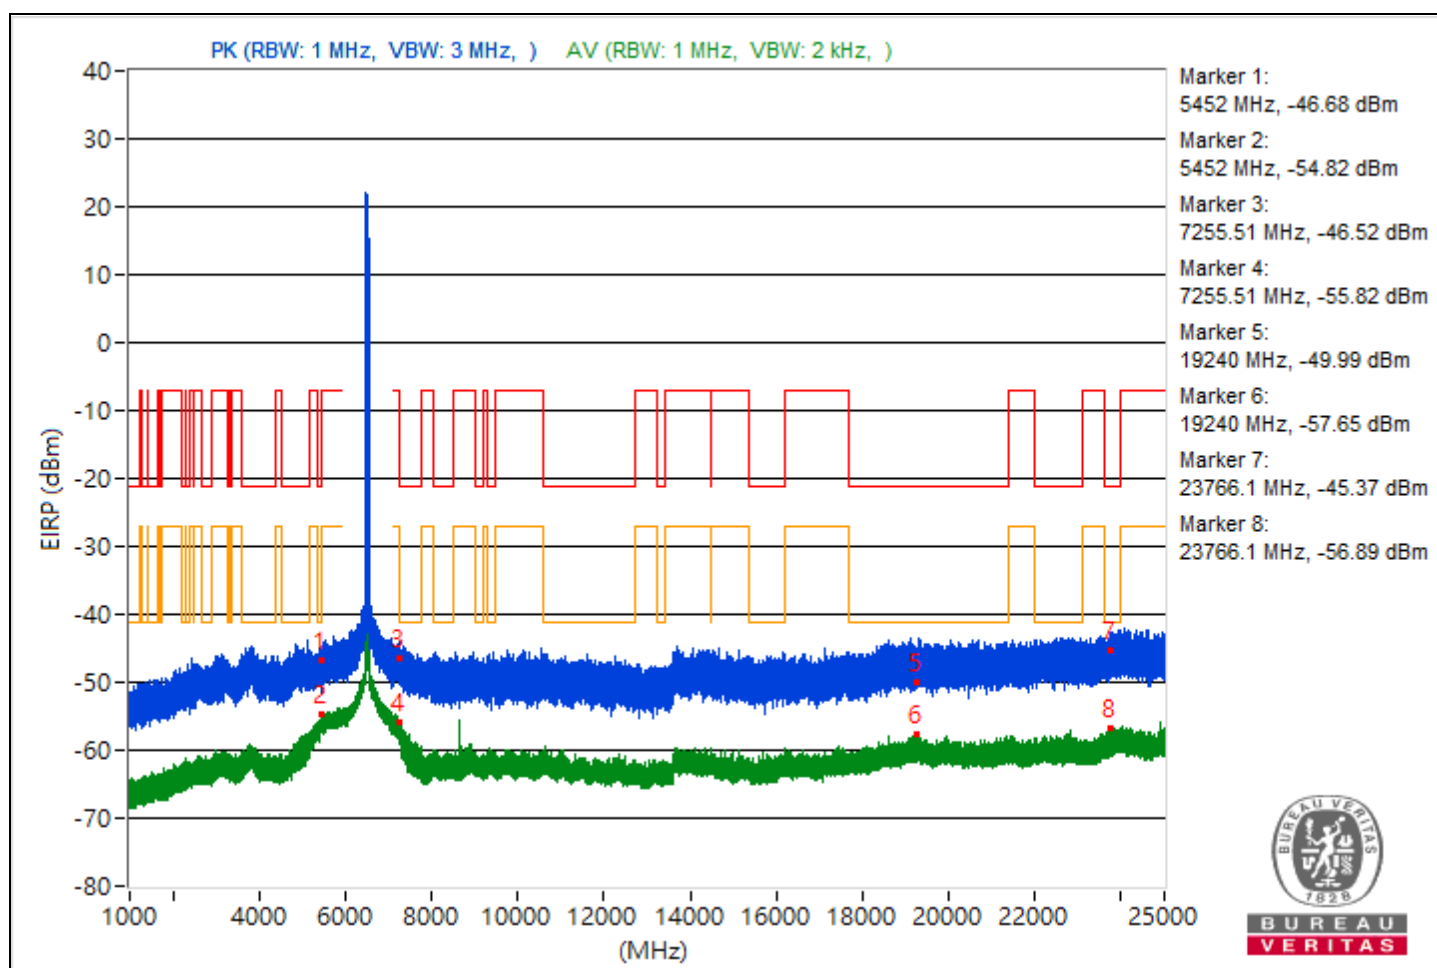


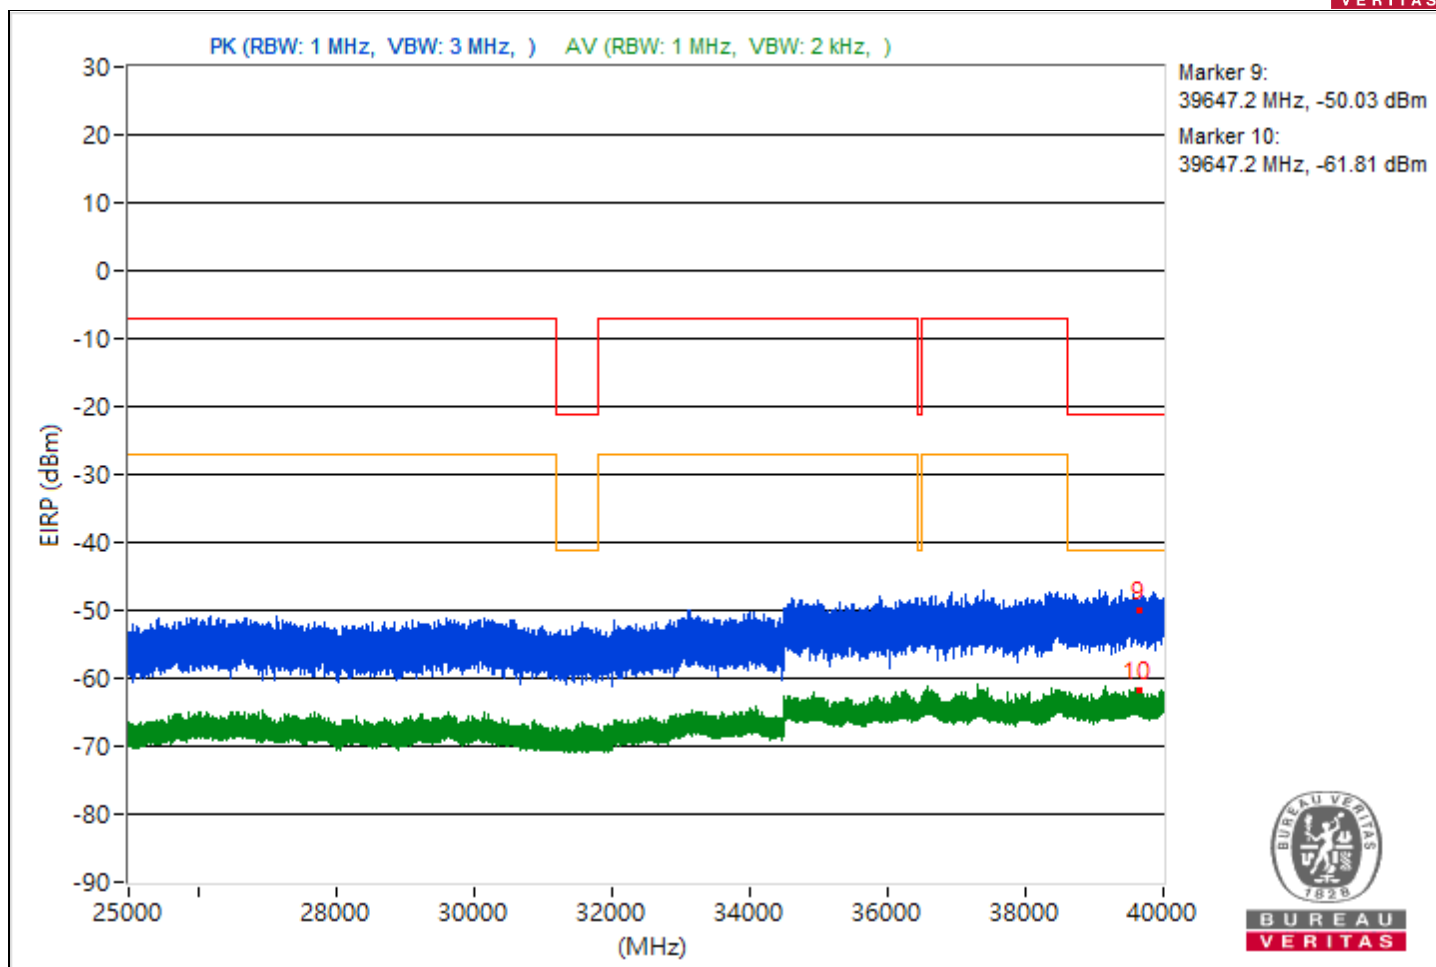


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5447.64	47.8 PK	74	-26.2	-58.28	-59.5	8.37	-47.46
2	5447.64	38.25 AV	54	-15.75	-70.83	-66.84	8.37	-57.01
3	7254.27	49.67 PK	74	-24.33	-58.23	-55.99	8.37	-45.59
4	7254.27	41.4 AV	54	-12.6	-64.58	-66.02	8.37	-53.86
5	21156.5	47.8 PK	74	-26.2	-59.89	-57.99	8.37	-47.46
6	21156.5	37.68 AV	54	-16.32	-70.05	-68.09	8.37	-57.58
7	23987.5	49.06 PK	74	-24.94	-57.41	-57.77	8.37	-46.2
8	23987.5	38.67 AV	54	-15.33	-70.76	-66.29	8.37	-56.59
9	39575.73	44.81 PK	74	-29.19	-61.98	-61.69	8.37	-50.45
10	39575.73	33.69 AV	54	-20.31	-71.36	-75.49	8.37	-61.57

Note: Margin value = Emission Level - Limit value

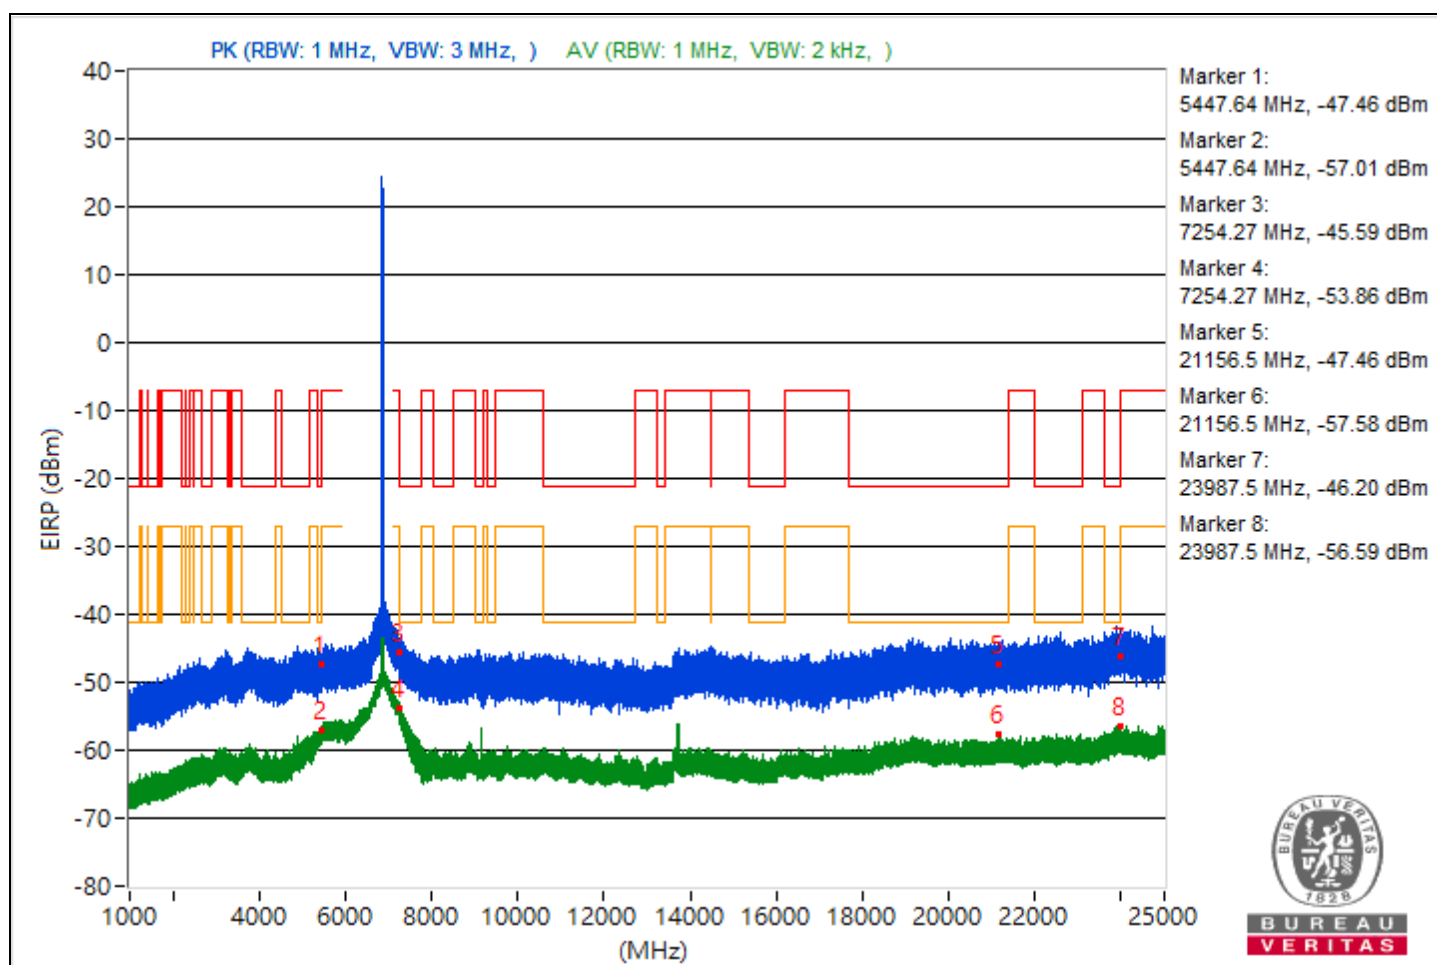

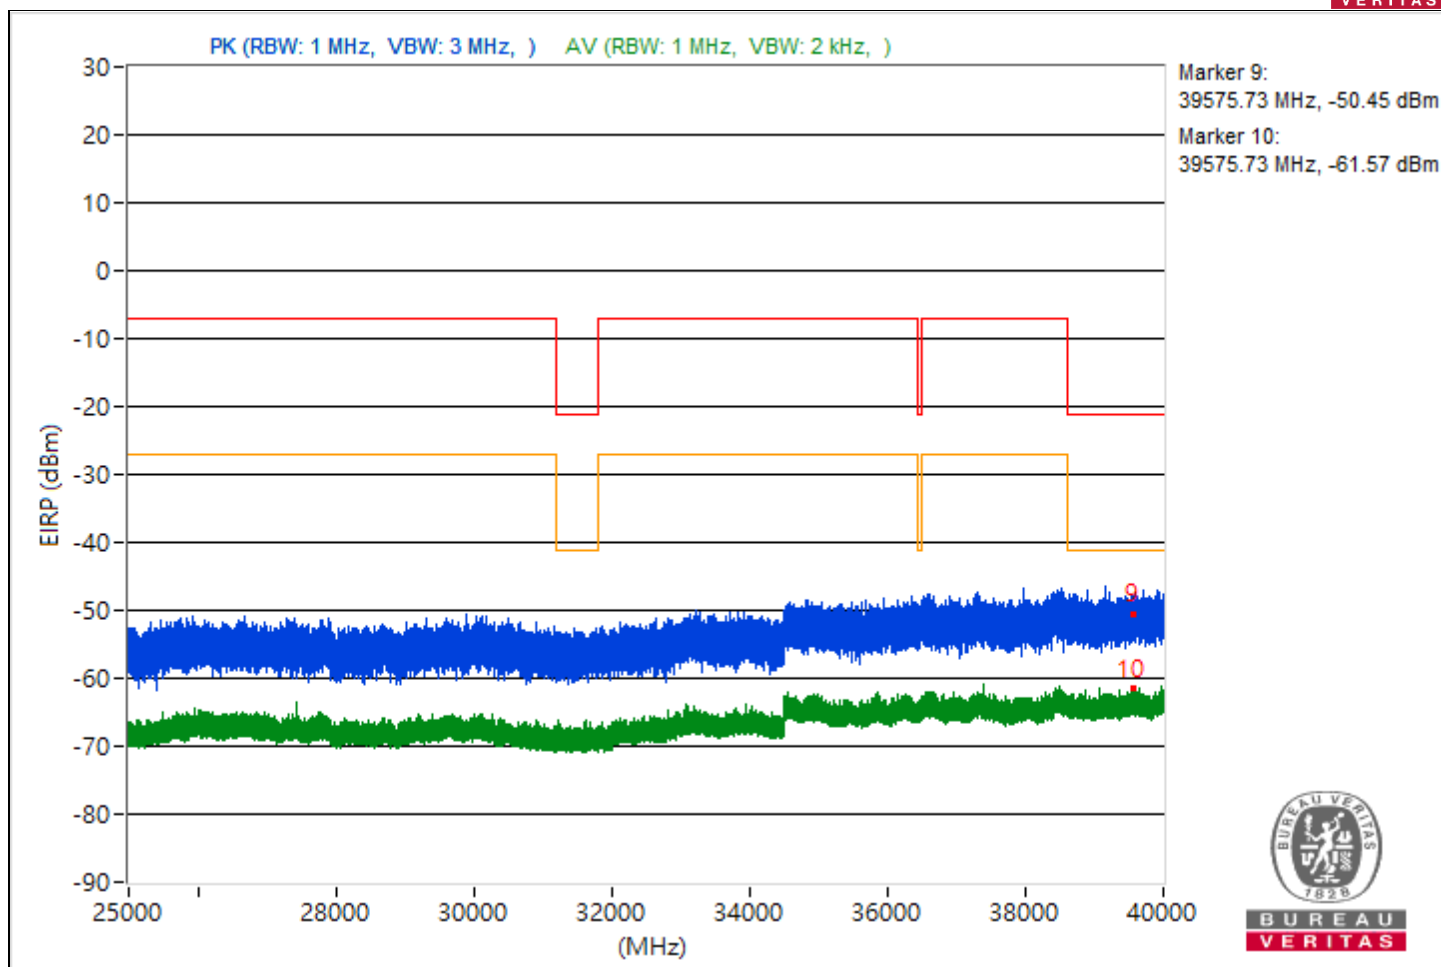



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5443.52	48.06 PK	74	-25.94	-59.01	-58.18	8.37	-47.2
2	5443.52	43.05 AV	54	-10.95	-63.38	-63.8	8.37	-52.21
3	#7940.03	53.47 PK	88.26	-34.79	-50.49	-61.56	8.37	-41.79
4	#7940.03	52.24 AV	68.26	-16.02	-51.5	-67.18	8.37	-43.02
5	21331.2	47.39 PK	74	-26.61	-59.09	-59.43	8.37	-47.87
6	21331.2	37.48 AV	54	-16.52	-71.41	-67.69	8.37	-57.78
7	23919.5	50.52 PK	74	-23.48	-54.17	-59.73	8.37	-44.74
8	23919.5	38.47 AV	54	-15.53	-66.47	-71.01	8.37	-56.79
9	38614.58	45.13 PK	74	-28.87	-60.96	-62.14	8.37	-50.13
10	38614.58	33.42 AV	54	-20.58	-71.49	-76.14	8.37	-61.84

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

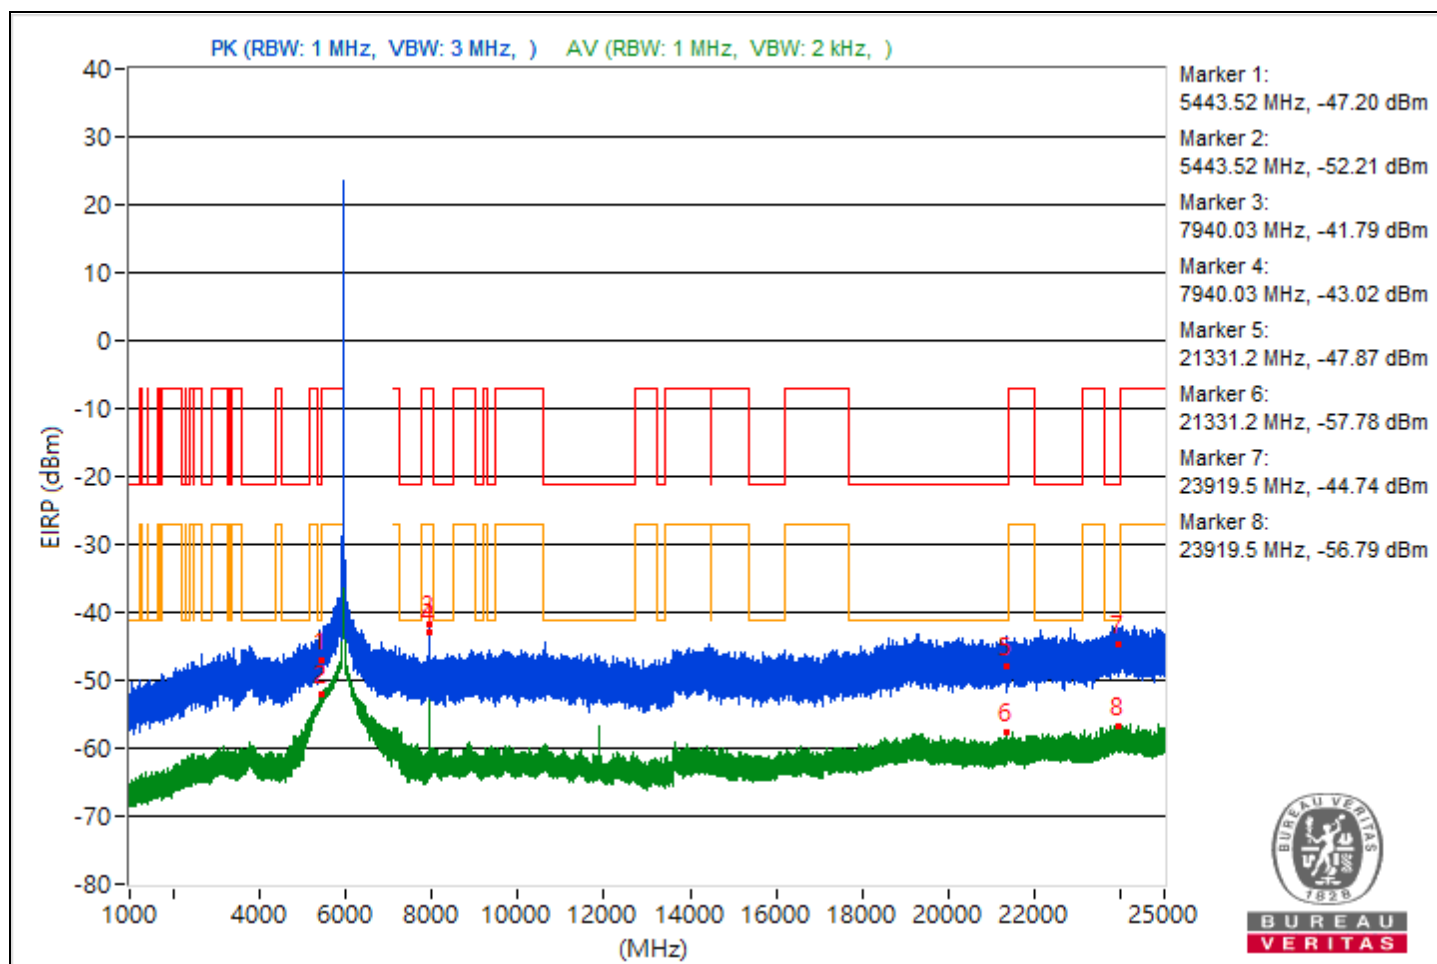


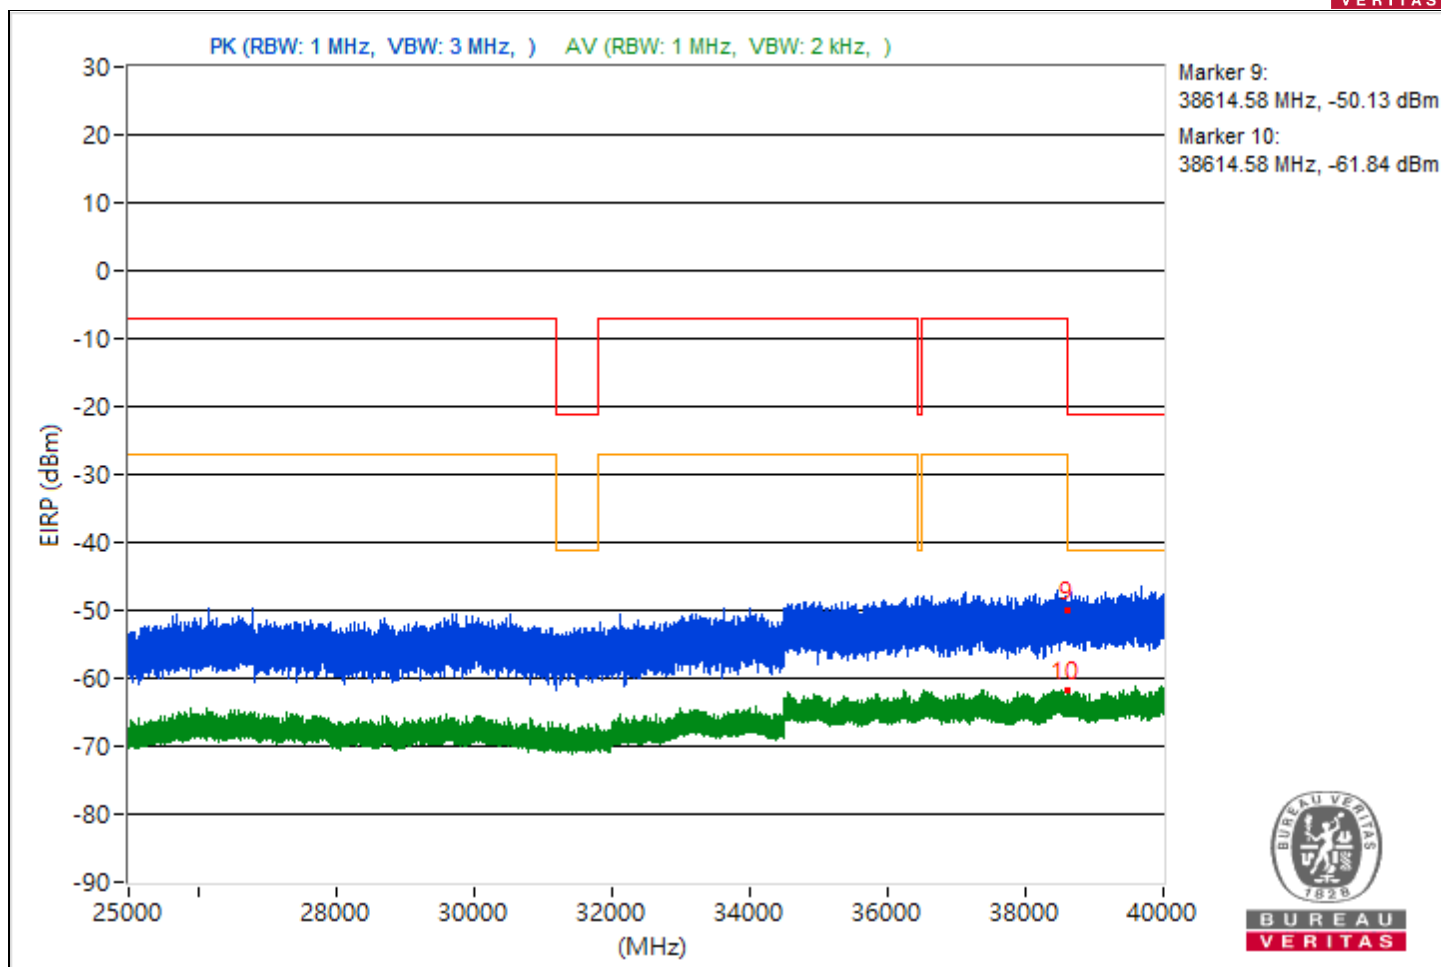

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.34	46.49 PK	74	-27.51	-60.73	-59.64	8.37	-48.77
2	5455.34	40.58 AV	54	-13.42	-65.62	-66.55	8.37	-54.68
3	7260.88	48.26 PK	74	-25.74	-58.66	-58.12	8.37	-47
4	7260.88	38.9 AV	54	-15.1	-68.98	-66.77	8.37	-56.36
5	19142.7	49.47 PK	74	-24.53	-58.39	-56.22	8.37	-45.79
6	19142.7	37.1 AV	54	-16.9	-67.68	-72.87	8.37	-58.16
7	23950.8	49.85 PK	74	-24.15	-58.99	-55.34	8.37	-45.41
8	23950.8	38.98 AV	54	-15.02	-66.49	-69.28	8.37	-56.28
9	39974.84	43.68 PK	74	-30.32	-61.25	-65.82	8.37	-51.58
10	39974.84	34.04 AV	54	-19.96	-71.03	-75.1	8.37	-61.22

Note: Margin value = Emission Level - Limit value

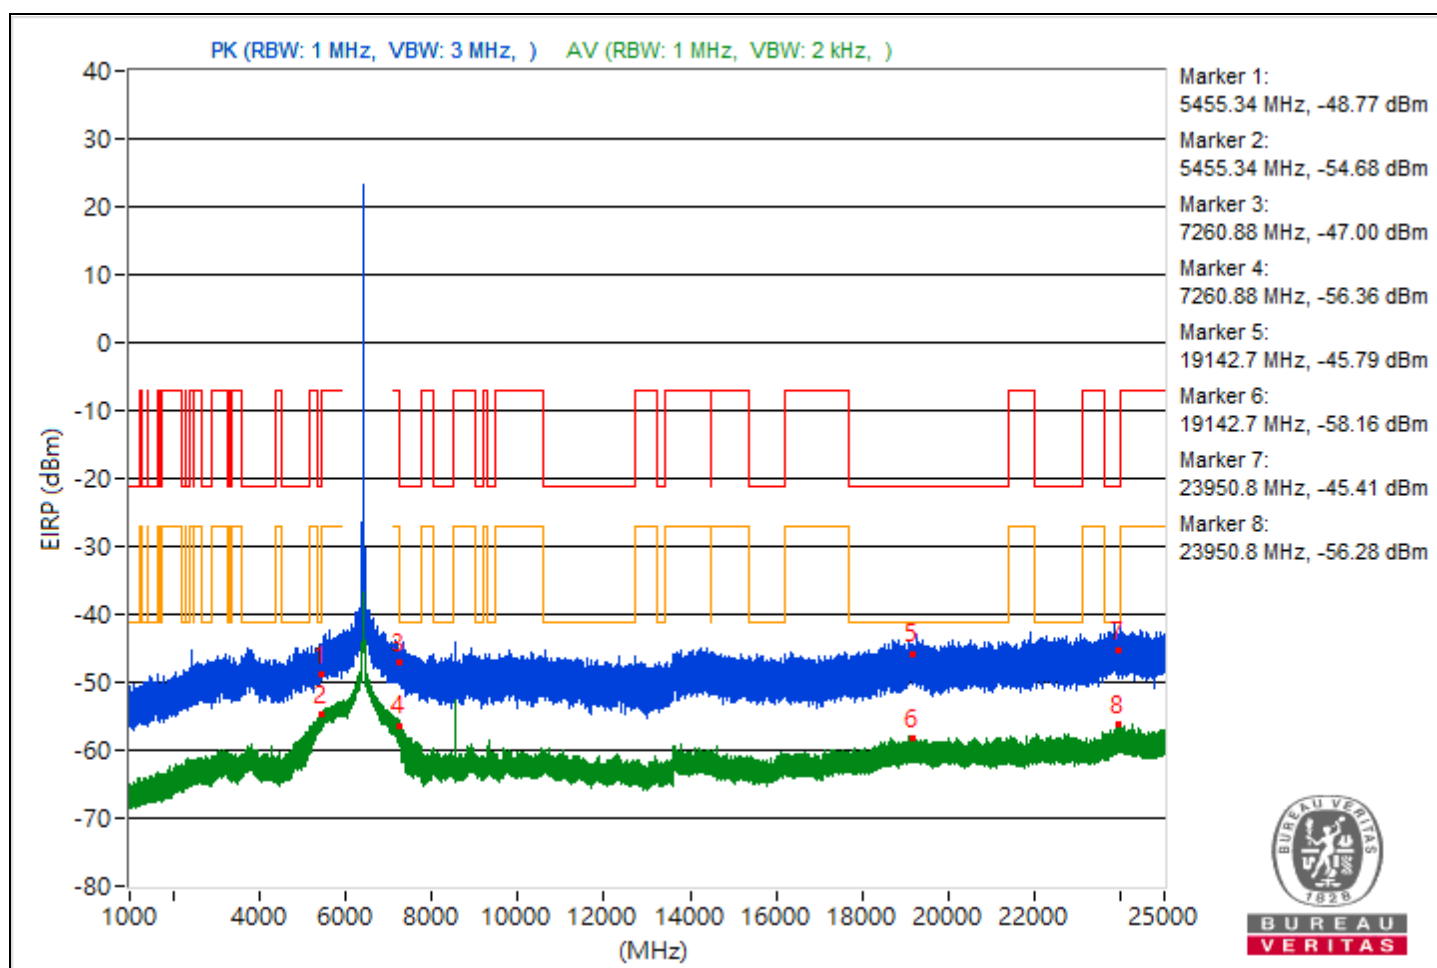





RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5432.48	48.11 PK	74	-25.89	-58.36	-58.71	8.37	-47.15
2	5432.48	39.46 AV	54	-14.54	-67.92	-66.55	8.37	-55.8
3	7255.43	47.65 PK	74	-26.35	-58.39	-59.7	8.37	-47.61
4	7255.43	38.8 AV	54	-15.2	-67.17	-68.62	8.37	-56.46
5	19264.2	47.15 PK	74	-26.85	-57.85	-62.15	8.37	-48.11
6	19264.2	37.81 AV	54	-16.19	-69.65	-68.14	8.37	-57.45
7	23896	50.84 PK	74	-23.16	-54.85	-57.01	8.37	-44.42
8	23896	38.58 AV	54	-15.42	-70.33	-66.58	8.37	-56.68
9	39994.76	43.05 PK	74	-30.95	-64.34	-62.95	8.37	-52.21
10	39994.76	34.02 AV	54	-19.98	-71.78	-73.67	8.37	-61.24

Note: Margin value = Emission Level - Limit value

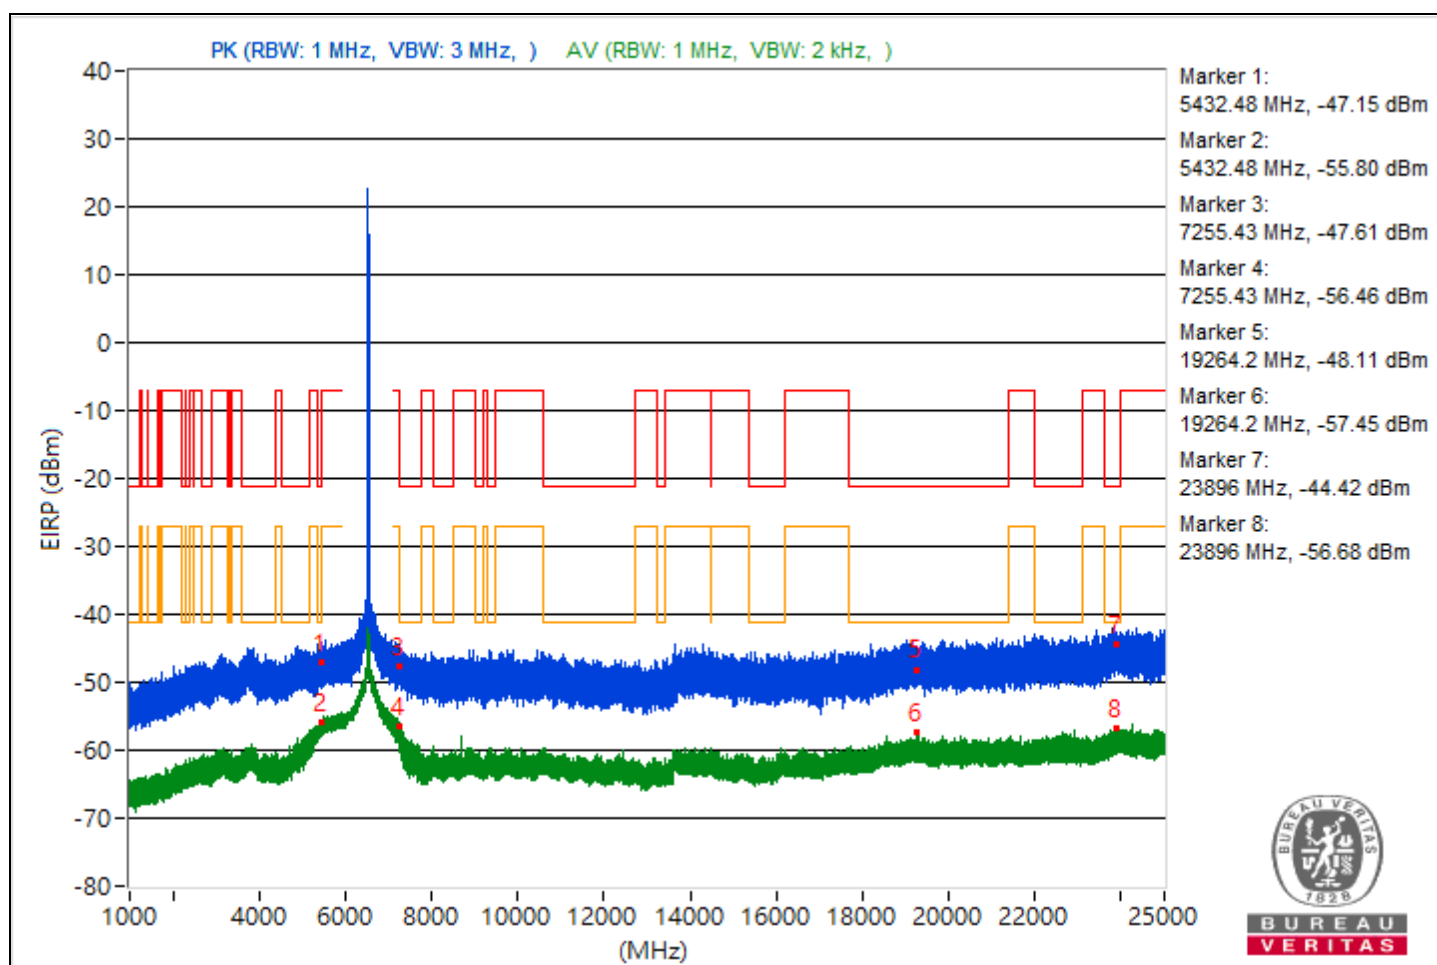


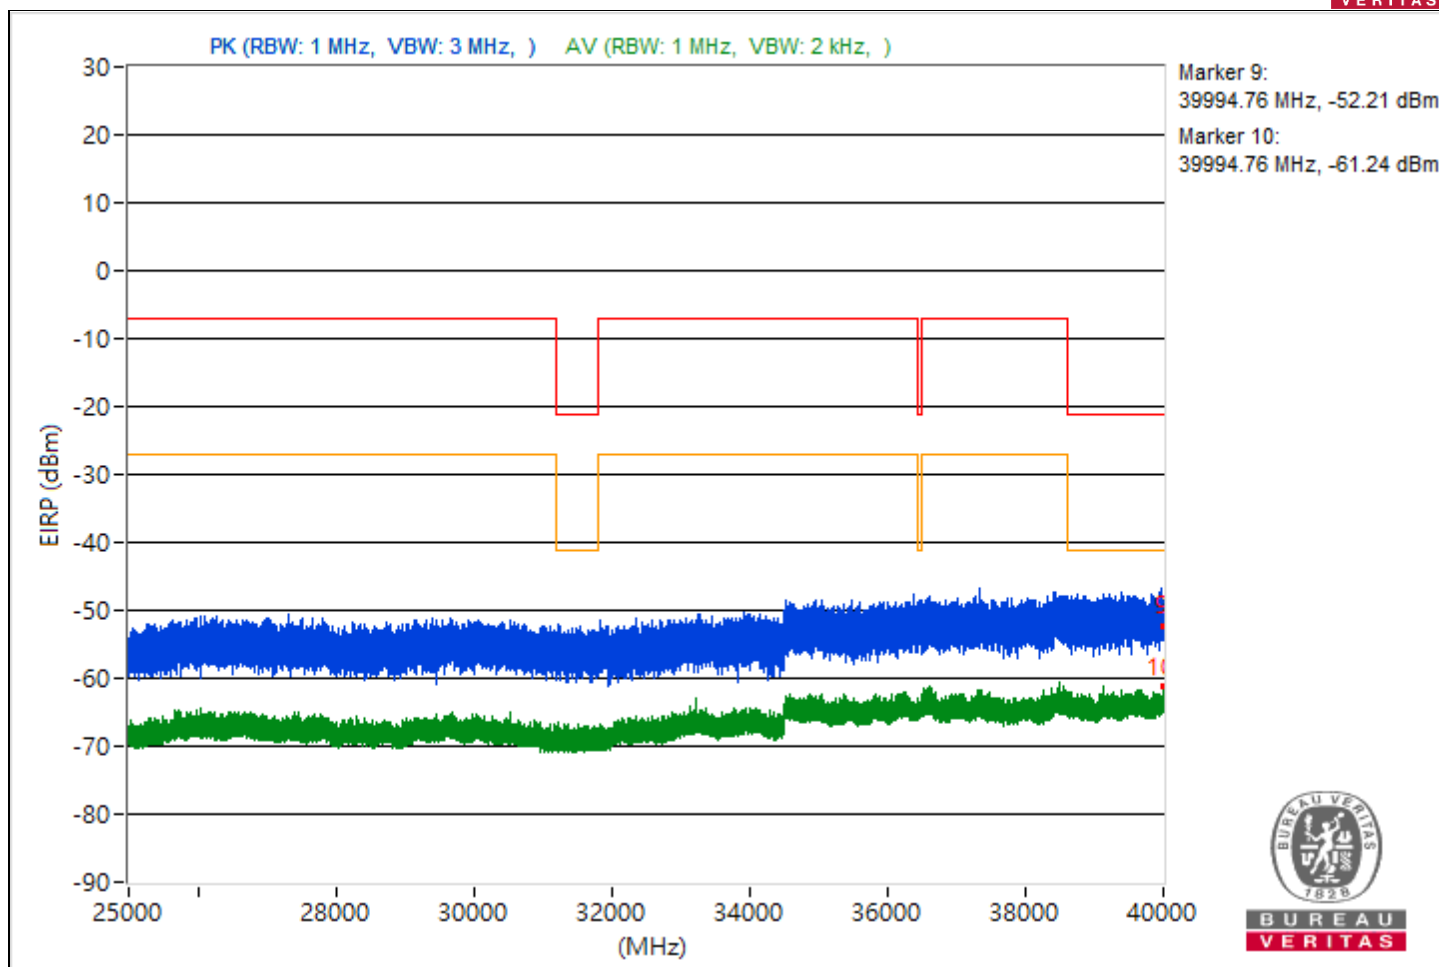


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5438.47	46.38 PK	74	-27.62	-60.32	-60.19	8.37	-48.88
2	5438.47	38.35 AV	54	-15.65	-69.19	-67.55	8.37	-56.91
3	7254.27	47.37 PK	74	-26.63	-58	-61.09	8.37	-47.89
4	7254.27	41.08 AV	54	-12.92	-64.35	-67.24	8.37	-54.18
5	19461.8	47.08 PK	74	-26.92	-59.04	-60.15	8.37	-48.18
6	19461.8	37.15 AV	54	-16.85	-72.55	-67.72	8.37	-58.11
7	23980.8	50.19 PK	74	-23.81	-57.74	-55.45	8.37	-45.07
8	23980.8	38.62 AV	54	-15.38	-66.98	-69.39	8.37	-56.64
9	39537.07	42.84 PK	74	-31.16	-62.86	-65.01	8.37	-52.42
10	39537.07	33.91 AV	54	-20.09	-71.53	-74.39	8.37	-61.35

Note: Margin value = Emission Level - Limit value

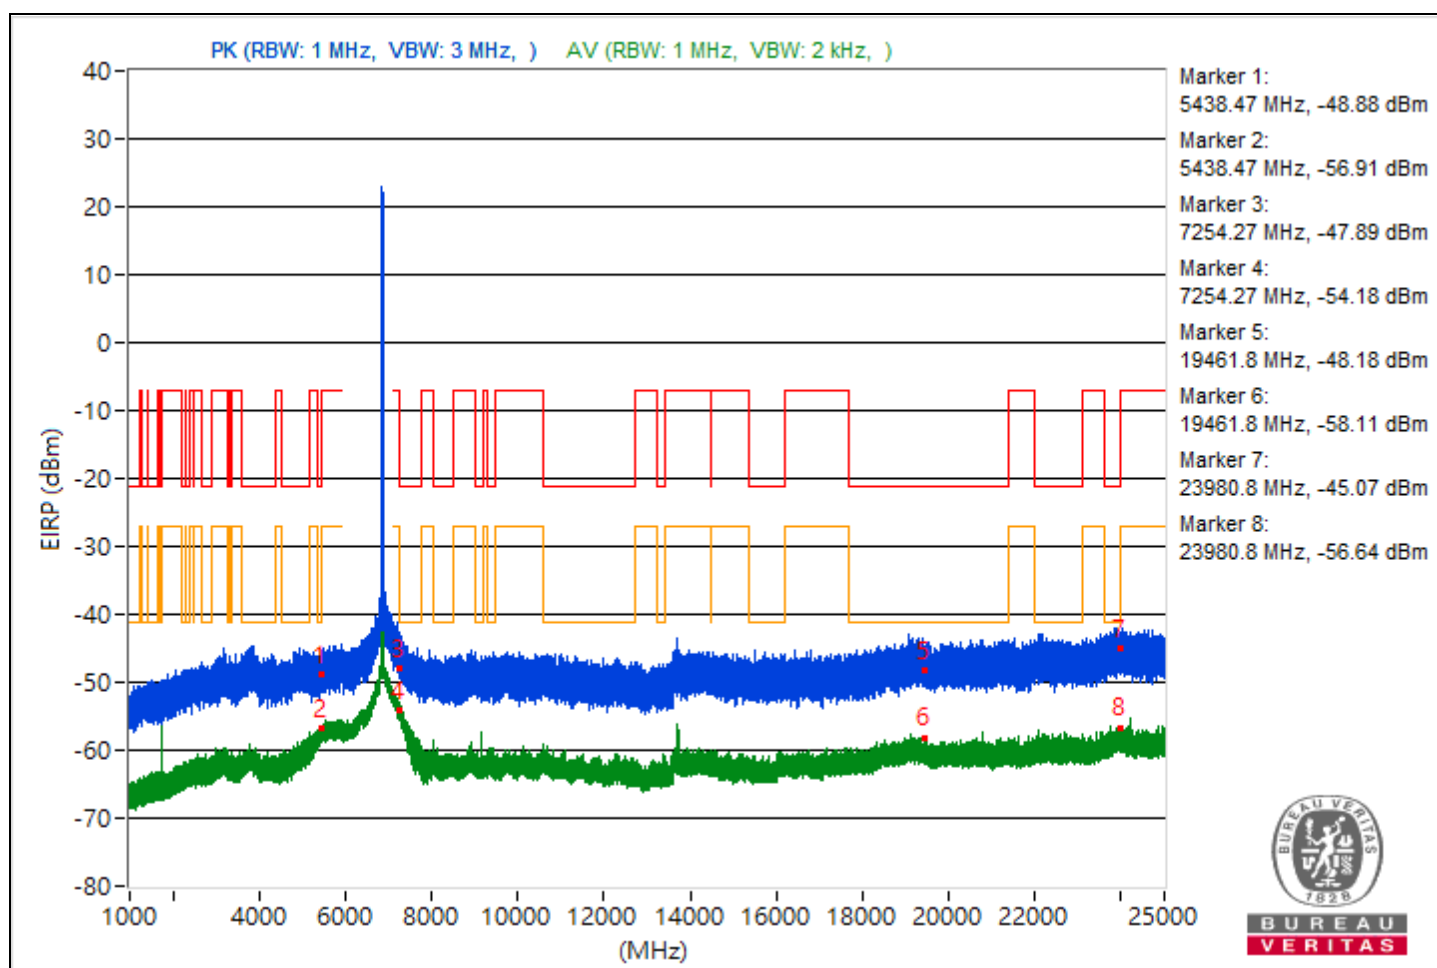


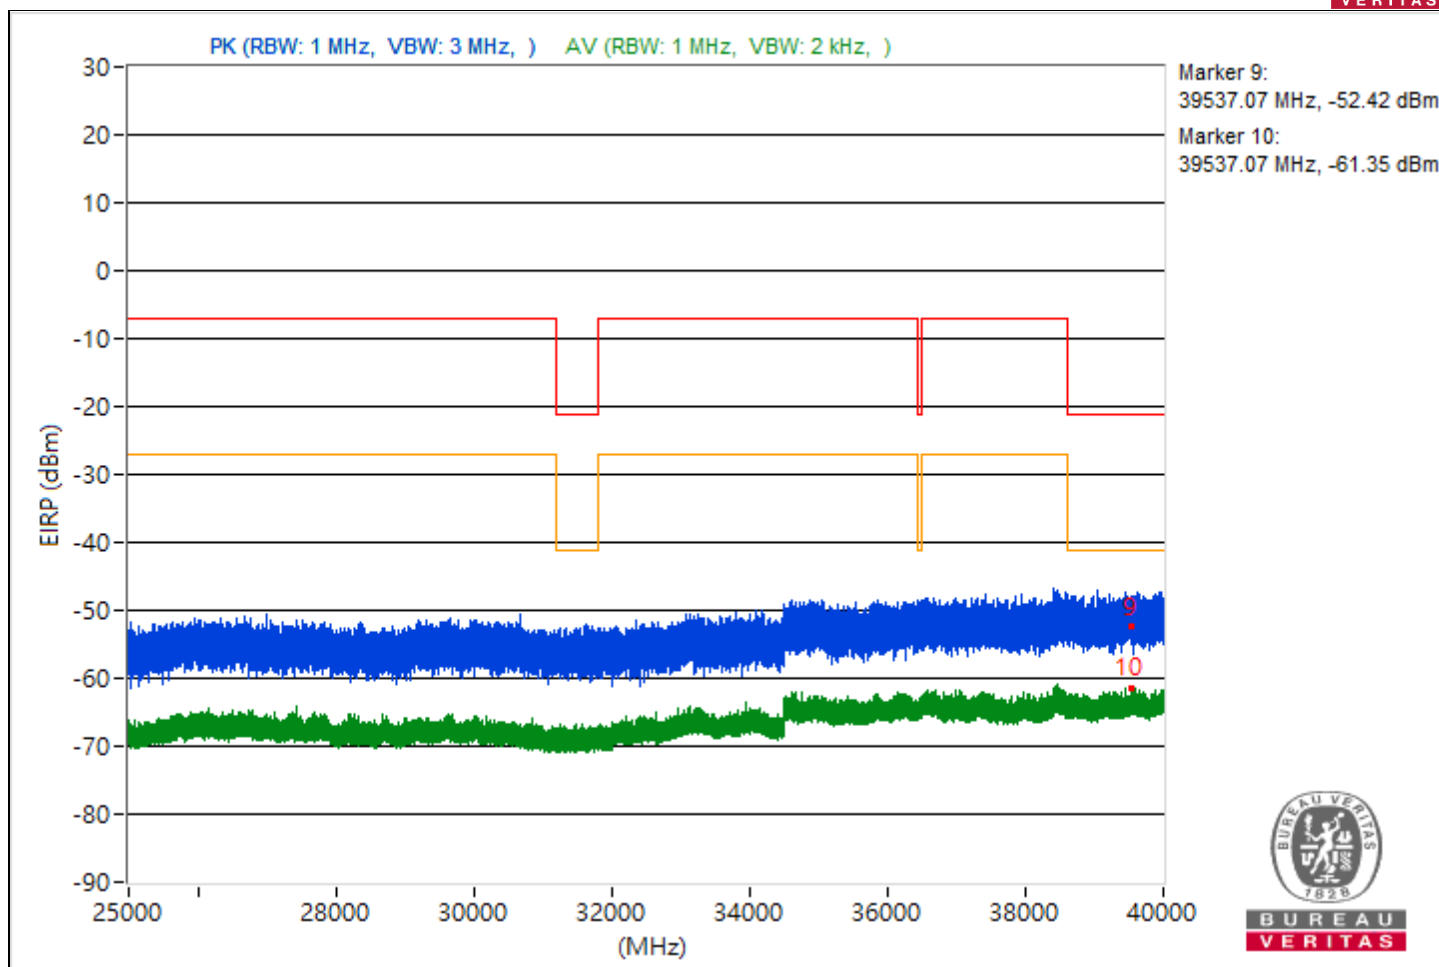


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459	49.63 PK	74	-24.37	-56.5	-57.59	8.37	-45.63
2	5459	42.89 AV	54	-11.11	-63.56	-63.96	8.37	-52.37
3	11967.47	47.36 PK	74	-26.64	-59.86	-58.77	8.37	-47.9
4	11967.47	40.12 AV	54	-13.88	-66.71	-66.34	8.37	-55.14
5	20002.7	47.26 PK	74	-26.74	-59.47	-59.29	8.37	-48
6	20002.7	37.74 AV	54	-16.26	-67.27	-71.56	8.37	-57.52
7	23828.8	50.56 PK	74	-23.44	-57.1	-55.25	8.37	-44.7
8	23828.8	39.34 AV	54	-14.66	-65.54	-70.31	8.37	-55.92
9	39921.87	42.03 PK	74	-31.97	-67.14	-63.03	8.37	-53.23
10	39921.87	33.77 AV	54	-20.23	-71.56	-74.77	8.37	-61.49

Note: Margin value = Emission Level - Limit value

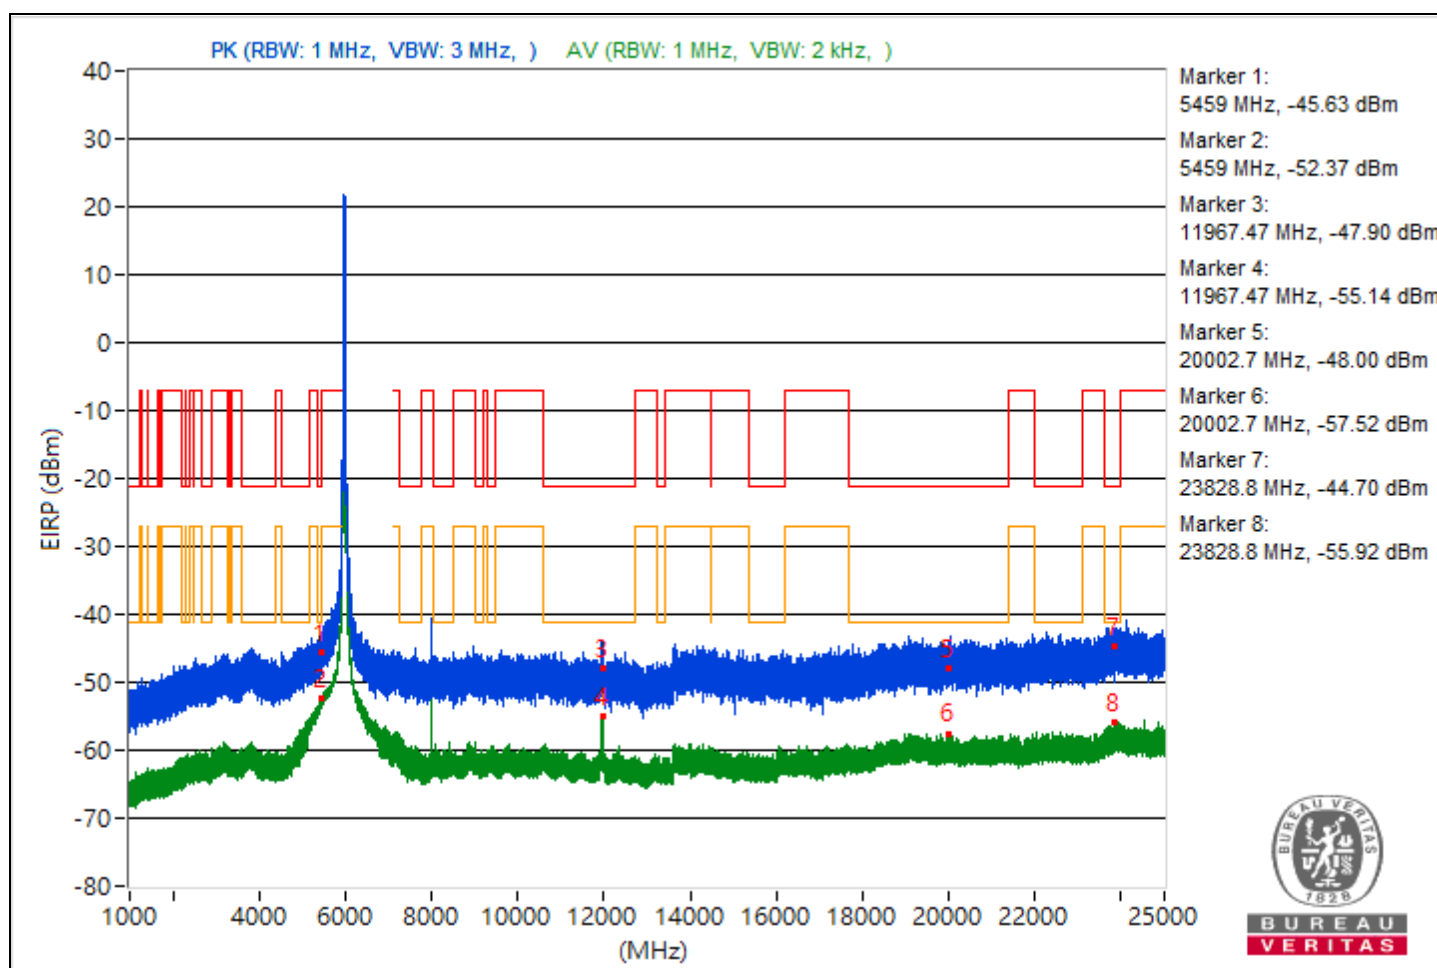


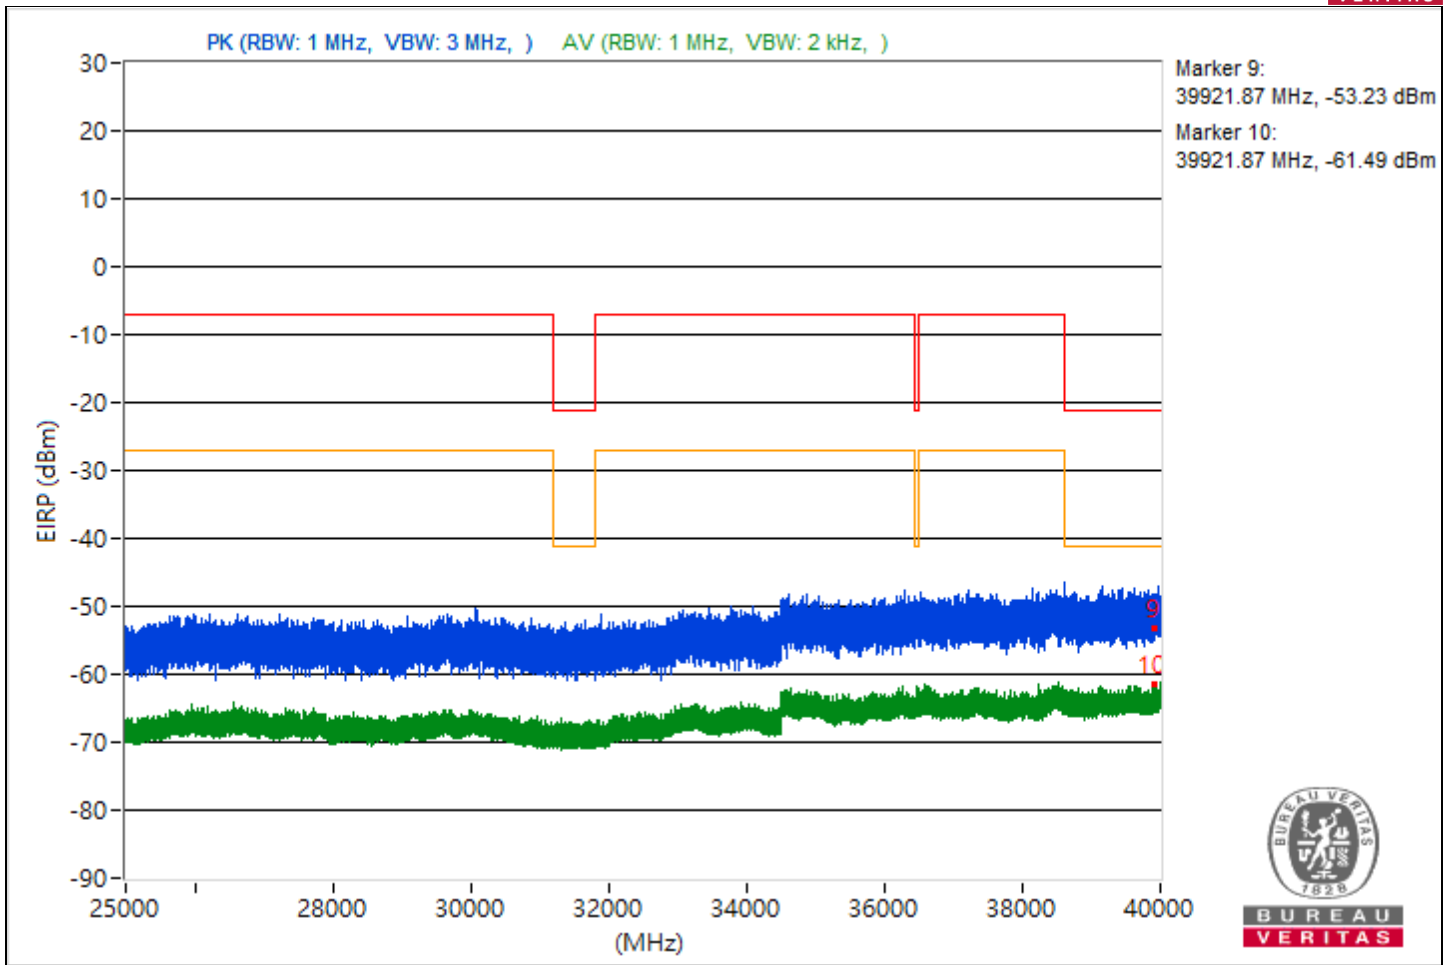


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.38	48.13 PK	74	-25.87	-58.23	-58.8	8.37	-47.13
2	5458.38	41.14 AV	54	-12.86	-64.98	-66.09	8.37	-54.12
3	7258.78	44.8 PK	74	-29.2	-61.51	-62.2	8.37	-50.46
4	7258.78	38.8 AV	54	-15.2	-67.16	-68.65	8.37	-56.46
5	21211.1	49.12 PK	74	-24.88	-57.1	-57.98	8.37	-46.14
6	21211.1	37.85 AV	54	-16.15	-70.54	-67.55	8.37	-57.41
7	23812.4	48.29 PK	74	-25.71	-59.64	-57.36	8.37	-46.97
8	23812.4	38.77 AV	54	-15.23	-69.76	-66.55	8.37	-56.49
9	39640.18	42.91 PK	74	-31.09	-63.21	-64.33	8.37	-52.35
10	39640.18	33.64 AV	54	-20.36	-75.81	-71.31	8.37	-61.62

Note: Margin value = Emission Level - Limit value

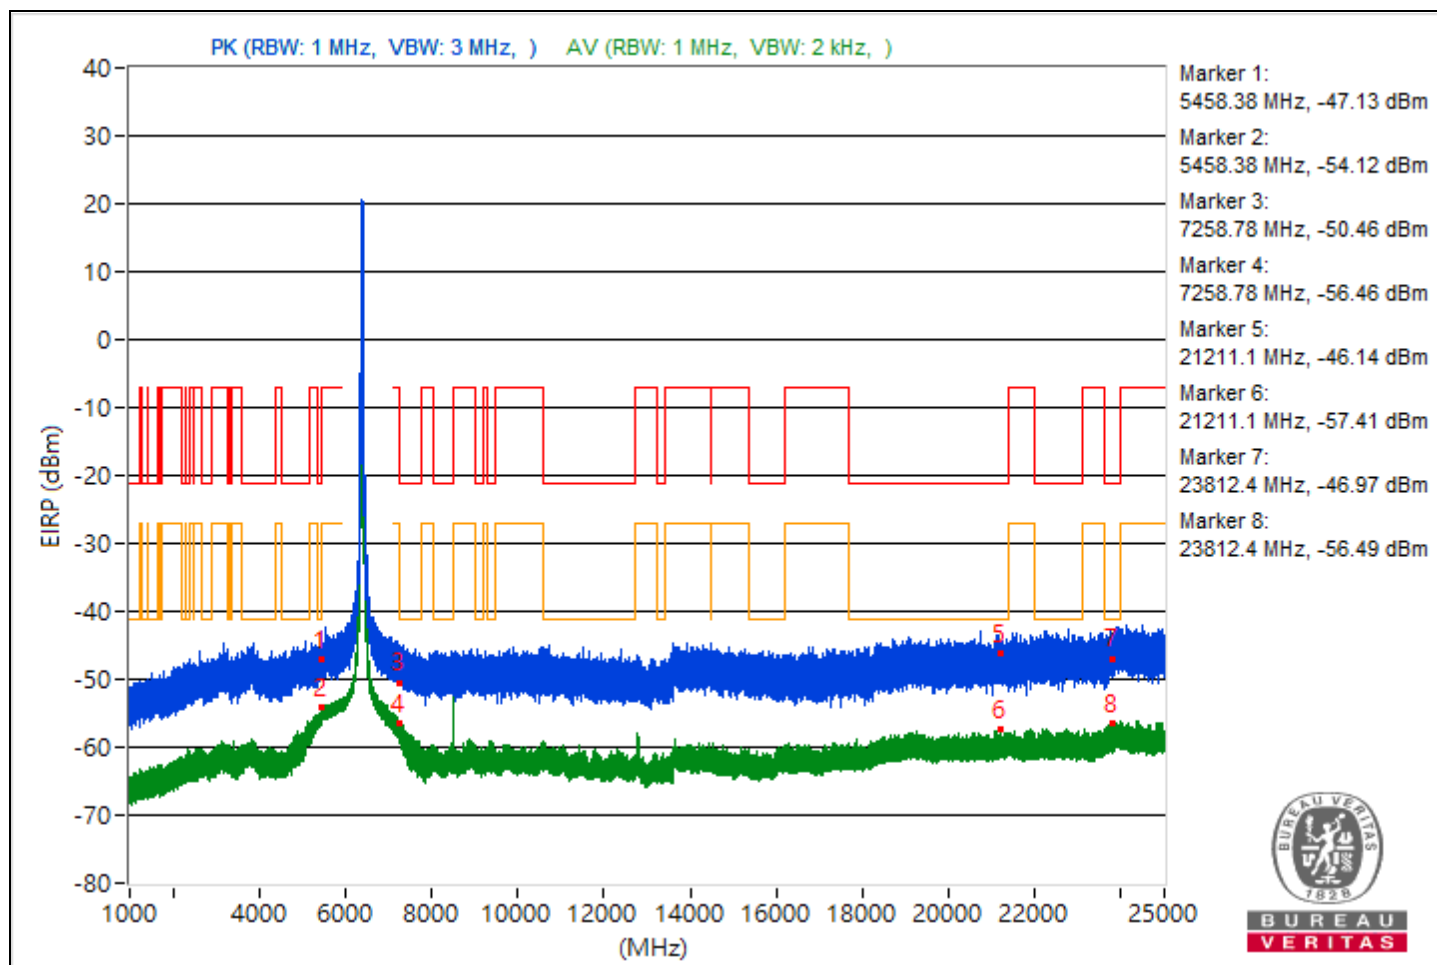


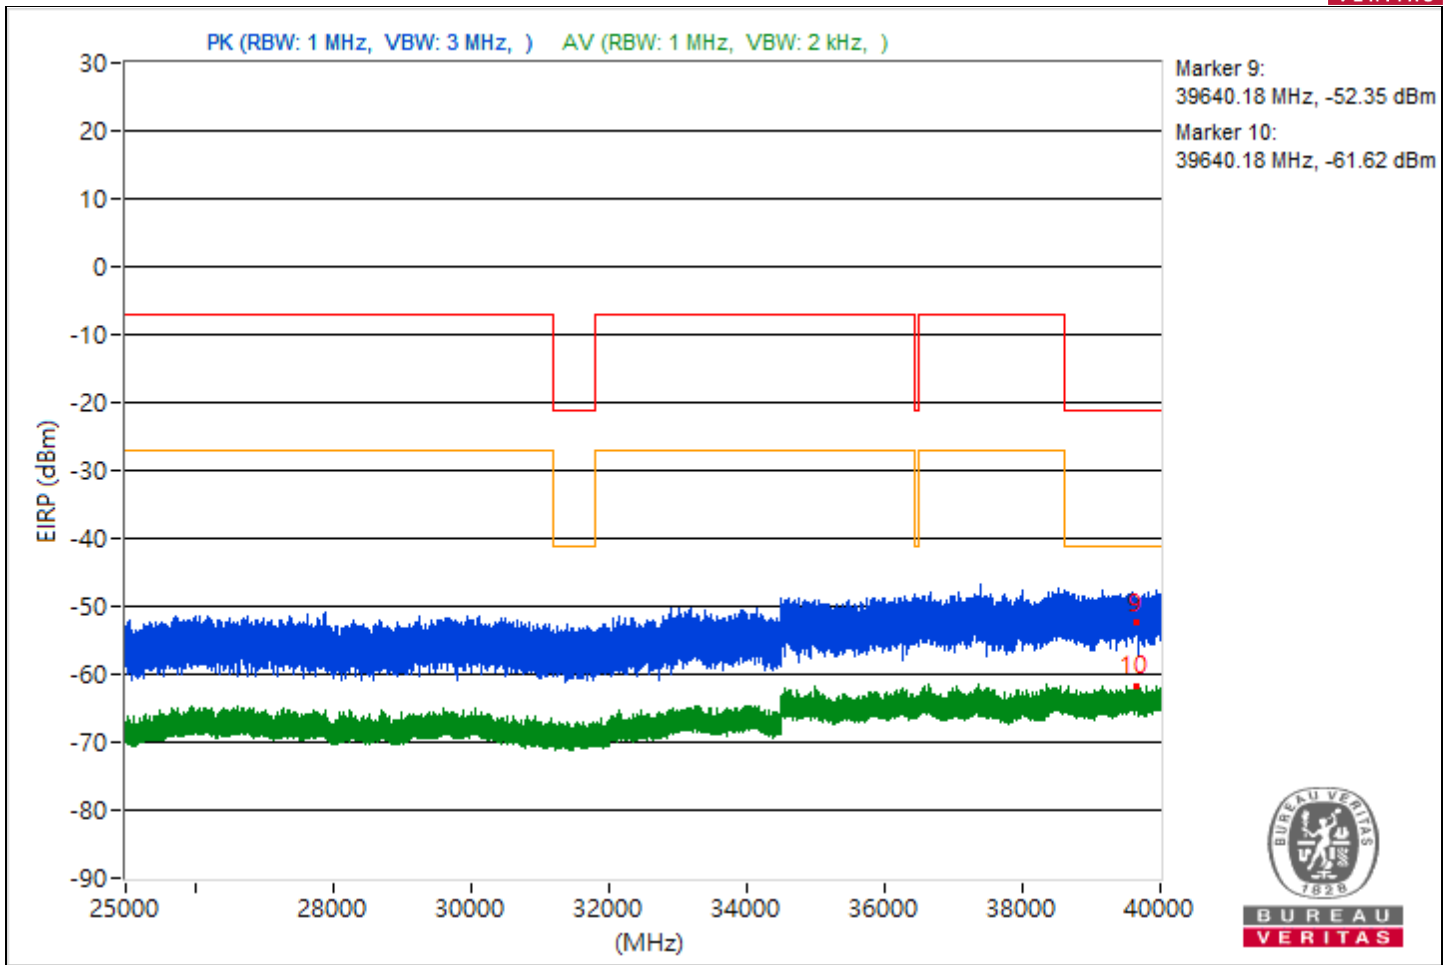


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.89	46.31 PK	74	-27.69	-60.37	-60.3	8.37	-48.95
2	5455.89	39.73 AV	54	-14.27	-67.43	-66.44	8.37	-55.53
3	7250.69	48.31 PK	74	-25.69	-57.24	-59.8	8.37	-46.95
4	7250.69	40.23 AV	54	-13.77	-66.79	-66.05	8.37	-55.03
5	20525.2	47.67 PK	74	-26.33	-57.74	-60.68	8.37	-47.59
6	20525.2	37.76 AV	54	-16.24	-67.39	-71.15	8.37	-57.5
7	23870	49.89 PK	74	-24.11	-55.41	-58.71	8.37	-45.37
8	23870	38.82 AV	54	-15.18	-66.65	-69.43	8.37	-56.44
9	39159.2	44.13 PK	74	-29.87	-62.06	-63.02	8.37	-51.13
10	39159.2	34.36 AV	54	-19.64	-74.84	-70.68	8.37	-60.9

Note: Margin value = Emission Level - Limit value

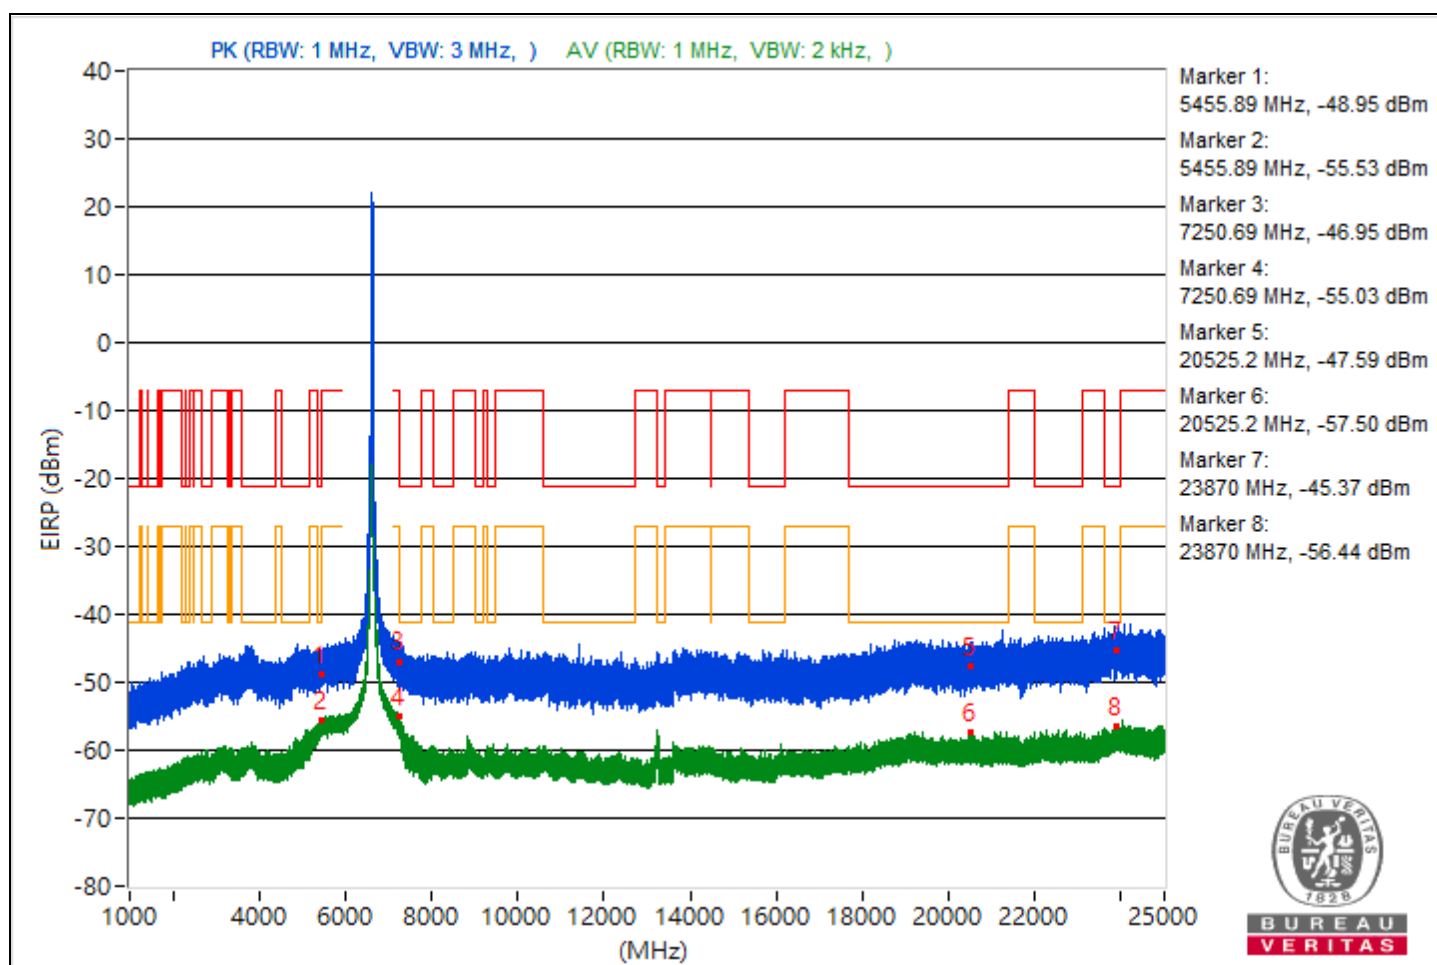


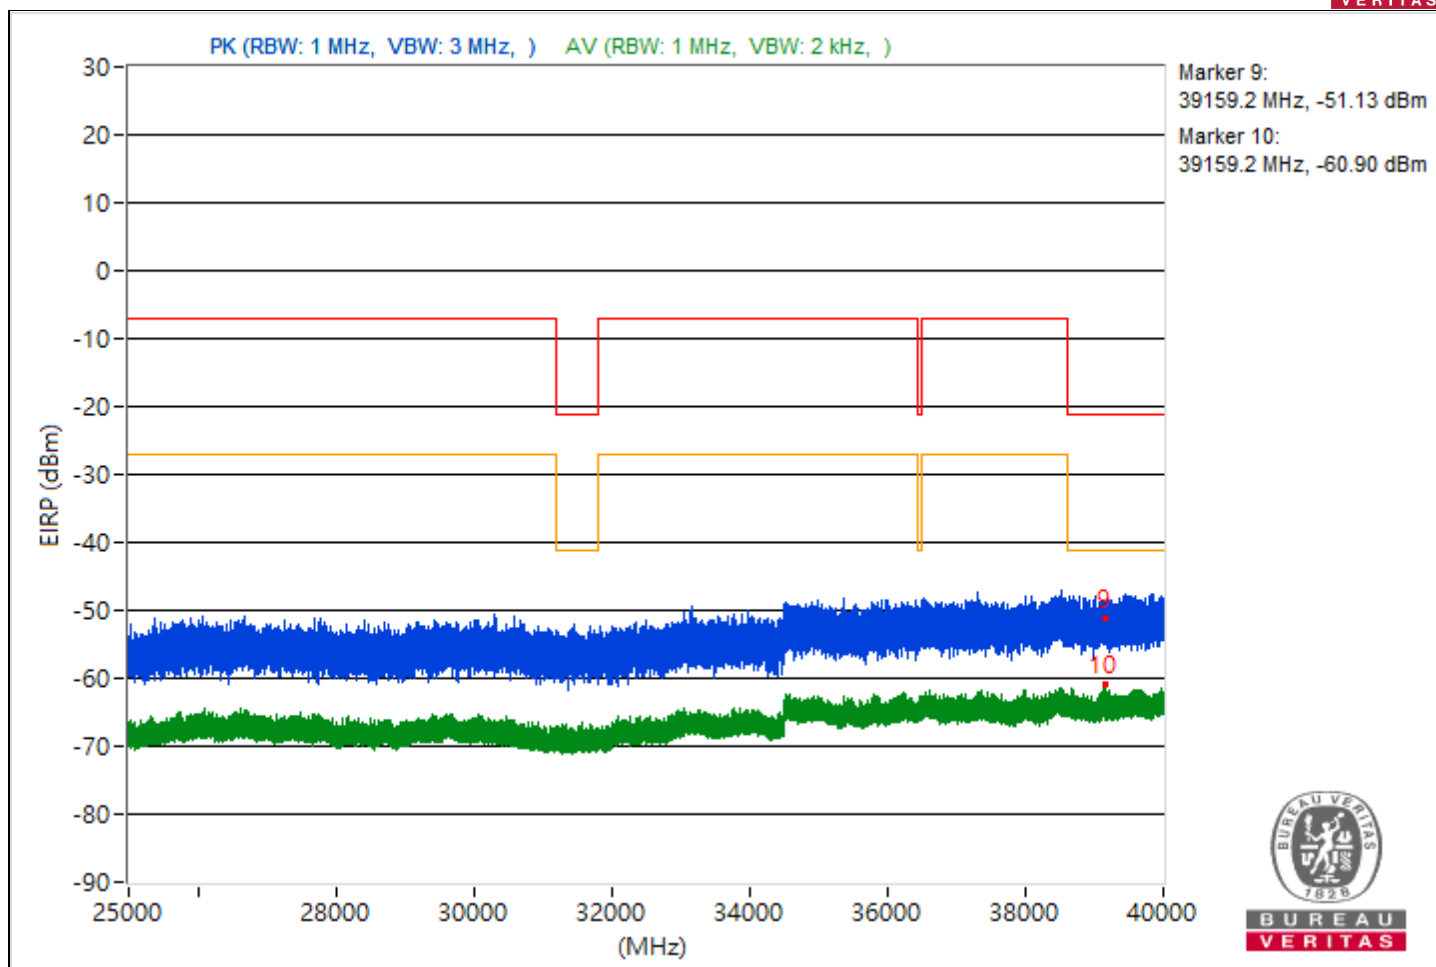


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5433.64	46.34 PK	74	-27.66	-60.78	-59.87	8.37	-48.92
2	5433.64	39.35 AV	54	-14.65	-67.63	-66.98	8.37	-55.91
3	7251.23	48.64 PK	74	-25.36	-57.12	-59.1	8.37	-46.62
4	7251.23	41.01 AV	54	-12.99	-66.04	-65.26	8.37	-54.25
5	19122.8	47.35 PK	74	-26.65	-60.33	-58.45	8.37	-47.91
6	19122.8	37.86 AV	54	-16.14	-67.48	-70.65	8.37	-57.4
7	23997	51.72 PK	74	-22.28	-56.18	-53.95	8.37	-43.54
8	23997	39 AV	54	-15	-69.92	-66.15	8.37	-56.26
9	39944	44.35 PK	74	-29.65	-61.22	-63.73	8.37	-50.91
10	39944	33.74 AV	54	-20.26	-71.32	-75.42	8.37	-61.52

Note: Margin value = Emission Level - Limit value

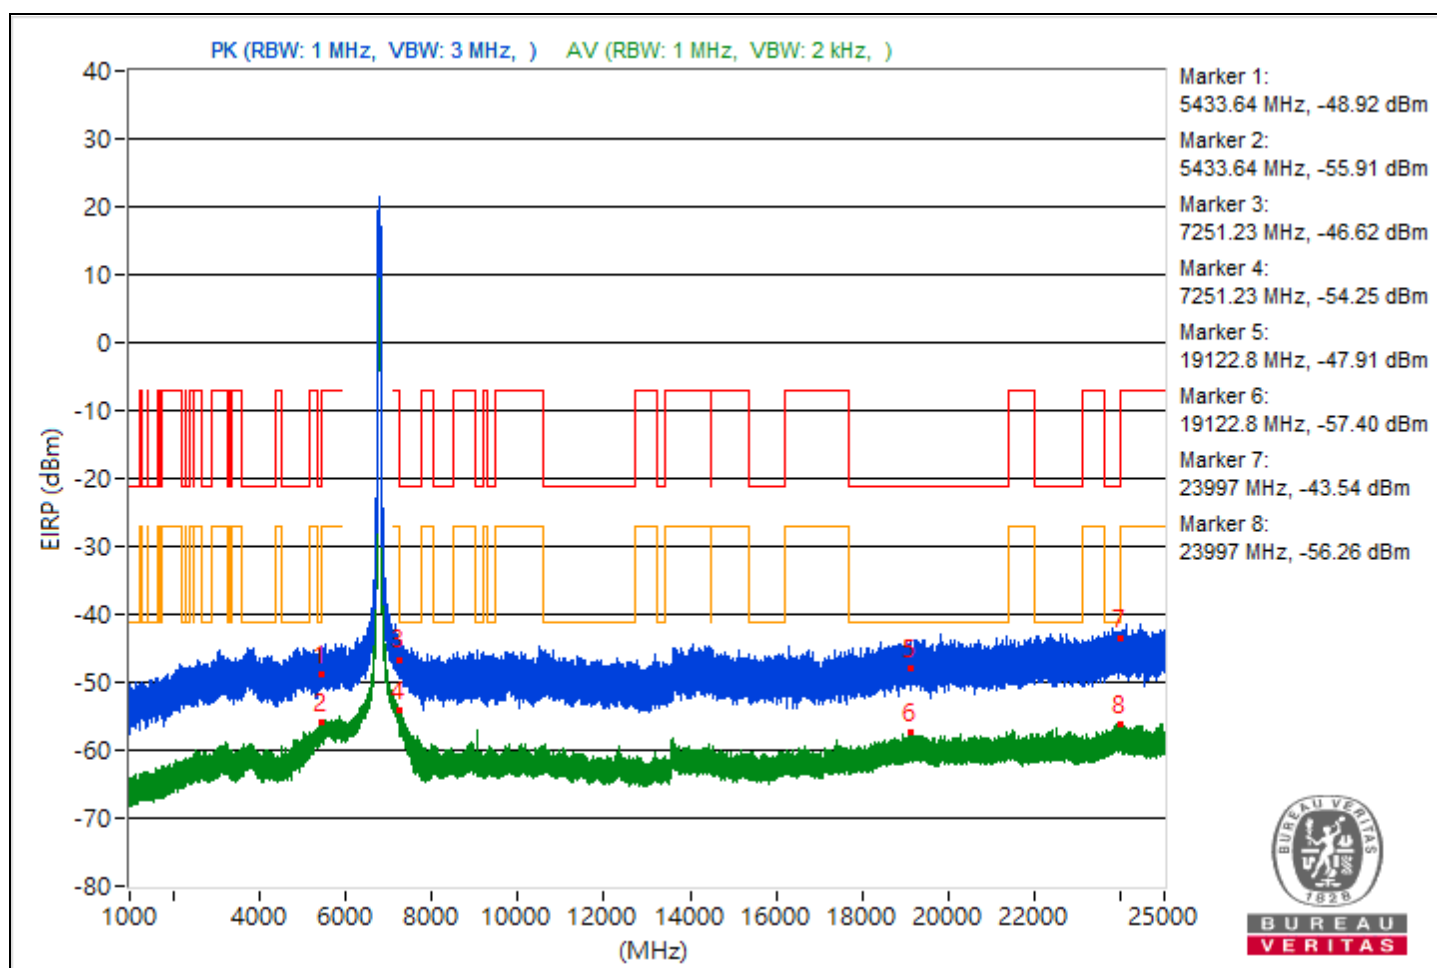

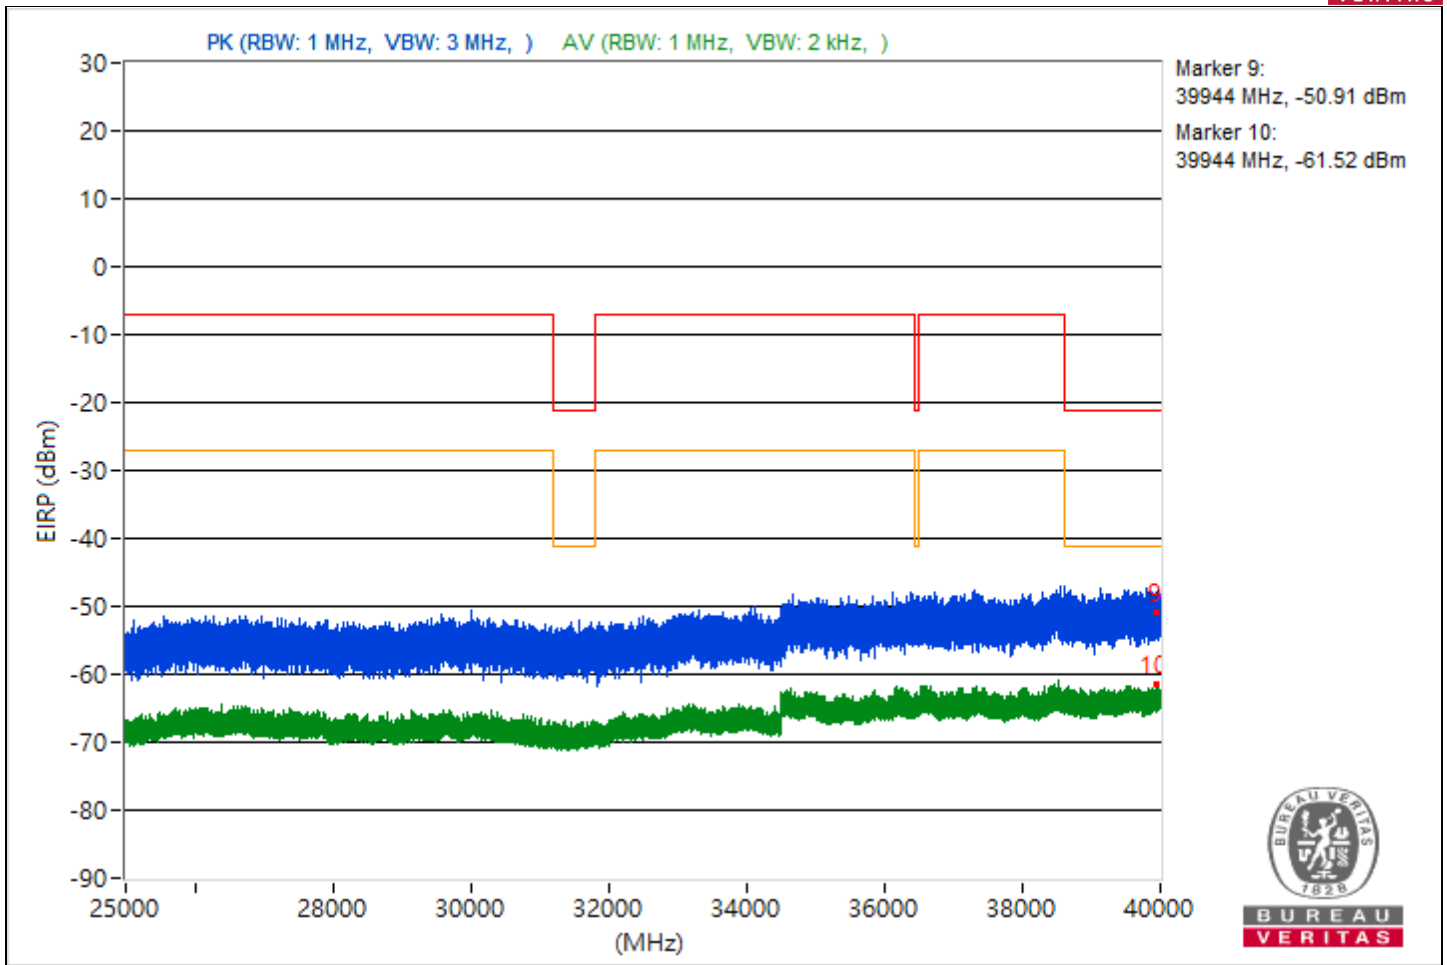


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		


Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5874.57	65.17 PK	88.26	-23.09	-41.16	-41.81	8.37	-30.09
2	#5874.57	55.79 AV	68.26	-12.47	-48.69	-55.33	8.37	-39.47
3	8033.33	52.36 PK	74	-21.64	-52.01	-59.32	8.37	-42.9
4	8033.33	49.85 AV	54	-4.15	-53.97	-67.32	8.37	-45.41
5	19202.2	47.53 PK	74	-26.47	-60.83	-57.88	8.37	-47.73
6	19202.2	37.95 AV	54	-16.05	-67.68	-70.01	8.37	-57.31
7	23741.4	50.2 PK	74	-23.8	-55.9	-57.05	8.37	-45.06
8	23741.4	38.69 AV	54	-15.31	-66.6	-69.91	8.37	-56.57
9	39576.09	41.94 PK	74	-32.06	-64.43	-64.97	8.37	-53.32
10	39576.09	33.73 AV	54	-20.27	-71.28	-75.55	8.37	-61.53

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

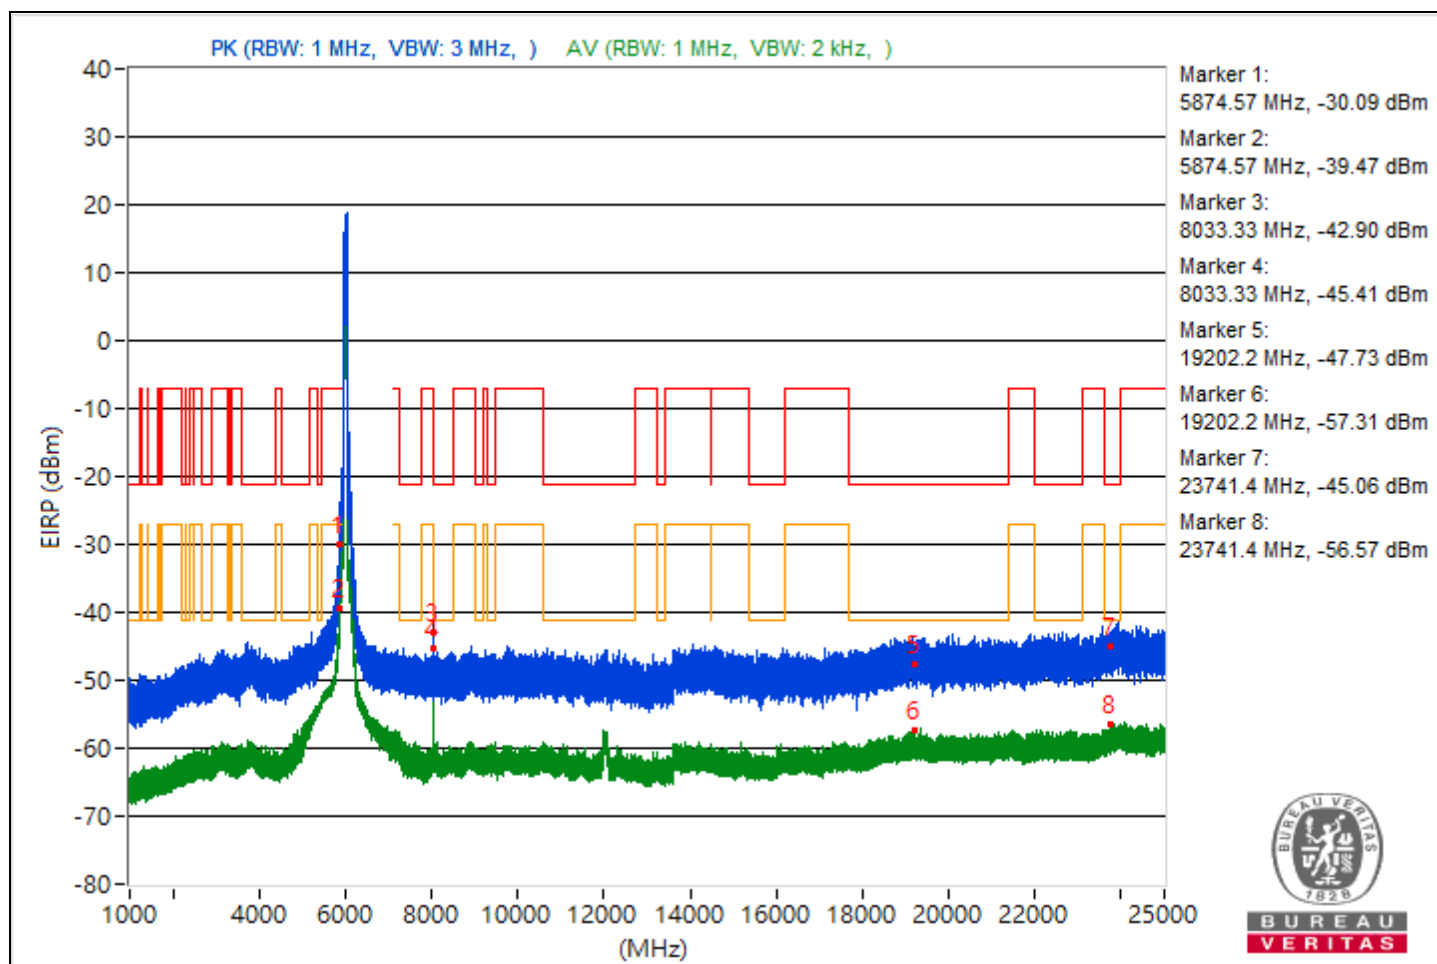


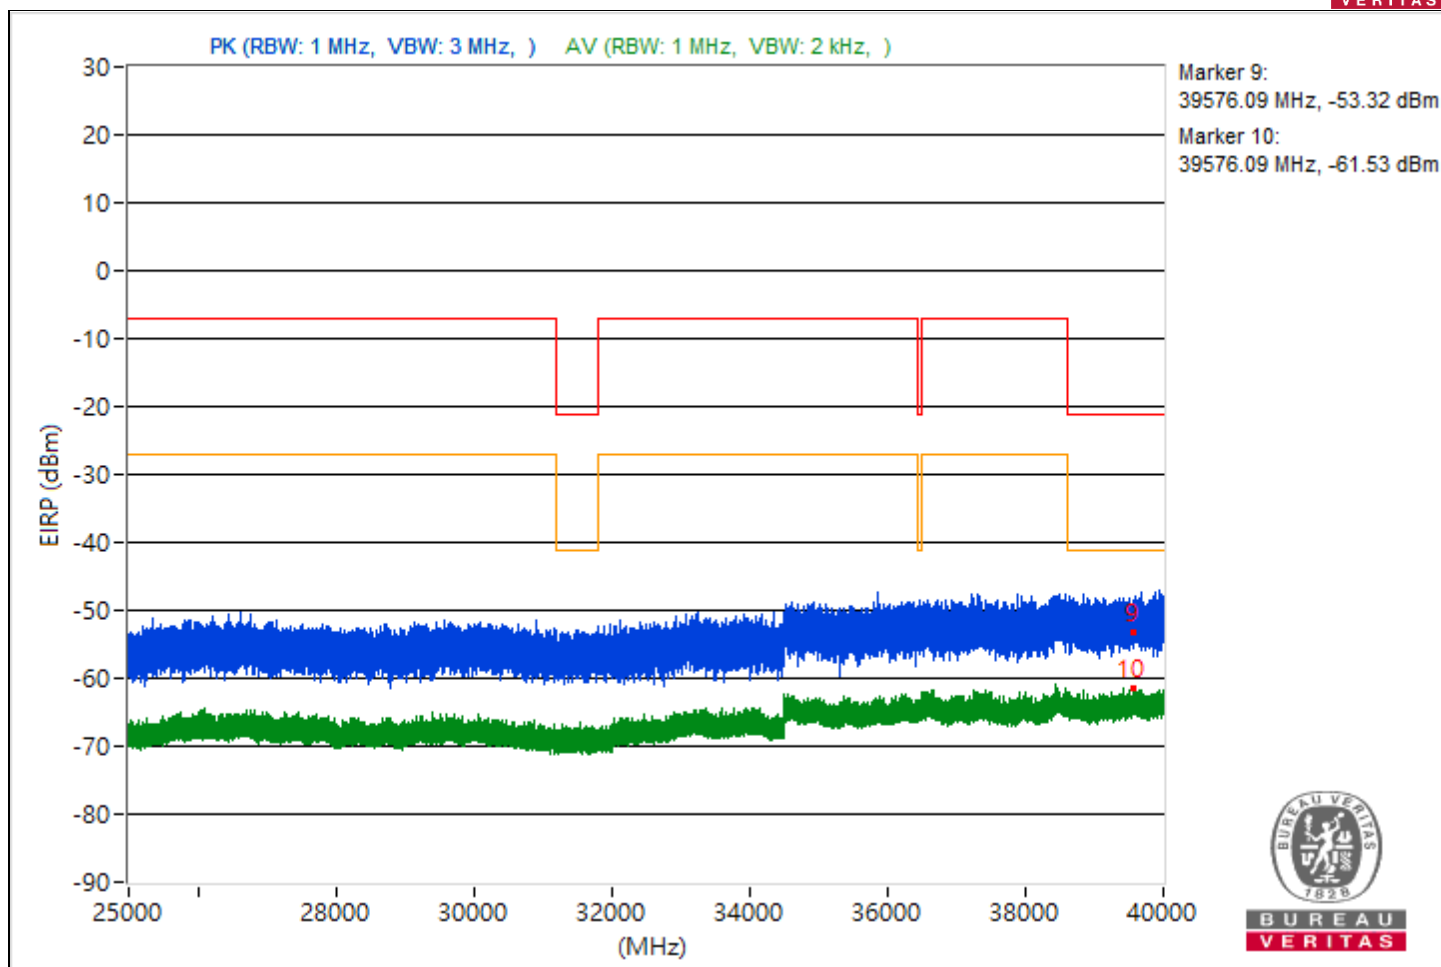


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5431	47.6 PK	74	-26.4	-59.22	-58.87	8.37	-47.66
2	5431	40.65 AV	54	-13.35	-66.74	-65.35	8.37	-54.61
3	8460	49.53 PK	74	-24.47	-55.6	-59.45	8.37	-45.73
4	8460	42.29 AV	54	-11.71	-62.11	-69.25	8.37	-52.97
5	19201.5	48.38 PK	74	-25.62	-59.47	-57.32	8.37	-46.88
6	19201.5	38.03 AV	54	-15.97	-70.71	-67.2	8.37	-57.23
7	23821.4	47.34 PK	74	-26.66	-60.4	-58.42	8.37	-47.92
8	23821.4	38.58 AV	54	-15.42	-66.55	-70.39	8.37	-56.68
9	39956.89	44.08 PK	74	-29.92	-63.58	-61.73	8.37	-51.18
10	39956.89	34.18 AV	54	-19.82	-70.75	-75.34	8.37	-61.08

Note: Margin value = Emission Level - Limit value

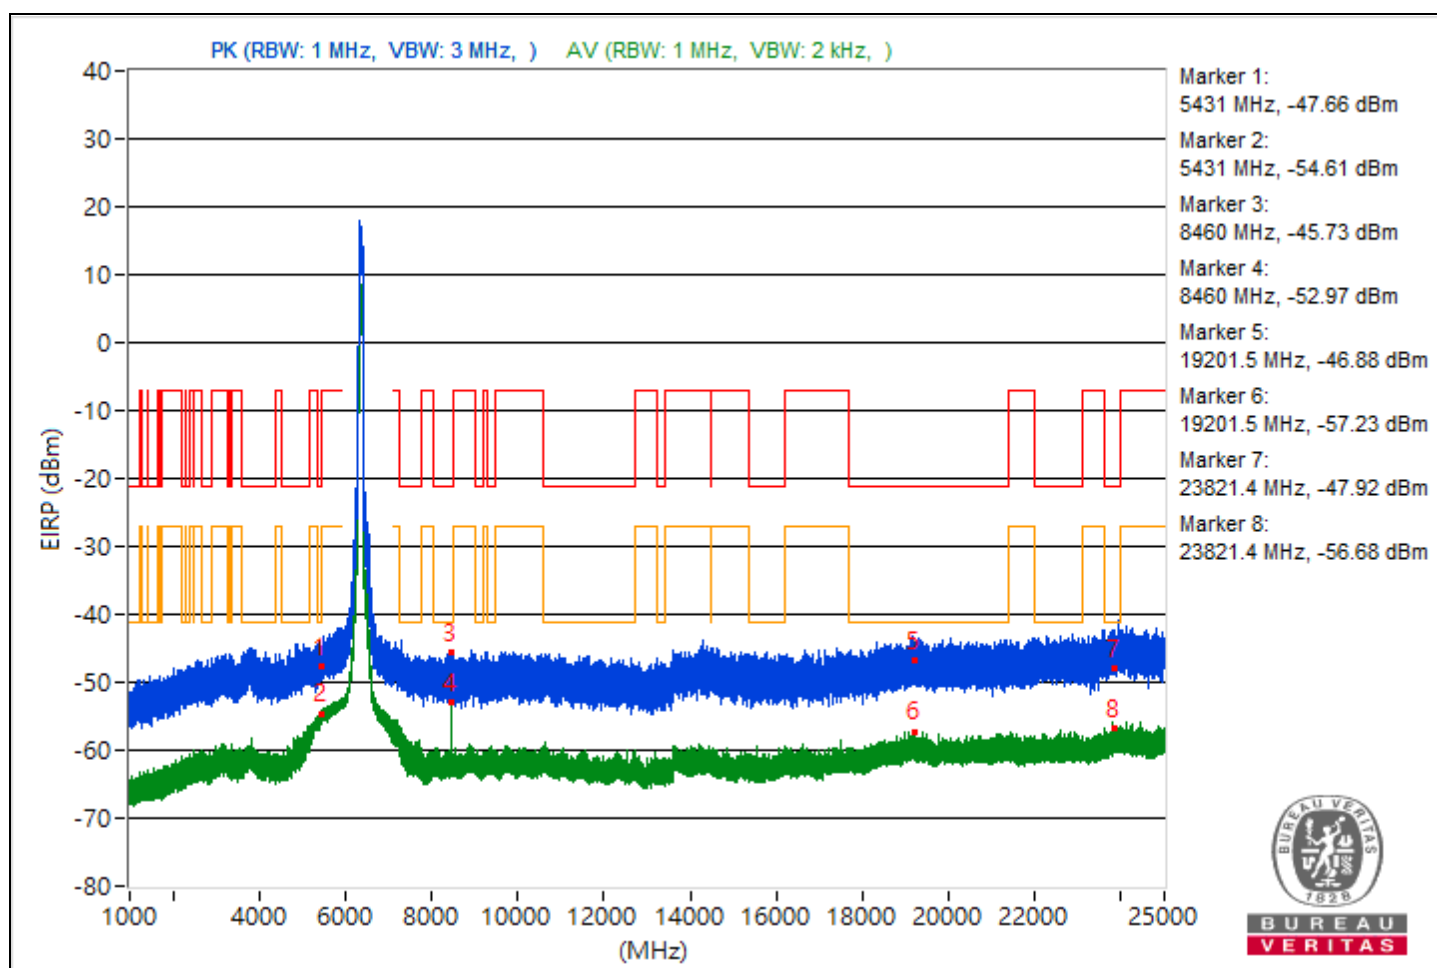


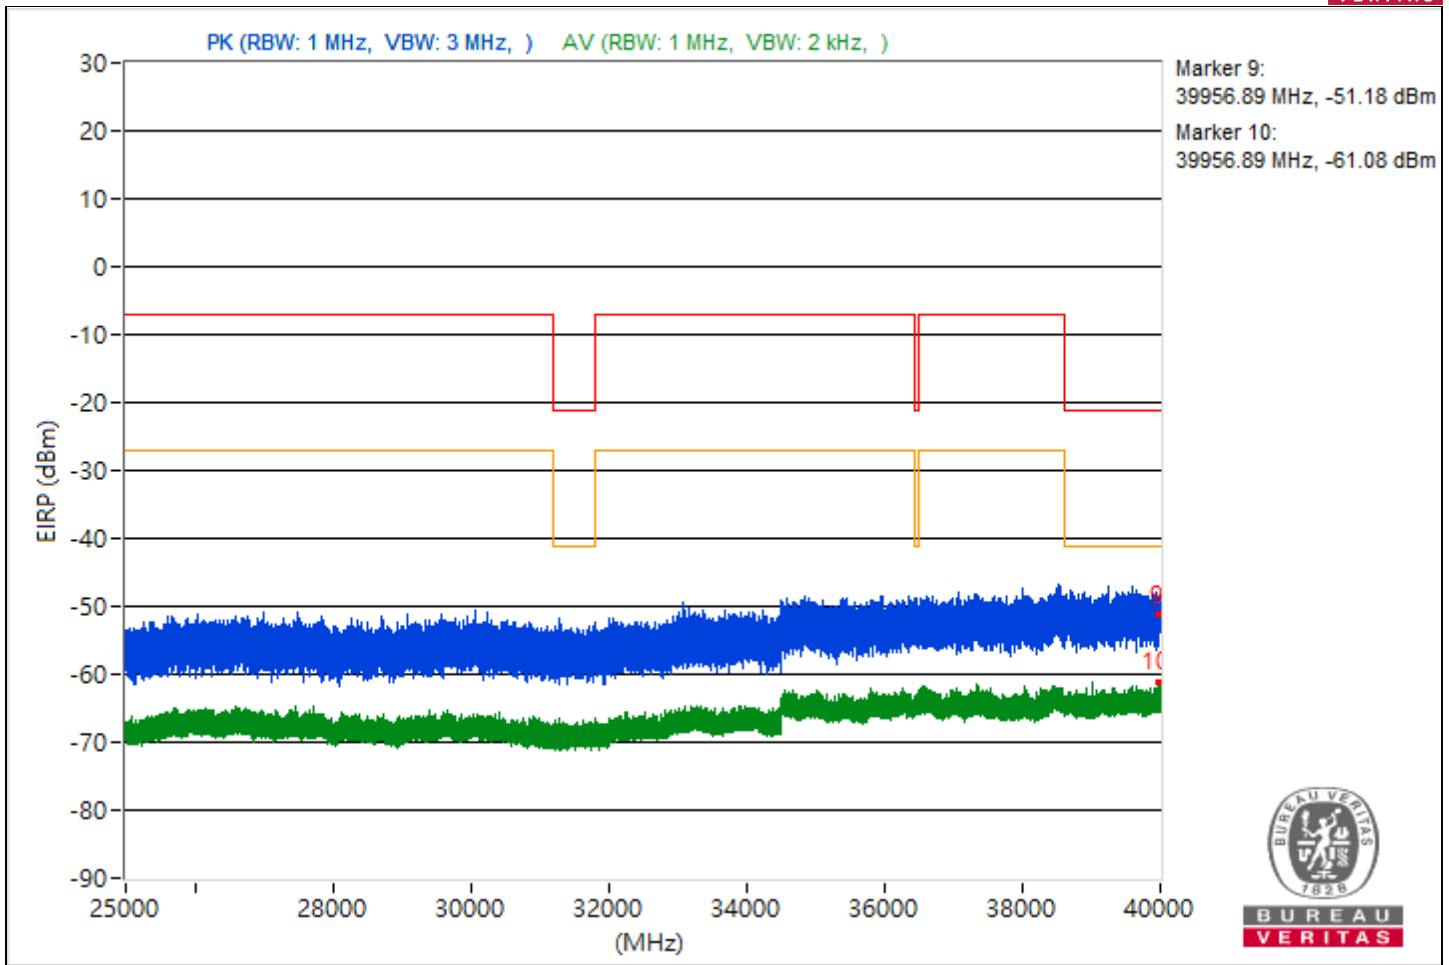


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.43	47.92 PK	74	-26.08	-60.85	-57.3	8.37	-47.34
2	5449.43	39.26 AV	54	-14.74	-68.56	-66.45	8.37	-56
3	7257.84	48.72 PK	74	-25.28	-58.87	-57.14	8.37	-46.54
4	7257.84	39.61 AV	54	-14.39	-66.34	-67.85	8.37	-55.65
5	20927.3	48.51 PK	74	-25.49	-57.27	-59.21	8.37	-46.75
6	20927.3	37.6 AV	54	-16.4	-70.21	-68.12	8.37	-57.66
7	23860.5	48.64 PK	74	-25.36	-58.36	-57.67	8.37	-46.62
8	23860.5	38.83 AV	54	-15.17	-69.06	-66.84	8.37	-56.43
9	39678.04	44.62 PK	74	-29.38	-61.9	-62.15	8.37	-50.64
10	39678.04	33.42 AV	54	-20.58	-71.42	-76.36	8.37	-61.84

Note: Margin value = Emission Level - Limit value

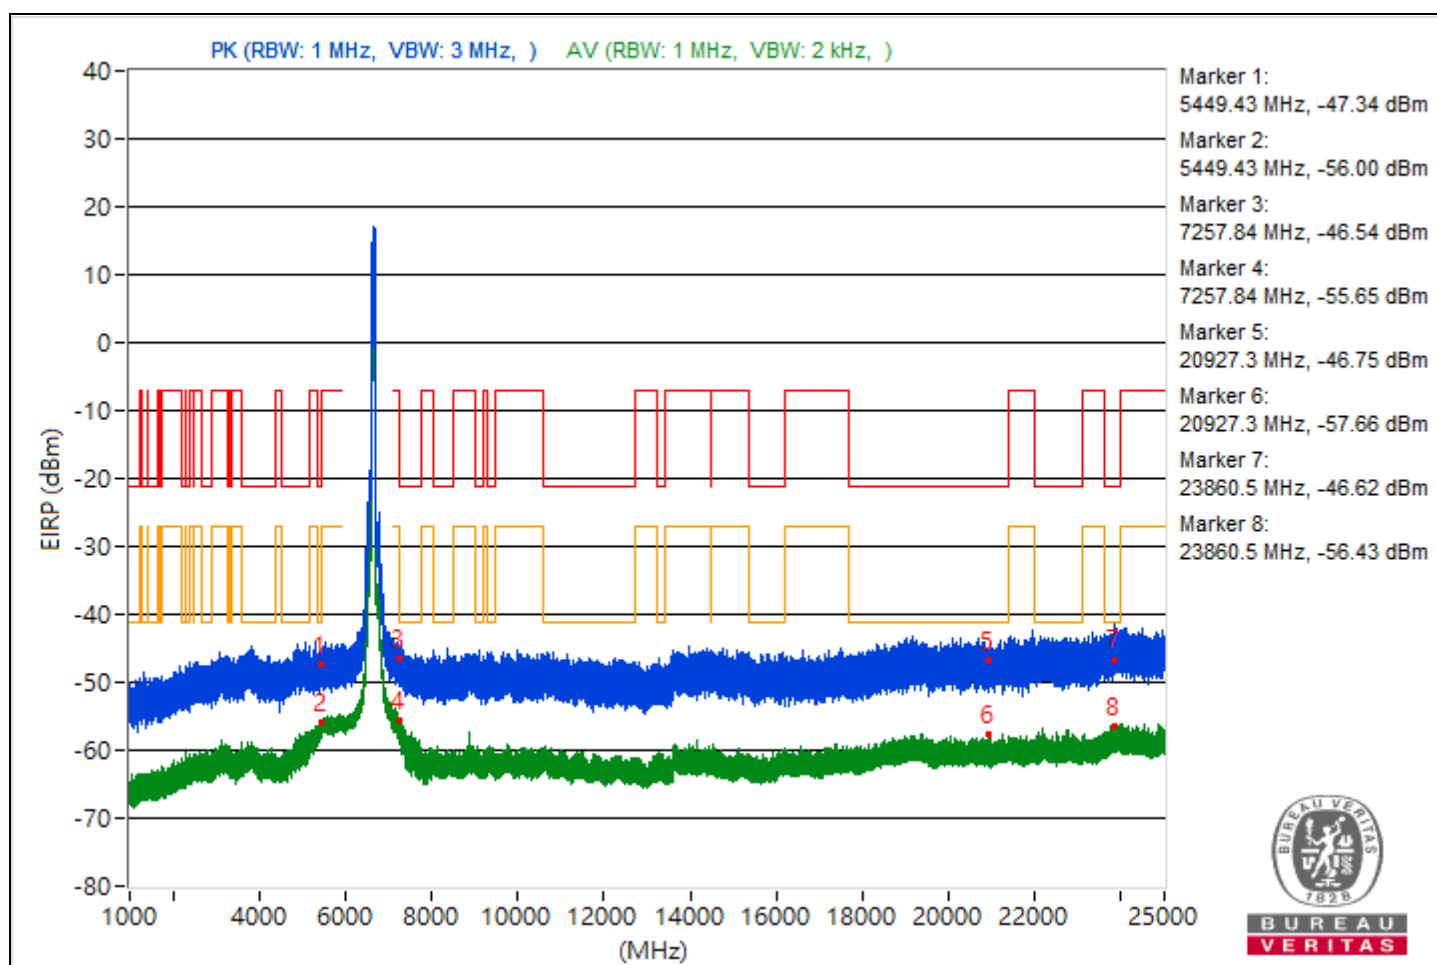

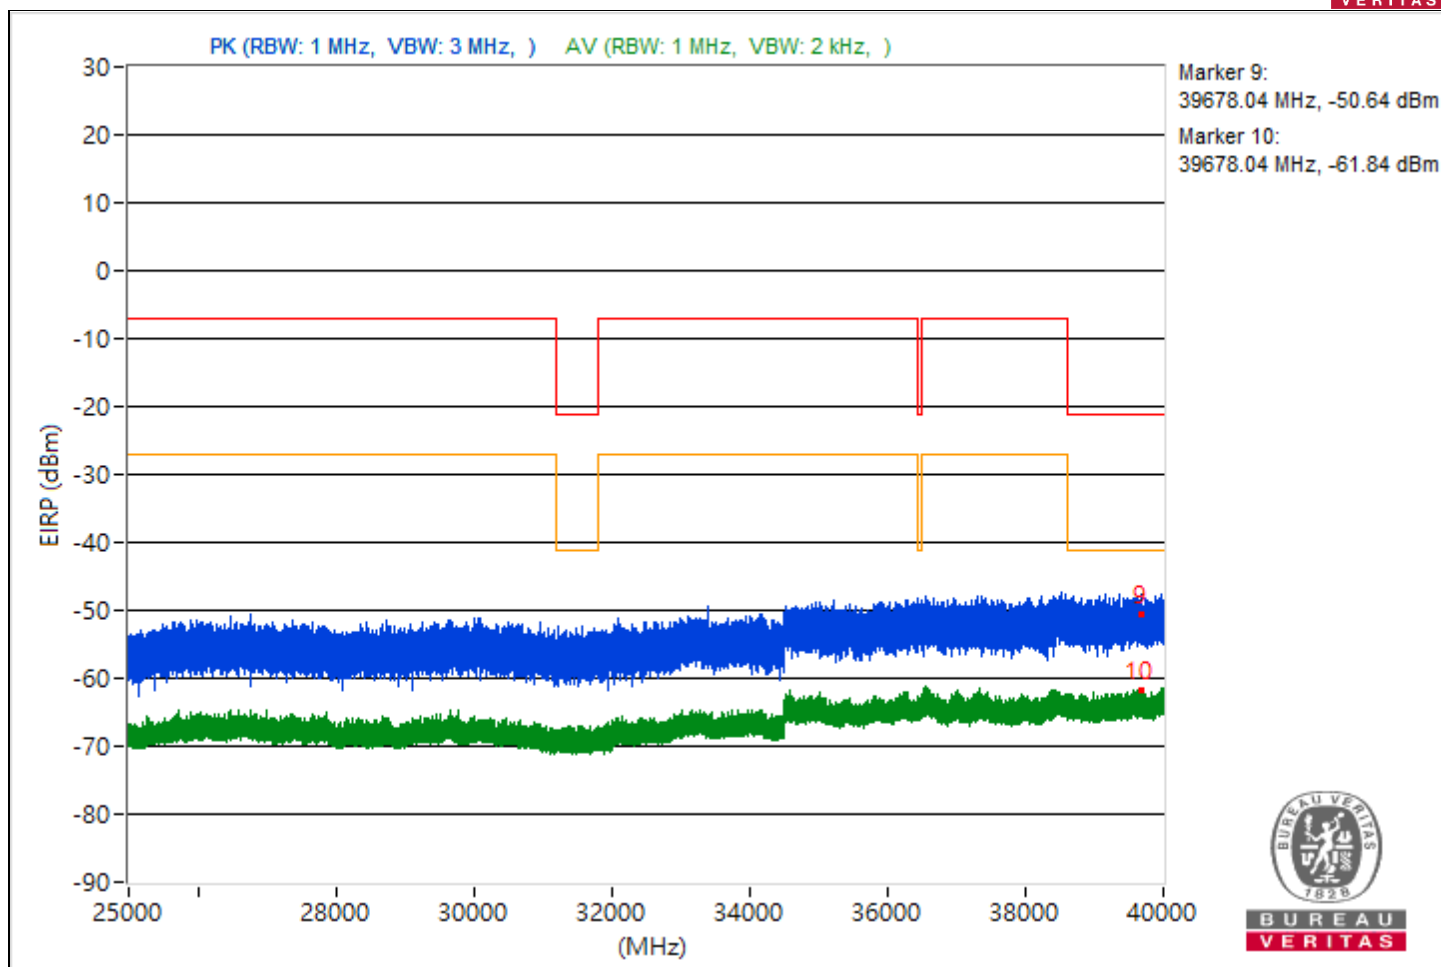



RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5874.88	64.99 PK	88.26	-23.27	-40.39	-43.43	8.37	-30.27
2	#5874.88	58.89 AV	68.26	-9.37	-46.7	-49.13	8.37	-36.37
3	8033.42	52.12 PK	74	-21.88	-52.15	-60.17	8.37	-43.14
4	8033.42	50.37 AV	54	-3.63	-53.38	-68.8	8.37	-44.89
5	19762.2	46.93 PK	74	-27.07	-60.15	-59.3	8.37	-48.33
6	19762.2	37.66 AV	54	-16.34	-70.96	-67.62	8.37	-57.6
7	23993.4	49.44 PK	74	-24.56	-56.91	-57.51	8.37	-45.82
8	23993.4	38.77 AV	54	-15.23	-66.33	-70.29	8.37	-56.49
9	39707.29	43.58 PK	74	-30.42	-61.93	-64.58	8.37	-51.68
10	39707.29	34.09 AV	54	-19.91	-74.82	-71.06	8.37	-61.17

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

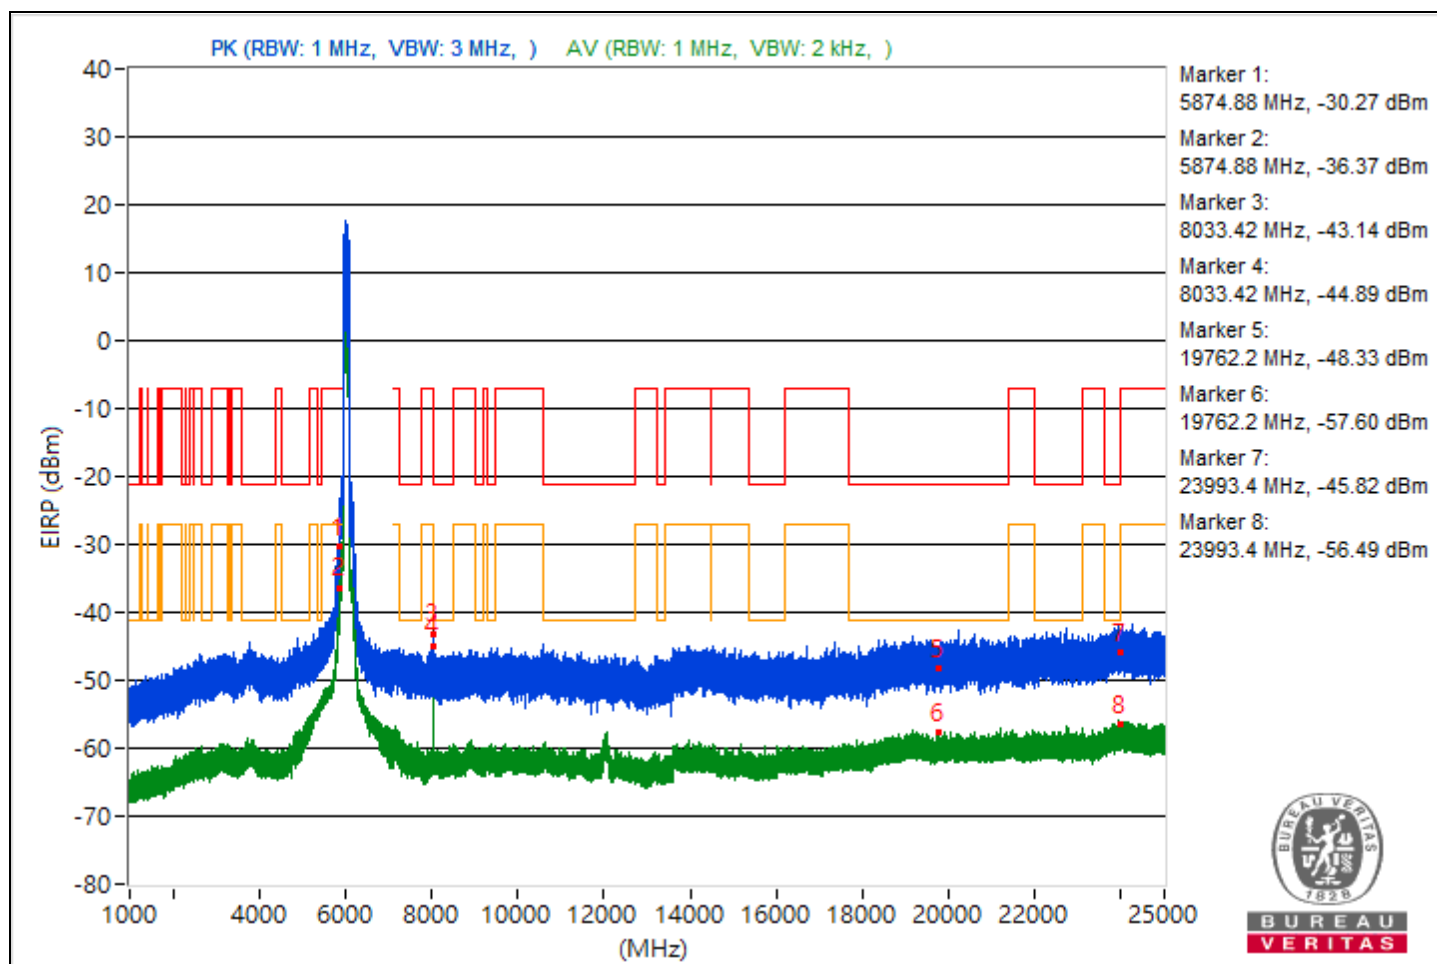


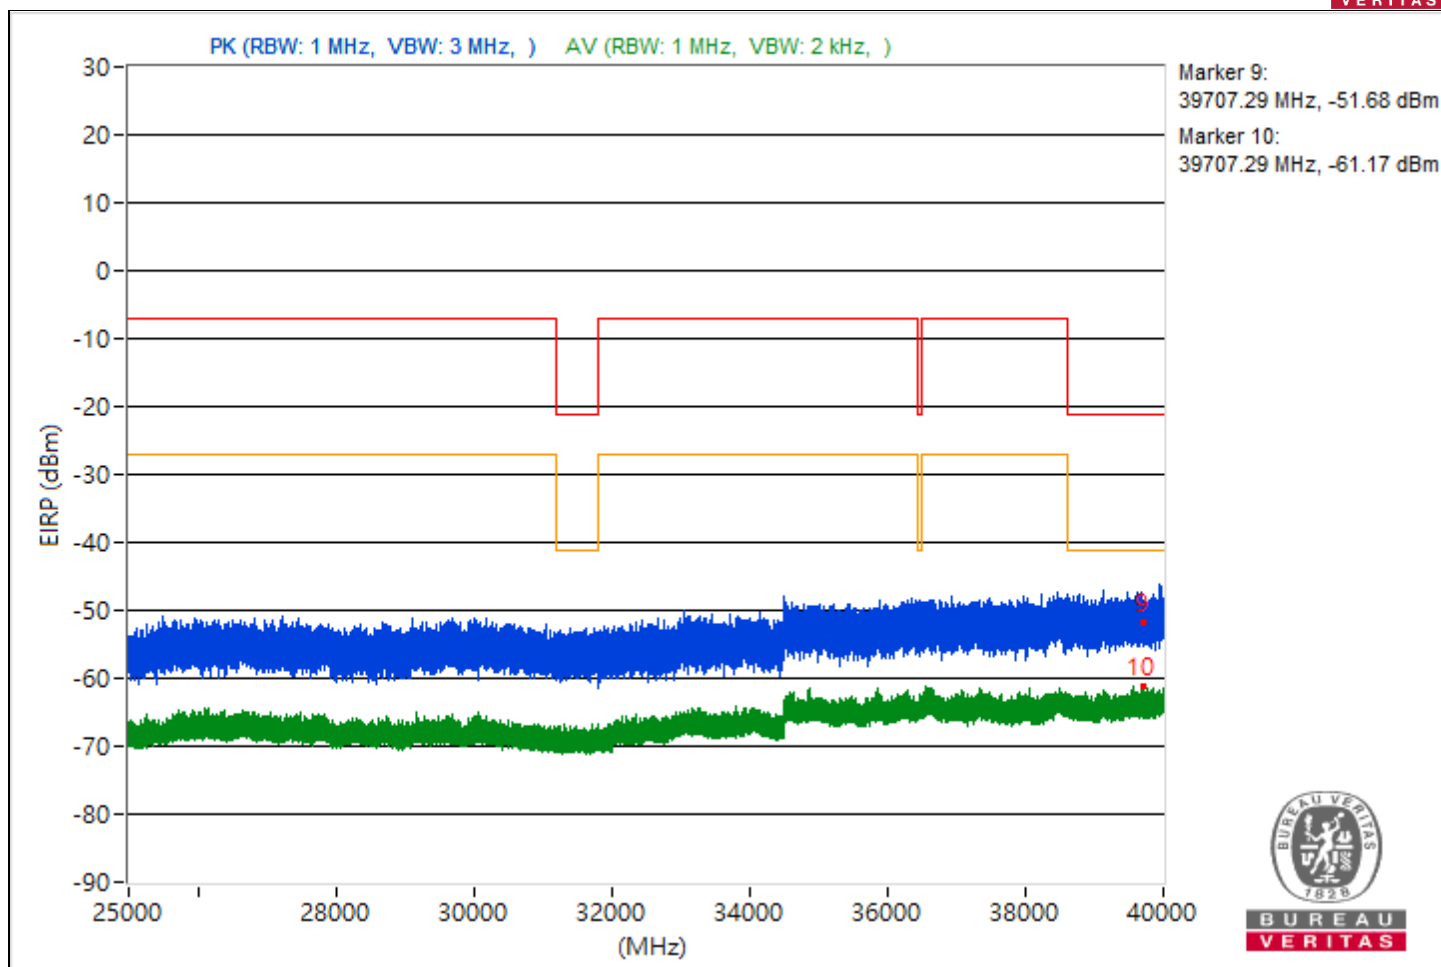


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.46	49.36 PK	74	-24.64	-56.54	-58.18	8.37	-45.9
2	5458.46	40.83 AV	54	-13.17	-66.49	-65.22	8.37	-54.43
3	8460.09	49.34 PK	74	-24.66	-55.26	-61.31	8.37	-45.92
4	8460.09	44.46 AV	54	-9.54	-59.63	-69.12	8.37	-50.8
5	19320.9	49.27 PK	74	-24.73	-57.63	-57.12	8.37	-45.99
6	19320.9	37.27 AV	54	-16.73	-67.64	-72.28	8.37	-57.99
7	23836.1	48.44 PK	74	-25.56	-59.02	-57.51	8.37	-46.82
8	23836.1	38.59 AV	54	-15.41	-66.45	-70.6	8.37	-56.67
9	39194.13	43.2 PK	74	-30.8	-64.09	-62.87	8.37	-52.06
10	39194.13	33.59 AV	54	-20.41	-76.31	-71.21	8.37	-61.67

Note: Margin value = Emission Level - Limit value

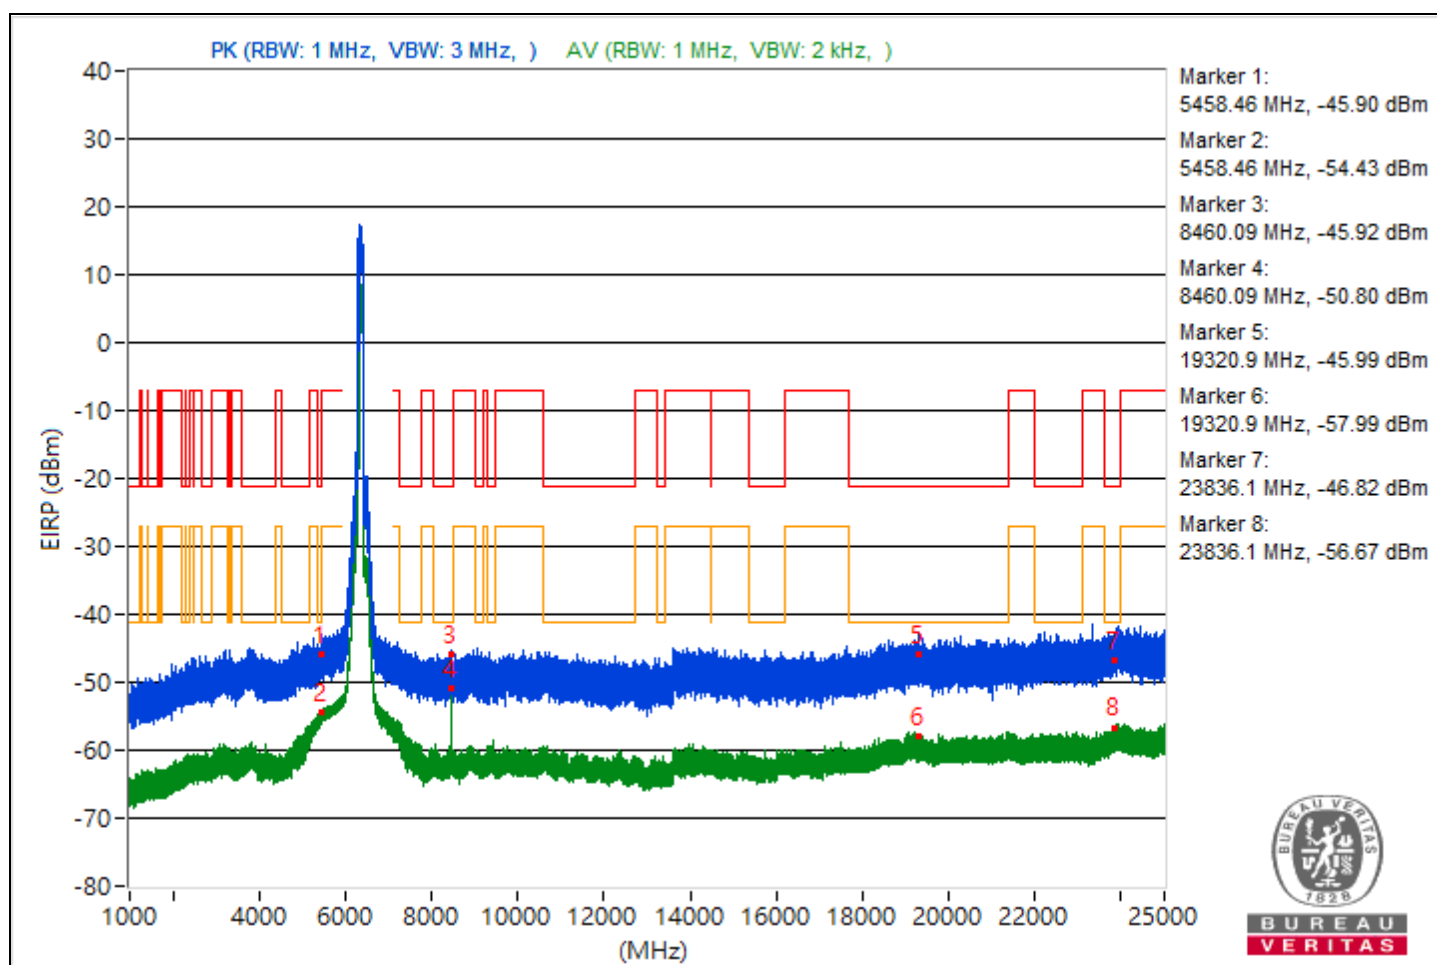


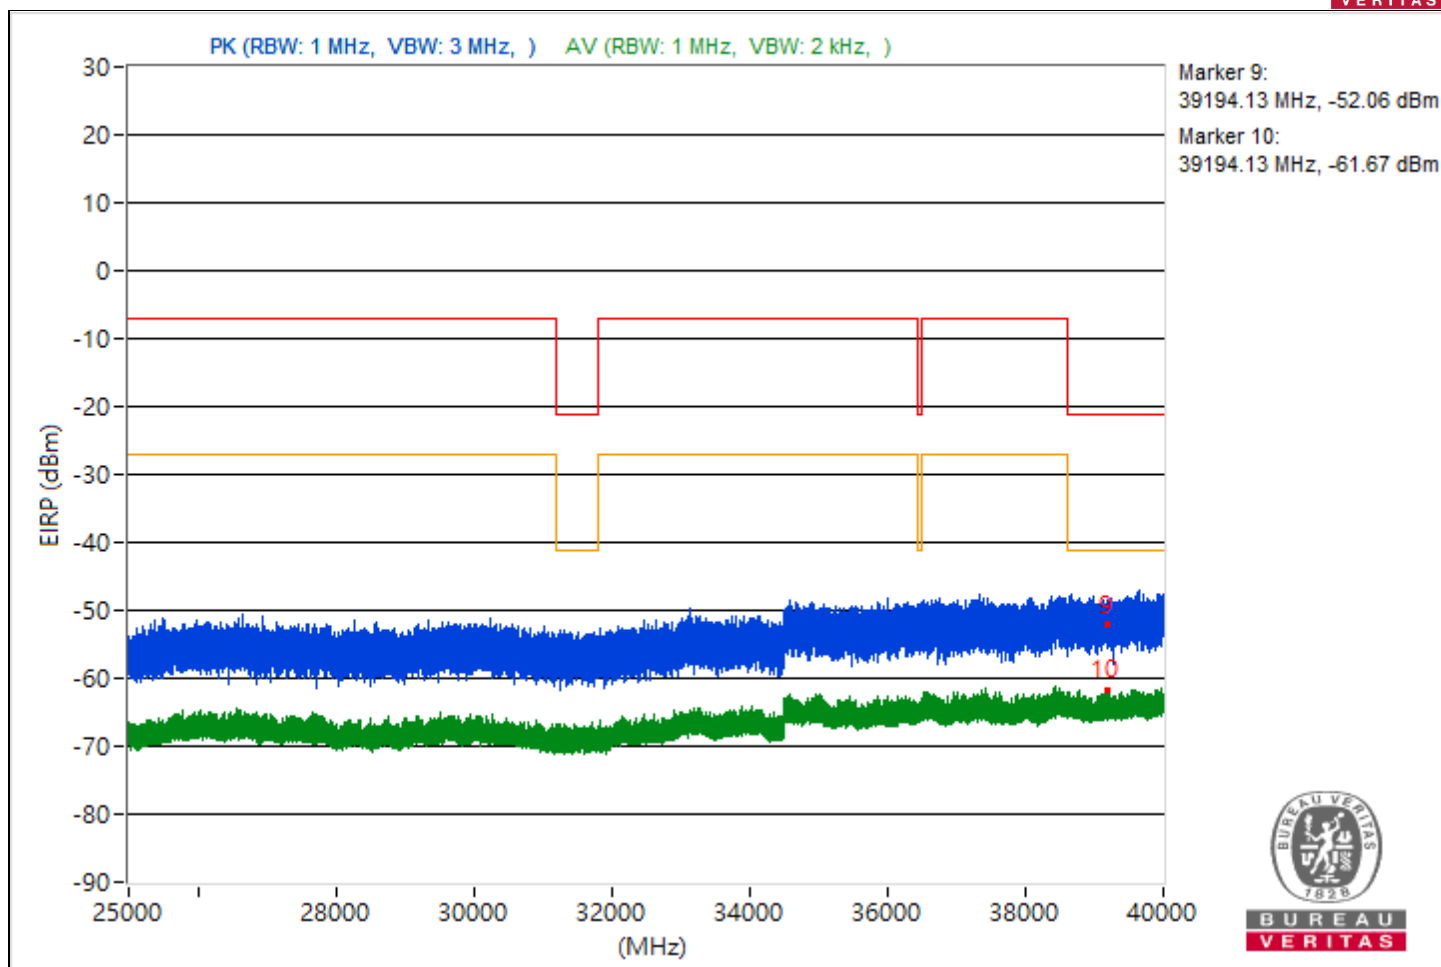


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5434.03	46.4 PK	74	-27.6	-60.36	-60.11	8.37	-48.86
2	5434.03	39.57 AV	54	-14.43	-67.48	-66.7	8.37	-55.69
3	7253.57	48.19 PK	74	-25.81	-58.59	-58.32	8.37	-47.07
4	7253.57	39.69 AV	54	-14.31	-67.38	-66.55	8.37	-55.57
5	19449.2	47.92 PK	74	-26.08	-57.83	-59.82	8.37	-47.34
6	19449.2	37.37 AV	54	-16.63	-67.53	-72.23	8.37	-57.89
7	23825.5	50.19 PK	74	-23.81	-56.35	-56.56	8.37	-45.07
8	23825.5	39.13 AV	54	-14.87	-65.44	-71.63	8.37	-56.13
9	39598.84	42.74 PK	74	-31.26	-64.33	-63.5	8.37	-52.52
10	39598.84	33.52 AV	54	-20.48	-71.55	-75.58	8.37	-61.74

Note: Margin value = Emission Level - Limit value

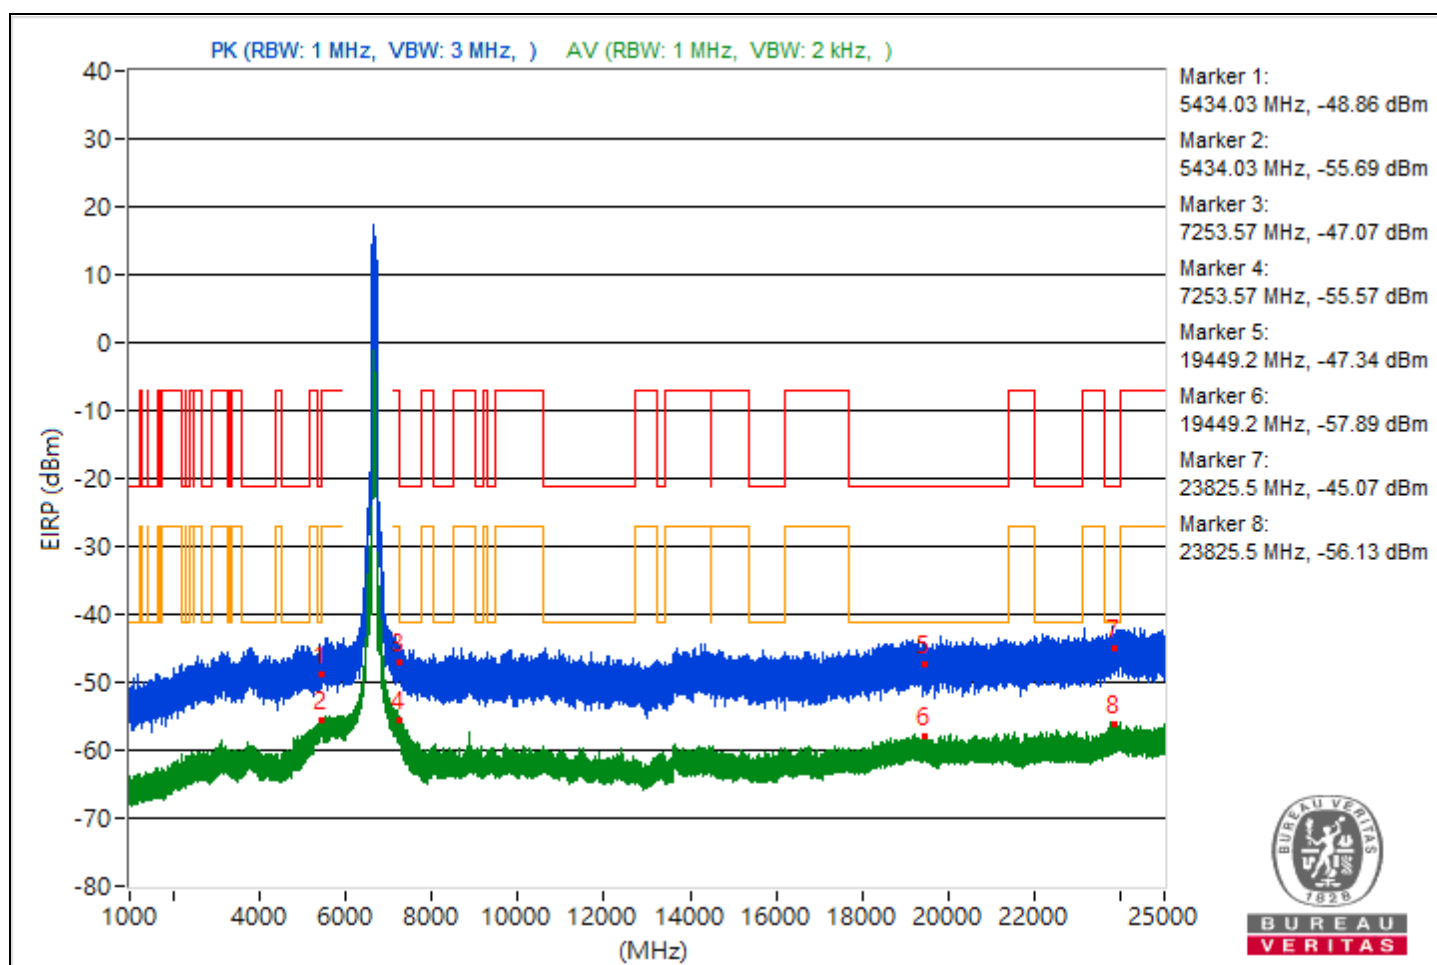

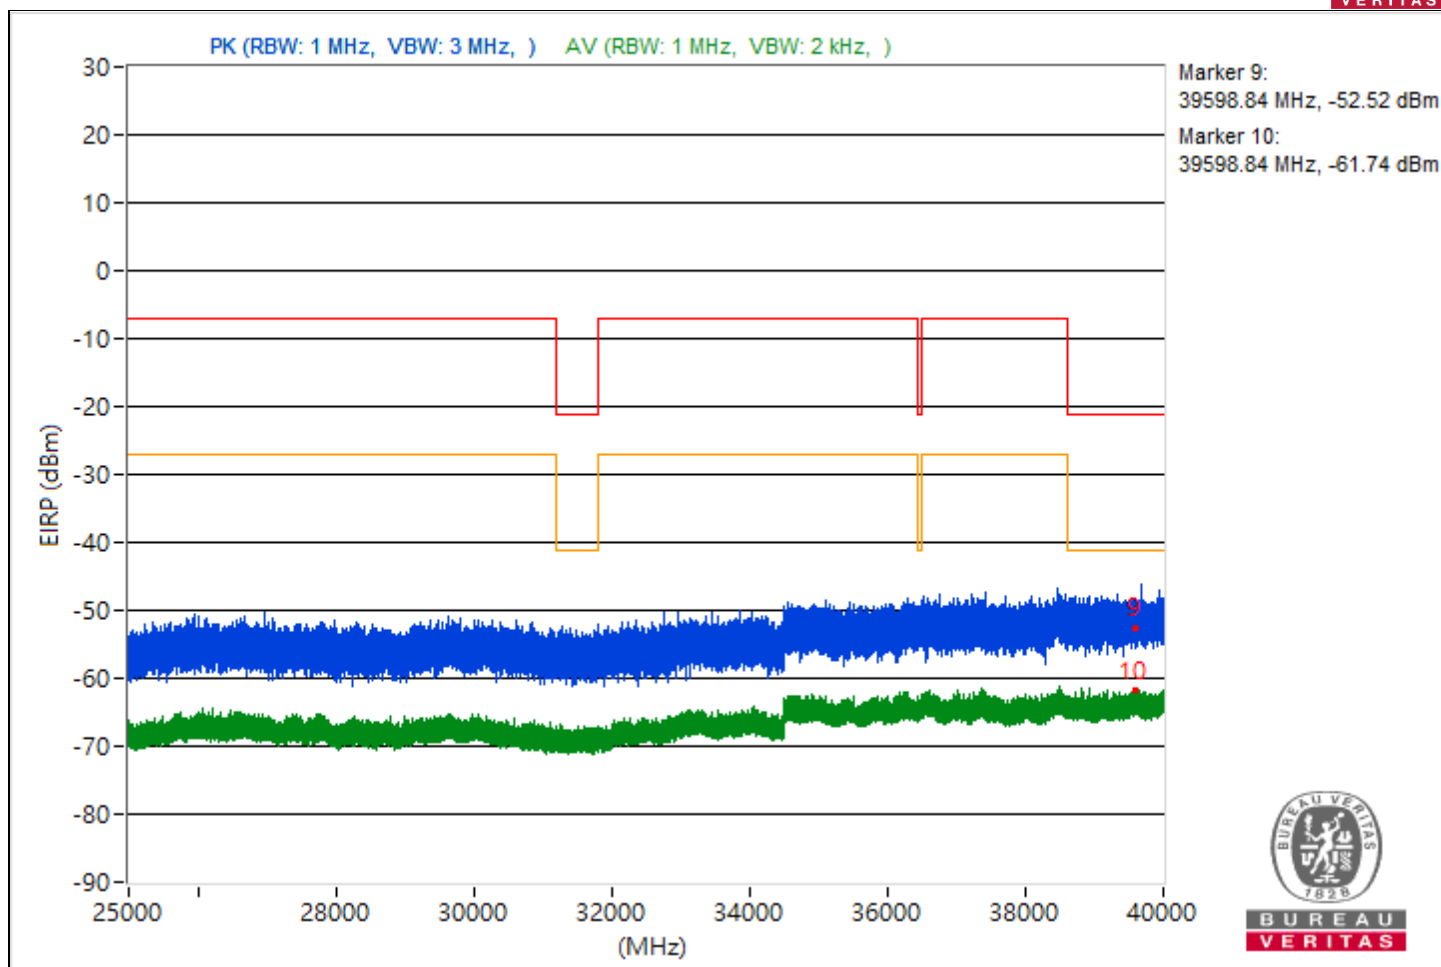

Conducted Band Edges


2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5955.95	118.06 PK			7.84	8.92	11.38	22.8
2	*5955.95	110.94 AV			1.31	1.27	11.38	15.68
3	#5924.7	70.84 PK	88.26	-17.42	-40.2	-37.76	11.38	-24.42
4	#5924.7	58.93 AV	68.26	-9.33	-50.54	-50.92	11.38	-36.33

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

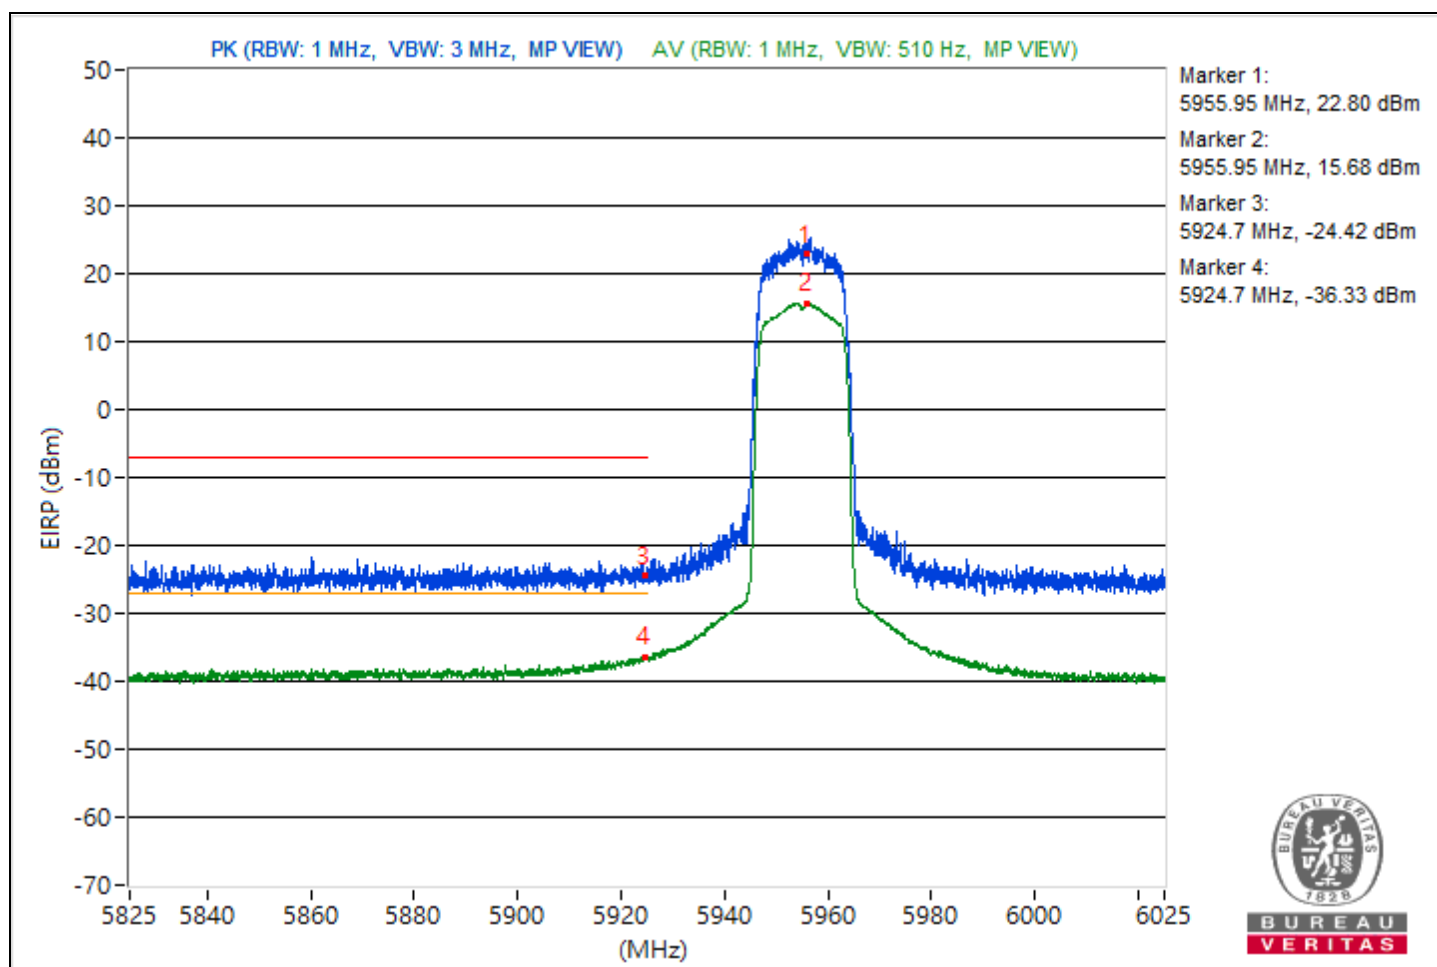


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6853.82	117.72 PK			8.26	7.88	11.38	22.46
2	*6853.82	110.76 AV			1.17	1.05	11.38	15.5
3	#7181.36	70.39 PK	88.26	-17.87	-39.62	-38.93	11.38	-24.87
4	#7181.36	57.86 AV	68.26	-10.4	-52.76	-51	11.38	-37.4

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

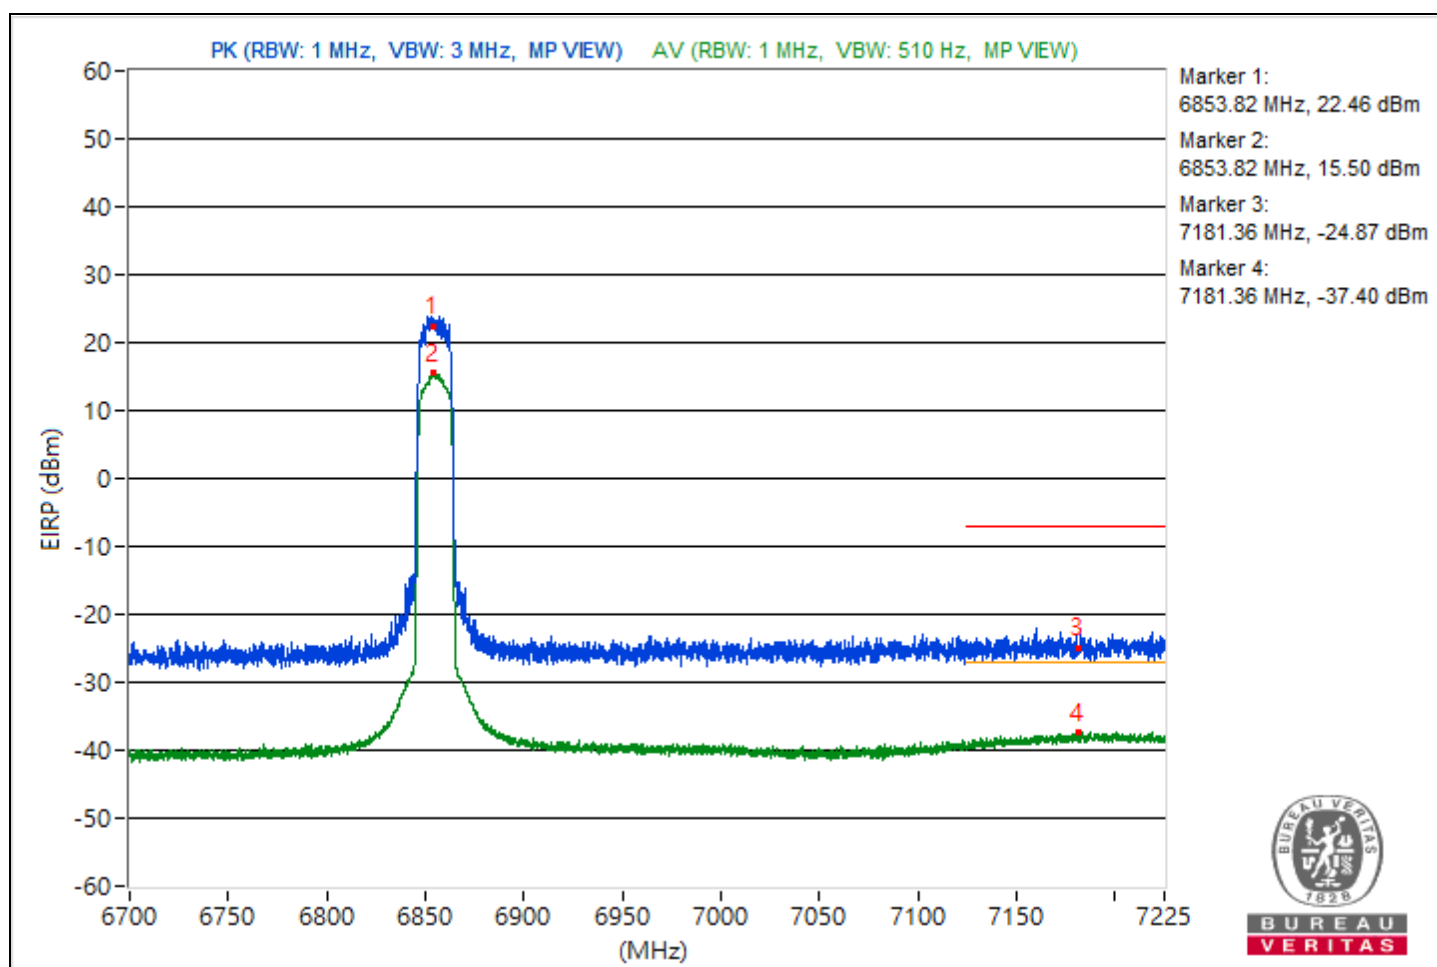


2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5955.82	119.17 PK			11.71	13.22	8.37	23.91
2	*5955.82	110.74 AV			4.28	3.91	8.37	15.48
3	#5924.52	68.62 PK	88.26	-19.64	-37.69	-38.38	8.37	-26.64
4	#5924.52	60.43 AV	68.26	-7.83	-46.05	-46.36	8.37	-34.83

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

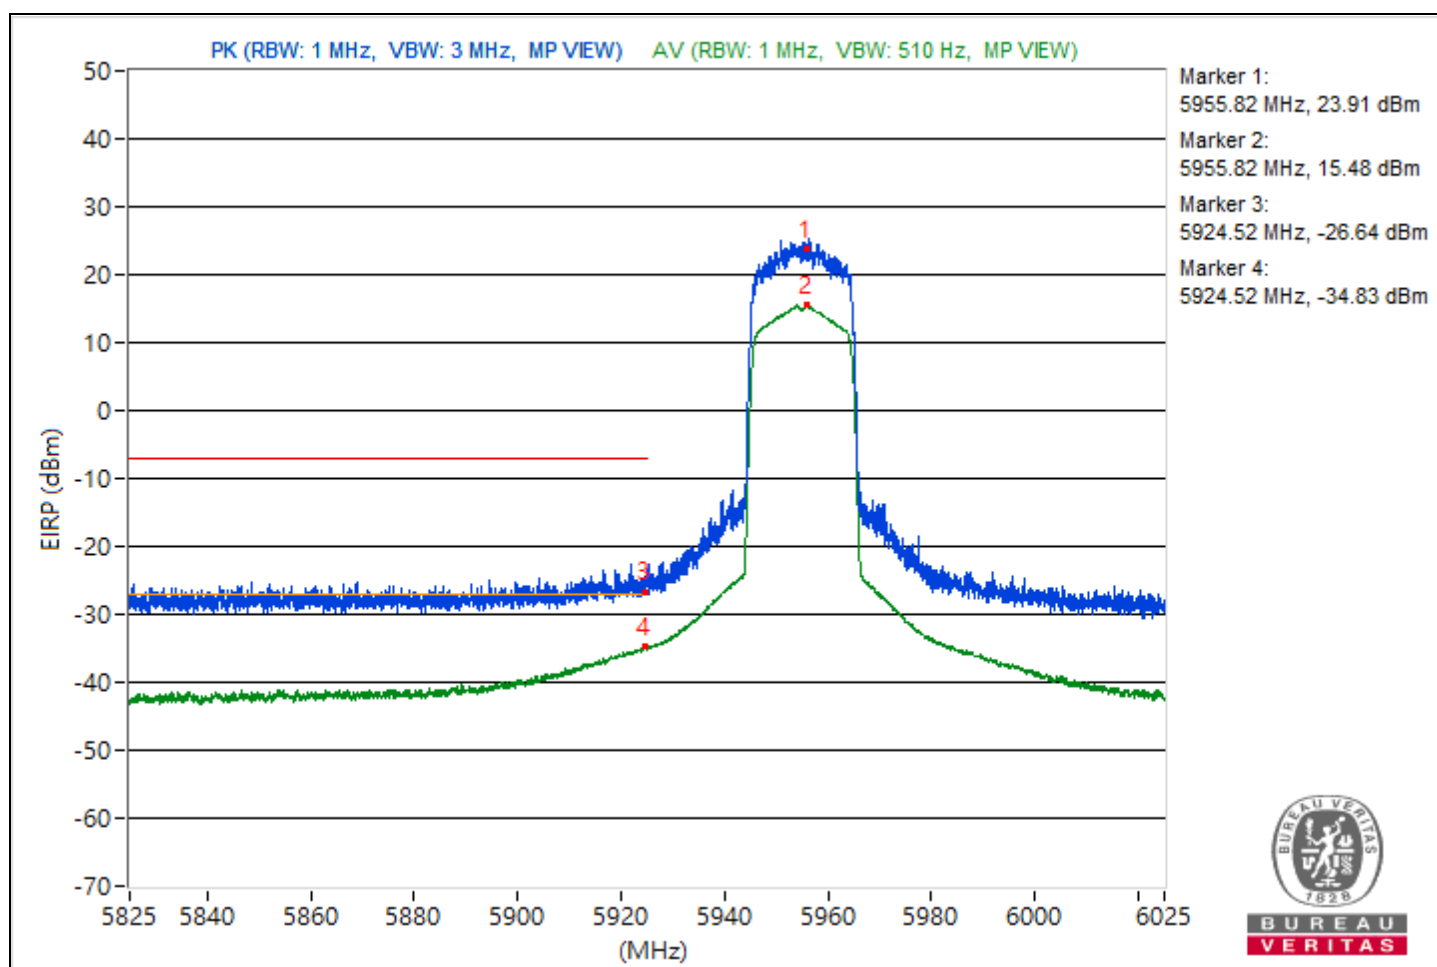


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6854.09	118.47 PK			11.6	12.04	8.37	23.21
2	*6854.09	111.04 AV			4.36	4.44	8.37	15.78
3	#7181.29	66.37 PK	88.26	-21.89	-39.64	-41.01	8.37	-28.89
4	#7181.29	54.78 AV	68.26	-13.48	-52.54	-51.27	8.37	-40.48

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

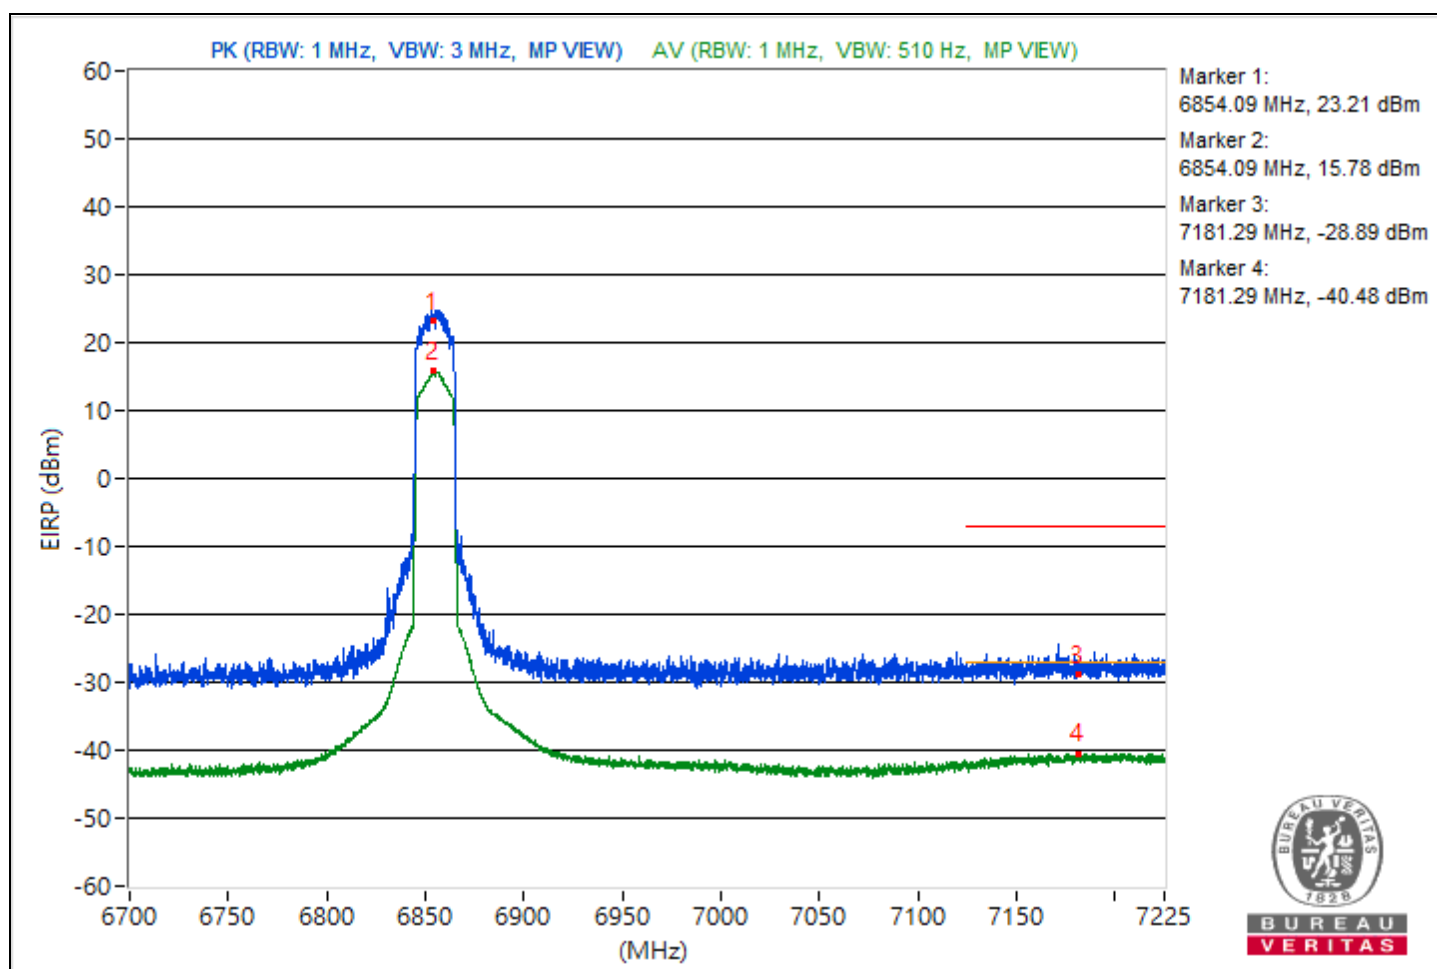


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5966.75	116.63 PK			9.81	10.17	8.37	21.37
2	*5966.75	108.96 AV			2.59	2.03	8.37	13.7
3	#5924.62	73.25 PK	88.26	-15.01	-32.89	-33.96	8.37	-22.01
4	#5924.62	64.67 AV	68.26	-3.59	-41.89	-42.05	8.37	-30.59

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

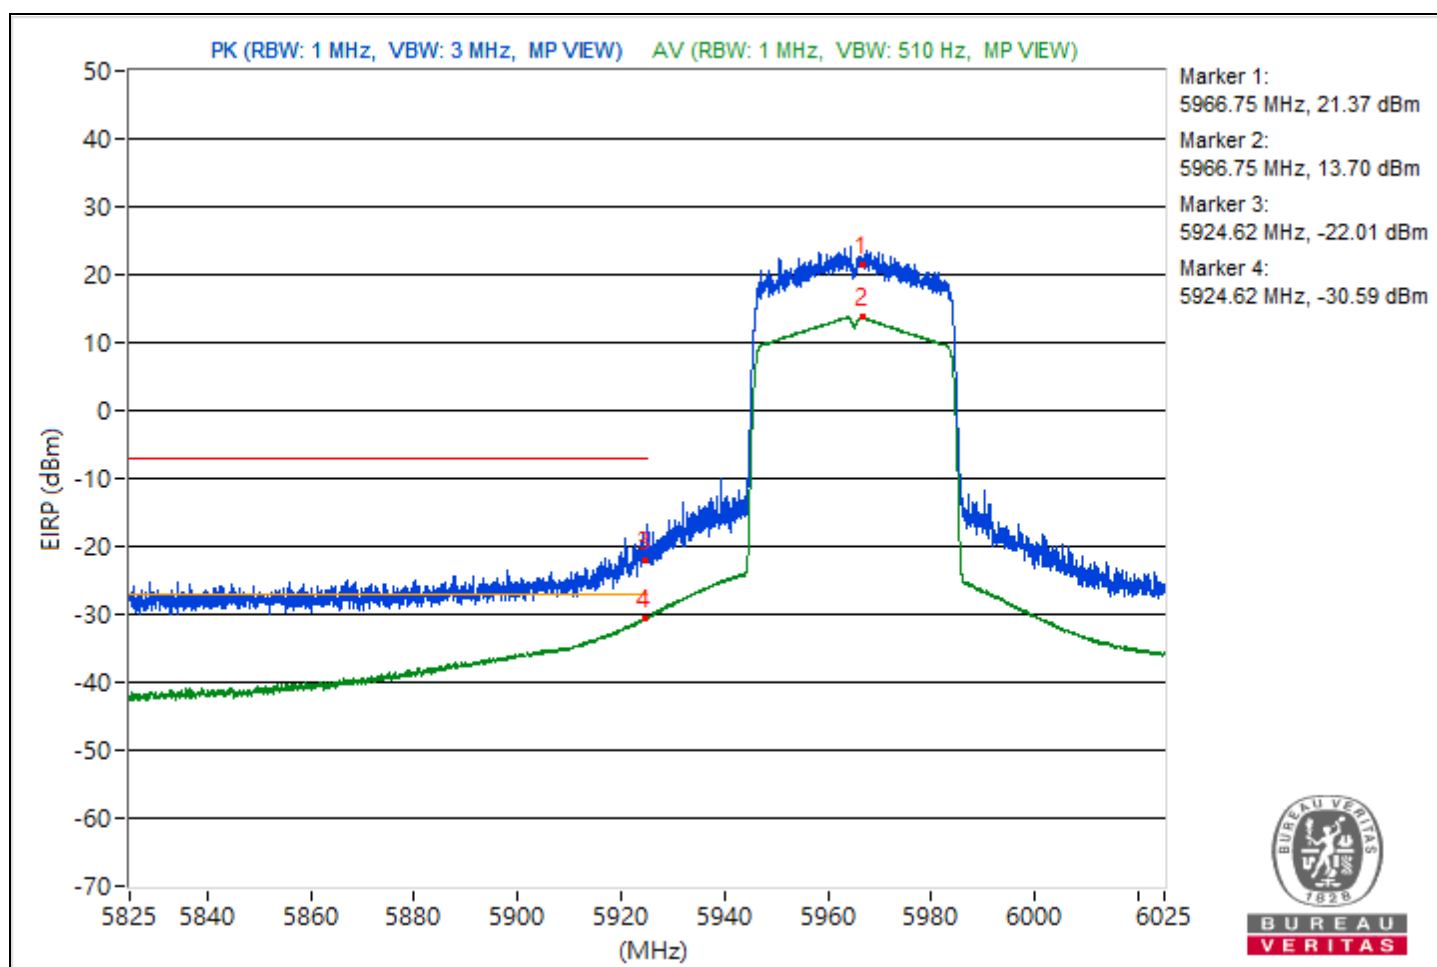


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6846.54	117.99 PK			10.73	11.89	8.37	22.73
2	*6846.54	108.9 AV			1.93	2.58	8.37	13.64
3	#7179.78	66.91 PK	88.26	-21.35	-39.43	-40.06	8.37	-28.35
4	#7179.78	54.73 AV	68.26	-13.53	-51.05	-52.99	8.37	-40.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

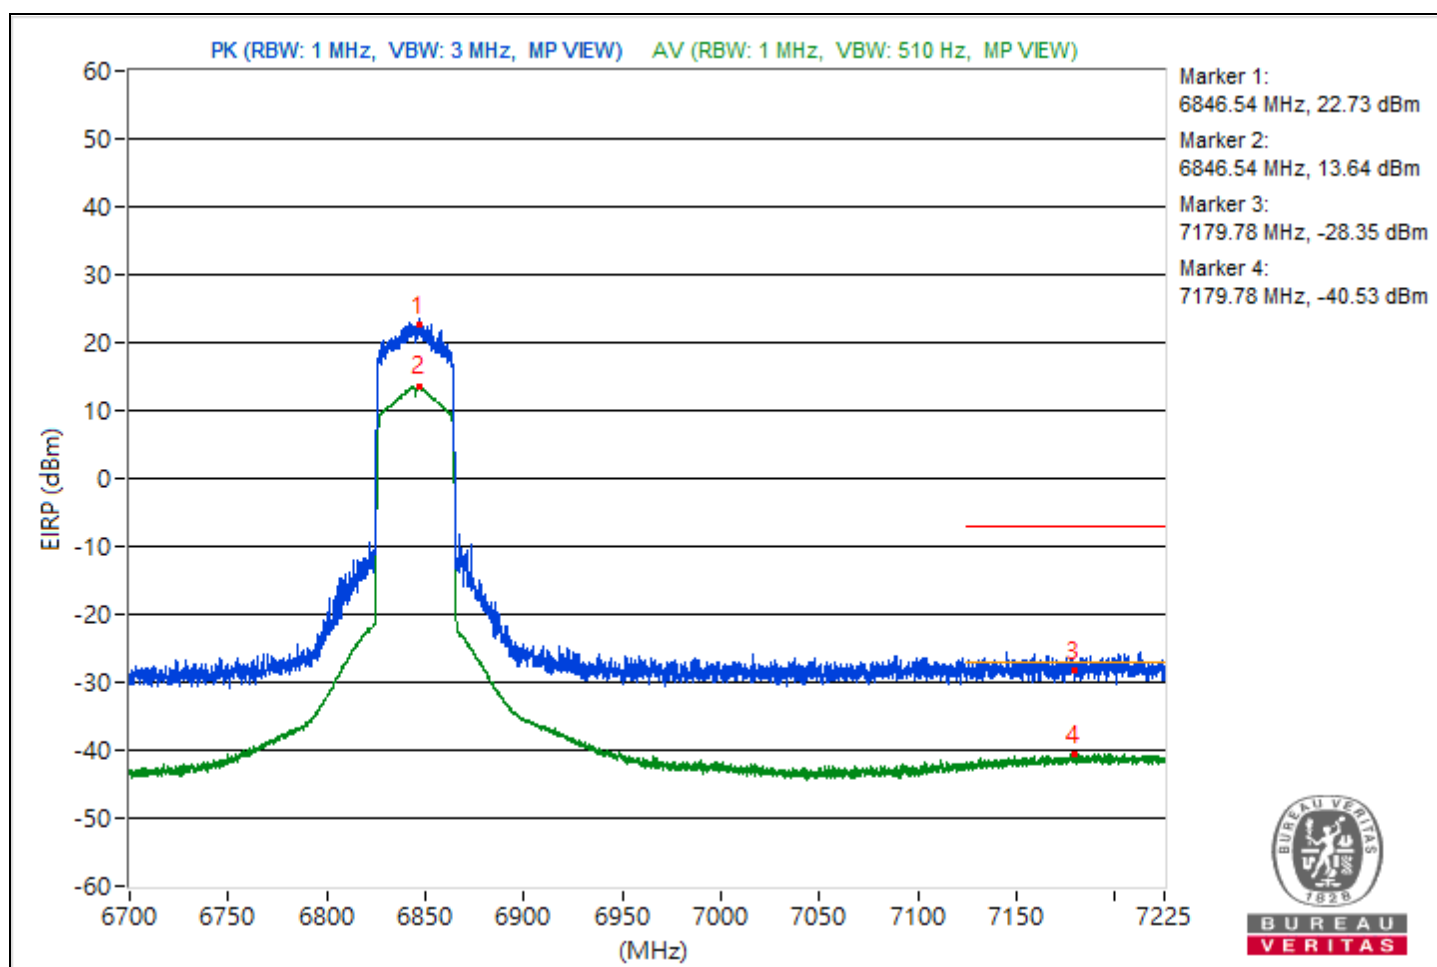


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982.82	112.61 PK			5.87	6.06	8.37	17.35
2	*5982.82	105.86 AV			-0.46	-1.13	8.37	10.6
3	#5923.95	75.35 PK	88.26	-12.91	-30.37	-32.46	8.37	-19.91
4	#5923.95	66.74 AV	68.26	-1.52	-38.84	-41.31	8.37	-28.52

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

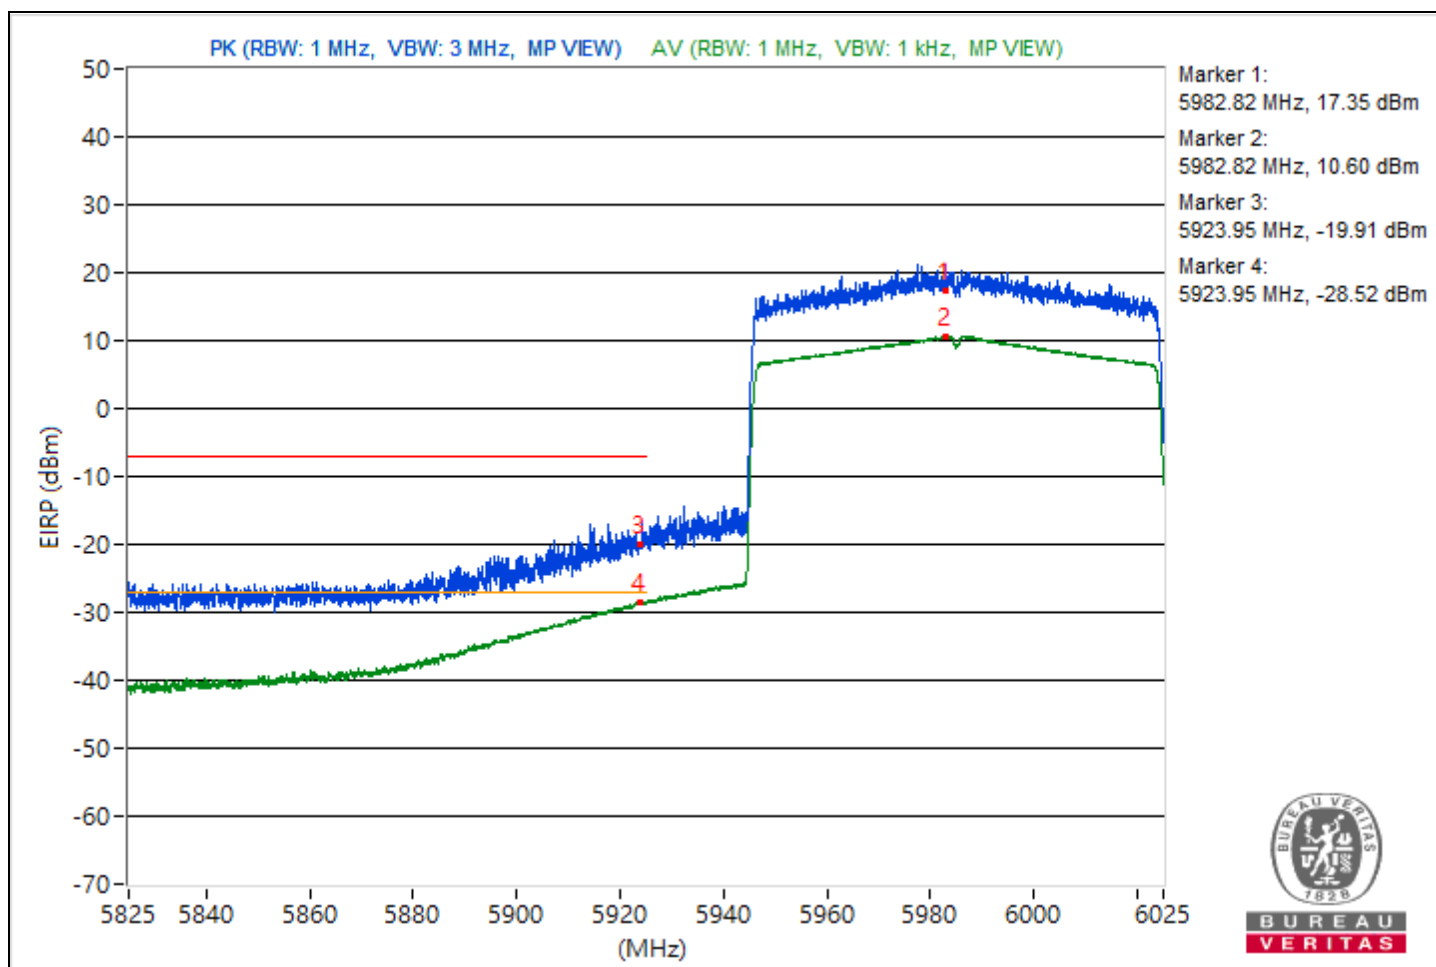


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6783.28	113.46 PK			6.87	6.76	8.37	18.2
2	*6783.28	105.97 AV			-0.42	-0.93	8.37	10.71
3	#7209.05	66.84 PK	88.26	-21.42	-40.81	-38.99	8.37	-28.42
4	#7209.05	55.42 AV	68.26	-12.84	-52.66	-50.14	8.37	-39.84

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

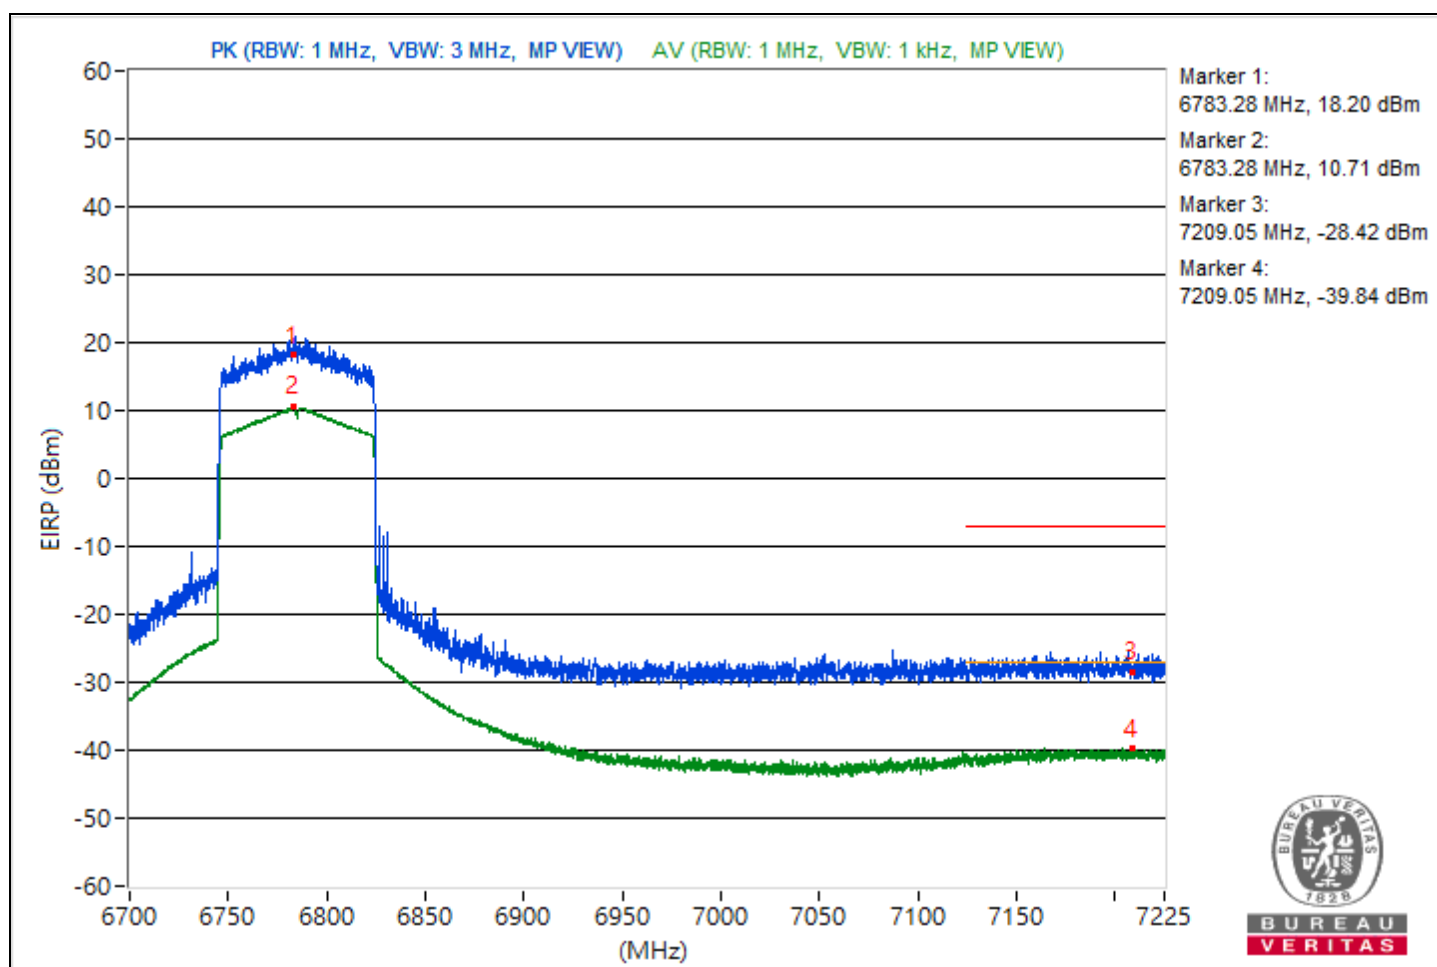


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.75	111.36 PK			4.03	5.32	8.37	16.1
2	*6022.75	102.87 AV			-3.83	-3.71	8.37	7.61
3	#5924.02	73.43 PK	88.26	-14.83	-34.1	-32.48	8.37	-21.83
4	#5924.02	65.56 AV	68.26	-2.7	-40.37	-41.94	8.37	-29.7

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

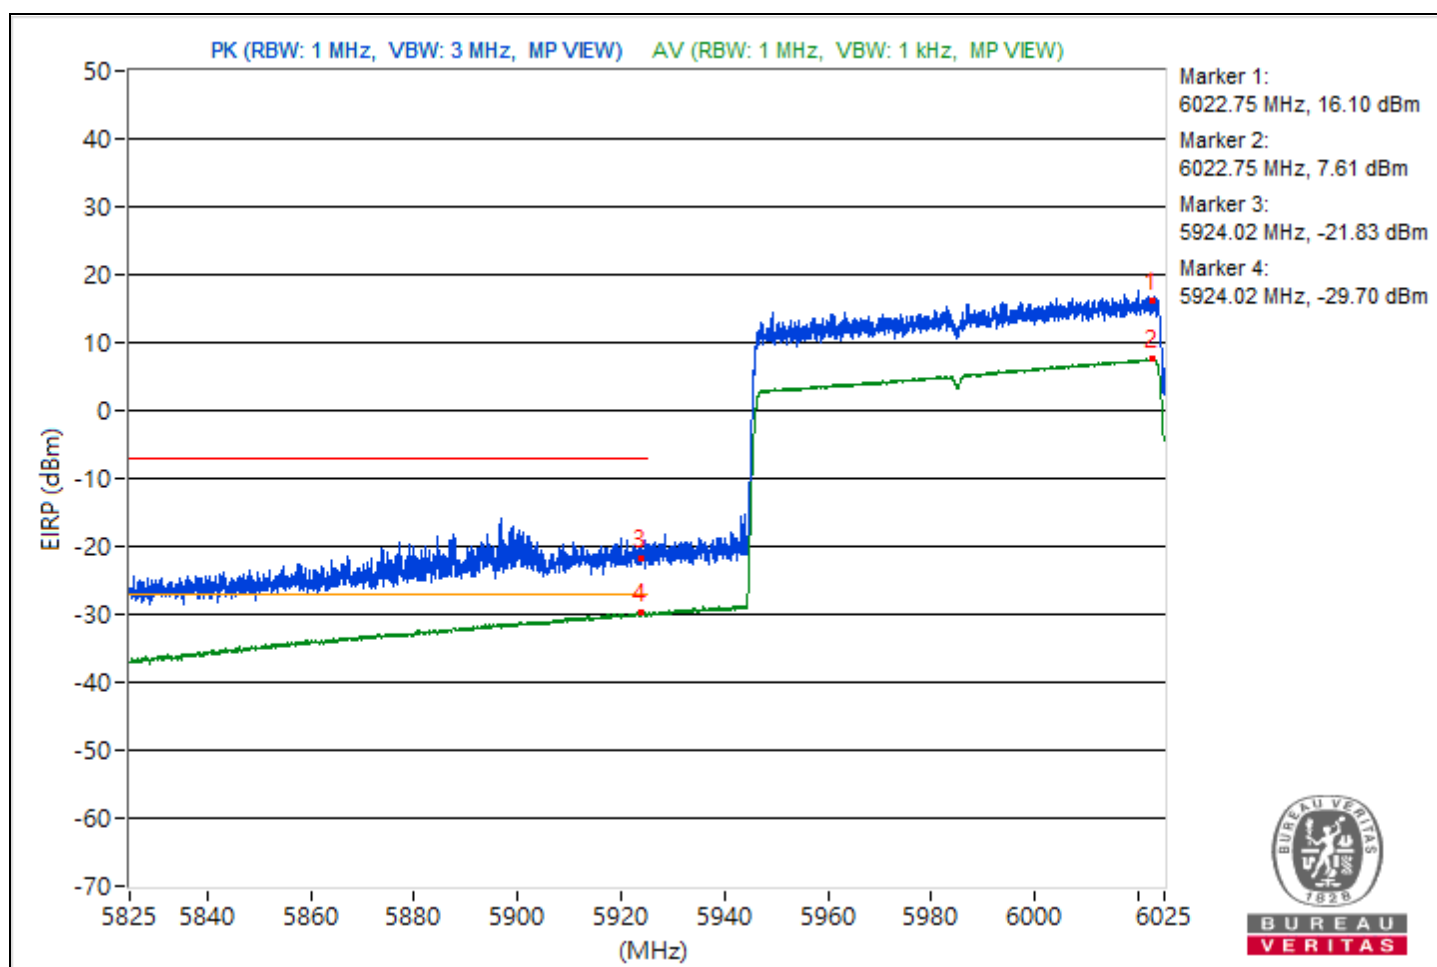


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6700.26	109.3 PK			2.13	3.12	8.37	14.04
2	*6700.26	99.86 AV			-6.38	-7.23	8.37	4.6
3	#7221.39	66.73 PK	88.26	-21.53	-41.46	-38.77	8.37	-28.53
4	#7221.39	55.3 AV	68.26	-12.96	-52	-50.77	8.37	-39.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

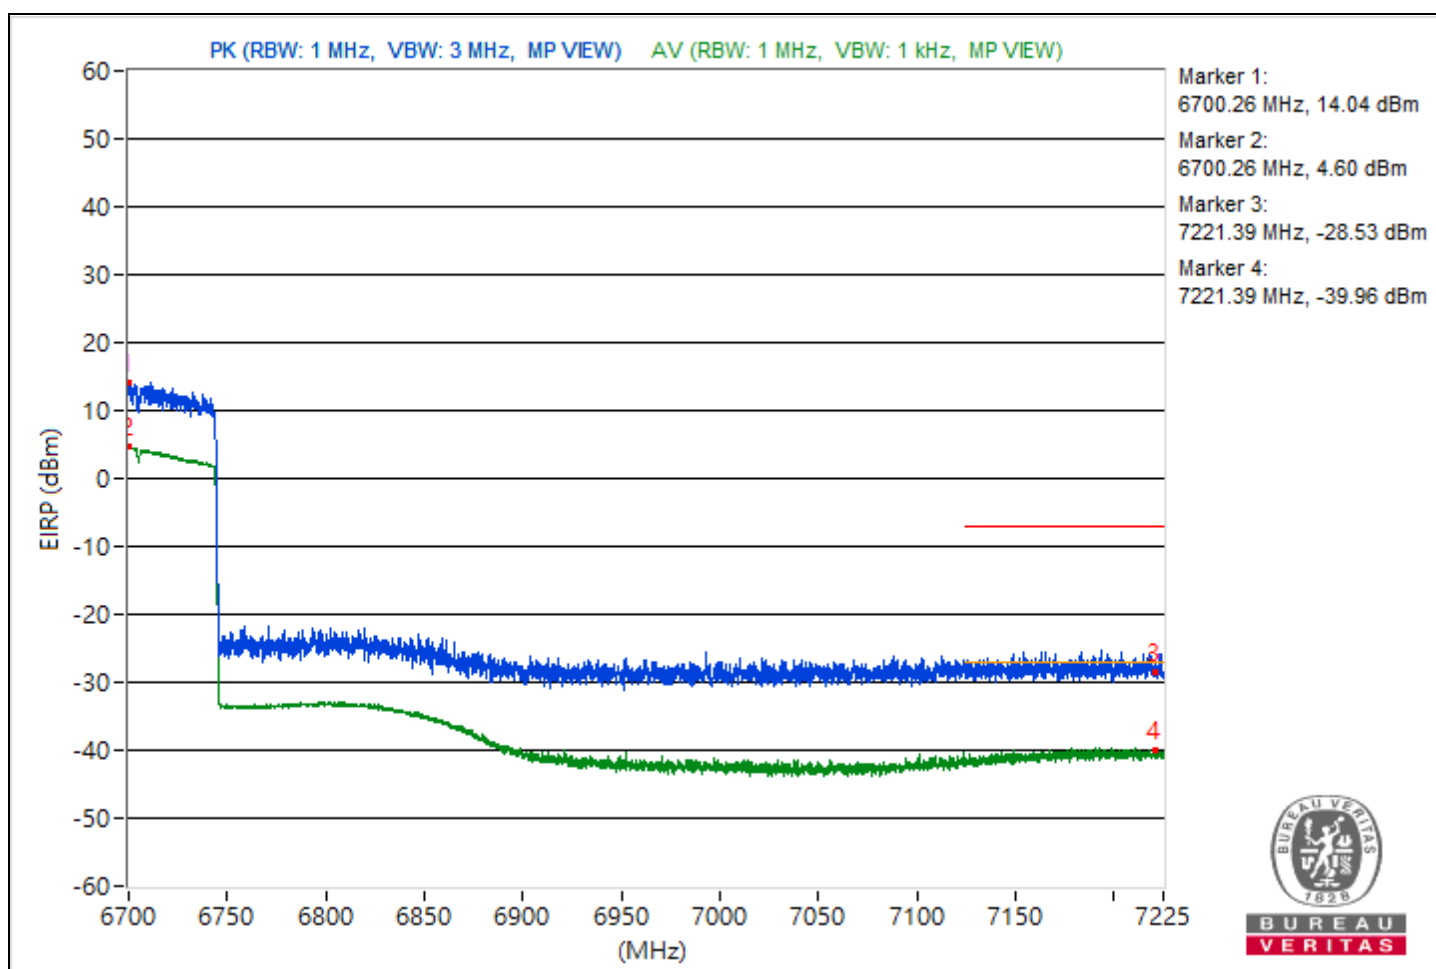


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.55	120.73 PK			14.49	13.64	8.37	25.47
2	*5946.55	111.58 AV			5.11	4.76	8.37	16.32
3	#5865.98	68.11 PK	88.26	-20.15	-38.07	-39.04	8.37	-27.15
4	#5865.98	56.43 AV	68.26	-11.83	-50.74	-49.74	8.37	-38.83

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

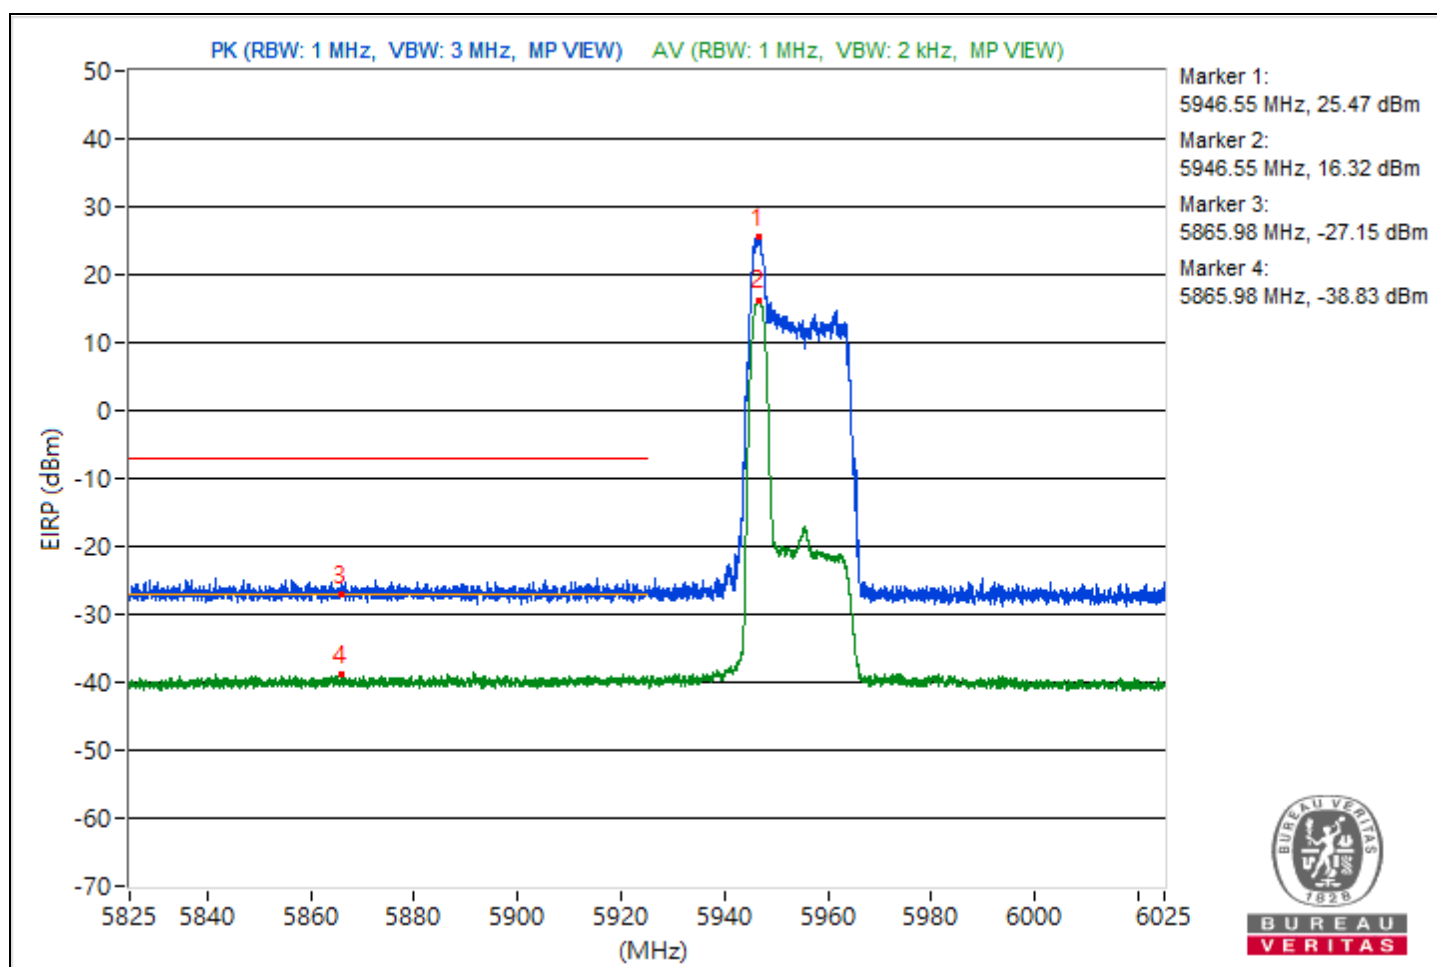


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6863.47	121.08 PK			14.91	13.92	8.37	25.82
2	*6863.47	111.21 AV			4.73	4.41	8.37	15.95
3	#7207.87	68.43 PK	88.26	-19.83	-38	-38.44	8.37	-26.83
4	#7207.87	57.47 AV	68.26	-10.79	-49.9	-48.56	8.37	-37.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

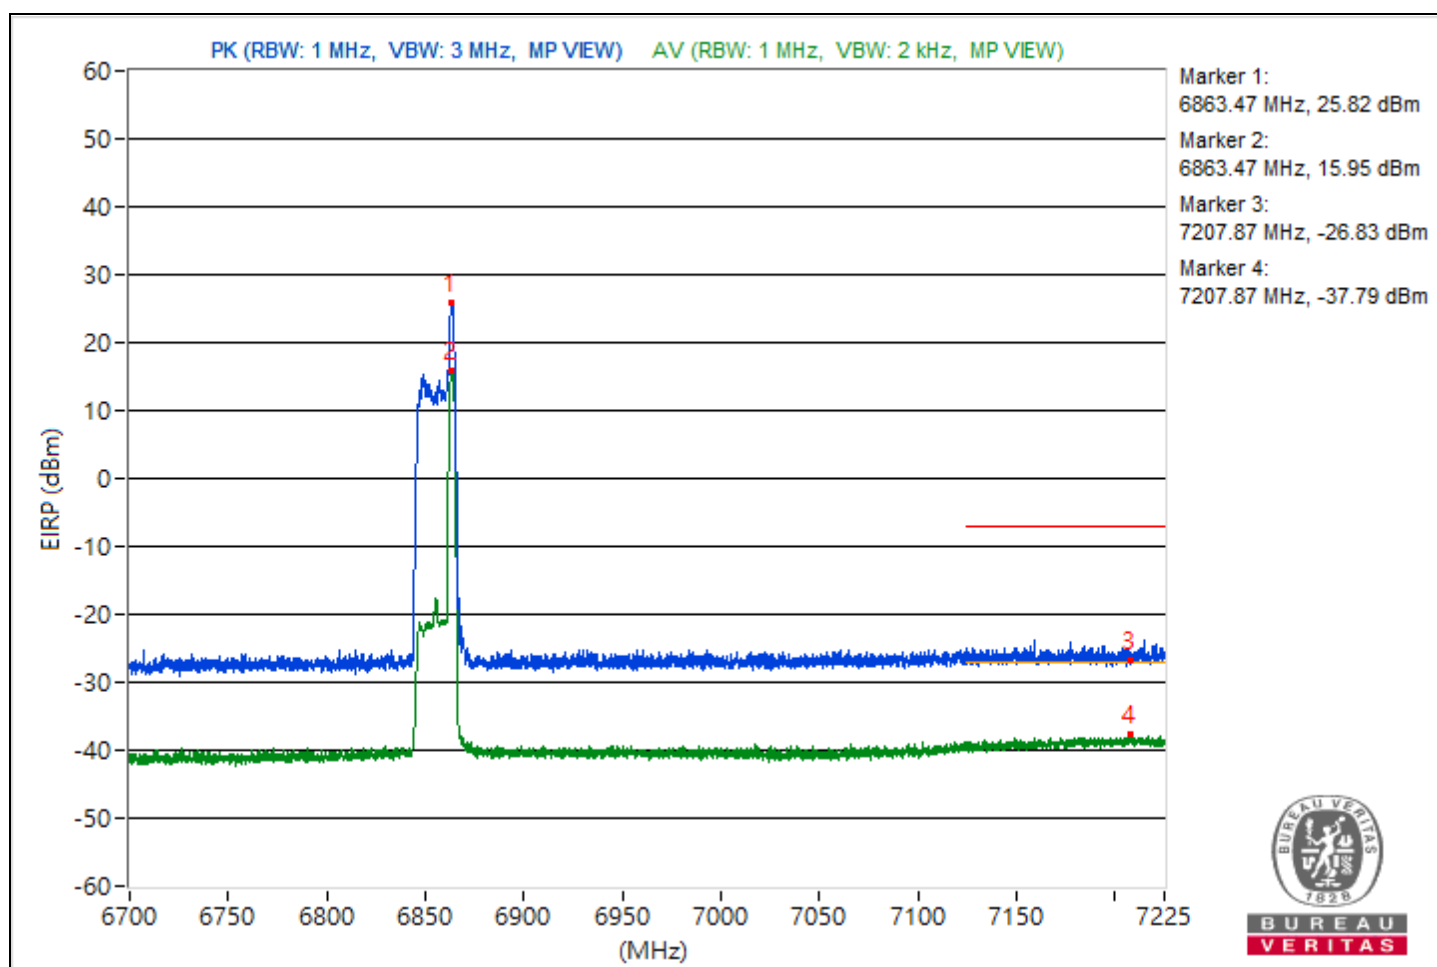


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5948.77	120.33 PK			13.46	13.91	8.37	25.07
2	*5948.77	111.58 AV			5.02	4.86	8.37	16.32
3	#5916.12	69.18 PK	88.26	-19.08	-37.23	-37.69	8.37	-26.08
4	#5916.12	57.16 AV	68.26	-11.1	-50.17	-48.89	8.37	-38.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

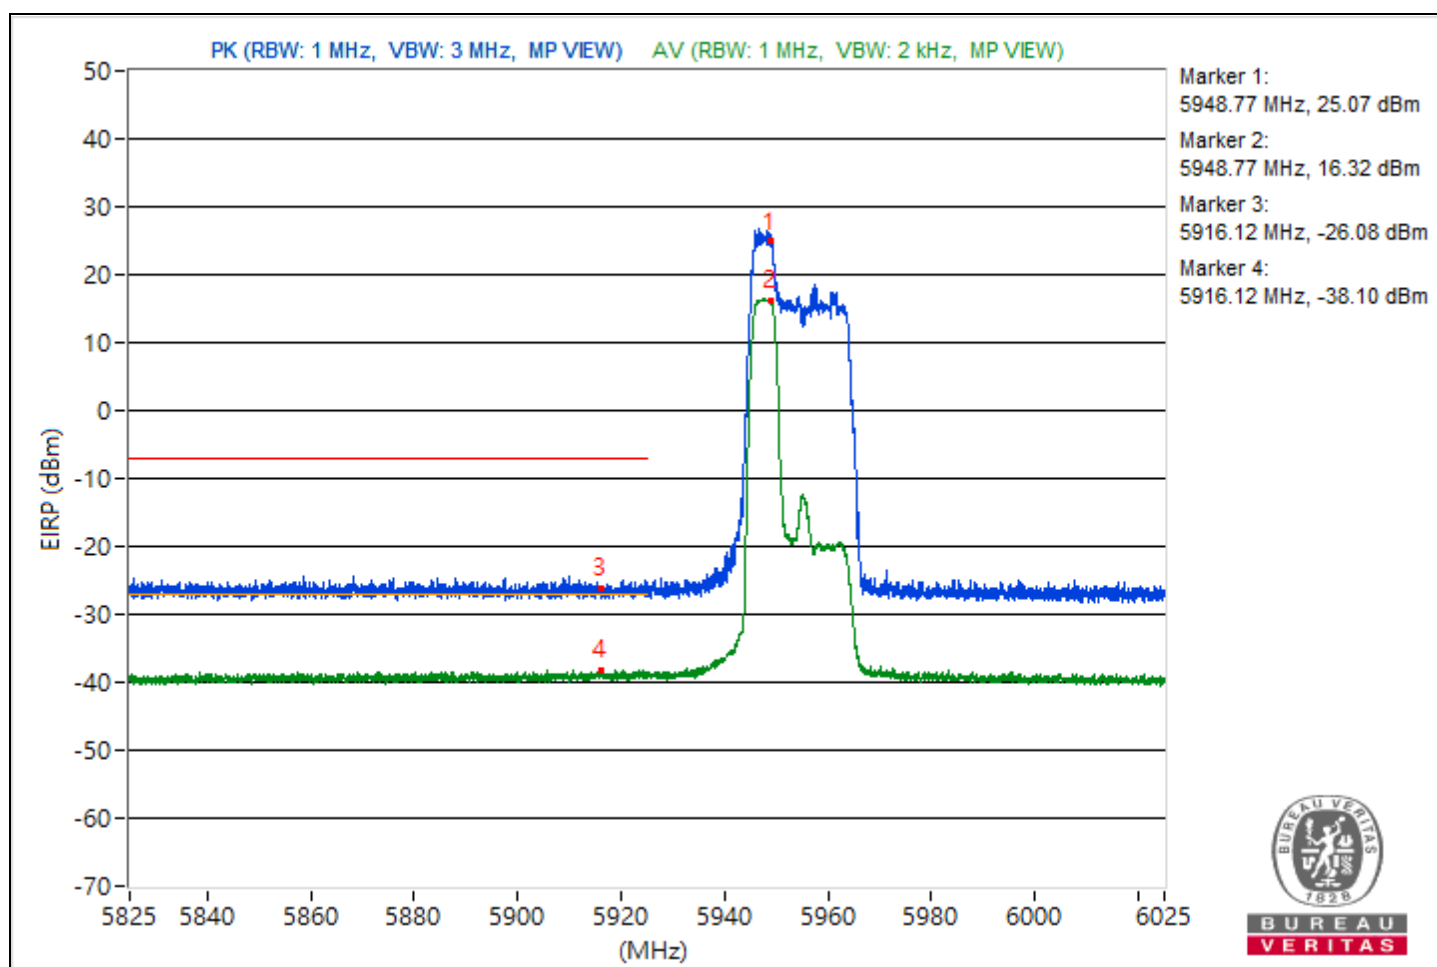


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6861.63	120.3 PK			13.1	14.15	8.37	25.04
2	*6861.63	111.84 AV			5.25	5.14	8.37	16.58
3	#7207.08	68.51 PK	88.26	-19.75	-37.82	-38.47	8.37	-26.75
4	#7207.08	57.63 AV	68.26	-10.63	-48.42	-49.69	8.37	-37.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

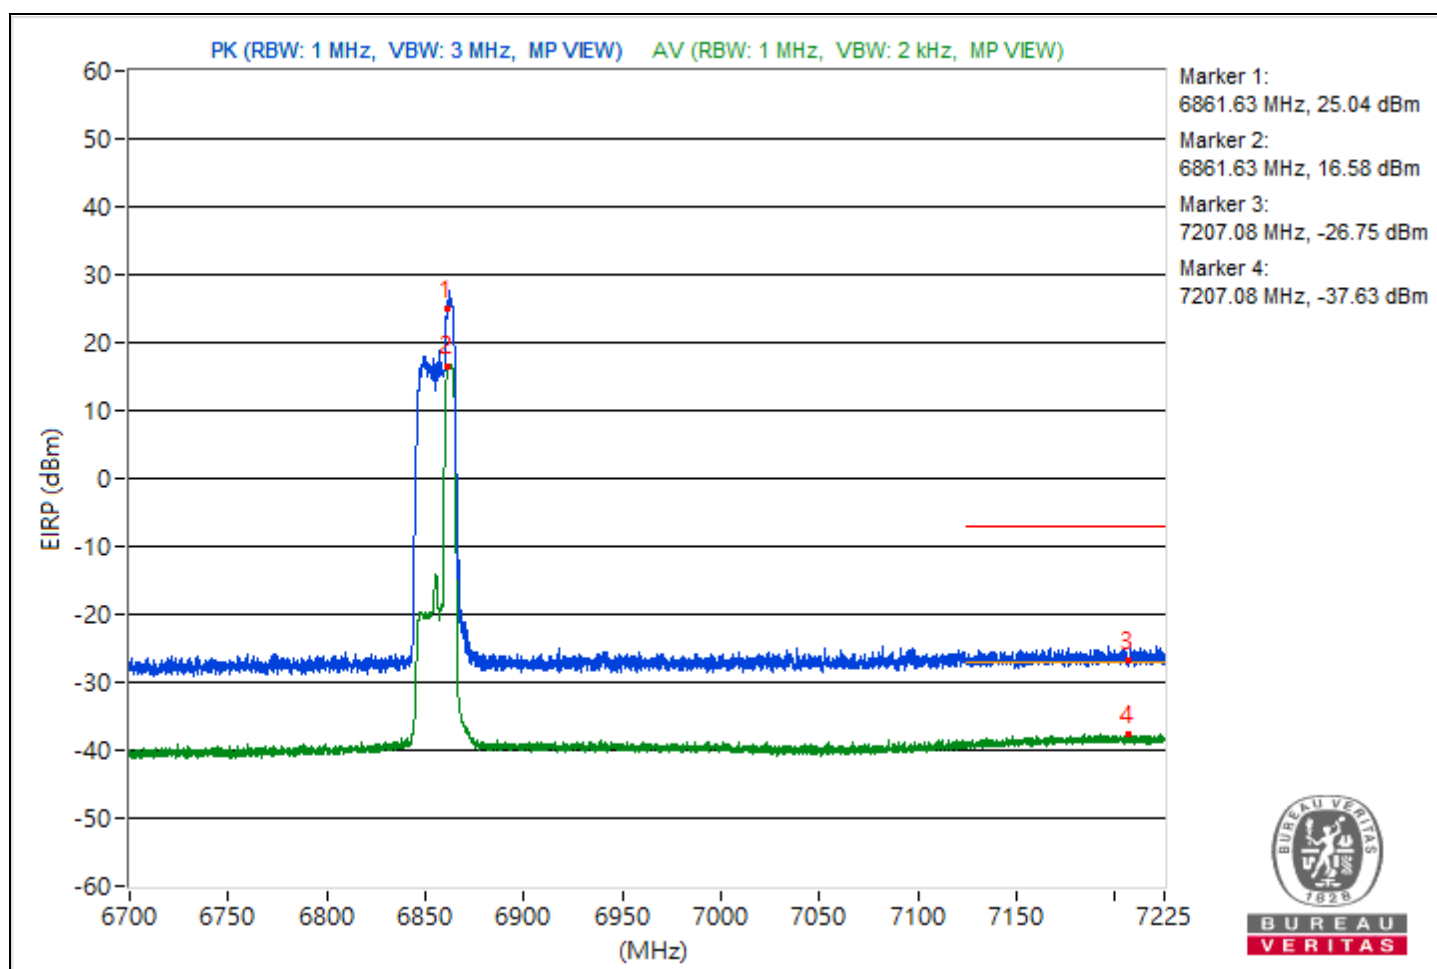


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.82	119.9 PK			13.19	13.33	8.37	24.64
2	*5946.82	111.66 AV			5.25	4.78	8.37	16.4
3	#5923.35	70.43 PK	88.26	-17.83	-35.49	-37.07	8.37	-24.83
4	#5923.35	58.16 AV	68.26	-10.1	-49.07	-47.96	8.37	-37.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

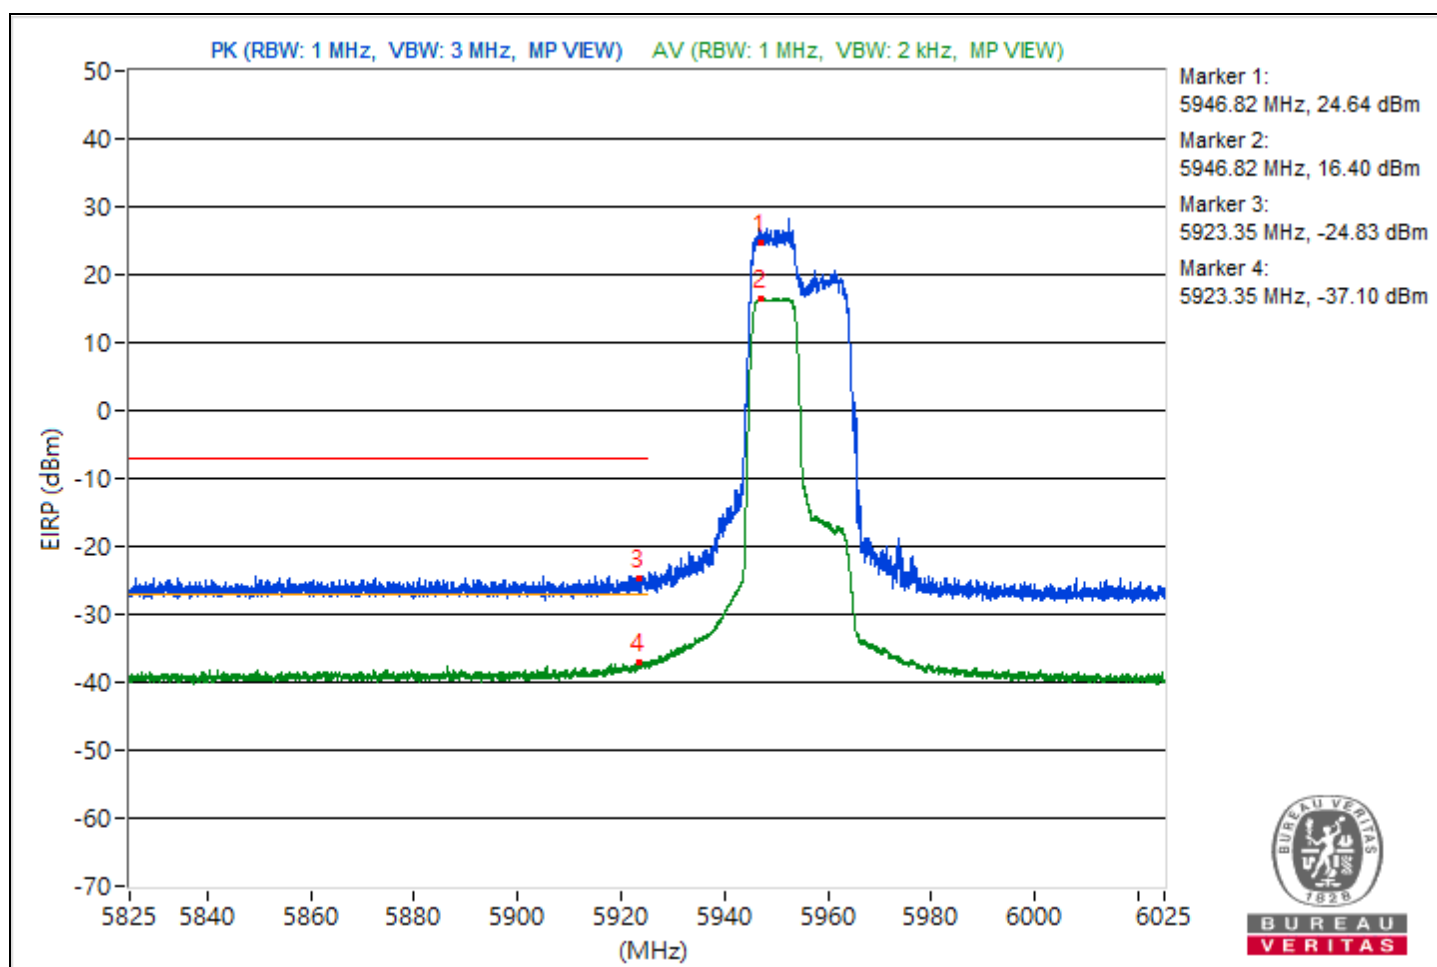


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6862.29	120.92 PK			14.53	14.02	8.37	25.66
2	*6862.29	111.96 AV			5.07	5.57	8.37	16.7
3	#7212.01	68.45 PK	88.26	-19.81	-38.62	-37.81	8.37	-26.81
4	#7212.01	57.39 AV	68.26	-10.87	-49.84	-48.73	8.37	-37.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

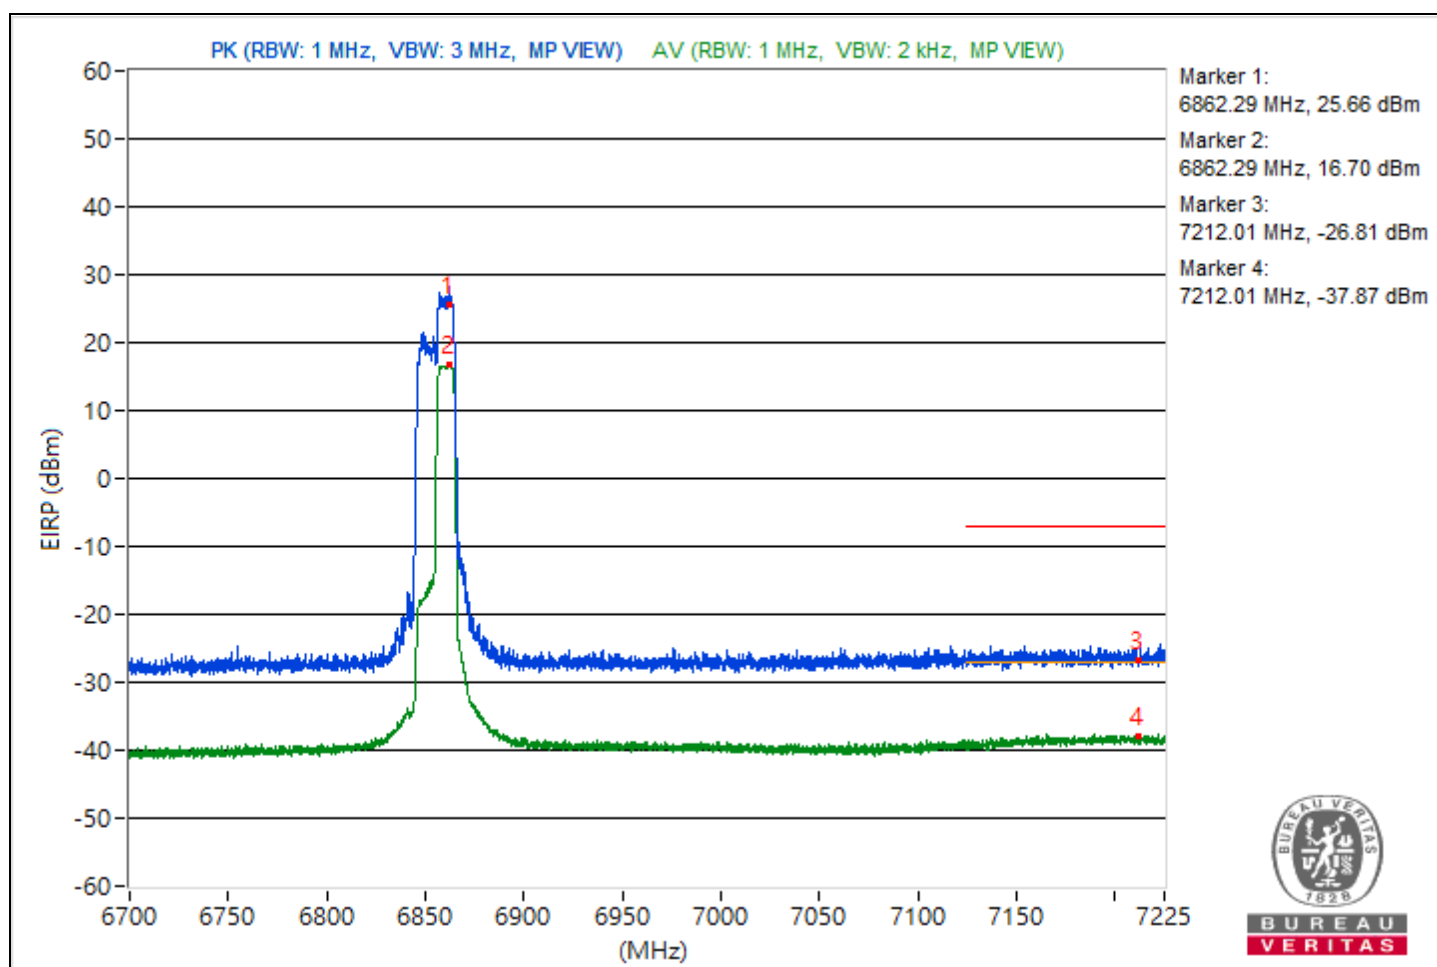


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5951.27	120.51 PK			13.71	14.03	8.37	25.25
2	*5951.27	111.7 AV			5.23	4.89	8.37	16.44
3	#5924.9	70.3 PK	88.26	-17.96	-35.71	-37.09	8.37	-24.96
4	#5924.9	57.17 AV	68.26	-11.09	-48.7	-50.42	8.37	-38.09

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

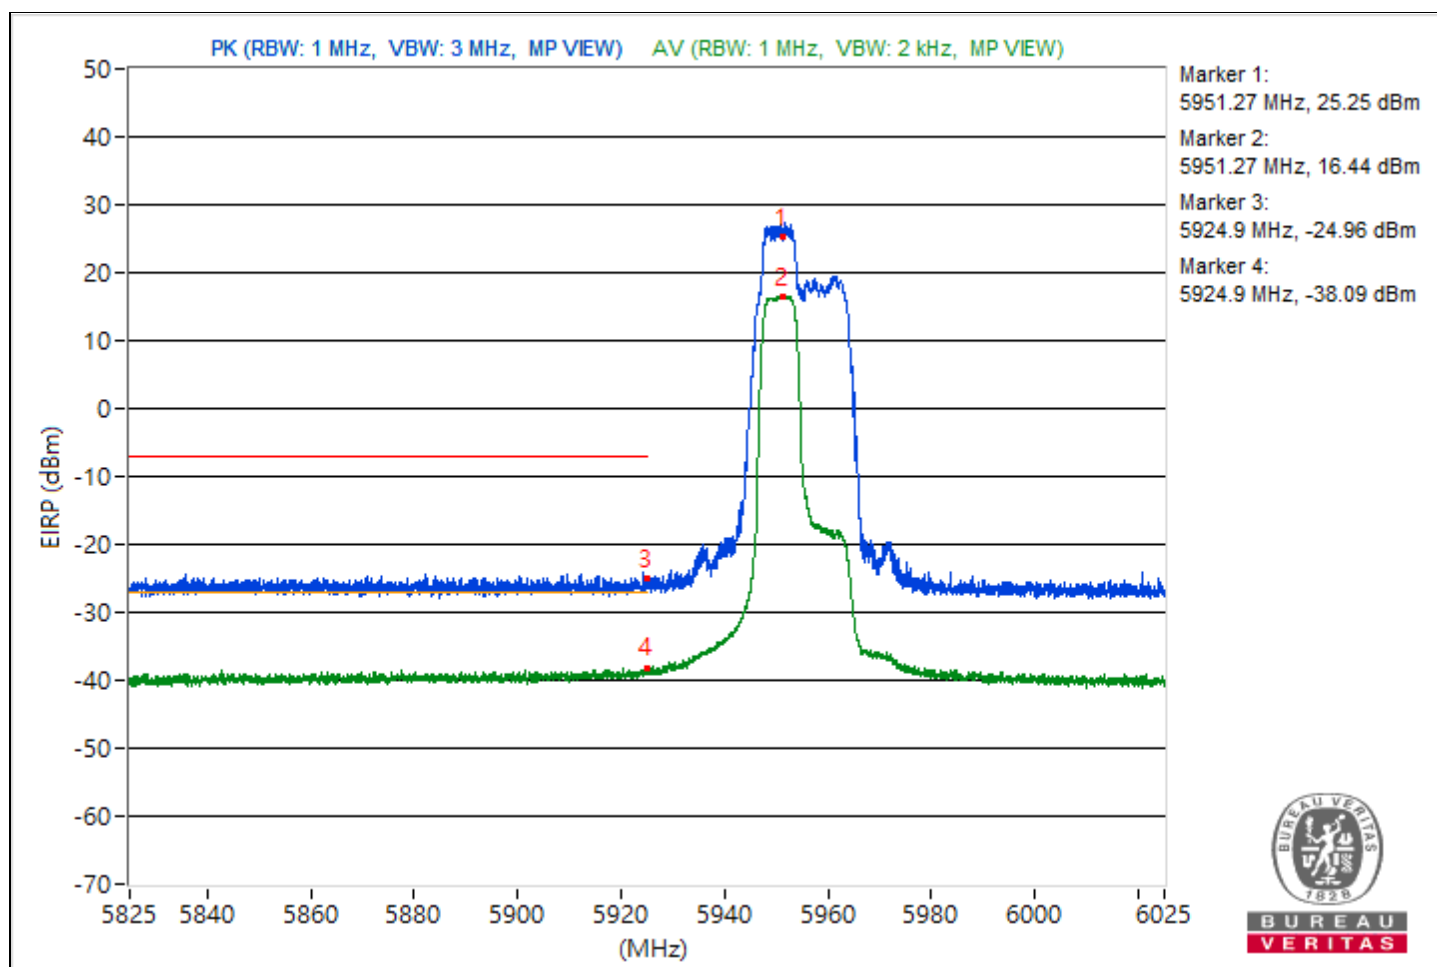


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6859.07	119.84 PK			13.03	13.36	8.37	24.58
2	*6859.07	111.5 AV			4.77	4.95	8.37	16.24
3	#7178.93	68.91 PK	88.26	-19.35	-37.72	-37.75	8.37	-26.35
4	#7178.93	57.47 AV	68.26	-10.79	-50.4	-48.2	8.37	-37.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

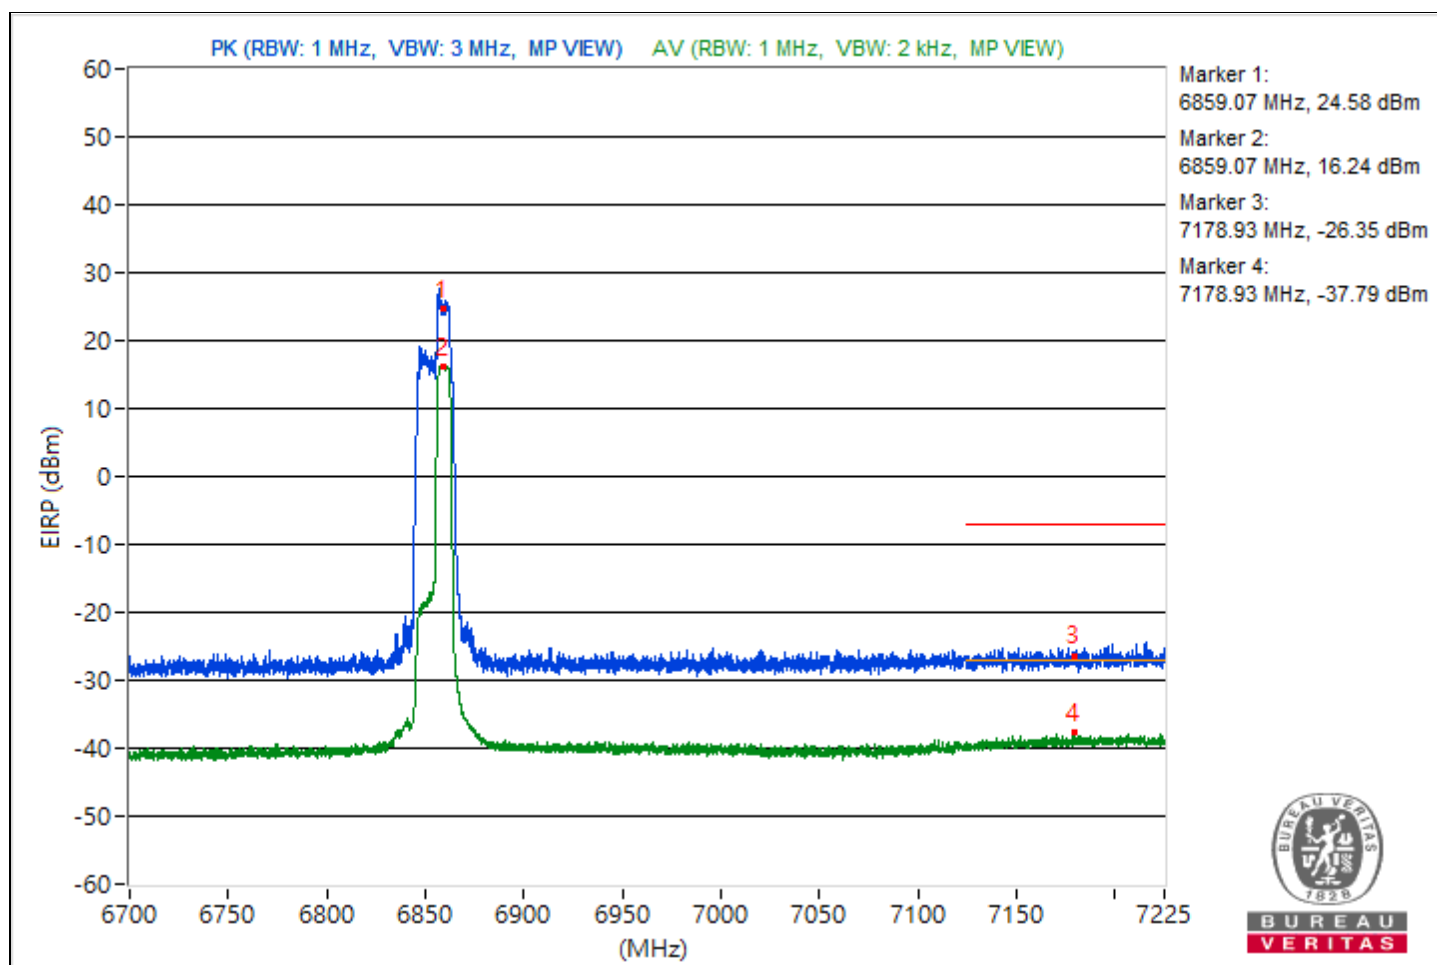


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.98	120.54 PK			14.66	12.97	8.37	25.28
2	*5953.98	111.76 AV			5.47	4.73	8.37	16.5
3	#5924.15	69.4 PK	88.26	-18.86	-37.71	-36.82	8.37	-25.86
4	#5924.15	58.72 AV	68.26	-9.54	-47.09	-48.93	8.37	-36.54

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

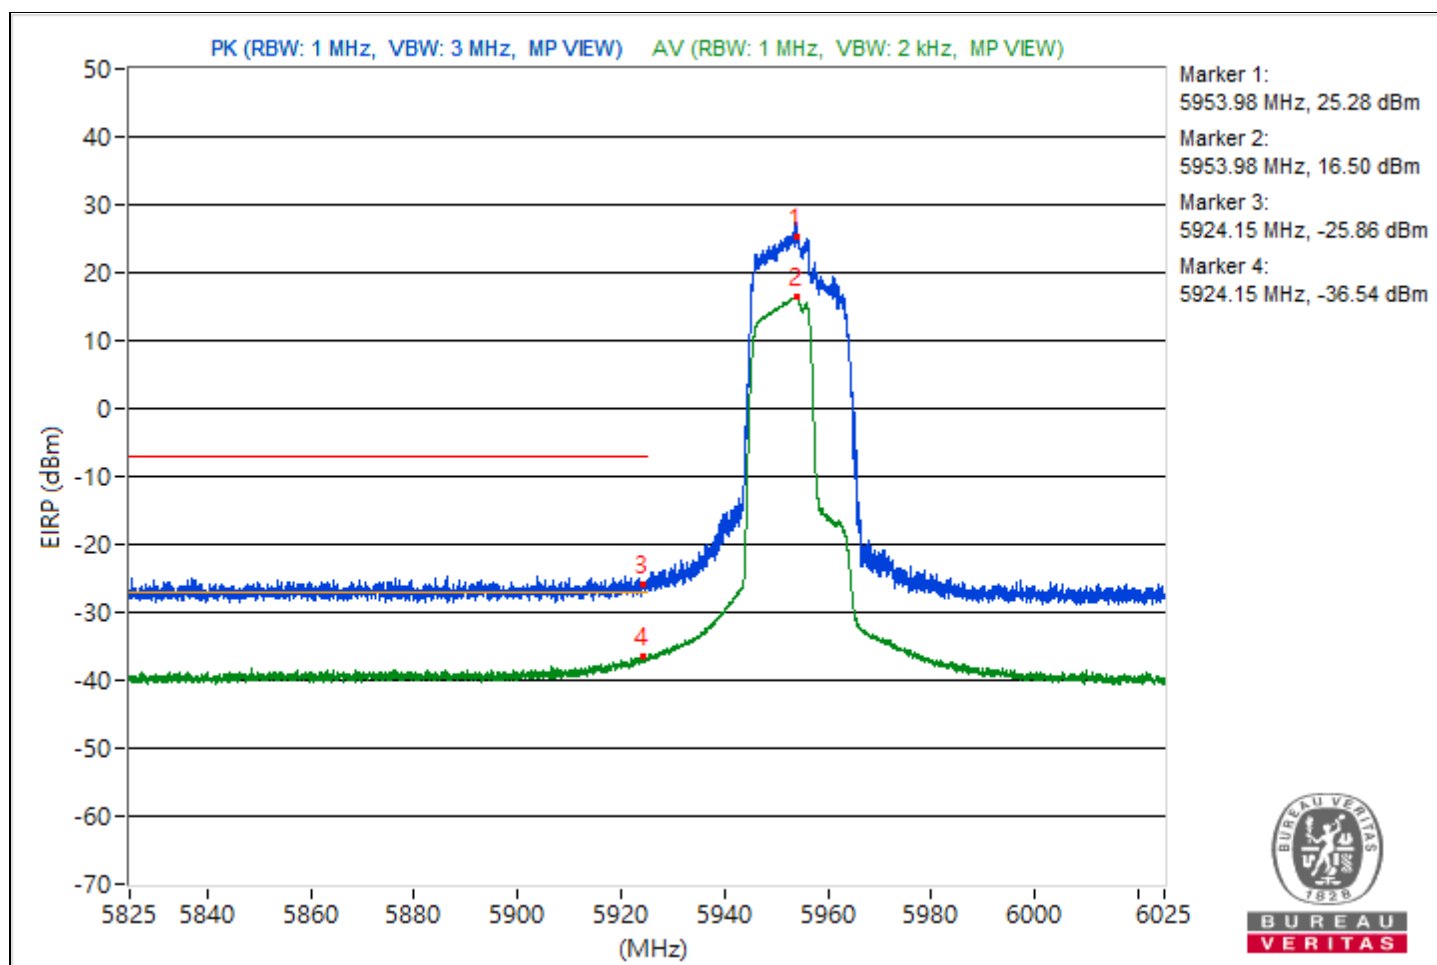


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6856.91	119.53 PK			12.51	13.24	8.37	24.27
2	*6856.91	111.43 AV			4.99	4.59	8.37	16.17
3	#7203.8	69.42 PK	88.26	-18.84	-37.87	-36.65	8.37	-25.84
4	#7203.8	57.63 AV	68.26	-10.63	-48.83	-49.2	8.37	-37.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

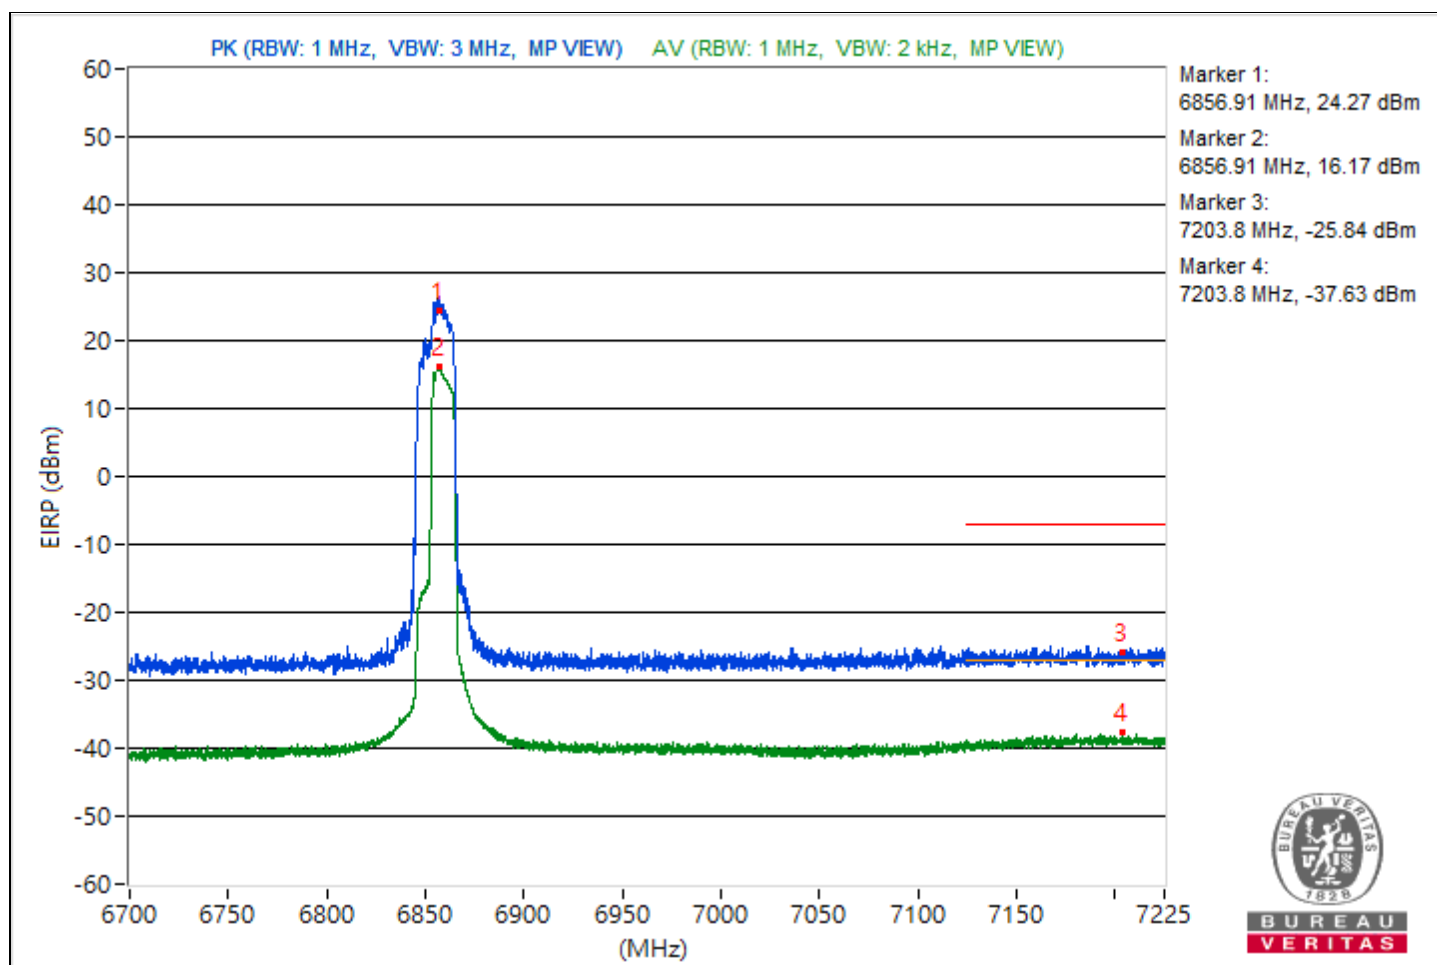


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982.55	117.77 PK			10.24	11.87	8.37	22.51
2	*5982.55	107.94 AV			1.36	1.25	8.37	12.68
3	#5924.95	77.15 PK	88.26	-11.11	-29.53	-29.45	8.37	-18.11
4	#5924.95	67.31 AV	68.26	-0.95	-38.67	-40.1	8.37	-27.95

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

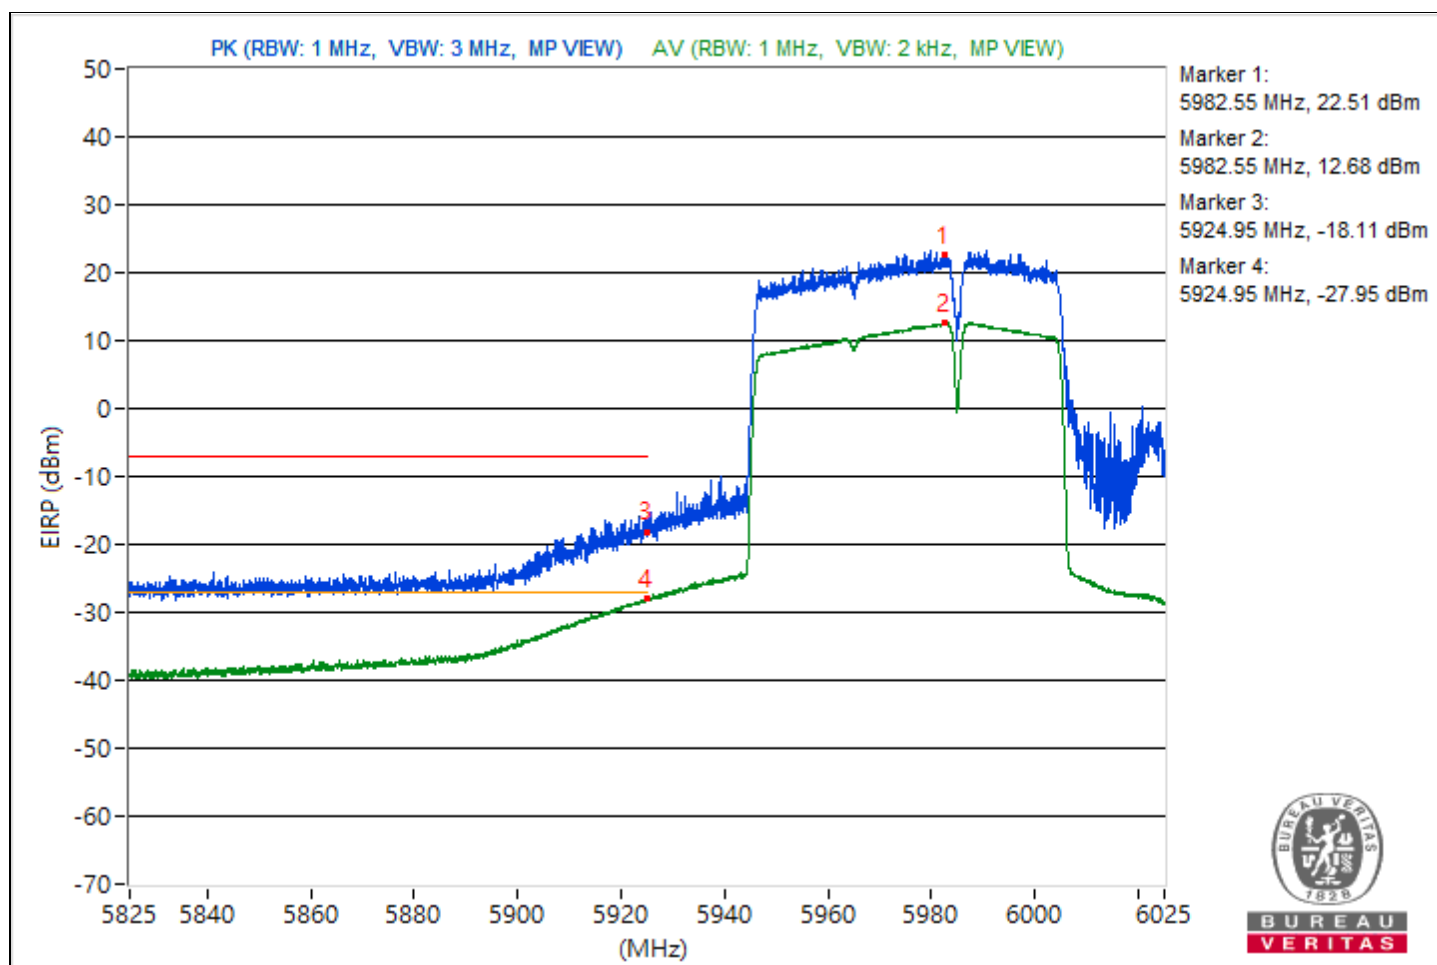


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6787.61	116.82 PK			10.34	10	8.37	21.56
2	*6787.61	107.81 AV			1.53	0.78	8.37	12.55
3	#7216.53	68.67 PK	88.26	-19.59	-37.52	-38.46	8.37	-26.59
4	#7216.53	57.25 AV	68.26	-11.01	-48.79	-50.08	8.37	-38.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

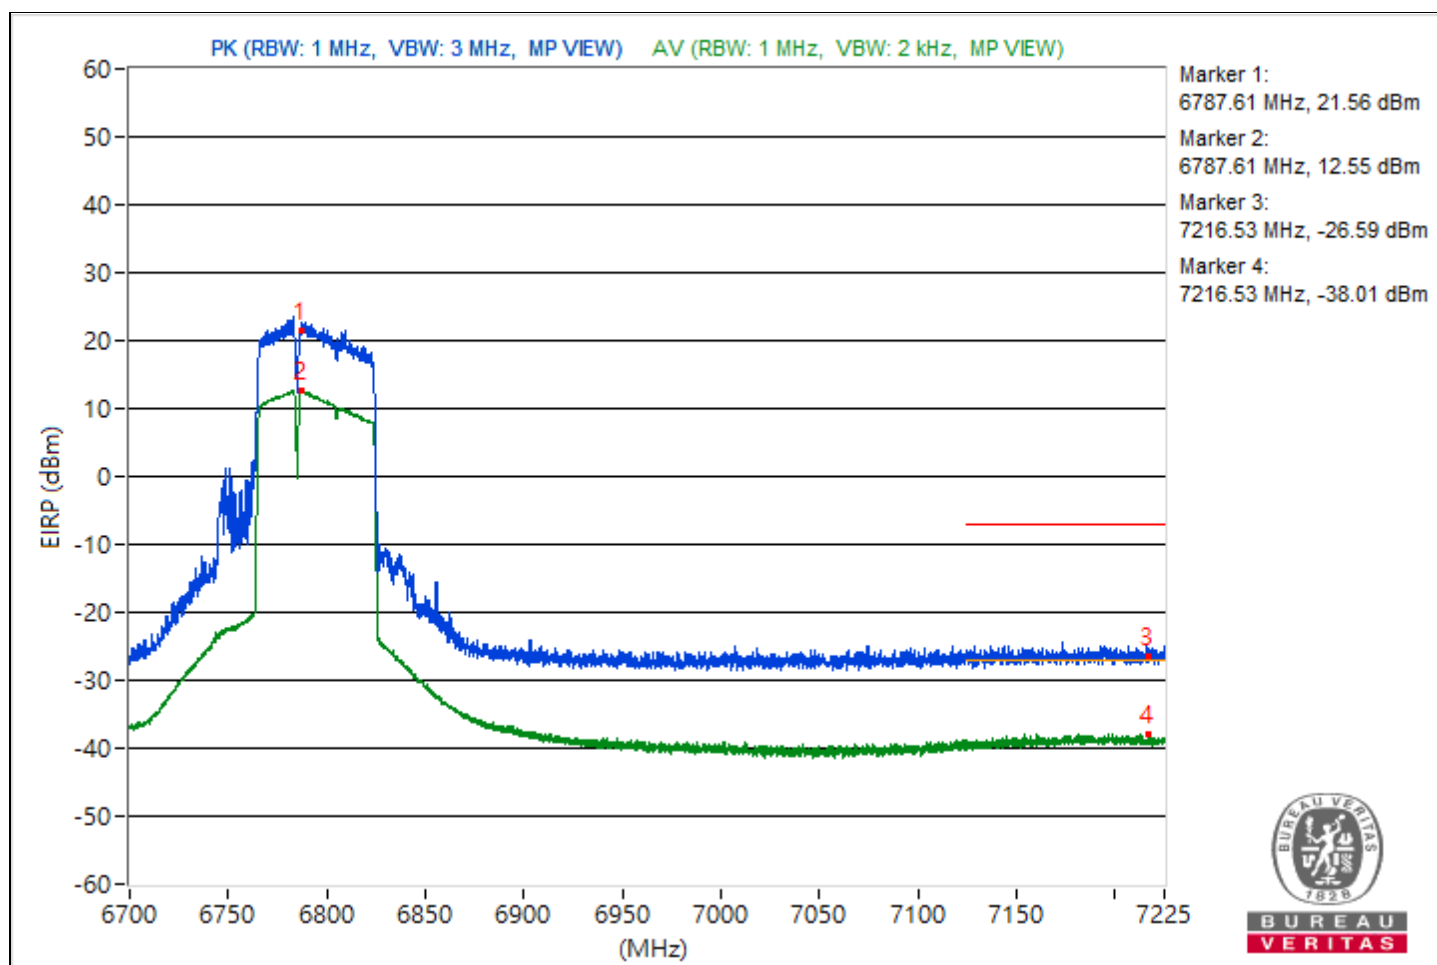


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.57	111.97 PK			5.44	5.22	8.37	16.71
2	*6022.57	104.43 AV			-2.08	-2.34	8.37	9.17
3	#5924.8	75.76 PK	88.26	-12.5	-31.11	-30.66	8.37	-19.5
4	#5924.8	65.56 AV	68.26	-2.7	-40.84	-41.33	8.37	-29.7

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

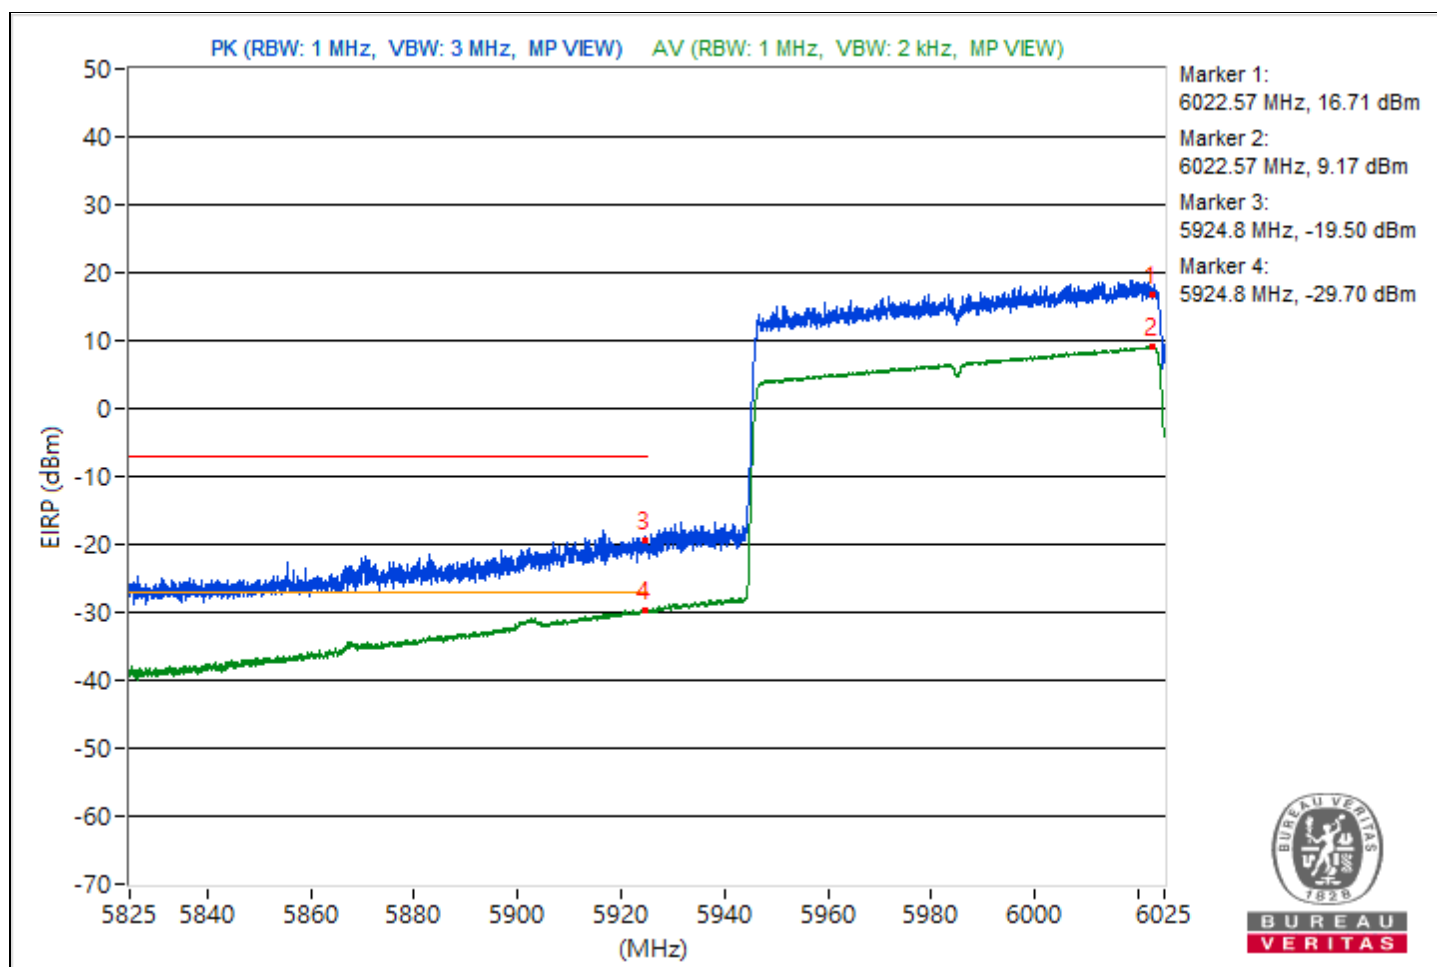


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6701.57	109.45 PK			2.96	2.66	8.37	14.19
2	*6701.57	101.14 AV			-5.2	-5.82	8.37	5.88
3	#7215.09	67.14 PK	88.26	-21.12	-39.01	-40.06	8.37	-28.12
4	#7215.09	56.84 AV	68.26	-11.42	-50.53	-49.18	8.37	-38.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

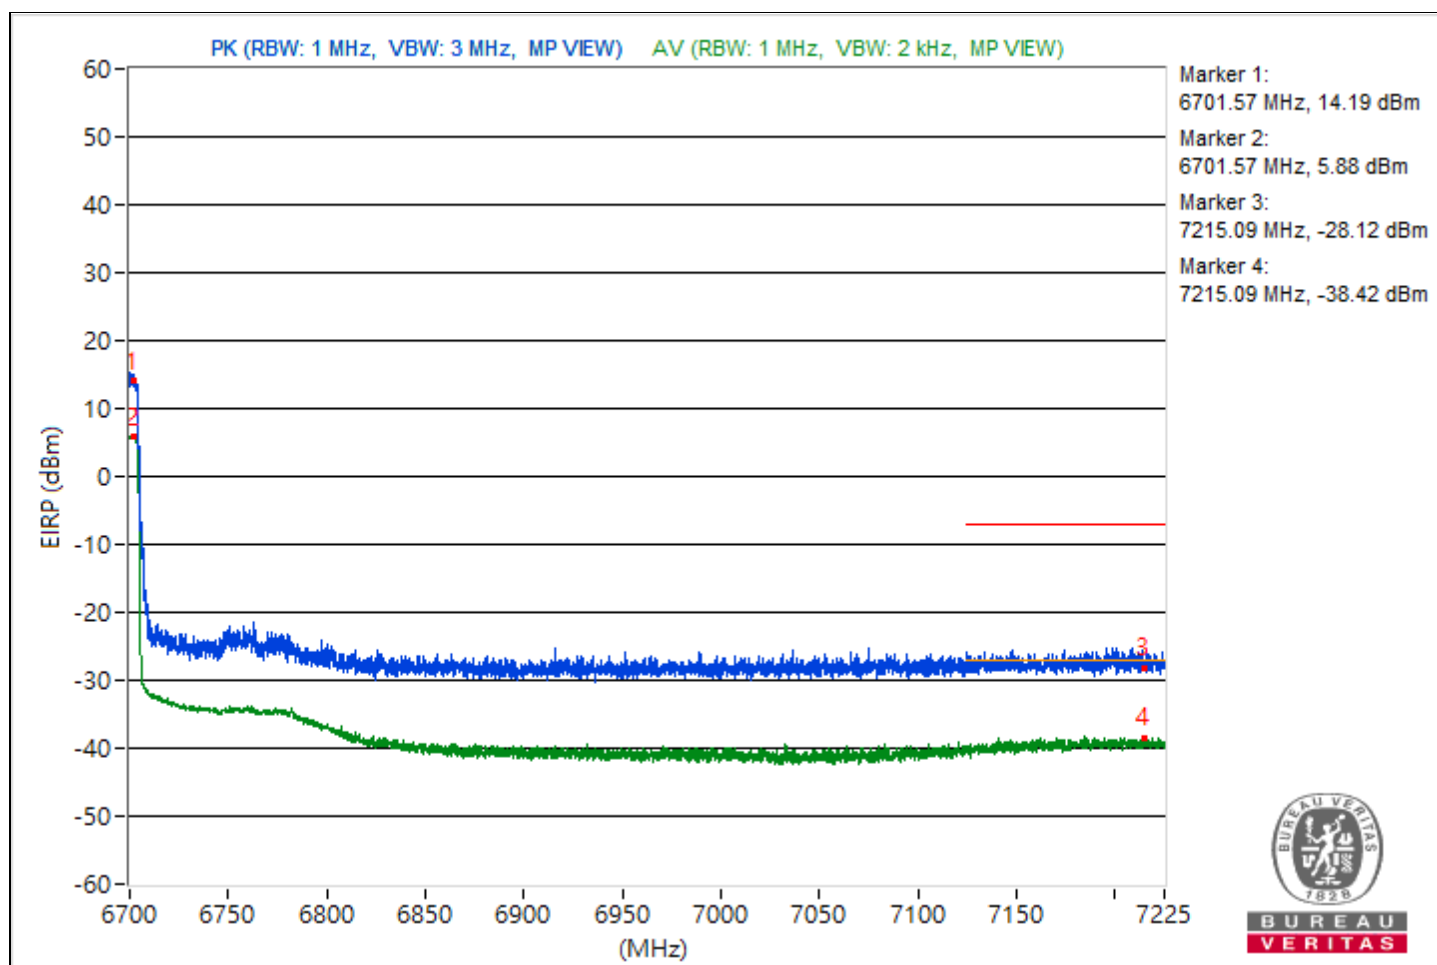


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.55	110.78 PK			3.48	4.71	8.37	15.52
2	*6022.55	103.76 AV			-2.84	-2.91	8.37	8.5
3	#5924	74.65 PK	88.26	-13.61	-32.7	-31.39	8.37	-20.61
4	#5924	65.7 AV	68.26	-2.56	-41.04	-40.84	8.37	-29.56

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

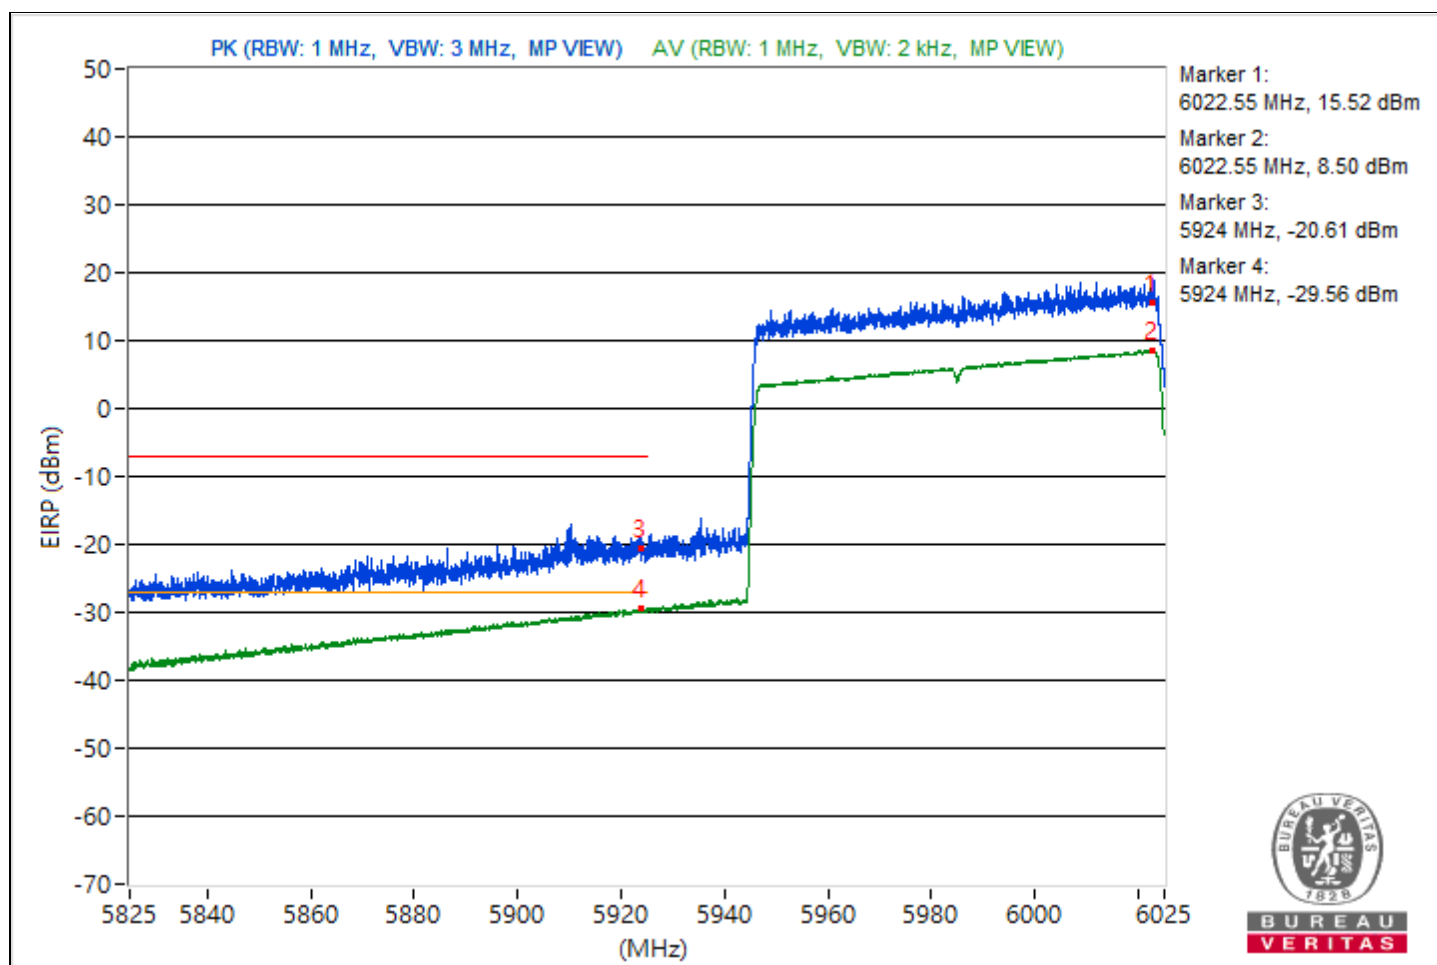


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6700	109.57 PK			2.52	3.31	8.37	14.31
2	*6700	100.66 AV			-5.68	-6.31	8.37	5.4
3	#7206.82	67.63 PK	88.26	-20.63	-40.13	-38.11	8.37	-27.63
4	#7206.82	56.73 AV	68.26	-11.53	-48.97	-51.11	8.37	-38.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

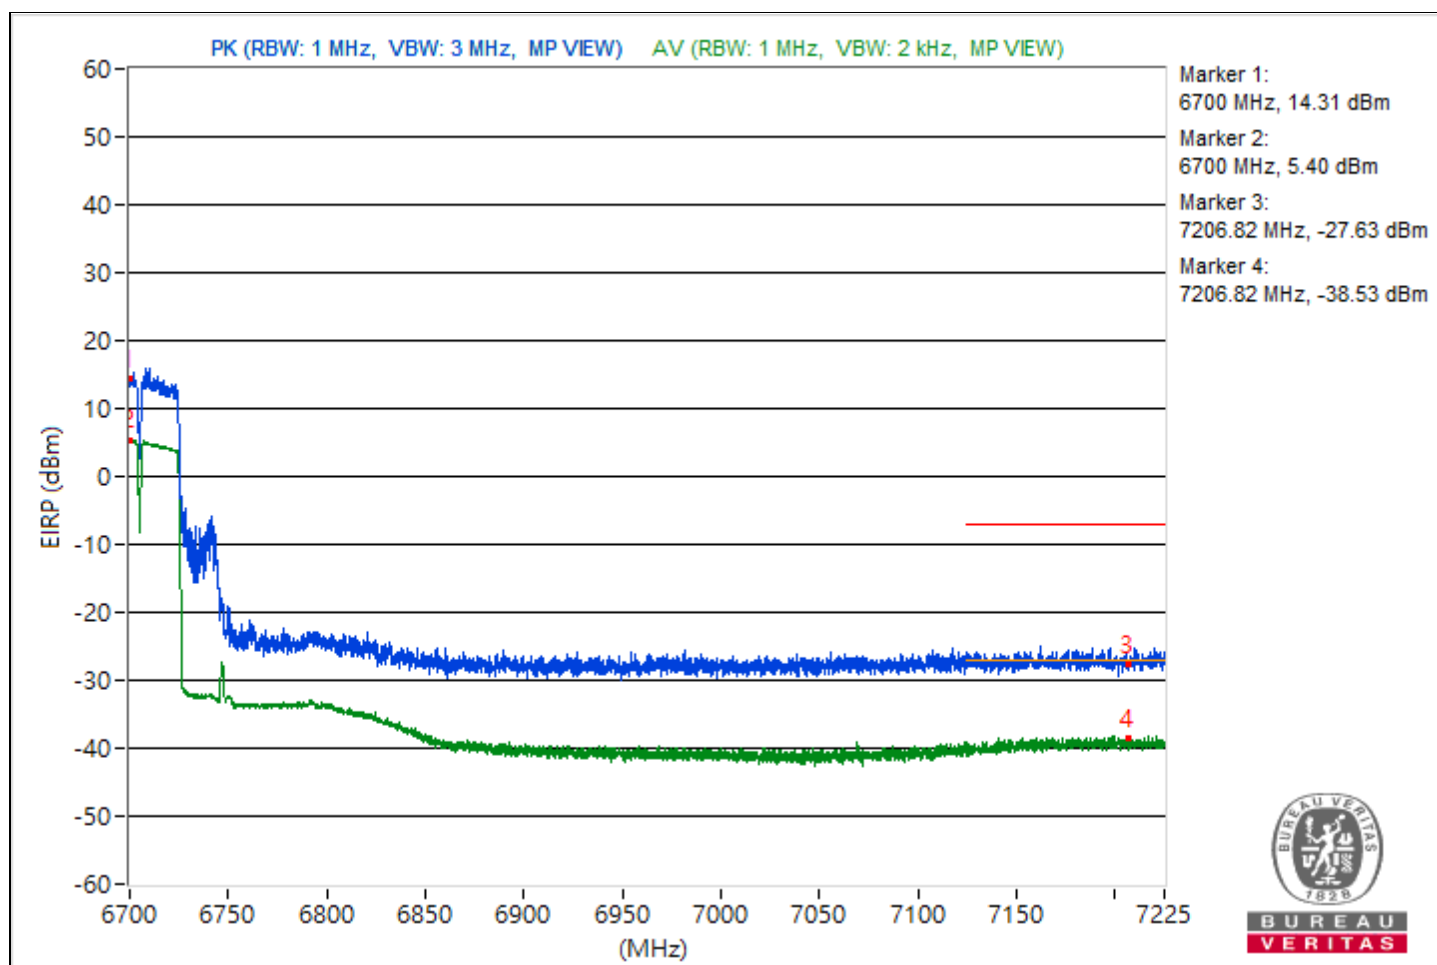

Mode B

1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.9 PK	74.0	-24.1	3.06 H	74	37.7	12.2
2	11910.00	38.0 AV	54.0	-16.0	3.06 H	74	25.8	12.2
3	17865.00	53.2 PK	74.0	-20.8	1.57 H	192	31.4	21.8
4	17865.00	41.6 AV	54.0	-12.4	1.57 H	192	19.8	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.0 PK	74.0	-26.0	2.03 V	168	35.8	12.2
2	11910.00	38.8 AV	54.0	-15.2	2.03 V	168	26.6	12.2
3	17865.00	55.0 PK	74.0	-19.0	1.74 V	76	33.2	21.8
4	17865.00	42.2 AV	54.0	-11.8	1.74 V	76	20.4	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	50.5 PK	74.0	-23.5	3.10 H	78	38.1	12.4
2	12350.00	38.3 AV	54.0	-15.7	3.10 H	78	25.9	12.4
3	18525.00	53.1 PK	74.0	-20.9	1.60 H	197	57.8	-4.7
4	18525.00	41.3 AV	54.0	-12.7	1.60 H	197	46.0	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.7 PK	74.0	-26.3	2.06 V	164	35.3	12.4
2	12350.00	38.4 AV	54.0	-15.6	2.06 V	164	26.0	12.4
3	18525.00	54.5 PK	74.0	-19.5	1.70 V	82	59.2	-4.7
4	18525.00	41.9 AV	54.0	-12.1	1.70 V	82	46.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.8 PK	88.2	-38.4	3.02 H	84	36.7	13.1
2	#12830.00	37.6 AV	68.2	-30.6	3.02 H	84	24.5	13.1
3	19245.00	53.3 PK	74.0	-20.7	1.58 H	180	57.3	-4.0
4	19245.00	41.6 AV	54.0	-12.4	1.58 H	180	45.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.0 PK	88.2	-40.2	1.99 V	178	34.9	13.1
2	#12830.00	38.6 AV	68.2	-29.6	1.99 V	178	25.5	13.1
3	19245.00	55.2 PK	74.0	-18.8	1.80 V	69	59.2	-4.0
4	19245.00	42.7 AV	54.0	-11.3	1.80 V	69	46.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.5 PK	88.2	-38.7	3.05 H	61	36.2	13.3
2	#13070.00	37.6 AV	68.2	-30.6	3.05 H	61	24.3	13.3
3	19605.00	53.1 PK	74.0	-20.9	1.61 H	191	57.1	-4.0
4	19605.00	41.2 AV	54.0	-12.8	1.61 H	191	45.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.0 PK	88.2	-40.2	2.03 V	174	34.7	13.3
2	#13070.00	38.9 AV	68.2	-29.3	2.03 V	174	25.6	13.3
3	19605.00	54.9 PK	74.0	-19.1	1.74 V	74	58.9	-4.0
4	19605.00	41.9 AV	54.0	-12.1	1.74 V	74	45.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.9 PK	74.0	-24.1	3.05 H	71	35.8	14.1
2	13390.00	37.9 AV	54.0	-16.1	3.05 H	71	23.8	14.1
3	20085.00	52.6 PK	74.0	-21.4	1.51 H	177	56.0	-3.4
4	20085.00	41.1 AV	54.0	-12.9	1.51 H	177	44.5	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.4 PK	74.0	-25.6	1.98 V	182	34.3	14.1
2	13390.00	39.3 AV	54.0	-14.7	1.98 V	182	25.2	14.1
3	20085.00	55.2 PK	74.0	-18.8	1.78 V	87	58.6	-3.4
4	20085.00	42.2 AV	54.0	-11.8	1.78 V	87	45.6	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	50.5 PK	88.2	-37.7	3.09 H	60	35.3	15.2
2	#13710.00	38.5 AV	68.2	-29.7	3.09 H	60	23.3	15.2
3	20565.00	53.0 PK	74.0	-21.0	1.55 H	176	56.2	-3.2
4	20565.00	41.1 AV	54.0	-12.9	1.55 H	176	44.3	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.1 PK	88.2	-40.1	2.03 V	182	32.9	15.2
2	#13710.00	39.1 AV	68.2	-29.1	2.03 V	182	23.9	15.2
3	20565.00	55.0 PK	74.0	-19.0	1.70 V	76	58.2	-3.2
4	20565.00	42.1 AV	54.0	-11.9	1.70 V	76	45.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

1S1T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.7 PK	74.0	-24.3	3.07 H	37	37.5	12.2
2	11910.00	39.1 AV	54.0	-14.9	3.07 H	37	26.9	12.2
3	17865.00	52.3 PK	74.0	-21.7	1.75 H	192	30.5	21.8
4	17865.00	42.5 AV	54.0	-11.5	1.75 H	192	20.7	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.2 PK	74.0	-25.8	1.97 V	157	36.0	12.2
2	11910.00	39.2 AV	54.0	-14.8	1.97 V	157	27.0	12.2
3	17865.00	55.5 PK	74.0	-18.5	1.80 V	84	33.7	21.8
4	17865.00	42.5 AV	54.0	-11.5	1.80 V	84	20.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	50.2 PK	74.0	-23.8	3.08 H	45	37.8	12.4
2	12350.00	39.3 AV	54.0	-14.7	3.08 H	45	26.9	12.4
3	18525.00	52.0 PK	74.0	-22.0	1.70 H	190	56.7	-4.7
4	18525.00	42.4 AV	54.0	-11.6	1.70 H	190	47.1	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.9 PK	74.0	-26.1	2.02 V	158	35.5	12.4
2	12350.00	38.7 AV	54.0	-15.3	2.02 V	158	26.3	12.4
3	18525.00	54.7 PK	74.0	-19.3	1.73 V	77	59.4	-4.7
4	18525.00	41.9 AV	54.0	-12.1	1.73 V	77	46.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	50.0 PK	88.2	-38.2	3.07 H	42	36.9	13.1
2	#12830.00	39.2 AV	68.2	-29.0	3.07 H	42	26.1	13.1
3	19245.00	52.3 PK	74.0	-21.7	1.78 H	205	56.3	-4.0
4	19245.00	42.6 AV	54.0	-11.4	1.78 H	205	46.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.5 PK	88.2	-39.7	1.97 V	153	35.4	13.1
2	#12830.00	39.2 AV	68.2	-29.0	1.97 V	153	26.1	13.1
3	19245.00	54.9 PK	74.0	-19.1	1.70 V	92	58.9	-4.0
4	19245.00	41.9 AV	54.0	-12.1	1.70 V	92	45.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.6 PK	88.2	-38.6	3.07 H	26	36.3	13.3
2	#13070.00	38.7 AV	68.2	-29.5	3.07 H	26	25.4	13.3
3	19605.00	51.8 PK	74.0	-22.2	1.74 H	207	55.8	-4.0
4	19605.00	42.2 AV	54.0	-11.8	1.74 H	207	46.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.3 PK	88.2	-39.9	2.04 V	153	35.0	13.3
2	#13070.00	38.9 AV	68.2	-29.3	2.04 V	153	25.6	13.3
3	19605.00	55.0 PK	74.0	-19.0	1.69 V	85	59.0	-4.0
4	19605.00	42.4 AV	54.0	-11.6	1.69 V	85	46.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.8 PK	74.0	-24.2	3.03 H	50	35.7	14.1
2	13390.00	39.1 AV	54.0	-14.9	3.03 H	50	25.0	14.1
3	20085.00	52.8 PK	74.0	-21.2	1.76 H	188	56.2	-3.4
4	20085.00	42.7 AV	54.0	-11.3	1.76 H	188	46.1	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.1 PK	74.0	-25.9	1.99 V	167	34.0	14.1
2	13390.00	38.7 AV	54.0	-15.3	1.99 V	167	24.6	14.1
3	20085.00	55.0 PK	74.0	-19.0	1.73 V	80	58.4	-3.4
4	20085.00	42.4 AV	54.0	-11.6	1.73 V	80	45.8	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.7 PK	88.2	-38.5	3.02 H	41	34.5	15.2
2	#13710.00	39.2 AV	68.2	-29.0	3.02 H	41	24.0	15.2
3	20565.00	52.3 PK	74.0	-21.7	1.69 H	198	55.5	-3.2
4	20565.00	42.4 AV	54.0	-11.6	1.69 H	198	45.6	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.3 PK	88.2	-40.9	2.05 V	183	32.1	15.2
2	#13710.00	38.3 AV	68.2	-29.9	2.05 V	183	23.1	15.2
3	20565.00	54.6 PK	74.0	-19.4	1.76 V	77	57.8	-3.2
4	20565.00	41.7 AV	54.0	-12.3	1.76 V	77	44.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	49.7 PK	74.0	-24.3	3.12 H	36	37.5	12.2
2	11930.00	39.2 AV	54.0	-14.8	3.12 H	36	27.0	12.2
3	17895.00	52.7 PK	74.0	-21.3	1.73 H	195	30.4	22.3
4	17895.00	42.9 AV	54.0	-11.1	1.73 H	195	20.6	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	48.4 PK	74.0	-25.6	1.99 V	179	36.2	12.2
2	11930.00	38.9 AV	54.0	-15.1	1.99 V	179	26.7	12.2
3	17895.00	55.0 PK	74.0	-19.0	1.76 V	80	32.7	22.3
4	17895.00	42.3 AV	54.0	-11.7	1.76 V	80	20.0	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	49.6 PK	74.0	-24.4	3.01 H	28	37.2	12.4
2	12330.00	39.1 AV	54.0	-14.9	3.01 H	28	26.7	12.4
3	18495.00	52.2 PK	74.0	-21.8	1.71 H	206	56.9	-4.7
4	18495.00	42.5 AV	54.0	-11.5	1.71 H	206	47.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	48.3 PK	74.0	-25.7	1.99 V	155	35.9	12.4
2	12330.00	39.2 AV	54.0	-14.8	1.99 V	155	26.8	12.4
3	18495.00	55.3 PK	74.0	-18.7	1.74 V	87	60.0	-4.7
4	18495.00	42.7 AV	54.0	-11.3	1.74 V	87	47.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	49.6 PK	88.2	-38.6	3.03 H	22	36.5	13.1
2	#12810.00	39.1 AV	68.2	-29.1	3.03 H	22	26.0	13.1
3	19215.00	51.9 PK	74.0	-22.1	1.79 H	202	56.1	-4.2
4	19215.00	42.3 AV	54.0	-11.7	1.79 H	202	46.5	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.4 PK	88.2	-39.8	2.04 V	170	35.3	13.1
2	#12810.00	39.0 AV	68.2	-29.2	2.04 V	170	25.9	13.1
3	19215.00	55.0 PK	74.0	-19.0	1.79 V	67	59.2	-4.2
4	19215.00	42.0 AV	54.0	-12.0	1.79 V	67	46.2	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	49.5 PK	88.2	-38.7	3.06 H	31	36.1	13.4
2	#13130.00	38.8 AV	68.2	-29.4	3.06 H	31	25.4	13.4
3	19695.00	52.5 PK	74.0	-21.5	1.75 H	182	56.5	-4.0
4	19695.00	42.4 AV	54.0	-11.6	1.75 H	182	46.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	47.5 PK	88.2	-40.7	1.98 V	161	34.1	13.4
2	#13130.00	38.5 AV	68.2	-29.7	1.98 V	161	25.1	13.4
3	19695.00	55.0 PK	74.0	-19.0	1.75 V	71	59.0	-4.0
4	19695.00	42.0 AV	54.0	-12.0	1.75 V	71	46.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	50.2 PK	88.2	-38.0	3.03 H	43	35.8	14.4
2	#13450.00	39.4 AV	68.2	-28.8	3.03 H	43	25.0	14.4
3	20175.00	52.4 PK	74.0	-21.6	1.79 H	182	55.6	-3.2
4	20175.00	42.5 AV	54.0	-11.5	1.79 H	182	45.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	47.6 PK	88.2	-40.6	2.05 V	167	33.2	14.4
2	#13450.00	38.4 AV	68.2	-29.8	2.05 V	167	24.0	14.4
3	20175.00	55.1 PK	74.0	-18.9	1.68 V	78	58.3	-3.2
4	20175.00	42.4 AV	54.0	-11.6	1.68 V	78	45.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	49.6 PK	88.2	-38.6	3.11 H	21	34.3	15.3
2	#13690.00	39.2 AV	68.2	-29.0	3.11 H	21	23.9	15.3
3	20535.00	52.3 PK	74.0	-21.7	1.75 H	202	55.5	-3.2
4	20535.00	42.4 AV	54.0	-11.6	1.75 H	202	45.6	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	47.8 PK	88.2	-40.4	2.01 V	174	32.5	15.3
2	#13690.00	38.8 AV	68.2	-29.4	2.01 V	174	23.5	15.3
3	20535.00	55.6 PK	74.0	-18.4	1.80 V	64	58.8	-3.2
4	20535.00	42.6 AV	54.0	-11.4	1.80 V	64	45.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	50.3 PK	74.0	-23.7	3.04 H	40	38.1	12.2
2	11970.00	39.6 AV	54.0	-14.4	3.04 H	40	27.4	12.2
3	17955.00	52.3 PK	74.0	-21.7	1.79 H	180	29.1	23.2
4	17955.00	42.8 AV	54.0	-11.2	1.79 H	180	19.6	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.1 PK	74.0	-25.9	2.01 V	171	35.9	12.2
2	11970.00	38.7 AV	54.0	-15.3	2.01 V	171	26.5	12.2
3	17955.00	55.5 PK	74.0	-18.5	1.76 V	77	32.3	23.2
4	17955.00	42.5 AV	54.0	-11.5	1.76 V	77	19.3	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	49.7 PK	74.0	-24.3	3.01 H	52	37.2	12.5
2	12290.00	39.1 AV	54.0	-14.9	3.01 H	52	26.6	12.5
3	18435.00	52.5 PK	74.0	-21.5	1.77 H	184	57.4	-4.9
4	18435.00	42.4 AV	54.0	-11.6	1.77 H	184	47.3	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	48.2 PK	74.0	-25.8	1.99 V	169	35.7	12.5
2	12290.00	39.3 AV	54.0	-14.7	1.99 V	169	26.8	12.5
3	18435.00	54.7 PK	74.0	-19.3	1.80 V	76	59.6	-4.9
4	18435.00	42.2 AV	54.0	-11.8	1.80 V	76	47.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	50.2 PK	88.2	-38.0	3.05 H	51	37.1	13.1
2	#12770.00	39.5 AV	68.2	-28.7	3.05 H	51	26.4	13.1
3	19155.00	51.5 PK	74.0	-22.5	1.80 H	182	55.7	-4.2
4	19155.00	42.0 AV	54.0	-12.0	1.80 H	182	46.2	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.6 PK	88.2	-39.6	2.05 V	175	35.5	13.1
2	#12770.00	39.2 AV	68.2	-29.0	2.05 V	175	26.1	13.1
3	19155.00	54.9 PK	74.0	-19.1	1.80 V	75	59.1	-4.2
4	19155.00	42.1 AV	54.0	-11.9	1.80 V	75	46.3	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	49.4 PK	74.0	-24.6	3.01 H	27	35.9	13.5
2	13250.00	38.9 AV	54.0	-15.1	3.01 H	27	25.4	13.5
3	19875.00	52.5 PK	74.0	-21.5	1.80 H	194	56.3	-3.8
4	19875.00	42.5 AV	54.0	-11.5	1.80 H	194	46.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	48.5 PK	74.0	-25.5	2.01 V	175	35.0	13.5
2	13250.00	39.2 AV	54.0	-14.8	2.01 V	175	25.7	13.5
3	19875.00	55.0 PK	74.0	-19.0	1.79 V	72	58.8	-3.8
4	19875.00	42.1 AV	54.0	-11.9	1.79 V	72	45.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	49.3 PK	88.2	-38.9	3.05 H	17	35.1	14.2
2	#13410.00	38.9 AV	68.2	-29.3	3.05 H	17	24.7	14.2
3	20115.00	52.8 PK	74.0	-21.2	1.76 H	183	56.0	-3.2
4	20115.00	42.7 AV	54.0	-11.3	1.76 H	183	45.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.2 PK	88.2	-40.0	2.05 V	167	34.0	14.2
2	#13410.00	39.0 AV	68.2	-29.2	2.05 V	167	24.8	14.2
3	20115.00	55.4 PK	74.0	-18.6	1.68 V	70	58.6	-3.2
4	20115.00	42.7 AV	54.0	-11.3	1.68 V	70	45.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	48.7 PK	88.2	-39.5	2.99 H	24	33.8	14.9
2	#13570.00	38.5 AV	68.2	-29.7	2.99 H	24	23.6	14.9
3	20355.00	53.0 PK	74.0	-21.0	1.82 H	178	55.9	-2.9
4	20355.00	42.9 AV	54.0	-11.1	1.82 H	178	45.8	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	47.6 PK	88.2	-40.6	2.04 V	180	32.7	14.9
2	#13570.00	38.5 AV	68.2	-29.7	2.04 V	180	23.6	14.9
3	20355.00	54.6 PK	74.0	-19.4	1.69 V	66	57.5	-2.9
4	20355.00	41.9 AV	54.0	-12.1	1.69 V	66	44.8	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	49.3 PK	74.0	-24.7	3.05 H	26	36.8	12.5
2	12050.00	38.9 AV	54.0	-15.1	3.05 H	26	26.4	12.5
3	18075.00	52.6 PK	74.0	-21.4	1.83 H	198	57.1	-4.5
4	18075.00	42.6 AV	54.0	-11.4	1.83 H	198	47.1	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.9 PK	74.0	-26.1	2.05 V	154	35.4	12.5
2	12050.00	38.7 AV	54.0	-15.3	2.05 V	154	26.2	12.5
3	18075.00	55.8 PK	74.0	-18.2	1.71 V	87	60.3	-4.5
4	18075.00	42.7 AV	54.0	-11.3	1.71 V	87	47.2	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.8 PK	74.0	-25.2	2.95 H	33	36.4	12.4
2	12370.00	38.4 AV	54.0	-15.6	2.95 H	33	26.0	12.4
3	18555.00	52.7 PK	74.0	-21.3	1.84 H	182	57.2	-4.5
4	18555.00	42.6 AV	54.0	-11.4	1.84 H	182	47.1	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	47.7 PK	74.0	-26.3	2.08 V	169	35.3	12.4
2	12370.00	38.7 AV	54.0	-15.3	2.08 V	169	26.3	12.4
3	18555.00	55.6 PK	74.0	-18.4	1.69 V	89	60.1	-4.5
4	18555.00	42.6 AV	54.0	-11.4	1.69 V	89	47.1	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.9 PK	74.0	-25.1	2.98 H	19	35.9	13.0
2	12690.00	38.6 AV	54.0	-15.4	2.98 H	19	25.6	13.0
3	19035.00	52.7 PK	74.0	-21.3	1.82 H	210	56.8	-4.1
4	19035.00	42.5 AV	54.0	-11.5	1.82 H	210	46.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.1 PK	74.0	-25.9	1.97 V	159	35.1	13.0
2	12690.00	38.9 AV	54.0	-15.1	1.97 V	159	25.9	13.0
3	19035.00	54.6 PK	74.0	-19.4	1.71 V	62	58.7	-4.1
4	19035.00	42.1 AV	54.0	-11.9	1.71 V	62	46.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.4 PK	74.0	-24.6	2.99 H	37	35.6	13.8
2	13330.00	38.9 AV	54.0	-15.1	2.99 H	37	25.1	13.8
3	19995.00	52.5 PK	74.0	-21.5	1.79 H	182	56.3	-3.8
4	19995.00	42.2 AV	54.0	-11.8	1.79 H	182	46.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.4 PK	74.0	-25.6	2.09 V	170	34.6	13.8
2	13330.00	39.0 AV	54.0	-15.0	2.09 V	170	25.2	13.8
3	19995.00	55.2 PK	74.0	-18.8	1.72 V	86	59.0	-3.8
4	19995.00	42.3 AV	54.0	-11.7	1.72 V	86	46.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.9 PK	74.0	-26.1	2.98 H	49	35.7	12.2
2	11910.00	37.4 AV	54.0	-16.6	2.98 H	49	25.2	12.2
3	17865.00	54.4 PK	74.0	-19.6	1.64 H	228	32.6	21.8
4	17865.00	43.5 AV	54.0	-10.5	1.64 H	228	21.7	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.4 PK	74.0	-26.6	2.04 V	152	35.2	12.2
2	11910.00	37.5 AV	54.0	-16.5	2.04 V	152	25.3	12.2
3	17865.00	51.9 PK	74.0	-22.1	1.63 V	79	30.1	21.8
4	17865.00	42.3 AV	54.0	-11.7	1.63 V	79	20.5	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.8 PK	88.2	-40.4	2.96 H	46	34.7	13.1
2	#12830.00	37.2 AV	68.2	-31.0	2.96 H	46	24.1	13.1
3	19245.00	53.7 PK	74.0	-20.3	1.70 H	244	57.7	-4.0
4	19245.00	42.7 AV	54.0	-11.3	1.70 H	244	46.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.2 PK	88.2	-41.0	1.99 V	172	34.1	13.1
2	#12830.00	37.4 AV	68.2	-30.8	1.99 V	172	24.3	13.1
3	19245.00	51.3 PK	74.0	-22.7	1.61 V	90	55.3	-4.0
4	19245.00	41.7 AV	54.0	-12.3	1.61 V	90	45.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.8 PK	88.2	-39.4	2.92 H	73	35.5	13.3
2	#13070.00	37.8 AV	68.2	-30.4	2.92 H	73	24.5	13.3
3	19605.00	54.1 PK	74.0	-19.9	1.61 H	217	58.1	-4.0
4	19605.00	43.2 AV	54.0	-10.8	1.61 H	217	47.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.7 PK	88.2	-41.5	2.10 V	156	33.4	13.3
2	#13070.00	36.8 AV	68.2	-31.4	2.10 V	156	23.5	13.3
3	19605.00	50.8 PK	74.0	-23.2	1.56 V	62	54.8	-4.0
4	19605.00	41.6 AV	54.0	-12.4	1.56 V	62	45.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.5 PK	88.2	-39.7	2.93 H	57	33.3	15.2
2	#13710.00	37.4 AV	68.2	-30.8	2.93 H	57	22.2	15.2
3	20565.00	53.5 PK	74.0	-20.5	1.66 H	234	56.7	-3.2
4	20565.00	42.6 AV	54.0	-11.4	1.66 H	234	45.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.1 PK	88.2	-41.1	2.03 V	155	31.9	15.2
2	#13710.00	37.2 AV	68.2	-31.0	2.03 V	155	22.0	15.2
3	20565.00	51.9 PK	74.0	-22.1	1.57 V	78	55.1	-3.2
4	20565.00	42.3 AV	54.0	-11.7	1.57 V	78	45.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.6 PK	74.0	-25.4	2.96 H	77	36.4	12.2
2	11910.00	37.6 AV	54.0	-16.4	2.96 H	77	25.4	12.2
3	17865.00	54.5 PK	74.0	-19.5	1.71 H	228	32.7	21.8
4	17865.00	43.6 AV	54.0	-10.4	1.71 H	228	21.8	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.5 PK	74.0	-27.5	2.09 V	150	34.3	12.2
2	11910.00	36.5 AV	54.0	-17.5	2.09 V	150	24.3	12.2
3	17865.00	51.1 PK	74.0	-22.9	1.56 V	77	29.3	21.8
4	17865.00	41.8 AV	54.0	-12.2	1.56 V	77	20.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.1 PK	88.2	-40.1	2.96 H	68	35.0	13.1
2	#12830.00	37.4 AV	68.2	-30.8	2.96 H	68	24.3	13.1
3	19245.00	53.6 PK	74.0	-20.4	1.64 H	240	57.6	-4.0
4	19245.00	43.0 AV	54.0	-11.0	1.64 H	240	47.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.6 PK	88.2	-41.6	2.03 V	172	33.5	13.1
2	#12830.00	36.7 AV	68.2	-31.5	2.03 V	172	23.6	13.1
3	19245.00	51.1 PK	74.0	-22.9	1.56 V	76	55.1	-4.0
4	19245.00	41.9 AV	54.0	-12.1	1.56 V	76	45.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.3 PK	88.2	-39.9	2.92 H	51	35.0	13.3
2	#13070.00	37.3 AV	68.2	-30.9	2.92 H	51	24.0	13.3
3	19605.00	53.9 PK	74.0	-20.1	1.71 H	218	57.9	-4.0
4	19605.00	43.3 AV	54.0	-10.7	1.71 H	218	47.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.0 PK	88.2	-41.2	2.05 V	166	33.7	13.3
2	#13070.00	37.0 AV	68.2	-31.2	2.05 V	166	23.7	13.3
3	19605.00	50.7 PK	74.0	-23.3	1.65 V	85	54.7	-4.0
4	19605.00	41.3 AV	54.0	-12.7	1.65 V	85	45.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.0 PK	88.2	-39.2	2.93 H	62	33.8	15.2
2	#13710.00	37.9 AV	68.2	-30.3	2.93 H	62	22.7	15.2
3	20565.00	54.0 PK	74.0	-20.0	1.70 H	245	57.2	-3.2
4	20565.00	42.9 AV	54.0	-11.1	1.70 H	245	46.1	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.2 PK	88.2	-41.0	2.03 V	157	32.0	15.2
2	#13710.00	37.4 AV	68.2	-30.8	2.03 V	157	22.2	15.2
3	20565.00	50.7 PK	74.0	-23.3	1.64 V	76	53.9	-3.2
4	20565.00	41.3 AV	54.0	-12.7	1.64 V	76	44.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.8 PK	74.0	-26.2	2.89 H	59	35.6	12.2
2	11910.00	37.3 AV	54.0	-16.7	2.89 H	59	25.1	12.2
3	17865.00	53.5 PK	74.0	-20.5	1.68 H	243	31.7	21.8
4	17865.00	42.8 AV	54.0	-11.2	1.68 H	243	21.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.5 PK	74.0	-27.5	2.03 V	179	34.3	12.2
2	11910.00	36.8 AV	54.0	-17.2	2.03 V	179	24.6	12.2
3	17865.00	50.5 PK	74.0	-23.5	1.64 V	81	28.7	21.8
4	17865.00	41.4 AV	54.0	-12.6	1.64 V	81	19.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.3 PK	88.2	-39.9	2.91 H	51	35.2	13.1
2	#12830.00	37.3 AV	68.2	-30.9	2.91 H	51	24.2	13.1
3	19245.00	53.4 PK	74.0	-20.6	1.72 H	219	57.4	-4.0
4	19245.00	42.7 AV	54.0	-11.3	1.72 H	219	46.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.9 PK	88.2	-41.3	2.03 V	179	33.8	13.1
2	#12830.00	36.8 AV	68.2	-31.4	2.03 V	179	23.7	13.1
3	19245.00	50.9 PK	74.0	-23.1	1.65 V	61	54.9	-4.0
4	19245.00	41.6 AV	54.0	-12.4	1.65 V	61	45.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.4 PK	88.2	-39.8	2.90 H	50	35.1	13.3
2	#13070.00	37.4 AV	68.2	-30.8	2.90 H	50	24.1	13.3
3	19605.00	53.6 PK	74.0	-20.4	1.70 H	235	57.6	-4.0
4	19605.00	42.7 AV	54.0	-11.3	1.70 H	235	46.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.6 PK	88.2	-41.6	2.03 V	168	33.3	13.3
2	#13070.00	36.7 AV	68.2	-31.5	2.03 V	168	23.4	13.3
3	19605.00	50.5 PK	74.0	-23.5	1.58 V	63	54.5	-4.0
4	19605.00	41.4 AV	54.0	-12.6	1.58 V	63	45.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.1 PK	88.2	-40.1	2.93 H	56	32.9	15.2
2	#13710.00	37.4 AV	68.2	-30.8	2.93 H	56	22.2	15.2
3	20565.00	54.0 PK	74.0	-20.0	1.73 H	217	57.2	-3.2
4	20565.00	43.2 AV	54.0	-10.8	1.73 H	217	46.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.2 PK	88.2	-41.0	2.06 V	178	32.0	15.2
2	#13710.00	37.2 AV	68.2	-31.0	2.06 V	178	22.0	15.2
3	20565.00	50.9 PK	74.0	-23.1	1.55 V	79	54.1	-3.2
4	20565.00	41.5 AV	54.0	-12.5	1.55 V	79	44.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.7 PK	74.0	-25.3	2.99 H	68	36.5	12.2
2	11910.00	38.0 AV	54.0	-16.0	2.99 H	68	25.8	12.2
3	17865.00	54.0 PK	74.0	-20.0	1.66 H	231	32.2	21.8
4	17865.00	43.1 AV	54.0	-10.9	1.66 H	231	21.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.4 PK	74.0	-27.6	2.00 V	179	34.2	12.2
2	11910.00	36.7 AV	54.0	-17.3	2.00 V	179	24.5	12.2
3	17865.00	51.6 PK	74.0	-22.4	1.56 V	60	29.8	21.8
4	17865.00	42.1 AV	54.0	-11.9	1.56 V	60	20.3	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.8 PK	88.2	-40.4	2.92 H	68	34.7	13.1
2	#12830.00	37.2 AV	68.2	-31.0	2.92 H	68	24.1	13.1
3	19245.00	54.1 PK	74.0	-19.9	1.66 H	217	58.1	-4.0
4	19245.00	43.3 AV	54.0	-10.7	1.66 H	217	47.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.8 PK	88.2	-41.4	2.06 V	173	33.7	13.1
2	#12830.00	37.1 AV	68.2	-31.1	2.06 V	173	24.0	13.1
3	19245.00	51.8 PK	74.0	-22.2	1.66 V	80	55.8	-4.0
4	19245.00	42.2 AV	54.0	-11.8	1.66 V	80	46.2	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.2 PK	88.2	-40.0	2.98 H	65	34.9	13.3
2	#13070.00	37.7 AV	68.2	-30.5	2.98 H	65	24.4	13.3
3	19605.00	53.3 PK	74.0	-20.7	1.61 H	215	57.3	-4.0
4	19605.00	42.7 AV	54.0	-11.3	1.61 H	215	46.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.2 PK	88.2	-41.0	2.06 V	170	33.9	13.3
2	#13070.00	37.2 AV	68.2	-31.0	2.06 V	170	23.9	13.3
3	19605.00	51.4 PK	74.0	-22.6	1.65 V	75	55.4	-4.0
4	19605.00	41.8 AV	54.0	-12.2	1.65 V	75	45.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.6 PK	88.2	-39.6	2.93 H	77	33.4	15.2
2	#13710.00	37.7 AV	68.2	-30.5	2.93 H	77	22.5	15.2
3	20565.00	53.4 PK	74.0	-20.6	1.62 H	241	56.6	-3.2
4	20565.00	42.7 AV	54.0	-11.3	1.62 H	241	45.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.0 PK	88.2	-41.2	2.10 V	152	31.8	15.2
2	#13710.00	37.1 AV	68.2	-31.1	2.10 V	152	21.9	15.2
3	20565.00	51.8 PK	74.0	-22.2	1.57 V	68	55.0	-3.2
4	20565.00	42.2 AV	54.0	-11.8	1.57 V	68	45.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.7 PK	74.0	-25.3	2.89 H	55	36.5	12.2
2	11910.00	37.8 AV	54.0	-16.2	2.89 H	55	25.6	12.2
3	17865.00	53.7 PK	74.0	-20.3	1.67 H	229	31.9	21.8
4	17865.00	43.0 AV	54.0	-11.0	1.67 H	229	21.2	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.3 PK	74.0	-27.7	2.08 V	176	34.1	12.2
2	11910.00	36.5 AV	54.0	-17.5	2.08 V	176	24.3	12.2
3	17865.00	51.0 PK	74.0	-23.0	1.58 V	86	29.2	21.8
4	17865.00	41.8 AV	54.0	-12.2	1.58 V	86	20.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.8 PK	88.2	-39.4	2.95 H	49	35.7	13.1
2	#12830.00	37.8 AV	68.2	-30.4	2.95 H	49	24.7	13.1
3	19245.00	54.3 PK	74.0	-19.7	1.67 H	231	58.3	-4.0
4	19245.00	43.5 AV	54.0	-10.5	1.67 H	231	47.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.7 PK	88.2	-41.5	2.08 V	181	33.6	13.1
2	#12830.00	36.6 AV	68.2	-31.6	2.08 V	181	23.5	13.1
3	19245.00	51.6 PK	74.0	-22.4	1.55 V	76	55.6	-4.0
4	19245.00	42.1 AV	54.0	-11.9	1.55 V	76	46.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.7 PK	88.2	-39.5	2.98 H	59	35.4	13.3
2	#13070.00	37.9 AV	68.2	-30.3	2.98 H	59	24.6	13.3
3	19605.00	53.7 PK	74.0	-20.3	1.70 H	224	57.7	-4.0
4	19605.00	43.1 AV	54.0	-10.9	1.70 H	224	47.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.0 PK	88.2	-41.2	2.05 V	168	33.7	13.3
2	#13070.00	37.3 AV	68.2	-30.9	2.05 V	168	24.0	13.3
3	19605.00	51.0 PK	74.0	-23.0	1.64 V	77	55.0	-4.0
4	19605.00	41.8 AV	54.0	-12.2	1.64 V	77	45.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.2 PK	88.2	-40.0	2.91 H	52	33.0	15.2
2	#13710.00	37.2 AV	68.2	-31.0	2.91 H	52	22.0	15.2
3	20565.00	53.9 PK	74.0	-20.1	1.64 H	222	57.1	-3.2
4	20565.00	42.8 AV	54.0	-11.2	1.64 H	222	46.0	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.0 PK	88.2	-41.2	2.08 V	175	31.8	15.2
2	#13710.00	37.1 AV	68.2	-31.1	2.08 V	175	21.9	15.2
3	20565.00	51.0 PK	74.0	-23.0	1.58 V	60	54.2	-3.2
4	20565.00	41.7 AV	54.0	-12.3	1.58 V	60	44.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.7 PK	74.0	-25.3	2.93 H	51	36.5	12.2
2	11970.00	37.7 AV	54.0	-16.3	2.93 H	51	25.5	12.2
3	17955.00	53.7 PK	74.0	-20.3	1.71 H	232	30.5	23.2
4	17955.00	42.7 AV	54.0	-11.3	1.71 H	232	19.5	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	47.5 PK	74.0	-26.5	2.08 V	152	35.3	12.2
2	11970.00	37.4 AV	54.0	-16.6	2.08 V	152	25.2	12.2
3	17955.00	51.0 PK	74.0	-23.0	1.66 V	77	27.8	23.2
4	17955.00	41.4 AV	54.0	-12.6	1.66 V	77	18.2	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.2 PK	88.2	-40.0	2.93 H	73	35.1	13.1
2	#12770.00	37.1 AV	68.2	-31.1	2.93 H	73	24.0	13.1
3	19155.00	53.8 PK	74.0	-20.2	1.69 H	218	58.0	-4.2
4	19155.00	42.9 AV	54.0	-11.1	1.69 H	218	47.1	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	46.8 PK	88.2	-41.4	2.02 V	175	33.7	13.1
2	#12770.00	36.9 AV	68.2	-31.3	2.02 V	175	23.8	13.1
3	19155.00	51.2 PK	74.0	-22.8	1.63 V	68	55.4	-4.2
4	19155.00	41.6 AV	54.0	-12.4	1.63 V	68	45.8	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	48.3 PK	74.0	-25.7	2.93 H	66	34.8	13.5
2	13250.00	37.3 AV	54.0	-16.7	2.93 H	66	23.8	13.5
3	19875.00	53.4 PK	74.0	-20.6	1.63 H	226	57.2	-3.8
4	19875.00	42.7 AV	54.0	-11.3	1.63 H	226	46.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	46.9 PK	74.0	-27.1	2.04 V	153	33.4	13.5
2	13250.00	36.9 AV	54.0	-17.1	2.04 V	153	23.4	13.5
3	19875.00	51.4 PK	74.0	-22.6	1.59 V	67	55.2	-3.8
4	19875.00	41.9 AV	54.0	-12.1	1.59 V	67	45.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	47.8 PK	88.2	-40.4	2.93 H	74	32.9	14.9
2	#13570.00	37.1 AV	68.2	-31.1	2.93 H	74	22.2	14.9
3	20355.00	53.9 PK	74.0	-20.1	1.62 H	234	56.8	-2.9
4	20355.00	43.1 AV	54.0	-10.9	1.62 H	234	46.0	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	46.6 PK	88.2	-41.6	2.04 V	151	31.7	14.9
2	#13570.00	36.9 AV	68.2	-31.3	2.04 V	151	22.0	14.9
3	20355.00	51.3 PK	74.0	-22.7	1.62 V	85	54.2	-2.9
4	20355.00	42.0 AV	54.0	-12.0	1.62 V	85	44.9	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.1 PK	74.0	-25.9	2.91 H	48	35.6	12.5
2	12050.00	37.2 AV	54.0	-16.8	2.91 H	48	24.7	12.5
3	18075.00	54.5 PK	74.0	-19.5	1.69 H	225	59.0	-4.5
4	18075.00	43.4 AV	54.0	-10.6	1.69 H	225	47.9	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.7 PK	74.0	-27.3	2.11 V	167	34.2	12.5
2	12050.00	36.9 AV	54.0	-17.1	2.11 V	167	24.4	12.5
3	18075.00	51.1 PK	74.0	-22.9	1.55 V	81	55.6	-4.5
4	18075.00	41.5 AV	54.0	-12.5	1.55 V	81	46.0	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.7 PK	74.0	-25.3	2.96 H	78	35.7	13.0
2	12690.00	37.9 AV	54.0	-16.1	2.96 H	78	24.9	13.0
3	19035.00	53.4 PK	74.0	-20.6	1.69 H	245	57.5	-4.1
4	19035.00	42.8 AV	54.0	-11.2	1.69 H	245	46.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.2 PK	74.0	-26.8	2.09 V	175	34.2	13.0
2	12690.00	37.1 AV	54.0	-16.9	2.09 V	175	24.1	13.0
3	19035.00	50.9 PK	74.0	-23.1	1.57 V	66	55.0	-4.1
4	19035.00	41.5 AV	54.0	-12.5	1.57 V	66	45.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.1 PK	74.0	-25.9	2.94 H	61	34.3	13.8
2	13330.00	37.3 AV	54.0	-16.7	2.94 H	61	23.5	13.8
3	19995.00	53.5 PK	74.0	-20.5	1.64 H	239	57.3	-3.8
4	19995.00	42.9 AV	54.0	-11.1	1.64 H	239	46.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.8 PK	74.0	-27.2	2.09 V	171	33.0	13.8
2	13330.00	36.7 AV	54.0	-17.3	2.09 V	171	22.9	13.8
3	19995.00	50.7 PK	74.0	-23.3	1.59 V	76	54.5	-3.8
4	19995.00	41.3 AV	54.0	-12.7	1.59 V	76	45.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.8 PK	74.0	-25.2	2.90 H	52	36.3	12.5
2	12050.00	37.9 AV	54.0	-16.1	2.90 H	52	25.4	12.5
3	18075.00	53.7 PK	74.0	-20.3	1.71 H	231	58.2	-4.5
4	18075.00	42.7 AV	54.0	-11.3	1.71 H	231	47.2	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.7 PK	74.0	-27.3	2.10 V	149	34.2	12.5
2	12050.00	37.0 AV	54.0	-17.0	2.10 V	149	24.5	12.5
3	18075.00	50.7 PK	74.0	-23.3	1.65 V	85	55.2	-4.5
4	18075.00	41.5 AV	54.0	-12.5	1.65 V	85	46.0	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.1 PK	74.0	-25.9	2.94 H	63	35.1	13.0
2	12690.00	37.0 AV	54.0	-17.0	2.94 H	63	24.0	13.0
3	19035.00	53.7 PK	74.0	-20.3	1.62 H	243	57.8	-4.1
4	19035.00	42.7 AV	54.0	-11.3	1.62 H	243	46.8	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	46.7 PK	74.0	-27.3	2.02 V	179	33.7	13.0
2	12690.00	36.9 AV	54.0	-17.1	2.02 V	179	23.9	13.0
3	19035.00	51.7 PK	74.0	-22.3	1.57 V	88	55.8	-4.1
4	19035.00	42.1 AV	54.0	-11.9	1.57 V	88	46.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.3 PK	74.0	-25.7	2.95 H	60	34.5	13.8
2	13330.00	37.3 AV	54.0	-16.7	2.95 H	60	23.5	13.8
3	19995.00	54.2 PK	74.0	-19.8	1.65 H	222	58.0	-3.8
4	19995.00	43.6 AV	54.0	-10.4	1.65 H	222	47.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.5 PK	74.0	-26.5	2.11 V	171	33.7	13.8
2	13330.00	37.5 AV	54.0	-16.5	2.11 V	171	23.7	13.8
3	19995.00	51.1 PK	74.0	-22.9	1.64 V	62	54.9	-3.8
4	19995.00	41.8 AV	54.0	-12.2	1.64 V	62	45.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.9 PK	74.0	-24.1	3.06 H	77	37.7	12.2
2	11910.00	38.5 AV	54.0	-15.5	3.06 H	77	26.3	12.2
3	17865.00	53.7 PK	74.0	-20.3	1.60 H	189	31.9	21.8
4	17865.00	42.5 AV	54.0	-11.5	1.60 H	189	20.7	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.6 PK	74.0	-25.4	1.87 V	217	36.4	12.2
2	11910.00	38.9 AV	54.0	-15.1	1.87 V	217	26.7	12.2
3	17865.00	55.9 PK	74.0	-18.1	1.70 V	59	34.1	21.8
4	17865.00	43.5 AV	54.0	-10.5	1.70 V	59	21.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	50.4 PK	74.0	-23.6	3.06 H	72	38.0	12.4
2	12350.00	38.8 AV	54.0	-15.2	3.06 H	72	26.4	12.4
3	18525.00	53.8 PK	74.0	-20.2	1.62 H	192	58.5	-4.7
4	18525.00	42.5 AV	54.0	-11.5	1.62 H	192	47.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.6 PK	74.0	-25.4	1.89 V	196	36.2	12.4
2	12350.00	39.3 AV	54.0	-14.7	1.89 V	196	26.9	12.4
3	18525.00	55.2 PK	74.0	-18.8	1.70 V	80	59.9	-4.7
4	18525.00	43.0 AV	54.0	-11.0	1.70 V	80	47.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	50.1 PK	88.2	-38.1	3.07 H	63	37.0	13.1
2	#12830.00	38.5 AV	68.2	-29.7	3.07 H	63	25.4	13.1
3	19245.00	53.8 PK	74.0	-20.2	1.59 H	188	57.8	-4.0
4	19245.00	42.6 AV	54.0	-11.4	1.59 H	188	46.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.3 PK	88.2	-39.9	1.91 V	207	35.2	13.1
2	#12830.00	38.8 AV	68.2	-29.4	1.91 V	207	25.7	13.1
3	19245.00	56.2 PK	74.0	-17.8	1.70 V	85	60.2	-4.0
4	19245.00	43.6 AV	54.0	-10.4	1.70 V	85	47.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	50.2 PK	88.2	-38.0	3.01 H	84	36.9	13.3
2	#13070.00	38.8 AV	68.2	-29.4	3.01 H	84	25.5	13.3
3	19605.00	54.0 PK	74.0	-20.0	1.57 H	173	58.0	-4.0
4	19605.00	42.5 AV	54.0	-11.5	1.57 H	173	46.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.9 PK	88.2	-39.3	1.95 V	204	35.6	13.3
2	#13070.00	39.2 AV	68.2	-29.0	1.95 V	204	25.9	13.3
3	19605.00	55.3 PK	74.0	-18.7	1.74 V	74	59.3	-4.0
4	19605.00	43.0 AV	54.0	-11.0	1.74 V	74	47.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.9 PK	74.0	-24.1	3.11 H	86	35.8	14.1
2	13390.00	38.2 AV	54.0	-15.8	3.11 H	86	24.1	14.1
3	20085.00	54.0 PK	74.0	-20.0	1.62 H	199	57.4	-3.4
4	20085.00	42.5 AV	54.0	-11.5	1.62 H	199	45.9	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.6 PK	74.0	-25.4	1.94 V	211	34.5	14.1
2	13390.00	39.3 AV	54.0	-14.7	1.94 V	211	25.2	14.1
3	20085.00	56.1 PK	74.0	-17.9	1.68 V	56	59.5	-3.4
4	20085.00	43.6 AV	54.0	-10.4	1.68 V	56	47.0	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	50.0 PK	88.2	-38.2	3.08 H	63	34.8	15.2
2	#13710.00	38.7 AV	68.2	-29.5	3.08 H	63	23.5	15.2
3	20565.00	53.8 PK	74.0	-20.2	1.69 H	193	57.0	-3.2
4	20565.00	42.6 AV	54.0	-11.4	1.69 H	193	45.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.4 PK	88.2	-39.8	1.96 V	190	33.2	15.2
2	#13710.00	39.0 AV	68.2	-29.2	1.96 V	190	23.8	15.2
3	20565.00	55.2 PK	74.0	-18.8	1.71 V	56	58.4	-3.2
4	20565.00	43.1 AV	54.0	-10.9	1.71 V	56	46.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.6 PK	74.0	-24.4	3.08 H	53	37.4	12.2
2	11910.00	38.4 AV	54.0	-15.6	3.08 H	53	26.2	12.2
3	17865.00	53.5 PK	74.0	-20.5	1.65 H	191	31.7	21.8
4	17865.00	42.2 AV	54.0	-11.8	1.65 H	191	20.4	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.1 PK	74.0	-25.9	1.94 V	183	35.9	12.2
2	11910.00	38.2 AV	54.0	-15.8	1.94 V	183	26.0	12.2
3	17865.00	55.2 PK	74.0	-18.8	1.76 V	101	33.4	21.8
4	17865.00	42.6 AV	54.0	-11.4	1.76 V	101	20.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	50.7 PK	74.0	-23.3	3.14 H	66	38.3	12.4
2	12350.00	39.1 AV	54.0	-14.9	3.14 H	66	26.7	12.4
3	18525.00	54.5 PK	74.0	-19.5	1.74 H	199	59.2	-4.7
4	18525.00	43.0 AV	54.0	-11.0	1.74 H	199	47.7	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.9 PK	74.0	-26.1	1.99 V	190	35.5	12.4
2	12350.00	37.7 AV	54.0	-16.3	1.99 V	190	25.3	12.4
3	18525.00	54.8 PK	74.0	-19.2	1.76 V	99	59.5	-4.7
4	18525.00	42.7 AV	54.0	-11.3	1.76 V	99	47.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	50.0 PK	88.2	-38.2	3.06 H	56	36.9	13.1
2	#12830.00	38.7 AV	68.2	-29.5	3.06 H	56	25.6	13.1
3	19245.00	54.4 PK	74.0	-19.6	1.66 H	190	58.4	-4.0
4	19245.00	43.0 AV	54.0	-11.0	1.66 H	190	47.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.0 PK	88.2	-40.2	1.90 V	174	34.9	13.1
2	#12830.00	38.1 AV	68.2	-30.1	1.90 V	174	25.0	13.1
3	19245.00	54.9 PK	74.0	-19.1	1.77 V	87	58.9	-4.0
4	19245.00	42.5 AV	54.0	-11.5	1.77 V	87	46.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	50.2 PK	88.2	-38.0	3.07 H	70	36.9	13.3
2	#13070.00	39.0 AV	68.2	-29.2	3.07 H	70	25.7	13.3
3	19605.00	53.7 PK	74.0	-20.3	1.64 H	188	57.7	-4.0
4	19605.00	42.7 AV	54.0	-11.3	1.64 H	188	46.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.1 PK	88.2	-40.1	1.97 V	190	34.8	13.3
2	#13070.00	38.0 AV	68.2	-30.2	1.97 V	190	24.7	13.3
3	19605.00	54.8 PK	74.0	-19.2	1.71 V	95	58.8	-4.0
4	19605.00	42.7 AV	54.0	-11.3	1.71 V	95	46.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.9 PK	74.0	-24.1	3.11 H	72	35.8	14.1
2	13390.00	38.6 AV	54.0	-15.4	3.11 H	72	24.5	14.1
3	20085.00	53.7 PK	74.0	-20.3	1.70 H	194	57.1	-3.4
4	20085.00	42.7 AV	54.0	-11.3	1.70 H	194	46.1	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.5 PK	74.0	-25.5	1.99 V	192	34.4	14.1
2	13390.00	38.4 AV	54.0	-15.6	1.99 V	192	24.3	14.1
3	20085.00	55.1 PK	74.0	-18.9	1.74 V	103	58.5	-3.4
4	20085.00	42.5 AV	54.0	-11.5	1.74 V	103	45.9	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	50.3 PK	88.2	-37.9	3.09 H	53	35.1	15.2
2	#13710.00	39.0 AV	68.2	-29.2	3.09 H	53	23.8	15.2
3	20565.00	54.0 PK	74.0	-20.0	1.66 H	206	57.2	-3.2
4	20565.00	42.8 AV	54.0	-11.2	1.66 H	206	46.0	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.1 PK	88.2	-40.1	1.92 V	174	32.9	15.2
2	#13710.00	38.2 AV	68.2	-30.0	1.92 V	174	23.0	15.2
3	20565.00	54.4 PK	74.0	-19.6	1.69 V	87	57.6	-3.2
4	20565.00	42.3 AV	54.0	-11.7	1.69 V	87	45.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	49.5 PK	74.0	-24.5	3.03 H	67	37.3	12.2
2	11930.00	38.2 AV	54.0	-15.8	3.03 H	67	26.0	12.2
3	17895.00	53.8 PK	74.0	-20.2	1.68 H	201	31.5	22.3
4	17895.00	42.8 AV	54.0	-11.2	1.68 H	201	20.5	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	47.6 PK	74.0	-26.4	1.95 V	167	35.4	12.2
2	11930.00	37.7 AV	54.0	-16.3	1.95 V	167	25.5	12.2
3	17895.00	54.4 PK	74.0	-19.6	1.70 V	102	32.1	22.3
4	17895.00	42.3 AV	54.0	-11.7	1.70 V	102	20.0	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	50.3 PK	74.0	-23.7	3.11 H	75	37.9	12.4
2	12330.00	39.1 AV	54.0	-14.9	3.11 H	75	26.7	12.4
3	18495.00	53.5 PK	74.0	-20.5	1.66 H	184	58.2	-4.7
4	18495.00	42.5 AV	54.0	-11.5	1.66 H	184	47.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	47.9 PK	74.0	-26.1	1.95 V	191	35.5	12.4
2	12330.00	38.1 AV	54.0	-15.9	1.95 V	191	25.7	12.4
3	18495.00	54.4 PK	74.0	-19.6	1.69 V	101	59.1	-4.7
4	18495.00	42.3 AV	54.0	-11.7	1.69 V	101	47.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	50.4 PK	88.2	-37.8	3.06 H	51	37.3	13.1
2	#12810.00	38.9 AV	68.2	-29.3	3.06 H	51	25.8	13.1
3	19215.00	53.7 PK	74.0	-20.3	1.74 H	181	57.9	-4.2
4	19215.00	42.2 AV	54.0	-11.8	1.74 H	181	46.4	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.5 PK	88.2	-39.7	1.99 V	173	35.4	13.1
2	#12810.00	38.1 AV	68.2	-30.1	1.99 V	173	25.0	13.1
3	19215.00	55.0 PK	74.0	-19.0	1.74 V	93	59.2	-4.2
4	19215.00	43.0 AV	54.0	-11.0	1.74 V	93	47.2	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	50.5 PK	88.2	-37.7	3.07 H	49	37.1	13.4
2	#13130.00	38.9 AV	68.2	-29.3	3.07 H	49	25.5	13.4
3	19695.00	53.3 PK	74.0	-20.7	1.71 H	208	57.3	-4.0
4	19695.00	42.1 AV	54.0	-11.9	1.71 H	208	46.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.3 PK	88.2	-39.9	1.98 V	188	34.9	13.4
2	#13130.00	38.2 AV	68.2	-30.0	1.98 V	188	24.8	13.4
3	19695.00	55.0 PK	74.0	-19.0	1.68 V	84	59.0	-4.0
4	19695.00	42.6 AV	54.0	-11.4	1.68 V	84	46.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	50.4 PK	88.2	-37.8	3.03 H	60	36.0	14.4
2	#13450.00	38.9 AV	68.2	-29.3	3.03 H	60	24.5	14.4
3	20175.00	53.8 PK	74.0	-20.2	1.70 H	196	57.0	-3.2
4	20175.00	42.8 AV	54.0	-11.2	1.70 H	196	46.0	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	48.3 PK	88.2	-39.9	2.01 V	167	33.9	14.4
2	#13450.00	38.4 AV	68.2	-29.8	2.01 V	167	24.0	14.4
3	20175.00	55.3 PK	74.0	-18.7	1.76 V	102	58.5	-3.2
4	20175.00	42.8 AV	54.0	-11.2	1.76 V	102	46.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	49.5 PK	88.2	-38.7	3.09 H	67	34.2	15.3
2	#13690.00	38.3 AV	68.2	-29.9	3.09 H	67	23.0	15.3
3	20535.00	53.5 PK	74.0	-20.5	1.70 H	187	56.7	-3.2
4	20535.00	42.3 AV	54.0	-11.7	1.70 H	187	45.5	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	48.5 PK	88.2	-39.7	1.99 V	166	33.2	15.3
2	#13690.00	38.2 AV	68.2	-30.0	1.99 V	166	22.9	15.3
3	20535.00	54.5 PK	74.0	-19.5	1.74 V	109	57.7	-3.2
4	20535.00	42.2 AV	54.0	-11.8	1.74 V	109	45.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	50.7 PK	74.0	-23.3	3.04 H	67	38.5	12.2
2	11970.00	39.1 AV	54.0	-14.9	3.04 H	67	26.9	12.2
3	17955.00	53.5 PK	74.0	-20.5	1.64 H	198	30.3	23.2
4	17955.00	42.4 AV	54.0	-11.6	1.64 H	198	19.2	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.9 PK	74.0	-25.1	2.01 V	176	36.7	12.2
2	11970.00	38.5 AV	54.0	-15.5	2.01 V	176	26.3	12.2
3	17955.00	54.5 PK	74.0	-19.5	1.79 V	96	31.3	23.2
4	17955.00	42.2 AV	54.0	-11.8	1.79 V	96	19.0	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	49.8 PK	74.0	-24.2	3.11 H	50	37.3	12.5
2	12290.00	38.6 AV	54.0	-15.4	3.11 H	50	26.1	12.5
3	18435.00	54.1 PK	74.0	-19.9	1.68 H	180	59.0	-4.9
4	18435.00	42.8 AV	54.0	-11.2	1.68 H	180	47.7	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	48.6 PK	74.0	-25.4	1.95 V	191	36.1	12.5
2	12290.00	38.5 AV	54.0	-15.5	1.95 V	191	26.0	12.5
3	18435.00	55.1 PK	74.0	-18.9	1.79 V	89	60.0	-4.9
4	18435.00	43.0 AV	54.0	-11.0	1.79 V	89	47.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	49.7 PK	88.2	-38.5	3.11 H	71	36.6	13.1
2	#12770.00	38.4 AV	68.2	-29.8	3.11 H	71	25.3	13.1
3	19155.00	54.0 PK	74.0	-20.0	1.69 H	178	58.2	-4.2
4	19155.00	42.6 AV	54.0	-11.4	1.69 H	178	46.8	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.4 PK	88.2	-39.8	2.01 V	174	35.3	13.1
2	#12770.00	38.0 AV	68.2	-30.2	2.01 V	174	24.9	13.1
3	19155.00	54.8 PK	74.0	-19.2	1.72 V	81	59.0	-4.2
4	19155.00	42.7 AV	54.0	-11.3	1.72 V	81	46.9	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	49.9 PK	74.0	-24.1	3.12 H	57	36.4	13.5
2	13250.00	38.9 AV	54.0	-15.1	3.12 H	57	25.4	13.5
3	19875.00	54.1 PK	74.0	-19.9	1.69 H	204	57.9	-3.8
4	19875.00	43.1 AV	54.0	-10.9	1.69 H	204	46.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	47.7 PK	74.0	-26.3	1.94 V	193	34.2	13.5
2	13250.00	37.8 AV	54.0	-16.2	1.94 V	193	24.3	13.5
3	19875.00	54.4 PK	74.0	-19.6	1.70 V	96	58.2	-3.8
4	19875.00	42.1 AV	54.0	-11.9	1.70 V	96	45.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	49.8 PK	88.2	-38.4	3.04 H	76	35.6	14.2
2	#13410.00	38.6 AV	68.2	-29.6	3.04 H	76	24.4	14.2
3	20115.00	53.9 PK	74.0	-20.1	1.71 H	183	57.1	-3.2
4	20115.00	42.6 AV	54.0	-11.4	1.71 H	183	45.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.4 PK	88.2	-39.8	1.94 V	173	34.2	14.2
2	#13410.00	38.1 AV	68.2	-30.1	1.94 V	173	23.9	14.2
3	20115.00	55.1 PK	74.0	-18.9	1.72 V	88	58.3	-3.2
4	20115.00	42.8 AV	54.0	-11.2	1.72 V	88	46.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	49.6 PK	88.2	-38.6	3.03 H	77	34.7	14.9
2	#13570.00	38.4 AV	68.2	-29.8	3.03 H	77	23.5	14.9
3	20355.00	53.9 PK	74.0	-20.1	1.75 H	182	56.8	-2.9
4	20355.00	42.9 AV	54.0	-11.1	1.75 H	182	45.8	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	48.2 PK	88.2	-40.0	1.97 V	177	33.3	14.9
2	#13570.00	37.9 AV	68.2	-30.3	1.97 V	177	23.0	14.9
3	20355.00	54.8 PK	74.0	-19.2	1.74 V	89	57.7	-2.9
4	20355.00	42.7 AV	54.0	-11.3	1.74 V	89	45.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	50.6 PK	74.0	-23.4	3.03 H	61	38.1	12.5
2	12050.00	39.1 AV	54.0	-14.9	3.03 H	61	26.6	12.5
3	18075.00	53.5 PK	74.0	-20.5	1.69 H	204	58.0	-4.5
4	18075.00	42.1 AV	54.0	-11.9	1.69 H	204	46.6	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.8 PK	74.0	-26.2	1.95 V	198	35.3	12.5
2	12050.00	37.9 AV	54.0	-16.1	1.95 V	198	25.4	12.5
3	18075.00	55.0 PK	74.0	-19.0	1.68 V	81	59.5	-4.5
4	18075.00	42.5 AV	54.0	-11.5	1.68 V	81	47.0	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	50.0 PK	74.0	-24.0	3.12 H	76	37.6	12.4
2	12370.00	38.8 AV	54.0	-15.2	3.12 H	76	26.4	12.4
3	18555.00	53.9 PK	74.0	-20.1	1.67 H	195	58.4	-4.5
4	18555.00	42.5 AV	54.0	-11.5	1.67 H	195	47.0	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.1 PK	74.0	-25.9	1.91 V	184	35.7	12.4
2	12370.00	38.2 AV	54.0	-15.8	1.91 V	184	25.8	12.4
3	18555.00	54.9 PK	74.0	-19.1	1.71 V	94	59.4	-4.5
4	18555.00	42.5 AV	54.0	-11.5	1.71 V	94	47.0	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	50.3 PK	74.0	-23.7	3.09 H	69	37.3	13.0
2	12690.00	38.9 AV	54.0	-15.1	3.09 H	69	25.9	13.0
3	19035.00	54.2 PK	74.0	-19.8	1.69 H	202	58.3	-4.1
4	19035.00	42.9 AV	54.0	-11.1	1.69 H	202	47.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.1 PK	74.0	-25.9	1.96 V	193	35.1	13.0
2	12690.00	38.0 AV	54.0	-16.0	1.96 V	193	25.0	13.0
3	19035.00	54.9 PK	74.0	-19.1	1.74 V	98	59.0	-4.1
4	19035.00	42.8 AV	54.0	-11.2	1.74 V	98	46.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.2 PK	74.0	-24.8	3.03 H	75	35.4	13.8
2	13330.00	38.2 AV	54.0	-15.8	3.03 H	75	24.4	13.8
3	19995.00	54.0 PK	74.0	-20.0	1.69 H	187	57.8	-3.8
4	19995.00	42.7 AV	54.0	-11.3	1.69 H	187	46.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.7 PK	74.0	-25.3	1.91 V	178	34.9	13.8
2	13330.00	38.4 AV	54.0	-15.6	1.91 V	178	24.6	13.8
3	19995.00	55.3 PK	74.0	-18.7	1.75 V	108	59.1	-3.8
4	19995.00	43.0 AV	54.0	-11.0	1.75 V	108	46.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.1 PK	74.0	-26.9	2.94 H	92	34.9	12.2
2	11910.00	36.5 AV	54.0	-17.5	2.94 H	92	24.3	12.2
3	17865.00	53.5 PK	74.0	-20.5	1.56 H	236	31.7	21.8
4	17865.00	42.5 AV	54.0	-11.5	1.56 H	236	20.7	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.2 PK	74.0	-26.8	1.99 V	141	35.0	12.2
2	11910.00	37.0 AV	54.0	-17.0	1.99 V	141	24.8	12.2
3	17865.00	52.0 PK	74.0	-22.0	1.55 V	54	30.2	21.8
4	17865.00	42.2 AV	54.0	-11.8	1.55 V	54	20.4	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.8 PK	88.2	-41.4	2.95 H	87	33.7	13.1
2	#12830.00	36.5 AV	68.2	-31.7	2.95 H	87	23.4	13.1
3	19245.00	53.9 PK	74.0	-20.1	1.60 H	231	57.9	-4.0
4	19245.00	43.2 AV	54.0	-10.8	1.60 H	231	47.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.7 PK	88.2	-40.5	2.02 V	142	34.6	13.1
2	#12830.00	37.4 AV	68.2	-30.8	2.02 V	142	24.3	13.1
3	19245.00	51.8 PK	74.0	-22.2	1.54 V	70	55.8	-4.0
4	19245.00	41.9 AV	54.0	-12.1	1.54 V	70	45.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.4 PK	88.2	-40.8	2.94 H	77	34.1	13.3
2	#13070.00	37.0 AV	68.2	-31.2	2.94 H	77	23.7	13.3
3	19605.00	53.7 PK	74.0	-20.3	1.58 H	239	57.7	-4.0
4	19605.00	42.8 AV	54.0	-11.2	1.58 H	239	46.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.5 PK	88.2	-40.7	1.95 V	143	34.2	13.3
2	#13070.00	37.5 AV	68.2	-30.7	1.95 V	143	24.2	13.3
3	19605.00	51.7 PK	74.0	-22.3	1.50 V	62	55.7	-4.0
4	19605.00	42.3 AV	54.0	-11.7	1.50 V	62	46.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.8 PK	88.2	-40.4	2.95 H	80	32.6	15.2
2	#13710.00	37.1 AV	68.2	-31.1	2.95 H	80	21.9	15.2
3	20565.00	53.5 PK	74.0	-20.5	1.62 H	217	56.7	-3.2
4	20565.00	42.8 AV	54.0	-11.2	1.62 H	217	46.0	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.5 PK	88.2	-40.7	1.97 V	147	32.3	15.2
2	#13710.00	37.7 AV	68.2	-30.5	1.97 V	147	22.5	15.2
3	20565.00	51.6 PK	74.0	-22.4	1.52 V	68	54.8	-3.2
4	20565.00	41.9 AV	54.0	-12.1	1.52 V	68	45.1	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.4 PK	74.0	-26.6	2.96 H	103	35.2	12.2
2	11910.00	37.1 AV	54.0	-16.9	2.96 H	103	24.9	12.2
3	17865.00	53.2 PK	74.0	-20.8	1.60 H	236	31.4	21.8
4	17865.00	42.7 AV	54.0	-11.3	1.60 H	236	20.9	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.8 PK	74.0	-26.2	1.97 V	163	35.6	12.2
2	11910.00	37.9 AV	54.0	-16.1	1.97 V	163	25.7	12.2
3	17865.00	52.6 PK	74.0	-21.4	1.58 V	49	30.8	21.8
4	17865.00	42.8 AV	54.0	-11.2	1.58 V	49	21.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.8 PK	88.2	-40.4	2.97 H	105	34.7	13.1
2	#12830.00	37.1 AV	68.2	-31.1	2.97 H	105	24.0	13.1
3	19245.00	53.3 PK	74.0	-20.7	1.62 H	217	57.3	-4.0
4	19245.00	42.4 AV	54.0	-11.6	1.62 H	217	46.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.1 PK	88.2	-40.1	2.01 V	141	35.0	13.1
2	#12830.00	37.9 AV	68.2	-30.3	2.01 V	141	24.8	13.1
3	19245.00	52.6 PK	74.0	-21.4	1.46 V	51	56.6	-4.0
4	19245.00	42.6 AV	54.0	-11.4	1.46 V	51	46.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.9 PK	88.2	-40.3	2.91 H	96	34.6	13.3
2	#13070.00	37.1 AV	68.2	-31.1	2.91 H	96	23.8	13.3
3	19605.00	53.2 PK	74.0	-20.8	1.56 H	228	57.2	-4.0
4	19605.00	42.8 AV	54.0	-11.2	1.56 H	228	46.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.6 PK	88.2	-40.6	1.92 V	160	34.3	13.3
2	#13070.00	37.3 AV	68.2	-30.9	1.92 V	160	24.0	13.3
3	19605.00	52.0 PK	74.0	-22.0	1.54 V	50	56.0	-4.0
4	19605.00	42.1 AV	54.0	-11.9	1.54 V	50	46.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.0 PK	88.2	-41.2	2.95 H	93	31.8	15.2
2	#13710.00	36.2 AV	68.2	-32.0	2.95 H	93	21.0	15.2
3	20565.00	53.9 PK	74.0	-20.1	1.58 H	220	57.1	-3.2
4	20565.00	43.1 AV	54.0	-10.9	1.58 H	220	46.3	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.7 PK	88.2	-40.5	1.94 V	152	32.5	15.2
2	#13710.00	37.4 AV	68.2	-30.8	1.94 V	152	22.2	15.2
3	20565.00	51.7 PK	74.0	-22.3	1.57 V	70	54.9	-3.2
4	20565.00	42.1 AV	54.0	-11.9	1.57 V	70	45.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.3 PK	74.0	-26.7	2.98 H	83	35.1	12.2
2	11910.00	36.5 AV	54.0	-17.5	2.98 H	83	24.3	12.2
3	17865.00	54.0 PK	74.0	-20.0	1.61 H	247	32.2	21.8
4	17865.00	43.1 AV	54.0	-10.9	1.61 H	247	21.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.7 PK	74.0	-26.3	1.97 V	170	35.5	12.2
2	11910.00	37.7 AV	54.0	-16.3	1.97 V	170	25.5	12.2
3	17865.00	51.6 PK	74.0	-22.4	1.58 V	40	29.8	21.8
4	17865.00	41.9 AV	54.0	-12.1	1.58 V	40	20.1	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.1 PK	88.2	-40.1	2.97 H	96	35.0	13.1
2	#12830.00	37.2 AV	68.2	-31.0	2.97 H	96	24.1	13.1
3	19245.00	53.8 PK	74.0	-20.2	1.58 H	246	57.8	-4.0
4	19245.00	42.9 AV	54.0	-11.1	1.58 H	246	46.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.5 PK	88.2	-40.7	1.95 V	168	34.4	13.1
2	#12830.00	37.4 AV	68.2	-30.8	1.95 V	168	24.3	13.1
3	19245.00	51.7 PK	74.0	-22.3	1.55 V	65	55.7	-4.0
4	19245.00	42.0 AV	54.0	-12.0	1.55 V	65	46.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.4 PK	88.2	-40.8	2.94 H	91	34.1	13.3
2	#13070.00	36.8 AV	68.2	-31.4	2.94 H	91	23.5	13.3
3	19605.00	53.3 PK	74.0	-20.7	1.66 H	218	57.3	-4.0
4	19605.00	42.5 AV	54.0	-11.5	1.66 H	218	46.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.8 PK	88.2	-40.4	1.97 V	165	34.5	13.3
2	#13070.00	37.7 AV	68.2	-30.5	1.97 V	165	24.4	13.3
3	19605.00	51.6 PK	74.0	-22.4	1.47 V	53	55.6	-4.0
4	19605.00	42.1 AV	54.0	-11.9	1.47 V	53	46.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.5 PK	88.2	-40.7	2.92 H	88	32.3	15.2
2	#13710.00	37.2 AV	68.2	-31.0	2.92 H	88	22.0	15.2
3	20565.00	53.6 PK	74.0	-20.4	1.60 H	234	56.8	-3.2
4	20565.00	43.0 AV	54.0	-11.0	1.60 H	234	46.2	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.7 PK	88.2	-40.5	2.03 V	168	32.5	15.2
2	#13710.00	37.7 AV	68.2	-30.5	2.03 V	168	22.5	15.2
3	20565.00	52.3 PK	74.0	-21.7	1.48 V	59	55.5	-3.2
4	20565.00	42.5 AV	54.0	-11.5	1.48 V	59	45.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.7 PK	74.0	-26.3	2.94 H	92	35.5	12.2
2	11910.00	37.1 AV	54.0	-16.9	2.94 H	92	24.9	12.2
3	17865.00	53.5 PK	74.0	-20.5	1.57 H	232	31.7	21.8
4	17865.00	42.9 AV	54.0	-11.1	1.57 H	232	21.1	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.9 PK	74.0	-26.1	2.00 V	162	35.7	12.2
2	11910.00	37.9 AV	54.0	-16.1	2.00 V	162	25.7	12.2
3	17865.00	51.8 PK	74.0	-22.2	1.56 V	38	30.0	21.8
4	17865.00	42.2 AV	54.0	-11.8	1.56 V	38	20.4	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.0 PK	88.2	-41.2	3.01 H	103	33.9	13.1
2	#12830.00	36.5 AV	68.2	-31.7	3.01 H	103	23.4	13.1
3	19245.00	53.4 PK	74.0	-20.6	1.67 H	219	57.4	-4.0
4	19245.00	42.8 AV	54.0	-11.2	1.67 H	219	46.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.2 PK	88.2	-41.0	2.00 V	158	34.1	13.1
2	#12830.00	36.9 AV	68.2	-31.3	2.00 V	158	23.8	13.1
3	19245.00	52.2 PK	74.0	-21.8	1.55 V	51	56.2	-4.0
4	19245.00	42.3 AV	54.0	-11.7	1.55 V	51	46.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.9 PK	88.2	-40.3	2.93 H	106	34.6	13.3
2	#13070.00	37.2 AV	68.2	-31.0	2.93 H	106	23.9	13.3
3	19605.00	54.2 PK	74.0	-19.8	1.60 H	231	58.2	-4.0
4	19605.00	43.2 AV	54.0	-10.8	1.60 H	231	47.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.0 PK	88.2	-40.2	1.94 V	163	34.7	13.3
2	#13070.00	37.7 AV	68.2	-30.5	1.94 V	163	24.4	13.3
3	19605.00	52.0 PK	74.0	-22.0	1.52 V	62	56.0	-4.0
4	19605.00	42.5 AV	54.0	-11.5	1.52 V	62	46.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.0 PK	88.2	-41.2	2.97 H	106	31.8	15.2
2	#13710.00	36.2 AV	68.2	-32.0	2.97 H	106	21.0	15.2
3	20565.00	54.0 PK	74.0	-20.0	1.60 H	238	57.2	-3.2
4	20565.00	43.3 AV	54.0	-10.7	1.60 H	238	46.5	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.8 PK	88.2	-40.4	1.93 V	166	32.6	15.2
2	#13710.00	37.5 AV	68.2	-30.7	1.93 V	166	22.3	15.2
3	20565.00	51.6 PK	74.0	-22.4	1.52 V	57	54.8	-3.2
4	20565.00	42.2 AV	54.0	-11.8	1.52 V	57	45.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.2 PK	74.0	-26.8	2.90 H	81	35.0	12.2
2	11910.00	36.6 AV	54.0	-17.4	2.90 H	81	24.4	12.2
3	17865.00	53.2 PK	74.0	-20.8	1.59 H	225	31.4	21.8
4	17865.00	42.5 AV	54.0	-11.5	1.59 H	225	20.7	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.0 PK	74.0	-27.0	1.92 V	171	34.8	12.2
2	11910.00	37.0 AV	54.0	-17.0	1.92 V	171	24.8	12.2
3	17865.00	52.2 PK	74.0	-21.8	1.49 V	48	30.4	21.8
4	17865.00	42.5 AV	54.0	-11.5	1.49 V	48	20.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.5 PK	88.2	-40.7	2.90 H	86	34.4	13.1
2	#12830.00	37.1 AV	68.2	-31.1	2.90 H	86	24.0	13.1
3	19245.00	53.6 PK	74.0	-20.4	1.55 H	243	57.6	-4.0
4	19245.00	43.0 AV	54.0	-11.0	1.55 H	243	47.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.7 PK	88.2	-40.5	1.98 V	142	34.6	13.1
2	#12830.00	37.4 AV	68.2	-30.8	1.98 V	142	24.3	13.1
3	19245.00	52.0 PK	74.0	-22.0	1.54 V	58	56.0	-4.0
4	19245.00	42.1 AV	54.0	-11.9	1.54 V	58	46.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.4 PK	88.2	-40.8	2.91 H	90	34.1	13.3
2	#13070.00	36.9 AV	68.2	-31.3	2.91 H	90	23.6	13.3
3	19605.00	53.3 PK	74.0	-20.7	1.66 H	246	57.3	-4.0
4	19605.00	42.5 AV	54.0	-11.5	1.66 H	246	46.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.7 PK	88.2	-40.5	2.00 V	158	34.4	13.3
2	#13070.00	37.4 AV	68.2	-30.8	2.00 V	158	24.1	13.3
3	19605.00	51.4 PK	74.0	-22.6	1.57 V	49	55.4	-4.0
4	19605.00	41.8 AV	54.0	-12.2	1.57 V	49	45.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.7 PK	88.2	-40.5	2.91 H	100	32.5	15.2
2	#13710.00	37.0 AV	68.2	-31.2	2.91 H	100	21.8	15.2
3	20565.00	53.3 PK	74.0	-20.7	1.58 H	235	56.5	-3.2
4	20565.00	42.6 AV	54.0	-11.4	1.58 H	235	45.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.8 PK	88.2	-40.4	2.04 V	152	32.6	15.2
2	#13710.00	37.4 AV	68.2	-30.8	2.04 V	152	22.2	15.2
3	20565.00	52.7 PK	74.0	-21.3	1.47 V	56	55.9	-3.2
4	20565.00	42.7 AV	54.0	-11.3	1.47 V	56	45.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	47.3 PK	74.0	-26.7	2.93 H	93	35.1	12.2
2	11970.00	36.6 AV	54.0	-17.4	2.93 H	93	24.4	12.2
3	17955.00	53.5 PK	74.0	-20.5	1.58 H	223	30.3	23.2
4	17955.00	43.0 AV	54.0	-11.0	1.58 H	223	19.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	47.7 PK	74.0	-26.3	1.98 V	145	35.5	12.2
2	11970.00	37.5 AV	54.0	-16.5	1.98 V	145	25.3	12.2
3	17955.00	52.2 PK	74.0	-21.8	1.56 V	69	29.0	23.2
4	17955.00	42.4 AV	54.0	-11.6	1.56 V	69	19.2	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	47.4 PK	88.2	-40.8	3.00 H	100	34.3	13.1
2	#12770.00	36.7 AV	68.2	-31.5	3.00 H	100	23.6	13.1
3	19155.00	52.9 PK	74.0	-21.1	1.62 H	230	57.1	-4.2
4	19155.00	42.4 AV	54.0	-11.6	1.62 H	230	46.6	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	47.1 PK	88.2	-41.1	1.98 V	167	34.0	13.1
2	#12770.00	37.2 AV	68.2	-31.0	1.98 V	167	24.1	13.1
3	19155.00	52.0 PK	74.0	-22.0	1.56 V	64	56.2	-4.2
4	19155.00	42.4 AV	54.0	-11.6	1.56 V	64	46.6	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	47.3 PK	74.0	-26.7	2.99 H	108	33.8	13.5
2	13250.00	36.8 AV	54.0	-17.2	2.99 H	108	23.3	13.5
3	19875.00	52.9 PK	74.0	-21.1	1.65 H	230	56.7	-3.8
4	19875.00	42.4 AV	54.0	-11.6	1.65 H	230	46.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	47.1 PK	74.0	-26.9	1.93 V	164	33.6	13.5
2	13250.00	37.3 AV	54.0	-16.7	1.93 V	164	23.8	13.5
3	19875.00	52.0 PK	74.0	-22.0	1.55 V	66	55.8	-3.8
4	19875.00	42.6 AV	54.0	-11.4	1.55 V	66	46.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	46.7 PK	88.2	-41.5	2.97 H	105	31.8	14.9
2	#13570.00	36.3 AV	68.2	-31.9	2.97 H	105	21.4	14.9
3	20355.00	53.6 PK	74.0	-20.4	1.67 H	233	56.5	-2.9
4	20355.00	42.8 AV	54.0	-11.2	1.67 H	233	45.7	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	47.4 PK	88.2	-40.8	1.99 V	141	32.5	14.9
2	#13570.00	37.3 AV	68.2	-30.9	1.99 V	141	22.4	14.9
3	20355.00	52.1 PK	74.0	-21.9	1.55 V	65	55.0	-2.9
4	20355.00	42.6 AV	54.0	-11.4	1.55 V	65	45.5	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.0 PK	74.0	-27.0	3.00 H	84	34.5	12.5
2	12050.00	36.4 AV	54.0	-17.6	3.00 H	84	23.9	12.5
3	18075.00	52.9 PK	74.0	-21.1	1.64 H	227	57.4	-4.5
4	18075.00	42.3 AV	54.0	-11.7	1.64 H	227	46.8	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.4 PK	74.0	-26.6	1.93 V	142	34.9	12.5
2	12050.00	37.2 AV	54.0	-16.8	1.93 V	142	24.7	12.5
3	18075.00	52.0 PK	74.0	-22.0	1.56 V	63	56.5	-4.5
4	18075.00	42.1 AV	54.0	-11.9	1.56 V	63	46.6	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.7 PK	74.0	-26.3	2.94 H	94	34.7	13.0
2	12690.00	37.0 AV	54.0	-17.0	2.94 H	94	24.0	13.0
3	19035.00	53.8 PK	74.0	-20.2	1.56 H	219	57.9	-4.1
4	19035.00	43.0 AV	54.0	-11.0	1.56 H	219	47.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.8 PK	74.0	-26.2	2.00 V	151	34.8	13.0
2	12690.00	37.8 AV	54.0	-16.2	2.00 V	151	24.8	13.0
3	19035.00	51.6 PK	74.0	-22.4	1.48 V	45	55.7	-4.1
4	19035.00	41.9 AV	54.0	-12.1	1.48 V	45	46.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.5 PK	74.0	-26.5	2.95 H	102	33.7	13.8
2	13330.00	37.1 AV	54.0	-16.9	2.95 H	102	23.3	13.8
3	19995.00	53.9 PK	74.0	-20.1	1.58 H	215	57.7	-3.8
4	19995.00	43.0 AV	54.0	-11.0	1.58 H	215	46.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.5 PK	74.0	-26.5	1.94 V	145	33.7	13.8
2	13330.00	37.4 AV	54.0	-16.6	1.94 V	145	23.6	13.8
3	19995.00	52.3 PK	74.0	-21.7	1.50 V	53	56.1	-3.8
4	19995.00	42.6 AV	54.0	-11.4	1.50 V	53	46.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.6 PK	74.0	-26.4	3.01 H	99	35.1	12.5
2	12050.00	36.8 AV	54.0	-17.2	3.01 H	99	24.3	12.5
3	18075.00	54.0 PK	74.0	-20.0	1.55 H	218	58.5	-4.5
4	18075.00	43.2 AV	54.0	-10.8	1.55 H	218	47.7	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.1 PK	74.0	-25.9	2.04 V	157	35.6	12.5
2	12050.00	37.8 AV	54.0	-16.2	2.04 V	157	25.3	12.5
3	18075.00	51.8 PK	74.0	-22.2	1.55 V	55	56.3	-4.5
4	18075.00	42.0 AV	54.0	-12.0	1.55 V	55	46.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.3 PK	74.0	-26.7	2.98 H	101	34.3	13.0
2	12690.00	37.0 AV	54.0	-17.0	2.98 H	101	24.0	13.0
3	19035.00	53.4 PK	74.0	-20.6	1.55 H	244	57.5	-4.1
4	19035.00	42.5 AV	54.0	-11.5	1.55 H	244	46.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.4 PK	74.0	-26.6	2.03 V	157	34.4	13.0
2	12690.00	37.4 AV	54.0	-16.6	2.03 V	157	24.4	13.0
3	19035.00	51.6 PK	74.0	-22.4	1.54 V	50	55.7	-4.1
4	19035.00	42.1 AV	54.0	-11.9	1.54 V	50	46.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.2 PK	74.0	-26.8	2.92 H	88	33.4	13.8
2	13330.00	36.7 AV	54.0	-17.3	2.92 H	88	22.9	13.8
3	19995.00	53.1 PK	74.0	-20.9	1.58 H	236	56.9	-3.8
4	19995.00	42.7 AV	54.0	-11.3	1.58 H	236	46.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.3 PK	74.0	-26.7	2.01 V	143	33.5	13.8
2	13330.00	37.5 AV	54.0	-16.5	2.01 V	143	23.7	13.8
3	19995.00	52.7 PK	74.0	-21.3	1.47 V	55	56.5	-3.8
4	19995.00	42.8 AV	54.0	-11.2	1.47 V	55	46.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

7.10 APC (Automatic Power Control) and Proper Power Adjustment

Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Std. AP EIRP Power (dBm)	Std. Client Actual total Conducted Power (dBm)	LPI. AP EIRP Power (dBm)	LPI. Client Actual total Conducted Power (dBm)	Max. Gain (dBi)	Std. Client Actual EIRP Power (dBm)	LPI. Client Actual EIRP Power (dBm)	Test Result
802.11be (EHT20)	20	1	5955	24.6	9.46	30	6.21	8.37	17.83	14.58	PASS
802.11be (EHT20)	20	81	6355	29	13.37	30	6.29	8.37	21.74	14.66	PASS
802.11be (EHT20)	20	149	6695	32.3	16.65	30	6.34	8.37	25.02	14.71	PASS

Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Std. AP Registered EIRP Power (dBm)	Std. Client Chain 0 Actual Conducted Power (dBm)	Std. Client Chain 1 Actual Conducted Power (dBm)	Std. Client Actual total Conducted Power (dBm)	Max. Gain (dBi)	Std. Client Actual EIRP Power (dBm)	Std. Client Adjust Power Level (dB)	Test Result
802.11be (EHT20)	20	1	5955	24.6	6.58	6.31	9.46	8.37	17.83	6.77	PASS
802.11be (EHT20)	20	81	6355	29	10.4	10.32	13.37	8.37	21.74	7.26	PASS
802.11be (EHT20)	20	149	6695	32.3	13.6	13.68	16.65	8.37	25.02	7.28	PASS

Notes:

1. EIRP = Conducted Power + Directional Gain
2. Directional gain is the maximum gain of antennas.

Std. Power Client

For U-NII-5, The maximum gain is 8.37 dBi


For U-NII-6, The maximum gain is 8.37 dBi

For U-NII-7, The maximum gain is 8.37 dBi


3. Antenna gain values include all the applicable path losses.

4. Std. Client Adjust Power Level (dBm) = Std. AP Registered EIRP Power (dBm) - Std. Client Actual EIRP Power (dBm) ≥ 6 dB.

Spectrum Plot of Output Power Value

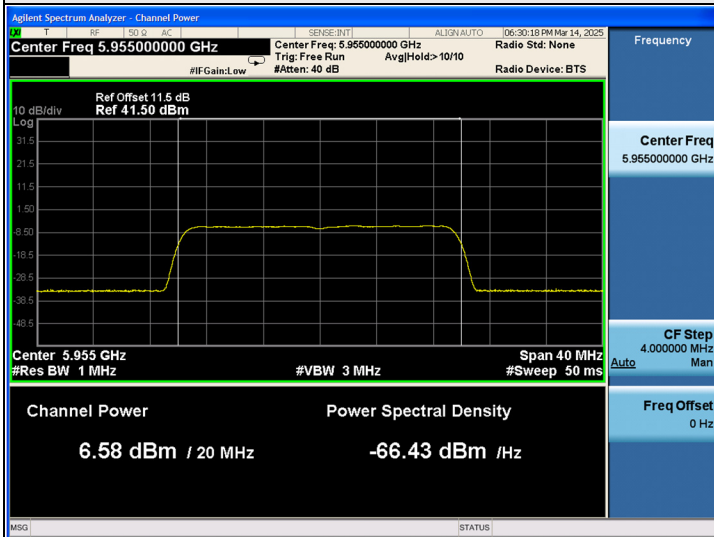


802.11be (EHT20) / Chain 0 : CH 1

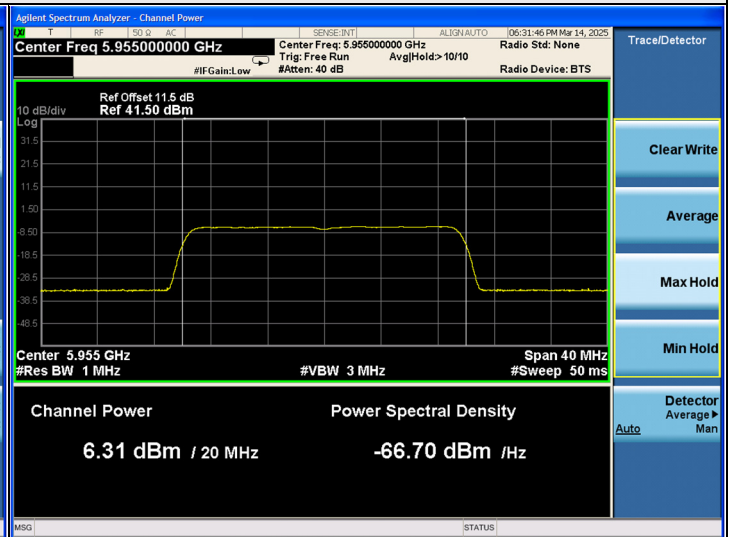


802.11be (EHT20) / Chain 1 : CH 1

Std. Client Actual Conducted Power (Chain 0+Chain 1): 9.46 dBm

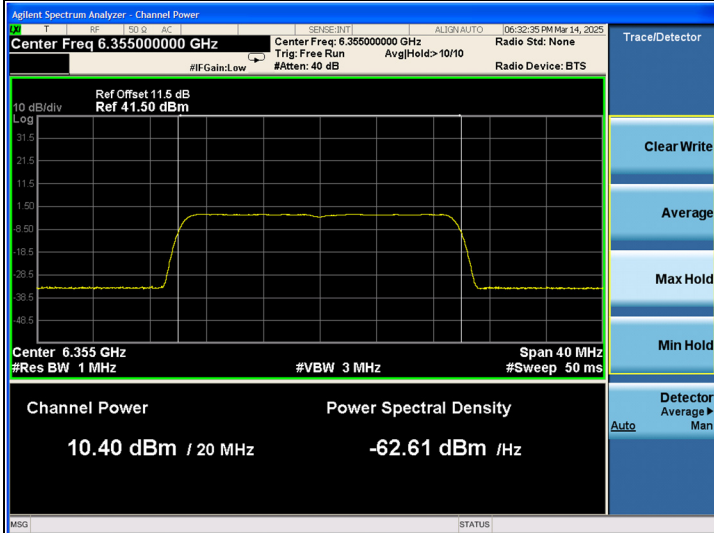

802.11be (EHT20) / Chain 0 : CH 81

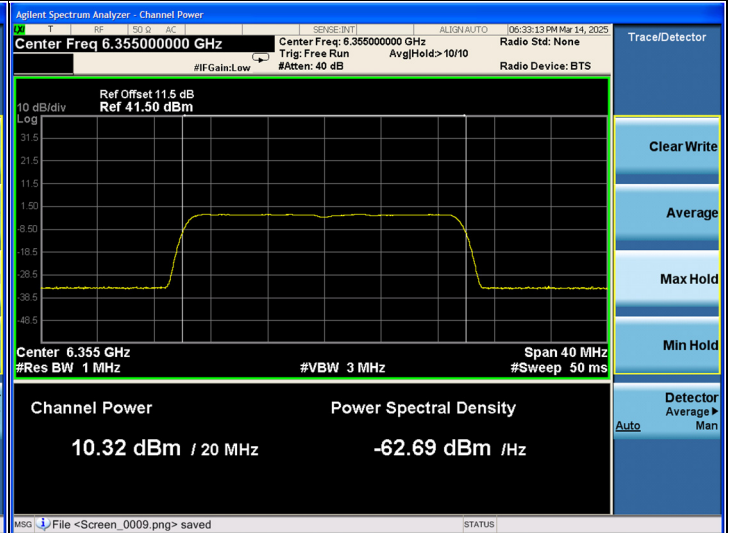

802.11be (EHT20) / Chain 1 : CH 81

Std. Client Actual Conducted Power (Chain 0+Chain 1): 13.37 dBm



802.11be (EHT20) / Chain 0 : CH 149



802.11be (EHT20) / Chain 1 : CH 149

Std. Client Actual Conducted Power (Chain 0+Chain 1): 16.65 dBm

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---