


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	61%
Test Engineer	Kenneth Huang	Configurations	Bluetooth + 2.4GHz WLAN Mode

Horizontal

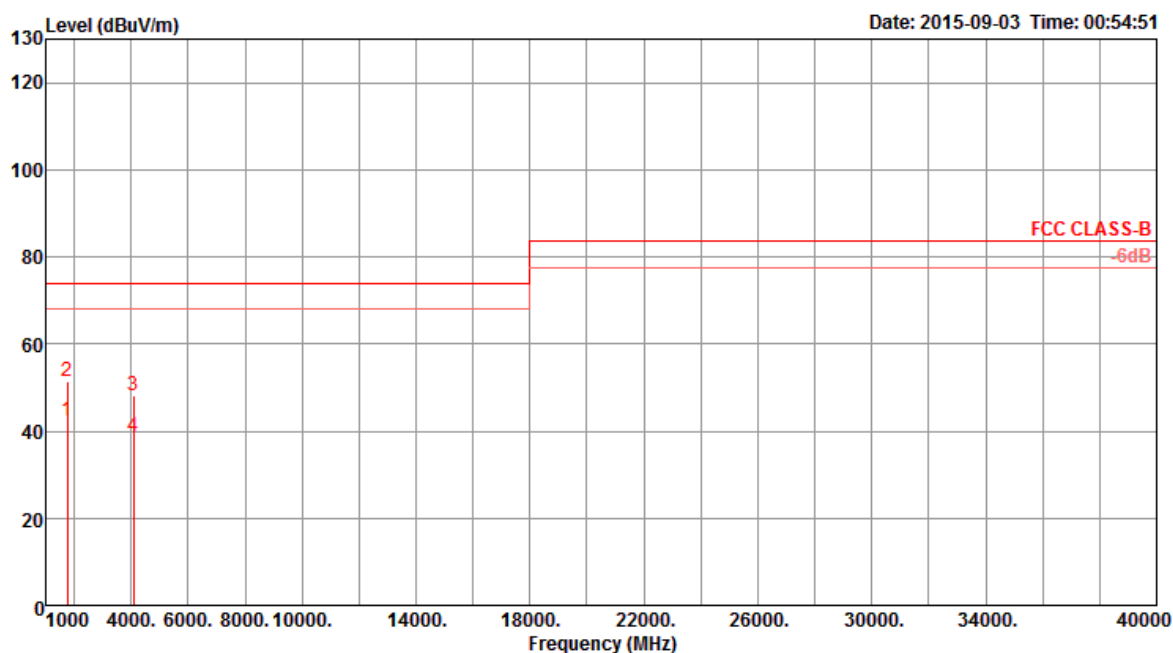

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	1750.06	42.33	74.00	-31.67	47.88	3.48	26.35	35.38	Average	100	102 HORIZONTAL
2	1750.15	51.54	74.00	-22.46	57.09	3.48	26.35	35.38	Peak	100	102 HORIZONTAL
3	4079.57	48.21	74.00	-25.79	44.04	5.44	32.78	34.05	Peak	100	239 HORIZONTAL
4	4080.32	38.61	74.00	-35.39	34.44	5.44	32.78	34.05	Average	100	239 HORIZONTAL


Vertical

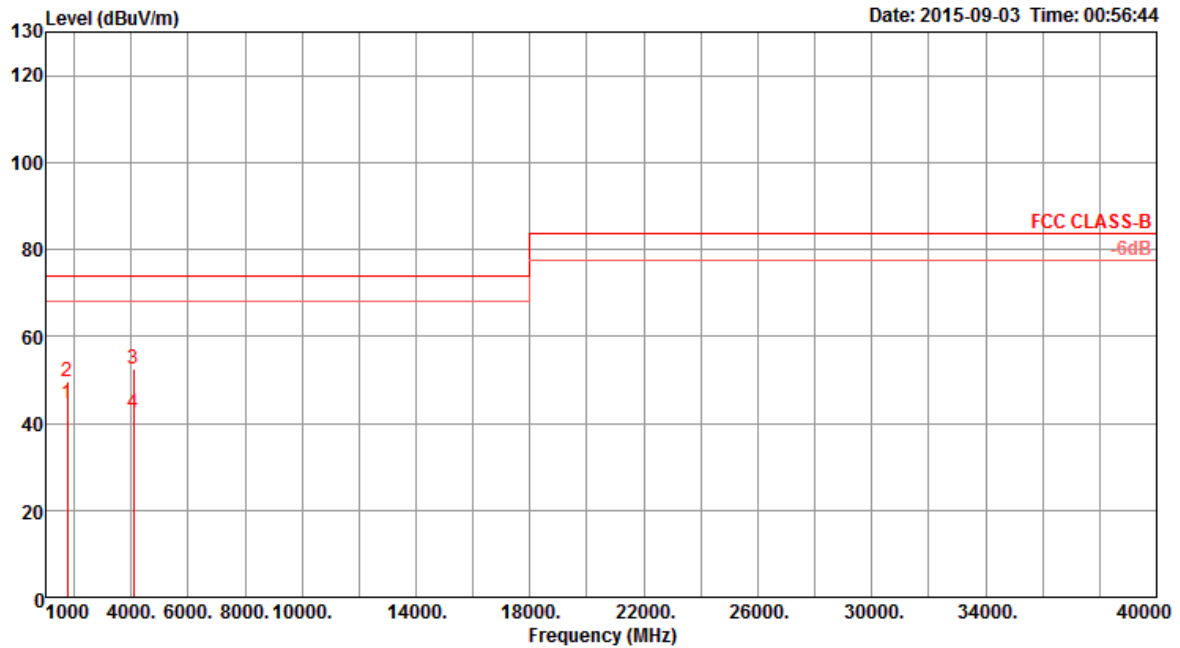

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	1749.91	44.54	74.00	-29.46	50.09	3.48	26.35	35.38	Average	100	94
2	1749.91	49.46	74.00	-24.54	55.01	3.48	26.35	35.38	Peak	100	94
3	4080.46	52.47	74.00	-21.53	48.30	5.44	32.78	34.05	Peak	100	109
4	4080.47	42.50	74.00	-31.50	38.33	5.44	32.78	34.05	Average	100	109


Temperature	24°C	Humidity	61%
Test Engineer	Kenneth Huang	Configurations	Bluetooth + 5GHz WLAN Mode

Horizontal

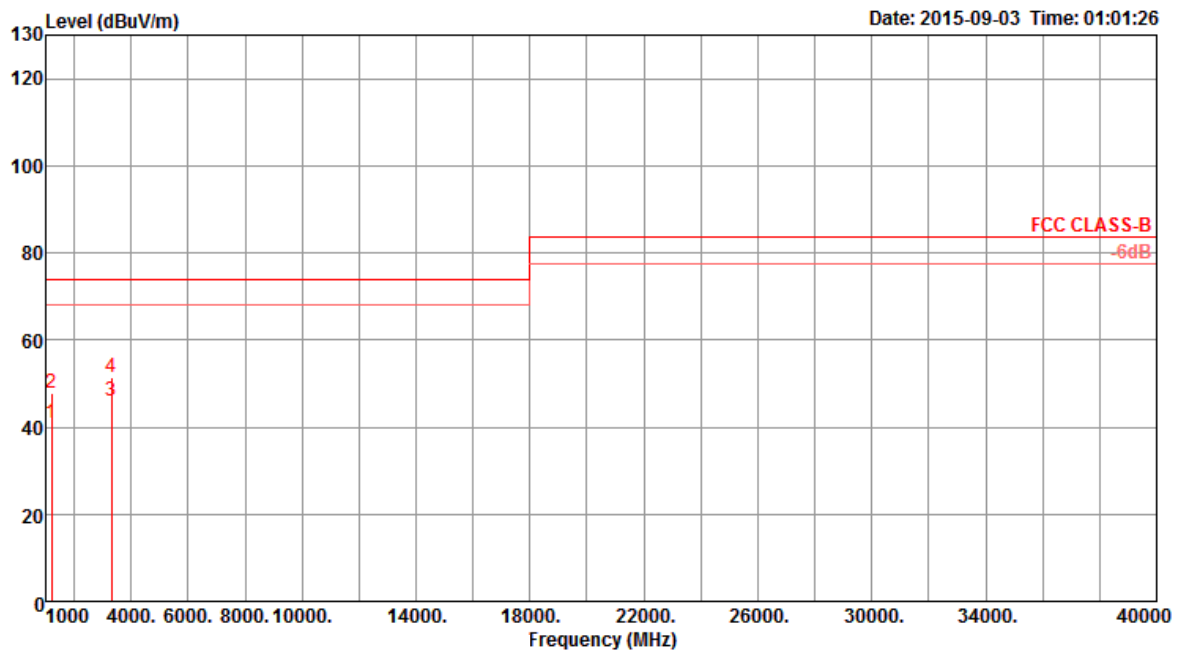

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	1204.28	40.92	74.00	-33.08	50.73	2.82	24.20	36.83	Average	100	178
2	1204.50	47.84	74.00	-26.16	57.65	2.82	24.20	36.83	Peak	100	178
3	3312.42	45.96	74.00	-28.04	44.57	4.92	30.92	34.45	Average	100	180
4	3313.07	51.53	74.00	-22.47	50.13	4.92	30.92	34.44	Peak	100	180

Vertical

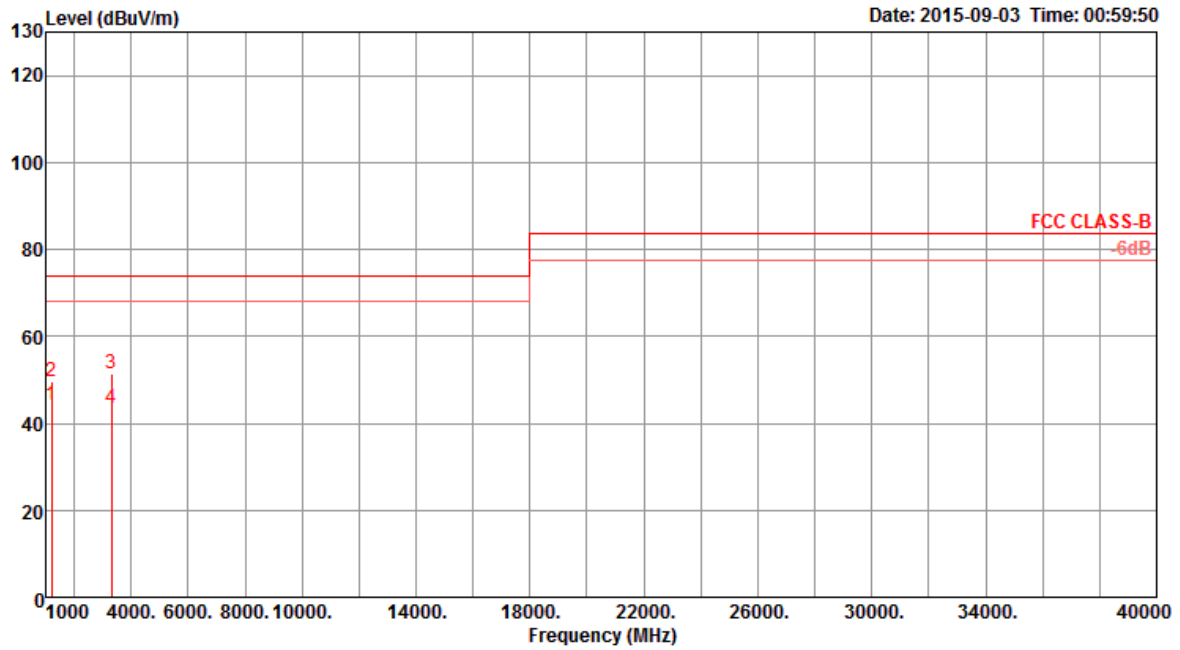

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1204.21	44.18	74.00	-29.82	53.99	2.82	24.20	36.83	100	93	VERTICAL
2	1204.37	49.78	74.00	-24.22	59.59	2.82	24.20	36.83	100	93	VERTICAL
3	3312.13	51.27	74.00	-22.73	49.88	4.92	30.92	34.45	100	258	VERTICAL
4	3312.69	43.57	74.00	-30.43	42.18	4.92	30.92	34.45	100	258	VERTICAL