WA-P-LE-03-042 Specification

1. Explanation of part number:

$$\frac{WA}{(1)}$$
 $\frac{P}{(2)}$ $\frac{LE}{(3)}$ $\frac{03}{(4)}$ $\frac{042}{(5)}$

- (1) Product Type: PCB Antenna
- (2) Material: PCB+ Cable
- (3) Frequency:2400-2500MHz&5150-5850MHz&5925-7125MHz
- (4) Coaxial Cable Type:03
- (5) Gain (Peak): 2400-2500MHz: 5.41dBi; 5150-5850MHz: 6.09dBi; 5925-7125MHz: 6.67dBi
- (6) Suffix:042
- (7) Company address: INPAQ TECHNOLOGY(SUZHOU) CO, LTD. No. 5, Chunqiu

Road, Huangdai Town, Xiangcheng District, Suzhou City, Jiangsu Province, China

2. Storage Condition:

Temperature -40 to +70 °C Humidity 65 ± 20 % RH

3. Operating Condition:

Temperature -40 to +70°C Humidity 65±20 % RH

4. Electrical Specification:

Those specifications were specially defined for 迪芬尼 DH600 WIFI 2 model, and all

UNLESS OTHER	JNLESS OTHER SPECIFIED TOLERANCES ON:			たい キャイイ し	r. HH				_,
X=±	$x.x=\pm$	$X.XX = \pm$	G	佳邦科技	瓦股 ′	分	有 限	:公『	到
ANGLES=±		HOLEDIA=±		INPAQ TEC	CHNO	LOG	Y CO)., LT <u>C</u>	ס.
SCALE:		UNIT: mm		GS AND SPECIFICAT					
DRAWN BY:	格拓夫	CHECKED BY:赵付辉		CO.,LTD.AND SHA					
DESIGNED BY	:陈光芒	APPROVED BY:赵付辉	DEVICES WITH	IOUT PERMISSION					
TITI F : WA-P-	TITLE: WA-P-LE-03-042 Specification		DOCUMEN.	Т				PAGE	REV.
THEE THAT TEE-00-042 Openication		NO.					P4	Į.	
					PAGE	1	F	7	

characteristics were measured under the model's handset testing.

4-1. Frequency Band:

Frequency Band	MHz
WIFI 6E	2400-2500MHz&5150-5850MHz&5925-7125MHz

4-2. Impedance

50 ohm nominal

4-3. Matching circuit

None

4-4. Return Loss


4-4.1 Measuring Method

- 1.A $50\,\Omega$ coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the Return Loss
- 2. Keeping this jig away from metal at least 20cm

4-4.2 Measurement frequency points and Return Loss value

Frequency (l	Jnit MHz)	2400	2450	2500	5150	5850	7125
Return Loss	WIFI 6E	-12.69	-14.47	-17.89	-14.82	-14.23	-34.15

UNLESS OTHER	SPECIFIED	TOLERANCES ON :		P. P. Barrier	.				
X=±	$\mathbf{X}.\mathbf{X} = \pm$	$X.XX=\pm$	🤼 佳邦科技股份有限公						
ANGLES=±		HOLEDIA=±		INPAQ TECHNO	OLOG	Y CO	., LTD.		
SCALE:		UNIT: mm		S AND SPECIFICATIONS					
DRAWN BY:身	各拓夫	CHECKED BY:赵付辉	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR U AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS						
DESIGNED BY	:陈光芒	APPROVED BY:赵付辉	DEVICES WITHOUT PERMISSION						
TITI E · WA-D-I	TITLE: WA-P-LE-03-042 Specification		DOCUMENT				PAGE REV.		
TITLE: WA-F-LE-03-042 Specification		NO.				P4			
				PAG	E 2	F	7		

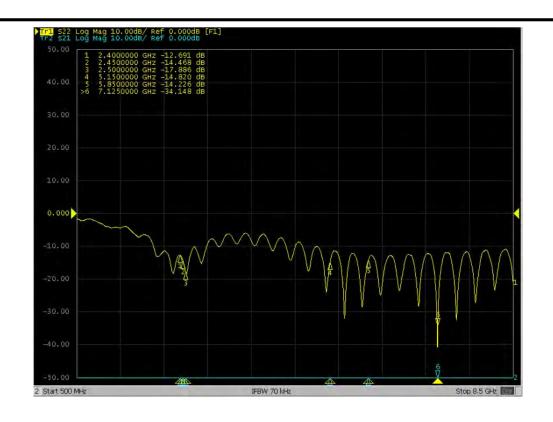


UNLESS OTHER SPECIFIED TOLERANCES ON : $X=\pm \qquad X.X=\pm \qquad X.XX=\pm$	G	生邦科技						
ANGLES=± HOLEDIA=±		INPAQ TECH	NOL	.OG	Y CC)., LTD.		
SCALE: UNIT: mm		S AND SPECIFICATION						
DRAWN BY:骆拓夫 CHECKED BY:赵付辉	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR							
DESIGNED BY:陈光芒 APPROVED BY:赵付辉	DEVICES WITH	OUT PERMISSION						
TITLE: WA-P-LE-03-042 Specification	DOCUMENT					PAGE REV.		
THEE . WA-1 -EE-00-042 Opecification	NO.					P4		
		P	AGE	3	F	7		

4-5. Efficiency and Gain

4-5.1 Measure method

- 1. Using a low loss coaxial cable to link a standard handset
- 2. Fixed this handset jig on chamber's rotator plane
- 3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
- 4. Using another standard gain horn antenna to calibrated those data

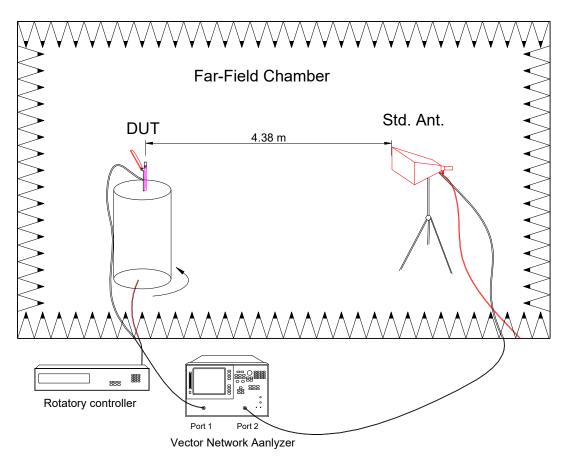

4-5.2 Chamber definition

- 1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
- 2. The quite room region is 40cmx40cmx40cm at the center of rotator
- 3. The distance between DUT and standard antenna is 4.38 m
- 4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

4-5.3 Efficiency and Gain


UNLESS OTHER S	UNLESS OTHER SPECIFIED TOLERANCES ON:			たい チャイバ たい	++ /		<u> </u>	,t -	_,
$X=\pm$ X	$\mathbf{X} = \pm$	$X.XX = \pm$		佳邦科技	投1	分1	1 限	公门	到
ANGLES=±	I	HOLEDIA=±		INPAQ TECH	NOL	.OG	Y CO	., LTI	D .
SCALE:		UNIT: mm		S AND SPECIFICATION					
DRAWN BY:骆	拓夫	CHECKED BY:赵付辉	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR						
DESIGNED BY:	陈光芒	APPROVED BY:赵付辉	DEVICES WITH	OUT PERMISSION					
TITI F : WA-P-I F	-03-042 S	pecification	DOCUMENT					PAGE	REV.
TITLE: WA-P-LE-03-042 Specification		NO.					P	1	
				P.A	GE	4	F	7	


Antenna gain is marked (dBi) and is based on STANDARD HORN antenna. The data shows Peak Gain and Average Gain.


Antenna type		PCB						
Frequency (MHz)	2400	2450	2500	5150	5850	7125		
Efficiency (%)	51.88	45.71	48.19	9 46.56 44.7		40.51		
Peak Gain (dBi)	5.26	3.98	4.36 5.16 5.42		5.42	6.67		
Frequency (MHz)		2400~2500			5150~5850			
Peak Gain (Max)	5.41dBi			6.09	6.67dBi			

4-6. 3D/2D Radiation Pattern Results

> 3D Radiation Pattern Results










> 2D Radiation Pattern Results


UNLESS OTHER SPECIFIED	TOLERANCES ON:		/	H /				
$X=\pm$ $X.X=\pm$	$X.XX=\pm$	G	佳邦科技凡	文 化	分手	可限	公	司
ANGLES=±	HOLEDIA=±		INPAQ TECHN	IOL	.OG	Y CO	., LTI	D.
SCALE:	UNIT: mm		S AND SPECIFICATIONS					
DRAWN BY:骆拓夫 CHECKED BY:赵付辉			CO.,LTD.AND SHALL NO FOR THE MANUFACTUR					
DESIGNED BY:陈光芒	APPROVED BY:赵付辉	DEVICES WITH	OUT PERMISSION					
TITLE: WA-P-LE-03-042	TITLE: WA-P-LE-03-042 Specification						PAGE	REV.
TITLE: WA-F-LE-03-042 Specification		NO.					P4	4
			PAG	GΕ	5	F	7	







> Physical coordinate Image

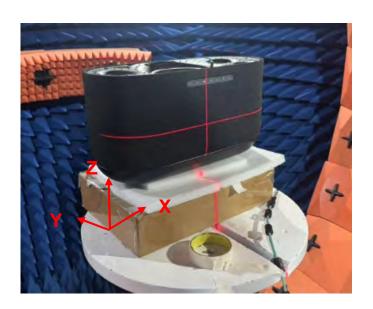


5.Mechanical Specification:

UNLESS OTHER SPECIFIED	TOLERANCES ON :		/	7.4 <u>-</u>	_ P		
$X=\pm$ $X.X=\pm$	$x.xx=\pm$	(Ja	佳邦科技股	份有	引限	公司	到
ANGLES=±	HOLEDIA=±		INPAQ TECHNO	LOG	Y CO	., LTI	ס.
SCALE:	UNIT: mm		S AND SPECIFICATIONS AF				
DRAWN BY:骆拓夫 CHECKED BY:赵付辉			CO.,LTD.AND SHALL NOT FOR THE MANUFACTURE (
DESIGNED BY:陈光芒	APPROVED BY:赵付辉	DEVICES WITHOUT PERMISSION					
TITLE : WA-D-I E-03-042	TITLE: WA-P-LE-03-042 Specification					PAGE	REV.
THEE: WA-F-LE-03-042 Specification		NO.				P	Į.
			PAGE	6	F	7	

5-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing Figure 5-1-1

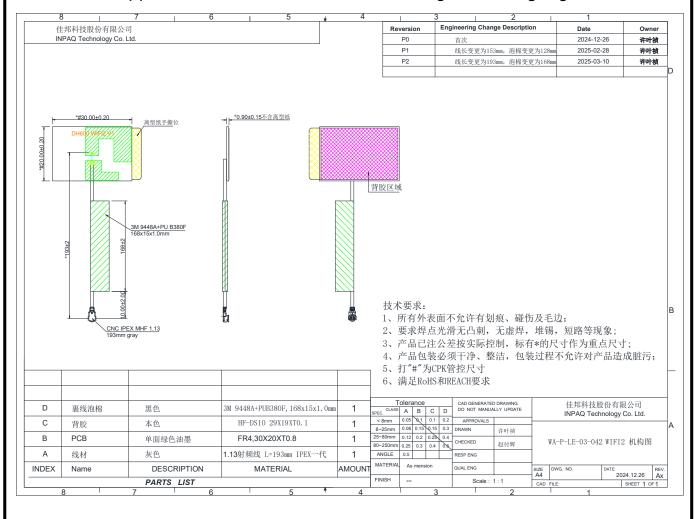

ANGLES=± HOLEDIA=± SCALE: UNIT: mm THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TECHNOLOGY CO., LTD.AND SHALL NOT BE REPRODUCED OR AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARAT DEVICES WITHOUT PERMISSION TITLE: WA-P-LE-03-042 Specification INPAQ TECHNOLOGY CO., LTD.AND SHALL NOT BE REPRODUCED OR AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARAT DEVICES WITHOUT PERMISSION DOCUMENT NO.									
ANGLES=± HOLEDIA=± SCALE: UNIT: mm DRAWN BY: 骆拓夫 DESIGNED BY: 陈光芒 APPROVED BY: 赵付辉 TITLE: WA-P-LE-03-042 Specification INPAQ TECHNOLOGY CO., LT THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARAT DEVICES WITHOUT PERMISSION DOCUMENT NO.	UNLESS OTHER SPECIFI	D TOLERANCES ON :		た シロイバ た	HH //	· -	→ ਸ—	, t -	
SCALE: UNIT: mm DRAWN BY: 骆拓夫 CHECKED BY: 赵付辉 DESIGNED BY: 陈光芒 APPROVED BY: 赵付辉 TITLE: WA-P-LE-03-042 Specification THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARAT DEVICES WITHOUT PERMISSION DOCUMENT NO.	$X=\pm$ $X.X=\pm$	$X.XX = \pm$	G	【【【 佳邦科技股份有限公					
DRAWN BY:骆拓夫 CHECKED BY:赵付辉 DESIGNED BY:陈光芒 APPROVED BY:赵付辉 TITLE:WA-P-LE-03-042 Specification CHECKED BY:赵付辉 TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARAT DEVICES WITHOUT PERMISSION DOCUMENT NO.	ANGLES=±	HOLEDIA=±		INPAQ TECH	NOL	OG'	Y CO	., LTI) .
DESIGNED BY: 陈光芒 APPROVED BY: 赵付辉 DEVICES WITHOUT PERMISSION TITLE: WA-P-LE-03-042 Specification PAGE NO.	SCALE:	UNIT: mm							
TITLE: WA-P-LE-03-042 Specification DOCUMENT NO.	DRAWN BY:骆拓夫	CHECKED BY:赵付辉	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR US AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS (
TITLE: WA-P-LE-03-042 Specification NO.	DESIGNED BY:陈光芒	APPROVED BY:赵付辉							
NO.	TITLE · WA-D-LE-03-04	TITLE: WARLE 02 042 Specification						PAGE	REV.
PAGE 7 E 7	THEE: WA-1 -LE-03-042 Opecification		NO.					P4	1
FAGE / I /				P	AGE	7	F	7	