WA-P-LA-01-108 Specification

1. Explanation of part number:

$$\frac{WA}{(1)}$$
 $\frac{P}{(2)}$ $\frac{LA}{(3)}$ $\frac{01}{(4)}$ $\frac{108}{(5)}$

- (1) Product Type: PCB Antenna
- (2) Material: PCB+ Cable
- (3) Frequency:2400-2500MHz
- (4) Coaxial Cable Type:01
- (5) Gain (Peak) : 3.04dBi
- (6) Suffix:108
- (7) Company address: INPAQ TECHNOLOGY(SUZHOU) CO, LTD. No. 5, Chunqiu

Road, Huangdai Town, Xiangcheng District, Suzhou City, Jiangsu Province, China

2. Storage Condition:

Temperature -40 to +70 °C Humidity 65 ± 20 % RH

3. Operating Condition:

Temperature -40 to +70 °C Humidity 65±20 % RH

4. Electrical Specification:

Those specifications were specially defined for 迪芬尼 DH600 BT model, and all characteristics were measured under the model's handset testing.

UNLESS OTHER SPECIFIED	TOLERANCES ON:		LL 40 71 LL 1	· · ·	<i>r.</i>	<u> </u>	, t -	
$X=\pm$ $X.X=\pm$	$X.XX=\pm$		佳邦科技用	女 1	分月	目 限	:公〕	司
ANGLES=±	HOLEDIA=±		INPAQ TECHN	10I	_OG	Y CO	., LTI	D.
SCALE:	UNIT: mm		S AND SPECIFICATIONS					
DRAWN BY:骆拓夫	CHECKED BY:赵付辉		CO.,LTD.AND SHALL N FOR THE MANUFACTUR					
DESIGNED BY:陈光芒	APPROVED BY:赵付辉	DEVICES WITH	OUT PERMISSION					
TITLE: WA-P-LA-01-108 Specification				PAGE	REV.			
111122 · WA-1 -2A-01-100 ·		NO.					P:	3
			PA	GE	1	F	6	

4-1. Frequency Band:

Frequency Band	MHz
BT	2400-2500MHz

4-2. Impedance

50 ohm nominal

4-3. Matching circuit

None

4-4. Return Loss


4-4.1 Measuring Method

- 1.A $50\,\Omega$ coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the Return Loss
- 2. Keeping this jig away from metal at least 20cm

4-4.2 Measurement frequency points and Return Loss value

Frequency (Unit MHz)		2400	2450	2500	
Return Loss	ВТ	-18.29	-17.91	-16.18	


UNLESS OTHER SPECIFIED	TOLERANCES ON :		FF 500	P P	. ===	—
$X=\pm$ $X.X=\pm$	$X.XX = \pm$	G	佳邦科技股	份犭	手限	公司
ANGLES=±	HOLEDIA=±		INPAQ TECHNO			
SCALE:	UNIT : mm		GS AND SPECIFICATIONS AR			
DRAWN BY:骆拓夫	CHECKED BY:赵付辉		CO.,LTD.AND SHALL NOT I			
DESIGNED BY:陈光芒	APPROVED BY:赵付辉	DEVICES WITH	IOUT PERMISSION			
TITLE: WA-P-LA-01-108 Specification		DOCUMEN.	Т			PAGE REV.
THEE TWA-1 -EA-01-100 opecification		NO.				P3
			PAGE	2	F	6

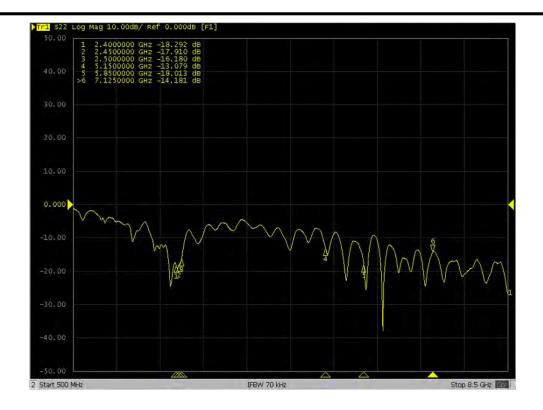

4-5. Efficiency and Gain

4-5.1 Measure method

- 1. Using a low loss coaxial cable to link a standard handset
- 2. Fixed this handset jig on chamber's rotator plane
- 3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
- 4. Using another standard gain horn antenna to calibrated those data

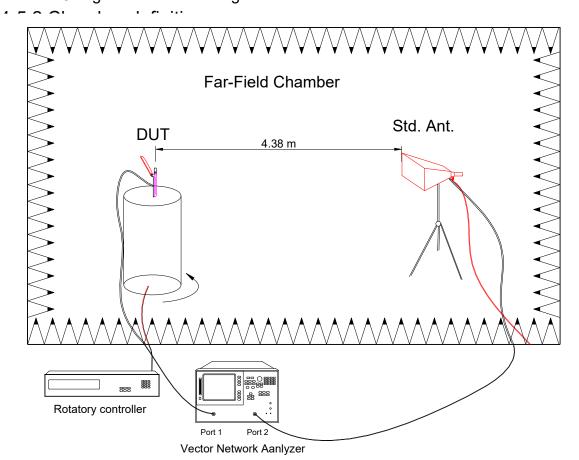

- 1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
- 2. The quite room region is 40cmx40cmx40cm at the center of rotator
- 3. The distance between DUT and standard antenna is 4.38 m
- 4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)


4-5.3 Efficiency and Gain

Antenna gain is marked (dBi) and is based on STANDARD HORN antenna. The data shows Peak Gain and Average Gain.


Antenna type	PCB				
Frequency (MHz)	2400	2400 2450			
Efficiency (%)	49.9	43.96	47.5		
Peak Gain (dBi)	3.04	0.29	1.56		
Frequency (MHz)	2400~2500				
Peak Gain (Max)	3.04dBi				

4-6. 3D/2D Radiation Pattern Results


> 3D Radiation Pattern Results

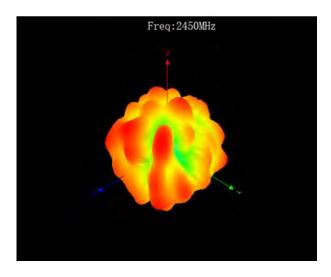

> 2D Radiation Pattern Results

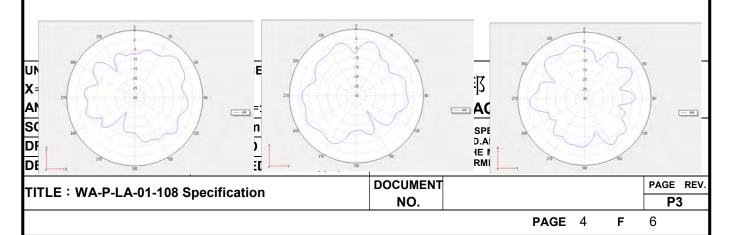

> Physical coordinate Image

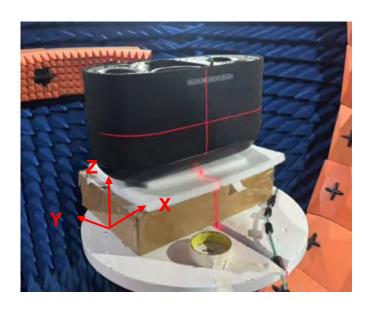


UNLESS OTHER SPECIFIE	ED TOLERANCES ON:		LL	1.7 .		
$X=\pm$ $X.X=\pm$	$X.XX=\pm$	G ₂	佳邦科技股	份	月 限	公司
ANGLES=±	HOLEDIA=±		INPAQ TECHNO	LOC	SY CO)., LTD.
SCALE:	UNIT: mm		S AND SPECIFICATIONS AF			
DRAWN BY:骆拓夫	CHECKED BY:赵付辉		CO.,LTD.AND SHALL NOT FOR THE MANUFACTURE (
DESIGNED BY:陈光芒	APPROVED BY:赵付辉	DEVICES WITH	OUT PERMISSION			
TITLE: WA-P-LA-01-10	8 Specification	DOCUMENT				PAGE REV.
11122 · WA-1 -EA-01-10	o opecinication	NO.				P3
			PAGE	5	F	6

5. Mechanical Specification:

5-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing Figure 5-1-1

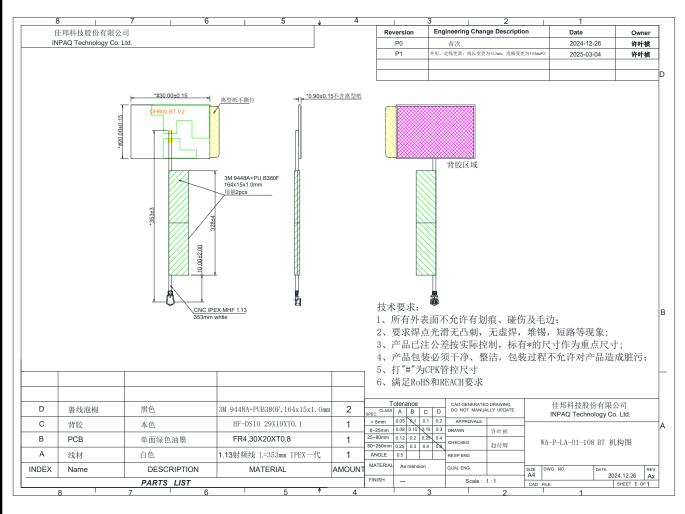

UNLESS OTHER SI	PECIFIED	TOLERANCES ON:		11. AH 41. 1	.t. ##	/s3 _		—
$X=\pm$ X.	\pm	$X.XX=\pm$	G	佳邦科技	支 股 ′	分り	有限	:公司
ANGLES=±		HOLEDIA=±		INPAQ TE	CHNO	LOG	Y CC)., LTD.
SCALE:		UNIT: mm		GS AND SPECIFICA				
DRAWN BY:骆邦	石夫	CHECKED BY:赵付辉	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR					
DESIGNED BY :	陈光芒	APPROVED BY:赵付辉	DEVICES WITH	HOUT PERMISSION				
TITLE: WA-P-LA-01-108 Specification		DOCUMEN	IT				PAGE REV	
THEE THAT EACH TOO OPCOME		NO.					P3	
					PAGE	6	F	6