



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Arcadyan Technology Corporation
Applicant Address	No.8, Sec.2, Guangfu Rd.,Hsinchu, 30071 Taiwan
FCC ID	RAXWA8001BAC
Manufacturer's company	Arcadyan Technology Corporation
Manufacturer Address	No.8, Sec.2, Guangfu Rd.,Hsinchu, 30071 Taiwan

Product Name	4x4 Video bridge
Brand Name	AIRSONICS
Model No.	GXT542U
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Jan. 22, 2015
Final Test Date	Feb. 25, 2015
Submission Type	Original Equipment

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	6
3.6. Table for Testing Locations.....	7
3.7. Table for Supporting Units	8
3.8. Table for Parameters of Test Software Setting	9
3.9. EUT Operation during Test	10
3.10. Duty Cycle.....	10
3.11. Test Configurations	11
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	19
4.3. Maximum Conducted Output Power Measurement.....	30
4.4. Power Spectral Density Measurement	33
4.5. Radiated Emissions Measurement	41
4.6. Band Edge Emissions Measurement	62
4.7. Frequency Stability Measurement	71
4.8. Antenna Requirements	75
5. LIST OF MEASURING EQUIPMENTS	76
6. MEASUREMENT UNCERTAINTY.....	78
APPENDIX A. PHOTOGRAPHS OF EUT	A1 ~ A19
APPENDIX B. TEST PHOTOS.....	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~ C3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR511636AB	Rev. 01	Initial issue of report	Mar. 26, 2015

1. VERIFICATION OF COMPLIANCE

Product Name : 4x4 Video bridge
Brand Name : AIRSONICS
Model No. : GXT542U
Applicant : Arcadyan Technology Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 22, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

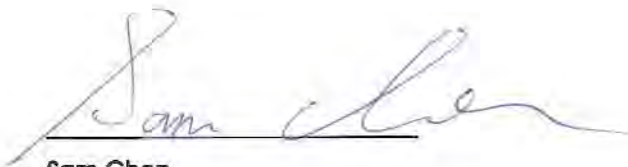

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	14.19 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	1.42dB
4.4	15.407(a)	Power Spectral Density	Complies	2.74 dB
4.5	15.407(b)	Radiated Emissions	Complies	3.05 dB
4.6	15.407(b)	Band Edge Emissions	Complies	1.10 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	<u>For Non-Beamforming Mode</u> IEEE 802.11a: 17.16 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 18.24 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT40): 37.40 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT80): 75.60 MHz <u>For Beamforming Mode</u> IEEE 802.11ac MCS0/Nss1 (VHT20): 18.24 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT40): 37.20 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT80): 75.60 MHz
Maximum Conducted Output Power	<u>For Non-Beamforming Mode</u> IEEE 802.11a: 27.57 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 27.45 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT40): 28.58 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT80): 20.47 dBm <u>For Beamforming Mode</u> IEEE 802.11ac MCS0/Nss1 (VHT20): 27.45 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT40): 27.03 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT80): 21.34 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
Beamforming Function	☒ With beamforming For 802.11n/ac.	☐ Without beamforming
Operating Mode	☐ Outdoor access point	
	☒ Indoor access point	
	☐ Fixed point-to-point access points	
	☐ Mobile and portable client devices	

Antenna and Band width

Antenna	Four (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS 0-9/Nss1-4
802.11ac (VHT40)	4	MCS 0-9/Nss1-4
802.11ac (VHT80)	4	MCS 0-9/Nss1-4
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT supports HT20 and HT40. Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80. Note 3: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac		

3.2. Accessories

Power	Brand	Model	Rating
Adapter	APD	WA-18G12U	Input:100-240V~50-60Hz 0.5A(Max) Output:12V, 1.5A

3.3. Table for Filed Antenna


Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	Airgain	N5x20SC-PK1-B30UR1	PIFA Antenna	I-PEX	-1.38
2	Airgain	N5x20SC-PK1-B30UR1	PIFA Antenna	I-PEX	-1.38
3	Airgain	N5x20SC-PK1-B30UR1	PIFA Antenna	I-PEX	-1.38
4	Airgain	N5x20SC-PK1-B30UR1	PIFA Antenna	I-PEX	-1.38

Note: The EUT has four antennas.

For IEEE 802.11a/n/ac mode (4TX/4RX)

Chain 1, Chain 2, Chain 3 and Chain 4 can be used as transmitting/receiving antenna.

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

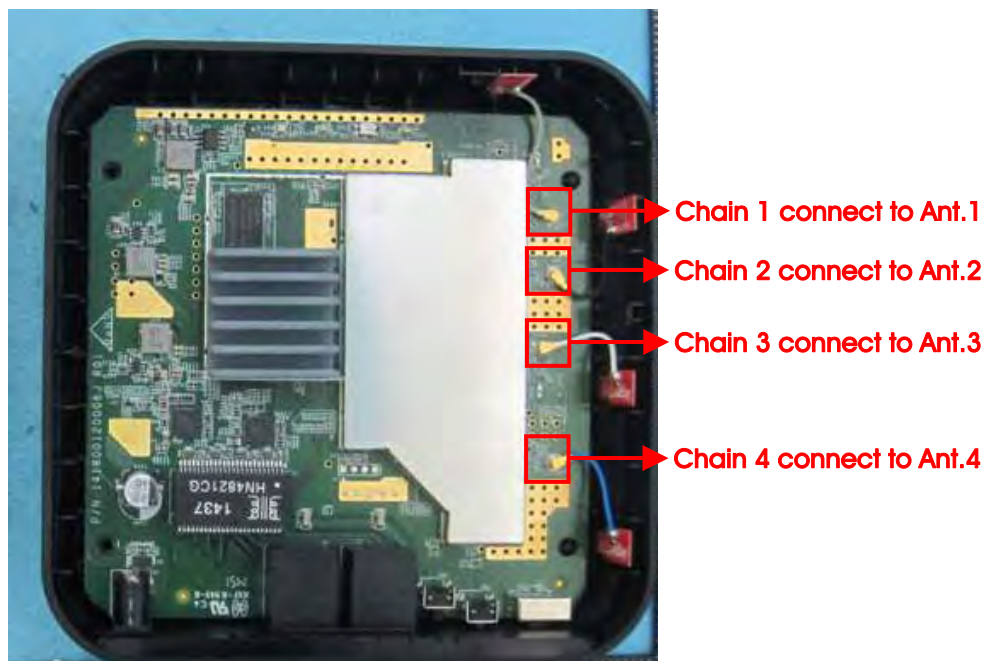

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Power Spectral Density	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Band Edge Emission	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Frequency Stability	20 MHz	Band 1	-	40	1+2+3+4
	40 MHz	Band 1	-	38	1+2+3+4
	80 MHz	Band 1	-	42	1+2+3+4

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note 2: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac. All test results were recorded in the report.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. AP Mode

Mode 2. STA Mode

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test (Below 1G):

Mode 1. AP Mode

Mode 2. STA Mode

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test (Above 1G):

Mode 1. CTX - EUT X axis

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB (Below 1G)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	E6430	DoC
AP	D-Link	DIR-860L	QDS-BRCM1049LE

For Test Site No: 03CH01-CB (Above 1G)

For Non-Beamforming Mode:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM

For Beamforming Mode:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	E6430	DoC
WLAN ac Dongle	Netgear	A6200	PY31220200

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook*2	DELL	E6430	DoC
AP	D-LINK	DIR-860L	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For Non-Beamforming Mode

Test Software Version	DOS		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5180 MHz	5200 MHz	5240 MHz
802.11a	22	22	22
802.11ac MCS0/Nss1 VHT20	21	22	22
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5190 MHz	5230 MHz	
	17	23	
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5210 MHz		
	14		

For Beamforming Mode

Test Software Version	DOS		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5180 MHz	5200 MHz	5240 MHz
802.11ac MCS0/Nss1 VHT20	21	22	22
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5190 MHz		5230 MHz
	15		21
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5210 MHz		
	15		

3.9. EUT Operation during Test

For Non-Beamforming Mode

The EUT was programmed to be in continuously transmitting mode.

For Beamforming Mode

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WLAN ac Dongle and transmit duty cycle no less 98%

3.10. Duty Cycle

For Non-Beamforming Mode


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	5.338	5.453	97.89%	0.09	0.19
802.11ac MCS0/Nss1 VHT20	4.980	5.022	99.16%	0.04	0.01
802.11ac MCS0/Nss1 VHT40	2.391	2.456	97.35%	0.12	0.42
802.11ac MCS0/Nss1 VHT80	1.104	1.195	92.38%	0.34	0.91

For Beamforming Mode

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	1.741	1.948	89.36%	0.49	0.57
802.11ac MCS0/Nss1 VHT40	0.872	1.050	83.09%	0.80	1.15
802.11ac MCS0/Nss1 VHT80	0.811	0.902	89.91%	0.46	1.23

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

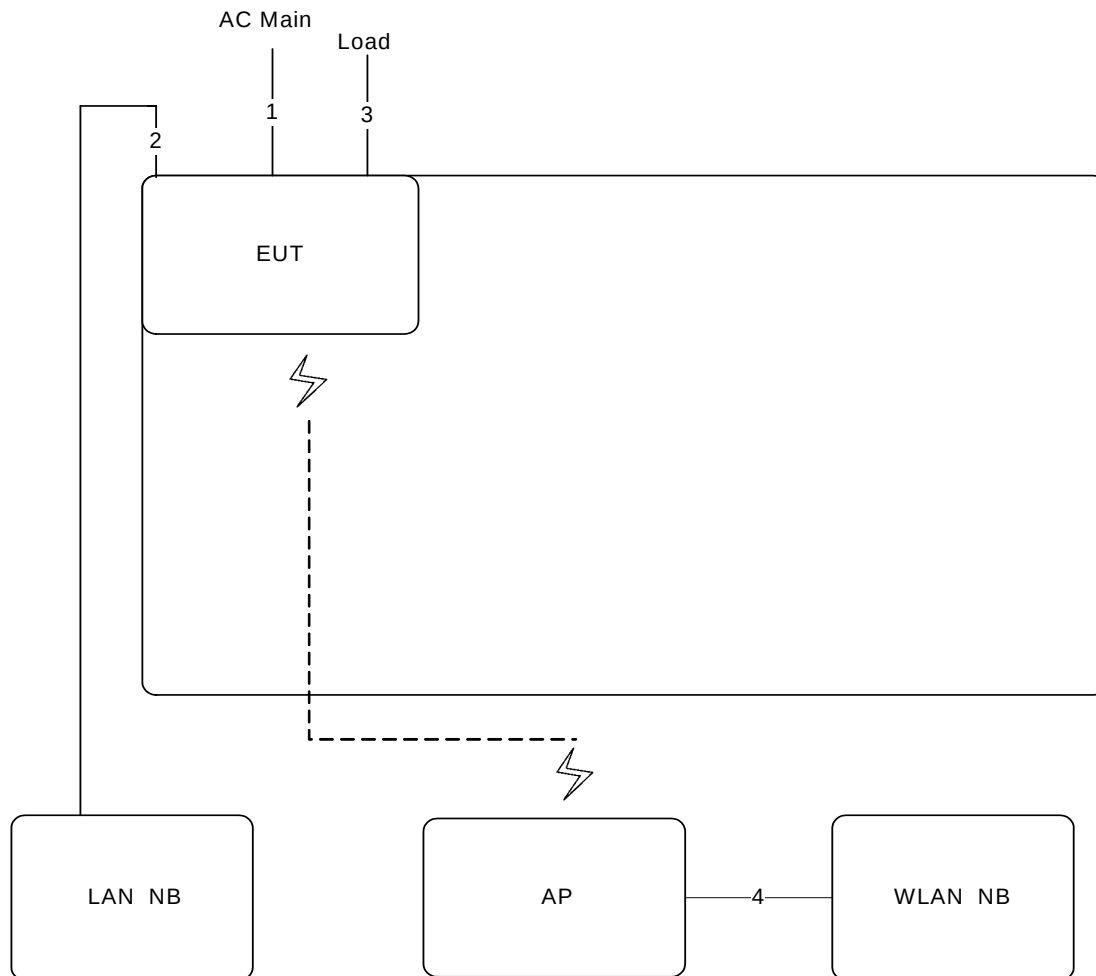

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	3m	Load
4	RJ-45 cable	No	3m	-

3.11.2. Radiation Emissions Test Configuration


Test Configuration: 30MHz ~1GHz

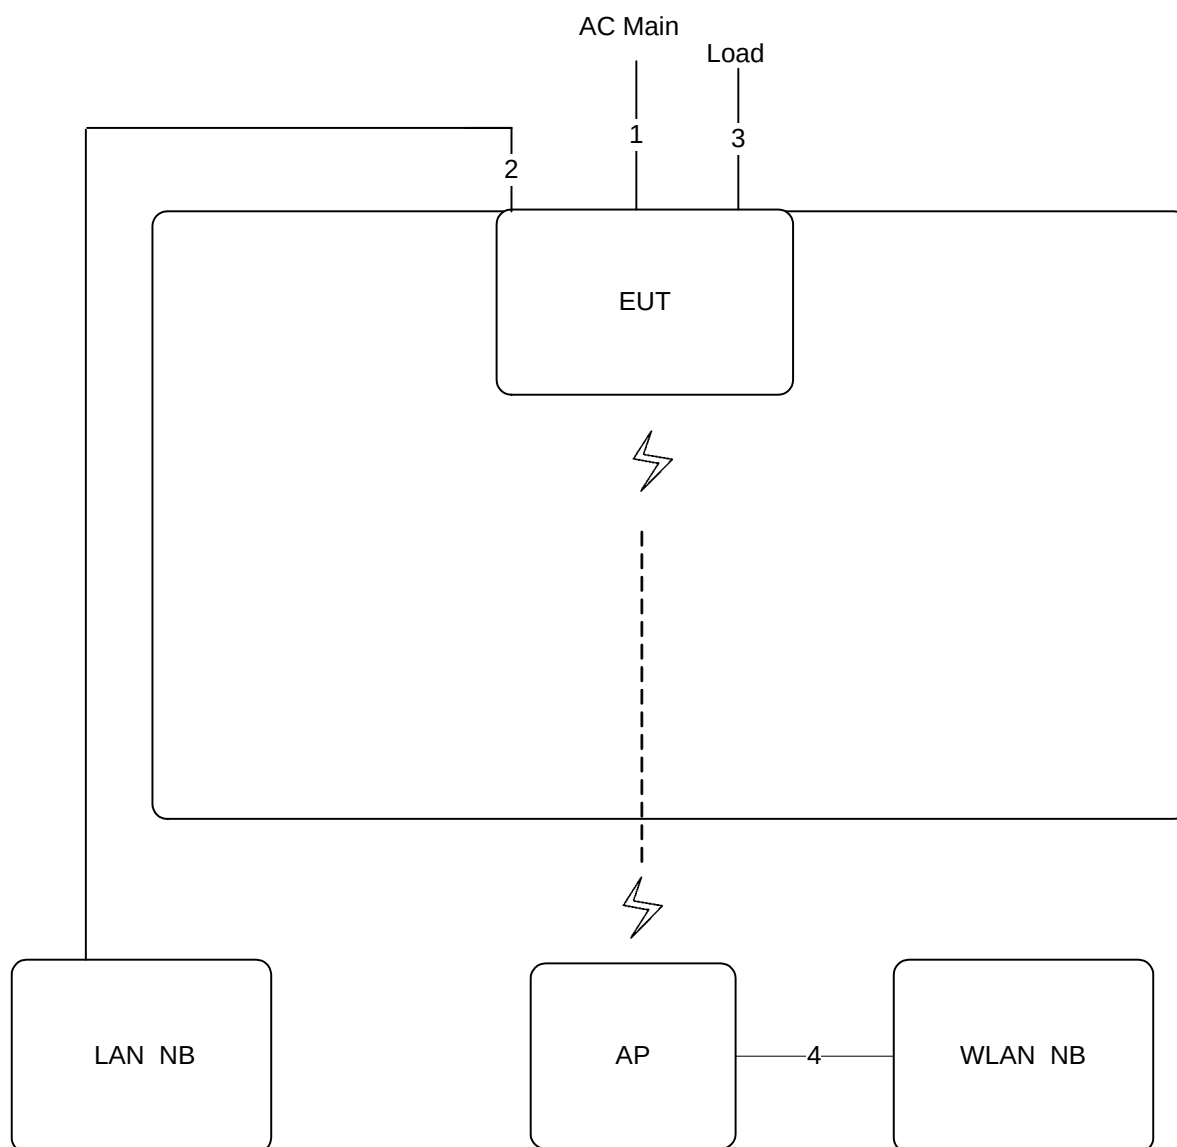

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	1m	Load
4	RJ-45 cable	No	3m	-


Test Configuration: above 1GHz

For Non-Beamforming mode

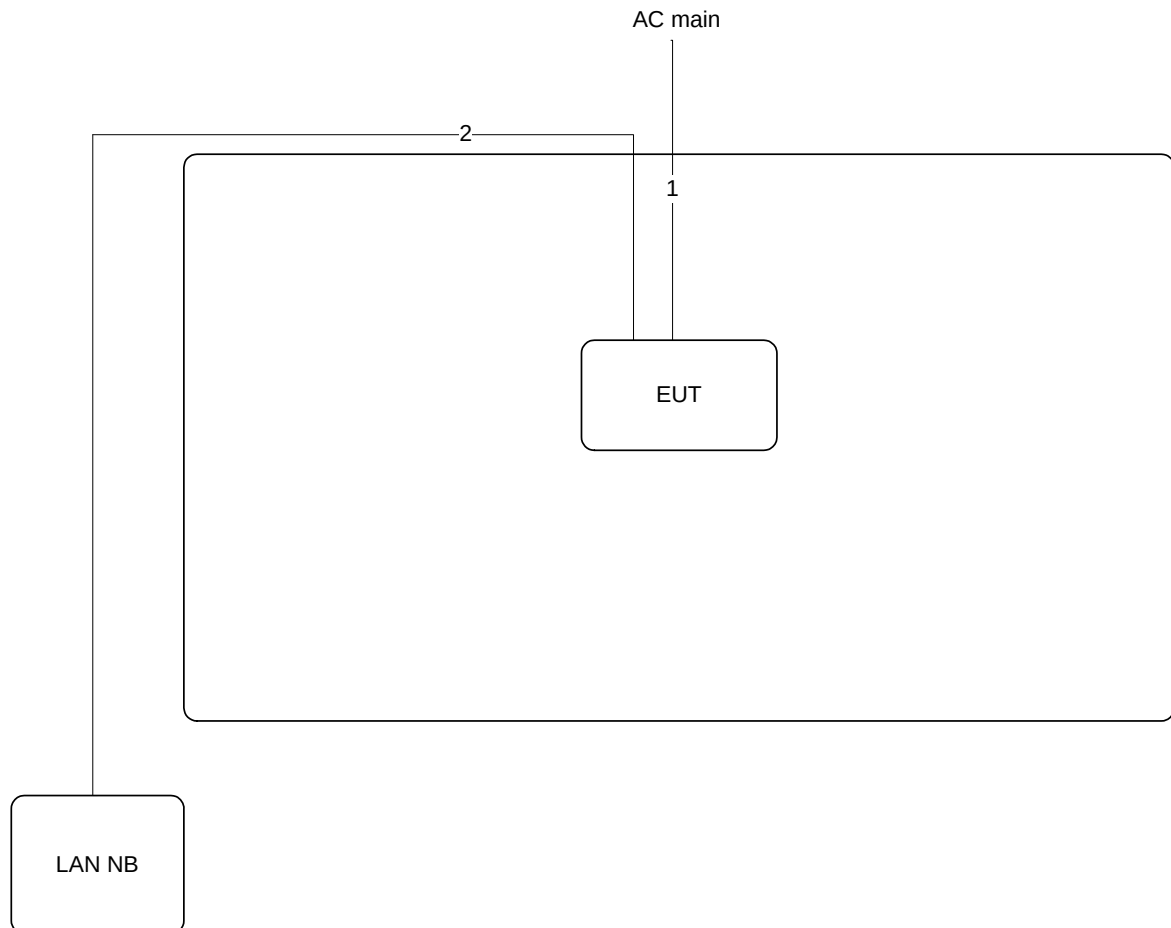

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

For Beamforming mode

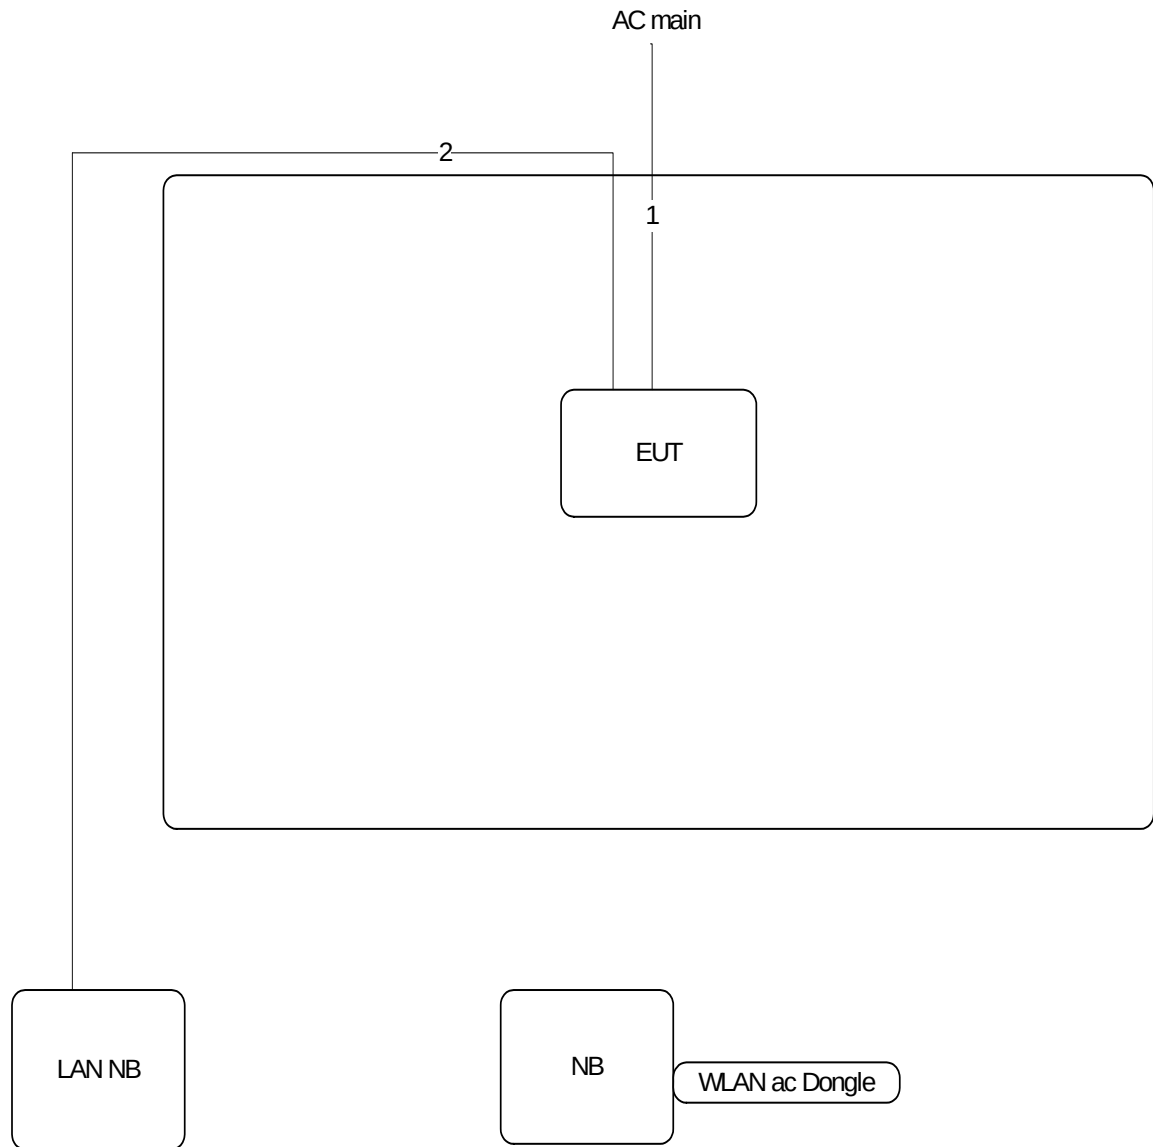

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

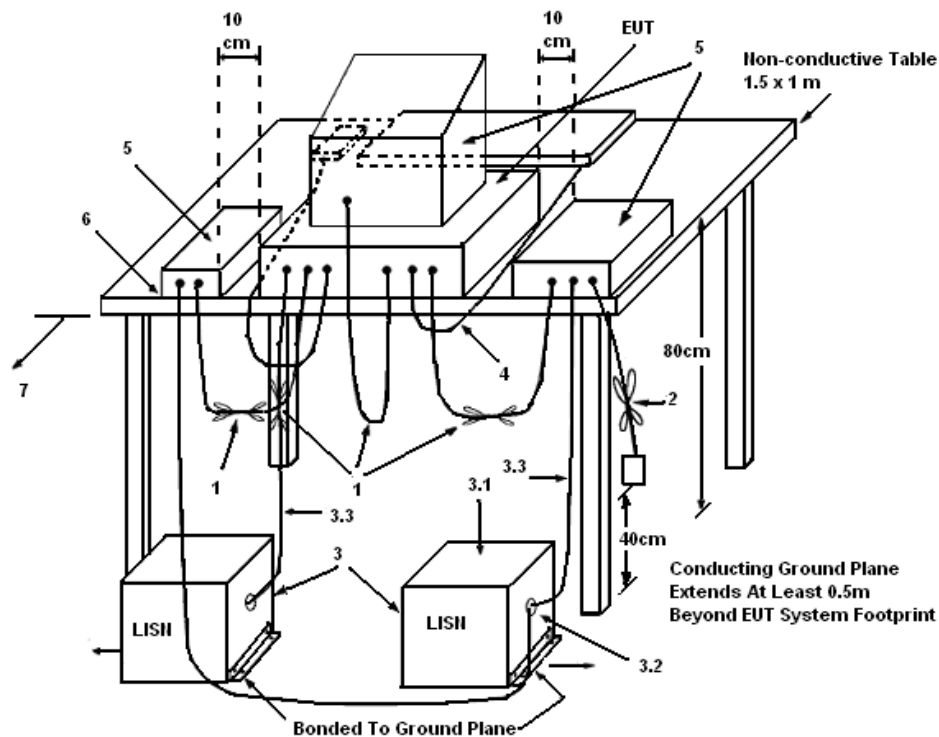

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	54%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

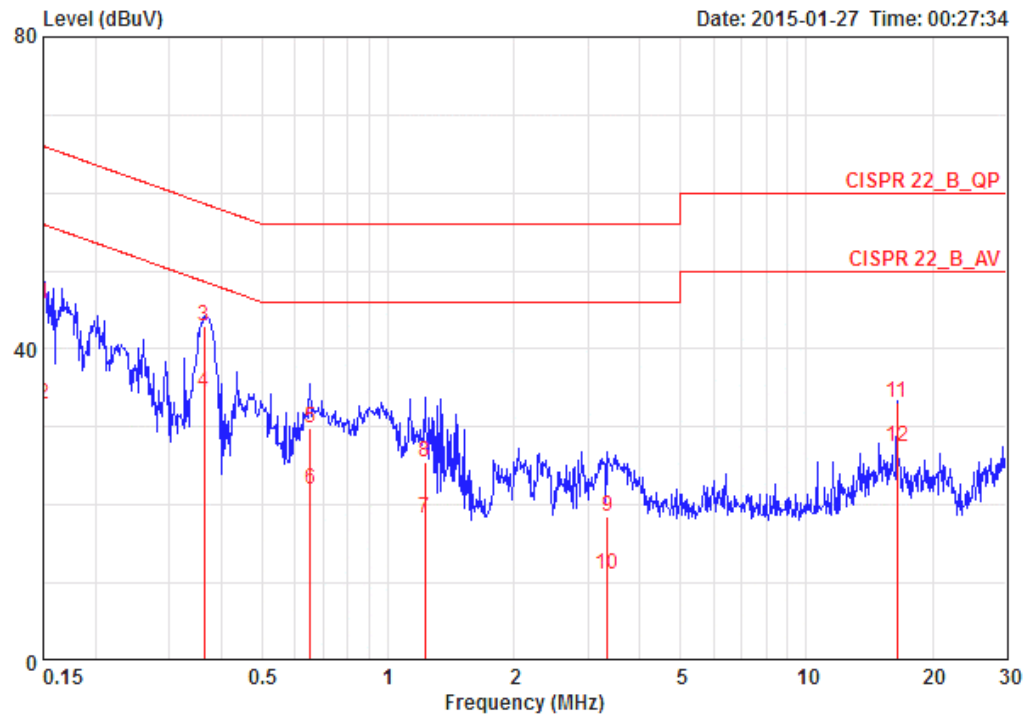

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark	Pol/Phase
			dB	dBuV	dBuV	dB	dB		
1	0.15000	45.78	-20.22	66.00	35.85	9.77	0.16	QP	LINE
2	0.15000	32.83	-23.17	56.00	22.90	9.77	0.16	AVERAGE	LINE
3	0.36338	42.98	-15.67	58.65	33.03	9.77	0.18	QP	LINE
4	0.36338	34.46	-14.19	48.65	24.51	9.77	0.18	AVERAGE	LINE
5	0.65084	29.85	-26.15	56.00	19.89	9.77	0.19	QP	LINE
6	0.65084	22.02	-23.98	46.00	12.06	9.77	0.19	AVERAGE	LINE
7	1.223	18.29	-27.71	46.00	8.31	9.76	0.21	AVERAGE	LINE
8	1.223	25.47	-30.53	56.00	15.49	9.76	0.21	QP	LINE
9	3.346	18.56	-37.44	56.00	8.55	9.72	0.29	QP	LINE
10	3.346	11.14	-34.86	46.00	1.13	9.72	0.29	AVERAGE	LINE
11	16.464	33.05	-26.95	60.00	23.09	9.49	0.47	QP	LINE
12	16.464	27.53	-22.47	50.00	17.57	9.49	0.47	AVERAGE	LINE

Temperature	24°C	Humidity	54%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

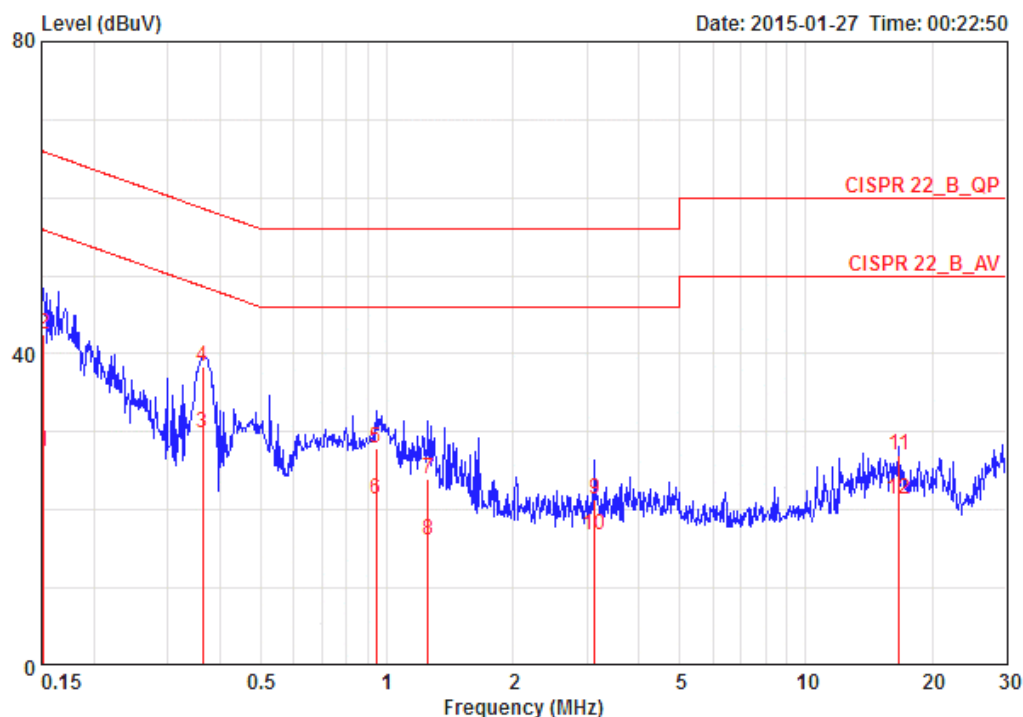

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15160	27.55	-28.36	55.91	17.47	9.92	0.16	AVERAGE	NEUTRAL
2	0.15160	42.59	-23.32	65.91	32.51	9.92	0.16	QP	NEUTRAL
3 @	0.36338	29.82	-18.83	48.65	19.73	9.91	0.18	AVERAGE	NEUTRAL
4	0.36338	38.40	-20.25	58.65	28.31	9.91	0.18	QP	NEUTRAL
5	0.94308	27.93	-28.07	56.00	17.81	9.92	0.20	QP	NEUTRAL
6	0.94308	21.29	-24.71	46.00	11.17	9.92	0.20	AVERAGE	NEUTRAL
7	1.255	24.00	-32.00	56.00	13.87	9.91	0.22	QP	NEUTRAL
8	1.255	16.17	-29.83	46.00	6.04	9.91	0.22	AVERAGE	NEUTRAL
9	3.140	21.31	-34.69	56.00	11.15	9.87	0.28	QP	NEUTRAL
10	3.140	16.82	-29.18	46.00	6.66	9.87	0.28	AVERAGE	NEUTRAL
11	16.661	27.11	-32.89	60.00	16.91	9.73	0.47	QP	NEUTRAL
12	16.661	21.37	-28.63	50.00	11.17	9.73	0.47	AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang		

For Non-Beamforming Mode


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	21.72	17.16
	5200 MHz	21.36	17.16
	5240 MHz	20.52	16.92
802.11ac MCS0/Nss1 VHT20	5180 MHz	22.68	18.24
	5200 MHz	22.56	18.24
	5240 MHz	22.44	18.24
802.11ac MCS0/Nss1 VHT40	5190 MHz	42.80	37.40
	5230 MHz	42.60	37.00
802.11ac MCS0/Nss1 VHT80	5210 MHz	80.40	75.60

For Beamforming Mode

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11ac MCS0/Nss1 VHT20	5180 MHz	23.16	18.24
	5200 MHz	23.64	18.24
	5240 MHz	23.16	18.24
802.11ac MCS0/Nss1 VHT40	5190 MHz	43.00	37.20
	5230 MHz	43.40	37.20
802.11ac MCS0/Nss1 VHT80	5210 MHz	80.40	75.60


For Non-Beamforming Mode

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5180 MHz

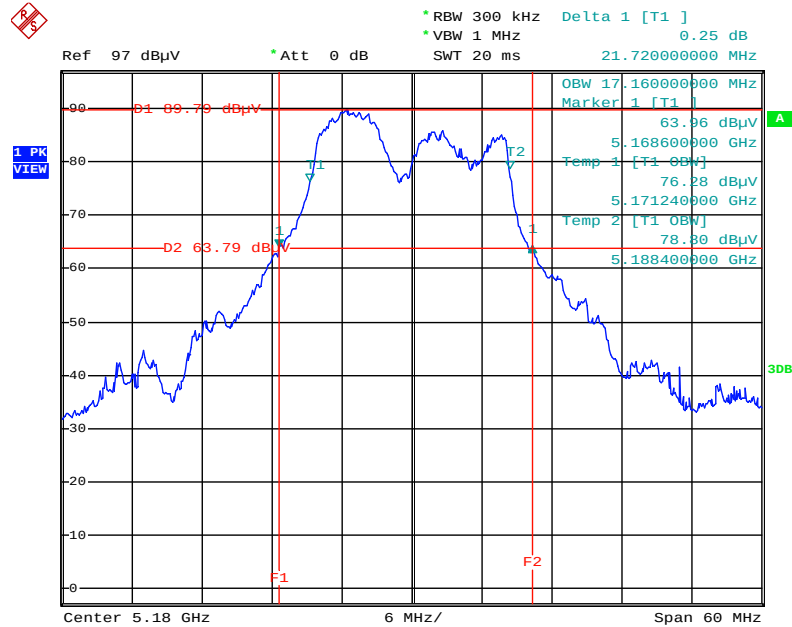


Date: 25.FEB.2015 19:07:43

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5200 MHz

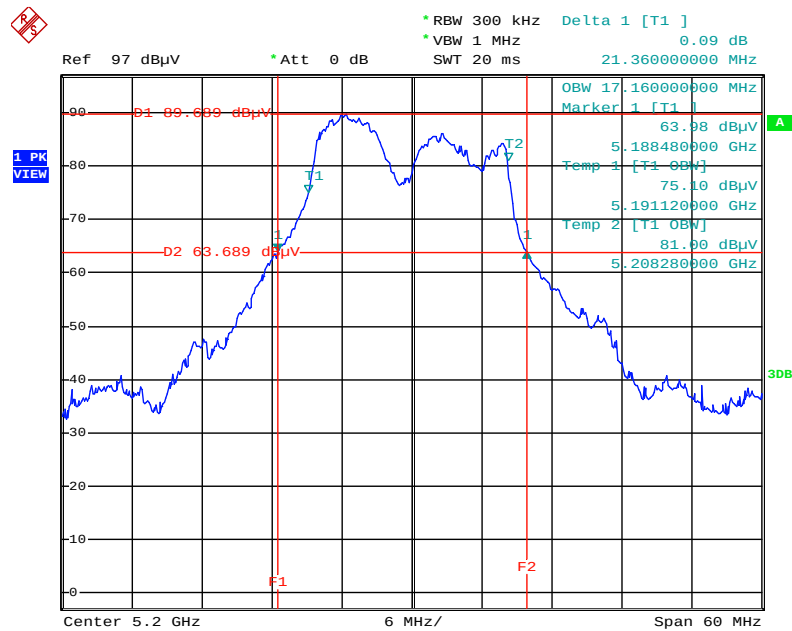


Date: 25.FEB.2015 19:07:06

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5240 MHz

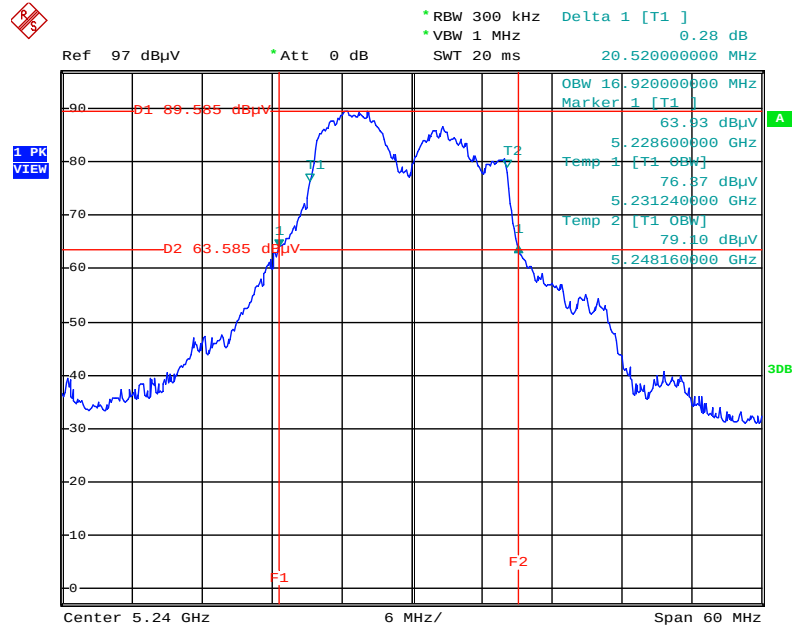


Date: 25.FEB.2015 19:06:26

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5180 MHz

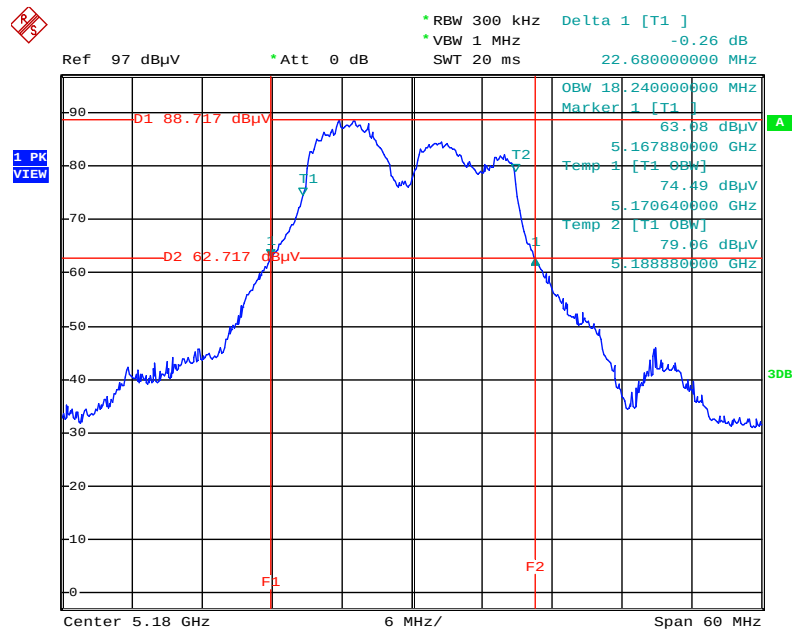


Date: 25.FEB.2015 19:14:24

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5200 MHz

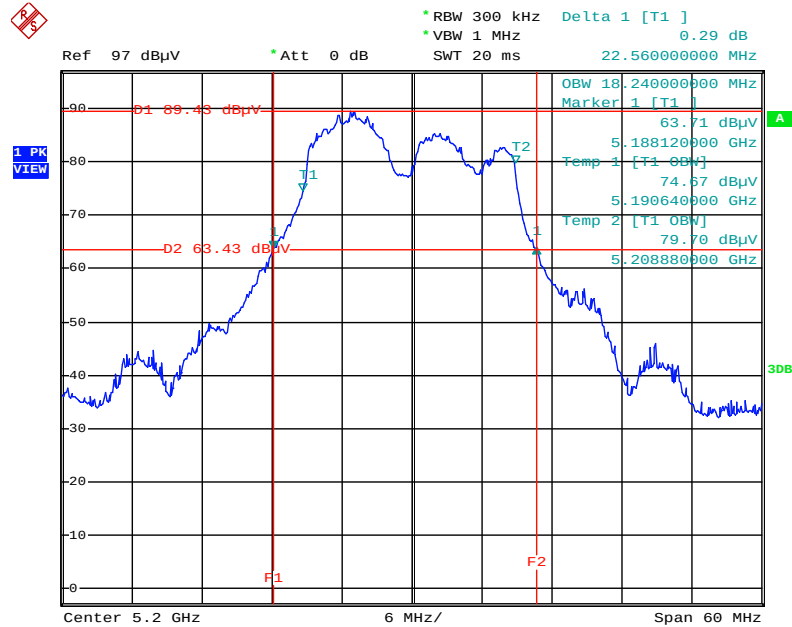


Date: 25.FEB.2015 19:15:22

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5240 MHz

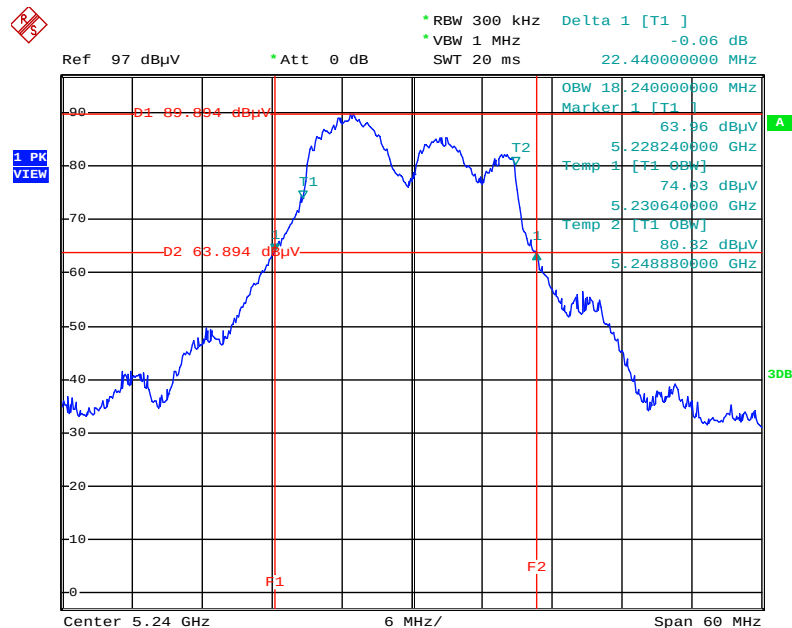


Date: 25.FEB.2015 19:15:57

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5190 MHz

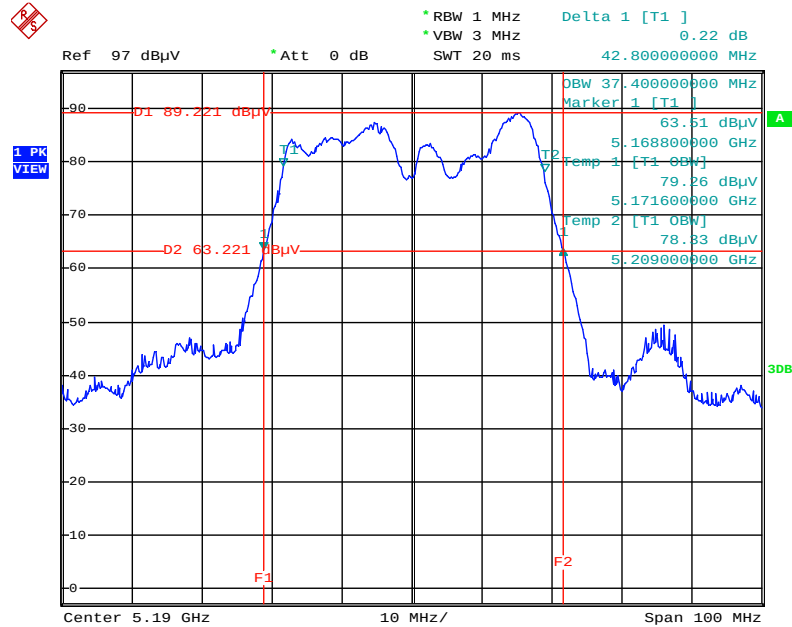


Date: 25.FEB.2015 19:29:58

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5230 MHz

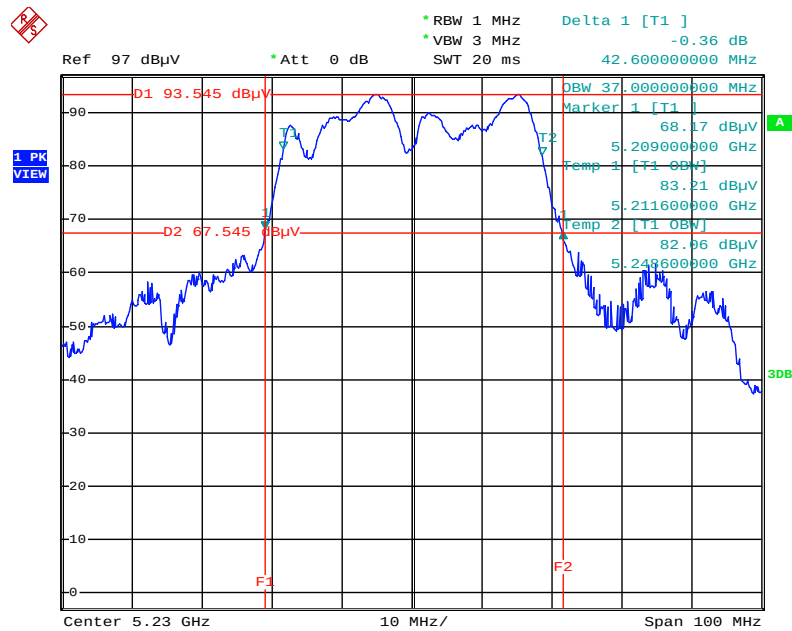

Date: 25.FEB.2015 19:30:39


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5210 MHz

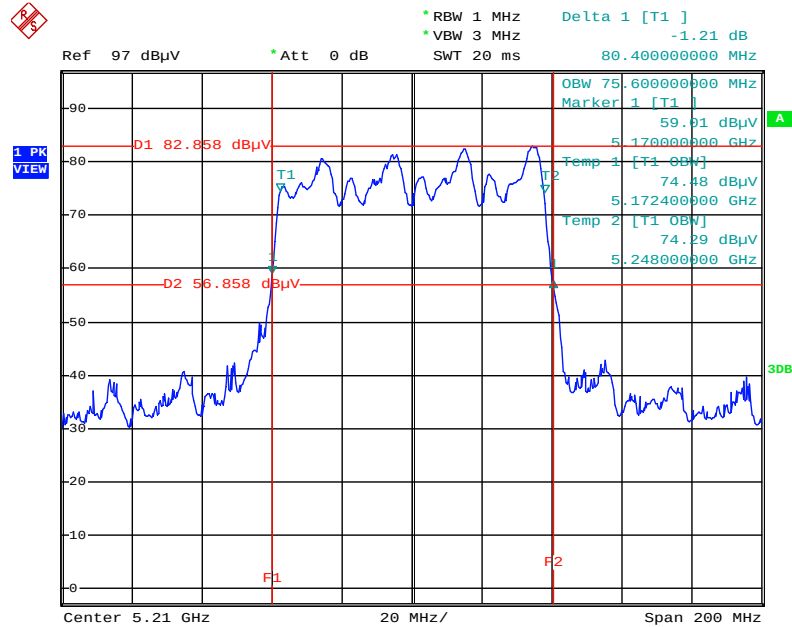

Date: 25.FEB.2015 19:53:24


For Beamforming Mode

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5180 MHz

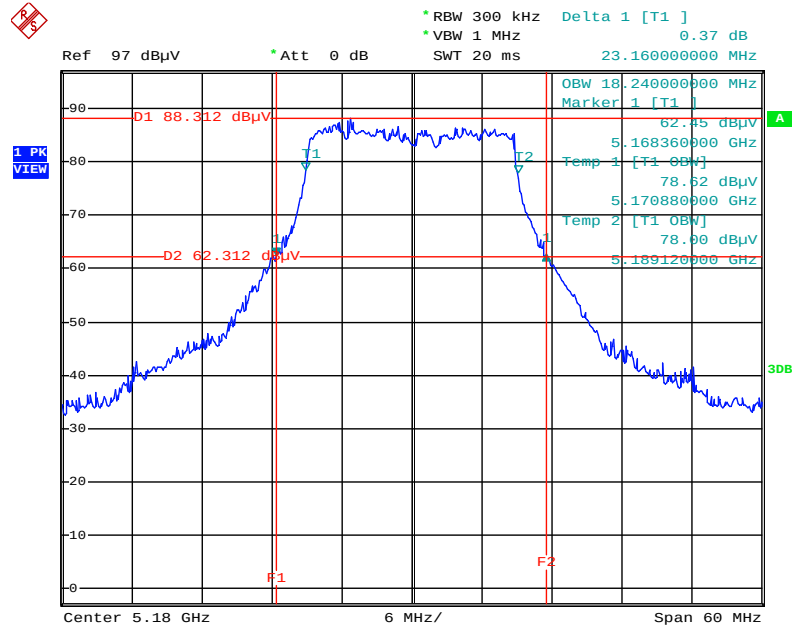


Date: 25.FEB.2015 20:14:04

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5200 MHz

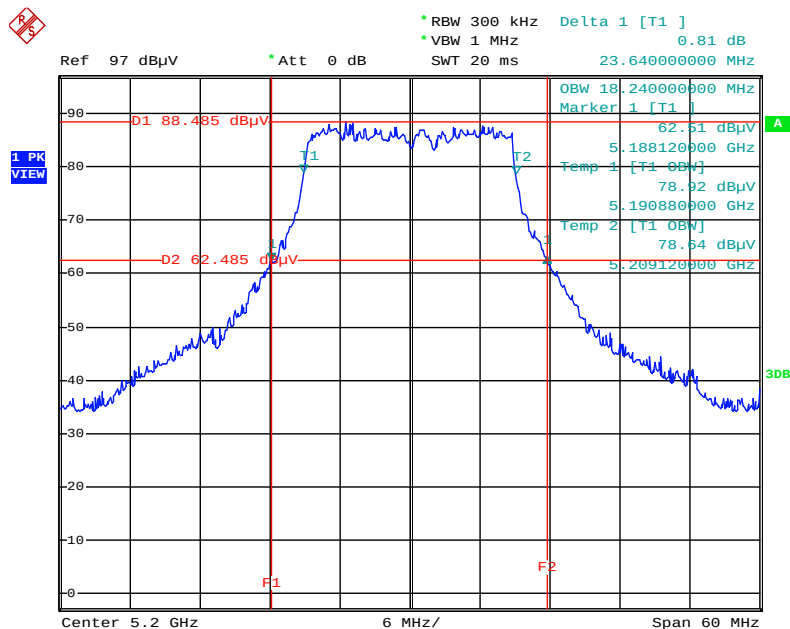


Date: 25.FEB.2015 20:14:40

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5240 MHz

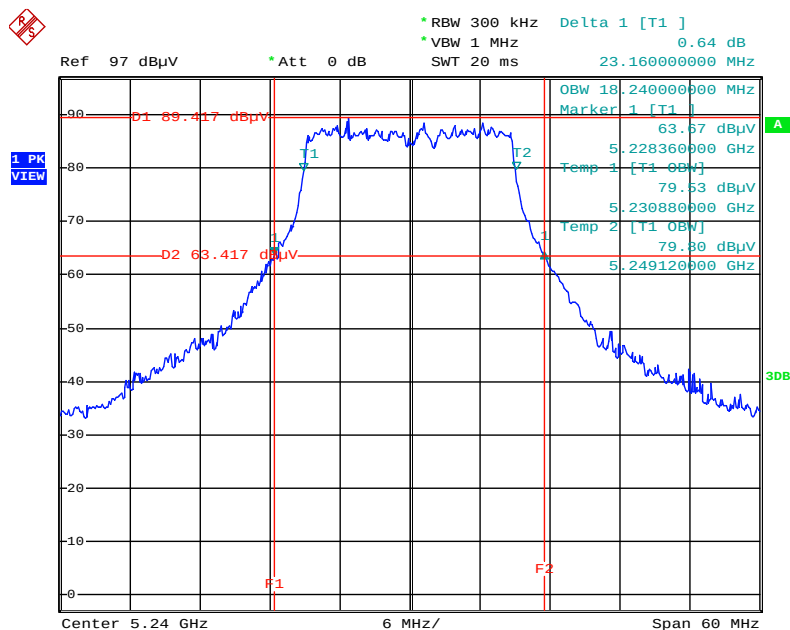


Date: 25.FEB.2015 20:15:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5190 MHz

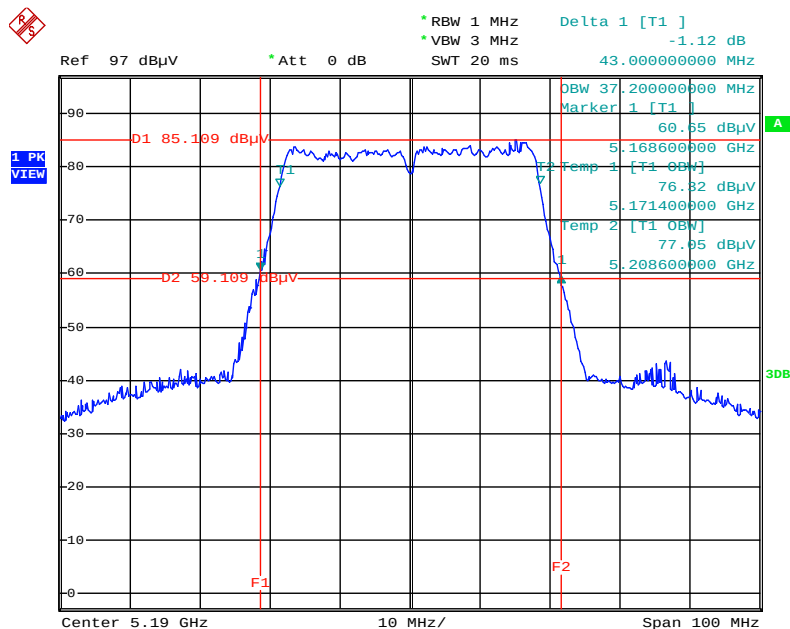


Date: 25.FEB.2015 20:09:02

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5230 MHz

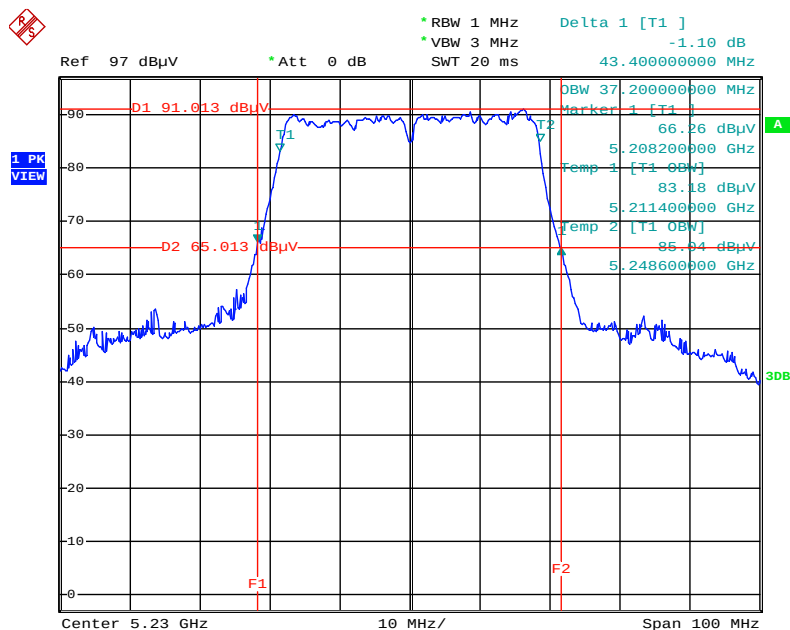

Date: 25.FEB.2015 20:09:34

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3+ Chain 4 / 5210 MHz

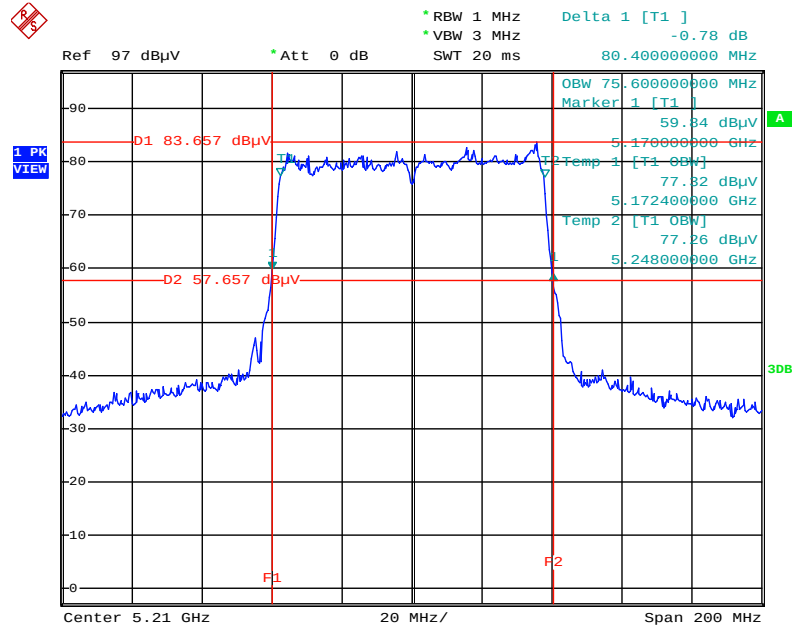

Date: 25.FEB.2015 20:05:17

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

Frequency Band		Limit
5.15~5.25 GHz		
Operating Mode		
☐	Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
☒	Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
☐	Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
☐	Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang	Test Date	Feb. 25, 2015

For Non-Beamforming Mode

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11a	5180 MHz	21.38	21.21	21.42	21.89	27.50	30.00	Complies
	5200 MHz	21.25	21.49	21.48	21.93	27.57	30.00	Complies
	5240 MHz	21.12	21.42	21.43	21.45	27.38	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	20.84	21.01	20.83	21.33	27.03	30.00	Complies
	5200 MHz	21.16	21.32	21.49	21.73	27.45	30.00	Complies
	5240 MHz	21.35	21.24	21.47	21.48	27.41	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	17.32	17.74	17.85	17.91	23.73	30.00	Complies
	5230 MHz	22.45	22.53	22.58	22.69	28.58	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	13.88	14.43	14.52	14.92	20.47	30.00	Complies

For Beamforming Mode

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac MCS0/Nss1 VHT20	5180 MHz	20.84	21.01	20.83	21.33	27.03	30.00	Complies
	5200 MHz	21.16	21.32	21.49	21.73	27.45	30.00	Complies
	5240 MHz	21.35	21.24	21.47	21.48	27.41	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	15.28	15.56	15.52	15.98	21.61	30.00	Complies
	5230 MHz	20.78	21.02	21.06	21.18	27.03	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	15.72	15.13	15.28	15.12	21.34	30.00	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.64\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

4.4. Power Spectral Density Measurement

4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band		Limit
5.15~5.25 GHz		
Operating Mode		
☐	Outdoor access point	17 dBm/MHz
☒	Indoor access point	17 dBm/MHz
☐	Fixed point-to-point access points	17 dBm/MHz
☐	Mobile and portable client devices	11 dBm/MHz

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

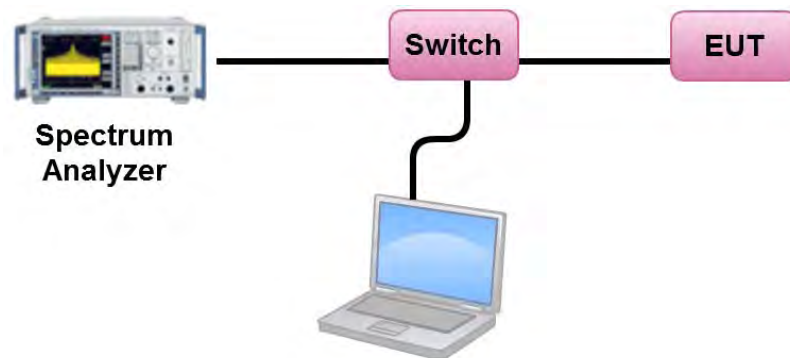

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang		

For Non-Beamforming Mode

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5180 MHz	14.26	17.00	Complies
	5200 MHz	14.26	17.00	Complies
	5240 MHz	14.19	17.00	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	13.63	17.00	Complies
	5200 MHz	14.08	17.00	Complies
	5240 MHz	14.05	17.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	7.25	17.00	Complies
	5230 MHz	12.52	17.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	2.04	17.00	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.64\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

For Beamforming Mode

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5180 MHz	13.63	17.00	Complies
	5200 MHz	14.08	17.00	Complies
	5240 MHz	14.05	17.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	5.07	17.00	Complies
	5230 MHz	10.49	17.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	3.59	17.00	Complies


Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.64 \text{dBi} < 6 \text{dBi}$, so the limit doesn't reduce.

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

For Non-Beamforming Mode


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4/ 5200 MHz

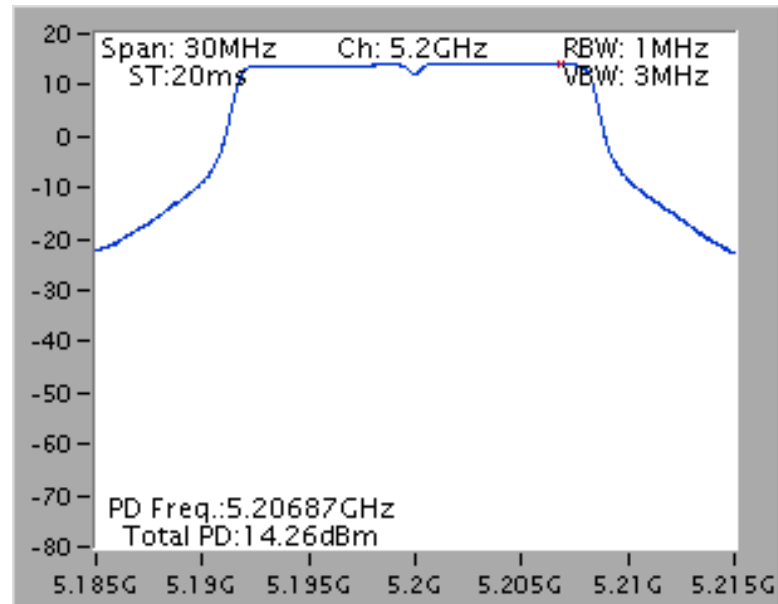


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

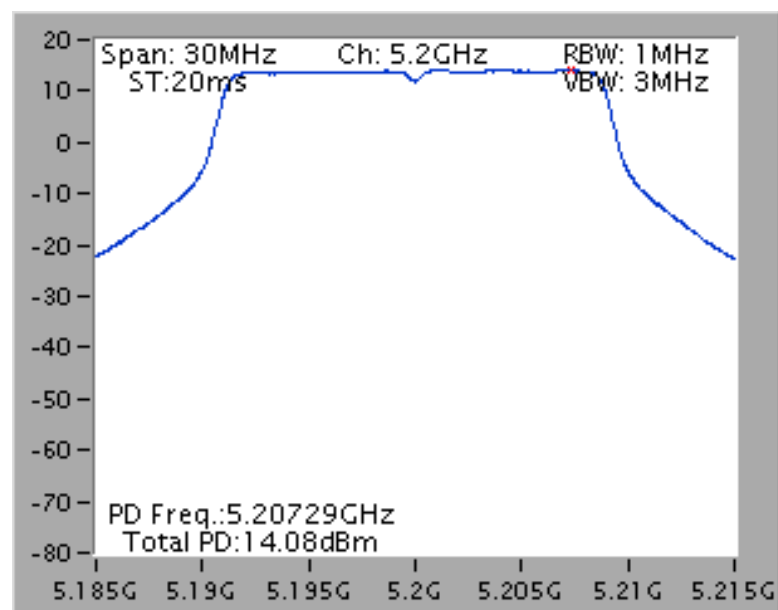

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4/ 5230 MHz

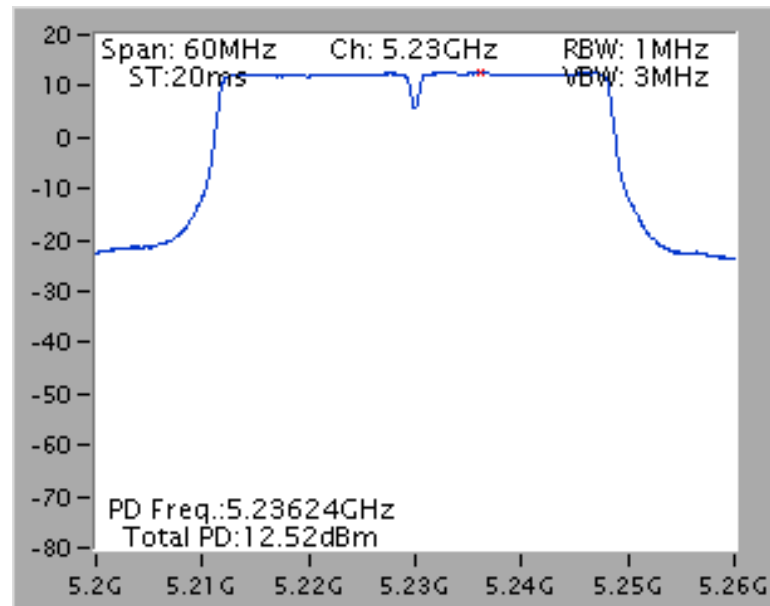


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4/ 5210 MHz

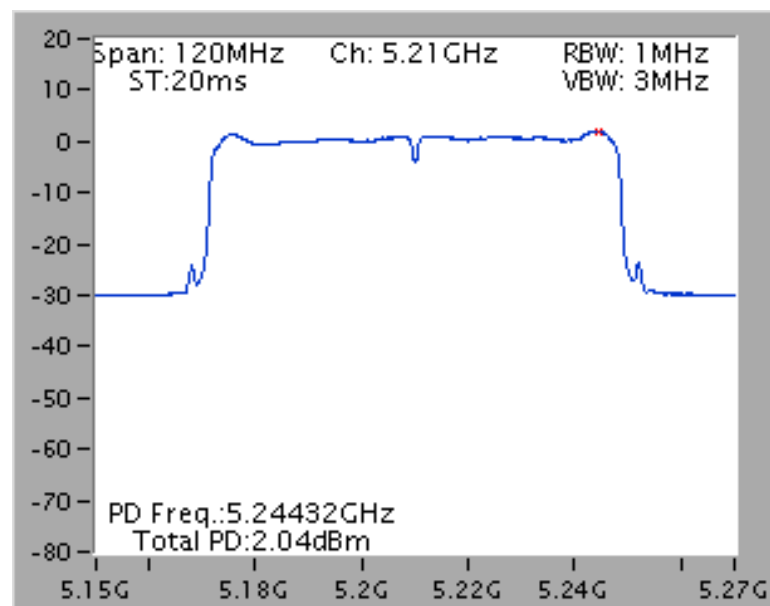


For Beamforming Mode


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

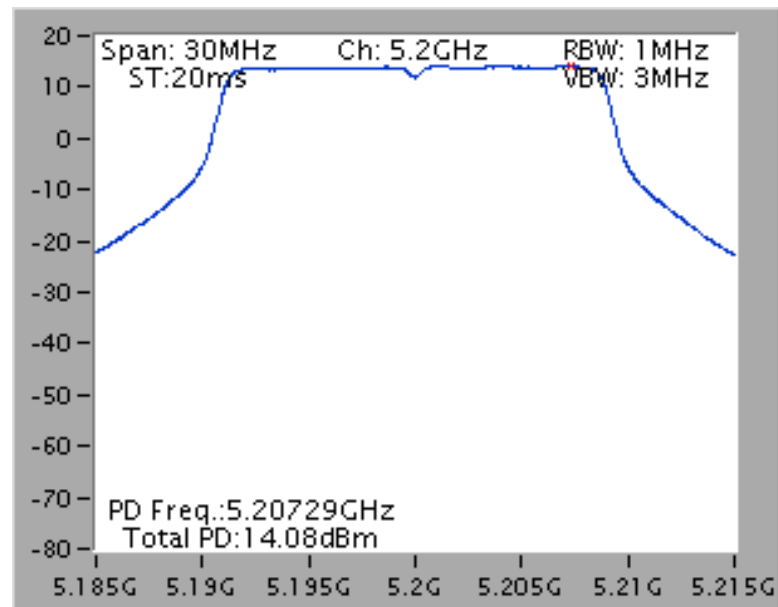

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4/ 5230 MHz

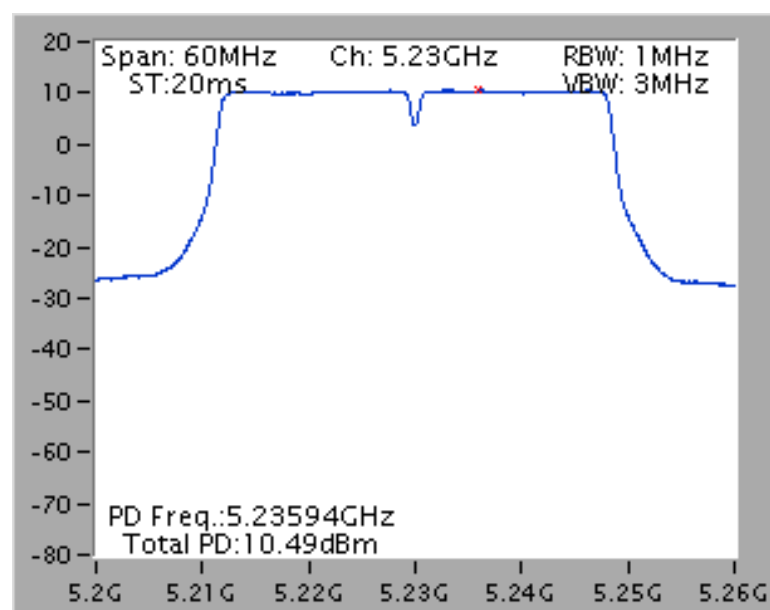

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4/ 5210 MHz

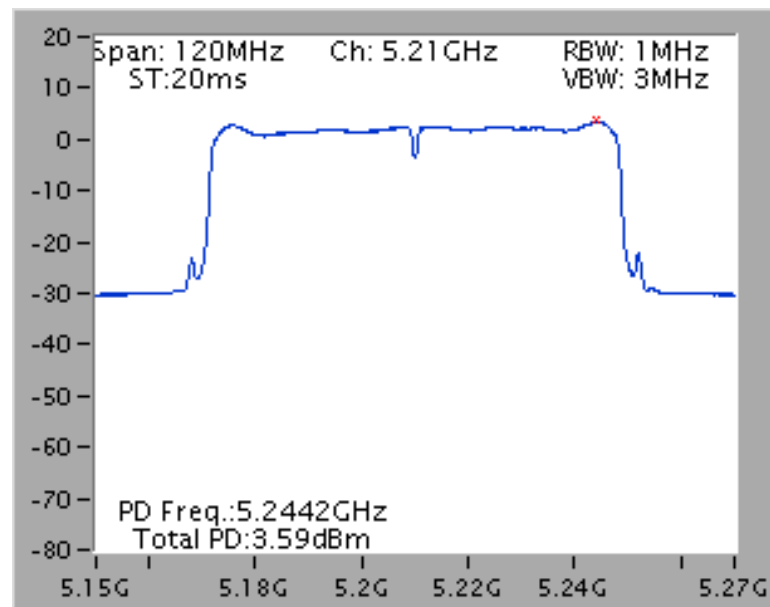

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

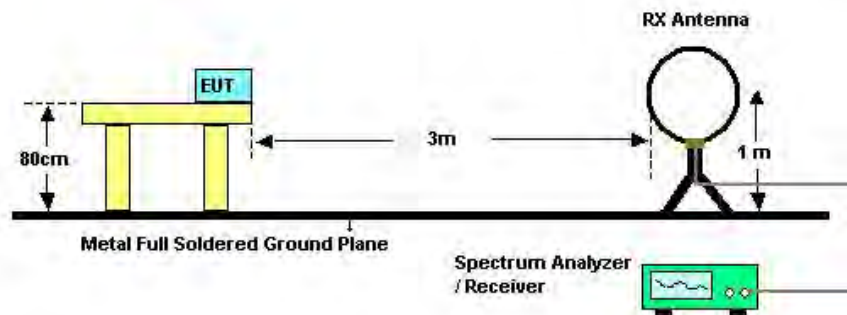

For Radiated Emissions: 30MHz~1GHz

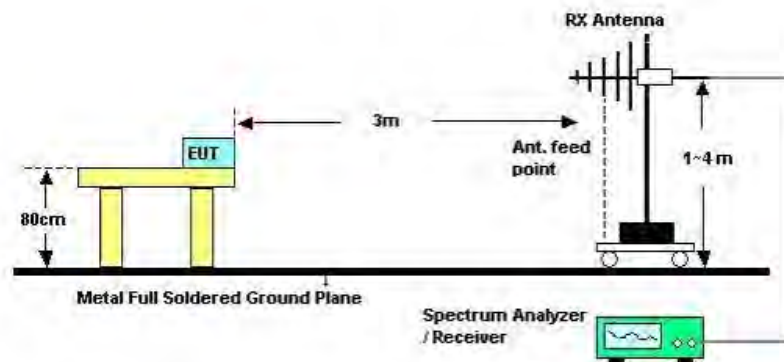

For Radiated Emissions: Above 1GHz

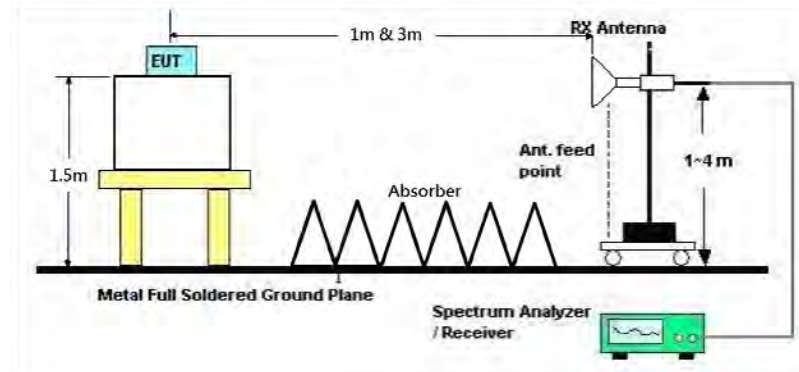

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	Normal Link
Test Date	Jan. 28, 2015	Test Mode	Mode 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	Normal Link / Mode 2

Horizontal

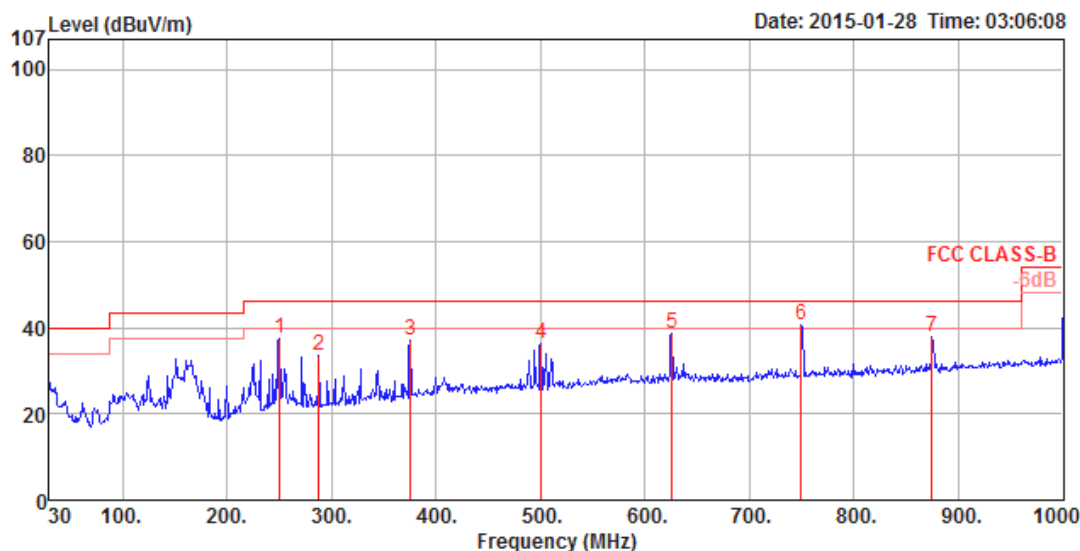

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	250.19	37.36	46.00	-8.64	55.54	1.13	32.33	13.02	HORIZONTAL	155	125	Peak
2	288.02	33.49	46.00	-12.51	50.92	1.21	32.30	13.66	HORIZONTAL	55	125	Peak
3	375.32	36.96	46.00	-9.04	51.97	1.38	32.32	15.93	HORIZONTAL	86	100	Peak
4	500.45	36.26	46.00	-9.74	49.26	1.60	32.41	17.81	HORIZONTAL	140	100	Peak
5	625.58	38.86	46.00	-7.14	50.32	1.81	32.53	19.26	HORIZONTAL	239	200	Peak
6	749.74	40.50	46.00	-5.50	50.75	1.97	32.42	20.20	HORIZONTAL	132	125	Peak
7	874.87	38.07	46.00	-7.93	46.64	2.13	32.05	21.35	HORIZONTAL	149	100	Peak

Vertical

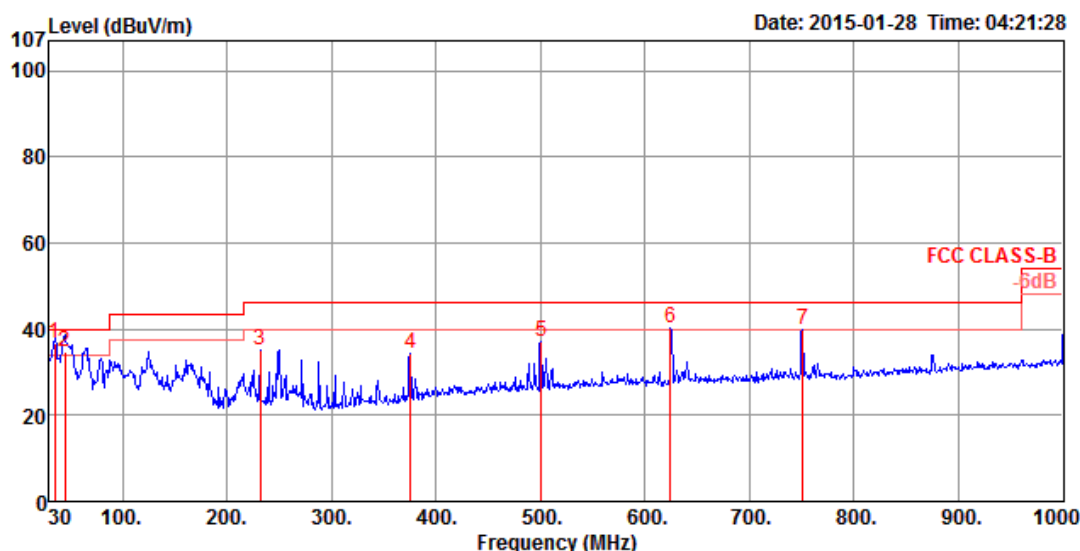

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	34.85	36.77	40.00	-3.23	51.76	0.42	32.41	17.00	VERTICAL	223	100	QP
2	44.55	34.70	40.00	-5.30	55.45	0.48	32.43	11.20	VERTICAL	147	100	QP
3	231.76	35.30	46.00	-10.70	54.92	1.09	32.19	11.48	VERTICAL	299	100	Peak
4	375.32	34.34	46.00	-11.66	49.37	1.38	32.32	15.91	VERTICAL	142	125	Peak
5	500.45	37.30	46.00	-8.70	50.31	1.60	32.41	17.80	VERTICAL	193	125	Peak
6	624.61	40.10	46.00	-5.90	51.58	1.81	32.54	19.25	VERTICAL	230	100	Peak
7	750.71	39.73	46.00	-6.27	49.97	1.97	32.42	20.21	VERTICAL	257	100	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~40GHz)

For Non-Beamforming Mode

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 01, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15538.26	47.67	54.00	-6.33	33.32	10.72	34.72	38.35	HORIZONTAL	296	115	Average
2	15540.41	60.03	74.00	-13.97	45.69	10.72	34.72	38.34	HORIZONTAL	296	115	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15536.93	64.34	74.00	-9.66	50.00	10.72	34.72	38.34	VERTICAL	142	206	Peak
2	15539.59	50.68	54.00	-3.32	36.34	10.72	34.72	38.34	VERTICAL	142	206	Average

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 01, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15595.66	60.69	74.00	-13.31	46.42	10.76	34.75	38.26	HORIZONTAL	297	111	Peak
2	15599.77	47.73	54.00	-6.27	33.46	10.76	34.75	38.26	HORIZONTAL	297	111	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15599.48	64.91	74.00	-9.09	50.63	10.76	34.75	38.27	VERTICAL	141	204	Peak
2	15599.54	50.90	54.00	-3.10	36.62	10.76	34.75	38.27	VERTICAL	141	204	Average

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 01, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15721.10	62.63	74.00	-11.37	48.54	10.80	34.80	38.09	HORIZONTAL	137	207	Peak
2	15722.89	48.90	54.00	-5.10	34.81	10.80	34.80	38.09	HORIZONTAL	137	207	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15718.99	64.29	74.00	-9.71	50.21	10.80	34.80	38.08	VERTICAL	140	200	Peak
2	15719.64	50.74	54.00	-3.26	36.66	10.80	34.80	38.08	VERTICAL	140	200	Average

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Feb. 02, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15531.01	57.36	74.00	-16.64	43.00	10.72	34.72	38.36	HORIZONTAL	292	123	Peak
2	15537.83	43.76	54.00	-10.24	29.41	10.72	34.72	38.35	HORIZONTAL	292	123	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15539.00	62.50	74.00	-11.50	48.16	10.72	34.72	38.34	VERTICAL	137	206	Peak
2	15540.91	47.36	54.00	-6.64	33.03	10.72	34.73	38.34	VERTICAL	137	206	Average

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Feb. 02, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15596.31	44.32	54.00	-9.68	30.05	10.76	34.75	38.26	HORIZONTAL	97	199	Average
2	15602.43	58.39	74.00	-15.61	44.13	10.76	34.75	38.25	HORIZONTAL	97	199	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15601.43	64.44	74.00	-9.56	50.22	10.76	34.75	38.21	VERTICAL	128	203	Peak
2	15603.43	49.38	54.00	-4.62	35.16	10.76	34.75	38.21	VERTICAL	128	203	Average

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 02, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15721.61	58.87	74.00	-15.13	44.78	10.80	34.80	38.09	HORIZONTAL	212	207	Peak
2	15723.34	44.46	54.00	-9.54	30.38	10.80	34.80	38.08	HORIZONTAL	212	207	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15708.63	63.48	74.00	-10.52	49.39	10.80	34.79	38.08	VERTICAL	137	203	Peak
2	15720.91	49.30	54.00	-4.70	35.22	10.80	34.80	38.08	VERTICAL	137	203	Average

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 02, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15548.29	43.83	54.00	-10.17	29.51	10.72	34.73	38.33	HORIZONTAL	338	162	Average
2	15553.94	56.84	74.00	-17.16	42.53	10.72	34.73	38.32	HORIZONTAL	338	162	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15545.11	57.39	74.00	-16.61	43.06	10.72	34.73	38.34	VERTICAL	146	205	Peak
2	15561.97	44.29	54.00	-9.71	30.03	10.72	34.73	38.27	VERTICAL	146	205	Average

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 02, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15679.17	56.28	74.00	-17.72	42.15	10.76	34.78	38.15	HORIZONTAL	142	100	Peak
2	15698.97	44.15	54.00	-9.85	30.02	10.80	34.79	38.12	HORIZONTAL	142	100	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15683.05	62.33	74.00	-11.67	48.20	10.76	34.78	38.15	VERTICAL	134	203	Peak
2	15692.43	49.71	54.00	-4.29	35.62	10.80	34.79	38.08	VERTICAL	134	203	Average

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 03, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10417.45	44.84	54.00	-9.16	30.30	8.66	33.87	39.75	HORIZONTAL	206	102	Average
2	10421.51	57.60	74.00	-16.40	43.06	8.66	33.88	39.76	HORIZONTAL	206	102	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10418.73	44.77	54.00	-9.23	30.25	8.66	33.88	39.74	VERTICAL	115	102	Average
2	10420.12	57.29	74.00	-16.71	42.77	8.66	33.88	39.74	VERTICAL	115	102	Peak

For Beamforming Mode

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 04, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15538.22	57.33	74.00	-16.67	42.98	10.72	34.72	38.35	HORIZONTAL	164	100	Peak
2	15539.52	45.41	54.00	-8.59	31.07	10.72	34.72	38.34	HORIZONTAL	164	100	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15539.66	48.42	54.00	-5.58	34.08	10.72	34.72	38.34	VERTICAL	139	202	Average
2	15543.99	61.53	74.00	-12.47	47.20	10.72	34.73	38.34	VERTICAL	139	202	Peak

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Feb. 04, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15585.91	57.08	74.00	-16.92	42.82	10.72	34.74	38.28	HORIZONTAL	42	144	Peak
2	15599.33	45.79	54.00	-8.21	31.52	10.76	34.75	38.26	HORIZONTAL	42	144	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15596.44	65.38	74.00	-8.62	51.10	10.76	34.75	38.27	VERTICAL	130	194	Peak
2	15604.13	50.85	54.00	-3.15	36.63	10.76	34.75	38.21	VERTICAL	130	194	Average

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 04, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15719.23	45.79	54.00	-8.21	31.70	10.80	34.80	38.09	HORIZONTAL	52	100	Average
2	15726.88	58.82	74.00	-15.18	44.74	10.80	34.80	38.08	HORIZONTAL	52	100	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15718.22	64.99	74.00	-9.01	50.91	10.80	34.80	38.08	VERTICAL	136	188	Peak
2	15720.29	50.95	54.00	-3.05	36.87	10.80	34.80	38.08	VERTICAL	136	188	Average

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 04, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15563.08	57.04	74.00	-16.96	42.74	10.72	34.73	38.31	HORIZONTAL	95	124	Peak
2	15566.54	44.75	54.00	-9.25	30.46	10.72	34.74	38.31	HORIZONTAL	95	124	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15577.02	46.04	54.00	-7.96	31.79	10.72	34.74	38.27	VERTICAL	139	124	Average
2	15579.46	59.45	74.00	-14.55	45.20	10.72	34.74	38.27	VERTICAL	139	123	Peak

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 04, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15683.53	57.68	74.00	-16.32	43.56	10.76	34.78	38.14	HORIZONTAL	76	114	Peak
2	15699.20	44.41	54.00	-9.59	30.28	10.80	34.79	38.12	HORIZONTAL	76	114	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15685.87	59.98	74.00	-14.02	45.85	10.76	34.78	38.15	VERTICAL	129	101	Peak
2	15690.22	46.51	54.00	-7.49	32.35	10.80	34.79	38.15	VERTICAL	129	101	Average

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 04, 2015		

Horizontal

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	15628.94	57.55	74.00	-16.45	43.33	38.22	10.76	34.76	122	93 HORIZONTAL	Peak
2	15631.27	44.70	54.00	-9.30	30.49	38.21	10.76	34.76	122	93 HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	15627.42	59.08	74.00	-14.92	44.87	38.21	10.76	34.76	134	47 VERTICAL	Peak
2	15631.76	44.81	54.00	-9.19	30.60	38.21	10.76	34.76	134	47 VERTICAL	Average

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.6.3. Test Procedures

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

For Non-Beamforming Mode

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11a CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Jan. 30, 2015, Feb. 02, 2015		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	Remark
1	5146.82	72.67	74.00	-1.33	68.81	5.92	33.58	31.52	HORIZONTAL	275	110	Peak
2	5150.00	50.19	54.00	-3.81	46.33	5.92	33.58	31.52	HORIZONTAL	275	110	Average
3	5173.34	103.58			99.66	5.95	33.57	31.54	HORIZONTAL	275	110	Average
4	5173.92	113.27			109.35	5.95	33.57	31.54	HORIZONTAL	275	110	Peak

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	Remark
1	5145.95	59.39	74.00	-14.61	55.53	5.92	33.58	31.52	VERTICAL	325	100	Peak
2	5150.00	47.11	54.00	-6.89	43.25	5.92	33.58	31.52	VERTICAL	325	100	Average
3	5198.26	108.29			104.32	5.97	33.56	31.56	VERTICAL	325	100	Average
4	5198.55	117.07			113.10	5.97	33.56	31.56	VERTICAL	325	100	Peak

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	Remark
1	5119.61	46.85	54.00	-7.15	43.04	5.90	33.59	31.50	VERTICAL	8	133	Average
2	5146.53	59.86	74.00	-14.14	56.00	5.92	33.58	31.52	VERTICAL	8	133	Peak
3	5242.17	107.45			103.42	5.99	33.55	31.59	VERTICAL	8	133	Average
4	5242.60	117.65			113.62	5.99	33.55	31.59	VERTICAL	8	133	Peak
5	5354.34	59.87	74.00	-14.13	55.62	6.06	33.50	31.69	VERTICAL	8	133	Peak
6	5359.99	47.34	54.00	-6.66	43.07	6.08	33.50	31.69	VERTICAL	8	133	Average

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Jan. 31, 2015		

Channel 36

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	5147.68	66.78	74.00	-7.22	62.92	31.52	5.92	33.58	100	319	VERTICAL	Peak
2	5150.00	52.73	54.00	-1.27	48.87	31.52	5.92	33.58	100	319	VERTICAL	Average
3	5176.24	117.16			113.23	31.55	5.95	33.57	100	319	VERTICAL	Peak
4	5177.40	107.84			103.91	31.55	5.95	33.57	100	319	VERTICAL	Average

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	5139.00	60.77	74.00	-13.23	56.93	31.51	5.92	33.59	100	328	VERTICAL	Peak
2	5150.00	47.83	54.00	-6.17	43.97	31.52	5.92	33.58	100	328	VERTICAL	Average
3	5198.26	108.15			104.18	31.56	5.97	33.56	100	328	VERTICAL	Average
4	5199.42	117.35			113.38	31.56	5.97	33.56	100	328	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	5134.37	58.48	74.00	-15.52	54.64	31.51	5.92	33.59	120	44	VERTICAL	Peak
2	5150.00	45.79	54.00	-8.21	41.93	31.52	5.92	33.58	120	44	VERTICAL	Average
3	5247.81	116.83			112.77	31.61	5.99	33.54	120	44	VERTICAL	Peak
4	5248.25	108.21			104.15	31.61	5.99	33.54	120	44	VERTICAL	Average
5	5350.00	46.36	54.00	-7.64	42.13	31.68	6.06	33.51	120	44	VERTICAL	Average
6	5351.74	60.04	74.00	-13.96	55.81	31.68	6.06	33.51	120	44	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Jan. 31, 2015		

Channel 38

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	5150.00	52.51	54.00	-1.49	48.65	5.92	33.58	31.52	VERTICAL	20	108	Average
2	5150.00	69.18	74.00	-4.82	65.32	5.92	33.58	31.52	VERTICAL	20	108	Peak
3	5180.45	101.05			97.12	5.95	33.57	31.55	VERTICAL	20	108	Average
4	5201.29	109.69			105.72	5.97	33.56	31.56	VERTICAL	20	108	Peak

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	5140.45	47.57	54.00	-6.43	43.73	5.92	33.59	31.51	VERTICAL	21	105	Average
2	5141.03	61.38	74.00	-12.62	57.54	5.92	33.59	31.51	VERTICAL	21	105	Peak
3	5240.42	105.09			101.06	5.99	33.55	31.59	VERTICAL	21	105	Average
4	5241.29	114.18			110.15	5.99	33.55	31.59	VERTICAL	21	105	Peak

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Jan. 31, 2015		

Channel 42

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	5144.21	52.90	54.00	-1.10	49.04	5.92	33.58	31.52	VERTICAL	323	102	Average
2	5147.83	65.67	74.00	-8.33	61.81	5.92	33.58	31.52	VERTICAL	323	102	Peak
3	5228.09	104.21			100.19	5.99	33.55	31.58	VERTICAL	323	102	Peak
4	5245.46	95.93			91.90	5.99	33.55	31.59	VERTICAL	323	102	Average
5	5352.17	45.54	54.00	-8.46	41.31	6.06	33.51	31.68	VERTICAL	323	102	Average
6	5363.75	58.52	74.00	-15.48	54.25	6.08	33.50	31.69	VERTICAL	323	102	Peak

Item 3, 4 are the fundamental frequency at 5210 MHz.

For Beamforming Mode

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 01, 2015		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5147.68	65.14	74.00	-8.86	61.28	5.92	33.58	31.52	VERTICAL	316	100	Peak
2	5150.00	52.36	54.00	-1.64	48.50	5.92	33.58	31.52	VERTICAL	316	100	Average
3	5185.21	119.70			115.77	5.95	33.57	31.55	VERTICAL	316	100	Peak
4	5187.81	108.68			104.72	5.97	33.57	31.56	VERTICAL	316	100	Average

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5149.13	60.92	74.00	-13.08	57.06	5.92	33.58	31.52	VERTICAL	319	100	Peak
2	5150.00	48.66	54.00	-5.34	44.80	5.92	33.58	31.52	VERTICAL	319	100	Average
3	5205.21	121.83			117.85	5.97	33.56	31.57	VERTICAL	319	100	Peak
4	5207.53	110.33			106.35	5.97	33.56	31.57	VERTICAL	319	100	Average

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5148.70	59.80	74.00	-14.20	55.94	5.92	33.58	31.52	VERTICAL	317	100	Peak
2	5150.00	46.77	54.00	-7.23	42.91	5.92	33.58	31.52	VERTICAL	317	100	Average
3	5243.04	109.89			105.86	5.99	33.55	31.59	VERTICAL	317	100	Average
4	5244.78	120.68			116.65	5.99	33.55	31.59	VERTICAL	317	100	Peak
5	5350.00	46.93	54.00	-7.07	42.70	6.06	33.51	31.68	VERTICAL	317	100	Average
6	5352.60	59.50	74.00	-14.50	55.27	6.06	33.51	31.68	VERTICAL	317	100	Peak

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 03, 2015		

Channel 38

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	5145.95	64.93	74.00	-9.07	61.07	5.92	33.58	31.52	VERTICAL	320	133	Peak
2	5150.00	52.60	54.00	-1.40	48.74	5.92	33.58	31.52	VERTICAL	320	133	Average
3	5197.81	102.28			98.31	5.97	33.56	31.56	VERTICAL	320	133	Average
4	5199.55	112.47			108.50	5.97	33.56	31.56	VERTICAL	320	133	Peak

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	5143.34	62.48	74.00	-11.52	58.62	5.92	33.58	31.52	VERTICAL	324	112	Peak
2	5150.00	50.43	54.00	-3.57	46.57	5.92	33.58	31.52	VERTICAL	324	112	Average
3	5218.71	118.07			114.08	5.97	33.56	31.58	VERTICAL	324	112	Peak
4	5219.29	108.72			104.73	5.97	33.56	31.58	VERTICAL	324	112	Average

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Feb. 04, 2015		

Channel 42

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	5118.89	64.56	74.00	-9.44	60.75	5.90	33.59	31.50	VERTICAL	313	101	Peak
2	5144.21	52.14	54.00	-1.86	48.28	5.92	33.58	31.52	VERTICAL	313	101	Average
3	5244.01	100.11			96.08	5.99	33.55	31.59	VERTICAL	313	101	Average
4	5244.73	110.96			106.93	5.99	33.55	31.59	VERTICAL	313	101	Peak
5	5350.00	48.34	54.00	-5.66	44.11	6.06	33.51	31.68	VERTICAL	313	101	Average
6	5352.89	61.29	74.00	-12.71	57.06	6.06	33.51	31.68	VERTICAL	313	101	Peak

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.7.4. Test Setup Layout

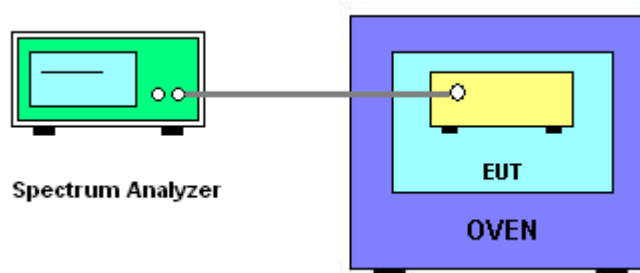

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang	Test Date	Feb. 25, 2015

Mode: 20 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5199.9730
110.00	5199.9700
93.50	5199.9772
Max. Deviation (MHz)	0.0300
Max. Deviation (ppm)	5.77

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
-30	5200.0234
-20	5200.0234
-10	5200.0216
0	5200.0144
10	5200.0102
20	5199.9922
30	5199.9862
40	5199.9754
50	5199.9706
Max. Deviation (MHz)	0.0294
Max. Deviation (ppm)	5.65

Mode: 40 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5190 MHz
126.50	5189.9748
110.00	5189.9730
93.50	5189.9724
Max. Deviation (MHz)	0.0276
Max. Deviation (ppm)	5.32

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5190 MHz
-30	5190.0252
-20	5190.0192
-10	5190.0144
0	5190.0096
10	5190.0084
20	5189.9892
30	5189.9886
40	5189.9694
50	5189.9688
Max. Deviation (MHz)	0.0312
Max. Deviation (ppm)	6.01

Mode: 80 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5210 MHz
126.50	5209.9742
110.00	5209.9724
93.50	5209.9718
Max. Deviation (MHz)	0.0282
Max. Deviation (ppm)	5.41

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5210 MHz
-30	5210.0216
-20	5209.9560
-10	5210.0044
0	5210.0023
10	5209.9898
20	5209.9934
30	5209.9802
40	5209.9688
50	5209.9730
Max. Deviation (MHz)	0.0440
Max. Deviation (ppm)	8.45

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz - 30 MHz	Jul. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Jan. 21, 2015	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESR26	101289	9kHz~26GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec.12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	TH01-DV-02	1GHz ~ 6GHz	Jan. 10, 2015	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	TH01-DV-01	1GHz ~ 6GHz	Jan. 10, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410002	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY54320014	50MHz~18GHz	Sep. 12, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY54320015	50MHz~18GHz	Aug. 15, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%