



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	<b>Arcadyan Technology Corporation</b>
Applicant Address	4F, No.9, Park Avenue II, Science-based Industrial Park Hsinchu 300, Taiwan
FCC ID	<b>RAXWA9102BAC33</b>
Manufacturer's company	<b>Arcadyan Technology Corporation</b>
Manufacturer Address	4F, No.9, Park Avenue II, Science-based Industrial Park Hsinchu 300, Taiwan

Product Name	Enterprise WiFi Access Point
Brand Name	Arcadyan
Model No.	WA9102BAC33
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Oct. 09, 2014
Final Test Date	Nov. 12, 2014
Submission Type	Original Equipment

### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes.....	7
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units .....	9
3.8. Table for Parameters of Test Software Setting .....	10
3.9. EUT Operation during Test .....	10
3.10. Duty Cycle.....	10
3.11. Test Configurations .....	11
<b>4. TEST RESULT .....</b>	<b>14</b>
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	18
4.3. Maximum Conducted Output Power Measurement.....	26
4.4. Power Spectral Density Measurement .....	30
4.5. Radiated Emissions Measurement .....	36
4.6. Band Edge Emissions Measurement .....	51
4.7. Frequency Stability Measurement .....	56
4.8. Antenna Requirements .....	58
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>59</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>61</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT .....</b>	<b>A1 ~ A23</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B5</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>C1 ~ C3</b>
<b>APPENDIX D. RADIATED EMISSION CO-LOCATION REPORT .....</b>	<b>D1 ~ D3</b>



## History of This Test Report



Report No.: FR400970AB

Certificate No.: CB10311201

## 1. CERTIFICATE OF COMPLIANCE

Product Name : Enterprise WiFi Access Point  
Brand Name : Arcadyan  
Model No. : WA9102BAC33  
Applicant : Arcadyan Technology Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 09, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	18.41 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.75 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.23 dB
4.5	15.407(b)	Radiated Emissions	Complies	3.25 dB
4.6	15.407(b)	Band Edge Emissions	Complies	1.05 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter or PoE
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	802.11ac MCS0/Nss1 (VHT20): 17.76 MHz ; 802.11ac MCS0/Nss1 (VHT40): 34.56 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.16 MHz
Maximum Conducted Output Power	802.11ac MCS0/Nss1 (VHT20): 28.10 dBm ; 802.11ac MCS0/Nss1 (VHT40): 29.25 dBm ; 802.11ac MCS0/Nss1 (VHT80): 15.35 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**IEEE 802.11a**

Items	Description	
Product Type	WLAN (3TX, 3RX)	
Radio Type	Intentional Transceiver	
Power Type	From power adapter or PoE	
Modulation	OFDM for IEEE 802.11a	
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)	
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)	
Frequency Range	5150 ~ 5250MHz	
Channel Number	4	
Channel Band Width (99%)	17.28 MHz	
Maximum Conducted Output Power	28.28 dBm	
Carrier Frequencies	Please refer to section 3.4	
Antenna	Please refer to section 3.3	

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming
Operating Mode	<input type="checkbox"/> Outdoor access point <input checked="" type="checkbox"/> Indoor access point <input type="checkbox"/> Fixed point-to-point access points <input type="checkbox"/> Mobile and portable client devices	

**Antenna and Band width**

Antenna	Three (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

**IEEE 11n/ac Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
 Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:  
 HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

### 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	LITE	520603-0020-22R	PIFA Antenna	I-PEX	-	1.20
2	LITE	520603-0020-22R	PIFA Antenna	I-PEX	2.85	-
3	LITE	520603-0020-22R	PIFA Antenna	I-PEX	-	4.37
4	LITE	520603-0020-22R	PIFA Antenna	I-PEX	0.69	-
5	LITE	520603-0020-22R	PIFA Antenna	I-PEX	-	3.23
6	LITE	520603-0020-22R	PIFA Antenna	I-PEX	-0.11	-

Note1: The EUT has six antennas.

Note2: The antenna gain includes cable loss.

**For 2.4GHz function:**

**For IEEE 802.11b/g/n mode (3TX/3RX)**

Chain 2, Chain 4 and Chain 6 will transmit/receive the same signal simultaneously.


Chain 2, Chain 4 and Chain 6 can be used as transmitting/receiving antennas.

**For 5GHz function:**

**For IEEE 802.11a/n/ac mode (3TX/3RX)**

Chain 1, Chain 3 and Chain 5 will transmit/receive the same signal simultaneously.

Chain 1, Chain 3 and Chain 5 can be used as transmitting/receiving antennas.

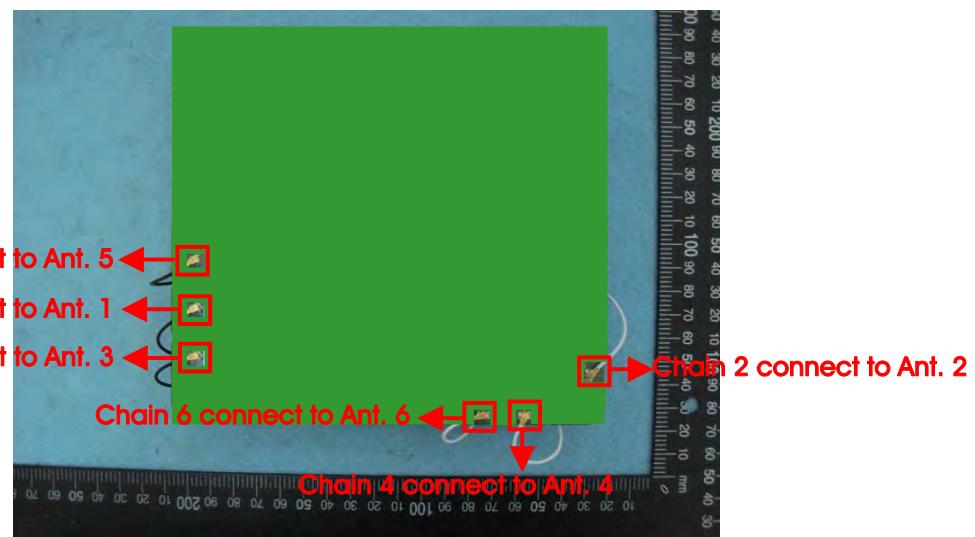

### 3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+3+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+3+5
	11ac VHT80	Band 1	MCS0/Nss1	42	1+3+5
	11a/BPSK	Band 1	6Mbps	36/40/48	1+3+5
Power Spectral Density	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+3+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+3+5
	11ac VHT80	Band 1	MCS0/Nss1	42	1+3+5
	11a/BPSK	Band 1	6Mbps	36/40/48	1+3+5
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+3+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+3+5
	11ac VHT80	Band 1	MCS0/Nss1	42	1+3+5
	11a/BPSK	Band 1	6Mbps	36/40/48	1+3+5
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+3+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+3+5
	11ac VHT80	Band 1	MCS0/Nss1	42	1+3+5
	11a/BPSK	Band 1	6Mbps	36/40/48	1+3+5

Band Edge Emission	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+3+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+3+5
	11ac VHT80	Band 1	MCS0/Nss1	42	1+3+5
	11a/BPSK	Band 1	6Mbps	36/40/48	1+3+5
Frequency Stability	Un-modulation		-	40	1+3+5

Note1: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note2: The adapter and PoE are for measurement only, would not be marketed.

The adapter and PoE information as following:

Power	Brand	Model	Rating
Adapter	MOSO	MSP-C2000IC12.0-24W-US	Input: 100-240V ~ 50/60Hz 0.8A max Output: 12.0A, 2A
PoE	PowerDsine	PD-6561G300	Input: 100-240V ~ 50/60Hz 0.8A Output: 55V, 0.6A

Note4: The customer designated the test mode.

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. EUT with Adapter

**For Radiated Emission test (Below 1G):**

Mode 1. EUT standing with Adapter

Mode 2. EUT laying with Adapter

Mode 3. EUT standing with PoE

Mode 4. EUT laying with PoE

Mode 4 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test (Above1G):**

There are two modes of EUT, one is standing, and the other is laying position.

Standing has been evaluated to be the worst case after evaluating.

Consequently, the measurement will follow this it test configuration for radiated Emission test above1G

Mode 1. EUT standing

**For Co-location MPE and Radiated Emission Co-location Test:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix C) and Radiated Emission Co-location (please refer to Appendix D) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

Test Site Location					
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*3	DELL	E6430	DoC
Flash Disk	Silicon	I-Series	DoC
Adapter	MOSO	MSP-C2000IC12.0-24W-US	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	D420	E2KWM3945ABG
Adapter	MOSO	MSP-C2000IC12.0-24W-US	N/A

For Test Site No: 03CH01-CB (Below 1G)

Support Unit	Brand	Model	FCC ID
NB*3	DELL	E6430	DoC
PoE	PowerDsine	PD-6561G300	N/A
Flash Disk	Silicon	D33B01	DoC

For Test Site No: 03CH01-CB (Above 1G)

Support Unit	Brand	Model	FCC ID
NB	DELL	D420	DoC
Adapter	MOSO	MSP-C2000IC12.0-24W-US	N/A

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version				DOS		
Frequency	5180 MHz	5200 MHz	5240 MHz			
MCS0/Nss1 VHT20	20	21.5	21.5			

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version				DOS		
Frequency	5190 MHz	5230 MHz				
MCS0/Nss1 VHT40	16	23				

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version				DOS		
Frequency	5210 MHz					
MCS0/Nss1 VHT80	11					

#### Power Parameters of IEEE 802.11a

Test Software Version				DOS		
Frequency	5180 MHz	5200 MHz	5240 MHz			
802.11a	22	21	21.5			

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	1.899	1.955	97.14%	0.13	0.53
802.11ac MCS0/Nss1 VHT40	0.933	1.000	93.30%	0.30	1.07
802.11ac MCS0/Nss1 VHT80	0.459	0.515	89.13%	0.50	2.18
802.11a	2.022	2.086	96.93%	0.14	0.49

### 3.11. Test Configurations


#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

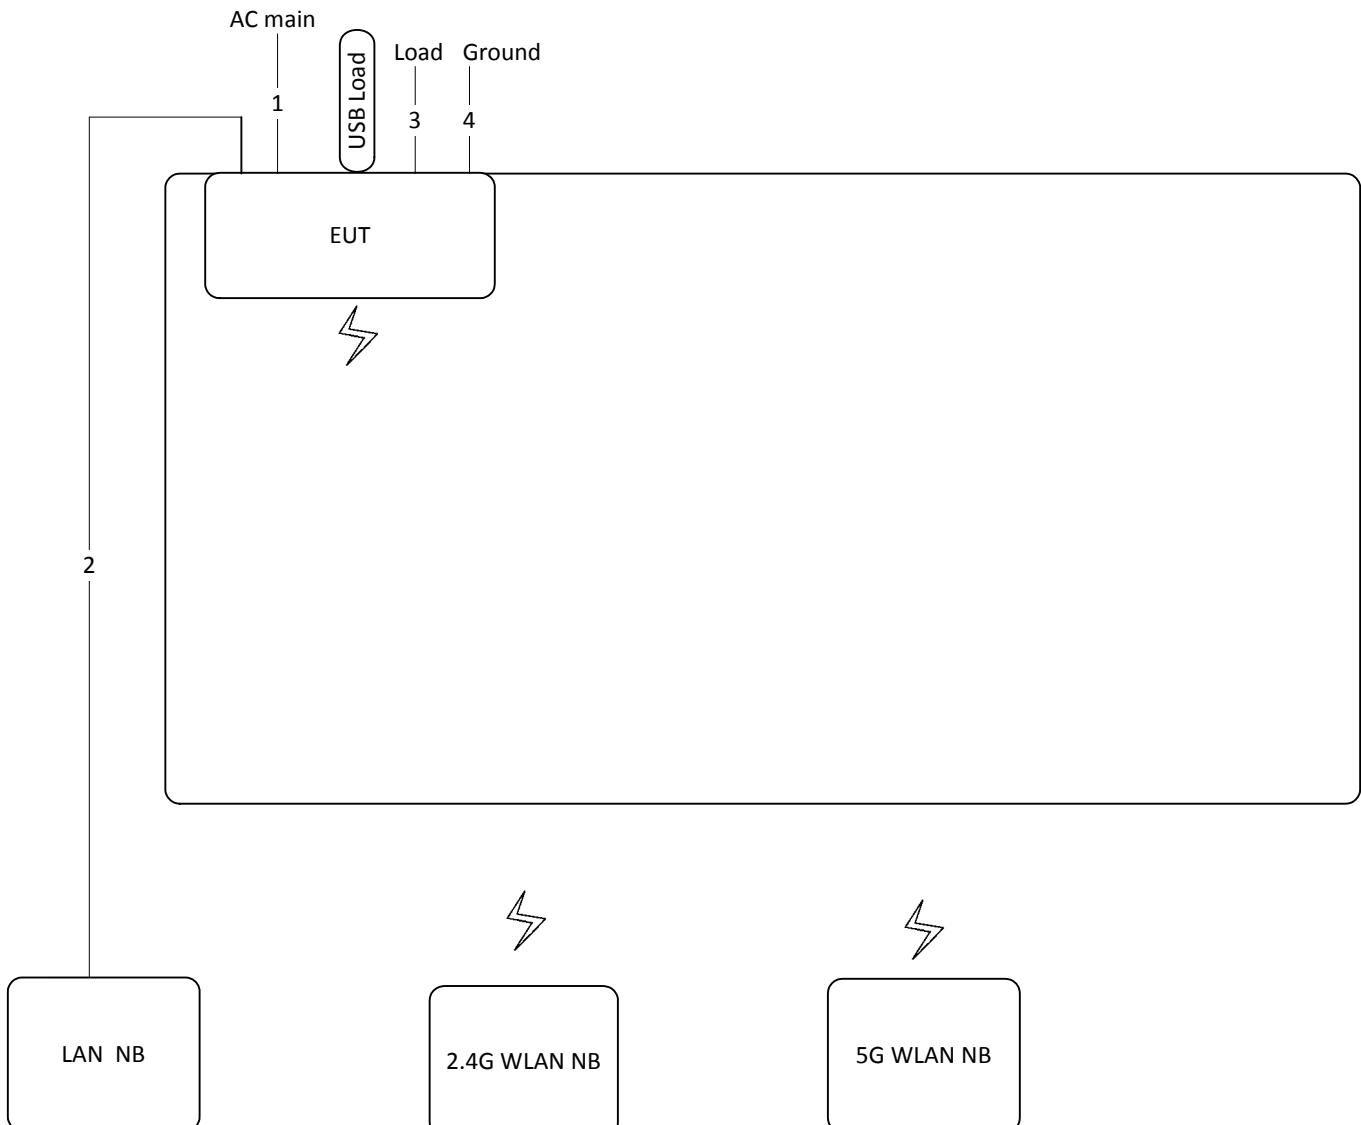

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	1.5m	Load
4	Ground cable	No	1.5m	-


### 3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

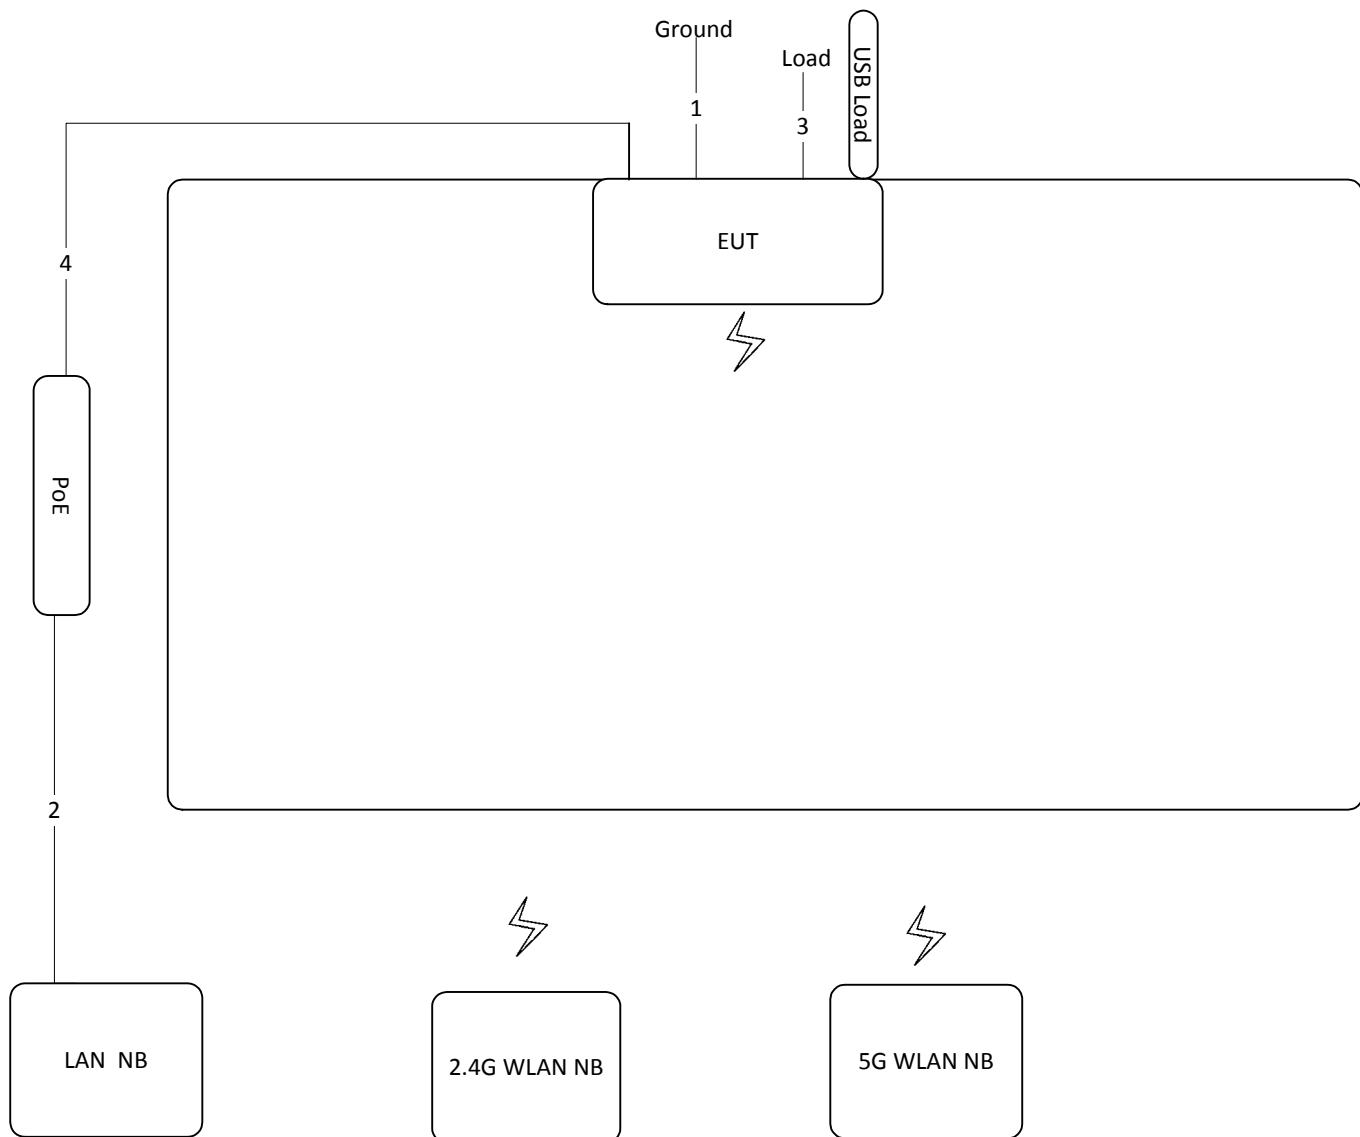

Item	Connection	Shielded	Length	Remark
1	Ground Cable	No	1.5m	-
2	RJ-45 cable	No	1.5m	-
3	RJ-45 cable	No	1.5m	Load
4	RJ-45 cable	Yes	10m	-

Test Configuration: above 1GHz

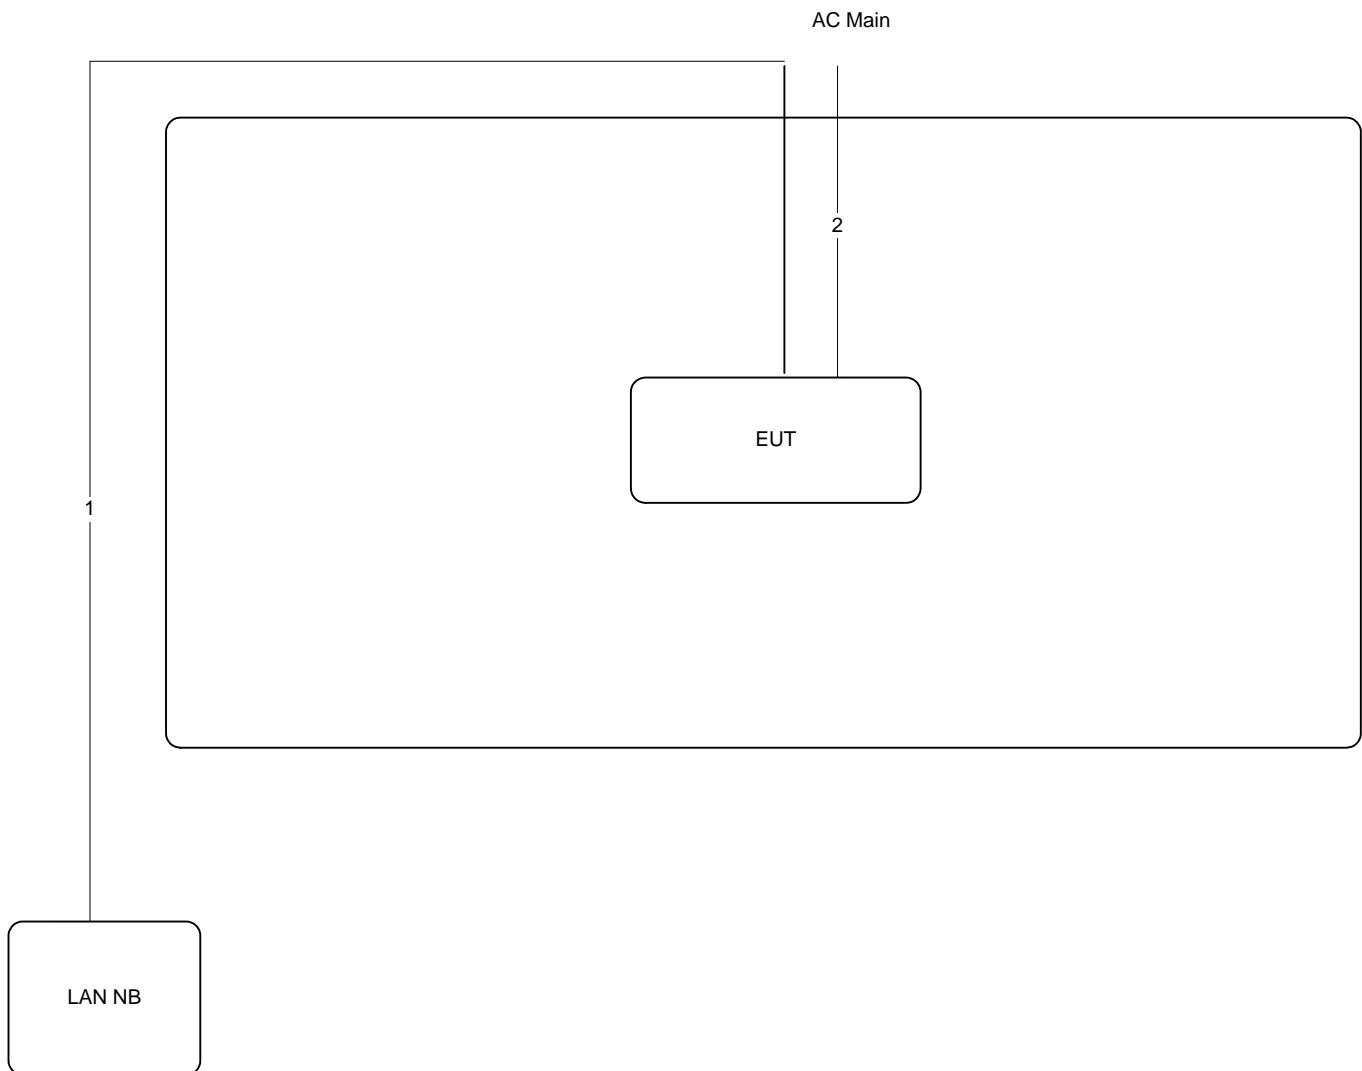

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

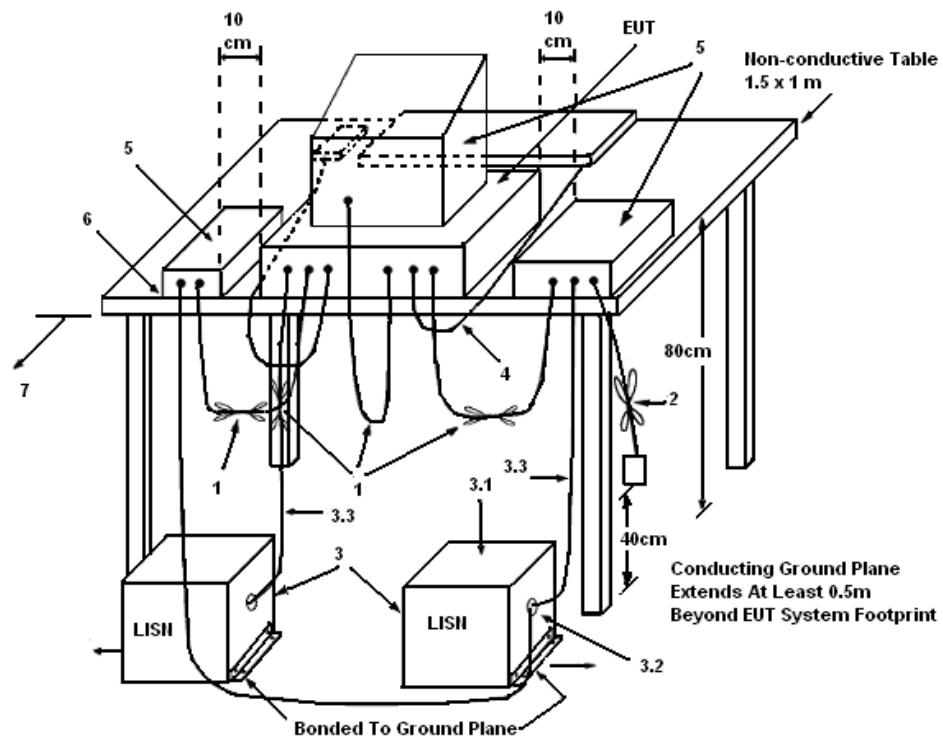

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	26°C	Humidity	55%
Test Engineer	Kane Liu	Phase	Line
Configuration	Normal Link		

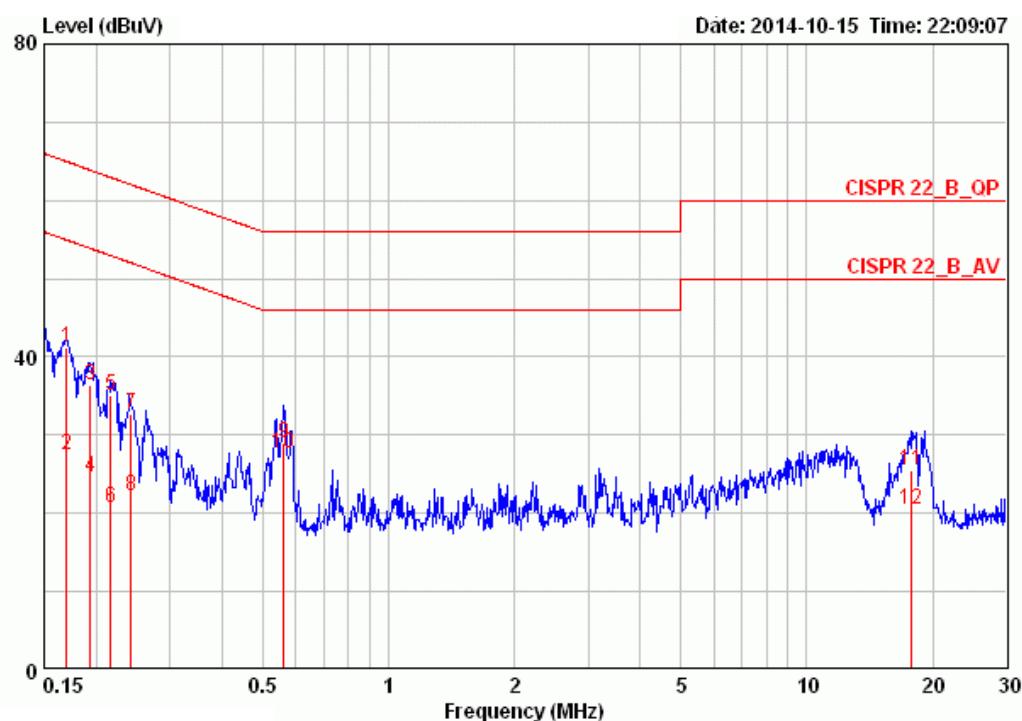

Freq	Level	Over Limit	LISN Line Factor	Read Level	Cable		Remark
					MHz	dBuV	
						dB	
1	0.16944	41.24	-23.75	64.99	9.96	31.12	0.16 LINE QP
2	0.16944	27.40	-27.59	54.99	9.96	17.28	0.16 LINE AVERAGE
3	0.19344	36.44	-27.44	63.89	9.96	26.32	0.16 LINE QP
4	0.19344	24.56	-29.32	53.89	9.96	14.44	0.16 LINE AVERAGE
5	0.21620	35.07	-27.90	62.96	9.96	24.94	0.17 LINE QP
6	0.21620	20.75	-32.22	52.96	9.96	10.62	0.17 LINE AVERAGE
7	0.24165	32.61	-29.43	62.04	9.96	22.48	0.17 LINE QP
8	0.24165	22.13	-29.91	52.04	9.96	12.00	0.17 LINE AVERAGE
9	0.56111	28.98	-27.02	56.00	9.97	18.82	0.19 LINE QP
10	0.56111	27.59	-18.41	46.00	9.97	17.43	0.19 LINE AVERAGE
11	17.755	25.41	-34.59	60.00	10.38	14.54	0.48 LINE QP
12	17.755	20.53	-29.47	50.00	10.38	9.66	0.48 LINE AVERAGE

Temperature	26°C	Humidity	55%
Test Engineer	Kane Liu	Phase	Neutral
Configuration	Normal Link		

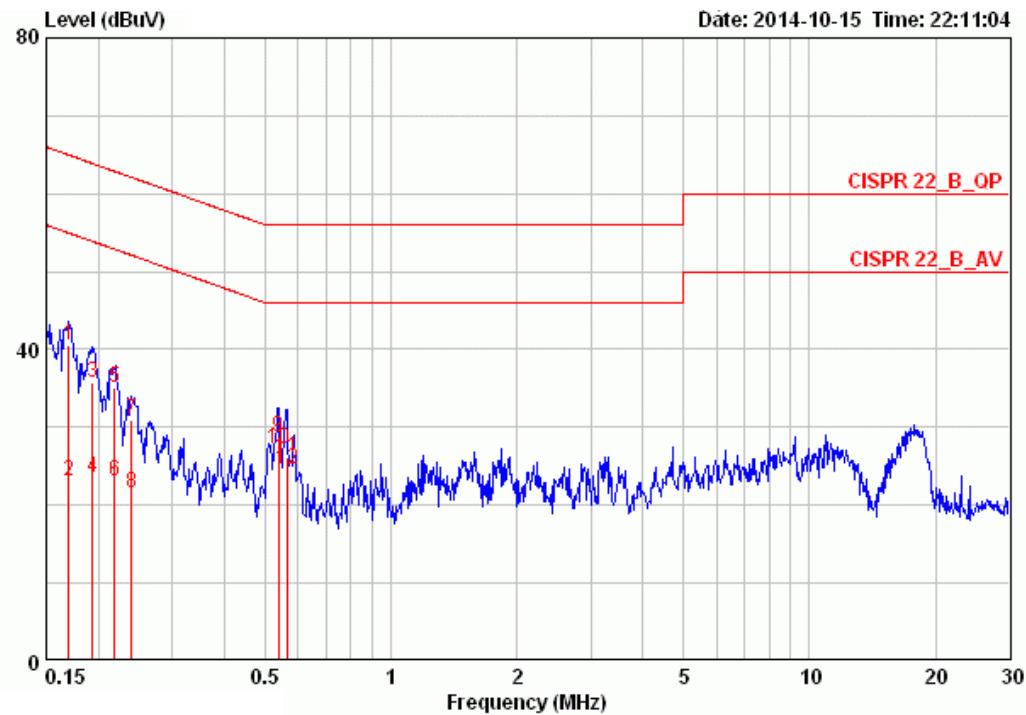

Freq	Level	Over Limit	Limit	LISN	Read Level	Cable		Remark	
						MHz	dBuV		
							dB		
1	0.16944	40.57	-24.42	64.99	9.95	30.46	0.16	NEUTRAL	QP
2	0.16944	23.17	-31.82	54.99	9.95	13.06	0.16	NEUTRAL	AVERAGE
3	0.19344	35.81	-28.07	63.89	9.95	25.70	0.16	NEUTRAL	QP
4	0.19344	23.48	-30.40	53.89	9.95	13.37	0.16	NEUTRAL	AVERAGE
5	0.21851	35.20	-27.68	62.88	9.95	25.08	0.17	NEUTRAL	QP
6	0.21851	23.05	-29.83	52.88	9.95	12.93	0.17	NEUTRAL	AVERAGE
7	0.24037	30.94	-31.15	62.08	9.95	20.82	0.17	NEUTRAL	QP
8	0.24037	21.68	-30.41	52.08	9.95	11.56	0.17	NEUTRAL	AVERAGE
9	0.53782	28.78	-27.22	56.00	9.96	18.64	0.19	NEUTRAL	QP
10	0.53782	27.27	-18.73	46.00	9.96	17.13	0.19	NEUTRAL	AVERAGE
11	0.56409	26.23	-29.77	56.00	9.96	16.08	0.19	NEUTRAL	QP
12	0.56409	24.65	-21.35	46.00	9.96	14.50	0.19	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	26°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 3 + Chain 5

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	22.88	17.76
40	5200 MHz	22.24	17.76
48	5240 MHz	23.52	17.76

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 3 + Chain 5

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.76	34.24
46	5230 MHz	37.44	34.56

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 3 + Chain 5


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	92.80	76.16

<b>Temperature</b>	26°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a / Chain 1 + Chain 3 + Chain 5**


<b>Channel</b>	<b>Frequency</b>	<b>26dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>
36	5180 MHz	22.56	17.28
40	5200 MHz	19.84	16.00
48	5240 MHz	19.68	16.00

### 26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 3 + Chain 5 / 5180 MHz

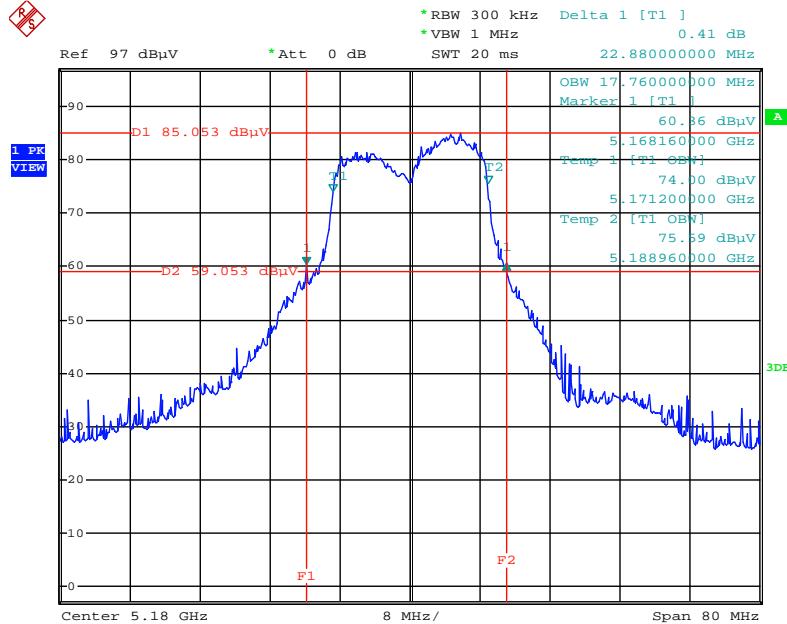


Date: 12.NOV.2014 16:35:50

### 26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 3 + Chain 5 / 5200 MHz

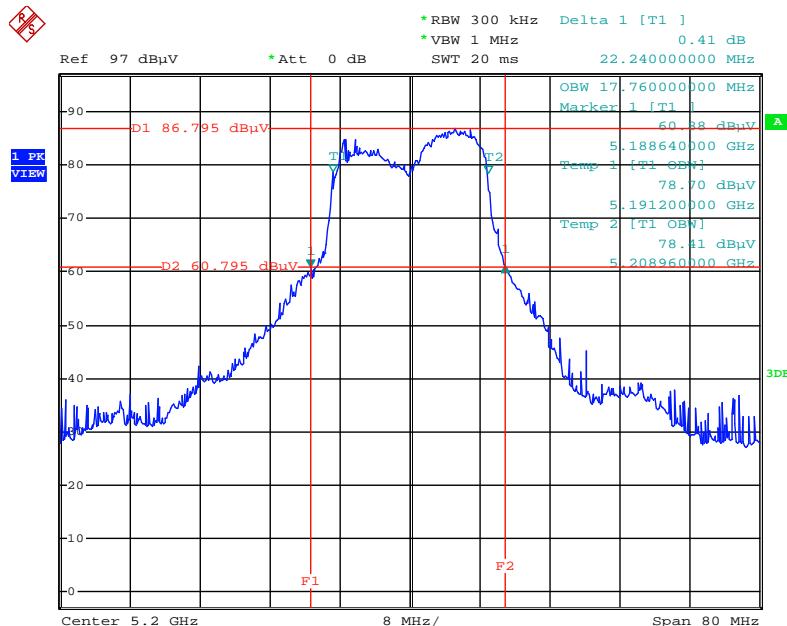


Date: 12.NOV.2014 16:34:34

### 26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 3 + Chain 5 / 5240 MHz

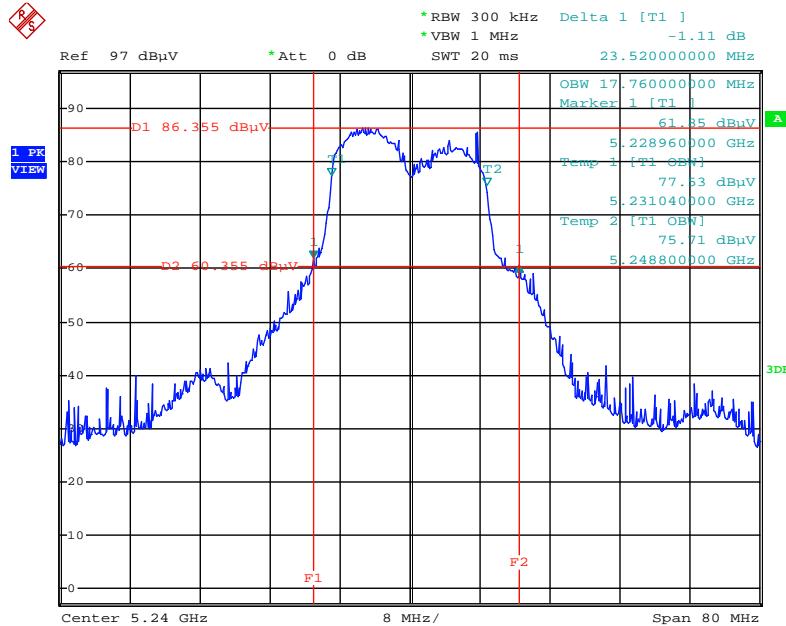


Date: 12.NOV.2014 16:33:48

### 26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 3 + Chain 5 / 5190 MHz

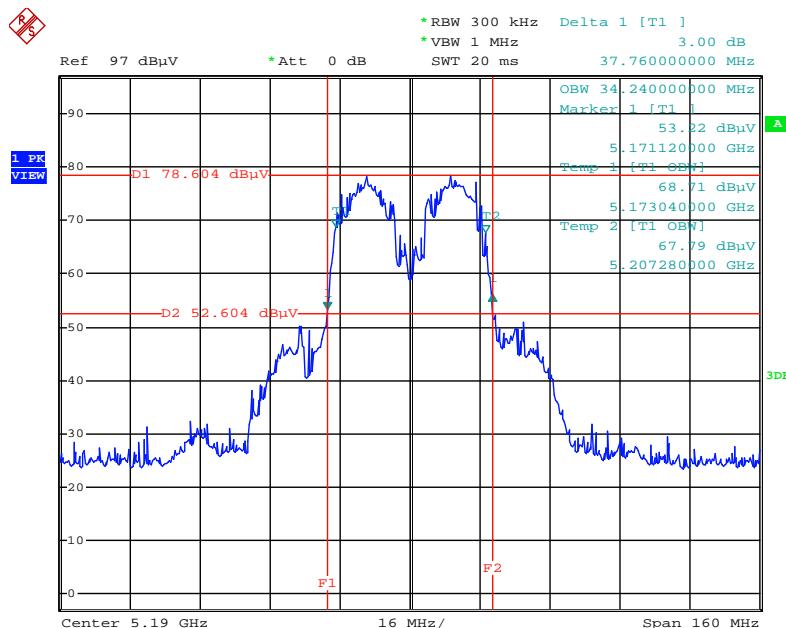


Date: 12.NOV.2014 16:36:48

### 26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 3 + Chain 5 / 5230 MHz

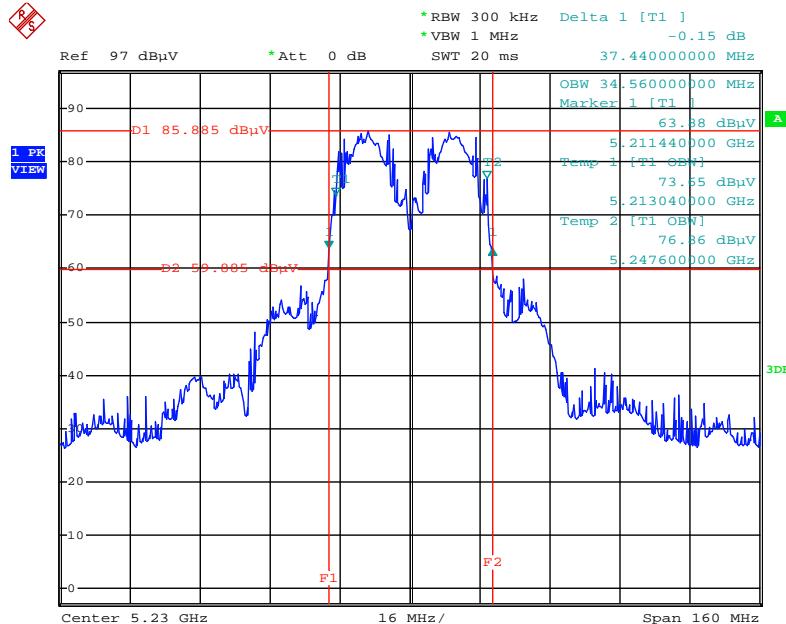


Date: 12.NOV.2014 16:37:30

### 26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 3 + Chain 5 / 5210 MHz

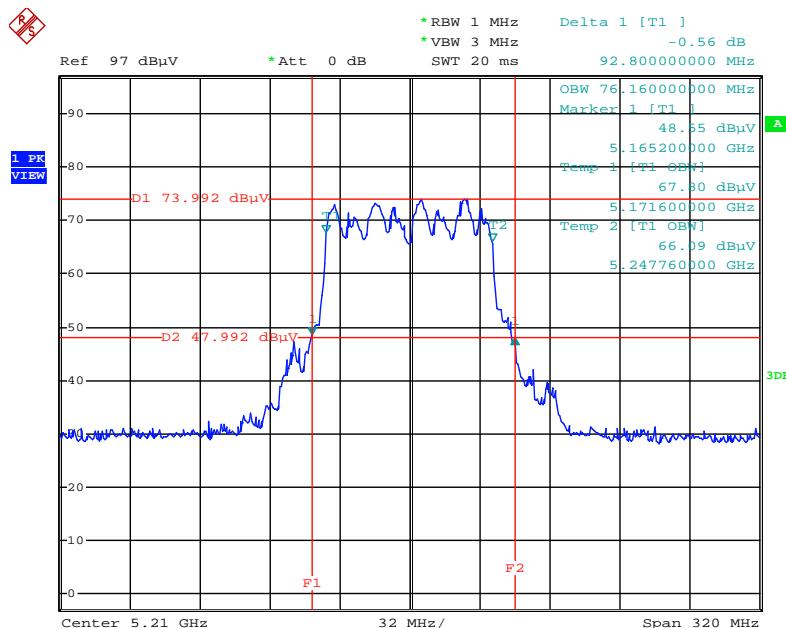


Date: 12.NOV.2014 16:38:41

### 26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 3 + Chain 5 / 5180 MHz

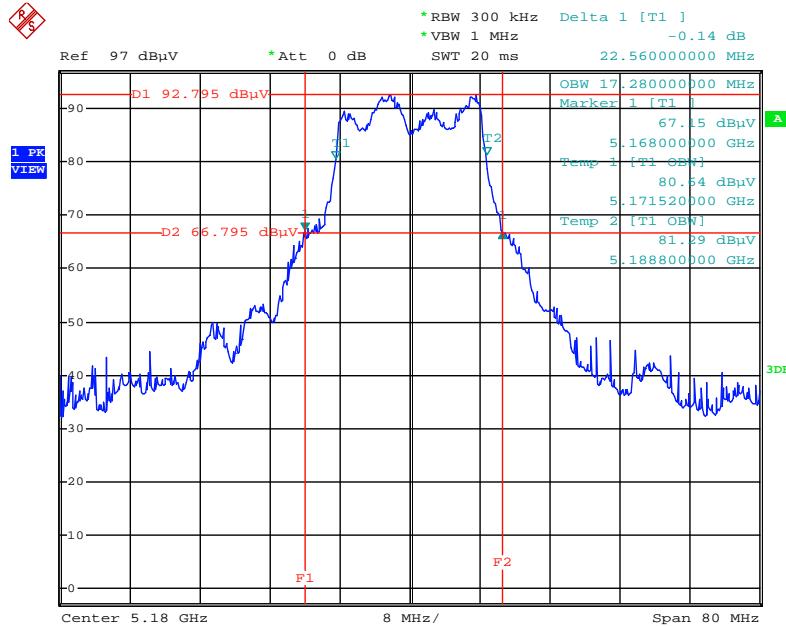


Date: 12.NOV.2014 16:26:37

### 26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 3 + Chain 5 / 5200 MHz

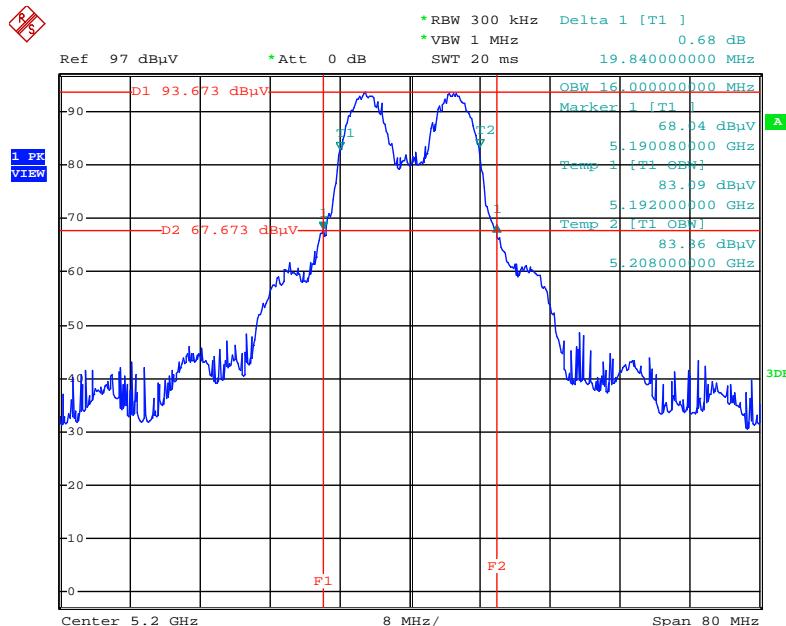

Date: 12.NOV.2014 16:27:54

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 3 + Chain 5 / 5240 MHz**

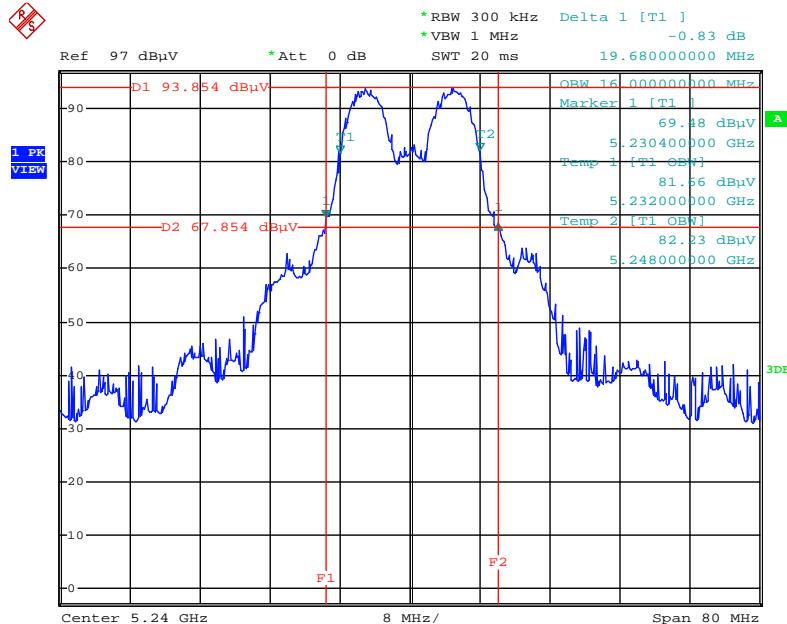

Date: 12.NOV.2014 16:29:31

## 4.3. Maximum Conducted Output Power Measurement

### 4.3.1. Limit

Frequency Band	Limit
5.15~5.25 GHz	
Operating Mode	
<input type="checkbox"/> Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
<input checked="" type="checkbox"/> Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/> Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
<input type="checkbox"/> Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power => 3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout

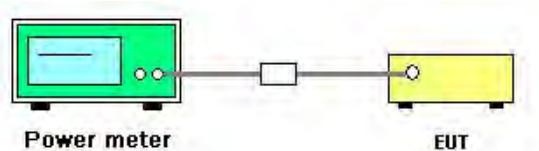

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac
Test Date	Nov. 12, 2014		

## Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 3	Chain 5	Total		
36	5180 MHz	22.23	20.93	21.02	26.21	30.00	Complies
40	5200 MHz	24.49	23.23	21.88	28.10	30.00	Complies
48	5240 MHz	23.83	23.31	22.39	27.99	30.00	Complies

## Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 3	Chain 5	Total		
38	5190 MHz	16.96	15.37	15.78	20.86	30.00	Complies
46	5230 MHz	25.08	24.11	24.18	29.25	30.00	Complies

## Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 3	Chain 5	Total		
42	5210 MHz	11.34	10.07	10.21	15.35	30.00	Complies

<b>Temperature</b>	26°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11a
<b>Test Date</b>	Nov. 12, 2014		

**Configuration IEEE 802.11a**

<b>Channel</b>	<b>Frequency</b>	<b>Conducted Power (dBm)</b>				<b>Max. Limit (dBm)</b>	<b>Result</b>
		<b>Chain 1</b>	<b>Chain 3</b>	<b>Chain 5</b>	<b>Total</b>		
36	5180 MHz	24.02	23.04	23.42	28.28	30.00	Complies
40	5200 MHz	23.98	22.89	22.71	28.00	30.00	Complies
48	5240 MHz	23.86	23.01	22.54	27.94	30.00	Complies

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band	Limit	
5.15~5.25 GHz		
Operating Mode		
<input type="checkbox"/> Outdoor access point	17 dBm/MHz	
<input checked="" type="checkbox"/> Indoor access point	17 dBm/MHz	
<input type="checkbox"/> Fixed point-to-point access points	17 dBm/MHz	
<input type="checkbox"/> Mobile and portable client devices	11 dBm/MHz	

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

#### 4.4.4. Test Setup Layout

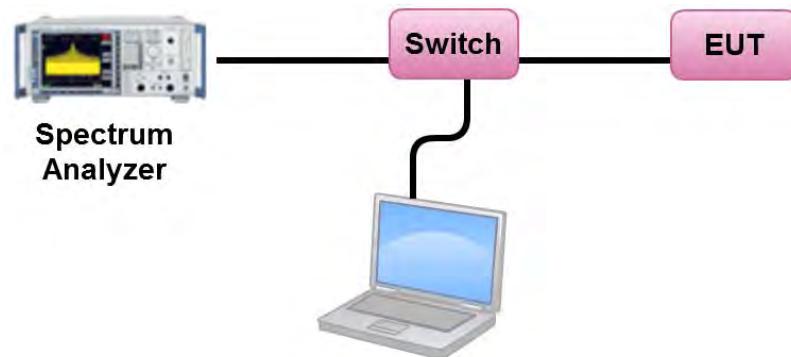

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac
Test Date	Nov. 12, 2014		

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 3 + Chain 5

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	12.97	15.11	Complies
40	5200 MHz	14.83	15.11	Complies
48	5240 MHz	14.88	15.11	Complies

Note:  $Directional\ Gain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.89 \text{dBi} > 6 \text{dBi}$ , So Band1 Limit =  $17 - (7.89 - 6) = 15.11 \text{dBm/MHz}$

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 3 + Chain 5

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	4.50	15.11	Complies
46	5230 MHz	12.97	15.11	Complies

Note:  $Directional\ Gain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.89 \text{dBi} > 6 \text{dBi}$ , So Band1 Limit =  $17 - (7.89 - 6) = 15.11 \text{dBm/MHz}$

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 3 + Chain 5

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-4.44	15.11	Complies

Note:  $Directional\ Gain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.89 \text{dBi} > 6 \text{dBi}$ , So Band1 Limit =  $17 - (7.89 - 6) = 15.11 \text{dBm/MHz}$

Temperature	26°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a
Test Date	Nov. 12, 2014		

**Configuration IEEE 802.11a / Chain 1 + Chain 3 + Chain 5**


Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	14.54	15.11	Complies
40	5200 MHz	14.85	15.11	Complies
48	5240 MHz	14.82	15.11	Complies

Note:  $Directional\ Gain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{\text{ANT}}} \left\{ \sum_{k=1}^{N_{\text{ANT}}} g_{j,k} \right\}^2}{N_{\text{ANT}}} \right] = 7.89 \text{dBi} > 6 \text{dBi}$ , So Band1 Limit =  $17 - (7.89 - 6) = 15.11 \text{dBm/MHz}$


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 3 + Chain 5 / 5240 MHz**

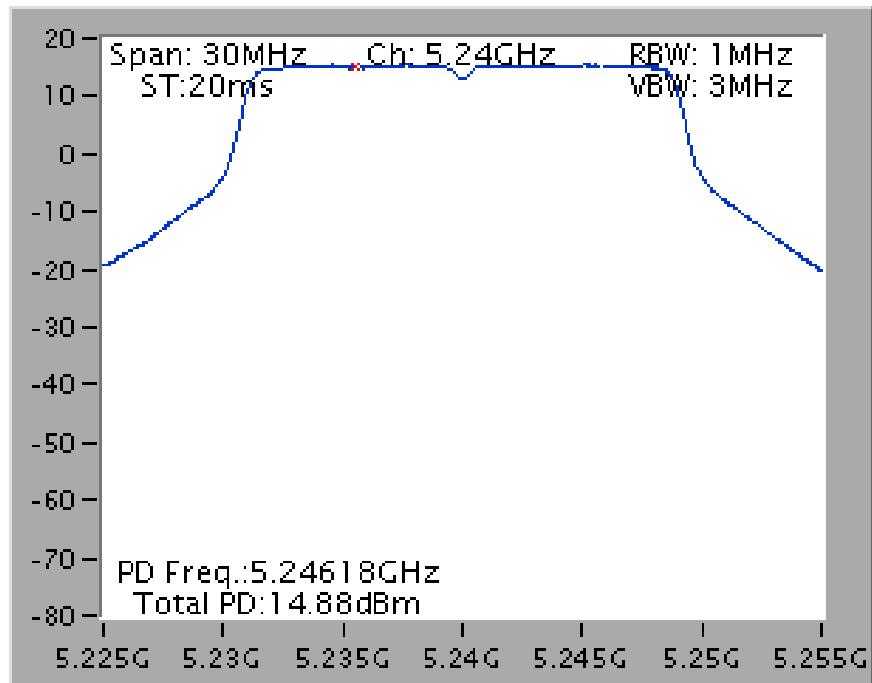


**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 3 + Chain 5 / 5230 MHz**

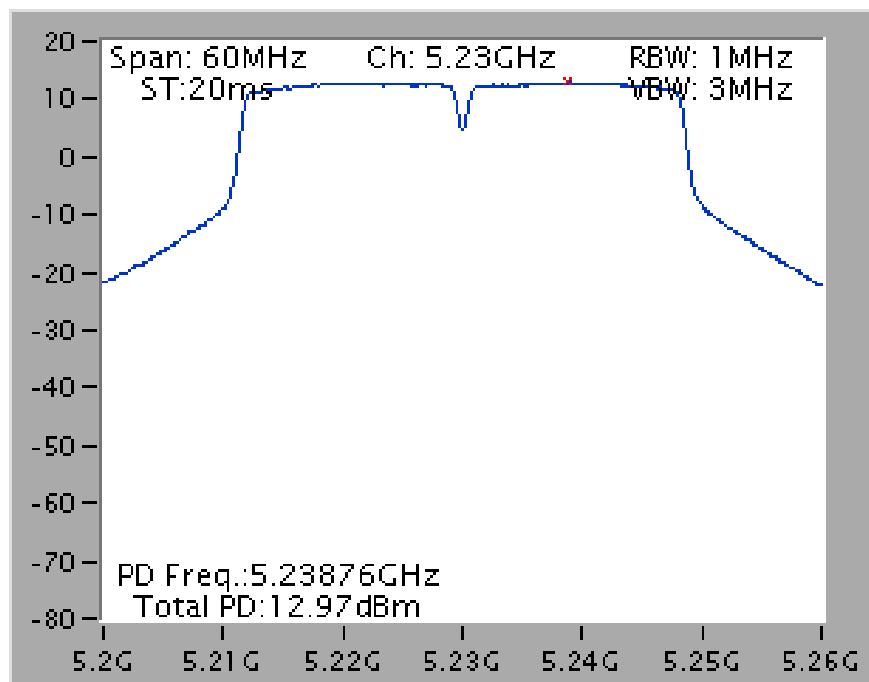

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 3 + Chain 5 / 5210 MHz**

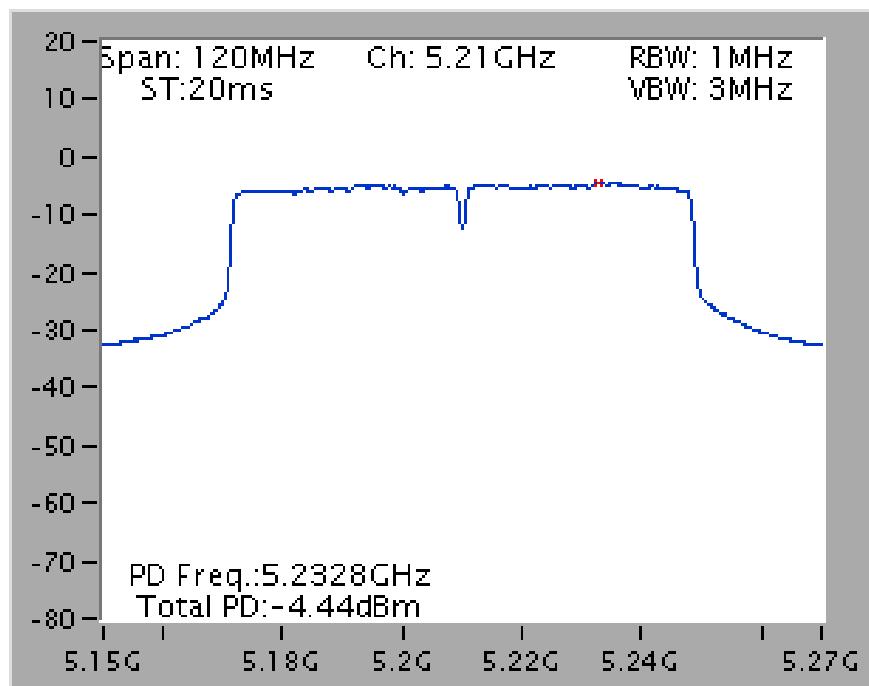

**Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 3 + Chain 5 / 5200 MHz**

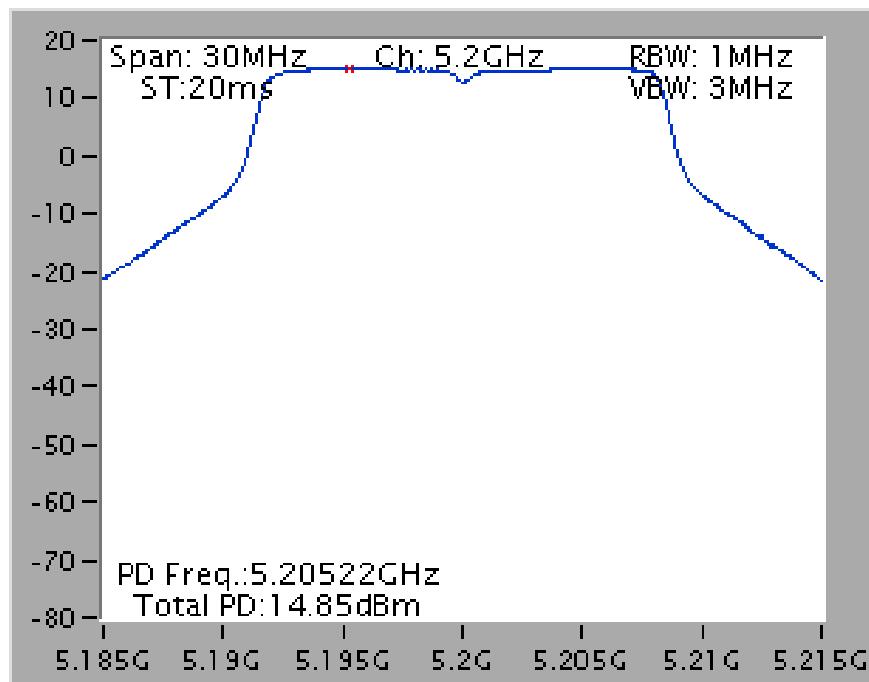

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

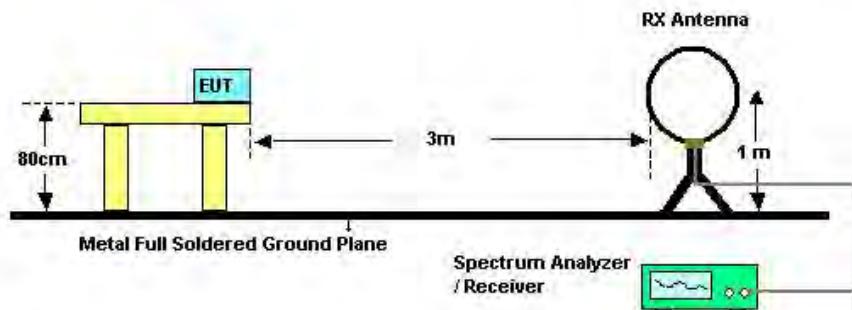

For Radiated Emissions: 30MHz~1GHz

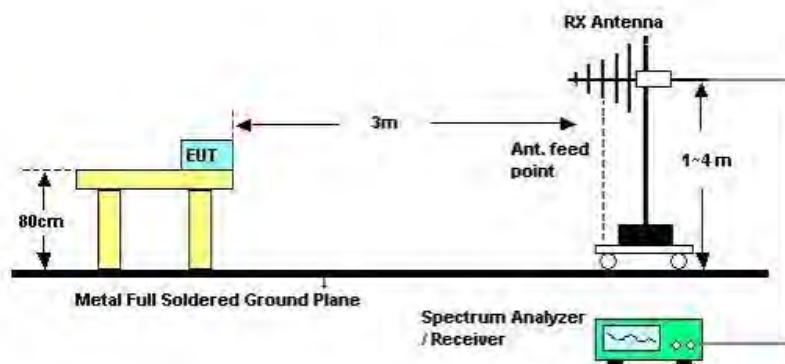

For Radiated Emissions: Above 1GHz

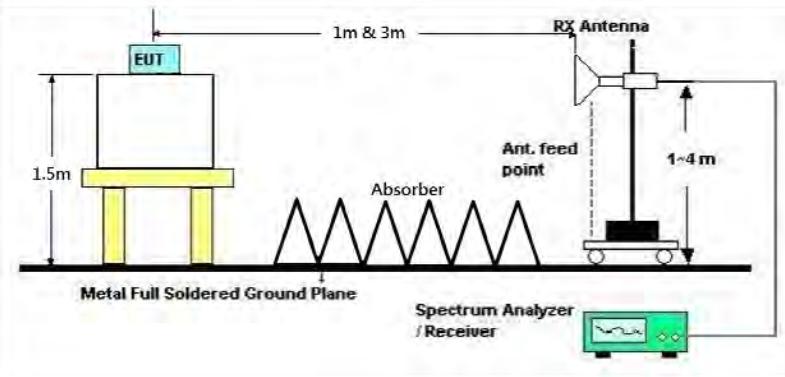

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	55%
Test Engineer	Kane Liu	Configurations	Normal Link / Mode 4
Test Date	Oct. 20, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	Normal Link / Mode 4

##### Horizontal

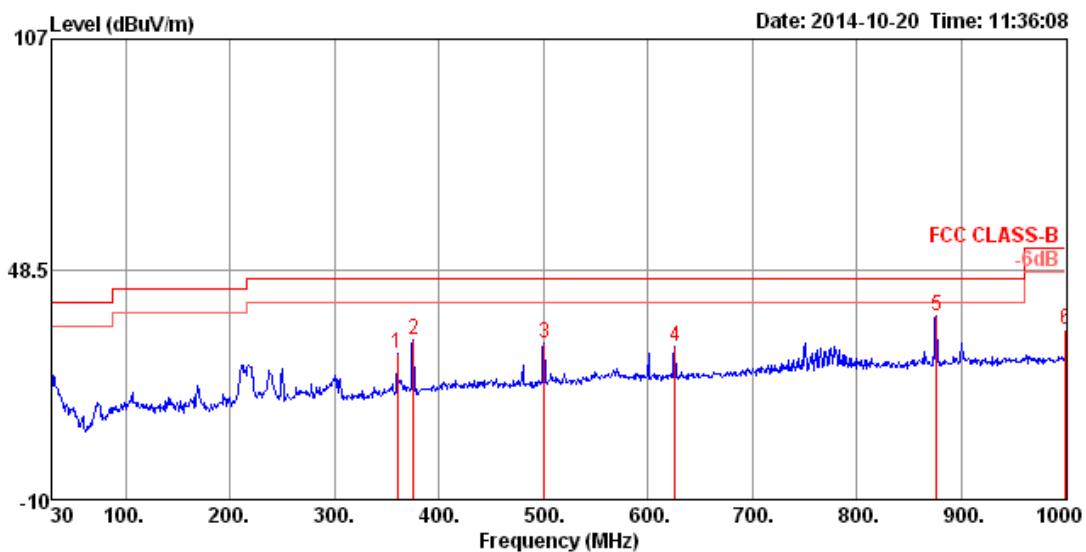

Freq	Level	Limit	Over	Read	Cable			A/Pos	T/Pos	Pol/Phase	Remark
					Line	Limit	Level				
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg	
1	359.80	27.23	46.00	-18.77	41.55	2.35	14.66	31.33	125	98	HORIZONTAL Peak
2	375.32	30.60	46.00	-15.40	44.66	2.44	14.93	31.43	125	78	HORIZONTAL Peak
3	500.45	29.70	46.00	-16.30	41.37	2.82	16.92	31.41	200	230	HORIZONTAL Peak
4	625.58	28.64	46.00	-17.36	38.24	3.19	18.62	31.41	150	214	HORIZONTAL Peak
5	875.84	36.61	46.00	-9.39	43.60	3.90	20.25	31.14	150	161	HORIZONTAL Peak
6	1000.00	33.13	54.00	-20.87	38.66	4.21	21.44	31.18	100	274	HORIZONTAL Peak

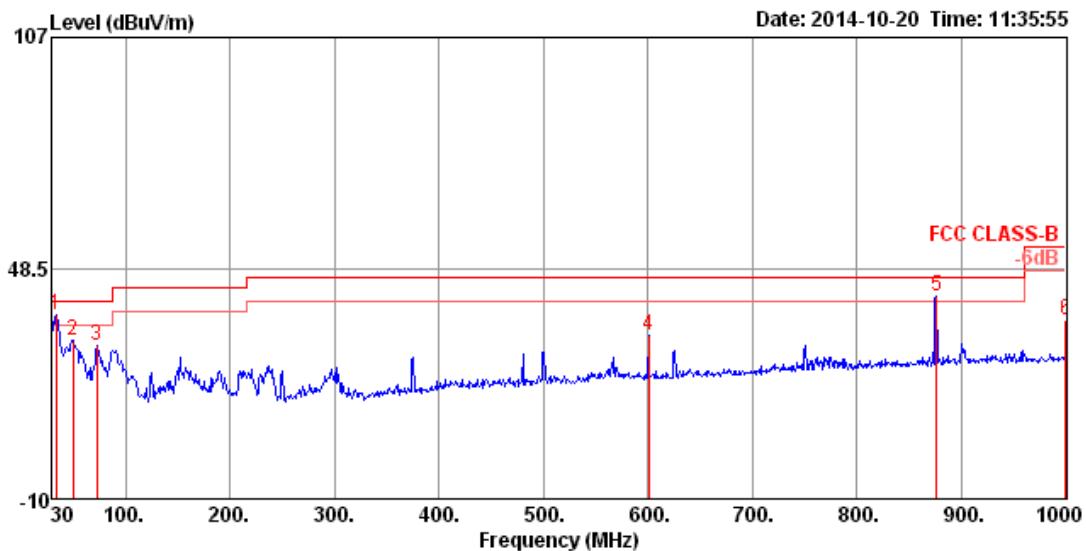**Vertical**


Freq	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	Level	Line									
MHz	dBuV/m	dBuV/m									
1	33.88	36.81	40.00	-3.19	52.16	0.68	15.83	31.86	100	283	VERTICAL Peak
2	49.40	30.11	40.00	-9.89	53.19	0.83	7.88	31.79	100	271	VERTICAL Peak
3	72.68	28.99	40.00	-11.01	54.07	1.01	5.64	31.73	200	75	VERTICAL Peak
4	600.36	31.61	46.00	-14.39	41.28	3.12	18.45	31.24	100	207	VERTICAL Peak
5	875.84	41.56	46.00	-4.44	48.55	3.90	20.25	31.14	150	254	VERTICAL Peak
6	1000.00	35.22	54.00	-18.78	40.75	4.21	21.44	31.18	125	234	VERTICAL Peak

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.5.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 3 + Chain 5
Test Date	Nov. 04, 2014		

## Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			deg	cm		
1	10362.56	45.83	54.00	-8.17	32.08	10.15	39.01	35.41	59	246	Average	HORIZONTAL	
2	10364.89	59.11	74.00	-14.89	45.36	10.15	39.01	35.41	59	246	Peak	HORIZONTAL	

## Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			deg	cm		
1	10352.15	57.26	74.00	-16.74	43.50	10.15	39.02	35.41	63	179	Peak	VERTICAL	
2	10363.69	45.17	54.00	-8.83	31.42	10.15	39.01	35.41	63	179	Average	VERTICAL	

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 3 + Chain 5
Test Date	Nov. 04, 2014		

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10397.76	49.52	54.00	-4.48	35.78	10.13	38.98	35.37	61	173	Average	HORIZONTAL
2	10400.64	63.00	74.00	-11.00	49.26	10.13	38.98	35.37	61	173	Peak	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10399.60	58.43	74.00	-15.57	44.69	10.13	38.98	35.37	27	105	Peak	VERTICAL
2	10401.28	45.87	54.00	-8.13	32.13	10.13	38.98	35.37	27	105	Average	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 3 + Chain 5
Test Date	Nov. 04, 2014		

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10478.48	50.75	54.00	-3.25	37.06	10.10	38.91	35.32	61	178	Average	HORIZONTAL
2	10479.28	64.35	74.00	-9.65	50.66	10.10	38.91	35.32	61	178	Peak	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10484.01	59.29	74.00	-14.71	45.60	10.10	38.91	35.32	27	100	Peak	VERTICAL
2	10484.81	46.34	54.00	-7.66	32.65	10.10	38.91	35.32	27	100	Average	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 3 + Chain 5
Test Date	Nov. 04, 2014		

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15562.55	44.50	54.00	-9.50	28.69	12.58	38.40	35.17	144	157	Average	HORIZONTAL	
2	15589.23	57.19	74.00	-16.81	41.41	12.58	38.38	35.18	144	157	Peak	HORIZONTAL	

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15548.77	57.90	74.00	-16.10	42.06	12.58	38.43	35.17	256	170	Peak	VERTICAL	
2	15577.21	44.65	54.00	-9.35	28.85	12.58	38.40	35.18	256	170	Average	VERTICAL	

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 3 + Chain 5
Test Date	Nov. 04, 2014		

**Horizontal**

Freq	Level	Limit		Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB									
MHz	dBuV/m	dBuV/m	dB									
1	10456.55	62.08	74.00	-11.92	48.37	10.11	38.94	35.34	51	193	Peak	HORIZONTAL
2	10459.12	48.07	54.00	-5.93	34.36	10.11	38.94	35.34	51	193	Average	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB									
MHz	dBuV/m	dBuV/m	dB									
1	10460.64	45.78	54.00	-8.22	32.08	10.11	38.93	35.34	32	123	Average	VERTICAL
2	10460.72	59.15	74.00	-14.85	45.45	10.11	38.93	35.34	32	123	Peak	VERTICAL

<b>Temperature</b>	26°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Satoshi Yang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 3 + Chain 5
<b>Test Date</b>	Nov. 04, 2014		

**Horizontal**

Freq	Level	Limit		Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Over Limit								
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	deg	cm	
1	15635.13	44.75	54.00	-9.25	29.05	12.58	38.31	35.19	199	175	Average HORIZONTAL
2	15645.30	58.55	74.00	-15.45	42.85	12.58	38.31	35.19	199	175	Peak HORIZONTAL

**Vertical**

Freq	Level	Limit		Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Over Limit								
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	deg	cm	
1	15632.40	57.68	74.00	-16.32	41.98	12.58	38.31	35.19	223	177	Peak VERTICAL
2	15652.52	44.60	54.00	-9.40	28.94	12.58	38.28	35.20	223	177	Average VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11a CH 36 / Chain 1 + Chain 3 + Chain 5
Test Date	Nov. 03, 2014		

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10361.28	48.04	54.00	-5.96	32.64	10.15	39.01	33.76	64	242	Average	HORIZONTAL
2	10361.68	62.26	74.00	-11.74	46.86	10.15	39.01	33.76	64	242	Peak	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10353.11	59.17	74.00	-14.83	43.74	10.15	39.02	33.74	31	100	Peak	VERTICAL
2	10361.68	44.77	54.00	-9.23	29.37	10.15	39.01	33.76	31	100	Average	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11a CH 40 / Chain 1 + Chain 3 + Chain 5
Test Date	Nov. 03, 2014		

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10398.00	63.14	74.00	-10.86	49.40	10.13	38.98	35.37	57	183 Peak	HORIZONTAL
2	10398.24	50.06	54.00	-3.94	36.32	10.13	38.98	35.37	57	183 Average	HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10391.51	61.56	74.00	-12.44	47.82	10.14	38.99	35.39	29	106 Peak	VERTICAL
2	10400.88	48.58	54.00	-5.42	34.84	10.13	38.98	35.37	29	106 Average	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11a CH 48 / Chain 1 + Chain 3 + Chain 5
Test Date	Nov. 03, 2014		

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10478.00	63.80	74.00	-10.20	48.78	10.10	38.91	33.99	65	207 Peak	HORIZONTAL
2	10478.48	50.51	54.00	-3.49	35.50	10.10	38.91	34.00	65	207 Average	HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10480.48	49.04	54.00	-4.96	34.03	10.10	38.91	34.00	29	103 Average	VERTICAL
2	10480.64	61.68	74.00	-12.32	46.67	10.10	38.91	34.00	29	103 Peak	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for Peak

### 4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.

### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

### 4.6.5. Test Deviation

There is no deviation with the original standard.

### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 3 + Chain 5
Test Date	Nov. 03, 2014		

##### Channel 36

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB			deg		cm	
1	5150.00	52.93	54.00	-1.07	46.19	6.21	34.11	33.58	66	100	Average	HORIZONTAL	
2	5150.00	70.03	74.00	-3.97	63.29	6.21	34.11	33.58	66	100	Peak	HORIZONTAL	
3	5186.73	117.58			110.75	6.24	34.16	33.57	66	100	Peak	HORIZONTAL	
4	5187.69	107.43			100.60	6.24	34.16	33.57	66	100	Average	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB			deg		cm	
1	5138.14	69.80	74.00	-4.20	63.13	6.17	34.09	33.59	66	100	Peak	HORIZONTAL	
2	5148.08	52.69	54.00	-1.31	45.95	6.21	34.11	33.58	66	100	Average	HORIZONTAL	
3	5194.23	121.39			114.53	6.24	34.18	33.56	66	100	Peak	HORIZONTAL	
4	5208.01	111.41			104.50	6.27	34.20	33.56	66	100	Average	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB			deg		cm	
1	5081.09	49.74	54.00	-4.26	43.22	6.11	34.02	33.61	63	211	Average	HORIZONTAL	
2	5150.00	69.69	74.00	-4.31	62.95	6.21	34.11	33.58	63	211	Peak	HORIZONTAL	
3	5235.19	121.92			114.94	6.30	34.23	33.55	63	211	Peak	HORIZONTAL	
4	5241.60	112.15			105.15	6.30	34.25	33.55	63	211	Average	HORIZONTAL	
5	5350.00	49.41	54.00	-4.59	42.06	6.47	34.39	33.51	63	211	Average	HORIZONTAL	
6	5366.03	65.28	74.00	-8.72	57.90	6.47	34.41	33.50	63	211	Peak	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 3 + Chain 5
Test Date	Nov. 03, 2014		

### Channel 38

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB			deg	cm		
1	5150.00	52.85	54.00	-1.15	46.11	6.21	34.11	33.58	59	209	Average	HORIZONTAL	
2	5150.00	65.30	74.00	-8.70	58.56	6.21	34.11	33.58	59	209	Peak	HORIZONTAL	
3	5191.60	105.29	-	-	98.44	6.24	34.18	33.57	59	209	Peak	HORIZONTAL	
4	5191.92	95.75	-	-	88.90	6.24	34.18	33.57	59	209	Average	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 5190 MHz.

### Channel 46

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB			deg	cm		
1	5134.14	66.72	74.00	-7.28	60.05	6.17	34.09	33.59	68	200	Peak	HORIZONTAL	
2	5150.00	52.68	54.00	-1.32	45.94	6.21	34.11	33.58	68	200	Average	HORIZONTAL	
3	5219.90	107.74	-	-	100.83	6.27	34.20	33.56	68	200	Average	HORIZONTAL	
4	5220.87	117.31	-	-	110.36	6.30	34.20	33.55	68	200	Peak	HORIZONTAL	
5	5350.00	47.79	54.00	-6.21	40.44	6.47	34.39	33.51	68	200	Average	HORIZONTAL	
6	5351.44	63.45	74.00	-10.55	56.10	6.47	34.39	33.51	68	200	Peak	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 3 + Chain 5
Test Date	Nov. 03, 2014		

**Channel 42**

Freq	Level	Limit		Over Line	Read Level	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5150.00	52.95	54.00	-1.05	46.21	6.21	34.11	33.58	66	206	Average	HORIZONTAL
2	5150.00	65.39	74.00	-8.61	58.65	6.21	34.11	33.58	66	206	Peak	HORIZONTAL
3	5216.25	100.08	74.00			6.27	34.20	33.56	66	206	Peak	HORIZONTAL
4	5230.19	90.38	54.00			6.30	34.23	33.55	66	206	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	26°C	Humidity	68%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11a CH 36, 40, 48 / Chain 1 + Chain 3 + Chain 5
Test Date	Nov. 03, 2014		

### Channel 36

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB					
1	5148.24	68.98	74.00	-5.02	62.24	6.21	34.11	33.58	359	101	Peak	VERTICAL	
2	5150.00	52.79	54.00	-1.21	46.05	6.21	34.11	33.58	359	101	Average	VERTICAL	
3	5180.96	106.28			99.45	6.24	34.16	33.57	359	101	Average	VERTICAL	
4	5180.96	117.98			111.15	6.24	34.16	33.57	359	101	Peak	VERTICAL	

Item 3, 4 are the fundamental frequency at 5180 MHz.

### Channel 40

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB					
1	5147.12	52.71	54.00	-1.29	45.97	6.21	34.11	33.58	65	100	Average	HORIZONTAL	
2	5149.04	69.58	74.00	-4.42	62.84	6.21	34.11	33.58	65	100	Peak	HORIZONTAL	
3	5206.73	110.46			103.57	6.27	34.18	33.56	65	100	Average	HORIZONTAL	
4	5206.73	121.47			114.58	6.27	34.18	33.56	65	100	Peak	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 5200 MHz.

### Channel 48

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB					
1	5144.55	60.91	74.00	-13.09	54.17	6.21	34.11	33.58	70	100	Peak	HORIZONTAL	
2	5150.00	47.00	54.00	-7.00	40.26	6.21	34.11	33.58	70	100	Average	HORIZONTAL	
3	5239.04	111.33			104.35	6.30	34.23	33.55	70	100	Average	HORIZONTAL	
4	5239.36	118.61			111.63	6.30	34.23	33.55	70	100	Peak	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 5240 MHz.

### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.7. Frequency Stability Measurement

### 4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c-f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $0^\circ\text{C} \sim 40^\circ\text{C}$ .

### 4.7.4. Test Setup Layout

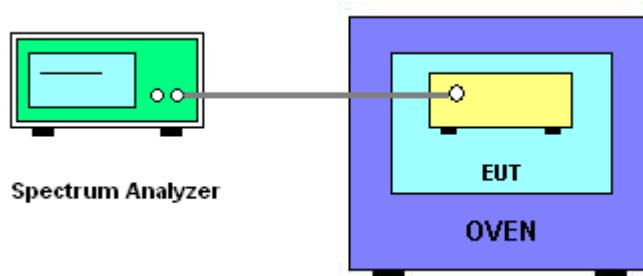

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.7.7. Test Result of Frequency Stability

Temperature	26°C	Humidity	61%
Test Engineer	YC Chen	Test Date	Nov. 12, 201

##### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5199.9930
110.00	5199.9940
93.50	5199.9960
Max. Deviation (MHz)	0.007000
Max. Deviation (ppm)	1.35

##### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
0	5199.9960
10	5199.9980
20	5200.0000
30	5200.0000
40	5200.0010
Max. Deviation (MHz)	0.008000
Max. Deviation (ppm)	1.54

## 4.8. Antenna Requirements

### 4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 11, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	--	26GHz ~ 40GHz	Feb. 17, 2014	Radiation (03CH04-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Dec. 02, 2013	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Dec. 02, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%