




SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Arcadyan Technology Corporation
Applicant Address	4F, No. 9, Park Avenue II, Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C.
FCC ID	RAXWN6401F
Manufacturer's company	Arcadyan Technology Corporation
Manufacturer Address	4F, No. 9, Park Avenue II, Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C.

Product Name	mini-PCI wireless module
Brand Name	Fortinet
Model Name	WN6401F-IM
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Receive Date	Dec. 13, 2005
Test Date	Jan. 19, 2006
Submission Type	Original Equipment

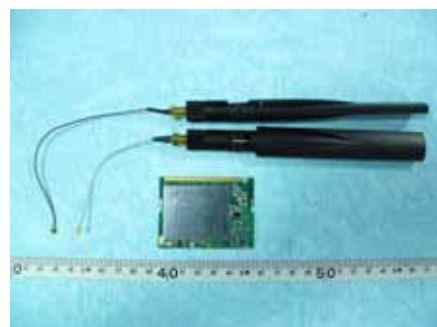

Statement

Test result included is only for the 802.11b/g part and 802.11a (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

NVLAQ®

Lab Code: 200079-0

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Table for Filed Antenna.....	3
3.3. Table for Carrier Frequencies	4
3.4. Table for Test Modes	5
3.5. Table for Testing Locations.....	5
3.6. Table for Supporting Units	5
3.7. Table for Parameters of Test Software Setting	6
3.8. Test Configurations	7
4. TEST RESULT	9
4.1. AC Power Line Conducted Emissions Measurement.....	9
4.2. Maximum Peak Output Power Measurement	13
4.3. Power Spectral Density Measurement	15
4.4. 6dB Spectrum Bandwidth Measurement	23
4.5. Radiated Emissions Measurement	32
4.6. Band Edge Emissions Measurement	64
4.7. Antenna Requirements	84
5. LIST OF MEASURING EQUIPMENTS	85
6. SPORTON COMPANY PROFILE	87
6.1. Test Location.....	87
7. NVLAP CERTIFICATE OF ACCREDITATION	88
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A5
APPENDIX B. TEST PHOTOS.....	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~ C3



History of This Test Report

Original Issue Date: Jan. 19, 2006

Report No.: FR5D1401

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

1. CERTIFICATE OF COMPLIANCE

Product Name : mini-PCI wireless module
Brand Name : Fortinet
Model Name : WN6401F-IM
Applicant : Arcadyan Technology Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Dec. 13, 2005 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu / Supervisor
Sporton International Inc.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	15.44 dB
4.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Complies	7.20 dB
4.3	15.247(e)	Power Spectral Density	Complies	16.49 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.32 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.32 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.26dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.71dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±6.25×10 ⁻⁷	Confidence levels of 95%
Radiated Emissions/ Band Edge Emissions	±3.72dB	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

EUT is a mini-PCI wireless module with IEEE 802.11a/b/g radio functions. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Product Type	WLAN
Radio Type	Intentional Transceiver
Power Type	3.3V DC form host system (NB)
Interface Type	NA
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54/108)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	Please refer to section 3.3
Channel Band Width (99%)	11b: 15.64 MHz ; 11g: 16.56 MHz ; 11a: 16.56 MHz 11g Turbo: 32.96 MHz ; 11a Turbo: 32.88 MHz
Conducted Output Power	11b: 17.60 dBm ; 11g: 22.80 dBm ; 11a: 22.20 dBm 11g Turbo: 22.40 dBm ; 11a Turbo: 22.40 dBm
Carrier Frequencies	Please refer to section 3.3
Antenna	Please refer to section 3.2

3.2. Table for Filed Antenna

For 2.4GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	smartant	SAA05-220170	Dual-Band Omni-Directional Antenna	Revise-SMA	2.5

For 5GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	smartant	SAA05-220170	Dual-Band Omni-Directional Antenna	Revise-SMA	5.0

3.3. Table for Carrier Frequencies

Frequency Allocation for 802.11b/g

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400 ~ 2483.5MHz	1	2412 MHz	Turbo 6	2437 MHz
	2	2417 MHz		
	3	2422 MHz		
	4	2427 MHz		
	5	2432 MHz		
	6	2437 MHz		
	7	2442 MHz		
	8	2447 MHz		
	9	2452 MHz		
	10	2457 MHz		
	11	2462 MHz		

Frequency Allocation for 802.11a

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725 ~ 5850 MHz (USA/Canada/Taiwan) Band 3	149	5745 MHz	Turbo 152	5760 MHz
	153	5765 MHz	Turbo 160	5800 MHz
	157	5785 MHz		
	161	5805 MHz		
	165	5825 MHz		

3.4. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
AC Power Line Conducted Emissions	Normal Link	11 Mbps	6
Max. Peak Conducted Output Power Power Spectral Density 6dB Spectrum Bandwidth	11b/CCK	11 Mbps	1/6/11
	11g/BPSK	6 Mbps	1/6/11
	11g/BPSK Turbo	12 Mbps	6
	11a/BPSK	6 Mbps	149/157/165
	11a/BPSK Turbo	12 Mbps	152/160
Radiated Emissions Below 1GHz	11g/BPSK	6 Mbps	6/157
Radiated Emissions Above 1GHz Band Edge Emissions	11b/CCK	11 Mbps	1/11
	11g/BPSK	6 Mbps	1/11
	11g/BPSK Turbo	12 Mbps	6
	11a/BPSK	6 Mbps	149/165
	11a/BPSK Turbo	12 Mbps	152/160

3.5. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.6. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	PP01L	DoC
Modem	ACEEX	DM-1414	IFAXDM1414
Printer	EPSON	LQ-300	DoC

3.7. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11b/g


Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	15	16	16
IEEE 802.11g	14	18	16
IEEE 802.11g Turbo	-	18	-

Power Parameters of IEEE 802.11a

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	18	18	18
Frequency	5760 MHz	5800 MHz	-
IEEE 802.11a Turbo	18	18	-


3.8. Test Configurations

3.8.1. Radiation Emissions Test Configuration

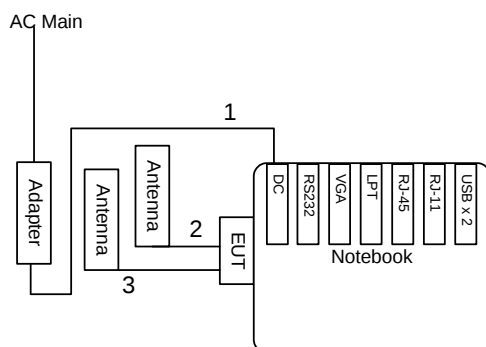

1. DC power line, 1.5m, No-shielding
2. RF Cable, 10cm, Shielding
3. RF Cable, 15cm, Shielding

3.8.2. AC Power Line Conduction Emissions Test Configuration

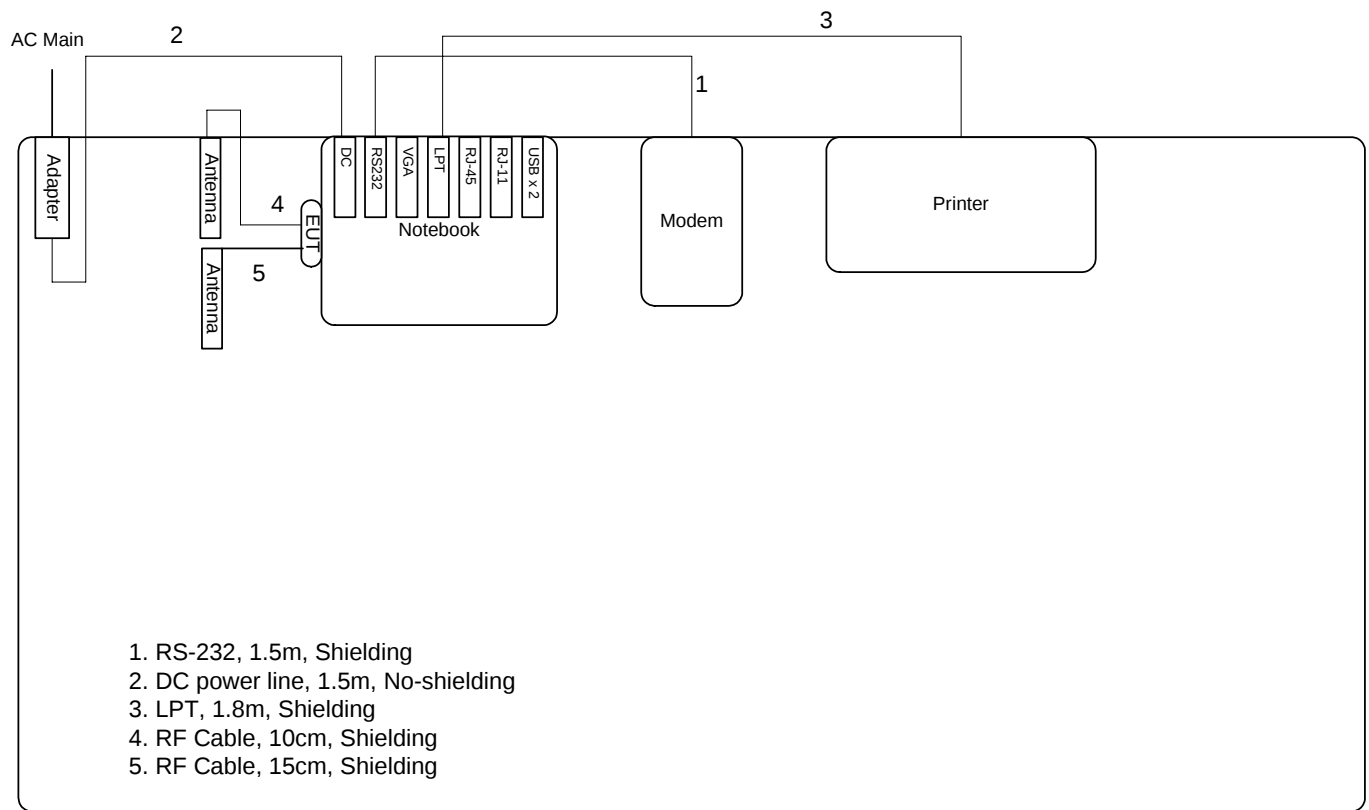

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

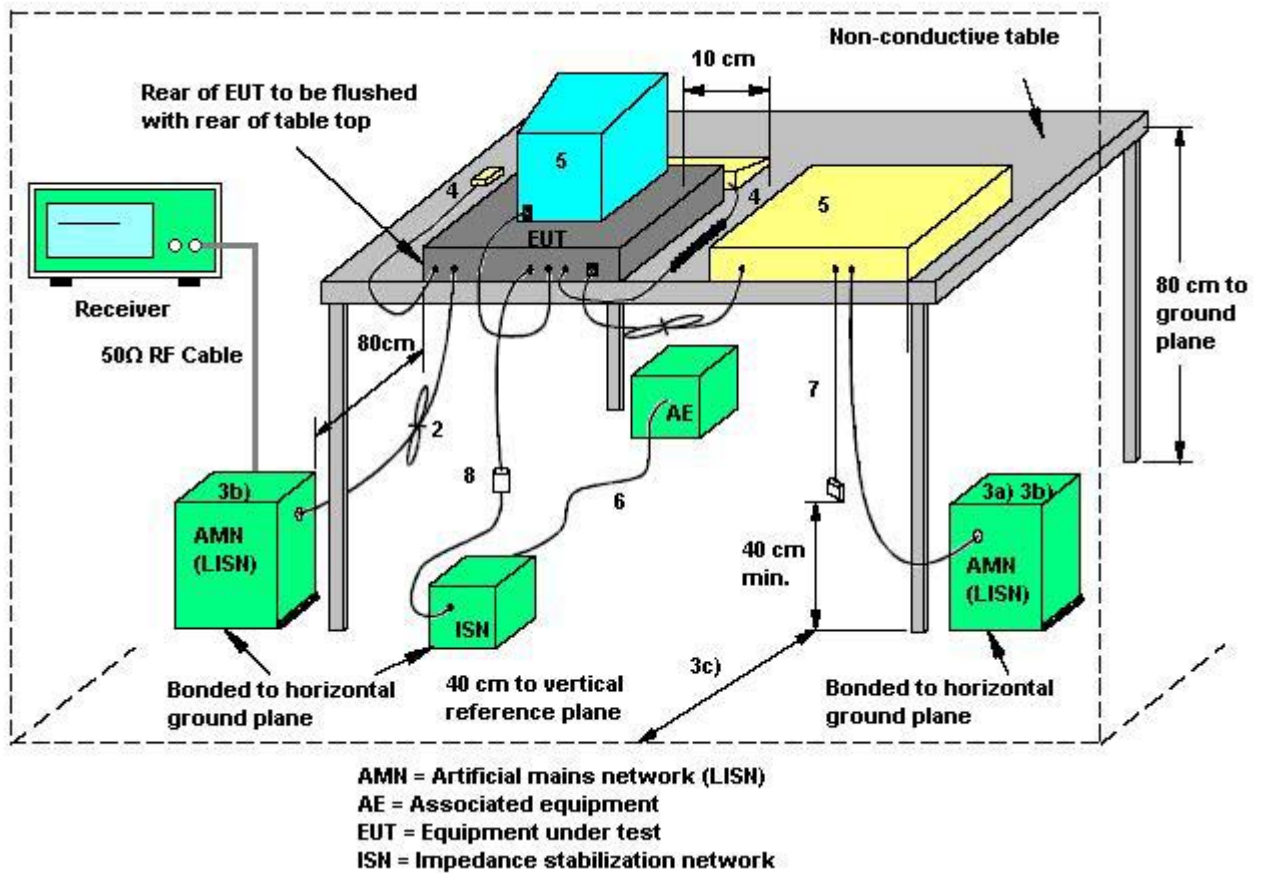

1. If cables, which hang closer than 40 cm to the horizontal metal groundplane, cannot be shortened to appropriate length, the excess shall be folded back and forth forming a bundle 30 cm to 40 cm long.
2. Excess mains cord shall be bundled in the centre or shortened to appropriate length.
3. EUT is connected to one artificial mains network (AMN). All AMNs and ISNs may alternatively be connected to a vertical reference plane or metal wall.
4. All other units of a system are powered from a second AMN. A multiple outlet strip can be used for multiple mains cords.
5. AMN and ISN are 80 cm from the EUT and at least 80 cm from other units and other metal planes.
6. Mains cords and signal cables shall be positioned for their entire lengths, as far as possible, at 40 cm from the vertical reference plane.
7. Cables of hand operated devices, such as keyboards, mice, etc. shall be placed as for normal usage.
8. Peripherals shall be placed at a distance of 10 cm from each other and from the controller, except for the monitor which, if this is an acceptable installation practice, shall be placed directly on the top of the controller.
9. I/O signal cable intended for external connection.
10. The end of the I/O signal cables which are not connected to an AE may be terminated, if required, using correct terminating impedance.
11. If used, the current probe shall be placed at 0,1 m from the ISN.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	20	Humidity	64%
Test Engineer	Stan Peng	Phase	Line
Configuration	Normal Use		

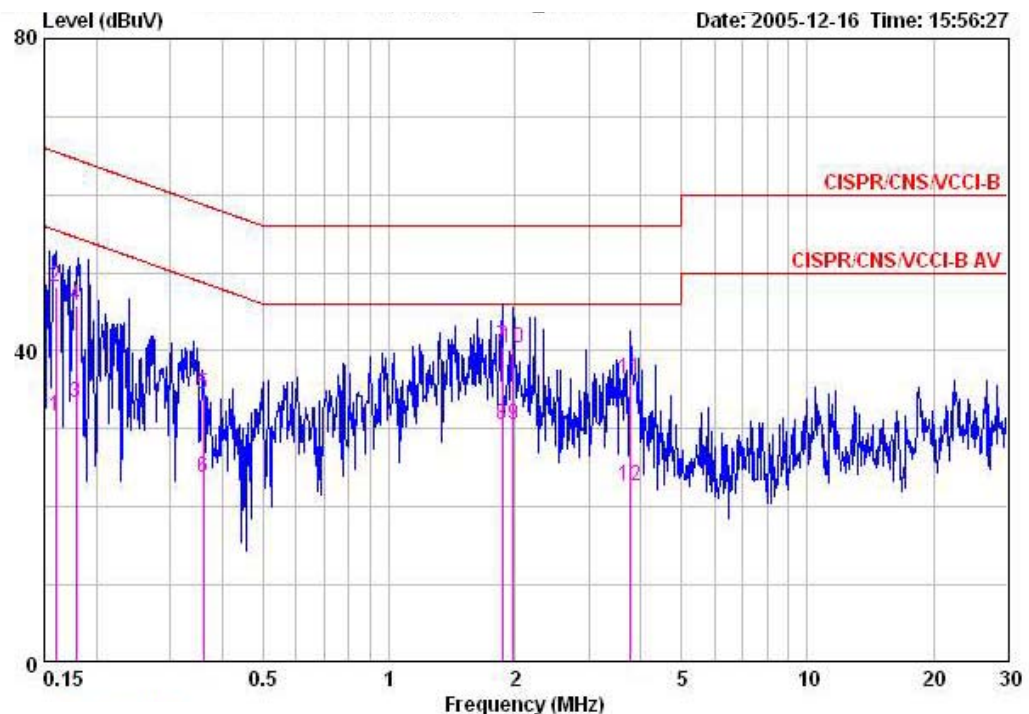

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15985	31.53	-23.94	55.47	29.23	2.10	0.20	AVERAGE
2	0.15985	48.12	-17.35	65.47	45.82	2.10	0.20	QP
3	0.17835	33.37	-21.19	54.56	31.45	1.72	0.20	AVERAGE
4	0.17835	45.70	-18.86	64.56	43.78	1.72	0.20	QP
5	0.35987	34.52	-24.21	58.73	33.62	0.70	0.20	QP
6	0.35987	23.66	-25.07	48.73	22.76	0.70	0.20	AVERAGE
7	1.862	40.56	-15.44	56.00	40.09	0.30	0.17	QP
8	1.862	30.46	-15.54	46.00	29.99	0.30	0.17	AVERAGE
9	1.980	30.55	-15.45	46.00	30.05	0.30	0.20	AVERAGE
10	1.980	40.29	-15.71	56.00	39.79	0.30	0.20	QP
11	3.779	36.38	-19.62	56.00	35.72	0.36	0.30	QP
12	3.779	22.74	-23.26	46.00	22.08	0.36	0.30	AVERAGE

Temperature	20	Humidity	64%
Test Engineer	Stan Peng	Phase	Neutral
Configuration	Normal Use		

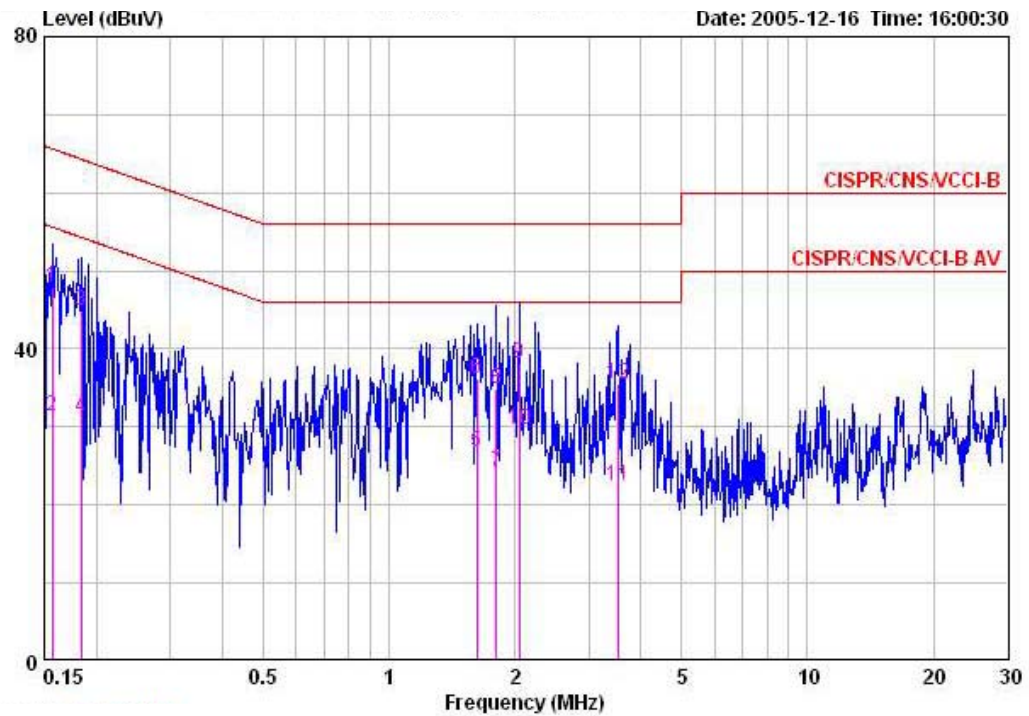

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15650	47.88	-17.77	65.65	45.78	1.90	0.20	QP
2	0.15650	31.49	-24.16	55.65	29.39	1.90	0.20	AVERAGE
3	0.18346	44.99	-19.34	64.33	43.47	1.32	0.20	QP
4	0.18346	31.13	-23.20	54.33	29.61	1.32	0.20	AVERAGE
5	1.619	26.87	-19.13	46.00	26.47	0.27	0.13	AVERAGE
6	1.619	36.25	-19.75	56.00	35.85	0.27	0.13	QP
7	1.810	24.25	-21.75	46.00	23.85	0.24	0.16	AVERAGE
8	1.810	34.78	-21.22	56.00	34.38	0.24	0.16	QP
9	2.044	38.05	-17.95	56.00	37.64	0.21	0.20	QP
10	2.044	29.71	-16.29	46.00	29.30	0.21	0.20	AVERAGE
11	3.547	22.52	-23.48	46.00	21.92	0.30	0.30	AVERAGE
12	3.547	35.61	-20.39	56.00	35.01	0.30	0.30	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Peak Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

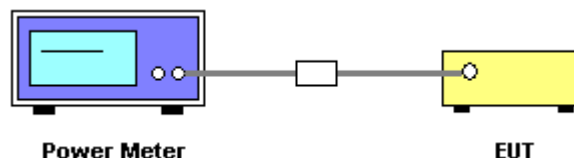

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Peak Output Power

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a/b/g

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.20	30.00	Complies
6	2437 MHz	17.60	30.00	Complies
11	2462 MHz	17.30	30.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.20	30.00	Complies
6	2437 MHz	22.80	30.00	Complies
11	2462 MHz	21.00	30.00	Complies

Configuration IEEE 802.11g Turbo

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
6	2437 MHz	22.40	30.00	Complies

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	22.20	30.00	Complies
157	5785 MHz	22.20	30.00	Complies
165	5825 MHz	22.10	30.00	Complies

Configuration IEEE 802.11a Turbo

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
152	5760 MHz	22.40	30.00	Complies
160	5800 MHz	22.40	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

4.3.4. Test Setup Layout

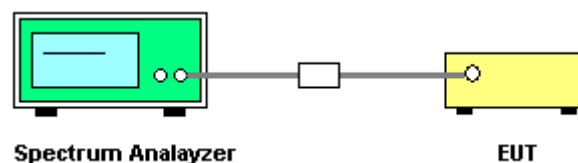

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a/b/g

Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-9.76	8.00	Complies
6	2437 MHz	-9.03	8.00	Complies
11	2462 MHz	-9.34	8.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-12.11	8.00	Complies
6	2437 MHz	-9.02	8.00	Complies
11	2462 MHz	-10.57	8.00	Complies

Configuration IEEE 802.11g Turbo

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
6	2437 MHz	-11.39	8.00	Complies


Configuration IEEE 802.11a

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-8.66	8.00	Complies
157	5785 MHz	-8.95	8.00	Complies
165	5825 MHz	-8.49	8.00	Complies

Configuration IEEE 802.11a Turbo


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
152	5760 MHz	-12.05	8.00	Complies
160	5800 MHz	-12.63	8.00	Complies

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz

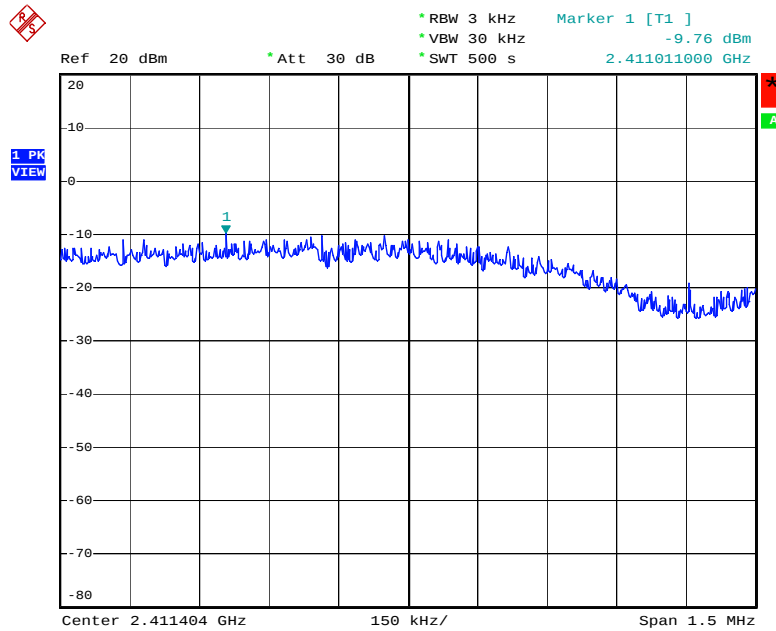


Date: 19.DEC.2005 23:24:19

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz

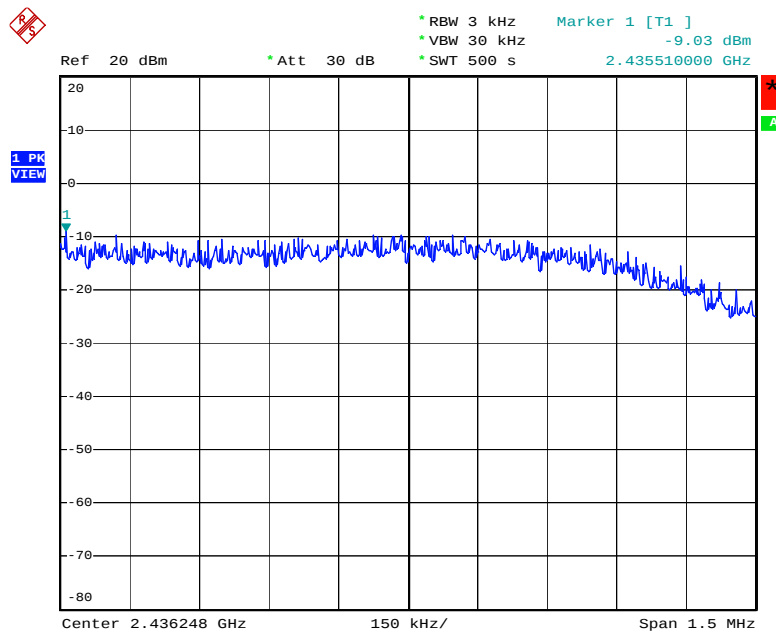


Date: 19.DEC.2005 23:25:13

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

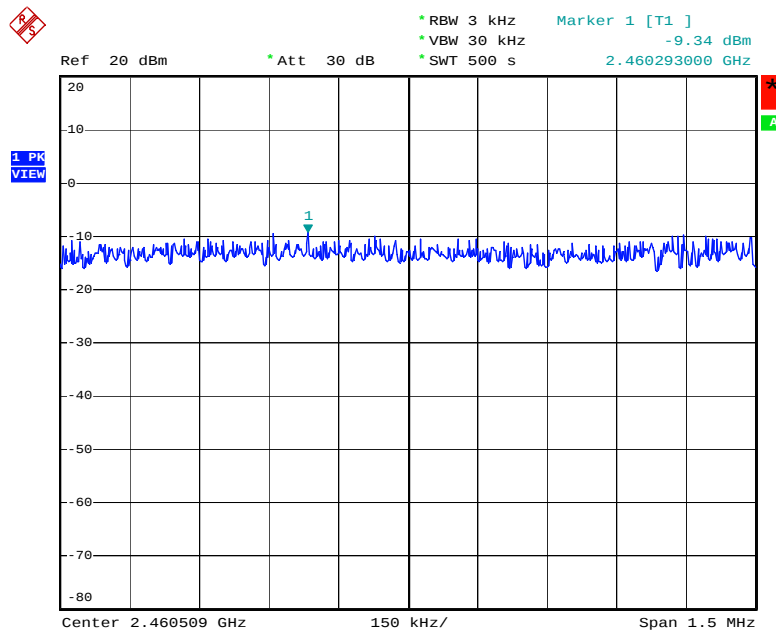


Date: 19.DEC.2005 23:27:32

Power Density Plot on Configuration IEEE 802.11g / 2412 MHz

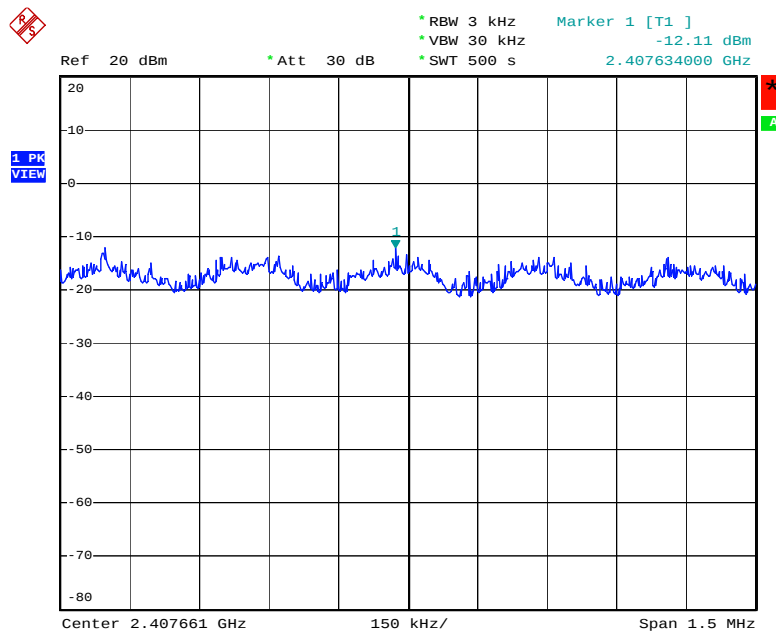


Date: 19.DEC.2005 23:33:56

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz

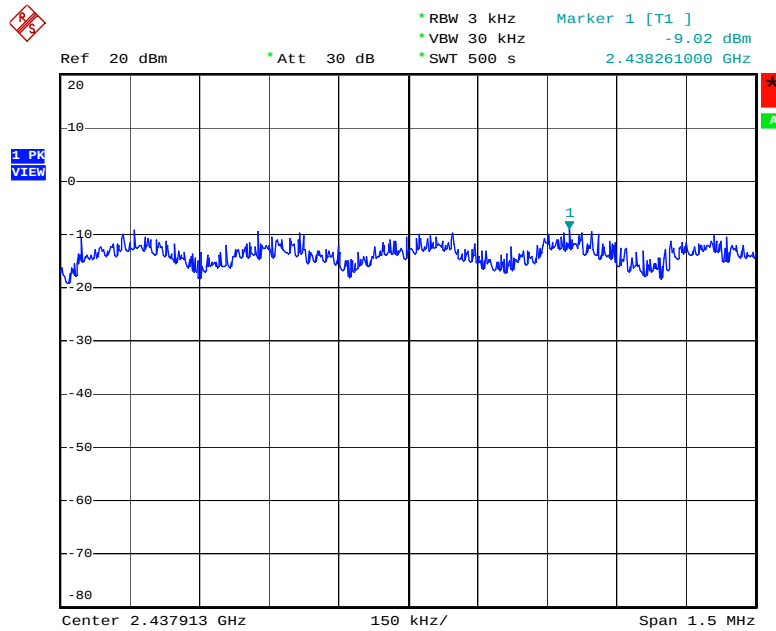


Date: 19.DEC.2005 23:33:01

Power Density Plot on Configuration IEEE 802.11g / 2462 MHz

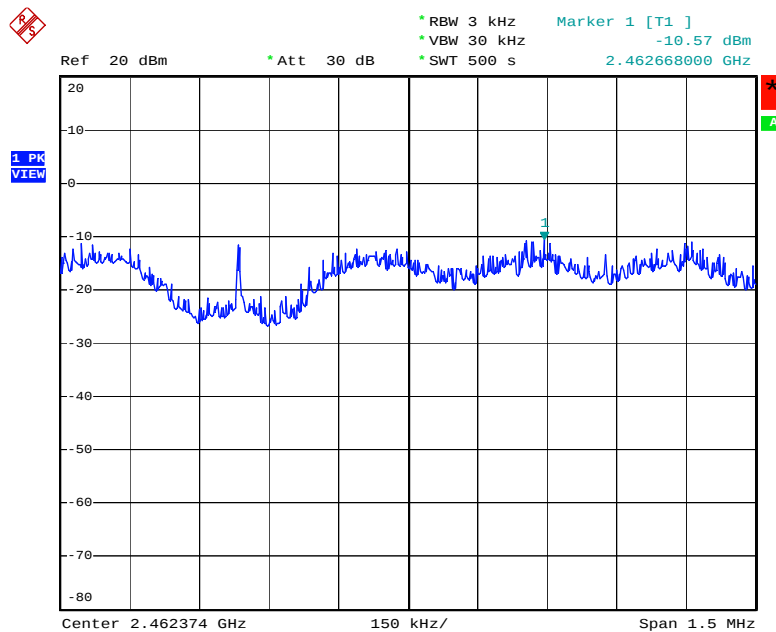


Date: 19.DEC.2005 23:30:43

Power Density Plot on Configuration IEEE 802.11g Turbo / 2437 MHz

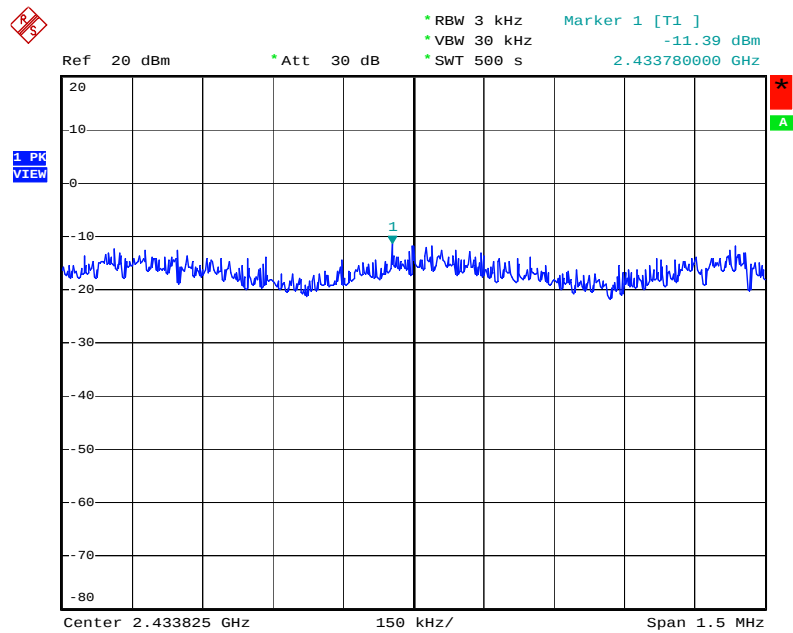


Date: 19.DEC.2005 23:45:17

Power Density Plot on Configuration IEEE 802.11a / 5745 MHz

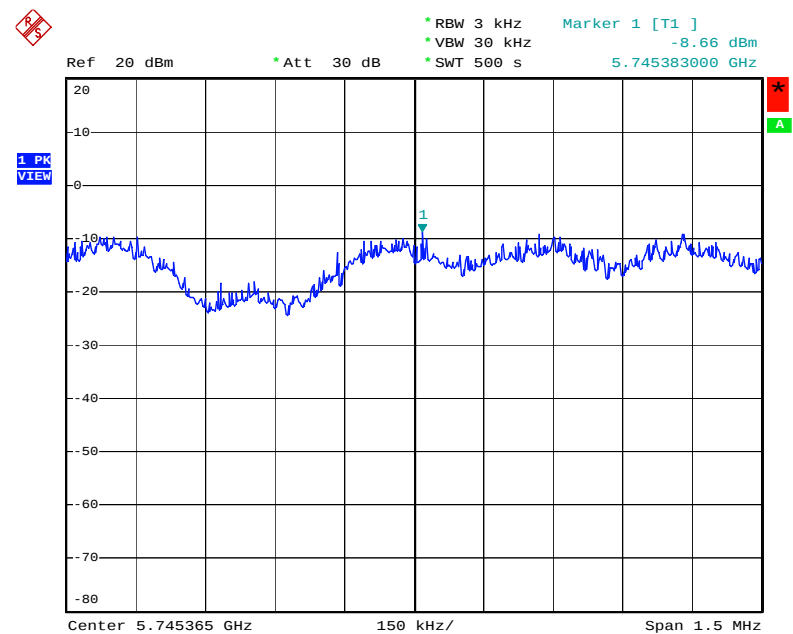


Date: 20.DEC.2005 22:32:02

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz

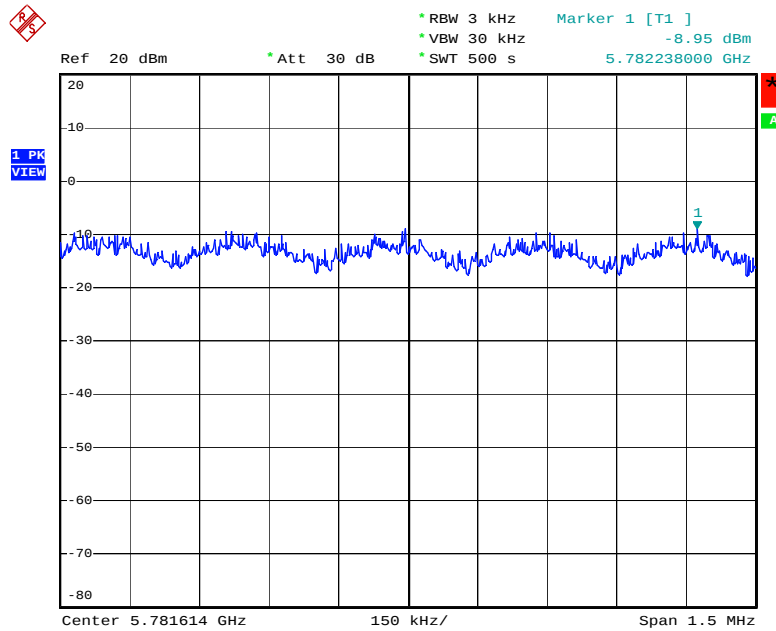


Date: 20.DEC.2005 22:34:42

Power Density Plot on Configuration IEEE 802.11a / 5825 MHz

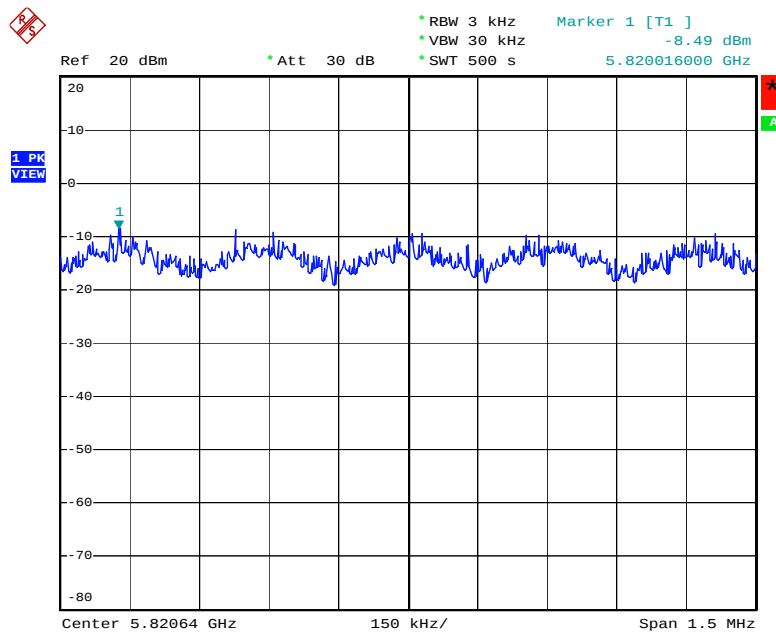


Date: 20.DEC.2005 22:38:57

Power Density Plot on Configuration IEEE 802.11a Turbo / 5760 MHz

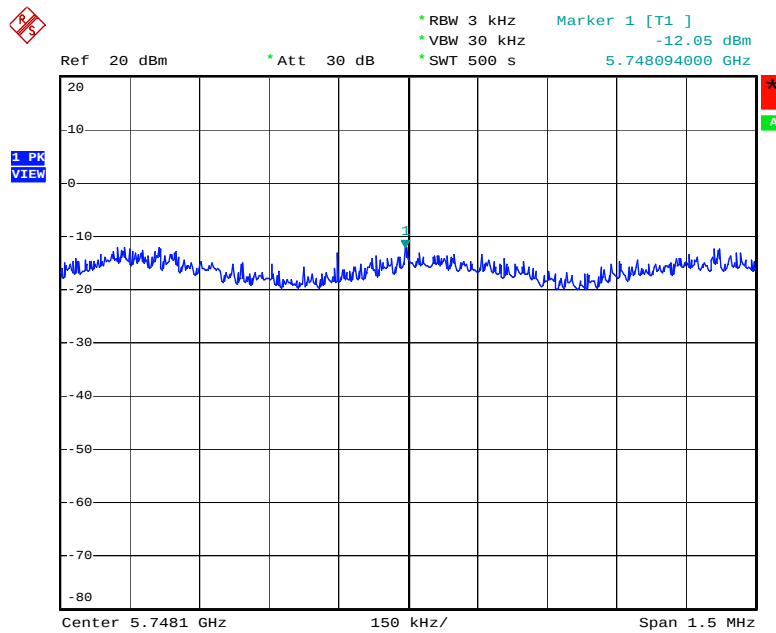

Date: 21.DEC.2005 09:41:49

Power Density Plot on Configuration IEEE 802.11a Turbo / 5800 MHz

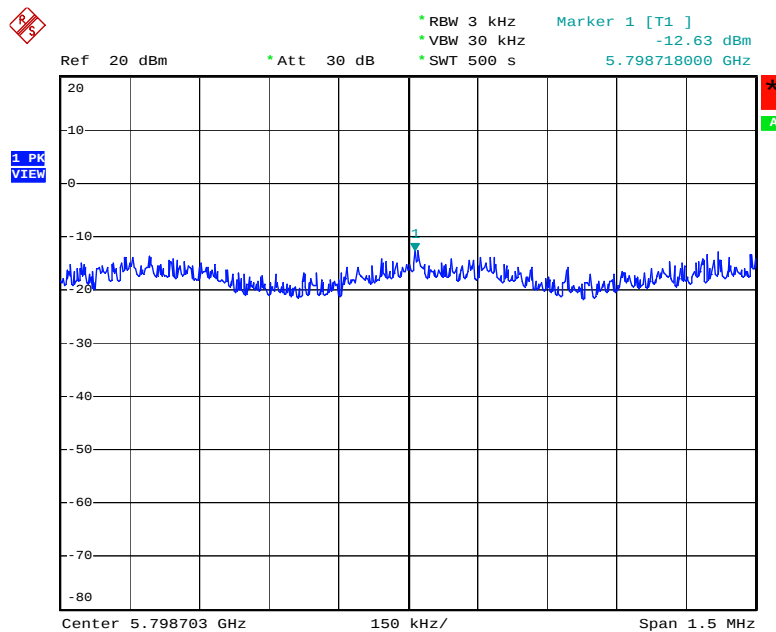

Date: 21.DEC.2005 09:47:10

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

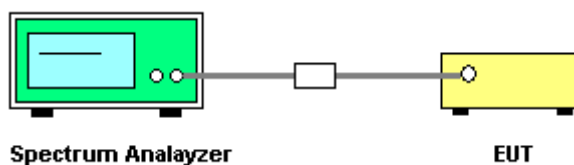

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11b/g

Configuration IEEE 802.11b

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	11.08	15.64	500	Complies
6	2437 MHz	11.12	15.64	500	Complies
11	2462 MHz	12.08	15.60	500	Complies

Configuration IEEE 802.11g

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.36	16.52	500	Complies
6	2437 MHz	16.36	16.56	500	Complies
11	2462 MHz	16.36	16.52	500	Complies

Configuration IEEE 802.11g Turbo

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
6	2437 MHz	32.56	32.96	500	Complies


Configuration IEEE 802.11a

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.36	16.56	500	Complies
157	5785 MHz	16.36	16.52	500	Complies
165	5825 MHz	16.36	16.52	500	Complies

Configuration IEEE 802.11a Turbo


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
152	5760 MHz	32.64	32.88	500	Complies
160	5800 MHz	32.56	32.88	500	Complies

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

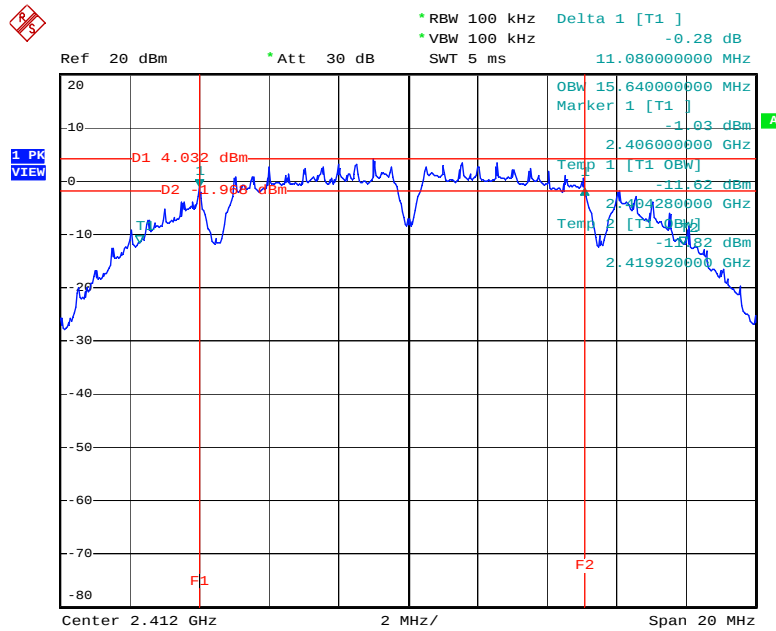


Date: 19.DEC.2005 23:23:54

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

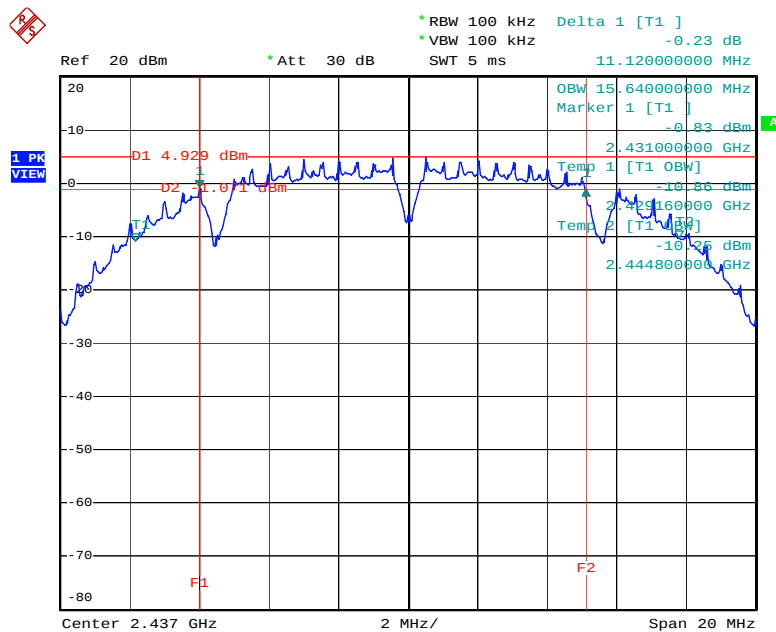


Date: 19.DEC.2005 23:24:57

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

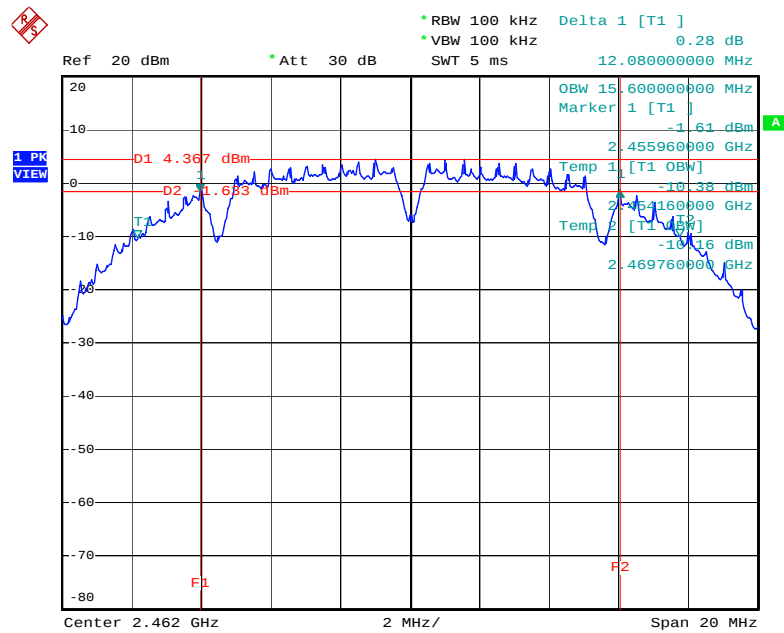


Date: 19.DEC.2005 23:27:17

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

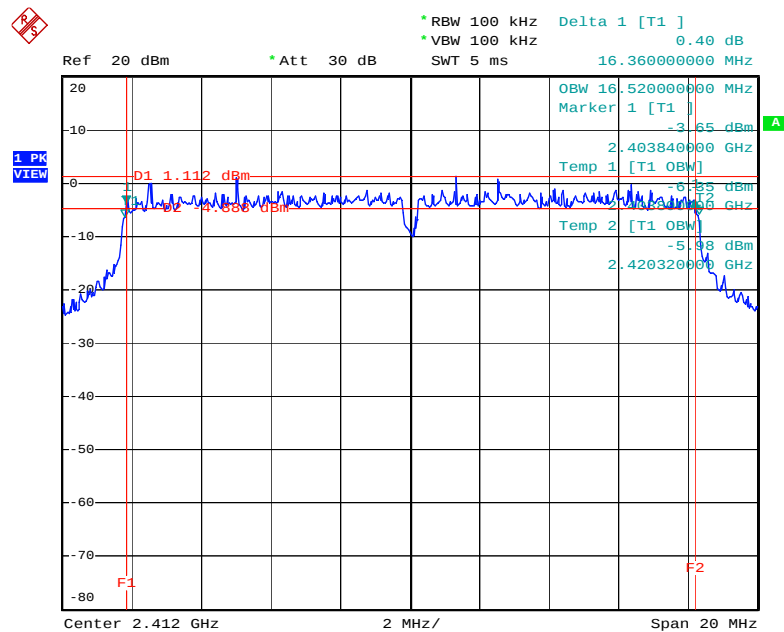


Date: 19.DEC.2005 23:33:31

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

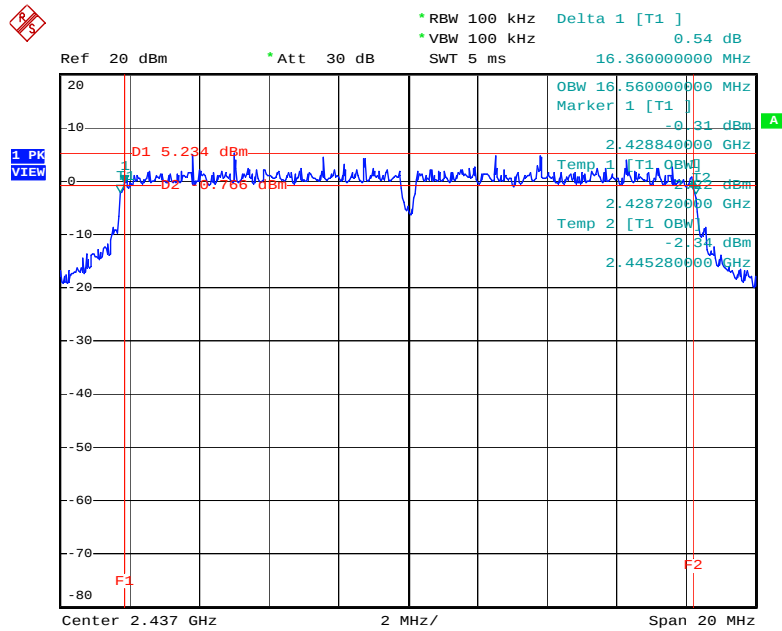


Date: 19.DEC.2005 23:32:45

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

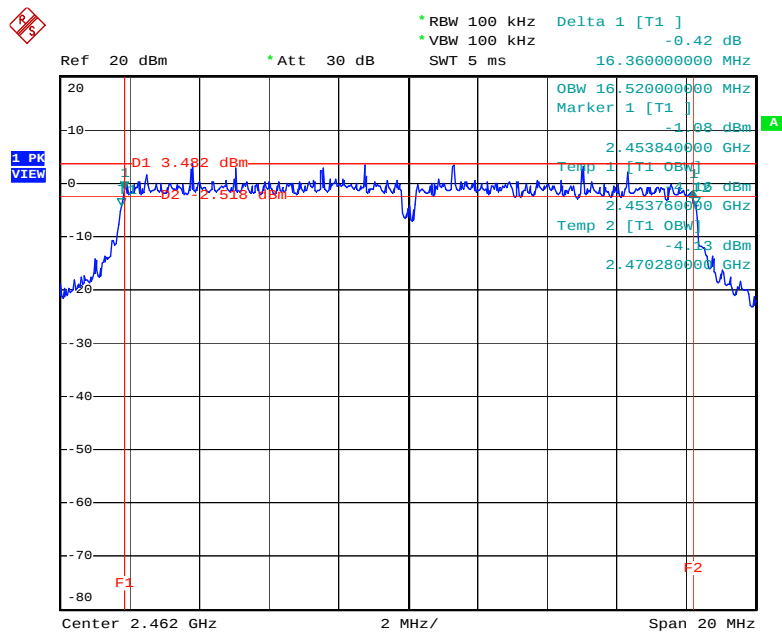


Date: 19.DEC.2005 23:30:29

6 dB Bandwidth Plot on Configuration IEEE 802.11g Turbo / 2437 MHz

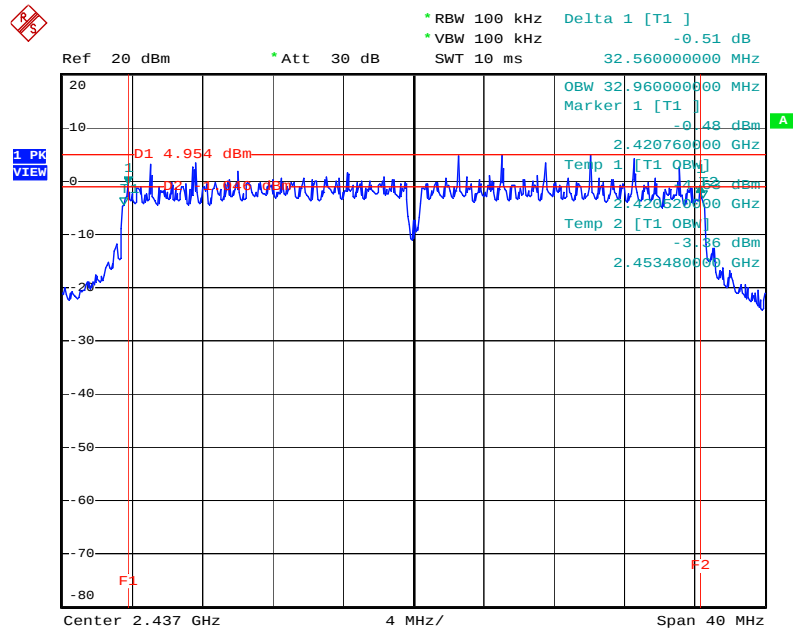


Date: 19.DEC.2005 23:45:02

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5745 MHz

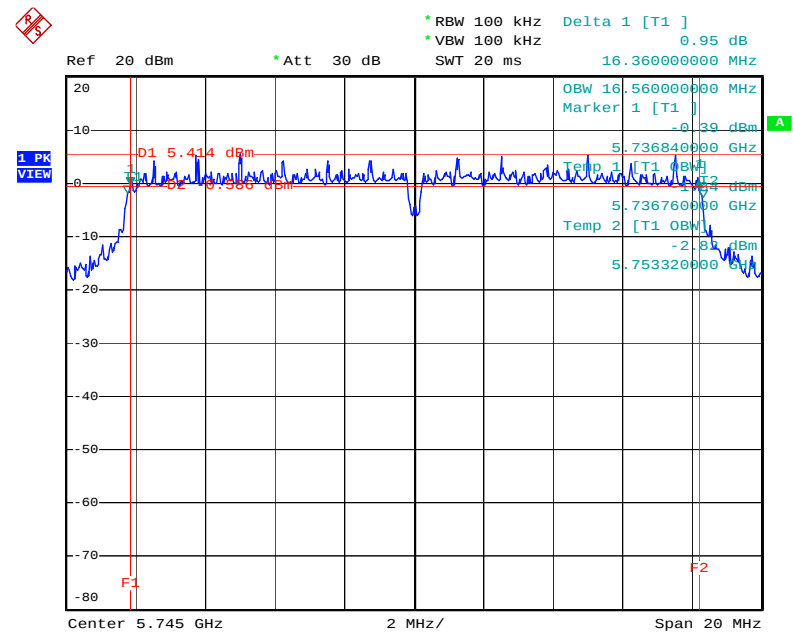


Date: 20.DEC.2005 22:31:37

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5785 MHz

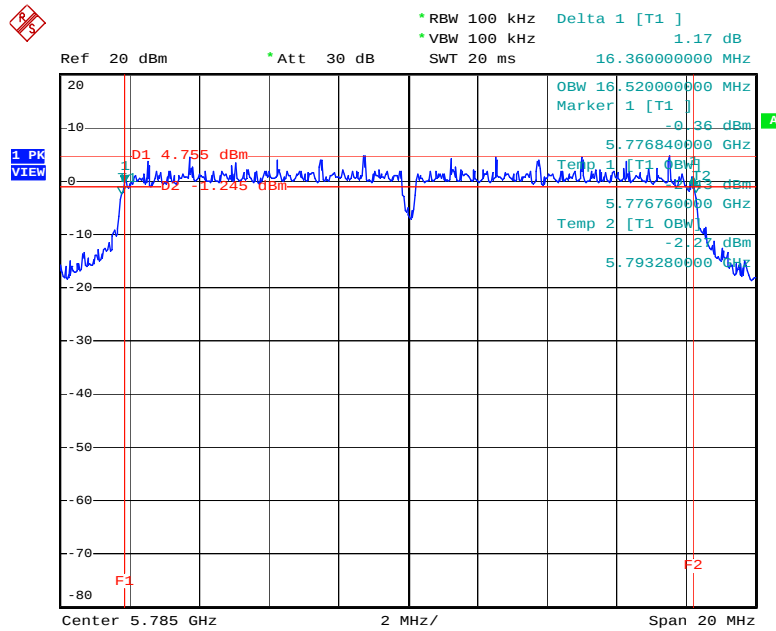


Date: 20.DEC.2005 22:34:18

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5825 MHz

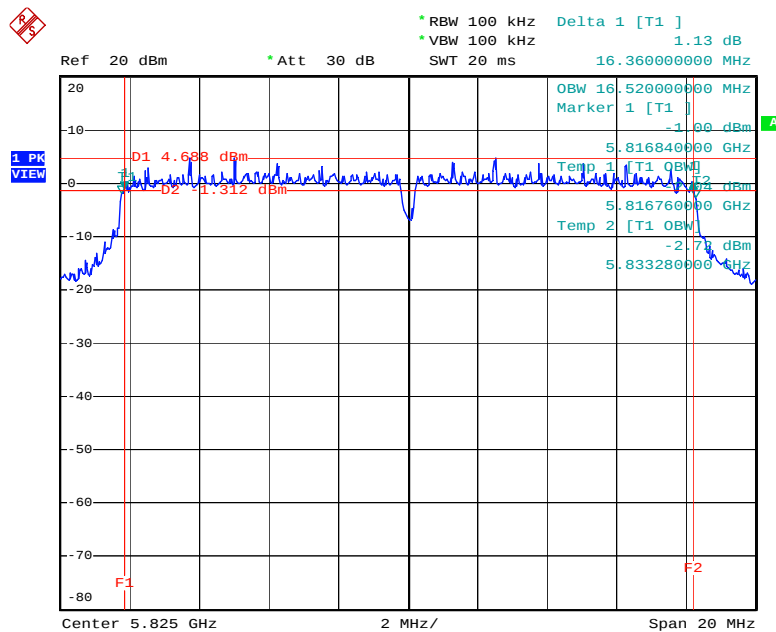


Date: 20.DEC.2005 22:38:43

6 dB Bandwidth Plot on Configuration IEEE 802.11a Turbo / 5760 MHz

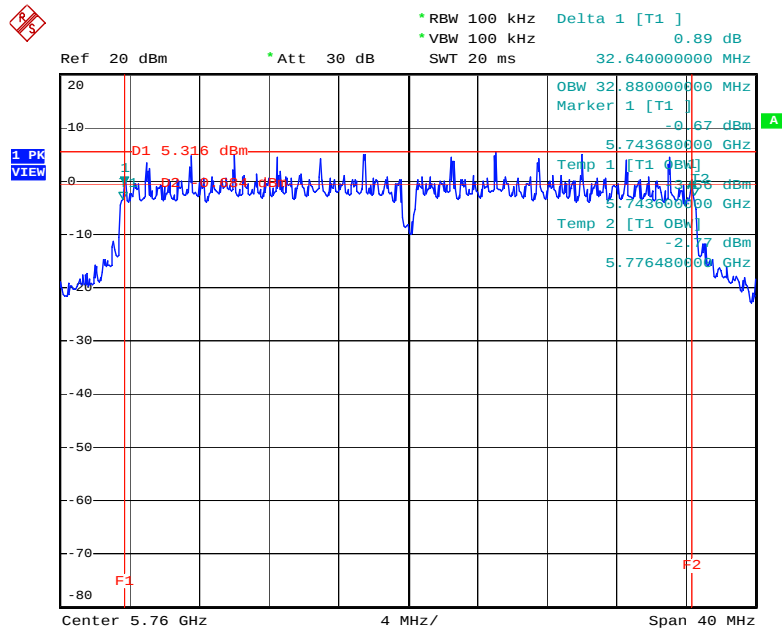

Date: 21.DEC.2005 09:41:25

6 dB Bandwidth Plot on Configuration IEEE 802.11a Turbo / 5800 MHz

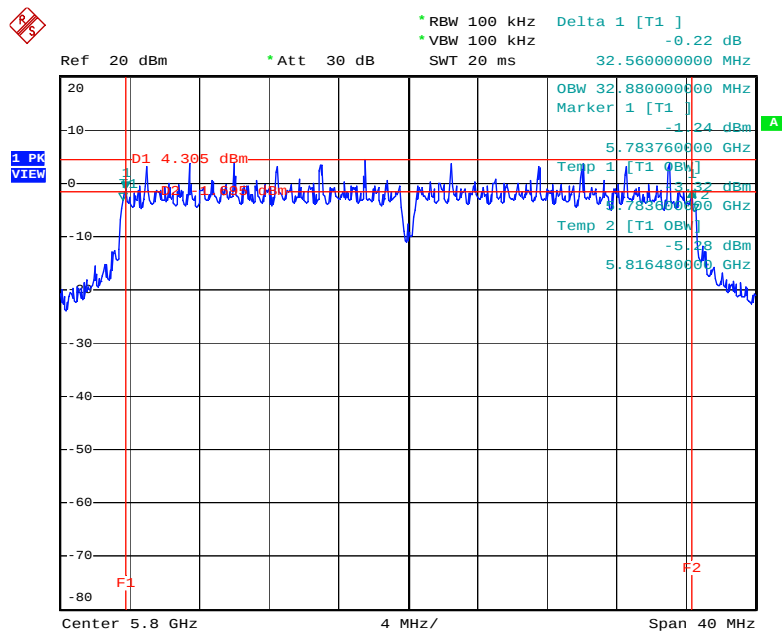

Date: 21.DEC.2005 09:46:55

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(KHz)	300
0.490 ~ 1.705	24000/F(KHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz ~ 150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz ~ 30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz ~ 1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

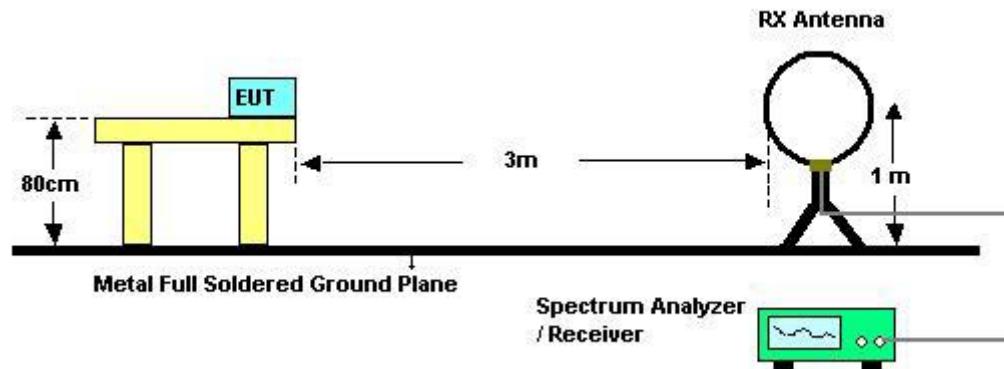

For radiated emissions above 30MHz

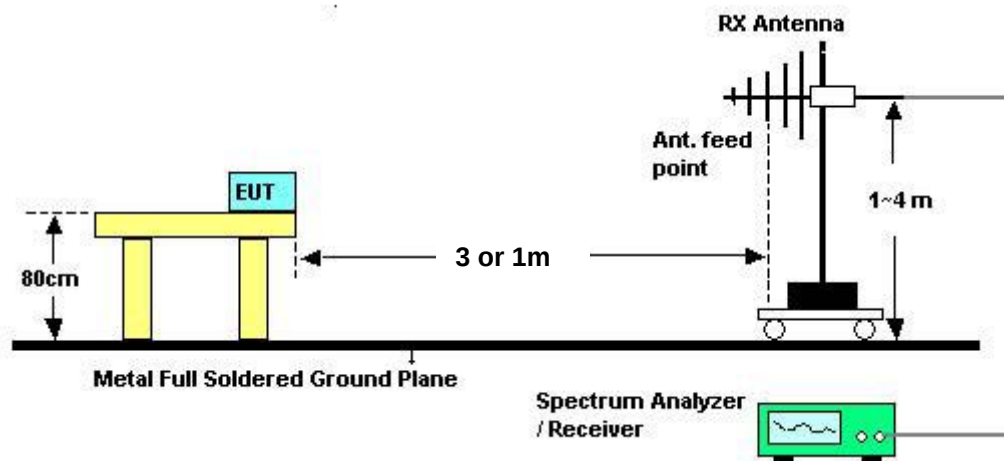

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 6

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 6

Horizontal

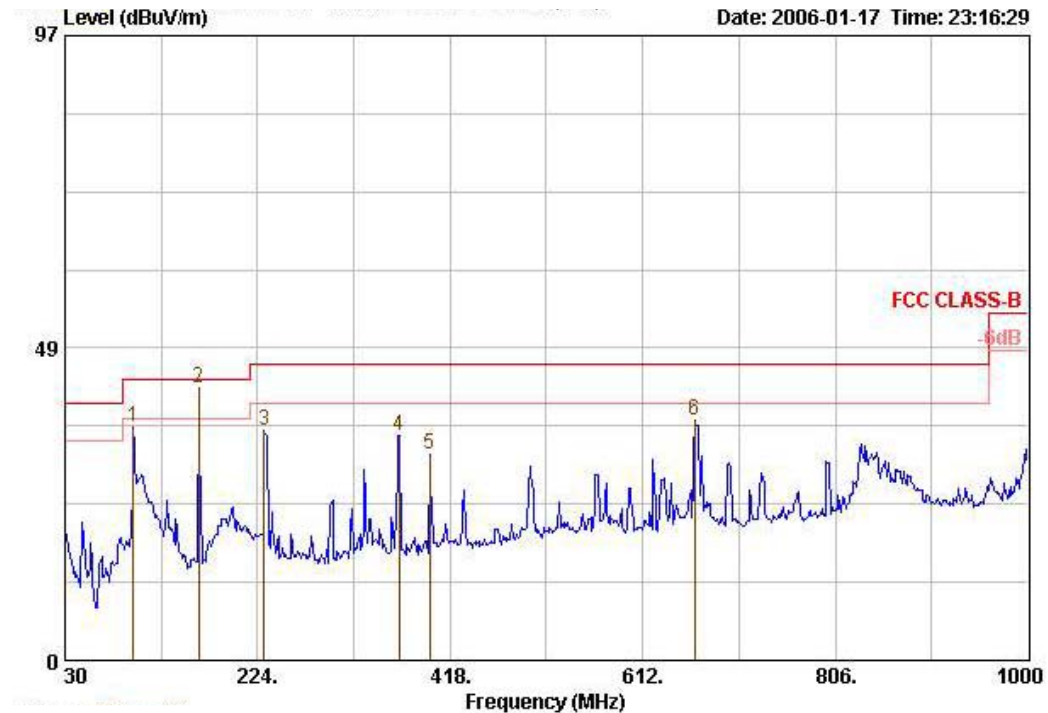

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	98.870	36.15	-7.35	43.50	10.35	0.80	30.10	55.10 Peak	---	---
2 @	165.100	42.27	-1.23	43.50	9.35	1.02	30.19	62.08 QP	---	---
3	230.790	35.55	-10.45	46.00	9.84	1.20	30.07	54.58 Peak	---	---
4	366.590	34.96	-11.04	46.00	14.83	1.51	30.55	49.16 Peak	---	---
5	397.630	32.06	-13.94	46.00	15.80	1.59	30.37	45.04 Peak	---	---
6	664.380	37.37	-8.63	46.00	18.90	2.05	30.35	46.76 Peak	---	---

Vertical

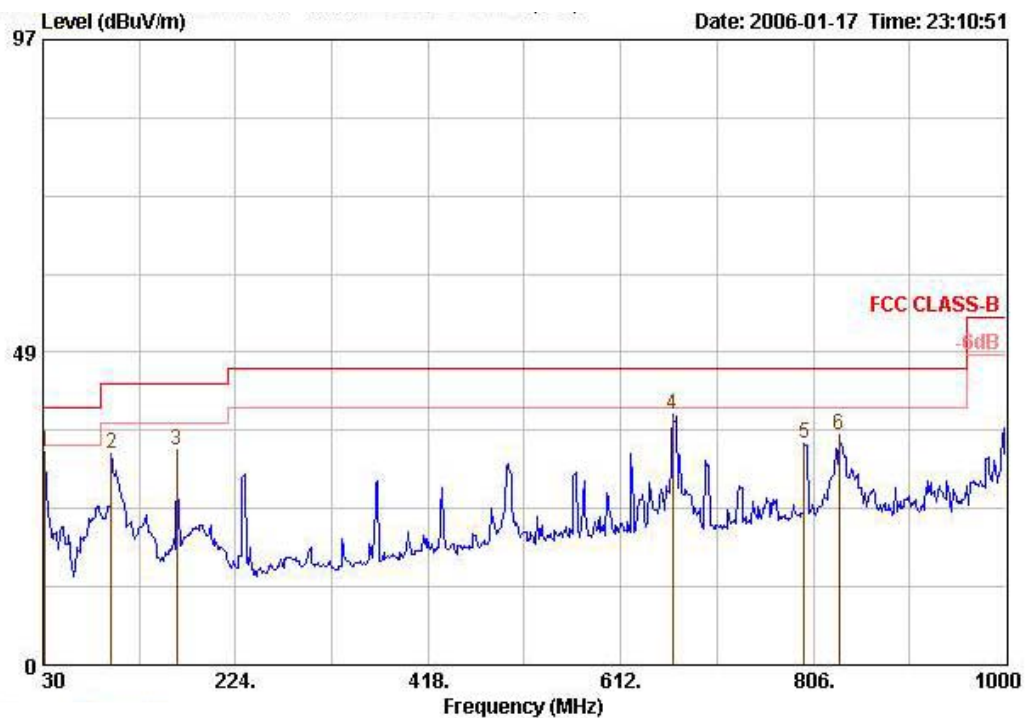

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table
	MHz	dBuV/m	Limit	Line	Factor	Loss	Factor	Level	Remark	Pos	Pos
			dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	31.940	32.94	-7.06	40.00	17.00	0.48	29.79	45.25	Peak	---	---
2	98.870	32.74	-10.76	43.50	10.35	0.80	30.10	51.69	Peak	---	---
3	164.830	33.27	-10.23	43.50	9.35	1.02	30.19	53.08	Peak	---	---
4	664.380	38.91	-7.09	46.00	18.90	2.05	30.35	48.30	Peak	---	---
5	797.270	34.39	-11.61	46.00	19.96	2.25	30.13	42.30	Peak	---	---
6	832.190	35.76	-10.24	46.00	20.30	2.32	30.01	43.16	Peak	---	---

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 157

Horizontal

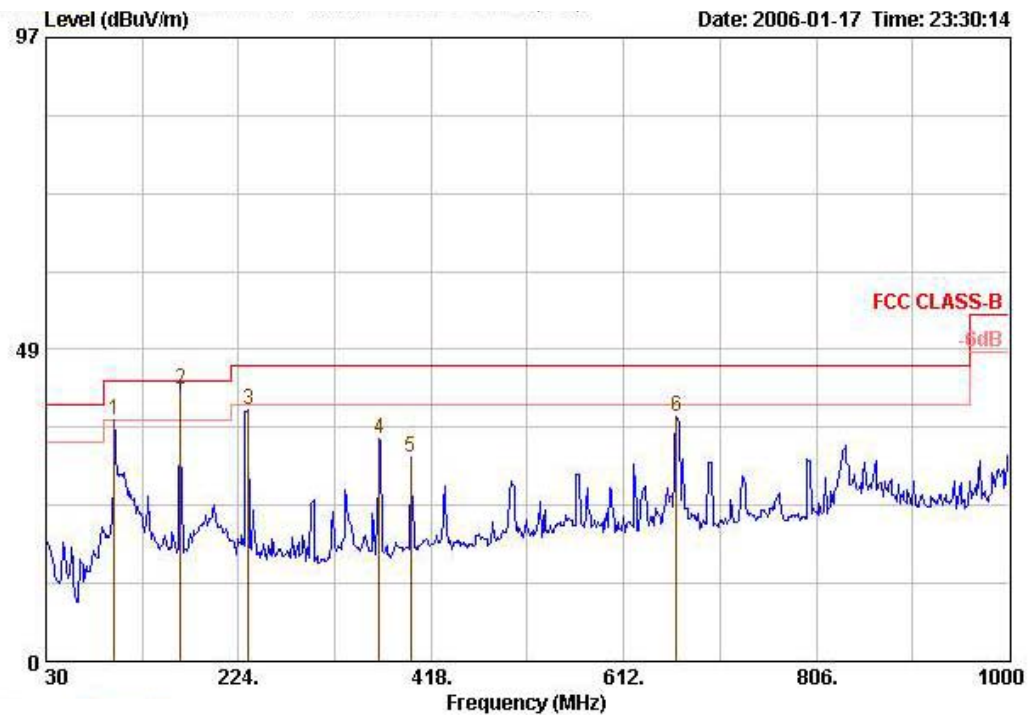

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	98.870	37.42	-6.08	43.50	10.35	0.80	30.10	56.36	Peak	---	---
2 @	165.410	42.26	-1.24	43.50	9.35	1.02	30.19	62.08	QP	---	---
3	233.700	39.05	-6.95	46.00	10.26	1.21	30.07	57.65	Peak	---	---
4	365.620	34.53	-11.47	46.00	14.83	1.51	30.55	48.75	Peak	---	---
5	397.630	31.72	-14.28	46.00	15.80	1.59	30.37	44.70	Peak	---	---
6	665.350	38.15	-7.85	46.00	18.91	2.06	30.35	47.54	Peak	---	---

Vertical

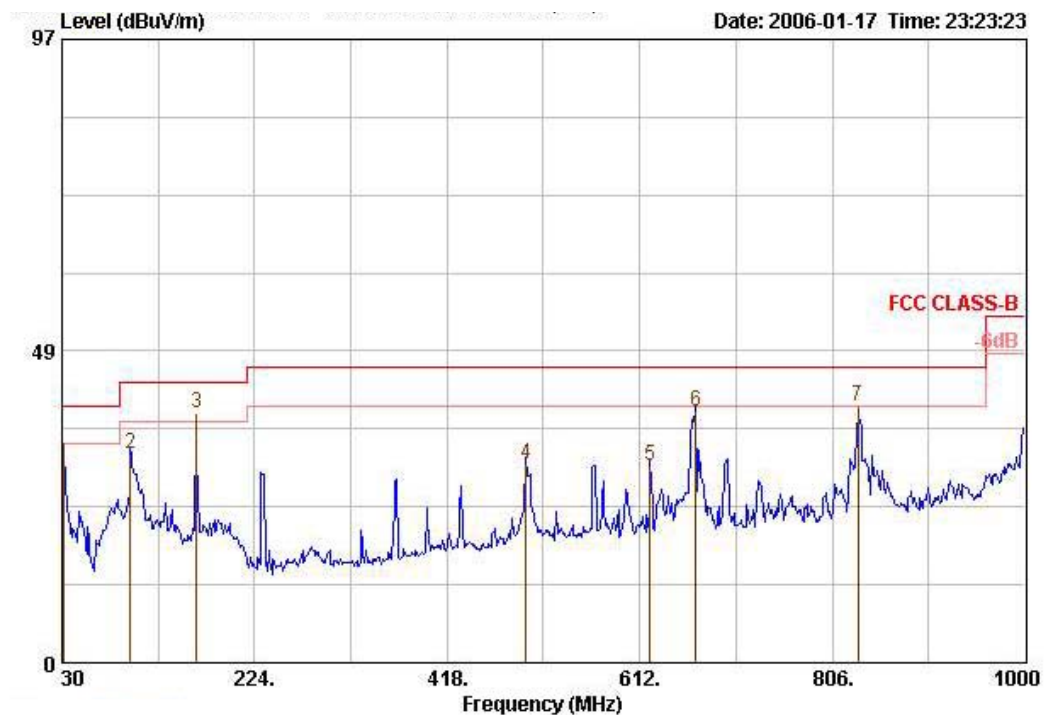

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 !	31.450	34.42	-5.58	40.00	17.00	0.48	29.79	46.72	Peak	---	---
2	98.740	32.60	-10.90	43.50	10.35	0.80	30.10	51.54	Peak	---	---
3 !	165.300	38.89	-4.61	43.50	9.35	1.02	30.19	58.70	Peak	---	---
4	497.400	31.04	-14.96	46.00	17.34	1.77	30.54	42.47	Peak	---	---
5	622.670	30.68	-15.32	46.00	18.73	1.97	30.63	40.62	Peak	---	---
6	668.260	39.24	-6.76	46.00	18.91	2.06	30.36	48.62	Peak	---	---
7	832.010	39.90	-6.10	46.00	20.30	2.32	30.01	47.29	Peak	---	---

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11b Channel 1

Horizontal

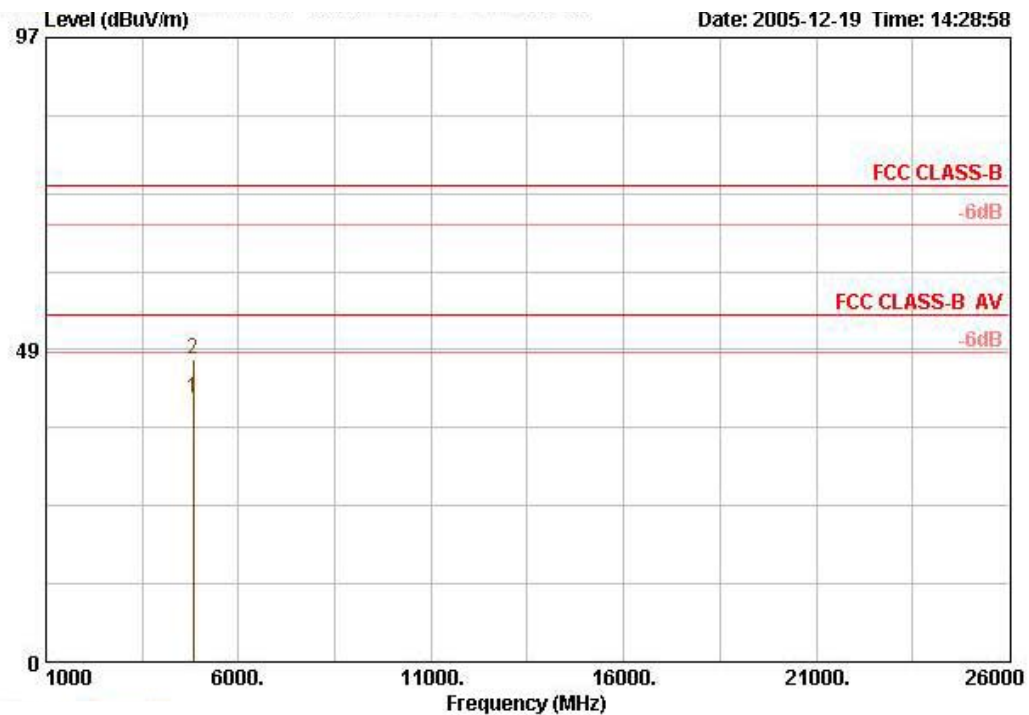

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4824.050	40.90	-13.10	54.00	33.22	4.68	35.10	38.10	AVERAGE	145	92
2	4824.050	47.09	-26.91	74.00	33.22	4.68	35.10	44.30	PEAK	145	92


Vertical

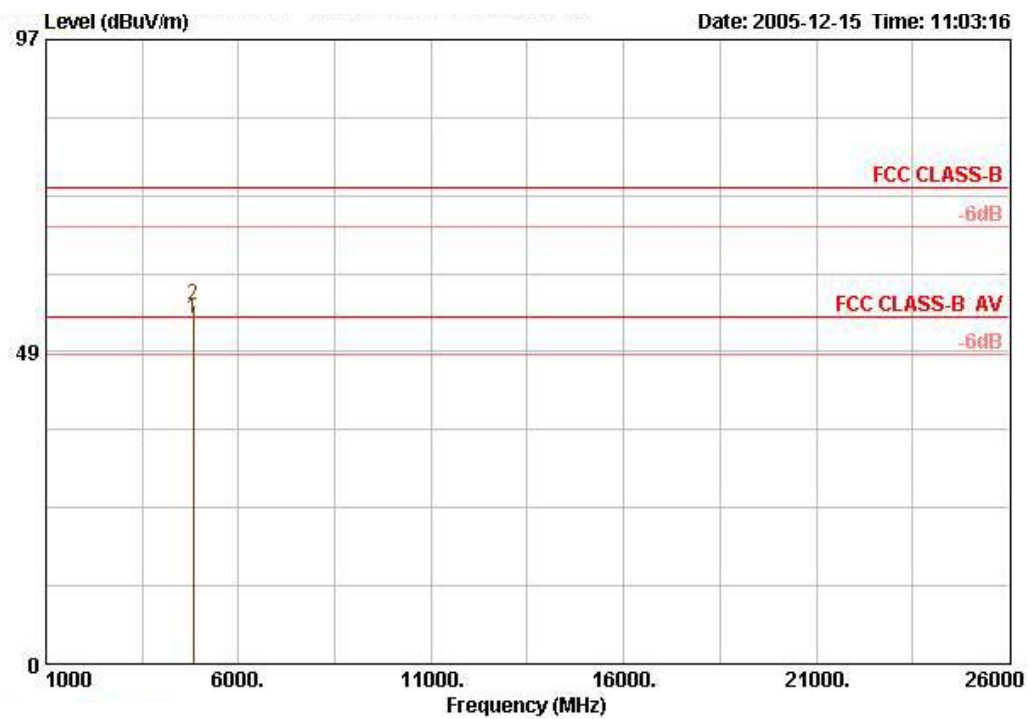

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	4824.000	53.68	-0.32	54.00	33.22	4.68	35.10	50.89	AVERAGE	100	269
2	4824.000	55.67	-18.33	74.00	33.22	4.68	35.10	52.87	PEAK	100	269


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11b Channel 6

Horizontal

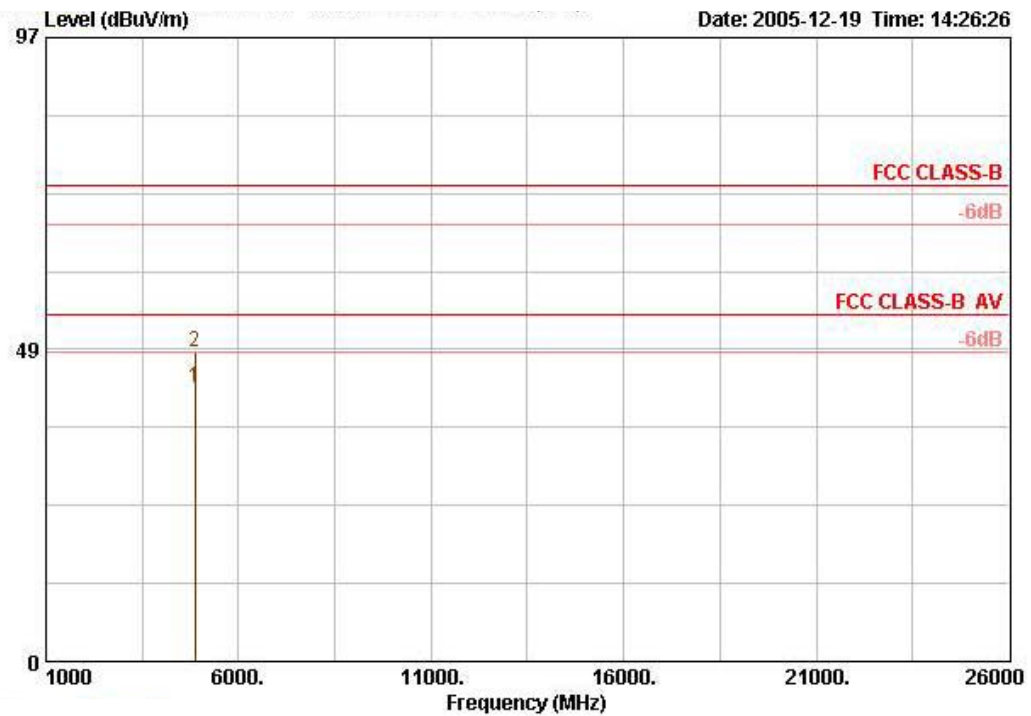

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4874.120	42.50	-11.50	54.00	33.33	4.69	35.10	39.58	AVERAGE	147	72
2	4874.120	48.22	-25.78	74.00	33.33	4.69	35.10	45.29	PEAK	147	72


Vertical

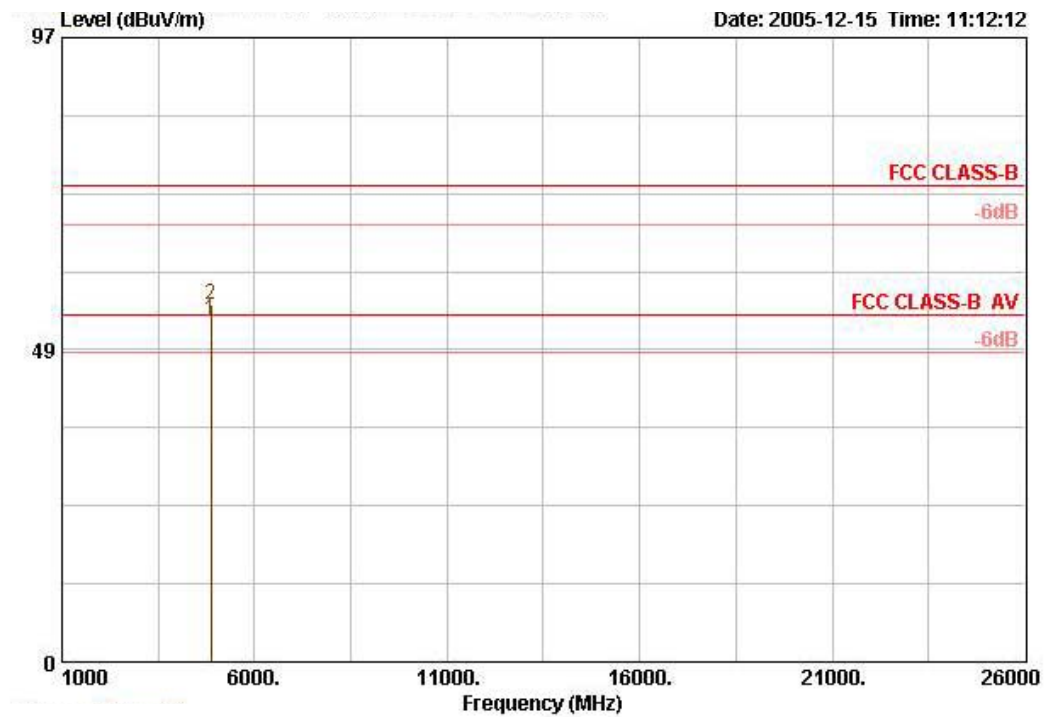

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	4874.030	53.23	-0.77	54.00	33.33	4.69	35.10	50.31	AVERAGE	109	256
2	4874.030	55.38	-18.62	74.00	33.33	4.69	35.10	52.45	PEAK	109	256


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11b Channel 11

Horizontal

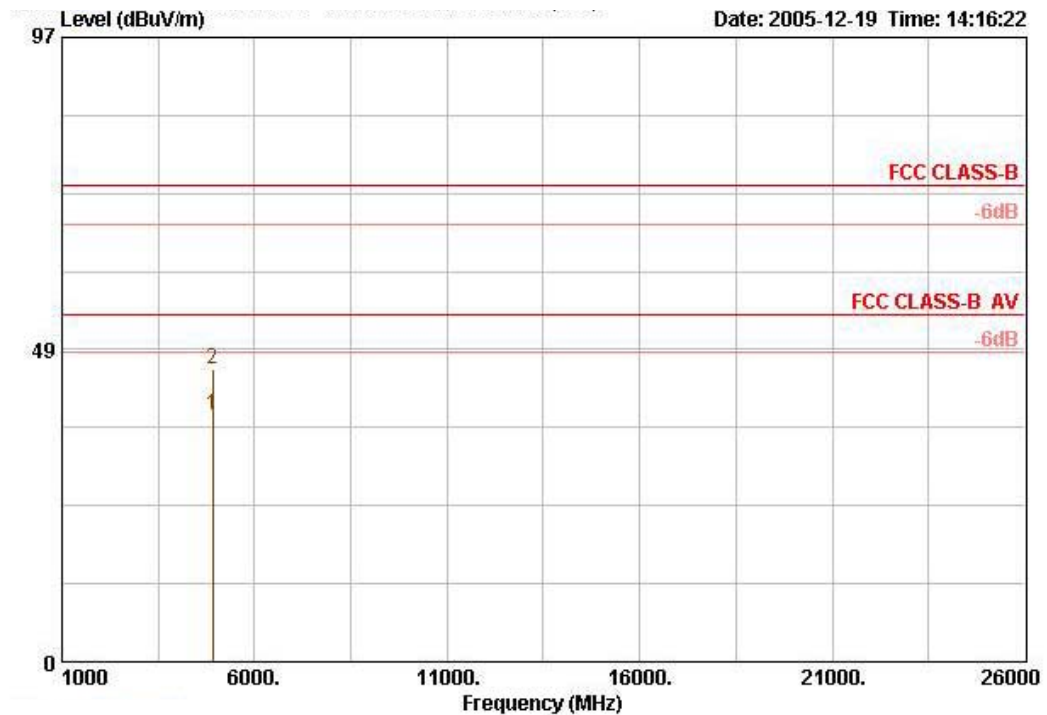

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4924.040	38.35	-15.65	54.00	33.45	4.73	35.10	35.28 AVERAGE	100	85
2	4924.040	45.38	-28.62	74.00	33.45	4.73	35.10	42.30 PEAK	100	85


Vertical

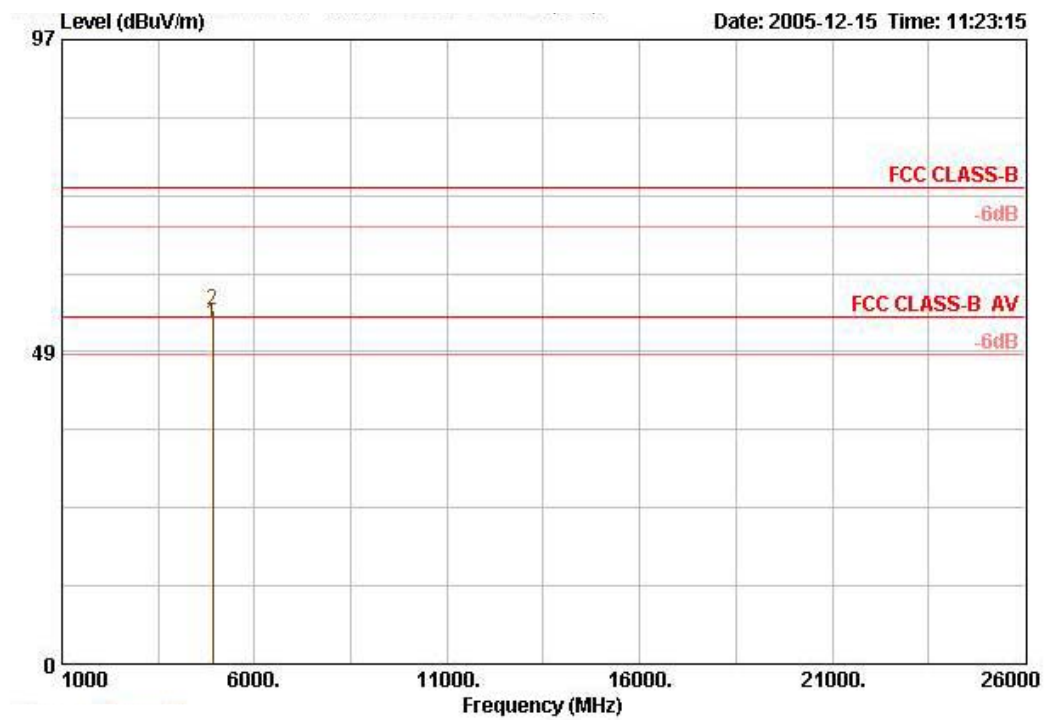

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	4924.030	52.98	-1.02	54.00	33.45	4.73	35.10	49.90	AVERAGE	110	89
2	4924.030	54.86	-19.14	74.00	33.45	4.73	35.10	51.78	PEAK	110	89


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 1

Horizontal

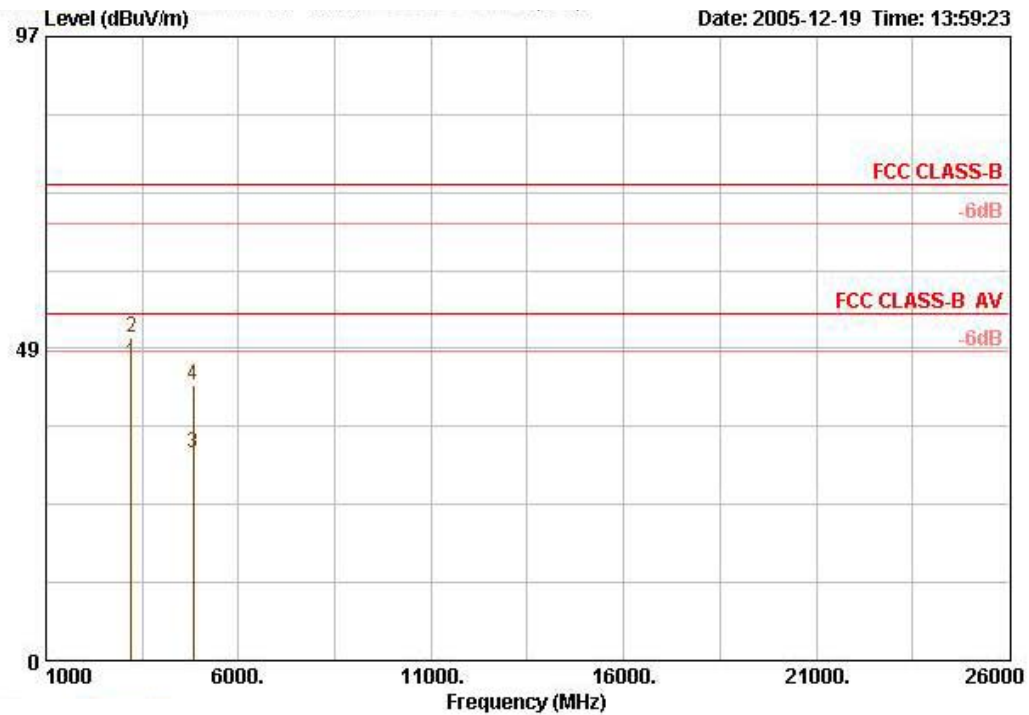

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	3216.060	46.35	-7.65	54.00	30.66	3.05	35.20	47.85	AVERAGE	128	7
2	3216.060	50.10	-23.90	74.00	30.66	3.05	35.20	51.60	PEAK	128	7
3	4823.460	32.36	-21.64	54.00	33.22	4.68	35.10	29.56	AVERAGE	141	86
4	4823.460	42.89	-31.11	74.00	33.22	4.68	35.10	40.10	PEAK	141	86


Vertical

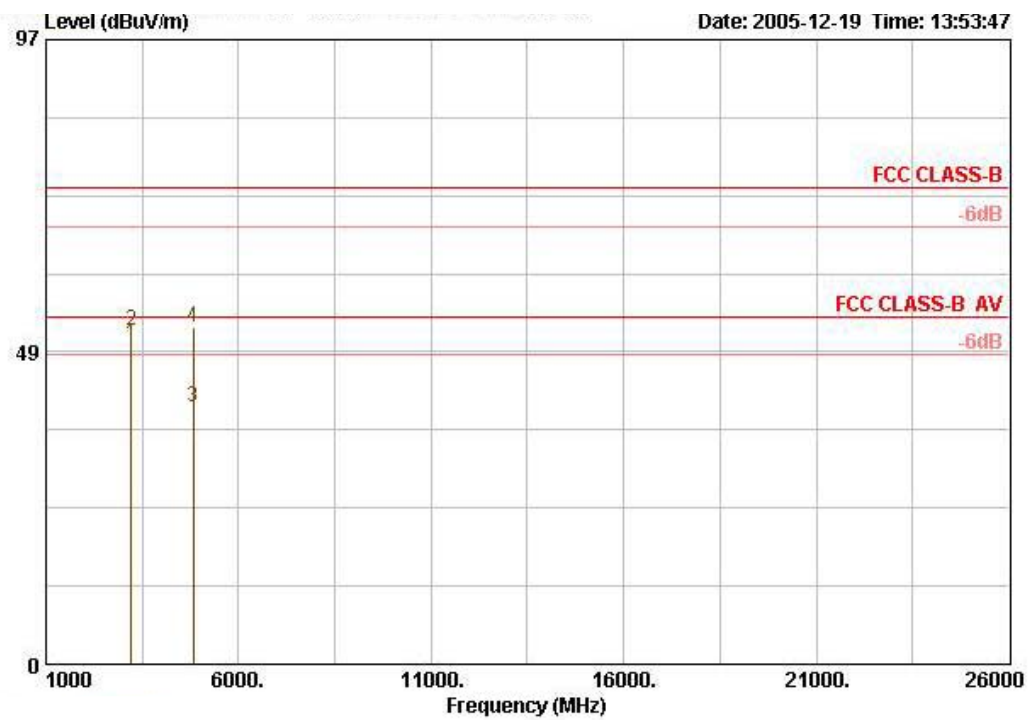

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 !	3216.000	49.74	-4.26	54.00	30.66	3.05	35.20	51.24	AVERAGE	101	108
2	3216.000	51.69	-22.31	74.00	30.66	3.05	35.20	53.19	PEAK	101	108
3	4823.340	39.97	-14.03	54.00	33.22	4.68	35.10	37.17	AVERAGE	100	90
4	4823.340	52.21	-21.79	74.00	33.22	4.68	35.10	49.41	PEAK	100	90


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 6

Horizontal

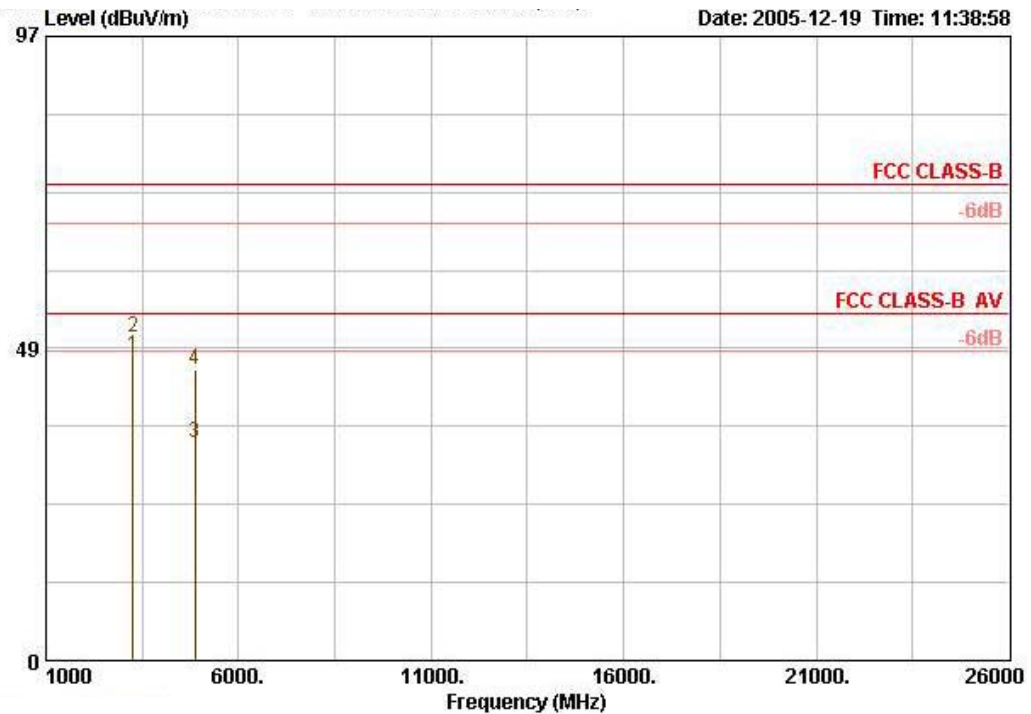

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	3249.360	47.42	-6.58	54.00	30.73	3.08	35.20	48.81	AVERAGE	128	7
2	3249.360	50.24	-23.76	74.00	30.73	3.08	35.20	51.63	PEAK	128	7
3	4875.360	33.73	-20.27	54.00	33.33	4.69	35.10	30.81	AVERAGE	100	84
4	4875.360	45.21	-28.79	74.00	33.33	4.69	35.10	42.28	PEAK	100	84


Vertical

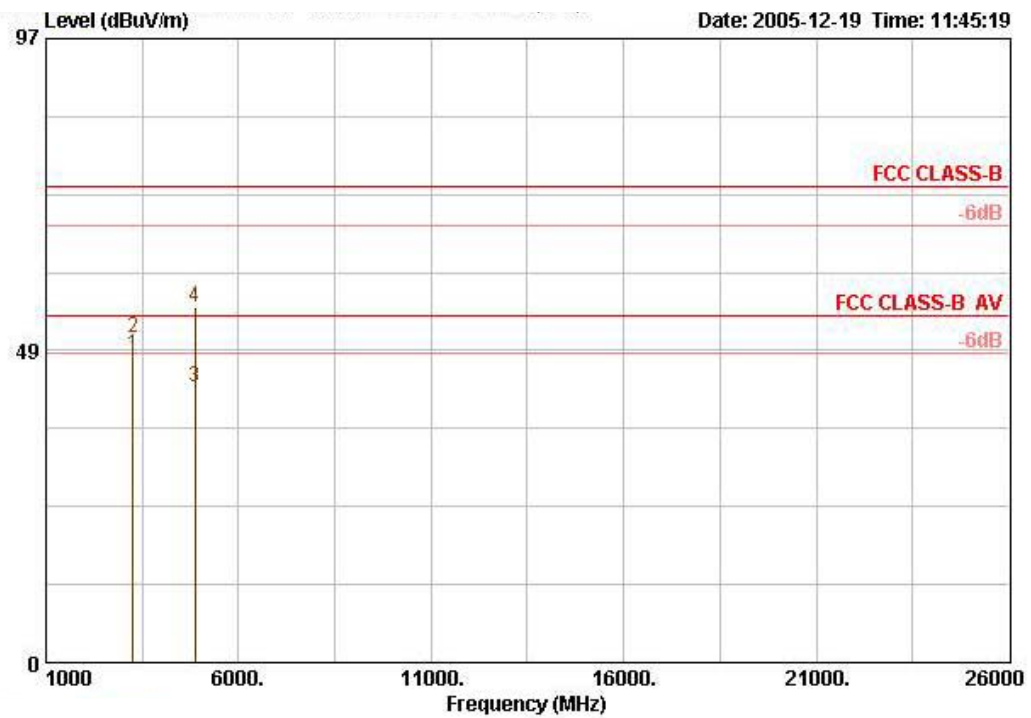

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	3249.380	47.81	-6.19	54.00	30.73	3.08	35.20	49.19	AVERAGE	102	108
2	3249.380	50.59	-23.41	74.00	30.73	3.08	35.20	51.97	PEAK	102	108
3	4873.880	42.81	-11.19	54.00	33.33	4.69	35.10	39.88	AVERAGE	100	90
4	4873.880	55.32	-18.68	74.00	33.33	4.69	35.10	52.40	PEAK	100	90


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 11

Horizontal

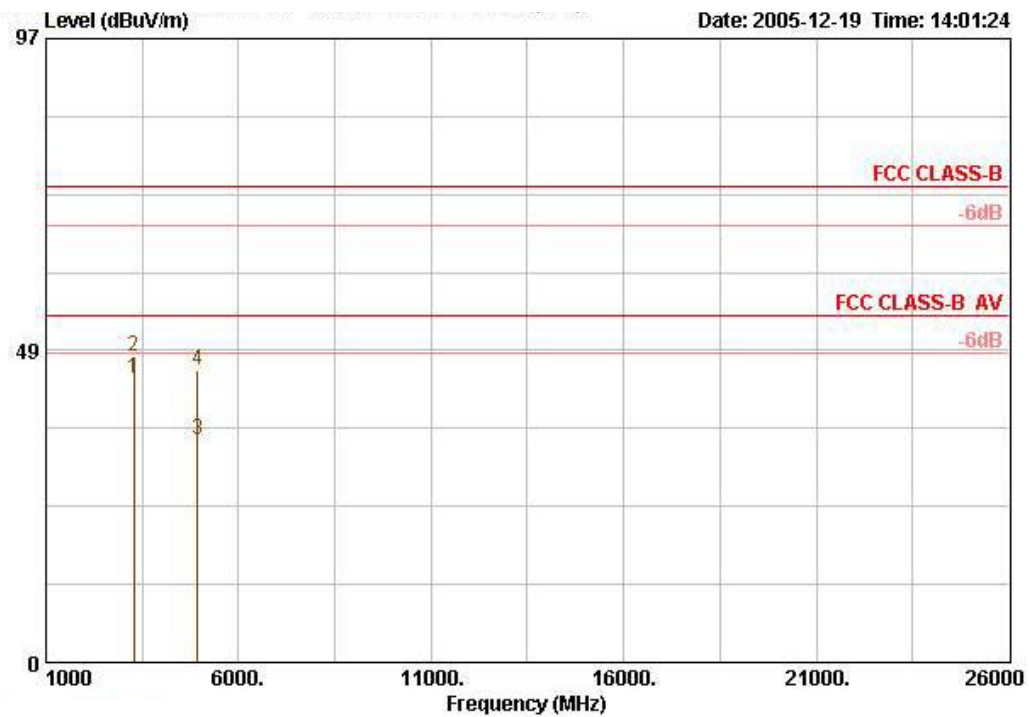

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	3282.680	44.04	-9.96	54.00	30.81	3.12	35.20	45.31	AVERAGE	128	7
2	3282.680	47.58	-26.42	74.00	30.81	3.12	35.20	48.85	PEAK	128	7
3	4926.720	34.68	-19.32	54.00	33.45	4.73	35.10	31.61	AVERAGE	141	86
4	4926.720	45.43	-28.57	74.00	33.45	4.73	35.10	42.35	PEAK	141	86


Vertical

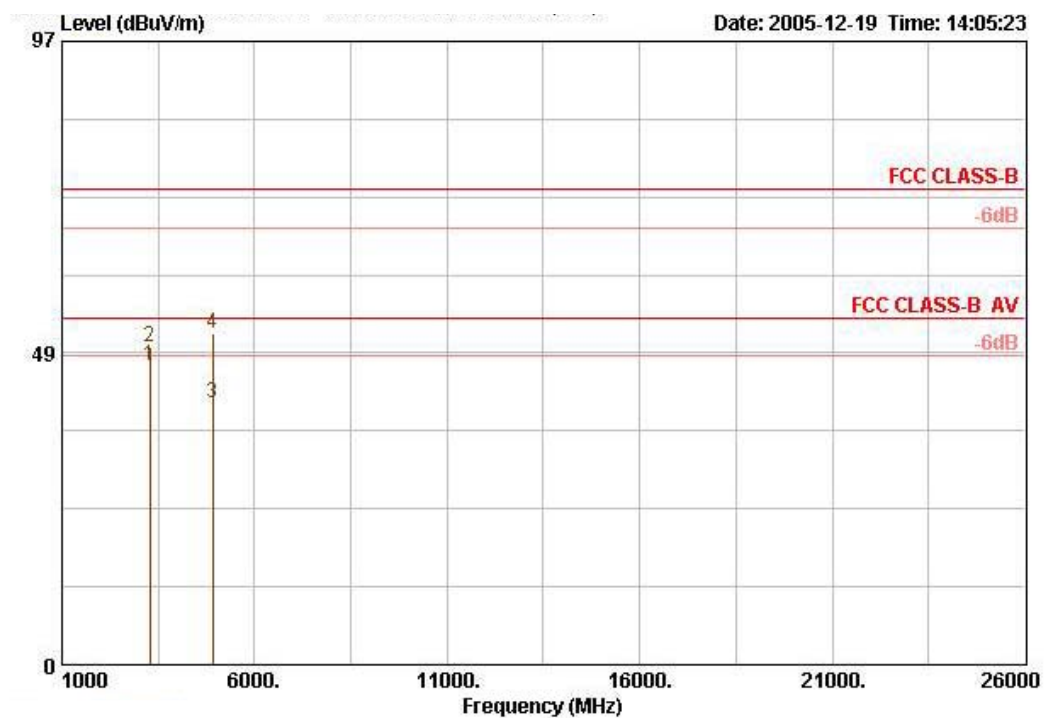

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	3282.680	46.64	-7.36	54.00	30.81	3.12	35.20	47.91	AVERAGE	101	108
2	3282.680	49.40	-24.60	74.00	30.81	3.12	35.20	50.67	PEAK	101	108
3	4924.000	40.81	-13.19	54.00	33.45	4.73	35.10	37.74	AVERAGE	100	90
4	4924.000	51.67	-22.33	74.00	33.45	4.73	35.10	48.59	PEAK	100	90


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Turbo Channel 6

Horizontal

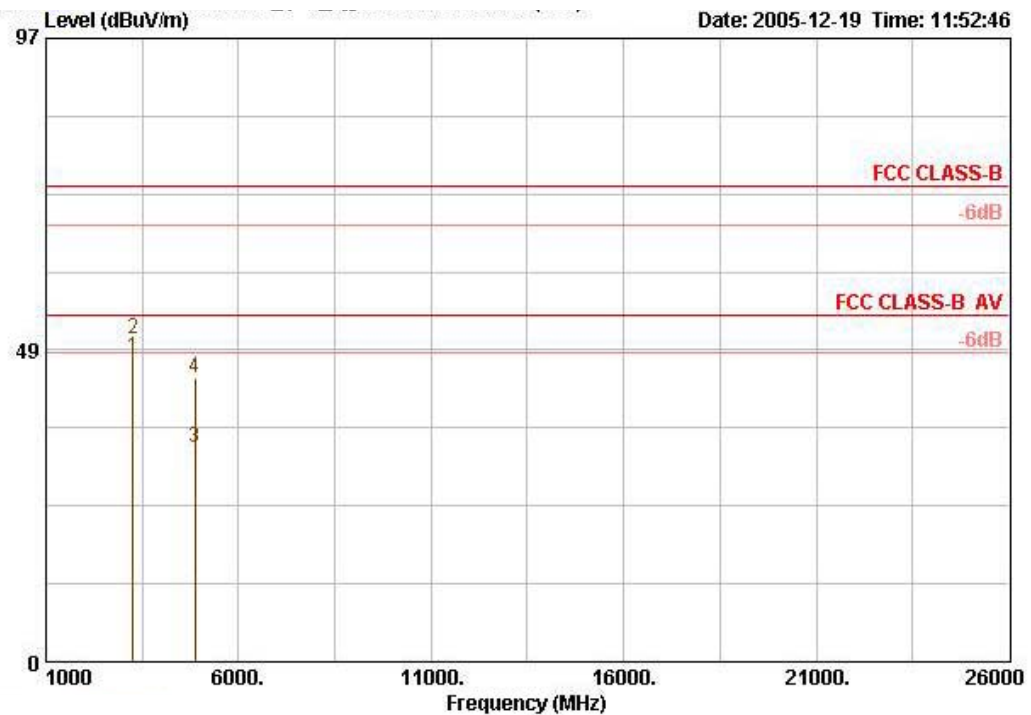

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	3249.360	47.26	-6.74	54.00	30.73	3.08	35.20	48.64	AVERAGE	128	7
2	3249.360	50.10	-23.90	74.00	30.73	3.08	35.20	51.48	PEAK	128	7
3	4878.280	33.34	-20.66	54.00	33.33	4.69	35.10	30.41	AVERAGE	100	84
4	4878.280	44.17	-29.83	74.00	33.33	4.69	35.10	41.25	PEAK	100	84

Vertical

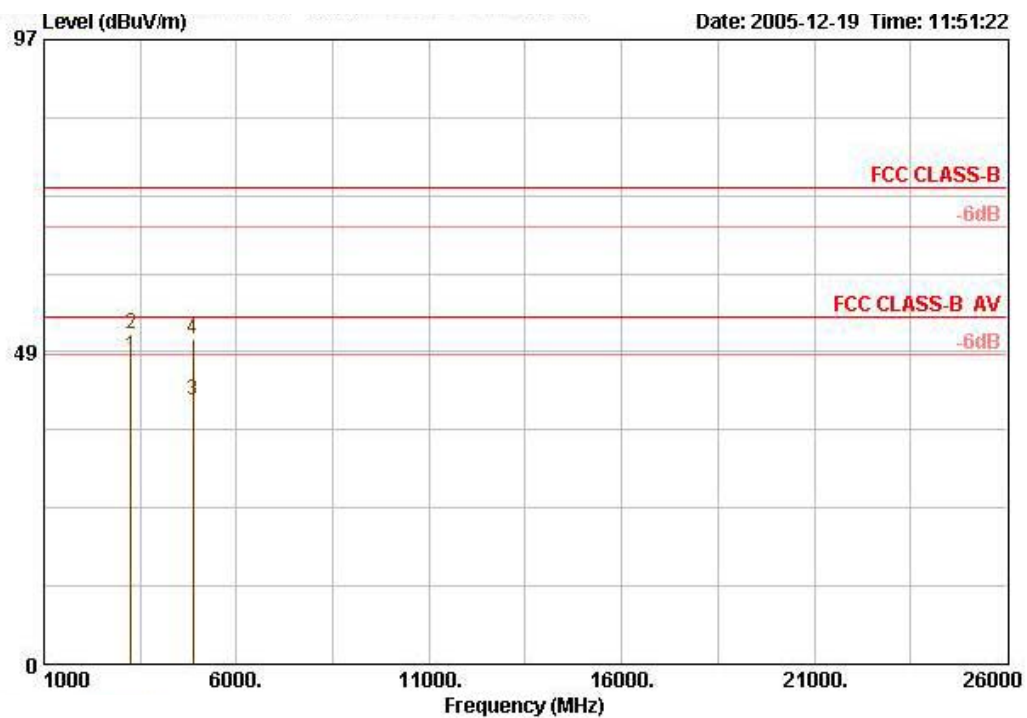

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	3249.320	47.92	-6.08	54.00	30.73	3.08	35.20	49.30	AVERAGE	102	108
2	3249.320	51.27	-22.73	74.00	30.73	3.08	35.20	52.66	PEAK	102	108
3	4871.160	40.89	-13.11	54.00	33.33	4.69	35.10	37.97	AVERAGE	100	90
4	4871.160	50.45	-23.55	74.00	33.33	4.69	35.10	47.52	PEAK	100	90

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 149

Horizontal

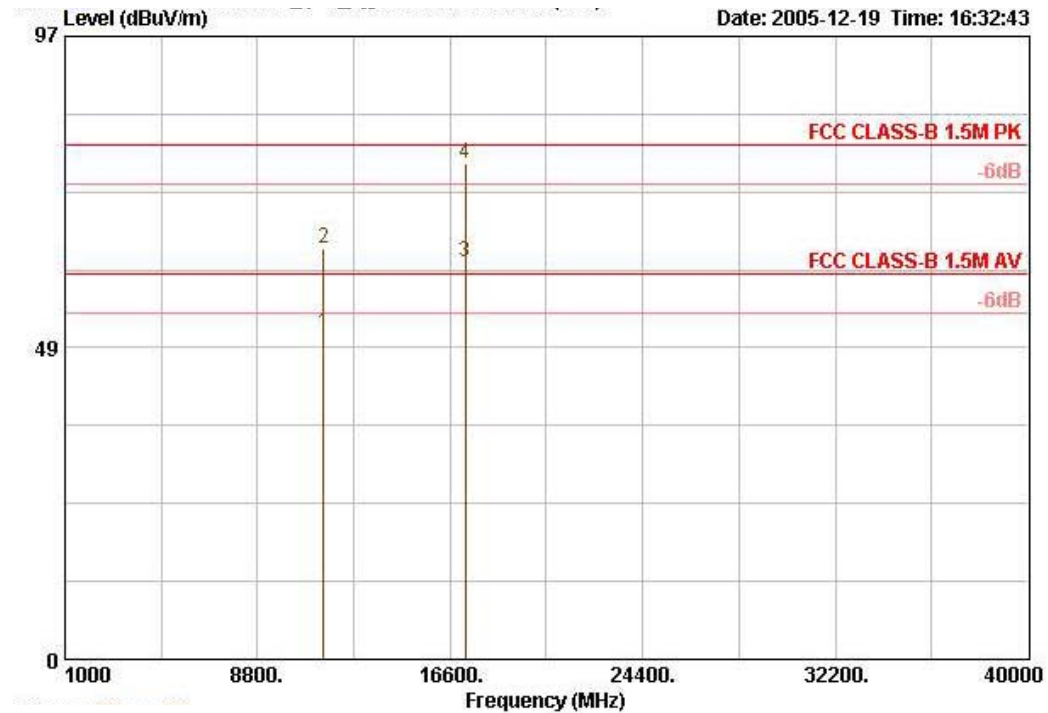

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11489.360	50.84	-9.16	60.00	39.20	6.96	35.10	39.78	AVERAGE	115	227
2	11489.360	63.87	-16.13	80.00	39.20	6.96	35.10	52.81	PEAK	115	227
4	17232.560	77.26	-2.74	80.00	40.93	18.15	35.00	53.18	PEAK	117	227


Vertical

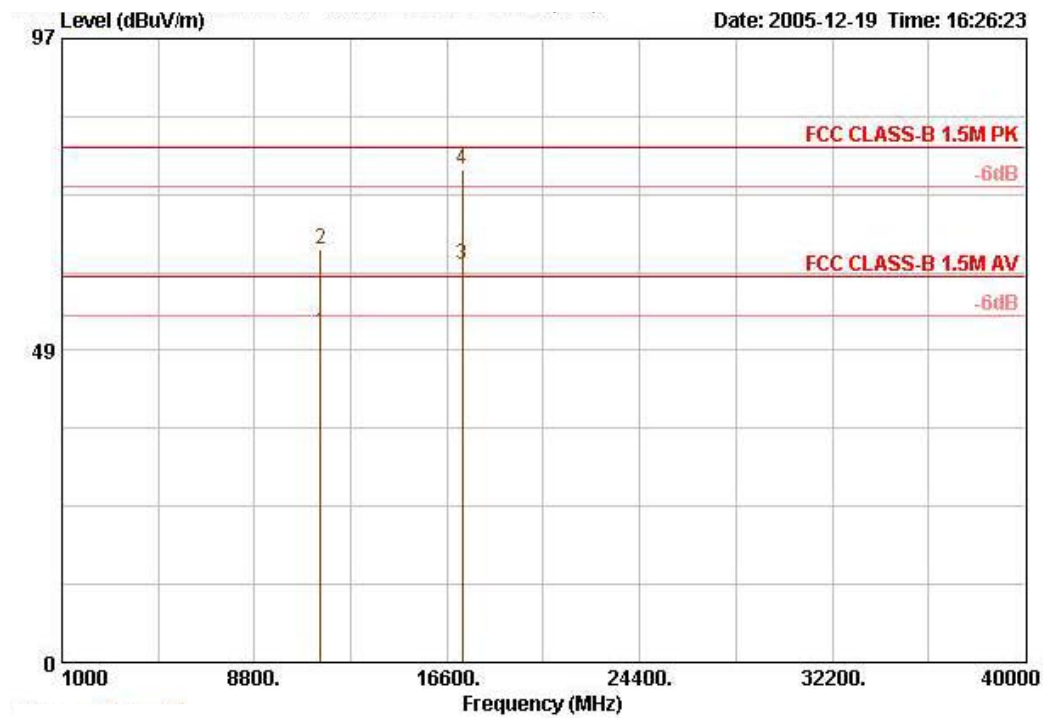

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11488.940	51.30	-8.70	60.00	39.20	6.96	35.10	40.24	AVERAGE	104	250
2	11488.940	64.20	-15.80	80.00	39.20	6.96	35.10	53.14	PEAK	104	250
4	17232.520	76.59	-3.41	80.00	40.93	10.15	35.00	52.51	PEAK	103	207


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 157

Horizontal

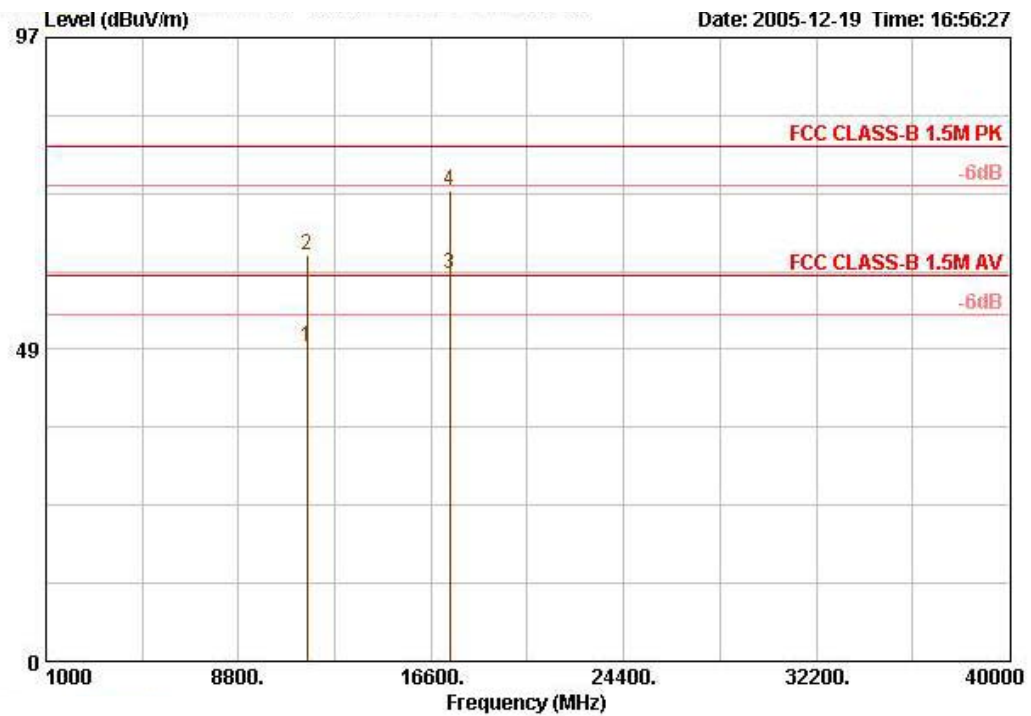

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11569.280	48.98	-11.02	60.00	39.21	7.06	35.12	37.83	AVERAGE	108	226
2	11569.280	63.09	-16.91	80.00	39.21	7.06	35.12	51.95	PEAK	108	226
4	17353.960	73.18	-6.82	80.00	41.44	17.41	35.04	49.37	PEAK	114	225


Vertical

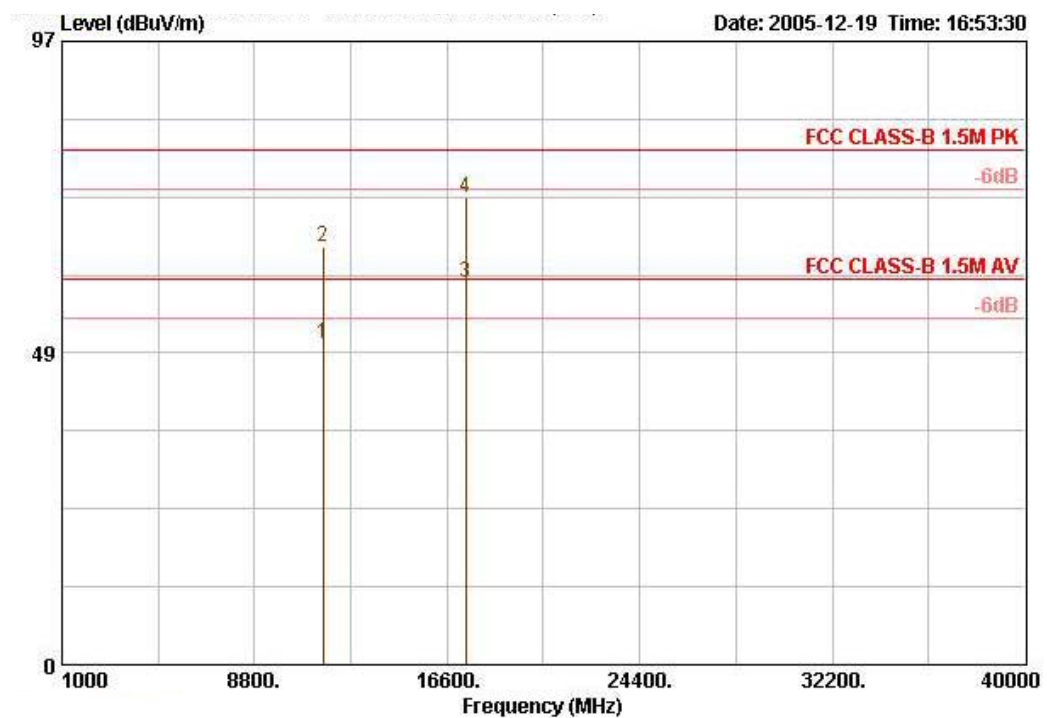

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11569.160	49.96	-10.04	60.00	39.21	7.06	35.12	38.81	AVERAGE	126	246
2	11569.160	65.07	-14.93	80.00	39.21	7.06	35.12	53.93	PEAK	126	246
3 @	17353.760	59.56	-0.44	60.00	41.44	17.41	35.04	35.75	AVERAGE	103	207
4	17356.640	72.67	-7.33	80.00	41.44	17.41	35.04	48.86	PEAK	103	207


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 165

Horizontal

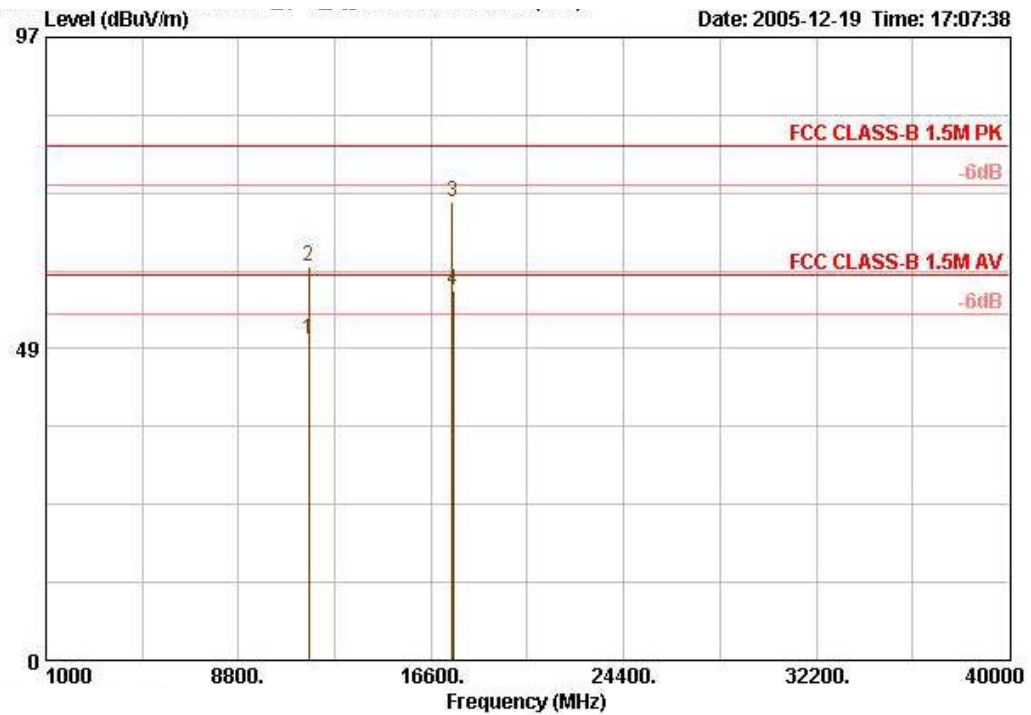

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11650.320	49.90	-10.10	60.00	39.23	7.15	35.16	38.69	AVERAGE	114	250
2	11650.320	61.36	-18.64	80.00	39.23	7.15	35.16	50.14	PEAK	114	250
3	17471.160	71.40	-8.60	80.00	41.95	16.66	35.09	47.87	PEAK	113	228
4 !	17475.480	57.49	-2.51	60.00	41.95	16.66	35.09	33.97	AVERAGE	113	228


Vertical

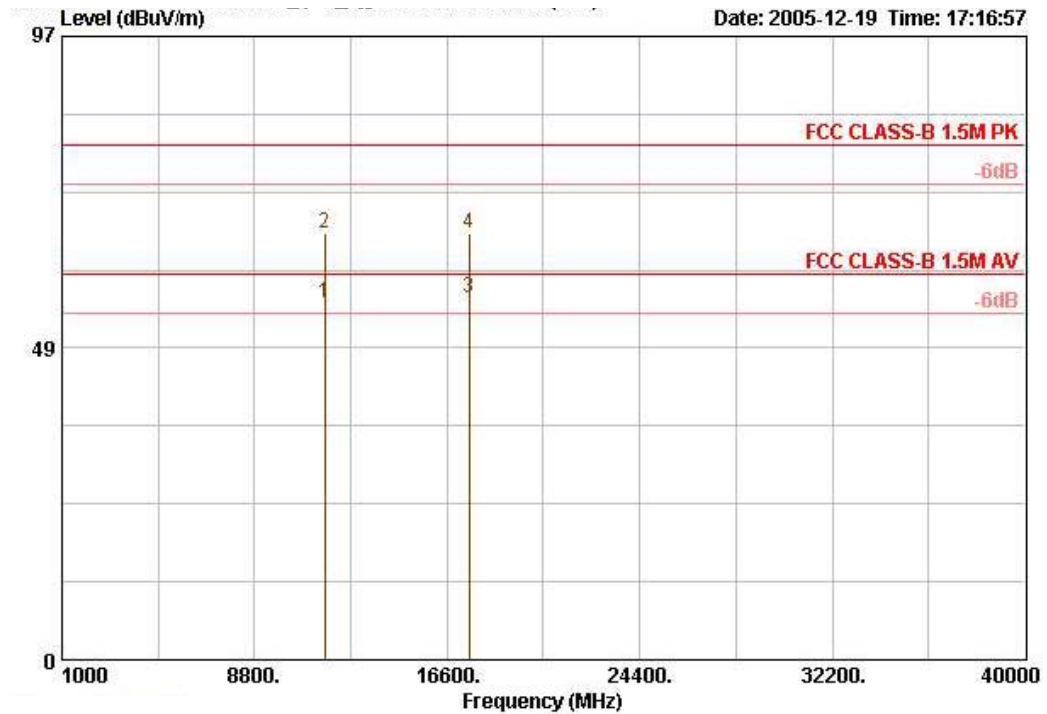

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 !	11650.000	55.58	-4.42	60.00	41.95	16.66	35.09	32.05	AVERAGE	8995	252
2	11650.000	66.43	-13.57	80.00	41.95	16.66	35.09	42.91	PEAK	102	252
3 @	17475.560	56.30	-3.70	60.00	41.95	16.66	35.09	32.78	AVERAGE	101	339
4	17475.560	66.24	-13.76	80.00	41.95	16.66	35.09	42.72	PEAK	101	339


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 152

Horizontal

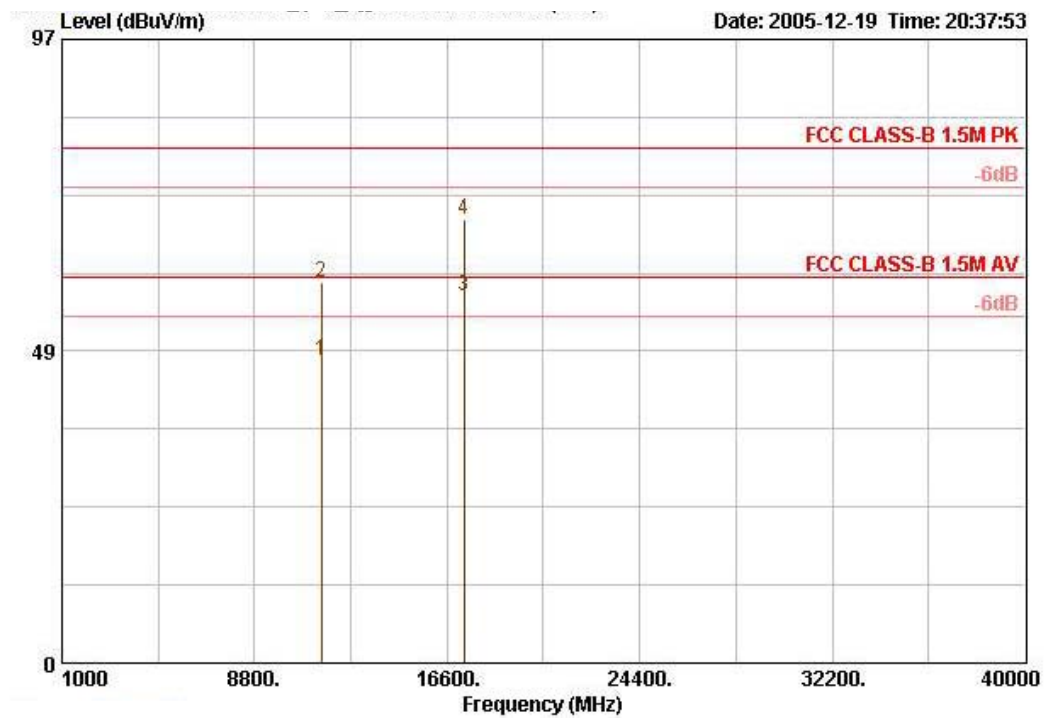

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11518.120	47.16	-12.84	60.00	39.20	7.01	35.10	36.04	AVERAGE	113	226
2	11518.120	59.17	-20.83	80.00	39.20	7.01	35.10	48.06	PEAK	113	226
3 !	17275.680	57.13	-2.87	60.00	41.07	17.90	35.01	33.16	AVERAGE	115	226
4	17275.680	68.89	-11.11	80.00	41.07	17.90	35.01	44.92	PEAK	115	226


Vertical

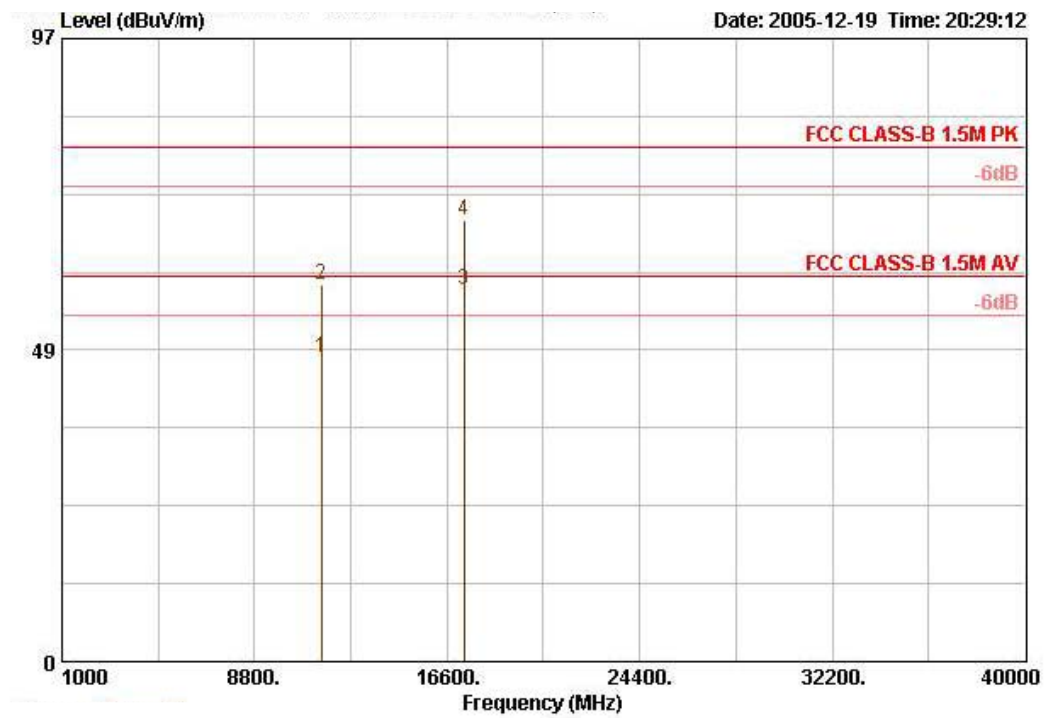

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11520.400	47.42	-12.58	60.00	39.20	7.01	35.11	36.32	AVERAGE	101	250
2	11520.400	58.59	-21.41	80.00	39.20	7.01	35.11	47.49	PEAK	101	250
3 !	17272.800	58.00	-2.00	60.00	41.07	17.90	35.01	34.03	AVERAGE	100	208
4	17272.800	68.59	-11.41	80.00	41.07	17.90	35.01	44.63	PEAK	100	208


Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 160

Horizontal

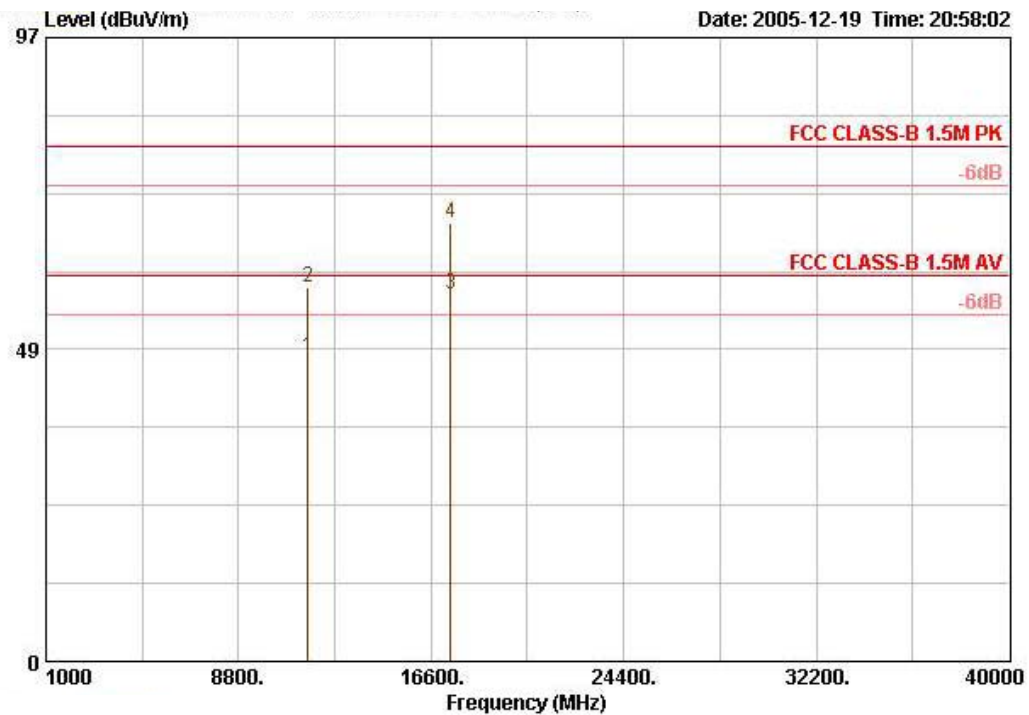

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11599.200	47.29	-12.71	60.00	39.22	7.10	35.14	36.11	AVERAGE	113	226
2	11599.200	58.11	-21.89	80.00	39.22	7.10	35.14	46.93	PEAK	113	226
3 !	17401.700	57.01	-2.99	60.00	41.66	16.91	35.06	33.50	AVERAGE	116	227
4	17401.700	68.19	-11.81	80.00	41.66	16.91	35.06	44.68	PEAK	116	227

Vertical

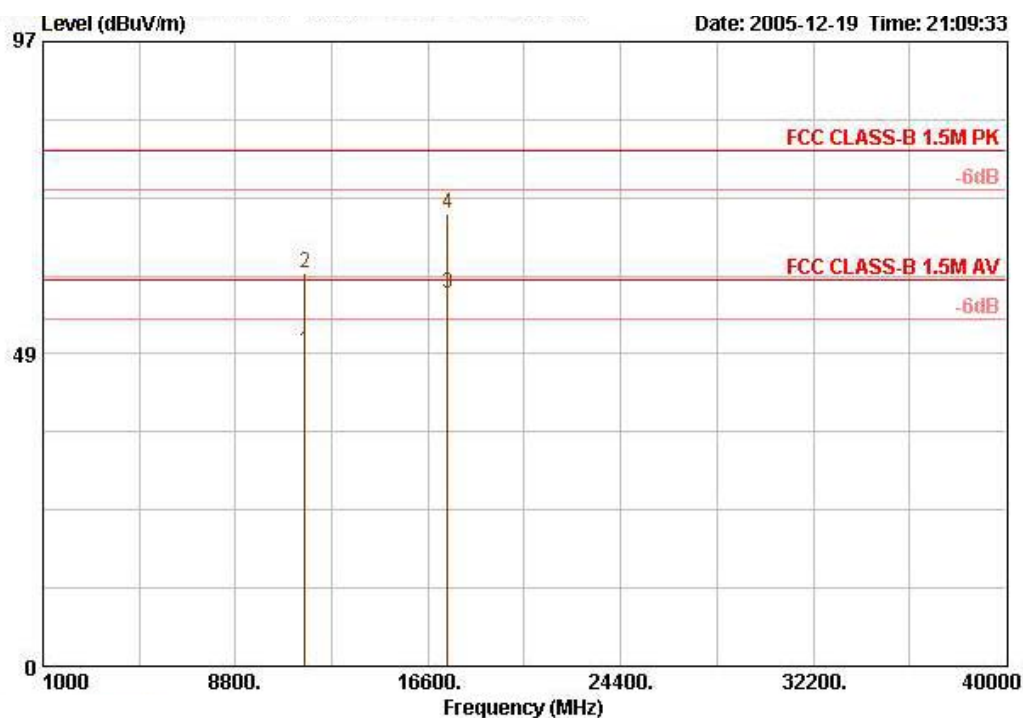

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11598.800	48.97	-11.03	60.00	39.22	7.10	35.14	37.79	AVERAGE	105	248
2	11598.800	61.02	-18.98	80.00	39.22	7.10	35.14	49.84	PEAK	105	248
3 !	17401.700	57.81	-2.19	60.00	41.66	16.91	35.06	34.29	AVERAGE	105	206
4	17401.700	70.29	-9.71	80.00	41.66	16.91	35.06	46.78	PEAK	105	206

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(KHz)	300
0.490 ~ 1.705	24000/F(KHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100 KHz /100 KHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge Emissions

For Emission in Restricted Band

Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11b Channel 1, 11

Channel 1

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	2390.000	53.69	-20.31	74.00	28.13	2.58	0.00	22.98	PEAK	100	159
2	2390.000	44.74	-9.26	54.00	28.13	2.58	0.00	14.03	AVERAGE	100	159

Channel 11

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
3	2483.500	53.87	-20.13	74.00	28.36	2.62	0.00	22.89	PEAK	100	327
4	2483.500	44.67	-9.33	54.00	28.36	2.62	0.00	13.69	AVERAGE	100	327

Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 1, 11

Channel 1

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	2390.000	66.52	-7.48	74.00	28.13	2.58	0.00	35.81	PEAK	147	93
2 @	2390.000	53.68	-0.32	54.00	28.13	2.58	0.00	22.97	AVERAGE	147	93

Channel 11

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
3	2483.500	66.86	-7.14	74.00	28.36	2.62	0.00	35.88	PEAK	100	326
4 @	2483.500	53.23	-0.77	54.00	28.36	2.62	0.00	22.25	AVERAGE	100	326

Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Turbo Channel 6

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	2390.000	53.51	-0.49	54.00	28.13	2.58	0.00	22.80	AVERAGE	100	214
2 !	2390.000	69.62	-4.38	74.00	28.13	2.58	0.00	38.92	PEAK	100	214
5	2483.500	66.44	-7.56	74.00	28.36	2.62	0.00	35.46	PEAK	100	214
6 !	2483.500	52.45	-1.55	54.00	28.36	2.62	0.00	21.47	AVERAGE	100	214

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Receiving maximum band edge emissions are Vertical Polarization /Horizontal Polarization.

For Field Strength


Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11b Channel 1, 6, 11

Channel 01

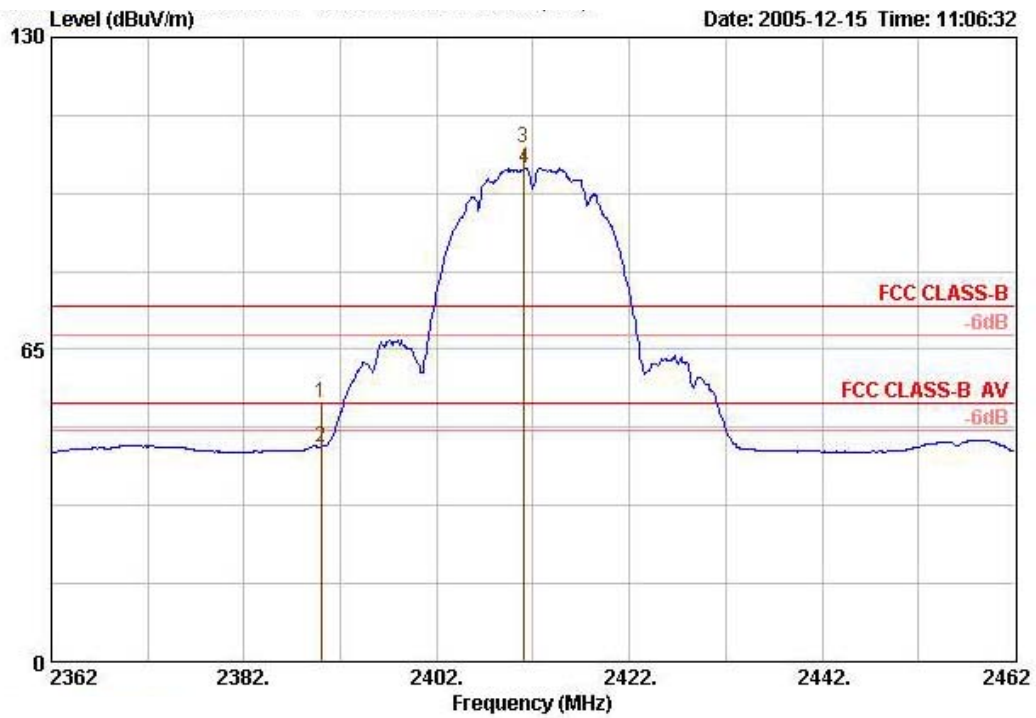


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
3 @	2411.000	106.90	32.90	74.00	28.18	2.58	0.00	76.14	PEAK	100	159
4 @	2411.100	102.71	48.71	54.00	28.18	2.58	0.00	71.96	Average	---	---

Channel 06

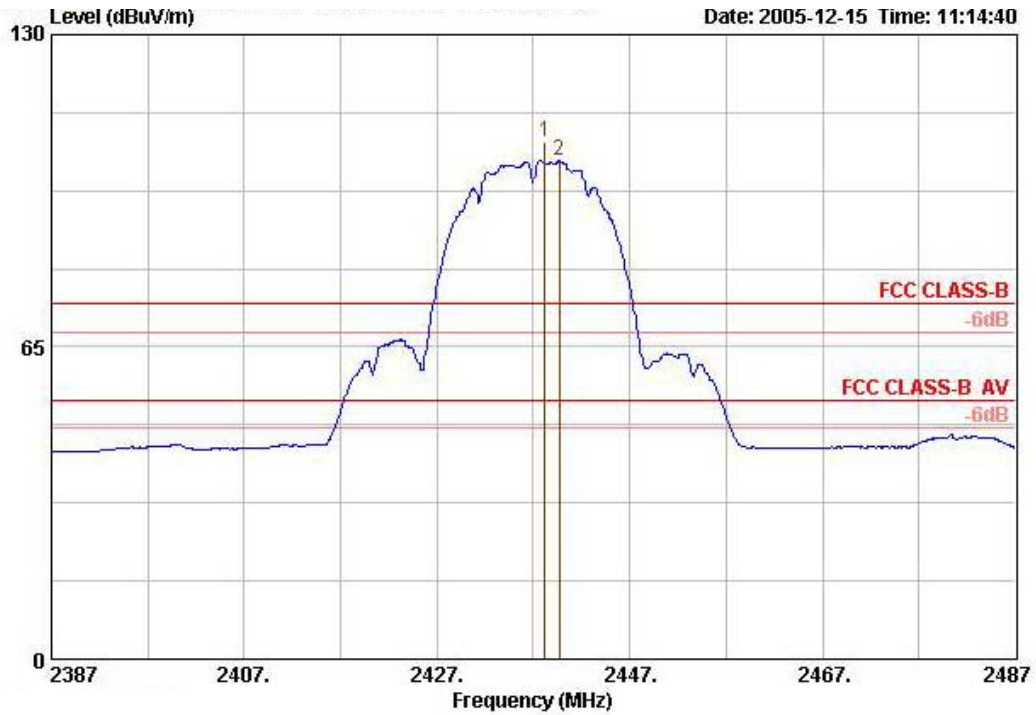

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	2438.200	107.56	33.56	74.00	28.27	2.60	0.00	76.69	PEAK	105	244
2 @	2439.700	103.71	49.71	54.00	28.27	2.60	0.00	72.84	Average	---	---


Channel 11

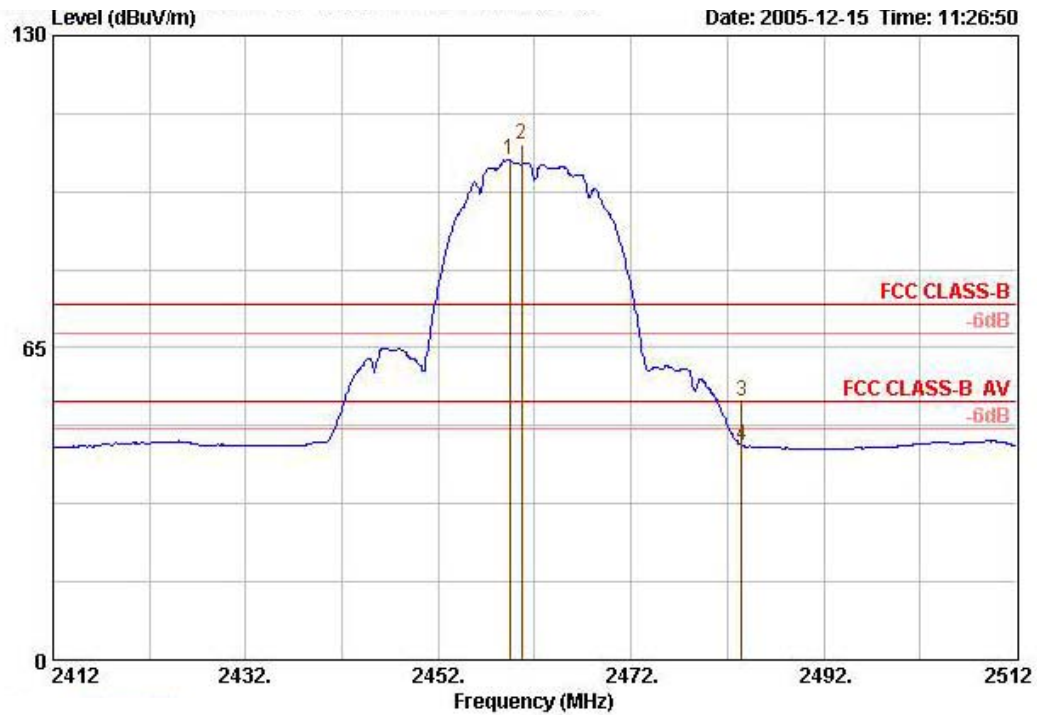

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	2459.400	104.06	50.06	54.00	28.31	2.60	0.00	73.15	Average	---	---
2 @	2460.600	107.36	33.36	74.00	28.31	2.60	0.00	76.45	PEAK	100	327


Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11g Channel 1, 6, 11

Channel 01

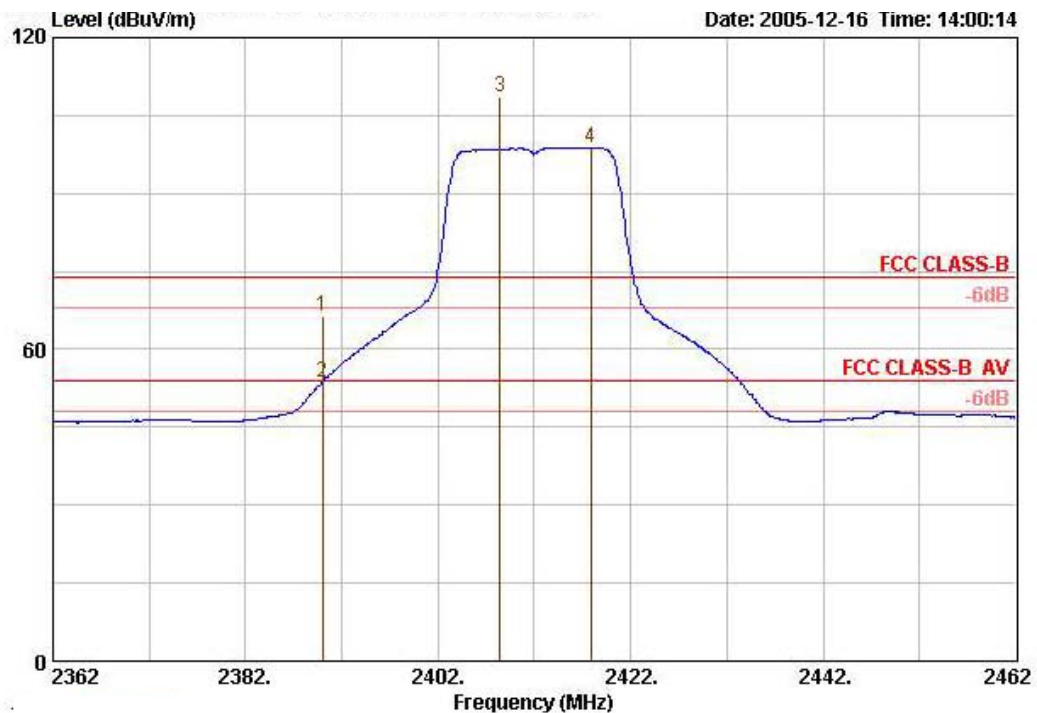


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
3 @	2408.400	108.40	34.40	74.00	28.18	2.58	0.00	77.65	PEAK	147	93
4 @	2417.900	98.85	44.85	54.00	28.18	2.58	0.00	68.10	Average	---	---

Channel 06

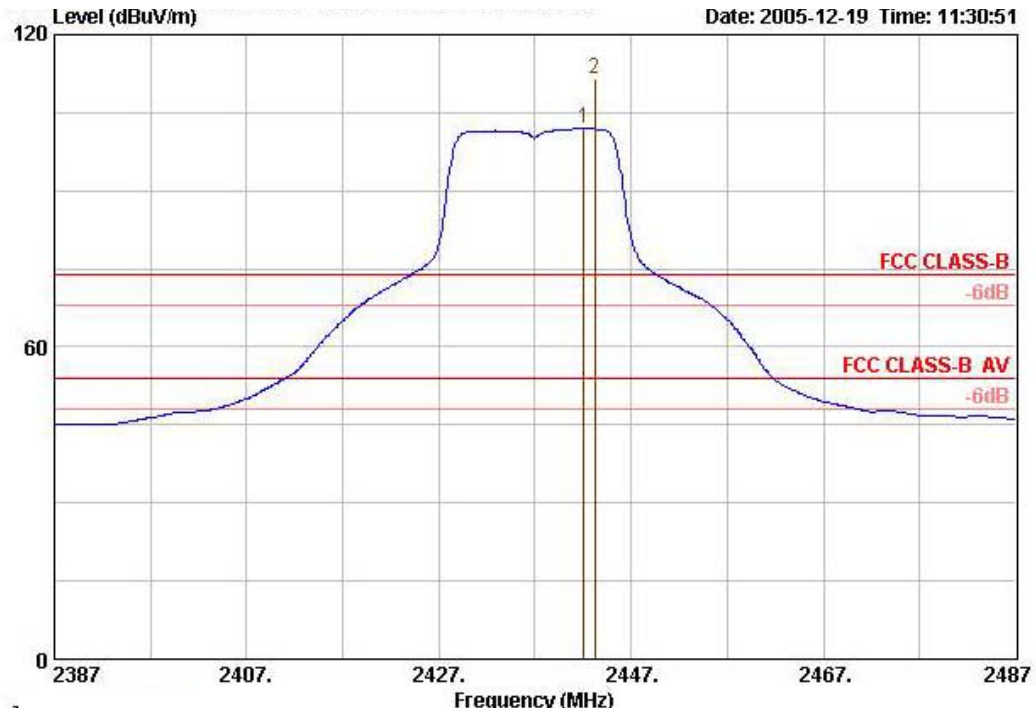

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	2442.100	101.95	47.95	54.00	28.27	2.60	0.00	71.08	Average	---	---
2 @	2443.200	111.56	37.56	74.00	28.27	2.60	0.00	80.69	PEAK	100	213


Channel 11

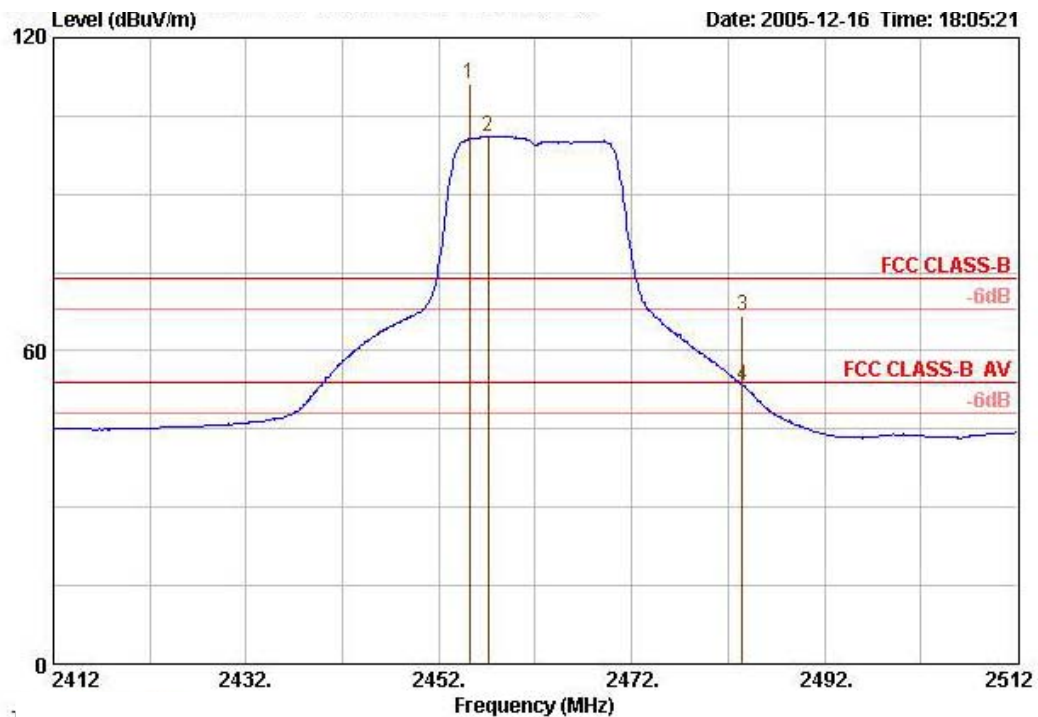

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	2455.200	111.14	37.14	74.00	28.31	2.60	0.00	80.23	PEAK	100	326
2 @	2457.100	101.08	47.08	54.00	28.31	2.60	0.00	70.17	Average	---	---


Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a Channel 149, 157, 165

Channel 149

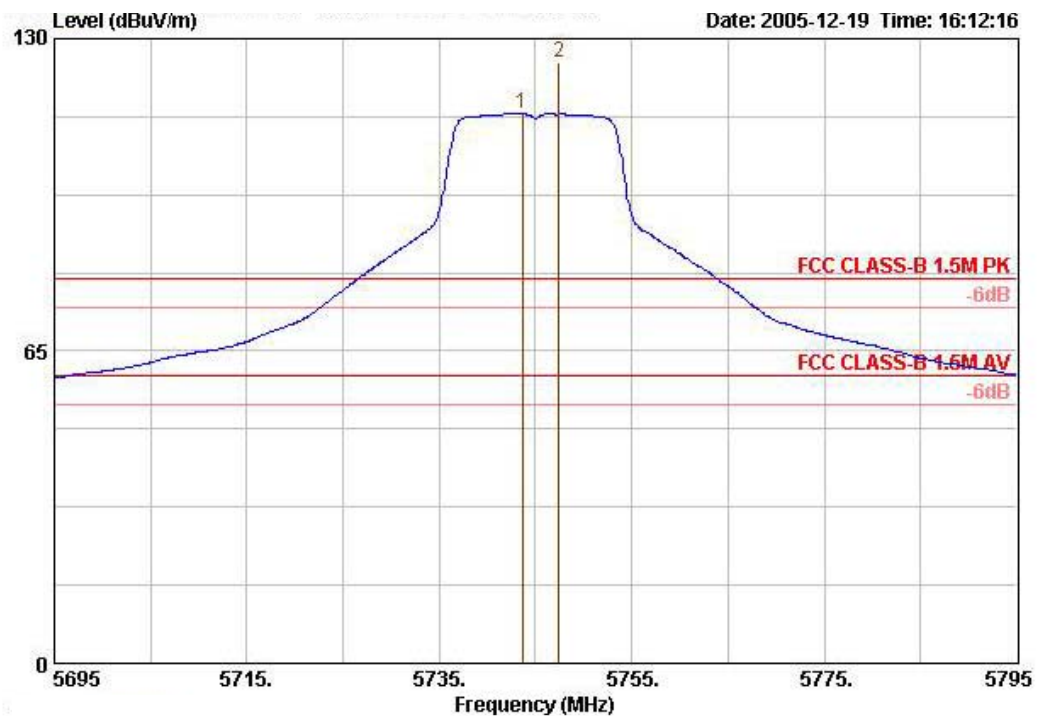


	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	5743.600	114.42	34.42	80.00	34.50	5.26	0.00	74.67	Average	---	---
2 @	5747.400	125.15	45.15	80.00	34.50	5.26	0.00	85.39	PEAK	105	290

Channel 157

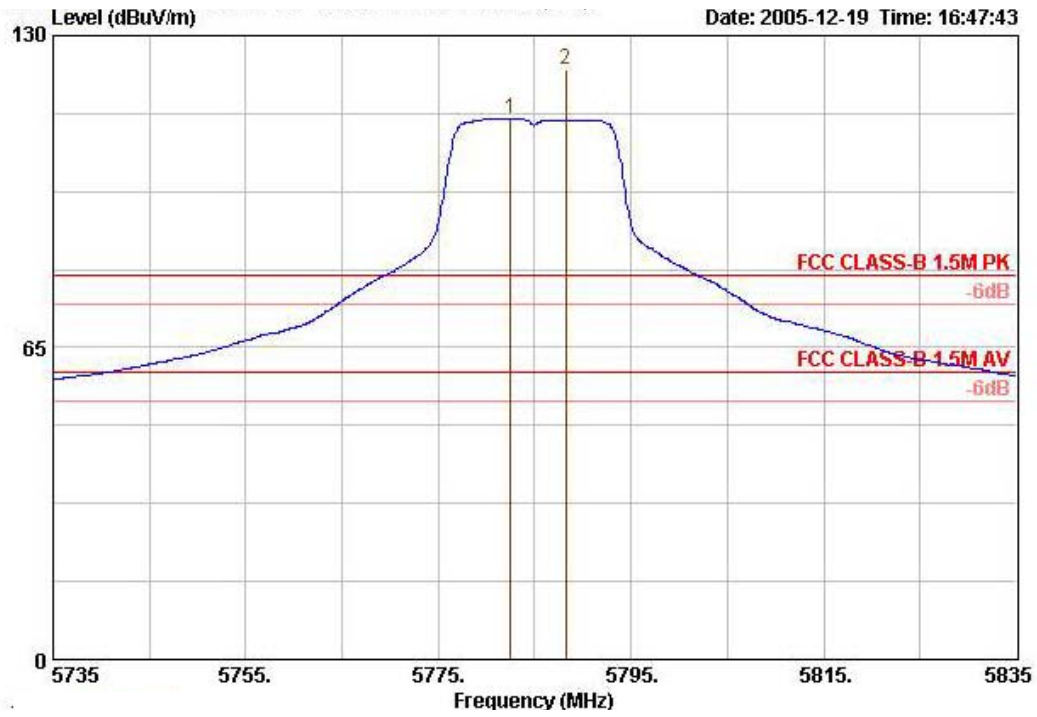

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	5782.500	112.70	52.70	60.00	34.51	5.26	0.00	72.93	Average	---	---
2 @	5788.200	123.07	43.07	80.00	34.52	5.26	0.00	83.29	PEAK	114	46


Channel 165

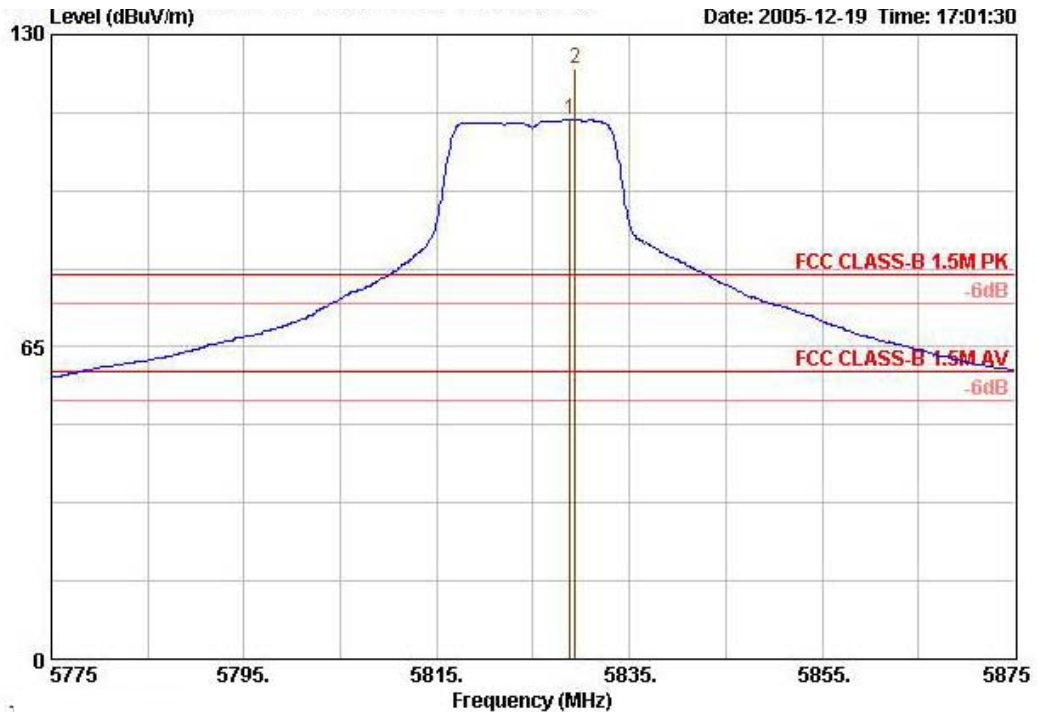

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	5828.800	112.25	52.25	60.00	34.53	5.26	0.00	72.46	Average	---	---
2 @	5829.400	123.06	43.06	80.00	34.53	5.26	0.00	83.27	PEAK	114	47


Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11 a Channel 152, 160

Channel 152

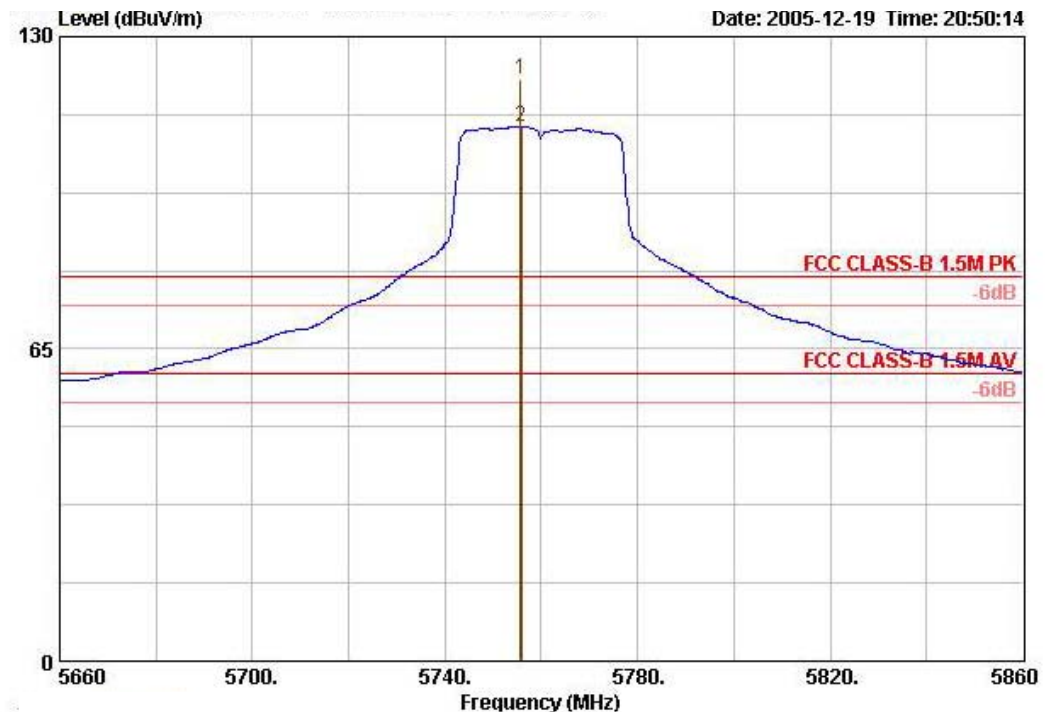

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	5755.600	121.08	41.08	80.00	34.50	5.26	0.00	81.32 PEAK	104	296
2 @	5755.800	111.27	51.27	60.00	34.50	5.26	0.00	71.51 Average	---	---


Channel 160

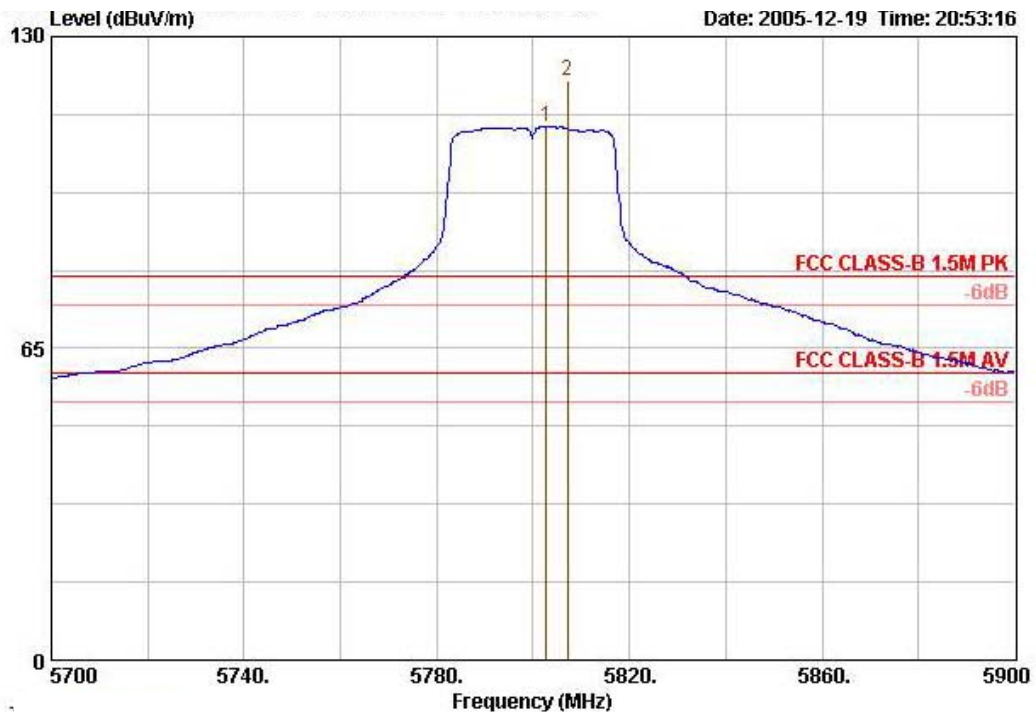

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	5802.800	111.38	51.38	60.00	34.52	5.26	0.00	71.60	Average	---	---
2 @	5807.200	120.89	40.89	80.00	34.52	5.26	0.00	81.10	PEAK	104	296


For Emission not in Restricted Band

Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz

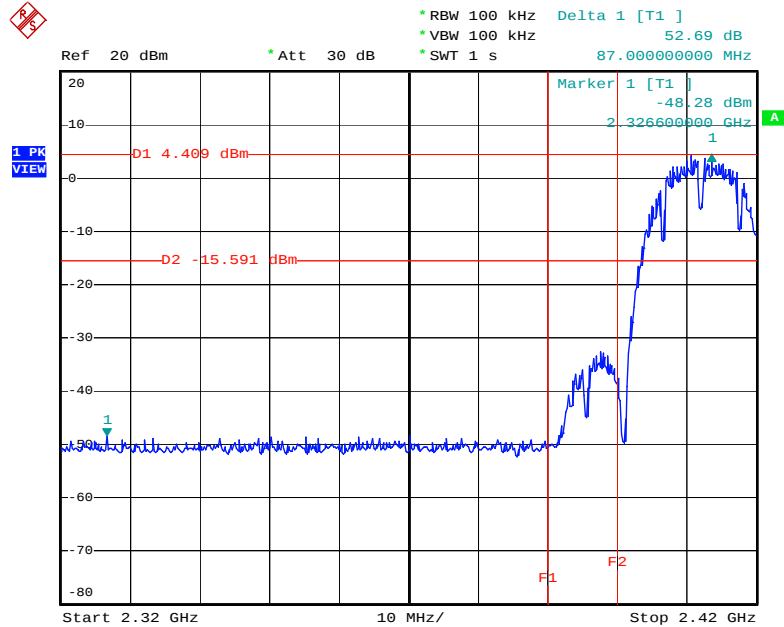


Date: 19.DEC.2005 23:24:26

High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz

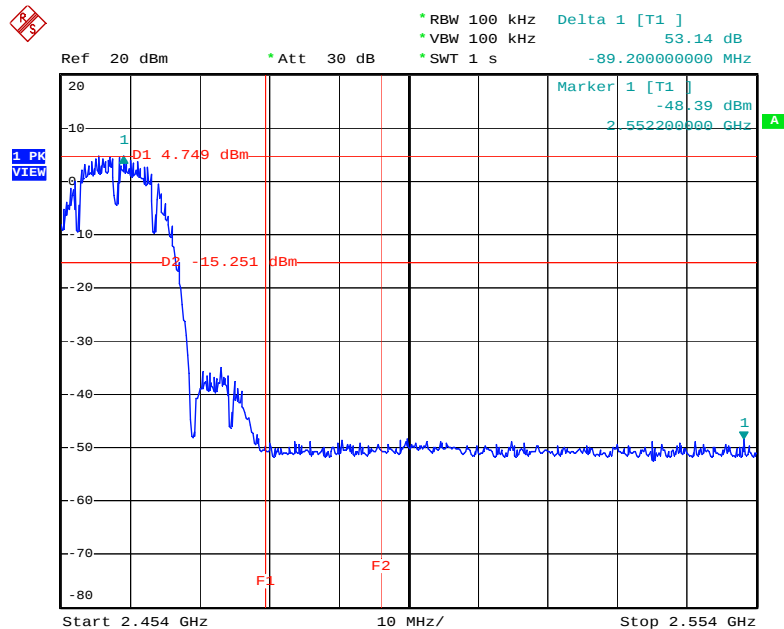


Date: 19.DEC.2005 23:27:39

Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz

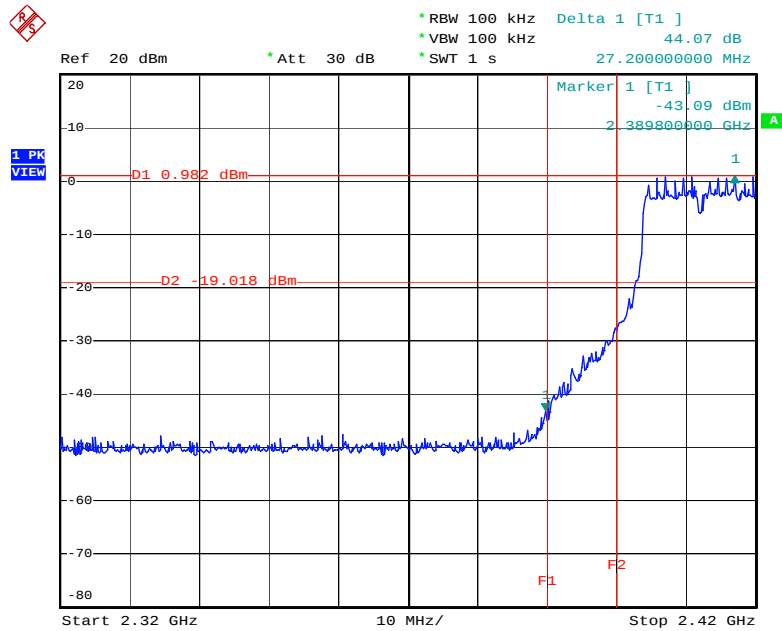


Date: 19.DEC.2005 23:34:03

High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz

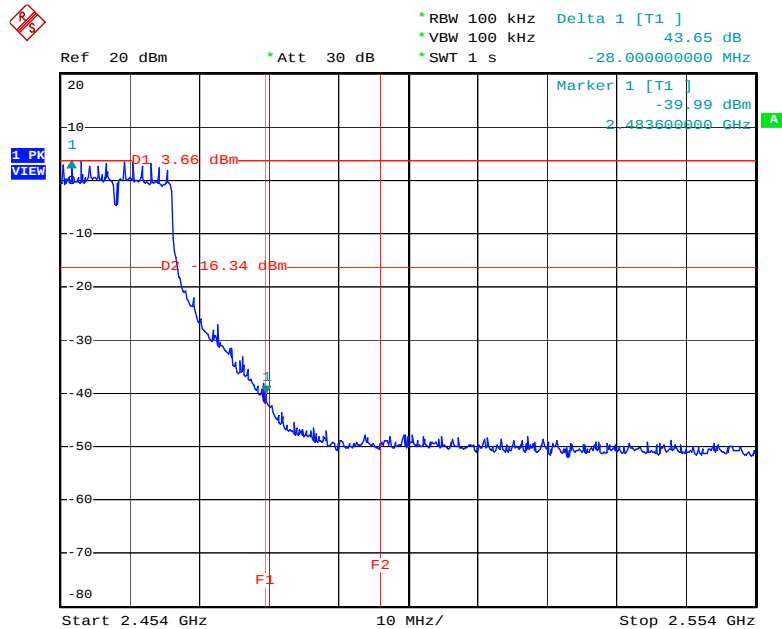


Date: 19.DEC.2005 23:30:51

Low Band Edge Plot on Configuration IEEE 802.11g Turbo / 2437 MHz

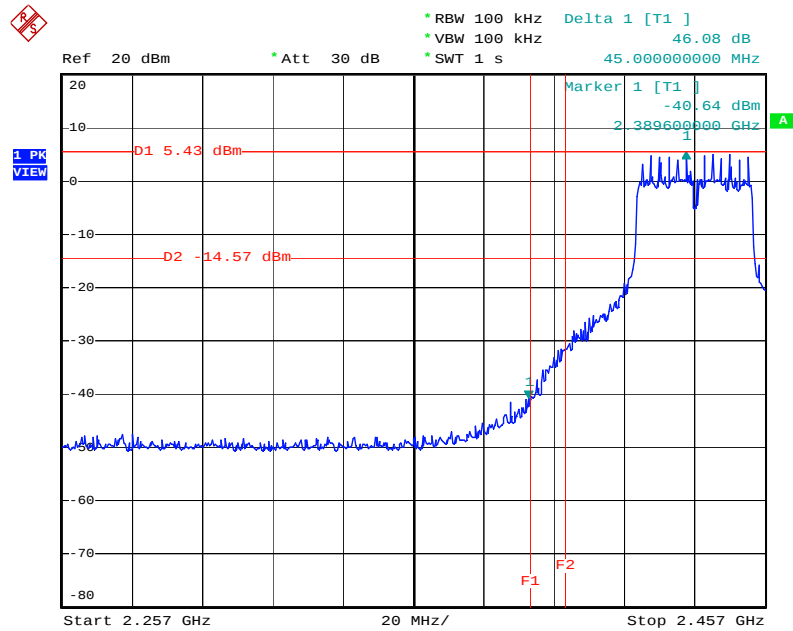


Date: 19.DEC.2005 23:49:34

High Band Edge Plot on Configuration IEEE 802.11g Turbo/ 2437 MHz

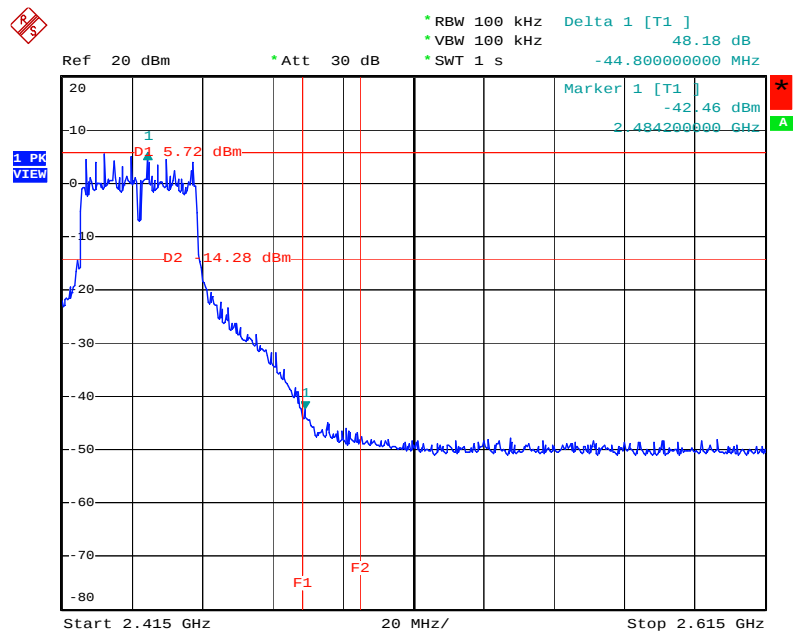


Date: 19.DEC.2005 23:48:04

Low Band Edge Plot on Configuration IEEE 802.11a / 5745 MHz

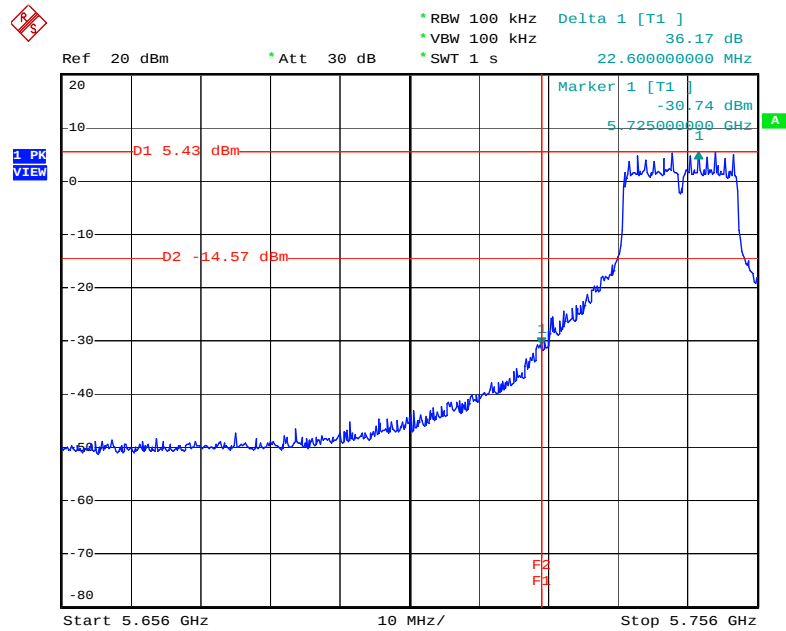


Date: 20.DEC.2005 22:32:09

High Band Edge Plot on Configuration IEEE 802.11a / 5825 MHz

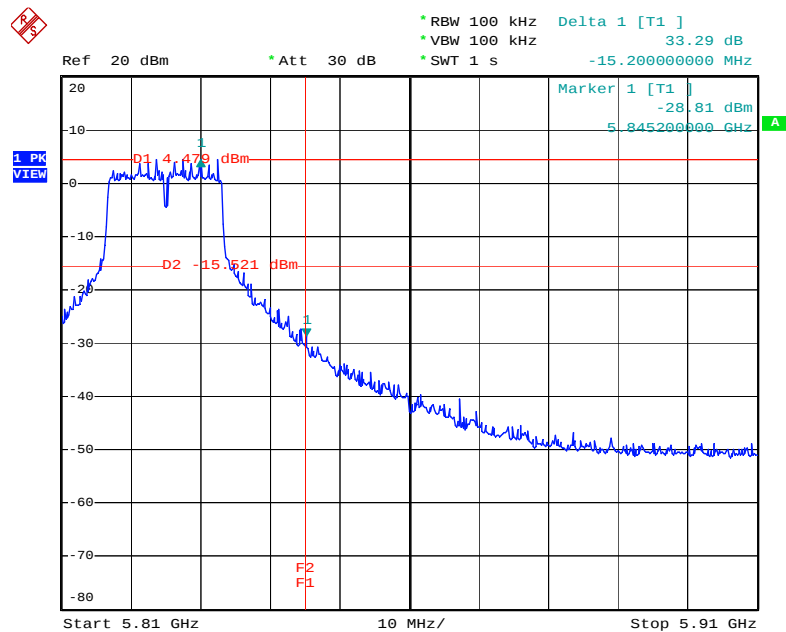


Date: 20.DEC.2005 22:39:04

Low Band Edge Plot on Configuration IEEE 802.11a Turbo / 5760 MHz

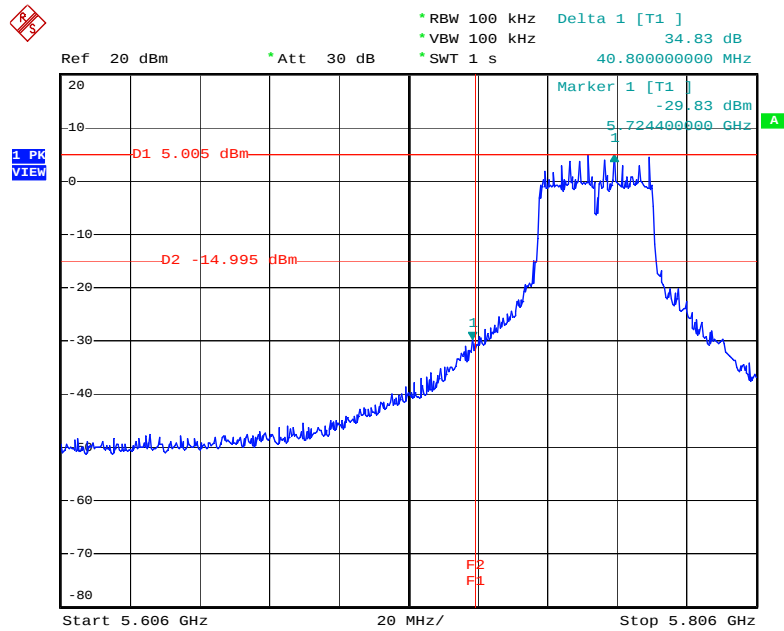

Date: 21.DEC.2005 09:41:57

High Band Edge Plot on Configuration IEEE 802.11a Turbo / 5800 MHz

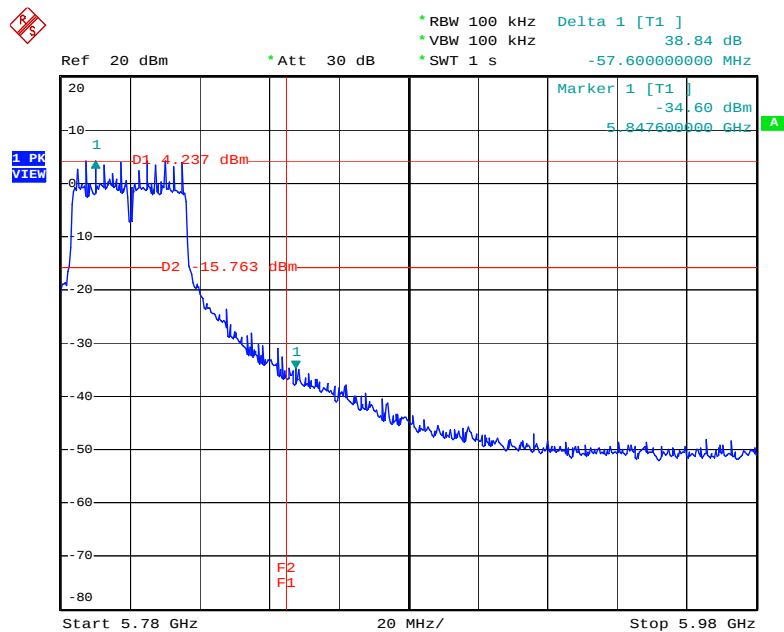

Date: 21.DEC.2005 09:47:18

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

4.7.2. Antenna Connector Construction

Please refer to section 3.2 in this test report, all antenna connectors comply with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 16, 2005	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Dec. 15, 2005	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9708-1839	9kHz – 30MHz	Mar. 14, 2005	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2005	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 16, 2005	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	18667	9 kHz - 2 GHz	Jan. 10, 2005	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 31, 2005	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 30, 2005	Radiation (03CH03-HY)
Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30 MHz - 200 MHz	Jul. 22, 2005	Radiation (03CH03-HY)
Log Antenna	SCHWARZBECK	VUSLP 9111	221	200 MHz - 1 GHz	Jul. 22, 2005	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1 GHz - 18 GHz	Apr. 22, 2005	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Feb. 22, 2005	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec.01, 2005	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 - 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP40	100116	9kHz ~ 40GHz	Jan. 28, 2005	Conducted (TH01-HY)
Power meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
Power sensor	R&S	NRV-Z55	100049	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Apr. 28, 2005	Conducted (TH01-HY)
AC power source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2005	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Jan. 01, 2005	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Jan. 01, 2005	Conducted (TH01-HY)
Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Apr. 15, 2005	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 05, 2004*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 24, 2004*	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jun. 09, 2004*	Radiation (03CH03-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 02, 2005	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year

6. SPORTON COMPANY PROFILE

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test facility apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufactures. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.

6.1. Test Location

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 02-2696-2468 FAX : 02-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 03-327-3456 FAX : 03-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 02-2601-1640 FAX : 02-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 02-2631-4739 FAX : 02-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 02-8227-2020 FAX : 02-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 02-2794-8886 FAX : 02-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. TEL : 03-656-9065 FAX : 03-656-9085

7. NVLAP CERTIFICATE OF ACCREDITATION

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 200079-0

Sporton International, Inc. Hwa Ya EMC Laboratory

Tao Yuan Hsien 333

TAIWAN


*is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in
NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999.*

Accreditation is granted for specific services, listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

2006-01-01 through 2006-12-31

Effective dates



For the National Institute of Standards and Technology